MATLAB®

Function Reference

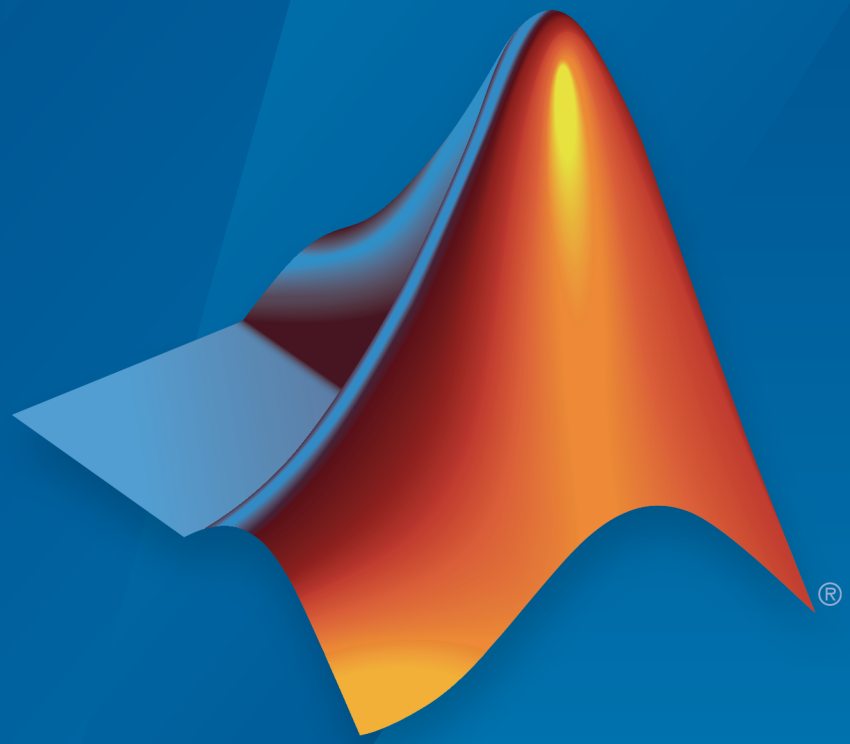

MATLAB®

R2017a

MathWorks®

How to Contact MathWorks

Latest news:	`www.mathworks.com`
Sales and services:	`www.mathworks.com/sales_and_services`
User community:	`www.mathworks.com/matlabcentral`
Technical support:	`www.mathworks.com/support/contact_us`
Phone:	508-647-7000

The MathWorks, Inc.
3 Apple Hill Drive
Natick, MA 01760-2098

MATLAB Function Reference

© COPYRIGHT 1984–2017 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See `www.mathworks.com/trademarks` for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see `www.mathworks.com/patents` for more information.

Revision History

December 1996	First printing	For MATLAB 5.0 (Release 8)
June 1997	Online only	Revised for MATLAB 5.1 (Release 9)
October 1997	Online only	Revised for MATLAB 5.2 (Release 10)
January 1999	Online only	Revised for MATLAB 5.3 (Release 11)
June 1999	Second printing	For MATLAB 5.3 (Release 11)
June 2001	Online only	Revised for MATLAB 6.1 (Release 12.1)
July 2002	Online only	Revised for 6.5 (Release 13)
June 2004	Online only	Revised for 7.0 (Release 14)
September 2006	Online only	Revised for 7.3 (Release 2006b)
March 2007	Online only	Revised for 7.4 (Release 2007a)
September 2007	Online only	Revised for Version 7.5 (Release 2007b)
March 2008	Online only	Revised for Version 7.6 (Release 2008a)
October 2008	Online only	Revised for Version 7.7 (Release 2008b)
March 2009	Online only	Revised for Version 7.8 (Release 2009a)
September 2009	Online only	Revised for Version 7.9 (Release 2009b)
March 2010	Online only	Revised for Version 7.10 (Release 2010a)
September 2010	Online only	Revised for Version 7.11 (Release 2010b)
April 2011	Online only	Revised for Version 7.12 (Release 2011a)
September 2011	Online only	Revised for Version 7.13 (Release 2011b)
March 2012	Online only	Revised for Version 7.14 (Release 2012a)
September 2012	Online only	Revised for Version 8.0 (Release 2012b)
March 2013	Online only	Revised for Version 8.1 (Release 2013a)
September 2013	Online only	Revised for Version 8.2 (Release 2013b)
March 2014	Online only	Revised for Version 8.3 (Release 2014a)
October 2014	Online only	Revised for Version 8.4 (Release 2014b)
March 2015	Online only	Revised for Version 8.5 (Release 2015a)
September 2015	Online only	Revised for Version 8.6 (Release 2015b)
October 2015	Online only	Rereleased for Version 8.5.1 (Release 2015aSP1)
March 2016	Online only	Revised for Version 9.0 (Release 2016a)
September 2016	Online only	Revised for Version 9.1 (Release 2016b)
March 2017	Online only	Revised for Version 9.2 (Release 2017a)

Contents

1 Alphabetical List

Alphabetical List

Logical Operators: Short-Circuit && ||
colon, :
abs
accumarray
acos
acosd
acosh
acot
acotd
acoth
acsc
acscd
acsch
actxcontrol
actxcontrollist
actxcontrolselect
actxGetRunningServer
actxserver
add
matlab.apputil.create
matlab.apputil.getInstalledAppInfo
matlab.apputil.install
matlab.apputil.package
matlab.apputil.run
matlab.apputil.uninstall
addevent
addmulti
audioinfo
audioread
audiowrite
autumn
addOptional

addParameter
addParamValue
addcats
addpath
addpref
addpoints
addprop
addproperty
addRequired
addsampletocollection
addtodate
addts
airy
align
alim
all
allchild
alpha
alphamap
alphaShape
alphaSpectrum
alphaTriangulation
area
boundaryFacets
criticalAlpha
inShape
nearestNeighbor
numRegions
perimeter
plot (alphashape)
surfaceArea
volume
amd
ancestor
and, &
angle
AnimatedLine
animatedline
AnimatedLine Properties
annotation

Arrow Properties
DoubleEndArrow Properties
Ellipse Properties
Annotation Line Properties
Annotation Rectangle Properties
TextArrow Properties
TextBox Properties
ans
any
area
Area Properties
array2table
array2timetable
arrayfun
ascii
asec
asecd
asech
asin
asind
asinh
assert
assignin
atan
atan2
atan2d
atand
atanh
audiodevinfo
audioplayer
audiorecorder
aviinfo
axes
Axes Properties
axis
alphaShape
balance
bandwidth
bar
barh

bar3
bar3h
Bar Properties
baryToCart
base2dec
Baseline Properties
beep
BeginInvoke
bench
besselh
besseli
besselj
besselk
bessely
beta
betainc
betaincinv
betaln
between
bicg
bicgstab
bicgstabl
bin2dec
binary
bitand
bitcmp
bitget
bitnot
bitor
bitset
bitshift
bitxor
blanks
blkdiag
bone
boundary
bounds
box
break
brighten

brush
bsxfun
builddocsearchdb
builtin
bvp4c
bvp5c
bvpget
bvpinit
bvpset
bvpxtend
caldays
caldiff
calendar
calendarDuration
calllib
callSoapService
calmonths
calquarters
calweeks
calyears
camdolly
cameratoolbar
camlight
camlookat
camorbit
campan
campos
camproj
camroll
camtarget
camup
camva
camzoom
cartToBary
cart2pol
cart2sph
cast
cat
categorical
CategoricalRuler Properties

categories
caxis
cd
convexHull
cd
cdf2rdf
cdfepoch
cdfinfo
cdflib
cdflib.close
cdflib.closeVar
cdflib.computeEpoch
cdflib.computeEpoch16
cdflib.create
cdflib.createAttr
cdflib.createVar
cdflib.delete
cdflib.deleteAttr
cdflib.deleteAttrEntry
cdflib.deleteAttrgEntry
cdflib.deleteVar
cdflib.deleteVarRecords
cdflib.epoch16Breakdown
cdflib.epochBreakdown
cdflib.getAttrEntry
cdflib.getAttrgEntry
cdflib.getAttrMaxEntry
cdflib.getAttrMaxgEntry
cdflib.getAttrName
cdflib.getAttrNum
cdflib.getAttrScope
cdflib.getCacheSize
cdflib.getChecksum
cdflib.getCompression
cdflib.getCompressionCacheSize
cdflib.getConstantNames
cdflib.getConstantValue
cdflib.getCopyright
cdflib.getFileBackward
cdflib.getFormat

cdflib.getLibraryCopyright
cdflib.getLibraryVersion
cdflib.getMajority
cdflib.getName
cdflib.getNumAttrEntries
cdflib.getNumAttrgEntries
cdflib.getNumAttributes
cdflib.getNumgAttributes
cdflib.getReadOnlyMode
cdflib.getStageCacheSize
cdflib.getValidate
cdflib.getVarAllocRecords
cdflib.getVarBlockingFactor
cdflib.getVarCacheSize
cdflib.getVarCompression
cdflib.getVarData
cdflib.getVarMaxAllocRecNum
cdflib.getVarMaxWrittenRecNum
cdflib.getVarsMaxWrittenRecNum
cdflib.getVarName
cdflib.getVarNum
cdflib.getVarNumRecsWritten
cdflib.getVarPadValue
cdflib.getVarRecordData
cdflib.getVarReservePercent
cdflib.getVarSparseRecords
cdflib.getVersion
cdflib.hyperGetVarData
cdflib.hyperPutVarData
cdflib.inquire
cdflib.inquireAttr
cdflib.inquireAttrEntry
cdflib.inquireAttrgEntry
cdflib.inquireVar
cdflib.open
cdflib.putAttrEntry
cdflib.putAttrgEntry
cdflib.putVarData
cdflib.putVarRecordData
cdflib.renameAttr

cdflib.renameVar
cdflib.setCacheSize
cdflib.setChecksum
cdflib.setCompression
cdflib.setCompressionCacheSize
cdflib.setFileBackward
cdflib.setFormat
cdflib.setMajority
cdflib.setReadOnlyMode
cdflib.setStageCacheSize
cdflib.setValidate
cdflib.setVarAllocBlockRecords
cdflib.setVarBlockingFactor
cdflib.setVarCacheSize
cdflib.setVarCompression
cdflib.setVarInitialRecs
cdflib.setVarPadValue
cdflib.SetVarReservePercent
cdflib.setVarsCacheSize
cdflib.setVarSparseRecords
cdfread
cdfwrite
ceil
cell
cell2mat
cell2struct
cell2table
celldisp
cellfun
cellplot
cellstr
cgs
char
checkcode
checkin
checkout
chol
cholupdate
circshift
circumcenters

cla
clabel
class
classdef
classUnderlying
clc
clear
clearAllMemoizedCaches
clearCache
clearpoints
clearvars
clear (serial)
clf
clipboard
clock
close
close
close
closereq
cmopts
cmpermute
cmunique
colamd
colorbar
Colorbar Properties
colorcube
colordef
colormap
colormapeditor
ColorSpec (Color Specification)
colperm
Combine
comet
comet3
commandhistory
commandwindow
compan
compass
complex
compose

computeStrip
computeTile
computer
cond
condeig
condest
coneplot
conj
contains
continue
contour
contour3
contourc
contourf
Contour Properties
contourslice
matlab.unittest.constraints
matlab.unittest.constraints.AbsoluteTolerance
matlab.unittest.constraints.AnyCellOf
matlab.unittest.constraints.AnyElementOf
matlab.unittest.constraints.BooleanConstraint
getNegativeDiagnosticFor
matlab.unittest.constraints.CellComparator
matlab.unittest.constraints.Constraint
getDiagnosticFor
satisfiedBy
matlab.unittest.constraints.ContainsSubstring
matlab.unittest.constraints.EndsWithSubstring
matlab.unittest.constraints.Eventually
matlab.unittest.constraints.EveryCellOf
matlab.unittest.constraints.EveryElementOf
matlab.unittest.constraints.HasElementCount
matlab.unittest.constraints.HasField
matlab.unittest.constraints.HasInf
matlab.unittest.constraints.HasLength
matlab.unittest.constraints.HasNaN
matlab.unittest.constraints.HasSize
matlab.unittest.constraints.HasUniqueElements
matlab.unittest.constraints.IsAnything
matlab.unittest.constraints.IsEmpty

matlab.unittest.constraints.IsFalse
matlab.unittest.constraints.IsFinite
matlab.unittest.constraints.IsGreaterThan
matlab.unittest.constraints.IsGreaterThanOrEqualTo
matlab.unittest.constraints.IsEqualTo
matlab.unittest.constraints.IsInstanceOf
matlab.unittest.constraints.IsLessThan
matlab.unittest.constraints.IsLessThanOrEqualTo
matlab.unittest.constraints.IsOfClass
matlab.unittest.constraints.IsReal
matlab.unittest.constraints.IsSameHandleAs
matlab.unittest.constraints.IsScalar
matlab.unittest.constraints.IsSparse
matlab.unittest.constraints.IsSubsetOf
matlab.unittest.constraints.IsSubstringOf
matlab.unittest.constraints.IssuesNoWarnings
matlab.unittest.constraints.IssuesWarnings
matlab.unittest.constraints.IsSupersetOf
matlab.unittest.constraints.IsTrue
matlab.unittest.constraints.LogicalComparator
matlab.unittest.constraints.Matches
matlab.unittest.constraints.NumericComparator
matlab.unittest.constraints.ObjectComparator
matlab.unittest.constraints.PublicPropertyComparator
supportingAllValues
matlab.unittest.constraints.RelativeTolerance
matlab.unittest.constraints.ReturnsTrue
matlab.unittest.constraints.StartsWithSubstring
matlab.unittest.constraints.StringComparator
matlab.unittest.constraints.StructComparator
matlab.unittest.constraints.TableComparator
matlab.unittest.constraints.Throws
matlab.unittest.constraints.Tolerance
getDiagnosticFor
satisfiedBy
supports
contrast
conv
conv2
convhull

convhulln
convn
copper
matlab.mixin.CustomDisplay
convertDimensionsToString
displayEmptyObject
displayNonScalarObject
displayPropertyGroups
displayScalarHandleToDeletedObject
displayScalarObject
getClassNameForHeader
getDeletedHandleText
getDetailedFooter
getDetailedHeader
getFooter
getHandleText
getHeader
getPropertyGroups
getSimpleHeader
matlab.mixin.Copyable
copy
copyElement
copyfile
copyobj
corrcoef
cos
cosd
cosh
cot
cotd
coth
count
countcats
cov
cplxpair
cputime
RandStream.create
createClassFromWsdl
createSoapMessage
cross

csc
cscd
csch
csvread
ctranspose, '
csvwrite
cummax
cummin
cumprod
cumsum
cumtrapz
curl
currentDirectory
customverctrl
cylinder
daqread
daspect
datacursormode
datastore
countEachLabel
FileDatastore
hasdata
ImageDatastore
KeyValueDatastore
numpartitions
partition
preview
read
readall
readimage
reset
sheetnames
shuffle
splitEachLabel
SpreadsheetDatastore
TabularTextDatastore
TallDatastore
datatipinfo
date
datenum

dateshift
datestr
datetick
datetime
datetime Properties
DatetimeRuler Properties
datevec
day
days
dbclear
dbcont
dbdown
dblquad
dbmex
dbquit
dbstack
dbstatus
dbstep
dbstop
dbtype
dbup
dde23
ddeget
ddensd
ddesd
ddeset
deal
deblank
dec2base
dec2bin
dec2hex
decic
deconv
deg2rad
del2
DelaunayTri
DelaunayTri
delaunay
delaunayn
delaunayTriangulation

convexHull
isInterior
voronoiDiagram
delete
delete (COM)
delete
delete (serial)
deleteproperty
delevent
delsamplefromcollection
demo
det
details
detectImportOptions
detrend
deval
diag
matlab.unittest.diagnostics
matlab.unittest.diagnostics.ConstraintDiagnostic
addCondition
addConditionsFrom
getDisplayableString
getPreDescriptionString
getPostDescriptionString
getPostConditionString
getPostActValString
getPostExpValString
matlab.unittest.diagnostics.Diagnostic
diagnose
join
matlab.unittest.diagnostics.DiagnosticResult
matlab.unittest.diagnostics.DisplayDiagnostic
matlab.unittest.diagnostics.FigureDiagnostic
matlab.unittest.diagnostics.FileArtifact
copyTo
matlab.unittest.diagnostics.FunctionHandleDiagnostic
matlab.unittest.diagnostics.LoggedDiagnosticEventData
matlab.unittest.diagnostics.ScreenshotDiagnostic
matlab.unittest.diagnostics.StringDiagnostic
dialog

diary
diff
diffuse
condensation
flipedge
indegree
isdag
outdegree
predecessors
successors
toposort
transclosure
transreduction
digraph
digraph
dir
dir
discretize
disp
disp (serial)
display
dither
divergence
dlmread
dlmwrite
dmperm
doc
docsearch
dos
dot
double
dragrect
drawnow
dsearchn
duration
DurationRuler Properties
dynamicprops
echo
echodemo
edgeAttachments

edges
edit
eig
eigs
ellipj
ellipke
ellipsoid
empty
enableNETfromNetworkDrive
enableservice
end
EndInvoke
endsWith
eomday
enumeration
eps
eq, ==
erase
eraseBetween
erf
erfc
erfcinv
erfcx
erfinv
error
errorbar
ErrorBar Properties
errordlg
etime
etree
etreeplot
eval
evalc
evalin
event.DynamicPropertyEvent
event.EventData
event.hasListener
event.listener
event.PropertyEvent
event.proplistener

eventlisteners
events
events (COM)
exceltime
Execute
exist
exit
exp
expint
expm
expm1
export2wsdlg
exportsetupdlg
extractAfter
extractBefore
extractBetween
eye
ezcontour
ezcontourf
ezmesh
ezmeshc
ezplot
ezplot3
ezpolar
ezsurf
ezsurfc
faceNormals
factor
factorial
false
fclose
fclose (serial)
fcontour
feather
featureEdges
feof
ferror
feval
fewerbins
Feval (COM)

fft
fft2
fftn
fftshift
fftw
fgetl
fgetl (serial)
fgets
fgets (serial)
fieldnames
figure
Figure Properties
figurepalette
fileattrib
filebrowser
fileDatastore
filemarker
fileparts
fileread
filesep
fill
fill3
fillmissing
filloutliers
filter
filter2
fimplicit
fimplicit3
find
findall
findfigs
findgroups
findobj
findstr
finish
fitsdisp
fitsinfo
fitsread
fitswrite
fix

matlab.unittest.fixtures
matlab.unittest.fixtures.CurrentFolderFixture
matlab.unittest.fixtures.Fixture
applyFixture
log
setup
teardown
addTeardown
isCompatible
matlab.unittest.fixtures.PathFixture
matlab.unittest.fixtures.SuppressedWarningsFixture
matlab.unittest.fixtures.TemporaryFolderFixture
matlab.unittest.fixtures.WorkingFolderFixture
flag
flintmax
flip
flipdim
fliplr
flipud
floor
flow
fmesh
fminbnd
fminsearch
fopen
fopen (serial)
for
format
fplot
fplot3
fprintf
fprintf (serial)
frame2im
fread
fread (serial)
freeBoundary
freqspace
frewind
fscanf
fscanf (serial)

fseek
fsurf
ftell
FTP
full
fullfile
func2str
function
functions
functiontests
funm
fwrite
fwrite (serial)
fzero
matlab.unittest.FunctionTestCase
gallery
gamma
gammainc
gammaincinv
gammaln
gather
gca
gcbf
gcbo
gcd
gcf
gcmr
gco
ge, >=
genpath
genvarname
get
get
get
get (COM)
get (RandStream)
get (serial)
get (tscollection)
getabstime (tscollection)
getappdata

getaudiodata
GetCharArray
getenv
getfield
getframe
GetFullMatrix
getnext
getpixelposition
getpoints
getpref
getsampleusingtime (tscollection)
getTag
getTagNames
gettimeseriesnames
gettsafteratevent
gettsafterevent
gettsatevent
gettsbeforeatevent
gettsbeforeevent
gettsbetweenevents
GetVariable
getVersion
GetWorkspaceData
ginput
global
gmres
gobjects
gplot
grabcode
gradient
addedge
addnode
adjacency
bctree
bfsearch
biconncomp
centrality
conncomp
degree
dfsearch

distances
findedge
findnode
incidence
isomorphism
isisomorphic
laplacian
maxflow
minspantree
nearest
neighbors
numedges
numnodes
highlight
labeledge
labelnode
layout
plot (graph)
rmedge
rmnode
reordernodes
shortestpath
shortestpathtree
subgraph
graph
graph
GraphPlot
GraphPlot Properties
gray
matlab.graphics.Graphics
matlab.graphics.GraphicsPlaceholder
graymon
grid
griddata
griddatan
griddedInterpolant
groot
gsvd
gt, >
gtext

guidata
guide
guihandles
gunzip
gzip
h5create
h5disp
h5info
h5read
h5readatt
h5write
h5writeatt
H5.close
H5.garbage_collect
H5.get_libversion
H5.open
H5.set_free_list_limits
H5A.close
H5A.create
H5A.delete
H5A.get_info
H5A.get_name
H5A.get_space
H5A.get_type
H5A.iterate
H5A.open
H5A.open_by_idx
H5A.open_by_name
H5A.read
H5A.write
H5D.close
H5D.create
H5D.get_access_plist
H5D.get_create_plist
H5D.get_offset
H5D.get_space
H5D.get_space_status
H5D.get_storage_size
H5D.get_type
H5D.open

H5D.read
H5D.set_extent
H5D.vlen_get_buf_size
H5D.write
H5DS.attach_scale
H5DS.detach_scale
H5DS.get_label
H5DS.get_num_scales
H5DS.get_scale_name
H5DS.is_scale
H5DS.iterate_scales
H5DS.set_label
H5DS.set_scale
H5E.clear
H5E.get_major
H5E.get_minor
H5E.walk
H5F.close
H5F.create
H5F.flush
H5F.get_access_plist
H5F.get_create_plist
H5F.get_filesize
H5F.get_freespace
H5F.get_info
H5F.get_mdc_config
H5F.get_mdc_hit_rate
H5F.get_mdc_size
H5F.get_name
H5F.get_obj_count
H5F.get_obj_ids
H5F.is_hdf5
H5F.mount
H5F.open
H5F.reopen
H5F.set_mdc_config
H5F.unmount
H5G.close
H5G.create
H5G.get_info

H5G.open
H5I.dec_ref
H5I.get_file_id
H5I.get_name
H5I.get_ref
H5I.get_type
H5I.inc_ref
H5I.is_valid
H5L.copy
H5L.create_external
H5L.create_hard
H5L.create_soft
H5L.delete
H5L.exists
H5L.get_info
H5L.get_name_by_idx
H5L.get_val
H5L.iterate
H5L.iterate_by_name
H5L.move
H5L.visit
H5L.visit_by_name
H5ML.compare_values
H5ML.get_constant_names
H5ML.get_constant_value
H5ML.get_function_names
H5ML.get_mem_datatype
H5ML.hoffset
H5ML.sizeof
H5O.close
H5O.copy
H5O.get_comment
H5O.get_comment_by_name
H5O.get_info
H5O.link
H5O.open
H5O.open_by_idx
H5O.set_comment
H5O.set_comment_by_name
H5O.visit

H5O.visit_by_name
H5P.close
H5P.copy
H5P.create
H5P.get_class
H5P.close_class
H5P.equal
H5P.exist
H5P.get
H5P.get_class_name
H5P.get_class_parent
H5P.get_nprops
H5P.get_size
H5P.isa_class
H5P.iterate
H5P.set
H5P.get_btree_ratios
H5P.get_chunk_cache
H5P.get_edc_check
H5P.get_hyper_vector_size
H5P.set_btree_ratios
H5P.set_chunk_cache
H5P.set_edc_check
H5P.set_hyper_vector_size
H5P.all_filters_avail
H5P.fill_value_defined
H5P.get_alloc_time
H5P.get_chunk
H5P.get_external
H5P.get_external_count
H5P.get_fill_time
H5P.get_fill_value
H5P.get_filter
H5P.get_filter_by_id
H5P.get_layout
H5P.get_nfilters
H5P.modify_filter
H5P.remove_filter
H5P.set_alloc_time
H5P.set_chunk

H5P.set_deflate
H5P.set_external
H5P.set_fill_time
H5P.set_fill_value
H5P.set_filter
H5P.set_fletcher32
H5P.set_layout
H5P.set_nbit
H5P.set_scaleoffset
H5P.set_shuffle
H5P.get_alignment
H5P.get_driver
H5P.get_family_offset
H5P.get_fapl_core
H5P.get_fapl_family
H5P.get_fapl_multi
H5P.get_fclose_degree
H5P.get_libver_bounds
H5P.get_gc_references
H5P.get_mdc_config
H5P.get_meta_block_size
H5P.get_multi_type
H5P.get_sieve_buf_size
H5P.get_small_data_block_size
H5P.set_alignment
H5P.set_family_offset
H5P.set_fapl_core
H5P.set_fapl_family
H5P.set_fapl_log
H5P.set_fapl_multi
H5P.set_fapl_sec2
H5P.set_fapl_split
H5P.set_fapl_stdio
H5P.set_fclose_degree
H5P.set_gc_references
H5P.set_libver_bounds
H5P.set_mdc_config
H5P.set_meta_block_size
H5P.set_multi_type
H5P.set_sieve_buf_size

H5P.set_small_data_block_size
H5P.get_istore_k
H5P.get_sizes
H5P.get_sym_k
H5P.get_userblock
H5P.get_version
H5P.set_istore_k
H5P.set_sizes
H5P.set_sym_k
H5P.set_userblock
H5P.get_attr_creation_order
H5P.get_attr_phase_change
H5P.get_copy_object
H5P.set_attr_creation_order
H5P.set_attr_phase_change
H5P.set_copy_object
H5P.get_create_intermediate_group
H5P.get_link_creation_order
H5P.get_link_phase_change
H5P.set_create_intermediate_group
H5P.set_link_creation_order
H5P.set_link_phase_change
H5P.get_char_encoding
H5P.set_char_encoding
H5R.create
H5R.dereference
H5R.get_name
H5R.get_obj_type
H5R.get_region
H5S.copy
H5S.create
H5S.close
H5S.create_simple
H5S.extent_copy
H5S.get_select_bounds
H5S.get_select_elem_npoints
H5S.get_select_elem_pointlist
H5S.get_select_hyper_blocklist
H5S.get_select_hyper_nblocks
H5S.get_select_npoints

H5S.get_select_type
H5S.get_simple_extent_dims
H5S.get_simple_extent_ndims
H5S.get_simple_extent_npoints
H5S.get_simple_extent_type
H5S.is_simple
H5S.offset_simple
H5S.select_all
H5S.select_elements
H5S.select_hyperslab
H5S.select_none
H5S.select_valid
H5S.set_extent_none
H5S.set_extent_simple
H5T.close
H5T.commit
H5T.committed
H5T.copy
H5T.create
H5T.detect_class
H5T.equal
H5T.get_class
H5T.get_create_plist
H5T.get_native_type
H5T.get_size
H5T.get_super
H5T.lock
H5T.open
H5T.array_create
H5T.get_array_dims
H5T.get_array_ndims
H5T.get_cset
H5T.get_ebias
H5T.get_fields
H5T.get_inpad
H5T.get_norm
H5T.get_offset
H5T.get_order
H5T.get_pad
H5T.get_precision

H5T.get_sign
H5T.get_strpad
H5T.set_cset
H5T.set_ebias
H5T.set_fields
H5T.set_inpad
H5T.set_norm
H5T.set_offset
H5T.set_order
H5T.set_pad
H5T.set_precision
H5T.set_sign
H5T.set_size
H5T.set_strpad
H5T.get_member_class
H5T.get_member_index
H5T.get_member_name
H5T.get_member_offset
H5T.get_member_type
H5T.get_nmembers
H5T.insert
H5T.pack
H5T.enum_create
H5T.enum_insert
H5T.enum_nameof
H5T.enum_valueof
H5T.get_member_value
H5T.get_tag
H5T.set_tag
H5T.is_variable_str
H5T.vlen_create
H5Z.filter_avail
H5Z.get_filter_info
hadamard
handle
addlistener
delete
findobj
findprop
isvalid

notify
relationaloperators
hankel
hasnext
hdf5info
hdf5read
hdf5write
hdfan
hdfdf24
hdfdfr8
hdfh
hdfhd
hdfhe
hdfhx
hdfinfo
hdfml
hdfpt
hdfread
hdftool
hdfv
hdfvf
hdfvh
hdfvs
heatmap
HeatmapChart Properties
head
height
help
helpbrowser
helpdesk
helpdlg
helpwin
hess
matlab.mixin.Heterogeneous
cat
getDefaultScalarElement
horzcat
vertcat
hex2dec
hex2num

hgexport
hggroup
Group Properties
hgload
hgsave
hgsetget
hgtransform
Transform Properties
hidden
hilb
hist
histc
histcounts
histcounts2
histogram
histogram
Histogram Properties
histogram2
histogram2
Histogram2 Properties
hms
hold
home
horzcat
horzcat (tscollection)
hour
hours
hot
hsv
hsv2rgb
matlab.net.http
matlab.net.http.AuthenticationScheme
matlab.net.http.AuthInfo
getParameter
removeParameter
setParameter
matlab.net.http.Cookie
matlab.net.http.CookieInfo
collectFromLog
matlab.net.http.Credentials

matlab.net.http.Disposition
matlab.net.http.HeaderField
char
convert
convertLike
displaySubclasses
eq
isequal
string
parse
matlab.net.http.HTTPException
matlab.net.http.HTTPOptions
matlab.net.http.LogRecord
show
matlab.net.http.MediaType
getParameter
setParameter
matlab.net.http.Message
char
string
addFields
changeFields
getFields
removeFields
show
matlab.net.http.MessageBody
char
show
string
matlab.net.http.MessageType
parula
matlab.net.http.ProgressMonitor
done
matlab.net.http.ProtocolVersion
matlab.net.http.RequestLine
matlab.net.http.RequestMessage
complete
send
matlab.net.http.RequestMethod
matlab.net.http.ResponseMessage

complete
matlab.net.http.StartLine
matlab.net.http.StatusClass
getReasonPhrase
matlab.net.http.StatusCode
fromValue
getClass
getReasonPhrase
matlab.net.http.StatusLine
matlab.net.http.field
matlab.net.http.field.AcceptField
convert
matlab.net.http.field.AuthenticateField
matlab.net.http.field.AuthenticationInfoField
matlab.net.http.field.AuthorizationField
matlab.net.http.field.ContentLengthField
matlab.net.http.field.ContentLocationField
matlab.net.http.field.ContentTypeField
matlab.net.http.field.CookieField
matlab.net.http.field.DateField
matlab.net.http.field.GenericField
matlab.net.http.field.HTTPDateField
matlab.net.http.field.IntegerField
matlab.net.http.field.LocationField
matlab.net.http.field.MediaRangeField
matlab.net.http.field.SetCookieField
convert
matlab.net.http.field.URIReferenceField
matlab.net.ArrayFormat
matlab.net.QueryParameter
char
string
matlab.net.URI
matlab.net.base64decode
matlab.net.base64encode
hypot
i
ichol
idivide
if, elseif, else

ifft
ifft2
ifftn
ifftshift
ilu
im2double
im2frame
im2java
imag
image
Image Properties
imageDatastore
imagesc
imapprox
imfinfo
imformats
ImplicitFunctionLine Properties
ImplicitFunctionSurface Properties
import
importdata
DelimitedTextImportOptions
FixedWidthImportOptions
getvaropts
setvaropts
setvartype
SpreadsheetImportOptions
Import Tool
imread
imshow
imwrite
incenters
inOutStatus
ind2rgb
ind2sub
Inf
info
inline
inmem
innerjoin
inpolygon

input
inputdlg
inputname
inputParser
insertAfter
insertBefore
inspect
instrcallback
instrfind
instrfindall
int2str
int8
int16
int32
int64
integral
integral2
integral3
interfaces
interp1
interp1q
interp2
interp3
interpft
interpn
interpstreamspeed
intersect
intmax
intmin
inv
invhilb
invoke
ipermute
is*
isa
isappdata
isaUnderlying
isbanded
isbetween
iscalendarduration

iscategorical
iscategory
iscell
iscellstr
ischar
iscolumn
iscom
isdatetime
isdiag
isdir
isdst
isduration
isEdge
isempty
isempty (tscollection)
isequal
isenum
isequaln
isequalwithequalnans
isevent
isfield
isfinite
isfloat
isgraphics
ishandle
ishermitian
ishghandle
ishold
isinf
isinteger
isinterface
isjava
isKey
iskeyword
isletter
islogical
ismac
ismatrix
ismember
ismembertol

ismethod
ismethod (COM)
cool
ismissing
isnan
isnat
isnumeric
isobject
isocaps
isocolors
isonormals
isordinal
isosurface
isoutlier
ispc
ispref
isprime
isprop
isprop (COM)
isprotected
isreal
isregular
isrow
isscalar
issorted
issortedrows
isspace
issparse
isstr
isstring
isstrprop
isstruct
isstudent
issymmetric
isTiled
istable
istall
istimetable
istril
istriu

isundefined
isunix
isvalid (serial)
isvarname
isvector
isweekend
j
jet
jsondecode
jsonencode
javaaddpath
javaArray
javachk
javaclasspath
matlab.exception.JavaException
javaMethod
javaMethodEDT
javaObject
javaObjectEDT
javarmpath
join
juliandate
keyboard
keys
kron
KeyValueStore
lag
lastDirectory
Chart Line Properties
FunctionLine Properties
ParameterizedFunctionLine Properties
FunctionContour Properties
FunctionSurface Properties
ParameterizedFunctionSurface Properties
lasterr
lasterror
lastwarn
lcm
ldl
ldivide, .\

le, <=
legend
Legend Properties
Legend Text Properties
legendre
length
length
length (serial)
length (tscollection)
libfunctions
libfunctionsview
libisloaded
libpointer
lib.pointer
disp
isNull
plus
reshape
setdatatype
libstruct
license
light
Light Properties
lightangle
lighting
lin2mu
line
lines
LineSpec (Line Specification)
linkaxes
linkdata
linkprop
linsolve
linspace
RandStream.list
listdlg
listfonts
load
load (COM)
load (serial)

loadlibrary
loadobj
localfunctions
log
log10
log1p
log2
logical
loglog
logm
logspace
lookfor
lower
ls
lscov
lsqnonneg
lsqr
lt, <
lu
Primitive Line Properties
magic
makehgtform
mapreduce
mapreducer
containers.Map
mat2cell
mat2str
material
matfile
matlab.addons.toolbox.installedToolboxes
matlab.addons.toolbox.installToolbox
matlab.addons.toolbox.packageToolbox
matlab.addons.toolbox.toolboxVersion
matlab.addons.toolbox.uninstallToolbox
matlab.codetools.requiredFilesAndProducts
matlab.engine.engineName
matlab.engine.isEngineShared
matlab.engine.shareEngine
matlab.io.MatFile
matlab.io.fits.closeFile

matlab.io.fits.createFile
matlab.io.fits.deleteFile
matlab.io.fits.fileName
matlab.io.fits.fileMode
matlab.io.fits.openFile
matlab.io.fits.createImg
matlab.io.fits.getImgSize
matlab.io.fits.getImgType
matlab.io.fits.insertImg
matlab.io.fits.readImg
matlab.io.fits.setBscale
matlab.io.fits.writeImg
matlab.io.fits.deleteKey
matlab.io.fits.deleteRecord
matlab.io.fits.getHdrSpace
matlab.io.fits.readCard
matlab.io.fits.readKey
matlab.io.fits.readKeyCmplx
matlab.io.fits.readKeyDbl
matlab.io.fits.readKeyLongLong
matlab.io.fits.readKeyLongStr
matlab.io.fits.readKeyUnit
matlab.io.fits.readRecord
matlab.io.fits.writeComment
matlab.io.fits.writeDate
matlab.io.fits.writeKey
matlab.io.fits.writeKeyUnit
matlab.io.fits.writeHistory
matlab.io.fits.copyHDU
matlab.io.fits.deleteHDU
matlab.io.fits.getHDUnum
matlab.io.fits.getHDUtype
matlab.io.fits.getNumHDUs
matlab.io.fits.movAbsHDU
matlab.io.fits.movNamHDU
matlab.io.fits.movRelHDU
matlab.io.fits.writeChecksum
matlab.io.fits.imgCompress
matlab.io.fits.isCompressedImg
matlab.io.fits.setCompressionType

matlab.io.fits.setHCompScale
matlab.io.fits.setHCompSmooth
matlab.io.fits.setTileDim
matlab.io.fits.createTbl
matlab.io.fits.deleteCol
matlab.io.fits.deleteRows
matlab.io.fits.insertRows
matlab.io.fits.getAColParms
matlab.io.fits.getBColParms
matlab.io.fits.getColName
matlab.io.fits.getColType
matlab.io.fits.getEqColType
matlab.io.fits.getNumCols
matlab.io.fits.getNumRows
matlab.io.fits.insertCol
matlab.io.fits.insertATbl
matlab.io.fits.insertBTbl
matlab.io.fits.readATblHdr
matlab.io.fits.readBTblHdr
matlab.io.fits.readCol
matlab.io.fits.setTscale
matlab.io.fits.writeCol
matlab.io.fits.getConstantValue
matlab.io.fits.getVersion
matlab.io.fits.getOpenFiles
matlab.io.hdf4.sd
matlab.io.hdf4.sd.attrInfo
matlab.io.hdf4.sd.close
matlab.io.hdf4.sd.create
matlab.io.hdf4.sd.dimInfo
matlab.io.hdf4.sd.endAccess
matlab.io.hdf4.sd.fileInfo
matlab.io.hdf4.sd.findAttr
matlab.io.hdf4.sd.getCal
matlab.io.hdf4.sd.getChunkInfo
matlab.io.hdf4.sd.getCompInfo
matlab.io.hdf4.sd.getDataStrs
matlab.io.hdf4.sd.getDimID
matlab.io.hdf4.sd.getDimScale
matlab.io.hdf4.sd.getDimStrs

matlab.io.hdf4.sd.getFilename
matlab.io.hdf4.sd.getFillValue
matlab.io.hdf4.sd.getInfo
matlab.io.hdf4.sd.getRange
matlab.io.hdf4.sd.idToRef
matlab.io.hdf4.sd.idType
matlab.io.hdf4.sd.isCoordVar
matlab.io.hdf4.sd.isRecord
matlab.io.hdf4.sd.nameToIndex
matlab.io.hdf4.sd.nameToIndices
matlab.io.hdf4.sd.readAttr
matlab.io.hdf4.sd.readChunk
matlab.io.hdf4.sd.readData
matlab.io.hdf4.sd.refToIndex
matlab.io.hdf4.sd.select
matlab.io.hdf4.sd.setAttr
matlab.io.hdf4.sd.setCal
matlab.io.hdf4.sd.setChunk
matlab.io.hdf4.sd.setCompress
matlab.io.hdf4.sd.setDataStrs
matlab.io.hdf4.sd.setDimName
matlab.io.hdf4.sd.setDimScale
matlab.io.hdf4.sd.setDimStrs
matlab.io.hdf4.sd.setExternalFile
matlab.io.hdf4.sd.setFillMode
matlab.io.hdf4.sd.setFillValue
matlab.io.hdf4.sd.setNBitDataSet
matlab.io.hdf4.sd.setRange
matlab.io.hdf4.sd.start
matlab.io.hdf4.sd.writeChunk
matlab.io.hdf4.sd.writeData
matlab.io.hdfeos.gd
matlab.io.hdfeos.gd.attach
matlab.io.hdfeos.gd.close
matlab.io.hdfeos.gd.compInfo
matlab.io.hdfeos.gd.create
matlab.io.hdfeos.gd.defBoxRegion
matlab.io.hdfeos.gd.defComp
matlab.io.hdfeos.gd.defDim
matlab.io.hdfeos.gd.defField

matlab.io.hdfeos.gd.defOrigin
matlab.io.hdfeos.gd.defPixReg
matlab.io.hdfeos.gd.defProj
matlab.io.hdfeos.gd.defTile
matlab.io.hdfeos.gd.defVrtRegion
matlab.io.hdfeos.gd.detach
matlab.io.hdfeos.gd.dimInfo
matlab.io.hdfeos.gd.extractRegion
matlab.io.hdfeos.gd.fieldInfo
matlab.io.hdfeos.gd.getFillValue
matlab.io.hdfeos.gd.getPixels
matlab.io.hdfeos.gd.getPixValues
matlab.io.hdfeos.gd.gridInfo
matlab.io.hdfeos.gd.ij2ll
matlab.io.hdfeos.gd.inqAttrs
matlab.io.hdfeos.gd.inqDims
matlab.io.hdfeos.gd.inqFields
matlab.io.hdfeos.gd.inqGrid
matlab.io.hdfeos.gd.interpolate
matlab.io.hdfeos.gd.ll2ij
matlab.io.hdfeos.gd.nEntries
matlab.io.hdfeos.gd.open
matlab.io.hdfeos.gd.originInfo
matlab.io.hdfeos.gd.pixRegInfo
matlab.io.hdfeos.gd.projInfo
matlab.io.hdfeos.gd.readAttr
matlab.io.hdfeos.gd.readBlkSomOffset
matlab.io.hdfeos.gd.readField
matlab.io.hdfeos.gd.readTile
matlab.io.hdfeos.gd.regionInfo
matlab.io.hdfeos.gd.setFillValue
matlab.io.hdfeos.gd.setTileComp
matlab.io.hdfeos.gd.sphereCodeToName
matlab.io.hdfeos.gd.sphereNameToCode
matlab.io.hdfeos.gd.tileInfo
matlab.io.hdfeos.gd.writeAttr
matlab.io.hdfeos.gd.writeBlkSomOffset
matlab.io.hdfeos.gd.writeField
matlab.io.hdfeos.gd.writeTile
matlab.io.hdfeos.sw

matlab.io.hdfeos.sw.attach
matlab.io.hdfeos.sw.close
matlab.io.hdfeos.sw.compInfo
matlab.io.hdfeos.sw.create
matlab.io.hdfeos.sw.defBoxRegion
matlab.io.hdfeos.sw.defComp
matlab.io.hdfeos.sw.defDataField
matlab.io.hdfeos.sw.defDim
matlab.io.hdfeos.sw.defDimMap
matlab.io.hdfeos.sw.defGeoField
matlab.io.hdfeos.sw.defTimePeriod
matlab.io.hdfeos.sw.defVrtRegion
matlab.io.hdfeos.sw.detach
matlab.io.hdfeos.sw.dimInfo
matlab.io.hdfeos.sw.extractPeriod
matlab.io.hdfeos.sw.extractRegion
matlab.io.hdfeos.sw.fieldInfo
matlab.io.hdfeos.sw.geoMapInfo
matlab.io.hdfeos.sw.getFillValue
matlab.io.hdfeos.sw.idxMapInfo
matlab.io.hdfeos.sw.inqAttrs
matlab.io.hdfeos.sw.inqDataFields
matlab.io.hdfeos.sw.inqDims
matlab.io.hdfeos.sw.inqGeoFields
matlab.io.hdfeos.sw.inqIdxMaps
matlab.io.hdfeos.sw.inqMaps
matlab.io.hdfeos.sw.inqSwath
matlab.io.hdfeos.sw.mapInfo
matlab.io.hdfeos.sw.nEntries
matlab.io.hdfeos.sw.open
matlab.io.hdfeos.sw.periodInfo
matlab.io.hdfeos.sw.readAttr
matlab.io.hdfeos.sw.readField
matlab.io.hdfeos.sw.regionInfo
matlab.io.hdfeos.sw.setFillValue
matlab.io.hdfeos.sw.writeAttr
matlab.io.hdfeos.sw.writeField
matlab.io.saveVariablesToScript
matlab.lang.makeUniqueStrings
matlab.lang.makeValidName

matlab.mock.actions.AssignOutputs
repeat
then
matlab.mock.actions.ReturnStoredValue
repeat
then
matlab.mock.actions.StoreValue
repeat
then
matlab.mock.actions.ThrowException
repeat
then
matlab.mock.AnyArguments
matlab.mock.constraints.WasAccessed
matlab.mock.constraints.WasCalled
matlab.mock.constraints.WasSet
matlab.mock.MethodCallBehavior
when
withAnyInputs
withExactInputs
withNargout
matlab.mock.PropertyBehavior
get
setToValue
set
matlab.mock.PropertyGetBehavior
when
matlab.mock.PropertySetBehavior
when
matlab.mock.TestCase
assertAccessed
assertCalled
assertSet
assertNotAccessed
assertNotCalled
assertNotSet
assignOutputsWhen
assumeAccessed
assumeCalled
assumeSet

assumeNotAccessed
assumeNotCalled
assumeNotSet
createMock
fatalAssertAccessed
fatalAssertCalled
fatalAssertSet
fatalAssertNotAccessed
fatalAssertNotCalled
fatalAssertNotSet
forInteractiveUse
returnStoredValueWhen
storeValueWhen
throwExceptionWhen
verifyAccessed
verifyCalled
verifySet
verifyNotAccessed
verifyNotCalled
verifyNotSet
matlabrc
matlabroot
matlabshared.supportpkg.checkForUpdate
matlabshared.supportpkg.getInstalled
matlabshared.supportpkg.getSupportPackageRoot
matlabshared.supportpkg.setSupportPackageRoot
matlab (Linux)
matlab (Mac)
matlab (Windows)
max
MaximizeCommandWindow
maxNumCompThreads
mean
matlab.unittest.measurement.MeasurementResult
samplefun
sampleSummary
median
memmapfile
memoize
MemoizedFunction

memory
menu
mergecats
mesh
meshc
meshz
meshgrid
meta.class
meta.class.fromName
meta.DynamicProperty
meta.EnumeratedValue
meta.event
meta.MetaData
meta.method
meta.package
meta.abstractDetails
meta.package.fromName
meta.package.getAllPackages
meta.property
metaclass
methods
methodsview
mex
mex.getCompilerConfigurations
MException
addCause
getReport
last
rethrow
throw
throwAsCaller
mexext
mfilename
mget
milliseconds
min
MinimizeCommandWindow
minres
minus, -
minute

minutes
mislocked
missing
mkdir
mkdir
mkpp
mldivide, \
mrdivide, /
mlint
mlintrpt
mlock
mmfileinfo
mod
mode
month
more
morebins
move
movefile
movegui
movie
movmad
movmax
movmean
movmedian
movmin
movprod
movstd
movsum
movvar
mpower, ^
mput
msgbox
mtimes, *
mu2lin
multibandread
multibandwrite
munlock
mustBePositive
mustBeNonpositive

mustBeFinite
mustBeNonNan
mustBeNonnegative
mustBeGreaterThan
mustBeGreaterThanOrEqual
mustBeLessThan
mustBeLessThanOrEqual
mustBeNegative
mustBeNonempty
mustBeNonsparse
mustBeNonzero
mustBeNumeric
mustBeNumericOrLogical
mustBeReal
mustBeInteger
mustBeMember
namelengthmax
NaN
nargchk
nargin
narginchk
nargout
nargoutchk
NaT
native2unicode
nchoosek
ndgrid
ndims
ne, ~=
nearestNeighbor
neighbors
NET
NET.addAssembly
NET.Assembly
NET.convertArray
NET.createArray
NET.createGeneric
NET.disableAutoRelease
NET.enableAutoRelease
NET.GenericClass

NET.invokeGenericMethod
NET.isNETSupported
NET.NetException
NET.setStaticProperty
nccreate
ncdisp
ncinfo
ncread
ncreadatt
ncwrite
ncwriteatt
ncwriteschema
netcdf
netcdf.abort
netcdf.close
netcdf.copyAtt
netcdf.create
netcdf.defDim
netcdf.defGrp
netcdf.defVar
netcdf.defVarChunking
netcdf.defVarDeflate
netcdf.defVarFill
netcdf.defVarFletcher32
netcdf.delAtt
netcdf.endDef
netcdf.getAtt
netcdf.getChunkCache
netcdf.getConstant
netcdf.getConstantNames
netcdf.getVar
netcdf.inq
netcdf.inqDimIDs
netcdf.inqFormat
netcdf.inqGrpName
netcdf.inqGrpNameFull
netcdf.inqGrpParent
netcdf.inqGrps
netcdf.inqNcid
netcdf.inqUnlimDims

netcdf.inqVarIDs
netcdf.inqVarChunking
netcdf.inqVarDeflate
netcdf.inqVarFill
netcdf.inqVarFletcher32
netcdf.inqAtt
netcdf.inqAttID
netcdf.inqAttName
netcdf.inqDim
netcdf.inqDimID
netcdf.inqLibVers
netcdf.inqVar
netcdf.inqVarID
netcdf.open
netcdf.putAtt
netcdf.putVar
netcdf.reDef
netcdf.renameAtt
netcdf.renameDim
netcdf.renameVar
netcdf.setChunkCache
netcdf.setDefaultFormat
netcdf.setFill
netcdf.sync
newline
newplot
nextDirectory
nextpow2
nnz
noanimate
nonzeros
norm
normest
not, ~
notebook
now
nthroot
null
numArgumentsFromSubscript
num2cell

num2hex
num2ruler
num2str
numberOfStrips
numberOfTiles
numel
NumericRuler Properties
nzmax
ode15i
ode15s
ode23
ode23s
ode23t
ode23tb
ode45
ode113
odeget
odeset
odextend
onCleanup
ones
matlab.lang.OnOffSwitchState
open
openfig
opengl
openvar
optimget
optimset
or, |
ordeig
orderfields
ordqz
ordschur
orient
orth
outerjoin
pack
pad
padecoef
pagesetupdlg

pan
matlab.unittest.parameters
matlab.unittest.parameters.EmptyParameter
matlab.unittest.parameters.ClassSetupParameter
matlab.unittest.parameters.TestParameter
matlab.unittest.parameters.MethodSetupParameter
pareto
parfor
parse
parseSoapResponse
pascal
patch
Patch Properties
path
path2rc
pathsep
pathtool
pause
pbaspect
pcg
pchip
pcode
pcolor
pdepe
pdeval
peaks
matlab.perftest.FixedTimeExperiment
matlab.perftest.FrequentistTimeExperiment
matlab.perftest.TestCase
startMeasuring
stopMeasuring
matlab.perftest.TimeExperiment
limitingSamplingError
run
withFixedSampleSize
perl
perms
permute
persistent
pi

pie
pie3
pink
pinv
planerot
play
play
playblocking
plot
plot3
plotbrowser
plotedit
plotmatrix
plottools
plotyy
matlab.unittest.plugins
matlab.unittest.plugins.CodeCoveragePlugin
forFolder
forPackage
matlab.unittest.plugins.DiagnosticsRecordingPlugin
selectFailed
selectIncomplete
selectLogged
selectPassed
matlab.unittest.plugins.DiagnosticsValidationPlugin
matlab.unittest.plugins.FailureDiagnosticsPlugin
matlab.unittest.plugins.FailOnWarningsPlugin
matlab.unittest.plugins.LoggingPlugin
withVerbosity
matlab.unittest.plugins.OutputStream
print
matlab.unittest.plugins.QualifyingPlugin
assertUsing
assumeUsing
fatalAssertUsing
verifyUsing
matlab.unittest.plugins.StopOnFailuresPlugin
matlab.unittest.plugins.TAPPlugin
producingOriginalFormat
producingVersion13

matlab.unittest.plugins.ToFile
matlab.unittest.plugins.ToStandardOutput
matlab.unittest.plugins.testreport
matlab.unittest.plugins.testreport.DOCXTestReportPlugin
matlab.unittest.plugins.testreport.PDFTestReportPlugin
matlab.unittest.plugins.TestReportPlugin
producingDOCX
producingPDF
matlab.unittest.plugins.TestRunnerPlugin
createSharedTestFixture
createTestClassInstance
createTestMethodInstance
reportFinalizedResult
runTest
runTestClass
runTestSuite
runTestMethod
setupSharedTestFixture
setupTestClass
setupTestMethod
teardownSharedTestFixture
teardownTestClass
teardownTestMethod
matlab.unittest.plugins.TestRunProgressPlugin
matlab.unittest.plugins.XMLPlugin
matlab.unittest.plugins.diagnosticrecord
matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord
matlab.unittest.plugins.diagnosticrecord.ExceptionDiagnosticRecord
matlab.unittest.plugins.diagnosticrecord.LoggedDiagnosticRecord
matlab.unittest.plugins.diagnosticrecord.QualificationDiagnosticRecord
matlab.unittest.plugins.plugindata
matlab.unittest.plugins.plugindata.FinalizedResultPluginData
matlab.unittest.plugins.plugindata.ImplicitFixturePluginData
matlab.unittest.plugins.plugindata.PluginData
matlab.unittest.plugins.plugindata.QualificationContext
matlab.unittest.plugins.plugindata.SharedTestFixturePluginData
matlab.unittest.plugins.plugindata.TestContentCreationPluginData
matlab.unittest.plugins.plugindata.TestSuiteRunPluginData
plus, +
pointLocation

pol2cart
polar
polaraxes
PolarAxes Properties
polarhistogram
polarplot
polarscatter
poly
polyarea
polyder
polyeig
polyfit
polyint
polyval
polyvalm
posixtime
pow2
power, .^
ppval
prefdir
preferences
primes
print
printopt
printdlg
printpreview
prism
prod
profile
profsave
propedit
propedit (COM)
properties
propertyeditor
matlab.mixin.util.PropertyGroup
psi
publish
PutCharArray
PutFullMatrix
PutWorkspaceData

pwd
pyargs
matlab.exception.PyException
pyversion
qmr
qr
qrdelete
qrinsert
qrupdate
quad
quad2d
quadgk
quadl
quadv
matlab.unittest.qualifications
matlab.unittest.qualifications.Assertable
assertClass
assertEmpty
assertEqual
assertError
assertFail
assertFalse
assertGreaterThan
assertGreaterThanOrEqual
assertInstanceOf
assertLength
assertLessThan
assertLessThanOrEqual
assertMatches
assertNotEmpty
assertNotEqual
assertNotSameHandle
assertNumElements
assertReturnsTrue
assertSameHandle
assertSize
assertSubstring
assertThat
assertTrue
assertWarning

assertWarningFree
matlab.unittest.qualifications.AssertionFailedException
matlab.unittest.qualifications.Assumable
assumeClass
assumeEmpty
assumeEqual
assumeError
assumeFail
assumeFalse
assumeGreaterThan
assumeGreaterThanOrEqual
assumeInstanceOf
assumeLength
assumeLessThan
assumeLessThanOrEqual
assumeMatches
assumeNotEmpty
assumeNotEqual
assumeNotSameHandle
assumeNumElements
assumeReturnsTrue
assumeSameHandle
assumeSize
assumeSubstring
assumeThat
assumeTrue
assumeWarning
assumeWarningFree
matlab.unittest.qualifications.AssumptionFailedException
matlab.unittest.qualifications.ExceptionEventData
matlab.unittest.qualifications.FatalAssertable
fatalAssertClass
fatalAssertEmpty
fatalAssertEqual
fatalAssertError
fatalAssertFail
fatalAssertFalse
fatalAssertGreaterThan
fatalAssertGreaterThanOrEqual
fatalAssertInstanceOf

fatalAssertLength
fatalAssertLessThan
fatalAssertLessThanOrEqual
fatalAssertMatches
fatalAssertNotEmpty
fatalAssertNotEqual
fatalAssertNotSameHandle
fatalAssertNumElements
fatalAssertReturnsTrue
fatalAssertSameHandle
fatalAssertSize
fatalAssertSubstring
fatalAssertThat
fatalAssertTrue
fatalAssertWarning
fatalAssertWarningFree
matlab.unittest.qualifications.FatalAssertionFailedException
matlab.unittest.qualifications.QualificationEventData
matlab.unittest.qualifications.Verifiable
verifyClass
verifyEmpty
verifyEqual
verifyError
verifyFail
verifyFalse
verifyGreaterThan
verifyGreaterThanOrEqual
verifyInstanceOf
verifyLength
verifyLessThan
verifyLessThanOrEqual
verifyMatches
verifyNotEmpty
verifyNotEqual
verifyNotSameHandle
verifyNumElements
verifyReturnsTrue
verifySameHandle
verifySize
verifySubstring

verifyThat
verifyTrue
verifyWarning
verifyWarningFree
quarter
questdlg
quit
Quit (COM)
quiver
quiver3
Quiver Properties
qz
rad2deg
rand
rand (RandStream)
randi
randi (RandStream)
randn
randn (RandStream)
randperm
randperm (RandStream)
RandStream
RandStream constructor
RandStream.getGlobalStream
RandStream.setGlobalStream
rank
rat
rats
rbbox
rcond
rdivide, ./
read
read
readasync
readEncodedStrip
readEncodedTile
readRGBAImage
readRGBAStrip
readRGBATile
Remove

RemoveAll
timeseries
addsample
append
delsample
detrend
filter
get
getabstime
getdatasamples
getdatasamplesize
getinterpmethod
getqualitydesc
getsamples
getsampleusingtime
idealfilter
iqr
max
mean
median
min
plot
resample
set
setabstime
setinterpmethod
setuniformtime
synchronize
std
sum
var
triangulation
barycentricToCartesian
cartesianToBarycentric
circumcenter
edgeAttachments
edges
faceNormal
featureEdges
freeBoundary

incenter
isConnected
nearestNeighbor
neighbors
pointLocation
size
vertexAttachments
vertexNormal
readtable
real
reallog
realmax
realmin
realpow
realsqrt
record
record
recordblocking
rectangle
Rectangle Properties
rectint
recycle
reducepatch
reducevolume
refresh
refreshdata
regexp
regexpi
regexprep
regexptranslate
registerevent
regmatlabserver
rehash
release
rem
remove
removecats
removets
renamecats
reordercats

rename
repelem
replace
replaceBetween
repmat
resample (tscollection)
reset
reset (RandStream)
reshape
residue
restoredefaultpath
rethrow
retime
return
reverse
rewriteDirectory
rgb2gray
rgb2hsv
rgb2ind
rgbplot
ribbon
rlim
rmappdata
rmdir
rmdir
rmfield
rmmissing
rmpath
rmpref
rng
Root Properties
roots
rose
rosser
rot90
rotate
rotate3d
round
rowfun
rref

rsf2csf
rtickangle
rtickformat
rticklabels
rticks
ruler2num
run
runperf
runtests
Chart Surface Properties
Primitive Surface Properties
save
save (COM)
save (serial)
saveas
savefig
saveobj
savepath
scatter
scatter3
Scatter Properties
schur
scatteredInterpolant
matlab.unittest.Scope
sec
secd
sech
second
seconds
selectmoveresize
matlab.unittest.selectors
matlab.unittest.selectors.HasParameter
matlab.unittest.selectors.HasSharedTestFixture
matlab.unittest.selectors.HasBaseFolder
matlab.unittest.selectors.HasName
matlab.unittest.selectors.HasProcedureName
matlab.unittest.selectors.HasTag
semilogx
semilogy
sendmail

serial
serialbreak
seriallist
set
set
set
set (COM)
matlab.mixin.SetGet
matlab.mixin.SetGetExactNames
set
setdisp
get
getdisp
set (RandStream)
set (serial)
set (tscollection)
setabstime (tscollection)
setappdata
setcats
setdiff
setDirectory
setenv
setfield
setpixelposition
setpref
setstr
setSubDirectory
setTag
settimeseriesnames
setxor
shading
shg
shiftdim
showplottool
shrinkfaces
sign
sin
sind
single
sinh

size
size
size
size (serial)
size
size (tscollection)
slice
smooth3
smoothdata
snapnow
sort
sortrows
sound
soundsc
spalloc
sparse
spaugment
spconvert
spdiags
specular
speye
spfun
sph2cart
sphere
spinmap
spline
split
splitlines
splitapply
spones
spparms
sprand
sprandn
sprandsym
sprank
spreadsheetDatastore
SpreadsheetDatastore Properties
spring
sprintf
spy

sqrt
sqrtm
squeeze
ss2tf
sscanf
stack
stairs
Stair Properties
standardizeMissing
startsWith
startup
stats
std
stem
stem3
Stem Properties
stopasync
str2double
str2func
str2mat
str2num
strcat
strcmp
strcmpi
stream2
stream3
streamline
streamparticles
streamribbon
streamslice
streamtube
strfind
string
strings
strip
strjoin
strlength
strjust
strmatch
strncmp

strncmpi
strread
strrep
strsplit
strtok
strtrim
struct
struct2cell
struct2table
structfun
strvcat
sub2ind
subplot
subsasgn
subsindex
subspace
subsref
substruct
subvolume
sum
summary
summer
superclasses
support
Support Package Installer
supportPackageInstaller
surf
surfc
surf2patch
surface
surfl
surfnorm
svd
svds
swapbytes
switch, case, otherwise
sylvester
symamd
symbfact
symmlq

symrcm
symvar
synchronize
syntax
system
table
table2array
table2cell
table2struct
table2timetable
Table Properties
tabularTextDatastore
TabularTextDatastore Properties
tail
tall
tan
tand
tanh
tar
targetupdater
tcpclient
tempdir
tempname
testsuite
tetramesh
matlab.unittest.Test
matlab.unittest.TestCase
addTeardown
applyFixture
forInteractiveUse
getSharedTestFixtures
log
run
matlab.unittest.TestResult
matlab.unittest.TestRunner
addPlugin
run
runInParallel
withNoPlugins
withTextOutput

matlab.unittest.TestSuite
fromClass
fromFile
fromFolder
fromMethod
fromName
fromPackage
run
selectIf
texlabel
text
Text Properties
textread
textscan
textwrap
tfqmr
thetalim
thetatickformat
thetaticklabels
thetaticks
tic
timeit
toc
Tiff
time
timeofday
timer
delete
get
isvalid
set
start
startat
stop
timerfind
timerfindall
wait
times, .*
timerange
timetable

timetable2table
Timetable Properties
timezones
title
todatenum
toeplitz
toolboxdir
topkrows
trace
transpose, .'
trapz
treelayout
treeplot
tril
trimesh
triplequad
triplot
TriRep
TriRep
TriScatteredInterp
TriScatteredInterp
trisurf
triu
true
try, catch
tscollection
tsdata.event
tsearchn
type
typecast
tzoffset
uibuttongroup
Uibuttongroup Properties
uicontextmenu
Uicontextmenu Properties
uicontrol
Uicontrol Properties
uigetdir
uigetfile
uigetpref

uiimport
uimenu
Uimenu Properties
uint8
uint16
uint32
uint64
uiopen
uipanel
Uipanel Properties
uipushtool
Uipushtool Properties
uiputfile
uiresume
uisave
uisetcolor
uisetfont
uisetpref
uistack
uitab
Uitab Properties
uitabgroup
Uitabgroup Properties
uitable
Uitable Properties
Table (App Designer) Properties
uitoggletool
Uitoggletool Properties
uitoolbar
Uitoolbar Properties
uiwait
uminus, -
undocheckout
unicode2native
union
unique
uniquetol
matlab.unittest
unix
unloadlibrary

unmesh
unmkpp
unregisterallevents
unregisterevent
unstack
untar
unwrap
unzip
uplus, +
upper
urlread
urlwrite
usejava
userpath
ValueIterator
validateattributes
validatestring
values
vander
var
varargin
varargout
varfun
vartype
CategoricalVariableImportOptions
DatetimeVariableImportOptions
LogicalVariableImportOptions
NumericVariableImportOptions
TextVariableImportOptions
vectorize
ver
matlab.unittest.Verbosity
verctrl
verLessThan
version
vertcat
vertcat (tscollection)
vertexAttachments
VideoReader
VideoReader

VideoReader.getFileFormats
hasFrame
read
readFrame
VideoWriter
VideoWriter
close
VideoWriter.getProfiles
open
writeVideo
view
viewmtx
visdiff
volumebounds
voronoi
voronoiDiagram
voronoin
waitbar
waitfor
waitforbuttonpress
warndlg
warning
waterfall
web
weboptions
webread
websave
webwrite
week
weekday
what
whatsnew
which
while
whitebg
who
who
whos
whos
width

wilkinson
winopen
winqueryreg
winter
withtol
workspace
write
write
writetable
write
writeDirectory
writeEncodedStrip
writeEncodedTile
xlabel
xtickangle
xtickformat
xticklabels
xticks
matlab.wsdl.createWSDLClient
matlab.wsdl.setWSDLToolPath
year
years
ylabel
ymd
ytickangle
ytickformat
yticklabels
yticks
yyaxis
yyyymmdd
zlabel
xlim
ylim
zlim
ztickangle
ztickformat
zticklabels
zticks
xlsfinfo
xlsread

xlswrite
xmlread
xmlwrite
xor
xslt
zeros
zip
zoom
appdesigner
Button Properties
ButtonGroup Properties
CheckBox Properties
DiscreteKnob Properties
DropDown Properties
EditField Properties
Gauge Properties
Knob Properties
Label Properties
Lamp Properties
LinearGauge Properties
ListBox Properties
NinetyDegreeGauge Properties
NumericEditField Properties
Panel Properties
RadioButton Properties
RockerSwitch Properties
scroll
SemicircularGauge Properties
Slider Properties
Spinner Properties
StateButton Properties
Switch Properties
Tab Properties
TabGroup Properties
TextArea Properties
ToggleButton Properties
ToggleSwitch Properties
uialert
uiaxes
UIAxes Properties

uibutton
uicheckbox
uidropdown
uieditfield
uifigure
UI Figure Properties
uigauge
uiknob
uilabel
uilamp
uilistbox
uiradiobutton
uislider
uispinner
uiswitch
uitextarea
uitogglebutton
matlab.System
matlab.System Constructor
allowModelReferenceDiscreteSampleTimeInheritanceImpl
getDiscreteStateImpl
getGlobalNamesImpl
getHeaderImpl
getInputNamesImpl
getNumInputsImpl
getNumOutputsImpl
getOutputNamesImpl
getPropertyGroupsImpl
getSimulateUsingImpl
infoImpl
isInactivePropertyImpl
isInputSizeLockedImpl
loadObjectImpl
processTunedPropertiesImpl
releaseImpl
resetImpl
saveObjectImpl
setProperties
setupImpl
showFiSettingsImpl

showSimulateUsingImpl
stepImpl
supportsMultipleInstanceImpl
validateInputsImpl
validatePropertiesImpl
matlab.system.display.Action
matlab.system.display.Header
matlab.system.display.Section
matlab.system.display.SectionGroup
matlab.system.mixin.CustomIcon
getIconImpl
matlab.system.mixin.FiniteSource
isDoneImpl
matlab.system.mixin.Nondirect
isInputDirectFeedthroughImpl
outputImpl
updateImpl
matlab.system.mixin.Propagates
getDiscreteStateSpecificationImpl
getOutputDataTypeImpl
getOutputSizeImpl
isOutputComplexImpl
isOutputFixedSizeImpl
propagatedInputComplexity
propagatedInputDataType
propagatedInputFixedSize
propagatedInputSize
matlab.system.StringSet
clone
getNumInputs
getNumOutputs
isLocked
release
reset
step
matlab.system.display.Icon

Logical Operators: Short-Circuit && ||

Logical operations with short-circuiting

Syntax

```
expr1 && expr2
expr1 || expr2
```

Description

`expr1 && expr2` represents a logical `AND` operation that employs short-circuiting behavior. That is, `expr2` is not evaluated if `expr1` is logical `0` (`false`). Each expression must evaluate to a scalar logical result.

`expr1 || expr2` represents a logical `OR` operation that employs short-circuiting behavior. That is, `expr2` is not evaluated if `expr1` is logical `1` (`true`). Each expression must evaluate to a scalar logical result.

Examples

Use Scalar Logical Conditions

Create two vectors.

```
X = [1 0 0 1 1];
Y = [0 0 0 0 0];
```

Using the short-circuit OR operator with `X` and `Y` returns an error. The short-circuit operators operate only with scalar logical conditions.

Use the `any` and `all` functions to reduce each vector to a single logical condition.

```
any(X) || any(Y)
```

```
ans = logical
   1
```

The expression is equivalent to `1 OR 0`, so it evaluates to logical `1` (`true`) after computing only the first condition, `any(X)`.

Specify Dependent Logical Conditions

Specify a logical statement where the second condition depends on the first. In the following statement, it doesn't make sense to evaluate the relation on the right if the divisor, `b`, is zero.

```
b = 1;
a = 20;
x = (b ~= 0) && (a/b > 18.5)
```

```
x = logical
   1
```

The result is logical `1` (`true`). However, if `(b ~= 0)` evaluates to `false`, MATLAB® assumes the entire expression to be `false` and terminates its evaluation of the expression early.

Specify `b = 0` and evaluate the same expression.

```
b = 0;
x = (b ~= 0) && (a/b > 18.5)
```

```
x = logical
   0
```

The result is logical `0` (`false`). The first statement evaluates to logical `0` (`false`), so the expression short-circuits.

Change Structure Field Value

Create a structure with fields named `'File'` and `'Format'`.

```
S = struct('File',{'myGraph'},'Format',[])
```

```
S = struct with fields:
      File: 'myGraph'
```

```
    Format: []
```

Short-circuit expressions are useful in `if` statements when you want multiple conditions to be true. The conditions can build on one another in such a way that it only makes sense to evaluate the second expression if the first expression is true.

Specify an `if` statement that executes only when `S` contains an empty field named `'Format'`.

```
if isfield(S,'Format') && isempty(S.Format)
  S.Format = '.png';
end
S
```

```
S = struct with fields:
      File: 'myGraph'
    Format: '.png'
```

The first condition tests if `'Format'` is the name of a field in structure `S`. The second statement then tests whether the `Format` field is empty. The truth of the second condition depends on the first. The second condition can never be true if the first condition is not true. Since `S` has an empty field named `'Format'`, the body statement executes and assigns `S.Format` the value `'.png'`.

Definitions

Logical Short-Circuiting

With logical short-circuiting, the second operand, `expr2`, is evaluated only when the result is not fully determined by the first operand, `expr1`.

Due to the properties of logical AND and OR, the result of a logical expression is sometimes fully determined before evaluating all of the conditions. The logical `and` operator returns logical `0` (`false`) if even a single condition in the expression is false. The logical `or` operator returns logical `1` (`true`) if even a single condition in the expression is true. When the evaluation of a logical expression terminates early by encountering one of these values, the expression is said to have *short-circuited*.

For example, in the expression `A && B`, MATLAB® does not evaluate condition `B` at all if condition `A` is false. If `A` is false, then the value of `B` does not change the outcome of the operation.

When you use the element-wise `&` and `|` operators in the context of an `if` or `while` loop expression (and *only* in that context), they use short-circuiting to evaluate expressions.

Note: Always use the `&&` and `||` operators to enable short-circuit evaluation. Using the `&` and `|` operators for short-circuiting can yield unexpected results when the expressions do not evaluate to logical scalars.

See Also

See Also

`all` | `and` | `any` | `false` | `find` | `logical` | `or` | `true` | `xor`

Topics

"Reduce Logical Arrays to Single Value"
"MATLAB Operators and Special Characters"

colon, :

Vector creation, array subscripting, and `for`-loop iteration

The colon is one of the most useful operators in MATLAB. It can create vectors, subscript arrays, and specify `for` iterations.

Syntax

```
x = j:k
```

```
x = j:i:k
```

```
A(:,n)
```

```
A(m,:)
```

```
A(:)
```

```
A(j:k)
```

Description

`x = j:k` creates a unit-spaced vector `x` with elements `[j,j+1,j+2,...,j+m]` where `m = fix(k-j)`. If `j` and `k` are both integers, then this is simply `[j,j+1,...,k]`.

`x = j:i:k` creates a regularly-spaced vector `x` using `i` as the increment between elements. The vector elements are roughly equal to `[j,j+i,j+2*i,...,j+m*i]` where `m = fix((k-j)/i)`. However, if `i` is not an integer, then floating point arithmetic plays a role in determining whether `colon` includes the endpoint `k` in the vector, since `k` might not be *exactly* equal to `j+m*i`. If you specify nonscalar arrays, then MATLAB interprets `j:i:k` as `j(1):i(1):k(1)`.

`x = colon(j,k)` and `x = colon(j,i,k)` are alternate ways to execute the commands `j:k` and `j:i:k`, but are rarely used. These syntaxes enable operator overloading for classes.

`A(:,n)`, `A(m,:)`, `A(:)`, and `A(j:k)` are common indexing expressions for a matrix `A` that contain a colon. When you use a colon as a subscript in an indexing expression, such

as `A(:,n)`, it acts as shorthand to include *all* subscripts in a particular array dimension. It is also common to create a vector with a colon for the purposes of indexing, such as `A(j:k)`. Some indexing expressions combine both uses of the colon, as in `A(:,j:k)`.

Common indexing expressions that contain a colon are:

- `A(:,n)` is the `n`th column of matrix `A`.
- `A(m,:)` is the `m`th row of matrix `A`.
- `A(:,:,p)` is the `p`th page of three-dimensional array `A`.
- `A(:)` reshapes all elements of `A` into a single column vector. This has no effect if `A` is already a column vector.
- `A(:,:)` reshapes all elements of `A` into a two-dimensional matrix. This has no effect if `A` is already a matrix or vector.
- `A(j:k)` uses the vector `j:k` to index into `A` and is therefore equivalent to the vector `[A(j), A(j+1), ..., A(k)]`.
- `A(:,j:k)` includes all subscripts in the first dimension but uses the vector `j:k` to index in the second dimension. This returns a matrix with columns `[A(:,j), A(:,j+1), ..., A(:,k)]`.

Examples

Create Unit-Spaced Vector

Create a unit-spaced vector of numbers between 1 and 10. The colon operator uses a default increment of +1.

```
x = 1:10
```

```
x =

     1     2     3     4     5     6     7     8     9    10
```

Create Vector with Specified Increment

Create vectors that increment or decrement by a specified value.

Create a vector whose elements increment by 0.1.

```
x = 0:0.1:1
```

```
x =

         0    0.1000    0.2000    0.3000    0.4000    0.5000    0.6000    0.7000    0.8
```

Create a vector whose elements decrement by -2.

```
y = 10:-2:0
```

```
y =

    10     8     6     4     2     0
```

Index Matrix Rows and Columns

Examine several ways to index a matrix using a colon `:`.

Create a 3-by-3 matrix. Index the first row.

```
A = magic(3)
```

```
A =

     8     1     6
     3     5     7
     4     9     2
```

```
A(1,:)
```

```
ans =

     8     1     6
```

Index the second and third column.

```
A(:,2:3)
```

```
ans =

     1     6
     5     7
```

```
     9     2
```

Reshape the matrix into a column vector.

```
A(:)
```

```
ans =

     8
     3
     4
     1
     5
     9
     6
     7
     2
```

Specify `for`-loop Iterations

In the context of a `for`-loop, the colon specifies the loop iterations.

Write a `for`-loop that squares a number for values of `n` between 1 and 4.

```
for n = 1:4
    n^2
end
```

```
ans = 1

ans = 4

ans = 9

ans = 16
```

Input Arguments

`j` — Starting vector value
scalar

Starting vector value, specified as a real numeric scalar. If `j < k` so that the output vector is not empty, then `j` is the first element in the vector.

Example: `x = 0:5`

Example: `x = 0:0.5:5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char` | `datetime` | `duration`

`k` — Ending vector value

scalar

Ending vector value, specified as a real numeric scalar. `k` is the last value in the vector only when the increment lines up to exactly land on `k`. For example, the vector `0:5` includes 5 as the last value, but `0:0.3:1` does not include the value 1 as the last value since the increment does not line up with the endpoint.

Example: `x = 0:5`

Example: `x = 0:0.5:5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char` | `datetime` | `duration`

`i` — Increment between vector elements

1 (default) | scalar

Increment between vector elements, specified as a real numeric scalar.

Example: `x = 0:0.5:5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char` | `datetime` | `duration`

Output Arguments

`x` — Regularly-spaced vector

row vector

Regularly-spaced vector, returned as a row vector. If `j > k`, then `x = j:k` is an empty matrix. More generally, the syntax `x = j:i:k` returns an empty matrix when:

- `i`, `j`, or `k` is an empty input

- `i == 0`
- `i > 0` and `j > k`
- `i < 0` and `j < k`

Tips

- The `for` reference page has a description of how to use `:` in the context of loop statements.
- `linspace` is similar to the colon operator `:`, but it gives direct control over the number of points and always includes the endpoints. The sibling function `logspace` generates logarithmically spaced values.
- When you create a vector to index into a cell array or structure array (such as *`cellName`*`{:}` or *`structName`*`(:).`*`fieldName`*), MATLAB returns multiple outputs in a comma-separated list. For more information, see "How to Use the Comma-Separated Lists".

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with some limitations. For more information, see "Index and View Tall Array Elements".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Complex inputs are not supported.

- The input `i` cannot have a logical value.
- Vector inputs are not supported.
- Inputs must be constants.
- Uses single-precision arithmetic to produce single-precision results.

See Also

See Also

`for` | `linspace` | `logspace` | `reshape` | `varargin`

Topics

"Generate Sequence of Dates and Time"
"MATLAB Operators and Special Characters"
"Matrix Indexing"

Introduced before R2006a

abs

Absolute value and complex magnitude

Syntax

```
Y = abs(X)
```

Description

`Y = abs(X)` returns the absolute value of each element in array `X`.

If `X` is complex, `abs(X)` returns the complex magnitude.

Examples

Absolute Value of Scalar

```
y = abs(-5)
```

```
y = 5
```

Absolute Value of Vector

Create a numeric vector of real values.

```
x = [1.3 -3.56 8.23 -5 -0.01]'
```

```
x =

    1.3000
   -3.5600
    8.2300
   -5.0000
   -0.0100
```

Find the absolute value of the elements of the vector.

```
y = abs(x)
```

```
y =

    1.3000
    3.5600
    8.2300
    5.0000
    0.0100
```

Magnitude of Complex Number

```
y = abs(3+4i)
```

```
y = 5
```

Input Arguments

X — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. If `X` is complex, then it must be a `single` or `double` array. The size and data type of the output array is the same as the input array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

Definitions

Absolute Value

The absolute value (or modulus) of a real number is the corresponding nonnegative value that disregards the sign.

For a real value, `a`, the absolute value is:

- `a`, if `a` is greater than or equal to zero

- `-a`, if `a` is less than zero

`abs(-0)` returns `0`.

Complex Magnitude

The complex magnitude (or modulus) is the length of a vector from the origin to a complex value plotted in the complex plane.

For a complex value, $|a+bi|$ is defined as $\sqrt{a^2+b^2}$.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`angle` | `hypot` | `sign` | `unwrap`

Introduced before R2006a

accumarray

Construct array with accumulation

Syntax

```
A = accumarray(subs,val)
A = accumarray(subs,val,sz)
A = accumarray(subs,val,sz,fun)
A = accumarray(subs,val,sz,fun,fillval)
A = accumarray(subs,val,sz,fun,fillval,issparse)
```

Description

`A = accumarray(subs,val)` returns array `A` by accumulating elements of vector `val` using the subscripts `subs`. If `subs` is a column vector, then each element defines a corresponding subscript in the output, which is also a column vector. The `accumarray` function collects all elements of `val` that have identical subscripts in `subs` and stores their sum in the location of `A` corresponding to that subscript (for index `i`, `A(i)=sum(val(subs(:)==i))`). Elements of `A` whose subscripts do not appear in `subs` are equal to 0.

For an *m*-by-*n* matrix `subs`, each row represents an *n*-dimensional subscript into output `A`. The ith row of `subs` corresponds to the ith element in the vector `val`.

`A = accumarray(subs,val,sz)` returns an array, `A`, with size `sz`. Specify `sz` as a vector of positive integers to define the size of the output, or as `[]` to let the subscripts in `subs` determine the size of the output. Use `sz` when `subs` does not reference trailing rows, columns, or dimensions that you would like to be present in the output.

`A = accumarray(subs,val,sz,fun)` applies the function `fun` to each subset of elements in `val` that have identical subscripts in `subs`. Specify `fun` using the `@` symbol (e.g., `@mean`), or as `[]` to use the default function, `@sum`.

`A = accumarray(subs,val,sz,fun,fillval)` fills all elements of `A` that are not referred to by any subscript in `subs` with the scalar value, `fillval`. The `fillval` input must have the same class as the values returned by `fun`. Specify `fillval` as `[]` to use the default value, `0`.

`A = accumarray(subs,val,sz,fun,fillval,issparse)` returns an array, `A`, that is sparse if the scalar `issparse` is `true` or `1`, and full if `issparse` is `false` or `0`. The output, `A`, is full by default.

Examples

Find Bin Counts

Create a vector of subscripts, `subs`.

```
subs = [1; 2; 4; 2; 4]
```

```
subs =

     1
     2
     4
     2
     4
```

Use `accumarray` with `val = 1` to count the number of identical subscripts in `subs`.

```
A = accumarray(subs,1)
```

```
A =

     1
     2
     0
     2
```

The result is a vector of bin counts. You can obtain the same answer with `histcounts(subs,'BinMethod','integers')`. However, `accumarray` also can compute bin counts over higher dimensional grids.

Accumulate Data

Create a vector of data, `val`, and a vector of subscript values with the same length, `subs`.

```
val = 101:105';
```

```
subs = [1; 3; 4; 3; 4]
```

```
subs =

     1
     3
     4
     3
     4
```

Use `accumarray` to sum the values in `val` that have identical subscripts in `subs`.

```
A = accumarray(subs,val)
```

```
A =

   101
     0
   206
   208
```

The result is a vector of accumulated values. Since the second and fourth elements of `subs` are equal to 3, `A(3)` is the sum of the second and fourth elements of `val`, that is, `A(3) = 102 + 104 = 206`. Also, `A(2) = 0` because `subs` does not contain the value 2. Since `subs` is a vector, the output, `A`, is also a vector. The length of `A` is `max(subs,[],1)`.

Specify Output Size

Create a vector of data, `val`, and a matrix of subscripts, `subs`.

```
val = 101:106';
subs = [1 1; 2 2; 3 2; 1 1; 2 2; 4 1]
```

```
subs =

     1     1
     2     2
     3     2
     1     1
     2     2
     4     1
```

The subscripts in `subs` define a 4-by-2 matrix for the output.

Use `accumarray` to sum the values in `val` that have identical subscripts in `subs`.

```
A = accumarray(subs,val)
```

```
A =

   205     0
     0   207
     0   103
   106     0
```

The result is a 4-by-2 matrix of accumulated values.

Use the `sz` input of `accumarray` to return a 4-by-4 matrix. You can specify a size with each dimension equal to or greater than the default size, in this case 4-by-2, but not smaller.

```
A = accumarray(subs,val,[4 4])
```

```
A =

   205     0     0     0
     0   207     0     0
     0   103     0     0
   106     0     0     0
```

The result is a 4-by-4 matrix of accumulated values.

Use Custom Functions

Create a vector of data, `val`, and a matrix of subscripts, `subs`.

```
val = [100.1 101.2 103.4 102.8 100.9 101.5]';
subs = [1 1; 1 1; 2 2; 3 2; 2 2; 3 2]
```

```
subs =

     1     1
```

```
     1     1
     2     2
     3     2
     2     2
     3     2
```

The subscripts in `subs` define a 3-by-2 matrix for the output.

Use the `fun` input of `accumarray` to calculate the within-group variances of data in `val` that have identical subscripts in `subs`. Specify `fun` as `@var`.

```
A1 = accumarray(subs,val,[],@var)
```

```
A1 =

    0.6050         0
         0    3.1250
         0    0.8450
```

The result is a 3-by-2 matrix of variance values.

Alternatively, you can specify `fun` as an anonymous function so long as it accepts vector inputs and returns a scalar. A common situation where this is useful is when you want to pass additional parameters to a function. In this case, use the `var` function with a normalization parameter.

```
A2 = accumarray(subs,val,[],@(x) var(x,1))
```

```
A2 =

    0.3025         0
         0    1.5625
         0    0.4225
```

The result is a 3-by-2 matrix of normalized variance values.

Sum Values Natively

Create a vector of data, `val`, and a matrix of subscripts, `subs`.

```
val = int8(10:15);
```

```
subs = [1 1 1; 1 1 1; 1 1 2; 1 1 2; 2 3 1; 2 3 2]
```

```
subs =

     1     1     1
     1     1     1
     1     1     2
     1     1     2
     2     3     1
     2     3     2
```

The subscripts in `subs` define a 2-by-3-by-2 multidimensional array for the output.

Use `accumarray` to sum the data values in `val` that have identical subscripts in `subs`. You can use a function handle to sum the values in their native, `int8`, integer class by using the `'native'` option of the `sum` function.

```
A = accumarray(subs,val,[],@(x) sum(x,'native'))
```

```
A = 2×3×2 int8 array

(:,:,1) =

   21    0    0
    0    0   14


(:,:,2) =

   25    0    0
    0    0   15
```

The result is a 2-by-3-by-2 multidimensional array of class `int8`.

Group Values in Cell Array

Create a vector of data, `val`, and a matrix of subscripts, `subs`.

```
val = 1:10;
subs = [1 1;1 1;1 1;1 1;2 1;2 1;2 1;2 1;2 1;2 2]
```

```
subs =
```

```
     1     1
     1     1
     1     1
     1     1
     2     1
     2     1
     2     1
     2     1
     2     1
     2     2
```

The subscripts in `subs` define a 2-by-2 matrix for the output.

Use `accumarray` to group the elements of `val` into a cell array.

```
A = accumarray(subs,val,[],@(x) {x})
```

```
A = 2×2 cell array
    [4×1 double]      []
    [5×1 double]    [10]
```

The result is a 2-by-2 cell array.

Verify that the vector elements are in the same order as they appear in `val`.

```
A{2,1}
```

```
ans =

     5
     6
     7
     8
     9
```

Since the subscripts in `subs` are sorted, the elements of the numeric vectors in the cell array are in the same order as they appear in `val`.

Using Functions That Depend on Data Order

Create a vector of data, `val`, and a matrix of subscripts, `subs`.

```
val = 1:5;
subs = [1 2; 1 1; 1 2; 1 1; 2 3]
```

```
subs =

     1     2
     1     1
     1     2
     1     1
     2     3
```

The subscripts in `subs` define a 2-by-3 matrix for the output, but are unsorted with respect to the linear indices in the output, `A`.

Group the values in `val` into a cell array by specifying `fun = @(x) {x}`.

```
A = accumarray(subs,val,[],@(x) {x})
```

```
A =

  2×3 cell array

    [2×1 double]    [2×1 double]     []
              []              []    [5]
```

The result is a 2-by-3 cell array.

Examine the vector in `A{1,2}`.

```
A{1,2}
```

```
ans =

     3
     1
```

The elements of the `A{1,2}` vector are in a different order than in `val`. The first element of the vector is 3 instead of 1. If the subscripts in `subs` are not sorted with respect to

their linear indices, then `accumarray` might not always preserve the order of the data in `val` when it passes them to `fun`. In the unusual case that `fun` requires that its input values be in the same order as they appear in `val`, sort the indices in `subs` with respect to the linear indices of the output.

In this case, use the `sortrows` function with two inputs and two outputs to reorder `subs` and `val` concurrently with respect to the linear indices of the output.

```
[S,I] = sortrows(subs,[2,1]);
A = accumarray(S,val(I),[],@(x) {x});
A{1,2}
```

```
ans =

     1
     3
```

The elements of the `A{1,2}` vector are now in sorted order.

Fill Output with NaN Values

Create a vector of data, `val`, and a matrix of subscripts, `subs`.

```
val = 101:106';
subs = [1 1; 2 2; 3 3; 1 1; 2 2; 4 4]
```

```
subs =

     1     1
     2     2
     3     3
     1     1
     2     2
     4     4
```

The subscripts in `subs` define a 4-by-4 matrix for the output, but only reference 4 out of the 16 elements. By default, the other 12 elements are `0` in the output.

Use the `fillval` input of `accumarray` to fill in the extra output elements with NaN values.

```
A = accumarray(subs,val,[],[],NaN)
```

```
A =

   205   NaN   NaN   NaN
   NaN   207   NaN   NaN
   NaN   NaN   103   NaN
   NaN   NaN   NaN   106
```

The result is a 4-by-4 matrix padded with NaN values.

Change Output Sparsity

Create a vector of data, `val`, and a matrix of subscripts, `subs`.

```
val = [34 22 19 85 53 77 99 6];
subs = [1 1; 400 400; 80 80; 1 1; 400 400; 400 400; 80 80; 1 1]
```

```
subs =

     1     1
   400   400
    80    80
     1     1
   400   400
   400   400
    80    80
     1     1
```

The subscripts in `subs` define a 400-by-400 matrix for the output, but only reference 3 out of the 160,000 elements. When the result of an operation with `accumarray` leads to a large output array with low density of nonzero elements, you can save storage space by storing the output as a sparse matrix.

Use the `issparse` input of `accumarray` to return a sparse matrix.

```
A = accumarray(subs,val,[],[],[],true)
```

```
A =
   (1,1)       125
  (80,80)      118
```

```
(400,400)     152
```

The result is a sparse matrix. You can obtain the same answer with `sparse(subs(:,1),subs(:,2),val)`.

Input Arguments

`subs` — Subscript matrix

vector of indices | matrix of indices | cell array of index vectors

Subscript matrix, specified as a vector of indices, matrix of indices, or cell array of index vectors. The indices must be positive integers:

- The value in each row of the m-by-n matrix, `subs`, specifies an n-dimensional index into the output, `A`. For example, if `subs` is a 3-by-2 matrix, it contains three 2-D subscripts. `subs` also can be a column vector of indices, in which case the output, `A`, is also a column vector.
- The ith row in `subs` corresponds to the ith data value in `val`.
- If `subs` is empty, then the `accumarray` function errors.

Thus, `subs` determines which data in `val` to group, as well as its final destination in the output. If `subs` is a cell array of index vectors, each vector must have the same length, and the function treats the vectors as columns of a subscript matrix.

`val` — Data

vector | scalar

Data, specified as a vector or scalar:

- If `val` is a vector, it must have the same length as the number of rows in `subs`.
- If `val` is a scalar, it is scalar expanded.

In both cases, a one-to-one pairing is present between the subscripts in each row of `subs` and the data values in `val`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`

Complex Number Support: Yes

`sz` — Size of output array

`[]` (default) | vector of positive integers

Size of output array, specified as a vector of positive integers or `[]` (default). When you specify `[]` for the default size, the values in `subs` determine the size of the output array, `A`.

When you specify `sz` as a vector of positive integers, it must satisfy these properties:

- If `subs` is a nonempty *m*-by-*n* matrix with `n > 1` columns, then `sz` must have *n* elements and pass the logical test `all(sz >= max(subs,[],1))`.
- If `subs` is a nonempty column vector, then `sz` must be `[m 1]` where `m >= max(subs)`.

Example: `sz = [3 3]`

`fun` — Function

`[]` (default) | function handle

Function, specified as a function handle or `[]` (default). The default function is `@sum`. The `fun` function must accept a column vector and return a numeric, `logical`, or `char` scalar, or a scalar `cell`. If the subscripts in `subs` are not sorted with respect to their linear indices, `fun` should not depend on the order of the values in its input data. For more information on function handles, see “Create Function Handle”.

Example: `fun = @max`

Data Types: `function_handle`

`fillval` — Fill value

`[]` (default) | scalar

Fill value, specified as a scalar or `[]` (default). The default value of `fillval` is `0`. If `subs` does not reference each element in the output, `accumarray` fills in the output with the value specified by `fillval`. The class of `fillval` must be the same as the values returned by `fun`.

`issparse` — Output sparsity

`false` (default) | `true` | `1` | `0`

Output sparsity, specified as `true`, `1`, `0`, or `false` (default). Specify `true` or `1` when you want the output array to be sparse. If `issparse` is `true` or `1`:

- `fillval` must be `0` or `[]`.
- The values in `val` and the output values of `fun` must both have type `double`.

Output Arguments

A — Output array

vector | matrix | multidimensional array

Output array, returned as a vector, matrix, or multidimensional array. `A` has the same class as the values returned by `fun`.

When `sz` is not specified, the size of `A` depends on the input `subs`:

- If `subs` is a nonempty matrix with `n > 1` columns, then `A` is an *n*-dimensional array of size `max(subs,[],1)`.
- If `subs` is an empty matrix with `n > 1` columns, then `A` is an *n*-dimensional empty array with size 0-by-0-by-...-by-0.
- If `subs` is a nonempty column vector, then `A` is a column vector of length `max(subs,[],1)`. The length of `A` is `0` when `subs` is empty.

Definitions

Accumulating Elements

The following graphic illustrates the behavior of `accumarray` on a vector of temperature data taken over a 12-month period. To find the maximum temperature reading for each month, `accumarray` applies the `max` function to each group of values in `temperature` that have identical subscripts in `month`.

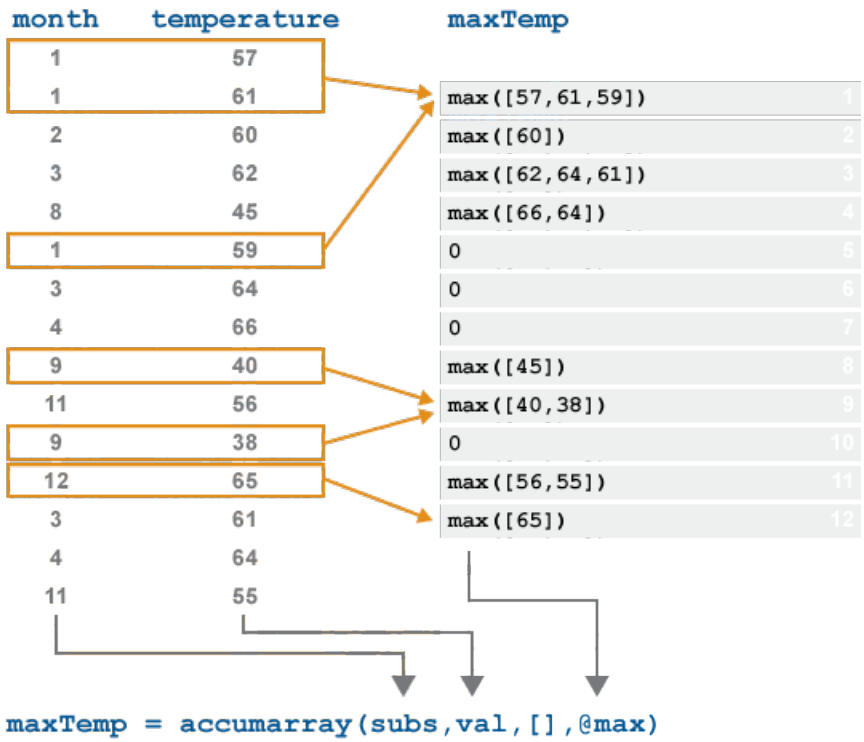

No values in `month` point to the 5, 6, 7, or 10 positions of the output. These elements are `0` in the output by default, but you can specify a value to fill in using `fillval`.

Tips

- The behavior of `accumarray` is similar to that of the `histcounts` function. Both functions group data into bins.
  - `histcounts` groups continuous values into a 1-D range using bin edges. `accumarray` groups data using *n*-dimensional subscripts.
  - `histcounts` returns the bin counts and/or bin placement. However, `accumarray` can apply any function to the binned data.

  You can mimic the behavior of `histcounts` using `accumarray` with `val = 1`.

- The `sparse` function also has accumulation behavior similar to that of `accumarray`.
  - `sparse` groups data into bins using 2-D subscripts, whereas `accumarray` groups data into bins using n-dimensional subscripts.
  - For elements with identical subscripts, `sparse` assigns the sum of those elements to the output. `accumarray` does the same by default, but optionally can apply any function to the bins.

See Also

See Also

`full` | `histcounts` | `sparse` | `sum`

Introduced before R2006a

acos

Inverse cosine in radians

Syntax

```
y = acos(x)
```

Description

`y = acos(x)` returns the "Inverse Cosine" on page 1-113 ($\cos^{-1}$) of the elements of `x`. The `acos` function operates element-wise on arrays. For real elements of `x` in the interval `[-1,1]`, `acos(x)` returns real values in the interval `[0,pi]`. For real values of `x` outside the interval `[-1,1]` and for complex values of `x`, `acos(x)` returns complex values. All angles are in radians.

Examples

Inverse Cosine of a Value

```
acos(0.3)
```

```
ans = 1.2661
```

Inverse Cosine of a Vector of Complex Values

Find the inverse cosine of the elements of vector `x`. The `acos` function acts on `x` element-wise.

```
x = [0.5i 1+3i -2.2+i];
y = acos(x)
```

```
y =
   1.5708 - 0.4812i   1.2632 - 1.8642i   2.6799 - 1.5480i
```

Plot the Inverse Cosine Function

Plot the inverse cosine function over the domain $-1 \le x \le 1$.

```
x = -1:.05:1;
plot(x,acos(x))
grid on
```

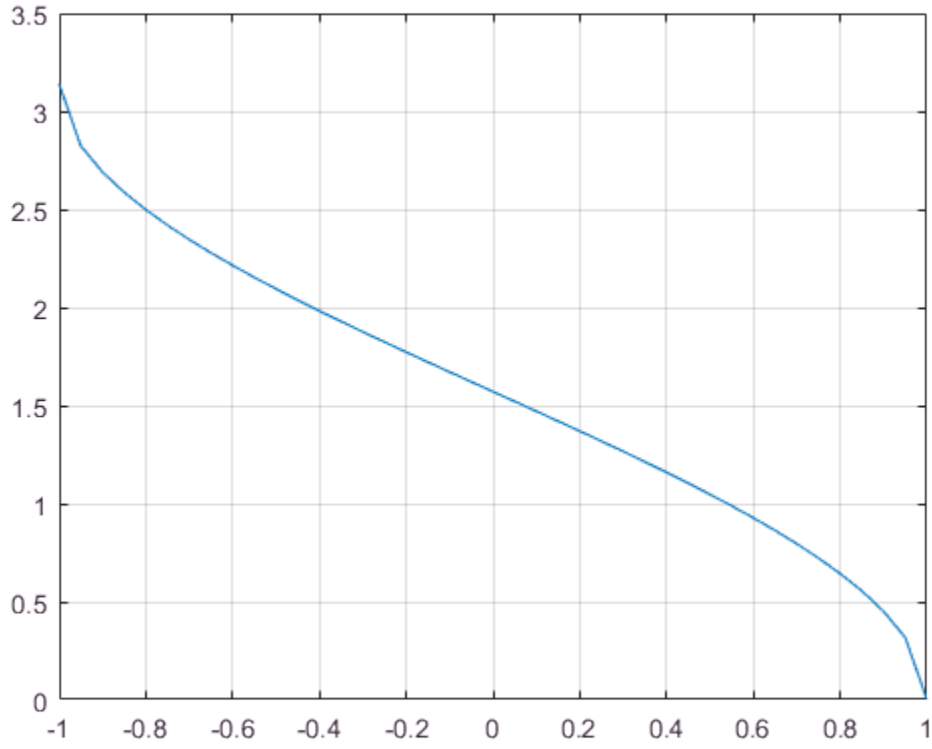

Input Arguments

x — Numeric input

number | vector | matrix | multidimensional array

Numeric input, specified as a number, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Definitions

Inverse Cosine

The inverse cosine is defined as

$$\cos^{-1}(z) = -i\log\left[z + i\left(1 - z^2\right)^{1/2}\right].$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generates an error during simulation and returns `NaN` in generated code when the input value `x` is real, but the output should be complex. To get the complex result, make the input value complex by passing in `complex(x)`.

See Also

See Also

`acosd` | `acosh` | `cos`

Introduced before R2006a

acosd

Inverse cosine in degrees

Syntax

```
Y = acosd(X)
```

Description

`Y = acosd(X)` returns the inverse cosine ($\cos^{-1}$) of the elements of `X` in degrees. The function's domain and range include complex values. For real elements of `X` in the domain [-1,1], `acosd` returns values in the range [0, 180]. For values of `X` outside this range, `acosd` returns complex values.

Examples

Inverse Cosine of 0

Verify that inverse cosine of 0 is exactly 90.

```
acosd(0)
```

```
ans = 90
```

Round-Trip Calculation for Complex Angles

Show that the inverse cosine, followed by cosine, returns the original values of `X`.

```
cosd(acosd([2 3]))
```

```
ans =

    2.0000    3.0000
```

`acosd([2 3])` returns two complex angles, which are then passed to the `cosd` function. `cosd` returns the original values, `2` and `3`.

Input Arguments

X — Cosine of angle

scalar value | vector | matrix | N-D array

Cosine of angle, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `acosd` operation is element-wise when `X` is non-scalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

acos | cos | cosd

Introduced before R2006a

acosh

Inverse hyperbolic cosine

Syntax

```
Y = acosh(X)
```

Description

`Y = acosh(X)` returns the inverse hyperbolic cosine for each element of `X`.

The `acosh` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

Examples

Graph of Inverse Hyperbolic Cosine Function

Graph the inverse hyperbolic cosine function over the domain $1 \le x \le \pi$.

```
x = 1:pi/40:pi;
plot(x,acosh(x))
grid on
xlabel('x')
ylabel('y')
```

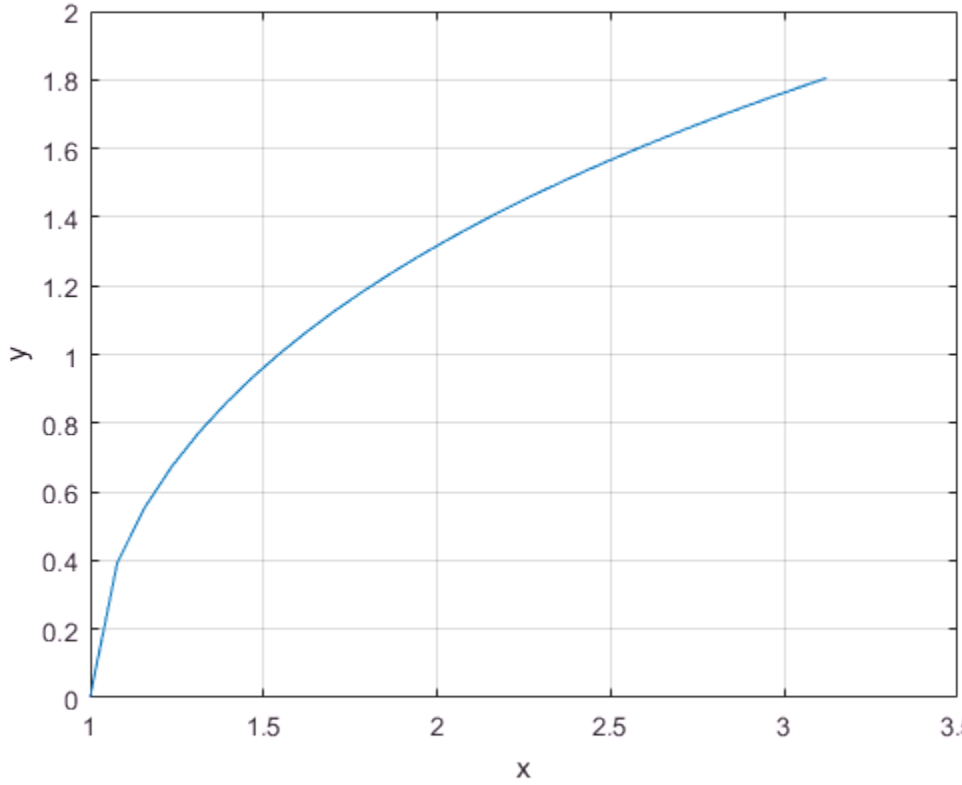

Definitions

Inverse Hyperbolic Cosine

For real values x in the domain $x > 1$, the inverse hyperbolic cosine satisfies

$$\cosh^{-1}(x) = \log\left(x + \sqrt{x^2 - 1}\right).$$

For complex numbers $z = x + iy$, as well as real values in the domain $-\infty < z \leq 1$, the call `acosh(z)` returns complex results.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generates an error during simulation and returns `NaN` in generated code when the input value `x` is real, but the output should be complex. To get the complex result, make the input value complex by passing in `complex(x)`.

See Also

`acos` | `cosh` | `asinh` | `atanh`

Introduced before R2006a

acot

Inverse cotangent in radians

Syntax

```
Y = acot(X)
```

Description

`Y = acot(X)` returns the "Inverse Cotangent" on page 1-123 ($\cot^{-1}$) of the elements of `X`. The `acot` function operates element-wise on arrays. For real elements of `X`, `acot(X)` returns values in the interval `[-pi/2,pi/2]`. For complex values of `X`, `acot(X)` returns complex values. All angles are in radians.

Examples

Inverse Cotangent of a Value

```
acot(2.6)
```

```
ans = 0.3672
```

Inverse Cotangent of a Vector of Complex Values

Find the inverse cotangent of the elements of vector `x`. The `acot` function acts on `x` element-wise.

```
x = [0.5i 1+3i -2.2+i];
Y = acot(x)
```

```
Y =
   1.5708 - 0.5493i   0.1093 - 0.3059i  -0.3689 - 0.1506i
```

Plot the Inverse Cotangent Function

Plot the inverse cotangent function over the intervals $-2\pi \le x < 0$ and $0 < x \le 2\pi$.

```
x1 = -2*pi:pi/30:-0.1;
x2 = 0.1:pi/30:2*pi;
plot(x1,acot(x1),'b')
hold on
plot(x2,acot(x2),'b')
grid on
```

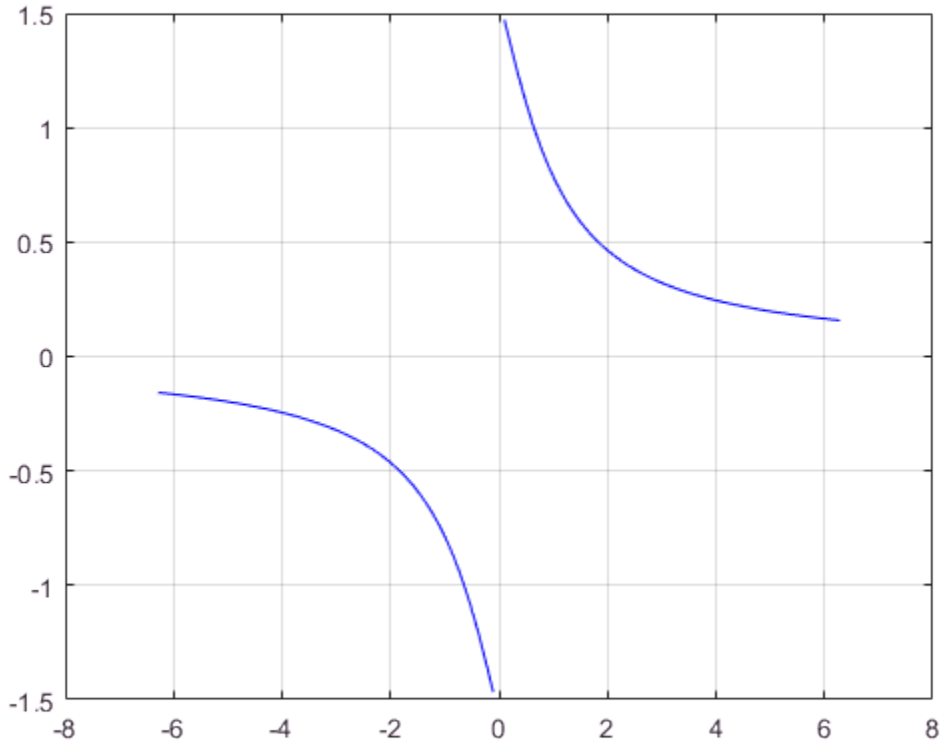

Input Arguments

X — Numeric input

number | vector | matrix | multidimensional array

Numeric input, specified as a number, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Definitions

Inverse Cotangent

The inverse cotangent is defined as

$$\cot^{-1}(z) = \tan^{-1}\left(\frac{1}{z}\right).$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`acotd` | `acoth` | `cot`

Introduced before R2006a

acotd

Inverse cotangent in degrees

Syntax

```
Y = acotd(X)
```

Description

`Y = acotd(X)` returns the inverse cotangent ($\cot^{-1}$) of the elements of `X` in degrees. The function's domain and range include complex values. For real elements of `X` in the range [-Inf,Inf], `acotd` returns values in the range [-90,90]. For complex values of `X`, `acotd` returns complex values.

Examples

Inverse Cotangent of Vector

```
x = [0 20 Inf];
y = acotd(x)
```

```
y =

   90.0000    2.8624         0
```

The `acotd` operation is element-wise when you pass a vector, matrix, or N-D array.

Inverse Cotangent of Complex Value

```
acotd(1+i)
```

```
ans =
  31.7175 -23.0535i
```

Input Arguments

X — Cotangent of angle

scalar value | vector | matrix | N-D array

Cotangent of angle, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `acotd` operation is element-wise when `X` is non-scalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`acot` | `cot` | `cotd`

Introduced before R2006a

acoth

Inverse hyperbolic cotangent

Syntax

```
Y = acoth(X)
```

Description

`Y = acoth(X)` returns the inverse hyperbolic cotangent for each element of `X`.

The `acoth` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

Examples

Graph of Inverse Hyperbolic Cotangent Function

Graph the inverse hyperbolic cotangent function over the domains $-30 \le x < -1$ and $1 < x \le 30$.

```
x1 = -30:0.1:-1.1;
x2 = 1.1:0.1:30;
plot(x1,acoth(x1),x2,acoth(x2))
grid on
xlabel('x')
ylabel('y')
```

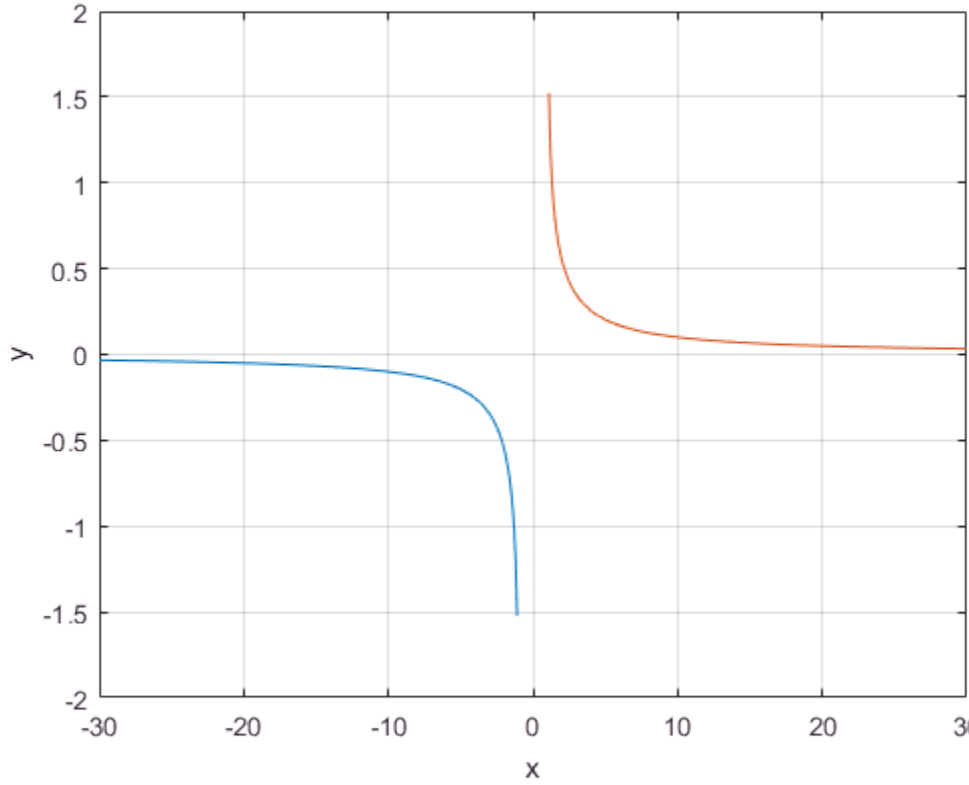

Definitions

Inverse Hyperbolic Cotangent

For real values x in the domain $-\infty < x < -1$ and $1 < x < \infty$, the inverse hyperbolic cotangent satisfies

$$\coth^{-1}(x) = \tanh^{-1}\left(\frac{1}{x}\right) = \frac{1}{2}\log\left(\frac{x+1}{x-1}\right).$$

For complex numbers $z = x + iy$ as well as real values in the domain $-1 \le z \le 1$, the call `acoth(z)` returns complex results.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`acot` | `coth` | `atanh` | `asinh` | `acosh`

Introduced before R2006a

acsc

Inverse cosecant in radians

Syntax

```
Y = acsc(X)
```

Description

`Y = acsc(X)` returns the "Inverse Cosecant" on page 1-133 ($\csc^{-1}$) of the elements of `X`. The `acsc` function operates element-wise on arrays. For real elements of `X` in intervals `[-Inf,-1]` and `[1,Inf]`, `acsc` returns real values in the interval `[-pi/2,pi/2]`. For real values of `X` in the interval `[-1,1]` and for complex values of `X`, `acsc` returns complex values. All angles are in radians.

Examples

Inverse Cosecant of a Value

```
acsc(3)
```

```
ans = 0.3398
```

Inverse Cosecant of a Vector of Complex Angles

Find the inverse cosecant of the elements of vector `x`. The `acsc` function acts on `x` element-wise.

```
x = [0.5i 1+3i -2.2+i];
Y = acsc(x)
```

```
Y =
   0.0000 - 1.4436i   0.0959 - 0.2970i  -0.3795 - 0.1833i
```

Plot the Inverse Cosecant Function

Plot the inverse cosecant function over the intervals $-10 \le x < -1$ and $1 < x \le 10$.

```
x1 = -10:0.01:-1.01;
x2 = 1.01:0.01:10;
plot(x1,acsc(x1),'b')
hold on
plot(x2,acsc(x2),'b')
grid on
```

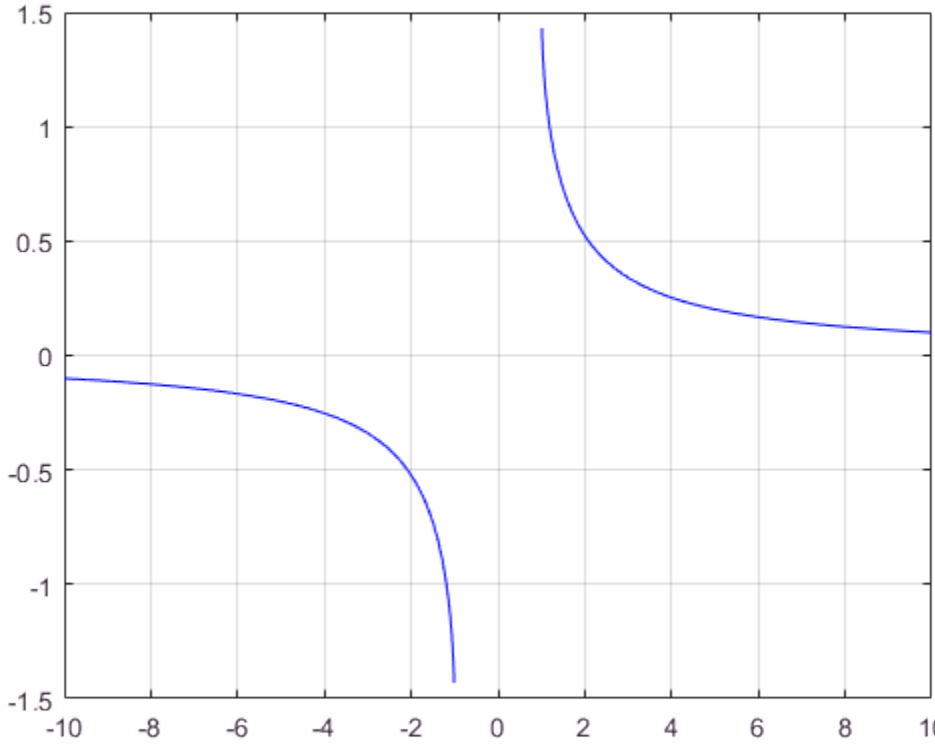

Input Arguments

X — Numeric input
number | vector | matrix | multidimensional array

Numeric input, specified as a number, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Definitions

Inverse Cosecant

The inverse cosecant is defined as

$$\csc^{-1}(z) = \sin^{-1}\left(\frac{1}{z}\right).$$

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`acscd` | `acsch` | `csc`

Introduced before R2006a

acscd

Inverse cosecant in degrees

Syntax

```
Y = acscd(X)
```

Description

`Y = acscd(X)` returns the inverse cosecant (cosec^{-1}) of the elements of `X` in degrees. The function's domain and range include complex values. For real elements of `X` in the domain [-Inf,1] and [1,Inf], `acscd` returns values in the range [-90,90]. For values of `X` outside this range, `acscd` returns complex values.

Examples

Inverse Cosecant of Vector

```
x = [20 10 Inf];
y = acscd(x)
```

```
y =

    2.8660    5.7392         0
```

The `acscd` operation is element-wise when you pass a vector, matrix, or N-D array.

Inverse Cosecant of Complex Value

```
acscd(1+i)
```

```
ans =
  25.9136 -30.4033i
```

Input Arguments

X — Cosecant of angle

scalar value | vector | matrix | N-D array

Cosecant of angle, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `acscd` operation is element-wise when `X` is non-scalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`acsc` | `csc` | `cscd`

Introduced before R2006a

acsch

Inverse hyperbolic cosecant

Syntax

```
Y = acsch(X)
```

Description

`Y = acsch(X)` returns the inverse hyperbolic cosecant for each element of `X`.

The `acsch` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

Examples

Graph of Inverse Hyperbolic Cosecant Function

Graph the inverse hyperbolic cosecant function over the domains $-20 \le x \le -1$ and $1 \le x \le 20$.

```
x1 = -20:0.01:-1;
x2 = 1:0.01:20;
plot(x1,acsch(x1),x2,acsch(x2))
grid on
xlabel('x')
ylabel('y')
```

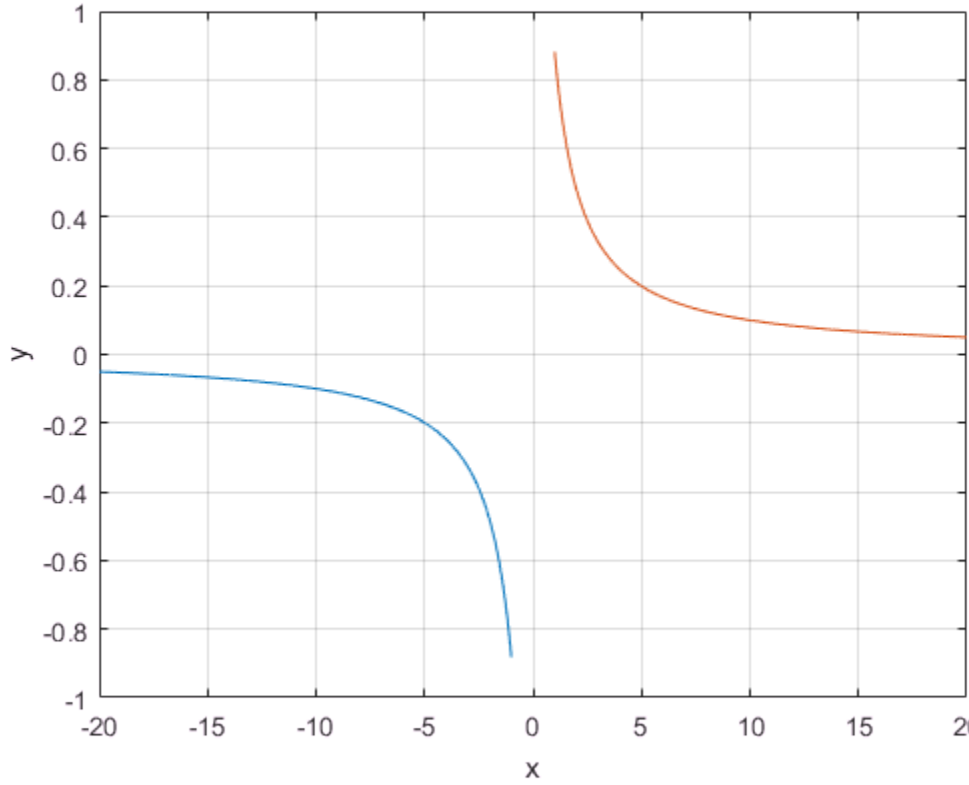

Definitions

Inverse Hyperbolic Cosecant

For real values x in the domain $x < 0$ and $x > 0$, the inverse hyperbolic cosecant satisfies

$$\operatorname{csch}^{-1}(z) = \sinh^{-1}\left(\frac{1}{z}\right) = \log\left(\frac{1}{x} + \sqrt{\frac{1}{x^2} + 1}\right).$$

For complex numbers $z = x + iy$, the call `acsch(z)` returns complex results.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`acsc` | `csch` | `asinh` | `acosh`

Introduced before R2006a

actxcontrol

Create Microsoft ActiveX control in figure window

Syntax

```
h = actxcontrol('progid')
h = actxcontrol('progid','param1',value1,...)
h = actxcontrol('progid',position)
h = actxcontrol('progid', position, fig_handle)
h = actxcontrol('progid',position,fig_handle,event_handler)
h =
actxcontrol('progid',position,fig_handle,event_handler,'filename')
```

Description

`h = actxcontrol('progid')` creates an ActiveX® control in a figure window. The programmatic identifier (`progid`) for the control determines the type of control created. (See the documentation provided by the control vendor to get this value.) The returned object, `h`, represents the default interface for the control.

You cannot use an ActiveX server for the `progid` because MATLAB cannot insert ActiveX servers in a figure. See `actxserver` for use with ActiveX servers.

`h = actxcontrol('progid','param1',value1,...)` creates an ActiveX control using the optional parameter name/value pairs. Parameter names include:

- `position` — MATLAB position vector specifying the position of the control. The format is [left, bottom, width, height] using pixel units.
- `parent` — Handle to parent figure, model, or Command Window.
- `callback` — Name of event handler. To use the same handler for all events, specify a single name. To handle specific events, specify a cell array of event name/event handler pairs.
- `filename` — Sets the initial conditions to the previously saved control.
- `licensekey` — License key to create licensed ActiveX controls that require design-time licenses. See “Deploy ActiveX Controls Requiring Run-Time Licenses” for information on how to use controls that require run-time licenses.

One possible format is:

```
h = actxcontrol('myProgid','newPosition',[0 0 200 200],...
    'myFigHandle',gcf,...
    'myCallback',{'Click' 'myClickHandler';...
    'DblClick' 'myDblClickHandler';...
    'MouseDown' 'myMouseDownHandler'});
```

Note: The following syntaxes are not recommended. Use the previous syntaxes instead.

`h = actxcontrol('progid',position)` creates an ActiveX control having the location and size specified in the vector, `position`. The format of this vector is:

```
[x y width height]
```

The first two elements of the vector determine where the control is placed in the figure window. `x` and `y` are offsets, in pixels, from the bottom left corner of the figure window to the same corner of the control. `width` and `height` determine the size of the control itself.

The default `position` vector is `[20 20 60 60]`.

`h = actxcontrol('progid', position, fig_handle)` creates an ActiveX control at the specified `position` in an existing figure window. The handle, `fig_handle`, identifies this window.

The `gcf` command returns the current figure handle.

Note If the figure window designated by `fig_handle` is invisible, the control is invisible. If you want the control you are creating to be invisible, use the handle of an invisible figure window.

`h = actxcontrol('progid',position,fig_handle,event_handler)` creates an ActiveX control that responds to events. Controls respond to events by invoking a MATLAB function whenever an event (such as clicking a mouse button) is fired. The `event_handler` argument identifies one or more functions to be used in handling events. For more information, see "Specifying Event Handlers" on page 1-143.

```
h =
actxcontrol('progid',position,fig_handle,event_handler,'filename')
```

creates an ActiveX control with the first four arguments, and sets its initial state to that of a previously saved control. MATLAB loads the initial state from the file specified in `filename`.

If you do not want to specify an `event_handler`, use `''` as the fourth argument.

The `progid` argument must match the `progid` of the saved control.

Specifying Event Handlers

There is more than one valid format for the `event_handler` argument. Use this argument to specify one of the following:

- A different event handler routine for each event supported by the control
- One common routine to handle selected events
- One common routine to handle all events

In the first case, use a cell array for the `event_handler` argument, with each row of the array specifying an event and handler pair:

```
{'event' 'eventhandler'; 'event2' 'eventhandler2'; ...}
```

`event` is either a character vector containing the event name or a numeric event identifier (see "Handling Events" on page 1-144). `eventhandler` is a character vector identifying the function you want the control to use in handling the event. Include only those events that you want enabled.

In the second case, use the same cell array syntax described, but specify the same `eventhandler` for each event. Again, include only those events that you want enabled.

In the third case, make `event_handler` a character vector (instead of a cell array) that contains the name of the one function that is to handle all events for the control.

There is no limit to the number of event and handler pairs you can specify in the `event_handler` cell array. However, if you register the same event name to the same callback handler multiple times, MATLAB executes the event only once.

Event handler functions accept a variable number of arguments.

Character vectors used in the `event_handler` argument are not case-sensitive.

Note Although using a single handler for all events might be easier sometimes, specifying an individual handler for each event creates more efficient code, resulting in better performance.

Examples

Handling Events

The `event_handler` argument specifies how you want the control to handle any events that occur. The control can handle all events with one common handler function, selected events with a common handler function, or each type of event can be handled by a separate function.

Create an `mwsamp` control with one event handler, `sampev`, to respond to all events:

```
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],gcf,'sampev');
```

Invoke event handler when events `Click` and `DblClick` are fired.

```
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],gcf,...
    {'Click' 'sampev'; 'DblClick' 'sampev'});
```

Assign a different handler routine to each event.

```
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],...
    gcf,{'Click', 'myclick'; 'DblClick' 'my2click'; ...
    'MouseDown' 'mymoused'});
```

Specify the events using numeric event identifiers.

```
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],...
    gcf,{-600, 'myclick'; -601 'my2click'; -605 'mymoused'});
```

Tips

If the control implements any custom interfaces, use the `interfaces` function to list them, and the `invoke` function to get a handle to a selected interface.

When you no longer need the control, call `release` to release the interface and free memory and other resources used by the interface. Releasing the interface does not delete the control itself. To release the interface, use the `delete` function.

For an example event handler, see the file `sampev.m` in the `toolbox\matlab\winfun\comcli` folder.

COM functions are available on Microsoft® Windows® systems only.

Note If you encounter problems creating Microsoft Forms 2.0 controls in MATLAB or other non-VBA container applications, see "Microsoft Forms 2.0 Controls".

See Also

See Also

`actxserver`

Topics

"Display Message for Workbook OnClose Event"
"COM Event Handlers"

Introduced before R2006a

actxcontrollist

List currently installed Microsoft ActiveX controls

Syntax

```
info = actxcontrollist
```

Description

`info = actxcontrollist` returns a list of controls in `info`, a `1`-by-`3` cell array containing the name, programmatic identifier (ProgID), and file name for the control. Each control has one row, which MATLAB software sorts by file name.

COM functions are available on Microsoft Windows systems only.

Examples

Show information for two controls:

```
list = actxcontrollist;
for k = 1:2
  sprintf(' Name = %s\n ProgID = %s\n File = %s\n', list{k,:})
end

ans =
  Name = Calendar Control 11.0
  ProgID = MSCAL.Calendar.7
  File = C:\Program Files\MSOffice\OFFICE11\MSCAL.OCX

ans =
  Name = CTreeView Control
  ProgID = CTREEVIEW.CTreeViewCtrl.1
  File = C:\WINNT\system32\dmocx.dll
```

MATLAB displays controls specific to your system.

See Also

`actxcontrolselect` | `actxcontrol`

Topics

Introduced before R2006a

actxcontrolselect

Create Microsoft ActiveX control from UI

Syntax

```
h = actxcontrolselect
[h, info] = actxcontrolselect
```

Description

`h = actxcontrolselect` displays a UI listing all ActiveX controls installed on the system and creates the one you select from the list. Returns handle `h` for the object. Use the handle to identify this control when calling MATLAB COM functions.

`[h, info] = actxcontrolselect` returns a `1`-by-`3` cell array `info` containing the name, programmatic identifier (ProgID), and file name for the control.

COM functions are available on Microsoft Windows systems only.

See Also

`actxcontrollist` | `actxcontrol`

Topics

"Creating Control Objects Using a UI"

Introduced before R2006a

actxGetRunningServer

Handle to running instance of Automation server

Syntax

```
h = actxGetRunningServer('progid')
```

Description

`h = actxGetRunningServer('progid')` gets a reference to a running instance of the OLE Automation server. `progid` is the programmatic identifier of the Automation server object and `h` is the handle to the default interface of the server object.

The function returns an error if the server specified by `progid` is not currently running or if the server object is not registered. When multiple instances of the Automation server are running, the operating system controls the behavior of this function.

COM functions are available on Microsoft Windows systems only.

Examples

Get a handle to the Microsoft Excel® program:

```
h = actxGetRunningServer('Excel.Application')
```

See Also

`actxcontrol` | `actxserver`

Topics

"MATLAB COM Automation Server Interface"

Introduced in R2007a

actxserver

Create COM server

Syntax

```
h = actxserver('progid')
h = actxserver('progid','machine','machineName')
h = actxserver('progid','interface','interfaceName')
h =
actxserver('progid','machine','machineName','interface','interfaceName')
h = actxserver('progid',machine)
```

Description

`h = actxserver('progid')` creates a local OLE Automation server, where `progid` is the programmatic identifier of an OLE-compliant COM server. Returns `h`, a handle to the default interface of the server.

Get `progid` from the control or server vendor documentation. To see the `progid` values for MATLAB software, refer to "Programmatic Identifiers".

`h = actxserver('progid','machine','machineName')` creates an OLE Automation server on a remote machine, where `machineName` is a character vector specifying the name of the machine on which to start the server.

`h = actxserver('progid','interface','interfaceName')` creates a Custom interface server, where `interfaceName` is a character vector specifying the interface name of the COM object. Values for `interfaceName` are

- `IUnknown` — Use the IUnknown interface. MATLAB does not support the IUnknown interface with 64-bit MATLAB.
- The Custom interface name

To use the `interfaceName` value, you must know the name of the interface and have the server vendor documentation. For information about custom COM servers and interfaces, see "COM Server Types".

Note: The MATLAB COM Interface does not support invoking functions with optional parameters.

`h = actxserver('progid','machine','machineName','interface','interfaceName')` creates a Custom interface server on a remote machine.

Note: The following syntax is not recommended. Use the previous syntaxes instead.

`h = actxserver('progid',machine)` creates a COM server running on the remote system named by the `machine` argument. `machine` can be an IP address or a DNS name. Use this syntax only in environments that support Distributed Component Object Model (for more information, see "MATLAB Application as DCOM Server").

COM functions are available on Microsoft Windows systems only.

Examples

Create Microsoft Excel Workbook

Create a COM server running Microsoft Excel.

```
e = actxserver('Excel.Application');
```

Make the Excel frame window visible.

```
e.Visible = 1;
```

List the properties of the Excel application.

```
get(e)
```

MATLAB displays the properties for your Excel version.

Create an interface `eWorkBooks`.

```
eWorkbooks = e.Workbooks;
```

List all methods for the workbooks interface.

```
invoke(eWorkbooks)
```

MATLAB displays the methods for your Excel version.

Add a workbook `w`.

```
w = Add(eWorkbooks);
```

Open the Excel frame window. You can manipulate the spreadsheet in the Excel application.

When you are finished with the Excel application, close Excel in MATLAB and delete the server object.

```
Quit(e)
delete(e)
```

Tips

For components implemented in a dynamic link library (DLL), `actxserver` creates an in-process server. For components implemented as an executable (EXE), `actxserver` creates an out-of-process server. Out-of-process servers can be created either on the client system or on any other system on a network that supports DCOM.

If the control implements any Custom interfaces, use the `interfaces` function to list them, and the `invoke` function to get a handle to a selected interface.

You can register events for COM servers.

See Also

See Also

`actxcontrol` | `actxGetRunningServer`

Topics

"Write Data to Excel Spreadsheet Using ActiveX"
"Read Spreadsheet Data Using Excel as Automation Server"

Introduced before R2006a

add

Add single key-value pair to KeyValueStore

Syntax

```
add(KVStore,key,value)
```

Description

`add(KVStore,key,value)` adds a single key-value pair to `KVStore`, which is a `KeyValueStore` created during `mapreduce` execution. Use `add` in a map or reduce function written for use with `mapreduce` to store intermediate or final key-value pair information.

Examples

Add Key/Value Pairs to KeyValueStore

Use `add` in map and reduce functions to pass data into the intermediate and final `KeyValueStore`. This simple example uses identity map and reduce functions that pass the inputs straight through to the output.

```
inds = datastore('airlinesmall.csv','SelectedVariableNames','ArrDelay','TreatAsMissing
preview(inds)
```

```
ans = 8×1 table
    ArrDelay
    ________

     8
     8
    21
    13
     4
    59
     3
```

```
    11
```

```
outds = mapreduce(inds,@myMapper,@myReducer,mapreducer(0));
```

```
********************************
*      MAPREDUCE PROGRESS      *
********************************
Map   0% Reduce   0%

Map  16% Reduce   0%

Map  32% Reduce   0%

Map  48% Reduce   0%

Map  65% Reduce   0%

Map  81% Reduce   0%

Map  97% Reduce   0%

Map 100% Reduce   0%

Map 100% Reduce 100%
```

```
readall(outds)
```

```
ans = 1×2 table
       Key                Value
    __________    _________________

    'ArrDelay'    [123523×1 double]
```

```
function myMapper(data,info,intermKV)
    add(intermKV, 'ArrDelay',data.ArrDelay);
end

function myReducer(key,intermValIter,outKV)
    data = getnext(intermValIter);
    while hasnext(intermValIter)
        data = [data; getnext(intermValIter)];
    end
    add(outKV,key,data);
end
```

Input Arguments

KVStore — Key-value pair storage object

KeyValueStore object

Key-value pair storage object, specified as a KeyValueStore object. The mapreduce function automatically creates the KeyValueStore object during execution:

- In the map function, the name of the intermediate KeyValueStore object is the third input argument to the map function, myMapper(data, info, intermKVStore). Use that same variable name to add intermediate key-value pairs with add or addmulti in the map function.
- In the reduce function, the name of the final KeyValueStore object is the third input argument to the reduce function, myReducer(intermKey, intermValIter, outKVStore). Use that same variable name to add final key-value pairs with add or addmulti in the reduce function.

For more information, see KeyValueStore.

key — Key

numeric scalar | character vector

Key, specified as a numeric scalar or character vector.

All of the keys added by the map function must have the same class. The keys added by the reduce function also must have the same class, but that class can differ from the class of the keys added by the map function.

Numeric keys cannot be NaN, complex, logical, or sparse.

Example: add(intermKVStore,'Sum',sum(X)) adds a key-value pair to an intermediate KeyValueStore object (named intermKVStore) in a map function.

Example: add(outKVStore,'Stats',[mean(X) max(X) min(X) var(X) std(X)]) adds a key-value pair to a final KeyValueStore object (named outKVStore) in a reduce function.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | char

`value` — Value
any MATLAB object

Value, specified as any MATLAB object. This includes all valid MATLAB data types.

The `OutputType` argument of `mapreduce` affects the type of values that the reduce function can add:

- If the `OutputType` is `'Binary'` (the default), then a value added by the reduce function can be any MATLAB object.
- If the `OutputType` is `'TabularText'`, then a value added by the reduce function can be a numeric scalar or character vector when using the `add` function. Additionally, you can use the `addmulti` function to add multiple values with a numeric vector, cell vector of character vectors, or cell vector of numeric scalars. In each case, the numeric values cannot be `NaN`, complex, logical, or sparse.

Note: The above key-value pair requirements may differ when using other products with mapreduce. See the documentation for the appropriate product to get product-specific key-value pair requirements.

Example: `add(intermKVStore,'Sum',sum(X))` specifies a single scalar value to pair with a key.

Example: `add(outKVStore,'Stats',[mean(X) max(X) min(X) var(X) std(X)])` specifies a numeric array as the value to pair with a key.

Tips

- Avoid using `add` in a loop, as it can negatively affect `mapreduce` execution time. Instead, use cell arrays to collect multiple values (using vectorized operations if possible) and use a single call to `addmulti`.

See Also

See Also

`addmulti`

Topics

KeyValueStore
"Build Effective Algorithms with MapReduce"

Introduced in R2014b

matlab.apputil.create

Create or modify app project file for packaging app into `.mlappinstall` file using interactive dialog box

Syntax

```
matlab.apputil.create
matlab.apputil.create(prjfile)
```

Description

`matlab.apputil.create` opens the Package App dialog box that steps you through the process of creating an `.mlappinstall` file.

`matlab.apputil.create(prjfile)` loads the specified `.prj` file and populates the Package App dialog box with the information from the specified project file. Use this option if you need to update an existing app.

Examples

Open Dialog Box for Creating an App Package

```
matlab.apputil.create
```

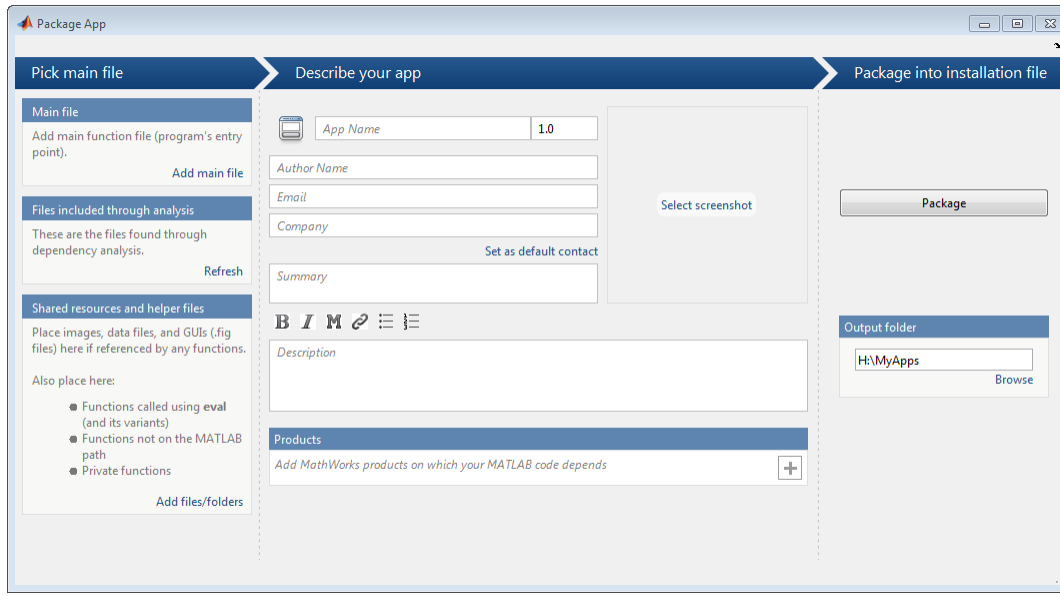

Minimally, add a main file, specify an app name, and indicate the required products. MATLAB creates and continuously saves a `.prj` file, regardless of whether you click **Package**. However, MATLAB does not create a `.mlappinstall` file if you do not click **Package**.

Update Existing App Package

Assume you have an existing project file, `myapp.prj`. You want to add a file and update the description.

Open the Package App dialog box, specifying the previously created `.prj` file:

```
matlab.apputil.create('myapp.prj')
```

The dialog box opens populated with the data you previously specified for `myapp`. Adjust the information in the dialog box, as needed.

Input Arguments

`prjfile` — Full or partial path to the `.prj` file

character vector | string scalar

Full or partial path to the `.prj` file you created previously with the Package App dialog box, specified as a character vector or string scalar.

Example: `'C:\myapp.prj'`

Example: `"C:\myapp.prj"`

See Also

See Also

`matlab.apputil.package`

Topics

"MATLAB App Installer File — mlappinstall"

Introduced in R2012b

matlab.apputil.getInstalledAppInfo

List installed app information

Syntax

```
matlab.apputil.getInstalledAppInfo
```

```
appinfo = matlab.apputil.getInstalledAppInfo
```

Description

`matlab.apputil.getInstalledAppInfo` displays the ID and name of all installed custom apps. It does not display this information for apps packaged with MathWorks® products.

`appinfo = matlab.apputil.getInstalledAppInfo` returns structure to `appinfo`, which includes the status, ID, location, and name of all installed custom apps. It does not return this information for apps packaged with MathWorks products.

Examples

Display Installed Apps Information in the Command Window

Assume you installed two apps, `LinePlotter` and `PlotRandNumbers`. Display the app information in the Command Window.

```
matlab.apputil.getInstalledAppInfo
```

```
ID                     Name
------------------     ---------------
LinePlotterAPP         LinePlotter
PlotRandNumbersAPP     PlotRandNumbers
```

Store Installed App Information in a Variable

Assume you installed an app, `ColorPalette`. Get the app information and store it in a variable, `myappinfo`.

```
myappinfo = matlab.apputil.getInstalledAppInfo;
```

Store Installed App Information in a Variable and Display IDs

Assume you installed two apps, `LinePlotter` and `PlotRandNumbers`. Get and store the app information for both installed apps in a variable, `myappinfo`. Then, get the `id` for each app.

```
myappinfo = matlab.apputil.getInstalledAppInfo
```

```
myappinfo =

1x2 struct array with fields:
    id
    name
    status
    location
```

Get the id of each installed app:

```
appids={myappinfo.id}
```

```
appids =

    'LinePlotterAPP'    'PlotRandNumbersAPP'
```

Output Arguments

`appinfo` — Information about installed apps

structure array

Information about the installed app, returned as a structure array, with one element for each installed app. Each element of the structure array has the following fields:

`status` — Installation status

`'installed'`

Status of the installation, returned as `'installed'`.

`id` — Unique identifier for the installed app

character vector

Unique identifier for the installed app, returned as a character vector.

The ID is for use when running or uninstalling the app programmatically.

`location` — Folder where the app is installed
character vector

Folder where the app is installed, returned as a character vector.

`name` — Name of the installed app
character vector

Name of the installed app as it appears in the apps gallery, returned as a character vector.

See Also

See Also

`matlab.apputil.install` | `matlab.apputil.run` | `matlab.apputil.uninstall`

Topics

"MATLAB App Installer File — mlappinstall"

Introduced in R2012b

matlab.apputil.install

Install app from a `.mlappinstall` file

Syntax

```
appinfo = matlab.apputil.install(appfile)
```

Description

`appinfo = matlab.apputil.install(appfile)` installs the specified app file and returns information about the app.

Examples

Install App and Display Information About the Installation

Assume you have downloaded an app from File Exchange named `EmployeeData`. Install it and return information about the installation to the variable `appinfo`. Later, if you decide to deinstall the app programmatically, you have the app id required to do so.

```
appinfo = matlab.apputil.install...
   ('C:\myguis\myapps\EmployeeData.mlappinstall')
```

```
appinfo =

          id: 'EmployeeDataApp'
        name: 'EmployeeData'
      status: 'installed'
    location: 'C:\myguis\myapps\EmployeeData.mlappinstall'
```

Input Arguments

`appfile` — Full or partial path to `.mlappinstall` file
character vector | string scalar

Full or partial path of the app file you want to install, specified as a character vector or string scalar.

Example: `'C:\myguis\myapps\myapp.mlappinstall'`

Example: `"C:\myguis\myapps\myapp.mlappinstall"`

Output Arguments

`appinfo` — Information about installed app
structure

Information about the installed app, returned as a structure with the fields:

`status` — Installation status
`'installed'` | `'updated'`

Installation status, returned as one of the following:

- `'installed'` — New app is installed.
- `'updated'` — Previously installed app is updated.

`id` — Unique identifier
character vector

Unique identifier for the installed app, returned as a character vector.

The ID is for use when running or uninstalling the app programmatically.

`location` — Folder where app is installed
character vector

Folder where app is installed, returned as a character vector.

`name` — Name of installed app
character vector

Name of installed app as it appears in the apps gallery, returned as a character vector.

See Also

See Also

`matlab.apputil.getInstalledAppInfo` | `matlab.apputil.package` | `matlab.apputil.uninstall`

Topics

"MATLAB App Installer File — mlappinstall"

Introduced in R2012b

matlab.apputil.package

Package app files into `.mlappinstall` file

Syntax

```
matlab.apputil.package(prjfile)
```

Description

`matlab.apputil.package(prjfile)` creates a `.mlappinstall` file based on the information in the specified `prjfile`.

Examples

Create mlappinstall File for Previously Created Project File

Assume you previously created `myprjfile.prj` using `matlab.apputil.create`. The following command creates the corresponding `.mlappinstall` file.

```
matlab.apputil.package('myprjfile.prj')
```

Input Arguments

`prjfile` — Full or partial path to app project (`.prj`) file

character vector | string scalar

Full or partial path to app project (`.prj`) file, specified as a character vector or string scalar.

Example: `'plotdata.prj'`

Example: `"plotdata.prj"`

Tips

- To create a `.prj` file, use `matlab.apputil.create`.

See Also

See Also

`matlab.apputil.create` | `matlab.apputil.install` | `matlab.apputil.run`

Introduced in R2012b

matlab.apputil.run

Run app programmatically

Syntax

```
matlab.apputil.run(appid)
```

Description

`matlab.apputil.run(appid)` runs the custom app specified by the unique identifier, `appid`.

Examples

Run Previously Installed App

Assume you installed two apps, `PlotData` and `setslider`. Run `PlotData` programmatically, using its ID.

Get IDs of all installed apps.

```
matlab.apputil.getInstalledAppInfo
```

```
ID                      Name
-------------------     ----------------
setsliderAPP            setslider
PlotDataAPP             PlotData
```

Run `PlotData`.

```
matlab.apputil.run('PlotDataAPP')
```

Input Arguments

`appid` — ID of custom app
character vector | string scalar

ID of custom app you want to run, specified as a character vector or string scalar.

Example: `'DataExplorationAPP'`

Example: `"DataExplorationAPP"`

Tips

- The ID of a custom app is returned when you install it. You can use `matlab.apputil.getInstalledAppInfo` to get the ID after you have installed an app.
- When a custom app runs, MATLAB adds any folders it needs to have added to the path, as identified when the app was packaged. When the app exits, MATLAB removes those folders from the path.
- You can run multiple, different custom apps concurrently. However, you cannot run two instances of the same app concurrently.

See Also

See Also

`matlab.apputil.create` | `matlab.apputil.getInstalledAppInfo` | `matlab.apputil.install`

Introduced in R2012b

matlab.apputil.uninstall

Uninstall app

Syntax

```
matlab.apputil.uninstall(appid)
```

Description

`matlab.apputil.uninstall(appid)` removes the app specified by the unique identifier, `appid`. MATLAB removes all files corresponding to the app and removes the app from the app gallery.

Examples

Uninstall App

Assume you previously installed two apps, `setslider` and `simplegui`. Get the IDs of all installed apps, and then use the ID for `simplegui` to uninstall it.

View the IDs of all apps

```
matlab.apputil.getInstalledAppInfo
```

```
ID                      Name
--------------------    ----------------
setsliderAPP            setslider
simpleguiAPP            simplegui
```

Uninstall the `simplegui` app.

```
matlab.apputil.uninstall('simpleguiAPP')
```

Confirm the app was removed, by running `matlab.apputil.getInstalledAppInfo` again.

```
matlab.apputil.getInstalledAppInfo
```

```
ID                      Name
-------------------     ----------------
setsliderAPP            setslider
```

Input Arguments

appid — ID of app

character vector | string scalar

ID of app to be uninstalled, specified as a character vector or string scalar.

Example: `'DataExplorationAPP'`

Example: `"DataExplorationAPP"`

Tips

- To determine the appid of an installed app, preserve the value returned when you install the app programmatically with `matlab.apputil.install`, or use `matlab.apputil.getInstalledAppInfo`.

See Also

See Also

`matlab.apputil.getInstalledAppInfo` | `matlab.apputil.install`

Introduced in R2012b

addevent

Add event to `timeseries` object

Syntax

```
ts = addevent(ts,e)
ts = addevent(ts,Name,Time)
```

Description

`ts = addevent(ts,e)` adds one or more `tsdata.event` objects, `e`, to the `timeseries` object `ts`. `e` is either a single `tsdata.event` object or an array of `tsdata.event` objects.

`ts = addevent(ts,Name,Time)` constructs one or more `tsdata.event` objects and adds them to the `Events` property of `ts`. `Name` is a cell array of event name strings. `Time` is a cell array of event times.

Examples

Create a time-series object and add an event to this object.

```
%% Import the sample data
load count.dat

%% Create time-series object
count1=timeseries(count(:,1),1:24,'name', 'data');

%% Modify the time units to be 'hours' ('seconds' is default)
count1.TimeInfo.Units = 'hours';

%% Construct and add the first event at 8 AM
e1 = tsdata.event('AMCommute',8);

%% Specify the time units of the time
e1.Units = 'hours';
```

View the properties (`EventData`, `Name`, `Time`, `Units`, and `StartDate`) of the event object.

```
get(e1)
```

MATLAB software responds with

```
    EventData: []
         Name: 'AMCommute'
         Time: 8
        Units: 'hours'
    StartDate: ''
%% Add the event to count1
count1 = addevent(count1,e1);
```

An alternative syntax for adding two events to the time series `count1` is as follows:

```
count1 = addevent(count1,{'AMCommute' 'PMCommute'},{8 18})
```

See Also

timeseries | `tsdata.event`

Introduced before R2006a

addmulti

Add multiple key-value pairs to KeyValueStore

Syntax

```
addmulti(KVStore,keys,values)
```

Description

`addmulti(KVStore,keys,values)` adds multiple key-value pairs to `KVStore`, which is a `KeyValueStore` created during `mapreduce` execution. Use `addmulti` in a map or reduce function written for use with `mapreduce` to store intermediate or final key-value pair information.

Examples

Add Multiple Key/Value Pairs to KeyValueStore

Use `add` and `addmulti` in map and reduce functions to pass data into the intermediate and final `KeyValueStore`. This simple example uses identity map and reduce functions that pass the inputs straight through to the output.

```
inds = datastore('airlinesmall.csv','SelectedVariableNames',...
    {'ArrDelay','DepDelay'},'TreatAsMissing','NA');
preview(inds)
```

```
ans = 8×2 table
    ArrDelay    DepDelay
    ________    ________

     8           12
     8            1
    21           20
    13           12
     4           -1
    59           63
```

```
     3           -2
    11           -1
```

```
outds = mapreduce(inds,@myMapper,@myReducer,mapreducer(0));
```

```
********************************
*      MAPREDUCE PROGRESS      *
********************************
Map   0% Reduce   0%

Map  16% Reduce   0%

Map  32% Reduce   0%

Map  48% Reduce   0%

Map  65% Reduce   0%

Map  81% Reduce   0%

Map  97% Reduce   0%

Map 100% Reduce   0%

Map 100% Reduce  50%

Map 100% Reduce 100%
```

```
readall(outds)
```

```
ans = 2×2 table
       Key                Value
    __________    __________________

    'ArrDelay'    [123523×1 double]
    'DepDelay'    [123523×1 double]
```

```
function myMapper(data,info,intermKV)
    addmulti(intermKV,{'ArrDelay' 'DepDelay'},{data.ArrDelay data.DepDelay});
end

function myReducer(key,intermValIter,outKV)
    data = getnext(intermValIter);
    while hasnext(intermValIter)
        data = [data; getnext(intermValIter)];
```

```
    end
    add(outKV,key,data);
end
```

Input Arguments

KVStore — Key-value pair storage object

KeyValueStore object

Key-value pair storage object, specified as a KeyValueStore object. The mapreduce function automatically creates the KeyValueStore object during execution:

- In the map function, the name of the intermediate KeyValueStore object is the third input argument to the map function, myMapper(data, info, intermKVStore). Use that same variable name to add intermediate key-value pairs with add or addmulti in the map function.
- In the reduce function, the name of the final KeyValueStore object is the third input argument to the reduce function, myReducer(intermKey, intermValIter, outKVStore). Use that same variable name to add final key-value pairs with add or addmulti in the reduce function.

For more information, see KeyValueStore.

keys — Keys

numeric scalar | numeric vector | character vector | cell vector of character vectors | cell vector of numeric scalars

Keys, specified as a numeric scalar, numeric vector, character vector, cell vector of character vectors, or cell vector of numeric scalars. If the keys are a numeric vector or cell vector, then each entry specifies a different key.

All of the keys added by the map function must have the same class. The keys added by the reduce function must also have the same class, but that class can differ from the class of the keys added by the map function.

Numeric keys cannot be NaN, complex, logical, or sparse.

Example: addmulti(intermKVStore,{'Sum'; 'Count'; 'Variance'},{sum(X); numel(X); var(X)}) adds three key-value pairs to an intermediate KeyValueStore object (named intermKVStore) using a cell vector to specify the keys.

Example: `addmulti(intermKVStore,[1 2 3 4],{sum(X); mean(X); max(X); min(X)})` adds four key-value pairs to an intermediate `KeyValueStore` object using a numeric vector to specify the keys.

Example: `addmulti(outKVStore,'Stats',{[mean(X) max(X) min(X) var(X) std(X)]})` adds a single key-value pair to a final `KeyValueStore` object (named `outKVStore`) using a character vector as the key.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char`

`values` — Values

cell array

Values, specified as a cell array. Each entry in the cell array specifies the value in a key-value pair, so `numel(values)` must be equal to the number of keys. The entries in the cell array can be any MATLAB object, including all valid MATLAB data types.

The `OutputType` argument of `mapreduce` affects the type of values that the reduce function can add:

- If the `OutputType` is `'Binary'` (the default), then a value added by the reduce function can be any MATLAB object.
- If the `OutputType` is `'TabularText'`, then a value added by the reduce function can be a numeric scalar or character vector when using the `add` function. Additionally, you can use the `addmulti` function to add multiple values with a numeric vector, cell vector of character vectors, or cell vector of numeric scalars. In each case, the numeric values cannot be `NaN`, complex, logical, or sparse.

Note: The above key-value pair requirements may differ when using other products with mapreduce. See the documentation for the appropriate product to get product-specific key-value pair requirements.

Example: `addmulti(intermKVStore,{'Sum'; 'Count'; 'Variance'},{sum(X); numel(X); var(X)})` adds three key-value pairs to an intermediate `KeyValueStore` object named `intermKVStore`.

Example: `addmulti(intermKVStore,[1 2 3 4],{sum(X); mean(X); max(X); min(X)})` adds four key-value pairs to an intermediate `KeyValueStore` object using a cell vector.

Example: `addmulti(outKVStore,'Stats',{[mean(X) max(X) min(X) var(X) std(X)]})` adds a single key-value pair to a final `KeyValueStore` object named `outKVStore`.

Example: `addmulti(outKVStore,{'Distance' 'Time'},{table.Distance table.Time})` adds two key-value pairs using variables in a table to specify the values.

Tips

- Avoid using `add` in a loop, as it can negatively affect `mapreduce` execution time. Instead, use cell arrays to collect multiple values (using vectorized operations if possible) and use a single call to `addmulti`.

See Also

See Also

`add`

Topics

KeyValueStore
"Build Effective Algorithms with MapReduce"

Introduced in R2014b

audioinfo

Information about audio file

Syntax

```
info = audioinfo(filename)
```

Description

`info = audioinfo(filename)` returns information about the contents of the audio file specified by `filename`.

Examples

Get Information About Audio File

Create a WAVE file from the example file `handel.mat`, and get information about the file.

Create a WAVE (.wav) file in the current folder.

```
load handel.mat
filename = 'C:\Temp\handel.wav';
audiowrite(filename,y,Fs);
clear y Fs
```

Use `audioinfo` to return information about the WAVE file.

```
info = audioinfo(filename)
```

```
info =

  struct with fields:

             Filename: 'C:\Temp\handel.wav'
    CompressionMethod: 'Uncompressed'
          NumChannels: 1
           SampleRate: 8192
```

```
     TotalSamples: 73113
         Duration: 8.9249
            Title: []
          Comment: []
           Artist: []
    BitsPerSample: 16
```

Input Arguments

`filename` — Name of file

character vector

Name of file, specified as a character vector. If a path is specified, it can be absolute, relative, or partial.

Example: `'myFile.mp3'`

Example: `'../myFile.mp3'`

Example: `'C:\temp\myFile.mp3'`

`audioinfo` supports the following file formats.

Platform Support	File Format
All platforms	WAVE (`.wav`)
	OGG (`.ogg`)
	FLAC (`.flac`)
	AU (`.au`)
	AIFF (`.aiff`, `.aif`)
	AIFC (`.aifc`)
Windows 7 (or later), Macintosh, and Linux®	MP3 (`.mp3`)
	MPEG-4 AAC (`.m4a`, `.mp4`)

On Windows 7 platforms (or later), `audioinfo` might also return information about the contents of any files supported by Windows Media® Foundation.

On Linux platforms, `audioinfo` might also return information about the contents of any files supported by GStreamer.

`audioinfo` can extract audio metadata from MPEG-4 (`.mp4`, `.m4v`) video files on Windows 7 or later, Mac OS X 10.7 Lion or higher, and Linux, and from Windows Media Video (`.wmv`) and AVI (`.avi`) files on Windows 7 (or later) and Linux platforms.

Output Arguments

`info` — Information about audio file

structure

Information about audio file, returned as a structure. `info` can contain the following fields.

Field Name	Description	Data Type
`Filename`	Filename including the absolute path to the file and the file extension.	`character vector`
`CompressionMethod`	Compression method used.	`character vector`
`NumChannels`	Number of audio channels encoded in the audio file.	`double`
`SampleRate`	Sample rate of the audio data in the file, in hertz.	`double`
`TotalSamples`	Total number of audio samples in the file.	`double`
`Duration`	Duration of the file, in seconds.	`double`
`BitsPerSample`	Number of bits per sample encoded in the audio file. Only valid for WAVE (`.wav`) and FLAC (`.flac`) files.	`double`
`BitRate`	Number of kilobits per second (kbit/s) used for compressed audio files. Only valid for MP3 (`.mp3`) and MPEG-4 Audio (`.m4a`, `.mp4`) files.	`double`

Field Name	Description	Data Type
`Title`	Value of `'Title'`, if any.	`character vector`
`Artist`	Value of `'Artist'`, if any.	`character vector`
`Comment`	Value of `'Comment'`, if any.	`character vector`

Note: The `BitRate` property returns the actual bit rate on Mac platforms, and not the encoded bit rate. This means that bit rate values might be lower than specified at the time of the encoding, depending on the source data.

Note: On Mac platforms, `audioinfo` returns metadata from `.m4a` and `.mp4` files only on Mac OS X 10.7 Lion or higher. Previous versions of Mac OS X will not read the `'Title'`, `'Author'`, or `'Comment'` fields.

Limitations

- For MP3 and MPEG-4 AAC audio files on Windows 7 or later and Linux platforms, `audioinfo` might report fewer samples than expected. On Linux platforms, this is due to a limitation in the underlying GStreamer framework.
- On Linux platforms, `audioinfo` interprets single channel data in MPEG-4 AAC files as stereo data.

See Also

See Also

`audioread` | `audiowrite`

Introduced in R2012b

audioread

Read audio file

Syntax

```
[y,Fs] = audioread(filename)
[y,Fs] = audioread(filename,samples)

[y,Fs] = audioread( ___ ,dataType)
```

Description

`[y,Fs] = audioread(filename)` reads data from the file named `filename`, and returns sampled data, `y`, and a sample rate for that data, `Fs`.

`[y,Fs] = audioread(filename,samples)` reads the selected range of audio samples in the file, where `samples` is a vector of the form `[start,finish]`.

`[y,Fs] = audioread( ___ ,dataType)` returns sampled data in the data range corresponding to the `dataType` of `'native'` or `'double'`, and can include any of the input arguments in previous syntaxes.

Examples

Read Complete Audio File

Create a WAVE file from the example file `handel.mat`, and read the file back into MATLAB®.

Create a WAVE (`.wav`) file in the current folder.

```
load handel.mat

filename = 'handel.wav';
audiowrite(filename,y,Fs);
clear y Fs
```

Read the data back into MATLAB using `audioread`.

```
[y,Fs] = audioread('handel.wav');
```

Play the audio.

```
sound(y,Fs);
```

Read Portion of Audio File

Create a FLAC file from the example file `handel.mat`, and then read only the first 2 seconds.

Create a FLAC (`.flac`) file in the current folder.

```
load handel.mat

filename = 'handel.flac';
audiowrite(filename,y,Fs);
```

Read only the first 2 seconds.

```
samples = [1,2*Fs];
clear y Fs
[y,Fs] = audioread(filename,samples);
```

Play the samples.

```
sound(y,Fs);
```

Return Audio in Native Integer Format

Create a `.flac` file, read the first 2 seconds of the file and then return audio in the native integer format.

Create a FLAC (`.flac`) file in the current folder.

```
load handel.mat
filename = 'handel.flac';
audiowrite(filename,y,Fs);
```

Read only the first 2 seconds and specify the data and view the datatype of the sampled data y. The data type of `y` is `double`.

```
samples = [1,2*Fs];
```

```
clear y Fs
[y,Fs] = audioread(filename,samples);
whos y
```

```
  Name          Size              Bytes  Class     Attributes

  y         16384x1             131072  double
```

Request audio data in the native format of the file, and then view the data type of the sampled data `y`. Note the new data type of `y`.

```
[y,Fs] = audioread(filename,'native');
whos y
```

```
  Name          Size              Bytes  Class    Attributes

  y         73113x1             146226  int16
```

Input Arguments

`filename` — Name of file to read

character vector

Name of file to read, specified as a character vector that includes the file extension. If a path is specified, it can be absolute, relative or partial.

Example: `'myFile.mp3'`

Example: `'../myFile.mp3'`

Example: `'C:\temp\myFile.mp3'`

`audioread` supports the following file formats.

Platform Support	File Format
All platforms	WAVE (`.wav`)
	OGG (`.ogg`)
	FLAC (`.flac`)
	AU (`.au`)

Platform Support	File Format
	AIFF (`.aiff`, `.aif`)
	AIFC (`.aifc`)
Windows 7 (or later), Macintosh, and Linux	MP3 (`.mp3`)
	MPEG-4 AAC (`.m4a`, `.mp4`)

On Windows platforms prior to Windows 7, `audioread` does not read WAVE files with MP3 encoded data.

On Windows 7 (or later) platforms, `audioread` might also read any files supported by Windows Media Foundation.

On Linux platforms, `audioread` might also read any files supported by GStreamer.

`audioread` can extract audio from MPEG-4 (`.mp4`, `.m4v`) video files on Windows 7 or later, Macintosh, and Linux, and from Windows Media Video (`.wmv`) and AVI (`.avi`) files on Windows 7 (or later) and Linux platforms.

`samples` — Audio samples to read

`[1,inf]` (default) | two-element vector of positive scalar integers

Audio samples to read, specified as a two-element vector of the form `[start,finish]`, where `start` and `finish` are the first and last samples to read, and are positive scalar integers.

- `start` must be less than or equal to `finish`.
- `start` and `finish` must be less than the number of audio samples in the file,
- You can use `inf` to indicate the last sample in the file.

Note: When reading a portion of some MP3 files on Windows 7 platforms, `audioread` might read a shifted range of samples. This is due to a limitation in the underlying Windows Media Foundation framework.

When reading a portion of MP3 and M4A files on Linux platforms, `audioread` might read a shifted range of samples. This is due to a limitation in the underlying GStreamer framework.

Example: `[1,100]`

Data Types: `double`

`dataType` — Data format of audio data, `y`

`'double'` (default) | `'native'`

Data format of audio data,`y`, specified as one of the following:

`'double'`	Double-precision normalized samples.
`'native'`	Samples in the native format found in the file.

For compressed audio formats, such as MP3 and MPEG-4 AAC that do not store data in integer form, `'native'` defaults to `'single'`.

Output Arguments

`y` — Audio data

matrix

Audio data in the file, returned as an `m`-by-`n` matrix, where `m` is the number of audio samples read and `n` is the number of audio channels in the file.

- If you do not specify `dataType`, or `dataType` is `'double'`, then `y` is of type `double`, and matrix elements are normalized values between −1.0 and 1.0.
- If `dataType` is `'native'`, then `y` can be one of several MATLAB data types, depending on the file format and the `BitsPerSample` value of the input file. Call `audioinfo` to determine the `BitsPerSample` value of the file.

File Format	BitsPerSample	Data Type of y	Data Range of y
WAVE (`.wav`)	8	`uint8`	$0 \le y \le 255$
	16	`int16`	$-32768 \le y \le +32767$
	24	`int32`	$-2^{31} \le y \le 2^{31}-1$
	32	`int32`	$-2^{31} \le y \le 2^{31}-1$
	32	`single`	$-1.0 \le y \le +1.0$
	64	`double`	$-1.0 \le y \le +1.0$
FLAC (`.flac`)	8	`uint8`	$0 \le y \le 255$
	16	`int16`	$-32768 \le y \le +32767$

File Format	BitsPerSample	Data Type of y	Data Range of y
	24	`int32`	-2^31 ≤ y ≤ 2^31–1
MP3 (`.mp3`), MPEG-4 AAC (`.m4a`, `.mp4`), OGG (`.ogg`), and certain compressed WAVE files	N/A	`single`	-1.0 ≤ y ≤ +1.0

Note: Where `y` is `single` or `double` and the `BitsPerSample` is 32 or 64, values in `y` might exceed −1.0 or +1.0.

`Fs` — Sample rate
positive scalar

Sample rate, in hertz, of audio data `y`, returned as a positive scalar.

Limitations

- For MP3, MPEG-4 AAC, and AVI audio files on Windows 7 or later and Linux platforms, `audioread` might read fewer samples than expected. On Windows 7 platforms, this is due to a limitation in the underlying Media Foundation framework. On Linux platforms, this is due to a limitation in the underlying GStreamer framework. If you require sample-accurate reading, work with WAV or FLAC files.
- On Linux platforms, `audioread` reads MPEG-4 AAC files that contain single-channel data as stereo data.

See Also

See Also

`audioinfo` | `audiowrite`

Introduced in R2012b

audiowrite

Write audio file

Syntax

```
audiowrite(filename,y,Fs)
audiowrite(filename,y,Fs,Name,Value)
```

Description

`audiowrite(filename,y,Fs)` writes a matrix of audio data, `y`, with sample rate `Fs` to a file called `filename`. The `filename` input also specifies the output file format. The output data type depends on the output file format and the data type of the audio data, `y`.

`audiowrite(filename,y,Fs,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments.

Examples

Write an Audio File

Create a WAVE file from the example file `handel.mat`, and read the file back into MATLAB®.

Write a WAVE (`.wav`) file in the current folder.

```
load handel.mat

filename = 'handel.wav';
audiowrite(filename,y,Fs);
clear y Fs
```

Read the data back into MATLAB using `audioread`.

```
[y,Fs] = audioread(filename);
```

Listen to the audio.

```
sound(y,Fs);
```

Specify Bits Per Sample and Metadata

Create a FLAC file from the example file `handel.mat` and specify the number of output bits per sample and a comment.

```
load handel.mat

filename = 'handel.flac';
audiowrite(filename,y,Fs,'BitsPerSample',24,...
'Comment','This is my new audio file.');
clear y Fs
```

View information about the new FLAC file by using the `audioinfo` function

```
info = audioinfo(filename) ;
```

The `info` structure contains the following information fields: `Filename`, `CompressionMethod`, `NumChannels`, `SampleRate`, `TotalSamples`, `Duration`, `Title`, `Comment`, `Artist`, and `BitsPerSample`.

Input Arguments

`filename` — Name of file to write

character vector

Name of file to write, or the full path to the file, specified as a character vector that includes the file extension. If a path is specified, it can be absolute or relative. If you do not specify the path, then the destination directory is the current working directory.

`audiowrite` supports the following file formats.

Platform Support	File Format
All platforms	WAVE (`.wav`)
	OGG (`.ogg`)
	FLAC (`.flac`)
Windows and Mac	MPEG-4 AAC (`.m4a`, `.mp4`)

Example: `'myFile.m4a'`

Example: `'../myFile.m4a'`

Example: `'C:\temp\myFile.m4a'`

When writing AAC files on Windows, `audiowrite` pads the front and back of the output signal with extra samples of silence. The Windows AAC encoder also places a very sharp fade-in and fade-out on the audio. This results in audio with an increased number of samples after being written to disk.

y — Audio data to write

matrix

Audio data to write, specified as an `m`-by-`n` matrix, where `m` is the number of audio samples to write and `n` is the number of audio channels to write.

If either `m` or `n` is 1, then `audiowrite` assumes that this dimension specifies the number of audio channels, and the other dimension specifies the number of audio samples.

The maximum number of channels depends on the file format.

File Format	Maximum Number of Channels
WAVE (`.wav`)	256
OGG (`.ogg`)	255
FLAC (`.flac`)	8
MPEG-4 AAC (`.m4a`, `.mp4`)	2

The valid range for the data in `y` depends on the data type of `y`.

Data Type of y	Valid Range for y
`uint8`	$0 \le y \le 255$
`int16`	$-32768 \le y \le +32767$
`int32`	$-2^{31} \le y \le 2^{31}-1$
`single`	$-1.0 \le y \le +1.0$
`double`	$-1.0 \le y \le +1.0$

Data beyond the valid range is clipped.

If `y` is `single` or `double`, then audio data in `y` should be normalized to values in the range −1.0 and 1.0, inclusive.

Data Types: `single` | `double` | `int16` | `int32` | `uint8`

`Fs` — Sample rate
positive scalar

Sample rate, in hertz, of audio data `y`, specified as a positive scalar greater than 0. Values of `Fs` are truncated to integer boundaries. When writing to `.m4a` or `.mp4` files on Windows platforms, `audiowrite` supports only samples rates of 44100 and 48000.

Example: `44100`

Data Types: `double`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Title','Symphony No. 9','Artist','My Orchestra'` instructs `audiowrite` to write an audio file with the title "Symphony No. 9" and the artist information "My Orchestra."

`'BitsPerSample'` — Number of output bits per sample
16 (default) | 8 | 24 | 32 | 64

Number of output bits per sample, specified as the comma-separated pair consisting of `'BitsPerSample'` and a number.

Only available for WAVE (`.wav`) and FLAC (`.flac`) files. For FLAC files, only 8, 16, or 24 bits per sample are supported.

Example: `'BitsPerSample',32`

`'BitRate'` — Kilobits per second (kbit/s)
128 (default) | 64 | 96 | 160 | 192 | 256 | 320

Number of kilobits per second (kbit/s) used for compressed audio files, specified as the comma-separated pair consisting of `'BitRate'` and an integer. Noninteger values are truncated. On Windows 7 or later, the only valid values are 96, 128, 160, and 192.

In general, a larger `BitRate` value results in higher compression quality.

Only available for MPEG-4 (`.m4a`, `.mp4`) files.

Example: `'BitRate',96`

`'Quality'` — Quality setting for the Ogg Vorbis Compressor

75 (default) | value in the range [0 100]

Quality setting for the Ogg Vorbis Compressor, specified as the comma-separated pair consisting of `'Quality'` and a number in the range [0 100], where 0 is lower quality and higher compression, and 100 is higher quality and lower compression.

Only available for OGG (`.ogg`) files.

Example: `'Quality',25`

`'Title'` — Title information

[ ] (default) | character vector

Title information, specified as the comma-separated pair consisting of `'Title'` and a character vector.

`'Artist'` — Artist information

[ ] (default) | character vector

Artist information, specified as the comma-separated pair consisting of `'Artist'` and a character vector.

`'Comment'` — Additional information

[ ] (default) | character vector

Additional information, specified as the comma-separated pair consisting of `'Comment'` and a character vector.

Note: On Mac platforms, `audiowrite` writes metadata to WAVE, OGG, and FLAC files only, and will not write the `'Title'`, `'Author'`, or `'Comment'` fields to MPEG-4 AAC files.

Algorithms

The output data type is determined by the file format, the data type of `y`, and the specified output `BitsPerSample`.

File Formats	Data Type of y	Output BitsPerSample	Output Data Type
WAVE (`.wav`),	`uint8`, `int16`, `int32`, `single`, `double`	8	`uint8`
		16	`int16`
		24	`int32`
	`uint8`, `int16`, `int32`	32	`int32`
	`single`, `double`	32	`single`
	`single`, `double`	64	`double`
FLAC (`.flac`)	`uint8`, `int16`, `int32`, `single`, `double`	8	`int8`
		16	`int16`
		24	`int32`
MPEG-4 (`.m4a`, `.mp4`), OGG (`.ogg`)	`uint8`, `int16`, `int32`, `single`, `double`	N/A	`single`

See Also

See Also

`audioinfo` | `audioread`

Introduced in R2012b

autumn

Autumn colormap array

Syntax

```
c = autumn
c = autumn(m)
```

Description

`c = autumn` returns the autumn colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = autumn(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the autumn colormap.

```
surf(peaks);
colormap('autumn');
```

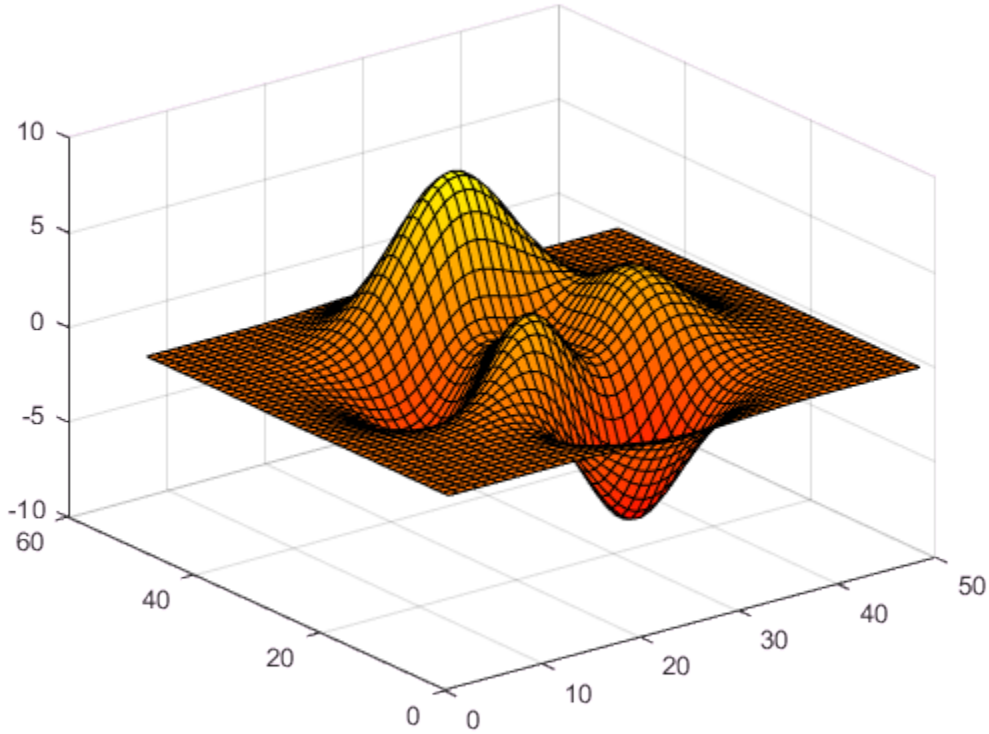

Get the autumn colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = autumn;
c = flipud(c);
colormap(c);
```

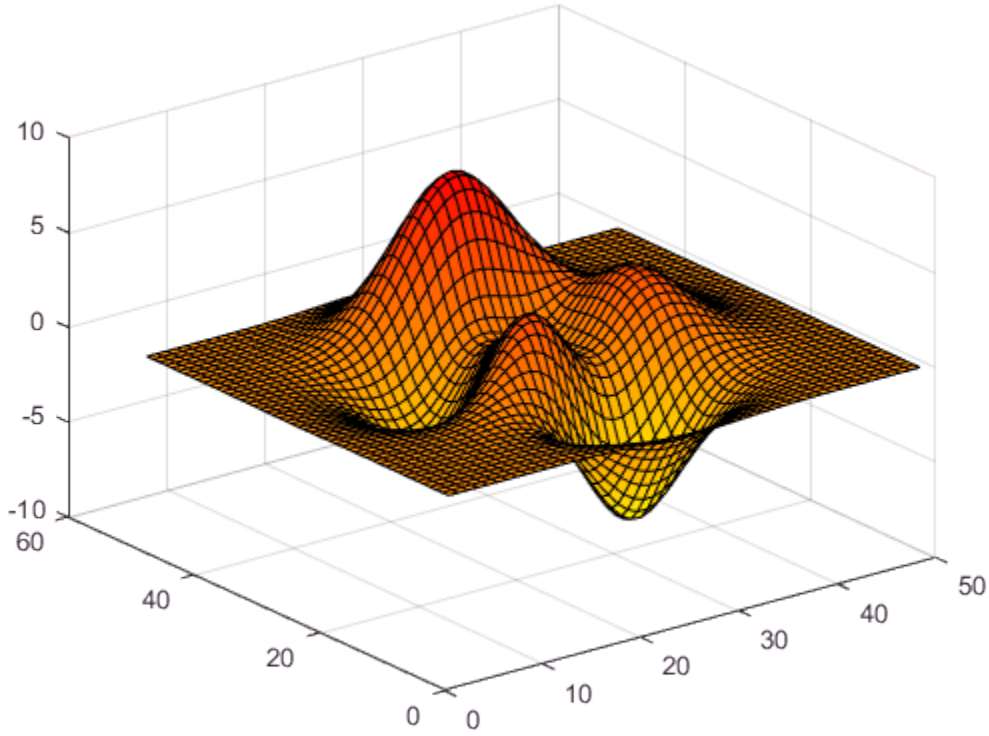

Downsample the Autumn Colormap

Get a downsampled version of the autumn colormap containing only ten colors. Then display the contours of the peaks function by applying the colormap and interpolated shading.

```
c = autumn(10);
surf(peaks);
colormap(c);
shading interp;
```

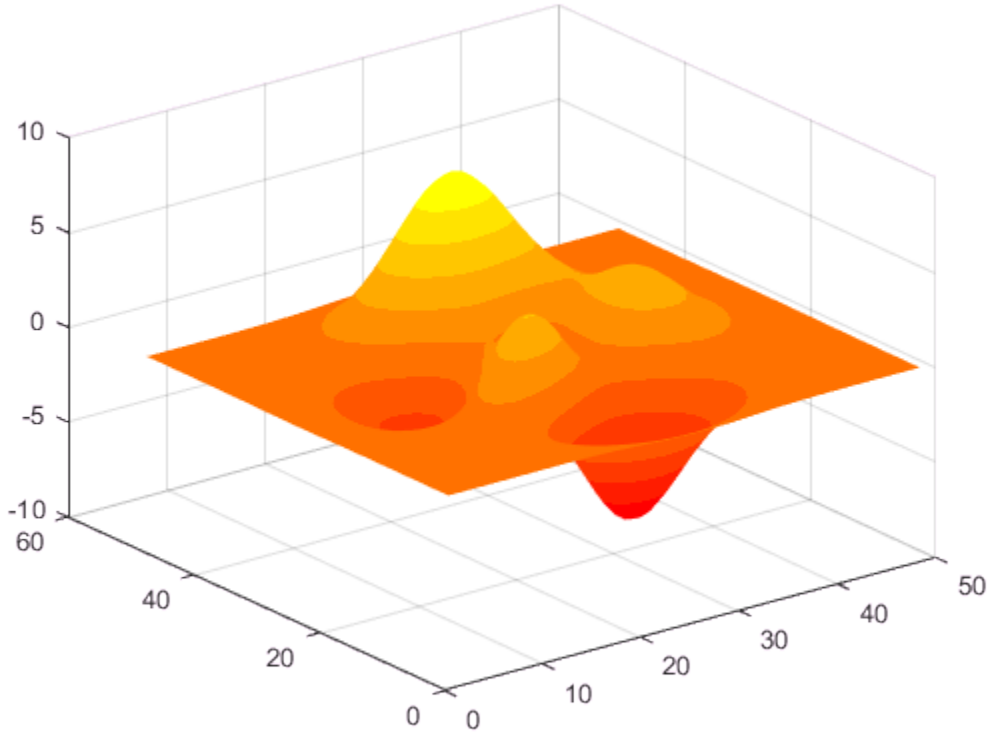

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

addOptional

Class: inputParser

Add optional positional argument to input parser scheme

Syntax

```
addOptional(p,argName,default)
addOptional(p,argName,default,validationFcn)
```

Description

`addOptional(p,argName,default)` adds optional input, `argName`, to the input parser scheme of `inputParser` object, `p`. When the inputs that you are checking do not include a value for this optional input, the input parser assigns the `default` value to the input.

`addOptional(p,argName,default,validationFcn)` specifies a validation function for the input argument.

Input Arguments

p

Object of class inputParser.

argName

String scalar or character vector that specifies the internal name for the input argument.

Arguments added with `addOptional` are positional. When you call a function with positional inputs:

- Specify inputs in the same order that they are added into the input parser scheme.
- Specify a value for the `k`th argument by assigning values for the first `(k–1)` arguments in the input scheme.

default

Default value for the input. This value can be of any data type.

validationFcn

Handle to a function that checks if the input argument is valid.

`inputParser` accepts two types of validation functions: functions that return `true` or `false`, and functions that pass or throw an error. Both types of validation functions must accept a single input argument.

Examples

Add Optional Input

Create an `inputParser` object and add an optional input named `myinput` with a default value of `0` to the input scheme.

```
p = inputParser;
argName = 'myinput';
default = 0;
addOptional(p,argName,default);
```

Validate Optional Input

Check whether an optional input named `num` with a default value of `1` is a numeric scalar greater than zero.

```
p = inputParser;
argName = 'num';
default = 1;
validationFcn = @(x) isnumeric(x) && isscalar(x) && (x > 0);
addOptional(p,argName,default,validationFcn)
```

The syntax `@(x)` creates a handle to an anonymous function with one input.

Attempt to parse an invalid input, such as `-1`:

```
parse(p,-1)
```

```
The value of 'num' is invalid. It must satisfy the function: @(x)isnumeric(x)&&isscalar(x)&&(x>0).
```

Validate Optional Input with `validateattributes`

Create an `inputParser` object and define a validation function using `validateattributes` to test that optional input is numeric, positive, and even. Add the required input to the scheme.

```
p = inputParser;
argName = 'evenPosNum';
default = 1;
validationFcn = @(x) validateattributes(x,{'numeric'},...
    {'even','positive'});
addOptional(p,argName,default,validationFcn)
```

Parse an input character vector. Parse will fail.

```
parse(p,'hello')
```

```
The value of 'evenPosNum' is invalid. Expected input to be one of these types:

double, single, uint8, uint16, uint32, uint64, int8, int16, int32, int64

Instead its type was char.
```

Parse an odd number. Parse will fail.

```
 parse(p,13)
```

```
The value of 'evenPosNum' is invalid. Expected input to be even.
```

Parse an even, positive number. Parse will pass.

```
parse(p,42)
```

Tips

- For optional string inputs, specify a validation function. Without a validation function, the input parser interprets valid string inputs as invalid parameter names and throws an error.
- Use `addOptional` to add an individual argument into the input parser scheme. If you want to parse an optional name-value pair, use `addParameter`.

See Also

See Also

addParameter | addRequired | inputParser | `validateattributes`

Topics

"Create Function Handle"
"Anonymous Functions"

Introduced in R2007a

addParameter

Class: inputParser

Add optional parameter name-value pair argument to input parser scheme

Syntax

```
addParameter(p,paramName,default)
addParameter(p,paramName,default,validationFcn)
addParameter( ___ ,'PartialMatchPriority', matchPriorityValue)
```

Description

`addParameter(p,paramName,default)` adds parameter name and value argument `paramName` to the input parser scheme of `inputParser` object, `p`. When the inputs that you are checking do not include a value for this optional parameter, the input parser assigns the `default` value.

`addParameter(p,paramName,default,validationFcn)` specifies a validation function for the input argument.

`addParameter( ___ ,'PartialMatchPriority', matchPriorityValue)` allows specification of `matchPriorityValue` to indicate priority for matching of conflicting partial parameter names and can include any of the input arguments in the previous syntaxes.

Input Arguments

p

Object of class inputParser.

paramName

String scalar or character vector that specifies the internal name for the input parameter.

Parameter names and values are optional inputs. When calling the function, name and value pairs can appear in any order, with the general form `Name1,Value1,...,NameN,ValueN`.

`default`

Default value for the input. This value can be of any data type.

`matchPriorityValue`

Positive integer value indicating the priority for matching of conflicting partial parameter names. The input parser selects lower priority values over higher ones. If, within an input parser scheme, partial parameter names are ambiguous and have the same priority, `inputParser` will throw an error. If the names are ambiguous, but have different `PartialMatchPriority` values, `inputParser` issues a warning indicating the matched name.

Default: 1

`validationFcn`

Handle to a function that checks if the input argument is valid.

`inputParser` accepts two types of validation functions: functions that return `true` or `false`, and functions that pass or throw an error. Both types of validation functions must accept a single input argument.

Examples

Add Optional Parameter Value Input

Create an `inputParser` object and add an optional input named `myparam` with a default value of `0` to the input scheme.

```
p = inputParser;
paramName = 'myparam';
default = 0;
addParameter(p,paramName,default);
```

Unlike the positional inputs added with the `addRequired` and `addOptional` methods, each parameter added with `addParameter` corresponds to two input arguments: one for the name and one for the value of the parameter.

Pass both the parameter name and value to the `parse` method.

```
parse(p,'myparam',100);
p.Results
```

```
ans = struct with fields:
    myparam: 100
```

Validate Parameter Value

Check whether the value corresponding to `myparam` is a numeric scalar greater than zero.

```
p = inputParser;
paramName = 'myparam';
default = 1;
errorMsg = 'Value must be positive, scalar, and numeric.';
validationFcn = @(x) assert(isnumeric(x) && isscalar(x) ...
    && (x > 0),errorMsg);
addParameter(p,paramName,default,validationFcn)
```

The syntax `@(x)` creates a handle to an anonymous function with one input.

Attempt to parse an invalid value, such as `-1`:

```
parse(p,'myparam',-1)
```

```
The value of 'myparam' is invalid. Value must be positive, scalar, and numeric.
```

Validate Parameter Value Input with `validateattributes`

Create an `inputParser` object and define a validation function using `validateattributes` to test that input parameter `myName` is a nonempty character vector.

```
p = inputParser;
paramName = 'myName';
default = 'John Doe';
validationFcn = @(x) validateattributes(x,{'char'},{'nonempty'});
addParameter(p,paramName,default,validationFcn)
```

Define `myName` as a number. The attempt to parse fails.

```
parse(p,'myName',1138)
```

```
The value of 'myName' is invalid. Expected input to be one of these types:

char

Instead its type was double.
```

Parse a character vector. The attempt to parse passes.

```
parse(p,'myName','George')
```

See Also

See Also

addOptional | addRequired | inputParser | `validateattributes`

Topics

"Create Function Handle"
"Anonymous Functions"

Introduced in R2013b

addParamValue

Class: inputParser

(Not recommended) Add parameter name and value argument to Input Parser scheme

Compatibility

`addParamValue` is not recommended. Use addParameter instead.

Syntax

```
addParamValue(p,paramName,default)
addParamValue(p,paramName,default,validationFcn)
```

Description

`addParamValue(p,paramName,default)` adds parameter name and value argument `paramName` to the input scheme of `inputParser` object `p`. When the inputs that you are checking do not include a value for this optional parameter, the parser assigns the `default` value.

`addParamValue(p,paramName,default,validationFcn)` specifies a validation function for the input argument.

Input Arguments

p

Object of class inputParser.

paramName

String scalar or character vector that specifies the internal name for the input parameter.

Parameter names and values are optional inputs. When calling the function, name and value pairs can appear in any order, with the general form `Name1,Value1,...,NameN,ValueN`.

`default`

Default value for the input. This value can be of any data type.

`validationFcn`

Handle to a function that checks if the input argument is valid.

`inputParser` accepts two types of validation functions: functions that return `true` or `false`, and functions that pass or throw an error. Both types of validation functions must accept a single input argument.

Examples

Add Optional Parameter Value Input

Create an `inputParser` object and add an optional input named `myparam` with a default value of `0` to the input scheme.

```
p = inputParser;
paramName = 'myparam';
default = 0;
addParameter(p,paramName,default);
```

Unlike the positional inputs added with the `addRequired` and `addOptional` methods, each parameter added with `addParameter` corresponds to two input arguments: one for the name and one for the value of the parameter.

Pass both the parameter name and value to the `parse` method.

```
parse(p,'myparam',100);
p.Results
```

```
ans = struct with fields:
    myparam: 100
```

Validate Parameter Value

Check whether the value corresponding to `myparam` is a numeric scalar greater than zero.

```
p = inputParser;
paramName = 'myparam';
default = 1;
validationFcn = @(x) isnumeric(x) && isscalar(x) && (x > 0);
addParamValue(p,paramName,default,validationFcn)
```

The syntax `@(x)` creates a handle to an anonymous function with one input.

Attempt to parse an invalid value, such as `-1`:

```
parse(p,'myparam',-1)
```

```
Argument 'myparam' failed validation @(x)isnumeric(x)&&isscalar(x)&&(x>0).
```

- "Create Function Handle"

Tips

- If your parameter values do not require validation, you do not have to include them in the input scheme with `addParamValue`. As an alternative, set the `KeepUnmatched` property of the `inputParser` object to `true`. The parser stores extra parameter names and values in the `Unmatched` property rather than in the `Results` property of the object. For an example, see the inputParser reference page.

See Also

See Also

addOptional | addParameter | addRequired | inputParser

Topics

"Create Function Handle"
"Anonymous Functions"

Introduced in R2007a

addcats

Add categories to categorical array

Syntax

```
B = addcats(A,newcats)
B = addcats(A,newcats,'Before',beforewhere)
B = addcats(A,newcats,'After',afterwhere)
```

Description

`B = addcats(A,newcats)` adds categories to the end of the category list for the input categorical array, `A`. The output categorical array, `B`, contains the same values as `A`. The output, `B`, does not contain any elements equal to the new categories until you assign values from `newcats` to elements in `B`.

If `A` is an ordinal categorical array, you must specify the `'Before',beforewhere` or `'After',afterwhere` input arguments.

`B = addcats(A,newcats,'Before',beforewhere)` adds categories before the category specified by `beforewhere`.

`B = addcats(A,newcats,'After',afterwhere)` adds categories after the category specified by `afterwhere`.

Examples

Add Categories at End

Create a nonordinal categorical array.

```
A = categorical({'republican' 'democrat' 'republican';...
    'democrat' 'republican' 'democrat'})
```

```
A = 2×3 categorical array
     republican      democrat        republican
     democrat        republican      democrat
```

Display the categories of A.

```
categories(A)
```

```
ans = 2×1 cell array
    'democrat'
    'republican'
```

A is a 2-by-3 categorical array with two categories.

Add the categories, `independent` and `undeclared`, to the end of the category list.

```
B = addcats(A,{'independent' 'undeclared'})
```

```
B = 2×3 categorical array
     republican      democrat        republican
     democrat        republican      democrat
```

B contains the same values as A.

Display the categories of B.

```
categories(B)
```

```
ans = 4×1 cell array
    'democrat'
    'republican'
    'independent'
    'undeclared'
```

B is a 2-by-3 categorical array with four categories.

Add Categories and Specify Category to Precede

Create an ordinal categorical array.

```
A = categorical({'medium' 'large'; 'small' 'xlarge'; 'large' 'medium'},...
    {'small' 'medium' 'large' 'xlarge'},'Ordinal',true)
```

```
A = 3×2 categorical array
```

```
     medium      large
     small       xlarge
     large       medium
```

Display the categories of A.

```
categories(A)
```

```
ans = 4×1 cell array
    'small'
    'medium'
    'large'
    'xlarge'
```

Since A is ordinal, the categories have the mathematical ordering `small < medium < large < xlarge`.

Add the category `xsmall` before `small`.

```
B = addcats(A,'xsmall','Before','small')
```

```
B = 3×2 categorical array
     medium      large
     small       xlarge
     large       medium
```

B contains the same values as A.

Display the categories of B.

```
categories(B)
```

```
ans = 5×1 cell array
    'xsmall'
    'small'
    'medium'
    'large'
    'xlarge'
```

The categories have the mathematical ordering `xsmall < small < medium < large < xlarge`.

Input Arguments

A — Categorical array
vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

newcats — New categories
character vector | cell array of character vectors

New categories, specified as a character vector or a cell array of character vectors.

beforewhere — Category to precede
character vector

Category to precede, specified as a character vector.

afterwhere — Category to follow
character vector

Category to follow, specified as a character vector.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also
`categories` | `iscategory` | `mergecats` | `removecats` | `renamecats` | `reordercats` | `setcats`

Introduced in R2013b

addpath

Add folders to search path

Syntax

```
addpath(folderName1,...,folderNameN)
addpath(folderName1,...,folderNameN,position)

addpath( ___ ,'-frozen')

oldpath = addpath( ___ )
```

Description

`addpath(folderName1,...,folderNameN)` adds the specified folders to the top of the search path for the current MATLAB session.

`addpath(folderName1,...,folderNameN,position)` adds the specified folders to the top or bottom of the search path, as specified by `position`.

`addpath( ___ ,'-frozen')` additionally disables folder change detection for folders being added in Windows. Use this syntax with any of the arguments in previous syntaxes. You can specify `'-frozen'` and position in either order. Use this syntax to conserve Windows change notification resources (Windows only). For more information, type `help changenotification` in the Command Window.

`oldpath = addpath( ___ )` additionally returns the path prior to adding the specified folders.

Examples

Add Folder to Top of Search Path

Create a folder, add it to the top of your search path, and then save the search path for future MATLAB® sessions.

```
mkdir('matlab/myfiles')
addpath('matlab/myfiles')
savepath matlab/myfiles/pathdef.m
```

Add Folder to End of Search Path

Create the folder `matlab/myfiles` and add it to the end of the search path.

```
mkdir('matlab/myfiles')
addpath('matlab/myfiles','-end')
```

Add Folder and Its Subfolders to Search Path

Add `matlab/myfiles` and its subfolders to the search path.

Create the folder `matlab/myfiles` and call `genpath` inside of `addpath` to add all subfolders of `matlab/myfiles` to the search path.

```
mkdir('matlab/myfiles')
addpath(genpath('matlab/myfiles'))
```

Add Folder to Search Path and Disable Folder Change Notification

On Windows®, create the folder `matlab/myfiles`. Then, add it to the top of the search path, disable folder change notification, and return the search path before adding the folder.

```
mkdir('matlab/myfiles')
oldpath = addpath('matlab/myfiles','-frozen');
```

Input Arguments

`folderName1,...,folderNameN` — Folder names to add to search path
character vectors

Folder names to add to the search path, specified as one or more character vectors. Use the full path name for each folder. Use `genpath` with `addpath` to add all subfolders of `folderName`.

Example: `'c:\matlab\work'`

Example: `'/home/user/matlab'`

Example: `'/home/user/matlab','/home/user/matlab/test'`

`position` — Position on search path
`'-begin'` (default) | `'-end'`

Position on the search path, specified as one of the following:

Value of `position`	Description
`'-begin'`	Add specified folders to the top of the search path.
`'-end'`	Add specified folders to the bottom of the search path.

Output Arguments

`oldpath` — Path prior to addition of folders
character vector

Path prior to the addition of folders, returned as a character vector.

Tips

- To save the newly modified search path for future MATLAB sessions, use the `savepath` function. Alternatively, use `addpath` statements in a `startup.m` file to modify the search path programmatically at startup.
- If you use `addpath` within a local function, the path change persists after program control returns from the function. That is, the scope of the path change is global.

See Also

See Also
`genpath` | `path` | `pathsep` | `rmpath` | `savepath`

Topics
"What Is the MATLAB Search Path?"

"Files and Folders that MATLAB Accesses"
"Specify File Names"
"Startup Options in MATLAB Startup File"

Introduced before R2006a

addpref

Add preference

Syntax

```
addpref('group','pref',val)
addpref('group',{'pref1','pref2',...'prefn'},{val1,val2,...valn})
```

Description

`addpref('group','pref',val)` creates the preference specified by `group` and `pref` and sets its value to `val`. It is an error to add a preference that already exists. Individual preference values can be any MATLAB data type, including numeric types, character vectors, cell arrays, structures, and objects.

`group` labels a related collection of preferences. You can choose any name that is a legal variable name, and is descriptive enough to be unique, e.g. `'ApplicationOnePrefs'`. The input argument `pref` identifies an individual preference in that group, and must be a legal variable name.

`addpref('group',{'pref1','pref2',...'prefn'},{val1,val2,...valn})` creates the preferences specified by the cell array of names `'pref1', 'pref2',...,'prefn'`, setting each to the corresponding value.

Note Preference values are persistent and maintain their values between MATLAB sessions. Where they are stored is system dependent.

Examples

Add a preference called `version` to the `mytoolbox` group of preferences, setting its value to the cell array `{'1.0','beta'}`.

```
addpref('mytoolbox','version',{'1.0','beta'})
```

Add a preference called `documentation` to the `mytoolbox` group of preferences, setting its value to a struct you define as having four fields:

```
mydoc.docexists = 1;
mydoc.docpath = fullfile(docroot,'techdoc',...
   'matlab_env','examples');
mydoc.demoexists = 1;
mydoc.demopath = fullfile(docroot,'techdoc',...
   'matlab_env','examples','demo_examples');
addpref('mytoolbox','documentation',mydoc)
% Retrieve the preference with GETPREF
p = getpref('mytoolbox','documentation')

p =
     docexists: 1
       docpath: [1x109 char]
    demoexists: 1
      demopath: [1x123 char]
```

See Also

`getpref` | `ispref` | `rmpref` | `setpref` | `uigetpref` | `uisetpref`

Introduced before R2006a

addpoints

Add points to animated line

Syntax

```
addpoints(h,x,y)
addpoints(h,x,y,z)
```

Description

`addpoints(h,x,y)` adds points defined by `x` and `y` to the animated line specified by `h`. Create an animated line with the `animatedline` function. To display the updates on the screen, use `drawnow` or `drawnow limitrate`. New points automatically connect to previous points. For more information on line animations, see AnimatedLine.

`addpoints(h,x,y,z)` adds points defined by `x`, `y`, and `z` to the 3-D animated line specified by `h`.

Examples

Add Five Points to Animated Line

Create an animated line object with no data. Then, add five points to the line. Use a circle to mark each point.

```
h = animatedline('Marker','o');
x = 1:5;
y = 1:5;
addpoints(h,x,y)
```

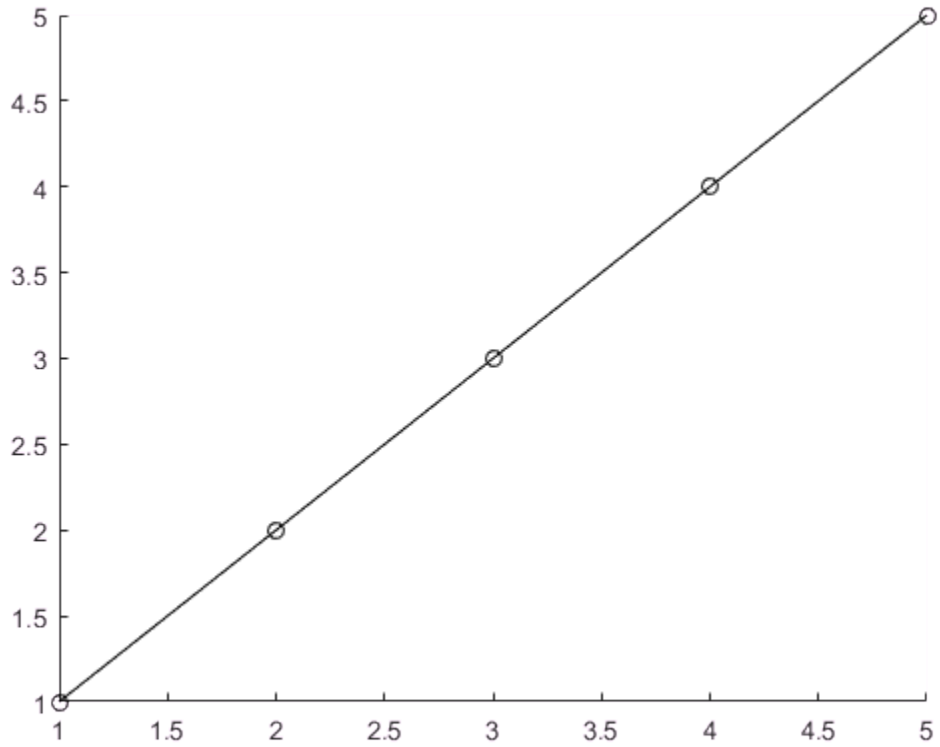

Add Points Within Loop to Animated Line

Create an animated line using the `animatedline` function. Then, add points to the line within a loop to create an animation. Set the axis limits before the loop to prevent the limits from changing.

```
figure
h = animatedline;
axis([0 4*pi -1 1])

for x = linspace(0,4*pi,10000)
    y = sin(x);
    addpoints(h,x,y)
```

```
    drawnow limitrate
end
```

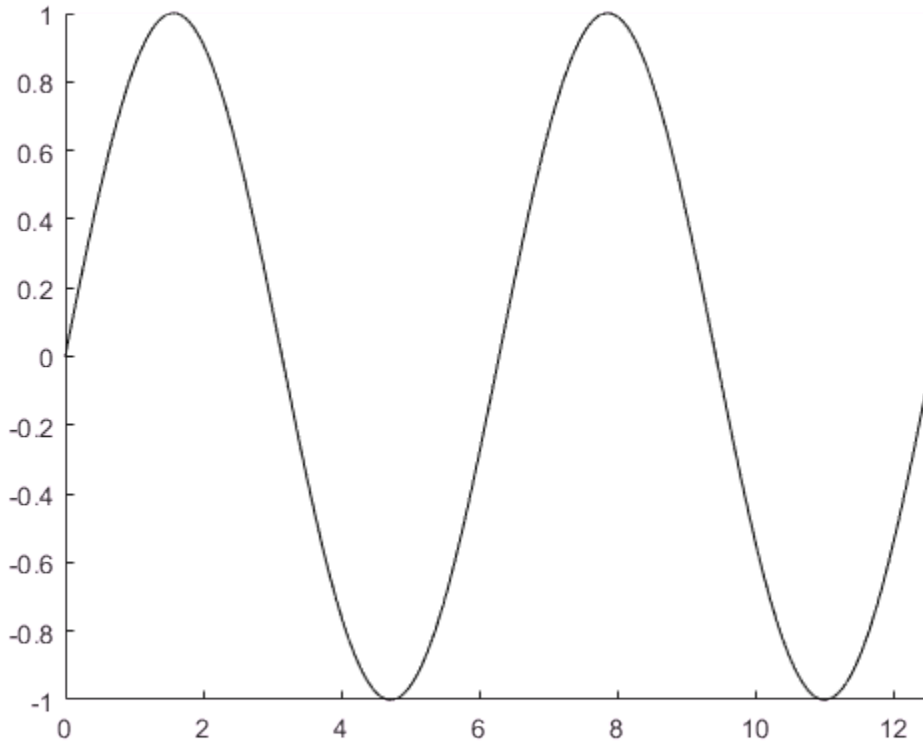

Input Arguments

h — AnimatedLine object
AnimatedLine object

AnimatedLine object. Create an AnimatedLine object using the animatedline function.

x — x values
scalar | vector

x values, specified as a scalar or a vector. The length of `x` must equal the length of `y`.

Example: `11:20`

Data Types: `double`

y — y values
scalar | vector

y values, specified as a scalar or a vector. The length of `y` must equal the length of `x`.

Example: `11:20`

Data Types: `double`

z — z values
scalar | vector

z values, specified as a scalar or a vector. The length of `z` must equal the length of `x` and `y`.

Example: `11:20`

Data Types: `double`

See Also

See Also

Functions
`animatedline` | `clearpoints` | `getpoints`

Using Objects
AnimatedLine

Introduced in R2014b

addprop

Class: dynamicprops

Add dynamic property

Syntax

```
P = addprop(A,PropertyName)
```

Description

`P = addprop(A,PropertyName)` adds a property named `PropName` to each object in array `A`. The output argument `P` is an array of `meta.DynamicProperty` objects that is the same size as `A`.

Dynamic properties exist only on the specific instance for which they are defined. Dynamic properties do not become part of the class definition.

You can add dynamic properties only to objects derived from the `dynamicprops` class. Access the data in dynamic properties using the instance variable and the property name (`obj.PropertyName`).

Input Arguments

A — Input array
object array

Input array, specified as an object array of a class that is derived from `dynamicprops`.

`PropertyName` — Name of dynamic property
`char` vector

Name of dynamic property, specified as a char vector.

Example: `'DynoProp'`

Data Types: `char`

Output Arguments

P — Output array
`meta.DynamicProperty`

Output array returned as an array of `meta.DynamicProperty` objects. Use `meta.DynamicProperty` objects to define access methods for dynamic properties, to set property attributes, and to remove dynamic properties.

Attributes

`Access`	`Public`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Add Dynamic Property

Add a dynamic property to an object of the `Dyno` class.

```
classdef Dyno < dynamicprops
   properties
      Prop1
   end
end
```

Create an object

```
o = Dyno;
```

Add a property called `DynoProp`

```
p = addprop(o,'DynoProp');
```

Set the `AbortSet` attribute of the dynamic property

```
p.AbortSet = 1;
```

Remove the dynamic property

```
delete(p)
```

See Also

See Also

dynamicprops | `meta.DynamicProperty`

Topics

"Dynamic Properties — Adding Properties to an Instance"
"Access Methods for Dynamic Properties"

Introduced in R2008a

addproperty

Add custom property to COM object

Syntax

```
addproperty(h,'name')
```

Description

`addproperty(h,'name')` adds custom property specified by `name` to object or interface `h`.

COM functions are available on Microsoft Windows systems only.

Examples

This example adds a custom property to the MATLAB sample control.

1. Create an instance of the control.

```
f = figure('position',[100 200 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],f);
get(h)
```

```
     Label: 'Label'
    Radius: 20
```

2. Add a custom property named `Position` and assign a value:

```
addproperty(h,'Position')
h.Position = [200 120];
get(h)
```

```
       Label: 'Label'
      Radius: 20
    Position: [200 120]
```

3. Delete the custom property `Position`. MATLAB displays the original list of properties.

```
deleteproperty(h,'Position')
get(h)
```

```
     Label: 'Label'
    Radius: 20
```

See Also

deleteproperty | get (COM) | set (COM) | inspect

Topics

"COM Object Properties"

Introduced before R2006a

addRequired

Class: inputParser

Add required positional argument to input parser scheme

Syntax

```
addRequired(p,argName)
addRequired(p,argName,validationFcn)
```

Description

`addRequired(p,argName)` adds required argument, `argName`, to the input parser scheme of `inputParser` object, `p`.

`addRequired(p,argName,validationFcn)` includes a validation function for the input argument.

Input Arguments

p

Object of class inputParser.

argName

String scalar or character vector that specifies the internal name for the input argument.

Arguments added with `addRequired` are positional. When you call a function with positional inputs, you must specify inputs in the order that they are added to the input parser scheme.

validationFcn

Handle to a function that checks if the input argument is valid.

`inputParser` accepts two types of validation functions: functions that return `true` or `false`, and functions that pass or throw an error. Both types of validation functions must accept a single input argument.

Examples

Add Required Input

Create an `inputParser` object and add a required input named `myinput` to the input scheme.

```
p = inputParser;
argName = 'myinput';
addRequired(p,argName);
```

Validate Required Input

Check whether a required input named `num` is a numeric scalar greater than zero.

```
p = inputParser;
argName = 'num';
validationFcn = @(x) isnumeric(x) && isscalar(x) && (x > 0);
addRequired(p,argName,validationFcn)
```

The syntax `@(x)` creates a handle to an anonymous function with one input.

Attempt to parse an invalid input, such as `-1`:

```
parse(p,-1)
```

```
The value of 'num' is invalid. It must satisfy the function: @(x)isnumeric(x)&&isscalar(x)&&(x>0).
```

Validate Required Input with `validateattributes`

Create an `inputParser` object and define a validation function using `validateattributes` to test that required input is numeric, positive, and even. Add the required input to the scheme.

```
p = inputParser;
argName = 'evenPosNum';
validationFcn = @(x) validateattributes(x,{'numeric'},...
    {'even','positive'});
```

```
addRequired(p,argName,validationFcn)
```

Parse an input character vector. Parse will fail.

```
parse(p,'hello')
```

```
The value of 'evenPosNum' is invalid. Expected input to be one of these types:

double, single, uint8, uint16, uint32, uint64, int8, int16, int32, int64

Instead its type was char.
```

Parse an odd number. Parse will fail.

```
 parse(p,13)
```

```
The value of 'evenPosNum' is invalid. Expected input to be even.
```

Parse an even, positive number. Parse will pass.

```
parse(p,42)
```

See Also

See Also

addOptional | addParameter | inputParser | `validateattributes`

Topics

"Create Function Handle"
"Anonymous Functions"

Introduced in R2007a

addsampletocollection

Add sample to `tscollection` object

Syntax

```
tsc = addsampletocollection(tsc,'time',Time,TS1Name,TS1Data,
TSnName,TSnData)
```

Description

`tsc = addsampletocollection(tsc,'time',Time,TS1Name,TS1Data, TSnName,TSnData)` adds data samples `TSnData` to the collection member `TSnName` in the `tscollection` object `tsc` at one or more `Time` values. Here, `TSnName` is the string that represents the name of a time series in `tsc`, and `TSnData` is an array containing data samples.

Examples

The following example shows how to create a `tscollection` that consists of two `timeseries` objects, where one `timeseries` does not have quality codes and the other does. The final step of the example adds a sample to the `tscollection`.

1. Create two timeseries objects, `ts1` and `ts2`.

   ```
   ts1 = timeseries([1.1 2.9 3.7 4.0 3.0],1:5,...
                   'name','acceleration');
   ts2 = timeseries([3.2 4.2 6.2 8.5 1.1],1:5,...
                   'name','speed');
   ```

2. Define a dictionary of quality codes and descriptions for `ts2`.

   ```
   ts2.QualityInfo.Code = [0 1];
   ts2.QualityInfo.Description = {'bad','good'};
   ```

3. Assign a quality of code of `1`, which is equivalent to `'good'`, to each data value in `ts2`.

   ```
   ts2.Quality = ones(5,1);
   ```

4 Create a time-series collection `tsc`, which includes time series `ts1` and `ts2`.

```
tsc = tscollection({ts1,ts2});
```

5 Add a data sample to the collection `tsc` at `3.5` seconds.

```
tsc = addsampletocollection(tsc,'time',3.5,'acceleration',10,'speed',{5 1});
```

The cell array for the `timeseries` object `'speed'` specifies both the data value 5 and the quality code `1`.

Note If you do not specify a quality code when adding a data sample to a time series that has quality codes, then the lowest quality code is assigned to the new sample by default.

Tips

If you do not specify data samples for a time-series member in tsc, that time-series member will contain missing data at the times given by Time (for numerical time-series data), `NaN` values, or (for logical time-series data) `false` values.

When a time-series member requires `Quality` values, you can specify data quality codes together with the data samples by using the following syntax:

```
tsc = addsampletocollection(tsc,'time',time,TS1Name,...
         ts1cellarray,TS2Name,ts2cellarray,...)
```

Specify data in the first cell array element and `Quality` in the second cell array element.

Note If a time-series member already has `Quality` values but you only provide data samples, `0`s are added to the existing `Quality` array at the times given by `Time`.

See Also

`delsamplefromcollection` | timeseries | `tscollection`

Introduced before R2006a

addtodate

Modify date number by field

Syntax

```
R = addtodate(D, Q, F)
```

Description

`R = addtodate(D, Q, F)` adds quantity `Q` to the indicated date field `F` of a scalar serial date number `D`, returning the updated date number `R`.

The quantity `Q` to be added can be a positive or negative integer. The absolute value of `Q` must be less than or equal to 1e16. The date field `F` must be a 1-by-`N` character array equal to one of the following: `'year'`, `'month'`, `'day'`, `'hour'`, `'minute'`, `'second'`, or `'millisecond'`.

If the addition to the date field causes the field to roll over, the MATLAB software adjusts the next more significant fields accordingly. Adding a negative quantity to the indicated date field rolls back the calendar on the indicated field. If the addition causes the field to roll back, MATLAB adjusts the next less significant fields accordingly.

Examples

Modify the hours, days, and minutes of a given date:

```
t = datenum('07-Apr-2008 23:00:00');
datestr(t)
ans =
   07-Apr-2008 23:00:00

t= addtodate(t, 2, 'hour');
datestr(t)
ans =
   08-Apr-2008 01:00:00
```

```
t= addtodate(t, -7, 'day');
datestr(t)
ans =
   01-Apr-2008 01:00:00

t= addtodate(t, 59, 'minute');
datestr(t)
ans =
   01-Apr-2008 01:59:00
```

Adding 20 days to the given date in late December causes the calendar to roll over to January of the next year:

```
R = addtodate(datenum('12/24/2007 12:45'), 20, 'day');

datestr(R)
ans =
   13-Jan-2008 12:45:00
```

See Also

date | datenum | datestr | datevec

Introduced before R2006a

addts

Add `timeseries` object to `tscollection` object

Syntax

```
tsc = addts(tsc,ts)
tsc = addts(tsc,ts)
tsc = addts(tsc,ts,Name)
tsc = addts(tsc,Data,Name)
```

Description

`tsc = addts(tsc,ts)` adds the `timeseries` object ts to `tscollection` object tsc.

`tsc = addts(tsc,ts)` adds a cell array of `timeseries` objects ts to the `tscollection` tsc.

`tsc = addts(tsc,ts,Name)` adds a cell array of `timeseries` objects ts to `tscollection` tsc. Name is a cell array of strings that gives the names of the `timeseries` objects in `ts`.

`tsc = addts(tsc,Data,Name)` creates a new `timeseries` object from Data with the name Name and adds it to the `tscollection` object tsc. Data is a numerical array and Name is a string.

Examples

The following example shows how to add a time series to a time-series collection:

1. Create two timeseries objects, `ts1` and `ts2`.

   ```
   ts1 = timeseries([1.1 2.9 3.7 4.0 3.0],1:5,...
                    'name','acceleration');
   ts2 = timeseries([3.2 4.2 6.2 8.5 1.1],1:5,...
                    'name','speed');
   ```

2. Create a time-series collection `tsc`, which includes `ts1`.

```
tsc = tscollection(ts1);
```

3 Add `ts2` to the `tsc` collection.

```
tsc = addts(tsc, ts2);
```

4 To view the members of `tsc`, type

```
tsc
```

at the MATLAB prompt. the response is

```
Time Series Collection Object: unnamed

Time vector characteristics

      Start time            1 seconds
      End time              5 seconds

Member Time Series Objects:

      acceleration
      speed
```

The members of `tsc` are listed by name at the bottom: `acceleration` and `speed`. These are the `Name` properties of the `timeseries` objects `ts1` and `ts2`, respectively.

Tips

The `timeseries` objects you add to the collection must have the same time vector as the collection. That is, the time vectors must have the same time values and units.

Suppose that the time vector of a `timeseries` object is associated with calendar dates. When you add this `timeseries` to a collection with a time vector without calendar dates, the time vectors are compared based on the units and the values relative to the `StartDate` property. For more information about properties, see the timeseries reference page.

See Also

`removets` | `tscollection`

Introduced before R2006a

airy

Airy Functions

Syntax

```
W = airy(Z)
W = airy(k,Z)
W = airy(k,Z,scale)
```

Description

`W = airy(Z)` returns the Airy function, *Ai*(*Z*), for each element of *Z*.

`W = airy(k,Z)` returns any of four different Airy functions, depending on the value of `k`, such as the Airy function of the second kind or the first derivative of an Airy function.

`W = airy(k,Z,scale)` scales the resulting Airy function. `airy` applies a specific scaling function to `W` depending on your choice of `k` and `scale`.

Examples

Airy Function of Real-Valued x

Define `x`.

```
x = -10:0.01:1;
```

Calculate *Ai(x)*

```
ai = airy(x);
```

Calculate *Bi(x)* using $k = 2$.

```
bi = airy(2,x);
```

Plot both results together on the same axes.

```
figure
plot(x,ai,'-b',x,bi,'-r')
```

```
axis([-10 1 -0.6 1.4])
xlabel('x')
legend('Ai(x)','Bi(x)','Location','NorthWest')
```

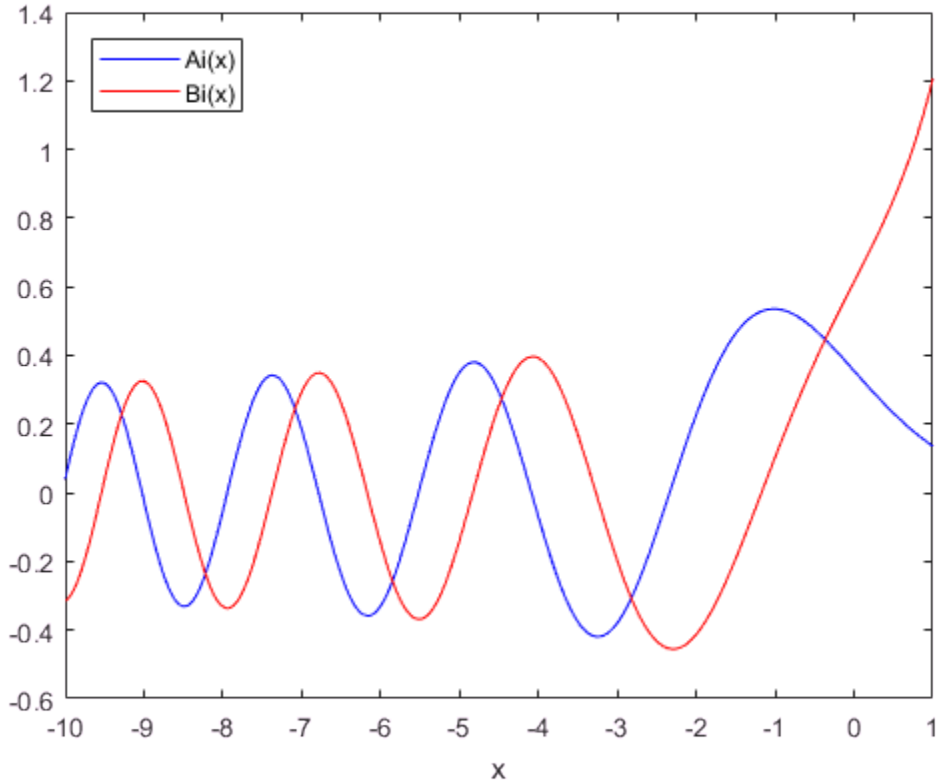

Airy Function of Complex-Valued x

Compute the Airy function at a slice through the complex plane at $x + i$.

Take a slice through the complex plane.

```
x = -4:0.1:4;
z = x+1i;
```

Calculate *Ai(z)*.

```
w = airy(z);
```

Plot the real part of the result.

```
figure
plot(x, real(w))
axis([-4 4 -1.5 1])
xlabel('real(z)')
```

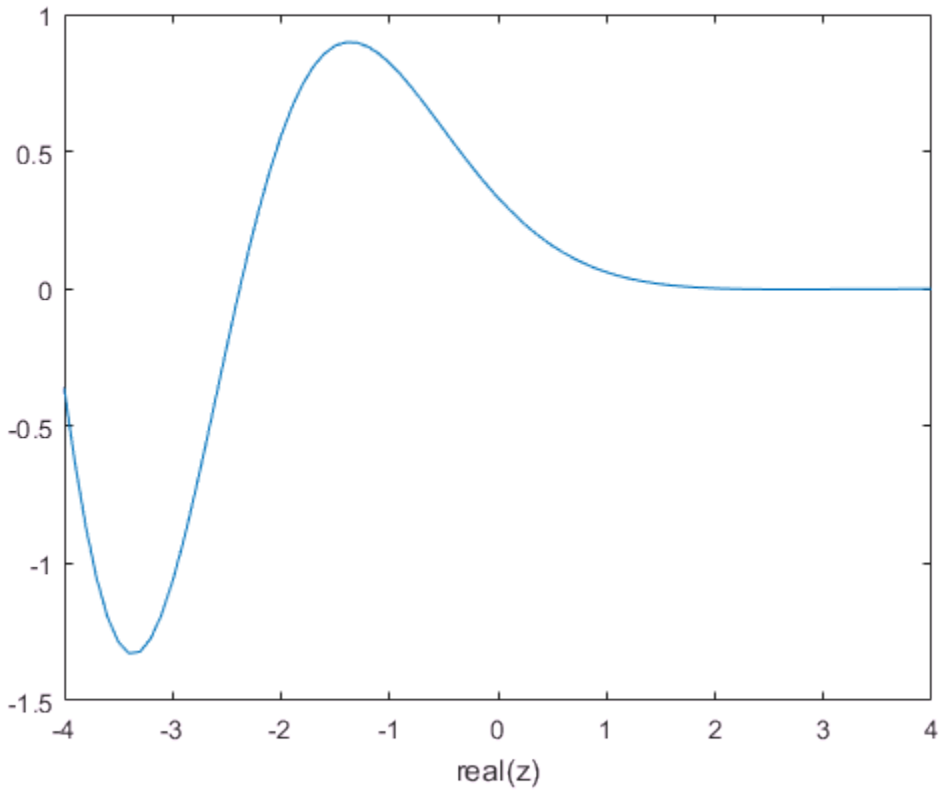

Scaled Airy Function

Define `x`.

```
x = -10:0.01:1;
```

Calculate the scaled and unscaled Airy function.

```
scaledAi = airy(0,x,1);
noscaleAi =  airy(0,x,0);
```

Plot the real part of each result.

```
rscaled = real(scaledAi);
rnoscale = real(noscaleAi);
figure
plot(x,rscaled,'-b',x,rnoscale,'-r')
axis([-10 1 -0.60 0.60])
xlabel('x')
legend('scaled','not scaled','Location','SouthEast')
```

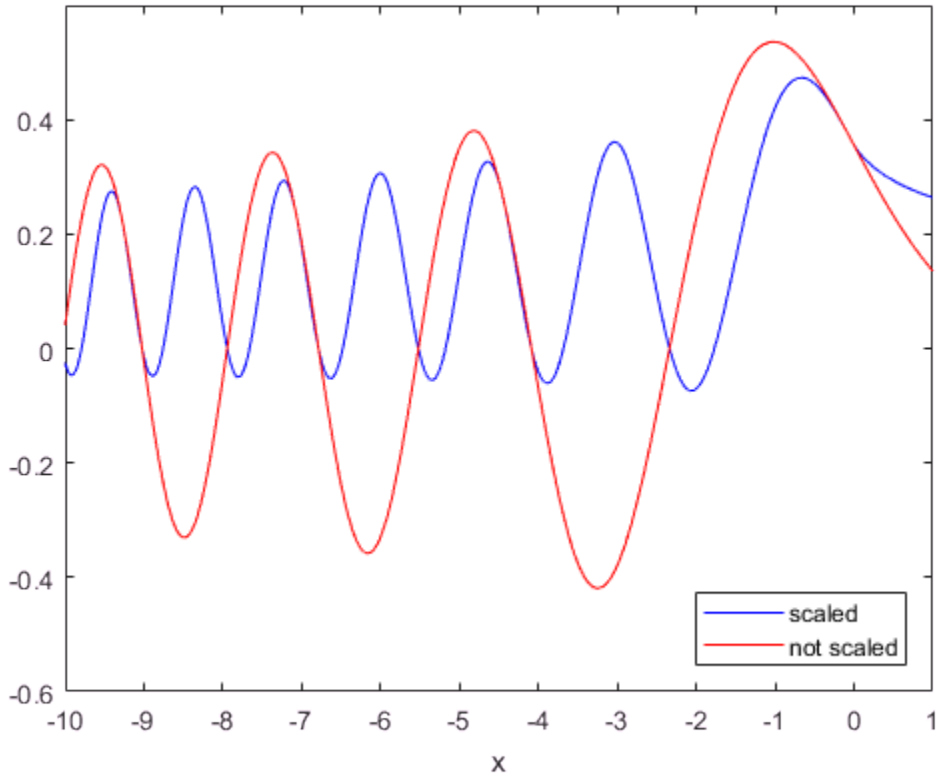

Input Arguments

Z — System variable

vector | matrix | N-D Array

System variable, specified as a real or complex vector, matrix, or N-D array.

Data Types: `single` | `double`
Complex Number Support: Yes

k — Type of Airy function

0 (default) | 1 | 2 | 3

Type of Airy function, specified as one of four values.

k	Returns
0	Airy function, $Ai(Z)$, which is the same as `airy(Z)`.
1	First derivative of Airy function, $Ai'(Z)$.
2	Airy function of the second kind, $Bi(Z)$
3	First derivative of Airy function of the second kind, $Bi'(Z)$

Data Types: `single` | `double`

scale — Scaling option

0 (default) | 1

Scaling option, specified as 0 or 1. Use `scale = 1` to enable the scaling of Z. The values you specify for k and `scale` determine the scaling function `airy` applies to Z.

scale	k	Scaling applied to output
0	Any	None
1	0 or 1	$e^{\frac{2}{3}Z^{(3/2)}}$

scale	k	Scaling applied to output
1	2 or 3	$e^{-\left\lvert \frac{2}{3} Re\left(Z^{(3/2)}\right) \right\rvert}$

Data Types: `single` | `double`

Output Arguments

W — Airy function of Z
vector | matrix | N-D Array

Airy function of Z, returned as an array the same size as Z.

Definitions

Airy Functions

The Airy functions form a pair of linearly independent solutions to

$$\frac{d^2W}{dZ^2} - ZW = 0.$$

The relationship between the Airy and modified Bessel functions is

$$Ai(Z) = \left[\frac{1}{\pi}\sqrt{\frac{Z}{3}}\right] K_{1/3}(\zeta)$$
$$Bi(Z) = \sqrt{\frac{Z}{3}}\left[I_{-1/3}(\zeta) + I_{1/3}(\zeta)\right],$$

where

$$\zeta = \frac{2}{3} Z^{3/2}.$$

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Always returns a complex result.

See Also

See Also

`besselh` | `besseli` | `besselj` | `besselk` | `bessely`

Introduced before R2006a

align

Align UI components and graphics objects

Syntax

```
align(HandleList,'HorizontalAlignment','VerticalAlignment')
Positions = align(HandleList, 'HorizontalAlignment',
'VerticalAlignment')
Positions = align(CurPositions, 'HorizontalAlignment',
'VerticalAlignment')
```

Description

`align(HandleList,'HorizontalAlignment','VerticalAlignment')` aligns the `uicontrol` and `axes` objects in `HandleList`, a vector of handles, according to the options `HorizontalAlignment` and `VerticalAlignment`. The following tables show the possible values for `HorizontalAlignment` and `VerticalAlignment`.

`HorizontalAlignment`	Definition
`'None'`	No horizontal alignment
`'Left'`	Aligns the left edges of the objects with the left edge of the bounding box that encloses the objects
`'Center'`	Shifts objects to center their positions to the average of the extreme *x*-values of the group
`'Right'`	Aligns the right edges of the objects with the right edge of the bounding box that encloses the objects
`'Distribute'`	Equalizes *x*-distances between all objects within the span of the extreme x-values
`'Fixed'`	Spaces objects to have a specified number of points between them in the *x*-direction

`VerticalAlignment`	Definition
`'None'`	No vertical alignment

VerticalAlignment	Definition
'Top'	Aligns the top edges of the objects with the top edge of the bounding box that encloses the objects
'Middle'	Shifts objects to center their positions to the average of the extreme *y*-values of the group
'Bottom'	Aligns the bottom edges of the objects with the bottom edge of the bounding box that encloses the objects
'Distribute'	Equalizes *y*-distances between all objects within the span of the extreme *y*-values
'Fixed'	Spaces objects to have a specified number of points between them in the *y*-direction

Aligning objects does not change their absolute sizes. All alignment options align the objects within the bounding box that encloses the objects. `Distribute` and `Fixed` align objects to the bottom left of the bounding box. `Distribute` evenly distributes the objects while `Fixed` distributes the objects with a fixed distance (in points) between them. When you specify both horizontal and vertical distance together, the keywords `'HorizontalAlignment'` and `'VerticalAlignment'` are not necessary.

If you use `Fixed` for `HorizontalAlignment` or `VerticalAlignment`, you must also specify the distance, in points, where 72 points equals 1 inch. For example:

```
align(HandleList,'Fixed',Distance,'VerticalAlignment')
```

distributes the specified components `Distance` points horizontally and aligns them vertically as specified.

```
align(HandleList,'HorizontalAlignment','Fixed',Distance)
```

aligns the specified components horizontally as specified and distributes them `Distance` points vertically.

```
align(HandleList,'Fixed',HorizontalDistance,...
      'Fixed',VerticalDistance)
```

distributes the specified components `HorizontalDistance` points horizontally and distributes them `VerticalDistance` points vertically.

`Positions = align(HandleList, 'HorizontalAlignment', 'VerticalAlignment')` returns updated positions for the specified objects as a vector of `Position` vectors. The position of the objects on the figure does not change.

`Positions = align(CurPositions, 'HorizontalAlignment', 'VerticalAlignment')` returns updated positions for the objects whose positions are contained in `CurPositions`, where `CurPositions` is a vector of `Position` vectors. The position of the objects on the figure does not change.

Examples

Align a Row of Buttons

Create a UI window containing three buttons that are roughly in a row.

```
f = figure('Position',[100 100 350 200]);
u1 = uicontrol('Parent',f,'Position',[43 50 75 30],'String','Yes');
u2 = uicontrol('Parent',f,'Position',[143 75 75 30],'String','No');
u3 = uicontrol('Parent',f,'Position',[233 40 75 30],'String','Cancel');
```

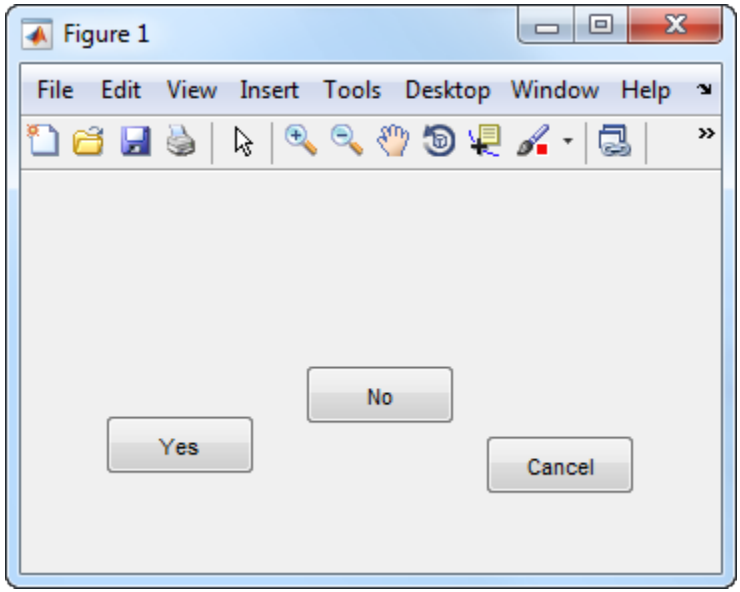

Align the bottom edges of the buttons, and equalize the horizontal spacing between the buttons.

```
align([u1 u2 u3],'distribute','bottom');
```

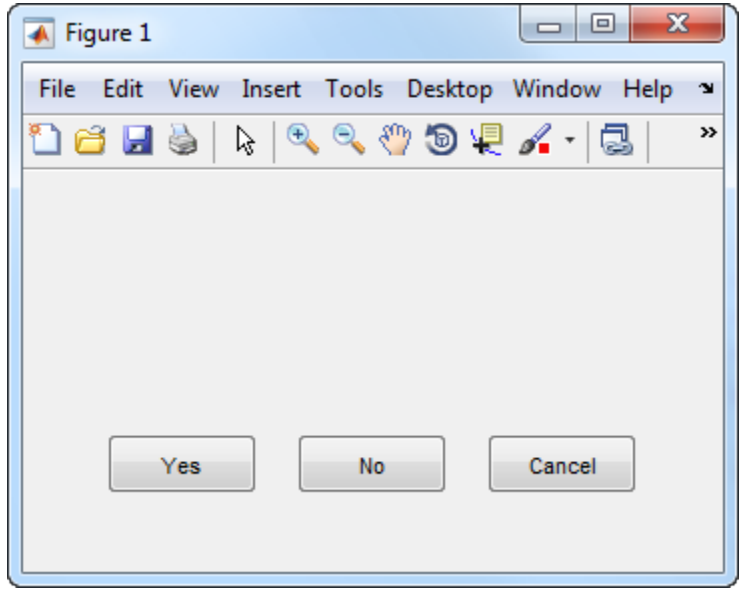

Align a Vertical Stack of Buttons

Create a UI window containing a vertical stack of buttons.

```
f = figure('Position',[100 100 350 200])
u1 = uicontrol(f,'Position',[10 80 60 30],'String','One');
u2 = uicontrol(f,'Position',[50 50 60 30],'String','Two');
u3 = uicontrol(f,'Position',[30 10 60 30],'String','Three');
```

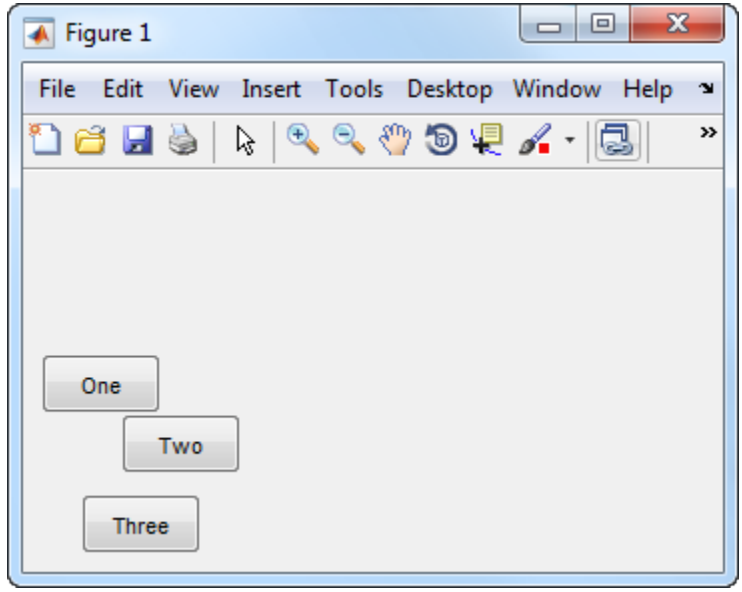

Align the button centers and set the space between buttons to seven points.

```
align([u1 u2 u3],'Center','Fixed',7);
```

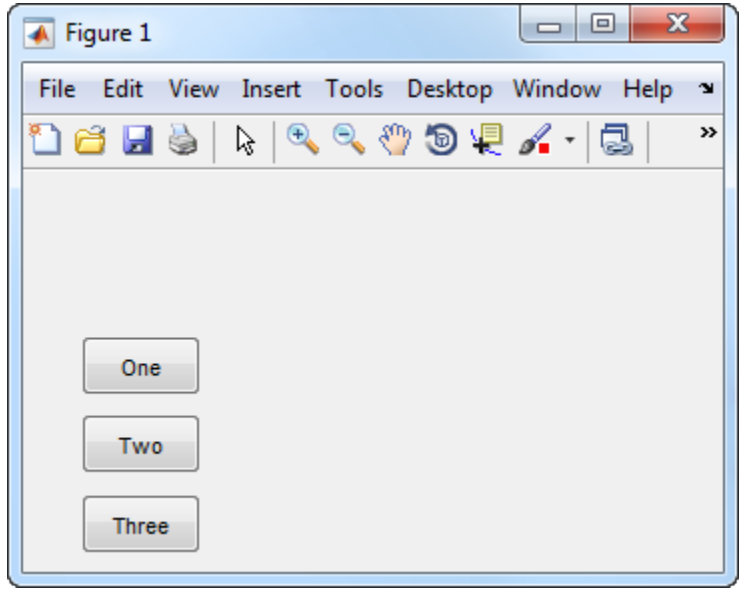

See Also

See Also

`uicontrol` | `uistack`

Topics

"Align Objects in Graph Using Alignment Tools"

alim

Set or query axes alpha limits

Syntax

```
alpha_limits = alim
alim([amin amax])
alim_mode = alim('mode')
alim('alim_mode')
alim(ax,...)
```

Description

`alpha_limits = alim` returns the alpha limits (ALim property) of the current axes.

`alim([amin amax])` sets the alpha limits to the specified values. `amin` is the value of the data mapped to the first alpha value in the alphamap, and `amax` is the value of the data mapped to the last alpha value in the alphamap. Data values in between are linearly interpolated across the alphamap, while data values outside are clamped to either the first or last alphamap value, whichever is closest.

`alim_mode = alim('mode')` returns the alpha limits mode (ALimMode property) of the current axes.

`alim('alim_mode')` sets the alpha limits mode on the current axes. `alim_mode` can be

- `auto` — MATLAB automatically sets the alpha limits based on the alpha data of the objects in the axes.
- `manual` — MATLAB does not change the alpha limits.

`alim(ax,...)` operates on the specified axes.

Examples

Set Alpha Limits

Plot a surface using the gradient of `z` as the alphamap. Adjust the alpha limits to see only where the gradient is between 0 and 0.15.

```
[x,y] = meshgrid(-2:.2:2);
z = x.*exp(-x.^2-y.^2);
surf(x,y,z+.001,'FaceAlpha','flat',...
    'AlphaDataMapping','scaled',...
    'AlphaData',gradient(z),...
    'FaceColor','blue');
alim([0 .15])
```

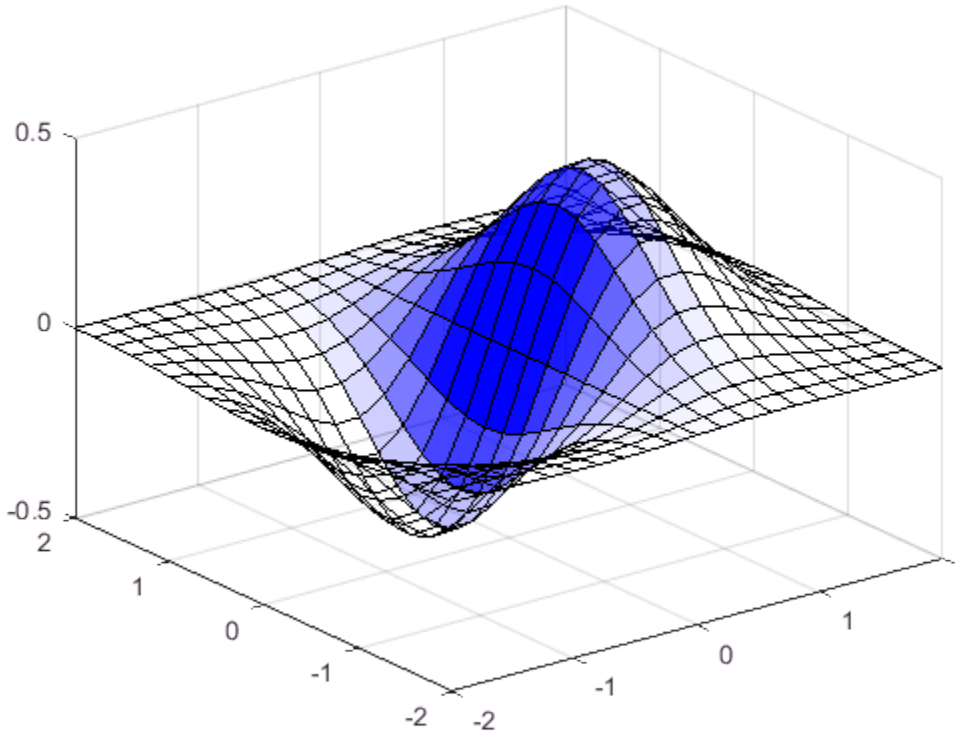

See Also

See Also

Functions
`alpha` | `alphamap` | `caxis`

Properties
Axes Properties

Introduced before R2006a

all

Determine if all array elements are nonzero or `true`

Syntax

```
B = all(A)
B = all(A,dim)
```

Description

`B = all(A)` tests along the first array dimension of `A` whose size does not equal 1, and determines if the elements are all nonzero or logical `1` (`true`). In practice, `all` is a natural extension of the logical AND operator.

- If `A` is a vector, then `all(A)` returns logical `1` (`true`) if all the elements are nonzero and returns logical `0` (`false`) if one or more elements are zero.
- If `A` is a nonempty, nonvector matrix, then `all(A)` treats the columns of `A` as vectors and returns a row vector of logical `1`s and `0`s.
- If `A` is an empty 0-by-0 matrix, then `all(A)` returns logical `1` (`true`).
- If `A` is a multidimensional array, then `all(A)` acts along the first array dimension whose size does not equal 1 and returns an array of logical values. The size of this dimension becomes `1`, while the sizes of all other dimensions remain the same.

`B = all(A,dim)` tests elements along dimension `dim`. The `dim` input is a positive integer scalar.

Examples

Test Matrix Columns

Create a 3-by-3 matrix, and then test each column for all nonzero elements.

```
A = [0 0 3;0 0 3;0 0 3]
```

```
A =

     0     0     3
     0     0     3
     0     0     3
```

```
B = all(A)
```

```
B = 1×3 logical array
   0   0   1
```

Reduce a Logical Vector to a Single Condition

Create a vector of decimal values and test which values are less than 0.5.

```
A = [0.53 0.67 0.01 0.38 0.07 0.42 0.69];
B = (A < 0.5)
```

```
B = 1×7 logical array
   0   0   1   1   1   1   0
```

The output is a vector of logical values. The `all` function reduces such a vector of logical values to a single condition. In this case, `B = all(A < 0.5)` yields logical `0`.

This makes `all` particularly useful in `if` statements.

```
if all(A < 0.5)

%do something

else

%do something else

end
```

The code is executed depending on a single condition, rather than a vector of possibly conflicting conditions.

Test Arrays of Any Dimension

Create a 3-by-7-by-5 multidimensional array and test to see if all of its elements are less than 3.

```
A = rand(3,7,5) * 5;
B = all(A(:) < 3)
```

```
B = logical
   0
```

You can also test the array for elements that are greater than zero.

```
B = all(A(:) > 0)
```

```
B = logical
   1
```

The syntax `A(:)` turns the elements of `A` into a single column vector, so you can use this type of statement on an array of any size.

Test Matrix Rows

Create a 3-by-3 matrix.

```
A = [0 0 3;0 0 3;0 0 3]
```

```
A =

     0     0     3
     0     0     3
     0     0     3
```

Test the rows of `A` for all nonzero elements by specifying `dim = 2`.

```
B = all(A,2)
```

```
B = 3×1 logical array
   0
   0
   0
```

Input Arguments

A — Input Array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional input array, A:

- `all(A,1)` works on successive elements in the columns of A and returns a row vector of logical values.
- `all(A,2)` works on successive elements in the rows of A and returns a column vector of logical values.

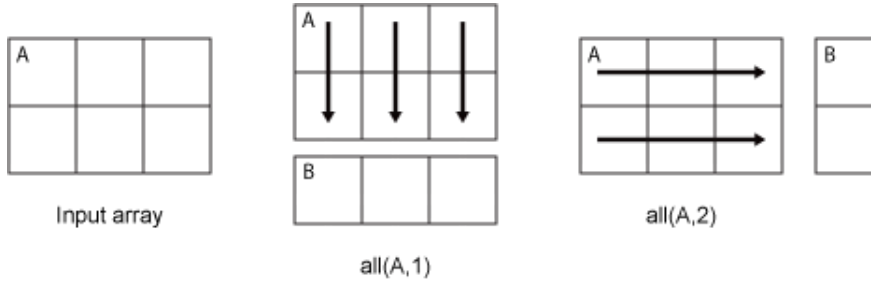

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

B — Logical array
scalar | vector | matrix | multidimensional array

Logical array, returned as a scalar, vector, matrix, or multidimensional array. The dimension of `A` acted on by `all` has size `1` in `B`.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also
`and` | `any` | `colon` | `prod` | `sum`

Topics
"Reduce Logical Arrays to Single Value"

Introduced before R2006a

allchild

Find all children of specified objects

Syntax

```
child_handles = allchild(handle_list)
```

Description

`child_handles = allchild(handle_list)` returns the list of all children (including ones with hidden handles) for each handle. If `handle_list` is a single element, `allchild` returns the output in a vector. If `handle_list` is a vector of handles, the output is a cell array.

Examples

Compare the results these two statements return:

```
axes
get(gca,'Children')
allchild(gca)
```

See Also

`findall` | `findobj`

Introduced before R2006a

alpha

Add transparency to objects in axes

Syntax

```
alpha value
alpha alphadata
alpha facealpha
alpha alphadatamapping

alpha(obj, ___ )
alpha(ax, ___ )
```

Description

`alpha value` sets the face transparency for graphics objects in the current axes that support transparency. Specify `value` as a scalar value between 0 (transparent) and 1 (no transparency), `'clear'`, or `'opaque'`.

`alpha alphadata` varies the transparency across all image, patch, chart surface, and primitive surface objects in the axes. This option sets the corresponding alpha data properties for the objects.

`alpha facealpha` specifies whether to use flat or interpolated transparency across the faces of all patch, chart surface, and primitive surface objects in the axes. This option sets the `FaceAlpha` property for the objects.

`alpha alphadatamapping` controls the interpretation of the alpha data values for all image, patch, chart surface, and primitive surface objects in the axes. This option sets the `AlphaDataMapping` property for the objects.

`alpha(obj, ___ )` sets the face transparency for the objects specified by `obj`. The option, `obj`, can precede any of the input arguments in the previous syntaxes. Use single quotes around input arguments that are character arrays, for example, `alpha(obj,'opaque')`.

`alpha(ax, ___)` sets the face transparency for the graphics objects in the axes specified by `ax`, instead of the current axes. Specify `ax` as the first input argument. You cannot specify both the `ax` and `obj` inputs.

Examples

Set Transparency for All Graphics Objects in Axes

Create a bar chart and a scatter chart. Set the face transparency for both the bar series and scatter series object to `0.5`.

```
bar(1:10)
hold on
scatter(10*rand(10,1),10*rand(10,1),'filled','SizeData',200)
hold off
alpha(.5)
```

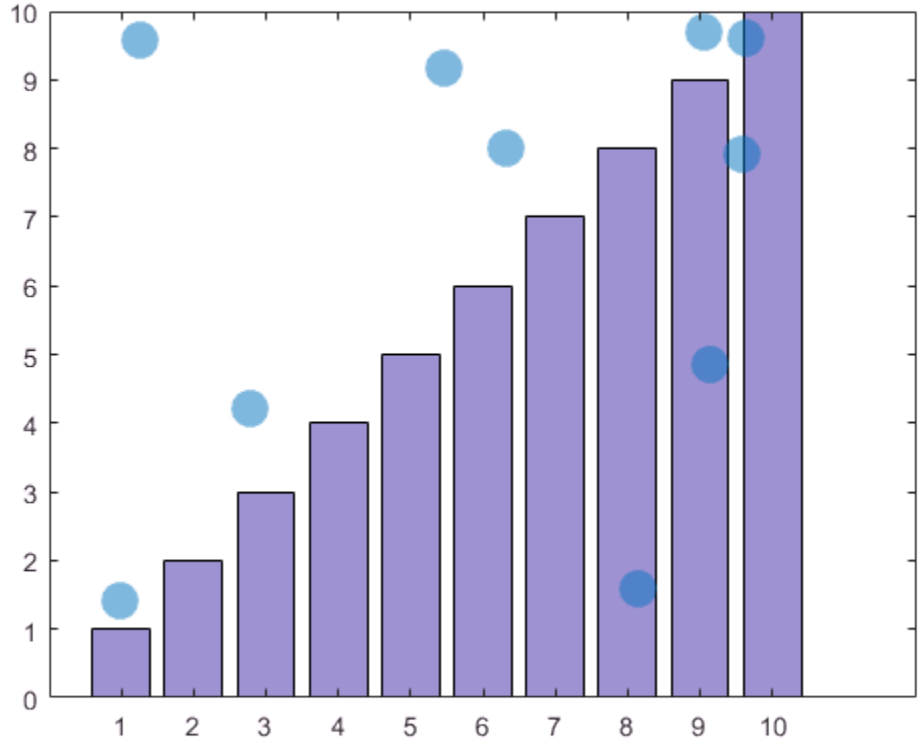

Set Transparency for Specific Graphics Object

Create a bar chart and a scatter chart. Set the transparency for the scatter series object to `0.5` without affecting the bar series object.

```
b = bar(1:10);
hold on
s = scatter(10*rand(10,1),10*rand(10,1),'filled','SizeData',200);
hold off
alpha(s,.5)
```

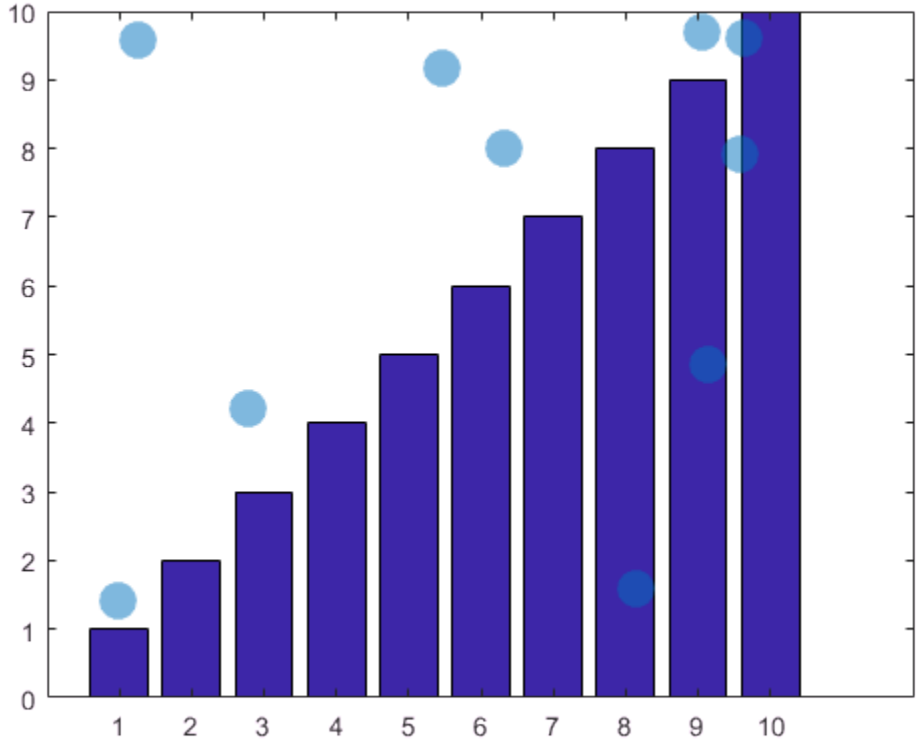

Set Surface Transparency Using *z* Values

Create a surface chart. Vary the transparency across the surface based on the *z* values.

```
s = surf(peaks);
alpha(s,'z')
```

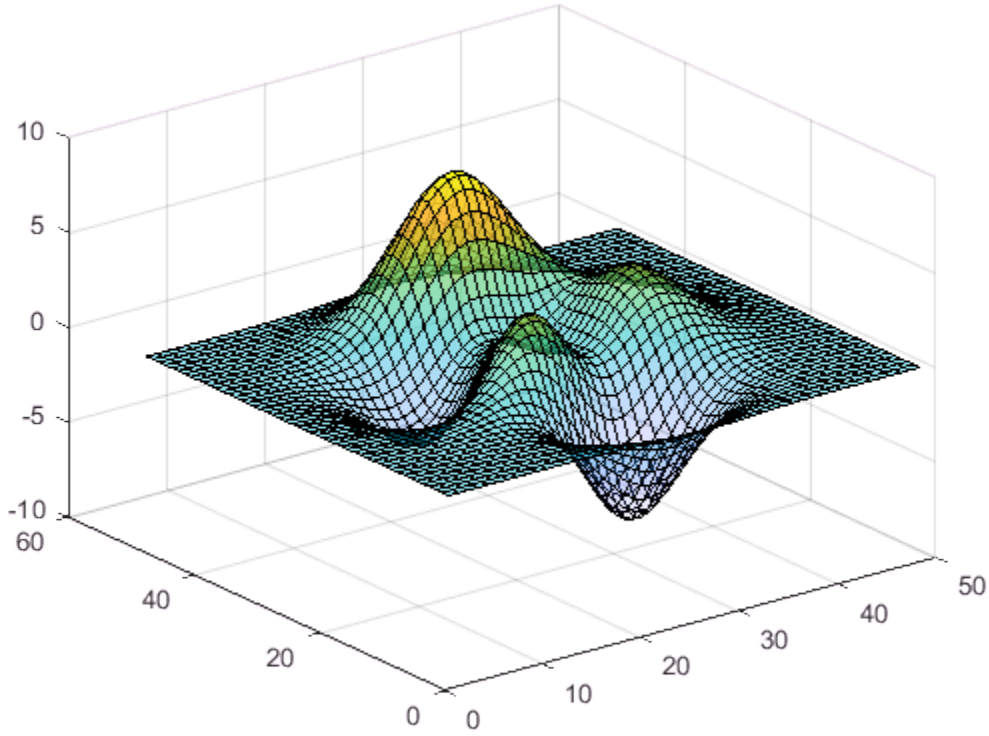

Set Mapping of Alpha Data into Alphamap

Create an image. Vary the transparency across the image based on the color values. By default, the image clamps the transparency values between 0 and 1. Values less than 0 are completely transparency and values greater than 1 are completely opaque. Instead, transform the transparency values to span the alphamap using the `alpha scaled` command.

```
imagesc(peaks)
alpha color
alpha scaled
```

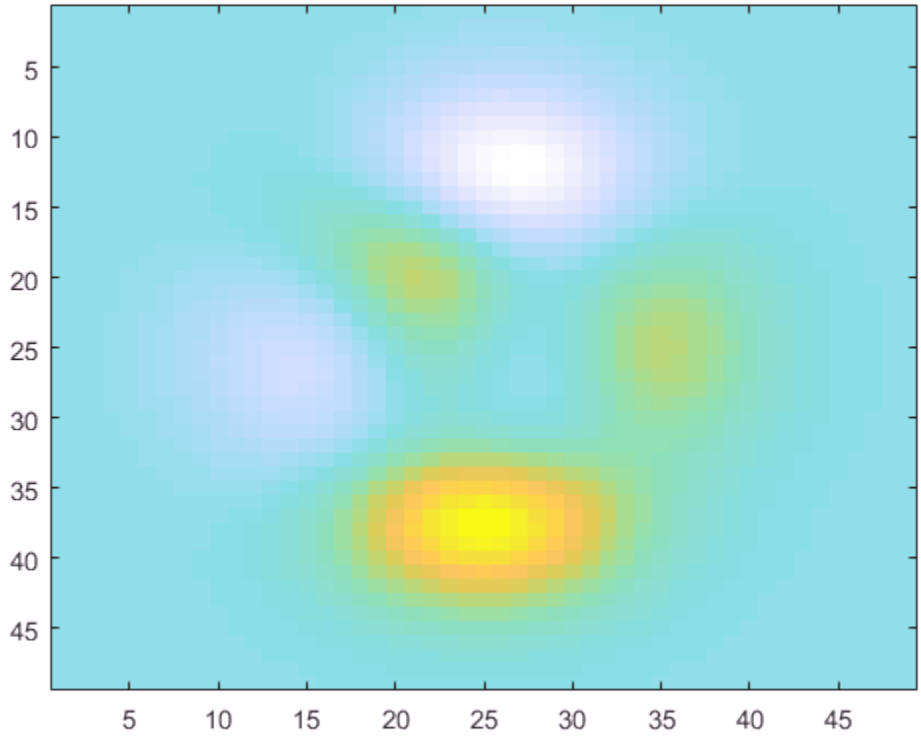

- "Add Transparency to Graphics Objects"

Input Arguments

`value` — Face transparency value
scalar from 0 through 1 | `'clear'` | `'opaque'`

Face transparency value, specified as one of these values:

- Scalar from 0 through 1 — Set the face transparency to the specified value. A value of 0 means transparent. A value of 1 means opaque. Values between 0 and 1 are semitransparent.

- `'clear'` — Set the face transparency to 0 (transparent).
- `'opaque'` — Set the face transparency to 1 (opaque).

If the object does not have a face or if the face has no color, then the `alpha` function does not have a visual effect on the object. For example, `alpha` does not have a visual effect on scatter charts that use unfilled markers or that use markers without a face (`'*'`, `'+'`, `'.'`, and `'x'`).

This table lists the graphics objects that support transparency and the associated face transparency property that updates to the value specified.

Graphics Object	Face Transparency Property
Area objects	FaceAlpha
Bar series objects	FaceAlpha
Scatter series objects	MarkerFaceAlpha
Histogram and histogram2 objects	FaceAlpha
Image objects	AlphaData
Chart and primitive surface objects	FaceAlpha
Patch objects	FaceAlpha

`alphadata` — Option to vary transparency across object

`'x'` | `'y'` | `'z'` | `'color'` | `'rand'` | matrix

Option to vary the transparency across the object, specified as one of the values in this table. The table columns indicate how each option affects the different types of objects, depending on what objects are contained in the axes.

Option	Chart or Primitive Surface Objects	Patch Objects	Image Objects
`'x'`	Set the AlphaData property to be the same as the `XData` property and set the FaceAlpha property to `'flat'`.	Set the FaceVertexAlphaData property to be the same as the `XData` property and set the FaceAlpha property to `'flat'`.	No effect.

Option	Chart or Primitive Surface Objects	Patch Objects	Image Objects
`'y'`	Set the `AlphaData` property to be the same as the `YData` property and set the `FaceAlpha` property to `'flat'`.	Set the `FaceVertexAlphaDa` property to be the same as the `YData` property and set the `FaceAlpha` property to `'flat'`.	No effect.
`'z'`	Set the `AlphaData` property to be the same as the `ZData` property and set the `FaceAlpha` property to `'flat'`.	Set the `FaceVertexAlphaDa` property to be the same as the `ZData` property and set the `FaceAlpha` property to `'flat'`.	No effect.
`'color'`	Set the `AlphaData` property to be the same as the `CData` property and set the `FaceAlpha` property to `'flat'`.	Set the `FaceVertexAlphaDa` property to be the same as the `FaceVertexCData` property and set the `FaceAlpha` property to `'flat'`.	Set the AlphaData data property to be the same as the `CData` property.
`'rand'`	Set the `AlphaData` property to a matrix of random numbers the same size as the `ZData` property and set the `FaceAlpha` property to `'flat'`.	Set the `FaceVertexAlphaDa` property to a matrix of random numbers the same size as the `ZData` property and set the `FaceAlpha` property to `'flat'`.	Set the `AlphaData` data property to a matrix of random numbers the same size as the `CData` property.

Option	Chart or Primitive Surface Objects	Patch Objects	Image Objects
Matrix Use the function form of the command, for example, `alpha([.1 .2; .3`	Set the `AlphaData` property to the matrix and set the `FaceAlpha` property to `'flat'`. The matrix must be the same size as the `CData` property of the surface.	Set the `FaceVertexAlphaDa` property to the matrix and set the `FaceAlpha` property to `'flat'`. The matrix must be the same size as the `FaceVertexCData` property of the patch.	Set the `AlphaData` data property to the matrix. The matrix must be the same size as the `CData` property of the image.

`facealpha` — Option for flat or interpolated face transparency

`'flat'` | `'interp'` | `'texture'`

Option for flat or interpolated face transparency, specified as one of the values in this table. The table columns indicate how each option affects the different types of objects, depending on what objects are contained in the axes.

Option	Chart or Primitive Surface Objects	Patch Objects
`'flat'`	Set the FaceAlpha property to `'flat'`. The `AlphaData` property must be an array the same size as the `CData` property. The `FaceColor` property must be set to `'flat'`.	Set the FaceAlpha property to `'flat'`. The `FaceVertexAlphaData` property must be a column vector with length equal to the number of faces in the `Faces` property.
`'interp'`	Set the `FaceAlpha` property to `'interp'`. The `AlphaData` property must be an array the same size as the `CData` property. The `FaceColor` property must be set to `'interp'`.	Set the `FaceAlpha` property to `'interp'`. The `FaceVertexAlphaData` property must be a column vector with length equal to the number of vertices in the `Vertices` property.
`'texture'`	Set the `FaceAlpha` property to `'texturemap'`.	No effect.

Option	Chart or Primitive Surface Objects	Patch Objects
	The `FaceColor` property must be set to `'texturemap'`.	

`alphadatamapping` — Interpretation of alpha data values

`'none'` | `'direct'` | `'scaled'`

Interpretation of alpha data values, specified as `'none'`, `'direct'`, or `'scaled'`. This option sets the `AlphaDataMapping` property for image, patch, and surface objects in the axes.

- `'none'` — Interpret alpha data values as transparency values. A value of 0 or less is completely transparent. A value of 1 or greater is opaque. Values between 0 and 1 are semitransparent.
- `'direct'` — Interpret the values as indices into the figure's alphamap. Fix values with a decimal portion to the nearest lower integer. The Alphamap property of the figure contains the alphamap.
- `'scaled'` — Transform the alpha data values to span the portion of the figure's alphamap indicated by the ALim property of the axes. Linearly map the data values to alpha values.

`obj` — Graphics objects that support transparency

scalar | vector

Graphics objects that support transparency, specified as a scalar or vector. Use this option if you want to control which objects `alpha` affects. Otherwise, `alpha` affects all objects in the axes that support transparency.

Specify one or more of these types of objects:

- Area object
- Bar series object
- Scatter series object
- Histogram or histogram2 object
- Image object
- Patch object

- Chart or primitive surface object

Note: Not all objects support the `alphadata`, `facealpha`, and `alphadatamapping` input arguments. See the syntax descriptions for a list of objects that each option supports.

ax — Axes object

axes object

Axes object. If you do not specify the axes, then `alpha` sets the transparency for graphics objects in the current axes.

See Also

See Also

`alim` | `alphamap`

Topics

"Add Transparency to Graphics Objects"

Introduced before R2006a

alphamap

Specify figure alphamap (transparency)

Syntax

```
alphamap(alpha_map)
alphamap('parameter')
alphamap('parameter',length)
alphamap('parameter',delta)
alphamap(figure_handle,...)
alphamap(axes_handle,...)
alpha_map = alphamap
alpha_map = alphamap(figure_handle)
alpha_map = alphamap(axes_handle)
alpha_map = alphamap('parameter')
```

Description

`alphamap(alpha_map)` sets the `AlphaMap` of the current figure to the specified `m`-by-1 array of alpha values, `alpha_map`.

`alphamap('parameter')` creates a new alphamap or modifies the current alphamap. You can specify the following parameters:

- `'default'` — Set the `AlphaMap` property to the figure's default alphamap.
- `'rampup'` — Create a linear alphamap with increasing opacity (default `length` equals the current alphamap length).
- `'rampdown'` — Create a linear alphamap with decreasing opacity (default `length` equals the current alphamap length).
- `'vup'` — Create an alphamap that is opaque in the center and becomes more transparent linearly towards the beginning and end (default `length` equals the current alphamap length).
- `'vdown'` — Create an alphamap that is transparent in the center and becomes more opaque linearly towards the beginning and end (default `length` equals the current alphamap length).

- `'increase'` — Modify the alphamap making it more opaque (default `delta` is `.1`, added to the current values).
- `'decrease'` — Modify the alphamap making it more transparent (default `delta` is `.1`, subtracted from the current values).
- `'spin'` — Rotate the current alphamap (default `delta` is 1; `delta` must be an integer).

`alphamap('parameter',length)` creates a new alphamap with the length specified by the integer `length` (used with parameters `'rampup'`, `'rampdown'`, `'vup'`, `'vdown'`).

`alphamap('parameter',delta)` modifies the existing alphamap using the value specified by the integer `delta` (used with parameters `'increase'`, `'decrease'`, `'spin'`).

`alphamap(figure_handle,...)` performs the operation on the alphamap of the figure identified by `figure_handle`.

`alphamap(axes_handle,...)` performs the operation on the alphamap of the axes identified by `axes_handle`.

`alpha_map = alphamap` returns the current alphamap.

`alpha_map = alphamap(figure_handle)` returns the current alphamap from the figure identified by `figure_handle`.

`alpha_map = alphamap(axes_handle)` returns the current alphamap from the axes identified by `axes_handle`.

`alpha_map = alphamap('parameter')` returns the alphamap modified by the `parameter`, but does not set the `AlphaMap` property.

Examples

Change Alphamap for Surface Plot

Create a surface plot and change the alphamap.

```
[x,y] = meshgrid([-2:.2:2]);
```

```
z = x.*exp(-x.^2-y.^2);
```

Plot the data, using the gradient of z as the alphamap.

```
figure
surf(x,y,z+.001,'FaceAlpha','flat',...
    'AlphaDataMapping','scaled',...
    'AlphaData',gradient(z),...
    'FaceColor','blue')
```

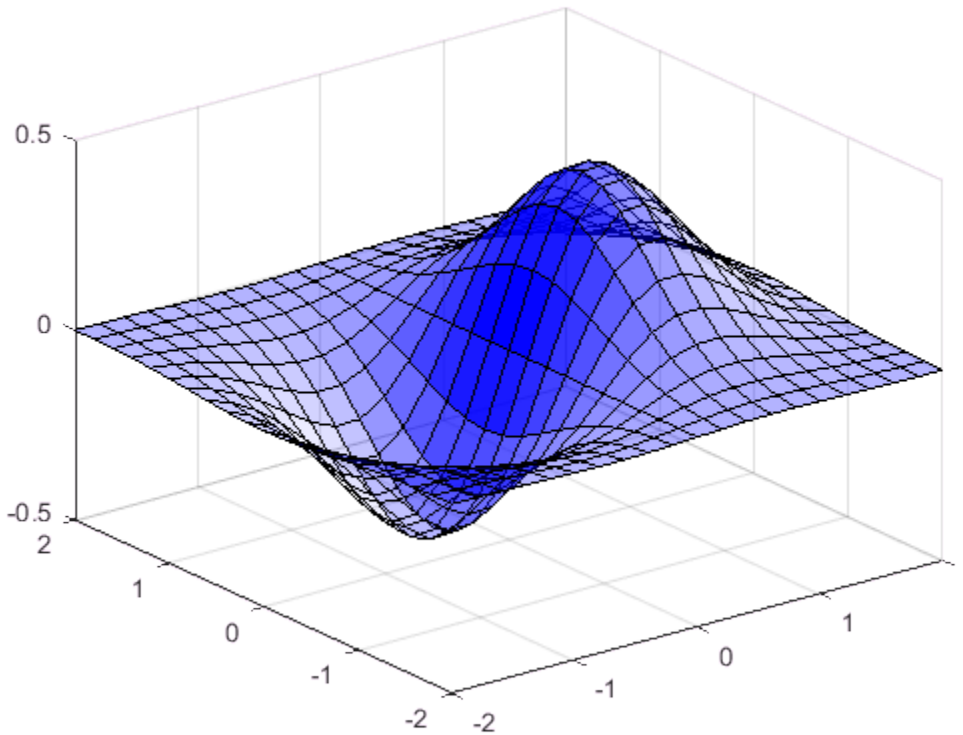

Change the alphamap to be opaque at the middle and transparent towards the ends.

```
alphamap('vup')
```

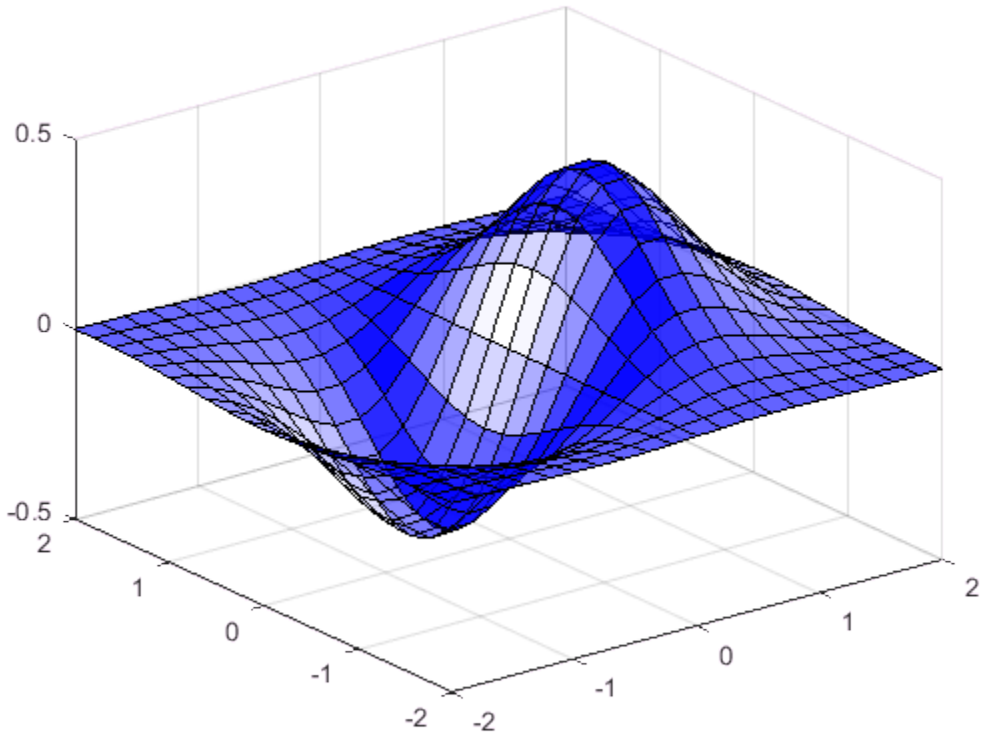

See Also

`alim` | `alpha`

Introduced before R2006a

alphaShape

Polygons and polyhedra from points in 2-D and 3-D

Syntax

```
shp = alphaShape(x,y)
shp = alphaShape(x,y,z)
shp = alphaShape(P)
shp = alphaShape(___,a)
shp = alphaShape(___,Name,Value)
```

Description

`shp = alphaShape(x,y)` creates a 2-D alpha shape of the points `(x,y)` using the default alpha radius. The default alpha radius produces the tightest fitting alpha shape, which encloses all of the points.

`shp = alphaShape(x,y,z)` creates a 3-D alpha shape of the points `(x,y,z)` using the default alpha radius.

`shp = alphaShape(P)` specifies points `(x,y)` or `(x,y,z)` in the columns of matrix `P`.

`shp = alphaShape(___,a)` creates an alpha shape with alpha radius `a` using any of the arguments in the previous syntaxes.

`shp = alphaShape(___,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments. For example, you can suppress interior holes or voids using `'HoleThreshold'`.

Examples

Alpha Shape from 2-D Point Cloud

Create and plot a set of 2-D points.

```
th = (pi/12:pi/12:2*pi)';
x1 = [reshape(cos(th)*(1:5), numel(cos(th)*(1:5)),1); 0];
y1 = [reshape(sin(th)*(1:5), numel(sin(th)*(1:5)),1); 0];
x = [x1; x1+15];
y = [y1; y1];
plot(x,y,'.')
axis equal
```

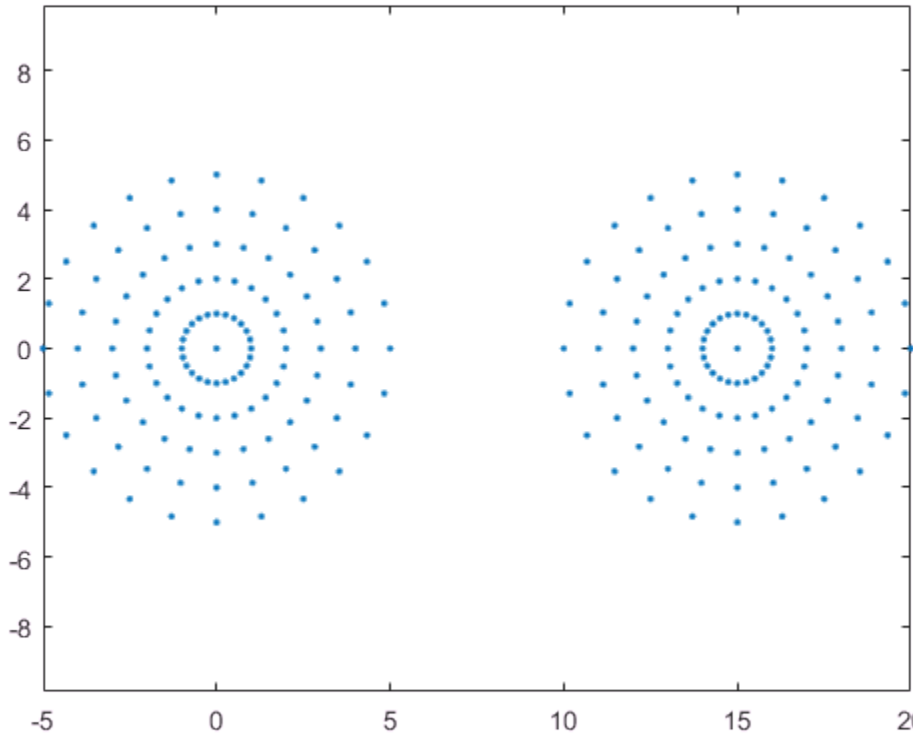

Compute an alpha shape for the point set using the default alpha radius.

```
shp = alphaShape(x,y);
plot(shp)
```

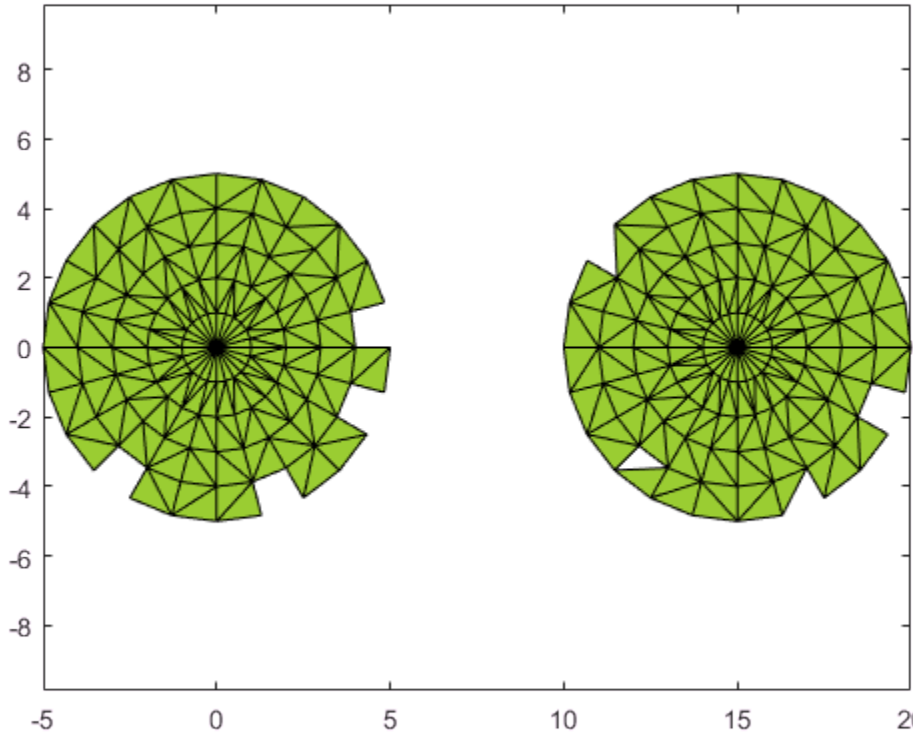

Check the value of the default alpha radius.

```
shp.Alpha
```

```
ans = 0.7752
```

The default alpha radius results in an alpha shape with a jagged boundary. To better capture the boundary of the point set, try a larger alpha radius.

Compute an alpha shape using an alpha value of 2.5.

```
shp.Alpha = 2.5;
plot(shp)
```

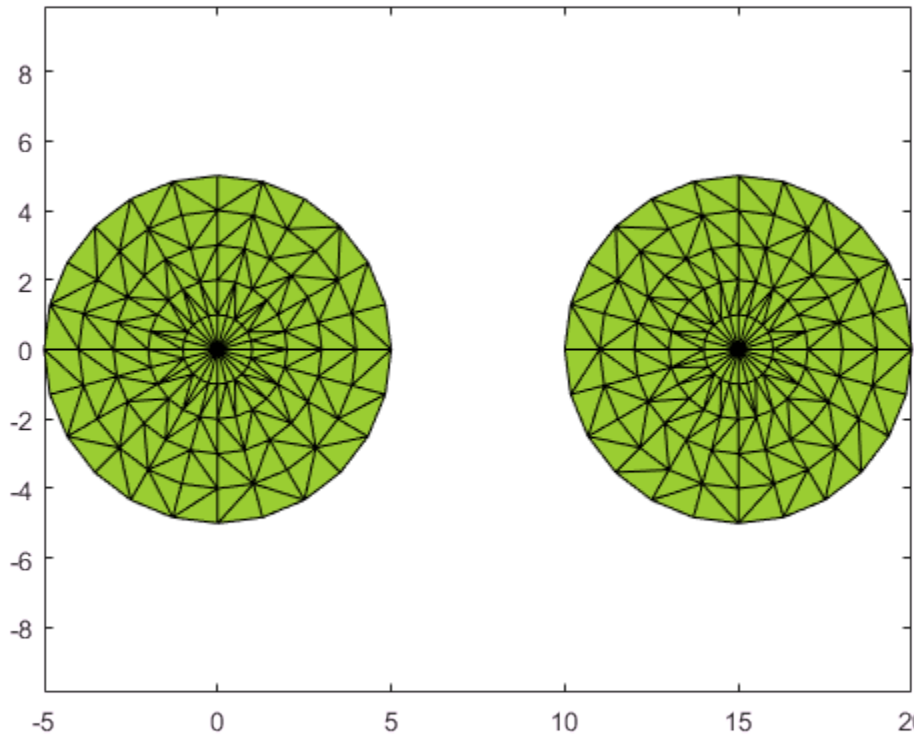

Alpha Shape from 3-D Point Cloud

Create and plot a set of 3-D points.

```
[x1, y1, z1] = sphere(24);
x1 = x1(:);
y1 = y1(:);
z1 = z1(:);
x2 = x1+5;
P = [x1 y1 z1; x2 y1 z1];
P = unique(P,'rows');
plot3(P(:,1),P(:,2),P(:,3),'.')
```

```
axis equal
grid on
```

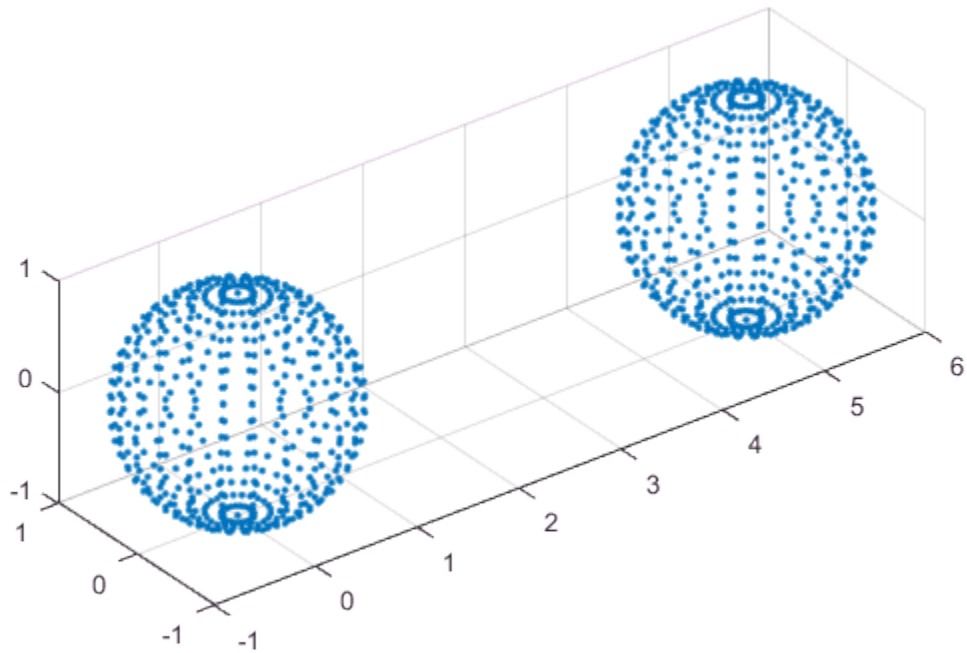

Compute a 3-D alpha shape using an alpha radius of 1.

```
shp = alphaShape(P(:,1),P(:,2),P(:,3),1);
plot(shp)
axis equal
```

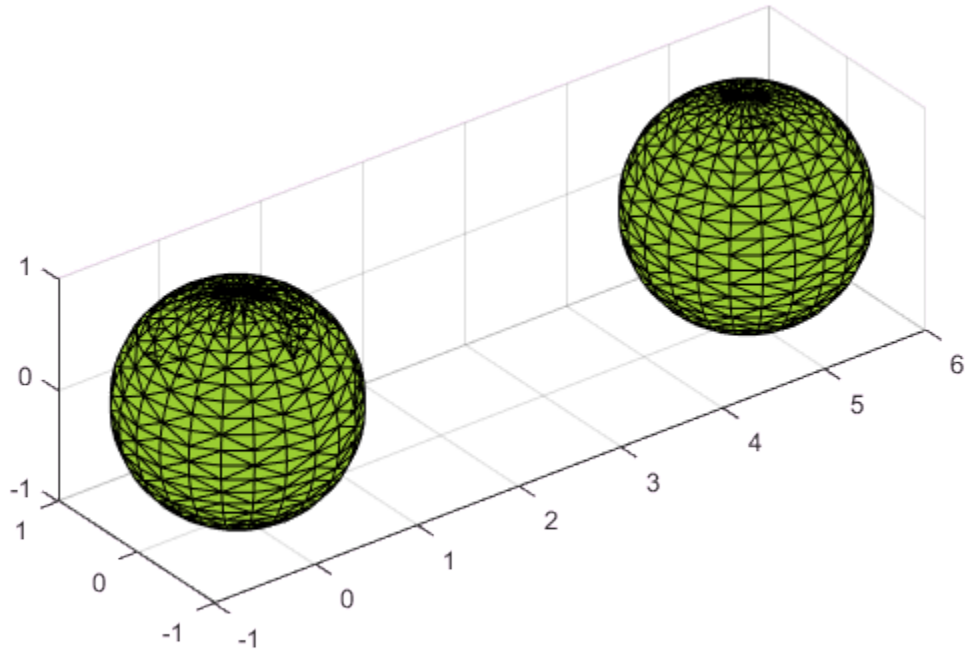

Fill Holes in 2-D Alpha Shape

Create and plot a 2-D set of points.

```
th = (pi/12:pi/12:2*pi)';
x1 = [reshape(cos(th)*(2:5), numel(cos(th)*(2:5)),1);];
y1 = [reshape(sin(th)*(2:5), numel(sin(th)*(2:5)),1);];
x = [x1; x1+15;];
y = [y1; y1];
plot(x,y,'.')
axis equal
```

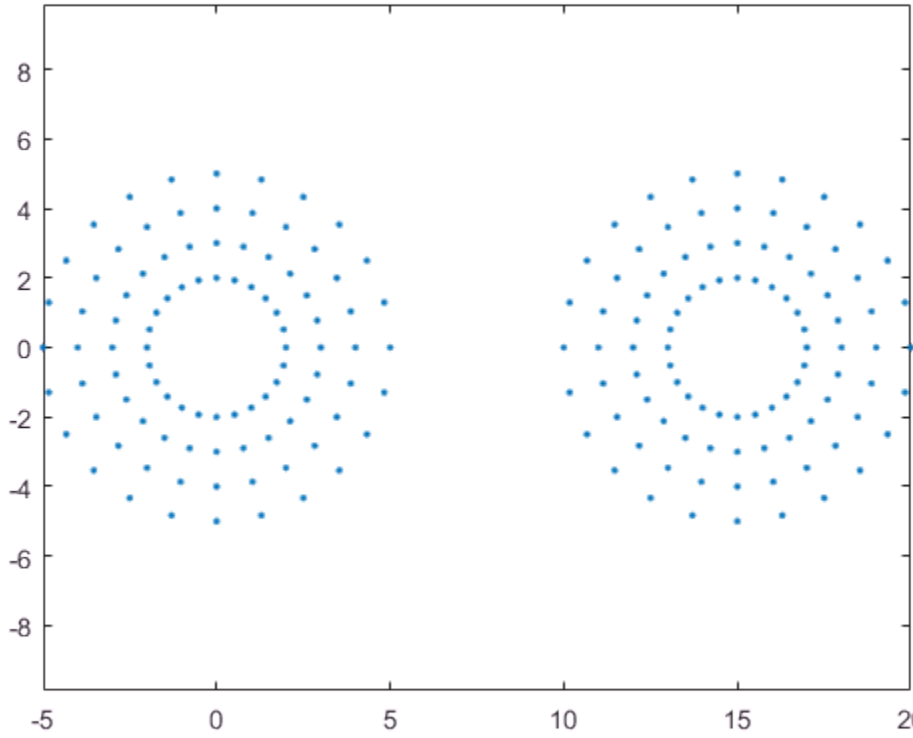

Compute an alpha shape for the point set using an alpha radius of 1.

```
shp = alphaShape(x,y,1);
plot(shp)
```

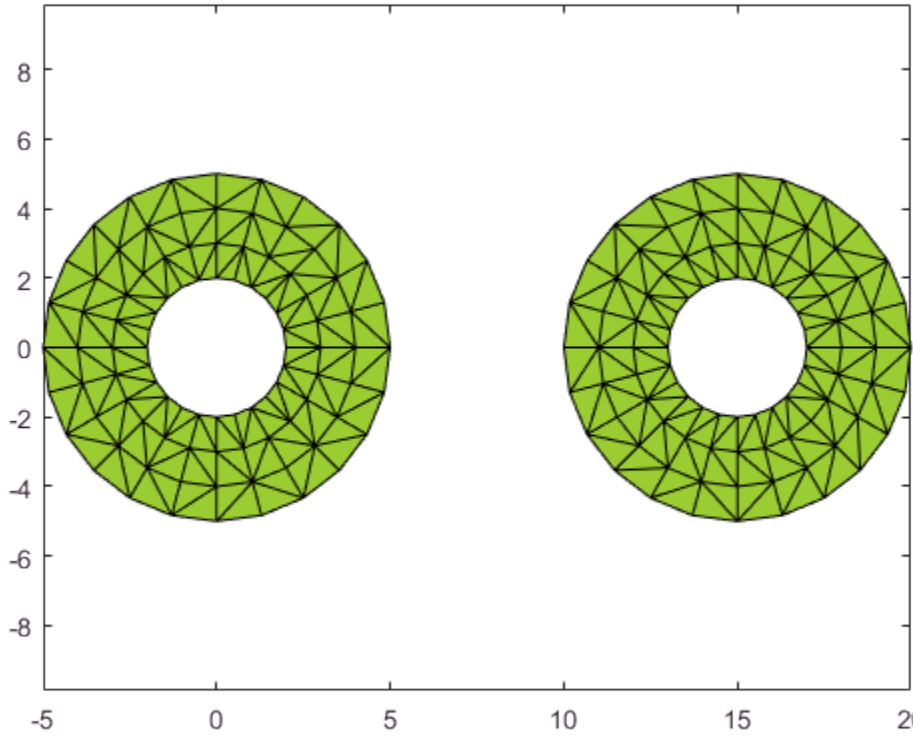

An alpha radius of 1 results in an alpha shape with two regions containing holes. To suppress the small holes in the alpha shape, you can specify a `HoleThreshold` by estimating the area of the largest hole to fill. To fill all holes in the shape, you can assign an arbitrarily large value to `HoleThreshold`.

Create a new alpha shape that suppresses the holes by specifying a `HoleThreshold` of 15.

```
shp = alphaShape(x,y,1,'HoleThreshold',15);
plot(shp)
```

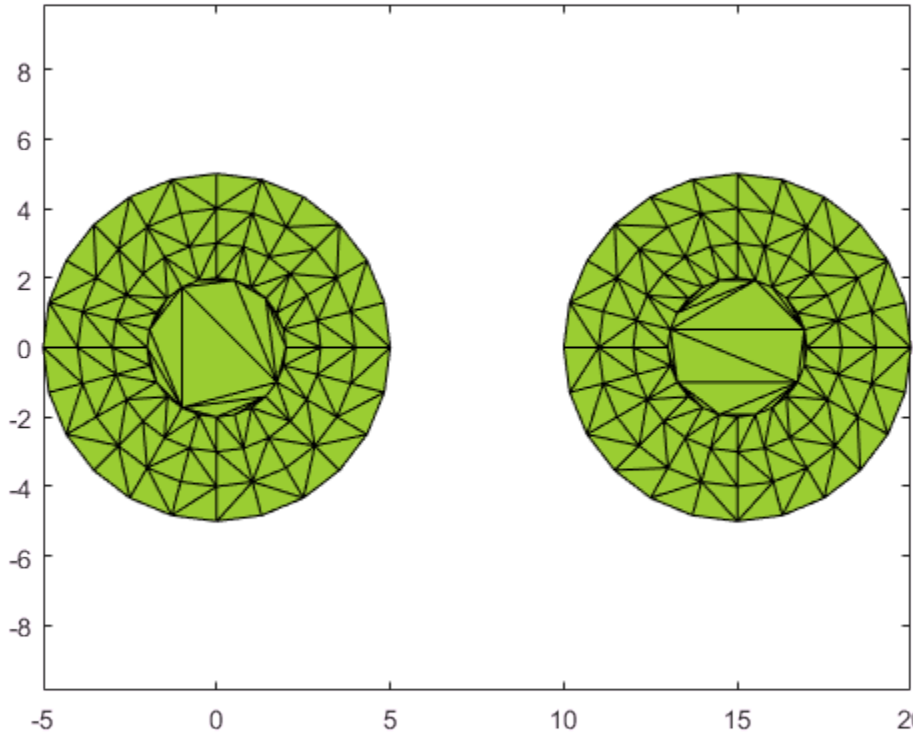

Discard Small Regions of 3-D Alpha Shape

Create and plot a set of 3-D points.

```
[x1, y1, z1] = sphere(24);
x1 = x1(:);
y1 = y1(:);
z1 = z1(:);
x2 = x1+5;
[x3, y3, z3] = sphere(5);
x3 = x3(:)+5;
y3 = y3(:);
```

```
z3 = z3(:)+25;
P = [x1 y1 z1; x2 y1 z1; 0.25*x3 0.25*y3 0.25*z3];
P = unique(P,'rows');
plot3(P(:,1),P(:,2),P(:,3),'.')
axis equal
grid on
```

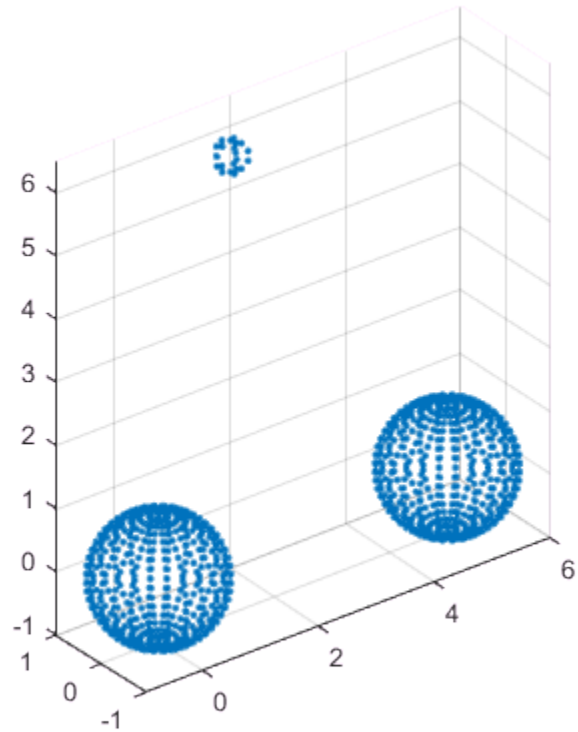

Compute an alpha shape for the point set using an alpha radius of 1.

```
shp = alphaShape(P,1);
plot(shp)
axis equal
```

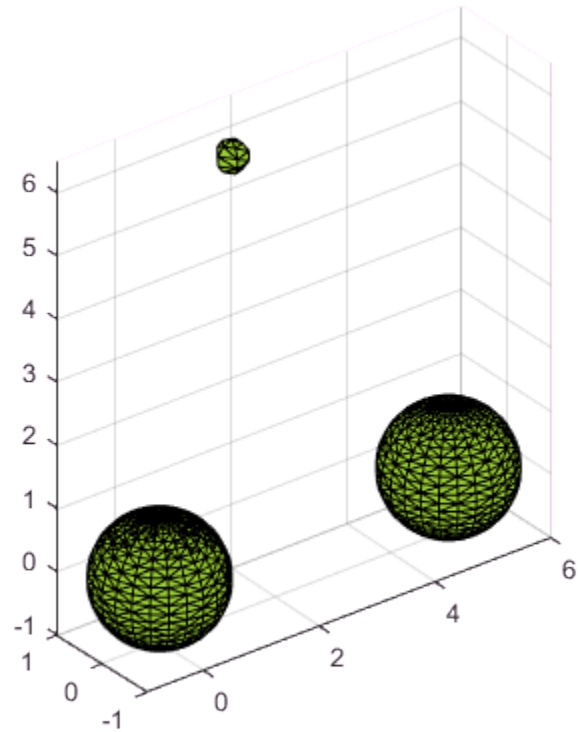

In this case, the alpha shape produces a small region above the two equal-sized spheres. To suppress this region, you can specify a `RegionThreshold` by estimating its volume.

Specify a `RegionThreshold` of 2. The resulting shape contains only the two larger regions.

```
shp.RegionThreshold = 2;
plot(shp)
axis equal
```

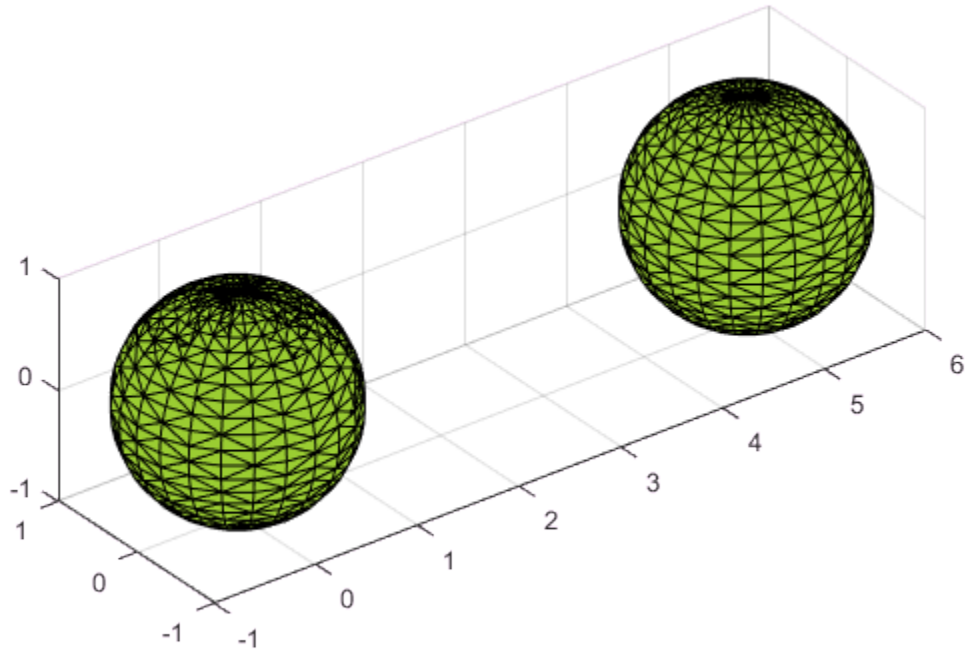

Modify Points of 2-D Alpha Shape

Create and plot a 2-D set of points.

```
th = (pi/12:pi/12:2*pi)';
x1 = [reshape(cos(th)*(1:5), numel(cos(th)*(1:5)),1); 0];
y1 = [reshape(sin(th)*(1:5), numel(sin(th)*(1:5)),1); 0];
x = [x1; x1+15;];
y = [y1; y1];
plot(x,y,'.')
axis equal
```

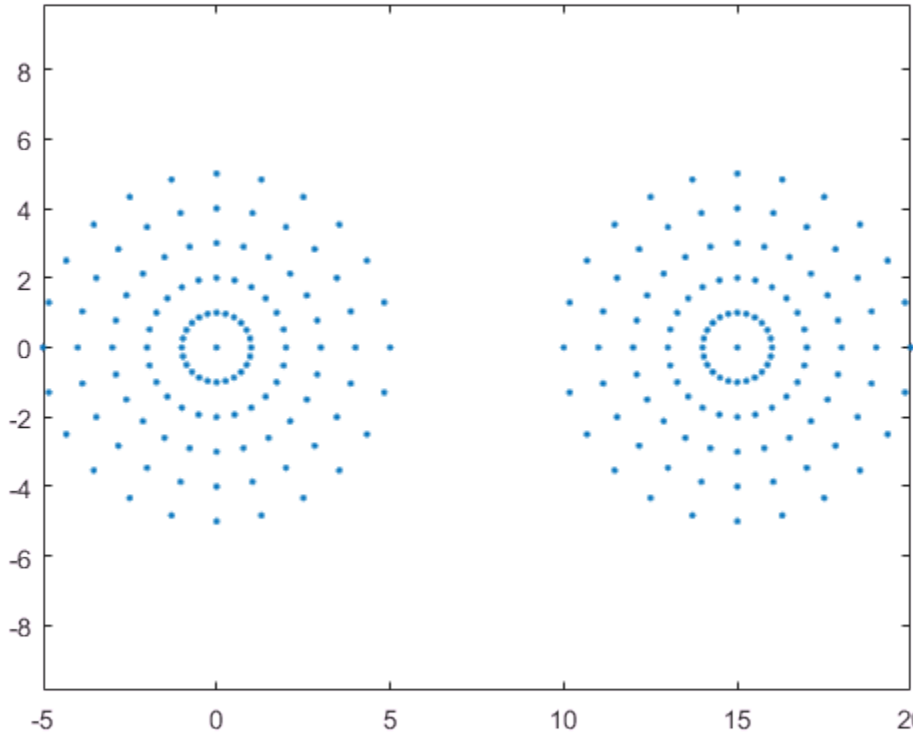

Compute an alpha shape for the point set using an alpha radius of 1. The resulting alpha shape has two regions.

```
shp = alphaShape(x,y,1);
plot(shp)
```

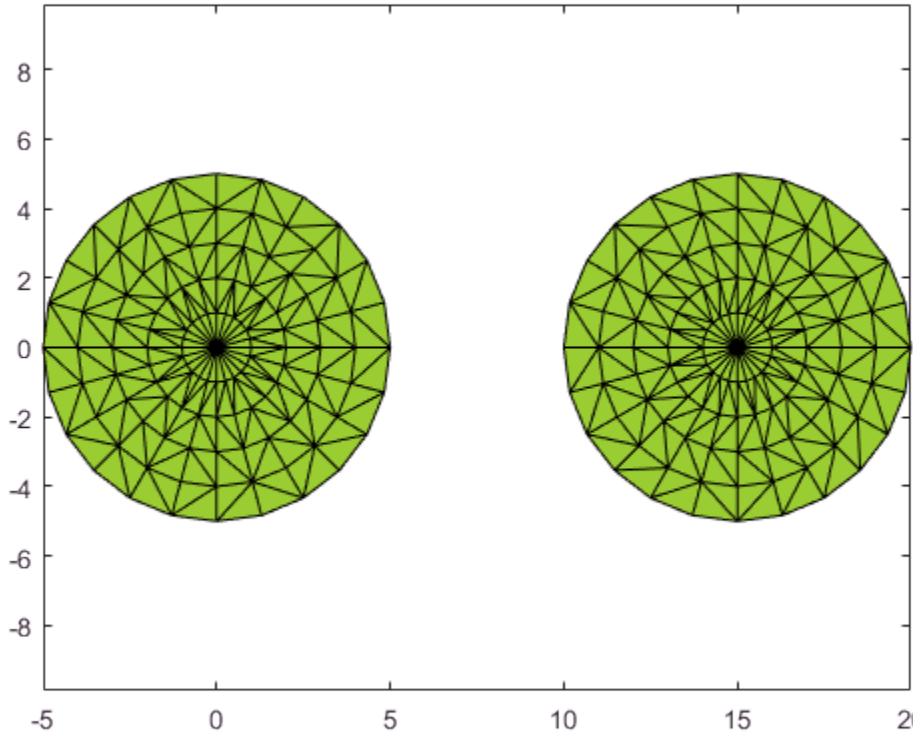

Now add a third region to the alpha shape by adding new points directly to the `shp.Points` matrix.

```
x3 = x1+8;
y3 = y1+10;
shp.Points(end+1,:) = [x3 y3];
plot(shp)
```

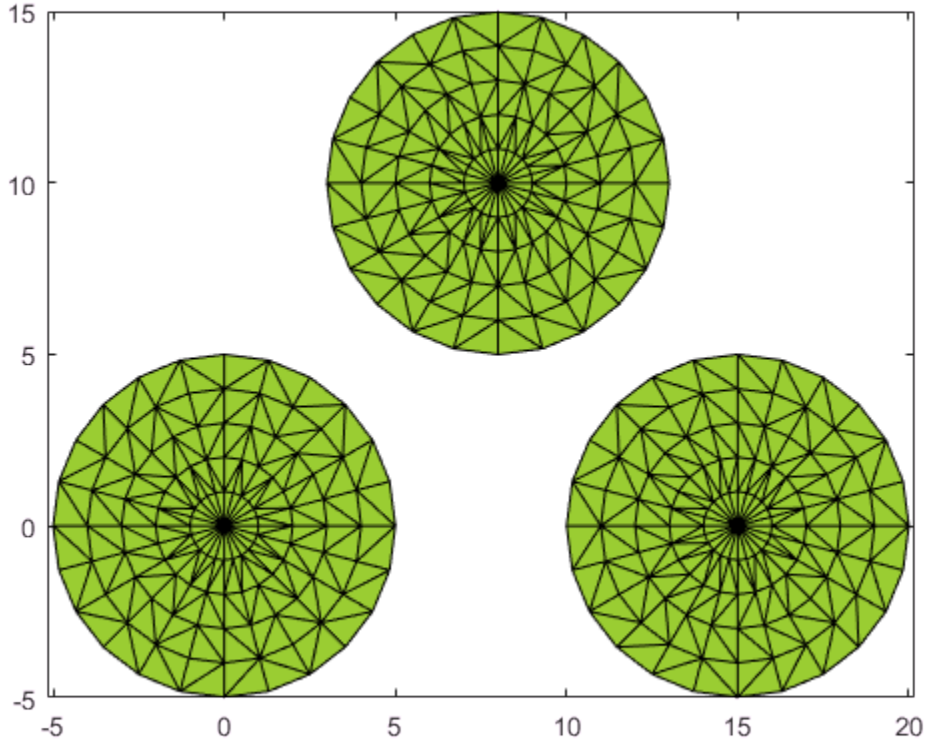

Input Arguments

x — x-coordinates of points
column vector

x-coordinates of points, specified as a column vector.

Data Types: `double`

y — y-coordinates of points
column vector

y-coordinates of points, specified as a column vector.

Data Types: `double`

`z` — z-coordinates of points
column vector

z-coordinates of points, specified as a column vector.

Data Types: `double`

`P` — Point coordinates
matrix with two columns | matrix with three columns

Point coordinates, specified as a matrix with two columns (for a 2-D alpha shape) or a matrix with three columns (for a 3-D alpha shape).

- For 2-D, the columns of `P` represent `x` and `y` coordinates, respectively.
- For 3-D, the columns of `P` represent `x`, `y`, and `z` coordinates, respectively.

Data Types: `double`

`a` — Alpha radius
nonnegative scalar

Alpha radius, specified as a nonnegative scalar. The default alpha radius is `a = criticalAlpha(shp,'all-points')`, which is the smallest alpha radius that produces an alpha shape that encloses all points.

Specify `a = criticalAlpha(shp,'one-region')` to use the smallest alpha radius that produces an alpha shape with only one region.

The extreme values of `a` are

- `Inf`, where `alphaShape` produces the convex hull.
- `0`, where `alphaShape` produces an empty alpha shape.

Data Types: `double`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `shp = alphaShape(...,'HoleThreshold',10)`

`'HoleThreshold'` — Maximum area or volume of interior holes or voids to fill in
0 (default) | finite, nonnegative scalar

Maximum area or volume of interior holes or voids to fill in, specified as a finite, nonnegative scalar.

- For 2-D, `HoleThreshold` specifies the maximum area of interior holes to fill in.
- For 3-D, `HoleThreshold` specifies the maximum volume of interior voids to fill in. Holes extending completely through the alpha shape cannot be filled in.

When you specify both a `'HoleThreshold'` and a `'RegionThreshold'`, the application of the thresholds is order dependent. `alphaShape` fills in holes before suppressing regions.

Data Types: `double`

`'RegionThreshold'` — Maximum area or volume of regions to suppress
0 (default) | finite, nonnegative scalar

Maximum area (2-D) or volume (3-D) of regions to suppress, specified as a finite, nonnegative scalar.

When you specify a `'HoleThreshold'` and a `'RegionThreshold'`, the application of the thresholds is order dependent. `alphaShape` fills in holes before suppressing regions.

Data Types: `double`

Output Arguments

`shp` — 2-D or 3-D alpha shape
alphaShape object

2-D or 3-D alpha shape. For more information, see alphaShape.

The `alphaShape` function returns regularized alpha shapes:

- In 2-D, `shp` represents a polygon. The polygon has no isolated points or edges, nor does it have dangling edges.

- In 3-D, `shp` represents a polyhedron. The polyhedron has the previously stated polygon traits, but it additionally does not have isolated faces or dangling faces.

See Also

See Also

`boundary` | `convhull` | `criticalAlpha` | delaunayTriangulation | triangulation | `trisurf`

Introduced in R2014b

alphaSpectrum

Alpha values giving distinct alpha shapes

Syntax

```
a = alphaSpectrum(shp)
```

Description

`a = alphaSpectrum(shp)` returns the values of the alpha radius that produce distinct alpha shapes. `a` is in descending sorted order. Each element in `a` represents a value of the alpha radius that results in a distinct shape. The length of `a` is equal to the number of unique shapes. Values of alpha that lie between the values in `a` do not produce unique alpha shapes.

Examples

Find Alpha Spectrum for 2-D Point Cloud

Create and plot a set of 2-D points.

```
th = (pi/12:pi/12:2*pi)';
x1 = [reshape(cos(th)*(1:5), numel(cos(th)*(1:5)),1); 0];
y1 = [reshape(sin(th)*(1:5), numel(sin(th)*(1:5)),1); 0];
x = [x1; x1+15;];
y = [y1; y1];
plot(x,y,'.')
axis equal
```

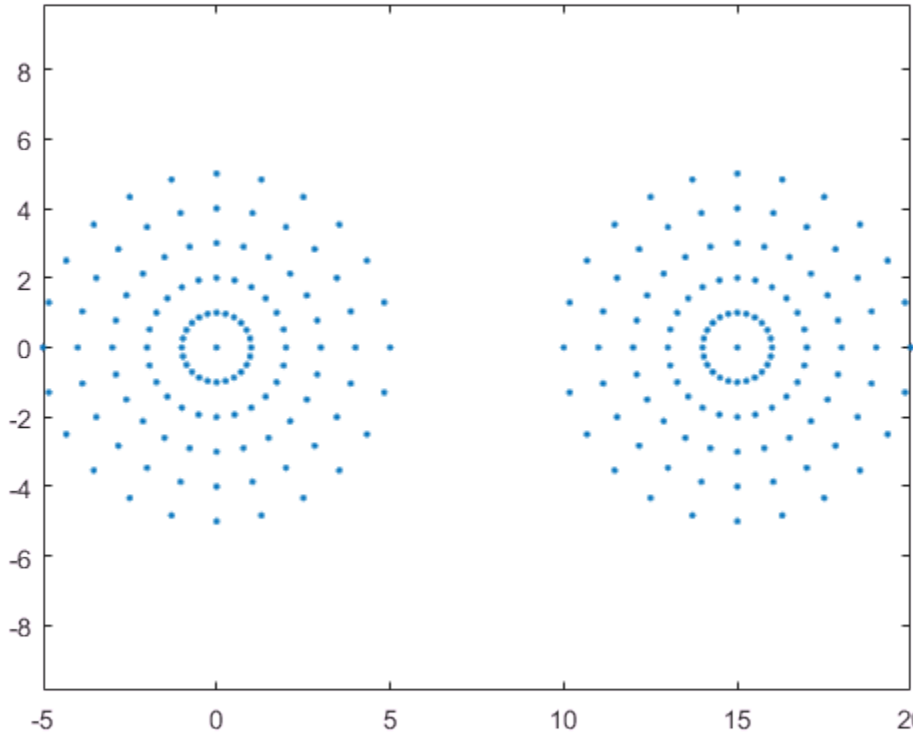

Create an alpha shape for the point cloud using the default alpha radius.

```
shp = alphaShape(x,y);
```

Find the spectrum of critical alpha values that produces unique alpha shapes for the point cloud.

```
alphaspec = alphaSpectrum(shp);
```

Plot the alpha shape corresonding to the smallest alpha value in the spectrum.

```
shp.Alpha = alphaspec(length(alphaspec));
plot(shp)
```

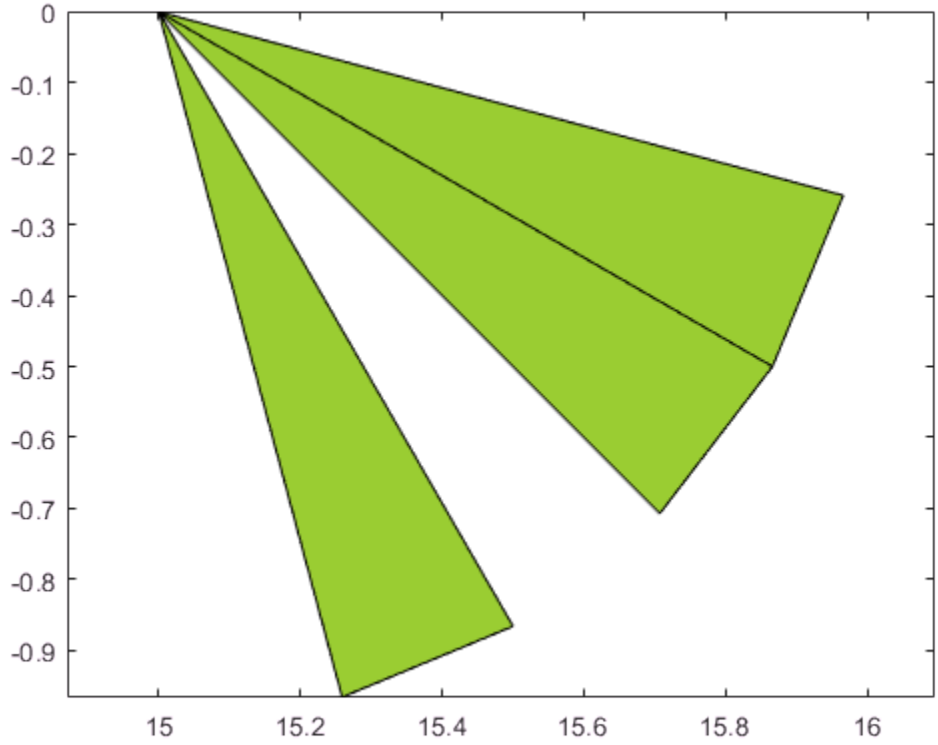

Compare this alpha shape to the one produced by the next smallest critical alpha value. The alpha shapes are unique.

```
shp.Alpha = alphaspec(length(alphaspec)-1);
plot(shp)
```

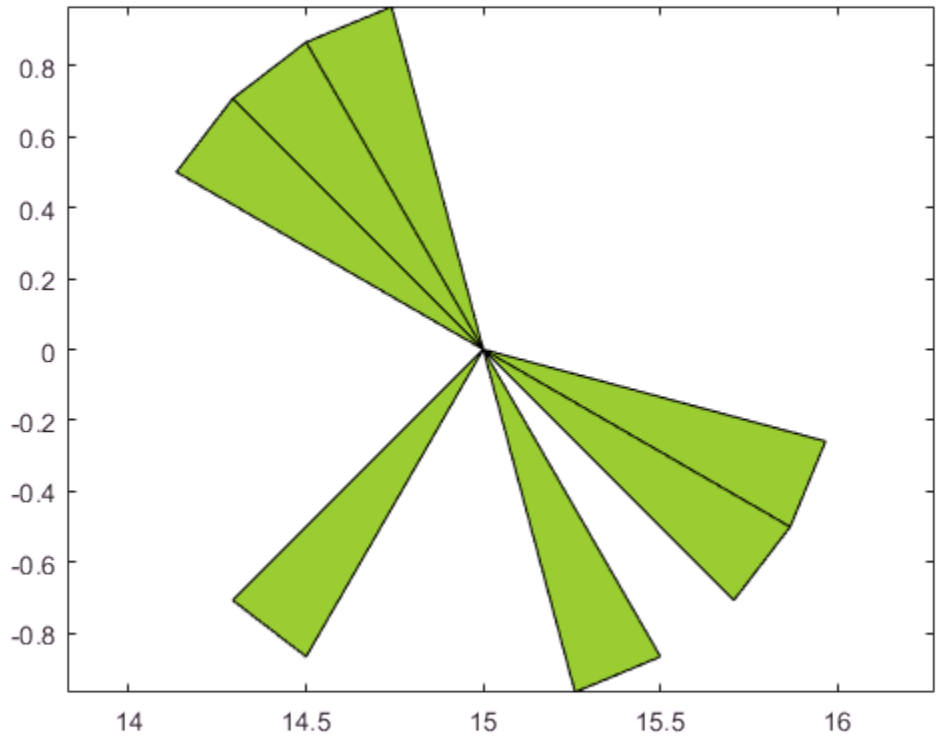

Input Arguments

shp — Alpha shape
`alphaShape` object

Alpha shape, specified as an `alphaShape` object. For more information, see `alphaShape`.

Example: `shp = alphaShape(x,y)` creates a 2-D `alphaShape` object from the `(x,y)` point coordinates.

Output Arguments

a — Alpha values for distinct alpha shapes

column vector

Alpha values for distinct alpha shapes, returned as a column vector in descending sorted order.

See Also

See Also

`alphaShape` | `plot`

Topics

alphaShape

Introduced in R2014b

alphaTriangulation

Triangulation that fills alpha shape

Syntax

```
tri = alphaTriangulation(shp)
tri = alphaTriangulation(shp,RegionID)

[tri,P] = alphaTriangulation( ___ )
```

Description

`tri = alphaTriangulation(shp)` returns a triangulation that defines the domain of the alpha shape. Each row in `tri` specifies a triangle or tetrahedron defined by vertex IDs (the row numbers of the `shp.Points` matrix).

`tri = alphaTriangulation(shp,RegionID)` returns a triangulation for a region of the alpha shape. `RegionID` is the ID for the region and $1 \le$ `RegionID` $\le$ `numRegions(shp)`.

`[tri,P] = alphaTriangulation( ___ )` also returns a matrix of vertex coordinates, `P`, using any of the previous syntaxes.

Examples

Compute Triangulation for 3-D Point Cloud

Create a set of 3-D points.

```
[x1, y1, z1] = sphere(24);
x1 = x1(:);
y1 = y1(:);
z1 = z1(:);
x2 = x1+5;
P = [x1 y1 z1; x2 y1 z1];
P = unique(P,'rows');
```

Create and plot an alpha shape for the point cloud using an alpha radius of 1.

```
shp = alphaShape(P,1);
plot(shp)
```

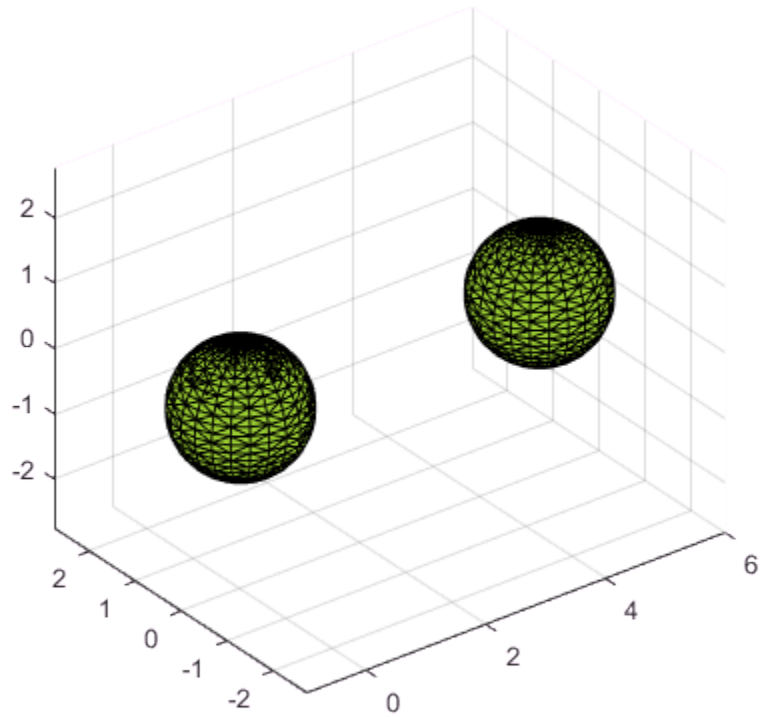

Use `alphaTriangulation` to recover the triangulation that defines the domain of the alpha shape.

```
tri = alphaTriangulation(shp);
```

Find the total number of tetrahedra that make up the alpha shape.

```
numtetrahedra = size(tri,1)
```

```
numtetrahedra = 3729
```

Input Arguments

shp — Alpha shape

alphaShape object

Alpha shape, specified as an alphaShape object. For more information, see alphaShape.

Example: shp = alphaShape(x,y) creates a 2-D alphaShape object from the (x,y) point coordinates.

RegionID — ID number for a region in the alpha shape

positive integer scalar

ID number for region in alpha shape, specified as a positive integer scalar between 1 and numRegions(shp).

An alpha shape can contain several smaller regions, depending on the point set and parameters. Each of these smaller regions is assigned a unique RegionID, which numbers the regions from the largest area or volume to the smallest. For example, consider a 3-D alpha shape with two regions. The region with the largest volume has a RegionID of 1, and the smaller region has a RegionID of 2.

Example: shp.RegionThreshold = area(shp,numRegions(shp)-2); suppresses the two smallest regions in 2-D alpha shape shp.

Data Types: double

Output Arguments

tri — Triangulation

matrix

Triangulation, returned as a matrix. tri is of size mtri-by-nv, where mtri is the number of triangles or tetrahedra in the alpha shape and nv is the number of vertices. The value of nv is 3 for 2-D alpha shapes and 4 for 3-D alpha shapes.

P — Vertex coordinates

matrix

Vertex coordinates, returned as a matrix. `P` is of size `N`-by-`dim`, where `N` is the number of points in the alpha shape and `dim` is either `2` or `3` (for either a 2-D or 3-D alpha shape).

See Also

See Also

`alphaShape` | `plot` | triangulation | `triplot`

Topics

alphaShape

Introduced in R2014b

area

Area of 2-D alpha shape

Syntax

```
A = area(shp)
A = area(shp,RegionID)
```

Description

`A = area(shp)` returns the area of 2-D alpha shape `shp`.

`A = area(shp,RegionID)` returns the area of a region of the alpha shape. `RegionID` is the ID for the region and $1 \le$ `RegionID` $\le$ `numRegions(shp)`.

Examples

Find Area of 2-D Alpha Shape

Create a set of 2-D points.

```
th = (pi/12:pi/12:2*pi)';
x1 = [reshape(cos(th)*(1:5), numel(cos(th)*(1:5)),1); 0];
y1 = [reshape(sin(th)*(1:5), numel(sin(th)*(1:5)),1); 0];
x = [x1; x1+15;];
y = [y1; y1];
```

Create and plot an alpha shape using an alpha radius of 2.5.

```
shp = alphaShape(x,y,2.5);
plot(shp)
```

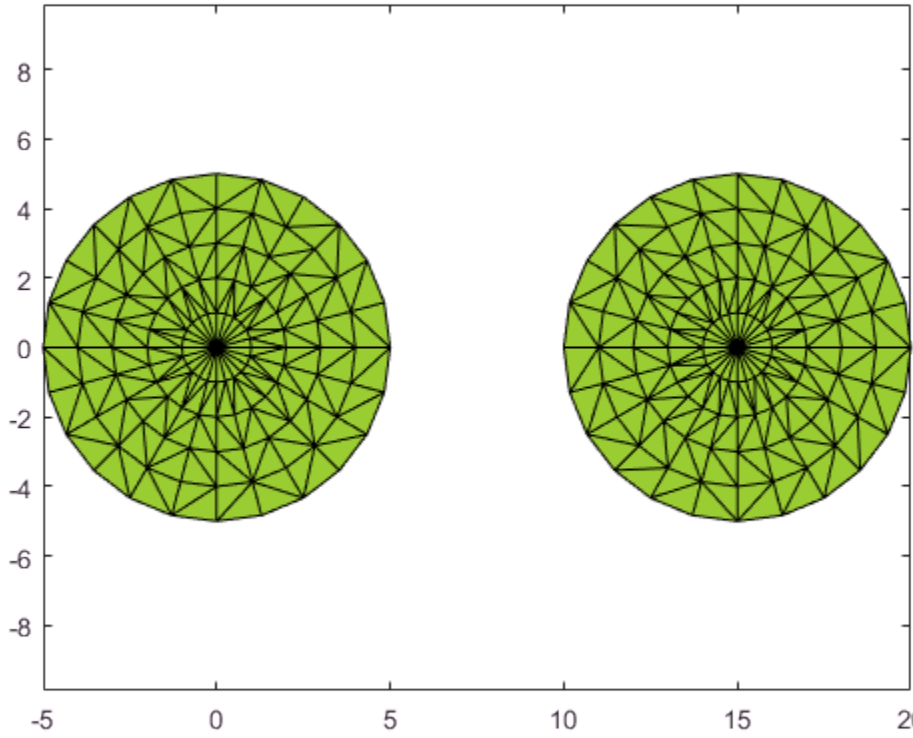

Compute the area of the alpha shape.

```
totalarea = area(shp)
```

```
totalarea = 155.2914
```

Compute the areas of each of the two regions separately.

```
regionareas = area(shp, 1:numRegions(shp))
```

```
regionareas =

   77.6457   77.6457
```

Input Arguments

shp — Alpha shape

alphaShape object

Alpha shape, specified as an alphaShape object. For more information, see alphaShape.

Example: shp = alphaShape(x,y) creates a 2-D alphaShape object from the (x,y) point coordinates.

RegionID — ID number for a region in the alpha shape

positive integer scalar

ID number for region in alpha shape, specified as a positive integer scalar between 1 and numRegions(shp).

An alpha shape can contain several smaller regions, depending on the point set and parameters. Each of these smaller regions is assigned a unique RegionID, which numbers the regions from the largest area or volume to the smallest. For example, consider a 3-D alpha shape with two regions. The region with the largest volume has a RegionID of 1, and the smaller region has a RegionID of 2.

Example: shp.RegionThreshold = area(shp,numRegions(shp)-2); suppresses the two smallest regions in 2-D alpha shape shp.

Data Types: double

See Also

See Also

alphaShape | criticalAlpha | perimeter | volume

Topics

alphaShape

Introduced in R2014b

boundaryFacets

Boundary facets of alpha shape

Syntax

```
bf = boundaryFacets(shp)
bf = boundaryFacets(shp,RegionID)

[bf,P] = boundaryFacets( ___ )
```

Description

`bf = boundaryFacets(shp)` returns a matrix representing the facets that make up the boundary of the alpha shape. The facets represent edge segments in 2-D and triangles in 3-D. The vertices of the facets index into the `shp.Points` matrix.

`bf = boundaryFacets(shp,RegionID)` returns the boundary facets for a region of the alpha shape. `RegionID` is the ID for the region and `1` ≤ `RegionID` ≤ `numRegions(shp)`.

`[bf,P] = boundaryFacets( ___ )` also returns a matrix of vertex coordinates, `P`, using any of the previous syntaxes.

Examples

Find Boundary of 3-D Alpha Shape

Create a set of 3-D points.

```
[x1, y1, z1] = sphere(24);
x1 = x1(:);
y1 = y1(:);
z1 = z1(:);
x2 = x1+5;
P = [x1 y1 z1; x2 y1 z1];
```

```
P = unique(P,'rows');
```

Create and plot an alpha shape using an alpha radius of 1.5.

```
shp = alphaShape(P,1.5);
plot(shp)
axis equal
```

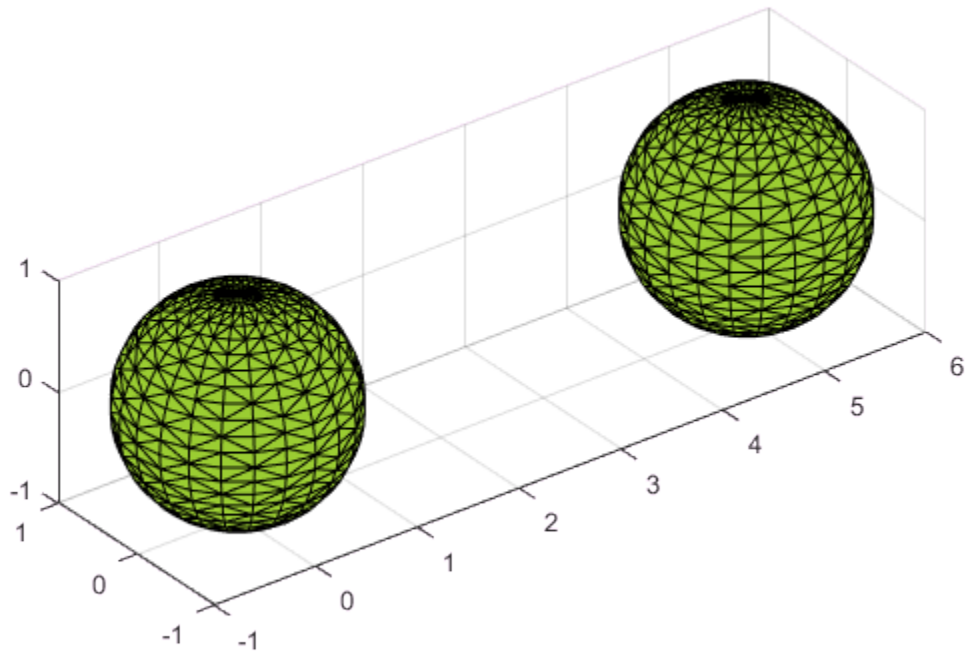

Compute and plot only the boundary of the alpha shape.

```
[tri, xyz] = boundaryFacets(shp);
trisurf(tri,xyz(:,1),xyz(:,2),xyz(:,3),...
    'FaceColor','cyan','FaceAlpha',0.3)
axis equal
```

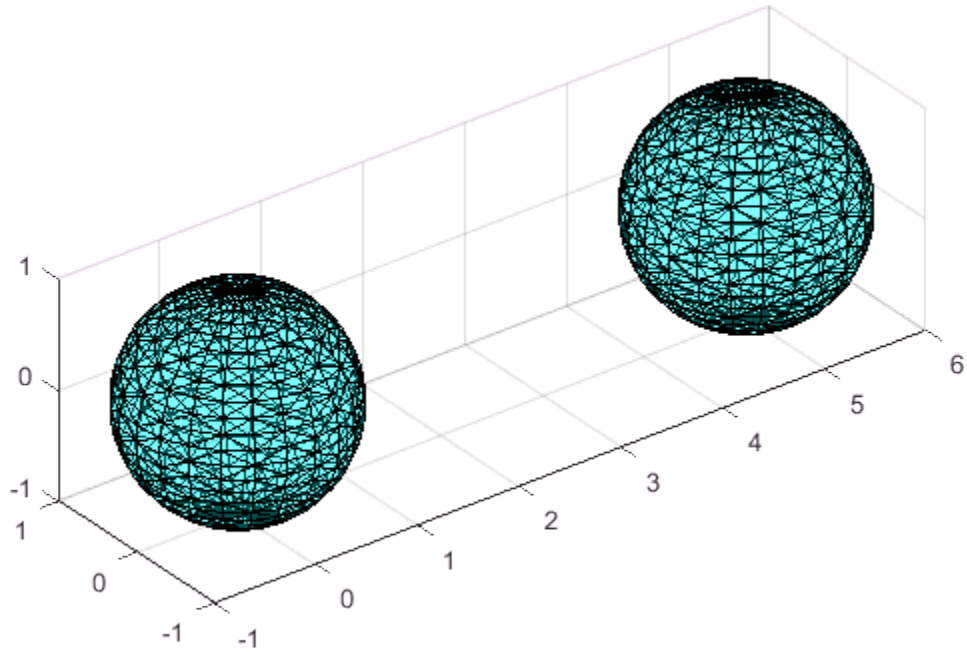

Input Arguments

shp — Alpha shape

`alphaShape` object

Alpha shape, specified as an `alphaShape` object. For more information, see `alphaShape`.

Example: `shp = alphaShape(x,y)` creates a 2-D `alphaShape` object from the `(x,y)` point coordinates.

`RegionID` — ID number for a region in the alpha shape

positive integer scalar

ID number for region in alpha shape, specified as a positive integer scalar between `1` and `numRegions(shp)`.

An alpha shape can contain several smaller regions, depending on the point set and parameters. Each of these smaller regions is assigned a unique `RegionID`, which numbers the regions from the largest area or volume to the smallest. For example, consider a 3-D alpha shape with two regions. The region with the largest volume has a `RegionID` of 1, and the smaller region has a `RegionID` of 2.

Example: `shp.RegionThreshold = area(shp,numRegions(shp)-2);` suppresses the two smallest regions in 2-D alpha shape `shp`.

Data Types: `double`

Output Arguments

`bf` — Boundary facets

matrix

Boundary facets, returned as a matrix. `bf` is of size `m`-by-`n`, where `m` is the number of boundary facets and `n` is the number of vertices per facet.

`P` — Vertex coordinates

matrix

Vertex coordinates, returned as a matrix. `P` is of size `N`-by-`dim`, where `N` is the number of points on the boundary of the alpha shape and `dim` is either `2` or `3` (for either a 2-D or 3-D alpha shape).

See Also

See Also

`alphaShape` | `plot` | triangulation

Topics

alphaShape

Introduced in R2014b

criticalAlpha

Alpha radius defining a critical transition in the shape

Syntax

```
a = criticalAlpha(shp,type)
```

Description

`a = criticalAlpha(shp,type)` returns the critical alpha radius that produces a notable transition in the alpha shape. Specifying `type` as `'all-points'` returns the smallest alpha radius producing an alpha shape that encloses all points. Specifying `type` as `'one-region'` returns the smallest alpha radius producing an alpha shape that encloses all points *and* has only one region.

Examples

Find Critical Alpha Values of 2-D Point Cloud

Create and plot a set of 2-D points.

```
th = (pi/12:pi/12:2*pi)';
x1 = [reshape(cos(th)*(1:5), numel(cos(th)*(1:5)),1); 0];
y1 = [reshape(sin(th)*(1:5), numel(sin(th)*(1:5)),1); 0];
x = [x1; x1+15;];
y = [y1; y1];
plot(x,y,'.')
axis equal
```

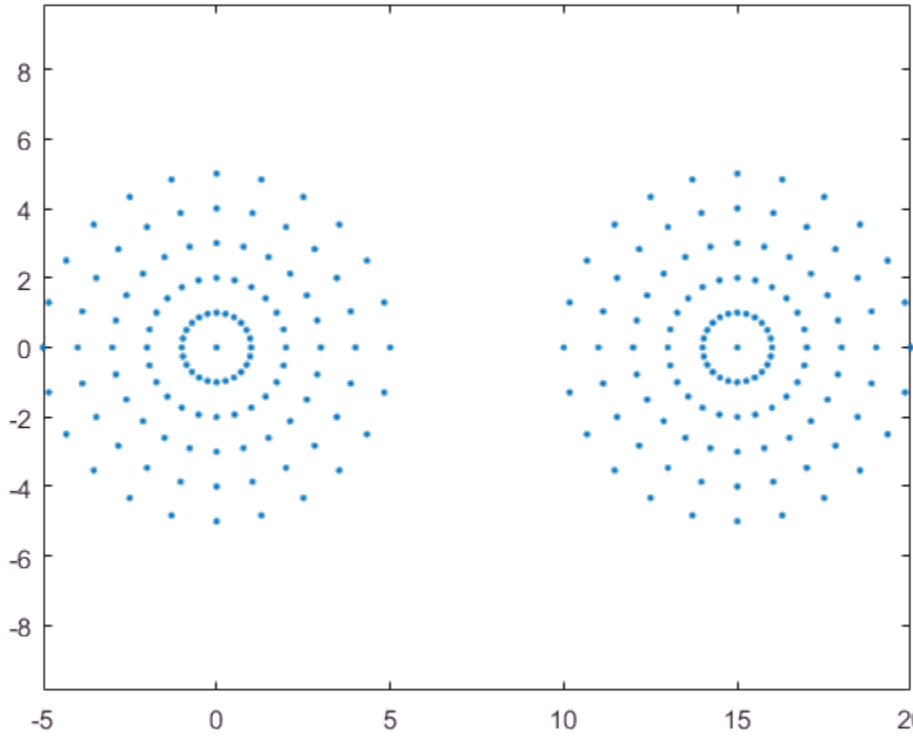

Create an alpha shape using the default alpha radius.

```
shp = alphaShape(x,y);
```

Compute the smallest alpha radius that produces an alpha shape enclosing all of the points and plot the corresponding alpha shape.

```
pc = criticalAlpha(shp,'all-points');
shp.Alpha = pc;
plot(shp)
```

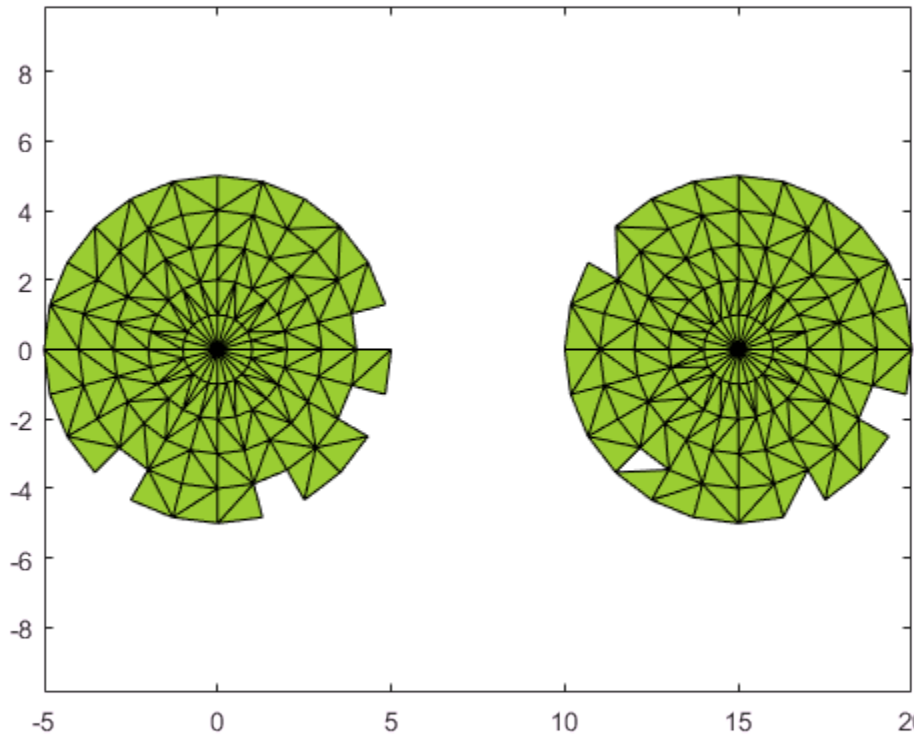

Compute the smallest alpha radius that produces an alpha shape enclosing all of the points and having only one region.

```
shp = alphaShape(x,y);
pc = criticalAlpha(shp,'one-region');
shp.Alpha = pc;
plot(shp)
```

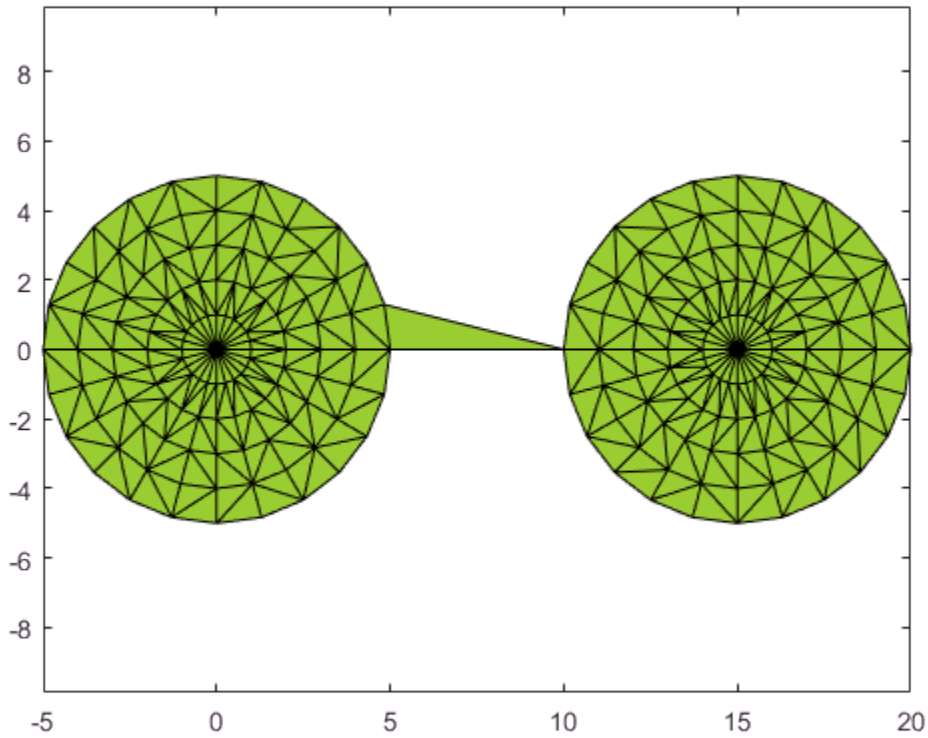

Input Arguments

shp — Alpha shape
`alphaShape` object

Alpha shape, specified as an `alphaShape` object. For more information, see `alphaShape`.

Example: `shp = alphaShape(x,y)` creates a 2-D `alphaShape` object from the `(x,y)` point coordinates.

`type` — Type of critical transition

`'all-points'` | `'one-region'`

Type of critical transition, specified as either `'all-points'` or `'one-region'`.

- `'all-points'` corresponds to the smallest alpha radius producing an alpha shape that encloses all points.
- `'one-region'` corresponds to the smallest alpha radius producing an alpha shape that encloses all points *and* has only one region.

Data Types: `char`

Output Arguments

`a` — Critical alpha radius

scalar

Critical alpha radius, returned as a scalar. `a` is the value of the alpha radius that produces an alpha shape, which either encloses all points (if `type` is `'all-points'`), or encloses all points within a single region (if `type` is `'one-region'`).

After using `criticalAlpha` to find `a`, you can make the alpha radius of `shp` equal to `a` by typing `shp.Alpha = a`.

See Also

See Also

`alphaShape` | `alphaSpectrum`

Topics

alphaShape

Introduced in R2014b

inShape

Determine if point is inside alpha shape

Syntax

```
tf = inShape(shp,qx,qy)
tf = inShape(shp,qx,qy,qz)
tf = inShape(shp,QP)
tf = inShape( ___ ,RegionID)
[tf,ID] = inShape( ___ )
```

Description

`tf = inShape(shp,qx,qy)` returns logical `1` (`true`) values for the 2-D query points `(qx,qy)` that are within 2-D alpha shape `shp`. Otherwise, `inShape` returns values of logical `0` (`false`). The `qx` and `qy` arguments are numeric arrays whose corresponding elements specify the `(x,y)` query point coordinates.

`tf = inShape(shp,qx,qy,qz)` tests whether the 3-D query points `(qx,qy,qz)` are within 3-D alpha shape `shp`.

`tf = inShape(shp,QP)` specifies the 2-D or 3-D query point coordinates in a matrix with 2 or 3 columns.

`tf = inShape( ___ ,RegionID)` tests whether the query points are within a specific region of the alpha shape, using any of the previous syntaxes. `RegionID` is the ID for the region and $1 \le$ `RegionID` $\le$ `numRegions(shp)`.

`[tf,ID] = inShape( ___ )` also returns the IDs for the regions in the alpha shape that contain the query points. `ID` is `NaN` for query points that are not in the alpha shape.

Examples

Query Points Inside and Outside of 2-D Alpha Shape

Create a set of 2-D points.

```
th = (pi/12:pi/12:2*pi)';
x1 = [reshape(cos(th)*(1:5), numel(cos(th)*(1:5)),1); 0];
y1 = [reshape(sin(th)*(1:5), numel(sin(th)*(1:5)),1); 0];
x = [x1; x1+15;];
y = [y1; y1];
```

Create and plot an alpha shape using an alpha radius of 2.5.

```
shp = alphaShape(x,y,2.5);
plot(shp)
```

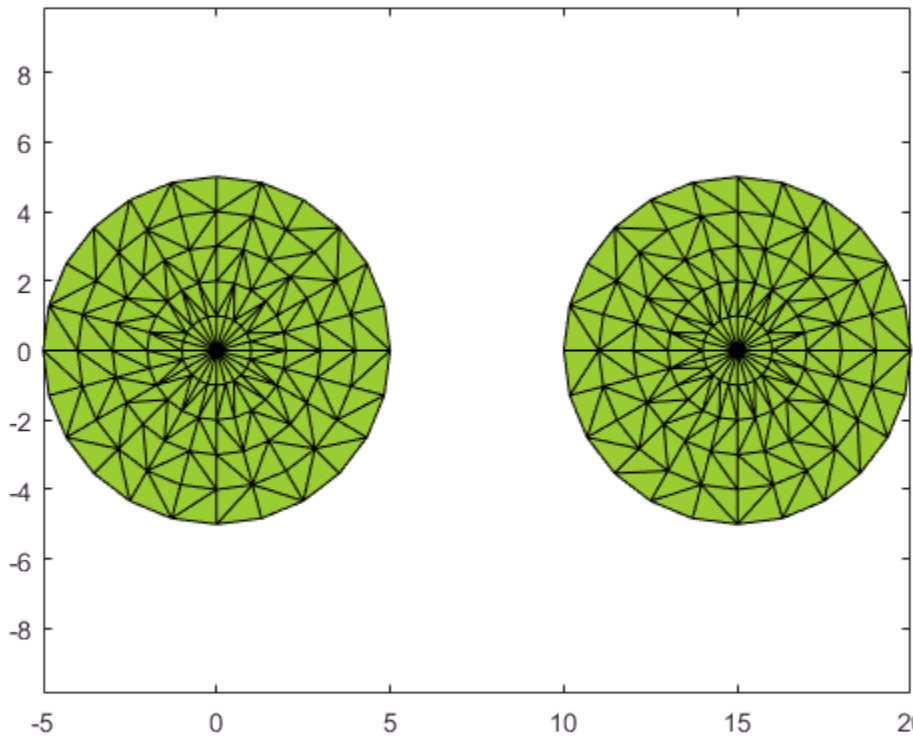

Create a Cartesian grid of query points near the alpha shape.

```
[qx, qy] = meshgrid(-10:2:25, -10:2:10);
```

Check if the query points are inside of the alpha shape, and if so, plot them red. Plot the query points that lie outside of the alpha shape in blue.

```
in = inShape(shp,qx,qy);
plot(shp)
hold on
plot(qx(in),qy(in),'r.')
plot(qx(~in),qy(~in),'b.')
```

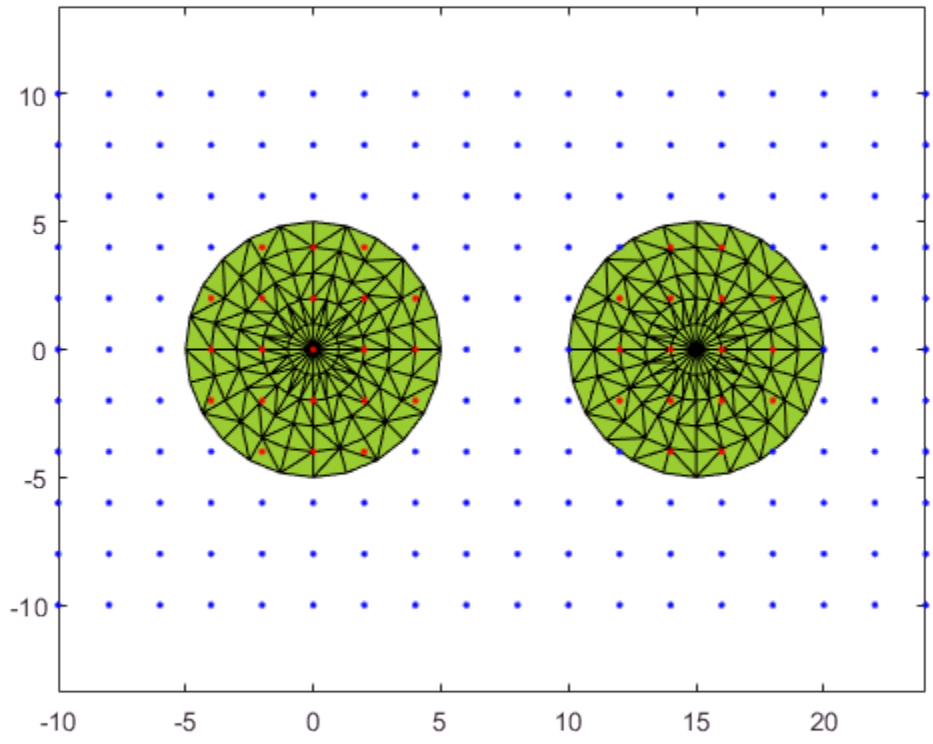

Input Arguments

shp — Alpha shape

alphaShape object

Alpha shape, specified as an alphaShape object. For more information, see alphaShape.

Example: shp = alphaShape(x,y) creates a 2-D alphaShape object from the (x,y) point coordinates.

qx — Query point x-coordinates

numeric array

Query point x-coordinates, specified as a numeric array.

Data Types: double

qy — Query point y-coordinates

numeric array

Query point y-coordinates, specified as a numeric array.

Data Types: double

qz — Query point z-coordinates

numeric array

Query point z-coordinates, specified as a numeric array.

Data Types: double

QP — Query point coordinates

matrix with two columns | matrix with three columns

Query point coordinates, specified as a matrix with two columns (2-D) or a matrix with three columns (3-D).

- For 2-D, the columns of QP represent x and y coordinates, respectively.
- For 3-D, the columns of QP represent x, y, and z coordinates, respectively.

Data Types: double

`RegionID` — ID number for a region in the alpha shape

positive integer scalar

ID number for region in alpha shape, specified as a positive integer scalar between `1` and `numRegions(shp)`.

An alpha shape can contain several smaller regions, depending on the point set and parameters. Each of these smaller regions is assigned a unique `RegionID`, which numbers the regions from the largest area or volume to the smallest. For example, consider a 3-D alpha shape with two regions. The region with the largest volume has a `RegionID` of 1, and the smaller region has a `RegionID` of 2.

Example: `shp.RegionThreshold = area(shp,numRegions(shp)-2);` suppresses the two smallest regions in 2-D alpha shape `shp`.

Data Types: `double`

Output Arguments

`tf` — Containment status of query points

logical array

Status of the query points, returned as a logical array. The size of `tf` is equal to the size of the inputs that specify the query points (`qx`, `qy`, `qz`, or `QP`).

`inShape` returns logical `1` (`true`) values for points that are within the alpha shape or exactly on the boundary.

`ID` — IDs of the regions containing the query points

numeric array

IDs of regions containing query points, returned as a numeric array. `ID` is the same size as `tf`.

See Also

See Also

`alphaShape` | `plot`

Topics

alphaShape

Introduced in R2014b

nearestNeighbor

Determine nearest alpha shape boundary point

Syntax

```
I = nearestNeighbor(shp,qx,qy)
I = nearestNeighbor(shp,qx,qy,qz)
I = nearestNeighbor(shp,QP)

I = nearestNeighbor( ___ ,RegionID)

[I,D] = nearestNeighbor( ___ )
```

Description

`I = nearestNeighbor(shp,qx,qy)`, for a 2-D alpha shape `shp`, returns the indices of points on the boundary of `shp` closest to the query points. `I` is the array of nearest neighbor indices where each index corresponds to the row index in `shp.Points`. The `qx` and `qy` query coordinates must be the same size.

`I = nearestNeighbor(shp,qx,qy,qz)`, for a 3-D alpha shape, returns the indices of the boundary points of `shp` closest to `(qx,qy,qz)` and corresponds to the row indices in `shp.Points`. The `qx`, `qy`, and `qz` query coordinates must be the same size.

`I = nearestNeighbor(shp,QP)` specifies the query points as a matrix `QP`. For a 2-D alpha shape, `QP` is a matrix with two columns representing the `qx` and `qy` coordinates. For a 3-D alpha shape, `QP` has three columns representing the `qx`, `qy`, and `qz` coordinates.

`I = nearestNeighbor( ___ ,RegionID)` returns the index of the nearest point that lies on the boundary of the region specified by `RegionID`, where $1 \le$ `RegionID` $\le$ `numRegions(shp)`. You can include any of the input arguments in the previous syntaxes.

`[I,D] = nearestNeighbor( ___ )` additionally returns the Euclidean distance between the query point and its nearest neighbor. `D` has the same size as `I`.

Examples

Nearest Alpha Shape Boundary Point

Create a set of 2-D points.

```
th = (pi/12:pi/12:2*pi)';
x1 = [reshape(cos(th)*(1:5), numel(cos(th)*(1:5)),1); 0];
y1 = [reshape(sin(th)*(1:5), numel(sin(th)*(1:5)),1); 0];
x = [x1; x1+15];
y = [y1; y1];
```

Create and plot an alpha shape with alpha radius equal to 1.

```
shp = alphaShape(x,y,1);
plot(shp)
hold on
```

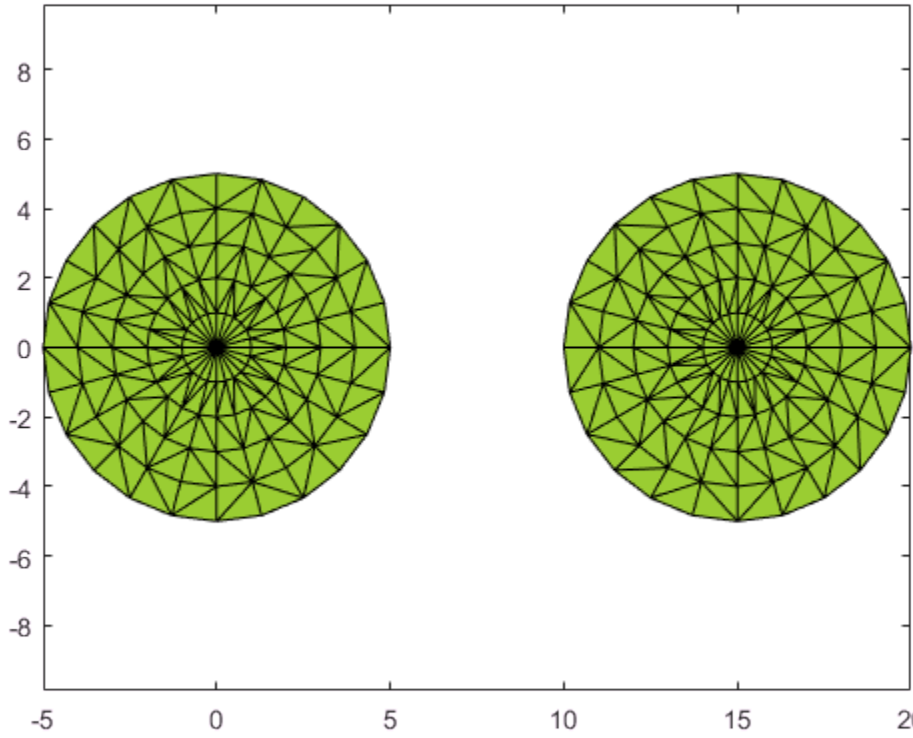

Compute the nearest `shp` boundary point to the query point `QP`. Plot the query point in blue and the nearest boundary neighbor in red.

```
QP = [6 3];
plot(QP(1),QP(2),'b.','MarkerSize',10)
hold on
I = nearestNeighbor(shp, QP);
plot(shp.Points(I,1),shp.Points(I,2),'r.','MarkerSize',10)
```

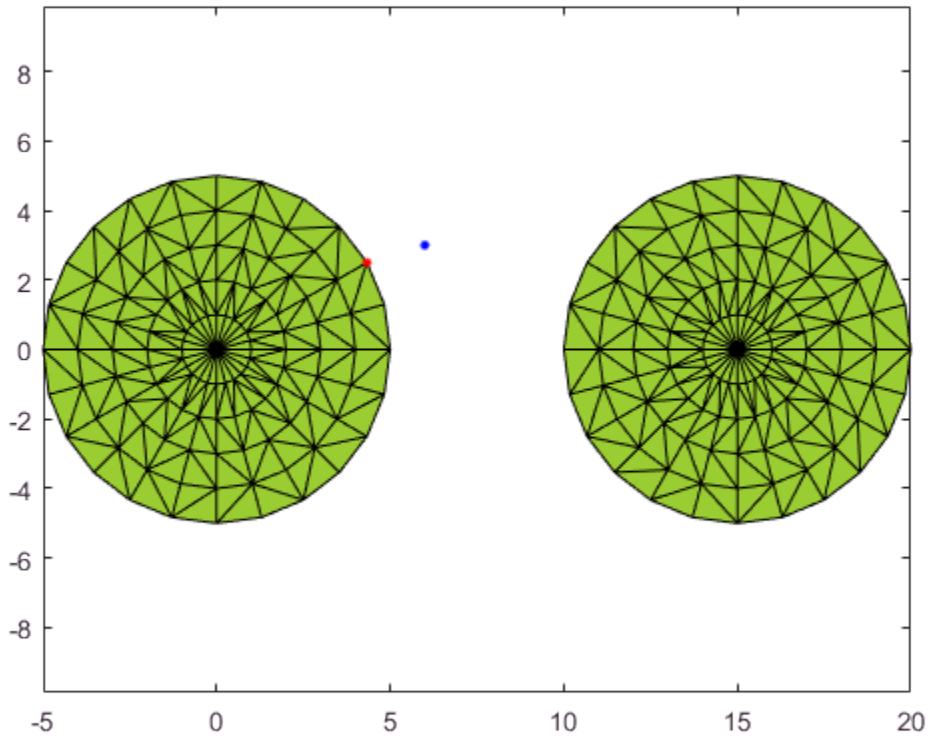

Input Arguments

shp — Alpha shape
`alphaShape` object

Alpha shape, specified as an `alphaShape` object. For more information, see `alphaShape`.

Example: `shp = alphaShape(x,y)` creates a 2-D `alphaShape` object from the `(x,y)` point coordinates.

`qx` — Query point x-coordinates
numeric array

Query point x-coordinates, specified as a numeric array.

Data Types: `double`

`qy` — Query point y-coordinates
numeric array

Query point y-coordinates, specified as a numeric array.

Data Types: `double`

`qz` — Query point z-coordinates
numeric array

Query point z-coordinates, specified as a numeric array.

Data Types: `double`

`QP` — Query point coordinates
two-column matrix | three-column matrix

Query point coordinates, specified as a two-column matrix or a three-column matrix.

- For 2-D, the columns of `P` represent `qx` and `qy` coordinates, respectively.
- For 3-D, the columns of `P` represent `qx`, `qy`, and `qz` coordinates, respectively.

Data Types: `double`

`RegionID` — ID number for a region in the alpha shape
positive integer scalar

ID number for region in alpha shape, specified as a positive integer scalar between `1` and `numRegions(shp)`.

An alpha shape can contain several smaller regions, depending on the point set and parameters. Each of these smaller regions is assigned a unique `RegionID`, which numbers the regions from the largest area or volume to the smallest. For example, consider a 3-D alpha shape with two regions. The region with the largest volume has a `RegionID` of 1, and the smaller region has a `RegionID` of 2.

Example: `shp.RegionThreshold = area(shp,numRegions(shp)-2);` suppresses the two smallest regions in 2-D alpha shape `shp`.

Data Types: `double`

Output Arguments

`I` — Nearest neighbor indices

integer-valued array

Nearest neighbor indices, returned as an integer-valued array. The indices correspond to the row index of `shp.Points` and indicate the points on the boundary of `shp` that are closest to the given query points.

`D` — Distance from query points to nearest neighbors

numeric array

Distance from query points to nearest neighbors, returned as a numeric array. `D` is the 2-D or 3-D Euclidean distance and is the same size as `I`.

See Also

See Also

`alphaShape`

Topics

alphaShape

Introduced in R2015a

numRegions

Number of regions in alpha shape

Syntax

```
N = numRegions(shp)
```

Description

`N = numRegions(shp)` returns the number of distinct regions that make up the alpha shape. For an alpha radius of `Inf`, the alpha shape is the convex hull, and the number of regions is one. As the value of the alpha radius decreases the shape can break into separate regions, depending on the point set.

Examples

Find Number of Regions in 2-D Alpha Shape

Create and plot a set of 2-D points.

```
th = (pi/12:pi/12:2*pi)';
x1 = [reshape(cos(th)*(1:5), numel(cos(th)*(1:5)),1); 0];
y1 = [reshape(sin(th)*(1:5), numel(sin(th)*(1:5)),1); 0];
x = [x1; x1+15;];
y = [y1; y1];
plot(x,y,'.')
axis equal
```

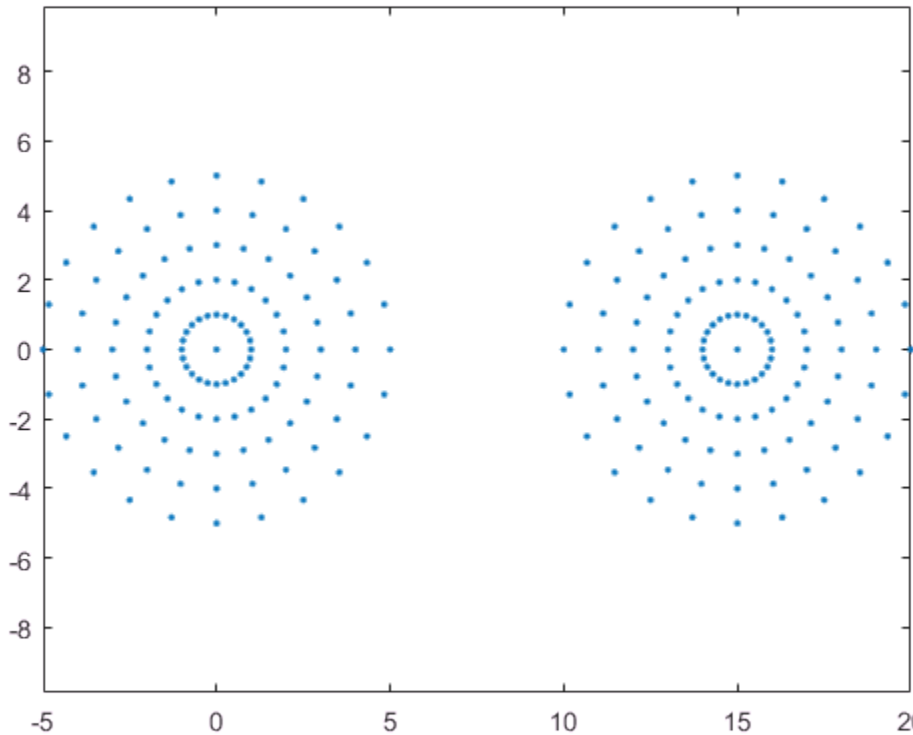

Create an alpha shape using an alpha radius of 7 and query the number of distinct regions in the shape.

```
shp = alphaShape(x,y,7);
nregions = numRegions(shp)
```

```
nregions = 1
```

Use a smaller alpha radius of 2.5 to better capture the boundary and then retrieve the new number of distinct regions.

```
shp.Alpha = 2.5;
nregions = numRegions(shp)
```

```
nregions = 2
```

Plot the alpha shape to check the boundary quality.

```
plot(shp)
```

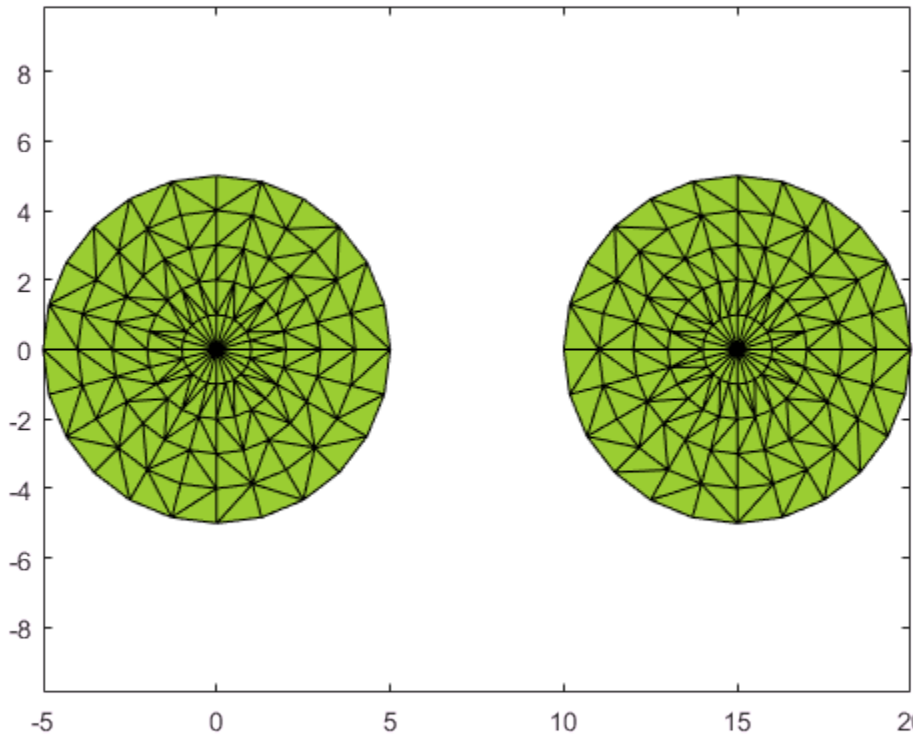

Input Arguments

shp — Alpha shape
`alphaShape` object

Alpha shape, specified as an `alphaShape` object. For more information, see `alphaShape`.

Example: `shp = alphaShape(x,y)` creates a 2-D `alphaShape` object from the `(x,y)` point coordinates.

See Also

See Also

`alphaShape`

Topics

alphaShape

Introduced in R2014b

perimeter

Perimeter of 2-D alpha shape

Syntax

```
L = perimeter(shp)
L = perimeter(shp,RegionID)
```

Description

`L = perimeter(shp)` returns the total perimeter of 2-D alpha shape `shp`, including the perimeter of any interior holes in the alpha shape.

`L = perimeter(shp,RegionID)` returns the perimeter of a region within the alpha shape. `RegionID` is the ID for the region and `1` ≤ `RegionID` ≤ `numRegions(shp)`.

Examples

Find Perimeter of 2-D Alpha Shape

Create a set of 2-D points.

```
th = (pi/12:pi/12:2*pi)';
x1 = [reshape(cos(th)*(1:5), numel(cos(th)*(1:5)),1); 0];
y1 = [reshape(sin(th)*(1:5), numel(sin(th)*(1:5)),1); 0];
x = [x1; x1+15;];
y = [y1; y1];
```

Create and plot an alpha shape using an alpha radius of 2.5.

```
shp = alphaShape(x,y,2.5);
plot(shp)
```

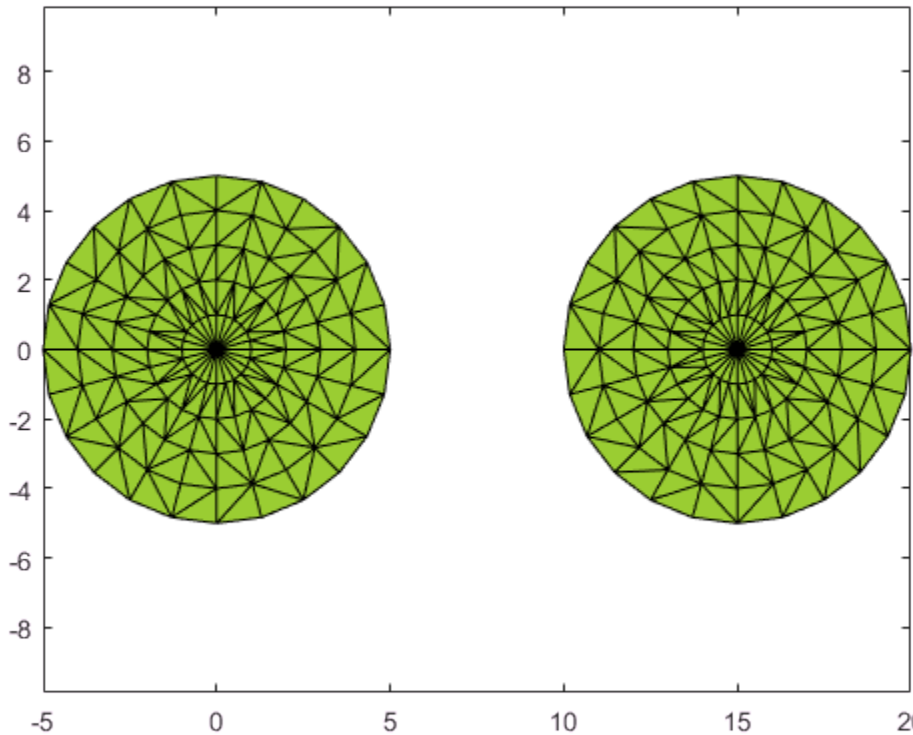

Compute the perimeter of the alpha shape.

```
totalperim = perimeter(shp)
```

```
totalperim = 62.6526
```

Compute the perimeters of each of the two regions separately.

```
regionperims = perimeter(shp, 1:numRegions(shp))
```

```
regionperims =

   31.3263   31.3263
```

Input Arguments

`shp` — 2-D alpha shape

`alphaShape` object

2-D alpha shape, specified as an `alphaShape` object. For more information, see `alphaShape`.

Example: `shp = alphaShape(x,y)` creates a 2-D `alphaShape` object from the `(x,y)` point coordinates.

`RegionID` — ID number for a region in the alpha shape

positive integer scalar

ID number for region in alpha shape, specified as a positive integer scalar between `1` and `numRegions(shp)`.

An alpha shape can contain several smaller regions, depending on the point set and parameters. Each of these smaller regions is assigned a unique `RegionID`, which numbers the regions from the largest area or volume to the smallest. For example, consider a 3-D alpha shape with two regions. The region with the largest volume has a `RegionID` of 1, and the smaller region has a `RegionID` of 2.

Example: `shp.RegionThreshold = area(shp,numRegions(shp)-2);` suppresses the two smallest regions in 2-D alpha shape `shp`.

Data Types: `double`

See Also

See Also

`alphaShape` | `area` | `criticalAlpha`

Topics

alphaShape

Introduced in R2014b

plot (alphashape)

Plot alpha shape

Syntax

```
plot(shp)
plot(shp,Name,Value)
h = plot( ___ )
```

Description

`plot(shp)` plots alpha shape `shp` in a figure window.

`plot(shp,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments. For a complete list of allowed `Name,Value` pairs, see Patch Properties.

`h = plot( ___ )` returns a handle to a `Patch` object using any of the previous syntaxes.

Examples

Plot 3-D Alpha Shape and Modify Patch Properties

Create a set of 3-D points.

```
[x1, y1, z1] = sphere(24);
x1 = x1(:);
y1 = y1(:);
z1 = z1(:);
x2 = x1+5;
P = [x1 y1 z1; x2 y1 z1];
P = unique(P,'rows');
```

Create and plot an alpha shape using an alpha radius of 1.5.

```
shp = alphaShape(P,1.5);
plot(shp)
```

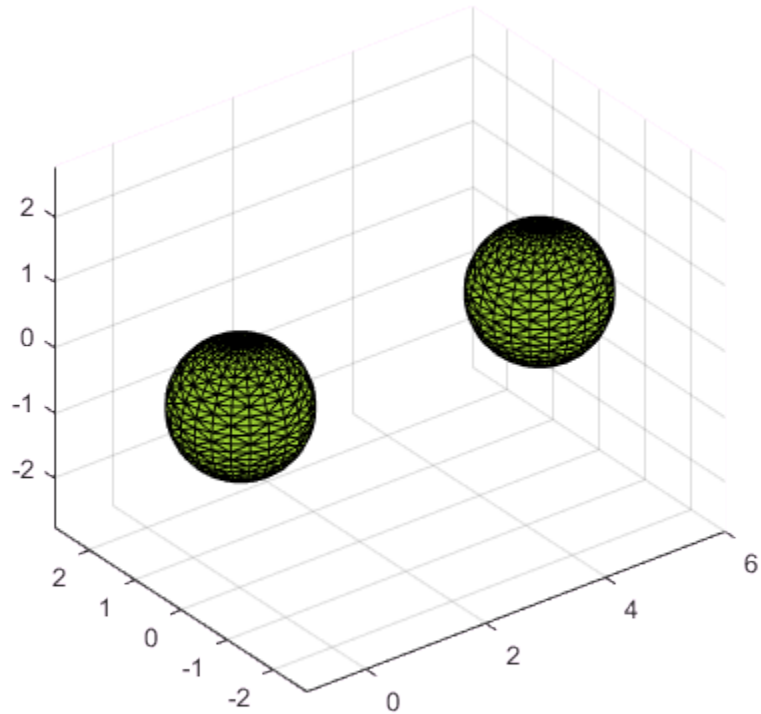

Plot the alpha shape with a specified color and transparency factor.

```
plot(shp,'FaceColor','red','FaceAlpha',0.1)
```

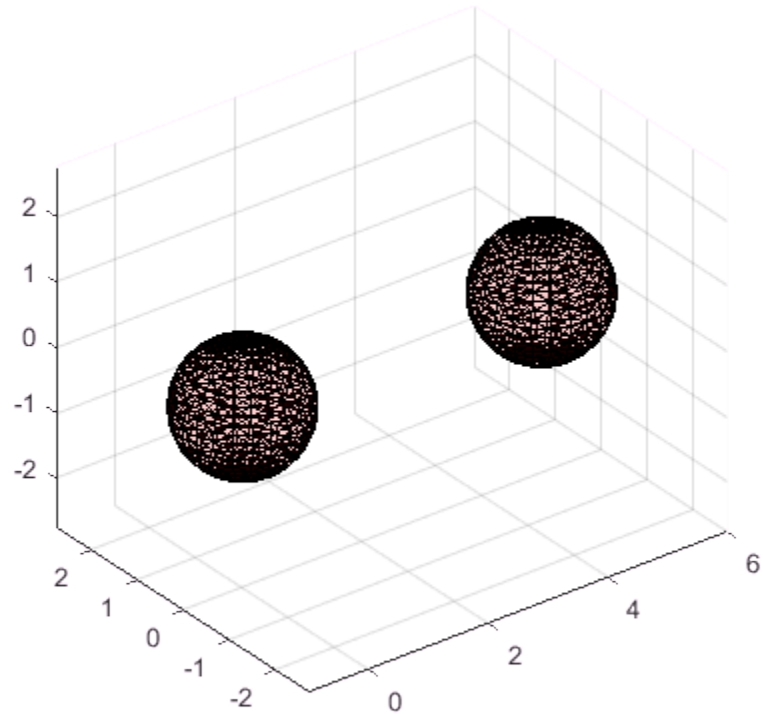

Input Arguments

shp — Alpha shape
`alphaShape` object

Alpha shape, specified as an `alphaShape` object. For more information, see `alphaShape`.

Example: `shp = alphaShape(x,y)` creates a 2-D `alphaShape` object from the `(x,y)` point coordinates.

Output Arguments

h — Handle to `Patch` object
handle

Handle to `Patch` object, returned as a handle. For more information, see "Introduction to Patch Objects".

See Also

See Also
`alphaShape` | `patch`

Topics
alphaShape

Introduced in R2014b

surfaceArea

Surface area of 3-D alpha shape

Syntax

```
A = surfaceArea(shp)
A = surfaceArea(shp,RegionID)
```

Description

`A = surfaceArea(shp)` returns the total surface area of 3-D alpha shape `shp`, including the surface area of any interior voids in the alpha shape.

`A = surfaceArea(shp,RegionID)` returns the surface area of a region of the alpha shape. `RegionID` is the ID for the region and `1` ≤ `RegionID` ≤ `numRegions(shp)`.

Examples

Find Surface Area of 3-D Alpha Shape

Create a set of 3-D points.

```
[x1, y1, z1] = sphere(24);
x1 = x1(:);
y1 = y1(:);
z1 = z1(:);
x2 = x1+5;
P = [x1 y1 z1; x2 y1 z1];
P = unique(P,'rows');
```

Create and plot an alpha shape using an alpha radius of 1.5.

```
shp = alphaShape(P,1.5);
plot(shp)
```

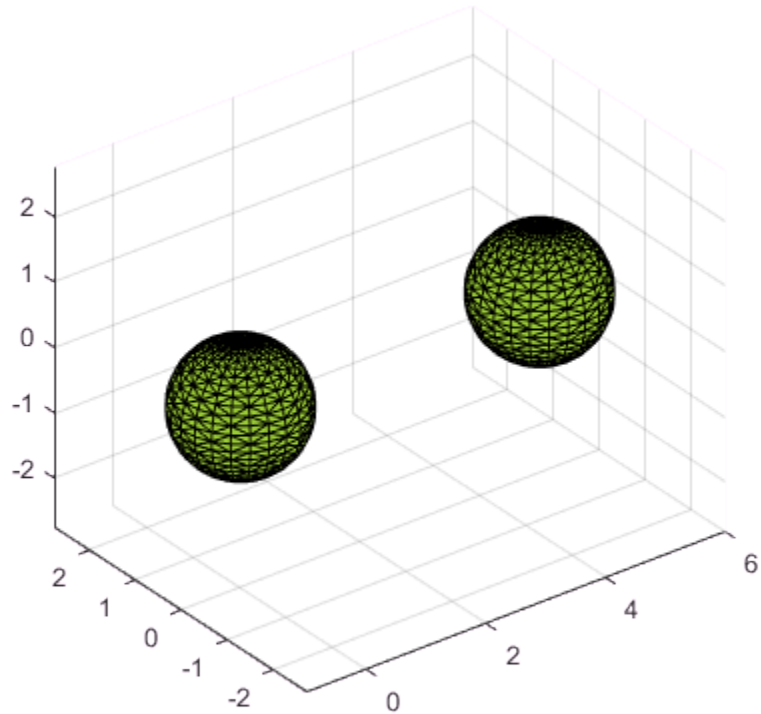

Compute the surface area of the alpha shape.

```
totalsurfarea = surfaceArea(shp)
```

```
totalsurfarea = 24.9361
```

Compute the surface area of each region separately.

```
regionsurfareas = surfaceArea(shp, 1:numRegions(shp))
```

```
regionsurfareas =

   12.4680   12.4680
```

Input Arguments

shp — 3-D alpha shape

alphaShape object

3-D alpha shape, specified as an alphaShape object. For more information, see alphaShape

Example: shp = alphaShape(x,y,z) creates a 3-D alphaShape object from the (x,y,z) point coordinates.

RegionID — ID number for a region in the alpha shape

positive integer scalar

ID number for region in alpha shape, specified as a positive integer scalar between 1 and numRegions(shp).

An alpha shape can contain several smaller regions, depending on the point set and parameters. Each of these smaller regions is assigned a unique RegionID, which numbers the regions from the largest area or volume to the smallest. For example, consider a 3-D alpha shape with two regions. The region with the largest volume has a RegionID of 1, and the smaller region has a RegionID of 2.

Example: shp.RegionThreshold = area(shp,numRegions(shp)-2); suppresses the two smallest regions in 2-D alpha shape shp.

Data Types: double

See Also

See Also

alphaShape | area | volume

Topics

alphaShape

Introduced in R2014b

volume

Volume of 3-D alpha shape

Syntax

```
V = volume(shp)
V = volume(shp,RegionID)
```

Description

`V = volume(shp)` returns the volume of 3-D alpha shape `shp`.

`V = volume(shp,RegionID)` returns the volume of a region of the alpha shape. `RegionID` is the ID for the region and $1 \le$ `RegionID` $\le$ `numRegions(shp)`.

Examples

Find Volume of 3-D Alpha Shape

Create a set of 3-D points.

```
[x1, y1, z1] = sphere(24);
x1 = x1(:);
y1 = y1(:);
z1 = z1(:);
x2 = x1+5;
P = [x1 y1 z1; x2 y1 z1];
P = unique(P,'rows');
```

Create and plot an alpha shape using an alpha radius of 1.5.

```
shp = alphaShape(P,1.5);
plot(shp)
```

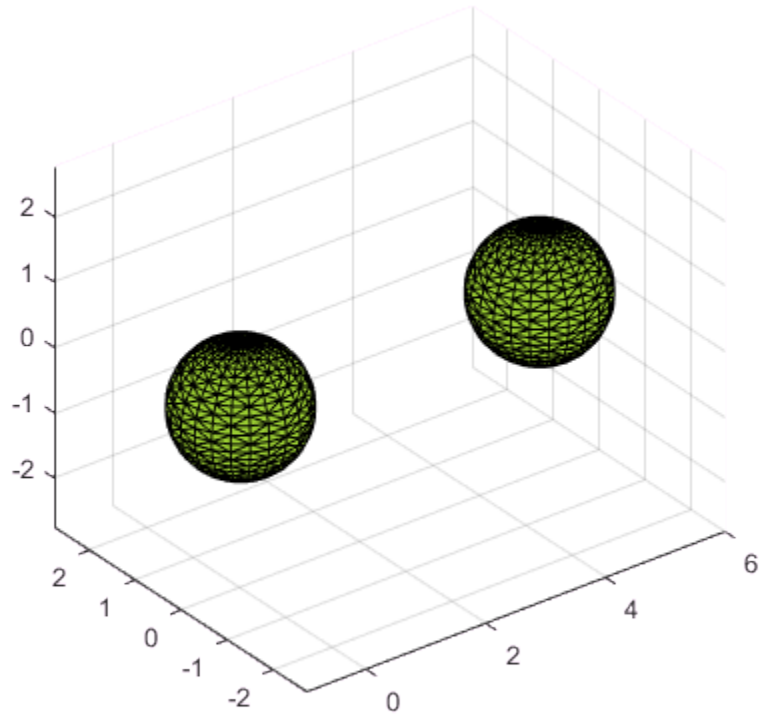

Compute the volume of the alpha shape.

```
totalvol = volume(shp)
```

```
totalvol = 8.2468
```

Compute the volumes of each of the two regions separately.

```
regionvols = volume(shp, 1:numRegions(shp))
```

```
regionvols =

    4.1234    4.1234
```

Input Arguments

shp — 3-D alpha shape

alphaShape object

3-D alpha shape, specified as an alphaShape object. For more information, see alphaShape

Example: shp = alphaShape(x,y,z) creates a 3-D alphaShape object from the (x,y,z) point coordinates.

RegionID — ID number for a region in the alpha shape

positive integer scalar

ID number for region in alpha shape, specified as a positive integer scalar between 1 and numRegions(shp).

An alpha shape can contain several smaller regions, depending on the point set and parameters. Each of these smaller regions is assigned a unique RegionID, which numbers the regions from the largest area or volume to the smallest. For example, consider a 3-D alpha shape with two regions. The region with the largest volume has a RegionID of 1, and the smaller region has a RegionID of 2.

Example: shp.RegionThreshold = area(shp,numRegions(shp)-2); suppresses the two smallest regions in 2-D alpha shape shp.

Data Types: double

See Also

See Also

alphaShape | area | surfaceArea

Topics

alphaShape

Introduced in R2014b

amd

Approximate minimum degree permutation

Syntax

```
P = amd(A)
P = amd(A,opts)
```

Description

`P = amd(A)` returns the approximate minimum degree permutation vector for the sparse matrix `C = A + A'`. The Cholesky factorization of `C(P,P)` or `A(P,P)` tends to be sparser than that of `C` or `A`. The `amd` function tends to be faster than `symamd`, and also tends to return better orderings than `symamd`. Matrix `A` must be square. If `A` is a full matrix, then `amd(A)` is equivalent to `amd(sparse(A))`.

`P = amd(A,opts)` allows additional options for the reordering. The `opts` input is a structure with the two fields shown below. You only need to set the fields of interest:

- **dense** — A nonnegative scalar value that indicates what is considered to be dense. If A is n-by-n, then rows and columns with more than `max(16,(dense*sqrt(n)))` entries in `A + A'` are considered to be "dense" and are ignored during the ordering. MATLAB software places these rows and columns last in the output permutation. The default value for this field is 10.0 if this option is not present.
- **aggressive** — A scalar value controlling aggressive absorption. If this field is set to a nonzero value, then aggressive absorption is performed. This is the default if this option is not present.

MATLAB software performs an assembly tree post-ordering, which is typically the same as an elimination tree post-ordering. It is not always identical because of the approximate degree update used, and because “dense” rows and columns do not take part in the post-order. It well-suited for a subsequent `chol` operation, however, If you require a precise elimination tree post-ordering, you can use the following code:

```
P = amd(S);
```

```
C = spones(S)+spones(S');
[ignore, Q] = etree(C(P,P));
P = P(Q);
```

If S is already symmetric, omit the second line, `C = spones(S)+spones(S')`.

Examples

Effect of Preordering on Sparsity of Cholesky Factors

Compute the Cholesky factor of a matrix before and after it is ordered using `amd` to examine the effect on sparsity.

Load the barbell graph sparse matrix and add a sparse identity matrix to it to ensure it is positive definite. Compute two Cholesky factors: one of the original matrix and one of the original matrix preordered with `amd`.

```
load(fullfile(matlabroot,'examples','matlab','barbellgraph.mat'))
A = A+speye(size(A));
p = amd(A);
L = chol(A,'lower');
Lp = chol(A(p,p),'lower');
```

Plot the sparsity patterns of all four matrices. The Cholesky factor obtained from the preordered matrix is much sparser compared to the factor of the matrix in its natural ordering.

```
figure
subplot(2,2,1)
spy(A)
title('Original Matrix A')
subplot(2,2,2)
spy(A(p,p))
title('AMD ordered A')
subplot(2,2,3)
spy(L)
title('Cholesky factor of A')
subplot(2,2,4)
spy(Lp)
title('Cholesky factor of AMD ordered A')
```

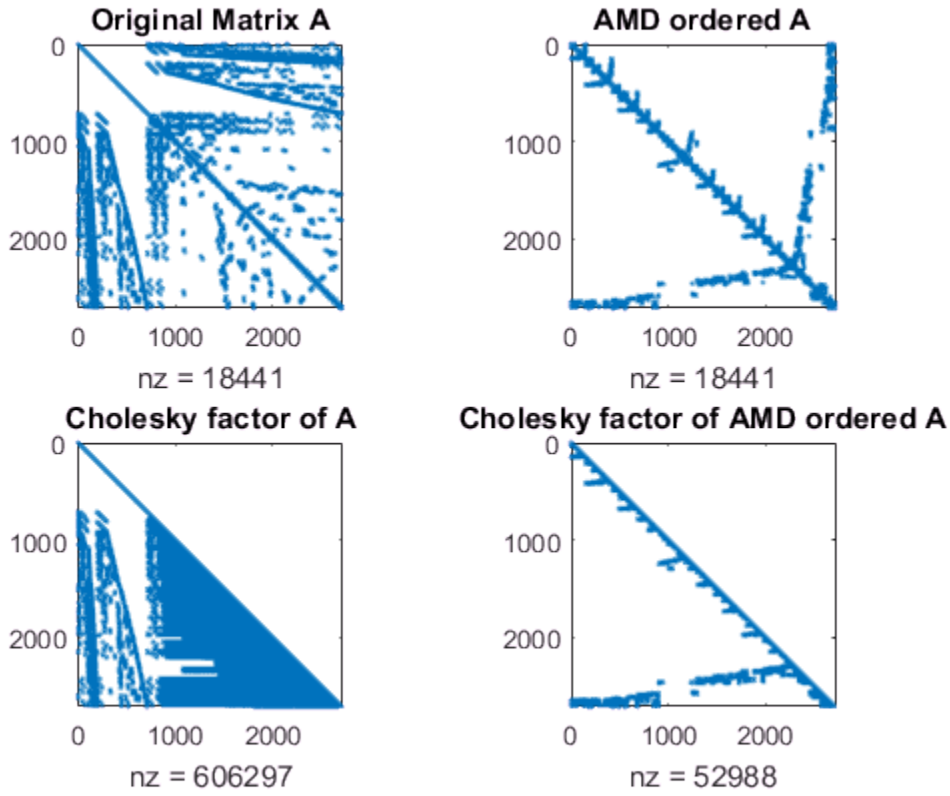

See Also

`colamd` | `colperm` | `symamd` | `symrcm`

ancestor

Ancestor of graphics object

Syntax

```
p = ancestor(h,type)
p = ancestor(h,type,'toplevel')
```

Description

`p = ancestor(h,type)` returns the handle of the closest ancestor of `h`, if the ancestor is one of the types of graphics objects specified by `type`. `type` can be:

- a character vector with the name of a single type of object, for example, `'figure'`.
- a cell array containing the names of multiple objects, for example, `{'hgtransform','hggroup','axes'}`.

If MATLAB cannot find an ancestor of `h` that is one of the specified types, then `ancestor` returns `p` as empty. When `ancestor` searches the hierarchy, it includes the object itself in the search. Therefore, if the object with handle `h` is of one of the types listed in `type`, `ancestor` will return object `h`.

`ancestor` returns `p` as empty but does not issue an error if `h` is not a graphics object.

`p = ancestor(h,type,'toplevel')` returns the highest-level ancestor of `h`, if this type appears in the `type` argument.

Examples

Return Top-Level Ancestor

Create `Line` objects and parent them to a `Group` object. Then return the top-level ancestor.

```
g = hggroup;
```

```
ln = line(randn(5),randn(5),'Parent',g);
```

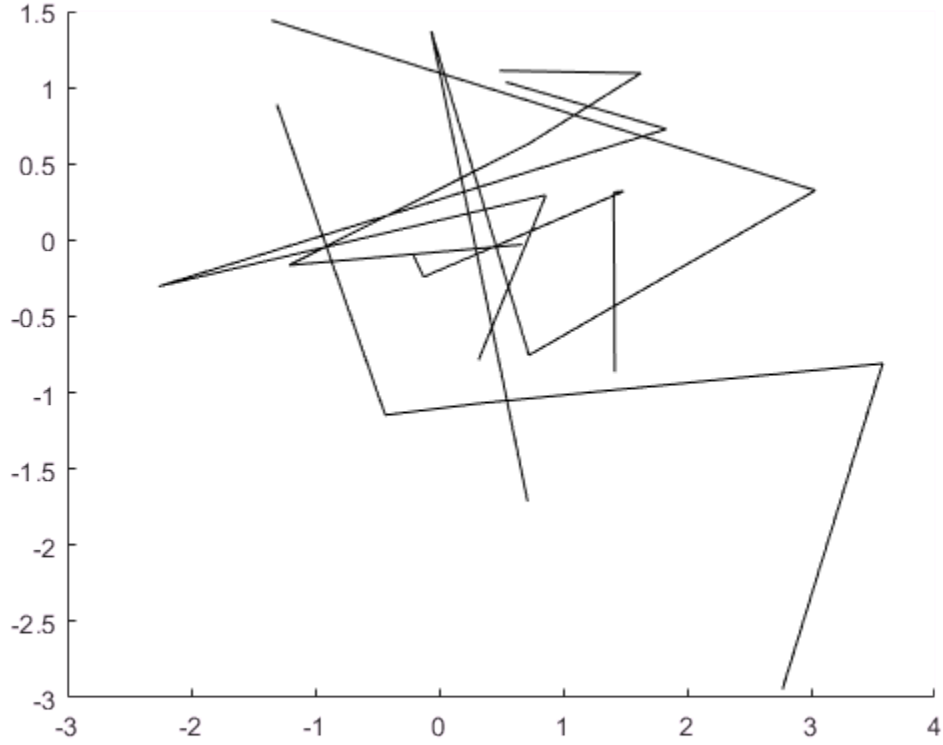


```
tp = ancestor(g,{'figure','axes','hggroup'},'toplevel')
```

```
tp =
  Figure (1) with properties:

      Number: 1
        Name: ''
       Color: [0.9400 0.9400 0.9400]
    Position: [360 502 560 420]
       Units: 'pixels'

  Show all properties
```

See Also

`findobj`

Introduced before R2006a

and, &

Find logical AND

Syntax

```
A & B
and(A,B)
```

Description

`A & B` performs a logical AND of arrays `A` and `B` and returns an array containing elements set to either logical 1 (`true`) or logical 0 (`false`). An element of the output array is set to logical 1 (`true`) if both `A` and `B` contain a nonzero element at that same array location. Otherwise, the array element is set to 0.

`and(A,B)` is an alternate way to execute `A & B`, but is rarely used. It enables operator overloading for classes.

Examples

Locate Nonzero Values

Find the logical AND of two matrices. The result contains logical `1` (`true`) only where both matrices contain nonzero values.

```
A = [5 7 0; 0 2 9; 5 0 0]
```

```
A =

     5     7     0
     0     2     9
     5     0     0
```

```
B = [6 6 0; 1 3 5; -1 0 0]
```

```
B =
```

```
     6     6     0
     1     3     5
    -1     0     0
```

```
A & B
```

```
ans = 3×3 logical array
   1   1   0
   0   1   1
   1   0   0
```

Truth Table for Logical AND

Create a truth table for `and`.

```
A = [true false]
```

```
A = 1×2 logical array
   1   0
```

```
B = [true; false]
```

```
B = 2×1 logical array
   1
   0
```

```
C = A&B
```

```
C = 2×2 logical array
   1   0
   0   0
```

Input Arguments

A — Left operand

scalar | vector | matrix | multidimensional array

Left operand, specified as a scalar, vector, matrix, or multidimensional array. Inputs `A` and `B` must either be the same size or have sizes that are compatible (for example, `A`

is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

B — Right operand
scalar | vector | matrix | multidimensional array

Right operand, specified as a scalar, vector, matrix, or multidimensional array. Inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Tips

- You can chain together several logical operations, for example, `A & B | C`.
- The symbols & and && perform different operations in MATLAB. The element-wise AND operator described here is &. The short-circuit AND operator is &&. See `Logical Operators: Short Circuit` for more information.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`all` | `any` | `bitand` | `not` | `or` | `xor`

Topics

"Find Array Elements That Meet a Condition"
"Truth Table for Logical Operations"
"MATLAB Operators and Special Characters"

Introduced before R2006a

angle

Phase angle

Syntax

```
P = angle(Z)
```

Description

`P = angle(Z)` returns the phase angles, in radians, for each element of complex array `Z`. The angles lie between $\pm\pi$.

For complex `Z`, the magnitude `R` and phase angle `theta` are given by

```
R = abs(Z)
theta = angle(Z)
```

and the statement

```
Z = R.*exp(i*theta)
```

converts back to the original complex `Z`.

Examples

Phase Angles of Matrix Elements

Create a matrix of complex values and compute the phase angle of each element.

```
Z = [1 - 1i   2 + 1i   3 - 1i   4 + 1i
     1 + 2i   2 - 2i   3 + 2i   4 - 2i
     1 - 3i   2 + 3i   3 - 3i   4 + 3i
     1 + 4i   2 - 4i   3 + 4i   4 - 4i];
```

```
P = angle(Z)
```

```
P =
```

```
   -0.7854    0.4636   -0.3218    0.2450
    1.1071   -0.7854    0.5880   -0.4636
   -1.2490    0.9828   -0.7854    0.6435
    1.3258   -1.1071    0.9273   -0.7854
```

Algorithms

The `angle` function can be expressed as `angle(z) = imag(log(z)) = atan2(imag(z),real(z))`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`abs` | `atan2` | `unwrap`

Introduced before R2006a

AnimatedLine

Line animations

Description

`AnimatedLine` objects optimize line animations by accumulating data from a streaming data source. After you create the initial animated line using the `animatedline` function, you can add new points to the line without having to redefine the existing points. Modify the appearance of the animated line by setting its properties.

Create Object

Create an animated line object using the `animatedline` function.

Properties

AnimatedLine Properties	Control line animation appearance and behavior

Object Functions

addpoints	Add points to animated line
getpoints	Return points that define animated line
clearpoints	Clear points from animated line

Examples

Display Line Animation

Create the initial animated line object. Then, use a loop to add 1,000 points to the line. After adding each new point, use `drawnow` to display the new point on the screen.

```
h = animatedline;
```

```
axis([0,4*pi,-1,1])

x = linspace(0,4*pi,1000);
y = sin(x);
for k = 1:length(x)
    addpoints(h,x(k),y(k));
    drawnow
end
```

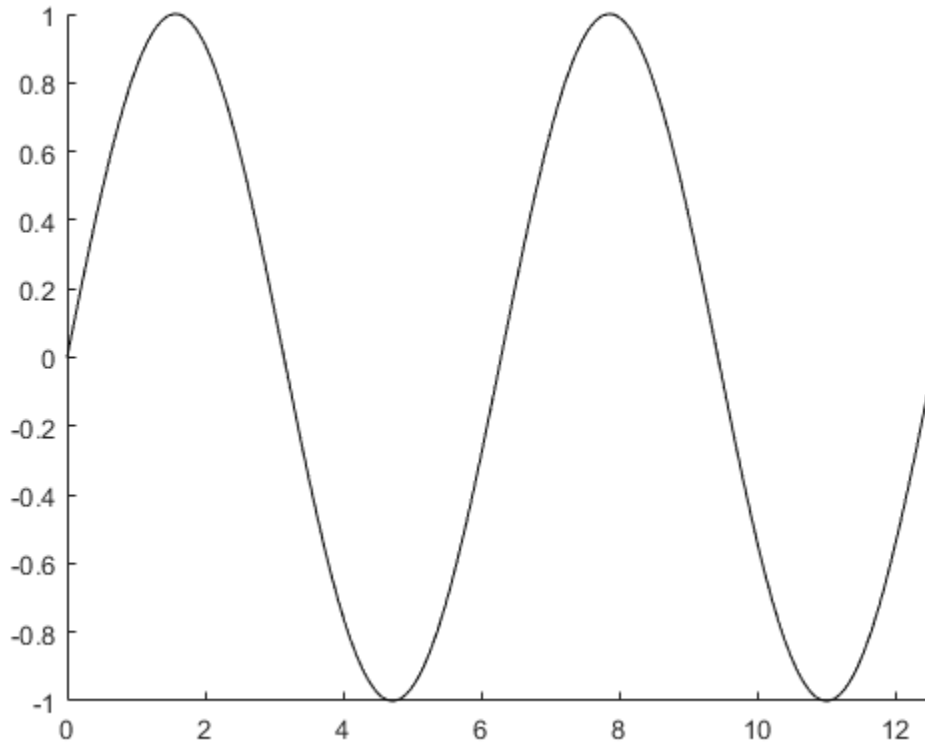

For faster rendering, add more than one point to the line each time through the loop or use `drawnow limitrate`.

Query the points of the line.

```
[xdata,ydata] = getpoints(h);
```

Clear the points from the line.

```
clearpoints(h)
drawnow
```

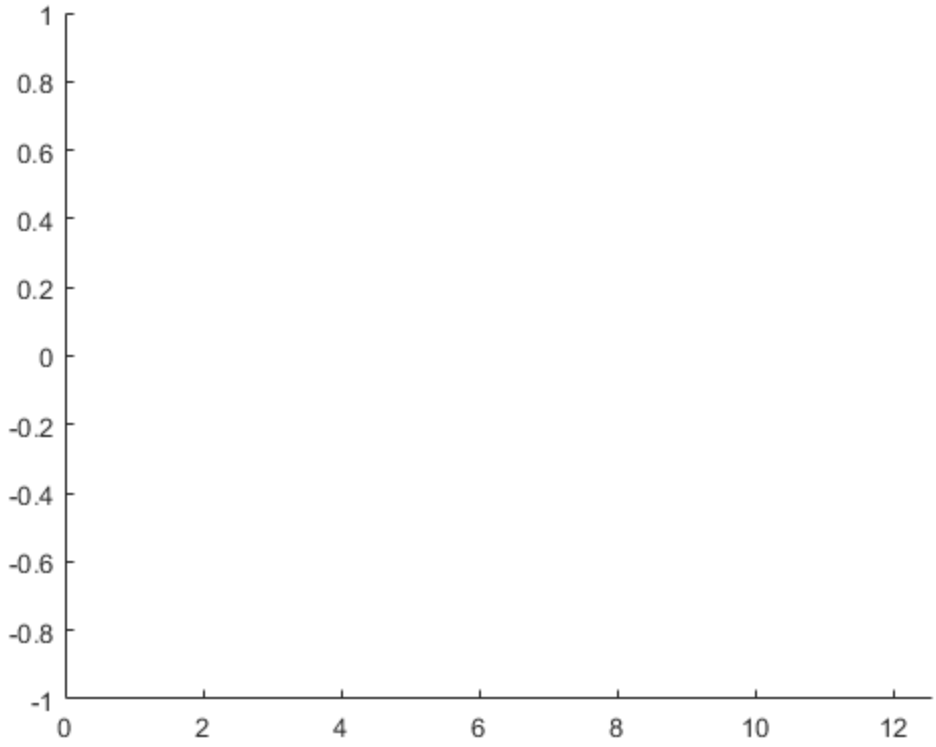

Set Maximum Number of Points

Limit the number of points in the animated line to 100. Use a loop to add one point to the line at a time. When the line contains 100 points, adding a new point to the line deletes the oldest point.

```
h = animatedline('MaximumNumPoints',100);
```

```
axis([0,4*pi,-1,1])

x = linspace(0,4*pi,1000);
y = sin(x);
for k = 1:length(x)
    addpoints(h,x(k),y(k));
    drawnow
end
```

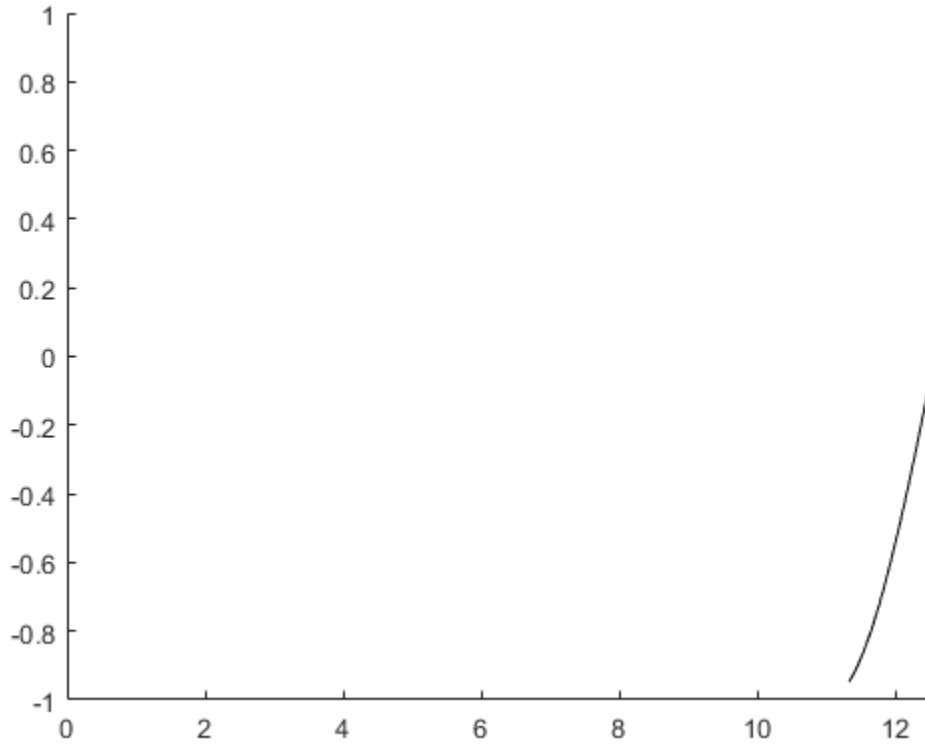

Add Points in Sets for Fast Animation

Use a loop to add 100,000 points to an animated line. Since the number of points is large, adding one point to the line each time through the loop might be slow. Instead, add 100 points to the line each time through the loop for a faster animation.

```
h = animatedline;
axis([0,4*pi,-1,1])

numpoints = 100000;
x = linspace(0,4*pi,numpoints);
y = sin(x);
for k = 1:100:numpoints-99
    xvec = x(k:k+99);
    yvec = y(k:k+99);
    addpoints(h,xvec,yvec)
    drawnow
end
```

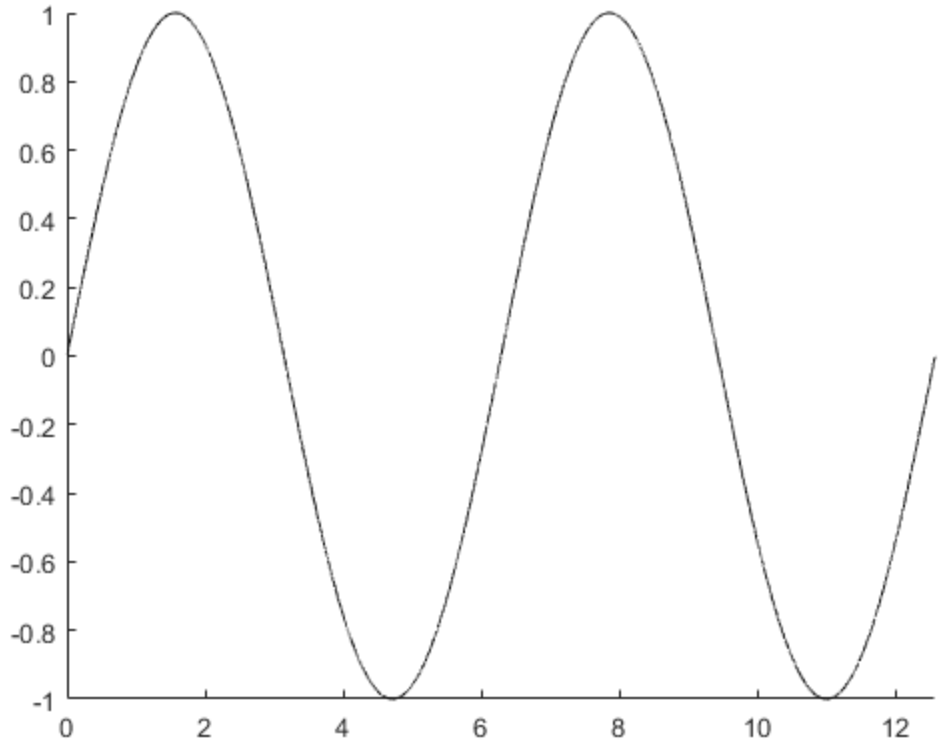

Another technique for creating faster animations is to use `drawnow limitrate` instead of `drawnow`.

Use drawnow limitrate for Fast Animation

Use a loop to add 100,000 points to an animated line. Since the number of points is large, using `drawnow` to display the changes might be slow. Instead, use `drawnow limitrate` for a faster animation.

```
h = animatedline;
axis([0,4*pi,-1,1])

numpoints = 100000;
x = linspace(0,4*pi,numpoints);
y = sin(x);
for k = 1:numpoints
    addpoints(h,x(k),y(k))
    drawnow limitrate
end
```

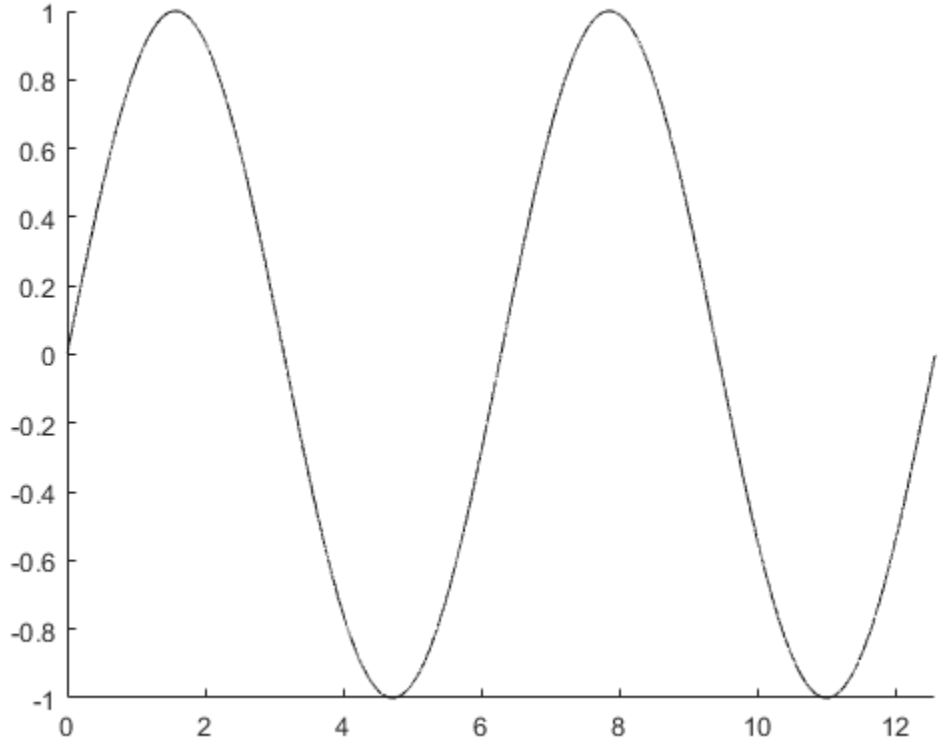

Control Animation Speed

Control the animation speed by running through several iterations of the animation loop before drawing the updates on the screen. Use this technique when `drawnow` is too slow and `drawnow limitrate` is too fast.

For example, update the screen every 1/30 seconds. Use the `tic` and `toc` commands to keep track of how much time passes between screen updates.

```
h = animatedline;
axis([0,4*pi,-1,1])
numpoints = 10000;
x = linspace(0,4*pi,numpoints);
y = sin(x);
```

```
a = tic; % start timer
for k = 1:numpoints
    addpoints(h,x(k),y(k))
    b = toc(a); % check timer
    if b > (1/30)
        drawnow % update screen every 1/30 seconds
        a = tic; % reset timer after updating
    end
end
```

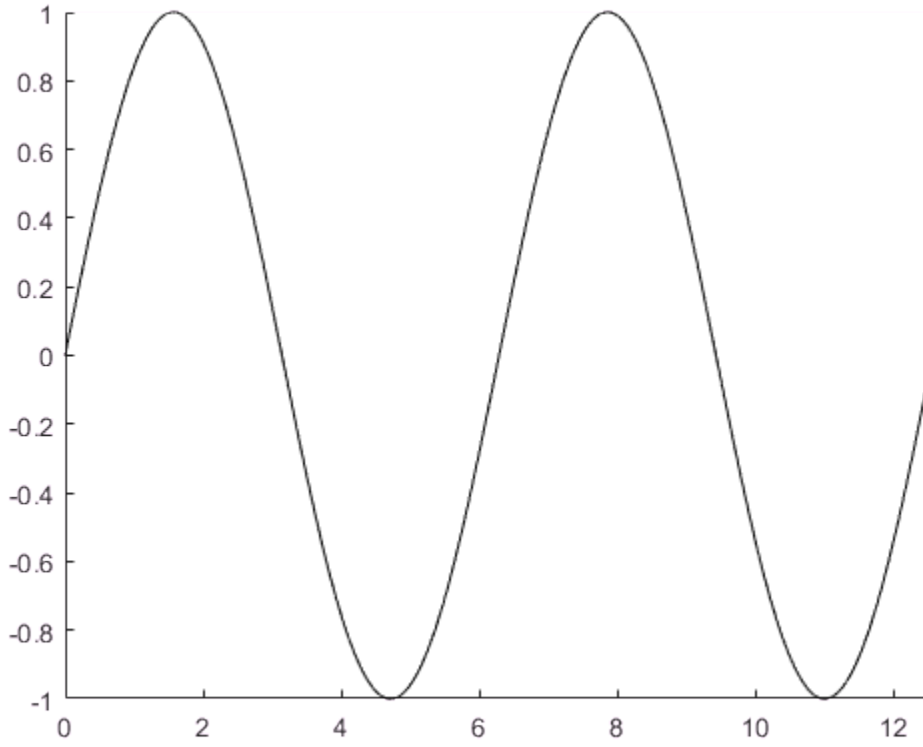


```
drawnow % draw final frame
```

A smaller interval updates the screen more often and results in a slower animation. For example, use `b > (1/1000)` to slow down the animation.

See Also

See Also

`drawnow` | `movie`

Introduced in R2014b

animatedline

Create animated line

Syntax

```
h = animatedline
h = animatedline(x,y)
h = animatedline(x,y,z)

h = animatedline( ___ ,Name,Value)
h = animatedline(ax, ___ )
```

Description

`h = animatedline` creates an animated line that has no data and adds it to the current axes. Add points to the line in a loop to create a line animation. For more information, see AnimatedLine.

`h = animatedline(x,y)` creates an animated line with initial data points defined by `x` and `y`.

`h = animatedline(x,y,z)` creates an animated line with initial data points defined by `x` , `y`, and `z`.

`h = animatedline( ___ ,Name,Value)` specifies animated line properties using one or more `Name,Value` pair arguments. For example, `'Color','r'` sets the line color to red. Use this option after any of the input argument combinations in the previous syntaxes.

`h = animatedline(ax, ___ )` creates the line in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

Examples

Display Line Animation

Create the initial animated line object. Then, use a loop to add 1,000 points to the line. After adding each new point, use `drawnow` to display the new point on the screen.

```
h = animatedline;
axis([0,4*pi,-1,1])

x = linspace(0,4*pi,1000);
y = sin(x);
for k = 1:length(x)
    addpoints(h,x(k),y(k));
    drawnow
end
```

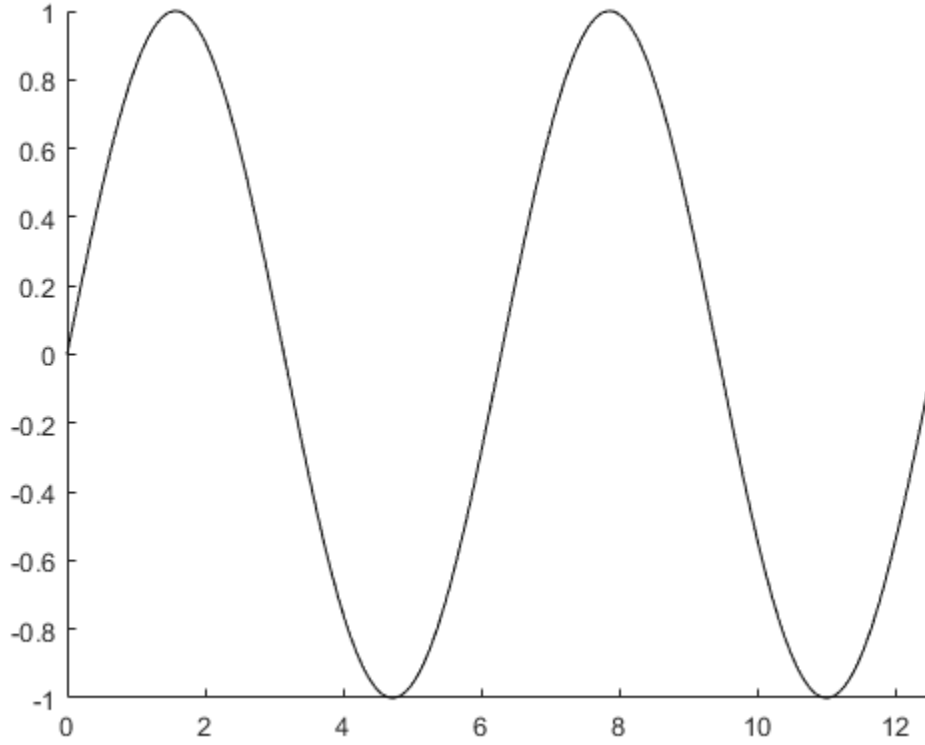

For faster rendering, add more than one point to the line each time through the loop or use `drawnow limitrate`.

Query the points of the line.

```
[xdata,ydata] = getpoints(h);
```

Clear the points from the line.

```
clearpoints(h)
drawnow
```

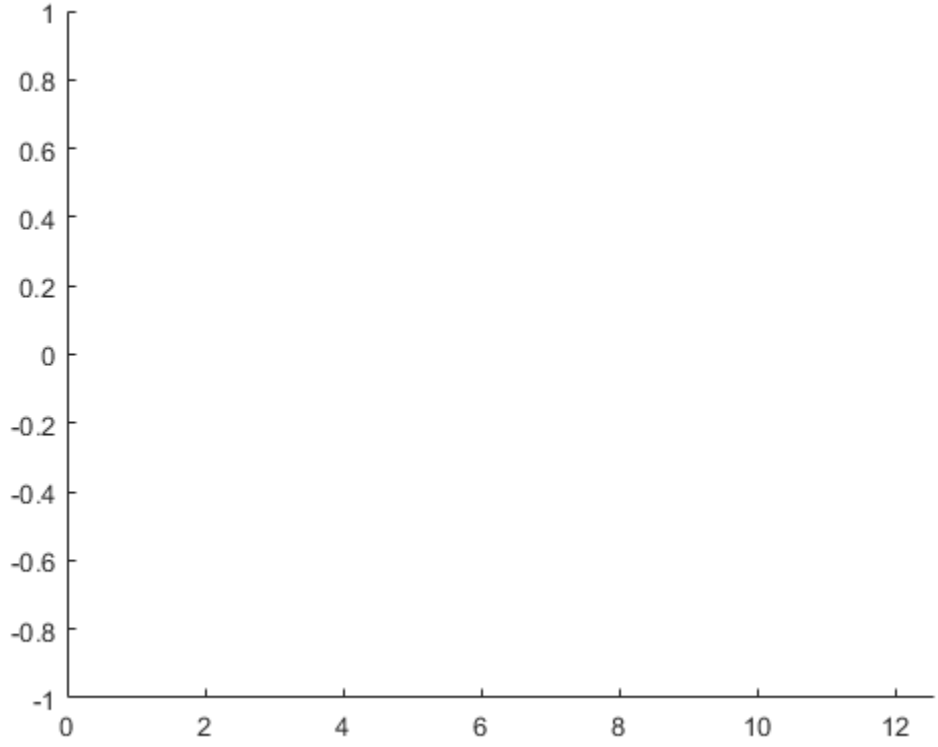

Specify Animated Line Color

Set the color of the animated line to red and set its line width to 3 points.

```
x = [1 2];
y = [1 2];
h = animatedline(x,y,'Color','r','LineWidth',3);
```

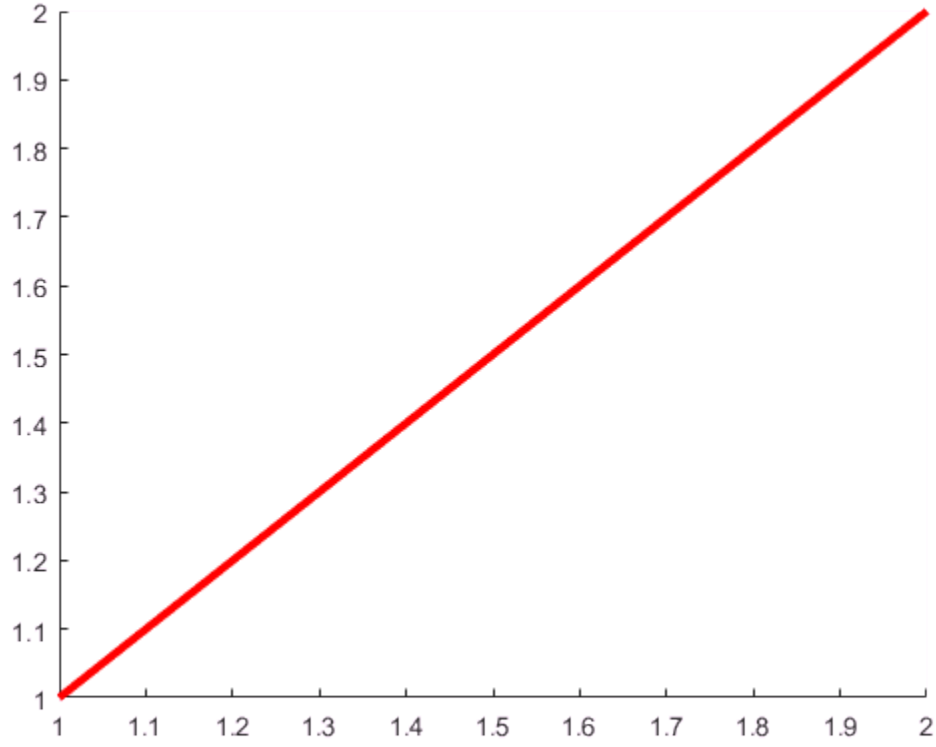

Input Arguments

x — Initial x values

[ ] (default) | scalar or vector

Initial *x* values for the animated line, specified as a scalar or vector. The input `x` must be equal in size to `y`.

Example: `1:10`

Data Types: `double`

y — Initial y values

[ ] (default) | scalar or vector

Initial *y* values for the animated line, specified as a scalar or vector. The input `y` must be equal in size to `x`.

Example: `1:10`

Data Types: `double`

z — Initial z values

[ ] (default) | scalar or vector

Initial *z* values for the animated line, specified as a scalar or vector. The input `z` must be equal in size to `x` and `y`.

Example: `1:10`

Data Types: `double`

ax — Axes object

axes object

Axes object. If you do not specify an axes object, then `animatedline` uses the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The animated line properties listed here are only a subset. For a complete list, see Animated Line Properties.

Example: `'Color','red','Marker','o'`

'Color' — Line color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'LineStyle'` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`'Marker'` — Marker symbol
`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | ...

Marker symbol, specified as one of the marker symbols listed in this table. By default, the animated line object does not have markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`'MarkerSize'` — Marker size
`6` (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`'MarkerEdgeColor'` — Color of marker edge
`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`'MarkerFaceColor'` — Color of marker interior

`'none'` (default) | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which makes the interior invisible.
- `'auto'` — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.3 0.2 0.1]

Example: 'green'

'MaximumNumPoints' — Maximum number of points stored and displayed
1000000 (default) | positive value | Inf

Maximum number of points stored and displayed as part of the line, specified as a positive value or Inf. By default, the value is one million points. If the number of points exceeds the maximum value permitted, then the animated line keeps the most recently added points and drops points from the beginning of the line. These dropped points no longer display on the screen and are not returned when using getpoints.

Use this property to limit the number of points appearing on the screen at any given time or to limit the amount of memory used. If you specify the value as Inf, then the animated line does not drop any points, but the number of points stored is limited by the amount of memory available.

Example: 10

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

Output Arguments

h — AnimatedLine object
AnimatedLine object

`AnimatedLine` object. Use `h` to modify the `AnimatedLine` object after its been created, such as changing property values or adding points to the line. For more information, see AnimatedLine.

Tips

- Animated lines do not support data tips.

See Also

See Also

Functions
`addpoints` | `clearpoints` | `getpoints`

Using Objects
AnimatedLine

Properties
AnimatedLine Properties

Introduced in R2014b

AnimatedLine Properties

Control line animation appearance and behavior

Description

`AnimatedLine` properties control the appearance and behavior of an `AnimatedLine` object. By changing property values, you can modify certain aspects of the line. Use dot notation to refer to a particular object and property:

```
an = animatedline;
c = an.Color;
an.Color = 'red';
```

Line

`Color` — Line color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`MaximumNumPoints` — Maximum number of points stored and displayed

`1000000` (default) | positive value | `Inf`

Maximum number of points stored and displayed as part of the line, specified as a positive value or `Inf`. By default, the value is one million points. If the number of points exceeds the maximum value permitted, then the animated line keeps the most recently added points and drops points from the beginning of the line. These dropped points no longer display on the screen and are not returned when using `getpoints`.

Use this property to limit the number of points appearing on the screen at any given time or to limit the amount of memory used. If you specify the value as `Inf`, then the animated line does not drop any points, but the number of points stored is limited by the amount of memory available.

Example: 10

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

AlignVertexCenters — Sharp vertical and horizontal lines

'off' (default) | 'on'

Sharp vertical and horizontal lines, specified as 'off' or 'on'.

If the associated figure has a GraphicsSmoothing property set to 'on' and a Renderer property set to 'opengl', then the figure applies a smoothing technique to plots. In some cases, this smoothing technique can cause vertical and horizontal lines to appear uneven in thickness or color. Use the AlignVertexCenters property to eliminate the uneven appearance.

- 'off' — Do not sharpen vertical or horizontal lines. The lines might appear uneven in thickness or color.
- 'on' — Sharpen vertical and horizontal lines to eliminate an uneven appearance.

Note: You must have a graphics card that supports this feature. To see if the feature is supported, type opengl info. If it is supported, then the returned fields contain the line SupportsAlignVertexCenters: 1.

Markers

Marker — Marker symbol

'none' (default) | 'o' | '+' | '*' | '.' | '*' | ...

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
'o'	Circle
'+'	Plus sign
'*'	Asterisk
'.'	Point

Value	Description
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerSize` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`

Long Name	Short Name	RGB Triplet
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

MarkerFaceColor — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

Identifiers

`Type` — Type of graphics object

`'animatedline'`

This property is read-only.

Type of graphics object, returned as `'animatedline'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `AnimatedLine` object that has a defined

color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `AnimatedLine` object responds to the click or if an ancestor does.

- `'none'` — Cannot capture mouse clicks. Clicking the `AnimatedLine` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `AnimatedLine` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `AnimatedLine` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `AnimatedLine` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `AnimatedLine` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `AnimatedLine` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `AnimatedLine` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.

- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments

- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

Functions
`animatedline`

Using Objects

AnimatedLine

Topics

"Access Property Values"
"Graphics Object Properties"

annotation

Create annotations

Syntax

```
annotation(lineType,x,y)
annotation(lineType)

annotation(shapeType,dim)
annotation(shapeType)

annotation( ___ ,Name,Value)
annotation(container, ___ )

an = annotation( ___ )
```

Description

`annotation(lineType,x,y)` creates a line or arrow annotation extending between two points in the current figure. Specify `lineType` as `'line'`, `'arrow'`, `'doublearrow'`, or `'textarrow'`. Specify `x` and `y` as two-element vectors of the form `[x_begin x_end]` and `[y_begin y_end]`, respectively.

`annotation(lineType)` creates the annotation in the default position between the points `(0.3,0.3)` and `(0.4,0.4)`.

`annotation(shapeType,dim)` creates a rectangle, ellipse, or text box annotation with a particular size and location in the current figure. Specify `shapeType` as `'rectangle'`, `'ellipse'`, or `'textbox'`. Specify `dim` as a four-element vector of the form `[x y w h]`. The `x` and `y` elements determine the position and the `w` and `h` elements determine the size.

`annotation(shapeType)` creates the annotation in the default position so that the lower left corner is at `(0.3,0.3)` and the width and height are both `0.1`.

`annotation( ___ ,Name,Value)` creates the annotation and specifies properties as name-value pair arguments. Different types of annotations support different properties.

You can specify properties with any of the input argument combinations in the previous syntaxes.

`annotation(container, ___ )` creates the annotation in the figure, uipanel, or uitab specified by `container`, instead of in the current figure.

`an = annotation( ___ )` returns the annotation object. The type of object returned depends on first input argument. Use `an` to modify properties of the object after it is created. You can specify an output argument with any of the previous syntaxes.

Examples

Create Text Arrow Annotation

Create a simple line plot and add a text arrow to the figure. Specify the text arrow location in normalized figure coordinates, starting at the point `(0.3,0.6)` and ending at `(0.5,0.5)`. Specify the text description by setting the `String` property.

```
figure
plot(1:10)
x = [0.3 0.5];
y = [0.6 0.5];
annotation('textarrow',x,y,'String','y = x ')
```

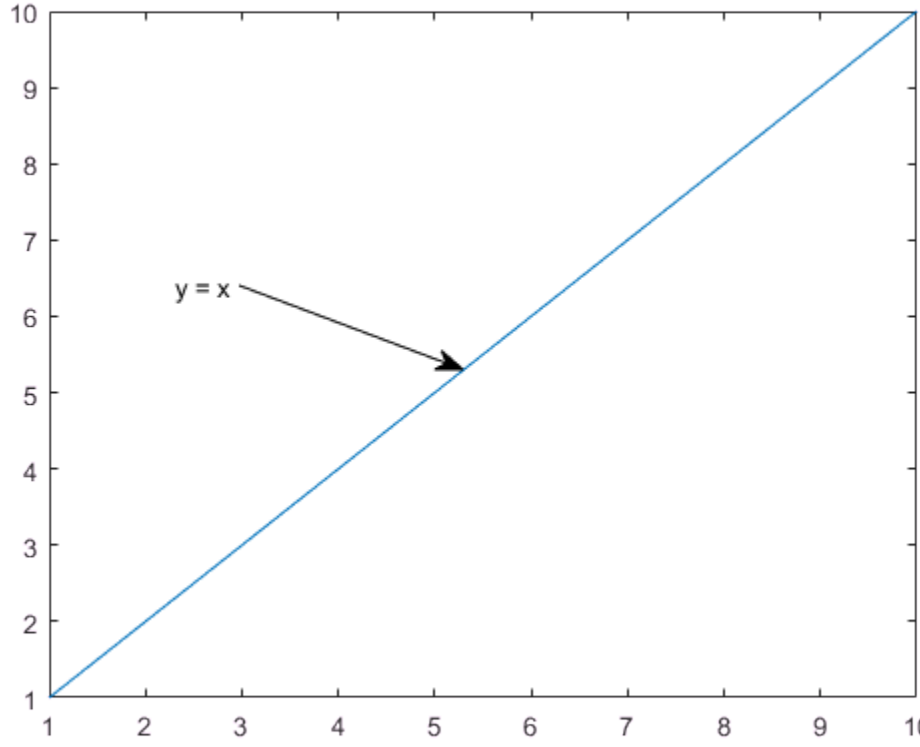

Create Text Box Annotation

Create a simple line plot and add a text box annotation to the figure. Specify the text description by setting the `String` property. Force the box to fit tightly around the text by setting the `FitBoxToText` property to `'on'`.

```
figure
plot(1:10)
dim = [.2 .5 .3 .3];
str = 'Straight Line Plot from 1 to 10';
annotation('textbox',dim,'String',str,'FitBoxToText','on');
```

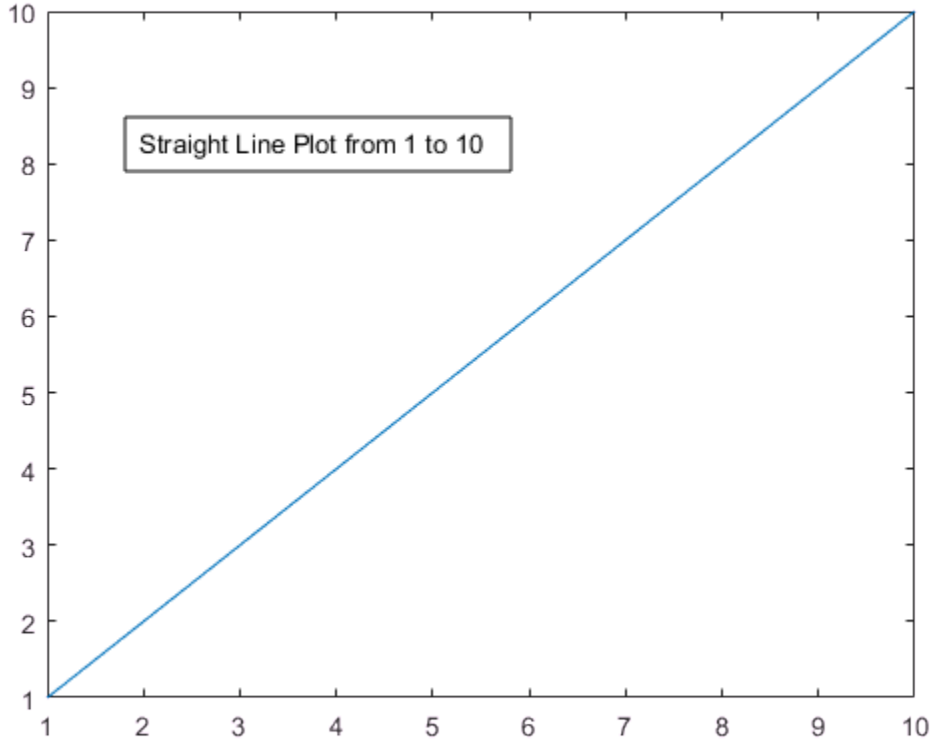

Create a text box annotation without setting the `FitBoxToText` property. The text box uses the specified width and height and wraps text as needed.

```
figure
plot(1:10)
dim = [.2 .5 .3 .3];
str = 'Straight Line Plot from 1 to 10';
annotation('textbox',dim,'String',str)
```

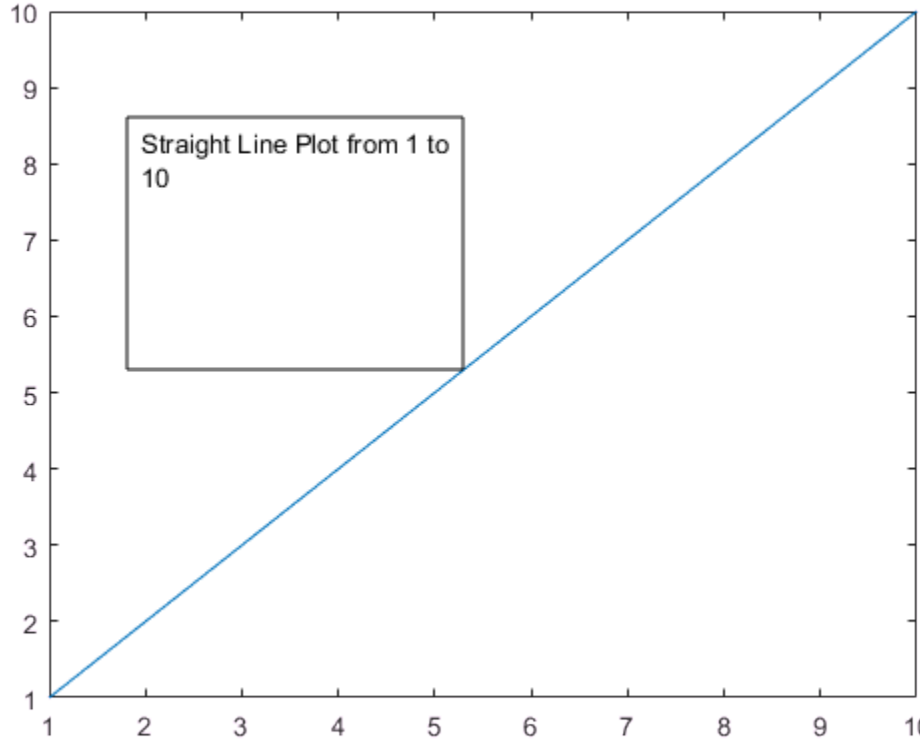

Create Text Box Annotation with Multiline Text

Create a text box annotation with multiline text by setting the `String` property to a cell array. Each element of the cell array displays on a separate line. Force the box to fit tightly around the text by setting the `FitBoxToText` property to `'on'`.

```
figure
plot(1:10)
dim = [0.2 0.5 0.3 0.3];
str = {'Straight Line Plot','from 1 to 10'};
annotation('textbox',dim,'String',str,'FitBoxToText','on');
```

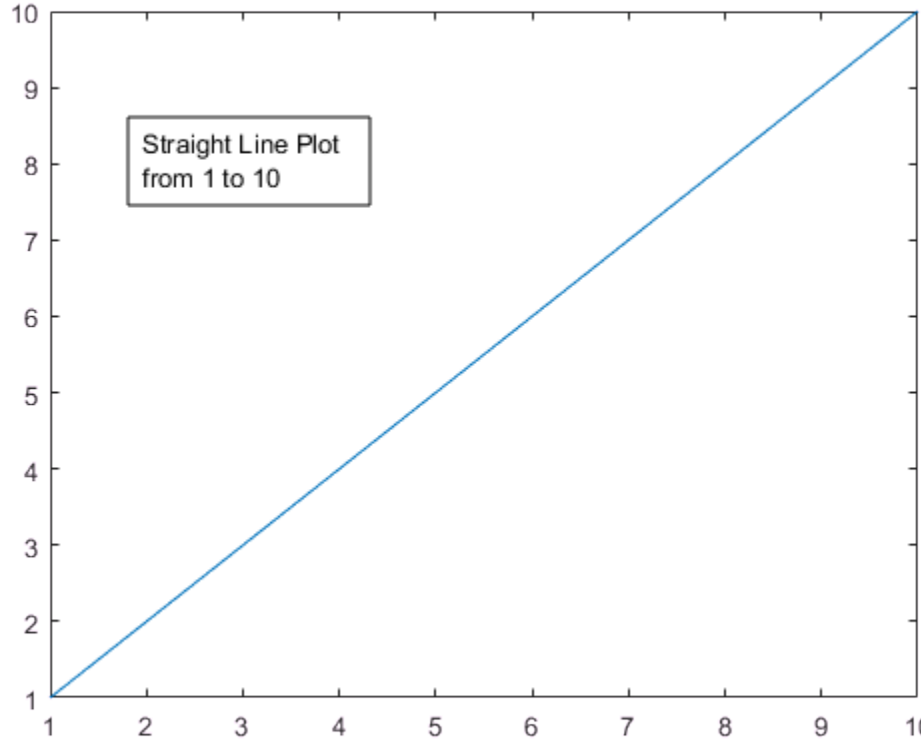

Create Rectangle Annotation

Create a stem plot and add a rectangle annotation to the figure. Change the color of the rectangle outline by specifying the `Color` property.

```
figure
data = [2 4 6 7 8 7 5 2];
stem(data)
dim = [.3 .68 .2 .2];
annotation('rectangle',dim,'Color','red')
```

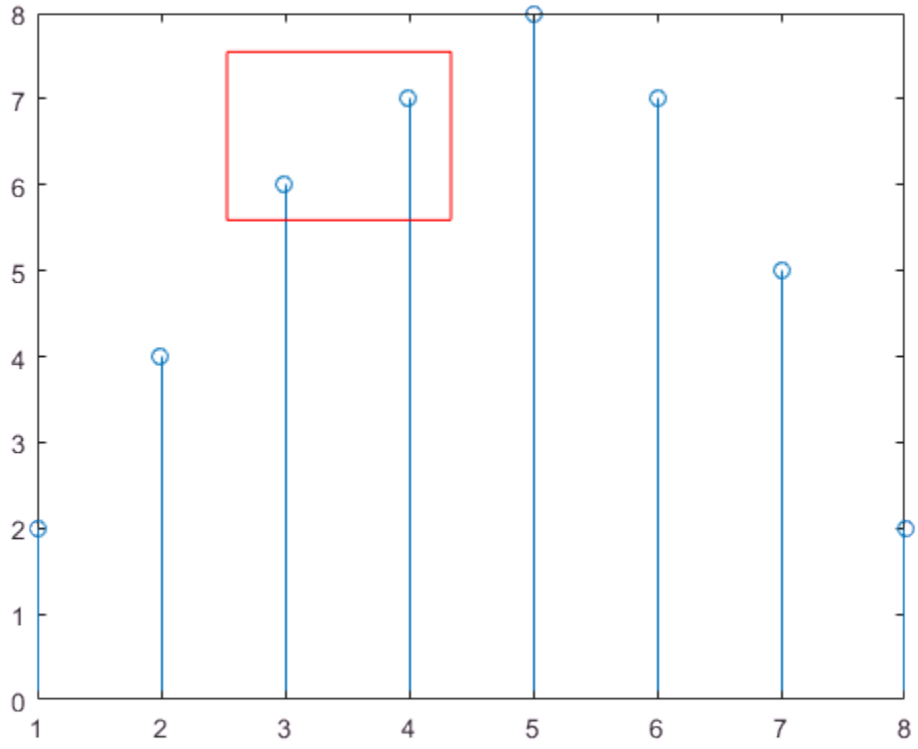

Add a second rectangle annotation to the figure. Specify the fill color by setting the `FaceColor` property. Add transparency by setting the `FaceAlpha` property to a value between 0 (completely transparent) and 1 (completely opaque).

```
dim2 = [.74 .56 .1 .1];
annotation('rectangle',dim2,'FaceColor','blue','FaceAlpha',.2)
```

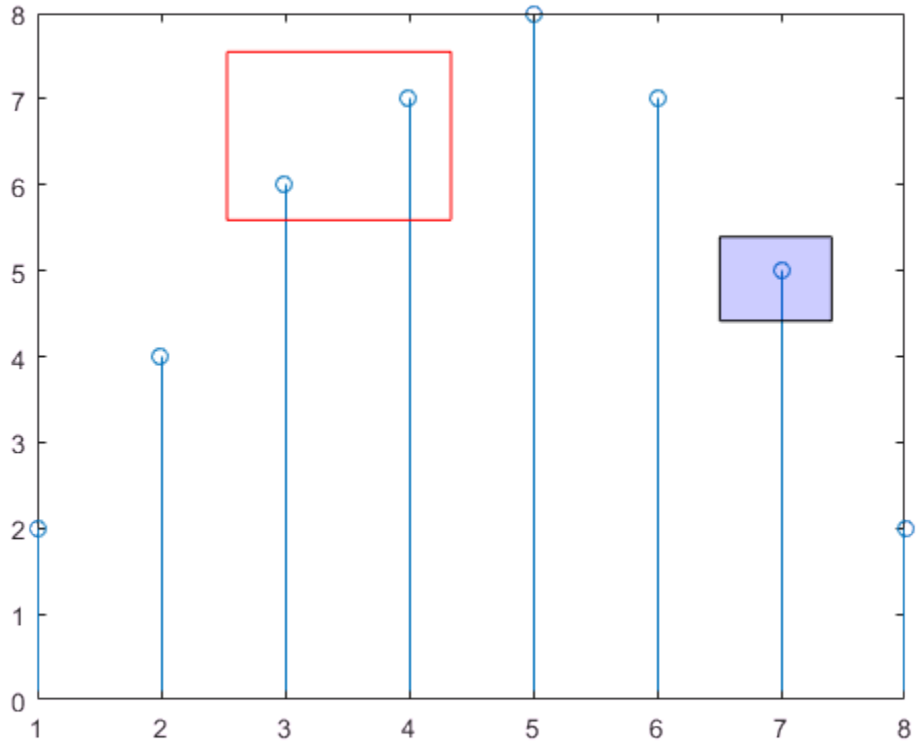

Create Ellipse Annotation

Create a simple line plot and add an ellipse annotation to the figure. Specify `dim` as the size and location of the smallest rectangle that encloses the ellipse.

```
figure
x = linspace(-4,4);
y = x.^3 - 12*x;
plot(x,y)

dim = [.2 .74 .25 .15];
annotation('ellipse',dim)
```

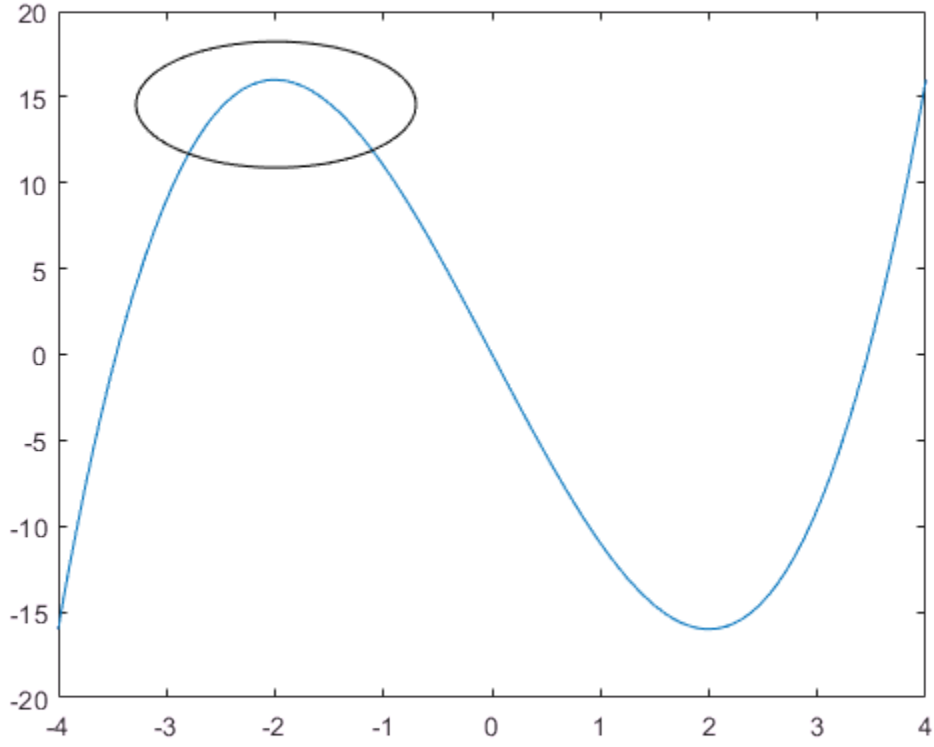

Draw a red rectangle using the same dimensions to show how the ellipse fills the rectanglular area.

```
annotation('rectangle',dim,'Color','red')
```

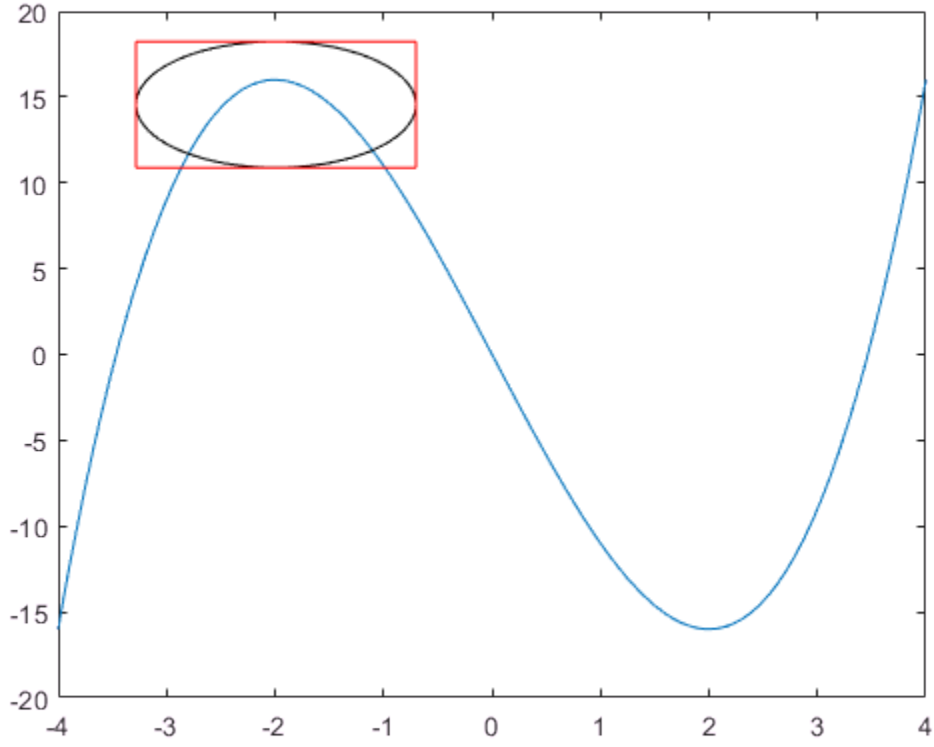

Combine Two Types of Annotations

Create a simple line plot. Then, add a bent arrow to the graph by combining a line and an arrow annotation.

```
figure
plot(1:10)

xl = [.3 .3];
yl = [.3 .4];
annotation('line',xl,yl)

xa = [.3 .4];
```

```
ya = [.4 .4];
annotation('arrow',xa,ya)
```

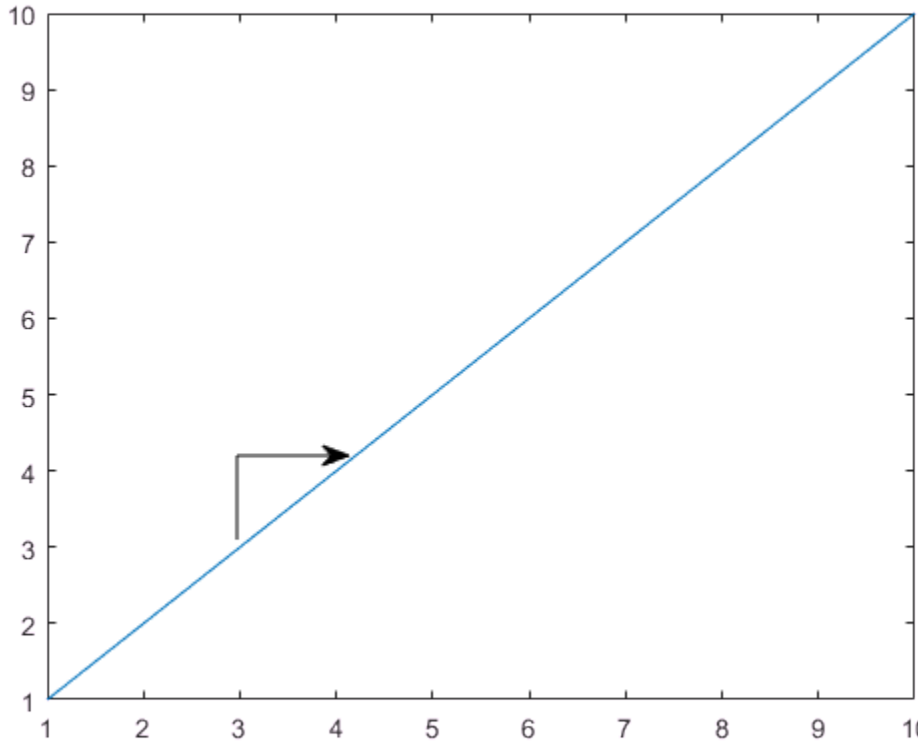

Modify Annotation After Creation

Add a text arrow to a figure and return the annotation text arrow object, a.

```
figure
plot(1:10)
x = [0.3,0.5];
y = [0.6,0.5];
a = annotation('textarrow',x,y,'String','y = x ');
```

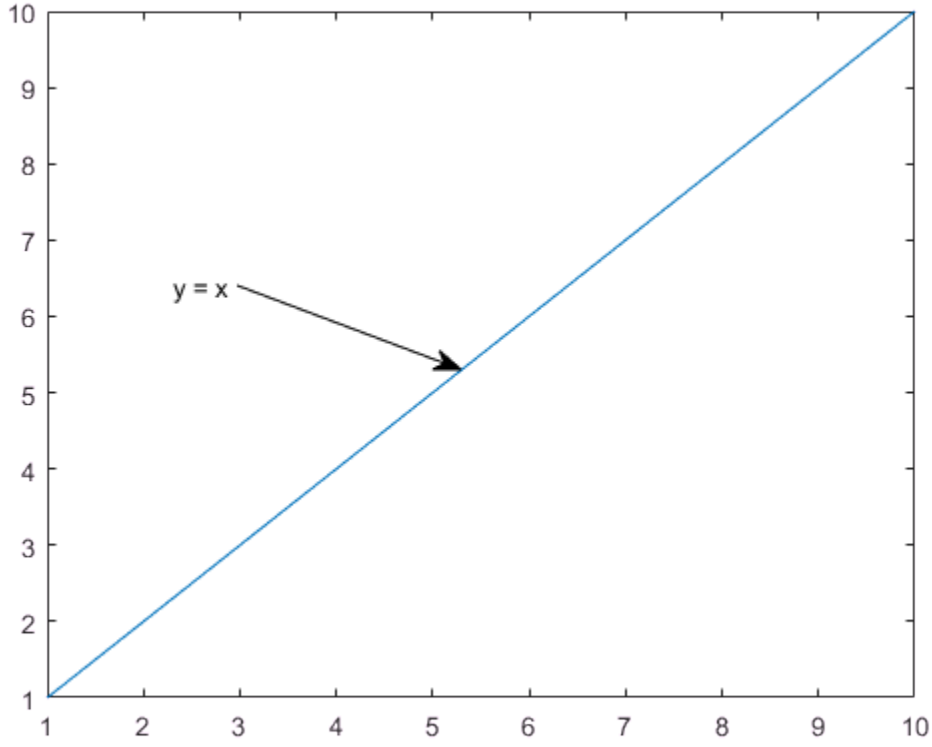

Modify properties of the annotation text arrow using `a`. For example, change the color to red and the font size to 14 points.

```
a.Color = 'red';
a.FontSize = 14;
```

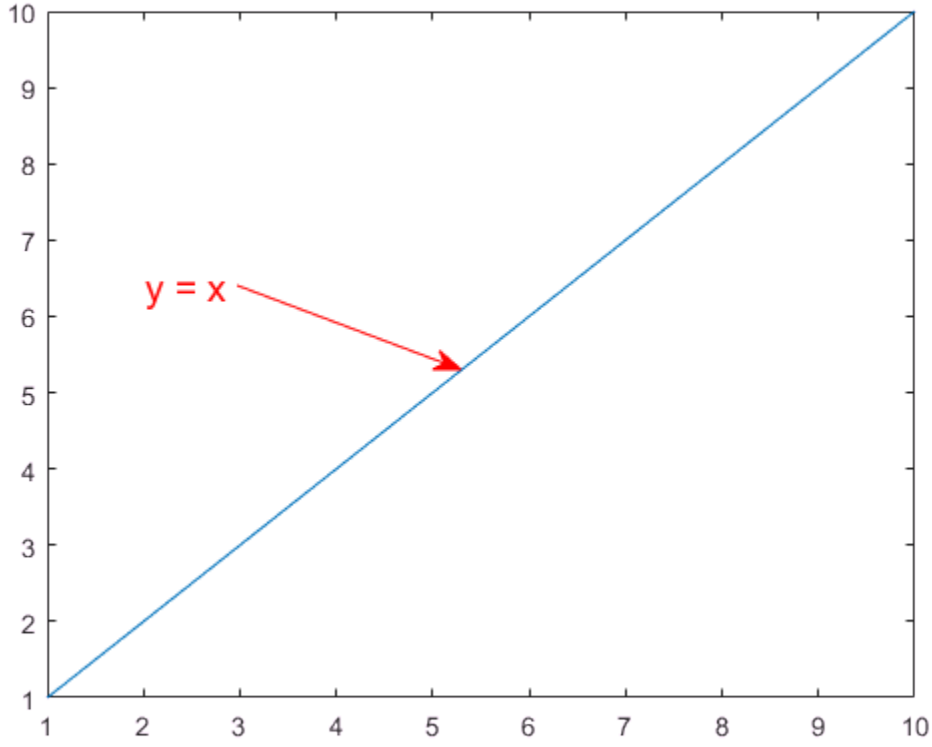

See the annotation property pages for a list of properties for each type of annotation.

- "Add Annotations to Graph Interactively"

Input Arguments

`lineType` — Type of line annotation

`'line' | 'arrow' | 'doublearrow' | 'textarrow'`

Type of line annotation, specified as one of these values.

Value	Type of Object	Example
`'line'`	Annotation line	`annotation('line', [.1 .2],[.1 .2])`
`'arrow'`	Annotation arrow	`annotation('arrow', [.1 .2],[.1 .2])`
`'doublearrow'`	Annotation double arrow	`annotation('doublearrow', [.1 .2],[.1 .2])`
`'textarrow'`	Annotation text arrow. To add text to the tail end of the text arrow, use the String property.	`annotation('textarrow', [.1 .2], [.1 .2],'String','my text')`

shapeType — Type of shape annotation

`'rectangle'` | `'ellipse'` | `'textbox'`

Type of shape annotation, specified as one of these values.

Value	Type of Object	Example
`'rectangle'`	Annotation rectangle	`annotation('rectangle', [.2 .3 .4 .5])`
`'ellipse'`	Annotation ellipse	`annotation('ellipse', [.2 .3 .4 .5])`
`'textbox'`	Annotation text box. To specify the text, set the String property. To automatically adjust the dimensions of the box to fit closely around the text, set the FitBoxToText property to `'on'`.	`annotation('textbox', [.2 .3 .4 .5],'String','my text','FitBoxToText','on')`

x — Beginning and ending *x*-coordinates

two-element vector of the form `[x_begin x_end]`

Beginning and ending *x*-coordinates, specified as a two-element vector of the form `[x_begin x_end]`. Together the `x` and `y` input arguments determine the endpoints of the line, arrow, double arrow, or text arrow annotation. The annotation extends from the point (`x_begin`, `y_begin`) to (`x_end`, `y_end`).

By default, the units are normalized to the figure. The lower left corner of the figure maps to `(0,0)` and the upper right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `x = [.3 .5]`

`y` — Beginning and ending *y*-coordinates

two-element vector of the form `[x_begin x_end]`

Beginning and ending *y*-coordinates, specified as a two-element vector of the form `[y_begin y_end]`. Together the `x` and `y` input arguments determine the endpoints of the line, arrow, double arrow, or text arrow annotation. The annotation extends from the point (`x_begin`, `y_begin`) to (`x_end`, `y_end`).

By default, the units are normalized to the figure. The lower left corner of the figure maps to `(0,0)` and the upper right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `y = [.3 .5]`

`dim` — Size and location

four-element vector of the form `[x y w h]`

Size and location, specified as a four-element vector of the form `[x y w h]`. The first two elements specify the coordinates of the lower left corner of the text box, rectangle, or ellipse with respect to the lower left corner of the figure. The second two elements specify the width and height of the annotation, respectively.

If you are creating an ellipse, then `dim` is the size and location of the smallest rectangle that encloses the ellipse.

By default, the units are normalized to the figure. The lower left corner of the figure maps to `(0,0)` and the upper right corner maps to `(1,1)`. To change the units, use the `Units` property

Example: `dim = [.3 .4 .5 .6]`

`container` — Target for annotation

figure object | uipanel object | uitab object

Target for annotation, specified as a figure, uipanel, or uitab object. For example, to add an annotation to a specific figure, specify the figure object as the first input argument to the function.

```
f = figure;
annotation(f,'line',[.1 .2],[.2 .3])
```

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `annotation('rectangle',[.5 .5 .1 .1],'EdgeColor','r')` creates a rectangle annotation with a red outline.

Each type of annotation object supports a different set of properties. For a full list of properties and descriptions for each type, see the associated property page.

- Annotation Line Properties
- Arrow Properties
- DoubleEndArrow Properties
- TextArrow Properties
- TextBox Properties
- Annotation Rectangle Properties
- Ellipse Properties

Output Arguments

an — Annotation object

scalar

Annotation object, returned as a scalar. The type of annotation object returned depends on the first input argument.

First Input Argument	Type of Object Returned	Property Page
`'line'`	Line	Annotation Line Properties
`'arrow'`	Arrow	Arrow Properties
`'doublearrow'`	Double arrow	DoubleEndArrow Properties

First Input Argument	Type of Object Returned	Property Page
`'textarrow'`	Text arrow	TextArrow Properties
`'textbox'`	Text box	TextBox Properties
`'rectangle'`	Rectangle	Annotation Rectangle Properties
`'ellipse'`	Ellipse	Ellipse Properties

Definitions

Compatibility Considerations

Starting in R2014b, annotations cannot cross uipanel boundaries. Instead, they clip at the boundaries. Previous versions of MATLAB allow annotations to extend into (or out of) the boundaries. To display an annotation within a specific figure, uipanel, or uitab, use the `container` input argument.

See Also

See Also

`rectangle` | `text`

Topics

"Add Annotations to Graph Interactively"

Introduced before R2006a

Arrow Properties

Control arrow appearance and behavior

Description

`Arrow` properties control the appearance and behavior of an `Arrow` object. By changing property values, you can modify certain aspects of the arrow.

Starting in R2014b, you can use dot notation to query and set properties.

```
ar = annotation('arrow');
c = ar.Color;
ar.Color = 'red';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Color` — Arrow color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Arrow color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you set the color to `'none'`, then the arrow is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`

Long Name	Short Name	RGB Triplet
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`LineStyle` — Style of arrow stem

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Style of arrow stem, specified as one of the line styles listed in this table.

Line Style	Description	Result
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No stem	No stem

`LineWidth` — Width of arrow stem

`0.5` (default) | positive value

Width of arrow stem, specified as a positive value in point units. One point equals 1/72 inch.

Example: `0.75`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`HeadStyle` — Style of arrowhead

`'vback2'` (default) | `'plain'` | `'ellipse'` | `'vback1'` | `'vback3'` | `'cback1'` | `'cback2'` | ...

Style of the arrowhead, specified as one of the styles in this table.

Style	Result	Style	Result
`'plain'`		`'fourstar'`	
`'ellipse'`		`'rectangle'`	
`'vback1'`		`'diamond'`	
`'vback2'` (default)		`'rose'`	
`'vback3'`		`'hypocycloid'`	
`'cback1'`		`'astroid'`	
`'cback2'`		`'deltoid'`	
`'cback3'`		`'none'`	No arrowhead

`HeadLength` — Length of arrowhead

10 (default) | scalar numeric value

Length of the arrowhead, specified as a scalar numeric value in point units. One point equals 1/72 inch. The arrowhead extends backwards from the point `(x_end,y_end)` determined by the `X` and `Y` properties.

Example: `15`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`HeadWidth` — Width of arrowhead

10 (default) | scalar numeric value

Width of the arrowhead, specified as a scalar numeric value in point units. One point equals 1/72 inch.

Example: `15`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Location and Size

X — Beginning and ending x-coordinates

`[0.3 0.4]` (default) | two-element vector

Beginning and ending *x*-coordinates, specified as a two-element vector of the form `[x_begin x_end]`.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)`, and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.2 0.5]`

Y — Beginning and ending y-coordinates

`[0.3 0.4]` (default) | two-element vector

Beginning and ending *y*-coordinates, specified as a two-element vector of the form `[y_begin y_end]`.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)`, and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.2 0.5]`

Position — Size and location

`[0.3 0.3 0.1 0.1]` (default) | four-element vector

Size and location, specified as a four-element vector of the form `[x_begin y_begin dx dy]`. The first two elements specify the coordinates for the beginning of the arrow. The second two elements specify the slope of the arrow.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)`, and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.5 0.5 0.2 0.3]`

Units — Position units

`'normalized'` (default) | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

Units	Description
`'normalized'` (default)	Normalized with respect to the figure, uipanel, or uitab that contains the annotation. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units are measured from the lower-left corner of the figure window.

This property affects the `Position` property. If you change the units, then it is good practice to return it to the default value after completing your computation to prevent affecting other functions that assume `Units` is set to the default value.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the object, then the order of specification matters. If you want to define the position with particular units, then you must set the `Units` property before the `Position` property.

See Also

See Also

`annotation`

Topics

"Access Property Values"
"Graphics Object Properties"

DoubleEndArrow Properties

Control double end arrow appearance and behavior

Description

`DoubleEndArrow` properties control the appearance and behavior of a `DoubleEndArrow` object. By changing property values, you can modify certain aspects of the double arrow.

Starting in R2014b, you can use dot notation to query and set properties.

```
an = annotation('doublearrow');
c = an.Color;
an.Color = 'red';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Color` — Arrow color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Arrow color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you set the color to `'none'`, then the arrow is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`

Long Name	Short Name	RGB Triplet
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`LineStyle` — Style of arrow stem

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Style of arrow stem, specified as one of the line styles listed in this table.

Line Style	Description	Result
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No stem	No stem

`LineWidth` — Width of arrow stem

`0.5` (default) | positive value

Width of arrow stem, specified as a positive value in point units. One point equals 1/72 inch.

Example: `0.75`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Head1Style` — Style of first arrowhead

`'vback2'` (default) | `'plain'` | `'ellipse'` | `'vback1'` | `'vback3'` | `'cback1'` | ...

Style of the first arrowhead, specified as one of the head style options in this table. The first arrowhead is located at the point `(x_begin,y_begin)` determined by the `X` and `Y` properties.

Style	Result	Style	Result
`'plain'`		`'fourstar'`	
`'ellipse'`		`'rectangle'`	
`'vback1'`		`'diamond'`	
`'vback2'` (default)		`'rose'`	
`'vback3'`		`'hypocycloid'`	
`'cback1'`		`'astroid'`	
`'cback2'`		`'deltoid'`	
`'cback3'`		`'none'`	No arrowhead

`Head2Style` — Style of second arrowhead

`'vback2'` (default) | `'plain'` | `'ellipse'` | `'vback1'` | `'vback3'` | `'cback1'` | ...

Style of the second arrowhead, specified as one of the head style options in this table. The second arrowhead is located at the point `(x_end,y_end)` determined by the `X` and `Y` properties.

Style	Result	Style	Result
`'plain'`		`'fourstar'`	
`'ellipse'`		`'rectangle'`	
`'vback1'`		`'diamond'`	

Style	Result	Style	Result
`'vback2'` (default)		`'rose'`	
`'vback3'`		`'hypocycloid'`	
`'cback1'`		`'astroid'`	
`'cback2'`		`'deltoid'`	
`'cback3'`		`'none'`	No arrowhead

`Head1Length` — Length of first arrowhead

`10` (default) | scalar numeric value

Length of the first arrowhead, specified as a scalar numeric value in point units. One point equals 1/72 inch. The first arrowhead extends backwards from the point `(x_begin,y_begin)` determined by the `X` and `Y` properties.

Example: `15`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Head2Length` — Length of second arrowhead

`10` (default) | scalar numeric value

Length of the second arrowhead, specified as a scalar numeric value in point units. One point equals 1/72 inch. The second arrowhead extends backwards from the point `(x_end,y_end)` determined by the `X` and `Y` properties.

Example: `15`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Head1Width` — Width of first arrowhead

`10` (default) | scalar numeric value

Width of the first arrowhead, specified as a scalar numeric value in point units. One point equals 1/72 inch. The first arrowhead is located at the point `(x_begin,y_begin)` determined by the `X` and `Y` properties.

Example: 15

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

Head2Width — Width of second arrowhead

10 (default) | scalar numeric value

Width of the second arrowhead, specified as a scalar numeric value in point units. One point equals 1/72 inch. The second arrowhead is located at the point (x_end,y_end) determined by the X and Y properties.

Example: 15

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

Location and Size

X — Beginning and ending x-coordinates

[0.3 0.4] (default) | two-element vector

Beginning and ending *x*-coordinates, specified as a two-element vector of the form [x_begin x_end].

By default, the units are normalized to the figure. The lower-left corner of the figure maps to (0,0) and the upper-right corner maps to (1,1). To change the units, use the Units property.

Example: [0.2 0.3]

Y — Beginning and ending y-coordinates

[0.3 0.4] (default) | two-element vector

Beginning and ending *y*-coordinates, specified as a two-element vector of the form [y_begin y_end].

By default, the units are normalized to the figure. The lower-left corner of the figure maps to (0,0) and the upper-right corner maps to (1,1). To change the units, use the Units property.

Example: [0.2 0.3]

`Position` — Size and location

`[0.3 0.3 0.1 0.1]` (default) | four-element vector

Size and location, specified as a four-element vector of the form `[x_begin y_begin dx dy]`. The first two elements specify the coordinates for the beginning of the arrow. The second two elements specify the slope of the arrow.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)` and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.5 0.5 0.2 0.3]`

`Units` — Position units

`'normalized'` (default) | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

`Units`	Description
`'normalized'` (default)	Normalized with respect to the figure, uipanel, or uitab that contains the annotation. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems:

Units	Description
	• On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units are measured from the lower-left corner of the figure window.

This property affects the `Position` property. If you change the units, then it is good practice to return it to the default value after completing your computation to prevent affecting other functions that assume `Units` is set to the default value.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the object, then the order of specification matters. If you want to define the position with particular units, then you must set the `Units` property before the `Position` property.

See Also

See Also

`annotation`

Topics

"Access Property Values"
"Graphics Object Properties"

Ellipse Properties

Control ellipse appearance and behavior

Description

`Ellipse` properties control the appearance and behavior of an `Ellipse` object. By changing property values, you can modify certain aspects of the ellipse.

Starting in R2014b, you can use dot notation to query and set properties.

```
an = annotation('ellipse');
c = an.Color;
an.Color = 'red';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Color` — Outline color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Outline color, specified as an RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you specify the `Color` as `'none'`, then the outline is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`

Long Name	Short Name	RGB Triplet
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

FaceColor — Fill color
'none' (default) | RGB triplet | character vector of color name

Fill color, specified as 'none', an RGB triplet, or a character vector of a color name. The 'none' option makes the fill invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width of ellipse outline, specified as a positive value in point units. One point equals 1/72 inch.

Example: `0.75`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Location and Size

`Position` — Size and location

`[0.3 0.3 0.1 0.1]` (default) | four-element vector

Size and location, specified as a four-element vector of the form `[x y length height]`. The first two elements specify the coordinates of the lower-left corner of the smallest rectangle that enclose the ellipse. The second two elements specify length and height of the rectangle.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)` and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.2 0.3 0.4 0.5]`

`Units` — Position units
`'normalized'` (default) | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

Units	Description
`'normalized'` (default)	Normalized with respect to the figure, uipanel, or uitab that contains the annotation. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units are measured from the lower-left corner of the figure window.

This property affects the `Position` property. If you change the units, then it is good practice to return it to the default value after completing your computation to prevent affecting other functions that assume `Units` is set to the default value.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the object, then the order of specification matters. If you want to define the position with particular units, then you must set the `Units` property before the `Position` property.

See Also

See Also

`annotation`

Topics

"Access Property Values"
"Graphics Object Properties"

Annotation Line Properties

Control annotation line appearance and behavior

Description

Annotation line properties control the appearance and behavior of an annotation line object. By changing property values, you can modify certain aspects of the line.

Starting in R2014b, you can use dot notation to query and set properties.

```
h = annotation('line');
c = h.Color;
h.Color = 'red';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in point units. One point equals 1/72 inch.

Example: `0.75`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Color` — Line color

`[0 0 0]` (default) | RGB triplet | character vector of a color name

Line color, specified as an RGB triplet or a character vector of a color name. The default RGB triplet value of `[0 0 0]` corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

Location and Size

`X` — Beginning and ending x-coordinates

`[0.3 0.4]` (default) | two-element vector

Beginning and ending *x*-coordinates, specified as a two-element vector of the form `[x_begin x_end]`.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)` and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.2 0.3]`

Y — Beginning and ending y-coordinates

`[0.3 0.4]` (default) | two-element vector

Beginning and ending *y*-coordinates, specified as a two-element vector of the form `[y_begin y_end]`.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)` and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.2 0.3]`

Position — Size and location

`[0.3 0.3 0.1 0.1]` (default) | four-element vector

Size and location, specified as a four-element vector of the form `[x_begin y_begin dx dy]`. The first two elements specify the coordinates of the starting point of the line. The second two elements specify the slope of the line.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)` and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property. To change the units, use the `Units` property.

Example: `[0.2 0.2 0.3 0.3]`

Units — Position units

`'normalized'` (default) | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

Units	Description
`'normalized'` (default)	Normalized with respect to the figure, uipanel, or uitab that contains the annotation. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.

Units	Description
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units are measured from the lower-left corner of the figure window.

This property affects the `Position` property. If you change the units, then it is good practice to return it to the default value after completing your computation to prevent affecting other functions that assume `Units` is set to the default value.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the object, then the order of specification matters. If you want to define the position with particular units, then you must set the `Units` property before the `Position` property.

See Also

See Also

`annotation`

Topics

"Access Property Values"
"Graphics Object Properties"

Annotation Rectangle Properties

Control annotation rectangle appearance and behavior

Description

Annotation rectangle properties control the appearance and behavior of an annotation rectangle object. By changing property values, you can modify certain aspects of the rectangle.

Starting in R2014b, you can use dot notation to query and set properties.

```
h = annotation('rectangle');
c = h.Color;
h.Color = 'red';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Color` — Outline color
`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Outline color, specified as an RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you specify the `Color` as `'none'`, then the outline is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`

Long Name	Short Name	RGB Triplet
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

FaceColor — Fill color

'none' (default) | RGB triplet | character vector of color name

Fill color, specified as 'none', an RGB triplet, or a character vector of a color name. The 'none' option makes the fill invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

`FaceAlpha` — Fill transparency

`1` (default) | value in range `[0,1]`

Fill transparency, specified as a scalar value in the range `[0,1]`. A value of `1` is opaque and `0` is completely transparent. Values between `0` and `1` are semitransparent.

Example: `0.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width of rectangle outline, specified as a positive value in point units. One point equals 1/72 inch.

Example: `0.75`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Location and Size

`Position` — Size and location

`[0.3 0.3 0.1 0.1]` (default) | four-element vector

Size and location, specified as a four-element vector of the form `[x y length height]`. The first two elements specify the coordinates of the lower left corner of the rectangle. The second two elements specify the length and height of the rectangle.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)` and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.2 0.3 0.4 0.5]`

`Units` — Position units

`'normalized'` (default) | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

`Units`	Description
`'normalized'` (default)	Normalized with respect to the figure, uipanel, or uitab that contains the annotation. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch.

Units	Description
	• On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units are measured from the lower-left corner of the figure window.

This property affects the `Position` property. If you change the units, then it is good practice to return it to the default value after completing your computation to prevent affecting other functions that assume `Units` is set to the default value.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the object, then the order of specification matters. If you want to define the position with particular units, then you must set the `Units` property before the `Position` property.

See Also

See Also

`annotation`

Topics

"Access Property Values"
"Graphics Object Properties"

TextArrow Properties

Control text arrow appearance and behavior

Description

`TextArrow` properties control the appearance and behavior of a `TextArrow` object. By changing property values, you can modify certain aspects of the text arrow.

Starting in R2014b, you can use dot notation to query and set properties.

```
ta = annotation('textarrow');
s = ta.FontSize;
ta.FontSize = 12;
```

If you are using an earlier release, use the `get` and `set` functions instead.

Text

`String` — Text to display

`''` (default) | character array | string array | cell array | numeric value

Text to display, specified as a character array, string array, cell array, or numeric value.

Example: `'my label'`

Example: `string('my label')`

Example: `{'first line','second line'}`

Example: `123`

To include numeric variables with text, use the `num2str` function. For example:

```
x = 42;
str = ['The value is ',num2str(x)];
```

To include special characters, such as superscripts, subscripts, Greek letters, or mathematical symbols use TeX markup. For a list of supported markup, see the `Interpreter` property.

To create multiline text:

- Use a string array, where each element contains a line of text, such as `string({'line one','line two'})`.
- Use a cell array, where each cell contains a line of text, such as `{'first line','second line'}`.
- Use a character array, where each row contains the same number of characters, such as `['abc'; 'ab ']`.
- Use `sprintf` to create text with a new line character, such as `sprintf('first line \n second line')`. This property converts text with new line characters to cell arrays.

Text that contains only a numeric value is converted using `sprintf('%g',value)`. For example, `12345678` displays as `1.23457e+07`.

Note: The words `default`, `factory`, and `remove` are reserved words that will not appear in text when quoted as a normal characters. To display any of these words individually, precede them with a backslash, such as `'\default'` or `'\remove'`.

`Interpreter` — Interpretation of text characters

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value in point units to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Font color — Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\ast	*	\chi	χ	\infty	∞
\beta	β	\psi	ψ	\clubsuit	♣
\gamma	γ	\omega	ω	\diamondsuit	♦
\delta	δ	\Gamma	Γ	\heartsuit	♥
\epsilon	ε	\Delta	Δ	\spadesuit	♠
\zeta	ζ	\Theta	Θ	\leftrightarrow	↔
\eta	η	\Lambda	Λ	\leftarrow	←
\theta	θ	\Xi	Ξ	\Leftarrow	⇐
\vartheta	ϑ	\Pi	Π	\uparrow	↑
\iota	ι	\Sigma	Σ	\rightarrow	→
\kappa	κ	\Upsilon	ϒ	\Rightarrow	⇒
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\lfloor	⌊	\times	x	\ldots	…
\perp	⊥	\surd	√	\prime	′
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

`TextColor` — Text color
`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you set the color to `'none'`, then the text is invisible.

Note: Setting the `Color` property changes the `TextColor` property to the same value, unless you explicitly set the `TextColor` property.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

`[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`TextRotation` — Text rotation angle in degrees

`0` (default) | scalar numeric value

Text rotation angle in degrees, specified as a scalar numeric value. Set this property to a positive value to rotate the text counterclockwise. Angles are absolute and not relative to previous rotations. A rotation of 0 degrees is always horizontal.

Example: `90`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Font Style

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font might look the same as the normal font.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

`FontName` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`FontSize` — Font size

`10` (default) | scalar value greater than 0

Font size, specified as a scalar value greater than 0 in point units. One point equals 1/72 inch. To change the font units, use the `FontUnits` property.

Example: `12`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`FontUnits` — Font size units

`'points'` (default) | `'inches'` | `'centimeters'` | `'normalized'` | `'pixels'`

Font size units, specified as one of the values in this table.

Units	Description
`'points'`	Points. One point equals 1/72 inch.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'normalized'`	Interpret font size as a fraction of the parent container height, typically a figure. If you resize the container, the font size modifies accordingly. For example, if the

Units	Description
	`FontSize` is `0.1` in normalized units, then the text is 1/10 of the container height.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

If you set both the font size and the font units in one function call, you must set the `FontUnits` property first so that the axes correctly interprets the specified font size.

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

Text Box

`TextLineWidth` — Width of text box outline

`0.5` (default) | scalar numeric value

Width of text box outline, specified as a scalar numeric value in point units. One point equals `1/72` inch.

Example: `1.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`TextEdgeColor` — Color of text box outline

`'none'` (default) | RGB triplet | character vector of color name

Color of text box outline, specified as `'none'`, a three-element RGB triplet, or a character vector of a color name. If the color is `'none'`, the box outline is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`TextBackgroundColor` — Color of text box background

`'none'` (default) | RGB triplet | character vector of color name

Color of text box background, specified as `'none'`, a three-element RGB triplet, or a character vector of a color name. If the color is `'none'`, the background color is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`TextMargin` — Space around text within text box

2 (default) | scalar numeric value

Space around the text within the text box, specified as a scalar numeric value in pixel units.

Example: `10`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Arrow

`Color` — Arrow color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Arrow color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you set the color to `'none'`, then the arrow is invisible.

Note: Setting this property also changes the text color if you have not explicitly set the text color using the `TextColor` property.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	

Line Style	Description	Resulting Line
`'none'`	No line	No line

`LineWidth` — Width of arrow stem

`0.5` (default) | scalar numeric value

Width of arrow stem, specified as a scalar numeric value greater than zero in point units. One point equals `1/72` inch. The default value is `0.5` points.

Example: `0.75`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`HeadStyle` — Style of arrowhead

`'vback2'` (default) | `'plain'` | `'ellipse'` | `'vback1'` | `'vback3'` | `'cback1'` | ...

Style of the arrowhead, specified as one of the head style options in this table.

Style	Result	Style	Result
`'plain'`		`'fourstar'`	
`'ellipse'`		`'rectangle'`	
`'vback1'`		`'diamond'`	
`'vback2'` (default)		`'rose'`	
`'vback3'`		`'hypocycloid'`	
`'cback1'`		`'astroid'`	
`'cback2'`		`'deltoid'`	
`'cback3'`		`'none'`	No arrowhead

`HeadLength` — Length of arrowhead

`10` (default) | scalar numeric value

Length of the arrowhead, specified as a scalar numeric value in point units. One point equals `1/72` inch.

Example: `15`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`HeadWidth` — Width of arrowhead

`10` (default) | scalar numeric value

Width of the arrowhead, specified as a scalar numeric value in point units. One point equals `1/72` inch.

Example: `15`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Location and Size

`X` — Beginning and ending x-coordinates

`[0.3 0.4]` (default) | two-element vector

Beginning and ending *x*-coordinates for the arrow, specified as a two-element vector of the form `[x_begin x_end]`.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)`, and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.2 0.3]`

`Y` — Beginning and ending y-coordinates

`[0.3 0.4]` (default) | two-element vector

Beginning and ending *y*-coordinates for the arrow, specified as a two-element vector of the form `[y_begin y_end]`.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)`, and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.2 0.3]`

`Position` — Size and location

`[0.3 0.3 0.1 0.1]` (default) | four-element vector

Size and location, specified as a four-element vector of the form `[x_begin y_begin length height]`. The first two elements specify the coordinates of the beginning of the arrow. The second two elements specify the length and height of the arrow. The text box extends from the beginning of the arrow.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)`, and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Example: `[0.2 0.2 0.3 0.1]`

`Units` — Position units

`'normalized'` (default) | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

`Units`	Description
`'normalized'` (default)	Normalized with respect to the figure, uipanel, or uitab that contains the annotation. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.
`'pixels'`	Pixels.

Units	Description
	Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units are measured from the lower-left corner of the figure window.

This property affects the `Position` property. If you change the units, then it is good practice to return it to the default value after completing your computation to prevent affecting other functions that assume `Units` is set to the default value.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the object, then the order of specification matters. If you want to define the position with particular units, then you must set the `Units` property before the `Position` property.

`HorizontalAlignment` — Horizontal alignment of text
`'left'` (default) | `'center'` | `'right'`

Horizontal alignment of the text, specified as one of the values in this table. This property is useful when aligning multiple lines of text.

Value	Result
`'left'`	
`'center'`	

Value	Result
`'right'`	

`VerticalAlignment` — Vertical alignment of text with respect to arrow
`'top'` (default) | `'cap'` | `'middle'` | `'baseline'` | `'bottom'`

Vertical alignment of the text with respect to the end of the arrow, specified as `'top'`, `'cap'`, `'middle'`, `'baseline'`, or `'bottom'`.

See Also

See Also
`annotation`

Topics
"Access Property Values"
"Graphics Object Properties"

TextBox Properties

Control text box appearance and behavior

Description

`TextBox` properties control the appearance and behavior of a `TextBox` object. By changing property values, you can modify certain aspects of the text box.

Starting in R2014b, you can use dot notation to query and set properties.

```
t = annotation('textbox');
sz = t.FontSize;
t.FontSize = 12;
```

If you are using an earlier release, use the `get` and `set` functions instead.

Text

`String` — Text to display

`''` (default) | character array | string array | cell array | numeric value

Text to display, specified as a character array, string array, cell array, or numeric value.

Example: `'my label'`

Example: `string('my label')`

Example: `{'first line','second line'}`

Example: `123`

To include numeric variables with text, use the `num2str` function. For example:

```
x = 42;
str = ['The value is ',num2str(x)];
```

To include special characters, such as superscripts, subscripts, Greek letters, or mathematical symbols use TeX markup. For a list of supported markup, see the `Interpreter` property.

To create multiline text:

- Use a string array, where each element contains a line of text, such as `string({'line one','line two'})`.
- Use a cell array, where each cell contains a line of text, such as `{'first line','second line'}`.
- Use a character array, where each row contains the same number of characters, such as `['abc'; 'ab ']`.
- Use `sprintf` to create text with a new line character, such as `sprintf('first line \n second line')`. This property converts text with new line characters to cell arrays.

Text that contains only a numeric value is converted using `sprintf('%g',value)`. For example, `12345678` displays as `1.23457e+07`.

Note: The words `default`, `factory`, and `remove` are reserved words that will not appear in text when quoted as a normal characters. To display any of these words individually, precede them with a backslash, such as `'\default'` or `'\remove'`.

`Interpreter` — Interpretation of text characters

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value in point units to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Font color — Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\ast	*	\chi	χ	\infty	∞
\beta	β	\psi	ψ	\clubsuit	♣
\gamma	γ	\omega	ω	\diamondsuit	♦
\delta	δ	\Gamma	Γ	\heartsuit	♥
\epsilon	ε	\Delta	Δ	\spadesuit	♠
\zeta	ζ	\Theta	Θ	\leftrightarrow	↔
\eta	η	\Lambda	Λ	\leftarrow	←
\theta	θ	\Xi	Ξ	\Leftarrow	⇐
\vartheta	ϑ	\Pi	Π	\uparrow	↑
\iota	ι	\Sigma	Σ	\rightarrow	→
\kappa	κ	\Upsilon	ϒ	\Rightarrow	⇒
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

Font Style

`Color` — Text color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you set the color to `'none'`, then the text is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

FontAngle — Character slant

'normal' (default) | 'italic'

Character slant, specified as 'normal' or 'italic'. Not all fonts have both font styles. Therefore, the italic font might look the same as the normal font.

Note: The 'oblique' value has been removed. Use 'italic' instead.

FontName — Font name

system supported font name | 'FixedWidth'

Font name, specified as the name of the font to use or 'FixedWidth'. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use 'FixedWidth'. The 'FixedWidth' value relies on the root FixedWidthFontName property. Setting the root FixedWidthFontName property causes an immediate update of the display to use the new font.

Example: 'Cambria'

FontSize — Font size

10 (default) | scalar value greater than 0

Font size, specified as a scalar value greater than 0 in point units. One point equals 1/72 inch. To change the font units, use the `FontUnits` property.

Example: `12`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`FontUnits` — Font size units
`'points'` (default) | `'inches'` | `'centimeters'` | `'normalized'` | `'pixels'`

Font size units, specified as one of the values in this table.

Units	Description
`'points'`	Points. One point equals 1/72 inch.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'normalized'`	Interpret font size as a fraction of the parent container height, typically a figure. If you resize the container, the font size modifies accordingly. For example, if the `FontSize` is `0.1` in normalized units, then the text is 1/10 of the container height.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

If you set both the font size and the font units in one function call, you must set the `FontUnits` property first so that the axes correctly interprets the specified font size.

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

Text Box

`LineStyle` — Line style of box outline

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style of box outline, specified as one of the options listed in this table.

Line Style	Description
`'-'`	Solid line
`'--'`	Dashed line
`':'`	Dotted line
`'-.'`	Dash-dotted line
`'none'`	Box outline is invisible

`LineWidth` — Width of box outline

`0.5` (default) | scalar numeric value

Width of box outline, specified as a scalar numeric value in point units. One point equals 1/72 inch.

Example: `1.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`EdgeColor` — Color of box outline

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Color of box outline, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you set the color to `'none'`, then the box outline is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`BackgroundColor` — Color of text box background

`'none'` (default) | RGB triplet | character vector of color name

Color of text box background, specified as `'none'`, a three-element RGB triplet, or a character vector of a color name. If you set the background color to `'none'`, then the background is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

FaceAlpha — Transparency of background color

1 (default) | scalar value between 0 and 1 inclusive

Transparency of the background color, specified as a scalar value between 0 and 1. If the value is 1, then the color is opaque. To add transparency, set the property to a value closer to 0, where 0 is completely transparent.

FitBoxToText — Option to fit box width and height to text

'on' (default) | 'off'

Option to fit the box width and height to the text, specified as one of these values:

- 'on' — Resize the text box to fit the text.
- 'off' — Wrap the text to fit the width of the text box. Wrapping can cause some of the text to extend below the text box.

If you resize a text box when in plot edit mode, or if you change the Position property, then the FitBoxToText property changes to 'off'.

Margin — Space around text within the text box

5 (default) | scalar numeric value

The space around the text within the text box, specified as a scalar numeric value in pixel units.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Location and Size

`Position` — Size and location

`[0.3 0.3 0.1 0.1]` (default) | four-element vector

Size and location, specified as a four-element vector of the form `[x_begin y_begin length height]`. The first two elements specify the coordinates for the lower-left corner of the text box. The second two elements specify the length and height of the text box.

By default, the units are normalized to the figure. The lower-left corner of the figure maps to `(0,0)`, and the upper-right corner maps to `(1,1)`. To change the units, use the `Units` property.

Note: If the `FitBoxToText` property is set to `'on'` and you change the `String` property, then the `Position` property might not reflect the latest changes until the next time the screen refreshes. To ensure that the position value reflects the latest changes, call `drawnow` before querying the position when working in a script or function.

Example: `[0.2 0.3 0.4 0.5]`

`Units` — Position units

`'normalized'` (default) | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

`Units`	Description
`'normalized'` (default)	Normalized with respect to the figure, uipanel, or uitab that contains the annotation. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.

Units	Description
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units are measured from the lower-left corner of the figure window.

This property affects the `Position` property. If you change the units, then it is good practice to return it to the default value after completing your computation to prevent affecting other functions that assume `Units` is set to the default value.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the object, then the order of specification matters. If you want to define the position with particular units, then you must set the `Units` property before the `Position` property.

`HorizontalAlignment` — Horizontal alignment of text within text box

`'left'` (default) | `'center'` | `'right'`

Horizontal alignment of the text within the text box, specified as one of the values in this table.

Value	Result
`'left'`	left
`'center'`	center
`'right'`	right

`VerticalAlignment` — Vertical alignment of text within text box
`'top'` (default) | `'middle'` | `'bottom'`

Vertical alignment of the text within the text box, specified as one of the values in this table.

Value	Result
`'top'`	top
`'middle'`	middle
`'bottom'`	bottom

Note: The `'cap'` and `'baseline'` values are not recommended. Use the `'top'` and `'bottom'` values, respectively, instead.

See Also

See Also

`annotation`

Topics

"Access Property Values"
"Graphics Object Properties"

ans

Most recent answer

Syntax

```
ans
```

Description

The MATLAB software creates the `ans` variable automatically when you specify no output argument.

Examples

The statement

```
2+2
```

is the same as

```
ans = 2+2
```

See Also

`display`

Introduced before R2006a

any

Determine if any array elements are nonzero

Syntax

```
B = any(A)
B = any(A,dim)
```

Description

`B = any(A)` tests along the first array dimension of `A` whose size does not equal 1, and determines if any element is a nonzero number or logical `1` (`true`). In practice, `any` is a natural extension of the logical OR operator.

- If `A` is a vector, then `B = any(A)` returns logical `1` (`true`) if any of the elements of `A` is a nonzero number or is logical `1`, and returns logical `0` (`false`) if all the elements are zero.
- If `A` is a nonempty, nonvector matrix, then `B = any(A)` treats the columns of `A` as vectors, returning a row vector of logical `1`s and `0`s.
- If `A` is an empty 0-by-0 matrix, `any(A)` returns logical `0` (`false`).
- If `A` is a multidimensional array, `any(A)` acts along the first array dimension whose size does not equal 1 and returns an array of logical values. The size of this dimension becomes `1`, while the sizes of all other dimensions remain the same.

`B = any(A,dim)` tests elements along dimension `dim`. The dim input is a positive integer scalar.

Examples

Test Matrix Columns

Create a 3-by-3 matrix.

```
A = [0 0 3;0 0 3;0 0 3]
```

```
A =

     0     0     3
     0     0     3
     0     0     3
```

Test each column for nonzero elements.

```
B = any(A)
```

```
B = 1×3 logical array
   0   0   1
```

Reduce a Logical Vector to a Single Condition

Create a vector of decimal values and test which values are less than 0.5.

```
A = [0.53 0.67 0.01 0.38 0.07 0.42 0.69];
B = (A < 0.5)
```

```
B = 1×7 logical array
   0   0   1   1   1   1   0
```

The output is a vector of logical values. The `any` function reduces such a vector of logical values to a single condition. In this case, `B = any(A < 0.5)` yields logical `1`.

This makes `any` particularly useful in `if` statements.

```
if any(A < 0.5)

%do something

else

%do something else

end
```

The code is executed depending on a single condition, rather than a vector of possibly conflicting conditions.

Test Arrays of Any Dimension

Create a 3-by-7-by-5 multidimensional array and test to see if any of its elements are greater than 3.

```
A = rand(3,7,5) * 5;
B = any(A(:) > 3)
```

```
B = logical
   1
```

You can also test the array for elements that are less than zero.

```
B = any(A(:) < 0)
```

```
B = logical
   0
```

The syntax `A(:)` turns the elements of `A` into a single column vector, so you can use this type of statement on an array of any size.

Test Matrix Rows

Create a 3-by-3 matrix.

```
A = [0 0 3;0 0 3;0 0 3]
```

```
A =

     0     0     3
     0     0     3
     0     0     3
```

Test the rows of `A` for nonzero elements by specifying `dim = 2`.

```
B = any(A,2)
```

```
B = 3×1 logical array
   1
   1
   1
```

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. The `any` function ignores elements of `A` that are `NaN` (Not a Number).

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional input array, `A`:

- `any(A,1)` works on successive elements in the columns of `A` and returns a row vector of logical values.
- `any(A,2)` works on successive elements in the rows of `A` and returns a column vector of logical values.

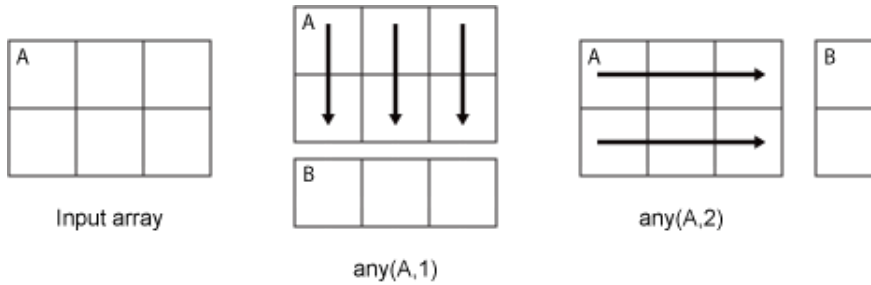

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

B — Logical array
scalar | vector | matrix | multidimensional array

Logical array, returned as a scalar, vector, matrix, or multidimensional array. The dimension of A acted on by any has size 1 in B.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also
all | colon | or | prod | sum

Topics
"Reduce Logical Arrays to Single Value"

Introduced before R2006a

area

Filled area 2-D plot



Syntax

```
area(Y)
area(X,Y)
area(...,basevalue)
area(...,Name,Value)
area(ax,...)
ar = area(...)
```

Description

An area graph displays elements in `Y` as one or more curves and fills the area beneath each curve. When `Y` is a matrix, the curves are stacked showing the relative contribution of each row element to the total height of the curve at each x interval.

`area(Y)` plots the vector `Y` or plots each column in matrix `Y` as a separate curve and stacks the curves. The *x*-axis automatically scales to `1:size(Y,1)`. The values in `Y` can be numeric or duration values.

`area(X,Y)` plots `Y` versus `X` and fills the area between `0` and `Y`. The values in `X` can be numeric, datetime, duration or categorical values.

- If `Y` is a vector, then specify `X` as a vector of increasing values with length equal to `Y`. If the values in `X` are not increasing, then `area` sorts the values before plotting.
- If `Y` is a matrix, then specify `X` as a vector of increasing values with length equal to the number of rows in `Y`. `area` plots the columns of `Y` as filled areas. For each `X`, the net

result is the sum of corresponding values from the rows of `Y`. You also can specify `X` as a matrix with size equal to `Y`. To avoid unexpected output when `X` is a matrix, specify `X` so that the columns repeat.

`area(...,basevalue)` specifies the base value for the area fill. The default `basevalue` is `0`. Specify the base value as a numeric value.

`area(...,Name,Value)` modifies the area chart using one or more name-value pair arguments.

`area(ax,...)` plots into the axes `ax` instead of into the current axes (`gca`).

`ar = area(...)` returns one or more `Area` objects. The `area` function creates one `Area` object for vector input arguments. It creates one object per column for matrix input arguments.

Creating an area graph of an *m*-by-*n* matrix creates *n* area objects (that is, one per column), whereas a 1-by-*n* vector creates one area object.

Some area object properties that you set on an individual area object set the values for all area objects in the graph. See Area Properties for information on specific properties.

Examples

Create Area Graph

Plot the data in matrix Y as an area graph.

```
Y = [1, 5, 3;
     3, 2, 7;
     1, 5, 3;
     2, 6, 1];
figure
area(Y)
```

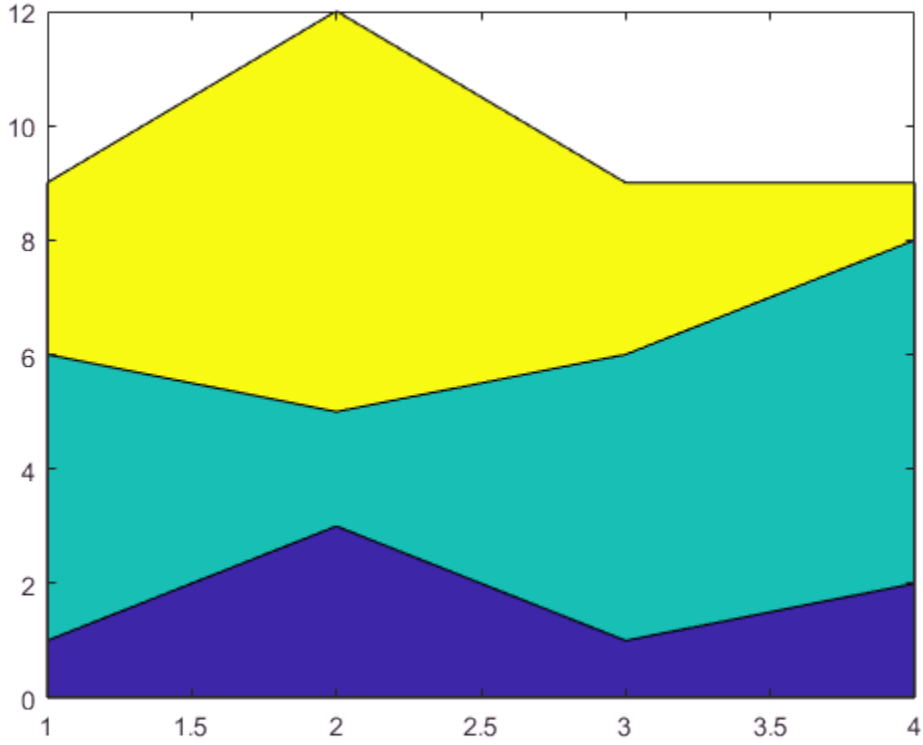

Adjust Base Value of Area Graph

By default, `area` uses the *y*-axis as the base value. Change the base value by setting the `basevalue` input argument to -4.

```
Y = [1, 5, 3;
     3, 2, 7;
     1, 5, 3;
     2, 6, 1];
figure
basevalue = -4;
area(Y,basevalue)
```

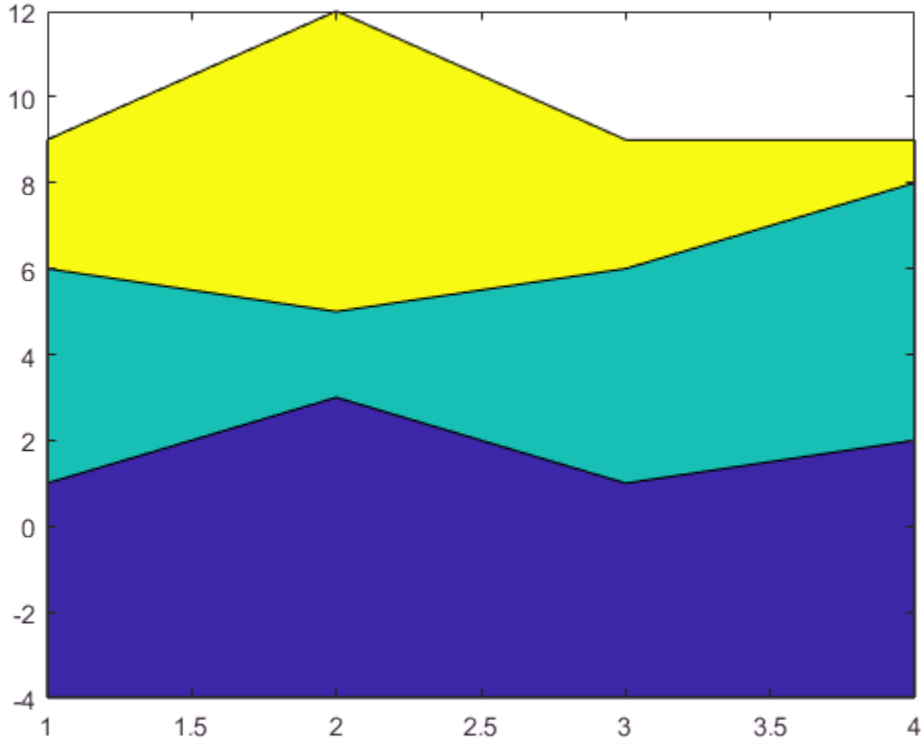

Specify Color and Line Style for Area Plot

Create an area plot of `Y` and use a dotted line style. Return the three area objects in array `h`. The `area` function creates one area object for each column in `Y`.

```
Y = [1, 5, 3;
     3, 2, 7;
     1, 5, 3;
     2, 6, 1];
h = area(Y,'LineStyle',':');
```

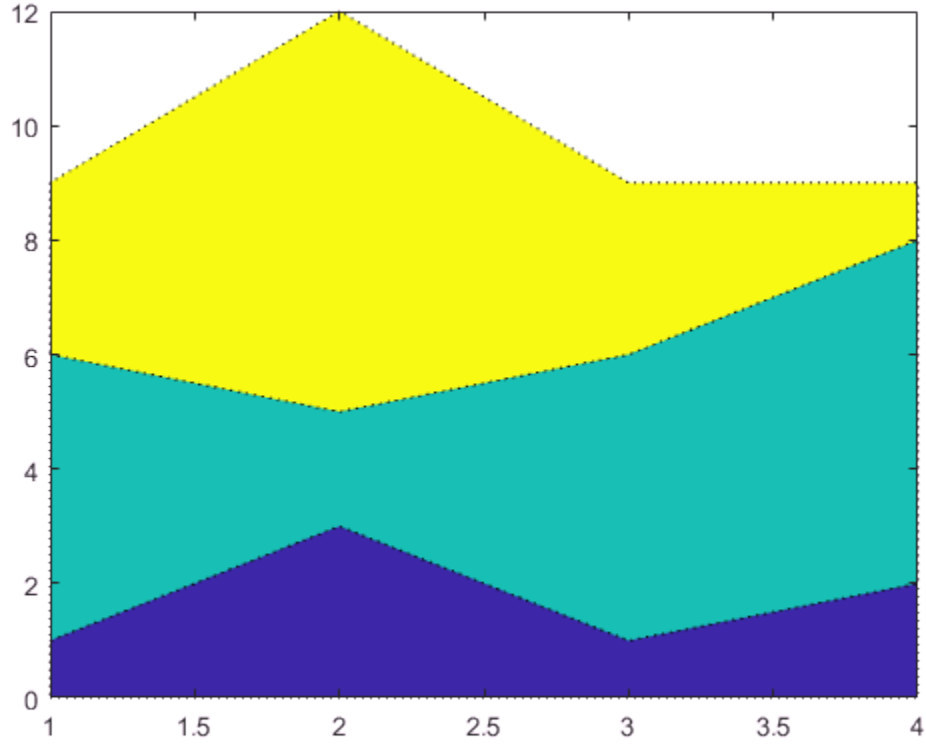

Change the area colors using RGB triplet color values. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
h(1).FaceColor = [0 0.25 0.25];
h(2).FaceColor = [0 0.5 0.5];
h(3).FaceColor = [0 0.75 0.75];
```

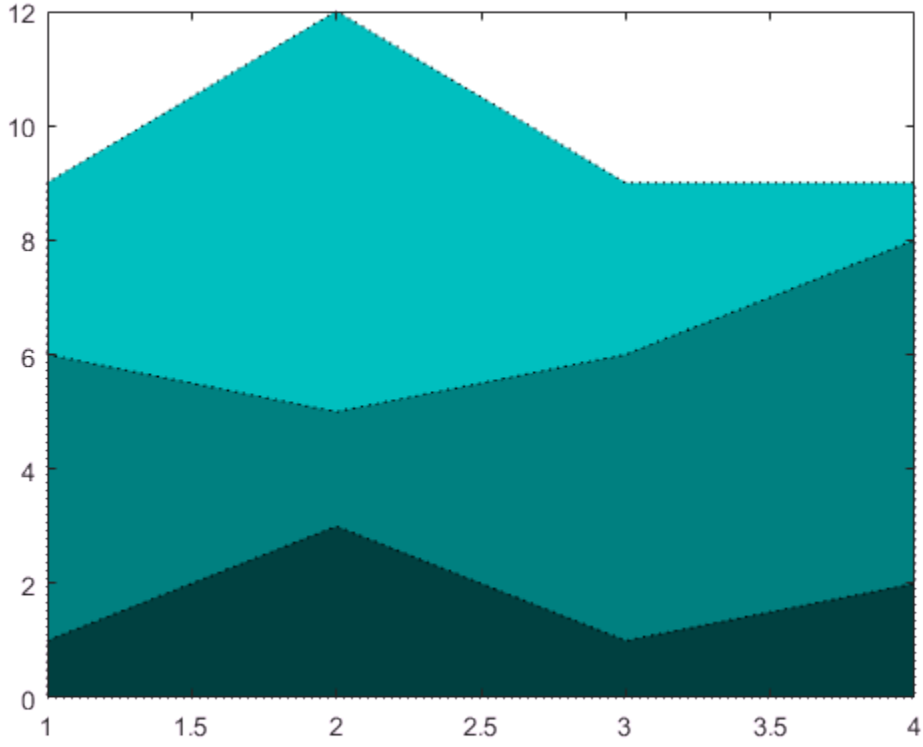

- "Plot Dates and Durations"
- "Plot Categorical Data"

Tips

- If `Y` contains `NaN` values, then the `area` function breaks up the area around the missing values.

See Also

See Also

Functions

`bar` | `plot` | `sort`

Properties

Area Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"
"Compare Data Sets Using Overlayed Area Graphs"

Introduced before R2006a

Area Properties

Control area chart appearance and behavior

Description

`Area` properties control the appearance and behavior of an `Area` object. By changing property values, you can modify certain aspects of the area chart.

Starting in R2014b, you can use dot notation to query and set properties.

```
ar = area(1:10);
ec = ar.EdgeColor;
ar.EdgeColor = 'red';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`EdgeColor` — Area outline color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'` | `'flat'`

Area outline color, specified as one of these values:

- `'none'` — Do not draw the outline.
- `'flat'` — Use colors from the axes colormap.
- RGB triplet or character vector of color name — Specify a custom color. The default RGB triplet value of `[0 0 0]` corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

FaceColor — Area fill color

'flat' (default) | 'none' | RGB triplet | character vector of color name

Area fill color, specified as one of these values:

- 'flat' — Use colors from the axes colormap.
- 'none' — Do not use any color for the fill, which allows the background to show through.
- RGB triplet or character vector of color name — Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]

Long Name	Short Name	RGB Triplet
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`EdgeAlpha` — Edge transparency
`1` (default) | scalar in range `[0,1]`

Edge transparency, specified as a scalar in the range `[0,1]`. A value of 1 is opaque and 0 is completely transparent. Values between 0 and 1 are semitransparent.

Example: `a.EdgeAlpha = 0.5;`

`FaceAlpha` — Face transparency
`1` (default) | scalar in range `[0,1]`

Face transparency, specified as a scalar in the range `[0,1]`. A value of 1 is opaque and 0 is completely transparent. Values between 0 and 1 are semitransparent.

Example: `a.FaceAlpha = 0.5;`

`LineStyle` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Area outline width
`0.5` (default) | scalar numeric value

Area outline width, specified as a scalar numeric value in point units. One point equals 1/72 inch.

Example: `1.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`AlignVertexCenters` — Sharp vertical and horizontal lines

`'off'` (default) | `'on'`

Sharp vertical and horizontal lines, specified as `'off'` or `'on'`.

If the associated figure has a GraphicsSmoothing property set to `'on'` and a Renderer property set to `'opengl'`, then the figure applies a smoothing technique to plots. In some cases, this smoothing technique can cause vertical and horizontal lines to appear uneven in thickness or color. Use the `AlignVertexCenters` property to eliminate the uneven appearance.

- `'off'` — Do not sharpen vertical or horizontal lines. The lines might appear uneven in thickness or color.
- `'on'` — Sharpen vertical and horizontal lines to eliminate an uneven appearance.

Note: You must have a graphics card that supports this feature. To see if the feature is supported, type `opengl info`. If it is supported, then the returned fields contain the line `SupportsAlignVertexCenters: 1`.

Baseline

`BaseLine` — Baseline

baseline object

This property is read-only.

Baseline object. For a list of baseline properties, see Baseline Properties.

`BaseValue` — Baseline value

`0` (default) | numeric scalar value

Baseline value, specified as a numeric scalar value.

The baseline value that you specify applies to either the *x*-axis or the *y*-axis depending on the bar chart orientation. If you change the orientation of the bar chart from vertical to horizontal, or vice versa, the baseline value might change. Set the `BaseValue` property after setting the `Horizontal` property.

`ShowBaseLine` — Baseline visibility

`'on'` (default) | `'off'`

Baseline visibility, specified as one of these values:

- `'on'` — Show the baseline.
- `'off'` — Hide the baseline.

Data

`XData` — *x*-coordinates

[ ] (default) | vector

x-coordinates, specified as a vector. Alternatively, specify the *x*-coordinates using the input argument `X` to the `area` function. If you do not specify `X`, then `area` uses the indices of the values in `YData` as the *x*-coordinates.

`XData` and `YData` must have equal lengths.

Example: `1:10`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`YData` — *y*-coordinates

[ ] (default) | vector

y-coordinates, specified as a vector. Alternatively, specify the *y*-coordinates using the input argument `Y` to the `area` function.

`XData` and `YData` must have equal lengths.

Example: `1:10`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

XDataSource — Variable linked to XData

'' (default) | character vector containing MATLAB workspace variable name

Variable linked to XData, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the XData.

By default, there is no linked variable so the value is an empty character vector, ''. If you link a variable, then MATLAB does not update the XData values immediately. To force an update of the data values, use the refreshdata function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: 'x'

YDataSource — Variable linked to YData

'' (default) | character vector containing MATLAB workspace variable name

Variable linked to YData, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the YData.

By default, there is no linked variable so the value is an empty character vector, ''. If you link a variable, then MATLAB does not update the YData values immediately. To force an update of the data values, use the refreshdata function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: 'y'

XDataMode — Selection mode for XData

'auto' (default) | 'manual'

Selection mode for XData, specified as one of these values:

- `'auto'` — Use the indices of the values in `YData`.
- `'manual'` — Use manually specified values. To specify the values, set the `XData` property or pass the input argument `X` to the `area` function.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'area'`

This property is read-only.

Type of graphics object, returned as `'area'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag to associate with object

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with

a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

Data Types: `char`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
```

```
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties

cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the `Area` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Area` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Area` object has no effect.

HitTest — Response to captured mouse clicks

'on' (default) | 'off'

Response to captured mouse clicks, specified as one of these values:

- 'on' — Trigger the ButtonDownFcn callback of the Area object. If you have defined the UIContextMenu property, then invoke the context menu.
- 'off' — Trigger the callbacks for the nearest ancestor of the Area object that has a HitTest property set to 'on' and a PickableParts property value that enables the ancestor to capture mouse clicks.

Note: The PickableParts property determines if the Area object can capture mouse clicks. If it cannot, then the HitTest property has no effect.

HitTestArea — (removed) Extents of clickable area

'off' (default) | 'on'

Note: HitTestArea has been removed. Use PickableParts instead.

Extents of clickable area, specified as one of these values:

- 'off' — Click the object to select it. This is the default value.
- 'on' — Click anywhere within the extent of the object to select it, that is, anywhere within the rectangle that encloses the object.

Example: 'off'

Interruptible — Callback interruption

'on' (default) | 'off'

Callback interruption, specified as 'on' or 'off'. The Interruptible property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Area` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Area` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`area`

Topics

"Access Property Values"
"Graphics Object Properties"

array2table

Convert homogeneous array to table

Syntax

```
T = array2table(A)
T = array2table(A,Name,Value)
```

Description

`T = array2table(A)` converts the `m`-by-`n` array, `A`, to an `m`-by-`n` table, `T`. Each column of `A` becomes a variable in `T`.

`array2table` uses the input array name appended with the column number for the variable names in the table. If these names are not valid MATLAB identifiers, `array2table` uses character vectors of the form `'Var1',...,'Var`*`N`*`'`, where *N* is the number of columns in `A`.

`T = array2table(A,Name,Value)` creates a table from an array, `A`, with additional options specified by one or more `Name,Value` pair arguments.

For example, you can specify row names or variable names to include in the table.

Examples

Convert Numeric Array to Table

Create an array of numeric data.

```
A = [1 4 7; 2 5 8; 3 6 9]
```

```
A =

     1     4     7
     2     5     8
     3     6     9
```

Convert the array, A, to a table.

```
T = array2table(A)
```

```
T = 3×3 table
    A1    A2    A3
    __    __    __

    1     4     7
    2     5     8
    3     6     9
```

The table has variable names that append the column number to the input array name, A.

Convert Array to Table Including Variable Names

Create an array of numeric data.

```
A = [1 12 30.48; 2 24 60.96; 3 36 91.44]
```

```
A =

    1.0000   12.0000   30.4800
    2.0000   24.0000   60.9600
    3.0000   36.0000   91.4400
```

Convert the array, A, to a table and include variable names.

```
T = array2table(A,...
    'VariableNames',{'Feet','Inches','Centimeters'})
```

```
T = 3×3 table
    Feet    Inches    Centimeters
    ____    ______    ___________

    1       12        30.48
    2       24        60.96
    3       36        91.44
```

- “Access Data in a Table”

Input Arguments

A — Input array
matrix

Input array, specified as a matrix.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `struct` | `cell`
Complex Number Support: Yes

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'RowNames',{'row1','row2','row3'}` uses the row names, `row1`, `row2`, and `row3` for the table, `T`.

`'RowNames'` — Row names for `T`
`{}` (default) | cell array of character vectors

Row names for `T`, specified as the comma-separated pair consisting of `'RowNames'` and a cell array of character vectors that are nonempty and distinct. The number of character vectors must equal the number of rows, `size(A,1)`.

`'VariableNames'` — Variable names for `T`
cell array of character vectors

Variable names for `T`, specified as the comma-separated pair consisting of `'VariableNames'` and a cell array of character vectors that are nonempty and distinct. The number of character vectors must equal the number of variables, `size(A,2)`.

Furthermore, the variable names must be valid MATLAB identifiers. If valid MATLAB identifiers are not available for use as variable names, MATLAB uses a cell array of *N* character vectors of the form `{'Var1' ... 'VarN'}` where *N* is the number of variables. You can determine valid MATLAB variable names using the function `isvarname`.

Output Arguments

T — Output table
table

Output table, returned as a table. The table can store metadata such as descriptions, variable units, variable names, and row names. For more information, see Table Properties.

Tips

- If A is a cell array, use `cell2table(A)` to create a table from the contents of the cells in A. Each variable in the table is numeric or a cell array of character vectors. `array2table(A)` creates a table where each variable is a column of cells.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'RowNames'` name-value pair is not supported.

For more information, see “Tall Arrays”.

See Also

See Also
`cell2table` | `isvarname` | `struct2table` | `table` | `table2array`

Topics

"Access Data in a Table"

Introduced in R2013b

array2timetable

Convert array to timetable

Syntax

```
TT = array2timetable(X,'RowTimes',rowTimes)
TT = array2timetable(X,'RowTimes',rowTimes,'VariableNames',
{varName1,...,varNameN})
```

Description

`TT = array2timetable(X,'RowTimes',rowTimes)` converts `X` and `rowTimes` to a timetable. `X` is an `M`-by-`N` array and `rowTimes` is an `M`-by-`1` vector of datetime or duration values. Each column of `X` becomes a variable of `TT`. The time values in `rowTimes` label the rows of the timetable. `TT` is an `M`-by-`N` timetable.

For more information on creating and using timetables, see "Timetables".

`TT = array2timetable(X,'RowTimes',rowTimes,'VariableNames',{varName1,...,varNameN})` assigns the names `varName1,...,varNameN` to the variables in `TT`. The variable names must be unique, valid MATLAB identifiers in a cell array.

Examples

Convert Array to Timetable

Convert an array to a timetable. Add a vector of durations as the row times.

```
X = rand(5,3);
Time = [seconds(1):seconds(1):seconds(5)];
TT = array2timetable(X,'RowTimes',Time)
```

```
TT = 5×3 timetable
     Time      X1          X2          X3
    _____    _______     _______     _______
```

```
    1 sec    0.81472    0.09754    0.15761
    2 sec    0.90579     0.2785    0.97059
    3 sec    0.12699    0.54688    0.95717
    4 sec    0.91338    0.95751    0.48538
    5 sec    0.63236    0.96489    0.80028
```

Return the size of the timetable. TT contains five rows and three variables. The set of row times is a table property. The row times are not contained in a table variable.

```
size(TT)
```

```
ans =

     5     3
```

Convert Array to Timetable Including Variable Names

Convert an array to a timetable. Specify the row times as a datetime vector. Specify names for the timetable variables.

```
X = randi([70 90],5,3);
Time = datetime(2016,7,1:5);
varNames = {'Temp1','Temp2','Temp3'};
TT = array2timetable(X,'RowTimes',Time,'VariableNames',varNames)
```

```
TT = 5×3 timetable
        Time        Temp1    Temp2    Temp3
    ___________     _____    _____    _____

    01-Jul-2016     87       72       73
    02-Jul-2016     89       75       90
    03-Jul-2016     72       81       90
    04-Jul-2016     89       90       80
    05-Jul-2016     83       90       86
```

- “Create Timetables”
- “Clean Timetable with Missing, Duplicate, or Nonuniform Times”
- “Resample and Aggregate Data in Timetable”

- "Combine Timetables and Synchronize Their Data"
- "Select Timetable Data by Row Time and Variable Type"
- "Access Data in a Table"

Input Arguments

X — Input matrix

matrix

Input matrix.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `string` | `char` | `categorical` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

Output Arguments

TT — Output timetable

timetable

Output timetable. The timetable can store metadata such as descriptions, variable units, variable names, and row times. For more information, see Timetable Properties.

See Also

See Also

`isvarname` | `summary` | `table2timetable` | `timetable` | `uitable`

Topics

"Create Timetables"
"Clean Timetable with Missing, Duplicate, or Nonuniform Times"
"Resample and Aggregate Data in Timetable"
"Combine Timetables and Synchronize Their Data"
"Select Timetable Data by Row Time and Variable Type"

"Access Data in a Table"
"Tables"
"Represent Dates and Times in MATLAB"

Introduced in R2016b

arrayfun

Apply function to each element of array

Syntax

```
[B1,...,Bm] = arrayfun(func,A1,...,An)
[B1,...,Bm] = arrayfun(func,A1,...,An,Name,Value)
```

Description

`[B1,...,Bm] = arrayfun(func,A1,...,An)` calls the function specified by function handle `func` and passes elements from arrays `A1,...,An`, where `n` is the number of inputs to function `func`. Output arrays `B1,...,Bm`, where `m` is the number of outputs from function `func`, contain the combined outputs from the function calls. The `i`th iteration corresponds to the syntax `[B1(i),...,Bm(i)] = func(A1(i),...,An(i))`. The `arrayfun` function does not perform the calls to function `func` in a specific order.

`[B1,...,Bm] = arrayfun(func,A1,...,An,Name,Value)` calls function `func` with additional options specified by one or more `Name,Value` pair arguments. Possible values for `Name` are `'UniformOutput'` or `'ErrorHandler'`.

Input Arguments

func

Handle to a function that accepts `n` input arguments and returns `m` output arguments.

If function `func` corresponds to more than one function file (that is, if `func` represents a set of overloaded functions), MATLAB determines which function to call based on the class of the input arguments.

A1,...,An

Arrays that contain the `n` inputs required for function `func`. Each array must have the same dimensions. Arrays can be numeric, character, logical, cell, structure, or user-defined object arrays.

If any input A is a user-defined object array, and you overloaded the subsref or size methods, arrayfun requires that:

- The size method returns an array of type double.
- The object array supports linear indexing.
- The product of the sizes returned by the size method does not exceed the limit of the array, as defined by linear indexing into the array.

Name-Value Pair Arguments

Specify optional comma-separated pairs of Name,Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside single quotes (' '). You can specify several name and value pair arguments in any order as Name1,Value1,...,NameN,ValueN.

'UniformOutput'

Logical value, as follows:

true (1)	Indicates that for all inputs, each output from function func is a scalar cell array, scalar structure, or scalar value that is always of the same type and size. The arrayfun function combines the outputs in arrays B1,...,Bm, where m is the number of function outputs. Each output array is of the same type as the individual function outputs.
false (0)	Requests that the arrayfun function combine the outputs into cell arrays B1,...,Bm. The outputs of function func can be of any size or type.

Default: true

'ErrorHandler'

Handle to a function that catches any errors that occur when MATLAB attempts to execute function func. Define this function so that it rethrows the error or returns valid outputs for function func.

MATLAB calls the specified error-handling function with two input arguments:

- A structure with these fields:

identifier	Error identifier.

`message`	Error message text.
`index`	Linear index corresponding to the element of the input cell array at the time of the error.

- The set of input arguments to function `func` at the time of the error.

Output Arguments

`B1,...,Bm`

Arrays that collect the `m` outputs from function `func`. Each array `B` is the same size as each of the inputs `A1,...,An`.

Function `func` can return output arguments of different classes. However, if `UniformOutput` is `true` (the default):

- The individual outputs from function `func` must be scalar values (numeric, logical, or character), scalar structures, or scalar cell arrays.
- The class of a particular output argument must be the same for each set of inputs. The class of the corresponding output array is the same as the class of the outputs from function `func`.

Examples

To run the examples in this section, create a nonscalar structure array with arrays of different sizes in field `f1`.

```
s(1).f1 = rand(3, 6);
s(2).f1 = magic(12);
s(3).f1 = ones(5, 10);
```

Count the number of elements in each `f1` field.

```
counts = arrayfun(@(x) numel(x.f1), s)
```

The syntax `@(x)` creates an anonymous function. This code returns

```
counts =
```

```
    18   144    50
```

Compute the size of each array in the `f1` fields.

```
[nrows, ncols] = arrayfun(@(x) size(x.f1), s)
```

This code returns

```
nrows =
     3    12     5
ncols =
     6    12    10
```

Compute the mean of each column in the `f1` fields of `s`. Because the output is nonscalar, set `UniformOutput` to `false`.

```
averages = arrayfun(@(x) mean(x.f1), s, 'UniformOutput', false)
```

This code returns

```
averages =
    [1x6 double]    [1x12 double]    [1x10 double]
```

Create additional nonscalar structures `t` and `u`, and test for equality between the arrays in fields `f1` across structures `s`, `t`, and `u`.

```
t = s;  t(1).f1(:)=0;
u = s;  u(2).f1(:)=0;

same = arrayfun(@(x,y,z) isequal(x.f1, y.f1, z.f1), s, t, u)
```

This code returns

```
same =
     0     0     1
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- The specified function must not rely on any state, such as `persistent` variables or random number functions like `rand`.
- The `'ErrorHandler'` name-value pair is not supported.
- With the `'UniformOutput'` name-value pair set to `true` (default), the outputs from the specified function must be numeric, logical, characters, or cell arrays.

For more information, see “Tall Arrays”.

See Also

See Also

`cell2mat` | `cellfun` | `spfun` | `splitapply` | `structfun`

Topics

“Anonymous Functions”
“Create Function Handle”

Introduced before R2006a

ascii

Class: FTP

Set FTP transfer type to ASCII

Syntax

```
ascii(ftpobj)
```

Description

`ascii(ftpobj)` sets the download and upload FTP mode to ASCII, which converts new line characters. Use this method only for text files, including HTML pages and Rich Text Format (RTF) files.

Input Arguments

`ftpobj`

FTP object created by ftp.

Examples

Connect to the National Geophysical Data Center (NGDC) FTP server, and switch from binary (default) to ASCII mode:

```
ngdc = ftp('ftp.ngdc.noaa.gov');
ascii(ngdc)
```

FTP service courtesy of the NGDC. See NGDC Privacy Policy, Disclaimer, and Copyright for NGDC terms of service.

See Also

binary | ftp

Introduced before R2006a

asec

Inverse secant in radians

Syntax

```
Y = asec(X)
```

Description

`Y = asec(X)` returns the "Inverse Secant" on page 1-521 ($\sec^{-1}$) of the elements of `X`. The `asec` function operates element-wise on arrays. For real elements of `X` in the interval `[-Inf,-1]` and `[1,Inf]`, `asec` returns values in the interval `[0,pi]`. For real values of `X` in the interval `[-1,1]` and for complex values of `X`, `asec` returns complex values. All angles are in radians.

Examples

Inverse Secant of a Value

```
asec(-2.8)
```

```
ans = 1.9360
```

Inverse Secant of a Vector of Complex Values

Find the inverse secant of the elements of vector `x`. The `asec` function acts on `x` element-wise.

```
x = [0.5i 1+3i -2.2+i];
Y = asec(x)
```

```
Y =
   1.5708 + 1.4436i   1.4749 + 0.2970i   1.9503 + 0.1833i
```

Plot the Inverse Secant Function

Plot the inverse secant function over the intervals $-5 \le x \le -1$ and $1 \le x \le 5$.

```
x1 = -5:0.01:-1;
x2 = 1:0.01:5;
plot(x1,asec(x1),'b')
hold on
plot(x2,asec(x2),'b')
grid on
```

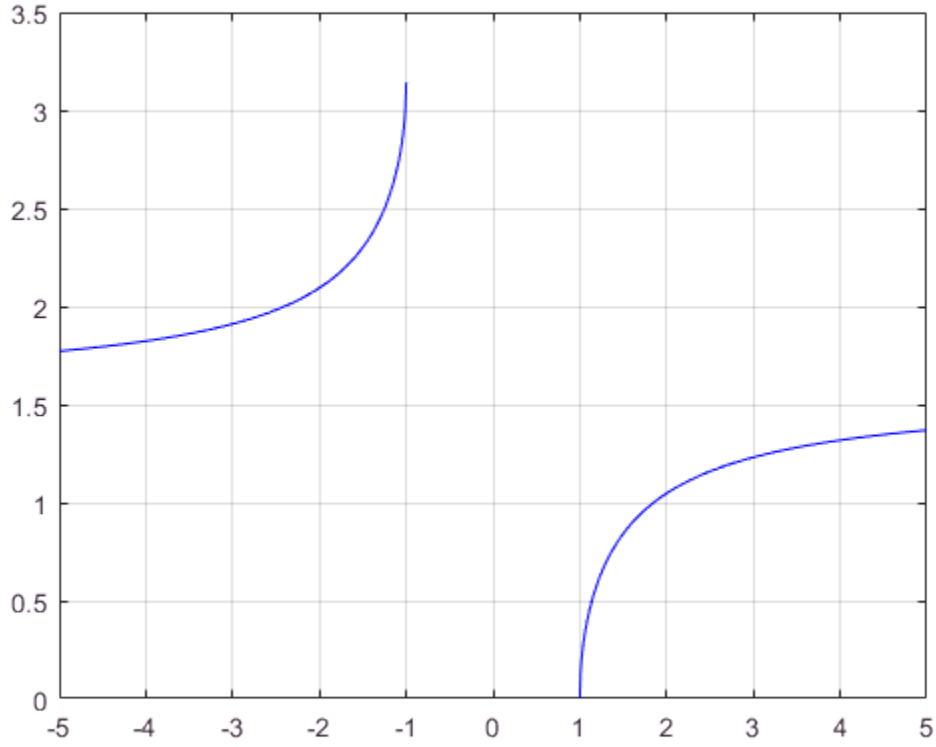

Input Arguments

X — Numeric input

number | vector | matrix | multidimensional array

Numeric input, specified as a number, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Definitions

Inverse Secant

The inverse secant is defined as

$$\sec^{-1}(z) = \cos^{-1}\left(\frac{1}{z}\right).$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`asecd` | `asech` | `sec`

Introduced before R2006a

asecd

Inverse secant in degrees

Syntax

```
Y = asecd(X)
```

Description

`Y = asecd(X)` returns the inverse secant ($\sec^{-1}$) of the elements of `X` in degrees. The function's domain and range include complex values. For real elements of `X` in the domain [-Inf,1] and [1,Inf], `asecd` returns values in the range [0, 180]. For values of `X` outside this range, `asecd` returns complex values.

Examples

Inverse Secant of Vector

```
x = [10 1 Inf];
y = asecd(x)
```

```
y =

   84.2608         0   90.0000
```

The `asecd` operation is element-wise when you pass a vector, matrix, or N-D array.

Inverse Secant of Complex Value

```
asecd(1+i)
```

```
ans =
  64.0864 +30.4033i
```

Input Arguments

X — Secant of angle

scalar value | vector | matrix | N-D array

Secant of angle, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `asecd` operation is element-wise when `X` is non-scalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`asec` | `sec` | `secd`

Introduced before R2006a

asech

Inverse hyperbolic secant

Syntax

```
Y = asech(X)
```

Description

`Y = asech(X)` returns the inverse hyperbolic secant for each element of `X`.

The `asech` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

Examples

Graph of Inverse Hyperbolic Secant Function

Graph the inverse hyperbolic secant over the domain $0.01 \le x \le 1$.

```
x = 0.01:0.001:1;
plot(x,asech(x))
grid on
xlabel('x')
ylabel('y')
```

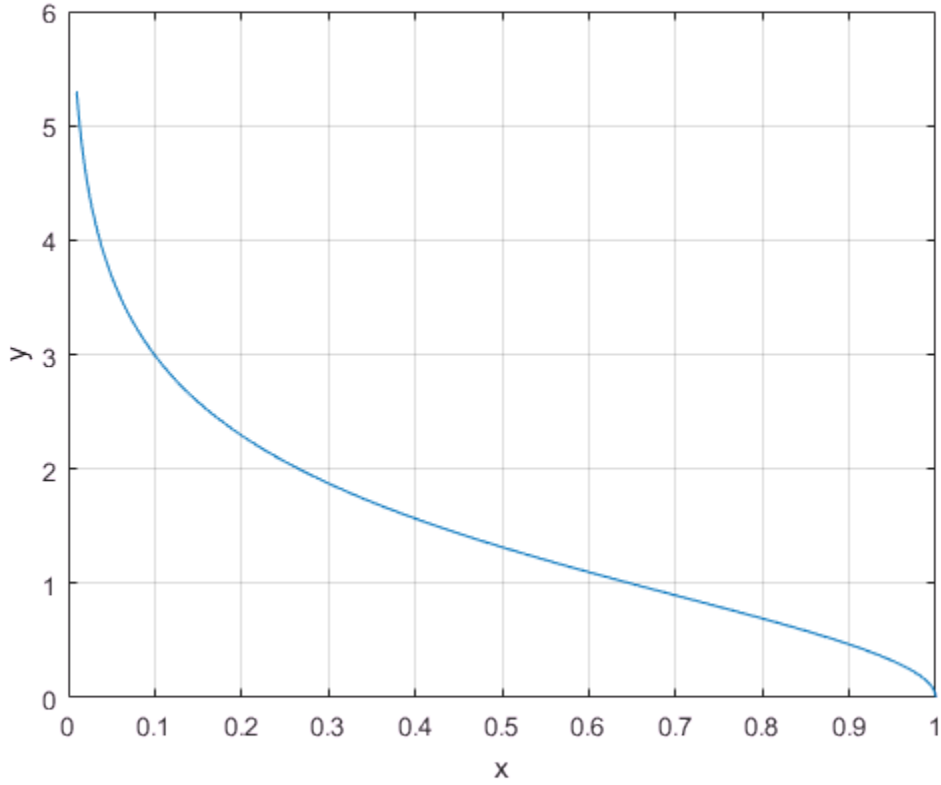

Definitions

Inverse Hyperbolic Secant

For real values x in the domain $0 < x \le 1$, the inverse hyperbolic secant satisfies

$$\operatorname{sech}^{-1}(x) = \cosh^{-1}\left(\frac{1}{x}\right) = \log\left(\frac{1}{x} + \sqrt{\frac{1}{x^2} - 1}\right).$$

For complex numbers $z = x + iy$ as well as real values in the regions $-\infty < z \leq 0$ and $1 \leq z < \infty$, the call `asech(z)` returns complex results.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`asec` | `sech` | `asinh` | `acosh`

Introduced before R2006a

asin

Inverse sine in radians

Syntax

```
y = asin(x)
```

Description

`y = asin(x)` returns the "Inverse Sine" on page 1-531 ($\sin^{-1}$) of the elements of `x`. The `asin` function operates element-wise on arrays. For real elements of `x` in the interval `[-1,1]`, `asin(x)` returns values in the interval `[-pi/2,pi/2]`. For real elements of `x` outside the interval `[-1,1]` and for complex values of `x`, `asin(x)` returns complex values. All angles are in radians.

Examples

Inverse Sine of a Value

```
asin(0.5)
```

```
ans = 0.5236
```

Inverse Sine of a Vector of Complex Values

Find the inverse sine of the elements of vector `x`. The `asin` function acts on `x` element-wise.

```
x = [0.5i 1+3i -2.2+i];
y = asin(x)
```

```
y =
   0.0000 + 0.4812i   0.3076 + 1.8642i  -1.1091 + 1.5480i
```

Graph of the Inverse Sine Function

Graph the inverse sine over the domain $-1 \le x \le 1$.

```
x = -1:.01:1;
plot(x,asin(x))
grid on
```

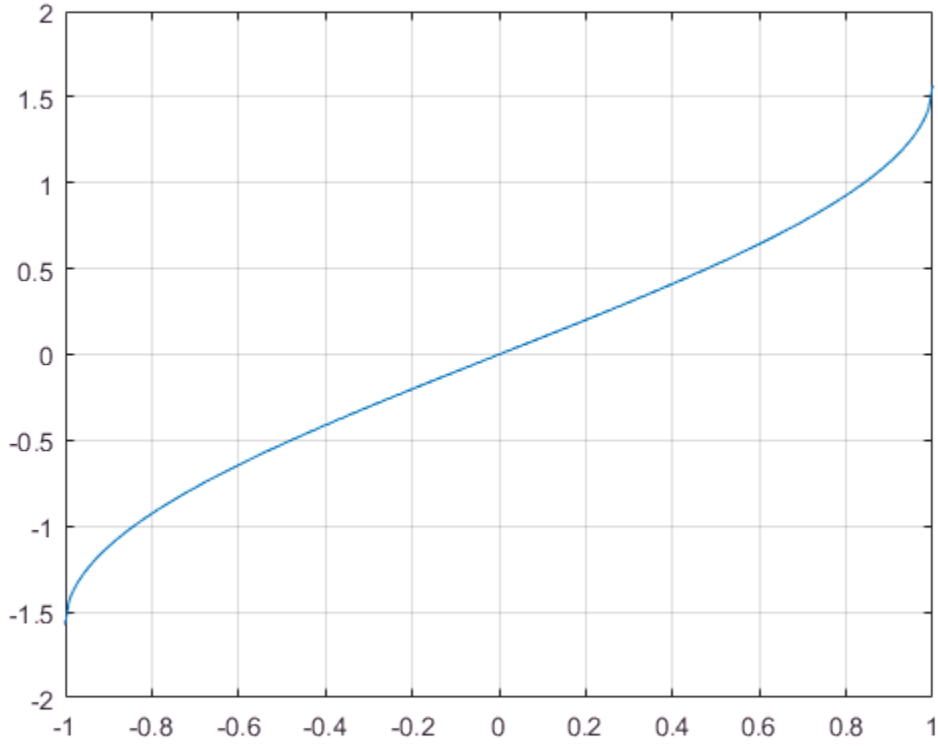

Definitions

Inverse Sine

The inverse sine is defined as

$$\sin^{-1}(z) = -i\log\left[iz + (1 - z^2)^{1/2}\right].$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generates an error during simulation and returns `NaN` in generated code when the input value `x` is real, but the output should be complex. To get the complex result, make the input value complex by passing in `complex(x)`.

See Also

`asind` | `sin` | `sind`

Introduced before R2006a

asind

Inverse sine in degrees

Syntax

```
Y = asind(X)
```

Description

`Y = asind(X)` returns the inverse sine ($\sin^{-1}$) of the elements of `X` in degrees. The function's domain and range include complex values. For real elements of `X` in the domain [-1,1], `asind` returns values in the range [-90,90]. For values of `X` outside this range, `asind` returns complex values.

Examples

Inverse Sine of Scalar

Show that the inverse sine of 1 is exactly 90°.

```
asind(1)
```

```
ans = 90
```

Round-Trip Calculation for Complex Angles

Show that the inverse sine, followed by sine, returns the original values of `X`.

```
sind(asind([2 3]))
```

```
ans =

    2.0000    3.0000
```

Graph of Inverse Sine Function

Plot the inverse sine function over the domain $-1 \le x \le 1$.

```
x = -1:.01:1;
plot(x,asind(x))
grid on
```

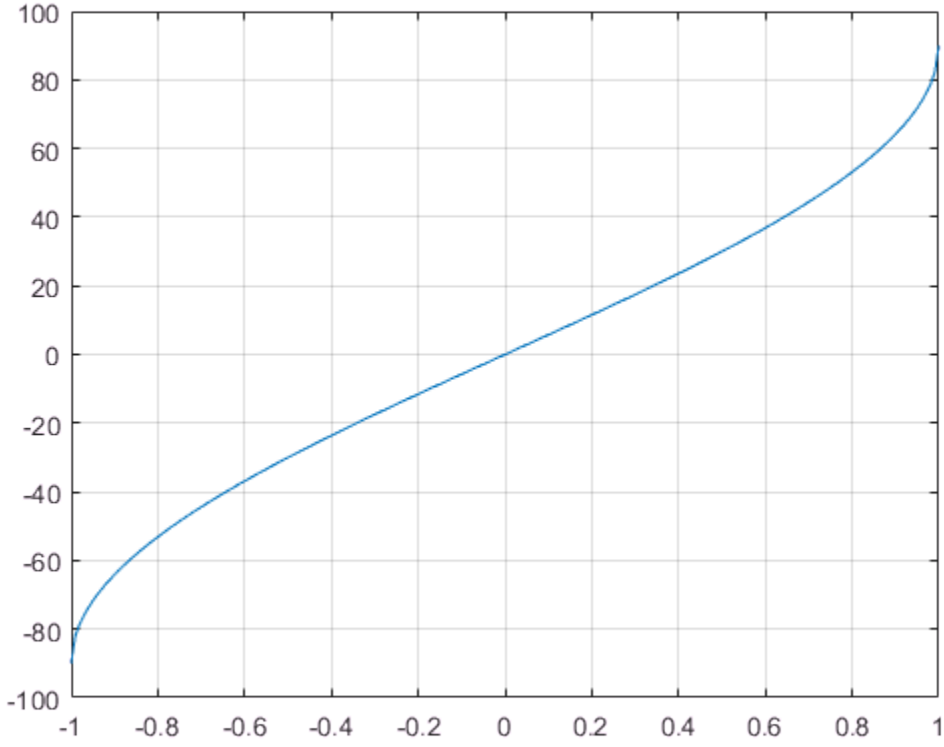

Input Arguments

X — Sine of angle

scalar value | vector | matrix | N-D array

Sine of angle, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `asind` operation is element-wise when `X` is nonscalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

`Y` — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`asin` | `sin` | `sind`

Introduced before R2006a

asinh

Inverse hyperbolic sine

Syntax

```
Y = asinh(X)
```

Description

`Y = asinh(X)` returns the inverse hyperbolic sine for each element of `X`.

The `asinh` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

Examples

Graph of Inverse Hyperbolic Sine Function

Graph the inverse hyperbolic sine over the domain $-5 \le x \le 5$.

```
x = -5:.01:5;
plot(x,asinh(x))
grid on
xlabel('x')
ylabel('y')
```

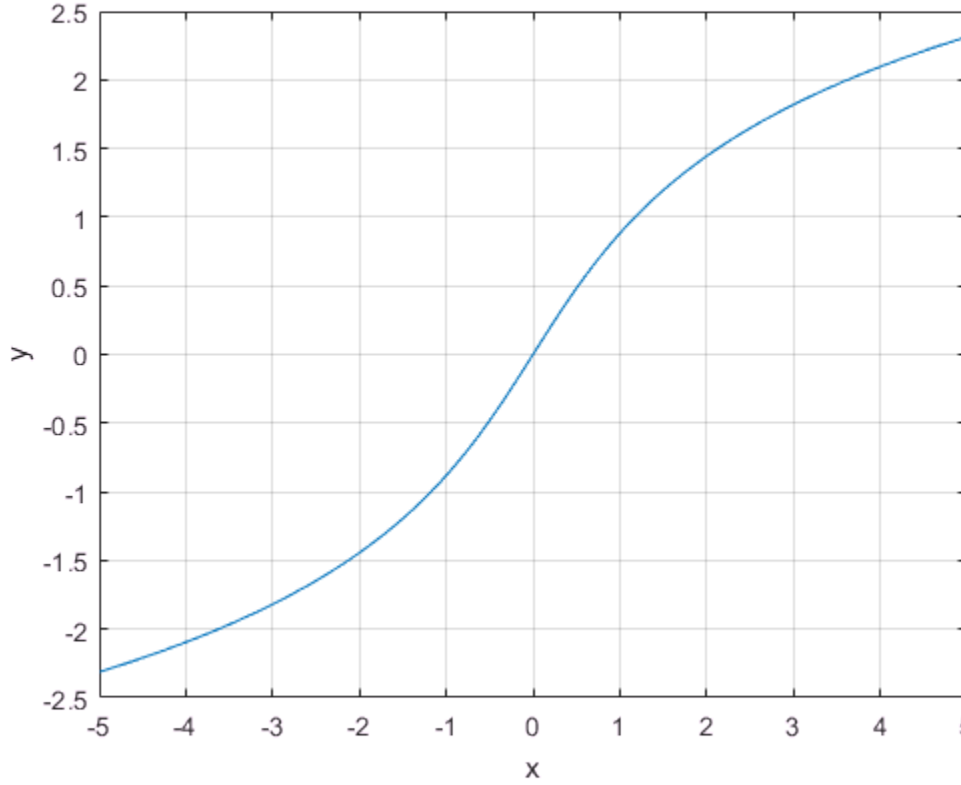

Definitions

Inverse Hyperbolic Sine

For real values x in the domain of all real numbers, the inverse hyperbolic sine satisfies

$$\sinh^{-1}(x) = \log\left(x + \sqrt{x^2 + 1}\right).$$

For complex numbers $z = x + iy$, the call `asinh(z)` returns complex results.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`asin` | `sinh` | `acosh`

Introduced before R2006a

assert

Throw error if condition false

Syntax

```
assert(cond)
```

```
assert(cond,msg)
assert(cond,msg,A1,...,An)
```

```
assert(cond,msgID,msg)
assert(cond,msgID,msg,A1,...,An)
```

Description

`assert(cond)` throws an error if `cond` is false.

`assert(cond,msg)` throws an error and displays the error message, `msg`, if `cond` is false.

`assert(cond,msg,A1,...,An)` displays an error message that contains formatting conversion characters, such as those used with the MATLAB `sprintf` function, if `cond` is false. Each conversion character in `msg` is converted to one of the values `A1,...,An`.

`assert(cond,msgID,msg)` throws an error, displays the error message, `msg`, and includes an error identifier on the exception, if `cond` is false. The identifier enables you to distinguish errors and to control what happens when MATLAB encounters the errors.

`assert(cond,msgID,msg,A1,...,An)` includes an error identifier on the exception and displays a formatted error message.

Examples

Value in Expected Range

Assert that the value, `x`, is greater than a specified minimum value.

```
minVal = 7;
x = 26;

assert(minVal < x)
```

The expression evaluates as true, and the assertion passes.

Assert that the value of `x` is between the specified minimum and maximum values.

```
maxVal = 13;

assert((minVal < x) && (x < maxVal))
```

```
Assertion failed.
```

The expression evaluates as false. The assertion fails and MATLAB throws an error.

Expected Data Type

Assert that the product of two numbers is a double-precision number.

```
a = 13;
b = single(42);
c = a*b;

assert(isa(c,'double'),'Product is not type double.')
```

```
Product is not type double.
```

Enhance the error message to display the data type of `c`.

```
assert(isa(c,'double'),'Product is type %s, not double.',class(c))
```

```
Product is type single, not double.
```

Expected Code Conditions

Use the `assert` function to test for conditions that should not happen in normal code execution. If the coefficients are numeric, the computed roots should be numeric. A quadratic equation using the specified coefficients and computed roots should be zero.

```
function x = quadraticSolver(C)

validateattributes(C,{'numeric'},{'size',[1 3]})
```

```
a = C(1);
b = C(2);
c = C(3);

x(1) = (-b+sqrt(b^2-4*a*c))/(2*a);
x(2) = (-b-sqrt(b^2-4*a*c))/(2*a);
assert(isnumeric(x),'quadraticSolver:nonnumericRoots',...
    'Computed roots are not numeric')

y1 = a*x(1)^2+b*x(1)+c;
y2 = a*x(2)^2+b*x(2)+c;
assert(y1 == 0,'quadraticSolver:root1Error','Error in first root')
assert(isequal(y2,0),'quadraticSolver:root2Error','Error in second root')

end
```

- "Capture Information About Exceptions"

Input Arguments

`cond` — Condition to assert

MATLAB expression

Condition to assert, specified as a valid MATLAB expression. If `cond` is false, the `assert` function throws an error. `cond` can include relational operators (such as `<` or `==`) and logical operators (such as `&&`, `||`, or `~`). Use the logical operators `and` and `or` to create compound expressions. MATLAB evaluates compound expressions from left to right, adhering to operator precedence rules.

Example: `a<0`

Example: `exist('myfunction.m','file')`

`msg` — Information about assertion failure

character vector

Information about the assertion failure, specified as a character vector. This message displays as the error message. To format the character vector, use escape sequences, such as `\t` or `\n`. You also can use any format specifiers supported by the `sprintf` function, such as `%s` or `%d`. Specify values for the conversion specifiers via the `A1,...,An` input arguments. For more information, see "Formatting Text".

Note: You must specify more than one input argument with `assert` if you want MATLAB to convert special characters (such as `\t`, `\n`, `%s`, and `%d`) in the error message.

Example: `'Assertion condition failed.'`

`A1,...,An` — Numeric or character arrays

scalar | vector | matrix | multidimensional array

Numeric or character arrays, specified as a scalar, vector, matrix, or multidimensional array. This input argument provides the values that correspond to and replace the conversion specifiers in `msg`.

`msgID` — Identifier for assertion failure

character vector

Identifier for the assertion failure, specified as a character vector. Use the message identifier to help identify the source of the error or to control a selected subset of the errors in your program.

The message identifier includes a `component` and `mnemonic`. The identifier must always contain a colon and follows this simple format: `component:mnemonic`. The `component` and `mnemonic` fields must each begin with a letter. The remaining characters can be alphanumerics (A–Z, a–z, 0–9) and underscores. No whitespace characters can appear anywhere in `msgID`. For more information, see “Message Identifiers”.

Example: `'MATLAB:singularMatrix'`

Example: `'MATLAB:narginchk:notEnoughInputs'`

Tips

- When you issue an error, MATLAB captures information about it and stores it in a data structure that is an object of the `MException` class. You can access information in the exception object by using `try/catch`. Or, if your program terminates because of an exception and returns control to the Command Prompt, you can use `MException.last`.
- If an assertion failure occurs within a `try` block, MATLAB does not cease execution of the program. In this case, MATLAB passes control to the `catch` block.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generates specified error messages at compile time only if all input arguments are constants or depend on constants. Otherwise, generates specified error messages at run time.
- If called with more than 1 argument, has no effect in standalone code even when run-time error detection is enabled. See "Run-Time Error Detection and Reporting in Standalone C/C++ Code" (MATLAB Coder).
- See "Rules for Using assert Function" (MATLAB Coder).

See Also

See Also

MException | `error`

Topics

"Capture Information About Exceptions"

Introduced in R2007a

assignin

Assign value to variable in specified workspace

Syntax

```
assignin(ws, 'var', val)
```

Description

`assignin(ws, 'var', val)` assigns the value `val` to the variable *`var`* in the workspace `ws`. The *`var`* input must be the array name only; it cannot contain array indices. If *`var`* does not exist in the specified workspace, `assignin` creates it. `ws` can have a value of `'base'` or `'caller'` to denote the MATLAB base workspace or the workspace of the caller function.

The `assignin` function is particularly useful for these tasks:

- Exporting data from a function to the MATLAB workspace
- Within a function, changing the value of a variable that is defined in the workspace of the caller function (such as a variable in the function argument list)

Examples

Example 1

This example creates a dialog box for the image display function, prompting a user for an image name and a colormap name. The `assignin` function is used to export the user-entered values to the MATLAB workspace variables `imfile` and `cmap`.

```
prompt = {'Enter image name:', 'Enter colormap name:'};
title = 'Image display - assignin example';
lines = 1;
def = {'my_image', 'hsv'};
answer = inputdlg(prompt, title, lines, def);
assignin('base', 'imfile', answer{1});
```

```
assignin('base', 'cmap', answer{2});
```



Example 2

`assignin` does not assign to specific elements of an array. The following statement generates an error:

```
X = 1:8;
assignin('base', 'X(3:5)', -1);
```

However, you can use the `evalin` function to do this:

```
evalin('base','X(3:5) = -1')
X =
     1     2    -1    -1    -1     6     7     8
```

Tips

The MATLAB base workspace is the workspace that is seen from the MATLAB command line (when not in the debugger). The caller workspace is the workspace of the function that called the currently running function. Note that the base and caller workspaces are equivalent in the context of a function that is invoked from the MATLAB command line. For more information, see “Base and Function Workspaces”.

See Also

`evalin`

Introduced before R2006a

atan

Inverse tangent in radians

Syntax

```
Y = atan(X)
```

Description

`Y = atan(X)` returns the "Inverse Tangent" on page 1-547 ($\tan^{-1}$) of the elements of `X`. The `atan` function operates element-wise on arrays. For real elements of `X`, `atan(X)` returns values in the interval `[-pi/2,pi/2]`. For complex values of `X`, `atan(X)` returns complex values. All angles are in radians.

Examples

Inverse Tangent of a Value

```
atan(0.8)
```

```
ans = 0.6747
```

Inverse Tangent of a Vector of Complex Values

Find the inverse tangent of the elements of vector `x`. The `atan` function acts on `x` element-wise.

```
x = [0.5i 1+3i -2.2+i];
Y = atan(x)
```

```
Y =
   0.0000 + 0.5493i   1.4615 + 0.3059i  -1.2019 + 0.1506i
```

Plot the Inverse Tangent Function

Plot the inverse tangent function over the interval $-20 \le x \le 20$.

```
x = -20:0.01:20;
plot(x,atan(x))
grid on
```

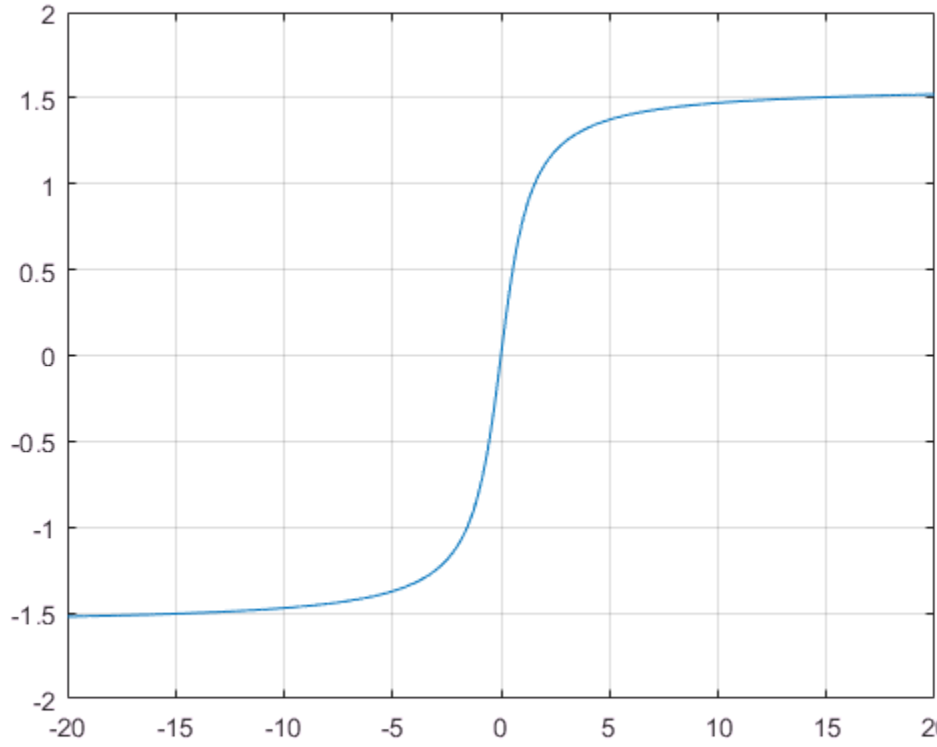

Input Arguments

X — Numeric input

number | vector | matrix | multidimensional array

Numeric input, specified as a number, vector, matrix, or multidimensional array.

Data Types: `single` | `double`

Complex Number Support: Yes

Definitions

Inverse Tangent

The inverse tangent is defined as

$$\tan^{-1}(z) = \frac{i}{2}\log\left(\frac{i+z}{i-z}\right).$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`atan2` | `atand` | `atanh` | `tan`

Introduced before R2006a

atan2

Four-quadrant inverse tangent

Syntax

```
P = atan2(Y,X)
```

Description

`P = atan2(Y,X)` returns the four-quadrant inverse tangent ($\tan^{-1}$) of `Y` and `X`, which must be real.

Examples

Find Four-Quadrant Inverse Tangent of a Point

Find the four-quadrant inverse tangent of the point `y = 4`, `x = -3`.

```
atan2(4,-3)
```

```
ans = 2.2143
```

Convert Complex Number to Polar Coordinates

Convert `4 + 3i` into polar coordinates.

```
z = 4 + 3i;
r = abs(z)
```

```
r = 5
```

```
theta = atan2(imag(z),real(z))
```

```
theta = 0.6435
```

The radius `r` and the angle `theta` are the polar coordinate representation of `4 + 3i`.

Alternatively, use `angle` to calculate `theta`.

```
theta = angle(z)
```

```
theta = 0.6435
```

Convert `r` and `theta` back into the original complex number.

```
z = r*exp(i*theta)
```

```
z =
   4.0000 + 3.0000i
```

Plot Four-Quadrant Inverse Tangent

Plot `atan2(Y,X)` for `-4<Y<4` and `-4<X<4`.

Define the interval to plot over.

```
[X,Y] = meshgrid(-4:0.1:4,-4:0.1:4);
```

Find `atan2(Y,X)` over the interval.

```
P = atan2(Y,X);
```

Use `surf` to generate a surface plot of the function. Note that `plot` plots the discontinuity that exists at `Y=0` for all `X<0`.

```
surf(X,Y,P);
view(45,45);
```

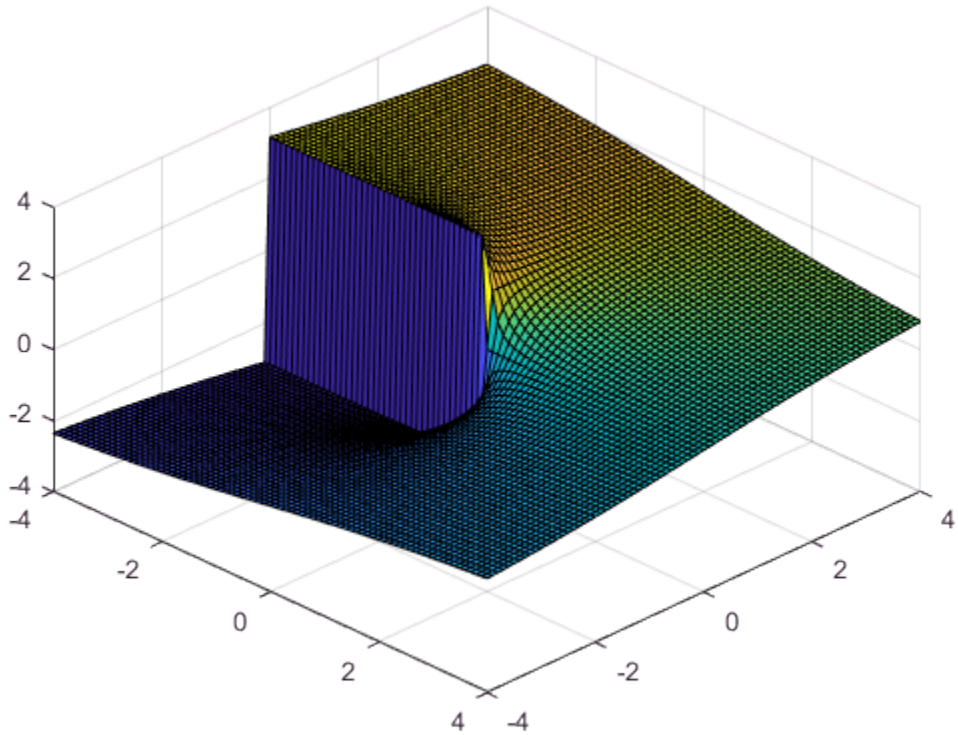

Input Arguments

Y — *y*-coordinates

scalar | vector | matrix | multidimensional array

y-coordinates, specified as a scalar, vector, matrix, or multidimensional array. Inputs Y and X must either be the same size or have sizes that are compatible (for example, Y is an M-by-N matrix and X is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double`

X — *x*-coordinates
scalar | vector | matrix | multidimensional array

x-coordinates, specified as a scalar, vector, matrix, or multidimensional array. Inputs `Y` and `X` must either be the same size or have sizes that are compatible (for example, `Y` is an `M`-by-`N` matrix and `X` is a scalar or `1`-by-`N` row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double`

Definitions

Four-Quadrant Inverse Tangent

The four-quadrant inverse tangent, `atan2(Y,X)`, returns values in the closed interval `[-pi,pi]` based on the values of `Y` and `X` as shown in the graphic.

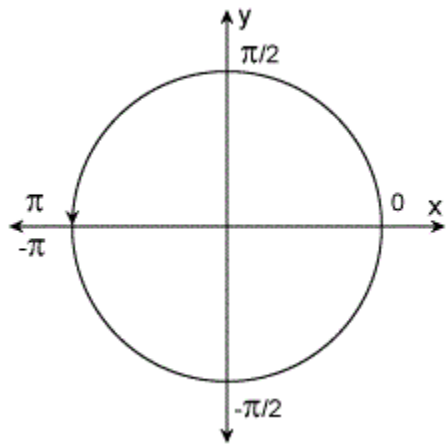

In contrast, `atan(Y/X)` returns results that are limited to the interval `[-pi/2,pi/2]`, shown on the right side of the diagram.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`angle` | `atan` | `atan2d` | `atanh` | `tan`

Introduced before R2006a

atan2d

Four-quadrant inverse tangent in degrees

Syntax

```
D = atan2d(Y,X)
```

Description

`D = atan2d(Y,X)` returns the four-quadrant inverse tangent ($\tan^{-1}$) of `Y` and `X`, which must be real. The result, `D`, is expressed in degrees.

Examples

Inverse Tangent of Four Points on the Unit Circle

```
x = [1 0 -1 0];
y = [0 1 0 -1];
d = atan2d(y,x)
```

```
d =

     0    90   180   -90
```

Input Arguments

Y — *y*-coordinates

scalar | vector | matrix | multidimensional array

y-coordinates, specified as a scalar, vector, matrix, or multidimensional array. Inputs `Y` and `X` must either be the same size or have sizes that are compatible (for example, `Y` is an `M`-by-`N` matrix and `X` is a scalar or `1`-by-`N` row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double`

`X` — *x*-coordinates
scalar | vector | matrix | multidimensional array

x-coordinates, specified as a scalar, vector, matrix, or multidimensional array. Inputs `Y` and `X` must either be the same size or have sizes that are compatible (for example, `Y` is an `M`-by-`N` matrix and `X` is a scalar or `1`-by-`N` row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double`

Definitions

Four-Quadrant Inverse Tangent

The four-quadrant inverse tangent, `atan2d(Y,X)`, returns values in the closed interval `[-180,180]` based on the values of `Y` and `X` as shown in the graphic.

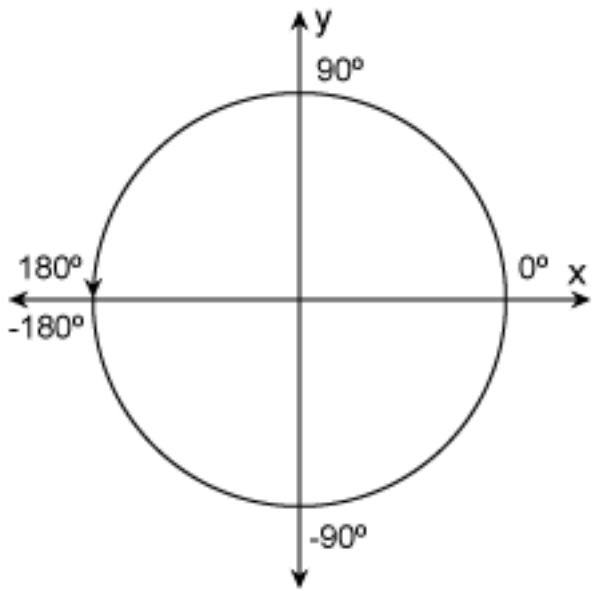

In contrast, `atand(Y/X)` returns results that are limited to the interval `[-90,90]`, shown on the right side of the diagram.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`atan` | `atan2` | `atand` | `tan` | `tand`

Introduced in R2012b

atand

Inverse tangent in degrees

Syntax

```
Y = atand(X)
```

Description

`Y = atand(X)` returns the inverse tangent ($\tan^{-1}$) of the elements of `X` in degrees. The function's domain and range include complex values. For real elements of `X` in the domain [-Inf, Inf], `atand` returns values in the range [-90, 90]. For complex values of `X`, `atand` returns complex values.

Examples

Inverse Tangent of Vector

```
x = [-50 -20 0 20 50];
y = atand(x)
```

```
y =

  -88.8542  -87.1376         0   87.1376   88.8542
```

The `atand` operation is element-wise when you pass a vector, matrix, or N-D array.

Inverse Tangent of Complex Value

```
atand(10+i)
```

```
ans =
  84.3450 + 0.5618i
```

Input Arguments

X — Tangent of angle

scalar value | vector | matrix | N-D array

Tangent of angle, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `atand` operation is element-wise when `X` is non-scalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`atan` | `atan2d` | `tan` | `tand`

Introduced before R2006a

atanh

Inverse hyperbolic tangent

Syntax

```
Y = atanh(X)
```

Description

The `atanh` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

`Y = atanh(X)` returns the inverse hyperbolic tangent for each element of `X`.

Examples

Graph of Inverse Hyperbolic Tangent Function

Graph the inverse hyperbolic tangent over the domain $-1 < x < 1$.

```
x = -0.99:0.01:0.99;
plot(x,atanh(x))
grid on
xlabel('x')
ylabel('y')
```

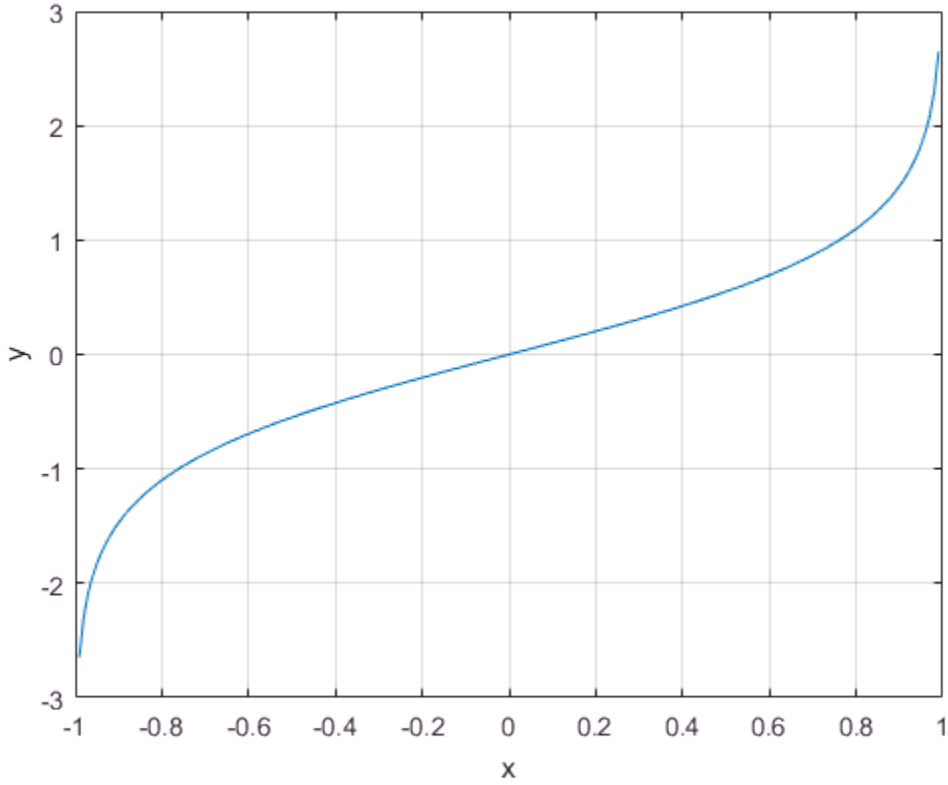

Definitions

Inverse Hyperbolic Tangent

For real values x in the domain $-1 < x < 1$, the inverse hyperbolic tangent satisfies

$$\tanh^{-1}(x) = \frac{1}{2}\log\left(\frac{1+x}{1-x}\right).$$

For complex numbers $z = x + iy$ as well as real values in the regions $-\infty < z < -1$ and $1 < z < \infty$, the call `atanh(z)` returns complex results.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generates an error during simulation and returns `NaN` in generated code when the input value `x` is real, but the output should be complex. To get the complex result, make the input value complex by passing in `complex(x)`.

See Also

`atan2` | `atan` | `tanh` | `asinh` | `acosh` | `tan`

Introduced before R2006a

audiodevinfo

Information about audio device

Syntax

```
info = audiodevinfo
nDevices = audiodevinfo(IO)
name = audiodevinfo(IO,ID)
DriverVersion = audiodevinfo(IO,ID,'DriverVersion')
support = audiodevinfo(IO,ID,Fs,nBits,nChannels)

ID = audiodevinfo(IO,name)
ID = audiodevinfo(IO,Fs,nBits,nChannels)
```

Description

`info = audiodevinfo` returns information about the input and output audio devices on the system.

`nDevices = audiodevinfo(IO)` returns the number of input devices on the system if `IO` is `1`, and returns the number of output devices on the system if `IO` is `0`.

`name = audiodevinfo(IO,ID)` returns the name of the audio device specified by the device identifier, `ID`.

`DriverVersion = audiodevinfo(IO,ID,'DriverVersion')` returns the name of the driver for the audio device specified by `ID`.

`support = audiodevinfo(IO,ID,Fs,nBits,nChannels)` returns `1` if the input or output audio device specified by `ID` supports the sample rate, number of bits, and number of channels specified by the values of `Fs`, `nBits`, and `nChannels`, respectively. Otherwise, `support` is `0`.

`ID = audiodevinfo(IO,name)` returns the device identifier of the input or output audio device identified by the device name, `name`. If no device is found with the specified name, then `audiodevinfo` returns an error.

`ID = audiodevinfo(IO,Fs,nBits,nChannels)` returns the device identifier of the first input or output device that supports the sample rate, number of bits, and the number of channels specified by the values of `Fs`, `nBits`, and `nChannels`, respectively. If no supporting device is found, then `ID` is `-1`.

Examples

View Information About Audio Devices

Call `audiodevinfo` with no inputs to view information about the input and output audio devices on a system. `audiodevinfo` returns a structure containing two fields, `input` and `output`.

```
info = audiodevinfo
```

```
info =

  struct with fields:

     input: [1×2 struct]
    output: [1×4 struct]
```

The input field contains audio device names, driver used, and device identifiers.

```
info.input
```

```
ans =

  1×2 struct array with fields:

    Name
    DriverVersion
    ID
```

Display the information on the first input device.

```
info.input(1)
```

```
ans =

  struct with fields:

             Name: 'Primary Sound Capture Driver  Windows DirectSound '
    DriverVersion: 'Windows DirectSound'
               ID: 0
```

Display the information on the second input device.

```
info.input(2)
```

```
ans =

  struct with fields:

             Name: 'HP 4120 Microphone  HP 4120   Windows DirectSound '
    DriverVersion: 'Windows DirectSound'
               ID: 1
```

The values on your system might differ from this example.

View Number of Output Devices

View the number of output audio devices on the system, using an IO value of 0 to indicate output.

```
nDevices = audiodevinfo(0)
```

```
nDevices =

     4
```

This example shows three output devices, but your system might vary.

Check Support for Input Device

Check if the input audio device identified by the `ID` value, `0`, supports a sample rate of `44100` hertz, with `16` bits per sample, and two channels.

```
support = audiodevinfo(1,0,44100,16,2)
```

```
support =

  logical

   1
```

The input device supports the specified sample rate, number of bits and number of channels. Note that results on your system might vary.

Input Arguments

`IO` — Input or output device
`1` | `0`

Input or output device, specified as `1` to indicate input, or `0` to indicate output.

`ID` — Audio device identifier
integer

Audio device identifier, specified as an integer. The device can be an input or output audio device.

`Fs` — Sample rate
scalar

Sample rate, in hertz, specified as a positive scalar.

Example: `44100`

Data Types: `single` | `double`

`nBits` — Number of bits per sample
scalar

Number of bits per sample, specified as a scalar.

Example: `16`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nChannels` — Number of audio channels

1 | 2

Number of audio channels, specified as 1 (mono) or 2 (stereo).

`name` — Name of input or output device

character vector

Name of the input or output audio device, specified as a character vector.

Data Types: `char`

Output Arguments

`info` — Information about audio devices

structure array

Information about audio devices, returned as a structure array containing two fields, `input` and `output`. Each field is an array of structures, with each structure containing information about one of the audio input or output devices on the system. The individual device structure fields are:

- `Name` — Name of the device, returned as a character vector.
- `DriverVersion` — Name of the driver used to communicate with the device, returned as a character vector.
- `ID` — Device identifier, returned as a scalar.

See Also

See Also

`audioplayer` | `audiorecorder`

Introduced before R2006a

audioplayer

Create object for playing audio

Syntax

```
player = audioplayer(Y,Fs)
player = audioplayer(Y,Fs,nBits)
player = audioplayer(Y,Fs,nBits,ID)
player = audioplayer(recorder)
player = audioplayer(recorder,ID)
```

Description

`player = audioplayer(Y,Fs)` creates an `audioplayer` object for signal `Y`, using sample rate `Fs`. The function returns a handle to the `audioplayer` object, `player`.

`player = audioplayer(Y,Fs,nBits)` uses `nBits` bits per sample for signal `Y`.

`player = audioplayer(Y,Fs,nBits,ID)` uses the audio device identified by `ID` for output.

`player = audioplayer(recorder)` creates an `audioplayer` object using audio recorder object `recorder`.

`player = audioplayer(recorder,ID)` creates an object from `recorder` that uses the audio device identified by`ID` for output.

Input Arguments

Y

Audio signal represented by a vector or two-dimensional array containing `single`, `double`, `int8`, `uint8`, or `int16` values.

The value range of the input sample depends on the data type. The following table lists these ranges.

Data Type	Sample Value Range
`int8`	-128 to 127
`uint8`	0 to 255
`int16`	-32768 to 32767
`single`	-1 to 1
`double`	-1 to 1

`Fs`

Sampling rate in Hz. Valid values depend on both the sample rates permitted by MATLAB and the specific audio hardware on your system. MATLAB has a hard restriction of 1000 Hz <= Fs <= 384000 Hz, although further hardware-dependent restrictions apply. Typical values supported by most sound cards are 8000, 11025, 22050, 44100, 48000, and 96000 Hz.

`nBits`

Bits per sample. Specify only when signal `Y` is represented by floating-point values. Valid values depend on the audio hardware installed: `8`, `16`, or `24`.

Default: `16`

`ID`

Device identifier. To obtain the ID of a device, use the `audiodevinfo` function.

Default: `-1` (default device)

`recorder`

Audio recorder object created by `audiorecorder`.

Methods

Note: When calling any method, include the `audioplayer` object name using function syntax, such as `stop(player)`.

get	Query properties of `audioplayer` object.
`isplaying`	Query whether playback is in progress: returns `true` or `false`.
`pause`	Pause playback.
play	Play audio from beginning to end.
playblocking	Play, and do not return control until playback completes.
`resume`	Restart playback from paused position.
set	Set properties of `audioplayer` object.
`stop`	Stop playback.

See the reference pages for get, play, playblocking, and set for additional syntax options.

Properties

`BitsPerSample`	Number of bits per sample. (Read-only)
`CurrentSample`	Current sample that the audio output device is playing. If the device is not playing, `CurrentSample` is the next sample to play with `play` or `resume`. (Read-only)
`DeviceID`	Identifier for audio device. (Read-only)
`NumberOfChannels`	Number of audio channels. (Read-only)
`Running`	Status of the audio player: `'on'` or `'off'`. (Read-only)
`SampleRate`	Sampling frequency in Hz.
`TotalSamples`	Total length of the audio data in samples. (Read-only)
`Tag`	Label of the object.
`Type`	Name of the class: `'audioplayer'`. (Read-only)
`UserData`	Any type of additional data to store with the object.

The following four properties apply to callback functions. The first two inputs to your callback function must be the `audioplayer` object and an *`event`* structure.

`StartFcn`	Function to execute one time when playback starts.
`StopFcn`	Function to execute one time when playback stops.

`TimerFcn`	Function to execute repeatedly during playback. To specify time intervals for the repetitions, use the `TimerPeriod` property.
`TimerPeriod`	Time in seconds between `TimerFcn` callbacks. Default: `.05`

Examples

Load and play a sample audio file of Handel's “Hallelujah Chorus:”

```
load handel;
player = audioplayer(y, Fs);
play(player);
```

See Also

`audiodevinfo` | `sound` | `audiorecorder`

Topics

“Characteristics of Audio Files”
“Play Audio”

Introduced before R2006a

audiorecorder

Create object for recording audio

Syntax

```
recorder = audiorecorder
recorder = audiorecorder(Fs,nBits,nChannels)
recorder = audiorecorder(Fs,nBits,nChannels,ID)
```

Description

`recorder = audiorecorder` creates an 8000 Hz, 8-bit, 1-channel `audiorecorder` object.

`recorder = audiorecorder(Fs,nBits,nChannels)` sets the sample rate `Fs` (in Hz), the sample size `nBits`, and the number of channels `nChannels`.

`recorder = audiorecorder(Fs,nBits,nChannels,ID)` sets the audio input device to the device specified by `ID`.

Input Arguments

`Fs`

Sampling rate in Hz. Valid values depend on both the sample rates permitted by MATLAB and the specific audio hardware on your system. MATLAB has a hard restriction of 1000 Hz <= Fs <= 384000 Hz, although further hardware-dependent restrictions apply. Typical values supported by most sound cards are 8000, 11025, 22050, 44100, 48000, and 96000 Hz.

Default: 8000

`nBits`

Bits per sample. Valid values depend on the audio hardware installed: `8`, `16`, or `24`.

Default: 8

`nChannels`

The number of channels: `1` (mono) or `2` (stereo).

Default: 1

`ID`

Device identifier. To obtain the ID of a device, use the `audiodevinfo` function.

Default: `-1` (default device)

Methods

Note: When calling any method, include the `audiorecorder` object name using function syntax, such as `stop(recorder)`.

get	Query properties of `audiorecorder` object.
getaudiodata	Create an array that stores the recorded signal values.
`getplayer`	Create an `audioplayer` object.
`isrecording`	Query whether recording is in progress: returns `true` or `false`.
`pause`	Pause recording.
play	Play recorded audio. This method returns an `audioplayer` object.
record	Start recording.
recordblocking	Record, and do not return control until recording completes. This method requires a second input for the length of the recording in seconds: `recordblocking(recorder,length)`
`resume`	Restart recording from paused position.
set	Set properties of `audiorecorder` object.

`stop`	Stop recording.

See the reference pages for get, getaudiodata, play, record, recordblocking, and set for additional syntax options.

Properties

`BitsPerSample`	Number of bits per sample. (Read-only)
`CurrentSample`	Current sample that the audio input device is recording. If the device is not recording, `CurrentSample` is the next sample to record with `record` or `resume`. (Read-only)
`DeviceID`	Identifier for audio device. (Read-only)
`NumberOfChannels`	Number of audio channels. (Read-only)
`Running`	Status of the audio recorder: `'on'` or `'off'`. (Read-only)
`SampleRate`	Sampling frequency in Hz. (Read-only)
`TotalSamples`	Total length of the audio data in samples. (Read-only)
`Tag`	Label of the object.
`Type`	Name of the class: `'audiorecorder'`. (Read-only)
`UserData`	Any type of additional data to store with the object.

The following four properties apply to callback functions. The first two inputs to your callback function must be the `audiorecorder` object and an *`event`* structure.

`StartFcn`	Function to execute one time when recording starts.
`StopFcn`	Function to execute one time when recording stops.
`TimerFcn`	Function to execute repeatedly during recording. To specify time intervals for the repetitions, use the `TimerPeriod` property.
`TimerPeriod`	Time in seconds between `TimerFcn` callbacks. Default: `.05`

`audiorecorder` ignores any specified values for these properties, which will be removed in a future release.

`BufferLength`	Length of buffer in seconds.
`NumberOfBuffers`	Number of buffers.

Examples

Create an `audiorecorder` object for CD-quality audio in stereo, and view its properties:

```
recObj = audiorecorder(44100, 16, 2);
get(recObj)
```

Collect a sample of your speech with a microphone, and plot the signal data:

```
% Record your voice for 5 seconds.
recObj = audiorecorder;
disp('Start speaking.')
recordblocking(recObj, 5);
disp('End of Recording.');

% Play back the recording.
play(recObj);

% Store data in double-precision array.
myRecording = getaudiodata(recObj);

% Plot the waveform.
plot(myRecording);
```

Tips

- To use an `audiorecorder` object, your system must have a properly installed and configured sound card.
- `audiorecorder` is not intended for long, high-sample-rate recording. `audiorecorder` uses system memory for storage and does not use disk buffering. When you attempt a large recording, your MATLAB performance sometimes degrades over time.

See Also

`audiodevinfo` | `sound` | `audioplayer`

Topics

"Characteristics of Audio Files"

"Record Audio"
"Record or Play Audio within a Function"

Introduced before R2006a

aviinfo

Information about Audio/Video Interleaved (AVI) file

Note: `aviinfo` will be removed in a future release. Use `VideoReader` instead.

Syntax

```
fileinfo = aviinfo(filename)
```

Description

`fileinfo` `= aviinfo(`*`filename`*`)` returns a structure whose fields contain information about the AVI file specified in the character vector *`filename`*. If *`filename`* does not include an extension, then `.avi` is used. The file must be in the current working directory or in a directory on the MATLAB path.

The set of fields in the *`fileinfo`* structure is shown below.

Field Name	Description
`AudioFormat`	Character vector containing the name of the format used to store the audio data, if audio data is present
`AudioRate`	Integer indicating the sample rate in Hertz of the audio stream, if audio data is present
`Filename`	Character vector specifying the name of the file
`FileModDate`	Character vector containing the modification date of the file
`FileSize`	Integer indicating the size of the file in bytes
`FramesPerSecond`	Integer indicating the desired frames per second
`Height`	Integer indicating the height of the AVI movie in pixels

Field Name	Description
`ImageType`	Character vector indicating the type of image. Either `'truecolor'` for a truecolor (RGB) image, or `'indexed'` for an indexed image.
`NumAudioChannels`	Integer indicating the number of channels in the audio stream, if audio data is present
`NumFrames`	Integer indicating the total number of frames in the movie
`NumColormapEntries`	Integer specifying the number of colormap entries. For a truecolor image, this value is 0 (zero).
`Quality`	Number between 0 and 100 indicating the video quality in the AVI file. Higher quality numbers indicate higher video quality; lower quality numbers indicate lower video quality. This value is not always set in AVI files and therefore can be inaccurate.
`VideoCompression`	Character vector containing the compressor used to compress the AVI file. If the compressor is not Microsoft Video 1, Run Length Encoding (RLE), Cinepak, or Intel® Indeo, `aviinfo` returns the four-character code that identifies the compressor.
`Width`	Integer indicating the width of the AVI movie in pixels

See Also

See Also

`mmfileinfo` | `VideoReader` | `VideoWriter`

Introduced before R2006a

axes

Create Cartesian axes

Syntax

```
axes
axes(Name,Value)
axes(parent,Name,Value)
ax = axes( ___ )

axes(cax)
```

Description

`axes` creates the default Cartesian axes in the current figure and makes it the current axes. Typically, you do not need to create axes before plotting since graphics functions automatically create axes when plotting if they do not exist.

`axes(Name,Value)` modifies the axes appearance or controls the way data displays using one or more name-value pair arguments. For example, `'FontSize',14` sets the font size for the axes text. For a list of properties, see Axes Properties.

`axes(parent,Name,Value)` creates the axes in the figure, uipanel, or uitab specified by `parent`, instead of in the current figure.

`ax = axes( ___ )` returns the `Axes` object created. Use `ax` to query and modify properties of the `Axes` object after it is created. For a list of properties, see Axes Properties.

`axes(cax)` makes the axes or chart specified by `cax` the current axes and brings the parent figure into focus. This command also makes `cax` the first object listed in the `Children` property of the figure and sets the `CurrentAxes` property of the figure to `cax`.

Examples

Position Multiple Axes in Figure

Position two `Axes` objects in a figure and add a plot to each one.

Specify the position of the first `Axes` object so that it has a lower left corner at the point (0.1 0.1) with a width and height of 0.7. Specify the position of the second `Axes` object so that it has a lower left corner at the point (0.65 0.65) with a width and height of 0.28. By default, the values are normalized to the figure. Return the `Axes` objects as `ax1` and `ax2`.

```
figure
ax1 = axes('Position',[0.1 0.1 0.7 0.7]);
ax2 = axes('Position',[0.65 0.65 0.28 0.28]);
```

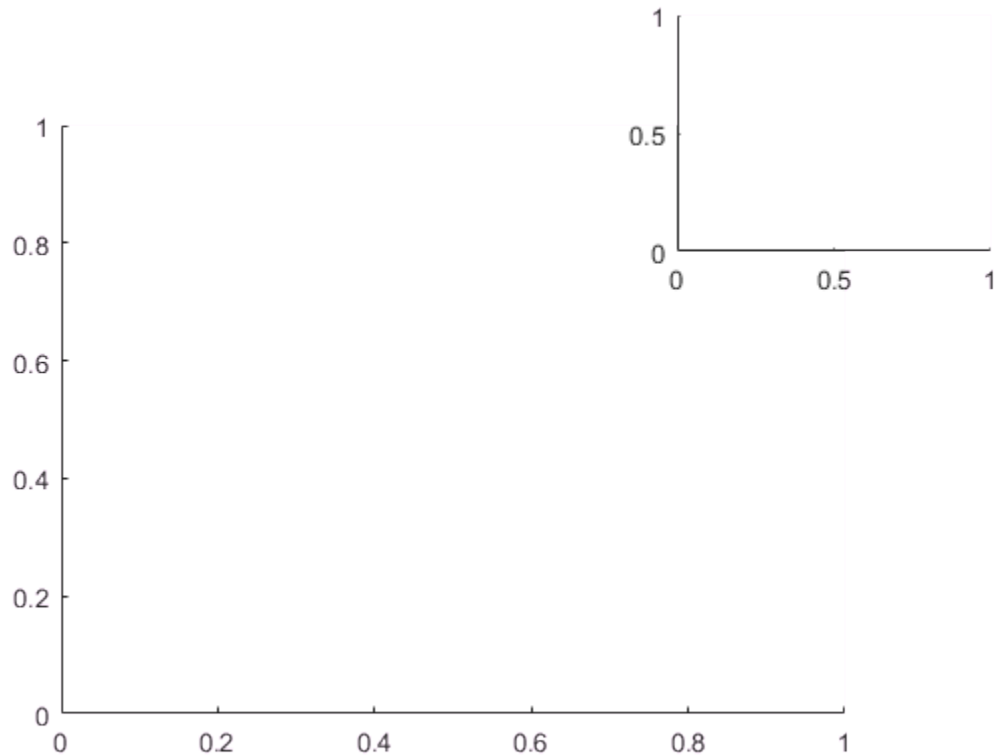

Add a plot to each `Axes` object. Specify the axes by passing it as the first input argument to the graphics function. Most graphics functions reset some axes properties, such as the tick values and labels. However, they do not reset the axes position.

```
contour(ax1,peaks(20))
surf(ax2,peaks(20))
```

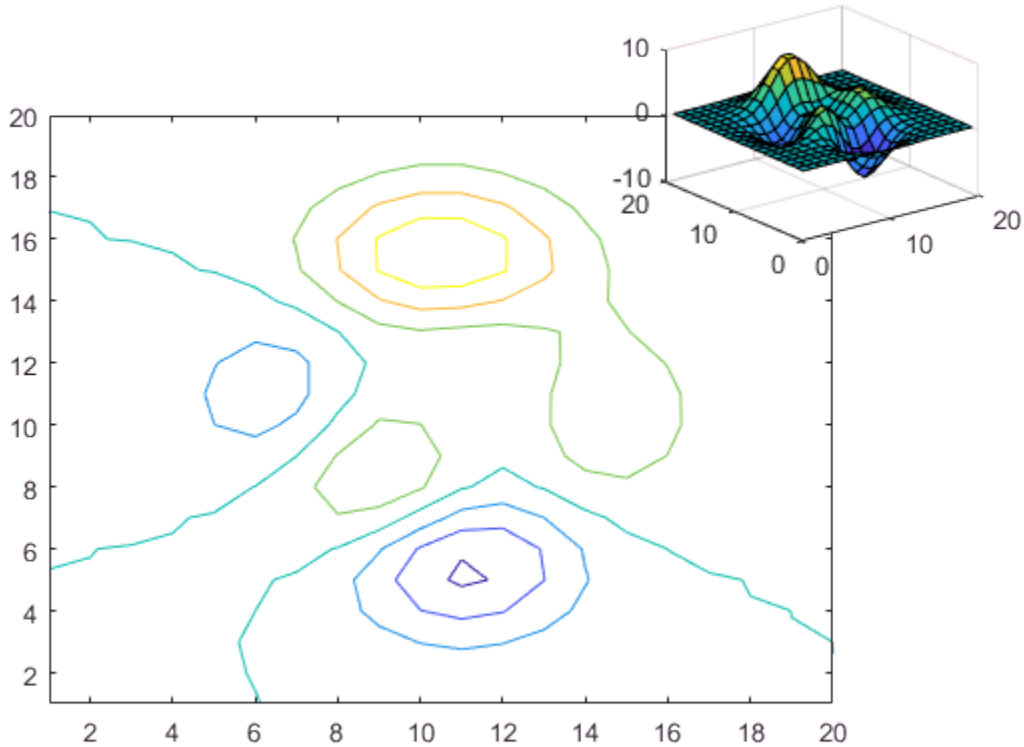

Make Axes the Current Axes

Create two overlayed `Axes` objects. Then, specify the current axes and add a plot.

First create two `Axes` objects and specify the positions. Display the box outline around each axes. Return the `Axes` objects as `ax1` and `ax2`.

```
figure
ax1 = axes('Position',[0.1 0.1 .6 .6],'Box','on');
ax2 = axes('Position',[.35 .35 .6 .6],'Box','on');
```

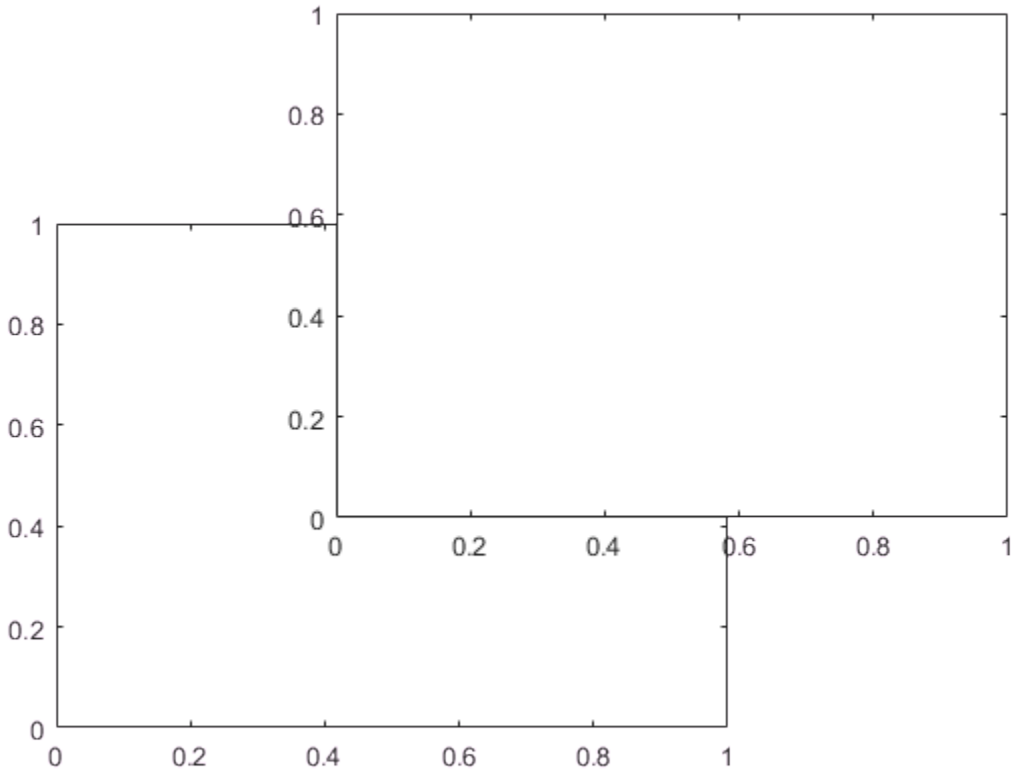

Make `ax1` the current axes. This action brings the axes to the front of the display and makes it the target for subsequent graphics functions. Add a line plot to the axes.

```
axes(ax1)
x = linspace(0,10);
y = sin(x);
plot(x,y)
```

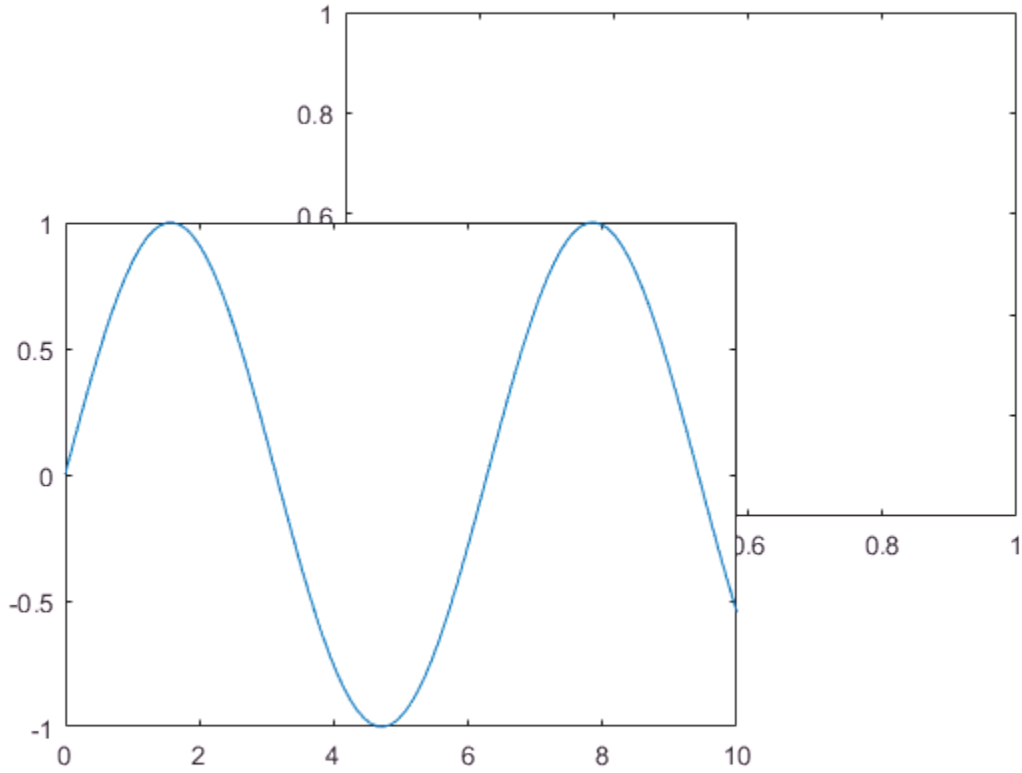

Create Axes in UITabs

Create a figure with two tabs. Add axes to each tab by specifying the parent container for each one. Plot a line in the first tab and a surface in the second tab.

```
figure
tab1 = uitab('Title','Tab1');
ax1 = axes(tab1);
plot(ax1,1:10)

tab2 = uitab('Title','Tab2');
ax2 = axes(tab2);
```

```
surf(ax2,peaks)
```

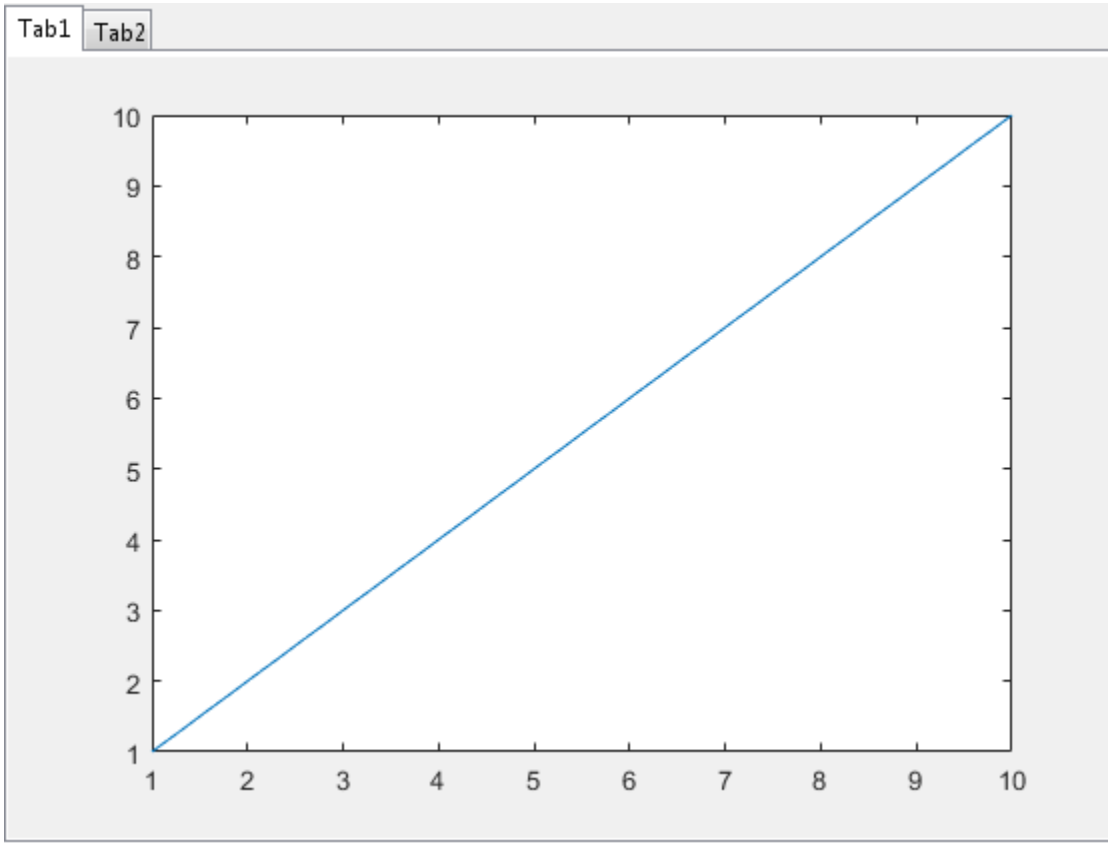

- "Control Ratio of Axis Lengths and Data Unit Lengths"
- "Control Axes Layout"

Input Arguments

`parent` — Parent container
figure object | uipanel object | uitab object

Parent container, specified as a figure, uipanel, or uitab object.

`cax` — Axes to make current
`Axes` object | `PolarAxes` object | graphics object

Axes to make current, specified as an `Axes` object, a `PolarAxes` object, or a graphics object such as a `HeatmapChart`.

If you want to make an object the current axes without changing the state of the figure, set the `CurrentAxes` property of the figure containing the axes; for example:

```
fig = gcf;
fig.CurrentAxes = cax;
```

This approach is useful if you want a figure to remain minimized or stacked below other figures, but want to specify the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments as `Name1,Value1,...,NameN,ValueN`.

Example: `axes('Position',[.3 .3 .5 .5])` sets the position.

Some graphics functions change axes property values when plotting, such as the axis limits or tick values. Set axes properties after plotting.

Note: The properties listed here are only a subset. For a full list, see Axes Properties.

`'Position'` — Size and location, excluding margin for labels
`[0.1300 0.1100 0.7750 0.8150]` (default) | four-element vector of form `[left bottom width height]`

Size and location, excluding a margin for the labels, specified as a four-element vector of the form `[left bottom width height]`.

- The `left` and `bottom` elements define the distance from the lower left corner of the container (typically a figure, uipanel, or uitab) to the lower left corner of the position boundary.

- The `width` and `height` elements are the position boundary dimensions.

By default, the values are measured in units normalized to the container. To change the units, set the `Units` property.

The red rectangle shows the region defined by the `Position` property. The region does not include the tick labels, axis labels, or title. For axes in a 3-D view, the `Position` property is the smallest rectangle that encloses the axes.

2-D View of Axes	3-D View of Axes
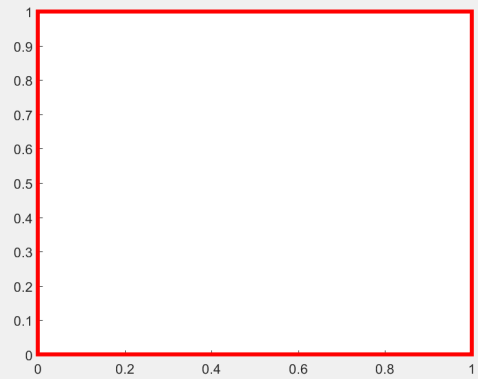	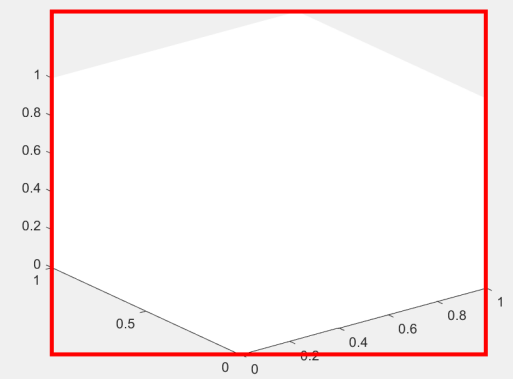

If you want to specify the position and account for the text around the axes, then set the `OuterPosition` property instead. The `ActivePositionProperty` determines whether to base the axes size on the `Position` or `OuterPosition` property values. Other axes properties that affect the size and shape include the DataAspectRatio, PlotBoxAspectRatio, and CameraViewAngle properties. The actual axes size is the largest possible size that conforms to all the position-related properties without extending outside the position boundary.

For more information on the axes position, see “Control Axes Layout”.

`'OuterPosition'` — Size and location, including labels and margin

`[0 0 1 1]` (default) | four-element vector of the form `[left bottom width height]`

Size and location, including the labels and a margin, specified as a four-element vector of the form `[left bottom width height]`. The default value of `[0 0 1 1]` includes the whole interior of the container.

- The `left` and `bottom` elements define the distance from the lower left corner of the container (typically a figure, uipanel, or uitab) to the lower left corner of the outer position boundary.
- The `width` and `height` elements are the outer position boundary dimensions.

By default, the values are measured in units normalized to the container. To change the units, set the `Units` property.

The red rectangle shows the region defined by the `OuterPosition` property. The illustrations show an outer position value of `[0.1 0.1 0.8 0.8]`.

2-D View of Axes	3-D View of Axes
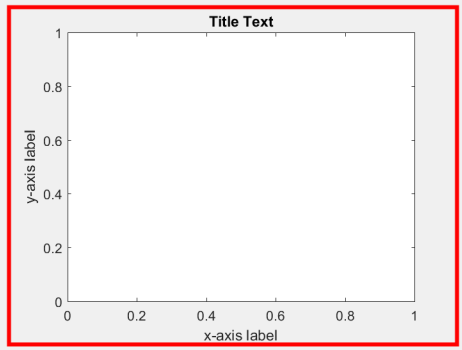	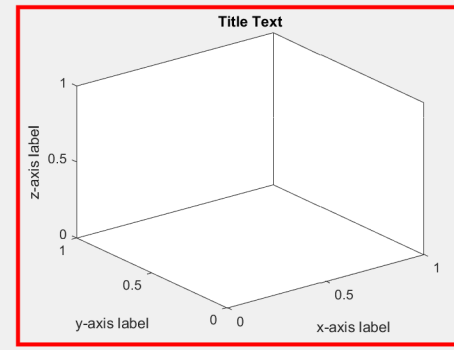

For more information on the axes position, see “Control Axes Layout”.

`'Units'` — Position units

`'normalized'` (default) | `'inches'` | `'centimeters'` | `'points'` | `'pixels'` | `'characters'`

Position units, specified as one of the values in this table.

Units	Description
`'normalized'` (default)	Normalized with respect to the container, which is typically the figure or a uipanel. The lower left corner of the container maps to `(0,0)` and the upper right corner maps to `(1,1)`.

Units	Description
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default uicontrol font of the graphics root object: • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Typography points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

When specifying the units as a `Name,Value` pair during object creation, you must set the `Units` property before specifying the properties that you want to use these units, such as `Position`.

Definitions

Current Axes

The current axes is the target for graphics output. By default, graphics functions such as `plot`, `text`, and `surf` draw their results in the current axes. The current axes object is typically the last `Axes` object created or the last one you clicked with the mouse.

Changing the current figure also changes the current axes. The `gca` command returns the current axes.

See Also

See Also

Properties

Axes Properties

Functions

`axis` | `cla` | `clf` | `figure` | `gca` | `polaraxes` | `subplot`

Topics

"Control Ratio of Axis Lengths and Data Unit Lengths"
"Control Axes Layout"

Introduced before R2006a

Axes Properties

Control axes appearance and behavior

Description

`Axes` properties control the appearance and behavior of an `Axes` object. By changing property values, you can modify certain aspects of the axes.

Starting in R2014b, you can use dot notation to query and set properties.

```
ax = gca;
c = ax.Color;
ax.Color = 'blue';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Color` — Color of axes back planes

`[1 1 1]` (default) | RGB triplet | character vector | `'none'`

Color of axes back planes, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the axes is invisible and the figure color shows through.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`

Long Name	Short Name	RGB Triplet
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `ax.Color = [0 0 1]`

Example: `ax.Color = 'b'`

Example: `ax.Color = 'blue'`

`Box` — Axes box outline

`'off'` (default) | `'on'`

Axes box outline, specified as one of these values:

- `'off'` — Do not display the box outline around the axes.
- `'on'` — Display the box outline around the axes. In a 3-D view, the outline appears around the axes back planes. Use the `BoxStyle` property to change the extent of the outline.

The `XColor`, `YColor`, and `ZColor` properties control the color of the outline.

Example: `ax.Box = 'on'`

`BoxStyle` — Style of axes box outline

`'back'` (default) | `'full'`

Style of axes box outline, specified as one of these values:

- `'back'` — Outline the back planes of the 3-D box.
- `'full'` — Outline the entire 3-D box.

The `BoxStyle` property affects only 3-D views.

Example: `ax.BoxStyle = 'full'`

`LineWidth` — Width of axes outline, tick marks, and grid lines

`0.5` (default) | scalar value

Width of axes outline, tick marks, and grid lines, specified as a scalar value in point units. One point equals 1/72 inch.

Example: `ax.LineWidth = 1.5`

Individual Axis Appearance and Scale

`XAxis`, `YAxis`, `ZAxis` — Component that controls appearance and behavior of each axis

`NumericRuler` object | `DatetimeRuler` object | `DurationRuler` object | `CategoricalRuler` object

Component that controls the appearance and behavior of the *x*-axis, *y*-axis, or *z*-axis, returned as a `NumericRuler`, `DatetimeRuler`, `DurationRuler`, or `CategoricalRuler` object. The type of ruler that MATLAB creates for each axis depends on the plotted data.

Modify the appearance and behavior of a particular axis by accessing the associated ruler and setting ruler properties. For a list of options, see:

- NumericRuler Properties
- DatetimeRuler Properties
- DurationRuler Properties
- CategoricalRuler Properties

For example, access the ruler for the *x*-axis through the `XAxis` property. Then, change the `Color` property of the ruler, and thus the color of the *x*-axis, to red. Similarly, change the color of the *y*-axis to green.

```
ax = gca;
ax.XAxis.Color = 'r';
ax.YAxis.Color = 'g';
```

Use the `XAxis`, `YAxis`, and `ZAxis` properties to access the ruler objects and set ruler properties. If you want to set axes properties, set them directly on the `Axes` object. For example, `ax.XAxisLocation = 'top'` sets the `XAxisLocation` property of the `Axes` object.

`XAxisLocation` — Location of x-axis

`'bottom'` (default) | `'top'` | `'origin'`

Location of the *x*-axis, specified as one of these values:

- `'bottom'` — Display the *x*-axis at the bottom of the axes.
- `'top'` — Display the *x*-axis at the top of the axes.
- `'origin'` — Display the *x*-axis so that it passes through the origin point (0,0).

This property applies only to 2-D views.

Example: `ax.XAxisLocation = 'origin'`

`YAxisLocation` — Location of y-axis

`'left'` (default) | `'right'` | `'origin'`

Location of *y*-axis, specified as one of these values:

- `'left'` — Display the *y*-axis on the left side of the axes.
- `'right'` — Display the *y*-axis on the right side of the axes.
- `'origin'` — Display the *y*-axis so that it passes through the origin point (0,0).

This property applies only to 2-D views.

Example: `ax.YAxisLocation = 'origin'`

`XColor`, `YColor`, `ZColor` — Color of axis line, tick values, and labels

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector | `'none'`

Color of the axis line, tick values, and labels in the *x*, *y*, or *z* direction, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the axes outline is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Setting this property sets the associated mode property to manual.

Setting the `XColor` property changes the *x*-axis label color, even if you previously specified the label color (for example, using the `xlabel` function). To prevent the `XColor` property from overriding the label color, set the `XColor` property first. Similarly, the `YColor` and `ZColor` properties override previously specified label colors.

Example: `ax.XColor = [1 1 0]`

Example: `ax.YColor = 'y'`

Example: `ax.ZColor = 'yellow'`

`XColorMode`, `YColorMode`, `ZColorMode` — Selection mode for axis line color

`'auto'` (default) | `'manual'`

Selection mode for the axis line color, specified as one of these values:

- `'auto'` — Use the default color. For related information about grid-line selection, see the GridColorMode property.
- `'manual'` — Use the manually specified color. To specify the color, set the `XColor`, `YColor`, or `ZColor` property.

Example: `ax.XColorMode = 'auto'`

`XDir`, `YDir`, `ZDir` — Direction of increasing values along axis

`'normal'` (default) | `'reverse'`

Direction of increasing values along axis, specified as one of these values:

- `'normal'` — Normal direction of increasing values:
  - *x*-axis values increase from left to right.
  - *y*-axis values increase from bottom to top (2-D view) or front to back (3-D view).
  - *z*-axis values increase pointing out of the screen (2-D view) or from bottom to top (3-D view).
- `'reverse'` — Reverse direction of increasing values:
  - *x*-axis values decrease from left to right.
  - *y*-axis values decrease from bottom to top (2-D view) or front to back (3-D view).
  - *z*-axis values decrease pointing out of the screen (2-D view) or from bottom to top (3-D view).

Example: `ax.XDir = 'normal'`

Example: `ax.YDir = 'reverse'`

`XScale`, `YScale`, `ZScale` — Scale of values along axis
`'linear'` (default) | `'log'`

Scale of values along axis, specified as `'linear'` or `'log'`.

Example: `ax.XScale = 'linear'`

Example: `ax.YScale = 'log'`

`XLim`, `YLim`, `ZLim` — Minimum and maximum axis limits
`[0 1]` (default) | two-element vector of the form `[min max]`

Minimum and maximum limits, specified as a two-element vector of the form `[min max]`, where `max` is greater than `min`. You can specify the limits as numeric, categorical, datetime, or duration values. However, the type of values that you specify must match the type of values along the axis.

You can specify both limits or you can specify one limit and let the axes automatically calculate the other. For an automatically calculated minimum or maximum limit, use `-inf` or `inf`, respectively.

Example: `ax.XLim = [0 10]`

Example: `ax.YLim = [-inf 10]`

Example: `ax.ZLim = [0 inf]`

Alternatively, use the `xlim`, `ylim`, and `zlim` functions to set the limits.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `datetime` | `duration`

`XLimMode`, `YLimMode`, `ZLimMode` — Selection mode for axis limits
`'auto'` (default) | `'manual'`

Selection mode for the axis limits, specified as one of these values:

- `'auto'` — Select axis limits based on the data plotted, that is, the total span of the `XData`, `YData`, or `ZData` of all the objects displayed in the axes.
- `'manual'` — Use manually specified axis limits. To specify the axis limits, set the `XLim`, `YLim`, or `ZLim` property.

Example: `ax.XLimMode = 'auto'`

Tick Values and Labels

`XTick`, `YTick`, `ZTick` — Tick mark locations

`[]` (default) | vector of increasing values

Tick mark locations, specified as a vector of increasing values.

Example: `ax.XTick = [2 4 6 8 10]`

Example: `ax.YTick = 0:10:100`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `datetime` | `duration`

`XTickMode`, `YTickMode`, `ZTickMode` — Selection mode for tick mark locations

`'auto'` (default) | `'manual'`

Selection mode for the tick mark locations, specified as one of these values:

- `'auto'` — Select the tick mark locations based on the range of data for the axis.
- `'manual'` — Use manually specified tick mark locations. To specify the values, set the `XTick`, `YTick`, or `ZTick` property.

Example: `ax.XTickMode = 'auto'`

`XTickLabel`, `YTickLabel`, `ZTickLabel` — Tick mark labels

`''` (default) | cell array of character vectors | string array

Tick mark labels, specified as a cell array of character vectors or a string array. If you do not specify enough labels for all the ticks values, then the axes cycles through the specified labels. Tick labels support TeX and LaTeX markup. See the TickLabelInterpreter property for more information.

Example: `ax.XTickLabel = {'Jan','Feb','Mar','Apr'}`

Data Types: `char` | `string`

`XTickLabelMode`, `YTickLabelMode`, `ZTickLabelMode` — Selection mode for tick mark labels

`'auto'` (default) | `'manual'`

Selection mode for the tick mark labels, specified as one of these values:

- `'auto'` — Label tick marks with numeric values that span the range of the plotted data.
- `'manual'` — Use manually specified tick mark labels. To specify the labels, set the `XTickLabel`, `YTickLabel`, or `ZTickLabel` property.

Example: `ax.XTickLabelMode = 'auto'`

`TickLabelInterpreter` — Interpretation of characters in tick labels
`'tex'` (default) | `'latex'` | `'none'`

Interpretation of tick label characters, specified as one of these values:

- `'tex'` — Interpret labels using a subset of TeX markup.
- `'latex'` — Interpret labels using a subset of LaTeX markup.
- `'none'` — Display literal characters

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the text type and color, and include special characters in the text.

This table lists the supported modifiers when the `TickLabelInterpreter` property is set to `'tex'`, which is the default value. Modifiers remain in effect until the end of the text, except for superscripts and subscripts which only modify the next character or the text within the curly braces `{}`.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (rarely available)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Set `specifier` as the name of a font family to change	`'\fontname{Courier} text'`

Modifier	Description	Example
	the font style. You can use this in combination with other modifiers.	
`\fontsize{specifier}`	Set `specifier` as a scalar numeric value to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Set `specifier` as a three-element RGB triplet to change the font color.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\iota	ι	\Sigma	Σ	\rightarrow	→
\kappa	κ	\Upsilon	ϒ	\Rightarrow	⇒
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	′
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `TickLabelInterpreter` property to `'latex'`. The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and

`FontAngle` properties do not have an effect. To change the font style, use LaTeX markup within the text.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

`XTickLabelRotation`, `YTickLabelRotation`, `ZTickLabelRotation` — Rotation of tick labels

`0` (default) | scalar value in degrees

Rotation of tick labels, specified as a scalar value in degrees. Negative values give clockwise rotation.

Example: `ax.XTickLabelRotation = 45`

Example: `ax.YTickLabelRotation = 90`

`XMinorTick`, `YMinorTick`, `ZMinorTick` — Display of minor tick marks

`'off'` | `'on'`

Display of minor tick marks, specified as one of these values:

- `'off'` — Do not display minor tick marks. This is the default value for an axis with a linear scale.
- `'on'` — Display minor tick marks between the major tick marks on the axis. The space between the major tick marks determines the number of minor tick marks. This is the default value for an axis with a log scale.

Example: `ax.XMinorTick = 'on'`

`TickLength` — Tick mark length

`[0.01 0.025]` (default) | two-element vector

Tick mark length, specified as a two-element vector of the form `[2Dlength 3Dlength]`. The first element is the tick mark length in 2-D views and the second element is the tick mark length in 3-D views. Specify the values in units normalized relative to the longest of the visible *x*-axis, *y*-axis, or *z*-axis lines.

Example: `ax.TickLength = [0.02 0.035]`

TickDir — Tick mark direction

'in' (default) | 'out' | 'both'

Tick mark direction, specified as one of these values:

- 'in' — Direct the tick marks inward from the axis lines. This is the default for 2-D views.
- 'out' — Direct the tick marks outward from the axis lines. This is the default for 3-D views.
- 'both' — Center the tick marks over the axis lines.

If the associated mode property is set to 'auto', then MATLAB chooses the tick label direction. If you set this property, then MATLAB sets the mode to 'manual' and does not automatically choose the tick label direction.

Example: ax.TickDir = 'out'

TickDirMode — Selection mode for TickDir

'auto' (default) | 'manual'

Selection mode for the TickDir property, specified as one of these values:

- 'auto' — Use default tick direction.
- 'manual' — Use manually specified tick mark direction. To specify the tick mark direction, set the TickDir property.

Example: ax.TickDirMode = 'auto'

Grid Lines

XGrid, YGrid, ZGrid — Display of grid lines

'off' (default) | 'on'

Display of grid lines, specified as one of these values:

- 'off' — Do not display the grid lines.
- 'on' — Display grid lines perpendicular to the axis, for example, along lines of constant x, y, or z values.

Alternatively, use the grid on or grid off command to set all three properties to 'on' or 'off', respectively. For more information, see grid.

Example: `ax.XGrid = 'on'`

`XMinorGrid`, `YMinorGrid`, `ZMinorGrid` — Display of minor grid lines

`'off'` (default) | `'on'`

Display of minor grid lines, specified as one of these values:

- `'off'` — Do not display grid lines.
- `'on'` — Display grid lines aligned with the minor tick marks of the axis. You do not need to enable minor ticks to display minor grid lines.

Alternatively, use the `grid minor` command to toggle the visibility of the minor grid lines.

Example: `ax.XMinorGrid = 'on'`

`GridLineStyle` — Line style for grid lines

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style used for grid lines, specified as one of the line styles in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

To display the grid lines, use the `grid on` command or set the `XGrid`, `YGrid`, or `ZGrid` property to `'on'`.

Example: `ax.GridLineStyle = '--'`

`MinorGridLineStyle` — Line style for minor grid lines

`':'` (default) | `'-'` | `'--'` | `'-.'` | `'none'`

Line style used for minor grid lines, specified as one of the line styles shown in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

To display minor grid lines, use the `grid minor` command or set the `XGridMinor`, `YGridMinor`, or `ZGridMinor` property to `'on'`.

Example: `ax.MinorGridLineStyle = '-.'`

`GridColor` — Color of grid lines

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector | `'none'`

Color of grid lines, specified as an RGB triplet, a character vector or a color name, or `'none'`.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`

Long Name	Short Name	RGB Triplet
'black'	'k'	[0 0 0]

To set the colors for the axes box outline, use the XColor, YColor, and ZColor properties.

Setting this property sets the associated mode property to manual.

Example: ax.GridColor = [0 0 1]

Example: ax.GridColor = 'b'

Example: ax.GridColor = 'blue'

GridColorMode — Selection mode for GridColor

'auto' (default) | 'manual'

Selection mode for the GridColor property, specified as 'auto' or 'manual'. The color is based on the values of the GridColorMode, XColorMode, YColorMode, and ZColorMode properties.

These tables list the grid line colors for different combinations of color modes.

GridColorMode Property	XColorMode Property	x-Axis Grid-Line Color
'auto'	'auto'	Use GridColor property.
'auto'	'manual'	Use XColor property.
'manual'	'auto'	Use GridColor property.
'manual'	'manual'	Use GridColor property.

GridColorMode Property	YColorMode Property	y-Axis Grid-Line Color
'auto'	'auto'	Use GridColor property.
'auto'	'manual'	Use YColor property.
'manual'	'auto'	Use GridColor property.
'manual'	'manual'	Use GridColor property.

GridColorMode Property	ZColorMode Property	z-Axis Grid-Line Color
'auto'	'auto'	Use GridColor property.

GridColorMode Property	ZColorMode Property	z-Axis Grid-Line Color
`'auto'`	`'manual'`	Use `ZColor` property.
`'manual'`	`'auto'`	Use `GridColor` property.
`'manual'`	`'manual'`	Use `GridColor` property.

Example: `ax.GridColorMode = 'auto'`

`MinorGridColor` — Color of minor grid lines

`[0.1 0.1 0.1]` (default) | RGB triplet | character vector

Color of minor grid lines, specified as an RGB triplet, a character vector of a color name, or `'none'`.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `ax.MinorGridColor = [0 0 1]`

Example: `ax.MinorGridColor = 'b'`

Example: `ax.MinorGridColor = 'blue'`

`MinorGridColorMode` — Selection mode for `MinorGridColor`

`'auto'` (default) | `'manual'`

Selection mode for the `MinorGridColor` property, specified as `'auto'` or `'manual'`. The minor grid line color is based on the values of the `MinorGridColorMode`, `XColorMode`, `YColorMode`, and `ZColorMode` properties.

These tables list the minor grid line colors for different combinations of color modes.

MinorGridColorMode Property	XColorMode Property	x-Axis Minor Grid-Line Color
`'auto'`	`'auto'`	Use `MinorGridColor` property.
`'auto'`	`'manual'`	Use `XColor` property.
`'manual'`	`'auto'`	Use `MinorGridColor` property.
`'manual'`	`'manual'`	Use `MinorGridColor` property.

MinorGridColorMode Property	YColorMode Property	y-Axis Minor Grid-Line Color
`'auto'`	`'auto'`	Use `MinorGridColor` property.
`'auto'`	`'manual'`	Use `YColor` property.
`'manual'`	`'auto'`	Use `MinorGridColor` property.
`'manual'`	`'manual'`	Use `MinorGridColor` property.

MinorGridColorMode Property	ZColorMode Property	z-Axis Minor Grid-Line Color
`'auto'`	`'auto'`	Use `MinorGridColor` property.
`'auto'`	`'manual'`	Use `ZColor` property.
`'manual'`	`'auto'`	Use `MinorGridColor` property.

MinorGridColorMode Property	ZColorMode Property	z-Axis Minor Grid-Line Color
`'manual'`	`'manual'`	Use `MinorGridColor` property.

Example: `ax.MinorGridColorMode = 'auto'`

`GridAlpha` — Grid-line transparency

`0.15` (default) | value in the range `[0,1]`

Grid-line transparency, specified as a value in the range `[0,1]`. A value of `1` means opaque and a value of `0` means completely transparent.

Example: `ax.GridAlpha = 0.5`

`GridAlphaMode` — Selection mode for `GridAlpha`

`'auto'` (default) | `'manual'`

Selection mode for the `GridAlpha` property, specified as one of these values:

- `'auto'` — Use default transparency value of `0.15`.
- `'manual'` — Use the manually specified transparency value. To specify the value, set the `GridAlpha` property.

Example: `ax.GridAlphaMode = 'auto'`

`MinorGridAlpha` — Minor grid line transparency

`0.25` (default) | value in the range `[0,1]`

Minor grid line transparency, specified as a value in the range `[0,1]`. A value of `1` means opaque and a value of `0` means completely transparent.

Example: `ax.MinorGridAlpha = 0.5`

`MinorGridAlphaMode` — Selection mode for `MinorGridAlpha`

`'auto'` (default) | `'manual'`

Selection mode for the `MinorGridAlpha` property, specified as one of these values:

- `'auto'` — Use the default transparency value of `0.25`.

- `'manual'` — Use the manually specified transparency value. To specify the value, set the `MinorGridAlpha` property.

Example: `ax.MinorGridAlphaMode = 'auto'`

`Layer` — Placement of grid lines and tick marks in relation to graphic objects

`'bottom'` (default) | `'top'`

Placement of grid lines and tick marks in relation to graphic objects, specified as one of these values:

- `'bottom'` — Display tick marks and grid lines under graphics objects.
- `'top'` — Display tick marks and grid lines over graphics objects.

This property affects only 2-D views.

Example: `ax.Layer = 'top'`

Font Style

`FontName` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`FontSize` — Font size

`10` (default) | scalar numeric value

Font size, specified as a scalar numeric value. The `FontSize`, `LabelFontSizeMultiplier`, and `TitleFontSizeMultiplier` properties determine the size of the text used for the axis labels and the title. The `FontUnits` property determines the units used to interpret the font size.

Example: `ax.FontSize = 12`

`TitleFontSizeMultiplier` — Scale factor for title font size

`1.1` (default) | numeric value greater than 0

Scale factor for title font size, specified as a numeric value greater than 0. The axes applies this scale factor to the value of the `FontSize` property to determine the font size for the title.

Example: `ax.TitleFontSizeMultiplier = 1.75`

`LabelFontSizeMultiplier` — Scale factor for label font size

`1.1` (default) | numeric value greater than 0

Scale factor for label font size, specified as a numeric value greater than 0. The axes applies this scale factor to the value of the `FontSize` property to determine the font size for the *x*-axis, *y*-axis, and *z*-axis labels.

Example: `ax.LabelFontSizeMultiplier = 1.5`

`FontUnits` — Font size units

`'points'` (default) | `'inches'` | `'centimeters'` | `'normalized'` | `'pixels'`

Font size units, specified as one of the values in this table.

Units	Description
`'points'`	Points. One point equals 1/72 inch.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'normalized'`	Interpret font size as a fraction of the axes height. If you resize the axes, the font size modifies accordingly. For example, if the `FontSize` is `0.1` in normalized units, then the text is 1/10 of the height value stored in the axes `Position` property.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems:

Units	Description
	• On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

If you set both the font size and the font units in one function call, you must set the `FontUnits` property first so that the axes correctly interprets the specified font size.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font might look the same as the normal font.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

`TitleFontWeight` — Thickness of title text

`'bold'` (default) | `'normal'`

Thickness of the title text, specified as one of these values:

- `'bold'` — Thicker characters outlines than normal.
- `'normal'` — Default weight as defined by the particular font.

Example: `ax.TitleFontWeight = 'normal'`

`FontSmoothing` — Text smoothing

`'on'` (default) | `'off'`

Text smoothing, specified as one of these values:

- `'on'` — Use antialiasing to make text appear smoother on the screen.
- `'off'` — Do not use antialiasing. Use this setting if the text seems blurry. In certain cases, smoothed text blends against the background color and results in a blurring effect.

Example: `ax.FontSmoothing = 'off'`

Title, Axis Labels, and Legend

`Title` — Text object for axes title

text object (default)

Text object for axes title. To add a title, set the `String` property of the text object. To change the title appearance, such as the font style or color, set other properties. For a complete list, see Text Properties.

```
ax = gca;
ax.Title.String = 'My Title';
ax.Title.FontWeight = 'normal';
```

Alternatively, use the `title` function to add a title and control the appearance.

```
title('My Title','FontWeight','normal')
```

Note: This text object is not contained in the axes Children property, cannot be returned by `findobj`, and does not use default values defined for text objects.

`XLabel`, `YLabel`, `ZLabel` — Text object for axis label

text object (default)

Text object for axis label. To add an axis label, set the `String` property of the text object. To change the label appearance, such as the font size, set other properties. For a complete list, see Text Properties.

```
ax = gca;
ax.YLabel.String = 'My y-Axis Label';
ax.YLabel.FontSize = 12;
```

Alternatively, use the `xlabel`, `ylabel`, and `zlabel` functions to add an axis label and control the appearance.

```
ylabel('My y-Axis Label','FontSize',12)
```

Note: These text objects are not contained in the axes Children property, cannot be returned by `findobj`, and do not use default values defined for text objects.

`Legend` — Legend associated with axes

`empty GraphicsPlaceholder` (default) | legend object

This property is read-only.

Legend associated with the axes, specified as a legend object. You can use this property to determine if the axes has a legend.

```
ax = gca;
lgd = ax.Legend
if ~isempty(lgd)
    disp('Legend Exists')
end
```

You also can use this property to access properties of an existing legend. For a complete list of properties, see Legend Properties.

```
plot(rand(3))
legend({'Line 1','Line 2','Line 3'},'FontSize',12)
ax = gca;
ax.Legend.TextColor = 'red';
```

Line Colors and Line Styles

`ColorOrder` — Colors for multiline plots

seven predefined colors (default) | three-column matrix of RGB triplets

Colors for multiline plots, specified as a three-column matrix of RGB triplets. Each row of the matrix defines one color in the color order. The default color order has seven colors

Default Color Order	Associated RGB Triplets
	[0 0.4470 0.7410 0.8500 0.3250 0.0980 0.9290 0.6940 0.1250 0.4940 0.1840 0.5560 0.4660 0.6740 0.1880 0.3010 0.7450 0.9330 0.6350 0.0780 0.1840]

Some graphics functions reset this property to the default value before plotting. To specify the color order, you can change the default value before plotting. For example, this code changes the default value for all future axes.

```
co = [1    0  0.4
    0.8  0.2  0.5
    0.6  0.4  0.6
    0.4  0.6  0.7
    0.2  0.8  0.8
      0    1  0.9];
set(groot,'defaultAxesColorOrder',co)
```

`ColorOrderIndex` — Next color to use in color order

1 (default) | positive integer

Next color to use in the color order, specified as a positive integer. For example, if this property is set to `1`, then the next plot added to the axes uses the first color in the color order. If the index value exceeds the number of colors in the color order, then the index value modulo the number of colors determines the next color used.

If you used a `hold on` command or if the `NextPlot` property of the axes is set to `'add'`, then the color order index value increases every time a new plot is added. Reset the color order by setting the `ColorOrderIndex` property to `1`.

Example: `ax.ColorOrderIndex = 5`

`LineStyleOrder` — Line styles and markers for multiline plots

`'-'` solid line (default) | cell array of line styles

Line styles and markers for multiline plots, specified as a cell array. You can combine line and marker specifiers in a single entry.

Example: `{'-*',':','o'}`

MATLAB cycles through the line styles only after using all the colors contained in the ColorOrder property. The default `LineStyleOrder` has only one line style.

Specifier	Line Style
`'-'` (default)	Solid line
`'--'`	Dashed line
`':'`	Dotted line
`'-.'`	Dash-dotted line
`'+'`	Plus sign markers
`'o'`	Circle markers
`'*'`	Star markers
`'.'`	Point markers
`'x'`	Cross markers
`'s'`	Square markers
`'d'`	Diamond markers
`'^'`	Upward-pointing triangle markers
`'v'`	Downward-pointing triangle markers
`'>'`	Right-pointing triangle markers
`'<'`	Left-pointing triangle markers
`'p'`	Five-pointed star (pentagram) markers
`'h'`	Six-pointed star (hexagram) markers

Some graphics functions reset this property to the default value before plotting. To specify the line styles, you can change the default value before plotting. For example, this code changes the default value for all future axes.

```
set(groot,'defaultAxesLineStyleOrder',{'-*',':','o'})
```

`LineStyleOrderIndex` — Next line style to use in line style order

1 (default) | positive integer

Next line style to use in the line style order, specified as a positive integer. For example, if this property is set to 1, then the next plot added to the axes uses the first line style in

the line style order. If the index value exceeds the number of line styles in the line style order, then the index value modulo the number of line styles determines the next line style used.

If you used a `hold on` command or if the `NextPlot` property of the axes is set to `'add'`, then the line style order index value increases every time a new plot is added. Subsequent plots cycle through the line style order. Reset the line style order by setting the `LineStyleOrderIndex` property to `1`.

Example: `ax.LineStyleOrderIndex = 1`

Color and Transparency Mapping

`CLim` — Color limits for objects using colormap

`[0 1]` (default) | two-element vector of the form `[cmin cmax]`

Color limits for objects in axes that use the colormap, specified as a two-element vector of the form `[cmin cmax]`. This property determines how data values map to the colors in the colormap where:

- `cmin` specifies the data value that maps to the first color in the colormap.
- `cmax` specifies the data value that maps to the last color in the colormap.

The axes linearly interpolates data values between `cmin` and `cmax` across the colormap. Values outside this range use either the first or last color, whichever is closest.

For information on changing the colormap, see the `colormap` function. For information on color mapping, see the `caxis` function.

If the associated mode property is set to `'auto'`, then MATLAB chooses the color limits. If you assign a value to this property, then MATLAB sets the mode to `'manual'` and does not automatically choose the color limits.

`CLimMode` — Selection mode for `CLim`

`'auto'` (default) | `'manual'`

Selection mode for the `CLim` property, specified as one of these values:

- `'auto'` — Set the `CLim` property to span the `CData` limits of the graphics objects displayed in the axes.

- `'manual'` — Use the manually specified values. To specify the values, set the `CLim` property. The axes does not change the values when the limits of the axes children change.

`ALim` — Alpha limits for images, patches, and surfaces with transparency

`[0 1]` (default) | two-element vector of the form `[amin amax]`

Alpha limits for images, patches, and surfaces with transparency, specified as a two-element vector of the form `[amin amax]`. This property determines how values in the `AlphaData` properties of image, patch, and surface objects map to the figure alpha map, where:

- `amin` specifies the data value mapped to the first alpha value in the figure alpha map.
- `amax` specifies the data value mapped to the last alpha value in the figure alpha map.

The axes linearly interpolates data values between `amin` and `amax` across the figure alpha map. Values outside this range use either the first or last alpha map value, whichever is closest.

The Alphamap property of the figure contains the alpha map. For more information, see the `alpha` function.

`ALimMode` — Selection mode for `ALim`

`'auto'` (default) | `'manual'`

Selection mode for the `ALim` property, specified as one of these values:

- `'auto'` — Set the alpha limits to span the `AlphaData` values of the graphics objects in the axes.
- `'manual'` — Use manually specified alpha limits. To specify the alpha limits, set the `ALim` property.

`AmbientLightColor` — Background light color

`[1 1 1]` (default) | RGB triplet | character vector | `'none'`

Background light color, specified as an RGB triplet, a character vector of a color name, or `'none'`. The light is a directionless light that shines uniformly on all objects in the axes when there is a visible light object in the axes.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

The 'none' option is equivalent to using an RGB triplet value of [0 0 0].

Example: ax.AmbientLightColor = [1 0 1]

Example: ax.AmbientLightColor = 'm'

Example: ax.AmbientLightColor = 'magenta'

Multiple Plots

NextPlot — Properties to reset when adding new plot

'replace' (default) | 'add' | 'replacechildren' | 'replaceall'

Properties to reset when adding a new plot to the axes, specified as one of these values:

- 'add' — Add new plots to the existing axes. Do not delete existing plots or reset axes properties before displaying the new plot.
- 'replacechildren' — Delete existing plots before displaying the new plot. Reset the ColorOrderIndex and LineStyleOrderIndex properties to 1, but do not reset other axes properties. The next plot added to the axes uses the first color and line style based on the ColorOrder and LineStyle order properties. This value is similar to using cla before every new plot.
- 'replace' — Delete existing plots and reset all axes properties, except Position and Units, to their default values before displaying the new plot.

- `'replaceall'` — Delete existing plots and reset all axes properties, except `Position` and `Units`, to their default values before displaying the new plot. This value is similar to using `cla reset` before every new plot.

Note: For axes with only one *y*-axis, the `'replace'` and `'replaceall'` property values are equivalent. For axes with two *y*-axes, the `'replace'` value affects only the active side while the `'replaceall'` value affects both sides.

Figures also have a NextPlot property. Alternatively, you can use the `newplot` function to prepare figures and axes for subsequent graphics commands.

`SortMethod` — Order for rendering objects

`'depth'` (default) | `'childorder'`

Order for rendering objects, specified as one of these values:

- `'depth'` — Draw objects in back-to-front order based on the current view. Use this value to ensure that objects in front of other objects are drawn correctly.
- `'childorder'` — Draw objects in the order in which they are created by graphics functions, without considering the relationship of the objects in three dimensions. This value can result in faster rendering, particularly if the figure is very large, but can also result in improper depth sorting of the objects displayed

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of objects to axes limits

`'on'` (default) | `'off'`

Clipping of objects to the axes limits, specified as either `'on'` or `'off'`. The clipping behavior of an object within the `Axes` object depends on both the `Clipping` property of

the `Axes` object and the `Clipping` property of the individual object. The property value of the `Axes` object has these effects:

- `'on'` — Allow each individual object within the axes to control its own clipping behavior based on the `Clipping` property value for the object.
- `'off'` — Disable clipping for all objects within the axes, regardless of the `Clipping` property value for the individual objects. Parts of objects can appear outside of the axes limits. For example, parts can appear outside the limits if you create a plot, use the `hold on` command, freeze the axis scaling, and then add a plot that is larger than the original plot.

This table lists the results for different combinations of `Clipping` property values.

Clipping Property for Axes Object	Clipping Property for Individual Object	Result
`'on'`	`'on'`	Individual object is clipped. Others might or might not be.
`'on'`	`'off'`	Individual object is not clipped. Others might or might not be.
`'off'`	`'on'`	Individual object and other objects are not clipped.
`'off'`	`'off'`	Individual object and other objects are not clipped.

Thick lines and markers might display outside the axes limits, even if clipping is enabled. If a plot contains markers, then as long as the data point lies within the axes, MATLAB draws the entire marker. If a plot uses thick lines, then part of the line might appear outside the limits depending on the value of the `ClippingStyle` property of the `Axes` object.

- When the `ClippingStyle` property is set to `'3dbox'` (the default), MATLAB draws the line using the full line width even if part of the line width is outside the axes.
- When the `ClippingStyle` property is set to `'rectangle'`, MATLAB clips the line width at the limits.

`ClippingStyle` — Boundaries used for clipping

`'3dbox'` (default) | `'rectangle'`

Boundaries used for clipping, specified as one of the values in this table.

Value	Descriptions	Illustration of Boundary Region
`'3dbox'`	Clip plotted objects to the six sides of the axes box defined by the axis limits.	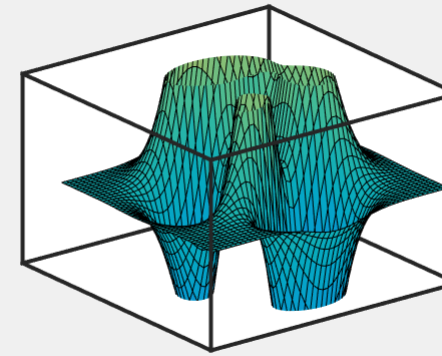
`'rectangle'`	Clip plotted objects to a rectangular boundary enclosing the axes in any given view.	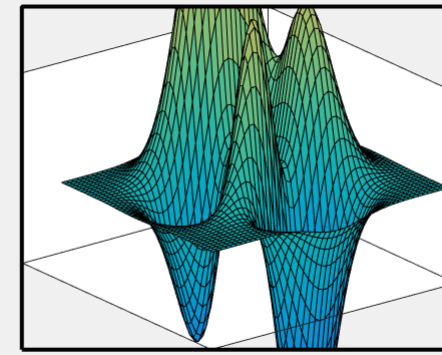

The `ClippingStyle` property has no effect if the `Clipping` property is set to `'off'`.

Location and Size

`Position` — Size and location, excluding margin for labels

`[0.1300 0.1100 0.7750 0.8150]` (default) | four-element vector of form `[left bottom width height]`

Size and location, excluding a margin for the labels, specified as a four-element vector of the form `[left bottom width height]`.

- The `left` and `bottom` elements define the distance from the lower left corner of the container (typically a figure, uipanel, or uitab) to the lower left corner of the position boundary.
- The `width` and `height` elements are the position boundary dimensions.

By default, the values are measured in units normalized to the container. To change the units, set the `Units` property.

The red rectangle shows the region defined by the `Position` property. The region does not include the tick labels, axis labels, or title. For axes in a 3-D view, the `Position` property is the smallest rectangle that encloses the axes.

2-D View of Axes	3-D View of Axes
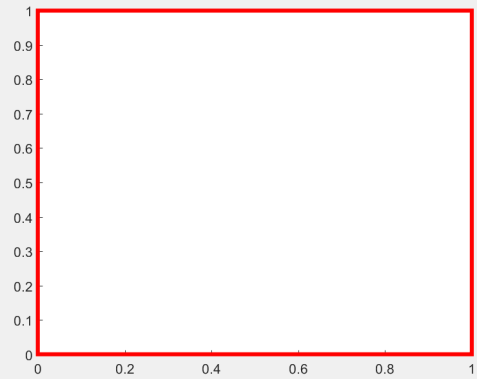	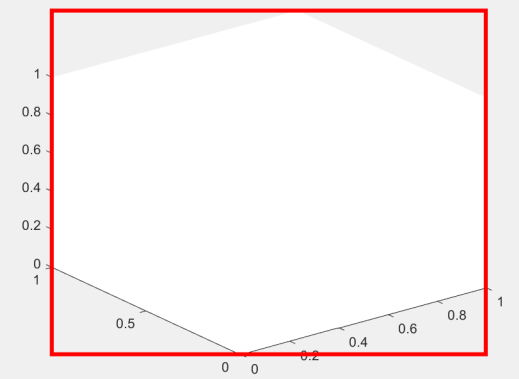

If you want to specify the position and account for the text around the axes, then set the `OuterPosition` property instead. The `ActivePositionProperty` determines whether to base the axes size on the `Position` or `OuterPosition` property values. Other axes properties that affect the size and shape include the DataAspectRatio, PlotBoxAspectRatio, and CameraViewAngle properties. The actual axes size is the largest possible size that conforms to all the position-related properties without extending outside the position boundary.

For more information on the axes position, see “Control Axes Layout”.

`TightInset` — Margins for text labels

four-element vector of the form `[left bottom right top]`

This property is read-only.

Margins for the text labels, specified as a four-element vector of the form `[left bottom right top]`. The elements define the distances between the bounds of the `Position` property and the extent of the axes text labels and title. By default, the values are measured in units normalized to the figure or uipanel that contains the axes. To change the units, set the `Units` property.

The `Position` property and the `TightInset` property define the tightest bounding box that encloses the axes and its labels and title. The figure shows the region defined by combining the `TightInset` values and the `Position` values.

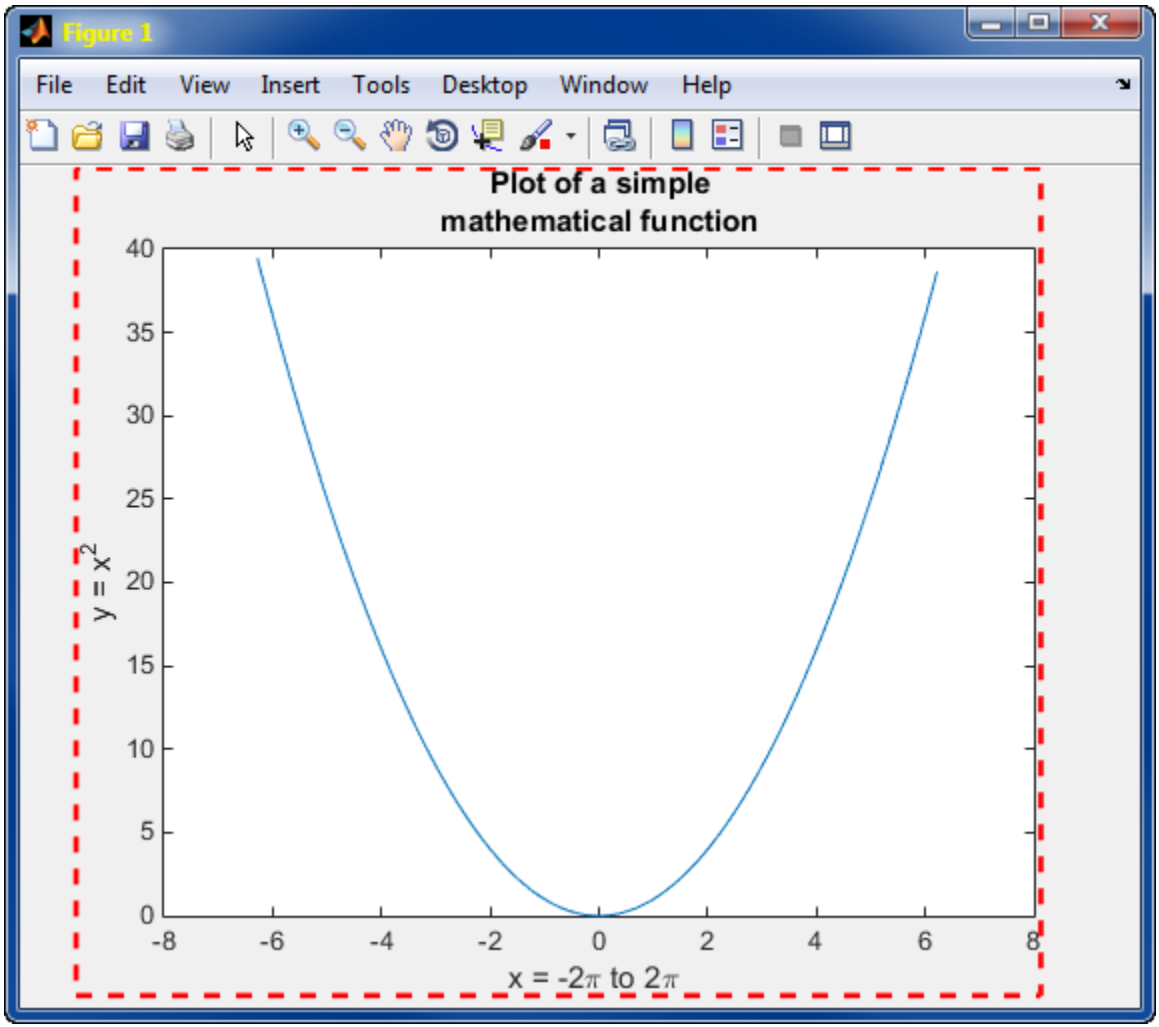

For more information, see “Control Axes Layout”.

`OuterPosition` — Size and location, including labels and margin

`[0 0 1 1]` (default) | four-element vector of the form `[left bottom width height]`

Size and location, including the labels and a margin, specified as a four-element vector of the form `[left bottom width height]`. The default value of `[0 0 1 1]` includes the whole interior of the container.

- The `left` and `bottom` elements define the distance from the lower left corner of the container (typically a figure, uipanel, or uitab) to the lower left corner of the outer position boundary.
- The `width` and `height` elements are the outer position boundary dimensions.

By default, the values are measured in units normalized to the container. To change the units, set the `Units` property.

The red rectangle shows the region defined by the `OuterPosition` property. The illustrations show an outer position value of `[0.1 0.1 0.8 0.8]`.

2-D View of Axes	3-D View of Axes
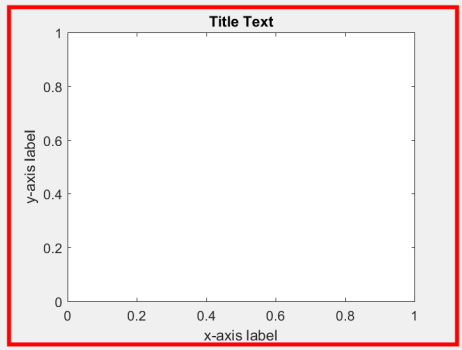	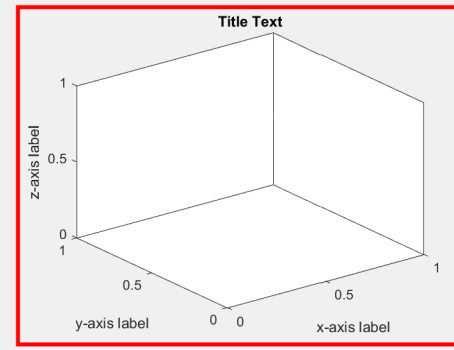

For more information on the axes position, see “Control Axes Layout”.

`ActivePositionProperty` — Position property to hold constant during resize operation

`'outerposition'` (default) | `'position'`

Position property to hold constant during resize operation, specified as one of these values:

- `'outerposition'` — Hold the `OuterPosition` property constant. Resizing the figure does not clip any of the text.
- `'position'` — Hold the `Position` property constant.

A figure can change size if you interactively change resize it or during a printing or exporting operation.

`Units` — Position units
`'normalized'` (default) | `'inches'` | `'centimeters'` | `'points'` | `'pixels'` | `'characters'`

Position units, specified as one of the values in this table.

Units	Description
`'normalized'` (default)	Normalized with respect to the container, which is typically the figure or a uipanel. The lower left corner of the container maps to `(0,0)` and the upper right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default uicontrol font of the graphics root object: • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Typography points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

When specifying the units as a `Name,Value` pair during object creation, you must set the `Units` property before specifying the properties that you want to use these units, such as `Position`.

Aspect Ratio

`Projection` — Type of projection onto 2-D screen

`'orthographic'` (default) | `'perspective'`

Type of projection onto 2-D screen, specified as one of these values:

- `'orthographic'` — Maintain the correct relative dimensions of graphics objects regarding the distance of a given point from the viewer, and draw lines that are parallel in the data on the screen.
- `'perspective'` — Incorporate foreshortening, which allows you to perceive depth in 2-D representations of 3-D objects. Perspective projection does not preserve the relative dimensions of objects. Instead, it displays a distant line segment smaller than a nearer line segment of the same length. Lines that are parallel in the data might not appear parallel on screen.

`DataAspectRatio` — Relative length of data units along each axis

`[1 1 1]` (default) | three-element vector of the form `[dx dy dz]`

Relative length of data units along each axis, specified as a three-element vector of the form `[dx dy dz]`. This vector defines the relative *x*, *y*, and *z* data scale factors. For example, specifying this property as `[1 2 1]` sets the length of one unit of data in the *x*-direction to be the same length as two units of data in the *y*-direction and one unit of data in the *z*-direction.

The `DataAspectRatio` property interacts with the PlotBoxAspectRatio, XLimMode, YLimMode, and ZLimMode properties to control how MATLAB scales the *x*-axis, *y*-axis, and *z*-axis.

Setting a value for the `DataAspectRatio` disables the “stretch-to-fill figure shape” behavior if `DataAspectRatioMode`, `PlotBoxAspectRatioMode`, and `CameraViewAngleMode` are all set to `'auto'`.

If the associated mode property is set to `'auto'`, then MATLAB chooses the ratio values. If you set this property, then MATLAB sets the mode to `'manual'`.

Example: `[1 1 1]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`DataAspectRatioMode` — Selection mode for `DataAspectRatio`
`'auto'` (default) | `'manual'`

Selection mode for the `DataAspectRatio` property, specified as one of these values:

- `'auto'` — Use values that make best use of the area provided by the figure.
- `'manual'` — Use the manually specified values. To specify the values, set the `DataAspectRatio` property. Changing `DataAspectRatioMode` to `'manual'` disables the "stretch-to-fill figure shape" behavior if `DataAspectRatioMode`, `PlotBoxAspectRatioMode`, and `CameraViewAngleMode` are all `'auto'`.

  This table describes the behavior for various combinations of properties when you disable the stretch-to-fill behavior.

XLimitMode, YLimitMode, and ZLimitMode	DataAspectRatioMode	PlotBoxAspectRatioMode	Behavior
`'auto'`	`'auto'`	`'auto'`	MATLAB chooses limits that span the data range in all dimensions.
`'auto'`	`'auto'`	`'manual'`	MATLAB chooses limits that span the data range in all dimensions, and modifies `DataAspectRatio` to achieve the specified `PlotBoxAspectRatio` within those limits.
`'auto'`	`'manual'`	`'auto'`	MATLAB chooses limits that span the data range in all dimensions, and modifies `PlotBoxAspectRatio` to achieve the specified

XLimitMode, YLimitMode, and ZLimitMode	DataAspectRatioMode	PlotBoxAspectRatioMode	Behavior
			`DataAspectRatio` within those limits.
`'auto'`	`'manual'`	`'manual'`	MATLAB chooses limits that completely fit and center the plot within the specified `PlotBoxAspectRatio` given the specified `DataAspectRatio`. This might produce empty space around 2 of the 3 dimensions.
`'manual'`	`'auto'`	`'auto'`	MATLAB honors the specified limits and modifies the `DataAspectRatio` and `PlotBoxAspectRatio` as necessary.
`'manual'`	`'auto'`	`'manual'`	The axes honors the specified limits and `PlotBoxAspectRatio` values, and modifies the `DataAspectRatio` values as necessary.
`'manual'`	`'manual'`	`'auto'`	The axes honors the specified limits and `DataAspectRatio` values and modifies the `PlotBoxAspectRatio` values as necessary.
One set to `'manual'` and two set to `'auto'`	`'manual'`	`'manual'`	MATLAB selects the limits to honor the specified aspect ratios and specified limits.

XLimitMode, YLimitMode, and ZLimitMode	DataAspectRatioMode	PlotBoxAspectRatioMode	Behavior
Two set to `'manual'` and one set to `'auto'`, or all three set to `'manual'`	`'manual'`	`'manual'`	MATLAB ignores the `PlotBoxAspectRatio` value and uses the specified limits and `DataAspectRatio`.

`PlotBoxAspectRatio` — Relative length of each axis

`[1 1 1]` (default) | three-element vector of the form `[px py pz]`

Relative length of each axis, specified as a three-element vector of the form `[px py pz]` defining the relative *x*-axis, *y*-axis, and *z*-axis scale factors. The plot box is a box enclosing the axes data region as defined by the axis limits.

The `PlotBoxAspectRatio` property interacts with the `DataAspectRatio`, `XLimMode`, `YLimMode`, and `ZLimMode` properties. Setting the `PlotBoxAspectRatio` disables the "stretch-to-fill figure shape" behavior, if `DataAspectRatioMode`, `PlotBoxAspectRatioMode`, and `CameraViewAngleMode` are all `'auto'`.

If the associated mode property is set to `'auto'`, then MATLAB chooses the ratio values. If you set this property, then MATLAB sets the mode to `'manual'`.

Example: `[1,0.75,0.75]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`PlotBoxAspectRatioMode` — Selection mode for `PlotBoxAspectRatio`

`'auto'` (default) | `'manual'`

Selection mode for the `PlotBoxAspectRatio` property, specified as one of these values:

- `'auto'` — Use values that make best use of the area provided by the figure.
- `'manual'` — Use the manually specified values. To specify the values, set the `PlotBoxAspectRatio` property. Changing `PlotBoxAspectRatioMode` to `'manual'` disables the "stretch-to-fill figure shape" behavior if `PlotBoxAspectRatioMode`, `DataAspectRatioMode`, and `CameraViewAngleMode` are all `'auto'`.

This table describes the behavior for various combinations of properties when you disable the stretch-to-fill behavior.

XLimitMode, YLimitMode, and ZLimitMode	DataAspectRatioMode	PlotBoxAspectRatioMode	Behavior
`'auto'`	`'auto'`	`'auto'`	MATLAB chooses limits that span the data range in all dimensions.
`'auto'`	`'auto'`	`'manual'`	MATLAB chooses limits that span the data range in all dimensions, and modifies `DataAspectRatio` to achieve the specified `PlotBoxAspectRatio` within those limits.
`'auto'`	`'manual'`	`'auto'`	MATLAB chooses limits that span the data range in all dimensions, and modifies `PlotBoxAspectRatio` to achieve the specified `DataAspectRatio` within those limits.
`'auto'`	`'manual'`	`'manual'`	MATLAB chooses limits that completely fit and center the plot within the specified `PlotBoxAspectRatio` given the specified `DataAspectRatio`. This might produce empty space around 2 of the 3 dimensions.

XLimitMode, YLimitMode, and ZLimitMode	DataAspectRatioMode	PlotBoxAspectRatioMode	Behavior
`'manual'`	`'auto'`	`'auto'`	MATLAB honors the specified limits and modifies the `DataAspectRatio` and `PlotBoxAspectRatio` as necessary.
`'manual'`	`'auto'`	`'manual'`	The axes honors the specified limits and `PlotBoxAspectRatio` values, and modifies the `DataAspectRatio` values as necessary.
`'manual'`	`'manual'`	`'auto'`	The axes honors the specified limits and `DataAspectRatio` values and modifies the `PlotBoxAspectRatio` values as necessary.
One set to `'manual'` and two set to `'auto'`	`'manual'`	`'manual'`	MATLAB selects the limits to honor the specified aspect ratios and specified limits.
Two set to `'manual'` and one set to `'auto'`, or all three set to `'manual'`	`'manual'`	`'manual'`	MATLAB ignores the `PlotBoxAspectRatio` value and uses the specified limits and `DataAspectRatio`.

View

`CameraPosition` — Location of camera

three-element vector of the form `[x y z]`

Location of camera, or the viewpoint, specified as a three-element vector of the form `[x y z]`. This vector defines the axes coordinates of the location. Changing the `CameraPosition` property changes the point from which you view the axes.

The camera is oriented along the view axis, which is a straight line that connects the camera position and the camera target. For an illustration, see “Camera Graphics Terminology”.

If the Projection is `'perspective'`, then as you change the `CameraPosition`, the amount of perspective also changes.

If the associated mode property is set to `'auto'`, then MATLAB chooses the camera location. If you set this property, then MATLAB sets the mode to `'manual'`.

Data Types: `single` | `double`

`CameraPositionMode` — Selection mode for `CameraPosition`
`'auto'` (default) | `'manual'`

Selection mode for the `CameraPosition` property, specified as one of these values:

- `'auto'` — Calculate the `CameraPosition` value such that the camera lies a fixed distance from the target along the azimuth and elevation specified by the current view, as returned by the `view` function. Functions like `rotate3d`, `zoom`, and `pan`, change this mode to `'auto'` to perform their actions.
- `'manual'` — Use the manually specified value. To specify the value, set the `CameraPosition` property.

This table summarizes the camera behavior for various combinations of `CameraViewAngleMode`, `CameraTargetMode`, and `CameraPositionMode` property values.

`CameraViewAngleMode`	`CameraTargetMode`	`CameraPositionMode`	Behavior
`'auto'`	`'auto'`	`'auto'`	Sets `CameraTarget` to plot box centroid, sets `CameraViewAngle` to capture entire scene, sets `CameraPosition` along the view axis.
`'auto'`	`'auto'`	`'manual'`	Sets `CameraTarget` to plot box centroid, sets `CameraViewAngle` to capture entire scene.
`'auto'`	`'manual'`	`'auto'`	Sets `CameraViewAngle` to

CameraViewAngleMode	CameraTargetMode	CameraPositionMode	Behavior
			capture entire scene, sets CameraPosition along the view axis.
'auto'	'manual'	'manual'	Sets CameraViewAngle to capture entire scene.
'manual'	'auto'	'auto'	Sets CameraTarget to plot box centroid, sets CameraPosition along the view axis.
'manual'	'auto'	'manual'	Sets CameraTarget to plot box centroid.
'manual'	'manual'	'auto'	Sets CameraPosition along the view axis.
'manual'	'manual'	'manual'	Uses specified camera values

CameraTarget — Point used as camera target
three-element vector of the form [x y z]

Point used as camera target, specified as a three-element vector of the form [x y z]. This vector defines the axes coordinates of the point. The camera is oriented along the view axis, which is a straight line that connects the camera position and the camera target. For an illustration, see "Camera Graphics Terminology".

If the associated mode property is set to 'auto', then MATLAB chooses the camera target point. If you set this property, then MATLAB sets the mode to 'manual'.

Data Types: single | double

CameraTargetMode — Selection mode for CameraTarget
'auto' (default) | 'manual'

Selection mode for the CameraTarget property, specified as one of these values:

- 'auto' — Position the camera target at the centroid of the axes plot box.
- 'manual' — Use the manually specified camera target value. To specify a value, set the CameraTarget property.

This table summarizes the camera behavior for various combinations of `CameraViewAngleMode`, `CameraTargetMode`, and `CameraPositionMode` property values.

`CameraViewAngleMode`	`CameraTargetMode`	`CameraPositionMode`	Behavior
`'auto'`	`'auto'`	`'auto'`	Sets `CameraTarget` to plot box centroid, sets `CameraViewAngle` to capture entire scene, sets `CameraPosition` along the view axis.
`'auto'`	`'auto'`	`'manual'`	Sets `CameraTarget` to plot box centroid, sets `CameraViewAngle` to capture entire scene.
`'auto'`	`'manual'`	`'auto'`	Sets `CameraViewAngle` to capture entire scene, sets `CameraPosition` along the view axis.
`'auto'`	`'manual'`	`'manual'`	Sets `CameraViewAngle` to capture entire scene.
`'manual'`	`'auto'`	`'auto'`	Sets `CameraTarget` to plot box centroid, sets `CameraPosition` along the view axis.
`'manual'`	`'auto'`	`'manual'`	Sets `CameraTarget` to plot box centroid.
`'manual'`	`'manual'`	`'auto'`	Sets `CameraPosition` along the view axis.
`'manual'`	`'manual'`	`'manual'`	Uses specified camera values

`CameraUpVector` — Vector defining upwards direction

`[0 1 0]` (default for 2-D view) | `[0 0 1]` (default for 3-D view) | three-element direction vector of the form `[x y z]`

Vector defining upwards direction, specified as a three-element direction vector of the form `[x y z]`. For an illustration, see "Camera Graphics Terminology".

If the associated mode property is set to `'auto'`, then MATLAB chooses the vector values. If you set this property, then MATLAB sets the mode to `'manual'`.

Example: `[sin(45) cos(45) 1]`

`CameraUpVectorMode` — Selection mode for `CameraUpVector`

`'auto'` (default) | `'manual'`

Selection mode for the `CameraUpVector` property, specified as one of these values:

- `'auto'` — Use `[0 0 1]` for 3-D views so that the positive *z*-direction is up. Use `[0 1 0]` for 2-D views so that the positive *y*-direction is up.
- `'manual'` — Use the manually specified vector defining the upwards direction. To specify a value, set the CameraUpVector property.

`CameraViewAngle` — Field of view

`6.6086` (default) | scalar angle in range [0,180)

Field of view, specified as a scalar angle greater than 0 and less than or equal to 180. Changing the camera view angle affects the size of graphics objects displayed in the axes, but does not affect the degree of perspective distortion. The greater the angle, the larger the field of view and the smaller objects appear in the scene. For an illustration, see "Camera Graphics Terminology".

If the associated mode property is set to `'auto'`, then MATLAB chooses the field of view value. If you set this property, then MATLAB sets the mode to `'manual'`.

Example: `15`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`CameraViewAngleMode` — Selection mode for `CameraViewAngle`

`'auto'` (default) | `'manual'`

Selection mode for the `CameraViewAngle` property, specified as one of these values:

- `'auto'` — Select the field of view as the minimum angle that captures the entire scene, up to 180 degrees.
- `'manual'` — Use the manually specified field of view. To specify a value, set the CameraViewAngle property.

This table summarizes the camera behavior for various combinations of `CameraViewAngleMode`, `CameraTargetMode`, and `CameraPositionMode` property values.

`CameraViewAngleMode`	`CameraTargetMode`	`CameraPositionMode`	Behavior
`'auto'`	`'auto'`	`'auto'`	Sets `CameraTarget` to plot box centroid, sets `CameraViewAngle` to capture entire scene, sets `CameraPosition` along the view axis.
`'auto'`	`'auto'`	`'manual'`	Sets `CameraTarget` to plot box centroid, sets `CameraViewAngle` to capture entire scene.
`'auto'`	`'manual'`	`'auto'`	Sets `CameraViewAngle` to capture entire scene, sets `CameraPosition` along the view axis.
`'auto'`	`'manual'`	`'manual'`	Sets `CameraViewAngle` to capture entire scene.
`'manual'`	`'auto'`	`'auto'`	Sets `CameraTarget` to plot box centroid, sets `CameraPosition` along the view axis.
`'manual'`	`'auto'`	`'manual'`	Sets `CameraTarget` to plot box centroid.
`'manual'`	`'manual'`	`'auto'`	Sets `CameraPosition` along the view axis.
`'manual'`	`'manual'`	`'manual'`	Uses specified camera values

`View` — Azimuth and elevation of view

`[0 90]` (default) | two-element vector of the form `[azimuth elevation]`

Azimuth and elevation of view, specified as a two-element vector of the form `[azimuth elevation]` defined in degree units.

Example: `ax.View = [45 45];`

Identifiers

`Type` — Type of graphics object
`'axes'`

This property is read-only.

Type of graphics object returned as `'axes'`.

`Tag` — Tag to associate with axes
`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object
`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Parent/Child

`Parent` — Parent of axes
figure object | uipanel object | uitab object

Parent of axes, specified as figure object, uipanel object, or uitab object.

`Children` — Children

empty `GraphicsPlaceholder` array | array of graphics objects

Children, returned as an array of graphics objects. Use this property to view a list of the children or to reorder the children by setting the property to a permutation of itself.

You cannot add or remove children using the `Children` property. To add a child to this list, set the `Parent` property of the child graphics object to the `Axes` object.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`CurrentPoint` — Location of mouse pointer

2-by-3 array

Location of mouse pointer, specified as a 2-by-3 array. The `CurrentPoint` property contains the coordinates of two points defined by the location of the mouse pointer with respect to the requested axes.

The two points indicate the location of the last mouse click, unless there is a WindowButtonMotionFcn callback defined for the figure. If the `WindowButtonMotionFcn` callback is defined, then the points indicate the last location of the mouse pointer.

If the click is within the axes in orthogonal projection, then the two points lie on the line that is perpendicular to the plane of the screen and that passes through the pointer. This is true for both 2-D and 3-D views.

The 3-D coordinates are the points, in the axes coordinate system, where this line intersects the front and back surfaces of the axes volume (which is defined by the axes x, y, and z limits).

The returned matrix is of the form:

```
[xfront yfront zfront
 xback  yback  zback]
```

The first row defines the point nearest to the camera position. The second row specified the point furthest from the camera position.

If the click is outside the axes in orthogonal projection, but within the figure, the returned values are:

- Back point — Point in the plane of the camera target (which is perpendicular to the viewing axis).
- Front point — Point in the camera position plane (which is perpendicular to the viewing axis).

These points lie on a line that passes through the pointer and is perpendicular to the camera target and camera position planes.

The values of the current point when using perspective projection can be different from the same point in orthographic projection because the shape of the axes volume can be different.

Clicking outside of the axes volume in perspective projection returns the front point as the current camera position at all times. Only the back point updates with the coordinates of a point that lies on a line extending from the camera position through the pointer and intersecting the camera target at that point.

For related information, see the axes Projection, CameraPosition, and CameraTarget properties. Also, see the figure CurrentPoint properties.

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the `Axes` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'`. The `HitTest` property determines if the `Axes` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Axes` object passes the click to the object below it in the current view of the figure window, which is typically the axes or the figure. The `HitTest` property has no effect.

If you want an object to be clickable when it is underneath other objects that you do not want to be clickable, then set the `PickableParts` property of the other objects to `'none'` so that the click passes through them.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Axes` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Axes` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Axes` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Axes` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Axes` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`axes` | `axis` | `box` | `caxis` | `cla` | `gca` | `grid`

Topics
"Access Property Values"
"Graphics Object Properties"

axis

Set axis limits and aspect ratios

Syntax

```
axis(limits)

axis style
axis mode
axis ydirection
axis visibility

lim = axis
[m,v,d] = axis('state')

___ = axis(ax,___)
```

Description

`axis(limits)` specifies the limits for the current axes. Specify the limits as vector of four, six, or eight elements.

`axis style` uses a predefined style to set the limits and scaling. For example, specify the style as `equal` to use equal data unit lengths along each axis.

`axis mode` sets whether MATLAB automatically chooses the limits or not. Specify the mode as `manual`, `auto`, or one of the semiautomatic options, such as `'auto x'`.

`axis ydirection`, where `ydirection` is `ij`, places the origin at the upper left corner of the axes. The *y* values increase from top to bottom. The default for `ydirection` is `xy`, which places the origin at the lower left corner. The *y* values increase from bottom to top.

`axis visibility`, where `visibility` is `off`, turns off the display of the axes background. Plots in the axes still display. The default for `visibility` is `on`, which displays the axes background.

`lim = axis` returns the *x*-axis and *y*-axis limits for the current axes. For 3-D axes, it also returns the *z*-axis limits. For polar axes, it returns the *theta*-axis and *r*-axis limits.

`[m,v,d] = axis('state')` returns the current settings for the axis limit selection, the axes visibility, and the *y*-axis direction. This syntax will be removed in a future release. Use the XLimMode, YLimMode, ZLimMode, Visible, and YDir properties of the axes to get the values instead.

`___ = axis(ax, ___ )` uses the axes or polar axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes. Use single quotes around input arguments that are character vectors, such as `axis(ax,'equal')`.

Examples

Set Axis Limits

Plot the sine function.

```
x = linspace(0,2*pi);
y = sin(x);
plot(x,y,'-o')
```

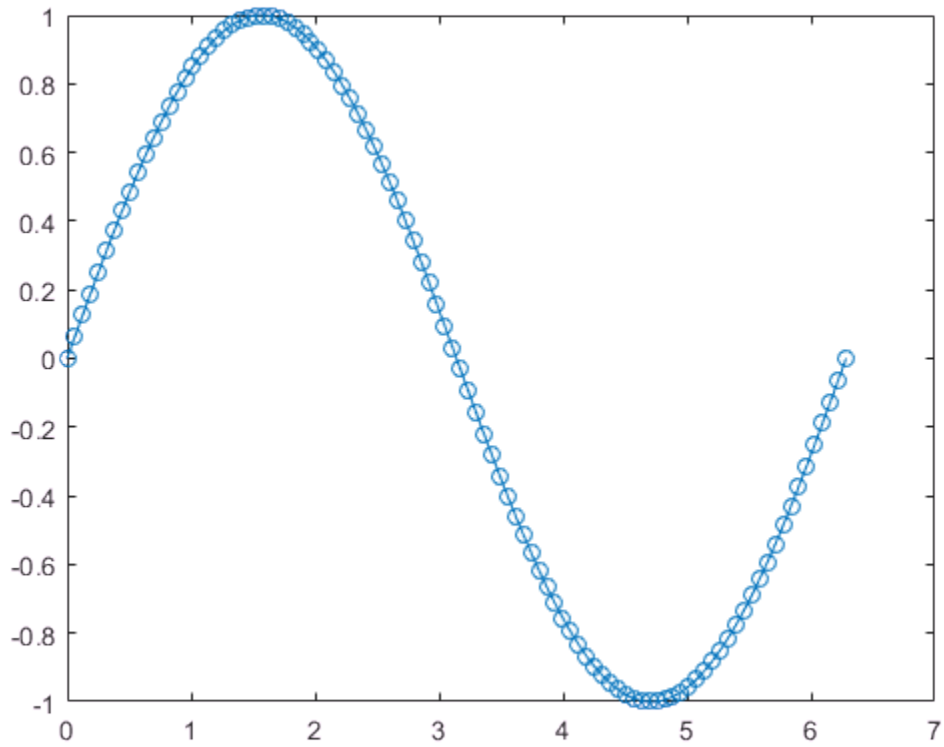

Change the axis limits so that the *x*-axis ranges from 0 to 2π and the *y*-axis ranges from -1.5 to 1.5.

```
axis([0 2*pi -1.5 1.5])
```

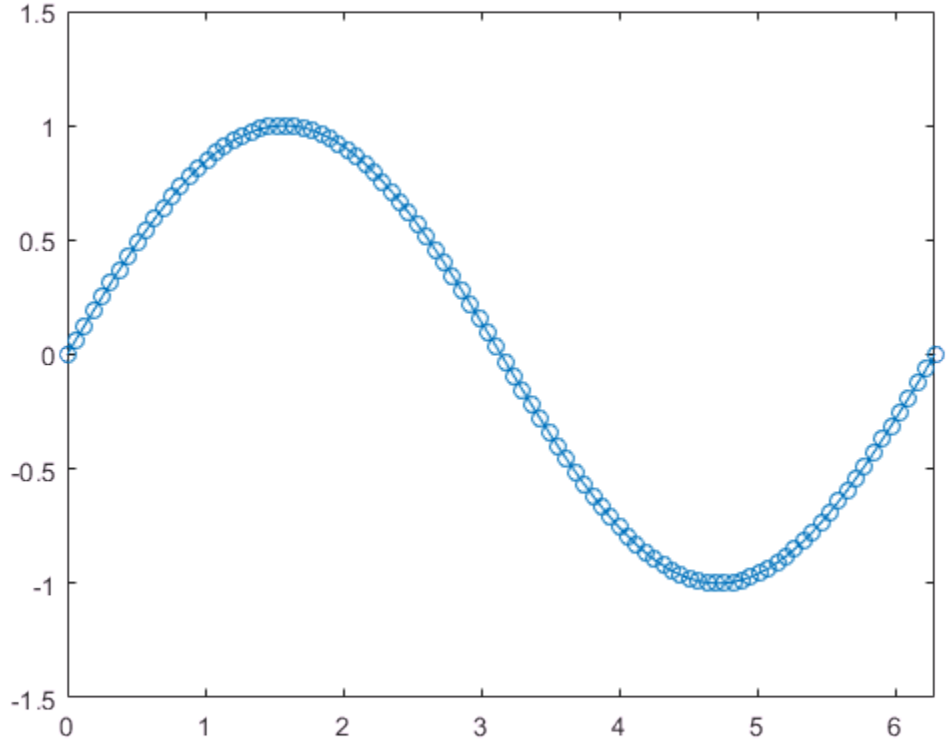

Use Semiautomatic Axis Limits

Create a plot. Set the limits for the *x*-axis and set the minimum *y*-axis limit. Use an automatically calculated value for the maximum *y*-axis limit.

```
x = linspace(-10,10,200);
y = sin(4*x)./exp(.1*x);
plot(x,y)
axis([-10 10 0 inf])
```

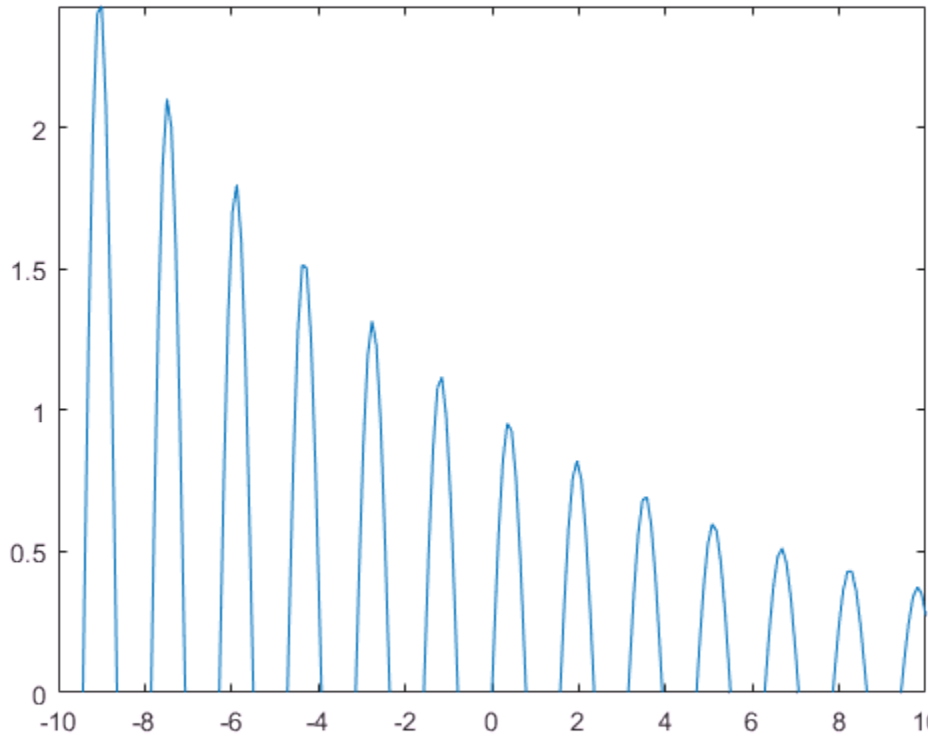

Set Axis Limits for Multiple Axes

Create a figure with two subplots. Plot a sine wave in each subplot. Then, set the axis limits for the subplots to the same values.

```
x1 = linspace(0,10,100);
y1 = sin(x1);
ax1 = subplot(2,1,1);
plot(ax1,x1,y1)

x2 = linspace(0,5,100);
y2 = sin(x2);
```

```
ax2 = subplot(2,1,2);
plot(ax2,x2,y2)

axis([ax1 ax2],[0 10 -1 1])
```

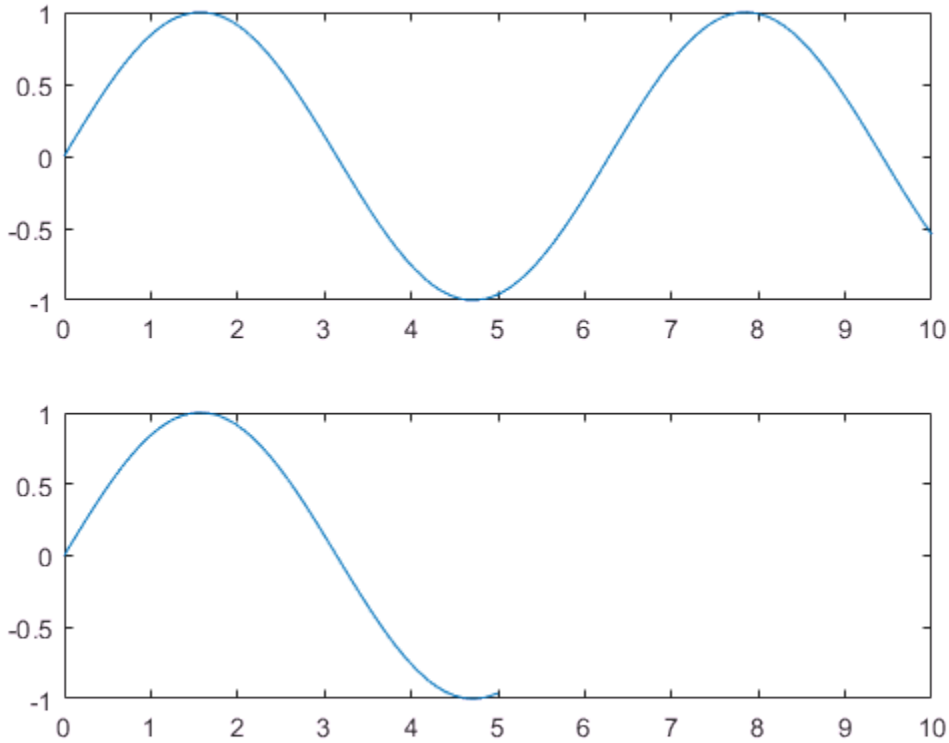

Display Plot Without Axes Background

Plot a surface without displaying the axes lines and background.

```
surf(peaks)
axis off
```

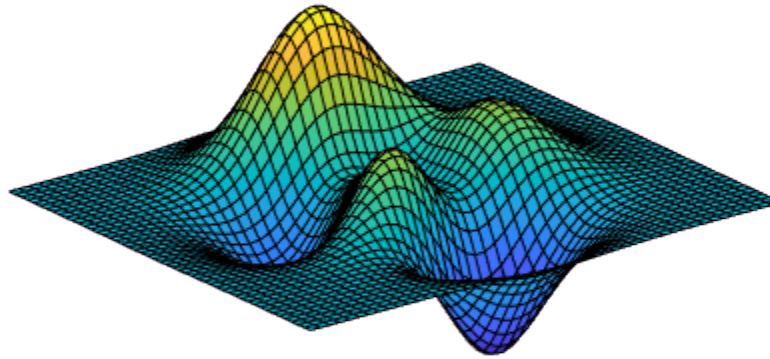

Use Tight Axis Limits and Return Values

Plot a surface. Set the axis limits to equal the range of the data so that the plot extends to the edges of the axes.

```
surf(peaks)
axis tight
```

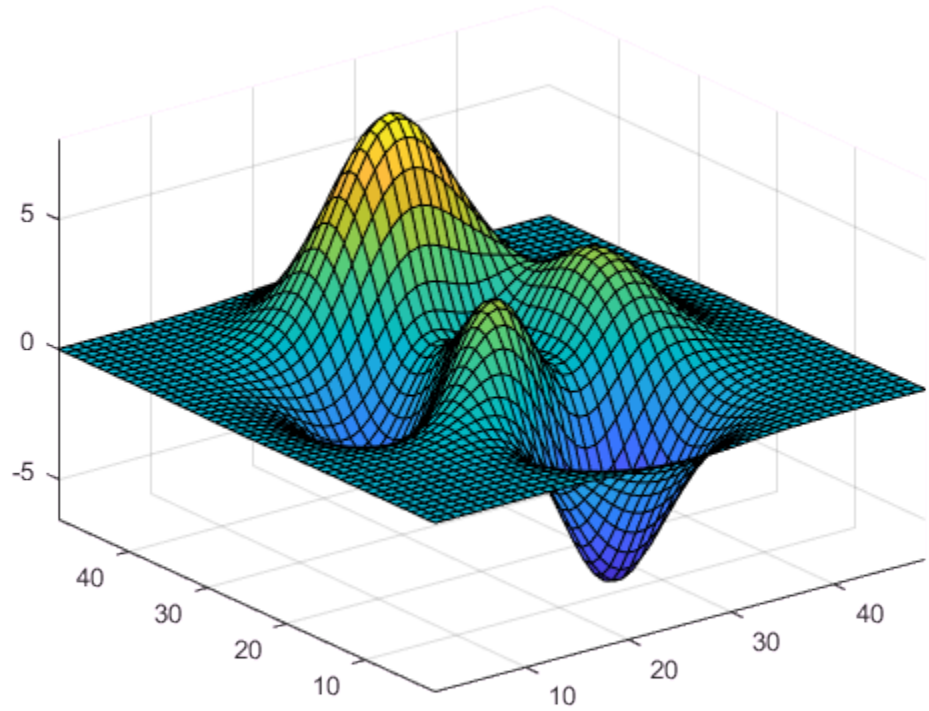

Return the values of the current axis limits.

```
l = axis
```

```
l =

    1.0000   49.0000    1.0000   49.0000   -6.5466    8.0752
```

Change Direction of Coordinate System

Create a checkerboard plot and change the direction of the coordinate system.

First, create the plot using the `summer` colormap. By default, the *x* values increase from left to right and the *y* values increase from bottom to top.

```
C = eye(10);
pcolor(C)
colormap summer
```

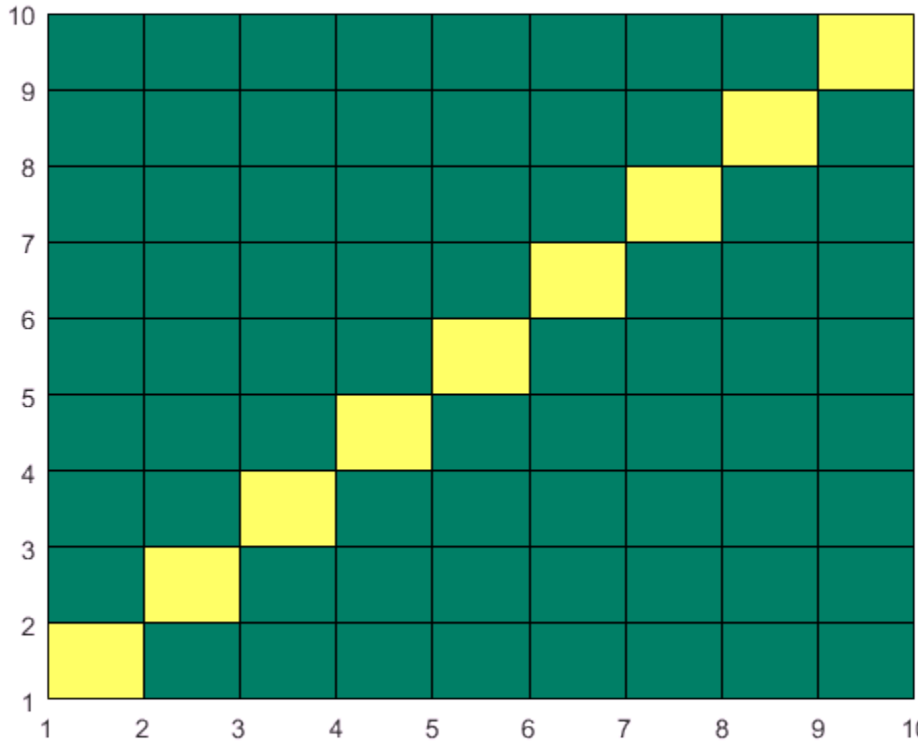

Reverse the coordinate system so that the *y* values increase from top to bottom.

```
axis ij
```

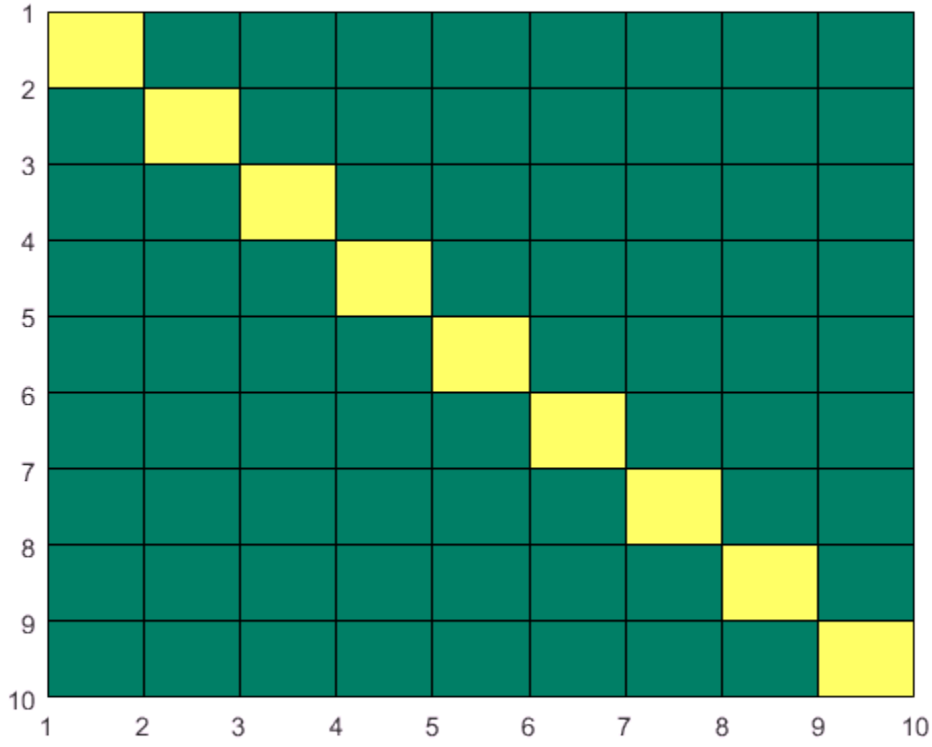

Retain Current Axis Limits When Adding New Plots

Plot a sine wave.

```
x = linspace(0,10);
y = sin(x);
plot(x,y)
```

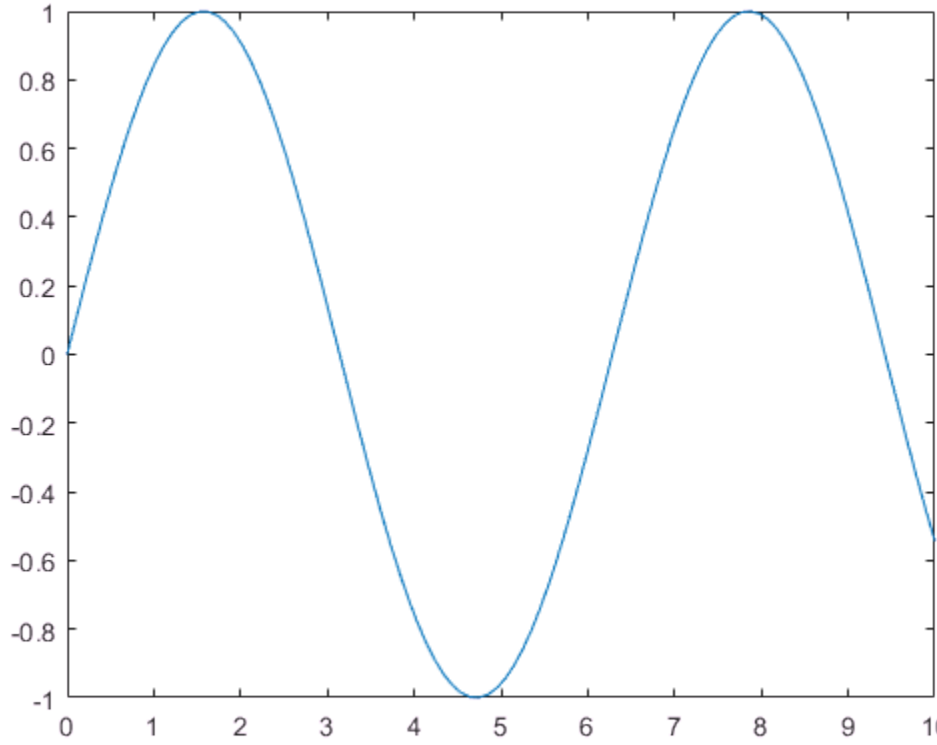

Add another sine wave to the axes using `hold on`. Keep the current axis limits by setting the limits mode to manual.

```
y2 = 2*sin(x);
hold on
axis manual
plot(x,y2)
hold off
```

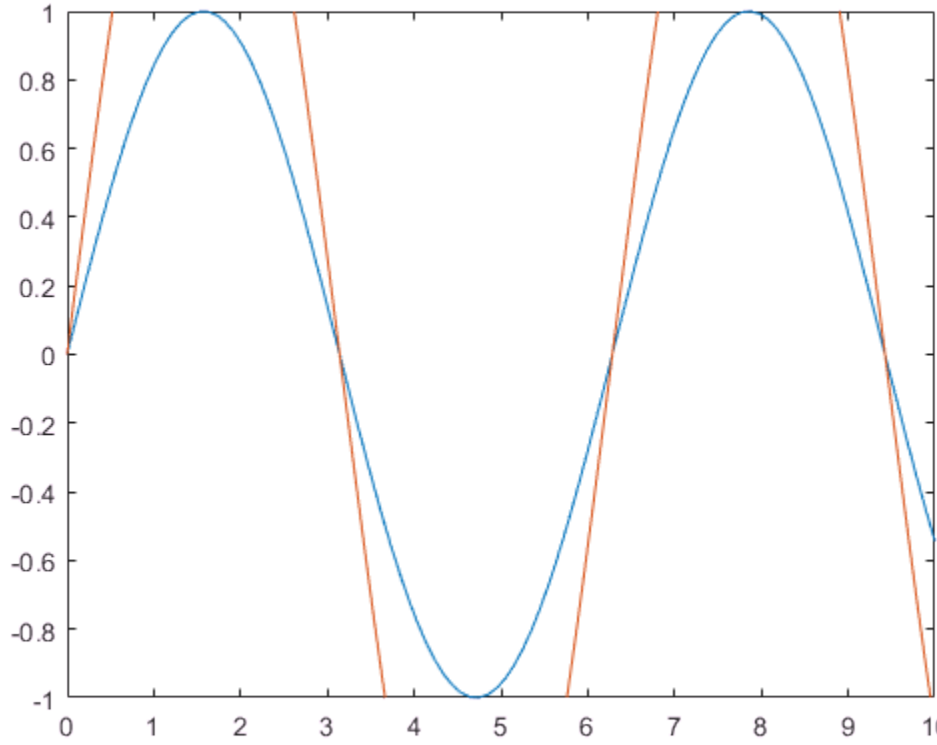

If you want the axes to choose the appropriate limits, set the limits mode back to automatic.

```
axis auto
```

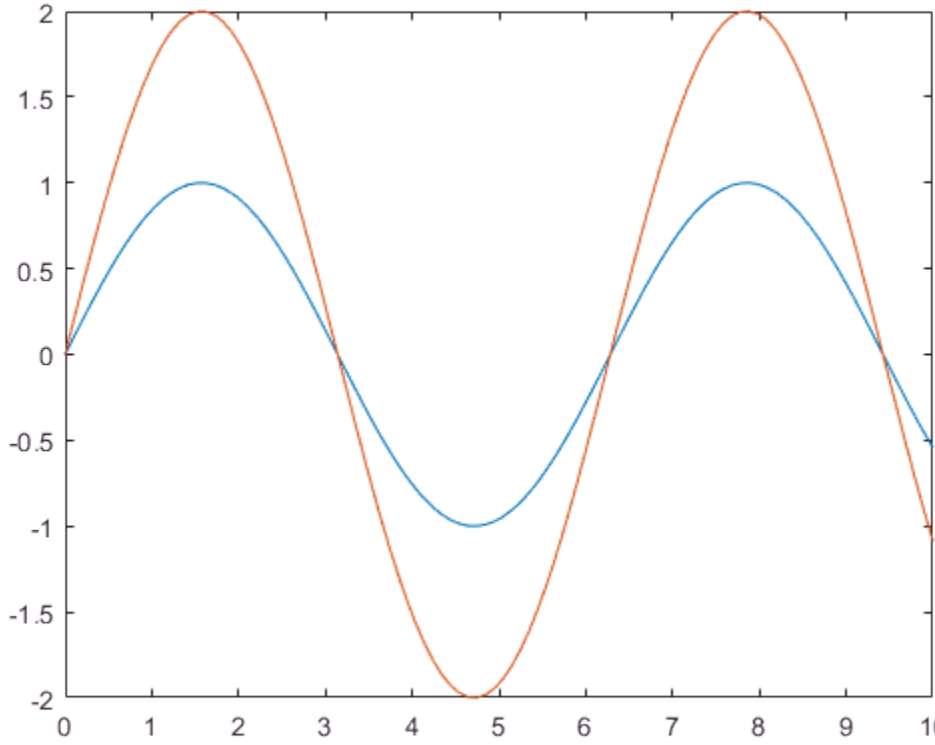

- "Specify Axis Limits"
- "Control Ratio of Axis Lengths and Data Unit Lengths"

Input Arguments

`limits` — Axis limits

four-element vector | six-element vector | eight-element vector

Axis limits, specified as a vector of four, six, or eight elements.

For Cartesian axes, specify the limits in one of these forms:

- `[xmin xmax ymin ymax]` — Set the *x*-axis limits to range from `xmin` to `xmax`. Set the *y*-axis limits to range from `ymin` to `ymax`.
- `[xmin xmax ymin ymax zmin zmax]` — Also set the *z*-axis limits to range from `zmin` to `zmax`.
- `[xmin xmax ymin ymax zmin zmax cmin cmax]` — Also set the color limits. `cmin` is the data value that corresponds to the first color in the colormap. `cmax` is the data value that corresponds to the last color in the colormap.

The XLim, YLim, ZLim, and CLim properties for the `Axes` object store the limit values.

For polar axes, specify the limits in this form:

- `[thetamin thetamax rmin rmax]` — Set the theta-axis limits to range from `thetamin` to `thetamax`. Set the *r*-axis limits to range from `rmin` to `rmax`.

The ThetaLim and RLim properties for the `PolarAxes` object store the limit values.

For partially automatic limits, use `inf` or `-inf` for the limits you want the axes to choose automatically. For example, `axis([-inf 10 0 inf])` lets the axes choose the appropriate minimum *x*-axis limit and maximum *y*-axis limit. It uses the specified values for the maximum *x*-axis limit and minimum *y*-axis limit.

Note: If the *x*-axis, *y*-axis, or *z*-axis displays categorical, datetime, or duration values, then use the `xlim`, `ylim`, and `zlim` functions to set the limits instead.

Example: `axis([0 1 0 1])`

Example: `axis([0 1 0 1 0 1])`

Example: `axis([0 inf 0 inf])`

`mode` — Manual, automatic, or semiautomatic selection of axis limits

`manual` | `auto` | `'auto x'` | `'auto y'` | `'auto z'` | `'auto xy'` | `'auto xz'` | `'auto yz'`

Manual, automatic, or semiautomatic selection of axis limits, specified as one of the values in this table.

Value	Description	Axes Properties That Change
`manual`	Freeze all axis limits at their current values.	Sets `XLimMode`, `YLimMode`, and `ZLimMode` to `'manual'`.

Value	Description	Axes Properties That Change
		If you are working with polar axes, then this option sets `ThetaLimMode` and `RLimMode` to `'manual'`.
`auto`	Automatically choose all axis limits.	Sets `XLimMode`, `YLimMode`, and `ZLimMode` to `'auto'`. If you are working with polar axes, then this option sets `ThetaLimMode` and `RLimMode` to `'auto'`.
`'auto x'`	Automatically choose the *x*-axis limits.	Sets `XLimMode` to `'auto'`.
`'auto y'`	Automatically choose the *y*-axis limits.	Sets `YLimMode` to `'auto'`.
`'auto z'`	Automatically choose the *z*-axis limits.	Sets `ZLimMode` to `'auto'`.
`'auto xy'`	Automatically choose the *x*-axis and *y*-axis limits.	Sets `XLimMode` and `YLimMode` to `'auto'`.
`'auto xz'`	Automatically choose the *x*-axis and *z*-axis limits.	Sets `XLimMode` and `ZLimMode` to `'auto'`.
`'auto yz'`	Automatically choose the *y*-axis and *z*-axis limits.	Sets `YLimMode` and `ZLimMode` to `'auto'`.

Note: You cannot use these options with polar axes.

`style` — Axis limits and scaling

`tight` | `fill` | `equal` | `image` | `square` | `vis3d` | `normal`

Axis limits and scaling, specified as one of these values.

Value	Description	Axes Properties That Change
`tight`	Fit the axes box tightly around the data by setting	`XLimMode`, `YLimMode`, and `ZLimMode` change to `'auto'`. If you are

Value	Description	Axes Properties That Change
	the axis limits equal to the range of the data.	working with polar axes, then `ThetaLimMode` and `RLimMode` change. The limits automatically update to incorporate new data added to the axes. To keep the limits from changing when using `hold on`, use `axis tight manual`.
`equal`	Use the same length for the data units along each axis.	Sets `DataAspectRatio` to `[1 1 1]`, sets `PlotBoxAspectRatio` to `[3 4 4]`, and sets the associated mode properties to manual. Disables the "stretch-to-fill" behavior.
`image`	Use the same length for the data units along each axis and fit the axes box tightly around the data.	Sets `DataAspectRatio` to `[1 1 1]`and sets the associated mode property to manual. Disables the "stretch-to-fill" behavior.
`square`	Use axis lines with equal lengths. Adjust the increments between data units accordingly.	Sets `PlotBoxAspectRatio` to `[1 1 1]` and sets the associated mode property to manual. Disables the "stretch-to-fill" behavior.
`fill`	Enable the "stretch-to-fill" behavior (the default). The lengths of each axis line fill the position rectangle defined in the Position property of the axes.	Sets the plot box aspect ratio mode and data aspect ratio mode properties to auto.
`vis3d`	Freeze the aspect ratio properties.	Sets the plot box aspect ratio mode and data aspect ratio mode properties to manual.

Value	Description	Axes Properties That Change
`normal`	Restore the default behavior.	Sets the plot box aspect ratio mode and data aspect ratio mode properties to auto.

For more information on the plot box aspect ratio and the data aspect ratio, see the PlotBoxAspectRatio and DataAspectRatio properties.

You can combine style options. The options are evaluated from left to right. Subsequent options can overwrite properties set by prior ones.

Note: You cannot use these options with polar axes, except for the `axis tight` and `axis normal` commands.

`ydirection` — y-axis direction

`xy` (default) | `ij`

y-axis direction, specified as one of these values:

- `xy` — Default direction. For axes in a 2-D view, the *y*-axis is vertical with values increasing from bottom to top.
- `ij` — Reverse direction. For axes in a 2-D view, the *y*-axis is vertical with values increasing from top to bottom.

Note: You cannot use these options with polar axes.

`visibility` — Axes lines and background visibility

`on` (default) | `off`

Axes lines and background visibility, specified as either `on` or `off`. Specifying the visibility sets the Visible property of the `Axes` object or `PolarAxes` object to the specified value.

`ax` — Target axes

one or more axes

Target axes, specified as one or more axes. You can specify `Axes` objects or `PolarAxes` objects. If you do not specify the axes, then `axis` sets the limits for the current axes (`gca`).

When you specify the axes, use single quotes around other input arguments that are character vectors.

Example: `axis(ax,'tight')`

Example: `axis(ax,limits)`

Example: `axis(ax,'manual')`

Output Arguments

`lim` — Current limit values

four-element vector | six-element vector

Current limit values, returned as a four-element or six-element vector.

- For Cartesian axes in a 2-D view, `lim` is of the form `[xmin xmax ymin ymax]`. For axes in a 3-D view, `lim` is of the form `[xmin xmax ymin ymax zmin zmax]`. The XLim, YLim, and ZLim properties for the `Axes` object store the limit values.
- For polar axes, `lim` is of the form `[thetamin thetamax rmin rmax]`. The ThetaLim and RLim properties for the `PolarAxes` object store the limit values.

Tips

- If axes do not exist, the `axis` function creates them.
- Use `hold on` to keep plotting functions from overriding preset axis limits.

See Also

See Also

Functions

`caxis` | `grid` | `subplot` | `title` | `xlim` | `ylim` | `zlim`

Properties

Axes Properties | PolarAxes Properties

Topics

"Specify Axis Limits"
"Control Ratio of Axis Lengths and Data Unit Lengths"

Introduced before R2006a

alphaShape

Polygons and polyhedra from points in 2-D and 3-D

Description

An `alphaShape` creates a bounding area or volume that envelops a set of 2-D or 3-D points. You can manipulate the `alphaShape` object to tighten or loosen the fit around the points to create a nonconvex region. You can also add or remove points or suppress holes or regions.

After you create an `alphaShape` object, you can perform geometric queries. For example, you can determine if a point is inside the shape or find the number of regions that make up the shape. You can also calculate useful quantities like area, perimeter, surface area, or volume and plot the shape for visual inspection.

Create Object

Create an `alphaShape` using the `alphaShape` function.

Properties

`Points` — Coordinates of points

matrix

Coordinates of points, specified as a matrix with two or three columns (for 2-D or 3-D point sets). These points are initially used to create the alpha shape, excluding duplicates.

Data Types: `double`

`Alpha` — Alpha radius

nonnegative scalar

Alpha radius, specified as a nonnegative scalar. The alpha radius is the radius of the alpha disk or sphere which sweeps over the points to create the alpha shape.

The default alpha radius is `a = criticalAlpha(shp,'all-points')`, which is the smallest alpha radius that produces an alpha shape enclosing all points. Specify `a = criticalAlpha(shp,'one-region')` to use the smallest alpha radius that produces an alpha shape with only one region.

The extreme values of `Alpha`:

- If `Alpha` is `Inf`, then `alphaShape` produces the convex hull.
- If `Alpha` is `0`, then the resulting `alphaShape` is empty.

Data Types: `double`

`HoleThreshold` — Maximum area (2-D) or volume (3-D) of interior holes or voids to fill in
`0` (default) | finite nonnegative scalar

Maximum area or volume of interior holes or voids to fill in, specified as a finite nonnegative scalar.

- For 2-D, `HoleThreshold` specifies the maximum area of interior holes to fill in.
- For 3-D, `HoleThreshold` specifies the maximum volume of interior voids to fill in. Holes extending completely through the 3-D alpha shape cannot be filled in.

The default value is `0`, so that `alphaShape` does not suppress any holes or voids. The application of the `HoleThreshold` and `RegionThreshold` properties is order-dependent. `alphaShape` fills in holes before suppressing regions.

Data Types: `double`

`RegionThreshold` — Maximum area (2-D) or volume (3-D) of regions to suppress
`0` (default) | finite nonnegative scalar

Maximum area (2-D) or volume (3-D) of regions to suppress, specified as a finite nonnegative scalar.

The default value is `0`, so that `alphaShape` does not suppress any regions. The application of the `HoleThreshold` and `RegionThreshold` properties is order-dependent. `alphaShape` fills in holes before suppressing regions.

Data Types: `double`

Object Functions

alphaSpectrum	Alpha values giving distinct alpha shapes

criticalAlpha	Alpha radius defining a critical transition in the shape
numRegions	Number of regions in alpha shape
inShape	Determine if point is inside alpha shape
alphaTriangulation	Triangulation that fills alpha shape
boundaryFacets	Boundary facets of alpha shape
perimeter	Perimeter of 2-D alpha shape
area	Area of 2-D alpha shape
surfaceArea	Surface area of 3-D alpha shape
volume	Volume of 3-D alpha shape
plot	Plot alpha shape
nearestNeighbor	Determine nearest alpha shape boundary point

Examples

Using alphaShape Objects

This example shows how to change an alpha shape object and compute useful quantities that describe the alpha shape.

Create and plot a set of 2-D points.

```
x = gallery('normaldata',50,1,1);
y = gallery('normaldata',50,1,2);
plot(x,y,'.')
```

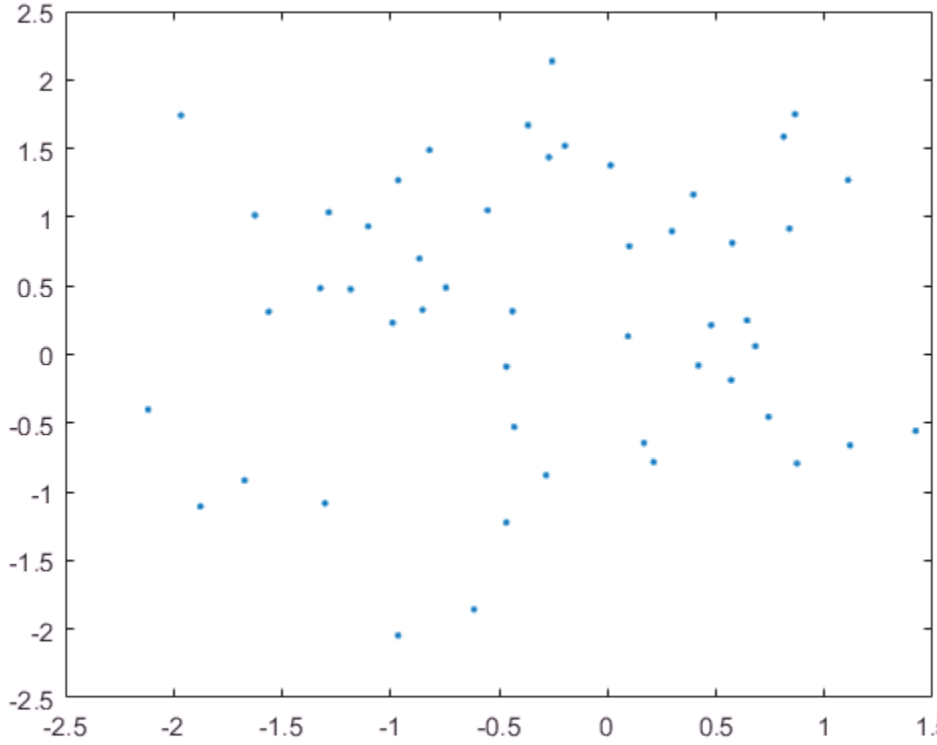

Create and plot an alpha shape using an alpha radius of 0.7.

```
shp = alphaShape(x,y,0.7);
plot(shp)
```

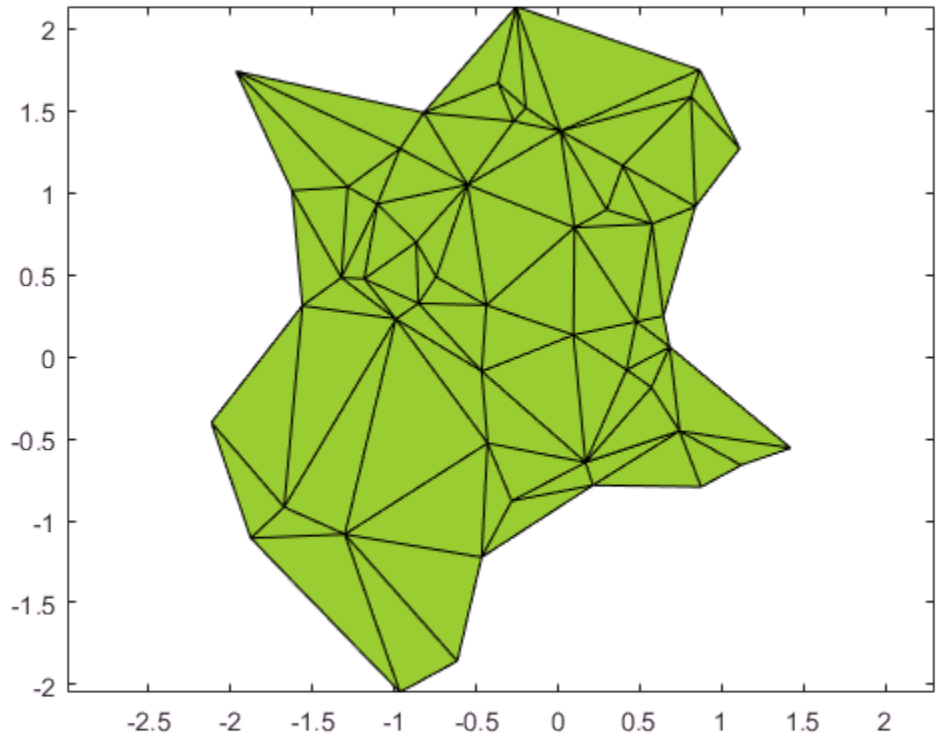

Change the alpha radius to 0.5 to tighten the boundary around the set of points.

```
shp.Alpha = 0.5;
plot(shp)
```

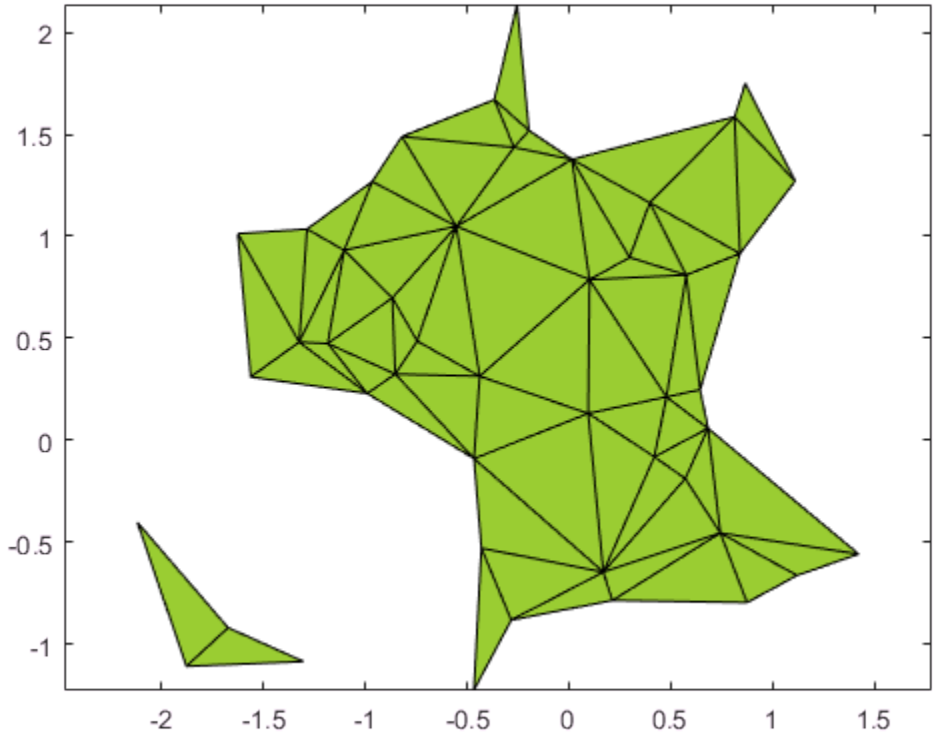

Query the number of regions that make up the new alpha shape.

```
numRegions(shp)
```

```
ans = 2
```

Suppress the smaller of the two regions.

```
shp.RegionThreshold = 1;
plot(shp)
```

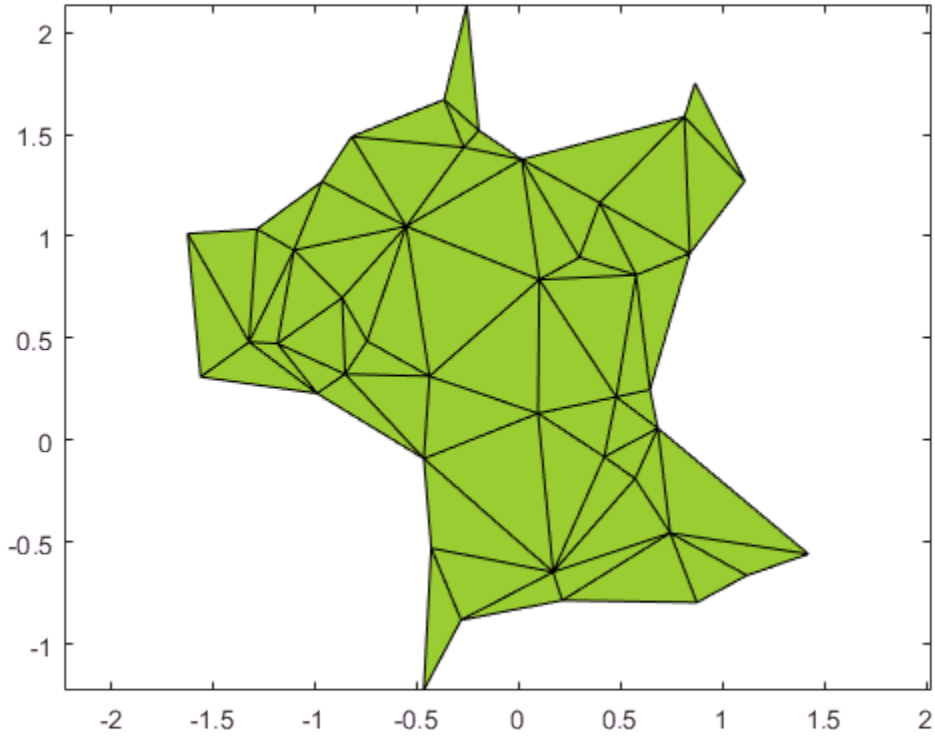

Compute the perimeter and area of the remaining region.

```
regionperims = perimeter(shp)
```

```
regionperims = 11.8543
```

```
regionareas = area(shp)
```

```
regionareas = 4.5407
```

See Also

See Also

`boundary`

Introduced in R2014b

balance

Diagonal scaling to improve eigenvalue accuracy

Syntax

```
[T,B] = balance(A)
[S,P,B] = balance(A)
B = balance(A)
B = balance(A,'noperm')
```

Description

`[T,B] = balance(A)` returns a similarity transformation `T` such that `B = T\A*T`, and `B` has, as nearly as possible, approximately equal row and column norms. `T` is a permutation of a diagonal matrix whose elements are integer powers of two to prevent the introduction of roundoff error. If `A` is symmetric, then `B == A` and `T` is the identity matrix.

`[S,P,B] = balance(A)` returns the scaling vector `S` and the permutation vector `P` separately. The transformation `T` and balanced matrix `B` are obtained from `A`, `S`, and `P` by `T(:,P) = diag(S)` and `B(P,P) = diag(1./S)*A*diag(S)`.

`B = balance(A)` returns just the balanced matrix `B`.

`B = balance(A,'noperm')` scales `A` without permuting its rows and columns.

Examples

This example shows the basic idea. The matrix `A` has large elements in the upper right and small elements in the lower left. It is far from being symmetric.

```
A = [1  100  10000; .01  1  100; .0001  .01  1]
A =
   1.0e+04 *
    0.0001    0.0100    1.0000
    0.0000    0.0001    0.0100
    0.0000    0.0000    0.0001
```

Balancing produces a diagonal matrix T with elements that are powers of two and a balanced matrix B that is closer to symmetric than A.

```
[T,B] = balance(A)
T =
   1.0e+03 *
    2.0480         0         0
         0    0.0320         0
         0         0    0.0003
B =
    1.0000    1.5625    1.2207
    0.6400    1.0000    0.7813
    0.8192    1.2800    1.0000
```

To see the effect on eigenvectors, first compute the eigenvectors of A, shown here as the columns of V.

```
[V,E] = eig(A); V
V =
0.9999        -0.9999            -0.9999
0.0100         0.0059 + 0.0085i   0.0059 - 0.0085i
0.0001         0.0000 - 0.0001i   0.0000 + 0.0001i
```

Note that all three vectors have the first component the largest. This indicates V is badly conditioned; in fact `cond(V)` is `8.7766e+003`. Next, look at the eigenvectors of B.

```
[V,E] = eig(B); V
V =
0.6933        -0.6993            -0.6993
0.4437         0.2619 + 0.3825i   0.2619 - 0.3825i
0.5679         0.2376 - 0.4896i   0.2376 + 0.4896i
```

Now the eigenvectors are well behaved and `cond(V)` is `1.4421`. The ill conditioning is concentrated in the scaling matrix; `cond(T)` is `8192`.

This example is small and not really badly scaled, so the computed eigenvalues of A and B agree within roundoff error; balancing has little effect on the computed results.

Limitations

Balancing can destroy the properties of certain matrices; use it with some care. If a matrix contains small elements that are due to roundoff error, balancing might scale them up to make them as significant as the other elements of the original matrix.

Tips

- Nonsymmetric matrices can have poorly conditioned eigenvalues. Small perturbations in the matrix, such as roundoff errors, can lead to large perturbations in the eigenvalues. The condition number of the eigenvector matrix,

  ```
  cond(V) = norm(V)*norm(inv(V))
  ```

  where

  ```
  [V,T] = eig(A)
  ```

  relates the size of the matrix perturbation to the size of the eigenvalue perturbation. Note that the condition number of `A` itself is irrelevant to the eigenvalue problem.

  Balancing is an attempt to concentrate any ill conditioning of the eigenvector matrix into a diagonal scaling. Balancing usually cannot turn a nonsymmetric matrix into a symmetric matrix; it only attempts to make the norm of each row equal to the norm of the corresponding column.

  Note The MATLAB eigenvalue function, `eig(A)`, automatically balances `A` before computing its eigenvalues. Turn off the balancing with `eig(A,'nobalance')`.

See Also

`eig`

bandwidth

Lower and upper matrix bandwidth

Syntax

```
B = bandwidth(A,type)
```

```
[lower,upper] = bandwidth(A)
```

Description

`B = bandwidth(A,type)` returns the bandwidth of matrix `A` specified by `type`. Specify `type` as `'lower'` for the lower bandwidth, or `'upper'` for the upper bandwidth.

`[lower,upper] = bandwidth(A)` returns the lower bandwidth, `lower`, and upper bandwidth, `upper`, of matrix `A`.

Examples

Find Bandwidth of Triangular Matrix

Create a 6-by-6 lower triangular matrix.

```
A = tril(magic(6))
```

```
A =

    35     0     0     0     0     0
     3    32     0     0     0     0
    31     9     2     0     0     0
     8    28    33    17     0     0
    30     5    34    12    14     0
     4    36    29    13    18    11
```

Find the lower bandwidth of `A` by specifying `type` as `'lower'`. The result is 5 since every diagonal below the main diagonal has nonzero elements.

```
B = bandwidth(A,'lower')
```

```
B = 5
```

Find the upper bandwidth of A by specifying `type` as `'upper'`. The result is 0 since there are no nonzero elements above the main diagonal.

```
B = bandwidth(A,'upper')
```

```
B = 0
```

Find Bandwidth of Sparse Block Matrix

Create a 100-by-100 sparse block matrix.

```
B = kron(speye(25),ones(4));
```

View a 10-by-10 section of elements from the top left of B.

```
full(B(1:10,1:10))
```

```
ans =

     1     1     1     1     0     0     0     0     0     0
     1     1     1     1     0     0     0     0     0     0
     1     1     1     1     0     0     0     0     0     0
     1     1     1     1     0     0     0     0     0     0
     0     0     0     0     1     1     1     1     0     0
     0     0     0     0     1     1     1     1     0     0
     0     0     0     0     1     1     1     1     0     0
     0     0     0     0     1     1     1     1     0     0
     0     0     0     0     0     0     0     0     1     1
     0     0     0     0     0     0     0     0     1     1
```

B has 4-by-4 blocks of ones centered on the main diagonal.

Find both the lower and upper bandwidths of B by specifying two output arguments.

```
[lower,upper] = bandwidth(B)
```

```
lower = 3

upper = 3
```

Input Arguments

A — Input matrix

2-D numeric matrix

Input matrix, specified as a 2-D numeric matrix. A can be either full or sparse.

Data Types: `single` | `double`
Complex Number Support: Yes

`type` — Bandwidth type

`'lower'` | `'upper'`

Bandwidth type, specified as `'lower'` or `'upper'`.

- Specify `'lower'` for the lower bandwidth (below the main diagonal).
- Specify `'upper'` for the upper bandwidth (above the main diagonal).

Data Types: `char`

Output Arguments

B — Lower or upper bandwidth

nonnegative integer scalar

Lower or upper bandwidth, returned as a nonnegative integer scalar.

- If `type` is `'lower'`, then $0 \le B \le$ `size(A,1)-1`.
- If `type` is `'upper'`, then $0 \le B \le$ `size(A,2)-1`.

`lower` — Lower bandwidth

nonnegative integer scalar

Lower bandwidth, returned as a nonnegative integer scalar. `lower` is in the range $0 \le$ `lower` $\le$ `size(A,1)-1`.

`upper` — Upper bandwidth

nonnegative integer scalar

Upper bandwidth, returned as a nonnegative integer scalar. `upper` is in the range $0 \le$ `upper` $\le$ `size(A,2)-1`.

Definitions

Upper and Lower Bandwidth

The upper and lower bandwidths of a matrix are measured by finding the last diagonal (above or below the main diagonal, respectively) that contains nonzero values.

That is, for a matrix A with elements A_{ij}:

- The upper bandwidth B_1 is the smallest number such that $A_{ij} = 0$ whenever $j - i > B_1$.
- The lower bandwidth B_2 is the smallest number such that $A_{ij} = 0$ whenever $i - j > B_2$.

Note that this measurement does not disallow intermediate diagonals in a band from being all zero, but instead focuses on the location of the last diagonal containing nonzeros. By convention, the upper and lower bandwidths of an empty matrix are both zero.

Tips

- Use the `isbanded` function to test if a matrix is within a specific lower and upper bandwidth.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`diag` | `isbanded` | `isdiag` | `istril` | `istriu`

Introduced in R2014a

bar

Bar graph

Syntax

```
bar(y)
bar(x,y)

bar(___,width)
bar(___,style)
bar(___,color)
bar(___,Name,Value)

bar(ax,___)

b = bar(___)
```

Description

`bar(y)` creates a bar graph with one bar for each element in `y`. If `y` is a matrix, then `bar` groups the bars according to the rows in `y`.

`bar(x,y)` draws the bars at the locations specified by `x`.

`bar(___,width)` sets the relative bar width, which controls the separation of bars within a group. Specify `width` as a scalar value. Use this option with any of the input argument combinations in the previous syntaxes.

`bar(___,style)` specifies the style of the bar groups. For example, use `'stacked'` to display each group as one multicolored bar.

`bar(___,color)` sets the color for all the bars. For example, use `'r'` for red bars.

`bar(___,Name,Value)` modifies the bar chart using one or more name-value pair arguments. The settings apply to all bars plotted. For example, use `'EdgeColor','black'` to outline all the bars in black.

`bar(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`b = bar( ___ )` returns one or more `Bar` objects. If `y` is a vector, then `bar` creates one `Bar` object. If `y` is a matrix, then `bar` creates a `Bar` object for each column. Use `b` to make future modifications to the `Bar` objects after they are created.

Examples

Create Bar Graph

```
y = [75 91 105 123.5 131 150 179 203 226 249 281.5];
bar(y)
```

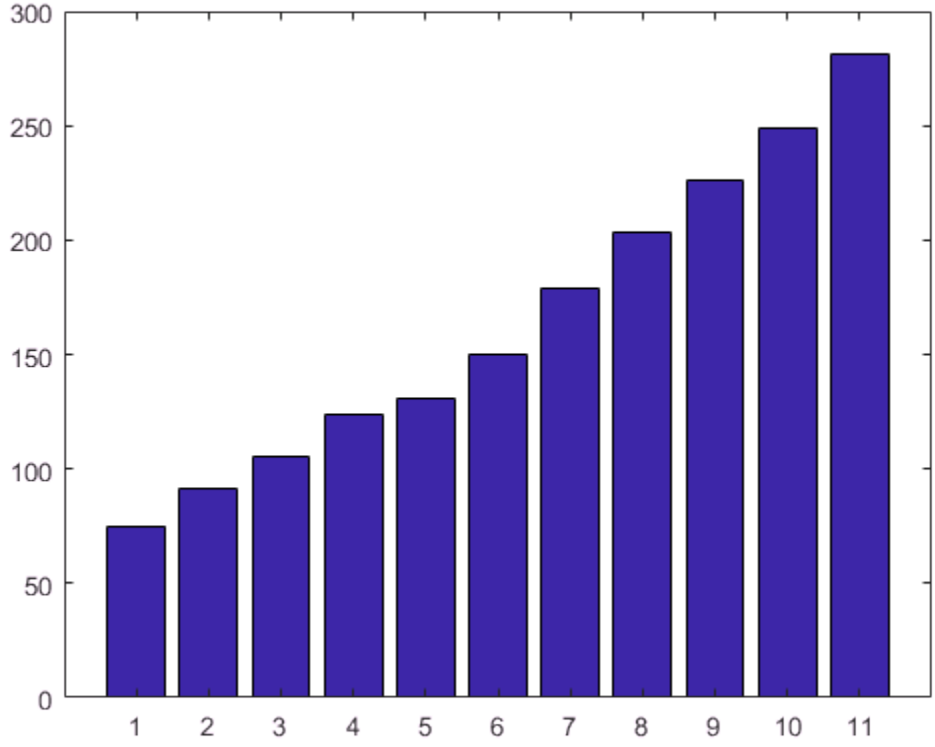

Specify Bar Locations

Specify the bar locations along the *x*-axis.

```
x = 1900:10:2000;
y = [75 91 105 123.5 131 150 179 203 226 249 281.5];
bar(x,y)
```

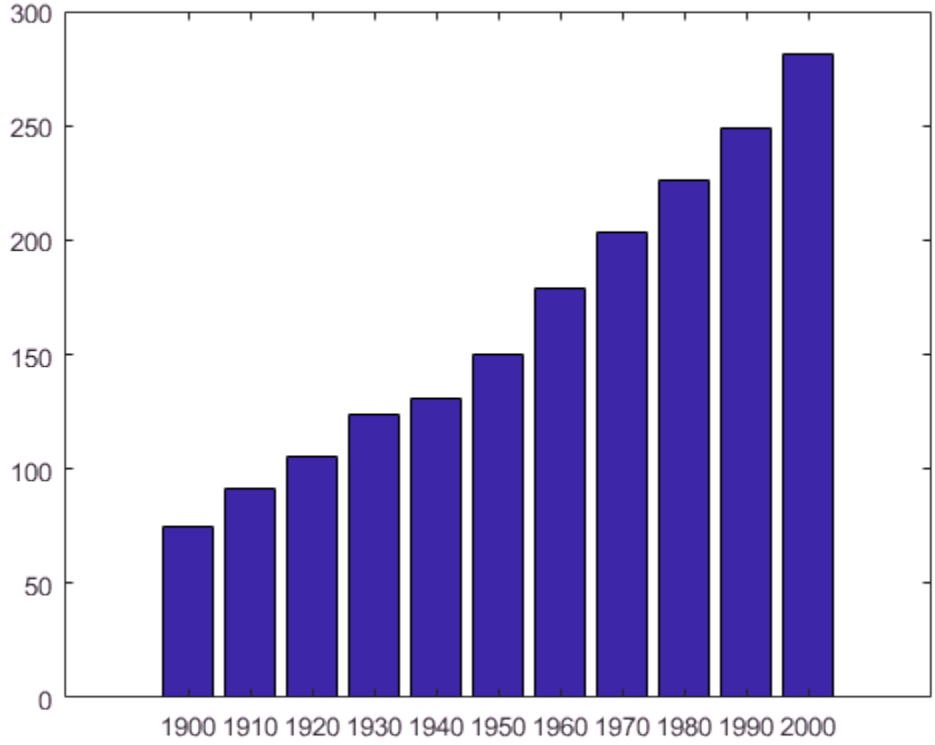

Specify Bar Width

Set the width of each bar to 40 percent of the total space available for each bar.

```
y = [75 91 105 123.5 131 150 179 203 226 249 281.5];
bar(y,0.4)
```

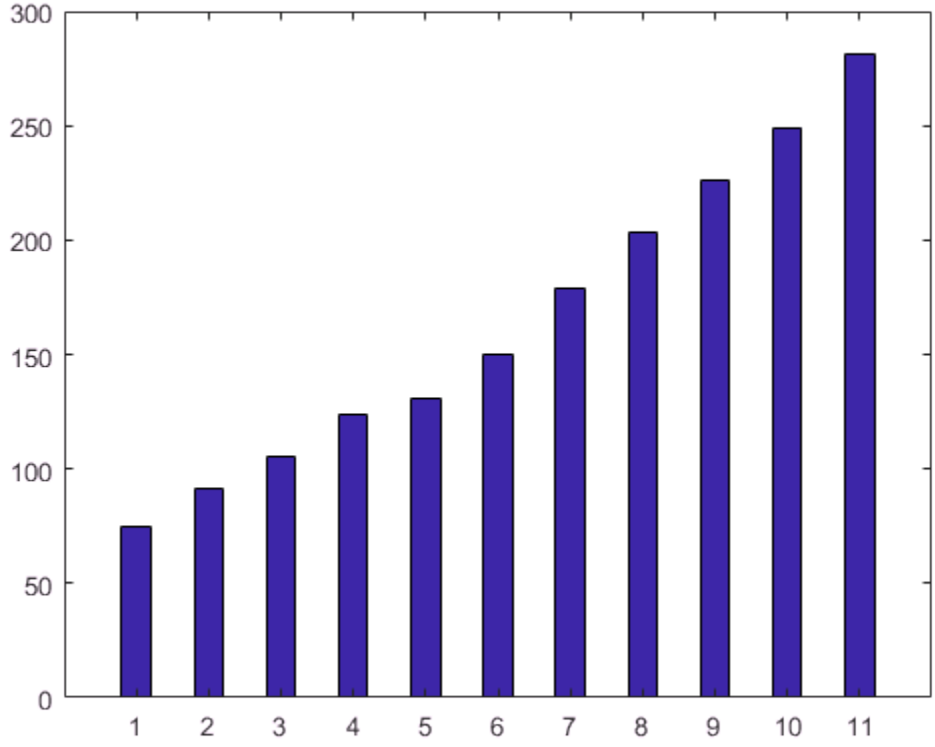

Display Groups of Bars

Display four groups of three bars.

```
y = [2 2 3; 2 5 6; 2 8 9; 2 11 12];
bar(y)
```

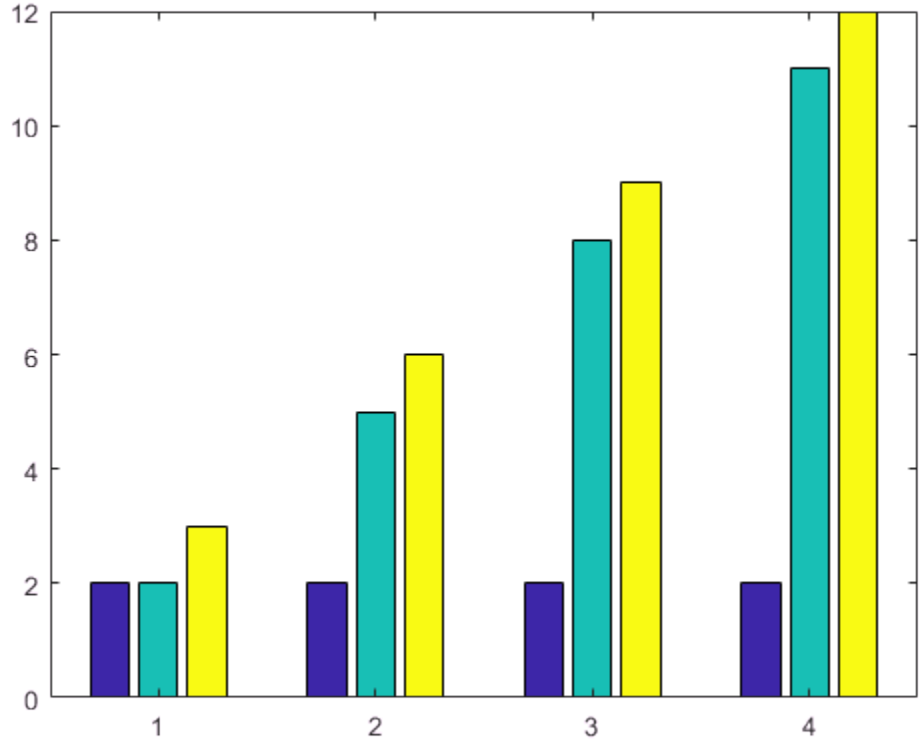

Display Stacked Bars

Display one bar for each row of the matrix. The height of each bar is the sum of the elements in the row.

```
y = [2 2 3; 2 5 6; 2 8 9; 2 11 12];
bar(y,'stacked')
```

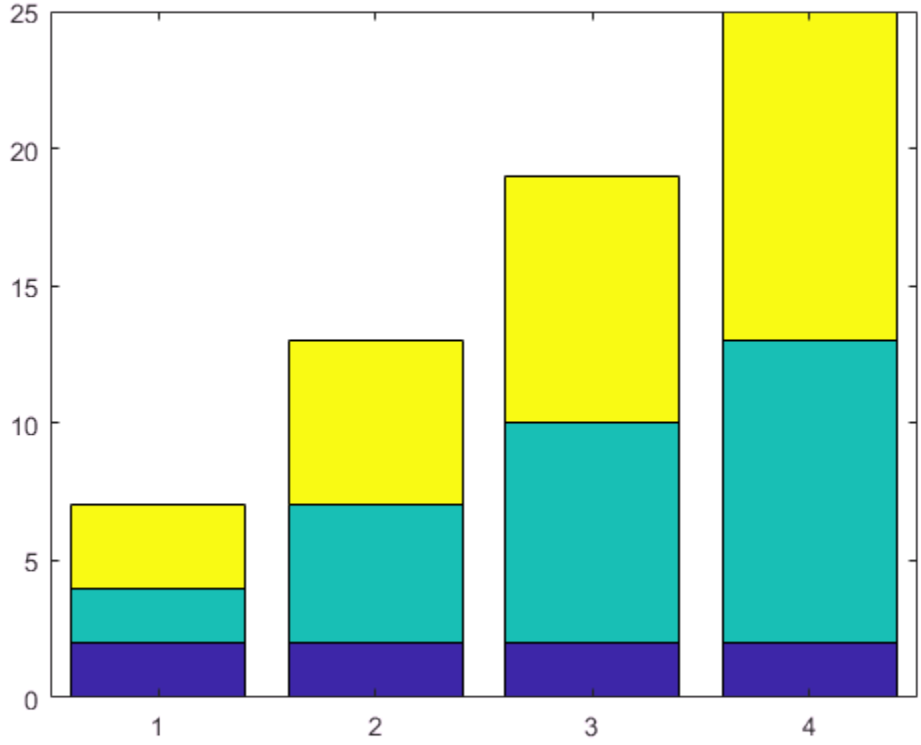

Create Bar Graph with Categorical Data

Create a bar graph with categorical values along the *x*-axis.

```
c = categorical({'apples','oranges','pears'});
prices = [1.23 0.99 2.3];
bar(c,prices)
```

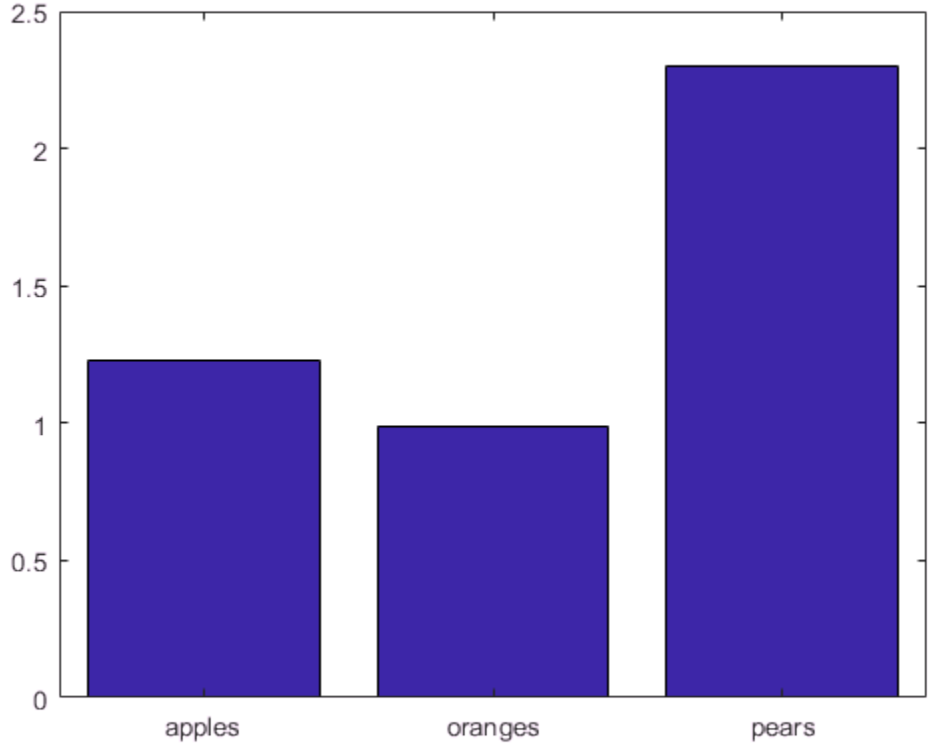

Specify Subplot for Bar Graph

Create a figure with two subplots. In the upper subplot, plot a bar graph. In the lower subplot, plot a stacked bar graph of the same data.

```
y = [1 2 3; 4 5 6];
ax1 = subplot(2,1,1);
bar(ax1,y)

ax2 = subplot(2,1,2);
bar(ax2,y,'stacked')
```

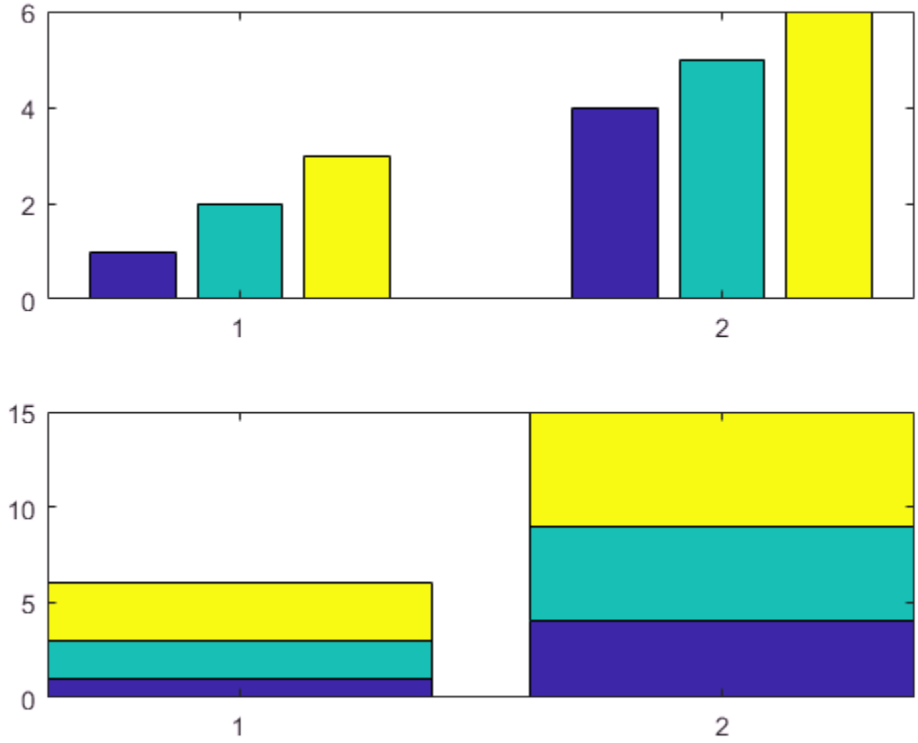

Specify Bar Color

Create a bar graph using red bars.

```
y = [75 91 105 123.5 131 150 179 203 226 249 281.5];
bar(y,'r')
```

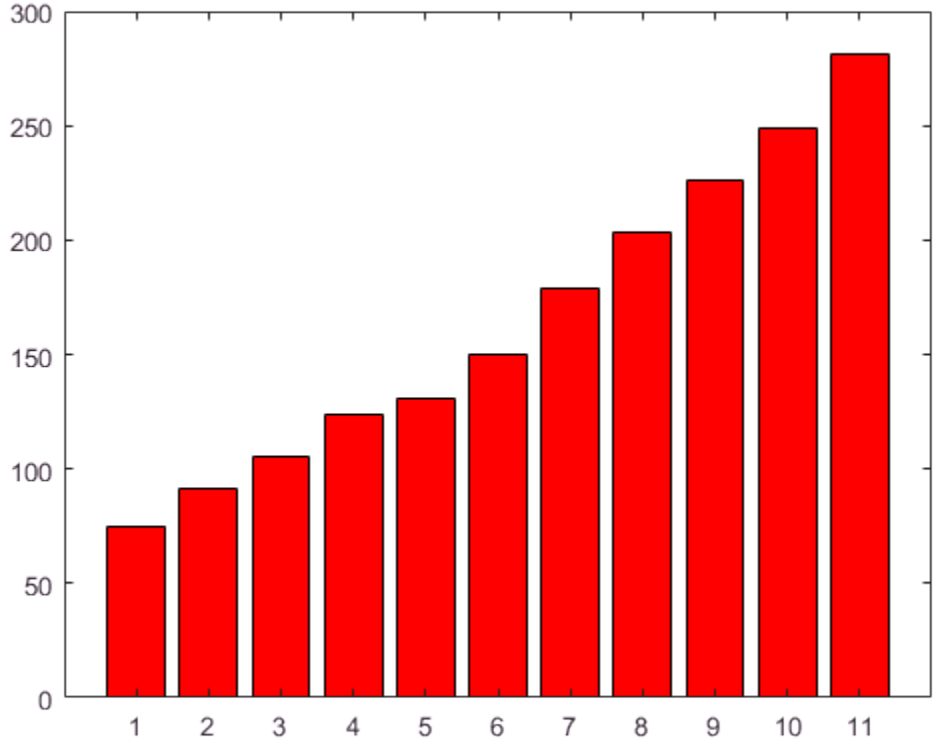

Specify Bar and Outline Colors

Set the bar interior color and outline color using RGB triplets. Set the width of the bar outline.

```
y = [75 91 105 123.5 131 150 179 203 226 249 281.5];
bar(y,'FaceColor',[0 .5 .5],'EdgeColor',[0 .9 .9],'LineWidth',1.5)
```

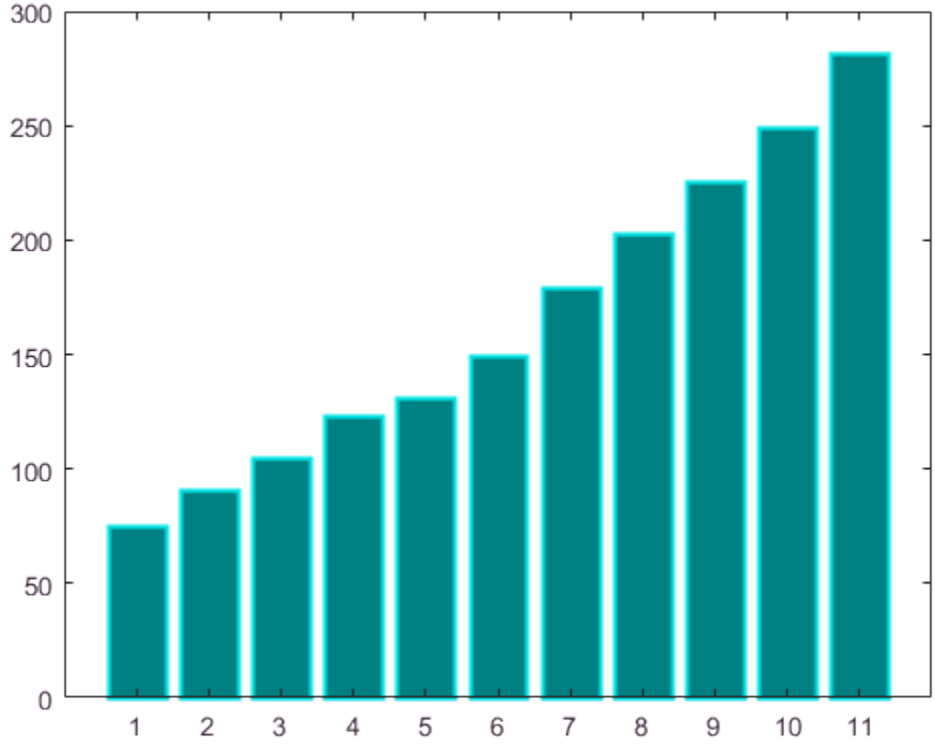

Change Properties for Specific Bar Series

Create a bar graph with a three-column matrix input and return the three bar series objects. `bar` creates one bar series for each column in the matrix.

```
y = [2 4 6; 3 4 5];
b = bar(y);
```

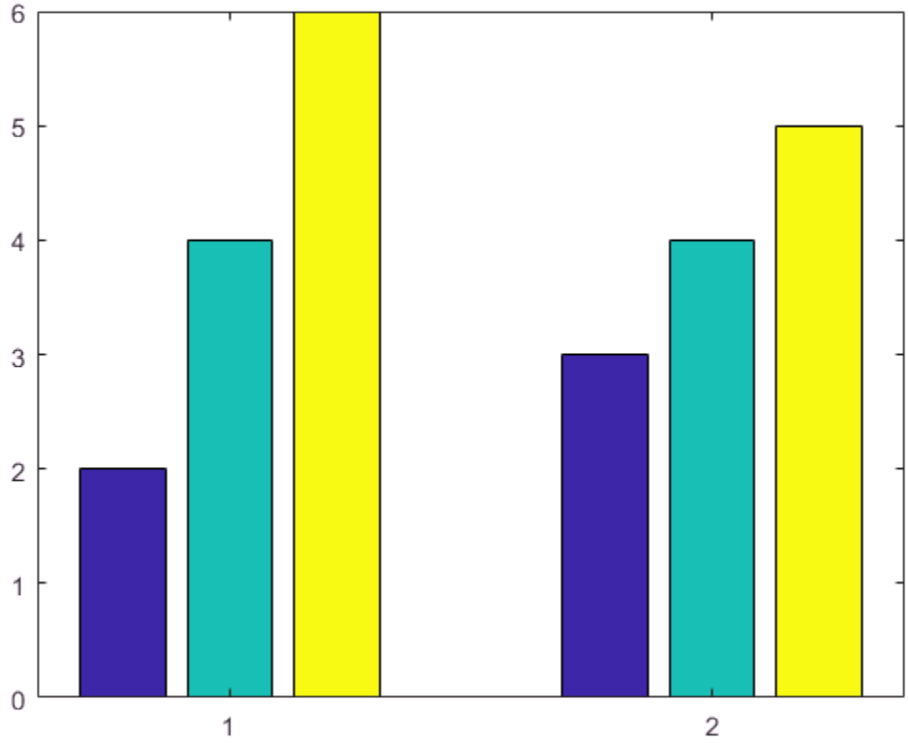

Change properties for a specific bar series by indexing into the object array. For example, change properties of the bars representing the second column of y using `b(2)`. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
b(2).LineWidth = 2;
b(2).EdgeColor = 'red';
```

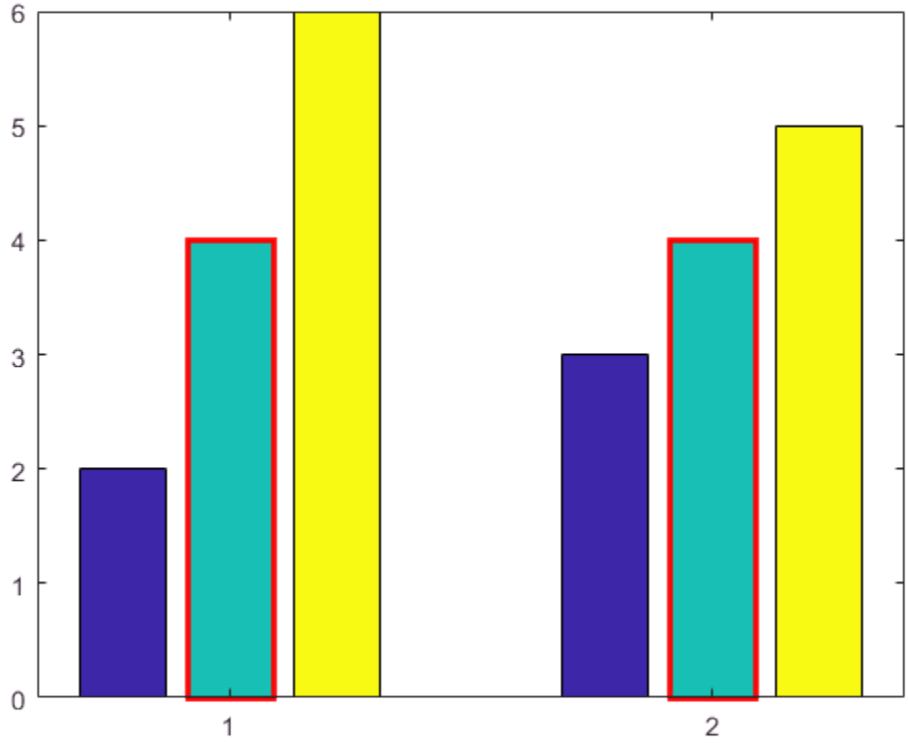

- "Modify Baseline of Bar Graph"
- "Overlay Bar Graphs"
- "Plot Dates and Durations"
- "Plot Categorical Data"

Input Arguments

x — *x* values
vector | matrix

x values, specified as a vector or a matrix. If `x` and `y` are both vectors, then they must be equal length. If `x` and `y` are both matrices, then they must be equal size. If `x` is a vector and `y` is a matrix, then the length of `x` must equal the number of rows in `y`.

The *x* values do not have to be in order, but they cannot contain duplicate values. If `x` is a matrix, then it cannot contain duplicate values across columns.

Example: `1:10`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`y` — *y* values

vector | matrix

y values, specified as a vector or a matrix.

- If `y` is a vector, then `bar` draws one bar for each element. The `bar` function treats all vectors as column vectors.
- If `y` is a matrix, then `bar` groups the bars according to the rows in `y`.

Example: `[10 8 5 7 3 9 1]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`width` — Bar width

`0.8` (default) | scalar

Bar width, specified as a fraction of the total space available for each bar. The default of `0.8` means the bar width is 80% of the space from the previous bar to the next bar, with 10% of that space on each side.

If the width is `1`, then the bars within a group touch one another.

Example: `0.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`style` — Bar group style

`'grouped'` (default) | `'stacked'` | `'hist'` | `'histc'`

Bar group style, specified by one of these values.

Style	Purpose
`'grouped'`	Display one group for each row in `y`. • If `y` is an m-by-n matrix, then `bar` displays m groups of n vertical bars, where m is the number of rows and n is the number of columns in `y`. • If `y` is a vector of length n, then `bar` displays one group of n bars. The `bar` function treats all vectors as column vectors.
`'stacked'`	Display one bar for each row in `y`. • If `y` is an m-by-n matrix, then `bar` displays m bars where each bar height is the sum of the elements in the row. Each bar is multicolored. Colors correspond to distinct elements and show the relative contribution each row element makes to the total sum. • If `y` is a vector of length n, then `bar` displays n bars. The `bar` function treats all vectors as column vectors.
`'histc'`	Display the graph in histogram format, in which bars touch one another.
`'hist'`	Display the graph in histogram format, but center each bar over the x-ticks, rather than making bars span x-ticks as the `histc` option does.

`color` — Bar color

`'b' | 'r' | 'g' | 'c' | 'm' | 'y' | 'k' | 'w'`

Bar color, specified as one of the colors in this table.

Color	Color
`'b'`	Blue

Color	Color
`'r'`	Red
`'g'`	Green
`'c'`	Cyan
`'m'`	Magenta
`'y'`	Yellow
`'k'`	Black
`'w'`	White

`ax` — Axes object
axes object

Axes object. If you do not specify an axes, then `bar` uses the current axes for the bar graph.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The `Bar` properties listed here are only a subset. For a complete list, see Bar Properties.

Note: You cannot specify `Name,Value` pairs when using the `'hist'` or `'histc'` bar group style options.

Example: `'EdgeColor','g'` specifies a green outline around the bars.

`'EdgeColor'` — Bar outline color
`[0 0 0]` (default) | `'flat'` | `'none'` | RGB triplet | character vector of color name

Bar outline color, specified as one of these values:

- `'flat'` — Colors based on axes colormap. To change the colormap, use the `colormap` function.

- `'none'` — No color, which makes the outlines invisible.
- RGB triplet or character vector of color name — Specify a custom color. The default RGB triplet value of `[0 0 0]` corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

If you create a bar chart with more than 150 bars along the *x*-axis (or *y*-axis for a horizontal bar chart) and you do not specify the edge color, then the `EdgeColor` property is set to `'none'`. To show the edges, set the `EdgeColor` property to a color value, such as `'k'`.

`'FaceColor'` — Bar fill color

`'flat'` (default) | `'none'` | RGB triplet | character vector of color name

Bar fill color, specified as one of these values:

- `'flat'` — Colors based on the axes colormap.
- `'none'` — No color, which makes the fill invisible.
- RGB triplet or character vector of a color name — Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

`'BaseValue'` — Baseline value

0 (default) | numeric scalar value

Baseline value, specified as a numeric scalar value.

The baseline value that you specify applies to either the *x*-axis or the *y*-axis depending on the bar chart orientation. If you change the orientation of the bar chart from vertical to horizontal, or vice versa, the baseline value might change. Set the `BaseValue` property after setting the `Horizontal` property.

`'LineStyle'` — Line style of bar outlines

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style of bar outlines, specified as one of the line styles in this table.

Line Style	Line Style	Resulting Line
'-'	Solid line	
'--'	Dashed line	
':'	Dotted line	
'-.'	Dash-dotted line	
'none'	No line	No line

`'LineWidth'` — Width of bar outlines

0.5 (default) | positive value

Width of bar outlines, specified as a positive value in point units. One point equals 1/72 inch.

Example: `1.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`b` — `Bar` objects
`Bar` objects

`Bar` objects. Each object comprises a set of bars that have the same color. Use the elements in `b` to access and modify properties of a specific `Bar` object after it has been created.

Tips

- The default bar colors are based on the axes colormap. You can change the axes colormap using the `colormap` function.

See Also

See Also

Functions
`bar3` | `bar3h` | `barh` | `histogram` | `hold` | `stairs`

Properties
Bar Properties

Topics
"Modify Baseline of Bar Graph"
"Overlay Bar Graphs"
"Plot Dates and Durations"

"Plot Categorical Data"

External Websites

MATLAB Plot Gallery

Introduced before R2006a

barh

Plot bar graph horizontally



Syntax

```
barh(y)
barh(x,y)
barh(...,width)
barh(...,style)
barh(...,'bar_color')
barh(...,'PropertyName',PropertyValue,...)
barh(ax,...)
b = barh(...)
```

Description

A `barh` graph displays the values in a vector or matrix as horizontal bars.

`barh(y)` draws one horizontal bar for each element in `y`. If `y` is a matrix, `barh` groups the bars produced by the elements in each row. The *y*-axis scale ranges from 1 up to `length(y)` when `y` is a vector, and `1` to `size(y,1)`, which is the number of rows, when `y` is a matrix. The values in `y` can be numeric or duration values.

`barh(x,y)` draws a bar for each element in `y` at locations specified in `x`, where `x` is a vector defining locations along the *y*-axis. The location values can be nonmonotonic, but cannot contain duplicate values. If `y` is a matrix, `barh` groups the elements of each row in `y` at corresponding locations in `x`. The values in `x` can be numeric, datetime, duration, or categorical values.

`barh(...,width)` sets the relative bar width and controls the separation of bars within a group. The default `width` is `0.8`, so if you do not specify `x`, the bars within a group

have a slight separation. If `width` is `1`, the bars within a group touch one another. The value of `width` must be a scalar.

`barh(...,style)` specifies the style of the bars. Specify `style` as one of these values:

- `'grouped'` displays *m* groups of *n* bars, where *m* is the number of rows and *n* is the number of columns in `y`. Each group contains one bar per column in `y`. This is the default value.
- `'stacked'` displays one bar for each row in `y`. The bar length is the sum of the elements in the row. Each bar is multicolored, with colors corresponding to distinct elements and showing the relative contribution each row element makes to the total sum. The `barh` function treats all vectors as column vectors. If `y` is a vector of length *n*, then `barh` displays *n* bars.
- `'histc'` displays the graph in histogram format, in which bars touch one another.
- `'hist'` also displays the graph in histogram format, but centers each bar over the tick value, rather than making bars span the tick values as the `histc` option does.

Note: When you use either the `hist` or `histc` option, you cannot also use parameter/value syntax. These two options create `Patch` objects rather than `Bar` objects.

`barh(...,'bar_color')` displays all bars using the color specified by the single-letter abbreviation `'r'`, `'g'`, `'b'`, `'c'`, `'m'`, `'y'`, `'k'`, or `'w'`.

`barh(...,'PropertyName',PropertyValue,...)` sets the named property or properties to the specified values. You cannot specify properties when `hist` or `histc` options are used. See Bar Properties for more information.

`barh(ax,...)` plots into the axes `ax` instead of into the current axes (`gca`).

`b = barh(...)` returns a vector of `Bar` objects. When `y` is a matrix, `barh` creates one `Bar` object per column in `y`. Each `Bar` object comprises a set of bars that have the same color. Use `b` to change properties for all bars in a `Bar` object.

Examples

Horizontal Bar Graph of Single Data Series

Create a horizontal bar graph of vector data.

```
y = [57,91,105,123,131,150,...
     170,203,226.5,249,281.4];
figure
barh(y)
```

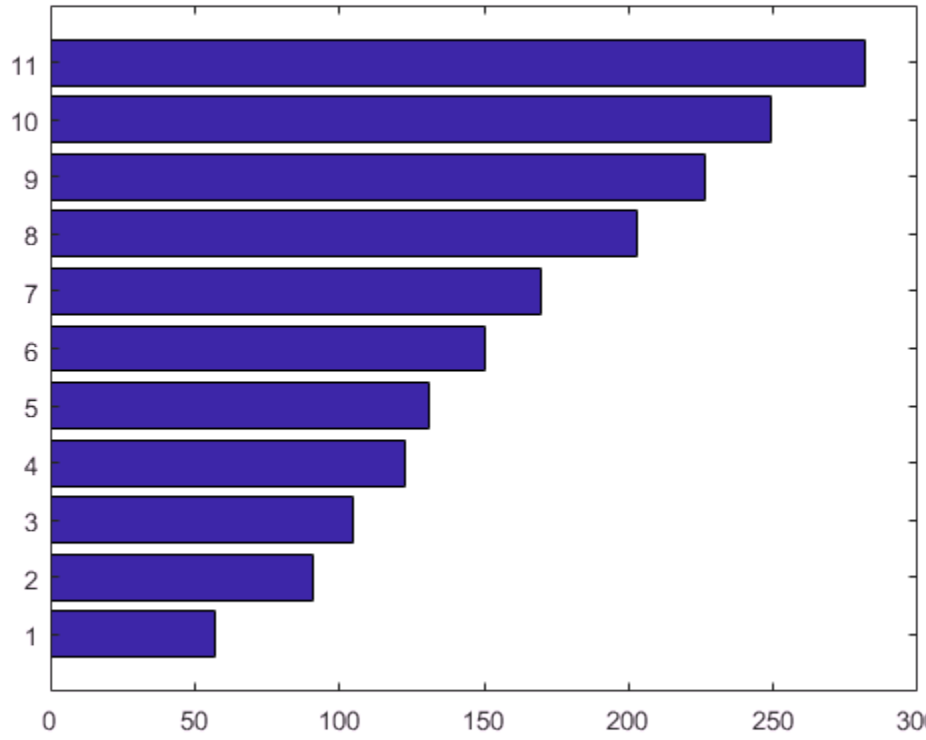

`barh` draws one horizontal bar for each element in `y`.

Specify Width for Horizontal Bar Graph

Specify the bar width to 0.4.

```
y = [57,91,105,123,131,150,...
     170,203,226.5,249,281.4];
```

```
figure;
width = 0.4;
barh(y,width);
```

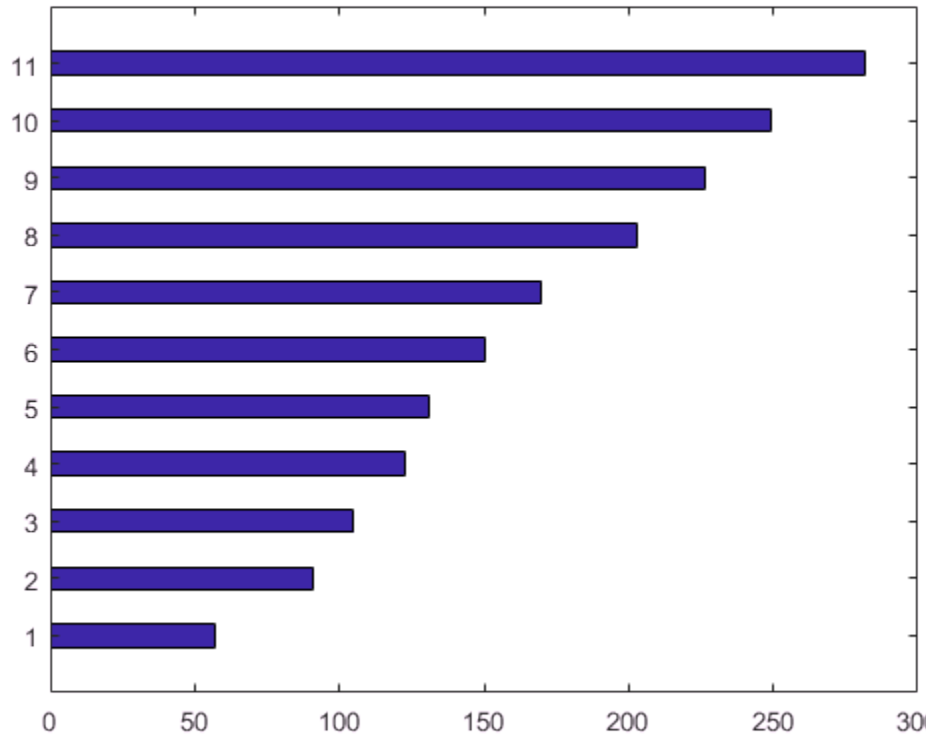

Specify Style for Horizontal Bar Graph

Create a figure with four subplots. In each subplot, create a horizontal bar graph using a different style option for each graph.

```
x = [2,4];
y = [1,2,3,4;...
     5,6,7,8];

figure;
```

```
subplot(2,2,1);
barh(x,y,'grouped'); % groups by row
title('Grouped Style')

subplot(2,2,2);
barh(x,y,'stacked'); % stacks values in each row together
title('Stacked Style')

subplot(2,2,3);
barh(x,y,'hist'); % centers bars over x values
title('hist Style')

subplot(2,2,4);
barh(x,y,'histc'); % spans bars over x values
title('histc Style')
```

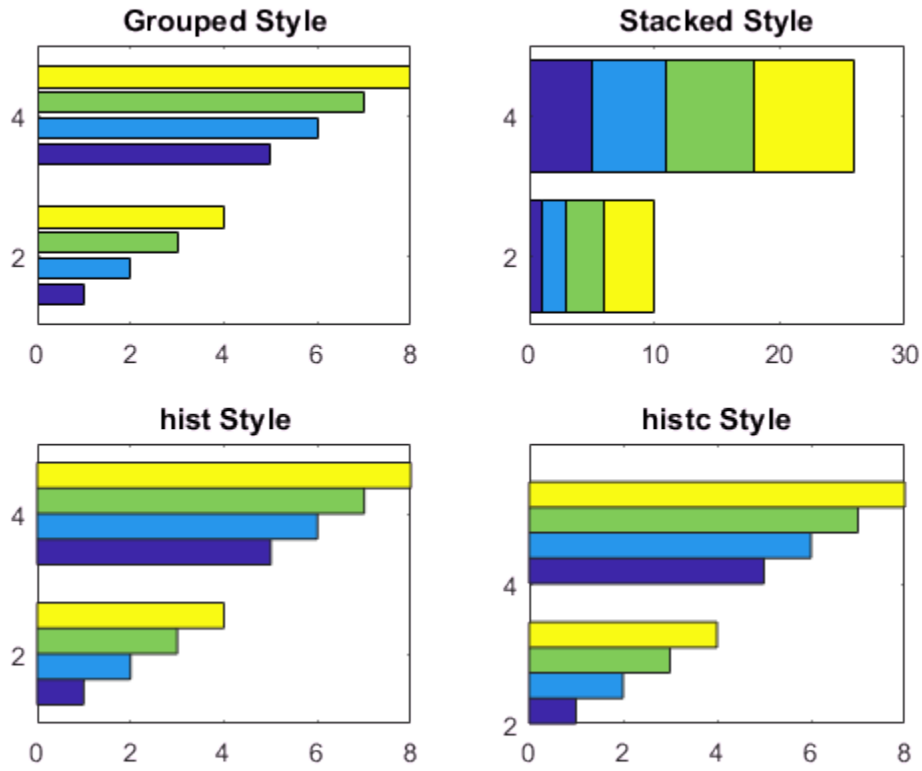

Specify Color for Horizontal Bar Graph

Create a horizontal bar graph and change the color of the bars to red.

```
y = [57,91,105,123,131,150,...
     170,203,226.5,249,281.4];
figure
barh(y,'r')
```

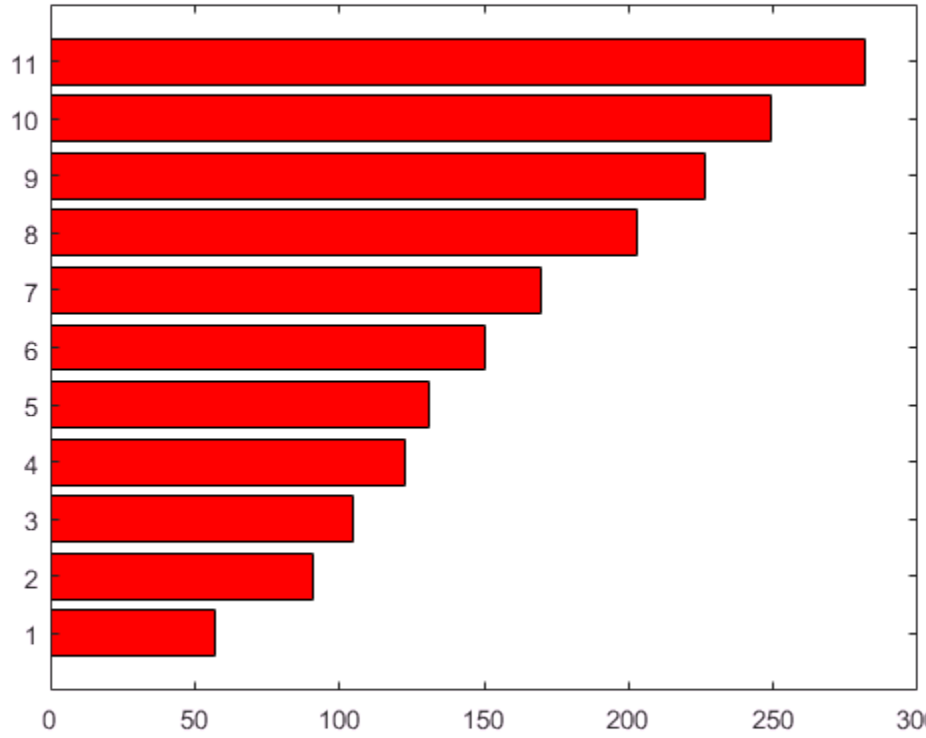

Horizontal Bar Graph of Categorical Data

Create a horizontal bar graph with categorical values along the *y*-axis.

```
c = categorical({'apples','oranges','pears'});
prices = [1.23 0.99 2.3];
barh(c,prices)
```

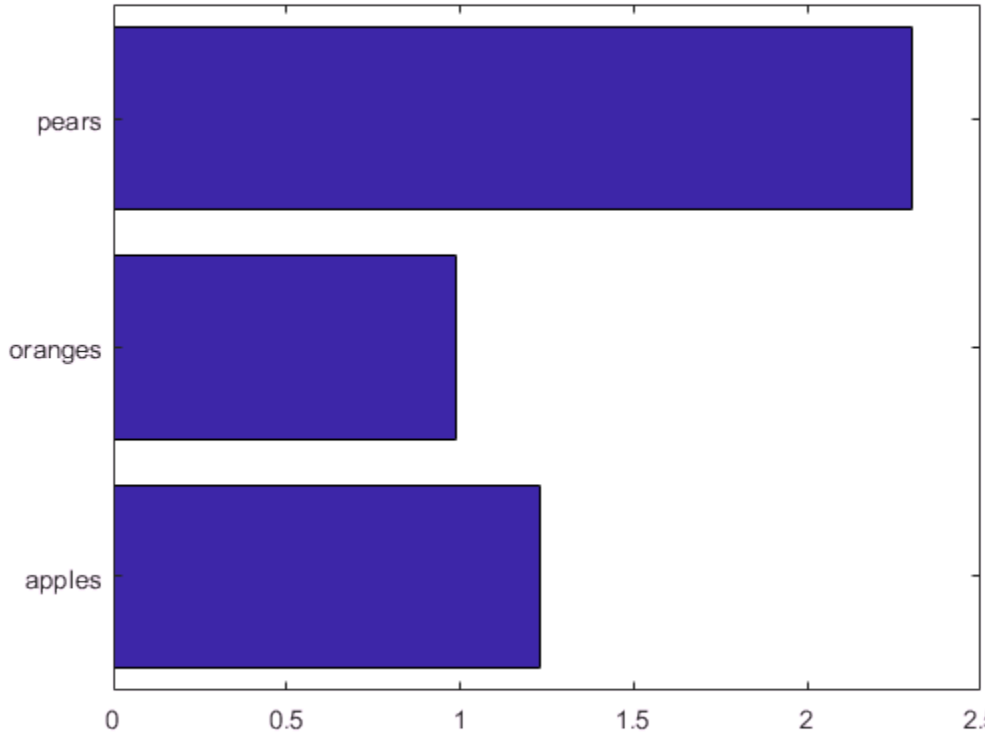

Specify Bar Properties Using Name-Value Pairs

Create a horizontal bar graph and set the line width to 2. Use RGB triplets to set the face color and edge color for the bars.

```
y = [57,91,105,123,131,150,...
     170,203,226.5,249,281.4];

figure
barh(y,'FaceColor',[0,0.5,0.5],...
       'EdgeColor',[0,0,0.9],...
```

```
        'LineWidth',2)
```

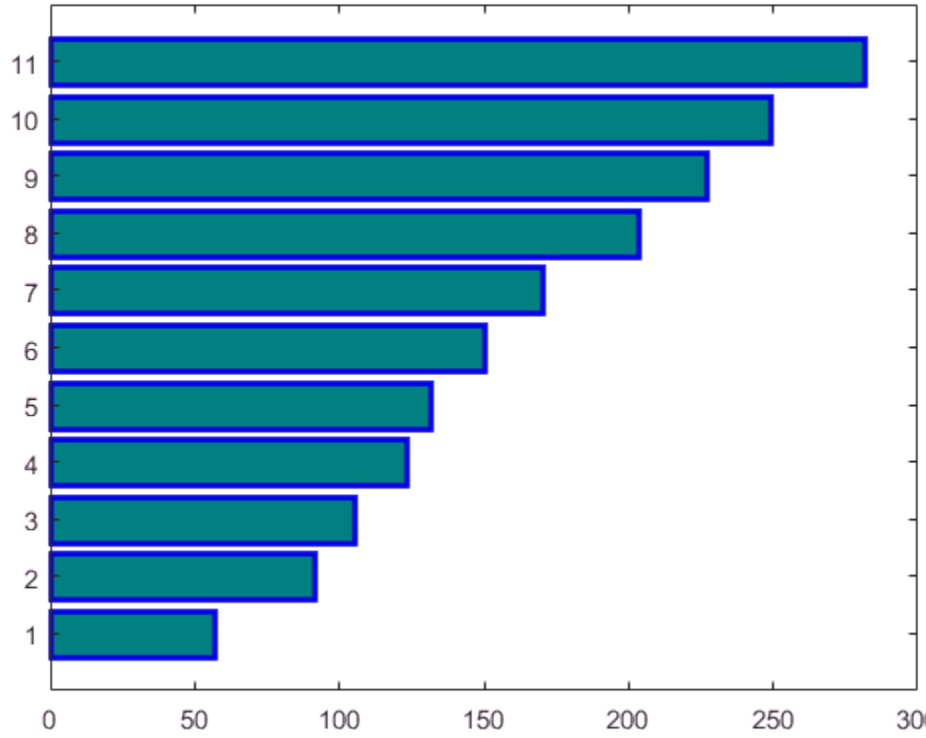

Specify Horizontal Bar Locations

Define x and y as vectors of data.

```
x = 1900:10:2000;
y = [57,91,105,123,131,150,...
     170,203,226.5,249,281.4];
```

Create a horizontal bar graph of the data in y. Use x to specify the bar locations along the *y*-axis.

```
figure
barh(x,y)
```

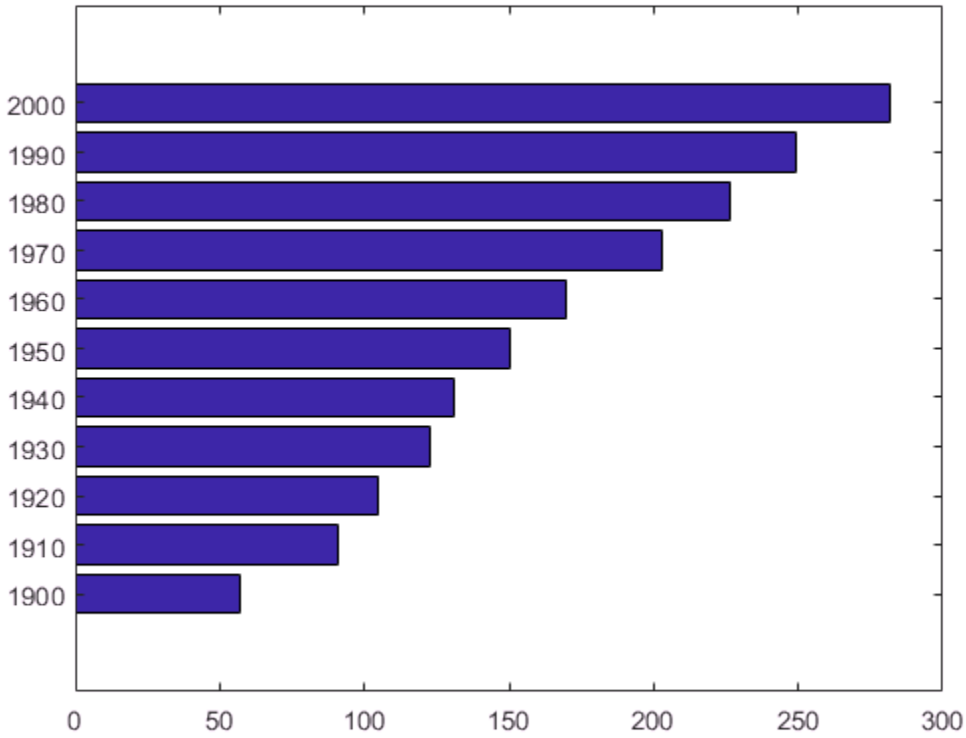

Horizontal Bar Graph of Matrix Data

Load the data set `count.dat`, which returns a three-column matrix, `count`. Store `y` as the first six rows of `count`.

```
load count.dat
y = count(1:6,:);
```

Create a horizontal bar graph of matrix `y`.

```
figure
barh(y)
```

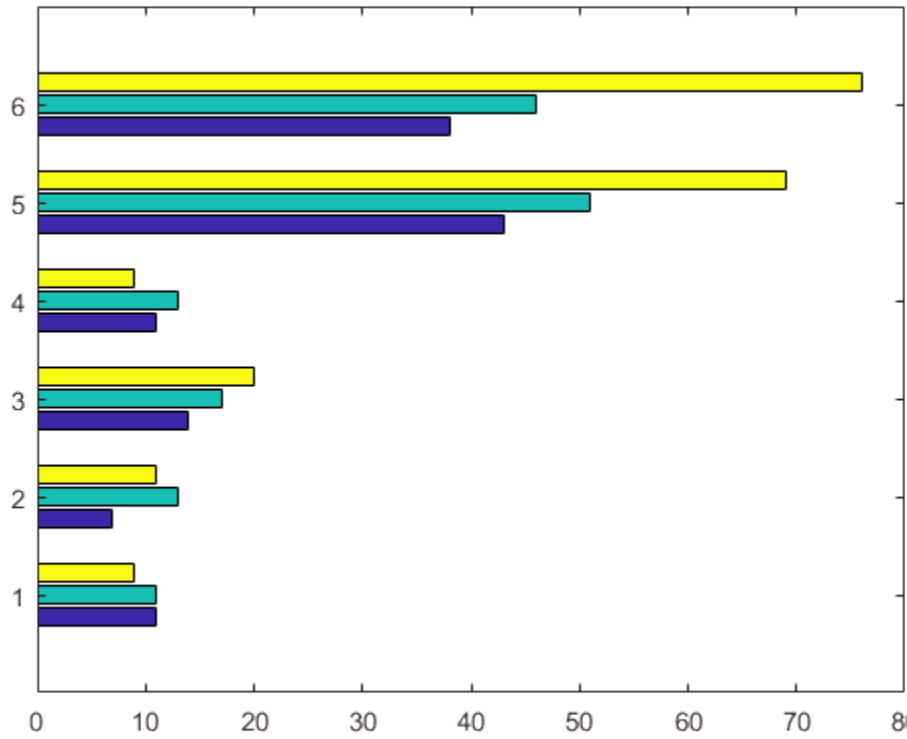

By default, `barh` groups the bars by row.

Specify Different Properties For Each Bar Series

Load the data set, `count.dat`, that returns a three-column matrix, `count`. Define `y` as the first four rows of count.

```
load count.dat
y = count(1:4,:);
```

Create a horizontal bar graph of `y` using a dotted line style. Return the three bar series handles. `barh` creates a bar series for each column in `y`.

```
h = barh(y,'LineStyle',':');
```

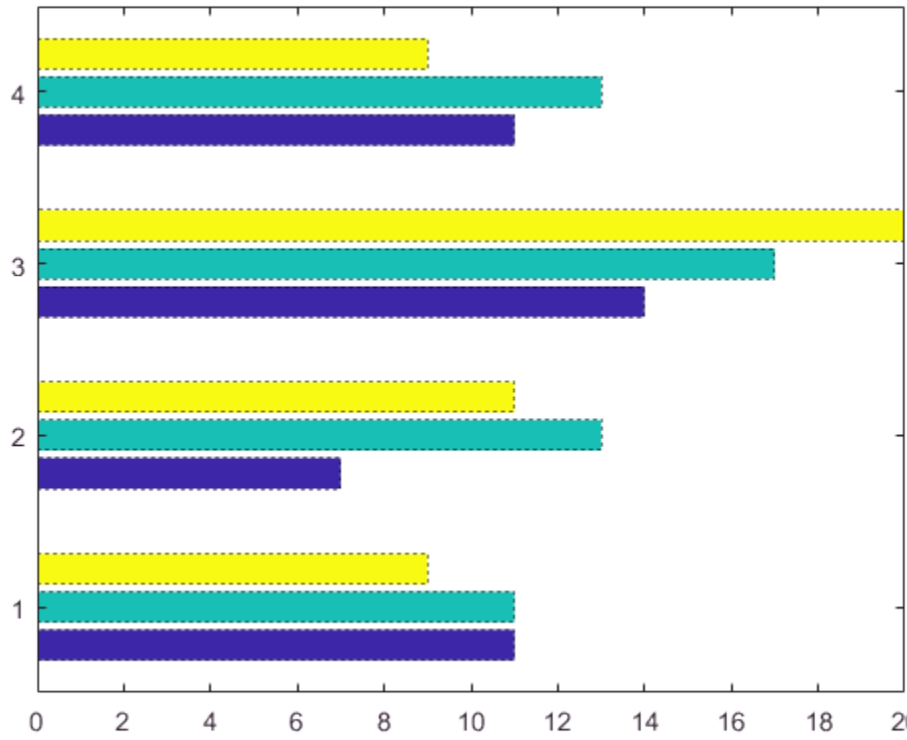

Use the handles in `h` to set different property values for each bar series. Change the face color of the first bar series to cyan by setting the `FaceColor` property to `cyan`. Set the face color for the third bar series using an RGB triplet.

Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
h(1).FaceColor = 'cyan';
```

```
h(3).FaceColor = [0,0.5,0.5];
```

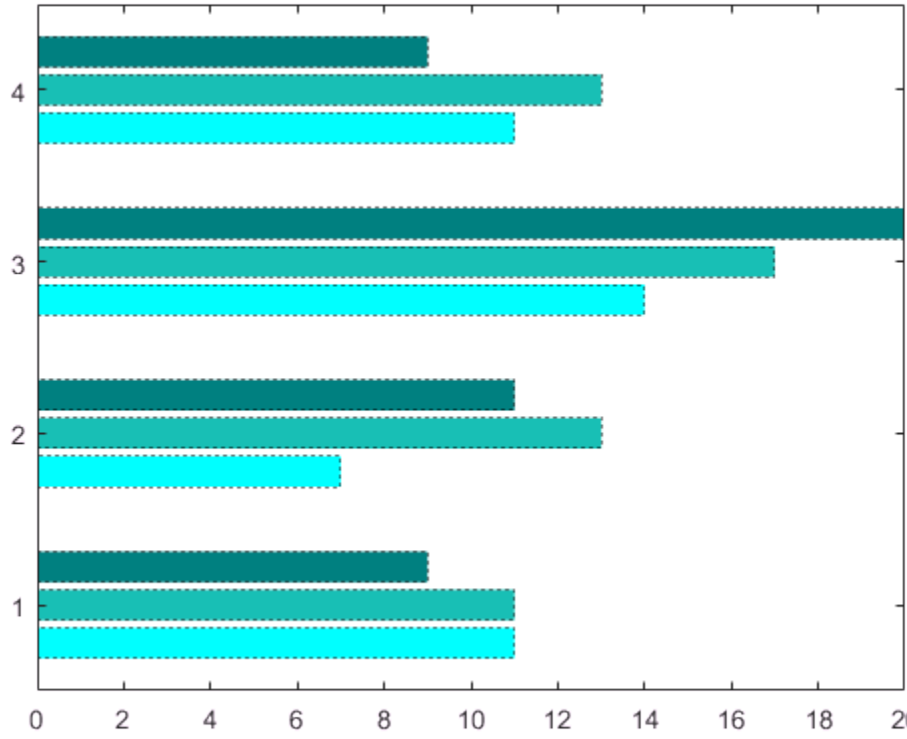

Change Baseline Value for Horizontal Bar Graph

Load the data set `count.dat`, which returns a three-column matrix, `count`. Store `y` as the first six rows of `count`.

```
load count.dat
y = count(1:6,:);
```

Create a horizontal bar graph of `y` and set the basevalue to 25.

```
figure
```

```
barh(y,'BaseValue',25)
```

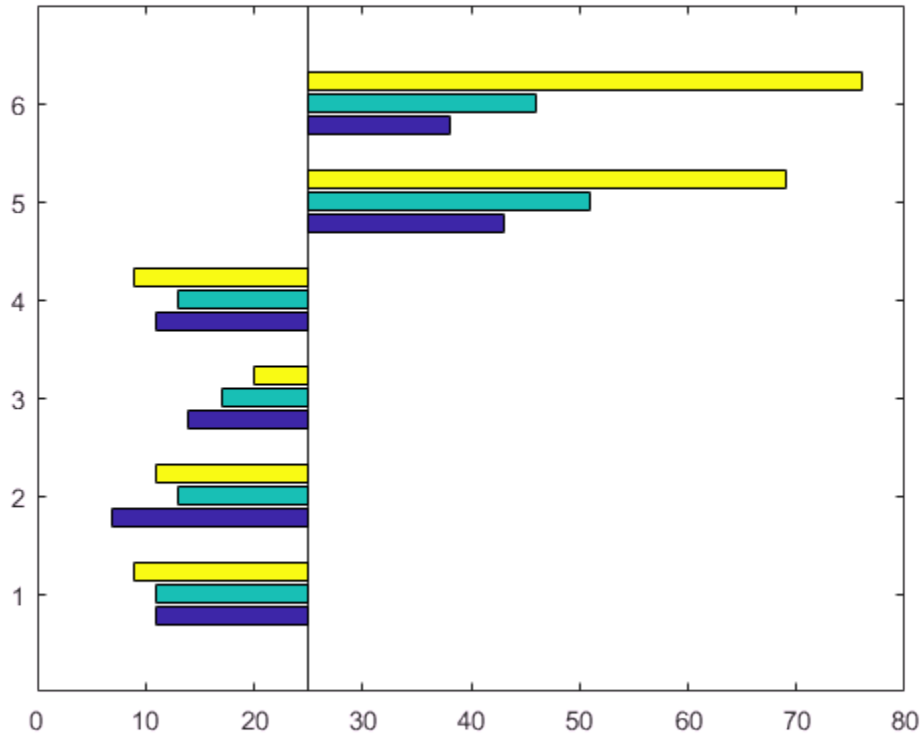

See Also

See Also

Functions

`bar` | `bar3` | `bar3h` | `ColorSpec` | `histogram` | `stairs`

Properties

Bar Properties

Topics

"Modify Baseline of Bar Graph"
"Overlay Bar Graphs"
"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

bar3

Plot 3-D bar graph



Syntax

```
bar3(Y)
bar3(x,Y)
bar3(...,width)
bar3(...,'style')
bar3(...,LineSpec)
bar3(ax,...)
h = bar3(...)
```

Description

`bar3` draws a three-dimensional bar graph.

`bar3(Y)` draws a three-dimensional bar chart, where each element in `Y` corresponds to one bar. When `Y` is a vector, the *x*-axis scale ranges from `1` to `length(Y)`. When `Y` is a matrix, the *x*-axis scale ranges from `1` to `size(Y,1)` and the elements in each row are grouped together.

`bar3(x,Y)` draws a bar chart of the elements in `Y` at the locations specified in `x`, where `x` is a vector defining the *y*-axis intervals for vertical bars. The *x*-values can be nonmonotonic, but cannot contain duplicate values. If `Y` is a matrix, `bar3` clusters elements from the same row in `Y` at locations corresponding to an element in `x`. Values of elements in each row are grouped together.

`bar3(...,width)` sets the width of the bars and controls the separation of bars within a group. The default `width` is `0.8`, so if you do not specify `x`, bars within a group have a slight separation. If `width` is `1`, the bars within a group touch one another.

`bar3(...,'style')` specifies the style of the bars. `'style'` is `'detached'`, `'grouped'`, or `'stacked'`. Default mode of display is `'detached'`.

- `'detached'` displays the elements of each row in `Y` as separate blocks behind one another in the *x* direction.
- `'grouped'` displays *n* groups of *m* vertical bars, where *n* is the number of rows and *m* is the number of columns in `Y`. The group contains one bar per column in `Y`.
- `'stacked'` displays one bar for each row in `Y`. The bar height is the sum of the elements in the row. Each bar is multicolored, with colors corresponding to distinct elements and showing the relative contribution each row element makes to the total sum.

`bar3(...,LineSpec)` displays all bars using the color specified by `LineSpec`.

`bar3(ax,...)` plots into the axes `ax` instead of into the current axes (`gca`).

`h = bar3(...)` returns a vector of `Surface` objects, one for each created. When `Y` is a matrix, `bar3` creates one surface object per column in `Y`.

Examples

Create 3-D Bar Graph

Load the data set `count.dat`, which returns a three-column matrix, `count`. Store `Y` as the first 10 rows of `count`.

```
load count.dat
Y = count(1:10,:);
```

Create a 3-D bar graph of `Y`. By default, the style is `detached`.

```
figure
bar3(Y)
title('Detached Style')
```

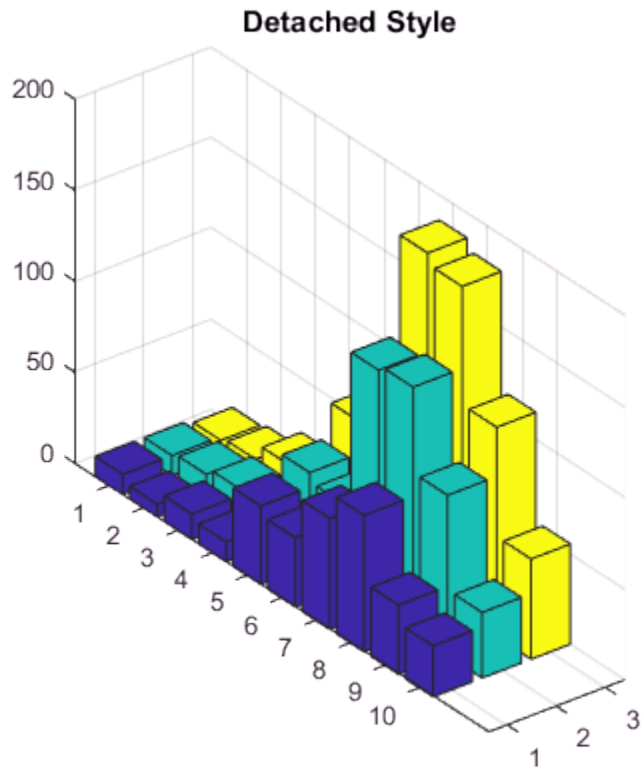

Specify Bar Width for 3-D Bar Graph

Load the data set `count.dat`, which returns a three-column matrix, `count`. Store `Y` as the first 10 rows of `count`.

```
load count.dat
Y = count(1:10,:);
```

Create a 3-D bar graph of Y and set the bar width to 0.5.

```
width = 0.5;

figure
bar3(Y,width)
```

```
title('Bar Width of 0.5')
```

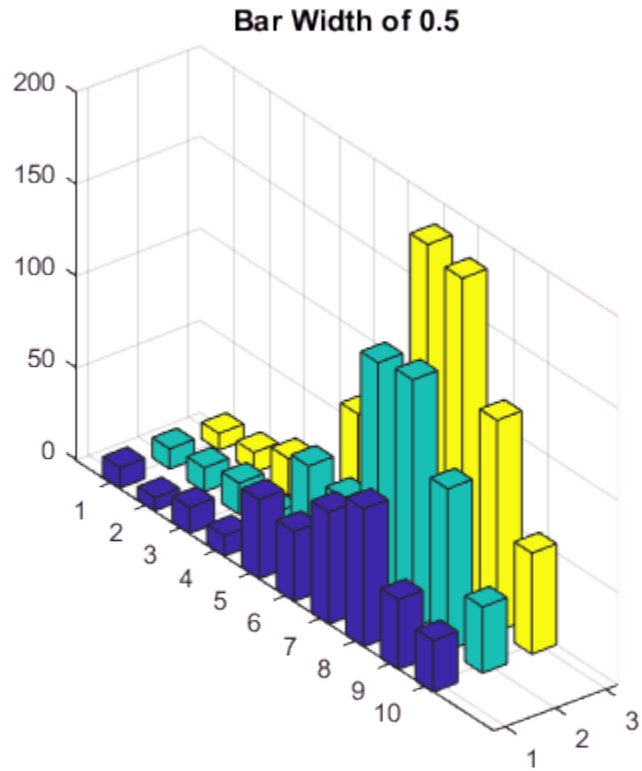

3-D Bar Graph with Grouped Style

Load the data set `count.dat`, which returns a three-column matrix, `count`. Store `Y` as the first 10 rows of `count`.

```
load count.dat
Y = count(1:10,:);
```

Create a 3-D bar graph of `Y`. Group the elements in each row of `Y` by specifying the style option as `grouped`.

```
figure
```

```
bar3(Y,'grouped')
title('Grouped Style')
```

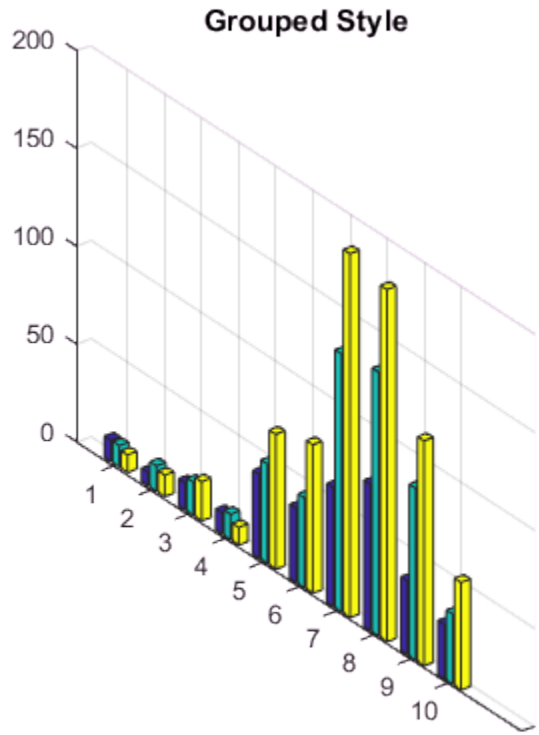

3-D Bar Graph with Stacked Style

Load the data set `count.dat`, which returns a three-column matrix, `count`. Store `Y` as the first 10 rows of `count`.

```
load count.dat
Y = count(1:10,:);
```

Create a 3-D bar graph of `Y`. Stack the elements in each row of `Y` by specifying the style option as `stacked`.

```
figure
bar3(Y,'stacked')
title('Stacked Style')
```

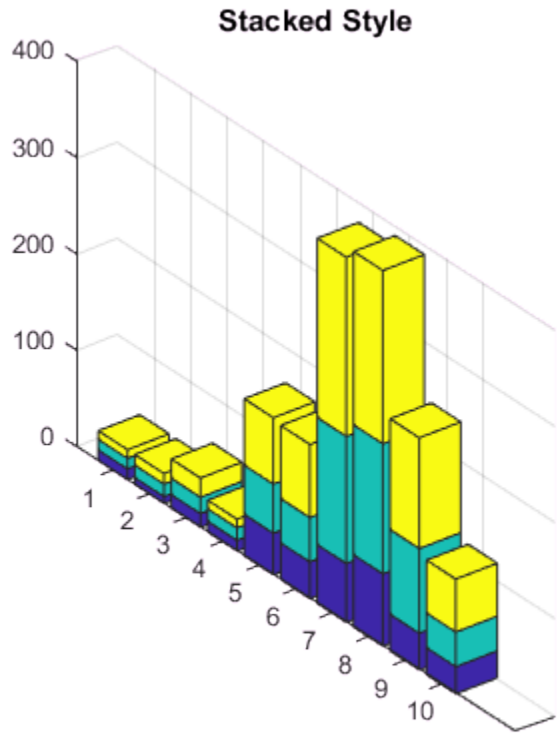

See Also

bar | barh | bar3h | LineSpec

Topics

"Color 3-D Bars by Height"

Introduced before R2006a

bar3h

Plot horizontal 3-D bar graph

Syntax

```
bar3h(Y)
bar3h(x,Y)
bar3h(...,width)
bar3h(...,'style')
bar3h(...,LineSpec)
bar3h(axes_handle,...)
h = bar3h(...)
```

Description

`bar3h` draws three-dimensional horizontal bar charts.

`bar3h(Y)` draws a three-dimensional bar chart, where each element in `Y` corresponds to one bar. When `Y` is a vector, the *y*-axis scale ranges from `1` to `length(Y)`. When `Y` is a matrix, the *y*-axis scale ranges from `1` to `size(Y,1)` and the elements in each row are grouped together.

`bar3h(x,Y)` draws a bar chart of the elements in `Y` at the locations specified in `x`, where `x` is a vector defining the *y*-axis intervals for horizontal bars. The *x*-values can be nonmonotonic, but cannot contain duplicate values. If `Y` is a matrix, `bar3` clusters elements from the same row in `Y` at locations corresponding to an element in `x`. Values of elements in each row are grouped together.

`bar3h(...,width)` sets the width of the bars and controls the separation of bars within a group. The default `width` is `0.8`, so if you do not specify `x`, bars within a group have a slight separation. If `width` is `1`, the bars within a group touch one another.

`bar3h(...,'style')` specifies the style of the bars. `'style'` is `'detached'`, `'grouped'`, or `'stacked'`. Default mode of display is `'detached'`.

- `'detached'` displays the elements of each row in `Y` as separate blocks behind one another in the *y* direction.
- `'grouped'` displays *n* groups of *m* vertical bars, where *n* is the number of rows and *m* is the number of columns in `Y`. The group contains one bar per column in `Y`.
- `'stacked'` displays one bar for each row in `Y`. The bar length is the sum of the elements in the row. Each bar is multicolored, with colors corresponding to distinct elements and showing the relative contribution each row element makes to the total sum.

`bar3h(...,LineSpec)` displays all bars using the color specified by `LineSpec`.

`bar3h(axes_handle,...)` plots into the axes with the handle `axes_handle` instead of into the current axes (`gca`).

`h = bar3h(...)` returns a vector of handles to surface objects, one for each created. When `Y` is a matrix, `bar3h` creates one surface object per column in `Y`.

Examples

Create 3-D Horizontal Bar Graph

Load the data set `count.dat`, which returns a three-column matrix, `count`. Store `Y` as the first ten rows of `count`.

```
load count.dat
Y = count(1:10,:);
```

Create a 3-D horizontal bar graph of `Y`. By default, the style is `detached`.

```
figure
bar3h(Y)
```

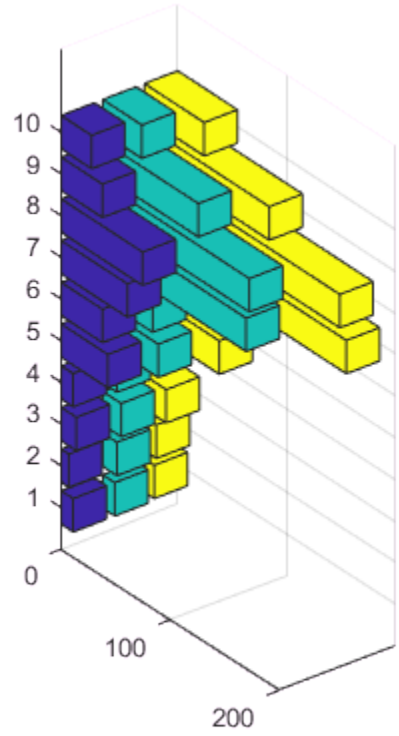

Specify Bar Width for 3-D Horizontal Bar Graph

Load the data set `count.dat`, which returns a three-column matrix, `count`. Store `Y` as the first ten rows of `count`.

```
load count.dat;
Y = count(1:10,:);
```

Create a 3-D horizontal bar graph of `Y` and set the bar width to 0.5.

```
width = 0.5;

figure
```

```
bar3h(Y,width)
title('Width of 0.5')
```

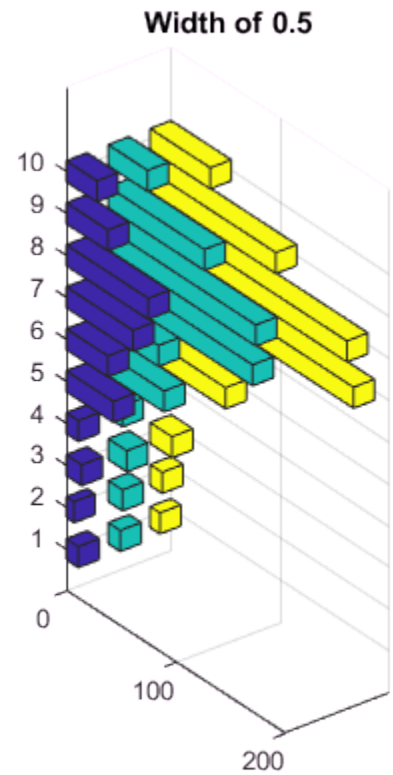

3-D Horizontal Bar Graph with Grouped Style

Load the data set `count.dat`, which returns a three-column matrix, `count`. Store `Y` as the first ten rows of `count`.

```
load count.dat
Y = count(1:10,:);
```

Create a 3-D horizontal bar graph of Y and specify the style option as `grouped`.

```
figure
bar3h(Y,'grouped')
title('Grouped Style Option')
```

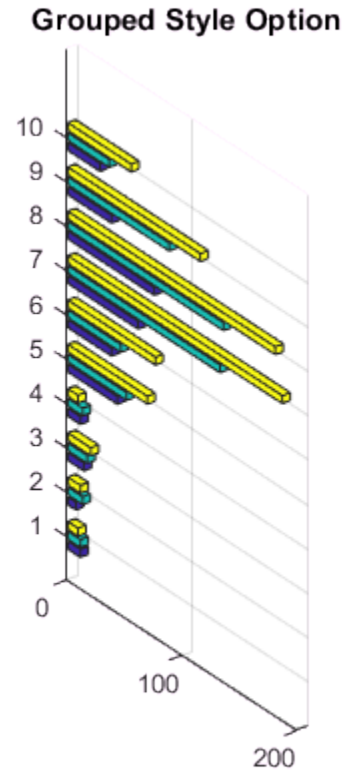

3-D Horizontal Bar Graph with Stacked Option

Load the data set `count.dat`, which returns a three-column matrix, `count`. Store `Y` as the first ten rows of `count`.

```
load count.dat
Y = count(1:10,:);
```

Create a 3-D horizontal bar graph of Y and specify the style option as `stacked`.

```
figure
bar3h(Y,'stacked')
title('Stacked Style Option')
```

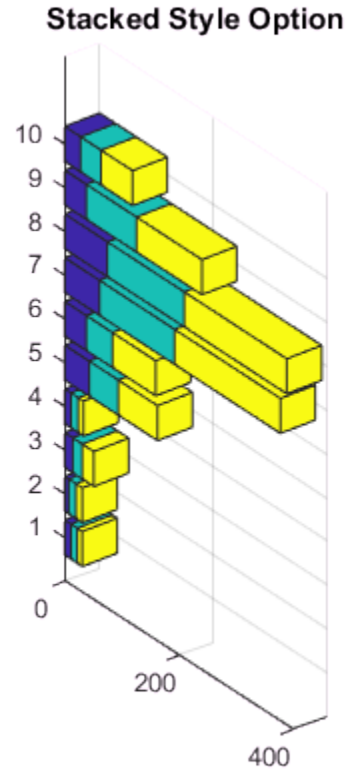

See Also

bar | barh | bar3 | LineSpec | patch

Introduced before R2006a

Bar Properties

Control bar chart appearance and behavior

Description

`Bar` properties control the appearance and behavior of a `Bar` object. By changing property values, you can modify certain aspects of the bar chart.

Starting in R2014b, you can use dot notation to query and set properties.

```
b = bar(1:10);
w = b.BarWidth;
b.BarWidth = 1;
```

If you are using an earlier release, use the `get` and `set` functions instead.

Bars

`BarWidth` — Relative width of individual bars

`0.8` (default) | scalar in range `[0,1]`

Relative width of individual bars, specified as a scalar value in the range `[0,1]`. Use this property to control the separation of bars within a group. The default value is `0.8`, which means that MATLAB separates the bars slightly. If you set this property to `1`, then adjacent bars touch.

Example: `0.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`EdgeColor` — Bar outline color

`[0 0 0]` (default) | `'flat'` | `'none'` | RGB triplet | character vector of color name

Bar outline color, specified as one of these values:

- `'flat'` — Colors based on axes colormap. To change the colormap, use the `colormap` function.

- `'none'` — No color, which makes the outlines invisible.
- RGB triplet or character vector of color name — Specify a custom color. The default RGB triplet value of `[0 0 0]` corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

If you create a bar chart with more than 150 bars along the *x*-axis (or *y*-axis for a horizontal bar chart) and you do not specify the edge color, then the `EdgeColor` property is set to `'none'`. To show the edges, set the `EdgeColor` property to a color value, such as `'k'`.

`FaceColor` — Bar fill color

`'flat'` (default) | `'none'` | RGB triplet | character vector of color name

Bar fill color, specified as one of these values:

- `'flat'` — Colors based on the axes colormap.
- `'none'` — No color, which makes the fill invisible.
- RGB triplet or character vector of a color name — Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

EdgeAlpha — Edge transparency
1 (default) | scalar in range [0,1]

Edge transparency, specified as a scalar in the range [0,1]. A value of 1 is opaque and 0 is completely transparent. Values between 0 and 1 are semitransparent.

Example: b.EdgeAlpha = 0.5;

FaceAlpha — Face transparency
1 (default) | scalar in range [0,1]

Face transparency, specified as a scalar in the range [0,1]. A value of 1 is opaque and 0 is completely transparent. Values between 0 and 1 are semitransparent.

Example: b.FaceAlpha = 0.5;

LineStyle — Line style
'-' (default) | '--' | ':' | '-.' | 'none'

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
'-'	Solid line	————————
'--'	Dashed line	- — — — —

Line Style	Description	Resulting Line
`':'`	Dotted line	.....
`'-.'`	Dash-dotted line	_._._._.-
`'none'`	No line	No line

`LineWidth` — Width of bar outlines

`0.5` (default) | positive value

Width of bar outlines, specified as a positive value in point units. One point equals 1/72 inch.

Example: `1.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Bar Graph Type

`BarLayout` — Arrangement of bars

`'grouped'` (default) | `'stacked'`

Arrangement of bars, specified as one of these values:

- `'grouped'` — Group bars by rows in `Y`, where `Y` is the input argument to the `bar` or `barh` function that created the bar chart.
- `'stacked'` — Display one bar for each row in `Y`. The bar height is the sum of the elements in the row. Each bar is multicolored. Colors correspond to distinct elements and show the relative contribution each row element makes to the total sum.

`Horizontal` — Horizontal bar chart

`'off'` (default) | `'on'`

Horizontal bar chart, specified as one of these values:

- `'on'` — Display bars horizontally. If you create a graph with `barh`, then the `Horizontal` property is set to `'on'`.
- `'off'` — Display bars vertically. If you create the chart with `bar`, then the `Horizontal` property is set to `'off'`.

Baseline

`BaseLine` — Baseline

baseline object

This property is read-only.

Baseline object. For a list of baseline properties, see Baseline Properties.

`BaseValue` — Baseline value

`0` (default) | numeric scalar value

Baseline value, specified as a numeric scalar value.

The baseline value that you specify applies to either the *x*-axis or the *y*-axis depending on the bar chart orientation. If you change the orientation of the bar chart from vertical to horizontal, or vice versa, the baseline value might change. Set the `BaseValue` property after setting the `Horizontal` property.

`ShowBaseLine` — Baseline visibility

`'on'` (default) | `'off'`

Baseline visibility, specified as one of these values:

- `'on'` — Show the baseline.
- `'off'` — Hide the baseline.

Data

`XData` — Bar locations

vector

Bar locations, specified as a vector with no repeating values.

- For vertical bar charts, the values are the bar locations along the *x*-axis.
- For horizontal bar charts, the values are the bar locations along the *y*-axis.

Alternatively, specify the bar locations using the input argument `X` to the `bar` or `barh` function. If you do not specify `X`, then the indices of the values in `YData` determine the bar locations.

`XData` and `YData` must have equal lengths.

Example: `1:10`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`YData` — Bar lengths

vector

Bar lengths, specified as a vector. Alternatively, specify the bar lengths using the input argument `Y` to the `bar` or `barh` function.

`XData` and `YData` must have equal lengths.

Example: `1:10`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`XDataSource` — Variable linked to `XData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `XData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `XData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `XData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'x'`

`YDataSource` — Variable linked to `YData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `YData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `YData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `YData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'y'`

`XDataMode` — Selection mode for `XData`

`'auto'` (default) | `'manual'`

Selection mode for `XData`, specified as one of these values:

- `'auto'` — Use the indices of the values in `YData` (or `ZData` for 3-D plots).
- `'manual'` — Use manually specified values. To specify the values, set the `XData` property or specify the input argument `X` to the plotting function.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold`

`on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'bar'` (default)

This property is read-only.

Type of graphics object, returned as `'bar'`. Use this property to find all objects of a given type within a plotting hierarchy, such as searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

Data Types: `char`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Bar` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. The `HitTest` property determines if the `Bar` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Bar` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Bar` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Bar` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Bar` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Bar` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`HitTestArea` — (removed) Extents of clickable area

`'off'` (default) | `'on'`

Note: `HitTestArea` has been removed. Use `PickableParts` instead.

Extents of clickable area, specified as one of these values:

- `'off'` — Click the object to select it. This is the default value.

- `'on'` — Click anywhere within the extent of the object to select it, that is, anywhere within the rectangle that encloses the object.

Example: `'off'`

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Bar` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Bar` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`bar` | `barh` | `pareto`

Topics
"Access Property Values"
"Graphics Object Properties"

baryToCart

Class: TriRep

(Not recommended) Convert point coordinates from barycentric to Cartesian

---

Note: `baryToCart(TriRep)` is not recommended. Use barycentricToCartesian(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
XC = baryToCart(TR, SI, B)
```

Description

`XC = baryToCart(TR, SI, B)` returns the Cartesian coordinates `XC` of each point in `B` that represents the barycentric coordinates with respect to its associated simplex `SI`.

Input Arguments

`TR`	Triangulation representation.
`SI`	Column vector of simplex indices that index into the triangulation matrix `TR.Triangulation`
`B`	`B` is a matrix that represents the barycentric coordinates of the points to convert with respect to the simplices `SI`. `B` is of size `m`-by-`k`, where `m` = `length(SI)`, the number of points to convert, and `k` is the number of vertices per simplex.

Output Arguments

XC	Matrix of Cartesian coordinates of the converted points. XC is of size m-by-n, where n is the dimension of the space where the triangulation resides. That is, the Cartesian coordinates of the point B(j) with respect to simplex SI(j) is XC(j).

Examples

Compute the Delaunay triangulation of a set of points.

```
x = [0 4 8 12 0 4 8 12]';
y = [0 0 0 0 8 8 8 8]';
dt = DelaunayTri(x,y)
```

Compute the barycentric coordinates of the incenters.

```
cc = incenters(dt);
tri = dt(:,:);
```

Plot the original triangulation and reference points.

```
figure
subplot(1,2,1);
triplot(dt); hold on;
plot(cc(:,1), cc(:,2), '*r'); hold off;
axis equal;
```

Stretch the triangulation and compute the mapped locations of the incenters on the deformed triangulation.

```
b = cartToBary(dt,[1:length(tri)]',cc);
y = [0 0 0 0 16 16 16 16]';
tr = TriRep(tri,x,y)
xc = baryToCart(tr, [1:length(tri)]', b);
```

Plot the deformed triangulation and mapped locations of the reference points.

```
subplot(1,2,2);
triplot(tr); hold on;
plot(xc(:,1), xc(:,2), '*r'); hold off;
axis equal;
```

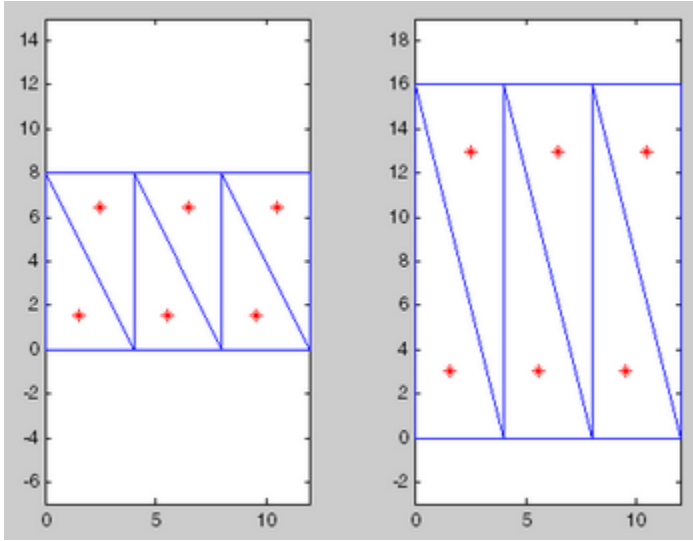

Definitions

Simplex

A simplex is a triangle/tetrahedron or higher-dimensional equivalent.

See Also

delaunayTriangulation | cartesianToBarycentric | pointLocation | triangulation

base2dec

Convert text representing number in base N to decimal number

Syntax

```
d = base2dec('strn', base)
```

Description

`d = base2dec('strn', base)` converts *`strn`*, text representing a number in the base specified by `base`, into its decimal (base 10) equivalent. `base` must be an integer between 2 and 36. *`strn`* must represent a nonnegative integer value. If *`strn`* represents an integer value greater than the value returned by `flintmax`, then `base2dec` might not return an exact conversion.

`strn` can be a character array, a cell array of character vectors, or a string column vector. If *`strn`* is a character array, then each row represents a number in the base specified by `base`. If *`strn`* is a cell array of character vectors or a string column vector, then each element represents a number in the base specified by `base`.

Examples

The expression `base2dec('212',3)` converts 212_3 to decimal, returning 23.

See Also

`dec2base` | `hex2dec` | `bin2dec` | `flintmax`

Baseline Properties

Control baseline appearance and behavior

Description

`Baseline` objects are created as part of bar charts, area charts, and stem charts. `Baseline` properties control the appearance and behavior of a `Baseline` object. By changing property values, you can modify certain aspects of the baseline. Use dot notation to refer to a particular object and property:

```
b = bar(1:10);
bl = b.BaseLine;
c = bl.Color;
bl.Color = 'red';
```

Appearance

`Color` — Line color

RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you specify the color as `'none'`, then the baseline is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`

Long Name	Short Name	RGB Triplet
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`LineStyle` — Line style

`'-' | '--' | ':' | '-.' | 'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

positive value

Line width, specified as a positive value in point units.

Example: `0.75`

Location and Visibility

`BaseValue` — Value of baseline

scalar

Value of the baseline, specified as a scalar.

Typically, baselines are associated with bar series, stem series, or area objects. The `BaseValue` property for the associated object and the `BaseValue` property for the

baseline object always have the same value. Setting one property also sets the other property. The `BaseLine` property for the associated object contains the baseline object.

Example: `0.75`

`Visible` — Visibility

`'on'` | `'off'`

Visibility, specified as one of these values:

- `'on'` — Display the baseline.
- `'off'` — Hide the baseline without deleting it. You can access the properties of an invisible baseline.

Typically, baselines are associated with bar series, stem series, or area objects. The `ShowBaseline` property for the associated object and the `Visible` property for the baseline object always have the same value. Setting one property also sets the other property. The `BaseLine` property for the associated object contains the baseline object.

Parent/Child

`Parent` — Parent

`Axes` object

Parent, returned as an `Axes` object. However, `Baseline` objects are not listed as children of the axes.

`Children` — Children

empty `GraphicsPlaceholder` array

The baseline has no children. You cannot set this property.

See Also

See Also

`area` | `bar` | `barh` | `stem`

Topics

"Access Property Values"

"Graphics Object Properties"

beep

Produce operating system beep sound

Syntax

```
beep
beep on
beep off
```

```
status = beep
```

Description

`beep` produces your computer's default beep sound, if it is enabled.

`beep on` enables the beep sound.

`beep off` disables the beep sound.

`status = beep` returns the current beep mode (`on` or `off`).

Examples

Produce Beep Sound

Produce your system’s default beep sound after a period of silence.

Pause for 5 seconds of silence, and then produce your system’s default beep sound.

```
pause(5)
beep
```

Tips

- If you have configured your system not to produce any sound, then `beep` is silent.

- `beep` produces the operating system's default beep sound. To produce a sound and specify its pitch and duration in MATLAB, use the `sound` function.

See Also

See Also

`sound`

Introduced before R2006a

BeginInvoke

Initiate asynchronous .NET delegate call

Syntax

```
result = BeginInvoke(arg1,...,argN,callback,object)
```

Description

`result = BeginInvoke(arg1,...,argN,callback,object)` initiates asynchronous call to a .NET delegate. You must call `EndInvoke` to complete the asynchronous call.

Input Arguments

`arg1,...,argN`

Input arguments for delegate. The type and number of arguments must agree with the delegate signature.

`callback`

.NET System.AsyncCallback delegate, or `[]` null value.

`object`

User-defined object, or `[]` null value.

Output Arguments

`result`

.NET System.IAsyncResult object. Used to monitor the progress of the asynchronous call. Input argument to `EndInvoke`.

See Also

`EndInvoke`

Topics

"Calling .NET Methods Asynchronously"

External Websites

MSDN Calling Synchronous Methods Asynchronously

Introduced in R2011a

bench

MATLAB benchmark

Syntax

```
bench
bench(N)
bench(O)
t = bench(N)
```

Description

`bench` measures the execution speed of six different MATLAB tasks and compares it to the speed of several other computers. The six tasks are:

Test	Description	Performance Factors
LU	Perform `lu` of a full matrix	Floating-point, regular memory access
FFT	Perform `fft` of a full vector	Floating-point, irregular memory access
ODE	Solve van der Pol equation with `ode45`	Data structures and MATLAB function files
Sparse	Solve a symmetric sparse linear system	Mixed integer and floating-point
2-D	Plot Lissajous curves	2-D line drawing graphics
3-D	Display colormapped `peaks` with clipping and transforms	3-D animated OpenGL graphics

A final bar chart shows speed, which is inversely proportional to time. The longer bars represent faster machines, and the shorter bars represent the slower ones.

`bench(N)` runs each of the six tasks N times.

`bench(O)` just displays the results from other machines.

`t = bench(N)` returns an N-by-6 array with the execution times.

Tips

Note: A benchmark is intended to compare performance of one particular version of MATLAB on different machines. It does not offer direct comparisons between different versions of MATLAB because tasks and problem sizes change from version to version.

The LU and FFT tasks involve large matrices and long vectors. The 2-D and 3-D tasks measure graphics performance, including software or hardware support for OpenGL®. The command

```
opengl info
```

describes the OpenGL support available on a particular machine.

Fluctuations of five or ten percent in the measured times of repeated runs on a single machine are normal.

See Also

`profile` | `mlint` | `profsave` | `mlintrpt` | `memory` | `pack` | `tic` | `cputime` | `rehash`

Introduced in R2008a

besselh

Bessel function of third kind (Hankel function)

Syntax

```
H = besselh(nu,K,Z)
H = besselh(nu,Z)
H = besselh(nu,K,Z,1)
```

Description

`H = besselh(nu,K,Z)` computes the Hankel function $H_\nu^{(K)}(z)$ where `K` = 1 or 2, for each element of the complex array `Z`. If `nu` and `Z` are arrays of the same size, the result is also that size. If either input is a scalar, `besselh` expands it to the other input's size.

`H = besselh(nu,Z)` uses `K` = 1.

`H = besselh(nu,K,Z,1)` scales $H_\nu^{(K)}(z)$ by `exp(-i*Z)` if `K` = 1, and by `exp(+i*Z)` if `K` = 2.

Examples

Modulus and Phase of Hankel Function

This example generates the contour plots of the modulus and phase of the Hankel function $H_0^{(1)}(z)$ shown on page 359 of Abramowitz and Stegun, *Handbook of Mathematical Functions* [1].

Create a grid of values for the domain.

```
[X,Y] = meshgrid(-4:0.025:2,-1.5:0.025:1.5);
```

Calculate the Hankel function over this domain and generate the modulus contour plot.

```
H = besselh(0,1,X+1i*Y);
contour(X,Y,abs(H),0:0.2:3.2)
hold on
```

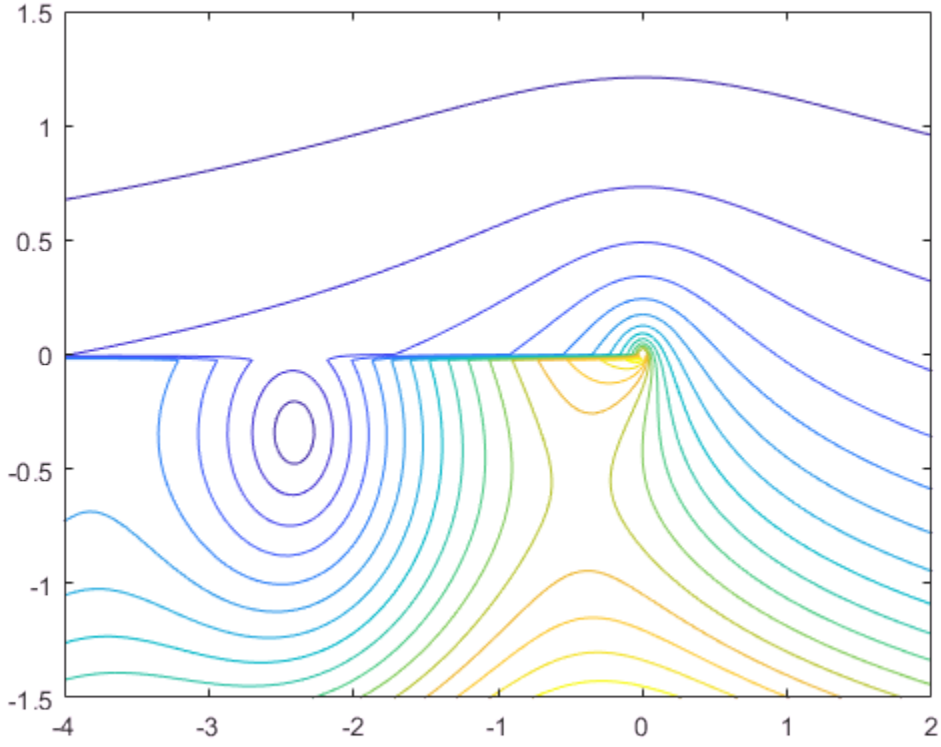

In the same figure, add the contour plot of the phase.

```
contour(X,Y,(180/pi)*angle(H),-180:10:180)
hold off
```

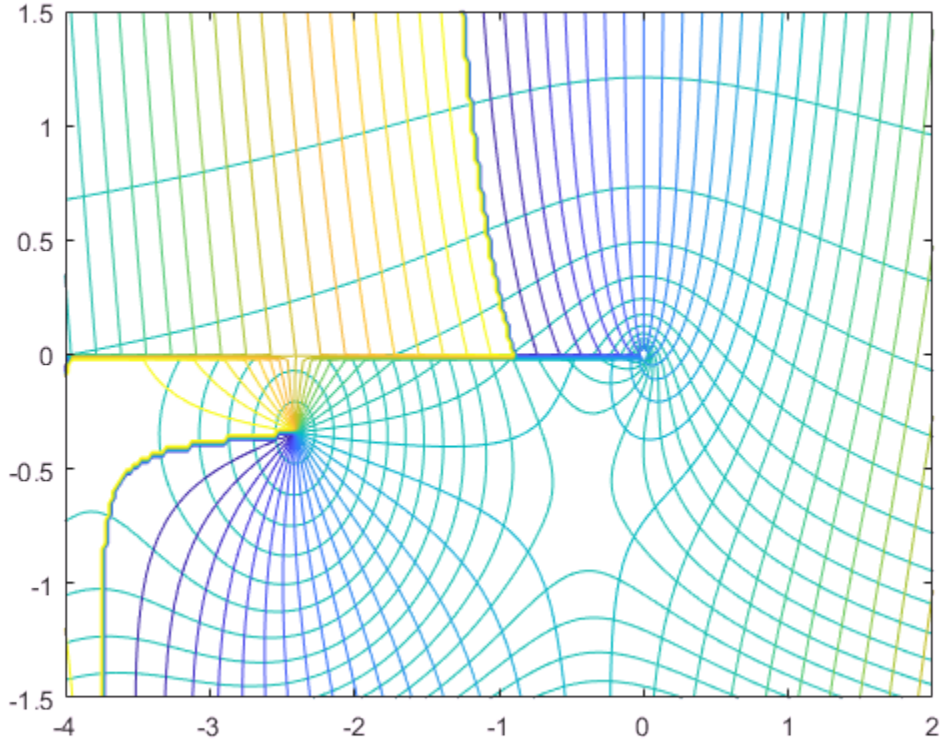

Definitions

Bessel's Equation

The differential equation

$$z^2 \frac{d^2 y}{dz^2} + z \frac{dy}{dz} + \left(z^2 - v^2\right) y = 0,$$

where ν is a real constant, is called *Bessel's equation*, and its solutions are known as *Bessel functions*. $J_\nu(z)$ and $J_{-\nu}(z)$ form a fundamental set of solutions of Bessel's equation for noninteger ν. $Y_\nu(z)$ is a second solution of Bessel's equation—linearly independent of $J_\nu(z)$—defined by

$$Y_\nu(z) = \frac{J_\nu(z)\cos(\nu\pi) - J_{-\nu}(z)}{\sin(\nu\pi)}.$$

The relationship between the Hankel and Bessel functions is

$$H_\nu^{(1)}(z) = J_\nu(z) + iY_\nu(z)$$
$$H_\nu^{(2)}(z) = J_\nu(z) - iY_\nu(z),$$

where $J_\nu(z)$ is `besselj`, and $Y_\nu(z)$ is `bessely`.

References

[1] Abramowitz, M., and I.A. Stegun, *Handbook of Mathematical Functions*, National Bureau of Standards, Applied Math. Series #55, Dover Publications, 1965.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

`besselj` | `bessely` | `besseli` | `besselk`

besseli

Modified Bessel function of first kind

Syntax

```
I = besseli(nu,Z)
I = besseli(nu,Z,1)
```

Description

`I = besseli(nu,Z)` computes the modified Bessel function of the first kind, $I_\nu(z)$, for each element of the array `Z`. The order `nu` need not be an integer, but must be real. The argument `Z` can be complex. The result is real where `Z` is positive.

If `nu` and `Z` are arrays of the same size, the result is also that size. If either input is a scalar, it is expanded to the other input's size.

`I = besseli(nu,Z,1)` computes `besseli(nu,Z).*exp(-abs(real(Z)))`.

Examples

Vector of Function Values

Create a column vector of domain values.

```
z = (0:0.2:1)';
```

Calculate the function values using `besseli` with `nu = 1`.

```
format long
besseli(1,z)
```

```
ans =
                   0
```

```
0.100500834028125
0.204026755733571
0.313704025604922
0.432864802620640
0.565159103992485
```

Plot Modified Bessel Functions of First Kind

Define the domain.

```
X = 0:0.01:5;
```

Calculate the first five modified Bessel functions of the first kind.

```
I = zeros(5,501);
for i = 0:4
    I(i+1,:) = besseli(i,X);
end
```

Plot the results.

```
plot(X,I,'LineWidth',1.5)
axis([0 5 0 8])
grid on
legend('I_0','I_1','I_2','I_3','I_4','Location','Best')
title('Modified Bessel Functions of the First Kind for v = 0,1,2,3,4')
xlabel('X')
ylabel('I_v(X)')
```

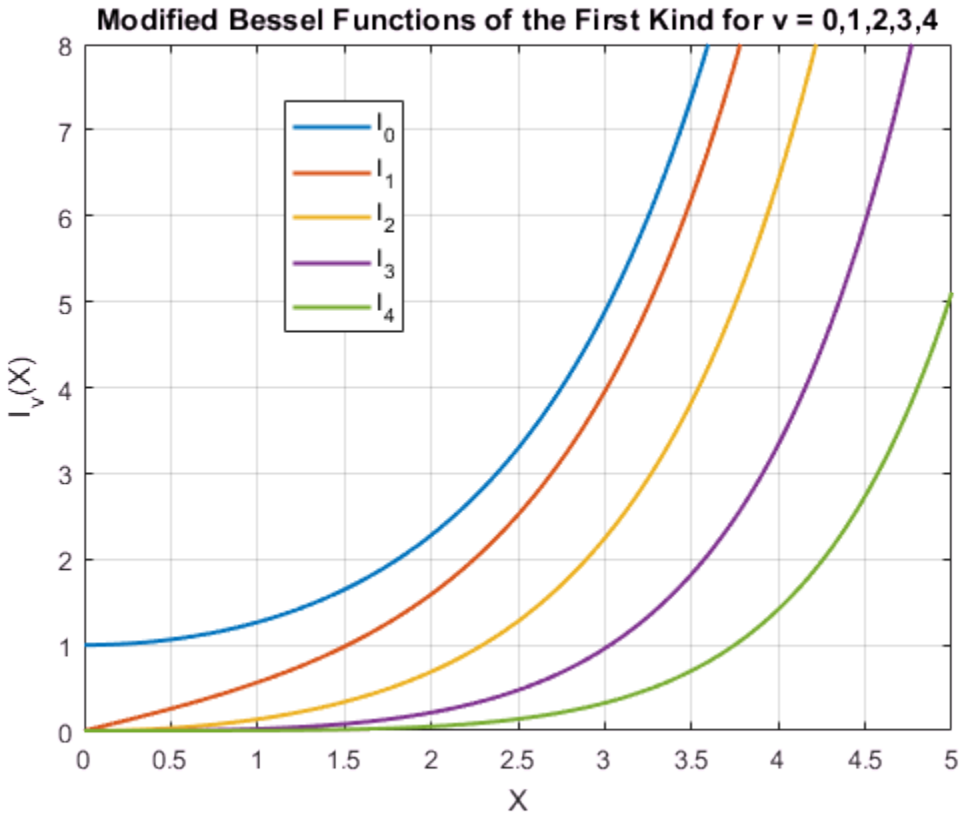

Definitions

Bessel's Equation

The differential equation

$$z^2 \frac{d^2 y}{dz^2} + z \frac{dy}{dz} - \left(z^2 + v^2 \right) y = 0,$$

where ν is a real constant, is called the *modified Bessel's equation*, and its solutions are known as *modified Bessel functions*.

$I_\nu(z)$ and $I_{-\nu}(z)$ form a fundamental set of solutions of the modified Bessel's equation. $I_\nu(z)$ is defined by

$$I_\nu(z) = \left(\frac{z}{2}\right)^\nu \sum_{(k=0)}^{\infty} \frac{\left(\frac{z^2}{4}\right)^k}{k!\,\Gamma(\nu+k+1)},$$

where $\Gamma(a)$ is the gamma function.

$K_\nu(z)$ is a second solution, independent of $I_\nu(z)$. It can be computed using `besselk`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If the order `nu` is less than `0`, then it must be an integer.
- Always returns a complex result.

See Also

`airy` | `besselh` | `besselj` | `besselk` | `bessely`

besselj

Bessel function of first kind

Syntax

```
J = besselj(nu,Z)
J = besselj(nu,Z,1)
```

Description

`J = besselj(nu,Z)` computes the Bessel function of the first kind, $J_\nu(z)$, for each element of the array `Z`. The order `nu` need not be an integer, but must be real. The argument `Z` can be complex. The result is real where `Z` is positive.

If `nu` and `Z` are arrays of the same size, the result is also that size. If either input is a scalar, it is expanded to the other input's size.

`J = besselj(nu,Z,1)` computes `besselj(nu,Z).*exp(-abs(imag(Z)))`.

Examples

Vector of Function Values

Create a column vector of domain values.

```
z = (0:0.2:1)';
```

Calculate the function values using `besselj` with `nu = 1`.

```
besselj(1,z)
```

```
ans =

         0
```

```
    0.0995
    0.1960
    0.2867
    0.3688
    0.4401
```

Plot Bessel Functions of First Kind

Define the domain.

```
X = 0:0.1:20;
```

Calculate the first five Bessel functions of the first kind.

```
J = zeros(5,201);
for i = 0:4
    J(i+1,:) = besselj(i,X);
end
```

Plot the results.

```
plot(X,J,'LineWidth',1.5)
axis([0 20 -.5 1])
grid on
legend('J_0','J_1','J_2','J_3','J_4','Location','Best')
title('Bessel Functions of the First Kind for v = 0,1,2,3,4')
xlabel('X')
ylabel('J_v(X)')
```

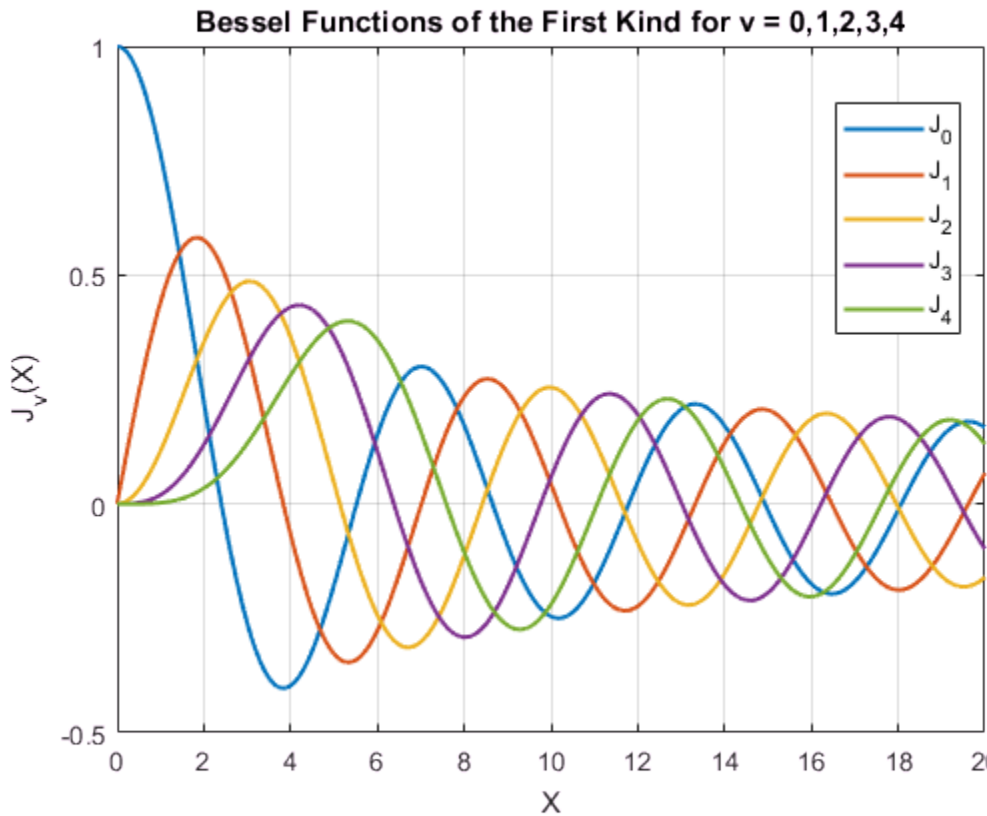

Definitions

Bessel's Equation

The differential equation

$$z^2 \frac{d^2 y}{dz^2} + z \frac{dy}{dz} + \left(z^2 - v^2\right) y = 0,$$

where ν is a real constant, is called *Bessel's equation*, and its solutions are known as *Bessel functions*.

$J_\nu(z)$ and $J_{-\nu}(z)$ form a fundamental set of solutions of Bessel's equation for noninteger ν. $J_\nu(z)$ is defined by

$$J_\nu(z) = \left(\frac{z}{2}\right)^\nu \sum_{(k=0)}^{\infty} \frac{\left(\frac{-z^2}{4}\right)^k}{k!\,\Gamma(\nu+k+1)}$$

where $\Gamma(a)$ is the gamma function.

$Y_\nu(z)$ is a second solution of Bessel's equation that is linearly independent of $J_\nu(z)$. It can be computed using `bessely`.

Tips

The Bessel functions are related to the Hankel functions, also called Bessel functions of the third kind, by the formula

$$H_\nu^{(1)}(z) = J_\nu(z) + iY_\nu(z)$$
$$H_\nu^{(2)}(z) = J_\nu(z) - iY_\nu(z)$$

where $H_\nu^{(K)}(z)$ is `besselh`, $J_\nu(z)$ is `besselj`, and $Y_\nu(z)$ is `bessely`. The Hankel functions also form a fundamental set of solutions to Bessel's equation (see `besselh`).

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If the order `nu` is less than `0`, then it must be an integer.
- Always returns a complex result.

See Also

`besselh` | `besseli` | `besselk` | `bessely`

besselk

Modified Bessel function of second kind

Syntax

```
K = besselk(nu,Z)
K = besselk(nu,Z,1)
```

Description

`K = besselk(nu,Z)` computes the modified Bessel function of the second kind, $K_\nu(z)$, for each element of the array `Z`. The order `nu` need not be an integer, but must be real. The argument `Z` can be complex. The result is real where `Z` is positive.

If `nu` and `Z` are arrays of the same size, the result is also that size. If either input is a scalar, it is expanded to the other input's size.

`K = besselk(nu,Z,1)` computes `besselk(nu,Z).*exp(Z)`.

Examples

Column Vector of Function Values

Create a column vector of domain values.

```
z = (0:0.2:1)';
```

Calculate the function values using `besselk` with `nu = 1`.

```
format long
besselk(1,z)
```

```
ans =
                  Inf
```

```
   4.775972543220472
   2.184354424732687
   1.302834939763502
   0.861781634472180
   0.601907230197235
```

Plot Modified Bessel Functions of Second Kind

Define the domain.

```
X = 0:0.01:5;
```

Calculate the first five modified Bessel functions of the second kind.

```
K = zeros(5,501);
for i = 0:4
    K(i+1,:) = besselk(i,X);
end
```

Plot the results.

```
plot(X,K,'LineWidth',1.5)
axis([0 5 0 8])
grid on
legend('K_0','K_1','K_2','K_3','K_4','Location','Best')
title('Modified Bessel Functions of the Second Kind for v = 0,1,2,3,4')
xlabel('X')
ylabel('K_v(X)')
```

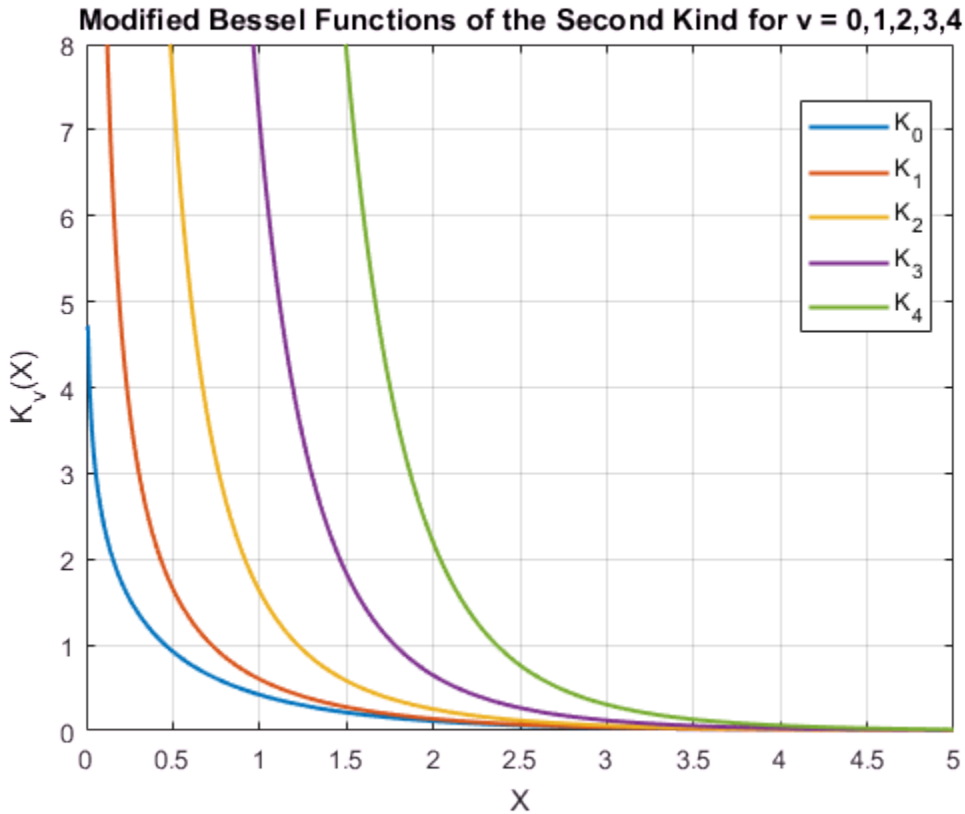

Definitions

Bessel's Equation

The differential equation

$$z^2 \frac{d^2 y}{dz^2} + z \frac{dy}{dz} - \left(z^2 + v^2 \right) y = 0,$$

where ν is a real constant, is called the *modified Bessel's equation*, and its solutions are known as *modified Bessel functions*.

A solution $K_\nu(z)$ of the second kind can be expressed as:

$$K_\nu(z) = \left(\frac{\pi}{2}\right)\frac{I_{-\nu}(z) - I_\nu(z)}{\sin(\nu\pi)},$$

where $I_\nu(z)$ and $I_{-\nu}(z)$ form a fundamental set of solutions of the modified Bessel's equation,

$$I_\nu(z) = \left(\frac{z}{2}\right)^\nu \sum_{k=0}^{\infty} \frac{\left(\frac{z^2}{4}\right)^k}{k!\Gamma(\nu + k + 1)}$$

and $\Gamma(a)$ is the gamma function. $K_\nu(z)$ is independent of $I_\nu(z)$.

$I_\nu(z)$ can be computed using `besseli`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

`airy` | `besselh` | `besseli` | `besselj` | `bessely`

bessely

Bessel function of second kind

Syntax

```
Y = bessely(nu,Z)
Y = bessely(nu,Z,1)
```

Description

`Y = bessely(nu,Z)` computes Bessel functions of the second kind, $Y_\nu(z)$, for each element of the array `Z`. The order `nu` need not be an integer, but must be real. The argument `Z` can be complex. The result is real where `Z` is positive.

If `nu` and `Z` are arrays of the same size, the result is also that size. If either input is a scalar, it is expanded to the other input's size.

`Y = bessely(nu,Z,1)` computes `bessely(nu,Z).*exp(-abs(imag(Z)))`.

Examples

Vector of Function Values

Create a column vector of domain values.

```
z = (0:0.2:1)';
```

Calculate the function values using `bessely` with `nu = 1`.

```
bessely(1,z)
```

```
ans =

      -Inf
```

```
   -3.3238
   -1.7809
   -1.2604
   -0.9781
   -0.7812
```

Plot Bessel Functions of Second Kind

Define the domain.

```
X = 0:0.1:20;
```

Calculate the first five Bessel functions of the second kind.

```
Y = zeros(5,201);
for i = 0:4
    Y(i+1,:) = bessely(i,X);
end
```

Plot the results.

```
plot(X,Y,'LineWidth',1.5)
axis([-0.1 20.2 -2 0.6])
grid on
legend('Y_0','Y_1','Y_2','Y_3','Y_4','Location','Best')
title('Bessel Functions of the Second Kind for v = 0,1,2,3,4')
xlabel('X')
ylabel('Y_v(X)')
```

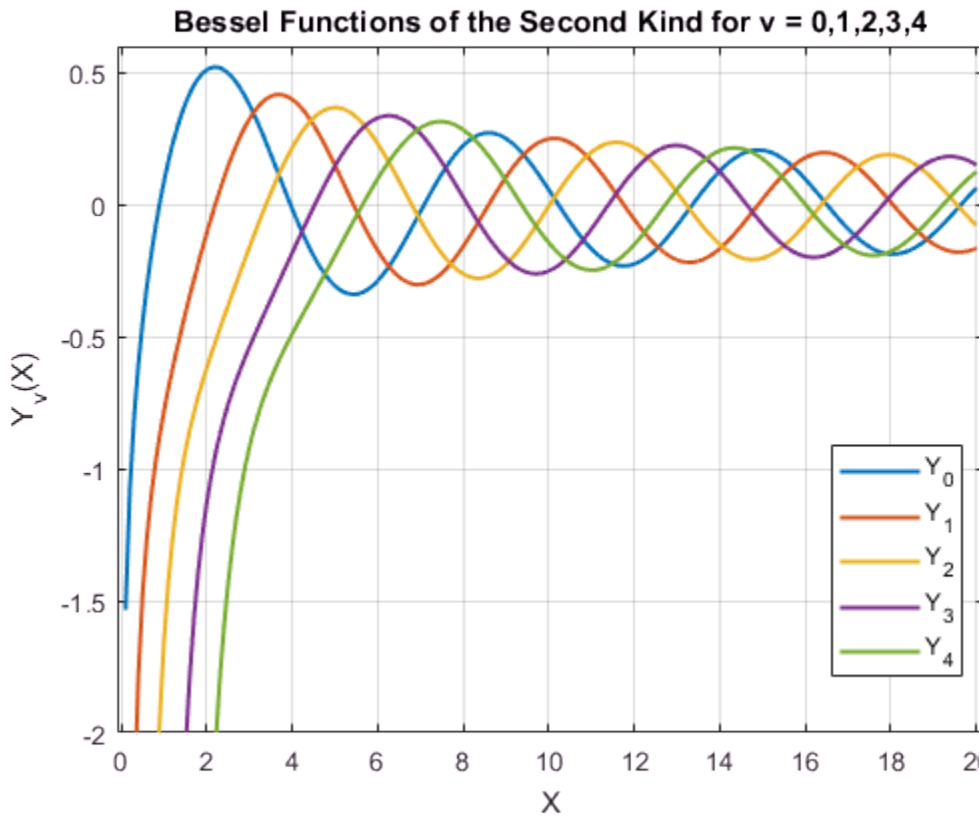

Definitions

Bessel's Equation

The differential equation

$$z^2 \frac{d^2 y}{dz^2} + z \frac{dy}{dz} + \left(z^2 - v^2\right) y = 0,$$

where ν is a real constant, is called *Bessel's equation*, and its solutions are known as *Bessel functions*.

A solution $Y_\nu(z)$ of the second kind can be expressed as

$$Y_\nu(z) = \frac{J_\nu(z)\cos(\nu\pi) - J_{-\nu}(z)}{\sin(\nu\pi)}$$

where $J_\nu(z)$ and $J_{-\nu}(z)$ form a fundamental set of solutions of Bessel's equation for noninteger ν

$$J_\nu(z) = \left(\frac{z}{2}\right)^\nu \sum_{k=0}^{\infty} \frac{\left(-\frac{z^2}{4}\right)^k}{k!\,\Gamma(\nu+k+1)},$$

and $\Gamma(a)$ is the gamma function. $Y_\nu(z)$ is linearly independent of $J_\nu(z)$.

$J_\nu(z)$ can be computed using `besselj`.

Tips

The Bessel functions are related to the Hankel functions, also called Bessel functions of the third kind,

$$H_\nu^{(1)}(z) = J_\nu(z) + iY_\nu(z)$$
$$H_\nu^{(2)}(z) = J_\nu(z) - iY_\nu(z),$$

where $H_\nu^{(K)}(z)$ is `besselh`, $J_\nu(z)$ is `besselj`, and $Y_\nu(z)$ is `bessely`. The Hankel functions also form a fundamental set of solutions to Bessel's equation (see `besselh`).

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

`besselh` | `besseli` | `besselj` | `besselk`

beta

Beta function

Syntax

```
B = beta(Z,W)
```

Description

`B = beta(Z,W)` computes the beta function for corresponding elements of arrays `Z` and `W`. The arrays must be real and nonnegative. They must be the same size, or either can be scalar.

Examples

In this example, which uses integer arguments,

```
beta(n,3)
   = (n-1)!*2!/(n+2)!
   = 2/(n*(n+1)*(n+2))
```

is the ratio of fairly small integers, and the rational format is able to recover the exact result.

```
format rat
beta((0:10)',3)

ans =

     1/0
     1/3
     1/12
     1/30
     1/60
     1/105
     1/168
```

```
1/252
1/360
1/495
1/660
```

Definitions

Beta Function

The beta function is

$$B(z,w) = \int_0^1 t^{z-1}(1-t)^{w-1}dt = \frac{\Gamma(z)\Gamma(w)}{\Gamma(z+w)}$$

where $\Gamma(z)$ is the gamma function.

Algorithms

```
beta(z,w) = exp(gammaln(z)+gammaln(w)-gammaln(z+w))
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`betainc` | `betaln` | `gammaln`

Introduced before R2006a

betainc

Incomplete beta function

Syntax

```
I = betainc(X,Z,W)
I = betainc(X,Z,W,tail)
```

Description

`I = betainc(X,Z,W)` computes the incomplete beta function for corresponding elements of the arrays `X`, `Z`, and `W`. The elements of `X` must be in the closed interval [0,1]. The arrays `Z` and `W` must be nonnegative and real. All arrays must be the same size, or any of them can be scalar.

`I = betainc(X,Z,W,tail)` specifies the tail of the incomplete beta function. Choices are:

`'lower'` (the default)	Computes the integral from `0` to `x`
`'upper'`	Computes the integral from `x` to `1`

These functions are related as follows:

```
1-betainc(X,Z,W) = betainc(X,Z,W,'upper')
```

Note that especially when the upper tail value is close to `0`, it is more accurate to use the `'upper'` option than to subtract the `'lower'` value from `1`.

Examples

Compute Incomplete Beta Function

Compute the incomplete beta function corresponding to the elements of `Z` according to the parameters `X` and `W`.

```
format long

X = 0.5;
Z = (0:10)';
W = 3;

I = betainc(X,Z,W)

I =
   1.000000000000000
   0.875000000000000
   0.687500000000000
   0.500000000000000
   0.343750000000000
   0.226562500000000
   0.144531250000000
   0.089843750000000
   0.054687500000000
   0.032714843750000
   0.019287109375000
```

Definitions

Incomplete Beta Function

The incomplete beta function is

$$I_x(z,w) = \frac{1}{B(z,w)} \int_0^x t^{z-1}(1-t)^{w-1}\,dt$$

where $B(z,w)$, the beta function, is defined as

$$B(z,w) = \int_0^1 t^{z-1}(1-t)^{w-1}\,dt = \frac{\Gamma(z)\Gamma(w)}{\Gamma(z+w)}$$

and $\Gamma(z)$ is the gamma function.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Always returns a complex result.

See Also

`beta` | `betaln`

Introduced before R2006a

betaincinv

Beta inverse cumulative distribution function

Syntax

```
x = betaincinv(y,z,w)
x = betaincinv(y,z,w,tail)
```

Description

`x = betaincinv(y,z,w)` computes the inverse incomplete beta function for corresponding elements of `y`, `z`, and `w`, such that `y = betainc(x,z,w)`. The elements of `y` must be in the closed interval [0,1], and those of `z` and `w` must be nonnegative. `y`, `z`, and `w` must all be real and the same size (or any of them can be scalar).

`x = betaincinv(y,z,w,tail)` specifies the tail of the incomplete beta function. Choices are `'lower'` (the default) to use the integral from 0 to `x`, or `'upper'` to use the integral from `x` to 1. These two choices are related as follows: `betaincinv(y,z,w,'upper') = betaincinv(1-y,z,w,'lower')`. When `y` is close to 0, the `'upper'` option provides a way to compute `x` more accurately than by subtracting `y` from 1.

Definitions

Inverse Incomplete Beta Function

The incomplete beta function is defined as

$$I_x(z,w) = \frac{1}{\beta(z,w)} \int_0^x t^{(z-1)} (1-t)^{(w-1)} \, dt$$

`betaincinv` computes the inverse of the incomplete beta function with respect to the integration limit `x` using Newton's method.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Always returns a complex result.

See Also

`betainc` | `beta` | `betaln`

betaln

Logarithm of beta function

Syntax

```
L = betaln(Z,W)
```

Description

`L = betaln(Z,W)` computes the natural logarithm of the `beta` function `log(beta(Z,W))`, for corresponding elements of arrays `Z` and `W`, without computing `beta(Z,W)`. Since the beta function can range over very large or very small values, its logarithm is sometimes more useful.

`Z` and `W` must be real and nonnegative. They must be the same size, or either can be scalar.

Examples

Compute Natural Log of Beta Function

Compute the natural logarithm of the beta function according to the value of `X` without directly computing the beta function. `beta(X,X)` results in floating point arithmetic underflow.

```
X = 510;
betaln(X,X)
```

```
ans = -708.8616
```

Algorithms

```
betaln(z,w) = gammaln(z)+gammaln(w)-gammaln(z+w)
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`beta` | `betainc` | `gammaln`

Introduced before R2006a

between

Calendar math differences

Syntax

```
dt = between(t1,t2)
dt = between(t1,t2,components)
```

Description

`dt = between(t1,t2)` returns the differences between the datetime values in `t1` and `t2`. The `dt` output is a `calendarDuration` array in terms of the calendar components years, months, days, and time, such that `t2 = t1+dt`.

`dt = between(t1,t2,components)` returns the differences between datetime values in terms of the specified calendar or time components.

Examples

Differences Between Two Datetime Arrays

Create two `datetime` arrays.

```
t1 = datetime('now')
```

```
t1 = datetime
   24-Feb-2017 14:10:44
```

```
t2 = datetime('tomorrow','Format','dd-MMM-yyyy HH:mm:ss') + caldays(0:2)
```

```
t2 = 1×3 datetime array
   25-Feb-2017 00:00:00   26-Feb-2017 00:00:00   27-Feb-2017 00:00:00
```

Find the difference between the two arrays.

```
dt = between(t1,t2)
```

```
dt = 1×3 calendarDuration array
      9h 49m 15.656s   1d 9h 49m 15.656s   2d 9h 49m 15.656s
```

`between` returns a `calendarDuration` array containing differences in terms of days, hours, minutes, and seconds.

Difference Between Datetime Values in Calendar Days

Create a sequence of datetimes over a 6-month period. Then, find the number of days between the first date and each of the dates in the sequence.

```
t1 = datetime(2013,1,1);
t2 = dateshift(t1,'end','month',0:4)
```

```
t2 = 1×5 datetime array
   31-Jan-2013   28-Feb-2013   31-Mar-2013   30-Apr-2013   31-May-2013
```

```
dt = between(t1,t2,'Days')
```

```
dt = 1×5 calendarDuration array
    30d    58d    89d   119d   150d
```

Input Arguments

`t1` — Input date and time

`datetime` array | character vector | cell array of character vectors

Input date and time, specified as a `datetime` array, character vector, or cell array of character vectors. At least one of inputs `t1` and `t2` must be a `datetime` array. `t1` and `t2` must be the same size unless one is a scalar.

`t2` — Input date and time

`datetime` array | character vector | cell array of character vectors

Input date and time, specified as a `datetime` array, character vector, or cell array of character vectors. At least one of inputs `t1` and `t2` must be a `datetime` array. `t1` and `t2` must be the same size unless one is a scalar.

`components` — Calendar or time components

`'years'` | `'quarters'` | `'months'` | `'weeks'` | `'days'` | `'time'` | cell array of character vectors

Calendar or time components, specified as one of the following character vectors, or a cell array containing one or more of these character vectors:

- `'years'`
- `'quarters'`
- `'months'`
- `'weeks'`
- `'days'`
- `'time'`

Except for `'time'`, the above components are flexible lengths of time. For example, 1 month represents a different length of time when added to a datetime in January than when added to a datetime in February.

`between` operates on the calendar or time components in decreasing order, starting with the largest component.

In general, `t2` is not equal to `t1 + dt`, unless you include `'time'` in `components`.

Example: `{'years','quarters'}`

Data Types: `char` | `cell`

Output Arguments

`dt` — Difference array

`calendarDuration` array

Difference array, returned as a `calendarDuration` array.

Tips

- To compute differences between datetime values in `t1` and `t2` as exact, fixed-length durations, use `t2-t1`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`caldiff` | `calendarDuration` | `diff` | `minus`

Introduced in R2014b

bicg

Biconjugate gradients method

Syntax

```
x = bicg(A,b)
bicg(A,b,tol)
bicg(A,b,tol,maxit)
bicg(A,b,tol,maxit,M)
bicg(A,b,tol,maxit,M1,M2)
bicg(A,b,tol,maxit,M1,M2,x0)
[x,flag] = bicg(A,b,...)
[x,flag,relres] = bicg(A,b,...)
[x,flag,relres,iter] = bicg(A,b,...)
[x,flag,relres,iter,resvec] = bicg(A,b,...)
```

Description

`x = bicg(A,b)` attempts to solve the system of linear equations `A*x = b` for `x`. The `n`-by-`n` coefficient matrix `A` must be square and should be large and sparse. The column vector `b` must have length `n`. `A` can be a function handle, `afun`, such that `afun(x,'notransp')` returns `A*x` and `afun(x,'transp')` returns `A'*x`.

"Parameterizing Functions" explains how to provide additional parameters to the function `afun`, as well as the preconditioner function `mfun` described below, if necessary.

If `bicg` converges, it displays a message to that effect. If `bicg` fails to converge after the maximum number of iterations or halts for any reason, it prints a warning message that includes the relative residual `norm(b-A*x)/norm(b)` and the iteration number at which the method stopped or failed.

`bicg(A,b,tol)` specifies the tolerance of the method. If `tol` is `[]`, then `bicg` uses the default, `1e-6`.

`bicg(A,b,tol,maxit)` specifies the maximum number of iterations. If `maxit` is `[]`, then `bicg` uses the default, `min(n,20)`.

`bicg(A,b,tol,maxit,M)` and `bicg(A,b,tol,maxit,M1,M2)` use the preconditioner `M` or `M = M1*M2` and effectively solve the system `inv(M)*A*x = inv(M)*b` for `x`. If `M` is `[]` then `bicg` applies no preconditioner. `M` can be a function handle `mfun`, such that `mfun(x,'notransp')` returns `M\x` and `mfun(x,'transp')` returns `M'\x`.

`bicg(A,b,tol,maxit,M1,M2,x0)` specifies the initial guess. If `x0` is `[]`, then `bicg` uses the default, an all-zero vector.

`[x,flag] = bicg(A,b,...)` also returns a convergence flag.

Flag	Convergence
0	`bicg` converged to the desired tolerance `tol` within `maxit` iterations.
1	`bicg` iterated `maxit` times but did not converge.
2	Preconditioner `M` was ill-conditioned.
3	`bicg` stagnated. (Two consecutive iterates were the same.)
4	One of the scalar quantities calculated during `bicg` became too small or too large to continue computing.

Whenever `flag` is not `0`, the solution `x` returned is that with minimal norm residual computed over all the iterations. No messages are displayed if the `flag` output is specified.

`[x,flag,relres] = bicg(A,b,...)` also returns the relative residual `norm(b-A*x)/norm(b)`. If `flag` is `0`, `relres <= tol`.

`[x,flag,relres,iter] = bicg(A,b,...)` also returns the iteration number at which `x` was computed, where `0 <= iter <= maxit`.

`[x,flag,relres,iter,resvec] = bicg(A,b,...)` also returns a vector of the residual norms at each iteration including `norm(b-A*x0)`.

Examples

Using bicg with a Matrix Input

This example shows how to use `bicg` with a matrix input. `bicg`. The following code:

```
n = 100;
```

```
on = ones(n,1);
A = spdiags([-2*on 4*on -on],-1:1,n,n);
b = sum(A,2);
tol = 1e-8;
maxit = 15;
M1 = spdiags([on/(-2) on],-1:0,n,n);
M2 = spdiags([4*on -on],0:1,n,n);

x = bicg(A,b,tol,maxit,M1,M2);
```

displays this message:

```
bicg converged at iteration 9 to a solution with relative
residual 5.3e-009
```

Using bicg with a Function Handle

This example replaces the matrix A in the previous example with a handle to a matrix-vector product function `afun`. The example is contained in a file `run_bicg` that

- Calls `bicg` with the `@afun` function handle as its first argument.
- Contains `afun` as a nested function, so that all variables in `run_bicg` are available to `afun`.

Place the following into a file called `run_bicg`:

```
function x1 = run_bicg
n = 100;
on = ones(n,1);
b = afun(on,'notransp');
tol = 1e-8;
maxit = 15;
M1 = spdiags([on/(-2) on],-1:0,n,n);
M2 = spdiags([4*on -on],0:1,n,n);
x1 = bicg(@afun,b,tol,maxit,M1,M2);

    function y = afun(x,transp_flag)
       if strcmp(transp_flag,'transp')      % y = A'*x
          y = 4 * x;
          y(1:n-1) = y(1:n-1) - 2 * x(2:n);
          y(2:n) = y(2:n) - x(1:n-1);
       elseif strcmp(transp_flag,'notransp') % y = A*x
          y = 4 * x;
          y(2:n) = y(2:n) - 2 * x(1:n-1);
```

```
            y(1:n-1) = y(1:n-1) - x(2:n);
        end
    end
end
```

When you enter

```
x1 = run_bicg;
```

MATLAB software displays the message

```
bicg converged at iteration 9 to a solution with ...
relative residual
5.3e-009
```

Using bicg with a Preconditioner

This example demonstrates the use of a preconditioner.

Load `A = west0479`, a real 479-by-479 nonsymmetric sparse matrix.

```
load west0479;
A = west0479;
```

Define `b` so that the true solution is a vector of all ones.

```
b = full(sum(A,2));
```

Set the tolerance and maximum number of iterations.

```
tol = 1e-12;
maxit = 20;
```

Use `bicg` to find a solution at the requested tolerance and number of iterations.

```
[x0,fl0,rr0,it0,rv0] = bicg(A,b,tol,maxit);
```

`fl0` is 1 because `bicg` does not converge to the requested tolerance `1e-12` within the requested 20 iterations. In fact, the behavior of `bicg` is so poor that the initial guess (`x0 = zeros(size(A,2),1)`) is the best solution and is returned as indicated by `it0 = 0`. MATLAB® stores the residual history in `rv0`.

Plot the behavior of `bicg`.

```
semilogy(0:maxit,rv0/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

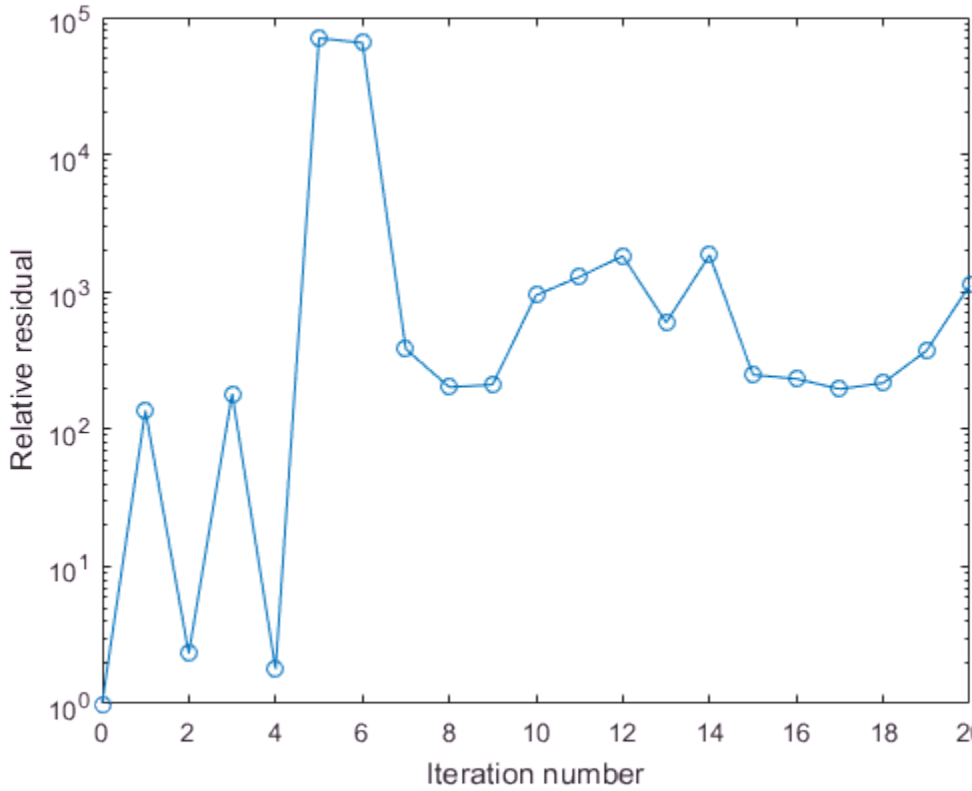

The plot shows that the solution does not converge. You can use a preconditioner to improve the outcome.

Create the preconditioner with `ilu`, since the matrix `A` is nonsymmetric.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-5));
```

```
Error using ilu

There is a pivot equal to zero. Consider decreasing

the drop tolerance or consider using the 'udiag' option.
```

MATLAB cannot construct the incomplete LU as it would result in a singular factor, which is useless as a preconditioner.

You can try again with a reduced drop tolerance, as indicated by the error message.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-6));
[x1,fl1,rr1,it1,rv1] = bicg(A,b,tol,maxit,L,U);
```

`fl1` is 0 because `bicg` drives the relative residual to `4.1410e-014` (the value of `rr1`). The relative residual is less than the prescribed tolerance of `1e-12` at the sixth iteration (the value of `it1`) when preconditioned by the incomplete LU factorization with a drop tolerance of `1e-6`. The output `rv1(1)` is `norm(b)`, and the output `rv1(7)` is `norm(b-A*x2)`.

You can follow the progress of `bicg` by plotting the relative residuals at each iteration starting from the initial estimate (iterate number 0).

```
semilogy(0:it1,rv1/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

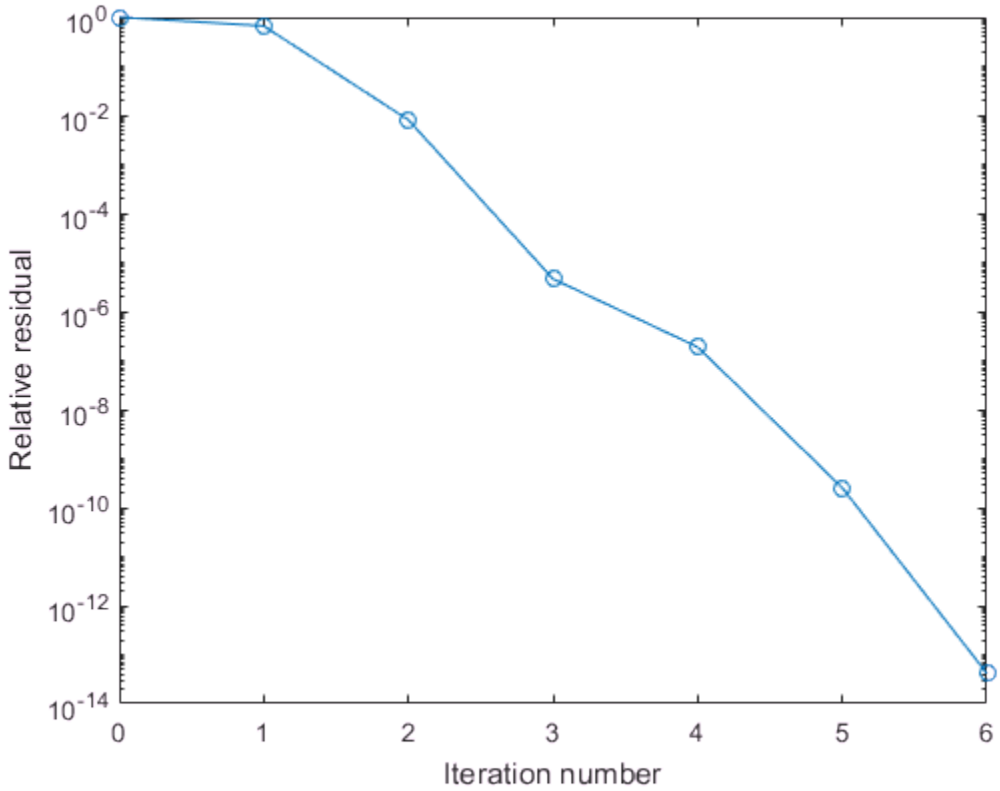

References

[1] Barrett, R., M. Berry, T.F. Chan, et al., *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*, SIAM, Philadelphia, 1994.

See Also

See Also

`bicgstab` | `cgs` | `gmres` | `ilu` | `lsqr` | `minres` | `mldivide` | `pcg` | `qmr` | `symmlq`

Topics

"Create Function Handle"

Introduced before R2006a

bicgstab

Biconjugate gradients stabilized method

Syntax

```
x = bicgstab(A,b)
bicgstab(A,b,tol)
bicgstab(A,b,tol,maxit)
bicgstab(A,b,tol,maxit,M)
bicgstab(A,b,tol,maxit,M1,M2)
bicgstab(A,b,tol,maxit,M1,M2,x0)
[x,flag] = bicgstab(A,b,...)
[x,flag,relres] = bicgstab(A,b,...)
[x,flag,relres,iter] = bicgstab(A,b,...)
[x,flag,relres,iter,resvec] = bicgstab(A,b,...)
```

Description

`x = bicgstab(A,b)` attempts to solve the system of linear equations `A*x=b` for `x`. The `n`-by-`n` coefficient matrix `A` must be square and should be large and sparse. The column vector `b` must have length `n`. `A` can be a function handle, `afun`, such that `afun(x)` returns `A*x`.

"Parameterizing Functions" explains how to provide additional parameters to the function `afun`, as well as the preconditioner function `mfun` described below, if necessary.

If `bicgstab` converges, a message to that effect is displayed. If `bicgstab` fails to converge after the maximum number of iterations or halts for any reason, a warning message is printed displaying the relative residual `norm(b-A*x)/norm(b)` and the iteration number at which the method stopped or failed.

`bicgstab(A,b,tol)` specifies the tolerance of the method. If `tol` is `[]`, then `bicgstab` uses the default, `1e-6`.

`bicgstab(A,b,tol,maxit)` specifies the maximum number of iterations. If `maxit` is `[]`, then `bicgstab` uses the default, `min(n,20)`.

`bicgstab(A,b,tol,maxit,M)` and `bicgstab(A,b,tol,maxit,M1,M2)` use preconditioner `M` or `M = M1*M2` and effectively solve the system `inv(M)*A*x = inv(M)*b` for `x`. If `M` is `[]` then `bicgstab` applies no preconditioner. `M` can be a function handle `mfun`, such that `mfun(x)` returns `M\x`.

`bicgstab(A,b,tol,maxit,M1,M2,x0)` specifies the initial guess. If `x0` is `[]`, then `bicgstab` uses the default, an all zero vector.

`[x,flag] = bicgstab(A,b,...)` also returns a convergence flag.

Flag	Convergence
0	`bicgstab` converged to the desired tolerance `tol` within `maxit` iterations.
1	`bicgstab` iterated `maxit` times but did not converge.
2	Preconditioner `M` was ill-conditioned.
3	`bicgstab` stagnated. (Two consecutive iterates were the same.)
4	One of the scalar quantities calculated during `bicgstab` became too small or too large to continue computing.

Whenever `flag` is not `0`, the solution `x` returned is that with minimal norm residual computed over all the iterations. No messages are displayed if the `flag` output is specified.

`[x,flag,relres] = bicgstab(A,b,...)` also returns the relative residual `norm(b-A*x)/norm(b)`. If `flag` is `0`, `relres <= tol`.

`[x,flag,relres,iter] = bicgstab(A,b,...)` also returns the iteration number at which `x` was computed, where `0 <= iter <= maxit`. `iter` can be an integer + 0.5, indicating convergence halfway through an iteration.

`[x,flag,relres,iter,resvec] = bicgstab(A,b,...)` also returns a vector of the residual norms at each half iteration, including `norm(b-A*x0)`.

Examples

Using bicgstab with a Matrix Input

This example first solves `Ax = b` by providing `A` and the preconditioner `M1` directly as arguments.

The code:

```
A = gallery('wilk',21);
b = sum(A,2);
tol = 1e-12;
maxit = 15;
M1 = diag([10:-1:1 1 1:10]);

x = bicgstab(A,b,tol,maxit,M1);
```

displays the message:

```
bicgstab converged at iteration 12.5 to a solution with relative
residual 2e-014.
```

Using bicgstab with a Function Handle

This example replaces the matrix `A` in the previous example with a handle to a matrix-vector product function `afun`, and the preconditioner `M1` with a handle to a backsolve function `mfun`. The example is contained in a file `run_bicgstab` that

- Calls `bicgstab` with the function handle `@afun` as its first argument.
- Contains `afun` and `mfun` as nested functions, so that all variables in `run_bicgstab` are available to `afun` and `mfun`.

The following shows the code for `run_bicgstab`:

```
function x1 = run_bicgstab
n = 21;
b = afun(ones(n,1));
tol = 1e-12;
maxit = 15;
x1 = bicgstab(@afun,b,tol,maxit,@mfun);

    function y = afun(x)
       y = [0; x(1:n-1)] + ...
           [((n-1)/2:-1:0)'; (1:(n-1)/2)'].*x + ...
           [x(2:n); 0];
    end

    function y = mfun(r)
        y = r ./ [((n-1)/2:-1:1)'; 1; (1:(n-1)/2)'];
```

```
    end
end
```

When you enter

```
x1 = run_bicgstab;
```

MATLAB software displays the message

```
bicgstab converged at iteration 12.5 to a solution with relative
residual 2e-014.
```

Using bicgstab with a Preconditioner

This example demonstrates the use of a preconditioner.

Load `west0479`, a real 479-by-479 nonsymmetric sparse matrix.

```
load west0479;
A = west0479;
```

Define `b` so that the true solution is a vector of all ones.

```
b = full(sum(A,2));
```

Set the tolerance and maximum number of iterations.

```
tol = 1e-12;
maxit = 20;
```

Use `bicgstab` to find a solution at the requested tolerance and number of iterations.

```
[x0,fl0,rr0,it0,rv0] = bicgstab(A,b,tol,maxit);
```

`fl0` is 1 because `bicgstab` does not converge to the requested tolerance `1e-12` within the requested 20 iterations. In fact, the behavior of `bicgstab` is so bad that the initial guess (`x0 = zeros(size(A,2),1)`) is the best solution and is returned as indicated by `it0 = 0`. MATLAB® stores the residual history in `rv0`.

Plot the behavior of `bicgstab`.

```
semilogy(0:0.5:maxit,rv0/norm(b),'-o');
```

```
xlabel('Iteration number');
ylabel('Relative residual');
```

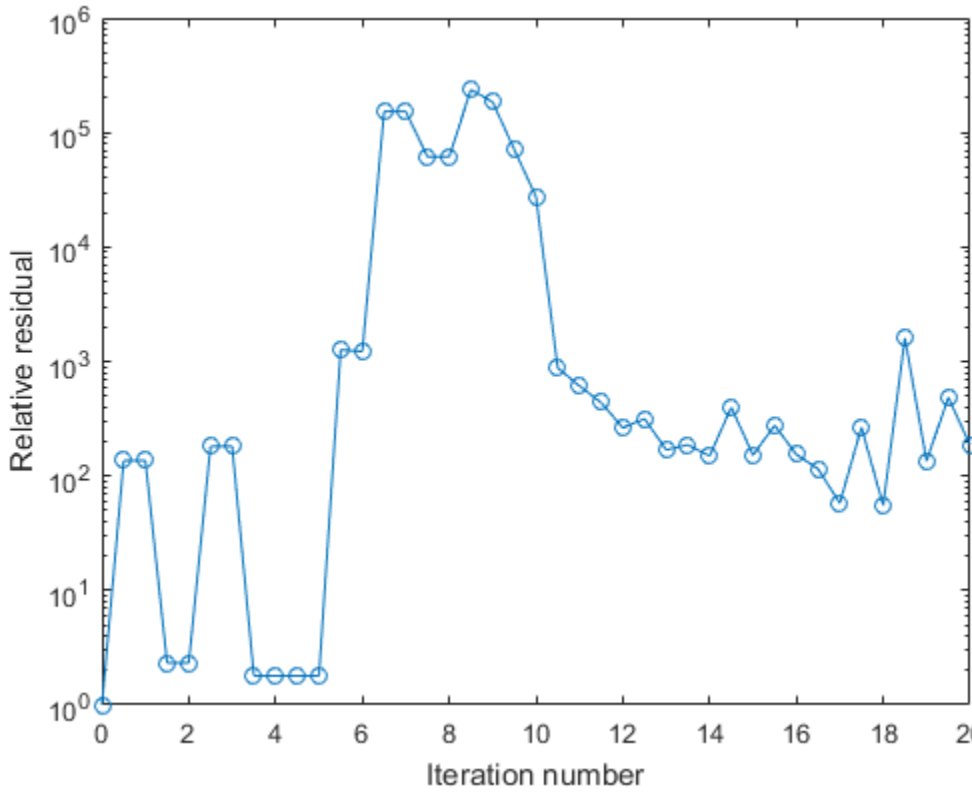

The plot shows that the solution does not converge. You can use a preconditioner to improve the outcome.

Create a preconditioner with `ilu`, since `A` is nonsymmetric.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-5));
```

```
Error using ilu
There is a pivot equal to zero. Consider decreasing
the drop tolerance or consider using the 'udiag' option.
```

MATLAB cannot construct the incomplete LU as it would result in a singular factor, which is useless as a preconditioner.

You can try again with a reduced drop tolerance, as indicated by the error message.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-6));
[x1,fl1,rr1,it1,rv1] = bicgstab(A,b,tol,maxit,L,U);
```

`fl1` is 0 because `bicgstab` drives the relative residual to `5.9829e-014` (the value of `rr1`). The relative residual is less than the prescribed tolerance of `1e-12` at the third iteration (the value of `it1`) when preconditioned by the incomplete LU factorization with a drop tolerance of `1e-6`. The output `rv1(1)` is `norm(b)` and the output `rv1(7)` is `norm(b-A*x2)` since `bicgstab` uses half iterations.

You can follow the progress of `bicgstab` by plotting the relative residuals at each iteration starting from the initial estimate (iterate number 0).

```
semilogy(0:0.5:it1,rv1/norm(b),'-o');
xlabel('Iteration Number');
ylabel('Relative Residual');
```

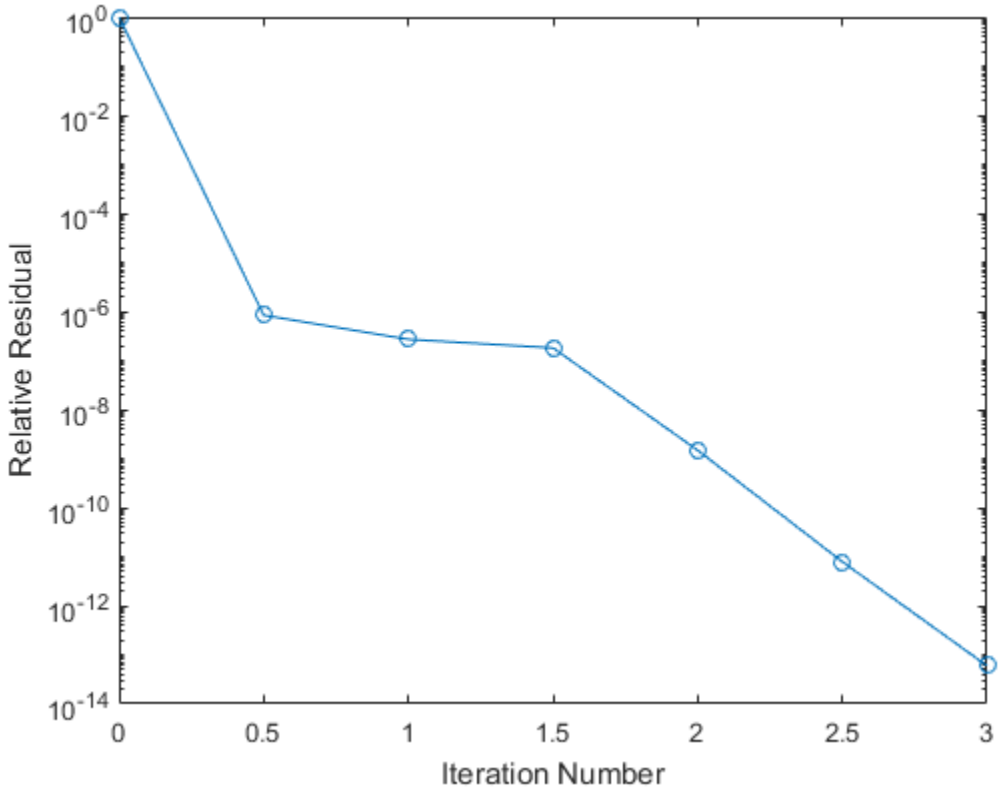

References

[1] Barrett, R., M. Berry, T.F. Chan, et al., *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*, SIAM, Philadelphia, 1994.

[2] van der Vorst, H.A., "BI-CGSTAB: A fast and smoothly converging variant of BI-CG for the solution of nonsymmetric linear systems," *SIAM J. Sci. Stat. Comput.*, March 1992, Vol. 13, No. 2, pp. 631–644.

See Also

See Also

`bicg` | `cgs` | `gmres` | `ilu` | `lsqr` | `minres` | `mldivide` | `pcg` | `qmr` | `symmlq`

Topics

"Create Function Handle"

Introduced before R2006a

bicgstabl

Biconjugate gradients stabilized (l) method

Syntax

```
x = bicgstabl(A,b)
x = bicgstabl(afun,b)
x = bicgstabl(A,b,tol)
x = bicgstabl(A,b,tol,maxit)
x = bicgstabl(A,b,tol,maxit,M)
x = bicgstabl(A,b,tol,maxit,M1,M2)
x = bicgstabl(A,b,tol,maxit,M1,M2,x0)
[x,flag] = bicgstabl(A,b,...)
[x,flag,relres] = bicgstabl(A,b,...)
[x,flag,relres,iter] = bicgstabl(A,b,...)
[x,flag,relres,iter,resvec] = bicgstabl(A,b,...)
```

Description

`x = bicgstabl(A,b)` attempts to solve the system of linear equations `A*x=b` for `x`. The `n`-by-`n` coefficient matrix `A` must be square and the right-hand side column vector `b` must have length `n`.

`x = bicgstabl(afun,b)` accepts a function handle `afun` instead of the matrix `A`. `afun(x)` accepts a vector input `x` and returns the matrix-vector product `A*x`. In all of the following syntaxes, you can replace `A` by `afun`.

`x = bicgstabl(A,b,tol)` specifies the tolerance of the method. If `tol` is [] then `bicgstabl` uses the default, 1e-6.

`x = bicgstabl(A,b,tol,maxit)` specifies the maximum number of iterations. If `maxit` is [] then `bicgstabl` uses the default, `min(N,20)`.

`x = bicgstabl(A,b,tol,maxit,M)` and `x = bicgstabl(A,b,tol,maxit,M1,M2)` use preconditioner `M` or `M=M1*M2` and effectively solve the system `A*inv(M)*x = b` for

x. If M is [] then a preconditioner is not applied. M may be a function handle returning M \x.

x = bicgstabl(A,b,tol,maxit,M1,M2,x0) specifies the initial guess. If x0 is [] then bicgstabl uses the default, an all zero vector.

[x,flag] = bicgstabl(A,b,...) also returns a convergence flag:

Flag	Convergence
0	bicgstabl converged to the desired tolerance tol within maxit iterations.
1	bicgstabl iterated maxit times but did not converge.
2	Preconditioner M was ill-conditioned.
3	bicgstabl stagnated. (Two consecutive iterates were the same.)
4	One of the scalar quantities calculated during bicgstabl became too small or too large to continue computing.

[x,flag,relres] = bicgstabl(A,b,...) also returns the relative residual norm(b-A*x)/norm(b). If flag is 0, relres <= tol.

[x,flag,relres,iter] = bicgstabl(A,b,...) also returns the iteration number at which x was computed, where 0 <= iter <= maxit. iter can be k/4 where k is some integer, indicating convergence at a given quarter iteration.

[x,flag,relres,iter,resvec] = bicgstabl(A,b,...) also returns a vector of the residual norms at each quarter iteration, including norm(b-A*x0).

Examples

Using bicgstabl with Inputs or with a Function

You can pass inputs directly to bicgstabl:

```
n = 21;
A = gallery('wilk',n);
b = sum(A,2);
```

```
tol = 1e-12;
maxit = 15;
M = diag([10:-1:1 1 1:10]);
x = bicgstabl(A,b,tol,maxit,M);
```

You can also use a matrix-vector product function:

```
function y = afun(x,n)
y = [0; x(1:n-1)] + [((n-1)/2:-1:0)';
(1:(n-1)/2)'].*x+[x(2:n); 0];
```

and a preconditioner backsolve function:

```
function y = mfun(r,n)
y = r ./ [((n-1)/2:-1:1)';
1;
(1:(n-1)/2)'];
```

as inputs to `bicgstabl`:

```
x1 = bicgstabl(@(x)afun(x,n),b,tol,maxit,@(x)mfun(x,n));
```

Using bicgstabl with a Preconditioner

This example demonstrates the use of a preconditioner.

Load `west0479`, a real 479-by-479 nonsymmetric sparse matrix.

```
load west0479;
A = west0479;
```

Define `b` so that the true solution is a vector of all ones.

```
b = full(sum(A,2));
```

Set the tolerance and maximum number of iterations.

```
tol = 1e-12;
maxit = 20;
```

Use `bicgstabl` to find a solution at the requested tolerance and number of iterations.

```
[x0,fl0,rr0,it0,rv0] = bicgstabl(A,b,tol,maxit);
```

`fl0` is 1 because `bicgstabl` does not converge to the requested tolerance `1e-12` within the requested 20 iterations. In fact, the behavior of `bicgstabl` is so poor that the initial guess (`x0 = zeros(size(A,2),1)`) is the best solution and is returned as indicated by `it0 = 0`. MATLAB® stores the residual history in `rv0`.

Plot the behavior of `bicgstabl`.

```
semilogy(0:0.25:maxit,rv0/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

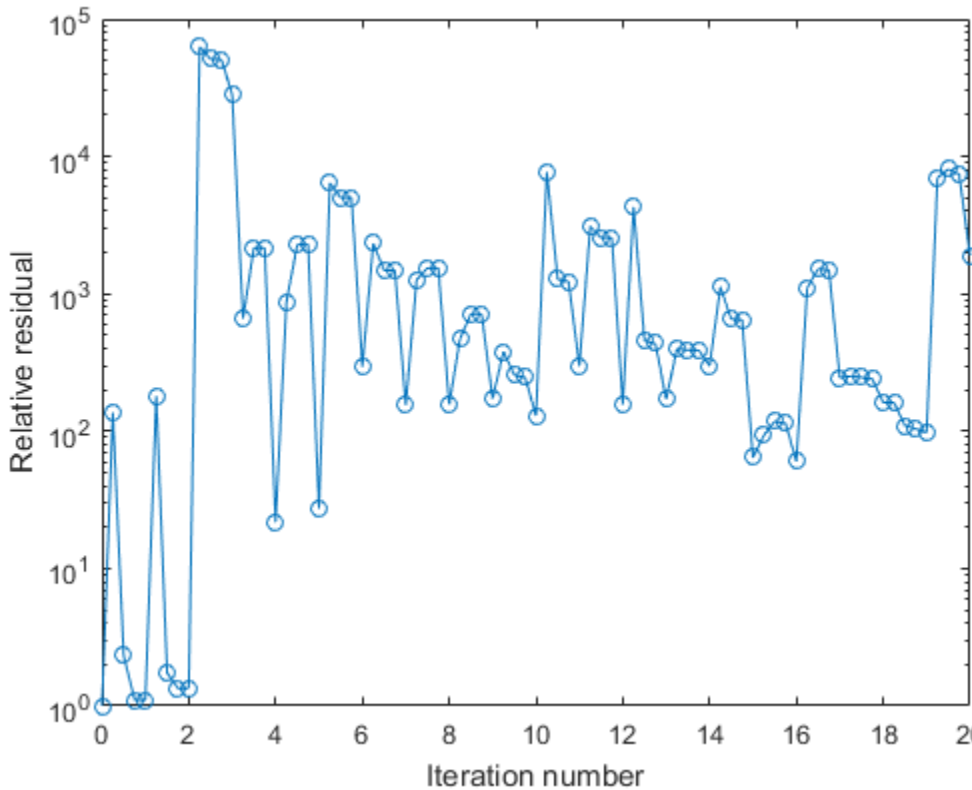

The plot shows that the solution does not converge. You can use a preconditioner to improve the outcome.

Create a preconditioner with `ilu`, since `A` is nonsymmetric.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-5));
```

```
Error using ilu
There is a pivot equal to zero.  Consider decreasing the
drop tolerance or consider using the 'udiag' option.
```

MATLAB cannot construct the incomplete LU as it would result in a singular factor, which is useless as a preconditioner.

You can try again with a reduced drop tolerance, as indicated by the error message.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-6));
[x1,fl1,rr1,it1,rv1] = bicgstabl(A,b,tol,maxit,L,U);
```

`fl1` is 0 because `bicgstabl` drives the relative residual to `1.0257e-015` (the value of `rr1`). The relative residual is less than the prescribed tolerance of `1e-12` at the sixth iteration (the value of `it1`) when preconditioned by the incomplete LU factorization with a drop tolerance of `1e-6`. The output `rv1(1)` is `norm(b)`, and the output `rv1(9)` is `norm(b-A*x2)` since `bicgstabl` uses quarter iterations.

You can follow the progress of `bicgstabl` by plotting the relative residuals at each iteration starting from the initial estimate (iterate number 0).

```
semilogy(0:0.25:it1,rv1/norm(b),'-o');

h = gca;
h.XTick = 0:0.25:it1;

xlabel('Iteration number');
ylabel('Relative residual');
```

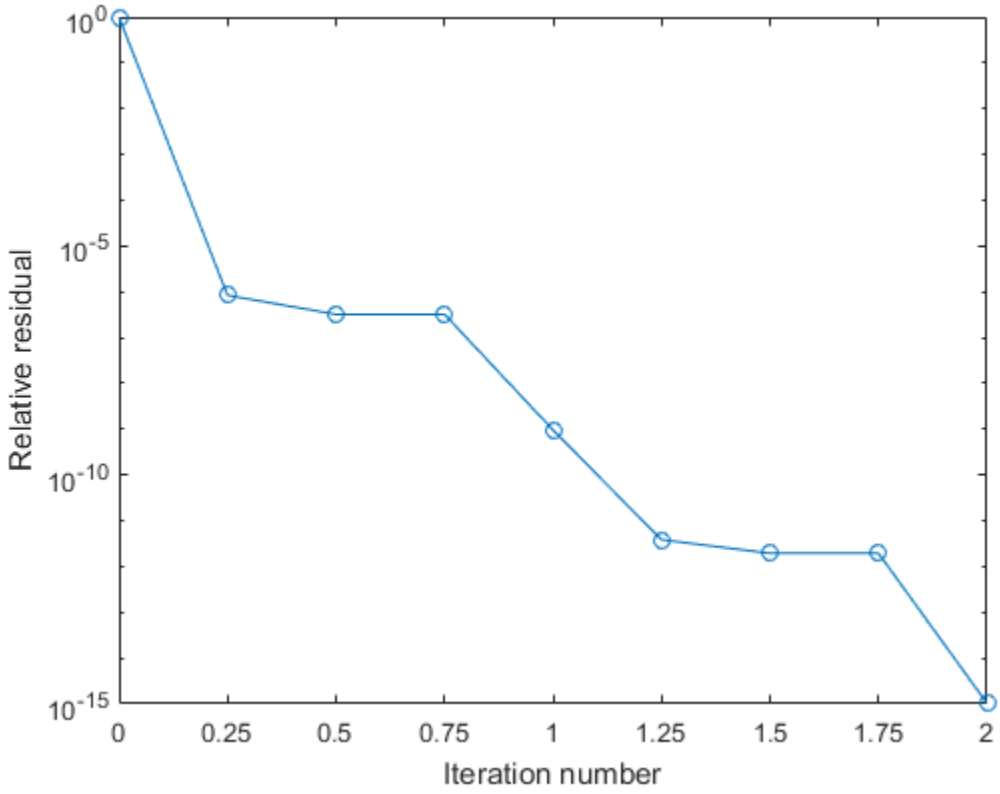

See Also

See Also

`bicg` | `bicgstab` | `cgs` | `gmres` | `ilu` | `lsqr` | `minres` | `mldivide` | `pcg` | `qmr` | `symmlq`

Topics

"Create Function Handle"

bin2dec

Convert text representation of binary number to decimal number

Syntax

`bin2dec(binarystr)`

Description

`bin2dec(binarystr)` interprets *`binarystr`*, text that represents a binary number, and returns the equivalent decimal number. *`binarystr`* must represent a nonnegative integer value smaller than or equal to the value returned by `flintmax`.

`binarystr` can be a character array or a cell array of character vectors. `bin2dec` ignores any space (`' '`) characters in the input text.

Examples

Binary `010111` converts to decimal `23`:

```
bin2dec('010111')
ans =
    23
```

Because space characters are ignored, this string yields the same result:

```
bin2dec(' 010   111 ')
ans =
    23
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input text must be specified as a character array. Cell arrays are not supported.
- When the input is empty, the answer does not match the answer in MATLAB.

See Also

`dec2bin` | `hex2dec` | `base2dec` | `flintmax`

binary

Class: FTP

Set FTP transfer type to binary

Syntax

```
binary(ftpobj)
```

Description

`binary(ftpobj)` sets the FTP download and upload mode to binary, which does not convert new line characters. Binary mode is the default for FTP objects. If you previously called the `ascii` method, use this method before transferring a nontext file, such as an executable or ZIP archive.

Input Arguments

`ftpobj`

FTP object created by ftp.

Examples

Connect to the National Geophysical Data Center (NGDC) FTP server, and set the transfer mode to binary:

```
ngdc = ftp('ftp.ngdc.noaa.gov');
binary(ngdc)
```

FTP service courtesy of the NGDC. See NGDC Privacy Policy, Disclaimer, and Copyright for NGDC terms of service.

See Also

ascii | ftp

Introduced before R2006a

bitand

Bit-wise AND

Syntax

```
C = bitand(A,B)
C = bitand(A,B,assumedtype)

objout = bitand(netobj1,netobj2)
```

Description

`C = bitand(A,B)` returns the bit-wise AND of `A` and `B`.

`C = bitand(A,B,assumedtype)` assumes that `A` and `B` are of `assumedtype`.

`objout = bitand(netobj1,netobj2)` returns the bit-wise AND of the .NET enumeration objects `netobj1` and `netobj2`.

Examples

Truth Table

Create a truth table for the logical AND operation.

```
A = uint8([0 1; 0 1]);
B = uint8([0 0; 1 1]);
TTable = bitand(A, B)
```

```
TTable = 2×2 uint8 matrix

   0   0
   0   1
```

`bitand` returns 1 only if both bit-wise inputs are 1.

Negative Values

Explore how `bitand` handles negative values.

MATLAB® encodes signed integers using two's complement. Thus, the bit-wise AND of -5 (11111011) and 6 (00000110) is 2 (00000010).

```
C = -5;
D = 6;
bitand(C,D,'int8')
```

```
ans = 2
```

- "Creating .NET Enumeration Bit Flags"

Input Arguments

`A,B` — Input values
scalars | vectors | matrices | multidimensional arrays

Input values, specified as scalars, vectors, matrices, or multidimensional arrays. Inputs `A` and `B` must either be the same size or have sizes that are compatible (for example, `A` is an `M`-by-`N` matrix and `B` is a scalar or `1`-by-`N` row vector). For more information, see "Compatible Array Sizes for Basic Operations". `A` and `B` also must be the same data type unless one is a scalar double.

- If `A` and `B` are double arrays, and `assumedtype` is not specified, then MATLAB treats `A` and `B` as unsigned 64-bit integers.
- If `assumedtype` is specified, then all elements in `A` and `B` must have integer values within the range of `assumedtype`.

Data Types: `double` | `logical` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`assumedtype` — Assumed data type of `integ1` and `integ2`
`'uint64'` | `'uint32'` | `'uint16'` | `'uint8'` | `'int64'` | `'int32'` | `'int16'` | `'int8'`

Assumed data type of A and B, specified as `'uint64'`, `'uint32'`, `'uint16'`, `'uint8'`, `'int64'`, `'int32'`, `'int16'`, or `'int8'`.

- If A and B are double arrays, then `assumedtype` can specify any valid integer type, but defaults to `'uint64'`.
- If A and B are integer type arrays, then `assumedtype` must specify that same integer type.

`netobj1`, `netobj2` — Input values
.NET enumeration objects

Input values, specified as .NET enumeration objects. You must be running a version of Windows to use .NET enumeration objects as input arguments.

`bitand` is an instance method for MATLAB enumeration objects created from a .NET enumeration.

Output Arguments

C — Bit-wise AND result
array

Bit-wise AND result, returned as an array. C is the same data type as A and B.

- If either A or B is a scalar double, and the other is an integer type, then C is the integer type.

`objout` — Bit-wise AND result
.NET enumeration object

Bit-wise AND result, returned as a .NET enumeration objects.

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`bitcmp` | `bitget` | `bitnot` | `bitor` | `bitset` | `bitshift` | `bitxor` | `intmax`

Topics

"Creating .NET Enumeration Bit Flags"

Introduced before R2006a

bitcmp

Bit-wise complement

Syntax

```
cmp = bitcmp(A)
cmp = bitcmp(A,assumedtype)
```

Description

`cmp = bitcmp(A)` returns the bit-wise complement of `A`.

`cmp = bitcmp(A,assumedtype)` assumes that `A` is of `assumedtype`.

Examples

Complement of a Negative Integer

```
A = int8(-11);
cmp = bitcmp(A)
```

```
cmp = int8
    10
```

You can see the complement operation when the numbers are shown in binary.

```
original = bitget(A,8:-1:1)
```

```
original = 1×8 int8 row vector

   1   1   1   1   0   1   0   1
```

```
complement = bitget(bitcmp(A),8:-1:1)
```

```
complement = 1×8 int8 row vector

   0   0   0   0   1   0   1   0
```

Complement of Unsigned Integers

```
cmp = bitcmp(64,'uint8')
```

```
cmp = 191
```

```
maxint = intmax('uint8') - 64
```

```
maxint = uint8
    191
```

The complement of an unsigned integer is equal to itself subtracted from the maximum integer of its data type.

Input Arguments

A — Input value

signed integer array | unsigned integer array | double array

Input value, specified as a signed integer array, unsigned integer array, or double array.

- If A is a double array, and `assumedtype` is not specified, then MATLAB treats A as an unsigned 64-bit integer.
- If `assumedtype` is specified, then all elements in A must have integer values within the range of `assumedtype`.

Data Types: `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`assumedtype` — Assumed data type of A

`'uint64'` | `'uint32'` | `'uint16'` | `'uint8'` | `'int64'` | `'int32'` | `'int16'` | `'int8'`

Assumed data type of A, specified as `'uint64'`, `'uint32'`, `'uint16'`, `'uint8'`, `'int64'`, `'int32'`, `'int16'`, or `'int8'`.

- If A is a double array, then `assumedtype` can specify any valid integer type, but defaults to `'uint64'`.

- If A is an integer type array, then `assumedtype` must specify that same integer type.

Data Types: `char`

Output Arguments

`cmp` — Bit-wise complement
signed integer array | unsigned integer array | double array

Bit-wise complement, returned as a signed integer array, unsigned integer array, or double array. `cmp` is the same size and type as A.

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also
`bitand` | `bitget` | `bitor` | `bitset` | `bitshift` | `bitxor` | `intmax`

Introduced before R2006a

bitget

Get bit at specified position

Syntax

```
b = bitget(A,bit)
b = bitget(A,bit,assumedtype)
```

Description

`b = bitget(A,bit)` returns the bit value at position `bit` in integer array `A`.

`b = bitget(A,bit,assumedtype)` assumes that `A` is of `assumedtype`.

Examples

Maximum Integer

Find the difference in the binary representation between the maximum integer of signed and unsigned integers.

```
a1 = intmax('int8');
a2 = intmax('uint8');
b1 = bitget(a1,8:-1:1)
```

```
b1 = 1×8 int8 row vector

   0   1   1   1   1   1   1   1
```

```
b2 = bitget(a2,8:-1:1)
```

```
b2 = 1×8 uint8 row vector

   1   1   1   1   1   1   1   1
```

The signed integers require a bit to accommodate negative integers.

Negative Numbers Using Two's Complement

Find the 8-bit representation of a negative number.

```
A = -29;
b = bitget(A,8:-1:1,'int8')
```

```
b =

     1     1     1     0     0     0     1     1
```

Input Arguments

A — Input values

array

Input values, specified as an array. A can be a scalar or an array of the same size as `bit`.

- If A is a double array, and `assumedtype` is not specified, then MATLAB treats A as an unsigned 64-bit integer.
- If `assumedtype` is specified, then all elements in A must have integer values within the range of `assumedtype`.

Data Types: `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`bit` — Bit position

integer | integer array

Bit position, specified as an integer or integer array. `bit` can be a scalar or an array of the same size as A. `bit` must be between 1 (the least-significant bit) and the number of bits in the integer class of A.

Data Types: `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`assumedtype` — Assumed data type of A

`'uint64'` | `'uint32'` | `'uint16'` | `'uint8'` | `'int64'` | `'int32'` | `'int16'` | `'int8'`

Assumed data type of A, specified as `'uint64'`, `'uint32'`, `'uint16'`, `'uint8'`, `'int64'`, `'int32'`, `'int16'`, or `'int8'`.

- If A is a double array, then `assumedtype` can specify any valid integer type, but defaults to `'uint64'`.
- If A is an integer type array, then `assumedtype` must specify that same integer type.

Data Types: `char`

Output Arguments

b — Bit value at `bit`

array

Bit value at `bit`, returned as an array of 0s and 1s. b is the same data type as A.

- If A and `bit` are scalars, then b is also a scalar.
- If either A or `bit` is an array, then b is the same size as that array.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`bitand` | `bitcmp` | `bitor` | `bitset` | `bitshift` | `bitxor` | `intmax`

Introduced before R2006a

bitnot

.NET enumeration object bit-wise NOT instance method

Syntax

```
objout = bitnot(netobj)
```

Description

`objout = bitnot(netobj)` reverses all bits of the .NET enumeration objects `netobj`.

Examples

- "Creating .NET Enumeration Bit Flags"

Input Arguments

`netobj` — Input value
.NET enumeration objects

Input value, specified as .NET enumeration object. You must be running a version of Windows to use .NET enumeration objects as input arguments.

Output Arguments

`objout` — Bit-wise NOT result
.NET enumeration object

Bit-wise NOT result, returned as a .NET enumeration object.

Limitations

- The method is an instance method for MATLAB enumeration objects created from a .NET enumeration. This method does not have an equivalent MATLAB function.

See Also

See Also

`bitand` | `bitor` | `bitxor`

Topics

"Creating .NET Enumeration Bit Flags"

Introduced in R2011a

bitor

Bit-wise OR

Syntax

```
C = bitor(A,B)
C = bitor(A,B,assumedtype)

objout = bitor(netobj1,netobj2)
```

Description

`C = bitor(A,B)` returns the bit-wise OR of `A` and `B`.

`C = bitor(A,B,assumedtype)` assumes that `A` and `B` are of `assumedtype`.

`objout = bitor(netobj1,netobj2)` returns the bit-wise OR of the .NET enumeration objects `netobj1` and `netobj2`.

Examples

Truth Table

Create a truth table for the logical OR operation.

```
A = uint8([0 1; 0 1]);
B = uint8([0 0; 1 1]);
TTable = bitor(A, B)
```

```
TTable = 2×2 uint8 matrix

   0   1
   1   1
```

`bitor` returns 1 if either bit-wise input is 1.

Negative Values

Explore how `bitor` handles negative values.

MATLAB® encodes negative integers using two's complement. Thus, the bit-wise OR of -5 (11111010) and 6 (00000110) is -1 (11111110).

```
C = -5;
D = 6;
bitor(C,D,'int8')
```

```
ans = -1
```

- "Creating .NET Enumeration Bit Flags"

Input Arguments

A, B — Input values
scalars | vectors | matrices | multidimensional arrays

Input values, specified as scalars, vectors, matrices, or multidimensional arrays. Inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations". A and B also must be the same data type unless one is a scalar double.

- If A and B are double arrays, and `assumedtype` is not specified, then MATLAB treats A and B as unsigned 64-bit integers.
- If `assumedtype` is specified, then all elements in A and B must have integer values within the range of `assumedtype`.

Data Types: `double` | `logical` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`assumedtype` — Assumed data type of `integ1` and `integ2`
`'uint64'` | `'uint32'` | `'uint16'` | `'uint8'` | `'int64'` | `'int32'` | `'int16'` | `'int8'`

Assumed data type of A and B, specified as `'uint64'`, `'uint32'`, `'uint16'`, `'uint8'`, `'int64'`, `'int32'`, `'int16'`, or `'int8'`.

- If A and B are double arrays, then `assumedtype` can specify any valid integer type, but defaults to `'uint64'`.
- If A and B are integer type arrays, then `assumedtype` must specify that same integer type.

`netobj1`, `netobj2` — Input values
.NET enumeration objects

Input values, specified as .NET enumeration objects. You must be running a version of Windows to use .NET enumeration objects as input arguments.

`bitor` is an instance method for MATLAB enumeration objects created from a .NET enumeration.

Output Arguments

`C` — Bit-wise OR result
array

Bit-wise OR result, returned as an array. `C` is the same data type as `A` and `B`.

- If either `A` or `B` is a scalar double, and the other is an integer type, then `C` is the integer type.

`objout` — Bit-wise OR result
.NET enumeration object

Bit-wise OR result, returned as a .NET enumeration objects.

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`bitand` | `bitcmp` | `bitget` | `bitnot` | `bitset` | `bitshift` | `bitxor` | `intmax`

Topics

"Creating .NET Enumeration Bit Flags"

Introduced before R2006a

bitset

Set bit at specific location

Syntax

```
intout = bitset(A,bit)
intout = bitset(A,bit,assumedtype)

intout = bitset(A,bit,V)
intout = bitset(A,bit,V,assumedtype)
```

Description

`intout = bitset(A,bit)` returns the value of `A` with position `bit` set to 1 (on).

`intout = bitset(A,bit,assumedtype)` assumes `A` is of type `assumedtype`.

`intout = bitset(A,bit,V)` returns `A` with position `bit` set to the value of `V`.

- If `V` is zero, then the bit position `bit` is set to 0 (off).
- If `V` is nonzero, then the bit position `bit` is set to 1 (on).

`intout = bitset(A,bit,V,assumedtype)` assumes `A` is of type `assumedtype`.

Examples

Set Bits to On

Add powers of 2 onto a number.

```
A = 4;
intout = bitset(A,4:6)
```

```
intout =

    12    20    36
```

You can see that `bitset` sequentially turns on bits 4 through 6.

```
c = dec2bin(intout)
```

```
c = 3×6 char array
    '001100'
    '010100'
    '100100'
```

Out of Range of Integer Type

MATLAB® throws an error if you specify an integer outside the range of `assumedtype`. For instance, `bitset(300,5,'int8')` returns an error since the maximum value of an `int8` integer is 127.

Avoid this error by limiting your input to the range of the specified datatype.

```
intout = bitset(75,5,'int8')
```

```
intout = 91
```

Set Bits to Off

Repeatedly subtract powers of 2 from a number.

```
a = intmax('uint8')
```

```
a = uint8
    255
```

```
for k = 0:7
   a = bitset(a, 8-k, 0);
   b(1,k+1) = a;
end
b
```

```
b = 1×8 uint8 row vector

   127    63    31    15     7     3     1     0
```

Set Multiple Bits

Set multiple bits to different values

```
bits = 2:6;
val = [1 0 0 1 1];
intout = bitset(0,bits,val,'int8')
```

```
intout =

     2     0     0    16    32
```

Input Arguments

A — Input values

array

Input values, specified as an array. A, `bit`, and V can each be scalars or arrays of the same size.

- If A is a double array, and `assumedtype` is not specified, then MATLAB treats A as an unsigned 64-bit integer.
- If `assumedtype` is specified, then all elements in A must have integer values within the range of `assumedtype`.

Data Types: `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`bit` — Bit position

integer | integer array

Bit position, specified as an integer or integer array. A, `bit`, and V can each be scalars or arrays of the same size. The values of `bit` must be between 1 (the least significant bit) and the number of bits in the integer class of A.

Data Types: `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`assumedtype` — Assumed data type of A

`'uint64'` | `'uint32'` | `'uint16'` | `'uint8'` | `'int64'` | `'int32'` | `'int16'` | `'int8'`

Assumed data type of A, specified as `'uint64'`, `'uint32'`, `'uint16'`, `'uint8'`, `'int64'`, `'int32'`, `'int16'`, or `'int8'`.

- If A is a double array, then assumedtype can specify any valid integer type, but defaults to 'uint64'.
- If A is an integer type array, then assumedtype must specify that same integer type.

Data Types: char

V — bit value
scalar | numeric array

Bit value, specified as a scalar or a numeric array. A, bit, and V can each be scalars or arrays of the same size.

Data Types: double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical

Output Arguments

intout — Adjusted integers
array

Adjusted integers, returned as an array. intout is the same data type as A.

- If A, bit, and V are all scalars, then intout is also a scalar.
- If any of A, bit, or V is an array, then intout is the same size as that array.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

bitand | bitcmp | bitget | bitor | bitshift | bitxor | intmax

Introduced before R2006a

bitshift

Shift bits specified number of places

Syntax

```
intout = bitshift(A,k)
intout = bitshift(A,k,assumedtype)
```

Description

`intout = bitshift(A,k)` returns `A` shifted to the left by `k` bits, equivalent to multiplying by 2^k. Negative values of `k` correspond to shifting bits right or dividing by $2^{|k|}$ and rounding to the nearest integer towards negative infinity. Any overflow bits are truncated.

- If `A` is an array of signed integers, then `bitshift` returns the arithmetic shift results, preserving the signed bit when `k` is negative, and not preserving the signed bit when `k` is positive.
- If `k` is positive, MATLAB shifts the bits to the left and inserts `k` 0-bits on the right.
- If `k` is negative and `A` is nonnegative, then MATLAB shifts the bits to the right and inserts `|k|` 0-bits on the left.
- If `k` is negative and `A` is negative, then MATLAB shifts the bits to the right and inserts `|k|` 1-bits on the left.

`intout = bitshift(A,k,assumedtype)` assumes `A` is of type `assumedtype`.

Examples

Shifted 8-bit Integer

Repeatedly shift the bits of an unsigned 8-bit value to the left until all the nonzero bits overflow.

```
a = intmax('uint8');
```

```
s1 = 'Initial uint8 value %5d is %08s in binary\n';
s2 = 'Shifted uint8 value %5d is %08s in binary\n';
fprintf(s1,a,dec2bin(a))
```

```
Initial uint8 value   255 is 11111111 in binary
```

```
 for i = 1:8
    a = bitshift(a,1);
    fprintf(s2,a,dec2bin(a))
 end
```

```
Shifted uint8 value   254 is 11111110 in binary

Shifted uint8 value   252 is 11111100 in binary

Shifted uint8 value   248 is 11111000 in binary

Shifted uint8 value   240 is 11110000 in binary

Shifted uint8 value   224 is 11100000 in binary

Shifted uint8 value   192 is 11000000 in binary

Shifted uint8 value   128 is 10000000 in binary

Shifted uint8 value     0 is 00000000 in binary
```

Different Results for Different Integer Types

Find the shift for a number using different assumed integer types.

```
uintout = bitshift(6,5:7,'uint8')
```

```
uintout =

   192   128     0
```

```
intout = bitshift(6,5:7,'int8')
```

```
intout =

   -64  -128     0
```

Input Arguments

A — Input values

array

Input values, specified as an array. A can be a scalar or an array of the same size as k.

- If A is a double array, and assumedtype is not specified, then MATLAB treats A as an unsigned 64-bit integer.
- If assumedtype is specified, then all elements in A must have integer values within the range of assumedtype.

Data Types: double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

k — Number of switched bits

integer | integer array

Number of switched bits, specified as an integer or integer array. k can be a scalar or an array of the same size as A.

Data Types: double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

assumedtype — Assumed data type of A

'uint64' | 'uint32' | 'uint16' | 'uint8' | 'int64' | 'int32' | 'int16' | 'int8'

Assumed data type of A, specified as 'uint64', 'uint32', 'uint16', 'uint8', 'int64', 'int32', 'int16', or 'int8'.

- If A is an integer type array, then assumedtype must specify that same integer type.
- If A is a double array, then assumedtype can specify any valid integer type.

Data Types: char

Output Arguments

intout — Shifted values

array

Shifted values, returned as an array. `intout` is the same data type as `A`.

- If `A` and `k` are scalars, then `intout` is also a scalar.
- If either `A` or `k` is an array, then `intout` is the same size as that array.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`bitand` | `bitcmp` | `bitget` | `bitor` | `bitset` | `bitxor` | `intmax`

Introduced before R2006a

bitxor

Bit-wise XOR

Syntax

```
C = bitxor(A,B)
C = bitxor(A,B,assumedtype)

objout = bitxor(netobj1,netobj2)
```

Description

`C = bitxor(A,B)` returns the bit-wise XOR of `A` and `B`.

`C = bitxor(A,B,assumedtype)` assumes that `A` and `B` are of `assumedtype`.

`objout = bitxor(netobj1,netobj2)` returns the bit-wise XOR of the .NET enumeration objects `netobj1` and `netobj2`.

Examples

Truth Table

Create a truth table for the logical XOR operation.

```
A = uint8([0 1; 0 1]);
B = uint8([0 0; 1 1]);
TTable = bitxor(A, B)
```

```
TTable = 2×2 uint8 matrix

   0   1
   1   0
```

`bitxor` returns 0 if both bit-wise inputs are equal.

Negative Values

Explore how `bitxor` handles negative values.

MATLAB® encodes negative integers using two's complement. Thus, the bit-wise XOR of -5 (11111010) and 6 (00000110) is -3 (11111100).

```
C = -5;
D = 6;
bitxor(C,D,'int8')
```

```
ans = -3
```

- "Creating .NET Enumeration Bit Flags"

Input Arguments

A, B — Input values

scalars | vectors | matrices | multidimensional arrays

Input values, specified as scalars, vectors, matrices, or multidimensional arrays. Inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations". A and B also must be the same data type unless one is a scalar double.

- If A and B are double arrays, and `assumedtype` is not specified, then MATLAB treats A and B as unsigned 64-bit integers.
- If `assumedtype` is specified, then all elements in A and B must have integer values within the range of `assumedtype`.

Data Types: `double` | `logical` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

assumedtype — Assumed data type of A and B

`'uint64'` | `'uint32'` | `'uint16'` | `'uint8'` | `'int64'` | `'int32'` | `'int16'` | `'int8'`

Assumed data type of A and B, specified as `'uint64'`, `'uint32'`, `'uint16'`, `'uint8'`, `'int64'`, `'int32'`, `'int16'`, or `'int8'`.

- If A and B are double arrays, then `assumedtype` can specify any valid integer type, but defaults to `'uint64'`.
- If A and B are integer type arrays, then `assumedtype` must specify that same integer type.

`netobj1`, `netobj2` — Input values
.NET enumeration objects

Input values, specified as .NET enumeration objects. You must be running a version of Windows to use .NET enumeration objects as input arguments.

`bitxor` is an instance method for MATLAB enumeration objects created from a .NET enumeration.

Output Arguments

`C` — Bit-wise XOR result
array

Bit-wise XOR result, returned as an array. `C` is the same data type as `A` and `B`.

- If either `A` or `B` is a scalar double, and the other is an integer type, then `C` is the integer type.

`objout` — Bit-wise XOR result
.NET enumeration object

Bit-wise XOR result, returned as a .NET enumeration objects.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`bitand` | `bitcmp` | `bitget` | `bitnot` | `bitor` | `bitset` | `bitshift` | `intmax`

Topics

"Creating .NET Enumeration Bit Flags"

Introduced before R2006a

blanks

Create character array of blanks

Syntax

```
chr = blanks(n)
```

Description

`chr = blanks(n)` returns a `1`-by-`n` array of space characters.

Examples

Create Array of Blanks

Create an array of five blanks. To display it, embed it in a character array that starts and ends with a visible character.

```
b = blanks(5);
chr = ['|' b '|']
```

```
chr =
'|     |'
```

Embed the blanks in a string and display the string. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "Due Date:" + b + "2017-01-13"
```

```
str =
"Due Date:     2017-01-13"
```

- “Create Character Arrays”
- “Formatting Text”

Input Arguments

n — Number of space characters

integer

Number of space characters, specified as an integer.

- If `n` is `0`, then `blanks` returns a `1`-by-`0` character array.
- If `n` is less than `0`, then `blanks` treats it as `0`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`char` | `deblank` | `string`

Topics

"Create Character Arrays"
"Formatting Text"

Introduced before R2006a

blkdiag

Construct block diagonal matrix from input arguments

Syntax

```
out = blkdiag(a,b,c,d,...)
```

Description

`out = blkdiag(a,b,c,d,...)`, where `a`, `b`, `c`, `d`, `...` are matrices, outputs a block diagonal matrix of the form

$$\begin{bmatrix} a & 0 & 0 & 0 & 0 \\ 0 & b & 0 & 0 & 0 \\ 0 & 0 & c & 0 & 0 \\ 0 & 0 & 0 & d & 0 \\ 0 & 0 & 0 & 0 & \ldots \end{bmatrix}$$

The input matrices do not have to be square, nor do they have to be of equal size.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`diag` | `horzcat` | `vertcat`

Introduced before R2006a

bone

Bone colormap array

Syntax

```
c = bone
c = bone(m)
```

Description

`c = bone` returns the bone colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = bone(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the bone colormap.

```
surf(peaks);
colormap('bone');
```

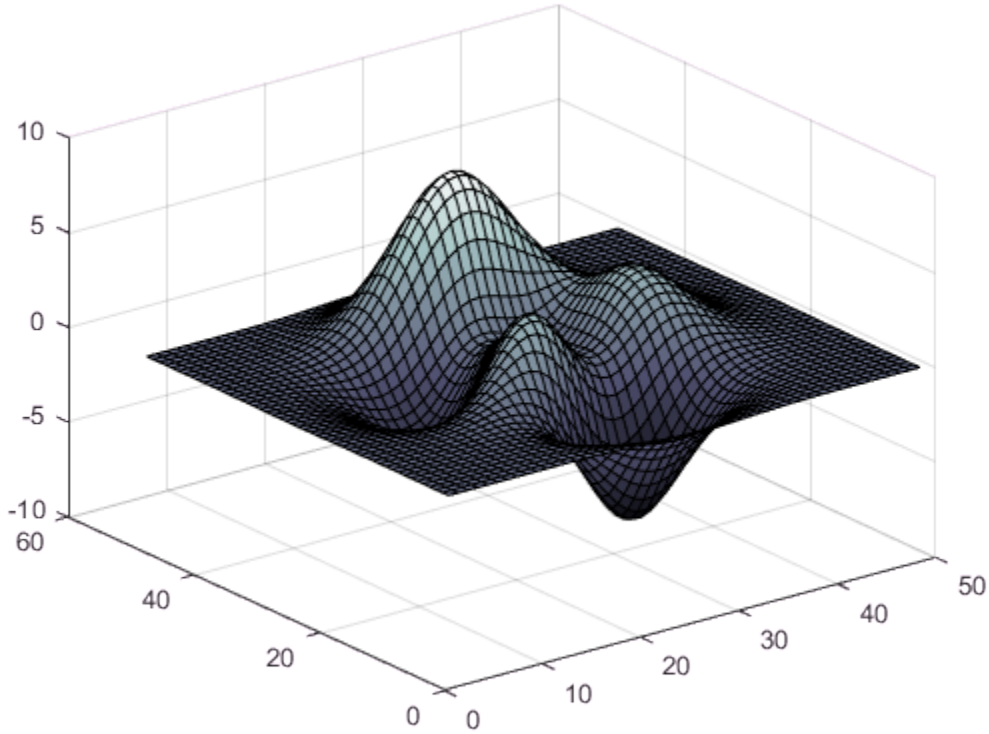

Get the bone colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = bone;
c = flipud(c);
colormap(c);
```

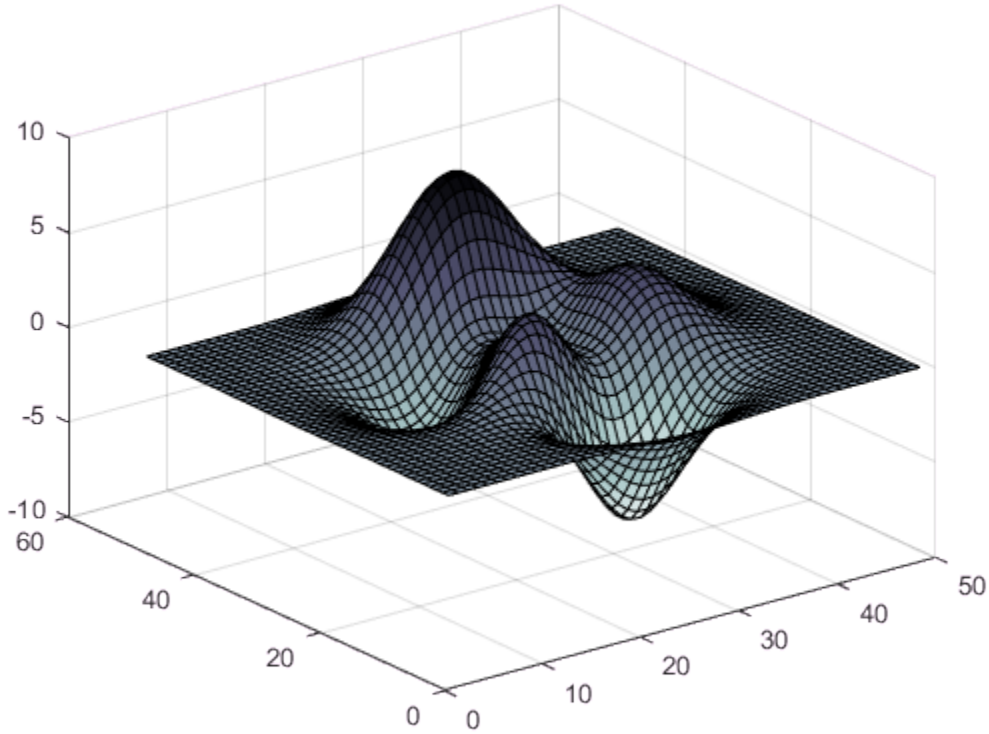

Downsample the Bone Colormap

Get a downsampled version of the bone colormap containing only twenty colors. Then display the contours of a paraboloid by applying the colormap and interpolated shading.

```
c = bone(20);
[X,Y] = meshgrid(-10:1:10);
Z = X.^2 + Y.^2;
surf(X,Y,Z);
colormap(c);
shading interp;
```

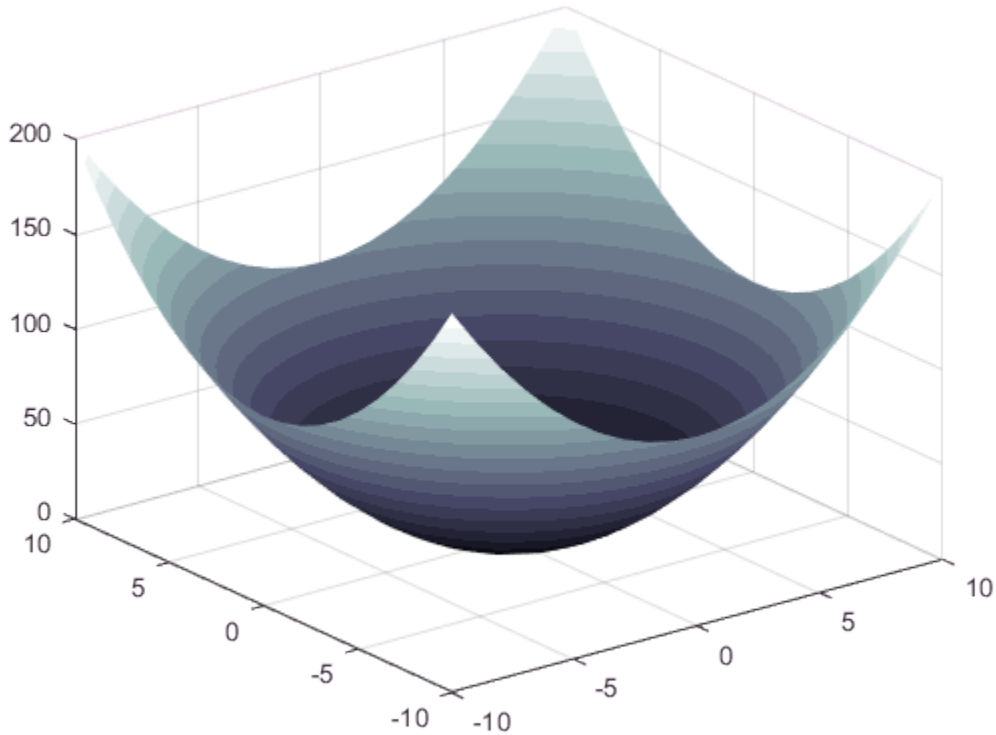

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

boundary

Boundary of a set of points in 2-D or 3-D

Syntax

```
k = boundary(x,y)
k = boundary(x,y,z)
k = boundary(P)
k = boundary( ___ ,s)
[k,v] = boundary( ___ )
```

Description

`k = boundary(x,y)` returns a vector of point indices representing a single conforming 2-D boundary around the points `(x,y)`. The points `(x(k),y(k))` form the boundary. Unlike the convex hull, the boundary can shrink towards the interior of the hull to envelop the points.

`k = boundary(x,y,z)` returns a triangulation representing a single conforming 3-D boundary around the points `(x,y,z)`. Each row of `k` is a triangle defined in terms of the point indices.

`k = boundary(P)` specifies points `(x,y)` or `(x,y,z)` in the columns of matrix `P`.

`k = boundary( ___ ,s)` specifies shrink factor `s` using any of the previous syntaxes. `s` is a scalar between `0` and `1`. Setting `s` to `0` gives the convex hull, and setting `s` to `1` gives a compact boundary that envelops the points. The default shrink factor is `0.5`.

`[k,v] = boundary( ___ )` also returns a scalar `v`, which is the area (2-D) or volume (3-D) which boundary `k` encloses.

Examples

Boundary of 2-D Point Cloud

Create and plot a set of random 2-D points.

```
x = gallery('uniformdata',30,1,1);
y = gallery('uniformdata',30,1,10);
plot(x,y,'.')
xlim([-0.2 1.2])
ylim([-0.2 1.2])
```

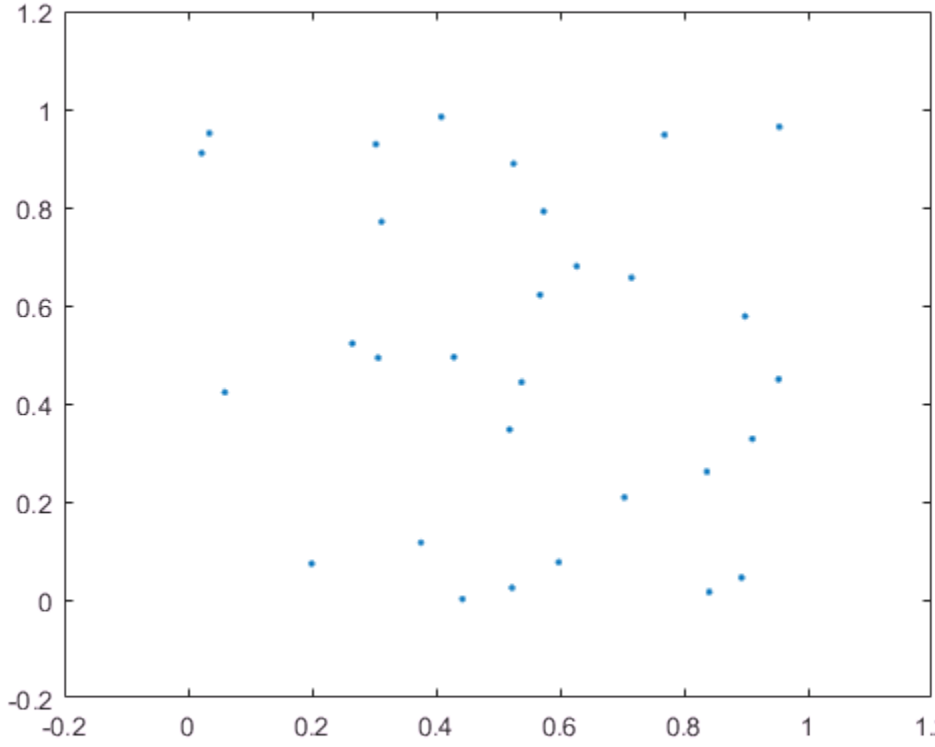

Compute a boundary around the points using the default shrink factor.

```
k = boundary(x,y);
hold on;
plot(x(k),y(k));
```

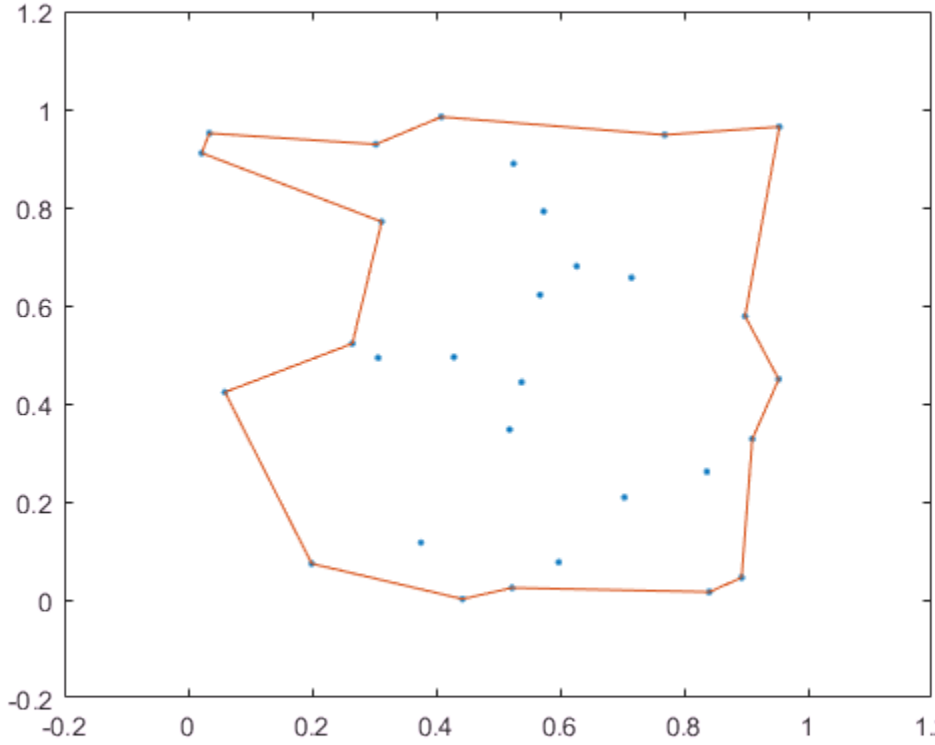

Create a new boundary around the points using a shrink factor of 0.1. The result is a less compact boundary enveloping the points.

```
j = boundary(x,y,0.1);
hold on;
plot(x(j),y(j));
```

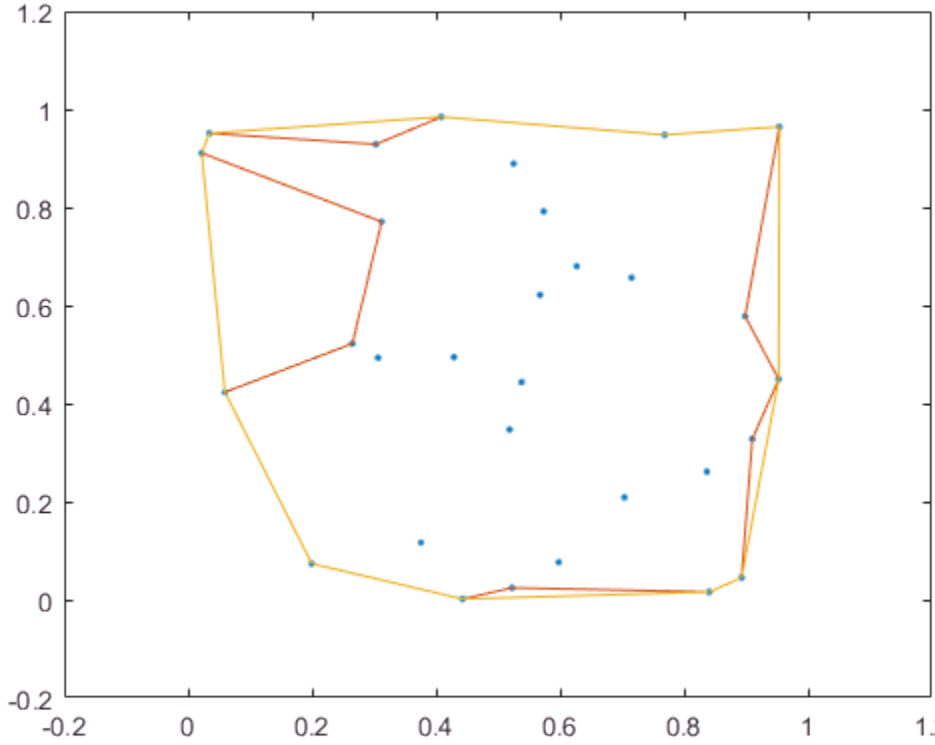

Boundary of 3-D Point Cloud

Create and plot a set of random 3-D points.

```
P = gallery('uniformdata',30,3,5);
plot3(P(:,1),P(:,2),P(:,3),'.','MarkerSize',10)
grid on
```

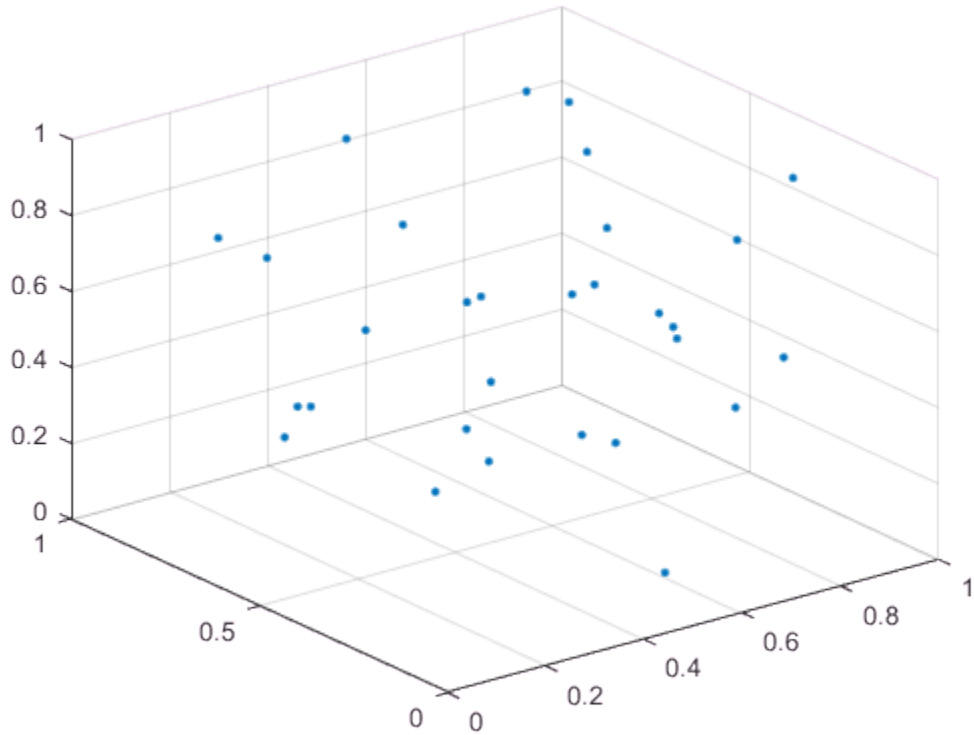

Plot the boundary using the default shrink factor.

```
k = boundary(P);
hold on
trisurf(k,P(:,1),P(:,2),P(:,3),'Facecolor','red','FaceAlpha',0.1)
```

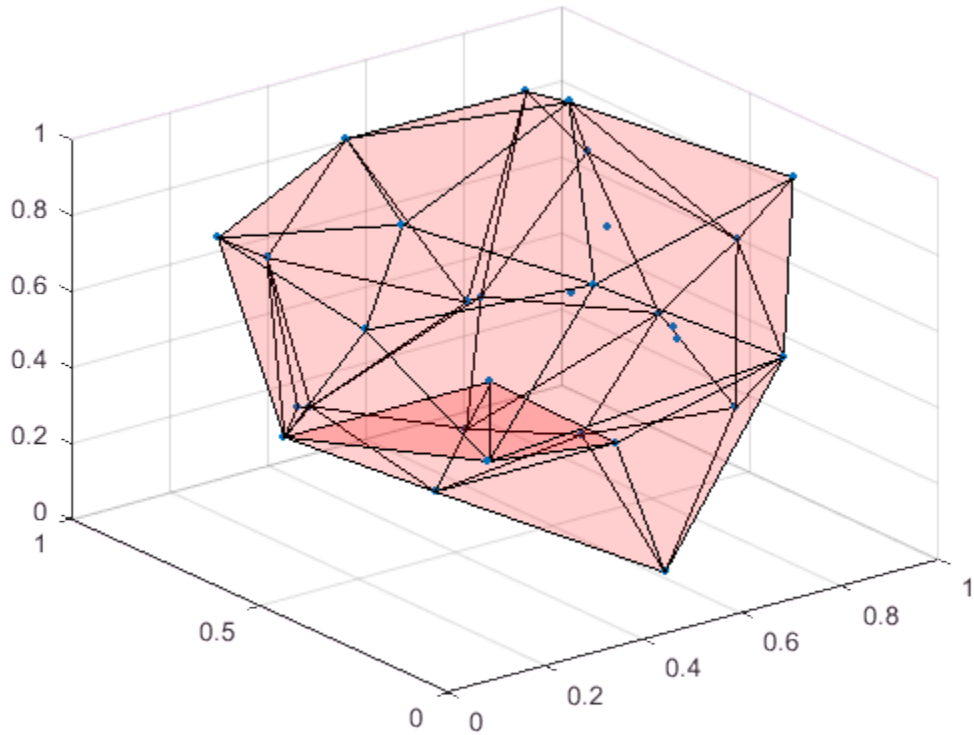

Shrink Factor Effect on 3-D Boundary

Create and plot a set of random 3-D points.

```
P = gallery('uniformdata',30,3,8);
plot3(P(:,1),P(:,2),P(:,3),'.')
grid on
```

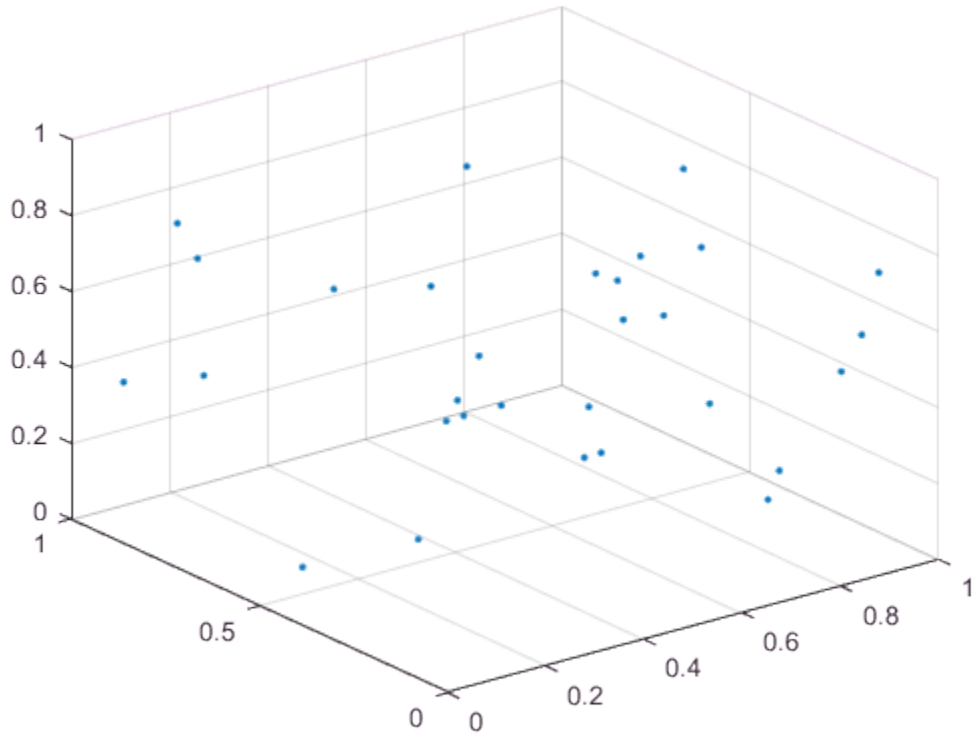

Compute two boundaries: one with a shrink factor of 0 and the other with a shrink factor of 1.

```
k = boundary(P,0);
j = boundary(P,1);
```

Compare the shrink factors by plotting the original points and the two boundaries side-by-side.

```
subplot(1,2,1);
plot3(P(:,1),P(:,2),P(:,3),'.','MarkerSize',10)
hold on
trisurf(k,P(:,1),P(:,2),P(:,3),'Facecolor','red','FaceAlpha',0.1)
axis equal
```

```
title('Shrink Factor = 0')

subplot(1,2,2);
plot3(P(:,1),P(:,2),P(:,3),'.','MarkerSize',10)
hold on
trisurf(j,P(:,1),P(:,2),P(:,3),'Facecolor','red','FaceAlpha',0.1)
axis equal
title('Shrink Factor = 1')
```

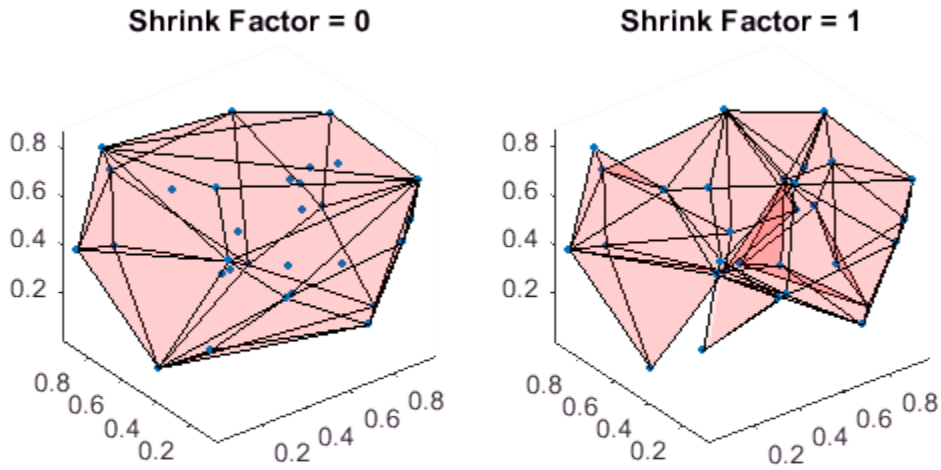

Volume of 3-D Boundary

Create and plot a set of random 3-D points.

```
P = gallery('uniformdata',30,3,1);
plot3(P(:,1),P(:,2),P(:,3),'.')
grid on
```

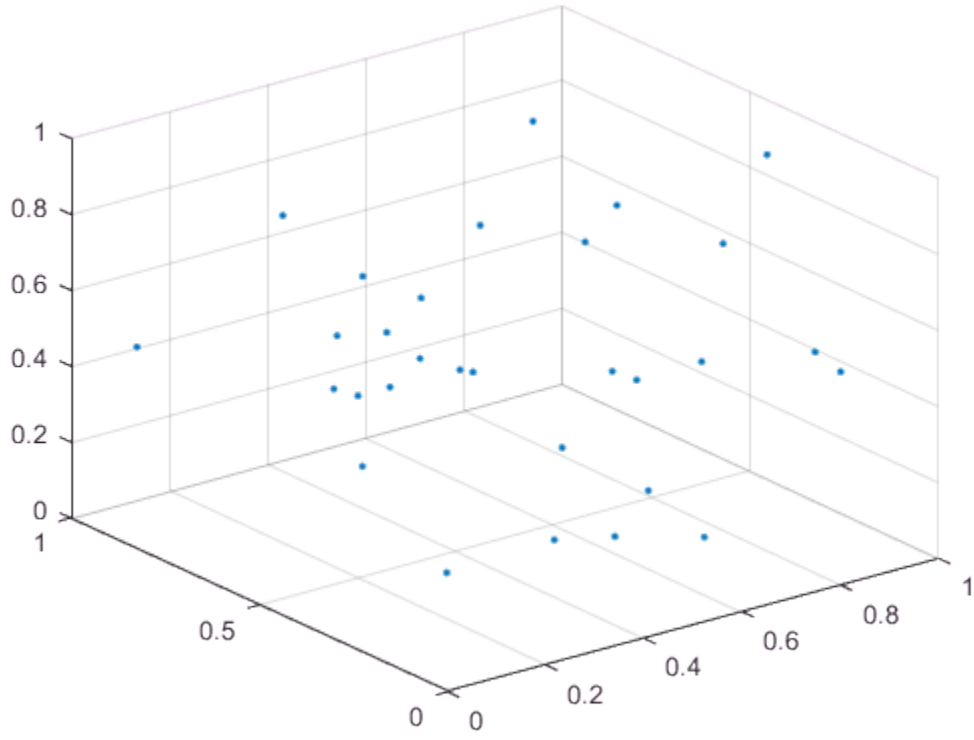

Use the `boundary` function to compute a boundary around the points, and find the volume of the resulting shape.

```
[~, vol] = boundary(P);
vol
```

```
vol = 0.3012
```

Input Arguments

x — x-coordinates of points
column vector

x-coordinates of points, specified as a column vector.

Data Types: `double`

y — y-coordinates of points
column vector

y-coordinates of points, specified as a column vector.

Data Types: `double`

z — z-coordinates of points
column vector

z-coordinates of points, specified as a column vector.

Data Types: `double`

P — Point coordinates
matrix with two columns | matrix with three columns

Point coordinates, specified as a matrix with two columns (for a 2-D alpha shape) or a matrix with three columns (for a 3-D alpha shape).

- For 2-D, the columns of `P` represent `x` and `y` coordinates, respectively.
- For 3-D, the columns of `P` represent `x`, `y`, and `z` coordinates, respectively.

Data Types: `double`

s — Shrink factor
`0.5` (default) | scalar in range `[0,1]`

Shrink factor, specified as a scalar in the range of `[0,1]`.

- `s = 0` corresponds to the convex hull of the points.
- `s = 1` corresponds to the tightest single-region boundary around the points.

The default shrink factor is `0.5`. Specify a larger or smaller shrink factor to tighten or loosen the boundary around the points, respectively.

Example: `k = boundary(x,y,0.76)` specifies a shrink factor of `0.76`, producing a tighter boundary than the default.

Output Arguments

k — Boundary point indices

vector | matrix

Boundary point indices, returned as a vector or matrix. `k` contains the indices of the input points that lie on the boundary.

- For 2-D problems, `k` is a column vector of point indices representing the sequence of points around the boundary, which is a polygon.
- For 3-D problems, `k` is a triangulation matrix of size `mtri`-by-`3`, where `mtri` is the number of triangular facets on the boundary. Each row of `k` defines a triangle in terms of the point indices, and the triangles collectively form a bounding polyhedron.

v — Area or volume enclosed by boundary

scalar

Area or volume enclosed by boundary, returned as a scalar.

- For 2-D problems, `v` is the area enclosed by boundary `k`.
- For 3-D problems, `v` is the volume enclosed by boundary `k`.

See Also

See Also

`alphaShape` | `convhull` | delaunayTriangulation | triangulation | `trisurf`

Introduced in R2014b

bounds

Smallest and largest elements

Syntax

```
[S,L] = bounds(A)
[S,L] = bounds(A,dim)
[S,L] = bounds( ___ ,nanflag)
```

Description

`[S,L] = bounds(A)` returns the smallest element `S` and largest element `L` of an array. `S` is equivalent to `min(A)` and `L` is equivalent to `max(A)`.

`[S,L] = bounds(A,dim)` operates along the dimension `dim` of `A`. For example, if `A` is a matrix, then `bounds(A,2)` returns column vectors `S` and `L` containing the smallest and largest elements of each row.

`[S,L] = bounds( ___ ,nanflag)` specifies whether to include or omit `NaN` values when determining the smallest and largest elements. `bounds(A,'omitnan')` ignores `NaN` values. If any element of `A` is `NaN`, then `bounds(A,'includenan')` returns `NaN` for both `S` and `L`. The default behavior is `'omitnan'`.

Examples

Smallest and Largest Elements of Vector

Simultaneously compute the smallest and largest values of a vector.

```
A = [2 4 -1 10 6 3 0 -16];
[S,L] = bounds(A)
```

```
S = -16
```

```
L = 10
```

Smallest and Largest Elements of Matrix Rows

Compute the smallest and largest elements of each row of a matrix.

```
A = magic(4)
```

```
A =

    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1
```

```
[S,L] = bounds(A,2)
```

```
S =

     2
     5
     6
     1


L =

    16
    11
    12
    15
```

Vector with NaN Values

Include and ignore NaN elements of a vector when computing its smallest and largest values.

Ignore NaN values when computing the largest and smallest values of a vector, which is the default.

```
A = [2 NaN 6 -5 0 NaN 10];
[S,L] = bounds(A)
```

```
S = -5

L = 10
```

Use the `'omitnan'` option to include `NaN` values, which causes `bounds` to return `NaN` for both the smallest and largest values of `A`.

```
[S,L] = bounds(A,'includenan')

S = NaN

L = NaN
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Example:

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a matrix `A`.

- `bounds(A,1)` computes the smallest and largest values of each column.

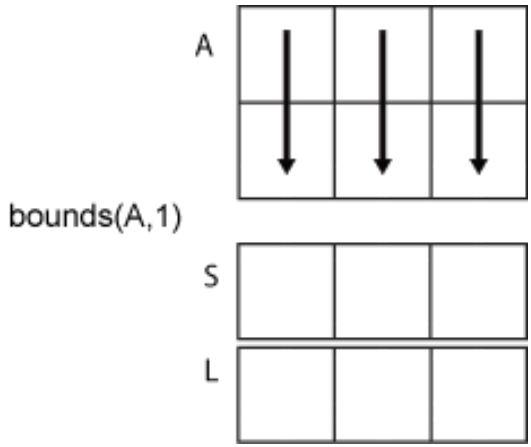

- `bounds(A,2)` computes the smallest and largest values of each row.

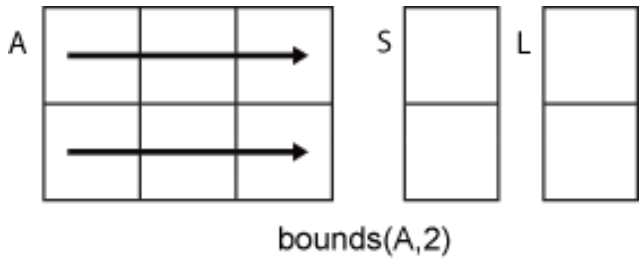

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition
`'omitnan'` (default) | `'includenan'`

`NaN` condition, specified as one of these values:

- `'omitnan'` — Ignore all `NaN` values in the input. If the input contains only `NaN` values, then `bounds` returns `NaN` for both `S` and `L`.
- `'includenan'` — Include `NaN` values. If any element of the input is `NaN`, then `bounds` returns `NaN` for both `S` and `L`.

Output Arguments

S — Smallest element

vector | matrix | multidimensional array

Smallest element, specified as a vector, matrix, or multidimensional array.

L — Largest element

vector | matrix | multidimensional array

Largest element, specified as a vector, matrix, or multidimensional array.

See Also

See Also

`max` | `min`

Introduced in R2017a

box

Display axes outline

Syntax

```
box on
box off
box

box(ax, ___ )
```

Description

`box on` displays the box outline around the current axes. This option sets the `Box` property of the current axes to `'on'`.

`box off` does not the display the box outline around the current axes. This option sets the `Box` property of the current axes to `'off'`. This option is the default behavior.

`box` toggles the display of the box outline.

`box(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify the axes as the first input argument for any of the previous syntaxes. Use single quotes around the `'on'` and `'off'` inputs, such as `box(ax,'on')`.

Examples

Display Box Outline Around Axes

Plot a surface and display the box outline around the axes.

```
[X,Y,Z] = peaks;
surf(X,Y,Z)
box on
```

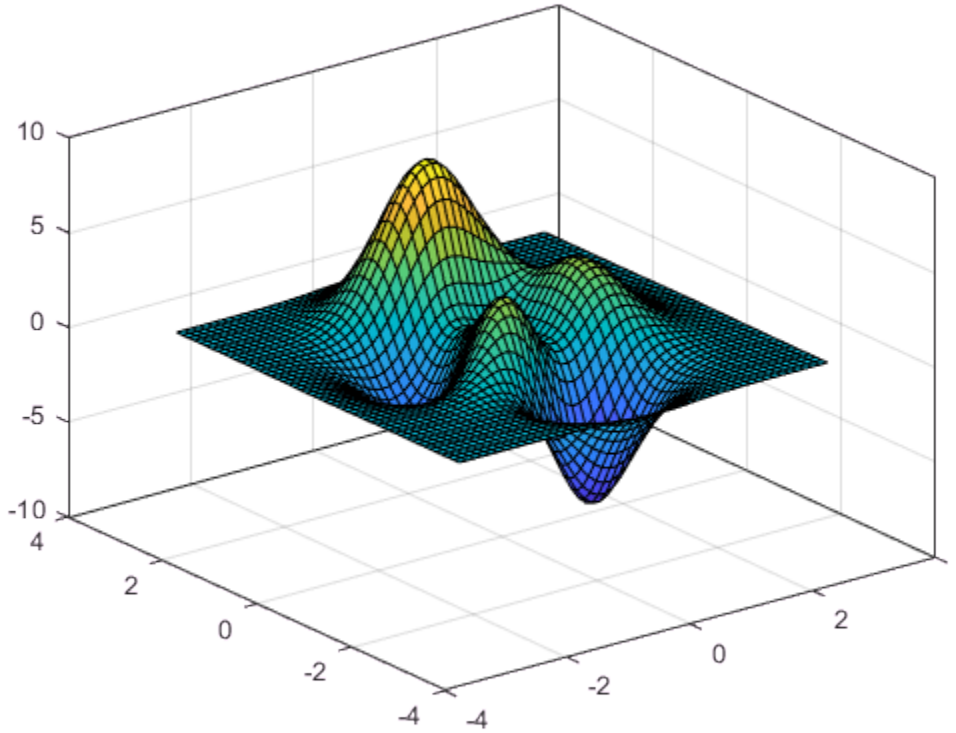

Turn off the display of the box outline.

```
box off
```

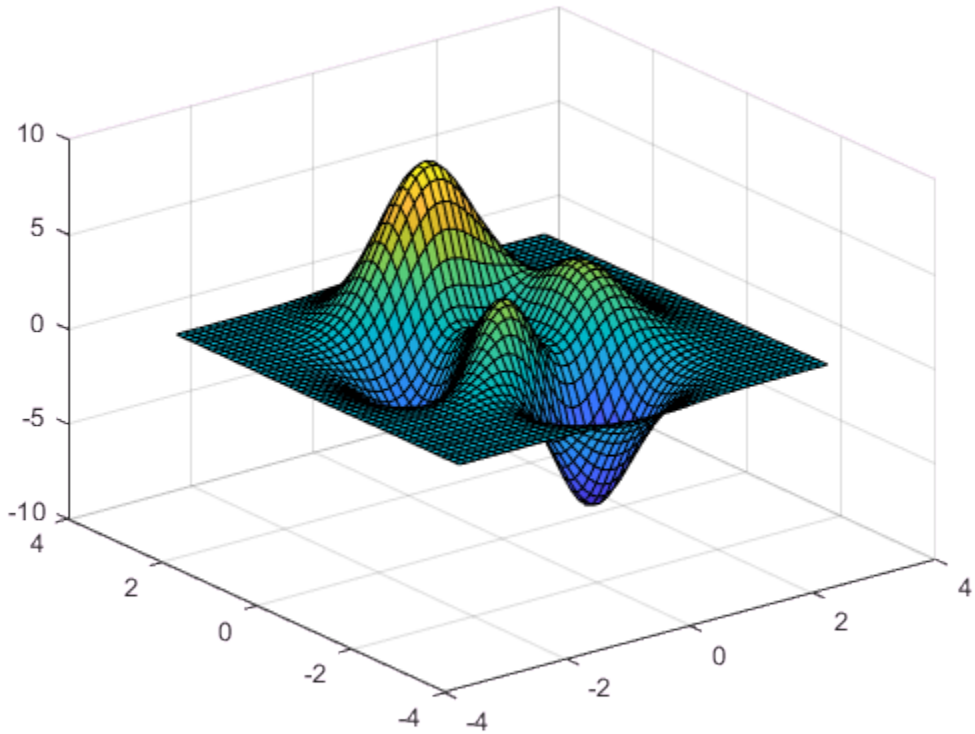

Change Style of Box Outline

First, plot a surface and display the box outline around the axes. By default, the outline appears around the back planes of the axes because the `BoxStyle` property of the axes is set to `'back'`.

```
[X,Y,Z] = peaks;
surf(X,Y,Z)
box on
```

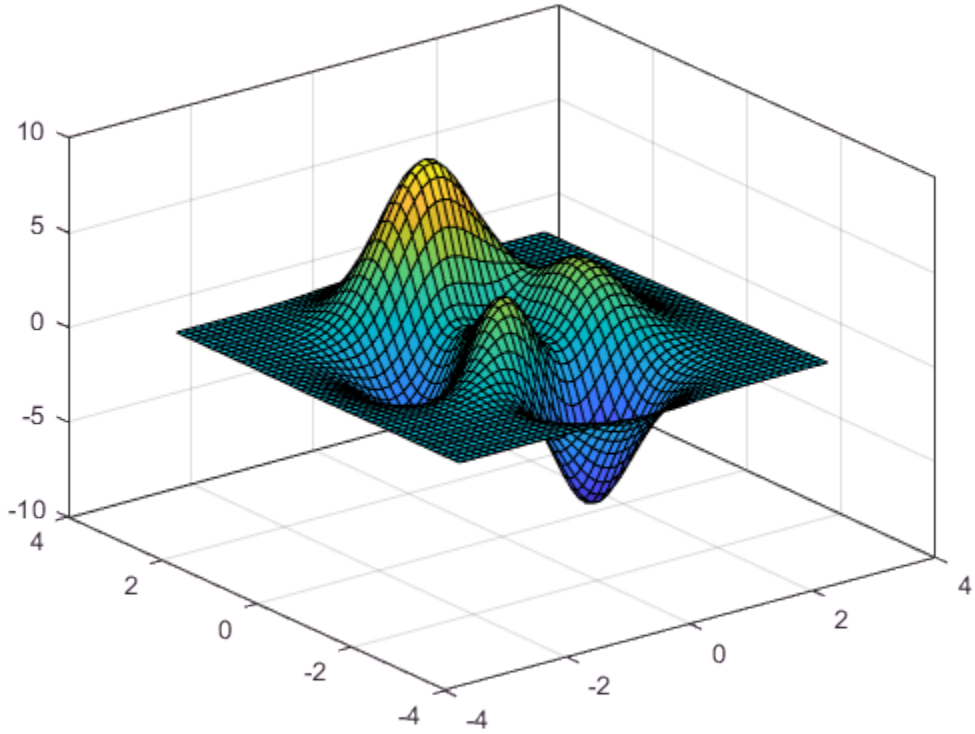

Next, display the outline around the entire axes by setting the `BoxStyle` property to `'full'`. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
ax = gca;
ax.BoxStyle = 'full';
```

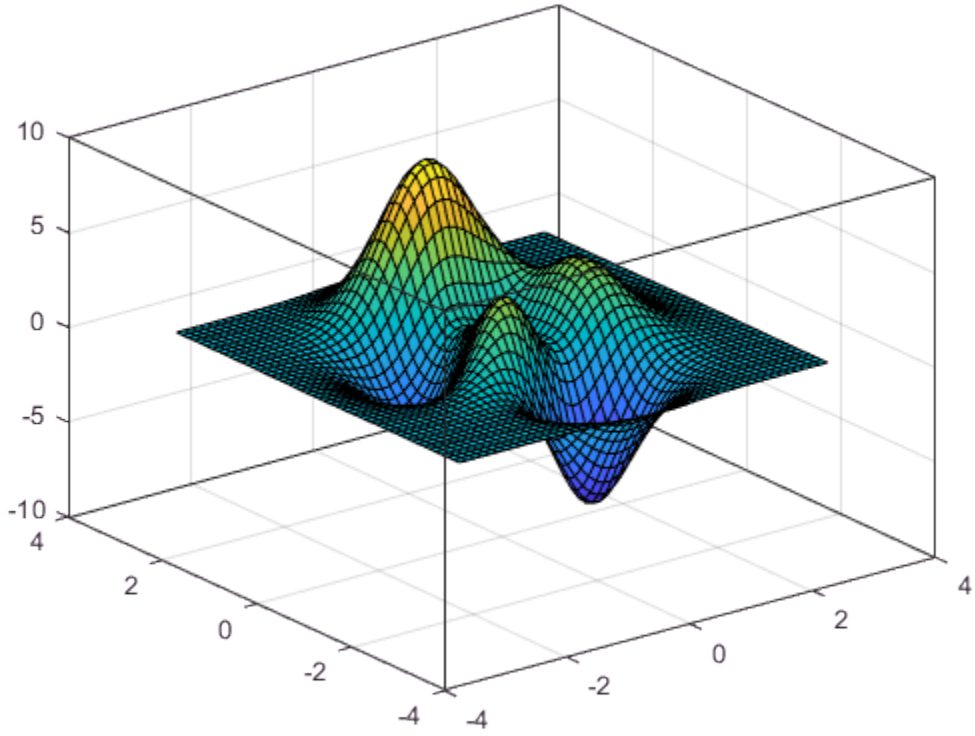

Change Color of Box Outline

Create a scatter plot and display the box outline around the axes.

```
x = rand(10,1);
y = rand(10,1);
scatter(x,y)
box on
```

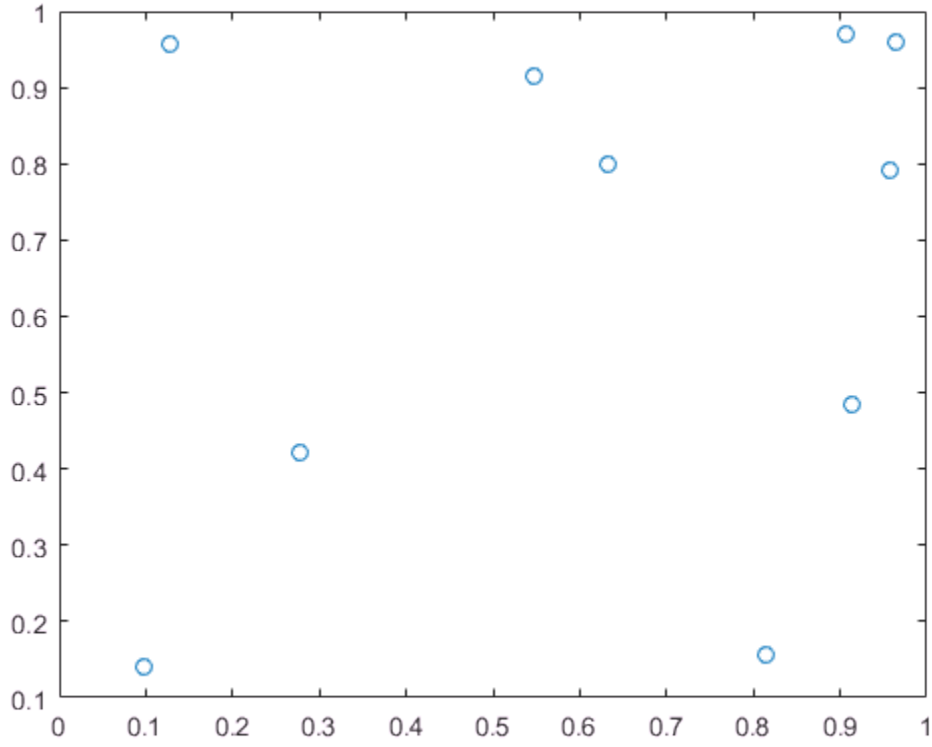

Change the color of the box outline in the *x*-axis direction by setting the `XColor` property of the axes. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
ax = gca;
ax.XColor = 'red';
```

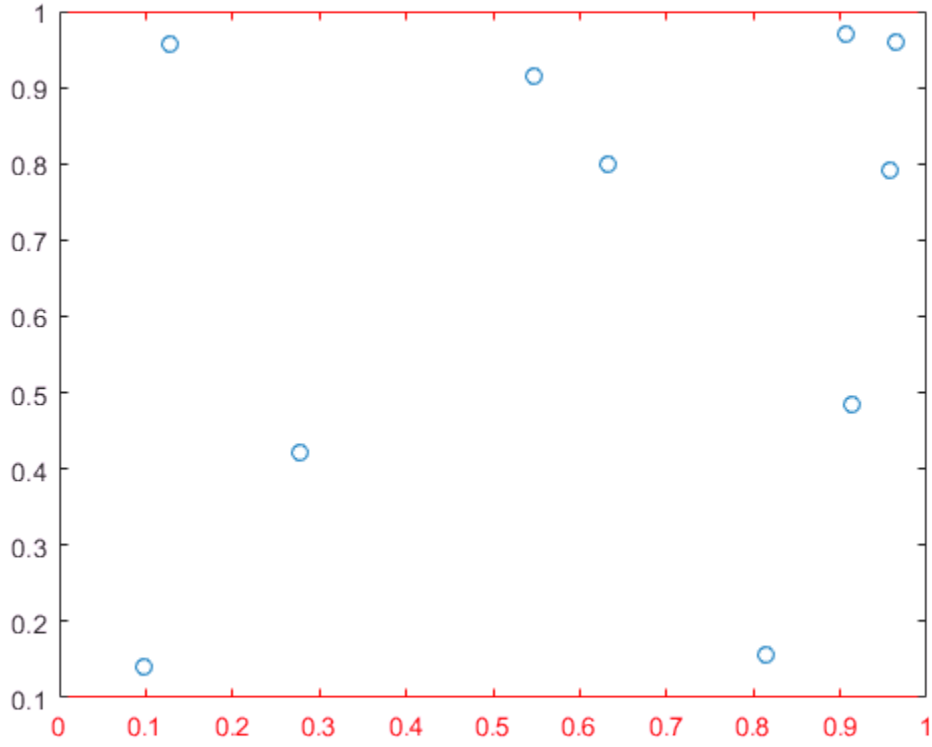

Turn Off Box Outline for Specific Axes

Create a figure with two subplots and assign the `Axes` objects to the variables `ax1` and `ax2`. Plot a line in each subplot. Remove the box outline around the lower subplot by specifying `ax2` as the first input argument to `box`.

```
ax1 = subplot(2,1,1);
plot(ax1,1:10)

ax2 = subplot(2,1,2);
plot(ax2,1:10)
box(ax2,'off')
```

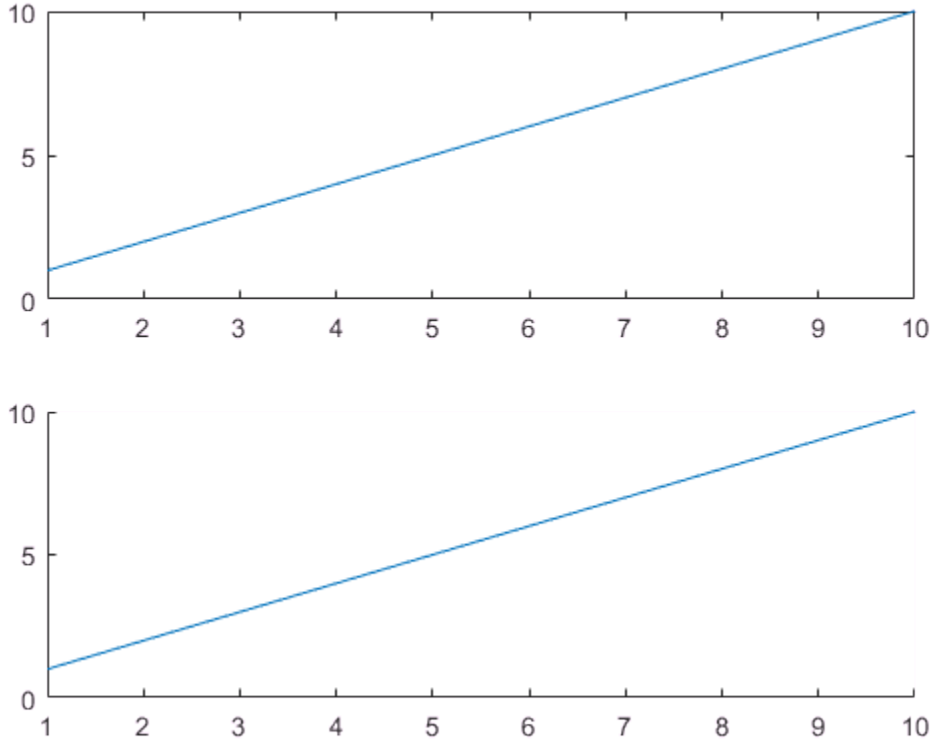

Input Arguments

ax — Target axes

`Axes` object | `PolarAxes` object

Target axes, specified as an `Axes` object or a `PolarAxes` object. If you do not specify the axes, then `box` affects the current axes.

Tips

- Some Cartesian axes properties affect the appearance of the box outline. This table lists a subset of axes properties related to the box outline.

Axes Property	Description
Box	Display of box outline
BoxStyle	Style of box outline
XColor, YColor, ZColor	Box outline color in the *x*-axis, *y*-axis, and *z*-axis directions
LineWidth	Width of box outline, tick marks, and grid lines

- Some polar axes properties affect the appearance of the outline around the polar axes. If you are working with polar axes, then the `box` command controls the outline display when the *theta*-axis limits do not span 360 degrees. This table lists a subset of polar axes properties related to the outline.

PolarAxes Property	Description
Box	Display of full outline
RColor, ThetaColor	Outline color
LineWidth	Width of outline, tick marks, and grid lines

Algorithms

The `box` function sets the `Box` property of the `Axes` or `PolarAxes` object to either `'on'` or `'off'`.

See Also

See Also

Functions

`axis` | `gca` | `grid`

Properties
Axes Properties | PolarAxes Properties

Introduced before R2006a

break

Terminate execution of for or while loop

Syntax

```
break
```

Description

`break` terminates the execution of a `for` or `while` loop. Statements in the loop after the `break` statement do not execute.

In nested loops, `break` exits only from the loop in which it occurs. Control passes to the statement that follows the `end` of that loop.

Examples

Exit Loop Before Expression Is False

Sum a sequence of random numbers until the next random number is greater than an upper limit. Then, exit the loop using a `break` statement.

```
limit = 0.8;
s = 0;

while 1
    tmp = rand;
    if tmp > limit
        break
    end
    s = s + tmp;
end
```

Tips

- The `break` statement exits a `for` or `while` loop completely. To skip the rest of the instructions in the loop and begin the next iteration, use a `continue` statement.
- `break` is not defined outside a `for` or `while` loop. To exit a function, use `return`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`continue` | `end` | `for` | `return` | `while`

Introduced before R2006a

brighten

Brighten or darken colormap

Syntax

```
brighten(beta)
brighten(h,beta)
newmap = brighten(beta)
newmap = brighten(cmap,beta)
```

Description

`brighten(beta)` increases or decreases the color intensities in a colormap by replacing the current colormap with a brighter or darker colormap of essentially the same colors. The modified colormap is brighter if `0 < beta < 1` and darker if `-1 < beta < 0`. `brighten(beta)`, followed by `brighten(-beta)`, where `beta < 1`, restores the original map.

`brighten(h,beta)` brightens all objects that are children of the figure having the handle `h`.

`newmap = brighten(beta)` returns a brighter or darker version of the current colormap without changing the display.

`newmap = brighten(cmap,beta)` returns a brighter or darker version of the colormap `cmap` without changing the display.

Examples

Brighten Colormap

Display a surface plot of `membrane`.

```
surf(membrane)
```

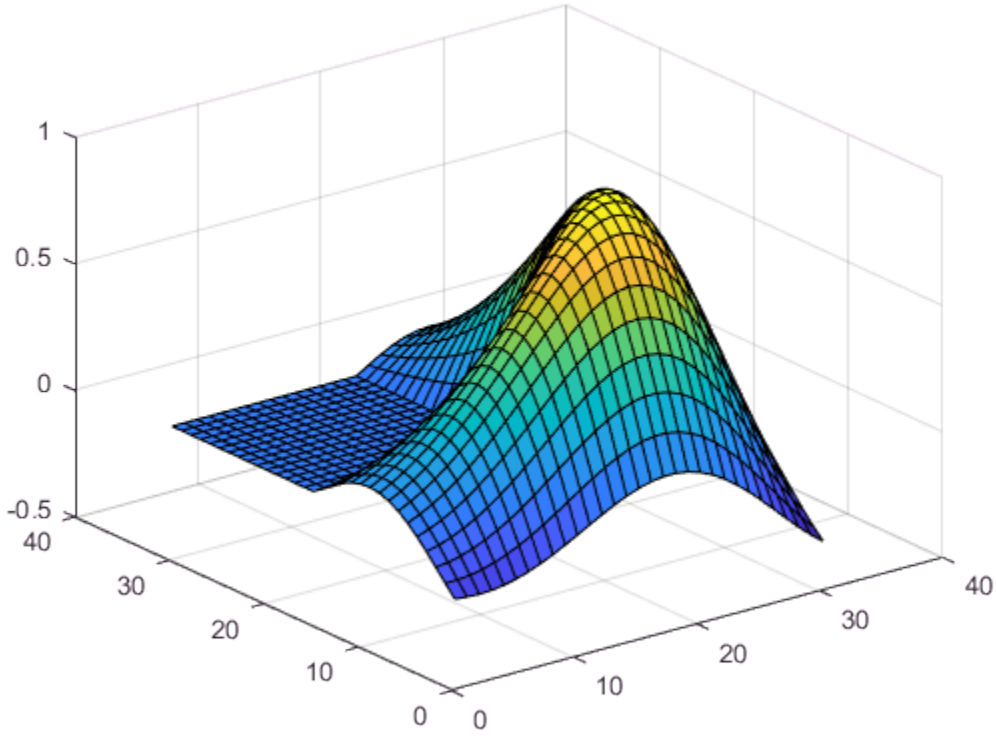

Brighten the colormap.

```
beta = .7;
brighten(beta)
```

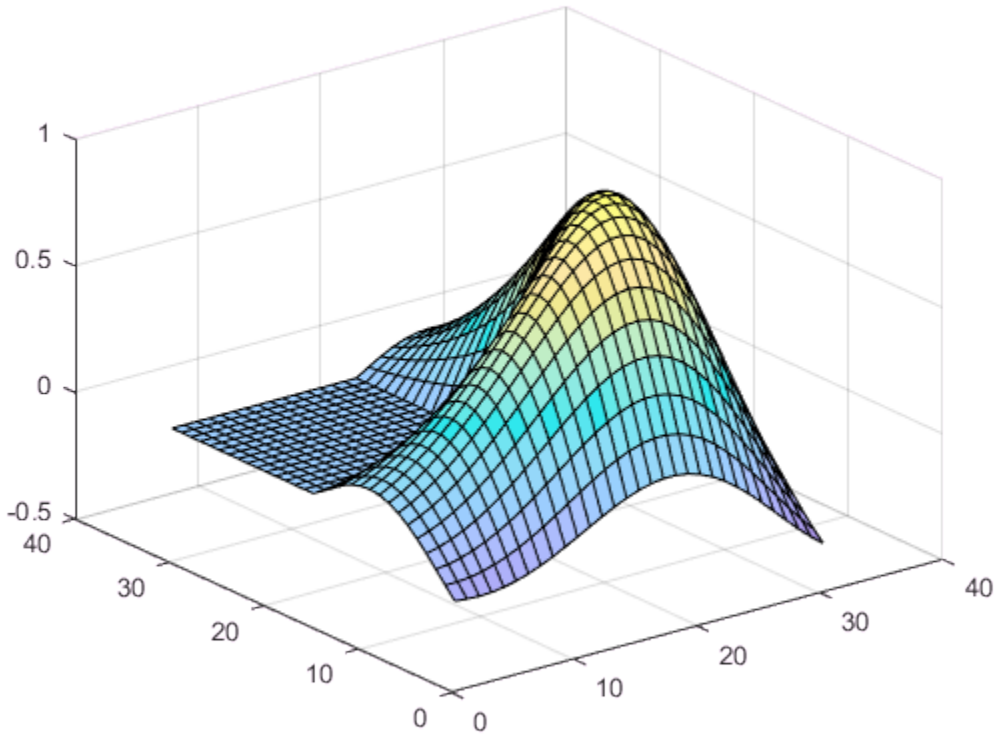

Algorithms

`brighten` raises values in the colormap to the power of gamma, where gamma is

$$\gamma = \begin{cases} 1-\beta, & \beta > 0 \\ \dfrac{1}{1+\beta}, & \beta \le 0 \end{cases}$$

`brighten` has no effect on graphics objects defined with true color.

See Also

`colormap` | `rgbplot`

Introduced before R2006a

brush

Interactively mark, delete, modify, and save observations in graphs

Syntax

```
brush on
brush off
brush
brush color
brush(figure_handle,...)
brushobj = brush(figure_handle)
```

Description

Data brushing is a mode for interacting with graphs in figure windows in which you can click data points or drag a selection rectangle around data points to highlight observations in a color of your choice. Highlighting takes different forms for different types of graphs, and brushing marks persist—even in other interactive modes—until removed by deselecting them.

`brush on` turns on interactive data brushing mode.

`brush off` turns brushing mode off, leaving any brushed observations still highlighted.

`brush` by itself toggles the state of the data brushing tool.

`brush color` sets the current color used for brushing graphics to the specified `ColorSpec`. Changing brush color affects subsequent brushing, but does not change the color of observations already brushed or the brush tool's state.

`brush(figure_handle,...)` applies the function to the specified figure handle.

`brushobj = brush(figure_handle)` returns a *brush mode object* for that figure, useful for controlling and customizing the figure's brushing state. The following properties of such objects can be modified using `get` and `set`:

`Enable 'on' | {'off'}`	Specifies whether this figure mode is currently enabled on the figure.
`FigureHandle`	The associated figure handle. This property supports `get` only.
`Color`	Specifies the color to be used for brushing.

`brush` cannot return a brush mode object at the same time you are calling it to set a brushing option.

Examples

Example 1

On a scatter plot, drag out a rectangle to brush the graph:

```
x = rand(20,1);
y = rand(20,1);
scatter(x,y,80,'s')
brush on
```

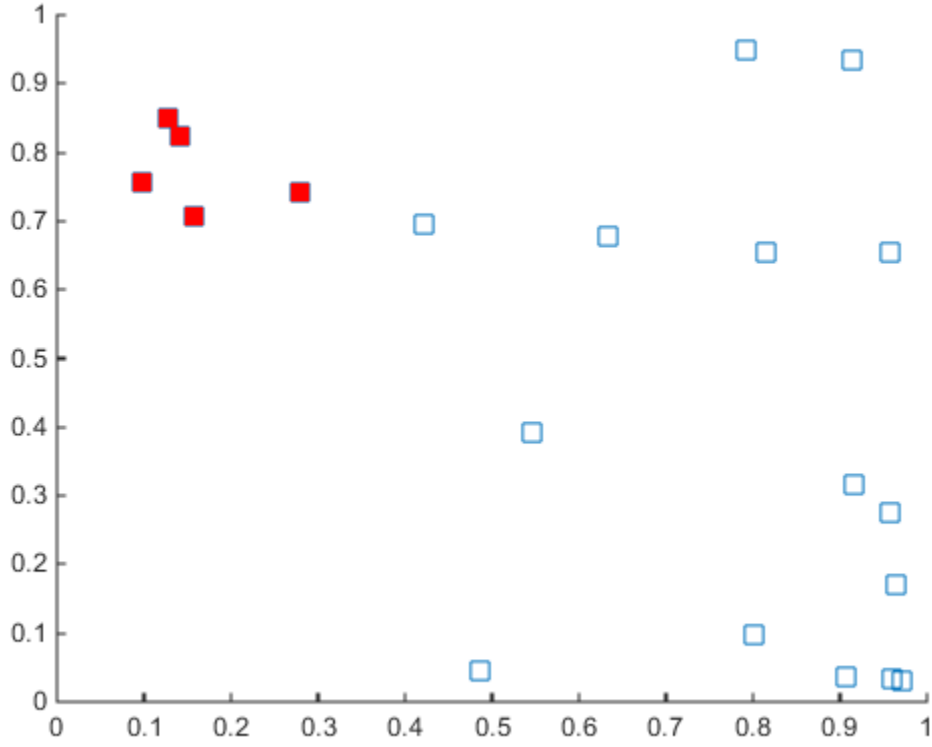

Example 2

Brush observations from -.2 to .2 on a line plot in dark red:

```
x = [-2*pi:.1:2*pi];
y = sin(x);
plot(x,y);
h = brush;
set(h,'Color',[.6 .2 .1],'Enable','on');
```

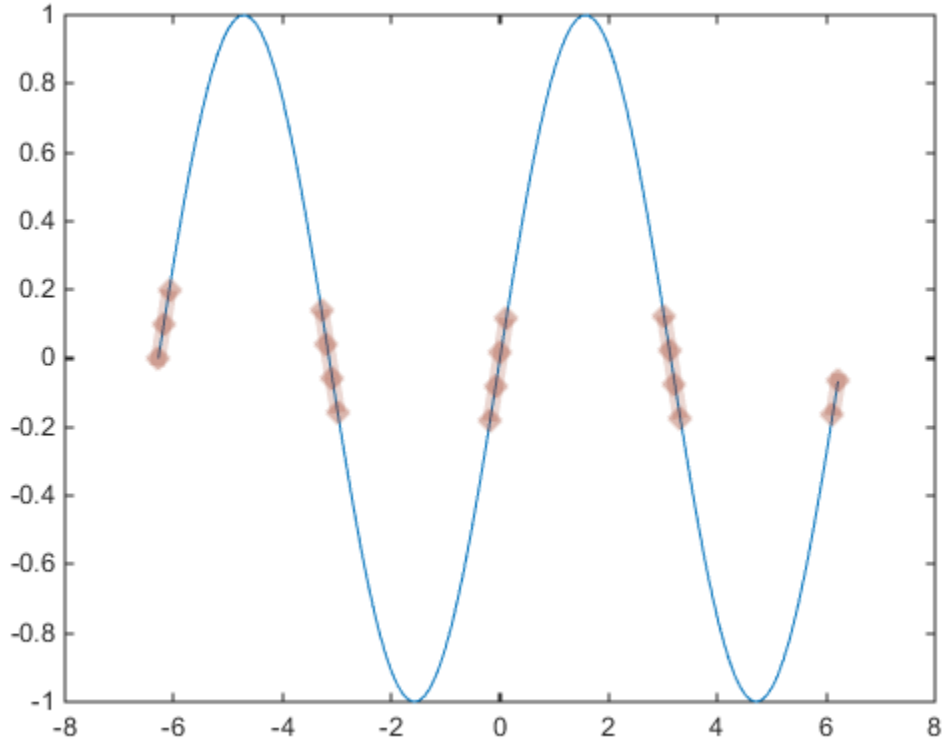

Tips

- "Types of Charts You Can Brush" on page 1-894
- "Mode Exclusivity and Persistence" on page 1-894
- "How Data Linking Affects Data Brushing" on page 1-895
- "Mouse Gestures for Data Brushing" on page 1-895
- "Brush Mode Callbacks" on page 1-896

Types of Charts You Can Brush

Not all charts support data brushing. The graphics functions listed here create charts that support data brushing.

- Line charts created with `plot`, `plot3`, `loglog`, `semilogx`, `semilogy`, or `stairs`. Brushing highlights a line segment when you brush both vertices of the line segment.
- Scatter charts created with `scatter`, `scatter3`, or `spy`.
- Stem charts created with `stem` or `stem3`.
- Area charts created with `area`
- Bar charts created with `bar` or `barh`.
- Radial charts created with `compass`, `feather`, `rose` or `ezpolar`.
- Surface charts created with `surf`, `surfc`, `surfl`, `mesh`, `meshc`, or `meshz`. Brushing highlights a surface face when you brush all four vertices of the face.
- Histogram charts created with `histogram` or `histogram2`. Before you can enable brushing, turn on data linking using the `linkdata on` command or by selecting the link plot icon in the figure toolbar.

Mode Exclusivity and Persistence

Data brushing mode is *exclusive*, like zoom, pan, data cursor, or plot edit mode. However, brush marks created in data brushing mode *persist* through all changes in mode. Brush marks that appear in other graphs while they are linked via `linkdata` also persist even when data linking is subsequently turned off. That is, severing connections to a graph's data sources does not remove brushing marks from it. The only ways to remove brushing marks are (in brushing mode):

- Brush an empty area in a brushed graph.
- Right-click and select **Clear all brushing** from the context menu.

Changing the brushing color for a figure does not recolor existing brush marks. If you change the brushing color and hold down the **Shift** key when brushing new data, all existing brush marks change to the new color. All brush marks that appear on linked plots in the same or different figure also change to the new color if the brushing action affects them. The behavior is the same whether you select a brushing color from the Brush Tool dropdown palette, set it by calling `brush(colorspec)`, or by setting the `Color` property of a brush mode object (e.g., `set(brushobj,'Color',colorspec)`).

How Data Linking Affects Data Brushing

When you use the Data Linking tool or call the `linkdata` function, brushing marks that you make on one plot appear on other plots that depict the same variable you are brushing—if those plots are also linked. This happens even if the affected plot is not in Brushing mode. That is, brushing marks appear on a linked plot *in any mode* when you brush another plot linked to it via a common variable or brush that variable in the Variables editor. Be aware that the following conditions apply, however:

- The graph type must support data brushing. For a list, see "Types of Charts You Can Brush" on page 1-894.
- The graphed variable must not be complex; if you can plot a complex variable you can brush it, but such graphs do not respond when you brush the complex variable in another linked plot. For more information about linking complex variables, see Example 3 in the `linkdata` reference page.
- Observations that you brush display in the same color in all linked graphs. The color is the brush color you have selected in the window you are interacting with, and can differ from the brushing colors selected in the other affected figures. When you brush linked plots, the brushing color is associated with the variable(s) you brush

The last bullet implies that brush marks on an unlinked graph can change color when data linking is turned on for that figure. Brushing marks can, in fact, vanish and be replaced by marks in the same or different color when the plot enters a linked state. In the linked state, brushing is tied to variables (data sources), not just the graphics. If different observations for the same variable on a linked figure are brushed, those variables override the brushed graphics on the newly linked plot. In other words, the newly linked graph loses all its previous brush marks when it "joins the club" of common data sources.

Mouse Gestures for Data Brushing

You can brush graphs in several ways. The basic operation is to drag the mouse to highlight all observations within the rectangle you define. The following table lists data brushing gestures and their effects.

Action	Gesture	Result
Select data using a Region Of Interest	ROI mouse drag	Region of interest (ROI) rectangle (or rectangular prism for 3-D axes) appears during the gesture and all brushable observations within the

Action	Gesture	Result
		rectangle are highlighted. All other brushing marks in the axes are removed. The ROI rectangle disappears when the mouse button is released.
Select a single point	Single left-click on a graphic object that supports data brushing	Produces an equivalent result to ROI rectangle, brushing where the rectangle encloses only the single vertex on the graphical object closest to the mouse. All other brushing annotations in the figure are removed.
Add a point to the selection or remove a highlighted one	Single left-click on a graphic object that supports data brushing, with the **Shift** key down	Equivalent brushing by dragging an ROI rectangle that encloses only the single vertex on the graphic object closest to the mouse. All other brushed regions in the figure remain brushed.
Add to or subtract from region of interest	Click or ROI drag with the **Shift** or **Ctrl** keys down	Region of interest grows; all unbrushed vertices within the rectangle become brushed and all brushed observations in it become unbrushed. All brushed vertices outside the ROI remain brushed.

Brush Mode Callbacks

You can program the following callbacks for brush mode operations.

- `ActionPreCallback <function_handle>` — Function to execute before brushing

  Use this callback to execute code when a brush operation begins. The function handle should reference a function with two implicit arguments:

  ```
  function myfunction(src,event_data)
  % src         handle to the figure that has been clicked
  % event_data   object containing event data
  end
  ```

  The event data has the following property:

`Axes`	The handle of the axes that is being brushed

- `ActionPostCallback <function_handle>` — Function to execute after brushing

Use this callback to execute code when a brush operation ends. The function handle should reference a function with two implicit arguments:

```
function myfunction(src,event_data)
% src         handle to the figure that has been clicked
% event_data   object containing event data
%        (same as the event data of the
%             'ActionPreCallback' callback)
end
```

See Also

`linkaxes` | `pan` | `linkdata` | `rotate3d` | `zoom`

Topics

"Marking Up Graphs with Data Brushing"

bsxfun

Apply element-wise operation to two arrays with implicit expansion enabled

Syntax

```
C = bsxfun(fun,A,B)
```

Description

`C = bsxfun(fun,A,B)` applies the element-wise binary operation specified by the function handle `fun` to arrays `A` and `B`.

Examples

Deviation of Matrix Elements from Column Mean

Subtract the column mean from the corresponding column elements of a matrix `A`. Then normalize by the standard deviation.

```
A = [1 2 10; 3 4 20; 9 6 15];
C = bsxfun(@minus, A, mean(A));
D = bsxfun(@rdivide, C, std(A))
```

```
D =

   -0.8006   -1.0000   -1.0000
   -0.3203         0    1.0000
    1.1209    1.0000         0
```

In MATLAB® R2016b and later, you can directly use operators instead of `bsxfun`, since the operators independently support implicit expansion of arrays with compatible sizes.

```
(A - mean(A))./std(A)
```

```
ans =
```

```
   -0.8006   -1.0000   -1.0000
   -0.3203         0    1.0000
    1.1209    1.0000         0
```

Compare Vector Elements

Compare the elements in a column vector and a row vector. The result is a matrix containing the comparison of each combination of elements from the vectors. An equivalent way to execute this operation is with `A > B`.

```
A = [8; 17; 20; 24]
```

```
A =

     8
    17
    20
    24
```

```
B = [0 10 21]
```

```
B =

     0    10    21
```

```
C = bsxfun(@gt,A,B)
```

```
C = 4×3 logical array
   1   0   0
   1   1   0
   1   1   0
   1   1   1
```

Expansion with Custom Function

Create a function handle that represents the function $f(a,b) = a - e^b$.

```
fun = @(a,b) a - exp(b);
```

Use `bsxfun` to apply the function to vectors `a` and `b`. The `bsxfun` function expands the vectors into matrices of the same size, which is an efficient way to evaluate `fun` for many combinations of the inputs.

```
a = 1:7;
b = pi*[0 1/4 1/3 1/2 2/3 3/4 1].';
C = bsxfun(fun,a,b)
```

```
C =

         0    1.0000    2.0000    3.0000    4.0000    5.0000    6.0000
   -1.1933   -0.1933    0.8067    1.8067    2.8067    3.8067    4.8067
   -1.8497   -0.8497    0.1503    1.1503    2.1503    3.1503    4.1503
   -3.8105   -2.8105   -1.8105   -0.8105    0.1895    1.1895    2.1895
   -7.1205   -6.1205   -5.1205   -4.1205   -3.1205   -2.1205   -1.1205
   -9.5507   -8.5507   -7.5507   -6.5507   -5.5507   -4.5507   -3.5507
  -22.1407  -21.1407  -20.1407  -19.1407  -18.1407  -17.1407  -16.1407
```

Input Arguments

`fun` — Binary function to apply

function handle

Binary function to apply, specified as a function handle. `fun` must be a binary (two-input) element-wise function of the form `C = fun(A,B)` that accepts arrays `A` and `B` with compatible sizes. For more information, see "Compatible Array Sizes for Basic Operations". `fun` must support scalar expansion, such that if `A` or `B` is a scalar, then `C` is the result of applying the scalar to every element in the other input array.

In MATLAB R2016b and later, the built-in binary functions listed in this table independently support implicit expansion. With these functions, you can call the function or operator directly instead of using `bsxfun`. For example, you can replace `C = bsxfun(@plus,A,B)` with `A+B`.

Function	Symbol	Description
`plus`	`+`	Plus
`minus`	`-`	Minus
`times`	`.*`	Array multiply

Function	Symbol	Description
rdivide	./	Right array divide
ldivide	.\	Left array divide
power	.^	Array power
eq	==	Equal
ne	~=	Not equal
gt	>	Greater than
ge	>=	Greater than or equal to
lt	<	Less than
le	<=	Less than or equal to
and	&	Element-wise logical AND
or	|	Element-wise logical OR
xor	N/A	Logical exclusive OR
max	N/A	Binary maximum
min	N/A	Binary minimum
mod	N/A	Modulus after division
rem	N/A	Remainder after division
atan2	N/A	Four-quadrant inverse tangent; result in radians
atan2d	N/A	Four-quadrant inverse tangent; result in degrees
hypot	N/A	Square root of sum of squares

Example: `C = bsxfun(@plus,[1 2],[2; 3])`

Data Types: `function_handle`

A, B — Input arrays

scalars | vectors | matrices | multidimensional arrays

Input arrays, specified as scalars, vectors, matrices, or multidimensional arrays. Inputs A and B must have compatible sizes. For more information, see “Compatible Array Sizes

for Basic Operations". Whenever a dimension of A or B is singleton (equal to one), bsxfun virtually replicates the array along that dimension to match the other array. In the case where a dimension of A or B is singleton, and the corresponding dimension in the other array is zero, bsxfun virtually diminishes the singleton dimension to zero.

Data Types: single | double | uint8 | uint16 | uint32 | uint64 | int8 | int16 | int32 | int64 | char | logical
Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

arrayfun | repmat

Topics

"Array vs. Matrix Operations"

"Compatible Array Sizes for Basic Operations"

Introduced in R2007a

builddocsearchdb

Build searchable documentation database

Syntax

```
builddocsearchdb(folder)
```

Description

`builddocsearchdb(folder)` builds a searchable database, also referred to as a search index, from HTML files in the specified folder.

The `builddocsearchdb` function creates a subfolder, `helpsearch-v3`, to contain the database files. The database enables MATLAB to search for content within the HTML files assuming the MATLAB version is the same version used to create the database.

Beginning with MATLAB R2014b, you can maintain search indexes side by side. For instance, if you already have a search index for MATLAB R2014a or earlier, run `builddocsearchdb` against your help files using MATLAB R2014b or later. Then, when you run any MATLAB release, the help browser automatically uses the appropriate index for searching your documentation database.

Examples

Search Custom Help Files

Build a search database for custom help files.

MATLAB includes a set of sample files to demonstrate how to create a custom toolbox and supporting documentation. This sample toolbox is called the *Upslope Area Toolbox*. The `upslope` folder includes a file named `info.xml`, which is required to display custom documentation, and a subfolder named `html`, which contains HTML documentation and supporting files.

Copy the sample files to a temporary folder, and add the copied files to the path.

```
sample = fullfile(...
         matlabroot,'help','techdoc','matlab_env',...
         'examples','upslope');
tmp = tempname;
mkdir(tmp);
copyfile(sample,tmp);
addpath(tmp);
```

Create a search database.

```
folder = fullfile(tmp,'html');
builddocsearchdb(folder)
```

Under the Supplemental Software heading, click **Upslope Area Toolbox**.

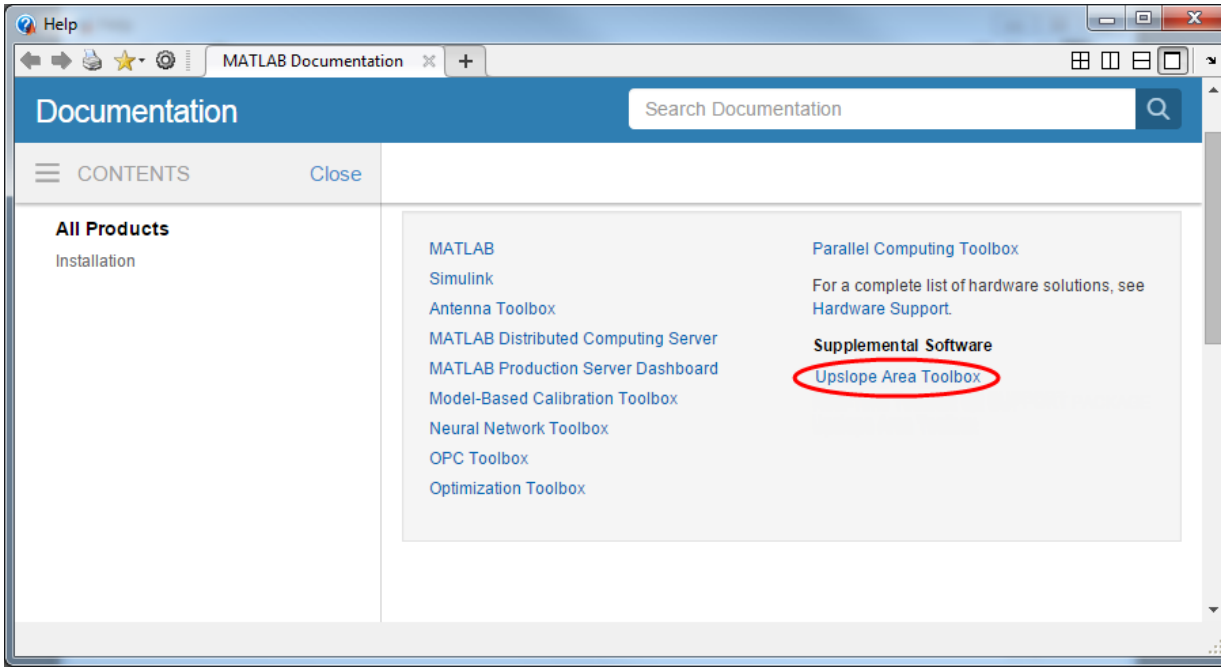

Search the supplemental documentation for the term *tarboton*, which appears in several of the example help files. The search returns several results from the Upslope Area Toolbox.

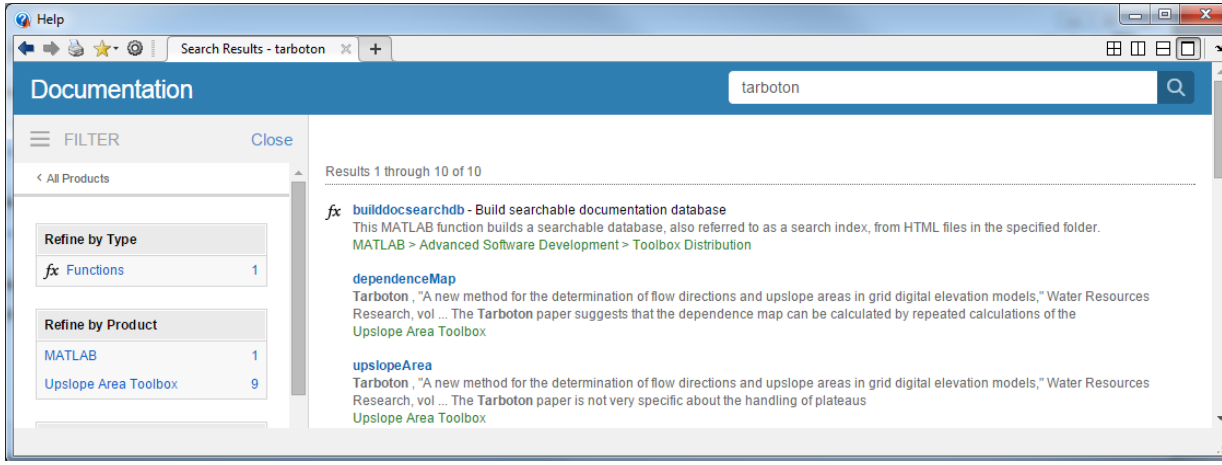

Remove the temporary example files.

```
rmpath(tmp)
rmdir(tmp,'s')
```

Note: Your help appears alongside the MathWorks documentation only when you are viewing installed documentation. If you are viewing documentation on the web, your documentation displays in a help browser separate from the MathWorks documentation.

Input Arguments

`folder` — Full path to folder with HTML files

character vector

Full path to a folder with HTML files, specified as a character vector. The folder must be:

- On the MATLAB search path
- Outside the *`matlabroot`* folder
- Outside any installed Hardware Support Package help folder

To include a particular HTML document in the search database, the `builddocsearchdb` function requires that:

- The document has a title.
- The content is different from the title.

Example: `builddocsearchdb('c:\myfiles\html')`

See Also

See Also

`doc` | `help`

Topics

"Display Custom Documentation"

Introduced in R2007a

builtin

Execute built-in function from overloaded method

Syntax

```
builtin(function,x1,...,xn)
[y1,...,yn] = builtin(function,x1,...,xn)
```

Description

`builtin(function,x1,...,xn)` executes the built-in `function` with the input arguments `x1` through `xn`. Use `builtin` to execute the original built-in from within a method that overloads the function. To work properly, you must never overload `builtin`.

`[y1,...,yn] = builtin(function,x1,...,xn)` stores any output from `function` in `y1` through `yn`.

Examples

Run an Overloaded Function within a Class Definition

Execute the built-in functionality from within an overloaded method.

Create a simple class describing the speed of a particle and providing a `disp` method by pasting the following code into a file called `MyParticle.m`.

```
classdef MyParticle
    properties
        velocity;
    end
    methods
        function p = MyParticle(x,y,z)
            p.velocity.x = x;
            p.velocity.y = y;
            p.velocity.z = z;
        end
```

```
        function disp(p)
            builtin('disp',p) % call builtin
            if isscalar(p)
                disp('  Velocity')
                disp(['  x: ',num2str(p.velocity.x)])
                disp(['  y: ',num2str(p.velocity.y)])
                disp(['  z: ',num2str(p.velocity.z)])
            end
        end
    end
end
```

Create an instance `MyParticle`.

```
p = MyParticle(1,2,4)
```

```
p =

  MyParticle

  Properties:
    velocity: [1x1 struct]

  Methods

  Velocity
  x: 1
  y: 2
  z: 4
```

Input Arguments

`function` — Built-in function name

string

Valid built-in function name in the MATLAB path, specified as a string. `function` cannot be a function handle.

`x1,...,xn` — Valid input arguments for `function`

supported data types

Valid input arguments for `function`, specified by supported data types.

Definitions

built-in function

A built-in function is part of the MATLAB executable. MATLAB does not implement these functions in the MATLAB language. Although most built-in functions have a `.m` file associated with them, this file only supplies documentation for the function.

You can use the syntax `which` *`function`* to check whether a function is built-in.

See Also

See Also

`feval` | `which`

Introduced before R2006a

bvp4c

Solve boundary value problems for ordinary differential equations

Syntax

```
sol = bvp4c(odefun,bcfun,solinit)
sol = bvp4c(odefun,bcfun,solinit,options)
solinit = bvpinit(x, yinit, params)
```

Arguments

`odefun`	A function handle that evaluates the differential equations $f(x,y)$. It can have the form
	`dydx = odefun(x,y)`
	`dydx = odefun(x,y,parameters)`
	
	For a scalar `x` and a column vector `y`, `odefun(x,y)` must return a column vector, `dydx`, representing $f(x,y)$. `parameters` is a vector of unknown parameters.

`bcfun`	A function handle that computes the residual in the boundary conditions. For two-point boundary value conditions of the form $bc(y(a),y(b))$, `bcfun` can have the form
	`res = bcfun(ya,yb)`
	`res = bcfun(ya,yb,parameters)`
	
	where `ya` and `yb` are column vectors corresponding to $y(a)$ and $y(b)$. `parameters` is a vector of unknown parameters. The output `res` is a column vector.
	
	See "Multipoint Boundary Value Problems" on page 1-914 for a description of `bcfun` for multipoint boundary value problems.

`solinit`	A structure containing the initial guess for a solution. You create `solinit` using the function `bvpinit`. `solinit` has the following fields.

	`x`	Ordered nodes of the initial mesh. Boundary conditions are imposed at a = `solinit.x(1)` and b = `solinit.x(end)`.
	`y`	Initial guess for the solution such that `solinit.y(:,i)` is a guess for the solution at the node `solinit.x(i)`.
	`parameters`	Optional. A vector that provides an initial guess for unknown parameters.
	The structure can have any name, but the fields must be named `x`, `y`, and `parameters`. You can form `solinit` with the helper function `bvpinit`. See `bvpinit` for details.	
`options`	Optional integration argument. A structure you create using the `bvpset` function. See `bvpset` for details.	

Description

`sol = bvp4c(odefun,bcfun,solinit)` integrates a system of ordinary differential equations of the form

$y' = f(x,y)$

on the interval [a,b] subject to two-point boundary value conditions $bc(y(a),y(b)) = 0$.

`odefun` and `bcfun` are function handles. See "Create Function Handle" for more information.

"Parameterizing Functions" explains how to provide additional parameters to the function `odefun`, as well as the boundary condition function `bcfun`, if necessary.

`bvp4c` can also solve multipoint boundary value problems. See "Multipoint Boundary Value Problems" on page 1-914. You can use the function `bvpinit` to specify the boundary points, which are stored in the input argument `solinit`. See the reference page for `bvpinit` for more information.

The `bvp4c` solver can also find unknown parameters p for problems of the form

$y' = f(x,y, p)$

$0 = bc(y(a),y(b),p)$

where p corresponds to `parameters`. You provide `bvp4c` an initial guess for any unknown parameters in `solinit.parameters`. The `bvp4c` solver returns the final values of these unknown parameters in `sol.parameters`.

`bvp4c` produces a solution that is continuous on `[a,b]` and has a continuous first derivative there. Use the function `deval` and the output `sol` of `bvp4c` to evaluate the solution at specific points `xint` in the interval `[a,b]`.

```
sxint = deval(sol,xint)
```

The structure `sol` returned by `bvp4c` has the following fields:

`sol.x`	Mesh selected by `bvp4c`
`sol.y`	Approximation to $y(x)$ at the mesh points of `sol.x`
`sol.yp`	Approximation to $y'(x)$ at the mesh points of `sol.x`
`sol.parameters`	Values returned by `bvp4c` for the unknown parameters, if any
`sol.solver`	`'bvp4c'`
`sol.stats`	Computational cost statistics (also displayed when the `stats` option is set with `bvpset`).

The structure `sol` can have any name, and `bvp4c` creates the fields `x`, `y`, `yp`, `parameters`, and `solver`.

`sol = bvp4c(odefun,bcfun,solinit,options)` solves as above with default integration properties replaced by the values in `options`, a structure created with the `bvpset` function. See `bvpset` for details.

`solinit = bvpinit(x, yinit, params)` forms the initial guess `solinit` with the vector `params` of guesses for the unknown parameters.

Singular Boundary Value Problems

`bvp4c` solves a class of singular boundary value problems, including problems with unknown parameters `p`, of the form

$y' = S \cdot y/x + F(x,y,p)$
$0 = bc(y(0),y(b),p)$

The interval is required to be [0, b] with $b > 0$. Often such problems arise when computing a smooth solution of ODEs that result from partial differential equations (PDEs) due to cylindrical or spherical symmetry. For singular problems, you specify the (constant) matrix `S` as the value of the `'SingularTerm'` option of `bvpset`, and `odefun` evaluates only $f(x,y,p)$. The boundary conditions must be consistent with the necessary condition $S \cdot y(0) = 0$ and the initial guess should satisfy this condition.

Multipoint Boundary Value Problems

`bvp4c` can solve multipoint boundary value problems where $a = a_0 < a_1 < a_2 < ... < a_n = b$ are boundary points in the interval $[a,b]$. The points $a_1,a_2,...,a_{n-1}$ represent interfaces that divide $[a,b]$ into regions. `bvp4c` enumerates the regions from left to right (from a to b), with indices starting from 1. In region k, $[a_{k-1},a_k]$, `bvp4c` evaluates the derivative as

```
yp = odefun(x,y,k)
```

In the boundary conditions function

```
bcfun(yleft,yright)
```

`yleft(:,k)` is the solution at the left boundary of $[a_{k-1},a_k]$. Similarly, `yright(:,k)` is the solution at the right boundary of region k. In particular,

```
yleft(:,1) = y(a)
```

and

```
yright(:,end) = y(b)
```

When you create an initial guess with

```
solinit = bvpinit(xinit,yinit),
```

use double entries in `xinit` for each interface point. See the reference page for `bvpinit` for more information.

If `yinit` is a function, `bvpinit` calls `y = yinit(x,k)` to get an initial guess for the solution at `x` in region `k`. In the solution structure `sol` returned by `bpv4c`, `sol.x` has

double entries for each interface point. The corresponding columns of `sol.y` contain the left and right solution at the interface, respectively.

To see an example that solves a three-point boundary value problem, type `threebvp` at the MATLAB command prompt.

Note: The `bvp5c` function is used exactly like `bvp4c`, with the exception of the meaning of error tolerances between the two solvers. If $S(x)$ approximates the solution $y(x)$, `bvp4c` controls the residual $|S'(x) - f(x,S(x))|$. This controls indirectly the true error $|y(x) - S(x)|$. `bvp5c` controls the true error directly.

Examples

Using Initial Guess to Indicate Desired Solution

Boundary value problems can have multiple solutions. One purpose of the initial guess is to indicate which solution, among several, that you want.

The second-order differential equation

$$y'' + |y| = 0$$

has exactly two solutions that satisfy the boundary conditions

$$y(0) = 0,$$

$$y(4) = -2.$$

Before using `bvp4c` to solve the problem, you need to rewrite the differential equation as a system of two first-order ODEs,

$$y_1' = y_2,$$

$$y_2' = -|y_1|,$$

where $y_1 = y$ and $y_2 = y'$. This system has the required form

$$y' = f(x, y),$$

$$bc(y(a), y(b)) = 0.$$

The function, *f*, and the boundary conditions, *bc*, are coded in MATLAB as the functions `twoode` and `twobc`.

```
function dydx = twoode(x,y)
dydx = [ y(2); -abs(y(1)) ];

function res = twobc(ya,yb)
res = [ ya(1); yb(1) + 2 ];
```

Form a guess structure consisting of an initial mesh of five equally spaced points in [0,4] and a guess of the constant values

$$y_1(x) = 1,$$

$$y_2(x) = 0.$$

```
solinit = bvpinit(linspace(0,4,5),[1 0]);
```

Solve the problem using `bvp4c`.

```
sol = bvp4c(@twoode,@twobc,solinit);
```

Evaluate the numerical solution at 100 equally spaced points and plot *y(x)*.

```
x = linspace(0,4);
y = deval(sol,x);
plot(x,y(1,:))
```

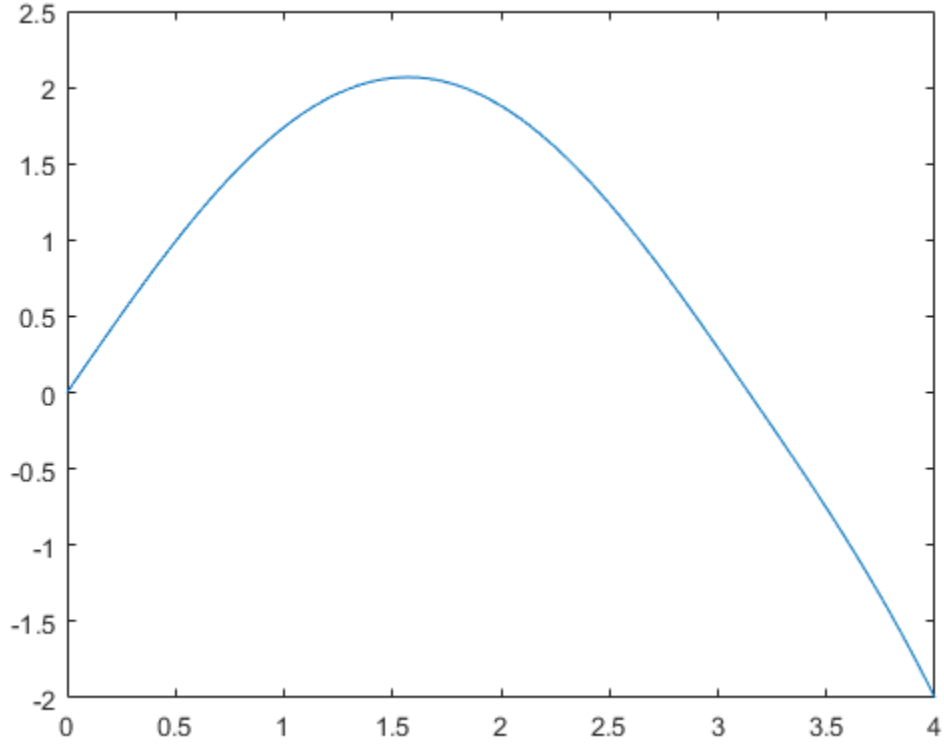

To obtain the other solution of this problem, use the initial guess

$$y_1(x) = -1,$$

$$y_2(x) = 0.$$

```
solinit = bvpinit(linspace(0,4,5),[-1 0]);
sol = bvp4c(@twoode,@twobc,solinit);
x = linspace(0,4);
y = deval(sol,x);
plot(x,y(1,:))
```

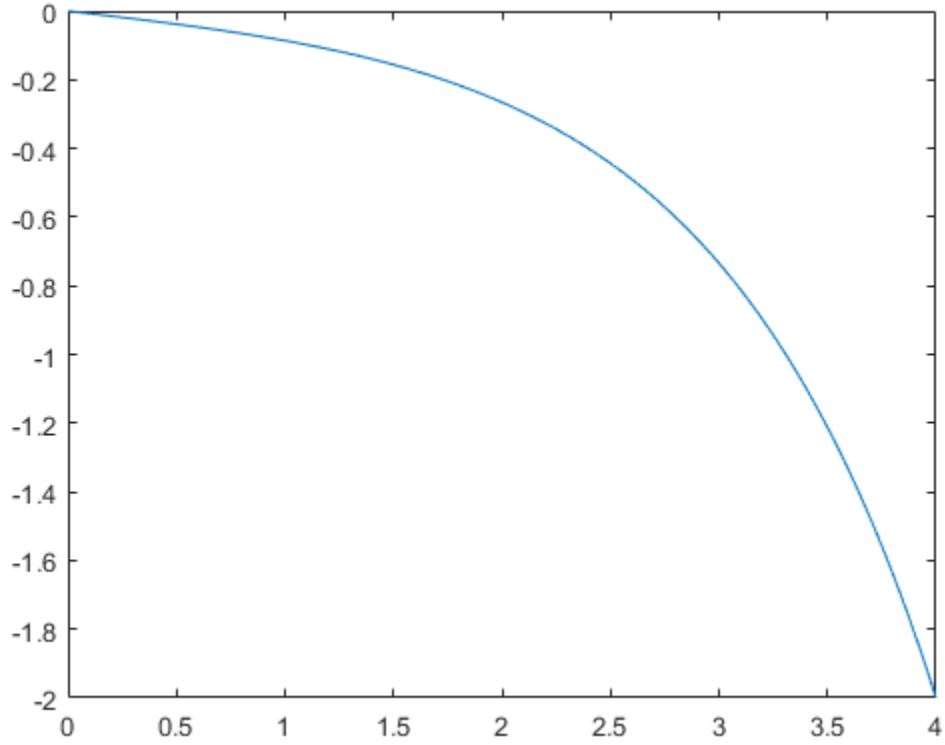

Compute Fourth Eigenvalue of Mathieu's Equation

This boundary value problem involves an unknown parameter. The task is to compute the fourth ($q = 5$) eigenvalue λ of Mathieu's equation

$y'' + (\lambda - 2q \cos 2x)y = 0.$

Because the unknown parameter λ is present, this second-order differential equation is subject to *three* boundary conditions:
$y'(0) = 0$
$y'(\pi) = 0$
$y(0) = 1$

It is convenient to use local functions to place all the functions required by `bvp4c` in a single file.

```
function mat4bvp

lambda = 15;
solinit = bvpinit(linspace(0,pi,10),@mat4init,lambda);
sol = bvp4c(@mat4ode,@mat4bc,solinit);

fprintf('The fourth eigenvalue is approximately %7.3f.\n',...
        sol.parameters)

xint = linspace(0,pi);
Sxint = deval(sol,xint);
plot(xint,Sxint(1,:))
axis([0 pi -1 1.1])
title('Eigenfunction of Mathieu''s equation.')
xlabel('x')
ylabel('solution y')
% ------------------------------------------------------------
function dydx = mat4ode(x,y,lambda)
q = 5;
dydx = [  y(2)
         -(lambda - 2*q*cos(2*x))*y(1) ];
% ------------------------------------------------------------
function res = mat4bc(ya,yb,lambda)
res = [  ya(2)
         yb(2)
        ya(1)-1 ];
% ------------------------------------------------------------
function yinit = mat4init(x)
yinit = [  cos(4*x)
          -4*sin(4*x) ];
```

The differential equation (converted to a first-order system) and the boundary conditions are coded as local functions `mat4ode` and `mat4bc`, respectively. Because unknown parameters are present, these functions must accept three input arguments, even though some of the arguments are not used.

The guess structure `solinit` is formed with `bvpinit`. An initial guess for the solution is supplied in the form of a function `mat4init`. We chose $y = \cos 4x$ because it satisfies the boundary conditions and has the correct qualitative behavior (the correct number of sign changes). In the call to `bvpinit`, the third argument (`lambda = 15`) provides an initial guess for the unknown parameter λ.

After the problem is solved with `bvp4c`, the field `sol.parameters` returns the value λ = 17.097, and the plot shows the eigenfunction associated with this eigenvalue.

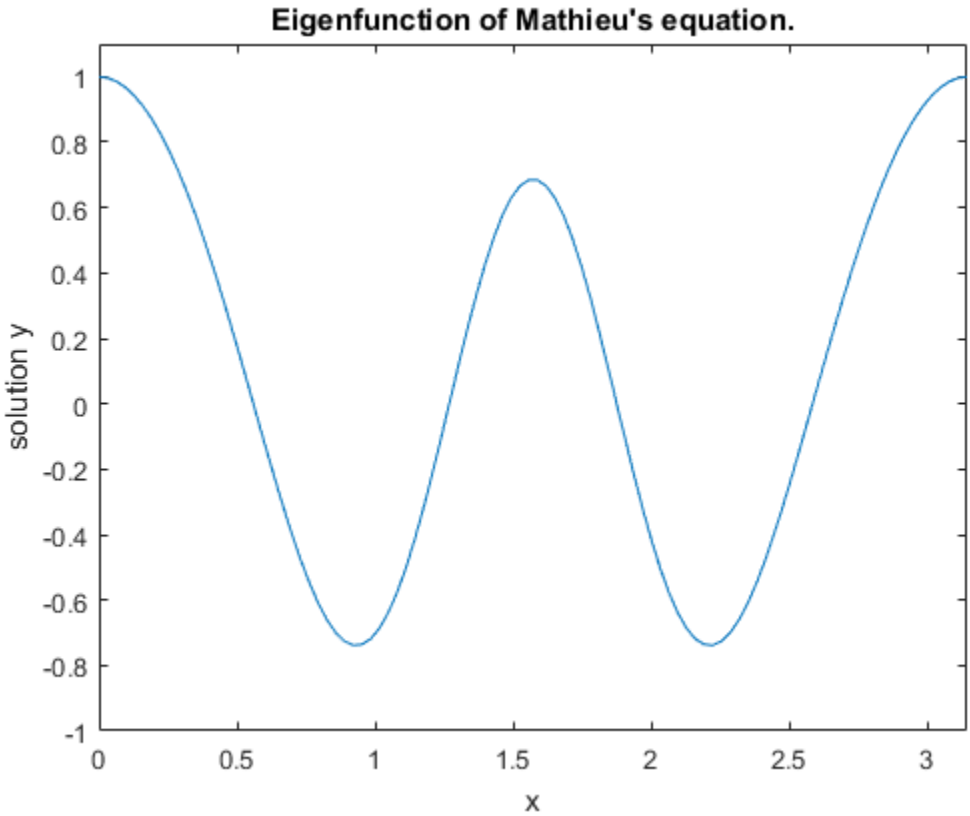

Algorithms

`bvp4c` is a finite difference code that implements the three-stage Lobatto IIIa formula. This is a collocation formula and the collocation polynomial provides a C^1-continuous solution that is fourth-order accurate uniformly in `[a,b]`. Mesh selection and error control are based on the residual of the continuous solution.

References

[1] Shampine, L.F., M.W. Reichelt, and J. Kierzenka, "Solving Boundary Value Problems for Ordinary Differential Equations in MATLAB with bvp4c"

See Also

See Also

`bvp5c` | `bvpget` | `bvpinit` | `bvpset` | `bvpxtend` | `deval`

Topics

"Create Function Handle"

Introduced before R2006a

bvp5c

Solve boundary value problems for ordinary differential equations

Syntax

```
sol = bvp5c(odefun,bcfun,solinit)
sol = bvp5c(odefun,bcfun,solinit,options)
solinit = bvpinit(x, yinit, params)
```

Arguments

`odefun`	A function handle that evaluates the differential equations $f(x,y)$. It can have the form
	`dydx = odefun(x,y)`
	`dydx = odefun(x,y,parameters)`
	For a scalar `x` and a column vector `y`, `odefun(x,y)` must return a column vector, `dydx`, representing $f(x,y)$. `parameters` is a vector of unknown parameters.	

`bcfun`	A function handle that computes the residual in the boundary conditions. For two-point boundary value conditions of the form $bc(y(a),y(b))$, `bcfun` can have the form
	`res = bcfun(ya,yb)`
	`res = bcfun(ya,yb,parameters)`
	where `ya` and `yb` are column vectors corresponding to $y(a)$ and $y(b)$. `parameters` is a vector of unknown parameters. The output `res` is a column vector.	

`solinit`	A structure containing the initial guess for a solution. You create `solinit` using the function `bvpinit`. `solinit` has the following fields.	
	`x`	Ordered nodes of the initial mesh. Boundary conditions are imposed at a = `solinit.x(1)` and b = `solinit.x(end)`.

	`y`	Initial guess for the solution such that `solinit.y(:,i)` is a guess for the solution at the node `solinit.x(i)`.
	`parameters`	Optional. A vector that provides an initial guess for unknown parameters.
	The structure can have any name, but the fields must be named `x`, `y`, and `parameters`. You can form `solinit` with the helper function `bvpinit`. See `bvpinit` for details.	
`options`	Optional integration argument. A structure you create using the `bvpset` function. See `bvpset` for details.	

Description

`sol = bvp5c(odefun,bcfun,solinit)` integrates a system of ordinary differential equations of the form
$y' = f(x,y)$

on the interval [a,b] subject to two-point boundary value conditions
$bc(y(a),y(b)) = 0$

`odefun` and `bcfun` are function handles. See "Create Function Handle" for more information.

"Parameterizing Functions" explains how to provide additional parameters to the function `odefun`, as well as the boundary condition function `bcfun`, if necessary. You can use the function `bvpinit` to specify the boundary points, which are stored in the input argument `solinit`.

The `bvp5c` solver can also find unknown parameters p for problems of the form
$y' = f(x,y,p)$
$0 = bc(y(a),y(b),p)$

where p corresponds to `parameters`. You provide `bvp5c` an initial guess for any unknown parameters in `solinit.parameters`. The `bvp5c` solver returns the final values of these unknown parameters in `sol.parameters`.

`bvp5c` produces a solution that is continuous on `[a,b]` and has a continuous first derivative there. Use the function `deval` and the output `sol` of `bvp5c` to evaluate the solution at specific points `xint` in the interval `[a,b]`.

```
sxint = deval(sol,xint)
```

The structure `sol` returned by `bvp5c` has the following fields:

`sol.x`	Mesh selected by `bvp5c`
`sol.y`	Approximation to $y(x)$ at the mesh points of `sol.x`
`sol.parameters`	Values returned by `bvp5c` for the unknown parameters, if any
`sol.solver`	`'bvp5c'`
`sol.stats`	Computational cost statistics (also displayed when the `stats` option is set with `bvpset`).

The structure `sol` can have any name, and `bvp5c` creates the fields `x`, `y`, `parameters`, and `solver`.

`sol = bvp5c(odefun,bcfun,solinit,options)` solves as above with default integration properties replaced by the values in `options`, a structure created with the `bvpset` function. See `bvpset` for details.

`solinit = bvpinit(x, yinit, params)` forms the initial guess `solinit` with the vector `params` of guesses for the unknown parameters.

Singular Boundary Value Problems

`bvp5c` solves a class of singular boundary value problems, including problems with unknown parameters `p`, of the form
$y' = S \cdot y/x + f(x,y,p)$
$0 = bc(y(0),y(b),p)$

The interval is required to be $[0, b]$ with $b > 0$. Often such problems arise when computing a smooth solution of ODEs that result from partial differential equations (PDEs) due to cylindrical or spherical symmetry. For singular problems, you specify the (constant) matrix `S` as the value of the `'SingularTerm'` option of `bvpset`, and `odefun` evaluates only $f(x,y,p)$. The boundary conditions must be consistent with the necessary condition $S \cdot y(0) = 0$ and the initial guess should satisfy this condition.

Multipoint Boundary Value Problems

`bvp5c` can solve multipoint boundary value problems where $a = a_0 < a_1 < a_2 < \ldots < a_n = b$ are boundary points in the interval $[a,b]$. The points $a_1, a_2, \ldots, a_{n-1}$ represent interfaces

that divide $[a,b]$ into regions. `bvp5c` enumerates the regions from left to right (from a to b), with indices starting from 1. In region k, $[a_{k-1},a_k]$, `bvp5c` evaluates the derivative as

```
yp = odefun(x,y,k)
```

In the boundary conditions function

```
bcfun(yleft,yright)
```

yleft(:, k) is the solution at the left boundary of $[a_{k-1},a_k]$. Similarly, `yright(:,k)` is the solution at the right boundary of region k. In particular,

```
yleft(:,1) = y(a)
```

and

```
yright(:,end) = y(b)
```

When you create an initial guess with

```
solinit = bvpinit(xinit,yinit),
```

use double entries in `xinit` for each interface point. See the reference page for `bvpinit` for more information.

If `yinit` is a function, `bvpinit` calls `y = yinit(x, k)` to get an initial guess for the solution at `x` in region `k`. In the solution structure `sol` returned by `bvp5c`, `sol.x` has double entries for each interface point. The corresponding columns of `sol.y` contain the left and right solution at the interface, respectively.

To see an example of that solves a three-point boundary value problem, type `threebvp` at the MATLAB command prompt.

Note: The `bvp5c` function is used exactly like `bvp4c`, with the exception of the meaning of error tolerances between the two solvers. If $S(x)$ approximates the solution $y(x)$, `bvp4c` controls the residual $|S'(x) - f(x,S(x))|$. This controls indirectly the true error $|y(x) - S(x)|$. `bvp5c` controls the true error directly.

Algorithms

`bvp5c` is a finite difference code that implements the four-stage Lobatto IIIa formula. This is a collocation formula and the collocation polynomial provides a C^1-continuous

solution that is fifth-order accurate uniformly in `[a,b]`. The formula is implemented as an implicit Runge-Kutta formula. `bvp5c` solves the algebraic equations directly; `bvp4c` uses analytical condensation. `bvp4c` handles unknown parameters directly; while `bvp5c` augments the system with trivial differential equations for unknown parameters.

References

[1] Shampine, L.F., M.W. Reichelt, and J. Kierzenka "Solving Boundary Value Problems for Ordinary Differential Equations in MATLAB with bvp4c"

Note: This tutorial uses the `bvp4c` function, however in most cases the solvers can be used interchangeably.

See Also

See Also

`bvp4c` | `bvpget` | `bvpinit` | `bvpset` | `bvpxtend` | `deval`

Topics

"Create Function Handle"

bvpget

Extract properties from options structure created with bvpset

Syntax

```
val = bvpget(options,'name')
val = bvpget(options,'name',default)
```

Description

`val = bvpget(options,'name')` extracts the value of the named property from the structure `options`, returning an empty matrix if the property value is not specified in `options`. It is sufficient to type only the leading characters that uniquely identify the property. Case is ignored for property names. `[]` is a valid `options` argument.

`val = bvpget(options,'name',default)` extracts the named property as above, but returns `val = default` if the named property is not specified in `options`. For example,

```
val = bvpget(options,'RelTol',1e-4);
```

returns `val = 1e-4` if the `RelTol` is not specified in `options`.

See Also

`bvp4c` | `bvp5c` | `bvpinit` | `bvpset` | `deval`

Introduced before R2006a

bvpinit

Form initial guess for BVP solvers

Syntax

```
solinit = bvpinit(x,yinit)
solinit = bvpinit(x,yinit,parameters)
solinit = bvpinit(sol,[anew bnew])
solinit = bvpinit(sol,[anew bnew],parameters)
```

Description

`solinit = bvpinit(x,yinit)` forms the initial guess for a boundary value problem solver.

`x` is a vector that specifies an initial mesh. If you want to solve the BVP on [a,b], then specify `x(1)` as a and `x(end)` as b. The solver adapts this mesh to the solution, so a guess like `xb=nlinspace(a,b,10)` often suffices. However, in difficult cases, you should place mesh points where the solution changes rapidly. The entries of `x` must be in

- Increasing order if $a<b$
- Decreasing order if $a>b$

For two-point boundary value problems, the entries of `x` must be distinct. That is, if $a<b$, the entries must satisfy `x(1)` < `x(2)` < ... < `x(end)`. If $a>b$, the entries must satisfy `x(1)` > `x(2)` > ... > `x(end)`

For multipoint boundary value problem, you can specify the points in [a,b] at which the boundary conditions apply, other than the endpoints a and b, by repeating their entries in `x`. For example, if you set

```
x = [0, 0.5, 1, 1,  1.5, 2];
```

the boundary conditions apply at three points: the endpoints `0` and `2`, and the repeated entry 1. In general, repeated entries represent boundary points between regions in [a,b]. In the preceding example, the repeated entry 1 divides the interval `[0,2]` into two regions: `[0,1]` and `[1,2]`.

`yinit` is a guess for the solution. It can be either a vector, or a function:

- Vector – For each component of the solution, `bvpinit` replicates the corresponding element of the vector as a constant guess across all mesh points. That is, `yinit(i)` is a constant guess for the `i`th component `yinit(i,:)` of the solution at all the mesh points in `x`.
- Function – For a given mesh point, the guess function must return a vector whose elements are guesses for the corresponding components of the solution. The function must be of the form

  ```
  y = guess(x)
  ```

  where `x` is a mesh point and `y` is a vector whose length is the same as the number of components in the solution. For example, if the guess function is a function, `bvpinit` calls

  ```
  y(:,j) = guess(x(j))
  ```

  at each mesh point.

  For multipoint boundary value problems, the guess function must be of the form

  ```
  y = guess(x, k)
  ```

  where `y` an initial guess for the solution at `x` in region `k`. The function must accept the input argument `k`, which is provided for flexibility in writing the guess function. However, the function is not required to use `k`.

`solinit = bvpinit(x,yinit,parameters)` indicates that the boundary value problem involves unknown parameters. Use the vector `parameters` to provide a guess for all unknown parameters.

`solinit` is a structure with the following fields. The structure can have any name, but the fields must be named `x`, `y`, and `parameters`.

`x`	Ordered nodes of the initial mesh.
`y`	Initial guess for the solution with `solinit.y(:,i)` a guess for the solution at the node `solinit.x(i)`.
`parameters`	Optional. A vector that provides an initial guess for unknown parameters.

`solinit = bvpinit(sol,[anew bnew])` forms an initial guess on the interval `[anew bnew]` from a solution `sol` on an interval $[a,b]$. The new interval must be larger than the previous one, so either `anew <=` $a < b$ `<= bnew` or `anew >=` $a > b$ `>= bnew`. The solution `sol` is extrapolated to the new interval. If `sol` contains `parameters`, they are copied to `solinit`.

`solinit = bvpinit(sol,[anew bnew],parameters)` forms `solinit` as described above, but uses `parameters` as a guess for unknown parameters in `solinit`.

See Also

See Also

`bvp4c` | `bvp5c` | `bvpget` | `bvpset` | `bvpxtend` | `deval`

Topics

"Create Function Handle"

Introduced before R2006a

bvpset

Create or alter options structure of boundary value problem

Syntax

```
options = bvpset('name1',value1,'name2',value2,...)
options = bvpset(oldopts,'name1',value1,...)
options = bvpset(oldopts,newopts)
bvpset
```

Description

`options = bvpset('name1',value1,'name2',value2,...)` creates a structure `options` that you can supply to the boundary value problem solver `bvp4c`, in which the named properties have the specified values. Any unspecified properties retain their default values. For all properties, it is sufficient to type only the leading characters that uniquely identify the property. `bvpset` ignores case for property names.

`options = bvpset(oldopts,'name1',value1,...)` alters an existing options structure `oldopts`. This overwrites any values in `oldopts` that are specified using name/value pairs and returns the modified structure as the output argument.

`options = bvpset(oldopts,newopts)` combines an existing options structure `oldopts` with a new options structure `newopts`. Any values set in `newopts` overwrite the corresponding values in `oldopts`.

`bvpset` with no input arguments displays all property names and their possible values, indicating defaults with braces `{}`.

You can use the function `bvpget` to query the `options` structure for the value of a specific property.

BVP Properties

`bvpset` enables you to specify properties for the boundary value problem solver `bvp4c`. There are several categories of properties that you can set:

- "Error Tolerance Properties" on page 1-932
- "Vectorization" on page 1-933
- "Analytical Partial Derivatives" on page 1-934
- "Singular BVPs" on page 1-935
- "Mesh Size Property" on page 1-935
- "Solution Statistic Property" on page 1-936

Error Tolerance Properties

Because `bvp4c` uses a collocation formula, the numerical solution is based on a mesh of points at which the collocation equations are satisfied. Mesh selection and error control are based on the residual of this solution, such that the computed solution $S(x)$ is the exact solution of a perturbed problem $S'(x) = f(x,S(x)) + res(x)$. On each subinterval of the mesh, a norm of the residual in the `i`th component of the solution, `res(i)`, is estimated and is required to be less than or equal to a tolerance. This tolerance is a function of the relative and absolute tolerances, `RelTol` and `AbsTol`, defined by the user.

$$\left\| \left(\mathrm{res}(i) / \max\left(\mathrm{abs}\left(f(i)\right), \mathrm{AbsTol}(i) / \mathrm{RelTol}\right)\right) \right\| \le \mathrm{RelTol}$$

The following table describes the error tolerance properties.

BVP Error Tolerance Properties

Property	Value	Description
`RelTol`	Positive scalar {`1e-3`}	A relative error tolerance that applies to all components of the residual vector. It is a measure of the residual relative to the size of $f(x,y)$. The default, `1e-3`, corresponds to 0.1% accuracy. The computed solution $S(x)$ is the exact solution of $S'(x) = F(x,S(x)) + \mathrm{res}(x)$. On each subinterval of the mesh, the residual $\mathrm{res}(x)$ satisfies $\left\| \left(\mathrm{res}(i) / \max\left(\mathrm{abs}\left(F(i)\right), \mathrm{AbsTol}(i) / \mathrm{RelTol}\right)\right) \right\| \le \mathrm{RelTol}$
`AbsTol`	Positive scalar or vector {`1e-6`}	Absolute error tolerances that apply to the corresponding components of the residual vector. `AbsTol(i)` is a threshold below which the values of the corresponding components are

Property	Value	Description
		unimportant. If a scalar value is specified, it applies to all components.

Vectorization

The following table describes the BVP vectorization property. Vectorization of the ODE function used by `bvp4c` differs from the vectorization used by the ODE solvers:

- For `bvp4c`, the ODE function must be vectorized with respect to the first argument as well as the second one, so that `F([x1 x2 ...],[y1 y2 ...])` returns `[F(x1,y1) F(x2,y2)...]`.
- `bvp4c` benefits from vectorization even when analytical Jacobians are provided. For stiff ODE solvers, vectorization is ignored when analytical Jacobians are used.

Vectorization Properties

Property	Value	Description

`Vectorized`	`on` | {`off`}	Set on to inform `bvp4c` that you have coded the ODE function F so that `F([x1 x2 ...],[y1 y2 ...])` returns `[F(x1,y1) F(x2,y2) ...]`. That is, your ODE function can pass to the solver a whole array of column vectors at once. This enables the solver to reduce the number of function evaluations and may significantly reduce solution time.
		
		With the MATLAB array notation, it is typically an easy matter to vectorize an ODE function. In the `shockbvp` example shown previously, the shockODE function has been vectorized using colon notation into the subscripts and by using the array multiplication (`.*`) operator.
		
		`function dydx = shockODE(x,y,e)`
		`pix = pi*x;`
		`dydx = [ y(2,:)...`
		`-x/e.*y(2,:)-pi^2*cos(pix)-`
		`pix/e.*sin(pix)];`

Analytical Partial Derivatives

By default, the `bvp4c` solver approximates all partial derivatives with finite differences. `bvp4c` can be more efficient if you provide analytical partial derivatives $\partial f/\partial y$ of the differential equations, and analytical partial derivatives, $\partial bc/\partial ya$ and $\partial bc/\partial yb$, of the boundary conditions. If the problem involves unknown parameters, you must also provide partial derivatives, $\partial f/\partial p$ and $\partial bc/\partial p$, with respect to the parameters.

The following table describes the analytical partial derivatives properties.

BVP Analytical Partial Derivative Properties

Property	Value	Description
`FJacobian`	Function handle	A function handle that computes the analytical partial derivatives of $f(x,y)$. When solving $y' = f(x,y)$, set this property to `@fjac` if `dfdy = fjac(x,y)` evaluates the Jacobian $\partial f/\partial y$. If the problem involves unknown parameters p, `[dfdy,dfdp] = fjac(x,y,p)` must also return the partial derivative $\partial f/\partial p$. For problems with constant partial derivatives, set this property to the value of `dfdy` or to a cell array `{dfdy,dfdp}`.
`BCJacobian`	Function handle	A function handle that computes the analytical partial derivatives of $bc(ya,yb)$. For boundary conditions $bc(ya,yb)$, set this property to `@bcjac` if `[dbcdya,dbcdyb] = bcjac(ya,yb)` evaluates the partial derivatives $\partial bc/\partial ya$, and $\partial bc/\partial yb$. If the problem involves unknown parameters p, `[dbcdya,dbcdyb,dbcdp] = bcjac(ya,yb,p)` must also return the partial derivative $\partial bc/\partial p$. For problems with constant partial derivatives, set this property to a cell array `{dbcdya,dbcdyb}` or `{dbcdya,dbcdyb,dbcdp}`.

Singular BVPs

`bvp4c` can solve singular problems of the form

$$y' = S\frac{y}{x} + f(x, y, p)$$

posed on the interval $[0,b]$ where $b > 0$. For such problems, specify the constant matrix S as the value of `SingularTerm`. For equations of this form, `odefun` evaluates only the $f(x,y,p)$ term, where p represents unknown parameters, if any.

Singular BVP Property

Property	Value	Description
`SingularTerm`	Constant matrix	Singular term of singular BVPs. Set to the constant matrix S for equations of the form $$y' = S\frac{y}{x} + f(x, y, p)$$ posed on the interval $[0,b]$ where $b > 0$.

Mesh Size Property

`bvp4c` solves a system of algebraic equations to determine the numerical solution to a BVP at each of the mesh points. The size of the algebraic system depends on the number of differential equations (`n`) and the number of mesh points in the current mesh (`N`). When the allowed number of mesh points is exhausted, the computation stops, `bvp4c` displays a warning message and returns the solution it found so far. This solution does not satisfy the error tolerance, but it may provide an excellent initial guess for computations restarted with relaxed error tolerances or an increased value of `NMax`.

The following table describes the mesh size property.

BVP Mesh Size Property

Property	Value	Description
`NMax`	positive integer {`floor(1000/n)`}	Maximum number of mesh points allowed when solving the BVP, where `n` is the

Property	Value	Description
		number of differential equations in the problem. The default value of `NMax` limits the size of the algebraic system to about 1000 equations. For systems of a few differential equations, the default value of `NMax` should be sufficient to obtain an accurate solution.

Solution Statistic Property

The `Stats` property lets you view solution statistics.

The following table describes the solution statistics property.

BVP Solution Statistic Property

Property	Value	Description
`Stats`	`on` | {`off`}	Specifies whether statistics about the computations are displayed. If the `stats` property is `on`, after solving the problem, `bvp4c` displays: • The number of points in the mesh • The maximum residual of the solution • The number of times it called the differential equation function `odefun` to evaluate $f(x,y)$ • The number of times it called the boundary condition function `bcfun` to evaluate $bc(y(a),y(b))$

Examples

To create an options structure that changes the relative error tolerance of `bvp4c` from the default value of `1e-3` to `1e-4`, enter

```
options = bvpset('RelTol',1e-4);
```

To recover the value of `'RelTol'` from `options`, enter

```
bvpget(options,'RelTol')

ans =

  1.0000e-004
```

See Also

See Also

`bvp4c` | `bvp5c` | `bvpget` | `bvpinit` | `deval`

Topics

"Create Function Handle"

Introduced before R2006a

bvpxtend

Form guess structure for extending boundary value solutions

Syntax

```
solinit = bvpxtend(sol,xnew,ynew)
solinit = bvpxtend(sol,xnew,extrap)
solinit = bvpxtend(sol,xnew)
solinit = bvpxtend(sol,xnew,ynew,pnew)
solinit = bvpxtend(sol,xnew,extrap,pnew)
```

Description

`solinit = bvpxtend(sol,xnew,ynew)` uses solution `sol` computed on `[a,b]` to form a solution guess for the interval extended to `xnew`. The extension point `xnew` must be outside the interval `[a,b]`, but on either side. The vector `ynew` provides an initial guess for the solution at `xnew`.

`solinit = bvpxtend(sol,xnew,extrap)` forms the guess at `xnew` by extrapolating the solution `sol`. `extrap` has three possible values:

- `'constant'` — `ynew` is a value nearer to end point of solution in `sol`.
- `'linear'` — `ynew` is a value at `xnew` of linear interpolant to the value and slope at the nearer end point of solution in `sol`.
- `'solution'` — `ynew` is the value of (cubic) solution in `sol` at `xnew`.

The value of `extrap` is case-insensitive and only the leading, unique portion needs to be specified.

`solinit = bvpxtend(sol,xnew)` uses the extrapolating solution where `extrap` is `'constant'`. If there are unknown parameters, values present in `sol` are used as the initial guess for parameters in `solinit`.

`solinit = bvpxtend(sol,xnew,ynew,pnew)` specifies a different guess `pnew`. `pnew` can be used with extrapolation, using the syntax `solinit = bvpxtend(sol,xnew,extrap,pnew)`. To modify parameters without changing the interval, use `[]` as place holder for `xnew` and `ynew`.

See Also

bvp4c | bvp5c | bvpinit

caldays

Calendar duration in days

Syntax

```
D = caldays(X)
```

Description

`D = caldays(X)` returns an array representing calendar days equivalent to the values in array `X`.

- If `X` is a numeric array, then `D` is a `calendarDuration` array with each element equal to the number of calendar days in the corresponding element of `X`. Calendar days account for Daylight Saving Time shifts when used in calendar calculations.
- If `X` is a `calendarDuration` array, then `D` is a `double` array with each element equal to the number of whole calendar days in the corresponding element of `X`.

Examples

Create Array of Calendar Days

```
X = magic(5);
D = caldays(X)
```

```
D = 5×5 calendarDuration array
   17d   24d    1d    8d   15d
   23d    5d    7d   14d   16d
    4d    6d   13d   20d   22d
   10d   12d   19d   21d    3d
   11d   18d   25d    2d    9d
```

Convert Calendar Durations to Calendar Days

Create an array of calendar durations. Then, convert each value to the equivalent number of whole calendar days.

```
X = caldays(8:10) + hours(1.2345)
```

```
X = 1×3 calendarDuration array
    8d 1h 14m 4.2s    9d 1h 14m 4.2s   10d 1h 14m 4.2s
```

```
D = caldays(X)
```

```
D =

     8     9    10
```

`caldays` returns a numeric array.

Current Time at Future Date

Add two calendar days to the current date and time.

```
t = datetime('now') + caldays(2)
```

```
t = datetime
   26-Feb-2017 13:11:10
```

Create Sequence of Dates

Create a sequence of consecutive dates beginning on March 18, 2014.

```
T = datetime([2014,03,18]) + caldays(0:4)
```

```
T = 1×5 datetime array
   18-Mar-2014   19-Mar-2014   20-Mar-2014   21-Mar-2014   22-Mar-2014
```

Create a sequence of dates beginning on March 18, 2014, spaced 2 days apart.

```
T = datetime([2014,03,18]) + caldays(0:2:8)
```

```
T = 1×5 datetime array
   18-Mar-2014   20-Mar-2014   22-Mar-2014   24-Mar-2014   26-Mar-2014
```

Input Arguments

X — Input array
numeric array | calendar duration array | logical array

Input array, specified as a numeric array, calendar duration array, or logical array. If `X` is a numeric array, it must contain only integer values. That is, you cannot create fractional calendar units.

Tips

- `caldays` creates days that account for Daylight Saving Time shifts when used in calendar calculations. To create exact fixed-length (24 hour) days, use the `days` function.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also
`calendarDuration` | `days` | `hours`

Introduced in R2014b

caldiff

Calendar math successive differences

Syntax

```
dt = caldiff(t)
dt = caldiff(t,components)
dt = caldiff(t,components,dim)
```

Description

`dt = caldiff(t)` calculates time differences between adjacent datetime values in `t` in terms of the calendar components years, months, days, and time. `caldiff` calculates differences along the first array dimension whose size does not equal 1.

- If `t` is a vector of length `m`, then `dt = caldiff(t)` returns a vector of length `m-1`. The elements of `dt` are the differences between adjacent elements of `t`.

  ```
  dt = [between(t(1),t(2)), between(t(2),t(3)),..., between(t(m-1),t(m))]
  ```

- If `t` is a nonvector `p`-by-`m` matrix, then `dt = caldiff(t)` returns a matrix of size `(p-1)`-by-`m`, whose elements are the differences between the rows of `t`.

  ```
  dt(:,I) = [between(t(1,I),t(2,I), between(t(2,I),t(3,I)), ...,
       between(t(p-1,I),t(p,I))]
  ```

`dt = caldiff(t,components)` finds the differences between successive datetimes in `t` in terms of the specified calendar or time components.

`dt = caldiff(t,components,dim)` finds the differences between successive datetimes along the dimension specified by `dim`.

Examples

Calendar Differences Between Datetime Values

Create a `datetime` array and then compute the differences between the values in terms of calendar components.

```
t = [datetime('yesterday');datetime('today');datetime('tomorrow')]
```

```
t = 3×1 datetime array
   23-Feb-2017
   24-Feb-2017
   25-Feb-2017
```

```
D = caldiff(t)
```

```
D = 2×1 calendarDuration array
   1d
   1d
```

Differences Using Specific Calendar Components

Create a `datetime` array and then compute the differences between the values in terms of days.

```
t = datetime('now') + calmonths(0:3)
```

```
t = 1×4 datetime array
   24-Feb-2017 12:53:23   24-Mar-2017 12:53:23   24-Apr-2017 12:53:23   24-May-2017 12
```

```
D = caldiff(t,'days')
```

```
D = 1×3 calendarDuration array
   28d   31d   30d
```

Computer the differences between the datetime values in terms of weeks and days.

```
D = caldiff(t,{'weeks','days'})
```

```
D = 1×3 calendarDuration array
      4w   4w 3d   4w 2d
```

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

`components` — Calendar or time components
`'years'` | `'quarters'` | `'months'` | `'weeks'` | `'days'` | `'time'` | cell array of character vectors

Calendar or time components, specified as one of the following character vectors, or a cell array containing one or more of these character vectors.

- `'years'`
- `'quarters'`
- `'months'`
- `'weeks'`
- `'days'`
- `'time'`

Except for `'time'`, the above components are flexible lengths of time. For example, one month represents a different length of time when added to a datetime in January than when added to a datetime in February.

`caldiff` operates on the calendar or time components in decreasing order, starting with the largest component.

In general, `t(2:m)` is not equal to `t(1:m-1) + dt`, unless you include `'time'` in `components`.

Example: `{'years','quarters'}`

Data Types: `char` | `cell`

`dim` — Dimension to operate along
positive integer

Dimension to operate along, specified as a positive integer. If no value is specified, the default is the first array dimension whose size does not equal 1.

Output Arguments

`dt` — Difference array
scalar | vector | matrix | multidimensional array

Difference array, returned as a scalar, vector, matrix, or multidimensional `calendarDuration` array.

Tips

- To compute successive differences between datetimes in `t1` and `t2` as exact, fixed-length units of hours, minutes, and seconds, use `diff(t)`.

See Also

See Also

`between` | `calendarDuration` | `diff` | `minus`

Introduced in R2014b

calendar

Calendar for specified month

Syntax

```
c = calendar
c = calendar(d)
c = calendar(y, m)
```

Description

`c = calendar` returns a 6-by-7 matrix containing a calendar for the current month. The calendar runs Sunday (first column) to Saturday.

`c = calendar(d)`, where `d` is a serial date number or text representing a date and time, returns a calendar for the specified month.

`c = calendar(y, m)`, where `y` and `m` are integers, returns a calendar for the specified month of the specified year.

If you do not specify an output argument, then `calendar` displays a calendar in the Command Window but does not return a value.

Examples

The command

```
calendar(1957,10)
```

reveals that the Space Age began on a Friday (on October 4, 1957, when Sputnik 1 was launched).

```
                    Oct 1957
     S     M    Tu     W    Th     F     S
     0     0     1     2     3     4     5
     6     7     8     9    10    11    12
```

```
    13    14    15    16    17    18    19
    20    21    22    23    24    25    26
    27    28    29    30    31     0     0
     0     0     0     0     0     0     0
```

See Also

`datenum`

Introduced before R2006a

calendarDuration

Create calendar duration array from numeric values

The `calendarDuration` function creates an array that represents elapsed time in calendar units of variable length. For example, the number of days in 1 month depend on the particular month of the year. Calculations with calendar durations account for daylight saving time changes and leap years.

Syntax

```
L = calendarDuration(Y,M,D)
L = calendarDuration(Y,M,D,H,MI,S)
L = calendarDuration(Y,M,D,T)

L = calendarDuration( ___ ,'Format',displayFormat)
```

Description

`L = calendarDuration(Y,M,D)` creates an array of calendar durations from numeric arrays containing the number of years, months, and days specified by `Y`, `M`, and `D`, respectively. Alternatively, you can specify the input arguments as a matrix with three columns, `[Y,M,D]`.

`L = calendarDuration(Y,M,D,H,MI,S)` also includes the hours, minutes, and seconds specified by `H`, `MI`, and `S`, respectively. Alternatively, you can specify the input arguments as a matrix with six columns, `[Y,M,D,H,MI,S]`.

`L = calendarDuration(Y,M,D,T)` creates an array of calendar durations from numeric arrays containing the number of years, months, and days, and a duration array `T` containing elapsed times.

`L = calendarDuration( ___ ,'Format',displayFormat)` additionally specifies the format in which `L` displays, using any of the input arguments from the previous syntaxes.

Examples

Create Calendar Duration from Numeric Scalars

```
L = calendarDuration(1,3,15)
```

```
L = calendarDuration
   1y 3mo 15d
```

Create Calendar Duration from Year, Month, Day, and Duration Arrays

Create a 2-by-2 array representing numbers of days.

```
D = magic(2)
```

```
D =

     1     3
     4     2
```

Create a 2-by-2 `duration` array of hours.

```
T = hours([1 2; 25 12])
```

```
T = 2×2 duration array
    1 hr    2 hr
   25 hr   12 hr
```

Create a `calendarDuration` array using scalar values for the year and month inputs.

```
L = calendarDuration(1,13,D,T)
```

```
L = 2×2 calendarDuration array
    2y 1mo 1d 1h 0m 0s    2y 1mo 3d 2h 0m 0s
   2y 1mo 4d 25h 0m 0s   2y 1mo 2d 12h 0m 0s
```

Month values greater than 12 carry over to years in the display. Hour values greater than 24 do not carry over to days in the display, because the number of hours in a calendar day is not necessarily 24 hours.

Specify Display Format of Calendar Duration

Create a `calendarDuration` array and specify a format that displays the values in terms of months, weeks, days, and time.

```
L = calendarDuration(1,1,5:9,12,0,0,'Format','mwdt')
```

```
L = 1×5 calendarDuration array
      13mo 5d 12h 0m 0s      13mo 6d 12h 0m 0s      13mo 1w 12h 0m 0s   13mo 1w 1d 12h
```

Input Arguments

`Y,M,D` — Year, month, and day values

scalar | vector | matrix | multidimensional array

Year, month, and day values, specified as scalars, vectors, matrices, or multidimensional arrays. These values must be the same size, or any can be a scalar. `Y,M,D` should contain only integer values.

If `Y,M,D` are all scalars or all column vectors, you can specify the input arguments as a matrix with three columns, `[Y,M,D]`.

Specifying month values greater than 12 is equivalent to a number of years plus a number of months. For example, 25 months are equal to 2 years and 1 month. However, day values are not equivalent to a number of months, because the number of days in a month is not fixed, and cannot be determined until you add the calendar duration to a specific datetime.

Example: `2,10,24`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Y,M,D,H,MI,S` — Year, month, day, hour, minute, and second values

scalar | vector | matrix | multidimensional array

Year, month, day, hour, minute and second values, specified as scalars, vectors, matrices, or multidimensional arrays. These values must be the same size, or any can be a scalar. Specify fractional seconds as part of the seconds input, `S`. The `Y,M,D,H,MI` inputs should contain only integer values.

If `Y,M,D,H,MI,S` are all scalars or all column vectors, you can specify the input arguments as a matrix with six columns, `[Y,M,D,H,MI,S]`.

Specifying month values greater than 12 is equivalent to a number of years plus a number of months. For example, 25 months are equal to 2 years and 1 month. Minute values greater than 60 carry over to a number of hours, and second values greater than 60 carry over to a number of minutes. However, day values are not equivalent to a number of months because the number of days in a month is not fixed and cannot be determined until you add the calendar duration to a specific datetime. Similarly, hour values are not equivalent to a number of calendar days.

Example: `2,10,24,12,45,07.451`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Y,M,D,T` — Year, month, day, and duration values
scalar | vector | matrix | multidimensional array

Year, month, day and duration values, specified as scalars, vectors, matrices, or multidimensional arrays. These values must be the same size, or any can be a scalar. `Y`, `M`, and `D` are numeric arrays, and `T` is a `duration` array containing elapsed times.

Specifying month values greater than 12 is equivalent to a number of years plus a number of months. For example, 25 months are equal to 2 years and 1 month. However, day values are not equivalent to a number of months and duration values are not equivalent to a number of days. The number of days in a month and the number of hours in a day are not fixed and cannot be determined until you add the calendar duration to a specific datetime.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`displayFormat` — Display format
`'ymdt'` (default) | character vector

Display format of the values in `L`, specified as a character vector that can include the characters `y`, `q`, `m`, `w`, `d`, and `t`, in this order. The character vector must include `m` to display the number of months, `d` to display the number of days, and `t` to display the number of hours, minutes, and seconds. The `y` (year), `q` (quarter), and `w` (week) characters are optional.

This table describes the date and time components that the characters represent.

Character	Date or Time Unit	Details
`y`	Years	Multiples of 12 months display as a number of years
`q`	Quarters	Multiples of 3 months display as a number of quarters
`m`	Months	Must be included in `displayFormat`
`w`	Weeks	Multiples of 7 days display as a number of weeks
`d`	Days	Must be included in `displayFormat`
`t`	Time (hours, minutes, and seconds)	Must be included in `displayFormat`

If the value of a date or time component is zero, it is not displayed.

Changing the display format of a `calendarDuration` array does not change the values in the array.

Example: `'yqmdt'`

Output Arguments

`L` — Calendar duration

`calendarDuration` array

Calendar duration, returned as a `calendarDuration` array.

You can change the display format of a calendar duration by modifying the `Format` property. For example, to display the calendar duration, `L`, as a number of months, type:

```
L.Format = 'm'
```

Tips

- When you add a `calendarDuration` array that contains more than one unit to a datetime, MATLAB always adds the larger units first. If `t` is a datetime, then this command:

```
t + calendarDuration(1,2,3)
```

is the same as:

```
t + calyears(1) + calmonths(2) + caldays(3)
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

See Also

See Also

`duration`

Topics

"Represent Dates and Times in MATLAB"

Introduced in R2014b

calllib

Call function in shared library

Syntax

```
[x1,...,xN] = calllib(libname,funcname,arg1,...,argN)
```

Description

`[x1,...,xN] = calllib(libname,funcname,arg1,...,argN)` calls function, `funcname`, in library, `libname`, passing input arguments, `arg1,...,argN`, and returns output values obtained from `funcname` in `x1,...,xN`.

Examples

Call `addStructByRef` Function

Load the library.

```
if ~libisloaded('shrlibsample')
   addpath(fullfile(matlabroot,'extern','examples','shrlib'))
   loadlibrary('shrlibsample')
end
```

Display function signature.

```
libfunctionsview shrlibsample
```

```
[double, c_structPtr] addStructByRef(c_structPtr)
```

The input argument is a pointer to a `c_struct` data type.

Create a MATLAB structure, `struct`:

```
struct.p1 = 4; struct.p2 = 7.3; struct.p3 = -290;
```

Call the function.

```
[res,st] = calllib('shrlibsample','addStructByRef',struct);
```

Display the results.

```
res
```

```
res =
         -279
```

Cleanup.

```
unloadlibrary shrlibsample
```

Input Arguments

`libname` — Name of shared library

character vector

Name of shared library, specified as a character vector. Do not include the path or file extension in `libname`.

If you call `loadlibrary` using the `alias` option, then you must use the alias name for the `libname` argument.

Data Types: `char`

`funcname` — Name of function in library

character vector

Name of function in library, specified as a character vector.

Data Types: `char`

`arg1,...,argN` — Input arguments

any type

Input arguments, 1 through N, required by `funcname` (if any), specified by any type. The `funcname` argument list specifies the argument type.

Output Arguments

`x1,...,xN` — Output arguments

any type

Output arguments, 1 through N, from `funcname` (if any), returned as any type. The `funcname` argument list specifies the argument type.

Limitations

- Use with libraries that are loaded using the `loadlibrary` function.

Tips

- MATLAB validates input argument types before calling `funcname`. If MATLAB displays error messages about data types, check the MATLAB function signature. For example, if `funcname` is in library `mylib` type:

  ```
  libfunctions('mylib','-full')
  ```

  Scroll through the output to find `funcname`. For more information, refer to your library documentation.

  When you call `funcname`, that function might display errors. For information about error messages, refer to your library documentation.

See Also

See Also

`libfunctionsview` | `loadlibrary`

Topics

Passing Arguments
"MATLAB Terminates Unexpectedly When Calling Function in Shared Library"
"No Matching Signature Error"

Introduced before R2006a

callSoapService

Send SOAP (Simple Object Access Protocol) message to endpoint

Compatibility

`callSoapService` will be removed in a future release. Use `matlab.wsdl.createWSDLClient` instead.

Syntax

```
response = callSoapService(endpoint,soapAction,message)
```

Description

`response = callSoapService(endpoint,soapAction,message)` sends `message` to the `soapAction` service at `endpoint`.

Examples

Retrieve Book Information from Library Database

This example assumes the library is on a local intranet and does not use an actual endpoint; therefore, you cannot run it.

Retrieve the name of the author of a book titled “In the Fall.” The relative path of the library service is `urn:LibraryCatalog`. To get the author's name, use the `getAuthor` function, which takes the book name as the input value. The `getAuthor` parameter is `nameToLookUp`. The XML data type for title is `{http://www.w3.org/2001/XMLSchema}string`. The SOAP message style is `rpc` by default.

Create the SOAP message.

```
message = createSoapMessage(...
```

```
  'urn:LibraryCatalog',...
  'getAuthor',...
  {'In the Fall'},...
  {'nameToLookUp'},...
  {'{http://www.w3.org/2001/XMLSchema}string'})
```

```
message =

[#document: null]
```

This response does not necessarily indicate that the message is valid, although certain input problems produce error messages.

Send the message to the server for processing, and get the author's name back. The server endpoint is `http://test/soap/services/LibraryCatalog`. The server method is `urn:LibraryCatalog#getAuthor`.

```
response = callSoapService(...
  'http://test/soap/services/LibraryCatalog',...
  'urn:LibraryCatalog#getAuthor',...
  message)
```

```
<?xml version="1.0" encoding="utf-8"?>
<soapenv:Envelope
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
<soapenv:Body>
<getAuthorResponse xmlns="urn:LibraryCatalog">
<ns1:getAuthorReturn xmlns:ns1="http://latestversion.soap.test">
Kate Alvin
</ns1:getAuthorReturn>
</getAuthorResponse>
</soapenv:Body>
</soapenv:Envelope>
```

MATLAB returns the message in a single line, displayed here on separate lines for legibility.

Extract the author's name.

```
author = parseSoapResponse(response)
```

```
author = Kate Alvin
```

MATLAB automatically converted the XML string data type to `char`.

Input Arguments

`endpoint` — URL identifying a built-in HTTP service

string

URL identifying a built-in HTTP service, specified as a string.

Example: `'http://test/soap/services/LibraryCatalog'`

`soapAction` — Name of service

string

Name of service, specified as a string.

Example: `'urn:LibraryCatalog#getAuthor'`

`message` — Java® document object model (DOM)

string

Java document object model (DOM), specified as a string. Use `createSoapMessage` to create `message`.

Output Arguments

`response` — Result of `soapAction`

string

Result of `soapAction`, returned as a string. To read information in `response`, use the `parseSoapResponse` function.

See Also

See Also

`createSoapMessage` | `matlab.wsdl.createWSDLClient` | `parseSoapResponse` | `urlread` | `xmlread`

Introduced before R2006a

calmonths

Calendar duration in months

Syntax

```
M = calmonths(X)
```

Description

`M = calmonths(X)` returns an array representing calendar months equivalent to the values in `X`.

- If `X` is a numeric array, then `M` is a `calendarDuration` array with each element equal to the number of calendar months in the corresponding element of `X`.
- If `X` is a `calendarDuration` array, then `M` is a `double` array with each element equal to the number of whole calendar months in the corresponding element of `X`.

Examples

Create Array of Calendar Months

```
X = magic(4);
M = calmonths(X)
```

```
M = 4×4 calendarDuration array
   1y 4mo      2mo      3mo   1y 1mo
      5mo     11mo     10mo      8mo
      9mo      7mo      6mo       1y
      4mo   1y 2mo   1y 3mo      1mo
```

Convert Calendar Durations to Calendar Months

Create an array of calendar durations. Then, convert each value to the equivalent number of whole calendar months.

```
X = calmonths(15:17) + caldays(8) + hours(1.2345)
```

```
X = 1×3 calendarDuration array
   1y 3mo 8d 1h 14m 4.2s   1y 4mo 8d 1h 14m 4.2s   1y 5mo 8d 1h 14m 4.2s
```

```
M = calmonths(X)
```

```
M =

    15    16    17
```

Input Arguments

X — Input array

numeric array | calendar duration array | logical array

Input array, specified as a numeric array, calendar duration array, or logical array. If X is a numeric array, it must contain only integer values. That is, you cannot create fractional calendar units.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

calendarDuration | calweeks

Introduced in R2014b

calquarters

Calendar duration in quarters

Syntax

```
Q = calquarters(X)
```

Description

`Q = calquarters(X)` returns an array representing calendar quarters equivalent to the values in array `X`.

- If `X` is a numeric array, then `Q` is a `calendarDuration` array with each element equal to the number of calendar quarters in the corresponding element of `X`.
- If `X` is a `calendarDuration` array, then `Q` is a `double` array with each element equal to the number of whole calendar quarters in the corresponding element of `X`.

  ```
  Q = fix(calmonths(t)/3)
  ```

Examples

Create Array of Calendar Quarters

```
X = magic(4);
Q = calquarters(X)
```

```
Q = 4×4 calendarDuration array
   16q    2q    3q   13q
    5q   11q   10q    8q
    9q    7q    6q   12q
    4q   14q   15q    1q
```

Convert Calendar Durations to Quarters

Create an array of calendar durations. Then, convert each value to the equivalent number of whole calendar quarters.

```
X = calmonths(2:2:6) + caldays(8)
```

```
X = 1×3 calendarDuration array
   2mo 8d   4mo 8d   6mo 8d
```

```
Q = calquarters(X)
```

```
Q =

     0     1     2
```

Input Arguments

X — Input array

numeric array | calendar duration array | logical array

Input array, specified as a numeric array, calendar duration array, or logical array. If `X` is a numeric array, it must contain only integer values. That is, you cannot create fractional calendar units.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`calendarDuration` | `calmonths`

Introduced in R2014b

calweeks

Calendar duration in weeks

Syntax

```
W = calweeks(X)
```

Description

`W = calweeks(X)` returns an array representing calendar weeks equivalent to the values in `X`.

- If `X` is a numeric array, then `W` is a `calendarDuration` array with each element equal to the number of calendar weeks in the corresponding element of `X`.
- If `X` is a `calendarDuration` array, then `calweeks` returns the number of whole weeks equivalent to each calendar duration in `X`.

Examples

Create Array of Calendar Weeks

```
X = magic(4);
W = calweeks(X)
```

```
W = 4×4 calendarDuration array
   16w    2w    3w   13w
    5w   11w   10w    8w
    9w    7w    6w   12w
    4w   14w   15w    1w
```

Convert Calendar Durations to Calendar Weeks

Create an array of calendar durations. Then, convert each value to the equivalent number of whole calendar weeks.

```
X = caldays(15:17) + hours(1.2345)
```

```
X = 1×3 calendarDuration array
   15d 1h 14m 4.2s   16d 1h 14m 4.2s   17d 1h 14m 4.2s
```

```
W = calweeks(X)
```

```
W =

     2     2     2
```

Input Arguments

X — Input array

numeric array | calendar duration array | logical array

Input array, specified as a numeric array, calendar duration array, or logical array. If X is a numeric array, it must contain only integer values. That is, you cannot create fractional calendar units.

Output Arguments

W — Calendar weeks

scalar | vector | matrix | multidimensional array

Calendar weeks, returned as a scalar, vector, matrix, or multidimensional array. W is the same size as X. The data type of W depends on X.

- If X is a numeric array, then W is an array of calendar durations in units of equivalent flexible-length calendar weeks.
- If X is a `calendarDuration` array, then W is a `double` array of integer values representing whole calendar weeks.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`caldays` | `calendarDuration`

Introduced in R2014b

calyears

Calendar duration in years

Syntax

```
Y = calyears(X)
```

Description

`Y = calyears(X)` returns an array representing calendar years equivalent to the values in `X`. Calendar years account for leap days when used in calendar calculations.

- If `X` is a numeric array, then `Y` is a `calendarDuration` array with each element equal to the number of calendar years in the corresponding element of `X`.
- If `X` is a `calendarDuration` array, then `calyears` returns the number of whole years equivalent to each calendar duration in `X`.

Examples

Create Array of Calendar Years

```
X = magic(4);
Y = calyears(X)
```

```
Y = 4×4 calendarDuration array
   16y    2y    3y   13y
    5y   11y   10y    8y
    9y    7y    6y   12y
    4y   14y   15y    1y
```

Convert Calendar Durations to Calendar Years

Create an array of calendar durations. Then, convert each value to the equivalent number of whole calendar years.

```
X = calmonths(21:25) + caldays(8)
```

```
X = 1×5 calendarDuration array
    1y 9mo 8d   1y 10mo 8d   1y 11mo 8d        2y 8d    2y 1mo 8d
```

```
Y = calyears(X)
```

```
Y =

     1     1     1     2     2
```

Input Arguments

X — Input array

numeric array | calendar duration array | logical array

Input array, specified as a numeric array, calendar duration array, or logical array. If `X` is a numeric array, it must contain only integer values. That is, you cannot create fractional calendar units.

Output Arguments

Y — Calendar years

scalar | vector | matrix | multidimensional array

Calendar years, returned as a scalar, vector, matrix, or multidimensional array. `Y` is the same size as `X`. The data type of `Y` depends on `X`.

- If `X` is a numeric array, then `Y` is an array of calendar durations in units of equivalent flexible-length calendar years.
- If `X` is a `calendarDuration` array, then `Y` is a `double` array of integer values representing whole calendar years.

Tips

- `calyears` creates years that account for leap days when used in calendar calculations. To create exact fixed-length (365.2425 day) years, use the `years` function.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`calendarDuration` | `calmonths` | `years`

Introduced in R2014b

camdolly

Move camera position and target

Syntax

```
camdolly(dx,dy,dz)
camdolly(dx,dy,dz,'targetmode')
camdolly(dx,dy,dz,targetmode,coordsys)
camdolly(ax,...)
```

Description

`camdolly(dx,dy,dz)` moves the camera position and the camera target by the specified amounts `dx`, `dy`, and `dz`.

`camdolly(dx,dy,dz,'targetmode')` uses the `targetmode` argument to determine how the camera moves:

- `'movetarget'` (default) — Move both the camera and the target.
- `'fixtarget'` — Move only the camera.

`camdolly(dx,dy,dz,targetmode,coordsys)` uses the `coordsys` argument to determine how MATLAB interprets `dx`, `dy`, and `dz`:

- `'camera'` (default) — Move in the coordinate system of the camera. `dx` moves left/right, `dy` moves down/up, and `dz` moves along the viewing axis. MATLAB normalizes the units to the scene.

  For example, setting `dx` to 1 moves the camera to the right, which pushes the scene to the left edge of the box formed by the axes position rectangle. A negative value moves the scene in the other direction. Setting `dz` to 0.5 moves the camera to a position halfway between the camera position and the camera target.
- `'pixels'` — Interpret `dx` and `dy` as pixel offsets. This option ignores `dz`.
- `'data'` — Interpret `dx`, `dy`, and `dz` as offsets in axes data coordinates.

`camdolly(ax,...)` operates on the axes identified by the first argument, `ax`. When you do not specify an axes object, `camdolly` operates on the current axes.

`camdolly` sets the axes CameraPosition and CameraTarget properties, which in turn sets the CameraPositionMode and CameraTargetMode properties to `manual`.

Examples

Move Camera Position and Target

Move the camera along the *x*-axis and *y*-axis in a series of steps.

```
surf(peaks)
axis vis3d
t = 0:pi/20:4*pi;
dx = sin(t)./40;
dy = cos(t)./40;
for i = 1:length(t)
    camdolly(dx(i),dy(i),0)
    drawnow
end
```

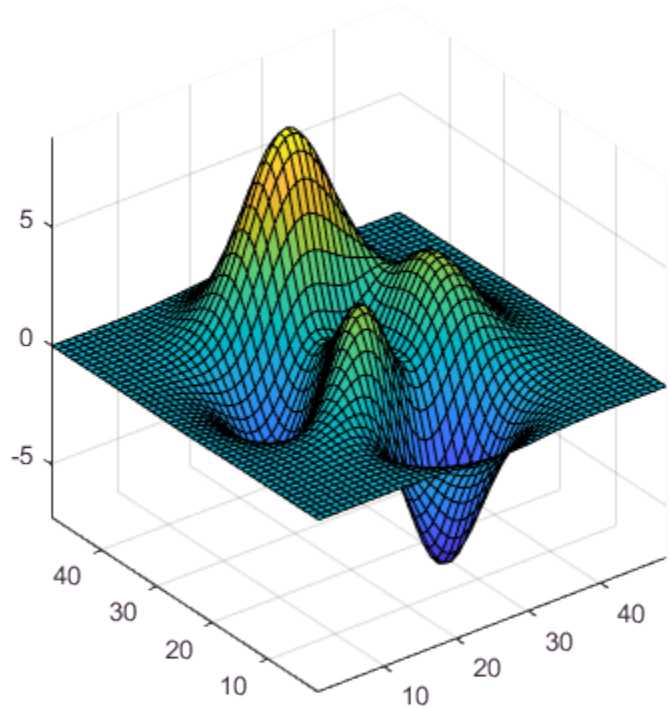

See Also

axes | campos | camproj | camup | camva | camtarget

Topics

"Camera Graphics Terminology"

Introduced before R2006a

cameratoolbar

Control camera toolbar programmatically

Syntax

```
cameratoolbar
cameratoolbar('NoReset')
cameratoolbar('SetMode',mode)
cameratoolbar('SetCoordSys',coordsys)
cameratoolbar('Show')
cameratoolbar('Hide')
cameratoolbar('Toggle')
cameratoolbar('ResetCameraAndSceneLight')
cameratoolbar('ResetCamera')
cameratoolbar('ResetSceneLight')
cameratoolbar('ResetTarget')
h = cameratoolbar(...)
mode = cameratoolbar('GetMode')
paxis = cameratoolbar('GetCoordsys')
tf = cameratoolbar('GetVisible')
cameratoolbar('Close')
cameratoolbar(fig,...)
```

Description

`cameratoolbar` creates a toolbar that enables interactive manipulation of the axes camera and light when you drag the mouse on the figure window. Several axes camera properties are set when the toolbar is initialized.

`cameratoolbar('NoReset')` creates the toolbar without setting any camera properties.

`cameratoolbar('SetMode',mode)` sets the toolbar mode (depressed button). `mode` can be `'orbit'`, `'orbitscenelight'`, `'pan'`, `'dollyhv'`, `'dollyfb'`, `'zoom'`, `'roll'`, `'nomode'`. For descriptions of the various modes, see “Camera Toolbar”. You can also set these modes using the toolbar, by clicking the respective buttons.

`cameratoolbar('SetCoordSys',coordsys)` sets the principal axis of the camera motion. `coordsys` can be: `'x'`, `'y'`, `'z'`, `'none'`.

`cameratoolbar('Show')` shows the toolbar on the current figure.

`cameratoolbar('Hide')` hides the toolbar on the current figure.

`cameratoolbar('Toggle')` toggles the visibility of the toolbar.

`cameratoolbar('ResetCameraAndSceneLight')` resets the current camera and scenelight.

`cameratoolbar('ResetCamera')` resets the current camera.

`cameratoolbar('ResetSceneLight')` resets the current scenelight.

`cameratoolbar('ResetTarget')` resets the current camera target.

`h = cameratoolbar(...)` returns the handle to the toolbar.

`mode = cameratoolbar('GetMode')` returns the current mode.

`paxis = cameratoolbar('GetCoordsys')` returns the current principal axis.

`tf = cameratoolbar('GetVisible')` returns the visibility of the toolbar (`1` if visible, `0` if not visible).

`cameratoolbar('Close')` removes the toolbar from the current figure.

`cameratoolbar(fig,...)` specifies the figure to operate on by passing the figure handle as the first argument.

In general, the use of OpenGL hardware improves rendering performance.

Alternatives

Display the toolbar by selecting **Camera Toolbar** from the figure window's **View** menu.

See Also

`rotate3d` | `zoom`

Topics

"Camera Toolbar"

Introduced before R2006a

camlight

Create or move light object in camera coordinates

Syntax

```
camlight('headlight')
camlight('right')
camlight('left')
camlight
camlight(az,el)
camlight(...,'style')
camlight(lgt,...)
lgt = camlight(...)
```

Description

`camlight('headlight')` creates a light at the camera position.

`camlight('right')` creates a light right and up from camera.

`camlight('left')` creates a light left and up from camera.

`camlight` with no arguments is the same as `camlight('right')`.

`camlight(az,el)` creates a light at the specified azimuth (`az`) and elevation (`el`) with respect to the camera position. The camera target is the center of rotation and `az` and `el` are in degrees.

`camlight(...,'style')` defines the style argument using one of two values:

- `local` (default) — The light is a point source that radiates from the location in all directions.
- `infinite` — The light shines in parallel rays.

`camlight(lgt,...)` uses the light specified in `lgt`.

`lgt = camlight(...)` returns the light object.

`camlight` sets the light object Position and Style properties. A light created with `camlight` does not track the camera. In order for the light to stay in a constant position relative to the camera, call `camlight` whenever you move the camera.

Examples

Move Light Object

Create a light positioned to the left of the camera and then reposition the light each time the camera moves.

```
surf(peaks)
axis vis3d
h = camlight('left');
for i = 1:20
   camorbit(10,0)
   camlight(h,'left')
   pause(.1)
end
```

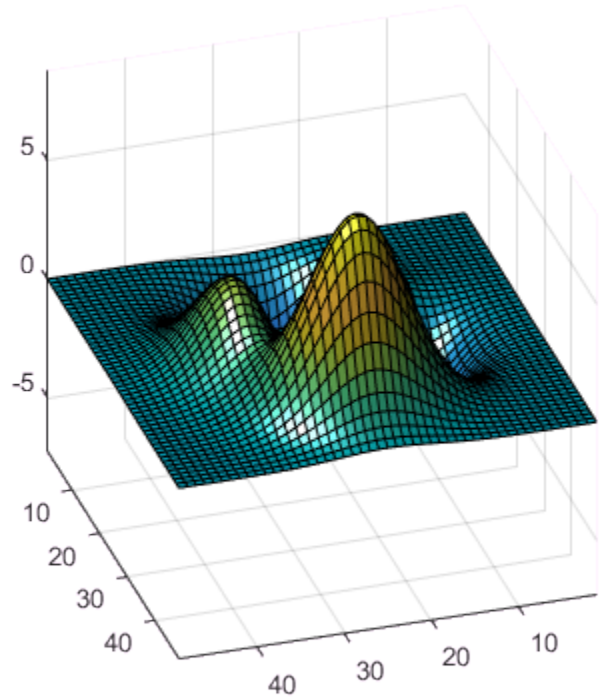

See Also

`lightangle` | `light`

Topics

"Lighting Overview"

Introduced before R2006a

camlookat

Position camera to view object or group of objects

Syntax

```
camlookat(object_handles)
camlookat(axes_handle)
camlookat
```

Description

`camlookat(object_handles)` views the objects identified in the vector `object_handles`. The vector can contain the handles of axes Children.

`camlookat(axes_handle)` views the objects that are children of the axes identified by `axes_handle`.

`camlookat` views the objects that are in the current axes by moving the camera position and camera target while preserving the relative view direction and camera view angle. The viewed object (or objects) roughly fill the axes position rectangle. To change the view, `camlookat` sets the axes CameraPosition and CameraTarget properties.

Examples

Position Camera to View Object

Create three spheres. Then set the data aspect ratio, the view, and the projection type.

```
[x,y,z] = sphere;
s1 = surf(x,y,z);
hold on
s2 = surf(x+3,y,z+3);
s3 = surf(x,y,z+6);
```

```
daspect([1 1 1])
view(30,10)
camproj perspective
```

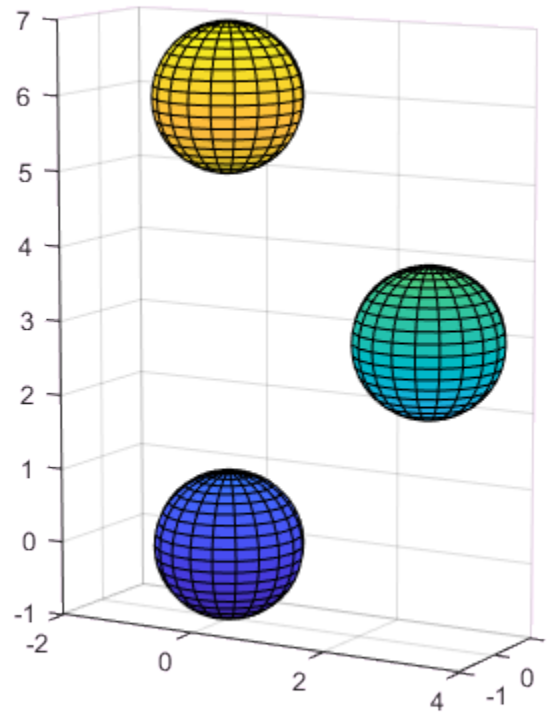

Compose the scene around sphere `s1`.

```
camlookat(s1)
```

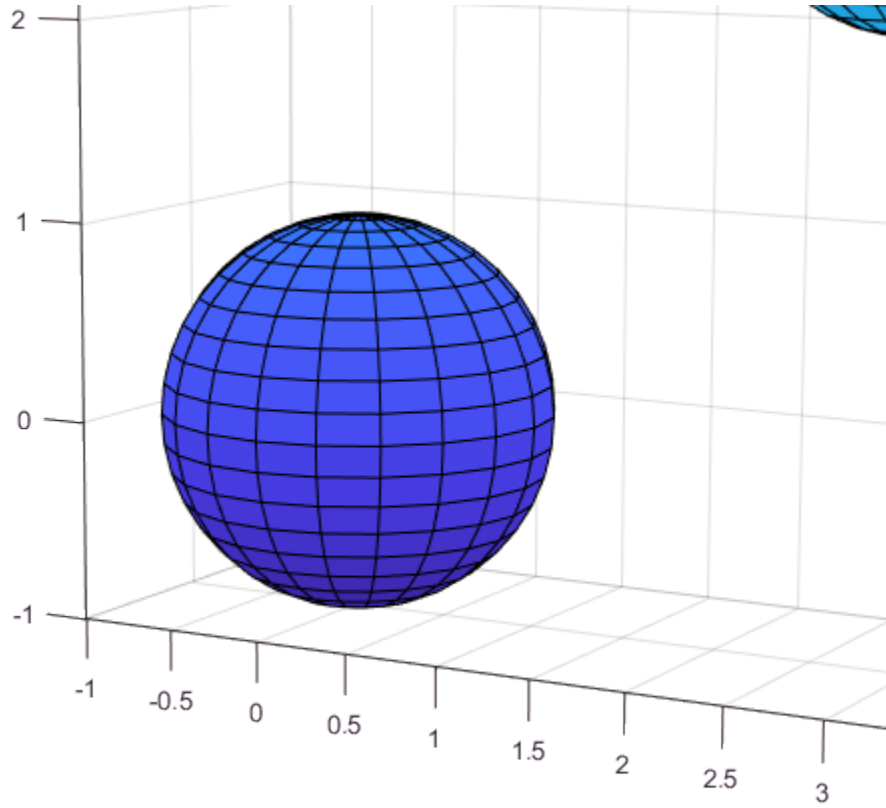

Compose the scene around sphere `s2`.

```
camlookat(s2)
```

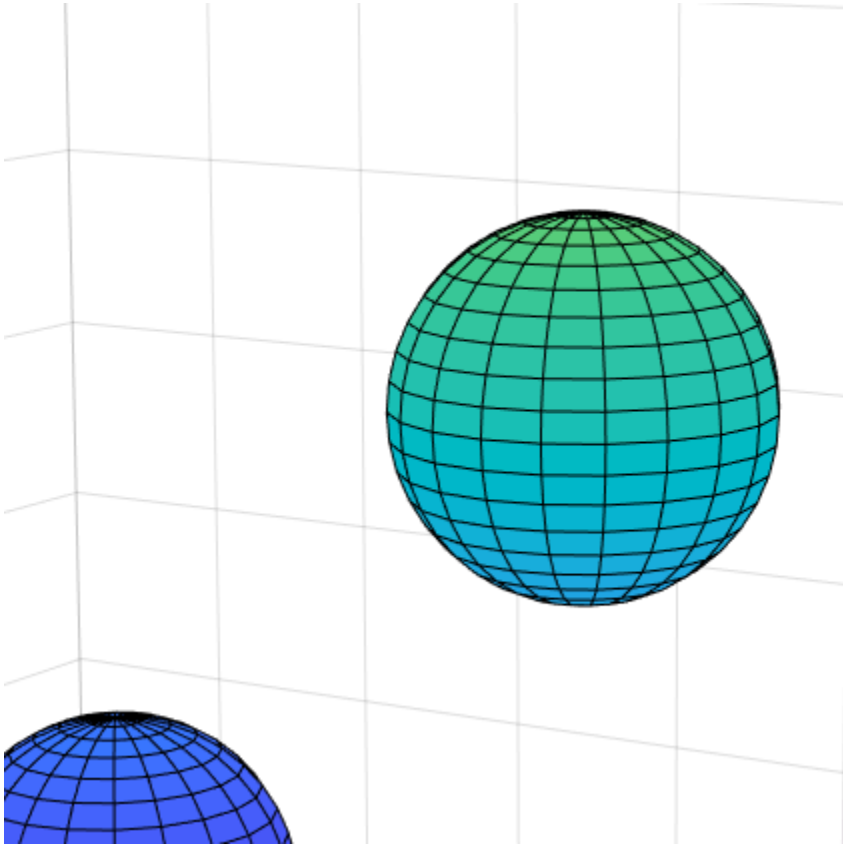

Compose the scene around sphere `s3`.

```
camlookat(s3)
```

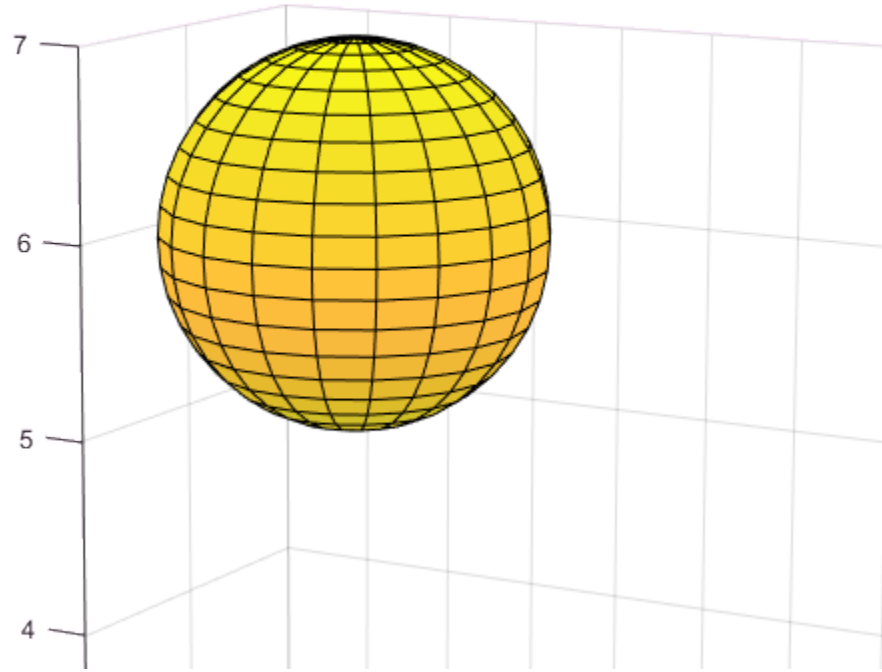

See Also

`campos` | `camtarget`

Topics

"Camera Graphics Terminology"

Introduced before R2006a

camorbit

Rotate camera position around camera target

Syntax

```
camorbit(dtheta,dphi)
camorbit(dtheta,dphi,'coordsys')
camorbit(dtheta,dphi,'coordsys','direction')
camorbit(axes_handle,...)
```

Description

`camorbit(dtheta,dphi)` rotates the camera position around the camera target by the amounts specified in `dtheta` and `dphi` (both in degrees). `dtheta` is the horizontal rotation and `dphi` is the vertical rotation.

`camorbit(dtheta,dphi,'coordsys')` rotates the camera position around the camera target, using the *`coordsys`* argument to determine the center of rotation. *`coordsys`* can take on two values:

- `data` (default) — Rotate the camera around an axis defined by the camera target and the `direction` (default is the positive *z* direction).
- `camera` — Rotate the camera about the point defined by the camera target.

`camorbit(dtheta,dphi,'coordsys','direction')` defines the axis of rotation for the data coordinate system using the `direction` argument in conjunction with the camera target. Specify `direction` as a three-element vector containing the *x*-, *y*-, and *z*-components of the direction or one of the characters, `x`, `y`, or `z`, to indicate `[1 0 0]`, `[0 1 0]`, or `[0 0 1]` respectively.

`camorbit(axes_handle,...)` operates on the axes identified by the first argument, `axes_handle`. When you do not specify an axes handle, `camorbit` operates on the current axes.

The behavior of `camorbit` differs from the `rotate3d` function in that while the `rotate3d` tool modifies the `View` property of the axes, the `camorbit` function fixes the

aspect ratio and modifies the CameraTarget, CameraPosition, and CameraUpVector properties of the axes. See Axes Properties for more information on all axes properties.

Examples

Rotate Camera Horizontally

Rotate the camera horizontally about a line defined by the camera target point and a direction that is parallel to the *y*-axis. Visualize this rotation as a cone formed with the camera target at the apex and the camera position forming the base.

```
surf(peaks)
axis vis3d

for i = 1:36
   camorbit(10,0,'data',[0 1 0])
   drawnow
end
```

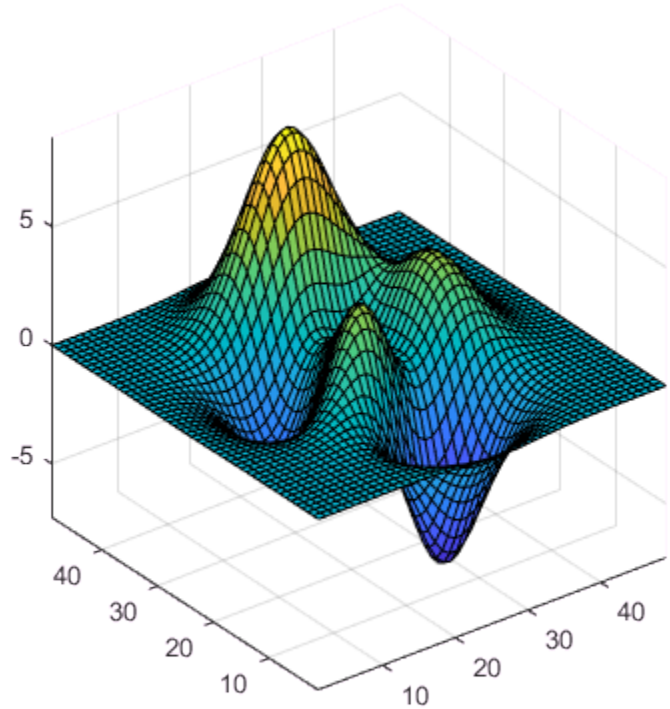

Rotate Camera Along Circle Around Axes

Rotate in the camera coordinate system to orbit the camera around the axes along a circle while keeping the center of a circle at the camera target.

```
surf(peaks)
axis vis3d

for i=1:36
   camorbit(10,0,'camera')
   drawnow
end
```

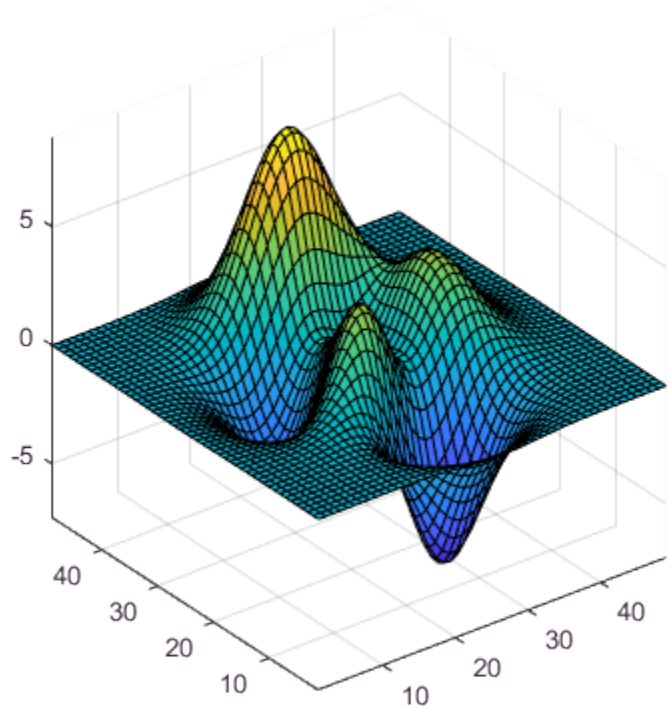

Alternatives

Enable 3-D rotation from the figure **Tools** menu or the figure toolbar.

See Also

`axes` | `axis` | `camdolly` | `campan` | `camzoom` | `camroll`

Topics

"Camera Graphics Terminology"

Introduced before R2006a

campan

Rotate camera target around camera position

Syntax

```
campan(dtheta,dphi)
campan(dtheta,dphi,coordsys)
campan(dtheta,dphi,coordsys,direction)
campan(ax,...)
```

Description

`campan(dtheta,dphi)` rotates the camera target of the current axes around the camera position by the amounts specified in `dtheta` and `dphi` (both in degrees). `dtheta` is the horizontal rotation and `dphi` is the vertical rotation.

`campan(dtheta,dphi,coordsys)` determine the center of rotation using the `coordsys` argument. It can take on two values:

- `'data'` (default) — Rotate the camera target around an axis defined by the camera position and the `direction` (default is the positive *z* direction)
- `'camera'` — Rotate the camera about the point defined by the camera target.

`campan(dtheta,dphi,coordsys,direction)` defines the axis of rotation for the data coordinate system using the `direction` argument with the camera position. Specify `direction` as a three-element vector containing the *x*-, *y*-, and *z*-components of the direction or one of the characters, `'x'`, `'y'`, or `'z'`, to indicate `[1 0 0]`, `[0 1 0]`, or `[0 0 1]` respectively.

`campan(ax,...)` operates on the axes identified by the first argument, `ax`. When you do not specify an axes object, `campan` operates on the current axes.

Examples

Rotate Camera Target

Move the camera target to pan the object in a circular motion.

```
sphere;
axis vis3d
hPan = sin(-pi:1:pi);
vPan = cos(-pi:1:pi);
for k = 1:length(hPan)
   campan(hPan(k),vPan(k))
   pause(.1)
end
```

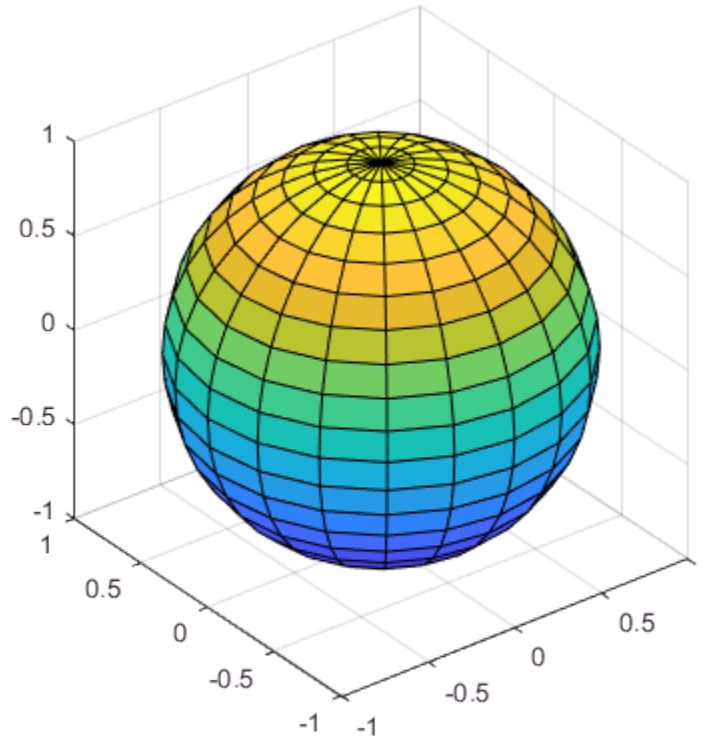

See Also

axes | camdolly | camorbit | camtarget | camzoom | camroll

Topics

"Camera Graphics Terminology"

Introduced before R2006a

campos

Set or query camera position

Syntax

```
campos
campos([camera_position])
campos('mode')
campos('auto')
campos('manual')
campos(ax,...)
```

Description

`campos` returns the camera position in the current axes.

`campos([camera_position])` sets the position of the camera in the current axes to the specified value. Specify the position as a three-element vector containing the *x*-, *y*-, and *z*-coordinates of the desired location in the data units of the axes.

`campos('mode')` returns the value of the camera position mode, which can be either `auto` (the default) or `manual`.

`campos('auto')` sets the camera position mode to `auto`.

`campos('manual')` sets the camera position mode to `manual`.

`campos(ax,...)` performs the set or query on the axes identified by the first argument, `ax`. When you do not specify an axes object, `campos` operates on the current axes.

`campos` sets or queries values of the axes CameraPosition and CameraPositionMode properties. The camera position is the point in the Cartesian coordinate system of the axes from which you view the scene.

Examples

Move Camera Position

Move the camera along the x-axis in a series of steps.

```
surf(peaks)
axis vis3d off
for x = -200:5:200
    campos([x,5,10])
    drawnow
end
```

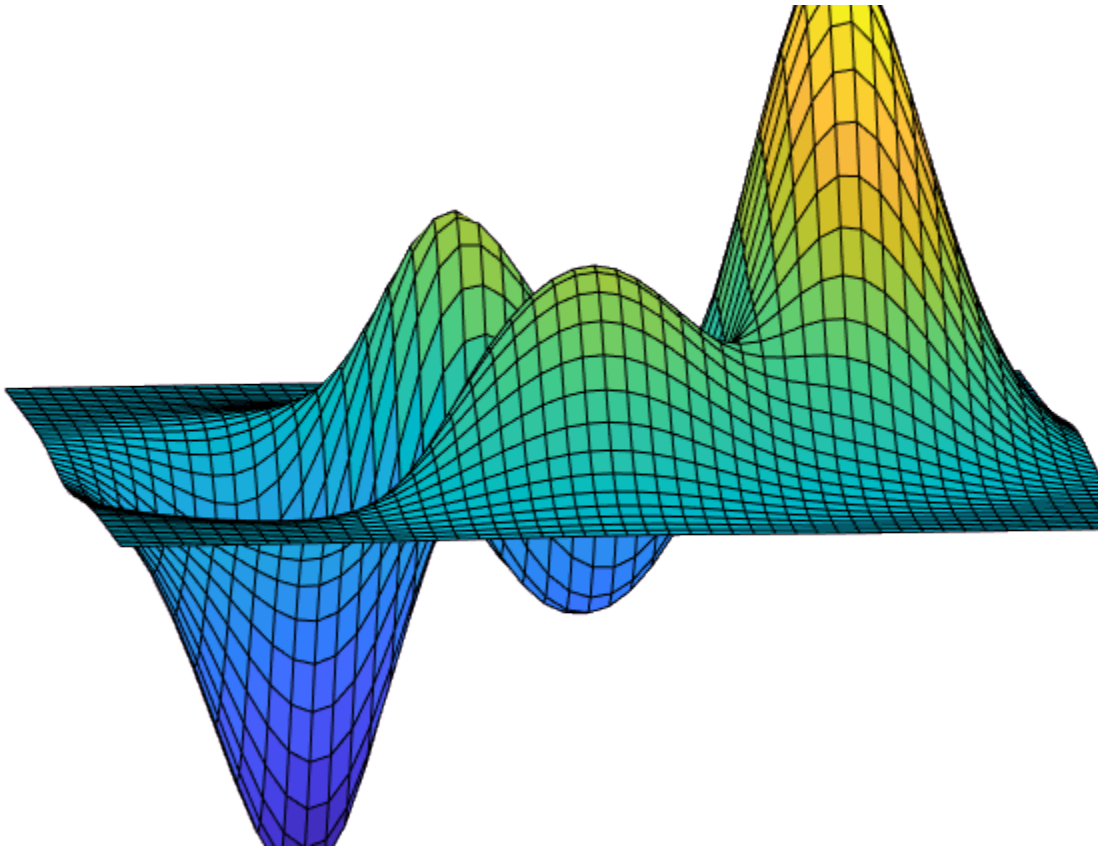

See Also

`axis` | `camproj` | `camup` | `camva` | `camtarget`

Topics

"Camera Graphics Terminology"

Introduced before R2006a

camproj

Set or query projection type

Syntax

```
camproj
camproj('projection_type')
camproj(axes_handle,...)
```

Description

`camproj` returns the projection type setting in the current axes. The projection type determines whether MATLAB 3-D views use a perspective or orthographic projection.

`camproj('projection_type')` sets the projection type in the current axes to the specified value. Possible values for *`projection_type`* are `orthographic` and `perspective`.

`camproj(axes_handle,...)` performs the set or query on the axes identified by the first argument, `axes_handle`. When you do not specify an axes handle, `camproj` operates on the current axes.

`camproj` sets or queries values of the axes object Projection property.

Examples

Set Projection Type

Plot two surfaces and compare the different projection settings.

```
subplot(1,2,1)
surf(membrane)
camproj('perspective')

subplot(1,2,2)
surf(membrane)
```

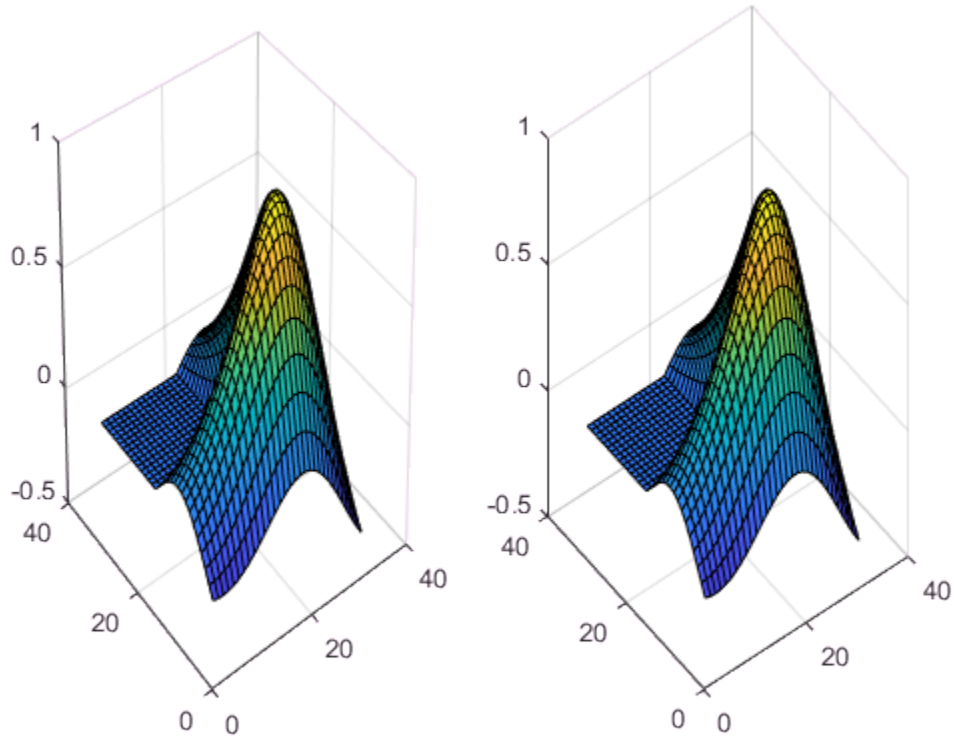


```
camproj('orthographic')
```

See Also

axis | campos | camtarget | camup | camva

Topics

"Camera Graphics Terminology"

Introduced before R2006a

camroll

Rotate camera about view axis

Syntax

```
camroll(dtheta)
camroll(ax,dtheta)
```

Description

`camroll(dtheta)` rotates the camera around the camera viewing axis by the amounts specified in `dtheta` (in degrees). The viewing axis is the line passing through the camera position and the camera target.

`camroll(ax,dtheta)` operates on the axes identified by the first argument, `ax`. When you do not specify an axes object, `camroll` operates on the current axes.

`camroll` sets the axes CameraUpVector property and also sets the CameraUpVectorMode property to `manual`.

Examples

Rotate Camera About View Axis

Rotate the camera around the viewing axis.

```
surf(peaks)
axis vis3d
for i = 1:36
 camroll(10)
 drawnow
end
```

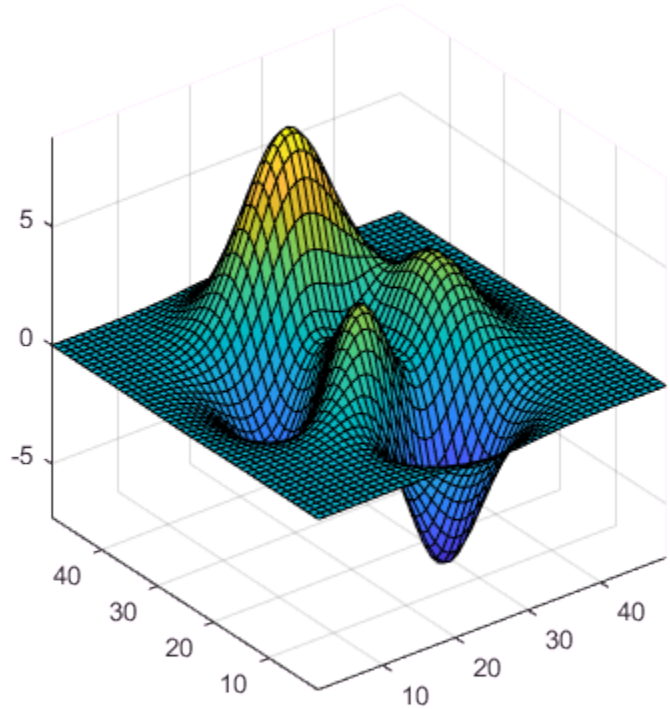

See Also

`axes` | `axis` | `camdolly` | `camorbit` | `camzoom` | `campan`

Topics

"Camera Graphics Terminology"

Introduced before R2006a

camtarget

Set or query location of camera target

Syntax

```
camtarget
camtarget([camera_target])
camtarget('mode')
camtarget('auto')
camtarget('manual')
camtarget(axes_handle,...)
```

Description

`camtarget` returns the location of the camera target in the current axes. The camera target is the location in the axes that the camera points to. The camera remains oriented toward this point regardless of its position.

`camtarget([camera_target])` sets the camera target in the current axes to the specified value. Specify the target as a three-element vector containing the *x*-, *y*-, and *z*-coordinates of the desired location in the data units of the axes.

`camtarget('mode')` returns the value of the camera target mode, which can be either `auto` (default) or `manual`.

`camtarget('auto')` sets the camera target mode to `auto`. When the camera target mode is `auto`, the camera target is the center of the axes plot box.

`camtarget('manual')` sets the camera target mode to `manual`.

`camtarget(axes_handle,...)` performs the set or query on the axes identified by `axes_handle`. When you do not specify an axes handle, `camtarget` operates on the current axes.

`camtarget` sets or queries values of the axes object CameraTarget and CameraTargetMode properties.

Examples

Move Camera Target

Move the camera position and the camera target along the x-axis in a series of steps.

```
surf(peaks);
axis vis3d
xp = linspace(-150,40,50);
xt = linspace(25,50,50);
for i = 1:50
     campos([xp(i),25,5]);
     camtarget([xt(i),30,0])
     drawnow
end
```

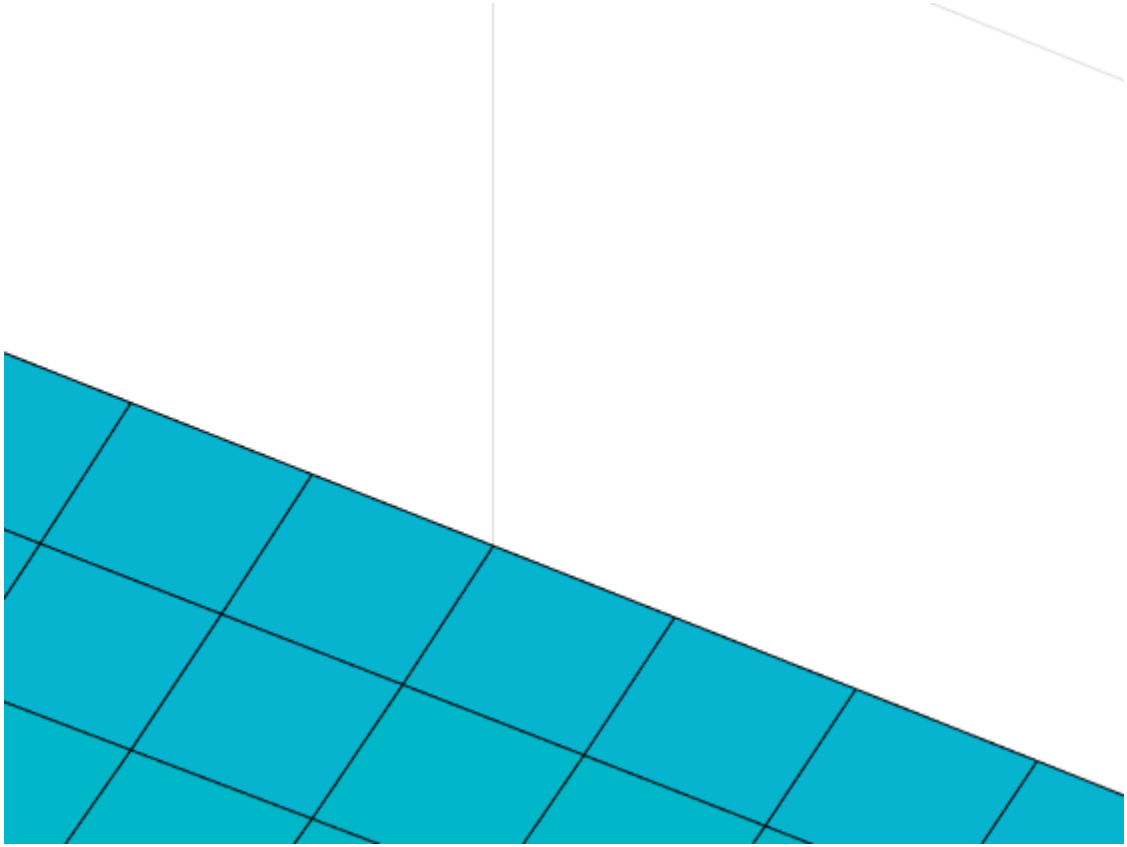

See Also

`axis` | `campos` | `camup` | `camva`

Topics

"Camera Graphics Terminology"

Introduced before R2006a

camup

Set or query camera up vector

Syntax

```
camup
camup([up_vector])
camup('mode')
camup('auto')
camup('manual')
camup(axes_handle,...)
```

Description

`camup` returns the camera up vector setting in the current axes. The camera up vector specifies the direction that is oriented up in the scene.

`camup([up_vector])` sets the up vector in the current axes to the specified value. Specify the up vector as *x*, *y*, and *z* components.

`camup('mode')` returns the current value of the camera up vector mode, which can be either `auto` (default) or `manual`.

`camup('auto')` sets the camera up vector mode to `auto`. In `auto` mode, `[0 1 0]` is the up vector of for 2-D views. This means the *y*-axis points up. For 3-D views, the up vector is `[0 0 1]`, meaning the *z*-axis points up.

`camup('manual')` sets the camera up vector mode to `manual`. In `manual` mode, the value of the camera up vector does not change unless you set it.

`camup(axes_handle,...)` performs the set or query on the axes identified by the first argument, `axes_handle`. When you do not specify an axes handle, `camup` operates on the current axes.

Examples

Set Camera Up Vector

Set the x-axis to be the up axis.

```
surf(peaks)
camup([1 0 0]);
```

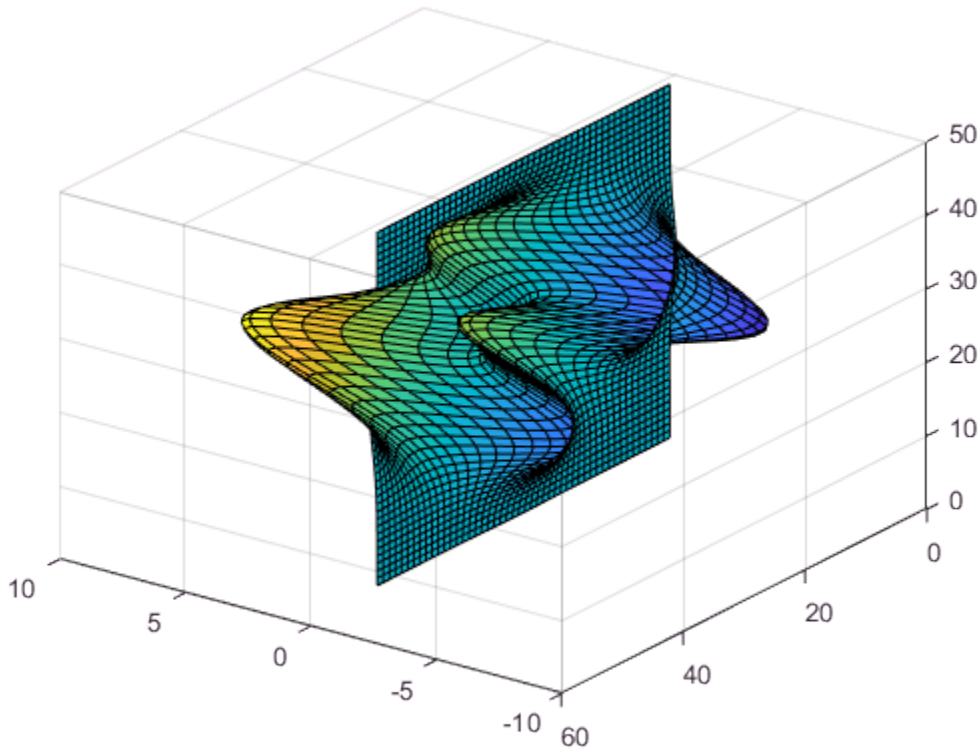

See Also

`axis` | `campos` | `camup` | `camtarget`

Topics

"Camera Graphics Terminology"

Introduced before R2006a

camva

Set or query camera view angle

Syntax

```
camva
camva(view_angle)
camva('mode')
camva('auto')
camva('manual')
camva(axes_handle,...)
```

Description

`camva` returns the camera view angle setting in the current axes. The camera view angle determines the field of view of the camera. Larger angles produce a smaller view of the scene. Implement zooming by changing the camera view angle.

`camva(view_angle)` sets the view angle in the current axes to the specified value. Specify the view angle in degrees.

`camva('mode')` returns the current value of the camera view angle mode, which can be either `auto` (the default) or `manual`.

`camva('auto')` sets the camera view angle mode to `auto`.

`camva('manual')` sets the camera view angle mode to `manual`.

`camva(axes_handle,...)` performs the set or query on the axes identified by the first argument, `axes_handle`. When you do not specify an axes handle, `camva` operates on the current axes.

Tips

The `camva` function sets or queries values of the axes object CameraViewAngle and CameraViewAngleMode properties.

When the camera view angle mode is `auto`, the camera view angle adjusts so that the scene fills the available space in the window. If you move the camera to a different position, the camera view angle changes to maintain a view of the scene that fills the available area in the window.

Setting a camera view angle or setting the camera view angle to `manual` disables the MATLAB stretch-to-fill feature (stretching of the axes to fit the window). This means setting the camera view angle to its current value,

```
camva(camva)
```

can cause a change in the way the graph looks. See `axes` for more information.

Examples

Set Camera View Angle

Create two push buttons, one that zooms in and another that zooms out. Set the range checking in the callback statements to keep the values for the camera view angle in the range greater than zero and less than 180. Then create a surface plot to zoom in and out on.

```
uicontrol('Style','pushbutton',...
  'String','Zoom In',...
  'Position',[20 20 60 20],...
  'Callback','if camva <= 1; return; else; camva(camva-1); end');

uicontrol('Style','pushbutton',...
  'String','Zoom Out',...
  'Position',[100 20 60 20],...
  'Callback',...
  'if camva >= 179; return; else; camva(camva+1); end');

surf(peaks);
```

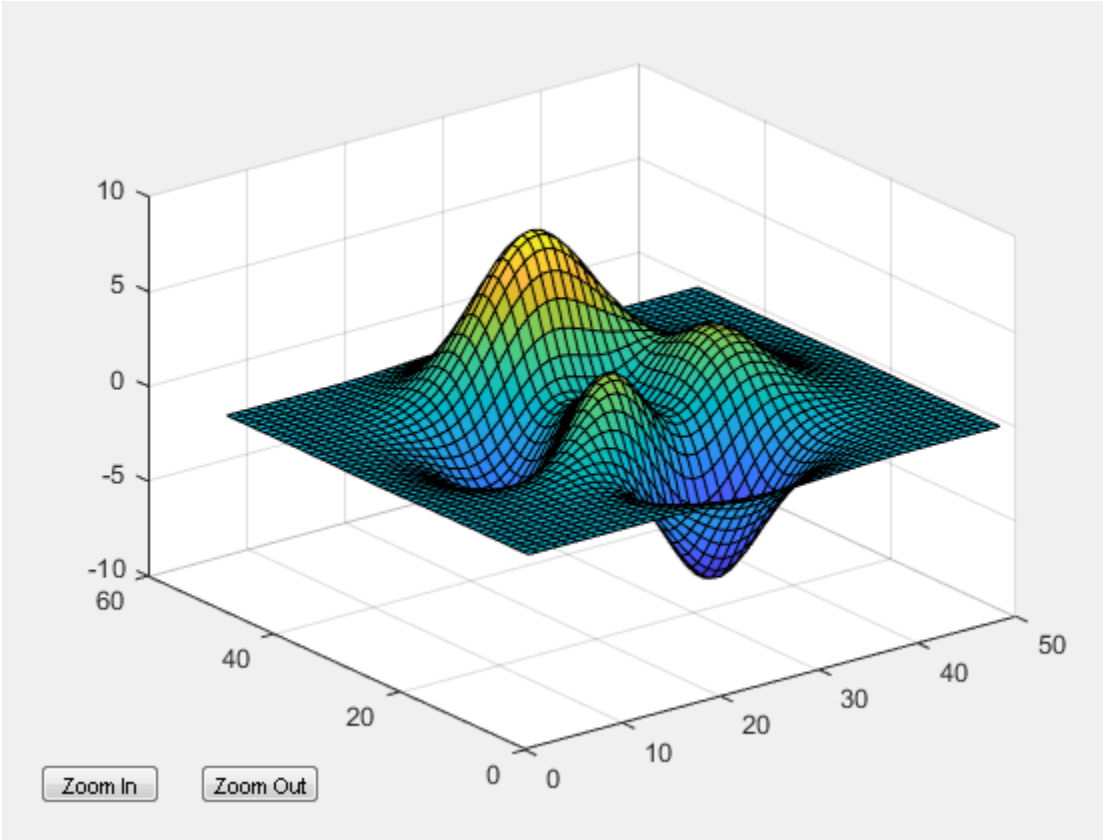

See Also

`axis` | `campos` | `camup` | `camtarget`

Topics

"Camera Graphics Terminology"

Introduced before R2006a

camzoom

Zoom in and out on scene

Syntax

```
camzoom(zoom_factor)
camzoom(axes_handle,...)
```

Description

`camzoom(zoom_factor)` zooms in or out on the scene depending on the value specified by `zoom_factor`. If `zoom_factor` is greater than 1, the scene appears larger; if `zoom_factor` is greater than zero and less than 1, the scene appears smaller.

`camzoom(axes_handle,...)` operates on the axes identified by the first argument, `axes_handle`. When you do not specify an axes handle, `camzoom` operates on the current axes.

Tips

`camzoom` sets the axes CameraViewAngle property, which in turn causes the CameraViewAngleMode property to be set to `manual`. Note that setting the `CameraViewAngle` property disables the MATLAB stretch-to-fill feature (stretching of the axes to fit the window). This may result in a change to the aspect ratio of your graph. See the `axes` function for more information on this behavior.

See Also

`axes` | `camdolly` | `campan` | `camorbit` | `camroll` | `camva`

Topics

"Camera Graphics Terminology"

Introduced before R2006a

cartToBary

Class: TriRep

(Not recommended) Convert point coordinates from Cartesian to barycentric

---

Note: `cartToBary(TriRep)` is not recommended. Use cartesianToBarycentric(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
B = cartToBary(TR, SI, XC)
```

Description

`B = cartToBary(TR, SI, XC)` returns the barycentric coordinates of each point in `XC` with respect to its associated simplex `SI`.

Input Arguments

`TR`	Triangulation representation.
`SI`	Column vector of simplex indices that index into the triangulation matrix `TR.Triangulation`.
`XC`	Matrix that represents the Cartesian coordinates of the points to be converted. `XC` is of size `m`-by-`n`, where `m` is of `length(SI)`, the number of points to convert, and `n` is the dimension of the space where the triangulation resides.

Output Arguments

`B`	Matrix of dimension `m`-by-`k` where `k` is the number of vertices per simplex.

Examples

Compute the Delaunay triangulation of a set of points.

```
x = [0 4 8 12 0 4 8 12]';
y = [0 0 0 0 8 8 8 8]';
dt = DelaunayTri(x,y)
```

Compute the barycentric coordinates of the incenters.

```
cc = incenters(dt);
tri = dt(:,:);
```

Plot the original triangulation and reference points.

```
figure
subplot(1,2,1);
triplot(dt); hold on;
plot(cc(:,1), cc(:,2), '*r');
hold off;
axis equal;
```

Stretch the triangulation and compute the mapped locations of the incenters on the deformed triangulation.

```
b = cartToBary(dt,[1:length(tri)]',cc);
y = [0 0 0 0 16 16 16 16]';
tr = TriRep(tri,x,y)
xc = baryToCart(tr, [1:length(tri)]', b);
```

Plot the deformed triangulation and mapped locations of the reference points.

```
subplot(1,2,2);
triplot(tr);
hold on;
plot(xc(:,1), xc(:,2), '*r');
hold off;
axis equal;
```

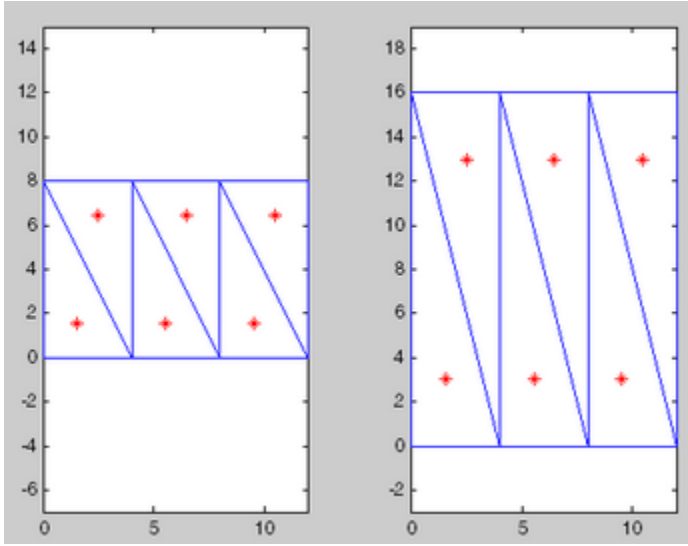

Definitions

Simplex

A simplex is a triangle/tetrahedron or higher dimensional equivalent.

See Also

delaunayTriangulation | barycentricToCartesian | pointLocation | triangulation

cart2pol

Transform Cartesian coordinates to polar or cylindrical

Syntax

```
[theta,rho] = cart2pol(x,y)
[theta,rho,z] = cart2pol(x,y,z)
```

Description

`[theta,rho] = cart2pol(x,y)` transforms corresponding elements of the two-dimensional Cartesian coordinate arrays `x` and `y` into polar coordinates `theta` and `rho`.

`[theta,rho,z] = cart2pol(x,y,z)` transforms three-dimensional Cartesian coordinate arrays `x`, `y`, and `z` into cylindrical coordinates `theta`, `rho`, and `z`.

Examples

Cartesian to Polar Coordinates

Convert the Cartesian coordinates defined by corresponding entries in matrices `x` and `y` to polar coordinates `theta` and `rho`.

```
x = [5 3.5355 0 -10]
```

```
x =

    5.0000    3.5355         0  -10.0000
```

```
y = [0 3.5355 10 0]
```

```
y =

         0    3.5355   10.0000         0
```

```
[theta,rho] = cart2pol(x,y)
```

```
theta =

         0    0.7854    1.5708    3.1416


rho =

    5.0000    5.0000   10.0000   10.0000
```

Cartesian to Cylindrical Coordinates

Convert the three-dimensional Cartesian coordinates defined by corresponding entries in the matrices `x`, `y`, and `z` to cylindrical coordinates `theta`, `rho`, and `z`.

```
x = [1 2.1213 0 -5]'
```

```
x =

    1.0000
    2.1213
         0
   -5.0000
```

```
y = [0 2.1213 4 0]'
```

```
y =

         0
    2.1213
    4.0000
         0
```

```
z = [7 8 9 10]'
```

```
z =

     7
     8
     9
    10
```

```
[theta,rho,z] = cart2pol(x,y,z)
```

```
theta =

         0
    0.7854
    1.5708
    3.1416


rho =

    1.0000
    3.0000
    4.0000
    5.0000


z =

     7
     8
     9
    10
```

Input Arguments

x, y, z — Cartesian coordinates

scalars | vectors | matrices | multidimensional arrays

Cartesian coordinates, specified as scalars, vectors, matrices, or multidimensional arrays. `x`, `y`, and `z` must be the same size, or any of them can be scalar.

Data Types: `single` | `double`

Output Arguments

theta — Angular coordinate

array

Angular coordinate, returned as an array. `theta` is the counterclockwise angle in the *x*-*y* plane measured in radians from the positive *x*-axis.

rho — Radial coordinate
array

Radial coordinate, returned as an array. `rho` is the distance from the origin to a point in the *x*-*y* plane.

z — Elevation coordinate
array

Elevation coordinate, returned as an array. `z` is the height above the *x*-*y* plane.

Algorithms

The mapping from two-dimensional Cartesian coordinates to polar coordinates, and from three-dimensional Cartesian coordinates to cylindrical coordinates is



Two-Dimensional Mapping

```
theta = atan2(y,x)
rho = sqrt(x.^2 + y.^2)
```



Three-Dimensional Mapping

```
theta = atan2(y,x)
rho = sqrt(x.^2 + y.^2)
z = z
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cart2sph` | `pol2cart` | `sph2cart`

Introduced before R2006a

cart2sph

Transform Cartesian coordinates to spherical

Syntax

```
[azimuth,elevation,r] = cart2sph(x,y,z)
```

Description

`[azimuth,elevation,r] = cart2sph(x,y,z)` transforms corresponding elements of the Cartesian coordinate arrays `x`, `y`, and `z` to spherical coordinates `azimuth`, `elevation`, and `r`.

Examples

Cartesian to Spherical Coordinates

Convert the Cartesian coordinates defined by corresponding entries in the matrices `x`, `y`, and `z` to spherical coordinates `az`, `el`, and `r`. These points correspond to the eight vertices of a cube.

```
x = [1 1 1 1; -1 -1 -1 -1]
```

```
x =

     1     1     1     1
    -1    -1    -1    -1
```

```
y = [1 1 -1 -1; 1 1 -1 -1]
```

```
y =

     1     1    -1    -1
     1     1    -1    -1
```

```
z = [1 -1 1 -1; 1 -1 1 -1]
```

```
z =
```

```
     1    -1     1    -1
     1    -1     1    -1
```

```
[az,el,r] = cart2sph(x,y,z)
```

```
az =

    0.7854    0.7854   -0.7854   -0.7854
    2.3562    2.3562   -2.3562   -2.3562


el =

    0.6155   -0.6155    0.6155   -0.6155
    0.6155   -0.6155    0.6155   -0.6155


r =

    1.7321    1.7321    1.7321    1.7321
    1.7321    1.7321    1.7321    1.7321
```

Input Arguments

`x,y,z` — Cartesian coordinates

scalars | vectors | matrices | multidimensional arrays

Cartesian coordinates, specified as scalars, vectors, matrices, or multidimensional arrays. `x`, `y`, and `z` must be the same size, or any of them can be scalar.

Data Types: `single` | `double`

Output Arguments

`azimuth` — Azimuth angle

array

Azimuth angle, returned as an array. `azimuth` is the counterclockwise angle in the *x*-*y* plane measured in radians from the positive *x*-axis.

`elevation` — Elevation angle
array

Elevation angle, returned as an array. `elevation` is the elevation angle in radians from the *x*-*y* plane.

`r` — Radius
array

Radius, returned as an array. `r` is the distance from the origin to a point. The length units of `r` are arbitrary, matching the units of the input arrays `x`, `y`, and `z`.

Algorithms

The mapping from three-dimensional Cartesian coordinates to spherical coordinates is

```
azimuth = atan2(y,x)
elevation = atan2(z,sqrt(x.^2 + y.^2))
r = sqrt(x.^2 + y.^2 + z.^2)
```

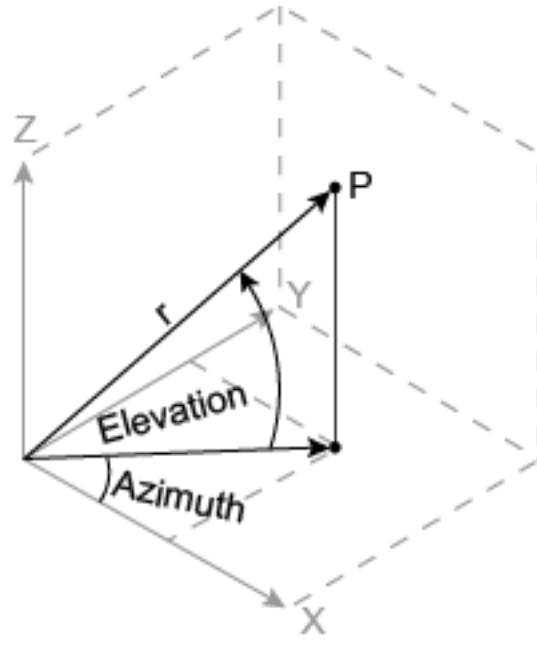

The notation for spherical coordinates is not standard. For the `cart2sph` function, `elevation` is measured from the *x-y* plane. Notice that if `elevation = 0`, the point is in the *x-y* plane. If `elevation = pi/2`, then the point is on the positive *z*-axis.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cart2pol` | `pol2cart` | `sph2cart`

Introduced before R2006a

cast

Cast variable to different data type

Syntax

```
B = cast(A,newclass)
B = cast(A,'like',p)
```

Description

`B = cast(A,newclass)` converts `A` to class `newclass`, where `newclass` is the name of a built-in data type compatible with `A`. The `cast` function truncates any values in `A` that are too large to map into `newclass`.

`B = cast(A,'like',p)` converts `A` to the same data type and sparsity as the variable `p`. If `A` and `p` are both real, then `B` is also real. Otherwise, `B` is complex.

Examples

Convert Numeric Data Type

Convert an `int8` value to `uint8`.

Define a scalar 8-bit integer.

```
a = int8(5);
```

Convert `a` to an unsigned 8-bit integer.

```
b = cast(a,'uint8');
class(b)
```

```
ans =
'uint8'
```

Match Data Type and Complex Nature of p

Define a complex `fi` object.

```
p = fi( [1+2i 3i],1,24,12);
```

Define a scalar 8–bit integer.

```
a = int8(5);
```

Convert `a` to the same data type and complexity as `p`.

```
b = cast(a,'like',p)
```

```
b =

   5.0000 + 0.0000i

          DataTypeMode: Fixed-point: binary point scaling
            Signedness: Signed
            WordLength: 24
        FractionLength: 12
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`class` | `typecast`

Topics

"Class Support for Array-Creation Functions"

Introduced before R2006a

cat

Concatenate arrays along specified dimension

Syntax

```
C = cat(dim, A, B)
C = cat(dim, A1, A2, A3, A4, ...)
```

Description

`C = cat(dim, A, B)` concatenates the arrays `A` and `B` along array the dimension specified by `dim`. The `dim` argument must be a real, positive, integer value.

`C = cat(dim, A1, A2, A3, A4, ...)` concatenates all the input arrays (`A1`, `A2`, `A3`, `A4`, and so on) along array dimension `dim`.

For nonempty arrays, `cat(2, A, B)` is the same as `[A, B]`, and `cat(1, A, B)` is the same as `[A; B]`.

If your input arrays are tables or timetables, `dim` must be either 1 or 2. `cat` then concatenates by calling `horzcat` or `vertcat` respectively.

Examples

Given

```
A =                     B =
     1     2                    5     6
     3     4                    7     8
```

concatenating along different dimensions produces

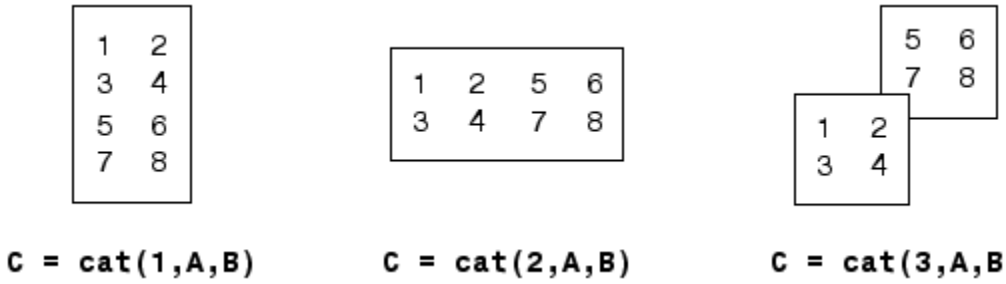

The commands

```
A = magic(3); B = pascal(3);
C = cat(4, A, B);
```

produce a 3-by-3-by-1-by-2 array.

Tips

When used with comma-separated list syntax, `cat(dim, C{:})` or `cat(dim, C.field)` is a convenient way to concatenate a cell or structure array containing numeric matrices into a single matrix.

You can concatenate categorical arrays with cell arrays of character vectors. For more information, see “Combine Categorical Arrays”.

If all the input arrays are ordinal categorical arrays, they must have the same sets of categories including their order. For more information, see “Ordinal Categorical Arrays”.

You can concatenate datetime arrays with cell arrays of character vectors.

You can concatenate duration arrays and calendar duration arrays. The result is a calendar duration array.

You can concatenate duration or calendar duration arrays with numeric arrays. Prior to concatenation, MATLAB converts the numeric array to an array of equivalent days using the `days` function.

You can concatenate string arrays with numeric arrays, logical arrays, character vectors, or cell arrays. The non-string arrays are first converted to a string array, and the output is returned as a string array.

For information on combining unlike integer types, integers with nonintegers, cell arrays with non-cell arrays, or empty matrices with other elements, see "Valid Combinations of Unlike Classes"

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

Concatenation in the tall dimension (dimension one) is not supported.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support concatenation of cell arrays.
- If supplied, `dim` must be a constant.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

`vertcat` | `strcat` | `char` | `horzcat` | `num2cell` | `reshape` | `squeeze` | `strjoin` | `shiftdim`

Introduced before R2006a

categorical

Create categorical array

Use `categorical` to create a categorical array from data with values from a finite set of discrete categories. To group numeric data into categories, use `discretize`.

Syntax

```
B = categorical(A)
B = categorical(A,valueset)
B = categorical(A,valueset,catnames)
B = categorical(A, ___ ,Name,Value)
```

Description

`B = categorical(A)` creates a categorical array from the array, `A`. The categories of `B` are the sorted unique values from `A`.

For more information on creating and using categorical arrays, see “Categorical Arrays”.

`B = categorical(A,valueset)` creates one category for each value in `valueset`. The categories of `B` are in the same order as the values of `valueset`.

You can use `valueset` to include categories for values not present in `A`. Conversely, if `A` contains any values not present in `valueset`, the corresponding elements of `B` are undefined.

`B = categorical(A,valueset,catnames)` names the categories in `B` by matching the category values in `valueset` with the names in `catnames`.

`B = categorical(A, ___ ,Name,Value)` creates a categorical array with additional options specified by one or more `Name,Value` pair arguments. You can include any of the input arguments in previous syntaxes.

For example, you can specify that the categories have a mathematical ordering.

Examples

Create Categorical Array from Character Vectors

Convert a cell array of character vectors to a categorical array.

Create a cell array of character vectors.

```
A = {'r' 'b' 'g'; 'g' 'r' 'b'; 'b' 'r' 'g'}
```

```
A = 3×3 cell array
    'r'    'b'    'g'
    'g'    'r'    'b'
    'b'    'r'    'g'
```

A is a 3-by-3 cell array containing three unique values.

Convert the cell array of character vectors, A, to a categorical array, B.

```
B = categorical(A)
```

```
B = 3×3 categorical array
     r      b      g
     g      r      b
     b      r      g
```

The contents of B match the contents of A.

Display the categories of B.

```
categories(B)
```

```
ans = 3×1 cell array
    'b'
    'g'
    'r'
```

The categories of B are the unique values from A in alphabetical order.

Create Categorical Array and Specify Possible Unique Values

Convert a cell array of character vectors, A, to a categorical array. Specify a list of categories that includes values that are not present in A.

Create a cell array of character vectors.

```
A = {'republican' 'democrat'; 'democrat' 'democrat'; 'democrat' 'republican'}
```

```
A = 3×2 cell array
    'republican'    'democrat'
    'democrat'      'democrat'
    'democrat'      'republican'
```

A is a 3-by-2 cell array containing two unique values.

Convert the cell array of character vectors, A, to a categorical array, B and include a category for `independent`.

```
valueset = {'democrat' 'republican' 'independent'};
B = categorical(A,valueset)
```

```
B = 3×2 categorical array
     republican      democrat
     democrat        democrat
     democrat        republican
```

The contents of B match the contents of A.

Display the categories of B.

```
categories(B)
```

```
ans = 3×1 cell array
    'democrat'
    'republican'
    'independent'
```

The categories of B are in the same order as the values specified in `valueset`.

Create Categorical Array and Specify Category Names

Create a cell array of character vectors.

```
A = {'r' 'b' 'g'; 'g' 'r' 'b'; 'b' 'r' 'g'}
```

```
A = 3×3 cell array
    'r'    'b'    'g'
    'g'    'r'    'b'
    'b'    'r'    'g'
```

A is a 3-by-3 cell array containing three unique values.

Convert the cell array of character vectors, A, to a categorical array, B, and specify category names.

```
B = categorical(A,{'r' 'g' 'b'},{'red' 'green' 'blue'})
```

```
B = 3×3 categorical array
     red        blue      green
     green      red       blue
     blue       red       green
```

B uses the specified category names for the contents from A.

Display the categories of B.

```
categories(B)
```

```
ans = 3×1 cell array
    'red'
    'green'
    'blue'
```

The categories of B are in the order they were specified.

Create Categorical Array from String Array

Starting in R2016b, you can create string arrays using the `string` function. Convert a string array to a categorical array and then change its category names.

```
str = string({'plane','jet','plane','helicopter','jet'})
```

```
str = 1×5 string array
    "plane"    "jet"    "plane"    "helicopter"    "jet"
```

```
C = categorical(str)
```

```
C = 1×5 categorical array
     plane      jet      plane      helicopter      jet
```

Specify new category names. When you convert a string array, `valueset` can be either a string array or a cell array of character vectors. However, when you specify new category names, you must specify `catnames` as a cell array of character vectors.

```
valueset = string({'plane','jet','helicopter'})
```

```
valueset = 1×3 string array
    "plane"    "jet"    "helicopter"
```

```
catnames = {'PLN','JET','HEL'}
```

```
catnames = 1×3 cell array
    'PLN'    'JET'    'HEL'
```

Display the category with new category names.

```
C = categorical(str,valueset,catnames)
```

```
C = 1×5 categorical array
     PLN      JET      PLN      HEL      JET
```

Convert Missing Strings to Undefined Categorical Values

Convert a string array with missing elements to a categorical array. Where the string array contains a missing value, the categorical array contains an undefined value.

```
str = string({'jet','plane','helicopter'});
str(5) = 'plane';
str
```

```
str = 1×5 string array
    "jet"    "plane"    "helicopter"    <missing>    "plane"
```

```
C = categorical(str)
```

```
C = 1×5 categorical array
     jet      plane      helicopter      <undefined>      plane
```

Create Categorical Array from Integers

Create a 2-by-3 numeric array.

```
A = gallery('integerdata',3,[2,3],3)
```

```
A =

     2     1     2
     1     1     3
```

A contains the values 1, 2, and 3.

Convert the numeric array, A, to a categorical array. Use the values 1, 2, and 3 to define the categories car, bus, and bike, respectively.

```
valueset = 1:3;
catnames = {'car' 'bus' 'bike'};
```

```
B = categorical(A,valueset,catnames)
```

```
B = 2×3 categorical array
     bus      car      bus
     car      car      bike
```

categorical maps the numeric values in valueset to the category names in catnames.

The 2-by-3 categorical array, B, is not ordinal. Therefore, you can only compare the values in B for equality. To compare the values in B using relational operators, such as less than and greater than, you must include the 'Ordinal',true name-value pair argument.

Create Ordinal Categorical Array from Integers

Create a 5-by-2 numeric array.

```
A = gallery('integerdata',3,[5,2],1)
```

```
A =

     3     2
     3     3
     3     2
     2     1
     3     2
```

A contains the values 1, 2, and 3.

Convert the numeric array, A, to an ordinal categorical array where 1, 2, and 3 represent child, adult, and senior respectively.

```
valueset = [1:3];
catnames = {'child' 'adult' 'senior'};

B = categorical(A,valueset,catnames,'Ordinal',true)
```

```
B = 5×2 categorical array
     senior      adult
     senior      senior
     senior      adult
     adult       child
     senior      adult
```

Since B is ordinal, the categories of B have a mathematical ordering, `child < adult < senior`.

Create Categorical Array by Binning Numeric Data

Use the `discretize` function (instead of `categorical`) to bin 100 random numbers into three categories.

```
x = rand(100,1);
y = discretize(x,[0 .25 .75 1],'categorical',{'small','medium','large'});
summary(y)
```

```
     small       22
     medium      46
```

```
large       32
```

Input Arguments

A — Input array

numeric array | logical array | categorical array | string array | cell array of character vectors | ...

Input array, specified as a numeric array, logical array, categorical array, string array, or cell array of character vectors.

`categorical` removes leading and trailing spaces from input values that are strings or character vectors.

If `A` contains missing values, the corresponding element of `B` is `<undefined>`. Missing values are `NaN` for numeric arrays, the missing string (`<missing>`) or the empty string (`string('')`) for string arrays, the empty character vector (`''`) for cell arrays of character vectors, and `<undefined>` for categorical arrays. `B` does not have a category for undefined values. To create an explicit category for missing or undefined values, you must include the desired category name in `catnames`, and `NaN`, `<missing>`, the empty string, the empty character vector, or `<undefined>` in `valueset`.

In addition to an array, `A` can be an object with the following class methods:

- `unique`
- `eq`

`valueset` — Values to define categories

`unique(A)` (default) | vector of unique values

Values to define categories, specified as a vector of unique values. The data type of `valueset` and the data type of `A` must be the same, except when `A` is a string array. In that case, `valueset` either can be a string array or a cell array of character vectors.

`categorical` removes leading and trailing spaces from elements of `valueset` that are strings or character vectors.

`catnames` — Category names

cell array of character vectors

Category names, specified as a cell array of character vectors. If you do not specify the `catnames` input argument, `categorical` uses the values in `valueset` as category names.

To merge multiple distinct values in A into a single category in B, include duplicate names corresponding to those values.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Ordinal',true` specifies that the categories have a mathematical ordering

`'Ordinal'` — Mathematical ordering indicator
`false` (default) | `true` | `0` | `1`

Mathematical ordering indicator, specified as the comma-separated pair consisting of `'Ordinal'` and either `false`, `true`, `0`, or `1`.

`false`	`categorical` creates a categorical array that is not ordinal. This is the default behavior. The categories of B have no mathematical ordering. Therefore, you can only compare the values in B for equality.
`true`	`categorical` creates an ordinal categorical array. The categories of B have a mathematical ordering, such that the first category specified is the smallest and the last category is the largest. You can compare the values in B using relational operators, such as less than and greater than, in addition to comparing the values for equality.

`'Protected'` — Category protection indicator
`false` | `true` | `0` | `1`

Category protection indicator specified as the comma-separated pair consisting of `'Protected'` and either `false`, `true`, `0`, or `1`. The categories of ordinal

categorical arrays are always protected. The default value is `true` when you specify `'Ordinal',true` and false otherwise.

`false`	When you assign new values to `B`, the categories update automatically. Therefore, you can combine (nonordinal) categorical arrays that have different categories. The categories can update accordingly to include the categories from both arrays.
`true`	When you assign new values to `B`, the values must belong to one of the existing categories. Therefore, you can only combine arrays that have the same categories. To add new categories to `B`, you must use the function `addcats`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

With the syntax `C = categorical(data)`, the order of categories is undefined. Use `valueset` and `categoryNames` to enforce the order.

For more information, see “Tall Arrays”.

See Also

See Also

`categories` | `discretize`

Topics

“Advantages of Using Categorical Arrays”

Introduced in R2013b

CategoricalRuler Properties

Control axis with categorical values

Description

`CategoricalRuler` properties control the appearance and behavior of an *x*-axis, *y*-axis, or *z*-axis that shows categorical values. Each individual axis has its own ruler object. By changing property values of the ruler, you can modify certain aspects of a specific axis.

Use dot notation to refer to a particular ruler and property. Access the ruler objects through the `XAxis`, `YAxis`, and `ZAxis` properties of the `Axes` object. For example:

```
ax = gca;
co = ax.XAxis.Color;
ax.XAxis.Color = 'blue';
```

Appearance

`Color` — Color of axis line and labels

RGB triplet | character vector of a color name | `'none'`

Color of the axis line and labels, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the axis is invisible.

Example: `ax.XAxis.Color = 'red';`

Example: `ax.YAxis.Color = [0.1 0.7 0.8];`

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`

Long Name	Short Name	RGB Triplet
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Note: The `Color` property for the ruler and the associated `XColor`, `YColor`, or `ZColor` property for the parent axes always have the same value. Setting one also sets the other.

`LineWidth` — Width of axis line and tick marks

`0.5` (default) | positive value

Width of axis line and tick marks, specified as a positive value in point units. One point equals 1/72 inch.

Example: `ax.XAxis.LineWidth = 2;`

Note: Setting the `LineWidth` property for the parent axes sets the `LineWidth` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

`Label` — Axis label

text object (default)

Axis label, which is a text object. To display text or change existing text, set the `String` property for the text object. Use other properties to change the text appearance, such as the font style or color.

```
ax = gca;
ax.XAxis.Label.String = 'X Axis';
ax.XAxis.Label.FontSize = 12;
```

For a full list of options, see Text Properties.

Alternatively, add or modify the axis labels using the `xlabel`, `ylabel`, and `zlabel` functions.

Note: The text object is not a child of the ruler object, so it cannot be returned by `findobj` and it does not use the default text property values.

`Visible` — Axis visibility

`'on'` (default) | `'off'`

Axis visibility, specified as one of these values:

- `'on'` — Display the axis.
- `'off'` — Hide the axis without deleting it. You still can access properties of an invisible axis using the ruler object.

Example: `ax.XAxis.Visible = 'off';`

Scale and Direction

`Scale` — Scale of values along axis

`'linear'` (default)

Scale of values along axis, specified as `'linear'`.

`Direction` — Direction of increasing values

`'normal'` (default) | `'reverse'`

Direction of increasing values, specified as one of these values:

- `'normal'` — Values increase from left to right or bottom to top.
- `'reverse'` — Values increase from right to left or top to bottom.

Note: The `Direction` property for the ruler and the associated `XDir`, `YDir`, or `ZDir` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.Direction = 'reverse';`

Tick Values and Labels

`Categories` — Categories plotted along axis

cell array of character vectors | categorical array | string array

Categories plotted along the axis, specified as a cell array of character vectors, a categorical array, or a string array. Querying this property returns a cell array of character vectors. Set this property to exclude certain categories from appearing in the chart.

Example: `ax.XAxis.Categories = categorical({'small','medium','large'})` specifies a categorical array.

Example: `ax.XAxis.Categories = {'small','medium','large'}` specifies a cell array.

Example: `ax.XAxis.Categories = string({'small','medium','large'})` specifies a string array.

Example

Create a histogram with categories along the x-axis and query the `Categories` property. Then set the `Categories` property so that only a subset of categories appear along the axis.

```
A =  categorical({'r' 'b' 'g' 'g' 'r' 'b' 'b' 'r' 'g' 'y' 'g' 'm'});
h = histogram(A);
ax = gca;
ax.XAxis.Categories
```

```
ans =

  1×5 categorical array

     b      g      m      r      y
```

```
ax.XAxis.Categories = categorical({'b','m','y'});
```

Data Types: `cell` | `categorical` | `string`

`Limits` — First and last categories displayed along axis

two-element vector

First and last categories displayed along the axis, specified as a two-element vector indicating two category names. The categories must be two of the categories in the `Categories` property, and must appear in the same relative order that they appear in the `Categories` property.

Example: `ax.XAxis.Categories = categorical({'small','medium'})` specifies a two-element categorical array.

Example: `ax.XAxis.Categories = {'small','medium'}` specifies a two-element cell array.

Example: `ax.XAxis.Categories = string({'small','medium'})` specifies a two-element string array.

If you assign a value to this property, then MATLAB changes the associated `LimitsMode` property to `'manual'`.

Alternatively, set the limits using the `xlim`, `ylim`, and `zlim` functions.

Note: The `Limits` property for the ruler and the associated `XLim`, `YLim`, or `ZLim` property for the parent axes always have the same value. Setting one also sets the other.

Example

Set the `Limits` property to only show the categories between `'b'` and `'m'` along the axis.

```
A =  categorical({'r' 'b' 'g' 'g' 'r' 'b' 'b' 'r' 'g' 'y' 'g' 'm'});
h = histogram(A);
ax = gca;
ax.XAxis.Limits = categorical({'b','m'});
```

Data Types: `categorical` | `string` | `cell`

`LimitsMode` — Selection mode for `Limits` property

`'auto'` (default) | `'manual'`

Selection mode for the `Limits` property, specified as one of these values:

- `'auto'` — Automatically select the axis limits based on the data plotted.
- `'manual'` — Use axis limit values that you specify. To specify the axis limits, set the `Limits` property.

Note: The `LimitsMode` property for the ruler and the associated `XLimMode`, `YLimMode`, or `ZLimMode` property for the parent axes always have the same value. Setting one also sets the other.

`TickValues` — Tick mark locations along the axis

cell array of character vectors | categorical array | string array

Tick mark locations along the axis, specified as a cell array of character vectors, a categorical array, or a string array indicating category names. The categories must be a subset of the categories in the `Categories` property and must appear in the same relative order that they appear in the `Categories` property. To remove all tick marks and labels along the axis, set this property to an empty array `[]`.

Example: `ax.XAxis.Categories = categorical({'small','medium','large'})` specifies a categorical array.

Example: `ax.XAxis.Categories = {'small','medium','large'}` specifies a cell array.

Example: `ax.XAxis.Categories = string({'small','medium','large'})` specifies a string array.

If you assign a value to this property, then MATLAB sets the `TickValuesMode` property to `'manual'`.

Alternatively, use the `xticks`, `yticks`, and `zticks` functions.

Note: The `TickValues` property for the ruler and the associated `XTick`, `YTick`, or `ZTick` property for the parent axes always have the same value. Setting one also sets the other.

Example

Label a subset of categories along the axis by setting the `TickValues` property to a subset of categories.

```
A =  categorical({'r' 'b' 'g' 'g' 'r' 'b' 'b' 'r' 'g' 'y' 'g' 'm'});
h = histogram(A);
ax = gca;
ax.XAxis.TickValues = categorical({'b','m','y'});
```

Data Types: `categorical` | `string` | `cell`

`TickValuesMode` — Selection mode for `TickValues` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickValues` property, specified as one of these values:

- `'auto'` — Automatically select the tick values based on the data plotted.
- `'manual'` — Use tick values that you specify. To specify the values, set the `TickValues` property.

Note: The `TickValuesMode` property for the ruler and the associated `XTickMode`, `YTickMode`, or `ZTickMode` property for the parent axes always have the same value. Setting one also sets the other.

`TickLabels` — Tick mark labels

`''` (default) | cell array of character vectors | string array

Tick mark labels, specified as a cell array of character vectors or a string array. Use this property to relabel the tick marks without changing the category names. If you do not specify a label for every value, then the labels repeat. The labels support TeX and LaTeX markup. See the `TickLabelInterpreter` property for more information.

If you set this property, then MATLAB sets the `TickLabelsMode` property to `'manual'`.

Alternatively, specify the tick labels using the `xticklabels`, `yticklabels`, and `zticklabels` functions.

Note: The `TickLabels` property for the ruler and the associated `XTickLabel`, `YTickLabel`, or `ZTickLabel` property for the parent axes always have the same value. Setting one also sets the other.

Example

Relabel the categories along the x-axis.

```
A =  categorical({'r' 'b' 'g' 'g' 'r' 'b' 'b' 'r' 'g' 'y' 'g'});
h = histogram(A);
ax = gca;
ax.XAxis.TickLabels = {'Blue','Green','Red','Yellow'}
```

Data Types: `char` | `string`

`TickLabelsMode` — Selection mode for `TickLabels` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickLabels` property, specified as one of these values:

- `'auto'` — Automatically select the tick labels.
- `'manual'` — Use tick labels that you specify. To specify the labels, set the `TickLabels` property.

Note: The `TickLabelsMode` property for the ruler and the associated `XTickLabelMode`, `YTickLabelMode`, or `ZTickLabelMode` property for the parent axes always have the same value. Setting one also sets the other.

`TickLabelInterpreter` — Interpretation of tick label characters

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of tick label characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

Note: Setting the `TickLabelInterpreter` property for the parent axes sets the `TickLabelInterpreter` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.TickLabelInterpreter = 'latex';`

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the text type and color, and include special characters in the text.

This table lists the supported modifiers with the `TickLabelInterpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the text within the curly braces `{}`.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (rarely available)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Set `specifier` as the name of a font family to change the font style. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Set `specifier` as a scalar numeric value to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Set `specifier` as a three-element RGB triplet to change the font color.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\alpha	α	\upsilon	υ	\sim	~
\angle	∠	\phi	ϕ	\leq	≤
\ast	*	\chi	χ	\infty	∞
\beta	β	\psi	ψ	\clubsuit	♣
\gamma	γ	\omega	ω	\diamondsuit	♦
\delta	δ	\Gamma	Γ	\heartsuit	♥
\epsilon	ε	\Delta	Δ	\spadesuit	♠
\zeta	ζ	\Theta	Θ	\leftrightarrow	↔
\eta	η	\Lambda	Λ	\leftarrow	←
\theta	θ	\Xi	Ξ	\Leftarrow	⇐
\vartheta	ϑ	\Pi	Π	\uparrow	↑
\iota	ι	\Sigma	Σ	\rightarrow	→
\kappa	κ	\Upsilon	ϒ	\Rightarrow	⇒
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `TickLabelInterpreter` property to `'latex'`. Use dollar symbols around the labels, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$\int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup within the text. The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this is reduced by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

`TickLabelRotation` — Rotation of tick labels
scalar value in degrees

Rotation of tick labels, specified as a scalar value in degrees. Positive values give counterclockwise rotation. Negative values give clockwise rotation.

Alternatively, you can rotate the tick labels using the `xtickangle`, `ytickangle`, and `ztickangle` functions.

Note: The `TickLabelRotation` property for the ruler and the associated `XTickLabelRotation`, `YTickLabelRotation`, or `ZTickLabelRotation` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.TickLabelRotation = 45;`

Example: `ax.YAxis.TickLabelRotation = -45;`

`TickLabelRotationMode` — Selection mode for `TickLabelRotation` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickLabelRotation` property, specified as one of these values:

- `'auto'` — Automatically select the tick label rotation.
- `'manual'` — Use a tick label rotation that you specify. To specify the rotation, set the `TickLabelRotation` property.

`TickDirection` — Tick mark direction

`'in'` (default) | `'out'` | `'both'`

Tick mark direction, specified as one of these values:

- `'in'` — Direct the tick marks inward from the axis lines. This is the default for 2-D views.
- `'out'` — Direct the tick marks outward from the axis lines. This is the default for 3-D views.
- `'both'` — Center the tick marks over the axis lines.

If you assign a value to this property, then MATLAB sets the `TickDirectionMode` property to `'manual'`.

Note: Setting the `TickDir` property for the parent axes sets the `TickDirection` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.YAxis.TickDirection = 'out';`

`TickDirectionMode` — Selection mode for `TickDirection` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickDirection` property, specified as one of these values:

- `'auto'` — Automatically select the tick direction.
- `'manual'` — Use a tick direction that you specify. To specify the tick direction, set the `TickDirection` property.

`TickLength` — Tick mark length

two-element vector

Tick mark length, specified as a two-element vector of the form `[2Dlength 3Dlength]`. The first element is the tick mark length in 2-D views. The second element is the tick mark length in 3-D views. Specify the values in units normalized relative to the longest axes dimension.

Note: Setting the `TickLength` property for the parent axes sets the `TickLength` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.YAxis.TickLength = [0.02 0.035];`

`MinorTick` — Minor tick mark display

`'off'` (default) | `'on'`

Minor tick mark display, specified as one of these values:

- `'off'` — Do not display minor tick marks. This is the default value for an axis with a linear scale.
- `'on'` — Display minor tick marks between the major tick marks on the axis. This is the default value for an axis with a log scale. The space between the major tick marks determines the number of minor tick marks. If the `MinorTickValues` property is set to empty `[]`, then no minor tick marks appear. Specify the tick mark locations by setting the `MinorTickValues` property.

Note: The `MinorTick` property for the ruler and the associated `XMinorTick`, `YMinorTick`, or `ZMinorTick` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.MinorTick = 'on';`

`MinorTickValues` — Minor tick mark locations

cell array of character vectors | categorical array | string array

Minor tick mark locations, specified as a cell array of character vectors, a categorical array, or a string array indicating category names. The categories must be a subset of the categories in the `Categories` property and must appear in the same relative order that they appear in the `Categories` property.

If you assign values to this property, then MATLAB sets the `MinorTickValuesMode` property to `'manual'`.

Data Types: `categorical` | `string` | `cell`

`MinorTickValuesMode` — Selection mode for `MinorTickValues` property

`'auto'` (default) | `'manual'`

Selection mode for the `MinorTickValues` property, specified as one of these values:

- `'auto'` — Use automatically calculated minor tick values.
- `'manual'` — Use minor tick values that you specify. To specify the values, set the `MinorTickValues` property.

Font

`FontName` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as a system supported font name or `'FixedWidth'`. The default font depends on the specific system and locale. To use a fixed-width font that renders well, specify `'FixedWidth'`. The actual fixed-width font used depends on the `FixedWidthFontName` property of the root object.

Note: Setting the `FontName` property for the parent axes sets the `FontName` property for the ruler to the same value. However, setting the ruler property does not set the axes

property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontName = 'Cambria';`

`FontSize` — Font size
`10` (default) | scalar numeric value

Font size, specified as a scalar numeric value.

Note: Setting the `FontSize` property for the parent axes sets the `FontSize` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontSize = 12;`

`FontWeight` — Thickness of text characters
`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font.
- `'bold'` — Thicker character outlines than normal.

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: Setting the `FontWeight` property for the parent axes sets the `FontWeight` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontWeight = 'bold';`

`FontAngle` — Text character slant
`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font can look the same as the normal font.

Note: Setting the `FontAngle` property for the parent axes sets the `FontAngle` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontAngle = 'italic';`

`FontSmoothing` — Text antialiasing

`'on'` (default) | `'off'`

Text smoothing, specified as one of these values:

- `'on'` — Enable text antialiasing to reduce the jagged appearance of text characters and make the text easier to read. In certain cases, smoothed text blends against the background color and can make the text appear blurry.
- `'off'` — Disable text antialiasing. Use this setting if the text seems blurry.

Note: Setting the `FontSmoothing` property for the parent axes sets the `FontSmoothing` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontSmoothing = 'off';`

Parent/Child

`Parent` — Ruler parent

`Axes` object

Ruler parent, specified as an `Axes` object.

Note: Ruler objects are not listed in the `Children` property of the parent `Axes` object.

`Children` — Ruler children
empty `GraphicsPlaceholder` array

The ruler has no children. You cannot set this property.

See Also

See Also
Axes Properties

Introduced in R2017a

categories

Categories of categorical array

Syntax

```
C = categories(A)
```

Description

`C = categories(A)` returns a cell array of character vectors containing the categories of the categorical array, A.

Examples

List Categories in Categorical Array

Create a categorical array, A.

```
A = categorical({'plane' 'car' 'train' 'car' 'plane'})
```

```
A = 1×5 categorical array
     plane      car      train      car      plane
```

A is a 1-by-5 categorical array.

Display the categories of A.

```
C = categories(A)
```

```
C = 3×1 cell array
    'car'
    'plane'
    'train'
```

Since you created A by specifying only an input array, the categories appear in alphabetical order.

List Categories in Ordinal Categorical Array

Create an ordinal categorical array.

```
A = categorical({'medium' 'large'; 'small' 'xlarge'; 'large' 'medium'},...
    {'small' 'medium' 'large' 'xlarge'},'Ordinal',true)
```

```
A = 3×2 categorical array
     medium      large
     small       xlarge
     large       medium
```

A is a 3-by-2 ordinal categorical array.

Display the categories of A.

```
C = categories(A)
```

```
C = 4×1 cell array
    'small'
    'medium'
    'large'
    'xlarge'
```

The categories appear in the order in which you specified them. Since A is ordinal, the categories have the mathematical ordering `small < medium < large < xlarge`.

Input Arguments

A — Categorical array

vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

Tips

- C includes all categories in A, even if A does not contain any data from a category. To see the unique values in A, use `unique(A)`.

- The order of the categories listed in `C` is the same order used by functions, such as `summary` and `histogram`. To change the order of the categories, use `reordercats`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`addcats` | `categorical` | `histogram` | `iscategory` | `mergecats` | `removecats` | `renamecats` | `reordercats` | `setcats` | `unique`

Introduced in R2013b

caxis

Color axis scaling

Syntax

```
caxis([cmin cmax])
caxis auto
caxis manual
caxis(caxis)
v = caxis
caxis(target,...)
```

Description

`caxis` controls the mapping of data values to the colormap.

`caxis([cmin cmax])` sets the color limits for the current axes or chart returned by the `gca` command. Data values less than `cmin` or greater than `cmax` map to `cmin` and `cmax`, respectively. Values between `cmin` and `cmax` linearly map to the current colormap.

`caxis auto` computes the color limits automatically using the minimum and maximum data values. This is the default behavior. Color values set to `Inf` map to the maximum color, and values set to `-Inf` map to the minimum color. Faces or edges with color values set to `NaN` are not drawn.

`caxis manual` and `caxis(caxis)` freeze the color axis scaling at the current limits. This enables subsequent plots to use the same limits when `hold` is `on`.

`v = caxis` returns a two-element row vector containing the `[cmin cmax]` currently in use.

`caxis(target,...)` uses the axes or chart specified by `target` instead of the current axes or chart.

Input Arguments

target — Target
Axes object | graphics object

Target, specified as an Axes object or a graphics object that has a ColorLimits property. For example, you can set or query the color limits for a HeatmapChart object.

If you do not specify the target, then the caxis function uses the graphics object returned by the gca command.

For Axes objects, caxis changes the CLim and CLimMode properties. It affects any surface, patch, or image with indexed CData and CDataMapping set to scaled. It does not affect surfaces, patches, or images with true color CData or with CDataMapping set to direct.

Examples

Change Color Axis Scaling

Define X, Y, and Z as data for a sphere and view the data as a surface. Define the colors for the surface, C.

```
[X,Y,Z] = sphere;
C = Z;
surf(X,Y,Z,C)
```

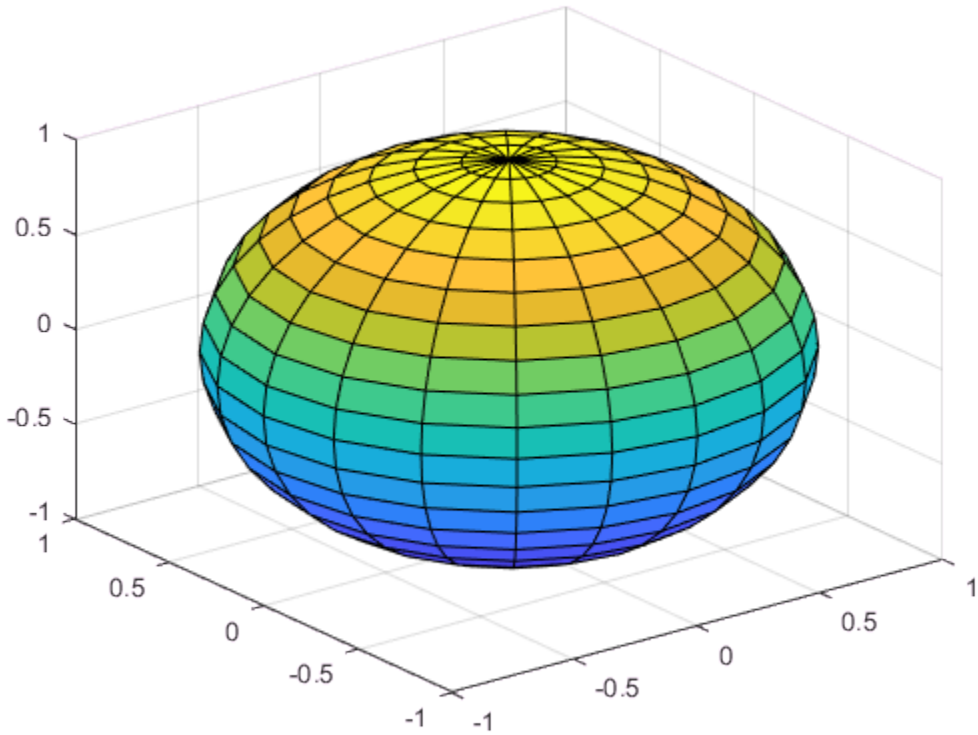

Values of `C` are in the range `[-1,1]`. Values of `C` near -1 are assigned the lowest values in the colormap. Values of `C` near 1 are assigned the highest values in the colormap.

Map the top half of the surface to the highest value in the color table by setting the maximum color limit to 0.

```
caxis([-1,0])
```

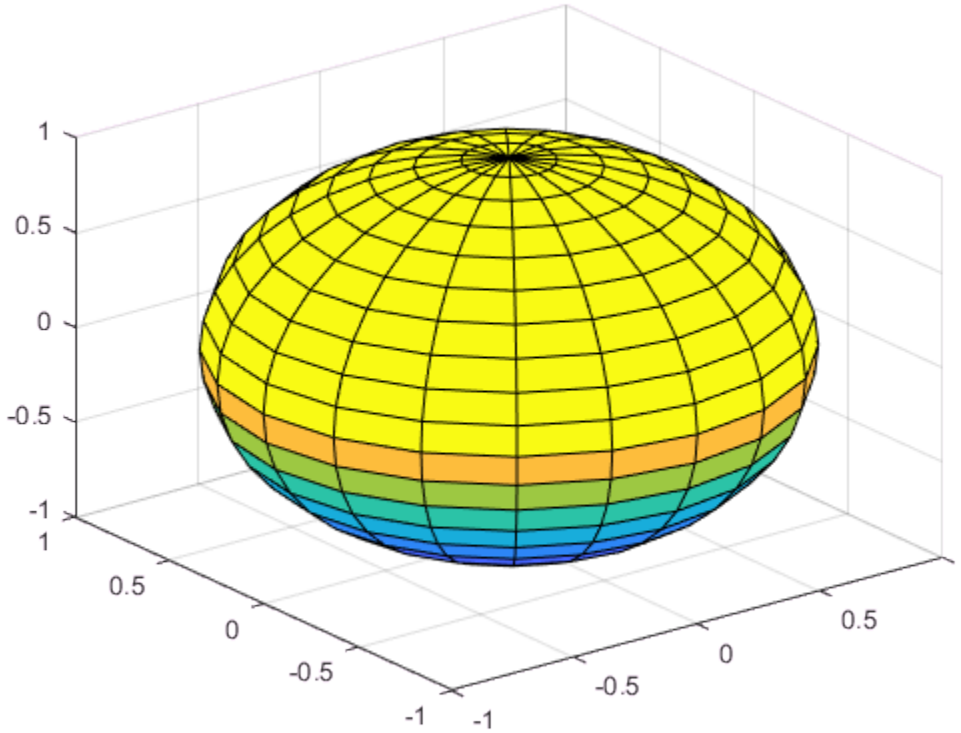

Reset the axis scaling back to its default range.

```
caxis auto
```

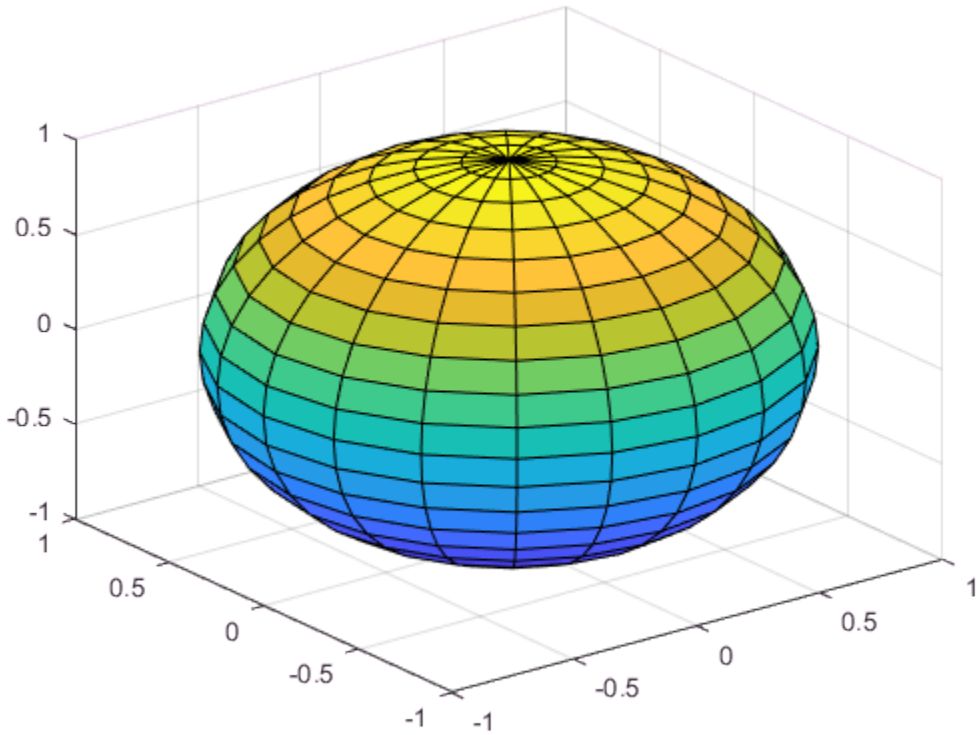

Return the values of the current color limits.

```
v = caxis
```

```
v =

    -1     1
```

Set Color Axis Scaling for Image Data

Load the `cape` file which contains the image data, `X`, and the colormap, `map`, for Cape Cod, Massachusetts.

```
load cape
```

Display the image with `CDataMapping` set to `scaled`, and use the `map` colormap.

```
figure
image(X,'CDataMapping','scaled')
colormap(map)
```

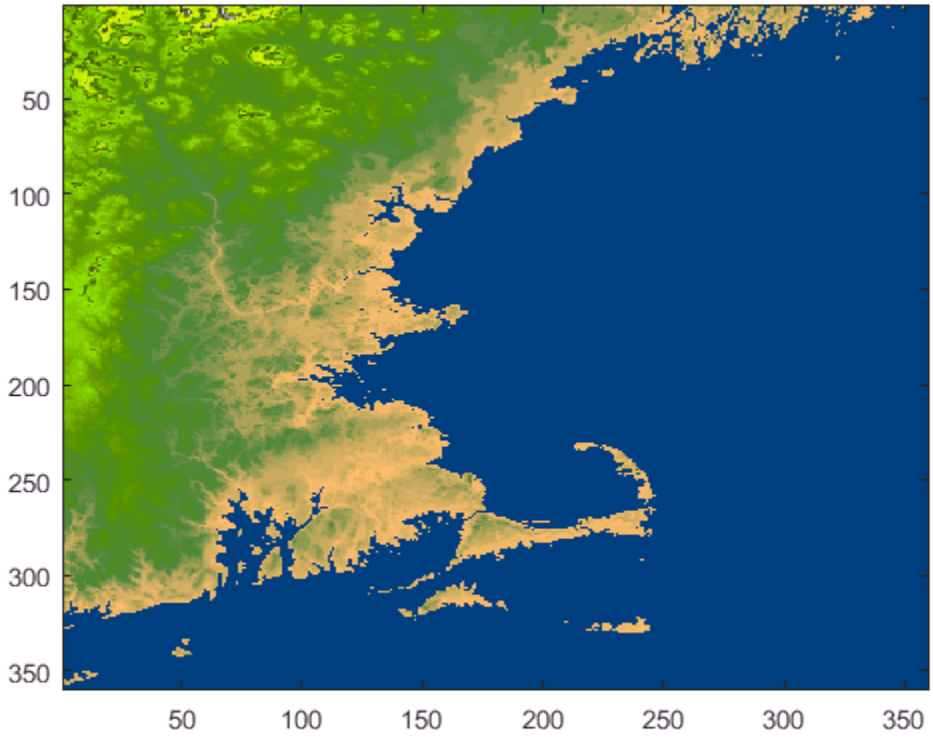

The color limits span the range of the image data, which is 1 to 192. The blue color of the ocean is the first color in the colormap and is mapped to the lowest data value, 1. You can effectively move sea level by changing the lower color limit value using `caxis`.

Display the image data using four different color limit values.

```
load cape
```

```
figure
colormap(map)

subplot(2,2,1)
image(X,'CDataMapping','scaled')
title('caxis = [1 192]')

subplot(2,2,2)
image(X,'CDataMapping','scaled')
caxis([4,192]) % change caxis
title('caxis = [4 192]')

subplot(2,2,3)
image(X,'CDataMapping','scaled')
caxis([7,192]) % change caxis
title('caxis = [7 192]')

subplot(2,2,4)
image(X,'CDataMapping','scaled')
caxis([10,192]) % change caxis
title('caxis = [10 192]')
```

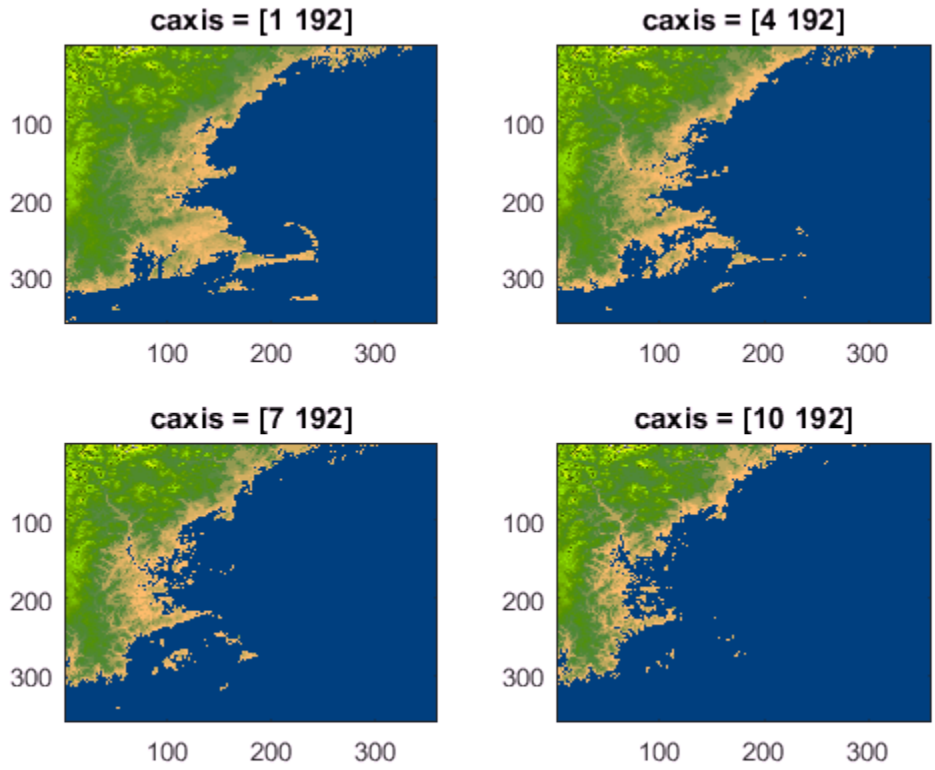

Tips

How Color Axis Scaling Works

Surface, patch, and image graphics objects having indexed `CData` and `CDataMapping` set to `scaled` map `CData` values to colors in the figure colormap each time they render. `CData` values equal to or less than `cmin` map to the first color value in the colormap, and `CData` values equal to or greater than `cmax` map to the last color value in the colormap. The following linear transformation is performed on the intermediate values (referred to

as C below) to map them to an entry in the colormap (whose length is m, and whose row index is referred to as index below).

```
index = fix((C-cmin)/(cmax-cmin)*m)+1;
%Clamp values outside the range [1 m]
index(index<1) = 1;
index(index>m) = m;
```

See Also

axes | axis | colormap | get | mesh | pcolor | set | surf

Introduced before R2006a

cd

Change current folder

Syntax

```
cd
cd newFolder
oldFolder = cd(newFolder)
```

Description

`cd` displays the current folder.

`cd newFolder` changes the current folder to `newFolder`. Folder changes are global. Therefore, if you use `cd` within a function, the folder change persists after MATLAB finishes executing the function.

`oldFolder = cd(newFolder)` returns the existing current folder to `oldFolder`, and then changes the current folder to `newFolder`.

Examples

Change Current Folder Using Full and Relative Paths

Change the current folder to the featured examples folder for MATLAB R2016b, assuming that version is installed on your `C:` drive.

```
cd 'C:\Program Files\MATLAB\R2016b\examples\matlab_featured'
```

Change the current folder from `C:\Program Files\MATLAB\R2016b\examples\matlab_featured` to `C:\Program Files\MATLAB\R2016b`.

```
cd ..\..
```

Use a relative path to change the current folder from `C:\Program Files\MATLAB\R2016b` back to `C:\Program Files\MATLAB\R2016b\examples\matlab_featured`.

```
cd examples\matlab_featured
```

Change and then Restore Current Folder

Change the current folder to a new location, then restore the current folder to its original location.

Change the current folder to the featured examples folder for MATLAB® R2016b, assuming that version is installed on your `C:` drive.

```
cd 'C:\Program Files\MATLAB\R2016b\examples\matlab_featured'
```

Change the current folder to `C:\Program Files`, saving the folder path before changing it.

```
oldFolder = cd('C:\Program Files')
```

```
oldFolder =

    'C:\Program Files\MATLAB\R2016b\examples\matlab_featured'
```

Use the `cd` command to display the new current folder.

```
cd
```

```
C:\Program Files
```

Change the current folder back to the original folder, using the stored path. Use the `cd` command to display the new current folder.

```
cd(oldFolder)
cd
```

```
C:\Program Files\MATLAB\R2016b\examples\matlab_featured
```

Change Current Folder to User Home Folder on UNIX®

Change the current folder to the featured examples folder for MATLAB R2016b, assuming that version is installed in your user home folder on a UNIX platform.

```
cd ~/MATLAB/R2016b/examples/matlab_featured
```

Input Arguments

`newFolder` — Folder path to which you want to change the current folder

character vector

Folder path to which you want to change the current folder, specified as a character vector. Valid values include:

- A full or relative path.
- `../`, which indicates up one level from the current folder.
- Multiples of `../`, which indicates multiple levels up from the current folder.
- `./`, which indicates a path relative to the current folder. `cd` assumes that the path is relative to the current folder even if the `./` is not present.

If `newFolder` contains spaces, enclose it in single quotation marks.

On UNIX® systems, you can use the ~ (tilde) character to represent the user home folder.

Output Arguments

`oldFolder` — Current folder that was in place before you issued the `cd` command

character vector

The current folder that was in place before you issued the `cd` command, specified as a character vector.

Definitions

Current Folder

The current folder is a reference location that MATLAB uses to find files. This folder is sometimes referred to as the *current directory*, *current working folder*, or *present working directory*.

See Also

See Also

`dir` | `pwd` | `what`

Topics

"Specify File Names"
"Files and Folders that MATLAB Accesses"

Introduced before R2006a

convexHull

Class: DelaunayTri

(Not recommended) Convex hull

Note: `convexHull(DelaunayTri)` is not recommended. Use convexHull(delaunayTriangulation) instead.

`DelaunayTri` is not recommended. Use delaunayTriangulation instead.

Syntax

```
K = convexHull(DT)
[K AV] = convexHull(DT)
```

Description

`K = convexHull(DT)` returns the indices into the array of points `DT.X` that correspond to the vertices of the convex hull.

`[K AV] = convexHull(DT)` returns the convex hull and the area or volume bounded by the convex hull.

Input Arguments

`DT`	Delaunay triangulation.

Output Arguments

`K`	If the points lie in 2-D space, `K` is a column vector of length `numf`. Otherwise `K` is a matrix of size `numf`-by-`ndim`, `numf` being the number of

facets in the convex hull, and `ndim` the dimension of the space where the points reside.

AV — The area or volume of the convex hull.

Examples

Example 1

Compute the convex hull of a set of random points located within a unit square in 2-D space.

```
x = rand(10,1)
y = rand(10,1)
dt = DelaunayTri(x,y)
k = convexHull(dt)
plot(dt.X(:,1),dt.X(:,2), '.', 'markersize',10); hold on;
plot(dt.X(k,1),dt.X(k,2), 'r'); hold off;
```

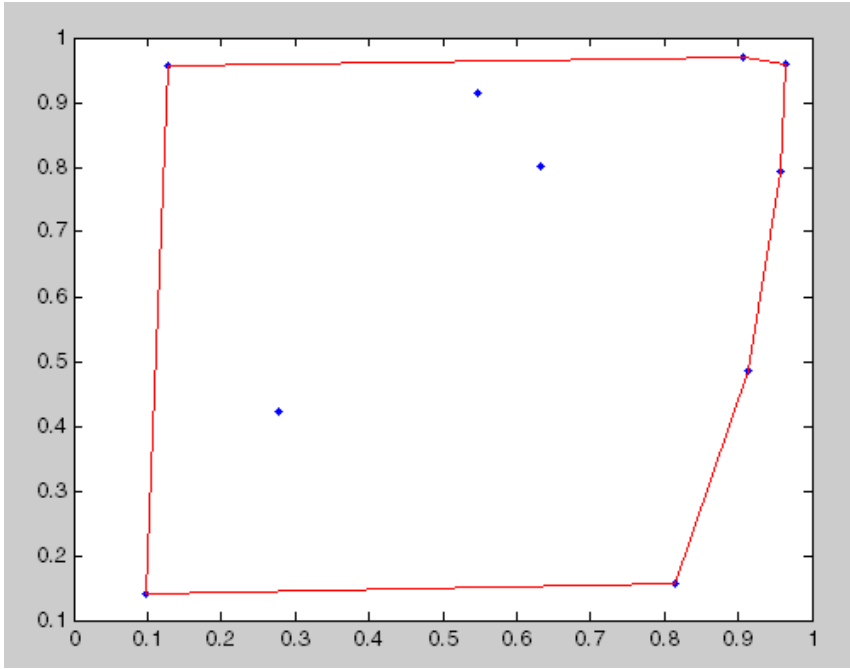

Example 2

Compute the convex hull of a set of random points located within a unit cube in 3-D space, and the volume bounded by the convex hull.

```
X = rand(25,3)
dt = DelaunayTri(X)
[ch v] = convexHull(dt)
trisurf(ch, dt.X(:,1),dt.X(:,2),dt.X(:,3), 'FaceColor', 'cyan')
```

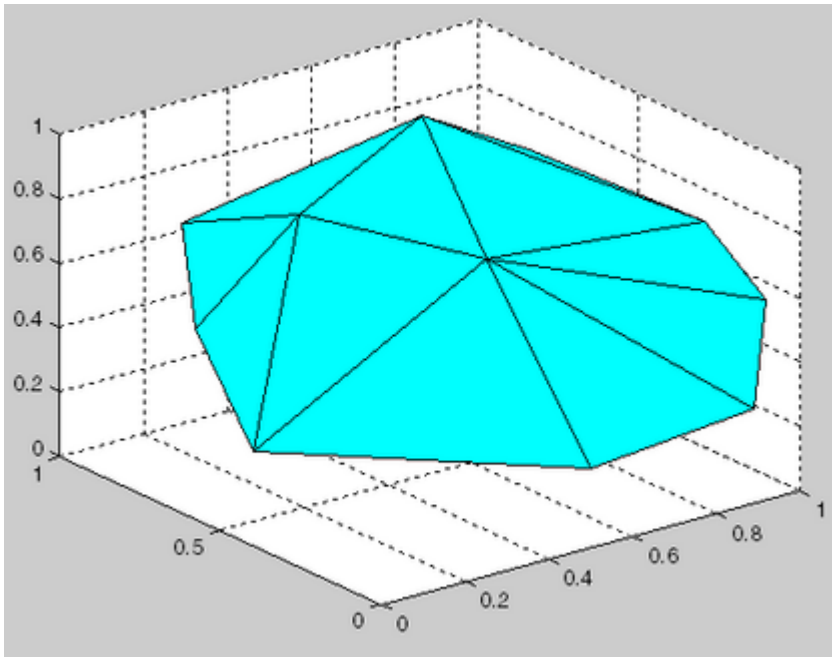

Definitions

Convex Hull

The convex hull of a set of points X is the smallest convex region containing all of the points of X.

See Also

delaunayTriangulation | voronoiDiagram | triangulation | `convhull` | `convhulln`

cd

Class: FTP

Change or view current folder on FTP server

Syntax

```
cd(ftpobj,folder)
cd(ftpobj)
```

Description

`cd(ftpobj,folder)` changes the current folder on the FTP server.

`cd(ftpobj)` displays the current folder on the server.

Input Arguments

ftpobj

FTP object created by ftp.

folder

Character vector enclosed in single quotation marks that specifies the target folder. To specify the folder above the current one, use `'..'`.

Examples

Connect to the National Geophysical Data Center (NGDC) FTP server, change to the `pub` folder, and view its contents:

```
ngdc = ftp('ftp.ngdc.noaa.gov');
cd(ngdc,'pub');
dir(ngdc)
```

FTP service courtesy of the NGDC. See NGDC Privacy Policy, Disclaimer, and Copyright for NGDC terms of service.

See Also

dir | ftp

Introduced before R2006a

cdf2rdf

Convert complex diagonal form to real block diagonal form

Syntax

```
[V,D] = cdf2rdf(V,D)
```

Description

If the eigensystem `[V,D] = eig(X)` has complex eigenvalues appearing in complex-conjugate pairs, `cdf2rdf` transforms the system so `D` is in real diagonal form, with 2-by-2 real blocks along the diagonal replacing the complex pairs originally there. The eigenvectors are transformed so that

```
X = V*D/V
```

continues to hold. The individual columns of `V` are no longer eigenvectors, but each pair of vectors associated with a 2-by-2 block in `D` spans the corresponding invariant vectors.

Examples

The matrix

```
X =
    1     2     3
    0     4     5
    0    -5     4
```

has a pair of complex eigenvalues.

```
[V,D] = eig(X)

V =

    1.0000      -0.0191 - 0.4002i     -0.0191 + 0.4002i
         0            0 - 0.6479i           0 + 0.6479i
         0       0.6479                 0.6479
```

```
D =

    1.0000            0                       0
         0       4.0000 + 5.0000i             0
         0            0                 4.0000 - 5.0000i
```

Converting this to real block diagonal form produces

```
[V,D] = cdf2rdf(V,D)

V =

    1.0000    -0.0191     -0.4002
         0          0     -0.6479
         0     0.6479           0

D =

    1.0000          0           0
         0     4.0000      5.0000
         0    -5.0000      4.0000
```

Algorithms

The real diagonal form for the eigenvalues is obtained from the complex form using a specially constructed similarity transformation.

See Also

`eig` | `rsf2csf`

Introduced before R2006a

cdfepoch

Convert date text or serial date number to CDF formatted dates

Syntax

```
E = cdfepoch(date)
```

Description

`E = cdfepoch(date)` converts the date, specified by `date`, into a `cdfepoch` object. `date` must be valid date value represented by text, as returned by `datestr`, or a serial date number, returned by `datenum`. `date` can also be a `cdfepoch` object.

When writing data to a CDF file using `cdfwrite`, use `cdfepoch` to convert MATLAB dates or serial date numbers to CDF formatted dates. The MATLAB `cdfepoch` object simulates the `CDFEPOCH` data type in CDF files.

To convert a `cdfepoch` object into a MATLAB serial date number, use the `todatenum` function.

Examples

Convert the current time in serial date number format into a CDF epoch object.

```
% NOW function returns current time as serial date number
dateobj = cdfepoch(now)

dateobj =

     cdfepoch object:
     11-Mar-2009 15:09:25
```

Convert the current time, which is returned by `datestr` in text form, into a CDF epoch object.

```
% DATESTR function returns text representing a date
```

```
dateobj2 = cdfepoch(datestr(now))

dateobj2 =

     cdfepoch object:
     11-Mar-2009 15:09:25
```

Convert the CDF epoch object into a serial date number.

```
dateobj = cdfepoch(now);
mydatenum = todatenum(dateobj)

mydatenum =

     7.3384e+005
```

Definitions

MATLAB Serial Date Number

A MATLAB serial date number represents the whole and fractional number of days from 0-Jan-0000 to a specific date. The year 0000 is merely a reference point and is not intended to be interpreted as a real year in time. The MATLAB serial date number calculates dates differently than CDF epochs.

CDF Epoch

A CDF epoch is the number of milliseconds since 1-Jan-0000.

See Also

`datenum` | `datestr` | `todatenum` | `cdfinfo` | `cdfread` | `datetime`

Introduced before R2006a

cdfinfo

Information about Common Data Format (CDF) file

Syntax

```
info = cdfinfo(filename)
```

Description

`info = cdfinfo(filename)` returns information about the Common Data Format (CDF) file specified by the character vector `filename`.

Note Because `cdfinfo` creates temporary files, the current working directory must be writeable.

The following table lists the fields returned in the structure, `info`. The table lists the fields in the order that they appear in the structure.

Field	Description
`Filename`	Character vector specifying the name of the file
`FileModDate`	Character vector indicating the date the file was last modified
`FileSize`	Double scalar specifying the size of the file, in bytes
`Format`	Character vector specifying the file format
`FormatVersion`	Character vector specifying the version of the CDF library used to create the file
`FileSettings`	Structure array containing library settings used to create the file
`Subfiles`	Filenames containing the CDF file's data, if it is a multi-file format CDF

Field	Description	
`Variables`	N-by-6 cell array, where N is the number of variables, containing information about the variables in the file. The columns present the following information:	
	Column 1	Character vector specifying name of variable
	Column 2	Double array specifying the dimensions of the variable, as returned by the `size` function
	Column 3	Double scalar specifying the number of records assigned for the variable
	Column 4	Character vector specifying the data type of the variable, as stored in the CDF file

	Column 5	Character vector specifying the record and dimension variance settings for the variable. The single `T` or `F` to the left of the slash designates whether values vary by record. The zero or more `T` or `F` letters to the right of the slash designate whether values vary at each dimension. Here are some examples.
		`T/  (scalar variable`
		`F/T (one-dimensional variable)`
		T/TFF (three-dimensional variable)

`GlobalAttributes`	Structure array that contains one field for each global attribute. The name of each field corresponds to the name of an attribute. The data in each field, contained in a cell array, represents the entry values for that attribute.	
`VariableAttributes`	Structure array that contains one field for each variable attribute. The name of each field corresponds to the name of an attribute. The data in each field is contained in a *n*-by-2 cell array, where *n* is the number of variables. The first column of this cell array contains the variable names associated with the entries. The second column contains the entry values.	

Note Attribute names returned by `cdfinfo` might not match the names of the attributes in the CDF file exactly. Attribute names can contain characters that are illegal in

MATLAB field names. `cdfinfo` removes illegal characters that appear at the beginning of attributes and replaces other illegal characters with underscores ('_'). When `cdfinfo` modifies an attribute name, it appends the attribute's internal number to the end of the field name. For example, the attribute name `Variable%Attribute` becomes `Variable_Attribute_013`.

Note: To improve performance, turn off the file validation which the CDF library does by default when opening files. For more information, see `cdflib.setValidate`.

Examples

Get Information About CDF File

Get information about the sample file, `example.cdf`.

```
info = cdfinfo('example.cdf')
```

```
info = struct with fields:
              Filename: 'example.cdf'
           FileModDate: '10-May-2010 21:35:00'
              FileSize: 1310
                Format: 'CDF'
         FormatVersion: '2.7.0'
          FileSettings: [1×1 struct]
              Subfiles: {}
             Variables: {6×6 cell}
      GlobalAttributes: [1×1 struct]
    VariableAttributes: [1×1 struct]
```

View information about the variables in the file.

```
info.Variables
```

```
ans = 6×6 cell array
    'Time'                [1×2 double]    [24]    'epoch'     'T/'        'Full'
    'Longitude'           [1×2 double]    [ 1]    'int8'      'F/FT'      'Full'
    'Latitude'            [1×2 double]    [ 1]    'int8'      'F/TF'      'Full'
    'Data'                [1×3 double]    [ 1]    'double'    'T/TTT'     'Full'
    'multidimensional'    [1×4 double]    [ 1]    'uint8'     'T/TTTT'    'Full'
    'Temperature'         [1×2 double]    [10]    'int16'     'T/TT'      'Full'
```

See Also

`cdflib.setValidate` | `cdfread`

Introduced before R2006a

cdflib

Interact directly with CDF library

Description

MATLAB provides direct access to dozens of functions in the CDF library. Using these functions, you can read and write data, create variables, attributes, and entries, and take advantage of other features of the CDF library. To use these functions, you must be familiar with the CDF C interface. Documentation about CDF is available at the CDF website.

The MATLAB functions correspond to functions in the CDF library new Standard Interface. In most cases, the syntax of a MATLAB function is similar to the syntax of the corresponding CDF library function. To use these functions, you must prefix the function name with the package name, `cdflib`. For example, to use the CDF library function to open an existing CDF file, use this syntax:

```
cdfid = cdflib.open('example.cdf');
```

MATLAB supports CDF version 3.6.1. For copyright information, see the `cdfcopyright.txt` file.

The following tables list all of the functions in the MATLAB CDF library package, grouped by category.

Note: For information about MATLAB support for the Network Common Data Form (netCDF), which is a completely separate, incompatible format, see `netcdf`.

Library Information

cdflib.getConstantNames	Names of Common Data Format (CDF) library constants
cdflib.getConstantValue	Numeric value corresponding to Common Data Format (CDF) library constant
cdflib.getFileBackward	Return current backward compatibility mode setting

cdflib.getLibraryCopyright	Copyright notice of Common Data Format (CDF) library
cdflib.getLibraryVersion	Library version and release information
cdflib.getValidate	Library validation mode
cdflib.setFileBackward	Set backward compatibility mode
cdflib.setValidate	Specify library validation mode

File Operations

cdflib.close	Close Common Data Format (CDF) file
cdflib.create	Create Common Data Format (CDF) file
cdflib.delete	Delete existing Common Data Format (CDF) file
cdflib.getCacheSize	Number of cache buffers used
cdflib.getChecksum	Checksum mode
cdflib.getCompression	Compression settings
cdflib.getCompressionCacheSize	Number of compression cache buffers
cdflib.getCopyright	Copyright notice in Common Data Format (CDF) file
cdflib.getFormat	Format of Common Data Format (CDF) file
cdflib.getMajority	Majority of variables
cdflib.getName	Name of Common Data Format (CDF) file
cdflib.getReadOnlyMode	Read-only mode
cdflib.getStageCacheSize	Number of cache buffers for staging
cdflib.getVersion	Common Data Format (CDF) library version and release information
cdflib.inquire	Basic characteristics of Common Data Format (CDF) file
cdflib.open	Open existing Common Data Format (CDF) file
cdflib.setCacheSize	Specify number of dotCDF cache buffers
cdflib.setChecksum	Specify checksum mode

cdflib.setCompression	Specify compression settings
cdflib.setCompressionCacheSize	Specify number of compression cache buffers
cdflib.setFormat	Specify format of Common Data Format (CDF) file
cdflib.setMajority	Specify majority of variables
cdflib.setReadOnlyMode	Specify read-only mode
cdflib.setStageCacheSize	Specify number of staging cache buffers for Common Data Format (CDF) file

Variables

cdflib.closeVar	Close specified variable from multifile format Common Data Format (CDF) file
cdflib.createVar	Create new variable
cdflib.deleteVar	Delete variable
cdflib.deleteVarRecords	Delete range of records from variable
cdflib.getVarAllocRecords	Number of records allocated for variable
cdflib.getVarBlockingFactor	Blocking factor for variable
cdflib.getVarCacheSize	Number of multifile cache buffers
cdflib.getVarCompression	Information about compression used by variable
cdflib.getVarData	Single value from record in variable
cdflib.getVarMaxAllocRecNum	Maximum allocated record number for variable
cdflib.getVarMaxWrittenRecNum	Maximum written record number for variable
cdflib.getVarsMaxWrittenRecNum	Maximum written record number for CDF file
cdflib.getVarName	Variable name, given variable number
cdflib.getVarNum	Variable number, given variable name
cdflib.getVarNumRecsWritten	Number of records written to variable

cdflib.getVarPadValue	Pad value for variable
cdflib.getVarRecordData	Entire record for variable
cdflib.getVarReservePercent	Compression reserve percentage for variable
cdflib.getVarSparseRecords	Information about how variable handles sparse records
cdflib.hyperGetVarData	Read hyperslab of data from variable
cdflib.hyperPutVarData	Write hyperslab of data to variable
cdflib.inquireVar	Information about variable
cdflib.putVarData	Write single value to variable
cdflib.putVarRecordData	Write entire record to variable
cdflib.renameVar	Rename existing variable
cdflib.setVarAllocBlockRecords	Specify range of records to be allocated for variable
cdflib.setVarBlockingFactor	Specify blocking factor for variable
cdflib.setVarCacheSize	Specify number of multi-file cache buffers for variable
cdflib.setVarCompression	Specify compression settings used with variable
cdflib.setVarInitialRecs	Specify initial number of records written to variable
cdflib.setVarPadValue	Specify pad value used with variable
cdflib.SetVarReservePercent	Specify reserve percentage for variable
cdflib.setVarsCacheSize	Specify number of cache buffers used for all variables
cdflib.setVarSparseRecords	Specify how variable handles sparse records

Attributes

cdflib.createAttr	Create attribute
cdflib.deleteAttr	Delete attribute

cdflib.deleteAttrEntry	Delete attribute entry
cdflib.deleteAttrgEntry	Delete entry in global attribute
cdflib.getAttrEntry	Value of entry in attribute with variable scope
cdflib.getAttrgEntry	Value of entry in global attribute
cdflib.getAttrMaxEntry	Number of last entry for variable attribute
cdflib.getAttrMaxgEntry	Number of last entry for global attribute
cdflib.getAttrName	Name of attribute, given attribute number
cdflib.getAttrNum	Attribute number, given attribute name
cdflib.getAttrScope	Scope of attribute
cdflib.getNumAttrEntries	Number of entries for attribute with variable scope
cdflib.getNumAttrgEntries	Number of entries for attribute with global scope
cdflib.getNumAttributes	Number of attributes with variable scope
cdflib.getNumgAttributes	Number of attributes with global scope
cdflib.inquireAttr	Information about attribute
cdflib.inquireAttrEntry	Information about entry in attribute with variable scope
cdflib.inquireAttrgEntry	Information about entry in attribute with global scope
cdflib.putAttrEntry	Write value to entry in attribute with variable scope
cdflib.putAttrgEntry	Write value to entry in attribute with global scope
cdflib.renameAttr	Rename existing attribute

Utility Functions

cdflib.computeEpoch	Convert time value to `CDF_EPOCH` value
cdflib.computeEpoch16	Convert time value to `CDF_EPOCH16` value
cdflib.epoch16Breakdown	Convert `CDF_EPOCH16` value to time value

cdflib.epochBreakdown	Convert `CDF_EPOCH` value into time value

Limitations

- CDF files do not support non-ASCII encoded inputs. Variable names, attributes names, variable values, and attribute values must have 7-bit ASCII encoding. Attempting to write non-ASCII encoded inputs results in an error or data with corrupted characters.

See Also

`cdfread` | `cdfinfo`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.close

Close Common Data Format (CDF) file

Syntax

```
cdflib.close(cdfId)
```

Description

`cdflib.close(cdfId)` closes the specified CDF file. `cdfId` identifies the CDF file.

You must close a CDF to guarantee that all modifications you made since opening the CDF are actually written to the file.

Examples

Open the example CDF file and then close it.

```
cdfid = cdflib.open('example.cdf');
cdflib.close(cdfid)
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFcloseCDF`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.open` | `cdflib.create`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.closeVar

Close specified variable from multifile format Common Data Format (CDF) file

Syntax

```
cdflib.closeVar(cdfId,varNum)
```

Description

`cdflib.closeVar(cdfId,varNum)` closes a variable in a multifile format CDF.

`cdfId` identifies the CDF file and `varNum` is a numeric value that specifies the variable. Variable identifiers (variable numbers) are zero-based.

For multifile CDFs, you must close all open variable files to guarantee that all modifications you have made are actually written to the CDF file(s). You do not need to call this function for variables in a single-file format CDF.

Examples

Create a multifile CDF, create a variable, and then close the variable. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_multifile.cdf');

% Make it a multifile format CDF
cdflib.setFormat(cdfid,'MULTI_FILE')

% Create a variable in the CDF.
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);

%  Close the variable.
cdflib.closeVar(cdfid, varnum)

% Clean up
cdflib.delete(cdfid)
clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFclosezVar`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarNum` | `cdflib.setFormat` | `cdflib.getFormat`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.computeEpoch

Convert time value to CDF_EPOCH value

Syntax

```
epoch = cdflib.computeEpoch(timeval)
```

Description

`epoch = cdflib.computeEpoch(timeval)` converts the time value specified by `timeval` into a CDF_EPOCH value.

Input Arguments

timeval

7-by-1 time vector. The following table describes the time components.

Component	Description
year	AD e.g. 1994
month	1–12
day	1–31
hour	0–23
minute	0–59
second	0–59
millisecond	0–999

Output Arguments

epoch

MATLAB `double` representing a CDF_EPOCH time value.

Examples

Convert a time value into a `CDF_EPOCH` value.

```
timeval = [1999 12 31 23 59 59 0];
epoch = cdflib.computeEpoch(timeval);
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `computeEPOCH`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.computeEpoch16` | `cdflib.epochBreakdown` | `cdflib.epoch16Breakdown`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.computeEpoch16

Convert time value to `CDF_EPOCH16` value

Syntax

```
epoch16 = cdflib.computeEpoch16(timeval)
```

Description

`epoch16 = cdflib.computeEpoch16(timeval)` converts the time value specified by `timeval` into a `CDF_EPOCH16` value.

Input Arguments

`timeval`

10-by-1 time vector. The following table describes the time components. To specify multiple time values, use additional columns.

Component	Description
year	AD e.g. 1994
month	1–12
day	1–31
hour	0–23
minute	0–59
second	0–59
millisecond	0–999
microsecond	0–999
nanosecond	0–999
picosecond	0–999

Output Arguments

epoch16

CDF Epoch16 time value. If the input argument `timeval` has `m-by-10` elements, the return value `epoch16` will have size `2-by-m`

Examples

Convert the time value into an `CDF_EPOCH16` value:

```
timeval = [1999; 12; 31; 23; 59; 59; 50; 100; 500; 999];
epoch16 = cdflib.computeEpoch16(timeval);
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `computeEPOCH16`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.computeEpoch` | `cdflib.epochBreakdown` | `cdflib.epoch16Breakdown`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.create

Create Common Data Format (CDF) file

Syntax

```
cdfId = cdflib.create(filename)
```

Description

`cdfId = cdflib.create(filename)` creates a new CDF file with the name specified by the character vector *`filename`*. Returns the CDF file identifier `cdfId`.

Examples

Create a CDF file. To run this example, you must have write permission in your current directory.

```
cdfId = cdflib.create('myfile.cdf');

% Clean up
cdflib.delete(cdfId);

clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFcreateCDF`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.open` | `cdflib.close`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.createAttr

Create attribute

Syntax

```
attrnum = cdflib.createAttr(cdfId,attrName,scope)
```

Description

`attrnum = cdflib.createAttr(cdfId,attrName,scope)` creates an attribute in a CDF file with the specified scope.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

attrName

Character vector that specifies the name you want to assign to the attribute.

scope

One of the following character vectors, or its numeric equivalent, that specifies the scope of the attribute.

Value	Description
`'global_scope'`	Attribute applies to the CDF as a whole.
`'variable_scope'`	Attribute applies only to the variable

To get the numeric equivalent of these constants, use the `cdflib.getConstantValue` function.

Output Arguments

attrNum

Numeric value identifying the attribute. Attribute numbers are zero-based.

Examples

Create a CDF, and then create an attribute in the CDF. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create attribute
attrNum = cdflib.createAttr(cdfId,'Purpose','global_scope');

% Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFcreateAttr`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getAttrNum` | `cdflib.deleteAttr` | `cdflib.getConstantValue` | `cdflib.getConstantNames`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.createVar

Create new variable

Syntax

```
varnum = cdflib.createVar(cdfId, varname, datatype, numElements,
dims, recVariance, dimVariance)
```

Description

`varnum = cdflib.createVar(cdfId, varname, datatype, numElements, dims, recVariance, dimVariance)` creates a new variable in the Common Data Format (CDF) file with the specified characteristics.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

varname

Character vector that specifies the name you want to assign to the variable.

datatype

Data type of the variable. One of the following character vectors, or its numeric equivalent, that specifies a valid CDF data type.

CDF Data Type	Description
`'CDF_BYTE`	1-byte, signed integer
`'CDF_CHAR'`	1 byte, signed character data type that maps to the MATLAB `char` class
`'CDF_INT1'`	1-byte, signed integer

CDF Data Type	Description
`'CDF_UCHAR'`	1 byte, unsigned character data type that maps to the MATLAB `uint8` class
`'CDF_UINT1'`	1-byte, unsigned integer
`'CDF_INT2'`	2-byte, signed integer
`'CDF_UINT2'`	2-byte, unsigned integer
`'CDF_INT4'`	4-byte, signed integer
`'CDF_UINT4'`	4-byte, unsigned integer
`'CDF_FLOAT'`	4-byte, floating point
`'CDF_REAL4'`	4-byte, floating point
`'CDF_REAL8'`	8-byte, floating point.
`'CDF_DOUBLE'`	8-byte, floating point
`'CDF_EPOCH'`	8-byte, floating point
`'CDF_EPOCH16'`	two 8-byte, floating point

`numElements`

Number of elements per datum. Value should be 1 for all data types, except for `'CDF_CHAR'` and `'CDF_UCHAR'`.

`dims`

A vector of the dimensions extents; empty if there are no dimension extents.

`recVariance`

Specifies record variance: `true` or `false`.

`dimVariance`

A vector of logicals; empty if there are no dimensions.

Output Arguments

`varNum`

The numeric identifier for the variable. Variable numbers are zero-based.

Examples

Create a CDF file and then create a variable named `'Time'` in the CDF. The variable has no dimensions and varies across records. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Initially the file contains no variables.
info = cdflib.inquire(cdfid)

info =

     encoding: 'IBMPC_ENCODING'
     majority: 'ROW_MAJOR'
       maxRec: -1
      numVars: 0
    numvAttrs: 0
    numgAttrs: 0

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);

% Retrieve info about the file again to verify variable was created.
% Note value of numVars field is now 1.
info = cdflib.inquire(cdfid)

info =

     encoding: 'IBMPC_ENCODING'
     majority: 'ROW_MAJOR'
       maxRec: -1
      numVars: 1
    numvAttrs: 0
    numgAttrs: 0

% Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFcreatezVar`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.deleteVar` | `cdflib.closeVar`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.delete

Delete existing Common Data Format (CDF) file

Syntax

```
cdflib.delete(cdfId)
```

Description

`cdflib.delete(cdfId)` deletes the existing CDF file specified by the identifier `cdfId`. If the CDF file is a multi-file format CDF, the `cdflib.delete` function also deletes the variable files (having file extensions of `.z0`, `.z1`, etc.).

Examples

Create a CDF file, and then delete it. To run this example, you must be in a writable folder.

```
cdfId = cdflib.create('mytempfile.cdf');

% Verify that the file was created.
ls *.cdf

mytempfile.cdf

% Delete the file.
cdflib.delete(cdfId)

% Verify that the file no longer exists.
ls *.cdf
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFdeleteCDF`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.create` | `cdflib.setFormat`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.deleteAttr

Delete attribute

Syntax

```
cdflib.deleteAttr(cdfId,attrNum)
```

Description

`cdflib.deleteAttr(cdfId,attrNum)` deletes the specified attribute from the CDF file.

`cdfId` identifies the Common Data Format (CDF) file.`attrNum` is a numeric identifier that specifies the attribute. Attribute numbers are zero-based.

Examples

Create a CDF file, and then create an attribute in the file. Then delete the attribute. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create attribute.
attrNum = cdflib.createAttr(cdfId,'Purpose','global_scope');

% Prove it exists.
anum = cdflib.getAttrNum(cdfid,'Purpose')

anum =

     0

% Delete the attribute.
cdflib.deleteAttr(cdfid,attrNum);


% Clean up
```

```
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFdeleteAttr`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.createAttr` | `cdflib.getAttrNum`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.deleteAttrEntry

Delete attribute entry

Syntax

```
cdflib.deleteAttrEntry(cdfId,attrNum,entryNum)
```

Description

`cdflib.deleteAttrEntry(cdfId,attrNum,entryNum)` deletes an entry from an attribute in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`attrNum`

Numeric value that identifies the attribute. Attribute numbers are zero-based. The attribute must have variable scope.

`entryNum`

Numeric value that specifies the entry in the attribute. Entry numbers are zero-based.

Examples

Create a CDF, and then create an attribute in the file. Write a value to an entry for the attribute, and then delete the entry. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Initially the file contains no attributes, global or variable.
```

```
info = cdflib.inquire(cdfid)

info =

     encoding: 'IBMPC_ENCODING'
     majority: 'ROW_MAJOR'
       maxRec: -1
      numVars: 0
    numvAttrs: 0
    numgAttrs: 0

% Create an attribute with variable scope in the file.
attrNum = cdflib.createAttr(cdfid,'my_var_scope_attr','variable_scope');

% Write a value to an entry for the attribute
cdflib.putAttrEntry(cdfid,attrNum,0,'CDF_CHAR','My attr value');

% Get the value of the attribute entry
value = cdflib.getAttrEntry(cdfid,attrNum,0)

value =

My attr value

% Delete the entry
cdflib.deleteAttrEntry(cdfid,attrNum,0);

% Now try to view the value of the entry
% Should return NO_SUCH_ENTRY failure.
value = cdflib.getAttrEntry(cdfid,attrNum,0)  % Should fail

% Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFdeleteAttrzEntry`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.deleteAttr`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.deleteAttrgEntry

Delete entry in global attribute

Syntax

```
cdflib.deleteAttrgEntry(cdfId,attrNum,entryNum)
```

Description

`cdflib.deleteAttrgEntry(cdfId,attrNum,entryNum)` deletes an entry from a global attribute in a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

attrNum

Numeric value that identifies the attribute. Attribute numbers are zero-based. The attribute must have global scope.

entryNum

Numeric value that specifies the entry in the attribute. Entry numbers are zero-based.

Examples

Create a CDF and create a global attribute in the file. Write a value to an entry for the attribute and then delete the entry. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Initially the file contains no attributes, global or variable.
```

```
info = cdflib.inquire(cdfid)

info =

     encoding: 'IBMPC_ENCODING'
     majority: 'ROW_MAJOR'
       maxRec: -1
      numVars: 0
    numvAttrs: 0
    numgAttrs: 0

% Create an attribute with global scope in the file.
attrNum = cdflib.createAttr(cdfid,'my_global_attr','global_scope');

% Write a value to an entry for the attribute
cdflib.putAttrgEntry(cdfid,attrNum,0,'CDF_CHAR','My global attr');

% Get the value of the global attribute entry
value = cdflib.getAttrgEntry(cdfid,attrNum,0)

value =

My global attr

% Delete the entry
cdflib.deleteAttrgEntry(cdfid,attrNum,0);

% Now try to view the value of the entry
% Should return NO_SUCH_ENTRY failure.
value = cdflib.getAttrgEntry(cdfid,attrNum,0)  % Should fail

% Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFdeleteAttrgEntry`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.deleteAttr` | `cdflib.deleteAttrEntry`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.deleteVar

Delete variable

Syntax

```
cdflib.deleteVar(cdfId,varNum)
```

Description

`cdflib.deleteVar(cdfId,varNum)` deletes a variable from a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `varNum` is a numeric value that specifies the variable. Variable numbers are zero-based.

Examples

Create a CDF, create a variable in the CDF, and then delete it.

```
cdfid = cdflib.create('mycdf.cdf');

% Initially the file contains no variables.
info = cdflib.inquire(cdfid)

info =

     encoding: 'IBMPC_ENCODING'
     majority: 'ROW_MAJOR'
       maxRec: -1
      numVars: 0
    numvAttrs: 0
    numgAttrs: 0

% Create a variable in the CDF.
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);
```

```
% Retrieve info about the variable in the CDF.

info = cdflib.inquireVar(cdfid, 0)

info =

           name: 'Time'
       datatype: 'cdf_int1'
    numElements: 1
           dims: []
    recVariance: 1
    dimVariance: []

% Delete the variable from the CDF

cdflib.deleteVar(cdfid,0);

% Check to see if the variable was deleted from the CDF.
info = cdflib.inquire(cdfid)

info =

     encoding: 'IBMPC_ENCODING'
     majority: 'ROW_MAJOR'
       maxRec: -1
      numVars: 0
    numvAttrs: 0
    numgAttrs: 0

% Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFdeletezVar`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.createVar`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.deleteVarRecords

Delete range of records from variable

Syntax

```
cdflib.deleteVarRecords(cdfId,varNum,startRec,endRec)
```

Description

`cdflib.deleteVarRecords(cdfId,varNum,startRec,endRec)` deletes a range of records from a variable in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value that identifies the variable. Variable numbers are zero-based.

`startRec`

Numeric value that specifies the record at which to start deleting records. Record numbers are zero-based.

`endRec`

Numeric value that specifies the record at which to stop deleting records. Record numbers are zero-based.

Examples

Make a writable copy of the example CDF, get the number of a variable in the CDF, and delete specific records in the variable. To run this example, you must be in a writable folder.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.cdf');
copyfile(srcFile,'myfile.cdf');
fileattrib('myfile.cdf','+w');
cdfid = cdflib.open('myfile.cdf');
varnum = cdflib.getVarNum(cdfid,'Temperature');
cdflib.deleteVarRecords(cdfid,varnum,1,2);
cdflib.close(cdfid);
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFdeletezVarRecords`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarNumRecsWritten` | `cdflib.putVarRecordData`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.epoch16Breakdown

Convert `CDF_EPOCH16` value to time value

Syntax

```
timeVec = cdflib.epoch16Breakdown(epoch16Time)
```

Description

`timeVec = cdflib.epoch16Breakdown(epoch16Time)` convert a `CDF_EPOCH16` value into a time vector. `timeVec` will have 10-by-*n* elements, where *n* is the number of CDF_EPOCH16 values.

The following table describes the time value components.

timeVec Element	Description	Valid Values
`timeVec(1,:)`	Year AD	e.g. 1994
`timeVec(2,:)`	Month	1–12
`timeVec(3,:)`	Day	1–31
`timeVec(4,:)`	Hour	0–23
`timeVec(5,:)`	Minute	0–59
`timeVec(6,:)`	Second	0–59
`timeVec(7,:)`	Millisecond	0–999
`timeVec(8,:)`	Microsecond	0–999
`timeVec(9,:)`	Nanosecond	0–999
`timeVec(10,:)`	Picosecond	0–999

Examples

Convert `CDF_EPOCH16` value into time value.

```
timeval = [1999; 12; 31; 23; 59; 59; 50; 100; 500; 999];
epoch16 = cdflib.computeEpoch16(timeval);

timevec = cdflib.epoch16Breakdown(epoch16)

timevec =

        1999
          12
          31
          23
          59
          59
          50
         100
         500
         999
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `EPOCH16breakdown`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.computeEpoch16`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.epochBreakdown

Convert CDF_EPOCH value into time value

Syntax

```
timeVec = cdflib.epochBreakdown(epochTime)
```

Description

`timeVec = cdflib.epochBreakdown(epochTime)` decomposes the CDF_EPOCH value, `epochTime` value into individual time components. `timeVec` will have 7-by-n elements, where n is the number of CDF_EPOCH values in `epochTime`.

The return value `timeVec` has the following elements:

timeVec Element	Description	Valid Values
`timeVec(1,:)`	Year AD	e.g. 1994
`timeVec(2,:)`	Month	1–12
`timeVec(3,:)`	Day	1–31
`timeVec(4,:)`	Hour	0–23
`timeVec(5,:)`	Minute	0–59
`timeVec(6,:)`	Second	0–59
`timeVec(7,:)`	Millisecond	0–999

Examples

Convert a CDP_EPOCH value into a time vector.

```
% First convert a time vector into a CDF_EPOCH value
timeval = [1999 12 31 23 59 59 0];
epoch = cdflib.computeEpoch(timeval);
```

```
% Convert the CDF_EPOCH value into a time vector
timevec = cdflib.epochBreakdown(epoch)

timevec =

        1999
          12
          31
          23
          59
          59
           0
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `EPOCHbreakdown`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.computeEpoch` | `cdflib.epochBreakdown` | `cdflib.epoch16Breakdown`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getAttrEntry

Value of entry in attribute with variable scope

Syntax

```
value = cdflib.getAttrEntry(cdfId,attrNum,entryNum)
```

Description

`value = cdflib.getAttrEntry(cdfId,attrNum,entryNum)` returns the value of an attribute entry in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`attrNum`

Numeric value that identifies the attribute. Attribute numbers are zero-based. The attribute must have variable scope.

`entryNum`

Numeric value that specifies the entry in the attribute. Entry numbers are zero-based.

Output Arguments

`Value`

Value of the entry.

Examples

Open the example CDF and get the value of an entry associated with an attribute with variable scope in the file.

```
cdfid = cdflib.open('example.cdf');

% The fourth attribute is of variable scope.
attrscope = cdflib.getAttrScope(cdfid,3)

attrscope =

VARIABLE_SCOPE

% Get information about the first entry for this attribute
[dtype numel] = cdflib.inquireAttrEntry(cdfid,3,0)

dtype =

cdf_char


numel =

    10

% Get the value of the entry for this attribute.
% Note that it is a character vector of length 10
value = cdflib.getAttrEntry(cdfid,3,0)

value =

Time value

% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetAttrzEntry`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.putAttrEntry` | `cdflib.getAttrgEntry` | `cdflib.putAttrgEntry`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getAttrgEntry

Value of entry in global attribute

Syntax

```
value = cdflib.getAttrgEntry(cdfId,attrNum,entryNum)
```

Description

`value = cdflib.getAttrgEntry(cdfId,attrNum,entryNum)` returns the value of a global attribute entry in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`attrNum`

Numeric value that identifies the attribute. Attribute numbers are zero-based. The attribute must have global scope.

`entryNum`

Numeric value that specifies the entry in the attribute. Entry numbers are zero-based.

Output Arguments

`Value`

Value of the entry.

Examples

Open the example CDF, and then get the value of an entry associated with a global attribute in the file:

```
cdfid = cdflib.open('example.cdf');

% Any of the first three attributes have global scope.
attrscope = cdflib.getAttrScope(cdfid,0)

attrscope =

GLOBAL_SCOPE

% Get information about the first entry for global attribute
[dtype numel] = cdflib.inquireAttrgEntry(cdfid,0,0)

dtype =

cdf_char


numel =

    23

% Get the value of the first entry for this global attribute.
value = cdflib.getAttrgEntry(cdfid,0,0)

value =

This is a sample entry.

% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetAttrgEntry`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.putAttrgEntry` | `cdflib.getAttrEntry` | `cdflib.putAttrEntry`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getAttrMaxEntry

Number of last entry for variable attribute

Syntax

```
maxEntry = cdflib.getAttrMaxEntry(cdfId,attrNum)
```

Description

`maxEntry = cdflib.getAttrMaxEntry(cdfId,attrNum)` returns the number of the last entry for an attribute in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file.

`attrNum` is a numeric value that specifies the attribute. Attribute numbers are zero-based. The attribute must have variable scope.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

attrNum

Numeric value that identifies the attribute. Attribute numbers are zero-based. The attribute must have variable scope.

Output Arguments

maxEntry

Entry number of the last entry in the attribute. Entry numbers are zero-based.

Examples

Open the example CDF and get the number of the last entry associated with an attribute with variable scope in the file:

```
cdfid = cdflib.open('example.cdf');

% The fourth attribute is of variable scope.
attrscope = cdflib.getAttrScope(cdfid,3)

attrscope =

VARIABLE_SCOPE


% Get the number of the last entry for this attribute.
entrynum = cdflib.getAttrMaxEntry(cdfid,3)

entrynum =

    3


% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetAttrMaxzEntry`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getAttrMaxgEntry`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getAttrMaxgEntry

Number of last entry for global attribute

Syntax

```
maxEntry = cdflib.getAttrMaxgEntry(cdfId,attrNum)
```

Description

`maxEntry = cdflib.getAttrMaxgEntry(cdfId,attrNum)` returns the last entry number of a global attribute in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`attrNum`

Numeric value that identifies the attribute. Attribute numbers are zero-based. The attribute must have global scope.

Output Arguments

`maxEntry`

Entry number of the last entry in the attribute. Entry numbers are zero-based.

Examples

Open the example CDF and get the number of the last entry associated with a global attribute in the file:

```
cdfid = cdflib.open('example.cdf');
```

```
% Any of the first three attribute are of global scope.
attrscope = cdflib.getAttrScope(cdfid,0)

attrscope =

GLOBAL_SCOPE


% Get the number of the last entry for this attribute.
entrynum = cdflib.getAttrMaxgEntry(cdfid,0)

entrynum =

     4

% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetAttrMaxgEntry`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getAttrMaxEntry`

Topics

"Import CDF Files Using Low-Level Functions"

"Export to CDF Files"

cdflib.getAttrName

Name of attribute, given attribute number

Syntax

```
name = cdflib.getAttrName(cdfId,attrNum)
```

Description

`name = cdflib.getAttrName(cdfId,attrNum)` returns the name of an attribute in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`attrNum`

Numeric value that identifies the attribute. Attribute numbers are zero-based.

Output Arguments

`name`

Character vector specifying the name of the attribute.

Examples

Open the example CDF and get name of an attribute.

```
cdfid = cdflib.open('example.cdf');
```

```
% Get name of the first attribute in the file.
attrName = cdflib.getAttrName(cdfId,0)

attrName =

SampleAttribute

% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetAttrName`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.createAttr`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getAttrNum

Attribute number, given attribute name

Syntax

```
attrNum = cdflib.getAttrNum(cdfId,attrName)
```

Description

`attrNum = cdflib.getAttrNum(cdfId,attrName)` returns the number of an attribute in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`attrName`

Character vector specifying the name of an attribute.

Output Arguments

`attrNum`

Numeric value that identifies the attribute. Attribute numbers are zero-based.

Examples

Open the example CDF and get the attribute number associated with the `SampleAttribute` attribute.

```
cdfid = cdflib.open('example.cdf');

attrNum = cdflib.getAttrNum(cdfid,'SampleAttribute')

attrNum =

    0

% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetAttrNum`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.createAttr` | `cdflib.getAttrName`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getAttrScope

Scope of attribute

Syntax

```
scope = cdflib.getAttrScope(cdfId,attrNum)
```

Description

`scope = cdflib.getAttrScope(cdfId,attrNum)` returns the scope of an attribute in a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

attrNum

Numeric value that specifies the attribute. Attribute numbers are zero-based.

Output Arguments

scope

One of the following character vectors, or its numeric equivalent.

Value	Description
`'GLOBAL_SCOPE'`	Attribute applies to the CDF as a whole.
`'VARIABLE_SCOPE'`	Attribute applies only to the variable.

To get the numeric equivalent of these constants, use the `cdflib.getConstantValue` function.

Examples

Open example CDF and get the scope of the first attribute in the file:

```
cdfid = cdflib.open('example.cdf');

attrScope = cdflib.getAttrScope(cdfid,0)

attrScope =

GLOBAL_SCOPE

% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetAttrScope`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.createAttr` | `cdflib.getAttrName` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getCacheSize

Number of cache buffers used

Syntax

```
numBuffers = cdflib.getCacheSize(cdfId)
```

Description

`numBuffers = cdflib.getCacheSize(cdfId)` returns the number of cache buffers used for the Common Data Format (CDF) file identified by `cdfId`. For a discussion of cache schemes, see the *CDF User's Guide*.

Examples

Open the example CDF file and get the cache size:

```
cdfid = cdflib.open('example.cdf');

numBuf = cdflib.getCacheSize(cdfid)

numBuf =

   300

% Clean up
cdflib.close(cdfid)
clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetCacheSize`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setCacheSize`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getChecksum

Checksum mode

Syntax

```
mode = cdflib.getChecksum(cdfId)
```

Description

`mode = cdflib.getChecksum(cdfId)` returns the checksum mode of the Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

Output Arguments

mode

One of the following character vectors or its numeric equivalent.

`'MD5_CHECKSUM'`	File uses MD5 checksum.
`'NO_CHECKSUM'`	File does not use a checksum.

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

Examples

Open the example CDF file, and then get the checksum mode of the file:

```
cdfid = cdflib.open('example.cdf');

checksummode = cdflib.getChecksum(cdfid)


checksummode =

NO_CHECKSUM

% Clean up
cdflib.close(cdfid);
clear cdfid;
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetChecksum`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setChecksum` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getCompression

Compression settings

Syntax

```
[ctype,cparms,cpercentage] = cdflib.getCompression(cdfId)
```

Description

`[ctype,cparms,cpercentage] = cdflib.getCompression(cdfId)` returns information about the compression settings of a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

Output Arguments

ctype

Character vector specifying compression type, such as `'HUFF_COMPRESSION'`. If the CDF does not use compression, the function returns `'NO_COMPRESSION'`. For a list of supported compression types, see `cdflib.setCompression`.

cparms

The value of the parameter associated with the type of compression. For example, for the `'RLE_COMPRESSION'` compression type, the parameter specifies the style of run-length encoding. For a list of parameters supported by each compression type, see `cdflib.setCompression`.

cpercentage

The rate of compression, expressed as a percentage.

Examples

Open the example CDF file and check the compression settings in the file.

```
cdfId = cdflib.open('example.cdf');

[ctype, cparms, cpercentage] = cdflib.getCompression(cdfId)

ctype =

GZIP_COMPRESSION

cparms =

     7

cper =

    26

% Clean up
cdflib.close(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetCompression`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setCompression` | `cdflib.getVarCompression` | `cdflib.setVarCompression`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getCompressionCacheSize

Number of compression cache buffers

Syntax

```
numBuffers = cdflib.getCompressionCacheSize(cdfId)
```

Description

`numBuffers = cdflib.getCompressionCacheSize(cdfId)` returns the number of cache buffers used for the compression scratch Common Data Format (CDF) file. `cdfId` identifies the CDF file. For a discussion of cache schemes, see the *CDF User's Guide*.

Examples

Open the example CDF file and check the compression cache size of the file:

```
cdfId = cdflib.open('example.cdf');

numBuf = cdflib.getCompressionCacheSize(cdfId)

numBuf =

    80

% Clean up
cdflib.close(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetCompressionCacheSize`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setCompressionCacheSize`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getConstantNames

Names of Common Data Format (CDF) library constants

Syntax

```
names = cdflib.getConstantNames()
```

Description

`names = cdflib.getConstantNames()` returns a cell array of character vectors, where each character vector is the name of a constant known to the Common Data Format (CDF) library.

Examples

Get a list of the names of CDF library constants.

```
names  = cdflib.getConstantNames()

names =

    'AHUFF_COMPRESSION'
    'ALPHAMVSD_ENCODING'
    'ALPHAMVSG_ENCODING'
    'ALPHAMVSI_ENCODING'
    'ALPHAOSF1_ENCODING'
    'CDF_BYTE'
    'CDF_CHAR'
     .
     .
     .
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getConstantValue

Numeric value corresponding to Common Data Format (CDF) library constant

Syntax

```
value = cdflib.getConstantValue(constantName)
```

Description

`value = cdflib.getConstantValue(constantName)` returns the numeric value of the CDF library constant specified by the character vector *`constantName`*. To see a list of constant names, use `cdflib.getConstantNames`.

Examples

View the list of CDF library constants and get the numeric value corresponding to one of the constants.

```
% Retrieve a list of library constants
names = cdflib.getConstantNames();

value  = cdflib.getConstantValue(names{1})

value =

   3
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getConstantNames`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getCopyright

Copyright notice in Common Data Format (CDF) file

Syntax

```
copyright = cdflib.getCopyright(cdfId)
```

Description

`copyright = cdflib.getCopyright(cdfId)` returns the copyright notice in the CDF file identified by `cdfId`.

Examples

Create a CDF file, and then get the copyright notice in the file. To run this example, you must be in a writable folder.

```
cdfId = cdflib.create('your_file.cdf');

copyright  = cdflib.getCopyright(cdfId)

copyright =

Common Data Format (CDF)
(C) Copyright 1990-2009 NASA/GSFC
Space Physics Data Facility
NASA/Goddard Space Flight Center
Greenbelt, Maryland 20771 USA
(Internet -- CDFSUPPORT@LISTSERV.GSFC.NASA.GOV)

% Clean up.
cdflib.delete(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetCopyright`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getLibraryCopyright`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getFileBackward

Return current backward compatibility mode setting

Syntax

```
mode = cdflib.getFileBackward()
```

Description

`mode = cdflib.getFileBackward()` returns the backward compatibility mode.

Output Arguments

`mode`

One of the following character vectors:

`'BACKWARDFILEon'`	Backward compatibility mode is on.
`'BACKWARDFILEoff'`	Backward compatibility mode is off.

For more information about backward compatibility mode, see `cdflib.setFileBackward`.

Examples

```
mode = cdflib.getFileBackward
```

```
mode =

BACKWARDFILEoff
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetFileBackward`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setFileBackward` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getFormat

Format of Common Data Format (CDF) file

Syntax

```
format = cdflib.setFormat(cdfId)
```

Description

`format = cdflib.setFormat(cdfId)` returns the format of the CDF file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

Output Arguments

`format`

One of the following character vectors, or its numeric equivalent.

`'SINGLE_FILE'`	The CDF is stored in a single file.
`'MULTI_FILE'`	The CDF is made up of multiple files.

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

Examples

Open the example CDF file and determine its file format:

```
cdfId = cdflib.open('example.cdf');

format = cdflib.getFormat(cdfId)

format =

   'SINGLE_FILE'

% Clean up.
cdflib.close(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetFormat`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setFormat` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getLibraryCopyright

Copyright notice of Common Data Format (CDF) library

Syntax

```
copyright = cdflib.getLibraryCopyright()
```

Description

`copyright = cdflib.getLibraryCopyright()` returns a character vector containing the copyright notice of the CDF library.

Examples

Get the copyright of the CDF library.

```
copyright  = cdflib.getLibraryCopyright()
```

```
copyright =

Common Data Format (CDF)
(C) Copyright 1990-2008 NASA/GSFC
Space Physics Data Facility
NASA/Goddard Space Flight Center
Greenbelt, Maryland 20771 USA
(Internet -- CDFSUPPORT@LISTSERV.GSFC.NASA.GOV)
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetLibraryCopyright`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getCopyright`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getLibraryVersion

Library version and release information

Syntax

```
[version,release,increment] = cdflib.getLibraryVersion()
```

Description

`[version,release,increment] = cdflib.getLibraryVersion()` returns information about the Common Data Format (CDF) library.

Output Arguments

`version`

Numeric value indicating the version number of the CDF library.

`release`

Numeric value indicating the release number of the CDF library.

`increment`

Numeric value indicating the increment number of the CDF library.

Examples

Get the version information of the CDF library:

```
[version, release, increment] = cdflib.getLibraryVersion()

version =

     3
```

```
release =

     6

increment =

     1
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetLibraryVersion`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVersion`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getMajority

Majority of variables

Syntax

```
majority = cdflib.getMajority(cdfId)
```

Description

`majority = cdflib.getMajority(cdfId)` returns the majority of variables in a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

Output Arguments

majority

One of the following character vectors or its numeric equivalent.

`'ROW_MAJOR'`	C-like array ordering for variable storage. The first dimension in each variable array varies the slowest. This is the default.
`'COLUMN_MAJOR'`	Fortran-like array ordering for variable storage. The first dimension in each variable array varies the fastest.

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

Examples

Open the example CDF file, and then determine the majority of variables in the file:

```
cdfId = cdflib.open('example.cdf');

majority = cdflib.getMajority(cdfId)

majority =

ROW_MAJOR

% Clean up
cdflib.close(cdfId)

clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetMajority`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setMajority` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getName

Name of Common Data Format (CDF) file

Syntax

```
name = cdflib.getName(cdfId)
```

Description

`name = cdflib.getName(cdfId)` returns the name of the CDF file identified by `cdfId`.

Examples

Open the example CDF file and get the name of the file. The path name returned for your installation will be different.

```
cdfId = cdflib.open('example.cdf');

name = cdflib.getName(cdfId)

name =

yourinstallation\matlab\toolbox\matlab\demos\example

% Clean up
cdflib.close(cdfId)

clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetName`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.open` | `cdflib.create`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getNumAttrEntries

Number of entries for attribute with variable scope

Syntax

```
nentries = cdflib.getNumAttrEntries(cdfId,attrNum)
```

Description

`nentries = cdflib.getNumAttrEntries(cdfId,attrNum)` returns the number of entries for the specified attribute in the Common Data Format (CDF) file.

`cdfId` identifies the CDF file.

`attrNum` is a numeric value that specifies the attribute. Attribute numbers are zero-based. The attribute must have variable scope.

Examples

Open the example CDF, find an attribute with variable scope, and determine how many entries are associated with the attribute:

```
cdfid = cdflib.open('example.cdf');

% Get the number of an attribute
% with variable scope
attrNum = cdflib.getAttrNum(cdfid,'Description');

% Check that scope of attribute is variable
attrScope = cdflib.getAttrScope(cdfid,attrNum)

VARIABLE_SCOPE

% Detemine the number of entries for the attribute
attrEntries = cdflib.getNumAttrEntries(cdfid,attrNum)

attrEntries =
```

```
    4

% Clean up
cdflib.close(cdfid);
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetNumAttrzEntries`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getAttrScope`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getNumAttrgEntries

Number of entries for attribute with global scope

Syntax

```
nentries = cdflib.getNumAttrgEntries(cdfId,attrNum)
```

Description

`nentries = cdflib.getNumAttrgEntries(cdfId,attrNum)` returns the number of entries written for the specified global attribute in the Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `attrNum` is a numeric value that identifies the attribute. Attribute numbers are zero-based. The attribute must have global scope.

Examples

Open the example CDF and find out how many entries are associated with a global attribute in the file.

```
cdfid = cdflib.open('example.cdf');

% The first attribute is a global attribute.
attrgEntries = cdflib.getNumAttrgEntries(cdfid,0)

attrgEntries =

    3

% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetNumAttrgEntries`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getNumAttrEntries`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getNumAttributes

Number of attributes with variable scope

Syntax

```
numAtts = cdflib.getNumAttributes(cdfId)
```

Description

`numAtts = cdflib.getNumAttributes(cdfId)` returns the total number of attributes with variable scope in a Common Data Format (CDF) file. `cdfId` identifies the CDF file.

Examples

Open the example CDF and find out how many attributes in the file have variable scope:

```
cdfid = cdflib.open('example.cdf');

% Determine the number of attributes with variable scope
numAttrs = cdflib.getNumAttributes(cdfid)

numAttrs =

    1

% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetNumvAttributes`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getNumgAttributes`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getNumgAttributes

Number of attributes with global scope

Syntax

```
ngatts = cdflib.getNumgAttributes(cdfId)
```

Description

`ngatts = cdflib.getNumgAttributes(cdfId)` returns the total number of global attributes in a Common Data Format (CDF) file. `cdfId` identifies the CDF file.

Examples

Open the example CDF and find out how many global attributes are in the file:

```
cdfid = cdflib.open('example.cdf');

% Determine the number of global attributes in the file.
numgAttrs = cdflib.getNumgAttributes(cdfid)

numgAttrs =

    3

% Clean up
cdflib.close(cdfid);
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetNumgAttributes`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getNumAttributes`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getReadOnlyMode

Read-only mode

Syntax

```
mode = cdflib.getReadOnlyMode(cdfId)
```

Description

`mode = cdflib.getReadOnlyMode(cdfId)` returns the read-only mode of a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

Output Arguments

mode

One of the following character vectors or its numeric equivalent.

`'READONLYon'`	CDF is in read-only mode
`'READONLYoff'`	CDF can be modified.

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

Examples

Open the example CDF file and determine its current read-only status:

```
cdfId = cdflib.open('example.cdf');

mode = cdflib.getReadOnlyMode(cdfId)

mode =

READONLYoff

% Clean up.
cdflib.close(cdfId);
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetReadOnlyMode`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setReadOnlyMode` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getStageCacheSize

Number of cache buffers for staging

Syntax

```
numBuffers = cdflib.getStageCacheSize(cdfId)
```

Description

`numBuffers = cdflib.getStageCacheSize(cdfId)` returns the number of cache buffers used for the staging scratch file of the Common Data Format (CDF) file. For more information about cache buffers, see the *CDF User's Guide*.

`cdfId` identifies the CDF file.

Examples

Open the example CDF file and determine the number of cache buffers used for staging:

```
cdfId = cdflib.open('example.cdf');

numBuf = cdflib.getStageCacheSize(cdfId)

numBuf =

   125

% Clean up
cdflib.close(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetStageCacheSize`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setStageCacheSize`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getValidate

Library validation mode

Syntax

```
mode = cdflib.getValidate()
```

Description

`mode = cdflib.getValidate()` returns the validation mode of the Common Data Format (CDF) library.

Output Arguments

`mode`

One of the following character vectors or its numeric equivalent.

`'VALIDATEFILEon'`	Validation mode is on. For information about validation mode, see `cdflib.setValidate`.
`'VALIDATEFILEoff'`	Validation mode is off.

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

Examples

Determine the current validation mode of the CDF library.

```
mode = cdflib.getValidate()
```

```
mode =

'VALIDATEFILEon'
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetValidate`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setValidate` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarAllocRecords

Number of records allocated for variable

Syntax

```
numrecs = cdflib.getVarAllocRecords(cdfId, varNum)
```

Description

`numrecs = cdflib.getVarAllocRecords(cdfId, varNum)` returns the number of records allocated for a variable in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `varNum` is a numeric value that identifies the variable. Variable numbers are zero-based.

Examples

Open example CDF and get the number of records allocated for a variable:

```
cdfid = cdflib.open('example.cdf');

% Determine the number of records allocated for the
% first variable in the file.
numrecs = cdflib.getVarAllocRecords(cdfid,0)

numrecs =

    64


%  Clean up
cdflib.close(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarAllocRecords`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setVarAllocBlockRecords`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarBlockingFactor

Blocking factor for variable

Syntax

```
blockingFactor = cdflib.getVarBlockingFactor(cdfId,varNum)
```

Description

`blockingFactor = cdflib.getVarBlockingFactor(cdfId,varNum)` returns the blocking factor for a variable in a Common Data Format (CDF) file. A variable's *blocking factor* specifies the minimum number of records the library allocates when you write to an unallocated record.

`cdfId` identifies the CDF file. `varNum` is a numeric value that identifies the variable. Variable numbers are zero-based.

Examples

Open the example CDF and determine the blocking factor of a variable.

```
cdfid = cdflib.open('example.cdf');

cdflib.getVarBlockingFactor(cdfid,0)

ans =

     0

%  Clean up
cdflib.close(cdfid)
clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarBlockingFactor`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setVarBlockingFactor`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarCacheSize

Number of multifile cache buffers

Syntax

```
numBuffers = cdflib.getVarCacheSize(cdfId,varNum)
```

Description

`numBuffers = cdflib.getVarCacheSize(cdfId,varNum)` returns the number of cache buffers used for a variable in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `varNum` is a numeric value that identifies the variable. Variable identifiers are zero-based.

This function applies only to multifile format CDFs. For more information about caching, see the *CDF User's Guide*.

Examples

Create a multifile CDF and retrieve the number of buffers being used for a variable. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf')

% Set the format of the file to be multi-file
cdflib.setFormat(cdfid,'MULTI_FILE');

% Create a variable in the file
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);

% Note how the library creates a separate file for the variable
ls your_file.*

your_file.cdf  your_file.z0

% Determine the number of cache buffers used with the variable
```

```
numBuf = cdflib.getVarCacheSize(cdfid,varNum)

numBuf =

     1

%  Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarCacheSize`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setVarCacheSize`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarCompression

Information about compression used by variable

Syntax

```
[ctype,cparams,percent] = cdflib.getVarCompression(cdfId, varNum)
```

Description

`[ctype,cparams,percent] = cdflib.getVarCompression(cdfId, varNum)` returns information about the compression used for a variable in a Common Data Format (CDF) File.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

Output Arguments

`ctype`

Character vector identifying the type of compression. For a list of compression types, see `cdflib.setCompression`.

`cparams`

Any additional parameter required by the compression type.

`percent`

Numeric value indicating the level of compression, expressed as a percentage.

Examples

Open the example CDF file and check the compression settings of any variable.

```
cdfid = cdflib.open('example.cdf');

% Check the compression setting of any variable in the file
% The example checks the first variable (variable numbers are zero-based).
[ctype params percent] = cdflib.getVarCompression(cdfid,0)

ctype =

NO_COMPRESSION


params =

     []


percent =

   100

% Clean up
cdflib.close(cdfid);
clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarCompression`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setCompression` | `cdflib.setVarCompression`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarData

Single value from record in variable

Syntax

```
datum = cdflib.getVarData(cdfId,varNum,recNum,indices)
datum = cdflib.getVarData(cdfId,varNum,recNum)
```

Description

`datum = cdflib.getVarData(cdfId,varNum,recNum,indices)` returns a single value from a variable in a Common Data Format (CDF) file.

`datum = cdflib.getVarData(cdfId,varNum,recNum)` returns a single value from a variable with no dimensions in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value identifying the variable containing the datum. Variable numbers are zero-based.

`recNum`

Numeric value identifying the location of the datum in the variable. In CDF terminology, this is called the *record number*. Record numbers are zero-based.

`indices`

Array of dimension indices within the record. Dimension indices are zero-based. If the variable has no dimensions, you can omit this parameter.

Output Arguments

datum

Value of the specified record.

Examples

Open the example CDF file and retrieve data associated with a variable:

```
cdfid = cdflib.open('example.cdf');

% Determine how many variables are in the file.
info = cdflib.inquire(cdfid);

info.numVars

ans =

  5

% Determine if the first variable has dimensions.
varinfo = cdflib.inquireVar(cdfid,0);
vardims = varinfo.dims
vardims =

  []

% Get data from variable, without specifying dimensions.
datum = cdflib.getVarData(cdfid, varnum, recnum)

datum =

  6.3146e+013

% Get dimensions of another variable in file.
varinfo = cdflib.inquireVar(cdfid,3);
vardims = varinfo.dims
vardims =

  [4 2 2]
```

```
% Retrieve the first datum in the record. Indices are zero-based.
datum = cdflib.getVarData(cdfId,3,0,[0 0 0])

info =

    30

% Clean up.
cdflib.close(cdfid);
clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarData`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.putVarData` | `cdflib.getVarRecordData` | `cdflib.hyperGetVarData`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarMaxAllocRecNum

Maximum allocated record number for variable

Syntax

```
maxrec = cdflib.getVarMaxAllocRecNum(cdfId,varNum)
```

Description

`maxrec = cdflib.getVarMaxAllocRecNum(cdfId,varNum)` returns the record number of the maximum allocated record for a variable in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `varNum` is a numeric value that identifies the variable. Variable numbers and record numbers are zero-based.

Examples

Open example CDF and get the maximum allocated record number for a variable:

```
cdfid = cdflib.open('example.cdf');

% Determine maximum record number for variable in file.
maxRecNum = cdflib.getVarMaxAllocRecNum(cdfid,0)

maxRecNum =

    63

%  Clean up
cdflib.close(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarMaxAllocRecNum`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarMaxWrittenRecNum`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarMaxWrittenRecNum

Maximum written record number for variable

Syntax

```
maxrec = cdflib.getVarMaxwrittenRecNum(cdfId,varNum)
```

Description

`maxrec = cdflib.getVarMaxwrittenRecNum(cdfId,varNum)` returns the record number of the maximum record written for a variable in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `varNum` is a numeric value that identifies the variable. Variable numbers and record numbers are zero-based.

Examples

Open the example CDF, and then determine the maximum number of records written to a variable:

```
cdfid = cdflib.open('example.cdf');

% Determine the number records written to variable.
numRecs = cdflib.getVarNumRecsWritten(cdfid,0)

numRecs =

    24


% Determine the maximum record number of the records written
maxRecNum = cdflib.getVarMaxWrittenRecNum(cdfid,0)

maxRecNum =

    23
```

```
%  Clean up
cdflib.close(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarMaxWrittenRecNum`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarMaxAllocRecNum` | `cdflib.getVarNumRecsWritten`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarsMaxWrittenRecNum

Maximum written record number for CDF file

Syntax

```
maxrec = cdflib.getVarsMaxwrittenRecNum(cdfId)
```

Description

`maxrec = cdflib.getVarsMaxwrittenRecNum(cdfId)` returns the maximum record number written for all variables in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. Record numbers are zero-based.

Examples

Open the example CDF, and then determine the maximum number of records written to the file:

```
cdfid = cdflib.open('example.cdf');

% Determine the maximum record number of the records written
maxRecNum = cdflib.getVarsMaxWrittenRecNum(cdfid)

maxRecNum =

    23

%  Clean up
cdflib.close(cdfid)
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarsMaxWrittenRecNum`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarMaxWrittenRecNum`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarName

Variable name, given variable number

Syntax

```
name = cdflib.getVarName(cdfId,varNum)
```

Description

`name = cdflib.getVarName(cdfId,varNum)` returns the name of the variable in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `varNum` is a numeric value that identifies the variable. Variable numbers are zero-based. `name` is a character vector specifying the name.

Examples

Open the example CDF, and then get the name of a variable in the file:

```
cdfid = cdflib.open('example.cdf');

name = cdflib.getVarName(cdfid,1)

name =

Longitude

%  Clean up
cdflib.close(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarName`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.inquireVar`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarNum

Variable number, given variable name

Syntax

```
varNum = cdflib.getVarNum(cdfId,varname)
```

Description

`varNum = cdflib.getVarNum(cdfId,varname)` returns the identifier (variable number) for a variable in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. *`varname`* is a character vector that identifies the variable. Variable names are case-sensitive.

Examples

Open example CDF, and then get the number of a variable named `Longitude`:

```
cdfid = cdflib.open('example.cdf');

varNum = cdflib.getVarNum(cdfid,'Longitude')

varNum =

     1

%  Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarNum`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarName`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarNumRecsWritten

Number of records written to variable

Syntax

```
numrecs = cdflib.getVarNumRecsWritten(cdfId,varNum)
```

Description

`numrecs = cdflib.getVarNumRecsWritten(cdfId,varNum)` returns the total number of records written to a variable in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `varNum` is a numeric value that identifies the variable. Variable numbers are zero-based.

Examples

Open the example CDF, and then determine the number of records written to a variable:

```
cdfid = cdflib.open('example.cdf');

% Determine the number of records written to the variable.
numRecs = cdflib.getVarNumRecsWritten(cdfid,0)

numRecs =

    24

%  Clean up
cdflib.close(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarNumRecsWritten`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarMaxWrittenRecNum`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarPadValue

Pad value for variable

Syntax

```
padvalue = cdflib.getVarPadValue(cdfId,varNum)
```

Description

`padvalue = cdflib.getVarPadValue(cdfId,varNum)` returns the pad value used with a variable in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `varNum` is a numeric value that identifies the variable. Variable numbers are zero-based.

Examples

Open the example CDF, and then determine the pad value for a variable:

```
cdfid = cdflib.open('example.cdf');

% Check pad value of variable in the file.
padval = cdflib.getVarPadValue(cdfid,0)

padval =

     0

%  Clean up.
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarPadValue`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setVarPadValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarRecordData

Entire record for variable

Syntax

```
data = cdflib.getVarRecordData(cdfId,varNum,recNum)
```

Description

`data = cdflib.getVarRecordData(cdfId,varNum,recNum)` returns the data in a record associated with a variable in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value that identifies the variable in the CDF file. Variable numbers are zero-based.

`recNum`

Numeric value that identifies the record in the variable. Record numbers are zero-based.

Output Arguments

`data`

Data in the record.

Examples

Open the example CDF, and then get the data associated with a record in a variable:

```
cdfid = cdflib.open('example.cdf');

% Get data in first record in first variable in file.
recData = cdflib.getVarRecordData(cdfid,0,0)

recData =

    6.3146e+013

%  Clean up
cdflib.close(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarRecordData`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.putVarRecordData` | `cdflib.getVarData` | `cdflib.hyperGetVarData`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarReservePercent

Compression reserve percentage for variable

Syntax

```
percent = cdflib.getVarReservePercent(cdfId,varNum)
```

Description

`percent = cdflib.getVarReservePercent(cdfId,varNum)` returns the compression reserve percentage for a variable in a Common Data Format (CDF) file. This operation only applies to compressed variables.

`cdfId` identifies the CDF file. `varNum` is a numeric value that identifies the variable. Variable numbers are zero-based.

Examples

Open the example CDF file, get the number of a compressed variable, and then determine the reserve percent for the variable.

```
cdfid = cdflib.open('example.cdf');
varnum = cdflib.getVarNum(cdfid,'Temperature');
percent = cdflib.getVarReservePercent(cdfid,varnum);
cdflib.close(cdfid);
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

Definitions

reserve percentage

Specifies how much extra space to allocate for a compressed variable. This extra space allows the variable to expand when you write additional records to the variable. If you do not specify this room for growth, the library has to move the variable to the end of the file when the size expands and the space at the original location of the variable becomes wasted space.

By default, the reserve percent is `0` (no extra space is reserved). You can specify any percentage between `1` and `100` and values greater than `100`. The value specifies the percentage of the uncompressed size of the variable.

References

This function corresponds to the CDF library C API routine `CDFgetzVarReservePercent`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setVarReservePercent`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVarSparseRecords

Information about how variable handles sparse records

Syntax

```
stype = cdflib.getVarSparseRecords(cdfId,varNum)
```

Description

`stype = cdflib.getVarSparseRecords(cdfId,varNum)` returns information about how a variable in the Common Data Format (CDF) file handles sparse records.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

varNum

Numeric value that identifies the variable. Variable numbers are zero-based.

Output Arguments

stype

One of the following character vectors, or its numeric equivalent, that specifies how the variable handles sparse records.

Value	Description
`'NO_SPARSERECORDS'`	No sparse records.
`'PAD_SPARSERECORDS'`	For sparse records, the library uses the variable's pad value when reading values from a missing record.

Value	Description
`'PREV_SPARSERECORDS'`	For sparse records, the library uses values from the previous existing record when reading values from a missing record. If there is no previous existing record, the library uses the variable's pad value.

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

Examples

Open the example CDF, and then get the sparse record type of a variable in the file:

```
cdfid = cdflib.open('example.cdf');

stype = cdflib.getVarSparseRecords(cdfid,0)

stype =

NO_SPARSERECORDS

%Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetzVarSparseRecords`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setVarSparseRecords`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.getVersion

Common Data Format (CDF) library version and release information

Syntax

```
[version,release,increment] = cdflib.getVersion(cdfId)
```

Description

`[version,release,increment] = cdflib.getVersion(cdfId)` returns information about the version of the Common Data Format (CDF) library used to create a CDF file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

Output Arguments

version

Numeric value indicating the version number of the CDF library.

release

Numeric value indicating the release number of the CDF library.

increment

Numeric value indicating the increment number of the CDF library.

Examples

Open the example CDF file, and then find out the version of the CDF library used to create it:

```
cdfId = cdflib.open('example.cdf');

[version, release, increment] = cdflib.getVersion(cdfId)

version =

     2

release =

     7

increment =

     8

% Clean up
cdflib.close(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFgetVersion`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getLibraryVersion`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.hyperGetVarData

Read hyperslab of data from variable

Syntax

```
data = cdflib.hyperGetVarData(cdfId,varNum,recSpec,dimSpec)
data = cdflib.hyperGetVarData(cdfId,varNum,recSpec)
```

Description

`data = cdflib.hyperGetVarData(cdfId,varNum,recSpec,dimSpec)` reads a hyperslab of data from a variable in the Common Data Format (CDF) file. Hyper access allows more than one value to be read from or written to a variable with a single call to the CDF library.

`data = cdflib.hyperGetVarData(cdfId,varNum,recSpec)` reads a hyperslab of data for a zero-dimensional variable in the Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Number identifying the variable containing the datum.

`recSpec`

Three-element array, `[RSTART RCOUNT RSTRIDE]`, where `RSTART`, `RCOUNT`, and `RSTRIDE` are scalar values specifying the starting record, number of records to read, and the sampling interval or stride between records. Record numbers are zero-based.

`dimSpec`

Three-element cell array, `{DSTART DCOUNT DSTRIDE}`, where `DSTART`, `DCOUNT`, and `DSTRIDE` are *n*-element vectors that describe the start, number of values along each

dimension, and sampling interval along each dimension. If the hyperslab has zero dimensions, you can omit this parameter. Dimension indices are zero-based.

Examples

Open the example CDF file, and then get all the data associated with a variable:

```
cdfid = cdflib.open('example.cdf');

% Determine the number of records allocated for the first variable in the file.
maxRecNum = cdflib.getVarMaxWrittenRecNum(cdfid,0);

% Retrieve all data in records for variable.
data = cdflib.hyperGetVarData(cdfid,0,[0 maxRecNum 1]);

%  Clean up
cdflib.close(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFhyperGetzVarData`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.hyperPutVarData`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.hyperPutVarData

Write hyperslab of data to variable

Syntax

```
cdflib.hyperPutVarData(cdfId,varNum,recSpec,dimSpec,data)
```

Description

`cdflib.hyperPutVarData(cdfId,varNum,recSpec,dimSpec,data)` writes a hyperslab of data to a variable in a Common Data Format (CDF) file. Hyper access allows more than one value to be read from or written to a variable with a single call to the CDF library.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

varNum

Specifies the variable containing the datum.

recSpec

Three-element array described by `[RSTART RCOUNT RSTRIDE]`, where `RSTART`, `RCOUNT`, and `RSTRIDE` are scalar values giving the start, number of records, and sampling interval (or stride) between records. Record indices are zero-based.

dimSpec

Three-element cell array described by `{DSTART DCOUNT DSTRIDE}`, where `DSTART`, `DCOUNT`, and `DSTRIDE` are n-element vectors that describe the start, number of values along each dimension, and sampling interval along each dimension. If the hyperslab has zero dimensions, you can omit this parameter. Dimension indices are zero-based.

data

Data to write to the variable.

Examples

Create a CDF, create a variable, and then write a slab of data to the variable. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Grades','cdf_int1',1,[],true,[]);

% Write data to the variable
cdflib.hyperPutVarData(cdfid,varNum,0,[],int8(98))


%Clean up
cdflib.delete(cdfid);
clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFhyperzPutVarData`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.hyperGetVarData`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.inquire

Basic characteristics of Common Data Format (CDF) file

Syntax

```
info = cdflib.inquire(cdfId)
```

Description

`info = cdflib.inquire(cdfId)` returns basic information about a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

Output Arguments

info

A structure containing the following fields:

Field	Description
`encoding`	Encoding of the variable data and attribute entry data
`majority`	Majority of the variable data
`maxRec`	Maximum record number written to a CDF variable
`numVars`	Number of CDF variables
`numvAttrs`	Number of attributes with variable scope
`numgAttrs`	Number of attributes with global scope

Examples

Open the example CDF file, and then get basic information about the file:

```
cdfId = cdflib.open('example.cdf');

info = cdflib.inquire(cdfId)

info =

     encoding: 'IBMPC_ENCODING'
     majority: 'ROW_MAJOR'
       maxRec: 23
      numVars: 5
    numvAttrs: 1
    numgAttrs: 3
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routines `CDFinquireCDF` and `CDFgetNumgAttributes`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.inquireVar`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.inquireAttr

Information about attribute

Syntax

```
info = cdflib.inquireAttr(cdfId,attrNum)
```

Description

`info = cdflib.inquireAttr(cdfId,attrNum)` returns information about an attribute in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`attrNum`

Numeric value that identifies the attribute in the file. Attribute numbers are zero-based.

Output Arguments

`info`

Structure containing the following fields.

Field	Description
`name`	Attribute's name
`scope`	Either `'GLOBAL_SCOPE'` or `'VARIABLE_SCOPE'`
`maxgEntry`	The maximum entry number used for global attributes.

Field	Description
`maxEntry`	The maximum entry number used for attributes with variable scope.

Examples

Open the example CDF, and then get information about the first attribute in the file.

```
cdfid = cdflib.open('example.cdf');

% Get information about an attribute
info = cdflib.inquireAttr(cdfid,0)

info =

         name: 'SampleAttribute'
        scope: 'GLOBAL_SCOPE'
    maxgEntry: 4
     maxEntry: -1

% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFinquireAttr`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.inquireAttrgEntry` | `cdflib.inquireAttrEntry`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.inquireAttrEntry

Information about entry in attribute with variable scope

Syntax

```
[datatype,numElements] =
cdflib.inquireAttrEntry(cdfId,attrNum,entryNum)
```

Description

`[datatype,numElements] = cdflib.inquireAttrEntry(cdfId,attrNum,entryNum)` returns the data type and the number of elements for an attribute entry in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`attrNum`

Numeric value identifying an attribute in the file. Attribute numbers are zero-based. The attribute must have variable scope.

`entryNum`

Numeric value identifying the entry in the attribute. Entry number are zero-based.

Output Arguments

`datatype`

Character vector identifying a CDF data type. For a list of CDF data types, see `cdflib.putAttrEntry`

numElements

Numeric value indicating the number of elements in the entry.

Examples

Open example CDF, and then get information about entries associated with an attribute in the file:

```
cdfid = cdflib.open('example.cdf');

% The fourth attribute is of variable scope.
attrscope = cdflib.getAttrScope(cdfid,3)

attrscope =

VARIABLE_SCOPE

% Get information about the first entry for this attribute
[dtype numel] = cdflib.inquireAttrEntry(cdfid,3,0)

dtype =

cdf_char


numel =

    10


% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFinquireAttrzEntry`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.inquireAttr` | `cdflib.getAttrScope`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.inquireAttrgEntry

Information about entry in attribute with global scope

Syntax

```
[datatype,numElements] =
cdflib.inquireAttrgEntry(cdfId,attrNum,entryNum)
```

Description

`[datatype,numElements] = cdflib.inquireAttrgEntry(cdfId,attrNum,entryNum)` returns the data type and the number of elements for a global attribute entry in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`attrNum`

Numeric value identifying an attribute in the file. Attribute numbers are zero-based. The attribute must have global scope.

`entryNum`

Numeric value identifying the entry in the attribute. Entry number are zero-based.

Output Arguments

`datatype`

Character vector identifying a CDF data type. For a list of CDF data types, see `cdflib.putAttrgEntry`

numElements

Numeric value indicating the number of elements in the entry.

Examples

Open the example CDF, and then get information about entries associated with a global attribute in the file.

```
cdfid = cdflib.open('example.cdf');

% Any of the first three attributes have global scope.
attrscope = cdflib.getAttrScope(cdfid,0)

attrscope =

GLOBAL_SCOPE

% Get information about the first entry for this attribute
[dtype numel] = cdflib.inquireAttrgEntry(cdfid,0,0)

dtype =

cdf_char


numel =

    23


% Clean up
cdflib.close(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"

- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFinquireAttrgEntry`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.inquireAttr` | `cdflib.inquireAttrEntry`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.inquireVar

Information about variable

Syntax

```
info = cdflib.inquireVar(cdfId,varNum)
```

Description

`info = cdflib.inquireVar(cdfId,varNum)` returns information about a variable in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value that identifies the variable. Variable numbers are zero-based.

Output Arguments

`info`

Structure containing the following fields.

Field	Description
`name`	Name of the variable
`datatype`	Data type
`numElements`	Number of elements of the datatype
`dims`	Sizes of the dimensions

Field	Description
recVariance	Record variance
dimVariance	Dimension variances

Record and dimension variances affect how the library physically stores variable data. For example, if a variable has a record variance of VARY, the library physically stores each record. If the record variance is NOVARY, the library only stores one record.

Examples

Open the example CDF file and get information about a variable.

```
cdfid = cdflib.open('example.cdf');

% Determine if the file contains variables
info  = cdflib.inquireVar(cdfid,1)

info =

           name: 'Longitude'
       datatype: 'cdf_int1'
    numElements: 1
           dims: [2 2]
    recVariance: 0
    dimVariance: [1 0]
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine CDFinquirezVar.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.inquire`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.open

Open existing Common Data Format (CDF) file

Syntax

`cdfId = cdflib.open(filename)`

Description

`cdfId = cdflib.open(filename)` opens an existing Common Data Format (CDF) file. *`filename`* is a character vector that identifies the file.

This function returns a CDF file identifier, `cdfId`.

All CDF files opened this way have the `zMode` set to `zModeon2`. Refer to the *CDF User's Guide* for information about `zModes`.

Examples

Open the example CDF file:

```
cdfId = cdflib.open('example.cdf');

% Clean up
cdflib.close(cdfId)

clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFopenCDF`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.close` | `cdflib.create`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.putAttrEntry

Write value to entry in attribute with variable scope

Syntax

```
cdflib.putAttrEntry(cdfId,attrNum,entryNum,CDFDataType,entryVal)
```

Description

`cdflib.putAttrEntry(cdfId,attrNum,entryNum,CDFDataType,entryVal)` writes a value to an attribute entry in a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

attrNum

Number identifying attribute. The attribute must have variable scope. Attribute numbers are zero-based.

entryNum

Number identifying entry. Entry numbers are zero-based.

CDFdatatype

One of the following text character vectors, or its numeric equivalent, that specify the data type of the attribute entry.

CDF Data Type	MATLAB Equivalent
`'CDF_BYTE'`	1-byte, signed integer
`'CDF_CHAR'`	1 byte, signed character data type that maps to the MATLAB `char` class

CDF Data Type	MATLAB Equivalent
'CDF_INT1'	1-byte, signed integer.
'CDF_UCHAR'	1 byte, unsigned character data type that maps to the MATLAB `uint8` class
'CDF_UINT1'	1-byte, unsigned integer
'CDF_INT2'	2-byte, signed integer
'CDF_UINT2'	2-byte, unsigned integer.
'CDF_INT4'	4-byte, signed integer
'CDF_UINT4'	4-byte, unsigned integer
'CDF_FLOAT'	4-byte, floating point
'CDF_REAL4'	4-byte, floating point
'CDF_REAL8'	8-byte, floating point.
'CDF_DOUBLE'	8-byte, floating point
'CDF_EPOCH'	8-byte, floating point
'CDF_EPOCH16'	two 8-byte, floating point

`entryVal`

Data to be written to attribute entry.

Examples

Create a CDF and create an attribute with variable scope in the file. Write a value to an entry in the attribute. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Initially the file contains no attributes, global or variable.
info = cdflib.inquire(cdfid)

info =

     encoding: 'IBMPC_ENCODING'
     majority: 'ROW_MAJOR'
       maxRec: -1
```

```
      numVars: 0
    numvAttrs: 0
    numgAttrs: 0

% Create an attribute of variable scope in the file.
attrNum = cdflib.createAttr(cdfid,'Another Attribute','variable_scope');

% Write a value to an entry for the attribute
cdflib.putAttrEntry(cdfid,attrNum,0,'CDF_CHAR','My Variable Attribute Test');

% Get the value of the global attribute entry
value = cdflib.getAttrEntry(cdfid,attrNum,0)

value =

My Variable Attribute Test


% Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFputAttrzEntry`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getAttrEntry` | `cdflib.putAttrgEntry` | `cdflib.getAttrgEntry` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.putAttrgEntry

Write value to entry in attribute with global scope

Syntax

```
cdflib.putAttrgEntry(cdfId,attrNum,entryNum,cdfDataType,entryVal)
```

Description

`cdflib.putAttrgEntry(cdfId,attrNum,entryNum,cdfDataType,entryVal)` writes a value to a global attribute entry in a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

attrNum

Number identifying attribute. Attribute numbers are zero-based. The attribute must have global scope.

entryNum

Number identifying entry. Entry numbers are zero-based.

CDFdatatype

One of the following character vectors that specify the data type of the attribute entry, or its numeric equivalent.

CDF Data Type	MATLAB Equivalent
`'CDF_BYTE'`	1-byte, signed integer
`'CDF_CHAR'`	1 byte, signed character data type that maps to the MATLAB `char` class

CDF Data Type	MATLAB Equivalent
'CDF_INT1'	1-byte, signed integer.
'CDF_UCHAR'	1 byte, unsigned character data type that maps to the MATLAB `uint8` class
'CDF_UINT1'	1-byte, unsigned integer
'CDF_INT2'	2-byte, signed integer
'CDF_UINT2'	2-byte, unsigned integer.
'CDF_INT4'	4-byte, signed integer
'CDF_UINT4'	4-byte, unsigned integer
'CDF_FLOAT'	4-byte, floating point
'CDF_REAL4'	4-byte, floating point
'CDF_REAL8'	8-byte, floating point.
'CDF_DOUBLE'	8-byte, floating point
'CDF_EPOCH'	8-byte, floating point
'CDF_EPOCH16'	two 8-byte, floating point

`entryVal`

Data to be written to global attribute entry.

Examples

Create a CDF and create a global attribute in the file. Write a value to an entry in the attribute. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Initially the file contains no attributes, global or variable.
info = cdflib.inquire(cdfid)

info =

     encoding: 'IBMPC_ENCODING'
     majority: 'ROW_MAJOR'
       maxRec: -1
```

```
      numVars: 0
    numvAttrs: 0
    numgAttrs: 0

% Create a global attribute in the file.
attrNum = cdflib.createAttr(cdfid,'Purpose','global_scope');

% Write a value to an entry for the global attribute
cdflib.putAttrgEntry(cdfid,attrNum,0,'CDF_CHAR','My Test');

% Get the value of the global attribute entry
value = cdflib.getAttrgEntry(cdfid,attrNum,0)

value =

My Test

% Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFputAttrgEntry`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getAttrgEntry` | `cdflib.putAttrEntry` | `cdflib.getAttrEntry` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.putVarData

Write single value to variable

Syntax

```
cdflib.putVarData(cdfId,varNum,recNum,indices,datum)
```

Description

`cdflib.putVarData(cdfId,varNum,recNum,indices,datum)` writes a single value to a variable in a Common Data File (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value that identifies the variable to which you want to write the datum. Variable numbers are zero-based.

`recNum`

Numeric value that identifies the record to which you want to write the datum. Record numbers are zero-based.

`dims`

Dimension indices within the record. Dimension indices are zero-based.

`datum`

Data to be written to the variable.

Examples

Create a CDF, create a variable in the CDF and write data to the variable. To run this example, you must have write permission in the current folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Grades','cdf_int1',1,[],true,[]);

% Write some data to the variable
cdflib.putVarData(cdfid,varNum,0,[],int8(98))

% Read the value from the variable.
datum = cdflib.getVarData(cdfid,varNum,0)

datum =

   98

%Clean up
cdflib.delete(cdfid);
clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFputzVarData`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarData` | `cdflib.getVarRecordData` | `cdflib.hyperGetVarData`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.putVarRecordData

Write entire record to variable

Syntax

```
cdflib.putVarRecordData(cdfId,varNum,recNum,recordData)
```

Description

`cdflib.putVarRecordData(cdfId,varNum,recNum,recordData)` writes data to a record in a variable in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value that identifies the variable to which you want to write the datum. Variable numbers are zero-based.

`recNum`

Numeric value identifying the location of the datum in the variable. Record numbers are zero-based.

`recordData`

Data to be written to the variable.

Examples

Create a CDF, create a variable, and write an entire record of data to the variable. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Grades','cdf_int1',1,[],true,[]);

% Write some data to the variable
cdflib.putVarRecordData(cdfid,varNum,0,int8(98))

% Read the value from the variable.
datum = cdflib.getVarData(cdfid,varNum,0)

datum =

   98

%Clean up
cdflib.delete(cdfid);
clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFputzVarRecordData`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarRecordData` | `cdflib.putVarData` | `cdflib.hyperPutVarData`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.renameAttr

Rename existing attribute

Syntax

```
cdflib.renameAttr(cdfId,attrNum,newName)
```

Description

`cdflib.renameAttr(cdfId,attrNum,newName)` renames an attribute in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `attrNum` is a numeric value that identifies the attribute. Attribute numbers are zero-based. `newName` is a character vector that specifies the name you want to assign to the attribute.

Examples

Create a CDF, create an attribute in the CDF, and then rename the attribute. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create an attribute
attrNum = cdflib.createAttr(cdfid,'Purpose','global_scope');

% Rename the attribute
cdflib.renameAttr(cdfid, attrNum, 'NewPurpose');

% Check the name of the attribute
attrName = cdflib.getAttrName(cdfid,anum)

attrName =

NewPurpose

% Clean up
```

```
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFrenameAttr`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.createAttr`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.renameVar

Rename existing variable

Syntax

```
cdflib.renameVar(cdfId,varNum,newName)
```

Description

`cdflib.renameVar(cdfId,varNum,newName)` renames a variable in a Common Data Format (CDF) file.

`cdfId` identifies the CDF file. `varNum` is a numeric value that identifies the variable. Variable numbers are zero-based. `newName` is a character vector that specifies the name you want to assign to the variable.

Examples

Create a CDF, create a variable in the CDF, and then rename the variable. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);

% Get the name of the variable.
name = cdflib.getVarName(cdfid,varNum)

name =

Time

% Rename the variable
cdflib.renameVar(cdfid,varNum,'NewName');

% Check the new name.
```

```
name = cdflib.getVarName(cdfid,varNum)

name =

NewName

%  Clean up
cdflib.delete(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFrenamezVar`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.createVar`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setCacheSize

Specify number of dotCDF cache buffers

Syntax

```
cdflib.setCacheSize(cdfId,numBuffers)
```

Description

`cdflib.setCacheSize(cdfId,numBuffers)` specifies the number of cache buffers the CDF library uses for an open dotCDF file. A *dotCDF* file is a file with the `.cdf` file extension.

`cdfId` identifies an open CDF file. `numBuffers` is a numeric value that specifies the number of buffers.

For information about cache schemes, see the *CDF User's Guide*.

Examples

Create a CDF file and set the cache size. To run this example, you must have write permission in your current folder.

```
cdfId = cdflib.create('your_file.cdf');

% Get the default cache size
numBuf = cdflib.getCacheSize(cdfid)

numBuf =

   300

% Specify a cache size
cdflib.setCacheSize(cdfid,150)

% Check the cache size again
numBuf =  cdflib.getCacheSize(cdfid)
```

```
numBuf =

   150

% Clean up
cdflib.delete(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetCacheSize`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getCacheSize`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setChecksum

Specify checksum mode

Syntax

```
cdflib.setChecksum(cdfId,mode)
```

Description

`cdflib.setChecksum(cdfId,mode)` specifies the checksum mode of a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

mode

One of the following character vectors, or its numeric equivalent.

`'MD5_CHECKSUM'`	Sets file checksum to MD5 checksum.
`'NO_CHECKSUM'`	File does not use a checksum.

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

Examples

Create a CDF file and set the checksum mode. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('mycdf.cdf');
```

```
% Check initial value of checksum.
mode = cdflib.getChecksum(cdfid)

NO_CHECKSUM

cdflib.setChecksum(cdfid,'MD5_CHECKSUM')

% Verify the setting
mode = cdflib.getChecksum(cdfid)

MD5_CHECKSUM
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetChecksum`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getChecksum` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setCompression

Specify compression settings

Syntax

```
cdflib.setCompression(cdfId,ctype,cparms)
```

Description

`cdflib.setCompression(cdfId,ctype,cparms)` specifies compression settings of a Common Data Format (CDF) file.

This function sets the compression for the CDF file itself, not that of any variables in the file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

ctype

One of the following character vectors, or its numeric equivalent, specifying compression type.

Value	Compression Type
`'NO_COMPRESSION'`	No compression
`'RLE_COMPRESSION'`	Run-length encoding compression
`'HUFF_COMPRESSION'`	Huffman compression
`'AHUFF_COMPRESSION'`	Adaptive Huffman compression
`'GZIP_COMPRESSION'`	GNU's zip compression

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

cparms

Optional parameter specifying any additional parameters required by the compression type. Currently, the only compression type that uses this parameter is `'GZIP_COMPRESSION'`. For this compression type, use `cparms` to specify the level of compression as a numeric value between 1 and 9.

Examples

Create a CDF file and set the compression setting of the file. To run this example, your current folder must be writable.

```
cdfId = cdflib.create('your_file.cdf');

% Determine the file's default compression setting
[ctype, cparms, cpercent ] = cdflib.getCompression(cdfId)

ctype =

NO_COMPRESSION

cparms =

     []

cpercent =

   100

% Specify new compression setting
cdflib.setCompression(cdfId,'HUFF_COMPRESSION');

% Check the file's compression setting.
[ctype, cparms, cpercent ] = cdflib.getCompression(cdfId)

ctype =

HUFF_COMPRESSION
```

```
cparms =

OPTIMAL_ENCODING_TREES


cpercent =

     0

% Clean up
cdflib.delete(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetCompression`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getCompression` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setCompressionCacheSize

Specify number of compression cache buffers

Syntax

```
cdflib.setCompressionCacheSize(cdfId,numBuffers)
```

Description

`cdflib.setCompressionCacheSize(cdfId,numBuffers)` specifies the number of cache buffers used for the compression scratch CDF file. For more information about CDF cache schemes, see the *CDF User's Guide*.

`cdfId` identifies the CDF file. `numBuffers` specifies the number of buffers.

Examples

Create a CDF file and specify the number of compression cache buffers used. To run this example you must be in a writable folder.

```
cdfId = cdflib.create('your_file.cdf');

% Get the current number of compression cache buffers
numBuf = cdflib.getCompressionCacheSize(cdfId)

numBuf =

    80

% Set a new value
cdflib.setCompressionCacheSize(cdfId,100)

% Check the new value
numBuf = cdflib.getCompressionCacheSize(cdfId)

numBuf =
```

```
   100

% Clean up
cdflib.delete(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetCompressionCacheSize`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getCompressionCacheSize`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setFileBackward

Set backward compatibility mode

Syntax

```
cdflib.setFileBackward(mode)
```

Description

`cdflib.setFileBackward(mode)` sets the backward compatibility mode to the value specified by `mode`.

Input Arguments

`mode`

One of the following character vectors:

`'BACKWARDFILEon'`	Set backward compatibility mode on.
`'BACKWARDFILEoff'`	Set backward compatibility mode off.

Default: `'BACKWARDFILEoff'`

Examples

Set backward compatibility mode and then check the value.

```
cdflib.setFileBackward('BACKWARDFILEon');

mode = cdflib.getFileBackward

mode =

BACKWARDFILEon
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

Definitions

backward compatibility mode

When specified, ensures that any new CDF file created using CDF V3.0 (or later) will be readable by clients using version 2.7 of the CDF library. CDF 3.0 and later releases use a 64-bit file offset to allow for files greater than 2G bytes in size. CDF library versions released before CDF 3.0 use a 32-bit file offset.

Tips

- Setting backward compatibility mode affects only your current MATLAB session, or until you call `cdflib.setFileBackward` again.

References

This function corresponds to the CDF library C API routine `CDFsetFileBackward`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getFileBackward` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setFormat

Specify format of Common Data Format (CDF) file

Syntax

`cdflib.setFormat(cdfId,format)`

Description

`cdflib.setFormat(cdfId,format)` specifies the format of a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

format

One of the following character vectors, or its numeric equivalent.

`'SINGLE_FILE'`	The CDF consists of only one file. This is the default file format
`'MULTI_FILE'`	The CDF consists of one header file for control and attribute data and one additional file for each variable in the CDF.

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

Examples

Create a CDF file and specify its format. To run this example, you must have write permission in your current folder.

```
cdfId = cdflib.create('mycdffile.cdf');

% Specify multifile format.
cdflib.setFormat(cdfId, 'MULTI_FILE');

% Check format.
 format = cdflib.getFormat(cdfId)

format =

MULTI_FILE

% Clean up
cdflib.delete(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetFormat`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getFormat` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setMajority

Specify majority of variables

Syntax

`cdflib.setMajority(cdfId,majority)`

Description

`cdflib.setMajority(cdfId,majority)` specifies the majority of variables in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`majority`

One of the following character vectors, or its numeric equivalent.

`'ROW_MAJOR'`	C-like array ordering for variable storage. The first dimension in each variable array varies the slowest. This is the default.
`'COLUMN_MAJOR'`	Fortran-like array ordering for variable storage. The first dimension in each variable array varies the fastest.

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

Examples

Create a CDF file and specify the majority used by variables in the file. To run this example, you must have write permission in your current folder.

```
cdfId = cdflib.create('your_file.cdf')

% Specify the majority used by variables in the file
cdflib.setMajority(cdfId,'COLUMN_MAJOR');

% Check the majority value
majority = cdflib.getMajority(cdfId)

majority =

COLUMN_MAJOR

% Clean up
cdflib.delete(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetMajority`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getMajority`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setReadOnlyMode

Specify read-only mode

Syntax

`cdflib.setReadOnlyMode(cdfId,mode)`

Description

`cdflib.setReadOnlyMode(cdfId,mode)` specifies the read-only mode of a Common Data Format (CDF) file.

After you open a CDF file, you can put the file into read-only mode to prevent accidental modification.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`mode`

One of the following character vectors or its numeric equivalent.

`'READONLYon'`	CDF file is read-only
`'READONLYoff'`	CDF file is modifiable.

To get the numeric equivalent of these mode values, use `cdflib.getConstantValue`.

Examples

Open the example CDF file and set the file to read-only mode.

```
cdfId = cdflib.open('example.cdf');

% Set the  file to READONLY mode
cdflib.setReadOnlyMode(cdfId,'READONLYon')

% Check read-only status of file again.
mode = cdflib.getReadOnlyMode(cdfId)

mode =

READONLYon

% Clean up
cdflib.close(cdfId)
clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetReadOnlyMode`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getReadOnlyMode` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setStageCacheSize

Specify number of staging cache buffers for Common Data Format (CDF) file

Syntax

```
cdflib.setStageCacheSize(cdfId,numBuffers)
```

Description

`cdflib.setStageCacheSize(cdfId,numBuffers)` specifies the number of staging cache buffers for a Common Data Format (CDF) file. For information about CDF cache schemes, see the *CDF User's Guide*.

`cdfId` identifies the CDF file. `numBuffers` is a numeric value that specifies the number of buffers.

Examples

Open the example CDF file and specify the number of cache buffers used.

```
cdfId = cdflib.open('example.cdf');

% Get current number of staging cache buffers
size = cdflib.getStageCacheSize(cdfId)

size =

   125

% Specify new cache size value.
cdflib.setStageCacheSize(cdfId, 200)

% Get size again.
size = cdflib.getStageCacheSize(cdfId)

size =
```

```
   200

% Clean up
cdflib.close(cdfId)

clear cdfId
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetStageCacheSize`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getStageCacheSize`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setValidate

Specify library validation mode

Syntax

`cdflib.setValidate(mode)`

Description

`cdflib.setValidate(mode)` specifies the validation mode of the Common Data Format (CDF) library. Specify the validation mode before opening any files.

Input Arguments

`mode`

One of the following character vectors, or its numeric equivalent:

`'VALIDATEFILEon'`	Turns validation mode on. With validation mode on, the library performs sanity checks on the data fields in the CDF' file's internal data structures to make sure that the values are within valid ranges and consistent with the defined values/types/entries. This mode also ensures that variable and attribute associations within the file are valid. Note, however, that enabling this mode will, in most cases, slow down the file opening process, especially for large or very fragmented files.
`'VALIDATEFILEoff`	Turns validation mode off.

To get the numeric equivalent of these values, use `cdflib.getConstantValue`.

Examples

Set the validation mode of the CDF library.

```
cdflib.setValidate('VALIDATEFILEon');
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetValidate`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getValidate` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setVarAllocBlockRecords

Specify range of records to be allocated for variable

Syntax

```
cdflib.setVarAllocBlockRecords(cdfId,varNum,firstrec,lastrec)
```

Description

`cdflib.setVarAllocBlockRecords(cdfId,varNum,firstrec,lastrec)` specifies a range of records you want to allocate (but not write) for a variable in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value identifying a variable in the file. Variable identifiers (variable numbers) are zero-based.

`firstRec`

Numeric value identifying the record at which to start allocating. Record numbers are zero-based.

`lastRec`

Numeric value identifying the record at which to stop allocating. Record numbers are zero-based.

Examples

Create a CDF, create a variable in the CDF, and then specify the number of records to allocate for the variable. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Grades','cdf_int1',1,[],true,[]);

% Specify the number of records to allocate.
cdflib.setVarAllocBlockRecords(cdfid,varNum,1,10);


%  Clean up
cdflib.delete(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetzVarAllocBlockRecords`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarAllocRecords`

Topics

"Import CDF Files Using Low-Level Functions"

"Export to CDF Files"

cdflib.setVarBlockingFactor

Specify blocking factor for variable

Syntax

```
cdflib.setVarBlockingFactor(cdfId,varNum,blockingFactor)
```

Description

`cdflib.setVarBlockingFactor(cdfId,varNum,blockingFactor)` specifies the blocking factor for a variable in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value identifying a variable in the file. Variable numbers are zero-based.

`blockingFactor`

Numeric value that specifies the number of records to allocate when writing to an unallocated record.

Examples

Create a CDF, create a variable in the CDF, and then set the blocking factor used with the variable. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);
```

```
% Get the current blocking factor used with the variable
bFactor = cdflib.getVarBlockingFactor(cdfid,varNum)

bFactor =

    0

% Change the blocking factor for the variable
cdflib.setVarBlockingFactor(cdfid,varNum,10);

% Check the new blocking factor .
bFactor = cdflib.getVarBlockingFactor(cdfid,varNum)

bFactor =

    10

%  Clean up
cdflib.delete(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

Definitions

blocking factor

A variable's *blocking factor* specifies the minimum number of records the library allocates when you write to an unallocated record. If you specify a fractional blocking factor, the library rounds the value down.

References

This function corresponds to the CDF library C API routine `CDFsetzVarBlockingFactor`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarBlockingFactor`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setVarCacheSize

Specify number of multi-file cache buffers for variable

Syntax

```
cdflib.setVarCacheSize(cdfId,varNum,numBuffers)
```

Description

`cdflib.setVarCacheSize(cdfId,varNum,numBuffers)` specifies the number of cache buffers the CDF library uses for a variable in a Common Data Format (CDF) file.

This function is only used with multifile format CDF files. It does not apply to single-file format CDFs. For more information about caching, see the *CDF User's Guide*.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value identifying a variable in the file. Variable identifiers (variable numbers) are zero-based.

`numBuffers`

Numeric value identifying the number of cache buffers to use.

Examples

Create a multifile CDF, and then retrieve the number of buffers being used for a variable:

```
cdfid = cdflib.create('your_file.cdf')
```

```
% Set the format of the file to be multi-file
cdflib.setFormat(cdfid,'MULTI_FILE');

% Create a variable in the file
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);

% Note how the library creates a separate file for the variable
ls your_file.*

your_file.cdf  your_file.z0

% Determine the number of cache buffers used with the variable
numBuf = cdflib.getVarCacheSize(cdfid,varNum)

numBuf =

     1

% Increase the number of cache buffers used.
cdflib.setVarCacheSize(cdfid,varNum,5)

% Check the number of cache buffers used with the variable.
numBuf = cdflib.getVarCacheSize(cdfid,varNum)

numBuf =

     5

%  Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetzVarCacheSize`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarCacheSize` | `cdflib.setVarsCacheSize`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setVarCompression

Specify compression settings used with variable

Syntax

```
cdflib.setVarCompression(cdfId,varNum,ctype,cparams)
```

Description

`cdflib.setVarCompression(cdfId,varNum,ctype,cparams)` configures the compression setting for a variable in a Common Data Format (CDF) file.

Input Arguments

cdfId

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

varNum

Numeric value identifying a variable in the file. Variable identifiers (variable numbers) are zero-based.

ctype

One of the following character vectors, or its numeric equivalent, specifying the compression type.

Value	Compression Type
`'NO_COMPRESSION'`	No compression.
`'RLE_COMPRESSION'`	Run-length encoding compression
`'HUFF_COMPRESSION'`	Huffman compression
`'AHUFF_COMPRESSION'`	Adaptive Huffman compression

Value	Compression Type
'GZIP_COMPRESSION'	GNU's zip compression

To get the numeric equivalent of the constants specified by these character vectors, use `cdflib.getConstantValue`.

`cparams`

Optional parameter specifying any additional parameters required by the compression type. Currently, the only compression type that uses this parameter is `'GZIP_COMPRESSION'`. For this compression type, you use `cparms` to specify the level of compression as a numeric value between 1 and 9.

Examples

Create a CDF, create a variable, and then set the compression used by the variable. To run this example, you must be in a folder with execute permission.

```
cdfid = cdflib.create('mycdf.cdf');

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);

% Specify the compression used by the variable.
cdflib.setVarCompression(cdfid,0,'GZIP_COMPRESSION',8)

% Check the compression setting of the variable
[ctype params percent] = cdflib.getVarCompression(cdfid,0)

ctype =

GZIP_COMPRESSION

params =

     8

percent =

     0
```

```
% Clean up
cdflib.delete(cdfid);
clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetzVarCompression`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.setCompression` | `cdflib.getVarCompression`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setVarInitialRecs

Specify initial number of records written to variable

Syntax

```
cdflib.setVarInitialRecs(cdfId,varNum,numrecs)
```

Description

`cdflib.setVarInitialRecs(cdfId,varNum,numrecs)` specifies the initial number of records to write to a variable in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value identifying a variable in the file. Variable numbers are zero-based.

`numRecs`

Numeric value specifying the number of records to write.

Examples

Create a CDF, create a variable, and then specify the number of records to write for the variable. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Grades','cdf_int1',1,[],true,[]);
```

```
% Specify the number of records to write for the variable
cdflib.setVarInitialRecs(cdfid,varNum,100);

recsWritten = cdflib.getVarNumRecsWritten(cdfid,varNum)

recsWritten =

   100

%  Clean up
cdflib.delete(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetzVarInitialRecs`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.createVar`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setVarPadValue

Specify pad value used with variable

Syntax

```
cdflib.setVarPadValue(cdfId,varNum,padvalue)
```

Description

`cdflib.setVarPadValue(cdfId,varNum,padvalue)` specifies the pad value used with a variable in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value identifying a variable in the file. Variable numbers are zero-based.

`padValue`

Value to use a pad value for the variable. The data type of the pad value must match the data type of the variable.

Examples

Create a CDF, create a variable in the CDF, and then set the pad value used with the variable. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create a variable in the file.
```

```
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);

% Get the current pad value used with the variable
padval = cdflib.getVarPadValue(cdfid,varNum)

padval =

    0

% Change the pad value for the variable
cdflib.setVarPadValue(cdfid,varNum,int8(1));

% Check the new pad value.
padval = cdflib.getVarPadValue(cdfid,varNum)

padval =

    1

%  Clean up
cdflib.delete(cdfid)

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetzVarPadValue`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarPadValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.SetVarReservePercent

Specify reserve percentage for variable

Syntax

```
cdflib.setVarReservePercent(cdfId,varNum,percent)
```

Description

`cdflib.setVarReservePercent(cdfId,varNum,percent)` specifies the compression reserve percentage for a variable in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value identifying a variable in the file. Variable identifiers (variable numbers) are zero-based.

`percent`

Numeric value specifying the amount of extra space to allocate for a compressed variable, expressed as a percentage. You can specify values between`0` (no extra space is reserved) and `100`, or values greater than `100`. The value specifies the percentage of the uncompressed size of the variable. If you specify a fractional reserve percentages, the library rounds the value down.

Examples

Create a CDF, create a variable, set the compression of the variable, and then set the reserve percent for the variable. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);

% Set the compression of the variable.
cdflib.setVarCompression(cdfid,varNum,'GZIP_COMPRESSION',8);

% Set the compression reserver percentage
cdflib.setVarReservePercent(cdfid,varNum, 80);

cdflib.close(cdfid);
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

Definitions

reserve percentage

Specifies how much extra space to allocate for a compressed variable. This extra space allows the variable to expand when you write additional records to the variable. If you do not specify this room for growth, the library has to move the variable to the end of the file when the size expands and the space at the original location of the variable becomes wasted space.

References

This function corresponds to the CDF library C API routine `CDFsetzVarReservePercent`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarReservePercent` | `cdflib.setVarCompression` | `cdflib.getVarCompression`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setVarsCacheSize

Specify number of cache buffers used for all variables

Syntax

```
cdflib.setVarsCacheSize(cdfId,varNum,numBuffers)
```

Description

`cdflib.setVarsCacheSize(cdfId,varNum,numBuffers)` specifies the number of cache buffers the CDF library uses for all the variables in the multifile format Common Data Format (CDF) file.

This function is not applicable to single-file CDFs. For more information about caching, see the *CDF User's Guide*.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Numeric value identifying a variable in the file. Variable identifiers (variable numbers) are zero-based.

`numBuffers`

Numeric value specifying the cache buffers.

Examples

Create a multifile CDF and specify the number of buffers used for all variables. To run this example, you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf')
```

```
% Set the format of the file to be multi-file
cdflib.setFormat(cdfid,'MULTI_FILE');

% Create a variable in the file
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);

% Note how the library creates a separate file for the variable
ls your_file.*

your_file.cdf  your_file.z0

% Determine the number of cache buffers used with the variable
numBuf = cdflib.getVarCacheSize(cdfid,varNum)

numBuf =

     1

% Specify the number of cache buffers used by all variables in CDF.
cdflib.setVarsCacheSize(cdfid,6)

% Check the number of cache buffers used with the variable.
numBuf = cdflib.getVarCacheSize(cdfid,varNum)

numBuf =

     6

%  Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetzVarsCacheSize`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarCacheSize` | `cdflib.setVarCacheSize`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdflib.setVarSparseRecords

Specify how variable handles sparse records

Syntax

```
cdflib.getVarSparseRecords(cdfId,varNum,stype)
```

Description

`cdflib.getVarSparseRecords(cdfId,varNum,stype)` specifies the sparse records type of a variable in a Common Data Format (CDF) file.

Input Arguments

`cdfId`

Identifier of a CDF file, returned by a call to `cdflib.create` or `cdflib.open`.

`varNum`

Number that identifies the variable to be set. Variable numbers are zero-based.

`stype`

One of the following character vectors, or its numeric equivalent, that specifies how the variable handles sparse records.

Value	Description
`'NO_SPARSERECORDS'`	No sparse records
`'PAD_SPARSERECORDS'`	For sparse records, the library uses the variable's pad value when reading values from a missing record.
`'PREV_SPARSERECORDS'`	For sparse records, the library uses values from the previous existing record when reading values from a missing record. If there is no previous existing record, the library uses the variable's pad value.

To get the numeric equivalent of the constants specified by these character vectors, use the `cdflib.getConstantValue` function.

Examples

Open a multifile CDF and close a variable.

Create a CDF, create a variable, and set the sparse records type of the variable. To run this example you must be in a writable folder.

```
cdfid = cdflib.create('your_file.cdf');

% Create a variable in the file.
varNum = cdflib.createVar(cdfid,'Time','cdf_int1',1,[],true,[]);

% Set the sparse records type of the variable
cdflib.setVarSparseRecords(cdfid,varNum,'PAD_SPARSERECORDS');

% Check the sparse records type of the variable
stype = cdflib.getVarSparseRecords(cdfid,varNum)

stype =

PAD_SPARSERECORDS


%Clean up
cdflib.delete(cdfid);

clear cdfid
```

Tutorials

- "Import CDF Files Using Low-Level Functions"
- "Export to CDF Files"

References

This function corresponds to the CDF library C API routine `CDFsetzVarSparseRecords`.

To use this function, you must be familiar with the CDF C interface. Read the CDF documentation at the CDF website.

For copyright information, see the `cdfcopyright.txt` file.

See Also

`cdflib.getVarSparseRecords` | `cdflib.getConstantValue`

Topics

"Import CDF Files Using Low-Level Functions"
"Export to CDF Files"

cdfread

Read data from Common Data Format (CDF) file

Syntax

```
data = cdfread(filename)
data = cdfread(filename, param1, val1, param2, val2, ...)
[data, info] = cdfread(filename, ...)
```

Description

`data = cdfread(filename)` reads all the data from the Common Data Format (CDF) file specified by the character vector `filename`. CDF data sets typically contain a set of variables, of a specific data type, each with an associated set of records. The variable might represent time values with each record representing a specific time that an observation was recorded. `cdfread` returns all the data in a cell array where each column represents a variable and each row represents a record associated with a variable. If the variables have varying numbers of associated records, `cdfread` pads the rows to create a rectangular cell array, using pad values defined in the CDF file.

Note Because `cdfread` creates temporary files, the current working directory must be writeable.

`data = cdfread(filename, param1, val1, param2, val2, ...)` reads data from the file, where *`param1`*, *`param2`*, and so on, can be any of the parameters listed in the following table.

`[data, info] = cdfread(filename, ...)` returns details about the CDF file in the `info` structure.

Parameter	Value
`'Records'`	A vector specifying which records to read. Record numbers are zero-based. `cdfread` returns a cell array with the same number of rows as the number of records read and as many columns as there are variables.

Parameter	Value
`'Variables'`	A 1-by-*n* or *n*-by-1 cell array specifying the names of the variables to read from the file. *n* must be less than or equal to the total number of variables in the file. `cdfread` returns a cell array with the same number of columns as the number of variables read, and a row for each record read.
`'Slices'`	An *m*-by-3 array, where each row specifies where to start reading along a particular dimension of a variable, the skip interval to use on that dimension (every item, every other item, etc.), and the total number of values to read on that dimension. *m* must be less than or equal to the number of dimensions of the variable. If *m* is less than the total number of dimensions, `cdfread` reads every value from the unspecified dimensions (`[0 1 n]`, where *n* is the total number of elements in the dimension. Note: Because the `'Slices'` parameter describes how to process a single variable, it must be used in conjunction with the `'Variables'` parameter.
`'ConvertEpochToDatenum'`	A Boolean value that determines whether `cdfread` automatically converts CDF epoch data types to MATLAB serial date numbers. If set to `false` (the default), `cdfread` wraps epoch values in MATLAB `cdfepoch` objects. Note: For better performance when reading large data sets, set this parameter to `true`.

Parameter	Value
`'CombineRecords'`	A Boolean value that determines how `cdfread` returns the CDF data sets read from the file. If set to `false` (the default), `cdfread` stores the data in an *m*-by-*n* cell array, where *m* is the number of records and *n* is the number of variables requested. If set to `true`, `cdfread` combines all records for a particular variable into one cell in the output cell array. In this cell, `cdfread` stores scalar data as a column array. `cdfread` extends the dimensionality of nonscalar and string data. For example, instead of creating 1000 elements containing 20-by-30 arrays for each record, `cdfread` stores all the records in one cell as a 1000-by-20-by-30 array Note: If you use the `'Records'` parameter to specify which records to read, you cannot use the `'CombineRecords'` parameter. Note: When using the `'Variable'` parameter to read one variable, if the `'CombineRecords'` parameter is `true`, `cdfread` returns the data as an M-by-N numeric or character array; it does not put the data into a cell array.

Note: To improve performance when working with large data files, use the `'ConvertEpochToDatenum'` and `'CombineRecords'` options.

Note: To improve performance, turn off the file validation which the CDF library does by default when opening files. For more information, see `cdflib.setValidate`.

Examples

Read all the data from a CDF file.

```
data = cdfread('example.cdf');
```

Read the data from the variable `'Time'`.

```
data = cdfread('example.cdf', 'Variable', {'Time'});
```

Read the first value in the first dimension, the second value in the second dimension, the first and third values in the third dimension, and all values in the remaining dimension of the variable `'multidimensional'`.

```
data = cdfread('example.cdf', ...
               'Variable', {'multidimensional'}, ...
               'Slices', [0 1 1; 1 1 1; 0 2 2]);
```

This is similar to reading the whole variable into `data` and then using matrix indexing, as in the following.

```
data{1}(1, 2, [1 3], :)
```

Collapse the records from a data set and convert CDF epoch data types to MATLAB serial date numbers.

```
data = cdfread('example.cdf', ...
               'CombineRecords', true, ...
               'ConvertEpochToDatenum', true);
```

Limitations

- The `cdfread` function does not support non-ASCII encoded data. All the variable names, attributes names, variable values, and attribute values in the CDF file must have 7-bit ASCII encoding. Attempting to read non-ASCII encoded files results in errors or data with corrupted characters.

See Also

`cdfepoch` | `cdfinfo` | `cdflib.setValidate`

Topics

"Import CDF Files Using Low-Level Functions"

Introduced before R2006a

cdfwrite

Write data to Common Data Format (CDF) file

Note: `cdfwrite` is not recommended. Use the `cdflib` low-level functions instead.

Syntax

```
cdfwrite(filename,variablelist)
cdfwrite(...,'PadValues',padvals)
cdfwrite(...,'GlobalAttributes',gattrib)
cdfwrite(..., 'VariableAttributes', vattrib)
cdfwrite(...,'WriteMode',mode)
cdfwrite(...,'Format',format)
```

Description

`cdfwrite(filename,variablelist)` writes out a Common Data Format (CDF) file, to the file name indicated in `filename`. Specify `filename` as a character vector. The `variablelist` argument is a cell array of ordered pairs, each of which comprises a CDF variable name (specified as a character vector) and the corresponding CDF variable value. To write out multiple records for a variable, put the values in a cell array where each element in the cell array represents a record.

Note Because `cdfwrite` creates temporary files, both the destination directory for the file and the current working directory must be writeable.

`cdfwrite(...,'PadValues',padvals)` writes out pad values for given variable names. `padvals` is a cell array of ordered pairs, each of which comprises a variable name (specified as a character vector) and a corresponding pad value. Pad values are the default values associated with the variable when an out-of-bounds record is accessed. Variable names that appear in `padvals` must appear in `variablelist`.

`cdfwrite(...,'GlobalAttributes',gattrib)` writes the structure `gattrib` as global metadata for the CDF file. Each field of the structure is the name of a global attribute. The value of each field contains the value of the attribute. To write out multiple values for an attribute, put the values in a cell array where each element in the cell array represents a record.

Note To specify a global attribute name that is invalid in your MATLAB application, create a field called `'CDFAttributeRename'` in the attribute structure. The value of this field must have a value that is a cell array of ordered pairs. The ordered pair consists of the name of the original attribute, as listed in the `GlobalAttributes` structure, and the corresponding name of the attribute to be written to the CDF file.

`cdfwrite(..., 'VariableAttributes', vattrib)` writes the structure `vattrib` as variable metadata for the CDF. Each field of the struct is the name of a variable attribute. The value of each field should be an M-by-2 cell array where M is the number of variables with attributes. The first element in the cell array should be the name of the variable and the second element should be the value of the attribute for that variable.

Note To specify a variable attribute name that is illegal in MATLAB, create a field called `'CDFAttributeRename'` in the attribute structure. The value of this field must have a value that is a cell array of ordered pairs. The ordered pair consists of the name of the original attribute, as listed in the `VariableAttributes` struct, and the corresponding name of the attribute to be written to the CDF file. If you are specifying a variable attribute of a CDF variable that you are renaming, the name of the variable in the `VariableAttributes` structure must be the same as the renamed variable.

`cdfwrite(...,'WriteMode',`*`mode`*`)`, where *`mode`* is either `'overwrite'` or `'append'`, indicates whether or not the specified variables should be appended to the CDF file if the file already exists. By default, `cdfwrite` overwrites existing variables and attributes.

`cdfwrite(...,'Format',`*`format`*`)`, where *`format`* is either `'multifile'` or `'singlefile'`, indicates whether or not the data is written out as a multifile CDF. In a multifile CDF, each variable is stored in a separate file with the name `*.vN`, where `N` is the number of the variable that is written out to the CDF. By default, `cdfwrite` writes out a single file CDF. When `'WriteMode'` is set to `'Append'`, the `'Format'` option is ignored, and the format of the preexisting CDF is used.

Examples

Write out a file `'example.cdf'` containing a variable `'Longitude'` with the value `[0:360]`.

```
cdfwrite('example', {'Longitude', 0:360});
```

Write out a file `'example.cdf'` containing variables `'Longitude'` and `'Latitude'` with the variable `'Latitude'` having a pad value of 10 for all out-of-bounds records that are accessed.

```
cdfwrite('example', {'Longitude', 0:360, 'Latitude', 10:20}, ...
         'PadValues', {'Latitude', 10});
```

Write out a file `'example.cdf'`, containing a variable `'Longitude'` with the value `[0:360]`, and with a variable attribute of `'validmin'` with the value 10.

```
varAttribStruct.validmin = {'Longitude' [10]};
cdfwrite('example', {'Longitude' 0:360}, 'VariableAttributes', ...
         varAttribStruct);
```

Limitations

- CDF files do not support non-ASCII encoded inputs. Variable names, attributes names, variable values, and attribute values must have 7-bit ASCII encoding. Attempting to write non-ASCII encoded inputs results in errors or data with corrupted characters.

See Also

`cdfread` | `cdfinfo` | `cdfepoch`

Introduced before R2006a

ceil

Round toward positive infinity

Syntax

```
Y = ceil(X)
```

```
Y = ceil(t)
Y = ceil(t,unit)
```

Description

`Y = ceil(X)` rounds each element of `X` to the nearest integer greater than or equal to that element.

`Y = ceil(t)` rounds each element of the `duration` array `t` to the nearest number of seconds greater than or equal to that element.

`Y = ceil(t,unit)` rounds each element of `t` to the nearest number of the specified unit of time greater than or equal to that element.

Examples

Round Matrix Elements Toward Positive Infinity

```
X = [-1.9 -0.2 3.4; 5.6 7 2.4+3.6i];
Y = ceil(X)
```

```
Y =
  -1.0000 + 0.0000i   0.0000 + 0.0000i   4.0000 + 0.0000i
   6.0000 + 0.0000i   7.0000 + 0.0000i   3.0000 + 4.0000i
```

Round Duration Values Toward Positive Infinity

Round each value in a duration array to the nearest number of seconds greater than or equal to that value.

```
t = hours(8) + minutes(29:31) + seconds(1.23);
t.Format = 'hh:mm:ss.SS'
```

```
t = 1×3 duration array
   08:29:01.23   08:30:01.23   08:31:01.23
```

```
Y1 = ceil(t)
```

```
Y1 = 1×3 duration array
   08:29:02.00   08:30:02.00   08:31:02.00
```

Round each value in t to the nearest number of hours greater than or equal to that value.

```
Y2 = ceil(t,'hours')
```

```
Y2 = 1×3 duration array
   09:00:00.00   09:00:00.00   09:00:00.00
```

Input Arguments

X — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. For complex `X`, `ceil` treats the real and imaginary parts independently.

`ceil` converts logical and `char` elements of `X` into `double` values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char` | `logical`
Complex Number Support: Yes

t — Input duration

`duration` array

Input duration, specified as a `duration` array.

unit — Unit of time

`'seconds'` (default) | `'minutes'` | `'hours'` | `'days'` | `'years'`

Unit of time, specified as `'seconds'`, `'minutes'`, `'hours'`, `'days'`, or `'years'`. A duration of 1 year is equal to exactly 365.2425 24-hour days.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`fix` | `floor` | `round`

Topics

“Integers”
“Floating-Point Numbers”

Introduced before R2006a

cell

Create cell array

Syntax

```
C = cell(n)
C = cell(sz1,...,szN)
C = cell(sz)

D = cell(obj)
```

Description

`C = cell(n)` returns an `n`-by-`n` cell array of empty matrices.

`C = cell(sz1,...,szN)` returns a `sz1`-by-...-by-`szN` cell array of empty matrices where `sz1,...,szN` indicate the size of each dimension. For example, `cell(2,3)` returns a 2-by-3 cell array.

`C = cell(sz)` returns a cell array of empty matrices where size vector `sz` defines `size(C)`. For example, `cell([2 3])` returns a 2-by-3 cell array.

`D = cell(obj)` converts a Java array or .NET `System.String` or `System.Object` array into a MATLAB cell array.

Examples

Square Cell Array

Create a 3-by-3 cell array of empty matrices.

```
C = cell(3)
```

```
C = 3×3 cell array
    []    []    []
```

```
    []    []    []
    []    []    []
```

3-D Cell Array

Create a 3-by-4-by-2 cell array of empty matrices.

```
C = cell(3,4,2);
size(C)
```

```
ans =

     3     4     2
```

Clone Size from Existing Array

Create a cell array of empty matrices that is the same size as an existing array.

```
A = [7 9; 2 1; 8 3];
sz = size(A);
C = cell(sz)
```

```
C = 3×2 cell array
    []    []
    []    []
    []    []
```

It is a common pattern to combine the previous two lines of code into a single line.

```
C = cell(size(A));
```

Cell Array from Java Array

Convert an array of `java.lang.String` objects into a cell array.

```
X = java_array('java.lang.String', 3);
X(1) = java.lang.String('one');
X(2) = java.lang.String('two');
```

```
X(3) = java.lang.String('three');
D = cell(X)
```

```
D =

    'one'
    'two'
    'three'
```

Cell Array from .NET Array

Convert a .NET array of `System.Double` objects into a cell array.

```
N = NET.createArray('System.Double[]',2);
N(1) = [13 7 30];
N(2) = 42;
D = cell(N)
```

```
D =

    [1x3 double]    [42]
```

- "Create Cell Array"
- "Preallocate Memory for Cell Array"
- "Access Data in Cell Array"
- "Use Python list Type in MATLAB"

Input Arguments

n — Size of square cell array

integer value

Size of a square cell array, specified as an integer value.

- If `n` is `0`, then `C` is an empty cell array.
- If `n` is negative, then it is treated as `0`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz1,...,szN` — Size of each dimension (as separate arguments)

integer values

Size of each dimension, specified as separate arguments of integer values.

- If the size of any dimension is `0`, then `C` is an empty cell array.
- If the size of any dimension is negative, then it is treated as `0`.
- Beyond the second dimension, `cell` ignores trailing dimensions with a size of 1. For example, `cell([3,1,1,1])` produces a 3-by-1 cell array of empty matrices.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz` — Size of each dimension (as a row vector)

integer values

Size of each dimension, specified as a row vector of integer values. Each element of this vector indicates the size of the corresponding dimension.

- If the size of any dimension is `0`, then `C` is an empty cell array.
- If the size of any dimension is negative, then it is treated as `0`.
- Beyond the second dimension, `cell` ignores trailing dimensions with a size of 1. For example, `cell([3,1,1,1])` produces a 3-by-1 cell array of empty matrices.

Example: `sz = [2, 3, 4]` creates a 2-by-3-by-4 cell array of empty matrices.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`obj` — Input array

Java array or object | .NET array of type `System.String` or `System.Object` | Python® sequence type

Input array, specified as:

- Java array or object
- .NET array of type `System.String` or `System.Object`
- Python sequence type

Output Arguments

`C` — Output array
cell array

Output array, returned as a cell array. Each cell contains an empty, 0-by-0 array of type `double`.

`D` — Converted array
cell array

Converted array, returned as a cell array.

Each cell contains a MATLAB type closest to the Java or .NET type. For more information, see:

- "Handle Data Returned from Java Methods"
- ".NET Type to MATLAB Type Mapping"

Tips

There are two ways to create cell arrays of empty matrices.

- Create a cell array of empty matrices, and specify its size, using the `cell` function.

  ```
  C = cell(3,4,2);
  ```

- Assign an empty array to the last cell of a new cell array. All the other cells also contain empty matrices.

  ```
  C{3,4,2} = [];
  ```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- See “Cell Array Limitations for Code Generation” (MATLAB Coder).

See Also

See Also

`num2cell` | `table2cell`

Topics

“Create Cell Array”
“Preallocate Memory for Cell Array”
“Access Data in Cell Array”
“Use Python list Type in MATLAB”
“cell Function Syntax for System.Object[,] Arrays”

Introduced before R2006a

cell2mat

Convert cell array to ordinary array of the underlying data type

Syntax

```
A = cell2mat(C)
```

Description

`A = cell2mat(C)` converts a cell array into an ordinary array. The elements of the cell array must all contain the same data type, and the resulting array is of that data type.

The contents of `C` must support concatenation into an N-dimensional rectangle. Otherwise, the results are undefined. For example, the contents of cells in the same column must have the same number of columns, although they need not have the same number of rows (see figure).

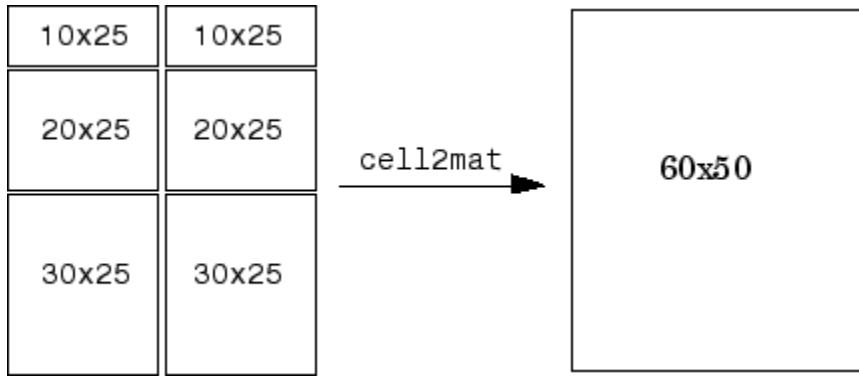

Examples

Convert Cell Array to Numeric Array

Convert numeric arrays in four cells of a cell array into one numeric array.

```
C = {[1],    [2 3 4];
     [5; 9], [6 7 8; 10 11 12]}
```

```
C = 2×2 cell array
    [         1]    [1×3 double]
    [2×1 double]    [2×3 double]
```

```
A = cell2mat(C)
```

```
A =

     1     2     3     4
     5     6     7     8
     9    10    11    12
```

Convert Cell Array of Structures to Array

Convert structures in a cell array into one structure array. The structures must have the same fields.

```
s1.a = [1 2 3 4];
s1.b = 'Good';
s2.a = [5 6; 7 8];
s2.b = 'Morning';
c = {s1,s2};
d = cell2mat(c)
```

```
d = 1×2 struct array with fields:
    a
    b
```

Display the first field of structure `d(1)`.

```
d(1).a
```

```
ans =

     1     2     3     4
```

Display the second field of `d(2)`.

```
d(2).b
```

```
ans =
'Morning'
```

Input Arguments

C — Input cell array

cell array

Input cell array, in which all cells contain the same data type. `cell2mat` accepts numeric or character data within cells of `C`, or structures with the same field names and data types. `cell2mat` does not accept objects or nested cells within `C`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`cell` | `cell2struct` | `cell2table` | `iscell` | `mat2cell` | `num2cell` | `struct2cell` | `table2cell`

Introduced before R2006a

cell2struct

Convert cell array to structure array

Syntax

```
structArray = cell2struct(cellArray, fields, dim)
```

Description

`structArray = cell2struct(cellArray, fields, dim)` creates a structure array, `structArray`, from the information contained within cell array `cellArray`.

The `fields` argument specifies field names for the structure array. This argument is a character array or a cell array of character vectors.

The `dim` argument tells MATLAB which axis of the cell array to use in creating the structure array. Use a numeric `double` to specify `dim`.

To create a structure array with fields derived from `N` rows of a cell array, specify `N` field names in the `fields` argument, and the number 1 in the `dim` argument. To create a structure array with fields derived from `M` columns of a cell array, specify `M` field names in the `fields` argument and the number 2 in the `dim` argument.

The `structArray` output is a structure array with `N` fields, where `N` is equal to the number of fields in the `fields` input argument. The number of fields in the resulting structure must equal the number of cells along dimension `dim` that you want to convert.

Examples

Create the following table for use with the examples in this section. The table lists information about the employees of a small Engineering company. Reading the table by rows shows the names of employees by department. Reading the table by columns shows the number of years each employee has worked at the company.

	5 Years	10 Years	15 Years
Development	Lee, Reed, Hill	Dean, Frye	Lane, Fox, King

	5 Years	10 Years	15 Years
Sales	Howe, Burns	Kirby, Ford	Hall
Management	Price	Clark, Shea	Sims
Quality	Bates, Gray	Nash	Kay, Chase
Documentation	Lloyd, Young	Ryan, Hart, Roy	Marsh

Enter the following commands to create the initial cell array `employees`:

```
devel = {{'Lee','Reed','Hill'}, {'Dean','Frye'}, ...
   {'Lane','Fox','King'}};
sales = {{'Howe','Burns'}, {'Kirby','Ford'}, {'Hall'}};
mgmt = {{'Price'}, {'Clark','Shea'}, {'Sims'}};
qual = {{'Bates','Gray'}, {'Nash'}, {'Kay','Chase'}};
docu = {{'Lloyd','Young'}, {'Ryan','Hart','Roy'}, {'Marsh'}};

employees = [devel; sales; mgmt; qual; docu]
employees =

    {1x3 cell}    {1x2 cell}    {1x3 cell}
    {1x2 cell}    {1x2 cell}    {1x1 cell}
    {1x1 cell}    {1x2 cell}    {1x1 cell}
    {1x2 cell}    {1x1 cell}    {1x2 cell}
    {1x2 cell}    {1x3 cell}    {1x1 cell}
```

This is the resulting cell array:

	fiveYears	tenYears	fifteenYears
development	Lee Reed Hill	Dean Frye	Lane Fox King
sales	Howe Burns	Kirby Ford	Hall
management	Price	Clark Shea	Sims
quality	Bates Gray	Nash	Kay Chase
documentation	Young Lloyd	Ryan Hart Roy	Marsh

5 x 3 cell array

Convert the cell array to a struct along dimension 1:

1. Convert the 5-by-3 cell array along its first dimension to construct a 3-by-1 struct array with 5 fields. Each of the rows along dimension 1 of the cell array becomes a field in the struct array:

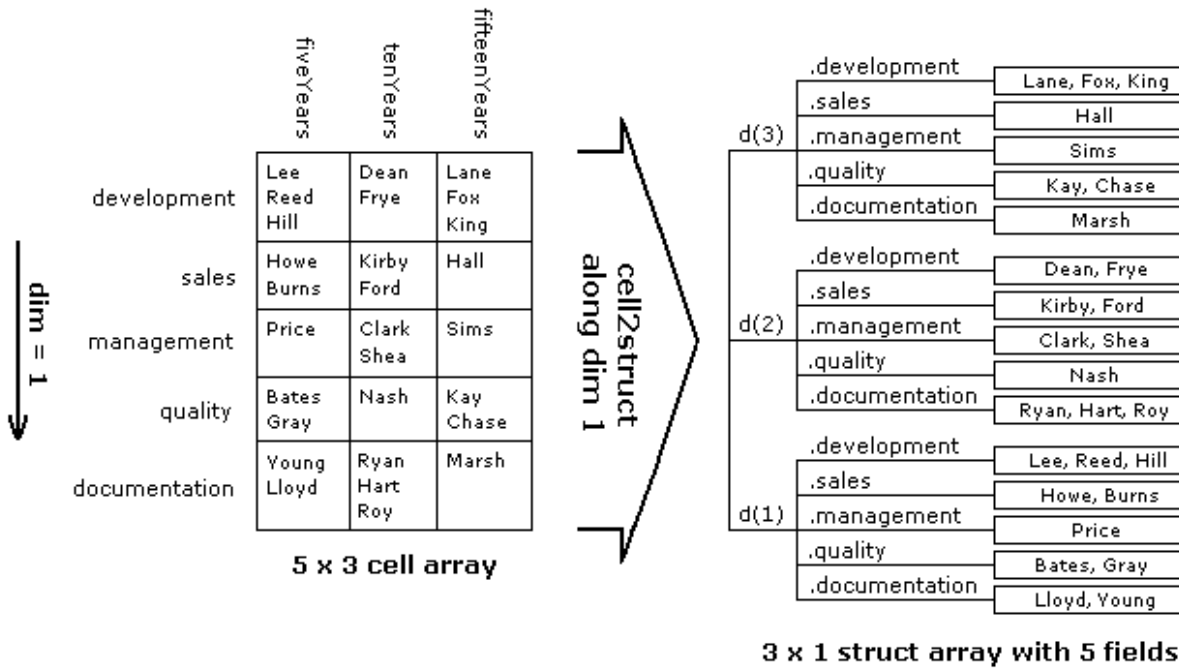

Traversing the first (i.e., vertical) dimension, there are 5 rows with row headings that read as follows:

```
rowHeadings = {'development', 'sales', 'management', ...
   'quality', 'documentation'};
```

2 Convert the cell array to a struct array, `depts`, in reference to this dimension:

```
depts = cell2struct(employees, rowHeadings, 1)
depts =
3x1 struct array with fields:
    development
    sales
    management
    quality
    documentation
```

3 Use this row-oriented structure to find the names of the Development staff who have been with the company for up to 10 years:

```
depts(1:2).development
ans =
    'Lee'    'Reed'    'Hill'
ans =
    'Dean'    'Frye'
```

Convert the same cell array to a struct along dimension 2:

1. Convert the 5-by-3 cell array along its second dimension to construct a 5-by-1 struct array with 3 fields. Each of the columns along dimension 2 of the cell array becomes a field in the struct array:

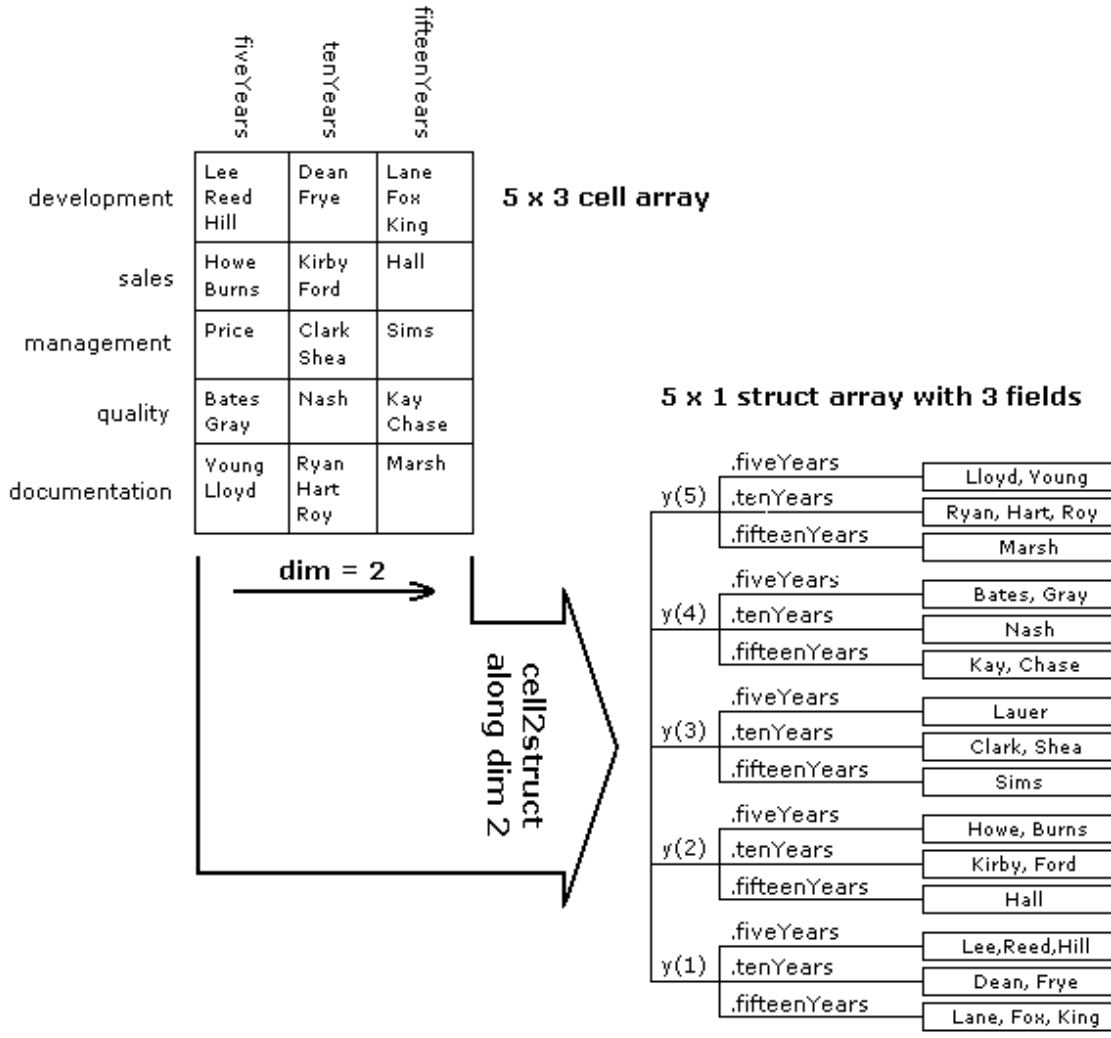

2 Traverse the cell array along the second (or horizontal) dimension. The column headings become fields of the resulting structure:

```
colHeadings = {'fiveYears' 'tenYears' 'fifteenYears'};
```

```
years = cell2struct(employees, colHeadings, 2)
years =
5x1 struct array with fields:
    fiveYears
    tenYears
    fifteenYears
```

3 Using the column-oriented structure, show how many employees from the Sales and Documentation departments have worked for the company for at least 5 years:

```
[~, sales_5years, ~, ~, docu_5years] = years.fiveYears
sales_5years =
    'Howe'    'Burns'
docu_5years =
    'Lloyd'    'Young'
```

Convert only part of the cell array to a struct:

1 Convert only the first and last rows of the cell array. This results in a 3-by-1 struct array with 2 fields:

```
rowHeadings = {'development', 'documentation'};

depts = cell2struct(employees([1,5],:), rowHeadings, 1)
depts =
3x1 struct array with fields:
    development
    documentation
```

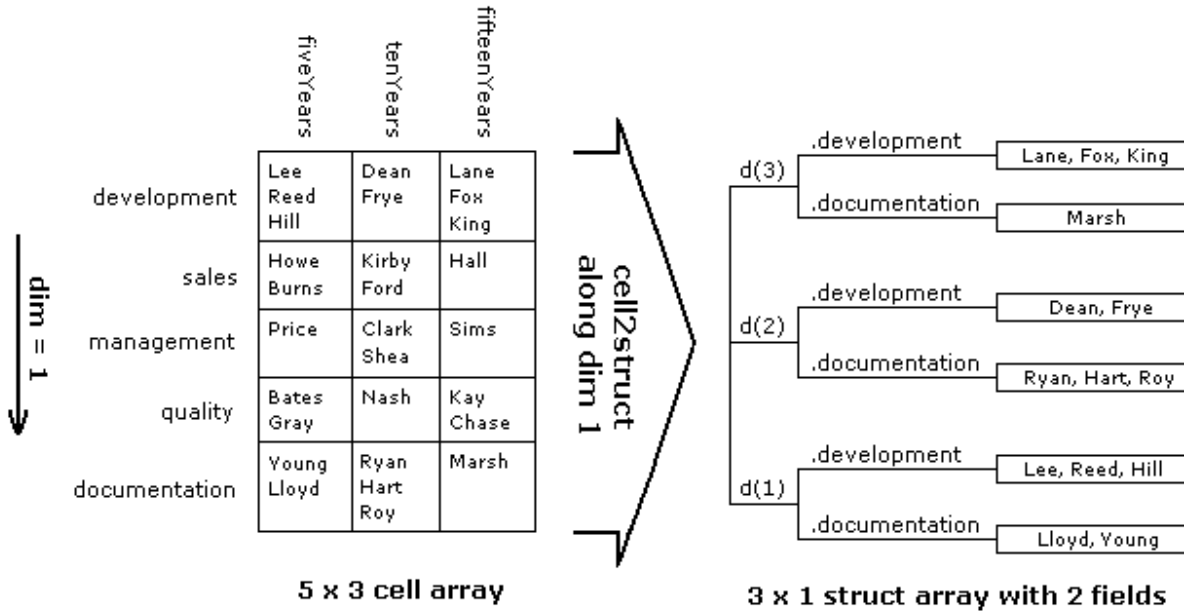

2 Display those employees who belong to these departments for all three periods of time:

```
for k=1:3
   depts(k,:)
end

ans =
      development: {'Lee'  'Reed'  'Hill'}
    documentation: {'Lloyd'  'Young'}
ans =
      development: {'Dean'  'Frye'}
    documentation: {'Ryan'  'Hart'  'Roy'}
ans =
      development: {'Lane'  'Fox'  'King'}
    documentation: {'Marsh'}
```

See Also

`struct2cell` | `cell2table` | `table2struct` | `cell` | `iscell` | `struct` | `isstruct` | `fieldnames`

Topics

dynamic field names

Introduced before R2006a

cell2table

Convert cell array to table

Syntax

```
T = cell2table(C)
T = cell2table(C,Name,Value)
```

Description

`T = cell2table(C)` converts the contents of an `m`-by-`n` cell array, `C`, to an `m`-by-`n` table, `T`. Each variable in the table, `T`, is numeric, with a data type `double`, or a cell array of character vectors.

`cell2table` uses the input array name appended with the column number for the variable names in the table. If these names are not valid MATLAB identifiers, `cell2table` uses character vectors of the form `'Var1',...,'VarN'` where *N* is the number of columns in `C`.

`T = cell2table(C,Name,Value)` creates a table from a cell array, `C`, with additional options specified by one or more `Name,Value` pair arguments.

For example, you can specify row names or variable names to include in the table.

Examples

Convert Cell Array to Table

Create a cell array containing character vectors and numeric data.

```
C = {5 'cereal' 110 'C+'; 12 'pizza' 140 'B';...
    23 'salmon' 367 'A'; 2 'cookies' 160 'D'}
```

```
C = 4×4 cell array
    [ 5]    'cereal'     [110]    'C+'
    [12]    'pizza'      [140]    'B'
    [23]    'salmon'     [367]    'A'
    [ 2]    'cookies'    [160]    'D'
```

Convert the cell array, C, to a table and specify variable names.

```
T = cell2table(C,...
    'VariableNames',{'Age' 'FavoriteFood' 'Calories' 'NutritionGrade'})
```

```
T = 4×4 table
    Age    FavoriteFood    Calories    NutritionGrade
    ___    ____________    ________    ______________

     5     'cereal'        110         'C+'
    12     'pizza'         140         'B'
    23     'salmon'        367         'A'
     2     'cookies'       160         'D'
```

The variables T.Age and T.Calories are numeric while the variables T.FavoriteFood and T.NutritionGrade are cell arrays of character vectors.

Convert Column Headings to Variable Names

Convert a cell array to a table, and then include the first row from the cell array as variable names for the table.

Create a cell array where the first row contains character vectors to identify column headings.

```
Patients = {'Gender' 'Age' 'Height' 'Weight' 'Smoker';...
    'M' 38 71 176 true;...
    'M' 43 69 163 false;...
    'M' 38 64 131 false;...
    'F' 38 64 131 false;...
    'F' 40 67 133 false;...
    'F' 49 64 119 false}
```

```
Patients = 7×5 cell array
    'Gender'    'Age'    'Height'    'Weight'    'Smoker'
    'M'         [ 38]    [    71]    [   176]    [     1]
    'M'         [ 43]    [    69]    [   163]    [     0]
    'M'         [ 38]    [    64]    [   131]    [     0]
    'F'         [ 38]    [    64]    [   131]    [     0]
    'F'         [ 40]    [    67]    [   133]    [     0]
    'F'         [ 49]    [    64]    [   119]    [     0]
```

Exclude the columns headings and convert the contents of the cell array to a table.

```
C = Patients(2:end,:);
T = cell2table(C)
```

```
T = 6×5 table
    C1     C2    C3    C4      C5
    ___    __    __    ___    _____

    'M'    38    71    176    true
    'M'    43    69    163    false
    'M'    38    64    131    false
    'F'    38    64    131    false
    'F'    40    67    133    false
    'F'    49    64    119    false
```

The table, `T`, has variable names `C1,...,C5`.

Change the variable names by setting the table property, `T.Properties.VariableNames`, to the first row of the cell array.

```
T.Properties.VariableNames = Patients(1,:)
```

```
T = 6×5 table
    Gender    Age    Height    Weight    Smoker
    ______    ___    ______    ______    ______

    'M'       38     71        176       true
    'M'       43     69        163       false
    'M'       38     64        131       false
    'F'       38     64        131       false
    'F'       40     67        133       false
    'F'       49     64        119       false
```

- “Access Data in a Table”

Input Arguments

`C` — Input cell array

2-D cell array

Input cell array, specified as a 2-D cell array.

If the cell contents have compatible sizes and types, then `cell2table` vertically concatenates the contents of the cells in each column of `C` to create each variable in `T`. If the cell contents have different sizes or incompatible types, then the corresponding variable in the table, `T`, is a column of cells.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `RowNames',{'row1','row2','row3'}` uses the row names, `row1`, `row2`, and `row3` for the table, `T`.

`'RowNames'` — Row names for `T`
`{}` (default) | cell array of character vectors

Row names for `T`, specified as the comma-separated pair consisting of `'RowNames'` and a cell array of character vectors that are nonempty and distinct. The number of character vectors must equal the number of rows, `size(C,1)`.

`'VariableNames'` — Variable names for `T`
cell array of character vectors

Variable names for `T`, specified as the comma-separated pair consisting of `'VariableNames'` and a cell array of character vectors that are nonempty and distinct. The number of character vectors must equal the number of variables, `size(C,2)`.

Furthermore, the variable names must be valid MATLAB identifiers. If valid MATLAB identifiers are not available for use as variable names, MATLAB uses a cell array of `N` character vectors of the form `{'Var1' ... 'VarN'}`, where *N* is the number of variables. You can determine valid MATLAB variable names using the function `isvarname`.

Output Arguments

`T` — Output table
table

Output table, returned as a table. The table can store metadata such as descriptions, variable units, variable names, and row names. For more information, see Table Properties.

See Also

See Also

`array2table` | `isvarname` | `struct2table` | `table` | `table2cell`

Topics

"Access Data in a Table"

Introduced in R2013b

celldisp

Display cell array contents

Syntax

```
celldisp(C)
celldisp(C, name)
```

Description

`celldisp(C)` recursively displays the contents of a cell array.

`celldisp(C, name)` uses the character vector *`name`* for the display instead of the name of the first input (or `ans`).

Examples

Use `celldisp` to display the contents of a 2-by-3 cell array:

```
C = {[1 2] 'Tony' 3+4i; [1 2;3 4] -5 'abc'};
celldisp(C)

C{1,1} =
     1     2

C{2,1} =
     1     2
     3     4

C{1,2} =
Tony

C{2,2} =
    -5

C{1,3} =
   3.0000+ 4.0000i
```

```
C{2,3} =
abc
```

See Also

cellplot

Topics

"Export Cell Array to Text File"

Introduced before R2006a

cellfun

Apply function to each cell in cell array

Syntax

```
[A1,...,Am] = cellfun(func,C1,...,Cn)
[A1,...,Am] = cellfun(func,C1,...,Cn,Name,Value)
```

Description

`[A1,...,Am] = cellfun(func,C1,...,Cn)` calls the function specified by function handle `func` and passes elements from cell arrays `C1,...,Cn`, where `n` is the number of inputs to function `func`. Output arrays `A1,...,Am`, where `m` is the number of outputs from function `func`, contain the combined outputs from the function calls. The `i`th iteration corresponds to the syntax `[A1(i),...,Am(i)] = func(C1{i},...,Cn{i})`. The `cellfun` function does not perform the calls to function `func` in a specific order.

`[A1,...,Am] = cellfun(func,C1,...,Cn,Name,Value)` calls function `func` with additional options specified by one or more `Name,Value` pair arguments. Possible values for `Name` are `'UniformOutput'` or `'ErrorHandler'`.

Input Arguments

`func`

Handle to a function that accepts `n` input arguments and returns `m` output arguments.

If function `func` corresponds to more than one function file (that is, if `func` represents a set of overloaded functions), MATLAB determines which function to call based on the class of the input arguments.

Backward Compatibility

`cellfun` accepts a character vector as `func`, rather than a function handle, for these function names: `isempty`, `islogical`, `isreal`, `length`, `ndims`, `prodofsize`, `size`, `isclass`. Enclose the function name in single quotes.

If you specify a function name rather than a function handle:

- `cellfun` does not call any overloaded versions of the function.
- The `size` and `isclass` functions require additional inputs to the `cellfun` function:

  `A = cellfun('size', C, k)` returns the size along the `k`th dimension of each element of `C`.

  `A = cellfun('isclass', C, classname)` returns logical `1` (`true`) for each element of `C` that matches the `classname` argument. This syntax returns logical 0 (`false`) for objects that are a subclass of `classname`.

`C1,...,Cn`

Cell arrays that contain the `n` inputs required for function `func`. Each cell array must have the same dimensions.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'UniformOutput'`

Logical value, as follows:

`true (1)`	Indicates that for all inputs, each output from function `func` is a scalar cell array, scalar structure, or a scalar value that is always of the same type and size. The `cellfun` function combines the outputs in arrays `A1,...,Am`, where `m` is the number of function outputs. Each output array is of the same type as the individual function outputs.
`false (0)`	Requests that the `cellfun` function combine the outputs into cell arrays `A1,...,Am`. The outputs of function `func` can be of any size or type.

Default: `true`

'ErrorHandler'

Handle to a function that catches any errors that occur when MATLAB attempts to execute function `func`. Define this function so that it rethrows the error or returns valid outputs for function `func`.

MATLAB calls the specified error-handling function with two input arguments:

- A structure with these fields:

`identifier`	Error identifier.
`message`	Error message text.
`index`	Linear index corresponding to the element of the input cell array at the time of the error.

- The set of input arguments to function `func` at the time of the error.

Output Arguments

`A1,...,Am`

Arrays that collect the `m` outputs from function `func`. Each array `A` is the same size as each of the inputs `C1,...,Cn`.

Function `func` can return output arguments of different classes. However, if `UniformOutput` is `true` (the default):

- The individual outputs from function `func` must be scalar values (numeric, logical, or character), scalar structures, or scalar cell arrays.
- The class of a particular output argument must be the same for each set of inputs. The class of the corresponding output array is the same as the class of the outputs from function `func`.

Examples

Compute the mean of each vector in cell array `C`.

```
C = {1:10, [2; 4; 6], []};
```

```
averages = cellfun(@mean, C)
```

This code returns

```
averages =
    5.5000    4.0000       NaN
```

Compute the size of each array in `C`, created in the previous example.

```
[nrows, ncols] = cellfun(@size, C)
```

This code returns

```
nrows =
     1     3     0
ncols =
    10     1     0
```

Create a cell array that contains character vectors, and abbreviate each of them to their first three characters. Because the output character vectors are nonscalar, set `UniformOutput` to `false`.

```
days = {'Monday', 'Tuesday', 'Wednesday', 'Thursday', 'Friday'};

abbrev = cellfun(@(x) x(1:3), days, 'UniformOutput', false)
```

The syntax `@(x)` creates an anonymous function. This code returns

```
abbrev =
    'Mon'    'Tue'    'Wed'    'Thu'    'Fri'
```

Compute the covariance between arrays in two cell arrays `C` and `D`. Because the covariance output is nonscalar, set `UniformOutput` to `false`.

```
c1 = rand(5,1);  c2 = rand(10,1);  c3 = rand(15,1);
d1 = rand(5,1);  d2 = rand(10,1);  d3 = rand(15,1);
C = {c1, c2, c3};
D = {d1, d2, d3};

covCD = cellfun(@cov, C, D, 'UniformOutput', false)
```

This code returns

```
covCD =
```

```
    [2x2 double]    [2x2 double]    [2x2 double]
```

Define and call a custom error handling function.

```
function result = errorfun(S, varargin)
   warning(S.identifier, S.message);
   result = NaN;
end

A = {rand(3)};
B = {rand(5)};
AgtB = cellfun(@(x,y) x > y, A, B, 'ErrorHandler', @errorfun, ...
               'UniformOutput', false)
```

Tutorials

- "Anonymous Functions"
- "Create Function Handle"

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- The input function must be a function handle.
- The input function must not rely on any state, such as `persistent` variables or random number functions like `rand`.
- The `'ErrorHandler'` name-value pair is not supported.
- With the `'UniformOutput'` name-value pair, the outputs from the specified function must be numeric, logical, characters, or cell arrays.

For more information, see "Tall Arrays".

See Also

`arrayfun` | `spfun` | `cell2mat` | `structfun` | `splitapply`

Topics

"Anonymous Functions"
"Create Function Handle"

Introduced before R2006a

cellplot

Graphically display structure of cell array

Syntax

```
cellplot(c)
cellplot(c, 'legend')
handles = cellplot(c)
```

Description

`cellplot(c)` displays a figure window that graphically represents the contents of `c`. Filled rectangles represent elements of vectors and arrays, while scalars and short character vectors are displayed as text.

`cellplot(c, 'legend')` places a colorbar next to the plot labelled to identify the data types in `c`.

`handles = cellplot(c)` displays a figure window and returns a vector of surface handles.

Limitations

The `cellplot` function can display only two-dimensional cell arrays.

Examples

Consider a 2-by-2 cell array containing a matrix, a vector, and two character vectors:

```
c{1,1} = '2-by-2';
c{1,2} = 'eigenvalues of eye(2)';
c{2,1} = eye(2);
c{2,2} = eig(eye(2));
```

The command `cellplot(c)` produces

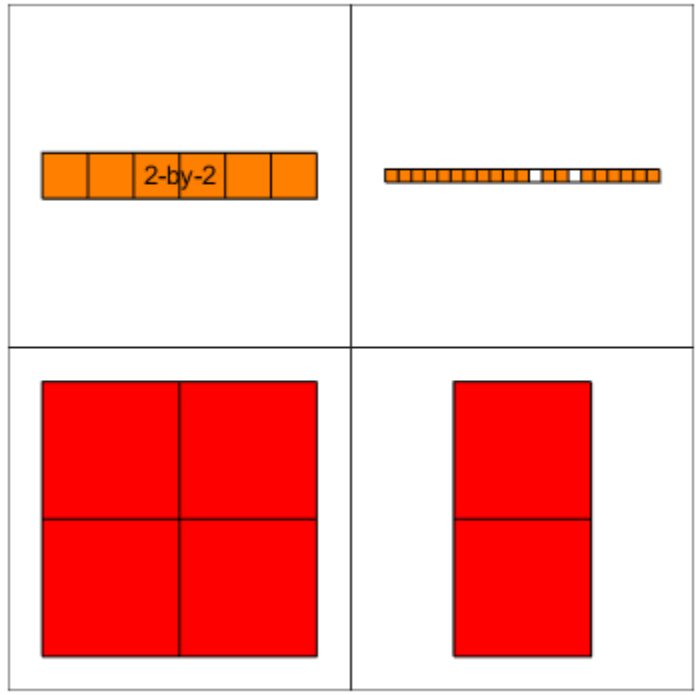

See Also

`celldisp`

Topics

"Export Cell Array to Text File"

Introduced before R2006a

cellstr

Convert to cell array of character vectors

Syntax

```
C = cellstr(S)
```

```
S = cellstr(D)
S = cellstr(D,fmt)
S = cellstr(D,fmt,locale)
```

Description

`C = cellstr(S)` converts array `S` to a cell array.

- If `S` is a character array, then each row of `S` is a cell of `C`. The `cellstr` function removes trailing whitespace characters in the rows of `S`, except for significant whitespace such as nonbreaking space characters. Use the `char` function to convert back into a character array.
- If `S` is a cell array of character vectors, then `cellstr` returns `S` unaltered.
- If `S` is a categorical array, then `cellstr` converts each element to a character vector and assigns it to a cell. The size of the cell array is the same as the size of `S`.
- Starting in R2016b, if `S` is a string array, then `cellstr` converts each element to a character vector and assigns it to a cell. The size of the cell array is the same as the size of `S`. Use the `string` function to convert back into a string array.

`S = cellstr(D)` converts a datetime, duration, or calendar duration array into a cell array of character vectors in the format specified by the `Format` property of `D`. The output has the same dimensions as `D`.

`S = cellstr(D,fmt)` represents dates or durations in the specified format. For example, `cellstr(D,'HH:mm:ss')` represents the times associated with each element of `D`.

`S = cellstr(D,fmt,locale)` represents dates or durations in the specified locale. For example, `cellstr(D,'dd-MMM-yyyy','en_US')` represents the dates associated

with each element of D using the en_US locale. The locale affects the language used to represent character vectors such as month and day names.

Examples

Convert String Array to Cell Array

You can create string arrays to contain multiple pieces of text. However, you might need to use functions that accept cell arrays of character vectors as input arguments, and that do not accept string arrays. To pass data from a string array to such functions, use the cellstr function to convert the string array to a cell array of character vectors.

Create a string array. Starting in R2017a, you can create strings using double quotes instead of the string function.

```
S = ["Past","Present","Future"]
```

```
S = 1×3 string array
    "Past"    "Present"    "Future"
```

Convert the string array to a 1-by-3 cell array of character vectors.

```
C = cellstr(S)
```

```
C = 1×3 cell array
    'Past'    'Present'    'Future'
```

Text processing functions (such as strfind and regexp) accept string arrays as inputs, but other functions (for example, addpath) do not.

Convert Character Array to Cell Array

Create a character array. Include trailing spaces so that each row has the same length, resulting in a 3-by-4 array.

```
S = ['abc ';'defg';'hi  ']
```

```
S = 3×4 char array
    'abc '
```

```
    'defg'
    'hi  '
```

```
class(S)
```

```
ans =
'char'
```

Convert the character array to a 3-by-1 cell array of character vectors.

```
C = cellstr(S)
```

```
C = 3×1 cell array
    'abc'
    'defg'
    'hi'
```

```
class(C)
```

```
ans =
'cell'
```

Convert Calendar Duration Array to Cell Array

Create a `calendarDuration` array.

```
D = calmonths(15:17) + caldays(8) + hours(1.2345)
```

```
D = 1×3 calendarDuration array
   1y 3mo 8d 1h 14m 4.2s   1y 4mo 8d 1h 14m 4.2s   1y 5mo 8d 1h 14m 4.2s
```

Convert the array to a cell array of character vectors.

```
C = cellstr(D)
```

```
C = 1×3 cell array
    '1y 3mo 8d 1h 14m 4.2s'    '1y 4mo 8d 1h 14m 4.2s'    '1y 5mo 8d 1h 14m 4.2s'
```

```
class(C)
```

```
ans =
'cell'
```

Input Arguments

S — Input array

string array | character array | cell array of character vectors | categorical array

Input array, specified as a string array, a character array, a cell array of character vectors, or a categorical array.

Starting in R2016b, S can be a string array. cellstr converts each element of S to a character vector and then assigns it to a cell of C.

If S is a character array, then each row of S becomes a separate cell of C, with trailing spaces removed. cellstr does not remove trailing spaces that are nonbreaking space characters.

If S is a cell array of character vectors, then cellstr returns S unaltered.

If S is a categorical array, then cellstr converts each element to a character vector and assigns it to a cell.

Data Types: string | char | cell | categorical

D — Input date and time

date or duration array

Input date and time, specified as a date or duration array.

Data Types: datetime | duration | calendarDuration

fmt — Date and time format

[ ] (default) | character vector

Date and time format, specified as a character vector. The supported formats depend on the data type of input D.

- datetime formats can include combinations of units and delimiters, such as 'yyyy-MMM-dd HH:mm:ss.SSS'. For details, see the Format property for datetime arrays.
- duration formats are either single characters ('y', 'd', 'h', 'm', or 's') or one of these combinations:
  - 'dd:hh:mm:ss'

  - `'hh:mm:ss'`
  - `'mm:ss'`
  - `'hh:mm'`
  - Any of the above, with up to nine `S` characters to indicate fractional second digits, such as `'hh:mm:ss.SSSS'`
- `calendarDuration` formats can include combinations of the characters `'y'`, `'q'`, `'m'`, `'w'`, `'d'`, and `'t'` in order from largest to smallest unit of time, such as `'ym'`.

For more information on the `duration` and `calendarDuration` formats, see "Set Date and Time Display Format".

`locale` — Locale of the character vectors to create

character vector

Locale of the character vectors to create, specified as a character vector.

`locale` can be:

- `'system'`, to specify your system locale.
- a character vector in the form *`xx_YY`*, where *`xx`* is a lowercase ISO 639-1 two-letter code that specifies a language, and *`YY`* is an uppercase ISO 3166-1 alpha-2 code that specifies a country.

These are the same character vectors accepted by the `'Locale'` name-value pair argument for the `datetime` function. The locale affects the language used in the output array.

Example: `'en_US'`

Example: `'ja_JP'`

Algorithms

`cellstr` does not remove trailing whitespace characters from character arrays when the characters are significant whitespace, such as nonbreaking space characters.

This table shows the most common characters that are significant whitespace characters and their descriptions. For more information, see Whitespace character.

Significant Whitespace Character	Description
`char(133)`	Next line
`char(160)`	Nonbreaking space
`char(8199)`	Figure space
`char(8239)`	Narrow no-break space

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`char` | `iscellstr` | `isstrprop` | `string` | `strsplit`

Introduced before R2006a

cgs

Conjugate gradients squared method

Syntax

```
x = cgs(A,b)
cgs(A,b,tol)
cgs(A,b,tol,maxit)
cgs(A,b,tol,maxit,M)
cgs(A,b,tol,maxit,M1,M2)
cgs(A,b,tol,maxit,M1,M2,x0)
[x,flag] = cgs(A,b,...)
[x,flag,relres] = cgs(A,b,...)
[x,flag,relres,iter] = cgs(A,b,...)
[x,flag,relres,iter,resvec] = cgs(A,b,...)
```

Description

`x = cgs(A,b)` attempts to solve the system of linear equations `A*x = b` for `x`. The `n`-by-`n` coefficient matrix `A` must be square and should be large and sparse. The column vector `b` must have length `n`. You can specify `A` as a function handle, `afun`, such that `afun(x)` returns `A*x`.

"Parameterizing Functions" explains how to provide additional parameters to the function `afun`, as well as the preconditioner function `mfun` described below, if necessary.

If `cgs` converges, a message to that effect is displayed. If `cgs` fails to converge after the maximum number of iterations or halts for any reason, a warning message is printed displaying the relative residual `norm(b-A*x)/norm(b)` and the iteration number at which the method stopped or failed.

`cgs(A,b,tol)` specifies the tolerance of the method, `tol`. If `tol` is `[]`, then `cgs` uses the default, `1e-6`.

`cgs(A,b,tol,maxit)` specifies the maximum number of iterations, `maxit`. If `maxit` is `[]` then `cgs` uses the default, `min(n,20)`.

`cgs(A,b,tol,maxit,M)` and `cgs(A,b,tol,maxit,M1,M2)` use the preconditioner `M` or `M = M1*M2` and effectively solve the system `inv(M)*A*x = inv(M)*b` for `x`. If `M` is `[]` then `cgs` applies no preconditioner. `M` can be a function handle `mfun` such that `mfun(x)` returns `M\x`.

`cgs(A,b,tol,maxit,M1,M2,x0)` specifies the initial guess `x0`. If `x0` is `[]`, then `cgs` uses the default, an all-zero vector.

`[x,flag] = cgs(A,b,...)` returns a solution `x` and a flag that describes the convergence of `cgs`.

Flag	Convergence
0	`cgs` converged to the desired tolerance `tol` within `maxit`iterations.
1	`cgs` iterated `maxit` times but did not converge.
2	Preconditioner `M` was ill-conditioned.
3	`cgs` stagnated. (Two consecutive iterates were the same.)
4	One of the scalar quantities calculated during `cgs` became too small or too large to continue computing.

Whenever `flag` is not `0`, the solution `x` returned is that with minimal norm residual computed over all the iterations. No messages are displayed if the `flag` output is specified.

`[x,flag,relres] = cgs(A,b,...)` also returns the relative residual `norm(b-A*x)/norm(b)`. If `flag` is `0`, then `relres <= tol`.

`[x,flag,relres,iter] = cgs(A,b,...)` also returns the iteration number at which `x` was computed, where `0 <= iter <= maxit`.

`[x,flag,relres,iter,resvec] = cgs(A,b,...)` also returns a vector of the residual norms at each iteration, including `norm(b-A*x0)`.

Examples

Using cgs with a Matrix Input

```
A = gallery('wilk',21);
```

```
b = sum(A,2);
tol = 1e-12;  maxit = 15;
M1 = diag([10:-1:1 1 1:10]);
x = cgs(A,b,tol,maxit,M1);
```

displays the message

```
cgs converged at iteration 13 to a solution with
relative residual 2.4e-016.
```

Using cgs with a Function Handle

This example replaces the matrix `A` in the previous example with a handle to a matrix-vector product function `afun`, and the preconditioner `M1` with a handle to a backsolve function `mfun`. The example is contained in the file `run_cgs` that

- Calls `cgs` with the function handle `@afun` as its first argument.
- Contains `afun` as a nested function, so that all variables in `run_cgs` are available to `afun` and `myfun`.

The following shows the code for `run_cgs`:

```
function x1 = run_cgs
n = 21;
b = afun(ones(n,1));
tol = 1e-12;  maxit = 15;
x1 = cgs(@afun,b,tol,maxit,@mfun);

    function y = afun(x)
        y = [0; x(1:n-1)] + ...
              [((n-1)/2:-1:0)'; (1:(n-1)/2)'].*x + ...
              [x(2:n); 0];
    end

    function y = mfun(r)
        y = r ./ [((n-1)/2:-1:1)'; 1; (1:(n-1)/2)'];
    end
end
```

When you enter

```
x1 = run_cgs
```

MATLAB software returns

```
cgs converged at iteration 13 to a solution with
relative residual 2.4e-016.
```

Using cgs with a Preconditioner.

This example demonstrates the use of a preconditioner.

Load `west0479`, a real 479-by-479 nonsymmetric sparse matrix.

```
load west0479;
A = west0479;
```

Define `b` so that the true solution is a vector of all ones.

```
b = full(sum(A,2));
```

Set the tolerance and maximum number of iterations.

```
tol = 1e-12;
maxit = 20;
```

Use `cgs` to find a solution at the requested tolerance and number of iterations.

```
[x0,fl0,rr0,it0,rv0] = cgs(A,b,tol,maxit);
```

`fl0` is 1 because `cgs` does not converge to the requested tolerance `1e-12` within the requested 20 iterations. In fact, the behavior of `cgs` is so poor that the initial guess (`x0 = zeros(size(A,2),1)` is the best solution and is returned as indicated by `it0 = 0`. MATLAB stores the residual history in `rv0`.

Plot the behavior of `cgs`.

```
semilogy(0:maxit,rv0/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

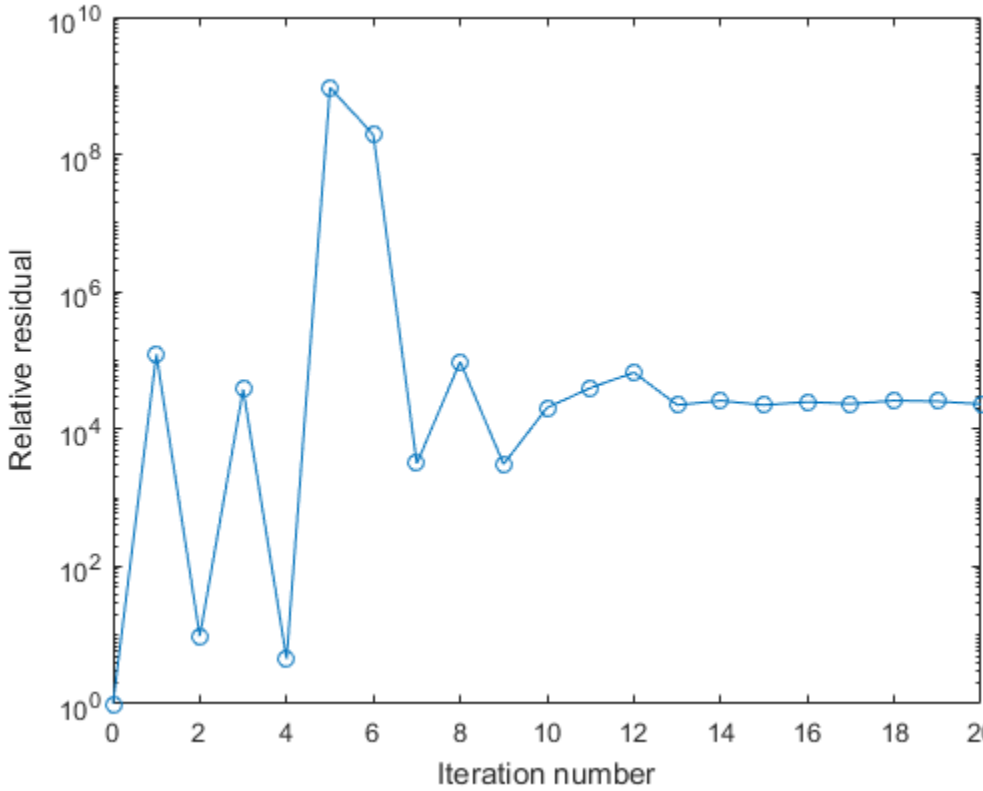

The plot shows that the solution does not converge. You can use a preconditioner to improve the outcome.

Create a preconditioner with `ilu`, since `A` is nonsymmetric.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-5));
```

```
Error using ilu
There is a pivot equal to zero.  Consider decreasing the
drop tolerance or consider using the 'udiag' option.
```

MATLAB cannot construct the incomplete LU as it would result in a singular factor, which is useless as a preconditioner.

You can try again with a reduced drop tolerance, as indicated by the error message.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-6));
[x1,fl1,rr1,it1,rv1] = cgs(A,b,tol,maxit,L,U);
```

`fl1` is 0 because `cgs` drives the relative residual to `4.3851e-014` (the value of `rr1`). The relative residual is less than the prescribed tolerance of `1e-12` at the third iteration (the value of `it1`) when preconditioned by the incomplete LU factorization with a drop tolerance of `1e-6`. The output `rv1(1)` is `norm(b)` and the output `rv1(14)` is `norm(b-A*x2)`.

You can follow the progress of `cgs` by plotting the relative residuals at each iteration starting from the initial estimate (iterate number 0).

```
semilogy(0:it1,rv1/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

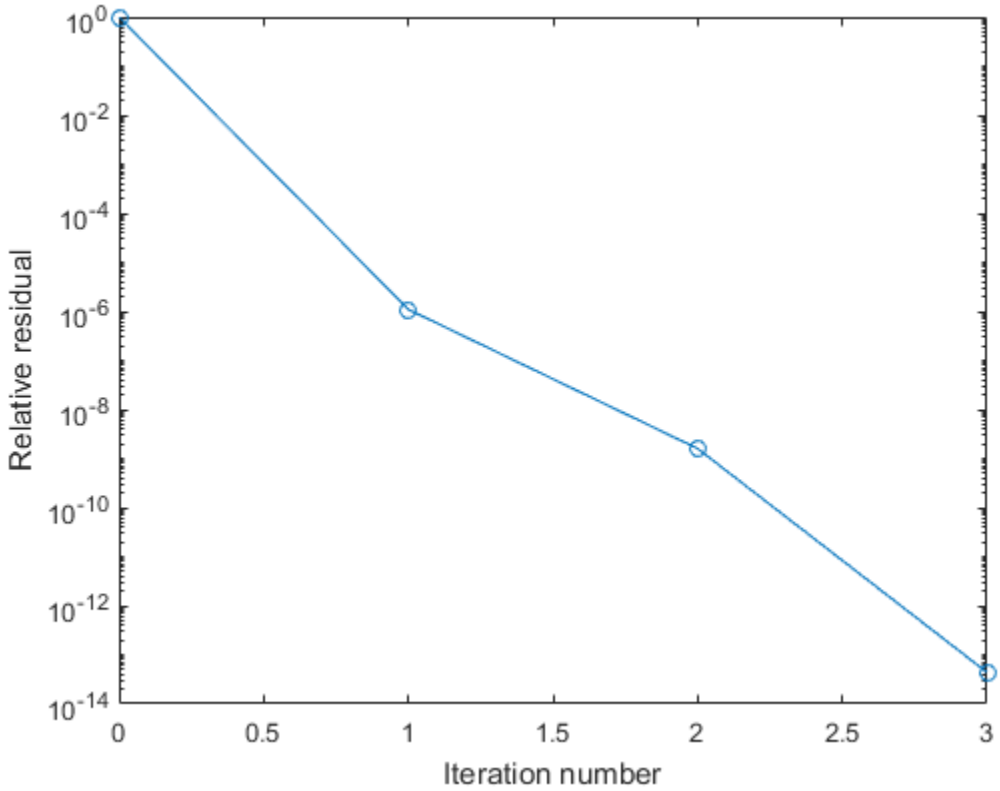

References

[1] Barrett, R., M. Berry, T. F. Chan, et al., *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*, SIAM, Philadelphia, 1994.

[2] Sonneveld, Peter, "CGS: A fast Lanczos-type solver for nonsymmetric linear systems," *SIAM J. Sci. Stat. Comput.*, January 1989, Vol. 10, No. 1, pp. 36–52.

See Also

See Also

`bicg` | `bicgstab` | `gmres` | `ilu` | `lsqr` | `minres` | `mldivide` | `pcg` | `qmr` | `symmlq`

Topics

"Create Function Handle"

Introduced before R2006a

char

Convert to character array

Syntax

```
S = char(A)
S = char(A1,...,AN)
```

```
S = char(D)
S = char(D,fmt)
S = char(D,fmt,locale)
```

Description

`S = char(A)` converts array `A` into a character array.

- If `A` is a numeric array, then `char` converts numbers into characters. Valid numeric values range from 0 to 65535 and correspond to Unicode® code units. Values from 0 to 127 also correspond to 7-bit ASCII characters.
- If `A` is a character array, then `char` returns `A` unaltered.

  To convert characters into a numeric array, use a function that converts to a numeric type (for example, `double`, `int32`, or `cast`).
- Starting in R2016b, if `A` is a string array, then `char` converts the string array into a character array. `char` converts each string element of `A` into a character vector, and then concatenates the vectors to produce a character array, automatically padded with blank spaces as needed. As a result, `S` has one more dimension than `A`.

  To convert `S` to a string array, use the `string` function.
- If `A` is a cell array of character arrays, then `char` converts the cell array into a character array. Each row from each character array in the cell array become a row in `S`, automatically padded with blank spaces as needed.

  To convert `S` into a cell array of character vectors, use the `cellstr` function.
- If `A` is a categorical array, then `char` converts each element of `A` into a row of a character array, in column order.

`S = char(A1,...,AN)` converts the arrays `A1,...,AN` into a single character array. After conversion to characters, the input arrays become rows in `S`. The `char` function pads rows with blank spaces as needed. If any input array is an empty character array, then the corresponding row in `S` is a row of blank spaces.

The input arrays `A1,...,AN` cannot be string arrays, cell arrays, or categorical arrays.

`A1,...,AN` can be of different sizes and shapes.

`S = char(D)` converts a datetime, duration, or calendar duration array into a character array in the format specified by the `Format` property of `D`. The output contains one date or duration in each row.

`S = char(D,fmt)` represents dates or durations in the specified format, such as `'HH:mm:ss'`.

`S = char(D,fmt,locale)` represents dates or durations in the specified locale, such as `'en_US'`. The locale affects the language used to represent character vectors such as month and day names.

Examples

Convert String Array to Character Array

Create a string array and convert it to a character array using the `char` function. Starting in R2017a, you can create strings using double quotes instead of the `string` function. `char` pads the rows of the output with blanks as needed.

```
A = ["Elizabeth";"Jan";"";"Sandra"]
```

```
A = 4×1 string array
    "Elizabeth"
    "Jan"
    ""
    "Sandra"
```

```
S = char(A)
```

```
S = 4×9 char array
    'Elizabeth'
    'Jan      '
    '         '
```

```
    'Sandra   '
```

Text processing functions (such as `strfind` and `regexp`) accept string arrays as inputs, but other functions (for example, `addpath`) do not.

Convert Integers to Printable ASCII Character Array

Convert the integers 32–127 into a 3-by-32 array of the printable ASCII characters.

```
A = (32:127);
S = char(A);
S = reshape(S,32,3)'
```

```
S = 3×32 char array
    ' !"#$%&'()*+,-./0123456789:;<=>?'
    '@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_'
    '`abcdefghijklmnopqrstuvwxyz{|}~'
```

Convert Multiple Arrays to Character Array

Convert multiple arrays into a single character array. The input arrays need not have the same shape.

```
A1 = [65 66; 67 68];
A2 = 'abcd';
S = char(A1,A2)
```

```
S = 3×4 char array
    'AB  '
    'CD  '
    'abcd'
```

Because the input arrays do not have the same number of columns, `char` pads the rows from `A1` with blanks.

```
whos S
```

```
  Name      Size            Bytes  Class    Attributes

  S         3x4                24  char
```

Convert Cell Array to Character Array

Convert a cell array of character vectors into a character array.

```
A = {'ABCD','efghijk','','LM'};
S = char(A)
```

```
S = 4×7 char array
    'ABCD   '
    'efghijk'
    '       '
    'LM     '
```

Because the character vectors from cell array A have different lengths, `char` pads S with blanks where needed. `char` pads the third row with seven blanks, because the third cell of A contains an empty character array.

```
whos S
```

```
  Name      Size            Bytes  Class    Attributes

  S         4x7                56  char
```

Convert Duration Array to Character Array

Create a `duration` array.

```
D = hours(23:25) + minutes(8) + seconds(1.2345)
```

```
D = 1×3 duration array
   23.134 hr   24.134 hr   25.134 hr
```

Convert D to a character array.

```
S = char(D)
```

```
S = 3×9 char array
    '23.134 hr'
    '24.134 hr'
    '25.134 hr'
```

S is a character array with one duration value per row.

Specify the format of the duration values in S.

```
S = char(D,'hh:mm')
```

```
S = 3×5 char array
```

```
'23:08'
'24:08'
'25:08'
```

Input Arguments

A — Input array

string array | numeric array | character array | cell array of character arrays | categorical array

Input array, specified as a string array, a numeric array, a character array, a cell array of character arrays, or a categorical array.

Starting in R2016b, A can be a string array.

If A is a numeric array, then:

- Nonintegers are rounded towards zero.
- Values less than 0 are treated as 0.
- Values greater than 65535 are treated as 65535.

Example: `char(65)` converts the integer 65 into the character A.

D — Input date and time

date or duration array

Input date and time, specified as a date or duration array.

Data Types: `datetime` | `duration` | `calendarDuration`

fmt — Date format

character vector

Date format, specified as a character vector. The supported formats depend on the data type of input D.

- `datetime` formats can include combinations of units and delimiters, such as `'yyyy-MMM-dd HH:mm:ss.SSS'`. For details, see the Format property for datetime arrays.
- `duration` formats are either single characters (`'y'`, `'d'`, `'h'`, `'m'`, or `'s'`) or one of these combinations:

  - `'dd:hh:mm:ss'`
  - `'hh:mm:ss'`
  - `'mm:ss'`
  - `'hh:mm'`
  - Any of the above, with up to nine `S` characters to indicate fractional second digits, such as `'hh:mm:ss.SSSS'`
- `calendarDuration` formats can include combinations of the characters `'y'`, `'q'`, `'m'`, `'w'`, `'d'`, and `'t'` in order from largest to smallest unit of time, such as `'ym'`.

For more information on the `duration` and `calendarDuration` formats, see "Set Date and Time Display Format".

`locale` — Locale of the character vectors to create
character vector

Locale of the character vectors to create, specified as a character vector.

`locale` can be:

- `'system'`, to specify your system locale.
- a character vector in the form *`xx_YY`*, where *`xx`* is a lowercase ISO 639-1 two-letter code that specifies a language, and *`YY`* is an uppercase ISO 3166-1 alpha-2 code that specifies a country.

These are the same character vectors accepted by the `'Locale'` name-value pair argument for the `datetime` function. The locale affects the language used in the output array.

Example: `'en_US'`

Example: `'ja_JP'`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- For the syntax `S = char(X)`, the input `X` must be a tall numeric column vector.
- Syntaxes with more than one input are not supported.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input array must be specified as a character array. Cell arrays are not supported.

See Also

See Also

`cellstr` | `iscellstr` | `ischar` | `isletter` | `isspace` | `isstring` | `isstrprop` | `string` | `text`

Topics

"Locale Settings for MATLAB Process"

Introduced before R2006a

checkcode

Check MATLAB code files for possible problems

Syntax

```
checkcode(filename)
checkcode(filename1,...,filenameN)

checkcode(___,option1,...,optionN)

info = checkcode(___,'-struct')
msg = checkcode(___,'-string')
[___, filepaths] = checkcode(___)
```

Description

`checkcode(filename)` displays messages about `filename` that report potential problems and opportunities for code improvement. These messages are sometimes referred to as Code Analyzer messages. The line number in the message is a hyperlink that you can click to go directly to that line in the Editor. The exact text of the `checkcode` messages is subject to some change between versions.

`checkcode(filename1,...,filenameN)` displays messages for each specified `filename`.

`checkcode(___,option1,...,optionN)` modifies the returned messages based on the specified option flags. For example, specify `'-id'` to request the message ID to be returned with each message. You can specify options with any of the input arguments in the previous syntaxes.

`info = checkcode(___,'-struct')` returns the information as an `n`-by-`1` structure array, where `n` is the number of messages found.

`msg = checkcode(___,'-string')` returns the information as a character vector.

If you omit the `'-struct'` or `'-string'` argument and you specify an output argument, the default behavior is `'-struct'`.

`[ ___ , filepaths] = checkcode( ___ )` also returns `filepaths`, the absolute paths to the file names. You can specify `filepaths` with either the `'-struct'` or `'-string'` options.

Examples

Check for Potential Problems in File

Run `checkcode` on the example file `lengthofline.m`. MATLAB® displays the Code Analyzer messages for `lengthofline.m` in the Command Window.

```
checkcode('lengthofline')
```

```
L 21 (C 1-9): The value assigned to variable 'nothandle' might be unused.
L 22 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 23 (C 5-11): The variable 'notline' appears to change size on every loop iteration. C
L 23 (C 44-49): Use STRCMPI(str1,str2) instead of using UPPER/LOWER in a call to STRCMP
L 27 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 33 (C 13-16): The variable 'data' appears to change size on every loop iteration. Con
L 33 (C 24-31): Use dynamic fieldnames with structures instead of GETFIELD.
L 37 (C 29): Use || instead of | as the OR operator in (scalar) conditional statements.
L 38 (C 47): Use || instead of | as the OR operator in (scalar) conditional statements.
L 39 (C 47): Use || instead of | as the OR operator in (scalar) conditional statements.
L 42 (C 13-15): The variable 'dim' appears to change size on every loop iteration. Cons
L 44 (C 13-15): The variable 'dim' appears to change size on every loop iteration. Cons
L 47 (C 52): Invalid syntax at ';'. Possibly, a ), }, or ] is missing.
L 47 (C 53): Invalid syntax at ')'. Possibly, a ), }, or ] is missing.
L 47 (C 54): Parse error at ']': usage might be invalid MATLAB syntax.
L 48 (C 17): Terminate statement with semicolon to suppress output (in functions).
L 48 (C 23): Use of brackets [] is unnecessary. Use parentheses to group, if needed.
```

Store List of Potential Problems

Run `checkcode` on the example file `lengthofline.m`. Include message IDs and store the results in a structure.

```
info = checkcode('lengthofline', '-id')
```

```
info = 17×1 struct array with fields:
    id
    message
```

```
    fix
    line
    column
```

View the values for the first message

```
info(1)
```

```
ans = struct with fields:
         id: 'NASGU'
    message: 'The value assigned to variable 'nothandle' might be unused.'
        fix: 0
       line: 21
     column: [1 9]
```

Display the McCabe Complexity of File

Run `checkcode` on the example file `lengthofline.m` using the `'-cyc'` option. MATLAB® displays the McCabe complexity of the file, followed by the Code Analyzer messages for `lengthofline.m`.

```
checkcode('lengthofline', '-cyc')
```

```
L 1 (C 23-34): The McCabe complexity of 'lengthofline' is 12.
L 21 (C 1-9): The value assigned to variable 'nothandle' might be unused.
L 22 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 23 (C 5-11): The variable 'notline' appears to change size on every loop iteration. C
L 23 (C 44-49): Use STRCMPI(str1,str2) instead of using UPPER/LOWER in a call to STRCMP
L 27 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 33 (C 13-16): The variable 'data' appears to change size on every loop iteration. Con
L 33 (C 24-31): Use dynamic fieldnames with structures instead of GETFIELD.
L 37 (C 29): Use || instead of | as the OR operator in (scalar) conditional statements.
L 38 (C 47): Use || instead of | as the OR operator in (scalar) conditional statements.
L 39 (C 47): Use || instead of | as the OR operator in (scalar) conditional statements.
L 42 (C 13-15): The variable 'dim' appears to change size on every loop iteration. Cons
L 44 (C 13-15): The variable 'dim' appears to change size on every loop iteration. Cons
L 47 (C 52): Invalid syntax at ';'. Possibly, a ), }, or ] is missing.
L 47 (C 53): Invalid syntax at ')'. Possibly, a ), }, or ] is missing.
L 47 (C 54): Parse error at ']': usage might be invalid MATLAB syntax.
L 48 (C 17): Terminate statement with semicolon to suppress output (in functions).
L 48 (C 23): Use of brackets [] is unnecessary. Use parentheses to group, if needed.
```

Suppress Code Analyzer Messages

Suppress specific messages by creating and specifying a settings file. For example, the file `lengthofline.m` includes several lines that use `|` instead of as the `OR` operator. By default, `checkcode` flags these lines.

```
checkcode('lengthofline')
```

```
L 21 (C 1-9): The value assigned to variable 'nothandle' might be unused.
L 22 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 23 (C 5-11): The variable 'notline' appears to change size on every loop iteration. C
L 23 (C 44-49): Use STRCMPI(str1,str2) instead of using UPPER/LOWER in a call to STRCMP
L 27 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 33 (C 13-16): The variable 'data' appears to change size on every loop iteration. Con
L 33 (C 24-31): Use dynamic fieldnames with structures instead of GETFIELD.
L 37 (C 29): Use || instead of | as the OR operator in (scalar) conditional statements.
L 38 (C 47): Use || instead of | as the OR operator in (scalar) conditional statements.
L 39 (C 47): Use || instead of | as the OR operator in (scalar) conditional statements.
L 42 (C 13-15): The variable 'dim' appears to change size on every loop iteration. Cons
L 44 (C 13-15): The variable 'dim' appears to change size on every loop iteration. Cons
L 47 (C 52): Invalid syntax at ';'. Possibly, a ), }, or ] is missing.
L 47 (C 53): Invalid syntax at ')'. Possibly, a ), }, or ] is missing.
L 47 (C 54): Parse error at ']': usage might be invalid MATLAB syntax.
L 48 (C 17): Terminate statement with semicolon to suppress output (in functions).
L 48 (C 23): Use of brackets [] is unnecessary. Use parentheses to group, if needed.
```

Create a settings file that suppresses the message flagging the use of `|` as the `OR` operator.

1. On the **Home** tab, in the **Environment** section, click the **Preferences** button.
2. Select **Code Analyzer** in the left pane.
3. Under **Default Settings**, in the **Aesthetics and Readability** section, clear the message **Use instead of | as the OR operator in (scalar) conditional statements**.
4. Enter `mysettings.txt` as the file name and save it to your current folder.
5. Press the **Cancel** button to the preference panel without changing the active settings.

Run `checkcode` on the example file using the custom settings file `mysettings.txt`. The message **Use instead of | as the OR operator in (scalar) conditional statements** is suppressed and is no longer visible in the list of messages.

```
checkcode('lengthofline','-config=mysettings.txt')
```

```
L 21 (C 1-9): The value assigned to variable 'nothandle' might be unused.
L 22 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 23 (C 5-11): The variable 'notline' appears to change size on every loop iteration. C
L 23 (C 44-49): Use STRCMPI(str1,str2) instead of using UPPER/LOWER in a call to STRCMP
L 27 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 33 (C 13-16): The variable 'data' appears to change size on every loop iteration. Con
L 33 (C 24-31): Use dynamic fieldnames with structures instead of GETFIELD.
L 42 (C 13-15): The variable 'dim' appears to change size on every loop iteration. Cons
L 44 (C 13-15): The variable 'dim' appears to change size on every loop iteration. Cons
L 47 (C 52): Invalid syntax at ';'. Possibly, a ), }, or ] is missing.
L 47 (C 53): Invalid syntax at ')'. Possibly, a ), }, or ] is missing.
L 47 (C 54): Parse error at ']': usage might be invalid MATLAB syntax.
L 48 (C 17): Terminate statement with semicolon to suppress output (in functions).
L 48 (C 23): Use of brackets [] is unnecessary. Use parentheses to group, if needed.
```

Input Arguments

`filename` — File name

character vector | cell array of character vectors

File name, specified as a character vector or a cell array of character vectors. The file name can include a partial path, but must be in a folder on the search path or in the current folder.

If `filename` is a cell array, MATLAB displays information for each file.

Note: You cannot combine cell arrays and character arrays of file names. For example, you cannot have `{'lengthofline', 'buggy'}, 'collatz'` as an input.

Example: `'lengthofline'`

Example: `{'lengthofline', 'buggy'}`

`option` — Display option

`'-id'` | `'-fullpath'` | `'-notok'` | `'-cyc'` | `'-config'`

Display option, specified as one of these values. Options can appear in any order.

Option	Description
`'-id'`	Request the message ID, where ID is a character vector. When returned to a structure, the output also has the `id` field, which is the ID associated with the message.
`'-fullpath'`	Assume that the input file names are absolute paths, so that `checkcode` does not try to locate them.
`'-notok'`	Run `checkcode` for all lines in `filename`, even those lines that end with the `checkcode` suppression directive, `%#ok`. For information on `%#ok` and suppressing messages from within your program, see "Adjust Code Analyzer Message Indicators and Messages".
`'-cyc'`	Display the McCabe complexity (also referred to as cyclomatic complexity) of each function in the file. In general, lower complexity values indicate programs that are easier to understand and modify. Evidence suggests that programs with higher complexity values are more likely to contain errors. Frequently, you can lower the complexity of a function by dividing it into smaller, simpler functions. Some people advocate splitting up programs that have a complexity value over 10.

Option	Description

`'-config=settingsfile'`
 	
`'-config=factory'`
	Override the default active settings file with the specified settings file. If the specified file is not in the current folder, provide the full path to the file.
	
	For information about creating a settings file, see "Save and Reuse Code Analyzer Message Settings". If you specify an invalid file, `checkcode` returns a message indicating that it cannot open or read the file you specified. In that case, `checkcode` uses the factory default settings.
	
	To ignore all settings files and use the factory default preference settings, specify `'-config=factory'`.

Output Arguments

`info` — Message information

structure array | cell array

Message information, returned as a `n`-by-`1` structure array, where `n` is the number of messages returned by the `checkcode` command. If you specify multiple file names as input, or if you specify a cell array as input, `info` contains a cell array of structures.

Field	Description
`message`	Message describing the suspicious construct that code analysis caught.
`line`	Vector of line numbers, indicating which lines of the file the message applies to.
`column`	Two-column array of columns numbers (column extents), indicating which columns of the file the message applies to. The first column of the array specifies the column in the Editor where the message begins. The second column of the array specifies the column in the Editor where the

Field	Description
	message ends. In the two-column array, each occurrence of a message has a row.

`msg` — Message information
character vector

Message information, returned as a character vector. If you specify multiple file names as input, or if you specify a cell array as input, `msg` contains a character vector where the information for each file is separated by 10 equal sign characters, a space, the file name, a space, and 10 equal sign characters.

Example: `========== C:\MyMatlabFiles\buggy.m ==========`

`filepaths` — Absolute paths of files
cell array of character vectors

Absolute paths of files, specified as a cell array of character vectors. MATLAB lists the `filepaths` in the same order as the specified input files.

Tips

To force the Code Analyzer to ignore a line of code, use `%#ok` at the end of the line. You can add comments after the tag.

```
unsuppressed1 = 10  % This line will get caught
suppressed2 = 20  %#ok This line will not get caught
suppressed3 = 30  %#ok This line will not get caught
```

See Also

See Also
`mlintrpt` | `profile`

Topics
"Check Code for Errors and Warnings"

Introduced in R2011b

checkin

(To be removed) Check files into source control system (UNIX platforms)

Note: `checkin` will be removed in a future release.

Syntax

```
checkin('filename','comments','comment_text')
checkin({'filename1','filename2'},'comments','comment_text')
checkin('filename','comments', 'comment_text','option','value')
```

Description

`checkin('filename','comments','comment_text')` checks in the file named `filename` to the source control system. Use the full path for `filename` and include the file extension. You must save the file before checking it in, but the file can be open or closed. The `comment_text` is a MATLAB character vector containing checkin comments for the source control system. You must supply **`comments`** and `comment_text`.

`checkin({'filename1','filename2'},'comments','comment_text')` checks in the files `filename1` through `filenamen` to the source control system. Use the full paths for the files and include file extensions. Comments apply to all files checked in.

`checkin('filename','comments', 'comment_text','option','value')` provides additional `checkin` options. For multiple file names, use an array of character vectors instead of `filename`, that is, `{'filename1','filename2',...}`. Options apply to all file names. The *`option`* and *`value`* arguments are shown in the following table.

option Argument	value Argument	Purpose
`'force'`	`'on'`	`filename` is checked in even if the file has not changed since it was checked out.

option Argument	value Argument	Purpose
`'force'`	`'off'` (default)	`filename` is not checked in if there were no changes since checkout.
`'lock'`	`'on'`	`filename` is checked in with comments, and is automatically checked out.
`'lock'`	`'off'` (default)	`filename` is checked in with comments but does not remain checked out.

Examples

Check In a File

Check the file `/myserver/myfiles/clock.m` into the source control system, with the comment `Adjustment for leapyear`:

```
checkin('/myserver/myfiles/clock.m','comments',...
'Adjustment for leapyear')
```

Check In Multiple Files

Check two files into the source control system, using the same comment for each:

```
checkin({'/myserver/myfiles/clock.m', ...
'/myserver/myfiles/calendar.m'},'comments',...
'Adjustment for leapyear')
```

Check In a File and Keep It Checked Out

Check the file `/myserver/myfiles/clock.m` into the source control system and keep the file checked out:

```
checkin('/myserver/myfiles/clock.m','comments',...
'Adjustment for leapyear','lock','on')
```

Introduced before R2006a

checkout

(To be removed) Check files out of source control system (UNIX platforms)

Note: `checkout` will be removed in a future release.

Syntax

```
checkout('filename')
checkout({'filename1','filename2', ...})
checkout('filename','option','value',...)
```

Description

`checkout('filename')` checks out the file named `filename` from the source control system. Use the full path for `filename` and include the file extension. The file can be open or closed when you use `checkout`.

`checkout({'filename1','filename2', ...})` checks out the files named `filename1` through `filenamen` from the source control system. Use the full paths for the files and include the file extensions.

`checkout('filename','option','value',...)` provides additional `checkout` options. For multiple file names, use a cell array of character vectors instead of `filename`, that is, `{'filename1','filename2', ...}`. Options apply to all file names. The *`option`* and *`value`* arguments are shown in the following table.

option Argument	value Argument	Purpose
`'force'`	`'on'`	The checkout is forced, even if you already have the file checked out. This is effectively an `undocheckout` followed by a `checkout`.

option Argument	value Argument	Purpose
`'force'`	`'off'` (default)	Prevents you from checking out the file if you already have it checked out.
`'lock'`	`'on'` (default)	The checkout gets the file, allows you to write to it, and locks the file so that access to the file for others is read only.
`'lock'`	`'off'`	The checkout gets a read-only version of the file, allowing another user to check out the file for updating. You do not have to check the file in after checking it out with this option.
`'revision'`	`'version_num'`	Checks out the specified revision of the file.

If you end the MATLAB session, the file remains checked out. You can check in the file from within the MATLAB desktop during a later session, or directly from your source control system.

Examples

Check Out a File

Check out the file `/myserver/myfiles/clock.m` from the source control system:

```
checkout('/myserver/myfiles/clock.m')
```

Check Out Multiple Files

Check out `/matlab/myfiles/clock.m` and `/matlab/myfiles/calendar.m` from the source control system:

```
checkout({'/myserver/myfiles/clock.m',...
'/myserver/myfiles/calendar.m'})
```

Force a Checkout, Even If File Is Already Checked Out

Check out `/matlab/myfiles/clock.m` even if `clock.m` is already checked out to you:

```
checkout('/myserver/myfiles/clock.m','force','on')
```

Check Out Specified Revision of File

Check out revision `1.1` of `clock.m`:

```
checkout('/matlab/myfiles/clock.m','revision','1.1')
```

Introduced before R2006a

chol

Cholesky factorization

Syntax

```
R = chol(A)
L = chol(A,'lower')
R = chol(A,'upper')
[R,p] = chol(A)
[L,p] = chol(A,'lower')
[R,p] = chol(A,'upper')
[R,p,S] = chol(A)
[R,p,s] = chol(A,'vector')
[L,p,s] = chol(A,'lower','vector')
[R,p,s] = chol(A,'upper','vector')
```

Description

`R = chol(A)` produces an upper triangular matrix `R` from the diagonal and upper triangle of matrix `A`, satisfying the equation `R'*R=A`. The `chol` function assumes that `A` is (complex Hermitian) symmetric. If it is not, `chol` uses the (complex conjugate) transpose of the upper triangle as the lower triangle. Matrix `A` must be positive definite.

`L = chol(A,'lower')` produces a lower triangular matrix `L` from the diagonal and lower triangle of matrix `A`, satisfying the equation `L*L'=A`. The `chol` function assumes that `A` is (complex Hermitian) symmetric. If it is not, `chol` uses the (complex conjugate) transpose of the lower triangle as the upper triangle. When `A` is sparse, this syntax of `chol` is typically faster. Matrix `A` must be positive definite. `R = chol(A,'upper')` is the same as `R = chol(A)`.

`[R,p] = chol(A)` for positive definite `A`, produces an upper triangular matrix `R` from the diagonal and upper triangle of matrix `A`, satisfying the equation `R'*R=A` and `p` is zero. If `A` is not positive definite, then `p` is a positive integer and MATLAB does not generate an error. When `A` is full, `R` is an upper triangular matrix of order `q=p-1` such that `R'*R=A(1:q,1:q)`. When `A` is sparse, `R` is an upper triangular matrix of size `q`-by-`n`

so that the L-shaped region of the first q rows and first q columns of R'*R agree with those of A.

[L,p] = chol(A,'lower') for positive definite A, produces a lower triangular matrix L from the diagonal and lower triangle of matrix A, satisfying the equation L*L'=A and p is zero. If A is not positive definite, then p is a positive integer and MATLAB does not generate an error. When A is full, L is a lower triangular matrix of order q=p-1 such that L*L'=A(1:q,1:q). When A is sparse, L is a lower triangular matrix of size q-by-n so that the L-shaped region of the first q rows and first q columns of L*L' agree with those of A. [R,p] = chol(A,'upper') is the same as [R,p] = chol(A).

The following three-output syntaxes require sparse input A.

[R,p,S] = chol(A), when A is sparse, returns a permutation matrix S. Note that the preordering S may differ from that obtained from amd since chol will slightly change the ordering for increased performance. When p=0, R is an upper triangular matrix such that R'*R=S'*A*S. When p is not zero, R is an upper triangular matrix of size q-by-n so that the L-shaped region of the first q rows and first q columns of R'*R agree with those of S'*A*S. The factor of S'*A*S tends to be sparser than the factor of A.

[R,p,s] = chol(A,'vector'), when A is sparse, returns the permutation information as a vector s such that A(s,s)=R'*R, when p=0. You can use the 'matrix' option in place of 'vector' to obtain the default behavior.

[L,p,s] = chol(A,'lower','vector'), when A is sparse, uses only the diagonal and the lower triangle of A and returns a lower triangular matrix L and a permutation vector s such that A(s,s)=L*L', when p=0. As above, you can use the 'matrix' option in place of 'vector' to obtain a permutation matrix. [R,p,s] = chol(A,'upper','vector') is the same as [R,p,s] = chol(A,'vector').

Note Using chol is preferable to using eig for determining positive definiteness.

Examples

Example 1

The gallery function provides several symmetric, positive, definite matrices.

```
A=gallery('moler',5)
```

```
A =

     1    -1    -1    -1    -1
    -1     2     0     0     0
    -1     0     3     1     1
    -1     0     1     4     2
    -1     0     1     2     5

C=chol(A)

ans =

     1    -1    -1    -1    -1
     0     1    -1    -1    -1
     0     0     1    -1    -1
     0     0     0     1    -1
     0     0     0     0     1
isequal(C'*C,A)

ans =

     1
```

For sparse input matrices, `chol` returns the Cholesky factor.

```
N = 100;
A = gallery('poisson', N);
```

`N` represents the number of grid points in one direction of a square `N`-by-`N` grid. Therefore, `A` is N^2 by N^2.

```
L = chol(A, 'lower');
D = norm(A - L*L', 'fro');
```

The value of `D` will vary somewhat among different versions of MATLAB but will be on order of 10^{-14}.

Example 2

The binomial coefficients arranged in a symmetric array create a positive definite matrix.

```
n = 5;
```

```
X = pascal(n)
X =
    1     1     1     1     1
    1     2     3     4     5
    1     3     6    10    15
    1     4    10    20    35
    1     5    15    35    70
```

This matrix is interesting because its Cholesky factor consists of the same coefficients, arranged in an upper triangular matrix.

```
R = chol(X)
R =
    1     1     1     1     1
    0     1     2     3     4
    0     0     1     3     6
    0     0     0     1     4
    0     0     0     0     1
```

Destroy the positive definiteness (and actually make the matrix singular) by subtracting 1 from the last element.

```
X(n,n) = X(n,n)-1

X =
    1     1     1     1     1
    1     2     3     4     5
    1     3     6    10    15
    1     4    10    20    35
    1     5    15    35    69
```

Now an attempt to find the Cholesky factorization of `X` fails.

```
chol(X)
Error using chol
Matrix must be positive definite.
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`ichol` | `cholupdate`

Introduced before R2006a

cholupdate

Rank 1 update to Cholesky factorization

Syntax

```
R1 = cholupdate(R,x)
R1 = cholupdate(R,x,'+')
R1 = cholupdate(R,x,'-')
[R1,p] = cholupdate(R,x,'-')
```

Description

`R1 = cholupdate(R,x)` where `R = chol(A)` is the original Cholesky factorization of `A`, returns the upper triangular Cholesky factor of `A + x*x'`, where `x` is a column vector of appropriate length. `cholupdate` uses only the diagonal and upper triangle of `R`. The lower triangle of `R` is ignored.

`R1 = cholupdate(R,x,'+')` is the same as `R1 = cholupdate(R,x)`.

`R1 = cholupdate(R,x,'-')` returns the Cholesky factor of `A - x*x'`. An error message reports when R is not a valid Cholesky factor or when the downdated matrix is not positive definite and so does not have a Cholesky factorization.

`[R1,p] = cholupdate(R,x,'-')` will not return an error message. If `p` is `0`, `R1` is the Cholesky factor of `A - x*x'`. If `p` is greater than `0`, `R1` is the Cholesky factor of the original `A`. If `p` is `1`, `cholupdate` failed because the downdated matrix is not positive definite. If `p` is `2`, `cholupdate` failed because the upper triangle of `R` was not a valid Cholesky factor.

Examples

```
A = pascal(4)
A =
```

```
     1     1     1     1
     1     2     3     4
     1     3     6    10
     1     4    10    20

R = chol(A)
R =

     1     1     1     1
     0     1     2     3
     0     0     1     3
     0     0     0     1
x = [0 0 0 1]';
```

This is called a rank one update to A since `rank(x*x')` is 1:

```
A + x*x'
ans =


     1     1     1     1
     1     2     3     4
     1     3     6    10
     1     4    10    21
```

Instead of computing the Cholesky factor with `R1 = chol(A + x*x')`, we can use `cholupdate`:

```
R1 = cholupdate(R,x)
R1 =

    1.0000    1.0000    1.0000    1.0000
         0    1.0000    2.0000    3.0000
         0         0    1.0000    3.0000
         0         0         0    1.4142
```

Next destroy the positive definiteness (and actually make the matrix singular) by subtracting 1 from the last element of A. The downdated matrix is:

```
A - x*x'
ans =

     1     1     1     1
     1     2     3     4
     1     3     6    10
```

```
     1     4    10    19
```

Compare `chol` with `cholupdate`:

```
R1 = chol(A-x*x')
Error using chol
Matrix must be positive definite.
R1 = cholupdate(R,x,'-')
Error using cholupdate
Downdated matrix must be positive definite.
```

However, subtracting `0.5` from the last element of `A` produces a positive definite matrix, and we can use `cholupdate` to compute its Cholesky factor:

```
x = [0 0 0 1/sqrt(2)]';
R1 = cholupdate(R,x,'-')
R1 =
    1.0000    1.0000    1.0000    1.0000
         0    1.0000    2.0000    3.0000
         0         0    1.0000    3.0000
         0         0         0    0.7071
```

Tips

`cholupdate` works only for full matrices.

Algorithms

`cholupdate` uses the algorithms from the LINPACK subroutines `ZCHUD` and `ZCHDD`. `cholupdate` is useful since computing the new Cholesky factor from scratch is an $O(N^3)$ algorithm, while simply updating the existing factor in this way is an $O(N^2)$ algorithm.

References

[1] Dongarra, J.J., J.R. Bunch, C.B. Moler, and G.W. Stewart, *LINPACK Users' Guide*, SIAM, Philadelphia, 1979.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`chol` | `qrupdate`

Introduced before R2006a

circshift

Shift array circularly

Syntax

```
Y = circshift(A,K)
Y = circshift(A,K,dim)
```

Description

`Y = circshift(A,K)` circularly shifts the elements in array `A` by `K` positions. If `K` is an integer, then `circshift` shifts along the first dimension of `A` whose size does not equal 1. If `K` is a vector of integers, then each element of `K` indicates the shift amount in the corresponding dimension of `A`.

Note: The default behavior of `circshift(A,K)` where `K` is a scalar changed in R2016b. To preserve the behavior of R2016a and previous releases, use `circshift(A,K,1)`. This syntax specifies 1 as the dimension to operate along.

`Y = circshift(A,K,dim)` circularly shifts the values in array `A` by `K` positions along dimension `dim`. Inputs `K` and `dim` must be scalars.

Examples

Shift Column Vector Elements

Create a numeric column vector.

```
A = (1:10)'
```

```
A =

     1
     2
```

```
     3
     4
     5
     6
     7
     8
     9
    10
```

Use `circshift` to shift the elements by three positions.

```
Y = circshift(A,3)
```

```
Y =

     8
     9
    10
     1
     2
     3
     4
     5
     6
     7
```

The result, `Y`, has the same elements as `A` but they are in a different order.

Shift Characters in Array

Create an array of characters and use `circshift` to shift the characters by 3 positions. The characters are in a different order in `Y`.

```
A = 'racecar';
Y = circshift(A,3)
```

```
Y =
'carrace'
```

Shift Matrix Elements

Create a numeric array with a cluster of ones in the top left.

```
A = [1 1 0 0; 1 1 0 0; 0 0 0 0; 0 0 0 0]
```

```
A =

     1     1     0     0
     1     1     0     0
     0     0     0     0
     0     0     0     0
```

Use `circshift` to shift each row of A one position to the right.

```
Y = circshift(A,1,2)
```

```
Y =

     0     1     1     0
     0     1     1     0
     0     0     0     0
     0     0     0     0
```

Shift the elements of A by one position in each dimension. The cluster of ones is now in the center of the matrix.

```
Y = circshift(A,[1 1])
```

```
Y =

     0     0     0     0
     0     1     1     0
     0     1     1     0
     0     0     0     0
```

To move the cluster back to its original position, use `circshift` on Y with negative shift values. The matrix X is equivalent to A.

```
X = circshift(Y,[-1 -1])
```

```
X =

     1     1     0     0
     1     1     0     0
```

```
     0     0     0     0
     0     0     0     0
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `table` | `cell`
Complex Number Support: Yes

K — Shift amount

integer scalar | vector of integers

Shift amount, specified as an integer scalar or vector of integers.

- If you specify K as an integer and do not specify `dim`, then `circshift` shifts along the first dimension whose size does not equal 1. Positive K shifts toward the end of the dimension and negative K shifts toward the beginning.
- If you specify K as a vector of integers, then the *N*th element in K specifies the shift amount for the *N*th dimension in A. If the *N*th element in K is positive, then the values of A shift toward the end of the *N*th dimension. If the *N*th element is negative, then the values shift toward the beginning.

If the shift amount is greater than the length of the corresponding dimension in A, then the shift circularly wraps to the beginning of that dimension. For example, shifting a 3-element vector by +3 positions brings its elements back to their original positions.

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, the default is the first dimension whose size does not equal 1. If you specify `dim`, then K must be an integer scalar. In general, specify `dim = 1` to exchange rows, `dim = 2` to exchange columns, and so on.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`fftshift` | `permute` | `reshape` | `shiftdim`

Introduced before R2006a

circumcenters

Class: TriRep

(Not recommended) Circumcenters of specified simplices

Note: `circumcenters(TriRep)` is not recommended. Use circumcenter(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
CC = circumcenters(TR, SI)
[CC RCC] = circumcenters(TR, SI)
```

Description

`CC = circumcenters(TR, SI)` returns the coordinates of the circumcenter of each specified simplex `SI`. `CC` is an `m`-by-`n` matrix, where `m` is of length `length(SI)`, the number of specified simplices, and `n` is the dimension of the space where the triangulation resides.

`[CC RCC] = circumcenters(TR, SI)` returns the circumcenters and the corresponding radii of the circumscribed circles or spheres.

Input Arguments

`TR`	Triangulation object.
`SI`	Column vector of simplex indices that index into the triangulation matrix `TR.Triangulation`. If `SI` is not specified the circumcenter information

for the entire triangulation is returned, where the circumcenter associated with simplex `i` is the `i`'th row of `CC`.

Output Arguments

`CC`	`m`-by-`n` matrix. `m` is the number of specified simplices and `n` is the dimension of the space where the triangulation resides. Each row `CC(i,:)` represents the coordinates of the circumcenter of simplex `SI(i)`.
`RCC`	Vector of length `length(SI)`, the number of specified simplices containing radii of the circumscribed circles or spheres.

Examples

Example 1

Load a 2-D triangulation.

```
load trimesh2d
trep = TriRep(tri, x,y)
```

Compute the circumcenters.

```
cc = circumcenters(trep);
triplot(trep);
axis([-50 350 -50 350]);
axis equal;
hold on;
plot(cc(:,1),cc(:,2),'*r');
hold off;
```

The circumcenters represent points on the medial axis of the polygon.

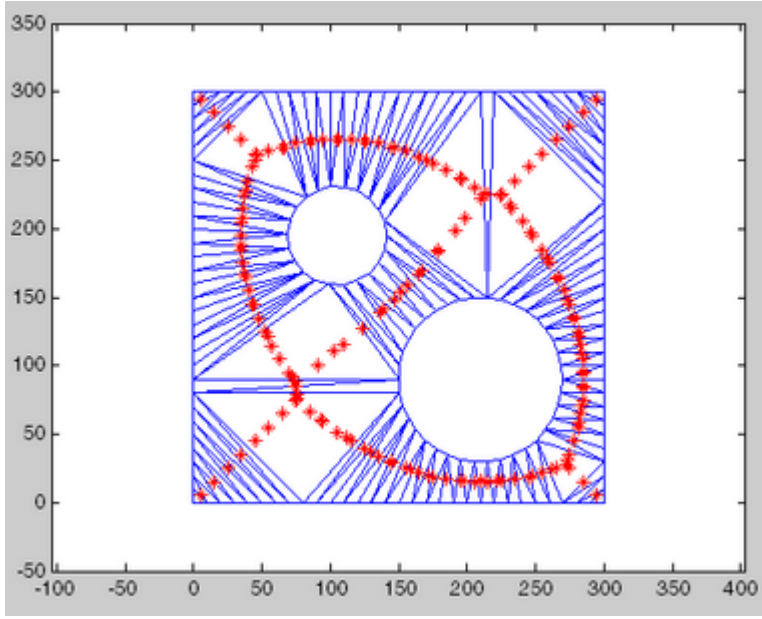

Example 2

Query a 3-D triangulation created with `DelaunayTri`. Compute the circumcenters of the first five tetrahedra.

```
X = rand(10,3);
dt = DelaunayTri(X);
cc = circumcenters(dt, [1:5]')
```

Definitions

Simplex

A simplex is a triangle/tetrahedron or higher-dimensional equivalent.

See Also

delaunayTriangulation | incenter | triangulation

cla

Clear axes

Syntax

```
cla
cla(ax)
```

```
cla reset
cla(ax,'reset')
```

Description

`cla` deletes all graphics objects that have visible handles from the current axes. The handle is visible if the `HandleVisibility` property of the object is set to `'on'`. The next plot added to the axes uses the first color and line style based on the `ColorOrder` and `LineStyleOrder` properties of the axes. If axes do not exist, then this command creates one.

`cla(ax)` deletes graphics objects from the axes or polar axes specified by `ax` instead of the current axes.

`cla reset` deletes graphics objects from the current axes regardless of their handle visibility. It also resets axes properties to their default values, except for the `Position` and `Units` properties.

`cla(ax,'reset')` resets properties for the specified axes.

Examples

Clear Current Axes

Plot two sine waves. Then, clear the line plots from the axes.

```
x = linspace(0,2*pi);
```

```
y1 = sin(x);
plot(x,y1)

hold on
y2 = sin(2*x);
plot(x,y2)
```

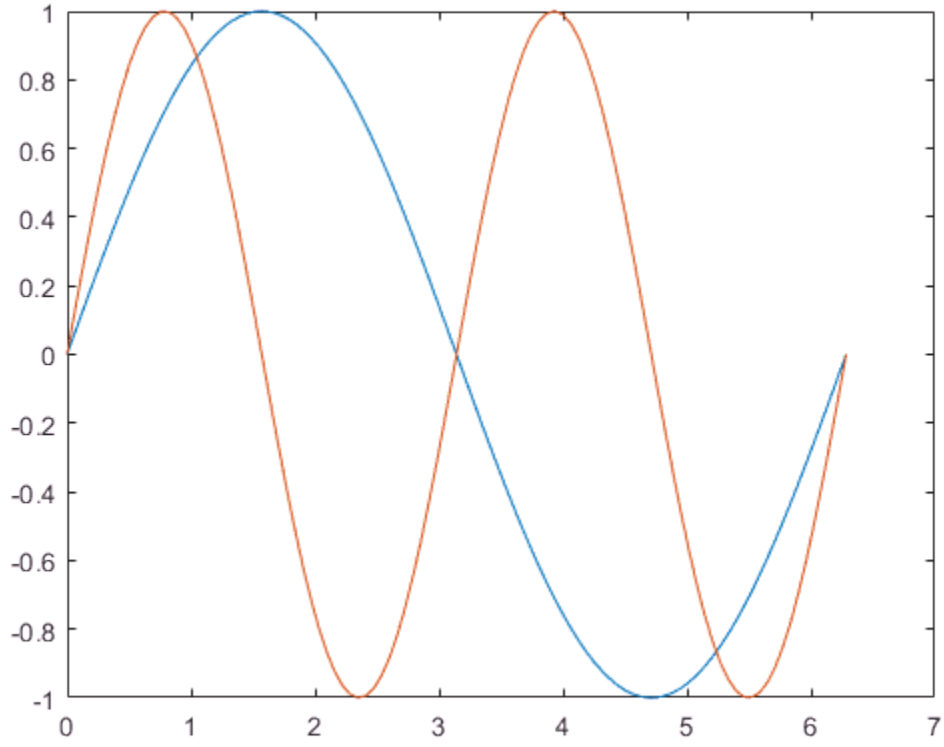


```
cla
```

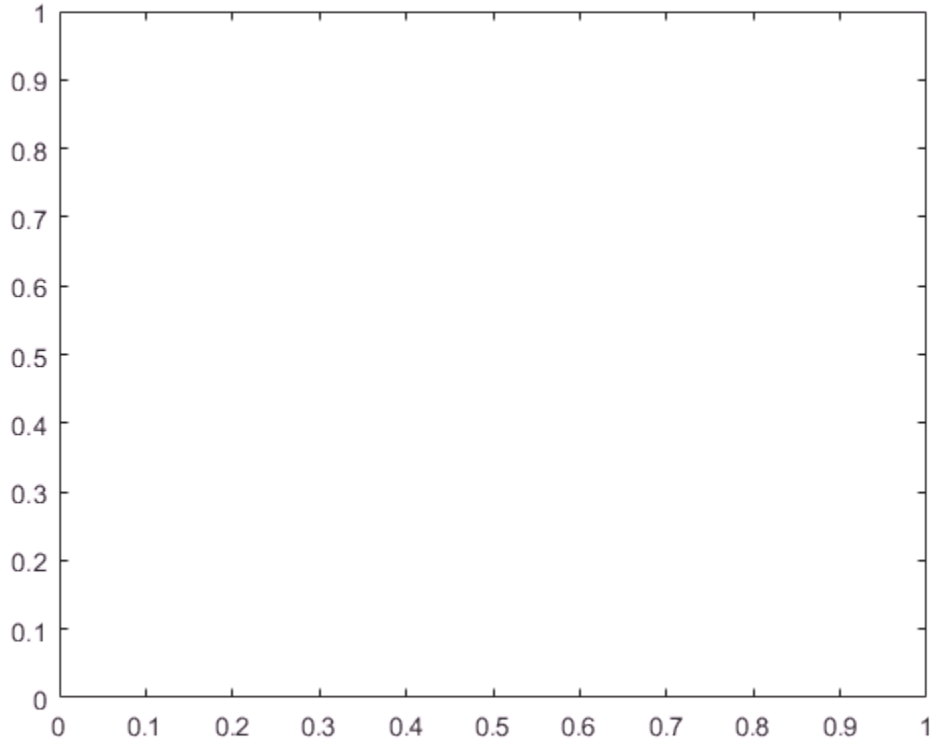

`cla` clears the line plots and resets the `ColorIndex` and `LineStyleIndex` properties of the axes to 1. Subsequent plots start from the beginning of the color order and line style order. For example, plot another sine wave.

```
y3 = sin(3*x);
plot(x,y3)
hold off
```

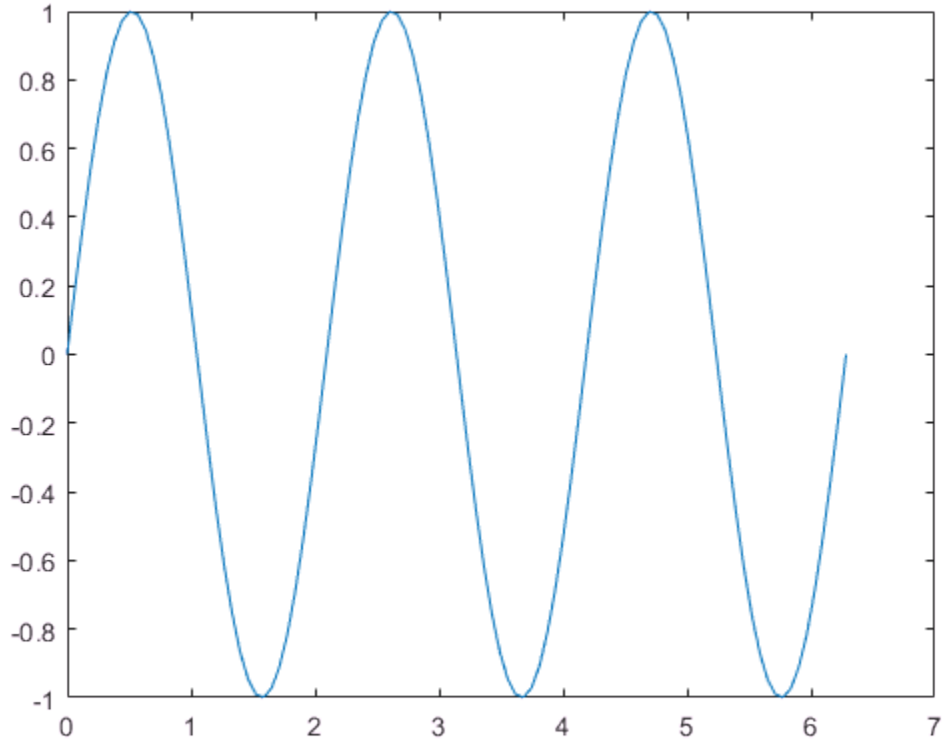

Clear Specific Axes

Create a figure with two subplots and assign the `Axes` objects to the variables `ax1` and `ax2`. Add plots to both axes.

```
ax1 = subplot(2,1,1);
surf(ax1,peaks)

ax2 = subplot(2,1,2);
contour(ax2,peaks)
```

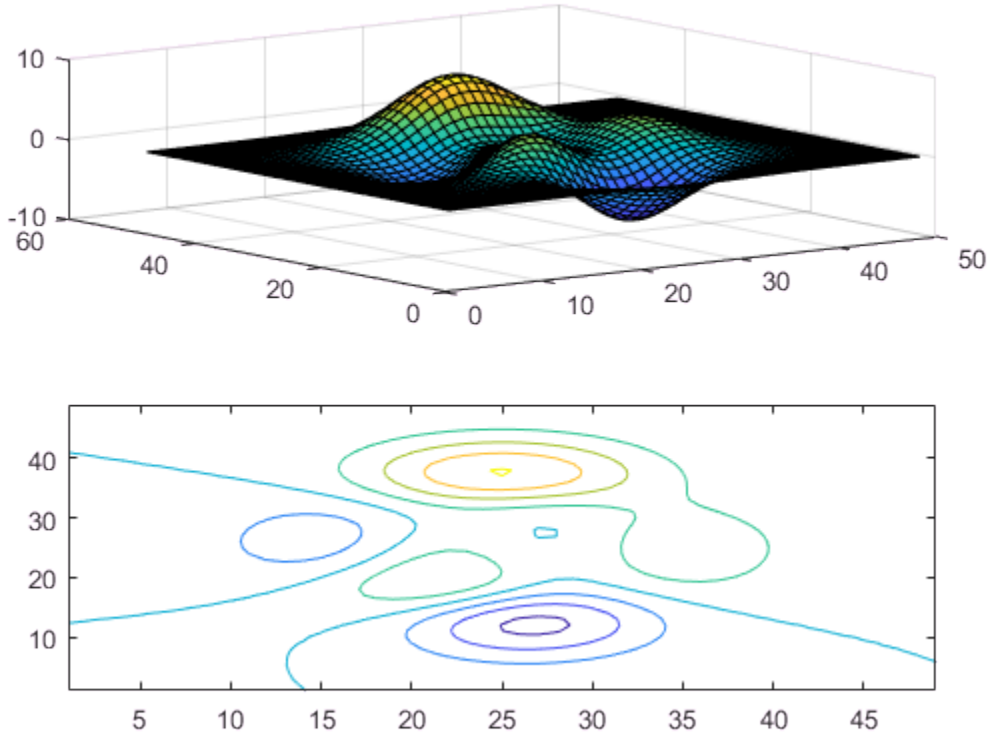

Clear the surface plot from the upper subplot by specifying `ax1` as an input argument to `cla`.

```
cla(ax1)
```

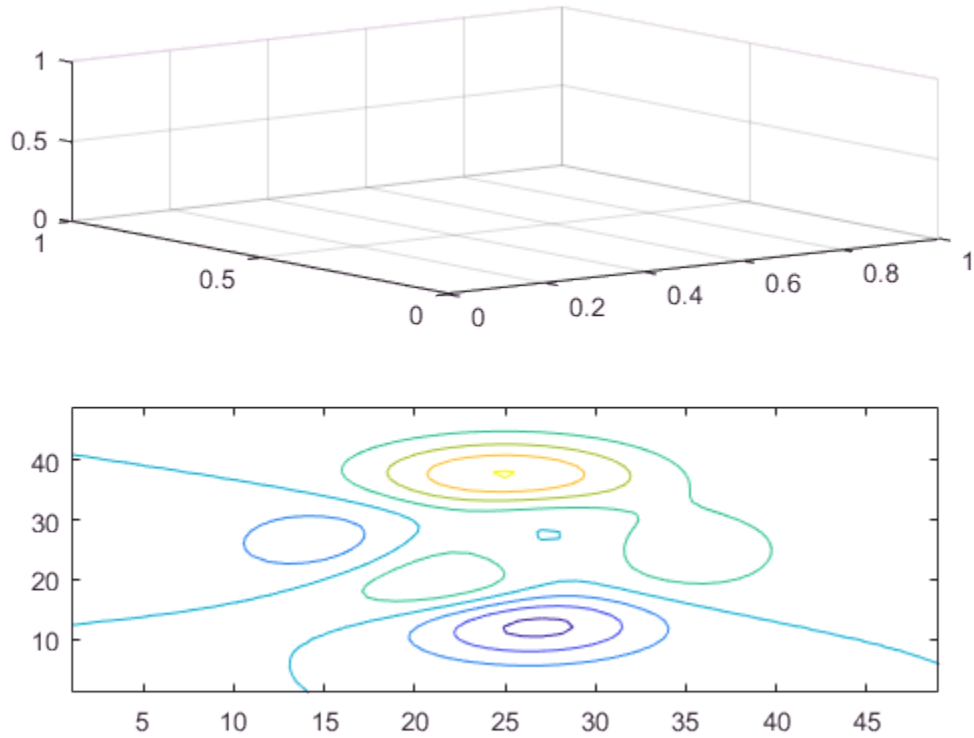

Now, reset all axes properties for the upper subplot, including the camera properties that control the view, by using the optional input argument `'reset'`.

```
cla(ax1,'reset')
```

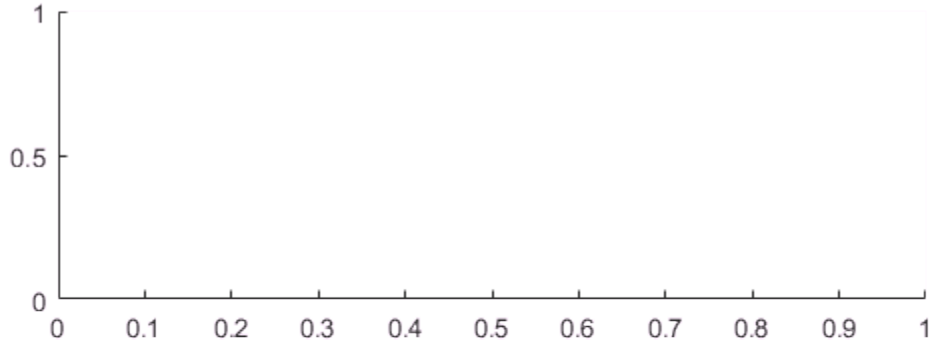

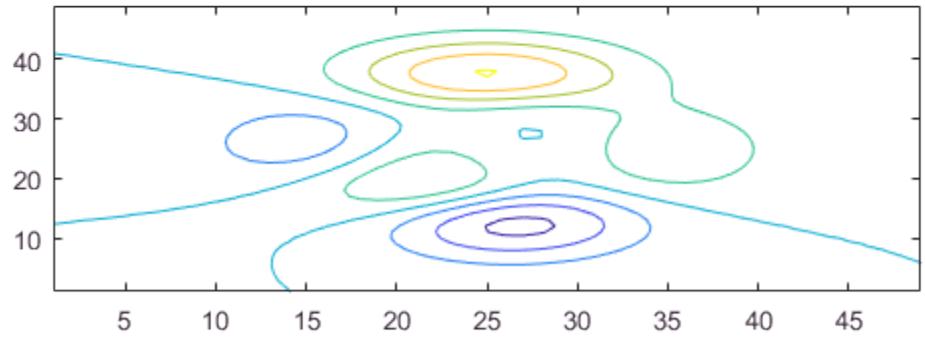

Clear Axes and Reset All Axes Properties

Create a line plot and set the axis limits.

```
x = linspace(0,2*pi);
y = sin(x);
plot(x,y)
axis([0 5 -2 2])
```

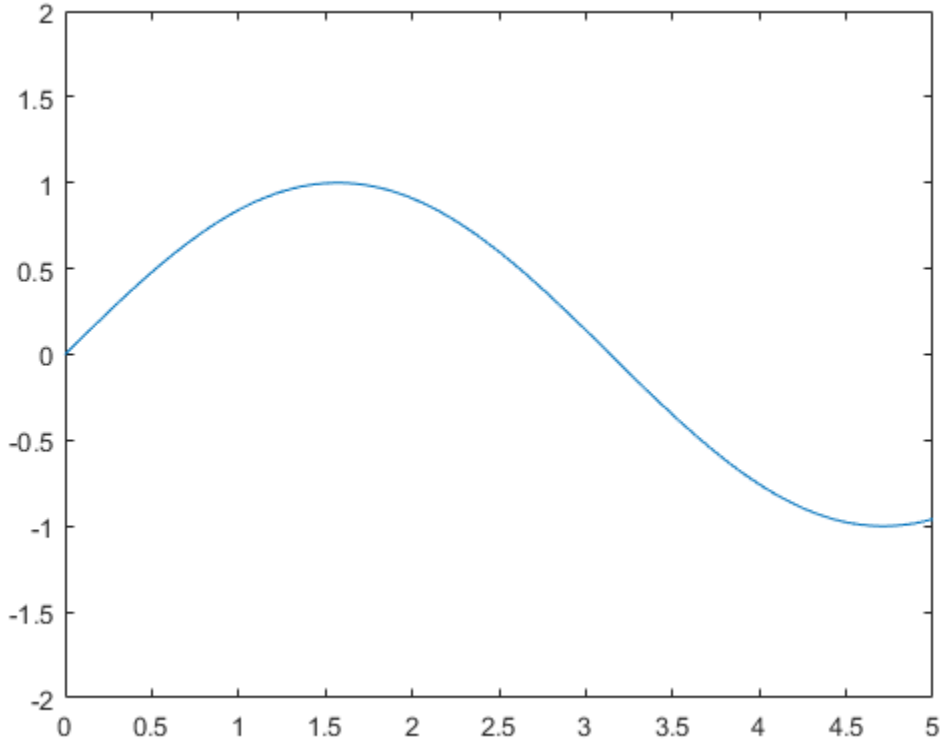

Clear the line plot from the axes and reset all the axes properties to their default values. `cla reset` resets all properties of the current axes, except for the `Position` and `Units` properties.

```
cla reset
```

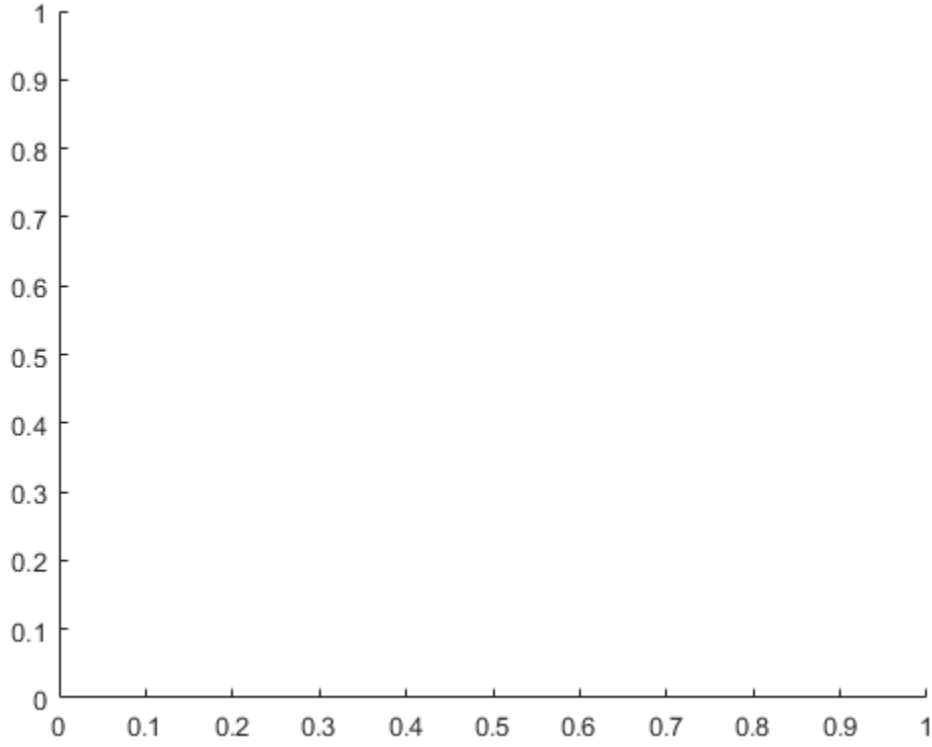

Input Arguments

ax — Target axes
`Axes` object | `PolarAxes` object

Target axes, specified as an `Axes`object or a `PolarAxes` object. Use `ax` to clear specific axes, instead of the current axes.

Tips

- The `cla` command resets the `ColorOrderIndex` and `LineStyleOrderIndex` properties of the current axes to `1`.
- `cla` only deletes objects with a `HandleVisibility` property set to `'on'`. Therefore, if the `HandleVisibility` of an object is set to `'callback'` and you are in a callback, then `cla` does not delete it.

See Also

See Also

Functions

`clf` | `hold` | `newplot` | `reset`

Properties

Axes Properties

Introduced before R2006a

clabel

Label contour plot elevation

Syntax

```
clabel(C,h)
clabel(C,h,v)
clabel(C,h,'manual')
t = clabel(C,h,'manual')
```

```
clabel(C)
clabel(C,v)
clabel(C,'manual')
tl = clabel( ___ )
```

```
clabel( ___ ,Name,Value)
```

Description

`clabel(C,h)` labels the current contour plot with rotated text inserted into each contour line. The contour lines must be long enough to fit the label, otherwise `clabel` does not insert a label. If you do not have the contour matrix `C`, then replace `C` with `[]`.

`clabel(C,h,v)` labels the contour levels specified by vector `v`.

`clabel(C,h,'manual')` labels the locations you select with the mouse. Click the mouse or press the space bar to label the contour closest to the center of the crosshair. Press the **Return** key while the cursor is within the figure window to terminate labeling.

`t = clabel(C,h,'manual')` returns the text objects created.

`clabel(C)` labels contours with `'+'` symbols and upright text.

`clabel(C,v)` adds upright labels to the contour levels specified by the vector, `v`.

`clabel(C,'manual')` adds upright labels at the locations you select with the mouse. Click the mouse or press the space bar to label the contour closest to the center of

the crosshair. Press the **Return** key while the cursor is within the figure window to terminate labeling.

`tl = clabel( ___ )` returns the text and line objects created. Use any of the input argument combinations in the previous syntaxes that do not include the contour object `h`.

`clabel( ___ ,Name,Value)` modifies the label appearance using one or more `Name,Value` pair arguments. Use any of the input argument combinations in the previous syntaxes. For example, `'FontSize',14` sets the font size to 14 points.

Examples

Label Contour Plot Levels

Create a contour plot and obtain the contour matrix, `C`, and the contour object, `h`. Then, label the contour plot.

```
[x,y,z] = peaks;
[C,h] = contour(x,y,z);
clabel(C,h)
```

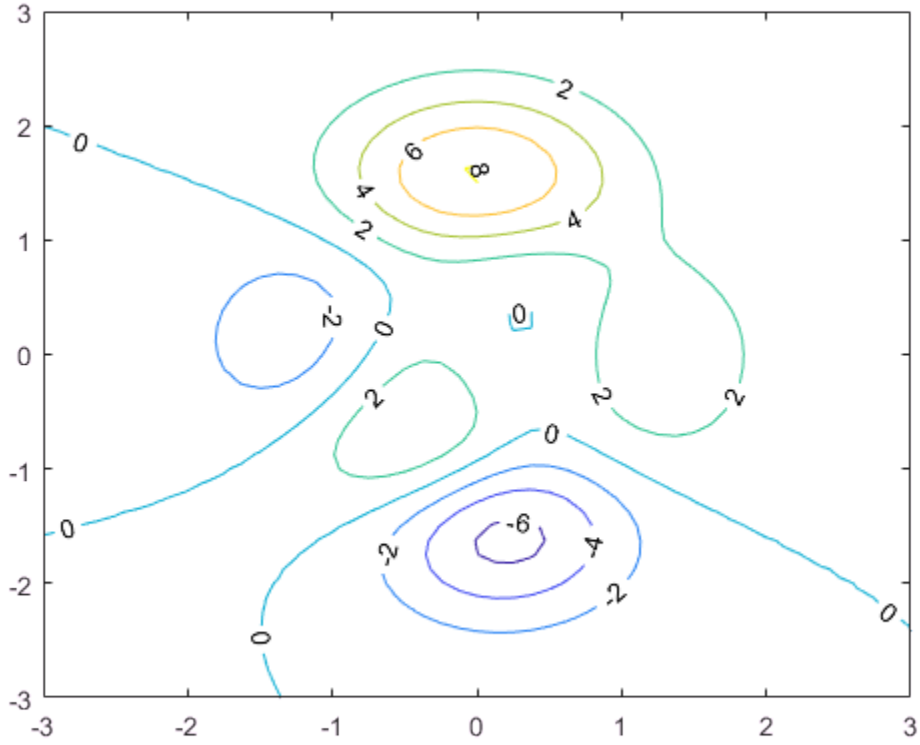

Label Specific Contour Levels

Label only the contours with contour levels 2 or 6.

```
[x,y,z] = peaks;
[C,h] = contour(x,y,z);
v = [2,6];
clabel(C,h,v)
```

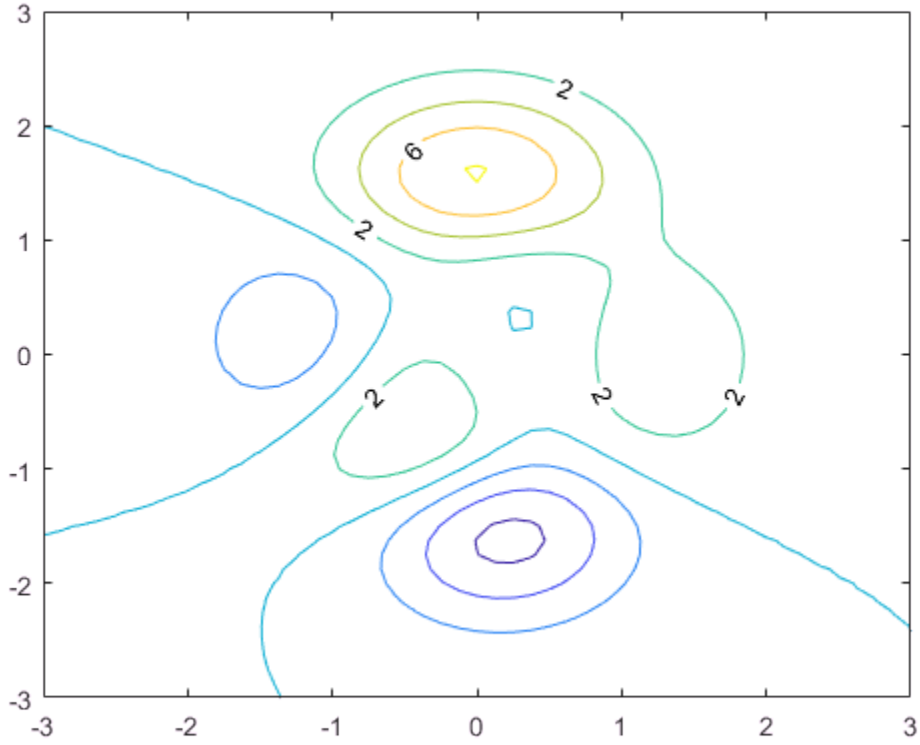

Set Contour Label Properties

Set the font size of the labels to 15 points and set the color to red using `Name,Value` pair arguments.

```
[x,y,z] = peaks;
[C,h] = contour(x,y,z);
clabel(C,h,'FontSize',15,'Color','red')
```

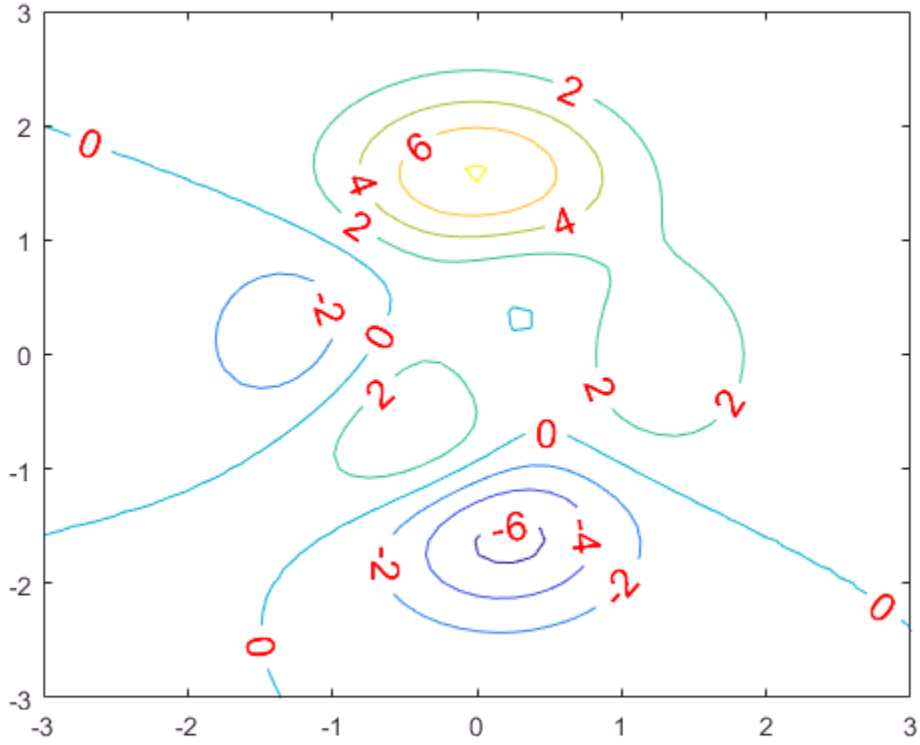

Set additional properties by reissuing the `clabel` command. For example, set the font weight to bold and change the color to blue.

```
clabel(C,h,'FontWeight','bold','Color','blue')
```

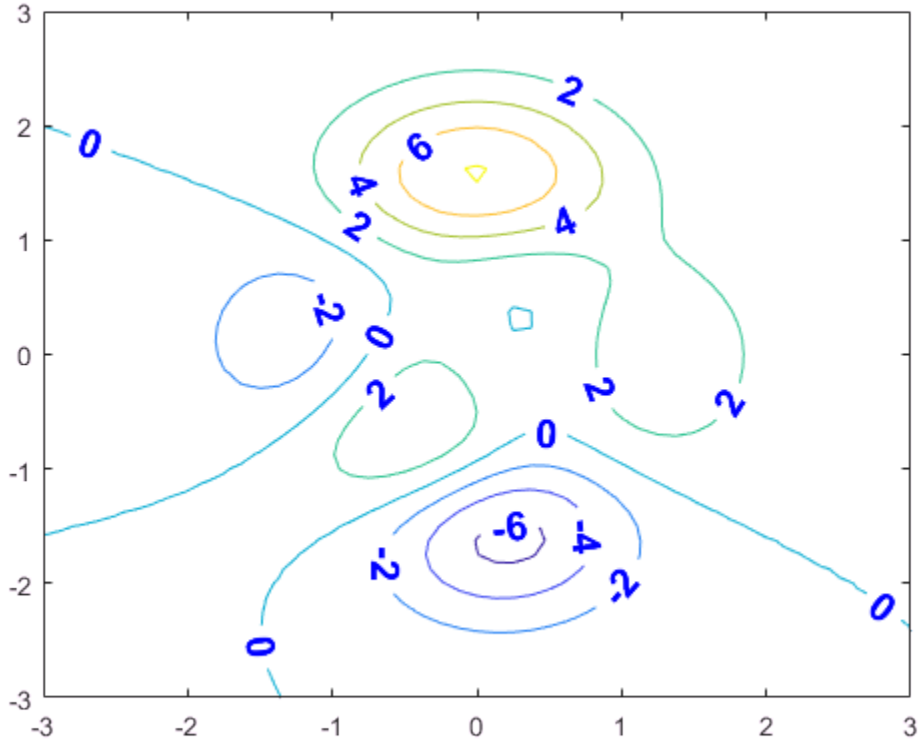

Set the font size back to the default size using the `'default'` keyword.

```
clabel(C,h,'FontSize','default')
```

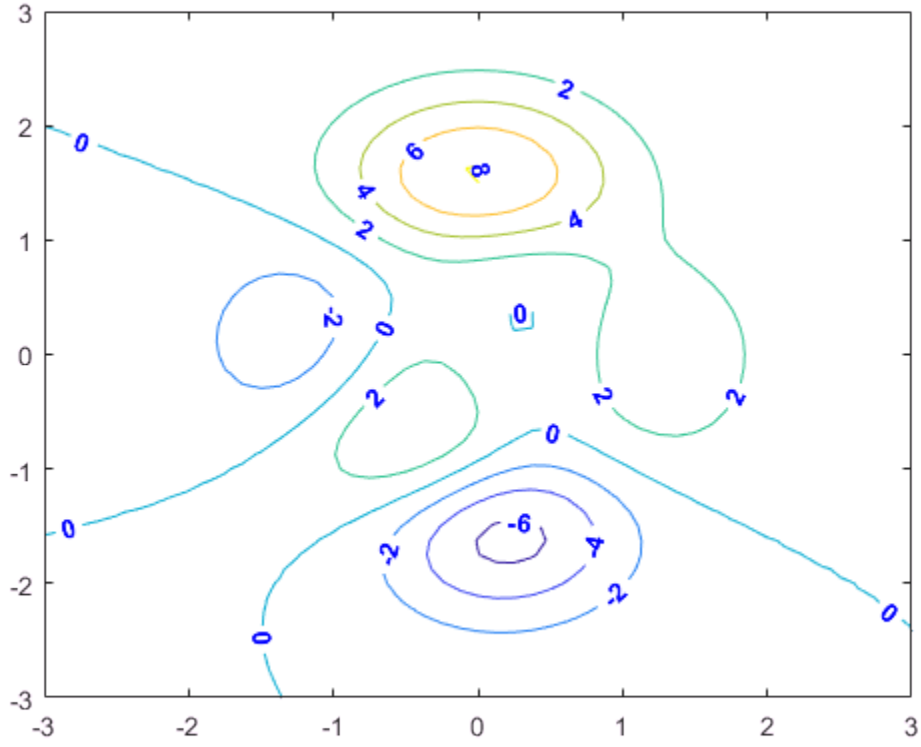

Label Contour Plot with Vertical Text

Create a contour plot and return the contour matrix, `C`. Then, label the contours.

```
[x,y,z] = peaks;
C = contour(x,y,z);
clabel(C)
```

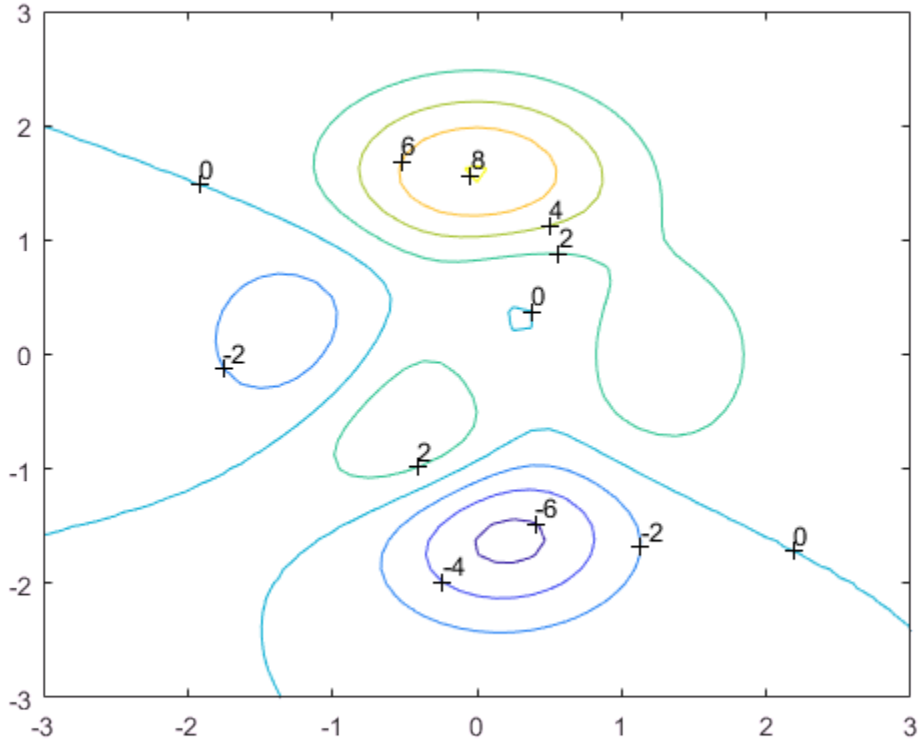

Input Arguments

C — Contour matrix

two-row matrix

Contour matrix returned by the `contour`, `contour3`, or `contourf` function. `C` contains the data that defines the contour lines. For more information on the contour matrix, see ContourMatrix.

Note: If you pass the contour object `h` to the `clabel` function, then you can replace `C` with `[]`. For example, use `clabel([],h)`.

`h` — Contour object
contour object

Contour object returned by the `contour`, `contour3`, or `contourf` function.

`v` — Contour level values
vector

Contour level values, specified as a row or column vector of individual values.

Example: `[0 10 20]`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`clabel` supports the `LabelSpacing` property plus a subset of text properties.

Example: `clabel(C,h,'Color','red','FontSize',12)` specifies red, 12-point labels.

`'LabelSpacing'` — Space between labels
scalar

Space between labels, specified as a scalar value in point units.

Note: Use this option with either the `clabel(C,h)` or `clabel(C,h,v)` syntax. Other syntaxes do not support this option.

Example: `clabel(C,h,'LabelSpacing',100)`

`'Color'` — Text color
`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. The default color is black with an RGB triplet value of `[0 0 0]`. If you set the color to `'none'`, then the text is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'EdgeColor'` — Color of text box outline

`'none'` (default) | RGB triplet | character vector of color name

Color of text box outline, specified as `'none'`, a three-element RGB triplet, or a character vector of a color name. The default edge color of `'none'` makes the box outline invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `clabel(C,h,'EdgeColor','k')`

`'BackgroundColor'` — Color of text box background

`'none'` (default) | RGB triplet | character vector of color name

Color of text box background, specified as `'none'`, a three-element RGB triplet, or a character vector of a color name. The default background color of `'none'` makes the text box background transparent.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `clabel(C,h,'BackgroundColor','g')`

`'FontSize'` — Font size

`10` (default) | scalar value greater than 0

Font size, specified as a scalar value greater than 0. By default, the font size uses point units. One point equals 1/72 inch. However, some syntaxes allow you to change the font units using the `FontUnits` property.

Example: `clabel(C,h,'FontSize',15)`

`'FontName'` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`'FontAngle'` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font might look the same as the normal font.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

`'FontWeight'` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

`'FontSmoothing'` — Smooth font character appearance

`'on'` (default) | `'off'`

Smooth font character appearance, specified as one of these values:

- `'on'` — Apply font smoothing. Reduce the appearance of jaggedness in the text characters to make the text easier to read.
- `'off'` — Do not apply font smoothing.

Example: `clabel(C,h,'FontSmoothing','on')`

`'FontUnits'` — Font size units

`'points'` (default) | `'inches'` | `'centimeters'` | `'characters'` | `'normalized'` | `'pixels'`

Font size units, specified as one of the values in this table.

Units	Description
`'points'`	Points. One point equals 1/72 inch.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'normalized'`	Interpret font size as a fraction of the axes height. If you resize the axes, the font size modifies accordingly. For example, if the `FontSize` is `0.1` in normalized units, then the text is 1/10 of the axes height.
`'pixels'`	Pixels.

Units	Description
	Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

If you set both the font size and the font units in one function call, you must set the `FontUnits` property first so that the axes correctly interprets the specified font size.

Note: The `clabel(C,h)` and `clabel(C,h,v)` syntaxes do not support this option. They always use the default value of points.

Example: `clabel(C,'FontUnits','normalized')`

`'Rotation'` — Text orientation
`0` (default) | scalar

Text orientation, specified as a scalar value in degrees. The default rotation of 0 degrees makes the text horizontal. For vertical text, set this property to `90` or `-90`. Positive values rotate the text counterclockwise. Negative values rotate the text clockwise.

Note: The `clabel(C,h)` and `clabel(C,h,v)` syntaxes do not support this option. Instead, they insert rotated text into the contour lines, with each label rotated to match the local orientation of the corresponding line.

Example: `clabel(C,'Rotation',90)`

`'Interpreter'` — Interpretation of text characters
`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Display text using TeX markup.
- `'latex'` — Display text using LaTeX markup.
- `'none'` — Display literal characters.

Since the labels are numeric text, the effect of this property is limited to subtle changes in the font style and weight.

Example: `clabel(C,h,'Interpreter','latex')`

`'LineStyle'` — Line style of text box outline

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style of text box outline, specified as one of the line styles in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

Example: `clabel(C,h,'LineStyle','--')`

`'LineWidth'` — Width of text box outline

`0.5` (default) | scalar

Width of text box outline, specified as a scalar value in point units. One point equals 1/72 inch.

Example: `clabel(C,h,'LineWidth',1)`

`'Margin'` — Space around text within the text box

`3` (default) | scalar

The space around the text within the text box, specified as scalar value in point units.

MATLAB uses the `Extent` property value plus the `Margin` property value to determine the size of the text box.

Example: `clabel(C,h,'Margin',4)`

Output Arguments

`t` — Text objects
vector

Text objects, returned as a vector. The `String` properties of the text objects contain the contour values displayed.

`tl` — Text and line objects
vector

Text and line objects, returned as a vector. The `String` properties of the text objects contain the contour values displayed. The line objects correspond to the `'+'` symbols.

See Also

See Also

Functions
`contour` | `contour3` | `contourc` | `contourf`

Properties
Text Properties

Introduced before R2006a

class

Determine class of object

Syntax

```
ClassName = class(object)
obj = class(s,'class_name')
obj = class(s,'class_name',parent1,parent2,...)
obj = class(struct([]),'class_name',parent1,parent2,...)
obj_struct = class(struct_array,'class_name',parent_array)
```

Description

`ClassName = class(object)` returns a string specifying the class of `object`. See "Fundamental MATLAB Classes" for more information on MATLAB classes.

Note: Before MATLAB 7.6 (classes defined without a `classdef` statement), class constructors called the `class` function to create the object. The following `class` function syntaxes apply only within classes defined before Version 7.6.

`obj = class(s,'class_name')` creates an array of class *`class_name`* objects using the `struct` `s` as a pattern to determine the size of `obj`.

`obj = class(s,'class_name',parent1,parent2,...)` inherits the methods and fields of the parent objects `parent1`, `parent2`, and so on. The size of the parent objects must match the size of `s` or be a scalar (1-by-1), in which case MATLAB performs scalar expansion.

`obj = class(struct([]),'class_name',parent1,parent2,...)` constructs an object containing only fields that it inherits from the parent objects. All parents must have the same, nonzero size, which determines the size of the returned object `obj`.

`obj_struct = class(struct_array,'class_name',parent_array)` maps every element of the `parent_array` to a corresponding element in the `struct_array` to produce the output array of objects, `obj_struct`.

All arrays must be of the same size. If either the `struct_array` or the `parent_array` is of size 1-by-1, then MATLAB performs scalar expansion to match the array sizes.

To create an object array of size 0-by-0, set the size of the `struct_array` and `parent_array` to 0-by-0.

Examples

Return the class of Java object `obj`:

```
import java.lang.*;
obj = String('mystring');
disp(class(obj))
java.lang.String
```

Return class of any MATLAB variable:

```
h = @sin;
disp(class(h))
function_handle
```

Tutorials

- "Class Components"

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`isa` | `isobject` | `metaclass`

Topics

"Class Components"

Introduced before R2006a

classdef

Class definition keywords

Syntax

```
classdef ClassName
   ...
end
```

Description

`classdef` *`ClassName`* begins the class definition and an `end` keyword terminates the `classdef` block. Only blank lines and comments can precede `classdef`. Enter a class definition in a file having the same name as the class, with a filename extension of `.m`.

Class definition files can be in folders on the MATLAB path or in class folders whose parent folder is on the MATLAB path. Class folder names begin with the `'@'` character followed by the class name (for example, `@MyClass`). For more information on class folders, see “Class Files and Folders” .

For more information on classes, see “Classdef Block” and “Class Definition”.

`properties` begins a property definition block, an `end` keyword terminates the `properties` block. Class definitions can contain multiple property definition blocks, each specifying different attribute settings that apply to the properties in that particular block.

For more information on properties, see “Property Syntax”.

Note: Properties cannot have the same name as the class.

`methods` begins a methods definition block, an `end` keyword terminates the `methods` block. This block contains functions that implement class methods. Class definitions can contain multiple method blocks, each specifying different attribute settings that apply to the methods in that particular block. It is possible to define method functions in separate files.

For more information on methods, see "Methods in Class Design".

`events` begins an events definition block, an `end` keyword terminates the `events` block. This block contains event names defined by the class. Class definitions can contain multiple event blocks, each specifying different attribute settings that apply to the events in that particular block.

For more information on events, see "Events and Listeners Syntax".

`enumeration` begins an enumeration definition block, an `end` keyword terminates the `enumeration` block.

For more information on enumerations, see "Enumerations".

`properties`, `methods`, `events`, and `enumeration` are also the names of MATLAB functions used to query the respective class members for a given object or class name.

Examples

Use these keywords to define classes.

```
classdef (Attributes) ClassName
   properties (Attributes)
      PropertyName
   end
   methods (Attributes)
      function obj = methodName(obj,arg2,...)
         ...
      end
   end
   events (Attributes)
      EventName
   end
   enumeration
      EnumName
   end
end
```

Tutorials

- "Class Components"

- "Attribute Specification"
- "Sample Class Implementations"
- "Methods in Separate Files"

See Also

`properties` | `methods` | `events`

Topics

"Class Components"
"Attribute Specification"
"Sample Class Implementations"
"Methods in Separate Files"

Introduced in R2008a

classUnderlying

Class of underlying data in tall array

Syntax

```
C = classUnderlying(X)
```

Description

`C = classUnderlying(X)` returns the class of the data stored inside tall array `X`.

Examples

Determine Underlying Class of Tall Arrays

All tall tables and arrays belong to the `tall` class. However, the *underlying* data type of a tall array can vary.

Create a datastore for the `airlinesmall.csv` data set. Select a subset of the variables to work with, and treat `'NA'` values as missing data so that `datastore` replaces them with `NaN` values. Convert the datastore into a tall table.

```
varnames = {'Year', 'UniqueCarrier'};
ds = datastore('airlinesmall.csv','TreatAsMissing','NA',...
    'SelectedVariableNames',varnames);
tt = tall(ds)
```

```
tt =

  M×2 tall table

    Year    UniqueCarrier
    ____    _____________

    1987    'PS'
    1987    'PS'
    1987    'PS'
```

```
    1987    'PS'
    1987    'PS'
    1987    'PS'
    1987    'PS'
    1987    'PS'
    :       :
    :       :
```

Determine the class of the tall table `tt` and the first table variable `Year`.

```
class(tt)
```

```
ans =
'tall'
```

```
class(tt.Year)
```

```
ans =
'tall'
```

Determine the underlying data types of `tt`, as well as the `Year` and `UniqueCarrier` table variables.

```
classUnderlying(tt)
```

```
ans =

  1×5 tall char array

    'table'
```

```
classUnderlying(tt.Year)
```

```
ans =

  1×6 tall char array

    'double'
```

```
classUnderlying(tt.UniqueCarrier)
```

```
ans =

  1×4 tall char array

    'cell'
```

In some cases, the result returned by `classUnderlying` is an unevaluated tall array. Unevaluated tall arrays can be evaluated using the `gather` function to bring the result into memory.

Input Arguments

`X` — Input array

tall array

Input array, specified as a tall array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `table` | `cell` | `categorical` | `datetime` | `duration` | `calendarDuration`

Output Arguments

`C` — Underlying class

tall array

Underlying class, returned as a tall array.

Tips

- Use `isaUnderlying` to test whether a tall array has a particular underlying data type.

See Also

See Also

`isaUnderlying` | `istall` | `tall`

Topics

"Tall Arrays"

"Functions That Support Tall Arrays (A–Z)"

Introduced in R2016b

clc

Clear Command Window

Syntax

```
clc
```

Description

`clc` clears all input and output from the Command Window display, giving you a "clean screen."

After using `clc`, you cannot use the scroll bar to see the history of functions, but you still can use the up arrow key, ↑, to recall statements from the command history.

Examples

Use `clc` in a MATLAB code file to always display output in the same starting position on the screen.

See Also

`clear` | `clf` | `close` | `home`

Introduced before R2006a

clear

Remove items from workspace, freeing up system memory

Syntax

```
clear
clear name1 ... nameN
clear -regexp expr1 ... exprN
clear ItemType
```

Description

`clear` removes all variables from the current workspace, releasing them from system memory.

`clear name1 ... nameN` removes the variables, scripts, functions, or MEX-functions `name1 ... nameN` from memory.

If `name` is

- A function, then `clear` reinitializes any persistent variables in the function
- A script or function that is currently executing, then `clear` does not remove it
- A function locked by `mlock`, then `clear` does not remove it
- A variable that is global, then `clear` removes it from the current workspace, but it remains in the global workspace

`clear -regexp expr1 ... exprN` removes all variables that match any of the regular expressions listed. This option only removes variables.

`clear ItemType` removes the types of items indicated by `ItemType`, such as `all`, `functions`, or `classes`.

Examples

Clear a Single Variable

Define two variables `a` and `b`, and then clear `a`.

```
a = 1;
b = 2;
clear a
```

Only variable `b` remains in the workspace.

```
whos
```

```
  Name      Size            Bytes  Class     Attributes

  b         1x1                 8  double
```

Clear Specific Variables by Name

Using regular expressions, clear those variables with names that begin with `Mon`, `Tue`, or `Wed`.

```
clear -regexp ^Mon ^Tue ^Wed;
```

Clear Set of Variables

Create a cell array, `vars`, that contains the names of variables to clear. Then, clear those variables.

```
vars = {'v1','v2','time'};
clear(vars{:})
```

Clear All Compiled Scripts, Functions, and MEX-functions

If a function is locked or currently running, it is not cleared from memory.

```
clear functions
```

Input Arguments

`name1 ... nameN` — Names of variables, scripts, functions, or MEX-functions to clear
character vectors

Names of variables, scripts, functions, or MEX-functions to clear, specified as one or more character vectors.

Use a partial path to distinguish between different overloaded versions of a function. For example, `clear polynom/display` clears only the `display` method for `polynom` objects, leaving any other implementations in memory.

`expr1 ... exprN` — Regular expressions matching names of variables to clear

character vectors

Regular expressions matching names of variables to clear, specified as one or more character vectors.

`ItemType` — Type of items to clear

`all` | `classes` | `functions` | `global` | `import` | `java` | `mex` | `variables`

Type of items to clear, specified as one of the following.

Value of `ItemTyp`	Items Cleared								Notes
	Variab in scope	Scripts and functio	Class definiti	Persis varia	MEX functio	Globa varia	Impor list	Java classes on the dynamic path	
`all`	✓	✓		✓	✓	✓	From comm prom only		Calling `clear all` decreases code performance, and is usually unnecessary. For more information, see the "Tips" on page 1-1448 section.
`classes`	✓	✓	✓	✓	✓	✓	✓		Calling `clear classes` decreases code performance, and is usually unnecessary. For more information, see the "Tips" on page 1-1448 section. To instantiate an object with an updated class definition, it is not necessary to call `clear`

Value of `ItemTyp`	Items Cleared								Notes
	Variab in scope	Scripts and functio	Class definiti	Persis varia	MEX functio	Globa varia	Impor list	Java classes on the dynamic path	
									`classes`. When you modify a class definition, MATLAB updates it automatically. For more information, see "Automatic Updates for Modified Classes". `clear classes` issues a warning and does not clear a class of objects if any of those objects still exists after the workspace is cleared. For example, objects can still exist in persistent variables of functions or figure windows. `clear classes` does not clear a class if its file is locked using the `mlock` command. No warning is issued in this case.
`functio`		✓		✓	✓				Calling `clear functions` decreases code performance, and is usually unnecessary. For more information, see the "Tips" on page 1-1448 section.

Value of `ItemTyp`	Items Cleared								Notes
	Variab in scope	Scripts and functio	Class definiti	Persis varia	MEX functio	Globa varia	Impor list	Java classes on the dynamic path	
`global`						✓			`clear global` removes all global variables in the current and global workspaces. For example, when called from a function, `clear global` removes all global variables in the function and global workspaces, but not in the base workspace.
`import`							✓		Call `clear import` only from the command prompt. Calling `clear import` in a function or a script returns an error.
`java`	✓	✓		✓	✓	✓		✓	`clear java` issues a warning and does not remove the Java class definition if any of its Java objects exist outside the workspace (for example, in user data or persistent variables in a locked code file). Issue a `clear java` command after modifying any files on the dynamic Java path.

Value of ItemTyp	Items Cleared								Notes
	Variab in scope	Scripts and functio	Class definiti	Persis varia	MEX functio	Globa varia	Impor list	Java classes on the dynamic path	
mex					✓				clear mex does not clear locked MEX functions or functions that are currently in use.
variabl	✓								

Note: If the name of a variable is a value of `ItemType`, then calling `clear` followed by that name deletes the variable with that name. `clear` does not interpret the name as a keyword in this context. For example, if the workspace contains variables `a`, `all`, `b`, and `ball`, `clear all` removes the variable `all` only.

Tips

- Calling `clear all`, `clear classes`, and `clear functions` decreases code performance, and is usually unnecessary.
  - To clear one or more specific variables from the current workspace, use `clear` *`name1 ... nameN`*.
  - To clear all variables from the current workspace, use `clear` or `clearvars`.
  - To clear all global variables, use `clear global` or `clearvars -global`.
  - To clear a particular class, use `clear` *`myClass`*.
  - To clear a particular function or script, use `clear` *`functionName`*.
  - To clear all MEX functions, use `clear mex`.
- The `clear` function can remove variables that you specify. To remove all except a few specified variables, use `clearvars` instead.
- If you clear the handle of a figure or graphics object, the object itself is not removed. Use `delete` to remove objects. On the other hand, deleting an object does not remove the variable (if any) used for storing its handle.

- The `clear` function does not clear Simulink® models. Use `bdclose` instead.
- On UNIX systems, `clear` does not affect the amount of memory allocated to the MATLAB process.

See Also

See Also

`clc` | `clearvars` | `delete` | `import` | `inmem` | `load` | `mlock` | `whos`

Topics

"Base and Function Workspaces"
"Strategies for Efficient Use of Memory"
"Automatic Updates for Modified Classes"
"Java Class Path"
"Regular Expressions"

Introduced before R2006a

clearAllMemoizedCaches

Clear caches for all `MemoizedFunction` objects

Syntax

```
clearAllMemoizedCaches
```

Description

`clearAllMemoizedCaches` clears caches for all `MemoizedFunction` objects.

Examples

Clear All Memoized Function Caches

Create two memoized functions, and call them several times.

```
mf1 = memoize(@sin);
mf2 = memoize(@cos);

a = [mf1(0) mf1(pi/2) mf1(pi)];
b = mf2(pi/2);
```

View the statistics for the memoized function objects.

```
mf1.stats.Cache
```

```
ans = struct with fields:
         Inputs: {{1×1 cell}  {1×1 cell}  {1×1 cell}}
        Nargout: [1 1 1]
        Outputs: {{1×1 cell}  {1×1 cell}  {1×1 cell}}
       HitCount: [0 0 0]
      TotalHits: 0
    TotalMisses: 3
```

```
mf2.stats.Cache
```

```
ans = struct with fields:
```

```
         Inputs: {{1×1 cell}}
        Nargout: 1
        Outputs: {{1×1 cell}}
       HitCount: 0
      TotalHits: 0
    TotalMisses: 1
```

Clear all memoized function caches, and view the statistics again.

```
clearAllMemoizedCaches
mf1.stats.Cache
```

```
ans = struct with fields:
         Inputs: {}
        Nargout: []
        Outputs: {}
       HitCount: []
      TotalHits: 0
    TotalMisses: 0
```

```
mf2.stats.Cache
```

```
ans = struct with fields:
         Inputs: {}
        Nargout: []
        Outputs: {}
       HitCount: []
      TotalHits: 0
    TotalMisses: 0
```

See Also

See Also

Functions

`clearCache` | `memoize`

Using Objects

`MemoizedFunction`

Introduced in R2017a

clearCache

Clear cache for `MemoizedFunction` object

Syntax

```
clearCache(mfcn)
```

Description

`clearCache(mfcn)` clears the cache for a `MemoizedFunction` object.

The memoization of a function is associated with the input function and not with the `MemoizedFunction` object. Therefore, clearing a variable does not clear the cache associated with the input function.

A `MemoizedFunction` object is not aware of updates to the underlying function. If you modify the function associated with the memoized function, use `clearCache` to clear the cache.

Examples

Clear Memoized Function Caches

Create a memoized function object for the `sin` function, and call it several times.

```
mf = memoize(@sin);
a = mf(0);
b = mf(pi/2);
c = mf(0);
```

View the statistics for the object.

```
mf.stats.Cache
```

```
ans = struct with fields:
         Inputs: {{1×1 cell}  {1×1 cell}}
        Nargout: [1 1]
```

```
        Outputs: {{1×1 cell}  {1×1 cell}}
       HitCount: [1 0]
      TotalHits: 1
    TotalMisses: 2
```

Clear the memoized function object cache, and view the statistics.

```
mf.clearCache
mf.stats.Cache
```

```
ans = struct with fields:
         Inputs: {}
        Nargout: []
        Outputs: {}
       HitCount: []
      TotalHits: 0
    TotalMisses: 0
```

Input Arguments

`mfcn` — Function with memoization semantics
`MemoizedFunction` object

Function with memoization semantics, specified as a `MemoizedFunction` object.

Tips

- Two variables that memoize the same function share a cache and object property values, such as cache size. In the following example, the variables `a` and `b` share a cache and have the same value for cache size.

  ```
  a = memoize(@svd);
  b = memoize(@svd);
  ```

  Clearing the cache for `b` (`b.clearCache`) also clears the cache for `a`, and any other variables that memoize the `svd` function.
- Clearing a variable does not clear the cache associated with the input function. To clear the cache for a `MemoizedFunction` object that no longer exists in the

workspace, create a new `MemoizedFunction` object to the same function, and use the `clearCache` function on the new object. Alternatively, you can clear caches for all `MemoizedFunction` objects using the `clearAllMemoizedCaches` function.

See Also

See Also

Functions
`clearAllMemoizedCaches` | `memoize`

Using Objects
`MemoizedFunction`

Introduced in R2017a

clearpoints

Clear points from animated line

Syntax

```
clearpoints(h)
```

Description

`clearpoints(h)` clears all points from the animated line specified by `h`. Create an animated line with the `animatedline` function. If you want to display the update on the screen, use `drawnow` after using `clearpoints`. For more information on line animations, see AnimatedLine.

Examples

Clear Points from Animated Line

Create an animated line with 10 points. Then, clear the points stored in the animated line.

```
h = animatedline(1:10,1:10);
clearpoints(h)
```

The animated line still exists, but has no data.

Input Arguments

`h` — `AnimatedLine` object
`AnimatedLine` object

`AnimatedLine` object. Create an `AnimatedLine` object using the `animatedline` function.

See Also

See Also

Functions
`addpoints` | `animatedline` | `getpoints`

Using Objects
AnimatedLine

Introduced in R2014b

clearvars

Clear variables from memory

Syntax

```
clearvars
clearvars variables
clearvars -except keepVariables
clearvars variables -except keepVariables

clearvars -global ___
```

Description

`clearvars` removes all variables from the currently active workspace.

`clearvars variables` removes the variables specified by `variables`. If any of the variables are global, `clearvars` removes these variables from the current workspace only, leaving them accessible to any functions that declare them as global.

`clearvars -except keepVariables` removes all variables, except for those specified by `keepVariables`. Use this syntax to keep specific variables and remove all others.

`clearvars variables -except keepVariables` removes the variables specified by `variables`, and does not remove the variables specified by `keepVariables`. This syntax allows you to use a combination of variable names, wild card characters, or regular expressions to specify variables to remove or keep.

`clearvars -global ___` removes the specified global variables from the workspace, including those made global within functions, using any of the input arguments in the preceding syntaxes. The `-global` flag must be first in the argument list.

Examples

Clear Named Variables

Define three variables, `a`, `b`, and `c`. Then, clear `a` and `c`.

```
a = 1;
b = 2;
c = 3;
clearvars a c
whos
```

```
  Name      Size            Bytes  Class     Attributes

  b         1x1                 8  double
```

Only variable b remains in the workspace.

Clear All Variables Except Specified

Remove all variables from the workspace except for the variables C and D.

```
clearvars -except C D
```

Clear Variables Using Regular Expressions and Name Variables to Exclude

Clear variables with names that start with b and are followed by 3 digits, except for the variable b106.

```
clearvars -regexp ^b\d{3}$ -except b106
```

Name Variables to Clear and Preserve Variables Using Regular Expressions

Clear variables with names that start with a and do not end with a.

```
clearvars a* -except -regexp a$
```

Clear Global Variables Except Specified

Clear all global variables, except those with names that start with x.

```
clearvars -global -except x*
```

Clear List of Variables

Clear a list of variables used for intermediate calculations.

Create two variables in the workspace.

```
cashOnHand = 20;
cost = 12.99;
```

Store a list of the names of all the variables currently in the workspace.

```
initialVars = who;
```

Specify or calculate additional variables, `taxRate` and `tax`.

```
taxRate = 0.0625;
tax = round(100*cost*taxRate)/100;
```

Update the initial variables, `cost` and `cashOnHand`.

```
cost = cost + tax;
cashOnHand = cashOnHand - cost;
```

Clear all variables except the initial variables, using the function form of `clearvars`. When using the function form of a syntax, enclose input character vectors in single quotes, and separate them with commas.

```
clearvars('-except',initialVars{:})
```

`clearvars` clears the variables, `initialVars`, `taxRate`, and `tax`.

Input Arguments

`variables` — Names of variables to remove

character vectors

Names of variables to remove, specified as one or more character vectors in one of these forms.

Form of `Variables` Input	Variables to Remove
`var1 ... varN`	Named variables. Use the `'*'` wildcard to match patterns. For example, `clearvars A*` clears all variables in the workspace with names that start with `A`.

Form of `Variables` Input	Variables to Remove
`-regexp` *`expr1 ... exprN`*	Variables with names that match the regular expressions. For example, `clearvars -regexp ^Mon ^Tues` clears only the variables in the workspace with names that begin with `Mon` or `Tues`.

`keepVariables` — Names of variables to keep
character vectors

Names of variables to keep, specified as one or more character vectors, in one of these forms.

Form of `Variables` Input	Variables to Keep
`var1 ... varN`	Named variables. Use the `'*'` wildcard to match patterns. For example, `clearvars -except A*` clears all variables in the workspace, except those with names that start with `A`.
`-regexp` *`expr1 ... exprN`*	Variables with names that match the regular expressions. For example, `clearvars -except -regexp ^Mon ^Tues` clears all the variables in the workspace, except those with names that begin with `Mon` or `Tues`.

See Also

See Also

`clear` | `exist` | `global` | `persistent` | `save` | `who` | `whos`

Topics

"Create and Edit Variables"
"Regular Expressions"
"Command vs. Function Syntax"

Introduced in R2008a

clear (serial)

Remove serial port object from MATLAB workspace

Syntax

```
clear obj
```

Description

`clear obj` removes `obj` from the MATLAB workspace, where `obj` is a serial port object or an array of serial port objects.

Examples

This example creates the serial port object `s` on a Windows platform, copies `s` to a new variable `scopy`, and clears `s` from the MATLAB workspace. `s` is then restored to the workspace with `instrfind` and is shown to be identical to `scopy`.

```
s = serial('COM1');
scopy = s;
clear s
s = instrfind;
isequal(scopy,s)
ans =
     1
```

Tips

If `obj` is connected to the device and it is cleared from the workspace, then `obj` remains connected to the device. You can restore `obj` to the workspace with the `instrfind` function. A serial port object connected to the device has a `Status` property value of `open`.

To disconnect `obj` from the device, use the `fclose` function. To remove `obj` from memory, use the `delete` function. You should remove invalid serial port objects from the workspace with `clear`.

See Also

`delete` | `isvalid` | `fclose` | `instrfind` | `Status`

Introduced before R2006a

clf

Clear current figure window

Syntax

```
clf
clf('reset')
clf(fig)
clf(fig,'reset')
figure_handle = clf(...)
```

Description

`clf` deletes from the current figure all graphics objects whose handles are not hidden (i.e., their `HandleVisibility` property is set to `on`).

`clf('reset')` deletes from the current figure all graphics objects regardless of the setting of their `HandleVisibility` property and resets all figure properties except Position, Units, PaperPosition, and PaperUnits to their default values.

`clf(fig)` or `clf(fig,'reset')` clears the single figure with handle `fig`.

`figure_handle = clf(...)` returns the handle of the figure. This is useful when the figure IntegerHandle property is `off` because the noninteger handle becomes invalid when the reset option is used (i.e., `IntegerHandle` is reset to `on`, which is the default).

Alternatives

Use **Clear Figure** from the figure window's **Edit** menu to clear the contents of a figure. You can also create a *desktop shortcut* to clear the current figure with one mouse click. See “Create Shortcuts to Rerun Commands”.

Tips

The `clf` command behaves the same way when issued on the command line as it does in callback routines — it does not recognize the `HandleVisibility` setting of `callback`.

This means that when issued from within a callback routine, `clf` deletes only those objects whose `HandleVisibility` property is set to `on`.

See Also

`cla` | `clc` | `hold` | `reset`

Introduced before R2006a

clipboard

Copy and paste text to and from system clipboard

Syntax

```
clipboard('copy',data)
txt = clipboard('paste')
data = clipboard('pastespecial')
```

Description

`clipboard('copy',data)` copies `data` to the clipboard. If `data` is not a character array, it is converted using `mat2str`.

Note: The `clipboard` function requires Oracle® Java software.

`txt = clipboard('paste')` returns the current contents of the clipboard as a character vector. If `clipboard` cannot convert the contents, `txt` is empty (`''`).

`data = clipboard('pastespecial')` imports the clipboard contents into an array using `uiimport`.

See Also

`load` | `mat2str` | `uiimport`

Introduced before R2006a

clock

Current date and time as date vector

Syntax

```
c = clock
```

Description

`c = clock` returns a six-element date vector containing the current date and time in decimal form:

```
[year month day hour minute seconds]
```

Examples

Round clock Output to Integer Display

Use `clock` to return the current date and time.

```
format shortg
c = clock
```

```
c =
        2017           2          24          13          38      51.097
```

The sixth element of the date vector output (seconds) is accurate to several digits beyond the decimal point.

Use the `fix` function to round to integer display format.

```
fix(c)
```

```
ans =
      2017           2          24          13          38          51
```

Tips

- To time the duration of an event, use the `timeit` or `tic` and `toc` functions instead of `clock` and `etime`. The `clock` function is based on the system time, which can be adjusted periodically by the operating system, and thus might not be reliable in time comparison operations.
- To return a datetime scalar representing the current date and time, type:

```
t = datetime('now')
```

See Also

See Also

`cputime` | `date` | `datetime` | `etime` | `fix` | `now` | `tic` | `timeit` | `toc`

Introduced before R2006a

close

Remove specified figure

Syntax

```
close
close(h)
close name
close all
close all hidden
close all force
status = close(...)
```

Description

`close` deletes the current figure or the specified figure(s). It optionally returns the status of the close operation.

`close` deletes the current figure (equivalent to `close(gcf)`).

`close(h)` deletes the figure identified by `h`. If `h` is an array, `close` deletes all figures identified by `h`. `h` can also be the figure Number.

`close name` deletes the figure with the specified name.

`close all` deletes all figures whose handles are not hidden.

`close all hidden` deletes all figures including those with hidden handles.

`close all force` deletes all figures, including GUIs for which `CloseRequestFcn` has been altered to not close the window.

`status = close(...)` returns `1` if the specified windows have been deleted and `0` otherwise.

Algorithms

The `close` function works by evaluating the specified figure's CloseRequestFcn property with the statement

```
eval(get(h,'CloseRequestFcn'))
```

The default `CloseRequestFcn`, `closereq`, deletes the current figure using `delete(get(groot,'CurrentFigure'))`. If you specify an array of figure handles, `close` executes each figure's `CloseRequestFcn` in turn. If an error that terminates the execution of a `CloseRequestFcn` occurs, the figure is not deleted. Note that using your computer's window manager (i.e., the **Close** menu item) also calls the figure's `CloseRequestFcn`.

If a figure's handle is hidden (i.e., the figure's HandleVisibility property is set to `callback` or `off` and the root ShowHiddenHandles property is set to `on`), you must specify the `hidden` option when trying to access a figure using the `all` option.

To delete all figures unconditionally, use the statements

```
set(groot,'ShowHiddenHandles','on')
c = get(groot,'Children');
delete(c)
```

The figure `CloseRequestFcn` allows you to either delay or abort the closing of a figure once the `close` function has been issued. For example, you can display a dialog box to see if the user really wants to delete the figure or save and clean up before closing.

When coding a `CloseRequestFcn` callback, make sure that it does not call `close`, because this sets up a recursion that results in a MATLAB warning. Instead, the callback should destroy the figure with `delete`. The `delete` function does not execute the figure's `CloseRequestFcn`; it deletes the specified figure.

See Also

`delete` | `figure` | `gcf`

Introduced before R2006a

close

Class: Tiff

Close Tiff object

Syntax

```
close(tiffobj)
```

Description

`close(tiffobj)` closes a Tiff object.

Examples

Close Tiff Object

Open a Tiff object and then close it.

```
t = Tiff('example.tif','r');
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFClose` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

close

Class: FTP

Close connection to FTP server

Syntax

```
close(ftpobj)
```

Description

`close(ftpobj)` closes the connection to the FTP server.

Input Arguments

`ftpobj`

FTP object created by ftp.

Examples

Connect to the National Geophysical Data Center (NGDC) FTP server, and then disconnect:

```
ngdc = ftp('ftp.ngdc.noaa.gov');
close(ngdc)
```

FTP service courtesy of the NGDC. See NGDC Privacy Policy, Disclaimer, and Copyright for NGDC terms of service.

Tips

- If you do not run `close` at the end of your session, the connection either times out automatically or terminates when you exit MATLAB.

- After calling `close`, calling any other FTP method on the same object automatically reopens the connection.
- `close` does not return any output to indicate success or failure.

See Also

ftp

Introduced before R2006a

closereq

Default figure close request function

Syntax

```
closereq
```

Description

`closereq` deletes the current figure. For more information, see the CloseRequestFcn figure property.

Introduced before R2006a

cmopts

(To be removed) Name of source control system

Note: `cmopts` will be removed in a future release. View the currently selected source control system through **Preferences** instead.

Syntax

```
cmopts
```

Description

`cmopts` returns the name of your version control system.

Output Arguments

Value Returned by cmopts	Description	Platform Supported On
`clearcase`	ClearCase® software from IBM® Rational®	UNIX platforms
`customverctrl`	Custom interface created using `customverctrl` function	UNIX platforms
`cvs`	Concurrent Version System (CVS)	UNIX platforms
`none`	No source control system selected	
`pvcs`	PVCS® and ChangeMan® software	UNIX platforms
`rcs`	Revision Control System (RCS)	UNIX platforms

Value Returned by cmopts	Description	Platform Supported On
Any SCC-compliant source control system, for example, `Microsoft Visual SourceSafe`	Varies	Windows platforms

Alternatives

To view the currently selected source control system, click the **Preferences** button on the **Home** tab, and select **General** > **Source Control**.

Introduced before R2006a

cmpermute

Rearrange colors in colormap

Syntax

```
[Y,newmap] = cmpermute(X,map)
[Y,newmap] = cmpermute(X,map,index)
```

Description

`[Y,newmap] = cmpermute(X,map)` randomly reorders the colors in `map` to produce a new colormap, `newmap`. The `cmpermute` function also modifies the values in `X` to maintain correspondence between the indices and the colormap, and returns the result in `Y`. The image `Y` and associated colormap, `newmap`, produce the same image as `X` and `map`.

`[Y,newmap] = cmpermute(X,map,index)` uses an ordering matrix (such as the second output of `sort`) to define the order of colors in the new colormap.

Class Support

The input image `X` can be of class `uint8` or `double`. `Y` is returned as an array of the same class as `X`.

Examples

Randomly Reorder Colormap and Display Image

Load the `clown` data set to get image `X` and its associated colormap, `map`. Display the image.

```
load clown
figure
image(X)
colormap(map)
```

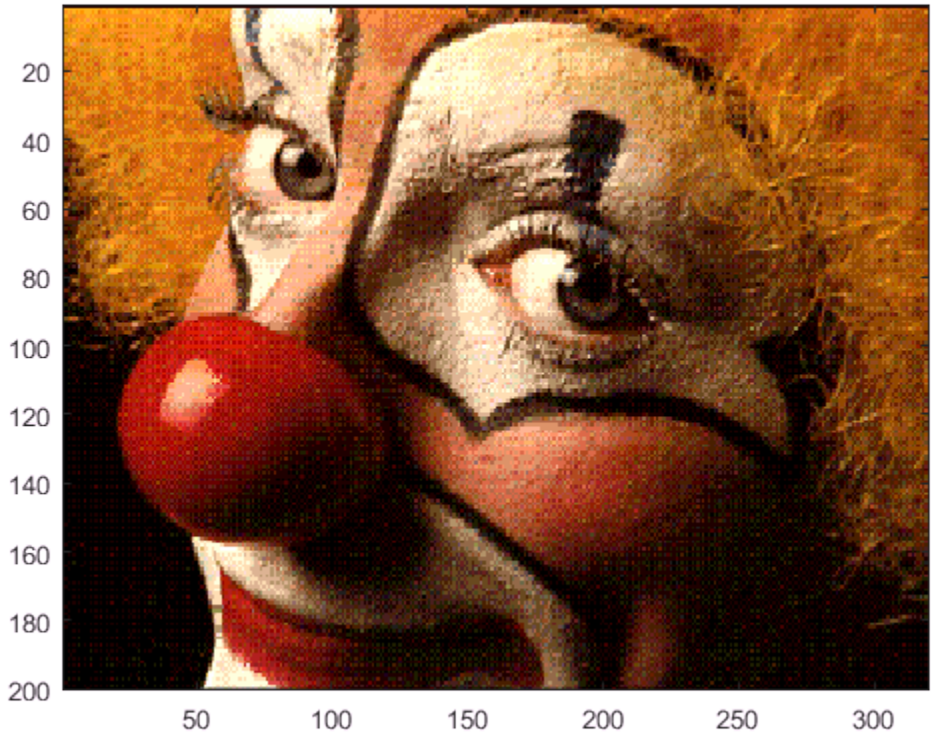

Randomly reorder the colormap to get the new colormap, `newmap`. Display image `X` with the new colormap.

```
[Y, newmap] = cmpermute(X,map);
colormap(newmap)
```

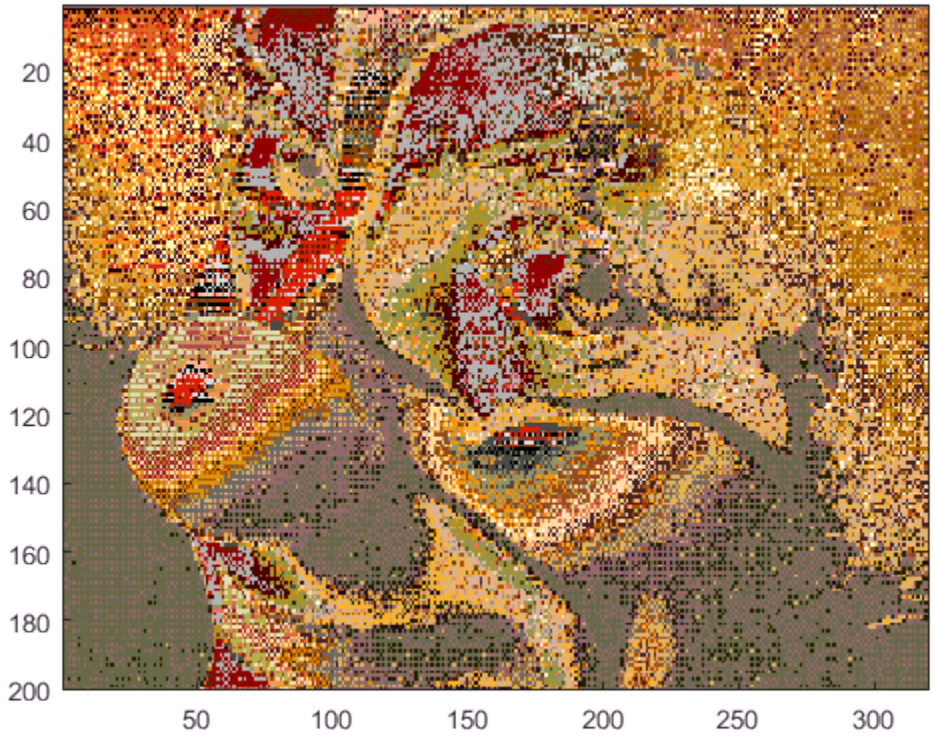

See Also

`randperm` | `sort`

cmunique

Eliminate duplicate colors in colormap; convert grayscale or truecolor image to indexed image

Syntax

```
[Y,newmap] = cmunique(X,map)
[Y,newmap] = cmunique(RGB)
[Y,newmap] = cmunique(I)
```

Description

`[Y,newmap] = cmunique(X,map)` returns the indexed image `Y` and associated colormap, `newmap`, that produce the same image as `(X,map)` but with the smallest possible colormap. The `cmunique` function removes duplicate rows from the colormap and adjusts the indices in the image matrix accordingly.

`[Y,newmap] = cmunique(RGB)` converts the truecolor image `RGB` to the indexed image `Y` and its associated colormap, `newmap`. The return value `newmap` is the smallest possible colormap for the image, containing one entry for each unique color in `RGB`.

Note: `newmap` might be very large, because the number of entries can be as many as the number of pixels in `RGB`.

`[Y,newmap] = cmunique(I)` converts the grayscale image `I` to an indexed image `Y` and its associated colormap, `newmap`. The return value, `newmap`, is the smallest possible colormap for the image, containing one entry for each unique intensity level in `I`.

Class Support

The input image can be of class `uint8`, `uint16`, or `double`. The class of the output image `Y` is `uint8` if the length of `newmap` is less than or equal to 256. If the length of `newmap` is greater than 256, `Y` is of class `double`.

Examples

Eliminate Duplicate Entries in Colormap

Use the `magic` function to define `X` as a 4-by-4 array that uses every value in the range between 1 and 16.

```
X = magic(4);
```

Use the `gray` function to create an eight-entry colormap. Then, concatenate the two eight-entry colormaps to create a colormap with 16 entries, `map`. In `map`, entries 9 through 16 are duplicates of entries 1 through 8.

```
map = [gray(8); gray(8)];
size(map)
```

```
ans =

    16     3
```

Use `cmunique` to eliminate duplicate entries in the colormap.

```
[Y, newmap] = cmunique(X, map);
size(newmap)
```

```
ans =

     8     3
```

`cmunique` adjusts the values in the original image `X` so that `Y` and `newmap` produce the same image as `X` and `map`.

```
figure
image(X)
colormap(map)
title('X and map')
```

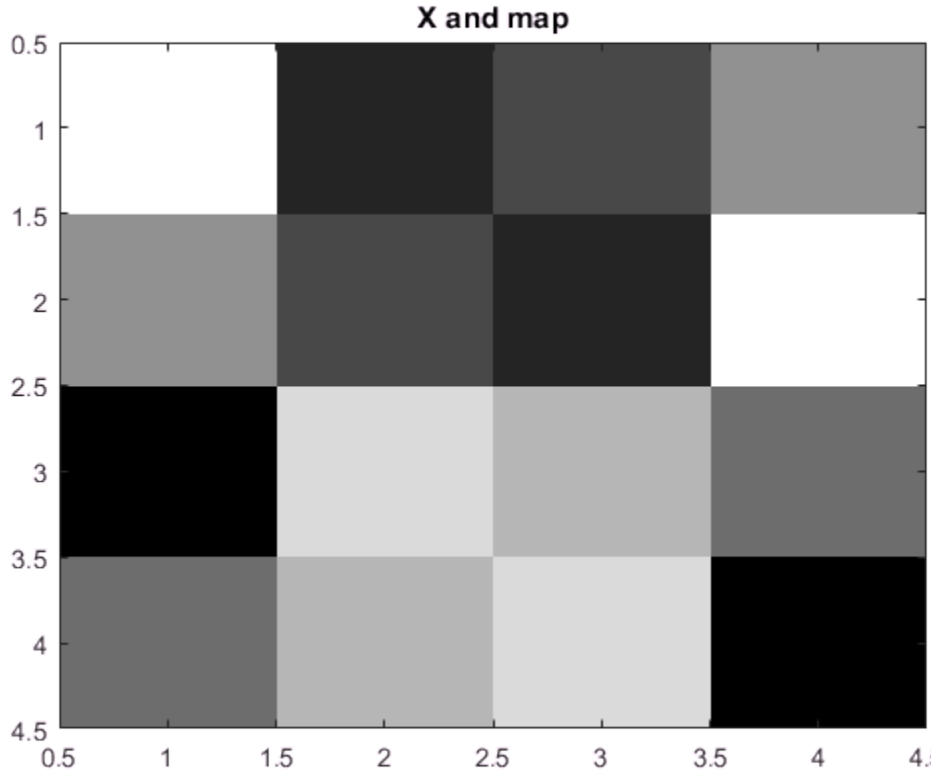


```
figure
image(Y)
colormap(newmap)
title('Y and newmap')
```

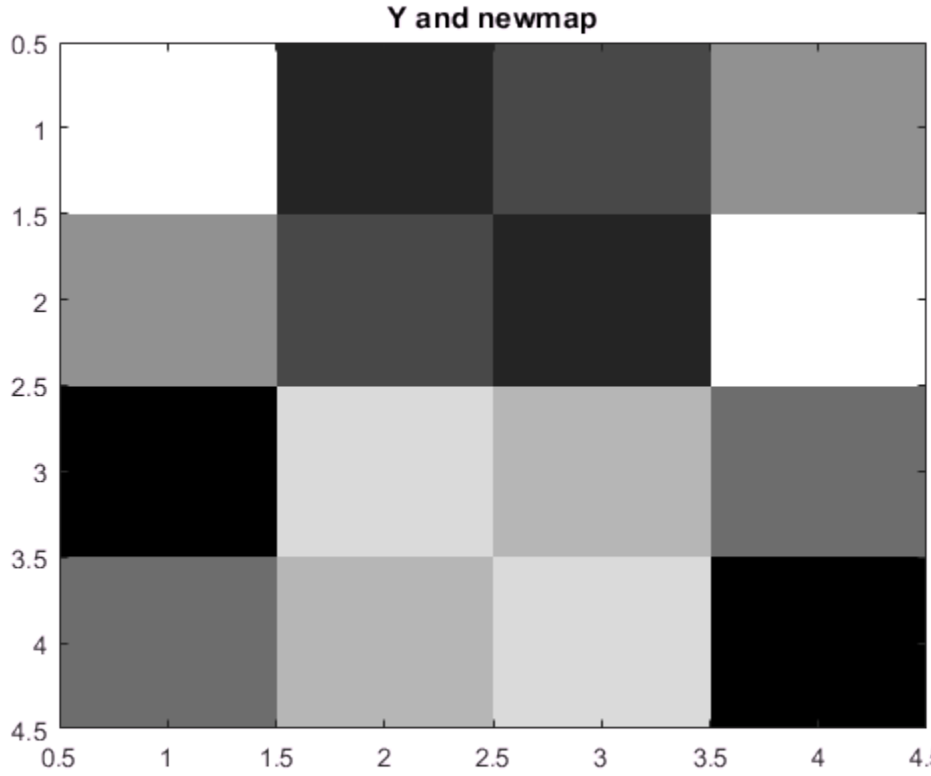

See Also

`rgb2ind`

colamd

Column approximate minimum degree permutation

Syntax

```
p = colamd(S)
```

Description

`p = colamd(S)` returns the column approximate minimum degree permutation vector for the sparse matrix `S`. For a non-symmetric matrix `S`, `S(:,p)` tends to have sparser LU factors than `S`. The Cholesky factorization of `S(:,p)' * S(:,p)` also tends to be sparser than that of `S'*S`.

`knobs` is a two-element vector. If S is `m`-by-`n`, then rows with more than `(knobs(1))*n` entries are ignored. Columns with more than `(knobs(2))*m` entries are removed prior to ordering, and ordered last in the output permutation `p`. If the `knobs` parameter is not present, then `knobs(1)` = `knobs(2) = spparms('wh_frac')`.

`stats` is an optional vector that provides data about the ordering and the validity of the matrix `S`.

`stats(1)`	Number of dense or empty rows ignored by `colamd`
`stats(2)`	Number of dense or empty columns ignored by `colamd`
`stats(3)`	Number of garbage collections performed on the internal data structure used by `colamd` (roughly of size `2.2*nnz(S) + 4*m + 7*n` integers)
`stats(4)`	`0` if the matrix is valid, or `1` if invalid
`stats(5)`	Rightmost column index that is unsorted or contains duplicate entries, or `0` if no such column exists
`stats(6)`	Last seen duplicate or out-of-order row index in the column index given by `stats(5)`, or `0` if no such row index exists
`stats(7)`	Number of duplicate and out-of-order row indices

Although MATLAB built-in functions generate valid sparse matrices, a user may construct an invalid sparse matrix using the MATLAB C or Fortran APIs and pass it to `colamd`. For this reason, `colamd` verifies that `S` is valid:

- If a row index appears two or more times in the same column, `colamd` ignores the duplicate entries, continues processing, and provides information about the duplicate entries in `stats(4:7)`.
- If row indices in a column are out of order, `colamd` sorts each column of its internal copy of the matrix `S` (but does not repair the input matrix `S`), continues processing, and provides information about the out-of-order entries in `stats(4:7)`.
- If `S` is invalid in any other way, `colamd` cannot continue. It prints an error message, and returns no output arguments (`p` or `stats`) .

The ordering is followed by a column elimination tree post-ordering.

Examples

Compare Sparse Matrix and LU Factorization

The Harwell-Boeing collection of sparse matrices and the MATLAB® demos directory include a test matrix `west0479`. It is a matrix of order 479 resulting from a model due to Westerberg of an eight-stage chemical distillation column. The spy plot shows evidence of the eight stages. The `colamd` ordering scrambles this structure.

```
load west0479
A = west0479;
p = colamd(A);

figure()
subplot(1,2,1), spy(A,4), title('A')
subplot(1,2,2), spy(A(:,p),4), title('A(:,p)')
```

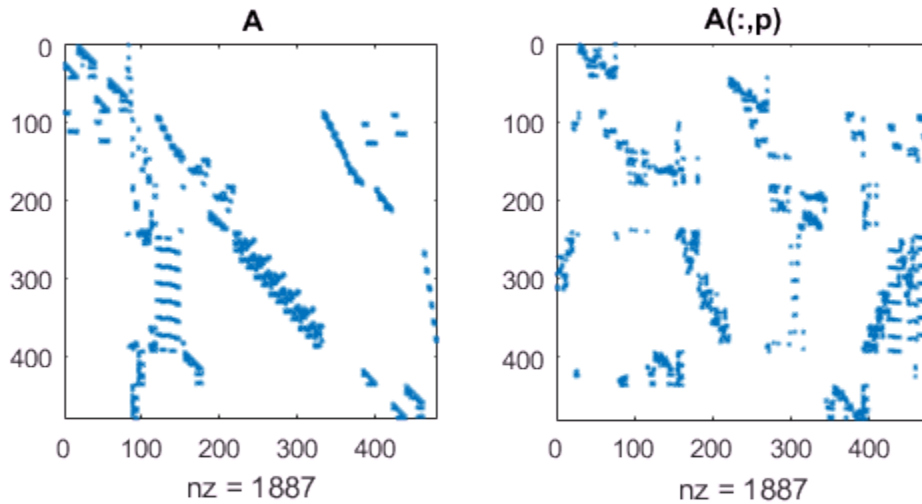

Comparing the spy plot of the LU factorization of the original matrix with that of the reordered matrix shows that minimum degree reduces the time and storage requirements by better than a factor of 2.8. The nonzero counts are 15918 and 5920, respectively.

```
figure()
subplot(1,2,1), spy(lu(A),4), title('lu(A)')
subplot(1,2,2), spy(lu(A(:,p)),4), title('lu(A(:,p))')
```

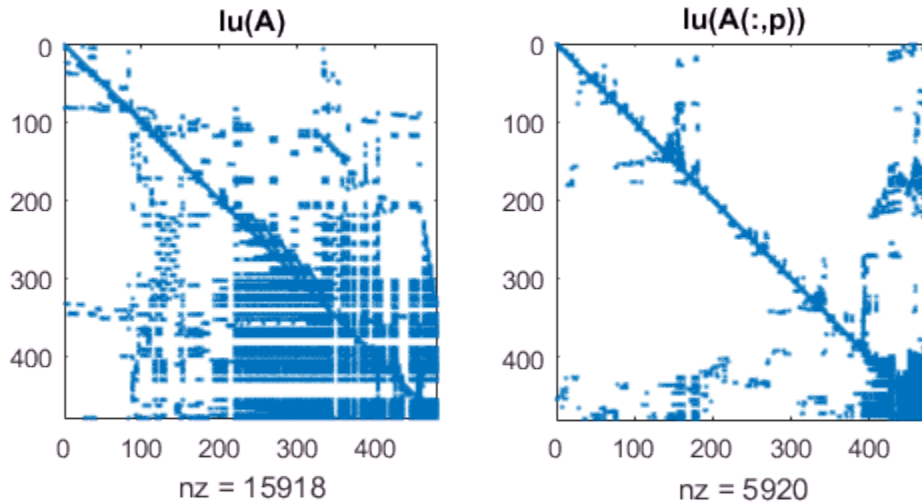

References

[1] The authors of the code for “colamd” are Stefan I. Larimore and Timothy A. Davis (davis@cise.ufl.edu), University of Florida. The algorithm was developed in collaboration with John Gilbert, Xerox PARC, and Esmond Ng, Oak Ridge National Laboratory. Sparse Matrix Algorithms Research at the University of Florida: http://www.cise.ufl.edu/research/sparse/

See Also

`colperm` | `symamd` | `symrcm` | `spparms`

Introduced before R2006a

colorbar

Colorbar showing color scale

Syntax

```
colorbar
colorbar(target)
colorbar('peer',target)

colorbar('off')
colorbar(target,'off')

colorbar( ___ ,lcn)
colorbar( ___ ,Name,Value)
c = colorbar( ___ )

colorbar(c,'off')
```

Description

`colorbar` displays a vertical colorbar to the right of the axes or chart returned by the `gca` command. Colorbars display the current colormap and indicate the mapping of data values into the colormap.

`colorbar(target)` adds a colorbar to the axes or chart specified by `target`.

`colorbar('peer',target)` adds a colorbar to the axes specified by `target`. This syntax is not recommended and might be removed in a future release. Use `colorbar(target)` instead.

`colorbar('off')` deletes colorbars associated with the axes or chart returned by the `gca` command.

`colorbar(target,'off')` deletes colorbars associated with the axes or chart specified by `target`.

`colorbar( ___ ,lcn)` displays the colorbar in the location specified by `lcn`, such as `'northoutside'`. Not all types of charts support modifying the colorbar location.

`colorbar( ___ ,Name,Value)` modifies the colobar appearance using one or more name-value pair arguments. For example, `'Direction','reverse'` reverses the color scale. Not all types of charts support modifying the colorbar appearance.

`c = colorbar( ___ )` returns the `Colorbar` object. Use `c` to set properties of the `Colorbar` object after it is created.

Note: Starting in R2014b, the `colorbar` function returns a `Colorbar` object. In previous releases it returns an `Axes` object.

`colorbar(c,'off')` deletes the colorbar specified by `c`.

Examples

Add Colorbar to Graph

Add a colorbar to a surface plot indicating the color scale.

```
figure
surf(peaks)
colorbar
```

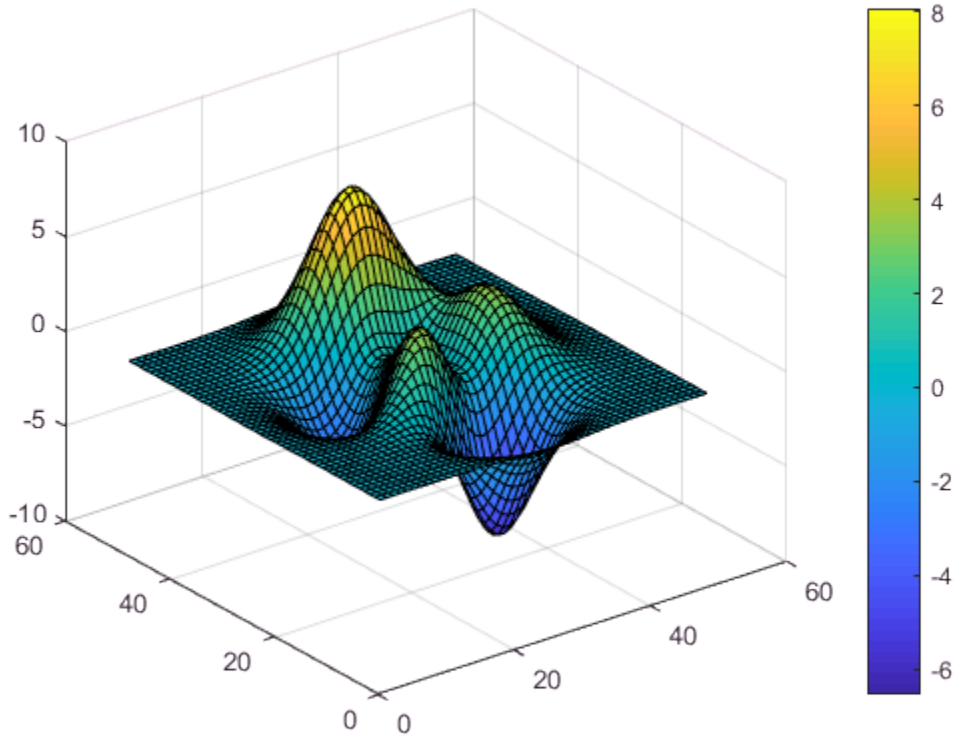

By default, the `colorbar` function adds a vertical colorbar to the right side of the graph.

Add Horizontal Colorbar to Graph

Add a horizontal colorbar below a plot by specifying the colorbar location as `'southoutside'`.

```
figure
contourf(peaks)
colorbar('southoutside')
```

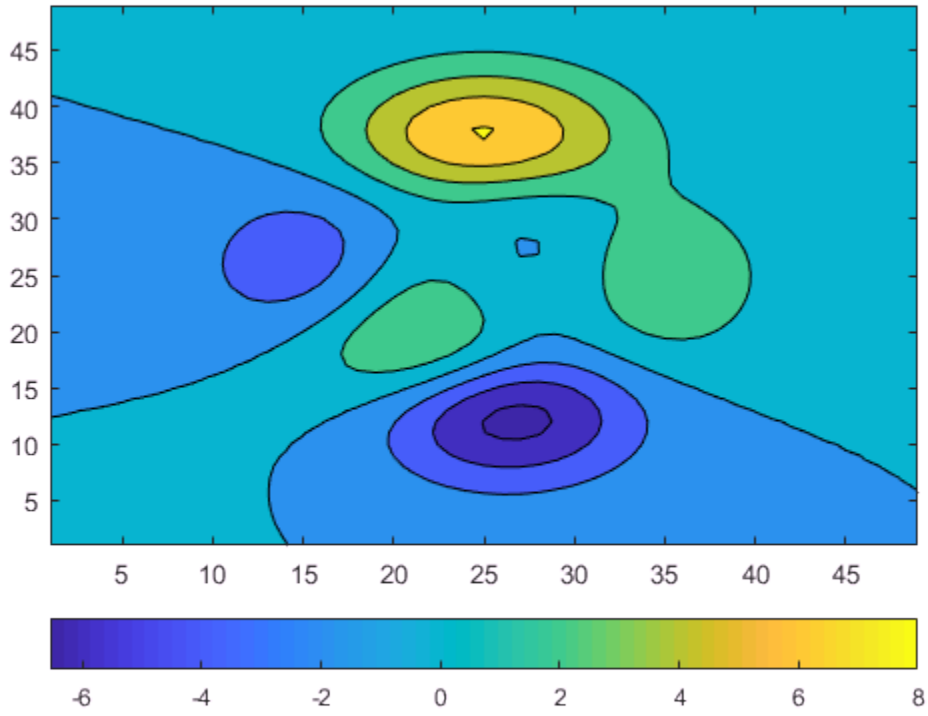

Reverse Colorbar Direction

Reverse the direction of values in a colorbar on a graph by setting the `'Direction'` property of the colorbar to `'reverse'`.

```
figure
surf(peaks)
colorbar('Direction','reverse')
```

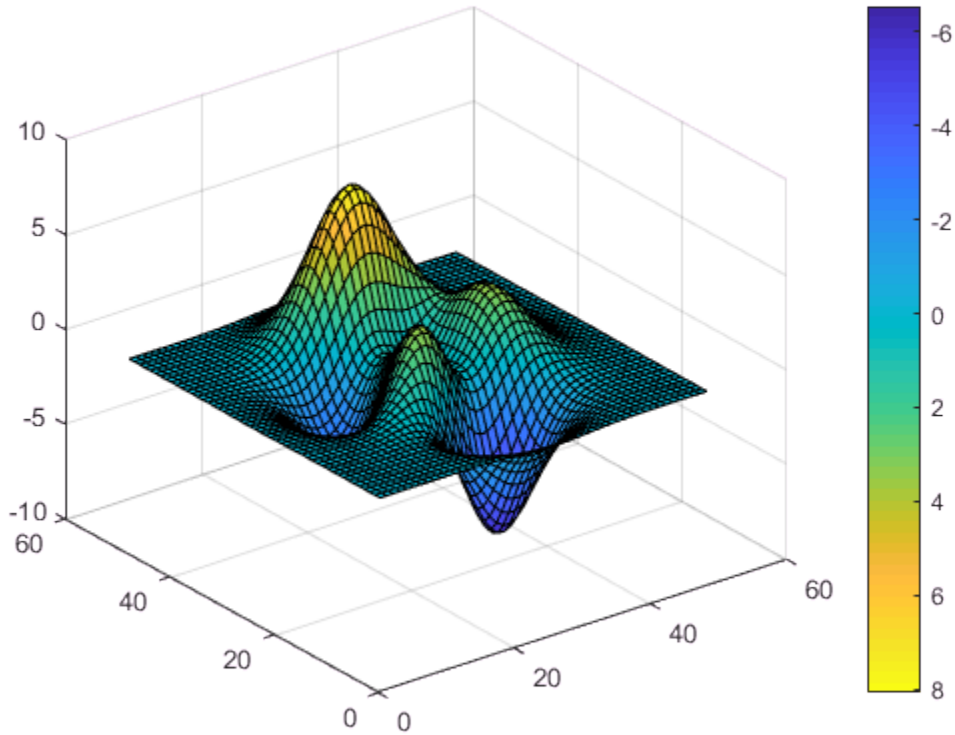

The colorbar values ascend from top to bottom instead of ascending from bottom to top.

Display Colorbar Ticks on Opposite Side

Display the colorbar tick marks and tick labels on the side of a colorbar facing the surface plot.

```
surf(peaks)
colorbar('AxisLocation','in')
```

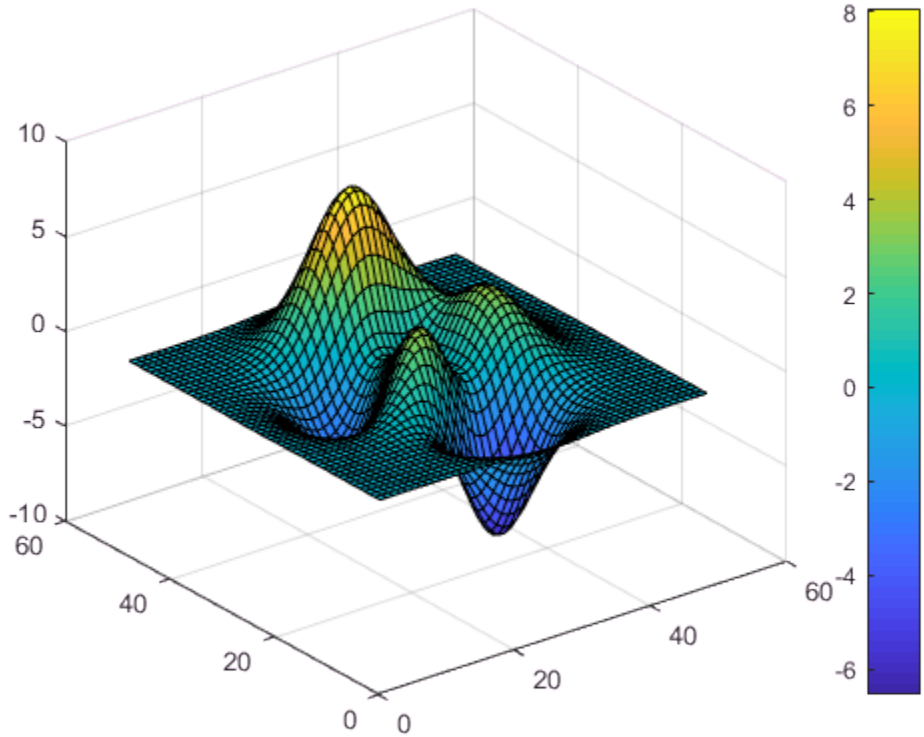

Add Colorbars to Subplots

Create a figure with two subplots. Add colorbars to both subplots.

```
figure
subplot(2,1,1) % upper subplot
surf(peaks)
colorbar

subplot(2,1,2) % lower subplot
contourf(peaks)
colorbar
```

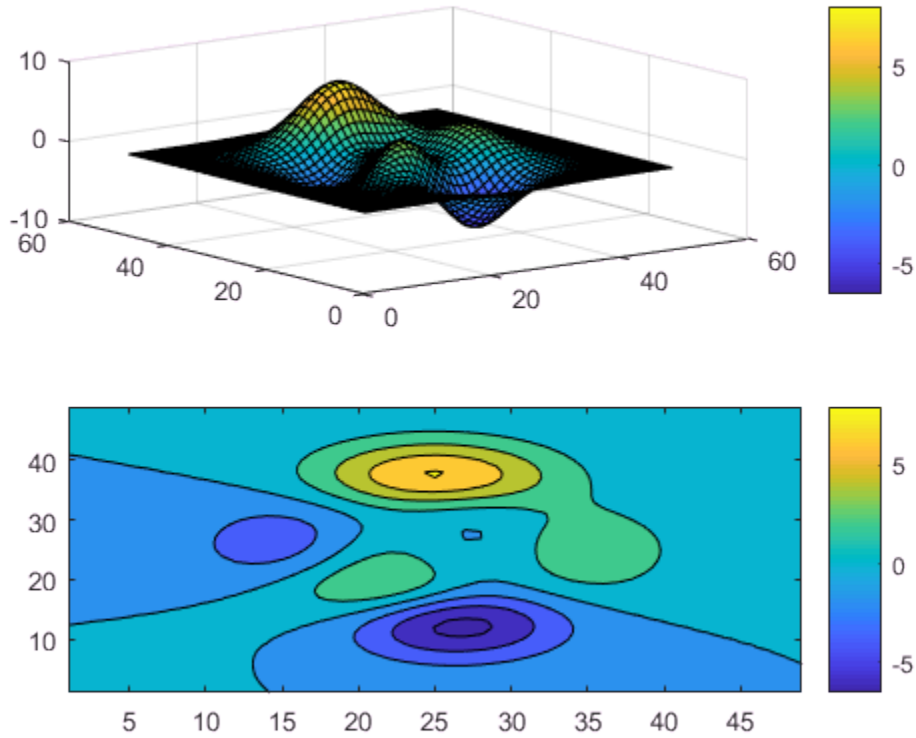

Specify Colorbar Ticks and Tick Labels

Add a colorbar to a plot and specify the colorbar tick marks and tick labels. Specify the same number of tick labels as tick marks. If you do not specify enough tick labels, then the `colorbar` function repeats the labels.

```
contourf(peaks)
colorbar('Ticks',[-5,-2,1,4,7],...
         'TickLabels',{'Cold','Cool','Neutral','Warm','Hot'})
```

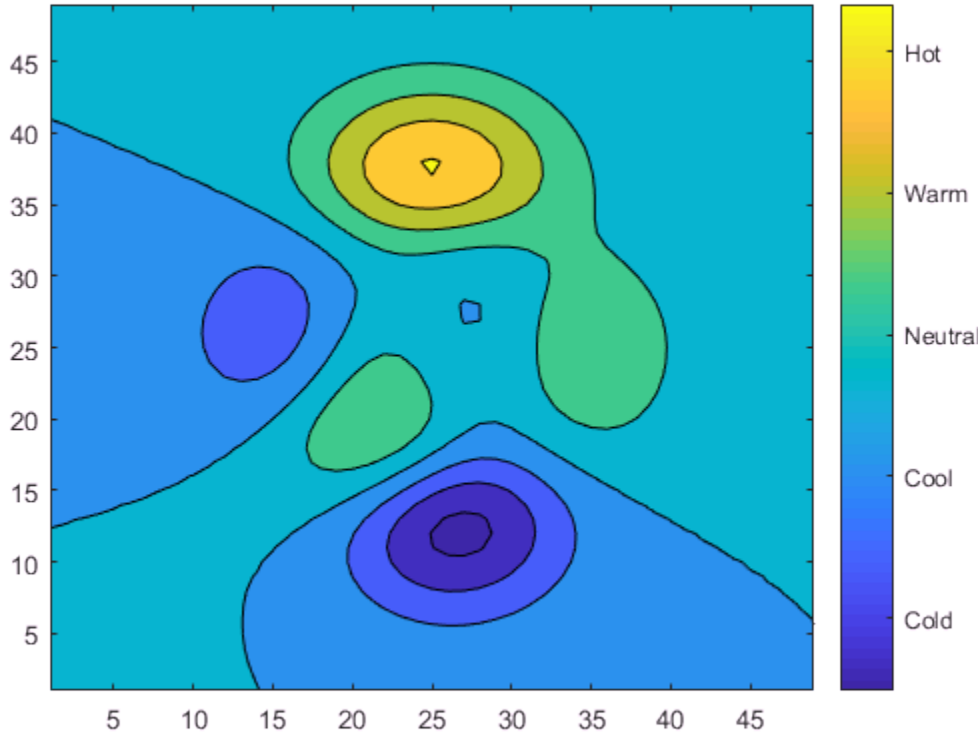

Label Colorbar

Add a text label along a colorbar. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
surf(peaks)
c = colorbar;
c.Label.String = 'Elevation (ft in 1000s)';
```

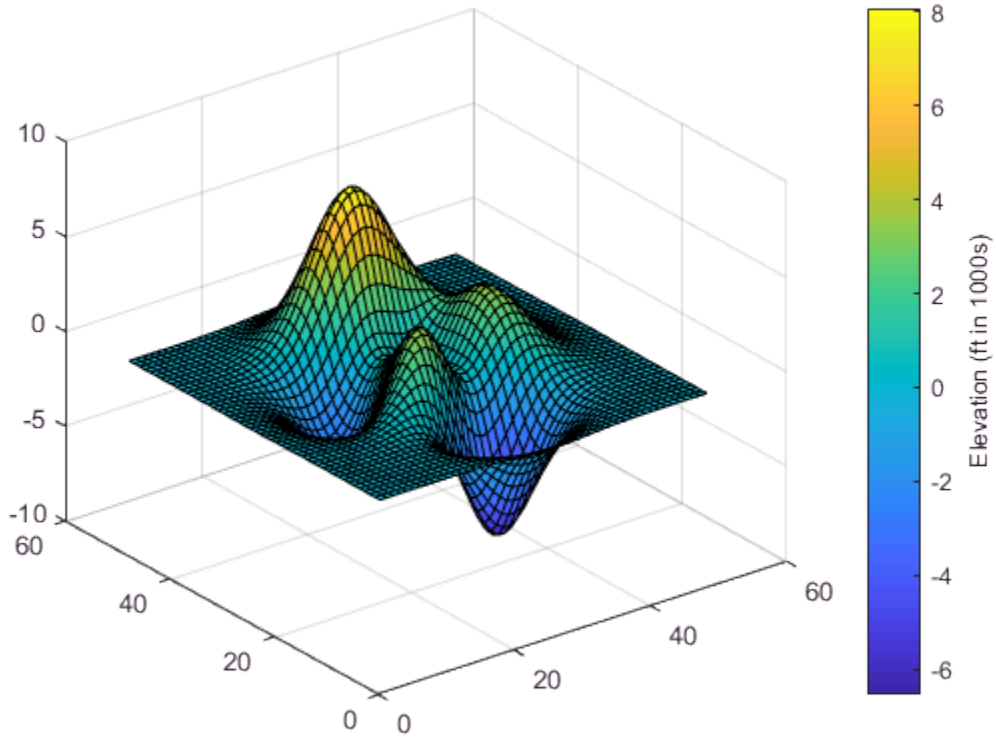

Delete Colorbar

Add a colorbar to a surface plot.

```
figure
surf(peaks)
colorbar
```

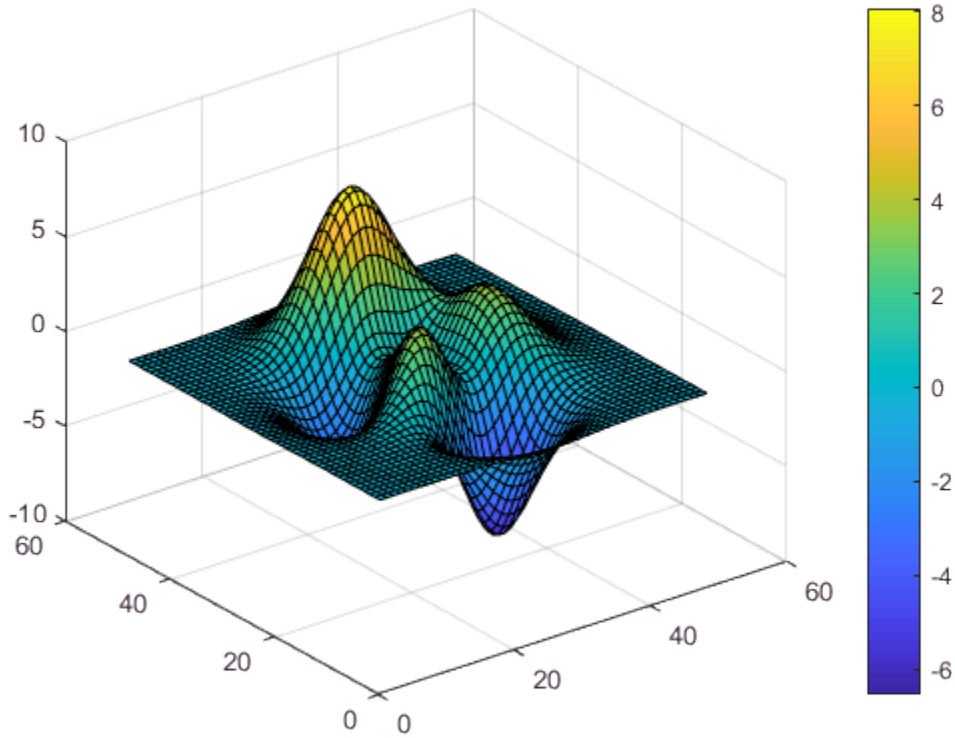

Delete the colorbar from the surface plot.

```
colorbar('off')
```

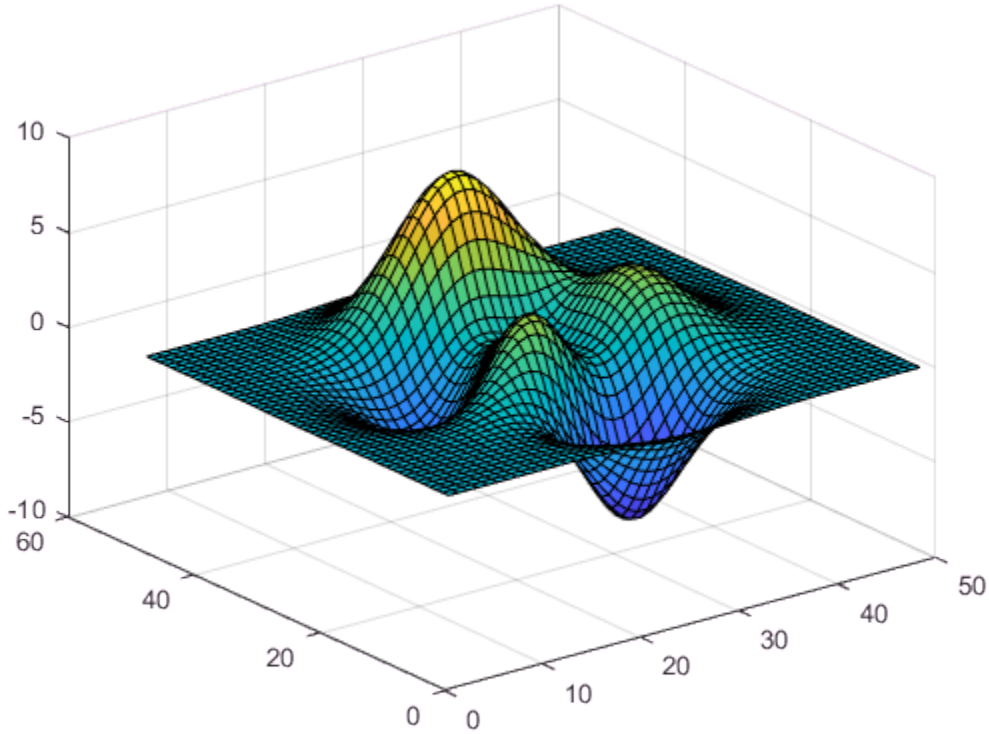

- "Creating Colorbars"
- "Control Colormap Limits"

Input Arguments

`loc` — Colorbar location and orientation

`'eastoutside'` (default) | `'north'` | `'south'` | `'east'` | `'west'` | `'northoutside'` | ...

Colorbar location and orientation with respect to the axes, specified as one of the values in this table.

Value	Resulting Location	Resulting Orientation
`'north'`	Top of axes	Horizontal
`'south'`	Bottom of axes	Horizontal
`'east'`	Right side of axes	Vertical
`'west'`	Left side of axes	Vertical
`'northoutside'`	Top outside of axes	Horizontal
`'southoutside'`	Bottom outside of axes	Horizontal
`'eastoutside'`	Right outside of axes (default)	Vertical
`'westoutside'`	Left outside of axes	Vertical

If a colorbar already exists in the specified location, then an updated colorbar replaces the existing one. To ensure that the colorbar does not overlap the graph, specify a location with the suffix, `outside`.

You also can set the colorbar location using its `Location` property. For example, `colorbar('Location','northoutside')` is the same as `colorbar('northoutside')`. If you use the shorthand syntax, `colorbar('northoutside')`, then MATLAB sets the colorbar `Location` property value to `'northoutside'`.

Example: `colorbar('westoutside')`

`target` — Target for colorbar

`Axes` object | `PolarAxes` object | graphics object

Target for the colorbar, specified as an `Axes` object, a `PolarAxes` object, or a graphics object that has a `ColorbarVisible` property. For example, you can add or remove a colorbar from a `HeatmapChart` object.

If you do not specify the target for the colorbar, then the `colorbar` function affects the graphics object returned by the `gca` command.

Note: Some charts do not support modifying the colorbar appearance, such as the location, or returning the `Colorbar` object as an output argument.

Name-Value Pair Arguments

The colorbar properties listed here are only a subset. For a complete list see Colorbar Properties.

Example: `colorbar('FontSize',12,'Direction','reverse')` sets the font size of the colorbar to 12 points and reverses the orientation of the colorbar.

`'Location'` — Location with respect to the axes

`'eastoutside'` (default) | `'north'` | `'south'` | `'east'` | `'west'` | `'northoutside'` | `...`

Location with respect to the axes, specified as one of the values listed in this table.

Value	Resulting Location	Resulting Orientation
`'north'`	Top of axes	Horizontal
`'south'`	Bottom of axes	Horizontal
`'east'`	Right side of axes	Vertical
`'west'`	Left side of axes	Vertical
`'northoutside'`	Top outside of axes	Horizontal
`'southoutside'`	Bottom outside of axes	Horizontal
`'eastoutside'`	Right outside of axes (default)	Vertical
`'westoutside'`	Left outside of axes	Vertical
`'manual'`	Determined by `Position` property	Vertical

To display the colorbar in a location that does not appear in the table, use the `Position` property to specify a custom location. If you set the `Position` property, then MATLAB sets the `Location` property to `'manual'`. The associated axes does not resize to accommodate the colorbar when the `Location` property is set to `'manual'`.

`'TickLabels'` — Tick mark labels

cell array of character vectors | numeric array | character vector

Tick mark labels, specified as a cell array of character vectors, a numeric array, or a character vector. By default, the colorbar labels the tick marks with numeric values. If

you specify labels and do not specify enough labels for all the tick marks, then MATLAB cycles through the labels.

Example: `{'cold','warm','hot'}`

`'TickLabelInterpreter'` — Interpretation of characters in tick labels
`'tex'` (default) | `'latex'` | `'none'`

Interpretation of tick label characters, specified as one of these values:

- `'tex'` — Interpret labels using a subset of the TeX markup.
- `'latex'` — Interpret labels using a subset of LaTeX markup.
- `'none'` — Display literal characters

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the text type and color, and include special characters in the labels.

This table lists the supported modifiers when the `TickLabelInterpreter` property is set to `'tex'`, which is the default value. Modifiers remain in effect until the end of the text, except for superscripts and subscripts which only modify the next character or the text within the curly braces `{}`.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (rarely available)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Set `specifier` as the name of a font family to change	`'\fontname{Courier} text'`

Modifier	Description	Example
	the font style. You can use this in combination with other modifiers.	
`\fontsize{specifier}`	Set `specifier` as a scalar numeric value to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Set `specifier` as a three-element RGB triplet to change the font color.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\iota	ι	\Sigma	Σ	\rightarrow	→
\kappa	κ	\Upsilon	ϒ	\Rightarrow	⇒
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `TickLabelInterpreter` property to `'latex'`. The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and

`FontAngle` properties do not have an effect. To change the font style, use LaTeX markup within the text.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project Web site at http://www.latex-project.org/.

`'Ticks'` — Tick mark locations

vector of monotonically increasing numeric values

Tick mark locations, specified as a vector of monotonically increasing numeric values. The values do not need to be equally spaced. If you do not want tick marks displayed, then set the property to the empty vector, `[]`.

Example: `[-1,0,1,2,3,4,5]`

Data Types: `single` | `double`

`'Direction'` — Direction of color scale

`'normal'` (default) | `'reverse'`

Direction of color scale, specified as one of these values:

- `'normal'` — Display the colormap and labels ascending from bottom to top for a vertical colorbar, and ascending from left to right for a horizontal colorbar. This is the default value.
- `'reverse'` — Display the colormap and labels descending from bottom to top for a vertical colorbar, and descending from left to right for a horizontal colorbar.

`'FontSize'` — Font size

9 (default) | scalar value greater than zero

Font size, specified as a scalar value greater than zero in point units. If you change the axes font size, then MATLAB automatically sets the font size of the `colorbar` object to 90% of the axes font size. If you manually set the `colorbar` object font size, then changing the axes font size does not affect the `colorbar` object.

Output Arguments

c — Colorbar object
Colorbar object

Colorbar object. Use c to set properties of the colorbar after it is created.

Tips

- To add a text description along the colorbar, access the underlying text object using the Label property of the colorbar.

  ```
  c.Label.String = 'My Colorbar Label';
  ```

  To change the label appearance, such as the font style or color, set other text properties. For a list of properties, see Text Properties. For example, this code changes the font size.

  ```
  c.Label.FontSize = 12;
  ```
- Adding a colorbar might resize the axes to accommodate the colorbar.
- If an axes does not exist, then the colorbar function creates a blank axes and displays a colorbar with the default colormap.
- You can use colorbar('delete') or colorbar('hide') instead of colorbar('off') to delete all colorbars in the current axes.

See Also

See Also

Functions
caxis | colormap

Properties
Colorbar Properties

Topics
"Creating Colorbars"

"Control Colormap Limits"

Introduced before R2006a

Colorbar Properties

Control colorbar appearance and behavior

Description

`Colorbar` properties control the appearance and behavior of a `Colorbar` object. By changing property values, you can modify certain aspects of the colorbar. Use dot notation to refer to a particular object and property:

```
c = colorbar;
w = c.LineWidth;
c.LineWidth = 1.5;
```

Appearance

`Color` — Color of tick marks, text, and box outline

`[0 0 0]` (default) | RGB triplet | character vector of color name

Color of the tick marks, text, and box outline, specified as an RGB triplet or a character vector of a color name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`

Long Name	Short Name	RGB Triplet
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0 1 0]

Example: 'green'

Box — Box outline

'on' (default) | 'off'

Box outline, specified as one of these values:

- 'on' — Display the box outline around the colorbar.
- 'off' — Do not display the box outline around the colorbar.

LineWidth — Width of box outline

0.5 (default) | positive value

Width of box outline, specified as a positive value in point units. One point equals 1/72 inches.

Example: 1.5

Label — Label that displays along colorbar

text object (default)

Label that displays along the colorbar, returned as a text object. This text object contains properties that control the label appearance and the text that displays. Use the Label property to access the text object, for example:

```
c = colorbar;
c.Label
```

```
ans =

  Text with properties:

                String: ''
              FontSize: 10
            FontWeight: 'normal'
```

```
               FontName: 'Helvetica'
                  Color: [0.1500 0.1500 0.1500]
    HorizontalAlignment: 'left'
               Position: [0 0 0]
                  Units: 'data'

  Show all properties
```

By default, there is no text displayed. To display text or change existing text, set the `String` property for the text object, for example:

```
c.Label.String = 'Label Text Goes Here';
```

To change the label appearance, such as the font style or color, set other text properties. For example, this code changes the font size.

```
c.Label.FontSize = 12;
```

For a full list of options, see Text Properties.

Location and Size

`Location` — Location with respect to the axes

`'eastoutside'` (default) | `'north'` | `'south'` | `'east'` | `'west'` | `'northoutside'` | `...`

Location with respect to the axes, specified as one of the values listed in this table.

Value	Resulting Location	Resulting Orientation
`'north'`	Top of axes	Horizontal
`'south'`	Bottom of axes	Horizontal
`'east'`	Right side of axes	Vertical
`'west'`	Left side of axes	Vertical
`'northoutside'`	Top outside of axes	Horizontal
`'southoutside'`	Bottom outside of axes	Horizontal
`'eastoutside'`	Right outside of axes (default)	Vertical

Value	Resulting Location	Resulting Orientation
`'westoutside'`	Left outside of axes	Vertical
`'manual'`	Determined by `Position` property	Vertical

To display the colorbar in a location that does not appear in the table, use the `Position` property to specify a custom location. If you set the `Position` property, then MATLAB sets the `Location` property to `'manual'`. The associated axes does not resize to accommodate the colorbar when the `Location` property is set to `'manual'`.

`Position` — Custom location and size
four-element vector

Custom location and size, specified as a four-element vector of the form `[left, bottom, width, height]`. The `left` and `bottom` elements specify the distance from the lower-left corner of the figure or to the lower-left corner of the colorbar. The `width` and `height` elements specify the dimensions of the colorbar. The `Units` property determines the position units.

If you specify the `Position` property, then MATLAB changes the `Location` property to `'manual'`. The associated axes does not resize to accommodate the colorbar when the `Location` property is `'manual'`.

Example: `[0.1 0.1 0.3 0.7]`

`Units` — Position units
`'normalized'` (default) | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

`Units`	Description
`'normalized'` (default)	Normalized with respect to the container, which is usually the figure. The lower left corner of the figure maps to `(0,0)` and the upper right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.

Units	Description
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units are measured from the lower-left corner of the container window.

This property affects the `Position` property. If you change the units, then it is good practice to return it to its default value after completing your computation to prevent affecting other functions that assume `Units` is the default value.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the object, then the order of specification matters. If you want to define the position with particular units, then you must set the `Units` property before the `Position` property.

Tick Marks and Tick Labels

`Ticks` — Tick mark locations

vector of monotonically increasing numeric values

Tick mark locations, specified as a vector of monotonically increasing numeric values. The values do not need to be equally spaced. If you do not want tick marks displayed, then set the property to the empty vector, `[]`.

Example: `[-1,0,1,2,3,4,5]`

Data Types: `single` | `double`

`TicksMode` — Selection mode for `Ticks`

`'auto'` (default) | `'manual'`

Selection mode for `Ticks`, specified as one of these values:

- `'auto'` — Automatically choose the values.
- `'manual'` — Use manually specified values. To specify the values, set the `Ticks` property.

`TickLabels` — Tick mark labels

cell array of character vectors | string array | numeric array | character vector

Tick mark labels, specified as a cell array of character vectors, a string array, a numeric array, or a character vector. By default, the colorbar labels the tick marks with numeric values. If you specify labels and do not specify enough labels for all the tick marks, then MATLAB cycles through the labels.

Example: `{'cold','warm','hot'}`

`TickLabelsMode` — Selection mode for `TickLabels`

`'auto'` (default) | `'manual'`

Selection mode for `TickLabels`, specified as one of these values:

- `'auto'` — Automatically choose the tick mark labels.
- `'manual'` — Use manually specified values. To specify the values, set the `TickLabels` property.

`TickLabelInterpreter` — Interpretation of characters in tick labels

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of tick label characters, specified as one of these values:

- `'tex'` — Interpret labels using a subset of the TeX markup.
- `'latex'` — Interpret labels using a subset of LaTeX markup.
- `'none'` — Display literal characters

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the text type and color, and include special characters in the labels.

This table lists the supported modifiers when the `TickLabelInterpreter` property is set to `'tex'`, which is the default value. Modifiers remain in effect until the end of the text, except for superscripts and subscripts which only modify the next character or the text within the curly braces `{}`.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (rarely available)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Set `specifier` as the name of a font family to change the font style. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Set `specifier` as a scalar numeric value to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Set `specifier` as a three-element RGB triplet to change the font color.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\alpha	α	\upsilon	υ	\sim	~
\angle	∠	\phi	ϕ	\leq	≤
\ast	*	\chi	χ	\infty	∞
\beta	β	\psi	ψ	\clubsuit	♣
\gamma	γ	\omega	ω	\diamondsuit	♦
\delta	δ	\Gamma	Γ	\heartsuit	♥
\epsilon	ε	\Delta	Δ	\spadesuit	♠
\zeta	ζ	\Theta	Θ	\leftrightarrow	↔
\eta	η	\Lambda	Λ	\leftarrow	←
\theta	θ	\Xi	Ξ	\Leftarrow	⇐
\vartheta	ϑ	\Pi	Π	\uparrow	↑
\iota	ι	\Sigma	Σ	\rightarrow	→
\kappa	κ	\Upsilon	ϒ	\Rightarrow	⇒
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `TickLabelInterpreter` property to `'latex'`. The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup within the text.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project Web site at http://www.latex-project.org/.

`Direction` — Direction of color scale

`'normal'` (default) | `'reverse'`

Direction of color scale, specified as one of these values:

- `'normal'` — Display the colormap and labels ascending from bottom to top for a vertical colorbar, and ascending from left to right for a horizontal colorbar. This is the default value.
- `'reverse'` — Display the colormap and labels descending from bottom to top for a vertical colorbar, and descending from left to right for a horizontal colorbar.

`AxisLocation` — Location of tick marks, tick labels, and colorbar label

`'out'` (default) | `'in'`

Location of tick marks, tick labels, and colorbar label, specified as one of these values:

- `'out'` — Display the tick marks and labels on the side of the colorbar towards the outside of the figure. This is the default value.
- `'in'` — Display the tick marks and labels on the side of the colorbar towards the inside of the figure.

`AxisLocationMode` — Selection mode for `AxisLocation`

`'auto'` (default) | `'manual'`

Selection mode for `AxisLocation`, specified as one of these values:

- `'auto'` — Automatically choose the location.
- `'manual'` — Use a manually specified location. To specify the location, set the `AxisLocation` property.

`TickDirection` — Tick mark direction

`'in'` (default) | `'out'`

Tick mark direction, specified as one of these values:

- `'in'` — Display the tick marks facing inward from the colorbar box.
- `'out'` — Display the tick marks facing outward from the colorbar box.

`TickLength` — Tick mark length

`0.01` (default) | scalar

Tick mark length, specified as a scalar. Specify the tick length in units normalized to the length of the colorbar axis.

Example: `0.05`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Limits` — Minimum and maximum tick mark values

two-element vector

The minimum and maximum tick mark values, specified as a two-element vector. The second vector element must be greater than the first element.

Example: `[0 1]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`LimitsMode` — Selection mode for limits

`'auto'` (default) | `'manual'`

Selection mode for limits, specified as one of these values:

- `'auto'` — Automatically chooses the limits.
- `'manual'` — Use manually specified limits. To specify the limits, set the `Limits` property.

Font Style

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font might look the same as the normal font.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

`FontName` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`FontSize` — Font size

9 (default) | scalar value greater than zero

Font size, specified as a scalar value greater than zero in point units. If you change the axes font size, then MATLAB automatically sets the font size of the `Colorbar` object to 90% of the axes font size. If you manually set the `Colorbar` object font size, then changing the axes font size does not affect the `Colorbar` object.

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

Identifiers

`Type` — Type of graphics object

`'colorbar'`

This property is read-only.

Type of graphics object, returned as `'colorbar'`. Use this property to find all objects of a given type within a plotting hierarchy, such as searching for the type using `findobj`.

`Tag` — Tag to associate with colorbar

`'colorbar'` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Parent/Child

`Parent` — Parent

figure object | uipanel object | uitab object

Parent, specified as a figure object, uipanel object, or a uitab object.

The `Colorbar` object must have the same parent as the associated axes. If you change the parent of the associated axes, then the `Colorbar` object automatically updates to use the same parent.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the `Colorbar` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Colorbar` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Colorbar` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Colorbar` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Colorbar` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Colorbar` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'off'` (default) | `'on'`

Callback interruption, specified as `'off'` or `'on'`. The `Interruptible` property determines if a running callback can be interrupted.

If the `ButtonDownFcn` callback of the colorbar is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'off'` — The running callback cannot be interrupted. MATLAB finishes executing the running callback without any interruptions. This is the default behavior.

- `'on'` — The running callback can be interrupted. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

Example: `'off'`

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the

BusyAction property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the ButtonDownFcn callback of the Colorbar object tries to interrupt a running callback that cannot be interrupted, then the BusyAction property determines if it is discarded or put in the queue. Specify the BusyAction property as one of these values:

- 'queue' — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- 'cancel' — Discard the interrupting callback.

Creation and Deletion Control

CreateFcn — Creation callback

'' (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the CreateFcn property on an existing object has no effect. You must define a default value for this property, or define this property using a Name,Value pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the CallbackObject property of the root, which can be queried using the gcbo function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see “Callback Definition”.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`colorbar`

Topics

"Access Property Values"
"Graphics Object Properties"

colorcube

Colorcube colormap array

Syntax

```
c = colorcube
c = colorcube(m)
```

Description

`c = colorcube` returns the colorcube colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = colorcube(m)` returns the colormap with `m` colors.

Examples

Use a Section of the Colormap

After getting the colormap array, you can isolate a section of it to use as the color scheme.

Create a surface plot of a plane.

```
[X,Y] = meshgrid(-10:1:10);
Z = X + Y;
surf(X,Y,Z);
```

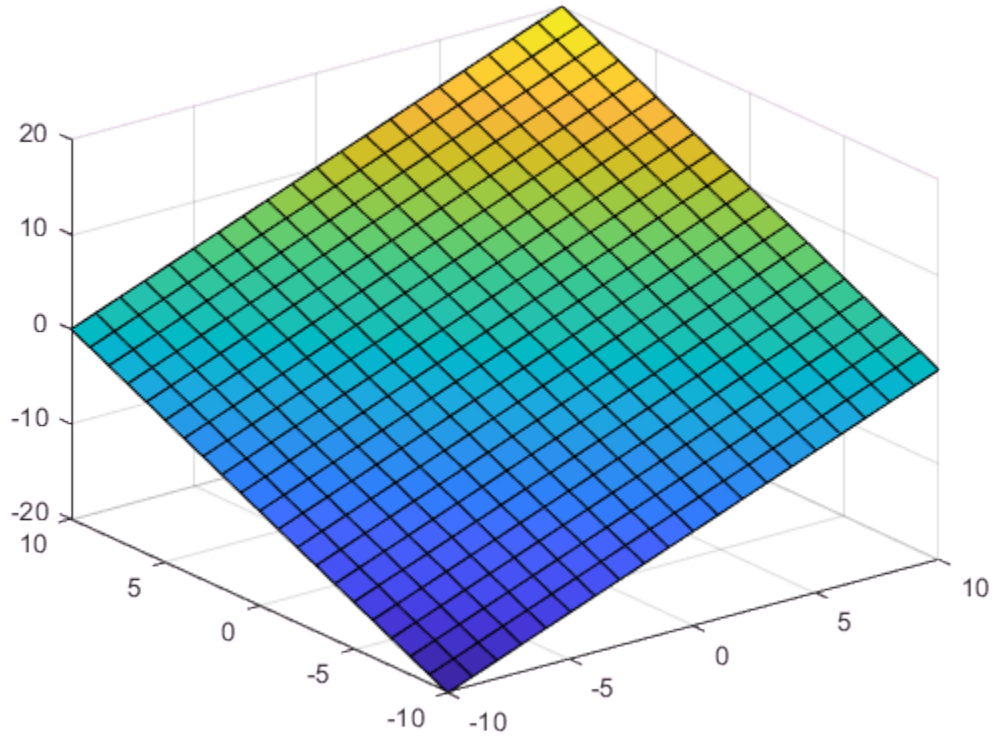

Get the colorcube colormap array, and isolate the red section (entries 39 to 44). Then use this section to color the whole surface.

```
c = colorcube;
c = c(39:44,:);
colormap(c);
```

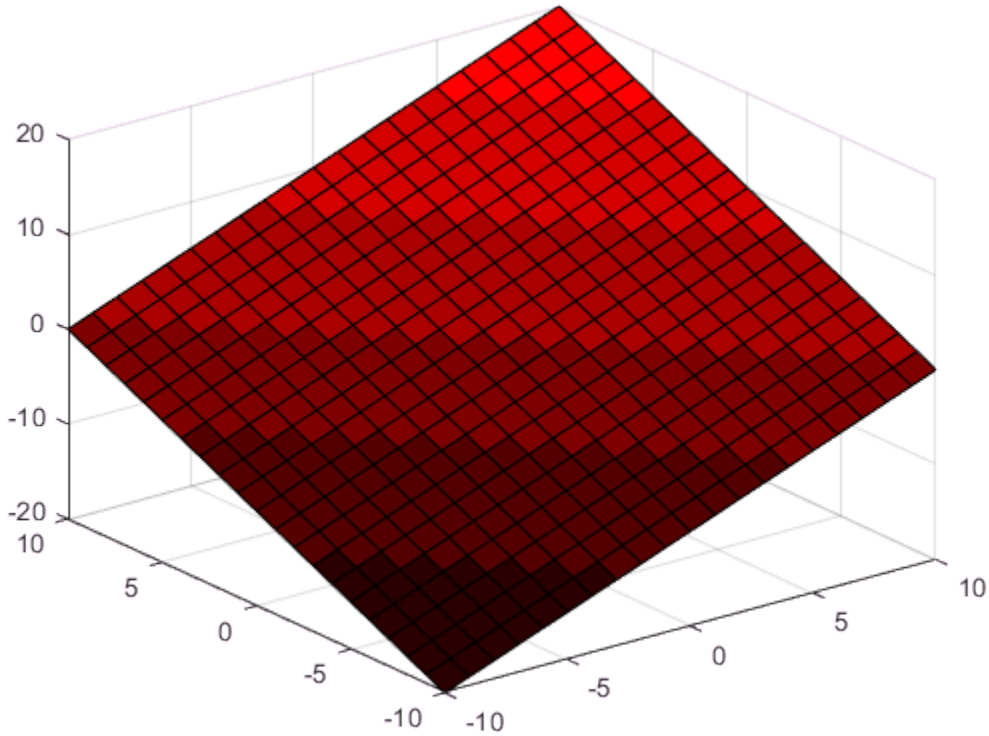

Color a Plane with the Colorcube Colormap

Create a surface plot of a plane.

```
[X,Y] = meshgrid(-10:1:10);
Z = X + Y;
surf(X,Y,Z);
```

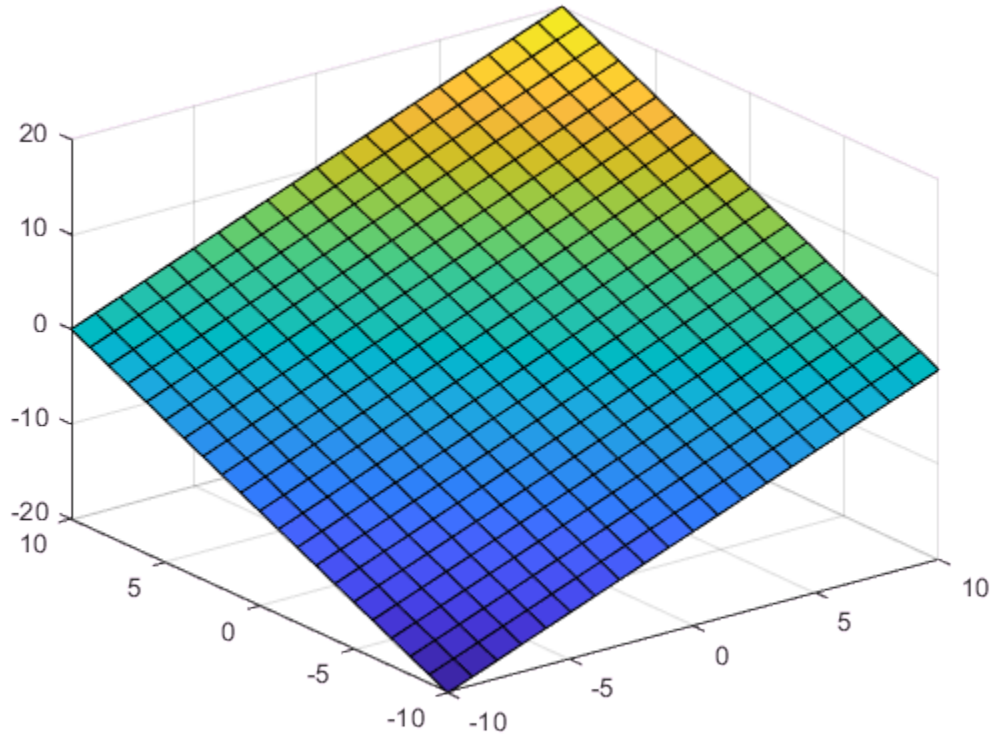

Get the colorcube colormap with 75 entries. Then use it to color the plane.

```
c = colorcube(75);
colormap(c);
```

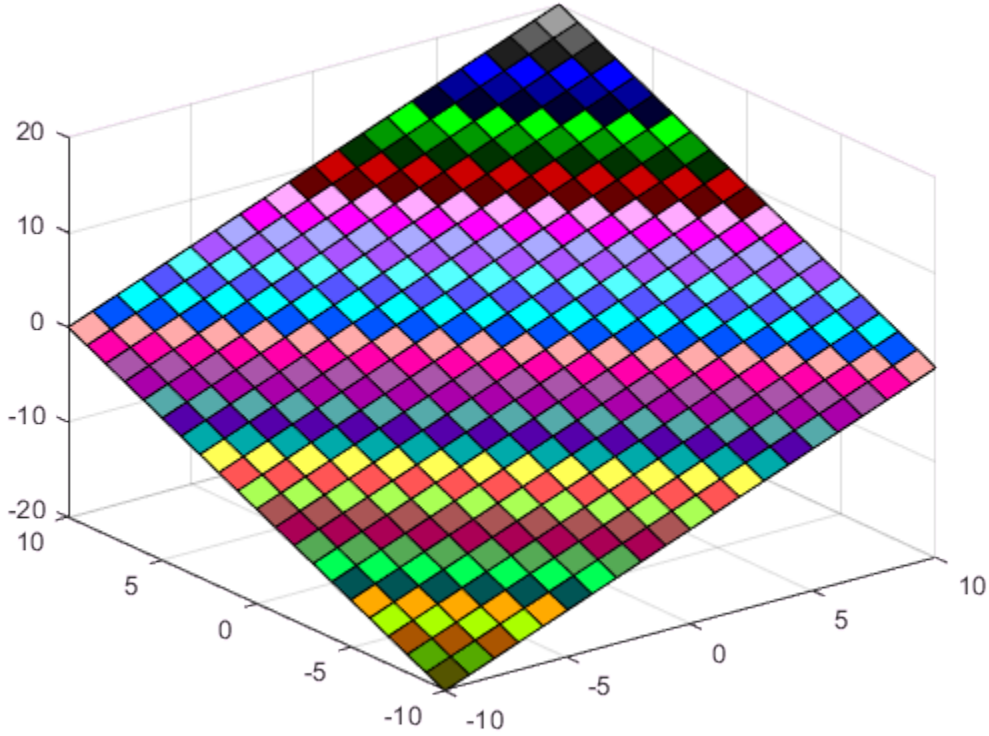

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

colordef

Set default property values to display different color schemes

Compatibility

`colordef` is not recommended.

Syntax

```
colordef white
colordef black
colordef none
colordef(fig,color_option)
h = colordef('new',color_option)
```

Description

`colordef` enables you to select either a white or black background for graphics display. It sets axis lines and labels so that they contrast with the background color.

`colordef white` sets the axis background, axis lines and labels, and the figure background to the default system colors.

`colordef black` sets the axis background color to black, the axis lines and labels to white, and the figure background color to dark gray.

`colordef none` sets the figure coloring to that used by MATLAB Version 4. The most noticeable difference is that the axis background is set to `'none'`, making the axis background and figure background colors the same. The figure background color is set to black.

`colordef(fig,color_option)` sets the color scheme of the figure identified by the handle `fig` to one of the color options `'white'`, `'black'`, or `'none'`. When you use this syntax to apply `colordef` to an existing figure, the figure must have no graphic content. If it does, you should first clear it (via `clf`) before using this form of the command.

`h = colordef('new',color_option)` returns the handle to a new figure created with the specified color options (i.e., `'white'`, `'black'`, or `'none'`). This form of the command is useful for creating GUIs when you may want to control the default environment. The figure is created with `'visible','off'` to prevent flashing.

Tips

`colordef` affects only subsequently drawn figures, not those currently on the display. This is because `colordef` works by setting default property values (on the root or figure level). You can list the currently set default values on the root level with the statement

```
get(groot,'Default')
```

You can remove all default values using the `reset` command:

```
reset(groot)
```

See the `get` and `reset` references pages for more information.

See Also

`whitebg` | `clf`

Introduced before R2006a

colormap

View and set current colormap

Syntax

```
colormap name
colormap(map)
colormap(target,map)

colormap default
colormap(target,'default')

cmap = colormap
cmap = colormap(target)
```

Description

`colormap name` sets the colormap for the current figure to the built-in colormap specified by `name`. The new colormap uses the same number of colors as the current colormap. The figure colormap affects all axes in the figure, unless you set an axes colormap separately. For more information, see "What Is a Colormap?" on page 1-1553.

`colormap(map)` sets the colormap for the current figure to the colormap specified by `map`. Use this syntax if you want to use a built-in colormap with a specific number of colors or if you want to use a custom colormap.

- For a built-in colormap with a specific number of colors, specify `map` as one of the built-in colormap functions and pass it an integer value as an input argument. For example, `colormap(summer(10))` uses 10 colors from the `summer` colormap. If you do not specify the number of colors, such as `colormap(summer)`, then the colormap contains the same number of colors as the current colormap.
- For a custom colormap, specify `map` as a three-column matrix of values in the range `[0,1]` where each row is an RGB triplet that defines one color of the colormap. An RGB triplet is a three-element row vector specifying the red, green, and blue intensities for a color.

`colormap(target,map)` sets the colormap for the figure, axes, or chart specified by `target`, instead of for the current figure.

`colormap default` sets the figure colormap to the default colormap, which is the `parula` colormap with 64 colors. Versions of MATLAB prior to R2014b use `jet` as the default.

`colormap(target,'default')` sets the colormap for the figure or axes specified by `target` to the default figure colormap.

`cmap = colormap` returns the three-column matrix of RGB triplets defining the colormap for the current figure.

`cmap = colormap(target)` returns the colormap for the figure, axes, or chart specified by `target`.

Examples

Change Colormap for Figure

Create a surface plot and set the colormap to `winter`.

```
figure
surf(peaks)
colormap winter
```

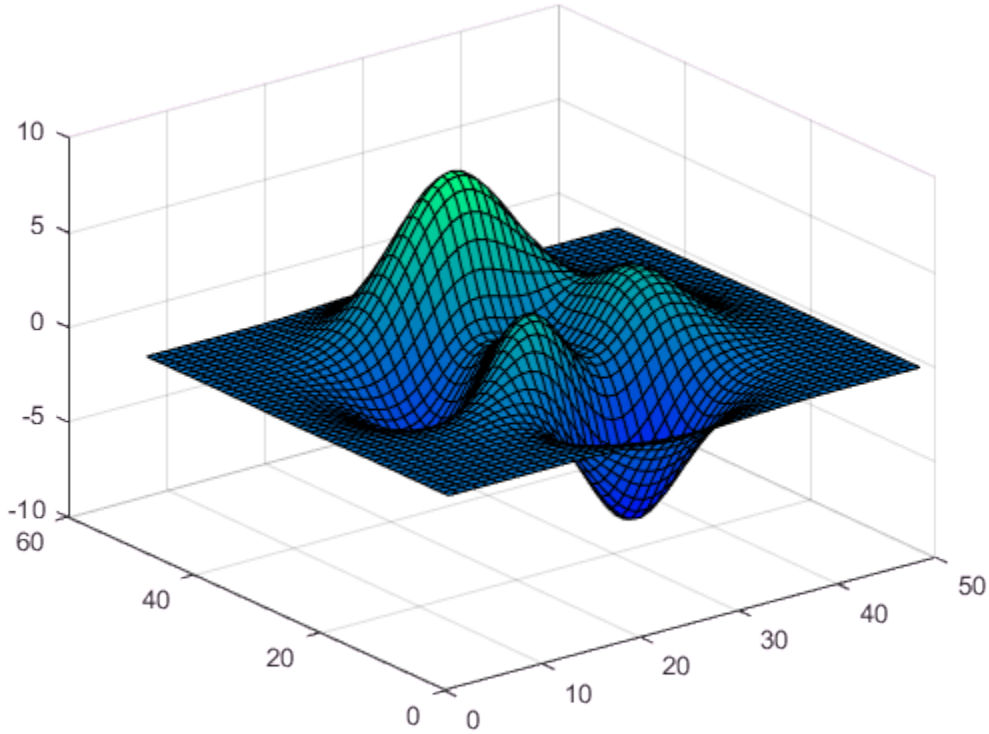

Set Colormap Back to Default

First, change the colormap for the current figure to `summer`.

```
figure
surf(peaks)
colormap summer
```

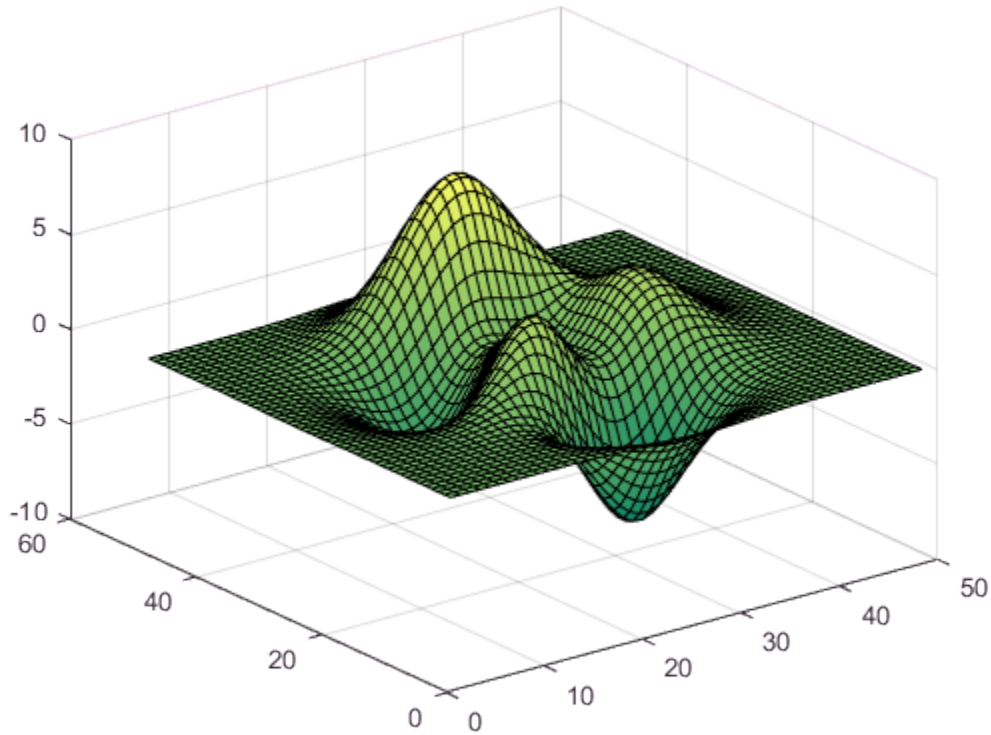

Now set the colormap back to your system's default value. If you have not specified a different default value, then the default colormap is `parula`.

```
colormap default
```

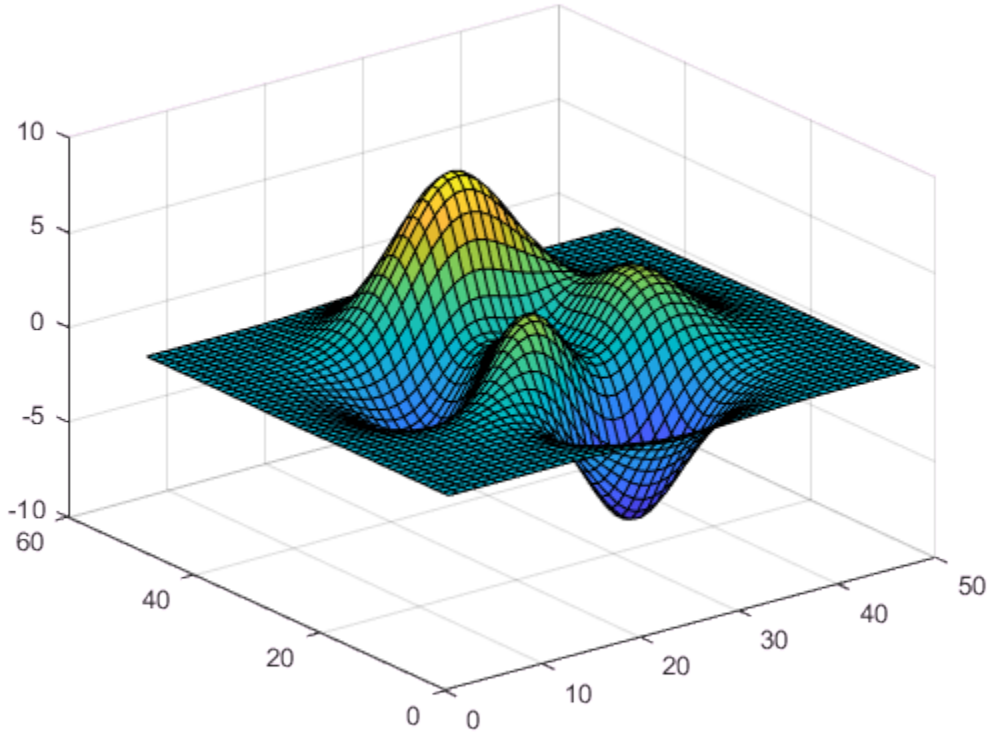

Use Different Colormaps for Each Axes in Figure

Create a figure with two subplots and store the axes handles, `ax1` and `ax2`. Use a different colormap for each axes by passing the axes handles to the `colormap` function. In the upper subplot, create a surface plot using the `spring` colormap. In the lower subplot, create a surface plot using the `winter` colormap.

```
figure
ax1 = subplot(2,1,1);
surf(peaks)
colormap(ax1,spring)
```

```
ax2 = subplot(2,1,2);
surf(peaks)
colormap(ax2,winter)
```

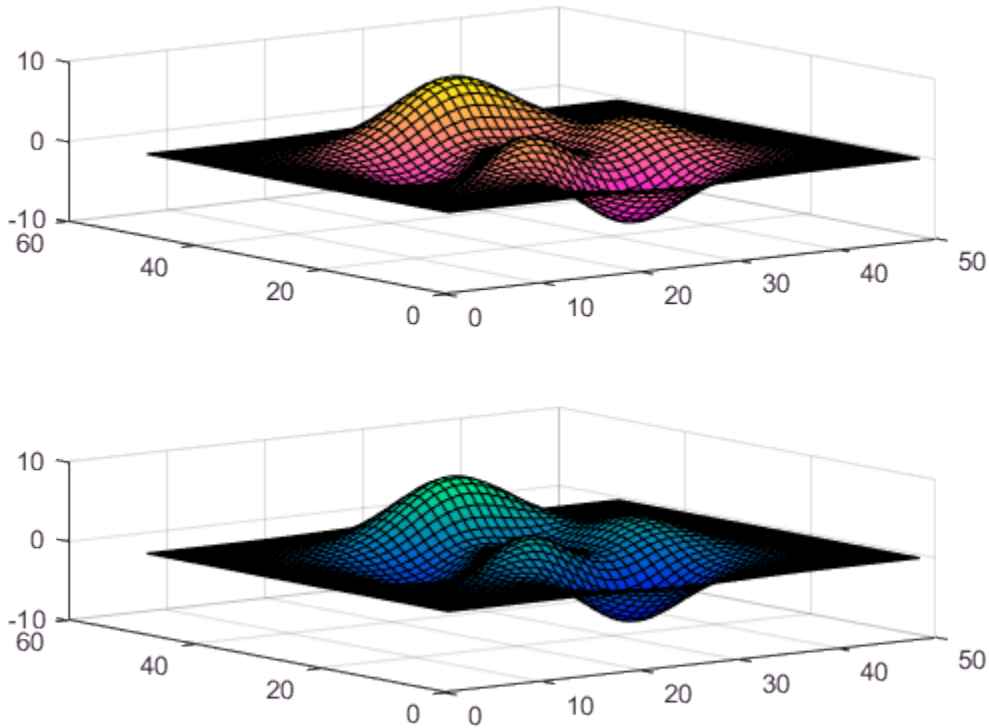

Specify Number of Colors for Colormap

Specify the number of colors used in a colormap by passing an integer as an input argument to the built-in colormap. Use five colors from the parula colormap.

```
figure
mesh(peaks)
colormap(parula(5))
```

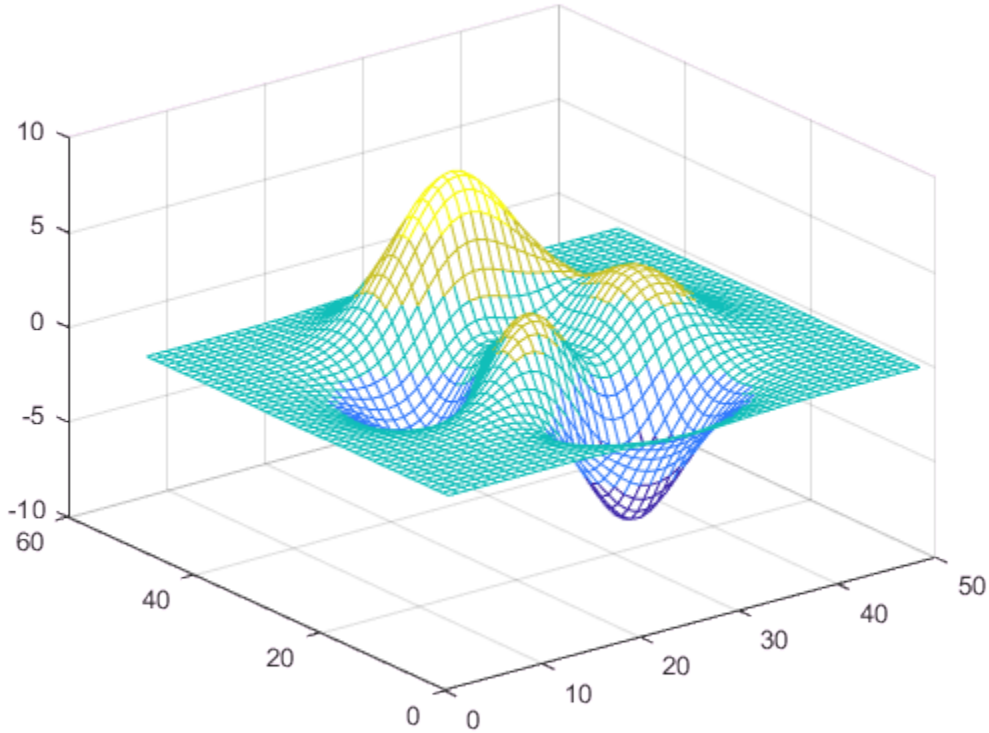

Create Custom Colormap

Create a custom colormap by defining a three-column matrix of values between 0.0 and 1.0. Each row defines a three-element RGB triplet. The first column specifies the red intensities. The second column specifies the green intensities. The third column specifies the blue intensities.

Use a colormap of blue values by setting the first two columns to zeros.

```
map = [0, 0, 0.3
    0, 0, 0.4
    0, 0, 0.5
    0, 0, 0.6
```

```
    0, 0, 0.8
    0, 0, 1.0];

figure
surf(peaks)
colormap(map)
```

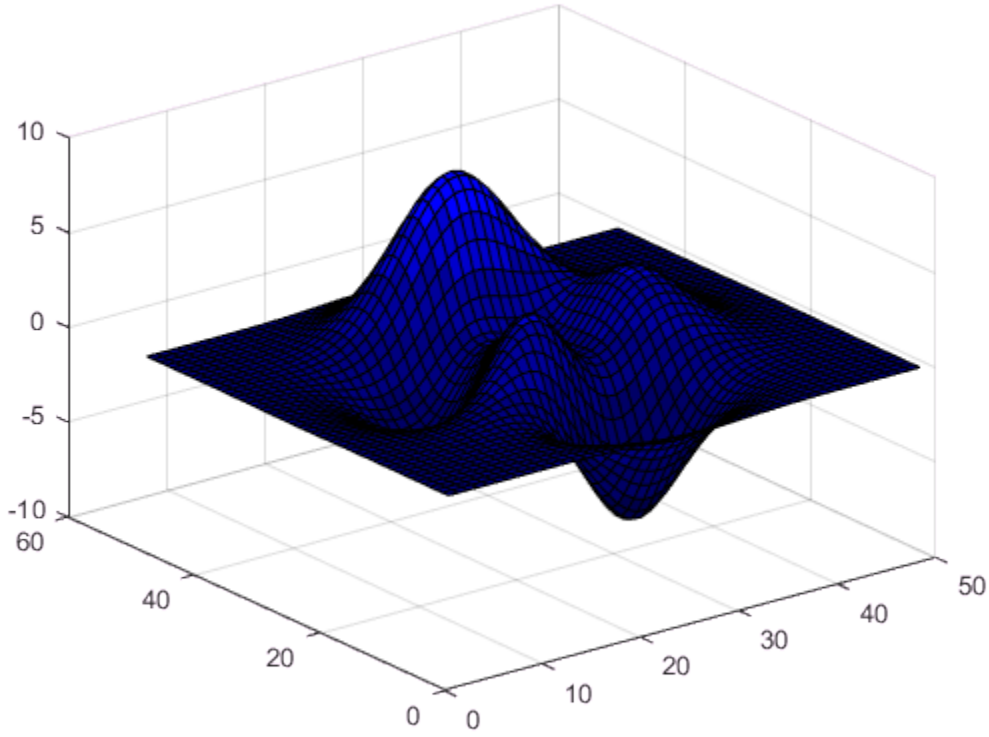

Return Colormap Values Used in Plot

Create a surface plot of the `peaks` function and specify a colormap.

```
figure
mesh(peaks)
colormap(autumn(5))
```

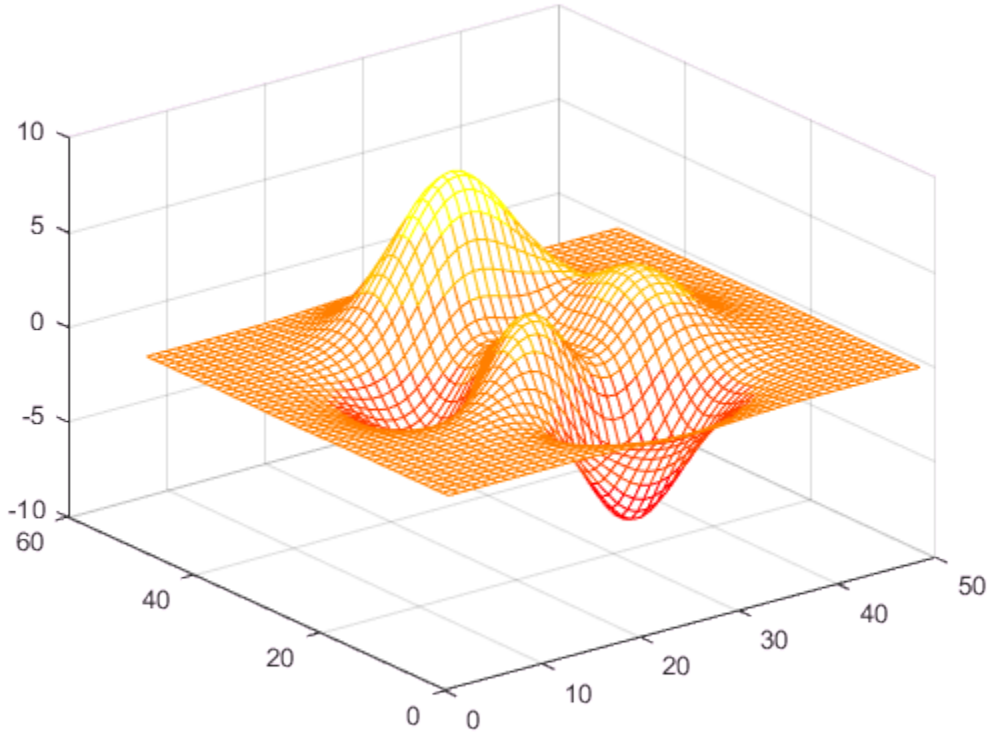

Return the three-column matrix of values that define the colors used in the plot. Each row is an RGB triplet color value that specifies one color of the colormap.

```
cmap = colormap
```

```
cmap =

    1.0000         0         0
    1.0000    0.2500         0
    1.0000    0.5000         0
    1.0000    0.7500         0
    1.0000    1.0000         0
```

Return Colormap Values for Specific Axes

Return the colormap values for a specific axes by passing its axes handle to the `colormap` function.

Create a figure with two subplots and return the axes handles, `ax1` and `ax2`. Add a filled contour plot to each axes and use a different colormap for each axes.

```
figure
ax1 = subplot(2,1,1);
contourf(peaks)
colormap(ax1,hot(8))

ax2 = subplot(2,1,2);
contourf(peaks)
colormap(ax2,pink)
```

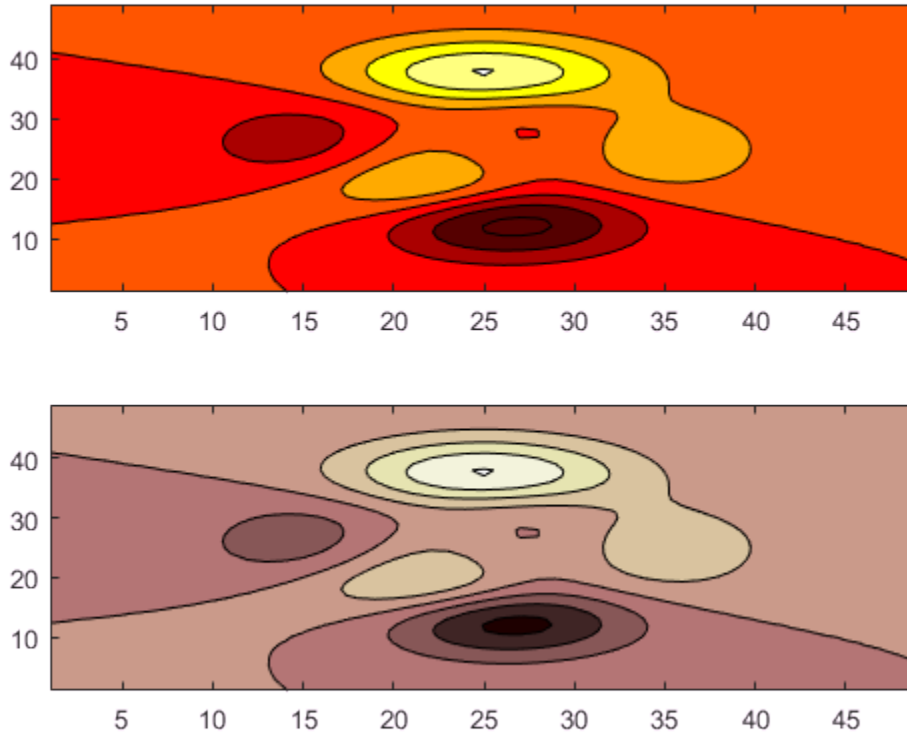

Return the colormap values used in the upper subplot by passing its axes handle, `ax1`, to the `colormap` function. Each row is an RGB triplet color value that specifies one color of the colormap.

```
cmap = colormap(ax1)
```

```
cmap =

    0.3333         0         0
    0.6667         0         0
    1.0000         0         0
    1.0000    0.3333         0
    1.0000    0.6667         0
    1.0000    1.0000         0
```

```
    1.0000    1.0000    0.5000
    1.0000    1.0000    1.0000
```

Change Colormap for Figure with Image

Load the `spine` data set that returns the image `X` and its associated colormap `map`. Display `X` using the `image` function and set the colormap to `map`.

```
load spine
figure
image(X)
colormap(map)
```

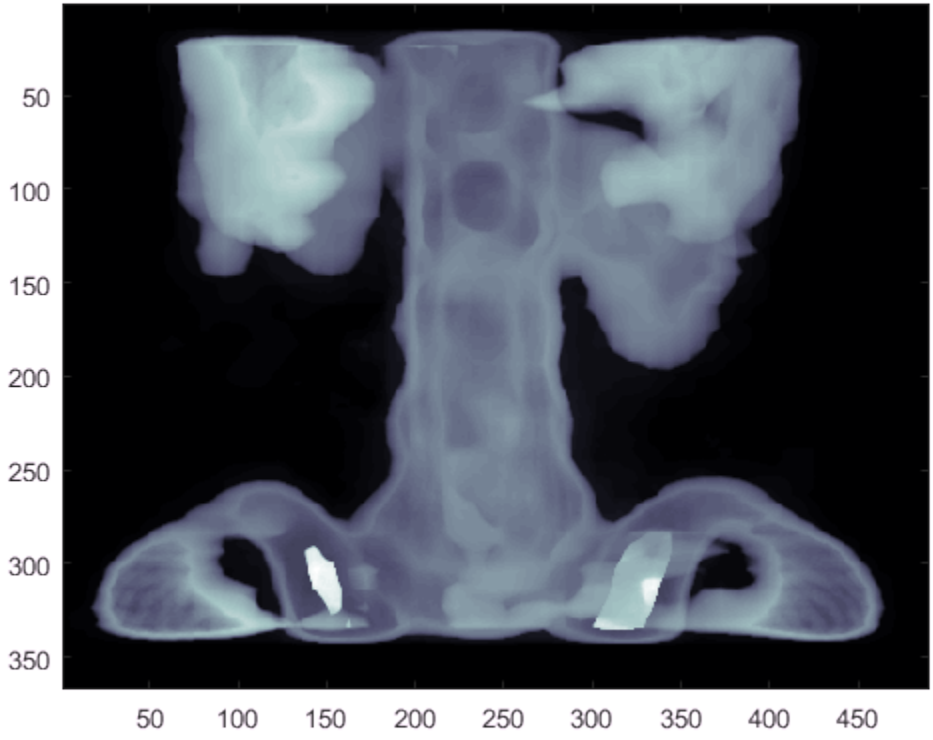

- "Control Colormap Limits"

Input Arguments

name — Built-in colormap

`parula` (default) | built-in colormap

Built-in colormap, specified as a one of the colormaps listed in the table. The default colormap is `parula`. Versions of MATLAB prior to R2014b use `jet` as the default.

The `colormap` function applies the new colormap with the same number of colors as the current colormap. To change the number of colors, use the `map` input argument.

This table lists the built-in colormaps.

Colormap Name	Color Scale
`parula`	
`jet`	
`hsv`	
`hot`	
`cool`	
`spring`	
`summer`	
`autumn`	
`winter`	
`gray`	
`bone`	
`copper`	
`pink`	
`lines`	

Colormap Name	Color Scale
colorcube	
prism	
flag	
white	

map — Built-in or custom colormap

parula (default) | built-in colormap function | three-column matrix of RGB triplets

Built-in or custom colormap, specified as one of the built-in colormap functions or a three-column matrix of RGB triplets. The default colormap is parula. Versions of MATLAB prior to R2014b use jet as the default.

Built-In Colormap Functions

To use a built-in colormap with a specific number of colors, specify map as one of the built-in colormaps functions and pass it an integer value as an input argument. For example, colormap(parula(12)) uses a map with 12 colors from the parula colormap. If you do not specify the number of colors, such as colormap(parula), then MATLAB uses the same number of colors as the current colormap.

Note: Both the name and the map input arguments provide the same built-in colormap options. However, if you use the input argument name, then the colormap function processes name as a character vector and you cannot control the number of colors. If you use the input argument map, then the colormap function processes map as a function, which means that you can pass the built-in colormap an integer value to control the number of colors.

This table lists the built-in colormaps functions.

Colormap Name	Color Scale
parula	
jet	

Colormap Name	Color Scale
hsv	
hot	
cool	
spring	
summer	
autumn	
winter	
gray	
bone	
copper	
pink	
lines	
colorcube	
prism	
flag	
white	

Custom Colormap

To create a custom colormap, specify `map` as a three-column matrix of RGB triplets where each row defines one color. An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`. For example, this matrix defines a colormap containing five colors.

```
map = [0.2, 0.1, 0.5
    0.1, 0.5, 0.8
    0.2, 0.7, 0.6
```

```
0.8, 0.7, 0.3
0.9, 1, 0];
```

This table lists the RGB triplet values for common colors.

Color	RGB Triplet
yellow	`[1,1,0]`
magenta	`[1,0,1]`
cyan	`[0,1,1]`
red	`[1,0,0]`
green	`[0,1,0]`
blue	`[0,0,1]`
white	`[1,1,1]`
black	`[0,0,0]`

`target` — Target
`Figure` object | `Axes` object | graphics object

Target, specified as one of these values:

- `Figure` object. The figure colormap affects plots for all axes within the figure, unless you specify the axes colormap separately.
- `Axes` object. You can define a unique colormap for each `Axes` object. If you set the colormap for the axes, then changing the figure colormap does not affect the axes.
- Graphics object that has a `Colormap` property. For example, you can change or query the colormap for a `HeatmapChart` object.

Output Arguments

`cmap` — Colormap values
three-column matrix of RGB triplets

Colormap values, returned as a three-column matrix of RGB triplets. Each row of the matrix defines one RGB triplet that specifies one color of the colormap. The values are in the range `[0,1]`.

Definitions

What Is a Colormap?

A colormap is matrix of values between `0` and `1` that define the colors for graphics objects such as surface, image, and patch objects. MATLAB draws the objects by mapping data values to colors in the colormap.

Colormaps can be any length, but must be three columns wide. Each row in the matrix defines one color using an RGB triplet. An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`. A value of `0` indicates no color and a value of `1` indicates full intensity. For example, this is a colormap with five colors: black, red, green, blue, and white.

```
mymap = [0 0 0
    1 0 0
    0 1 0
    0 0 1
    1 1 1];
```

Colormaps are associated with axes and figures. Use the `colormap` function to change the colormap for a particular axes or figure. For example, create a surface plot and use `mymap` as the colormap for the figure.

```
surf(peaks)
colormap(mymap)
```

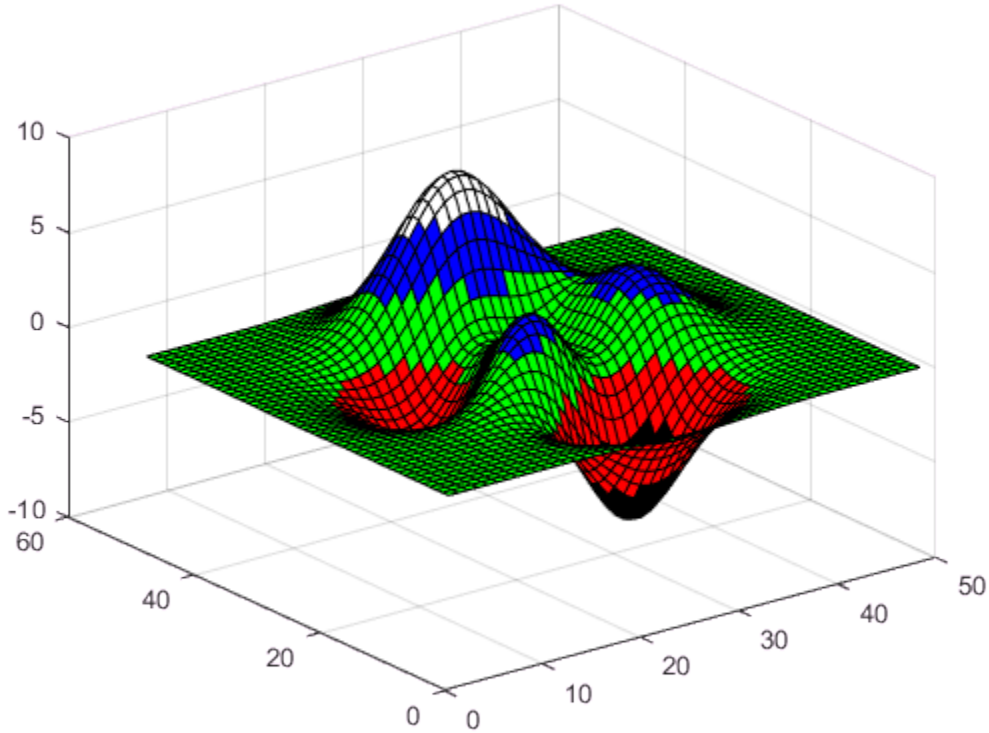

Tips

- To control the mapping of data values into the colormap, use the `caxis` function.

See Also

See Also

`brighten` | `caxis` | `colorbar` | `contrast` | `hsv2rgb` | `imwrite` | `ind2rgb` | `rgbplot`

Topics

"Control Colormap Limits"

Introduced before R2006a

colormapeditor

Open colormap editor

Syntax

```
colormapeditor
```

Description

`colormapeditor` displays the colormap for the current axes as a strip of rectangular cells in the colormap editor. Node pointers are colored cells below the colormap strip that indicate points in the colormap where the rate of the variation of R, G, and B values changes. You can also work in the HSV colorspace by setting the **Interpolating Colorspace** selector to HSV.

You can also start the colormap editor by selecting **Colormap** from the **Edit** menu.

Node Pointer Operations

You can select and move node pointers to change a range of colors in the colormap. The color of a node pointer remains constant as you move it, but the colormap changes by linearly interpolating the RGB values between nodes.

Change the color at a node by double-clicking the node pointer. A color picker box appears, from which you can select a new color. After you select a new color at a node, the colors between nodes are reinterpolated.

You can select a different color map using the **Standard Colormaps** submenu of the **Tools** menu. The Plotting Tools Property Editor has a dropdown menu that also lets you select from standard colormaps, but does not help you to modify a colormap.

Operation	How to Perform
Select a built-in colormap	**Tools** > **Standard Colormaps**

Operation	How to Perform
Add a node	Click below the corresponding cell in the colormap strip.
Select a node	Left-click the node.
Select multiple nodes	Adjacent: left-click first node, **Shift+click** the last node. Nonadjacent: left-click first node, **Ctrl+click** subsequent nodes.
Move a node	Select and drag with the mouse or select and use the left and right arrow keys.
Move multiple nodes	Select multiple nodes and use the left and right arrow keys to move nodes as a group. Movement stops when one of the selected nodes hits an unselected node or an end node.
Delete a node	Select the node and then press the **Delete** key, or select **Delete** from the **Edit** menu, or type **Ctrl+x**.
Delete multiple nodes	Select the nodes and then press the **Delete** key, or select **Delete** from the **Edit** menu, or type **Ctrl+x**.
Display color picker for a node	Double-click the node pointer.

Current Color Info

When you put the mouse over a color cell or node pointer, the colormap editor displays the following information about that colormap element:

- The element's index in the colormap
- The value from the graphics object color data that is mapped to the node's color (i.e., data from the `CData` property of any image, patch, or surface objects in the figure)
- The color's RGB and HSV color value

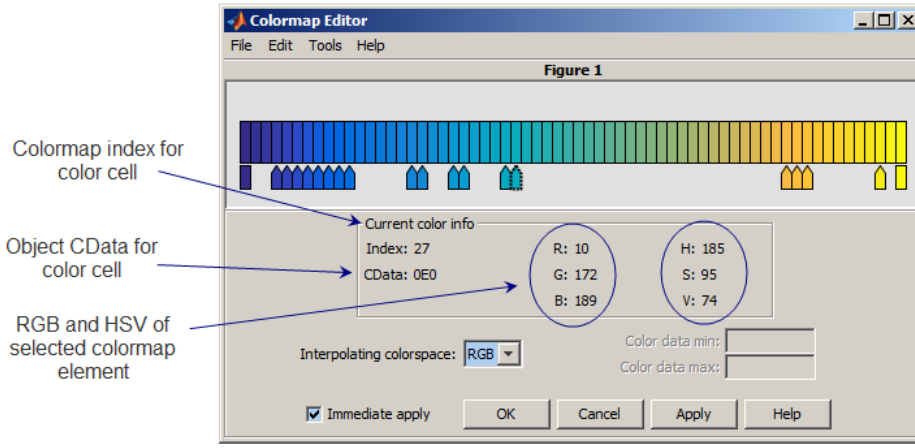

Interpolating Colorspace

The colorspace determines what values are used to calculate the colors of cells between nodes. For example, in the RGB colorspace, internode colors are calculated by linearly interpolating the red, green, and blue intensity values from one node to the next. Switching to the HSV colorspace causes the colormap editor to recalculate the colors between nodes using the hue, saturation, and value components of the color definition.

Note that when you switch from one colorspace to another, the color editor preserves the number, color, and location of the node pointers, which can cause the colormap to change.

Interpolating in HSV. Since hue is conceptually mapped about a color circle, the interpolation between hue values can be ambiguous. To minimize this ambiguity, the interpolation uses the shortest distance around the circle. For example, interpolating between two nodes, one with hue of 2 (slightly orange red) and another with a hue of 356 (slightly magenta red), does not result in hues 3,4,5...353,354,355 (orange/red-yellow-green-cyan-blue-magenta/red). Taking the shortest distance around the circle gives 357,358,1,2 (orange/red-red-magenta/red).

Color Data Min and Max

The **Color Data Min** and **Color Data Max** text fields enable you to specify values for the axes CLim property. These values change the mapping of object color data (the `CData` property of images, patches, and surfaces) to the colormap.

Examples

This example modifies a default MATLAB colormap so that ranges of data values are displayed in specific ranges of color. The graph is a slice plane illustrating a cross section of fluid flow through a jet nozzle. See the `slice` reference page for more information on this type of graph.

Enhance Colormap

This example modifies a default MATLAB colormap so that ranges of data values are displayed more prominently.

Create a slice plane for the flow dataset:

```
[x,y,z,v] = flow;
hz = slice(x,y,z,v,[],[],0);
hz.EdgeColor = 'none';
hz.FaceColor = 'interp';
view(2)
```

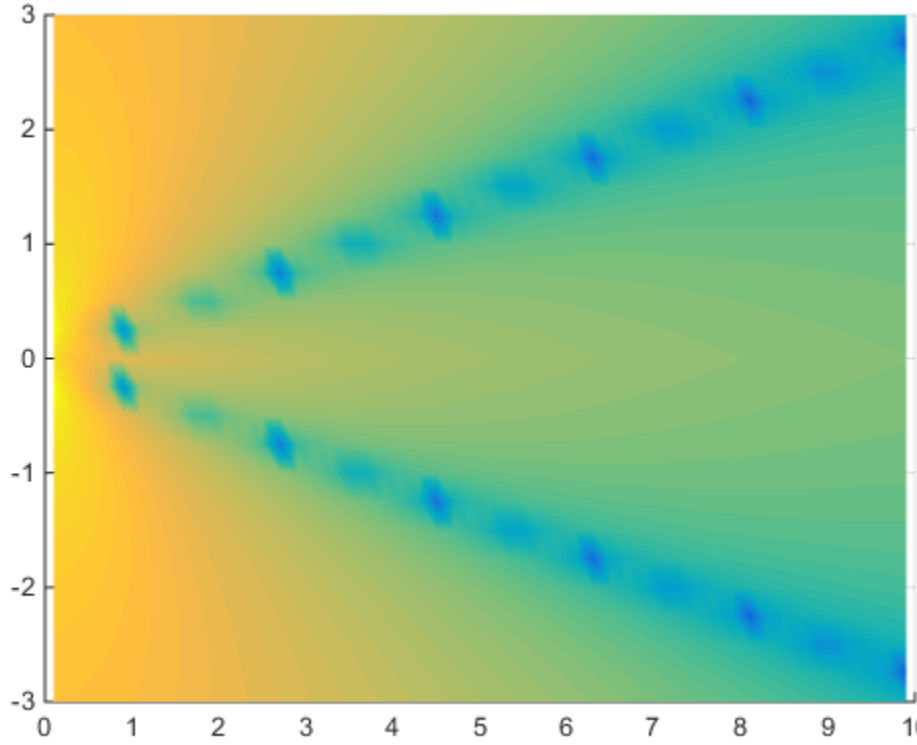

Start the colormap editor:

```
colormapeditor
```

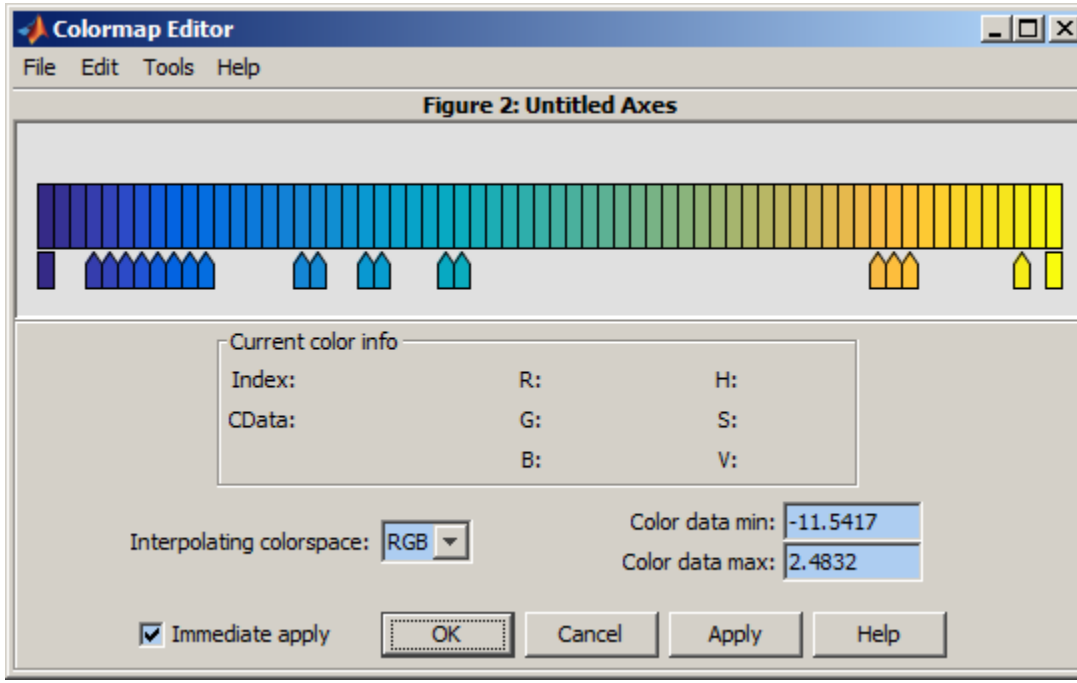

To reveal more information about the flow data, create more color variation in the region of interest. Add the color red for the largest color data value and blend it with the yellow and orange colors:

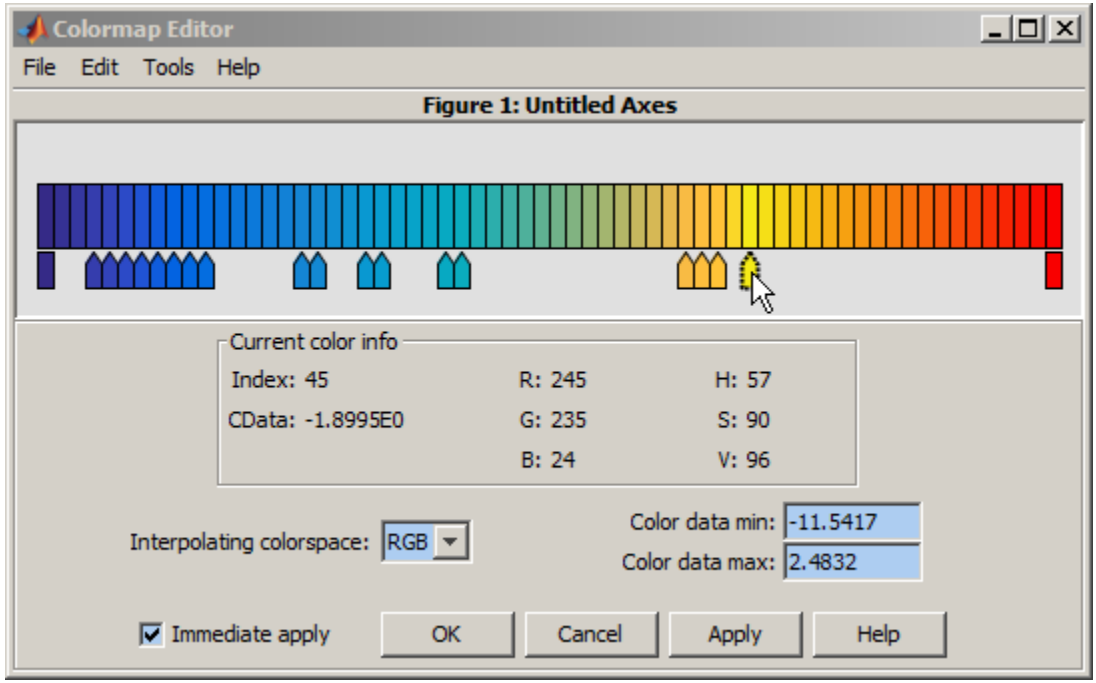

The new colormap reveals more of the flow data variation in the higher data values:

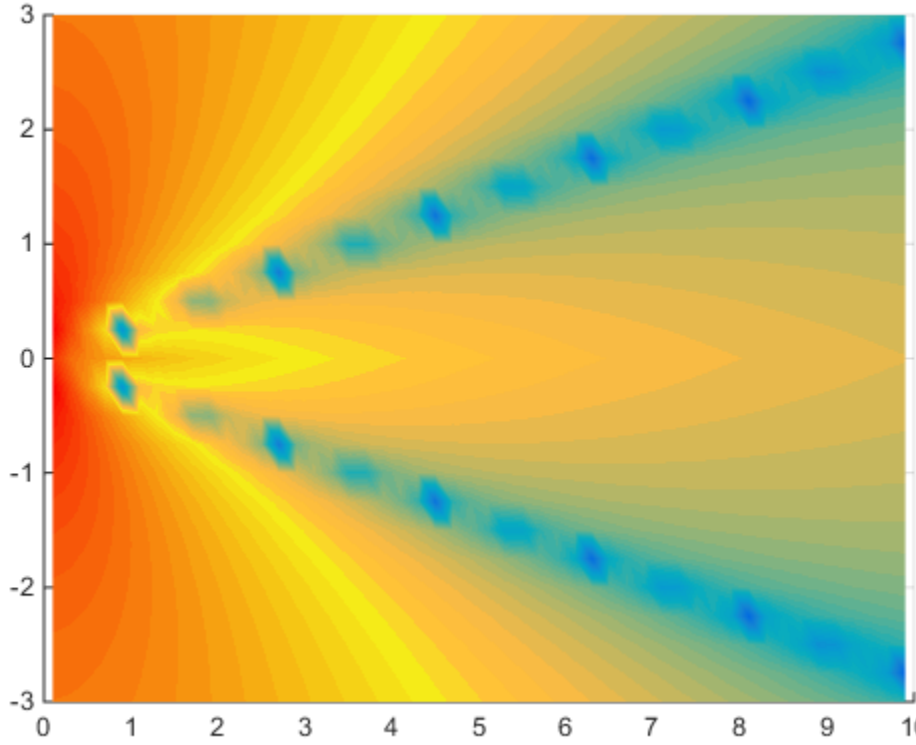

Saving the Modified Colormap

You can save the modified colormap using the `colormap` function.

After you have applied your changes, save the current axes colormap in a variable:

```
ax = gca;
mycmap = colormap(ax);
```

To use this colormap in another axes, for example `ax2`, set the colormap for the axes to `mycmap`:

```
colormap(ax2,mycmap)
```

To save your modified colormap in a MAT-file, use the `save` command to save the `mycmap` workspace variable:

```
save('MyColormaps','mycmap')
```

To use your saved colormap in another MATLAB session, `load` the variable into the workspace and assign the colormap to the current axes:

```
ax = gca;
load('MyColormaps','mycmap')
colormap(ax,mycmap)
```

See Also

`colormap` | `save` | `set` | `get` | `load` | `propertyeditor`

Introduced before R2006a

ColorSpec (Color Specification)

Color specification

Description

`ColorSpec` is not a function; it refers to the three ways in which you specify color for MATLAB graphics:

- RGB triplet
- Short name
- Long name

The short names and long names are character vectors that specify one of eight predefined colors. The RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color; the intensities must be in the range [0 1]. The following table lists the predefined colors and their RGB triplet equivalents.

RGB Triplet	Short Name	Long Name
`[1 1 0]`	`y`	`yellow`
`[1 0 1]`	`m`	`magenta`
`[0 1 1]`	`c`	`cyan`
`[1 0 0]`	`r`	`red`
`[0 1 0]`	`g`	`green`
`[0 0 1]`	`b`	`blue`
`[1 1 1]`	`w`	`white`
`[0 0 0]`	`k`	`black`

Examples

To change the background color of a figure to green, specify the color with a short name, a long name, or an RGB triplet. These statements generate equivalent results:

```
whitebg('g')
whitebg('green')
whitebg([0 1 0]);
```

This code changes the figure background color to pink:

```
fig = gcf;
fig.Color = [1 0.4 0.6];
```

Tips

The eight predefined colors and any colors you specify as RGB triplets are not part of a figure's colormap, nor are they affected by changes to the figure's colormap. They are referred to as *fixed* colors, as opposed to *colormap* colors.

In most cases, you can specify a color using either an RGB triplet or a character vector of a color name. However, in some cases, you cannot specify the color as a color name. For example, you cannot set the `CData` property of a scatter object to a color name.

See Also

`bar` | `bar3` | `colordef` | `fill` | `fill3` | `colormap` | `whitebg` | `uisetcolor`

colperm

Sparse column permutation based on nonzero count

Syntax

```
j = colperm(S)
```

Description

`j = colperm(S)` generates a permutation vector `j` such that the columns of `S(:,j)` are ordered according to increasing count of nonzero entries. This is sometimes useful as a preordering for LU factorization; in this case use `lu(S(:,j))`.

If `S` is symmetric, then `j = colperm(S)` generates a permutation `j` so that both the rows and columns of `S(j,j)` are ordered according to increasing count of nonzero entries. If `S` is positive definite, this is sometimes useful as a preordering for Cholesky factorization; in this case use `chol(S(j,j))`.

Examples

The `n`-by-`n` *arrowhead* matrix

```
A = [ones(1,n); ones(n-1,1) speye(n-1,n-1)]
```

has a full first row and column. Its LU factorization, `lu(A)`, is almost completely full. The statement

```
j = colperm(A)
```

returns `j = [2:n 1]`. So `A(j,j)` sends the full row and column to the bottom and the rear, and `lu(A(j,j))` has the same nonzero structure as `A` itself.

On the other hand, the Bucky ball example,

```
B = bucky
```

has exactly three nonzero elements in each row and column, so `j = colperm(B)` is the identity permutation and is no help at all for reducing fill-in with subsequent factorizations.

Algorithms

The algorithm involves a sort on the counts of nonzeros in each column.

See Also

`chol` | `colamd` | `lu` | `spparms` | `symamd` | `symrcm`

Introduced before R2006a

Combine

Convenience function for static .NET System.Delegate Combine method

Syntax

```
result = Combine(delegateA,delegateB)
```

Description

`result = Combine(delegateA,delegateB)` combines two delegates into a new delegate.

Input Arguments

`delegateA`

.NET `System.Delegate` object. The first delegate in the new delegate.

Default:

`delegateB`

.NET `System.Delegate` object. The last delegate in the new delegate.

Default:

Output Arguments

`result`

.NET `System.Delegate` object. A new delegate that delegates to the input delegate `delegateA`, then `delegateB`

Alternatives

Use the static `Combine` method of the `System.Delegate` class.

See Also

`Remove` | `RemoveAll`

Topics

"Combine and Remove .NET Delegates"

External Websites

MSDN System.Delegate.Combine Method reference page

Introduced in R2011a

comet

2-D comet plot

Syntax

```
comet(y)
comet(x,y)
comet(x,y,p)
comet(ax,...)
```

Description

`comet(y)` displays a comet graph of the vector `y`. A comet graph is an animated graph in which a circle (the comet *head*) traces the data points on the screen. The comet *body* is a trailing segment that follows the head. The *tail* is a solid line that traces the entire function.

`comet(x,y)` displays a comet graph of vector `y` versus vector `x`.

`comet(x,y,p)` specifies a comet body of length `p*length(y)`. `p` defaults to `0.1`.

`comet(ax,...)` plots into the axes `ax` instead of into the current axes (`gca`).

Examples

Create Comet Graph

```
t = 0:.01:2*pi;
x = cos(2*t).*(cos(t).^2);
y = sin(2*t).*(sin(t).^2);
comet(x,y);
```

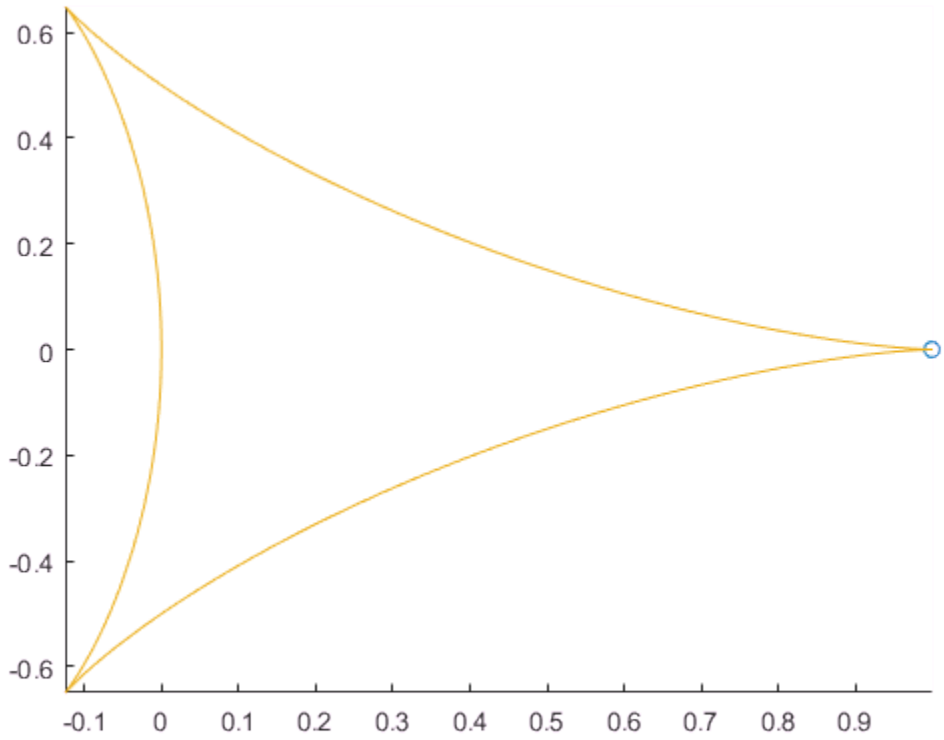

Tips

- Comet graphs do not support data tips.

See Also

`comet3` | `animatedline`

Introduced before R2006a

comet3

3-D comet plot

Syntax

```
comet3(z)
comet3(x,y,z)
comet3(x,y,z,p)
comet3(ax,...)
```

Description

A comet plot is an animated graph in which a circle (the comet *head*) traces the data points on the screen. The comet *body* is a trailing segment that follows the head. The *tail* is a solid line that traces the entire function.

`comet3(z)` displays a 3-D comet graph of the vector `z`.

`comet3(x,y,z)` displays a comet graph of the curve through the points `[x(i),y(i),z(i)]`.

`comet3(x,y,z,p)` specifies a comet body of length `p*length(y)`. `p` must be between `0` and `1`.

`comet3(ax,...)` plots into the axes `ax` instead of into the current axes (`gca`).

Examples

Create 3-D Comet Graph

```
t = -10*pi:pi/250:10*pi;
x = (cos(2*t).^2).*sin(t);
y = (sin(2*t).^2).*cos(t);
comet3(x,y,t);
```

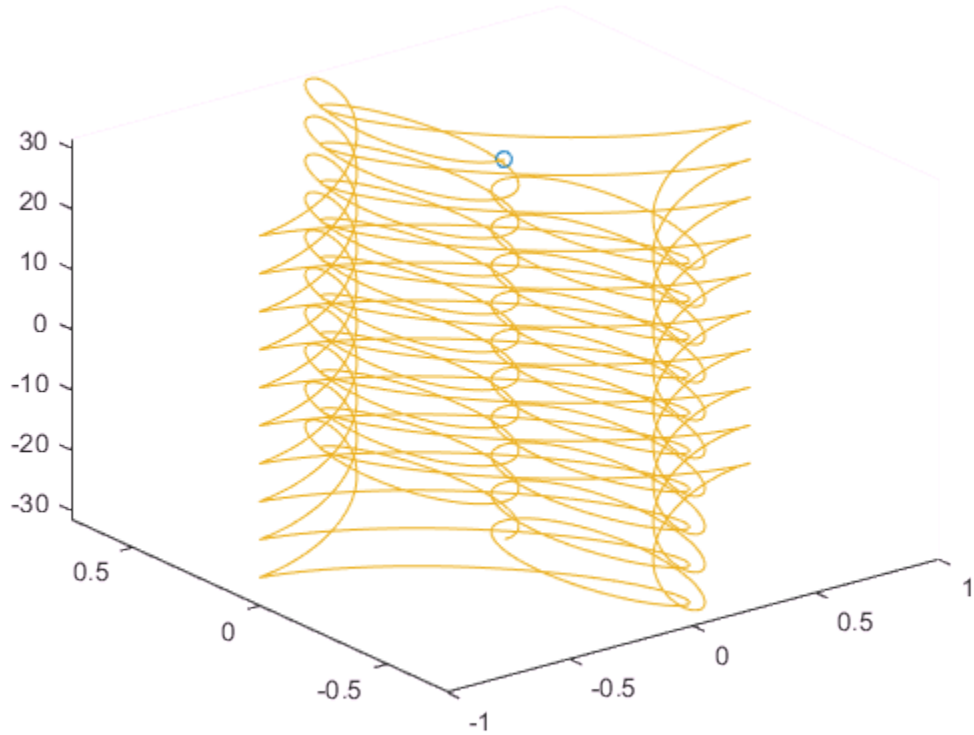

See Also

`comet` | `animatedline`

Introduced before R2006a

commandhistory

Open Command History window, or select it if already open

Syntax

```
commandhistory
```

Description

`commandhistory` opens the MATLAB Command History window when it is closed, and selects the Command History window when it is open. The Command History window presents a log of the statements most recently run in the Command Window.

See Also

`diary` | `prefdir` | `startup` | `filebrowser` | `workspace` | `commandwindow`

Topics

"Command History"

Introduced before R2006a

commandwindow

Open Command Window, or select it if already open

Syntax

```
commandwindow
```

Description

`commandwindow` opens the MATLAB Command Window when it is closed, and selects the Command Window when it is open. `commandwindow` is not supported when running MATLAB with the `-nodesktop` option.

Tips

To determine the number of columns and rows that display in the Command Window, given its current size, use

```
matlab.desktop.commandwindow.size
```

The number of columns is based on the width of the Command Window. With the matrix display width preference set to 80 columns, the number of columns is always 80.

See Also

`commandhistory` | `input` | `inputdlg` | `filebrowser` | `workspace`

Topics

"Optimize Desktop Layout for Limited Screen Space"
"Set Command Window Preferences"

Introduced before R2006a

compan

Companion matrix

Syntax

```
A = compan(u)
```

Description

`A = compan(u)` returns the corresponding companion matrix whose first row is `-u(2:n)/u(1)`, where `u` is a vector of polynomial coefficients. The eigenvalues of `compan(u)` are the roots of the polynomial.

Examples

Companion Matrix for Polynomial

Compute the companion matrix corresponding to the polynomial $(x-1)(x-2)(x+3) = x^3 - 7x + 6$.

```
u = [1 0 -7 6];
A = compan(u)
```

```
A =

     0     7    -6
     1     0     0
     0     1     0
```

The eigenvalues of `A` are the polynomial roots.

```
eig(A)
```

```
ans =
```

```
   -3.0000
    2.0000
    1.0000
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`roots` | `eig` | `poly` | `polyval`

Introduced before R2006a

compass

Plot arrows emanating from origin

Syntax

```
compass(U,V)
compass(Z)
compass(...,LineSpec)
compass(axes_handle,...)
h = compass(...)
```

Description

A compass graph displays the vectors with components `(U,V)` as arrows emanating from the origin. `U`, `V`, and `Z` are in Cartesian coordinates and plotted on a circular grid.

`compass(U,V)` displays a compass graph having *n* arrows, where *n* is the number of elements in `U` or `V`. The location of the base of each arrow is the origin. The location of the tip of each arrow is a point relative to the base and determined by `[U(i),V(i)]`.

`compass(Z)` displays a compass graph having *n* arrows, where *n* is the number of elements in `Z`. The location of the base of each arrow is the origin. The location of the tip of each arrow is relative to the base as determined by the real and imaginary components of `Z`. This syntax is equivalent to `compass(real(Z),imag(Z))`.

`compass(...,LineSpec)` draws a compass graph using the line type, marker symbol, and color specified by `LineSpec`.

`compass(axes_handle,...)` plots into the axes with the handle `axes_handle` instead of into the current axes (`gca`).

`h = compass(...)` returns handles to line objects.

Examples

Create Compass Graph

Create a compass graph of the eigenvalues of a random matrix.

```
rng(0,'twister') % initialize random number generator
M = randn(20,20);
Z = eig(M);

figure
compass(Z)
```

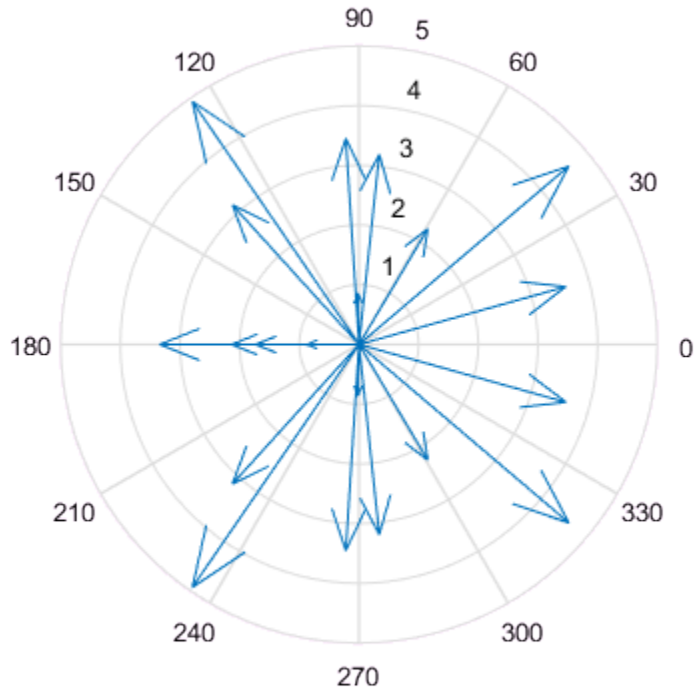

See Also

`feather` | `polarplot` | `quiver` | `rose`

Introduced before R2006a

complex

Create complex array

Syntax

```
z = complex(a,b)
z = complex(x)
```

Description

`z = complex(a,b)` creates a complex output, `z`, from two real inputs, such that `z = a + bi`.

The `complex` function provides a useful substitute for expressions, such as `a + 1i*b` or `a + 1j*b`, when

- `a` and `b` are not `double` or `single`
- `b` is all zeros

`z = complex(x)` returns the complex equivalent of `x`, such that `isreal(z)` returns logical `0` (`false`).

- If `x` is real, then `z` is `x + 0i`.
- If `x` is complex, then `z` is identical to `x`.

Examples

Complex Scalar from Two Real Scalars

Use the `complex` function to create the complex scalar, `3 + 4i`.

```
z = complex(3,4)
```

```
z =
   3.0000 + 4.0000i
```

Complex Vector from Two Complex Vectors

Create a complex `uint8` vector from two real `uint8` vectors. The size of `z`, 4-by-1, is the same as the size of the input arguments.

```
a = uint8([1;2;3;4]);
b = uint8([2;2;7;7]);

z = complex(a,b)
```

```
z = 4×1 uint8 column vector
   1 +   2i
   2 +   2i
   3 +   7i
   4 +   7i
```

Complex Scalar from One Real Scalar

Create a complex scalar with zero imaginary part.

```
z = complex(12)
```

```
z =
  12.0000 + 0.0000i
```

Verify that `z` is complex.

```
isreal(z)
```

```
ans = logical
   0
```

Input Arguments

a — Real component

scalar | vector | matrix | multidimensional array

Real component, specified as a scalar, vector, matrix, or multidimensional array.

The size of a must match the size of b, unless one is a scalar. If either a or b is a scalar, MATLAB expands the scalar to match the size of the other input.

a and b must be the same data type with the following exceptions:

- single can combine with double.
- scalar double can combine with an integer data type.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

b — Imaginary component
scalar | vector | matrix | multidimensional array

Imaginary component, specified as a scalar, vector, matrix, or multidimensional array.

The size of b must match the size of a, unless one is a scalar. If either a or b is a scalar, MATLAB expands the scalar to match the size of the other input.

a and b must be the same data type with the following exceptions:

- single can combine with double.
- scalar double can combine with an integer data type.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

x — Input array
scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64
Complex Number Support: Yes

Output Arguments

z — Complex array
scalar | vector | matrix | multidimensional array

Complex array, returned as a scalar, vector, matrix, or multidimensional array.

The size of `z` is the same as the input arguments.

The following describes the data type of `z`, when `a` and `b` have different data types.

- If either `a` or `b` is `single`, then `z` is `single`.
- If either `a` or `b` is an integer data type, then `z` is the same integer data type.

Tips

- If `b` contains only zeros, then `z` is complex and the value of all its imaginary components is `0`. In contrast, the addition `a + 0i` returns a strictly real result.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`abs` | `angle` | `conj` | `i` | `imag` | `isreal` | `j` | `real`

Topics

“Complex Numbers”

Introduced before R2006a

compose

Convert data into formatted string array

Syntax

```
str = compose(formatSpec,A)
str = compose(formatSpec,A1,...,AN)
str = compose(txt)
```

Description

`str = compose(formatSpec,A)` formats data values from the input array, `A`, using formatting operators specified by `formatSpec` and returns the resulting text in `str`. The `compose` function formats values from `A` in column order. If `formatSpec` is a string array, then so is the output array `str`. Otherwise, `str` is a character vector or cell array of character vectors.

`compose` also translates the escape-character sequences in `formatSpec`. Escape-character sequences represent nonprinting characters or specify actions such as newlines or tabs.

The `compose` function can return multiple pieces of formatted text as a string array or a cell array of character vectors, unlike `sprintf`. The `sprintf` function returns only a string scalar or a character vector.

- If `A` has multiple rows, then `compose` returns `str` as a string array or cell array with the same number of rows. `compose` repeats `formatSpec` in each row of `str`, with formatted values from the corresponding row of `A`.
- If the number of columns in `A` exceeds the number of operators in `formatSpec`, then `compose` repeats `formatSpec` as an additional column of `str`. The extra columns of `A` contribute formatted values to the new column of strings in `str`.
- If the number of columns in `A` is less than the number of operators in `formatSpec`, then `compose` does not format values using those operators. Instead, `compose` puts unchanged formatting operators in `str`. However, `compose` translates all escape-character sequences except for `\\` and `%%`.

`str = compose(formatSpec,A1,...,AN)` formats data values from multiple input arrays and concatenates all the formatted values. When `compose` uses formatting operators from `formatSpec` to convert data from an input array, then those formatting operators become unavailable to the following input arrays.

For example, if `formatSpec` is `"%f %f %d %s"` and `A1` has two columns, then the operators `"%f %f"` are applied to the values in `A1` only. They cannot be applied to `A2` or any other input array. `compose` applies the remaining operators, `"%d %s"`, to `A2,...,AN`.

If the number of columns in the last input array, `AN`, exceeds the number of remaining operators, then `compose` adds an additional column to `str`, as described in the previous syntax. If the number of columns in `AN` is less than the number of remaining operators, then `compose` puts the last unchanged operators in `str`.

`str = compose(txt)` translates escape-character sequences in `txt`.

- If `txt` does not contain formatting operators, then `compose` translates all escape-character sequences. It leaves all other characters unchanged.
- If `txt` contains formatting operators, then `compose` translates all escape-character sequences except for `\\` and `%%`. It leaves all other characters, including the formatting operators, unchanged.

Examples

Format Numbers into Strings

Format `pi` to eight decimal places and return it as a string.

```
A = pi
```

```
A = 3.1416
```

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Specify `formatSpec` as a string.

```
formatSpec = "%.8f"
```

```
formatSpec =
"%.8f"
```

```
str = compose(formatSpec,A)
```

```
str =
"3.14159265"
```

Create a numeric array that contains values of `pi` and `e`. Use the `%e` and `%f` operators with different precisions.

```
A = [pi exp(1)]
```

```
A =

    3.1416    2.7183
```

```
formatSpec = "The value of pi is %.2e; the value of e is %.5f.";
str = compose(formatSpec,A)
```

```
str =
"The value of pi is 3.14e+00; the value of e is 2.71828."
```

Format Columns of Values from Arrays

Format values taken from numeric arrays. Since the numeric arrays have multiple rows, `compose` returns a string array with the same number of rows.

```
X = [1 2 3 4 5]';
Y = X.^2;
```

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Specify `formatSpec` as a string and return the formatted values as a string array.

```
formatSpec = "%d.^2 = %d";
str = compose(formatSpec,X,Y)
```

```
str = 5×1 string array
    "1.^2 = 1"
    "2.^2 = 4"
    "3.^2 = 9"
    "4.^2 = 16"
    "5.^2 = 25"
```

Format Values with Extra or Missing Operators

Format values when the number of columns in the data array is not equal to the number of operators. If A has more columns, then `compose` repeats `formatSpec` as an additional column of the output string array.

Starting in R2017a, you can create strings using double quotes instead of the string function. Specify `formatSpec` as a string.

```
formatSpec = "The time is %d:%d";
A = [8 15 9 30;
     10 20 11 50];
str = compose(formatSpec,A)
```

```
str = 2×2 string array
    "The time is 8:15"     "The time is 9:30"
    "The time is 10:20"    "The time is 11:50"
```

Format values when A has fewer columns.

```
formatSpec = "Check-in time %d:%d; Check-out time %d:%d";
A = [12 27;
     11 16];
str = compose(formatSpec,A)
```

```
str = 2×1 string array
    "Check-in time 12:27; Check-out time %d:%d"
    "Check-in time 11:16; Check-out time %d:%d"
```

Since A has only two columns, `compose` uses only the first two formatting operators in `formatSpec` to format the values. `compose` leaves the other formatting operators unchanged.

Escape Characters in String Array

Create a string array that includes escape-character sequences to specify horizontal tabs. Use the `compose` function to translate the `\t` escape characters. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Name\tDate of Birth\tLocation";...
       "Jones\t10/20/2015\tUK";...
       "Simpson\t09/12/2015\tUSA"];
newStr = compose(str)
```

```
newStr = 3×1 string array
    "Name Date of Birth Location"
    "Jones 10/20/2015 UK"
    "Simpson 09/12/2015 USA"
```

Prevent translation of `\n` using another `\` character.

```
str = "Don''t escape the second\n\\n escaped-character sequence.";
newStr = compose(str)
```

```
newStr =
    "Don''t escape the second
     \n escaped-character sequence."
```

- "Create String Arrays"
- "Formatting Text"

Input Arguments

`formatSpec` — Formatting operators

string array | character vector | cell array of character vectors

Formatting operators, specified as a string array, character vector, or cell array of character vectors containing formatting operators. If `formatSpec` includes literal text representing escape characters, such as `\n`, then `compose` translates the escape characters.

Formatting Operator

A formatting operator starts with a percent sign, `%`, and ends with a conversion character. The conversion character is required. Optionally, you can specify flags, field width, precision, and subtype operators between `%` and the conversion character. (Spaces are invalid between operators and are shown here only for readability).

Conversion Character

This table shows conversion characters to format numeric and character data as text.

Value Type	Conversion	Details
Integer, signed	`%d` or `%i`	Base 10

Value Type	Conversion	Details
Integer, unsigned	`%u`	Base 10
	`%o`	Base 8 (octal)
	`%x`	Base 16 (hexadecimal), lowercase letters `a`–`f`
	`%X`	Same as `%x`, uppercase letters `A`–`F`
Floating-point number	`%f`	Fixed-point notation (Use a precision operator to specify the number of digits after the decimal point.)
	`%e`	Exponential notation, such as `3.141593e+00` (Use a precision operator to specify the number of digits after the decimal point.)
	`%E`	Same as `%e`, but uppercase, such as `3.141593E+00` (Use a precision operator to specify the number of digits after the decimal point.)
	`%g`	The more compact of `%e` or `%f`, with no trailing zeros (Use a precision operator to specify the number of significant digits.)
	`%G`	The more compact of `%E` or `%f`, with no trailing zeros (Use a precision operator to specify the number of significant digits.)
Characters	`%c`	Single character
	`%s`	Character vector

Optional Operators

The optional identifier, flags, field width, precision, and subtype operators further define the format of the output text.

- **Flags**

`'-'`	Left-justify. **Example:** `%-5.2f`
`'+'`	Always print a sign character (+ or –) for any value.

	Example: `%+5.2f`
`' '`	Insert a space before the value. **Example:** `% 5.2f`
`'0'`	Pad to field width with zeros before the value. **Example:** `%05.2f`
`'#'`	Modify selected numeric conversions: • For `%o`, `%x`, or `%X`, print `0`, `0x`, or `0X` prefix. • For `%f`, `%e`, or `%E`, print decimal point even when precision is 0. • For `%g` or `%G`, do not remove trailing zeros or decimal point. **Example:** `%#5.0f`

- **Field Width**

  Minimum number of characters to print.

  Example: `compose('%12d',intmax)` returns `" 2147483647"`.

  The function pads to field width with spaces before the value unless otherwise specified by flags.

- **Precision**

  Number of digits to print.

For `%f`, `%e`, or `%E`	Number of digits to the right of the decimal point **Example:** `'%.4f'` prints `pi` as `'3.1416'`
For `%g` or `%G`	Number of significant digits **Example:** `'%.4g'` prints `pi` as `' 3.142'`

  Example: `compose('%6.4f',pi)` returns `"3.1416"`.

  Note: If you specify a precision operator for floating-point values that exceeds the precision of the input numeric data type, the results might not match the input values to the precision you specified. The result depends on your computer hardware and operating system.

- **Subtypes**

You can use a subtype operator to print a floating-point value as its octal, decimal, or hexadecimal value. The subtype operator immediately precedes the conversion character. This table shows the conversions that can use subtypes.

Input Value Type	Subtype and Conversion Character	Output Value Type

Floating-point number	`%bx` or `%bX`
	`%bo`
	`%bu`
		Double-precision hexadecimal, octal, or decimal value
		Example: `%bx` prints `pi` as `400921fb54442d18`

	`%tx` or `%tX`
	`%to`
	`%tu`
		Single-precision hexadecimal, octal, or decimal value
		Example: `%tx` prints `pi` as `40490fdb`

Notable Behavior of Conversions with Formatting Operators

- Numeric conversions print only the real component of complex numbers.
- If you specify a conversion that does not fit the data, such as a character conversion for a numeric value, MATLAB overrides the specified conversion, and uses `%e`.

  Example: `'%s'` converts `pi` to `3.141593e+00`.
- If you apply a string conversion (`%s`) to integer values, MATLAB converts values that correspond to valid character codes to characters.

  Example: `'%s'` converts `[65 66 67]` to `"ABC"`.

Data Types: `string` | `char` | `cell`

A — Numeric, character, or string array

scalar | vector | matrix | multidimensional array

Numeric, character, or string array, specified as scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string`

`txt` — Input text
string array | character vector | cell array of character vectors

Input text, specified as a string array, character vector, or cell array of character vectors. `compose` translates any escape-character sequences in `txt`. For example, `compose` translates `\n` into a newline character.

Data Types: `string` | `char` | `cell`

Output Arguments

`str` — Formatted text
string array | character vector | cell array of character vectors

Formatted text, returned as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

The `format` input must be a non-tall string.

For more information, see “Tall Arrays”.

See Also

See Also
`fprintf` | `fscanf` | `sprintf` | `sscanf` | `string`

Topics

"Create String Arrays"
"Formatting Text"

Introduced in R2016b

computeStrip

Class: Tiff

Index number of strip containing specified coordinate

Syntax

```
stripNumber = computeStrip(tiffobj,row)
stripNumber = computeStrip(tiffobj,row,plane)
```

Description

`stripNumber = computeStrip(tiffobj,row)` returns the index number of the strip containing the given row. The value of `row` must be one-based.

`stripNumber = computeStrip(tiffobj,row,plane)` returns the index number of the strip containing the given row in the specified plane, if the value of the `PlanarConfiguration` tag is `Tiff.PlanarConfiguration.Separate`. The values of row and plane must be one-based.

`computeStrip` clamps out-of-range coordinate values to the bounds of the image.

Examples

Determine Index Number of Strip

Determine the index number of the strip containing a row in the second image of a file.

Create a `Tiff` object associated with the example file, `example.tif`, and make the second image the current directory.

```
t = Tiff('example.tif','r');
setDirectory(t,2)
```

Get the number of rows in the image. Then, get the index of the strip containing the middle row.

```
numRows = getTag(t,'ImageLength');
stripNumber = computeStrip(t,numRows/2)
```

```
stripNumber = 4
```

Close the `Tiff` object.

```
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFComputeStrip` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.computeTile

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

computeTile

Class: Tiff

Index number of tile containing specified coordinates

Syntax

```
tileNumber = computeTile(tiffobj,[row col])
tileNumber = computeTile(tiffobj,[row col],plane)
```

Description

`tileNumber = computeTile(tiffobj,[row col])` returns the index number of the tile containing the pixel specified by the one-based indices, `row` and `col`.

`tileNumber = computeTile(tiffobj,[row col],plane)` returns the index number of the tile containing the pixel specified by the indices in the specified plane, if the value of the `PlanarConfiguration` tag is `Tiff.PlanarConfiguration.Separate`. The row, column, and plane coordinate values are one-based.

`computeTile` clamps out-of-range coordinate values to the bounds of the image.

Examples

Get Index Number of Tile Containing Last Pixel

Open a `Tiff` object and get the dimensions of the image to calculate coordinates.

```
t = Tiff('example.tif','r');
numRows = getTag(t,'ImageLength');
numCols = getTag(t,'ImageWidth');
```

Get the ID number of the tile containing the coordinates.

```
tileNum = computeTile(t,[numRows numCols])
```

```
tileNum = 110
```

Close the `Tiff` object.

```
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFComputeTile` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.computeStrip

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

computer

Information about computer on which MATLAB software is running

Syntax

```
str = computer
archstr = computer('arch')
[str,maxsize] = computer
[str,maxsize,endian] = computer
```

Description

`str = computer` returns the character vector `str` with the computer type on which MATLAB is running.

`archstr = computer('arch')` returns the character vector `archstr` which is used by the `mex` command and standalone applications to locate MATLAB library files.

`[str,maxsize] = computer` returns the integer `maxsize`, the maximum number of elements allowed in an array with this version of MATLAB.

`[str,maxsize,endian] = computer` returns either 'L' for little-endian byte ordering or 'B' for big-endian byte ordering.

Platform	Word Size	str	archstr	maxsize	endian	ispc	isunix	ismac
Microsoft Windows	64-bit	PCWIN64	win64	2^48 - 1	L	1	0	0
Linux	64-bit	GLNXA64	glnxa64	2^48 - 1	L	0	1	0
Apple Mac	64-bit	MACI64	maci64	2^48 - 1	L	0	1	1

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Information about the computer on which the code generator is running.
- Use only when the code generation target is S-function (Simulation) or MEX-function.

See Also

See Also

`getenv` | `ismac` | `ispc` | `isunix` | `setenv` | `winopen`

Introduced before R2006a

cond

Condition number with respect to inversion

Syntax

```
c = cond(X)
c = cond(X,p)
```

Description

The *condition number* of a matrix measures the sensitivity of the solution of a system of linear equations to errors in the data. It gives an indication of the accuracy of the results from matrix inversion and the linear equation solution. Values of `cond(X)` and `cond(X,p)` near 1 indicate a well-conditioned matrix.

`c = cond(X)` returns the 2-norm condition number, the ratio of the largest singular value of `X` to the smallest.

`c = cond(X,p)` returns the matrix condition number in `p`-norm:

```
norm(X,p) * norm(inv(X),p)
```

If p is...	Then cond(X,p) returns the...
1	1-norm condition number
2	2-norm condition number
'fro'	Frobenius norm condition number
inf	Infinity norm condition number

Algorithms

The algorithm for `cond` (when `p = 2`) uses the singular value decomposition, `svd`. When the input matrix is sparse, `cond` ignores any specified `p` value and calls `condest`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`condeig` | `condest` | `norm` | `normest` | `rank` | `rcond` | `svd`

Introduced before R2006a

condeig

Condition number with respect to eigenvalues

Syntax

```
c = condeig(A)
[V,D,s] = condeig(A)
```

Description

`c = condeig(A)` returns a vector of condition numbers for the eigenvalues of `A`. These condition numbers are the reciprocals of the cosines of the angles between the left and right eigenvectors.

`[V,D,s] = condeig(A)` is equivalent to

```
[V,D] = eig(A);
s = condeig(A);
```

Large condition numbers imply that `A` is near a matrix with multiple eigenvalues.

See Also

`balance` | `cond` | `eig`

Introduced before R2006a

condest

1-norm condition number estimate

Syntax

```
c = condest(A)
c = condest(A,t)
[c,v] = condest(A)
```

Description

`c = condest(A)` computes a lower bound `c` for the 1-norm condition number of a square matrix `A`.

`c = condest(A,t)` changes `t`, a positive integer parameter equal to the number of columns in an underlying iteration matrix. Increasing the number of columns usually gives a better condition estimate but increases the cost. The default is `t = 2`, which almost always gives an estimate correct to within a factor 2.

`[c,v] = condest(A)` also computes a vector `v` which is an approximate null vector if `c` is large. `v` satisfies `norm(A*v,1) = norm(A,1)*norm(v,1)/c`.

Note: `condest` invokes `rand`. If repeatable results are required then use `rng` to set the random number generator to its startup settings before using `condest`.

```
rng('default')
```

Tips

This function is particularly useful for sparse matrices.

Algorithms

`condest` is based on the 1-norm condition estimator of Hager [1] and a block-oriented generalization of Hager's estimator given by Higham and Tisseur [2]. The heart of the

algorithm involves an iterative search to estimate $\left\|A^{-1}\right\|_1$ without computing A^{-1}. This is posed as the convex but nondifferentiable optimization problem $\max\left\|A^{-1}\mathbf{x}\right\|_1$ subject to $\left\|\mathbf{x}\right\|_1 = 1$

References

[1] William W. Hager, "Condition Estimates," *SIAM J. Sci. Stat. Comput. 5*, 1984, 311-316, 1984.

[2] Nicholas J. Higham and Françoise Tisseur, "A Block Algorithm for Matrix 1-Norm Estimation with an Application to 1-Norm Pseudospectra, "*SIAM J. Matrix Anal. Appl.*, Vol. 21, 1185-1201, 2000.

See Also

`cond` | `norm` | `normest`

Introduced before R2006a

coneplot

Plot velocity vectors as cones in 3-D vector field

Syntax

```
coneplot(X,Y,Z,U,V,W,Cx,Cy,Cz)
coneplot(U,V,W,Cx,Cy,Cz)
coneplot(...,s)
coneplot(...,color)
coneplot(...,'quiver')
coneplot(...,'method')
coneplot(X,Y,Z,U,V,W,'nointerp')
coneplot(axes_handle,...)
h = coneplot(...)
```

Description

`coneplot(X,Y,Z,U,V,W,Cx,Cy,Cz)` plots velocity vectors as cones pointing in the direction of the velocity vector and having a length proportional to the magnitude of the velocity vector. `X`, `Y`, `Z` define the coordinates for the vector field. `U`, `V`, `W` define the vector field. These arrays must be the same size, monotonic, and represent a Cartesian, axis-aligned grid (such as the data produced by `meshgrid`). `Cx`, `Cy`, `Cz` define the location of the cones in the vector field. The section "Specifying Starting Points for Stream Plots" in Visualization Techniques provides more information on defining starting points.

`coneplot(U,V,W,Cx,Cy,Cz)` (omitting the `X`, `Y`, and `Z` arguments) assumes `[X,Y,Z] = meshgrid(1:n,1:m,1:p)`, where `[m,n,p]= size(U)`.

`coneplot(...,s)` automatically scales the cones to fit the graph and then stretches them by the scale factor `s`. If you do not specify a value for `s`, `coneplot` uses a value of 1. Use `s = 0` to plot the cones without automatic scaling.

`coneplot(...,color)` interpolates the array `color` onto the vector field and then colors the cones according to the interpolated values. The size of the `color` array must be the same size as the `U`, `V`, `W` arrays. This option works only with cones (that is, not with the `quiver` option).

`coneplot(...,'quiver')` draws arrows instead of cones (see `quiver3` for an illustration of a quiver plot).

`coneplot(...,'method')` specifies the interpolation method to use. *`method`* can be `linear`, `cubic`, or `nearest`. `linear` is the default. (See `interp3` for a discussion of these interpolation methods.)

`coneplot(X,Y,Z,U,V,W,'nointerp')` does not interpolate the positions of the cones into the volume. The cones are drawn at positions defined by `X`, `Y`, `Z` and are oriented according to `U`, `V`, `W`. Arrays `X`, `Y`, `Z`, `U`, `V`, `W` must all be the same size.

`coneplot(axes_handle,...)` plots into the axes with the handle `axes_handle` instead of into the current axes (`gca`).

`h = coneplot(...)` returns the handle to the `patch` object used to draw the cones.

`coneplot` automatically scales the cones to fit the graph, while keeping them in proportion to the respective velocity vectors.

Examples

3-D Cone Plot

Plot velocity vector cones for vector volume data representing motion of air through a rectangular region of space.

Load the data. The `wind` data set contains the arrays `u`, `v`, and `w` that specify the vector components and the arrays `x`, `y`, and `z` that specify the coordinates.

```
load wind
```

Establish the range of the data to place the slice planes and to specify where you want the cone plots.

```
xmin = min(x(:));
xmax = max(x(:));
ymin = min(y(:));
ymax = max(y(:));
zmin = min(z(:));
```

Define where to plot the cones. Select the full range in `x` and `y` and select the range 3 to 15 in `z`.

```
xrange = linspace(xmin,xmax,8);
yrange = linspace(ymin,ymax,8);
zrange = 3:4:15;
[cx,cy,cz] = meshgrid(xrange,yrange,zrange);
```

Plot the cones and set the scale factor to 5 to make the cones larger than the default size.

```
figure
hcone = coneplot(x,y,z,u,v,w,cx,cy,cz,5);
```

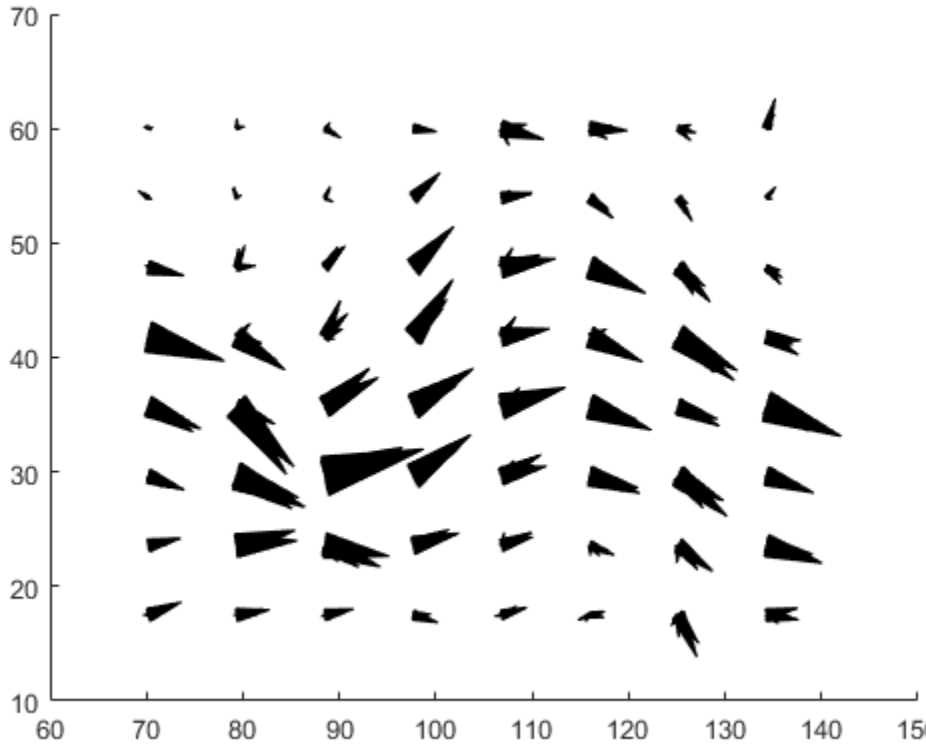

Set the cone colors.

```
hcone.FaceColor = 'red';
hcone.EdgeColor = 'none';
```

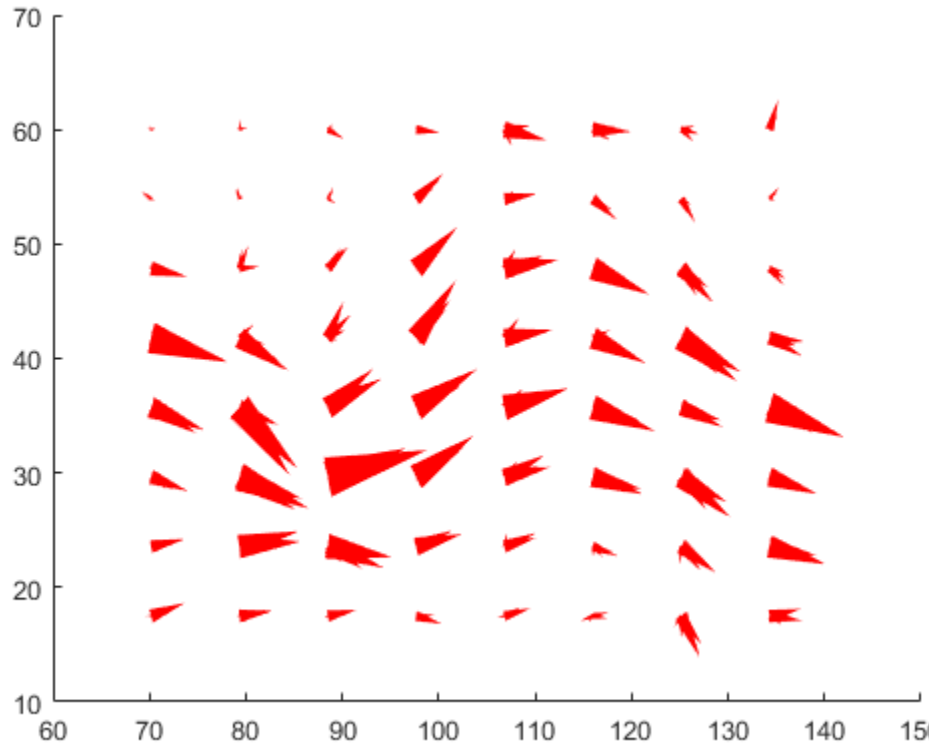

Calculate the magnitude of the vector field (which represents wind speed) to generate scalar data for the `slice` command.

```
hold on
wind_speed = sqrt(u.^2 + v.^2 + w.^2);
```

Create slice planes along the *x*-axis at `xmin` and `xmax`, along the *y*-axis at `ymax`, and along the *z*-axis at `zmin`. Specify interpolated face color so the slice coloring indicates wind speed, and do not draw edges.

```
hsurfaces = slice(x,y,z,wind_speed,[xmin,xmax],ymax,zmin);
set(hsurfaces,'FaceColor','interp','EdgeColor','none')
hold off
```

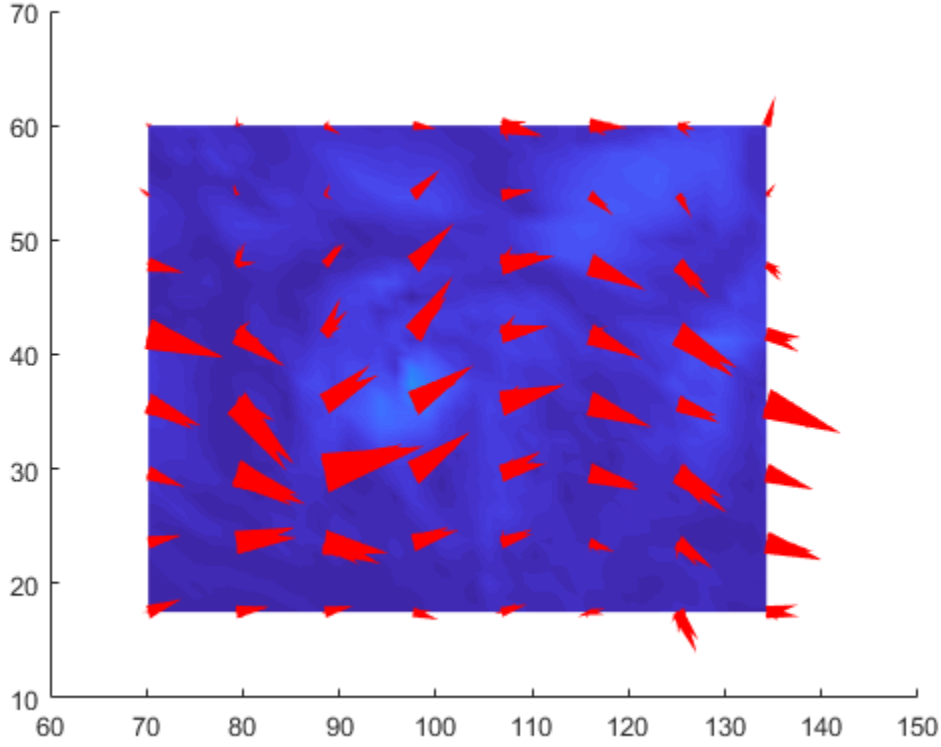

Change the axes view and set the data aspect ratio.

```
view(30,40)
daspect([2,2,1])
```

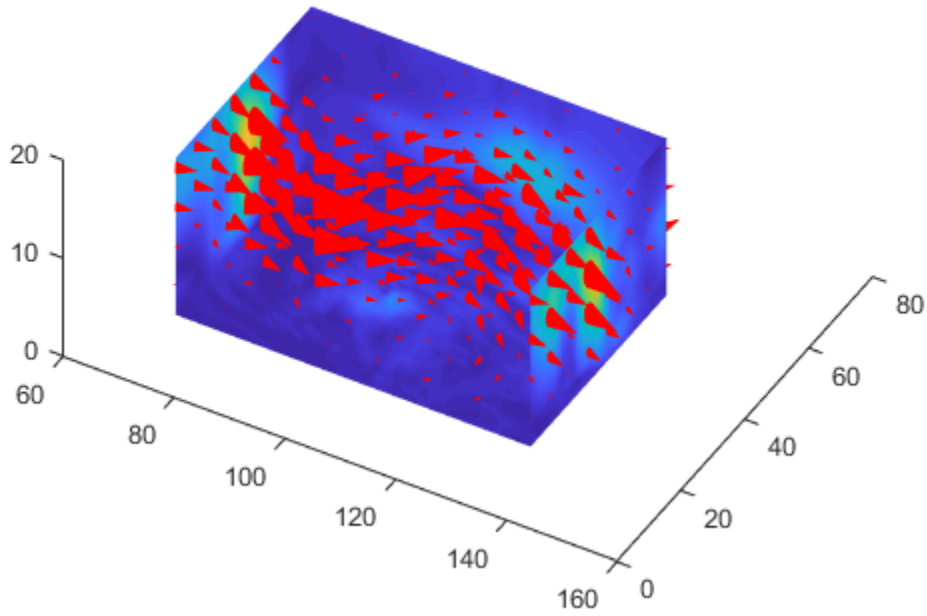

Add a light source to the right of the camera and use Gouraud lighting to give the cones and slice planes a smooth, three-dimensional appearance.

```
camlight right
lighting gouraud
set(hsurfaces,'AmbientStrength',0.6)
hcone.DiffuseStrength = 0.8;
```

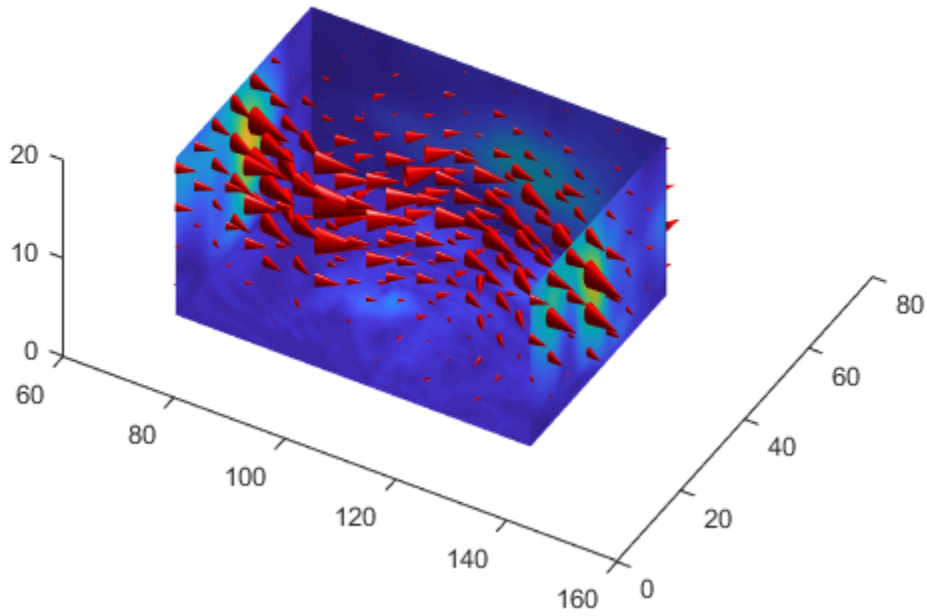

Tutorials

- "Overview of Volume Visualization"

See Also

`isosurface` | `patch` | `reducevolume` | `smooth3` | `streamline` | `stream2` | `stream3` | `subvolume`

Topics

"Overview of Volume Visualization"

Introduced before R2006a

conj

Complex conjugate

Syntax

```
ZC = conj(Z)
```

Description

`ZC = conj(Z)` returns the complex conjugate of the elements of `Z`.

Algorithms

If `Z` is a complex array:

```
conj(Z) = real(Z) - i*imag(Z)
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`i` | `j` | `imag` | `real`

Introduced before R2006a

contains

Determine if pattern is in string

Syntax

```
TF = contains(str,pattern)
TF = contains(str,pattern,'IgnoreCase',true)
```

Description

`TF = contains(str,pattern)` returns `1` (`true`) if `str` contains the specified pattern, and returns `0` (`false`) otherwise.

If `pattern` is an array containing multiple patterns, then `contains` returns `1` if it finds any element of `pattern` in `str`.

`TF = contains(str,pattern,'IgnoreCase',true)` ignores case when determining if `str` contains `pattern`.

Examples

Search for Single Pattern

Create a string array that contains names. Determine which strings contain `Paul`.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Mary Ann Jones","Paul Jay Burns","John Paul Smith"]
```

```
str = 1×3 string array
    "Mary Ann Jones"    "Paul Jay Burns"    "John Paul Smith"
```

Return a logical array where the position of each element equal to `1` corresponds to the position of a string in `str` that contains `Paul`.

```
pattern = "Paul";
TF = contains(str,pattern)
```

```
TF = 1×3 logical array
   0   1   1
```

Display the strings that contain `Paul`. Index back into `str` using `TF`.

```
str(TF)
```

```
ans = 1×2 string array
    "Paul Jay Burns"    "John Paul Smith"
```

Search for Multiple Patterns

Create a string array that contains names. Determine which strings contain either `Ann` or `Paul`.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Mary Ann Jones","Christopher Matthew Burns","John Paul Smith"]
```

```
str = 1×3 string array
    "Mary Ann Jones"    "Christopher Matthew Burns"    "John Paul Smith"
```

```
pattern = ["Ann","Paul"];
TF = contains(str,pattern)
```

```
TF = 1×3 logical array
   1   0   1
```

Display the strings that contain either `Ann` or `Paul`. Index back into `str` using `TF`.

```
str(TF)
```

```
ans = 1×2 string array
    "Mary Ann Jones"    "John Paul Smith"
```

Ignore Case

Create a string array that contains names. Determine which names contain `anne`, ignoring case.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Anne","Elizabeth","Marianne","Tracy"]
```

```
str = 1×4 string array
    "Anne"    "Elizabeth"    "Marianne"    "Tracy"
```

```
pattern = "anne";
TF = contains(str,pattern,'IgnoreCase',true)
```

```
TF = 1×4 logical array
   1   0   1   0
```

Display the strings that contain `anne`. Index back into `str` using `TF`.

```
str(TF)
```

```
ans = 1×2 string array
    "Anne"    "Marianne"
```

Determine if Character Vector Contains Pattern

Create a character vector that contains a list of foods. Determine whether the names of different foods are in the character vector.

```
chr = 'peppers, onions, and mushrooms';
TF = contains(chr,'onion')
```

```
TF = logical
   1
```

```
TF = contains(chr,'pineapples')
```

```
TF = logical
   0
```

- "Create String Arrays"
- "Search and Replace Text"
- "Compare Text"
- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text
string array | character vector | cell array of character vectors

Input string.

Data Types: `string` | `char` | `cell`

`pattern` — Search pattern
string array | character vector | cell array of character vectors

Search pattern, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

See Also

See Also

`endsWith` | `find` | `regexp` | `startsWith` | `strcmp` | `strfind`

Topics

"Create String Arrays"
"Search and Replace Text"
"Compare Text"
"Test for Empty Strings and Missing Values"

Introduced in R2016b

continue

Pass control to next iteration of `for` or `while` loop

Syntax

```
continue
```

Description

`continue` passes control to the next iteration of a `for` or `while` loop. It skips any remaining statements in the body of the loop for the current iteration. The program continues execution from the next iteration.

`continue` applies only to the body of the loop where it is called. In nested loops, `continue` skips remaining statements only in the body of the loop in which it occurs.

Examples

Selectively Display Values in Loop

Display the multiples of 7 from 1 through 50. If a number is not divisible by 7, use `continue` to skip the `disp` statement and pass control to the next iteration of the `for` loop.

```
for n = 1:50
    if mod(n,7)
        continue
    end
    disp(['Divisible by 7: ' num2str(n)])
end
```

```
Divisible by 7: 7

Divisible by 7: 14

Divisible by 7: 21

Divisible by 7: 28
```

```
Divisible by 7: 35

Divisible by 7: 42

Divisible by 7: 49
```

Skip to Next Loop Iteration

Count the number of lines of code in the file `magic.m`. Skip blank lines and comments using a `continue` statement. `continue` skips the remaining instructions in the `while` loop and begins the next iteration.

```
fid = fopen('magic.m','r');
count = 0;
while ~feof(fid)
    line = fgetl(fid);
    if isempty(line) || strncmp(line,'%',1) || ~ischar(line)
        continue
    end
    count = count + 1;
end
count
```

```
count = 31
```

```
fclose(fid);
```

Tips

- The `continue` statement skips the rest of the instructions in a `for` or `while` loop and begins the next iteration. To exit the loop completely, use a `break` statement.
- `continue` is not defined outside a `for` or `while` loop. To exit a function, use `return`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`break` | `for` | `while`

Introduced before R2006a

contour

Contour plot of matrix

Syntax

```
contour(Z)
contour(Z,n)
contour(Z,v)
contour(X,Y,Z)
contour(X,Y,Z,n)
contour(X,Y,Z,v)
contour(...,LineSpec)
contour(...,Name,Value)
contour(ax,...)
[C,h] = contour(...)
```

Description

A contour plot displays isolines of matrix `Z`. Label the contour lines using `clabel`.

`contour(Z)` draws a contour plot of matrix `Z`, where `Z` is interpreted as heights with respect to the *x*-*y* plane. `Z` must be at least a 2-by-2 matrix that contains at least two different values. The *x* values correspond to the column indices of `Z` and the *y* values correspond to the row indices of `Z`. The contour levels are chosen automatically.

`contour(Z,n)` draws a contour plot of matrix `Z` with `n` contour levels where `n` is a scalar. The contour levels are chosen automatically.

`contour(Z,v)` draws a contour plot of matrix `Z` with contour lines at the data values specified in the monotonically increasing vector `v`. To display a single contour line at a particular value, define `v` as a two-element vector with both elements equal to the desired contour level. For example, to draw contour lines at level `k`, use `contour(Z,[k k])`. Specifying the vector `v` sets the LevelListMode property to manual.

`contour(X,Y,Z)`, `contour(X,Y,Z,n)`, and `contour(X,Y,Z,v)` draw contour plots of `Z` using `X` and `Y` to determine the *x* and *y* values.

- If X and Y are vectors, then length(X) must equal size(Z,2) and length(Y) must equal size(Z,1). The vectors must be strictly increasing or strictly decreasing and cannot contain any repeated values.
- If X and Y are matrices, then their sizes must equal the size of Z. Typically, you should set X and Y so that the columns are strictly increasing or strictly decreasing and the rows are uniform (or the rows are strictly increasing or strictly decreasing and the columns are uniform).

If X or Y is irregularly spaced, then contour calculates contours using a regularly spaced contour grid, and then transforms the data to X or Y.

contour(...,LineSpec) draws the contours using the line type and color specified by LineSpec. contour ignores marker symbols.

contour(...,Name,Value) specifies contour properties using one or more property name, property value pairs. Name is the property name and must appear inside single quotes (''). Value is the corresponding value. For example, 'LineWidth',2 sets the contour line width to 2. For a list of contour property names and values, see Contour Properties.

contour(ax,...) plots into the axes specified by ax instead of the current axes (gca).

[C,h] = contour(...) returns the contour matrix C containing the data that defines the contour lines, and the Contour object h. The ContourMatrix property for the Contour object also contains the contour matrix. The clabel function uses the contour matrix to label the contour lines.

Use Contour object properties to control the contour plot appearance. For a list, see Contour Properties.

Examples

Create Contour Plot

Use the meshgrid function to generate matrices X and Y. Create a third matrix, Z, and plot its contours.

```
x = linspace(-2*pi,2*pi);
y = linspace(0,4*pi);
[X,Y] = meshgrid(x,y);
```

```
Z = sin(X)+cos(Y);

figure
contour(X,Y,Z)
```

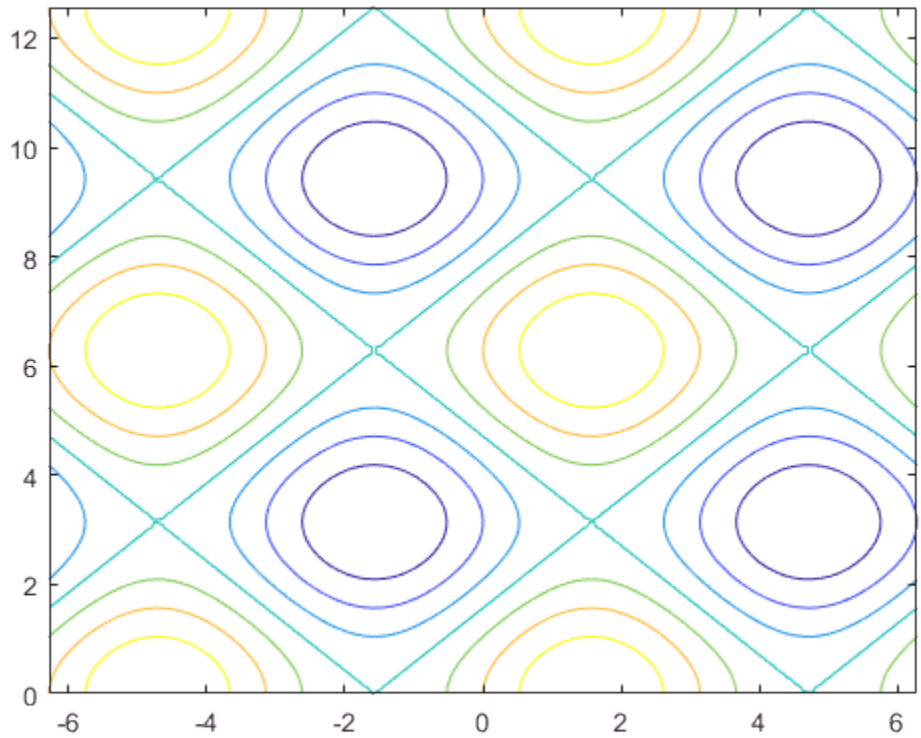

Specify Number of Contour Lines

Store the data from the `peaks` function in matrices `X`, `Y`, and `Z`. Plot 20 contours of the data in `Z`.

```
[X,Y,Z] = peaks;
figure
```

```
contour(X,Y,Z,20)
```

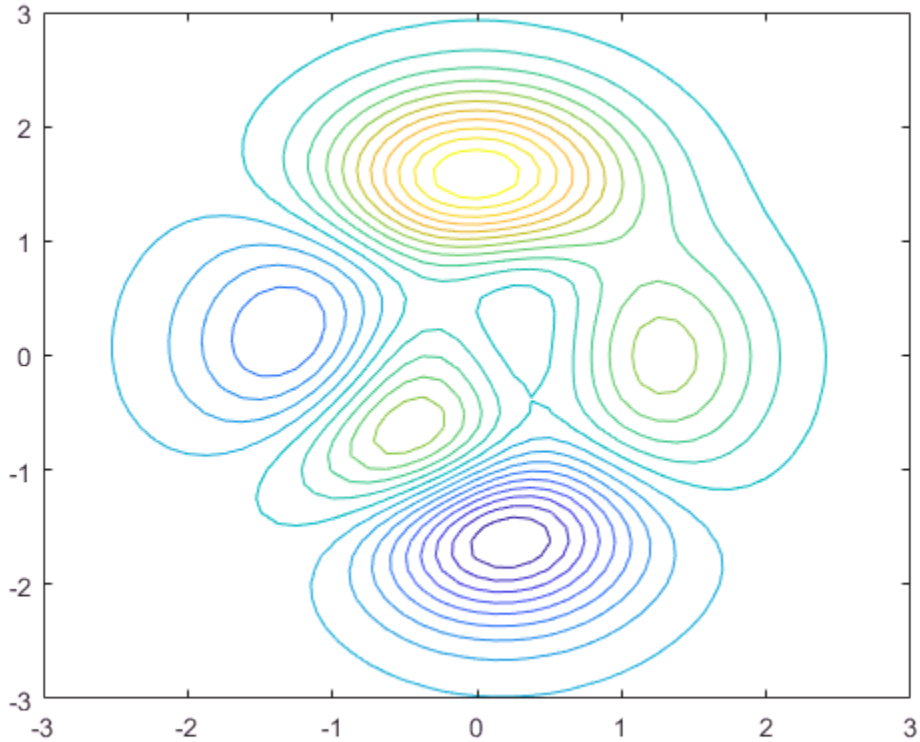

Display Contour Labels

Set up matrices `X`, `Y`, and `Z`. Create a contour plot and display the contour labels by setting the `ShowText` property to `on`.

```
x = -2:0.2:2;
y = -2:0.2:3;
[X,Y] = meshgrid(x,y);
Z = X.*exp(-X.^2-Y.^2);
```

```
figure
contour(X,Y,Z,'ShowText','on')
```

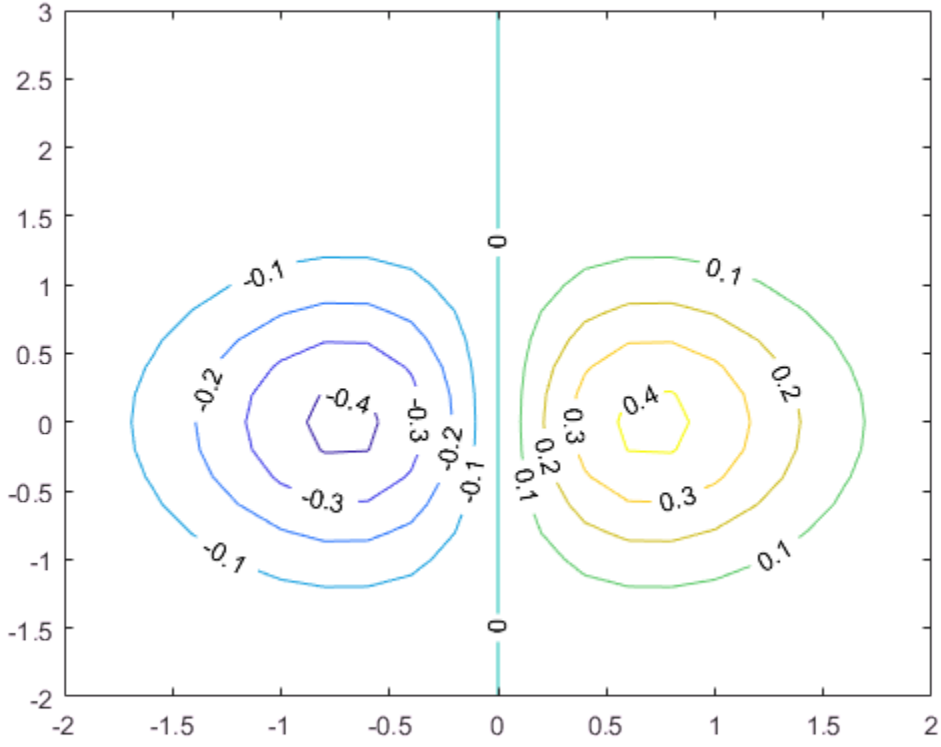

Display Single Contour Line

Create a contour plot of the `peaks` function and display only one contour level at `Z = 1`.

```
x = -3:0.125:3;
y = -3:0.125:3;
[X,Y] = meshgrid(x,y);
Z = peaks(X,Y);
v = [1,1];
```

```
figure
contour(X,Y,Z,v)
```

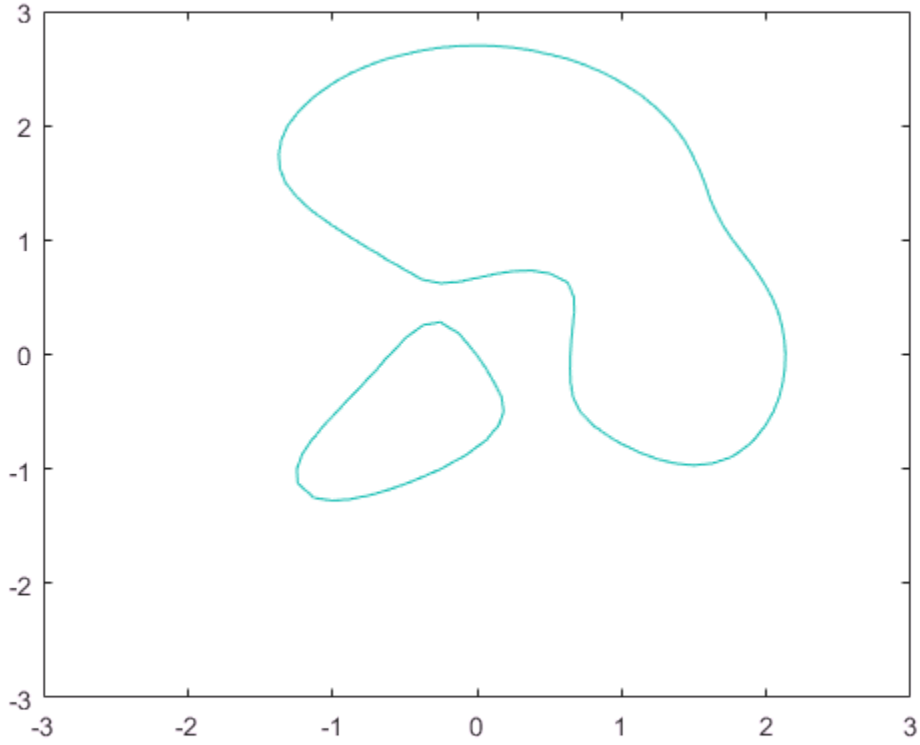

- "Label Contour Plot Levels"
- "Highlight Specific Contour Levels"

Tips

- The `contour` function cannot determine if there are discontinuities in the input data. Add `NaN` values to the data to prevent drawing the contour lines in those regions.

See Also

See Also

Functions

`clabel` | `contour3` | `contourc` | `contourf` | `quiver`

Properties

Contour Properties | Text Properties

Topics

"Label Contour Plot Levels"
"Highlight Specific Contour Levels"

Introduced before R2006a

contour3

3-D contour plot

Syntax

```
contour3(Z)
contour3(Z,n)
contour3(Z,v)
contour3(X,Y,Z)
contour3(X,Y,Z,n)
contour3(X,Y,Z,v)
contour3(...,LineSpec)
contour3(...,Name,Value)
contour3(ax,...)
[C,h] = contour3(...)
```

Description

`contour3` creates a 3-D contour plot of a surface defined on a rectangular grid.

`contour3(Z)` draws a contour plot of matrix `Z` in a 3-D view. `Z` is interpreted as heights with respect to the *x*-*y* plane. `Z` must be at least a 2-by-2 matrix that contains at least two different values. The *x* values correspond to the column indices of `Z` and the *y* values correspond to the row indices of `Z`. The contour levels are chosen automatically.

`contour3(Z,n)` draws a contour plot of matrix `Z` with `n` contour levels in a 3-D view.

`contour3(Z,v)` draws a contour plot of matrix `Z` with contour lines at the values specified in vector `v`. The number of contour levels is equal to `length(v)`. Specifying the vector `v` sets the `LevelListMode` property to manual. To display a single contour line at a particular value, define `v` as a two-element vector with both elements equal to the desired contour level. For example, to draw a single contour of level `k`, use `contour3(Z, [k k])`.

`contour3(X,Y,Z)`, `contour3(X,Y,Z,n)`, and `contour3(X,Y,Z,v)` draw contour plots of `Z` using `X` and `Y` to determine the *x* and *y* values.

- If X and Y are vectors, then `length(X)` must equal `size(Z,2)` and `length(Y)` must equal `size(Z,1)`. The vectors must be strictly increasing or strictly decreasing and cannot contain any repeated values.
- If X and Y are matrices, then their sizes must equal the size of Z. Typically, you should set X and Y so that the columns are strictly increasing or strictly decreasing and the rows are uniform (or the rows are strictly increasing or strictly decreasing and the columns are uniform).

If X or Y is irregularly spaced, then `contour3` calculates contours using a regularly spaced contour grid, and then transforms the data to X or Y.

`contour3(...,LineSpec)` draws the contour lines using the line type and color specified by `LineSpec`. `contour3` ignores marker symbols.

`contour3(...,Name,Value)` specifies contour properties using one or more property name, property value pairs. `Name` is the property name and must appear inside single quotes (`''`). `Value` is the corresponding value. For example, `'LineWidth',2` sets the contour line width to 2. For a list of contour property names and values, see Contour Properties.

`contour3(ax,...)` plots into the axes specified by `ax` instead of into the current axes (`gca`).

`[C,h] = contour3(...)` returns the contour matrix `C` containing the data that defines the contour lines and the `Contour` object `h`. The `clabel` function uses the contour matrix to label the contour lines.

Examples

Create 3-D Contour Plot

Set up matrices X and Y using the `meshgrid` function. Plot 30 contours of matrix Z.

```
x = -2:0.25:2;
[X,Y] = meshgrid(x);
Z = X.*exp(-X.^2-Y.^2);
contour3(X,Y,Z,30)
```

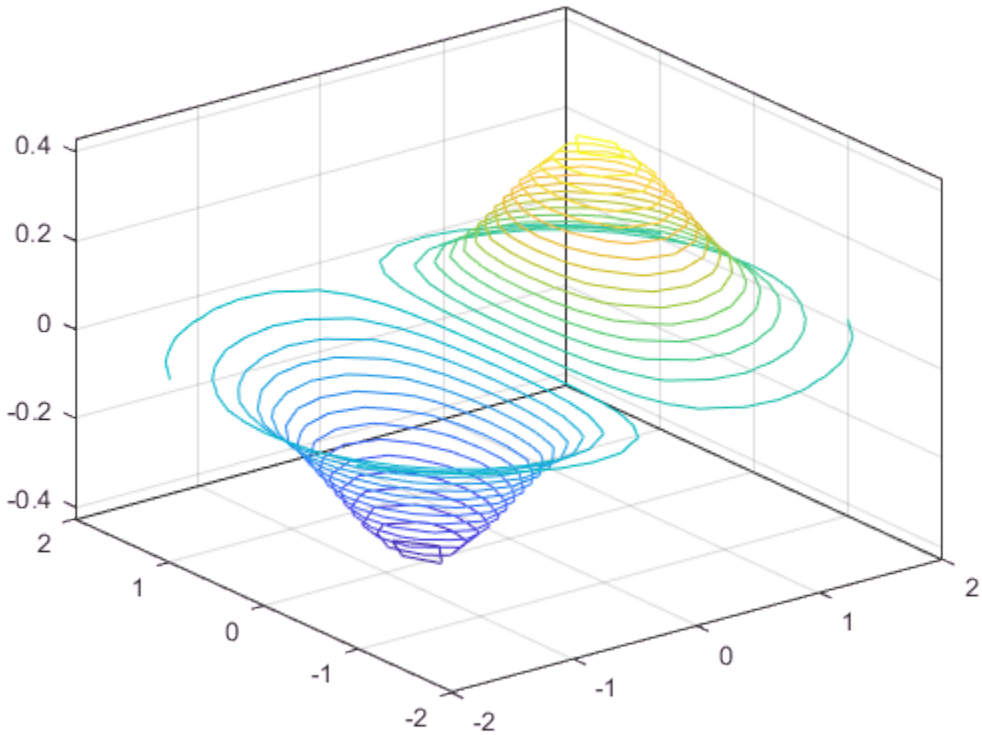

Tips

If you do not specify `LineSpec`, the functions `colormap` and `caxis` control the color.

Label the contour lines using `clabel`.

`contour3(...)` works the same as `contour(...)` except that the contours are drawn at their corresponding *z* values.

See Also

See Also

Functions
`contour` | `contourc` | `contourf` | `meshc` | `meshgrid` | `surfc`

Properties
Contour Properties

Introduced before R2006a

contourc

Low-level contour plot computation

Syntax

```
C = contourc(Z)
C = contourc(Z,n)
C = contourc(Z,v)
C = contourc(x,y,Z)
C = contourc(x,y,Z,n)
C = contourc(x,y,Z,v)
```

Description

`contourc` calculates the contour matrix `C` used by `contour`, `contour3`, and `contourf`. The values in `Z` determine the heights of the contour lines with respect to a plane. The contour calculations use a regularly spaced grid determined by the dimensions of `Z`.

`C = contourc(Z)` computes the contour matrix from data in matrix `Z`, where `Z` must be at least a 2-by-2 matrix. The contours are isolines in the units of `Z`. The number of contour lines and the corresponding values of the contour lines are chosen automatically.

`C = contourc(Z,n)` computes contours of matrix `Z` with `n` contour levels.

`C = contourc(Z,v)` computes contours of matrix `Z` with contour lines at the values specified in vector `v`. The length of `v` determines the number of contour levels. To compute a single contour of level `k`, use `contourc(Z,[k k])`.

`C = contourc(x,y,Z)`, `C = contourc(x,y,Z,n)`, and `C = contourc(x,y,Z,v)` compute contours of `Z` using vectors `x` and `y` to determine the *x* and *y* values. `x` and `y` must be monotonically increasing.

Tips

For more information on the contour matrix, see the ContourMatrix property for contour objects.

Specifying irregularly spaced `x` and `y` vectors is not the same as contouring irregularly spaced data. If `x` or `y` is irregularly spaced, `contourc` calculates contours using a regularly spaced contour grid, then transforms the data to `x` or `y`.

See Also

`clabel` | `contour` | `contour3` | `contourf`

Introduced before R2006a

contourf

Filled 2-D contour plot

Syntax

```
contourf(Z)
contourf(Z,n)
contourf(Z,v)
contourf(X,Y,Z)
contourf(X,Y,Z,n)
contourf(X,Y,Z,v)
contourf(...,LineSpec)
contourf(...,Name,Value)
contourf(ax,...)
[C,h] = contourf(...)
```

Description

A filled contour plot displays isolines calculated from matrix `Z` and fills the areas between the isolines using constant colors corresponding to the current figure's colormap.

`contourf(Z)` draws a filled contour plot of matrix `Z`, where `Z` is interpreted as heights with respect to the *x*-*y* plane. `Z` must be at least a 2-by-2 matrix that contains at least two different values. The *x* values correspond to the column indices of `Z` and the *y* values correspond to the row indices of `Z`. The contour levels are chosen automatically.

`contourf(Z,n)` draws a filled contour plot of matrix `Z` with `n` contour levels.

`contourf(Z,v)` draws a filled contour plot of matrix `Z` with contour lines at the data values specified in the monotonically increasing vector `v`. To display a single contour line at a particular value, define `v` as a two-element vector with both elements equal to the desired contour level. For example, to draw a single contour of level `k`, use `contourf(Z, [k k])`. Specifying the vector `v` sets the `LevelListMode` property to manual.

`contourf(X,Y,Z)`, `contourf(X,Y,Z,n)`, and `contourf(X,Y,Z,v)` draw filled contour plots of `Z` using `X` and `Y` to determine the *x* and *y* values.

- If X and Y are vectors, then length(X) must equal size(Z,2) and length(Y) must equal size(Z,1). The vectors must be strictly increasing or strictly decreasing and cannot contain any repeated values.
- If X and Y are matrices, then their sizes must equal the size of Z. Typically, you should set X and Y so that the columns are strictly increasing or strictly decreasing and the rows are uniform (or the rows are strictly increasing or strictly decreasing and the columns are uniform).

If X or Y is irregularly spaced, then contourf calculates contours using a regularly spaced contour grid, and then transforms the data to X or Y.

contourf(...,LineSpec) draws the contour lines using the line type and color specified by LineSpec. contourf ignores marker symbols.

contourf(...,Name,Value) specifies contour properties using one or more property name, property value pairs. Name is the property name and must appear inside single quotes ('). Value is the corresponding value. For example, 'LineWidth',2 sets the contour line width to 2. For a list of contour property names and values, see Contour Properties.

contourf(ax,...) plots into the axes specified by ax instead of into the current axes (gca).

[C,h] = contourf(...) returns the contour matrix C containing the data that defines the contour lines and a Contour object h. The ContourMatrix property for the Contour object also contains the contour matrix. The clabel function uses the contour matrix to label the contour lines.

Examples

Create Filled Contour Plot

Use the peaks function to define z as a 20-by-20 matrix. Create a filled contour plot of z with 10 contour lines.

```
Z = peaks(20);
contourf(Z,10)
```

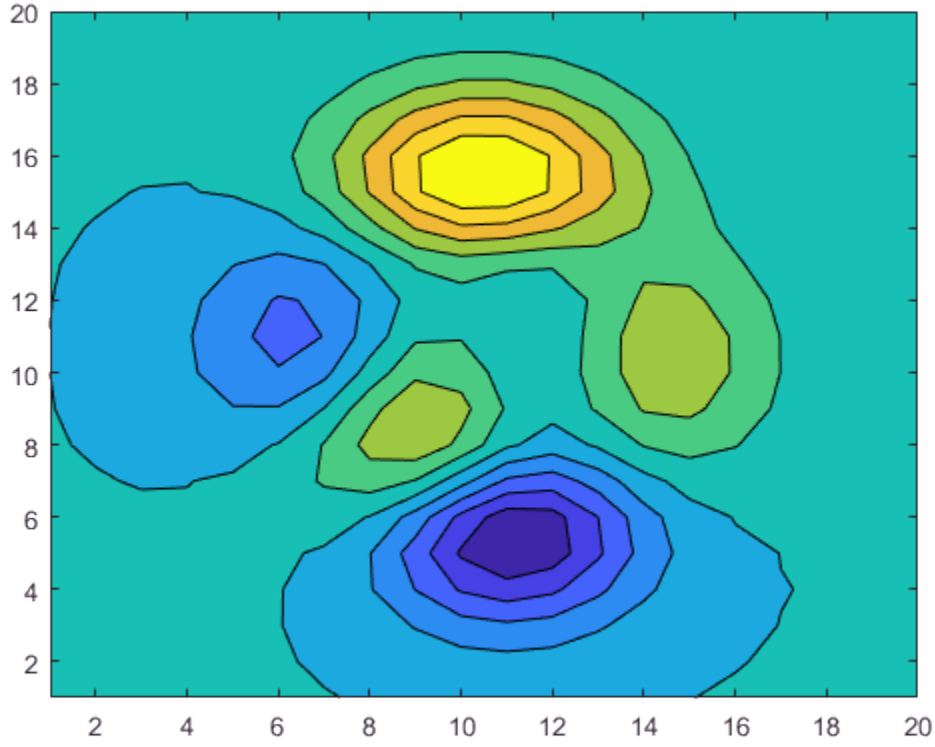

Tips

NaN values in Z leave white holes with black borders in the contour plot.

See Also

See Also

Functions

clabel | contour | contour3 | contourc | quiver

Properties

Contour Properties

Topics

"Change Fill Colors for Contour Plot"

Introduced before R2006a

Contour Properties

Control contour chart appearance and behavior

Description

`Contour` properties control the appearance and behavior of `Contour` objects. By changing property values, you can modify certain aspects of the contour chart.

Starting in R2014b, you can use dot notation to query and set properties.

```
[C,h] = contour(...);
w = h.LineWidth;
h.LineWidth = 2;
```

If you are using an earlier release, use the `get` and `set` functions instead.

Lines

`LineColor` — Color of contour lines
`'flat'` (default) | `'none'` | RGB triplet | character vector of color name

Color of contour lines, specified as one of these values:

- `'flat'` — Use a different color for each contour line, determined by its contour value, the colormap, and the scaling of data values into the colormap. For more information on color scaling, see `caxis`.
- `'none'` — Do not draw the contour lines.
- RGB triplet or character vector of color name — Use the same color for all contour lines.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`

Long Name	Short Name	RGB Triplet
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`LineStyle` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Width of contour lines
0.5 (default) | positive value

Width of contour lines, specified as a positive value in points. One point equals 1/72 inch.

Example: 2

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Contour Levels

`LevelList` — Contour levels
empty matrix (default) | vector of z values

Contour levels, specified as a vector of z values. By default, the `contour` function chooses values that span the range of values in the `ZData` property.

Setting this property sets the associated mode property to manual.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`LevelListMode` — Selection mode for `LevelList`

`'auto'` (default) | `'manual'`

Selection mode for the `LevelList`, specified as one of these values:

- `'auto'` — Determine the values based on the `ZData` values.
- `'manual'` — Use manually specified values. To specify the values, set the `LevelList` property. When the mode is manual, the `contour` function does not change the values as you change `ZData`.

`LevelStep` — Spacing between contour lines

`0` (default) | scalar numeric value

Spacing between contour lines, specified as a scalar numeric value. For example, specify a value of 2 to draw contour lines at increments of 2. The `contour` function determines the contour interval based on the `ZData` values.

Setting this property sets the associated mode property to manual.

Example: `3.4`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`LevelStepMode` — Selection mode for `LevelStep`

`'auto'` (default) | `'manual'`

Selection mode for the `LevelStep`, specified as one of these values:

- `'auto'` — Determine the value based on the `ZData` values.
- `'manual'` — Use a manually specified value. To specify the value, set the `LevelStep` property. When the mode is manual, the `contour` function does not change the value as you change `ZData`.

Contour Labels

`ShowText` — Contour line labels

`'off'` (default) | `'on'`

Contour line labels, specified as one of these values:

- `'off'` — Do not label the contour lines.
- `'on'` — Display text labels on each contour line indicating the contour value.

`LabelSpacing` — Spacing between contour line labels

144 (default) | numeric scalar

Spacing between contour line labels, specified as a numeric scalar in point units. One point equals 1/72 inch. You must set the `ShowText` property to `'on'` for the `LabelSpacing` property to have an effect.

If you use the `clabel` function to display the labels, then the `LabelSpacing` property has no effect. The contour plot contains a single label per line instead.

Example: 36

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`TextList` — Contour lines to label

empty matrix (default) | vector of real values

Contour lines to label, specified as a vector of real values.

Setting this property sets the associated mode property to manual.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`TextListMode` — Selection mode for `TextList`

`'auto'` (default) | `'manual'`

Selection mode for the `TextList`, specified as one of these values:

- `'auto'` — Use values equal to the values of the `LevelList` property. The contour plot includes a text label for each line.
- `'manual'` — Use manually specified values. Specify the values by setting the `TextList` property.

`TextStep` — Interval between labeled contour lines

0 (default) | scalar numeric value

Interval between labeled contour lines, specified as a scalar numeric value. By default, the contour plot includes a label for every contour line when the `ShowText` property is set to `'on'`.

Setting this property sets the associated mode property to manual.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`TextStepMode` — Selection mode for `TextStep`

`'auto'` (default) | `'manual'`

Selection mode for the `TextStep`, specified as one of these values:

- `'auto'` — Determine value based on the `ZData` values. If the `ShowText` property is set to `'on'`, then the `contour` function labels every contour line.
- `'manual'` — Use a manually specified value. To specify the value, set the `TextStep` property.

Filled Contours

`Fill` — Fill between contour lines

`'off'` (default) | `'on'`

Fill between contour lines, specified as one of these values:

- `'off'` — Do not fill the spaces between contour lines with a color. This is the default value when you create the contour chart using the `contour` or `contour3` functions.
- `'on'` — Fill the spaces between contour lines with color. This is the default value when you create the contour chart using the `contourf` function.

Contour Matrix

`ContourMatrix` — Contour line definitions

[ ] (default) | two-row matrix

This property is read-only.

Contour line definitions, returned as a two-row matrix. Each contour line in the plot has an associated definition. If there are a total of N contour lines in the plot, then the contour matrix consists of N definitions:

```
C = [C(1) C(2)...C(k)...C(N)]
```

Each contour line definition follows this pattern:

```
C(k) = [level   x(1) x(2)...
        numxy   y(1) y(2)... ]
```

The first entry, `level`, indicates the contour level where the contour line is drawn. Beneath the contour level is the number of (*x*,*y*) vertices that define the contour line. The remaining columns contain the data for each of the vertices. If the first and last vertices are the same, then the contour line is a closed loop. If a particular contour level has multiple contour lines in the graph, then the matrix contains a separate definition for each line.

Example

Create a contour plot of values from the `peaks` function.

```
[X,Y,Z] = peaks(3);
[C,h] = contour(X,Y,Z);
```

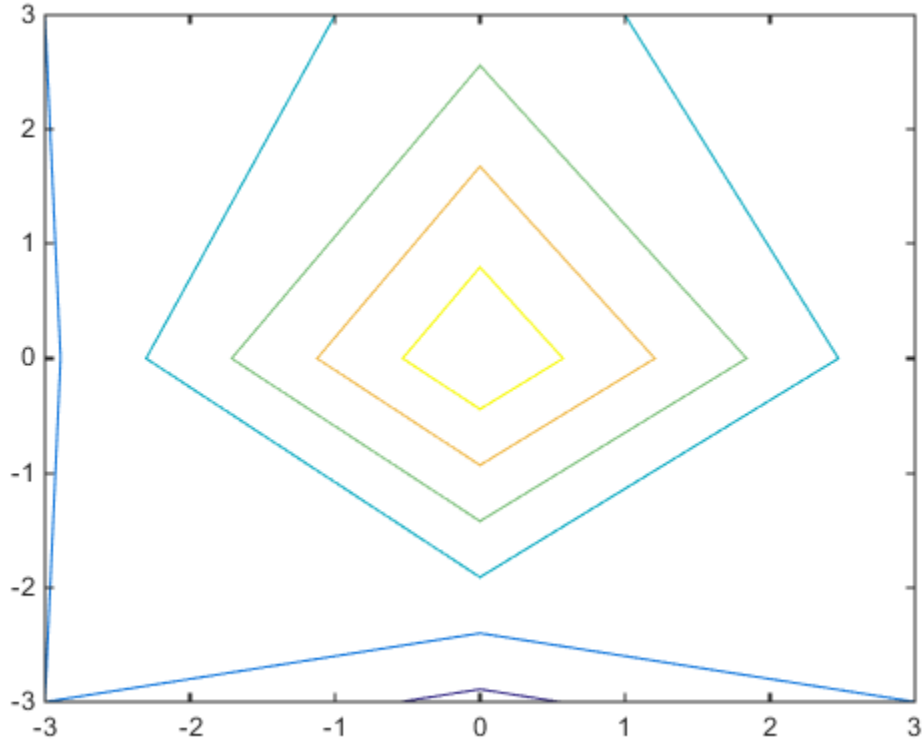

Access the contour matrix using either the output argument `C` or the `ContourMatrix` property of the `Contour` object (`h.ContourMatrix`). The contour matrix contains definitions for each of the seven contour lines. The circles in this matrix show the beginnings of the contour line definitions.

```
C =

  Columns 1 through 8

   -0.2000   -0.5504         0    0.5506         0   -2.9992         0    3.0000
    3.0000   -3.0000   -2.8900   -3.0000    3.0000   -3.0000   -2.4006   -2.9995

  Columns 9 through 16

         0   -3.0000   -2.8924   -3.0000    0.2000   -0.9992   -2.3027         0
    3.0000    2.9974         0   -2.9945    5.0000    3.0000         0   -1.9112

  Columns 17 through 24

    2.4719    0.9993    0.4000   -1.7130         0    1.8389         0   -1.7130
         0    3.0000    5.0000         0   -1.4218         0    2.5590         0

  Columns 25 through 32

    0.6000   -1.1234         0    1.2059         0   -1.1234    0.8000   -0.5337
    5.0000         0   -0.9324         0    1.6781         0    5.0000         0

  Columns 33 through 36

         0    0.5729         0   -0.5337
   -0.4429         0    0.7972         0
```

The first definition in the matrix indicates that there is a contour line drawn at the -0.2 level , consisting of the three vertices `(-0.5504,-3)`, `(0,-2.89)`, and `(0.5506,-3)`. Since the first and last vertices are not the same, the contour line is not a closed loop. The last definition indicates that there is a closed loop at the 0.8 level.

Data

`XData` — x values

[ ] (default) | vector or matrix

x values, specified as a vector or matrix.

- If `XData` is a vector, then `length(XData)` must equal `size(ZData,2)` and `YData` must also be a vector. The `XData` values must be strictly increasing or strictly decreasing and cannot contain any duplicates.

- If `XData` is a matrix, then `size(XData)` and `size(YData)` must equal `size(ZData)`. Typically, you should set the `XData` values so that the columns are strictly increasing or strictly decreasing and the rows are uniform (or the rows are strictly increasing or strictly decreasing and the columns are uniform).

Setting this property sets the associated mode property to manual.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`YData` — y values

[ ] (default) | vector or matrix

y values, specified as a vector or matrix.

- If `YData` is a vector, then `length(YData)` must equal `size(ZData,1)` and `XData` must also be a vector. The `XData` values must be strictly increasing or strictly decreasing and cannot contain any duplicates.
- If `YData` is a matrix, then `size(XData)` and `size(YData)` must equal `size(ZData)`. Typically, you should set the `YData` values so that the columns are strictly increasing or strictly decreasing and the rows are uniform (or the rows are strictly increasing or strictly decreasing and the columns are uniform).

Setting this property sets the associated mode property to manual.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`ZData` — Data that defines surface to contour

[ ] (default) | matrix

Data that defines the surface to contour, specified as a matrix. `ZData` must be at least a 2-by-2 matrix.

Setting this property sets the associated mode property to manual.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`XDataSource` — Variable linked to `XData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `XData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `XData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `XData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'x'`

`YDataSource` — Variable linked to `YData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `YData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `YData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `YData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'y'`

`ZDataSource` — Variable linked to `ZData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `ZData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `ZData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `ZData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'z'`

`XDataMode` — Selection mode for `XData`

`'auto'` (default) | `'manual'`

Selection mode for the `XData`, specified as one of these values:

- `'auto'` — Set the `XData` using the column indices of `ZData`.
- `'manual'` — Use manually specified values. To specify the values, set the `XData` property directly, or specify the input argument `X` to the `contour`, `contourf`, or `contour3` function.

`YDataMode` — Selection mode for `XData`

`'auto'` (default) | `'manual'`

Selection mode for the `YData`, specified as one of these values:

- `'auto'` — Set the `YData` using the row indices of `ZData`.
- `'manual'` — Use manually specified values. To specify the values, set the `YData` property directly, or specify the input argument `Y` to the `contour`, `contourf`, or `contour3` function.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.

- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.

- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'contour'`

This property is read-only.

Type of graphics object, returned as `'contour'`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

DisplayName — Text used for legend label

'' (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form 'dataN'. The legend does not display until you call the legend command.

Example: 'Label Text'

Annotation — Control for including or excluding object from legend

Annotation object

This property is read-only.

Control for including or excluding the object from a legend, returned as an Annotation object. Set the underlying IconDisplayStyle property to one of these values:

- 'on' — Include the object in the legend (default).
- 'off' — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the legend function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

Parent — Parent

Axes object | Group object | Transform object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the `Contour` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Contour` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Contour` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Contour` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Contour` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Contour` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`HitTestArea` — (removed) Extents of clickable area

`'off'` (default) | `'on'`

Note: `HitTestArea` has been removed. Use `PickableParts` instead.

Extents of clickable area, specified as one of these values:

- `'off'` — Click the object to select it. This is the default value.
- `'on'` — Click anywhere within the extent of the object to select it, that is, anywhere within the rectangle that encloses the object.

Example: `'off'`

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Contour` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Contour` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments

- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`contour` | `contour3` | `contourf` | `meshc` | `surfc`

Topics
"Access Property Values"
"Graphics Object Properties"

contourslice

Draw contours in volume slice planes



Syntax

```
contourslice(X,Y,Z,V,Sx,Sy,Sz)
contourslice(X,Y,Z,V,Xi,Yi,Zi)
contourslice(V,Sx,Sy,Sz)
contourslice(V,Xi,Yi,Zi)
contourslice(...,n)
contourslice(...,cvals)
contourslice(...,[cv cv])
contourslice(...,'method')
contourslice(axes_handle,...)
h = contourslice(...)
```

Description

`contourslice(X,Y,Z,V,Sx,Sy,Sz)` draws contours in the *x*-, *y*-, and *z*-axis aligned planes at the points in the vectors `Sx`, `Sy`, `Sz`. The arrays `X`, `Y`, and `Z` define the coordinates for the volume `V` and must be monotonic and represent a Cartesian, axis-aligned grid (such as the data produced by `meshgrid`). The color at each contour is determined by the volume `V`, which must be an m-by-n-by-p volume array.

`contourslice(X,Y,Z,V,Xi,Yi,Zi)` draws contours through the volume `V` along the surface defined by the 2-D arrays `Xi,Yi,Zi`. The surface should lie within the bounds of the volume.

`contourslice(V,Sx,Sy,Sz)` and `contourslice(V,Xi,Yi,Zi)` (omitting the `X`, `Y`, and `Z` arguments) assume `[X,Y,Z] = meshgrid(1:n,1:m,1:p)`, where `[m,n,p]= size(v)`.

`contourslice(...,n)` draws `n` contour lines per plane, overriding the automatic value.

`contourslice(...,cvals)` draws `length(cval)` contour lines per plane at the values specified in vector `cvals`.

`contourslice(...,[cv cv])` computes a single contour per plane at the level `cv`.

`contourslice(...,'method')` specifies the interpolation method to use. *`method`* can be `linear`, `cubic`, or `nearest`. `nearest` is the default except when the contours are being drawn along the surface defined by `Xi`, `Yi`, `Zi`, in which case `linear` is the default. (See `interp3` for a discussion of these interpolation methods.)

`contourslice(axes_handle,...)` plots into the axes with the handle `axes_handle` instead of into the current axes (`gca`).

`h = contourslice(...)` returns a vector of handles to `patch` objects that are used to implement the contour lines.

Examples

Contour Slices of Fluid Flow

Store the matrices `X`, `Y`, `Z`, and `V` from the `flow` data set.

```
[X,Y,Z,V] = flow;
```

Create nine contour plots in the y-z plane, no plots in the x-z plane, and one plot in the x-y plane by specifying `Sx` as a vector of nine elements, `Sy` as an empty vector, and `Sz` as a scalar.

```
Sx = 1:9;
Sy = [];
Sz = 0;
```

Draw 10 contour lines between -8 and 2 by specifying `cvals` as a 10-element vector of linearly spaced values between -8 and 2.

```
cvals = linspace(-8,2,10);
```

Create the contour slice plots and set the axis limits. Set the data aspect ratio, change the camera position, and display the black box outline.

```
figure
```

```
contourslice(X,Y,Z,V,Sx,Sy,Sz,cvals)

axis([0,10,-3,3,-3,3])
daspect([1,1,1])
campos([0,-20,7])
box on
```

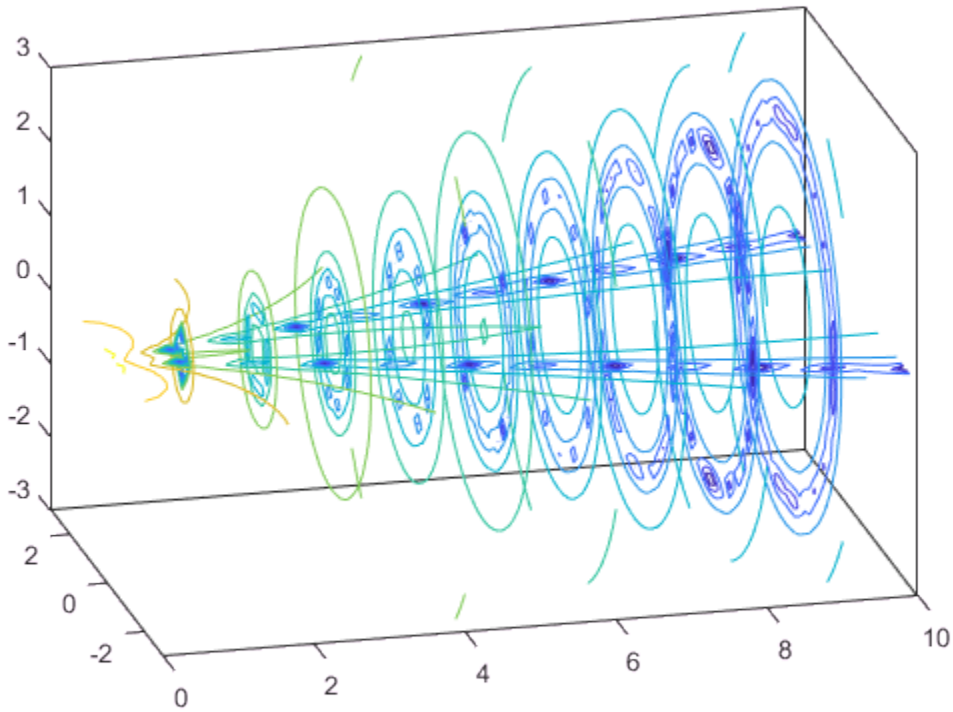

Contour Slices Along Spherical Surface

Set up matrices X, Y, and Z using the `meshgrid` function.

```
x = -2:0.2:2;
y = -2:0.25:2;
z = -2:0.16:2;
```

```
[X,Y,Z] = meshgrid(x,y,z);
```

Use X, Y, and Z to define V as a matrix of volume data.

```
V = X.*exp(-X.^2-Y.^2-Z.^2);
```

Return matrices Xi, Yi, and Zi from the sphere function.

```
[Xi,Yi,Zi] = sphere;
```

Draw contours through the volume V along the surface defined by Xi, Yi, and Zi. Change the plot view to a 3-D view.

```
contourslice(X,Y,Z,V,Xi,Yi,Zi)
view(3)
```

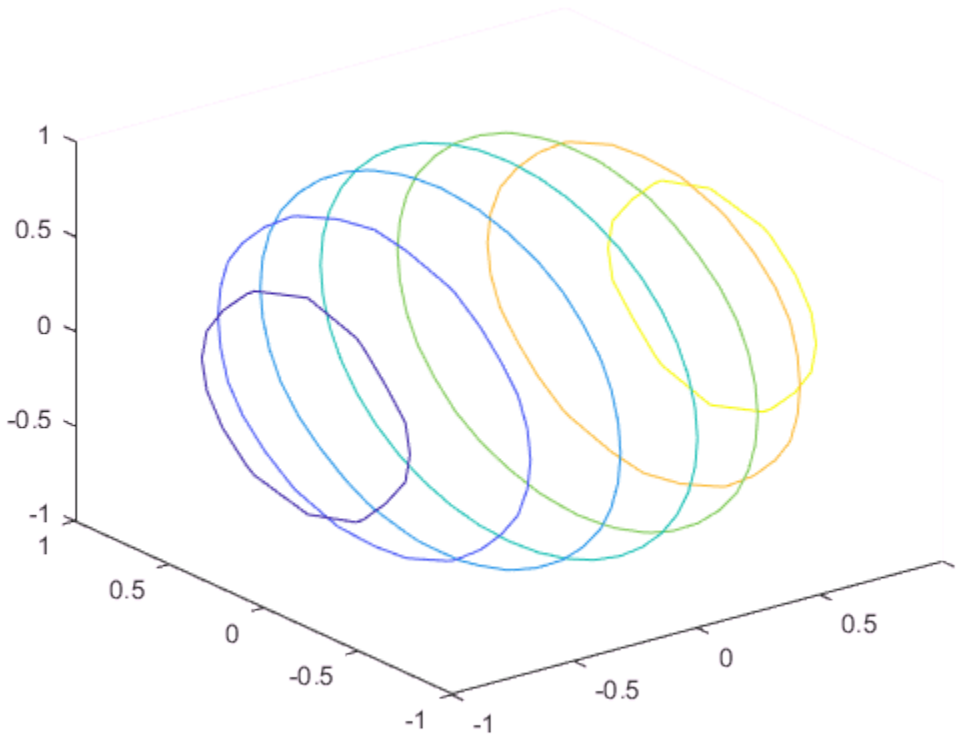

See Also

`isosurface` | `slice` | `smooth3` | `subvolume` | `reducevolume`

Introduced before R2006a

matlab.unittest.constraints

Summary of classes in MATLAB Constraints Interface

Description

Constraints specify business rules against which to qualify a calculated value. Use constraints in conjunction with the `matlab.unittest.qualifications` qualification methods `assertThat`, `assumeThat`, `fatalAssertThat`, or `verifyThat`. Constraints determine whether or not a calculated (actual) value satisfies the constraint. Constraints also provide diagnostics. The `matlab.unittest.constraints` package consists of the following classes.

- "Constraint Implementations" on page 1-1669
- "Actual Value Proxies" on page 1-1673
- "Tolerances" on page 1-1673
- "Comparators" on page 1-1673

Constraint Implementations

Fundamental Constraint-Related Interfaces

matlab.unittest.constraints.BooleanConstraint	Interface class for boolean combinations of constraints
matlab.unittest.constraints.Constraint	Fundamental interface class for comparisons

General Purpose

matlab.unittest.constraints.Eventually	Poll for value to asynchronously satisfy constraint
matlab.unittest.constraints.HasField	Constraint specifying structure containing particular field

matlab.unittest.constraints.IsAnything
: Constraint specifying any value

matlab.unittest.constraints.IsFalse
: Constraint specifying false value

matlab.unittest.constraints.IsEqualTo
: General constraint to compare for equality

matlab.unittest.constraints.IsSameHandleAs
: Constraint specifying handle instance same as another

matlab.unittest.constraints.IsTrue
: Constraint specifying true value

matlab.unittest.constraints.ReturnsTrue
: Constraint specifying function handle that returns true

Errors and Warnings

matlab.unittest.constraints.IssuesNoWarnings
: Constraint specifying function that issues no warnings

matlab.unittest.constraints.IssuesWarnings
: Constraint specifying function that issues expected warning profile

matlab.unittest.constraints.Throws
: Constraint specifying function handle that throws MException

Inequalities

matlab.unittest.constraints.IsGreaterThan
: Constraint specifying value greater than another value

matlab.unittest.constraints.IsGreaterThanOrEqualTo
: Constraint specifying value greater than or equal to another value

matlab.unittest.constraints.IsLessThan
: Constraint specifying value less than another value

matlab.unittest.constraints.IsLessThanOrEqualTo
: Constraint specifying value less than or equal to another value

Array Size

matlab.unittest.constraints.HasElementCount
: Constraint specifying expected number of elements

matlab.unittest.constraints.HasLength
: Constraint specifying expected length of array

matlab.unittest.constraints.HasSize
: Constraint specifying expected size of array

matlab.unittest.constraints.IsEmpty
: Constraint specifying empty value

matlab.unittest.constraints.IsScalar
: Constraint specifying scalar value

Type

matlab.unittest.constraints.IsInstanceOf
: Constraint specifying inclusion in given class hierarchy

matlab.unittest.constraints.IsOfClass
: Constraint specifying class type

Strings

matlab.unittest.constraints.ContainsSubstring
: Constraint specifying string containing substring

matlab.unittest.constraints.EndsWithSubstring
: Constraint specifying string ending with substring

matlab.unittest.constraints.IsSubstringOf
: Constraint specifying substring of another string

matlab.unittest.constraints.Matches
: Constraint specifying string matches regular expression

matlab.unittest.constraints.StartsWithSubstring
: Constraint specifying string starting with substring

Finiteness

matlab.unittest.constraints.HasInf
: Constraint specifying array containing any infinite value

matlab.unittest.constraints.HasNaN
: Constraint specifying array containing NaN value

matlab.unittest.constraints.IsFinite
: Constraint specifying finite value

Numeric Attributes

matlab.unittest.constraints.IsReal
: Constraint specifying real valued array

matlab.unittest.constraints.IsSparse
: Constraint specifying sparse array

Set

matlab.unittest.constraints.HasUniqueElements
: Constraint specifying set contains unique elements

matlab.unittest.constraints.IsSubsetOf
: Constraint specifying actual set is subset of expected set

matlab.unittest.constraints.IsSupersetOf
: Constraint specifying actual set is superset of expected set

Actual Value Proxies

matlab.unittest.constraints.AnyCellOf
: Test if any element of cell array meets constraint

matlab.unittest.constraints.AnyElementOf
: Test if any element of array meets constraint

matlab.unittest.constraints.EveryCellOf
: Test if all elements of cell array meet constraint

matlab.unittest.constraints.EveryElementOf
: Test if all elements of array meet constraint

Tolerances

matlab.unittest.constraints.AbsoluteTolerance
: Absolute numeric tolerance

matlab.unittest.constraints.RelativeTolerance
: Relative numeric tolerance

matlab.unittest.constraints.Tolerance
: Abstract interface class for tolerances

Comparators

matlab.unittest.constraints.CellComparator
: Comparator for cell arrays

matlab.unittest.constraints.LogicalComparator
: Comparator for two logical values

matlab.unittest.constraints.NumericComparator
: Comparator for numeric data types

matlab.unittest.constraints.ObjectComparator
: Comparator for MATLAB or Java objects

matlab.unittest.constraints.PublicPropertyComparator
: Comparator for public properties of MATLAB objects

matlab.unittest.constraints.StringComparator
: Comparator for two strings or character arrays

matlab.unittest.constraints.StructComparator
: Comparator for MATLAB structure arrays

matlab.unittest.constraints.TableComparator
: Comparator for MATLAB tables

matlab.unittest.constraints.AbsoluteTolerance class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Tolerance

Absolute numeric tolerance

Description

This numeric `Tolerance` assesses the magnitude of the difference between actual and expected values. For the tolerance to be satisfied, `abs(expVal - actVal) <= absTol` must be true.

Construction

`AbsoluteTolerance(tolVals)` creates an absolute tolerance object that assesses the magnitude of the difference between the actual and expected values.

The data types of the inputs to the `AbsoluteTolerance` constructor determines which data types the tolerance supports. For example, `AbsoluteTolerance(10*eps)` constructs an `AbsoluteTolerance` for comparing double-precision numeric arrays, while `AbsoluteTolerance(int8(2))` constructs an `AbsoluteTolerance` for comparing numeric arrays of type `int8`. If the actual and expected values being compared contain more than one numeric data type, the tolerance only applies to the data types specified by the values passed into the constructor.

To specify different tolerance values for different data types, you can pass multiple tolerance values to the constructor. For example, `AbsoluteTolerance(10*eps, 10*eps('single'), int8(1))` constructs an `AbsoluteTolerance` object applies the following absolute tolerances:

- `10*eps` applies an absolute tolerance of `10*eps` for double-precision numeric arrays.
- `10*eps('single')` applies an absolute tolerance of `10*eps` for single-precision numeric arrays.
- `int8(1)` applies an absolute tolerance of `1` for numeric arrays of type `int8`.

You can specify more than one tolerance for a particular data type by combining tolerances with the & and | operators. To combine two tolerances, the sizes of the tolerance values for each data type must be compatible.

Input Arguments

`tolVals`

Numeric tolerances, specified as a comma-separated list of numeric arrays. Each input argument contains the tolerance specification for a particular data type. Each numeric array can be a scalar or array the same size as the actual and expected values.

Default:

Properties

`Values`

Numeric tolerances, specified by the `tolVals` input argument

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test with Absolute Tolerance

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.AbsoluteTolerance

testCase = TestCase.forInteractiveUse;
```

Assert that the difference between an actual value, `4.1`, and an expected value, `4.5`, is less than `0.5`.

```
testCase.assertThat(4.1, IsEqualTo(4.5, ...
    'Within', AbsoluteTolerance(0.5)))
```

```
Interactive assertion passed.
```

Specify Absolute Tolerance for Different Data Types

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.AbsoluteTolerance

testCase = TestCase.forInteractiveUse;
```

Create the following actual and expected cell arrays.

```
act = {'abc', 123, single(106), int8([1, 2, 3])};
exp = {'abc', 122, single(105), int8([2, 4, 6])};
```

Test whether the arrays satisfy the `AbsoluteTolerance` constraint within a value of `2`.

```
testCase.verifyThat(act, IsEqualTo(exp, ...
    'Within', AbsoluteTolerance(2)))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> Path to failure: <Value>{3}
    --> NumericComparator failed.
        --> The values are not equal using "isequaln".
        --> The tolerance was ignored. The tolerance as specified does not support comp
        --> Failure table:
                    Actual    Expected    Error    RelativeError
                    ______    ________    _____    _____________

                    106       105         1        0.00952381

        Actual single:
```

```
                106
        Expected single:
                105

Actual cell:
        'abc'    [123]    [106]    [1×3 int8]
Expected cell:
        'abc'    [122]    [105]    [1×3 int8]
```

The test fails because the tolerance is only applied to the `double` data type.

Create a tolerance object that specifies different tolerances for different data types.

```
tolObj = AbsoluteTolerance(2, single(3), int8([2, 3, 5]));
```

A tolerance of `2` is a applied to `double` valued data. A tolerance of `3` is applied to `single` valued data. A tolerance of `[2 3 5]` is applied to corresponding array elements of `int8` valued data.

Verify that the expected and actual values satisfy the `AbsoluteTolerance` constraint.

```
testCase.verifyThat(act, IsEqualTo(exp, 'Within', tolObj))
```

```
Interactive verification passed.
```

Combine Absolute and Relative Tolerances

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.AbsoluteTolerance
import matlab.unittest.constraints.RelativeTolerance

testCase = TestCase.forInteractiveUse;
```

Define an actual value approximation for `pi`.

```
act = 3.14;
```

Construct a tolerance object to test that the difference between the actual and expected values is within `0.001` and within `0.25%`.

```
tolObj = AbsoluteTolerance(0.001) & RelativeTolerance(0.0025);
```

Verify that the actual value is within the tolerance of the expected value of `pi`.

```
testCase.verifyThat(act, IsEqualTo(pi, 'Within', tolObj))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> NumericComparator failed.
    --> The values are not equal using "isequaln".
    --> AndTolerance failed.
        --> AbsoluteTolerance failed.
            --> The error was not within absolute tolerance.
        --> RelativeTolerance passed.
            --> The error was within relative tolerance.
        --> Failure table:
                    Actual        Expected               Error                RelativeE
                    ______    _________________    ____________________    _____________

                    3.14      3.14159265358979    -0.00159265358979299    -0.000506957

    Actual double:
           3.140000000000000
    Expected double:
           3.141592653589793
```

The actual value does not satisfy the `AbsoluteTolerance` constraint.

Construct a constraint that is satisfied if the values are within `0.001` or `0.25%`, and then retest the actual value.

```
tolObj = AbsoluteTolerance(0.001) | RelativeTolerance(0.0025);
testCase.verifyThat(act, IsEqualTo(pi, 'Within', tolObj))
```

```
Interactive verification passed.
```

Combine Absolute and Relative Tolerances to Test Small and Large Values

Combine tolerances so when you test the equality of values, an absolute (floor) tolerance dominates when the values are near zero, and a relative tolerance dominates for larger values.

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.AbsoluteTolerance
import matlab.unittest.constraints.RelativeTolerance

testCase = TestCase.forInteractiveUse;
```

Define two structures containing electromagnetic properties of a vacuum. One structure, `approxVacuumProps`, contains approximate values for the permeability and speed of light in a vacuum.

```
approxVacuumProps.Permeability = 1.2566e-06; % Approximate
approxVacuumProps.Permitivity = 8.854187817*10^-12;
approxVacuumProps.LightSpeed = 2.9979e+08; % Approximate

baselineVacuumProps.Permeability = 4*pi*10^-7;
baselineVacuumProps.Permitivity = 8.854187817*10^-12;
baselineVacuumProps.LightSpeed = 1/sqrt(...
    baselineVacuumProps.Permeability*baselineVacuumProps.Permitivity);
```

Test that the relative difference between the approximate and baseline values is within `eps*1e11`.

```
testCase.verifyThat(approxVacuumProps, IsEqualTo(baselineVacuumProps, ...
    'Within', RelativeTolerance(eps*1e11)))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> Path to failure: <Value>.Permeability
    --> NumericComparator failed.
        --> The values are not equal using "isequaln".
        --> RelativeTolerance failed.
            --> The error was not within relative tolerance.
            --> Failure table:
                          Actual            Expected                  Error
                        __________    ____________________    ______________________

                        1.2566e-06    1.25663706143592e-06    -3.70614359173257e-11

        Actual double:
                 1.256600000000000e-06
```

```
        Expected double:
                 1.256637061435917e-06

Actual struct:
        Permeability: 1.256600000000000e-06
         Permitivity: 8.854187816999999e-12
          LightSpeed: 299790000
Expected struct:
        Permeability: 1.256637061435917e-06
         Permitivity: 8.854187816999999e-12
          LightSpeed: 2.997924580105029e+08
```

The test fails because the relative difference in the permeabilities is not within the tolerance. The difference between the two values is small, but the numbers are close to zero, so the difference relative to their size is not small enough to satisfy the tolerance.

Construct a tolerance object to test that the absolute difference between the approximate and baseline values is within `1e-4`.

```
testCase.verifyThat(approxVacuumProps, IsEqualTo(baselineVacuumProps, ...
    'Within', AbsoluteTolerance(1e-4)))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> Path to failure: <Value>.LightSpeed
    --> NumericComparator failed.
        --> The values are not equal using "isequaln".
        --> AbsoluteTolerance failed.
            --> The error was not within absolute tolerance.
            --> Failure table:
                         Actual          Expected              Error             Relat
                        _________    _________________    __________________    _________

                        299790000    299792458.010503    -2458.01050287485    -8.199040

        Actual double:
               299790000
        Expected double:
                 2.997924580105029e+08

Actual struct:
```

```
        Permeability: 1.256600000000000e-06
         Permitivity: 8.854187816999999e-12
          LightSpeed: 299790000
Expected struct:
        Permeability: 1.256637061435917e-06
         Permitivity: 8.854187816999999e-12
          LightSpeed: 2.997924580105029e+08
```

The test fails because the absolute difference in the speed of light is not within the tolerance. The difference between the two values is small relative to their size, but too large to satisfy the tolerance.

Construct a logical disjunction of tolerance objects to test that the absolute difference between the approximate and baseline values is within `1e-4` or the relative difference is within `eps*1e11`. The test uses this tolerance so permeability values that are close to zero satisfy the absolute (floor) tolerance, and speed of light values that are large, satisfy the relative tolerance.

```
testCase.verifyThat(approxVacuumProps, IsEqualTo(baselineVacuumProps, ...
    'Within', RelativeTolerance(eps*1e11)| AbsoluteTolerance(1e-4)))
```

```
Interactive verification passed.
```

See Also

See Also

matlab.unittest.constraints.RelativeTolerance | matlab.unittest.constraints.IsEqualTo

Introduced in R2013a

matlab.unittest.constraints.AnyCellOf class

Package: matlab.unittest.constraints

Test if any element of cell array meets constraint

Description

The `AnyCellOf` class creates a proxy of the actual value to the framework. The proxy enables a test writer to apply a constraint against each element of a cell array, which ensures that a passing result occurs if at least one element of the cell array satisfies the constraint.

It is intended that you use this class through `matlab.unittest` qualifications as shown in the examples. The class does not modify the provided actual value, but serves as a wrapper to perform the constraint analysis. The testing framework analyzes the constraint on an element-by-element basis.

Construction

`AnyCellOf(actVal)` creates a proxy instance that tests if any element of a provided cell array, `actVal`, meets a constraint. The test passes if at least one element individually satisfies the constraint.

Input Arguments

`actVal`

Actual value to test against constraint

Properties

`ActualValue`

Actual value to test against constraint. Set this property through the constructor via the `actVal` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Any Cell Satisfies Constraint

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.AnyCellOf

testCase = TestCase.forInteractiveUse;
```

Test that at least one cell of `actVal` is finite.

```
import matlab.unittest.constraints.IsFinite
actVal = {NaN, Inf, 5};
testCase.verifyThat(AnyCellOf(actVal), IsFinite)
```

```
Interactive verification passed.
```

Test that at least one cell of the actual value contains five elements.

```
import matlab.unittest.constraints.HasElementCount
testCase.verifyThat(AnyCellOf({42, [11 38], 1:5}), HasElementCount(5))
```

```
Interactive verification passed.
```

Test that at least one cell of the actual value matches `'tea'` regardless of case.

```
import matlab.unittest.constraints.Matches
testCase.verifyThat(AnyCellOf({'Coffee','Tea','Water'}), ...
    Matches('tea','IgnoringCase',true))
```

```
Interactive verification passed.
```

Test that at least one cell of the actual value is less than zero.

```
import matlab.unittest.constraints.IsLessThan
testCase.verifyThat(AnyCellOf({1, 5}), IsLessThan(0))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
All cells failed. The first cell failed because:
--> IsLessThan failed.
    --> The value must be less than the maximum value.

    Actual double:
             1
    Maximum Value (Exclusive):
             0

Actual Value Cell Array:
        [1]    [5]
```

Neither actual value element is less than zero.

Test that neither cell of the actual value is empty.

```
import matlab.unittest.constraints.IsEmpty
testCase.verifyThat(AnyCellOf({inputParser.empty,''}), ~IsEmpty)
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
All cells failed. The first cell failed because:
--> Negated IsEmpty failed.
    --> The value must not be empty.
    --> The value has a size of [0  0].

    Actual inputParser:
          0x0 inputParser array with properties:

            FunctionName
            CaseSensitive
            KeepUnmatched
            PartialMatching
            StructExpand
            Parameters
            Results
            Unmatched
```

```
            UsingDefaults

Actual Value Cell Array:
        [0x0 inputParser]    ''
```

Both actual value elements are empty.

See Also

See Also

AnyElementOf | EveryCellOf | EveryElementOf | `matlab.unittest.qualifications`

matlab.unittest.constraints.AnyElementOf class

Package: matlab.unittest.constraints

Test if any element of array meets constraint

Description

The `AnyElementOf` class creates a proxy of the actual value to the framework. The proxy enables a test writer to apply a constraint against each element of an array, which ensures that a passing result occurs when at least one element of the array satisfies the constraint.

It is intended that you use this class through `matlab.unittest` qualifications as shown in the examples. The class does not modify the provided actual value, but serves as a wrapper to perform the constraint analysis. The testing framework analyzes the constraint on an element-by-element basis.

Construction

`AnyElementOf(actVal)` creates a proxy instance that tests if any element of a provided array, `actVal`, meets a constraint. The test passes if at least one element individually satisfies the constraint.

Tips

- `AnyElementOf` checks if any element in the provided array satisfies an associated constraint. However, there are some constraints, such as `HasNaN` and `HasInf`, that natively validate if any of the elements satisfy a condition. In these situations, use of `AnyElementOf` is unnecessary and impedes qualification performance.

Input Arguments

`actVal`

Actual value to test against constraint

Properties

ActualValue

Actual value to test against constraint. Set this property through the constructor via the `actVal` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Any Element Satisfies Constraint

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.AnyElementOf

testCase = TestCase.forInteractiveUse;
```

Test that at least one element of `actVal` is finite.

```
import matlab.unittest.constraints.IsFinite
actVal = [NaN, Inf, 5];
testCase.verifyThat(AnyElementOf(actVal), IsFinite)
```

```
Interactive verification passed.
```

Test that at least one element of the actual value is complex.

```
import matlab.unittest.constraints.IsReal
testCase.verifyThat(AnyElementOf([1+0i 4i]), ~IsReal)
```

```
Interactive verification passed.
```

Test that at least one element of the actual value array is less than zero.

```
import matlab.unittest.constraints.IsLessThan
```

```
testCase.verifyThat(AnyElementOf([1 5]), IsLessThan(0))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
All elements failed. The first element failed because:
--> IsLessThan failed.
    --> The value must be less than the maximum value.

    Actual Value:
             1
    Maximum Value (Exclusive):
             0

Actual Value Array:
         1     5
```

Neither actual value element is less than zero.

See Also

See Also

AnyCellOf | EveryCellOf | EveryElementOf | `matlab.unittest.qualifications`

matlab.unittest.constraints.BooleanConstraint class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Interface class for boolean combinations of constraints

Description

The `BooleanConstraint` interface class provides an interface for boolean combinations of `Constraints`. Any constraint that derives from `BooleanConstraint` can be combined and negated using the `and` (`&`), `or` (`|`), and `not` (`~`) operators.

Classes that derive from the `BooleanConstraint` interface class must implement everything required by the standard `Constraint` interface. When a given constraint is negated, the diagnostics must be written in a different form than for a standard (non-negated) failure. Therefore, classes deriving from the `BooleanConstraint` class must implement a method to provide a `Diagnostic` object for the negated case, in addition to the non-negated case.

In exchange for meeting these requirements, all `BooleanConstraint` implementations inherit the appropriate MATLAB overloads for `and`, `or`, and `not` so that they can be combined with other `BooleanConstraint` objects or negated.

Methods

getNegativeDiagnosticFor	Produce negated diagnostic for value

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Boolean Combinations of Constraints

At the command prompt, create a test case for interactive testing and import several classes that subclass `BooleanConstraint`.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.HasElementCount
import matlab.unittest.constraints.HasLength
import matlab.unittest.constraints.HasInf
import matlab.unittest.constraints.HasNaN
import matlab.unittest.constraints.IsEmpty
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.IsGreaterThanOrEqualTo
import matlab.unittest.constraints.IsOfClass
import matlab.unittest.constraints.IsReal

testCase = TestCase.forInteractiveUse;
```

Test these passing cases.

```
testCase.verifyThat(3, IsReal & IsGreaterThanOrEqualTo(3))
testCase.verifyThat([1 2 3; 4 5 6], HasLength(3) & HasElementCount(6))
testCase.verifyThat([3 NaN 5], HasNaN | HasInf)
testCase.verifyThat(3, ~IsEqualTo(4))
testCase.verifyThat('Some char', IsOfClass(?char) & ~IsEmpty)
```

- “Create Custom Boolean Constraint”

See Also

See Also

Diagnostic | `matlab.unittest.constraints`

Topics

“Create Custom Boolean Constraint”

getNegativeDiagnosticFor

Class: matlab.unittest.constraints.BooleanConstraint
Package: matlab.unittest.constraints

Produce negated diagnostic for value

Syntax

```
diag = getNegativeDiagnosticFor(constObj, actVal)
```

Description

`diag = getNegativeDiagnosticFor(constObj, actVal)` produces a negated diagnostic for a value. The `getNegativeDiagnosticFor` method analyzes the provided value, `actVal`, against the constraint, `constObj`, and produces a `matlab.unittest.diagnostics.Diagnostic` object, `diag`, which corresponds to the negation of the constraint, `constObj`. This method is a protected method.

The diagnostics that this method produces are expressed in the negative sense of the constraint. For example, a hypothetical `IsTasty` constraint, when negated, should express that the actual value was "tasty", when it should not have been, and it should describe the details on why it was found to be tasty.

Like the `getDiagnosticFor` method of `Constraint`, the `getNegativeDiagnosticFor` is only called upon failures, and thus can afford a more detailed analysis than the `satisfiedBy` method.

Input Arguments

`constObj`

`BooleanConstraint` instance

`actVal`

Value for comparison

Examples

Implement `getNegativeDiagnosticFor` method

```
function diag = getNegativeDiagnosticFor(constraint, actual)
% getNegativeDiagnosticFor - produce a diagnostic when the constraint is
% incorrectly met
%
%   This method is called by the testing framework when the constraint has
%   been met but should not have been met because it was negated in a
%   boolean expression. It should produce a Diagnostic result that
%   describes the failure in the correct terms which express the
%   requirement that the constraint actually should not have been met.

import matlab.unittest.diagnostics.StringDiagnostic

if constraint.satisfiedBy(actual)
    % Create the negative diagnostic. This will show information such as the
    % constraint class name and display the raw actual and expected values.
    % Using the DiagnosticSense.NegativeDiagnostic enumeration also
    % produces language more appropriate for the negated case.
    diag = StringDiagnostic(sprintf(...
        ['Negated HasSameSizeAs failed.\nSize [%s] of ' ...
        'Actual Value and Expected Value were the same ' ...
        'but should not have been.', int2str(size(actual))));
else
    % Produce a passing diagnostic, with language appropriate for
    % the negated case.
    diag = StringDiagnostic('Negated HasSameSizeAs passed.');
end % if

end % function
```

- “Create Custom Boolean Constraint”

See Also

See Also

Diagnostic | getDiagnosticFor | satisfiedBy

Topics

"Create Custom Boolean Constraint"

matlab.unittest.constraints.CellComparator class

Package: matlab.unittest.constraints

Comparator for cell arrays

Description

The `CellComparator` compares cell arrays.

Construction

`CellComparator` creates a comparator for cell arrays.

`CellComparator(compObj)` indicates a comparator, `compObj`, that defines the comparator used to compare values contained in the cell array. By default, a cell comparator supports only empty cell arrays.

`CellComparator(compObj,Name,Value)` provides a comparator with additional options specified by one or more `Name,Value` pair arguments.

`CellComparator(Name,Value)` provides a comparator for empty cell arrays with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`compObj`

Comparator object

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

'Recursively'

Indicator of whether comparator operates recursively, specified as `false` or `true` (`logical` `0` or `1`). When this value is `false`, the comparator does not operate recursively on its data.

When the value is `true`, the data types the cell comparator supports are fully supported in recursion. For example:

```
comp1 = CellComparator(StringComparator)
comp2 = CellComparator(StringComparator,'Recursively', true)
```

Both `comp1` and `comp2` support cell arrays of strings and character arrays. However, only `comp2` supports cell arrays that recursively contain either cell arrays or strings as their elements.

Default: `false`

Properties

Recursive

Indicator of whether comparator operates recursively, specified in the name-value pair argument, `'Recursively'`

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Compare Cell Arrays

Create a test case for interactive testing.

```
import matlab.unittest.TestCase;
import matlab.unittest.constraints.CellComparator
import matlab.unittest.constraints.StringComparator
import matlab.unittest.constraints.IsEqualTo
```

```
testCase = TestCase.forInteractiveUse;
```

Use a `CellComparator` to test that two cell arrays are equal to each other.

```
actual = {'abc','def'};
expected = {'abc','def'};
testCase.verifyThat(actual, IsEqualTo(expected,...
    'Using', CellComparator(StringComparator)))
```

```
Interactive verification passed.
```

By default, the `CellComparator` supports only comparison of empty cell arrays. Therefore, it is necessary to pass it a `StringComparator`.

Change the actual value and compare it to the expected value. To satisfy the constraint, construct it to ignore case and whitespace characters.

```
actual = {'ABC','D E F'};
testCase.verifyThat(actual, IsEqualTo(expected, 'Using', ...
    CellComparator(StringComparator), 'IgnoringWhitespace', ...
    true, 'IgnoringCase',true))
```

```
Interactive verification passed.
```

Test nested cell arrays of character vectors by constructing the comparator to operate recursively.

```
actual = {'abc',{'def','ghi'}};
expected = {'abc',{'def','ghi'}};

testCase.verifyThat(actual, IsEqualTo(expected, 'Using', ...
    CellComparator(StringComparator, 'Recursively', true)))
```

```
Interactive verification passed.
```

See Also

See Also

matlab.unittest.constraints.IsEqualTo | matlab.unittest.constraints.Tolerance

Introduced in R2013a

matlab.unittest.constraints.Constraint class

Package: matlab.unittest.constraints

Fundamental interface class for comparisons

Description

The `Constraint` interface class is the means by which `matlab.unittest` constraints encode comparison logic and the corresponding diagnostic information. Every comparison that conditionally can produce a failure inherits from the `Constraint` interface class.

Classes deriving from the `Constraint` interface class must provide a means to determine if a given value satisfies the constraint. To do this, implement the `satisfiedBy` method, which includes the definition of the underlying comparison logic. Classes deriving from the `Constraint` class also must provide a diagnostic for any given actual value. The testing framework uses the diagnostic when it encounters a qualification failure. To do this, implement the `getDiagnosticFor` method.

In exchange for meeting these requirements, all `Constraint` implementations are easily used with all qualification types through the `verifyThat`, `assertThat`, `assumeThat`, or `fatalAssertThat` methods. The qualifications use the comparison and diagnostic knowledge contained within the constraints. Also, the constraints can be used in situations where a test failure is not wanted, but the testing framework needs to reuse the comparison logic. For example, a constraint implementation may want to use the logic defined inside of another constraint. Since the constraint can interact with the other constraint directly, it can use the logic without the potential of causing a qualification failure.

Methods

getDiagnosticFor	Produce diagnostic for compared value
satisfiedBy	Determine whether value satisfies constraint

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

assertThat | assumeThat | ConstraintDiagnostic | Diagnostic | fatalAssertThat | `matlab.unittest.constraints` | verifyThat

Topics

"Create Custom Constraint"

getDiagnosticFor

Class: matlab.unittest.constraints.Constraint
Package: matlab.unittest.constraints

Produce diagnostic for compared value

Syntax

```
diag = getDiagnosticFor(constObj,actVal)
```

Description

`diag = getDiagnosticFor(constObj,actVal)` produces a diagnostic, `diag`, for a compared value, `actVal`. When creating a custom constraint, the class author must implement the `getDiagnosticFor` method so that it analyzes the value, `actVal`, against the constraint, `constObj`, and instantiates and returns a `matlab.unittest.diagnostics.Diagnostic` object.

Typically, the testing framework calls this method when it encounters a qualification failure. Therefore, the constraint author can afford to undertake a more detailed analysis in the `getDiagnosticFor` method than the `satisfiedBy` method.

Input Arguments

`actVal`

Value for comparison

`constObj`

`Constraint` instance

Output Arguments

`diag`

`Diagnostic` instance

See Also

See Also

ConstraintDiagnostic | Diagnostic | satisfiedBy

Topics

"Create Custom Constraint"

satisfiedBy

Class: matlab.unittest.constraints.Constraint
Package: matlab.unittest.constraints

Determine whether value satisfies constraint

Syntax

```
TF = satisfiedBy(constObj,actVal)
```

Description

`TF = satisfiedBy(constObj,actVal)` determines whether a value, `actVal`, satisfies a constraint, `constObj`. The `satisfiedBy` method is used to determine qualification success or failure. It returns `true` or `false` (`logical` `0` or `1`). When creating a custom constraint, a class author must place comparison logic in this method.

Since the most common usage is for the passing case, the constraint author should optimize for speed in that case. It is only in the failing case that more expensive detailed analysis is helpful.

Input Arguments

`actVal`

Value to evaluate against the constraint

`constObj`

`Constraint` instance

See Also

See Also

getDiagnosticFor

Topics

"Create Custom Constraint"

matlab.unittest.constraints.ContainsSubstring class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying string containing substring

Construction

`ContainsSubstring(substring)` creates a constraint that specifies a string scalar or character vector containing `substring`. The constraint is satisfied only if the actual value contains an expected substring.

`ContainsSubstring(substring,Name,Value)` provides a constraint with additional options specified by one or more `Name,Value` pair arguments. `Name` must appear inside single quotes (`' '`). You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Input Arguments

`substring`

Text that must be contained within the actual value, specified as a character vector or string scalar. `substring` can include newline characters.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'IgnoringCase'`

Indicator if the constraint is insensitive to case, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

`'IgnoringWhitespace'`

Indicator if the constraint is insensitive to whitespace, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

Properties

`IgnoreCase`

Indicator if the constraint is insensitive to case, specified in the name-value pair argument, `'IgnoringCase'`. This property applies at all levels of recursion, such as nested structures.

`IgnoreWhitespace`

Indicator if the constraint is insensitive to whitespace, specified in the name-value pair argument, `'IgnoringWhitespace'`. This property applies at all levels of recursion, such as nested structures.

`Substring`

Character vector or string scalar that must be included in the actual value, specified in the input argument, `substring`.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Contains Specified Substring

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
```

```
import matlab.unittest.constraints.ContainsSubstring

testCase = TestCase.forInteractiveUse;
```

Define the actual value.

```
actVal = 'This Is One Long Message';
```

Test the `actVal` contains the text `'One'`.

```
testCase.verifyThat(actVal, ContainsSubstring('One'))
```

```
Interactive verification passed.
```

Test the `actVal` contains the text `'long'`.

```
testCase.verifyThat(actVal, ContainsSubstring('long'))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
ContainsSubstring failed.
--> The value does not contain the substring.

Actual char:
    This Is One Long Message
Expected Substring:
    long
```

By default, the `ContainsSubstring` constraint is case sensitive.

Repeat the test ignoring case.

```
testCase.verifyThat(actVal, ContainsSubstring('long',...
    'IgnoringCase', true))
```

```
Interactive verification passed.
```

Test `actVal` contains the text `'thisisone'`. For the test to pass, configure the constraint to ignore whitespace and case.

```
testCase.verifyThat(actVal, ContainsSubstring('thisisone', ...
    'IgnoringCase', true, 'IgnoringWhitespace', true))
```

```
Interactive verification passed.
```

Assert that `actVal` does not contain the text `'longer'`.

```
testCase.assertThat(actVal, ~ContainsSubstring('longer',...
    'IgnoringCase', true))
```

```
Interactive verification passed.
```

See Also

See Also

EndsWithSubstring | IsSubstringOf | Matches | StartsWithSubstring

matlab.unittest.constraints.EndsWithSubstring class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying string ending with substring

Construction

`EndsWithSubstring(suffix)` creates a constraint specifying a string scalar or character vector ending with a substring. The constraint is satisfied only if the actual value ends with the expected text, `suffix`.

`EndsWithSubstring(suffix,Name,Value)` provides a constraint with additional options specified by one or more `Name,Value` pair arguments. `Name` must appear inside single quotes (`' '`). You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Input Arguments

`suffix`

Text that occurs at the end of the actual value, specified as a string scalar or character vector. `suffix` can include newline characters.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'IgnoringCase'`

Indicator if the constraint is insensitive to case, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

`'IgnoringWhitespace'`

Indicator if the constraint is insensitive to whitespace, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

Properties

`IgnoreCase`

Indicator if the constraint is insensitive to case, specified in the name-value pair argument, `'IgnoringCase'`. This property applies at all levels of recursion, such as nested structures.

`IgnoreWhitespace`

Indicator if the constraint is insensitive to whitespace, specified in the name-value pair argument, `'IgnoringWhitespace'`. This property applies at all levels of recursion, such as nested structures.

`Suffix`

Text that occurs at the end of the actual value, specified in the input argument, `suffix`.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Ends with Specified Text

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.EndsWithSubstring
```

```
testCase = TestCase.forInteractiveUse;
```

Define the actual value.

```
actVal = 'This Is One Long Message';
```

Test the `actVal` ends with `'Message'`.

```
testCase.verifyThat(actVal, EndsWithSubstring('Message'))
```

```
Interactive verification passed.
```

Test the `actVal` ends with `'AgE'`.

```
testCase.verifyThat(actVal, EndsWithSubstring('AgE'))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
EndsWithSubstring failed.
--> The value does not end with the supplied suffix.

Actual char:
    This Is One Long Message
Expected Suffix:
    AgE
```

By default, the `EndsWithSubstring` constraint is case sensitive.

Repeat the test ignoring case.

```
testCase.verifyThat(actVal, EndsWithSubstring('AgE',...
    'IgnoringCase', true))
```

```
Interactive verification passed
```

Test the `actVal` ends with `'longmessage'`. For the test to pass, configure the constraint to ignore whitespace and case.

```
testCase.verifyThat(actVal, EndsWithSubstring('longmessage', ...
    'IgnoringCase', true, 'IgnoringWhitespace', true))
```

```
Interactive verification passed.
```

Assert that `actVal` does not end with `'long'`.

```
testCase.assertThat(actVal, ~EndsWithSubstring('long'))
```

```
Interactive verification passed.
```

See Also

See Also

ContainsSubstring | IsSubstringOf | Matches | StartsWithSubstring

matlab.unittest.constraints.Eventually class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Poll for value to asynchronously satisfy constraint

Construction

`outConstObj = Eventually(constObj)` creates a constraint, `outConstObj`, that polls for an actual value returned from a function handle to asynchronously satisfy the `constObj` constraint. It is not satisfied if evaluation of the function handle does not produce a value that satisfies the constraint within 20 seconds. The testing framework invokes the `drawnow` function while the `Eventually` constraint waits for specified function to satisfy the constraint.

`outConstObj = Eventually(constObj,'WithTimeoutOf',timeOutVal)` creates a constraint that polls for the constraint to be satisfied within the timer period specified in `timeOutVal`.

Input Arguments

`constObj`

`Constraint` instance

`timeOutVal`

Maximum time to attempt to produce passing behavior, specified in seconds

Default: `20` seconds

Properties

`Timeout`

Maximum time to attempt to produce passing behavior, specified by the `timeOutVal` input argument

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Verify Test Passes Eventually

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.Eventually
import matlab.unittest.constraints.IsGreaterThan
import matlab.unittest.constraints.IsLessThan

testCase = TestCase.forInteractiveUse;
```

Verify that, within the timeout period, a call to `toc` results in a value greater than 10 (seconds). The `Eventually` constraint repeatedly calls `toc` until either the constraint is satisfied or the elapsed time exceeds the timeout period. Repeated calls to `toc` result in the elapsed time since the last call to `tic`.

```
tic
testCase.verifyThat(@toc, Eventually(IsGreaterThan(10)))
```

```
Interactive verification passed.
```

The verification may take as long as 10 seconds for `toc` to reach a passing value. If you issue the call to `tic` and wait more than 10 seconds before issuing the `verifyThat` command, the verification returns immediately since `toc` already returns a value greater than 10.

Verify that, within the timeout period, `toc` does not return a negative value.

```
testCase.verifyThat(@toc, Eventually(IsLessThan(0)))
```

```
Interactive verification failed.

----------------------
```

```
Framework Diagnostic:
---------------------
Eventually failed.
--> The constraint never passed with a timeout of 20 second(s).
--> IsLessThan failed.
    --> The value must be less than the maximum value.

    Actual double:
          35.518692271194674
    Maximum Value (Exclusive):
             0

Evaluated Function:
        @toc
```

This failure is expected since elapsed time is not going to be less than zero. However, `Eventually` polls `toc` for the duration of the timeout period.

Adjust the timeout period so `Eventually` polls for 5 seconds.

```
tic
testCase.verifyThat(@toc, Eventually(IsGreaterThan(10), ...
    'WithTimeoutOf', 5))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
Eventually failed.
--> The constraint never passed with a timeout of 5 second(s).
--> IsGreaterThan failed.
    --> The value must be greater than the minimum value.

    Actual double:
           5.157653412219959
    Minimum Value (Exclusive):
            10

Evaluated Function:
        @toc
```

If you didn't wait more than 5 seconds between calls to `tic` and `verifyThat`, the test fails because the elapsed time is not greater than 10 seconds within the modified timeout period.

See Also

See Also

matlab.unittest.constraints.Constraint | `drawnow`

matlab.unittest.constraints.EveryCellOf class

Package: matlab.unittest.constraints

Test if all elements of cell array meet constraint

Description

The `EveryCellOf` class creates a proxy of the actual value to the framework. The proxy enables a test writer to apply a constraint against each element of a cell array, which ensures that a passing result occurs when every element of the cell array satisfies the constraint.

It is intended that you use this class through `matlab.unittest` qualifications as shown in the examples. The class does not modify the provided actual value, but serves as a wrapper to perform the constraint analysis. The testing framework analyzes the constraint on an element-by-element basis.

Construction

`EveryCellOf(actVal)` creates a proxy instance that tests if every element of a provided cell array, `actVal`, meets a constraint. The test passes if all elements satisfy the constraint.

Tips

- `EveryCellOf` checks if every element in the provided cell array satisfies an associated constraint. However, there are some constraints, a prominent one being `IsEqualTo`, that natively validate if all elements in cell arrays satisfy a condition. In these situations, use of `EveryCellOf` is unnecessary and impedes qualification performance.

Input Arguments

`actVal`

Actual value to test against constraint

Properties

ActualValue

Actual value to test against constraint. Set this property through the constructor via the `actVal` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Every Cell Satisfies Constraint

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.EveryCellOf

testCase = TestCase.forInteractiveUse;
```

Test that every cell of `actVal` contains the substring `'ain'`.

```
import matlab.unittest.constraints.ContainsSubstring
actVal = {'Rain','Main','Plain'};
testCase.verifyThat(EveryCellOf(actVal), ContainsSubstring('ain'))
```

```
Interactive verification passed.
```

Test that every cell of the actual value array has two elements.

```
import matlab.unittest.constraints.HasElementCount
testCase.verifyThat(EveryCellOf({{'hello','world'}, {11 38}}), HasElementCount(2))
```

```
Interactive verification passed.
```

Test that every cell of the actual value array is empty.

```
import matlab.unittest.constraints.IsEmpty
```

```
testCase.verifyThat(EveryCellOf({inputParser.empty,''}), IsEmpty)
```

```
Interactive verification passed.
```

Test that every cell of the actual value array is finite.

```
import matlab.unittest.constraints.IsFinite
testCase.verifyThat(EveryCellOf({NaN, Inf, 5}), IsFinite)
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
At least one cell failed.

Failing indices:
         1     2
The first failing cell failed because:
--> IsFinite failed.
    --> The value must be finite.

    Actual Value:
           NaN

Actual Value Cell Array:
        [NaN]    [Inf]    [5]
```

Only the third element has a finite value.

Test that every cell of the actual value array is real.

```
import matlab.unittest.constraints.IsReal
testCase.verifyThat(EveryCellOf({1 4i}), IsReal)
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
At least one cell failed.

Failing indices:
         2
The first failing cell failed because:
```

```
--> IsReal failed.
    --> The value must be real.

    Actual Value:
          0.000000000000000 + 4.000000000000000i

Actual Value Cell Array:
        [1]    [0.000000000000000 + 4.000000000000000i]
```

The second element has an imaginary value.

See Also

See Also

AnyCellOf | AnyElementOf | EveryElementOf | `matlab.unittest.qualifications`

matlab.unittest.constraints.EveryElementOf class

Package: matlab.unittest.constraints

Test if all elements of array meet constraint

Description

The `EveryElementOf` class creates a proxy of the actual value to the framework. The proxy enables a test writer to apply a constraint against each element of an array, which ensures that a passing result occurs when every element of the array that satisfies the constraint.

It is intended that you use this class through `matlab.unittest` qualifications as shown in the examples. The class does not modify the provided actual value, but serves as a wrapper to perform the constraint analysis. The testing framework analyzes the constraint on an element-by-element basis.

Construction

`EveryElementOf(actVal)` creates a proxy instance that tests if every element of a provided array, `actVal`, meets a constraint. The test passes if all elements satisfy the constraint.

Tips

- `EveryElementOf` checks if every element in the provided array satisfies an associated constraint. However, there are some constraints, such as `IsEqualTo` and `IsGreaterThan`, `IsLessThan`, that natively validate if all elements in the array satisfy a condition. In these situations, use of `EveryElementOf` is unnecessary and impedes qualification performance.

Input Arguments

`actVal`

Actual value to test against constraint

Properties

ActualValue

Actual value to test against constraint. Set this property through the constructor via the `actVal` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Every Element Satisfies Constraint

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.EveryElementOf

testCase = TestCase.forInteractiveUse;
```

Test that every element of `actVal` is less than 55.

```
import matlab.unittest.constraints.IsLessThan
actVal = [1 1 2 3 5 8 13 21 34];
testCase.verifyThat(EveryElementOf(actVal), IsLessThan(55))
```

```
Interactive verification passed.
```

Test that every element of the actual value array is complex.

```
import matlab.unittest.constraints.IsReal
testCase.verifyThat(EveryElementOf([1+2i 4i]), ~IsReal)
```

```
Interactive verification passed.
```

Test that every element of the actual value array is less than zero.

```
import matlab.unittest.constraints.IsLessThan
```

```
testCase.verifyThat(EveryElementOf([1 -5]), IsLessThan(0))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
At least one element failed.

Failing indices:
         1
The first failing element failed because:
--> IsLessThan failed.
    --> The value must be less than the maximum value.

    Actual Value:
             1
    Maximum Value (Exclusive):
             0

Actual Value Array:
         1    -5
```

Only the second element is less than zero.

Test that every element of the actual value array has a NaN value.

```
import matlab.unittest.constraints.HasNaN
testCase.verifyThat(EveryElementOf([NaN 0/0 5]), HasNaN)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
At least one element failed.

Failing indices:
         3
The first failing element failed because:
--> HasNaN failed.
    --> The value must be NaN.

    Actual Value:
             5
```

```
Actual Value Array:
       NaN   NaN     5
```

Only the third element has a `NaN` value.

See Also

See Also

AnyCellOf | AnyElementOf | EveryCellOf | `matlab.unittest.qualifications`

matlab.unittest.constraints.HasElementCount class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying expected number of elements

Construction

`HasElementCount(countVal)` provides a constraint that specifies an expected number of elements. The constraint is satisfied if the actual value array has the same number of elements specified as by `countVal`.

Input Arguments

`countVal`

Number of elements a value must have to satisfy the constraint.

Properties

`Count`

Number of elements a value must have to satisfy the constraint. Set this property through the constructor via the `countVal` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test for Expected Number of Elements

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.HasElementCount

testCase = TestCase.forInteractiveUse;
```

Verify a scalar has an element count of one.

```
testCase.verifyThat(3, HasElementCount(1))
```

```
Interactive verification passed.
```

Test the element count of the vector.

```
testCase.assertThat([42 7 13], HasElementCount(3))
```

```
Interactive assertion passed.
```

Test the element count of the matrix.

```
testCase.assertThat([1 2 3; 4 5 6], HasElementCount(5))
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
HasElementCount failed.
--> The value did not have the correct number of elements.

    Actual Number of Elements:
             6
    Expected Number of Elements:
             5

Actual Value:
         1     2     3
         4     5     6
Assertion failed.
```

The matrix has six elements.

Test that a square identity matrix has the correct number of elements.

```
n = 7;
testCase.assumeThat(eye(n), HasElementCount(n^2))
```

```
Interactive assumption passed.
```

Verify the element count of a cell array of character vectors.

```
testCase.verifyThat({'someText', 'moreText'}, HasElementCount(2))
```

```
Interactive verification passed.
```

Test the element count of a structure.

```
s.Field1 = 1;
s.Field2 = 2;
testCase.verifyThat(s, HasElementCount(2))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
HasElementCount failed.
--> The value did not have the correct number of elements.

    Actual Number of Elements:
             1
    Expected Number of Elements:
             2

Actual Value:
        Field1: 1
        Field2: 2
```

The structure has two fields, but it only has one element.

```
testCase.verifyThat(s, HasElementCount(1))
```

```
Interactive verification passed.
```

See Also

See Also

HasLength | HasSize | IsEmpty | `numel`

matlab.unittest.constraints.HasField class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying structure containing particular field

Construction

`HasField(fieldname)` provides a constraint specifying structure containing particular field, `fieldname`. The constraint is satisfied if the actual value is a structure and that structure contains a field named `fieldname`.

Input Arguments

`fieldname`

Name of the field that a structure must contain to satisfy the constraint, specified as a character vector.

Properties

`Field`

Name of the field that a structure must contain to satisfy the constraint. Set this property through the constructor via the `fieldname` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Structure Has Particular Field

Create a `TestCase` for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.HasField

testCase = TestCase.forInteractiveUse;
```

Define the following structure, `S`, with two fields.

```
S = struct('Tag', 123, 'Serial', 345);
```

Verify that the structure has a `'Tag'` field.

```
testCase.verifyThat(S, HasField('Tag'))
```

```
Interactive verification passed.
```

Verify that the structure has a `'tag'` field.

```
testCase.verifyThat(S, HasField('tag'))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
HasField failed.
--> The value did not have the expected field.

    Actual Fieldnames:
            'Tag'
            'Serial'
    Expected Fieldname:
            'tag'

Actual Value:
           Tag: 123
        Serial: 345
```

The verification fails because the field name comparison is case sensitive.

Verify that the structure has a `'Tag'` field.

```
testCase.verifyThat(S, HasField('Tag'))
```

```
Interactive verification passed.
```

Verify that the structure has both a `'Tag'` and a `'Serial'` field.

```
testCase.verifyThat(S, HasField('Tag') & HasField('Serial'))
```

```
Interactive verification passed.
```

Verify that the structure does not have a `'Name'` field.

```
testCase.verifyThat(S, ~HasField('Name'))
```

```
Interactive verification passed.
```

See Also

matlab.unittest.constraints.HasInf class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying array containing any infinite value

Construction

`HasInf` creates a constraint that is able to determine if any value of an actual value array is an infinite value. This constraint is satisfied only if the actual value array contains at least one infinite value.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Array Contains Infinite Value

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.HasInf
```

```
testCase = TestCase.forInteractiveUse;
```

Test that the value `Inf` satisfies the constraint.

```
testCase.verifyThat(Inf, HasInf)
```

```
Interactive verification passed.
```

Assert that an array contains an infinite value.

```
testCase.assertThat([0 1 1 2 3 5 8 13], HasInf)
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
HasInf failed.
--> At least one element must be Inf or -Inf.

Actual double:
         0     1     1     2     3     5     8    13
Assertion failed.
```

The array does not contain any infinite values.

Verify that an array contains an infinite value.

```
testCase.verifyThat([-Inf 5 NaN], HasInf)
```

```
Interactive verification passed.
```

Assert that a complex number that is infinite in the imaginary part satisfies the constraint.

```
testCase.assertThat(42+Inf*1i, HasInf)
```

```
Interactive verification passed.
```

Verify that an array does not contain any infinite values.

```
testCase.verifyThat([NaN -7+NaN*1i], ~HasInf)
```

```
Interactive verification passed.
```

Negating the `HasInf` constraint does not ensure the value is finite, only that it does not contain any infinite values.

See Also

See Also

HasNaN | IsFinite | `isinf`

matlab.unittest.constraints.HasLength class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying expected length of array

Construction

`HasLength(lengthVal)` provides a constraint that specifies an expected length of an array. The constraint is satisfied if the largest dimension length of the actual value array has the same number of elements specified as by `lengthVal`.

Input Arguments

`lengthVal`

Length a value must have to satisfy the constraint.

Properties

`Count`

Length a value must have to satisfy the constraint. Set this property through the constructor via the `lengthVal` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test for Expected Array Length

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.HasLength

testCase = TestCase.forInteractiveUse;
```

Assert that a 2x5x3 array has an expected length.

```
testCase.assertThat(rand(2, 5, 3), HasLength(5))
```

```
Interactive assertion passed.
```

Verify that a cell array of character vectors has an expected length.

```
testCase.verifyThat({'SomeString', 'SomeOtherString'}, HasLength(2))
```

```
Interactive verification passed.
```

Verify that an identity matrix has an expected length.

```
testCase.verifyThat(eye(2), HasLength(4))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
HasLength failed.
--> The array has an incorrect length.

    Actual Length:
             2
    Expected Length:
             4

Actual Array:
         1     0
         0     1
```

The matrix has a length of 2.

See Also

See Also

HasElementCount | HasSize | IsEmpty | `length`

matlab.unittest.constraints.HasNaN class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying array containing NaN value

Construction

`HasNaN` creates a constraint that is able to determine if any value of an actual value array is `NaN`. This constraint is satisfied only if the actual value array contains at least one `NaN` value.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Array Contains NaN Value

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.HasNaN
```

```
testCase = TestCase.forInteractiveUse;
```

Test that the value `NaN` satisfies the constraint.

```
testCase.verifyThat(NaN, HasNaN)
```

```
Interactive verification passed.
```

Assert that an array contains a NaN value.

```
testCase.assertThat([0 1 1 2 3 5 8 13], HasNaN)
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
HasNaN failed.
--> At least one element must be NaN.

Actual double:
         0     1     1     2     3     5     8    13
Assertion failed.
```

The array does not contain a NaN value.

Verify that an array contains a NaN value.

```
testCase.verifyThat([-Inf 5 NaN], HasNaN)
```

```
Interactive verification passed.
```

Assert that a complex number satisfies the constraint.

```
testCase.assertThat(42+NaN*1i, HasNaN)
```

```
Interactive assertion passed.
```

Verify that an array does not contain any `NaN` values.

```
testCase.verifyThat([Inf -7+Inf*1i], ~HasNaN)
```

```
Interactive verification passed.
```

Negating the `HasNaN` constraint does not ensure the value is finite, only that it does not contain any `NaN` values.

See Also

See Also

HasInf | IsFinite | `isnan`

matlab.unittest.constraints.HasSize class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying expected size of array

Construction

`HasSize(sizeVal)` provides a constraint that specifies an expected size of an array. The constraint is satisfied if the actual value array size is equal to the size specified by `sizeVal`.

Input Arguments

`sizeVal`

Size a value must have to satisfy the constraint.

Properties

`Size`

Size a value must have to satisfy the constraint. Set this property through the constructor via the `sizeVal` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test for Expected Array Size

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.HasSize

testCase = TestCase.forInteractiveUse;
```

Assert that a 2x5x3 array has an expected size.

```
testCase.assertThat(rand(2, 5, 3), HasSize([2 5 3]))
```

```
Interactive assertion passed.
```

Verify that a cell array of character vectors has an expected size.

```
testCase.verifyThat({'SomeText', 'SomeOtherText'}, HasSize([1 2]))
```

```
Interactive verification passed.
```

Verify that an identity matrix has an expected size.

```
testCase.verifyThat(eye(2), HasSize([4 1]))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
HasSize failed.
--> The value had an incorrect size.

    Actual Size:
             2     2
    Expected Size:
             4     1

Actual Value:
         1     0
         0     1
```

The matrix has a size of 2x2.

See Also

See Also

HasElementCount | HasLength | IsEmpty | `size`

matlab.unittest.constraints.HasUniqueElements class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying set contains unique elements

Construction

`HasUniqueElements` creates a constraint specifying that a set contains unique elements. The constraint produces a qualification failure for any actual value set that does not contain unique elements. If `numel(unique(actualSet))` is equal to `numel(actualSet)`, the constraint considers the actual value set to have unique elements.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test for Unique Elements

Create a test case for interactive testing.

```
import matlab.unittest.TestCase;
import matlab.unittest.constraints.HasUniqueElements;

testCase = TestCase.forInteractiveUse;
```

Test `'abc'` and `'Mississippi'` for unique elements.

```
testCase.verifyThat('abc', HasUniqueElements);
```

```
Interactive verification passed.
```

```
testCase.verifyThat('Mississippi', HasUniqueElements);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
HasUniqueElements failed.
--> The value contains 3 nonunique element(s):
    --> Nonunique element found at indices [2 5 8 11]:
            i
    --> Nonunique element found at indices [9 10]:
            p
    --> Nonunique element found at indices [3 4 6 7]:
            s

Actual char:
    Mississippi
```

Assert that a set of doubles has unique elements.

```
testCase.assertThat(magic(6), HasUniqueElements);
```

```
Interactive assertion passed.
```

```
testCase.assertThat(abs(-3:3), HasUniqueElements);
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
HasUniqueElements failed.
--> The value contains 3 nonunique element(s):
    --> Nonunique element found at indices [3 5]:
                1
    --> Nonunique element found at indices [2 6]:
                2
    --> Nonunique element found at indices [1 7]:
                3

Actual double:
         3     2     1     0     1     2     3
Assertion failed.
```

Verify that a cell array has unique elements.

```
testCase.verifyThat({'abc','123';'abc','345'},HasUniqueElements);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
HasUniqueElements failed.
--> The value contains 1 nonunique element(s):
    --> Nonunique element found at indices [1 2]:
                'abc'

Actual cell:
        'abc'    '123'
        'abc'    '345'
```

Assert that a table has unique rows.

```
t = table([3;3;5],{'A';'C';'E'},logical([1;0;0]));
testCase.assertThat(t,HasUniqueElements);
```

```
Interactive assertion passed.
```

See Also

See Also

`matlab.unittest.constraints` | `unique`

Introduced in R2016a

matlab.unittest.constraints.IsAnything class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying any value

Construction

`IsAnything` provides a constraint specifying any value. The constraint is satisfied by any value. It is the default constraint for selectors that do not require an input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Instantiate `IsAnything` Object

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsAnything

testCase = TestCase.forInteractiveUse;
```

Verify that the following values satisfy the `IsAnything` constraint: `NaN`, an `inputParser` object, a numeric array, and a complex number.

```
testCase.verifyThat(NaN, IsAnything)
testCase.verifyThat(inputParser, IsAnything)
testCase.verifyThat(1:10, IsAnything)
testCase.verifyThat(-Inf+5j, IsAnything)
```

```
Interactive verification passed.
Interactive verification passed.
```

```
Interactive verification passed.
Interactive verification passed.
```

Test that empty cells, arrays, and character vectors satisfy the `IsAnything` constraint.

```
testCase.verifyThat({}, IsAnything)
testCase.verifyThat([], IsAnything)
testCase.verifyThat('', IsAnything)
```

```
Interactive verification passed.
Interactive verification passed.
Interactive verification passed.
```

The constraint is satisfied even though the data are empty.

See Also

See Also

`matlab.unittest.selectors`

matlab.unittest.constraints.IsEmpty class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying empty value

Construction

`IsEmpty` provides a constraint that specifies an empty value. The constraint is satisfied if the actual value array is empty.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Is Empty

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEmpty

testCase = TestCase.forInteractiveUse;
```

Verify that an empty character vector satisfies the `IsEmpty` constraint.

```
testCase.verifyThat('', IsEmpty)
```

```
Interactive verification passed.
```

Assert that a vector is not empty.

```
testCase.assertThat([13 42], ~IsEmpty)
```

```
Interactive verification passed.
```

Verify that a matrix with a dimension of length zero is empty.

```
testCase.verifyThat(rand(2, 5, 0, 3), IsEmpty)
```

```
Interactive verification passed.
```

Assert that an empty object satisfies the `IsEmpty` constraint.

```
testCase.assertThat(MException.empty, IsEmpty)
```

```
Interactive assertion passed.
```

Verify that a cell array containing an empty numeric array is empty.

```
testCase.verifyThat({[]}, IsEmpty)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsEmpty failed.
--> The value must be empty.
--> The value has a size of [1  1].

Actual Value:
        {[]}
```

The cell array is not empty, even though the only thing it contains is an empty array.

See Also

See Also

HasCount | HasLength | HasSize | `isempty`

matlab.unittest.constraints.IsFalse class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying false value

Construction

`IsFalse` provides a constraint specifying a false value. This constraint is satisfied only by a scalar logical with a value of `false`.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test Actual Value Is False

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsFalse

testCase = TestCase.forInteractiveUse;
```

Test that `false` satisfies the `IsFalse` constraint.

```
testCase.verifyThat(false, IsFalse)
```

```
Interactive verification passed.
```

Test that the `IsFalse` constraint is not satisfied by `true`.

```
testCase.verifyThat(true, IsFalse)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsFalse failed.
--> The value must evaluate to "false".

Actual Value:
         1
```

The test fails because `true` returns `logical(1)`.

Test that the `IsFalse` constraint is not satisfied by the double `0`.

```
testCase.verifyThat(0, IsFalse)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsFalse failed.
--> The value must be logical. It is of type "double".

Actual Value:
         0
```

The `IsFalse` constraint is satisfied only by `logical(0)`.

Test that the `IsFalse` constraint is not satisfied by a logical array of zeros.

```
testCase.verifyThat([false false false], IsFalse)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsFalse failed.
--> The value must be scalar. It has a size of [1  3].

Actual Value:
         0     0     0
```

The `IsFalse` constraint is only satisfied if the value is scalar and `logical(0)`.

See Also

See Also

IsTrue

matlab.unittest.constraints.IsFinite class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying finite value

Construction

`IsFinite` creates a constraint that is able to determine if all values of an actual value array are finite. This constraint is satisfied only if the actual value array does not contain any infinite or `NaN` values.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Array Contains Only Finite Values

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsFinite

testCase = TestCase.forInteractiveUse;
```

Test that the value `17` satisfies the constraint.

```
testCase.verifyThat(17, IsFinite)
```

```
Interactive verification passed.
```

Assert that an array is completely finite.

```
testCase.assertThat([0 1 1 2 3 5 8 13], IsFinite)
```

```
Interactive assertion passed.
```

Verify that an array is completely finite.

```
testCase.verifyThat([-Inf 5 NaN], IsFinite)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsFinite failed.
--> All elements must be finite-valued.
    Failing indices:
             1     3

Actual Value:
      -Inf     5   NaN
```

The array contains an infinite value.

Test if a complex number that is infinite in the imaginary part satisfies the constraint.

```
testCase.assertThat(42+Inf*1i, IsFinite)
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
IsFinite failed.
--> The value must be finite.

Actual Value:
     42.000000000000000 +               Infi
Assertion failed.
```

Verify that an array does not contain all finite values.

```
testCase.verifyThat([NaN -7+NaN*1i], ~IsFinite)
```

```
Interactive verification passed.
```

See Also

See Also

HasInf | HasNaN | `isfinite`

matlab.unittest.constraints.IsGreaterThan class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying value greater than another value

Construction

`IsGreaterThan(floorVal)` creates a constraint specifying that an actual value is greater than another value. The constraint is satisfied if the actual value array is greater than the specified floor value, `floorVal`. The actual value is greater than `floorVal` only if the result of the expression `actual > floorVal` is nonempty and all values are true.

Input Arguments

`floorVal`

Largest value that fails the constraint.

Properties

`FloorValue`

Largest value that fails the constraint. Set this property through the constructor via the `floorVal` input argument.

Methods

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Is Greater Than Provided Floor Value

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsGreaterThan

testCase = TestCase.forInteractiveUse;
```

Test that the actual value is greater than two.

```
actVal = 3;
testCase.verifyThat(actVal, IsGreaterThan(2))
```

```
Interactive verification passed.
```

Test that the actual value is greater than three.

```
testCase.verifyThat(actVal, IsGreaterThan(3))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsGreaterThan failed.
--> The value must be greater than the minimum value.

Actual double:
         3
Minimum Value (Exclusive):
         3
```

The actual value is equal to, not greater than, three.

Test that each element in the actual value array is greater than four.

```
actVal = [5 6 7];
testCase.verifyThat(actVal, IsGreaterThan(4))
```

```
Interactive verification passed.
```

Test that each element in the actual value matrix is greater than four.

```
actVal = [1 2 3; 4 5 6];
testCase.verifyThat(actVal, IsGreaterThan(4))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsGreaterThan failed.
--> Each element must be greater than the minimum value.

    Failing Indices:
             1     2     3     5

Actual double:
         1     2     3
         4     5     6
Minimum Value (Exclusive):
         4
```

The matrix contains four elements with a value less than or equal to four.

Test that the actual value, 5, is greater than every element in an array.

```
testCase.verifyThat(5, IsGreaterThan([1 2 3]))
```

```
Interactive verification passed.
```

Test that elements in the actual value array are greater than the corresponding floor values.

```
testCase.verifyThat([5 -3 2], IsGreaterThan([4 -9 0]))
```

```
Interactive verification passed.
```

Repeat the test, this time negating the first actual value element.

```
testCase.verifyThat([-5 -3 2], IsGreaterThan([4 -9 0]))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsGreaterThan failed.
--> Each element must be greater than each corresponding element of the minimum value a
```

```
    Failing Indices:
             1

Actual double:
        -5    -3     2
Minimum Value (Exclusive):
         4    -9     0
```

The negated element is less than four.

See Also

See Also

`gt` | IsGreaterThanOrEqualTo | IsLessThan | IsLessThanOrEqualTo

matlab.unittest.constraints.IsGreaterThanOrEqualTo class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying value greater than or equal to another value

Construction

`IsGreaterThanOrEqualTo(floorVal)` creates a constraint specifying that an actual value is greater than or equal to another value. The constraint is satisfied if the actual value array is greater than or equal to the specified floor value, `floorVal`. The actual value is greater than or equal to `floorVal` only if the result of the expression `actual >= floorVal` is nonempty and all values are true.

Input Arguments

`floorVal`

Minimum value to satisfy the constraint.

Properties

`FloorValue`

Minimum value to satisfy the constraint. Set this property through the constructor via the `floorVal` input argument.

Methods

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Is Greater Than or Equal to Provided Floor Value

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsGreaterThanOrEqualTo

testCase = TestCase.forInteractiveUse;
```

Test that the actual value is greater than or equal to two.

```
actVal = 3;
testCase.verifyThat(actVal, IsGreaterThanOrEqualTo(2))
```

```
Interactive verification passed.
```

Test that the actual value is greater than or equal to three.

```
testCase.verifyThat(actVal, IsGreaterThanOrEqualTo(3))
```

```
Interactive verification passed.
```

Test that each element in the actual value array is greater than or equal to four.

```
actVal = [5 6 7];
testCase.verifyThat(actVal, IsGreaterThanOrEqualTo(4))
```

```
Interactive verification passed.
```

Test that each element in the actual value matrix is greater than or equal to four.

```
actVal = [1 2 3; 4 5 6];
testCase.verifyThat(actVal, IsGreaterThanOrEqualTo(4))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsGreaterThanOrEqualTo failed.
--> Each element must be greater than or equal to the minimum value.
```

```
    Failing Indices:
              1     3     5

Actual double:
         1     2     3
         4     5     6
Minimum Value (Inclusive):
         4
```

The matrix contains three elements that are greater than or equal to four.

Test that the actual value, 5, is greater than or equal to every element in an array.

```
testCase.verifyThat(5, IsGreaterThanOrEqualTo([1 2 3 5]))
```

```
Interactive verification passed.
```

Test that elements in the actual value array are greater than or equal to the corresponding floor values.

```
testCase.verifyThat([5 -3 0], IsGreaterThanOrEqualTo([4 -9 0]))
```

```
Interactive verification passed.
```

Repeat the test, this time negating the first actual value element.

```
testCase.verifyThat([-5 -3 0], IsGreaterThanOrEqualTo([4 -9 0]))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsGreaterThanOrEqualTo failed.
--> Each element must be greater than or equal to each corresponding element of the mi

    Failing Indices:
              1

Actual double:
        -5    -3     0
Minimum Value (Inclusive):
         4    -9     0
```

The negated element is less than or equal to four.

See Also

See Also

`ge` | IsGreaterThan | IsLessThan | IsLessThanOrEqualTo

matlab.unittest.constraints.IsEqualTo class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

General constraint to compare for equality

Description

The `IsEqualTo` class creates a constraint that compares data for equality. The type of comparison it uses is governed by the data type of the expected value. First, the testing framework checks if the expected value is an object. This check is performed first because it is possible for the object to have overridden methods that are used in subsequent checks (e.g. `islogical`). The following list categorizes and describes the various tests.

Data Type	Equality Comparison Method
MATLAB & Java Objects	If the expected value is a MATLAB or Java object, the `IsEqualTo` constraint calls the `isequaln` method if it is defined on the expected value object, otherwise it calls `isequal`. If the check returns false and a supported tolerance is specified, the `IsEqualTo` constraint checks the actual and expected values for equivalent class, size, and sparsity before determining if the values are within the tolerance.
Logicals	If the expected value is a `logical`, the constraint checks the actual and expected values for equivalent sparsity. If the sparsity matches, the constraint compares the values with the `isequal` method. Otherwise, the constraint is not satisfied.
Numerics	If the expected value is `numeric`, the constraint checks the actual and expected values for equivalent class, size, and sparsity. If the all these checks match, the constraint uses the `isequaln` method for comparison. If `isequaln` returns `true`, the constraint is satisfied. If the complexity does not match or `isequaln` returns `false`, and a supported tolerance is supplied, the constraint uses the tolerance in the comparison. Otherwise, the constraint is not satisfied.
Strings	If the expected value is a `string`, the constraint uses the `strcmp` function to check the actual and expected values for equality. However, if the `IgnoreCase` property is true, the strings are compared using `strcmpi`. If the `IgnoreWhitespace` is `true`, all whitespace characters

Data Type	Equality Comparison Method
	are removed from the actual and expected strings before passing them to `strcmp` or `strcmpi`.
Structures	If the expected value is a `struct`, the constraint compares the field count of the actual and expected values. If not equal, the constraint is not satisfied. Otherwise, each field of the expected value `struct` must exist on the actual value `struct`. If any field names are different, the constraint is not satisfied. Then, the constraint recursively compares the fields in a depth first examination. The recursion continues until a fundamental data type is encountered (that is, logical, numeric, string, or object), and then the values are compared as described above.
Cell Arrays	If the expected value is a cell array, the constraint checks the actual and expected values for size equality. If they are not equal in size, the constraint is not satisfied. Otherwise, each element of the array is recursively compared in a manner identical to fields in a structure, described above.
Tables	If the expected value is a `table`, the actual and expected values are checked for class equality, size equality, and for equal table properties. If they are not equal in class, size, or table properties, the constraint is not satisfied. Then, the constraint recursively compares each row of the table in a depth first examination. The recursion continues until a fundamental data type is encountered (that is, logical, numeric, string, or object), and then the values are compared as described above.

Construction

`IsEqualTo(expVal)` provides a general constraint to compare for equality.

`IsEqualTo(expVal,Name,Value)` provides a constraint with additional options specified by one or more `Name,Value` pair arguments. `Name` must appear inside single quotes (`''`). You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Input Arguments

`expVal`

The expected value that is compared to the actual value.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'IgnoringCase'`

Indicator if the constraint is insensitive to case, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

`'IgnoringFields'`

Fields to ignore during struct comparison, specified as a cell array of character vectors.

Default: (empty)

`'IgnoringWhitespace'`

Indicator if the constraint is insensitive to whitespace, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

`'Using'`

Particular comparator to use for constraint construction, specified as a `matlab.unittest.constraints.Comparator` object

Default: (empty)

`'Within'`

Tolerance to use in constraint construction, specified as a `matlab.unittest.constraints.Tolerance` object

Default: (empty)

Properties

Comparator

Specific comparator used in construction of the constraint, specified as a `matlab.unittest.constraints.Comparator` object in the name-value pair argument, `'Using'`.

Expected

The expected value that is compared to the actual value specified in the `expVal` input argument.

IgnoreCase

Indicator if the constraint is insensitive to case, specified in the name-value pair argument, `'IgnoringCase'`. This property applies at all levels of recursion, such as nested structures.

IgnoredFields

Fields to ignore during struct comparison, specified in the name-value pair argument, `'IgnoringFields'`.

IgnoreWhitespace

Indicator if the constraint is insensitive to whitespace, specified in the name-value pair argument, `'IgnoringWhitespace'`. This property applies at all levels of recursion, such as nested structures.

Tolerance

Specific tolerance used in construction of the constraint, specified as a `matlab.unittest.constraints.Tolerance` object in the name-value pair argument, `'Within'`. This property applies at all levels of recursion, such as nested structures.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test Numerics for Equality

Create a `TestCase` for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.AbsoluteTolerance
import matlab.unittest.constraints.RelativeTolerance

testCase = TestCase.forInteractiveUse;
```

Verify that an actual value of 5 is equal to the expected value.

```
expVal = 5;
testCase.verifyThat(5,IsEqualTo(expVal))
```

```
Interactive verification passed.
```

Assume that the actual value is 4.95. Verify that the difference between the actual value and expected value is less than 0.09.

```
testCase.verifyThat(4.95,IsEqualTo(expVal,'Within',AbsoluteTolerance(0.09)))
```

```
Interactive verification passed.
```

Assume that the actual value is 4.9. Verify that the difference between the actual and expected value is less than 1%.

```
testCase.verifyThat(4.9,IsEqualTo(expVal,'Within',RelativeTolerance(0.01)))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> NumericComparator failed.
    --> The values are not equal using "isequaln".
    --> RelativeTolerance failed.
        --> The error was not within relative tolerance.
        --> Failure table:
            value =
```

```
                1×5 table array

                  Actual    Expected           Error              RelativeError       Rel
                  ______    ________    ___________________    ___________________    ___

                  4.9       5           -0.0999999999999996    -0.0199999999999999    0.0

    Actual double:
           4.900000000000000
    Expected double:
             5
```

The two values differ by more than 1%.

Test Floating Point Calculation with Tolerance

Create a `TestCase` for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.RelativeTolerance

testCase = TestCase.forInteractiveUse;
```

Test that `0.1*3 = 0.3`.

```
act = 0.1*3;
exp = 0.3;
testCase.verifyThat(act, IsEqualTo(exp))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> NumericComparator failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                  Actual    Expected           Error                RelativeError
                  ______    ________    ____________________    ____________________

                  0.3       0.3         5.55111512312578e-17    1.85037170770859e-16
```

```
Actual double:
       0.300000000000000
Expected double:
       0.300000000000000
```

This test fails due to round off error in floating point arithmetic.

Perform the comparison of floating point numbers using a tolerance. Test that `0.1*3 = 0.3` within a relative tolerance of `2*eps`.

```
testCase.verifyThat(act, IsEqualTo(exp, ...
    'Within', RelativeTolerance(2*eps)))
```

```
Interactive verification passed.
```

Test Strings for Equality

Create a `TestCase` for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo

testCase = TestCase.forInteractiveUse;
```

Verify that two character vectors are equal.

```
expVal = 'Hello';
testCase.verifyThat('Hello',IsEqualTo(expVal))
```

```
Interactive verification passed.
```

Change the case of the actual value and test for equality.

```
testCase.verifyThat('hello',IsEqualTo(expVal))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> StringComparator failed.
    --> The character arrays are not equal.

    Actual char:
```

```
        hello
    Expected char:
        Hello
```

Ignore case and test again.

```
testCase.verifyThat('hello',IsEqualTo(expVal,'IgnoringCase',true))
```

```
Interactive verification passed.
```

Ignore whitespace and test two character vectors.

```
expVal = 'a bc';
testCase.verifyThat('abc',IsEqualTo(expVal,'IgnoringWhitespace',true))
testCase.verifyThat('ab c',IsEqualTo(expVal,'IgnoringWhitespace',true))
```

```
Interactive verification passed.
Interactive verification passed.
```

Test Objects for Equality Using Comparator

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.RelativeTolerance
import matlab.unittest.constraints.PublicPropertyComparator

testCase = TestCase.forInteractiveUse;
```

Define actual and expected `timeseries` objects. Perturb one of the actual data points by 1%.

```
expected = timeseries(1:10);
actual = expected;
actual.Data(7) = 1.01*actual.Data(7);
```

Test that the actual and expected values are equal within a relative tolerance of 2%.

```
testCase.verifyThat(actual, IsEqualTo(expected,...
    'Within', RelativeTolerance(.02)))
```

```
Interactive verification failed.

---------------------
```

```
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> ObjectComparator failed.
    --> The objects are not equal using "isequal".
    --> The tolerance was ignored. The tolerance as specified does not support compari

    Actual timeseries:
          timeseries

          Common Properties:
                    Name: 'unnamed'
                    Time: [10x1 double]
                TimeInfo: [1x1 tsdata.timemetadata]
                    Data: [1x1x10 double]
                DataInfo: [1x1 tsdata.datametadata]

          More properties, Methods
    Expected timeseries:
          timeseries

          Common Properties:
                    Name: 'unnamed'
                    Time: [10x1 double]
                TimeInfo: [1x1 tsdata.timemetadata]
                    Data: [1x1x10 double]
                DataInfo: [1x1 tsdata.datametadata]

          More properties, Methods
```

Use the `PublicPropertyComparator` in the construction of the constraint.

```
testCase.verifyThat(actual, IsEqualTo(expected,...
    'Within', RelativeTolerance(.02),...
    'Using', PublicPropertyComparator.supportingAllValues))
```

```
Interactive verification passed.
```

The test passes because the `PublicPropertyComparator` compares each public property individually instead of comparing the object all at once. In the former test, the `ObjectComparator` compares `timeseries` objects, and therefore relies on the `isequal` method of the `timeseries` class. Due to the perturbation in the actual `timeseries`, `isequal` returns `false`. The comparator does not apply the tolerance because the double-valued tolerance cannot apply directly to the `timeseries` object. In the latter

test, the comparator applies the tolerance to each public property that contains double-valued data.

See Also

See Also

matlab.unittest.constraints.Constraint | matlab.unittest.constraints.Tolerance

Introduced in R2013a

matlab.unittest.constraints.IsInstanceOf class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying inclusion in given class hierarchy

Construction

`IsInstanceOf(class)` provides a constraint specifying inclusion in a given class hierarchy. The constraint is satisfied if the actual value instance passes the "isa" relationship with `class` .

Input Arguments

`class`

Class name that the actual value must derive from or be an instance of to satisfy the constraint, specified as a fully qualified class name represented by a character vector or a `meta.class` instance.

Properties

`Class`

Class name that the actual value must derive from or be an instance of to satisfy the constraint. Set this property through the constructor via the `class` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Is Instance of Specified Class

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsInstanceOf

testCase = TestCase.forInteractiveUse;
```

Verify that the actual value, 5, is an instance of the double class.

```
testCase.verifyThat(5, IsInstanceOf('double'))
```

```
Interactive verification passed.
```

Repeat the test using an instance of `meta.class` instead of a character vector.

```
testCase.verifyThat(5, IsInstanceOf(?double))
```

```
Interactive verification passed.
```

Assert that zero is an instance of the logical class.

```
testCase.assertThat(0, IsInstanceOf('logical'))
```

```
Interactive assertion failed.

----------------------
Framework Diagnostic:
----------------------
IsInstanceOf failed.
--> The value must be an instance of the expected type.

    Actual Class:
        double
    Expected Type:
        logical

Actual Value:
         0
Assertion failed.
```

Verify that `@sin` is a function handle.

```
testCase.verifyThat(@sin, IsInstanceOf(?function_handle))
```

```
Interactive verification passed.
```

Verify that `name` is an instance of the `char` class.

```
name = 42;
testCase.verifyThat(name, IsInstanceOf('char'))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsInstanceOf failed.
--> The value must be an instance of the expected type.

    Actual Class:
        double
    Expected Type:
        char

Actual Value:
        42
```

Test That Derived Class Is Instance of Specified Class

In a file in your working folder, create a class, `DerivedExample`, that inherits from the `handle` class.

```
classdef DerivedExample < handle
end
```

At the command prompt, create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsInstanceOf

testCase = TestCase.forInteractiveUse;
```

Verify that an instance of the `DerivedExample` class is an instance of a `handle`.

```
exObj = DerivedExample;
testCase.verifyThat(exObj, IsInstanceOf(?handle))
```

```
Interactive verification passed.
```

Even though `exObj` is not an instance of the `handle` class, the verification passes because it derives from the `handle` class.

See Also

See Also

`isa` | IsOfClass

matlab.unittest.constraints.IsLessThan class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying value less than another value

Construction

`IsLessThan(ceilVal)` creates a constraint specifying that an actual value is less than another value. The constraint is satisfied if the actual value array is less than the specified ceiling value, `ceilVal`. The actual value is less than `ceilVal` only if the result of the expression `actual < ceilVal` is nonempty and all values are true.

Input Arguments

`ceilVal`

Smallest value that fails the constraint.

Properties

`CeilingValue`

Smallest value that fails the constraint. Set this property through the constructor via the `ceilVal` input argument.

Methods

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Is Less Than Provided Ceiling Value

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsLessThan

testCase = TestCase.forInteractiveUse;
```

Test that the actual value is less than four.

```
actVal = 3;
testCase.verifyThat(actVal, IsLessThan(4))
```

```
Interactive verification passed.
```

Test that the actual value is less than three.

```
testCase.verifyThat(actVal, IsLessThan(3))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsLessThan failed.
--> The value must be less than the maximum value.

Actual double:
         3
Maximum Value (Exclusive):
         3
```

The actual value is equal to, not less than, three.

Test that each element in the actual value array is less than four.

```
actVal = [1 2 3];
testCase.verifyThat(actVal, IsLessThan(4))
```

```
Interactive verification passed.
```

Test that each element in the actual value matrix is less than four.

```
actVal = [1 2 3; 4 5 6];
testCase.verifyThat(actVal, IsLessThan(4))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsLessThan failed.
--> Each element must be less than the maximum value.

    Failing Indices:
             2     4     6

Actual double:
         1     2     3
         4     5     6
Maximum Value (Exclusive):
         4
```

The matrix contains three elements that are greater than or equal to four.

Test that the actual value, 0, is less than every element in an array.

```
testCase.verifyThat(0, IsLessThan([1 2 3]))
```

```
Interactive verification passed.
```

Test that elements in the actual value array are less than the corresponding ceiling values.

```
testCase.verifyThat([4 -9 0], IsLessThan([5 -3 2]))
```

```
Interactive verification passed.
```

Repeat the test, this time negating the second actual value element.

```
testCase.verifyThat([4 9 0], IsLessThan([5 -3 2]))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsLessThan failed.
--> Each element must be less than each corresponding element of the maximum value arra
```

```
    Failing Indices:
             2

Actual double:
         4     9     0
Maximum Value (Exclusive):
         5    -3     2
```

The negated element is greater than `-3`.

See Also

See Also

IsGreaterThan | IsGreaterThanOrEqualTo | IsLessThanOrEqualTo | `lt`

matlab.unittest.constraints.IsLessThanOrEqualTo class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying value less than or equal to another value

Construction

`IsLessThanOrEqualTo(ceilVal)` creates a constraint specifying that an actual value is less than or equal to another value. The constraint is satisfied if the actual value array is less than or equal to the specified ceiling value, `ceilVal`. The actual value is less than or equal to `ceilVal` only if the result of the expression `actual <= ceilVal` is nonempty and all values are true.

Input Arguments

`ceilVal`

Maximum value to satisfy the constraint.

Properties

`CeilingValue`

Maximum value to satisfy the constraint. Set this property through the constructor via the `ceilVal` input argument.

Methods

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Is Less Than or Equal to Provided Ceiling Value

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsLessThanOrEqualTo

testCase = TestCase.forInteractiveUse;
```

Test that the actual value is less than or equal to four.

```
actVal = 3;
testCase.verifyThat(actVal, IsLessThanOrEqualTo(4))
```

```
Interactive verification passed.
```

Test that the actual value is less than or equal to three.

```
testCase.verifyThat(actVal, IsLessThanOrEqualTo(3))
```

```
Interactive verification passed.
```

Test that each element in the actual value array is less than or equal to four.

```
actVal = [1 2 3 4];
testCase.verifyThat(actVal, IsLessThanOrEqualTo(4))
```

```
Interactive verification passed.
```

Test that each element in the actual value matrix is less than or equal to four.

```
actVal = [1 2 3; 4 5 6];
testCase.verifyThat(actVal, IsLessThanOrEqualTo(4))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsLessThanOrEqualTo failed.
--> Each element must be less than or equal to the maximum value.
```

```
    Failing Indices:
              4     6

Actual double:
         1     2     3
         4     5     6
Maximum Value (Inclusive):
         4
```

The matrix contains two elements that are greater than four.

Test that the actual value, 1, is less than or equal to every element in an array.

```
testCase.verifyThat(1, IsLessThanOrEqualTo([1 2 3]))
```

```
Interactive verification passed.
```

Test that elements in the actual value array are less than the corresponding ceiling values.

```
testCase.verifyThat([4 -9 2], IsLessThanOrEqualTo([5 -3 2]))
```

```
Interactive verification passed.
```

Repeat the test, this time negating the second actual value element.

```
testCase.verifyThat([4 9 2], IsLessThanOrEqualTo([5 -3 2]))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsLessThanOrEqualTo failed.
--> Each element must be less than or equal to each corresponding element of the maximu

    Failing Indices:
              2

Actual double:
         4     9     2
Maximum Value (Inclusive):
         5    -3     2
```

The negated element is greater than `-3`.

See Also

See Also

IsGreaterThan | IsGreaterThanOrEqualTo | IsLessThan | `le`

matlab.unittest.constraints.IsOfClass class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying class type

Construction

`IsOfClass(class)` provides a constraint specifying the class type. The constraint is satisfied if the actual value is the same class as `class` . The constraint is not satisfied if the actual value derives from `class`.

Input Arguments

`class`

Class name that must be matched by the actual value to satisfy the constraint, specified as a fully qualified class name represented by a character vector or a `meta.class` instance.

Properties

`Class`

Class name that must be matched by the actual value to satisfy the constraint. Set this property through the constructor via the `class` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Class Is Specified Class

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsOfClass

testCase = TestCase.forInteractiveUse;
```

Verify that the actual value, 5, is a double.

```
testCase.verifyThat(5, IsOfClass('double'))
```

```
Interactive verification passed.
```

Repeat the test using an instance of `meta.class` instead of a character vector.

```
testCase.verifyThat(5, IsOfClass(?double))
```

```
Interactive verification passed.
```

Assert that zero is an instance of the logical class.

```
testCase.assertThat(0, IsOfClass('logical'))
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
IsOfClass failed.
--> The value's class is incorrect.

    Actual Class:
        double
    Expected Class:
        logical

Actual Value:
         0
Assertion failed.
```

Verify that `@sin` is a function handle.

```
testCase.verifyThat(@sin, IsOfClass(?function_handle))
```

```
Interactive verification passed.
```

Verify that `name` is an instance of the `char` class.

```
name = 42;
testCase.verifyThat(name, IsOfClass('char'))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsOfClass failed.
--> The value's class is incorrect.

    Actual Class:
        double
    Expected Class:
        char

Actual Value:
        42
```

Test That Derived Class Is Instance of Specified Class

In a file in your working folder, create a class, `DerivedExample`, that inherits from the `handle` class.

```
classdef DerivedExample < handle
end
```

At the command prompt, create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsOfClass

testCase = TestCase.forInteractiveUse
```

Verify that an instance of the `DerivedExample` class is an instance of a `handle`.

```
exObj = DerivedExample;
testCase.verifyThat(exObj, IsOfClass(?handle))
```

```
Interactive verification failed.
```

```
---------------------
Framework Diagnostic:
---------------------
IsOfClass failed.
--> The value's class is incorrect.

    Actual Class:
        DerivedExample
    Expected Class:
        handle

Actual Value:
      DerivedExample with no properties.
```

Even though `exObj` derives from the `handle` class, it is not an instance of the `handle` class.

Verify that an instance of the `DerivedExample` class is an instance of a `DerivedExample`.

```
testCase.verifyThat(exObj, IsOfClass(?DerivedExample))
```

```
Interactive verification passed.
```

See Also

See Also

`class` | IsInstanceOf

matlab.unittest.constraints.IsReal class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying real valued array

Construction

`IsReal` provides a constraint specifying a real valued array. This constraint is satisfied only if the actual value contains only real values.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Array Is Real Valued

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsReal

testCase = TestCase.forInteractiveUse;
```

Verify that the values `5` and `5+0i` are real.

```
testCase.verifyThat(5, IsReal)
testCase.verifyThat(5+0i, IsReal)
```

```
Interactive verification passed.
Interactive verification passed.
```

Test if the imaginary number is real.

```
testCase.verifyThat(sqrt(-1), IsReal)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsReal failed.
--> The value must be real.

Actual Value:
      0.000000000000000 + 1.000000000000000i
```

The actual value is imaginary.

Assert that an array contains only real values.

```
testCase.assertThat([0 1 1 2 3 5 8 13], IsReal)
```

```
Interactive assertion passed.
```

Test that the array, `arr`, is real.

```
arr = [NaN -Inf];
testCase.verifyThat(arr, IsReal)
```

```
Interactive verification passed.
```

Multiply the array by a complex number and test that the values are not real.

```
testCase.verifyThat(42i*arr, ~IsReal)
```

```
Interactive verification passed.
```

See Also

See Also

`isreal`

matlab.unittest.constraints.IsSameHandleAs class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying handle instance same as another

Construction

`IsSameHandle(h)` provides a constraint specifying a handle instance or group of instances is same as another.

The constraint is satisfied only if each element of the actual value is the same instance as each corresponding element of `h`.

Input Arguments

h

`handle` object or array of `handle` objects. The actual value array passed to the qualification must be the same size as `h`.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test Handles for Equality

In a file in your working folder, create the following handle class for interactive testing.

```
classdef ExampleHandle < handle
end
```

At the command prompt, create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsSameHandleAs

testCase = TestCase.forInteractiveUse;
```

Instantiate two handles.

```
h1 = ExampleHandle;
h2 = ExampleHandle;
```

Verify that the handle, `h1`, is the same as `h1`.

```
testCase.verifyThat(h1, IsSameHandleAs(h1))
```

```
Interactive verification passed.
```

Test that `h1` is the same handle instance as `h2`.

```
testCase.verifyThat(h1, IsSameHandleAs(h2))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsSameHandleAs failed.
--> Values do not refer to the same handle.

Actual Value:
      ExampleHandle with no properties.
Expected Handle Object:
      ExampleHandle with no properties.
```

Test that two arrays of handles are the same instances.

```
expArr = [h1 h2 h1];
actArr = [h1 h2 h1];

testCase.verifyThat(expArr, IsSameHandleAs(actArr))
```

```
Interactive verification passed.
```

The arrays satisfy the constraint even though the elements within a particular array are not the same instance as each other.

Verify that the constraint is not satisfied if it expects a single handle and the actual value is an array of the same instances.

```
testCase.verifyThat([h1 h1], IsSameHandleAs(h1))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsSameHandleAs failed.
--> Sizes do not match.
     Actual Value Size           : [1  2]
     Expected Handle Object Size : [1  1]

Actual Value:
      1x2 ExampleHandle array with no properties.
Expected Handle Object:
      ExampleHandle with no properties.
```

Similarly, the constraint is not satisfied a single handle instance if it expects an array of handles.

```
testCase.verifyThat(h2, IsSameHandleAs([h2 h2]))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsSameHandleAs failed.
--> Sizes do not match.
     Actual Value Size           : [1  1]
     Expected Handle Object Size : [1  2]

Actual Value:
      ExampleHandle with no properties.
Expected Handle Object:
      1x2 ExampleHandle array with no properties.
```

See Also

See Also

handle | `eq` | IsEqualTo

matlab.unittest.constraints.IsScalar class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying scalar value

Construction

`IsScalar` provides a constraint that specifies a scalar value. The constraint is satisfied if the actual value is a scalar.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Is Scalar

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsScalar

testCase = TestCase.forInteractiveUse;
```

Verify that a value of zero satisfies the `IsScalar` constraint.

```
testCase.verifyThat(0,IsScalar)
```

```
Interactive verification passed.
```

Assert that a single object is scalar.

```
testCase.assertThat(timeseries(1),IsScalar)
```

```
Interactive verification passed.
```

Verify that a vector is not scalar.

```
testCase.verifyThat([2 3],IsScalar)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsScalar failed.
--> The value must be a scalar.
--> The value has a size of [1  2].

Actual Value:
         2     3
```

Assert that an empty structure does not satisfy the `IsScalar` constraint.

```
testCase.assertThat(struct([]),IsScalar)
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
IsScalar failed.
--> The value must be a scalar.
--> The value has a size of [0  0].

Actual Value:
    0x0 struct array with no fields.
Assertion failed.
```

See Also

See Also

HasElementCount | HasLength | HasSize | IsEmpty | `isscalar`

Introduced in R2014b

matlab.unittest.constraints.IsSparse class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying sparse array

Construction

`IsSparse` creates a constraint specifying a sparse array. This constraint is satisfied only when the actual value is sparse.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Array Is Sparse

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsSparse

testCase = TestCase.forInteractiveUse;
```

Create an identity matrix, and test if it is sparse.

```
F = eye(7);
testCase.verifyThat(F, IsSparse)
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
```

```
IsSparse failed.
--> The value must be sparse.

Actual Value:
         1     0     0     0     0     0     0
         0     1     0     0     0     0     0
         0     0     1     0     0     0     0
         0     0     0     1     0     0     0
         0     0     0     0     1     0     0
         0     0     0     0     0     1     0
         0     0     0     0     0     0     1
```

The matrix, F, is a full matrix.

Convert F to a sparse matrix and retest for sparsity.

```
S = sparse(F);
testCase.verifyThat(S, IsSparse)
```

```
Interactive verification passed.
```

See Also

See Also

issparse

matlab.unittest.constraints.IsSubsetOf class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying actual set is subset of expected set

Construction

`IsSubsetOf(expSet)` creates a constraint specifying that the actual value set is a subset of the expected value set. The constraint produces a qualification failure for any actual value set that is not a subset of the expected value set. An actual value set is considered a subset of the expected value set if `ismember(actSet,expSet)` contains all true values and the actual and expected values satisfy one of the following conditions:

- The actual and expected values are of the same class.
- The actual value is an object.
- The expected value is an object.

Input Arguments

`expSet` — Expected value set to compare to actual value set
depends on test values

Expected value set to compare to actual value set. The type of the input depends on the test values.

Properties

`Superset` — Superset of actual value set
depends on test values

Superset of the actual value set. The data type of the property depends on the test values. To satisfy the constraint, the actual value set must be a subset of `Superset`. Set this property through the constructor via the `expSet` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test if Actual Set Is Subset of Expected

Create a test case for interactive testing.

```
import matlab.unittest.TestCase;
import matlab.unittest.constraints.IsSubsetOf;

testCase = TestCase.forInteractiveUse;
```

Verify that the actual cell array is a subset of the expected set.

```
testCase.verifyThat({'c','b'}, IsSubsetOf({'a','b','c'}));
```

```
Interactive verification passed.
```

```
testCase.verifyThat({'a';'d'}, IsSubsetOf({'a','b','c'}));
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsSubsetOf failed.
--> The actual value contains 1 element(s) not found in the expected superset:
    --> Element at index 2 not found in the expected superset:
                'd'

Actual Value (cell):
        'a'
        'd'
Expected Superset (cell):
        'a'    'b'    'c'
```

Assert that a set of doubles is a subset of the expected set.

```
testCase.assertThat([25;209], IsSubsetOf(magic(21)));
```

```
Interactive assertion passed.
```

```
testCase.assertThat(25:33, IsSubsetOf(30:40));
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
IsSubsetOf failed.
--> The actual value contains 5 element(s) not found in the expected superset:
    --> Element at index 1 not found in the expected superset:
                25
    --> Element at index 2 not found in the expected superset:
                26
    --> Element at index 3 not found in the expected superset:
                27
    --> Element at index 4 not found in the expected superset:
                28
    --> Element at index 5 not found in the expected superset:
                29

Actual Value (double):
        25    26    27    28    29    30    31    32    33
Expected Superset (double):
        30    31    32    33    34    35    36    37    38    39    40
Assertion failed.
```

Verify that the rows of a table are a subset of the expected table.

```
actT = table([3,1]',{'C';'A'},logical([0;1]));
expT = table([1:2:5]',{'A';'C';'E'},logical([1;0;0]));
testCase.verifyThat(actT, IsSubsetOf(expT));
```

```
Interactive verification passed.
```

Test that if the actual and expected sets have different types, the `IsSubsetOf` constraint is not satisfied.

```
testCase.assumeThat(single(1:3), IsSubsetOf(0:5));
```

```
Interactive assumption failed.

---------------------
Framework Diagnostic:
```

```
---------------------
IsSubsetOf failed.
--> Classes do not match.

    Actual Class:
        single
    Expected Class:
        double

Actual Value (single):
         1     2     3
Expected Superset (double):
         0     1     2     3     4     5
Assumption failed.
```

See Also

See Also

matlab.unittest.constraints.IsSupersetOf | `ismember` | `matlab.unittest.constraints`

Introduced in R2016a

matlab.unittest.constraints.IsSubstringOf class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying substring of another string

Construction

`IsSubstringOf(superstring)` creates a constraint specifying a substring of another string scalar or character vector. The constraint is satisfied only if the actual value is contained within an expected superstring, `superstring`.

`IsSubstringOf(superstring,Name,Value)` provides a constraint with additional options specified by one or more `Name,Value` pair arguments. `Name` must appear inside single quotes (`''`). You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Input Arguments

`superstring`

Text that contains the actual value, specified as a string scalar or character vector. `superstring` can include newline characters.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`''`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'IgnoringCase'`

Indicator if the constraint is insensitive to case, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

`'IgnoringWhitespace'`

Indicator if the constraint is insensitive to whitespace, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

Properties

`IgnoreCase`

Indicator if the constraint is insensitive to case, specified in the name-value pair argument, `'IgnoringCase'`. This property applies at all levels of recursion, such as nested structures.

`IgnoreWhitespace`

Indicator if the constraint is insensitive to whitespace, specified in the name-value pair argument, `'IgnoringWhitespace'`. This property applies at all levels of recursion, such as nested structures.

`Superstring`

Superstring that includes the actual value, specified in the input argument, `superstring`.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Is Substring of Specified String

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
```

```
import matlab.unittest.constraints.IsSubstringOf

testCase = TestCase.forInteractiveUse;
```

Define the actual value string.

```
S = string('This Is One Long String');
```

Test that the actual value string, `'One'`, is contained in `S`.

```
testCase.verifyThat('One', IsSubstringOf(S))
```

```
Interactive verification passed.
```

Test that the actual value `'long'` is contained in `S`.

```
testCase.verifyThat('long', IsSubstringOf(S))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsSubstringOf failed.
--> The value is not found within the superstring.

Actual char:
    long
Expected Superstring:
    This Is One Long String
```

By default, the `IsSubstringOf` constraint is case sensitive.

Repeat the test ignoring case.

```
testCase.verifyThat('long', IsSubstringOf(S,...
    'IgnoringCase', true))
```

```
Interactive verification passed.
```

Test that the actual value `'thisisone'` is contained in `S`. For the test to pass, configure the constraint to ignore whitespace and case.

```
testCase.verifyThat('thisisone', IsSubstringOf(S, ...
    'IgnoringCase', true, 'IgnoringWhitespace', true))
```

```
Interactive verification passed.
```

Assert that the actual value `'longer'` is not contained in S.

```
testCase.assertThat('Longer', ~IsSubstringOf(S))
```

```
Interactive assertion passed.
```

See Also

See Also

ContainsSubstring | EndsWithSubstring | Matches | StartsWithSubstring

matlab.unittest.constraints.IssuesNoWarnings class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying function that issues no warnings

Construction

`outConstObj = IssuesNoWarnings` creates a constraint, `outConstObj`, specifying a function that issues no warnings when the testing framework invokes it. The constraint is satisfied if no warnings are issued when the testing framework invokes the function.

`outConstObj = IssuesNoWarnings('WhenNargoutIs', numOutputs)` creates a constraint that can determine if the actual value is a function handle that issues no warnings when the testing framework invokes it with a particular number of output arguments, `numOutputs`.

Input Arguments

`numOutputs`

Number of outputs the constraint requests when invoking the function handle, specified as a non-negative, real, scalar integer.

Default: `0`

Properties

`FunctionOutputs`

Output arguments produced at invocation of the supplied function handle, specified as a cell array. This property provides access to output arguments. It is read only and the testing framework sets it when it invokes the function handle. The number of outputs is determined by the `Nargout` property.

`Nargout`

Number of output arguments the instance uses when executing functions. Set this property through the constructor via the `numOutputs` input argument.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Instantiate `IssuesNoWarnings` Constraint

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IssuesNoWarnings

testCase = TestCase.forInteractiveUse;
```

Verify that a call to `true` does not result in any warning.

```
testCase.verifyThat(@true, IssuesNoWarnings)
```

```
Interactive verification passed.
```

Verify that a call to `size` with an empty array does not result in any warning. Examine the output arguments.

```
issuesNoWarningsConstraint = IssuesNoWarnings('WhenNargoutIs', 2);
testCase.verifyThat(@() size([]), issuesNoWarningsConstraint)
[actualOut1, actualOut2] = issuesNoWarningsConstraint.FunctionOutputs{:};
```

```
Interactive verification passed.
```

Verify that the constraint is not satisfied if the actual value is not a function handle.

```
testCase.verifyThat(5, IssuesNoWarnings)
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IssuesNoWarnings failed.
--> The value must be an instance of the expected type.
```

```
    Actual Class:
        double
    Expected Type:
        function_handle

Actual Value:
         5
```

Verify that the constraint is not satisfied if the actual value results in a warning.

```
testCase.verifyThat(@() warning('some:id', 'Message'), IssuesNoWarnings)
```

```
Warning: Message
> In @()warning('some:id','Message')
  In matlab.unittest.internal.constraints.FunctionHandleConstraint/invoke (line 36)
  In matlab.unittest.internal.constraints.WarningQualificationConstraint/invoke (line 3
  In matlab.unittest.constraints.IssuesNoWarnings/issuesNoWarnings (line 140)
  In matlab.unittest.constraints.IssuesNoWarnings/satisfiedBy (line 90)
  In matlab.unittest.internal.qualifications.QualificationDelegate/qualifyThat (line 62
  In matlab.unittest.qualifications.Verifiable/verifyThat (line 228)
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IssuesNoWarnings failed.
--> The function issued warnings.

    Warnings Issued:
        --> 'some:id'
                Message

Evaluated Function:
        @()warning('some:id','Message')
```

See Also

See Also

matlab.unittest.constraints.Constraint | matlab.unittest.constraints.IssuesWarnings | matlab.unittest.constraints.Throws | `warning`

matlab.unittest.constraints.IssuesWarnings class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying function that issues expected warning profile

Description

The `IssuesWarnings` class creates a constraint that issues an expected warning profile. The constraint is satisfied only if the actual value is a function handle that issues a specific set of warnings. You specify warnings using warning identifiers.

By default, the constraint only confirms that when the testing framework invokes the function handle, MATLAB issues the specified set of warnings. It ignores the number of times the warnings are issued, in what order they are issued, and whether or not any unspecified warnings are issued. However, you can set parameters to respect the order, the count, and the warning set. Alternatively, you can specify the exact warning profile for comparison.

Construction

`outConstObj = IssuesWarnings(warnArr)` creates a constraint, `outConstObj`, specifying a function that issues expected warnings, `warnArr`.

`outConstObj = IssuesWarnings(expVal,Name,Value)` creates a constraint with additional options specified by one or more `Name,Value` pair arguments. `Name` must appear inside single quotes (`''`). You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Input Arguments

`warnArr`

Warning identifiers expected when the testing framework invokes the function handle, specified as a cell array of warning identifiers. If `warnArr` is empty, the constructor throws an `MException`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'Exactly'`

Indicator if the value is a function handle that must issue a warning profile that is an exact match, specified as `false` or `true` (`logical` `0` or `1`). When this value is `false`, the instance relies on specification of other parameters and default instance behavior to determine the strictness of its comparison. When set to `true`, the instance requires the warning profile to be exactly the same as the specified warning profile.

Default: `false`

`'RespectingCount'`

Indicator whether to respect element counts, specified as `false` or `true` (`logical` `0` or `1`). When this value is `false`, the instance is insensitive to the number of occurrences of members and ignores their frequency. When set to `true`, the instance is sensitive to the total number of set members. This means that, in addition to ensuring that all of the specified warnings are issued, this instance is not satisfied if the number of times that a particular warning issues differs from the number of times that warning is specified in `warnArr`.

Default: `false`

`'RespectingOrder'`

Indicator whether to respect the order of elements, specified as `false` or `true` (`logical` `0` or `1`). When this value is `false`, the instance is insensitive to the order of the set members. When set to `true`, the instance is sensitive to the order of the set members. This means that this instance is not satisfied if the order of the issued warnings differs from the order the warnings are specified in `warnArr`.

The order of a given set of warnings is determined by trimming the warning profiles to a profile with no repeated adjacent warnings. For example, the warning profile `{id:A, id:A, id:B, id:C, id:C, id:C, id:A, id:A, id:A}` is trimmed to `{id:A, id:B, id:C, id:A}`.

When this constraint respects order, the order of the warnings that are issued and expected must match the order of the expected warning profile. Warnings issued that are not listed in `warnArr` are ignored when determining order.

Default: `false`

`'RespectingSet'`

Indicator whether to respect set elements, specified as `false` or `true` (`logical` `0` or `1`). When this value is `false`, the instance ignores additional set members. When set to `true`, the instance is sensitive to additional set members. This means that, in addition to ensuring that all of the specified warnings are issued, this instance is not satisfied if any extra, unspecified warnings are issued.

Default: `false`

`'WhenNargoutIs'`

Number of outputs the constraint should request when invoking the function handle, specified as a non-negative, real, scalar integer.

Default: `0`

Properties

`Exact`

Indicator of whether the constraint performs exact comparisons. Set this property through the constructor via the name-value pair argument, `'Exactly'`.

`ExpectedWarnings`

Expected warning identifiers. Set this read-only property through the constructor via the `warnArr` input argument.

`FunctionOutputs`

Output arguments produced at invocation of the supplied function handle, specified as a cell array. This property provides access to output arguments. It is read only and the

testing framework sets it when it invokes the function handle. The number of outputs is determined by the `Nargout` property.

`Nargout`

Number of output arguments the instance uses when it executes functions. Set this property through the constructor via the name-value pair argument, `'WhenNargoutIs'`.

`RespectCount`

Indicator if the constraint respects the element counts, specified through the constructor via the name-value pair argument, `'RespectingCount'`.

`RespectOrder`

Indicator if the constraint respects the order of elements, specified through the constructor via the name-value pair argument, `'RespectingOrder'`.

`RespectSet`

Indicator if the constraint respects set elements, specified through the constructor via the name-value pair argument, `'RespectingSet'`.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Instantiate `IssuesWarnings` Constraint

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IssuesWarnings

testCase = TestCase.forInteractiveUse;
```

Create a helper anonymous function for use in this example. Create several warning identifiers.

```
issueWarnings = @(idCell) cellfun(@(id) warning(id,'Message'), idCell);
firstID =   'first:id';
secondID =  'second:id';
thirdID =   'third:id';
```

Verify that the helper function issues a particular warning.

```
testCase.verifyThat(@() issueWarnings({firstID}),...
    IssuesWarnings({firstID}))
```

```
Interactive verification passed.
```

Verify the function issues a warning ignoring count, warning set, and order.

```
testCase.verifyThat(@() issueWarnings({firstID, thirdID, secondID,...
    firstID}), IssuesWarnings({secondID, firstID}))
```

```
Interactive verification passed.
```

Verify the function issues a warning while respecting the warning set.

```
testCase.verifyThat(@() issueWarnings({firstID, thirdID, secondID,...
    firstID}), IssuesWarnings({firstID, secondID, thirdID}, ...
    'RespectingSet', true))
```

```
Interactive verification passed.
```

Verify the function issues a warning while respecting the warning count.

```
testCase.verifyThat(@() issueWarnings({secondID, firstID, thirdID,...
    secondID}), IssuesWarnings({firstID, secondID, secondID}, ...
    'RespectingCount', true))
```

```
Interactive verification passed.
```

Verify the function issues a warning while respecting the warning order.

```
testCase.verifyThat(@() issueWarnings({firstID, secondID, secondID,...
    thirdID}), IssuesWarnings({firstID, secondID}, 'RespectingOrder', true))
```

```
Interactive verification passed.
```

Verify the function issues an exact match to the expected warning profile.

```
testCase.verifyThat(@() issueWarnings({firstID, secondID, secondID,...
    thirdID}), IssuesWarnings({firstID, secondID, secondID, thirdID}, ...
    'Exactly', true))
```

```
Interactive verification passed.
```

Verify that the constraint is not satisfied if the actual value is not a function handle.

```
testCase.verifyThat(5, IssuesWarnings({firstID}))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IssuesWarnings failed.
--> The value must be an instance of the expected type.

    Actual Class:
        double
    Expected Type:
        function_handle

Actual Value:
         5
```

Verify that the constraint is not satisfied if the function does not issue a warning.

```
testCase.verifyThat(@rand, IssuesWarnings({firstID}))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IssuesWarnings failed.
--> The function handle did not issue a correct warning profile.
    The expected warning profile ignores:
      Set
      Count
      Order
    --> The function handle did not issue any warnings.
```

```
    Expected Warning Profile:
        --> 'first:id'

Evaluated Function:
        @rand
```

Verify that the constraint is not satisfied if the function issues a non-specified warning identifier.

```
testCase.verifyThat(@() issueWarnings({firstID}), IssuesWarnings({secondID}))
```

```
Warning: Message
> In @(id)warning(id,'Message')
  In @(idCell)cellfun(@(id)warning(id,'Message'),idCell)
  In @()issueWarnings({firstID})
  In matlab.unittest.internal.constraints.FunctionHandleConstraint/invoke (line 36)
  In matlab.unittest.internal.constraints.WarningQualificationConstraint/invoke (line 3
  In matlab.unittest.constraints.IssuesWarnings/invoke (line 431)
  In matlab.unittest.constraints.IssuesWarnings/invokeCapturingOutput (line 510)
  In matlab.unittest.constraints.IssuesWarnings/issuesExpectedWarnings (line 519)
  In matlab.unittest.constraints.IssuesWarnings/satisfiedBy (line 239)
  In matlab.unittest.internal.qualifications.QualificationDelegate/qualifyThat (line 62
  In matlab.unittest.qualifications.Verifiable/verifyThat (line 228)
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IssuesWarnings failed.
--> The function handle did not issue a correct warning profile.
    The expected warning profile ignores:
      Set
      Count
      Order
    --> The function handle did not issue the correct warnings.

        Missing Warnings:
            --> 'second:id'

    Actual Warning Profile:
        --> 'first:id'
    Expected Warning Profile:
        --> 'second:id'

Evaluated Function:
```

```
        @()issueWarnings({firstID})
```

Consider the following actual value and warning array.

```
actVal = @() issueWarnings({firstID, firstID, secondID, firstID});
warnArr = {firstID, secondID, firstID, firstID};
```

Test whether the warning array is exactly the same as the expected array.

```
testCase.verifyThat(actVal, IssuesWarnings(warnArr, 'Exactly', true))
```

```
Warning: Message
> In @(id)warning(id,'Message')
  In @(idCell)cellfun(@(id)warning(id,'Message'),idCell)
  In @()issueWarnings({firstID,firstID,secondID,firstID})
  In matlab.unittest.internal.constraints.FunctionHandleConstraint/invoke (line 36)
  In matlab.unittest.internal.constraints.WarningQualificationConstraint/invoke (line 3
  In matlab.unittest.constraints.IssuesWarnings/invoke (line 431)
  In matlab.unittest.constraints.IssuesWarnings/invokeCapturingOutput (line 510)
  In matlab.unittest.constraints.IssuesWarnings/issuesExpectedWarnings (line 519)
  In matlab.unittest.constraints.IssuesWarnings/satisfiedBy (line 239)
  In matlab.unittest.internal.qualifications.QualificationDelegate/qualifyThat (line 62
  In matlab.unittest.qualifications.Verifiable/verifyThat (line 228)
Warning: Message
> In @(id)warning(id,'Message')
  In @(idCell)cellfun(@(id)warning(id,'Message'),idCell)
  In @()issueWarnings({firstID,firstID,secondID,firstID})
  In matlab.unittest.internal.constraints.FunctionHandleConstraint/invoke (line 36)
  In matlab.unittest.internal.constraints.WarningQualificationConstraint/invoke (line 3
  In matlab.unittest.constraints.IssuesWarnings/invoke (line 431)
  In matlab.unittest.constraints.IssuesWarnings/invokeCapturingOutput (line 510)
  In matlab.unittest.constraints.IssuesWarnings/issuesExpectedWarnings (line 519)
  In matlab.unittest.constraints.IssuesWarnings/satisfiedBy (line 239)
  In matlab.unittest.internal.qualifications.QualificationDelegate/qualifyThat (line 62
  In matlab.unittest.qualifications.Verifiable/verifyThat (line 228)
Warning: Message
> In @(id)warning(id,'Message')
  In @(idCell)cellfun(@(id)warning(id,'Message'),idCell)
  In @()issueWarnings({firstID,firstID,secondID,firstID})
  In matlab.unittest.internal.constraints.FunctionHandleConstraint/invoke (line 36)
  In matlab.unittest.internal.constraints.WarningQualificationConstraint/invoke (line 3
  In matlab.unittest.constraints.IssuesWarnings/invoke (line 431)
  In matlab.unittest.constraints.IssuesWarnings/invokeCapturingOutput (line 510)
  In matlab.unittest.constraints.IssuesWarnings/issuesExpectedWarnings (line 519)
  In matlab.unittest.constraints.IssuesWarnings/satisfiedBy (line 239)
```

```
  In matlab.unittest.internal.qualifications.QualificationDelegate/qualifyThat (line 62
  In matlab.unittest.qualifications.Verifiable/verifyThat (line 228)
Warning: Message
> In @(id)warning(id,'Message')
  In @(idCell)cellfun(@(id)warning(id,'Message'),idCell)
  In @()issueWarnings({firstID,firstID,secondID,firstID})
  In matlab.unittest.internal.constraints.FunctionHandleConstraint/invoke (line 36)
  In matlab.unittest.internal.constraints.WarningQualificationConstraint/invoke (line 3
  In matlab.unittest.constraints.IssuesWarnings/invoke (line 431)
  In matlab.unittest.constraints.IssuesWarnings/invokeCapturingOutput (line 510)
  In matlab.unittest.constraints.IssuesWarnings/issuesExpectedWarnings (line 519)
  In matlab.unittest.constraints.IssuesWarnings/satisfiedBy (line 239)
  In matlab.unittest.internal.qualifications.QualificationDelegate/qualifyThat (line 62
  In matlab.unittest.qualifications.Verifiable/verifyThat (line 228)
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IssuesWarnings failed.
--> The function handle did not issue a correct warning profile.
    The expected warning profile must match exactly.
    --> The function handle did not issue the exact warning profile expected.

    Actual Warning Profile:
        --> 'first:id'
        --> 'first:id'
        --> 'second:id'
        --> 'first:id'
    Expected Warning Profile:
        --> 'first:id'
        --> 'second:id'
        --> 'first:id'
        --> 'first:id'

Evaluated Function:
        @()issueWarnings({firstID,firstID,secondID,firstID})
```

Test whether the warning array is the same as the expected array when respecting set, order and count.

```
testCase.verifyThat(actVal, IssuesWarnings(warnArr,...
    'RespectingSet',true,'RespectingOrder',true,'RespectingCount',true))
```

```
Interactive verification passed.
```

In this example, a constraint that specifies a warning profile that respects set, order and count is not the same as one that specifies an exact warning profile.

See Also

See Also

matlab.unittest.constraints.IssuesNoWarnings | matlab.unittest.constraints.Throws | `warning`

Topics

"Message Identifiers"

matlab.unittest.constraints.IsSupersetOf class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying actual set is superset of expected set

Construction

`IsSupersetOf(expSet)` creates a constraint specifying that the actual value set is a superset of the expected value set. The constraint produces a qualification failure for any actual value set that is not a superset of the expected value set. An actual value set is considered a superset of the expected value set if `ismember(expSet,actSet)` contains all true values and the actual and expected values satisfy one of the following conditions:

- The actual and expected values are of the same class.
- The actual value is an object.
- The expected value is an object.

Input Arguments

`expSet` — Expected value set to compare to actual value set
depends on test values

Expected value set to compare to actual value set. The type of the input depends on the test values.

Properties

`Subset` — Subset of actual value set
depends on test values

Subset of the actual value set. The data type of the property depends on the test values. To satisfy the constraint, the actual value set must be a superset of `Subset`. Set this property through the constructor via the `expSet` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test if Actual Set Is Superset of Expected

Create a test case for interactive testing.

```
import matlab.unittest.TestCase;
import matlab.unittest.constraints.IsSupersetOf;

testCase = TestCase.forInteractiveUse;
```

Verify that the actual cell array is a subset of the expected set.

```
testCase.verifyThat({'a','b','c'}, IsSupersetOf({'c';'b'}));
```

```
Interactive verification passed.
```

```
testCase.verifyThat({'a','b','c'}, IsSupersetOf({'a','d'}));
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsSupersetOf failed.
--> The expected subset contains 1 element(s) not found in the actual value:
    --> Element at index 2 not found in the actual value:
                'd'

Actual Value (cell):
        'a'    'b'    'c'
Expected Subset (cell):
        'a'    'd'
```

Assert that a set of doubles is a subset of the expected set.

```
testCase.assertThat(magic(21), IsSupersetOf([25;209]));
```

```
Interactive assertion passed.
```

```
testCase.assertThat(25:33, IsSupersetOf(30:40));
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
IsSupersetOf failed.
--> The expected subset contains elements not found in the actual value (First 5 of 7)
    --> Element at index 5 not found in the actual value:
                34
    --> Element at index 6 not found in the actual value:
                35
    --> Element at index 7 not found in the actual value:
                36
    --> Element at index 8 not found in the actual value:
                37
    --> Element at index 9 not found in the actual value:
                38

Actual Value (double):
        25    26    27    28    29    30    31    32    33
Expected Subset (double):
        30    31    32    33    34    35    36    37    38    39    40
Assertion failed.
```

Verify that the rows of a table are a subset of the expected table.

```
actT = table([1:2:5]',{'A';'C';'E'},logical([1;0;0]));
expT = table([3,1]',{'C';'A'},logical([0;1]));
testCase.verifyThat(actT, IsSupersetOf(expT));
```

```
Interactive verification passed.
```

Test that if the actual and expected sets have different types, the `IsSubsetOf` constraint is not satisfied.

```
testCase.assumeThat(single(0:5), IsSupersetOf(1:3));
```

```
Interactive assumption failed.

---------------------
Framework Diagnostic:
```

```
---------------------
IsSupersetOf failed.
--> Classes do not match.

    Actual Class:
        single
    Expected Class:
        double

Actual Value (single):
         0     1     2     3     4     5
Expected Subset (double):
         1     2     3
Assumption failed.
```

See Also

See Also

matlab.unittest.constraints.IsSubsetOf | `ismember` | `matlab.unittest.constraints`

Introduced in R2016a

matlab.unittest.constraints.IsTrue class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying true value

Construction

`IsTrue` provides a constraint specifying a true value. This constraint is satisfied only by a scalar logical with a value of `true`.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test Actual Value Is True

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsTrue

testCase = TestCase.forInteractiveUse;
```

Test that `true` satisfies the `IsTrue` constraint.

```
testCase.verifyThat(true, IsTrue)
```

```
Interactive verification passed.
```

Test that the `IsTrue` constraint is not satisfied by `false`.

```
testCase.verifyThat(false, IsTrue)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsTrue failed.
--> The value must evaluate to "true".

Actual Value:
         0
```

The test fails because `false` returns `logical(0)`.

Test that the `IsTrue` constraint is not satisfied by the double `1`.

```
testCase.verifyThat(1, IsTrue)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsTrue failed.
--> The value must be logical. It is of type "double".

Actual Value:
         1
```

The `IsTrue` constraint is satisfied only by `logical(1)`.

Test that the `IsTrue` constraint is not satisfied by a logical array of ones.

```
testCase.verifyThat([true true true], IsTrue)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsTrue failed.
--> The value must be scalar. It has a size of [1  3].

Actual Value:
         1     1     1
```

The `IsTrue` constraint is satisfied only if the value is scalar and `logical(1)`.

Tips

- For faster test execution, use `verifyTrue`, `assertTrue`, `assumeTrue`, or `fatalAssertTrue` instead of `IsTrue`.
- To display custom comparisons in the form of a function handle, use `ReturnsTrue` instead of `IsTrue`.

See Also

See Also

IsFalse | ReturnsTrue

matlab.unittest.constraints.LogicalComparator class

Package: matlab.unittest.constraints

Comparator for two logical values

Construction

`LogicalComparator` creates a comparator for two logical values. The comparator is satisfied if the actual and expected values have the same sparsity and the logical values are equivalent.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Compare Logical Values

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.LogicalComparator
import matlab.unittest.constraints.IsEqualTo

testCase = TestCase.forInteractiveUse;
```

Test the value of `true`.

```
testCase.assertThat(true, IsEqualTo(true, ...
    'Using', LogicalComparator))
```

```
Interactive assertion passed.
```

Test an array of `true` values.

```
testCase.assertThat([true true true], IsEqualTo(true, ...
    'Using', LogicalComparator))
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> LogicalComparator failed.
    --> The logical values are not equal

Actual Logical Value:
         1     1     1
Expected Logical Value:
         1
Assertion failed.
```

The actual value must be a scalar logical to satisfy the constraint.

Compare the value of `1` to `true`.

```
testCase.verifyThat(1, IsEqualTo(true, 'Using', LogicalComparator))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> LogicalComparator failed.
    --> Class check failed.
        --> Classes do not match.

            Actual Class:
                double
            Expected Class:
                logical

Actual double:
         1
Expected logical:
         1
```

Compare the value of `false` to `true`.

```
testCase.assertThat(false, IsEqualTo(true, 'Using', LogicalComparator))
```

```
Interactive assertion failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> LogicalComparator failed.
    --> The logical values are not equal

Actual Logical Value:
         0
Expected Logical Value:
         1
Assertion failed.
```

See Also

See Also

matlab.unittest.constraints.IsEqualTo

Introduced in R2013a

matlab.unittest.constraints.Matches class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying string matches regular expression

Construction

`Matches(expr)` creates a constraint that specifies that a string scalar or character vector matches a regular expression. The constraint is satisfied only if the actual value matches the given regular expression, `expr`.

`Matches(expr,'IgnoringCase',caseInsensitive)` creates a constraint indicating whether to ignore case difference.

Input Arguments

`expr`

Regular expression that the actual value must match to satisfy the constraint, specified as a string scalar or character vector. `expr` can include newline characters.

`caseInsensitive`

Indicator if the constraint is insensitive to case, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

Properties

`Expression`

Regular expression that the actual value must match, specified in the input argument, `expr`.

IgnoreCase

Indicator if the constraint is insensitive to case, specified in the input argument, `ignoreCase`. This property applies at all levels of recursion, such as nested structures.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Matches Regular Expression

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.Matches

testCase = TestCase.forInteractiveUse;
```

Test that the actual value string, `'Epsilon Eridani'`, matches `'eps'`.

```
testCase.verifyThat('Epsilon Eridani', Matches('^eps'))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
Matches failed.
--> The value does not match the regular expression.

Actual char:
    Epsilon Eridani
Regular Expression:
    ^eps
```

To satisfy the constraint, configure it to be case insensitive.

```
testCase.verifyThat('Epsilon Eridani', Matches('^eps', ...
    'IgnoringCase', true))
```

```
Interactive verification passed.
```

Define the regular expression that the actual value must match.

```
expr = 'Some[Tt]?ext';
```

The `[Tt]?` contained in the regular expression indicates that either `'T'` or `'t'` matches at that location 0 or 1 times.

Test that the actual values, `'SomeText'` and `'Sometext'`, satisfy the constraint.

```
testCase.verifyThat('SomeText', Matches(expr))
testCase.verifyThat('Sometext', Matches(expr))
```

```
Interactive verification passed.
Interactive verification passed.
```

Test that the actual value `'Someext'` satisfies the constraint.

```
testCase.verifyThat('Someext', Matches(expr))
```

```
Interactive verification passed.
```

Test that the actual value `'sometext'` does not satisfy the constraint.

```
testCase.verifyThat('sometext', Matches(expr))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
Matches failed.
--> The value does not match the regular expression.

Actual char:
    sometext
Regular Expression:
    Some[Tt]?ext
```

See Also

See Also

ContainsSubstring | EndsWithSubstring | IsSubstringOf | `regexp` | StartsWithSubstring

Topics

"Regular Expressions"

matlab.unittest.constraints.NumericComparator class

Package: matlab.unittest.constraints

Comparator for numeric data types

Construction

`NumericComparator` creates a comparator for numeric data types. The comparator is satisfied if inputs are of the same class with equivalent size, complexity, and sparsity, and the built-in `isequaln` function returns `true`.

`NumericComparator('Within',tolObj)` creates a comparator using a specified tolerance. In this case, `NumericComparator` first checks for equivalent class, size, and sparsity of the actual and expected values. If these checks fail, the comparator is not satisfied. If these checks pass and the `isequaln` or complexity check fails, `NumericComparator` delegates comparison to the supplied tolerance, `tolObj`.

Input Arguments

`tolObj`

`matlab.unittest.constraints.Tolerance` instance

Properties

`Tolerance`

Specific tolerance used in construction of the comparator, specified as a `Tolerance` object in the `tolObj` input argument

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Compare Numeric Values

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.NumericComparator
import matlab.unittest.constraints.IsEqualTo

testCase = TestCase.forInteractiveUse;
```

Use a numeric comparator to test that `1.618` is equal to `1.618`.

```
testCase.verifyThat(1.618, IsEqualTo(1.618,...
    'Using', NumericComparator))
```

```
Interactive verification passed.
```

Verify that `(1+sqrt(5))/2` is equal to `1.618`.

```
testCase.verifyThat((1+sqrt(5))/2, IsEqualTo(1.618, ...
    'Using', NumericComparator))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> NumericComparator failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                     Actual         Expected           Error                RelativeErro
                 _________________    ________    ____________________    ______________

                 1.61803398874989     1.618       3.39887498947977e-05    2.100664393992

Actual double:
       1.618033988749895
Expected double:
       1.618000000000000
```

Retest using a relative tolerance of `0.25%`.

```
import matlab.unittest.constraints.RelativeTolerance

testCase.verifyThat((1+sqrt(5))/2, IsEqualTo(1.618, ...
    'Using', NumericComparator('Within', RelativeTolerance(0.0025))))
```

```
Interactive verification passed.
```

See Also

See Also

matlab.unittest.constraints.IsEqualTo | matlab.unittest.constraints.Tolerance | `isequaln`

Introduced in R2013a

matlab.unittest.constraints.ObjectComparator class

Package: matlab.unittest.constraints

Comparator for MATLAB or Java objects

Construction

`ObjectComparator` creates a comparator for MATLAB or Java objects. The comparator is satisfied if the built-in `isequal` function returns `true`. However, if the class of the expected value defines an `isequaln` method, the `ObjectComparator` uses that method for comparison instead of `isequal`.

`ObjectComparator('Within',tolObj)` creates a comparator using a specified tolerance. `ObjectComparator` first checks that a call to `isequal` or `isequaln` returns `true`. If the check fails, the `ObjectComparator` checks for equivalent class, size, and sparsity of the actual and expected values. If these checks pass, `ObjectComparator` delegates comparison to the supplied tolerance, `tolObj`. The value of this tolerance must be of the same class as the actual and expected values.

Input Arguments

`tolObj`

`Tolerance` instance

Properties

`Tolerance`

Specific tolerance used in construction of the comparator, specified as a `matlab.unittest.constraints.Tolerance` object in the `tolObj` input argument

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Compare MATLAB Objects

In a file, `MyInt.m`, in your working folder, create a subclass of `int8`.

```
classdef MyInt < int8
    methods
        function i = MyInt(value)
            i@int8(value);
        end
    end
end
```

At the command prompt, create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.ObjectComparator
import matlab.unittest.constraints.IsEqualTo

testCase = TestCase.forInteractiveUse;
```

Use an `ObjectComparator` to test that two instances of `MyInt` are equal to each other.

```
testCase.verifyThat(MyInt(10), ...
    IsEqualTo(MyInt(10), 'Using', ObjectComparator))
```

```
Interactive verification passed.
```

Test the equality of two instances of `MyInt` that are constructed with different input values.

```
testCase.verifyThat(MyInt(11), ...
    IsEqualTo(MyInt(10), 'Using', ObjectComparator))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> ObjectComparator failed.
    --> The objects are not equal using "isequal".

Actual Object:
```

```
      MyInt:

      int8 data:
       11
Expected Object:
      MyInt:

      int8 data:
       10
```

One instance of `MyInt` has a value of `11`, and the other has a value of `10`.

Repeat the test and specify that values must be equal within an absolute tolerance of `1`.

```
import matlab.unittest.constraints.AbsoluteTolerance

testCase.verifyThat(MyInt(11), IsEqualTo(MyInt(10), ...
    'Using', ObjectComparator('Within', AbsoluteTolerance(MyInt(1)))))
```

```
Interactive verification passed.
```

See Also

See Also

matlab.unittest.constraints.IsEqualTo | matlab.unittest.constraints.Tolerance | `isequal`

Introduced in R2013a

matlab.unittest.constraints.PublicPropertyComparator class

Package: matlab.unittest.constraints

Comparator for public properties of MATLAB objects

Description

The `PublicPropertyComparator` compares public properties of MATLAB objects.

The `PublicPropertyComparator` supports MATLAB objects or arrays of objects and recursively compares data structures contained in the public properties. The `PublicPropertyComparator` is different from the `isequal` function because it examines only the public properties of the objects.

Typically you construct a `PublicPropertyComparator` using the supportingAllValues static method.

Construction

`PublicPropertyComparator` creates a comparator for public properties of MATLAB objects. This comparator supports only objects with no public properties.

`PublicPropertyComparator(compObj)` indicates a comparator, `compObj`, that defines the comparator used to compare public properties. This comparator supports recursion only in the data types supported by `compObj`.

`PublicPropertyComparator(compObj,Name,Value)` provides a comparator with additional options specified by one or more `Name,Value` pair arguments.

Methods

supportingAllValues	Comparator for public properties that supports any value in recursion

Input Arguments

`compObj`

Comparator object

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'IgnoringProperties'` — Properties to ignore during object comparison
cell array of character vectors

Properties to ignore during object comparison, specified as a cell array of character vectors.

Example: `PublicPropertyComparator('IgnoringProperties',{'Stack'})`

`'Recursively'` — Setting for whether comparator operates recursively
`false` (default) | `true`

Setting for whether comparator operates recursively, specified as `false` or `true` (`logical` `0` or `1`). When this value is `false`, the comparator does not operate recursively on its data.

When the value is `true`, the data types that the public property comparator supports are fully supported in recursion.

Properties

`IgnoredProperties`

Properties to ignore during object comparison, specified in the name-value pair argument, `'IgnoringProperties'`.

`Recursive`

Indicator of whether comparator operates recursively, specified in the name-value pair argument, `'Recursively'`.

Limitations

- The `PublicPropertyComparator` does not compare public properties of objects that overload the `subsref`, `numel`, or `properties` functions.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Instantiate `PublicPropertyComparator` Object

In a file in your working folder, construct this `Employee` class.

```
classdef Employee
    properties (SetAccess=immutable)
        Name
    end
    properties (Access=private)
        Location
    end
    methods
        function obj = Employee(name,location)
            obj.Name = name;
            obj.Location = location;
        end
    end
end
```

At the command prompt, create two instances of the `Employee` class.

```
e1 = Employee('sam','Building A');
e2 = Employee('Sam','Building B');
```

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
```

```
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.PublicPropertyComparator
import matlab.unittest.constraints.StringComparator

testCase = TestCase.forInteractiveUse;
```

Construct a comparator and verify that `e1` and `e2` are equal.

```
compObj = PublicPropertyComparator;
testCase.verifyThat(e1, IsEqualTo(e2,'Using',compObj))
```

```
Error using matlab.unittest.internal.constraints.ContainerComparator/throwUnsupportedEl
The matlab.unittest.constraints.PublicPropertyComparator found no comparator which supp

Element (char):
    Sam

Error in matlab.unittest.internal.constraints.ContainerComparator/getComparatorFor (lin
            comparator.throwUnsupportedElement(expElement);

Error in matlab.unittest.internal.constraints.ContainerComparator/haveEqualValues (line
                comp = comparator.getComparatorFor(expElement);

Error in matlab.unittest.internal.constraints.ContainerComparator/satisfiedBy (line 94)
                   comparator.haveEqualValues(actContainer,expContainer);

Error in matlab.unittest.constraints.IsEqualTo/satisfiedBy (line 176)
            bool = constraint.Comparator.satisfiedBy(actual, constraint.Expected);

Error in matlab.unittest.internal.qualifications.QualificationDelegate/qualifyThat (lin
                result = constraint.satisfiedBy(actual);

Error in matlab.unittest.qualifications.Verifiable/verifyThat (line 227)
            qualifyThat(verifiable.VerificationDelegate, ...
```

The test fails because, by default, the `PublicPropertyComparator` does not support character vectors.

Construct a comparator that supports character vectors. Specify that the comparison is not case-sensitive.

```
compObj = PublicPropertyComparator(StringComparator);
testCase.verifyThat(e1, IsEqualTo(e2,'Using',compObj, 'IgnoringCase',true))
```

```
Interactive verification passed.
```

The test passes even though `e1.Location` and `e2.Location` are not the same. Since `Location` is a private property, the comparator does not compare its contents.

See Also

See Also

matlab.unittest.constraints.IsEqualTo | matlab.unittest.constraints.ObjectComparator

Introduced in R2014a

matlab.unittest.constraints.PublicPropertyComparator.suppor

Class: matlab.unittest.constraints.PublicPropertyComparator
Package: matlab.unittest.constraints

Comparator for public properties that supports any value in recursion

Syntax

```
PublicPropertyComparator.supportingAllValues
PublicPropertyComparator.supportingAllValues(Name,Value)
```

Description

`PublicPropertyComparator.supportingAllValues` creates a comparator for public properties of MATLAB objects. This comparator supports any value in recursion. `supportingAllValues` is a `Static` method of the `PublicPropertyComparator` class.

`PublicPropertyComparator.supportingAllValues(Name,Value)` provides a comparator for MATLAB objects with no public properties with additional options specified by one or more `Name,Value` pair arguments.

You typically pass this comparator to another constraint, such as `IsEqualTo`. You can use the `Name,Value` pairs of the `IsEqualTo` constraint with a comparator constructed with the `PublicPropertyComparator.supportingAllValues` syntax.

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'IgnoringCase'` — Setting for comparator insensitivity to case
`false` (default) | `true`

Setting for whether the comparator is insensitive to case, specified as `false` or `true` (`logical` `0` or `1`). When it is `false`, the comparator is sensitive to case. The comparator uses this name-value pair only if the contents being compared consist of character vectors.

`'IgnoringFields'` — Fields to ignore during struct comparison
cell array of character vectors

Fields to ignore during `struct` comparison, specified as a cell array of character vectors.

Example:
```
PublicPropertyComparator.supportingAllValues('IgnoringFields',
{'timestamp'})
```

`'IgnoringProperties'` — Properties to ignore during object comparison
cell array of character vectors

Properties to ignore during object comparison, specified as a cell array of character vectors.

Example:
```
PublicPropertyComparator.supportingAllValues('IgnoringProperties',
{'Stack'})
```

`'IgnoringWhitespace'` — Setting for comparator insensitivity to whitespace characters
`false` (default) | `true`

Setting for whether the comparator is insensitive to whitespace characters, specified as `false` or `true` (`logical` `0` or `1`). When it is `false`, the comparator is sensitive to whitespace characters. Whitespace characters consist of space, form feed, new line, carriage return, horizontal tab, and vertical tab. The comparator uses this name-value pair only if the contents being compared consist of character vectors.

`'Within'` — Tolerance to use for numerical comparison
instance of `matlab.unittest.constraints.Tolerance`

Tolerance to use for numerical comparison, specified as a `matlab.unittest.constraints.Tolerance` object. The comparator uses this name-value pair only if the contents being compared consist of numeric types.

Limitations

- The `PublicPropertyComparator` does not compare public properties of objects that overload the `subsref`, `numel`, or `properties` functions.

Examples

Instantiate `PublicPropertyComparator` Object to Support All Values

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.PublicPropertyComparator

testCase = TestCase.forInteractiveUse;
```

Test a passing case.

```
m1 = MException('Msg:ID','MsgText');
m2 = MException('Msg:ID','MsgText');
testCase.verifyThat(m1, IsEqualTo(m2, 'Using', ...
    PublicPropertyComparator.supportingAllValues))
```

```
Interactive verification passed.
```

Test a failing case.

```
m1 = MException('Msg:ID','MsgText');
m2 = MException('Msg:ID','msgtext');
testCase.verifyThat(m1, IsEqualTo(m2, 'Using', ...
    PublicPropertyComparator.supportingAllValues))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> Path to failure: <Value>.message
    --> StringComparator failed.
        --> The character arrays are not equal.
```

```
        Actual char:
            MsgText
        Expected char:
            msgtext

Actual MException:
      MException with properties:

        identifier: 'Msg:ID'
           message: 'MsgText'
             cause: {}
             stack: [0×1 struct]
Expected MException:
      MException with properties:

        identifier: 'Msg:ID'
           message: 'msgtext'
             cause: {}
             stack: [0×1 struct]
```

Test a case that passes when the comparator ignores differences in case.

```
m1 = MException('Msg:ID','MsgText');
m2 = MException('Msg:ID','msgtext');
testCase.verifyThat(m1, IsEqualTo(m2,'Using', ...
    PublicPropertyComparator.supportingAllValues('IgnoringCase',true)))
```

```
Interactive verification passed.
```

Test a case that passes when the comparator ignores the `message` property of the `MException` object.

```
testCase.verifyThat(m1, IsEqualTo(m2,'Using', ...
    PublicPropertyComparator.supportingAllValues('IgnoringProperties',{'message'})))
```

```
Interactive verification passed.
```

Instantiate `PublicPropertyComparator` Object with Tolerance

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.RelativeTolerance
import matlab.unittest.constraints.PublicPropertyComparator
```

```
testCase = TestCase.forInteractiveUse;
```

Define actual and expected `timeseries` objects. Perturb one of the actual data points by 1%.

```
expected = timeseries(1:10);
actual = expected;
actual.Data(7) = 1.01*actual.Data(7);
```

Test that the actual and expected values are equal within a relative tolerance of 2%.

```
testCase.verifyThat(actual, IsEqualTo(expected,...
    'Within', RelativeTolerance(.02)))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> ObjectComparator failed.
    --> The objects are not equal using "isequal".
    --> The tolerance was ignored. The tolerance as specified does not support compari

    Actual timeseries:
          timeseries

          Common Properties:
                    Name: 'unnamed'
                    Time: [10x1 double]
                TimeInfo: [1x1 tsdata.timemetadata]
                    Data: [1x1x10 double]
                DataInfo: [1x1 tsdata.datametadata]

          More properties, Methods
    Expected timeseries:
          timeseries

          Common Properties:
                    Name: 'unnamed'
                    Time: [10x1 double]
                TimeInfo: [1x1 tsdata.timemetadata]
                    Data: [1x1x10 double]
                DataInfo: [1x1 tsdata.datametadata]
```

```
          More properties, Methods
```

Use the `PublicPropertyComparator` in the construction of the constraint.

```
testCase.verifyThat(actual, IsEqualTo(expected,...
    'Within', RelativeTolerance(.02),...
    'Using', PublicPropertyComparator.supportingAllValues))
```

```
Interactive verification passed.
```

The test passes because the `PublicPropertyComparator` compares each public property individually instead of comparing the object all at once. In the former test, the `ObjectComparator` compares `timeseries` objects, and therefore relies on the `isequal` method of the `timeseries` class. Due to the perturbation in the actual `timeseries`, `isequal` returns `false`. The comparator does not apply the tolerance because the double-valued tolerance cannot apply directly to the `timeseries` object. In the latter test, the comparator applies the tolerance to each public property that contains double-valued data.

See Also

See Also

matlab.unittest.constraints.IsEqualTo | matlab.unittest.constraints.ObjectComparator

Introduced in R2014a

matlab.unittest.constraints.RelativeTolerance class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Tolerance

Relative numeric tolerance

Description

This numeric `Tolerance` assesses the magnitude of the difference between actual and expected values, relative to the expected value. For the tolerance to be satisfied, `abs(expVal - actVal) <= relTol.*abs(expVal)` must be true.

Construction

`RelativeTolerance(tolVals)` creates a relative tolerance object that assesses the magnitude of the difference between actual and expected values, relative to the expected value.

The data types of the inputs to the `RelativeTolerance` constructor determine which data types the tolerance supports. For example, `RelativeTolerance(10*eps)` constructs a `RelativeTolerance` for comparing double-precision numeric arrays while `RelativeTolerance(int8(2))` constructs a `RelativeTolerance` for comparing numeric arrays of type `int8`. If the actual and expected values being compared contain more than one numeric data type, the tolerance only applies to the data types specified by the values passed into the constructor.

To specify different tolerance values for different data types, you can pass multiple tolerance values to the constructor. For example, `RelativeTolerance(10*eps, 10*eps('single'), int8(1))` constructs an `RelativeTolerance` that applies the following absolute tolerances:

- `10*eps` applies a relative tolerance of `10*eps` for double-precision numeric arrays.
- `10*eps('single')` applies a relative tolerance of `10*eps` for single-precision numeric arrays.
- `int8(1)` applies a relative tolerance of `1` for numeric arrays of type `int8`.

You can specify more than one tolerance for a particular data type by combining tolerances with the & and | operators. To combine two tolerances, the sizes of the tolerance values for each data type must be compatible.

Input Arguments

`tolVals`

Numeric tolerances, specified as a comma-separated list of numeric arrays. Each input argument contains the tolerance specification for a particular data type. Each numeric array can be a scalar or array the same size as the actual and expected values.

Default:

Properties

`Values`

Numeric tolerances, specified by the `tolVals` input argument

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test with Relative Tolerance

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.RelativeTolerance

testCase = TestCase.forInteractiveUse;
```

Assert that the difference between an actual value, `4.1`, and an expected value, `4.5`, is less than `10%`.

```
testCase.assertThat(4.1, IsEqualTo(4.5, ...
    'Within', RelativeTolerance(0.1)))
```

```
Interactive assertion passed.
```

Specify Relative Tolerance for Different Data Types

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.RelativeTolerance

testCase = TestCase.forInteractiveUse;
```

Create the following actual and expected cell arrays.

```
act = {'abc', 123, single(106)};
exp = {'abc', 122, single(105)};
```

Test that the arrays satisfy the `RelativeTolerance` constraint within `2%`.

```
testCase.verifyThat(act, IsEqualTo(exp, ...
    'Within', RelativeTolerance(0.02)))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> Path to failure: <Value>{3}
    --> NumericComparator failed.
        --> The values are not equal using "isequaln".
        --> The tolerance was ignored. The tolerance as specified does not support comp
        --> Failure table:
                    Actual    Expected    Error    RelativeError
                    ______    ________    _____    _____________

                    106       105         1        0.00952381

        Actual single:
```

```
                106
        Expected single:
                105

Actual cell:
        'abc'    [123]    [106]
Expected cell:
        'abc'    [122]    [105]
```

The test fails because the tolerance is only applied to the `double` data type.

Create a tolerance object that specifies different tolerances for different data types.

```
tolObj = RelativeTolerance(0.02, single(0.02));
```

A tolerance of `2%` is a applied to `double` and `single` valued data.

Verify that the expected and actual values satisfy the `RelativeTolerance` constraint.

```
testCase.verifyThat(act, IsEqualTo(exp, 'Within', tolObj))
```

```
Interactive verification passed.
```

Combine Relative and Absolute Tolerances

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.AbsoluteTolerance
import matlab.unittest.constraints.RelativeTolerance

testCase = TestCase.forInteractiveUse;
```

Define an actual value approximation for `pi`.

```
act = 3.14;
```

Construct a tolerance object to test that the difference between the actual and expected values is within `0.001` and within `0.25%`.

```
tolObj = AbsoluteTolerance(0.001) & RelativeTolerance(0.0025);
```

Verify that the actual value is within the tolerance of the expected value of `pi`.

```
testCase.verifyThat(act, IsEqualTo(pi, 'Within', tolObj))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> NumericComparator failed.
    --> The values are not equal using "isequaln".
    --> AndTolerance failed.
        --> AbsoluteTolerance failed.
            --> The error was not within absolute tolerance.
        --> RelativeTolerance passed.
            --> The error was within relative tolerance.
        --> Failure table:
                    Actual        Expected                Error                 RelativeE
                    ______    _________________    ____________________    _____________

                    3.14      3.14159265358979    -0.00159265358979299    -0.000506957

    Actual double:
           3.140000000000000
    Expected double:
           3.141592653589793
```

The actual value does not satisfy the `AbsoluteTolerance` constraint.

Construct a constraint that is satisfied if the values are within `0.001` or `0.25%`, and then retest the actual value.

```
tolObj = AbsoluteTolerance(0.001) | RelativeTolerance(0.0025);
testCase.verifyThat(act, IsEqualTo(pi, 'Within', tolObj))
```

```
Interactive verification passed.
```

Combine Absolute and Relative Tolerances to Test Small and Large Values

Combine tolerances so when you test the equality of values, an absolute (floor) tolerance dominates when the values are near zero, and a relative tolerance dominates for larger values.

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.AbsoluteTolerance
```

```
import matlab.unittest.constraints.RelativeTolerance

testCase = TestCase.forInteractiveUse;
```

Define two structures containing electromagnetic properties of a vacuum. One structure, `approxVacuumProps`, contains approximate values for the permeability and speed of light in a vacuum.

```
approxVacuumProps.Permeability = 1.2566e-06; % Approximate
approxVacuumProps.Permitivity = 8.854187817*10^-12;
approxVacuumProps.LightSpeed = 2.9979e+08; % Approximate

baselineVacuumProps.Permeability = 4*pi*10^-7;
baselineVacuumProps.Permitivity = 8.854187817*10^-12;
baselineVacuumProps.LightSpeed = 1/sqrt(...
    baselineVacuumProps.Permeability*baselineVacuumProps.Permitivity);
```

Test that the relative difference between the approximate and baseline values is within `eps*1e11`.

```
testCase.verifyThat(approxVacuumProps, IsEqualTo(baselineVacuumProps, ...
    'Within', RelativeTolerance(eps*1e11)))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> Path to failure: <Value>.Permeability
    --> NumericComparator failed.
        --> The values are not equal using "isequaln".
        --> RelativeTolerance failed.
            --> The error was not within relative tolerance.
            --> Failure table:
                          Actual            Expected                  Error
                        __________    ___________________    ______________________

                        1.2566e-06    1.25663706143592e-06    -3.70614359173257e-11

        Actual double:
                 1.256600000000000e-06
        Expected double:
                 1.256637061435917e-06
```

```
Actual struct:
        Permeability: 1.256600000000000e-06
         Permitivity: 8.854187816999999e-12
          LightSpeed: 299790000
Expected struct:
        Permeability: 1.256637061435917e-06
         Permitivity: 8.854187816999999e-12
          LightSpeed: 2.997924580105029e+08
```

The test fails because the relative difference in the permeabilities is not within the tolerance. The difference between the two values is small, but the numbers are close to zero, so the difference relative to their size is not small enough to satisfy the tolerance.

Construct a tolerance object to test that the absolute difference between the approximate and baseline values is within `1e-4`.

```
testCase.verifyThat(approxVacuumProps, IsEqualTo(baselineVacuumProps, ...
    'Within', AbsoluteTolerance(1e-4)))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> Path to failure: <Value>.LightSpeed
    --> NumericComparator failed.
        --> The values are not equal using "isequaln".
        --> AbsoluteTolerance failed.
            --> The error was not within absolute tolerance.
            --> Failure table:
                         Actual          Expected              Error             Relat
                        _________    _________________    __________________    _________

                        299790000    299792458.010503    -2458.01050287485    -8.19904

        Actual double:
               299790000
        Expected double:
                 2.997924580105029e+08

Actual struct:
        Permeability: 1.256600000000000e-06
         Permitivity: 8.854187816999999e-12
          LightSpeed: 299790000
```

```
Expected struct:
        Permeability: 1.256637061435917e-06
         Permitivity: 8.854187816999999e-12
          LightSpeed: 2.997924580105029e+08
```

The test fails because the absolute difference in the speed of light is not within the tolerance. The difference between the two values is small relative to their size, but too large to satisfy the tolerance.

Construct a logical disjunction of tolerance objects to test that the absolute difference between the approximate and baseline values is within `1e-4` or the relative difference is within `eps*1e11`. The test uses this tolerance so permeability values that are close to zero satisfy the absolute (floor) tolerance, and speed of light values that are large, satisfy the relative tolerance.

```
testCase.verifyThat(approxVacuumProps, IsEqualTo(baselineVacuumProps, ...
    'Within', RelativeTolerance(eps*1e11)| AbsoluteTolerance(1e-4)))
```

```
Interactive verification passed.
```

See Also

See Also

matlab.unittest.constraints.AbsoluteTolerance | matlab.unittest.constraints.IsEqualTo

Introduced in R2013a

matlab.unittest.constraints.ReturnsTrue class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying function handle that returns true

Construction

`ReturnsTrue` provides a constraint specifying that a function handle that returns true. The constraint is satisfied only by a function handle that returns a scalar logical with a value of `true`.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test Actual Value Specified by Function Handle Returns True

These comparisons are shown for example only. There are other constraints that might better handle the particular comparisons.

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.ReturnsTrue

testCase = TestCase.forInteractiveUse;
```

Verify that the `ReturnsTrue` constraint is satisfied by the value returned by a handle to `true`.

```
testCase.verifyThat(@true, ReturnsTrue)
```

```
Interactive verification passed.
```

Verify that the `ReturnsTrue` constraint is not satisfied by a handle to `false`.

```
testCase.verifyThat(@false, ReturnsTrue)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
ReturnsTrue failed.
--> The function handle should have evaluated to "true".
--> Returned value:
             0

Actual Function Handle:
        @false
```

Verify that a call to `isequal` returns true.

```
testCase.verifyThat(@() isequal(1,1), ReturnsTrue)
```

```
Interactive verification passed.
```

Verify that a function that returns a double-valued 1 does not satisfy the `ReturnsTrue` constraint.

```
testCase.verifyThat(@() double(true), ReturnsTrue)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
ReturnsTrue failed.
--> The function handle should have returned a logical value. It was of type "double".
--> Returned value:
             1

Actual Function Handle:
        @()double(true)
```

Verify that the negation of a text comparison of `'a'` and `'b'` returns true.

```
testCase.verifyThat(@() ~strcmp('a','b'), ReturnsTrue)
```

```
Interactive verification passed.
```

Test if a comparison of `'a'` to the cell array `{'a','a'}` returns true.

```
testCase.verifyThat(@() strcmp('a',{'a','a'}), ReturnsTrue)
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
ReturnsTrue failed.
--> The function handle should have returned a scalar. The return value had a size of [
--> Returned value:
             1     1

Actual Function Handle:
        @()strcmp('a',{'a','a'})
```

The constraint is not satisfied because the call to `strcmp` results a logical array, not a logical scalar.

Tips

- To display custom comparisons in the form of a function handle, use `ReturnsTrue` instead of `IsTrue`.

See Also

See Also

Constraint | IsTrue

matlab.unittest.constraints.StartsWithSubstring class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.BooleanConstraint

Constraint specifying string starting with substring

Construction

`StartsWithSubstring(prefix)` creates a constraint specifying a string scalar or character vector starting with a substring. The constraint is satisfied only if the actual value starts with an expected prefix, `prefix`.

`StartsWithSubstring(prefix,Name,Value)` provides a constraint with additional options specified by one or more `Name,Value` pair arguments. `Name` must appear inside single quotes (`' '`). You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Input Arguments

`prefix`

Text at the start of the actual value, specified as a string scalar or character vector. `prefix` can include newline characters.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'IgnoringCase'`

Indicator if the constraint is insensitive to case, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

`'IgnoringWhitespace'`

Indicator if the constraint is insensitive to whitespace, specified as `false` or `true` (`logical` `0` or `1`)

Default: `false`

Properties

`IgnoreCase`

Indicator if the constraint is insensitive to case, specified in the name-value pair argument, `'IgnoringCase'`. This property applies at all levels of recursion, such as nested structures.

`IgnoreWhitespace`

Indicator if the constraint is insensitive to whitespace, specified in the name-value pair argument, `'IgnoringWhitespace'`. This property applies at all levels of recursion, such as nested structures.

`Prefix`

Text at the start of the actual value, specified in the input argument, `prefix`.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test That Actual Value Starts with Specified Substring

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.StartsWithSubstring
```

```
testCase = TestCase.forInteractiveUse;
```

Define the actual value.

```
actVal = 'This Is One Long Message';
```

Test that `actVal` starts with `'This'`.

```
testCase.verifyThat(actVal, StartsWithSubstring('This'))
```

```
Interactive verification passed.
```

Test that `actVal` starts with `'this is'`.

```
testCase.verifyThat(actVal, StartsWithSubstring('this is'))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
StartsWithSubstring failed.
--> The value does not start with the supplied prefix.

Actual char:
    This Is One Long Message
Expected Prefix:
    this is
```

By default, the `StartsWithSubstring` constraint is case sensitive.

Repeat the test, this time ignoring case.

```
testCase.verifyThat(actVal, StartsWithSubstring('this is',...
    'IgnoringCase', true))
```

```
Interactive verification passed.
```

Test that `actVal` starts with `'thisisone'`. For the test to pass, configure the constraint to ignore whitespace and case.

```
testCase.verifyThat(actVal, StartsWithSubstring('thisisone', ...
    'IgnoringCase', true, 'IgnoringWhitespace', true))
```

```
Interactive verification passed.
```

Assert that `actVal` does not start with `'long'`.

```
testCase.assertThat(actVal, ~StartsWithSubstring('Long'))
```

```
Interactive assertion passed.
```

See Also

See Also

ContainsSubstring | EndsWithSubstring | IsSubstringOf | Matches

matlab.unittest.constraints.StringComparator class

Package: matlab.unittest.constraints

Comparator for two strings or character arrays

Construction

`StringComparator` creates a comparator for two strings or character arrays. The comparator is satisfied if the two values are equal.

`StringComparator(Name,Value)` creates a comparator with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'IgnoringCase'`

Indicator if the comparator is insensitive to case, specified as `false` or `true` (`logical` `0` or `1`). When it is `false`, the comparator is sensitive to case.

Default: `false`

`'IgnoringWhitespace'`

Indicator if the comparator is insensitive to whitespace characters, specified as `false` or `true` (`logical` `0` or `1`). When it is `false`, the comparator is sensitive to whitespace characters. Whitespace characters consist of space, form feed, new line, carriage return, horizontal tab, and vertical tab.

Default: `false`

Properties

IgnoreCase

Indicator if the comparator is insensitive to case, specified in the name-value pair argument, `'IgnoringCase'`

IgnoreWhitespace

Indicator if the comparator is insensitive to whitespace characters, specified in the name-value pair argument, `'IgnoringWhitespace'`

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Compare Character Vectors

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.StringComparator
import matlab.unittest.constraints.IsEqualTo

testCase = TestCase.forInteractiveUse;
```

Verify that the actual and expected character vectors are equal using a string comparator.

```
expected = 'coffee';
actual = 'coffee';
testCase.verifyThat(actual,IsEqualTo(expected, ...
    'Using', StringComparator))
```

```
Interactive verification passed.
```

Change the actual character vector and repeat the comparison.

```
expected = 'coF Fee';
testCase.verifyThat(actual,IsEqualTo(expected, ...
    'Using', StringComparator))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> StringComparator failed.
    --> The character arrays are not equal.

    Actual char:
        coffee
    Expected char:
        coF Fee
```

For the test to pass, construct a comparator that ignores case and whitespace characters.

```
testCase.verifyThat(actual,IsEqualTo(expected, ...
    'Using', StringComparator('IgnoringCase', true, ...
    'IgnoringWhitespace', true)))
```

```
Interactive verification passed.
```

See Also

See Also

matlab.unittest.constraints.IsEqualTo | `strcmp`

Introduced in R2013a

matlab.unittest.constraints.StructComparator class

Package: matlab.unittest.constraints

Comparator for MATLAB structure arrays

Construction

`StructComparator` creates a comparator for MATLAB structure arrays.

`StructComparator(compObj)` indicates a comparator, `compObj`, that defines the comparator used to compare values contained in the structure. By default, a `StructComparator` supports only empty structure arrays.

`StructComparator(compObj,Name,Value)` provides a comparator with additional options specified by one or more `Name,Value` pair arguments.

`StructComparator(Name,Value)` provides a comparator for empty structure arrays with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`compObj`

Comparator object

A comparator is passed into the `StructComparator` to support data types during recursion. By default, the `StructComparator` supports only empty structure arrays.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'IgnoringFields'` — Fields to ignore during struct comparison
cell array of character vectors

Fields to ignore during struct comparison, specified as a cell array of character vectors.

`'Recursively'` — Setting for whether comparator operates recursively
`false` (default) | `true`

Setting for whether the comparator operates recursively, specified as `false` or `true` (`logical` `0` or `1`). When this value is `false`, the comparator does not operate recursively on its data.

When the value is `true`, the data types the `StructComparator` supports are fully supported in recursion. For example:

```
comp1 = StructComparator(NumericComparator);
comp2 = StructComparator(NumericComparator, 'Recursively', true);
```

Both `comp1` and `comp2` support structures that contain numeric values as their fields. However, only `comp2` supports structures that recursively contain either structures or numeric values as their fields.

Properties

`IgnoredFields`

Fields to ignore during struct comparison, specified in the name-value pair argument, `'IgnoringFields'`.

`Recursive`

Indicator of whether comparator operates recursively, specified in the name-value pair argument, `'Recursively'`.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Compare Numeric Structures

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.AbsoluteTolerance
import matlab.unittest.constraints.StructComparator
import matlab.unittest.constraints.NumericComparator

testCase = TestCase.forInteractiveUse;
```

Create two equal structures.

```
s1 = struct('id',7,'score',7.3);
s2 = s1;
```

Test that the structures are equal. By default, the `StructComparator` supports only empty structures, so you need to configure the comparator with a `NumericComparator`.

```
testCase.verifyThat(s1, IsEqualTo(s2, 'Using', ...
    StructComparator(NumericComparator)))
```

```
Interactive verification passed.
```

Change the score of `s2` and compare the structures again.

```
s2.score = 7.6;
testCase.verifyThat(s1, IsEqualTo(s2, 'Using', ...
    StructComparator(NumericComparator)))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
IsEqualTo failed.
--> NumericComparator failed.
    Path to failure: <Value>.score
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error       RelativeError
                ______    ________    _____    ___________________

                7.3       7.6         -0.3     -0.0394736842105263

    Actual double:
           7.300000000000000
    Expected double:
```

```
           7.600000000000000

Actual struct:
           id: 7
        score: 7.300000000000000
Expected struct:
           id: 7
        score: 7.600000000000000
```

Specify an absolute tolerance for the comparison.

```
testCase.verifyThat(s1, IsEqualTo(s2, 'Using', ...
    StructComparator(NumericComparator), 'Within', ...
    AbsoluteTolerance(0.5)))
```

```
Interactive verification passed.
```

Compare Character Structures

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.constraints.StructComparator
import matlab.unittest.constraints.StringComparator

testCase = TestCase.forInteractiveUse;
```

Create two structures. Make one of the fields a nested structure.

```
e1 = struct('name', struct('first','sam','last','smith'), ...
    'location','Building A');
e2 = e1;
```

Verify that the two structures are equal. Since the struct contains a nested structure, configure the constraint to operate recursively.

```
testCase.verifyThat(e1, IsEqualTo(e2, 'Using', ...
    StructComparator(StringComparator, 'Recursively', true)))
```

```
Interactive verification passed.
```

Change the first name field of the `e2` structure and repeat the comparison.

```
e2.name.first = ' SAM';
```

```
testCase.verifyThat(e1, IsEqualTo(e2, 'Using', ...
    StructComparator(StringComparator, 'Recursively', true)))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> Path to failure: <Value>.name.first
    --> StringComparator failed.
        --> The character arrays are not equal.

        Actual char:
            sam
        Expected char:
             SAM

Actual struct:
            name: [1×1 struct]
        location: 'Building A'
Expected struct:
            name: [1×1 struct]
        location: 'Building A'
```

Configure the comparator to ignore case and whitespace characters.

```
testCase.verifyThat(e1, IsEqualTo(e2, 'Using', ...
    StructComparator(StringComparator, 'Recursively', true), ...
    'IgnoringCase', true, 'IgnoringWhitespace', true))
```

```
Interactive verification passed.
```

See Also

See Also

matlab.unittest.constraints.IsEqualTo | matlab.unittest.constraints.Tolerance

Introduced in R2013a

matlab.unittest.constraints.TableComparator class

Package: matlab.unittest.constraints

Comparator for MATLAB tables

Construction

`TableComparator` creates a comparator for MATLAB tables that iterates over each column of the table. By default, a `TableComparator` supports only empty tables.

`TableComparator(compObj)` indicates a comparator, `compObj`, that defines the comparator used to compare values contained in the table columns.

`TableComparator( ___ ,Name,Value)` provides a comparator with additional options specified by one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`compObj` — Comparator object
instance of `matlab.unittest.constraints`

Comparator object, specified as an instance of `matlab.unittest.constraints` that is classified as a comparator.

Example: `CellComparator`

Example: `NumericComparator`

Example: `StringComparator`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'Recursively'` — Setting for whether comparator operates recursively
`false` (default) | `true`

Setting for whether the comparator operates recursively, specified as `false` or `true` (`logical` `0` or `1`). When this value is `false`, the comparator does not operate recursively on its data.

When the value is `true`, the data types that the table comparator supports are fully supported in recursion.

Data Types: `logical`

Properties

`Recursive` — Indicator of whether comparator operates recursively

`false` (default) | `true`

Indicator of whether the comparator operates recursively, returned as `false` or `true` (`logical` `0` or `1`).

Data Types: `logical`

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test Table Equality with `TableComparator`

Create a test case for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Create two equal tables.

```
LastName = {'Williams';'Jones';'Brown'};
Age = [38;40;49];
Height = [64;67;64];
Weight = [131;133;119];
BloodPressure = [125 83; 117 75; 122 80];
```

```
T1 = table(Age,Height,Weight,BloodPressure, ...
    'RowNames',LastName);
T2 = T1;
```

Test that the tables are equal. Check the columns of the tables with a numeric comparator.

```
import matlab.unittest.constraints.TableComparator
import matlab.unittest.constraints.NumericComparator
import matlab.unittest.constraints.IsEqualTo
testCase.verifyThat(T1,IsEqualTo(T2, ...
    'Using',TableComparator(NumericComparator)))
```

```
Interactive verification passed.
```

Change the age of the last person to 50 and compare the tables again.

```
T2.Age(end) = 50;
testCase.verifyThat(T1,IsEqualTo(T2, ...
    'Using',TableComparator(NumericComparator)))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> Path to failure: <Value>.Age
    --> NumericComparator failed.
        --> The values are not equal using "isequaln".
        --> Failure table:
            value =

              1×5 table array

                Index    Actual    Expected    Error    RelativeError
                _____    ______    ________    _____    _____________

                3        49        50          -1       -0.02

        Actual double:
                38
                40
                49
```

```
        Expected double:
                38
                40
                50

Actual table:
    value =

      3×4 table array

                    Age    Height    Weight    BloodPressure
                    ___    ______    ______    _____________

        Williams    38     64        131       125     83
        Jones       40     67        133       117     75
        Brown       49     64        119       122     80
Expected table:
    value =

      3×4 table array

                    Age    Height    Weight    BloodPressure
                    ___    ______    ______    _____________

        Williams    38     64        131       125     83
        Jones       40     67        133       117     75
        Brown       50     64        119       122     80
```

See Also

See Also

matlab.unittest.constraints.IsEqualTo

Introduced in R2017a

matlab.unittest.constraints.Throws class

Package: matlab.unittest.constraints
Superclasses: matlab.unittest.constraints.Constraint

Constraint specifying function handle that throws MException

Description

The `Throws` class creates a constraint that is satisfied only if the actual value is a function handle that throws a specific exception.

If the function throws an `MException` and the `ExpectedException` property of the constraint is an error identifier, a qualification failure occurs if the actual `MException` thrown has a different identifier. Alternately, if the `ExpectedException` property is a `meta.class`, the constraint is not satisfied if the actual `MException` thrown does not derive from the `ExpectedException`.

Construction

`outConstObj = Throws(excep)` provides a constraint, `outConstObj`, specifying a function handle that throws a particular `MException`, `excep`.

`outConstObj = Throws(excep,Name,Value)` provides a constraint with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`excep`

Error identifier or `meta.class` representing the specific type of expected exception. If `excep` is a `meta.class` but does not derive from `MException`, the `Throws` constructor throws an `MException`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'CausedBy'`

Expected causes, specified as a cell array of character vectors or an array of `meta.class` instances.

The testing results in a qualification failure if any causes specified in `CausedBy` are not found within the cause tree.

Default: `{}`

`'WhenNargoutIs'`

Number of outputs the constraint should request when invoking the function handle, specified as a non-negative, real, scalar integer.

Default: `0`

`'RespectingSet'`

Indicator whether to respect the set of expected causes, specified as `false` or `true` (`logical` `0` or `1`). When this value is `false`, the instance ignores additional causes. When set to `true`, the instance is sensitive to additional causes. A `true` value means that the constraint is not satisfied if the expected exceptions contain causes that are not specified in the `'CausedBy'` name-value pair.

Default: `0`

Properties

`ExpectedException`

Expected `MException` identifier or class. Set this read-only property through the constructor via the `excep` input argument.

`Nargout`

Number of output arguments the instance uses when executing functions. Set this property through the constructor via the name-value pair argument, `'WhenNargoutIs'`.

RequiredCauses

Expected causes for the function handle throwing an `MException`. Set this property through the constructor via the name-value pair argument, `'CausedBy'`.

RespectSet

Indicator if the constraint respects set elements, specified through the constructor via the name-value pair argument, `'RespectingSet'`.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Instantiate Throws Constraint

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.Throws

testCase = TestCase.forInteractiveUse;
```

Verify that a function throws a specified error id.

```
testCase.verifyThat(@() error('SOME:error:id','Error!'), ...
    Throws('SOME:error:id'))
```

```
Interactive verification passed.
```

Verify that a function throws a specified exception class.

```
testCase.verifyThat(@() error('SOME:error:id','Error!'), ...
    Throws(?MException))
```

```
Interactive verification passed.
```

Verify that a function, when called with a specified number of outputs, throws a specified error.

```
testCase.verifyThat(@() disp('hi'), Throws('MATLAB:maxlhs', ...
    'WhenNargoutIs', 1))
```

```
Interactive verification passed.
```

Check causes by identifier.

```
me = MException('TOP:error:id','TopLevelError!');
causeBy1 = MException('causedBy:someOtherError:id','CausedByError!');
causeBy2 = MException('causedBy:yetAnotherError:id','AnotherCausedByError!');
me  = me.addCause(causeBy1);
me  = me.addCause(causeBy2);

testCase.verifyThat(@() me.throw, Throws('TOP:error:id','CausedBy',...
    {'causedBy:someOtherError:id'}))
```

```
Interactive verification passed.
```

Check that the exception does not include any additional causes than the ones specified by `'CausedBy'`.

```
testCase.verifyThat(@() me.throw, Throws('TOP:error:id','CausedBy',...
    {'causedBy:someOtherError:id'},'RespectingSet',true))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
Throws failed.
--> The following causes were unexpectedly found in the exception tree:
    --> 'causedBy:yetAnotherError:id'

Actual Error Report:
    Error using @()me.throw
    TopLevelError!

    Caused by:
        CausedByError!
        AnotherCausedByError!

Actual Error Structure:
    ?MException 'TOP:error:id'
    --> ?MException 'causedBy:someOtherError:id'
    --> ?MException 'causedBy:yetAnotherError:id'
```

```
Evaluated Function:
        @()me.throw
```

Check causes by class.

```
me = MException('TOP:error:id','TopLevelError!');
causeBy = MException('causedBy:someOtherError:id','CausedByError!');
me = me.addCause(causeBy);
testCase.verifyThat(@() me.throw, Throws('TOP:error:id','CausedBy', ...
    ?MException))
```

```
Interactive verification passed.
```

Verify that if the actual value is not a function handle, the constraint is not satisfied.

```
testCase.fatalAssertThat(5, Throws('some:id'))
```

```
Interactive fatal assertion failed.

----------------------
Framework Diagnostic:
----------------------
Throws failed.
--> The value must be an instance of the expected type.

    Actual Class:
        double
    Expected Type:
        function_handle

Actual Value:
         5
Fatal assertion failed.
```

Verify that if the function does not throw an exception, the constraint is not satisfied.

```
testCase.assumeThat(@rand, Throws(?MException))
```

```
Interactive assumption failed.

----------------------
Framework Diagnostic:
----------------------
Throws failed.
--> The function did not throw any exception.
```

```
    Expected Exception:
        --> ?MException

Evaluated Function:
        @rand
Assumption failed.
```

Verify that if the function issues a non-specified error identifier, the constraint is not satisfied.

```
testCase.verifyThat(@() error('SOME:id','Error!'), Throws('OTHER:id'))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
Throws failed.
--> The function threw the wrong exception.

    Actual Exception:
        'SOME:id'
    Expected Exception:
        'OTHER:id'

Actual Error Report:
    Error using @()error('SOME:id','Error!')
    Error!

Evaluated Function:
        @()error('SOME:id','Error!')
```

Verify that if the function throws an exception and the cause does not match the specified identifier, the constraint is not satisfied.

```
testCase.verifyThat(@() error('TOP:error:id','TopLevelError!'), ...
    Throws('TOP:error:id','CausedBy',{'causedBy:someOtherError:id'}))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
Throws failed.
```

```
--> The following causes were not found in the exception tree:
    --> 'causedBy:someOtherError:id'

Actual Error Report:
    Error using @()error('TOP:error:id','TopLevelError!')
    TopLevelError!

Actual Error Structure:
    ?MException 'TOP:error:id'

Evaluated Function:
        @()error('TOP:error:id','TopLevelError!')
```

See Also

See Also

MException | matlab.unittest.constraints.IssuesWarnings | `error` | `matlab.unittest.constraints`

Topics

"Message Identifiers"

Introduced in R2013a

matlab.unittest.constraints.Tolerance class

Package: matlab.unittest.constraints

Abstract interface class for tolerances

Description

Tolerances define a notion of fuzzy equality for a set of data types and can be plugged in to the `IsEqualTo` constraint through the `'Within'` name-value pair argument.

Classes that derive from the `Tolerance` interface class must provide a tolerance definition. Use the `satisfiedBy` method to implement the tolerance definition. Classes that derive from the `Tolerance` class also must provide a diagnostic for two compared values. The testing framework uses the diagnostic when the compared values are outside of the allowable tolerance. Use the `getDiagnosticFor` method to implement this condition. Finally, classes that derive from the `Tolerance` class must provide a means to determine which data types the tolerance supports. Define the supported data types by implementing the `supports` method.

Methods

getDiagnosticFor	Produce diagnostic for two values specified to be within tolerance
satisfiedBy	Determine whether two values are within tolerance
supports	Determine whether tolerance supports specified data type

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

Topics

"Create Custom Tolerance"

getDiagnosticFor

Class: matlab.unittest.constraints.Tolerance
Package: matlab.unittest.constraints

Produce diagnostic for two values specified to be within tolerance

Syntax

```
diag = getDiagnosticFor(tolObj,actVal,expVal)
```

Description

`diag = getDiagnosticFor(tolObj,actVal,expVal)` produces a diagnostic, `diag`, for a value, `actVal`, evaluated against another value, `expVal`, within the tolerance defined by `tolObj`. When creating a custom tolerance, the class author must implement the `getDiagnosticFor` method so that it analyzes the two values, `actVal` and `expVal`, against the tolerance, `tolObj`, and instantiates and returns a `matlab.unittest.diagnostics.Diagnostic` object.

Typically, this diagnostic is used when the `getDiagnosticFor` method of `IsEqualTo` is invoked, and the result is incorporated into the diagnostic output of the `IsEqualTo` constraint.

Input Arguments

`actVal`

Value to determine if is within tolerance of `expVal`

`tolObj`

`Tolerance` instance

`expVal`

Expected value

See Also

See Also

ConstraintDiagnostic | Diagnostic | satisfiedBy | supports

Topics

"Create Custom Tolerance"

satisfiedBy

Class: matlab.unittest.constraints.Tolerance
Package: matlab.unittest.constraints

Determine whether two values are within tolerance

Syntax

```
TF = satisfiedBy(tolObj,actVal,expVal)
```

Description

`TF = satisfiedBy(tolObj,actVal,expVal)` determines whether two values, `actVal` and `expVal`, are within the tolerance defined by `tolObj`. The `satisfiedBy` method is used to determine whether the tolerance is met. It returns `true` or `false` (`logical` `0` or `1`). When creating a custom tolerance, a class author uses this method to contain the tolerance definition.

Input Arguments

`actVal`

Value to determine if is within tolerance of `expVal`

`tolObj`

`Tolerance` instance

`expVal`

Expected value

See Also

See Also

getDiagnosticFor | supports

Topics

"Create Custom Tolerance"

supports

Class: matlab.unittest.constraints.Tolerance
Package: matlab.unittest.constraints

Determine whether tolerance supports specified data type

Syntax

```
TF = supports(tolObj,typeVal)
```

Description

`TF = supports(tolObj,typeVal)` determines whether the tolerance supports a specific data type. It returns `true` or `false` (`logical` `0` or `1`).

The `supports` method provides the ability for a tolerance author to specify support for data types. Generally, the method operates by examining the type of `typeVal` to determine whether it is supported.

Input Arguments

`tolObj`

`Tolerance` instance

`typeVal`

Value used to determine tolerance support

See Also

See Also

getDiagnosticFor | satisfiedBy

Topics

"Create Custom Tolerance"

contrast

Grayscale colormap for contrast enhancement

Syntax

```
cmap = contrast(X)
cmap = contrast(X,m)
```

Description

The `contrast` function enhances the contrast of an `image`. It creates a new gray colormap, `cmap`, that has an approximately equal intensity distribution. All three elements in each row are identical.

`cmap = contrast(X)` returns a gray colormap that is the same length as the current colormap. If there are `NaN` or `Inf` elements in `X` the length of the colormap increases.

`cmap = contrast(X,m)` returns an `m`-by-3 gray colormap.

Examples

Display Image with Gray Colormap

Load `clown` to get image `X` and its associated colormap, `map`. Display the image produced by `X` and `map`.

```
load clown
figure
image(X)
colormap(map)
```

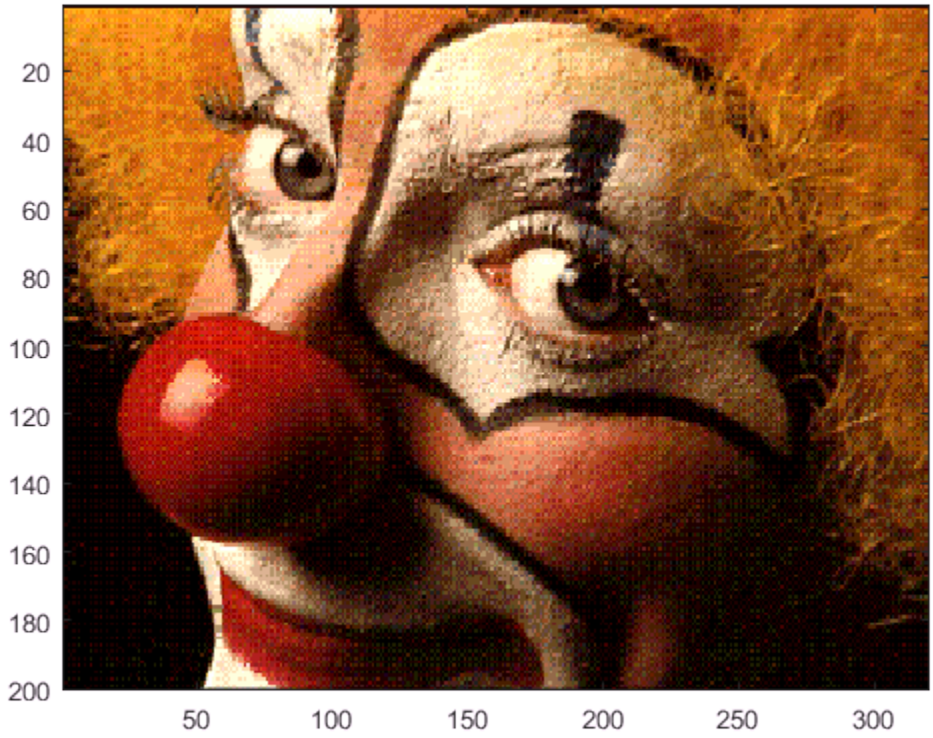

Use `contrast` to return a gray colormap that is the same length as the current colormap, `map`. Display the image with the new colormap, `cmap`.

```
cmap = contrast(X);
colormap(cmap)
```

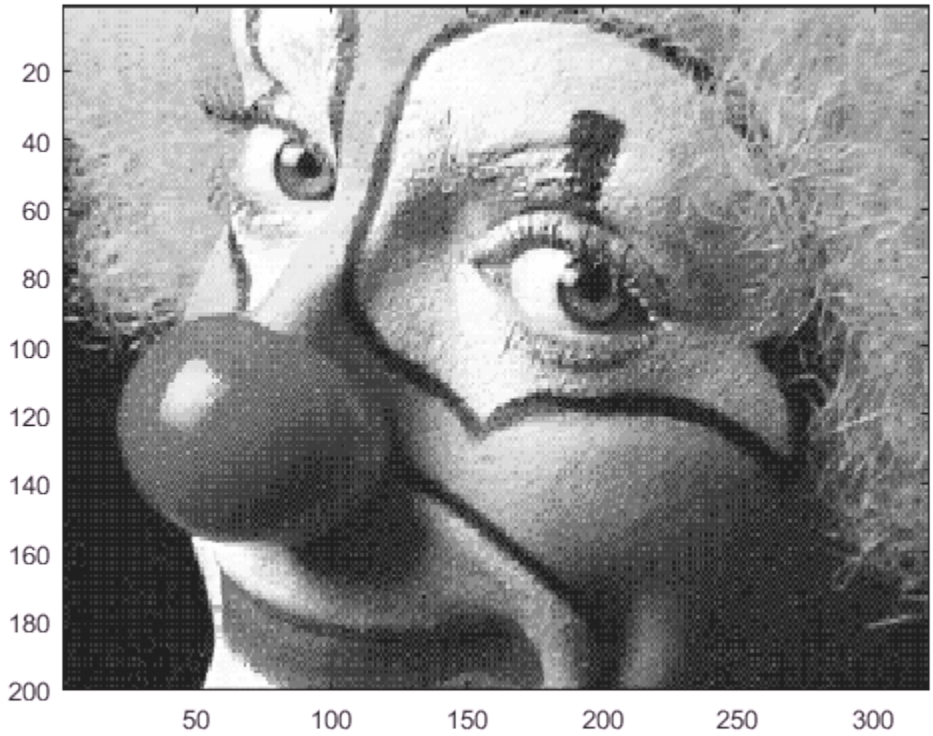

See Also

`brighten` | `image` | `colormap`

Introduced before R2006a

conv

Convolution and polynomial multiplication

Syntax

```
w = conv(u,v)
w = conv(u,v,shape)
```

Description

`w = conv(u,v)` returns the convolution of vectors `u` and `v`. If `u` and `v` are vectors of polynomial coefficients, convolving them is equivalent to multiplying the two polynomials.

`w = conv(u,v,shape)` returns a subsection of the convolution, as specified by `shape`. For example, `conv(u,v,'same')` returns only the central part of the convolution, the same size as `u`, and `conv(u,v,'valid')` returns only the part of the convolution computed without the zero-padded edges.

Examples

Polynomial Multiplication via Convolution

Create vectors `u` and `v` containing the coefficients of the polynomials $x^2 + 1$ and $2x + 7$.

```
u = [1 0 1];
v = [2 7];
```

Use convolution to multiply the polynomials.

```
w = conv(u,v)
```

```
w =

     2     7     2     7
```

w contains the polynomial coefficients for $2x^3 + 7x^2 + 2x + 7$.

Vector Convolution

Create two vectors and convolve them.

```
u = [1 1 1];
v = [1 1 0 0 0 1 1];
w = conv(u,v)
```

```
w =

     1     2     2     1     0     1     2     2     1
```

The length of w is `length(u)+length(v)-1`, which in this example is 9.

Central Part of Convolution

Create two vectors. Find the central part of the convolution of u and v that is the same size as u.

```
u = [-1 2 3 -2 0 1 2];
v = [2 4 -1 1];
w = conv(u,v,'same')
```

```
w =

    15     5    -9     7     6     7    -1
```

w has a length of 7. The full convolution would be of length `length(u)+length(v)-1`, which in this example would be 10.

Input Arguments

u,v — Input vectors
vectors

Input vectors, specified as either row or column vectors. The vectors `u` and `v` can be different lengths or data types.

When `u` or `v` are of type `single`, then the output is of type `single`. Otherwise, `conv` converts inputs to type `double` and returns type `double`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

`shape` — Subsection of convolution
`'full'` (default) | `'same'` | `'valid'`

Subsection of the convolution, specified as `'full'`, `'same'`, or `'valid'`.

`'full'`	Full convolution (default).
`'same'`	Central part of the convolution of the same size as `u`.
`'valid'`	Only those parts of the convolution that are computed without the zero-padded edges. Using this option, `length(w)` is `max(length(u)-length(v)+1,0)`, except when `length(v)` is zero. If `length(v) = 0`, then `length(w) = length(u)`.

Definitions

Convolution

The convolution of two vectors, `u` and `v`, represents the area of overlap under the points as `v` slides across `u`. Algebraically, convolution is the same operation as multiplying polynomials whose coefficients are the elements of `u` and `v`.

Let `m = length(u)` and `n = length(v)` . Then `w` is the vector of length `m+n-1` whose `k`th element is

$$w(k) = \sum_j u(j)v(k-j+1).$$

The sum is over all the values of `j` that lead to legal subscripts for `u(j)` and `v(k-j+1)`, specifically `j = max(1,k+1-n):1:min(k,m)`. When `m = n`, this gives

```
w(1) = u(1)*v(1)
w(2) = u(1)*v(2)+u(2)*v(1)
w(3) = u(1)*v(3)+u(2)*v(2)+u(3)*v(1)
...
w(n) = u(1)*v(n)+u(2)*v(n-1)+ ... +u(n)*v(1)
...
w(2*n-1) = u(n)*v(n)
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

- The inputs A and B must be column vectors.
- B cannot be a tall array.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

For information about C/C++ code generation limitations, see "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`conv2` | `convmtx` | `convn` | `deconv` | `filter` | `xcorr`

Introduced before R2006a

conv2

2-D convolution

Syntax

```
C = conv2(A,B)
C = conv2(u,v,A)
C = conv2( ___ ,shape)
```

Description

`C = conv2(A,B)` returns the two-dimensional convolution of matrices `A` and `B`.

`C = conv2(u,v,A)` first convolves each column of `A` with the vector `u`, and then it convolves each row of the result with the vector `v`.

`C = conv2( ___ ,shape)` returns a subsection of the convolution according to `shape`. For example, `C = conv2(A,B,'same')` returns the central part of the convolution, which is the same size as `A`.

Examples

2-D Convolution

In applications such as image processing, it can be useful to compare the input of a convolution directly to the output. The `conv2` function allows you to control the size of the output.

Create a 3-by-3 random matrix `A` and a 4-by-4 random matrix `B`. Compute the full convolution of `A` and `B`, which is a 6-by-6 matrix.

```
A = rand(3);
B = rand(4);
Cfull = conv2(A,B)
```

```
Cfull =

    0.7861    1.2768    1.4581    1.0007    0.2876    0.0099
    1.0024    1.8458    3.0844    2.5151    1.5196    0.2560
    1.0561    1.9824    3.5790    3.9432    2.9708    0.7587
    1.6790    2.0772    3.0052    3.7511    2.7593    1.5129
    0.9902    1.1000    2.4492    1.6082    1.7976    1.2655
    0.1215    0.1469    1.0409    0.5540    0.6941    0.6499
```

Compute the central part of the convolution `Csame`, which is a submatrix of `Cfull` with the same size as `A`. `Csame` is equal to `Cfull(3:5,3:5)`.

```
Csame = conv2(A,B,'same')
```

```
Csame =

    3.5790    3.9432    2.9708
    3.0052    3.7511    2.7593
    2.4492    1.6082    1.7976
```

Extract 2-D Pedestal Edges

The Sobel edge-finding operation uses a 2-D convolution to detect edges in images and other 2-D data.

Create and plot a 2-D pedestal with interior height equal to one.

```
A = zeros(10);
A(3:7,3:7) = ones(5);
mesh(A)
```

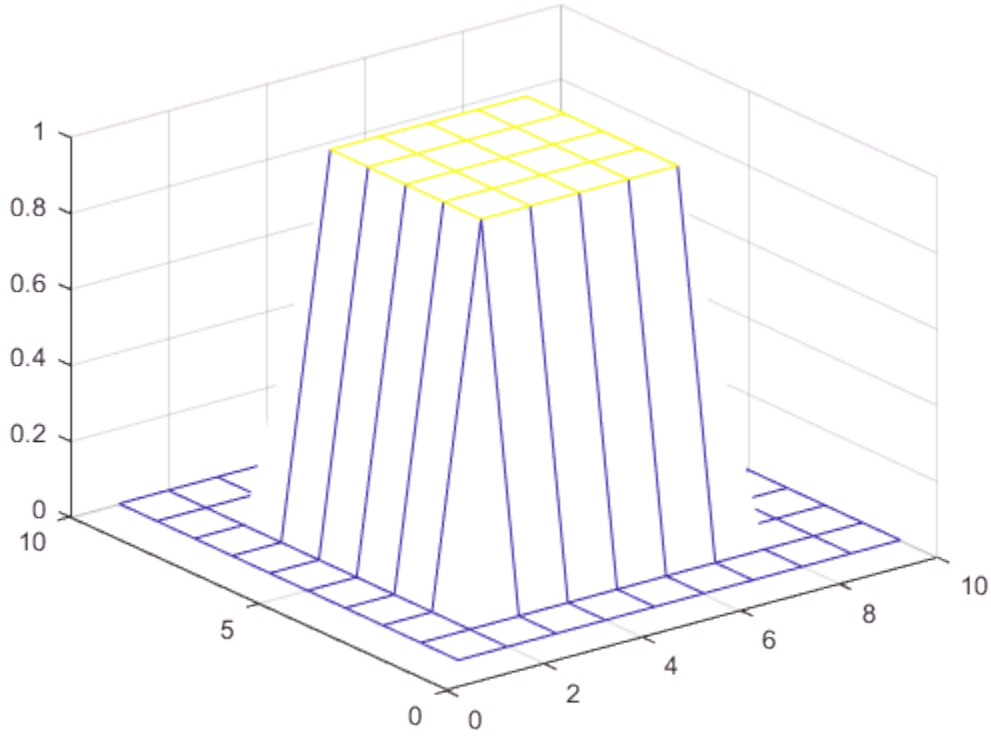

Convolve the rows of A with the vector u, and then convolve the rows of the result with the vector v. The convolution extracts the horizontal edges of the pedestal.

```
u = [1 0 -1]';
v = [1 2 1];
Ch = conv2(u,v,A);
mesh(Ch)
```

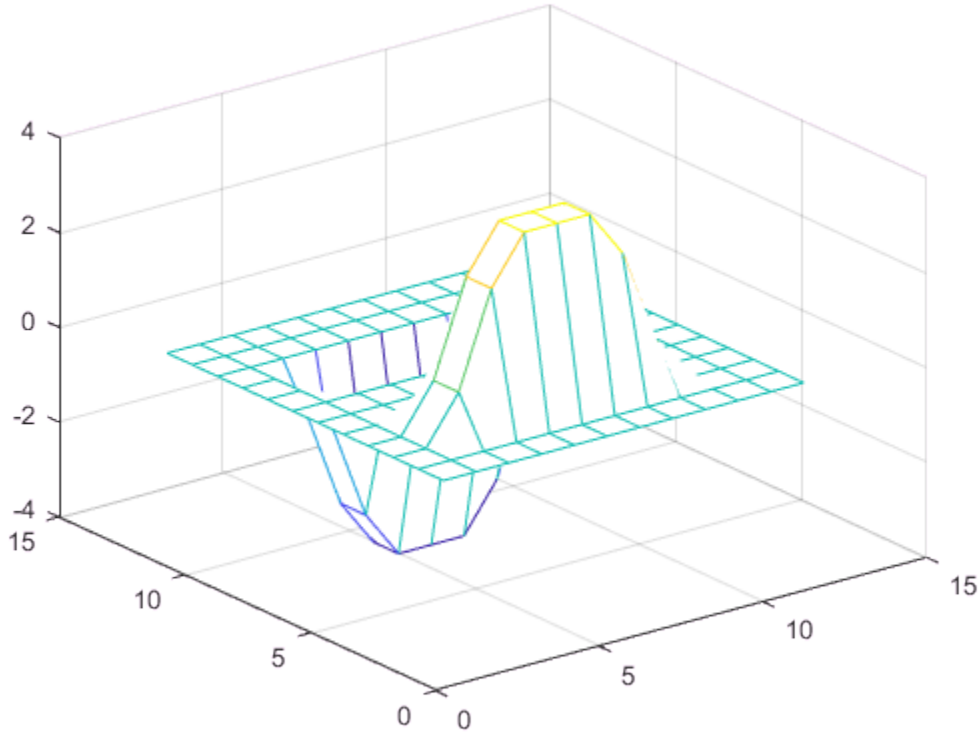

To extract the vertical edges of the pedestal, reverse the order of convolution with `u` and `v`.

```
Cv = conv2(v,u,A);
mesh(Cv)
```

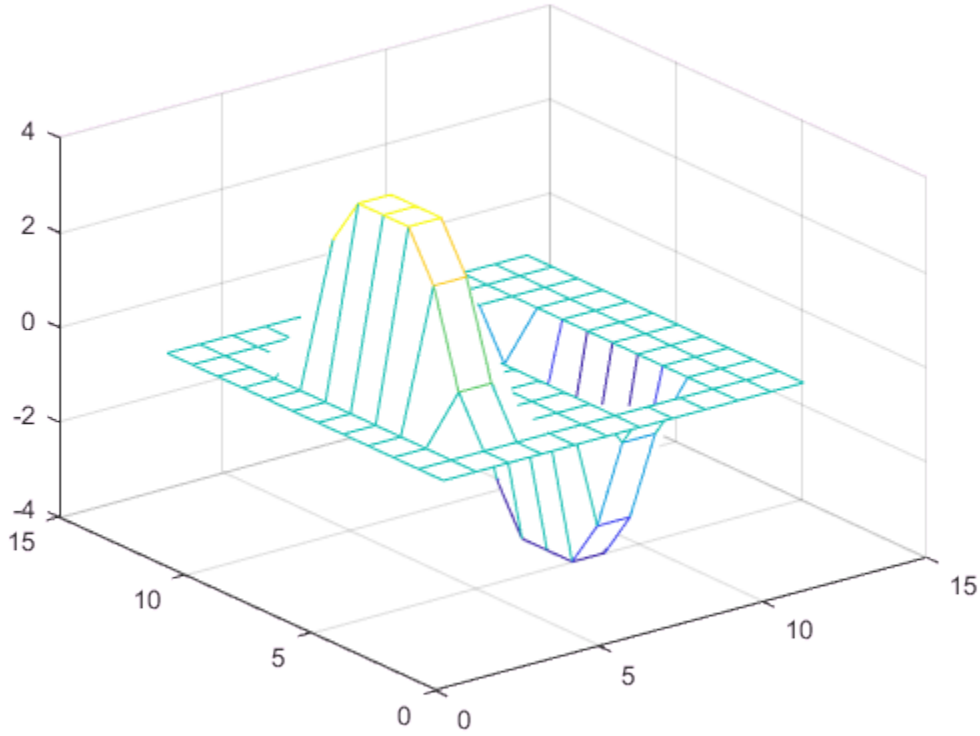

Compute and plot the combined edges of the pedestal.

```
figure
mesh(sqrt(Ch.^2 + Cv.^2))
```

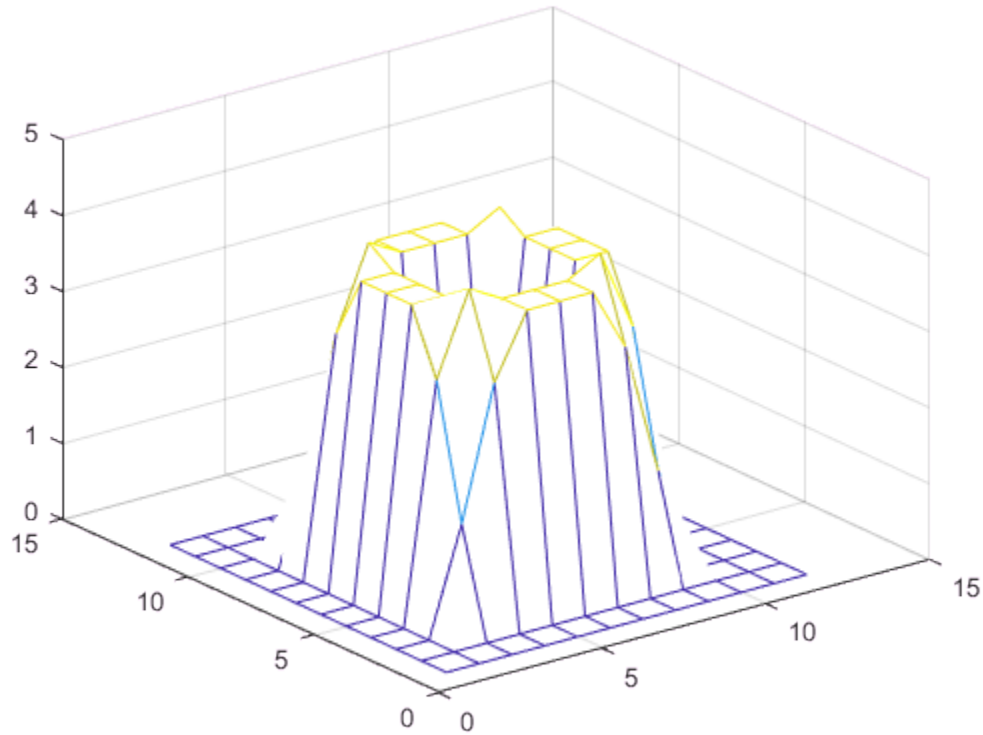

Input Arguments

A — Input array

vector | matrix

Input array, specified as a vector or matrix.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

B — Second input array

vector | matrix

Second input array, specified as a vector or a matrix to convolve with A. The array B does not have to be the same size as A.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical
Complex Number Support: Yes

u — Input vector

row or column vector

Input vector, specified as a row or column vector. u convolves with each column of A.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical
Complex Number Support: Yes

v — Second input vector

row or column vector

Second input vector, specified as a row or column vector. v convolves with each row of the convolution of u with the columns of A.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical
Complex Number Support: Yes

shape — Subsection of convolution

'full' (default) | 'same' | 'valid'

Subsection of the convolution, specified as one of these values:

- 'full' — Return the full 2-D convolution.
- 'same' — Return the central part of the convolution, which is the same size as A.
- 'valid' — Return only parts of the convolution that are computed without zero-padded edges.

Output Arguments

C — 2-D convolution
vector | matrix

2-D convolution, returned as a vector or matrix. When A and B are matrices, then the convolution `C = conv2(A,B)` has size `size(A)+size(B)-1`. When `[m,n] = size(A)`, `p = length(u)`, and `q = length(v)`, then the convolution `C = conv2(u,v,A)` has `m+p-1` rows and `n+q-1` columns.

When one or more input arguments to `conv2` are of type `single`, then the output is of type `single`. Otherwise, `conv2` converts inputs to type `double` and returns type `double`.

Data Types: `double` | `single`

Definitions

2-D Convolution

For discrete, two-dimensional variables *A* and *B*, the following equation defines the convolution of *A* and *B*:

$$C(j,k) = \sum_p \sum_q A(p,q)B(j-p+1,k-q+1)$$

p and *q* run over all values that lead to legal subscripts of *A(p,q)* and *B(j-p+1,k-q+1)*.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

conv | convn

Introduced before R2006a

convhull

Convex hull

Note: Qhull-specific options are no longer supported. Remove the `OPTIONS` argument from all instances in your code that pass it to `convhull`.

Syntax

```
K = convhull(X,Y)
K = convhull(X,Y,Z)
K = convhull(X)
K = convhull(...,'simplify', logicalvar)
[K,V] = convhull(...)
```

Description

`K = convhull(X,Y)` returns the 2-D convex hull of the points (`X`,`Y`), where `X` and `Y` are column vectors. The convex hull `K` is expressed in terms of a vector of point indices arranged in a counterclockwise cycle around the hull.

`K = convhull(X,Y,Z)` returns the 3-D convex hull of the points (`X`,`Y`,`Z`), where `X`, `Y`, and `Z` are column vectors. `K` is a triangulation representing the boundary of the convex hull. `K` is of size `mtri`-by-3, where `mtri` is the number of triangular facets. That is, each row of `K` is a triangle defined in terms of the point indices.

`K = convhull(X)` returns the 2-D or 3-D convex hull of the points `X`. This variant supports the definition of points in matrix format. `X` is of size `mpts`-by-`ndim`, where `mpts` is the number of points and `ndim` is the dimension of the space where the points reside, 2 ≦ `ndim` ≦ 3. The output facets are equivalent to those generated by the 2-input or 3-input calling syntax.

`K = convhull(...,'simplify', logicalvar)` provides the option of removing vertices that do not contribute to the area/volume of the convex hull, the default is false. Setting `'simplify'` to true returns the topology in a more concise form.

`[K,V] = convhull(...)` returns the convex hull `K` and the corresponding area/volume `V` bounded by `K`.

Visualization

Use `plot` to plot the output of `convhull` in 2-D. Use `trisurf` or `trimesh` to plot the output of convhull in 3-D.

Examples

Plot 2-D Convex Hull

```
xx = -1:.05:1;
yy = abs(sqrt(xx));
[x,y] = pol2cart(xx,yy);
k = convhull(x,y);
plot(x(k),y(k),'r-',x,y,'b*')
```

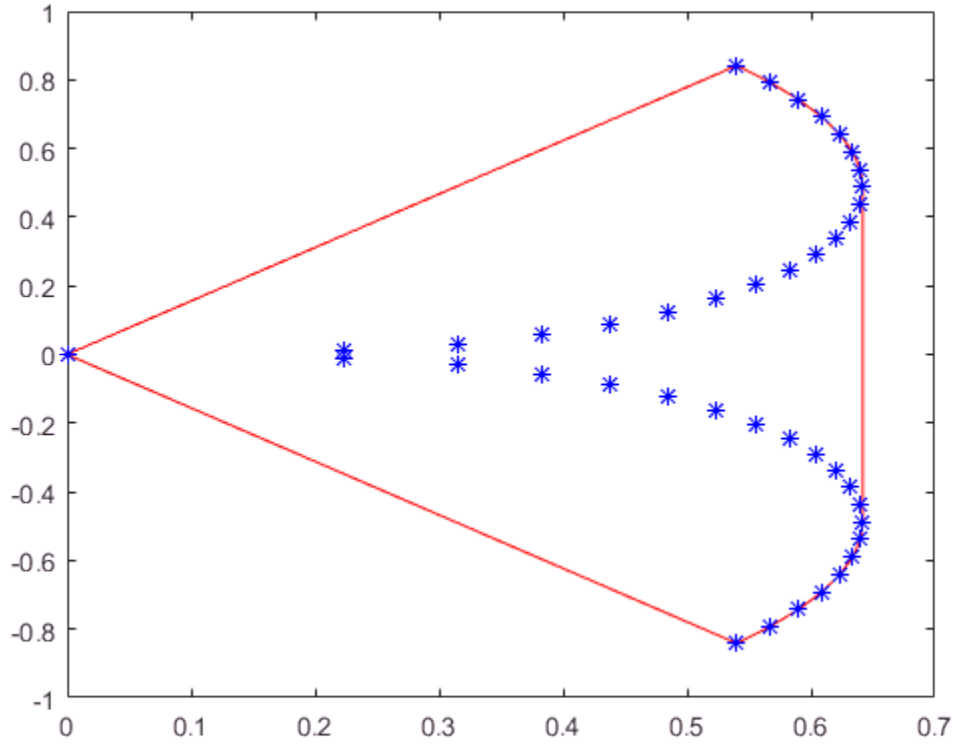

Definitions

Convex Hull

`convhull` returns the convex hull of a set of points in 2-D or 3-D space.

See Also

convexHull | voronoiDiagram | `convhulln` | `delaunay` | `polyarea` | `voronoi`

Introduced before R2006a

convhulln

N-D convex hull

Syntax

```
K = convhulln(X)
K = convhulln(X,options)
[K,v] = convhulln(...)
```

Description

`K = convhulln(X)` returns the indices `K` of the points in `X` that make up the facets of the convex hull of `X`. If `X` contains 2-D coordinates or 3-D coordinates, then the facets form triangles or tetrahedra, respectively. In general, `X` can be an `m`-by-`n` array representing `m` points in `n`-dimensional space. If the convex hull has `p` facets then `K` has size `p`-by-`n`.

`convhulln` uses Qhull.

`K = convhulln(X,options)` specifies a cell array of Qhull options. The default options are:

- `{'Qt'}` for 2-, 3-. and 4-dimensional input
- `{'Qt','Qx'}` for 5-dimensional input and higher.

If `options` is `[]`, the default options are used. For more information on Qhull and its options, see http://www.qhull.org/.

`[K,v] = convhulln(...)` also returns the volume `v` of the convex hull.

Visualization

Plotting the output of `convhulln` depends on the value of `n`:

- For `n = 2`, use `plot` as you would for `convhull`.

- For `n = 3`, you can use `trisurf` to plot the output. The calling sequence is

  ```
  K = convhulln(X);
  trisurf(K,X(:,1),X(:,2),X(:,3))
  ```

- You cannot plot `convhulln` output for `n > 3`.

Examples

The following example illustrates the `options` input for `convhulln`. The following commands

```
X = [0 0; 0 1e-10; 0 0; 1 1];
K = convhulln(X)
```

return a warning.

```
Warning: qhull precision warning:
The initial hull is narrow
(cosine of min. angle is 0.9999999999999998).
A coplanar point may lead to a wide facet.
Options 'QbB' (scale to unit box) or 'Qbb'
(scale last coordinate) may remove this warning.
Use 'Pp' to skip this warning.
```

To suppress the warning, use the option `'Pp'`. The following command passes the option `'Pp'`, along with the default `'Qt'`, to `convhulln`.

```
K = convhulln(X,{'Qt','Pp'})

K =

     1     4
     1     2
     4     2
```

Algorithms

`convhulln` is based on Qhull [1]. For information about Qhull, see http://www.qhull.org/. For copyright information, see http://www.qhull.org/COPYING.txt.

References

[1] Barber, C. B., D.P. Dobkin, and H.T. Huhdanpaa, "The Quickhull Algorithm for Convex Hulls," ACM *Transactions on Mathematical Software*, Vol. 22, No. 4, Dec. 1996, p. 469-483.

See Also

convexHull | `convhull` | `delaunayn` | `dsearchn` | `tsearchn` | `voronoin`

Introduced before R2006a

convn

N-D convolution

Syntax

```
C = convn(A,B)
C = convn(A,B,shape)
```

Description

`C = convn(A,B)` returns the N-dimensional convolution of arrays `A` and `B`.

`C = convn(A,B,shape)` returns a subsection of the convolution according to `shape`. For example, `C = convn(A,B,'same')` returns the central part of the convolution, which is the same size as `A`.

Examples

3-D Convolution

You can control the size of the output of the `convn` function. For example, the `'same'` option trims the outer part of the convolution and returns only the central part, which is the same size as the input.

Convolve a random 2-by-3-by-2 array `A` with a 2-by-2-by-2 kernel `B`. The result is a 3-by-4-by-3 array, which is `size(A) + size(B) - 1`.

```
A = rand(2,3,2);
B = 0.25*ones(2,2,2);
C = convn(A,B)
```

```
C =

(:,:,1) =
```

```
    0.2037    0.2354    0.1898    0.1581
    0.4301    0.6902    0.4426    0.1825
    0.2264    0.4548    0.2527    0.0244


(:,:,2) =

    0.2733    0.5444    0.4686    0.1975
    0.6365    1.3772    1.2052    0.4645
    0.3632    0.8327    0.7366    0.2670


(:,:,3) =

    0.0696    0.3090    0.2788    0.0394
    0.2063    0.6869    0.7627    0.2821
    0.1367    0.3779    0.4839    0.2426
```

```
sizeC = size(A) + size(B) - 1
```

```
sizeC =

     3     4     3
```

Return the central part of the convolution, which is the same size as A.

```
C = convn(A,B,'same')
```

```
C =

(:,:,1) =

    1.3772    1.2052    0.4645
    0.8327    0.7366    0.2670


(:,:,2) =

    0.6869    0.7627    0.2821
    0.3779    0.4839    0.2426
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as vector, a matrix, or a multidimensional array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

B — Second input array

vector | matrix | multidimensional array

Second input array, specified as a vector, a matrix, or a multidimensional array to convolve with A. The array B does not have to be the same size as A.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

shape — Subsection of convolution

`'full'` (default) | `'same'` | `'valid'`

Subsection of the convolution, specified as one of these values:

- `'full'` — Return the full N-D convolution.
- `'same'` — Return the central part of the convolution, which is the same size as A.
- `'valid'` — Return only parts of the convolution that are computed without zero-padded edges.

Output Arguments

C — N-D convolution

vector | matrix | multidimensional array

N-D convolution, returned as a vector, a matrix, or a multidimensional array. If A and B have the same number of dimensions, the full convolution `C = convn(A,B)` has size `size(A)+size(B)-1`.

When one or both of `A` and `B` are of type `single`, then the output is of type `single`. Otherwise, `convn` converts inputs to type `double` and returns type `double`.

Data Types: `double` | `single`

Definitions

N-D Convolution

For discrete, N-dimensional variables A and B, this equation defines the convolution of A and B:

$$C(j_1, j_2, \ldots, j_N) = \sum_{k_1} \sum_{k_2} \ldots \sum_{k_N} A(k_1, k_2, \ldots, k_N) B(j_1 - k_1, j_2 - k_2, \ldots, j_N - k_N)$$

Each k_i runs over all values that lead to legal subscripts of A and B.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`conv` | `conv2`

Introduced before R2006a

copper

Copper colormap array

Syntax

```
c = copper
c = copper(m)
```

Description

`c = copper` returns the copper colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = copper(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the copper colormap.

```
surf(peaks);
colormap('copper');
```

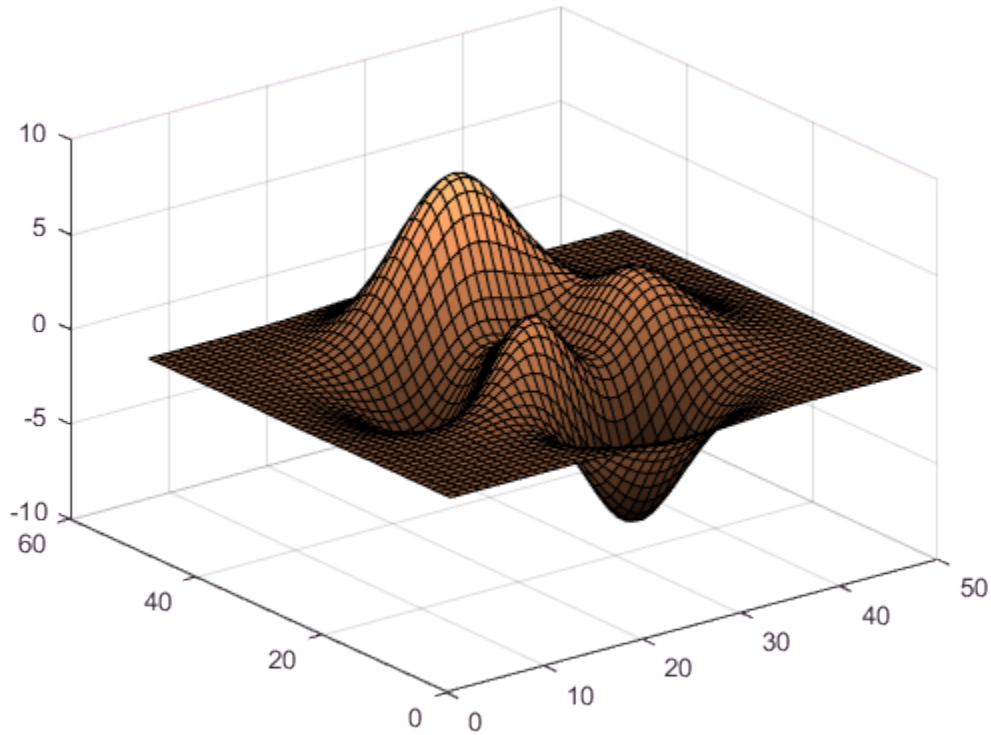

Get the copper colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = copper;
c = flipud(c);
colormap(c);
```

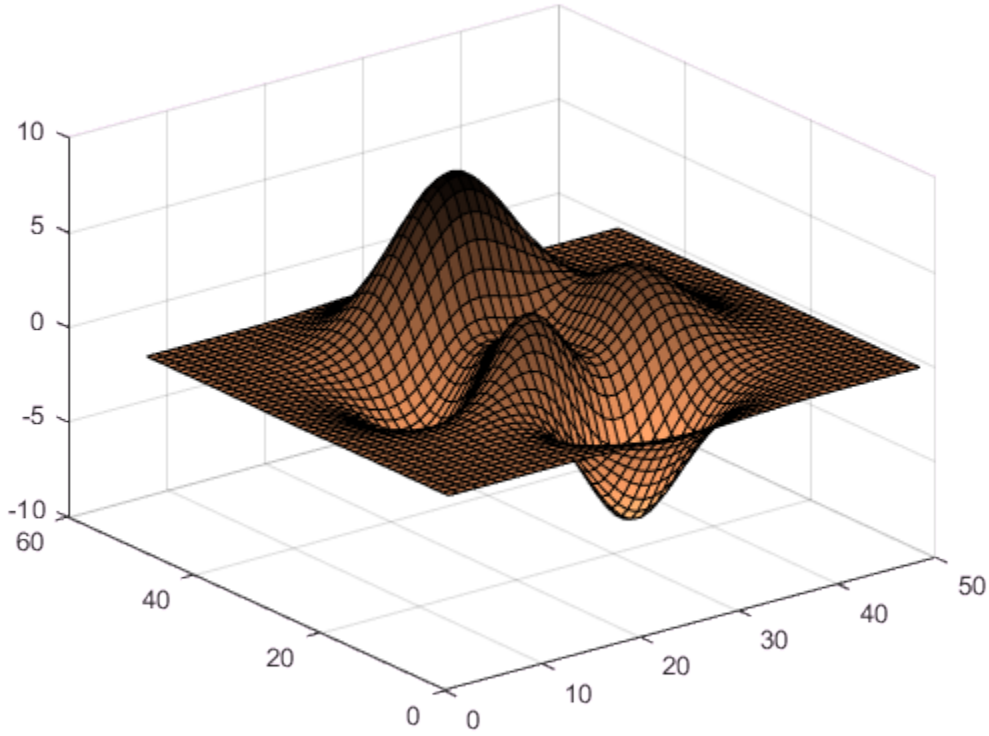

Downsample the Copper Colormap

Get a downsampled version of the copper colormap containing only ten colors. Then display the contours of the peaks function by applying the colormap and interpolated shading.

```
c = copper(10);
surf(peaks);
colormap(c);
shading interp;
```

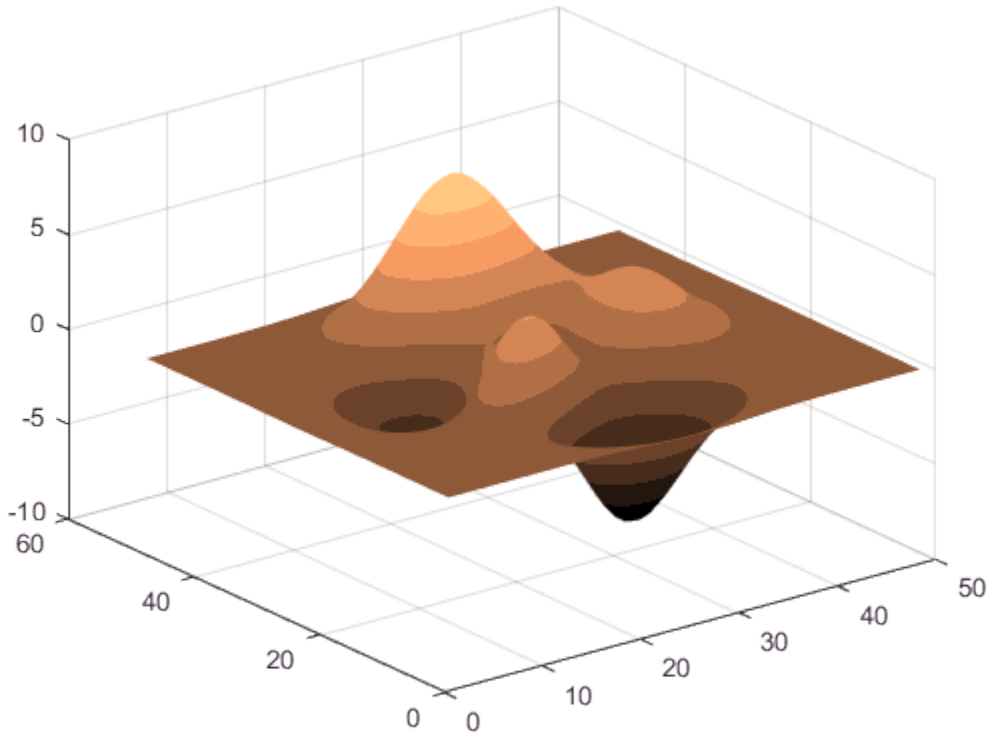

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

matlab.mixin.CustomDisplay class

Package: matlab.mixin

Interface for customizing object display

Description

This class provides an interface for customizing the way MATLAB displays objects. Derive your class from `matlab.mixin.CustomDisplay` to add the custom display functionality to your class.

For customizing object display, `matlab.mixin.CustomDisplay` defines a number of protected methods that you can override in your subclass. By overriding specific methods, you can customize specific aspects of the object display.

`matlab.mixin.CustomDisplay` also implements three public, sealed methods. `disp` and `display` provide a simple object display. The `details` method provides a standard formal display of object information.

Note: You cannot use `matlab.mixin.CustomDisplay` to derive a custom display for enumeration classes. For an alternative approach, see "Overloading the disp Function"

Methods

convertDimensionsToString	Return array dimensions as text
displayEmptyObject	Display for empty object arrays
displayNonScalarObject	Display format for non-scalar objects
displayPropertyGroups	Display titles and property groups as defined
displayScalarHandleToDeletedObject	Display format for deleted scalar handles
displayScalarObject	Display format for scalar objects
getClassNameForHeader	Return class name for display

getDeletedHandleText	Returns text for handle to deleted object display
getDetailedFooter	Returns default detailed footer for object display
getDetailedHeader	Returns default detailed header for object display
getFooter	Build and return display footer text
getHandleText	Return text `'handle'` with link to documentation
getHeader	Build and return display header text
getPropertyGroups	Construct array of property groups
getSimpleHeader	Return simple header for object display

Attributes

`Abstract`	This class defines an interface that subclasses inherit. You cannot instantiate this class.
`HandleCompatible`	You can use this class to derive both handle and value classes.

See Also

See Also

matlab.mixin.util.PropertyGroup

Topics

"Custom Display Interface"

Introduced in R2013b

matlab.mixin.CustomDisplay.convertDimensionsToString

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Return array dimensions as text

Syntax

```
dimstr = matlab.mixin.CustomDisplay.convertDimensionsToString(obj)
```

Description

`dimstr = matlab.mixin.CustomDisplay.convertDimensionsToString(obj)` converts a size vector into a properly formatted text of dimensions for the nonscalar header.

Input Arguments

`obj`

MATLAB object

Output Arguments

`dimstr`

Text representing the object's dimensions as determined by calling `size`.

Attributes

`Static`	`true`
`Access`	`Protected`

`Sealed`	`true`
`Hidden`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.CustomDisplay.getHeader

Topics

"Custom Display Interface"

displayEmptyObject

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Display for empty object arrays

Syntax

```
displayEmptyObject(obj)
```

Description

`displayEmptyObject(obj)` is called by `disp` when the object, `obj`, is empty. An object array is empty if one or more of its dimensions are zero. An empty object array is never scalar.

The default display of an empty object consists of a header and a list of property names. The header consists of the object's dimensions and the properties are shown in the order defined in the class definition. `displayEmptyObject` shows only those properties with public `GetAccess` and `Hidden` set to `false`.

Override this method to customize the appearance of an empty object array.

Input Arguments

`obj`

Object of a class derived from `matlab.mixin.CustomDisplay`

Default:

Attributes

`Access`	`protected`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.CustomDisplay.displayScalarObject |
matlab.mixin.CustomDisplay.displayNonScalarObject |
matlab.mixin.CustomDisplay.displayScalarHandleToDeletedObject

Topics

"Custom Display Interface"

displayNonScalarObject

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Display format for non-scalar objects

Syntax

```
displayNonScalarObject(obj)
```

Description

`displayNonScalarObject(obj)` is called by the `disp` method when the object, `obj`, is nonscalar (`prod(size(obj)) > 1`)

The default display of a nonscalar object array consists of a header and a list of property names. The header consists of the object's dimensions and the properties are shown in the order defined in the class definition. `displayNonScalarObject` shows only those properties with public `GetAccess` and `Hidden` set to `false`.

Override this method to customize the display a nonscalar object array.

Input Arguments

`obj`

Object array of a class derived from `matlab.mixin.CustomDisplay`

Default:

Attributes

`Access`	`protected`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.CustomDisplay.displayScalarObject |
matlab.mixin.CustomDisplay.displayEmptyObject |
matlab.mixin.CustomDisplay.displayScalarHandleToDeletedObject

Topics

"Custom Display Interface"

matlab.mixin.CustomDisplay.displayPropertyGroups

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Display titles and property groups as defined

Syntax

```
matlab.mixin.CustomDisplay.displayPropertyGroups(obj,
propertyGroupArray)
```

Description

`matlab.mixin.CustomDisplay.displayPropertyGroups(obj, propertyGroupArray)` displays titles and custom property lists as defined by the property groups.

Input Arguments

`obj`

MATLAB object

Default:

`propertyGroupArray`

Array of `matlab.mixin.util.PropertyGroup` objects.

Default:

Attributes

`Static`	`true`

`Access`	`Protected`
`Sealed`	`true`
`Hidden`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

PropertyGroup

Topics

"Custom Display Interface"

displayScalarHandleToDeletedObject

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Display format for deleted scalar handles

Syntax

```
displayScalarHandleToDeletedObject(obj)
```

Description

`displayScalarHandleToDeletedObject(obj)` is called by the `disp` method when `obj` is:

- An instance of a handle class
- Scalar
- A handle to a deleted object

That is, the following expression is `true`.

```
isa(obj,'handle') && isscalar(obj) && ~isvalid(obj)
```

Override this method to customize the appearance of your object's display when it is deleted.

Input Arguments

`obj`

Object of a class derived from `matlab.mixin.CustomDisplay`

Default:

Attributes

`Access`	`protected`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.CustomDisplay.displayScalarObject | matlab.mixin.CustomDisplay.displayNonScalarObject | matlab.mixin.CustomDisplay.displayEmptyObject

Topics

"Custom Display Interface"

displayScalarObject

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Display format for scalar objects

Syntax

```
displayScalarObject(obj)
```

Description

`displayScalarObject(obj)` is called by the `disp` method when the object, `obj`, is scalar (`prod(size(obj)) == 1`).

The default display of a scalar object consists of a header and a list of properties and their values. Properties are shown in the order they are defined in the class definition. `displayScalarObject` shows only those properties with public `GetAccess` and `Hidden` set to `false`.

Override this method to customize the display of a scalar object.

Input Arguments

`obj`

Object of a class derived from `matlab.mixin.CustomDisplay`

Default:

Attributes

`Access`	`protected`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.CustomDisplay.displayNonScalarObject | matlab.mixin.CustomDisplay.displayEmptyObject | matlab.mixin.CustomDisplay.displayScalarHandleToDeletedObject

Topics

"Custom Display Interface"

matlab.mixin.CustomDisplay.getClassNameForHeader

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Return class name for display

Syntax

```
name = matlab.mixin.CustomDisplay.getClassNameForHeader(obj)
```

Description

`name = matlab.mixin.CustomDisplay.getClassNameForHeader(obj)` returns the class name of `obj`. If the display supports hypertext links, the text is linked to the help for the class of `obj`.

Use this method when building a custom display that includes the class name, but differs from the default header.

Input Arguments

`obj`

MATLAB object

Default:

Output Arguments

`name`

The simple class name, linked to the help for the class if the display supports hypertext links

Attributes

`Static`	`true`
`Access`	`Protected`
`Sealed`	`true`
`Hidden`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

getHeader

Topics

"Custom Display Interface"

matlab.mixin.CustomDisplay.getDeletedHandleText

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Returns text for handle to deleted object display

Syntax

```
handleText = matlab.mixin.CustomDisplay.getDeletedHandleText
```

Description

`handleText = matlab.mixin.CustomDisplay.getDeletedHandleText` returns the text:

```
'handle to deleted'
```

The text is linked to the documentation on deleted handle objects.

Output Arguments

`handleText`

Text `'handle to deleted'`, linked if the display supports hypertext links

Attributes

`Static`	`true`
`Access`	`Protected`
`Sealed`	`true`
`Hidden`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

getHeader

Topics

"Custom Display Interface"

matlab.mixin.CustomDisplay.getDetailedFooter

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Returns default detailed footer for object display

Syntax

```
headerText = matlab.mixin.CustomDisplay.getDetailedFooter(obj)
```

Description

`headerText = matlab.mixin.CustomDisplay.getDetailedFooter(obj)` returns the text containing:

```
Methods, Events, Superclass
```

Each link executes the respective command on `obj`.

Input Arguments

`obj`

MATLAB object

Output Arguments

`headerText`

Text containing the linked phrase `'Methods, Events, Superclasses'` or an empty character vector if the display does not support hypertext links

Attributes

`Static`	`true`

`Access`	`Protected`
`Sealed`	`true`
`Hidden`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

`events` | getFooter | `methods` | `superclasses`

Topics

"Custom Display Interface"

matlab.mixin.CustomDisplay.getDetailedHeader

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Returns default detailed header for object display

Syntax

```
header = matlab.mixin.CustomDisplay.getDetailedHeader(obj)
```

Description

`header = matlab.mixin.CustomDisplay.getDetailedHeader(obj)` returns text containing:

- Linked class name of `obj`
- Link to handle documentation if `obj` is a handle class
- The text `'with properties:'`

Input Arguments

`obj`

MATLAB object

Output Arguments

`header`

Text containing the full detailed header, with properly inserted links if the display supports hypertext linking

Attributes

`Static`	`true`
`Access`	`Protected`
`Sealed`	`true`
`Hidden`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

handle

Topics

"Custom Display Interface"

getFooter

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Build and return display footer text

Syntax

```
s = getFooter(obj)
```

Description

`s = getFooter(obj)` returns the text used as the footer when displaying `obj`. This method is called once for the entire object array.

Override this method to create a custom footer. The overriding implementation must support all states of the object, including scalar, nonscalar, empty, and deleted (if `obj` is an instance of a handle class).

Input Arguments

`obj`

Object array of a class derived from `matlab.mixin.CustomDisplay`

Output Arguments

`s`

Footer text, returned as a `char` vector.

The default implementation returns an empty `char` vector

Attributes

`Access`	`protected`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.CustomDisplay.getHeader | matlab.mixin.CustomDisplay.getPropertyGroups

Topics

"Custom Display Interface"

matlab.mixin.CustomDisplay.getHandleText

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Return text `'handle'` with link to documentation

Syntax

```
handleText = matlab.mixin.CustomDisplay.getHandleText
```

Description

`handleText = matlab.mixin.CustomDisplay.getHandleText` returns the text `'handle'`. If the display supports hypertext linking, the text is linked to documentation describing handle classes.

Output Arguments

`handleText`

Text `handle`, linked to the handle documentation.

Attributes

`Static`	`true`
`Access`	`Protected`
`Sealed`	`true`
`Hidden`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

getHeader

Topics

"Custom Display Interface"

getHeader

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Build and return display header text

Syntax

```
s = getHeader(obj)
```

Description

`s = getHeader(obj)` returns the text used as the header when displaying `obj`. This method is called once for the entire object array.

Override this method to create a custom header. The overriding implementation must support all states of the object, including scalar, nonscalar, empty, and deleted (if `obj` is an instance of a handle class).

Input Arguments

`obj`

Object array of a class derived from `matlab.mixin.CustomDisplay`

Output Arguments

`s`

Header string, returned as a `char` array

The default implementation returns the following:

- If `obj` is scalar, returns *`classname`*, which is the simple name of the class (the nonpackage-qualified name).

- If `obj` is nonscalar, returns *`classname`* and dimensions.
- If `obj` is empty, returns an empty `char`.
- If `obj` is a deleted handle, returns the string `deleted` *`classname`* `handle`

`classname` is linked to MATLAB documentation for the class. Selecting the link displays the `helpPopup` window.

If you override this method, you might need to terminate `s` with a newline (`\n`) character.

Examples

Append Text to Default Header

Append the text, `'with Customized Display'`, to the header text.

Write a `getHeader` method.

```
methods (Access = protected)
   function header = getHeader(obj)
      if ~isscalar(obj)
         header = getHeader@matlab.mixin.CustomDisplay(obj);
      else
         headerStr = matlab.mixin.CustomDisplay.getClassNameForHeader(obj);
         headerStr = [headerStr,' with Customized Display'];
         header = sprintf('%s\n',headerStr);
      end
   end
end
```

Add `getHeader` method to class definition.

- "Custom Display Interface"

Attributes

`Access`	`protected`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.CustomDisplay.getFooter |
matlab.mixin.CustomDisplay.getPropertyGroups

Topics

"Custom Display Interface"

getPropertyGroups

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Construct array of property groups

Syntax

```
groups = getPropertyGroups(obj)
```

Description

`groups = getPropertyGroups(obj)` returns an array of `matlab.mixin.util.PropertyGroup` objects. MATLAB displays property groups separated by blank spaces.

Each default display state handler method calls this method once. The default implementation returns the properties in one group. These properties must have public `GetAccess` and not be defined as `Hidden`. If the object is scalar, MATLAB includes dynamic properties.

Override this method to construct one or more customized groups of properties to display.

Each group object array has the following fields:

- `Title` — Text used as the header for the property group or an empty string if no title is used.
- `PropertyList` — The property list can be either:
  - A 1-by-1 `struct` of property name-property value pairs
  - A cell array of property names.

Use the `struct` of name-value pairs if the object is scalar and you want to assign custom property values. Otherwise, use a cell array of property names. If the object is scalar MATLAB adds the property values retrieved from the object.

Input Arguments

obj

Object array of a class derived from `matlab.mixin.CustomDisplay`

Default:

Output Arguments

groups

1xN array of `matlab.mixin.util.PropertyGroup` objects, where N is the number of groups

Examples

Custom Property Group

Customize the values returned by some properties.

Write a `getPropertyGroups` method.

```
methods (Access = protected)
   function propgrp = getPropertyGroups(obj)
      if ~isscalar(obj)
         propgrp = getPropertyGroups@matlab.mixin.CustomDisplay(obj);
      else
         pd(1:length(obj.Password)) = '*';
         propList = struct('Department',obj.Department,...
            'JobTitle',obj.JobTitle,...
            'Name',obj.Name,...
            'Salary','Not available',...
            'Password',pd);
         propgrp = matlab.mixin.util.PropertyGroup(propList);
      end
   end
end
```

Add function to class definition.

- “Custom Display Interface”
- “Customize Property Display”

Attributes

`Access`	`protected`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.util.PropertyGroup | matlab.mixin.CustomDisplay.getHeader | matlab.mixin.CustomDisplay.getFooter

Topics

"Custom Display Interface"
"Customize Property Display"

matlab.mixin.CustomDisplay.getSimpleHeader

Class: matlab.mixin.CustomDisplay
Package: matlab.mixin

Return simple header for object display

Syntax

```
header = matlab.mixin.CustomDisplay.getSimpleHeader(obj)
```

Description

`header = matlab.mixin.CustomDisplay.getSimpleHeader(obj)` returns the default simple header for `obj`.

Input Arguments

`obj`

MATLAB object.

Default:

Output Arguments

`header`

Text containing the linked class name and the phrase `'with properties'`

Attributes

`Static`	`true`

`Access`	`Protected`
`Sealed`	`true`
`Hidden`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.CustomDisplay.getHeader

Topics

"Custom Display Interface"

matlab.mixin.Copyable class

Package: matlab.mixin
Superclasses: handle

Superclass providing copy functionality for handle objects

Description

The `matlab.mixin.Copyable` class is an abstract handle class that provides a `copy` method for copying handle objects. The `copy` method makes a shallow copy of the object (that is, it shallow copies all non-dependent properties from the source object to the destination object). MATLAB does not call `copy` recursively on any handles contained in property values.

Subclass `matlab.mixin.Copyable` when you want to define handles classes that inherit a `copy` method. The `copy` method:

- Copies data without calling class constructors or property set functions and therefore produces no side effects.
- Enables subclasses to customize the copy behavior

You can customize copy behavior by subclassing `matlab.mixin.Copyable` and overriding the `copyElement` method. For more information, see the examples"Customizing Subclass Copy Behavior" on page 1-1955 and "Implement Copy for Handle Classes"

Methods

copy	Copy array of handle objects

Examples

Add Copy Method

Add a copy method to your handle class by subclassing `matlab.mixin.Copyable`.

```
classdef MyClass < matlab.mixin.Copyable
   properties
      Prop
   end
end
```

Create an object.

```
a = MyClass;
```

Create a copy of the object.

```
b = copy(a);
```

For more information, see “Implement Copy for Handle Classes”.

Customizing Subclass Copy Behavior

The `copy` method provides the public, non-overrideable interface to copy behavior. `copy` takes an array of objects as input and returns an array of the same dimensions.

`copyElement` is a protected method that the `copy` method uses to perform the copy operation on each object in the input array. `copyElement` is not `Sealed` so you can override it in your subclass to customize the behavior of the inherited `copy` method.

Use the property `NonCopyable` attribute to control if the copy operation copies specific property values.

Implement Selective Deep Copy

This example overrides the `copyElement` method in a subclass of `matlab.mixin.Copyable` to implement a deep copy of a specific class of `handle` objects.

Consider the following classes:

- `ContainsHandles` — subclass of `matlab.mixin.Copyable` that contains `handle` objects in two properties
- `DeepCp` — subclass of `matlab.mixin.Copyable`
- `ShallowCp` — subclass of `handle`

Here are the simplified class definitions:

```
classdef ContainsHandles < matlab.mixin.Copyable
   properties
      Prop1
      Prop2
      DeepObj     % Contains a DeepCp object
      ShallowObj  % Contains a ShallowCp object
   end
   methods
      function obj = ContainsHandles(val1,val2,deepobj,shallowobj)
         if nargin > 0
            obj.Prop1 = val1;
            obj.Prop2 = val2;
            obj.DeepObj = deepobj;
            obj.ShallowObj = shallowobj;
         end
      end
   end
   methods(Access = protected)
      % Override copyElement method:
      function cpObj = copyElement(obj)
         % Make a shallow copy of all four properties
         cpObj = copyElement@matlab.mixin.Copyable(obj);
         % Make a deep copy of the DeepCp object
         cpObj.DeepObj = copy(obj.DeepObj);
      end
   end
end
```

The `DeepCp` class derives from `matlab.mixin.Copyable`:

```
classdef DeepCp < matlab.mixin.Copyable
   properties
      DpProp
   end
   methods
      function obj = DeepCp(val)
      ...
      end
   end
end
```

The `handle` class `ShallowCp` does not derive from `matlab.mixin.Copyable` and, therefore, has no copy method:

```
classdef ShallowCp < handle
   properties
      ShProp
   end
   methods
      function obj = ShallowCp(val)
       ...
      end
   end
end
```

Create a `ContainsHandles` object, which contains the two handle objects in its `DpProp` and `ShProp` properties:

```
>> sc = ShallowCp(7);
>> dc = DeepCp(7);
>> a = ContainsHandles(4,5,dc,sc);
>> a.DeepObj
ans =

  DeepCp with properties:

    DpProp: 7
>> a.ShallowObj.ShProp
ans =

  ShallowCp with properties:

    ShProp: 7
```

Make a copy of the `ContainsHandles` object:

```
>> b = copy(a);
```

The returned copy `b` contains a shallow copy of object `sc`, and a deep copy of object `dc`. That is, the `dc` object passed to `ContainsHandles` constructor is now a new, independent objects as a result of the copy operation. You can now change the `dc` object without affecting the copy. This is not the case for the shallow copied object, `sc`:

```
% Change the property values of the handle objects:
>> sc.ShProp = 5;
>> dc.DpProp = 5;
% Note that the deep copied object is not affected:
>> b.DeepObj
```

```
ans =

  DeepCp with properties:

    DpProp: 7
% The shallow copied object is still referencing the same data:
>> b.ShallowObj

ans =

  ShallowCp with properties:

    ShProp: 5
```

Override Copy Behavior in Hierarchies

The `copyElement` method in a superclass cannot access the private data in a subclass.

If you override `copyElement` in a subclass of `matlab.mixin.Copyable`, and then use this subclass as a superclass, you need to override `copyElement` in all subclasses that contain private properties. The override of `copyElement` in subclasses should call the `copyElement` in the respective superclass, as in the previous example.

The following simplified code demonstrates this approach:

```
classdef SuperClass < matlab.mixin.Copyable
   properties(Access = private)
      super_prop
   end
   methods
        ...

      function cpObj = copyElement(obj)
            ...
         cpObj = copyElement@matlab.mixin.Copyable(obj);
            ...
      end
   end
end


classdef SubClass1 < SuperClass
   properties(Access=private)
```

```
      sub_prop1
   end
   methods
      function cpObj = copyElement(obj)
         % Copy super_prop
         cpObj = copyElement@SuperClass(obj);
         % Copy sub_prop1 in subclass
         % Assignment can introduce side effects
         cpObj.sub_prop1 = obj.sub_prop1;
      end
   end
end
```

The override of `copyElement` in `SubClass1` copies the private subclass property because the superclass cannot access private data in the subclass.

Note: The assignment of `sub_prop1` in the override of `copyElement` in `SubClass1` calls the property set method, if one exists, possibly introducing side effects to the copy operation.

Copy Behaviors for Specific Inputs

Given a call to the `matlab.mixin.Copyable` `copy` method of the form:

```
B = copy(A);
```

This call to `copy` produces the results described for each of the following conditions:

- `A` has dynamic properties — `copy` does not copy dynamic properties. You can implement dynamic-property copying in the subclass if needed.
- `A` has no non-Dependent properties — `copy` creates a new object with no property values without calling the class constructor to avoid introducing side effects.
- `A` contains deleted handles — `copy` creates deleted handles of the same class in the output array.
- `A` has attached listeners — `copy` does not copy listeners.
- `A` contains objects of enumeration classes — Enumeration classes cannot subclass `matlab.mixin.Copyable`.
- A `delete` method calls `copy` — `copy` creates a legitimate copy, obeying all the behaviors that apply in any other usage.

Note: You cannot derive an enumeration class from `matlab.mixin.Copyable` because the number of instances you can create are limited to the ones defined inside the enumeration block. See "Define Enumeration Classes" for more information about enumeration classes.

Attributes

`ConstructOnLoad`	`true`

To learn about attributes of classes, see Class Attributes in the MATLAB Object-Oriented Programming documentation.

Definitions

Deep Copy

Copy each property value and assign it to the new (copied) property. Recursively copy property values that reference handle objects to copy all of the underlying data.

Shallow Copy

Copy each property value and assign it to the new (copied) property. If a property value is a handle, copy the handle but not the underlying data.

See Also

handle

Topics

"Implement Copy for Handle Classes"

Introduced in R2011a

copy

Class: matlab.mixin.Copyable
Package: matlab.mixin

Copy array of handle objects

Syntax

```
B = copy(A)
```

Description

`B = copy(A)` copies each element in the array of handles `A` to the new array of handles `B`.

The `copy` method performs a copy according to the following rules:

- The `copy` method does not copy `Dependent` properties
- MATLAB does not call the `copy` method recursively on any handles contained in property values
- MATLAB does not call the class constructor or property set methods during the copy operation.
- `B` has the same number of elements and same size as `A`.
- `B` is the same class as `A`.
- If `A` is empty, `B` is also empty.
- If `A` is heterogeneous, `B` is also heterogeneous.
- If `A` contains deleted handle objects, copy creates deleted handles of the same class in `B`.
- Dynamic properties and listeners associated with objects in `A` are not copied to objects in `B`.
- You can call `copy` inside your class `delete` method.

Input Arguments

A

Handle object array

Default:

Output Arguments

B

Handle object array containing copies of the objects in A.

Attributes

`Sealed`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

matlab.mixin.Copyable | handle

Topics

"Implement Copy for Handle Classes"

Introduced in R2011a

copyElement

Class: matlab.mixin.Copyable
Package: matlab.mixin

Copy scalar MATLAB object

Syntax

```
b = copyElement(h)
```

Description

`b = copyElement(h)` makes a copy of the scalar handle `h` and returns a scalar handle of the same class.

The sealed `matlab.mixin.Copyable` copy method calls the protected `copyElement` method to copy each object in the array. Override `copyElement` in your subclass to control copy behavior.

Input Arguments

h — Handle to copy

Scalar handle

Handle to copy, specified as a scalar handle.

Output Arguments

b — Copy of input handle

Scalar handle

Copy of input handle, returned as a scalar handle.

Attributes

`Access`	`protected`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

copy

Topics

"Implement Copy for Handle Classes"

Introduced in R2011a

copyfile

Copy file or folder

Syntax

```
copyfile source
copyfile source destination
copyfile source destination f

status = copyfile( ___ )
[status,msg] = copyfile( ___ )
[status,msg,msgID] = copyfile( ___ )
```

Description

`copyfile source` copies the file or folder `source` to the current folder.

`copyfile source destination` copies the file or folder `source` to the file or folder `destination`. If `source` is a file, `destination` can be a file or a folder. If `source` is a folder, `destination` must also be a folder. If `source` is a folder or specifies multiple files and `destination` does not exist, `copyfile` attempts to create `destination`.

`copyfile source destination f` copies `source` to `destination`, even when `destination` is not writable. The state of the read/write attribute for `destination` does not change.

`status = copyfile( ___ )` copies the specified file or folder and returns a status of `1` if the operation is successful. Otherwise, it returns `0`. You can use this syntax with any of the input argument combinations in the previous syntaxes.

`[status,msg] = copyfile( ___ )` also returns the message text for any warning or error that occurs. You can use this syntax with any of the input argument combinations in the previous syntaxes.

`[status,msg,msgID] = copyfile( ___ )` also returns the message ID for any warning or error that occurs. You can use this syntax with any of the input argument combinations in the previous syntaxes.

Examples

Copy File to Another Folder

Copy `myfile1.m` from the current folder to the subfolder `myFolder`.

```
mkdir myFolder
copyfile myfile1.m myFolder
```

Create a Copy of File in Current Folder

Create a copy of `myfile1.m` in the current folder, assigning it the name `myfile2.m`.

```
copyfile myfile1.m myfile2.m
```

Copy Files and Folder to a New Folder

Copy files and subfolders whose names begin with `my`, from the current folder to the folder `newFolder`, where `newFolder` does not exist.

```
copyfile my* newFolder
```

Copy and Rename File to Read-Only Folder

Copy the file `myfile1.m` from the current folder to the read-only folder `restricted` and rename it to `myfile2.m`.

Create the read-only folder `restricted`.

```
mkdir restricted
fileattrib restricted -w
```

Copy and rename the file `myfile1.m`. A status of 0 shows the copy was unsuccessful, and `message` describes the issue.

```
[status,message,messageId] = copyfile('myfile1.m', 'restricted\myfile2.m')
```

```
status = logical
   0


message =
'No matching files were found.'

messageId =
```

```
'MATLAB:COPYFILE:FileDoesNotExist'
```

Copy and rename the file `myfile1.m` using the 'f' option to override. A status of 1 and an empty `message` and `messageID` confirms the copy was successful.

```
[status,message,messageId] = copyfile('myfile1.m', 'restricted\myfile2.m', 'f')
```

```
status = logical
   0


message =
'No matching files were found.'

messageId =
'MATLAB:COPYFILE:FileDoesNotExist'
```

Input Arguments

`source` — File or folder name to copy

character vector

File or folder name to copy, specified as a character vector. `source` can be an absolute or relative path. To copy multiple files or folders, use wildcards (*).

`destination` — File or folder name to which to copy

character vector

File or folder name to which to copy, specified as a character vector. `destination` can be an absolute or relative path, but cannot include wildcards.

Output Arguments

`status` — Indication of whether the attempt to copy the file or folder is successful

0 | 1

Indication of whether the attempt to copy the file or folder is successful, specified as `0` or `1`. If the attempt is successful, `status` is 1. Otherwise, `status` is 0.

Data Types: `logical`

`msg` — Error message
character vector

Error message, specified as a character vector. If an error or warning occurs, `msg` contains the message text of the error or warning. Otherwise, `msg` is empty, `''`.

`msgID` — Error message identifier
character vector

Error message identifier, specified as a character vector. If an error or warning occurs, `msgID` contains the message identifier of the error or warning. Otherwise, `msgID` is empty, `''`.

Tips

- After a successful `copyfile` operation, the timestamp for `destination` is the same as the timestamp for `source`.

See Also

See Also
`cd` | `delete` | `dir` | `mkdir` | `movefile` | `rmdir`

Topics
"Manage Files and Folders"
"Specify File Names"

Introduced before R2006a

copyobj

Copy graphics objects and their descendants

Syntax

```
new_handle = copyobj(h,p)
copyobj(___,'legacy')
```

Description

`copyobj` creates copies of graphics objects and assigns the objects to the new parent.

The new parent must be appropriate for the copied object (for example, you can copy an axes only to figure or uipanel). `copyobj` copies children as well.

`new_handle = copyobj(h,p)` copies one or more graphics objects identified by `h` and returns the handle of the new object or an array of new objects. The new graphics objects are children of the graphics objects specified by `p`.

`copyobj(___,'legacy')` copies object callback properties and object application data. This behavior is consistent with versions of `copyobj` before MATLAB release R2014b.

What is Not Copied

`copyobj` does not copy properties or objects that depend on their original context to operate properly. Objects with default context menus (such as legends and colorbars) create new context menus for the new object. Figures create new toolbars and menus for the new figure.

`copyobj` does *not* copy:

- Callback properties (except when using the `legacy` option)
- Application data associated with the object (except when using the `legacy` option)
- Context menu of legends, colorbars, or other objects that define default context menus.

- Default Figure toolbar and menus
- You cannot copy the same object more than once to the same parent in a single call to `copyobj`.

MATLAB changes the `Parent` property to the new parent and assigns the new objects a new handle.

Examples

Copy a surface to a new axes that is in a different figure.

```
h = surf(peaks);
colormap hsv
```

Create the destination figure and axes:

```
fig = figure;
ax = axes;
```

Copy the surface to the new axes and set properties that are not surface properties:

```
new_handle = copyobj(h,ax);
colormap(fig,hsv)
view(ax,3)
grid(ax,'on')
```

Note that while the surface is copied, the `colormap`, `view`, and `grid` are not copied.

Tips

`h` and `p` can be scalars or vectors. When both are vectors, they must be the same length, and the output argument, `new_handle`, is a vector of the same length. In this case, `new_handle(i)` is a copy of `h(i)` with its `Parent` property set to `p(i)`.

When `h` is a scalar and `p` is a vector, `h` is copied once to each of the parents in `p`. Each `new_handle(i)` is a copy of `h` with its `Parent` property set to `p(i)`, and `length(new_handle)` equals `length(p)`.

When `h` is a vector and `p` is a scalar, each `new_handle(i)` is a copy of `h(i)` with its `Parent` property set to `p`. The length of `new_handle` equals `length(h)`.

Note: You must copy the associated axes when copying a legend or a colorbar.

When programming a UI, do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. The act of copying the uicontrol object fires the `CreateFcn` repeatedly, which raises a series of error messages after exceeding the recursion limit.

See Also

`findobj` | `gcf` | `gca` | `gco` | `get` | `set`

Introduced before R2006a

corrcoef

Correlation coefficients

Syntax

```
R = corrcoef(A)
R = corrcoef(A,B)

[R,P] = corrcoef( ___ )
[R,P,RL,RU] = corrcoef( ___ )

___ = corrcoef( ___ ,Name,Value)
```

Description

`R = corrcoef(A)` returns the matrix of correlation coefficients for `A`, where the columns of `A` represent random variables and the rows represent observations.

`R = corrcoef(A,B)` returns coefficients between two random variables `A` and `B`.

`[R,P] = corrcoef( ___ )` returns the matrix of correlation coefficients and the matrix of p-values for testing the hypothesis that there is no relationship between the observed phenomena (null hypothesis). Use this syntax with any of the arguments from the previous syntaxes. If an off-diagonal element of `P` is smaller than the significance level (default is `0.05`), then the corresponding correlation in `R` is considered significant. This syntax is invalid if `R` contains complex elements.

`[R,P,RL,RU] = corrcoef( ___ )` includes matrices containing lower and upper bounds for a 95% confidence interval for each coefficient. This syntax is invalid if `R` contains complex elements.

`___ = corrcoef( ___ ,Name,Value)` returns any of the output arguments from the previous syntaxes with additional options specified by one or more `Name,Value` pair arguments. For example, `corrcoef(A,'alpha',0.1)` specifies a 90% confidence interval, and `corrcoef(A,'rows','complete')` omits all rows of `A` containing one or more `NaN` values.

Examples

Random Columns of Matrix

Compute the correlation coefficients for a matrix with two normally distributed, random columns and one column that is defined in terms of another. Since the third column of A is a multiple of the second, these two variables are directly correlated, thus the correlation coefficient in the (2,3) and (3,2) entries of R is 1.

```
x = randn(6,1);
y = randn(6,1);
A = [x y 2*y+3];
R = corrcoef(A)
```

```
R =

    1.0000   -0.6237   -0.6237
   -0.6237    1.0000    1.0000
   -0.6237    1.0000    1.0000
```

Two Random Variables

Compute the correlation coefficient matrix between two normally distributed, random vectors of 10 observations each.

```
A = randn(10,1);
B = randn(10,1);
R = corrcoef(A,B)
```

```
R =

    1.0000    0.4518
    0.4518    1.0000
```

P-Values of Matrix

Compute the correlation coefficients and p-values of a normally distributed, random matrix, with an added fourth column equal to the sum of the other three columns. Since the last column of A is a linear combination of the others, a correlation is introduced between the fourth variable and each of the other three variables. Therefore, the fourth

row and fourth column of P contain very small p-values, identifying them as significant correlations.

```
A = randn(50,3);
A(:,4) = sum(A,2);
[R,P] = corrcoef(A)
```

```
R =

    1.0000    0.1135    0.0879    0.7314
    0.1135    1.0000   -0.1451    0.5082
    0.0879   -0.1451    1.0000    0.5199
    0.7314    0.5082    0.5199    1.0000


P =

    1.0000    0.4325    0.5438    0.0000
    0.4325    1.0000    0.3146    0.0002
    0.5438    0.3146    1.0000    0.0001
    0.0000    0.0002    0.0001    1.0000
```

Correlation Bounds

Create a normally distributed, random matrix, with an added fourth column equal to the sum of the other three columns, and compute the correlation coefficients, p-values, and lower and upper bounds on the coeffcients.

```
A = randn(50,3);
A(:,4) = sum(A,2);
[R,P,RL,RU] = corrcoef(A)
```

```
R =

    1.0000    0.1135    0.0879    0.7314
    0.1135    1.0000   -0.1451    0.5082
    0.0879   -0.1451    1.0000    0.5199
    0.7314    0.5082    0.5199    1.0000


P =

    1.0000    0.4325    0.5438    0.0000
```

```
    0.4325    1.0000    0.3146    0.0002
    0.5438    0.3146    1.0000    0.0001
    0.0000    0.0002    0.0001    1.0000


RL =

    1.0000   -0.1702   -0.1952    0.5688
   -0.1702    1.0000   -0.4070    0.2677
   -0.1952   -0.4070    1.0000    0.2825
    0.5688    0.2677    0.2825    1.0000


RU =

    1.0000    0.3799    0.3575    0.8389
    0.3799    1.0000    0.1388    0.6890
    0.3575    0.1388    1.0000    0.6974
    0.8389    0.6890    0.6974    1.0000
```

The matrices `RL` and `RU` give lower and upper bounds, respectively, on each correlation coefficient according to a 95% confidence interval by default. You can change the confidence level by specifying the value of `alpha`, which defines the percent confidence, `100*(1-alpha)`%. For example, use `alpha` equal to 0.01 to compute a 99% confidence interval, which is reflected in the bounds `RL` and `RU`. The intervals defined by the coefficent bounds in `RL` and `RU` are bigger for 99% confidence compared to 95%, since higher confidence requires a more inclusive range of potential correlation values.

```
[R,P,RL,RU] = corrcoef(A,'alpha',0.01)
```

```
R =

    1.0000    0.1135    0.0879    0.7314
    0.1135    1.0000   -0.1451    0.5082
    0.0879   -0.1451    1.0000    0.5199
    0.7314    0.5082    0.5199    1.0000


P =

    1.0000    0.4325    0.5438    0.0000
    0.4325    1.0000    0.3146    0.0002
    0.5438    0.3146    1.0000    0.0001
    0.0000    0.0002    0.0001    1.0000
```

```
RL =

    1.0000   -0.2559   -0.2799    0.5049
   -0.2559    1.0000   -0.4792    0.1825
   -0.2799   -0.4792    1.0000    0.1979
    0.5049    0.1825    0.1979    1.0000


RU =

    1.0000    0.4540    0.4332    0.8636
    0.4540    1.0000    0.2256    0.7334
    0.4332    0.2256    1.0000    0.7407
    0.8636    0.7334    0.7407    1.0000
```

NaN Values

Create a normally distributed matrix involving NaN values, and compute the correlation coefficient matrix, excluding any rows that contain NaN.

```
A = randn(5,3);
A(1,3) = NaN;
A(3,2) = NaN;
A
```

```
A =

    0.5377   -1.3077       NaN
    1.8339   -0.4336    3.0349
   -2.2588       NaN    0.7254
    0.8622    3.5784   -0.0631
    0.3188    2.7694    0.7147
```

```
R = corrcoef(A,'rows','complete')
```

```
R =

    1.0000   -0.8506    0.8222
   -0.8506    1.0000   -0.9987
    0.8222   -0.9987    1.0000
```

Use `'all'` to include all `NaN` values in the calculation.

```
R = corrcoef(A,'rows','all')
```

```
R =

     1   NaN   NaN
   NaN   NaN   NaN
   NaN   NaN   NaN
```

Use `'pairwise'` to compute each two-column correlation coefficient on a pairwise basis. If one of the two columns contains a `NaN`, that row is omitted.

```
R = corrcoef(A,'rows','pairwise')
```

```
R =

    1.0000   -0.3388    0.4649
   -0.3388    1.0000   -0.9987
    0.4649   -0.9987    1.0000
```

Input Arguments

A — Input array

matrix

Input array, specified as a matrix.

- If `A` is a scalar, `corrcoef(A)` returns `NaN`.
- If `A` is a vector, `corrcoef(A)` returns `1`.

Data Types: `single` | `double`
Complex Number Support: Yes

B — Additional input array

vector | matrix | multidimensional array

Additional input array, specified as a vector, matrix, or multidimensional array.

- A and B must be the same size.
- If A and B are scalars, then `corrcoef(A,B)` returns 1. If A and B are equal, however, `corrcoef(A,B)` returns NaN.
- If A and B are matrices or multidimensional arrays, then `corrcoef(A,B)` converts each input into its vector representation and is equivalent to `corrcoef(A(:),B(:))` or `corrcoef([A(:) B(:)])`.
- If A and B are 0-by-0 empty arrays, `corrcoef(A,B)` returns a 2-by-2 matrix of NaN values.

Data Types: `single` | `double`
Complex Number Support: Yes

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `R = corrcoef(A,'alpha',0.03)`

`'alpha'` — Significance level

0.05 (default) | number between 0 and 1

Significance level, specified as a number between 0 and 1. `alpha` defines the percent confidence level, 100*(1-`alpha`)%, for the correlation coefficients, which determines the bounds in RL and RU.

Data Types: `single` | `double`

`'rows'` — Use of NaN option

`'all'` (default) | `'complete'` | `'pairwise'`

Use of NaN option, specified as one of these values:

- `'all'` — Include all NaN values in the input before computing the correlation coefficients.
- `'complete'` — Omit any rows of the input containing NaN values before computing the correlation coefficients. This option always returns a positive definite matrix.

- `'pairwise'` — Omit any rows containing `NaN` only on a pairwise basis for each two-column correlation coefficient calculation. This option can return a matrix that is not positive definite.

Data Types: `char`

Output Arguments

`R` — Correlation coefficients

matrix

Correlation coefficients, returned as a matrix.

- For one matrix input, `R` has size `[size(A,2) size(A,2)]` based on the number of random variables (columns) represented by `A`. The diagonal entries are set to one by convention, while the off-diagonal entries are correlation coefficients of variable pairs. The values of the coefficients can range from -1 to 1, with -1 representing a direct, negative correlation, 0 representing no correlation, and 1 representing a direct, positive correlation. `R` is symmetric.
- For two input arguments, `R` is a 2-by-2 matrix with ones along the diagonal and the correlation coefficients along the off-diagonal.
- If any random variable is constant, its correlation with all other variables is undefined, and the respective row and column value is `NaN`.

`P` — P-values

matrix

P-values, returned as a matrix. `P` is symmetric and is the same size as `R`. The diagonal entries are all ones and the off-diagonal entries are the p-values for each variable pair. P-values range from 0 to 1, where values close to 0 correspond to a significant correlation in `R` and a low probability of observing the null hypothesis.

`RL` — Lower bound for correlation coefficient

matrix

Lower bound for correlation coefficient, returned as a matrix. `RL` is symmetric and is the same size as `R`. The diagonal entries are all ones and the off-diagonal entries are the 95% confidence interval lower bound for the corresponding coefficient in `R`. The syntax returning `RL` is invalid if `R` contains complex values.

RU — Upper bound for correlation coefficient
matrix

Upper bound for correlation coefficient, returned as a matrix. RU is symmetric and is the same size as R. The diagonal entries are all ones and the off-diagonal entries are the 95% confidence interval upper bound for the corresponding coefficient in R. The syntax returning RL is invalid if R contains complex values.

Definitions

Correlation Coefficient

The correlation coefficient of two random variables is a measure of their linear dependence. If each variable has N scalar observations, then the Pearson correlation coefficient is defined as

$$\rho(A,B) = \frac{1}{N-1}\sum_{i=1}^{N}\left(\overline{\frac{A_i - \mu_A}{\sigma_A}}\right)\left(\frac{B_i - \mu_B}{\sigma_B}\right),$$

where μ_A and σ_A are the mean and standard deviation of A, respectively, and μ_B and σ_B are the mean and standard deviation of B. Alternatively, you can define the correlation coefficient in terms of the covariance of A and B:

$$\rho(A,B) = \frac{\mathrm{cov}(A,B)}{\sigma_A \sigma_B}.$$

The correlation coefficient *matrix* of two random variables is the matrix of correlation coefficients for each pairwise variable combination,

$$R = \begin{pmatrix} \rho(A,A) & \rho(A,B) \\ \rho(B,A) & \rho(B,B) \end{pmatrix}.$$

Since A and B are always directly correlated to themselves, the diagonal entries are just 1, that is,

$$R = \begin{pmatrix} 1 & \rho(A,B) \\ \rho(B,A) & 1 \end{pmatrix}.$$

References

[1] Fisher, R.A. *Statistical Methods for Research Workers*, 13th Ed., Hafner, 1958.

[2] Kendall, M.G. *The Advanced Theory of Statistics*, 4th Ed., Macmillan, 1979.

[3] Press, W.H., Teukolsky, S.A., Vetterling, W.T., and Flannery, B.P. *Numerical Recipes in C*, 2nd Ed., Cambridge University Press, 1992.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Row-vector input is only supported when the first two inputs are vectors and nonscalar.

See Also

See Also

`cov` | `mean` | `plotmatrix` | `std`

Introduced before R2006a

cos

Cosine of argument in radians

Syntax

```
Y = cos(X)
```

Description

`Y = cos(X)` returns the cosine for each element of `X`. The `cos` function operates element-wise on arrays. The function accepts both real and complex inputs. For purely real values or imaginary values of `X`, `cos` returns real values in the interval [-1 ,1]. For complex values of `X`, `cos` returns complex values. All angles are in radians.

Examples

Plot Cosine Function

Plot the cosine function over the domain $-\pi \le x \le \pi$.

```
x = -pi:0.01:pi;
plot(x,cos(x))
grid on
```

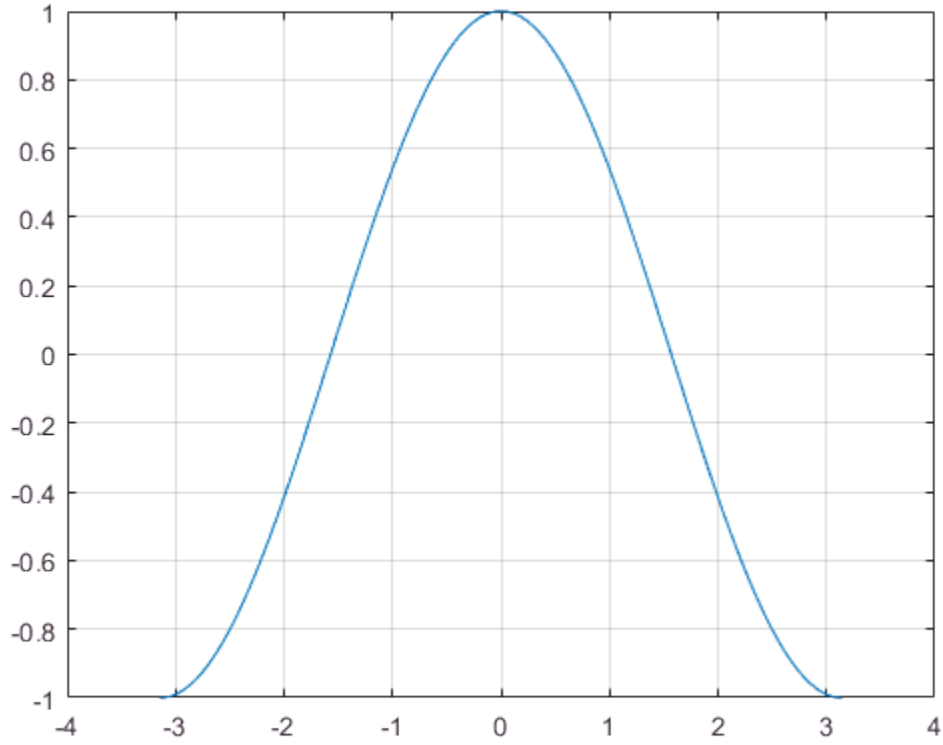

Cosine of Vector of Complex Angles

Calculate the cosine of the complex angles in vector `x`.

```
x = [-i pi+i*pi/2 -1+i*4];
y = cos(x)
```

```
y =
   1.5431 + 0.0000i  -2.5092 - 0.0000i  14.7547 +22.9637i
```

Input Arguments

X — Input angle in radians

scalar | vector | matrix | multidimensional array

Input angle in radians, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Cosine of input angle

scalar | vector | matrix | multidimensional array

Cosine of input angle, returned as a real-valued or complex-valued scalar, vector, matrix or multidimensional array.

Definitions

Cosine Function

The cosine of an angle, α, defined with reference to a right angled triangle is

$$\cos(\alpha) = \frac{\text{adjacent side}}{\text{hypotenuse}} = \frac{b}{h}.$$

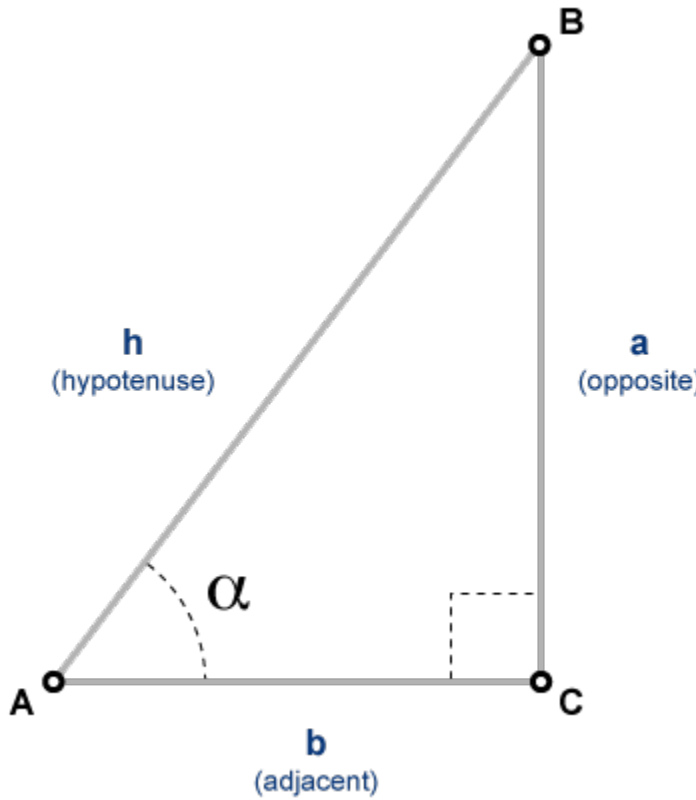

The cosine of a complex angle, α, is

$$\cos(\alpha) = \frac{e^{i\alpha} + e^{-i\alpha}}{2}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`acos` | `acosd` | `cosd` | `cosh`

Introduced before R2006a

cosd

Cosine of argument in degrees

Syntax

```
Y = cosd(X)
```

Description

`Y = cosd(X)` returns the cosine of the elements of `X`, which are expressed in degrees.

Examples

Cosine of 90 degrees compared to cosine of π/2 radians

```
cosd(90)
```

```
ans = 0
```

```
cos(pi/2)
```

```
ans = 6.1232e-17
```

Cosine of complex angles specified in degrees

Create an array of three complex angles and compute the cosine.

```
z = [180+i 45+2i 10+3i];
y = cosd(z)
```

```
y =
  -1.0002 + 0.0000i   0.7075 - 0.0247i   0.9862 - 0.0091i
```

Input Arguments

X — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `cosd` operation is element-wise when `X` is nonscalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Cosine of angle

scalar value | vector | matrix | N-D array

Cosine of angle, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

acos | acosd | cos

Introduced before R2006a

cosh

Hyperbolic cosine

Syntax

```
Y = cosh(X)
```

Description

The `cosh` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

`Y = cosh(X)` returns the hyperbolic cosine for each element of `X`.

Examples

Graph of Hyperbolic Cosine

Graph the hyperbolic cosine function over the domain $-5 \le x \le 5$.

```
x = -5:0.01:5;
plot(x,cosh(x)), grid on
```

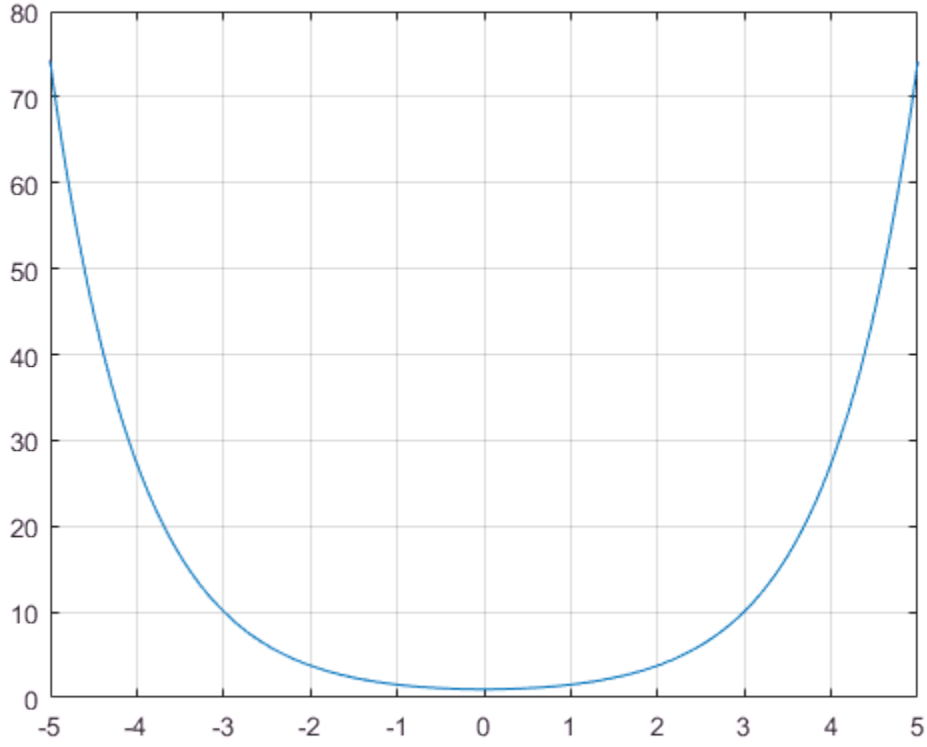

Definitions

Hyperbolic Cosine

The hyperbolic cosine of z is

$$\cosh(z) = \frac{e^{z} + e^{-z}}{2}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`acosh` | `cos` | `sinh` | `tanh`

Introduced before R2006a

cot

Cotangent of angle in radians

Syntax

```
Y = cot(X)
```

Description

`Y = cot(X)` returns the cotangent of elements of `X`. The `cot` function operates element-wise on arrays. The function accepts both real and complex inputs. For real values of `X` in the interval [-Inf,Inf], `cot` returns real values in the interval [-Inf,Inf].. For complex values of `X`, `cot` returns complex values. All angles are in radians.

Examples

Plot Cotangent Function

Plot the cotangent function over the domain $-\pi < x < 0$ and $0 < x < \pi$.

```
x1 = -pi+0.01:0.01:-0.01;
x2 = 0.01:0.01:pi-0.01;
plot(x1,cot(x1),x2,cot(x2)), grid on
```

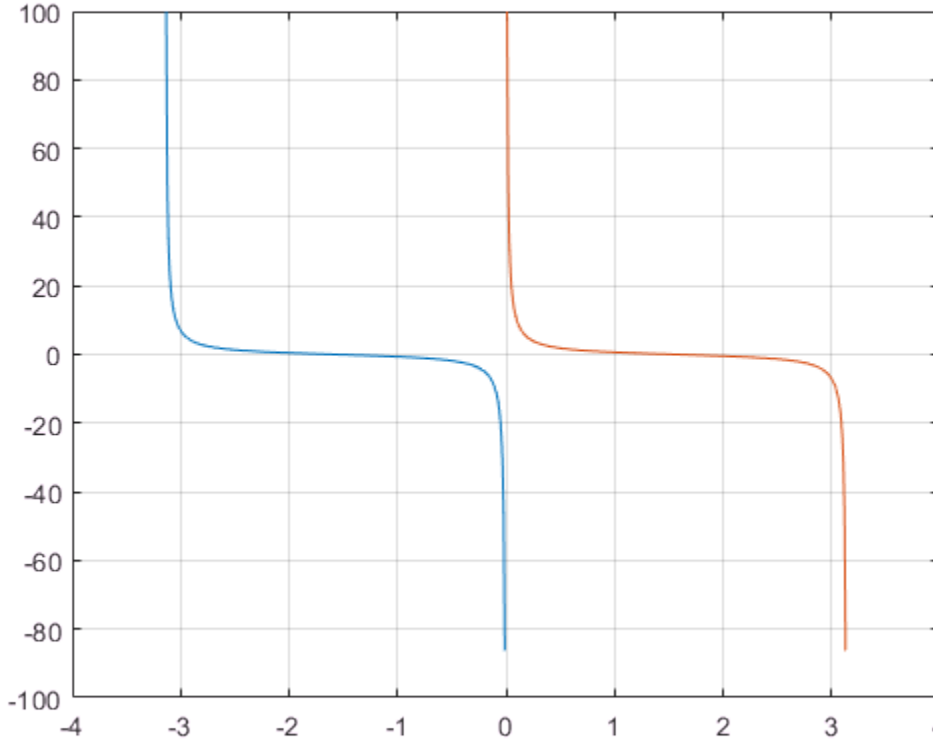

Cotangent of Vector of Complex Angles

Calculate the cotangent of the complex angles in vector `x`.

```
x = [-i pi+i*pi/2 -1+i*4];
y = cot(x)
```

```
y =
   0.0000 + 1.3130i  -0.0000 - 1.0903i  -0.0006 - 0.9997i
```

Input Arguments

X — Input angle in radians

scalar | vector | matrix | multidimensional array

Input angle in radians, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Cotangent of input angle

scalar | vector | matrix | multidimensional array

Cotangent of input angle, returned as a real-valued or complex-valued scalar, vector, matrix or multidimensional array.

Definitions

Cotangent Function

The cotangent of an angle, α, defined with reference to a right angled triangle is

$$\cot(\alpha) = \frac{1}{\tan(\alpha)} = \frac{\text{adjacent side}}{\text{opposite side}} = \frac{b}{a}.$$

.

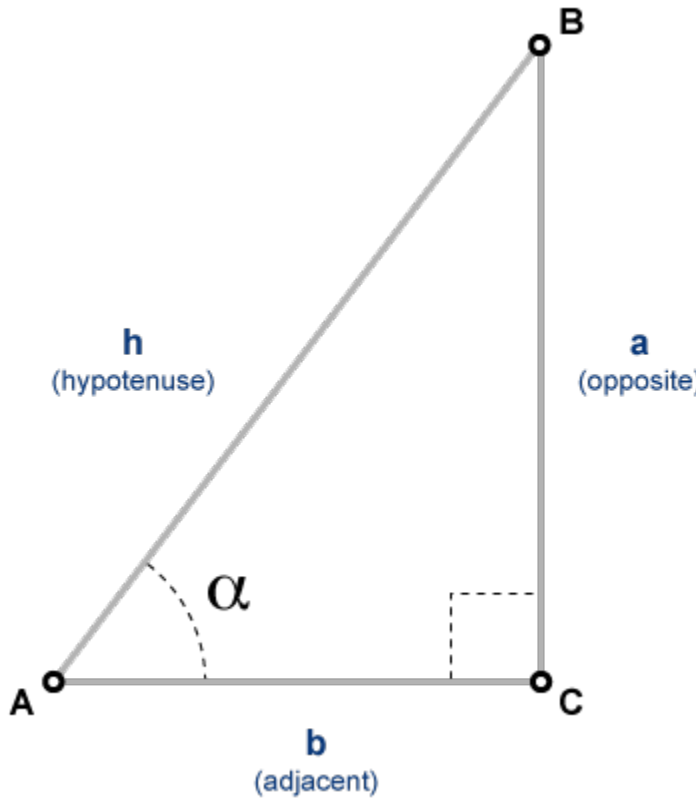

The cotangent of a complex angle α is

$$\cot(\alpha) = \frac{i\left(e^{i\alpha} + e^{-i\alpha}\right)}{\left(e^{i\alpha} - e^{-i\alpha}\right)}.$$

.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`acot` | `acotd` | `acoth` | `cotd` | `coth`

Introduced before R2006a

cotd

Cotangent of argument in degrees

Syntax

```
Y = cotd(X)
```

Description

`Y = cotd(X)` returns the cotangent of the elements of `X`, which are expressed in degrees.

Examples

Cotangent of angles approaching 90 and 180 degrees

Create a vector of input angles consisting of 90° and the next smaller and larger double precision numbers. Then compute the cotangent.

```
x1 = [90-eps(90) 90 90+eps(90)];
y1 = cotd(x1)
```

```
y1 =

   1.0e-15 *

    0.2480         0   -0.2480
```

`cotd` returns zero when the input angle is exactly 90°. Evaluation at the next smaller double-precision angle returns a slightly positive result. Likewise, the cotangent is slightly negative when the input angle is the next double-precision number larger than 90.

The behavior is similar for input angles near 180°.

```
x2 = [180-eps(180) 180 180+eps(180)];
y2 = cotd(x2)
```

```
y2 =

   1.0e+15 *

   -2.0159      -Inf    2.0159
```

Cotangent of complex angle, specified in degrees

```
x = 35+5i;
y = cotd(x)
```

```
y =
   1.3958 - 0.2606i
```

Input Arguments

X — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `cotd` operation is element-wise when `X` is nonscalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Cotangent of angle

scalar value | vector | matrix | N-D array

Cotangent of angle, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- In some cases, generated code returns `-Inf` when MATLAB returns `Inf`.
- In some cases, generated code returns `Inf` when MATLAB returns `-Inf`.

See Also

See Also

`acot` | `acotd` | `cot`

Introduced before R2006a

coth

Hyperbolic cotangent

Syntax

```
Y = coth(X)
```

Description

The `coth` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

`Y = coth(X)` returns the hyperbolic cotangent for each element of `X`.

Examples

Graph of Hyperbolic Cotangent

Plot the hyperbolic cotangent over the domain $-\pi < x < 0$ and $0 < x < \pi$.

```
x1 = -pi+0.01:0.01:-0.01;
x2 = 0.01:0.01:pi-0.01;
plot(x1,coth(x1),x2,coth(x2))
grid on
```

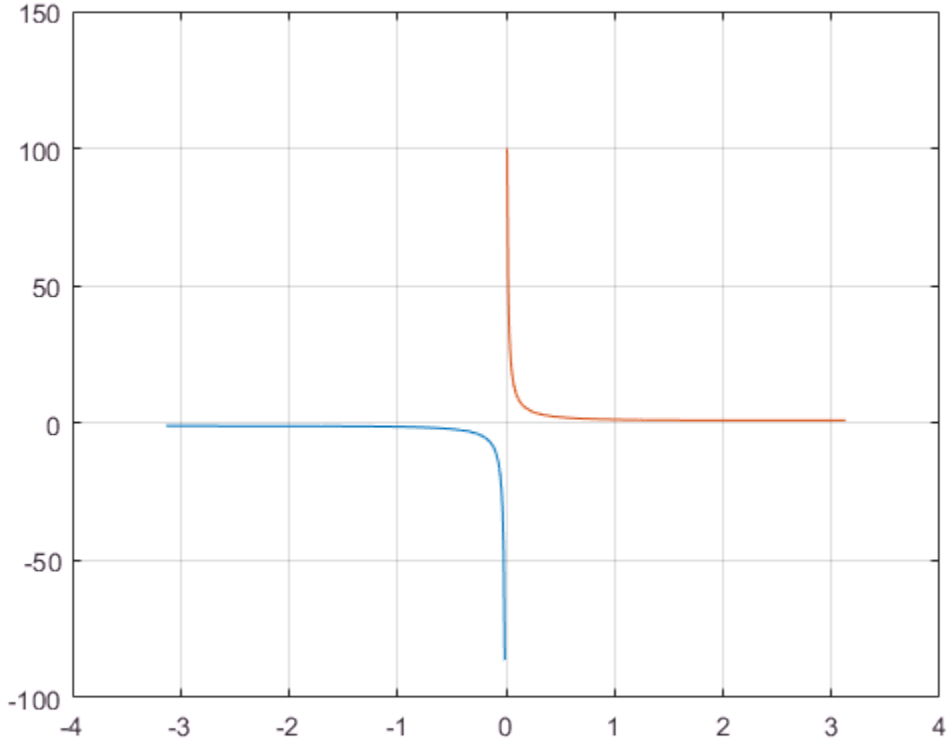

Definitions

Hyperbolic Cotangent

The hyperbolic cotangent of z is

$$\coth(z) = \frac{1}{\tanh(z)}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`acoth` | `cot` | `sinh` | `cosh` | `tanh`

Introduced before R2006a

count

Count occurrences of pattern in string

Syntax

```
A = count(str,pattern)
A = count(str,pattern,'IgnoreCase',true)
```

Description

`A = count(str,pattern)` returns the number of occurrences of `pattern` in each element of `str`. The size of `A` is the same as the size of `str`.

If `pattern` is an array containing multiple patterns, then `count` returns the total number of occurrences of all elements of `pattern` in `str`.

`A = count(str,pattern,'IgnoreCase',true)` ignores case when counting the number of occurrences of `pattern`.

Examples

Count Occurrences of Pattern in String Array

Count the number of occurrences of the word `red` in the string array.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["red green red red blue blue green";
       "green red blue green green blue"]
```

```
str = 2×1 string array
    "red green red red blue blue green"
    "green red blue green green blue"
```

```
A = count(str,"red")
```

```
A =

     3
     1
```

Count Occurrences of Multiple Patterns in String

Count the sum of occurrences of `red` and `blue` in the string array.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["red green blue";
       "green red blue green blue"]
```

```
str = 2×1 string array
    "red green blue"
    "green red blue green blue"
```

`count` returns 2 for the first string because `red` and `blue` each occur once. `count` returns 3 for the second string because `red` occurs once and `blue` occurs twice.

```
A = count(str,["red","blue"])
```

```
A =

     2
     3
```

Ignore Case When Counting Patterns in String

Count the number of occurrences of the letter `E` in a string array that contains names, ignoring case.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Edgar Allan Poe";"Louisa May Alcott"]
```

```
str = 2×1 string array
```

```
    "Edgar Allan Poe"
    "Louisa May Alcott"
```

```
A = count(str,'E','IgnoreCase',true)
```

```
A =

     2
     0
```

Count Pattern in Character Vector

Count the number of times `al` occurs in the word `alphabetical`.

```
chr = 'alphabetical'
```

```
chr =
'alphabetical'
```

```
A = count(chr,'al')
```

```
A = 2
```

- "Create String Arrays"
- "Search and Replace Text"
- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text
string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`pattern` — Search pattern
string array | character vector | cell array of character vectors

Search pattern, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`contains` | `endsWith` | `endsWith` | `find` | `numel` | `startsWith` | `strlength`

Topics

“Create String Arrays”
“Search and Replace Text”
“Test for Empty Strings and Missing Values”

Introduced in R2016b

countcats

Count occurrences of categorical array elements by category

Syntax

```
B = countcats(A)
B = countcats(A,dim)
```

Description

`B = countcats(A)` returns the number of elements in each category of the categorical array, `A`.

- If `A` is a vector, then `countcats` returns the number of elements in each category.
- If `A` is a matrix, then `countcats` treats the columns of `A` as vectors and returns the category counts for each column of `A`.
- If `A` is a multidimensional array, then `countcats` acts along the first array dimension whose size does not equal `1`.

`B = countcats(A,dim)` returns the category counts along dimension `dim`.

For example, you can return the category counts of each row in a categorical array using `countcats(A,2)`.

Examples

Category Counts of Categorical Vector

Create a 1-by-5 categorical vector.

```
A = categorical({'plane' 'car' 'train' 'car' 'plane'})
```

```
A = 1×5 categorical array
```

```
     plane      car      train      car      plane
```

A has three categories, car, plane, and train.

Find the number of elements in each category of A.

```
B = countcats(A)
```

```
B =

     2     2     1
```

The first element in B corresponds to the first category of A, which is car. The second element in B corresponds to the second category of A, which is plane. The third element of B corresponds to the third category of A, which is train.

Since A is a row vector, countcats returns a row vector.

Category Counts of Each Column in Array

Create a 3-by-2 categorical array, A, from a numeric array.

```
valueset = 1:3;
catnames = {'red' 'green' 'blue'};

A = categorical([1 3; 2 1; 3 1],valueset,catnames)
```

```
A = 3×2 categorical array
     red        blue
     green      red
     blue       red
```

A has three categories, red, green, and blue.

Find the category counts of each column in A.

```
B = countcats(A)
```

```
B =
```

```
     1     2
     1     0
     1     1
```

The first row of B corresponds to the first category of A. The value, red, occurs once in the first column of A and twice in the second column.

The second row of B corresponds to the second category of A. The value, green, occurs once in the first column of A, and it does not occur in the second column.

The third row of B corresponds to the third category of A. The value, blue, occurs once in the first column of A and once in the second column.

Category Counts of Each Row in Array

Create a 3-by-2 categorical array, A, from a numeric array.

```
valueset = 1:3;
catnames = {'red' 'green' 'blue'};

A = categorical([1 3; 2 1; 3 1],valueset,catnames)
```

```
A = 3×2 categorical array
     red        blue
     green      red
     blue       red
```

A has three categories, red, green, and blue.

Find the category counts of A along the second dimension.

```
B = countcats(A,2)
```

```
B =

     1     0     1
     1     1     0
     1     0     1
```

The first column of B corresponds to the first category of A. The value, red, occurs once in the first row of A, once in the second row, and once in the third row.

The second column of B corresponds to the second category of A. The value, green, occurs in only one element. It occurs in the second row of A.

The third column of B corresponds to the third category of A. The value, blue, occurs once in the first row of A and once in the third row.

Category Counts of Array Containing Undefined Elements

Create a 6-by-1 categorical array, A, from a numeric array.

```
valueset = 1:3;
catnames = {'red' 'green' 'blue'};

A = categorical([1;3;2;1;3;1],valueset,catnames)
```

```
A = 6×1 categorical array
     red
     blue
     green
     red
     blue
     red
```

Remove the blue category.

```
A = removecats(A,'blue')
```

```
A = 6×1 categorical array
     red
     <undefined>
     green
     red
     <undefined>
     red
```

A has two categories, red and green. Elements of A that were from the blue category are now undefined.

Find the number of elements in each category of A.

```
B = countcats(A)
```

```
B =

     3
     1
```

The first element in B corresponds to the first category of A. The value, `red`, occurs three times in A.

The second element in B corresponds to the second category of A. The value, `green`, occurs once in A.

`countcats` does not return any information on undefined elements.

Use the `summary` function to view the number of undefined elements in addition to the number of elements in each category of A.

```
summary(A)
```

```
     red              3
     green            1
     <undefined>      2
```

Input Arguments

A — Categorical array

vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional categorical array, A.

If `dim = 1`, then `countcats(A,1)` returns the category counts for each column of `A`.

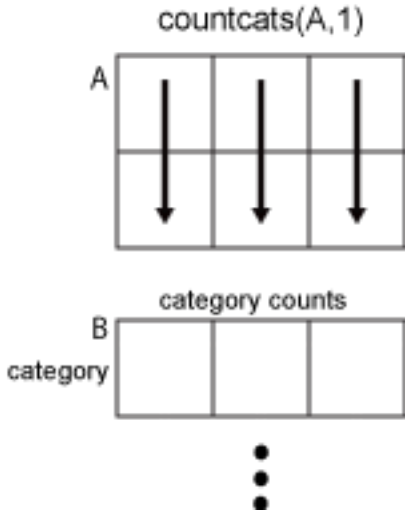

If `dim = 2`, then `countcats(A,2)` returns the category counts of each row of `A`.

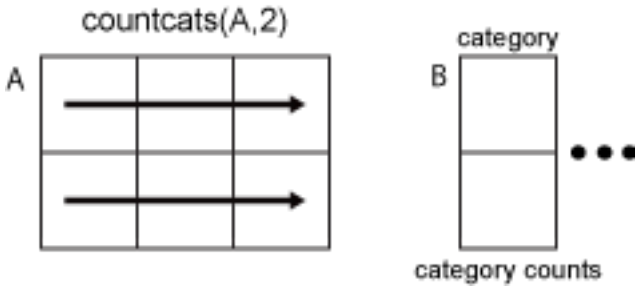

If `dim` is greater than `ndims(A)`, then `countcats(A)` returns an array the same size as `A` for each category. `countcats` returns `1` for elements in the corresponding category and `0` otherwise.

Tips

- To find the number of undefined elements in a categorical array, `A`, you must use `summary` or `isundefined`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`categories` | `iscategory` | `ismember` | `isundefined` | `summary`

Introduced in R2013b

cov

Covariance

Syntax

```
C = cov(A)
C = cov(A,B)
C = cov(___,w)
C = cov(___,nanflag)
```

Description

`C = cov(A)` returns the covariance.

- If `A` is a vector of observations, `C` is the scalar-valued variance.
- If `A` is a matrix whose columns represent random variables and whose rows represent observations, `C` is the covariance matrix with the corresponding column variances along the diagonal.
- `C` is normalized by the number of observations `-1`. If there is only one observation, it is normalized by 1.
- If `A` is a scalar, `cov(A)` returns `0`. If `A` is an empty array, `cov(A)` returns `NaN`.

`C = cov(A,B)` returns the covariance between two random variables `A` and `B`.

- If `A` and `B` are vectors of observations with equal length, `cov(A,B)` is the `2`-by-`2` covariance matrix.
- If `A` and `B` are matrices of observations, `cov(A,B)` treats `A` and `B` as vectors and is equivalent to `cov(A(:),B(:))`. `A` and `B` must have equal size.
- If `A` and `B` are scalars, `cov(A,B)` returns a `2`-by-`2` block of zeros. If `A` and `B` are empty arrays, `cov(A,B)` returns a `2`-by-`2` block of `NaN`.

`C = cov(___,w)` specifies the normalization weight for any of the previous syntaxes. When `w = 0` (default), `C` is normalized by the number of observations `-1`. When `w = 1`, it is normalized by the number of observations.

`C = cov( ___ ,nanflag)` specifies a condition for omitting `NaN` values from the calculation for any of the previous syntaxes. For example, `cov(A,'omitrows')` will omit any rows of `A` with one or more `NaN` elements.

Examples

Covariance of Matrix

Create a 3-by-4 matrix and compute its covariance.

```
A = [5 0 3 7; 1 -5 7 3; 4 9 8 10];
C = cov(A)
```

```
C =

    4.3333    8.8333   -3.0000    5.6667
    8.8333   50.3333    6.5000   24.1667
   -3.0000    6.5000    7.0000    1.0000
    5.6667   24.1667    1.0000   12.3333
```

Since the number of columns of `A` is 4, the result is a 4-by-4 matrix.

Covariance of Two Vectors

Create two vectors and compute their 2-by-2 covariance matrix.

```
A = [3 6 4];
B = [7 12 -9];
cov(A,B)
```

```
ans =

    2.3333    6.8333
    6.8333  120.3333
```

Covariance of Two Matrices

Create two matrices of the same size and compute their 2-by-2 covariance.

```
A = [2 0 -9; 3 4 1];
B = [5 2 6; -4 4 9];
cov(A,B)
```

```
ans =

   22.1667   -6.9333
   -6.9333   19.4667
```

Specify Normalization Weight

Create a matrix and compute the covariance normalized by the number of rows.

```
A = [1 3 -7; 3 9 2; -5 4 6];
C = cov(A,1)
```

```
C =

   11.5556    5.1111  -10.2222
    5.1111    6.8889    5.2222
  -10.2222    5.2222   29.5556
```

Covariance Excluding NaN

Create a matrix and compute its covariance, excluding any rows containing NaN values.

```
A = [1.77 -0.005 3.98; NaN -2.95 NaN; 2.54 0.19 1.01]
```

```
A =

    1.7700   -0.0050    3.9800
       NaN   -2.9500       NaN
    2.5400    0.1900    1.0100
```

```
C = cov(A,'omitrows')
```

```
C =

    0.2964    0.0751   -1.1435
    0.0751    0.0190   -0.2896
   -1.1435   -0.2896    4.4105
```

Input Arguments

A — Input array

vector | matrix

Input array, specified as a vector or matrix.

Data Types: `single` | `double`

B — Additional input array

vector | matrix

Additional input matrix, specified as a vector or matrix. `B` must be the same size as `A`.

Data Types: `single` | `double`

w — Normalization weight

0 (default) | 1

Normalization weight, specified as one of these values:

- `0` — The output is normalized by the number of observations `-1`. If there is only one observation, it is normalized by 1.
- `1` — The output is normalized by the number of observations.

Data Types: `single` | `double`

nanflag — NaN condition

`'includenan'` (default) | `'omitrows'` | `'partialrows'`

`NaN` condition, specified as one of these values:

- `'includenan'` — include all `NaN` values in the input prior to computing the covariance.
- `'omitrows'` — omit any row of input containing one or more `NaN` values prior to computing the covariance.
- `'partialrows'` — omit rows containing `NaN` only on a pairwise basis for each two-column covariance calculation.

Data Types: `char`

Output Arguments

`C` — Covariance
scalar | matrix

Covariance, specified as a scalar or matrix.

- For single matrix input, `C` has size `[size(A,2) size(A,2)]` based on the number of random variables (columns) represented by `A`. The variances of the columns are along the diagonal. If `A` is a row or column vector, `C` is the scalar-valued variance.
- For two-vector or two-matrix input, `C` is the `2`-by-`2` covariance matrix between the two random variables. The variances are along the diagonal of `C`.

Definitions

Covariance

For two random variable vectors A and B, the covariance is defined as

$$\mathrm{cov}(A,B) = \frac{1}{N-1}\sum_{i=1}^{N}(A_i - \mu_A)^*(B_i - \mu_B)$$

where μ_A is the mean of A, μ_B is the mean of B, and `*` denotes the complex conjugate.

The *covariance matrix* of two random variables is the matrix of pairwise covariance calculations between each variable,

$$C = \begin{pmatrix} \mathrm{cov}(A,A) & \mathrm{cov}(A,B) \\ \mathrm{cov}(B,A) & \mathrm{cov}(B,B) \end{pmatrix}.$$

For a matrix `A` whose columns are each a random variable made up of observations, the covariance matrix is the pairwise covariance calculation between each column combination. In other words, $C(i,j) = \mathrm{cov}\left(A(:,i), A(:,j)\right)$.

Variance

For a random variable vector A made up of N scalar observations, the variance is defined as

$$V = \frac{1}{N-1}\sum_{i=1}^{N}|A_i - \mu|^2$$

where μ is the mean of A,

$$\mu = \frac{1}{N}\sum_{i=1}^{N}A_i.$$

Some definitions of variance use a normalization factor of N instead of N-1, which can be specified by setting `w` to `1`. In either case, the mean is assumed to have the usual normalization factor N.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- For the syntax `C = cov(X,Y)`, the inputs `X` and `Y` must have the same size, even if they are vectors.
- The option `'partialrows'` is not supported.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If the input is variable-size and is `[]` at run time, returns `[]` not `NaN`.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`corrcoef` | `mean` | `median` | `std` | `var` | `xcorr` | `xcov`

Introduced before R2006a

cplxpair

Sort complex numbers into complex conjugate pairs

Syntax

```
B = cplxpair(A)
B = cplxpair(A,tol)
B = cplxpair(A,[],dim)
B = cplxpair(A,tol,dim)
```

Description

`B = cplxpair(A)` sorts the elements along different dimensions of a complex array, grouping together complex conjugate pairs.

The conjugate pairs are ordered by increasing real part. Within a pair, the element with negative imaginary part comes first. The purely real values are returned following all the complex pairs. The complex conjugate pairs are forced to be exact complex conjugates. A default tolerance of `100*eps` relative to `abs(A(i))` determines which numbers are real and which elements are paired complex conjugates.

If `A` is a vector, `cplxpair(A)` returns `A` with complex conjugate pairs grouped together.

If `A` is a matrix, `cplxpair(A)` returns `A` with its columns sorted and complex conjugates paired.

If `A` is a multidimensional array, `cplxpair(A)` treats the values along the first non-singleton dimension as vectors, returning an array of sorted elements.

`B = cplxpair(A,tol)` overrides the default tolerance.

`B = cplxpair(A,[],dim)` sorts `A` along the dimension specified by scalar dim.

`B = cplxpair(A,tol,dim)` sorts `A` along the specified dimension and overrides the default tolerance.

Diagnostics

If there are an odd number of complex numbers, or if the complex numbers cannot be grouped into complex conjugate pairs within the tolerance, `cplxpair` generates the error message

```
Complex numbers can't be paired.
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Introduced before R2006a

cputime

Elapsed CPU time

Syntax

```
cputime
```

Description

`cputime` returns the total CPU time (in seconds) used by your MATLAB application from the time it was started. This number can overflow the internal representation and wrap around.

Examples

The following code returns the CPU time used to run `surf(peaks(40))`.

```
t = cputime;
surf(peaks(40));
e = cputime-t

e =
     0.4667
```

Tips

To measure performance, it is recommended that you use the `timeit` or `tic` and `toc` functions. For more information, see Using tic and toc Versus the cputime Function.

See Also

`clock` | `etime` | `tic` | `timeit` | `toc`

Introduced before R2006a

RandStream.create

Create random number streams

Class

`RandStream`

Syntax

```
[s1,s2,...] = RandStream.create('gentype','NumStreams',n)
s = RandStream.create('gentype')
[ ... ] = RandStream.create('gentype', Name, Value,...)
```

Description

`[s1,s2,...] = RandStream.create('gentype','NumStreams',n)` creates `n` random number streams that use the uniform pseudorandom number generator algorithm specified by `gentype`. The streams are independent in a pseudorandom sense. The streams are not necessarily independent from streams created at other times. `RandStream.list` returns all possible values for `gentype` or see "Choosing a Random Number Generator" for details on generator algorithms.

Note: Multiple streams are not supported by all generator types. Use either the multiplicative lagged Fibonacci generator (`mlfg6331_64`) or the combined multiple recursive generator (`mrg32k3a`) to create multiple streams.

`s = RandStream.create('gentype')` creates a single random stream. The `RandStream` constructor is a more concise alternative when you need to create a single stream.

`[ ... ] = RandStream.create('gentype', Name, Value,...)` allows you to specify optional Name, Value pairs to control creation of the stream. The parameters are:

`NumStreams`	Total number of streams of this type that will be created across sessions or labs. Default is 1.
`StreamIndices`	Stream indices that should be created in this call. Default is `1:N`, where `N` is the value given with the `'NumStreams'` parameter.
`Seed`	Nonnegative scalar integer with which to initialize all streams. Default is 0. Seeds must be an integer between 0 and $2^{32} - 1$ or `'shuffle'` to create a seed based on the current time.
`NormalTransform`	Transformation algorithm used by `randn(S, ...)` to generate normal pseudorandom values. Options are `'Ziggurat'`, `'Polar'`, or `'Inversion'`.
`CellOutput`	Logical flag indicating whether or not to return the stream objects as elements of a cell array. Default is false.

Typically, you call `RandStream.create` once to create multiple independent streams in a single pass. Alternatively, you can create each stream from separate calls to `RandStream.create`, but you must specify the appropriate values for `gentype`, `'NumStreams'`, `'Seed'`, and `'StreamIndices'` to ensure their independence:

- Specify the same set of values for `gentype`, `'NumStreams'`, and `'Seed'` in each case.
- Specify a different value for `'StreamIndices'` that is between `1` and the `'NumStreams'` value in each case.

Examples

Create three independent streams.

```
[s1,s2,s3] = RandStream.create('mrg32k3a','NumStreams',3);
r1 = rand(s1,100000,1);
r2 = rand(s2,100000,1);
r3 = rand(s3,100000,1);
```

```
corrcoef([r1,r2,r3])
```

Create one stream from a set of three independent streams and designate it as the global stream.

```
s2 = RandStream.create('mrg32k3a','NumStreams',3,'StreamIndices',2);
RandStream.setGlobalStream(s2);
```

See Also

RandStream | RandStream.list

createClassFromWsdl

Create MATLAB class based on WSDL document

Compatibility

`createClassFromWsdl` will be removed in a future release. Use `matlab.wsdl.createWSDLClient` instead.

Syntax

```
createClassFromWsdl(source)
```

Description

`createClassFromWsdl(source)` creates a MATLAB class based on the service name defined in `source`.

`createClassFromWsdl` creates a class folder, `@servicename`, in the current folder. The class folder contains:

- A method file for each Web service operation.
- A display method, `display.m`.
- A constructor, `servicename.m`.

Examples

Display Standardized Test Scores

This example illustrates how to use the function. It does not use an actual WSDL document; therefore, you cannot run it. Retrieve information from a database that provides standardized test scores. Assume the WSDL document is located at `http://examplestandardtests.com/scoreswebservice?WSDL`.

Create the MATLAB class, `@TestScoreWebService`, in the current folder.

```
createClassFromWsdl('http://examplestandardtests.com/scoreswebservice?WSDL')
```

```
Retrieving document at 'http://examplestandardtests.com/scoreswebservice?WSDL'
```

Create the service.

```
svc = TestScoreWebService
```

```
endpoint: 'http://examplestandardtests.com/scoreswebservice'
    wsdl: 'http://examplestandardtests.com/scoreswebservice?WSDL'
```

Display the class methods.

```
dir @TestScoreWebService
```

```
display.m
StudentNames.m
Tests.m
TestScoreWebService.m
```

Display the calling syntax for the `StudentNames` function.

```
help StudentNames
```

```
 StudentNames(obj)

    Get names of students who took tests

      Output:
        Names = (string)
```

Get the names. MATLAB creates a structure with the names of the test takers.

```
students = StudentNames(svc)
```

```
students =

    StudentInfo: [125x1 struct]
```

View the data for the first student.

```
students.StudentInfo(1)
```

```
StudentNameLast: 'Benjamin'
StudentNameFirst: 'Ali'
```

- “Specify Proxy Server Settings for Connecting to the Internet”

Input Arguments

`source` — Web Services Description Language (WSDL) document
string

Web Services Description Language (WSDL) document, specified as a string. The name must include the location of the document, using one of the following:

- URL
- Full path
- Relative path

Example: `'http://examplestandardtests.com/scoreswebservice?WSDL'`

See Also

See Also
`createSoapMessage` | `matlab.wsdl.createWSDLClient` | `xmlread`

Topics
"Specify Proxy Server Settings for Connecting to the Internet"

Introduced before R2006a

createSoapMessage

Create SOAP (Simple Object Access Protocol) message to send to server

Compatibility

`createSoapMessage` will be removed in a future release. Use `matlab.wsdl.createWSDLClient` instead.

Syntax

```
message = createSoapMessage(namespace,method,values,names,types)
message = createSoapMessage(namespace,method,values,names,types,
style)
```

Description

`message = createSoapMessage(namespace,method,values,names,types)` creates a SOAP `message`.

`message = createSoapMessage(namespace,method,values,names,types, style)` creates `message` with specified `style`.

Examples

Retrieve Book Information from Library Database

This example assumes the library is on a local intranet and does not use an actual endpoint; therefore, you cannot run it.

Retrieve the name of the author of a book titled “In the Fall.” The relative path of the library service is `urn:LibraryCatalog`. To get the author's name, use the `getAuthor` function, which takes the book name as the input value. The `getAuthor` parameter is `nameToLookUp`. The XML data type for title is `{http://www.w3.org/2001/XMLSchema}string`. The SOAP message style is `rpc` by default.

Create the SOAP message.

```
message = createSoapMessage(...
  'urn:LibraryCatalog',...
  'getAuthor',...
  {'In the Fall'},...
  {'nameToLookUp'},...
  {'{http://www.w3.org/2001/XMLSchema}string'})
```

```
message =

[#document: null]
```

This response does not necessarily indicate that the message is valid, although certain input problems produce error messages.

Send the message to the server for processing, and get the author's name back. The server endpoint is `http://test/soap/services/LibraryCatalog`. The server method is `urn:LibraryCatalog#getAuthor`.

```
response = callSoapService(...
  'http://test/soap/services/LibraryCatalog',...
  'urn:LibraryCatalog#getAuthor',...
  message)
```

```
<?xml version="1.0" encoding="utf-8"?>
<soapenv:Envelope
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
<soapenv:Body>
<getAuthorResponse xmlns="urn:LibraryCatalog">
<ns1:getAuthorReturn xmlns:ns1="http://latestversion.soap.test">
Kate Alvin
</ns1:getAuthorReturn>
</getAuthorResponse>
</soapenv:Body>
</soapenv:Envelope>
```

MATLAB returns the message in a single line, displayed here on separate lines for legibility.

Extract the author's name.

```
author = parseSoapResponse(response)
```

```
author = Kate Alvin
```

MATLAB automatically converted the XML string data type to `char`.

Input Arguments

`namespace` — Location of Web service

string

Location of Web service, specified as a string in the form of a valid Uniform Resource Identifier (URI).

Example: `'urn:LibraryCatalog'`

`method` — Name of Web service operation

string

Name of Web service operation, specified as a string.

Example: `'getAuthor'`

`values` — Input arguments for `method`

cell array

Input arguments for `method`, specified as a cell array.

Example: `{'In the Fall'}`

`names` — Parameter for `method`

cell array

Parameter for `method`, specified as a cell array.

Example: `{'nameToLookUp'}`

`types` — XML data types for `values`

cell array

XML data types for `values`, specified as a cell array.

Example: `{'{http://www.w3.org/2001/XMLSchema}string'}`

`style` — Style for structuring SOAP message

`'rpc'` (default) | `'document'`

Style for structuring the SOAP message, specified as one of these values. Use a style supported by the service specified in `namespace`.

`'rpc'`	Remote Procedure Call (RPC) encoding
`'document'`	Document-style encoding

Output Arguments

`message` — Java document object model (DOM)

string

Java document object model (DOM), returned as a string. Use `message` as input to `callSoapService` function.

See Also

See Also

`callSoapService` | `matlab.wsdl.createWSDLClient` | `parseSoapResponse` | `urlread` | `xmlread`

Introduced before R2006a

cross

Cross product

Syntax

```
C = cross(A,B)
C = cross(A,B,dim)
```

Description

`C = cross(A,B)` returns the cross product of `A` and `B`.

- If `A` and `B` are vectors, then they must have a length of 3.
- If `A` and `B` are matrices or multidimensional arrays, then they must have the same size. In this case, the `cross` function treats `A` and `B` as collections of three-element vectors. The function calculates the cross product of corresponding vectors along the first array dimension whose size equals 3.

`C = cross(A,B,dim)` evaluates the cross product of arrays `A` and `B` along dimension, `dim`. `A` and `B` must have the same size, and both `size(A,dim)` and `size(B,dim)` must be 3. The `dim` input is a positive integer scalar.

Examples

Cross Product of Vectors

Create two 3-D vectors.

```
A = [4 -2 1];
B = [1 -1 3];
```

Find the cross product of `A` and `B`. The result, `C`, is a vector that is perpendicular to both `A` and `B`.

```
C = cross(A,B)
```

```
C =
```

```
    -5   -11    -2
```

Use dot products to verify that C is perpendicular to A and B.

```
dot(C,A)==0 & dot(C,B)==0
```

```
ans = logical
   1
```

The result is logical 1 (true).

Cross Product of Matrices

Create two matrices containing random integers.

```
A = randi(15,3,5)
```

```
A =

    13    14     5    15    15
    14    10     9     3     8
     2     2    15    15    13
```

```
B = randi(25,3,5)
```

```
B =

     4    20     1    17    10
    11    24    22    19    17
    23    17    24    19     5
```

Find the cross product of A and B.

```
C = cross(A,B)
```

```
C =

   300   122  -114  -228  -181
  -291  -198  -105   -30    55
    87   136   101   234   175
```

The result, C, contains five independent cross products between the columns of A and B. For example, C(:,1) is equal to the cross product of A(:,1) with B(:,1).

Cross Product of Multidimensional Arrays

Create two 3-by-3-by-3 multidimensional arrays of random integers.

```
A = randi(10,3,3,3);
B = randi(25,3,3,3);
```

Find the cross product of A and B, treating the rows as vectors.

```
C = cross(A,B,2)
```

```
C =

(:,:,1) =

   -34    12    62
    15    72  -109
   -49     8     9


(:,:,2) =

   198  -164  -170
    45     0   -18
   -55   190  -116


(:,:,3) =

  -109   -45   131
     1   -74    82
    -6   101  -121
```

The result is a collection of row vectors. For example, C(1,:,1) is equal to the cross product of A(1,:,1) with B(1,:,1).

Find the cross product of A and B along the third dimension (dim = 3).

```
D = cross(A,B,3)
```

```
D =
```

```
(:,:,1) =

   -14   179  -106
   -56    -4   -75
     2   -37    10


(:,:,2) =

   -37  -162   -37
    50  -124   -78
     1    63   118


(:,:,3) =

    62  -170    56
    46    72   105
    -2   -53  -160
```

The result is a collection of vectors oriented in the third dimension. For example, `D(1,1,:)` is equal to the cross product of `A(1,1,:)` with `B(1,1,:)`.

Input Arguments

`A,B` — Input arrays
numeric arrays

Input arrays, specified as numeric arrays.

Data Types: `single` | `double`
Complex Number Support: Yes

`dim` — Dimension to operate along
positive integer scalar

Dimension to operate along, specified as a positive integer scalar. The size of dimension `dim` must be 3. If no value is specified, the default is the first array dimension whose size equals 3.

Consider two 2-D input arrays, A and B:

- `cross(A,B,1)` treats the columns of A and B as vectors and returns the cross products of corresponding columns.
- `cross(A,B,2)` treats the rows of A and B as vectors and returns the cross products of corresponding rows.

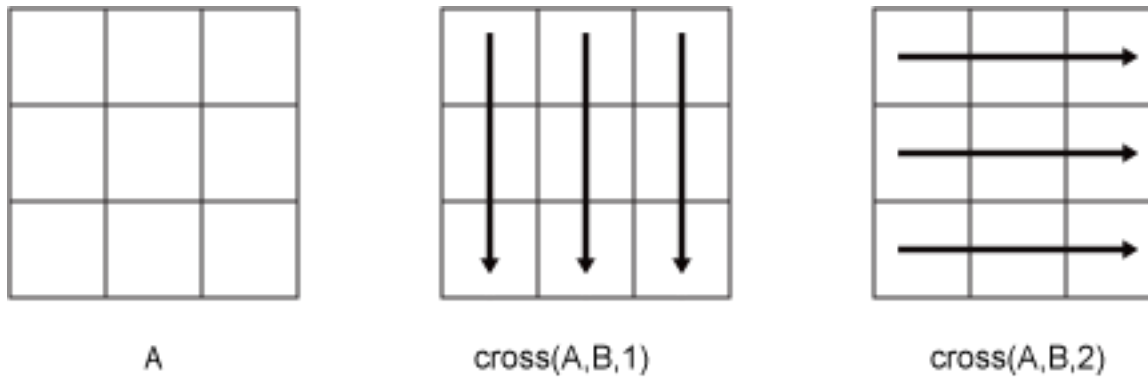

`cross` returns an error if `dim` is greater than `ndims(A)`.

Definitions

Cross Product

The cross product between two 3-D vectors produces a new vector that is perpendicular to both.

Consider the two vectors

$$A = a_1\hat{i} + a_2\hat{j} + a_3\hat{k} \ ,$$
$$B = b_1\hat{i} + b_2\hat{j} + b_3\hat{k} \ .$$

In terms of a matrix determinant involving the basis vectors $\hat{i}$, $\hat{j}$, and $\hat{k}$, the cross product of A and B is

$$C = A \times B = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ a_1 & a_2 & a_3 \\ b_1 & b_2 & b_3 \end{vmatrix}$$

$$= (a_2 b_3 - a_3 b_2)\hat{i} + (a_3 b_1 - a_1 b_3)\hat{j} + (a_1 b_2 - a_2 b_1)\hat{k} \ .$$

Geometrically, $A \times B$ is perpendicular to both A and B. The magnitude of the cross product, $\|A \times B\|$, is equal to the area of the parallelogram formed using A and B as sides. This area is related to the magnitudes of A and B as well as the angle between the vectors by

$$\|A \times B\| = \|A\| \|B\| \sin\alpha \ .$$

Thus, if A and B are parallel, then the cross product is zero.

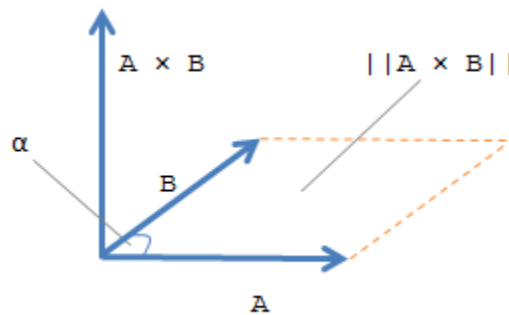

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If supplied, `dim` must be a constant.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`dot` | `kron`

Introduced before R2006a

csc

Cosecant of input angle in radians

Syntax

```
Y = csc(X)
```

Description

`Y = csc(X)` returns the cosecant of the elements of `X`. The `csc` function operates element-wise on arrays. The function accepts both real and complex inputs. For real values of `X` in the interval [-Inf, Inf], `csc` returns real values in the interval [-Inf ,-1] and [1,Inf]. For complex values of `X`, `csc` returns complex values. All angles are in radians.

Examples

Plot Cosecant Function

Plot the cosecant function over the domain $-\pi < x < 0$ and $0 < x < \pi$ as shown.

```
x1 = -pi+0.01:0.01:-0.01;
x2 = 0.01:0.01:pi-0.01;
plot(x1,csc(x1),x2,csc(x2)), grid on
```

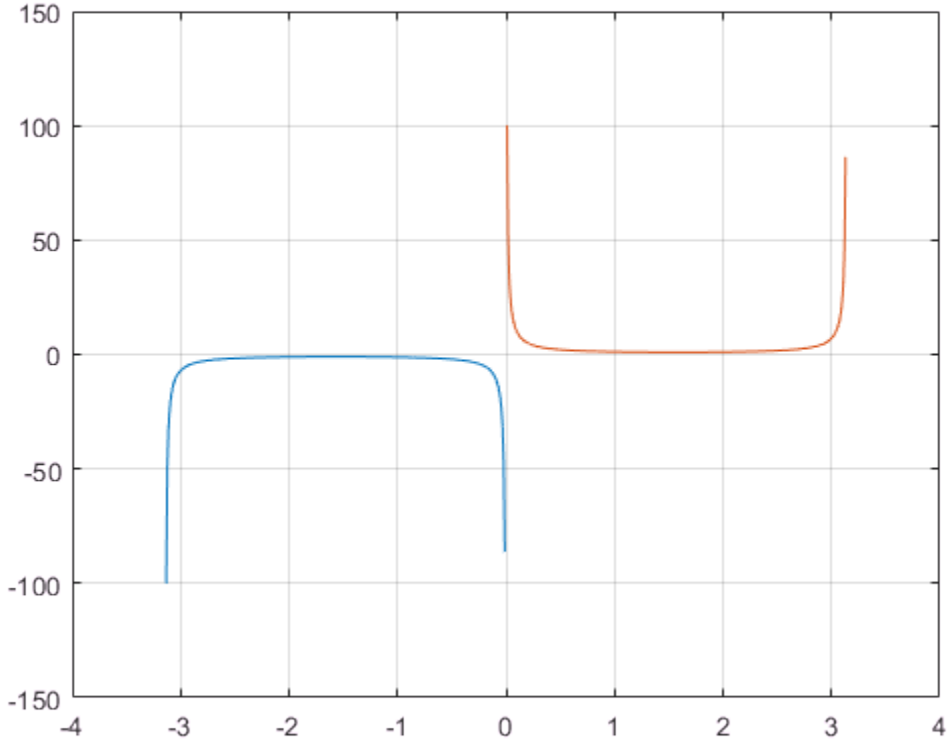

Cosecant of Vector of Complex Angles

Calculate the cosecant of the complex angles in vector `x`.

```
x = [-i pi+i*pi/2 -1+i*4];
y = csc(x)
```

```
y =
   0.0000 + 0.8509i   0.0000 + 0.4345i  -0.0308 - 0.0198i
```

Input Arguments

X — Input angle in radians

scalar | vector | matrix | multidimensional array

Input angle in radians, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Cosecant of input angle

scalar | vector | matrix | multidimensional array

Cosecant of input angle, returned as a real-valued or complex-valued scalar, vector, matrix or multidimensional array.

Definitions

Cosecant Function

The cosecant of an angle, α, defined with reference to a right angled triangle is

$$\csc(\alpha) = \frac{1}{\sin(\alpha)} = \frac{\text{hypotenuse}}{\text{opposite side}} = \frac{h}{a}.$$

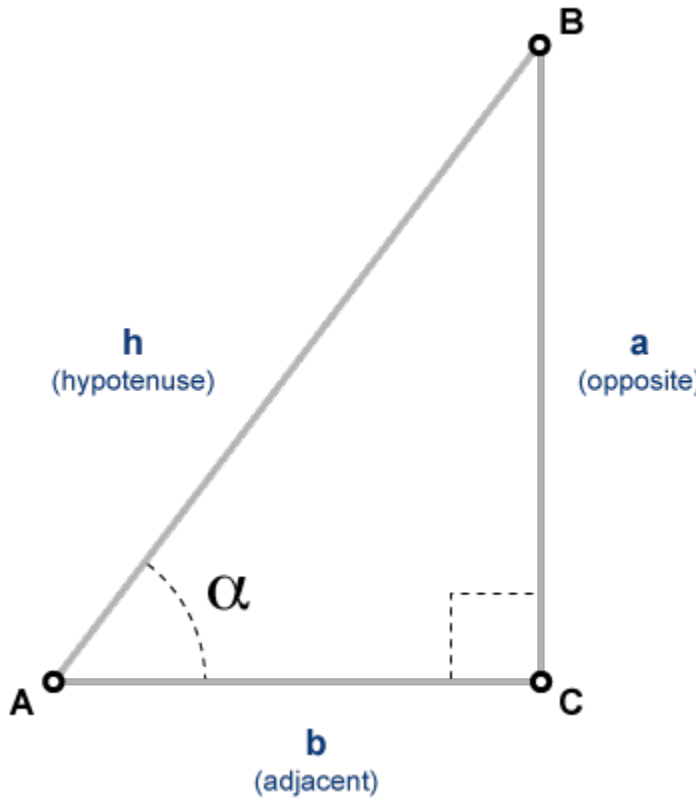

The cosecant of a complex angle, α, is

$$\csc(\alpha) = \frac{2i}{e^{i\alpha} - e^{-i\alpha}}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`acsc` | `acscd` | `acsch` | `cscd` | `csch`

Introduced before R2006a

cscd

Cosecant of argument in degrees

Syntax

```
Y = cscd(X)
```

Description

`Y = cscd(X)` returns the cosecant of the elements of `X`, which are expressed in degrees.

Examples

Cosecant of 180 degrees compared to cosecant of π radians

`cscd(180)` is infinite, whereas `csc(pi)` is large but finite.

```
cscd(180)
```

```
ans = Inf
```

```
csc(pi)
```

```
ans = 8.1656e+15
```

Cosecant of vector of complex angles, specified in degrees

```
z = [35+i 15+2i 10+3i];
y = cscd(z)
```

```
y =
   1.7421 - 0.0434i   3.7970 - 0.4944i   5.2857 - 1.5681i
```

Input Arguments

X — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `cscd` operation is element-wise when `X` is nonscalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Cosecant of angle

scalar value | vector | matrix | N-D array

Cosecant of angle, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- In some cases, generated code returns `-Inf` when MATLAB returns `Inf`.

- In some cases, generated code returns `Inf` when MATLAB returns `-Inf`.

See Also

See Also

`acsc` | `acscd` | `csc`

Introduced before R2006a

csch

Hyperbolic cosecant

Syntax

```
Y = csch(x)
```

Description

The `csch` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

`Y = csch(x)` returns the hyperbolic cosecant for each element of `x`.

Examples

Graph of Hyperbolic Cosecant

Plot the hyperbolic cosecant over the domain $-\pi < x < 0$ and $0 < x < \pi$.

```
x1 = -pi+0.01:0.01:-0.01;
x2 = 0.01:0.01:pi-0.01;
plot(x1,csch(x1),x2,csch(x2)), grid on
```

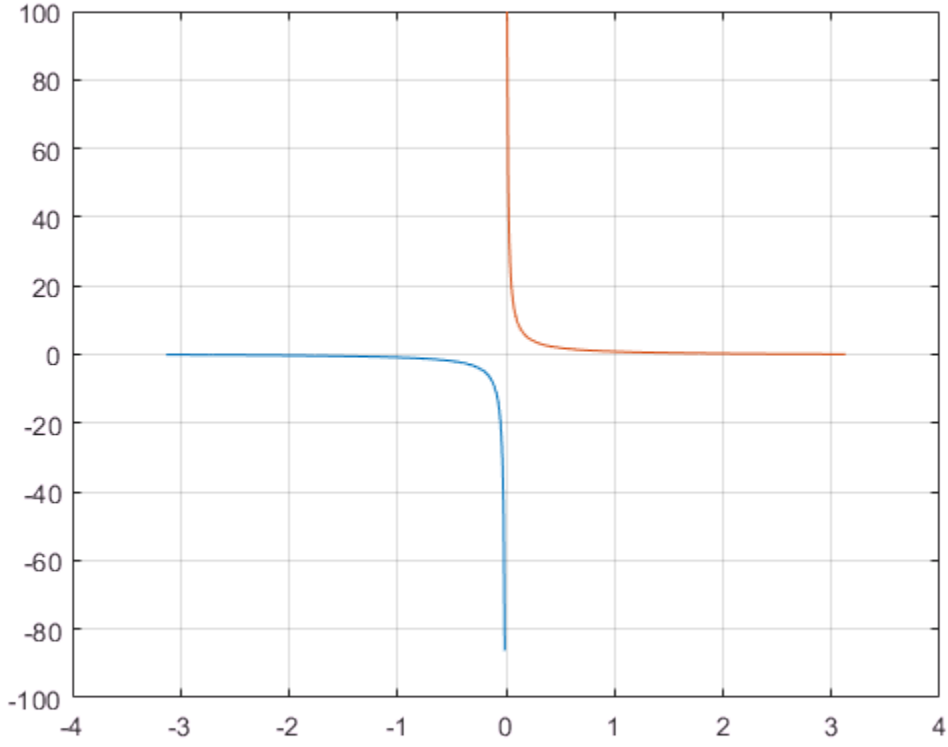

Definitions

Hyperbolic Cosecant

The hyperbolic cosecant of z is

$$\operatorname{csch}(z) = \frac{1}{\sinh(z)}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`acsch` | `csc` | `sinh` | `cosh`

Introduced before R2006a

csvread

Read comma-separated value (CSV) file

Syntax

```
M = csvread(filename)
M = csvread(filename,R1,C1)
M = csvread(filename,R1,C1,[R1 C1 R2 C2])
```

Description

`M = csvread(filename)` reads a comma-separated value (CSV) formatted file into array `M`. The file must contain only numeric values.

`M = csvread(filename,R1,C1)` reads data from the file starting at row offset `R1` and column offset `C1`. For example, the offsets `R1=0`, `C1=0` specify the first value in the file.

`M = csvread(filename,R1,C1,[R1 C1 R2 C2])` reads only the range bounded by row offsets `R1` and `R2` and column offsets `C1` and `C2`. Another way to define the range is to use spreadsheet notation, such as `'A1..B7'` instead of `[0 0 6 1]`.

Examples

Read Entire CSV File

Create a file named `csvlist.dat` that contains comma-separated values.

```
02, 04, 06, 08
03, 06, 09, 12
05, 10, 15, 20
07, 14, 21, 28
```

Read the numeric values in the file.

```
filename = 'csvlist.dat';
M = csvread(filename)
```

```
M =

     2     4     6     8
     3     6     9    12
     5    10    15    20
     7    14    21    28
```

Read CSV File Starting at Specific Row and Column Offset

Read the matrix starting two rows below the first row from the file described in the previous example.

```
M = csvread('csvlist.dat',2,0)
```

```
M =

     5    10    15    20
     7    14    21    28
```

Read Specific Range from CSV File

Read the matrix bounded by row offsets 1 and 2 and column offsets 0 and 2 from the file described in the first example.

```
M = csvread('csvlist.dat',1,0,[1,0,2,2])
```

```
M =

     3     6     9
     5    10    15
```

Input Arguments

`filename` — File name
character vector | string

File name, specified as a character vector or string.

Example: `'myFile.dat'` or `"myFile.dat"`

Data Types: `char` | `string`

`R1` — Starting row offset
0 (default) | nonnegative integer

Starting row offset, specified as a nonnegative integer. The first row has an offset of 0.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`C1` — Starting column offset
0 (default) | nonnegative integer

Starting column offset, specified as a nonnegative integer. The first column has an offset of 0.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`R2` — Ending row offset
nonnegative integer

Ending row offset, specified as a nonnegative integer. The first row has an offset of 0.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`C2` — Ending column offset
nonnegative integer

Ending column offset, specified as a nonnegative integer. The first column has an offset of 0.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Tips

- Skip header rows or columns by specifying row and column offsets. All values in the file other than headers must be numeric.

Algorithms

`csvread` fills empty delimited fields with zero. When the `csvread` function reads data files with lines that end with a nonspace delimiter, such as a semicolon, it returns a matrix, `M`, that has an additional last column of zeros.

`csvread` imports any complex number as a whole into a complex numeric field, converting the real and imaginary parts to the specified numeric type. The table shows valid forms for a complex number.

Form	Example
±<real>±<imag>i|j	5.7-3.1i
±<imag>i|j	-7j

Embedded white space in a complex number is invalid and is regarded as a field delimiter.

See Also

See Also

`csvwrite` | `dlmread` | `readtable` | `textscan` | `uiimport`

Topics

"Ways to Import Text Files"

Introduced before R2006a

ctranspose, '

Complex conjugate transpose

Syntax

```
B = A'
B = ctranspose(A)
```

Description

`B = A'` computes the complex conjugate transpose of `A`.

`B = ctranspose(A)` is an alternate way to execute `A'`, but is rarely used. It enables operator overloading for classes.

Examples

Conjugate Transpose of Real Matrix

Create a 4-by-2 matrix.

```
A = [2 1; 9 7; 2 8; 3 5]
```

```
A =

     2     1
     9     7
     2     8
     3     5
```

Find the conjugate transpose of `A`.

```
B = A'
```

```
B =
```

```
     2     9     2     3
     1     7     8     5
```

The result is a 2-by-4 matrix. B has the same elements as A, but the row and column index for each element are interchanged. When no complex elements are present, A' produces the same result as A.'.

Conjugate Transpose of Complex Matrix

Create a 2-by-2 matrix with complex elements.

```
A = [0-1i 2+1i;4+2i 0-2i]
```

```
A =
   0.0000 - 1.0000i   2.0000 + 1.0000i
   4.0000 + 2.0000i   0.0000 - 2.0000i
```

Find the conjugate transpose of A.

```
B = A'
```

```
B =
   0.0000 + 1.0000i   4.0000 - 2.0000i
   2.0000 - 1.0000i   0.0000 + 2.0000i
```

The result, B, contains the elements of A with the row and column indices interchanged. The sign of the imaginary part of each number is also switched.

Input Arguments

A — Input array
vector | matrix

Input array, specified as a vector or matrix.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `cell` | `categorical` | `datetime` | `duration` | `calendarDuration`

Complex Number Support: Yes

Definitions

Complex Conjugate Transpose

The complex conjugate transpose of a matrix interchanges the row and column index for each element, reflecting the elements across the main diagonal. The operation also negates the imaginary part of any complex numbers.

For example, if `B = A'` and `A(1,2)` is `1+1i`, then the element `B(2,1)` is `1-1i`.

Tips

- The nonconjugate transpose operator, `A.'`, performs a transpose without conjugation. That is, it does not change the sign of the imaginary parts of the elements.
- For logical or non-numeric inputs, `ctranspose` and `transpose` produce the same result.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`conj` | `permute` | `transpose`

Topics

"Array vs. Matrix Operations"

"Operator Precedence"
"MATLAB Operators and Special Characters"

Introduced before R2006a

csvwrite

Write comma-separated value file

Syntax

```
csvwrite(filename,M)
csvwrite(filename,M,row,col)
```

Description

`csvwrite(filename,M)` writes matrix `M` into `filename` as comma-separated values. Specify `filename` as a character vector or string, for example, `'csvlist.dat'` or `"csvlist.dat"`.

`csvwrite(filename,M,row,col)` writes matrix `M` into `filename` starting at the specified row and column offset. The row and column arguments are zero based, so that `row=0` and `C=0` specify the first value in the file.

Examples

The following example creates a comma-separated value file from the matrix `m`.

```
m = [3 6 9 12 15; 5 10 15 20 25; ...
     7 14 21 28 35; 11 22 33 44 55];

csvwrite('csvlist.dat',m)
type csvlist.dat

3,6,9,12,15
5,10,15,20,25
7,14,21,28,35
11,22,33,44,55
```

The next example writes the matrix to the file, starting at a column offset of `2`.

```
csvwrite('csvlist.dat',m,0,2)
type csvlist.dat
```

```
,,3,6,9,12,15
,,5,10,15,20,25
,,7,14,21,28,35
,,11,22,33,44,55
```

Tips

- `csvwrite` terminates each line with a line feed character and no carriage return.
- `csvwrite` writes a maximum of five significant digits. If you need greater precision, use `dlmwrite` with a precision argument.
- `csvwrite` does not accept cell arrays for the input matrix `M`. To export a cell array that contains only numeric data, use `cell2mat` to convert the cell array to a numeric matrix before calling `csvwrite`. To export cell arrays with mixed alphabetic and numeric data, where each cell contains a single element, you can create an Excel spreadsheet (if your system has Excel installed) using `xlswrite`. For all other cases, you must use low-level export functions to write your data. For more information, see "Export Cell Array to Text File" in the MATLAB Data Import and Export documentation.

See Also

`csvread` | `dlmwrite` | `xlswrite` | `writetable` | `uiimport`

Introduced before R2006a

cummax

Cumulative maximum

Syntax

```
M = cummax(A)
M = cummax(A,dim)
M = cummax( ___ ,direction)
M = cummax( ___ ,nanflag)
```

Description

`M = cummax(A)` returns the cumulative maximum elements of `A`. By default, `cummax(A)` operates along the first array dimension whose size does not equal 1.

- If `A` is a vector, then `cummax(A)` returns a vector of the same size containing the cumulative maxima of `A`.
- If `A` is a matrix, then `cummax(A)` returns a matrix of the same size containing the cumulative maxima in each column of `A`.
- If `A` is a multidimensional array, then `cummax(A)` returns an array of the same size containing the cumulative maxima along the first array dimension of `A` whose size does not equal 1.

`M = cummax(A,dim)` returns the cumulative maxima along the dimension `dim`. For example, if `A` is a matrix, then `cummax(A,2)` returns the cumulative maxima along the rows of `A`.

`M = cummax( ___ ,direction)` optionally specifies the direction using any of the previous syntaxes. You must specify `A` and, optionally, can specify `dim`. For instance, `cummax(A,2,'reverse')` returns the cumulative maxima of `A` by working from end to beginning of the second dimension of `A`.

`M = cummax( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `cummax(A,'includenan')` includes all `NaN` values in the calculation while `cummax(A,'omitnan')` ignores them.

Examples

Cumulative Maximum Values in Vector

Find the cumulative maxima of a 1-by-10 vector of random integers.

```
v = randi(10,1,10)
```

```
v =

     9    10     2    10     7     1     3     6    10    10
```

```
M = cummax(v)
```

```
M =

     9    10    10    10    10    10    10    10    10    10
```

Cumulative Maximum Values in Matrix Columns

Find the cumulative maxima of the columns of a 3-by-3 matrix.

```
A = [3 5 2; 1 6 3; 7 8 1]
```

```
A =

     3     5     2
     1     6     3
     7     8     1
```

```
M = cummax(A)
```

```
M =

     3     5     2
     3     6     3
     7     8     3
```

Cumulative Maximum Values in Matrix Rows

Find the cumulative maxima of the rows of a 3-by-3 matrix.

```
A = [3 5 2; 1 6 3; 7 8 1]
```

```
A =

     3     5     2
     1     6     3
     7     8     1
```

```
M = cummax(A,2)
```

```
M =

     3     5     5
     1     6     6
     7     8     8
```

Cumulative Maximum Array Values in Reverse Direction

Calculate the cumulative maxima in the third dimension of a 2-by-2-by-3 array. Specify `direction` as `'reverse'` to work from the end of the third dimension to the beginning.

```
A = cat(3,[1 2; 3 4],[9 10; 11 12],[5 6; 7 8])
```

```
A =

(:,:,1) =

     1     2
     3     4


(:,:,2) =

     9    10
    11    12


(:,:,3) =

     5     6
     7     8
```

```
M = cummax(A,3,'reverse')
```

```
M =

(:,:,1) =

     9    10
    11    12


(:,:,2) =

     9    10
    11    12


(:,:,3) =

     5     6
     7     8
```

Vector with NaN Values

Create a vector containing NaN values and compute the cumulative maxima. By default, cummax ignores NaN values.

```
A = [3 5 NaN 9 0 NaN];
M = cummax(A)
```

```
M =

     3     5     5     9     9     9
```

If you include NaN values in the calculation, then the cumulative maximum becomes NaN as soon as the first NaN value in A is encountered.

```
M = cummax(A,'includenan')
```

```
M =

     3     5   NaN   NaN   NaN   NaN
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array. For complex elements, `cummax` compares the magnitude of the elements. If magnitudes are equal, `cummax` also compares the phase angles.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `duration`
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional input array, `A`:

- `cummax(A,1)` works on successive elements in the columns of `A` and returns an array of the same size as `A` with the cumulative maxima in each column.



- `cummax(A,2)` works on successive elements in the rows of `A` and returns an array of the same size as `A` with the cumulative maxima in each row.



cummax(A,2)

`cummax` returns `A` if `dim` is greater than `ndims(A)`.

`direction` — Direction of cumulation
`'forward'` (default) | `'reverse'`

Direction of cumulation, specified as `'forward'` (default) or `'reverse'`.

- `'forward'` works from `1` to `end` of the active dimension.
- `'reverse'` works from `end` to `1` of the active dimension.

Data Types: `char`

`nanflag` — `NaN` condition
`'omitnan'` (default) | `'includenan'`

`NaN` condition, specified as one of the following values:

- `'omitnan'` — Ignore all `NaN` values in the input. If the input has consecutive leading `NaN` values, then `cummax` returns `NaN` in the corresponding elements of the output. For example, `cummax([NaN 7 13 6],'omitnan')` returns the row vector `[NaN 7 13 13]`.
- `'includenan'` — Include `NaN` values from the input when computing the cumulative maxima, resulting in `NaN` values in the output.

Data Types: `char`

Output Arguments

`M` — Cumulative maxima
vector | matrix | multidimensional array

Cumulative maxima, returned as a vector, matrix, or multidimensional array. The size and data type of `M` are the same as those of `A`.

Tips

- The `'reverse'` option in many cumulative functions allows quick directional calculations without requiring a flip or reflection of the input array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'reverse'` direction is not supported.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cummin` | `cumprod` | `cumsum` | `max` | `min` | `movmax`

Introduced in R2014b

cummin

Cumulative minimum

Syntax

```
M = cummin(A)
M = cummin(A,dim)
M = cummin( ___ ,direction)
M = cummin( ___ ,nanflag)
```

Description

`M = cummin(A)` returns the cumulative minimum elements of `A`. By default, `cummin(A)` operates along the first array dimension whose size does not equal 1.

- If `A` is a vector, then `cummin(A)` returns a vector of the same size containing the cumulative minima of `A`.
- If `A` is a matrix, then `cummin(A)` returns a matrix of the same size containing the cumulative minima in each column of `A`.
- If `A` is a multidimensional array, then `cummin(A)` returns an array of the same size containing the cumulative minima along the first array dimension of `A` whose size does not equal 1.

`M = cummin(A,dim)` returns the cumulative minima along the dimension `dim`. For example, if `A` is a matrix, then `cummin(A,2)` returns the cumulative minima along the rows of `A`.

`M = cummin( ___ ,direction)` optionally specifies the direction using any of the previous syntaxes. You must specify `A` and, optionally, can specify `dim`. For instance, `cummin(A,2,'reverse')` returns the cumulative minima of `A` by working from end to beginning of the second dimension of `A`.

`M = cummin( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `cummin(A,'includenan')` includes all `NaN` values in the calculation while `cummin(A,'omitnan')` ignores them.

Examples

Cumulative Minimum Values in Vector

Find the cumulative minima of a 1-by-10 vector of random integers.

```
v = randi([0,10],1,10)
```

```
v =

     8     9     1    10     6     1     3     6    10    10
```

```
M = cummin(v)
```

```
M =

     8     8     1     1     1     1     1     1     1     1
```

Cumulative Minimum Values in Matrix Columns

Find the cumulative minima of the columns of a 3-by-3 matrix.

```
A = [3 5 2; 1 6 3; 7 8 1]
```

```
A =

     3     5     2
     1     6     3
     7     8     1
```

```
M = cummin(A)
```

```
M =

     3     5     2
     1     5     2
     1     5     1
```

Cumulative Minimum Values in Matrix Rows

Find the cumulative minima of the rows of a 3-by-3 matrix.

```
A = [3 5 2; 1 6 3; 7 8 1]
```

```
A =

     3     5     2
     1     6     3
     7     8     1
```

```
M = cummin(A,2)
```

```
M =

     3     3     2
     1     1     1
     7     7     1
```

Cumulative Minimum Array Values in Reverse Direction

Calculate the cumulative minima in the third dimension of a 2-by-2-by-3 array. Specify `direction` as `'reverse'` to work from the end of the third dimension to the beginning.

```
A = cat(3,[1 2; 3 4],[9 10; 11 12],[5 6; 7 8])
```

```
A =

(:,:,1) =

     1     2
     3     4


(:,:,2) =

     9    10
    11    12


(:,:,3) =

     5     6
     7     8
```

```
M = cummin(A,3,'reverse')
```

```
M =

(:,:,1) =

     1     2
     3     4


(:,:,2) =

     5     6
     7     8


(:,:,3) =

     5     6
     7     8
```

Vector with NaN Values

Create a vector containing NaN values and compute the cumulative minima. By default, cummin ignores NaN values.

```
A = [3 5 NaN 9 0 NaN];
M = cummin(A)
```

```
M =

     3     3     3     3     0     0
```

If you include NaN values in the calculation, then the cumulative minimum becomes NaN as soon as the first NaN value in A is encountered.

```
M = cummin(A,'includenan')
```

```
M =

     3     3   NaN   NaN   NaN   NaN
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array. For complex elements, `cummin` compares the magnitude of the elements. If magnitudes are equal, `cummin` also compares the phase angles.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `duration`
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional input array, A:

- `cummin(A,1)` works on successive elements in the columns of A and returns an array of the same size as A with the cumulative minima in each column.



- `cummin(A,2)` works on successive elements in the rows of A and returns an array of the same size as A with the cumulative minima in each row.



cummin(A,2)

`cummin` returns `A` if `dim` is greater than `ndims(A)`.

`direction` — Direction of cumulation
`'forward'` (default) | `'reverse'`

Direction of cumulation, specified as `'forward'` (default) or `'reverse'`.

- `'forward'` works from `1` to `end` of the active dimension.
- `'reverse'` works from `end` to `1` of the active dimension.

Data Types: `char`

`nanflag` — `NaN` condition
`'omitnan'` (default) | `'includenan'`

`NaN` condition, specified as one of the following values:

- `'omitnan'` — Ignore all `NaN` values in the input. If the input has consecutive leading `NaN` values, then `cummin` returns `NaN` in the corresponding elements of the output. For example, `cummin([NaN 7 13 6],'omitnan')` returns the row vector `[NaN 7 7 6]`.
- `'includenan'` — Include `NaN` values from the input when computing the cumulative minima, resulting in `NaN` values in the output.

Data Types: `char`

Output Arguments

`M` — Cumulative minima
vector | matrix | multidimensional array

Cumulative minima, returned as a vector, matrix, or multidimensional array. The size and data type of `M` are the same as those of `A`.

Tips

- The `'reverse'` option in many cumulative functions allows quick directional calculations without requiring a flip or reflection of the input array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'reverse'` direction is not supported.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cummax` | `cumprod` | `cumsum` | `max` | `min` | `movmin`

Introduced in R2014b

cumprod

Cumulative product

Syntax

```
B = cumprod(A)
B = cumprod(A,dim)
B = cumprod( ___ ,direction)
B = cumprod( ___ ,nanflag)
```

Description

`B = cumprod(A)` returns the cumulative product of `A` starting at the beginning of the first array dimension in `A` whose size does not equal 1.

- If `A` is a vector, then `cumprod(A)` returns a vector containing the cumulative product of the elements of `A`.
- If `A` is a matrix, then `cumprod(A)` returns a matrix containing the cumulative products for each column of `A`.
- If `A` is a multidimensional array, then `cumprod(A)` acts along the first nonsingleton dimension.

`B = cumprod(A,dim)` returns the cumulative product along dimension `dim`. For example, if `A` is a matrix, then `cumprod(A,2)` returns the cumulative product of each row.

`B = cumprod( ___ ,direction)` optionally specifies the direction using any of the previous syntaxes. You must specify `A`, and optionally can specify `dim`. For instance, `cumprod(A,2,'reverse')` returns the cumulative product within the rows of `A` by working from end to beginning of the second dimension.

`B = cumprod( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `cumprod(A,'includenan')` includes `NaN` values in the calculation while `cumprod(A,'omitnan')` ignores them.

Examples

Cumulative Product of Vector

Find the cumulative product of the integers from 1 to 5. The element B(2) is the product of A(1) and A(2), while B(5) is the product of elements A(1) through A(5).

```
A = 1:5;
B = cumprod(A)
```

```
B =

     1     2     6    24   120
```

Cumulative Product of Each Column in Matrix

Define a 3-by-3 matrix whose elements correspond to their linear indices.

```
A = [1 4 7; 2 5 8; 3 6 9]
```

```
A =

     1     4     7
     2     5     8
     3     6     9
```

Find the cumulative product of the columns of A. The element B(5) is the product of A(4) and A(5), while B(9) is the product of A(7) , A(8), and A(9).

```
B = cumprod(A)
```

```
B =

     1     4     7
     2    20    56
     6   120   504
```

Cumulative Product of Each Row in Matrix

Define a 2-by-3 matrix whose elements correspond to their linear indices.

```
A = [1 3 5; 2 4 6]
```

```
A =

     1     3     5
     2     4     6
```

Find the cumulative product of the rows of A. The element B(3) is the product of A(1) and A(3), while B(5) is the product of A(1), A(3), and A(5).

```
B = cumprod(A,2)
```

```
B =

     1     3    15
     2     8    48
```

Logical Input with Double Output

Create an array of logical values.

```
A = [true false true; true true false]
```

```
A = 2×3 logical array
   1   0   1
   1   1   0
```

Find the cumulative product of the rows of A.

```
B = cumprod(A,2)
```

```
B =

     1     0     0
     1     1     0
```

The output has type double.

```
class(B)
```

```
ans =
```

```
'double'
```

Reverse Cumulative Product

Create a 3-by-3 matrix of random integers between 1 and 10.

```
rng default;
A = randi([1,10],3)
```

```
A =

     9    10     3
    10     7     6
     2     1    10
```

Calculate the cumulative product along the columns. Specify the `'reverse'` option to work from bottom to top in each column. The result is the same size as `A`.

```
B = cumprod(A,'reverse')
```

```
B =

   180    70   180
    20     7    60
     2     1    10
```

Vector with `NaN` Values

Create a vector containing `NaN` values and compute the cumulative products. By default, `cumprod` includes `NaN` values. When you include `NaN` values in the calculation, the cumulative product becomes `NaN` as soon as the first `NaN` value in `A` is encountered.

```
A = [1 3 NaN 2 4 NaN];
B = cumprod(A)
```

```
B =

     1     3   NaN   NaN   NaN   NaN
```

Ignore `NaN` values in the cumulative product calculation using the `'omitnan'` option.

```
B = cumprod(A,'omitnan')
```

```
B =

     1     3     3     6    24    24
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional input array, A.

- `cumprod(A,1)` works on successive elements in the columns of A and returns the cumulative products of each column.
- `cumprod(A,2)` works on successive elements in the rows of A and returns the cumulative products of each row.

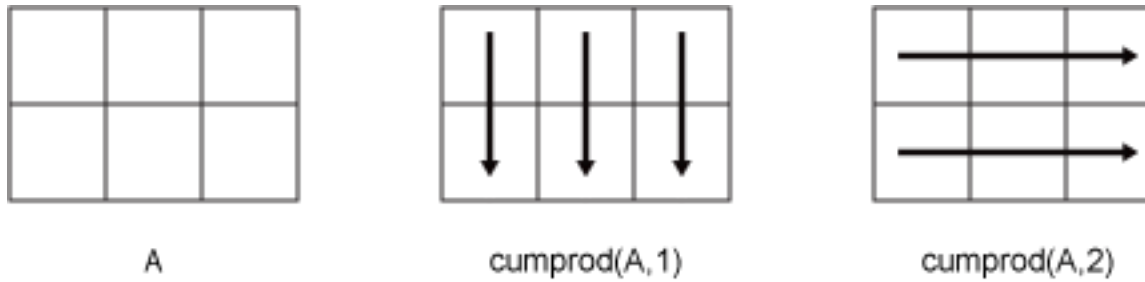

`cumprod` returns `A` if `dim` is greater than `ndims(A)`.

`direction` — Direction of cumulation
`'forward'` (default) | `'reverse'`

Direction of cumulation, specified as `'forward'` (default) or `'reverse'`.

- `'forward'` works from `1` to `end` of the active dimension.
- `'reverse'` works from `end` to `1` of the active dimension.

`nanflag` — `NaN` condition
`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of these values:

- `'includenan'` — Include `NaN` values from the input when computing each product, resulting in `NaN` values in the output.
- `'omitnan'` — Ignore `NaN` values in the input. The product of elements containing `NaN` values is the product of all non-`NaN` elements. If all elements are `NaN`, then `cumprod` returns 1.

Output Arguments

`B` — Cumulative product array
vector | matrix | multidimensional array

Cumulative product array, returned as a vector, matrix, or multidimensional array of the same size as the input array `A`.

The class of `B` is the same as the class of `A` except if `A` is `logical`, in which case `B` is `double`.

Definitions

First Nonsingleton Dimension

The first nonsingleton dimension is the first dimension of an array whose size is not equal to `1`.

For example:

- If `X` is a 1-by-n row vector, then the second dimension is the first nonsingleton dimension of `X`.
- If `X` is a 1-by-0-by-n empty array, then the second dimension is the first nonsingleton dimension of `X`.
- If `X` is a 1-by-1-by-3 array, then the third dimension is the first nonsingleton dimension of `X`.

Tips

- Many cumulative functions in MATLAB support the `'reverse'` option. This option allows quick directional calculations without needing a flip or reflection of the input array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'reverse'` direction is not supported.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Logical inputs are not supported. Cast input to `double` first.

See Also

See Also

`cummax` | `cummin` | `cumsum` | `movprod` | `prod` | `sum`

Introduced before R2006a

cumsum

Cumulative sum

Syntax

```
B = cumsum(A)
B = cumsum(A,dim)
B = cumsum( ___ ,direction)
B = cumsum( ___ ,nanflag)
```

Description

`B = cumsum(A)` returns the cumulative sum of `A` starting at the beginning of the first array dimension in `A` whose size does not equal 1.

- If `A` is a vector, then `cumsum(A)` returns a vector containing the cumulative sum of the elements of `A`.
- If `A` is a matrix, then `cumsum(A)` returns a matrix containing the cumulative sums for each column of `A`.
- If `A` is a multidimensional array, then `cumsum(A)` acts along the first nonsingleton dimension.

`B = cumsum(A,dim)` returns the cumulative sum of the elements along dimension `dim`. For example, if `A` is a matrix, then `cumsum(A,2)` returns the cumulative sum of each row.

`B = cumsum( ___ ,direction)` optionally specifies the direction using any of the previous syntaxes. You must specify `A`, and optionally can specify `dim`. For instance, `cumsum(A,2,'reverse')` returns the cumulative sum within the rows of `A` by working from end to beginning of the second dimension.

`B = cumsum( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `cumsum(A,'includenan')` includes all `NaN` values in the calculation while `cumsum(A,'omitnan')` ignores them.

Examples

Cumulative Sum of Vector

Find the cumulative sum of the integers from 1 to 5. The element B(2) is the sum of A(1) and A(2), while B(5) is the sum of elements A(1) through A(5).

```
A = 1:5;
B = cumsum(A)
```

```
B =

     1     3     6    10    15
```

Cumulative Sum of Each Column in Matrix

Define a 3-by-3 matrix whose elements correspond to their linear indices.

```
A = [1 4 7; 2 5 8; 3 6 9]
```

```
A =

     1     4     7
     2     5     8
     3     6     9
```

Find the cumulative sum of the columns of A. The element B(5) is the sum of A(4) and A(5), while B(9) is the sum of A(7), A(8), and A(9).

```
B = cumsum(A)
```

```
B =

     1     4     7
     3     9    15
     6    15    24
```

Cumulative Sum of Each Row in Matrix

Define a 2-by-3 matrix whose elements correspond to their linear indices.

```
A = [1 3 5; 2 4 6]
```

```
A =

     1     3     5
     2     4     6
```

Find the cumulative sum of the rows of A. The element B(3) is the sum of A(1) and A(3), while B(5) is the sum of A(1), A(3), and A(5).

```
B = cumsum(A,2)
```

```
B =

     1     4     9
     2     6    12
```

Cumulative Sum of Logical Input

Create an array of logical values.

```
A = [true false true; true true false]
```

```
A = 2×3 logical array
   1   0   1
   1   1   0
```

Find the cumulative sum of the rows of A.

```
B = cumsum(A,2)
```

```
B =

     1     1     2
     1     2     2
```

The output has type double.

```
class(B)
```

```
ans =
'double'
```

Reverse Cumulative Sum

Create a 3-by-3 matrix of random integers between 1 and 10.

```
rng default;
A = randi([1,10],3)
```

```
A =

     9    10     3
    10     7     6
     2     1    10
```

Calculate the cumulative sum along the rows. Specify the `'reverse'` option to work from right to left in each row. The result is the same size as `A`.

```
B = cumsum(A,2,'reverse')
```

```
B =

    22    13     3
    23    13     6
    13    11    10
```

Vector with `NaN` Values

Create a vector containing `NaN` values and compute the cumulative sums. By default, `cumsum` includes `NaN` values. When you include `NaN` values in the calculation, the cumulative sum becomes `NaN` as soon as the first `NaN` value in `A` is encountered.

```
A = [3 5 NaN 9 0 NaN];
B = cumsum(A)
```

```
B =

     3     8   NaN   NaN   NaN   NaN
```

You can ignore `NaN` values in the cumulative sum calculation using the `'omitnan'` option.

```
B = cumsum(A,'omitnan')
```

```
B =

     3     8     8    17    17    17
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `duration`
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional input array, A:

- `cumsum(A,1)` works on successive elements in the columns of A and returns the cumulative sums of each column.
- `cumsum(A,2)` works on successive elements in the rows of A and returns the cumulative sums of each row.

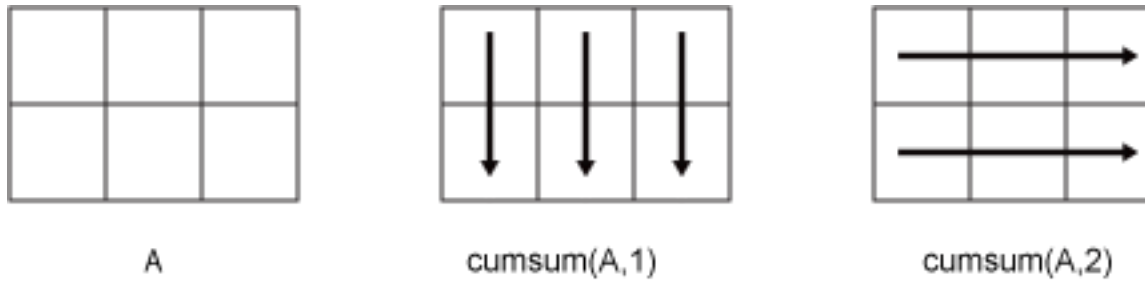

`cumsum` returns A if `dim` is greater than `ndims(A)`.

`direction` — Direction of cumulation
`'forward'` (default) | `'reverse'`

Direction of cumulation, specified as `'forward'` (default) or `'reverse'`.

- `'forward'` works from `1` to `end` of the active dimension.
- `'reverse'` works from `end` to `1` of the active dimension.

Data Types: `char`

`nanflag` — `NaN` condition
`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of the following values:

- `'includenan'` — Include `NaN` values from the input when computing the cumulative sums, resulting in `NaN` values in the output.
- `'omitnan'` — Ignore all `NaN` values in the input. The sum of elements containing `NaN` values is the sum of all non-`NaN` elements. If all elements are `NaN`, then `cumsum` returns 0.

Data Types: `char`

Output Arguments

`B` — Cumulative sum array
vector | matrix | multidimensional array

Cumulative sum array, returned as a vector, matrix, or multidimensional array of the same size as the input array `A`.

The class of `B` is the same as the class of `A` except if `A` is `logical`, in which case `B` is `double`.

Definitions

First Nonsingleton Dimension

The first nonsingleton dimension is the first dimension of an array whose size is not equal to `1`.

For example:

- If `X` is a 1-by-n row vector, then the second dimension is the first nonsingleton dimension of `X`.
- If `X` is a 1-by-0-by-n empty array, then the second dimension is the first nonsingleton dimension of `X`.
- If `X` is a 1-by-1-by-3 array, then the third dimension is the first nonsingleton dimension of `X`.

Tips

- Many cumulative functions in MATLAB support the `'reverse'` option. This option allows quick directional calculations without needing a flip or reflection of the input array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'reverse'` direction is not supported.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Logical inputs are not supported. Cast input to `double` first.

See Also

See Also

`cummax` | `cummin` | `cumprod` | `diff` | `movsum` | `prod` | `sum`

Introduced before R2006a

cumtrapz

Cumulative trapezoidal numerical integration

Syntax

```
Z = cumtrapz(Y)
Z = cumtrapz(X,Y)
Z = cumtrapz( ___ ,dim)
```

Description

`Z = cumtrapz(Y)` computes an approximation of the cumulative integral of `Y` via the trapezoidal method with unit spacing. To compute the integral with other than unit spacing, multiply `Z` by the spacing increment. Input `Y` can be complex.

For vectors, `cumtrapz(Y)` is a vector containing the cumulative integral of `Y`.

For matrices, `cumtrapz(Y)` is a matrix the same size as `Y` with the cumulative integral over each column.

For multidimensional arrays, `cumtrapz(Y)` works across the first nonsingleton dimension.

`Z = cumtrapz(X,Y)` computes the cumulative integral of `Y` with respect to `X` using trapezoidal integration. `X` and `Y` must be vectors of the same length, or `X` must be a column vector and `Y` an array whose first nonsingleton dimension is `length(X)`. `cumtrapz` operates across this dimension. Inputs `X` and `Y` can be complex.

If `X` is a column vector and `Y` an array whose first nonsingleton dimension is `length(X)`, `cumtrapz(X,Y)` operates across this dimension.

`Z = cumtrapz( ___ ,dim)` integrates across the dimension of `Y` specified by scalar `dim`, using any of the input arguments in the previous syntaxes. The length of `X` must be the same as `size(Y,dim)`.

Examples

Example 1

```
Y = [0 1 2; 3 4 5];

cumtrapz(Y,1)
ans =
0         0         0
    1.5000   2.5000    3.5000

cumtrapz(Y,2)
ans =
0    0.5000    2.0000
        0    3.5000    8.0000
```

Example 2

This example uses two complex inputs:

```
z = exp(1i*pi*(0:100)/100);

ct = cumtrapz(z,1./z);
ct(end)
ans =
   0.0000 + 3.1411i
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`cumsum` | `trapz`

Introduced before R2006a

curl

Compute curl and angular velocity of vector field

Syntax

```
[curlx,curly,curlz,cav] = curl(X,Y,Z,U,V,W)
[curlx,curly,curlz,cav] = curl(U,V,W)
[curlz,cav]= curl(X,Y,U,V)
[curlz,cav]= curl(U,V)
[curlx,curly,curlz] = curl(...)
[curlx,curly] = curl(...)
cav = curl(...)
```

Description

`[curlx,curly,curlz,cav] = curl(X,Y,Z,U,V,W)` computes the curl (`curlx`, `curly`, `curlz`) and angular velocity (`cav`) perpendicular to the flow (in radians per time unit) of a 3-D vector field `U`, `V`, `W`.

The arrays `X`, `Y`, and `Z`, which define the coordinates for `U`, `V`, and `W`, must be monotonic, but do not need to be uniformly spaced. `X`, `Y`, and `Z` must have the same number of elements, as if produced by `meshgrid`.

`[curlx,curly,curlz,cav] = curl(U,V,W)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X Y Z] = meshgrid(1:n,1:m,1:p)
```

where `[m,n,p] = size(U)`.

`[curlz,cav]= curl(X,Y,U,V)` computes the curl `z`-component and the angular velocity perpendicular to `z` (in radians per time unit) of a 2-D vector field `U`, and `V`.

The arrays `X` and `Y`, which define the coordinates for `U` and `V`, must be monotonic, but do not need to be uniformly spaced. `X` and `Y` must have the same number of elements, as if produced by `meshgrid`.

`[curlz,cav]= curl(U,V)` assumes `X` and `Y` are determined by the expression

```
[X Y] = meshgrid(1:n,1:m)
```

where `[m,n] = size(U)`.

`[curlx,curly,curlz] = curl(...)`, `[curlx,curly] = curl(...)` returns only the curl.

`cav = curl(...)` returns only the curl angular velocity.

Examples

Display Curl Angular Velocity Using Colored Slice Planes

Use colored slice planes to display the curl angular velocity at specified locations in the vector field.

```
load wind
cav = curl(x,y,z,u,v,w);
h = slice(x,y,z,cav,[90 134],59,0);
shading interp
daspect([1 1 1]);
axis tight
colormap(hot(16));
camlight
set([h(1),h(2)],'ambientstrength',.6);
```

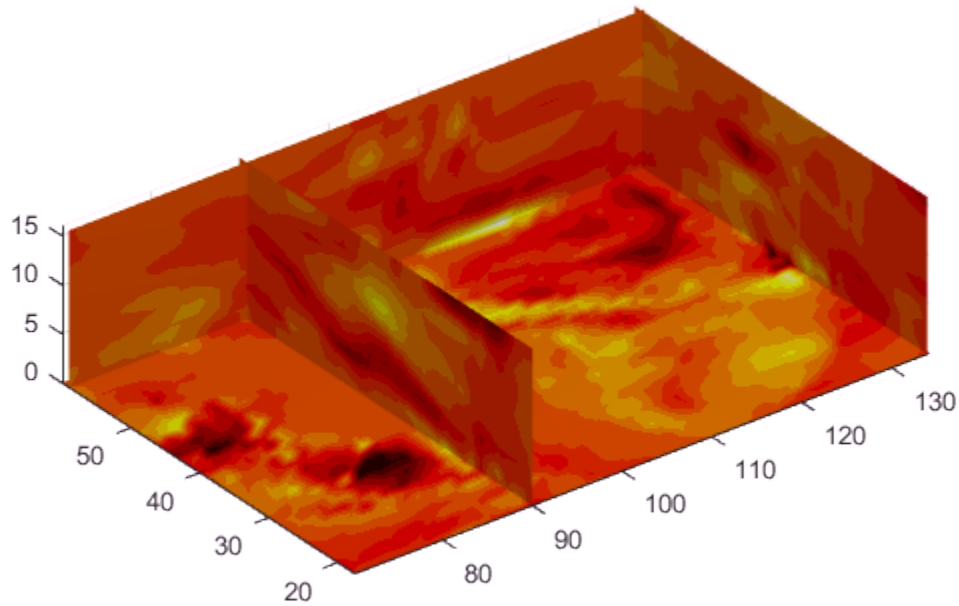

Display Curl Angular Velocity in One Plane

Display the curl angular velocity in one plane of the volume. Then plot the velocity vectors in the same plane.

```
load wind
k = 4;
x = x(:,:,k);
y = y(:,:,k);
u = u(:,:,k);
v = v(:,:,k);
cav = curl(x,y,u,v);
pcolor(x,y,cav);
```

```
shading interp
hold on
quiver(x,y,u,v,'y');
hold off
colormap('copper');
```

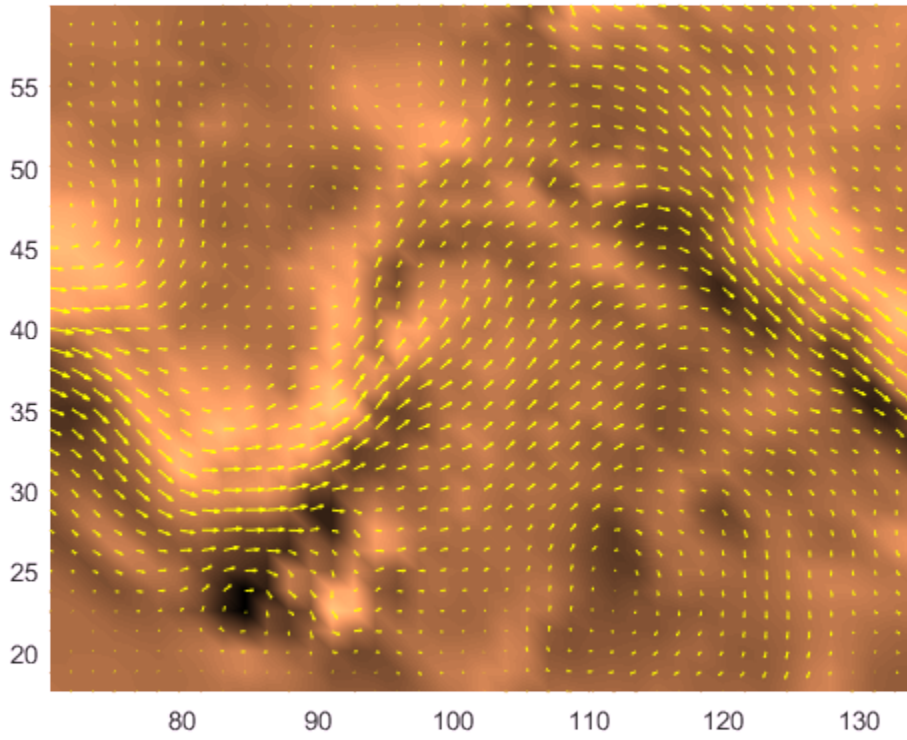

See Also

streamribbon | divergence

Topics

"Displaying Curl with Stream Ribbons"

Introduced before R2006a

currentDirectory

Class: Tiff

Index of current IFD

Syntax

```
dirNum = currentDirectory(tiffobj)
```

Description

`dirNum = currentDirectory(tiffobj)` returns the index of the current image file directory (IFD). Index values are one-based. Use this index value with the `setDirectory` member function.

Examples

Determine Current IFD

Open a `Tiff` object and determine which IFD is the current IFD.

```
t = Tiff('example.tif','r');
dnum = currentDirectory(t)
```

```
dnum = 1
```

Close the `Tiff` object.

```
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"

- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFCurrentDirectory` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.setDirectory

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

customverctrl

(To be removed) Allow custom source control system (UNIX platforms)

Note: `customverctrl` will be removed in a future release.

Syntax

```
customverctrl
```

Description

`customverctrl` function is for customers who want to integrate a source control system that is not supported for use with MATLAB software. When using this function, conform to the structure of one of the supported version control systems, for example, RCS. For examples, see the files `clearcase.m`, `cvs.m`, `pvcs.m`, and `rcs.m` in *`matlabroot`*`\toolbox\matlab\verctrl`.

Introduced before R2006a

cylinder

Generate cylinder



Syntax

```
[X,Y,Z] = cylinder
[X,Y,Z] = cylinder(r)
[X,Y,Z] = cylinder(r,n)
cylinder(axes_handle,...)
cylinder(...)
```

Description

`cylinder` generates *x*-, *y*-, and *z*-coordinates of a unit cylinder. You can draw the cylindrical object using `surf` or `mesh`, or draw it immediately by not providing output arguments.

`[X,Y,Z] = cylinder` returns the *x*-, *y*-, and *z*-coordinates of a cylinder with a radius equal to `1`. The cylinder has 20 equally spaced points around its circumference.

`[X,Y,Z] = cylinder(r)` returns the *x*-, *y*-, and *z*-coordinates of a cylinder using `r` to define a profile curve. `cylinder` treats each element in `r` as a radius at equally spaced heights along the unit height of the cylinder. The cylinder has 20 equally spaced points around its circumference.

`[X,Y,Z] = cylinder(r,n)` returns the *x*-, *y*-, and *z*-coordinates of a cylinder based on the profile curve defined by vector `r`. The cylinder has `n` equally spaced points around its circumference.

`cylinder(axes_handle,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`cylinder(...)`, with no output arguments, plots the cylinder using `surf`.

Examples

Display Unit Cylinder

```
figure
cylinder
```

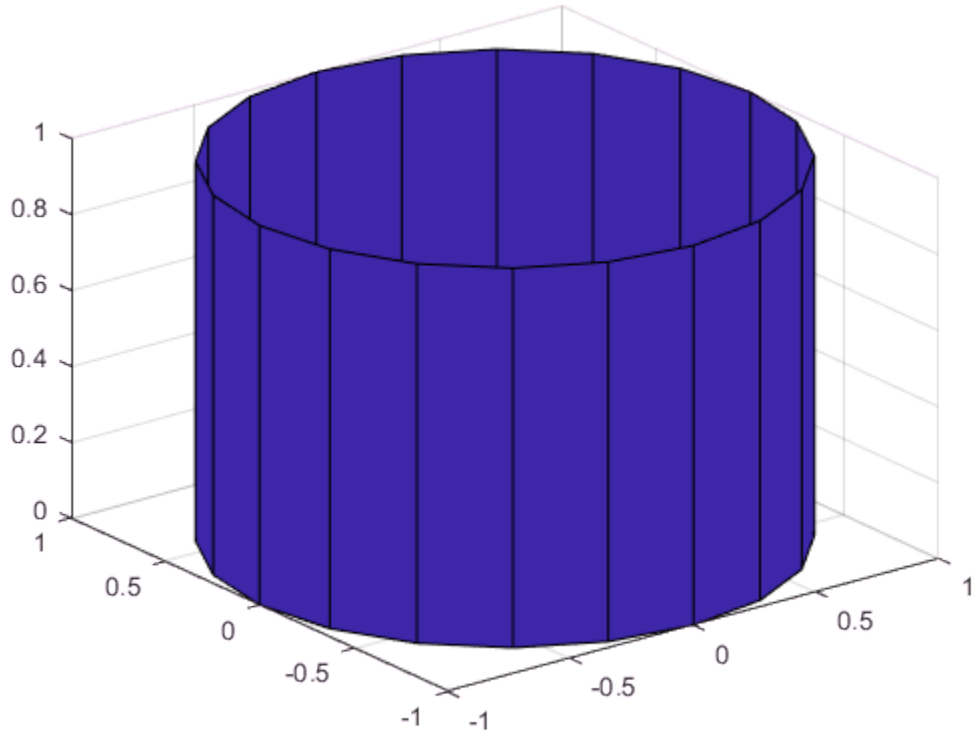

Generate Coordinates of Cylinder and Display Surface

Generate a cylinder defined by the profile function `2+sin(t)`.

```
t = 0:pi/10:2*pi;
figure
[X,Y,Z] = cylinder(2+cos(t));
surf(X,Y,Z)
axis square
```

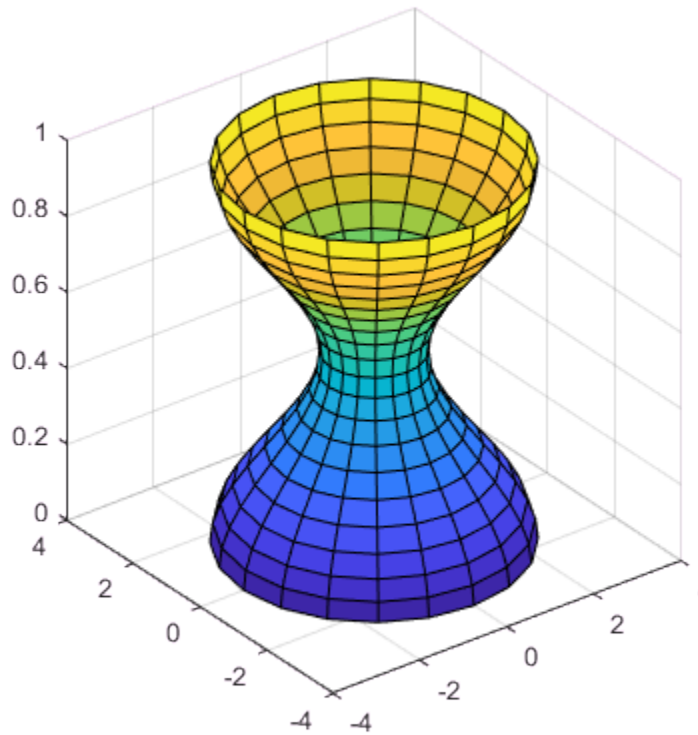

Tips

`cylinder` treats its first argument as a profile curve. The resulting surface graphics object is generated by rotating the curve about the *x*-axis, and then aligning it with the *z*-axis.

See Also

`sphere` | `surf`

Introduced before R2006a

daqread

Read Data Acquisition Toolbox (.daq) file

Syntax

```
data = daqread('filename')
[data,time] = daqread(...)
[data,time,abstime] = daqread(...)
[data,time,abstime,events] = daqread(...)
[data,time,abstime,events,daqinfo] = daqread(...)
data = daqread(...,'Param1', Val1,...)
daqinfo = daqread('filename','info')
```

Description

`data = daqread('filename')` reads all the data from the Data Acquisition Toolbox™ (`.daq`) file specified by `filename`. `daqread` returns `data`, an *m*-by-*n* data matrix, where *m* is the number of samples and *n* is the number of channels. If `data` includes data from multiple triggers, the data from each trigger is separated by a `NaN`. If you set the `OutputFormat` property to `tscollection`, `daqread` returns a time series collection object. See below for more information.

`[data,time] = daqread(...)` returns time/value pairs. `time` is an *m*-by-1 vector, the same length as `data`, that contains the relative time for each sample. Relative time is measured with respect to the first trigger that occurs.

`[data,time,abstime] = daqread(...)` returns the absolute time of the first trigger. `abstime` is returned as a `clock` vector.

`[data,time,abstime,events] = daqread(...)` returns a log of events. `events` is a structure containing event information. If you specify either the`Samples`, `Time`, or `Triggers` parameters (see below), the events structure contains only the specified events.

`[data,time,abstime,events,daqinfo] = daqread(...)` returns a structure, `daqinfo`, that contains two fields: `ObjInfo` and `HwInfo`. `ObjInfo` is a structure containing property name/property value pairs and `HwInfo` is a

structure containing hardware information. The entire event log is returned to `daqinfo.ObjInfo.EventLog`.

`data = daqread(...,'Param1', Val1,...)` specifies the amount of data returned and the format of the data, using the following parameters.

Parameter	Description
`Samples`	Specify the sample range.
`Time`	Specify the relative time range.
`Triggers`	Specify the trigger range.
`Channels`	Specify the channel range. Channel names can be specified as a cell array.
`DataFormat`	Specify the data format as `doubles` (default) or `native`.
`TimeFormat`	Specify the time format as `vector` (default) or `matrix`.
`OutputFormat`	Specify the output format as `matrix` (the default) or `tscollection`. When you specify `tscollection`, `daqread` only returns `data`.

The `Samples`, `Time`, and `Triggers` properties are mutually exclusive; that is, either `Samples`, `Triggers` or `Time` can be defined at once.

`daqinfo = daqread('filename','info')` returns metadata from the file in the `daqinfo` structure, without incurring the overhead of reading the data from the file as well. The `daqinfo` structure contains two fields:

`daqinfo.ObjInfo`

a structure containing parameter/value pairs for the data acquisition object used to create the file, `filename`. Note: The `UserData` property value is not restored.

`daqinfo.HwInfo`

a structure containing hardware information. The entire event log is returned to `daqinfo.ObjInfo.EventLog`.

Examples

Use Data Acquisition Toolbox to acquire data. The analog input object, `ai`, acquires one second of data for four channels, and saves the data to the output file `data.daq`.

```
ai = analoginput('nidaq','Dev1');
chans = addchannel(ai,0:3);
set(ai,'SampleRate',1000)
ActualRate = get(ai,'SampleRate');
set(ai,'SamplesPerTrigger, ActualRate)
set(ai,'LoggingMode','Disk&Memory')
set(ai,'LogFileName','data.daq')
start(ai)
```

After the data has been collected and saved to a disk file, you can retrieve the data and other acquisition-related information using `daqread`. To read all the sample-time pairs from `data.daq`:

```
[data,time] = daqread('data.daq');
```

To read samples 500 to 1000 for all channels from `data.daq`:

```
data = daqread('data.daq','Samples',[500 1000]);
```

To read only samples 1000 to 2000 of channel indices 2, 4 and 7 in native format from the file, `data.daq`:

```
data = daqread('data.daq', 'Samples', [1000 2000],...
               'Channels', [2 4 7], 'DataFormat', 'native');
```

To read only the data which represents the first and second triggers on all channels from the file, `data.daq`:

```
[data,time] = daqread('data.daq', 'Triggers', [1 2]);
```

To obtain the channel property information from `data.daq`:

```
daqinfo = daqread('data.daq','info');
chaninfo = daqinfo.ObjInfo.Channel;
```

To obtain a list of event types and event data contained by `data.daq`:

```
daqinfo = daqread('data.daq','info');
events = daqinfo.ObjInfo.EventLog;
event_type = {events.Type};
event_data = {events.Data};
```

To read all the data from the file `data.daq` and return it as a time series collection object:

```
data = daqread('data.daq','OutputFormat','tscollection');
```

Tips

More About .daq Files

- The format used by `daqread` to return data, relative time, absolute time, and event information is identical to the format used by the `getdata` function that is part of Data Acquisition Toolbox. For more information, see the Data Acquisition Toolbox documentation.
- If data from multiple triggers is read, then the size of the resulting data array is increased by the number of triggers issued because each trigger is separated by a `NaN`.
- `ObjInfo.EventLog` always contains the entire event log regardless of the value specified by `Samples`, `Time`, or `Triggers`.
- The `UserData` property value is not restored when you return device object (`ObjInfo`) information.
- When reading a `.daq` file, the `daqread` function does not return property values that were specified as a cell array.
- Data Acquisition Toolbox (`.daq`) files are created by specifying a value for the `LogFileName` property (or accepting the default value), and configuring the `LoggingMode` property to `Disk` or `Disk&Memory`.

More About Time Series Collection Object Returned

When `OutputFormat` is set to `tscollection`, `daqread` returns a time series collection object. This times series collection object contains an absolute time series object for each channel in the file. The following describes how `daqread` sets some of the properties of the times series collection object and the time series objects.

- The `time` property of the time series collection object is set to the value of the `InitialTriggerTime` property specified in the file.
- The `name` property of each time series object is set to the value of the `Name` property of a channel in the file. If this name cannot be used as a time series object name, `daqread` sets the name to `'Channel'` with the `HwChannel` property of the channel appended.
- The value of the `Units` property of the time series object depends on the value of the `DataFormat` parameter. If the `DataFormat` parameter is set to `'double'`, `daqread` sets the `DataInfo` property of each time series object in the collection to the value

of the `Units` property of the corresponding channel in the file. If the `DataFormat` parameter is set to `'native'`, `daqread` sets the `Units` property to `'native'`. See the Data Acquisition Toolbox documentation for more information on these properties.

- Each time series object will have `tsdata.event` objects attached corresponding to the log of events associated with the channel.

If `daqread` returns data from multiple triggers, the data from each trigger is separated by a `NaN` in the time series data. This increases the length of data and time vectors in the time series object by the number of triggers.

See Also

timeseries | `tscollection`

daspect

Control data unit length along each axis

Syntax

```
daspect(ratio)
d = daspect

daspect auto
daspect manual
m = daspect('mode')

___ = daspect(ax, ___)
```

Description

`daspect(ratio)` sets the data aspect ratio for the current axes. The data aspect ratio is the relative length of the data units along the *x*-axis, *y*-axis, and *z*-axis. Specify `ratio` as a three-element vector of positive values that represent the relative lengths of data units along each axis. For example, `[1 2 3]` indicates that the length from 0 to 1 along the *x*-axis is equal to the length from 0 to 2 along the *y*-axis and 0 to 3 along the *z*-axis. For equal data unit lengths in all directions, use `[1 1 1]`.

`d = daspect` returns the data aspect ratio for the current axes.

`daspect auto` sets an automatic mode, enabling the axes to choose the data aspect ratio. The mode must be automatic to enable the "stretch-to-fill" feature of the axes.

`daspect manual` sets a manual mode and uses the ratio stored in the `DataAspectRatio` property for the `Axes` object. When the mode is manual, it disables the stretch-to-fill behavior of the axes. Specifying a value for the data aspect ratio sets the mode to manual.

`m = daspect('mode')` returns the current mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify the data aspect ratio or set the mode to manual.

`___ = daspect(ax, ___)` uses the axes specified by `ax` instead of the current axes. Specify the axes as the first input argument for any of the previous syntaxes. Use single quotes around the `'auto'` and `'manual'` inputs.

Examples

Use Equal Data Unit Lengths Along Each Axis

Plot a set of data. Use data units of equal lengths in all directions by setting the data aspect ratio to `[1 1 1]`.

```
t = linspace(0,2*pi);
x = cos(t);
y = sin(t);
plot(x,y)
daspect([1 1 1])
```

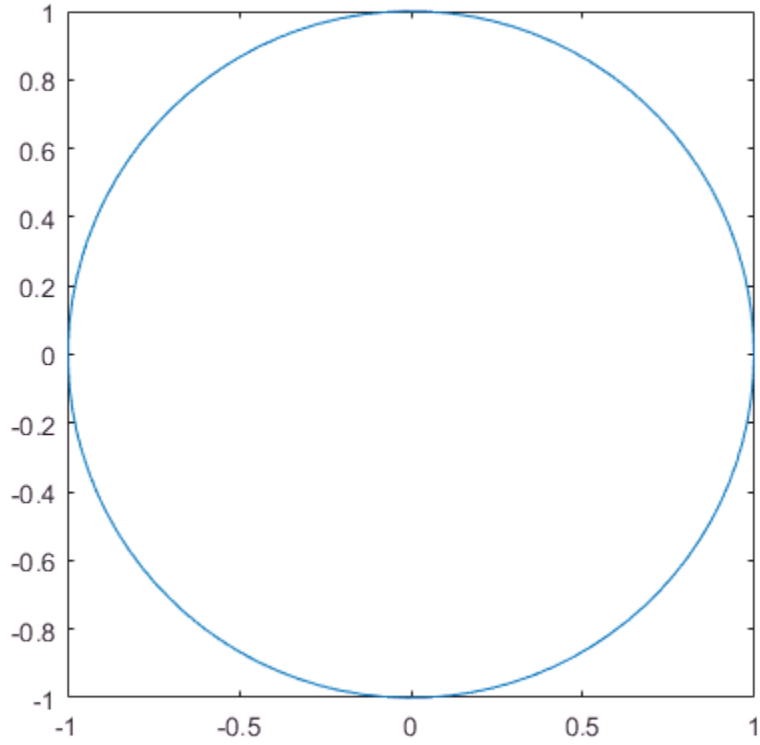

Use Different Data Unit Lengths Along Each Axis

Plot a set of data. Set the data aspect ratio so that the length of one data unit in the *x*-axis direction equals the length of two data units in the *y*-axis direction and *z*-axis direction (not shown).

```
t = linspace(0,2*pi);
x = cos(t);
y = sin(t);
plot(x,y)
daspect([1 2 2])
```

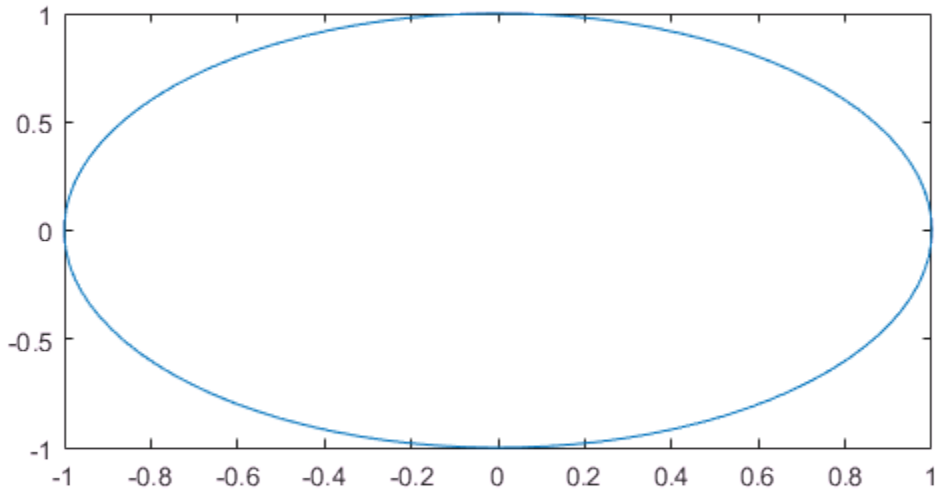

When you set the data aspect ratio, the associated mode changes to manual. Query the current data aspect ratio mode.

```
d = daspect('mode')
```

```
d =
'manual'
```

Revert Back to Default Data Aspect Ratio

Create a 3-D scatter chart of random data and set the data aspect ratio. Then revert back to the default data aspect ratio.

```
X = rand(100,1);
```

```
Y = rand(100,1);
Z = rand(100,1);
scatter3(X,Y,Z)
daspect([3 2 1])
```

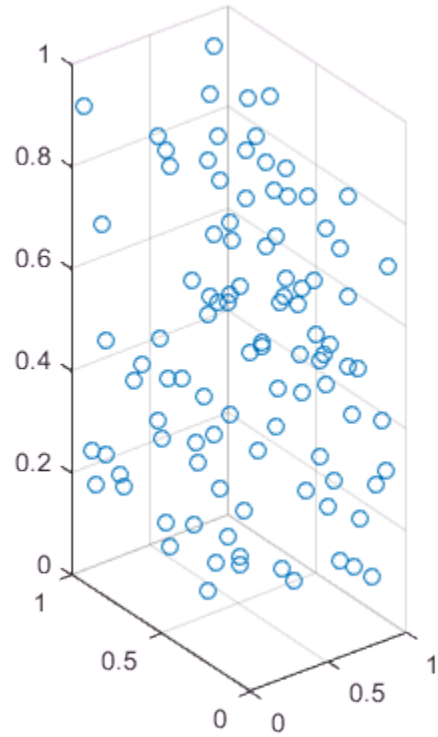


```
daspect auto
```

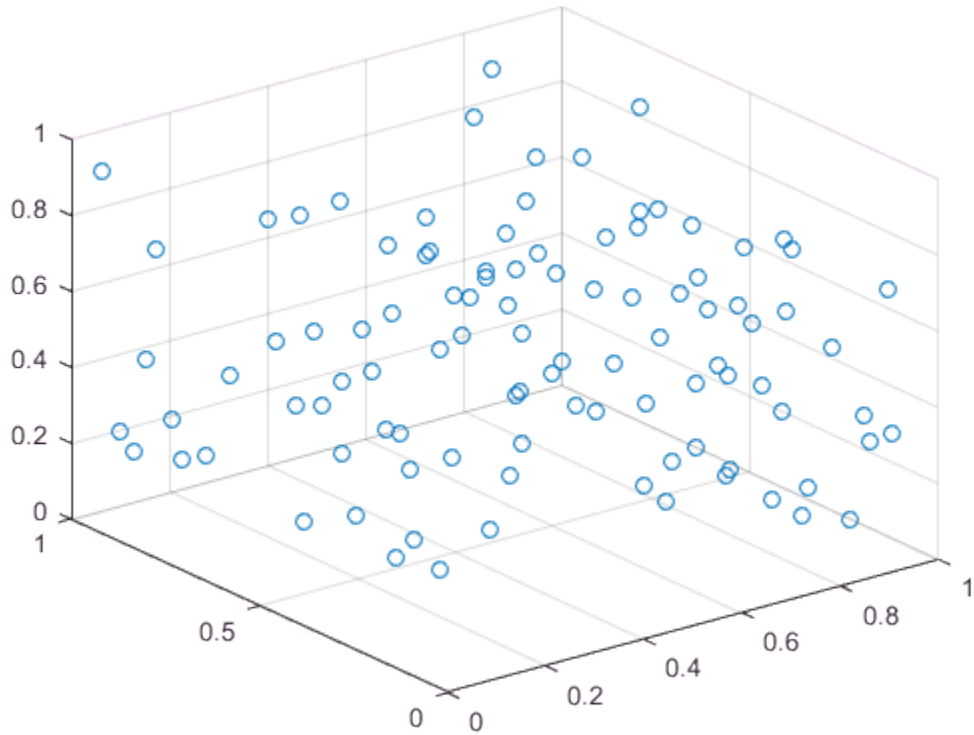

Query Data Aspect Ratio

Create a surface plot and query.

```
[x,y] = meshgrid(-2:.2:2);
z = x.*exp(-x.^2 - y.^2);
surf(x,y,z)
```

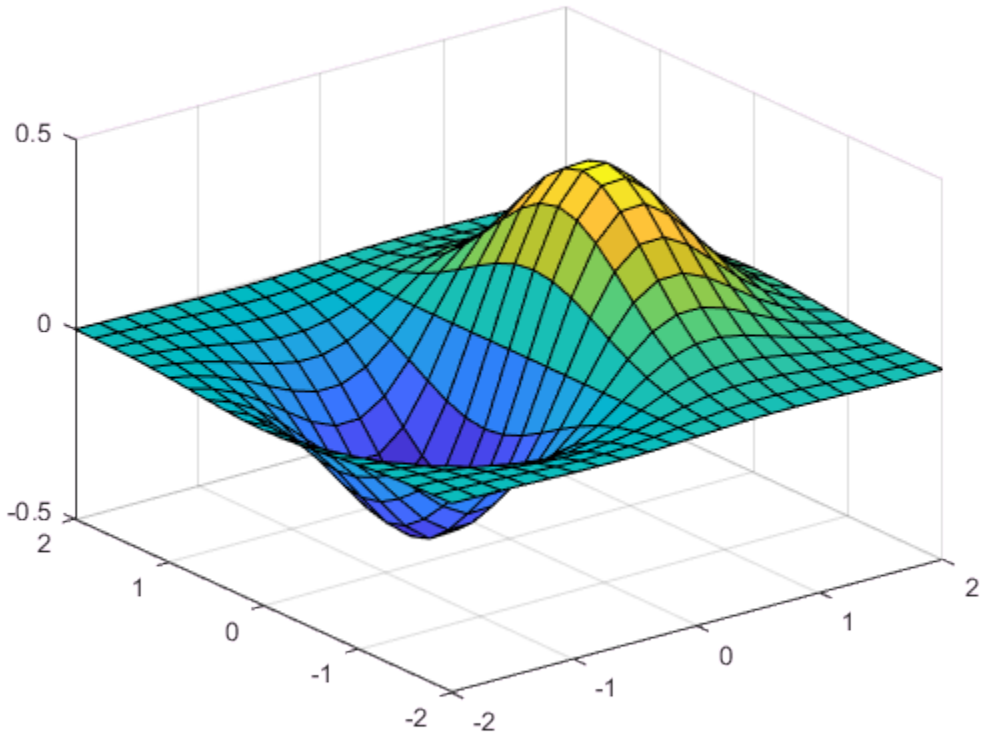

Query the data aspect ratio. The ratio indicates that the length of four units in the *x*-axis direction equals four units in the *y*-axis direction and one unit in the *z*-axis direction. For example, the length from 0 to 1 on the *x*-axis equals the length from 0 to 1 on the *y*-axis and 0 to 0.25 on the *z*-axis.

```
d = daspect
```

```
d =

     4     4     1
```

Set Data Aspect Ratio for Specific Axes Object

Create a figure with two subplots and return the axes objects from the `subplot` function. Set the data aspect ratio for the lower subplot by specifying `ax2` as the first input argument to the `daspect` function.

```
ax1 = subplot(2,1,1);
plot(1:10)

ax2 = subplot(2,1,2);
plot(1:10)
daspect(ax2,[1 2 1])
```

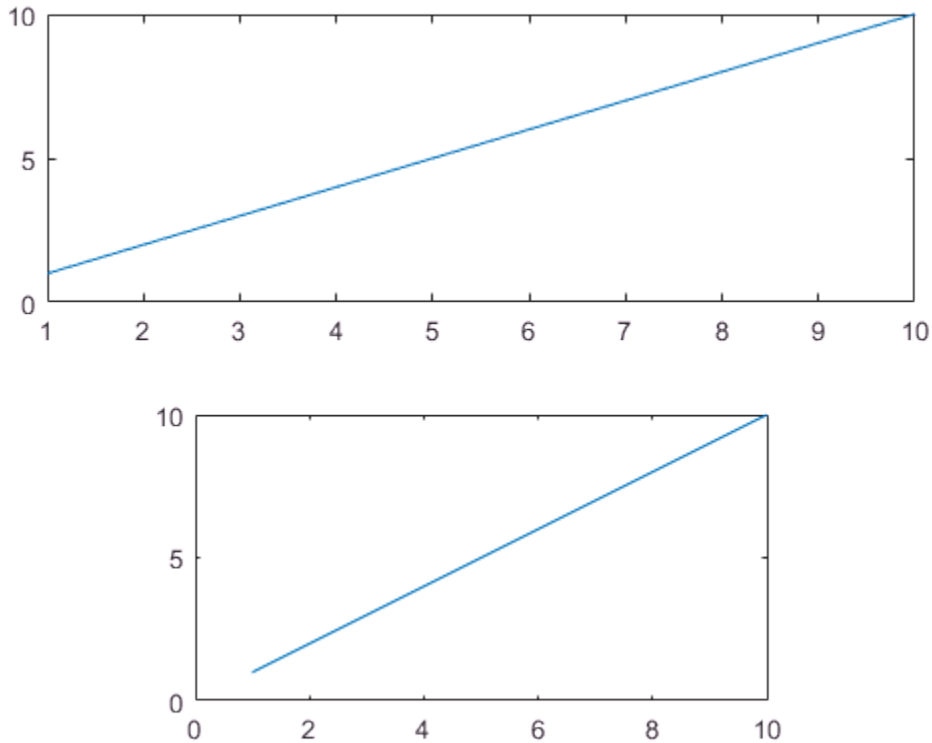

Input Arguments

`ratio` — Data aspect ratio

three-element vector

Data aspect ratio, specified as a three-element vector of positive values. For example, `daspect([1 2 3])` specifies that the length of one unit along the *x*-axis equals the length of two units along the *y*-axis and three units along the *z*-axis.

Specifying the data aspect ratio sets the DataAspectRatio property for the `Axes` object. The `DataAspectRatio` property interacts with the `PlotBoxAspectRatio`, `XLim`, `YLim`, and `ZLim` properties to control the length and scale of the *x*-axis, *y*-axis, and *z*-axis.

Specifying the ratio sets the `DataAspectRatioMode` property to `'manual'` and disables the stretch-to-fill behavior of the axes.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`ax` — Target axes

`Axes` object

Target axes, specified as an `Axes` object. If you do not specify the axes, then `daspect` uses the current axes (`gca`).

Output Arguments

`d` — Current data aspect ratio values

three-element vector

Current data aspect ratio, returned as a three-element vector of values representing the ratio of the *x*-axis, *y*-axis, and *z* data unit lengths.

Querying the data aspect ratio returns the DataAspectRatio property value for the corresponding `Axes` object.

`m` — Current data aspect ratio mode

`'auto'` | `'manual'`

Current data aspect ratio mode, returned as either `'auto'` or `'manual'`. When the mode is automatic, MATLAB determines the appropriate data aspect ratio value. If you specify a value, then the mode changes to manual.

Querying the data aspect ratio mode returns the DataAspectRatioMode property value for the corresponding `Axes` object.

Definitions

Stretch-to-Fill

When the "stretch-to-fill" behavior is enabled, MATLAB stretches the axes to fill the available space. The axes might not exactly match the data aspect ratio, plot box aspect ratio, and camera-view angle values stored in its `DataAspectRatio`, `PlotBoxAspectRatio`, and `CameraViewAngle` properties.

If you specify the data aspect ratio, plot box aspect ratio, or camera-view angle, then the "stretch-to-fill" behavior is disabled. When the behavior is disabled, MATLAB makes the axes as large as possible within the available space and strictly adheres to the property values. There is no distortion. For more information, see "Control Axes Layout".

Algorithms

The `daspect` function sets and queries several axes properties related to the data aspect ratio.

- DataAspectRatio — Property that stores the data aspect ratio value.
- DataAspectRatioMode — Property that stores the data aspect ratio mode. When you set the ratio, this property changes to `'manual'`.

See Also

See Also

`axis` | `pbaspect` | `xlim` | `ylim` | `zlim`

Topics

"Control Ratio of Axis Lengths and Data Unit Lengths"
"Control Axes Layout"

Introduced before R2006a

datacursormode

Enable, disable, and manage interactive data cursor mode

Syntax

```
datacursormode on
datacursormode off
datacursormode
datacursormode toggle
datacursormode(figure_handle)
dcm_obj = datacursormode(figure_handle)
```

Description

`datacursormode on` enables data cursor mode on the current figure.

`datacursormode off` disables data cursor mode on the current figure.

`datacursormode` or `datacursormode toggle` toggles data cursor mode in the current figure.

`datacursormode(figure_handle)` enables or disables data cursor mode on the specified figure.

`dcm_obj = datacursormode(figure_handle)` returns the data cursor mode object for the figure. The object enables you to customize the data cursor. For more information on data cursor mode objects, see "Output Arguments" on page 1-2124. You cannot change the state of data cursor mode in a call to `datacursormode` that returns a mode object.

A *data cursor* is a small black square with a white border that you interactively position on a graph in data cursor mode. When you click a graphic object such as a line on a graph, a *data tip* appears. Data tips are small text boxes or windows that float within an axes that display data values at data cursor locations. The default style is a text box. Data tips list *x*-, *y*- and (where appropriate) *z*-values for one data point at a time. See "Examples" on page 1-2127 for an illustration of these two styles.

Input Arguments

`figure_handle`

Optional handle of figure window

Default: The current figure

`state`

`''`, `'toggle'`, `'on'`, or `'off'`

Default: `'toggle'`

Output Arguments

`dcm_obj`

Use the object returned by `datacursormode` to control aspects of data cursor behavior. You can use the `set` and `get` commands to set and query object property values. You can customize how data cursor mode presents information by coding callback functions for these objects.

Parameter Name/Value Pairs for Data Cursor Mode Objects

The following parameters apply to objects returned by calls to `datacursormode`, not to the function itself.

`'DisplayStyle'`

`datatip | window`

Determines how the data cursor displays.

- `datatip` displays data cursor information in a small yellow text box attached to a black square marker at a data point you interactively select.
- `window` displays data cursor information for the data point you interactively select in a floating window within the figure.

Default: `datatip`

'Enable'

on | off

Specifies whether data cursor mode is currently enabled for the figure.

Default: off

'Figure'

handle

Handle of the figure associated with the data cursor mode object.

'SnapToDataVertex'

on | off

Specifies whether the data cursor snaps to the nearest data value or is located at the actual pointer position.

Default: on

'UpdateFcn'

function handle

Reference to a function that formats the text appearing in the data cursor. You can supply your own function to customize data tip display. Your function must include at least two arguments. The first argument is unused, and can be a variable name or tilde (~). The second argument passes the data cursor event object to your update function. The event object encapsulates the state of the data cursor. The following function definition illustrates the update function:

```
function output_txt = myfunction(~,event_obj)
% ~            Currently not used (empty)
% event_obj    Object containing event data structure
% output_txt   Data cursor text
```

event_obj is an object that has the following properties.

Target	Handle of the object the data cursor is referencing (the object which you click, for example, a line or a bar from a series)
Position	An array specifying the *x*, *y* (and *z* for 3-D graphs) coordinates of the cursor

You can query these properties within your function. For example,

```
pos = get(event_obj,'Position');
```

returns the coordinates of the cursor. Another way of accessing that data is to obtain the struct and query its `Position` field:

```
eventdata = get(event_obj);
pos = eventdata.Position;
```

You can also obtain the position directly from the object:

```
pos = event_obj.Position;
```

You can redefine the data cursor `Updatefcn` at run time. For example:

```
set(dcm_obj,'UpdateFcn',@myupdatefcn)
```

applies the function `myupdatefcn` to the current data tip or tips. When you set an update function in this way, the function must be on the MATLAB path. If instead you select the data cursor mode context menu item **Select text update function**, you can interactively select a function that is not on the path.

Do not redefine figure window callbacks, such as `ButtonDownFcn`, `KeyPressFcn`, or `CloseRequestFcn` *while in data cursor mode*. If you attempt to change any *figure* callbacks when you are in an interactive mode, you receive a warning and the attempt fails. MATLAB interactive modes are:

- `brush`
- `datacursormode`
- `pan`
- `rotate3d`
- `zoom`

This restriction does not apply to changing the figure WindowButtonMotionFcn callback or `uicontrol` callbacks.

Querying Data Cursor Mode

Use the `getCursorInfo` function to query the data cursor mode object (`dcm_obj` in the update function syntax) to obtain information about the data cursor. For example,

```
info_struct = getCursorInfo(dcm_obj);
```

returns a vector of structures, one for each data cursor on the graph. Each structure has the following fields.

`Target`	The handle of the graphics object containing the data point
`Position`	An array specifying the *x*, *y*, (and *z*) coordinates of the cursor

Line and lineseries objects have an additional field.

`DataIndex`	A scalar index into the data arrays that correspond to the nearest data point. The value is the same for each array.

See “Output Arguments” on page 1-2124 for more details on data cursor mode objects.

Examples

This example creates a plot and enables data cursor mode from the command line.

```
surf(peaks)
datacursormode on
% Click mouse on surface to display data cursor
```

Selecting a point on the surface opens a data tip displaying its *x*-, *y*-, and z-coordinates.

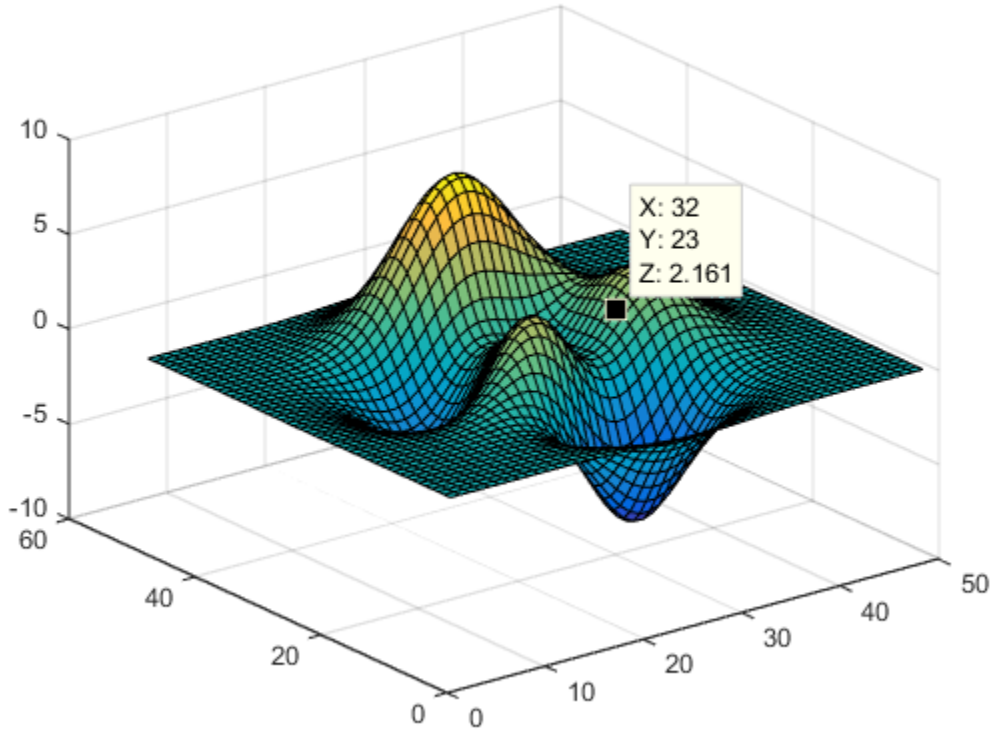

You change the data tip display style to be a window instead of a text box using the **Tools > Options > Display cursor in window** , or use the context menu **Display Style > Window inside figure** to view the data tip in a floating window that you can move around inside the axes.

You can position multiple text box data tips on the same graph, the window style of data tip displays only one value at a time. For more information on interacting with data cursors, including point selection options and exporting data tips to the workspace, see "Display Data Values Interactively".

This example enables data cursor mode on the current figure and sets data cursor mode options. The following statements

- Create a graph
- Toggle data cursor mode to on
- Obtain the data cursor mode object, specify data tip options, and get the handle of the line the data tip occupies:

```
fig = figure;
z = peaks;
plot(z(:,30:35))
dcm_obj = datacursormode(fig);
set(dcm_obj,'DisplayStyle','datatip',...
    'SnapToDataVertex','off','Enable','on')

disp('Click line to display a data tip, then press Return.')
% Wait while the user does this.
pause

c_info = getCursorInfo(dcm_obj);
% Make selected line wider
set(c_info.Target,'LineWidth',2)
```

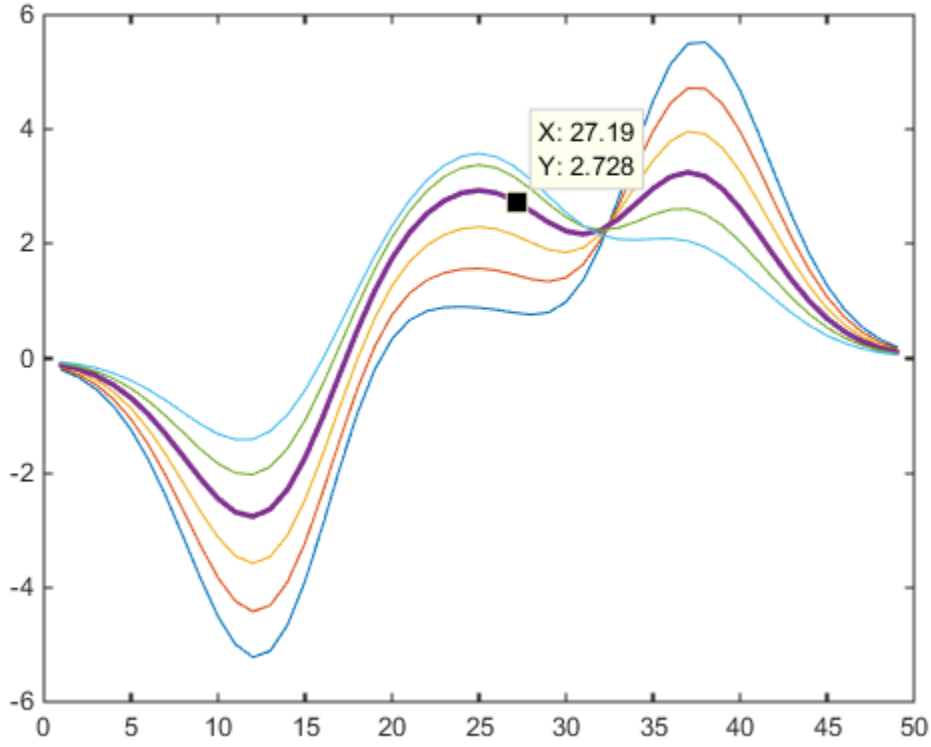

This example shows you how to customize the text that the data cursor displays. For example, you can replace the text displayed in the data tip and data window (`x:` and `y:`) with `Time:` and `Amplitude:` by creating a simple update function.

Save the following functions in your current directory or any writable directory on the MATLAB path before running them. As they are functions, you cannot highlight them and then evaluate the selection to make them work.

Save this code as `doc_datacursormode.m`:

```
function doc_datacursormode
% Plots graph and sets up a custom data tip update function
fig = figure;
```

```
a = -16; t = 0:60;
plot(t,sin(a*t))
dcm_obj = datacursormode(fig);
set(dcm_obj,'UpdateFcn',@myupdatefcn)
```

Save the following code as `myupdatefcn.m` on the MATLAB path:

```
function txt = myupdatefcn(empt,event_obj)
% Customizes text of data tips

pos = get(event_obj,'Position');
txt = {['Time: ',num2str(pos(1))],...
       ['Amplitude: ',num2str(pos(2))]};
```

To set up and use the update function, type:

```
doc_datacursormode
```

When you place a data tip using this update function, it looks like the one in the following figure.



Tutorials

- "Display Data Values Interactively"

Tips

- Most types of graphs and 3-D plots support data cursor mode, but several do not (`pareto`, for example).
- Polar plots support data tips, but display Cartesian rather than polar coordinates on them.
- Histograms created with `histogram` display specialized data tips that itemize the observation counts and bin edges.

- You place data tips only by clicking data objects on graphs. You cannot place them programmatically (by executing code to position a data cursor).
- When `DisplayStyle` is `datatip`, you can place multiple data tips on a graph. When `DisplayStyle` is `window`, it reports only the most recent data tip.
- `datacursormode off` exits data cursor mode but does not remove displayed data tips. However, if the `DisplayStyle` is `window`, the data tip window goes away.

Alternatives

Use the Data Cursor tool to label *x*, *y*, and *z* values on graphs and surfaces. You can control how data tips display by right-clicking and selecting items from the context menu.

See Also

`brush` | `pan` | `rotate3d` | `zoom`

Topics

"Display Data Values Interactively"
"Example — Visually Exploring Demographic Statistics"
"Data Cursors with Histograms"

Introduced before R2006a

datastore

Create datastore for large collections of data

Syntax

```
ds = datastore(location)
ds = datastore(location,Name,Value)
```

Description

`ds = datastore(location)` creates a datastore from the collection of data specified by `location`. A datastore is a repository for collections of data that are too large to fit in memory. After creating `ds`, you can read and process the data.

`ds = datastore(location,Name,Value)` specifies additional parameters for `ds` using one or more name-value pair arguments. For example, you can create a datastore for image files by specifying `'Type','image'`.

Examples

Create Datastore for Text Data

Create a datastore associated with the sample file `airlinesmall.csv`. This file contains airline data from the years 1987 through 2008.

To manage the import of missing data in numeric columns, use the `'TreatAsMissing'` name-value pair argument. In this example, specifying the value `'NA'` for `'TreatAsMissing'`, replaces every instance of `'NA'` with a `NaN` in the imported data. Where, `NaN` is the value specified in the `'MissingValue'` property of the datastore.

```
ds = datastore('airlinesmall.csv', ...
                   'TreatAsMissing','NA')
```

```
ds 
  TabularTextDatastore with properties:

                       Files: {
```

```
                              'B:\matlab\toolbox\matlab\demos\airlinesmall.csv'
                              }
                 FileEncoding: 'UTF-8'
            ReadVariableNames: true
                VariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}

  Text Format Properties:
              NumHeaderLines: 0
                   Delimiter: ','
                 RowDelimiter: '\r\n'
              TreatAsMissing: 'NA'
                MissingValue: NaN

  Advanced Text Format Properties:
            TextscanFormats: {'%f', '%f', '%f' ... and 26 more}
                   TextType: 'char'
         ExponentCharacters: 'eEdD'
                CommentStyle: ''
                  Whitespace: ' \b\t'
    MultipleDelimitersAsOne: false

  Properties that control the table returned by preview, read, readall:
      SelectedVariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
            SelectedFormats: {'%f', '%f', '%f' ... and 26 more}
                   ReadSize: 20000 rows
```

`datastore` creates a `TabularTextDatastore`.

Create Datastore for Image Data

Create a datastore containing all `.tif` files in the MATLAB® path and its subfolders.

```
ds = datastore(fullfile(matlabroot, 'toolbox', 'matlab'),...
'IncludeSubfolders', true,'FileExtensions', '.tif','Type', 'image')
```

```
ds =

  ImageDatastore with properties:

       Files: {
              ' ...\matlab\toolbox\matlab\demos\example.tif';
              ' ...\matlab\toolbox\matlab\imagesci\corn.tif'
```

```
            }
  ReadSize: 1
    Labels: {}
   ReadFcn: @readDatastoreImage
```

Input Arguments

`location` — Files or folders to include in the datastore

character vector | cell array of character vectors

Files or folders to include in the datastore, specified as a character vector or cell array of character vectors. If the files are not in the current folder, then `location` must be full or relative paths. Files within subfolders of the specified folder are not automatically included in the datastore.

You can use the wildcard character (*) when specifying `location`. This character indicates that all matching files or all files in the matching folders are included in the datastore.

If the files are not available locally, then the full path of the files or folders must be an internationalized resource identifier (IRI), such as `hdfs://hostname:portnumber/path_to_file`.

For information on using `datastore` with Amazon S3™ and HDFS™, see "Read Remote Data".

Note: When reading from HDFS or when reading Sequence files locally, the `datastore` function calls the `javaaddpath` command. This command does the following:

- Clears the definitions of all Java classes defined by files on the dynamic class path
- Removes all global variables and variables from the base workspace
- Removes all compiled scripts, functions, and MEX-functions from memory

To prevent persistent variables, code files, or MEX-files from being cleared, use the `mlock` function.

For `KeyValueDatastore`, the files must be MAT-files or Sequence files generated by the `mapreduce` function. MAT-files must be in a local file system or in a network

file system. Sequence files can be in a local, network, or HDFS file system. For `DatabaseDatastore`, the location argument need not be files. For more information, see `DatabaseDatastore`.

Example: `'file1.csv'`

Example: `'../dir/data/file1.jpg'`

Example: `{'C:\dir\data\file1.xls','C:\dir\data\file2.xlsx'}`

Example: `'C:\dir\data\*.mat'`

Example: `'hdfs://myserver:7867/data/file1.txt'`

Data Types: `char` | `cell`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'FileExtensions',{'.jpg','.tif'}` includes all extensions with a `.jpg` or `.tif` extension for an `ImageDatastore` object.

`'Type'` — Type of datastore

`'tabulartext'` | `'image'` | `'spreadsheet'` | `'keyvalue'` | `'file'` | `'tall'` | ...

Type of datastore, specified as the comma-separated pair consisting of `'Type'` and one of the following:

Value of `'Type'`	Description
`'tabulartext'`	Text files containing tabular data. The encoding of the data must be ASCII or UTF-8.
`'image'`	Image files in a format such as JPEG or PNG. Acceptable files include `imformats` formats.
`'spreadsheet'`	Spreadsheet files containing one or more sheets.

Value of `'Type'`	Description
`'keyvalue'`	Key-value pair data contained in MAT-files or Sequence files with data generated by `mapreduce`.
`'file'`	Custom format files, which require a specified read function to read the data. For more information, see FileDatastore.
`'tall'`	MAT-files or Sequence files produced by the `write` function of the `tall` data type. For more information see, TallDatastore.
`'database'`	Data stored in database. Requires Database Toolbox™. Requires specification of additional input argument when using the `type` parameter. For more information, see DatabaseDatastore.

- If there are multiple types that support the format of the files, then use the `'Type'` argument to specify a datastore type.
- If you do not specify a value for `'Type'`, then `datastore` automatically determines the appropriate type of datastore to create based on the extensions of the files.

Data Types: `char`

`'IncludeSubfolders'` — Include subfolders within folder

`true` or `false` | 0 or 1

Include subfolders within a folder, specified as the comma-separated pair consisting of `'IncludeSubfolders'` and `true` (1) or `false` (0). Specify `true` to include all files and subfolders within each folder or `false` to include only the files within each folder.

When you do not specify `'IncludeSubfolders'`, then the default value is `false`.

The `'IncludeSubfolders'` name-value pair is only valid when creating these objects:

- `TabularTextDatastore`
- `ImageDatastore`
- `SpreadsheetDatastore`

- `FileDatastore`
- `KeyValueDatastore`

Example: `'IncludeSubfolders',true`

Data Types: `logical` | `double`

`'FileExtensions'` — Extensions of files
character vector | cell array of character vectors

Extensions of files, specified as the comma-separated pair consisting of `'FileExtensions'` and a character vector or cell array of character vectors. When specifying `'FileExtensions'`, also specify `'Type'`. You can use the empty quotes `''` to represent files without extensions.

If `'FileExtensions'` is not specified, then `datastore` automatically includes all supported file extensions depending on the datastore type. If you want to include unsupported extensions, then specify each extension you want to include individually.

- For `TabularTextDatastore` objects, supported extensions include `.txt`, `.csv`, `.dat`, `.dlm`, `.asc`, `.text`, and no extension.
- For `ImageDatastore` objects, supported extensions include all `imformats` extensions.
- For `SpreadsheetDatastore` objects, supported extensions include `.xls`, `.xlsx`, `.xlsm`, `.xltx`, and `.xltm`.
- For `TallDatastore` objects, supported extensions include `.mat` and `.seq`.

The `'FileExtensions'` name-value pair is only valid when creating these objects:

- `TabularTextDatastore`
- `ImageDatastore`
- `SpreadsheetDatastore`
- `FileDatastore`
- `KeyValueDatastore`

Example: `'FileExtensions','.jpg'`

Example: `'FileExtensions',{'.txt','.text'}`

Data Types: `char` | `cell`

`'TextType'` — Output data type of text variables
`'char'` (default) | `'string'`

Output data type of text variables, specified as the comma-separated pair consisting of `'TextType'` and either `'char'` or `'string'`. If the output table from the `read`, `readall`, or `preview` functions contains text variables, then `'TextType'` specifies the data type of those variables for `TabularTextDatastore` and `SpreadsheetDatastore` objects only. If `'TextType'` is `'char'`, then the output is a cell array of character vectors. If `'TextType'` is `'string'`, then the output has type `string`.

Data Types: `char`

`'DatetimeType'` — Type for imported date and time data
`'datetime'` (default) | `'text'`

Type for imported date and time data, specified as the comma-separated pair consisting of `'DatetimeType'` and one of these values: `'datetime'` or `'text'`. The `'DatetimeType'` argument only applies when creating a `TabularTextDatastore` object.

Value	Type for Imported Date and Time Data
`'datetime'`	MATLAB `datetime` data type For more information, see `datetime`.
`'text'`	If `'DatetimeType'` is specified as `'text'`, then the type for imported date and time data depends on the value specified in the `'TextType'` parameter: • If `'TextType'` is `'char'`, then the `datastore` returns dates as a cell array of character vectors. • If `'TextType'` is `'string'`, then the `datastore` returns dates as an array of strings.

Example: `'DatetimeType','datetime'`

Data Types: `char`

In addition to these name-value pairs, you also can specify any of the properties on the following pages as name-value pairs, except for the `Files` property:

- TabularTextDatastore Properties for `TabularTextDatastore` objects
- ImageDatastore for `ImageDatastore` objects
- SpreadsheetDatastore Properties for `SpreadsheetDatastore` objects
- KeyValueDatastore for `KeyValueDatastore` objects
- TallDatastore for `TallDatastore` objects
- DatabaseDatastore for `DatabaseDatastore` objects

Output Arguments

ds — Datastore for collection of data

`TabularTextDatastore | ImageDatastore | SpreadsheetDatastore | KeyValueDatastore | FileDatastore | TallDatastore | ...`

Datastore for a collection of data, returned as one of these objects: `TabularTextDatastore`, `ImageDatastore`, `SpreadsheetDatastore`, `KeyValueDatastore`, `FileDatastore`, `TallDatastore` or `DatabaseDatastore`. The type of the datastore depends on the type of files or the `location` argument. For more information, click the datastore name in the following table:

Type	Output
Text files	`TabularTextDatastore`
Image files	`ImageDatastore`
Spreadsheet files	`SpreadsheetDatastore`
MAT-files or Sequence files produced by `mapreduce`	`KeyValueDatastore`
Custom format files	`FileDatastore`
MAT-files or Sequence files produced by the `write` function of the `tall` data type.	`TallDatastore`
Database	`DatabaseDatastore`

For each of these datastore types, the `Files` property is a cell array of character vectors. Each character vector is an absolute path to a file resolved by the `location` argument.

See Also

See Also

`fileDatastore` | `imageDatastore` | `imformats` | `javaaddpath` | `mapreduce` | `spreadsheetDatastore` | `tabularTextDatastore` | `tall`

Topics

"Getting Started with Datastore"
"Read Remote Data"

Introduced in R2014b

countEachLabel

Count files in ImageDatastore labels

Syntax

```
T = countEachLabel(imds)
```

Description

`T = countEachLabel(imds)` returns a summary table of the labels in `imds` and the number of files associated with each.

Examples

Label Count

Create an `ImageDatastore` object and label each image according to the folder it is in.

```
imds = imageDatastore(fullfile(matlabroot, 'toolbox', 'matlab', {'demos','imagesci'}),
'LabelSource', 'foldernames', 'FileExtensions', {'.jpg', '.png', '.tif'})
```

```
imds =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\cloudCombined.jpg';
             ' ...\matlab\toolbox\matlab\demos\example.tif';
             ' ...\matlab\toolbox\matlab\demos\landOcean.jpg'
              ... and 5 more
             }
     Labels: [demos; demos; demos ... and 5 more categorical]
    ReadFcn: @readDatastoreImage
```

List the file count for each label.

```
T = countEachLabel(imds)
```

```
T =

     Label      Count
    ________    _____

    demos       6
    imagesci    2
```

Input Arguments

`imds` — Input datastore
`ImageDatastore` object

Input datstore, specified as an `ImageDatastore` object. To create an `ImageDatstore` from your image data, use the `imageDatastore` function.

Output Arguments

`T` — Table of label counts
two-column table

Table of label counts, returned as a two-column table containing the name of each label in `imds` and the number of files associated with each label.

Data Types: `table`

See Also

See Also
`datastore` | `imageDatastore` | `splitEachLabel`

Introduced in R2016a

FileDatastore

Datastore for custom format files

Description

`FileDatastore` objects are associated with large collections of custom format files where the collection does not necessarily fit in memory. You can use the `fileDatastore` function or the `datastore` function to create a `FileDatastore` object. Once the object is created, you can specify `FileDatastore` properties, and use functions that access and manage the data.

Create Object

Create `FileDatastore` objects using the `fileDatastore` function or the `datastore` function.

Properties

`Files` — Files included in datastore

character vector | cell array of character vectors

Files included in the datastore, resolved as a cell array of character vectors, where each character vector is a full path to a file. The `location` argument in the `fileDatastore` and `datastore` functions defines `Files` when the datastore is created.

Example: `{'C:\dir\data\file1.ext';'C:\dir\data\file2.ext'}`

Example: `'hdfs://myserver:7867/data/*.mat'`

Data Types: `char` | `cell`

`ReadFcn` — Function that reads file data

function handle

Function that reads the file data, specified as a function handle. The function must take a file name as input, and then output the corresponding file data. For example, if

`customreader` is the specified function to read the file, then it must have a signature similar to the following:

```
function data = customreader(filename)
...
end
```

If there is more than one output argument, then only the first is used and the rest are ignored.

Example: `@customreader`

Data Types: `function_handle`

Object Functions

hasdata	Determine if data is available to read
numpartitions	Number of partitions
partition	Partition a datastore
preview	Return subset of data from datastore
read	Read data in datastore
readall	Read all data in datastore
reset	Reset datastore to initial state

Examples

Create FileDatastore Object

Create a datastore for files in the MATLAB® `demos` folder that have a `.mat` extension.

```
fds = fileDatastore(fullfile(matlabroot,'toolbox','matlab','demos'),'ReadFcn',@load,'F
```

```
fds =

  FileDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\accidents.mat';
             ' ...\matlab\toolbox\matlab\demos\airfoil.mat';
             ' ...\matlab\toolbox\matlab\demos\airlineResults.mat'
              ... and 35 more
             }
```

```
ReadFcn: @load
```

See Also

See Also

`datastore` | `fileDatastore`

Topics

"Getting Started with Datastore"

Introduced in R2016a

hasdata

Determine if data is available to read

Syntax

```
tf = hasdata(ds)
```

Description

`tf = hasdata(ds)` returns logical `1` (`true`) if there is data available to read from the datastore specified by `ds`. Otherwise, it returns logical `0` (`false`).

Examples

Determine if Data is Available to Read

Create a datastore from the sample file, `mapredout.mat`, which is the output file of the `mapreduce` function.

```
ds = datastore('mapredout.mat');
```

While there is data available in the datastore, read the data.

```
while hasdata(ds)
    T = read(ds);
end
```

Input Arguments

`ds` — Input datastore
datastore

Input datastore. You can use the `datastore` function to create a datastore object from your data.

See Also

See Also

`datastore`

Introduced in R2014b

ImageDatastore

Datastore for image data

Description

An `ImageDatastore` object manages a collection of image files, where each individual image fits in memory, but the entire collection of images does not necessarily fit. To create an `ImageDatastore` object, use either the `imageDatastore` function or the `datastore` function. Once the object is created, you can specify `ImageDatastore` properties using dot notation and use functions that access and manage the data.

For example, you can create an `ImageDatastore` object and specify the `'ReadFcn'` parameter:

```
imds = imageDatastore('peppers.png','ReadFcn',@customreader);
```

Alternatively, you can assign `'ReadFcn'` to `@customreader` after you create the `ImageDatastore`:

```
imds = imageDatastore('peppers.png');
imds.ReadFcn = @customreader;
```

Create Object

Create `ImageDatastore` objects using the `imageDatastore` function or the `datastore` function.

Properties

`Files` — Files included in datastore

character vector | cell array of character vectors

Files included in the datastore, resolved as a character vector or cell array of character vectors. Each character vector is a full path to a file. The `location` argument in the `imageDatastore` and `datastore` functions defines `Files` when the datastore is created.

Example: `{'C:\dir\data\file1.jpg';'C:\dir\data\file2.jpg'}`

Data Types: `char` | `cell`

`ReadSize` — Number of image files to read

1 (default) | positive integer scalar

Number of image files to read in a call to the `read` function, specified as a positive integer scalar. Each call to the `read` function reads at most `ReadSize` images.

`Labels` — File labels

categorical, logical, or numeric vector | cell array of character vectors

File labels, specified as a vector or cell array of label names, with one name for each file in the datastore. The order of the labels in the array corresponds to the order of the associated files in the datastore. If you specify `'LabelSource','foldernames'` when creating the `ImageDatastore` object, then the label name for a file is the name of the folder containing it. If you do not specify `'LabelSource','foldernames'`, then `Labels` is an empty cell array. If you change the `Files` property after the datastore is created, then the `Labels` property is not automatically updated to incorporate the added files.

Data Types: `categorical` | `cell` | `logical` | `double` | `single`

`ReadFcn` — Function that reads image data

`@readDatastoreImage` (default) | function handle

Function that reads image data, specified as a function handle. The function must take an image file name as input, and then output the corresponding image data. For example, if `customreader` is the specified function to read the image data, then it must have a signature similar to the following:

```
function data = customreader(filename)
...
end
```

If there is more than one output argument, then only the first is used and the rest are ignored.

Example: `@customreader`

Data Types: `function_handle`

Object Functions

countEachLabel	Count files in ImageDatastore labels

hasdata	Determine if data is available to read
numpartitions	Number of partitions
partition	Partition a datastore
preview	Return subset of data from datastore
read	Read data in datastore
readall	Read all data in datastore
readimage	Read specified image from datastore
reset	Reset datastore to initial state
shuffle	Shuffle files in ImageDatastore
splitEachLabel	Split ImageDatastore labels by proportions

Examples

Specify Images to Read

Create an `ImageDatastore` object containing four images, and preview the first image.

```
imds = imageDatastore({'street1.jpg','street2.jpg','peppers.png','corn.tif'})
```

```
imds = 

  ImageDatastore with properties:

       Files: {
              ' ...\matlab\toolbox\matlab\demos\street1.jpg';
              ' ...\matlab\toolbox\matlab\demos\street2.jpg';
              ' ...\matlab\toolbox\matlab\imagesci\peppers.png'
               ... and 1 more
              }
    ReadSize: 1
      Labels: {}
     ReadFcn: @readDatastoreImage
```

```
imshow(preview(imds));
```

Read only the second and third images, one at a time.

```
for i = 2:3
    img = readimage(imds,i);
end
```

Read all four images and view the third image.

```
imgs = readall(imds);
imshow(imgs{3})
```

- "Read and Analyze Image Files"
- "Compute Maximum Average HSV of Images with MapReduce"

See Also

See Also

`datastore` | `imageDatastore`

Topics

"Read and Analyze Image Files"

"Compute Maximum Average HSV of Images with MapReduce"
"Getting Started with Datastore"

Introduced in R2015b

KeyValueDatastore

Datastore for key-value pair data

Description

`KeyValueDatastore` objects are associated with files containing key-value pair data that are outputs of or inputs to `mapreduce`. Use the `KeyValueDatastore` properties to specify how you want to access the data. Use dot notation to view or modify a particular property of a `KeyValueDatastore` object:

```
ds = datastore('mapredout.mat');
ds.ReadSize = 20;
```

You also can specify the value of `KeyValueDatastore` properties using name-value pair arguments when you create a datastore using the `datastore` function:

```
ds = datastore('mapredout.mat','ReadSize',20);
```

Create Object

Create `KeyValueDatastore` objects using the `datastore` function.

Properties

`Files` — Files included in datastore

cell array of character vectors

Files included in the datastore, specified as an `n`-by-1 cell array of character vectors, where each character vector is a full path to a file. These are the files defined by the `location` argument to the `datastore` function.

The files must be either MAT-files or Sequence files generated by the `mapreduce` function. The files must be in a local file system or in a network file system. Sequence files also can be in HDFS.

Example: `{'C:\dir\data\file1.mat';'C:\dir\data\file2.mat'}`

`FileType` — File type
`'mat'` (default) | `'seq'`

File type, specified as either `'mat'` for MAT-files or `'seq'` for sequence files. By default, the output of `mapreduce` running against Hadoop® is a datastore containing sequence files. By default, the output of all other `mapreduce` operations is a datastore containing MAT-files.

`ReadSize` — Maximum number of key-value pairs to read
1 (default) | positive integer

Maximum number of key-value pairs to read in a call to the `read` or `preview` functions, specified as a positive integer.

Object Functions

hasdata	Determine if data is available to read
numpartitions	Number of partitions
partition	Partition a datastore
preview	Return subset of data from datastore
read	Read data in datastore
readall	Read all data in datastore
reset	Reset datastore to initial state

Examples

Set Number of Key-Value Pairs to Read

Create a datastore from the sample file, `mapredout.mat`, which is an output file of the `mapreduce` function.

```
ds = datastore('mapredout.mat')
```

```
ds = 

  KeyValueDatastore with properties:

       Files: {
              ' ...\matlab\toolbox\matlab\demos\mapredout.mat'
              }
```

```
    ReadSize: 1 key-value pairs
    FileType: 'mat'
```

Set the `ReadSize` property to `8` so that each call to read reads at most `8` key-value pairs.

```
ds.ReadSize = 8
```

```
ds =

  KeyValueDatastore with properties:

       Files: {
              ' ...\matlab\toolbox\matlab\demos\mapredout.mat'
              }
    ReadSize: 8 key-value pairs
    FileType: 'mat'
```

Read 8 key-value pairs at a time using the `read` function in a `while` loop. The loop executes until there is no more data available to read and `hasdata(ds)` returns `false`.

```
while hasdata(ds)
    T = read(ds);
end
```

Show the last set of key-value pairs read.

```
T
```

```
T =

    Key     Value
    ____    ______

    'OO'    [3090]
    'TZ'    [ 216]
    'XE'    [2357]
    '9E'    [ 521]
    'YV'    [ 849]
```

- “Read and Analyze MAT-File with Key-Value Data”

- "Read and Analyze Hadoop Sequence File"
- "Process Large Set of Images Using MapReduce Framework and Hadoop" (Image Processing Toolbox)

See Also

See Also

`datastore` | `mapreduce`

Topics

"Read and Analyze MAT-File with Key-Value Data"
"Read and Analyze Hadoop Sequence File"
"Process Large Set of Images Using MapReduce Framework and Hadoop" (Image Processing Toolbox)

Introduced in R2014b

numpartitions

Number of partitions

Syntax

```
N = numpartitions(ds)
N = numpartitions(ds,pool)
```

Description

`N = numpartitions(ds)` returns the default number of partitions for datastore `ds`.

`N = numpartitions(ds,pool)` returns a number of partitions to parallelize datastore access over the parallel pool specified by `pool`. To parallelize datastore access, you must have Parallel Computing Toolbox™ installed.

Examples

Number of Partitions

Create a datastore from the sample file, `mapredout.mat`, which is the output file of the `mapreduce` function.

```
ds = datastore('mapredout.mat');
```

Get the default number of partitions.

```
N = numpartitions(ds)
```

```
N = 1
```

By default, there is only one partition in `ds` because it contains only one small file.

Partition the datastore and return the datastore corresponding to the first part.

```
subds = partition(ds,N,1);
```

Read the data in `subds`.

```
while hasdata(subds)
    data = read(subds);
end
```

Number of Partitions for Parallel Datastore Access

Get a number of partitions to parallelize datastore access over the current parallel pool. You must have Parallel Computing Toolbox installed.

Create a datastore from the sample file, `mapredout.mat`, which is the output file of the `mapreduce` function.

```
ds = datastore('mapredout.mat');
```

Get a number of partitions to parallelize datastore access over the current parallel pool.

```
N = numpartitions(ds, gcp);
```

Partition the datastore and read the data in each part.

```
parfor ii=1:N
    subds = partition(ds,N,ii);
    while hasdata(subds)
        data = read(subds);
    end
end
```

- "Partition a Datastore in Parallel" (Parallel Computing Toolbox)

Input Arguments

`ds` — Input datastore
datastore

Input datastore. You can use the `datastore` function to create a datastore object from your data.

`pool` — Parallel pool
parallel pool object

Parallel pool object.

Example: `gcp`

See Also

See Also

`datastore` | `partition`

Topics

"Partition a Datastore in Parallel" (Parallel Computing Toolbox)

Introduced in R2015a

partition

Partition a datastore

Syntax

```
subds = partition(ds,N,index)
```

```
subds = partition(ds,'Files',index)
subds = partition(ds,'Files',filename)
```

Description

`subds = partition(ds,N,index)` partitions datastore `ds` into the number of parts specified by `N` and returns the partition corresponding to the index `index`.

`subds = partition(ds,'Files',index)` partitions the datastore by files and returns the partition corresponding to the file of index `index` in the `Files` property.

`subds = partition(ds,'Files',filename)` partitions the datastore by files and returns the partition corresponding to the file specified by `filename`.

Examples

Partition Datastore into Specific Number of Parts

Create a datastore from the sample file, `airlinesmall.csv`, which contains tabular data.

```
ds = tabularTextDatastore('airlinesmall.csv');
```

Partition the datastore into three parts.

```
subds = partition(ds,3,1)
```

```
subds =

  TabularTextDatastore with properties:

                      Files: {
                             ' ...\matlab\toolbox\matlab\demos\airlinesmall.csv'
                             }
              FileEncoding: 'UTF-8'
         ReadVariableNames: true
             VariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}

  Text Format Properties:
            NumHeaderLines: 0
                 Delimiter: ','
              RowDelimiter: '\r\n'
            TreatAsMissing: ''
              MissingValue: NaN

  Advanced Text Format Properties:
           TextscanFormats: {'%f', '%f', '%f' ... and 26 more}
                  TextType: 'char'
        ExponentCharacters: 'eEdD'
              CommentStyle: ''
                Whitespace: ' \b\t'
    MultipleDelimitersAsOne: false

  Properties that control the table returned by preview, read, readall:
      SelectedVariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
            SelectedFormats: {'%f', '%f', '%f' ... and 26 more}
                   ReadSize: 20000 rows
```

Partition Datastore into Default Number of Parts

Create a datastore from the sample file, `mapredout.mat`, which is the output file of the `mapreduce` function.

```
ds = datastore('mapredout.mat');
```

Get the default number of partitions for `ds`.

```
N = numpartitions(ds);
```

Partition the datastore into the default number of partitions and return the datastore corresponding to the first partition.

```
subds = partition(ds,N,1);
```

Read the data in subds.

```
while hasdata(subds)
 data = read(subds);
end
```

Partition Datastore by Files

Create a datastore that contains three image files.

```
ds = imageDatastore({'street1.jpg','peppers.png','corn.tif'})
```

```
ds = 

  ImageDatastore with properties:

       Files: {
              ' ...\matlab\toolbox\matlab\demos\street1.jpg';
              ' ...\matlab\toolbox\matlab\imagesci\peppers.png';
              ' ...\matlab\toolbox\matlab\imagesci\corn.tif'
              }
    ReadSize: 1
      Labels: {}
     ReadFcn: @readDatastoreImage
```

Partition the datastore by files and return the part corresponding to the second file.

```
subds = partition(ds,'Files',2)
```

```
subds = 

  ImageDatastore with properties:

       Files: {
              ' ...\matlab\toolbox\matlab\imagesci\peppers.png'
              }
    ReadSize: 1
      Labels: {}
     ReadFcn: @readDatastoreImage
```

`subds` contains one file.

Partition Data in Parallel

Create a datastore from the sample file, `mapredout.mat`, which is the output file of the `mapreduce` function.

```
ds = datastore('mapredout.mat');
```

Partition the datastore into three parts on three workers in a parallel pool.

```
N = 3;
p = parpool('local',N);

parfor ii=1:N
    subds = partition(ds,N,ii);
    while hasdata(subds)
        data = read(subds);
    end
end
```

- "Partition a Datastore in Parallel" (Parallel Computing Toolbox)

Input Arguments

`ds` — Input datastore
datastore

Input datastore. You can use the `datastore` function to create a datastore object from your data.

`N` — Number of partitions
positive integer

Number of partitions, specified as a positive integer.

Example: `3`

Data Types: `double`

`index` — Index
positive integer

Index, specified as a positive integer.

Example: `1`

Data Types: `double`

`filename` — file name
character vector

File name, specified as a character vector.

Example: `'file1.csv'`

Example: `'../dir/data/file1.csv'`

Example: `'hdfs://myserver:7867/data/file1.txt'`

Data Types: `char`

Output Arguments

`subds` — Output datastore
datastore

Output datastore. The output datastore is of the same type as the input datastore `ds`.

See Also

See Also
`datastore` | `numpartitions`

Topics
"Partition a Datastore in Parallel" (Parallel Computing Toolbox)

Introduced in R2015a

preview

Return subset of data from datastore

Syntax

```
data = preview(ds)
```

Description

`data = preview(ds)` returns a subset of data from datastore `ds` without changing its current position.

Examples

Preview Data in TabularTextDatastore

Create a datastore from the sample file, `airlinesmall.csv`, which contains tabular data.

```
ds = tabularTextDatastore('airlinesmall.csv','TreatAsMissing','NA');
```

Modify the `SelectedVariableNames` property to specify the variables of interest.

```
ds.SelectedVariableNames = {'DepTime','ArrTime','ActualElapsedTime'};
```

Preview the data for the selected variables.

```
data = preview(ds)
```

```
data = 8×3 table
    DepTime    ArrTime    ActualElapsedTime
    _______    _______    _________________

     642        735        53
    1021       1124        63
    2055       2218        83
    1332       1431        59
```

```
     629         746          77
    1446        1547          61
     928        1052          84
     859        1134         155
```

Preview Data in KeyValueDatastore

Create a datastore from the sample file, `mapredout.mat`, which is the output file of the `mapreduce` function.

```
ds = datastore('mapredout.mat');
```

Preview the data in the datastore.

```
data = preview(ds)
```

```
data = 1×2 table
    Key       Value
    ____    _______

    'AA'    [14930]
```

Input Arguments

`ds` — Input datastore

datastore

Input datastore. You can use the `datastore` function to create a datastore object from your data.

Output Arguments

`data` — Subset of data

table | array of integers

Subset of data, returned as a table or an array of integers.

Type of datastore	Description
`TabularTextDatastore` and `SpreadsheetDatastore`	Table with variables specified by the `SelectedVariableNames` property. The table contains at most eight rows.
`ImageDatastore`	Array of integers corresponding to the first image.
`KeyValueDatastore`	Table with the variables `Key` and `Value`.
`FileDatastore`	Table containing the output returned by the read function, specified by the `'ReadFcn'` parameter in the `fileDatastore` function.

See Also

See Also

`datastore` | `hasdata`

Introduced in R2014b

read

Read data in datastore

Syntax

```
data = read(ds)
[data,info] = read(ds)
```

Description

`data = read(ds)` returns data from a datastore. Subsequent calls to the `read` function continue reading from the endpoint of the previous call.

`[data,info] = read(ds)` also returns information about the extracted data in `info`, including metadata.

Examples

Read Data in TabularTextDatastore

Create a datastore from the sample file, `airlinesmall.csv`, which contains tabular data.

```
ds = tabularTextDatastore('airlinesmall.csv','TreatAsMissing','NA','MissingValue',0);
```

Modify the `SelectedVariableNames` property to specify the variables of interest.

```
ds.SelectedVariableNames = {'DepTime','ArrTime','ActualElapsedTime'};
```

While there is data available to be read from the datastore, read one block of data at a time and analyze the data. In this example, sum the actual elapsed time.

```
sumElapsedTime = 0;
while hasdata(ds)
    T = read(ds);
    sumElapsedTime = sumElapsedTime + sum(T.ActualElapsedTime);
```

```
end
```

View the sum of the actual elapsed time.

```
sumElapsedTime
```

```
sumElapsedTime = 14531797
```

Read Data in KeyValueDatastore

Create a datastore from the sample file, `mapredout.mat`, which is the output file of the `mapreduce` function.

```
ds = datastore('mapredout.mat');
```

Read a subset of data in the datastore.

```
T = read(ds)
```

```
T = 1×2 table
    Key      Value
    ____    _______

    'AA'    [14930]
```

Change the number of key-value pairs to read at a time, by changing the `ReadSize` property of the datastore.

```
ds.ReadSize = 5;
```

Read the next five key-value pairs in the datastore.

```
T = read(ds)
```

```
T = 5×2 table
    Key      Value
    ____    _______

    'AS'    [ 2910]
    'CO'    [ 8138]
    'DL'    [16578]
    'EA'    [  920]
    'HP'    [ 3660]
```

Input Arguments

ds — Input datastore

datastore

Input datastore. You can use the `datastore` function to create a datastore object from your data.

Output Arguments

data — Output data

table

Output data, returned as a table or an array depending on the type of `ds`.

Type of Datastore	Data type of `data`	Description
`TabularTextDatastore` and `SpreadsheetDatastore`	Table	The `SelectedVariableNames` property determines the table variables.
`ImageDatastore`	Integer array	The dimensions of the integer array depend on the type of image: • For grayscale images, `data` is m-by-n. • For truecolor images, `data` is m-by-n-by-3. • For CMYK Tiff images, `data` is m-by-n-by-4. If the `ReadSize` property is greater than 1, then `data` is a cell array of image data corresponding to each image. The

Type of Datastore	Data type of `data`	Description
		`read` function supports all image types supported by the `imread` function. For more information on the supported image types, see `imread`.
`KeyValueDatastore`	Table	The table variable names are `Key` and `Value`.
`FileDatastore`	Varies	The output is the same as the output returned by the custom read function, specified by the `'ReadFcn'` value.

`info` — Information about read data

structure array

Information about read data, returned as a structure array. The structure array can contain the following fields.

Field Name	Datastore Types	Description
`Filename`	All	`Filename` is a fully resolved path containing the path string, name of the file, and file extension. For `ImageDatastore` objects whose `ReadSize` property is greater than 1, `Filename` is a cell array of file names corresponding to each image.
`FileSize`	All	Total file size, in bytes. For MAT-files, `FileSize` is the total number of key-value pairs in the file. For `ImageDatastore` objects whose `ReadSize` property is greater than 1, `FileSize` is a vector of file sizes corresponding to each image.
`FileType`	`KeyValueDatastore` only	The type of file from which data is read, either `'mat'` for MAT-files or `'seq'` for sequence files.

Field Name	Datastore Types	Description
`Label`	`ImageDatastore` only	Image label name. If the `ReadSize` property is greater than 1, then `Label` is a vector of label names corresponding to each image. If the `Labels` property is empty, then `Label` is an empty cell array.
`NumCharactersRead`	`TabularTextDatastor` only	Number of characters read.
`NumDataRows`	`SpreadsheetDatastor` only	Vector containing number of rows read from each sheet.
`Offset`	`KeyValueDatastore` and `TabularTextDatastor` only	Starting position of the read operation, in bytes. For MAT-files, `Offset` is the index of the first key and value read.
`SheetNames`	`SpreadsheetDatastor` only	Names of sheets read.
`SheetNumbers`	`SpreadsheetDatastor` only	Numbering associated with sheets read.

See Also

See Also

`datastore` | `hasdata` | `imread` | `readall`

Introduced in R2014b

readall

Read all data in datastore

Syntax

```
data = readall(ds)
```

Description

`data = readall(ds)` returns all the data in the datastore specified by `ds`.

If all the data in the datastore does not fit in memory, then `readall` returns an error.

Examples

Read All Data in TabularTextDatastore

Create a datastore from the sample file `airlinesmall.csv`, which contains tabular data.

```
ds = tabularTextDatastore('airlinesmall.csv','TreatAsMissing','NA');
```

Modify the `SelectedVariableNames` property to specify the variables of interest.

```
ds.SelectedVariableNames = {'DepTime','ArrTime','ActualElapsedTime'};
```

Read all the data in the datastore.

```
T = readall(ds);
```

`readall` returns all the data in a table.

View information about the table.

```
T.Properties
```

```
ans = struct with fields:
             Description: ''
                UserData: []
```

```
          DimensionNames: {'Row'   'Variables'}
           VariableNames: {'DepTime'   'ArrTime'   'ActualElapsedTime'}
    VariableDescriptions: {}
           VariableUnits: {}
                 RowNames: {}
```

View a summary of the output table.

```
summary(T)
```

```
Variables:

    DepTime: 123523×1 double

        Values:

            Min             1
            Median          1335
            Max             2505
            NumMissing      2351

    ArrTime: 123523×1 double

        Values:

            Min             1
            Median          1522
            Max             2608
            NumMissing      2656

    ActualElapsedTime: 123523×1 double

        Values:

            Min             11
            Median          102
            Max             1650
            NumMissing      2657
```

Read All Data in KeyValueDatastore

Create a datastore from the sample file, `mapredout.mat`, which is the output file of the `mapreduce` function.

```
ds = datastore('mapredout.mat');
```

Read all the data in the datastore.

```
T = readall(ds);
```

View a summary of the output table.

```
summary(T)
```

```
Variables:

    Key: 29×1 cell array of character vectors

    Value: 29×1 cell
```

Input Arguments

ds — Input datastore

datastore

Input datastore. You can use the `datastore` function to create a datastore object from your data.

Output Arguments

data — All data in the datastore

table | cell array

All data in the datastore, returned as a table or cell array.

- For `TabularTextDatastore` and `SpreadsheetDatastore` objects, `data` is a table with variables corresponding to the `SelectedVariableNames` property.
- For `ImageDatastore` objects, `data` is a cell array where each element displays the size and data type of the corresponding image data. For example, `[480x640x3 uint8]` describes the size of `uint8` data corresponding to a color image.
- For `KeyValueDatastore` objects, `data` is a table whose variable names are `Key` and `Value`.

- For `FileDatastore` objects, `data` is a cell array containing the data returned by the read function that is specified by the `'ReadFcn'` parameter value in the `fileDatastore` function.

After the `readall` function returns all the data, it resets `ds` to point to the beginning of the datastore for these objects: `SpreadsheetDatastore`, `KeyValueDatastore`, `TallDatastore`, and `TabularTextDatastore`.

See Also

See Also

`datastore` | `hasdata` | `read`

Introduced in R2014b

readimage

Read specified image from datastore

Syntax

```
img = readimage(imds,I)
[img,fileinfo] = readimage(imds,I)
```

Description

`img = readimage(imds,I)` reads the `I`th image file from the datastore `imds` and returns the image data `img`. The size and data type of the `img` array depends on the image formats of the files in the datastore. The image formats supported by `readimage` function are those formats supported by `imread`. For more information on the supported formats, see `imread`.

`[img,fileinfo] = readimage(imds,I)` also returns a struct `fileinfo` that contains two file information fields:

- `Filename` — Name of the file from which the image is read.
- `FileSize` — Size of the file in bytes.

Examples

Read Specified Image

Create an `ImageDatastore` object containing two images, and then read and view the second image.

```
imds = imageDatastore({'street1.jpg','street2.jpg'});
img = readimage(imds,2);
imshow(img)
```

File Information

Create a datastore object containing two images and read the second image.

```
imds = imageDatastore({'street1.jpg','street2.jpg'});
[img,info] = readimage(imds,2);
```

The `info` structure contains the following information for the second image: `Filename`, `FileSize`, and `Label`. To display the filename and path, type `info.Filename` in the command window. To display the file size, type `info.FileSize`.

Input Arguments

`imds` — Input datastore
`ImageDatastore` object

Input datastore. You can use the `imageDatastore` function or the `datastore` function to create a datastore object from your data.

`I` — Image file index
positive integer

Image file index, specified as a positive integer.

Data Types: `double`

Output Arguments

`img` — Image data
multidimensional array of integers

Image data, returned as a multidimensional array of integers. The size of `img` depends on the image format:

- m-by-n array for grayscale images
- m-by-n-by-3 array for truecolor images
- m-by-n-by-4 array for CMYK Tiff images

The `readimage` function supports the image formats that `imread` supports. For more information on the supported formats, see `imread`.

Data Types: `double`

`fileinfo` — File information
structure array

File information, returned as a structure array containing two fields:

- `Filename` — Name of the file from which the image is read.
- `FileSize` — Size of the file in bytes.

Data Types: `struct`

See Also

See Also

| `datastore` | `imread` | `read` | `readall`

Introduced in R2015b

reset

Reset datastore to initial state

Syntax

```
reset(ds)
```

Description

`reset(ds)` resets the datastore specified by `ds` to the state where no data has been read from it. Resetting allows re-reading from the same datastore.

Examples

Reset Datastore to Initial State

Create a datastore from the sample file, `mapredout.mat`, which is the output file of the `mapreduce` function.

```
ds = datastore('mapredout.mat');
```

Read the first key-value pair.

```
T = read(ds);
```

Reset the datastore to the state where no data has been read from it.

```
reset(ds)
```

Input Arguments

`ds` — Input datastore
datastore

Input datastore. You can use the `datastore` function to create a datastore object from your data.

See Also

See Also

`datastore`

Introduced in R2014b

sheetnames

Query sheet names from datastore

Syntax

```
names = sheetnames(ssds,filename)
names = sheetnames(ssds,I)
```

Description

`names = sheetnames(ssds,filename)` returns the sheet names from a specified file in the datastore `ssds`.

`names = sheetnames(ssds,I)` returns the sheet names from a specified file index.

Examples

Query Sheet Names

Create a datastore containing the file `airlinesubset_small.xlsx`.

```
ssds = spreadsheetDatastore('airlinesmall_subset.xlsx')
```

```
ssds = 

  SpreadsheetDatastore with properties:

                      Files: {
                             ' ...\matlab\toolbox\matlab\demos\airlinesmall_subset.xlsx
                             }
                     Sheets: ''
                      Range: ''

  Sheet Format Properties:
            NumHeaderLines: 0
         ReadVariableNames: true
```

```
              VariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
              VariableTypes: {'double', 'double', 'double' ... and 26 more}

  Properties that control the table returned by preview, read, readall:
      SelectedVariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
      SelectedVariableTypes: {'double', 'double', 'double' ... and 26 more}
                   ReadSize: 'file'
```

Query the sheet names of the first (and only) file in the datastore.

```
sheetnames(ssds,1)
```

```
ans =

  Columns 1 through 7

    '1996'    '1997'    '1998'    '1999'    '2000'    '2001'    '2002'

  Columns 8 through 13

    '2003'    '2004'    '2005'    '2006'    '2007'    '2008'
```

Input Arguments

ssds — Input datastore

SpreadsheetDatastore object

Input datastore, specified as a SpreadsheetDatastore object. Use the spreadsheetDatastore function or the datastore function to create a datastore object from your data.

filename — File in datastore

character vector

File in datastore, specified as a character vector containing the name of the file to query.

Data Types: char

I — File index

positive integer

File index, specified as a positive integer. `I` cannot exceed the number of files in `ssds`.

Data Types: `double`

Output Arguments

`names` — Sheet names
cell array of character vectors

Sheet names, returned as a cell array of character vectors listing the sheet names in the specified file.

Data Types: `cell`

See Also

See Also
`spreadsheetDatastore`

Introduced in R2016a

shuffle

Shuffle files in ImageDatastore

Syntax

```
imdsrand = shuffle(imds)
```

Description

`imdsrand = shuffle(imds)` returns an `ImageDatastore` object containing a random ordering of the files from `imds`.

Examples

Shuffle Files

Create an `ImageDatastore` object `imds`. Shuffle the files to create a new datastore containing the same files in random order.

```
imds = imageDatastore(fullfile(matlabroot, 'toolbox', 'matlab', {'demos','imagesci'}),
```

```
imds =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\cloudCombined.jpg';
             ' ...\matlab\toolbox\matlab\demos\example.tif';
             ' ...\matlab\toolbox\matlab\demos\landOcean.jpg'
              ... and 5 more
             }
     Labels: [demos; demos; demos ... and 5 more categorical]
    ReadFcn: @readDatastoreImage
```

```
imdsrand = shuffle(imds)
```

```
imdsrand =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\street2.jpg';
             ' ...\matlab\toolbox\matlab\demos\landOcean.jpg';
             ' ...\matlab\toolbox\matlab\imagesci\corn.tif'
              ... and 5 more
             }
     Labels: [demos; demos; imagesci ... and 5 more categorical]
    ReadFcn: @readDatastoreImage
```

Input Arguments

`imds` — Input datastore
`ImageDatastore` object

Input datstore, specified as an `ImageDatastore` object. To create an `ImageDatstore` from your image data, use the `imageDatastore` function.

Output Arguments

`imdsrand` — Output datastore
`ImageDatastore` object

Output datastore, returned as an `ImageDatastore` object containing randomly ordered files from `imds`.

See Also

See Also
`datastore` | `imageDatastore`

Introduced in R2016a

splitEachLabel

Split ImageDatastore labels by proportions

Syntax

```
[imds1,imds2] = splitEachLabel(imds,p)
[imds1,...,imdsM] = splitEachLabel(imds,p1,...,pN)
___ = splitEachLabel(___,'randomized')
___ = splitEachLabel(___,Name,Value)
```

Description

`[imds1,imds2] = splitEachLabel(imds,p)` splits the image files in `imds` into two new datastores, `imds1` and `imds2`. The new datastore `imds1` contains the first `p` files from each label and `imds2` contains the remaining files from each label. `p` can be either a number between 0 and 1 indicating the percentage of the files from each label to assign to `imds1`, or an integer indicating the absolute number of files from each label to assign to `imds1`.

`[imds1,...,imdsM] = splitEachLabel(imds,p1,...,pN)` splits the datastore into `N+1` new datastores. The first new datastore `imds1` contains the first `p1` files from each label, the next new datastore `imds2` contains the next `p2` files, and so on. If `p1,...,pN` represent numbers of files, then their sum must be no more than the number of files in the smallest label in the original datastore `imds`.

`___ = splitEachLabel(___,'randomized')` randomly assigns the specified proportion of files from each label to the new datastores.

`___ = splitEachLabel(___,Name,Value)` specifies the properties of the new datastores using one or more name-value pair arguments. For example, you can specify which labels to split with `'Include','labelname'`.

Examples

Split Labels by Percentage

Create an `ImageDatastore` object and label each image according to the name of the folder it is in. The resulting label names are `demos` and `imagesci`.

```
imds = imageDatastore(fullfile(matlabroot, 'toolbox', 'matlab', {'demos','imagesci'}),
'LabelSource', 'foldernames', 'FileExtensions', {'.jpg', '.png', '.tif'});
```

```
imds.Labels
```

```
ans =

     demos
     demos
     demos
     demos
     demos
     demos
     imagesci
     imagesci
```

Create two new datastores from the files in `imds`. The first datastore `imds60` contains the first 60% of files with the `demos` label and the first 60% of files with the `imagesci` label. The second datastore `imds40` contains the remaining 40% of files from each label. If the percentage applied to a label does not result in a whole number of files, `splitEachLabel` rounds down to the nearest whole number.

```
[imds60,imds40] = splitEachLabel(imds,0.6)
```

```
imds60 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\cloudCombined.jpg';
             ' ...\matlab\toolbox\matlab\demos\example.tif';
             ' ...\matlab\toolbox\matlab\demos\landOcean.jpg'
              ... and 2 more
```

```
             }
     Labels: [demos; demos; demos ... and 2 more categorical]
    ReadFcn: @readDatastoreImage


imds40 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\street1.jpg';
             ' ...\matlab\toolbox\matlab\demos\street2.jpg';
             ' ...\matlab\toolbox\matlab\imagesci\peppers.png'
             }
     Labels: [demos; demos; imagesci]
    ReadFcn: @readDatastoreImage
```

Split Labels by Number of Files

Create an `ImageDatastore` object and label each image according to the name of the folder it is in. The resulting label names are `demos` and `imagesci`.

```
imds = imageDatastore(fullfile(matlabroot, 'toolbox', 'matlab', {'demos','imagesci'}),
'LabelSource', 'foldernames', 'FileExtensions', {'.jpg', '.png', '.tif'});
```

```
imds.Labels
```

```
ans =

     demos
     demos
     demos
     demos
     demos
     demos
     imagesci
     imagesci
```

Create two new datastores from the files in `imds`. The first datastore `imds1` contains the first file with the `demos` label and the first file with the `imagesci` label. The second datastore `imds2` contains the remaining files from each label.

```
[imds1,imds2] = splitEachLabel(imds,1)
```

```
imds1 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\cloudCombined.jpg';
             ' ...\matlab\toolbox\matlab\imagesci\corn.tif'
             }
     Labels: [demos; imagesci]
    ReadFcn: @readDatastoreImage


imds2 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\example.tif';
             ' ...\matlab\toolbox\matlab\demos\landOcean.jpg';
             ' ...\matlab\toolbox\matlab\demos\ngc6543a.jpg'
              ... and 3 more
             }
     Labels: [demos; demos; demos ... and 3 more categorical]
    ReadFcn: @readDatastoreImage
```

Split Labels Several Ways by Percentage

Create an `ImageDatastore` object and label each image according to the name of the folder it is in. The resulting label names are `demos` and `imagesci`.

```
imds = imageDatastore(fullfile(matlabroot, 'toolbox', 'matlab', {'demos','imagesci'}),
'LabelSource', 'foldernames', 'FileExtensions', {'.jpg', '.png', '.tif'});
```

```
imds.Labels
```

```
ans =

     demos
     demos
     demos
```

```
     demos
     demos
     demos
     imagesci
     imagesci
```

Create three new datastores from the files in `imds`. The first datastore `imds60` contains the first 60% of files with the `demos` label and the first 60% of files with the `imagesci` label. The second datastore `imds10` contains the next 10% of files from each label. The third datastore `imds30` contains the remaining 30% of files from each label. If the percentage applied to a label does not result in a whole number of files, `splitEachLabel` rounds down to the nearest whole number.

```
[imds60, imds10, imds30] = splitEachLabel(imds,0.6,0.1)
```

```
imds60 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\cloudCombined.jpg';
             ' ...\matlab\toolbox\matlab\demos\example.tif';
             ' ...\matlab\toolbox\matlab\demos\landOcean.jpg'
              ... and 2 more
             }
     Labels: [demos; demos; demos ... and 2 more categorical]
    ReadFcn: @readDatastoreImage


imds10 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\street1.jpg'
             }
     Labels: demos
    ReadFcn: @readDatastoreImage


imds30 =
```

```
  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\street2.jpg';
             ' ...\matlab\toolbox\matlab\imagesci\peppers.png'
             }
     Labels: [demos; imagesci]
    ReadFcn: @readDatastoreImage
```

Split Labels Several Ways by Number of Files

Create an `ImageDatastore` object and label each image according to the name of the folder it is in. The resulting label names are `demos` and `imagesci`.

```
imds = imageDatastore(fullfile(matlabroot, 'toolbox', 'matlab', {'demos','imagesci'}),
'LabelSource', 'foldernames', 'FileExtensions', {'.jpg', '.png', '.tif'});
```

```
imds.Labels
```

```
ans =

     demos
     demos
     demos
     demos
     demos
     demos
     imagesci
     imagesci
```

Create three new datastores from the files in `imds`. The first datastore `imds1` contains the first file with the `demos` label and the first file with the `imagesci` label. The second datastore `imds2` contains the next file from each label. The third datastore `imds3` contains the remaining files from each label.

```
[imds1, imds2, imds3] = splitEachLabel(imds,1,1)
```

```
imds1 =

  ImageDatastore with properties:
```

```
      Files: {
             ' ...\matlab\toolbox\matlab\demos\cloudCombined.jpg';
             ' ...\matlab\toolbox\matlab\imagesci\corn.tif'
             }
     Labels: [demos; imagesci]
    ReadFcn: @readDatastoreImage


imds2 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\example.tif';
             ' ...\matlab\toolbox\matlab\imagesci\peppers.png'
             }
     Labels: [demos; imagesci]
    ReadFcn: @readDatastoreImage


imds3 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\landOcean.jpg';
             ' ...\matlab\toolbox\matlab\demos\ngc6543a.jpg';
             ' ...\matlab\toolbox\matlab\demos\street1.jpg'
              ... and 1 more
             }
     Labels: [demos; demos; demos ... and 1 more categorical]
    ReadFcn: @readDatastoreImage
```

Randomly Split Labels

Create an `ImageDatastore` object and label each image according to the name of the folder it is in. The resulting label names are `demos` and `imagesci`.

```
imds = imageDatastore(fullfile(matlabroot, 'toolbox', 'matlab', {'demos','imagesci'}),
'LabelSource', 'foldernames', 'FileExtensions', {'.jpg', '.png', '.tif'});
```

```
imds.Labels
```

```
ans =

     demos
     demos
     demos
     demos
     demos
     demos
     imagesci
     imagesci
```

Create two new datastores from the files in `imds` by randomly drawing from each label. The first datastore `imds1` contains one random file with the `demos` label and one random file with the `imagesci` label. The second datastore `imds2` contains the remaining files from each label.

```
[imds1, imds2] = splitEachLabel(imds,1,'randomized')
```

```
imds1 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\street2.jpg';
             ' ...\matlab\toolbox\matlab\imagesci\corn.tif'
             }
     Labels: [demos; imagesci]
    ReadFcn: @readDatastoreImage


imds2 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\cloudCombined.jpg';
             ' ...\matlab\toolbox\matlab\demos\example.tif';
             ' ...\matlab\toolbox\matlab\demos\landOcean.jpg'
              ... and 3 more
             }
     Labels: [demos; demos; demos ... and 3 more categorical]
    ReadFcn: @readDatastoreImage
```

Include and Exclude Specified Labels

Create an `ImageDatastore` object and label each image according to the name of the folder it is in. The resulting label names are `demos` and `imagesci`.

```
imds = imageDatastore(fullfile(matlabroot, 'toolbox', 'matlab', {'demos','imagesci'}),
'LabelSource', 'foldernames', 'FileExtensions', {'.jpg', '.png', '.tif'});
```

```
imds.Labels
```

```
ans =

     demos
     demos
     demos
     demos
     demos
     demos
     imagesci
     imagesci
```

Create two new datastores from the files in `imds`, including only the files with the `demos` label. The first datastore `imds60` contains the first 60% of files with the `demos` label and the second datastore `imds40` contains the remaining 40% of files with the `demos` label.

```
[imds60, imds40] = splitEachLabel(imds,0.6,'Include','demos')
```

```
imds60 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\cloudCombined.jpg';
             ' ...\matlab\toolbox\matlab\demos\example.tif';
             ' ...\matlab\toolbox\matlab\demos\landOcean.jpg'
              ... and 1 more
             }
     Labels: [demos; demos; demos ... and 1 more categorical]
    ReadFcn: @readDatastoreImage
```

```
imds40 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\street1.jpg';
             ' ...\matlab\toolbox\matlab\demos\street2.jpg'
             }
     Labels: [demos; demos]
    ReadFcn: @readDatastoreImage
```

Equivalently, you can split only the `demos` label by excluding the `imagesci` label.

```
[imds60, imds40] = splitEachLabel(imds,0.6,'Exclude','imagesci')
```

```
imds60 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\cloudCombined.jpg';
             ' ...\matlab\toolbox\matlab\demos\example.tif';
             ' ...\matlab\toolbox\matlab\demos\landOcean.jpg'
              ... and 1 more
             }
     Labels: [demos; demos; demos ... and 1 more categorical]
    ReadFcn: @readDatastoreImage


imds40 =

  ImageDatastore with properties:

      Files: {
             ' ...\matlab\toolbox\matlab\demos\street1.jpg';
             ' ...\matlab\toolbox\matlab\demos\street2.jpg'
             }
     Labels: [demos; demos]
    ReadFcn: @readDatastoreImage
```

Input Arguments

`imds` — Input datastore

`ImageDatastore` object

Input datastore, specified as an `ImageDatastore` object. To create an `ImageDatstore` from your image data, use the `imageDatastore` function.

`p` — Proportion of files to split

scalar in interval (0,1) | positive integer scalar

Proportion of files to split, specified as a scalar in the interval (0,1) or a positive integer scalar. If `p` is in the interval (0,1), then it represents the percentage of the files from each label to assign to `imds1`. If `p` is an integer, then it represents the absolute number of files from each label to assign to `imds1`. When `p` represents a percentage, if it does not result in a whole number of files, then `splitEachLabel` rounds down to the nearest whole number. When `p` represents a number of files, then there must be at least `p` files associated with each label.

Data Types: `double`

`p1,...,pN` — List of proportions

scalars in interval (0,1) | positive integer scalars

List of proportions, specified as scalars in the interval (0,1) or positive integer scalars. If the proportions are in the interval (0,1), then they represent the percentage of the files from each label to assign to the output datastores. If the proportions are integers, then they indicate the absolute number of files from each label to assign to the output datastores. When the proportions represent percentages, their sum must be no more than 1. When the proportions represent numbers of files, there must be enough files associated with each label to satisfy each proportion.

Data Types: `double`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `[imds1 imds2] = splitEachLabel(imds,0.5,'Exclude','demos')`

`'Include'` — Labels to include
categorical, logical, or numeric vector | cell array of character vectors

Labels to include, specified as the comma-separated pair consisting of `'Include'` and a vector or cell array of label names with the same type as the `Labels` property. Each name must match one of the labels in the `Labels` property of the datastore.

Data Types: `char` | `cell`

`'Exclude'` — Labels to exclude
categorical, logical, or numeric vector | cell array of character vectors

Labels to exclude, specified as the comma-separated pair consisting of `'Exclude'` and a vector or cell array of label names with the same type as the `Labels` property. Each name defines a label associated with the datastore and must match the names in `Labels`. This option cannot be used with the `'Include'` option.

Data Types: `char` | `cell`

Output Arguments

`imds1,imds2` — Output datastores
`ImageDatastore` objects

Output datastores, returned as `ImageDatastore` objects. `imds1` contains the specified proportion of files from each label in `imds`, and `imds2` contains the remaining files.

`imds1,...,imdsM` — List of output datastores
`ImageDatastore` objects

List of output datastores, returned as `ImageDatastore` objects. The number of elements in the list is one more than the number of listed proportions. Each of the new datastores contains the proportion of each label in `imds` defined by `p1,...,pN`. Any files left over are assigned to the Mth datastore.

See Also

See Also

`countEachLabel` | `datastore` | `imageDatastore`

Introduced in R2016a

SpreadsheetDatastore

Datastore for spreadsheet files

Description

`SpreadsheetDatastore` objects are associated with large collections of spreadsheet files where the collection does not necessarily fit in memory. You can use the `spreadsheetDatastore` function or the `datastore` function to create a `SpreadsheetDatastore` object. Once the object is created, you can specify `SpreadsheetDatastore` properties and use functions that access and manage the data.

Create Object

Create `SpreadsheetDatastore` objects using the `spreadsheetDatastore` function or the `datastore` function.

Properties

SpreadsheetDatastore Properties	Access and modify SpreadsheetDatastore properties

Object Functions

hasdata	Determine if data is available to read
numpartitions	Number of partitions
partition	Partition a datastore
preview	Return subset of data from datastore
read	Read data in datastore
readall	Read all data in datastore
reset	Reset datastore to initial state
sheetnames	Query sheet names from datastore

Examples

Read Spreadsheet File

Create a `SpreadsheetDatastore` object containing the file `airlinesmall_subset.xlsx`.

```
ssds = spreadsheetDatastore('airlinesmall_subset.xlsx')
```

```
ssds = 

  SpreadsheetDatastore with properties:

                      Files: {
                             ' ...\matlab\toolbox\matlab\demos\airlinesmall_subset.xlsx
                             }
                     Sheets: ''
                      Range: ''

  Sheet Format Properties:
            NumHeaderLines: 0
         ReadVariableNames: true
             VariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
             VariableTypes: {'double', 'double', 'double' ... and 26 more}

  Properties that control the table returned by preview, read, readall:
      SelectedVariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
      SelectedVariableTypes: {'double', 'double', 'double' ... and 26 more}
                   ReadSize: 'file'
```

Display the sheet names for the file. The file contains one sheet per year.

```
sheetnames(ssds,1)
```

```
ans = 

  Columns 1 through 7

    '1996'    '1997'    '1998'    '1999'    '2000'    '2001'    '2002'

  Columns 8 through 13
```

```
    '2003'    '2004'    '2005'    '2006'    '2007'    '2008'
```

Specify the variable `FlightNum` in the second sheet as the data of interest, and preview the first eight rows.

```
ssds.Sheets = 2;
ssds.SelectedVariableNames = 'FlightNum';
preview(ssds)
```

```
ans =

    FlightNum
    _________

    1014
    1201
     702
    1184
    1310
    1759
    1242
    1558
```

Read only the first three rows of variables `DepTime` and `ArrTime` in the first sheet.

```
ssds.ReadSize = 3;
ssds.Sheets = 1;
ssds.SelectedVariableNames = {'DepTime','ArrTime'};
read(ssds)
```

```
ans =

    DepTime    ArrTime
    _______    _______

    2117       2305
    1252       1511
    1441       1708
```

Read all of sheets four, five, and six.

```
ssds.Sheets = 4:6;
readall(ssds);
```

See Also

See Also

`datastore` | `spreadsheetDatastore`

Topics

"Getting Started with Datastore"

Introduced in R2016a

TabularTextDatastore

Datastore for tabular text files

Description

`TabularTextDatastore` objects are associated with collections of text files containing column-oriented or tabular data. Tabular data is data that is arranged in a rectangular fashion with each row having the same number of entries. To create a `TabularTextDatastore` object, you can use the `tabularTextDatastore` function or the `datastore` function. `TabularTextDatastore` properties specify how data is formatted in the files, and how you want to access the data.

Create Object

Create `TabularTextDatastore` objects using the `tabularTextDatastore` function or the `datastore` function.

Properties

TabularTextDatastore Properties	Access and modify TabularTextDatastore properties

Object Functions

hasdata	Determine if data is available to read
numpartitions	Number of partitions
partition	Partition a datastore
preview	Return subset of data from datastore
read	Read data in datastore
readall	Read all data in datastore
reset	Reset datastore to initial state

Examples

Select Variables to Read

Create a datastore from the sample file `airlinesmall.csv`, which contains tabular data.

```
ds = tabularTextDatastore('airlinesmall.csv','TreatAsMissing','NA');
```

View the variables in the datastore.

```
ds.VariableNames
```

```
ans = 1×29 cell array
    'Year'    'Month'    'DayofMonth'    'DayOfWeek'    'DepTime'    'CRSDepTime'    'A
```

Modify the `SelectedVariableNames` property to specify the variables of interest.

```
ds.SelectedVariableNames = {'Year','Month','Cancelled'};
```

Alternatively, you can specify the variables of interest when you create the datastore.

```
ds = tabularTextDatastore('airlinesmall.csv','TreatAsMissing','NA','SelectedVariableNar
```

Specify Format of Data to Read

Create a datastore from the sample file `airlinesmall.csv`, which contains tabular data.

```
ds = tabularTextDatastore('airlinesmall.csv','TreatAsMissing','NA');
```

Specify the variables of interest.

```
ds.SelectedVariableNames = {'Year','Month','UniqueCarrier'};
```

View the `SelectedFormats` property.

```
ds.SelectedFormats
```

```
ans = 1×3 cell array
    '%f'    '%f'    '%q'
```

The `SelectedFormats` property indicates that the `Year` and `Month` variables will be interpreted as columns of floating-point values, and the `UniqueCarrier` variable will be interpreted as a column of text.

Specify that the first two variables should be read as signed integers, and the third variable should be read as a categorical value by modifying the `SelectedFormats` property.

```
ds.SelectedFormats = {'%d','%d','%C'};
```

Preview the data.

```
T = preview(ds)
```

```
T = 8×3 table
    Year    Month    UniqueCarrier
    ____    _____    _____________

    1987    10       PS
    1987    10       PS
    1987    10       PS
    1987    10       PS
    1987    10       PS
    1987    10       PS
    1987    10       PS
    1987    10       PS
```

- "Read and Analyze Large Tabular Text File"

See Also

See Also

`mapreduce` | `textscan`

Topics

"Read and Analyze Large Tabular Text File"
"Getting Started with Datastore"

Introduced in R2014b

TallDatastore

Datastore for checkpointing `tall` arrays

Description

`TallDatastore` objects are for recreating `tall` arrays from binary files written to disk by the `write` function. You can use the object to recreate the original `tall` array, or you can access and manage the data by specifying `TallDataStore` properties and using the object functions.

Create Object

Create `TallDatastore` objects using the `datastore` function. For example, `tds = datastore(location,'Type','tall')` creates a datastore from a collection of files specified by `location`.

Properties

`Files` — Files included in datastore

character vector | cell array of character vectors

Files included in the datastore, resolved as character vector or a cell array of character vectors, where each character vector is a full path to a file. The `location` argument of the `datastore` function defines the `Files` property when the datastore is created.

The files must be either MAT-files or Sequence files generated by the `write` function.

Example: `{'C:\dir\data\file1.ext';'C:\dir\data\file2.ext'}`

Data Types: `char` | `cell`

`FileType` — File type

`'mat'` | `'seq'`

File type, specified as either `'mat'` for MAT-files or `'seq'` for sequence files. By default, the type of file in the provided location determines the `FileType`.

`ReadSize` — Maximum number of data rows to read

positive integer

Maximum number of data rows to read in a call to the `read` or `preview` functions, specified as a positive integer. When the `datastore` function creates a `TallDatastore`, it determines and assigns the best possible value for `ReadSize`.

Object Functions

hasdata	Determine if data is available to read
numpartitions	Number of partitions
partition	Partition a datastore
preview	Return subset of data from datastore
read	Read data in datastore
readall	Read all data in datastore
reset	Reset datastore to initial state

Examples

Recreate `tall` Arrays from Files Saved Using `write` Function

Use `TallDatastore` objects to reconstruct tall arrays directly from files on disk rather than re-executing all of the commands that produced the tall array. Create a tall array and save it to disk using `write` function. Retrieve the `tall` array using `datastore` and then convert it back to `tall`.

Create a simple tall double.

```
t = tall(rand(500,1))
```

```
t =

  500×1 tall double column vector

    0.8147
    0.9058
    0.1270
    0.9134
    0.6324
    0.0975
    0.2785
```

```
    0.5469
    :
    :
```

Save the results to a new folder named `ExampleData` on the `C:\` disk. (You might want to specify a different write location, especially if you are not using a Windows® computer.)

```
location = 'C:\ExampleData';
write(location, t);
```

```
Writing tall data to folder C:\ExampleData
Evaluating tall expression using the Parallel Pool 'local':
Evaluation completed in 0 sec
```

To recover the `tall` array that was written to disk, first create a new datastore that references the same directory. Then convert the datastore into a `tall` array.

```
tds = datastore(location);
t1 = tall(tds)
```

```
t1 =

  M×1 tall double column vector

    0.8147
    0.9058
    0.1270
    0.9134
    0.6324
    0.0975
    0.2785
    0.5469
    :
    :
```

See Also

See Also

`datastore` | `write`

Introduced in R2016b

datatipinfo

Produce short description of input variable

Syntax

```
datatipinfo(var)
```

Description

`datatipinfo(var)` displays a short description of a variable, similar to what is displayed in a data tip when debugging a MATLAB program. See "View Variable Value" for an example of a data tip.

Examples

Get datatip information for a 5-by-5 matrix:

```
A = rand(5);

datatipinfo(A)
A: 5x5 double =
    0.4445    0.3567    0.7458    0.0767    0.4400
    0.7962    0.6575    0.3918    0.8289    0.9746
    0.5641    0.9808    0.0265    0.4838    0.6722
    0.9099    0.9653    0.2508    0.4859    0.4054
    0.2857    0.5198    0.7383    0.9301    0.9604
```

Get datatip information for a 50-by-50 matrix. For this larger matrix, `datatipinfo` displays just the size and data type:

```
A = rand(50);

datatipinfo(A)
A: 50x50 double
```

Also for multidimensional matrices, `datatipinfo` displays just the size and data type:

```
A = rand(5);
A(:,:,2) = A(:,:,1);

datatipinfo(A)
A: 5x5x2 double
```

See Also

inputname | nargin | narginchk | varargin | inputParser

Introduced before R2006a

date

Current date string

Syntax

```
str = date
```

Description

`str = date` returns a character vector containing the date in the format, day-month-year, for example, `01-Jan-2014`.

Tips

- To return a datetime scalar representing the current date, type:

  ```
  d = datetime('today')
  ```

See Also

`clock` | `datestr` | `datetime` | `datenum` | `now`

Introduced before R2006a

datenum

Convert date and time to serial date number

The `datenum` function creates a numeric array that represents each point in time as the number of days from January 0, 0000. The numeric values also can represent elapsed time in units of days. However, the best way to represent points in time is by using the `datetime` data type. The best way to represent elapsed time is by using the `duration` or `calendarDuration` data types.

Syntax

```
DateNumber = datenum(t)
```

```
DateNumber = datenum(DateString)
DateNumber = datenum(DateString,formatIn)
DateNumber = datenum(DateString,PivotYear)
DateNumber = datenum(DateString,formatIn,PivotYear)
```

```
DateNumber = datenum(DateVector)
DateNumber = datenum(Y,M,D)
DateNumber = datenum(Y,M,D,H,MN,S)
```

Description

`DateNumber = datenum(t)` converts the datetime values in `datetime` array `t` to serial date numbers.

A serial date number represents the whole and fractional number of days from a fixed, preset date (January 0, 0000) in the proleptic ISO calendar.

`DateNumber = datenum(DateString)` converts text representing dates and times to serial date numbers. If the format used in the text is known, specify the format as `formatIn`. Syntaxes without `formatIn` are significantly slower than syntaxes that include it.

`DateNumber = datenum(DateString,formatIn)` uses `formatIn` to interpret the dates and times represented by `DateString`.

`DateNumber = datenum(DateString,PivotYear)` uses `PivotYear` to interpret text that specifies the year as two characters. If the format used in the text is known, specify the format as `formatIn`. Syntaxes without `formatIn` are significantly slower than syntaxes that include it.

`DateNumber = datenum(DateString,formatIn,PivotYear)` uses `formatIn` to interpret the dates and times represented by `DateString`, and `PivotYear` to interpret text that specifies the year as two characters. You can specify `formatIn` and `PivotYear` in either order.

`DateNumber = datenum(DateVector)` converts date vectors to serial date numbers, and returns a column vector of `m` date numbers, where `m` is the total number of date vectors in `DateVector`.

`DateNumber = datenum(Y,M,D)` returns the serial date numbers for corresponding elements of the `Y`, `M`, and `D` (year, month, day) arrays. The arrays must be of the same size (or any can be a scalar). You also can specify the input arguments as a date vector, `[Y,M,D]`.

`DateNumber = datenum(Y,M,D,H,MN,S)` additionally returns the serial date numbers for corresponding elements of the `H`, `MN`, and `S` (hour, minute, and second) arrays. The arrays must be of the same size (or any can be a scalar). You also can specify the input arguments as a date vector, `[Y,M,D,H,MN,S]`.

Examples

Convert datetime Array to Date Numbers

```
format long
```

```
t = [datetime('now');datetime('tomorrow')]
```

```
t = 2×1 datetime array
   24-Feb-2017 12:45:11
   25-Feb-2017 00:00:00
```

```
DateNumber = datenum(t)
```

```
DateNumber =
   1.0e+05 *
```

```
   7.367505313810416
   7.367510000000000
```

Convert Text Representing Date to Date Number

```
DateString = '19-May-2001';
formatIn = 'dd-mmm-yyyy';
datenum(DateString,formatIn)
```

```
ans = 730990
```

`datenum` returns a date number for text representing a date with the format `'dd-mmm-yyyy'`.

Convert Text with Multiple Dates to Date Numbers

Pass several dates as character vectors in a cell array. All input dates must use the same format.

```
DateString = {'09/16/2007';'05/14/1996';'11/29/2010'};
formatIn = 'mm/dd/yyyy';
datenum(DateString,formatIn)
```

```
ans =

      733301
      729159
      734471
```

Convert Text Representing Date to Date Number Using Pivot Year

Convert text representing a date to a serial date number using the default pivot year.

```
n = datenum('12-jun-17','dd-mmm-yy')
```

```
n = 736858
```

The text that represents this date number is `'12-Jun-2017'`.

Convert the same text to a serial date number using 1400 as the pivot year.

```
n = datenum('12-jun-17','dd-mmm-yy',1400)
```

```
n = 517712
```

The text that represents this date number is `'12-Jun-1417'`.

Convert Date Vector to Date Number

```
datenum([2009,4,2,11,7,18])
```

```
ans = 7.3387e+05
```

Convert Year, Month, and Day to Date Number

Convert a date specified by year, month and day values to a serial date number.

```
n = datenum(2001,12,19)
```

```
n = 731204
```

Input Arguments

`t` — `datetime` values
scalar | vector | matrix | multidimensional array

`datetime` values, specified as a scalar, vector, matrix, or multidimensional `datetime` array. `datenum` does not account for time zone information in `t` and does not adjust datetime values that occur during Daylight Saving Time. That is, `datenum` treats the `TimeZone` property of `t` as empty and converts the remaining date and time information to a serial date number.

`DateVector` — Date vectors
matrix

Date vectors, specified as an `m`-by-6 or `m`-by-3 matrix containing `m` full or partial date vectors, respectively. A full date vector has six elements, specifying year, month, day,

hour, minute, and second, in that order. A partial date vector has three elements, specifying year, month, and day, in that order. Each element of `DateVector` should be a positive or negative integer value except for the seconds element, which can be fractional. If an element falls outside the conventional range, `datenum` adjusts both that date vector element and the previous element. For example, if the minutes element is `70`, `datenum` adjusts the hours element by `1` and sets the minutes element to `10`. If the minutes element is `-15`, then `datevec` decreases the hours element by `1` and sets the minutes element to `45`. Month values are an exception. `datenum` sets month values less than `1` to `1`.

Example: `[2003,10,24,12,45,07]`

Data Types: `double`

`DateString` — Text representing dates and times

character array | 1–D cell array of character vectors

Text representing dates and times, specified as a character array where each row contains text representing one point in time, or as a one dimensional cell array of character vectors. All rows of a character array, or all elements of a cell array, must have the same format.

Example: `'24–Oct-2003 12:45:07'`

Example: `['19-Sep-2013';'20-Sep-2013';'21-Sep-2013']`

Example: `{'15-Oct-2010' '20-Nov-2012'}`

If the format used in the text is known, you should also specify `formatIn`. If you do not specify `formatIn`, `DateString` must be in one of the following formats.

Format of Text Representing Dates and Times	Example
`'dd-mmm-yyyy HH:MM:SS'`	`01-Mar-2000 15:45:17`
`'dd-mmm-yyyy'`	`01-Mar-2000`
`'mm/dd/yyyy'`	`03/01/2000`
`'mm/dd/yy'`	`03/01/00`
`'mm/dd'`	`03/01`
`'mmm.dd,yyyy HH:MM:SS'`	`Mar.01,2000 15:45:17`
`'mmm.dd,yyyy'`	`Mar.01,2000`

Format of Text Representing Dates and Times	Example
'yyyy-mm-dd HH:MM:SS'	2000-03-01 15:45:17
'yyyy-mm-dd'	2000-03-01
'yyyy/mm/dd'	2000/03/01
'HH:MM:SS'	15:45:17
'HH:MM:SS PM'	3:45:17 PM
'HH:MM'	15:45
'HH:MM PM'	3:45 PM

Note: The symbolic identifiers describing date and time formats are different from those that describe the display formats of `datetime` arrays.

Certain formats might not contain enough information to convert text representations of dates and times. In those cases, hours, minutes, and seconds default to 0, days default to 1, months default to January, and years default to the current year. `datevec` and `datenum` consider two-character years (e.g., `'79'`) to fall within the 100-year range centered around the current year.

When you do not specify `formatIn`, note the following:

- For the formats that specify the month as two digits (`mm`), the month value must not be greater than 12.
- However, for the format `'mm/dd/yy'`, if the first entry in the text is greater than 12 and the second entry is less than or equal to 12, then `datenum` considers the text to be in `'yy/mm/dd'` format.

`formatIn` — Format of input text representing dates and times

character vector

Format of the input text representing dates and times, specified as a character vector of symbolic identifiers.

Example: `'dddd, mmm dd, yyyy'`

The following table shows symbolic identifiers that you can use to construct the `formatIn` character vector. You can include characters such as a hyphen, space, or colon to separate the fields.

Note: The symbolic identifiers describing date and time formats are different from the identifiers that describe the display formats of `datetime` arrays.

Symbolic Identifier	Description	Example
`yyyy`	Year in full	`1990`, `2002`
`yy`	Year in two digits	`90`, `02`
`QQ`	Quarter year using letter `Q` and one digit	`Q1`
`mmmm`	Month using full name	`March`, `December`
`mmm`	Month using first three letters	`Mar`, `Dec`
`mm`	Month in two digits	`03`, `12`
`m`	Month using capitalized first letter	`M`, `D`
`dddd`	Day using full name	`Monday`, `Tuesday`
`ddd`	Day using first three letters	`Mon`, `Tue`
`dd`	Day in two digits	`05`, `20`
`d`	Day using capitalized first letter	`M`, `T`
`HH`	Hour in two digits (no leading zeros when symbolic identifier `AM` or `PM` is used)	`05`, `5 AM`
`MM`	Minute in two digits	`12`, `02`
`SS`	Second in two digits	`07`, `59`
`FFF`	Millisecond in three digits	`057`
`AM or PM`	`AM` or `PM` inserted in text representing time	`3:45:02 PM`

The `formatIn` value must follow these guidelines:

- You cannot specify any field more than once. For example, you cannot use `'yy-mmm-dd-m'` because it has two month identifiers. The one exception to this is that you can combine one instance of `dd` with one instance of any of the other day identifiers. For example, `'dddd mmm dd yyyy'` is a valid input.
- When you use `AM` or `PM`, the `HH` field is also required.

- You only can use QQ alone or with a year specifier.

PivotYear — Start year of 100-year date range
present minus 50 years (default) | integer

Start year of the 100-year date range in which a two-character year resides, specified as an integer. Use a pivot year to interpret dates that specify the year as two characters.

If formatIn contains the time of day, the pivot year is computed from the current time of the current day, month, and year. Otherwise it is computed from midnight of the current day, month, and year.

Example: 2000

Note: If the input date format specifies a four-character year, then the last two characters are truncated, and the *first* two characters specify the year. For example, if the date and pivot year are specified as ('25122015','ddmmyyyy',2000), then the resulting date is 25-12-2020, not 25-12-2015.

Data Types: double

Y,M,D — Year, month, and day arrays
scalar | vector | matrix | array

Year, month, and day arrays specified as a scalar, vector, matrix, or array. These must be the same size, or any one can be a scalar. Y,M,D should be integer values.

If Y,M,D are all scalars or all column vectors, you can specify the input arguments as a date vector, [Y,M,D].

Example: 2003,10,24

Data Types: double

Y,M,D,H,MN,S — Year, month, day, hour, minute, and second arrays
scalar | vector | matrix | array

Year, month, day, hour, minute, and second arrays specified as a scalar, vector, matrix, or array. These must be the same size, or any one can be a scalar. datenum does not accept milliseconds as a separate input, but as a fractional part of the seconds input, S. Y,M,D,H,MN should be integer values.

If `Y,M,D,H,MN,S` are all scalars or all column vectors, you can specify the input arguments as a date vector `[Y,M,D,H,MN,S]`.

Example: `2003,10,24,12,45,07.451`

Data Types: `double`

Output Arguments

`DateNumber` — Serial date numbers
scalar | vector

Serial date numbers, returned as a column vector of length `m`, where `m` is the total number of input date vectors or character vectors representing dates and times.

Tips

- To create arbitrarily shaped output, use the `datenum(Y,M,D)` and `datenum(Y,M,D,H,MN,S)` syntaxes. The `datenum(DateVector)` syntax creates only a column vector of date numbers.

```
datenum(2013,[1 3; 2 4],ones(2,2))
```

```
ans =

      735235      735294
      735266      735325
```

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`datestr` | `datetime` | `datevec`

Topics

"Represent Dates and Times in MATLAB"
"Carryover in Date Vectors and Strings"

Introduced before R2006a

dateshift

Shift date or generate sequence of dates and time

Syntax

```
t2 = dateshift(t,'start',unit)
t2 = dateshift(t,'end',unit)
t2 = dateshift(t,'dayofweek',dow)
```

```
t2 = dateshift( ___ ,rule)
```

Description

`t2 = dateshift(t,'start',unit)` shifts each value in the `datetime` array `t` back to the beginning of the unit of time specified by `unit`. The output `t2` is the same size as `t`.

`t2 = dateshift(t,'end',unit)` shifts the values ahead to the end of the unit of time specified by `unit`. The end of a day, hour, minute, or second is also the beginning of the next one. For example, the end of a day occurs at midnight at the beginning of the next day. The end of a year, quarter, month, or week is midnight at the beginning of the last day of that time period.

`t2 = dateshift(t,'dayofweek',dow)` returns the next occurrence of the specified day of the week on or after each datetime in array `t`. If the date in `t` falls on the specified day of the week, then `dateshift` returns the same date.

`t2 = dateshift( ___ ,rule)` shifts each value in array `t` according to the pattern specified by `rule`. You can use this syntax with any of the arguments in the previous syntaxes.

Examples

Shift Current Date to End of Current Month

Define the current date.

```
t = datetime('today')
```

```
t = datetime
   24-Feb-2017
```

Shift the date to the end of the same month.

```
t2 = dateshift(t,'end','month')
```

```
t2 = datetime
   28-Feb-2017
```

Shift Current Date to Next Month

Define the current date.

```
t = datetime('today')
```

```
t = datetime
   24-Feb-2017
```

Shift the date to the start of the next month.

```
t2 = dateshift(t,'start','month','next')
```

```
t2 = datetime
   01-Mar-2017
```

Shift the date to the end of the next month.

```
t2 = dateshift(t,'end','month','next')
```

```
t2 = datetime
   31-Mar-2017
```

Shift Dates to Specific Day of Week

Shift an array of dates forward to the next Friday.

```
t = datetime([2014,08,03;2014,04,15])
```

```
t = 2×1 datetime array
   03-Aug-2014
   15-Apr-2014
```

```
t2 = dateshift(t,'dayofweek','Friday')
```

```
t2 = 2×1 datetime array
   08-Aug-2014
   18-Apr-2014
```

Shift the array of dates backward to the previous Monday.

```
t2 = dateshift(t,'dayofweek','Monday','previous')
```

```
t2 = 2×1 datetime array
   28-Jul-2014
   14-Apr-2014
```

Determine Future Date

Find the date that falls at the end of the fifth week from today.

```
t = datetime('today')
```

```
t = datetime
   24-Feb-2017
```

```
t2 = dateshift(t,'end','week',5)
```

```
t2 = datetime
   01-Apr-2017
```

Create Sequence of Dates Falling on Specific Day of Week

Generate a sequence of dates consisting of the next three occurrences of Friday.

```
t = datetime('today')
```

```
t = datetime
```

```
   24-Feb-2017
```

```
t2 = dateshift(t,'dayofweek','Friday',1:3)
```

```
t2 = 1×3 datetime array
   24-Feb-2017   03-Mar-2017   10-Mar-2017
```

Input Arguments

t — Input date and time

datetime array

Input date and time, specified as a `datetime` array.

unit — Unit of time

'year' | 'quarter' | 'month' | 'week' | 'day' | 'hour' | 'minute' | 'second'

Unit of time, specified as one of the following character vectors:

- 'year'
- 'quarter'
- 'month'
- 'week'
- 'day'
- 'hour'
- 'minute'
- 'second'

dow — Day of Week

scalar integer | character vector

Day of the week, specified as a scalar integer indicating the day of week number, or a character vector containing a localized day name.

Example: 'Sunday'

Example: 1

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char`

`rule` — Rule for shifting datetime values

character vector | scalar integer | array of integer values

Rule for shifting datetime values, specified as a character vector, scalar integer, or an array of integer values. If `rule` is a character vector, it must be one of the following.

Value of `rule`	Description
`'next'`	Shift datetime to next unit of time or specified day. (Default rule for day of week.)
`'previous'`	Shift datetime to previous unit of time or specified day.
`'nearest'`	Shift datetime to nearest occurrence of unit of time or specified day.
`'current'`	Shift datetime within the current unit of time, or to the specified day in the current week. (Default rule for unit of time.)

If `rule` is an integer or an array of integers, then:

- When used with the input argument, `unit`, `0` corresponds to the start or end of the current unit for each datetime, `1` corresponds to the next unit, `-1` corresponds to the previous unit, and so on.
- When used with the input argument, `dow`, `0` corresponds to the specified day in the current week for each datetime, `1` corresponds to the next occurrence of the specified day, `-1` corresponds to the previous occurrence, and so on.
- `t` and `rule` must be the same size, or one must be a scalar.

If you specify `'dayofweek'` and `t` contains datetime values that fall on that day of the week, then `dateshift` treats those datetime values as the next or previous occurrences of the specified day of the week. For example, `dateshift(datetime(2015,12,24),'dayofweek','thu',rule)` returns a datetime value with a date of December 24, 2015 if `rule` is `'next'`, `'previous'`, `1`, or `-1`, because December 24, 2015 is a Thursday.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`between` | `colon`

Introduced in R2014b

datestr

Convert date and time to string format

The `datestr` function creates a character array that display one or more points in time. However, the best way to represent points in time is by using the `datetime` data type.

Syntax

```
DateString = datestr(t)
DateString = datestr(DateVector)
DateString = datestr(DateNumber)

DateString = datestr( ___ ,formatOut)

DateString = datestr(DateStringIn)
DateString = datestr(DateStringIn,formatOut,PivotYear)

DateString = datestr( ___ ,'local')
```

Description

`DateString = datestr(t)` converts the datetime values in `datetime` array `t` to text representing dates and times. `datestr` returns a character array with `m` rows, where `m` is the total number of datetime values in `t`.

By default, `datestr` returns text in the format, day-month-year hour:minute:second. If hour:minute:second `= 00:00:00`, then the text returned has the format, day-month-year.

`DateString = datestr(DateVector)` converts date vectors to text representing dates and times. `datestr` returns a character array with `m` rows, where `m` is the total number of date vectors in `DateVector`.

`DateString = datestr(DateNumber)` converts serial date numbers to text representing dates and times. `datestr` returns a character array with `m` rows, where `m` is the total number of date numbers in `DateNumber`.

`DateString = datestr( ___ ,formatOut)` specifies the format of the output text using `formatOut`. You can use `formatOut` with any of the input arguments in the above syntaxes.

`DateString = datestr(DateStringIn)` converts `DateStringIn` to text in the format, day-month-year hour:minute:second. All dates and times represented in `DateStringIn` must have the same format.

`DateString = datestr(DateStringIn,formatOut,PivotYear)` converts `DateStringIn` to `DateString`, in the format specified by `formatOut`, and using optional `PivotYear` to interpret dates that specify the year as two characters.

`DateString = datestr( ___ ,'local')` returns the date in the language of the current locale. This is the language you select by means of your computer's operating system. If you leave `local` out of the argument list, `datestr` returns text in the default language, which is US English. Use `local` with any of the previous syntaxes. The `local` argument must be last in the argument sequence.

Examples

Convert datetime Array to Date Strings

```
t = [datetime('now');datetime('tomorrow')]
```

```
t = 2×1 datetime array
   24-Feb-2017 13:20:09
   25-Feb-2017 00:00:00
```

```
DateString = datestr(t)
```

```
DateString = 2×20 char array
    '24-Feb-2017 13:20:09'
    '25-Feb-2017 00:00:00'
```

`datestr` returns text representing the dates and times in the format, day-month-year hour:minute:second.

Convert Date Vector to Text

```
DateVector = [2009,4,2,11,7,18];
```

```
datestr(DateVector)
```

```
ans =
'02-Apr-2009 11:07:18'
```

`datestr` returns text representing the date and time in the default format.

Convert Date and Time to Specific Format

Format the current date in the `mm/dd/yy` format.

You can specify this format using symbolic identifiers.

```
formatOut = 'mm/dd/yy';
datestr(now,formatOut)
```

```
ans =
'02/24/17'
```

Alternatively, you can specify this format using a numeric identifier.

```
formatOut = 2;
datestr(now,formatOut)
```

```
ans =
'02/24/17'
```

You can reformat the date and time, and also show milliseconds.

```
dt = datestr(now,'mmmm dd, yyyy HH:MM:SS.FFF AM')
```

```
dt =
'February 24, 2017  1:58:36.211 PM'
```

Convert 12-Hour Time String to 24-Hour Equivalent

Convert the 12-hour time 05:32 p.m. to its 24-hour equivalent.

```
datestr('05:32 PM','HH:MM')
```

```
ans =
```

```
'17:32'
```

Convert the 24-hour time 05:32 to its 12-hour equivalent.

```
datestr('05:32','HH:MM PM')
```

```
ans =
' 5:32 AM'
```

The use of AM or PM in the `formatOut` output text does not influence which characters actually become part of the text; they only determine whether or not to include the characters. MATLAB® selects AM or PM based on the time entered.

Convert Date String from Custom Format

Call `datenum` inside of `datestr` to specify the format of the input text representing a date.

```
formatOut = 'dd mmm yyyy';
datestr(datenum('16-04-55','dd-mm-yy',1900),formatOut)
```

```
ans =
'16 Apr 1955'
```

Convert Multiple Date Strings

Convert multiple character vectors representing dates by passing them in a cell array.

All input dates must use the same format. For example, the following command passes three dates that all use the `mm/dd/yyyy` format.

```
datestr(datenum({'09/16/2007';'05/14/1996';'11/29/2010'}, ...
    'mm/dd/yyyy'))
```

```
ans = 3×11 char array
    '16-Sep-2007'
    '14-May-1996'
    '29-Nov-2010'
```

`datestr` returns a character array of converted dates in the format, day-month-year.

Convert Date String with Values Outside Normal Range

Call `datenum` inside of `datestr` to return the expected value, because the date below uses a value outside its normal range (month=13).

```
datestr(datenum('13/24/88','mm/dd/yy'))
```

```
ans =
'24-Jan-1989'
```

Use Pivot Year

Change the pivot year to change the year range.

Use a pivot year of 1900.

```
DateStringIn = '4/16/55';
formatOut = 1;
PivotYear = 1900;
datestr(DateStringIn,formatOut,PivotYear)
```

```
ans =
'16-Apr-1955'
```

For the same date, use a pivot year of 2000.

```
PivotYear = 2000;
datestr(DateStringIn,formatOut,PivotYear)
```

```
ans =
'16-Apr-2055'
```

Return Date String in Local Language

Convert a date number to text in the language of the current locale.

Use the `local` argument in a French locale.

```
DateNumber = 725935;
formatOut = 'mmmm-dd-yyyy';
str = datestr(DateNumber,formatOut,'local')
```

```
str =
Juillet-17-1987
```

You can make the same call without specifying `'local'`.

```
str = datestr(DateNumber,formatOut)
```

```
str =
July-17-1987
```

In this case, the output defaults to the English language.

Input Arguments

`t` — `datetime` values

scalar | vector | matrix | multidimensional array

`datetime` values, specified as a scalar, vector, matrix, or multidimensional `datetime` array.

`DateVector` — Date vectors

matrix

Date vectors, specified as an `m`-by-6 matrix, where `m` is the number of full (six-element) date vectors. Each element of `DateVector` should be a positive or negative integer value with the exception of the seconds element, which can be fractional. If an element falls outside the conventional range, `datestr` adjusts both that date vector element and the previous element. For example, if the minutes element is `70`, `datestr` adjusts the hours element by `1` and sets the minutes element to `10`. If the minutes element is `-15`, then `datestr` decreases the hours element by `1` and sets the minutes element to `45`. Month values are an exception. `datestr` sets month values less than `1` to `1`.

Example: `[2003,10,24,12,45,07]`

Data Types: `double`

`DateNumber` — Serial date numbers

scalar | vector | matrix | array

Serial date numbers, specified as a scalar, vector, matrix, or array of positive double-precision numbers.

Example: `731878`

Data Types: `double`

`formatOut` — Format of the output representing dates and times

`-1` (default) | character vector | integer

Format of the output representing dates and times, specified as a character vector of symbolic identifiers or an integer that corresponds to a predefined format. If you do not specify `formatOut`, then `datestr` returns text in the default format `dd-mmm-yyyy HH:MM:SS` (day-month-year hour:minute:second). By default, if `HH:MM:SS = 00:00:00` then the text returned has the format `dd-mmm-yyyy`.

The following table shows symbolic identifiers you can use to construct the `formatOut` character vector. You can include characters such as a hyphen, space, or colon to separate the fields.

Note: The symbolic identifiers describing date and time formats are different from those that describe the display formats of `datetime` arrays.

Symbolic Identifier	Description	Example
`yyyy`	Year in full	`1990`, `2002`
`yy`	Year in two digits	`90`, `02`
`QQ`	Quarter year using letter `Q` and one digit	`Q1`
`mmmm`	Month using full name	`March`, `December`
`mmm`	Month using first three letters	`Mar`, `Dec`
`mm`	Month in two digits	`03`, `12`
`m`	Month using capitalized first letter	`M`, `D`
`dddd`	Day using full name	`Monday`, `Tuesday`
`ddd`	Day using first three letters	`Mon`, `Tue`
`dd`	Day in two digits	`05`, `20`
`d`	Day using capitalized first letter	`M`, `T`
`HH`	Hour in two digits	`05`, `5 AM`

Symbolic Identifier	Description	Example
	(no leading zeros when symbolic identifier AM or PM is used)	
MM	Minute in two digits	12, 02
SS	Second in two digits	07, 59
FFF	Millisecond in three digits	057
AM or PM	AM or PM inserted in text representing time	3:45:02 PM

The formatOut character vector must follow these guidelines:

- You cannot specify any field more than once. For example, you cannot use 'yy-mmm-dd-m' because it has two month identifiers. The one exception to this is that you can combine one instance of dd with one instance of any of the other day identifiers. For example, 'dddd mmm dd yyyy' is a valid input.
- When you use AM or PM, the HH field is also required.
- You only can use QQ alone or with a year specifier.

This table lists predefined date formats that you can use with datestr.

Numeric Identifier	Date and Time Format	Example
-1 (default)	'dd-mmm-yyyy HH:MM:SS' or 'dd-mmm-yyyy' if 'HH:MM:SS'= 00:00:00	01-Mar-2000 15:45:17 or 01-Mar-2000
0	'dd-mmm-yyyy HH:MM:SS'	01-Mar-2000 15:45:17
1	'dd-mmm-yyyy'	01-Mar-2000
2	'mm/dd/yy'	03/01/00
3	'mmm'	Mar
4	'm'	M
5	'mm'	03
6	'mm/dd'	03/01
7	'dd'	01
8	'ddd'	Wed
9	'd'	W

Numeric Identifier	Date and Time Format	Example
10	'yyyy'	2000
11	'yy'	00
12	'mmmyy'	Mar00
13	'HH:MM:SS'	15:45:17
14	'HH:MM:SS PM'	3:45:17 PM
15	'HH:MM'	15:45
16	'HH:MM PM'	3:45 PM
17	'QQ-YY'	Q1-01
18	'QQ'	Q1
19	'dd/mm'	01/03
20	'dd/mm/yy'	01/03/00
21	'mmm.dd,yyyy HH:MM:SS'	Mar.01,2000 15:45:17
22	'mmm.dd,yyyy'	Mar.01,2000
23	'mm/dd/yyyy'	03/01/2000
24	'dd/mm/yyyy'	01/03/2000
25	'yy/mm/dd'	00/03/01
26	'yyyy/mm/dd'	2000/03/01
27	'QQ-YYYY'	Q1-2001
28	'mmmyyyy'	Mar2000
29	'yyyy-mm-dd' (ISO 8601)	2000-03-01
30	'yyyymmddTHHMMSS' (ISO 8601)	20000301T154517
31	'yyyy-mm-dd HH:MM:SS'	2000-03-01 15:45:17

`DateStringIn` — Text representing dates and times to convert

character vector | cell array

Text representing dates and times to convert, specified as a single character vector or a cell array of character vectors, where each row corresponds to one date and time.

datestr considers two-character years (for example, '79') to fall within the 100-year range centered around the current year.

All text representing dates and times must have the same date format, and they must be in one of the following date formats.

Format of Text Representing Dates and Times	Example
'dd-mmm-yyyy HH:MM:SS'	01-Mar-2000 15:45:17
'dd-mmm-yyyy'	01-Mar-2000
'mm/dd/yyyy'	03/01/2000
'mm/dd/yy'	03/01/00
'mm/dd'	03/01
'mmm.dd,yyyy HH:MM:SS'	Mar.01,2000 15:45:17
'mmm.dd,yyyy'	Mar.01,2000
'yyyy-mm-dd HH:MM:SS'	2000-03-01 15:45:17
'yyyy-mm-dd'	2000-03-01
'yyyy/mm/dd'	2000/03/01
'HH:MM:SS'	15:45:17
'HH:MM:SS PM'	3:45:17 PM
'HH:MM'	15:45
'HH:MM PM'	3:45 PM

Note: When converting from one date and time format to another, you should first pass the text to the datenum function, so that you can specify the format of the inputs. This ensures that the format of the input dates and times is correctly interpreted. For example, see "Convert Date String from Custom Format" on page 1-2236.

PivotYear — Start year of 100-year date range

present minus 50 years (default) | integer

Start year of the 100-year date range in which a two-character year resides, specified as an integer. Use a pivot year to interpret dates that specify the year as two characters.

If `formatIn` contains the time of day, the pivot year is computed from the current time of the current day, month, and year. Otherwise it is computed from midnight of the current day, month, and year.

Example: `2000`

Note: If the input date format specifies a four-character year, then the last two characters are truncated, and the *first* two characters specify the year. For example, if the date and pivot year are specified as `('25122015','ddmmyyyy',2000)`, then the resulting date is `25-12-2020`, not `25-12-2015`.

Data Types: `double`

Output Arguments

`DateString` — Text representing dates and times
character vector | two-dimensional character array

Text representing dates and times, returned as a character array with `m` rows, where `m` is the total number of input dates and times. The default output format is `dd-mmm-yyyy HH:MM:SS` (day-month-year hour:minute:second) unless the hours, minutes and seconds are all 0 in which case `HH:MM:SS` is suppressed.

Tips

- To convert text not in a predefined MATLAB date format, first convert the text to a date number, using either `datenum` or `datevec`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`cellstr` | `datenum` | `datetime` | `datevec`

Topics

“Represent Dates and Times in MATLAB”
“Converting Date Vector Returns Unexpected Output”

Introduced before R2006a

datetick

Date formatted tick labels

For 2-D line plots, it is more convenient to plot datetime values using the `plot` function. You can then format the tick labels using the `xtickformat` and `ytickformat` functions. `datetick` is useful when plotting numeric values that are serial date numbers.

Syntax

```
datetick(tickaxis)
datetick(tickaxis,dateFormat)

datetick( ___ ,'keeplimits')

datetick( ___ ,'keepticks')

datetick(axes_handle, ___ )
```

Description

`datetick(tickaxis)` labels the tick lines of the axis specified by `tickaxis` using dates, replacing the default numeric labels. `datetick` selects a label format based on the minimum and maximum limits of the specified axis. The axis data values should be serial date numbers, as returned by the `datenum` function.

`datetick(tickaxis,dateFormat)` formats the labels according to `dateFormat`.

`datetick( ___ ,'keeplimits')` changes the tick labels to date-based labels while preserving the axis limits. Append `'keeplimits'` to any of the previous syntaxes.

`datetick( ___ ,'keepticks')` changes the tick labels to date-based labels while preserving their locations. Append `'keepticks'` to any of the previous syntaxes.

`datetick(axes_handle, ___ )` labels the tick lines of an axis on the axes specified by `axes_handle`. The `axes_handle` argument can precede any of the input argument combinations in the previous syntaxes.

Examples

Label x-Axis Ticks with 2-digit Years

Graph population data for the 20th Century taken from the 1990 US census and label *x*-axis ticks with 2-digit years.

Create time data by decade.

```
t = (1900:10:1990)';
```

Enter total population counts for the USA.

```
p = [75.995 91.972 105.711 123.203 131.669 ...
 150.697 179.323 203.212 226.505 249.633]';
```

Convert years to serial date numbers using the `datenum` function, and then create a bar graph of the data.

```
figure
bar(datenum(t,1,1),p)
```

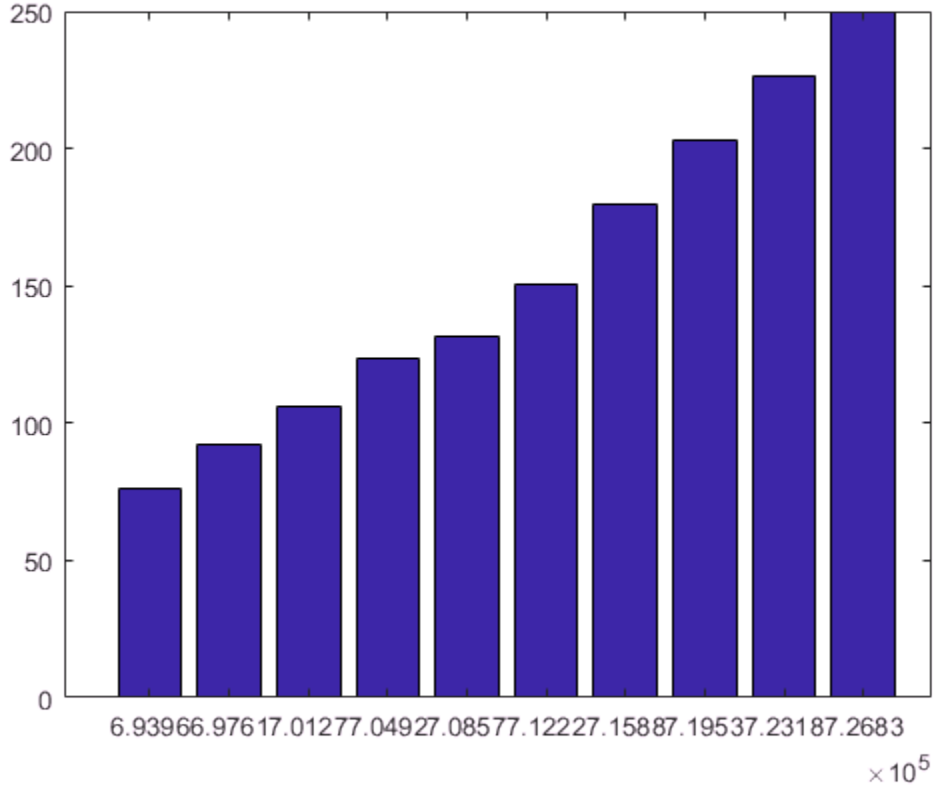

Replace *x*-axis ticks with 2-digit years. The numeric identifier `11` corresponds to the predefined MATLAB® date format `'yy'`.

```
dateFormat = 11;
datetick('x',dateFormat)
```

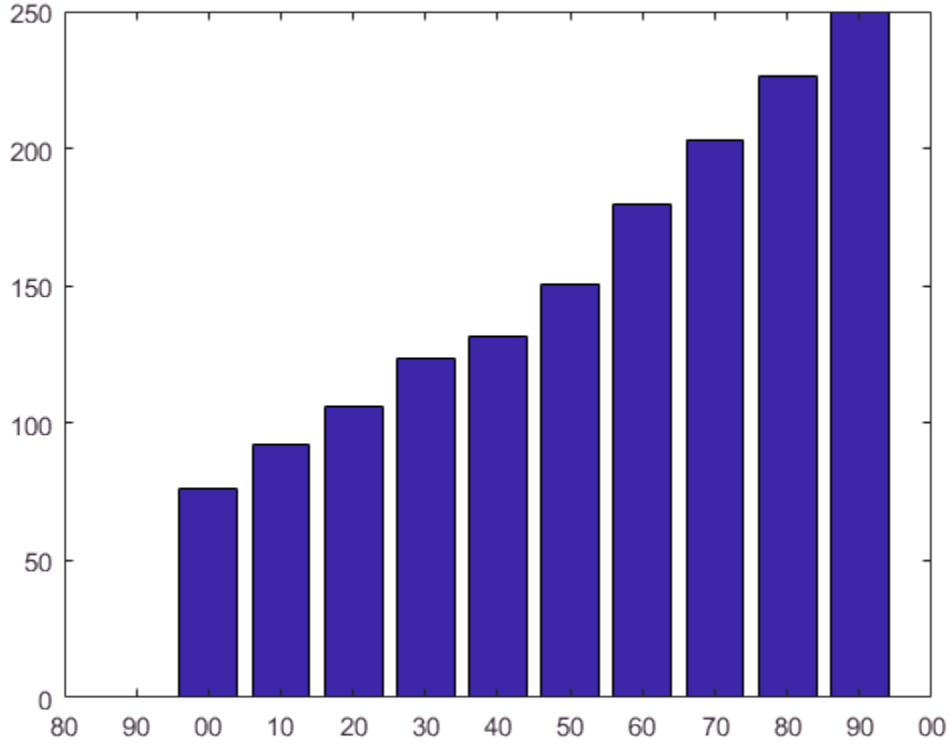

Label x-Axis Ticks with Hours of the Day

Plot traffic count data against date ticks for hours of the day showing AM and PM.

Get traffic count data.

```
load count.dat
```

Create arrays for an arbitrary date, for example, April 18, 1995.

```
n = length(count);
year = repmat(1995,1,n);
month = repmat(4,1,n);
```

```
day = repmat(18,1,n);
```

Create arrays for each of 24 hours.

```
hour = 1:n;
minutes = zeros(1,n);
```

Get the serial date numbers for the date arrays.

```
sdate = datenum(year,month,day,hour,minutes,minutes);
```

Plot a 3-D bar graph of the traffic data against the serial date numbers.

```
bar3(sdate,count)
```

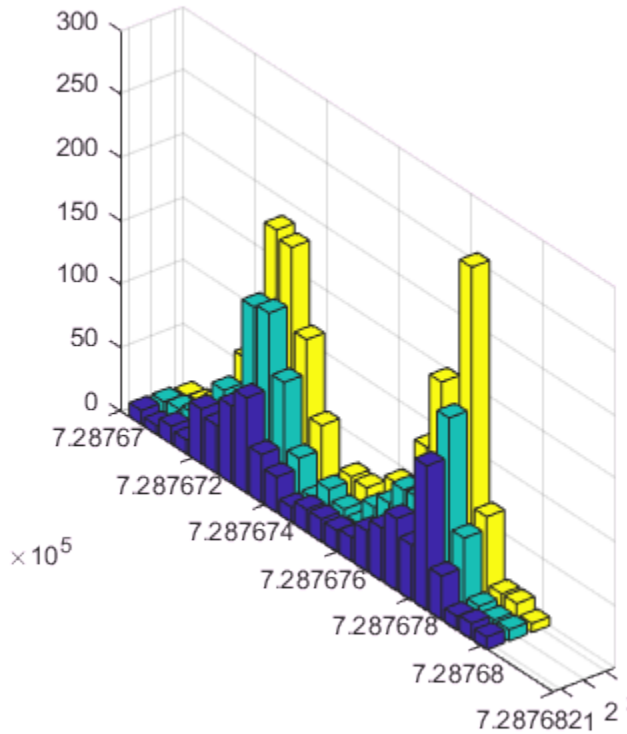

Label the tick lines of the graph's *y*-axis with the hours of the day.

```
datetick('y','HHPM')
```

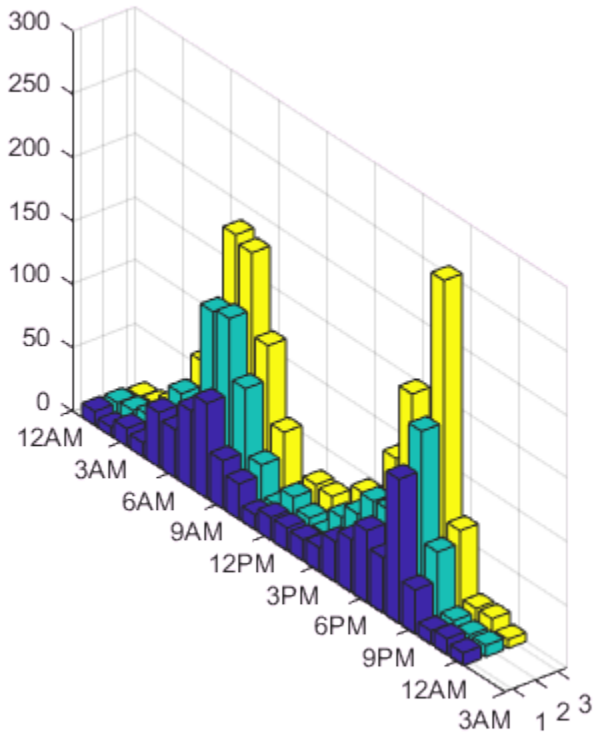

Label x-Axis and Preserve Axis Limits

Select a starting date.

```
startDate = datenum('02-01-1962');
```

Select an ending date.

```
endDate = datenum('11-15-2012');
```

Create a variable, `xdata`, that corresponds to the number of years between the start and end dates.

```
xData = linspace(startDate,endDate,50);
```

Plot random data.

```
figure
stem(xData,rand(1,50))
```

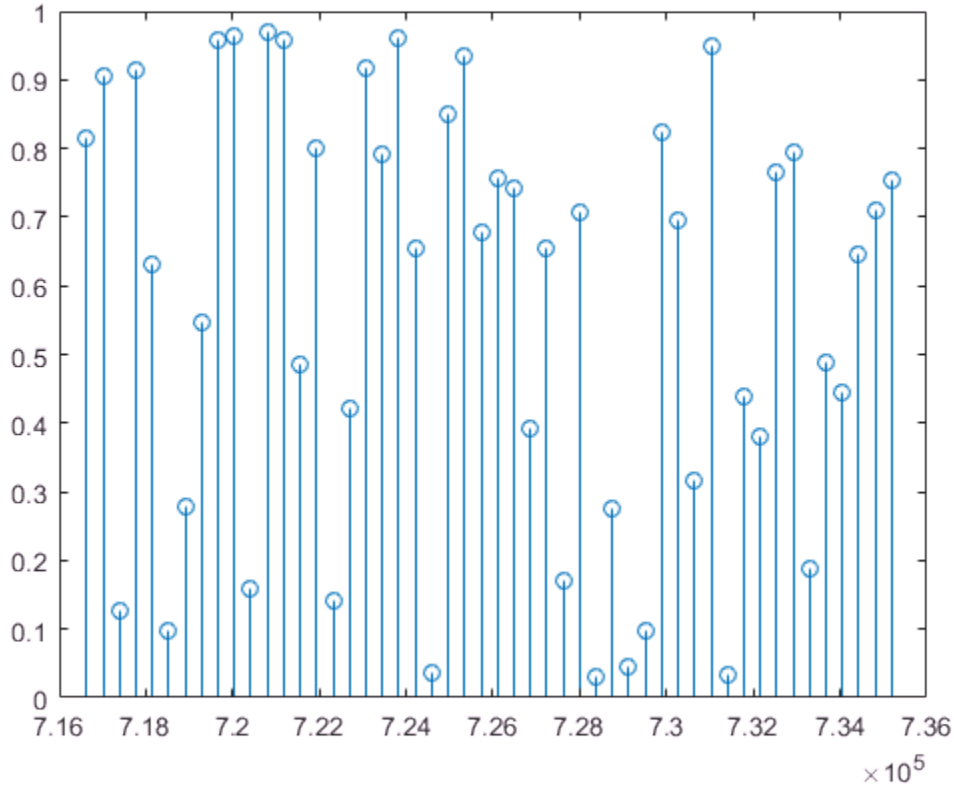

Label the *x*-axis with 4-digit years, preserving the *x*-axis limits by using the `'keeplimits'` option.

```
datetick('x','yyyy','keeplimits')
```

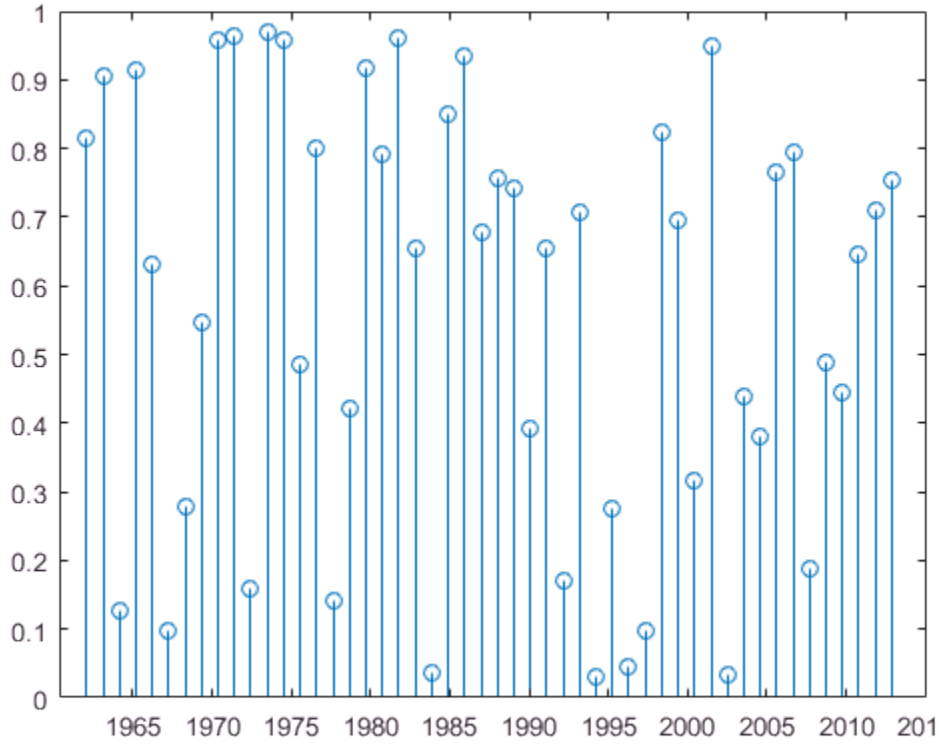

Add Month Labels to Plot and Preserve Number of Ticks

Select a starting date.

```
startDate = datenum('01-01-2009');
```

Select an ending date.

```
endDate = datenum('12-31-2009');
```

Create a variable, `xdata`, that corresponds to the number of months between the start and end dates.

```
xData = linspace(startDate,endDate,12);
```

Plot random data.

```
figure
stairs(xData,rand(1,12))
```

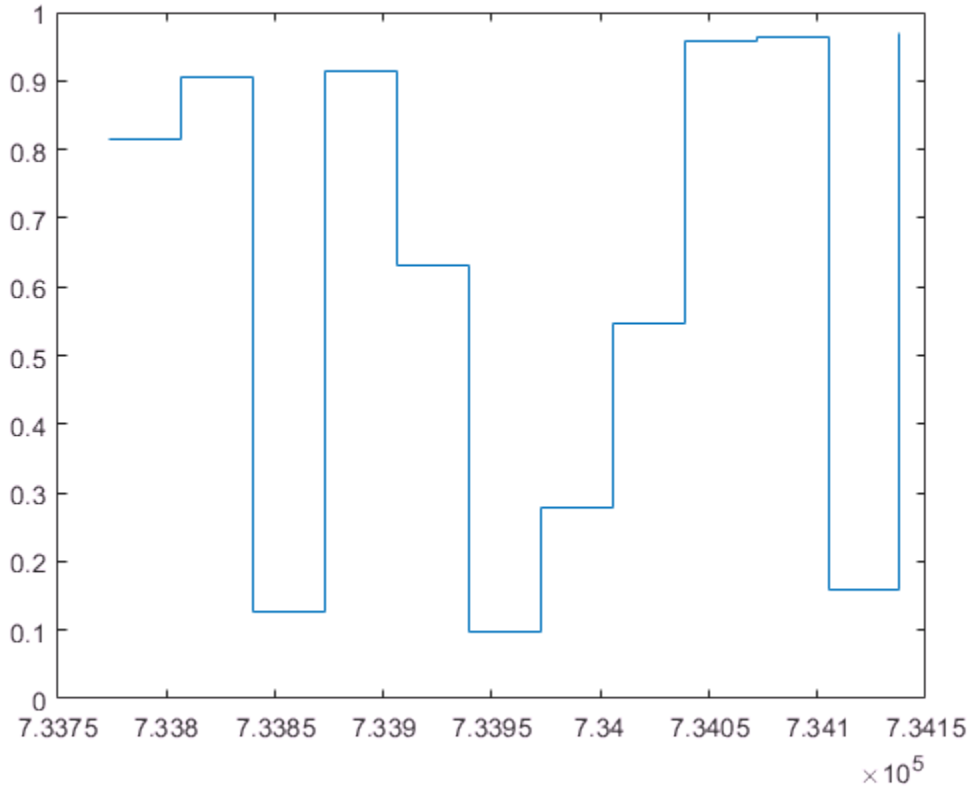

Set the number of `XTicks` to the number of points in `xData`.

```
ax = gca;
ax.XTick = xData;
```

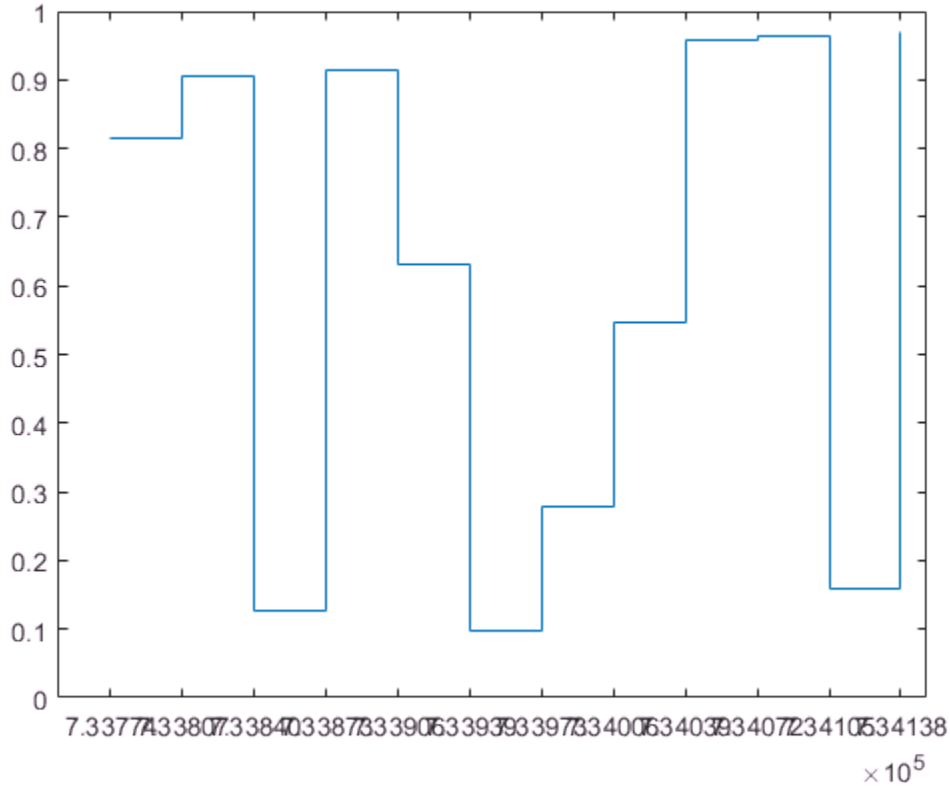

Label the *x*-axis with month names, preserving the total number of ticks by using the `'keepticks'` option.

```
datetick('x','mmm','keepticks')
```

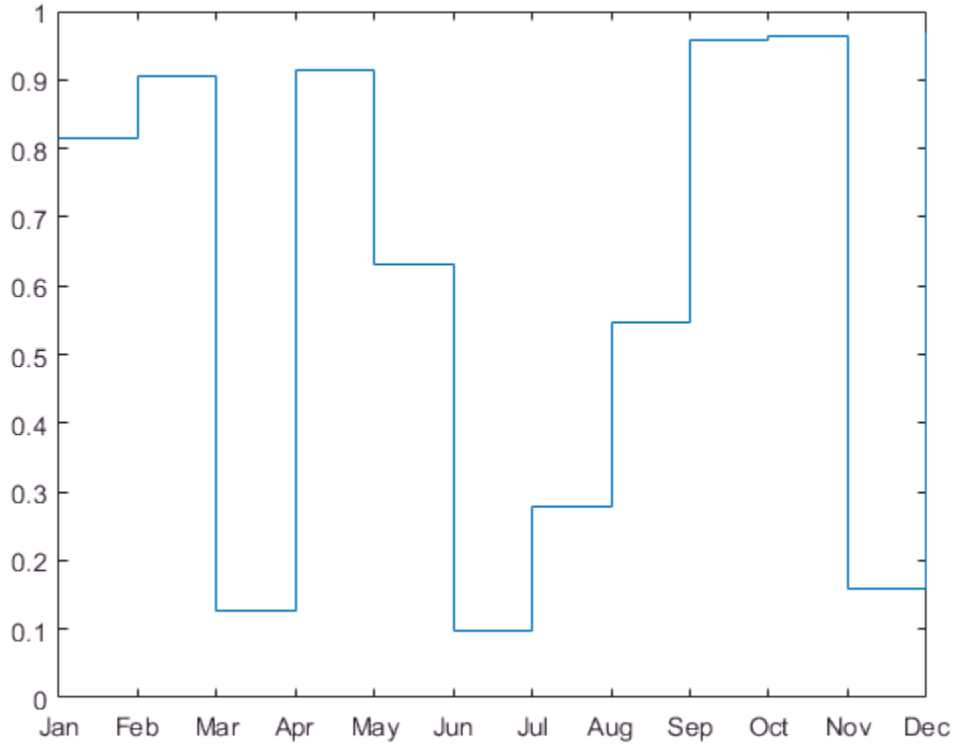

Create Multiple Plots Within Figure and Label Axis with Month Names

Select a starting date and an ending date.

```
startDate = datenum('01-01-2009');
endDate = datenum('12-31-2009');
```

Create a variable, `xdata`, that corresponds to the number of months between the start and end dates.

```
xData = linspace(startDate,endDate,12);
```

Plot random data.

```
ax1 = subplot(2,1,1);
bar(xData,rand(1,12))
ax2 = subplot(2,1,2);
bar(xData,rand(1,12))
```

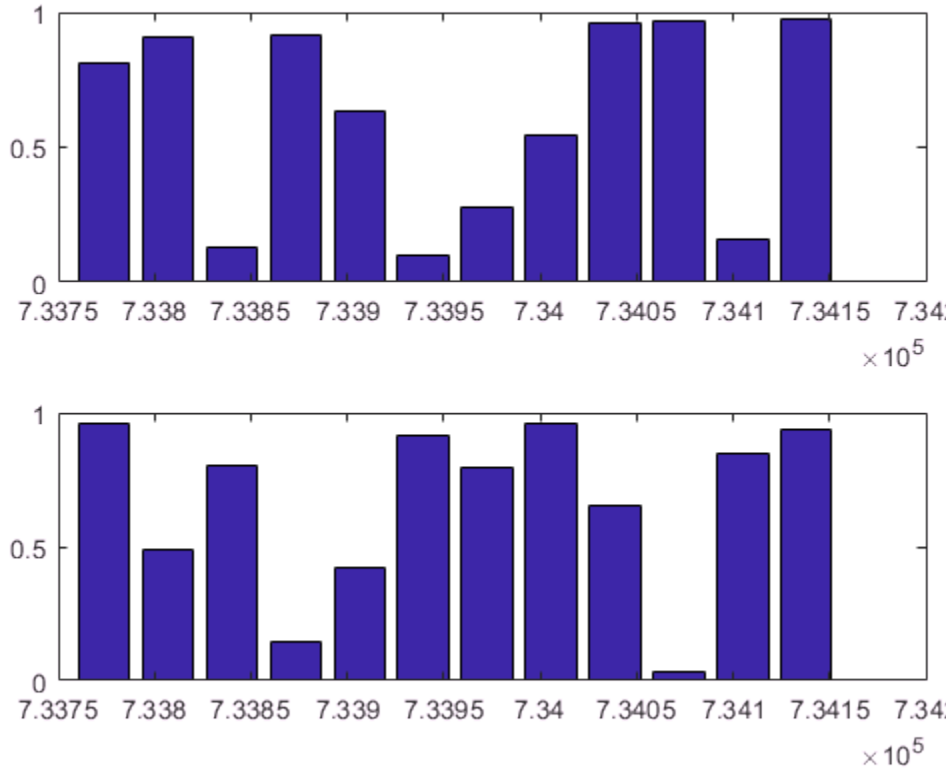

Set the number of `XTicks` to the number of points in `xData`. Label the *x*-axis of each subplot with month names, referring to each subplot using its axes handle. Preserve the total number of ticks by using the `'keepticks'` option. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
ax1.XTick = xData;
datetick(ax1,'x','mm','keepticks')
```

```
ax2.XTick = xData;
datetick(ax2,'x','mmm','keepticks')
```

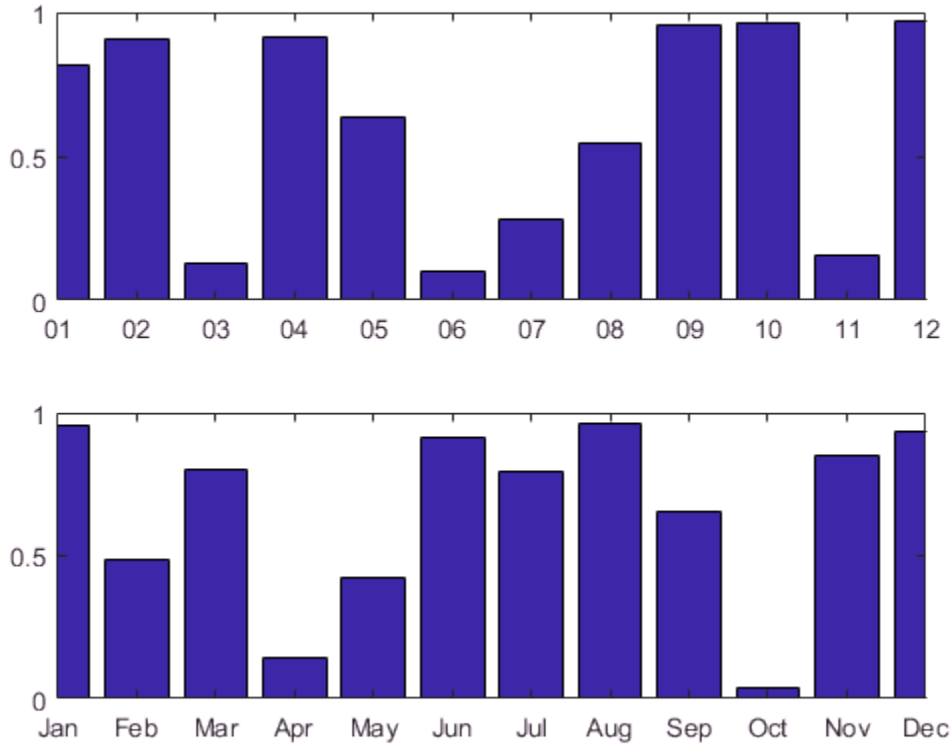

Input Arguments

`tickaxis` — Axis to label

`'x'` (default) | `'y'` | `'z'`

Axis to label with dates, specified as `'x'`, `'y'`, or `'z'`.

`dateFormat` — Format of tick line labels

character vector | integer

Format of the tick line labels, specified as a character vector of symbolic identifiers or an integer that corresponds to a predefined format.

The following table shows symbolic identifiers that you can use to construct the format. You can include characters such as a hyphen, space, or colon to separate the fields. For example, to display the day of the month followed by the three-letter abbreviation of the day of the week in parentheses, use `dateFormat = 'dd (ddd)'`.

Note: The letter identifiers that `datetick` accepts are different from the identifiers used by the `datetime` function.

Symbolic Identifier	Description	Example
`yyyy`	Year in full	`1990`, `2002`
`yy`	Year in two digits	`90`, `02`
`QQ`	Quarter year using letter `Q` and one digit	`Q1`
`mmmm`	Month using full name	`March`, `December`
`mmm`	Month using first three letters	`Mar`, `Dec`
`mm`	Month in two digits	`03`, `12`
`m`	Month using capitalized first letter	`M`, `D`
`dddd`	Day using full name	`Monday`, `Tuesday`
`ddd`	Day using first three letters	`Mon`, `Tue`
`dd`	Day in two digits	`05`, `20`
`d`	Day using capitalized first letter	`M`, `T`
`HH`	Hour in two digits (no leading zeros when symbolic identifier `AM` or `PM` is used)	`05`, `5 AM`
`MM`	Minute in two digits	`12`, `02`
`SS`	Second in two digits	`07`, `59`

Symbolic Identifier	Description	Example
FFF	Millisecond in three digits	057
AM or PM	AM or PM inserted in text representing time	3:45:02 PM

The following table lists predefined MATLAB date formats.

Numeric Identifier	Date and Time Format	Example
-1 (default)	'dd-mmm-yyyy HH:MM:SS' or 'dd-mmm-yyyy' if 'HH:MM:SS'= 00:00:00	01-Mar-2000 15:45:17 or 01-Mar-2000
0	'dd-mmm-yyyy HH:MM:SS'	01-Mar-2000 15:45:17
1	'dd-mmm-yyyy'	01-Mar-2000
2	'mm/dd/yy'	03/01/00
3	'mmm'	Mar
4	'm'	M
5	'mm'	03
6	'mm/dd'	03/01
7	'dd'	01
8	'ddd'	Wed
9	'd'	W
10	'yyyy'	2000
11	'yy'	00
12	'mmmyy'	Mar00
13	'HH:MM:SS'	15:45:17
14	'HH:MM:SS PM'	3:45:17 PM
15	'HH:MM'	15:45
16	'HH:MM PM'	3:45 PM
17	'QQ-YY'	Q1-01
18	'QQ'	Q1
19	'dd/mm'	01/03

Numeric Identifier	Date and Time Format	Example
20	'dd/mm/yy'	01/03/00
21	'mmm.dd,yyyy HH:MM:SS'	Mar.01,2000 15:45:17
22	'mmm.dd,yyyy'	Mar.01,2000
23	'mm/dd/yyyy'	03/01/2000
24	'dd/mm/yyyy'	01/03/2000
25	'yy/mm/dd'	00/03/01
26	'yyyy/mm/dd'	2000/03/01
27	'QQ-YYYY'	Q1-2001
28	'mmmyyyy'	Mar2000
29	'yyyy-mm-dd' (ISO 8601)	2000-03-01
30	'yyyymmddTHHMMSS' (ISO 8601)	20000301T154517
31	'yyyy-mm-dd HH:MM:SS'	2000-03-01 15:45:17

Tips

- To change the tick spacing and locations, set the appropriate axes property (that is, XTick, YTick, or ZTick) before calling `datetick`.
- Calling `datetick` sets the `TickMode` of the specified axis to `'manual'`. This means that after zooming, panning or otherwise changing axis limits, you should call `datetick` again to update the ticks and labels.
- The best way to work with dates and times in MATLAB is to use `datetime` values, which offer more features than serial date numbers. Plot `datetime` values using the `plot` function. Use the `DatetimeTickFormat` name-value pair argument to modify the format of the axis tick labels.

Algorithms

`datetick` calls the `datestr` function to convert date numbers to text.

See Also

See Also

`datenum` | `datestr` | `datetime` | `plot`

Topics

"Plot Dates and Durations"

Introduced before R2006a

datetime

Create array based on current date, or convert from date strings or numbers

The `datetime` function creates an array that represents points in time using the proleptic ISO calendar. `datetime` values have flexible display formats up to nanosecond precision and can account for time zones, daylight saving time, and leap seconds.

Syntax

```
t = datetime
t = datetime(relativeDay)

t = datetime(DateStrings)
t = datetime(DateStrings,'InputFormat',infmt)

t = datetime(DateVectors)
t = datetime(Y,M,D)
t = datetime(Y,M,D,H,MI,S)
t = datetime(Y,M,D,H,MI,S,MS)

t = datetime(X,'ConvertFrom',dateType)

t = datetime( ___ ,Name,Value)
```

Description

`t = datetime` returns a scalar `datetime` array corresponding to the current date and time.

`t = datetime(relativeDay)` uses the date specified by `relativeDay`. The `relativeDay` input can be `'today'`, `'tomorrow'`, `'yesterday'`, or `'now'`.

`t = datetime(DateStrings)` creates an array of datetime values from the text in `DateStrings` representing points in time.

`t = datetime(DateStrings,'InputFormat',infmt)` interprets `DateStrings` using the format specified by `infmt`. All values in `DateStrings` must have the same format.

To avoid ambiguities between similar formats, specify `'InputFormat'` and its corresponding value, `infmt`.

`t = datetime(DateVectors)` creates a column vector of datetime values from the date vectors in `DateVectors`.

`t = datetime(Y,M,D)` creates an array of datetime values for corresponding elements of the `Y`, `M`, and `D` (year, month, day) arrays. The arrays must be of the same size (or any can be a scalar). You also can specify the input arguments as a date vector, `[Y,M,D]`.

`t = datetime(Y,M,D,H,MI,S)` creates an array of `datetime` values for corresponding elements of the `Y`, `M`,`D`,`H`, `MI`, and `S` (year, month, day, hour, minute, and second) arrays. The arrays must be of the same size (or any can be a scalar). You also can specify the input arguments as a date vector, `[Y,M,D,H,MI,S]`.

`t = datetime(Y,M,D,H,MI,S,MS)` creates an array of `datetime` values for corresponding elements of the `Y`, `M`,`D`,`H`, `MI`, `S`, and `MS` (year, month, day, hour, minute, second, and millisecond) arrays. The arrays must be of the same size (or any can be a scalar).

`t = datetime(X,'ConvertFrom',dateType)` converts the numeric values in `X` to a `datetime` array, `t`. The `dateType` argument specifies the type of values in `X`.

If `X` contains POSIX® times or Julian dates that represent local times, then specify the appropriate time zone for `t` using the `'TimeZone'` name-value pair argument. If you do not specify a time zone, then the POSIX times or Julian dates in `X` are treated as UTC times, not local times.

`t = datetime( ___ ,Name,Value)` specifies additional options using one or more name-value pair arguments, in addition to any of the input arguments in the previous syntaxes. For example, you can specify the display format of `t` using the `'Format'` name-value pair argument.

For best performance when creating datetime values from text, specify either `'Format'` or `'InputFormat'` and its corresponding value, `infmt`.

Examples

Current Date and Time in Specific Time Zone

Specify the current date and time in the local system time zone.

```
t = datetime('now','TimeZone','local','Format','d-MMM-y HH:mm:ss Z')
```

```
t = datetime
   24-Feb-2017 13:32:52 -0500
```

Specify the current date and time in the time zone represented by Seoul, Korea

```
t = datetime('now','TimeZone','Asia/Seoul','Format','d-MMM-y HH:mm:ss Z')
```

```
t = datetime
   25-Feb-2017 03:32:52 +0900
```

Date and Time from Character Vectors

Create a `datetime` array from a cell array of character vectors.

```
DateStrings = {'2014-05-26';'2014-08-03'};
t = datetime(DateStrings,'InputFormat','yyyy-MM-dd')
```

```
t = 2×1 datetime array
   26-May-2014
   03-Aug-2014
```

The datetime values in `t` display using the default format, and not the format of the input dates.

Date and Time from String Array

Starting in R2016b, you can create string arrays with the `string` function and convert them to datetime values.

```
str = string({'2016-03-24','2016-04-19'})
```

```
str = 1×2 string array
    "2016-03-24"    "2016-04-19"
```

Convert the strings, specifying the input format as `yyyy-MM-dd`. The format must be specified as a character vector, even though `str` is a string array.

```
t = datetime(str,'InputFormat','yyyy-MM-dd')
```

```
t = 1×2 datetime array
   24-Mar-2016   19-Apr-2016
```

Date and Time from Text with Literal Characters

Convert dates in ISO 8601 format to datetime values.

Create a cell array of character vectors containing dates in ISO 8601 format. In this format, the letter T is used as a delimiter that separates a date and a time. Each character vector includes a time zone offset. The letter Z indicates no offset from UTC.

```
DateStrings = {'2014-05-26T13:30-05:00';'2014-08-26T13:30-04:00';'2014-09-26T13:30Z'}
```

```
DateStrings = 3×1 cell array
    '2014-05-26T13:30-05:00'
    '2014-08-26T13:30-04:00'
    '2014-09-26T13:30Z'
```

Convert the character vectors to datetime values. When specifying the input format, enclose the letter T in single quotes to indicate that it is a literal character. Specify the time zone of the output datetime array using the `TimeZone` name-value pair argument.

```
t = datetime(DateStrings,'InputFormat','uuuu-MM-dd''T''HH:mmXXX','TimeZone','UTC')
```

```
t = 3×1 datetime array
   26-May-2014 18:30:00
   26-Aug-2014 17:30:00
   26-Sep-2014 13:30:00
```

The datetime values in `t` display in the default format.

Date and Time from Text in Foreign Language

Create a cell array of character vectors containing dates in French.

```
C = {'8 avril 2013','9 mai 2013';'10 juin 2014','11 juillet 2014'}
```

```
C = 2×2 cell array
    '8 avril 2013'    '9 mai 2013'
    '10 juin 2014'    '11 juillet 2014'
```

Convert the character vectors in `C` to datetime values. If your computer is set to a locale that uses English, you must specify the `'Locale'` name-value pair argument to indicate that the strings are in French.

```
t = datetime(C,'InputFormat','d MMMM yyyy','Locale','fr_FR')
```

```
t = 2×2 datetime array
   08-Apr-2013   09-May-2013
   10-Jun-2014   11-Jul-2014
```

The datetime values in `t` display in the default format, and in the language MATLAB uses depending on your system locale.

Date and Time from Vectors

Create a `datetime` array from individual arrays of year, month, and day values.

Create sample numeric arrays of year values Y and day values D. In this case, the month value M is a scalar.

```
Y = [2014;2013;2012];
M = 01;
D = [31;30;31];
```

Create the `datetime` array.

```
t = datetime(Y,M,D)
```

```
t = 3×1 datetime array
   31-Jan-2014
   30-Jan-2013
   31-Jan-2012
```

Specify a custom display format for the output, using the `Format` name-value pair argument.

```
t = datetime(Y,M,D,'Format','eeee, MMMM d, y')
```

```
t = 3×1 datetime array
   Friday, January 31, 2014
   Wednesday, January 30, 2013
   Tuesday, January 31, 2012
```

Convert Excel Date Number to Datetime

Create a sample array of Excel® date numbers that represent a number of days since January 0, 1900.

```
X = [39558, 39600; 39700, 39800]
```

```
X =

       39558       39600
       39700       39800
```

Convert the values in X to datetime values.

```
t = datetime(X,'ConvertFrom','excel')
```

```
t = 2×2 datetime array
   20-Apr-2008 00:00:00   01-Jun-2008 00:00:00
   09-Sep-2008 00:00:00   18-Dec-2008 00:00:00
```

Input Arguments

`relativeDay` — Day relative to current date
`'yesterday'` | `'today'` | `'tomorrow'` | `'now'`

Day relative to the current date, specified as one of the following values.

Value of `relativeDay`	Description
`'yesterday'`	Date of the previous day, at midnight
`'today'`	Current date, at midnight
`'tomorrow'`	Date of the following day, at midnight
`'now'`	Current date and time

`DateStrings` — Text representing dates and times
character array | cell array of character vectors | string array

Text representing dates and times, specified as a character array, a cell array of character vectors, or a string array. The `datetime` function first attempts to match the format of `DateStrings` to some common formats. If you know the format, specify

'InputFormat' and its corresponding value, infmt, or the 'Format' name-value pair argument.

Example: '24-Oct-2014 12:45:07'

Example: {'15-Oct-2013' '20-Nov-2014'}

Example: string({'11-Nov-2016' '12-Dec-2016'})

Data Types: char | cell | string

infmt — Format of input text representing dates and times
character vector

Format of the input text representing dates and times, specified as a character vector that contains letter identifiers:

- If infmt does not include a date specifier, then datetime assumes that the values in DateStrings occur during the current day.
- If infmt does not include a time specifier, then datetime assumes that the values in DateStrings occur at midnight.

This table shows several common input formats and examples of the formatted input for the date, Saturday, April 19, 2014 at 9:41:06 PM in New York City.

Value of Format	Example
'yyyy-MM-dd'	2014-04-19
'dd/MM/yyyy'	19/04/2014
'dd.MM.yyyy'	19.04.2014
'yyyy# MM# dd#'	2014# 04# 19#
'MMMM d, yyyy'	April 19, 2014
'eeee, MMMM d, yyyy h:mm a'	Saturday, April 19, 2014 9:41 PM
'MMMM d, yyyy HH:mm:ss Z'	April 19, 2014 21:41:06 -0400
'yyyy-MM-dd''T''HH:mmXXX'	2014-04-19T21:41-04:00

For a complete list of valid letter identifiers, see the Format property for datetime arrays.

Note: The letter identifiers that datetime accepts are different from the identifiers used by the datestr, datenum, and datevec functions.

Data Types: `char`

`DateVectors` — Date vectors
matrix

Date vectors, specified as an `m`-by-6 or `m`-by-3 matrix containing `m` full or partial date vectors, respectively. A full date vector has six elements, specifying year, month, day, hour, minute, and second, in that order. A partial date vector has three elements, specifying year, month, and day, in that order. Each element of `DateVector` should be a positive or negative integer value except for the seconds element, which can be fractional. If an element falls outside the conventional range, `datetime` adjusts both that date vector element and the previous element. For example, if the minutes element is `70`, then `datetime` adjusts the hours element by `1` and sets the minutes element to `10`. If the minutes element is `-15`, then `datetime` decreases the hours element by `1` and sets the minutes element to `45`.

Example: `[2014,10,24,12,45,07]`

Example: `[2014,10,24]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Y,M,D` — Year, month, and day arrays
scalar | vector | matrix | array

Year, month, and day arrays specified as a scalar, vector, matrix, or array. These must be the same size, or any one can be a scalar. `Y,M,D` should be integer values.

If `Y,M,D` are all scalars or all column vectors, you can specify the input arguments as a date vector, `[Y,M,D]`.

If an element of the `Y`, `M`, or `D` inputs falls outside the conventional range, then `datetime` adjusts both that element and the same element of the previous input. For details, see the description for the `DateVectors` input argument.

Example: `2003,10,24`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Y,M,D,H,MI,S` — Year, month, day, hour, minute, and second arrays
scalar | vector | matrix | array

Year, month, day, hour, minute, and second arrays specified as a scalar, vector, matrix, or array. These must be the same size, or any one can be a scalar. Specify fractional seconds as part of the seconds input, `S`. The `Y,M,D,H,MI` arrays must contain integer values.

If `Y,M,D,H,MI,S` are all scalars or all column vectors, you can specify the input arguments as a date vector`[Y,M,D,H,MI,S]`.

If an element of the `Y`, `M`, `D`, `H`, `MI`, or `S` inputs falls outside the conventional range, then `datetime` adjusts both that element and the same element of the previous input. For details, see the description for the `DateVectors` input argument.

Example: `2003,10,24,12,45,07.451`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Y,M,D,H,MI,S,MS` — Year, month, day, hour, minute, second, and millisecond arrays
scalar | vector | matrix | array

Year, month, day, hour, minute, second, and millisecond arrays, specified as a scalar, vector, matrix, or array. These must be the same size, or any one can be a scalar. The `Y,M,D,H,MI,S` arrays must contain integer values. `MS` can contain fractional milliseconds.

If an element of the `Y`, `M`, `D`, `H`, `MI`, `S`, or `MS` inputs falls outside the conventional range, then `datetime` adjusts both that element and the same element of the previous input. For details, see the description for the `DateVectors` input argument.

Example: `2003,10,24,12,45,07,10.52`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`X` — Numeric values
scalar | matrix | multidimensional array

Numeric values, specified as a scalar, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`dateType` — Type of values in `X`
`'datenum'` | `'excel'` | `'excel1904'` | `'juliandate'` | `'modifiedjuliandate'` | `'posixtime'` | `'yyyymmdd'` | `'epochtime'`

Type of values in `X`, specified as one of the following values.

Value of `dateType`	Type of values in `X`
`'datenum'`	Number of days since 0-Jan-0000 (proleptic ISO calendar).
`'excel'`	Number of days since 0-Jan-1900. Excel date numbers are rounded to the nearest microsecond. **Note:** Excel incorrectly assumes that the year 1900 is a leap year. Therefore, when computing Excel date numbers there is a discontinuity of one extra day between February 28, 1900 and March 1, 1900.
`'excel1904'`	Number of days since 0-Jan-1904. Excel date numbers are rounded to the nearest microsecond. **Note:** Excel incorrectly assumes that the year 1900 is a leap year. Therefore, when computing Excel date numbers there is a discontinuity of one extra day between February 28, 1900 and March 1, 1900.
`'juliandate'`	Number of days since noon UTC 24-Nov-4714 BCE (proleptic Gregorian calendar). If you convert `X` to a `datetime` array without specifying a time zone, then the `datetime` values represent UTC times, not local times. To represent local times, specify a time zone using the `'TimeZone'` name-value pair argument. **Example:** Convert `X` using the time zone for New York. `T = datetime(X,'ConvertFrom','juliandate',...`

Value of `dateType`	Type of values in `X`

	`'TimeZone','America/New_York')`
	
	Then, you can convert `T` to an unzoned `datetime` array representing local times by assigning an empty character vector to `TimeZone`.
	
	`T.TimeZone = ''`

`'modifiedjuliandate'`	Number of days since midnight UTC 17-Nov-1858.
	
	If you convert `X` to a `datetime` array without specifying a time zone, then the `datetime` values represent UTC times, not local times. To represent local times, specify a time zone using the `'TimeZone'` name-value pair argument.
	
	Example: Convert `X` using the time zone for New York.
	
	`T = datetime(X,'ConvertFrom','modifiedjuliandate`
	`'TimeZone','America/New_York')`
	
	Then, you can convert `T` to an unzoned `datetime` array representing local times by assigning an empty character vector to `TimeZone`.
	
	`T.TimeZone = ''`

Value of `dateType`	Type of values in `X`

`'posixtime'`	Number of seconds since 1-Jan-1970 00:00:00 UTC, not counting leap seconds.
	
	If you convert `X` to a `datetime` array without specifying a time zone, then the `datetime` values represent UTC times, not local times. To represent local times, specify a time zone using the `'TimeZone'` name-value pair argument.
	
	Example: Convert `X` using the time zone for New York.
	
	`T = datetime(X,'ConvertFrom','posixtime',...`
	`'TimeZone','America/New_York')`
	
	Then, you can convert `T` to an unzoned `datetime` array representing local times by assigning an empty character vector to `TimeZone`.
	
	`T.TimeZone = ''`

`'yyyymmdd'`	Dates as YYYYMMDD numeric values. For example, `20140402` represents April 2, 2014.

`'epochtime','Epoch',`*`epochValue`*	Number of seconds since an epoch.
	
	You must additionally specify *`epochValue`*, which is a scalar `datetime` or a character vector representing the epoch time.
	
	Example: Return the number of days since January 1, 2000.
	
	`T = datetime(X,'ConvertFrom',...`
	`'epochtime','Epoch','2000-01-01')`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Format','eeee MMMM d, y','TimeZone','local'` applies a display format to datetime values and specifies the local time zone.

`'Format'` — Display format

`'default'` | `'defaultdate'` | `'preserveinput'` | character vector

Display format of the values in the output array, `y`, specified as the comma-separated pair consisting of `'Format'` and one of the following values.

Value of `Format`	Description
`'default'`	Use the default display format.
`'defaultdate'`	Use the default display format for datetime values created without time components.
`'preserveinput'`	Use the format specified by the input format, `infmt`. If you do not specify `infmt`, then `datetime` determines the format automatically.

The factory default format depends on your system locale. To change the default display format, see “Default datetime Format”.

Alternatively, use the letters `A-Z` and `a-z` to construct a custom value for `Format`. These letters correspond to the Unicode Locale Data Markup Language (LDML) standard for dates. You can include non-ASCII or nonletter characters such as a hyphen, space, or colon to separate the fields. To include the letters `A-Z` and `a-z` as literal characters in the format, enclose them with single quotes.

Example: `'Format','eeee, MMMM d, yyyy HH:mm:ss'` displays a date and time such as `Saturday, April 19, 2014 21:41:06`.

This table shows several common display formats and examples of the formatted output for the date, Saturday, April 19, 2014 at 9:41:06 PM in New York City. For a complete list of valid letter identifiers, see the Format property for datetime arrays.

Value of `Format`	Example
`'yyyy-MM-dd'`	`2014-04-19`
`'dd/MM/yyyy'`	`19/04/2014`
`'dd.MM.yyyy'`	`19.04.2014`
`'yyyy# MM# dd#'`	`2014# 04# 19#`
`'MMMM d, yyyy'`	`April 19, 2014`
`'eeee, MMMM d, yyyy h:mm a'`	`Saturday, April 19, 2014 9:41 PM`
`'MMMM d, yyyy HH:mm:ss Z'`	`April 19, 2014 21:41:06 -0400`
`'yyyy-MM-dd''T''HH:mmXXX'`	`2014-04-19T21:41-04:00`

Note: The letter identifiers that `datetime` accepts are different from the identifiers used by the `datestr`, `datenum`, and `datevec` functions.

If you specify a `DateStrings` input but do not specify the `'InputFormat'` parameter, then `datetime` tries to use the `Format` value to interpret `DateStrings`.

Data Types: `char`

`'Locale'` — Locale of `DateStrings`

character vector

Locale of the values in `DateStrings`, specified as the comma-separated pair consisting of `'Locale'` and a character vector. The `Locale` value determines how `datetime` interprets `DateStrings`. However, it does not determine how the output `datetime` values display.

The `Locale` value can be:

- `'system'`, to specify your system locale.
- a character vector in the form *xx_YY*, where *xx* is a lowercase ISO 639-1 two-letter code that specifies a language, and *YY* is an uppercase ISO 3166-1 alpha-2 code that specifies a country.

This table lists some common values for the locale.

Locale	Language	Country
'de_DE'	German	Germany
'en_GB'	English	United Kingdom
'en_US'	English	United States
'es_ES'	Spanish	Spain
'fr_FR'	French	France
'it_IT'	Italian	Italy
'ja_JP'	Japanese	Japan
'ko_KR'	Korean	Korea
'nl_NL'	Dutch	Netherlands
'zh_CN'	Chinese (simplified)	China

You can use the `'Locale'` name-value pair only when you use the `DateStrings` input argument.

Example: `'Locale','de_DE'`

Note: The `Locale` value determines how input values are interpreted. The output `datetime` values always display in the language specified by the **Locale** option in the **Datetime format** section of the Preferences panel. To change the default datetime locale, see "Set Command Window Preferences".

Data Types: `char`

`'PivotYear'` — Start year of 100-year date range

`year(datetime('now'))-50` (default) | integer

Start year of the 100-year date range in which a two-character year resides, specified as the comma-separated pair consisting of `'PivotYear'` and an integer. Use a pivot year to interpret dates that specify the year as two characters. That is, the pivot year has an effect only when the `infmt` argument includes `y` or `yy`.

You can use the `'PivotYear'` name-value pair only when you use the `DateStrings` input argument.

Example: `'PivotYear',1900`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'TimeZone'` — Time zone region
`''` (default) | character vector

Time zone region, specified as the comma-separated pair consisting of `'TimeZone'` and a character vector. The value of `TimeZone` specifies the time zone that the `datetime` function uses to interpret the input data. `TimeZone` also specifies the time zone of the output array, `T`. If the input data are character vectors that include a time zone, then the `datetime` function converts all values to the specified time zone.

The value of `TimeZone` can be:

- `''`, to create an "unzoned" `datetime` array that does not belong to a specific time zone.
- The name of a time zone region from the IANA Time Zone Database, for example, `'America/Los_Angeles'`. The name of a time zone region accounts for the current and historical rules for standard and daylight offsets from UTC that are observed in a geographic region.
- An ISO 8601 character vector of the form `+HH:mm` or `-HH:mm`, for example, `'+01:00'`, to specify a time zone that is a fixed offset from UTC.
- `'UTC'`, to create a `datetime` array in Universal Coordinated Time.
- `'UTCLeapSeconds'`, to create a `datetime` array in Universal Coordinated Time that accounts for leap seconds.
- `'local'`, to create a `datetime` array in the system time zone.

This table lists some common names of time zone regions from the IANA Time Zone Database.

Value of `TimeZone`	UTC Offset	UTC DST Offset
`'Africa/Johannesburg'`	+02:00	+02:00
`'America/Chicago'`	−06:00	−05:00
`'America/Denver'`	−07:00	−06:00
`'America/Los_Angeles'`	−08:00	−07:00
`'America/New_York'`	−05:00	−04:00
`'America/Sao_Paulo'`	−03:00	−02:00

Value of `TimeZone`	UTC Offset	UTC DST Offset
`'Asia/Hong_Kong'`	+08:00	+08:00
`'Asia/Kolkata'`	+05:30	+05:30
`'Asia/Tokyo'`	+09:00	+09:00
`'Australia/Sydney'`	+10:00	+11:00
`'Europe/London'`	+00:00	+01:00
`'Europe/Zurich'`	+01:00	+02:00

Data Types: `char`

Output Arguments

`t` — Dates and time

`datetime` array

Dates and time, returned as a `datetime` array. Each element includes a date and a time of day.

`t` has the following properties.

Property	Description
`Format`	Display format of the values in `t`, specified as a character vector
`TimeZone`	Time zone in which the values in `t` are interpreted, specified as a character vector
`Year`	Array containing the year number of each element in `t`
`Month`	Array containing the month number of each element in `t`
`Day`	Array containing the day of month number of each element in `t`
`Hour`	Array containing the hour of each element in `t`
`Minute`	Array containing the minute of each element in `t`
`Second`	Array containing the second, including a fractional part, of each element in `t`

After you create a `datetime` array, `t`, you can access or change the value of any of its properties using dot notation. For example, to display the values of `t` in the format, `'yyyy-MM-dd'`, type:

```
t.Format = 'yyyy-MM-dd';
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

Always specify the input datetime format when creating a tall datetime array for character vectors in a cell array.

For more information, see "Tall Arrays".

See Also

See Also

datetime Properties | `timezones`

Topics

"Represent Dates and Times in MATLAB"
"Set Date and Time Display Format"
"Specify Time Zones"
"Convert Date and Time to Julian Date or POSIX Time"
"Generate Sequence of Dates and Time"
"Share Code and Data Across Locales"

Introduced in R2014b

datetime Properties

Assign date and time components and specify datetime display format

Description

The `Format` property controls the display of `datetime` values. The other properties control the values of components such as years and months in the `datetime` array. Use dot notation to refer to a particular array and property:

```
t = datetime(2014,07,01,06,0,0);
t.Format = 'MMMM d, y';
```

Properties

`Format` — Display format
`'default'` | `'defaultdate'` | character vector

Display format, specified as a character vector of the letters `A-Z` and `a-z`, that correspond to the Unicode Locale Data Markup Language (LDML) standard for dates.

Example: `'eeee, MMMM d, yyyy HH:mm:ss'` displays a date and time such as `Saturday, April 5, 2014 21:41:06`.

The following tables show the letters you can use to construct the value for `Format`. You can include nonletter characters such as a hyphen, space, colon, or any non-ASCII characters to separate the fields. To include the letters `A-Z` and `a-z` as literal characters in the format, enclose them with single quotes.

Example: `'uuuu-MM-dd''T''HH:mm:ss'` displays a date and time, such as `2014-04-05T09:41:06`.

The examples display the formatted output for the date, Saturday, April 5, 2014 at 9:41:06.12345 PM, in New York City.

Date and Time Formats

Use these identifiers to specify the display formats of date and time fields.

Letter Identifier	Description	Display
G	Era	CE
y	Year, with no leading zeros. See the Note that follows this table.	2014
yy	Year, using last two digits. See the Note that follows this table.	14
yyy, yyyy ...	Year, using at least the number of digits specified by the number of instances of 'y'	For the year 2014, 'yyy' displays 2014, while 'yyyyy' displays 02014.
u, uu, ...	ISO year. A single number designating the year. An ISO year value assigns positive values to CE years and negative values to BCE years, with 1 BCE being year 0.	2014
Q	Quarter, using one digit	2
QQ	Quarter, using two digits	02
QQQ	Quarter, abbreviated	Q2
QQQQ	Quarter, full name	2nd quarter
M	Month, numerical using one or two digits	4
MM	Month, numerical using two digits	04
MMM	Month, abbreviated name	Apr
MMMM	Month, full name	April
MMMMM	Month, capitalized first letter	A
W	Week of the month	1
d	Day of the month, using one or two digits	5
dd	Day of the month using two digits	05
D	Day of the year, using one, two or three digits	95
DD	Day of the year using two digits	95
DDD	Day of the year using three digits	095

Letter Identifier	Description	Display
e	Day of the week, numerical using one or two digits.	7, where Sunday is the first day of the week.
ee	Day of the week, numerical using two digits	07
eee	Day, abbreviated name	Sat
eeee	Day, full name	Saturday
eeeee	Day, capitalized first letter	S
a	Day period (AM or PM)	PM
h	Hour, 12-hour clock notation using one or two digits	9
hh	Hour, 12-hour clock notation using two digits	09
H	Hour, 24-hour clock notation using one or two digits	21
HH	Hour, 24-hour clock notation using two digits	21
m	Minute, using one or two digits	41
mm	Minute, using two digits	41
s	Second, using one or two digits	6
ss	Second, using two digits	06
S, SS, ..., SSSSSSSSS	Fractional second, using the number of digits specified by the number of instances of 'S' (up to 9 digits).	'SSS' truncates 6.12345 seconds to 123.

Note: If you read a two-digit year number and specify the format as y or yy, then the pivot year determines the century to which the year belongs.

Use one or more u characters instead of y characters to represent the year when working with year numbers near zero.

Datetime values later than 144683 years CE or before 140743 BCE display only the year numbers, regardless of the specified `Format` value.

Time Zone Offset Formats

Use these identifiers to specify the display format of the time zone offset. A time zone offset is the amount of time that a specific datetime is offset from UTC. This is different from a time zone, which comprises rules that determine the offsets that are used at specific times of the year. Include a time zone offset identifier in the display format for a datetime array when you want to ensure that the time components are displayed unambiguously.

Letter Identifier	Description	Display
`z`	Abbreviated name of the time zone offset. If this value is not available, then the time zone offset uses the short UTC format, such as `UTC-4`.	`EDT`
`Z`	ISO 8601 basic format with hours, minutes, and optional seconds fields.	`-0400`
`ZZZZ`	Long UTC format.	`UTC-04:00`
`ZZZZZ`	ISO 8601 extended format with hours, minutes, and optional seconds fields. A time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04:00`
`x` or `X`	ISO 8601 basic format with hours field and optional minutes field. If you specify `X`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04`
`xx` or `XX`	ISO 8601 basic format with hours and minutes fields. If you specify `XX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-0400`
`xxx` or `XXX`	ISO 8601 extended format with hours and minutes fields. If you	`-04:00`

Letter Identifier	Description	Display
	specify XXX, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	
xxxx or XXXX	ISO 8601 basic format with hours, minutes, and optional seconds fields. If you specify XXXX, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	-0400
xxxxx or XXXXX	ISO 8601 extended format with hours, minutes, and optional seconds fields. If you specify XXXXX, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	-04:00

`TimeZone` — Time zone

`''` (default) | character vector

Time zone, specified as one of the following character vectors:

- `''`, to create an “unzoned” `datetime` array that does not belong to a specific time zone.
- The name of a time zone region from the IANA Time Zone Database, for example, `'America/Los_Angeles'`. The name of a time zone region accounts for the current and historical rules for standard and daylight offsets from UTC that are observed in a geographic region.
- An ISO 8601 character vector of the form `+HH:mm` or `-HH:mm`, for example, `'+01:00'`, to specify a time zone that is a fixed offset from UTC.
- `'UTC'`, to create a `datetime` array in Universal Coordinated Time.
- `'UTCLeapSeconds'`, to create a `datetime` array in Universal Coordinated Time that accounts for leap seconds.
- `'local'`, to create a `datetime` array in the system time zone. When you query the `TimeZone` property, the IANA value is returned.

This table lists some common names of time zone regions from the IANA Time Zone Database.

Value of TimeZone	UTC Offset	UTC DST Offset
'Africa/Johannesburg'	+02:00	+02:00
'America/Chicago'	−06:00	−05:00
'America/Denver'	−07:00	−06:00
'America/Los_Angeles'	−08:00	−07:00
'America/New_York'	−05:00	−04:00
'America/Sao_Paulo'	−03:00	−02:00
'Asia/Hong_Kong'	+08:00	+08:00
'Asia/Kolkata'	+05:30	+05:30
'Asia/Tokyo'	+09:00	+09:00
'Australia/Sydney'	+10:00	+11:00
'Europe/London'	+00:00	+01:00
'Europe/Zurich'	+01:00	+02:00

You also can use the `timezones` function to display a list of IANA time zone names that the `datetime` function accepts.

Data Types: `char`

`Year` — Year number

scalar | vector | matrix | multidimensional array

Year number of each value in the `datetime` array, specified as a scalar or a vector, matrix, or multidimensional array the same size and shape as the `datetime` array. Each year number is an integer value based on the ISO calendar. Years in the current era are positive and years in the previous era are zero or negative. For example, the year number of 1 BCE is 0.

If you set the `Year` property to a nonleap year for a `datetime` value that occurs on a leap day (February 29), then the `Day` and `Month` properties change to March 1.

`Month` — Month number

scalar | vector | matrix | multidimensional array

Month number of each value in the `datetime` array, specified as a scalar or a vector, matrix, or multidimensional array the same size and shape as the `datetime` array. Each month number is an integer value from 1 to 12. If you set a value outside that range,

then the `Year` property adjusts accordingly, and the `Month` property stays within the range 1 to 12. For example, month 0 corresponds to month 12 of the previous year. For historical dates, the month number is based on the proleptic Gregorian calendar.

`Day` — Day-of-month number

scalar | vector | matrix | multidimensional array

Day-of-month number of each value in the `datetime` array, specified as a scalar or a vector, matrix, or multidimensional array the same size and shape as the `datetime` array. Each day-of-month number is an integer value from 1 to 28, 29, 30, or 31, depending on the month and year. If you set a value outside that range, then the `Month` and `Year` properties adjust accordingly, and the `Day` property stays within the appropriate range. For example, day 0 corresponds to the last day of the previous month. For historical dates, the day number is based on the proleptic Gregorian calendar.

`Hour` — Hour number

scalar | vector | matrix | multidimensional array

Hour number of each value in the `datetime` array, specified as a scalar or a vector, matrix, or multidimensional array the same size and shape as the `datetime` array. Each hour number is an integer value from 0 to 23. If you set a value outside that range, then the `Day`, `Month`, and `Year` properties adjust accordingly, and the `Hour` property stays within the appropriate range. For example, hour -1 corresponds to hour 23 of the previous day.

The following apply to datetime arrays with a specific time zone that follows daylight saving time:

- If you specify a value for the `Hour` property that would create a nonexistent datetime in the hour gap when daylight saving time begins, the value of the `Hour` property adjusts to the next hour.
- If you specify a value for the `Hour` property that would create an ambiguous datetime in the hour overlap when daylight saving time ends, then the datetime adjusts to the second of the two times (in standard time) with that hour.

`Minute` — Minute number

scalar | vector | matrix | multidimensional array

Minute number of each value in the `datetime` array, specified as a scalar or a vector, matrix, or multidimensional array the same size and shape as the `datetime` array. Each minute number is an integer value from 0 to 59. If you specify a value outside that range,

then the `Hour`, `Day`, `Month`, and `Year` properties adjust accordingly, and the `Minute` property stays within the appropriate range. For example, minute -1 corresponds to minute 59 of the previous hour.

`Second` — Second

scalar | vector | matrix | multidimensional array

Second of each value in the `datetime` array, specified as a scalar or a vector, matrix, or multidimensional array the same size and shape as the `datetime` array. Each second value is a floating-point value ordinarily ranging from 0 to less than 60. If you set a value outside that range, then the `Minute`, `Hour`, `Day`, `Month`, and `Year` properties adjust accordingly, and the `Second` property stays within the appropriate range. For example, second -1 corresponds to second 59 of the previous minute.

A `datetime` array with a `TimeZone` value of `'UTCLeapSeconds'` has seconds ranging from 0 to less than 61. The values from 60 to 61 represent datetimes that occur during a leap second.

`SystemTimeZone` — System time zone setting

character vector

This property is read-only.

System time zone setting, specified as a character vector. This time zone setting is determined by the system on which MATLAB is running.

Example: `America/New_York`

See Also

See Also

`datetime` | `timezones`

Introduced in R2014b

DatetimeRuler Properties

Control axis with datetime values

Description

`DatetimeRuler` properties control the appearance and behavior of an *x*-axis, *y*-axis, or *z*-axis that shows datetime values. Each individual axis has its own ruler object. By changing property values of the ruler, you can modify certain aspects of a specific axis.

Use dot notation to refer to a particular ruler and property. Access the ruler objects through the `XAxis`, `YAxis`, and `ZAxis` properties of the `Axes` object.

```
ax = gca;
co = ax.XAxis.Color;
ax.XAxis.Color = 'blue';
```

Appearance

`Color` — Color of axis line and labels

RGB triplet | character vector of a color name | `'none'`

Color of the axis line and labels, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the axis is invisible.

Example: `ax.XAxis.Color = 'red';`

Example: `ax.YAxis.Color = [0.1 0.7 0.8];`

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`

Long Name	Short Name	RGB Triplet
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Note: The `Color` property for the ruler and the associated `XColor`, `YColor`, or `ZColor` property for the parent axes always have the same value. Setting one also sets the other.

`LineWidth` — Width of axis line and tick marks

`0.5` (default) | positive value

Width of axis line and tick marks, specified as a positive value in point units. One point equals 1/72 inch.

Example: `ax.XAxis.LineWidth = 2;`

Note: Setting the `LineWidth` property for the parent axes sets the `LineWidth` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

`Label` — Axis label

text object (default)

Axis label, which is a text object. To display text or change existing text, set the `String` property for the text object. Use other properties to change the text appearance, such as the font style or color.

```
ax = gca;
ax.XAxis.Label.String = 'X Axis';
ax.XAxis.Label.FontSize = 12;
```

For a full list of options, see Text Properties.

Alternatively, add or modify the axis labels using the `xlabel`, `ylabel`, and `zlabel` functions.

Note: The text object is not a child of the ruler object, so it cannot be returned by `findobj` and it does not use the default text property values.

`Visible` — Axis visibility

`'on'` (default) | `'off'`

Axis visibility, specified as one of these values:

- `'on'` — Display the axis.
- `'off'` — Hide the axis without deleting it. You still can access properties of an invisible axis using the ruler object.

Example: `ax.XAxis.Visible = 'off';`

Scale and Direction

`Limits` — Minimum and maximum axis limits

`[0 1]` (default) | two-element vector of the form `[min max]`

Minimum and maximum axis limits, specified as a two-element vector of the form `[min max]`, where `min` and `max` are datetime values. For example:

```
t = datetime(2014,6,28) + caldays(1:10);
y = rand(1,10);
plot(t,y);
ax = gca;
ax.XAxis.Limits = [t(2) t(8)];
```

You can specify both limits, or specify one limit and let the ruler automatically calculate the other.

- To use an automatically calculated minimum limit, set the first element to `-inf`.
- To use an automatically calculated maximum limit, set the second element to `inf`.

Alternatively, set the limits using the `xlim`, `ylim`, and `zlim` functions.

If you assign a value to this property, then MATLAB sets the associated mode to `'manual'`.

Note: The `Limits` property for the ruler and the associated `XLim`, `YLim`, or `ZLim` property for the parent axes always have the same value. Setting one also sets the other.

`LimitsMode` — Selection mode for `Limits` property

`'auto'` (default) | `'manual'`

Selection mode for the `Limits` property, specified as one of these values:

- `'auto'` — Automatically select the axis limits based on the data plotted.
- `'manual'` — Use axis limit values that you specify. To specify the axis limits, set the `Limits` property.

Note: The `LimitsMode` property for the ruler and the associated `XLimMode`, `YLimMode`, or `ZLimMode` property for the parent axes always have the same value. Setting one also sets the other.

`Scale` — Scale of values along axis

`'linear'` (default)

Scale of values along axis, returned as `'linear'`. `DatetimeRuler` objects do not support log scales.

`Direction` — Direction of increasing values

`'normal'` (default) | `'reverse'`

Direction of increasing values, specified as one of these values:

- `'normal'` — Values increase from left to right or bottom to top.
- `'reverse'` — Values increase from right to left or top to bottom.

Note: The `Direction` property for the ruler and the associated `XDir`, `YDir`, or `ZDir` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.Direction = 'reverse';`

Tick Values and Labels

`TickValues` — Tick mark locations along the axis

`[ ]` (default) | vector of datetime values

Tick mark locations along the axis, specified as a vector of datetime values. For example:

```
t = datetime(2014,6,28) + caldays(1:10);
y = rand(1,10);
plot(t,y);
ax = gca;
ax.XAxis.TickValues = [t(1) t(3) t(5) t(10)];
```

If you assign a value to this property, then MATLAB sets the `TickValuesMode` property to `'manual'`.

Alternatively, use the `xticks`, `yticks`, and `zticks` functions.

Note: The `TickValues` property for the ruler and the associated `XTick`, `YTick`, or `ZTick` property for the parent axes always have the same value. Setting one also sets the other.

`TickValuesMode` — Selection mode for `TickValues` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickValues` property, specified as one of these values:

- `'auto'` — Automatically select the tick values based on the data plotted.
- `'manual'` — Use tick values that you specify. To specify the values, set the `TickValues` property.

Note: The `TickValuesMode` property for the ruler and the associated `XTickMode`, `YTickMode`, or `ZTickMode` property for the parent axes always have the same value. Setting one also sets the other.

`TickLabels` — Tick mark labels

`''` (default) | cell array of character vectors | string array

Tick mark labels, specified as a cell array of character vectors or a string array. If you do not specify enough labels for all of the tick values, then the labels repeat. The labels support TeX and LaTeX markup. See the `TickLabelInterpreter` property for more information.

Example: `ax.XAxis.TickLabels = {'January','February','March','April','May'}';`

Example: `ax.YAxis.TickLabels = {'\pi','2\pi','3\pi'}'`

If you set this property, then MATLAB sets the `TickLabelsMode` property to `'manual'`.

Alternatively, specify the tick labels using the `xticklabels`, `yticklabels`, and `zticklabels` functions.

Note: The `TickLabels` property for the ruler and the associated `XTickLabel`, `YTickLabel`, or `ZTickLabel` property for the parent axes always have the same value. Setting one also sets the other.

Data Types: `char` | `string`

`TickLabelsMode` — Selection mode for `TickLabels` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickLabels` property, specified as one of these values:

- `'auto'` — Automatically select the tick labels.
- `'manual'` — Use tick labels that you specify. To specify the labels, set the `TickLabels` property.

Note: The `TickLabelsMode` property for the ruler and the associated `XTickLabelMode`, `YTickLabelMode`, or `ZTickLabelMode` property for the parent axes always have the same value. Setting one also sets the other.

`TickLabelInterpreter` — Interpretation of tick label characters

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of tick label characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

Note: Setting the `TickLabelInterpreter` property for the parent axes sets the `TickLabelInterpreter` property for the ruler to the same value. However, setting the

ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.TickLabelInterpreter = 'latex';`

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the text type and color, and include special characters in the text.

This table lists the supported modifiers with the `TickLabelInterpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the text within the curly braces `{}`.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (rarely available)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Set `specifier` as the name of a font family to change the font style. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Set `specifier` as a scalar numeric value to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`,	`'\color{magenta} text'`

Modifier	Description	Example
	`black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	
`\color[rgb] {specifier}`	Set `specifier` as a three-element RGB triplet to change the font color.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒
`\lambda`	λ	`\Phi`	Φ	`\downarrow`	↓
`\mu`	μ	`\Psi`	Ψ	`\circ`	°
`\nu`	ν	`\Omega`	Ω	`\pm`	±
`\xi`	ξ	`\forall`	∀	`\geq`	≥
`\pi`	π	`\exists`	∃	`\propto`	∝

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	′
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `TickLabelInterpreter` property to `'latex'`. Use dollar symbols around the labels, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$\int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup within the text. The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this is reduced by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

`TickLabelFormat` — Tick label format

character vector of format

Tick label format, specified as a character vector of a format. The default format is based on the data.

Example: `ax.XAxis.TickLabelFormat = 'yyyy-MM-dd';` displays a date and time such as `2014-04-19`.

Example: `ax.XAxis.TickLabelFormat = 'eeee, MMMM d, yyyy HH:mm:ss';` displays a date and time such as `Saturday, April 19, 2014 21:41:06`.

Example: `ax.XAxis.TickLabelFormat = 'MMMM d, yyyy HH:mm:ss Z';` displays a date and time such as `April 19, 2014 21:41:06 -0400`.

The following tables show the letter identifiers that you can use to construct the character vector. To separate the fields, use nonletter characters such as a hyphen, space, colon, or any non-ASCII character. The identifiers correspond to the Unicode Locale Data Markup Language (LDML) standard for dates.

Date and Time Formats

Use these identifiers to specify the display formats of the date and time fields.

Letter Identifier	Description	Display
`G`	Era	`CE`
`y`	Year, with no leading zeros. See the Note that follows this table.	`2014`
`yy`	Year, using last two digits. See the Note that follows this table.	`14`
`yyy`, `yyyy` ...	Year, using at least the number of digits specified by the number of instances of `'y'`	For the year 2014, `'yyy'` displays `2014`, while `'yyyyy'` displays `02014`.
`u`, `uu`, ...	ISO year. A single number designating the year. An ISO year value assigns positive values to CE years and negative values to BCE years, with 1 BCE being year 0.	`2014`
`Q`	Quarter, using one digit	`2`

Letter Identifier	Description	Display
QQ	Quarter, using two digits	02
QQQ	Quarter, abbreviated	Q2
QQQQ	Quarter, full name	2nd quarter
M	Month, numerical using one or two digits	4
MM	Month, numerical using two digits	04
MMM	Month, abbreviated name	Apr
MMMM	Month, full name	April
MMMMM	Month, capitalized first letter	A
W	Week of the month	1
d	Day of the month, using one or two digits	5
dd	Day of the month using two digits	05
D	Day of the year, using one, two or three digits	95
DD	Day of the year using two digits	95
DDD	Day of the year using three digits	095
e	Day of the week, numerical using one or two digits.	7, where Sunday is the first day of the week.
ee	Day of the week, numerical using two digits	07
eee	Day, abbreviated name	Sat
eeee	Day, full name	Saturday
eeeee	Day, capitalized first letter	S
a	Day period (AM or PM)	PM
h	Hour, 12-hour clock notation using one or two digits	9
hh	Hour, 12-hour clock notation using two digits	09

Letter Identifier	Description	Display
H	Hour, 24-hour clock notation using one or two digits	21
HH	Hour, 24-hour clock notation using two digits	21
m	Minute, using one or two digits	41
mm	Minute, using two digits	41
s	Second, using one or two digits	6
ss	Second, using two digits	06
S, SS, ..., SSSSSSSSS	Fractional second, using the number of digits specified by the number of instances of 'S' (up to 9 digits).	'SSS' truncates 6.12345 seconds to 123.

Some tips and considerations:

- If you read a two-digit year number and specify the format as y or yy, then the pivot year determines the century to which the year belongs.
- Use one or more u characters instead of y characters to represent the year when working with year numbers near zero.
- Datetime values later than 144683 years CE or before 140743 BCE display only the year numbers, regardless of the specified format value.

Time Zone Offset Formats

Use these identifiers to specify the display format of the time zone offset. A time zone offset is the amount of time that a specific date and time is offset from UTC. This is different from a time zone, which comprises rules that determine the offsets for specific times of the year. Include a time zone offset identifier when you want to ensure that the time components are displayed unambiguously.

Letter Identifier	Description	Display
z	Abbreviated name of the time zone offset. If this value is not available, then the time zone offset uses the short UTC format, such as UTC-4.	EDT

Letter Identifier	Description	Display
Z	ISO 8601 basic format with hours, minutes, and optional seconds fields.	-0400
ZZZZ	Long UTC format.	UTC-04:00
ZZZZZ	ISO 8601 extended format with hours, minutes, and optional seconds fields. A time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	-04:00
x or X	ISO 8601 basic format with hours field and optional minutes field. If you specify X, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	-04
xx or XX	ISO 8601 basic format with hours and minutes fields. If you specify XX, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	-0400
xxx or XXX	ISO 8601 extended format with hours and minutes fields. If you specify XXX, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	-04:00
xxxx or XXXX	ISO 8601 basic format with hours, minutes, and optional seconds fields. If you specify XXXX, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	-0400
xxxxx or XXXXX	ISO 8601 extended format with hours, minutes, and optional seconds fields. If you specify XXXXX, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	-04:00

`TickLabelFormatMode` — Selection mode for `TickLabelFormat` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickLabelFormat` property, specified as one of these values:

- `'auto'` — Automatically select the tick label format.
- `'manual'` — Use a tick label format that you specify. To specify the format, set the `TickLabelFormat` property.

`TickLabelRotation` — Rotation of tick labels

scalar value in degrees

Rotation of tick labels, specified as a scalar value in degrees. Positive values give counterclockwise rotation. Negative values give clockwise rotation.

Alternatively, you can rotate the tick labels using the `xtickangle`, `ytickangle`, and `ztickangle` functions.

Note: The `TickLabelRotation` property for the ruler and the associated `XTickLabelRotation`, `YTickLabelRotation`, or `ZTickLabelRotation` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.TickLabelRotation = 45;`

Example: `ax.YAxis.TickLabelRotation = -45;`

`TickLabelRotationMode` — Selection mode for `TickLabelRotation` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickLabelRotation` property, specified as one of these values:

- `'auto'` — Automatically select the tick label rotation.
- `'manual'` — Use a tick label rotation that you specify. To specify the rotation, set the `TickLabelRotation` property.

`TickDirection` — Tick mark direction

`'in'` (default) | `'out'` | `'both'`

Tick mark direction, specified as one of these values:

- `'in'` — Direct the tick marks inward from the axis lines. This is the default for 2-D views.

- `'out'` — Direct the tick marks outward from the axis lines. This is the default for 3-D views.
- `'both'` — Center the tick marks over the axis lines.

If you assign a value to this property, then MATLAB sets the `TickDirectionMode` property to `'manual'`.

Note: Setting the `TickDir` property for the parent axes sets the `TickDirection` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.YAxis.TickDirection = 'out';`

`TickDirectionMode` — Selection mode for `TickDirection` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickDirection` property, specified as one of these values:

- `'auto'` — Automatically select the tick direction.
- `'manual'` — Use a tick direction that you specify. To specify the tick direction, set the `TickDirection` property.

`TickLength` — Tick mark length

two-element vector

Tick mark length, specified as a two-element vector of the form `[2Dlength 3Dlength]`. The first element is the tick mark length in 2-D views. The second element is the tick mark length in 3-D views. Specify the values in units normalized relative to the longest axes dimension.

Note: Setting the `TickLength` property for the parent axes sets the `TickLength` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.YAxis.TickLength = [0.02 0.035];`

`MinorTick` — Minor tick mark display

`'off'` (default) | `'on'`

Minor tick mark display, specified as one of these values:

- `'off'` — Do not display minor tick marks. This is the default value for an axis with a linear scale.
- `'on'` — Display minor tick marks between the major tick marks on the axis. This is the default value for an axis with a log scale. The space between the major tick marks determines the number of minor tick marks. If the `MinorTickValues` property is set to empty `[]`, then no minor tick marks appear. Specify the tick mark locations by setting the `MinorTickValues` property.

Note: The `MinorTick` property for the ruler and the associated `XMinorTick`, `YMinorTick`, or `ZMinorTick` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.MinorTick = 'on';`

`MinorTickValues` — Minor tick mark locations

`[]` (default) | vector of increasing values

Minor tick mark locations, specified as a vector of increasing datetime values.

If you assign values to this property, then MATLAB sets the `MinorTickValuesMode` property to `'manual'`.

`MinorTickValuesMode` — Selection mode for `MinorTickValues` property

`'auto'` (default) | `'manual'`

Selection mode for the `MinorTickValues` property, specified as one of these values:

- `'auto'` — Use automatically calculated minor tick values.
- `'manual'` — Use minor tick values that you specify. To specify the values, set the `MinorTickValues` property.

Font

`FontName` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as a system supported font name or `'FixedWidth'`. The default font depends on the specific system and locale. To use a fixed-width font that renders well, specify `'FixedWidth'`. The actual fixed-width font used depends on the `FixedWidthFontName` property of the root object.

Note: Setting the `FontName` property for the parent axes sets the `FontName` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontName = 'Cambria';`

`FontSize` — Font size

`10` (default) | scalar numeric value

Font size, specified as a scalar numeric value.

Note: Setting the `FontSize` property for the parent axes sets the `FontSize` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontSize = 12;`

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font.
- `'bold'` — Thicker character outlines than normal.

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: Setting the `FontWeight` property for the parent axes sets the `FontWeight` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontWeight = 'bold';`

`FontAngle` — Text character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font can look the same as the normal font.

Note: Setting the `FontAngle` property for the parent axes sets the `FontAngle` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontAngle = 'italic';`

`FontSmoothing` — Text antialiasing

`'on'` (default) | `'off'`

Text smoothing, specified as one of these values:

- `'on'` — Enable text antialiasing to reduce the jagged appearance of text characters and make the text easier to read. In certain cases, smoothed text blends against the background color and can make the text appear blurry.
- `'off'` — Disable text antialiasing. Use this setting if the text seems blurry.

Note: Setting the `FontSmoothing` property for the parent axes sets the `FontSmoothing` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontSmoothing = 'off';`

Parent/Child

`Parent` — Ruler parent

`Axes` object

Ruler parent, specified as an `Axes` object.

Note: Ruler objects are not listed in the `Children` property of the parent `Axes` object.

`Children` — Ruler children

empty `GraphicsPlaceholder` array

The ruler has no children. You cannot set this property.

See Also

See Also

Axes Properties

Introduced in R2016b

datevec

Convert date and time to vector of components

The `datevec` function creates a numeric array whose values represent the date and time components of years, months, days, hours, minutes, and seconds. However, the best way to represent points in time is by using the `datetime` data type. The best way to represent elapsed time is by using the `duration` or `calendarDuration` data types.

Syntax

```
DateVector = datevec(t)
DateVector = datevec(DateNumber)

DateVector = datevec(DateString)
DateVector = datevec(DateString,formatIn)
DateVector = datevec(DateString,PivotYear)
DateVector = datevec(DateString,formatIn,PivotYear)

[Y,M,D,H,MN,S] = datevec( ___ )
```

Description

`DateVector = datevec(t)` converts the datetime values in `datetime` array `t` to date vectors. `datevec` returns an `m`-by-6 matrix where each row corresponds to a datetime value in `t`.

`DateVector = datevec(DateNumber)` converts one or more date numbers to date vectors. `datevec` returns an `m`-by-6 matrix containing `m` date vectors, where `m` is the total number of date numbers in `DateNumber`.

`DateVector = datevec(DateString)` converts text representing dates and times to date vectors. If the format used in the text is known, specify the format as `formatIn`. Syntaxes without `formatIn` are significantly slower than those that include it.

`DateVector = datevec(DateString,formatIn)` uses `formatIn` to interpret the dates and times represented by `DateString`.

`DateVector = datevec(DateString,PivotYear)` uses `PivotYear` to interpret text that specifies the year as two characters. If the format used in the text is known, specify the format as `formatIn`. Syntaxes without `formatIn` are significantly slower than those that include it.

`DateVector = datevec(DateString,formatIn,PivotYear)` uses `formatIn` to interpret the dates and times represented by `DateString`, and `PivotYear` to interpret text that specifies the year as two characters. You can specify `formatIn` and `PivotYear` in either order.

`[Y,M,D,H,MN,S] = datevec( ___ )` returns the components of the date vector as individual variables `Y`, `M`, `D`, `H`, `MN`, and `S` (year, month, day, hour, minutes and seconds). `datevec` returns milliseconds as a fractional part of the seconds (`S`) output.

Examples

Convert datetime Array to Date Vectors

```
format short g

t = [datetime('now');datetime('tomorrow')]
```

```
t = 2×1 datetime array
   24-Feb-2017 13:08:16
   25-Feb-2017 00:00:00
```

```
DateVector = datevec(t)
```

```
DateVector =
         2017           2          24          13           8      16.068
         2017           2          25           0           0           0
```

Convert Date Number to Date Vector

```
format short g

n = 733779.651;
datevec(n)
```

```
ans =
```

```
        2009           1           6          15          37        26.4
```

Convert Text Representing Date to Date Vector

```
DateString = '28.03.2005';
formatIn = 'dd.mm.yyyy';
datevec(DateString,formatIn)
```

```
ans =

        2005           3          28           0           0           0
```

`datevec` returns a date vector for text representing a date with the format `'dd.mm.yyyy'`.

Convert Multiple Date Strings to Date Vectors

Pass multiple dates as character vectors in a cell array. All input dates must use the same format.

```
DateString = {'09/16/2007';'05/14/1996';'11/29/2010'};
formatIn = 'mm/dd/yyyy';
datevec(DateString,formatIn)
```

```
ans =

        2007           9          16           0           0           0
        1996           5          14           0           0           0
        2010          11          29           0           0           0
```

Convert Date with Milliseconds to Date Vector

```
datevec('11:21:02.647','HH:MM:SS.FFF')
```

```
ans =

   1.0e+03 *

    2.0170    0.0010    0.0010    0.0110    0.0210    0.0026
```

In the output date vector, milliseconds are a fractional part of the seconds field. The text `'11:21:02.647'` does not contain enough information to convert to a full date vector. The days default to 1, months default to January, and years default to the current year.

Convert Date String to Date Vector Using Pivot Year

Convert text representing a date to a date vector using the default pivot year.

```
DateString = '12-jun-17';
formatIn = 'dd-mmm-yy';
DateVector = datevec(DateString,formatIn)
```

```
DateVector =

        2017           6          12           0           0           0
```

Convert the same date to a date vector using 1800 as the pivot year.

```
DateVector = datevec(DateString,formatIn,1800)
```

```
DateVector =

        1817           6          12           0           0           0
```

Assign Elements of Returned Date Vector

Convert text representing a date to a date vector and return the components of the date vector.

```
[y, m, d, h, mn, s] = datevec('01.02.12','dd.mm.yy')
```

```
y = 2012

m = 2

d = 1

h = 0

mn = 0

s = 0
```

Input Arguments

`t` — `datetime` values

scalar | vector | matrix | multidimensional array

`datetime` values, specified as a scalar, vector, matrix, or multidimensional `datetime` array.

`DateNumber` — Serial date number

scalar | vector | multidimensional array

Serial date number, specified as a scalar, vector, or multidimensional array of positive double-precision numbers.

Example: `731878`

Data Types: `double`

`DateString` — Text representing dates and times

character array | 1–D cell array of character vectors

Text representing dates and times, specified as a character array where each row contains text representing one point in time, or as a one dimensional cell array of character vectors. All rows of a character array, or all elements of a cell array, must have the same format.

Example: `'24–Oct-2003 12:45:07'`

Example: `['19-Sep-2013';'20-Sep-2013';'21-Sep-2013']`

Example: `{'15-Oct-2010' '20-Nov-2012'}`

If the format used in the text is known, you should also specify `formatIn`. If you do not specify `formatIn`, `DateString` must be in one of the following formats.

Format of Text Representing Dates and Times	Example
`'dd-mmm-yyyy HH:MM:SS'`	`01-Mar-2000 15:45:17`
`'dd-mmm-yyyy'`	`01-Mar-2000`
`'mm/dd/yyyy'`	`03/01/2000`
`'mm/dd/yy'`	`03/01/00`
`'mm/dd'`	`03/01`
`'mmm.dd,yyyy HH:MM:SS'`	`Mar.01,2000 15:45:17`

Format of Text Representing Dates and Times	Example
'mmm.dd,yyyy'	Mar.01,2000
'yyyy-mm-dd HH:MM:SS'	2000-03-01 15:45:17
'yyyy-mm-dd'	2000-03-01
'yyyy/mm/dd'	2000/03/01
'HH:MM:SS'	15:45:17
'HH:MM:SS PM'	3:45:17 PM
'HH:MM'	15:45
'HH:MM PM'	3:45 PM

Note: The symbolic identifiers describing date and time formats are different from those that describe the display formats of `datetime` arrays.

Certain formats might not contain enough information to convert text representations of dates and times. In those cases, hours, minutes, and seconds default to 0, days default to 1, months default to January, and years default to the current year. `datevec` and `datenum` consider two-character years (e.g., `'79'`) to fall within the 100-year range centered around the current year.

When you do not specify `formatIn`, note the following:

- For the formats that specify the month as two digits (`mm`), the month value must not be greater than 12.
- However, for the format `'mm/dd/yy'`, if the first entry in the text is greater than 12 and the second entry is less than or equal to 12, then `datevec` considers the text to be in `'yy/mm/dd'` format.

`formatIn` — Format of the input text representing dates and times

character vector

Format of the input text representing dates and times, specified as a character vector of symbolic identifiers.

The following table shows symbolic identifiers you can use to construct the `formatIn` character vector. You can include characters such as a hyphen, space, or colon to separate the fields.

Note: The symbolic identifiers describing date and time formats are different from those that describe the display formats of `datetime` arrays.

Symbolic Identifier	Description	Example
`yyyy`	Year in full	`1990`, `2002`
`yy`	Year in two digits	`90`, `02`
`QQ`	Quarter year using letter `Q` and one digit	`Q1`
`mmmm`	Month using full name	`March`, `December`
`mmm`	Month using first three letters	`Mar`, `Dec`
`mm`	Month in two digits	`03`, `12`
`m`	Month using capitalized first letter	`M`, `D`
`dddd`	Day using full name	`Monday`, `Tuesday`
`ddd`	Day using first three letters	`Mon`, `Tue`
`dd`	Day in two digits	`05`, `20`
`d`	Day using capitalized first letter	`M`, `T`
`HH`	Hour in two digits (no leading zeros when symbolic identifier `AM` or `PM` is used)	`05`, `5 AM`
`MM`	Minute in two digits	`12`, `02`
`SS`	Second in two digits	`07`, `59`
`FFF`	Millisecond in three digits	`057`
`AM or PM`	`AM` or `PM` inserted in text representing time	`3:45:02 PM`

The `formatIn` value must follow these guidelines:

- You cannot specify any field more than once. For example, you cannot use `'yy-mmm-dd-m'` because it has two month identifiers. The one exception to this is that you can combine one instance of `dd` with one instance of any of the other day identifiers. For example, `'dddd mmm dd yyyy'` is a valid input.
- When you use `AM` or `PM`, the `HH` field is also required.

- `datevec` does not accept formats that include `'QQ'`

`PivotYear` — Start year of 100-year date range
present minus 50 years (default) | integer

Start year of the 100-year date range in which a two-character year resides, specified as an integer. Use a pivot year to interpret dates that specify the year as two characters.

If `formatIn` contains the time of day, the pivot year is computed from the current time of the current day, month, and year. Otherwise it is computed from midnight of the current day, month, and year.

Example: `2000`

Note: If the input date format specifies a four-character year, then the last two characters are truncated, and the *first* two characters specify the year. For example, if the date and pivot year are specified as `('25122015','ddmmyyyy',2000)`, then the resulting date is `25-12-2020`, not `25-12-2015`.

Data Types: `double`

Output Arguments

`DateVector` — Date vectors
vector | matrix

Date vectors, returned as an `m`-by-6 matrix, where each row corresponds to one date vector, and `m` is the total number of input date numbers or character vectors representing dates and times.

`[Y,M,D,H,MN,S]` — Components of the date vector
scalar

Components of the date vector (year, month, day, hour, minute, and second), returned as individual scalar variables. Each variable is a scalar or a vector. Milliseconds are a fractional part of the seconds output. When converting a `datetime` array `t`, these components are equal to the values of the `Year`, `Month`, `Day`, `Hour`, `Minute`, and `Second` properties. For example, `Y = t.Year`.

Limitations

- When computing date vectors, `datevec` sets month values less than 1 to 1. Day values, `D`, less than 1 are set to the last day of the previous month minus `|D|`. However, if $0 \leq$ `DateNumber` < 1, then `datevec(DateNumber)` returns a date vector of the form `[0 0 0 H MN S]`, where `H`, `MN`, and `S` are hours, minutes, and seconds, respectively.

Tips

- The vectorized calling syntax can offer significant performance improvement for large arrays.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`datenum` | `datestr` | `datetime`

Topics

“Represent Dates and Times in MATLAB”
“Carryover in Date Vectors and Strings”

Introduced before R2006a

day

Day number or name

Syntax

```
d = day(t)
d = day(t,dayType)
```

Description

`d = day(t)` returns the day-of-month numbers for the datetime values in `t`. The `d` output contains integer values from 1 to 31, depending on the month and year.

`d = day(t,dayType)` returns the type of day number or name specified by `dayType`.

The `day` function returns the day numbers or names of datetime values. To assign day values to datetime array `t`, use `t.Day` and modify the Day property.

Examples

Extract Day Number from Dates

Extract the day of month numbers from an array of dates.

```
t = [datetime('yesterday');datetime('today');datetime('tomorrow')]
```

```
t = 3×1 datetime array
   23-Feb-2017
   24-Feb-2017
   25-Feb-2017
```

```
d = day(t)
```

```
d =

    23
    24
```

```
25
```

Determine Day of Week

Determine the day of the week for an arbitrary date, by specifying `'name'` as the second input to the `day` function.

```
t = datetime(2014,05,16)
```

```
t = datetime
   16-May-2014
```

```
d = day(t,'name')
```

```
d = cell
    'Friday'
```

Alternatively, specify `'dayofweek'` to return the day of the week as a number.

```
d = day(t,'dayofweek')
```

```
d = 6
```

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

`dayType` — Type of day values

`'dayofmonth'` (default) | `'dayofweek'` | `'dayofyear'` | `'name'` | `'shortname'`

Type of day values, specified as a value in the table.

Value of `dayType`	Description
`'dayofmonth'`	Day-of-month number, from 1 to 28, 29, 30, or 31. The range depends on the month.

Value of dayType	Description
'dayofweek'	Day-of-week number, from 1 to 7, where day 1 of the week is Sunday.
'dayofyear'	Day-of-year number, from 1 to 365 or 366, depending on the year.
'name'	Full day names, for example, Sunday. For NaT datetime values, the day name is the empty character vector, ''.
'shortname'	Abbreviated day names, for example, Sun. For NaT datetime values, the day name is the empty character vector, ''.

Note: day returns day names in the language specified by the **Locale** option in the **Datetime format** section of the Preferences panel. To change the default datetime locale, see "Set Command Window Preferences".

Output Arguments

d — Day number or name
double array | cell array of character vectors

Day number or name, returned as a numeric array of integers of type double, or a cell array of character vectors. d is the same size as t.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

See Also

See Also

datetime Properties | `isweekend` | `month` | `quarter` | `week` | `year` | `ymd`

Introduced in R2014b

days

Duration in days

Syntax

```
D = days(X)
```

Description

`D = days(X)` returns an array of days equivalent to the values in `X`.

- If `X` is a numeric array, then `D` is a `duration` array in units of fixed-length days. A fixed-length day is equal to 24 hours.
- If `X` is a `duration` array, then `D` is a `double` array with each element equal to the number of fixed-length (24-hour) days in the corresponding element of `X`.

The `days` function converts between `duration` and `double` values. To display a duration in units of days, set its `Format` property to `'d'`.

Examples

Create Duration Array of Fixed-Length Days

```
X = magic(2);
D = days(X)
```

```
D = 2×2 duration array
    1 day   3 days
   4 days   2 days
```

Add each number of fixed-length days to the current date and time.

```
t = datetime('now') + D
```

```
t = 2×2 datetime array
   25-Feb-2017 13:51:20   27-Feb-2017 13:51:20
   28-Feb-2017 13:51:20   26-Feb-2017 13:51:20
```

Convert Durations to Numeric Array of Days

Create a `duration` array.

```
X = hours(23:20:95) + minutes(45)
```

```
X = 1×4 duration array
   23.75 hr   43.75 hr   63.75 hr   83.75 hr
```

Convert each duration in `X` to a number of days.

```
D = days(X)
```

```
D =

    0.9896    1.8229    2.6563    3.4896
```

Input Arguments

X — Input array
numeric array | duration array | logical array

Input array, specified as a numeric array, duration array, or logical array.

Tips

- `days` creates fixed-length (24 hour) days. To create days that account for Daylight Saving Time shifts when used in calendar calculations, use the `caldays` function.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`caldays` | `duration`

Introduced in R2014b

dbclear

Remove breakpoints

Syntax

```
dbclear all
```

```
dbclear in file
dbclear in file at location
```

```
dbclear if condition
```

Description

`dbclear all` removes all breakpoints in all MATLAB code files, and all breakpoints set for errors, caught errors, caught error identifiers, warnings, warning identifiers, and `naninf`.

`dbclear in file` removes all breakpoints in the specified file. The `in` keyword is optional.

`dbclear in file at location` removes the breakpoint set at the specified location in the specified file. The `at` and `in` keywords are optional.

`dbclear if condition` removes all breakpoints set using the specified `condition`, such as `dbstop if error` or `dbstop if naninf`.

Examples

Clear Breakpoints in File

Set and then clear breakpoints in a program file.

Create a file, `buggy.m`, that contains these statements.

```
function z = buggy(x)
```

```
n = length(x);
z = (1:n)./x;
```

Add breakpoints at line 2 and line 3. List all breakpoints using `dbstatus`.

```
dbstop in buggy at 2
dbstop in buggy at 3
dbstatus
```

```
Breakpoints for buggy are on lines  2, 3.
```

Remove all the breakpoints in `buggy.m`. Call `dbstatus` to confirm that all breakpoints are cleared.

```
dbclear in buggy
dbstatus
```

Clear Breakpoints in File at Location

Set and then clear breakpoints in a program file at a certain location.

Create a file, `buggy.m`, that contains these statements.

```
function z = buggy(x)
n = length(x);
z = (1:n)./x;
```

Add breakpoints at line 2 and line 3. List all breakpoints using `dbstatus`.

```
dbstop in buggy at 2
dbstop in buggy at 3
dbstatus
```

```
Breakpoints for buggy are on lines  2, 3.
```

Remove the breakpoint at line 3 and call `dbstatus`.

```
dbclear in buggy at 3
dbstatus
```

```
Breakpoint for buggy is on line 2.
```

Clear Error Breakpoints

Set and clear an error breakpoint.

Create a file, `buggy.m`, that requires an input vector.

```
function z = buggy(x)
n = length(x);
z = (1:n)./x;
```

Set an error breakpoint, and call `buggy` with a matrix input instead of a vector.

```
dbstop if error
buggy(magic(3))
```

A run-time error occurs, and MATLAB goes into debug mode, pausing at line 3 in `buggy.m`.

```
Error using  ./
Matrix dimensions must agree.

Error in buggy at 3
z = (1:n)./x;
3   z = (1:n)./x;
```

Call `dbquit` to exit debug mode.

Clear the breakpoint, and call `buggy` again with a matrix input instead of a vector.

```
dbclear if error
buggy(magic(3))
```

A run-time error occurs, and MATLAB stops execution immediately, without going into debug mode.

```
Error using  ./
Matrix dimensions must agree.

Error in buggy (line 3)
z = (1:n)./x;
```

- "Debug a MATLAB Program"

Input Arguments

`file` — File name

character vector

File name, specified as a character vector. The file name can include a partial path, but must be in a folder on the search path, or in the current folder.

Example: `myfile.m`

If the file name is followed by the `-completenames` option, then the file does not need to be on the search path, as long as the file name is a fully qualified name.

Example: `c:\Program Files\MATLAB\myfile.m -completenames`

In addition, `file` can include a filemarker (>) to specify the path to a particular local function or to a nested function within the file.

Example: `myfile>myfunction`

`location` — Location in `file`

line number | line number and anonymous function number | local function name

Location in `file` of breakpoint to clear, specified as follows:

- Line number in `file`. The default is `1`.
- Line number in `file`, followed by the `@` symbol and an anonymous function number. For example, `1@2` specifies the second anonymous function on line number 1. If no anonymous function number is specified, the default is `1`.
- Name of a local function in `file`.

`condition` — Type of error breakpoint

`error` | `caught error` | `warning` | `naninf` | `...`

Type of error breakpoint, specified as follows:

- `error` — Run-time error that occurs outside a `try/catch` block. If you want to clear a breakpoint set for a specific error, specify the message id. For example:
  - `dbclear if error` clears all breakpoints set with the `dbstop if error` command, including breakpoints with a specified message id.
  - `dbclear if error MATLAB:ls:InputsMustBeStrings` clears the error with a message ID of `MATLAB:ls:InputsMustBeStrings`.
- `caught error` — Run-time error that occurs within the `try` portion of a `try/catch` block. If you want to clear a breakpoint set for a specific error, specify the message id.
- `warning` — Run-time warning. If you want to clear a breakpoint set for a specific warning, specify the message id.

This condition has no effect if you disable warnings with the `warning off all` command or if you disable warnings for the specified message id. For more information about disabling warnings, see `warning`.

- `naninf` — Not-a-number error or infinite value error. These errors occur when code returns an infinite value (`Inf`) or a value that is not a number (`NaN`) as a result of an operator, function call, or scalar assignment.

See Also

See Also

`dbquit` | `dbstack` | `dbstatus` | `dbstop` | `filemarker`

Topics

"Debug a MATLAB Program"

Introduced before R2006a

dbcont

Resume execution

Syntax

```
dbcont
```

Description

`dbcont` resumes execution of a MATLAB code file after pausing. Execution continues until another breakpoint is encountered, a pause condition is met, an error occurs, or execution completes successfully.

Note: If you want to edit a file as a result of debugging, it is a good practice to first quit debugging. Otherwise, you can get unexpected results.

Examples

Resume Execution While Debugging

Resume the execution of a program while debugging using the `dbcont` command.

Create a file, `buggy.m`, that contains these statements.

```
function z = buggy(x)
n = length(x);
z = (1:n)./x;
```

Add a breakpoint at line 2 and run the code. MATLAB pauses execution at the breakpoint.

```
dbstop in buggy at 2
buggy(5)
```

Run the `dbcont` command to continue execution to the end of the program and end debugging,

`dbcont`

- "Debug a MATLAB Program"

See Also

See Also

`dbclear` | `dbquit` | `dbstatus` | `dbstep` | `dbstop`

Topics

"Debug a MATLAB Program"

Introduced before R2006a

dbdown

Reverse dbup workspace shift

Syntax

dbdown

Description

dbdown changes the current workspace context to the workspace of the called MATLAB code file in debug mode. You must issue the dbup command at least once before you issue this command. dbdown is the opposite of dbup.

Multiple dbdown commands change the workspace context to each successively executed MATLAB code file on the stack until the current workspace context is the line at which MATLAB is paused. You do not have to move back to the paused line to continue execution or to step to the next line.

Note: Changing the workspace context provides access to variables in the calling function, but does *not* provide access to any other functionality. MATLAB evaluates all expressions using the functions and properties available at the line at which MATLAB is paused.

Examples

View Current and Calling Function Workspaces

Use the dbup and dbdown commands to view the current and calling function workspace of a function.

Create a file, myfile.m, that contains these statements

```
function n = myfile(x)
n = myfunction(x-1);

function z = myfunction(y)
```

```
z = 2 / y ;
```

Set a breakpoint at `myfunction` and run `myfile` with an input of `1`. MATLAB pauses in the function `myfunction`, at the line `z = 2 / y`. Call `whos` to view the variables in the current workspace.

```
dbstop in myfile>myfunction
myfile(1);
whos
```

```
Name      Size            Bytes  Class     Attributes

  y         1x1                 8  double
```

The workspace contains the variable `y`, which is in the workspace context for `myfunction`.

Run the `dbup` command to switch to the workspace of the calling function, `myfile`. Call `whos` to view the variables in the new workspace.

```
dbup
whos
```

```
In workspace belonging to myfile (line 2)

  Name      Size            Bytes  Class     Attributes

  x         1x1                 8  double
```

The workspace contains the variable `x`, which is in the workspace context for `myfile`.

Run the `dbdown` command, and then call `whos`.

```
dbdown
whos
```

```
In workspace belonging to myfile>myfunction (line 5)

  Name      Size            Bytes  Class     Attributes

  y         1x1                 8  double
```

The workspace once again contains the variable `y`, which is in the workspace context for `myfunction`.

- "Examine Values While Debugging"

See Also

See Also

`dbstack` | `dbup` | `whos`

Topics

"Examine Values While Debugging"

Introduced before R2006a

dblquad

Numerically evaluate double integral over rectangle

Compatibility

`dblquad` will be removed in a future release. Use `integral2` instead.

Syntax

```
q = dblquad(fun,xmin,xmax,ymin,ymax)
q = dblquad(fun,xmin,xmax,ymin,ymax,tol)
q = dblquad(fun,xmin,xmax,ymin,ymax,tol,method)
```

Description

`q = dblquad(fun,xmin,xmax,ymin,ymax)` calls the `quad` function to evaluate the double integral `fun(x,y)` over the rectangle `xmin <= x <= xmax`, `ymin <= y <= ymax`. The input argument, `fun`, is a function handle that accepts a vector `x`, a scalar `y`, and returns a vector of integrand values.

"Parameterizing Functions" explains how to provide additional parameters to the function `fun`, if necessary.

`q = dblquad(fun,xmin,xmax,ymin,ymax,tol)` uses a tolerance `tol` instead of the default, which is `1.0e-6`.

`q = dblquad(fun,xmin,xmax,ymin,ymax,tol,method)` uses the quadrature function specified as `method`, instead of the default `quad`. Valid values for `method` are `@quadl` or the function handle of a user-defined quadrature method that has the same calling sequence as `quad` and `quadl`.

Examples

Pass function handle `@integrnd` to `dblquad`:

```
Q = dblquad(@integrnd,pi,2*pi,0,pi);
```

where the function `integrnd.m` is:

```
function z = integrnd(x, y)
z = y*sin(x)+x*cos(y);
```

Pass anonymous function handle `F` to `dblquad`:

```
F = @(x,y)y*sin(x)+x*cos(y);
Q = dblquad(F,pi,2*pi,0,pi);
```

The `integrnd` function integrates `y*sin(x)+x*cos(y)` over the square `pi <= x <= 2*pi`, `0 <= y <= pi`. Note that the integrand can be evaluated with a vector `x` and a scalar `y`.

Nonsquare regions can be handled by setting the integrand to zero outside of the region. For example, the volume of a hemisphere is:

```
dblquad(@(x,y)sqrt(max(1-(x.^2+y.^2),0)), -1, 1, -1, 1)
```

or

```
dblquad(@(x,y)sqrt(1-(x.^2+y.^2)).*(x.^2+y.^2<=1), -1, 1, -1, 1)
```

See Also

See Also

`integral` | `integral2` | `integral3` | `quad` | `quad2d` | `quadgk` | `quadl` | `triplequad`

Topics

"Create Function Handle"
"Anonymous Functions"

Introduced before R2006a

dbmex

Enable MEX-file debugging (on UNIX platforms)

Syntax

```
dbmex on
dbmex off
dbmex stop
```

Description

`dbmex` **`on`** enables MEX-file debugging for UNIX platforms.

To use this option, first start MATLAB from a debugger by typing `matlab -D`*`debugger`*, where *`debugger`* is the name of the debugger program. Invoke `dbmex on` before calling your MEX-file. If you have already loaded the MEX-file, remove it from memory using the `clear` function.

`dbmex` **`off`** disables MEX-file debugging.

`dbmex` **`stop`** returns to the debugger prompt.

See Also

See Also

`dbclear` | `dbstep` | `dbstop`

Topics

"Debugging"
"Debug on Mac Platforms"
"Debug on Linux Platforms"

Introduced before R2006a

dbquit

Quit debug mode

Syntax

```
dbquit
dbquit all
```

Description

`dbquit` terminates debug mode. The Command Window then displays the standard prompt (>>). The file being executed is *not* completed and no results are returned. All breakpoints remain in effect.

If MATLAB is in debug mode for more than one function, `dbquit` only terminates debugging for the active function. For example, if you debug `file1` and also debug `file2`, running `dbquit` terminates debugging for `file2`, while `file1` remains in debug mode until you run `dbquit` again. However, if you debug `file3` and step into `file4`, running `dbquit` terminates debugging for both file.

`dbquit all` ends debugging for all files simultaneously.

Examples

Quit Debugging Multiple Files

Create a file, `buggy.m`, that contains these statements.

```
function z = buggy(x)
n = length(x);
z = (1:n)./x;
```

Create a second file, `buggy2.m`, that contains these statements.

```
function z2 = buggy2(y)
m = length(y);
```

```
z2 = (1:m).*y;
```

Set breakpoints in `buggy` and `buggy2` and run both files. MATLAB pauses at the first line in `buggy` and `buggy2`.

```
dbstop in buggy
dbstop in buggy2
buggy(5)
buggy2(5)
```

Call the `dbstack` command to check the debugging status.

```
dbstack
```

```
In buggy2 (line 2)
In buggy (line 2)
```

Quit debugging. MATLAB ends debugging for `buggy2`, while `buggy` remains in debug mode.

```
dbquit
dbstack
```

```
In buggy (line 2)
```

Run `dbquit` again to exit debug mode for `buggy`.

Alternatively, `dbquit all` ends debugging for both files simultaneously.

- "Debug a MATLAB Program"

See Also

See Also

`dbclear` | `dbcont` | `dbstack` | `dbstatus` | `dbstep` | `dbstop`

Topics

"Debug a MATLAB Program"

Introduced before R2006a

dbstack

Function call stack

Syntax

```
dbstack
dbstack(n)
dbstack(___, '-completenames')
ST = dbstack(___)
[ST,I] = dbstack(___)
```

Description

`dbstack` displays the line numbers and file names of the function calls that led to the current pause condition, listed in the order in which they execute. The display starts with the currently executing functions and continues until it reaches the topmost function. Each line number is a hyperlink to that line in the Editor. The notation `functionname>localfunctionname` describes the location of a local function.

`dbstack(n)` omits the first `n` stack frames from the display. This syntax can be useful, for example, when issuing a `dbstack` from within an error handler.

`dbstack(___, '-completenames')` outputs the fully qualified name of each function in the stack.

You can specify `'-completenames'` with any of the input arguments in the previous syntaxes.

`ST = dbstack(___)` returns the stack trace information in an `m`-by-`1` structure, `ST`.

`[ST,I] = dbstack(___)` also returns `I`, the current workspace index.

Examples

View Stack Trace Information While Debugging

While debugging a MATLAB code file, issue the `dbstack` command to view the stack trace information.

Create a file, `myfile.m`, that contains these statements.

```
function n = myfile(x)
n = myfunction(x-1);
end

function z = myfunction(y)
z = 2 / y;
end
```

Set a breakpoint at `myfunction` and run `myfile` with an input of `1`. While executing `myfunction`, MATLAB pauses at the line `z = 2/y`.

```
dbstop in myfile>myfunction
myfile(1);
```

Run the `dbstack` command. MATLAB displays the line numbers and file names of the function calls that led to the current breakpoint.

```
dbstack
```

```
In myfile>myfunction (line 5)
In myfile (line 2)
```

Store Complete Names for Each Function in Stack

Store the complete file name, function name, and line number for each function in the stack while debugging a file.

Create a file, `myfile.m`, that contains these statements

```
function n = myfile(x)
n = myfunction(x-1);
end

function z = myfunction(y)
z = 2 / y;
```

```
end
```

Set a breakpoint at `myfunction` and run `myfile` with an input of `1`. While executing `myfunction`, MATLAB pauses at the line `z = 2/y`.

```
dbstop in myfile>myfunction
myfile(1);
```

Run the `dbstack` command, omitting the first frame and requesting complete names. MATLAB returns the stack trace information in the specified structure `ST`.

```
[ST, I] = dbstack('-completenames', 1)
```

```
ST =

    file: 'C:\myProject\myfile.m'
    name: 'myfile'
    line: 2


I =

     1
```

- "Examine Values While Debugging"

Input Arguments

n — Number of frames to omit

nonnegative integer

Number of frames to omit, specified as a nonnegative integer.

Output Arguments

ST — Stack trace information

structure array

Stack trace information, returned as an `m`-by-`1` structure, where `m` is the number of functions in the call stack. The structure has these fields.

`file`	File in which the function appears. This field is empty if there is no file.
`name`	Function name within the file.
`line`	Line number of function call

Note: If you step past the end of a file, `dbstack` returns a negative line number value to identify that special case. For example, if the last line to be executed is line `15`, then the `dbstack` line number is `15` before you execute that line and `-15` after.

`I` — Current workspace index

positive integer

Current workspace index, returned as a positive integer. The index represents the number of workspaces between your current workspace and the workspace in which MATLAB is currently paused or executing.

See Also

See Also

`dbdown` | `dbquit` | `dbstep` | `dbstop` | `dbup` | `evalin` | `mfilename` | `whos`

Topics

"Examine Values While Debugging"

Introduced before R2006a

dbstatus

List all breakpoints

Syntax

```
dbstatus
dbstatus file
dbstatus -completenames
dbstatus file -completenames
b = dbstatus( ___ )
```

Description

`dbstatus` lists all the breakpoints in effect, including errors, caught errors, warnings, and `naninfs`. For non-error breakpoints, MATLAB displays the line number for which the breakpoint is set. Each line number is a hyperlink that you can click to go directly to that line in the Editor.

`dbstatus file` lists all breakpoints in effect for the specified `file`.

`dbstatus -completenames` displays, for each breakpoint, the fully qualified name of the function or file containing the breakpoint.

`dbstatus file -completenames` displays, for each breakpoint in the specified file, the fully qualified name for the function or file containing the breakpoint.

`b = dbstatus( ___ )` returns breakpoint information in an `m`-by-`1` structure. To save the current breakpoints in order to restore them later using `dbstop(b)`, use this syntax. You also can specify the file name and `'completenames'`.

Examples

List All Breakpoints

Create a file, `myfile.m`, that contains these statements.

```
function n = myfile(x)
n = myfunction(x-1);

function z = myfunction(y)
z = 2/y ;
```

Set an error breakpoint, and a standard breakpoint at the first line in `myfile`.

```
dbstop if error
dbstop in myfile
```

Run the `dbstatus` command. MATLAB displays the active breakpoints: the standard breakpoint in`myfile`, and the error breakpoint.

```
dbstatus
```

```
Breakpoint for myfile is on line 2.
Stop if error.
```

List All Breakpoints in File

List all breakpoints in a specified file, showing complete names.

Create a file, `myfile.m`, that contains these statements.

```
function n = myfile(x)
n = myfunction(x-1);

function z = myfunction(y)
z = 2 / y ;
```

Set an error breakpoint and a standard breakpoint at the first line in `myfile`.

```
dbstop if error
dbstop in myfile
```

Run the `dbstatus` command, specifying the file `myfile` and requesting complete names. MATLAB displays the active breakpoints: the standard breakpoint in`myfile`, and the error breakpoint.

```
dbstatus myfile -completenames
```

```
Breakpoint for C:\myProject\myfile.m>myfile is on line 2.
```

Notice that the error breakpoint is not listed. Only breakpoints specific to the specified file are included in the list.

Restore Saved Breakpoints

Set, save, clear, and then restore saved breakpoints.

Create a file, `buggy.m`, which contains these statements.

```
function z = buggy(x)
n = length(x);
z = (1:n)./x;
```

Set an error breakpoint and a standard breakpoint at the second line in `buggy`.

```
dbstop at 2 in buggy
dbstop if error
```

Run `dbstatus`. MATLAB describes the breakpoints you set.

```
dbstatus
```

```
Breakpoint for buggy is on line 2.
Stop if error.
```

Assign a structure representing the breakpoints to the variable `b`, and then save `b` to the MAT-file `buggybrkpnts`. Use `b=dbstatus('-completenames')` to save absolute paths and the breakpoint function nesting sequence.

```
b = dbstatus('-completenames');
save buggybrkpnts b
```

Clear all breakpoints.

```
dbclear all
```

Restore the breakpoints by loading the MAT-file and calling `dbstop` with the saved structure, `b`.

```
load buggybrkpnts
dbstop(b)
```

Input Arguments

`file` — File name
character vector

File name, specified as a character vector. The file name can include a partial path, but must be in a folder on the search path, or in the current folder.

Example: `myfile.m`

When specifying methods, private functions, or private methods, use the `/` character.

Example: `myclass/myfunction`

Example: `private/myfunction`

Example: `myclass/private/myfunction`

In addition, `file` can include a filemarker (>) to specify the path to a particular local function or to a nested function within the file.

Example: `myfile>myfunction`

Output Arguments

b — List of breakpoints

structure array

List of breakpoints currently in effect, returned as a `m`-by-`1` structure, where `m` is the number of breakpoints. This table shows the fields in the structure.

`name`	Function name.
`file`	Full path for file containing breakpoints.
`line`	Vector of breakpoint line numbers.
`anonymous`	Vector of integers representing the anonymous functions in the line numbers represented by the `line` field. For example, `2` means the second anonymous function in that line. A value of `0` means that the breakpoint is at the start of the line, not in an anonymous function.
`expression`	Cell vector of character vectors, containing the breakpoint conditional expressions corresponding to line numbers in the `line` field.
`cond`	Character vector containing the condition (`'error'`, `'caught error'`, `'warning'`, or `'naninf'`).

`identifier`	If `cond` is `'error'`, `'caught error'`, or `'warning'`, a cell vector of character vectors containing MATLAB message identifiers for which the particular `cond` state is set.

See Also

See Also

`dbclear` | `dbcont` | `dbquit` | `dbstop` | `error` | `warning`

Introduced before R2006a

dbstep

Execute next executable line from current breakpoint

Syntax

```
dbstep
dbstep in
dbstep out
dbstep nlines
```

Description

`dbstep` executes the next executable line of the current file during debugging, skipping any breakpoints set in functions called by the current line.

`dbstep in` steps to the next executable line. If that line contains a call to another MATLAB code file function, execution steps to the first executable line of the called function. If there is no call to a MATLAB code file on that line, `dbstep in` is the same as `dbstep`.

`dbstep out` runs the rest of the current function and stops just after leaving the function. MATLAB pauses execution at any breakpoint it encounters.

`dbstep nlines` executes the specified number of executable lines. MATLAB pauses execution at any breakpoint it encounters.

Examples

Step Over Called Functions and Scripts

Create a file, `myfile.m`, that contains these statements.

```
function n = myfile(x)
n = myfunction(x-1);

function z = myfunction(y)
```

```
z = 2 / y ;
```

Set a breakpoint at the first line in `myfile` and run `myfile` with an input of `1`. MATLAB pauses in the function `myfile`, at the line `n = myfunction(x-1)`.

```
dbstop in myfile
myfile(2);
```

```
2   n = myfunction(x-1);
```

Step to the next execution line. MATLAB reaches the end of the function `myfile`.

```
K>> dbstep
```

```
End of function myfile.
```

Step once more to complete the execution of `myfile` and end debugging.

Step Into Called Functions and Scripts

Create a file, `myfile.m`, that contains these statements.

```
function n = myfile(x)
n = myfunction(x-1);

function z = myfunction(y)
z = 2 / y ;
```

Set a breakpoint at the first line in `myfile` and run `myfile` with an input of `1`. MATLAB pauses in the function `myfile`, at the line `n = myfunction(x-1)`.

```
dbstop in myfile
myfile(2);
```

```
2   n = myfunction(x-1);
```

Step into `myfunction`. MATLAB enters `myfunction` and pauses at the first line in the function.

```
K>> dbstep in
```

```
5   z = 2 / y;
```

Step through the next four lines of code, completing the execution of `myfile` and ending debugging.

```
K>> dbstep 4

ans =

   2
```

Step In and Out of a Program Entering All Local Function

Create a file, `myfile.m`, that contains these statements.

```
function n = myfile(x)
n = myfunction(x-1);

function z = myfunction(y)
z = 2 / y ;
```

Set a breakpoint at the first line in `myfile` and run `myfile` with an input of `1`. MATLAB pauses in the function `myfile`, at the line `n = myfunction(x-1)`.

```
dbstop in myfile
myfile(2);
```

Step into `myfunction`. MATLAB enters `myfunction` and pauses at the first line in the function.

```
K>> dbstep in

5   z = 2 / y;
```

Step out of `myfunction`. MATLAB finishes executing `myfunction` and returns to the calling function `myfile`.

```
K>> dbstep out

2   n = myfunction(x-1);
```

Step out one more time to complete the execution of `myfile` and end debugging.

- "Debug a MATLAB Program"

Input Arguments

`nlines` — Number of executable lines

positive integer

Number of executable lines to execute, specified as a positive integer.

See Also

See Also

`dbclear` | `dbcont` | `dbquit` | `dbstatus` | `dbstop`

Topics

"Debug a MATLAB Program"

Introduced before R2006a

dbstop

Set breakpoints for debugging

Syntax

```
dbstop in file
dbstop in file at location
dbstop in file if expression
dbstop in file at location if expression

dbstop if condition

dbstop(b)
```

Description

`dbstop in file` sets a breakpoint at the first executable line in `file`. When you run `file`, MATLAB enters debug mode, pauses execution at the breakpoint, and displays the line where it is paused.

`dbstop in file at location` sets a breakpoint at the specified location. MATLAB execution pauses immediately before that location, unless the location is an anonymous function. If the location is an anonymous function, then execution pauses just after the breakpoint.

`dbstop in file if expression` sets a conditional breakpoint at the first executable line of the file. Execution pauses only if `expression` evaluates to true `(1)`.

`dbstop in file at location if expression` sets a conditional breakpoint at the specified location. Execution pauses at or just before that location only if the `expression` evaluates to true.

`dbstop if condition` pauses execution at the line that meets the specified `condition`, such as `error` or `naninf`. Unlike other breakpoints, you do not set this breakpoint at a specific line in a specific file. MATLAB stops at any line in any file when the specified `condition` occurs.

`dbstop(b)` restores breakpoints you previously saved to `b`. The files containing the saved breakpoints must be on the search path or in the current folder. MATLAB assigns breakpoints by line number, so the lines in the file must be the same as when you saved the breakpoints.

Examples

Stop at First Executable Line

Set a breakpoint and pause execution at the first executable line of a program.

Create a file, `buggy.m`, that contains these statements.

```
function z = buggy(x)
n = length(x);
z = (1:n)./x;
```

Issue the `dbstop` command and run `buggy`.

```
dbstop in buggy
buggy(1:5)
```

MATLAB displays the line where it pauses and enters debug mode.

```
2   n = length(x);
K>>
```

Type `dbquit` to exit debug mode.

Stop at Function in File

Set a breakpoint in a program at the first executable line of a local function.

Create a file, `myfile.m`, that contains these statements

```
function n = myfile(x)
n = myfunction(x);

function y = myfunction(x)
y = x + 1;
```

Set a breakpoint at `myfunction`.

```
dbstop in myfile>myfunction
```

Stop in File After *n* Iterations of a Loop

Set a breakpoint in a program that causes MATLAB to pause after some iterations of a loop.

Create a file, `myprogram.m`, that contains these statements

```
x = ones(1,10);

for n = 1:10
x(n) = x(n) + 1;
end
```

Set a breakpoint to stop when `n >= 4`, and run the code.

```
dbstop in myprogram at 4 if n>=4
myprogram
```

MATLAB pauses at line 4 after 3 iterations of the loop, when `n = 4`.

```
4   x(n) = x(n) + 1;
K>>
```

Type `dbquit` to exit debug mode.

Stop If Error

Set a breakpoint and pause execution if a run-time error occurs.

Create a file, `mybuggyprogram.m`, that contains these statements.

```
x = ones(1,10);

for n = 1:10
x(n) = x(n+1) + 1;
end
```

Set an error breakpoint, and call `mybuggyprogram`.

```
dbstop if error
mybuggyprogram
```

A run-time error occurs, and MATLAB goes into debug mode, pausing at line 4 in `mybuggyprogram.m`.

```
Index exceeds matrix dimensions.
Error in mybuggyprogram (line 4)
x(n) = x(n+1) + 1;
4   x(n) = x(n+1) + 1;
```

Type `dbquit` to exit debug mode.

Stop If NanInf

Set a breakpoint and pause execution if the code returns a NaN value.

Create a file, `buggy.m`, that requires an input vector.

```
function z = buggy(x)
n = length(x);
z = (1:n)./x;
```

Set a warning breakpoint, and call `buggy` with an input vector containing a `0` as one of its elements.

```
dbstop if naninf
buggy(0:2)
```

A division by zero error occurs, and MATLAB goes into debug mode, pausing at line 3 in `buggy.m`.

```
NaN/Inf breakpoint hit for buggy on line 3.
```

Type `dbquit` to exit debug mode.

Restore Saved Breakpoints

Set, save, clear, and then restore saved breakpoints.

Create a file, `buggy.m`, which contains these statements.

```
function z = buggy(x)
n = length(x);
z = (1:n)./x;
```

Set an error breakpoint and a standard breakpoint at the second line in `buggy`.

```
dbstop at 2 in buggy
dbstop if error
```

Run `dbstatus`. MATLAB describes the breakpoints you set.

```
dbstatus
```

```
Breakpoint for buggy is on line 2.
Stop if error.
```

Assign a structure representing the breakpoints to the variable `b`, and then save `b` to the MAT-file `buggybrkpnts`. Use `b=dbstatus('-completenames')` to save absolute paths and the breakpoint function nesting sequence.

```
b = dbstatus('-completenames');
save buggybrkpnts b
```

Clear all breakpoints.

```
dbclear all
```

Restore the breakpoints by loading the MAT-file and calling `dbstop` with the saved structure, `b`.

```
load buggybrkpnts
dbstop(b)
```

Input Arguments

`file` — File name

character vector

File name, specified as a character vector. The file name can include a partial path, but must be in a folder on the search path or in the current folder.

Example: `myfile.m`

If the file name includes the `-completenames` option, then the file does not need to be on the search path, as long as the file name is a "Fully Qualified Name" on page 1-2357.

Example: `c:\Program Files\MATLAB\myfile.m -completenames`

In addition, `file` can include a filemarker (>) to specify the path to a particular local function or to a nested function within the file.

Example: `myfile>myfunction`

If `file` is not a MATLAB code file (for instance, it is a built-in or MDL-file), then MATLAB issues a warning. MATLAB cannot stop *in* the file, so it pauses before executing the file.

`location` — Location in `file` to set a breakpoint

line number | line number and anonymous function number | local function name

Location in `file` to set a breakpoint, specified as one of these options:

- Line number in `file` specified as a character vector. The default is `1`.
- Line number in `file`, at the anonymous function number, specified as a character vector. For example, `1@2` specifies line number 1, at the second anonymous function. The default anonymous function number is `1`.
- Name of a local function in `file`, specified as a character vector.

Note: When setting a breakpoint, you cannot specify `location` if `file` includes a filemarker. For example, the command `dbstop in myfile>myfilefunction at 5` is invalid.

`expression` — Code that evaluates to scalar logical value 1 or 0

character vector

Code that evaluates (as if by `eval`) to a scalar logical value of `1` or `0`, (true or false, respectively), specified as a character vector.

Example: `n >= 4`

`condition` — Statement that causes execution to pause when that condition evaluates to true

`error` | `caught error` | `warning` | `naninf` | `...`

Statement that causes execution to pause when that condition evaluates to true, specified as one of these options:

- `error` — Run-time error that occurs outside a `try/catch` block. You cannot resume execution after an uncaught run-time error.

  If you want execution to pause only if a specific error occurs, specify the message id. For example:

  - `dbstop if error` stops execution at the first run-time error that occurs outside a `try/catch` block.
  - `dbstop if error MATLAB:ls:InputsMustBeStrings` pauses execution at the first run-time error outside a `try/catch` block that has a message ID of `MATLAB:ls:InputsMustBeStrings`.

- `caught error` — Run-time error that occurs within the `try` portion of a `try/catch` block. If you want execution to stop only if a specific error occurs, specify the message id.
- `warning` — Run-time warning occurs. If you want execution to pause only if a specific warning occurs, specify the message id.

  This condition has no effect if you disable warnings with the `warning off all` command or if you disable warnings for the specified `id`. For more information about disabling warnings, see `warning`.
- `naninf` — The code returns an infinite value (`Inf`) or a value that is not a number (`NaN`) as a result of an operator, function call, or scalar assignment.

`b` — List of breakpoints

structure array

List of breakpoints previously saved to a structure array using `b=dbstatus`.

Definitions

Fully Qualified Name

A fully qualified name is an exact file name that is uniquely specified such that it cannot be mistaken for any other file on your system.

- Windows platforms — A file name that begins with two back slashes (`\\`) or with a drive letter followed by a colon (`:`).
- UNIX platforms — A file name that begins with a slash (`/`) or a tilde (`~`).

Tips

- Before you begin debugging, make sure that your program is saved and that the program and any files it calls exist on your search path or in the current folder.
- To resume execution after a breakpoint pauses execution, use `dbcont` or `dbstep`. To exit debug mode, use `dbquit`.
- MATLAB can become unresponsive when it stops at a breakpoint while displaying a modal dialog box or figure created by your program. To exit debug mode and return to the MATLAB prompt (`>>`), use **Ctrl+C**.

See Also

See Also

`dbclear` | `dbcont` | `dbquit` | `dbstack` | `dbstatus` | `dbstep` | `dbtype` | `keyboard`

Topics

"Debug a MATLAB Program"

Introduced before R2006a

dbtype

Display file with line numbers

Syntax

```
dbtype filename
dbtype filename start:end
```

Description

`dbtype filename` displays the contents of `filename` with line numbers preceding each line. This is helpful when setting breakpoints in a program file with `dbstop`. You cannot use `dbtype` to display the source code of built-in functions.

`dbtype filename start:end` displays the portion of the file starting at line number`start` and ending at line number `end`. To display a single line, you can specify only the `start` value.

Examples

View File with Line Numbers

Display the example file `buggy.m` with line numbers preceding each line.

```
dbtype buggy
```

```
1     function z = buggy(x)
2     n = length(x);
3     z = (1:n)./x;
```

View Function Arguments

View the input and output arguments for an example function, `buggy`, by displaying the first line of the file. Since `start` and `end` are the same in this case, you can omit the `end` value.

```
dbtype buggy 1
```

```
1     function z = buggy(x)
```

Input Arguments

`filename` — File name
character vector

File name, specified as a character vector. The file name can be a partial path, but must be in a folder on the search path or in the current folder. Otherwise, specify the full path name.

`start` — Starting line number
positive integer

Starting line number, specified as a positive integer.

`end` — Ending line number
positive integer

Ending line number, specified as a positive integer.

See Also

See Also
`dbclear` | `dbstatus` | `dbstop`

Introduced before R2006a

dbup

Shift current workspace to workspace of caller in debug mode

Syntax

dbup

Description

dbup changes the current workspace context to the workspace of the calling file in debug mode. Then you can examine the calling MATLAB code file to determine what caused the arguments to be passed to the called function.

Each dbup command changes the workspace context to an earlier calling file on the stack until the base workspace context is reached. It is not necessary, however, to return to the line at which MATLAB is paused to continue execution or to step to the next line.

Note: Changing the workspace context provides access to variables in the calling function, but does *not* provide access to any other functionality. MATLAB evaluates all expressions using the functions and properties available at the line at which MATLAB is paused.

Examples

View Current and Calling Function Workspaces

Create a file, myfile.m, that contains these statements

```
function n = myfile(x)
n = myfunction(x-1);

function z = myfunction(y)
z = 2 / y ;
```

Set a breakpoint at myfunction and run myfile with an input of 1. MATLAB pauses in the function myfunction, at the line z = 2 / y. Call whos to view the variables in the current workspace.

```
dbstop in myfile>myfunction
myfile(1);
whos
```

```
Name      Size            Bytes  Class     Attributes

  y         1x1                 8  double
```

The workspace contains the variable `y`, which is in the workspace context for `myfunction`.

Run the `dbup` command to switch to the workspace of the calling function, `myfile`. Then, call `whos`.

```
dbup
whos
```

```
In workspace belonging to myfile (line 2)

  Name      Size            Bytes  Class     Attributes

  x         1x1                 8  double
```

The workspace contains the variable `x`, which is in the workspace context for `myfile`.

- "Examine Values While Debugging"

Tips

- If you receive an error message such as the following, it means that the parent workspace is under construction so that the value of `x` is unavailable:

  ```
  ??? Reference to a called function result under construction x
  ```

See Also

See Also

`dbdown` | `dbstack` | `whos`

Topics

"Examine Values While Debugging"

Introduced before R2006a

dde23

Solve delay differential equations (DDEs) with constant delays

Syntax

```
sol = dde23(ddefun,lags,history,tspan)
sol = dde23(ddefun,lags,history,tspan,options)
```

Arguments

`ddefun`	Function handle that evaluates the right side of the differential equations $y'(t) = f\left(t, y(t), y(t-\tau_1), \ldots, y(t-\tau_k)\right)$. The function must have the form `dydt = ddefun(t,y,Z)` where `t` corresponds to the current t, `y` is a column vector that approximates $y(t)$, and `Z(:,j)` approximates $y(t-\tau_j)$ for delay τ_j = `lags(j)`. The output is a column vector corresponding to $f\left(t, y(t), y(t-\tau_1), \ldots, y(t-\tau_k)\right)$.
`lags`	Vector of constant, positive delays $\tau_1, \ldots, \tau_k$.
`history`	Specify `history` in one of three ways: • A function of t such that `y = history(t)` returns the solution $y(t)$ for $t \le t_0$ as a column vector • A constant column vector, if $y(t)$ is constant • The solution `sol` from a previous integration, if this call continues that integration
`tspan`	Interval of integration from `t0=tspan(1)` to `tf=tspan(end)` with `t0 < tf`.
`options`	Optional integration argument. A structure you create using the `ddeset` function. See `ddeset` for details.

Description

`sol = dde23(ddefun,lags,history,tspan)` integrates the system of DDEs

$$y'(t) = f\left(t, y(t), y(t-\tau_1), \ldots, y(t-\tau_k)\right)$$

on the interval $[t_0,t_f]$, where τ_1, ..., τ_k are constant, positive delays and t_0,t_f. The input argument, `ddefun`, is a function handle.

"Parameterizing Functions" explains how to provide additional parameters to the function `ddefun`, if necessary.

`dde23` returns the solution as a structure `sol`. Use the auxiliary function `deval` and the output `sol` to evaluate the solution at specific points `tint` in the interval `tspan = [t0,tf]`.

```
yint = deval(sol,tint)
```

The structure `sol` returned by `dde23` has the following fields.

`sol.x`	Mesh selected by `dde23`
`sol.y`	Approximation to $y(x)$ at the mesh points in `sol.x`.
`sol.yp`	Approximation to $y'(x)$ at the mesh points in `sol.x`
`sol.solver`	Solver name, `'dde23'`

`sol = dde23(ddefun,lags,history,tspan,options)` solves as above with default integration properties replaced by values in `options`, an argument created with `ddeset`. See `ddeset` and "Types of DDEs" for more information.

Commonly used options are scalar relative error tolerance `'RelTol'` (`1e-3` by default) and vector of absolute error tolerances `'AbsTol'` (all components are `1e-6` by default).

Use the `'Jumps'` option to solve problems with discontinuities in the history or solution. Set this option to a vector that contains the locations of discontinuities in the solution prior to `t0` (the history) or in coefficients of the equations at known values of t after `t0`.

Use the `'Events'` option to specify a function that `dde23` calls to find where functions $g\left(t, y(t), y(t-\tau_1), \ldots, y(t-\tau_k)\right)$ vanish. This function must be of the form

```
[value,isterminal,direction] = events(t,y,Z)
```

and contain an event function for each event to be tested. For the `k`th event function in `events`:

- `value(k)` is the value of the `k`th event function.
- `isterminal(k) = 1` if you want the integration to terminate at a zero of this event function and `0` otherwise.
- `direction(k) = 0` if you want `dde23` to compute all zeros of this event function, `+1` if only zeros where the event function increases, and `-1` if only zeros where the event function decreases.

If you specify the `'Events'` option and events are detected, the output structure `sol` also includes fields:

`sol.xe`	Row vector of locations of all events, i.e., times when an event function vanished
`sol.ye`	Matrix whose columns are the solution values corresponding to times in `sol.xe`
`sol.ie`	Vector containing indices that specify which event occurred at the corresponding time in `sol.xe`

Examples

This example solves a DDE on the interval [0, 5] with lags 1 and 0.2. The function `ddex1de` computes the delay differential equations, and `ddex1hist` computes the history for `t <= 0`.

Note The file, ddex1.m, contains the complete code for this example. To see the code in an editor, type `edit ddex1` at the command line. To run it, type `ddex1` at the command line.

```
sol = dde23(@ddex1de,[1, 0.2],@ddex1hist,[0, 5]);
```

This code evaluates the solution at 100 equally spaced points in the interval `[0,5]`, then plots the result.

```
tint = linspace(0,5);
yint = deval(sol,tint);
plot(tint,yint);
```

`ddex1` shows how you can code this problem using local functions. For more examples see `ddex2`.

Algorithms

`dde23` tracks discontinuities and integrates with the explicit Runge-Kutta (2,3) pair and interpolant of `ode23`. It uses iteration to take steps longer than the lags.

References

[1] Shampine, L.F. and S. Thompson, "Solving DDEs in MATLAB," *Applied Numerical Mathematics*, Vol. 37, 2001, pp. 441-458.

[2] Kierzenka, J., L.F. Shampine, and S. Thompson, "Solving Delay Differential Equations with dde23"

See Also

See Also

`ddeget` | `ddensd` | `ddesd` | `ddeset` | `deval`

Topics

"Create Function Handle"

Introduced before R2006a

ddeget

Extract properties from delay differential equations options structure

Syntax

```
val = ddeget(options,'name')
val = ddeget(options,'name',default)
```

Description

`val = ddeget(options,'name')` extracts the value of the named property from the structure `options`, returning an empty matrix if the property value is not specified in `options`. It is sufficient to type only the leading characters that uniquely identify the property. Case is ignored for property names. `[]` is a valid `options` argument.

`val = ddeget(options,'name',default)` extracts the named property as above, but returns `val = default` if the named property is not specified in `options`. For example,

```
val = ddeget(opts,'RelTol',1e-4);
```

returns `val = 1e-4` if the `RelTol` is not specified in `opts`.

See Also

`dde23` | `ddesd` | `ddensd` | `ddeset`

Introduced before R2006a

ddensd

Solve delay differential equations (DDEs) of neutral type

Syntax

```
sol = ddensd(ddefun,dely,delyp,history,tspan)
sol = ddensd(ddefun,dely,delyp,history,tspan,options)
```

Description

`sol = ddensd(ddefun,dely,delyp,history,tspan)` integrates a system of delay differential equations of neutral type, that has the form

$$y'(t) = f(t, y(t), y(dy_1),..., y(dy_p), y'(dyp_1),..., y'(dyp_q))$$

where

- t is the independent variable representing time.
- dy_i is any of p solution delays.
- dyp_j is any of q derivative delays.

`sol = ddensd(ddefun,dely,delyp,history,tspan,options)` replaces default integration parameters with those specified in `options`, a structure created with the `ddeset` function.

Examples

Neutral DDE with Two Delays

Solve the following neutral DDE, presented by Paul, for $0 \le t \le \pi$.

$$y'(t) = 1 + y(t) - 2y(t/2)^2 - y'(t - \pi)$$

The solution history is $y(t) = \cos(t)$ for $t \leq 0$.

Create a new program file in the editor. This file will contain a main function and four local functions.

Define the first-order DDE as a local function named `ddefun`.

```
function yp = ddefun(t,y,ydel,ypdel)
    yp = 1 + y - 2*ydel^2 - ypdel;
end
```

Define the solution delay as a local function named `dely`.

```
function dy = dely(t,y)
    dy = t/2;
end
```

Define the derivative delay as a local function named `delyp`.

```
function dyp = delyp(t,y)
    dyp = t-pi;
end
```

Define the solution history as a local function named `history`.

```
function y = history(t)
    y = cos(t);
end
```

Define the interval of integration and solve the DDE using `ddensd`. Add this code to the main function.

```
tspan = [0 pi];
sol = ddensd(@ddefun,@dely,@delyp,@history,tspan);
```

Evaluate the solution at 100 equally spaced points between 0 and π. Add this code to the main function.

```
tn = linspace(0,pi);
yn = deval(sol,tn);
```

Plot the results. Add this code to the main function.

```
plot(tn,yn);
xlim([0 pi]);
ylim([-1.2 1.2]);
xlabel('time t');
ylabel('solution y');
```

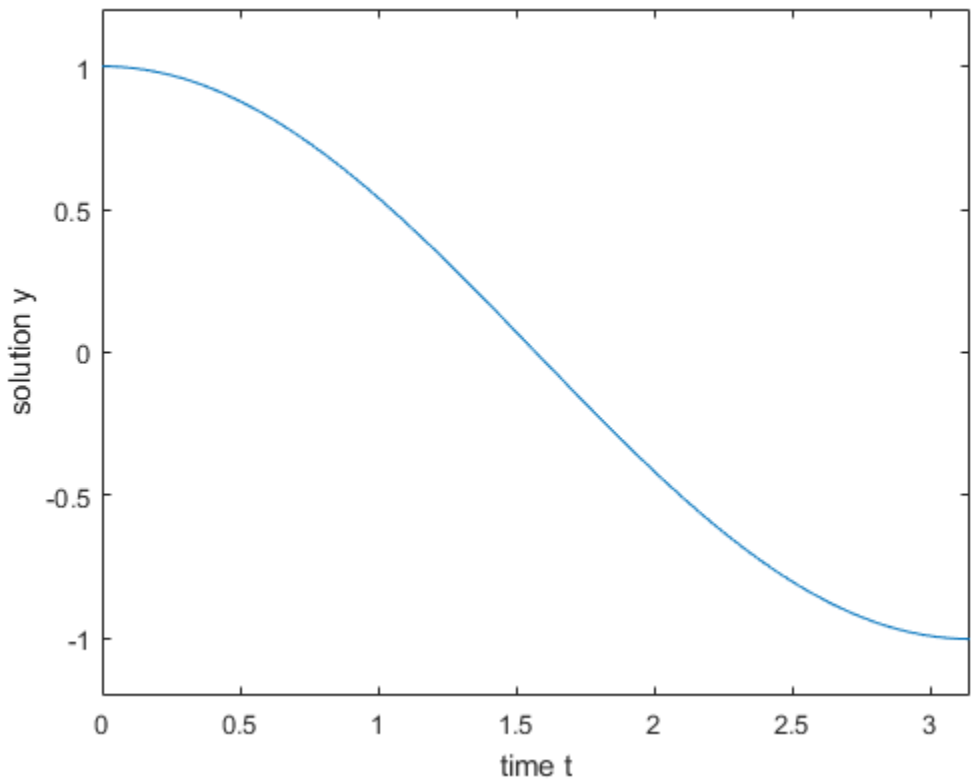

Run your entire program to calculate the solution and display the plot. The file `ddex4.m` contains the complete code for this example. To see the code in an editor, type `edit ddex4` at the command line.

Input Arguments

`ddefun` — Derivative function

function handle

Derivative function, specified as a function handle whose syntax is `yp = ddefun(t,y,ydel,ypdel)`. The arguments for `ddefun` are described in the table below.

ddefun Argument	Description
`t`	A scalar value representing the current value of time, t.
`y`	A vector that represents $y(t)$ in Equation 1-1. The size of this vector is `n`-by-`1`, where `n` is the number of equations in the system you want to solve.
`ydel`	A matrix whose columns, `ydel(:,i)`, represent $y(dy_i)$. The size of this matrix is `n`-by-`p`, where `n` is the number of equations in the system you want to solve, and `p` is the number of $y(dy)$ terms in Equation 1-1.
`ypdel`	A matrix whose columns, `ypdel(:,j)` represent $y'(dyp_j)$. The size of this matrix is `n`-by-`q`, where `n` is the number of equations in the system you want to solve, and `q` is the number of $y'(dyp)$ terms in Equation 1-1.
`yp`	The result returned by `ddefun`. It is an `n`-by-`1` vector whose elements represent the right side of Equation 1-1.

`dely` — Solution delays

function handle | vector

Solution delays, specified as a function handle, which returns $dy_1,\ldots, dy_p$ in Equation 1-1. Alternatively, you can pass constant delays in the form of a vector.

If you specify `dely` as a function handle, the syntax must be `dy = dely(t,y)`. The arguments for this function are described in the table below.

dely Argument	Description
`t`	A scalar value representing the current value of time, t.
`y`	A vector that represents $y(t)$ in Equation 1-1. The size of this vector is `n`-by-`1`, where `n` is the number of equations in the system you want to solve.
`dy`	A vector returned by the `dely` function whose values are the solution delays, dy_i , in Equation 1-1. The size of this vector is `p`-by-`1`, where `p` is the number of solution delays in the equation. Each element must be less than or equal to t.

If you want to specify constant solution delays having the form $dy_i = t - \tau_i$, then `dely` must be a vector, where `dely(i)` = τ_i. Each value in this vector must be greater than or equal to zero.

If dy is not present in the problem, set `dely` to `[]`.

Data Types: `function_handle` | `single` | `double`

`delyp` — Derivative delays

function handle | vector

Derivative delays, specified as a function handle, which returns $dyp_1,..., dyp_q$ in Equation 1-1. Alternatively, you can pass constant delays in the form of a vector.

If `delyp` is a function handle, its syntax must be `dyp = delyp(t,y)`. The arguments for this function are described in the table below.

delyp Argument	Description
`t`	A scalar value representing the current value of time, t.
`y`	A vector that represents $y(t)$ in Equation 1-1. The size of this vector is `n`-by-`1`, where `n` is the number of equations in the system you want to solve.
`dyp`	A vector returned by the `delyp` function whose values are the derivative delays, dyp_j, in Equation 1-1. The size of this vector must be `q`-by-`1`, where `q` is the number of solution delays, dyp_j, in the equation. Each element of `dyp` must be less than t. There is one exception to this restriction: if you are solving

delyp Argument	Description
	an initial value DDE, the value of `dyp` can equal t at $t = t_0$. For more information, see "Initial Value Neutral Delay Differential Equations" on page 1-2375.

If you want specify constant derivative delays having the form $dyp_j = t - \tau_j$, then `delyp` must be a vector, where `delyp(j)` = τ_j. Each value in this vector must be greater than zero. An exception to this restriction occurs when you solve initial value problems for DDEs of neutral type. In such cases, a value in `delyp` can equal zero at $t = t_0$. See "Initial Value Neutral Delay Differential Equations" on page 1-2375 for more information.

If *dyp* is not present in the problem, set `delyp` to `[]`.

Data Types: `function_handle` | `single` | `double`

`history` — Solution history

function handle | column vector | structure (`sol`, from previous integration) | 1-by-2 cell array

Solution history, specified as a function handle, column vector, `sol` structure (from a previous integration), or a cell array. This is the solution at $t \le t_0$.

- If the history varies with time, specify the solution history as a function handle whose syntax is `y = history(t)`. This function returns an `n`-by-`1` vector that approximates the solution, $y(t)$, for $t <= t_0$. The length of this vector, `n`, is the number of equations in the system you want to solve.
- If $y(t)$ is constant, you can specify `history` as an `n`-by-`1` vector of the constant values.
- If you are calling `ddensd` to continue a previous integration to t_0, you can specify history as the output, `sol`, from the previous integration.
- If you are solving an initial value DDE, specify history as a cell array, `{y0, yp0}`. The first element, `y0`, is a column vector of initial values, $y(t_0)$. The second element, yp_0, is a column vector whose elements are the initial derivatives, $y'(t_0)$. These vectors must be consistent, meaning that they satisfy Equation 1-1 at t_0. See "Initial Value Neutral Delay Differential Equations" on page 1-2375 for more information.

Data Types: `function_handle` | `single` | `double` | `struct` | `cell`

`tspan` — Interval of integration

1-by-2 vector

Interval of integration, specified as the vector `[t0 tf]`. The first element, `t0`, is the initial value of t. The second element, `tf`, is the final value of t. The value of `t0` must be less than `tf`.

Data Types: `single` | `double`

`options` — Optional integration parameters
structure returned by `ddeset`

Optional integration parameters, specified as a structure created and returned by the `ddeset` function. Some commonly used properties are: `'RelTol'`, `'AbsTol'`, and `'Events'`. See the `ddeset` reference page for more information about specifying `options`.

Output Arguments

`sol` — Solution
structure

Solution, returned as a structure containing the following fields.

`sol.x`	Mesh selected by `ddensd`.
`sol.y`	An approximation to $y(t)$ at the mesh points.
`sol.yp`	An approximation to $y'(t)$ at the mesh points.
`sol.solver`	A character vector identifying the solver, `'ddensd'`.

You can pass `sol` to the `deval` function to evaluate the solution at specific points. For example, `y = deval(sol, 0.5*(sol.x(1) + sol.x(end)))` evaluates the solution at the midpoint of the interval of integration.

Definitions

Initial Value Neutral Delay Differential Equations

An initial value DDE has $dy_i \geq t_0$ and $dyp_j \geq t_0$, for all i and j. At $t = t_0$, all delayed terms reduce to $y(dy_i) = y(t_0)$ and $y'(dyp_j) = y'(t_0)$:

$y'(t_0) = f(t_0, y(t_0), y(t_0),..., y(t_0), y'(t_0),..., y'(t_0))$

For $t > t_0$, all derivative delays must satisfy $dyp < t$.

When you solve initial value neutral DDEs, you must supply $y'(t_0)$ to `ddensd`. To do this, specify `history` as a cell array `{Y0,YP0}`. Here, `Y0` is the column vector of initial values, $y(t_0)$, and `YP0` is a column vector of initial derivatives, $y'(t_0)$. These vectors must be consistent, meaning that they satisfy Equation 1-2 at t_0.

Algorithms

For information about the algorithm used in this solver, see Shampine [2].

References

[1] Paul, C.A.H. "A Test Set of Functional Differential Equations." *Numerical Analysis Reports*. No. 243. Manchester, UK: Math Department, University of Manchester, 1994.

[2] Shampine, L.F. "Dissipative Approximations to Neutral DDEs." *Applied Mathematics & Computation*. Vol. 203, Number 2, 2008, pp. 641–648.

See Also

See Also

`dde23` | `ddesd` | `ddeset` | `deval`

Topics

"Create Function Handle"

Introduced in R2012b

ddesd

Solve delay differential equations (DDEs) with general delays

Syntax

```
sol = ddesd(ddefun,delays,history,tspan)
sol = ddesd(ddefun,delays,history,tspan,options)
```

Arguments

`ddefun`	Function handle that evaluates the right side of the differential equations $y'(t) = f(t,y(t),y(d(1),\ldots,y(d(k)))$. The function must have the form `dydt = ddefun(t,y,Z)` where `t` corresponds to the current t, `y` is a column vector that approximates $y(t)$, and `Z(:,j)` approximates $y(d(j))$ for delay $d(j)$ given as component j of `delays(t,y)`. The output is a column vector corresponding to $f(t,y(t),y(d(1),\ldots,y(d(k)))$.
`delays`	Function handle that returns a column vector of delays $d(j)$. The delays can depend on both t and $y(t)$. `ddesd` imposes the requirement that $d(j) \le t$ by using `min`$(d(j),t)$. If all the delay functions have the form $d(j) = t - \tau_j$, you can set the argument `delays` to a constant vector `delays`(j) $= \tau_j$. With delay functions of this form, `ddesd` is used exactly like `dde23`.
`history`	Specify `history` in one of three ways: • A function of t such that `y = history(t)` returns the solution $y(t)$ for $t \le t_0$ as a column vector • A constant column vector, if $y(t)$ is constant • The solution `sol` from a previous integration, if this call continues that integration

`tspan`	Interval of integration from `t0=tspan(1)` to `tf=tspan(end)` with `t0 < tf`.
`options`	Optional integration argument. A structure you create using the `ddeset` function. See `ddeset` for details.

Description

`sol = ddesd(ddefun,delays,history,tspan)` integrates the system of DDEs

$$y'(t) = f\left(t, y(t), y(d(1)), \ldots, y(d(k))\right)$$

on the interval $[t_0, t_f]$, where delays $d(j)$ can depend on both t and $y(t)$, and $t_0 < t_f$. Inputs `ddefun` and `delays` are function handles. See "Create Function Handle" for more information.

"Parameterizing Functions" explains how to provide additional parameters to the functions `ddefun`, `delays`, and `history`, if necessary.

`ddesd` returns the solution as a structure `sol`. Use the auxiliary function `deval` and the output `sol` to evaluate the solution at specific points `tint` in the interval `tspan = [t0,tf]`.

```
yint = deval(sol,tint)
```

The structure `sol` returned by `ddesd` has the following fields.

`sol.x`	Mesh selected by `ddesd`
`sol.y`	Approximation to $y(x)$ at the mesh points in `sol.x`.
`sol.yp`	Approximation to $y'(x)$ at the mesh points in `sol.x`
`sol.solver`	Solver name, `'ddesd'`

`sol = ddesd(ddefun,delays,history,tspan,options)` solves as above with default integration properties replaced by values in `options`, an argument created with `ddeset`. See `ddeset` and "Types of DDEs" for more information.

Commonly used options are scalar relative error tolerance `'RelTol'` (`1e-3` by default) and vector of absolute error tolerances `'AbsTol'` (all components are `1e-6` by default).

Use the `'Events'` option to specify a function that `ddesd` calls to find where functions $g(t,y(t),y(d(1)),\ldots,y(d(k)))$ vanish. This function must be of the form

```
[value,isterminal,direction] = events(t,y,Z)
```

and contain an event function for each event to be tested. For the `k`th event function in `events`:

- `value(k)` is the value of the `k`th event function.
- `isterminal(k) = 1` if you want the integration to terminate at a zero of this event function and `0` otherwise.
- `direction(k) = 0` if you want `ddesd` to compute all zeros of this event function, `+1` if only zeros where the event function increases, and `-1` if only zeros where the event function decreases.

If you specify the `'Events'` option and events are detected, the output structure `sol` also includes fields:

`sol.xe`	Row vector of locations of all events, i.e., times when an event function vanished
`sol.ye`	Matrix whose columns are the solution values corresponding to times in `sol.xe`
`sol.ie`	Vector containing indices that specify which event occurred at the corresponding time in `sol.xe`

Examples

The equation

```
sol = ddesd(@ddex1de,@ddex1delays,@ddex1hist,[0,5]);
```

solves a DDE on the interval `[0,5]` with delays specified by the function `ddex1delays` and differential equations computed by `ddex1de`. The history is evaluated for $t \le 0$ by the function `ddex1hist`. The solution is evaluated at 100 equally spaced points in `[0,5]`:

```
tint = linspace(0,5);
yint = deval(sol,tint);
```

and plotted with

```
plot(tint,yint);
```

This problem involves constant delays. The `delay` function has the form

```
function d = ddex1delays(t,y)
%DDEX1DELAYS  Delays for using with DDEX1DE.
d = [ t - 1
      t - 0.2];
```

The problem can also be solved with the syntax corresponding to constant delays

```
delays = [1, 0.2];
sol = ddesd(@ddex1de,delays,@ddex1hist,[0, 5]);
```

or using `dde23`:

```
sol = dde23(@ddex1de,delays,@ddex1hist,[0, 5]);
```

For more examples of solving delay differential equations see ddex2 and ddex3.

References

[1] Shampine, L.F., "Solving ODEs and DDEs with Residual Control," *Applied Numerical Mathematics*, Vol. 52, 2005, pp. 113-127.

See Also

See Also

`dde23` | `ddeget` | `ddensd` | `ddeset` | `deval`

Topics

"Create Function Handle"

ddeset

Create or alter delay differential equations options structure

Syntax

```
options = ddeset('name1',value1,'name2',value2,...)
options = ddeset(oldopts,'name1',value1,...)
options = ddeset(oldopts,newopts)
ddeset
```

Description

`options = ddeset('name1',value1,'name2',value2,...)` creates an integrator options structure `options` in which the named properties have the specified values. Any unspecified properties have default values. It is sufficient to type only the leading characters that uniquely identify the property. `ddeset` ignores case for property names.

`options = ddeset(oldopts,'name1',value1,...)` alters an existing options structure `oldopts`. This overwrites any values in `oldopts` that are specified using name/value pairs and returns the modified structure as the output argument.

`options = ddeset(oldopts,newopts)` combines an existing options structure `oldopts` with a new options structure `newopts`. Any values set in `newopts` overwrite the corresponding values in `oldopts`.

`ddeset` with no input arguments displays all property names and their possible values, indicating defaults with braces `{}`.

You can use the function `ddeget` to query the `options` structure for the value of a specific property.

DDE Properties

The following sections describe the properties that you can set using `ddeset`. There are several categories of properties:

- Error control

- Solver output
- Step size
- Event location
- Discontinuities

Error Control Properties

At each step, the DDE solvers estimate an error `e`. The `dde23` function estimates the local truncation error, and the other solvers estimate the residual. In either case, this error must be less than or equal to the acceptable error, which is a function of the specified relative tolerance, `RelTol`, and the specified absolute tolerance, `AbsTol`.

```
|e(i)|*max(RelTol*abs(y(i)),AbsTol(i))
```

For routine problems, the solvers deliver accuracy roughly equivalent to the accuracy you request. They deliver less accuracy for problems integrated over "long" intervals and problems that are moderately unstable. Difficult problems may require tighter tolerances than the default values. For relative accuracy, adjust `RelTol`. For the absolute error tolerance, the scaling of the solution components is important: if `|y|` is somewhat smaller than `AbsTol`, the solver is not constrained to obtain any correct digits in `y`. You might have to solve a problem more than once to discover the scale of solution components.

Roughly speaking, this means that you want `RelTol` correct digits in all solution components except those smaller than thresholds `AbsTol(i)`. Even if you are not interested in a component `y(i)` when it is small, you may have to specify `AbsTol(i)` small enough to get some correct digits in `y(i)` so that you can accurately compute more interesting components.

The following table describes the error control properties.

DDE Error Control Properties

Property	Value	Description
`RelTol`	Positive scalar {`1e-3`}	A relative error tolerance that applies to all components of the solution vector `y`. It is a measure of the error relative to the size of each solution component. Roughly, it controls the number of correct digits in all solution components except those smaller than thresholds `AbsTol(i)`. The default, `1e-3`, corresponds to 0.1% accuracy.

Property	Value	Description
		The estimated error in each integration step satisfies `|e(i)| max(RelTol*abs(y(i)),AbsTol(i))`.
`AbsTol`	Positive scalar or vector {`1e-6`}	Absolute error tolerances that apply to the individual components of the solution vector. `AbsTol(i)` is a threshold below which the value of the `i`th solution component is unimportant. The absolute error tolerances determine the accuracy when the solution approaches zero. Even if you are not interested in a component `y(i)` when it is small, you may have to specify `AbsTol(i)` small enough to get some correct digits in `y(i)` so that you can accurately compute more interesting components. If `AbsTol` is a vector, the length of `AbsTol` must be the same as the length of the solution vector `y`. If `AbsTol` is a scalar, the value applies to all components of `y`.
`NormControl`	`on` | {`off`}	Control error relative to norm of solution. Set this property `on` to request that the solvers control the error in each integration step with `norm(e)<= max(RelTol*norm(y),AbsTol)`. By default, the solvers use a more stringent component-wise error control.

Solver Output Properties

You can use the solver output properties to control the output that the solvers generate.

DDE Solver Output Properties

Property	Value	Description

`OutputFcn`	Function handle {`@odeplot`}	The output function is a function that the solver calls after every successful integration step. To specify an output function, set `'OutputFcn'` to a function handle. For example,
		
		`options = ddeset('OutputFcn',...`
		`@myfun)`
		
		sets `'OutputFcn'` to @myfun, a handle to the function `myfun`. See “Create Function Handle” for more information.

Property	Value	Description
		The output function must be of the form `status = myfun(t,y,flag)` "Parameterizing Functions" explains how to provide additional parameters to `myfun`, if necessary. The solver calls the specified output function with the following flags. Note that the syntax of the call differs with the flag. The function must respond appropriately: • `init` — The solver calls `myfun(tspan,y0,'init')` before beginning the integration to allow the output function to initialize. `tspan` is the input argument to the solvers. `y0` is the initial value of the solution, either from `history(t0)` or specified in the `initialY` option. • {none} — The solver calls `status = myfun(t,y)` after each integration step on which output is requested. `t` contains points where output was generated during the step, and `y` is the numerical solution at the points in `t`. If `t` is a vector, the `i`th column of `y` corresponds to the `i`th element of `t`. `myfun` must return a `status` output value of `0` or `1`. If `status = 1`, the solver halts integration. You can use this mechanism, for instance, to implement a **Stop** button. • done — The solver calls `myfun([],[],'done')` when integration is complete to allow the output function to perform any cleanup chores. You can use these general purpose output functions or you can edit them to create your own. Type `help functionname` at the command line for more information. • `odeplot` – time series plotting (default when you call the solver with no output argument and you have not specified an output function) • `odephas2` – two-dimensional phase plane plotting

Property	Value	Description
		• `odephas3` – three-dimensional phase plane plotting • `odeprint` – print solution as the solver computes it

`OutputSel`	Vector of indices	Vector of indices specifying which components of the solution vector the solvers pass to the output function. For example, if you want to use the `odeplot` output function, but you want to plot only the first and third components of the solution, you can do this using
		`options = ddeset...`
		`('OutputFcn',@odeplot,...`
		`'OutputSel',[1 3]);`
		By default, the solver passes all components of the solution to the output function.

`Stats`	`on` | {`off`}	Specifies whether the solver should display statistics about its computations. By default, `Stats` is `off`. If it is `on`, after solving the problem the solver displays: • The number of successful steps • The number of failed attempts • The number of times the DDE function was called

Step Size Properties

The step size properties let you specify the size of the first step the solver tries, potentially helping it to better recognize the scale of the problem. In addition, you can specify bounds on the sizes of subsequent time steps.

The following table describes the step size properties.

DDE Step Size Properties

Property	Value	Description
`InitialStep`	Positive scalar	Suggested initial step size. `InitialStep` sets an upper bound on the magnitude of the first step size the solver tries. If you do not set `InitialStep`, the solver bases the initial step size on the slope of the solution at the initial time `tspan(1)`. The initial step size is limited by the

Property	Value	Description
		shortest delay. If the slope of all solution components is zero, the procedure might try a step size that is much too large. If you know this is happening or you want to be sure that the solver resolves important behavior at the start of the integration, help the code start by providing a suitable `InitialStep`.
`MaxStep`	Positive scalar {`0.1* abs(t0-tf)`}	Upper bound on solver step size. If the differential equation has periodic coefficients or solutions, it may be a good idea to set `MaxStep` to some fraction (such as 1/4) of the period. This guarantees that the solver does not enlarge the time step too much and step over a period of interest. Do *not* reduce `MaxStep`: • When the solution does not appear to be accurate enough. Instead, reduce the relative error tolerance `RelTol`, and use the solution you just computed to determine appropriate values for the absolute error tolerance vector `AbsTol`. (See "Error Control Properties" on page 1-2382 for a description of the error tolerance properties.) • To make sure that the solver doesn't step over some behavior that occurs only once during the simulation interval. If you know the time at which the change occurs, break the simulation interval into two pieces and call the solver twice. If you do not know the time at which the change occurs, try reducing the error tolerances `RelTol` and `AbsTol`. Use `MaxStep` as a last resort.

Event Location Property

In some DDE problems, the times of specific events are important. While solving a problem, the solvers can detect such events by locating transitions to, from, or through zeros of user-defined functions.

The following table describes the `Events` property.

DDE Events Property

Property	Value	Description

`Events`	Function handle	A function handle that includes one or more event functions. For `dde23` and `ddesd`, this function has the following syntax:
		`[value,isterminal,direction] = events(t,y,YDEL)`
		For `ddensd`, the syntax is:
		`[value,isterminal,direction] = events(t,y,YDEL,YPDEL)`
		The output arguments, `value`, `isterminal`, and `direction`, are vectors for which the `i`th element corresponds to the `i`th event function:
		• `value(i)` is the value of the `i`th event function.
		• `isterminal(i)` = `1` if you want the integration to terminate at a zero of this event function, and `0` otherwise.
		• `direction(i) = 0` if you want the solver to locate all zeros (the default), `+1` if only zeros where the event function is increasing, and `-1` if only zeros where the event function is decreasing.
		If you specify an events function and events are detected, the solver returns three additional fields in the solution structure `sol`:
		• `sol.xe` is a row vector of times at which events occur.
		• `sol.ye` is a matrix whose columns are the solution values corresponding to times in `sol.xe`.
		• `sol.ie` is a vector containing indices that specify which event occurred at the corresponding time in `sol.xe`.
		For examples that use an event function while solving ordinary differential equation problems, see “ODE Event Location”.

Discontinuity Properties

The solver functions can solve problems with discontinuities in the history or in the coefficients of the equations. The following properties enable you to provide these solvers

with a different initial value, and, for `dde23`, locations of known discontinuities. For more information, see "Discontinuities in DDEs".

The following table describes the discontinuity properties.

DDE Discontinuity Properties

Property	Value	Description
`Jumps`	Vector	Location of discontinuities. Points *t* where the history or solution may have a jump discontinuity in a low-order derivative. This applies only to the `dde23` solver.
`InitialY`	Vector	Initial value of solution. By default the initial value of the solution is the value returned by `history` at the initial point. Supply a different initial value as the value of the `InitialY` property.

Examples

To create an options structure that changes the relative error tolerance of the solver from the default value of `1e-3` to `1e-4`, enter

```
options = ddeset('RelTol',1e-4);
```

To recover the value of `'RelTol'` from `options`, enter

```
ddeget(options,'RelTol')

ans =

  1.0000e-004
```

See Also

See Also

`dde23` | `ddeget` | `ddensd` | `ddesd`

Topics

"Create Function Handle"

Introduced before R2006a

deal

Distribute inputs to outputs

Compatibility

Beginning with MATLAB Version 7.0 software, you can access the contents of cell arrays and structure fields without using the `deal` function. See Example 3, below.

Syntax

```
[Y1, Y2, Y3, ...] = deal(X)
[Y1, Y2, Y3, ...] = deal(X1, X2, X3, ...)
[S.field] = deal(X)
[X{:}] = deal(A.field)
[Y1, Y2, Y3, ...] = deal(X{:})
[Y1, Y2, Y3, ...] = deal(S.field)
```

Description

`[Y1, Y2, Y3, ...] = deal(X)` copies the single input to all the requested outputs. It is the same as `Y1 = X`, `Y2 = X`, `Y3 = X`, `...`

`[Y1, Y2, Y3, ...] = deal(X1, X2, X3, ...)` is the same as `Y1 = X1`; `Y2 = X2`; `Y3 = X3`; `...`

Examples

Example 1 — Assign Data From a Cell Array

Use `deal` to copy the contents of a 4-element cell array into four separate output variables.

```
C = {rand(3) ones(3,1) eye(3) zeros(3,1)};
[a,b,c,d] = deal(C{:})
```

```
a =
    0.9501    0.4860    0.4565
    0.2311    0.8913    0.0185
    0.6068    0.7621    0.8214

b =
    1
    1
    1

c =
    1    0    0
    0    1    0
    0    0    1

d =
    0
    0
    0
```

Example 2 — Assign Data From Structure Fields

Use `deal` to obtain the contents of all the name fields in a structure array:

```
A.name = 'Pat'; A.number = 176554;
A(2).name = 'Tony'; A(2).number = 901325;
[name1,name2] = deal(A(:).name)

name1 =
   Pat

name2 =
   Tony
```

Example 3 — Doing the Same Without deal

Beginning with MATLAB Version 7.0 software, you can, in most cases, access the contents of cell arrays and structure fields without using the `deal` function. The two commands shown below perform the same operation as those used in the previous two examples, except that these commands do not require `deal`.

```
[a,b,c,d] = C{:}
```

```
[name1,name2] = A(:).name
```

Tips

`deal` is most useful when used with cell arrays and structures via comma-separated list expansion. Here are some useful constructions:

`[S.field] = deal(X)` sets all the fields with the name `field` in the structure array `S` to the value `X`. If `S` doesn't exist, use `[S(1:m).field] = deal(X)`.

`[X{:}] = deal(A.field)` copies the values of the field with name `field` to the cell array `X`. If `X` doesn't exist, use `[X{1:m}] = deal(A.field)`.

`[Y1, Y2, Y3, ...] = deal(X{:})` copies the contents of the cell array `X` to the separate variables `Y1, Y2, Y3, ...`

`[Y1, Y2, Y3, ...] = deal(S.field)` copies the contents of the fields with the name `field` to separate variables `Y1, Y2, Y3, ...`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`struct` | `cell` | `iscell` | `celldisp` | `isstruct` | `fieldnames` | `isfield` | `orderfields` | `rmfield` | `cell2struct` | `struct2cell`

Introduced before R2006a

deblank

Remove trailing whitespace from end of string or character array

Syntax

```
newTxt = deblank(txt)
```

Description

`newTxt = deblank(txt)` removes trailing whitespace and null characters from `txt` and returns the result as `newTxt`. However, `deblank` does not remove significant whitespace characters. For example, `deblank` removes trailing space and tab characters, but does not remove the nonbreaking space character, `char(160)`.

Examples

Remove Trailing Blanks from Character Vector

Create a character vector that contains space, tab, and null characters.

```
chr = sprintf(' \t MathWorks \t');
chr = [chr char(0)];
```

Display `chr` between `|` characters.

```
['|' chr '|']
```

```
ans =
'|   MathWorks   |'
```

Remove the trailing blanks and display `newChr` between `|` characters.

```
newChr = deblank(chr);
['|' newChr '|']
```

```
ans =
'|   MathWorks|'
```

Convert Character Array and Remove Trailing Spaces

Create a character array that contains multiple pieces of text. When a character array contains multiple rows, it is often necessary to pad the array with space characters.

```
chr = ['Mercury';
       'Apollo ';
       'ISS    ']
```

```
chr = 3×7 char array
    'Mercury'
    'Apollo '
    'ISS    '
```

Convert `chr` to a string array. The elements of `str` include the trailing space characters that padded `chr`.

```
str = string(chr)
```

```
str = 3×1 string array
    "Mercury"
    "Apollo "
    "ISS    "
```

To remove the trailing spaces, use the `deblank` function.

```
newStr = deblank(str)
```

```
newStr = 3×1 string array
    "Mercury"
    "Apollo"
    "ISS"
```

Remove Trailing Blanks from Cell Array

Remove trailing blanks from all the character vectors in a cell array and display them.

```
A = {'MATLAB    ','SIMULINK    ';
     'Toolboxes    ','MathWorks    '}
```

```
A = 2×2 cell array
```

```
    'MATLAB    '        'SIMULINK    '
    'Toolboxes    '    'MathWorks    '
```

```
B = deblank(A)
```

```
B = 2×2 cell array
    'MATLAB'       'SIMULINK'
    'Toolboxes'    'MathWorks'
```

Keep Trailing Nonbreaking Space Character

Create a character vector that includes the nonbreaking space character, `char(160)`, as a trailing blank character.

```
chr = '     MathWorks';
chr = [chr char(160) '     '];
```

Display `chr` between `|` symbols to show the leading and trailing whitespace.

```
['|' chr '|']
```

```
ans =
'|     MathWorks      |'
```

Remove the trailing whitespace characters.

```
newChr = deblank(chr);
```

Display `newChr` between `|` symbols. `deblank` removes the trailing space characters, but leaves the nonbreaking space at the end of `newChr`.

```
['|' newChr '|']
```

```
ans =
'|     MathWorks |'
```

Input Arguments

`txt` — Input text

string array | character array | cell array of character arrays

Input text, specified as a string array, a character array, or as a cell array of character arrays.

Data Types: `string` | `char` | `cell`

Algorithms

`deblank` does not remove significant whitespace characters.

This table shows the most common characters that are significant whitespace characters and their descriptions. For more information, see Whitespace character.

Significant Whitespace Character	Description
`char(133)`	Next line
`char(160)`	Nonbreaking space
`char(8199)`	Figure space
`char(8239)`	Narrow no-break space

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input text must be specified as a character array. Cell arrays are not supported.

- Input values must be in the range 0-127.

See Also

See Also

`cellstr` | `isspace` | `strjust` | `strtrim`

Introduced before R2006a

dec2base

Convert decimal number to character vector representing base N number

Syntax

```
str = dec2base(d, base)
str = dec2base(d, base, n)
```

Description

`str = dec2base(d, base)` converts the nonnegative integer `d` to the specified `base`. `d` must be a nonnegative integer smaller than the value returned by `flintmax`, and `base` must be an integer between 2 and 36. The returned argument `str` is a character vector.

`str = dec2base(d, base, n)` produces a representation with at least `n` digits.

Examples

The expression `dec2base(23, 2)` converts 23_{10} to base 2, returning the character vector `'10111'`.

See Also

`base2dec` | `dec2hex` | `dec2bin` | `flintmax`

Introduced before R2006a

dec2bin

Convert decimal number to character vector representing binary number

Syntax

```
str = dec2bin(d)
str = dec2bin(d,n)
```

Description

`str = dec2bin(d)` returns the binary representation of `d` as a character vector. `d` must be a nonnegative integer. If `d` is greater than the value returned by `flintmax`, then `dec2bin` might not return an exact representation of `d`.

`str = dec2bin(d,n)` produces a binary representation with at least `n` bits.

The output of `dec2bin` is independent of the endian settings of the computer you are using.

Examples

Decimal 23 converts to binary 010111:

```
dec2bin(23)
ans =
    10111
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If input `d` is `double`, then it must be less than `2^52`.
- If input `d` is `single`, then it must be less than `2^23`.
- Unless you specify input `n` to be constant and `n` is large enough that the output has a fixed number of columns regardless of the input values, this function requires variable-sizing support. Without variable-sizing support, `n` must be at least `52` for `double`, `23` for `single`, `16` for `char`, `32` for `int32`, `16` for `int16`, and so on.

See Also

`bin2dec` | `dec2hex` | `dec2base` | `flintmax`

dec2hex

Convert decimal number to character vector representing hexadecimal number

Syntax

```
str = dec2hex(d)
str = dec2hex(d, n)
```

Description

`str = dec2hex(d)` returns the hexadecimal representation of `d` as a character vector. `d` must be a nonnegative integer. If `d` is an integer greater than the value returned by `flintmax`, then `dec2hex` might not return an exact representation. MATLAB converts noninteger inputs, such as those of class `double` or `char`, to their integer equivalents before converting to hexadecimal.

`str = dec2hex(d, n)` produces a hexadecimal representation with at least `n` digits.

Examples

To convert decimal 1023 to hexadecimal,

```
dec2hex(1023)
ans =
    3FF

dec2hex(1023, 6)
ans =
0003FF
```

Convert 2-by-5 array `A` to hexadecimal:

```
A = [3487,    125,  8997,  1433,  189; ...
      771,  84832,   118,  9366,  212];

 A(:)                    dec2hex(A)
ans =                    ans =
```

```
    3487                    00D9F
     771                    00303
     125                    0007D
   84832                    14B60
    8997                    02325
     118                    00076
    1433                    00599
    9366                    02496
     189                    000BD
     212                    000D4
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If input `d` is `double`, then `d` must be less than `2^52`.
- If input `d` is `single`, then `d` must be less than `2^23`.
- Unless you specify input `n` to be constant, and `n` is large enough that the output has a fixed number of columns regardless of the input values, this function requires variable-sizing support. Without variable-sizing support, `n` must be at least `13` for `double`, `6` for `single`, `4` for `char`, `8` for `int32`, `4` for `int16`, and so on.

See Also

`dec2bin` | `format` | `dec2base` | `hex2dec` | `hex2num` | `flintmax`

decic

Compute consistent initial conditions for `ode15i`

Syntax

```
[y0_new,yp0_new] = decic(odefun,t0,y0,fixed_y0,yp0,fixed_yp0)
[y0_new,yp0_new] = decic(odefun,t0,y0,fixed_y0,yp0,fixed_yp0,
options)
[y0_new,yp0_new,resnrm] = decic( ___ )
```

Description

`[y0_new,yp0_new] = decic(odefun,t0,y0,fixed_y0,yp0,fixed_yp0)` uses `y0` and `yp0` as guesses for the initial conditions of the fully implicit function `odefun`, holds the components specified by `fixed_y0` and `fixed_yp0` as fixed, then computes values for the nonfixed components. The result is a complete set of consistent initial conditions. The new values `yo_new` and `yp0_new` satisfy `odefun(t0,y0_new,yp0_new) = 0` and are suitable to be used as initial conditions with `ode15i`.

`[y0_new,yp0_new] = decic(odefun,t0,y0,fixed_y0,yp0,fixed_yp0, options)` also uses the options structure `options` to specify values for `AbsTol` and `RelTol`. Create the options structure using `odeset`.

`[y0_new,yp0_new,resnrm] = decic( ___ )` returns the norm of `odefun(t0,y0_new,yp0_new)` as `resnrm`. If the norm seems unduly large, then use `options` to decrease the relative error tolerance `RelTol`, which has a default value of `1e-3`.

Examples

Compute Consistent Initial Conditions for Implicit Equations

Consider the implicit system of equations

$$0 = 2y_1' - y_2$$
$$0 = y_1 + y_2$$

These equations are straightforward enough that it is simple to read off consistent initial conditions for the variables. For example, if you fix $y_1 = 1$, then $y_2 = -1$ according to the second equation and $y_1' = -1/2$ according to the first equation. Since these values of y_1, y_1', and y_2 satisfy the equations, they are consistent.

Confirm these values by using `decic` to compute consistent initial conditions for the equations, fixing the value $y_1 = 1$. Use guesses of `y0 = [1 0]` and `yp0 = [0 0]`, which do not satisfy the equations and are thus inconsistent.

```
odefun = @(t,y,yp) [2*yp(1)-y(2); y(1)+y(2)];
t0 = 0;
y0 = [1 0];
yp0 = [0 0];
[y0,yp0] = decic(odefun,t0,y0,[1 0],yp0,[])
```

```
y0 =

     1
    -1


yp0 =

   -0.5000
         0
```

Solve Weissinger Implicit ODE

Use `decic` to compute consistent initial conditions for the Weissinger implicit ODE. `decic` holds fixed the initial value for *y(t0)* and computes a consistent initial value for *y'(t0)*. The `weissinger` function evaluates the residual of the implicit ODE.

```
t0 = 1;
```

```
y0 = sqrt(3/2);
yp0 = 0;
[y0,yp0] = decic(@weissinger,t0,y0,1,yp0,0);
```

Use the result returned by `decic` with `ode15i` to solve the ODE. Plot the numerical solution, `y`, against the analytical solution, `ytrue`.

```
[t,y] = ode15i(@weissinger,[1 10],y0,yp0);
ytrue = sqrt(t.^2 + 0.5);
plot(t,y,t,ytrue,'o')
```

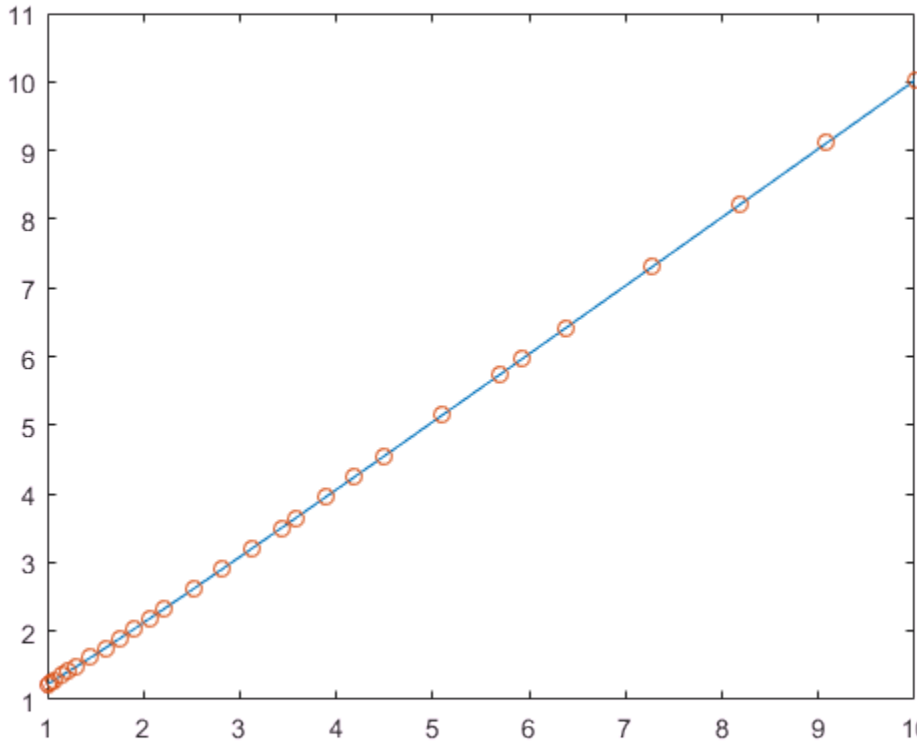

Input Arguments

odefun — Functions to solve

function handle

Functions to solve, specified as a function handle that defines the functions to be integrated. `odefun` represents the system of implicit differential equations that you want to solve using `ode15i`.

The function `f = odefun(t,y,yp)`, for a scalar `t` and column vectors `y` and `yp`, must return a column vector `f` of data type `single` or `double` that corresponds to $f(t,y,y')$. `odefun` must accept all three input arguments, `t`, `y`, and `yp` even if one of the arguments is not used in the function.

For example, to solve $y' - y = 0$, use this function.

```
function f = odefun(t,y,yp)
f = yp - y;
```

For a system of equations, the output of `odefun` is a vector. Each equation becomes an element in the solution vector. For example, to solve

$$y'_1 - y_2 = 0$$
$$y'_2 + 1 = 0,$$

use this function.

```
function dy = odefun(t,y,yp)
dy = zeros(2,1);
dy(1) = yp(1)-y(2);
dy(2) = yp(2)+1;
```

For information on how to provide additional parameters to the function `odefun`, see "Parameterizing Functions".

Example: `@myFcn`

Data Types: `function_handle`

t0 — Initial time

scalar

Initial time, specified as a scalar. `decic` uses the initial time to compute consistent initial conditions that satisfy `odefun(t0,y0_new,yp0_new) = 0`.

Data Types: `single` | `double`

`y0` — Initial guesses for `y`-components
vector

Initial guesses for `y`-components, specified as a vector. Each element in `y0` specifies an initial condition for one dependent variable y_n in the system of equations defined by `odefun`.

Data Types: `single` | `double`

`fixed_y0` — `y`-components to hold fixed
vector of 1s and 0s | `[]`

`y`-components to hold fixed, specified as a vector of 1s and 0s, or as `[]`.

- Set `fixed_y0(i) = 1` if no change is permitted in the guess for `y0(i)`.
- Set `fixed_y0 = []` if any entry can be changed.

You cannot fix more than `length(yp0)` components. Depending on the specific problem, it is not always possible to fix certain components of `y0` or `yp0`. It is a best practice not to fix more components than is necessary.

`yp0` — Initial guesses for `y'`-components
vector

Initial guesses for `y'`-components, specified as a vector. Each element in `yp0` specifies an initial condition for one differentiated dependent variable y'_n in the system of equations defined by `odefun`.

Data Types: `single` | `double`

`fixed_yp0` — `y'`-components to hold fixed
vector of 1s and 0s | `[]`

`y'`-components to hold fixed, specified as a vector of 1s and 0s, or as `[]`.

- Set `fixed_yp0(i) = 1` if no change is permitted in the guess for `yp0(i)`.
- Set `fixed_yp0 = []` if any entry can be changed.

You cannot fix more than `length(yp0)` components. Depending on the specific problem, it is not always possible to fix certain components of `y0` or `yp0`. It is a best practice not to fix more components than is necessary.

`options` — Option structure

structure array

Option structure, specified as a structure array. Use the `odeset` function to create or modify the option structure. The relevant options for use with the `decic` function are `RelTol` and `AbsTol`, which control the error thresholds used to compute the initial conditions.

Example: `options = odeset('RelTol',1e-5)`

Data Types: `struct`

Output Arguments

`y0_new` — Consistent initial conditions for `y0`

vector

Consistent initial conditions for `y0`, returned as a vector. If the value of `resnrm` is small, then `yo_new` and `yp0_new` satisfy `odefun(t0,y0_new,yp0_new) = 0` and are suitable to be used as initial conditions with `ode15i`.

`yp0_new` — Consistent initial conditions for `yp0`

vector

Consistent initial conditions for `yp0`, returned as a vector. If the value of `resnrm` is small, then `yo_new` and `yp0_new` satisfy `odefun(t0,y0_new,yp0_new) = 0` and are suitable to be used as initial conditions with `ode15i`.

`resnrm` — Norm of residual

vector

Norm of residual, returned as a vector. `resnrm` is the norm of `odefun(t0,y0_new,yp0_new)`.

- A small value of `resnrm` indicates that `decic` successfully computed consistent initial conditions that satisfy `odefun(t0,y0_new,yp0_new) = 0`.

- If the value of `resnrm` is large, try adjusting the error thresholds `RelTol` and `AbsTol` using the `options` input.

Tips

- The `ihb1dae` and `iburgersode` example files use `decic` to compute consistent initial conditions before solving with `ode15i`. Type `edit ihb1dae` or `edit iburgersode` to view the code.
- You can additionally use `decic` to compute consistent initial conditions for DAEs solved by `ode15s` or `ode23t`. To do this, follow these steps.

  1. Rewrite the system of equations in fully implicit form `f(t,y,y') = 0`.
  2. Call `decic` to compute consistent initial conditions for the equations.
  3. Specify `y0_new` as the initial condition in the call to the solver, and specify `yp_new` as the value of the `InitialSlope` option of `odeset`.

See Also

See Also

`ode15i` | `odeget` | `odeset`

Introduced before R2006a

deconv

Deconvolution and polynomial division

Syntax

```
[q,r] = deconv(u,v)
```

Description

`[q,r] = deconv(u,v)` deconvolves a vector `v` out of a vector `u` using long division, and returns the quotient `q` and remainder `r` such that `u = conv(v,q)+r`. If `u` and `v` are vectors of polynomial coefficients, then deconvolving them is equivalent to dividing the polynomial represented by `u` by the polynomial represented by `v`.

Examples

Polynomial Division

Create two vectors `u` and `v` containing the coefficients of the polynomials $2x^3 + 7x^2 + 4x + 9$ and $x^2 + 1$, respectively. Divide the first polynomial by the second by deconvolving `v` out of `u`, which results in quotient coefficients corresponding to the polynomial $2x + 7$ and remainder coefficients corresponding to $2x + 2$.

```
u = [2 7 4 9];
v = [1 0 1];
[q,r] = deconv(u,v)
```

```
q =

     2     7


r =

     0     0     2     2
```

Input Arguments

`u,v` — Input vectors

row or column vectors

Input vectors, specified as either row or column vectors. `u` and `v` can be different lengths or data types. If one or both of `u` and `v` are of type single, then the output is also of type single. Otherwise, `deconv` returns `type` double.

Data Types: `double` | `single`
Complex Number Support: Yes

Output Arguments

`q` — Quotient

row or column vector

Quotient, returned as a row or column vector such that `u = conv(v,q)+r`.

Data Types: `double` | `single`

`r` — Remainder

row or column vector

Remainder, returned as a row or column vector such that `u = conv(v,q)+r`.

Data Types: `double` | `single`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

See Also

`conv` | `residue`

Introduced before R2006a

deg2rad

Convert angle from degrees to radians

Syntax

```
R = deg2rad(D)
```

Description

`R = deg2rad(D)` converts angle units from degrees to radians for each element of `D`.

Examples

Right Angle in Radians

Convert a 90 degree angle into radians.

```
R = deg2rad(90)
```

```
R = 1.5708
```

Surface Distance

Specify the spherical distance between Munich and Bangalore in degrees and the mean radius of Earth in kilometers. Compute the distance (measured along the Earth's surface) between Munich and Bangalore, in kilometers.

```
D = 64.7;
radEarth = 6371;
R = deg2rad(D);
dist = radEarth*R
```

```
dist = 7.1943e+03
```

Input Arguments

D — Angle in degrees

scalar | vector | matrix | multidimensional array

Angle in degrees, specified as a scalar, vector, matrix, or multidimensional array. If D contains complex elements, deg2rad converts the real and imaginary parts separately.

Data Types: single | double
Complex Number Support: Yes

Output Arguments

R — Angle in radians

scalar | vector | matrix | multidimensional array

Angle in radians, returned as a scalar, vector, matrix, or multidimensional array. R is the same size as D.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`rad2deg`

Introduced in R2015b

del2

Discrete Laplacian

Syntax

```
L = del2(U)
L = del2(U,h)
L = del2(U,h1,...,hN)
```

Description

`L = del2(U)` returns a discrete approximation of Laplace's differential operator applied to `U` using the default spacing, `h = 1`, between all points.

`L = del2(U,h)` specifies a uniform, scalar spacing, `h`, between points in all dimensions of `U`.

`L = del2(U,h1,...,hN)` specifies the spacing, `h1,...,hN`, between points in each corresponding dimension of `U`. For each dimension, specify the spacing as a scalar or a vector of coordinates. The number of spacing inputs must equal the number of dimensions in `U`.

Examples

Second Derivative of Vector

Calculate the acceleration of an object from a vector of position data.

Create a vector of position data.

```
p = [1 3 6 10 16 18 29];
```

To find the acceleration of the object, use `del2` to calculate the second numerical derivative of `p`. Use the default spacing `h = 1` between data points.

```
L = 4*del2(p)
```

```
L =

     1     1     1     2    -4     9    22
```

Each value of `L` is an approximation of the instantaneous acceleration at that point.

Second Derivative of Cosine Vector

Calculate the discrete 1-D Laplacian of a cosine vector.

Define the domain of the function.

```
x = linspace(-2*pi,2*pi);
```

This produces 100 evenly spaced points in the range $-2\pi \le x \le 2\pi$.

Create a vector of cosine values in this domain.

```
U = cos(x);
```

Calculate the Laplacian of `U` using `del2`. Use the domain vector `x` to define the 1-D coordinate of each point in `U`.

```
L = 4*del2(U,x);
```

Analytically, the Laplacian of this function is equal to $\Delta U = -\cos(x)$.

Plot the results.

```
plot(x,U,x,L)
legend('U(x)','L(x)','Location','Best')
```

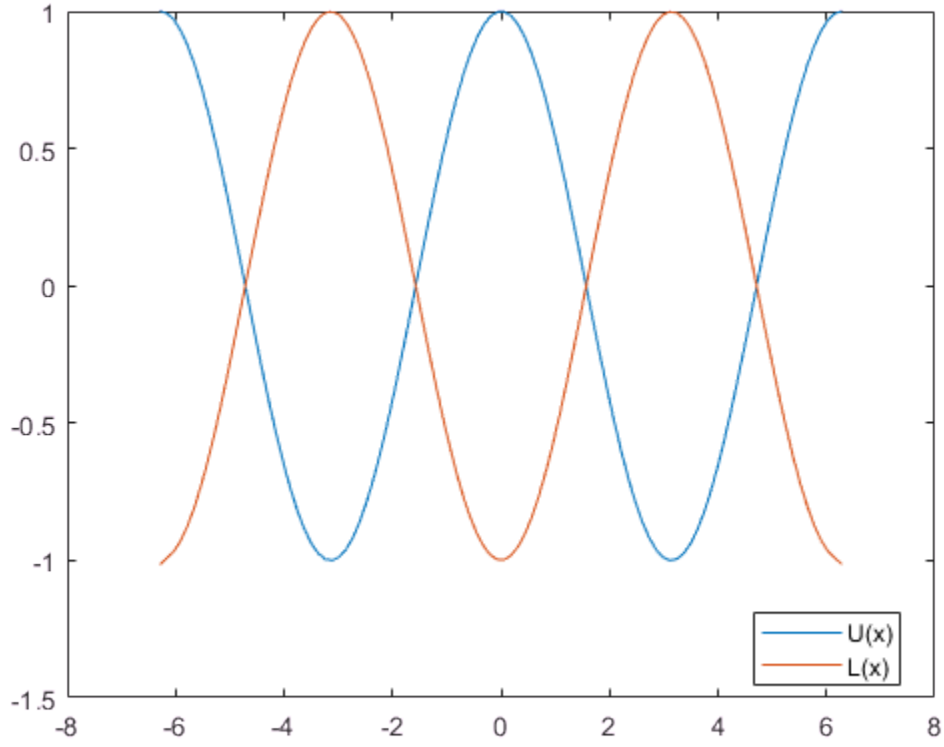

The graph of U and L agrees with the analytic result for the Laplacian.

Laplacian of Multivariate Function

Calculate and plot the discrete Laplacian of a multivariate function.

Define the x and y domain of the function.

```
[x,y] = meshgrid(-5:0.25:5,-5:0.25:5);
```

Define the function $U(x,y) = \frac{1}{3}\left(x^4 + y^4\right)$ over this domain.

```
U = 1/3.*(x.^4+y.^4);
```

Calculate the Laplacian of this function using `del2`. The spacing between the points in `U` is equal in all directions, so you can specify a single spacing input, `h`.

```
h = 0.25;
L = 4*del2(U,h);
```

Analytically, the Laplacian of this function is equal to $\Delta U(x, y) = 4x^2 + 4y^2$.

Plot the discrete Laplacian, `L`.

```
figure
surf(x,y,L)
grid on
title('Plot of $\Delta U(x,y) = 4x^2+4y^2$','Interpreter','latex')
xlabel('x')
ylabel('y')
zlabel('z')
view(35,14)
```

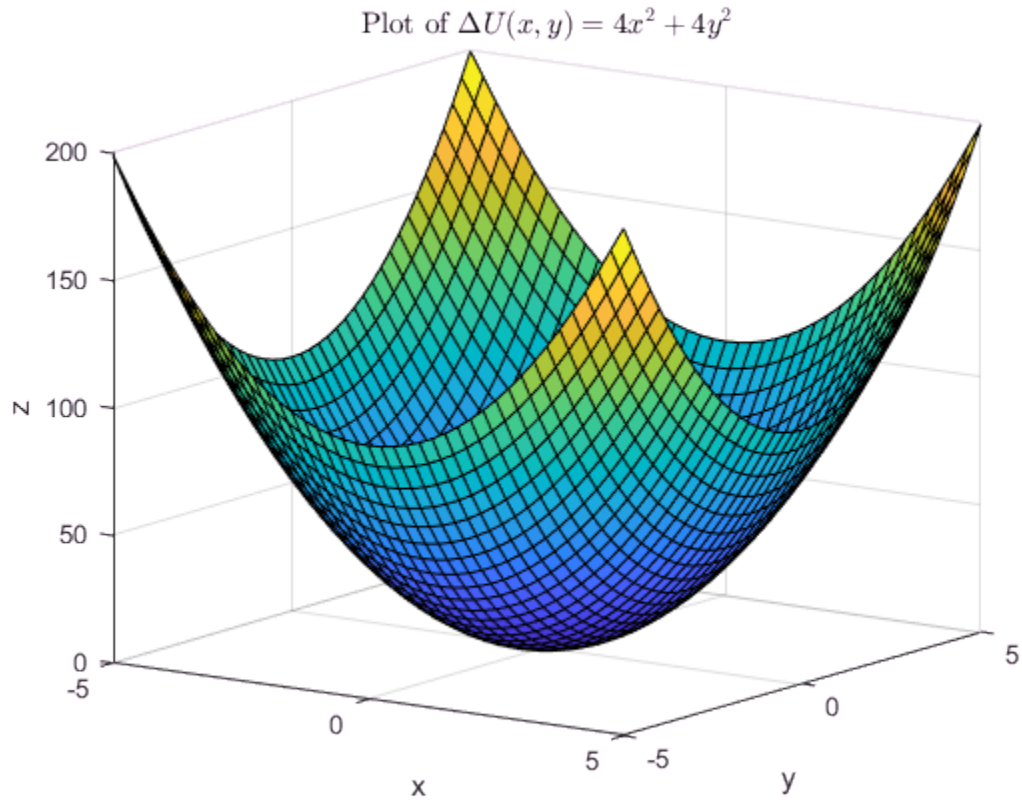

The graph of `L` agrees with the analytic result for the Laplacian.

Laplacian of Natural Logarithm Function

Calculate the discrete Laplacian of a natural logarithm function.

Define the x and y domain of the function on a grid of real numbers.

```
[x,y] = meshgrid(-5:5,-5:0.5:5);
```

Define the function $U(x,y) = \frac{1}{2}\log\left(x^2 y\right)$ over this domain.

```
U = 0.5*log(x.^2.*y);
```

The logarithm is complex-valued when the argument `y` is negative.

Use `del2` to calculate the discrete Laplacian of this function. Specify the spacing between grid points in each direction.

```
hx = 1;
hy = 0.5;
L = 4*del2(U,hx,hy);
```

Analytically, the Laplacian is equal to $\Delta U(x,y) = -\left(1/x^2 + 1/2y^2\right)$. This function is not defined on the lines $x = 0$ or $y = 0$.

Plot the real parts of `U` and `L` on the same graph.

```
figure
surf(x,y,real(L))
hold on
surf(x,y,real(U))
grid on
title('Plot of U(x,y) and $\Delta$ U(x,y)','Interpreter','latex')
xlabel('x')
ylabel('y')
zlabel('z')
view(41,58)
```

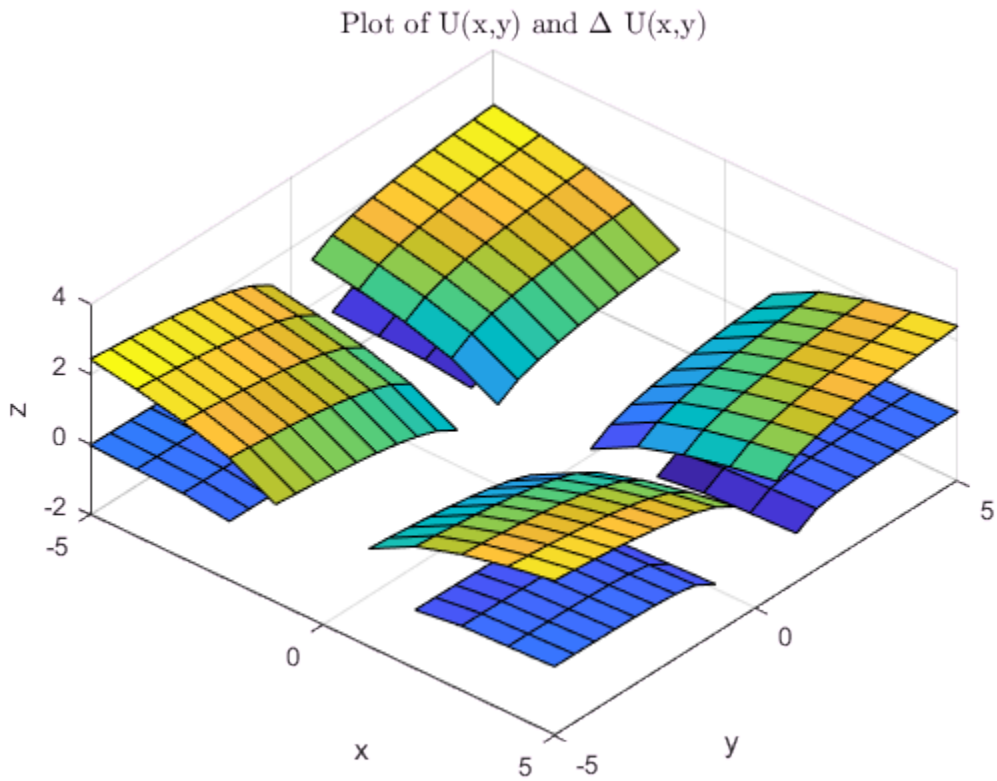

The top surface is U and the bottom surface is L.

Input Arguments

U — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

h — Spacing in all dimensions

1 (default) | scalar

Spacing in all dimensions, specified as 1 (default), or a scalar.

Data Types: `single` | `double`
Complex Number Support: Yes

h1, . . . , hN — Spacing in each dimension

scalars | vectors

Spacing in each dimension, specified as scalars or vectors. The number of spacing inputs must be equal to the number of dimensions in U. Each spacing input defines the spacing between points in the corresponding dimension of U:

- Use a scalar to specify a uniform spacing.
- Use a vector to specify a nonuniform spacing. The coordinate vector gives the position of each point and must have the same number of elements as the corresponding dimension of U (a one-to-one match of coordinates and points).

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

L — Discrete Laplacian approximation

vector | matrix | multidimensional array

Discrete Laplacian approximation, returned as a vector, matrix, or multidimensional array. L is the same size as the input, U.

Definitions

Laplace's differential operator

If a matrix U is a function *U(x,y)* that is evaluated at the points of a square grid, then `4*del2(U)` is a finite difference approximation of Laplace's differential operator applied to *U*,

$$L = \frac{\Delta U}{4} = \frac{1}{4}\left(\frac{\partial^2 U}{\partial x^2} + \frac{\partial^2 U}{\partial y^2}\right).$$

For functions of more variables, *U(x,y,z,...)*, the discrete Laplacian `del2(U)` calculates second-derivatives in each dimension,

$$L = \frac{\Delta U}{2N} = \frac{1}{2N}\left(\frac{\partial^2 U}{\partial x^2} + \frac{\partial^2 U}{\partial y^2} + \frac{\partial^2 U}{\partial z^2} + \ldots\right),$$

where N is the number of dimensions in U and $N \geq 2$.

Algorithms

If the input `U` is a matrix, the interior points of `L` are found by taking the difference between a point in `U` and the average of its four neighbors:

$$L_{ij} = \left[\frac{\left(u_{i+1,j} + u_{i-1,j} + u_{i,j+1} + u_{i,j-1}\right)}{4} - u_{i,j}\right].$$

Then, `del2` calculates the values on the edges of `L` by linearly extrapolating the second differences from the interior. This formula is extended for multidimensional `U`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`diff` | `gradient`

Introduced before R2006a

DelaunayTri class

Superclasses: TriRep

(Not recommended) Delaunay triangulation in 2-D and 3-D

Note: `DelaunayTri` is not recommended. Use delaunayTriangulation instead.

Description

`DelaunayTri` creates a Delaunay triangulation object from a set of points. You can incrementally modify the triangulation by adding or removing points. In 2-D triangulations you can impose edge constraints. You can perform topological and geometric queries, and compute the Voronoi diagram and convex hull.

Construction

.DelaunayTri	(Not recommended) Construct Delaunay triangulation

Methods

convexHull	(Not recommended) Convex hull
inOutStatus	(Not recommended) Status of triangles in 2-D constrained Delaunay triangulation
nearestNeighbor	(Not recommended) Point closest to specified location
pointLocation	(Not recommended) Simplex containing specified location
voronoiDiagram	(Not recommended) Voronoi diagram

Inherited methods

baryToCart	(Not recommended) Convert point coordinates from barycentric to Cartesian
cartToBary	(Not recommended) Convert point coordinates from Cartesian to barycentric
circumcenters	(Not recommended) Circumcenters of specified simplices
edgeAttachments	(Not recommended) Simplices attached to specified edges
edges	(Not recommended) Triangulation edges
faceNormals	(Not recommended) Unit normals to specified triangles
featureEdges	(Not recommended) Sharp edges of surface triangulation
freeBoundary	(Not recommended) Facets referenced by only one simplex
incenters	(Not recommended) Incenters of specified simplices
isEdge	(Not recommended) Test if vertices are joined by edge
neighbors	(Not recommended) Simplex neighbor information
size	(Not recommended) Size of triangulation matrix
vertexAttachments	(Not recommended) Return simplices attached to specified vertices

Properties

`Constraints`	`Constraints` is a `numc`-by-2 matrix that defines the constrained edge data in the triangulation, where `numc` is the number of constrained edges. Each constrained edge is defined in terms of its endpoint indices into `X`.

	The constraints can be specified when the triangulation is constructed or can be imposed afterwards by directly editing the constraints data. This feature is only supported for 2-D triangulations.
`X`	The dimension of `X` is `mpts`-by-`ndim`, where `mpts` is the number of points and `ndim` is the dimension of the space where the points reside. If column vectors of `x`,`y` or `x`,`y`,`z` coordinates are used to construct the triangulation, the data is consolidated into a single matrix `X`.
`Triangulation`	Triangulation is a matrix representing the set of simplices (triangles or tetrahedra etc.) that make up the triangulation. The matrix is of size `mtri`-by-`nv`, where `mtri` is the number of simplices and `nv` is the number of vertices per simplex. The triangulation is represented by standard simplex-vertex format; each row specifies a simplex defined by indices into `X`, where `X` is the array of point coordinates.

Instance Hierarchy

`DelaunayTri` is a subclass of TriRep.

Copy Semantics

Value. To learn how this affects your use of the class, see Comparing Handle and Value Classes in the MATLAB Object-Oriented Programming documentation.

Definitions

2-D Delaunay Triangulation

The 2-D Delaunay triangulation of a set of points is the triangulation in which no point of the set is contained in the circumcircle for any triangle in the triangulation. The definition extends naturally to higher dimensions.

See Also

See Also

delaunayTriangulation | `scatteredInterpolant` | triangulation

DelaunayTri

Class: DelaunayTri

(Not recommended) Construct Delaunay triangulation

Note: `DelaunayTri` is not recommended. Use delaunayTriangulation instead.

Syntax

```
DT = DelaunayTri()
DT = DelaunayTri(X)
DT = DelaunayTri(x,y)
DT = DelaunayTri(x,y,z)
DT = DelaunayTri(..., C)
```

Description

`DT = DelaunayTri()` creates an empty Delaunay triangulation.

`DT = DelaunayTri(X)`, `DT = DelaunayTri(x,y)` and `DT = DelaunayTri(x,y,z)` create a Delaunay triangulation from a set of points. The points can be specified as an `mpts`-by-`ndim` matrix `X`, where `mpts` is the number of points and `ndim` is the dimension of the space where the points reside, where `ndim` is 2 or 3. Alternatively, the points can be specified as column vectors `(x,y)` or `(x,y,z)` for 2-D and 3-D input.

`DT = DelaunayTri(..., C)` creates a constrained Delaunay triangulation. The edge constraints `C` are defined by an `numc`-by-2 matrix, `numc` being the number of constrained edges. Each row of `C` defines a constrained edge in terms of its endpoint indices into the point set `X`. This feature is only supported for 2-D triangulations.

Examples

Compute the Delaunay triangulation of twenty random points located within a unit square.

```
x = rand(20,1);
y = rand(20,1);
dt = DelaunayTri(x,y)
triplot(dt);
```

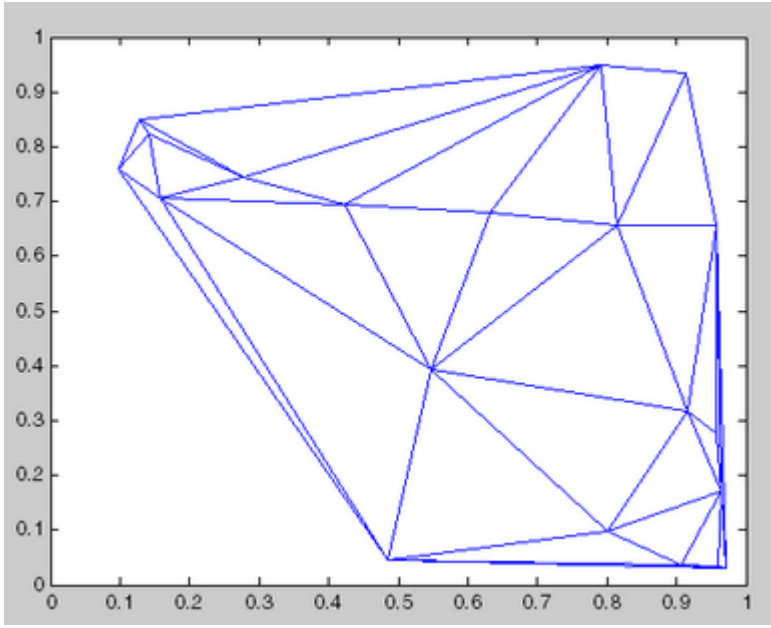

For more examples, type `help demoDelaunayTri` at the MATLAB command-line prompt.

Definitions

2-D Delaunay Triangulation

The 2-D Delaunay triangulation of a set of points is the triangulation in which no point of the set is contained in the circumcircle for any triangle in the triangulation. The definition extends naturally to higher dimensions.

See Also

See Also

delaunayTriangulation | `scatteredInterpolant` | triangulation

delaunay

Delaunay triangulation

Note: Qhull-specific options are no longer supported. Remove the `OPTIONS` argument from all instances in your code that pass it to `delaunay`.

Syntax

```
TRI = delaunay(X,Y)
TRI = delaunay(X,Y,Z)
TRI = delaunay(X)
```

Description

`TRI = delaunay(X,Y)` creates a 2-D Delaunay triangulation of the points (`X`,`Y`), where `X` and `Y` are column-vectors. `TRI` is a matrix representing the set of triangles that make up the triangulation. The matrix is of size `mtri`-by-3, where `mtri` is the number of triangles. Each row of `TRI` specifies a triangle defined by indices with respect to the points.

`TRI = delaunay(X,Y,Z)` creates a 3-D Delaunay triangulation of the points (`X`,`Y`,`Z`), where `X`, `Y`, and `Z` are column-vectors. `TRI` is a matrix representing the set of tetrahedra that make up the triangulation. The matrix is of size `mtri`-by-4, where `mtri` is the number of tetrahedra. Each row of `TRI` specifies a tetrahedron defined by indices with respect to the points.

`TRI = delaunay(X)` creates a 2-D or 3-D Delaunay triangulation from the point coordinates `X`. This variant supports the definition of points in matrix format. `X` is of size `mpts`-by-`ndim`, where `mpts` is the number of points and `ndim` is the dimension of the space where the points reside, $2 \leqq$ `ndim` $\leqq 3$. The output triangulation is equivalent to that of the dedicated functions supporting the 2-input or 3-input calling syntax.

`delaunay` produces an isolated triangulation, useful for applications like plotting surfaces via the `trisurf` function. If you wish to query the triangulation; for example, to

perform nearest neighbor, point location, or topology queries, use delaunayTriangulation instead.

Visualization

Use one of these functions to plot the output of `delaunay`:

`triplot`	Displays the triangles defined in the `m`-by-3 matrix `TRI`.
`trisurf`	Displays each triangle defined in the m-by-3 matrix TRI as a surface in 3-D space. To see a 2-D surface, you can supply a vector of some constant value for the third dimension. For example `trisurf(TRI,x,y,zeros(size(x)))`
`trimesh`	Displays each triangle defined in the m-by-3 matrix TRI as a mesh in 3-D space. To see a 2-D surface, you can supply a vector of some constant value for the third dimension. For example, `trimesh(TRI,x,y,zeros(size(x)))` produces almost the same result as `triplot`, except in 3-D space.
`tetramesh`	Plots a triangulation composed of tetrahedra.

Examples

Plot Delaunay Triangulation

Plot the Delaunay triangulation of a large dataset.

```
load seamount
tri = delaunay(x,y);
trisurf(tri,x,y,z);
```

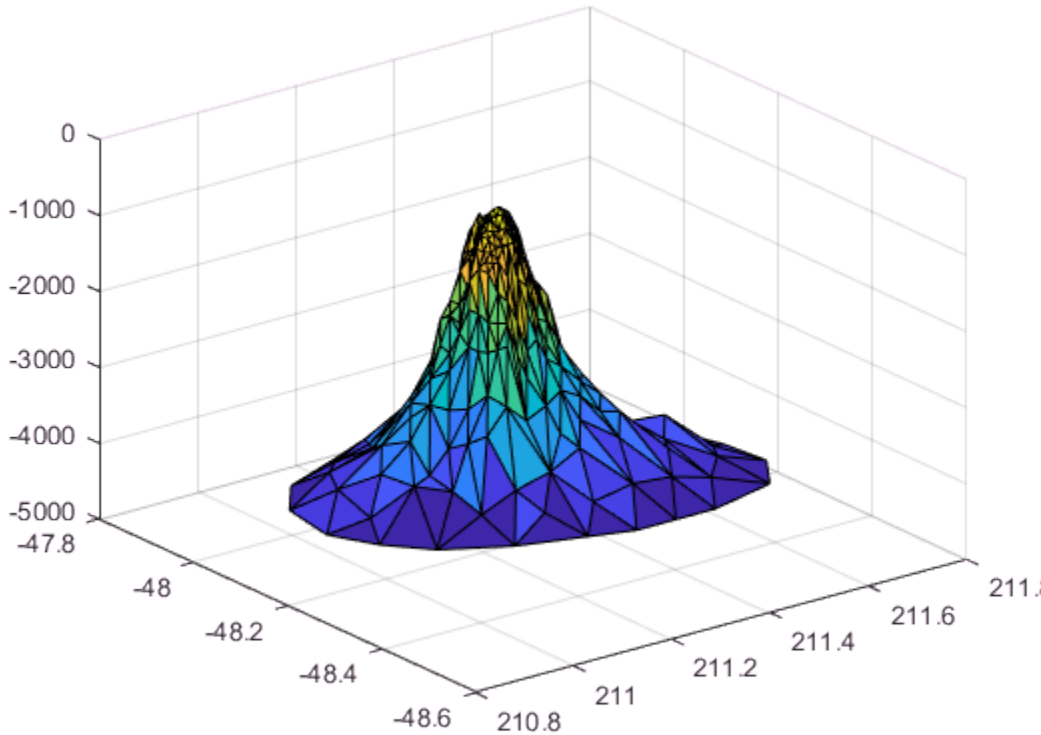

Definitions

Delaunay Triangulation

`delaunay` creates a Delaunay triangulation of a set of points in 2-D or 3-D space. A 2-D Delaunay triangulation ensures that the circumcircle associated with each triangle contains no other point in its interior. This definition extends naturally to higher dimensions.

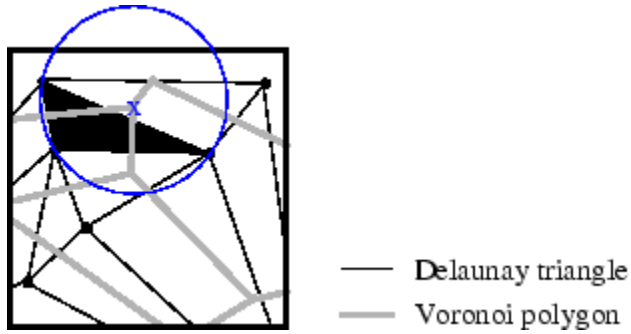

See Also

See Also

delaunayTriangulation | `plot` | `scatteredInterpolant` | `trimesh` | `triplot` | `trisurf`

Introduced before R2006a

delaunayn

N-D Delaunay triangulation

Syntax

```
T = delaunayn(X)
T = delaunayn(X,options)
```

Description

`T = delaunayn(X)` computes a set of simplices such that no data points of `X` are contained in any circumspheres of the simplices. The set of simplices forms the Delaunay triangulation. `X` is an `m`-by-`n` array representing m points in n-dimensional space. `T` is a `numt`-by-(`n+1`) array where each row contains the indices into `X` of the vertices of the corresponding simplex.

`T = delaunayn(X,options)` specifies a cell array of options. The default options are:

- `{'Qt','Qbb','Qc'}` for 2- and 3-dimensional input
- `{'Qt','Qbb','Qc','Qx'}` for 4 and higher-dimensional input

If `options` is `[]`, the default options used. If `options` is `{''}`, no options are used, not even the default.

Visualization

Plotting the output of `delaunayn` depends of the value of `n`:

- For `n = 2`, use `triplot`, `trisurf`, or `trimesh` as you would for `delaunay`.
- For `n = 3`, use `tetramesh`.

  For more control over the color of the facets, use `patch` to plot the output.
- You cannot plot `delaunayn` output for `n > 3`.

Examples

3-D Delaunay Triangulation

This example generates an n-dimensional Delaunay triangulation, where `n = 3`.

```
d = [-1 1];
[x,y,z] = meshgrid(d,d,d);  % A cube
x = [x(:);0];
y = [y(:);0];
z = [z(:);0];
% [x,y,z] are corners of a cube plus the center.
X = [x(:) y(:) z(:)];
Tes = delaunayn(X)
```

```
Tes =

     4     3     9     1
     4     9     2     1
     7     9     3     1
     7     5     9     1
     7     9     4     3
     7     8     4     9
     6     2     9     1
     6     9     5     1
     6     4     9     2
     6     4     8     9
```

You can use `tetramesh` to visualize the tetrahedrons that form the corresponding simplex. `camorbit` rotates the camera position to provide a meaningful view of the figure.

```
tetramesh(Tes,X);
camorbit(20,0)
```

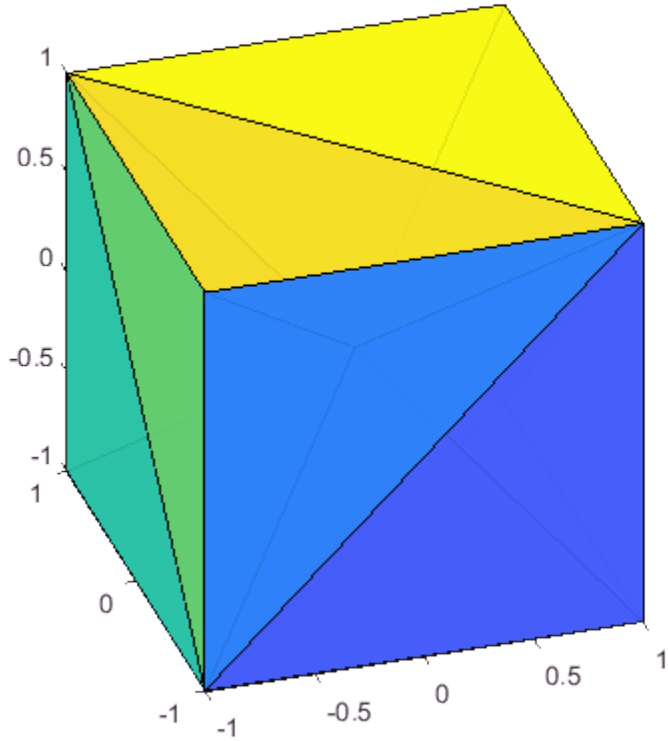

See Also

delaunayTriangulation | `convhulln` | `tetramesh` | `voronoin` | `camorbit`

Introduced before R2006a

delaunayTriangulation class

Superclasses: triangulation

Delaunay triangulation in 2-D and 3-D

Description

Use the `delaunayTriangulation` class to create a 2-D or 3-D triangulation from a set of points. When your points are in 2-D, you can specify edge constraints .

You can perform a variety of topological and geometric queries on a `delaunayTriangulation`, including any triangulation query. For example, locate a facet that contains a specific point, find the vertices of the convex hull, or compute the Voronoi Diagram.

Construction

`DT = delaunayTriangulation(P)` creates a Delaunay triangulation from the points in `P`. Matrix `P` has 2 or 3 columns, depending on whether your points are in 2-D or 3-D space.

`DT = delaunayTriangulation(P,C)` specifies the edge constraints in matrix `C`. In this case, `P` specifies points in 2-D. Each row of `C` defines the start and end vertex IDs of a constrained edge.

`DT = delaunayTriangulation(x,y)` creates a 2-D Delaunay triangulation from the point coordinates in the column vectors, `x` and `y`.

`DT = delaunayTriangulation(x,y,C)` specifies the edge constraints in matrix `C`.

`DT = delaunayTriangulation(x,y,z)` creates a 3-D Delaunay triangulation from the point coordinates in the column vectors, `x`, `y`, and `z`.

`DT = delaunayTriangulation()` creates an empty Delaunay triangulation.

Input Arguments

P

Input points, specified as a matrix whose columns are the *x*, *y*, (and possibly *z*) coordinates of the triangulation points. The row numbers of `P` are the vertex IDs in the triangulation.

x

x-coordinates vector, specified as a column vector containing the *x*-coordinates of the triangulation points.

y

y-coordinates vector, specified as a column vector containing the *y*-coordinates of the triangulation points.

z

z-coordinates vector, specified as a column vector containing the *z*-coordinates of the triangulation points.

C

Vertex IDs of constrained edges, specified as a 2-column matrix. Each row of `C` corresponds to a constrained edge and contains two IDs:

- `C(j,1)` is the ID of the vertex at the start of an edge.
- `C(j,2)` is the ID of the vertex at end of the edge.

You can specify edge constraints for 2-D triangulations only.

Properties

Points

Points in the triangulation, represented as a matrix containing the following information:

- Each row in `DT.Points` contains the coordinates of a vertex.
- Each row number of `DT.Points` is a vertex ID.

ConnectivityList

Triangulation connectivity list, represented as a matrix. This matrix contains the following information:

- Each row represents a triangle or tetrahedron in the triangulation.
- Each row number of `DT.ConnectivityList` is a "Triangle or Tetrahedron ID" on page 1-2446.
- Each element is a vertex ID.

Constraints

Constrained edges, represented as a two-column matrix of vertex IDs. Each row of `DT.Constraints` corresponds to a constrained edge and contains two IDs:

- `DT.Constraints(j,1)` is the ID of the vertex at the start of an edge.
- `DT.Constraints(j,2)` is the ID of the vertex at end of the edge.

`DT.Constraints` is an empty matrix when the triangulation has no constrained edges.

Methods

convexHull	Convex hull
isInterior	Test if triangle is in interior of 2-D constrained Delaunay triangulation
voronoiDiagram	Voronoi diagram

Inherited Methods

barycentricToCartesian	Converts point coordinates from barycentric to Cartesian
cartesianToBarycentric	Converts point coordinates from Cartesian to barycentric
circumcenter	Circumcenter of triangle or tetrahedron
edgeAttachments	Triangles or tetrahedra attached to specified edge
edges	Triangulation edges

faceNormal	Triangulation face normal
featureEdges	Triangulation sharp edges
freeBoundary	Triangulation facets referenced by only one triangle or tetrahedron
incenter	Incenter of triangle or tetrahedron
isConnected	Test if two vertices are connected by edge
nearestNeighbor	Vertex closest to specified location
neighbors	Neighbors to specified triangle or tetrahedron
pointLocation	Triangle or tetrahedron containing specified point
size	Size of triangulation connectivity list
vertexAttachments	Triangles or tetrahedra attached to specified vertex
vertexNormal	Triangulation vertex normal

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

2-D Delaunay Triangulation

Create a 2-D `delaunayTriangulation` for 30 random points.

```
P = gallery('uniformdata',[30 2],0);
DT = delaunayTriangulation(P)
```

```
DT 
  delaunayTriangulation with properties:

              Points: [30×2 double]
    ConnectivityList: [50×3 double]
         Constraints: []
```

Plot the triangulation.

```
figure
triplot(DT)
```

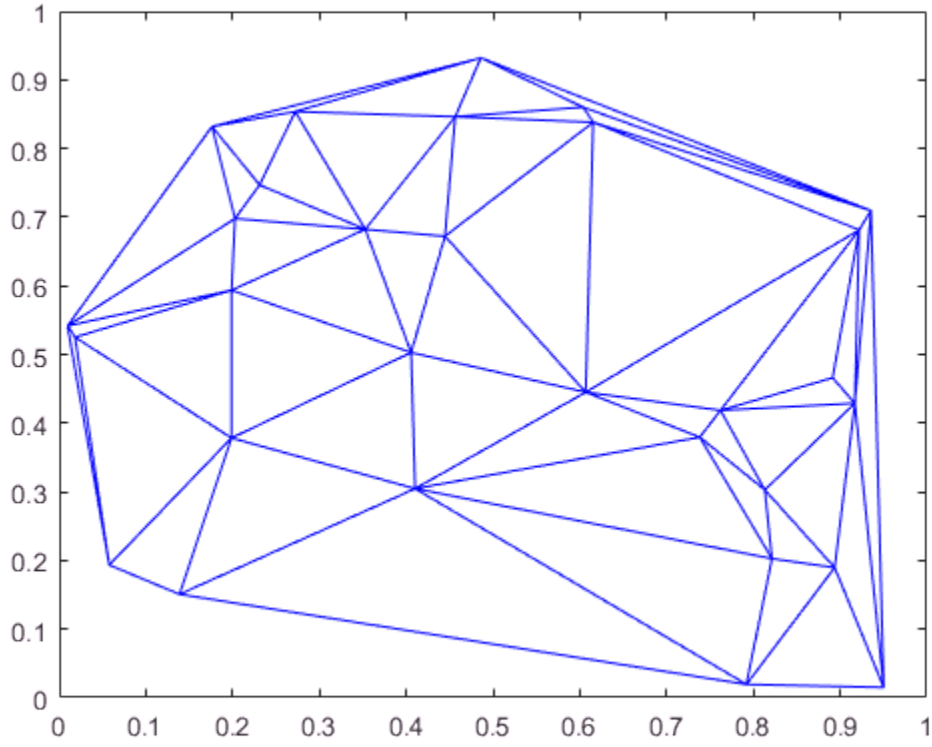

3-D Delaunay Triangulation

Create a 3-D `delaunayTriangulation` for 30 random points.

```
x = gallery('uniformdata',[30 1],0);
y = gallery('uniformdata',[30 1],1);
z = gallery('uniformdata',[30 1],2);
```

```
DT = delaunayTriangulation(x,y,z)
```

```
DT = 
  delaunayTriangulation with properties:

              Points: [30×3 double]
    ConnectivityList: [111×4 double]
         Constraints: []
```

Plot the triangulation at 30% opacity with a light blue face color.

```
faceColor  = [0.6875 0.8750 0.8984];
figure
tetramesh(DT,'FaceColor',faceColor,'FaceAlpha',0.3);
```

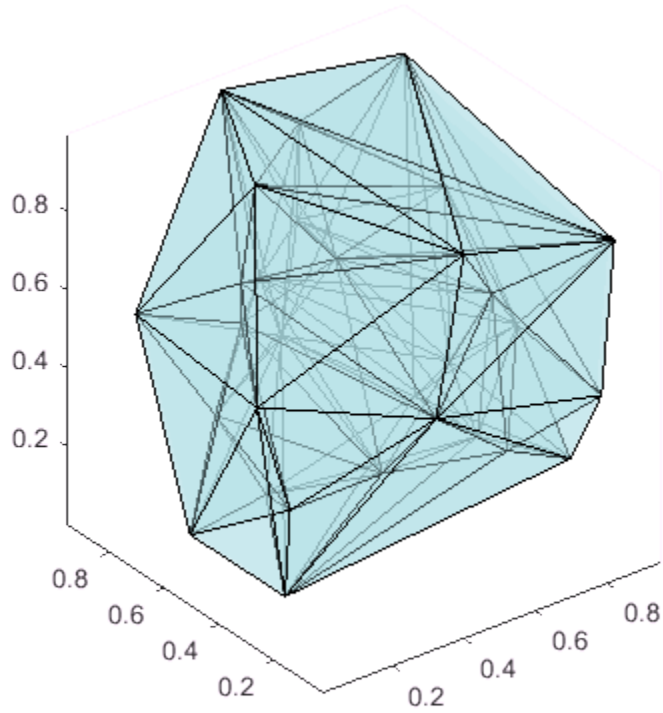

Definitions

Delaunay Triangulation

In a 2-D Delaunay triangulation, the circumcircle associated with each triangle does not contain any points in its interior. Similarly, a 3-D Delaunay triangulation does not have any points in the interior of the circumsphere associated with each tetrahedron. This definition extends to N-D, although `delaunayTriangulation` supports only 2-D and 3-D.

Vertex ID

A row number of the matrix, `DT.Points`. Use this ID to refer a specific vertex in the triangulation.

Triangle or Tetrahedron ID

A row number of the matrix, `DT.ConnectivityList`. Use this ID to refer a specific triangle or tetrahedron.

See Also

See Also

`delaunay` | `delaunayn` | triangulation

convexHull

Class: delaunayTriangulation

Convex hull

Syntax

```
K = convexHull(DT)
[K,v] = convexHull(DT)
```

Description

`K = convexHull(DT)` returns the vertices of the convex hull.

`[K,v] = convexHull(DT)` also returns the area or volume bounded by the convex hull.

Input Arguments

DT

A Delaunay triangulation, see delaunayTriangulation.

Output Arguments

K

Convex hull vertices, returned as a matrix of vertex IDs. The shape of `K` depends on whether your triangulation is 2-D or 3-D:

- When `DT` is 2-D, `K` is a column vector containing the sequence of vertex IDs around the convex hull.
- When `DT` is 3-D, `K` is a triangulation connectivity list containing the triangles on the convex hull.

v

Area or volume bounded by the convex hull, returned as a scalar value.

Examples

Convex Hull in 2-D Space

Create a Delaunay triangulation from a set of random points.

```
x = gallery('uniformdata',[10,1],0);
y = gallery('uniformdata',[10,1],1);
DT = delaunayTriangulation(x,y);
```

Calculate the convex hull.

```
k = convexHull(DT)
```

```
k =

     1
     3
     2
     8
     9
     1
```

Plot the points and highlight the convex hull in red.

```
figure
plot(DT.Points(:,1),DT.Points(:,2), '.','markersize',10);
hold on
plot(DT.Points(k,1),DT.Points(k,2),'r')
hold off
```

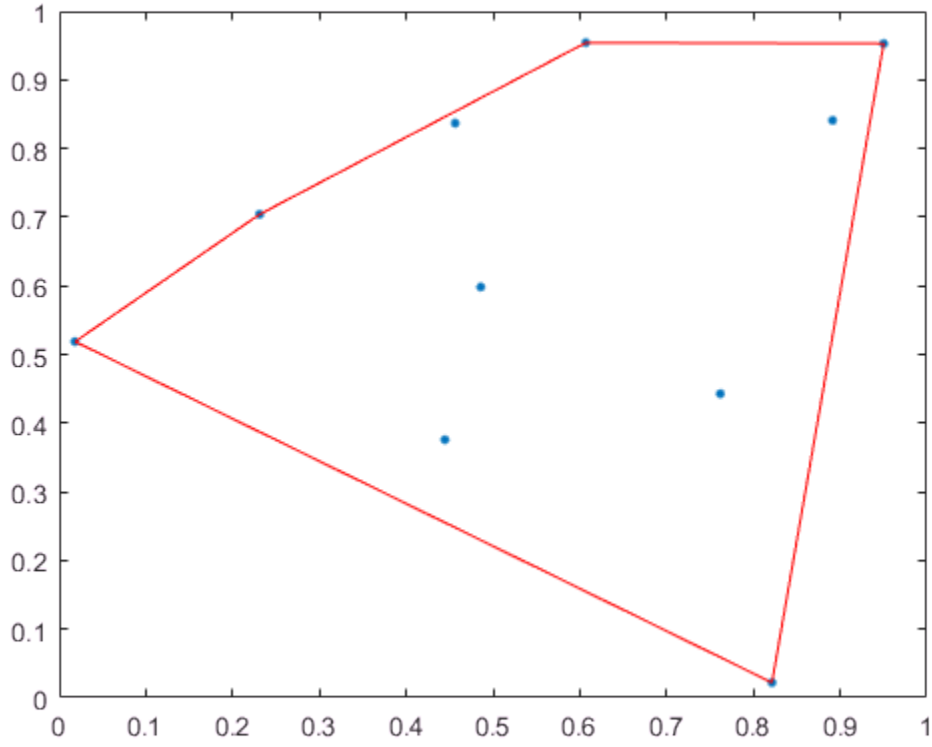

Convex Hull in 3-D Space

Use `convexHull` to calculate the convex hull of a set of random points within a unit cube.

Create a Delaunay triangulation from a set of random points.

```
P = gallery('uniformdata',[25,3],1);
DT = delaunayTriangulation(P);
```

Calculate the convex hull and the volume bounded by the convex hull.

```
[K,v] = convexHull(DT);
```

Examine the volume.

```
v
```

```
v = 0.3561
```

Plot the convex hull.

```
trisurf(K,DT.Points(:,1),DT.Points(:,2),DT.Points(:,3),...
        'FaceColor','cyan')
```

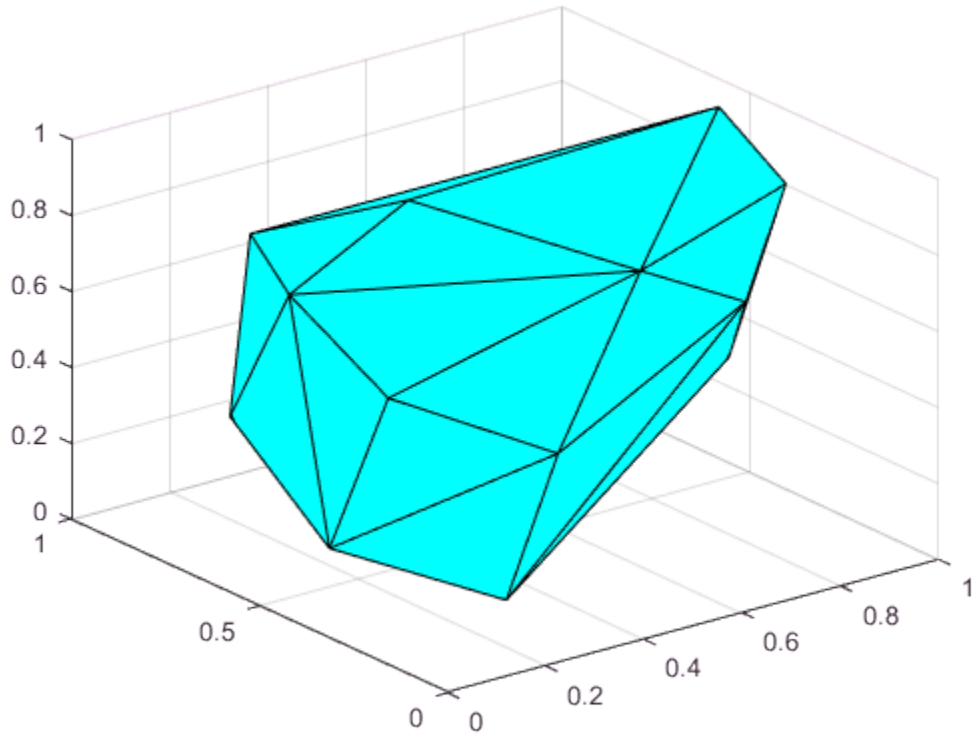

Definitions

Vertex ID

A row number of the matrix, `DT.Points`. Use this ID to refer a specific vertex in the triangulation.

See Also

See Also

`convhull` | `convhulln` | triangulation | voronoiDiagram

isInterior

Class: delaunayTriangulation

Test if triangle is in interior of 2-D constrained Delaunay triangulation

Syntax

```
tf = isInterior(DT)
```

Description

`tf = isInterior(DT)` returns an array of logical values that indicate whether the triangles in a constrained Delaunay triangulation are inside a bounded geometric domain. A bounded domain is a region enclosed by multiple constrained edges that do not intersect or overlap. A triangle, `DT.ConnectivityList(j,:)`, is classified as inside the domain when `tf(j)` is `true`. Otherwise, the triangle is outside the domain.

Input Arguments

DT

A 2-D delaunayTriangulation that has a set of constrained edges that define a bounded geometric domain.

Output Arguments

tf

Logical values, returned as a column vector. Element `tf(j)` is `true` when the triangle whose ID is `j` is inside the domain of `DT`.

Examples

Find and Plot Triangles within a Boundary

Create a geometric domain whose shape is a square frame.

```
outerprofile = [-5 -5; -3 -5; -1 -5;  1 -5;
                 3 -5;  5 -5;  5 -3;  5 -1;
                 5  1;  5  3;  5  5;  3  5;
                 1  5; -1  5; -3  5; -5  5;
                -5  3; -5  1; -5 -1; -5 -3];

innerprofile = outerprofile.*0.5;
profile = [outerprofile; innerprofile];
```

Define the edge constraints.

```
outercons = [(1:19)' (2:20)'; 20 1;];
innercons = [(21:39)' (22:40)'; 40 21];
C = [outercons; innercons];
```

Create the constrained Delaunay triangulation.

```
DT = delaunayTriangulation(profile,C);
```

Plot the triangulation.

```
figure
subplot(1,2,1)
triplot(DT)

% Highlight the inner square in red.
hold on
plot(DT.Points(innercons',1),DT.Points(innercons',2),...
     '-r','LineWidth',2)

% Highlight the outer square in red and resize the |x| and |y| axes to make
% the plot square.
plot(DT.Points(outercons',1),DT.Points(outercons',2), ...
     '-r','LineWidth', 2)
axis equal

% Plot only the triangles that lie inside of the domain.
hold off
```

```
subplot(1,2,2)
inside = isInterior(DT);
triplot(DT.ConnectivityList(inside, :),DT.Points(:,1),DT.Points(:,2))

% Highlight the inner and outer squares in red.
hold on
plot(DT.Points(outercons',1),DT.Points(outercons',2), ...
     '-r','LineWidth', 2)
plot(DT.Points(innercons',1),DT.Points(innercons',2), ...
     '-r','LineWidth', 2)
axis equal
hold off
```

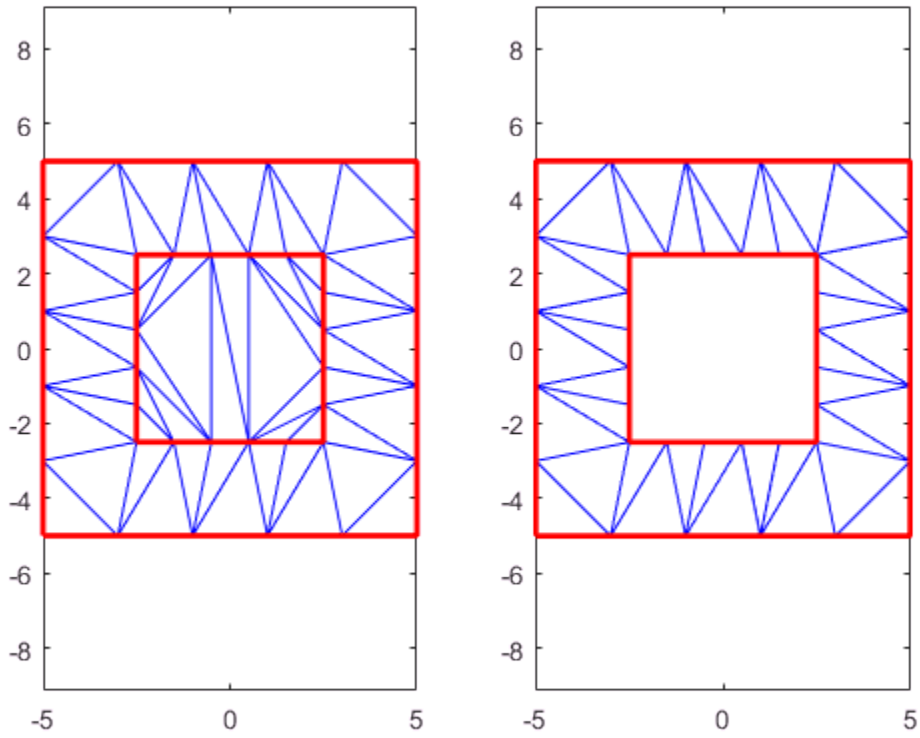

Definitions

Triangle ID

A row number of the matrix, `DT.ConnectivityList`. You use this ID to refer a specific triangle.

Tips

- `isInterior` can produce incorrect or inconsistent results when boundary constraints intersect or overlap. To avoid this behavior, use constraints that form one or multiple closed boundaries that do not intersect or overlap. When boundary constraints are nested without intersections or overlaps, the inside or outside status alternates across the boundaries.

See Also

See Also

triangulation

voronoiDiagram

Class: delaunayTriangulation

Voronoi diagram

Syntax

```
[V,R] = voronoiDiagram(DT)
```

Description

`[V,R] = voronoiDiagram(DT)` returns the Voronoi vertices, `V`, and the Voronoi regions, `R`, of the points, `DT.Points`.

The *Voronoi diagram* of a set of points, such as `DT.Points`, decomposes the space around each point, `DT.Points(j,:)`, into a region of influence, `R{j}`. Locations within the region, `R{j}`, are closer to point `j` than any other point in `DT.Points`. The region of influence is called the *Voronoi region*. The collection of all the Voronoi regions is the Voronoi diagram.

The Voronoi regions associated with points that lie on the convex hull of `DT.Points` are unbounded. Bounding edges of these regions radiate to infinity. The vertex at infinity is represented by the first vertex in `V`.

Input Arguments

DT

A Delaunay triangulation, see delaunayTriangulation.

Output Arguments

V

Voronoi vertices, returned as a matrix. Each row of `V` contains the coordinates of a Voronoi vertex.

R

Voronoi regions, returned as a vector cell array the same length as `DT.Points`. The elements of `R` are row numbers of `V`. The coordinates of the Voronoi vertices bounding a region are `V(R{j},:)`. The Voronoi region associated with the point `DT.Points(j)` is `R{j}`.

Examples

Compute the Voronoi Diagram of a 2-D Triangulation

Create a Delaunay triangulation from a set of points.

```
P = [ 0.5    0
      0      0.5
     -0.5   -0.5
     -0.2   -0.1
     -0.1    0.1
      0.1   -0.1
      0.1    0.1 ];
DT = delaunayTriangulation(P);
```

Calculate the Voronoi vertices and regions.

```
[V,R] = voronoiDiagram(DT);
```

Examine the connectivity of the Voronoi region associated with the third point in the triangulation.

```
R{3}
```

```
ans =

     1    10     7     4
```

Examine the coordinates of the Voronoi vertices bounding the region.

```
V(R{3},:)
```

```
ans =

       Inf       Inf
```

```
    0.7000   -1.6500
   -0.0500   -0.5250
   -1.7500    0.7500
```

The `Inf` values indicate that the region contains points on the convex hull.

See Also

See Also

convexHull | triangulation | `voronoi` | `voronoin`

delete

Delete files or objects

Syntax

```
delete filename
delete filename1 ... filenameN
delete(h)
delete(handle_array)
```

Description

`delete filename` deletes `filename` from disk, without requesting verification. To change whether the specified file is permanently deleted or sent to the recycle bin, change the **Delete files** preference. To do so, go to the **Home** tab and in the **Environment** section, click **Preferences**. Select **MATLAB > General** and choose from one of the two options in the **Delete files** section.

Note: On Mac platforms, the **Delete files** preference is not applied to files deleted from network drives.

`delete filename1 ... filenameN` deletes the specified files from disk.

`delete(h)` deletes the object `h`. If `h` is an array, `delete` deletes all objects in the array.

`delete(handle_array)` is a method of the handle class. It removes from memory the handle objects referenced by `handle_array`. For more information, see handle.delete.

Examples

Delete Files in Folder

Delete all files in the current folder with a `.mat` extension.

```
delete *.mat
```

Delete Graphics Objects

Delete a graphics object and graphics object array.

Create a figure and an axes, and then delete the axes. The axes is deleted, but the figure remains. The axes variable `ax` remains in the workspace, but no longer refers to an object.

```
fig = figure;
ax = axes;
delete(ax)
display(ax)
```

```
ax =

  handle to deleted Axes
```

Delete all the line objects created by plot.

```
H = plot(magic(5));
delete(H)
```

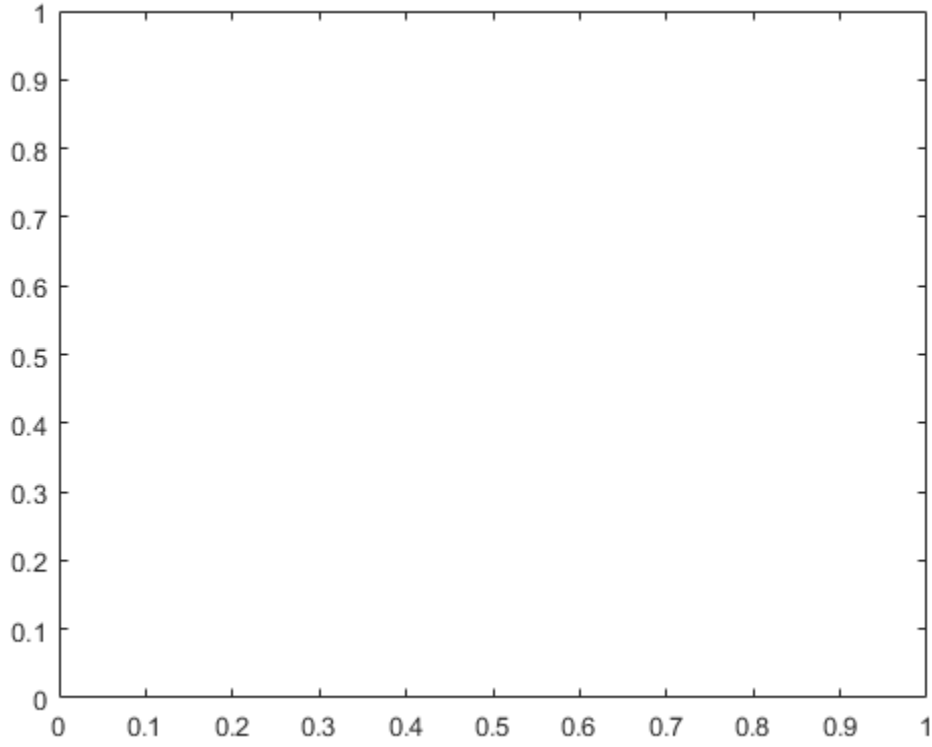

Input Arguments

`filename` — Name of file to delete

character vector

Name of file to delete, specified as a character vector. `filename` can be an absolute or relative path and can include wildcards (*).

`h` — Object to delete

object | object array

Object to delete, specified as an object or an object array.

See Also

See Also

handle.delete | `clear` | `dir` | `recycle` | `rmdir`

Topics

"Specify File Names"

Introduced before R2006a

delete (COM)

Remove COM control or server

Syntax

```
delete(h)
```

Description

`delete(h)` releases all interfaces derived from the specified COM server or control, and then deletes the server or control itself.

The `release` function releases and invalidates an interface but does not delete the server or control.

COM functions are available on Microsoft Windows systems only.

See Also

`save (COM)` | `load (COM)` | `release` | `actxcontrol` | `actxserver`

Introduced before R2006a

delete

Class: FTP

Remove file on FTP server

Syntax

```
delete(ftpobj,filename)
```

Description

`delete(ftpobj,filename)` removes the specified file from the current folder on the FTP server associated with `ftpobj`.

Input Arguments

`ftpobj`

FTP object created by ftp.

`filename`

Character vector enclosed in single quotation marks that specifies the name of the file to delete.

Examples

Suppose that a hypothetical host, `ftp.testsite.com`, contains `myfile.m`. Connect to the server and delete the file:

```
ts = ftp('ftp.testsite.com');
delete(ts,'myfile.m');
```

See Also

rmdir | ftp

Introduced before R2006a

delete (serial)

Remove serial port object from memory

Syntax

```
delete(obj)
```

Description

`delete(obj)` removes `obj` from memory, where `obj` is a serial port object or an array of serial port objects.

Examples

This example creates the serial port object `s` on a Windows platform, connects `s` to the device, writes and reads text data, disconnects `s` from the device, removes `s` from memory using `delete`, and then removes `s` from the workspace using `clear`.

```
s = serial('COM1');
fopen(s)
fprintf(s,'*IDN?')
idn = fscanf(s);
fclose(s)
delete(s)
clear s
```

Tips

When you delete `obj`, it becomes an *invalid* object. Because you cannot connect an invalid serial port object to the device, you should remove it from the workspace with the `clear` command. If multiple references to `obj` exist in the workspace, then deleting one reference invalidates the remaining references.

If `obj` is connected to the device, it has a `Status` property value of `open`. If you issue `delete` while `obj` is connected, then the connection is automatically broken. You can also disconnect `obj` from the device with the `fclose` function.

See Also

`clear` | `isvalid` | `fclose` | `Status`

Introduced before R2006a

deleteproperty

Remove custom property from COM object

Syntax

```
deleteproperty(h,'name')
```

Description

`deleteproperty(h,'name')` deletes property specified by `name` from custom properties belonging to object or interface `h`.

You can only delete properties created with the `addproperty` function.

COM functions are available on Microsoft Windows systems only.

Examples

This example removes a custom property from an instance of the MATLAB sample control.

1. Create an instance of the control.

```
f = figure('position',[100 200 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],f);
get(h)
```

```
     Label: 'Label'
    Radius: 20
```

2. Add a custom property named `Position` and assign a value:

```
addproperty(h,'Position')
h.Position = [200 120];
get(h)
```

```
       Label: 'Label'
      Radius: 20
```

```
    Position: [200 120]
```

3 Delete the custom property `Position`. MATLAB displays the original list of properties.

```
deleteproperty(h,'Position')
get(h)
```

```
     Label: 'Label'
    Radius: 20
```

See Also

`addproperty` | `set (COM)` | `get (COM)` | `inspect`

Topics

Introduced before R2006a

delevent

Remove `tsdata.event` objects from `timeseries` object

Syntax

```
ts = delevent(ts,event)
ts = delevent(ts,events)
ts = delevent(ts,event,n)
```

Description

`ts = delevent(ts,event)` removes the `tsdata.event` object from the `ts.events` property, where `event` is an event name string.

`ts = delevent(ts,events)` removes the `tsdata.event` object from the `ts.events` property, where `events` is a cell array of event name strings.

`ts = delevent(ts,event,n)` removes the `n`th `tsdata.event` object from the `ts.events` property. `event` is the name of the `tsdata.event` object.

Examples

The following example shows how to remove an event from a `timeseries` object:

1. Create a time series.

   ```
   ts = timeseries(rand(5,4))
   ```

2. Create an event object called `'test'` such that the event occurs at time `3`.

   ```
   e = tsdata.event('test',3)
   ```

3. Add the event object to the time series `ts`.

   ```
   ts = addevent(ts,e)
   ```

4. Remove the event object from the time series `ts`.

   ```
   ts = delevent(ts,'test')
   ```

See Also

`addevent` | timeseries | `tsdata.event`

Introduced before R2006a

delsamplefromcollection

Remove sample from `tscollection` object

Syntax

```
tsc = delsamplefromcollection(tsc,'Index',N)
tsc = delsamplefromcollection(tsc,'Value',Time)
```

Description

`tsc = delsamplefromcollection(tsc,'Index',N)` deletes samples from the `tscollection` object tsc. N specifies the indices of the tsc time vector that correspond to the samples you want to delete.

`tsc = delsamplefromcollection(tsc,'Value',Time)` deletes samples from the `tscollection` object tsc. Time specifies the time values that correspond to the samples you want to delete.

See Also

`addsampletocollection` | `tscollection`

Introduced before R2006a

demo

Access product examples in Help browser

Syntax

```
demo
demo type
demo type name
```

Description

`demo` displays a list of featured MATLAB and Simulink examples in the Help browser.

`demo type` lists the examples for the specified product. Valid values for `type` are `matlab` or `simulink`.

`demo type name` lists the examples for products other than MATLAB or Simulink. Valid values for `type` include `matlab`, `simulink`, `toolbox`, or `blockset`.

Examples

Open MATLAB Examples

```
demo matlab
```

Open Statistics and Machine Learning Toolbox Examples

```
demo toolbox statistics
```

Open Communications System Toolbox Examples

```
demo toolbox 'communications system'
```

Open Simulink Control Design Examples

```
demo simulink 'simulink control design'
```

Input Arguments

`type` — Product name or type

`matlab` (default) | `simulink` | `toolbox` | `blockset`

Product name or type, specified as `'matlab'`, `'simulink'`, `'toolbox'`, or `'blockset'`. For products other than MATLAB or Simulink, you must also specify a `name` input that corresponds to the product name.

`name` — Product name other than MATLAB or Simulink

character vector

Product name other than MATLAB or Simulink, specified as a character vector. If `name` requires multiple words, enclose it in single quotes.

Tips

- To access third-party and custom examples without using the `demo` command, open the Help browser and navigate to the documentation home page. Then, at the bottom of the page, click **Supplemental Software**.

See Also

See Also

`doc` | `echodemo` | `grabcode` | `help`

Introduced before R2006a

det

Matrix determinant

Syntax

```
d = det(A)
```

Description

`d = det(A)` returns the determinant of square matrix `A`.

Examples

Calculate Determinant of Matrix

Create a 3-by-3 square matrix, `A`.

```
A = [1 -2 4; -5 2 0; 1 0 3]
```

```
A =

     1    -2     4
    -5     2     0
     1     0     3
```

Calculate the determinant of `A`.

```
d = det(A)
```

```
d = -32
```

Determine if Matrix Is Singular

Examine why the determinant is not an accurate measure of singularity.

Create a 10-by-10 matrix by multiplying an identity matrix, `eye(10)`, by a small number.

```
A = eye(10)*0.0001;
```

The matrix A has very small entries along the main diagonal. However, A is *not* singular, because it is a multiple of the identity matrix.

Calculate the determinant of A.

```
d = det(A)
```

```
d = 1.0000e-40
```

The determinant is extremely small. A tolerance test of the form `abs(det(A)) < tol` is likely to flag this matrix as singular. Although the determinant of the matrix is close to zero, A is actually not ill conditioned. Therefore, A is not close to being singular. The determinant of a matrix can be arbitrarily close to zero without conveying information about singularity.

To investigate if A is singular, use either the `cond` or `rcond` functions.

Calculate the condition number of A.

```
c = cond(A)
```

```
c = 1
```

The result confirms that A is not ill conditioned.

Compute Determinant of Inverse of Ill-Conditioned Matrix

Examine how to calculate the determinant of the matrix inverse `A^(-1)`, for an ill-conditioned matrix A, without explicitly calculating `A^(-1)`.

Create a 10-by-10 Hilbert matrix, A.

```
A = hilb(10);
```

Find the condition number of A.

```
c = cond(A)
```

```
c = 1.6025e+13
```

The large condition number suggests that A is close to being singular, so calculating `inv(A)` might produce inaccurate results. Therefore, the inverse determinant calculation `det(inv(A))` is also inaccurate.

Calculate the determinant of the inverse of A by exploiting the fact that

$$det\left(A^{-1}\right) = \frac{1}{det\left(A\right)}$$

```
d1 = 1/det(A)
```

```
d1 = 4.6202e+52
```

This method avoids computing the inverse of the matrix, A.

Calculate the determinant of the exact inverse of the Hilbert matrix, A, using `invhilb`. Compare the result to `d1` to find the relative error in `d1`.

```
d = det(invhilb(10));
relError = abs(d1-d)/abs(d)
```

```
relError = 1.1462e-04
```

The relative error in `d1` is reasonably small. Avoiding the explicit computation of the inverse of A minimizes it.

For comparison, also calculate the determinant of the inverse of A by explicitly calculating the inverse. Compare the result to `d` to see the relative error.

```
d2 = det(inv(A));
relError2 = abs(d2-d)/abs(d)
```

```
relError2 = 2.2824e-05
```

The relative error in the calculation of `d2` is many orders of magnitude larger than that of `d1`.

Find Determinant of Singular Matrix

Examine a matrix that is exactly singular, but which has a large nonzero determinant. In theory, the determinant of any singular matrix is zero, but because of the nature of floating-point computation, this ideal is not always achievable.

Create a 13-by-13 diagonally dominant singular matrix, A.

```
A = diag([24 46 64 78 88 94 96 94 88 78 64 46 24]);
```

```
S = diag([-13 -24 -33 -40 -45 -48 -49 -48 -45 -40 -33 -24],1);
A = A + S + rot90(S,2)
```

```
A =

    24   -13     0     0     0     0     0     0     0     0     0     0     0
   -24    46   -24     0     0     0     0     0     0     0     0     0     0
     0   -33    64   -33     0     0     0     0     0     0     0     0     0
     0     0   -40    78   -40     0     0     0     0     0     0     0     0
     0     0     0   -45    88   -45     0     0     0     0     0     0     0
     0     0     0     0   -48    94   -48     0     0     0     0     0     0
     0     0     0     0     0   -49    96   -49     0     0     0     0     0
     0     0     0     0     0     0   -48    94   -48     0     0     0     0
     0     0     0     0     0     0     0   -45    88   -45     0     0     0
     0     0     0     0     0     0     0     0   -40    78   -40     0     0
```

A is singular because the rows are linearly dependent. For instance, `sum(A)` produces a vector of zeros.

Calculate the determinant of A.

```
d = det(A)
```

```
d = 1.0597e+05
```

The determinant of A is quite large despite the fact that A is singular. In fact, the determinant of A should be exactly zero! The inaccuracy of d is due to an aggregation of round-off errors in the MATLAB® implementation of the LU decomposition, which `det` uses to calculate the determinant. This result demonstrates a few important aspects of calculating numeric determinants. See the “Limitations” section for more details.

Input Arguments

A — Input matrix

square numeric matrix

Input matrix, specified as a square numeric matrix.

Data Types: `single` | `double`
Complex Number Support: Yes

Limitations

Avoid using `det` to examine if a matrix is singular because of the following limitations. Use `cond` or `rcond` instead.

Limitation	Result
The magnitude of the determinant is typically unrelated to the condition number of a matrix.	The determinant of a matrix can be arbitrarily large or small without changing the condition number.
`det` uses the LU decomposition to calculate the determinant, which is susceptible to floating-point round-off errors.	The determinant calculation is sometimes numerically unstable. For example, `det` can produce a large-magnitude determinant for a singular matrix, even though it should have a magnitude of 0.

Algorithms

`det` computes the determinant from the triangular factors obtained by Gaussian elimination with the `lu` function.

```
[L,U] = lu(X)
s =  det(L)      % This is always +1 or -1
det(X) = s*prod(diag(U))
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cond` | `condest` | `inv` | `lu` | `mldivide` | `rcond` | `rref`

Topics

"Inverses and Determinants"

Introduced before R2006a

details

Display array details

Syntax

```
details(A)
```

Description

`details(A)` displays detailed information about the array, `A`.

When `A` is a MATLAB object array, `details` displays more information than the default display. This information includes:

- Fully qualified class name, including package names
- Link to class documentation
- Link to `handle` class documentation for classes that subclass `handle`
- List of all properties that have public get access
- List of property values if the array is scalar
- Link to list of public methods
- Link to list of events
- Link to list of all nonhidden superclasses

Examples

Display Object Details

Display object details for a class that overloads its own object display. The `details` function never calls overloaded display methods. Therefore, you can use this function to obtain information about the object array in all cases.

Suppose `PolyNom` is a class that provides a specialized default display for polynomials. Use `details` to display information about the object.

Create an object using the polynomial coefficients:

```
pn = PolyNom([1,2,3,0,4])
```

The overloaded `disp` method displays the code for evaluating the polynomial:

```
pn =

x^4 + 2*x^3 + 3*x^2 + 4
```

Calling the `details` function provides information about the object:

```
details(pn)

 PolyNom with properties:

    coef: [1 2 3 0 4]

  Methods
```

Input Arguments

A — Input array

scalar or nonscalar array of any type

Input array, specified as a scalar or nonscalar array of any type. The `details` function displays detailed information about this array.

See Also

See Also

`classdef` | `disp` | `display`

Introduced in R2013b

detectImportOptions

Create import options based on file content

Syntax

```
opts = detectImportOptions(filename)
opts = detectImportOptions(filename,Name,Value)
```

Description

`opts = detectImportOptions(filename)` locates a table in a file and returns the import options for importing the table. You can modify the options object and use it with `readtable` to control how MATLAB imports tabular data. The type of the options returned depends on the file extension. For example, the function returns a `SpreadsheetImportOptions` object if `filename` is a spreadsheet file. However, the function returns a `DelimitedTextImportOptions` or `FixedWidthImportOptions` object if `filename` is a text file.

`opts = detectImportOptions(filename,Name,Value)` locates a table in a file with the help of additional parameters specified by one or more `Name,Value` pair arguments.

Examples

Create and Use Import Options for Spreadsheet Files

Create import options for a spreadsheet file, specify the variables to import, and then read the data.

Create an import options object from a file.

```
opts = detectImportOptions('patients.xls')
```

```
opts = 
  SpreadsheetImportOptions with properties:

   Sheet Properties:
```

```
                        Sheet: ''

   Replacement Properties:
                  MissingRule: 'fill'
              ImportErrorRule: 'fill'

   Variable Import Properties:  Set types by name using setvartype
                VariableNames: {'LastName', 'Gender', 'Age' ... and 7 more}
                VariableTypes: {'char', 'char', 'double' ... and 7 more}
        SelectedVariableNames: {'LastName', 'Gender', 'Age' ... and 7 more}
              VariableOptions: Show all 10 VariableOptions
 Access VariableOptions sub-properties using setvaropts/getvaropts

   Range Properties:
                    DataRange: 'A2' (Start Cell)
           VariableNamesRange: 'A1'
                RowNamesRange: ''
           VariableUnitsRange: ''
    VariableDescriptionsRange: ''
```

Modify the options object to specify which variables to import.

```
opts.SelectedVariableNames = {'Systolic','Diastolic'};
```

Use `readtable` along with the options object to import the specified variables.

```
T = readtable('patients.xls',opts);
summary(T)
```

```
Variables:

    Systolic: 100×1 double

        Values:

            Min       109
            Median    122
            Max       138

    Diastolic: 100×1 double

        Values:

            Min         68
```

```
            Median    81.5
            Max         99
```

Create and Use Import Options for Text Files

Create import options, tailor the data types for multiple variables, and then read the data.

Create an import options object from a text file.

```
opts = detectImportOptions('airlinesmall.csv')
```

```
opts 
  DelimitedTextImportOptions with properties:

   Format Properties:
                   Delimiter: {','}
                  Whitespace: '\b\t '
                  LineEnding: {'\n'  '\r'  '\r\n'}
                CommentStyle: {}
    ConsecutiveDelimitersRule: 'split'
        LeadingDelimitersRule: 'keep'
                EmptyLineRule: 'skip'
                     Encoding: 'windows-1252'

   Replacement Properties:
                 MissingRule: 'fill'
              ImportErrorRule: 'fill'
             ExtraColumnsRule: 'addvars'

   Variable Import Properties:  Set types by name using setvartype
                VariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
                VariableTypes: {'double', 'double', 'double' ... and 26 more}
        SelectedVariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
              VariableOptions: Show all 29 VariableOptions
 Access VariableOptions sub-properties using setvaropts/getvaropts

   Location Properties:
                     DataLine: 2
            VariableNamesLine: 1
               RowNamesColumn: 0
            VariableUnitsLine: 0
      VariableDescriptionsLine: 0
```

Examine the `Type` property of variables `TaxiIn` and `TaxiOut`.

```
getvaropts(opts,{'TaxiIn','TaxiOut'})
```

```
ans = 
  1×2 TextVariableImportOptions array with properties:

    WhitespaceRule
    Type
    FillValue
    Name
    QuoteRule
    TreatAsMissing
```

Change the type of the variables `TaxiIn` and `TaxiOut` to `double`.

```
 opts = setvartype(opts,{'TaxiIn','TaxiOut'},'double');
```

Specify the subset of variables to import and examine.

```
opts.SelectedVariableNames = {'TaxiIn','TaxiOut'};
```

Use the `readtable` function along with the options object to import the selected variables. Display a summary of the table.

```
T = readtable('airlinesmall.csv',opts);
summary(T)
```

```
Variables:

    TaxiIn: 123523×1 double

        Values:

            Min             0
            Median          5
            Max             1451
            NumMissing      37383

    TaxiOut: 123523×1 double

        Values:

            Min             0
```

```
            Median          13
            Max             755
            NumMissing      37364
```

Designate Data Type for Imported Text Data

Import text data as a string data type by specifying import options.

Create an options object for the file.

```
opts = detectImportOptions('outages.csv');
```

Specify which variables to import using `readtable`, and then show a summary. The data type of the selected variables is `char`.

```
opts.SelectedVariableNames = {'Region','Cause'};
T = readtable('outages.csv',opts);
summary(T)
```

```
Variables:

    Region: 1468×1 cell array of character vectors

    Cause: 1468×1 cell array of character vectors
```

Import text data as a `string` data type, and then create import options by specifying the `TextType` name-value pair.

```
opts = detectImportOptions('outages.csv','TextType','string');
```

Specify which variables to import using `readtable`, and then show a summary. The data type of the selected variables is now `string`.

```
opts.SelectedVariableNames = {'Region','Cause'};
T = readtable('outages.csv',opts);
summary(T)
```

```
Variables:

    Region: 1468×1 string

    Cause: 1468×1 string
```

- "Define Import Options for Tables"

Input Arguments

`filename` — Name of file to read

character vector

Name of the file to read, specified as a character vector. If `filename` includes the file extension, then `detectImportOptions` determines the file format from the extension. Otherwise, you must specify the `'FileType'` name-value pair to indicate the type of file.

The `detectImportOptions` function supports these file extensions: `.txt`, `.dat`, `.csv`, `.xls`, `.xlsb`, `.xlsm`, `.xlsx`, `.xltm`, `.xltx`, and `.ods`.

Note: File extensions `.xlsb` and `.ods` are only supported on platforms with Excel for Windows.

Example: `'myFile.xlsx'`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'FileType','text'`

Parameters

`'FileType'` — Type of file

`'text'` | `'spreadsheet'`

Type of file, specified as the comma-separated pair consisting of `'FileType'` and either `'text'` or `'spreadsheet'`.

Specify the `'FileType'` name-value pair argument when the `filename` does not include the file extension or if the extension is other than one of these:

- `.txt`, `.dat`, or `.csv` for delimited text files
- `.xls`, `.xlsb`, `.xlsm`, `.xlsx`, `.xltm`, `.xltx`, or `.ods` for spreadsheet files

Note: File extensions `.xlsb` and `.ods` are only supported on platforms with Excel for Windows.

Example: `'FileType','text'`

`'TextType'` — Type for imported text data

`'char'` (default) | `'string'`

Type for imported text data, specified as the comma-separated pair consisting of `'TextType'` and either `'char'` or `'string'`.

- `'char'` — Import text data into MATLAB as character vectors.
- `'string'` — Import text data into MATLAB as string arrays.

Example: `'TextType','char'`

`'DatetimeType'` — Type for imported date and time data

`'datetime'` (default) | `'text'` | `'exceldatenum'` (spreadsheet files only)

Type for imported date and time data, specified as the comma-separated pair consisting of `'DatetimeType'` and one of the following: `'datetime'`, `'text'`, or `'exceldatenum'`. The value `'exceldatenum'` is only applicable for spreadsheet files, and is not allowed for text files.

Value	Type for Date and Time Data
`'datetime'`	MATLAB `datetime` data type For more information, see `datetime`.
`'text'`	Cell array of character vectors
`'exceldatenum'`	Excel serial date numbers A serial date number is a single number equal to the number of days from a given reference date. Excel serial date numbers use a different reference date than MATLAB serial date numbers. For more information on Excel dates, see https://support.microsoft.com/en-us/kb/214330.

Example: `'DatetimeType','text'`

`'NumVariables'` — Expected number of variables

positive integer

Expected number of variables, specified as the comma-separated pair consisting of `'NumVariables'` and a positive integer. If unspecified, the importing function automatically detects the number of variables.

Example: `'NumVariables',10`

Data Types: `single` | `double`

`'NumHeaderLines'` — Number of header lines

positive integer

Number of header lines in the file, specified as the comma-separated pair consisting of `'NumHeaderLines'` and a positive integer. If unspecified, the importing function automatically detects the number of header lines in the file.

Example: `'NumHeaderLines',7`

Data Types: `single` | `double`

Parameters for Spreadsheet Files Only

`'Sheet'` — Sheet to read from

`''` empty character array (default) | character vector | positive scalar integer

Sheet to read from, specified as an empty character array, a character vector containing the sheet name, or a positive scalar integer denoting the sheet index. Based on the value specified for the `Sheet` property, the import function behaves as described in the table.

Specification	Behavior
`''` (default)	Import data from the first sheet.
name	Import data from the matching sheet name, regardless of order of sheets in the spreadsheet file.
integer	Import data from sheet in the position denoted by the integer, regardless of the sheet names in the spreadsheet file.

Example: `'Sheet7'`

Example: `7`

Data Types: `char` | `single` | `double`

`'Range'` — Portion of worksheet to read
character vector

Portion of the worksheet to read, indicated as a rectangular area specified by a comma separated pair consisting of `'Range'` and a character vector in one of these forms.

Ways to specify `Range`	Description
`'Corner1:Corner2'` Rectangular Range	Specify the range using the syntax `'Corner1:Corner2'`, where `Corner1` and `Corner2` are two opposing corners that define the region. For example, `'D2:H4'` represents the 3-by-5 rectangular region between the two corners `D2` and `H4` on the worksheet. The `'Range'` name-value pair argument is not case-sensitive, and uses Excel A1 reference style (see Excel help). **Example:** `'Range','Corner1:Corner2'`
`''` Unspecified or Empty	If unspecified, the importing function automatically detects the used range. **Example:** `'Range',''` **Note:** *Used Range* refers to the rectangular portion of the spreadsheet that actually contains data. The importing function automatically detects the used range by trimming any leading and trailing rows and columns that do not contain data. Text that is only white space is considered data and is captured within the used range.
`'Row1:Row2'` Row Range	You can identify the range by specifying the beginning and ending rows using Excel row designators. Then `readtable` automatically detects the used column range within the designated rows. For instance, the importing function interprets the range specification `'1:7'` as an instruction to read all columns in the used range in rows 1 through 7 (inclusive). **Example:** `'Range','1:7'`

Ways to specify `Range`	Description
`'Column1:Column2'` Column Range	You can identify the range by specifying the beginning and ending columns using Excel column designators. Then `readtable` automatically detects the used row range within the designated columns. For instance, the importing function interprets the range specification `'A:F'` as an instruction to read all rows in the used range in columns A through F (inclusive). **Example:** `'Range','A:F'`
`'NamedRange'` Excel's Named Range	In Excel, you can create names to identify ranges in the spreadsheet. For instance, you can select a rectangular portion of the spreadsheet and call it `'myTable'`. If such named ranges exist in a spreadsheet, then the importing function can read that range using its name. **Example:** `'Range','myTable'`

Parameters for Text Files Only

`'Delimiter'` — Field delimiter characters

character vector | cell array of character vectors

Field delimiter characters, specified as a character vector or a cell array of character vectors.

Example: `'|'`

Example: `{';','*'}`

Data Types: `char` | `cell`

`'Whitespace'` — Characters to treat as white space

character vector

Characters to treat as white space, specified as a character vector of one or more characters.

Example: `' _'`

Example: `'?!.,'`

`'LineEnding'` — End-of-line characters

`{'\n','\r','\r\n'}` (default) | character vector | cell array of character vectors

End-of-line characters, specified as a character vector of one or more characters or a cell array of character vectors.

Example: `'\n'`

Example: `'\r\n'`

Example: `{'\b',':'}`

Data Types: `char` | `cell`

`'Encoding'` — Character encoding scheme

`'UTF-8'` | `'ISO-8859-1'` | `'windows-1251'` | `'windows-1252'` | ...

Character encoding scheme associated with the file, specified as the comma-separated pair consisting of `'Encoding'` and `'system'` or a standard character encoding scheme name like one of the values in this table.

'Big5'	'ISO-8859-1'	'windows-847'
'Big5-HKSCS'	'ISO-8859-2'	'windows-949'
'CP949'	'ISO-8859-3'	'windows-1250'
'EUC-KR'	'ISO-8859-4'	'windows-1251'
'EUC-JP'	'ISO-8859-5'	'windows-1252'
'EUC-TW'	'ISO-8859-6'	'windows-1253'
'GB18030'	'ISO-8859-7'	'windows-1254'
'GB2312'	'ISO-8859-8'	'windows-1255'
'GBK'	'ISO-8859-9'	'windows-1256'
'IBM866'	'ISO-8859-11'	'windows-1257'
'KOI8-R'	'ISO-8859-13'	'windows-1258'
'KOI8-U'	'ISO-8859-15'	'US-ASCII'
	'Macintosh'	'UTF-8'
	'Shift_JIS'	

Example: `'system'` uses the system default encoding.

`'CommentStyle'` — Style of comments

character vector | cell array of character vectors

Style of comments, specified as a character vector or cell array of character vectors.

For example, specify `CommentStyle` as `'%'` to ignore the text following a percent sign on the same line.

Example: `{'/*'}`

Data Types: `char` | `cell`

Output Arguments

`opts` — Import options for file

`SpreadsheetImportOptions` | `DelimitedtextImportOptions` | `FixedWidthImportOptions`

Import options for the specified file, returned as a `SpreadsheetImportOptions` object or a `DelimitedTextImportOptions` object. The type of options object depends on the type of file specified. For text files (`.txt`, `.dat`, or `.csv`), the `detectImportOptions` function returns a `DelimitedTextImportOptions` or `FixedWidthImportOptions` object. For spreadsheet files (`.xls`, `.xlsb`, `.xlsm`, `.xlsx`, `.xltm`, `.xltx`, or `.ods`), the `detectImportOptions` function returns a `SpreadsheetImportOptions` object.

Based on the contents of the specified file, the `detectImportOptions` function automatically detects and sets these parameters.

For Spreadsheet Files	For Text Files
`VariableNames` (if any)	`VariableNames` (if any)
`VariableTypes`	`VariableTypes`
`DataRange`	`DataLine`
`VariableNamesRange`	`VariableNamesLine`
	`Delimiter`
	`LeadingDelimitersRule` (if space is delimiter)
	`ConsecutiveDelimitersRule` (if space is delimiter)

For Spreadsheet Files	For Text Files
	`PartialFieldRule` (for fixed-width files)

See Also

See Also

`DelimitedTextImportOptions` | `FixedWidthImportOptions` | `readtable` | `SpreadsheetImportOptions`

Topics

"Define Import Options for Tables"

Introduced in R2016b

detrend

Remove linear trends

Syntax

```
y = detrend(x)
y = detrend(x,'constant')
y = detrend(x,'linear',bp)
```

Description

`detrend` removes the mean value or linear trend from a vector or matrix, usually for FFT processing.

`y = detrend(x)` removes the best straight-line fit from vector `x` and returns it in `y`. If `x` is a matrix, `detrend` removes the trend from each column.

`y = detrend(x,'constant')` removes the mean value from vector `x` or, if `x` is a matrix, from each column of the matrix.

`y = detrend(x,'linear',bp)` removes a continuous, piecewise linear trend from vector `x` or, if `x` is a matrix, from each column of the matrix. Vector `bp` contains the indices of the breakpoints between adjacent linear segments. The breakpoint between two segments is defined as the data point that the two segments share.

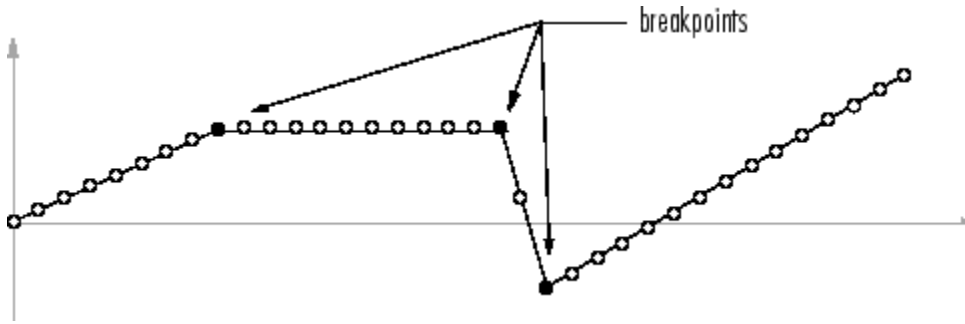

`detrend(x,'linear')`, with no breakpoint vector specified, is the same as `detrend(x)`.

Examples

```
sig = [0 1 -2 1 0 1 -2 1 0];      % signal with no linear trend
trend = [0 1 2 3 4 3 2 1 0];      % two-segment linear trend
x = sig+trend;                    % signal with added trend
y = detrend(x,'linear',5)         % breakpoint at 5th element

y =

   -0.0000
    1.0000
   -2.0000
    1.0000
    0.0000
    1.0000
   -2.0000
    1.0000
   -0.0000
```

Note that the breakpoint is specified to be the fifth element, which is the data point shared by the two segments.

Algorithms

`detrend` computes the least-squares fit of a straight line (or composite line for piecewise linear trends) to the data and subtracts the resulting function from the data. To obtain the equation of the straight-line fit, use `polyfit`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If supplied and not empty, the input argument `bp` must satisfy the following requirements:
  - Be real.
  - Be sorted in ascending order.
  - Restrict elements to integers in the interval `[1, n-2]`. `n` is the number of elements in a column of input argument `X` , or the number of elements in `X` when `X` is a row vector.
  - Contain all unique values.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

`polyfit`

Introduced before R2006a

deval

Evaluate differential equation solution structure

Syntax

```
y = deval(sol,x)
y = deval(x,sol)
y = deval( ___ ,idx)
[y,yp] = deval( ___ )
```

Description

`y = deval(sol,x)` and `y = deval(x,sol)` evaluate the solution `sol` of a differential equation problem at the points contained in `x`.

`y = deval( ___ ,idx)` returns only the solution components with indices listed in the vector `idx`. You can use either of the previously listed input argument combinations.

`[y,yp] = deval( ___ )` also returns `yp`, which is the first derivative of the numeric solution produced by the solver.

Examples

Evaluate DDE with Constant Delays

This example solves the DDE equation `y' = ddex1de(t,y,Z)` using `dde23`, then plots the solution.

Solve the system using `dde23`.

```
sol = dde23(@ddex1de, [1 0.2], @ddex1hist, [0 5]);
```

Evaluate the solution at 100 points in the interval `[0 5]`.

```
x = linspace(0,5);
y = deval(sol,x);
```

Plot the solution.

```
plot(x,y)
```

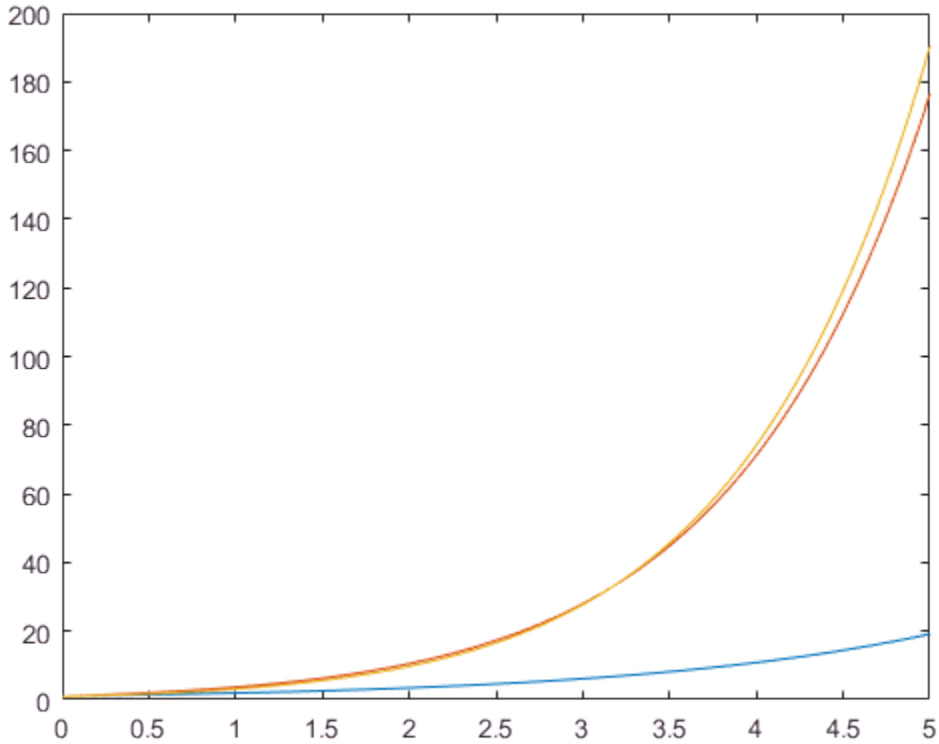

Evaluate van der Pol Equation

This example solves the system `y' = vdp1(t,y)` using `ode45`, then plots the first component of the solution.

Solve the system using `ode45`.

```
sol = ode45(@vdp1, [0 20], [2 0]);
```

Evaluate the first component of the solution at 100 points in the interval `[0 20]`.

```
x = linspace(0,20,100);
y = deval(sol,x,1);
```

Plot the solution.

```
plot(x,y)
```

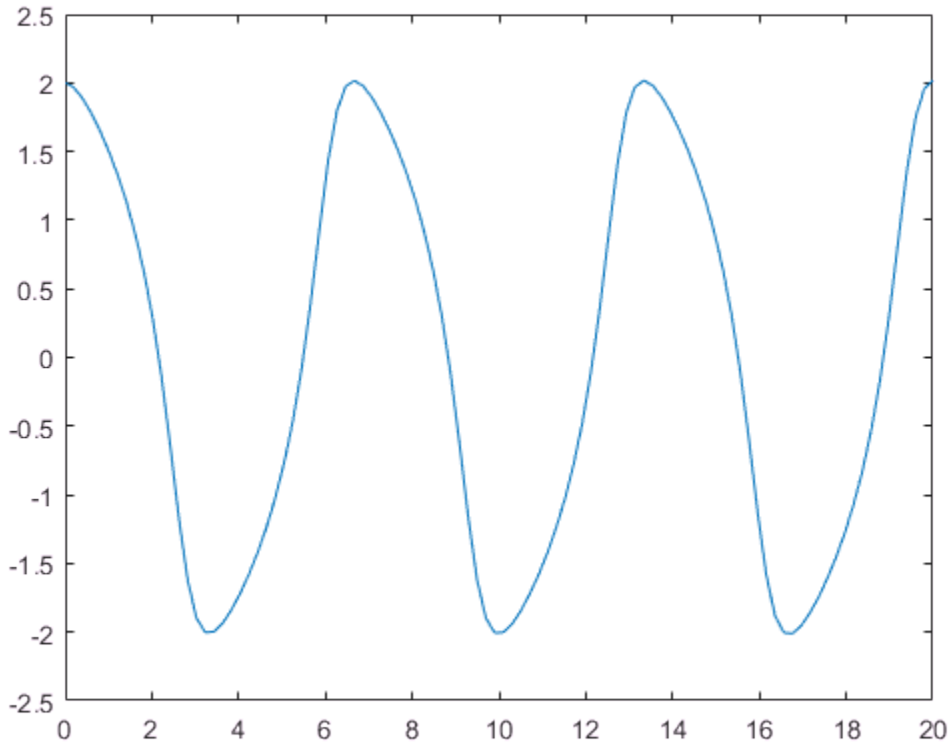

Slope of Interpolating Function

Solve the simple ODE `y' = t^2` with initial condition `y0 = 0` in the interval $[0, 3]$ using `ode23`.

```
sol = ode23(@(t,y) t^2, [0 3], 0);
```

Evaluate the solution at seven points. The solution structure `sol` contains an interpolating function that `deval` uses to produce a continuous solution at these points.

Specify a second output argument with `deval` to also return the derivative of the interpolating function at the specified points.

```
x = linspace(0,3,7);
[y,yp] = deval(sol,x)
```

```
y =

         0    0.0417    0.3333    1.1250    2.6667    5.2083    9.0000


yp =

         0    0.2500    1.0000    2.2500    4.0000    6.2500    9.0000
```

Input Arguments

`sol` — Solution structure

structure

Solution structure, specified as a structure returned by one of these differential equation solvers.

- Initial value problem solver — `ode45`, `ode23`, `ode113`, `ode15s`, `ode23s`, `ode23t`, `ode23tb`, `ode15i`
- Delay differential equations solver — `dde23`, `ddesd`, or `ddensd`
- Boundary value problem solver — `bvp4c` or `bvp5c`

Example: `sol = ode45(@myode,tspan,y0)`

Data Types: `struct`

`x` — Evaluation points

vector

Evaluation points, specified as a vector. `x` specifies the points at which you want the value of the solution. The elements of `x` must be contained in the original integration interval, `[sol.x(1) sol.x(end)]`. For each index `i`, the solution `y(:,i)` corresponds to `x(i)`.

Example: `0:0.1:1`

Example: `[2 3 5 8]`

Data Types: `single` | `double`

`idx` — Solution components to return
vector

Solution components to return, specified as a vector. Use this input when you are only interested in certain components of the solution.

Example: `y = deval(sol,x,[2 3])` returns only the second and third solution components.

Data Types: `single` | `double`

Output Arguments

`y` — Interpolated solution
vector | matrix

Interpolated solution, returned as a vector or matrix. The number of rows in `y` is equal to the number of solution components being returned.

For multipoint boundary value problems, the solution obtained by `bvp4c` or `bvp5c` might be discontinuous at the interfaces. For an interface point `xc`, the `deval` function returns the average of the limits from the left and right of `xc`. To get the limit values, set the value of `x` to be slightly larger or smaller than `xc`.

`yp` — Derivative of continuous solution produced by `sol`
vector | matrix

Derivative of continuous solution produced by `sol`, returned as a vector or matrix. `yp` is the same size as `y` and indicates the slope of the interpolating function used by `sol` at each solution point in `y`.

See Also

See Also
`bvp4c` | `bvp5c` | `dde23` | `ddensd` | `ddesd` | `ode113` | `ode15i` | `ode15s` | `ode23` | `ode23s` | `ode23t` | `ode23tb` | `ode45`

Introduced before R2006a

diag

Create diagonal matrix or get diagonal elements of matrix

Syntax

```
D = diag(v)
D = diag(v,k)

x = diag(A)
x = diag(A,k)
```

Description

`D = diag(v)` returns a square diagonal matrix with the elements of vector `v` on the main diagonal.

`D = diag(v,k)` places the elements of vector `v` on the `k`th diagonal. `k=0` represents the main diagonal, `k>0` is above the main diagonal, and `k<0` is below the main diagonal.

`x = diag(A)` returns a column vector of the main diagonal elements of `A`.

`x = diag(A,k)` returns a column vector of the elements on the `k`th diagonal of `A`.

Examples

Create Diagonal Matrices

Create a 1-by-5 vector.

```
v = [2 1 -1 -2 -5];
```

Use `diag` to create a matrix with the elements of `v` on the main diagonal.

```
D = diag(v)
```

```
D =
```

```
     2     0     0     0     0
     0     1     0     0     0
     0     0    -1     0     0
     0     0     0    -2     0
     0     0     0     0    -5
```

Create a matrix with the elements of `v` on the first super diagonal (`k=1`).

```
D1 = diag(v,1)
```

```
D1 =

     0     2     0     0     0     0
     0     0     1     0     0     0
     0     0     0    -1     0     0
     0     0     0     0    -2     0
     0     0     0     0     0    -5
     0     0     0     0     0     0
```

The result is a 6-by-6 matrix. When you specify a vector of length `n` as an input, `diag` returns a square matrix of size `n+abs(k)`.

Get Diagonal Elements

Get the elements on the main diagonal of a random 6-by-6 matrix.

```
A = randi(10,6)
```

```
A =

     9     3    10     8     7     8
    10     6     5    10     8     1
     2    10     9     7     8     3
    10    10     2     1     4     1
     7     2     5     9     7     1
     1    10    10    10     2     9
```

```
x = diag(A)
```

```
x =
```

```
     9
     6
     9
     1
     7
     9
```

Get the elements on the first subdiagonal (`k=-1`) of `A`. The result has one fewer element than the main diagonal.

```
x1 = diag(A,-1)
```

```
x1 =

    10
    10
     2
     9
     2
```

Calling `diag` twice returns a diagonal matrix composed of the diagonal elements of the original matrix.

```
A1 = diag(diag(A))
```

```
A1 =

     9     0     0     0     0     0
     0     6     0     0     0     0
     0     0     9     0     0     0
     0     0     0     1     0     0
     0     0     0     0     7     0
     0     0     0     0     0     9
```

Input Arguments

v — Diagonal elements

vector

Diagonal elements, specified as a vector. If `v` is a vector with `N` elements, then `diag(v,k)` is a square matrix of order `N+abs(k)`.

`diag([])` returns an empty matrix, `[]`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

A — Input matrix
matrix

Input matrix. `diag` returns an error if `ndims(A) > 2`.

`diag([])` returns an empty matrix, `[]`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

k — Diagonal number
integer

Diagonal number, specified as an integer. `k=0` represents the main diagonal, `k>0` is above the main diagonal, and `k<0` is below the main diagonal.

For an m-by-n matrix, `k` is in the range $(-m+1) \le k \le (n-1)$.

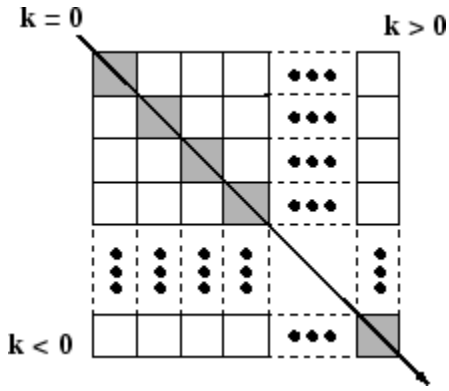

Tips

- The `trace` of a matrix is equal to `sum(diag(A))`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you supply `k`, then it must be a real and scalar integer value.
- For variable-size inputs that are variable-length vectors (1-by-: or :-by-1), `diag`:
  - Treats the input as a vector input
  - Returns a matrix with the given vector along the specified diagonal
- For variable-size inputs that are not variable-length vectors, `diag`:
  - Treats the input as a matrix
  - Does not support inputs that are vectors at run time
  - Returns a variable-length vector

  If the input is variable-size (:m-by-:n) and has shape 0-by-0 at run time, then the output is 0-by-1 not 0-by-0. However, if the input is a constant size 0-by-0, then the output is `[]`.
- For variable-size inputs that are not variable-length vectors (1-by-: or :-by-1), `diag` treats the input as a matrix from which to extract a diagonal vector. This behavior occurs even if the input array is a vector at run time. To force `diag` to build a matrix from variable-size inputs that are not 1-by-: or :-by-1, use:
  - `diag(x(:))` instead of `diag(x)`
  - `diag(x(:),k)` instead of `diag(x,k)`
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`blkdiag` | `isdiag` | `istril` | `istriu` | `spdiags` | `tril` | `triu`

Introduced before R2006a

matlab.unittest.diagnostics

Summary of classes in MATLAB Diagnostics Interface

Description

Use diagnostics to communicate relevant information in the event of a failure. To add a diagnostic message to a test case, use the `diagnostic` argument in any of the `matlab.unittest.qualifications` methods. The framework also displays diagnostic messages related to the nature of the qualification failure. The `matlab.unittest.diagnostics` package consists of the following classes:

matlab.unittest.diagnostics.ConstraintDiagnostic	Diagnostics specific to `matlab.unittest` constraints
matlab.unittest.diagnostics.Diagnostic	Fundamental interface class for `matlab.unittest` diagnostics
matlab.unittest.diagnostics.DiagnosticResult	Result of a diagnosed `Diagnostic` instance
matlab.unittest.diagnostics.DisplayDiagnostic	Diagnostic using a value's displayed output
matlab.unittest.diagnostics.FigureDiagnostic	Diagnostic to save specified figure
matlab.unittest.diagnostics.FileArtifact	Artifact associated with a file on disk
matlab.unittest.diagnostics.FunctionHandleDiagnostic	Diagnostic using a function's displayed output
matlab.unittest.diagnostics.ScreenshotDiagnostic	Diagnostic to capture screen as image file
matlab.unittest.diagnostics.StringDiagnostic	Diagnostic using string

The package contains the following event data classes:

matlab.unittest.diagnostics.LoggedDiagnosticEventData	Event data for DiagnosticLogged event listeners

matlab.unittest.diagnostics.ConstraintDiagnostic class

Package: matlab.unittest.diagnostics
Superclasses: matlab.unittest.diagnostics.Diagnostic

Diagnostics specific to `matlab.unittest` constraints

Description

The `ConstraintDiagnostic` class provides various textual fields that are common to most constraints. These fields may be turned on or off depending on their applicability.

The `ConstraintDiagnostic` class is a helper class for displaying diagnostics when using constraints. The `ConstraintDiagnostic` class provides custom constraint authors a way to add a common look and feel to diagnostics produced by the `getDiagnosticFor` method of constraints.

Constraint diagnostics are displayed in the following order: Description, Conditions, Actual Value, and Expected Value.

Properties

`ActVal`

The actual value passed to the constraint for testing.

`ActValHeader`

Header information for the actual value property, `ActVal`, specified as a character vector. The default header is `'Actual Value:'`.

`Conditions`

Formatted list of conditions, specified as a single character vector. Each condition starts on a new line and begins with an arrow (`-->`) delimiter. Conditions are added to the list using the `addCondition` and `addConditionsFrom` methods.

`ConditionsCount`

Number of conditions in the condition list. This is a read-only property generated from the conditions list. The conditions list is defined in the `Conditions` property.

Description

General diagnostic information, specified as a character vector.

DisplayActVal

Indicator whether to display the actual value property, `ActVal`, specified as a boolean. By default, the actual value is not displayed and the value of this property is `false`.

DisplayConditions

Indicator of whether to display the `Conditions` property, specified as a boolean. By default, the conditions are not displayed and the value of this property is `false`. Even if `DisplayConditions` is set to `true`, if there are no conditions on the conditions list, neither the conditions header or the conditions list are displayed.

DisplayDescription

Indicator of whether to display the `Description` property, specified as a boolean. By default, the description is not displayed and the value of this property is `false`.

DisplayExpVal

Indicator whether to display the expected value property, `ExpVal`, specified as a boolean. By default, the expected value is not displayed and the value of this property is `false`.

ExpVal

If applicable, the expected value. This property can be turned off if the associated constraint does not contain an expected value.

ExpValHeader

Header information for the expected value property, `ExpVal`, specified as a character vector. The default header is `'Expected Value:'`.

Inherited Properties

Artifacts

The artifacts produced during the last diagnostic evaluation, returned as an array of `FileArtifact` instances.

DiagnosticText

The `DiagnosticText` property provides the means by which the actual diagnostic information is communicated to consumers of diagnostics, such as testing frameworks. The property is a character vector that is defined during evaluation of the `diagnose` method.

Methods

addCondition	Add condition to condition list
addConditionsFrom	Add condition from another `ConstraintDiagnostic` to condition list
getDisplayableString	Convert object to string for display
getPreDescriptionString	Returns text to be displayed prior to description
getPostDescriptionString	Returns text to be displayed following description
getPostConditionString	Returns text to be displayed following conditions list
getPostActValString	Returns text to be displayed following actual value
getPostExpValString	Returns text to be displayed following expected value

Inherited Methods

diagnose	Execute diagnostic action
join	Join multiple diagnostics into a single array

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

Diagnostic | `matlab.unittest.constraints` | `matlab.unittest.diagnostics`

addCondition

Class: matlab.unittest.diagnostics.ConstraintDiagnostic
Package: matlab.unittest.diagnostics

Add condition to condition list

Syntax

```
addCondition(diag, cond)
```

Description

`addCondition(diag, cond)` adds the condition, `cond`, to the condition list. Add conditions to the condition list one at a time. When the condition list is displayed, each condition is preceded by an arrow (`-->`) delimiter and indented.

Input Arguments

`cond`

Condition, specified as a character vector containing information specific to the cause of the constraint failure or another `Diagnostic` instance, which acts as a "subdiagnostic".

`diag`

`matlab.unittest.diagnostics.Diagnostic` instance.

See Also

See Also

addConditionsFrom

addConditionsFrom

Class: matlab.unittest.diagnostics.ConstraintDiagnostic
Package: matlab.unittest.diagnostics

Add condition from another `ConstraintDiagnostic` to condition list

Syntax

```
addConditionsFrom(constDiag, otherConstDiag)
```

Description

`addConditionsFrom(constDiag, otherConstDiag)` adds the conditions from the `ConstraintDiagnostic` instance, `constDiag`, to the condition list in the `Diagnostic` instance, `diag`. This is useful when a constraints composes another constraint, and needs to use the conditions produced in the diagnostics of the composed constraint.

Input Arguments

`constDiag`

Diagnostic to add conditions to, specified as a `matlab.unittest.diagnostics.ConstraintDiagnostic` instance

`otherConstDiag`

Diagnostic to add conditions from, specified as a `matlab.unittest.diagnostics.ConstraintDiagnostic` instance

Examples

Add Conditions from a Constraint

```
% This demonstrates a constraint that composes another constraint
```

```
% and uses the addConditionsFrom method to utilize the conditions
% from the composed ConstraintDiagnostic.
classdef IsDouble < matlab.unittest.constraints.Constraint

    properties(Constant, GetAccess=private)
        DoubConst = matlab.unittest.constraints.IsInstanceOf(?double);
    end

    methods
        function tf = satisfiedBy(constraint, actual)
            tf = constraint.DoubConst.satisfiedBy(actual);
        end
        function diag = getDiagnosticFor(constraint, actual)
            diag = ConstraintDiagnostic;

            % Now add conditions from the IsInstanceOf
            % Diagnostic
            otherDiag = constraint.DoubConst.getDiagnosticFor(actual);
            diag.addConditionsFrom(otherDiag)

            % ...
        end
    end
end
```

See Also

See Also

addCondition

matlab.unittest.diagnostics.ConstraintDiagnostic.getDisplaya

Class: matlab.unittest.diagnostics.ConstraintDiagnostic
Package: matlab.unittest.diagnostics

Convert object to string for display

Syntax

```
str =
matlab.unittest.diagnostics.ConstraintDiagnostic.getDisplayableString(
value)
```

Description

`str = matlab.unittest.diagnostics.ConstraintDiagnostic.getDisplayableString(value)` converts the object, `obj` to a character vector, `str` for display in a diagnostic result. This conversion determines if hotlinks should be included in the character vector and truncates large numeric or cell arrays.

Input Arguments

`value`

Object of arbitrary class

See Also

getPreDescriptionString

Class: matlab.unittest.diagnostics.ConstraintDiagnostic
Package: matlab.unittest.diagnostics

Returns text to be displayed prior to description

Syntax

```
str = getPreDescriptionString(constDiag)
```

Description

`str = getPreDescriptionString(constDiag)` returns text to be displayed prior to the description. This method can be overridden to inject character vectors prior to displaying the `Description` property of the `ConstraintDiagnostic`. The location of this text is tied to the `Description` property. Its placement relative to other fields is not guaranteed.

Input Arguments

`constDiag`

`matlab.unittest.diagnostics.ConstraintDiagnostic` instance.

See Also

See Also

ConstraintDiagnostic | getPostActValString | getPostConditionString | getPostDescriptionString | getPostExpValString

getPostDescriptionString

Class: matlab.unittest.diagnostics.ConstraintDiagnostic
Package: matlab.unittest.diagnostics

Returns text to be displayed following description

Syntax

```
str = getPostDescriptionString(constDiag)
```

Description

`str = getPostDescriptionString(constDiag)` returns text to be displayed following the description. This method can be overridden to inject character vectors subsequent to displaying the `Description` property of the `ConstraintDiagnostic`. The location of this text is tied to the `Description` property. Its placement relative to other fields is not guaranteed.

Input Arguments

`constDiag`

`matlab.unittest.diagnostics.ConstraintDiagnostic` instance.

See Also

See Also

ConstraintDiagnostic | getPostActValString | getPostConditionString | getPostExpValString | getPreDescriptionString

getPostConditionString

Class: matlab.unittest.diagnostics.ConstraintDiagnostic
Package: matlab.unittest.diagnostics

Returns text to be displayed following conditions list

Syntax

```
str = getPostConditionsString(constDiag)
```

Description

`str = getPostConditionsString(constDiag)` returns text to be displayed following the conditions list. This method can be overridden to inject character vectors subsequent to displaying the `Conditions` property of the `ConstraintDiagnostic`. The location of this text is tied to the `Conditions` property. Its placement relative to other fields is not guaranteed.

Input Arguments

`constDiag`

`matlab.unittest.diagnostics.ConstraintDiagnostic` instance.

See Also

See Also

ConstraintDiagnostic | getPostActValString | getPostDescriptionString | getPostExpValString | getPreDescriptionString

getPostActValString

Class: matlab.unittest.diagnostics.ConstraintDiagnostic
Package: matlab.unittest.diagnostics

Returns text to be displayed following actual value

Syntax

```
str = getPostActualValString(constDiag)
```

Description

`str = getPostActualValString(constDiag)` returns text to be displayed following the actual value. This method can be overridden to inject character vectors subsequent to displaying the `ActVal` property of the `ConstraintDiagnostic`. The location of this text is tied to the `ActVal` property. Its placement relative to other fields is not guaranteed.

Input Arguments

`constDiag`

`matlab.unittest.diagnostics.ConstraintDiagnostic` instance.

See Also

See Also

ConstraintDiagnostic | getPostConditionString | getPostDescriptionString | getPostExpValString | getPreDescriptionString

getPostExpValString

Class: matlab.unittest.diagnostics.ConstraintDiagnostic
Package: matlab.unittest.diagnostics

Returns text to be displayed following expected value

Syntax

```
str = getPostExpValString(constDiag)
```

Description

`str = getPostExpValString(constDiag)` returns text to be displayed following the expected value. This method can be overridden to inject character vectors subsequent to displaying the `ExpVal` property of the `ConstraintDiagnostic`. The location of this text is tied to the `ExpVal` property. Its placement relative to other fields is not guaranteed.

Input Arguments

`constDiag`

`matlab.unittest.diagnostics.ConstraintDiagnostic` instance.

See Also

See Also

ConstraintDiagnostic | getPostActValString | getPostConditionString | getPostDescriptionString | getPreDescriptionString

matlab.unittest.diagnostics.Diagnostic class

Package: matlab.unittest.diagnostics

Fundamental interface class for `matlab.unittest` diagnostics

Description

The `Diagnostic` interface class is the means by which the `matlab.unittest` framework and its clients package diagnostic information. All diagnostics are derived from `Diagnostic`, whether they are user-supplied test diagnostics for an individual comparison or diagnostics associated with the `Constraint` used in the comparison.

Classes which derive from `Diagnostic` encode the diagnostic actions to be performed. They produce a diagnostic result that is displayed appropriately by the test running framework. In exchange for meeting this requirement, any `Diagnostic` implementation can be used directly with `matlab.unittest` qualifications. These qualifications execute the diagnostic action and store the result for the test running framework to use.

As a convenience, the framework creates appropriate diagnostic instances for arrays of character vectors, strings, and function handles when they are user supplied test diagnostics. To retain good performance, these values are only converted into `Diagnostic` instances when a qualification failure occurs or when the test running framework is explicitly observing passing qualifications. The default test runner does not explicitly observe passing qualifications.

Properties

`Artifacts`

The artifacts produced during the last diagnostic evaluation, returned as an array of artifacts.

`DiagnosticText`

The `DiagnosticText` property provides the means by which the actual diagnostic information is communicated to consumers of diagnostics, such as testing frameworks. The property is a character vector that is defined during evaluation of the `diagnose` method.

Methods

diagnose	Execute diagnostic action
join	Join multiple diagnostics into a single array

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Use Diagnostic Result

```
import matlab.unittest.constraints.IsEqualTo

% Create a TestCase for interactive use
testCase = matlab.unittest.TestCase.forInteractiveUse;

% Create StringDiagnostic upon failure
testCase.verifyThat(1, IsEqualTo(2), 'User supplied Diagnostic')

% Create FunctionHandleDiagnostic upon failure
testCase.verifyThat(1, IsEqualTo(2), @() system('ps'))

% Usage of user defined Diagnostic upon failure (see definition below)
testCase.verifyThat(1, IsEqualTo(2), ProcessStatusDiagnostic...
    ('Could not close my third party application!'))

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
% Diagnostic definition
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
classdef ProcessStatusDiagnostic < matlab.unittest.diagnostics.Diagnostic
    % ProcessStatusDiagnostic - an example diagnostic
    %
    %   Simple example to demonstrate how to create a custom
    %   diagnostic.

    properties
```

```
        % HeaderText - user-supplied header to display
        HeaderText = '(No header supplied)';
    end

    methods
        function diag = ProcessStatusDiagnostic(header)
            % Constructor - construct a ProcessStatusDiagnostic
            %
            %   The ProcessStatusDiagnostic constructor takes an
            %   optional header to be displayed along with process
            %   information.
            if (nargin >0)
                diag.HeaderText = header;
            end
        end

        function diagnose(diag)

            [status, processInfo] = system('ps');
            if (status ~= 0)
                processInfo = sprintf(...
                    ['!!! Could not obtain status diagnostic information!!!'...
                    ' [exit status code: %d]\n%s'], status, processInfo);
            end
            diag.DiagnosticResult = sprintf('%s\n%s', diag.HeaderText,...
                processInfo);
        end
    end

end % classdef
```

See Also

See Also

matlab.unittest.plugins.DiagnosticsValidationPlugin | matlab.unittest.constraints.Constraint | FunctionHandleDiagnostic | `matlab.unittest.diagnostics` | StringDiagnostic

Topics

"Types of Qualifications"

diagnose

Class: matlab.unittest.diagnostics.Diagnostic
Package: matlab.unittest.diagnostics

Execute diagnostic action

Syntax

```
diagnose(diag)
```

Description

`diagnose(diag)` executes diagnostic action for the `matlab.unittest.diagnostics.Diagnostic` instance, `diag`. The `diagnose` method is the means by which individual `Diagnostic` implementations can perform their respective diagnostic evaluations. Each concrete implementation is responsible for populating the `DiagnosticText` property of the `Diagnostic` object. Typically, text printed to the Command Window during diagnostic evaluation is not considered part of the diagnostic result and is ignored by the testing framework.

See Also

See Also

Diagnostic

join

Class: matlab.unittest.diagnostics.Diagnostic
Package: matlab.unittest.diagnostics

Join multiple diagnostics into a single array

Syntax

```
diagArray = join(diag1,...,diagN)
```

Description

`diagArray = join(diag1,...,diagN)` joins multiple diagnostics, specified by `diag1` through `diagN`, into a single array, `diagArray`.

Input Arguments

diag

Diagnostic content, specified as an instance of a `Diagnostic` object, a string array, a character array, a function handle, or an arbitrary type.

Output Arguments

diagArray

Array of joined diagnostic content.

- If `diagN` is an object that derives from `Diagnostic`, it is included in the array unmodified.
- If `diagN` is a `char` or a `string`, it is formed into a `StringDiagnostic` and included in the array.

- If `diagN` is a `function_handle`, it is formed into a `FunctionHandleDiagnostic` and included in the array.
- If `diagN` is any other type, it is formed into a `DisplayDiagnostic` and included in the array.

Examples

Join Diagnostic Content

```
% The following example creates a diagnostic array of length 4,
% demonstrating standard Diagnostic conversions. Note:
% MyCustomDiagnostic is for example purposes and is not executable
% code.

import matlab.unittest.diagnostics.Diagnostic
import matlab.unittest.constraints.IsTrue

arbitraryValue = 5;
testCase.verifyThat(false, IsTrue, ...
    Diagnostic.join(...
        'should have been true', ...
        @() system('ps'), ...
        arbitraryValue, ...
        MyCustomDiagnostic))
```

Alternatives

You can use array concatenation join diagnostics into an array if at least one of the values is a diagnostic. The `join` method prevents the need to have any `Diagnostics` in the array. Considering the following example.

```
arbitraryValue = 5;
testCase.verifyThat(false, IsTrue, ...
    ['should have been true', ...
    @() system('ps'), ...
    arbitraryValue, ...
    MyCustomDiagnostic]);
```

Since `MyCustomDiagnostic` is a `Diagnostic`, the other values are correctly converted to diagnostics as well.

See Also

See Also

matlab.mixin.Heterogeneous

matlab.unittest.diagnostics.DiagnosticResult class

Package: matlab.unittest.diagnostics

Result of a diagnosed `Diagnostic` instance

Description

A `DiagnosticResult` object captures the result of a diagnosed Diagnostic instance. It is safer to work with `DiagnosticResult` instances than to work directly with the Diagnostic instances.

Only the test framework constructs this class directly. The test framework assigns property values to the `DiagnosticResult` instance from the property values of objects of the `QualificationEventData`, `LoggedDiagnosticEventData`, `QualificationDiagnosticRecord`, and `LoggedDiagnosticRecord` classes.

Properties

`Artifacts` — Artifacts produced during last diagnostic evaluation

array of artifacts

The artifacts produced during the last diagnostic evaluation of a `Diagnostic`, returned as an array of artifacts. After the test framework diagnoses the `Diagnostic` object, it copies the value of the `Artifacts` property to the `DiagnosticResult` instance.

`DiagnosticText` — Result of diagnostic evaluation

character vector

Result of a diagnostic evaluation of a `Diagnostic` object, returned as a character vector. After the test framework diagnoses the `Diagnostic` object, it copies the value of the `DiagnosticText` property to the `DiagnosticResult` instance.

Data Types: `char`

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.diagnostics.LoggedDiagnosticEventData | matlab.unittest.qualifications.QualificationEventData | matlab.unittest.plugins.diagnosticrecord.QualificationDiagnosticRecord | matlab.unittest.plugins.diagnosticrecord.LoggedDiagnosticRecord

Introduced in R2017a

matlab.unittest.diagnostics.DisplayDiagnostic class

Package: matlab.unittest.diagnostics
Superclasses: matlab.unittest.diagnostics.Diagnostic

Diagnostic using a value's displayed output

Description

The `DisplayDiagnostic` class provides a diagnostic result that uses a value's displayed output. This output is the same text displayed using the `display` function. When the diagnostic information is accessible through a variable in the current workspace, the `DisplayDiagnostic` class is a means to provide quick diagnostic information.

Construction

`DisplayDiagnostic(diagValue)` creates a new `DisplayDiagnostic` instance.

Input Arguments

`diagValue`

The value that the `Diagnostic` uses to generate diagnostic information.

The resulting diagnostic information is equivalent to displaying this value at the MATLAB command prompt. The result is packaged for consumption by the testing framework, which may or may not display the information at the command prompt.

Properties

`Value`

The value that the `Diagnostic` uses to generate diagnostic information, specified in the `diagValue` input argument. This property is read-only.

Inherited Properties

`DiagnosticText`

The `DiagnosticText` property provides the means by which the actual diagnostic information is communicated to consumers of diagnostics, such as testing frameworks. The property is a character vector that is defined during evaluation of the `diagnose` method.

Methods

Inherited Methods

diagnose	Execute diagnostic action
join	Join multiple diagnostics into a single array

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create `DisplayDiagnostic` Object

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.diagnostics.DisplayDiagnostic

testCase = TestCase.forInteractiveUse;
```

Use a `DisplayDiagnostic` to display diagnostic information upon test failure.

```
testCase.verifyThat(1, IsEqualTo(2), DisplayDiagnostic(inputParser))
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------
      inputParser with properties:

           FunctionName: ''
          CaseSensitive: 0
          KeepUnmatched: 0
        PartialMatching: 1
           StructExpand: 1
             Parameters: {1x0 cell}
                Results: [1x1 struct]
               Unmatched: [1x1 struct]
          UsingDefaults: {1x0 cell}

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> NumericComparator failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                1         2           -1       -0.5

Actual double:
         1
Expected double:
         2
```

In the test diagnostic section of the output, the output from `inputParser` object is the same as MATLAB displays at the command prompt.

See Also

See Also

FunctionHandleDiagnostic | `matlab.unittest.diagnostics` | StringDiagnostic

Introduced in R2013a

matlab.unittest.diagnostics.FigureDiagnostic class

Package: matlab.unittest.diagnostics

Diagnostic to save specified figure

Description

Use the `FigureDiagnostic` class to create a diagnostic that saves a figure to a file. The file persists after MATLAB completes the test run, and so it is available for post-test inspection.

Construction

`FigureDiagnostic(fig)` creates a diagnostic to save a specified figure. When the testing framework diagnoses the `FigureDiagnostic` instance, it saves `fig` to a FIG file and to a PNG file. Each file has a unique name consisting of a prefix (`'Figure_'`, by default), an automatically generated identifier, and the file extension. An example file name is `Figure_cf95fe7f-5a7c-4310-9c19-16c0c17a969f.png`. To view the location of the file, access the `FileArtifact` object through the `TestResult` instance.

`FigureDiagnostic(fig,Name,Value)` creates a diagnostic with additional options specified by one or more `Name,Value` pair arguments. You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`. For example, `FigureDiagnostic(fig,'Prefix','LoggedFigure_','Formats','png')` saves `fig` as a PNG file only, and uses the prefix `'LoggedFigure_'` instead of `'Figure_'`.

Input Arguments

`fig` — Figure to save
`Figure` object

Figure to save when the testing framework diagnoses the `FigureDiagnostic` instance, specified as a `Figure` object.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `FigureDiagnostic(testFig,'Formats','fig')`

`'Formats'` — File format of figure
`["fig" "png"]` (default) | `"fig"` | `"png"`

File format of figure, specified as `["fig" "png"]`, `"fig"`, or `"png"`. You can specify these values as character vectors, as `{'fig','png'}`, `'fig'`, or `'png'`. Within the object, MATLAB stores them as strings.

`'Prefix'` — File name prefix
`'Figure_'` (default) | text

File name prefix, specified as text. If you do not specify a prefix, the default prefix is `'Figure_'`. Specify the value as a character vector or string scalar. Within the object, MATLAB stores it as character vectors.

Example: `'LoggedFigure_'`

Example: `"TestFig-"`

Properties

`Figure` — Figure to save
`Figure` object

Figure to save when the testing framework diagnoses the `FigureDiagnostic` instance, returned as a `Figure` object. The `Figure` property is read-only, and its value is set during construction.

`Formats` — File format for the saved figure
`["fig" "png"]` (default) | `"fig"` | `"png"`

File format for the saved figure, returned as `["fig" "png"]`, `"fig"`, or `"png"`. The `Formats` property is read-only, and its value is set during construction.

`Prefix` — File name prefix
`'Figure_'` (default) | character vector

File name prefix, returned as a character vector. The default prefix is `'Figure_'`. The `Prefix` property is read-only, and its value is set during construction.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create `FigureDiagnostic` Object

Create a `TestCase` for interactive use.

```
import matlab.unittest.TestCase
testCase = TestCase.forInteractiveUse;
```

Create a figure.

```
fig = figure;
ax = axes(fig);
surf(ax,peaks)
```

Use a `FigureDiagnostic` to save the figure as a test diagnostic. Verify that the figure has no children. This qualification fails and MATLAB displays the test diagnostic.

```
import matlab.unittest.diagnostics.FigureDiagnostic
testCase.verifyEmpty(fig.Children,FigureDiagnostic(fig))
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------
Figure saved to:
--> C:\work\Temp\Figure_0b3da19f-5248-442b-aebf-3fb6d707fd1b.fig
--> C:\work\Temp\Figure_0b3da19f-5248-442b-aebf-3fb6d707fd1b.png

---------------------
```

```
Framework Diagnostic:
---------------------
verifyEmpty failed.
--> The value must be empty.
--> The value has a size of [1  1].

Actual matlab.graphics.axis.Axes:
      Axes with properties:

                 XLim: [0 50]
                 YLim: [0 60]
               XScale: 'linear'
               YScale: 'linear'
        GridLineStyle: '-'
             Position: [0.130000000000000 0.110000000000000 0.775000000000000 0.815000
                Units: 'normalized'

      Use get to show all properties
```

Specify Format and Prefix for `FigureDiagnostic`

Create a `TestCase` for interactive use.

```
import matlab.unittest.TestCase
testCase = TestCase.forInteractiveUse;
```

Create a figure.

```
fig = figure;
membrane(6)
```

Use a `FigureDiagnostic` to log the figure as a test diagnostic. Save the file only as a PNG and use a custom prefix for the file name.

```
import matlab.unittest.diagnostics.FigureDiagnostic
testCase.log(FigureDiagnostic(fig,'Formats',{'png'},'Prefix','LoggedFigure_'))
```

```
Interactive diagnostic logged.
Figure saved to:
--> C:\work\Temp\LoggedFigure_0a02faa1-3e14-4783-9954-b56caa6b326d.png
```

Create Test Report That Includes Artifacts

In a file in your current working folder, create the `FigurePropTest` test class. If the `failingTest` test method fails (it always does in this example), it uses a `FigureDiagnostic` to save the figure so you can examine it later.

```
classdef FigurePropTest < matlab.unittest.TestCase
    properties
        TestFigure
    end
    methods(TestMethodSetup)
        function createFigure(testCase)
            testCase.TestFigure = figure;
        end
    end
    methods(TestMethodTeardown)
        function closeFigure(testCase)
            close(testCase.TestFigure)
        end
    end
    methods(Test)
        function defaultCurrentPoint(testCase)
            cp = testCase.TestFigure.CurrentPoint;
            testCase.verifyEqual(cp,[0 0], ...
                'Default current point is incorrect')
        end
        function defaultCurrentObject(testCase)
            import matlab.unittest.constraints.IsEmpty
            co = testCase.TestFigure.CurrentObject;
            testCase.verifyThat(co,IsEmpty, ...
                'Default current object should be empty')
        end
        function failingTest(testCase)
            import matlab.unittest.diagnostics.FigureDiagnostic
            fig = testCase.TestFigure;
            ax = axes(fig);
            surf(ax,peaks)
            testCase.verifyEmpty(testCase.TestFigure.Children, ...
                FigureDiagnostic(testCase.TestFigure))
        end
    end
end
```

At the command prompt, create a test suite.

```
suite = testsuite('FigurePropTest');
```

Create a silent test runner that records diagnostics and generates a PDF report.

```
import matlab.unittest.plugins.DiagnosticsRecordingPlugin
import matlab.unittest.plugins.TestReportPlugin
```

```
runner = matlab.unittest.TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin);
runner.addPlugin(TestReportPlugin.producingPDF('MyTestReport.pdf'));
```

Change the default artifact root to your current working folder.

```
runner.ArtifactsRootFolder = pwd;
```

Run the tests. The third test fails.

```
results = runner.run(suite)
```

```
Generating report. Please wait.
    Preparing content for the report.
    Adding content to the report.
    Writing report to file.
Report has been saved to: C:\work\MyTestReport.pdf

results =

  1×3 TestResult array with properties:

    Name
    Passed
    Failed
    Incomplete
    Duration
    Details

Totals:
   2 Passed, 1 Failed, 0 Incomplete.
   1.2295 seconds testing time.
```

Display the test diagnostic results for the third test. The test framework saved two artifacts related to the third test. By default, a `FigureDiagnostic` object saves a figure as both a PNG file and a FIG file.

```
results(3).Details.DiagnosticRecord.TestDiagnosticResults
```

```
ans =

  DiagnosticResult with properties:

         Artifacts: [1×2 matlab.unittest.diagnostics.FileArtifact]
```

```
    DiagnosticText: 'Figure saved to:↵--> C:\work\715b5416-5c52-4a53-bbec-837a5db57392\
```

Display the stored location of the first artifact.

```
results(3).Details.DiagnosticRecord.TestDiagnosticResults.Artifacts(1)
```

```
ans =

  FileArtifact with properties:

        Name: "Figure_284d9501-2121-45a1-bf5c-18904ce11e8f.fig"
    Location: "C:\work\715b5416-5c52-4a53-bbec-837a5db57392"
    FullPath: "C:\work\715b5416-5c52-4a53-bbec-837a5db57392\Figure_284d9501-2121-45a1-b
```

To inspect the image related to the failed test, open the file at the location shown in the `FullPath` field. Additionally, since you generated a PDF test report, the image is captured in `MyTestReport.pdf`. The test report also contains the path to the artifacts.

Tips

- The location of the saved figure is a folder with a name unique to a test run within the folder contained in the `ArtifactsRootFolder`. If you are running a test without a `TestRunner`, for example with `matlab.unittest.TestCase.forInteractiveUse`, the root folder is the value returned by `tempdir()`.
- To determine the path of the saved figure, access the `FileArtifact` object for a particular test result. For example, assume that `res` is a `TestResult` array. Determine the location of the saved figure for the first element of the array as follows.

  ```
  res(1).Details.DiagnosticRecord.TestDiagnosticResults.Artifacts
  ```

  ```
  ans =

    FileArtifact with properties:

          Name: "Figure_3984704d-b884-44c2-b3ee-7ed10d36e967.png"
      Location: "C:\mywork\Temp\a1f80242-8f8a-4678-9124-415980432d08"
      FullPath: "C:\mywork\Temp\a1f80242-8f8a-4678-9124-415980432d08\Figure_3984704d-b
  ```

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.diagnostics.FileArtifact

Introduced in R2017a

matlab.unittest.diagnostics.FileArtifact class

Package: matlab.unittest.diagnostics

Artifact associated with a file on disk

Description

Use the `FileArtifact` class to reference files on disk and to copy the files to a new location conveniently.

Construction

`artifact = FileArtifact(filename)` creates an artifact associated with a particular file on disk.

Input Arguments

`filename` — Name of file
character vector | string scalar

Name of file on disk, specified as a character vector or string scalar.

Example: `"myFile.txt"`

Properties

`Name` — Artifact name
string scalar

Artifact name, returned as a string scalar. For example, if the full path of a file artifact is `"C:\Hello\World.txt"`, the value of `Name` would be `"World.txt"`.

`Location` — Parent folder
string scalar

The parent folder where the artifact is located, returned as a string scalar.

Example: If the full path of a file artifact is `"C:\Hello\World.txt"`, the value of `Location` is `"C:\Hello"`.

`FullPath` — Full path to artifact

string scalar

The full path to the artifact, returned as a string scalar.

Example: `"C:\Hello\World.txt"`

Methods

copyTo	Copy artifacts to new location

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create `FileArtifact` Instance

Create a file and write data to it.

```
filename = "MyFile.txt";
fileID = fopen(filename,'w');
fwrite(fileID,rand(5));
fclose(fileID);
```

Create a `FileArtifact` instance. In this example, the current working folder is `"C:\work"`.

```
import matlab.unittest.diagnostics.FileArtifact;
artifact = FileArtifact(filename)
```

```
artifact = 

  FileArtifact with properties:
```

```
    Name: "MyFile.txt"
Location: "C:\work\Desktop"
FullPath: "C:\work\Desktop\MyFile.txt"
```

See Also

See Also

matlab.unittest.diagnostics.FigureDiagnostic | matlab.unittest.diagnostics.ScreenshotDiagnostic | matlab.unittest.diagnostics.DiagnosticResult

Introduced in R2017a

copyTo

Class: matlab.unittest.diagnostics.FileArtifact
Package: matlab.unittest.diagnostics

Copy artifacts to new location

Syntax

```
newArtifacts = copyTo(artifact,destination)
```

Description

`newArtifacts = copyTo(artifact,destination)` copies artifacts to a new location and returns an array of updated `matlab.unittest.diagnostics.Artifact` instances. The `copyTo` method sets the `Location` property on each instance of `newArtifacts` to `destination`.

Input Arguments

`artifact` — Artifacts to copy to new location

array of `matlab.unittest.diagnostics.FileArtifact` instances

Artifacts to copy to a new location, specified as an array of `matlab.unittest.diagnostics.FileArtifact` instances.

`destination` — New location for artifacts

character vector | string scalar

New location for the artifacts, specified as a character vector or string scalar.

Example: `tempdir()`

Example: `"mySubFolder`

Example: `'C:\work'`

Examples

Copy Artifacts to New Location

Create an array of file artifacts. This example assumes that files called `someFile.m` and `anotherFile.m` exist in your current working folder.

```
import matlab.unittest.diagnostics.FileArtifact;
fileArtifact1 = FileArtifact('someFile.m');
fileArtifact2 = FileArtifact('anotherFile.m');
artifacts = [fileArtifact1 fileArtifact2];
```

Copy the artifacts to a temporary folder.

```
destination = tempdir();
newArtifacts = artifacts.copyTo(destination);
```

See Also

Introduced in R2017a

matlab.unittest.diagnostics.FunctionHandleDiagnostic class

Package: matlab.unittest.diagnostics
Superclasses: matlab.unittest.diagnostics.Diagnostic

Diagnostic using a function's displayed output

Description

The `FunctionHandleDiagnostic` class provides a diagnostic result using a function's displayed output. This output is the same as the text displayed at the command prompt when MATLAB executes the function handle. When the diagnostic information is accessible through information displayed as output of the function handle, the `FunctionHandleDiagnostic` is a means to provide quick diagnostic information.

When using `matlab.unittest` qualifications, a function handle can be supplied directly as a test diagnostic. In this case, the testing framework automatically creates a `FunctionHandleDiagnostic` object.

Construction

`FunctionHandleDiagnostic(fcnHandle)` creates a new `FunctionHandleDiagnostic` instance.

Input Arguments

`fcnHandle`

The function handle that the `Diagnostic` uses to generate diagnostic information.

The resulting diagnostic information is equivalent to output displayed at the MATLAB command prompt. The result is packaged for consumption by the testing framework, which may or may not display the information at the command prompt.

Properties

Fcn

The function handle that the `Diagnostic` uses to generate diagnostic information, specified in the `fcnHandle` input argument. This property is read-only.

Inherited Properties

DiagnosticText

The `DiagnosticText` property provides the means by which the actual diagnostic information is communicated to consumers of diagnostics, such as testing frameworks. The property is a character vector that is defined during evaluation of the `diagnose` method.

Methods

Inherited Methods

diagnose	Execute diagnostic action
join	Join multiple diagnostics into a single array

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create FunctionHandleDiagnostic Object

Create a diagnostic result that displays the output of the `dir` function when a test fails.

Create a folder in your current working folder.

```
mkdir('subfolderInCurrentFolder')
```

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.diagnostics.FunctionHandleDiagnostic

testCase = TestCase.forInteractiveUse;
```

Use a `FunctionHandleDiagnostic` to display diagnostic information upon test failure.

```
testCase.verifyThat(1, IsEqualTo(2), FunctionHandleDiagnostic(@dir))
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------

.                          ..                        subfolderInCurrentFolder



---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> NumericComparator failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                1         2           -1       -0.5

Actual double:
         1
Expected double:
         2
```

Upon test failure, the diagnostic displays the contents of the current working folder. In this example output, the folder only contains the subfolder `subfolderInCurrentFolder`.

Alternatively, the test framework can create a `FunctionHandleDiagnostic` object for you from a function handle input to the `verifyThat` qualification.

```
testCase.verifyThat(1, IsEqualTo(2), @dir)
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------

.                         ..                        subfolderInCurrentFolder



---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> NumericComparator failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                1         2           -1       -0.5

Actual double:
         1
Expected double:
         2
```

The testing framework only creates the `FunctionHandleDiagnostic` object as needed, typically only in the event of a test failure.

See Also

See Also

matlab.unittest.plugins.DiagnosticsValidationPlugin | `matlab.unittest.diagnostics` | StringDiagnostic

Introduced in R2013a

matlab.unittest.diagnostics.LoggedDiagnosticEventData class

Package: matlab.unittest.diagnostics

Event data for DiagnosticLogged event listeners

Description

The `LoggedDiagnosticEventData` class holds event data for `DiagnosticLogged` event listeners. Invoking the `log` method within your tests triggers the `DiagnosticLogged` event listeners. Only the test framework constructs this class directly.

Properties

`Verbosity`

Verbosity level of the logged message, represented as a `matlab.unittest.Verbosity` enumeration.

`Timestamp`

Date and time of the call to the `log` method, represented as a `datetime` value.

`Diagnostic`

Diagnostic specified in the call to the `log` method, represented as a character vector, string, function handle, or instance of `matlab.unittest.diagnostics.Diagnostic`.

`Stack`

Function call stack leading up to the call to the `log` method, represented as a structure array.

`DiagnosticResults`

Results of diagnostics specified in a or method call, represented as an array of `DiagnosticResult` instances.

See Also

See Also

matlab.unittest.TestCase.log | matlab.unittest.TestCase | matlab.unittest.fixtures.Fixture.log | matlab.unittest.fixtures.Fixture

matlab.unittest.diagnostics.ScreenshotDiagnostic class

Package: matlab.unittest.diagnostics

Diagnostic to capture screen as image file

Description

Use the `ScreenshotDiagnostic` class to create a diagnostic that captures the screen as an image file. The file persists after MATLAB completes the test run, and so it is available for post-test inspection.

Construction

`ScreenshotDiagnostic()` creates a diagnostic that captures the screen as image file. When the testing framework diagnoses the `ScreenshotDiagnostic` instance, it saves the screenshot to a PNG file. The file has a unique name consisting of a prefix (`Screenshot_'`, by default), an automatically generated identifier, and the file extension. An example file name is `Screenshot_cf95fe7f-5a7c-4310-9c49-16c0c18a969f.png`. To view the location of the file, access the `FileArtifact` object through the `TestResult` instance.

`ScreenshotDiagnostic('Prefix',prefix)` creates a diagnostic that saves the screenshot to a file with a name that begins with a specified prefix.

Input Arguments

`prefix` — File name prefix
`'Screenshot_'` (default) | text

File name prefix, specified as text. If you do not specify a prefix, the default prefix is `'Screenshot_'`. Specify the value as a character vector or string scalar. Within the object, MATLAB stores them as character vectors.

Example: `'LoggedScreenshot_'`

Example: `"TestScreenshot-"`

Properties

`Prefix` — File name prefix

`'Screenshot_'` (default) | character vector

File name prefix, returned as a character vector. The default prefix is `'Screenshot_'`. The `Prefix` property is read-only, and its value is set during construction.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create `ScreenshotDiagnostic` Object

Create a `TestCase` for interactive use.

```
import matlab.unittest.TestCase
testCase = TestCase.forInteractiveUse;
```

Use a `ScreenshotDiagnostic` to save an image of the desktop as a test diagnostic.

```
import matlab.unittest.diagnostics.ScreenshotDiagnostic
testCase.verifyTrue(false,ScreenshotDiagnostic)
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------
Screenshot captured to:
--> C:\work\Temp\Screenshot_e99834ed-75e9-4ee1-9596-2f95e64b0ff1.png

---------------------
Framework Diagnostic:
```

```
----------------------
verifyTrue failed.
--> The value must evaluate to "true".

Actual logical:
       0
```

Specify Prefix for `ScreenshotDiagnostic` Object

Create a `TestCase` for interactive use.

```
import matlab.unittest.TestCase
testCase = TestCase.forInteractiveUse;
```

Use a `ScreenshotDiagnostic` to log an image of the desktop as a test diagnostic with a custom prefix

```
import matlab.unittest.diagnostics.ScreenshotDiagnostic
testCase.log(ScreenshotDiagnostic('Prefix','LoggedScreenshot_'))
```

```
Interactive diagnostic logged.
Screenshot captured to:
--> C:\work\Temp\LoggedScreenshot_35bb1ecb-441a-4f79-9f59-8b18ac3f9d12.png
```

Create Test with Screenshot Artifacts

In a file in your current working folder, create the `ScreenShotExampleTest` test class. When the `failingTest` test method fails (it always does in this example), it uses a `ScreenshotDiagnostic` to capture an image of the screen so you can examine it later. The `logScreenshotTest` test always captures an image of the screen and saves it in a file prefixed with `LoggedScreenshot_`.

```
classdef ScreenShotExampleTest < matlab.unittest.TestCase
    methods (Test)
        function passingTest(testCase)
            testCase.verifyEqual(7,4+3);
        end
        function failingTest(testCase)
            import matlab.unittest.diagnostics.ScreenshotDiagnostic
            testCase.verifyFalse(true,ScreenshotDiagnostic);
        end
        function logScreenshotTest(testCase)
            import matlab.unittest.diagnostics.ScreenshotDiagnostic
            testCase.verifySubstring("Some Long Message","sage");
```

```
            testCase.log(1,ScreenshotDiagnostic('Prefix','LoggedScreenshot_'));
        end
    end
end
```

Run the tests.

```
res = runtests('ScreenShotExampleTest');
```

```
Running ScreenShotExampleTest
.
================================================================================
Verification failed in ScreenShotExampleTest/failingTest.

    ----------------
    Test Diagnostic:
    ----------------
    Screenshot captured to:
    --> C:\Temp\bf0e26d1-8d47-4462-b1f2-673c7d35c236\Screenshot_b24f2219-61a4-4cf8-b4da

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyFalse failed.
    --> The value must evaluate to "false".

    Actual logical:
           1

    ------------------
    Stack Information:
    ------------------
    In C:\work\ScreenShotExampleTest.m (ScreenShotExampleTest.failingTest) at 8
================================================================================
.   [Terse] Diagnostic logged (2016-12-22T11:21:54):
Screenshot captured to:
--> C:\Temp\bf0e26d1-8d47-4462-b1f2-673c7d35c236\LoggedScreenshot_26def240-9a9d-4147-9c

.
Done ScreenShotExampleTest
__________

Failure Summary:

     Name                                Failed  Incomplete  Reason(s)
```

```
    ================================================================================
     ScreenShotExampleTest/failingTest    X                 Failed by verification.
```

The framework diagnostics in the Command Window indicate the captured screenshots. You can also access these locations programmatically through the diagnostic records of the test results.

Since the second test fails, the screenshot is saved as part of the test diagnostics. Access the path to the screenshot through the `Artifacts` object on the `TestDiagnosticResults`.

```
res(2).Details.DiagnosticRecord.TestDiagnosticResults.Artifacts.FullPath
```

```
ans =

    "C:\Temp\bf0e26d1-8d47-4462-b1f2-673c7d35c236\Screenshot_b24f2219-61a4-4cf8-b4da-fe
```

The third test passes, and the screenshot is saved as part of a logged diagnostic (through the `log` method on the `TestCase`). Access the path to the screenshot through the `Artifacts` object on the `LoggedDiagnosticResults`.

```
res(3).Details.DiagnosticRecord.LoggedDiagnosticResults.Artifacts.FullPath
```

```
ans =

    "C:\Temp\bf0e26d1-8d47-4462-b1f2-673c7d35c236\LoggedScreenshot_26def240-9a9d-4147-9
```

Tips

- The location of the saved screenshot is a folder with a name unique to a test run within the folder contained in the `ArtifactsRootFolder`. If you are running a test interactively, the location of the root folder is the value returned by `tempdir()`.
- To determine the path of the saved screenshot, access the `FileArtifact` object for a particular test result. For example, assume that you have a `TestResult` array, `res`. Determine the location of the saved figure for the first element of the array as follows.

  ```
  res(1).Details.DiagnosticRecord.TestDiagnosticResults.Artifacts
  ```

  ```
  ans =

    FileArtifact with properties:
  ```

```
    Name: "Screenshot_f51601ef-86bc-499c-bcec-203969f72a85.png"
Location: "C:\work\Temp\1f4d3b64-3201-4bde-92ed-ad6859e97051"
FullPath: "C:\work\Temp\1f4d3b64-3201-4bde-92ed-ad6859e97051\Screenshot_f51601ef
```

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.diagnostics.FileArtifact

Introduced in R2017a

matlab.unittest.diagnostics.StringDiagnostic class

Package: matlab.unittest.diagnostics
Superclasses: matlab.unittest.diagnostics.Diagnostic

Diagnostic using string

Description

The `StringDiagnostic` class provides a diagnostic result that uses a string. When the diagnostic information is known at the time of construction, the `StringDiagnostic` is a means to provide quick diagnostic information.

When using `matlab.unittest` qualifications, a string can be supplied directly as a test diagnostic. In this case, the testing framework automatically creates a `StringDiagnostic` object.

Construction

`StringDiagnostic(diagString)` creates a new `StringDiagnostic` instance.

Input Arguments

`diagString`

The string that the `Diagnostic` uses to generate diagnostic information.

Methods

Inherited Methods

diagnose	Execute diagnostic action
join	Join multiple diagnostics into a single array

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create `StringDiagnostic` Object

Create a test case for interactive testing.

```
import matlab.unittest.TestCase
import matlab.unittest.constraints.IsEqualTo
import matlab.unittest.diagnostics.StringDiagnostic

testCase = TestCase.forInteractiveUse;
```

Use a `StringDiagnostic` to display diagnostic information upon test failure.

```
testCase.verifyThat(1, IsEqualTo(2), ...
    StringDiagnostic('actual was supposed to be equal to expected') )
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------
actual was supposed to be equal to expected

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> NumericComparator failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                1         2           -1       -0.5

Actual double:
         1
```

```
Expected double:
         2
```

Alternatively, the test framework can create a `StringDiagnostic` object for you from a string input to the `verifyThat` qualification.

```
testCase.verifyThat(1, IsEqualTo(2), ...
    'actual was supposed to be equal to expected' )
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------
actual was supposed to be equal to expected

---------------------
Framework Diagnostic:
---------------------
IsEqualTo failed.
--> NumericComparator failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                1         2           -1       -0.5

Actual double:
         1
Expected double:
         2
```

The testing framework only creates the `StringDiagnostic` object as needed, typically only in the event of a test failure.

See Also

See Also

FunctionHandleDiagnostic | `matlab.unittest.diagnostics`

Introduced in R2013a

dialog

Create empty modal dialog box

Syntax

```
d = dialog
d = dialog(Name,Value)
```

Description

`d = dialog` creates an empty dialog box and returns `d`, a figure object. Use the `uicontrol` function to add user interface controls to a dialog.

`d = dialog(Name,Value)` specifies one or more figure property names and corresponding values. Use this syntax to override the default properties.

Examples

Dialog Containing Text and a Button

Use the `uicontrol` function to add user interface controls to a dialog box. For instance, create a program file called `mydialog.m` that displays a dialog containing text and a button.

```
function mydialog
    d = dialog('Position',[300 300 250 150],'Name','My Dialog');

    txt = uicontrol('Parent',d,...
               'Style','text',...
               'Position',[20 80 210 40],...
               'String','Click the close button when you''re done.');

    btn = uicontrol('Parent',d,...
               'Position',[85 20 70 25],...
               'String','Close',...
               'Callback','delete(gcf)');
end
```

Next, run the `mydialog` function from the Command Window.

```
mydialog
```

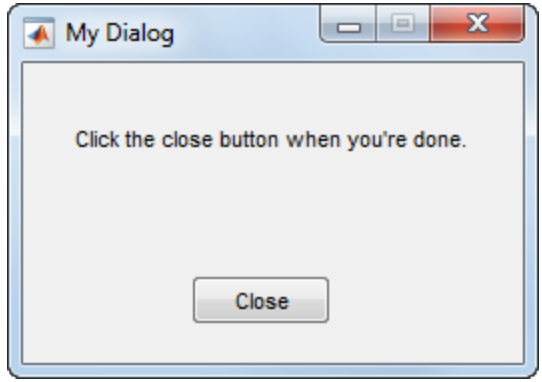

Dialog That Returns Output

Use the `uiwait` function to return output based on user selections in the dialog box. For instance, create a program file called `choosedialog.m` to perform these tasks:

- Call the `dialog` function to create dialog with a specific size, location, and the title, "Select One".
- Call the `uicontrol` function three times to add text, a pop-up menu, and a button, respectively.
- Define the function, `popup_callback`, to serve as the callback function for the button.
- Call the `uiwait` function to wait for the user to close the dialog before returning the output to the command line.

```
function choice = choosedialog

    d = dialog('Position',[300 300 250 150],'Name','Select One');
    txt = uicontrol('Parent',d,...
           'Style','text',...
           'Position',[20 80 210 40],...
           'String','Select a color');

    popup = uicontrol('Parent',d,...
           'Style','popup',...
```

```
            'Position',[75 70 100 25],...
            'String',{'Red';'Green';'Blue'},...
            'Callback',@popup_callback);

    btn = uicontrol('Parent',d,...
            'Position',[89 20 70 25],...
            'String','Close',...
            'Callback','delete(gcf)');

    choice = 'Red';

    % Wait for d to close before running to completion
    uiwait(d);

       function popup_callback(popup,event)
          idx = popup.Value;
          popup_items = popup.String;
          % This code uses dot notation to get properties.
          % Dot notation runs in R2014b and later.
          % For R2014a and earlier:
          % idx = get(popup,'Value');
          % popup_items = get(popup,'String');
          choice = char(popup_items(idx,:));
       end
end
```

Run the `choosedialog` function from the Command Window. Then, select a color in the dialog.

```
color = choosedialog
```

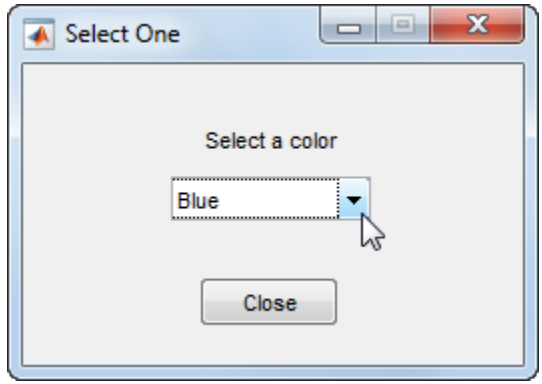

`choosedialog` returns the last selected color when you close the dialog.

```
color =

Blue
```

Note: The `uiwait` function blocks the MATLAB thread. Although `uiwait` works well in a simple modal dialog, it not recommended for use in more sophisticated applications.

Input Arguments

Name-Value Pair Arguments

Example: `'WindowStyle','normal'` sets the `WindowStyle` property to `'normal'`.

The properties listed here are only a subset. For a complete list, see Figure Properties.

`'Position'` — Location and size of window

`[left bottom width height]`

Location and size of window, specified as the vector, `[left bottom width height]`. This table describes the values in the `Position` vector. All values are in units specified by the `Units` property.

Element	Description
`left`	Distance from the left edge of the primary display to the inner left edge of the window. This value can be negative on systems that have more than one monitor.
`bottom`	Distance from the bottom edge of the primary display to the inner bottom edge of the window. This value can be negative on systems that have more than one monitor.
`width`	Distance between the right and left inner edges of the window.
`height`	Distance between the top and bottom inner edges of the window.

Note:

- You cannot specify the `Position` property when the window is docked.
- To place the full window, including the title bar, menu bar, tool bars, and outer edges, use the OuterPosition property.
- The Windows operating system enforces a minimum figure window width. If you specify a width below that value, the figure will display at the Windows minimum width.

Example: `[230 250 570 510]`

Data Types: `double`

`'ButtonDownFcn'` — Button-press callback function

function handle | cell array | character vector

Button-press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

By default, MATLAB sets the `ButtonDownFcn` callback to this character vector:

```
'if isempty(allchild(gcbf)), close(gcbf), end'
```

This command makes the dialog box close when the user clicks the window. For more information about specifying a callback property value as a function handle, cell array, or character vector, see “How to Specify Callback Property Values”.

`'WindowStyle'` — Window behavior

`'modal'` (default) | `'normal'` | `'docked'`

Window behavior, specified as one of the following:

- `'modal'` — The window appears on top of all existing windows, making them inaccessible as long as the top window exists and remains modal. However, nothing prevents the display of subsequent windows after the modal window appears.

- `'normal'` — The window is independent of other windows, and the other windows are accessible while the current window exists.
- `'docked'` — The window appears in the desktop or a document window.

Output Arguments

d — Dialog window

figure object

Dialog window, returned as a figure object with these properties values set.

Property	Value
`ButtonDownFcn`	`'if isempty(allchild(gcbf)), close(gcbf), end'`
`Colormap`	`[]`
`DockControls`	`'off'`
`HandleVisibility`	`'callback'`
`IntegerHandle`	`'off'`
`InvertHardcopy`	`'off'`
`MenuBar`	`'none'`
`Number`	`[]`
`NumberTitle`	`'off'`
`PaperPositionMode`	`'auto'`
`Resize`	`'off'`
`WindowStyle`	`'modal'`

See Also

See Also

`errordlg` | Figure Properties | `msgbox` | `questdlg` | `waitfor` | `warndlg`

Introduced before R2006a

diary

Save Command Window text to file

Syntax

```
diary
diary('filename')
diary off
diary on
diary filename
```

Description

The `diary` function creates a log of keyboard input and the resulting text output, with some exceptions (see "Tips" on page 1-2575 for details). The output of `diary` is an ASCII file, suitable for searching in, printing, inclusion in most reports and other documents. If you do not specify `filename`, the MATLAB software creates a file named `diary` in the current folder.

`diary` toggles `diary` mode on and off. To see the status of `diary`, type `get(0,'Diary')`. MATLAB returns either `on` or `off` indicating the `diary` status.

`diary('filename')` writes a copy of all subsequent keyboard input and the resulting output (except it does not include graphics) to the named file, where `filename` is the full pathname or `filename` is in the current MATLAB folder. If the file already exists, output is appended to the end of the file. You cannot use a `filename` called `off` or `on`. To see the name of the `diary` file, use `get(0,'DiaryFile')`.

`diary` **`off`** suspends the diary.

`diary` **`on`** resumes diary mode using the current filename, or the default filename `diary` if none has yet been specified.

`diary filename` is the unquoted form of the syntax.

Tips

Because the output of `diary` is plain text, the file does not exactly mirror input and output from the Command Window:

- Output does not include graphics (figure windows).
- Syntax highlighting and font preferences are not preserved.
- Hidden components of Command Window output such as hyperlink information generated with `matlab:` are shown in plain text. For example, if you enter the following statement

  ```
  str = sprintf('%s%s', ...
     '<a href="matlab:magic(4)">', ...
     'Generate magic square</a>');
  disp(str)
  ```

  MATLAB displays

  Generate magic square

  However, the diary file, when viewed in a text editor, shows

  ```
  str = sprintf('%s%s', ...
     '<a href="matlab:magic(4)">', ...
     'Generate magic square</a>');
  disp(str)
  <a href="matlab:magic(4)">Generate magic square</a>
  ```

  If you view the output of diary in the Command Window, the Command Window interprets the `<a href ...>` statement and displays it as a hyperlink.
- Viewing the output of `diary` in a console window might produce different results compared to viewing `diary` output in the desktop Command Window. One example is using the `\r` option for the `fprintf` function; using the `\n` option might alleviate that problem.

See Also

`evalc`

Topics

"Command History"

Introduced before R2006a

diff

Differences and Approximate Derivatives

Syntax

```
Y = diff(X)
Y = diff(X,n)
Y = diff(X,n,dim)
```

Description

`Y = diff(X)` calculates differences between adjacent elements of `X` along the first array dimension whose size does not equal 1:

- If `X` is a vector of length `m`, then `Y = diff(X)` returns a vector of length `m-1`. The elements of `Y` are the differences between adjacent elements of `X`.

  ```
  Y = [X(2)-X(1) X(3)-X(2) ... X(m)-X(m-1)]
  ```

- If `X` is a nonempty, nonvector p-by-m matrix, then `Y = diff(X)` returns a matrix of size (p-1)-by-m, whose elements are the differences between the rows of `X`.

  ```
  Y = [X(2,:)-X(1,:); X(3,:)-X(2,:); ... X(p,:)-X(p-1,:)]
  ```

- If `X` is a 0-by-0 empty matrix, then `Y = diff(X)` returns a 0-by-0 empty matrix.

`Y = diff(X,n)` calculates the nth difference by applying the `diff(X)` operator recursively `n` times. In practice, this means `diff(X,2)` is the same as `diff(diff(X))`.

`Y = diff(X,n,dim)` is the nth difference calculated along the dimension specified by `dim`. The `dim` input is a positive integer scalar.

Examples

Differences Between Vector Elements

Create a vector, then compute the differences between the elements.

```
X = [1 1 2 3 5 8 13 21];
Y = diff(X)
```

```
Y =

     0     1     1     2     3     5     8
```

Note that Y has one fewer element than X.

Differences Between Matrix Rows

Create a 3-by-3 matrix, then compute the first difference between the rows.

```
X = [1 1 1; 5 5 5; 25 25 25];
Y = diff(X)
```

```
Y =

     4     4     4
    20    20    20
```

Y is a 2-by-3 matrix.

Multiple Differences

Create a vector and compute the second-order difference between the elements.

```
X = [0 5 15 30 50 75 105];
Y = diff(X,2)
```

```
Y =

     5     5     5     5     5
```

Differences Between Matrix Columns

Create a 3-by-3 matrix, then compute the first-order difference between the columns.

```
X = [1 3 5;7 11 13;17 19 23];
```

```
Y = diff(X,1,2)
```

```
Y =

     2     2
     4     2
     2     4
```

Y is a 3-by-2 matrix.

Approximate Derivatives with diff

Use the `diff` function to approximate partial derivatives with the syntax `Y = diff(f)/h`, where `f` is a vector of function values evaluated over some domain, `X`, and `h` is an appropriate step size.

For example, the first derivative of `sin(x)` with respect to `x` is `cos(x)`, and the second derivative with respect to `x` is `-sin(x)`. You can use `diff` to approximate these derivatives.

```
h = 0.001;        % step size
X = -pi:h:pi;     % domain
f = sin(X);       % range
Y = diff(f)/h;    % first derivative
Z = diff(Y)/h;    % second derivative
plot(X(:,1:length(Y)),Y,'r',X,f,'b', X(:,1:length(Z)),Z,'k')
```

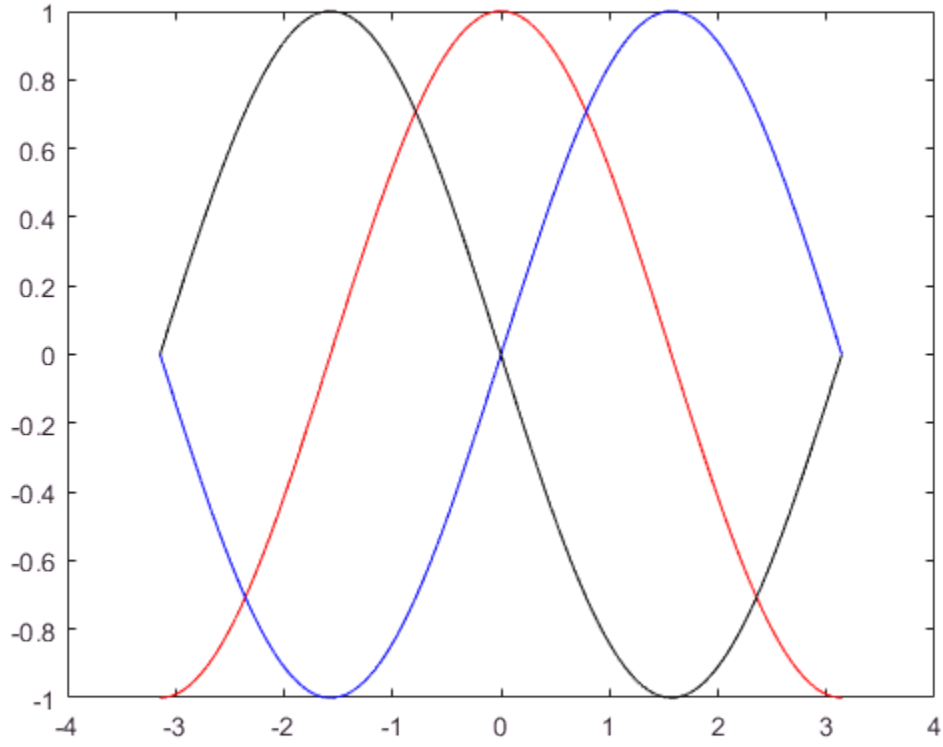

In this plot the blue line corresponds to the original function, `sin`. The red line corresponds to the calculated first derivative, `cos`, and the black line corresponds to the calculated second derivative, `-sin`.

Differences Between Datetime Values

Create a sequence of equally-spaced datetime values, and find the time differences between them.

```
t1 = datetime('now');
t2 = t1 + minutes(5);
t = t1:minutes(1.5):t2
```

```
t = 1×4 datetime array
```

```
   24-Feb-2017 12:52:02   24-Feb-2017 12:53:32   24-Feb-2017 12:55:02   24-Feb-2017 12
```

```
dt = diff(t)
```

```
dt = 1×3 duration array
   00:01:30   00:01:30   00:01:30
```

`diff` returns a `duration` array.

Input Arguments

X — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array. `X` can be a numeric array, logical array, datetime array, or duration array.

Complex Number Support: Yes

n — Difference order

positive integer scalar | `[]`

Difference order, specified as a positive integer scalar or `[]`. The default value of `n` is 1.

It is possible to specify `n` sufficiently large so that `dim` reduces to a single (`size(X,dim) = 1`) dimension. When this happens, `diff` continues calculating along the next array dimension whose size does not equal 1. This process continues until a 0-by-0 empty matrix is returned.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional p-by-m input array, `A`:

- `diff(A,1,1)` works on successive elements in the columns of `A` and returns a (p-1)-by-m difference matrix.
- `diff(A,1,2)` works on successive elements in the rows of `A` and returns a p-by-(m-1) difference matrix.

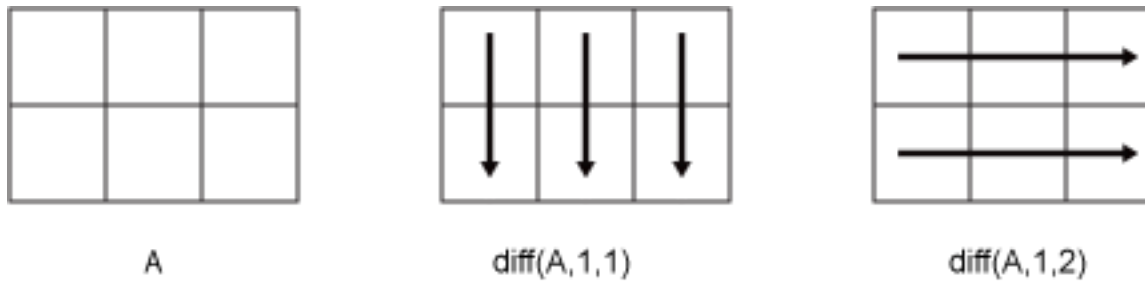

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`Y` — Difference array
scalar | vector | matrix | multidimensional array

Difference array, returned as a scalar, vector, matrix, or multidimensional array. If `X` is a nonempty array, then the dimension of `X` acted on by `diff` is reduced in size by `n` in the output.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

You must use the three-input syntax `Y = diff(X,N,dim)`.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If supplied, the arguments representing the number of times to apply `diff` and the dimension along which to calculate the difference must be constants.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`cumsum` | `gradient` | `prod` | `sum`

Introduced before R2006a

diffuse

Calculate diffuse reflectance

Syntax

```
R = diffuse(Nx,Ny,Nz,S)
```

Description

`R = diffuse(Nx,Ny,Nz,S)` returns the reflectance of a surface with normal vector components `[Nx,Ny,Nz]`. `S` specifies the direction to the light source. You can specify these directions as three vectors`[x,y,z]` or two vectors `[Theta Phi` (in spherical coordinates).

Lambert's Law: `R = cos(PSI)` where `PSI` is the angle between the surface normal and light source.

See Also

`specular` | `surfl` | `surfnorm`

Topics

"Lighting Overview"

condensation

Graph condensation

Syntax

```
C = condensation(G)
```

Description

`C = condensation(G)` returns a directed graph `C` whose nodes represent the strongly connected components in `G`. This reduction provides a simplified view of the connectivity between components.

Examples

Condense Strongly Connected Components into Single Nodes

Create and plot a graph that contains several strongly connected components. Highlight the strongly connected components.

```
s = [1 1 2 3 3 4 4 4 4 5 5 6 6 6 7 8 8 9 9 10 10 10 11 11 12 13 13 14 15];
t = [1 3 1 2 5 1 2 12 13 6 8 7 8 10 10 9 10 5 11 9 11 14 12 14 13 11 15 13 14];
G = digraph(s,t);
p = plot(G);
```

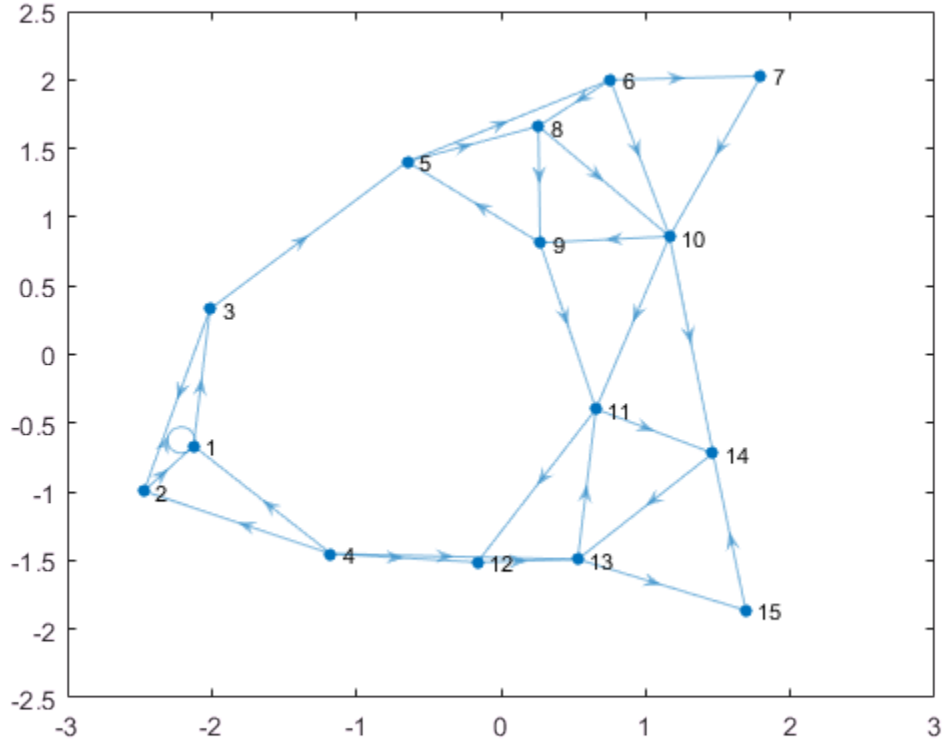


```
bins = conncomp(G);
p.MarkerSize = 7;
p.NodeCData = bins;
colormap(hsv(4))
```

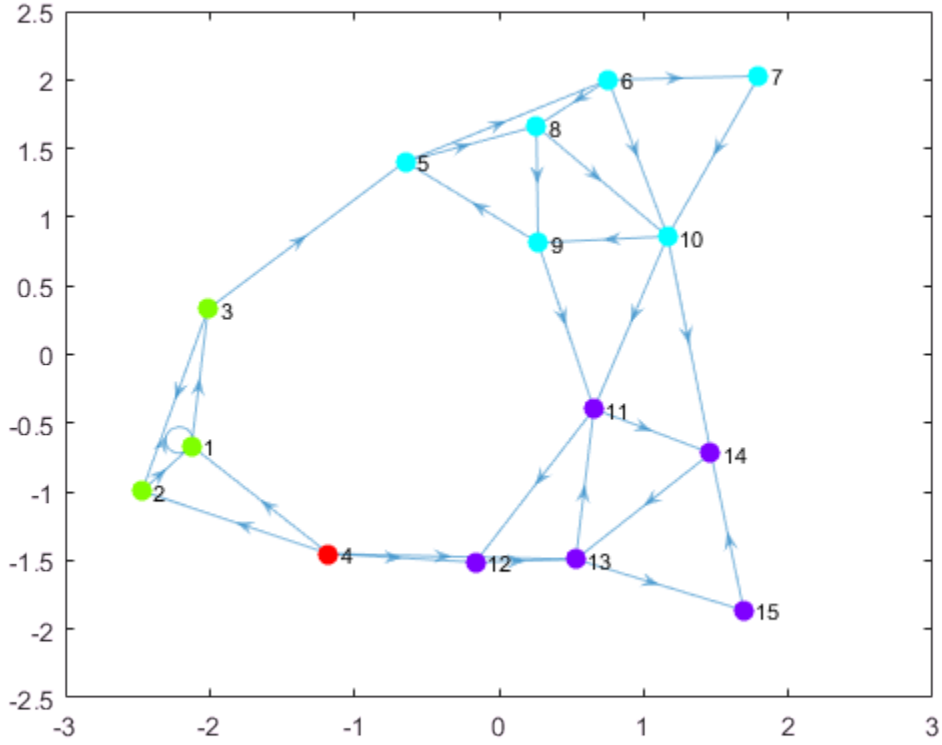

Use `condensation` to represent each component as a single node. Color the nodes based on the components they represent.

```
C = condensation(G);
p2 = plot(C);
p2.MarkerSize = 7;
p2.NodeCData = 1:4;
```

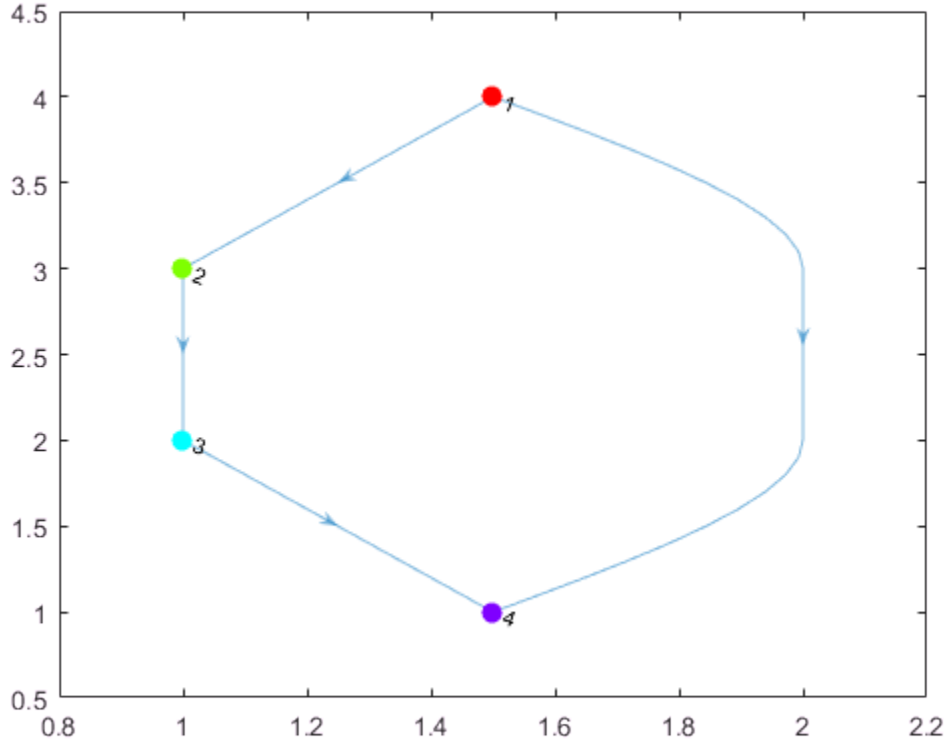


```
colormap(hsv(4))
```

Input Arguments

G — Input graph

digraph object

Input graph, specified as a digraph object. Use the digraph function to create a directed graph object. For more information, see digraph.

Example: G = digraph([1 2],[2 3])

Output Arguments

`C` — Condensation graph

`digraph` object

Condensation graph, returned as a `digraph` object. `C` is a directed acyclic graph (DAG), and is topologically sorted. The node numbers in `C` correspond to the bin numbers returned by `conncomp`.

`condensation` determines the nodes and edges in `C` by the components and connectivity in `G`:

- `C` contains a node for each strongly connected component in `G`.
- `C` contains an edge between node `I` and node `J` if there is an edge from any node in component `I` to any node in component `J` of `G`.

See Also

See Also

`bctree` | `conncomp`

Topics

"Directed and Undirected Graphs"
"Visualize Breadth-First and Depth-First Search"

Introduced in R2016b

flipedge

Reverse edge directions

Syntax

```
H = flipedge(G)
H = flipedge(G,s,t)
H = flipedge(G,idx)
```

Description

`H = flipedge(G)` returns a directed graph that has the same edges as `G`, but with reversed directions. `H` contains the same node and edge properties as `G`.

`H = flipedge(G,s,t)` reverses a subset of edges using the node pairs `s` and `t`.

`H = flipedge(G,idx)` reverses a subset of edges using the edge indices `idx`.

Examples

Reverse All Edges in Graph

Create and plot a directed graph. Then reverse the direction of all of the edges in the graph.

```
G = digraph([1 1 1 1],[2 3 4 5]);
plot(G)
```

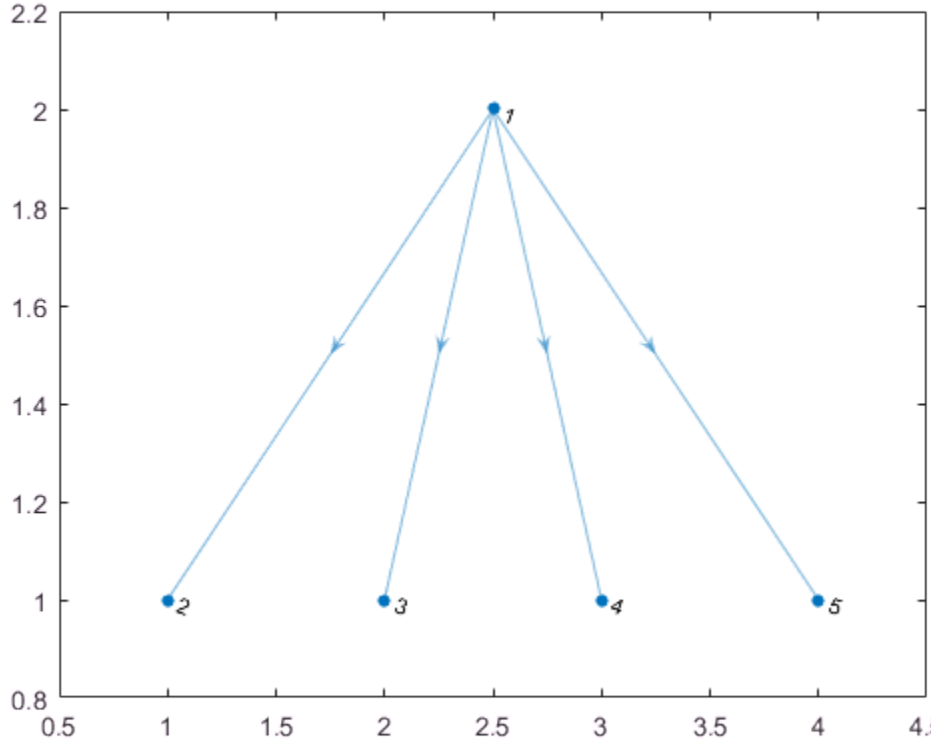


```
H = flipedge(G);
plot(H)
```

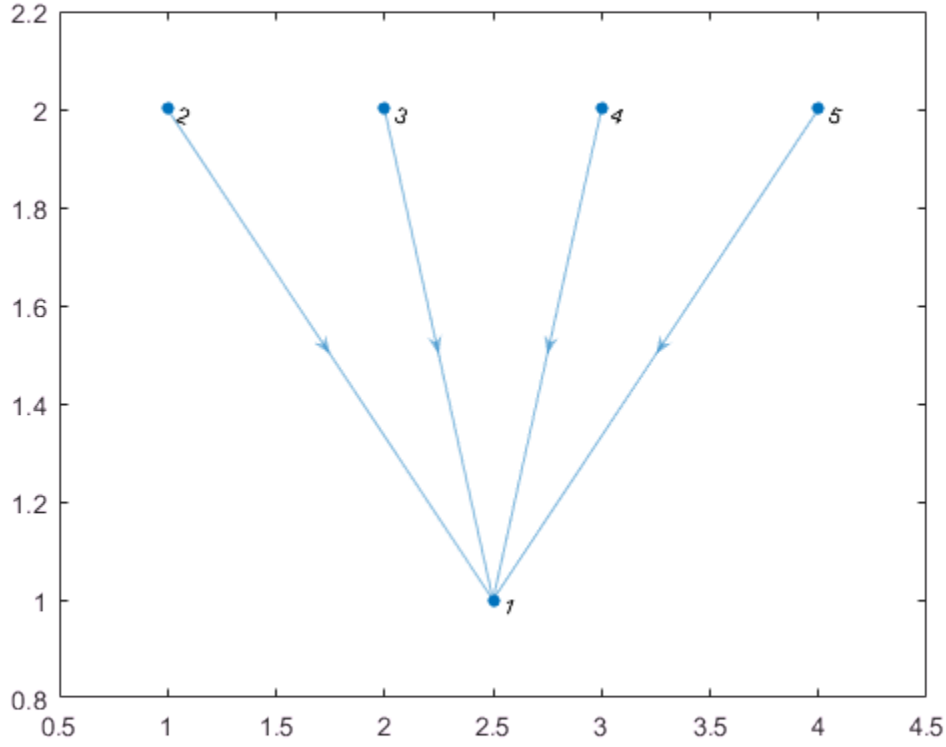

Reverse Subset of Graph Edges

Create and plot a directed graph. Specify custom *xy* node coordinates for the plot.

```
G = digraph([1 1 2 2 3],[2 3 3 4 5]);
x = [1 0 2 -1 3];
y = [1 2 2 2.5 2.5];
plot(G,'XData',x,'YData',y)
```

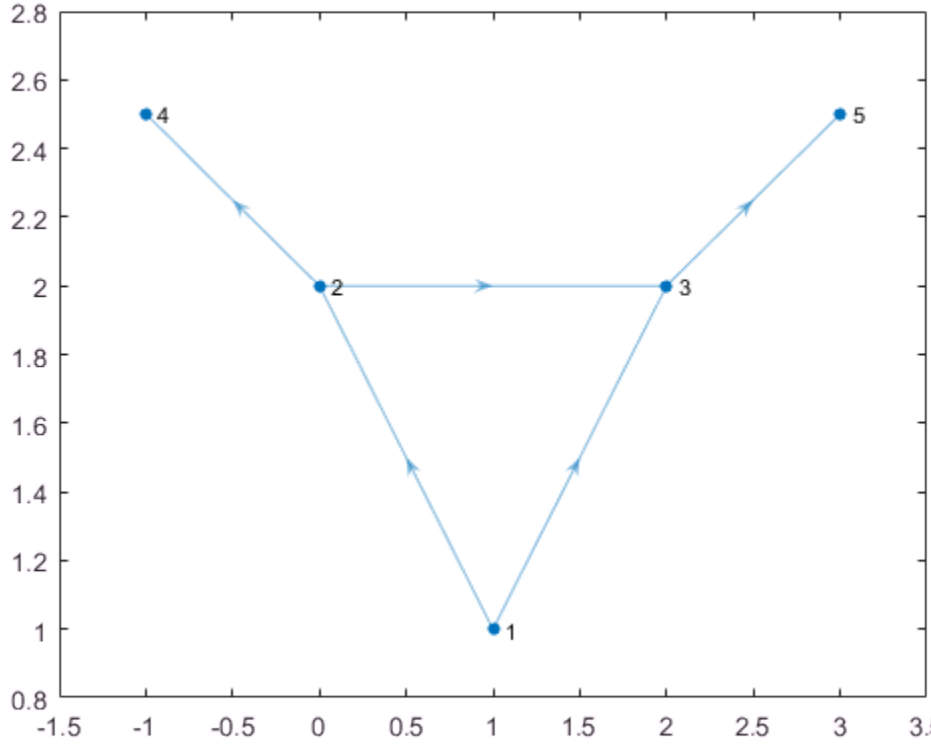

Reverse the direction of the edges (2,4) and (3,5), and then replot the graph.

```
H = flipedge(G,[2 3],[4 5]);
plot(H,'XData',x,'YData',y)
```

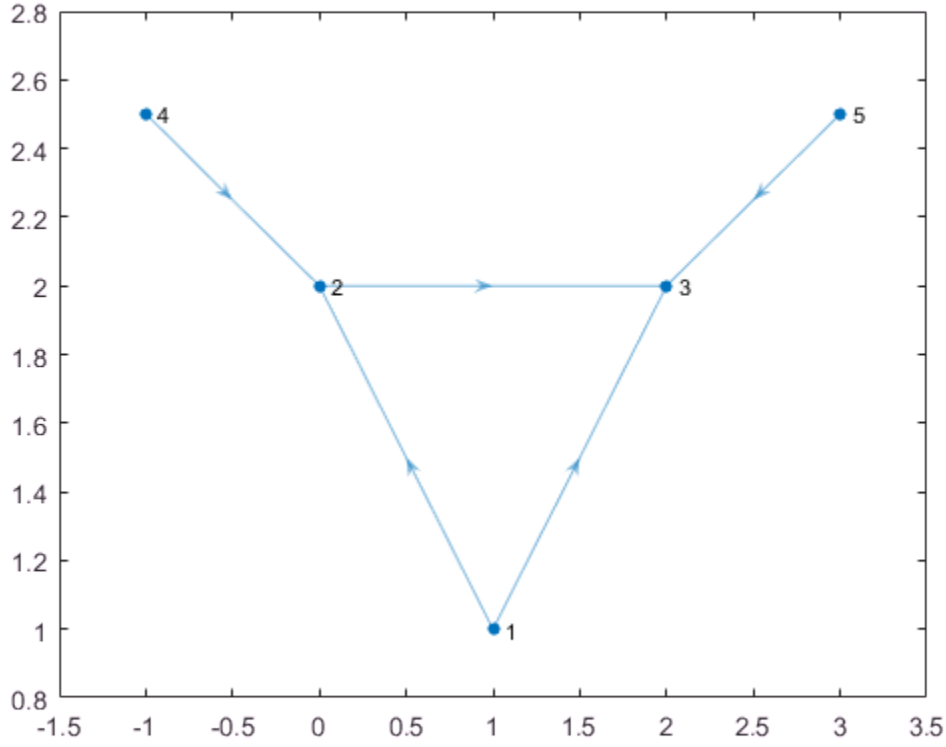

Input Arguments

G — Input graph

`digraph` object

Input graph, specified as a `digraph` object. Use the `digraph` function to create a directed graph object. For more information, see digraph.

Example: `G = digraph([1 2],[2 3])`

s,t — Node pairs (as separate arguments)

scalars | vectors | character vectors | cell arrays of character vectors

Node pairs, specified as separate arguments of scalars, vectors, character vectors, or cell arrays of character vectors. Similarly located elements in `s` and `t` specify the source and target nodes for edges in the graph. Reversing the specified edges must not produce duplicate edges in the resulting graph.

Example: `H = flipedge(G,[1 4],[2 3])` reverses the direction of the edges (1,2) and (4,3).

Example: `H = flipedge(G,{'a' 'd'},{'b' 'c'})` reverses the direction of the edges (a,b) and (d,c).

`idx` — Edge indices

scalar | vector

Edge indices, specified as a scalar or vector of positive integers. Each edge index corresponds to a row in the `G.Edges` table of the graph `G.Edges(idx,:)`. Reversing the specified edges must not produce duplicate edges in the resulting graph.

Example: `H = flipedge(G,3)` flips the direction of edge `G.Edges(3,:)`.

Output Arguments

`H` — Output graph

`digraph` object

Output graph, returned as a `digraph` object. Compared to `G`, `H` has the same nodes but some or all of the edges are in reversed direction. `H` also has the same node and edge properties as `G`.

See Also

See Also

`addedge` | `digraph` | `findedge` | `rmedge`

Topics

"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"

Introduced in R2016b

indegree

In-degree of nodes

Syntax

```
D = indegree(G)
D = indegree(G,nodeIDs)
```

Description

`D = indegree(G)` returns a column vector containing the in-degree of each node in `G`.

`D = indegree(G,nodeIDs)` returns the in-degree of the nodes specified by `nodeIDs`.

Examples

In-degree of All Graph Nodes

Create and plot a directed graph, and then compute the in-degree of every node in the graph. The in-degree of a node is equal to the number of edges with that node as the target.

```
s = [1 3 2 2 4 5 1 2];
t = [2 2 4 5 6 6 6 6];
G = digraph(s,t);
plot(G)
```

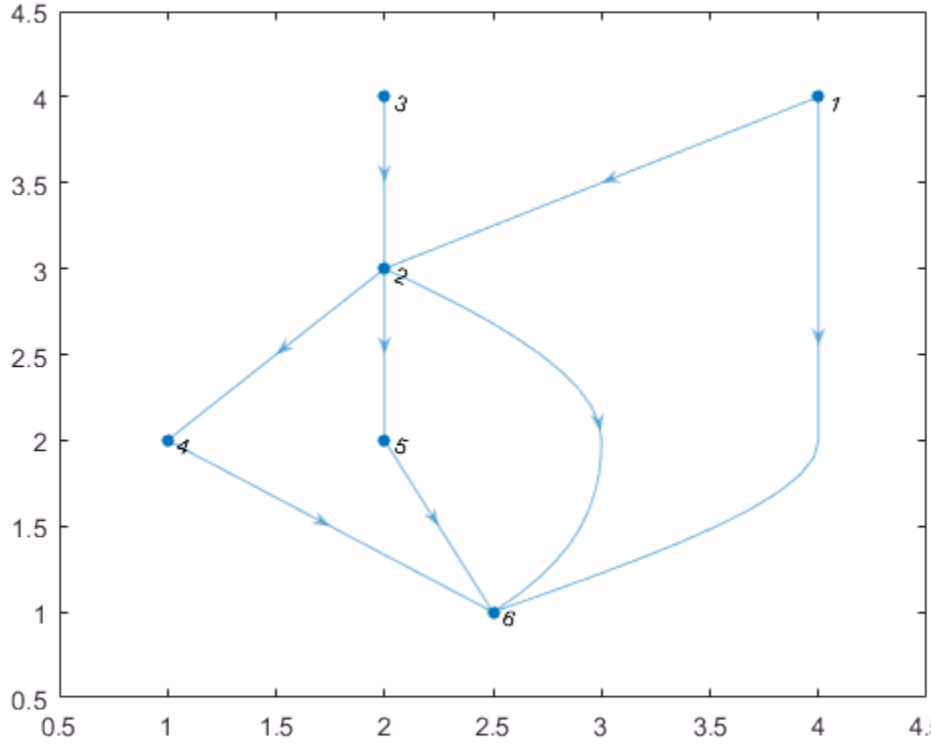


```
indeg = indegree(G)
```

```
indeg =

     0
     2
     0
     1
     1
     4
```

`indeg(j)` indicates the in-degree of node `j`.

In-degree of Subset of Graph Nodes

Create and plot a directed graph with named nodes. Then compute the number of edges that have the `'a'`, `'b'`, and `'f'` nodes as their target.

```
s = {'a' 'c' 'b' 'b' 'd' 'e' 'a' 'b'};
t = {'b' 'b' 'd' 'e' 'f' 'f' 'f' 'f'};
G = digraph(s,t);
plot(G)
```

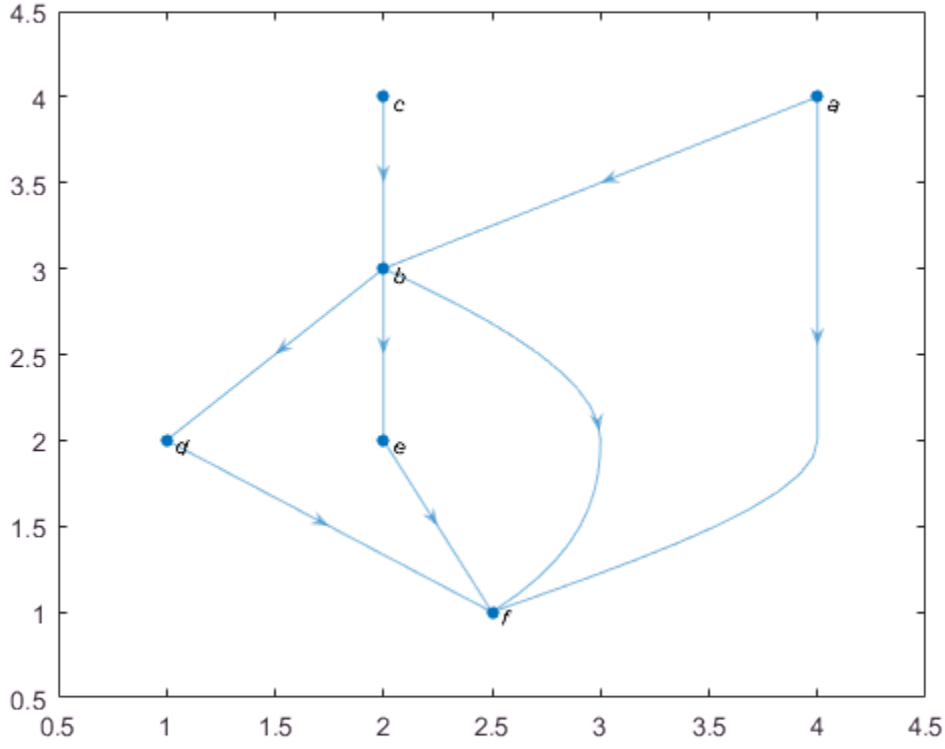


```
nodeID = {'a' 'b' 'f'}';
```

```
indeg = indegree(G,nodeID)
```

```
indeg =

     0
     2
     4
```

`indeg(j)` indicates the in-degree of node `nodeID(j)`.

Input Arguments

`G` — Input graph

`digraph` object

Input graph, specified as a `digraph` object. Use the `digraph` function to create a directed graph object. For more information, see digraph.

Example: `G = digraph([1 2],[2 3])`

`nodeIDs` — Node identifiers

scalar | vector | matrix | character vector | cell array of character vectors

Node identifiers, specified as a scalar node index, a vector or matrix of numeric node indices, a character vector node name, or a cell array of character vectors containing node names. You can refer to the nodes either by their numeric node index or by their node names.

Output Arguments

`D` — In-degree of nodes

array

In-degree of nodes, returned as a numeric array. `D` is a column vector unless you specify `nodeIDs`, in which case `D` has the same size as `nodeIDs`.

The in-degree of a graph node is equal to the number of predecessors, such that `indegree(G,ind) == length(predecessors(G,ind))`.

See Also

See Also

`digraph` | `outdegree` | `predecessors`

Topics

digraph

Introduced in R2015b

isdag

Determine if graph is acyclic

Syntax

```
tf = isdag(G)
```

Description

`tf = isdag(G)` returns logical `1` (`true`) if `G` is a directed acyclic graph; otherwise, it returns logical `0` (`false`).

Examples

Determine if Directed Graph is Acyclic

Create and plot a directed graph, and then test the graph to determine if it is acyclic.

```
s = [1 1 2 2 3 3 4 4 4 5];
t = [2 3 4 5 6 7 8 9 10 4];
G = digraph(s,t)
```

```
G = 
  digraph with properties:

    Edges: [10×1 table]
    Nodes: [10×0 table]
```

```
plot(G)
```

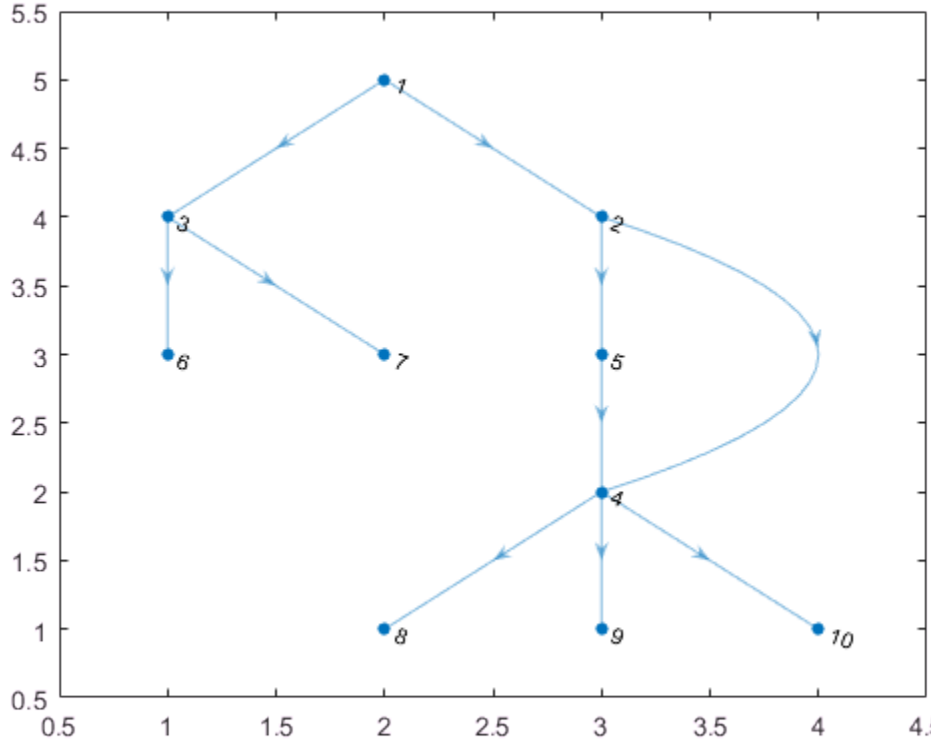


```
tf = isdag(G)
```

```
tf = logical
   1
```

Input Arguments

G — Input graph
`digraph` object

Input graph, specified as a `digraph` object. Use the `digraph` function to create a directed graph object. For more information, see digraph.

Example: `G = digraph([1 2],[2 3])`

Definitions

Directed Acyclic Graph (DAG)

A directed graph is acyclic if it contains no cycles. That is, starting at any node in the graph, no sequence of edges exists that can be followed to loop back to that starting node. As a result, directed acyclic graphs do not contain any self-loops.

See Also

See Also

`digraph` | `reordernodes` | `toposort`

Topics

digraph

Introduced in R2015b

outdegree

Out-degree of nodes

Syntax

```
D = outdegree(G)
D = outdegree(G,nodeIDs)
```

Description

`D = outdegree(G)` returns a column vector containing the out-degree of each node in `G`.

`D = outdegree(G,nodeIDs)` returns the out-degree of the nodes specified by `nodeIDs`.

Examples

Out-degree of All Graph Nodes

Create and plot a directed graph, and then compute the out-degree of every node in the graph. The out-degree of a node is equal to the number of edges with that node as the source.

```
s = [1 3 2 2 4 5 1 2];
t = [2 2 4 5 6 6 6 6];
G = digraph(s,t);
plot(G)
```

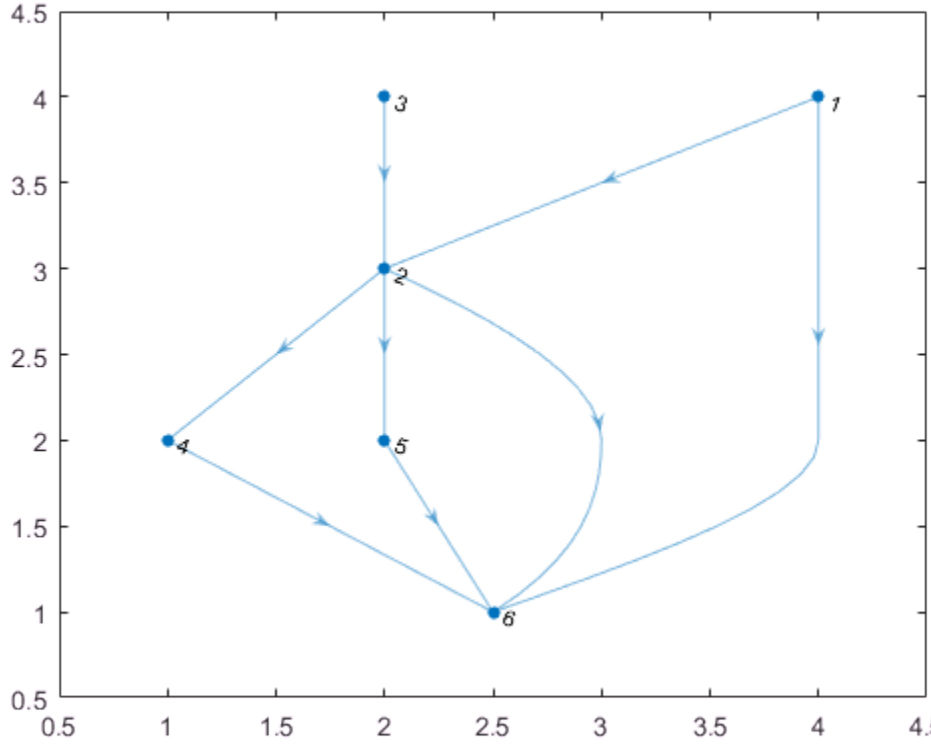


```
outdeg = outdegree(G)
```

```
outdeg =

     2
     3
     1
     1
     1
     0
```

`outdeg(j)` indicates the out-degree of node `j`.

Out-degree of Subset of Graph Nodes

Create and plot a directed graph with named nodes. Then compute the number of edges that have the `'a'`, `'b'`, and `'f'` nodes as their source.

```
s = {'a' 'c' 'b' 'b' 'd' 'e' 'a' 'b'};
t = {'b' 'b' 'd' 'e' 'f' 'f' 'f' 'f'};
G = digraph(s,t);
plot(G)
```

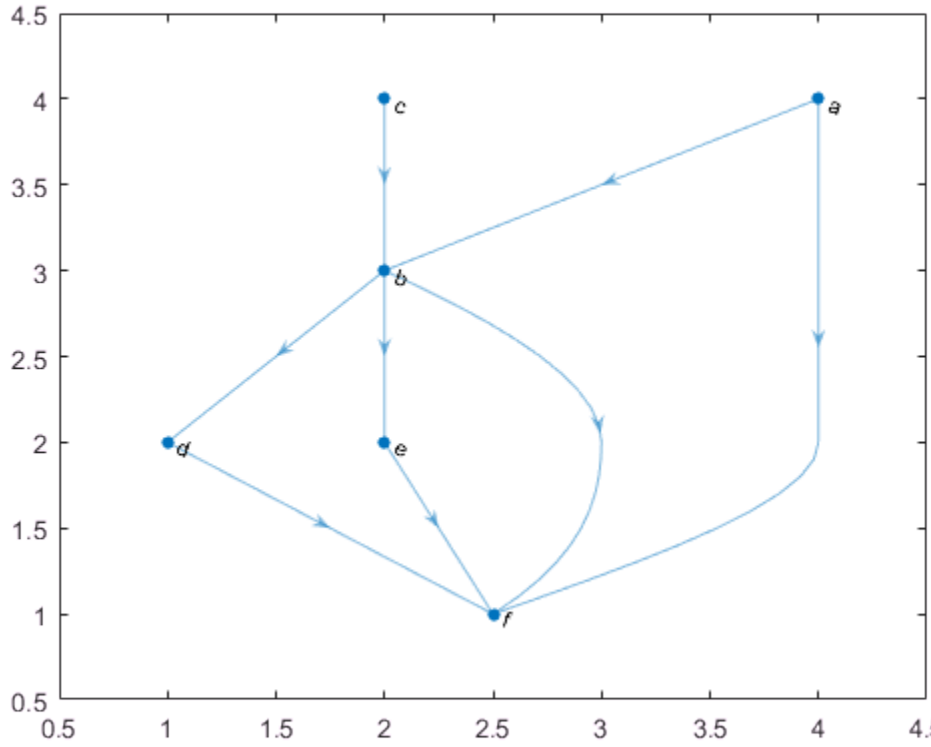


```
nodeID = {'a' 'b' 'f'}';
```

```
outdeg = outdegree(G,nodeID)
```

```
outdeg =

     2
     3
     0
```

`outdeg(j)` indicates the out-degree of node `nodeID(j)`.

Input Arguments

`G` — Input graph

`digraph` object

Input graph, specified as a `digraph` object. Use the `digraph` function to create a directed graph object. For more information, see digraph.

Example: `G = digraph([1 2],[2 3])`

`nodeIDs` — Node identifiers

scalar | vector | matrix | character vector | cell array of character vectors

Node identifiers, specified as a scalar node index, a vector or matrix of numeric node indices, a character vector node name, or a cell array of character vectors containing node names. You can refer to the nodes either by their numeric node index or by their node names.

Output Arguments

`D` — Out-degree of nodes

array

Out-degree of nodes, returned as a numeric array. `D` is a column vector unless you specify `nodeIDs`, in which case `D` has the same size as `nodeIDs`.

The out-degree of a graph node is equal to the number of successors, such that `outdegree(G,ind) == length(successors(G,ind))`.

See Also

See Also

`digraph` | `indegree` | `successors`

Topics

digraph

Introduced in R2015b

predecessors

Node predecessors

Syntax

```
preIDs = predecessors(G,nodeID)
```

Description

`preIDs = predecessors(G,nodeID)` returns the predecessor nodes of the node in directed graph `G` specified by `nodeID`. The predecessor nodes form directed edges with `preIDs` as the source nodes, and `nodeID` as the target node.

Examples

Node Predecessors

Create and plot a directed graph and determine the predecessor nodes of node `'e'`.

```
s = [1 1 1 2 2 3 3 7 8];
t = [2 3 4 5 6 7 8 5 5];
names = {'a' 'b' 'c' 'd' 'e' 'f' 'g' 'h'};
G = digraph(s,t,[],names);
plot(G)
```

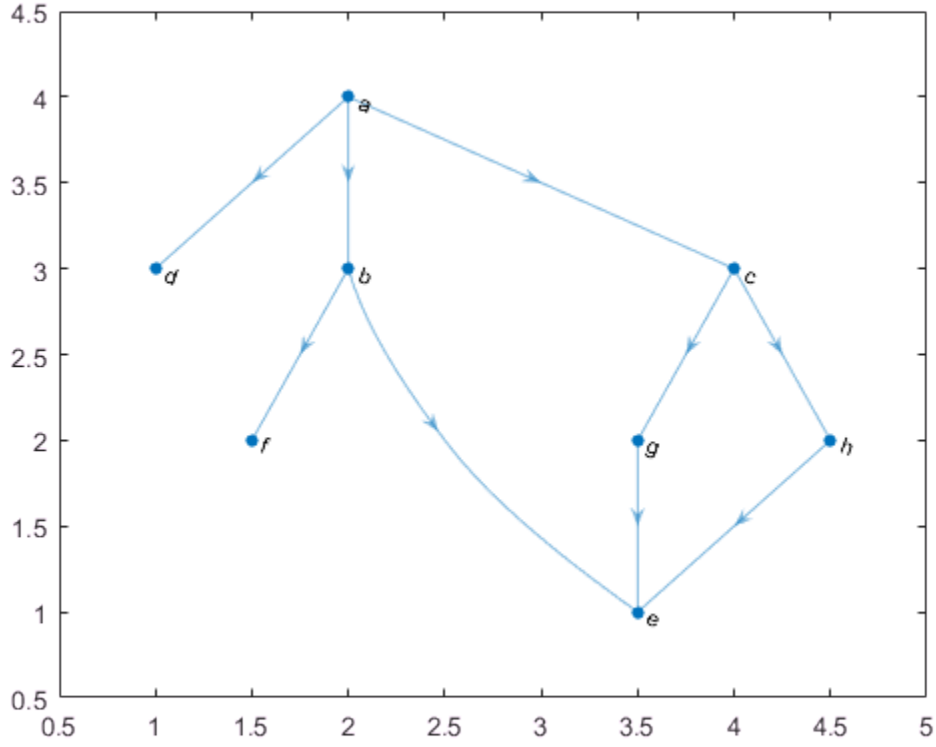


```
preIDs = predecessors(G,'e')
```

```
preIDs = 3×1 cell array
    'b'
    'g'
    'h'
```

Input Arguments

G — Input graph
digraph object

Input graph, specified as a `digraph` object. Use the `digraph` function to create a directed graph object. For more information, see digraph.

Example: `G = digraph([1 2],[2 3])`

`nodeID` — Node identifier
scalar | character vector

Node identifier, specified as a numeric scalar node index or a character vector node name.

Example: `preIDs = predecessors(G,3)` finds the predecessor nodes of node 3.

Output Arguments

`preIDs` — Predecessor node IDs
scalar | vector | cell array of character vectors

Predecessor node IDs, returned as a numeric scalar or column vector of node indices, or as a cell array of character vectors containing node names.

- If `nodeID` is a numeric node index, then `preIDs` contains numeric node indices.
- If `nodeID` is a node name, then `preIDs` contains node names.

See Also

See Also
`digraph` | `indegree` | `neighbors` | `successors`

Topics
digraph

Introduced in R2015b

successors

Node successors

Syntax

```
sucIDs = successors(G,nodeID)
```

Description

`sucIDs = successors(G,nodeID)` returns the successor nodes of the node in directed graph `G` specified by `nodeID`. The successor nodes form directed edges with `nodeID` as the source node, and `sucIDs` as the target nodes.

Examples

Node Successors

Create and plot a directed graph and determine the successor nodes of node `'a'`.

```
s = [1 1 1 2 2 3 3 7 8];
t = [2 3 4 5 6 7 8 5 5];
names = {'a' 'b' 'c' 'd' 'e' 'f' 'g' 'h'};
G = digraph(s,t,[],names);
plot(G)
```

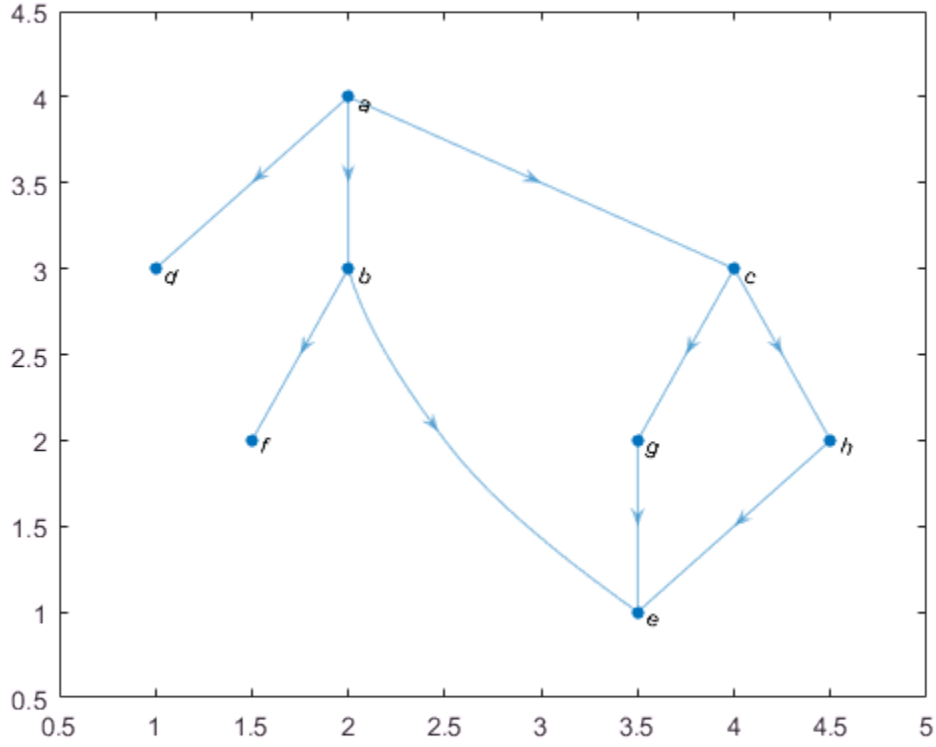


```
sucIDs = successors(G,'a')
```

```
sucIDs = 3×1 cell array
    'b'
    'c'
    'd'
```

Input Arguments

G — Input graph
digraph object

Input graph, specified as a `digraph` object. Use the `digraph` function to create a directed graph object. For more information, see digraph.

Example: `G = digraph([1 2],[2 3])`

`nodeID` — Node identifier

scalar | character vector

Node identifier, specified as a numeric scalar node index or a character vector node name.

Example: `sucIDs = successors(G,3)` finds the successor nodes of node 3.

Output Arguments

`sucIDs` — Successor node IDs

scalar | vector | cell array of character vectors

Successor node IDs, returned as a numeric scalar or column vector of node indices, or as a cell array of character vectors containing node names.

- If `nodeID` is a numeric node index, then `sucIDs` contains numeric node indices.
- If `nodeID` is a node name, then `sucIDs` contains node names.

See Also

See Also

`digraph` | `neighbors` | `outdegree` | `predecessors`

Topics

digraph

Introduced in R2015b

toposort

Topological order of directed acyclic graph

Syntax

```
n = toposort(G)
n = toposort(G,'Order',algorithm)
[n,H] = toposort(___)
```

Description

`n = toposort(G)` returns the topological order of the nodes in `G` such that `i < j` for every edge `(n(i),n(j))` in `G`. The directed graph `G` cannot have any cycles.

`n = toposort(G,'Order',algorithm)` specifies the ordering algorithm. For example, `toposort(G,'Order','stable')` uses a stable ordering algorithm based on the lexicographical order of the nodes.

`[n,H] = toposort(___)` additionally returns directed graph `H` whose nodes are in the given topological order. You can use any of the input argument combinations in previous syntaxes.

Examples

Topological Sort of Nodes

Create and plot a graph that represents a progression of university-level Mathematics courses. An edge between two courses signifies a course requirement.

```
A = [0 1 1 0 0 0 0
     0 0 0 1 0 0 0
     0 1 0 1 0 0 1
     0 0 0 0 1 1 0
     0 0 0 0 0 0 0
```

```
     0 0 0 0 1 0 0
     0 0 0 0 1 0 0];
names = {'Calculus I','Linear Algebra','Calculus II', ...
    'Multivariate Calculus','Topology', ...
    'Differential Equations','Real Analysis'};
G = digraph(A,names);
plot(G)
```

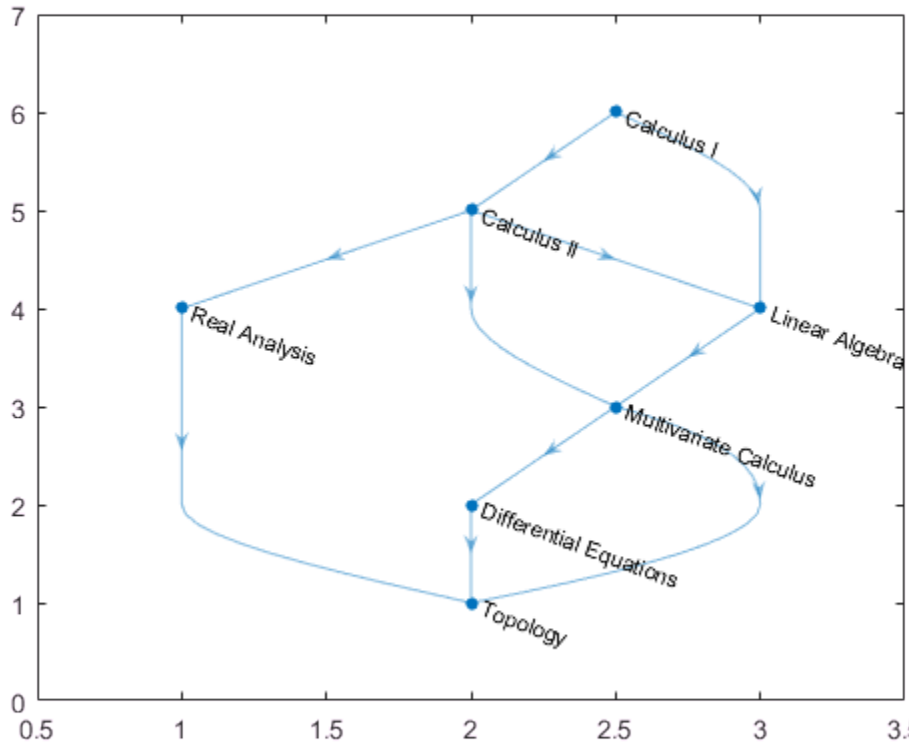

Find the topological sorting of the courses to determine the proper order in which they should be completed.

```
N = toposort(G)
```

```
N =
```

```
     1     3     7     2     4     6     5
```

```
G.Nodes.Name(N,:)
```

```
ans = 7×1 cell array
    'Calculus I'
    'Calculus II'
    'Real Analysis'
    'Linear Algebra'
    'Multivariate Calculus'
    'Differential Equations'
    'Topology'
```

Stable Topological Sort

Create a directed graph using a logical adjacency matrix, and then plot the graph.

```
rng default;
A = tril(sprand(10, 10, 0.3), -1)~=0;
G = digraph(A);
[~,G] = toposort(G);
plot(G)
```

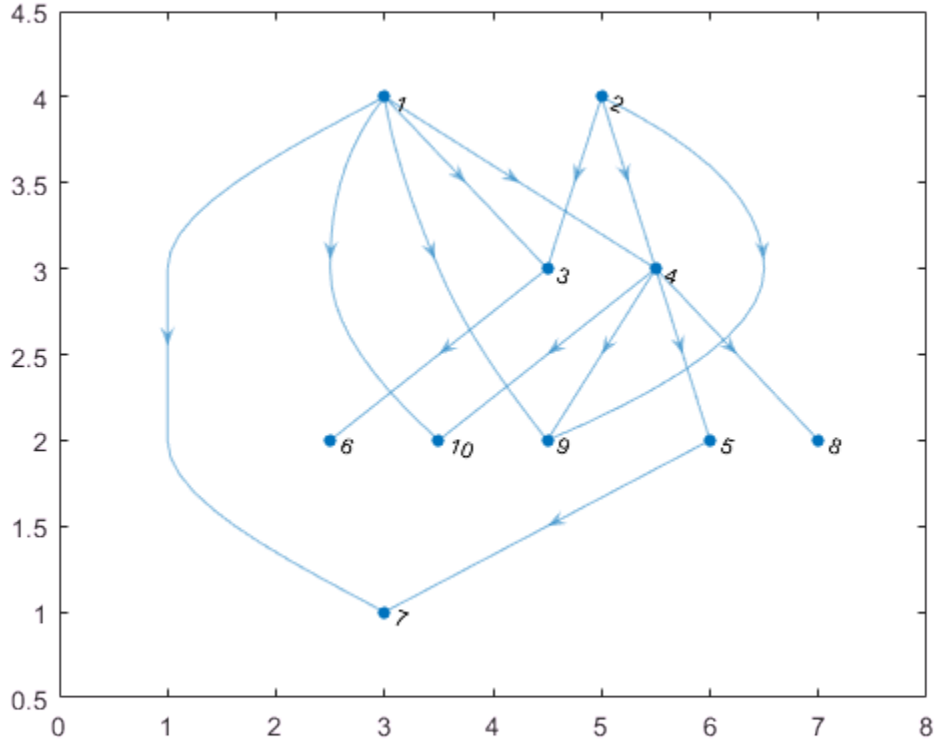

Find the topological sorting of the graph nodes. Even though `G` is already in topological order, `(1 2 3 4 5 6 7 8 9 10)`, `toposort` reorders the nodes.

```
toposort(G)
```

```
ans =

     2     1     4    10     9     8     5     7     3     6
```

Specify `Order` as `'stable'` to use the stable ordering algorithm, so that the sort orders the nodes with smaller indices first. Stable sort does not rearrange `G` if it is already in topological order.

```
toposort(G,'Order','stable')
```

```
ans =

     1     2     3     4     5     6     7     8     9    10
```

Input Arguments

G — Input graph

digraph object

Input graph, specified as a digraph object. G must be a directed acyclic graph. Use isdag to confirm that G does not contain cycles.

Use digraph to create a directed graph. For more information, see digraph.

Example: G = digraph([1 2],[2 3])

algorithm — Ordering algorithm

'fast' (default) | 'stable'

Ordering algorithm, specified as 'fast' or 'stable':

'fast' (default)	Based on a depth-first search. A node is added to the beginning of the list after considering all of its descendents. If G is already in topological order, this method might still reorder the nodes.
'stable'	Based on lexicographical order. n(1) is the node with smallest index, n(2) the next smallest given n(1), and so on. If G is in topological order then H is unchanged and n is 1:numnodes(G).

Example: [n,H] = toposort(G,'Order','stable')

Data Types: char

Output Arguments

n — Node indices
row vector

Node indices, returned as a row vector.

H — Topologically sorted graph
`digraph` object

Topologically sorted graph, returned as a `digraph` object. `H` is the same graph as `G`, but has the nodes reordered according to `n`.

Definitions

Topological Order

The topological ordering of a directed graph is an ordering of the nodes in the graph such that each node appears before its successors (descendents).

Consider a directed graph whose nodes represent tasks and whose edges represent dependencies that certain tasks must be completed before others. For such a graph, the topological sorting of the graph nodes produces a valid sequence in which the tasks could be performed.

See Also

See Also
`digraph` | `isdag` | `reordernodes`

Topics
digraph

Introduced in R2015b

transclosure

Transitive closure

Syntax

```
H = transclosure(G)
```

Description

`H = transclosure(G)` returns the transitive closure of graph `G` as a new graph, `H`. The nodes in `H` are the same as those in `G`, but `H` has additional edges. If there is a path from node `i` to node `j` in `G`, then there is an edge between node `i` and node `j` in `H`.

Examples

Transitive Closure of Graph

Create and plot a directed graph.

```
G = digraph([1 2 3 4 4 4 5 5 5 6 7 8],[2 3 5 1 3 6 6 7 8 9 9 9]);
plot(G)
```

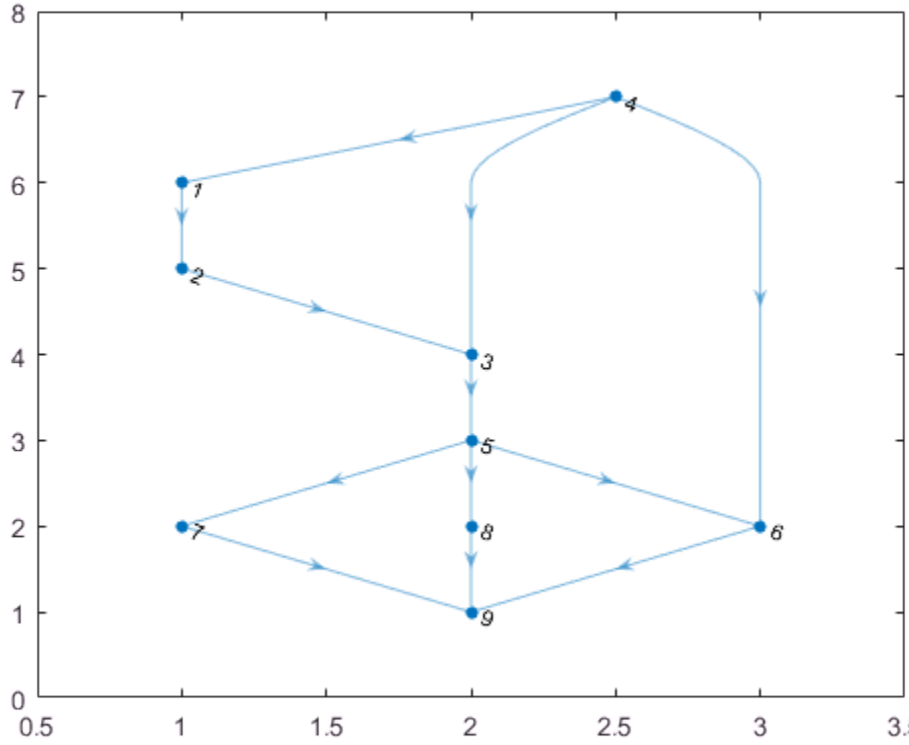

Find the transitive closure of graph `G` and plot the resulting graph. `H` contains the same nodes as `G`, but has additional edges.

```
H = transclosure(G);
plot(H)
```

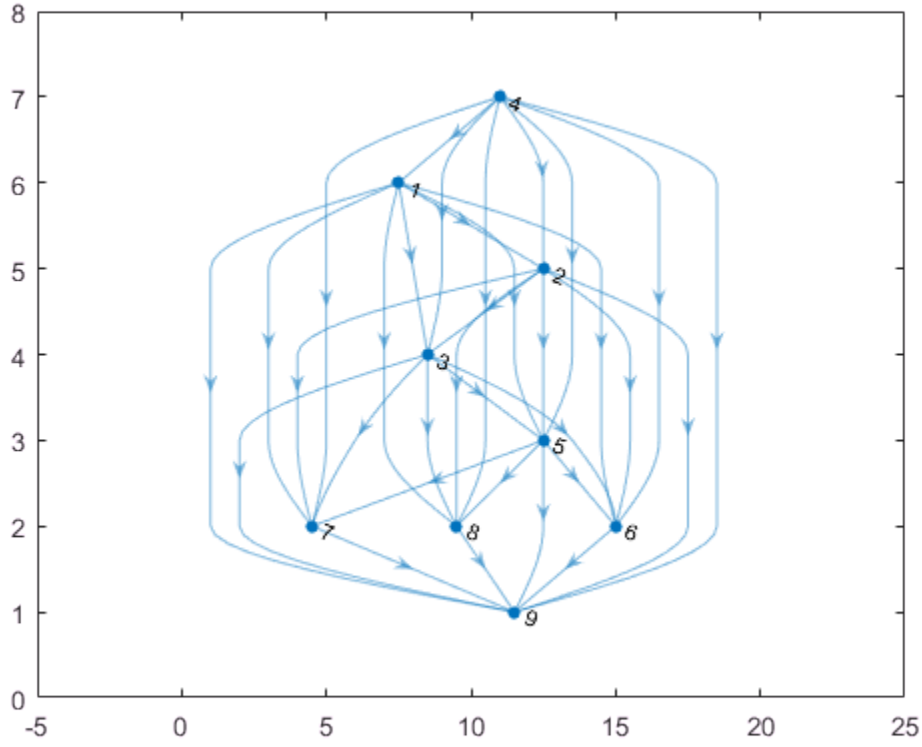

The transitive closure information in H can be used to answer reachability questions about the original graph, G.

Determine the nodes in G that can be reached from node 1. These nodes are the successors of node 1 in the transitive closure graph, H.

```
N = successors(H,1)
```

```
N =

     2
     3
     5
     6
```

```
7
8
9
```

Input Arguments

G — Input graph

digraph object

Input graph, specified as a digraph object. Use the digraph function to create a directed graph object. For more information, see digraph.

Example: G = digraph([1 2],[2 3])

Output Arguments

H — Transitive closure of G

digraph object

Transitive closure of G, returned as a digraph object. The table G.Nodes is copied to H, but any properties in G.Edges are dropped.

Use successors(H,n) to determine the nodes in G that are reachable from node n.

Definitions

Transitive Closure

The transitive closure of a graph describes the paths between the nodes. If there is a path from node i to node j in a graph, then an edge exists between node i and node j in the transitive closure of that graph. Thus, for a given node in the graph, the transitive closure turns any reachable node into a direct successor (descendent) of that node.

See Also

See Also

`conncomp` | `digraph` | `predecessors` | `successors` | `transreduction`

Topics

digraph

Introduced in R2015b

transreduction

Transitive reduction

Syntax

```
H = transreduction(G)
```

Description

`H = transreduction(G)` returns the transitive reduction of graph `G` as a new graph, `H`. The nodes in `H` are the same as those in `G`, but `H` has different edges. `H` contains the fewest number of edges such that if there is a path from node `i` to node `j` in `G`, then there is also a path from node `i` to node `j` in `H`.

Examples

Transitive Reduction of Complete Graph

Create and plot a complete graph of order four.

```
G = digraph([1 1 1 2 2 2 3 3 3 4 4 4],[2 3 4 1 3 4 1 2 4 1 2 3]);
plot(G)
```

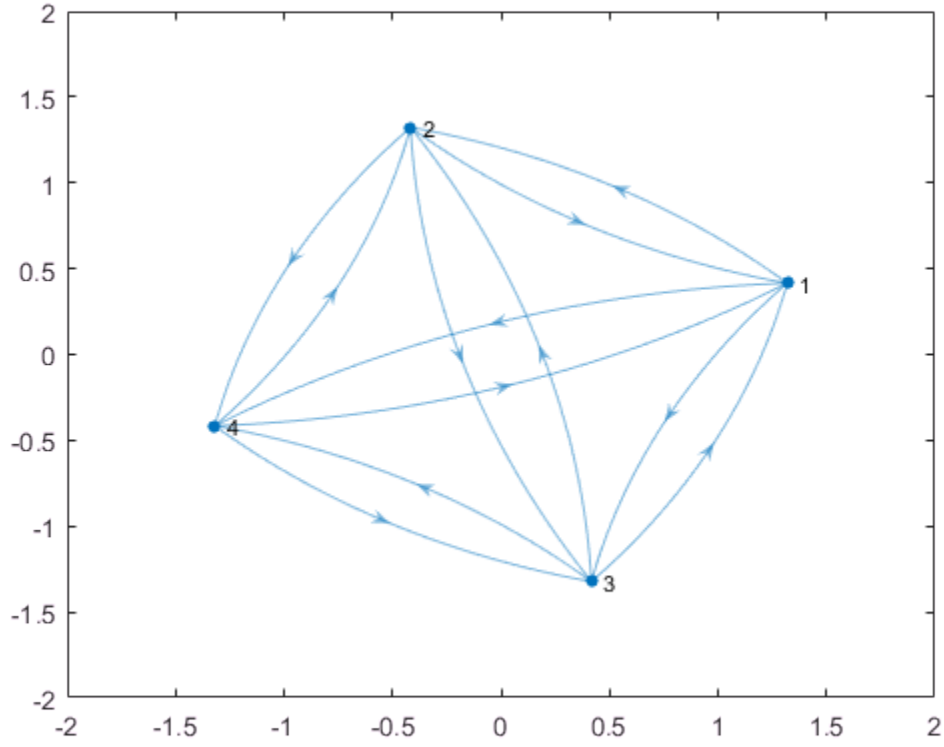

Find the transitive reduction and plot the resulting graph. Since the reachability in a complete graph is extensive, there are theoretically several possible transitive reductions, as any cycle through the four nodes is a candidate.

```
H = transreduction(G);
plot(H)
```

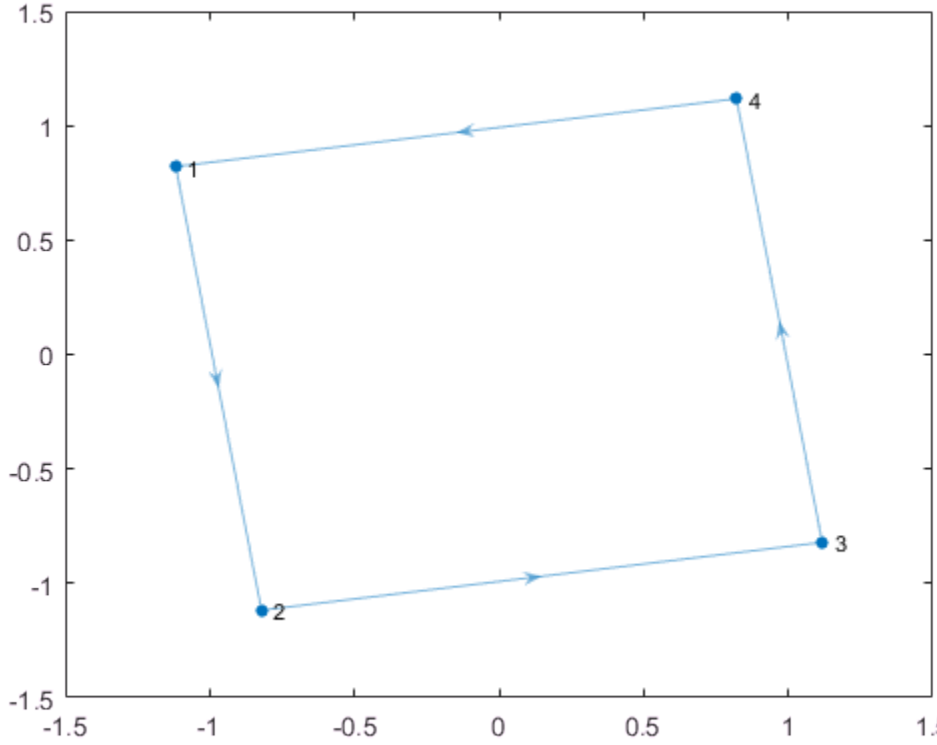

Two graphs with the same reachability also have the same transitive reduction. Therefore, any cycle of four nodes produces the same transitive reduction as H.

Create a directed graph that contains a different four node cycle: (1,3,4,2,1).

```
G1 = digraph([1 3 4 2],[3 4 2 1]);
plot(G1)
```

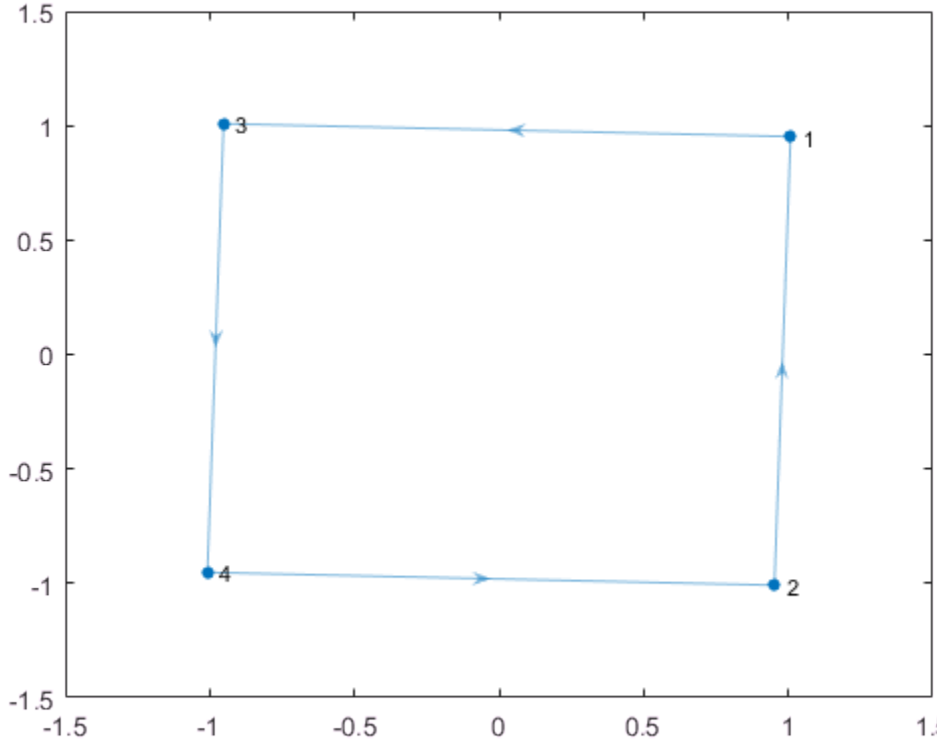

Find the transitive reduction of `G1`. The cycle in `G1` is reordered so that the transitive reductions `H` and `H1` have the same cycle, (1,2,3,4,1).

```
H1 = transreduction(G1);
plot(H1)
```

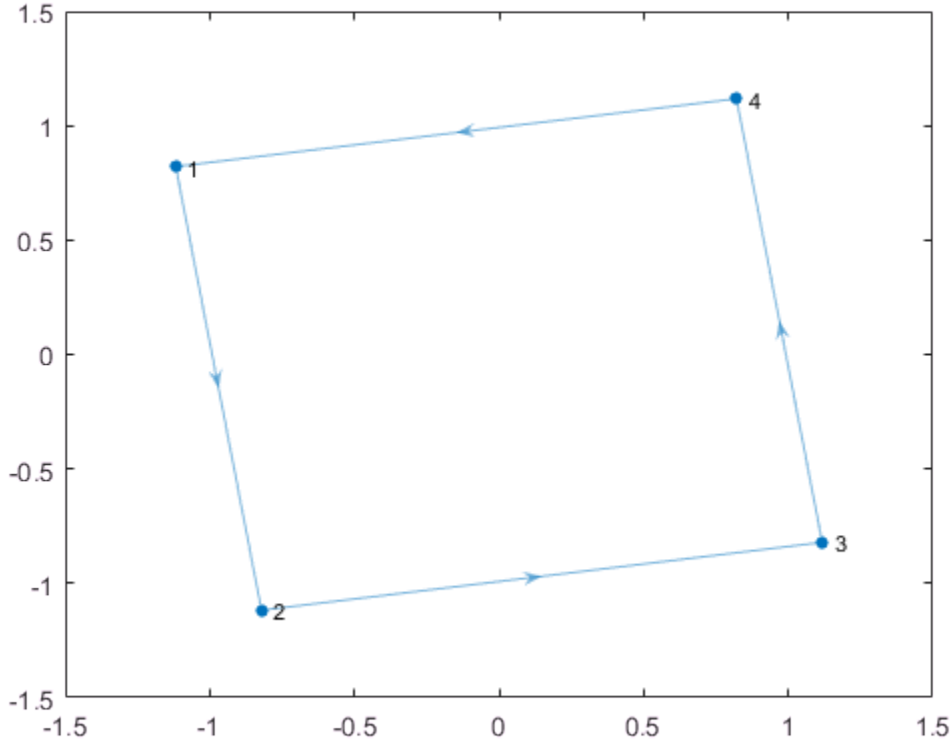

Unique Transitive Reduction

Create and plot a directed acyclic graph.

```
s = [1 1 1 1 2 3 3 4];
t = [2 3 4 5 4 4 5 5];
G = digraph(s,t);
plot(G)
```

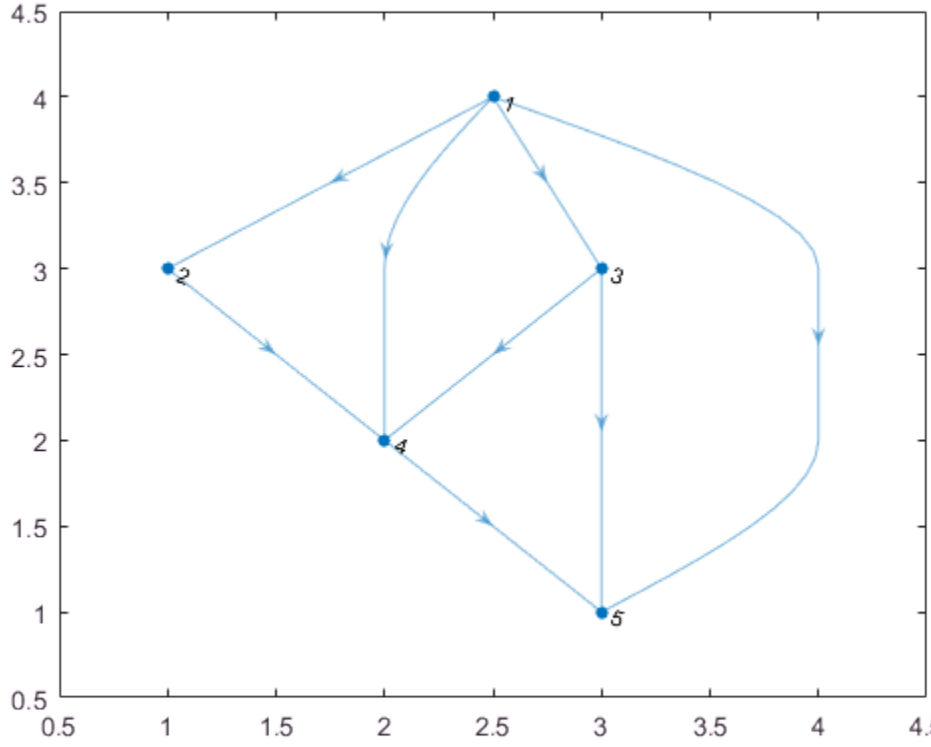

Confirm that G does not contain any cycles.

```
tf = isdag(G)
```

```
tf = logical
   1
```

Find the transitive reduction of the graph. Since the graph does not contain cycles, the transitive reduction is unique and is a subgraph of G.

```
H = transreduction(G);
plot(H)
```

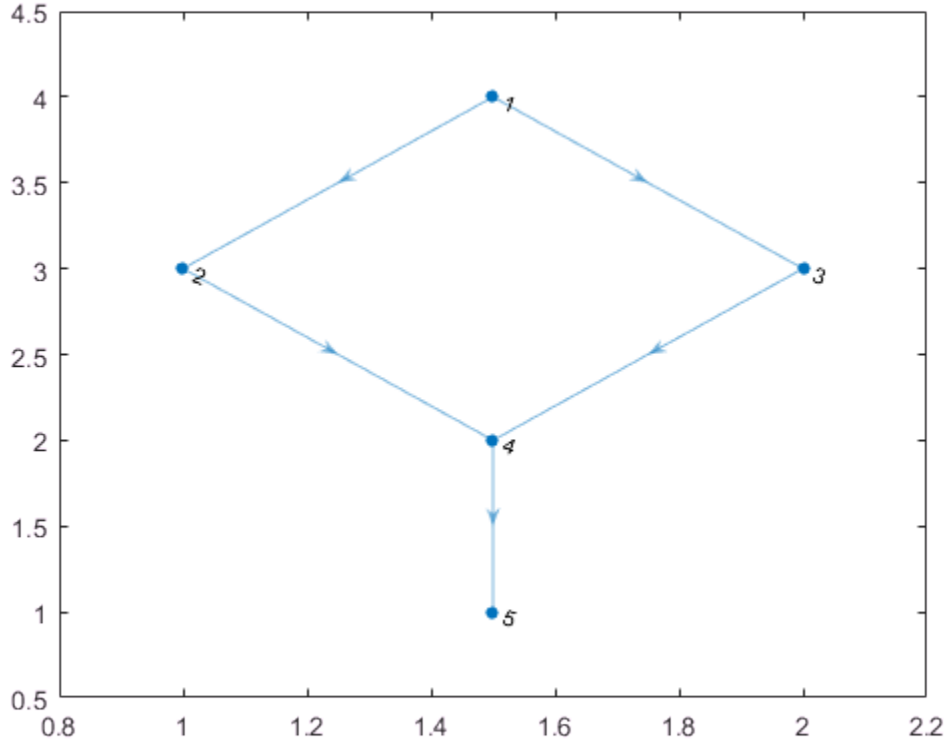

Input Arguments

G — Input graph

`digraph` object

Input graph, specified as a `digraph` object. Use the `digraph` function to create a directed graph object. For more information, see digraph.

Example: `G = digraph([1 2],[2 3])`

Output Arguments

H — Transitive reduction of G
`digraph` object

Transitive reduction of G, returned as a `digraph` object. The table `G.Nodes` is copied to H, but any properties in `G.Edges` are dropped. H might contain new edges not present in G.

H contains the fewest number of edges that still preserve the reachability of graph G. In other words, `transclosure(H)` is the same as `transclosure(G)`.

If `isdag(G)` is `true`, then H is unique and is a subgraph of G.

Definitions

Transitive Reduction

The transitive reduction of graph G is the graph with the fewest edges that still shares the same reachability as G. Therefore, of all the graphs that have the same transitive closure as G, the transitive reduction is the one with the fewest edges. If two directed graphs have the same transitive closure, they also have the same transitive reduction.

See Also

See Also
`conncomp` | `digraph` | `transclosure`

Topics
digraph

Introduced in R2015b

digraph

Create directed graph

Syntax

```
G = digraph
```

```
G = digraph(A)
G = digraph(A,nodenames)
G = digraph(A,___,'OmitSelfLoops')
```

```
G = digraph(s,t)
G = digraph(s,t,weights)
G = digraph(s,t,weights,nodenames)
G = digraph(s,t,weights,num)
G = digraph(s,t,___,'OmitSelfLoops')
```

```
G = digraph(EdgeTable)
G = digraph(EdgeTable,NodeTable)
G = digraph(EdgeTable,___,'OmitSelfLoops')
```

Description

`G = digraph` creates an empty directed graph object, `G`, which has no nodes or edges.

`G = digraph(A)` creates a weighted directed graph using a square adjacency matrix, `A`. The location of each nonzero entry in `A` specifies an edge for the graph, and the weight of the edge is equal to the value of the entry. For example, if `A(2,1) = 10`, then `G` contains an edge from node 2 to node 1 with a weight of 10.

`G = digraph(A,nodenames)` additionally specifies node names using the cell array of character vectors, `nodenames`. The number of elements in `nodenames` must be equal to `size(A,1)`.

`G = digraph(A,___,'OmitSelfLoops')` ignores the diagonal elements of `A` and returns a graph without any self-loops. You must specify `A`, and optionally can specify `nodenames`.

`G = digraph(s,t)` specifies directed graph edges `(s,t)` in pairs to represent the source and target nodes. `s` and `t` can be numeric, character vectors, or cell arrays of character vectors with the same number of elements.

`G = digraph(s,t,weights)` also specifies edge weights with the array, `weights`.

`G = digraph(s,t,weights,nodenames)` additionally specifies all node names using the cell array of character vectors, `nodenames`. The `s` and `t` inputs cannot contain node names that are not in `nodenames`.

`G = digraph(s,t,weights,num)` specifies the number of nodes in the graph with the numeric scalar `num`.

`G = digraph(s,t, ___ ,'OmitSelfLoops')` does not add any self-loops to the graph. That is, any `k` that satisfies `s(k) == t(k)` is ignored. You must specify `s` and `t` and optionally can specify `weights`, `nodenames`, or `num`.

`G = digraph(EdgeTable)` uses the table, `EdgeTable`, to define the graph. The first variable in `EdgeTable` must be `EndNodes`, and it must be a two-column array defining the edge list of the graph. `EdgeTable` can contain any number of other table variables to define attributes of the graph edges.

`G = digraph(EdgeTable,NodeTable)` additionally uses the table, `NodeTable`, to define attributes of the graph nodes. `NodeTable` can contain any number of table variables to define attributes of the graph nodes.

`G = digraph(EdgeTable, ___ ,'OmitSelfLoops')` does not add self-loops to the graph. That is, any `k` that satisfies `EdgeTable.EndNodes(k,1) == EdgeTable.EndNodes(k,2)` is ignored. You must specify `EdgeTable` and optionally can specify `NodeTable`.

Examples

Adjacency Matrix Graph Construction

Create a symmetric adjacency matrix, `A`, that creates a complete directed graph of order 4. Use a logical adjacency matrix to create a graph without weights.

```
A = ones(4) - diag([1 1 1 1])
```

```
A =

     0     1     1     1
     1     0     1     1
     1     1     0     1
     1     1     1     0
```

```
G = digraph(A~=0)
```

```
G =
  digraph with properties:

    Edges: [12×1 table]
    Nodes: [4×0 table]
```

View the edge list of the graph.

```
G.Edges
```

```
ans = 12×1 table
    EndNodes
    ________

    1    2
    1    3
    1    4
    2    1
    2    3
    2    4
    3    1
    3    2
    3    4
    4    1
    4    2
    4    3
```

Adjacency Matrix Construction with Node Names

Create an adjacency matrix.

```
A = magic(4);
```

```
A(A>10) = 0
```

```
A =

     0     2     3     0
     5     0    10     8
     9     7     6     0
     4     0     0     1
```

Create a graph with named nodes using the adjacency matrix. Specify `'OmitSelfLoops'` to ignore the entries on the diagonal of `A`.

```
names = {'alpha' 'beta' 'gamma' 'delta'};
G = digraph(A,names,'OmitSelfLoops')
```

```
G =
  digraph with properties:

    Edges: [8×2 table]
    Nodes: [4×1 table]
```

View the edge and node information.

```
G.Edges
```

```
ans = 8×2 table
         EndNodes          Weight
    ________________    ______

    'alpha'    'beta'      2
    'alpha'    'gamma'     3
    'beta'     'alpha'     5
    'beta'     'gamma'    10
    'beta'     'delta'     8
    'gamma'    'alpha'     9
    'gamma'    'beta'      7
    'delta'    'alpha'     4
```

```
G.Nodes
```

```
ans = 4×1 table
     Name
```

```
    _______

    'alpha'
    'beta'
    'gamma'
    'delta'
```

Edge List Graph Construction

Create and plot a cube graph using a list of the end nodes of each edge.

```
s = [1 1 1 2 2 3 3 4 5 5 6 7];
t = [2 4 8 3 7 4 6 5 6 8 7 8];
G = digraph(s,t)
```

```
G = 
  digraph with properties:

    Edges: [12×1 table]
    Nodes: [8×0 table]
```

```
plot(G,'Layout','force')
```

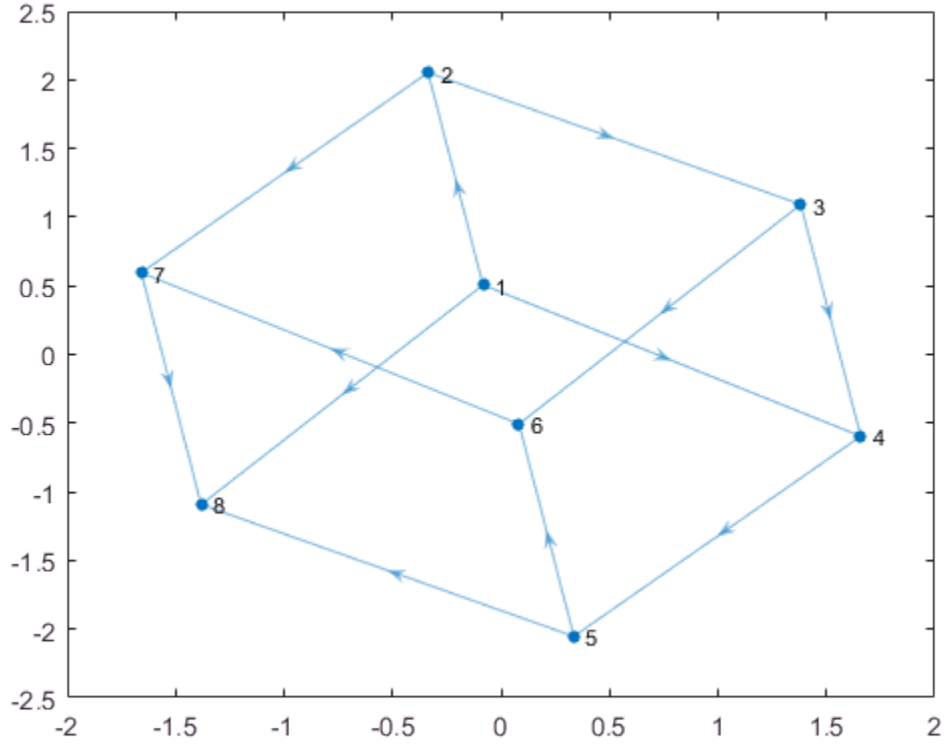

Edge List Graph Construction with Node Names and Edge Weights

Create and plot a cube graph using a list of the end nodes of each edge. Specify node names and edge weights as separate inputs.

```
s = [1 1 1 2 2 3 3 4 5 5 6 7];
t = [2 4 8 3 7 4 6 5 6 8 7 8];
weights = [10 10 1 10 1 10 1 1 12 12 12 12];
names = {'A' 'B' 'C' 'D' 'E' 'F' 'G' 'H'};
G = digraph(s,t,weights,names)
```

```
G =
  digraph with properties:
```

```
    Edges: [12×2 table]
    Nodes: [8×1 table]
```

```
plot(G,'Layout','force','EdgeLabel',G.Edges.Weight)
```

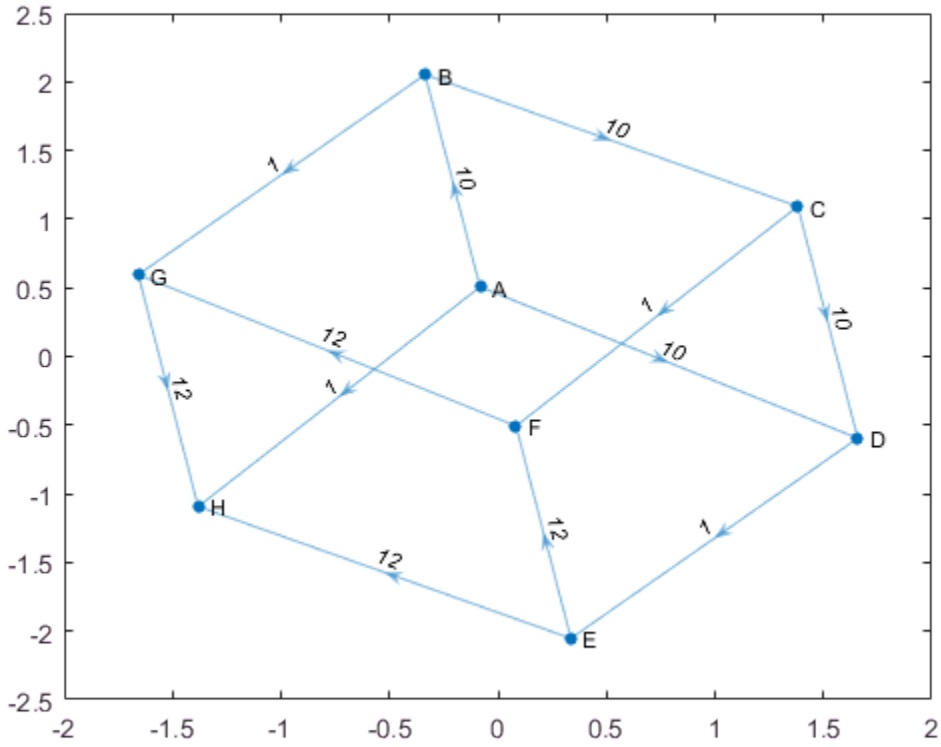

Edge List Construction with Extra Nodes

Create a weighted graph using a list of the end nodes of each edge. Specify that the graph should contain a total of 10 nodes.

```
s = [1 1 1 1 1];
```

```
t = [2 3 4 5 6];
weights = [5 5 5 6 9];
G = digraph(s,t,weights,10)
```

```
G 
  digraph with properties:

    Edges: [5×2 table]
    Nodes: [10×0 table]
```

Plot the graph. The extra nodes are disconnected from the primary connected component.

```
plot(G)
```

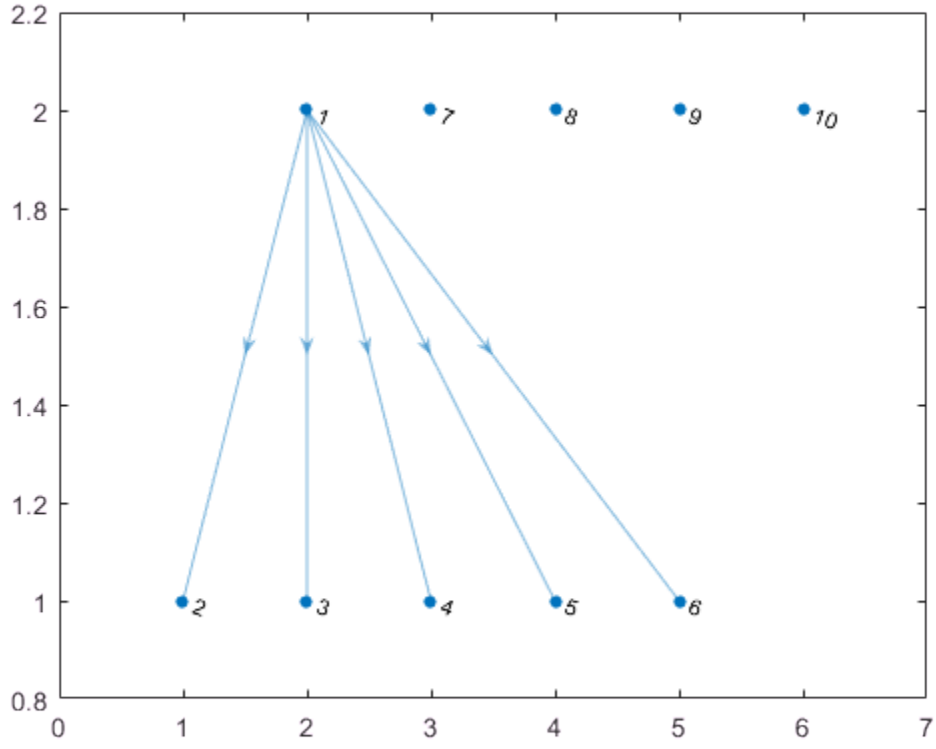

Add Nodes and Edges to Empty Graph

Create an empty digraph object, `G`.

```
G = digraph;
```

Add three nodes and three edges to the graph. The corresponding entries in `s` and `t` define the source and target nodes of the edges. `addedge` automatically adds the appropriate nodes to the graph if they are not already present.

```
s = [1 2 1];
t = [2 3 3];
G = addedge(G,s,t)
```

```
G = 
  digraph with properties:

    Edges: [3×1 table]
    Nodes: [3×0 table]
```

View the edge list. Each row describes an edge in the graph.

```
G.Edges
```

```
ans = 3×1 table
    EndNodes
    ________

    1    2
    1    3
    2    3
```

For the best performance, construct graphs all at once using a single call to `digraph`. Adding nodes or edges in a loop can be slow for large graphs.

Graph Construction with Tables

Create an edge table that contains the variables `EndNodes`, `Weight`, and `Code`. Then create a node table that contains the variables `Name` and `Country`. The variables in each table specify properties of the graph nodes and edges.

```
s = [1 1 1 2 2 3];
t = [2 3 4 3 4 4];
weights = [6 6.5 7 11.5 12 17]';
code = {'1/44' '1/49' '1/33' '44/49' '44/33' '49/33'}';
EdgeTable = table([s' t'],weights,code, ...
    'VariableNames',{'EndNodes' 'Weight' 'Code'})
```

```
EdgeTable = 6×3 table
    EndNodes    Weight     Code
    ________    ______    _______

    1    2         6      '1/44'
    1    3       6.5      '1/49'
    1    4         7      '1/33'
    2    3      11.5      '44/49'
    2    4        12      '44/33'
    3    4        17      '49/33'
```

```
names = {'USA' 'GBR' 'DEU' 'FRA'}';
country_code = {'1' '44' '49' '33'}';
NodeTable = table(names,country_code,'VariableNames',{'Name' 'Country'})
```

```
NodeTable = 4×2 table
    Name     Country
    _____    _______

    'USA'    '1'
    'GBR'    '44'
    'DEU'    '49'
    'FRA'    '33'
```

Create a graph using the node and edge tables. Plot the graph using the country codes as node and edge labels.

```
G = digraph(EdgeTable,NodeTable);
plot(G,'NodeLabel',G.Nodes.Country,'EdgeLabel',G.Edges.Code)
```

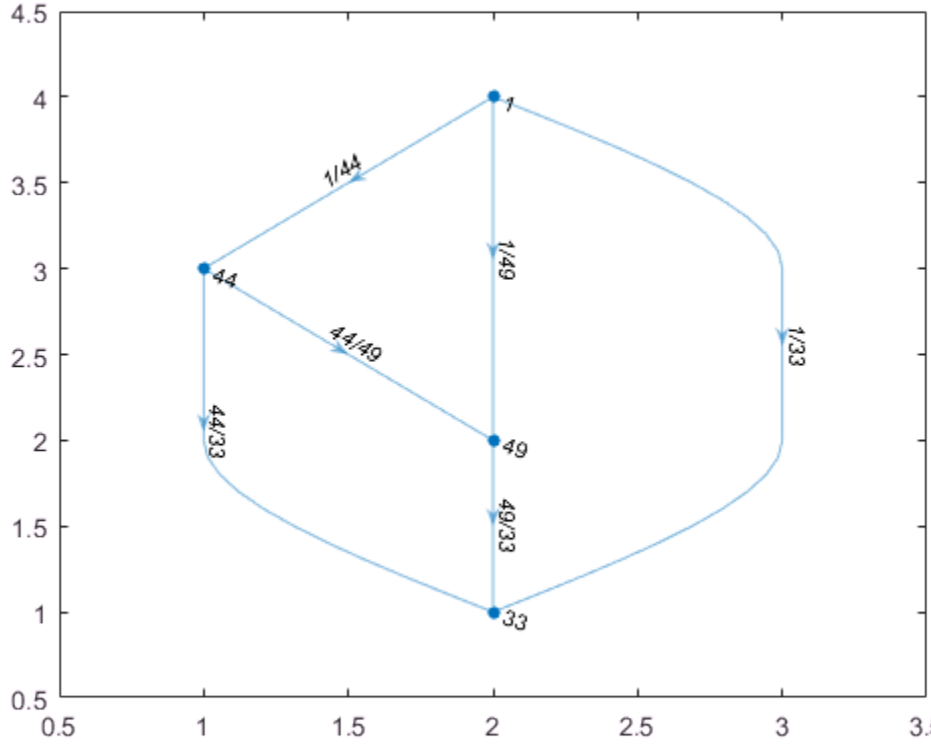

- "Build Watts-Strogatz Small World Graph Model"
- "Use PageRank Algorithm to Rank Websites"

Input Arguments

A — Adjacency matrix

matrix

Adjacency matrix, specified as a full or sparse, numeric matrix. The entries in A specify the network of connections (edges) between the nodes of the graph. The location of each

nonzero entry in A specifies an edge between two nodes. The value of that entry provides the edge weight. A logical adjacency matrix results in an unweighted graph.

Nonzero entries on the main diagonal of A specify *self-loops*, or nodes that are connected to themselves with an edge. Use the `'OmitSelfLoops'` input option to ignore diagonal entries.

Example: `A = [0 1 0; 0 0 0; 5 0 0]` describes a graph with three nodes and two edges. The edge from node 1 to node 2 has a weight of 1, and the edge from node 3 to node 1 has a weight of 5.

Data Types: `single` | `double` | `logical`

`nodenames` — Node names

cell array of character vectors

Node names, specified as a cell array of character vectors. `nodenames` must contain a nonempty, unique name for each node in the graph (its length must be equal to `numnodes(G)`).

Example: `G = digraph(A,{'n1','n2','n3'})` specifies three node names for a 3-by-3 adjacency matrix, A.

Data Types: `cell`

`s,t` — Source and target node pairs

scalars | vectors | matrices | multidimensional arrays | character vectors | cell arrays of character vectors

Source and target node pairs, specified as scalars, vectors, matrices, multidimensional arrays, character vectors, or cell arrays of character vectors. `digraph` creates directed edges between the corresponding nodes in `s` and `t`, which must both be numeric, or both be character vectors or cell arrays of character vectors. In each case, `s` and `t` must have the same number of elements.

- If `s` and `t` are numeric, then they correspond to indices of graph nodes. Numeric node indices must be positive integers greater than or equal to 1.
- If `s` and `t` are character vectors or cell arrays of character vectors, then they specify names for the nodes. The `Nodes` property of the graph is a table containing a `Name` variable with the node names, `G.Nodes.Name`.
- `s` and `t` cannot specify duplicate edges. For directed graphs, `digraph([1 2],[2 1])` specifies two unique edges, but `digraph([1 1],[2 2])` specifies a duplicate edge with node 1 as the source and node 2 as the target.

Example: `G = digraph([1 2 3],[2 4 5])` creates a graph with five nodes and three edges.

Example: `G = digraph({'Boston' 'New York' 'Washington D.C.'},{'New York' 'New Jersey' 'Pittsburgh'})` creates a graph with five named nodes and three edges.

`weights` — Edge weights

scalar | vector | matrix | multidimensional array

Edge weights, specified as a scalar, vector, matrix, or multidimensional array. `weights` can be a scalar or an array with the same number of elements as `s` and `t`.

`digraph` stores the edge weights as a `Weight` variable in the `G.Edges` property table. To add or change weights after creating a graph, you can modify the table variable directly, for example, `G.Edges.Weight = [25 50 75]'`.

Example: `G = digraph([1 2],[2 3],[100 200])` creates a graph with three nodes and two edges. The edges have weights of 100 and 200.

Data Types: `single` | `double`

`num` — Number of graph nodes

positive scalar integer

Number of graph nodes, specified as a positive scalar integer. `num` must be greater than or equal to the largest elements in `s` and `t`.

Example: `G = digraph([1 2],[2 3],[],5)` creates a graph with three connected nodes and two isolated nodes.

`EdgeTable` — Table of edge information

table

Table of edge information. The first variable in `EdgeTable` is required to be a two-column matrix called `EndNodes`, but you can have any number of other variables to describe attributes of the graph edges. For edge weights, use the variable `Weight`, since this table variable name is used by some graph functions. If there is a variable `Weight`, then it must be a numeric column vector. See `table` for more information on constructing a table.

After creating a graph, query the edge information table using `G.Edges`.

Example: `EdgeTable = table([1 2; 2 3; 3 5; 4 5],'VariableNames',{'EndNodes'})`

Data Types: `table`

`NodeTable` — Table of node information
table

Table of node information. `NodeTable` can contain any number of variables to describe attributes of the graph nodes. For node names, use the variable `Name`, since this variable name is used by some graph functions. If there is a variable `Name`, then it must be a column cell array of nonempty, unique character vectors. See `table` for more information on constructing a table.

After the graph is created, query the node information table using `G.Nodes`.

Example: `NodeTable = table({'a'; 'b'; 'c'; 'd'},'VariableNames', {'Name'})`

Data Types: `table`

Output Arguments

`G` — Directed graph
`digraph` object

Directed graph, returned as a `digraph` object. For more information, see digraph.

See Also

See Also
`graph`

Topics
"Build Watts-Strogatz Small World Graph Model"
"Use PageRank Algorithm to Rank Websites"
graph
digraph
"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"

"Graph Plotting and Customization"

Introduced in R2015b

digraph

Graph with directed edges

Description

`digraph` objects represent directed graphs, which have directional edges connecting the nodes. After you create a `digraph` object, you can learn more about the graph by using the object functions to perform queries against the object. For example, you can add or remove nodes or edges, determine the shortest path between two nodes, or locate a specific node or edge.

```
G = digraph([1 1], [2 3])
e = G.Edges
G = addedge(G,2,3)
G = addnode(G,4)
plot(G)
```

Create Object

Use the `digraph` function to create a directed graph object.

For undirected graphs, use the `graph` function.

Properties

`Edges` — Edges of graph

table

Edges of graph, returned as a table. By default this is an `M`-by-`1` table, where `M` is the number of edges in the graph.

- To add new edge properties to the graph, create a new variable in the `Edges` table.
- To add or remove edges from the graph, use the `addedge` or `rmedge` object functions.

Example: `G.Edges` returns a table listing the edges in the graph

Example: `G.Edges.Weight` returns a numeric vector of the edge weights.

Example: `G.Edges.Weight = [10 20 30 55]'` specifies new edge weights for the graph.

Example: `G.Edges.NormWeight = G.Edges.Weight/sum(G.Edges.Weight)` adds a new edge property to the table containing the normalized weights of the edges.

Data Types: `table`

`Nodes` — Nodes of graph

table

Nodes of graph, returned as a table. By default this is an empty `N`-by-`0` table, where `N` is the number of nodes in the graph.

- To add new node properties to the graph, create a new variable in the `Nodes` table.
- To add or remove nodes from the graph, use the `addnode` or `rmnode` object functions.

Example: `G.Nodes` returns a table listing the node properties of the graph. This table is empty by default.

Example: `G.Nodes.Names = {'Montana', 'New York', 'Washington', 'California'}'` adds node names to the graph by adding the variable `Names` to the `Nodes` table.

Example: `G.Nodes.WiFi = logical([1 0 0 1 1]')` adds the variable `WiFi` to the `Nodes` table. This property specifies that certain airports have wireless internet coverage.

Data Types: `table`

Object Functions

Access and Modify Nodes and Edges

addedge	Add new edge to graph
rmedge	Remove edge from graph
flipedge	Reverse edge directions
addnode	Add new node to graph
rmnode	Remove node from graph
findedge	Locate edge in graph
findnode	Locate node in graph

numedges	Number of edges in graph
numnodes	Number of nodes in graph
reordernodes	Reorder graph nodes
subgraph	Extract subgraph

Search and Structure

bfsearch	Breadth-first graph search
dfsearch	Depth-first graph search
centrality	Measure node importance
toposort	Topological order of directed acyclic graph
transclosure	Transitive closure
transreduction	Transitive reduction
isdag	Determine if graph is acyclic
conncomp	Connected graph components
condensation	Graph condensation
maxflow	Maximum flow in graph
isisomorphic	Determine whether two graphs are isomorphic
isomorphism	Compute equivalence relation between two graphs

Shortest Path

shortestpath	Shortest path between two single nodes
shortestpathtree	Shortest path tree from node
distances	Shortest path distances of all node pairs

Matrix Representation

adjacency	Graph adjacency matrix
incidence	Graph incidence matrix

Node Information

indegree	In-degree of nodes
outdegree	Out-degree of nodes
predecessors	Node predecessors
successors	Node successors
nearest	Nearest neighbors within radius

Visualization

plot	Graph plot

Examples

Create and Modify Digraph Object

Create a `digraph` object with three nodes and three edges. One edge is from node 1 to node 2, another is from node 1 to node 3, and the third is from node 2 to node 1.

```
G = digraph([1 1 2],[2 3 1])
```

```
G = 
  digraph with properties:

    Edges: [3×1 table]
    Nodes: [3×0 table]
```

View the edge table of the graph. For directed graphs, the first column indicates the source nodes of each edge, and the second column indicates the target nodes.

```
G.Edges
```

```
ans = 3×1 table
    EndNodes
    ________

    1     2
    1     3
    2     1
```

Add node names to the graph, then view the new node and edge tables. The source and target nodes of each edge are now expressed using their node names.

```
G.Nodes.Name = {'A' 'B' 'C'}';
G.Nodes
```

```
ans = 3×1 table
    Name
    ____

    'A'
    'B'
    'C'
```

```
G.Edges
```

```
ans = 3×1 table
     EndNodes
    __________

    'A'    'B'
    'A'    'C'
    'B'    'A'
```

You can add or modify extra variables in the `Nodes` and `Edges` tables to describe attributes of the graph nodes or edges. However, you cannot directly change the number of nodes or edges in the graph by modifying these tables. Instead, use the `addedge`, `rmedge`, `addnode`, or `rmnode` functions to modify the number of nodes or edges in a graph.

For example, add an edge to the graph between nodes 2 and 3 and view the new edge list.

```
G = addedge(G,2,3)
```

```
G = 
  digraph with properties:

    Edges: [4×1 table]
    Nodes: [3×1 table]
```

```
G.Edges
```

```
ans = 4×1 table
     EndNodes
    __________

    'A'    'B'
    'A'    'C'
    'B'    'A'
    'B'    'C'
```

See Also

See Also

`digraph` | `graph`

Topics

graph
"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"
"Graph Plotting and Customization"

Introduced in R2015b

dir

List folder contents

Syntax

```
dir
dir name
listing = dir(name)
```

Description

`dir` lists files and folders in the current folder.

`dir name` lists files and folders that match `name`. When `name` is a folder, `dir` lists the contents of the folder. Specify `name` using absolute or relative path names. The `name` argument can include the `*` wildcard in the file name, and both the `*` and the `**` wildcard in the path name. Characters next to a `**` wildcard must be file separators.

`listing = dir(name)` returns attributes about `name`.

Examples

View Contents of Folder

List the contents of a folder.

Create a folder, `myfolder`, that contains the files `myfile1.m`, `myfile2.m`, and `myfile3.m`.

```
mkdir myfolder
movefile myfile1.m myfolder
movefile myfile2.m myfolder
movefile myfile3.m myfolder
```

List the files in `myfolder`.

```
dir myfolder
```

```
.           ..          myfile1.m  myfile2.m  myfile3.m
```

Find Files Matching Specified Name

List all files with a `.m` extension that contain the term `my`.

Create a folder, `myfolder`, that contains the files `myfile1.m`, `myfile2.m`, and `myfile3.txt`.

```
mkdir myfolder
movefile myfile1.m myfolder
movefile myfile2.m myfolder
movefile myfile3.txt myfolder
```

List the matching files in `myfolder`.

```
cd myfolder
dir *my*.m
```

```
myfile1.m  myfile2.m
```

Find Files in Subfolders

List all files in the current folder and all of the subfolders of the current folder.

Create a folder, `myfolder1`, that contains these files and folders:

```
myfile1.m
myfolder2
     myfile2.m
     myfolder3.m
         myfile3.m

mkdir myfolder1
mkdir myfolder1/myfolder2
mkdir myfolder1/myfolder2/myfolder3

movefile myfile1.m myfolder1
movefile myfile2.m myfolder1/myfolder2
```

```
movefile myfile3.m myfolder1/myfolder2/myfolder3
```

List all files with a `.m` extension in `myfolder1` and all of the subfolders of `myfolder1`.

```
cd myfolder1
dir **/*.m
```

```
Files Found in Current Folder:

myfile1.m

Files Found in: myfolder2

myfile2.m

Files Found in: myfolder2\myfolder3

myfile3.m
```

Find Information in the Return Structure

Return the folder listing of `myfolder` to the variable `MyFolderInfo`.

Create a folder, `myfolder`, that contains the files `myfile1.m`, `myfile2.m`, and `myfile3.m`.

```
mkdir myfolder
movefile myfile1.m myfolder
movefile myfile2.m myfolder
movefile myfile3.m myfolder
```

Get a list of the files in `myfolder`. MATLAB returns the information in a structure array.

```
MyFolderInfo = dir('myfolder')
```

```
MyFolderInfo =

  5×1 struct array with fields:

    name
    folder
    date
```

```
    bytes
    isdir
    datenum
```

Index into the structure to access a particular item.

```
MyFolderInfo(3).name
```

```
ans =

    'myfile1.m'
```

Find Date File Last Modified

Get the serial date number for the date and time a file was last modified.

Use the `datenum` field of the structure returned by the `dir` command. Do not use the `datenum` function to convert the `date` field of the structure to a number. The results of the `datenum` function vary depending on the locale. Instead, use the `datenum` field.

```
MyFileInfo = dir('myfile1.m');
FileDate = MyFileInfo.datenum
```

```
FileDate =

   7.3647e+05
```

Input Arguments

`name` — Name of file or folder

character vector

Name of a file or folder, specified as a character vector. To search for multiple files, use wildcards in the file name. For example, `dir *.txt` lists all files with a `txt` extension in the current folder. To search through folders and subfolders on the path recursively, use wildcards in the path name. For example, `dir */*.txt` lists all files with a `txt` extension exactly one folder under the current folder, and `dir **/*.txt` lists all files

with a `txt` extension zero or more folders under the current folder. Characters next to a `**` wildcard must be file separators.

Note: MATLAB always treats the `*` character as a wildcard, even on file systems that support `*` in file names.

The MATLAB `dir` function is consistent with the Microsoft Windows operating system `dir` command in that both support short file names generated by DOS.

Output Arguments

`listing` — File attributes

structure array

File attributes, returned as a `n`-by-1 structure array, where `n` is the number of files and folders returned by the `dir` command.

This table shows the fields in the structure.

Field Name	Description	Class
`name`	File or folder name	`char`
`folder`	Location of file or folder	`char`
`date`	Modification date timestamp	`char`
`bytes`	Size of the file in bytes	`double`
`isdir`	`1` if name is a folder; `0` if name is a file	`logical`
`datenum`	Modification date as serial date number.	`double`

Tips

- To exclude invalid entries returned by the `dir` command, use the `cellfun` function.

  ```
  MyFolderInfo = dir;
  ```

```
MyFolderInfo = MyFolderInfo(~cellfun('isempty', {MyFolderInfo.date}));
```

Invalid entries occur when you run `dir` with an output argument and the results include a nonexistent file or a file that `dir` cannot query for some other reason. In this case, `dir` returns the following default values.

```
date: ''
bytes: []
isdir: 0
datenum: []
```

Invalid entries most commonly occur on UNIX platforms when `dir` queries a symbolic link pointing to a nonexistent target. A nonexistent target is a target that is moved, removed, or renamed.

- To obtain a list of available drives on Microsoft Windows platforms, use the DOS `net use` command at the command line.

  ```
  dos('net use')
  ```

  Or type

  ```
  [s,r] = dos('net use')
  ```

  MATLAB returns the results to the character array `r`.

See Also

See Also

`cd` | `fileattrib` | `isdir` | `ls` | `mkdir` | `rmdir` | `what`

Topics

"Specify File Names"

Introduced before R2006a

dir

Class: FTP

View contents of folder on FTP server

Syntax

```
dir(ftpobj)
dir(ftpobj,folder)
details = dir(ftpobj,folder)
```

Description

`dir(ftpobj)` lists the files in current folder on the FTP server associated with `ftpobj`.

`dir(ftpobj,folder)` lists the files in the specified folder.

`details = dir(ftpobj,folder)` returns the results in a structure array that contains the name, modification date, and size of each file.

Input Arguments

ftpobj

FTP object created by ftp.

folder

Character vector enclosed in single quotation marks that specifies the target folder. To specify the folder above the current one, use `'..'`.

Output Arguments

details

`m`-by-1 structure array, where `m` is the number of files in the folder. Each element of the structure array contains the following fields:

Field Name	Description	Data Type
`name`	File name	`char`
`date`	Modification date timestamp	`char`
`bytes`	Number of bytes allocated to the file	`double`
`isdir`	If a folder, `isdir` = `1`, otherwise `isdir` = `0`	`logical`
`datenum`	Modification date as serial date number	`char`

Examples

Connect to the National Geophysical Data Center (NGDC) FTP server and view the contents:

```
ngdc = ftp('ftp.ngdc.noaa.gov');
dir(ngdc)
```

This code returns:

```
DMSP                          Solid_Earth                   international            wdc
INDEX.txt                     ftp.html                      ionosonde
README.txt                    geomag                        mgg
STP                           hazards                       pub
Snow_Ice                      index.html                    tmp
```

Continuing the previous example, save the folder contents to the structure `n`, close the connection, and view details about the `pub` subfolder:

```
n = dir(ngdc);
close(ngdc);

n(14)
```

This code returns:

```
ans =
```

```
       name: 'pub'
      bytes: 9
      isdir: 1
       date: '12-Dec-2014 21:22:00'
    datenum: 7.3595e+05
```

FTP service courtesy of the NGDC. See NGDC Privacy Policy, Disclaimer, and Copyright for NGDC terms of service.

See Also

cd | ftp | rmdir | mkdir

Introduced before R2006a

discretize

Group data into bins or categories

Syntax

```
Y = discretize(X,edges)
[Y,E] = discretize(X,N)
[Y,E] = discretize(X,dur)
[ ___ ] = discretize( ___ ,values)

[ ___ ] = discretize( ___ ,'categorical')
[ ___ ] = discretize( ___ ,'categorical',displayFormat)
[ ___ ] = discretize( ___ ,'categorical',categoryNames)

[ ___ ] = discretize( ___ ,'IncludedEdge',side)
```

Description

`Y = discretize(X,edges)` returns the indices of the bins that contain the elements of `X`. The `j`th bin contains element `X(i)` if `edges(j) <= X(i) < edges(j+1)` for `1 <= j < N`, where `N` is the number of bins and `length(edges) = N+1`. The last bin contains both edges such that `edges(N) <= X(i) <= edges(N+1)`.

`[Y,E] = discretize(X,N)` divides the range of `X` into `N` uniform bins, and also returns the bin edges `E`.

`[Y,E] = discretize(X,dur)`, where `X` is a datetime or duration array, divides `X` into uniform bins of `dur` length of time. `dur` can be a scalar `duration` or `calendarDuration`, or a unit of time. For example, `[Y,E] = discretize(X,'hour')` divides `X` into bins with a uniform duration of 1 hour.

`[ ___ ] = discretize( ___ ,values)` returns the corresponding element in `values` rather than the bin number, using any of the previous input or output argument combinations. For example, if `X(1)` is in bin 5, then `Y(1)` is `values(5)` rather than `5`. `values` must be a vector with length equal to the number of bins.

`[ ___ ] = discretize( ___ ,'categorical')` creates a categorical array where each bin is a category. In most cases, the default category names are of the form "`[A,B)`" (or

"[A,B]" for the last bin), where A and B are consecutive bin edges. If you specify dur as a character vector, then the default category names might have special formats. See Y for a listing of the display formats.

[___] = discretize(___ ,'categorical',displayFormat), for datetime or duration array inputs, uses the specified datetime or duration display format in the category names of the output.

[___] = discretize(___ ,'categorical',categoryNames) also names the categories in Y using the cell array of character vectors, categoryNames. The length of categoryNames must be equal to the number of bins.

[___] = discretize(___ ,'IncludedEdge',side), where side is 'left' or 'right', specifies whether each bin includes its right or left bin edge. For example, if side is 'right', then each bin includes the right bin edge, except for the *first* bin which includes both edges. In this case, the jth bin contains an element X(i) if edges(j) < X(i) <= edges(j+1), where 1 < j <= N and N is the number of bins. The first bin includes the left edge such that it contains edges(1) <= X(i) <= edges(2). The default for side is 'left'.

Examples

Group Data into Bins

Use discretize to group numeric values into discrete bins. edges defines five bin edges, so there are four bins.

```
data = [1 1 2 3 6 5 8 10 4 4]
```

```
data =

     1     1     2     3     6     5     8    10     4     4
```

```
edges = 2:2:10
```

```
edges =

     2     4     6     8    10
```

```
Y = discretize(data,edges)
```

```
Y =
```

```
   NaN   NaN     1     1     3     2     4     4     2     2
```

Y indicates which bin each element of data belongs to. Since the value 1 falls outside the range of the bins, Y contains NaN values for those elements.

Group Data into Specified Number of Bins

Group random data into three bins. Specify a second output to return the bin edges calculated by discretize.

```
X = randn(15,1);
[Y,E] = discretize(X,3)
```

```
Y =

     2
     2
     1
     2
     2
     1
     1
     2
     3
     2


E =

    -3     0     3     6
```

Group Datetime Data by Month

Create a 10-by-1 datetime vector with random dates in the year 2016. Then, group the datetime values by month and return the result as a categorical array.

```
X = datetime(2016,1,randi(365,10,1))
```

```
X = 10×1 datetime array
   24-Oct-2016
   26-Nov-2016
   16-Feb-2016
```

```
   29-Nov-2016
   18-Aug-2016
   05-Feb-2016
   11-Apr-2016
   18-Jul-2016
   15-Dec-2016
   18-Dec-2016
```

```
Y = discretize(X,'month','categorical')
```

```
Y = 10×1 categorical array
     Oct-2016
     Nov-2016
     Feb-2016
     Nov-2016
     Aug-2016
     Feb-2016
     Apr-2016
     Jul-2016
     Dec-2016
     Dec-2016
```

Change Display Format of Duration Values

Group duration values by hour and return the result in a variety of display formats.

Group some random duration values by hour and return the results as a categorical array.

```
X = hours(abs(randn(1,10)))'
```

```
X = 10×1 duration array
   0.53767 hr
    1.8339 hr
    2.2588 hr
   0.86217 hr
   0.31877 hr
    1.3077 hr
   0.43359 hr
   0.34262 hr
    3.5784 hr
    2.7694 hr
```

```
Y = discretize(X,'hour','categorical')
```

```
Y = 10×1 categorical array
     [0 hr, 1 hr)
     [1 hr, 2 hr)
     [2 hr, 3 hr)
     [0 hr, 1 hr)
     [0 hr, 1 hr)
     [1 hr, 2 hr)
     [0 hr, 1 hr)
     [0 hr, 1 hr)
     [3 hr, 4 hr]
     [2 hr, 3 hr)
```

Change the display of the results to be a number of minutes.

```
Y = discretize(X,'hour','categorical','m')
```

```
Y = 10×1 categorical array
     [0 min, 60 min)
     [60 min, 120 min)
     [120 min, 180 min)
     [0 min, 60 min)
     [0 min, 60 min)
     [60 min, 120 min)
     [0 min, 60 min)
     [0 min, 60 min)
     [180 min, 240 min]
     [120 min, 180 min)
```

Change the format again to display as a number of hours, minutes and seconds.

```
Y = discretize(X,'hour','categorical','hh:mm:ss')
```

```
Y = 10×1 categorical array
     [00:00:00, 01:00:00)
     [01:00:00, 02:00:00)
     [02:00:00, 03:00:00)
     [00:00:00, 01:00:00)
     [00:00:00, 01:00:00)
     [01:00:00, 02:00:00)
     [00:00:00, 01:00:00)
     [00:00:00, 01:00:00)
     [03:00:00, 04:00:00]
```

```
[02:00:00, 03:00:00)
```

Assign Bin Values

Use the right edge of each bin as the `values` input. The values of the elements in each bin are always less than the bin value.

```
X = randi(100,1,10);
edges = 0:25:100;
values = edges(2:end);
Y = discretize(X,edges,values)
```

```
Y =

   100   100    25   100    75    25    50    75   100   100
```

Include Right Edge of Each Bin

Use the `'IncludedEdge'` input to specify that each bin includes its right bin edge. The first bin includes both edges. Compare the result to the default inclusion of left bin edges.

```
X = 1:2:11;
edges = [1 3 4 7 10 11];
Y = discretize(X,edges,'IncludedEdge','right')
```

```
Y =

     1     1     3     3     4     5
```

```
Z = discretize(X,edges)
```

```
Z =

     1     2     3     4     4     5
```

Group Data into Categorical Array

Group numeric data into a categorical array. Use the result to confirm the amount of data that falls within 1 standard deviation of the mean value.

Group normally distributed data into bins according to the distance from the mean, measured in standard deviations.

```
X = randn(1000,1);
edges = std(X)*(-3:3);
Y = discretize(X,edges, 'categorical', ...
    {'-3sigma', '-2sigma', '-sigma', 'sigma', '2sigma', '3sigma'});
```

Y contains undefined categorical values for the elements in X that are farther than 3 standard deviations from the mean.

Preview the values in Y.

```
Y(1:15)
```

```
ans = 15×1 categorical array
     sigma
     2sigma
     -3sigma
     sigma
     sigma
     -2sigma
     -sigma
     sigma
     <undefined>
     3sigma
     -2sigma
     <undefined>
     sigma
     -sigma
     sigma
```

Confirm that approximately 68% of the data falls within one standard deviation of the mean.

```
nnz(Y=='-sigma' | Y=='sigma')/numel(Y)
```

```
ans = 0.6910
```

Input Arguments

X — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array. `X` contains the data that you want to distribute into bins.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `datetime` | `duration`

`edges` — Bin edges

numeric vector

Bin edges, specified as a monotonically increasing numeric vector. Consecutive elements in `edges` form discrete bins, which `discretize` uses to partition the data in `X`. By default, each bin includes the left bin edge, except for the last bin, which includes both bin edges.

`edges` must have at least two elements, since `edges(1)` is the left edge of the first bin and `edges(end)` is the right edge of the last bin.

Example: `Y = discretize([1 3 5],[0 2 4 6])` distributes the values `1`, `3`, and `5` into three bins, which have edges `[0,2)`, `[2,4)`, and `[4,6]`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `datetime` | `duration`

`N` — Number of bins

scalar integer

Number of bins, specified as a scalar integer.

Example: `[Y,E] = discretize(X,5)` divides `X` into 5 bins with a uniform width.

`dur` — Uniform bin duration

scalar `duration` | scalar `calendarDuration` | `'second'` | `'minute'` | `'hour'` | `'day'` | `'week'` | `'month'` | `'quarter'` | `'year'` | `'decade'` | `'century'`

Uniform bin duration, specified as a scalar `duration` or `calendarDuration`, or as one of the values in the table.

Value	Works with...	Description
`'second'`	Datetime or duration values	Each bin is 1 second.
`'minute'`	Datetime or duration values	Each bin is 1 minute.
`'hour'`	Datetime or duration values	Each bin is 1 hour.

Value	Works with...	Description
`'day'`	Datetime or duration values	• For datetime inputs, each bin is 1 calendar day. This value accounts for Daylight Saving Time shifts. • For duration inputs, each bin is 1 fixed-length day (24 hours).
`'week'`	Datetime values	Each bin is 1 calendar week.
`'month'`	Datetime values	Each bin is 1 calendar month.
`'quarter'`	Datetime values	Each bin is 1 calendar quarter.
`'year'`	Datetime or duration values	• For datetime inputs, each bin is 1 calendar year. This value accounts for leap days. • For duration inputs, each bin is 1 fixed-length year (365.2425 days).
`'decade'`	Datetime values	Each bin is 1 decade (10 calendar years).
`'century'`	Datetime values	Each bin is 1 century (100 calendar years).

Example: `[Y,E] = discretize(X,'hour')` divides `X` into bins with a uniform duration of 1 hour.

Data Types: `char` | `duration` | `calendarDuration`

`values` — Bin values

vector

Bin values, specified as a vector of any data type. `values` must have the same length as the number of bins, `length(edges)-1`. The elements in `values` replace the normal bin index in the output. That is, if `X(1)` falls into bin `2`, then `discretize` returns `Y(1)` as `values(2)` rather than `2`.

If `values` is a cell array, then all the input data must belong to a bin.

Example: `Y = discretize(randi(5,10,1),[1 1.5 3 5],diff([1 1.5 3 5]))` returns the widths of the bins, rather than indices ranging from 1 to 3.

`displayFormat` — Datetime and duration display format
character vector

Datetime and duration display format, specified as a character vector. The `displayFormat` value does not change the values in `Y`, only their display. You can specify `displayFormat` using any valid display format for datetime and duration arrays. For more information about the available options, see "Set Date and Time Display Format".

Example: `discretize(X,'day','categorical','h')` specifies a display format for a duration array.

Example: `discretize(X,'day','categorical','yyyy-MM-dd')` specifies a display format for a datetime array.

Data Types: `char`

`categoryNames` — Categorical array category names
cell array of character vectors

Categorical array category names, specified as a cell array of character vectors. `categoryNames` must have length equal to the number of bins.

Example: `Y = discretize(randi(5,10,1),[1 1.5 3 5],'categorical',{'A' 'B' 'C'})` distributes the data into three categories, `A`, `B`, and `C`.

Data Types: `cell`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `Y = discretize(X,edges,'IncludedEdge,'right')`

`'IncludedEdge'` — Edges to include in each bin
`'left'` (default) | `'right'`

Edges to include in each bin, specified as the comma-separated pair consisting of `'IncludedEdge'` and one of these values:

- `'left'` — All bins include the left bin edge, except for the last bin, which includes both edges. This is the default.
- `'right'` — All bins include the right bin edge, except for the first bin, which includes both edges.

Example: `Y = discretize(randi(11,10,1),1:2:11,'IncludedEdge','right')` includes the right bin edge in each bin.

Output Arguments

Y — Bins

vector | matrix | multidimensional array | ordinal categorical array

Bins, returned as a numeric vector, matrix, multidimensional array, or ordinal categorical array. `Y` is the same size as `X`, and each element describes the bin placement for the corresponding element in `X`. If `values` is specified, then the data type of `Y` is the same as `values`. Out-of-range elements are expressed differently depending on the data type of the output:

- For numeric outputs, `Y` contains `NaN` values for out-of-range elements in `X` (where `X(i) < edges(1)` or `X(i) > edges(end)`), or where `X` contains a `NaN`.
- If `Y` is a categorical array, then it contains undefined elements for out-of-range or `NaN` inputs.
- If `values` is a vector of an integer data type, then `Y` contains `0` for out-of-range or `NaN` inputs.

The default category name formats in `Y` for the syntax `discretize(X,dur,'categorical')` are:

Value of dur	Default Category Name Format	Format Example
`'second'`	global default format	`28-Jan-2016 10:32:06`
`'minute'`		
`'hour'`		

Value of dur	Default Category Name Format	Format Example
'day'	global default date format	28-Jan-2016
'week'	[global_default_date_f global_default_date_fo	[24-Jan-2016, 30- Jan-2016)
'month'	'MMM-uuuu'	Jun-2016
'quarter'	'QQQ uuuu'	Q4 2015
'year'	'uuuu'	2016
'decade'	'[uuuu, uuuu)'	[2010, 2020)
'century'		

E — Bin edges
vector

Bin edges, returned as a vector. Specify this output to see the bin edges that `discretize` calculates in cases where you do not explicitly pass in the bin edges.

Tips

- The behavior of `discretize` is similar to that of the `histcounts` function. Use `histcounts` to find the number of elements in each bin. On the other hand, use `discretize` to find which bin each element belongs to (without counting).

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`categorical` | `histcounts` | `histogram`

Topics

"Replace Discouraged Instances of hist and histc"

Introduced in R2015a

disp

Display value of variable

Syntax

```
disp(X)
```

Description

`disp(X)` displays the value of variable `X` without printing the variable name. Another way to display a variable is to type its name, which displays a leading "`X =`" before the value.

If a variable contains an empty array, `disp` returns without displaying anything.

Examples

Display Variable Values

Create a variable with numbers and another variable with text.

```
A = [15 150];
S = 'Hello World.';
```

Display the value of each variable.

```
disp(A)
```

```
    15   150
```

```
disp(S)
```

```
Hello World.
```

Display Matrix with Column Labels

Display a matrix and label the columns as `Corn`, `Oats`, and `Hay`.

```
X = rand(5,3);
disp('     Corn      Oats      Hay')
```

```
     Corn      Oats      Hay
```

```
disp(X)
```

```
    0.8147    0.0975    0.1576
    0.9058    0.2785    0.9706
    0.1270    0.5469    0.9572
    0.9134    0.9575    0.4854
    0.6324    0.9649    0.8003
```

Display Hyperlink in Command Window

Display a link to a Web page by including HTML hyperlink code as input to `disp`. For example, display a link to the MathWorks Web site.

```
X = '<a href = "http://www.mathworks.com">MathWorks Web Site</a>';
disp(X)
```

```
MathWorks Web Site
```

Display Multiple Variables on Same Line

Here are three ways to display multiple variable values on the same line in the Command Window.

Concatenate multiple character vectors together using the `[]` operator. Convert any numeric values to characters using the `num2str` function. Use `disp` to display the result.

```
name = 'Alice';
age = 12;
X = [name,' will be ',num2str(age),' this year.'];
disp(X)
```

```
Alice will be 12 this year.
```

Use `sprintf` to create text, and then display it with `disp`.

```
name = 'Alice';
age = 12;
X = sprintf('%s will be %d this year.',name,age);
disp(X)
```

```
Alice will be 12 this year.
```

Use `fprintf` to directly display the text without creating a variable. However, to terminate the display properly, you must end the text with the newline (`\n`) metacharacter.

```
name = 'Alice';
age = 12;
fprintf('%s will be %d this year.\n',name,age);
```

```
Alice will be 12 this year.
```

Input Arguments

X — Input array

array

Input array.

To display more than one array, you can use concatenation or the `sprintf` or `fprintf` functions as shown in the example, "Display Multiple Variables on Same Line" on page 1-2679.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

See Also

See Also

`format` | `fprintf` | `int2str` | `num2str` | `sprintf`

Introduced before R2006a

disp (serial)

Serial port object summary information

Syntax

```
obj
disp(obj)
```

Description

`obj` or `disp(obj)` displays summary information for `obj`, a serial port object or an array of serial port objects.

Examples

The following commands display summary information for the serial port object `s`. on a Windows platform

```
s = serial('COM1')
s.BaudRate = 300
s
```

Tips

In addition to the syntax shown above, you can display summary information for `obj` by excluding the semicolon when:

- Creating a serial port object
- Configuring property values using the dot notation

Use the display summary to quickly view the communication settings, communication state information, and information associated with read and write operations.

Introduced before R2006a

display

Used internally for command-window display

Syntax

```
display(X)
```

Description

`display(X)` is called by MATLAB for the object `X` when a statement is not terminated by a semicolon.

Input Arguments

`X` — Input value
variable | expression

Input value, specified as a variable or expression.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`ans` | `disp` | `sprintf`

Topics

"Custom Display Interface"

Introduced before R2006a

dither

Convert image, increasing apparent color resolution by dithering

Syntax

```
X = dither(RGB, map)
X = dither(RGB, map, Qm, Qe)
BW = dither(I)
```

Description

`X = dither(RGB, map)` creates an indexed image approximation of the RGB image in the array `RGB` by dithering the colors in the colormap `map`. The colormap cannot have more than 65,536 colors.

`X = dither(RGB, map, Qm, Qe)` creates an indexed image from `RGB`, where `Qm` specifies the number of quantization bits to use along each color axis for the inverse color map, and `Qe` specifies the number of quantization bits to use for the color space error calculations. If `Qe < Qm`, dithering cannot be performed, and an undithered indexed image is returned in `X`. If you omit these parameters, `dither` uses the default values `Qm = 5`, `Qe = 8`.

`BW = dither(I)` converts the grayscale image in the matrix `I` to the binary (black and white) image `BW` by dithering.

Class Support

`RGB` can be `uint8`, `uint16`, `single`, or `double`. `I` can be `uint8`, `uint16`, `int16`, `single`, or `double`. All other input arguments must be `double`. `BW` is `logical`. `X` is `uint8`, if it is an indexed image with 256 or fewer colors; otherwise, it is `uint16`.

Algorithms

`dither` increases the apparent color resolution of an image by applying Floyd-Steinberg's error diffusion dither algorithm.

References

[1] Floyd, R. W., and L. Steinberg, "An Adaptive Algorithm for Spatial Gray Scale," *International Symposium Digest of Technical Papers,* Society for Information Displays, 1975, p. 36.

[2] Lim, Jae S., *Two-Dimensional Signal and Image Processing*, Englewood Cliffs, NJ, Prentice Hall, 1990, pp. 469-476.

See Also

`rgb2ind`

divergence

Compute divergence of vector field

Syntax

```
div = divergence(X,Y,Z,U,V,W)
div = divergence(U,V,W)
div = divergence(X,Y,U,V)
div = divergence(U,V)
```

Description

`div = divergence(X,Y,Z,U,V,W)` computes the divergence of a 3-D vector field having vector components `U`, `V`, `W`.

The arrays `X`, `Y`, and `Z`, which define the coordinates for the vector components `U`, `V`, and `W`, must be monotonic, but do not need to be uniformly spaced. `X`, `Y`, and `Z` must have the same number of elements.

`div = divergence(U,V,W)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X Y Z] = meshgrid(1:n,1:m,1:p)
```

where `[m,n,p] = size(U)`.

`div = divergence(X,Y,U,V)` computes the divergence of a 2-D vector field `U`, `V`.

The arrays `X` and `Y`, which define the coordinates for `U` and `V`, must be monotonic, but do not need to be uniformly spaced. `X` and `Y` must have the same number of elements, as if produced by `meshgrid`.

`div = divergence(U,V)` assumes `X` and `Y` are determined by the expression

```
[X Y] = meshgrid(1:n,1:m)
```

where `[m,n] = size(U)`.

Examples

Divergence of Vector Volume Data as Slice Planes

Display the divergence of vector volume data as slice planes. Use color to indicate divergence.

```
load wind
div = divergence(x,y,z,u,v,w);
h = slice(x,y,z,div,[90 134],59,0);
colormap('jet');
shading interp
daspect([1 1 1]);
axis tight
camlight
set([h(1),h(2)],'ambientstrength',.6);
```

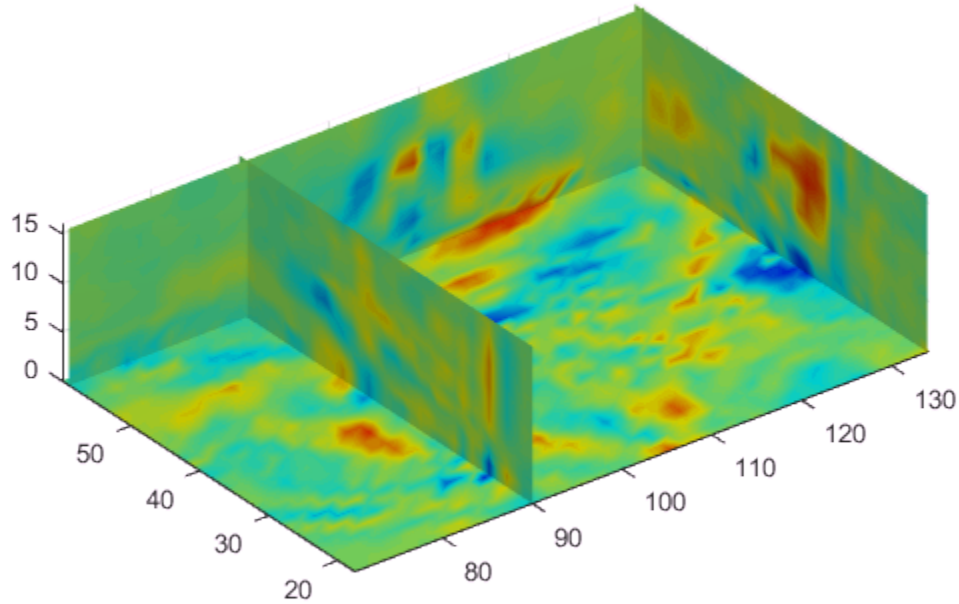

See Also

`curl` | `streamtube` | `isosurface`

Topics

"Overview of Volume Visualization"
"Displaying Divergence with Stream Tubes"

Introduced before R2006a

dlmread

Read ASCII-delimited file of numeric data into matrix

Syntax

```
M = dlmread(filename)
M = dlmread(filename,delimiter)
M = dlmread(filename,delimiter,R1,C1)
M = dlmread(filename,delimiter,[R1 C1 R2 C2])
```

Description

`M = dlmread(filename)` reads an ASCII-delimited numeric data file into matrix `M`. The `dlmread` function detects the delimiter from the file and treats repeated white spaces as a single delimiter.

`M = dlmread(filename,delimiter)` reads data from the file using the specified delimiter and treats repeated delimiter characters as separate delimiters.

`M = dlmread(filename,delimiter,R1,C1)` starts reading at row offset `R1` and column offset `C1`. For example, the offsets `R1=0`, `C1=0` specify the first value in the file.

To specify row and column offsets without specifying a delimiter, use an empty character as a placeholder, for example, `M = dlmread(filename,'',2,1)`.

`M = dlmread(filename,delimiter,[R1 C1 R2 C2])` reads only the range bounded by row offsets `R1` and `R2` and column offsets `C1` and `C2`. Another way to define the range is to use spreadsheet notation, such as `'A1..B7'` instead of `[0 0 6 1]`.

Examples

Read Entire Delimited File

Read the sample file, `count.dat`.

```
M = dlmread('count.dat')
```

```
M =

    11    11     9
     7    13    11
    14    17    20
    11    13     9
    43    51    69
    38    46    76
    61   132   186
    75   135   180
    38    88   115
    28    36    55
```

`dlmread` detects the delimiter from the file and returns a matrix.

Read File Containing Empty Delimited Fields

Write two matrices to a file, and then read the entire file using `dlmread`.

Export a matrix to a file named `myfile.txt`. Then, append an additional matrix to the file that is offset one row below the first.

```
X = magic(3);
dlmwrite('myfile.txt',[X*5 X/5],' ')
dlmwrite('myfile.txt',X,'-append', ...
   'roffset',1,'delimiter',' ')
```

View the file contents.

```
type myfile.txt
```

```
40 5 30 1.6 0.2 1.2
15 25 35 0.6 1 1.4
20 45 10 0.8 1.8 0.4

8 1 6
3 5 7
4 9 2
```

Read the entire file using `dlmread`.

```
M = dlmread('myfile.txt')
```

```
M =
```

```
   40.0000    5.0000   30.0000    1.6000    0.2000    1.2000
   15.0000   25.0000   35.0000    0.6000    1.0000    1.4000
   20.0000   45.0000   10.0000    0.8000    1.8000    0.4000
    8.0000    1.0000    6.0000         0         0         0
    3.0000    5.0000    7.0000         0         0         0
    4.0000    9.0000    2.0000         0         0         0
```

When `dlmread` imports a file containing nonrectangular data, it fills empty fields with zeros.

Read Delimited File Starting At Specific Row and Column Offset

Create a file named `dlmlist.txt` that contains column headers and space-delimited values.

```
test max min direction
10 27.7 12.4 12
11 26.9 13.5 18
12 27.4 16.9 31
13 25.1 12.7 29
```

Read the numeric values in the file. Specify a space delimiter, a row offset of 1, and a column offset of 0.

```
filename = 'dlmlist.txt';
M = dlmread(filename,' ',1,0)
```

```
M =

   10.0000   27.7000   12.4000   12.0000
   11.0000   26.9000   13.5000   18.0000
   12.0000   27.4000   16.9000   31.0000
   13.0000   25.1000   12.7000   29.0000
```

Read Specific Range from Delimited File

Create a file named `dlmlist.txt` that contains column headers and space-delimited values.

```
test max min direction
10 27.7 12.4 12
11 26.9 13.5 18
```

```
12 27.4 16.9 31
13 25.1 12.7 29
```

Read only the last two rows of numeric data from the file.

```
M = dlmread('dlmlist.txt',' ',[3 0 4 3])
```

```
M =

   12.0000   27.4000   16.9000   31.0000
   13.0000   25.1000   12.7000   29.0000
```

Input Arguments

`filename` — File name

character vector | string

File name, specified as a character vector or string.

Example: `'myFile.dat'` or `"myFile.dat"`

Data Types: `char` | `string`

`delimiter` — Field delimiter character

character vector | string

Field delimiter character, specified as a character vector or string. Use `'\t'` to specify a tab delimiter.

Example: `','` or `","`

Example: `' '` or `" "`

Data Types: `char` | `string`

`R1` — Starting row offset

0 (default) | nonnegative integer

Starting row offset, specified as a nonnegative integer. The first row has an offset of 0.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`C1` — Starting column offset

0 (default) | nonnegative integer

Starting column offset, specified as a nonnegative integer. The first column has an offset of 0.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`R2` — Ending row offset
nonnegative integer

Ending row offset, specified as a nonnegative integer. The first row has an offset of 0.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`C2` — Ending column offset
nonnegative integer

Ending column offset, specified as a nonnegative integer. The first column has an offset of 0.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Tips

- Skip header rows or columns by specifying row and column offsets. All values in the file other than headers must be numeric.

Algorithms

`dlmread` fills empty delimited fields with zero. When the `dlmread` function reads data files with lines that end with a nonspace delimiter, such as a semicolon, it returns a matrix, `M`, that has an additional last column of zeros.

`dlmread` imports any complex number as a whole into a complex numeric field. This table shows valid forms for a complex number.

Form	Example
±<real>±<imag>i|j	5.7-3.1i

Form	Example
±<imag>i|j	-7j

Embedded white space in a complex number is invalid and `dlmread` regards it as a field delimiter.

See Also

See Also

`dlmwrite` | `readtable` | `textscan` | `uiimport`

Topics

"Ways to Import Text Files"

Introduced before R2006a

dlmwrite

Write matrix to ASCII-delimited file

Syntax

```
dlmwrite(filename,M)
dlmwrite(filename,M,'-append')
```

```
dlmwrite( ___ ,Name,Value)
```

```
dlmwrite(filename,M,delimiter)
dlmwrite(filename,M,delimiter,row,col)
```

Description

`dlmwrite(filename,M)` writes numeric data in array `M` to an ASCII format file, `filename`, using the default delimiter (`,`) to separate array elements. If the file, `filename`, already exists, `dlmwrite` overwrites the file.

`dlmwrite(filename,M,'-append')` appends the data to the end of the existing file, `filename`.

`dlmwrite( ___ ,Name,Value)` additionally specifies delimiter, newline character, offset, and precision options using one or more name-value pair arguments.

`dlmwrite(filename,M,delimiter)` writes array `M` to the file, `filename`, using the specified delimiter, `delimiter`, to separate array elements.

`dlmwrite(filename,M,delimiter,row,col)` writes the array starting at the specified row and column `row` and `col`, in the destination file. Empty elements separated by `delimiter` fill the leading rows and columns.

Examples

Write Comma-Separated Data

Create an array of sample data, `M`.

```
M = magic(3);
```

Write matrix `M` to a file, `'myFile.txt'`, using the default delimiter (`,`).

```
dlmwrite('myFile.txt',M)
```

View the data in the file.

```
type('myFile.txt')
```

```
8,1,6
3,5,7
4,9,2
```

Write Tab-Delimited Data and Specify Precision

Create an array of sample data, `M`.

```
M = magic(3)*pi
```

```
M =

   25.1327    3.1416   18.8496
    9.4248   15.7080   21.9911
   12.5664   28.2743    6.2832
```

Write matrix `M` to a file, `'myFile.txt'`, delimited by the tab character and using a precision of 3 significant digits.

```
dlmwrite('myFile.txt',M,'delimiter','\t','precision',3)
```

View the data in the file.

```
type('myFile.txt')
```

```
25.1 3.14 18.8
9.42 15.7 22
12.6 28.3 6.28
```

Write and Append Data to File

Create two arrays of sample numeric data.

```
M = magic(5);
N = magic(3);
```

Export matrix M to a file and use whitespace as the delimiter.

```
dlmwrite('myFile.txt',M,'delimiter',' ');
```

Append matrix N to the file, offset from the existing data by one row. Then, view the file.

```
dlmwrite('myFile.txt',N,'-append',...
'delimiter',' ','roffset',1)
type('myFile.txt')
```

```
17 24 1 8 15
23 5 7 14 16
4 6 13 20 22
10 12 19 21 3
11 18 25 2 9

8 1 6
3 5 7
4 9 2
```

Read the data in `'myFile.txt'` using `dlmread`.

```
dlmread('myFile.txt')
```

```
ans =

    17    24     1     8    15
    23     5     7    14    16
     4     6    13    20    22
    10    12    19    21     3
    11    18    25     2     9
     8     1     6     0     0
     3     5     7     0     0
     4     9     2     0     0
```

When `dlmread` reads the two matrices from the file, it pads the smaller matrix with zeros.

Write Data and Specify Precision

Create an array of sample numeric data.

```
M = magic(3);
```

Export matrix M to a file using a precision of 6 decimal places.

```
dlmwrite('myFile.txt',M,'precision','%.6f');
```

View the data in the file.

```
type('myFile.txt')
```

```
8.000000,1.000000,6.000000
3.000000,5.000000,7.000000
4.000000,9.000000,2.000000
```

Input Arguments

`filename` — Name of file to write

character vector | string

Name of file to write, specified as a character vector or string.

Example: `'myFile.txt'` or `"myFile.txt"`

Data Types: `char` | `string`

`M` — Numeric data to write

matrix | cell array of numeric values

Numeric data to write, specified as a matrix or a cell array of numeric values with one value per cell.

Example: `[1,2,3;4,5,6]`

Example: `{1,2,3;4,5,6}`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `cell`
Complex Number Support: Yes

`delimiter` — Delimiter to separate array elements

`','` (default) | character vector | string

Delimiter to separate array elements, specified as a character vector or string, containing a single character or characters of a control sequence. Use `'\t'` to produce tab-delimited files.

Example: `';'` or `";"`

Example: `'\t'` or `"\t"`

Data Types: `char` | `string`

`row` — Row offset
0 (default) | scalar

Row offset, specified as a scalar. The row offset indicates the number of rows to skip before writing the numeric data. `row` is zero-based, so that `row = 0` instructs MATLAB to begin writing in the first row of the destination file. Skipped rows are populated with the specified delimiter.

`col` — Column offset
0 (default) | scalar

Column offset, specified as a scalar. The column offset indicates the number of columns to skip before writing the numeric data. `col` is zero-based, so that `col = 0` instructs MATLAB to begin writing in the first column of the destination file. Skipped columns are separated with the specified delimiter.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `dlmwrite('myFile.txt',M,'precision',4,'delimiter',' ')` writes the numeric values in array `M` with four significant digits and delimited using the whitespace character.

`'delimiter'` — Delimiter to separate array elements
`','` (default) | character vector | string

Delimiter to separate array elements, specified as the comma-separated pair consisting of `'delimiter'` and a character vector or string, containing a single character or characters of a control sequence. Use `'\t'` to produce tab-delimited files.

Example: `'delimiter',';'` or `'delimiter',";"`

Example: `'delimiter','\t'` or `'delimiter',"\t"`

Data Types: `char` | `string`

`'roffset'` — Row offset

0 (default) | scalar

Row offset, specified as the comma-separated pair consisting of `'roffset'` and a scalar. The row offset indicates the number of rows to skip before writing the numeric data. These rows are populated with the specified delimiter. When appending to an existing file, the new data is offset from the end of the existing data.

The row offset is zero-based, so that `'roffset',0` instructs MATLAB to begin writing in the first row of the destination file, which is the default. However, when appending to a file, `'roffset',0` instructs MATLAB to begin writing in the first row immediately following existing data.

Example: `'roffset',2`

`'coffset'` — Column offset

0 (default) | scalar

Column offset from the left side of the destination file, specified as the comma-separated pair consisting of `'coffset'` and a scalar. The column offset indicates the number of columns to skip before writing the numeric data. These columns are separated with the specified delimiter.

The column offset is zero-based, so that `'coffset',0` instructs MATLAB to begin writing in the first column of the destination file, which is the default.

Example: `'coffset',1`

`'precision'` — Numeric precision

5 (default) | scalar | C-style format specifier | character vector

Numeric precision to use in writing data to the file, specified as the comma-separated pair consisting of `'precision'` and a scalar or a C-style format specifier that begins with `%`, such as `'%10.5f'`. If the value of `precision` is a scalar, then it indicates the number of significant digits.

Example: `'precision',3`

Example: `'precision','%10.5f'`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char`

`'newline'` — Line terminator
`'pc'` | `'unix'`

Line terminator, specified as the comma-separated pair consisting of `'newline'` and either `'pc'` to use a carriage return/line feed (`CR/LF`), or `'unix'` to use a line feed (`LF`).

Example: `'newline','pc'`

Tips

- `dlmwrite` writes a file that spreadsheet programs can read. Alternatively, if your system has Excel for Windows installed, you can create a spreadsheet using `xlswrite`.

See Also

See Also
`dlmread` | `writetable` | `xlswrite`

Introduced before R2006a

dmperm

Dulmage-Mendelsohn decomposition

Syntax

```
p = dmperm(A)
[p,q,r,s,cc,rr] = dmperm(A)
```

Description

`p = dmperm(A)` finds a vector `p` such that `p(j) = i` if column `j` is matched to row `i`, or zero if column `j` is unmatched. If `A` is a square matrix with full structural rank, `p` is a maximum matching row permutation and `A(p,:)` has a zero-free diagonal. The structural rank of `A` is `sprank(A) = sum(p>0)`.

`[p,q,r,s,cc,rr] = dmperm(A)` where `A` need not be square or full structural rank, finds the Dulmage-Mendelsohn decomposition of `A`. `p` and `q` are row and column permutation vectors, respectively, such that `A(p,q)` has a block upper triangular form. `r` and `s` are index vectors indicating the block boundaries for the fine decomposition. `cc` and `rr` are vectors of length five indicating the block boundaries of the coarse decomposition.

`C = A(p,q)` is split into a `4`-by-`4` set of coarse blocks:

```
A11  A12  A13  A14
0     0   A23  A24
0     0    0   A34
0     0    0   A44
```

where `A12`, `A23`, and `A34` are square with zero-free diagonals. The columns of `A11` are the unmatched columns, and the rows of `A44` are the unmatched rows. Any of these blocks can be empty. In the coarse decomposition, the `(i,j)th` block is `C(rr(i):rr(i+1)-1,cc(j):cc(j+1)-1)`. For a linear system,

- `[A11 A12]` is the underdetermined part of the system—it is always rectangular and with more columns and rows, or `0`-by-`0`,
- `A23` is the well-determined part of the system—it is always square, and

- `[A34 ; A44]` is the overdetermined part of the system—it is always rectangular with more rows than columns, or `0`-by-`0`.

The structural rank of `A` is `sprank(A) = rr(4)-1`, which is an upper bound on the numerical rank of `A`. `sprank(A) = rank(full(sprand(A)))` with probability 1 in exact arithmetic.

The `A23` submatrix is further subdivided into block upper triangular form via the fine decomposition (the strongly connected components of `A23`). If `A` is square and structurally nonsingular, `A23` is the entire matrix.

`C(r(i):r(i+1)-1,s(j):s(j+1)-1)` is the `(i,j)`th block of the fine decomposition. The `(1,1)` block is the rectangular block `[A11 A12]`, unless this block is `0`-by-`0`. The `(b,b)` block is the rectangular block `[A34 ; A44]`, unless this block is `0`-by-`0`, where `b = length(r)-1`. All other blocks of the form `C(r(i):r(i+1)-1,s(i):s(i+1)-1)` are diagonal blocks of `A23`, and are square with a zero-free diagonal.

Tips

If `A` is a reducible matrix, the linear system $Ax = b$ can be solved by permuting `A` to a block upper triangular form, with irreducible diagonal blocks, and then performing block backsubstitution. Only the diagonal blocks of the permuted matrix need to be factored, saving fill and arithmetic in the blocks above the diagonal.

In graph theoretic terms, `dmperm` finds a maximum-size matching in the bipartite graph of `A`, and the diagonal blocks of `A(p,q)` correspond to the strong Hall components of that graph. The output of `dmperm` can also be used to find the connected or strongly connected components of an undirected or directed graph. For more information see Pothen and Fan [1].

References

[1] Pothen, Alex and Chin-Ju Fan "Computing the Block Triangular Form of a Sparse Matrix" *ACM Transactions on Mathematical Software* Vol 16, No. 4 Dec. 1990, pp. 303-324.

See Also

`sprank`

Introduced before R2006a

doc

Reference page in Help browser

Syntax

```
doc
doc name
```

Description

`doc` opens the Help browser. If the Help browser is already open, but not visible, then `doc` brings it to the foreground and opens a new tab.

`doc name` displays documentation for the functionality specified by `name`, such as a function, class, or block.

- If there is a MathWorks reference page corresponding to `name`, then `doc` displays the page in the Help browser. The `doc` command does not display third-party or custom HTML documentation.
- If there is no reference page corresponding to `name`, then `doc` searches for help text in a file named *`name`*`.m` or *`name`*`.mlx`. When help text is available, `doc` displays it in the Help browser.
- If there is no reference page and no help text associated with `name`, then `doc` searches the documentation for `name` and displays the search results in the Help browser.

Examples

Display Function Reference Page

Display the reference page for the `abs` function.

```
doc abs
```

Several products include different versions of `abs`. If your Help preferences support displaying documentation for those products, then the Help browser displays the

MATLAB® `abs` reference page and a message with links to other versions of `abs`. This message appears at the top of the page.

Class and Method Reference Pages

Display the reference page for the `handle` class.

```
doc handle
```

Display the reference page for the `findobj` method in the `handle` class.

```
doc handle.findobj
```

Display the reference page for the `Map` class in the `containers` package.

```
doc containers.Map
```

Custom Class Pages

Display formatted help text for a custom class.

The class file `sads.m` is an example file that shows how to create a class. Add the example folder to the path and request the documentation for `sads`.

```
addpath(...
   fullfile(matlabroot,'help','techdoc','matlab_env',...
   'examples'))
doc sads
```

Display the help for the `steer` method of the `sads` class. Because the help text follows MATLAB conventions, MATLAB formats the display in the browser.

```
doc sads.steer
```

Input Arguments

`name` — Name of function, class, block, or other functionality

character vector

Name of a function, class, block, or other functionality, specified as a character vector. Alternatively, an operator symbol.

Some classes and other packaged items require that you specify the package name. Events, properties, and some methods require that you specify the class name. Separate the components of the name with periods, such as:

```
doc className.name
doc packageName.name
doc packageName.className.name
```

Methods for some classes are not accessible using the `doc` command; instead, use links on the class reference page.

Tips

- To access third-party or custom documentation, open the Help browser and navigate to the documentation home page. Then, at the bottom of the page, click **Supplemental Software**.

See Also

See Also

`help` | `web`

Topics

"Ways to Get Function Help"
"Add Help for Your Program"
"Display Custom Documentation"

Introduced before R2006a

docsearch

Help browser search

Syntax

```
docsearch
docsearch expression
```

Description

`docsearch` opens the Help browser and displays the documentation home page. If the Help browser is already open, but not visible, then `docsearch` brings it to the foreground.

`docsearch expression` searches the documentation for pages with words that match the specified expression and highlights them. To clear highlighting, press the **Esc** key. To search third-party or custom documentation, you must first run the `builddocsearchdb` command to build a search database for the additional help files.

Examples

Search for Single Words

Find all documentation pages that contain the word *plot*.

```
docsearch plot
```

Search for Multiple Words

Find documentation pages with the words *plot* and *tools*.

```
docsearch plot tools
```

Expand the search to include variations of the word *plot*, such as *plotting* or *plots*, using a wildcard character (*).

```
docsearch plot* tools
```

Find pages with either word, but not necessarily both words, using the `OR` operator.

```
docsearch plot OR tools
```

Narrow the search to pages that include an exact phrase by enclosing the phrase in quotation marks.

```
docsearch('"plot tools"')
```

Input Arguments

`expression` — Expression that defines search terms

character vector

Expression that defines search terms, specified as a character vector. Expressions can include:

- Quotation marks to specify exact phrases, such as `"plot tools"`.
- Boolean operator keywords in uppercase (listed here in order of precedence): `NOT`, `OR`, `AND`.
- Asterisk (`*`) wildcard characters, except at the beginning of a word or in an exact phrase. Searches require that at least two characters in the expression are *not* wildcard characters.

Tips

- To access third-party or custom documentation without the `docsearch` command, open the Help browser and navigate to the documentation home page. Then, at the bottom of the page, click **Supplemental Software**.

See Also

See Also

`builddocsearchdb` | `doc`

Topics

"Search Syntax and Tips"

Introduced before R2006a

dos

Execute DOS command and return output

Syntax

```
status = dos(command)
[status,cmdout] = dos(command)
[status,cmdout] = dos(command,'-echo')
```

Description

`status = dos(command)` executes the specified MS-DOS® command for Windows platforms, and waits for the command to finish execution before returning the exit status to the `status` variable.

`[status,cmdout] = dos(command)` also returns the output of the DOS command to `cmdout`. This syntax is most useful for DOS console commands that do not require user input, such as `dir`.

`[status,cmdout] = dos(command,'-echo')` also displays (echoes) the command output in the MATLAB Command Window. This syntax is most useful for DOS console commands that require user input and that run correctly in the MATLAB Command Window, such as `comp`.

Examples

Save DOS Command Exit Status

To create a folder named `mynew`, call a DOS command and save the exit status to a variable.

```
command = 'mkdir mynew';
status = dos(command)
```

```
status =
```

```
     0
```

The `status` of zero indicates that the `mynew` folder was created successfully.

Open and Run a Windows UI Command

Open Microsoft Notepad and immediately return the exit status to MATLAB by appending an ampersand (&) to the `notepad` command.

```
status = dos('notepad &')
```

```
status =

     0
```

The `status` of zero indicates that Notepad successfully started.

Save Successful DOS Command Status and Output

Execute the DOS command, `dir`, and view the exit status and command output.

```
[status,cmdout] = dos('dir');
status, cmdout
```

```
status =

     0

cmdout =

 Volume in drive C is OSDisk
 Volume Serial Number is XXX-XXXX

 Directory of C:\my_MATLAB_files

04/10/2012  12:08 PM <DIR>          .
04/10/2012  12:08 PM <DIR>          ..
04/21/2011  09:24 AM               171 base.mat
02/08/2010  05:14 PM                73 baseball.dat
04/10/2012  12:08 PM               474 collatz.asv
04/10/2012  11:56 AM               480 collatz.m
.
.
.
```

When you call a valid DOS command, `status` indicates success and `cmdout` contains the command output.

Save Unsuccessful DOS Command Status and Output

Attempt to execute a command called `foo`. Then, view the `status` and `results` output arguments.

```
[status,results] = dos('foo');
status, results
```

```
status =

     1


results =

'foo' is not recognized as an internal or external command,
operable program or batch file.
```

When you call an invalid DOS command, `status` indicates failure and `results` contains the DOS error message.

Display DOS Command Output in MATLAB Command Window

Display command output and prompts in the Command Window as the command executes, and also assign the command output to the `results` variable.

```
[status,results] = dos('comp', '-echo');
```

```
Name of first file to compare: collatz.m
collatz.m
Name of second file to compare: collatz.asv
collatz.asv
Option: /A
/A
Option:

Comparing collatz.m and collatz.asv...
Files compare OK

Compare more files (Y/N) ? N
N
```

```
>>
```

Input Arguments

`command` — MS-DOS command

character vector

MS-DOS command, specified as a character vector. The command can be a Windows UI program that opens a user interface, or a DOS console command that you typically run in a DOS command window. The command executes in a DOS shell, which might not be the shell from which you started MATLAB.

Example: `'dir'`

Output Arguments

`status` — Command exit status

0 | nonzero integer

Command exit status, returned as either `0` or a nonzero integer. When the command is successful, `status` is `0`. Otherwise, `status` is a nonzero integer.

- If `command` includes the ampersand character (&), then `status` is the exit status when `command` starts
- If `command` does not include the ampersand character (&), then `status` is the exit status upon `command` completion.

`cmdout` — Output of operating system command

character vector

Output of the operating system command, returned as a character vector. The system shell might not properly represent non-Unicode characters.

Limitations

- MATLAB converts characters to the encoding that your operating system shell accepts. Output from the `command` is converted to the MATLAB encoding to be

displayed in the command window. If you get unexpected results from the command, enter the `command` argument directly at the operating system prompt to see how the operating system treats your input.

- MS-DOS does not support UNC path names. Therefore, if the current folder uses a UNC path name, then running `dos` with a DOS `command` that relies on the current folder fails. MATLAB returns this error:

  ```
  Error using dos
  DOS commands may not be executed when the current directory is a UNC pathname
  ```

  To work around this limitation, change the folder to a mapped drive before running `dos` or a function that calls `dos`.

Tips

- To execute the operating system command in the background, include the trailing character, `&`, in the `command` argument (for example, `'notepad &'`). The exit status is immediately returned to the `status` variable. This syntax is useful for console programs that require interactive user command input while they run, and that do not run correctly in the MATLAB Command Window.

  Note: If `command` includes the trailing `&` character, then `cmdout` is empty.

See Also

See Also

`computer` | `perl` | `system` | `unix` | `winopen`

Topics

`!` (exclamation point)

Introduced before R2006a

dot

Dot product

Syntax

```
C = dot(A,B)
C = dot(A,B,dim)
```

Description

`C = dot(A,B)` returns the scalar dot product of `A` and `B`.

- If `A` and `B` are vectors, then they must have the same length.
- If `A` and `B` are matrices or multidimensional arrays, then they must have the same size. In this case, the `dot` function treats `A` and `B` as collections of vectors. The function calculates the dot product of corresponding vectors along the first array dimension whose size does not equal 1.

`C = dot(A,B,dim)` evaluates the dot product of `A` and `B` along dimension, `dim`. The `dim` input is a positive integer scalar.

Examples

Dot Product of Real Vectors

Create two simple, three-element vectors.

```
A = [4 -1 2];
B = [2 -2 -1];
```

Calculate the dot product of `A` and `B`.

```
C = dot(A,B)
```

```
C = 8
```

The result is `8` since

```
C = A(1)*B(1) + A(2)*B(2) + A(3)*B(3)
```

Dot Product of Complex Vectors

Create two complex vectors.

```
A = [1+i 1-i -1+i -1-i];
B = [3-4i 6-2i 1+2i 4+3i];
```

Calculate the dot product of A and B.

```
C = dot(A,B)
```

```
C =
   1.0000 - 5.0000i
```

The result is a complex scalar since A and B are complex. In general, the dot product of two complex vectors is also complex. An exception is when you take the dot product of a complex vector with itself.

Find the inner product of A with itself.

```
D = dot(A,A)
```

```
D = 8
```

The result is a real scalar. The inner product of a vector with itself is related to the Euclidean length of the vector, `norm(A)`.

Dot Product of Matrices

Create two matrices.

```
A = [1 2 3;4 5 6;7 8 9];
B = [9 8 7;6 5 4;3 2 1];
```

Find the dot product of A and B.

```
C = dot(A,B)
```

```
C =

    54    57    54
```

The result, `C`, contains three separate dot products. `dot` treats the columns of `A` and `B` as vectors and calculates the dot product of corresponding columns. So, for example, `C(1) = 54` is the dot product of `A(:,1)` with `B(:,1)`.

Find the dot product of `A` and `B`, treating the *rows* as vectors.

```
D = dot(A,B,2)
```

```
D =

    46
    73
    46
```

In this case, `D(1) = 46` is the dot product of `A(1,:)` with `B(1,:)`.

Dot Product of Multidimensional Arrays

Create two multidimensional arrays.

```
A = cat(3,[1 1;1 1],[2 3;4 5],[6 7;8 9])
```

```
A =

(:,:,1) =

     1     1
     1     1


(:,:,2) =

     2     3
     4     5


(:,:,3) =

     6     7
     8     9
```

```
B = cat(3,[2 2;2 2],[10 11;12 13],[14 15; 16 17])
```

```
B =

(:,:,1) =

     2     2
     2     2


(:,:,2) =

    10    11
    12    13


(:,:,3) =

    14    15
    16    17
```

Calculate the dot product of `A` and `B` along the third dimension (`dim = 3`).

```
C = dot(A,B,3)
```

```
C =

   106   140
   178   220
```

The result, `C`, contains four separate dot products. The first dot product, `C(1,1) = 106`, is equal to the dot product of `A(1,1,:)` with `B(1,1,:)`.

Input Arguments

`A,B` — Input arrays
numeric arrays

Input arrays, specified as numeric arrays.

Data Types: `single` | `double`

Complex Number Support: Yes

`dim` — Dimension to operate along
positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, the default is the first array dimension whose size does not equal 1.

Consider two 2-D input arrays, `A` and `B`:

- `dot(A,B,1)` treats the columns of `A` and `B` as vectors and returns the dot products of corresponding columns.
- `dot(A,B,2)` treats the rows of `A` and `B` as vectors and returns the dot products of corresponding rows.

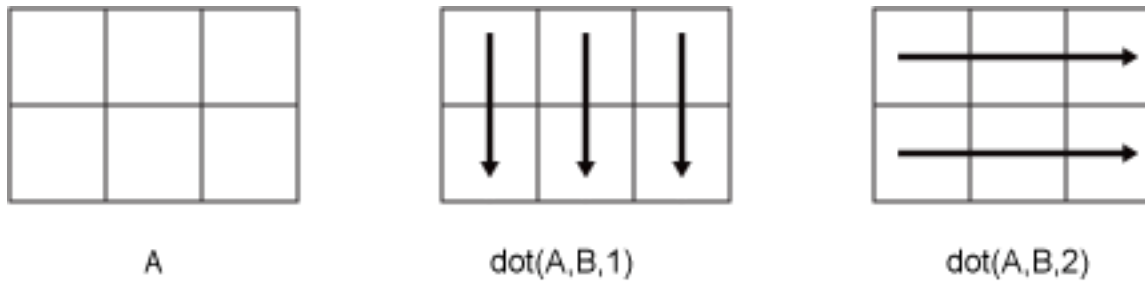

`dot` returns `conj(A).*B` if `dim` is greater than `ndims(A)`.

Definitions

Scalar Dot Product

The scalar dot product of two real vectors of length n is equal to

$$u \bullet v = \sum_{i=1}^{n} u_i v_i = u_1 v_1 + u_2 v_2 + \ldots + u_n v_n .$$

This relation is commutative for real vectors, such that `dot(u,v)` equals `dot(v,u)`. If the dot product is equal to zero, then u and v are perpendicular.

For complex vectors, the dot product involves a complex conjugate. This ensures that the inner product of any vector with itself is real and positive definite.

$$u \bullet v = \sum_{i=1}^{n} \bar{u}_i v_i .$$

Unlike the relation for real vectors, the complex relation is not commutative, so `dot(u,v)` equals `conj(dot(v,u))`.

Algorithms

- When inputs `A` and `B` are real or complex vectors, the `dot` function treats them as column vectors and `dot(A,B)` is the same as `sum(conj(A).*B)`.
- When the inputs are matrices or multidimensional arrays, the `dim` argument determines which dimension the `sum` function operates on. In this case, `dot(A,B)` is the same as `sum(conj(A).*B,dim)`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

For the syntax `dot(A,B)`, the arrays `A` and `B` must have the same size, even if they are vectors.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`conj` | `cross` | `sum`

Introduced before R2006a

double

Convert to double precision

Syntax

```
double(x)
```

Description

`double(x)` returns the double-precision value for `X`. If `X` is already a double-precision array, `double` has no effect.

Tips

The `double` function can be overloaded for any object when it makes sense to convert it to a double-precision value.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cast` | `single` | `str2double` | `typecast`

Topics

"Floating-Point Numbers"

Introduced before R2006a

dragrect

Drag rectangles with mouse

Syntax

```
[finalrect] = dragrect(initialrect)
[finalrect] = dragrect(initialrect,stepsize)
```

Description

`[finalrect] = dragrect(initialrect)` tracks one or more rectangles anywhere on the screen. The n-by-4 matrix `initialrect` defines the rectangles. Each row of `initialrect` must contain the initial rectangle position as `[left bottom width height]` values. `dragrect` returns the final position of the rectangles in `finalrect`.

`[finalrect] = dragrect(initialrect,stepsize)` moves the rectangles in increments of `stepsize`. The lower left corner of the first rectangle is constrained to a grid of size equal to `stepsize` starting at the lower left corner of the figure, and all other rectangles maintain their original offset from the first rectangle.

`[finalrect] = dragrect(...)` returns the final positions of the rectangles when the mouse button is released. The default step size is `1`.

Examples

Drag a rectangle with dimensions of 50-by-100 pixels.

```
waitforbuttonpress
point1 = get(gcf,'CurrentPoint') % button down detected
rect = [point1(1,1) point1(1,2) 50 100]
[r2] = dragrect(rect)
```

Definitions

Pixels

Distances in pixels are independent of your system resolution on Windows and Macintosh systems:

- On Windows systems, a pixel is 1/96th of an inch.
- On Macintosh systems, a pixel is 1/72nd of an inch.

On Linux systems, the size of a pixel is determined by your system resolution.

Tips

`dragrect` returns immediately if a mouse button is not currently pressed. Use `dragrect` in a `ButtonDownFcn`, or from the command line in conjunction with `waitforbuttonpress`, to ensure that the mouse button is down when `dragrect` is called. `dragrect` returns when you release the mouse button.

If the drag ends over a figure window, the positions of the rectangles are returned in that figure's coordinate system. If the drag ends over a part of the screen not contained within a figure window, the rectangles are returned in the coordinate system of the figure over which the drag began.

Note: You cannot use normalized figure units with `dragrect`.

See Also

`rbbox` | `waitforbuttonpress`

Introduced before R2006a

drawnow

Update figures and process callbacks

Syntax

```
drawnow
drawnow limitrate
drawnow nocallbacks
drawnow limitrate nocallbacks
```

```
drawnow update
drawnow expose
```

Description

`drawnow` updates figures and processes any pending callbacks. Use this command if you modify graphics objects and want to see the updates on the screen immediately.

`drawnow limitrate` limits the number of updates to 20 frames per second. If it has been fewer than 50 milliseconds since the last update, or if the graphics renderer is busy with the previous change, then `drawnow` discards the new updates. Use this command if you are updating graphics objects in a loop and do not need to see every update on the screen. Skipping updates can create faster animations. Pending callbacks are processed, so you can interact with figures during animations.

`drawnow nocallbacks` defers callbacks, such as the `ButtonDownFcn` callback, until the next full `drawnow` command. Use this option if you want to prevent callbacks from interrupting your code. Deferring callbacks temporarily disables figure interactions, such as mouse clicks or resizing the figure. Deferring callbacks does not affect animation speed.

`drawnow limitrate nocallbacks` limits the number of updates to 20 frames per second and skips updates if the renderer is busy. This syntax also prevents callbacks from interrupting your code, which temporarily disables figure interactions.

`drawnow update` skips updates if the renderer is busy and defers callbacks. This syntax is not recommended. Use the `limitrate` option instead.

`drawnow expose` updates figures, but defers callbacks. This syntax is not recommended. Use the `nocallbacks` option instead.

Examples

Create Animation of Streaming Data

Create an animation of a line growing as it accumulates 2,000 data points. Use `drawnow` to display the changes on the screen after each iteration through the loop.

```
h = animatedline;
axis([0 4*pi -1 1])
x = linspace(0,4*pi,2000);

for k = 1:length(x)
    y = sin(x(k));
    addpoints(h,x(k),y);
    drawnow
end
```

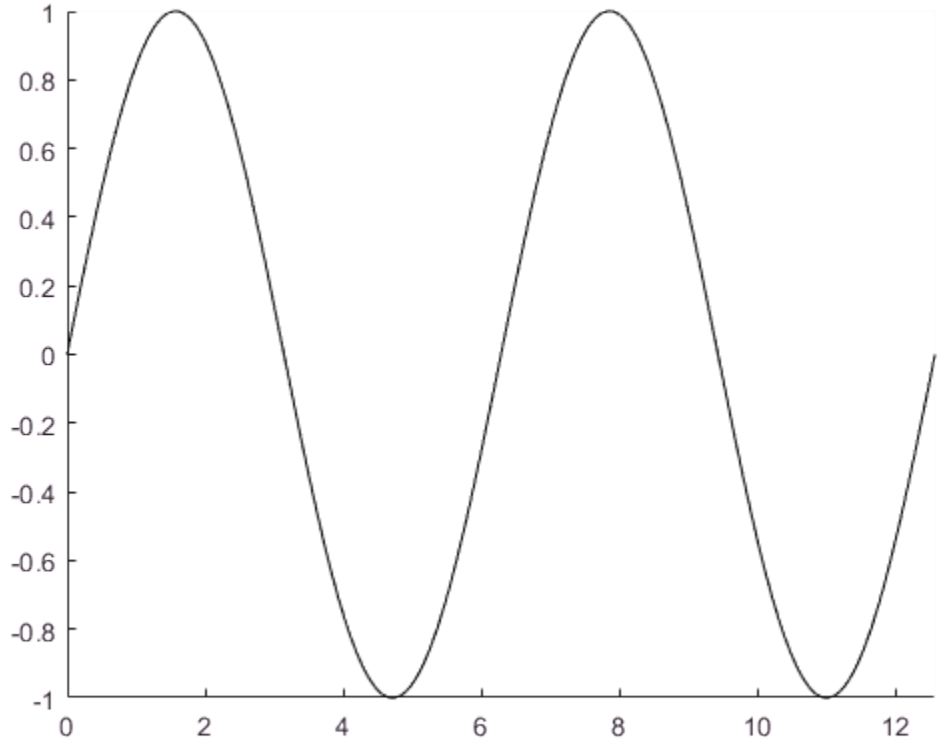

Skip Updates for Faster Animation

Create an animation of a line growing as it accumulates 10,000 points. Since there are 10,000 points, drawing each update on the screen is slow. Create a faster, smooth animation by limiting the number of updates using `drawnow limitrate`. Then, display the final updates on the screen by calling `drawnow` after the loop ends.

```
h = animatedline;
axis([0 4*pi -1 1])
x = linspace(0,4*pi,10000);

for k = 1:length(x)
    y = sin(x(k));
```

```
    addpoints(h,x(k),y);
    drawnow limitrate
end
```

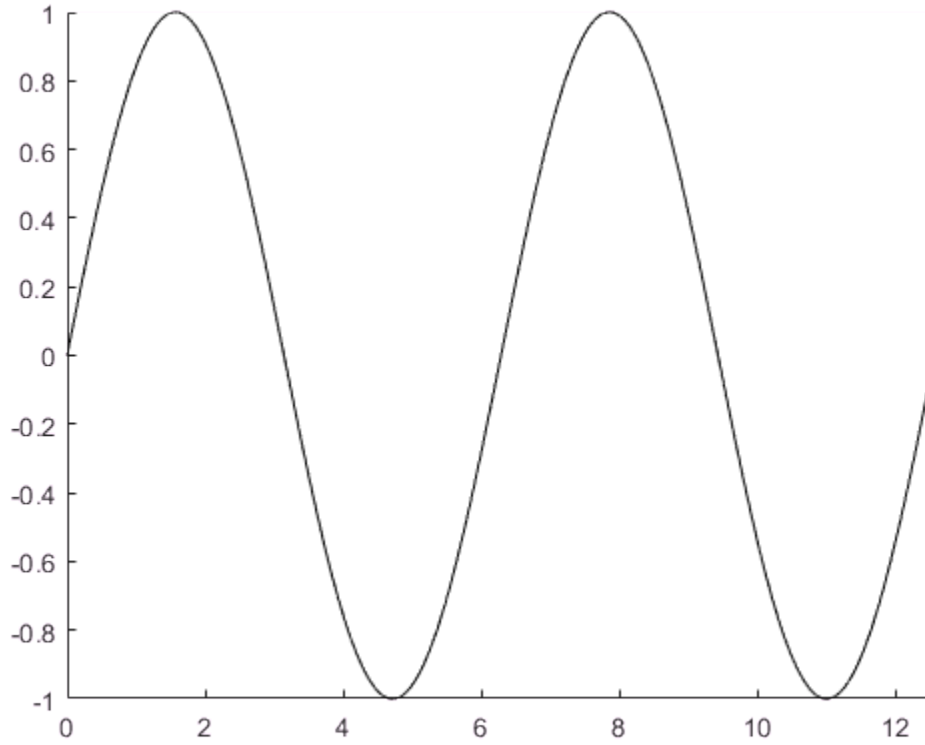


```
drawnow
```

Precompute Data, Then Create Animation

Compute all the data before the animation loop.

```
h = animatedline;
axis([0 4*pi -1 1])
x = linspace(0,4*pi,10000);
```

```
y = sin(x);

for k = 1:length(x)
    addpoints(h,x(k),y(k));
    drawnow limitrate
end
```

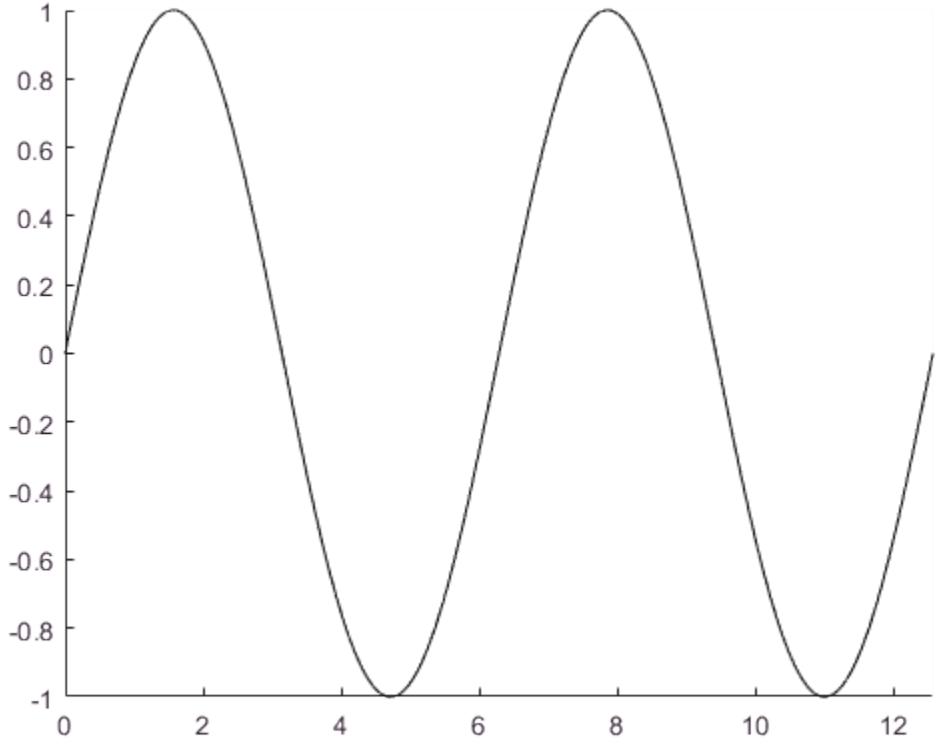


```
drawnow
```

If you have long computations, precomputing the data can improve perfomance. Precomputing minimizes the computation time by letting the computation run without interruptions. Additionally, it helps ensure a smooth animation by focusing on only graphics code in the animation loop.

Definitions

Actions Equivalent to `drawnow`

These actions are equivalent to calling a full `drawnow` command:

- Returning to the MATLAB prompt.
- Using the `getframe`, `pause`, and `waitfor` functions.
- Using functions that wait for user input, such as `waitforbuttonpress`, `input`, `keyboard`, or `ginput`.

Tips

- The `nocallbacks` option always adds interrupting callbacks to the queue. If you want to discard interrupting callbacks, then use the `Interruptible` and `BusyAction` properties instead.

See Also

See Also

`pause` | `refreshdata` | `waitfor`

Introduced before R2006a

dsearchn

N-D nearest point search

Syntax

```
k = dsearchn(X,T,XI)
k = dsearchn(X,T,XI,outval)
k = dsearchn(X,XI)
[k,d] = dsearchn(X,...)
```

Description

`k = dsearchn(X,T,XI)` returns the indices `k` of the closest points in `X` for each point in `XI`. `X` is an `m`-by-`n` matrix representing `m` points in n-dimensional space. `XI` is a `p`-by-`n` matrix, representing `p` points in n-dimensional space. `T` is a `numt`-by-`n+1` matrix, a triangulation of the data `X` generated by `delaunayn`. The output `k` is a column vector of length `p`.

`k = dsearchn(X,T,XI,outval)` returns the indices `k` of the closest points in `X` for each point in `XI`, unless a point is outside the convex hull. If `XI(J,:)` is outside the convex hull, then `K(J)` is assigned `outval`, a scalar double. `Inf` is often used for `outval`. If `outval` is `[]`, then `k` is the same as in the case `k = dsearchn(X,T,XI)`.

`k = dsearchn(X,XI)` performs the search without using a triangulation. With large `X` and small `XI`, this approach is faster and uses much less memory.

`[k,d] = dsearchn(X,...)` also returns the distances `d` to the closest points. `d` is a column vector of length `p`.

Algorithms

`dsearchn` is based on Qhull [1]. For information about Qhull, see http://www.qhull.org/. For copyright information, see http://www.qhull.org/COPYING.txt.

References

[1] Barber, C. B., D.P. Dobkin, and H.T. Huhdanpaa, “The Quickhull Algorithm for Convex Hulls,” ACM Transactions on Mathematical Software, Vol. 22, No. 4, Dec. 1996, p. 469–483.

See Also

delaunayTriangulation

Introduced before R2006a

duration

Create duration array from numeric values

The `duration` function creates an array that represents elapsed time in units of fixed length, such as hours, minutes, and seconds. You also can create elapsed times in terms of fixed-length (24-hour) days and fixed-length (365.2425-day long) years.

Syntax

```
D = duration(H,MI,S)
D = duration(H,MI,S,MS)
D = duration(X)

D = duration( ___ ,'Format',displayFormat)
```

Description

`D = duration(H,MI,S)` creates a duration array from numeric arrays containing the number of hours, minutes, and seconds specified by `H`, `MI`, and `S`, respectively.

`D = duration(H,MI,S,MS)` creates a duration array from numeric arrays containing the number of hours, minutes, second, and milliseconds specified by `H`, `MI`, `S`, and `MS`, respectively.

`D = duration(X)` creates a column vector of durations from a numeric matrix.

`D = duration( ___ ,'Format',displayFormat)` additionally specifies the format in which `D` displays. You can use this syntax with any of the arguments from the previous syntaxes.

Examples

Create Duration Array with Default Format

```
D = duration(1,30:33,0)
```

```
D = 1×4 duration array
   01:30:00   01:31:00   01:32:00   01:33:00
```

Create Duration Array and Specify Format

Create a `duration` array from a matrix and display the values in units of fractional hours.

```
X = magic(3);
D = duration(X,'Format','h')
```

```
D = 3×1 duration array
   8.0183 hr
   3.0853 hr
   4.1506 hr
```

Input Arguments

`H,MI,S` — Hour, minute, and second arrays
scalar | vector | matrix | multidimensional array

Hour, minute, and second arrays specified as a scalar, vector, matrix or multidimensional array. These arrays must be the same size, or any one can be a scalar.

Example: `12,45,07.451`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`H,MI,S,MS` — Hour, minute, second, and millisecond arrays
scalar | vector | matrix | multidimensional array

Hour, minute, second, and millisecond arrays, each specified as a scalar, vector, matrix or multidimensional array. The arrays must be the same size, or any one can be a scalar.

Example: `12,45,30,35`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

X — Input matrix

matrix

Input matrix, specified in the form `[H,M,S]`.

Example: `[1,30,0]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

displayFormat — Display format of D

`'hh:mm:ss'` (default) | character vector

Display format of `D`, the duration array, specified as a character vector. The `displayFormat` value does not change the duration values in `D`, only their display.

To display a duration as a single number that includes a fractional part (for example, 1.234 hours), specify one of the following character vectors.

Value of `displayFormat`	Description
`'y'`	Number of exact fixed-length years. A fixed-length year is equal to 365.2425 days.
`'d'`	Number of exact fixed-length days. A fixed-length day is equal to 24 hours.
`'h'`	Number of hours
`'m'`	Number of minutes
`'s'`	Number of seconds

To display a duration in the form of a digital timer, specify one of the character vectors:

- `'dd:hh:mm:ss'`
- `'hh:mm:ss'`
- `'mm:ss'`
- `'hh:mm'`

In addition, you can display up to nine fractional second digits by appending up to nine `S` characters. For example, `'hh:mm:ss.SSS'` displays the milliseconds of a duration value to three digits.

Data Types: `char`

Output Arguments

D — Output duration
`duration` array

Output duration, returned as a `duration` array.

You can change the display format of a duration by modifying the `Format` property. For example, to display the duration, `D`, as a number of minutes, type:

```
D.Format = 'm'
```

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also
`calendarDuration`

Topics
“Represent Dates and Times in MATLAB”

Introduced in R2014b

DurationRuler Properties

Control axis with duration values

Description

`DurationRuler` properties control the appearance and behavior of an *x*-axis, *y*-axis, or *z*-axis that shows duration values. Each individual axis has its own ruler object. By changing property values of the ruler, you can modify certain aspects of a specific axis.

Use dot notation to refer to a particular ruler and property. Access the ruler objects through the `XAxis`, `YAxis`, and `ZAxis` properties of the `Axes` object.

```
ax = gca;
co = ax.XAxis.Color;
ax.XAxis.Color = 'blue';
```

Appearance

`Color` — Color of axis line and labels

RGB triplet | character vector of a color name | `'none'`

Color of the axis line and labels, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the axis is invisible.

Example: `ax.XAxis.Color = 'red';`

Example: `ax.YAxis.Color = [0.1 0.7 0.8];`

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`

Long Name	Short Name	RGB Triplet
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Note: The `Color` property for the ruler and the associated `XColor`, `YColor`, or `ZColor` property for the parent axes always have the same value. Setting one also sets the other.

`LineWidth` — Width of axis line and tick marks

`0.5` (default) | positive value

Width of axis line and tick marks, specified as a positive value in point units. One point equals 1/72 inch.

Example: `ax.XAxis.LineWidth = 2;`

Note: Setting the `LineWidth` property for the parent axes sets the `LineWidth` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

`Label` — Axis label

text object (default)

Axis label, which is a text object. To display text or change existing text, set the `String` property for the text object. Use other properties to change the text appearance, such as the font style or color.

```
ax = gca;
ax.XAxis.Label.String = 'X Axis';
ax.XAxis.Label.FontSize = 12;
```

For a full list of options, see Text Properties.

Alternatively, add or modify the axis labels using the `xlabel`, `ylabel`, and `zlabel` functions.

Note: The text object is not a child of the ruler object, so it cannot be returned by `findobj` and it does not use the default text property values.

`Visible` — Axis visibility

`'on'` (default) | `'off'`

Axis visibility, specified as one of these values:

- `'on'` — Display the axis.
- `'off'` — Hide the axis without deleting it. You still can access properties of an invisible axis using the ruler object.

Example: `ax.XAxis.Visible = 'off';`

Scale and Direction

`Limits` — Minimum and maximum axis limits

`[0 1]` (default) | two-element vector of the form `[min max]`

Minimum and maximum axis limits, specified as a two-element vector of the form `[min max]`, where `min` and `max` are duration values. For example:

```
d = duration(1,40:45,0);
y = rand(6,1);
plot(d,y)
ax = gca;
ax.XAxis.Limits = [d(2) d(5)];
```

You can specify both limits, or specify one limit and let the ruler automatically calculate the other.

- To use an automatically calculated minimum limit, set the first element to `-inf`.
- To use an automatically calculated maximum limit, set the second element to `inf`.

Alternatively, set the limits using the `xlim`, `ylim`, and `zlim` functions.

If you assign a value to this property, then MATLAB sets the associated mode to `'manual'`.

Note: The `Limits` property for the ruler and the associated `XLim`, `YLim`, or `ZLim` property for the parent axes always have the same value. Setting one also sets the other.

`LimitsMode` — Selection mode for `Limits` property

`'auto'` (default) | `'manual'`

Selection mode for the `Limits` property, specified as one of these values:

- `'auto'` — Automatically select the axis limits based on the data plotted.
- `'manual'` — Use axis limit values that you specify. To specify the axis limits, set the `Limits` property.

Note: The `LimitsMode` property for the ruler and the associated `XLimMode`, `YLimMode`, or `ZLimMode` property for the parent axes always have the same value. Setting one also sets the other.

`Scale` — Scale of values along axis

`'linear'` (default)

Scale of values along axis, returned as `'linear'`. `DurationRuler` objects do not support log scales.

`Direction` — Direction of increasing values

`'normal'` (default) | `'reverse'`

Direction of increasing values, specified as one of these values:

- `'normal'` — Values increase from left to right or bottom to top.
- `'reverse'` — Values increase from right to left or top to bottom.

Note: The `Direction` property for the ruler and the associated `XDir`, `YDir`, or `ZDir` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.Direction = 'reverse';`

Tick Values and Labels

`TickValues` — Tick mark locations along the axis

[ ] (default) | vector of duration values

Tick mark locations along the axis, specified as a vector of duration values. For example:

```
d = duration(1,40:45,0);
y = rand(6,1);
plot(d,y)
ax = gca;
ax.XAxis.TickValues = [d(1) d(3) d(5)];
```

If you assign a value to this property, then MATLAB sets the `TickValuesMode` property to `'manual'`.

Alternatively, use the `xticks`, `yticks`, and `zticks` functions.

Note: The `TickValues` property for the ruler and the associated `XTick`, `YTick`, or `ZTick` property for the parent axes always have the same value. Setting one also sets the other.

`TickValuesMode` — Selection mode for `TickValues` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickValues` property, specified as one of these values:

- `'auto'` — Automatically select the tick values based on the data plotted.
- `'manual'` — Use tick values that you specify. To specify the values, set the `TickValues` property.

Note: The `TickValuesMode` property for the ruler and the associated `XTickMode`, `YTickMode`, or `ZTickMode` property for the parent axes always have the same value. Setting one also sets the other.

`Exponent` — Exponential notation common to all tick values

integer value

Exponential notation common to all tick values, specified as an integer value. The `Exponent` property applies only to tick labels that show a single unit of time, such as seconds, minutes, or hours. It does not apply to tick labels that show mixed units of time. When applicable, the ruler displays an exponent label showing the base and exponent value.

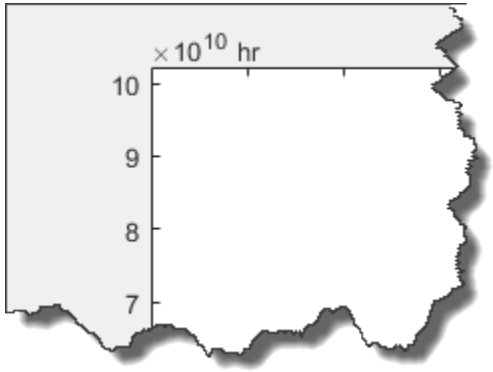

The base value is always 10. You can change the exponent value by setting the `Exponent` property. If the exponent value is `0`, then the exponent label is not displayed.

For example, this code changes the exponent value to 8.

```
x = hours((1:10)*1e10);
plot(x,1:10)
ax = gca;
ax.XAxis.Exponent = 8;
```

If you assign a value to this property, then MATLAB sets the `ExponentMode` property to `'manual'`.

`ExponentMode` — Selection mode for `Exponent` property

`'auto'` (default) | `'manual'`

Selection mode for the `Exponent` property, specified as one of these values:

- `'auto'` — Automatically select the exponent value based on the axis limits.
- `'manual'` — Use an exponent value that you specify. To specify the value, set the `Exponent` property.

`TickLabels` — Tick mark labels

`''` (default) | cell array of character vectors | string array

Tick mark labels, specified as a cell array of character vectors or a string array. If you do not specify enough labels for all of the tick values, then the labels repeat. The labels support TeX and LaTeX markup. See the `TickLabelInterpreter` property for more information.

Example: `ax.XAxis.TickLabels = {'January','February','March','April','May'}';`

Example: `ax.YAxis.TickLabels = {'\pi','2\pi','3\pi'}'`

If you set this property, then MATLAB sets the `TickLabelsMode` property to `'manual'`.

Alternatively, specify the tick labels using the `xticklabels`, `yticklabels`, and `zticklabels` functions.

Note: The `TickLabels` property for the ruler and the associated `XTickLabel`, `YTickLabel`, or `ZTickLabel` property for the parent axes always have the same value. Setting one also sets the other.

Data Types: `char` | `string`

`TickLabelsMode` — Selection mode for `TickLabels` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickLabels` property, specified as one of these values:

- `'auto'` — Automatically select the tick labels.
- `'manual'` — Use tick labels that you specify. To specify the labels, set the `TickLabels` property.

Note: The `TickLabelsMode` property for the ruler and the associated `XTickLabelMode`, `YTickLabelMode`, or `ZTickLabelMode` property for the parent axes always have the same value. Setting one also sets the other.

`TickLabelInterpreter` — Interpretation of tick label characters

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of tick label characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

Note: Setting the `TickLabelInterpreter` property for the parent axes sets the `TickLabelInterpreter` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.TickLabelInterpreter = 'latex';`

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the text type and color, and include special characters in the text.

This table lists the supported modifiers with the `TickLabelInterpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the text within the curly braces `{}`.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (rarely available)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Set `specifier` as the name of a font family to change the font style. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Set `specifier` as a scalar numeric value to change the font size.	`'\fontsize{15} text'`

Modifier	Description	Example
`\color{specifier}`	Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Set `specifier` as a three-element RGB triplet to change the font color.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒
`\lambda`	λ	`\Phi`	Φ	`\downarrow`	↓
`\mu`	μ	`\Psi`	Ψ	`\circ`	°
`\nu`	ν	`\Omega`	Ω	`\pm`	±

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `TickLabelInterpreter` property to `'latex'`. Use dollar symbols around the labels, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$\int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup within the text. The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this is reduced by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

`TickLabelFormat` — Tick label format

character vector

Tick label format, specified as a character vector.

To display a duration as a single number that includes a fractional part (for example, 1.234 hours), specify one of the following formats.

Format	Description
`'y'`	Number of exact, fixed-length years. A fixed-length year is equal to 365.2425 days.
`'d'`	Number of exact, fixed-length days. A fixed-length day is equal to 24 hours.
`'h'`	Number of hours
`'m'`	Number of minutes
`'s'`	Number of seconds

To display a duration in the form of a digital timer, specify one of these formats:

- `'dd:hh:mm:ss'`
- `'hh:mm:ss'`
- `'mm:ss'`
- `'hh:mm'`

In addition, you can display up to nine fractional second digits by appending up to nine `S` characters. For example, `'hh:mm:ss.SSS'` displays the milliseconds of a duration value to three digits.

`TickLabelFormatMode` — Selection mode for `TickLabelFormat` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickLabelFormat` property, specified as one of these values:

- `'auto'` — Automatically select the tick label format.
- `'manual'` — Use a tick label format that you specify. To specify the format, set the `TickLabelFormat` property.

`TickLabelRotation` — Rotation of tick labels

scalar value in degrees

Rotation of tick labels, specified as a scalar value in degrees. Positive values give counterclockwise rotation. Negative values give clockwise rotation.

Alternatively, you can rotate the tick labels using the `xtickangle`, `ytickangle`, and `ztickangle` functions.

Note: The `TickLabelRotation` property for the ruler and the associated `XTickLabelRotation`, `YTickLabelRotation`, or `ZTickLabelRotation` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.TickLabelRotation = 45;`

Example: `ax.YAxis.TickLabelRotation = -45;`

`TickLabelRotationMode` — Selection mode for `TickLabelRotation` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickLabelRotation` property, specified as one of these values:

- `'auto'` — Automatically select the tick label rotation.
- `'manual'` — Use a tick label rotation that you specify. To specify the rotation, set the `TickLabelRotation` property.

`TickDirection` — Tick mark direction

`'in'` (default) | `'out'` | `'both'`

Tick mark direction, specified as one of these values:

- `'in'` — Direct the tick marks inward from the axis lines. This is the default for 2-D views.
- `'out'` — Direct the tick marks outward from the axis lines. This is the default for 3-D views.
- `'both'` — Center the tick marks over the axis lines.

If you assign a value to this property, then MATLAB sets the `TickDirectionMode` property to `'manual'`.

Note: Setting the `TickDir` property for the parent axes sets the `TickDirection` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.YAxis.TickDirection = 'out';`

`TickDirectionMode` — Selection mode for `TickDirection` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickDirection` property, specified as one of these values:

- `'auto'` — Automatically select the tick direction.
- `'manual'` — Use a tick direction that you specify. To specify the tick direction, set the `TickDirection` property.

`TickLength` — Tick mark length

two-element vector

Tick mark length, specified as a two-element vector of the form `[2Dlength 3Dlength]`. The first element is the tick mark length in 2-D views. The second element is the tick mark length in 3-D views. Specify the values in units normalized relative to the longest axes dimension.

Note: Setting the `TickLength` property for the parent axes sets the `TickLength` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.YAxis.TickLength = [0.02 0.035];`

`MinorTick` — Minor tick mark display

`'off'` (default) | `'on'`

Minor tick mark display, specified as one of these values:

- `'off'` — Do not display minor tick marks. This is the default value for an axis with a linear scale.

- `'on'` — Display minor tick marks between the major tick marks on the axis. This is the default value for an axis with a log scale. The space between the major tick marks determines the number of minor tick marks. If the `MinorTickValues` property is set to empty `[]`, then no minor tick marks appear. Specify the tick mark locations by setting the `MinorTickValues` property.

Note: The `MinorTick` property for the ruler and the associated `XMinorTick`, `YMinorTick`, or `ZMinorTick` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.MinorTick = 'on';`

`MinorTickValues` — Minor tick mark locations

`[]` (default) | vector of increasing values

Minor tick mark locations, specified as a vector of increasing duration values.

If you assign values to this property, then MATLAB sets the `MinorTickValuesMode` property to `'manual'`.

`MinorTickValuesMode` — Selection mode for `MinorTickValues` property

`'auto'` (default) | `'manual'`

Selection mode for the `MinorTickValues` property, specified as one of these values:

- `'auto'` — Use automatically calculated minor tick values.
- `'manual'` — Use minor tick values that you specify. To specify the values, set the `MinorTickValues` property.

Font

`FontName` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as a system supported font name or `'FixedWidth'`. The default font depends on the specific system and locale. To use a fixed-width font that renders well, specify `'FixedWidth'`. The actual fixed-width font used depends on the `FixedWidthFontName` property of the root object.

Note: Setting the `FontName` property for the parent axes sets the `FontName` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontName = 'Cambria';`

`FontSize` — Font size

`10` (default) | scalar numeric value

Font size, specified as a scalar numeric value.

Note: Setting the `FontSize` property for the parent axes sets the `FontSize` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontSize = 12;`

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font.
- `'bold'` — Thicker character outlines than normal.

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: Setting the `FontWeight` property for the parent axes sets the `FontWeight` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontWeight = 'bold';`

`FontAngle` — Text character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font can look the same as the normal font.

Note: Setting the `FontAngle` property for the parent axes sets the `FontAngle` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontAngle = 'italic';`

`FontSmoothing` — Text antialiasing

`'on'` (default) | `'off'`

Text smoothing, specified as one of these values:

- `'on'` — Enable text antialiasing to reduce the jagged appearance of text characters and make the text easier to read. In certain cases, smoothed text blends against the background color and can make the text appear blurry.
- `'off'` — Disable text antialiasing. Use this setting if the text seems blurry.

Note: Setting the `FontSmoothing` property for the parent axes sets the `FontSmoothing` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontSmoothing = 'off';`

Parent/Child

`Parent` — Ruler parent

`Axes` object

Ruler parent, specified as an `Axes` object.

Note: Ruler objects are not listed in the `Children` property of the parent `Axes` object.

`Children` — Ruler children

empty `GraphicsPlaceholder` array

The ruler has no children. You cannot set this property.

See Also

See Also

Axes Properties

Introduced in R2016b

dynamicprops class

Superclasses: handle

Superclass for classes that support dynamic properties

Description

`dynamicprops` is an abstract class derived from the handle class. Subclass `dynamicprops` to define classes that support dynamic properties.

`classdef` *`MyClass`* `<` `dynamicprops` makes *`MyClass`* a subclass of the `dynamicprops` class. Classes derived from `dynamicprops` can create objects that support dynamic properties (also know as instance properties). Dynamic properties are associated with a specific object of the class, but are not part of the class definition. Use dynamic properties to attach temporary data to objects.

Note: The `isequal` function always returns `false` when comparing objects that have dynamic properties, even if the properties have the same name and value. If you need to compare objects that contain dynamic properties, overload `isequal` for your class.

Methods

This class defines one method `addprop` and, as a subclass of the `handle` class, inherits all the `handle` class methods.

addprop	Add dynamic property

Events

`PropertyAdded`	Triggered when a property is added `NotifyAccess = private`, `ListenAccess = public`

`PropertyRemoved`	Triggered when a property is removed `NotifyAccess = private`, `ListenAccess = public`
`ObjectBeingDestroyed`	Triggered when the object is destroyed `NotifyAccess = private`, `ListenAccess = public`

Event Data

The `PropertyAdded` and `PropertyRemoved` events pass event.DynamicPropertyEvent objects to listeners.

Property	Value
`PropertyName`	Name of property being added or removed
`Source`	Object that is the source of the event
`EventName`	Name of event

Attributes

`ConstructOnLoad`	`true`
`HandleCompatible`	`true`

To learn about attributes of classes, see Class Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Subclass dynamicprops

Derive a class from the `dynamicprops` class:

```
classdef MyClass < dynamicprops
   ...
```

end

See Also

See Also

handle

Topics

"Dynamic Property Events"
Class Attributes
Property Attributes

Introduced in R2008a

echo

Display statements during function execution

Syntax

```
echo on
echo off
echo
echo fcnname on
echo fcnname off
echo fcnname
echo on all
echo off all
```

Description

The `echo` command controls the display (or *echoing*) of statements in a function during their execution. Normally, statements in a function file are not displayed on the screen during execution. Command echoing is useful for debugging or for demonstrations, allowing the commands to be viewed as they execute.

The `echo` command behaves in a slightly different manner for script files and function files. For script files, the use of `echo` is simple; echoing can be either `on` or `off`, in which case any script used is affected.

`echo on` turns on the echoing of commands in all script files.

`echo off` turns off the echoing of commands in all script files.

`echo` toggles the echo state.

When you turn on echoing for a script or function file, each line in the file is displayed as it is executed. Since this results in inefficient execution, use `echo` only for debugging.

`echo fcnname on` turns on echoing of the named function file.

`echo fcnname off` turns off echoing of the named function file.

`echo` *`fcnname`* toggles the echo state of the named function file.

`echo on all` sets echoing on for all function files.

`echo off all` sets echoing off for all function files.

Tips

- To avoid confusing syntax, do not use `on` or `off` as a function name.

See Also

`function`

Introduced before R2006a

echodemo

Run example script step-by-step in Command Window

Syntax

```
echodemo filename
echodemo(filename,index)
```

Description

`echodemo filename` runs the script specified by `filename` step-by-step in the Command Window. The file must contain sections defined with two percent signs (%%) to enable pausing after each step. At each step, you can click links in the Command Window to proceed or stop. If the Command Window is not large enough to show the links, scroll up to see them.

Caution: If variables in your base workspace have the same name as variables that the example file creates, the example could overwrite your data. Preserve your data by saving it to a MAT-file before running the example.

`echodemo(filename,index)` starts with the section number specified by `index`. If the example relies on results of previous steps, using this syntax can produce errors or unexpected results.

Examples

Run Example Script in Command Window

Run the Loma Prieta Earthquake example.

```
echodemo quake
```

Start Script from Specified Section

Start the Loma Prieta Earthquake example from the third section.

```
filename = 'quake';
index = 3;
echodemo(filename,index)
```

This code errors because the example requires variables created in earlier sections.

Input Arguments

`filename` — Script file name

character vector

Script file name, specified as a character vector.

When you use the function syntax for `echodemo` and specify its inputs within parentheses, enclose the `filename` input in single quotes.

`index` — Section index

scalar integer

Section index, specified as a scalar integer.

The link text in the Command Window shows the current section number, `n`, and the total number of sections, `m`, as `n/m`.

Tips

- Only use `echodemo` to display scripts, not functions. `echodemo` can run any script that you can execute, but only scripts with sections pause between steps.

See Also

See Also

`demo` | `doc` | `publish`

Introduced before R2006a

edgeAttachments

Class: TriRep

(Not recommended) Simplices attached to specified edges

Note: `edgeAttachments(TriRep)` is not recommended. Use edgeAttachments(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
SI = edgeAttachments(TR, V1, V2)
SI = edgeAttachments(TR, EDGE)
```

Description

`SI = edgeAttachments(TR, V1, V2)` returns the simplices `SI` attached to the edges specified by `(V1, V2)`. `(V1, V2)` represents the start and end vertices of the edges to be queried.

`SI = edgeAttachments(TR, EDGE)` specifies edges in matrix format.

Input Arguments

`TR`	Triangulation representation.
`V1,V2`	Column vectors of vertex indices into the array of points representing the vertex coordinates.
`EDGE`	Matrix specifying edge start and end points. `EDGE` is of size `m`-by-2, `m` being the number of edges to query.

Output Arguments

`SI`	Vector cell array of indices into the triangulation matrix. `SI` is a cell array because the number of simplices associated with each edge can vary.

Examples

Example 1

Load a 3-D triangulation to compute the tetrahedra attached to an edge.

```
load tetmesh
trep = TriRep(tet, X);
v1 = [15 21]';
v2 = [936 716]';
t1 = edgeAttachments(trep, v1, v2);
```

You can also specify the input as edges.

```
e = [v1 v2];
t2 = edgeAttachments(trep, e);
isequal(t1,t2);
```

Example 2

Create a triangulation with `DelaunayTri`.

```
x = [0 1 1 0 0.5]';
y = [0 0 1 1 0.5]';
dt = DelaunayTri(x,y);
```

Query the triangles attached to edge (1,5).

```
t = edgeAttachments(dt, 1,5);
t{:};
```

Definitions

Simplex

A simplex is a triangle/tetrahedron or higher dimensional equivalent.

See Also

triangulation | edges | delaunayTriangulation

edges

Class: TriRep

(Not recommended) Triangulation edges

Note: `edges(TriRep)` is not recommended. Use edges(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
E = edges(TR)
```

Description

`E = edges(TR)` returns the edges in the triangulation in an `n`-by-2 matrix. `n` is the number of edges. The vertices of the edges index into `TR.X`, the array of points representing the vertex coordinates.

Input Arguments

`TR`	Triangulation representation.

Output Arguments

`E`	Edge matrix.

Examples

Example 1

Load a 2-D triangulation.

```
load trimesh2d
trep = TriRep(tri, x,y);
```

Return all edges.

```
e = edges(trep);
```

Example 2

Query a 2-D `DelaunayTri`-generated triangulation.

```
X = rand(10,2);
dt = DelaunayTri(X);
e = edges(dt);
```

See Also

triangulation | edgeAttachments | delaunayTriangulation

edit

Edit or create file

Syntax

```
edit
edit file
edit file1 ... fileN
```

Description

`edit` opens a new file called `Untitled.m` in the Editor. MATLAB does not automatically save `Untitled.m`.

`edit file` opens the specified file in the Editor. If `file` does not already exist, MATLAB asks if you want to create it. `file` can include a partial path, complete path, relative path, or no path. If `file` includes a partial path or no path, `edit` will look for the file on the search path. You must have write permission to the path to create `file`, otherwise, MATLAB ignores the argument.

You must specify the extension to open `.mlx`, `.mat` and `.mdl` files. MATLAB cannot directly edit binary files, such as `.p` and `.mex` files.

`edit file1 ... fileN` opens each file, `file1 ... fileN`, in the Editor.

Examples

Open a New File

Create and open a new file titled `Untitled.m` in the MATLAB® Editor (or default editor). `Untitled.m` does not appear in your Current Folder.

```
edit
```

Create New Files

Create two new files in a new folder.

Create a file in a new directory using a character vector. A dialog box appears, asking if you want to create `new_script.m`. Select **Yes** to create and open `tests/new_script.m`.

```
mkdir tests
edit tests/new_script.m
```

Create a second file using a string. Select **Yes** to create and open `tests/new_script2.m`.

```
S = string('tests/new_script2.m');
edit(S)
```

Open Files

Create and open the files `file1`, `file2`, `file3`, and `file4` in sequence.

```
edit file1 file2 file3 file4
```

Input Arguments

`file` — Name of file

character vector | string

Name of file, specified as a character vector or string. If `file` specifies a path that contains a nonexistent folder, MATLAB throws an error. Specify multiple files on the same line by separating filenames with a space.

If `file` is overloaded (that is, appears in multiple folders on the search path), then include a partial path to edit the correct page, such as

```
edit folderName/file
```

If you do not specify the extension, then `edit` opens a file with the specified name and a `.m` extension.

```
edit name
```

If the file is part of a class or package, then either specify the path and extension, or separate the components of the name with periods, such as:

```
edit className.name
```

```
edit packageName.name
edit packageName.className.name
edit packageName.name
```

Data Types: `char` | `string`

See Also

See Also

`open` | `type`

Topics

"Editor/Debugger Preferences"

Introduced before R2006a

eig

Eigenvalues and eigenvectors

Syntax

```
e = eig(A)
[V,D] = eig(A)
[V,D,W] = eig(A)

e = eig(A,B)
[V,D] = eig(A,B)
[V,D,W] = eig(A,B)

[ ___ ] = eig(A,balanceOption)
[ ___ ] = eig(A,B,algorithm)

[ ___ ] = eig( ___ ,eigvalOption)
```

Description

`e = eig(A)` returns a column vector containing the eigenvalues of square matrix `A`.

`[V,D] = eig(A)` returns diagonal matrix `D` of eigenvalues and matrix `V` whose columns are the corresponding right eigenvectors, so that `A*V = V*D`.

`[V,D,W] = eig(A)` also returns full matrix `W` whose columns are the corresponding left eigenvectors, so that `W'*A = D*W'`.

The eigenvalue problem is to determine the solution to the equation $Av = \lambda v$, where A is an `n`-by-`n` matrix, v is a column vector of length `n`, and λ is a scalar. The values of λ that satisfy the equation are the eigenvalues. The corresponding values of v that satisfy the equation are the right eigenvectors. The left eigenvectors, w, satisfy the equation $w'A = \lambda w'$.

`e = eig(A,B)` returns a column vector containing the generalized eigenvalues of square matrices `A` and `B`.

`[V,D] = eig(A,B)` returns diagonal matrix `D` of generalized eigenvalues and full matrix `V` whose columns are the corresponding right eigenvectors, so that `A*V = B*V*D`.

`[V,D,W] = eig(A,B)` also returns full matrix `W` whose columns are the corresponding left eigenvectors, so that `W'*A = D*W'*B`.

The generalized eigenvalue problem is to determine the solution to the equation $Av = \lambda Bv$, where A and B are `n`-by-`n` matrices, v is a column vector of length `n`, and λ is a scalar. The values of λ that satisfy the equation are the generalized eigenvalues. The corresponding values of v are the generalized right eigenvectors. The left eigenvectors, w, satisfy the equation $w'A = \lambda w'B$.

`[ ___ ] = eig(A,balanceOption)`, where `balanceOption` is `'nobalance'`, disables the preliminary balancing step in the algorithm. The default for `balanceOption` is `'balance'`, which enables balancing. The `eig` function can return any of the output arguments in previous syntaxes.

`[ ___ ] = eig(A,B,algorithm)`, where `algorithm` is `'chol'`, uses the Cholesky factorization of `B` to compute the generalized eigenvalues. The default for `algorithm` depends on the properties of `A` and `B`, but is generally `'qz'`, which uses the QZ algorithm.

If `A` is Hermitian and `B` is Hermitian positive definite, then the default for `algorithm` is `'chol'`.

`[ ___ ] = eig( ___ ,eigvalOption)` returns the eigenvalues in the form specified by `eigvalOption` using any of the input or output arguments in previous syntaxes. Specify `eigvalOption` as `'vector'` to return the eigenvalues in a column vector or as `'matrix'` to return the eigenvalues in a diagonal matrix.

Examples

Eigenvalues of Matrix

Use `gallery` to create a symmetric positive definite matrix.

```
A = gallery('lehmer',4)
```

```
A =

    1.0000    0.5000    0.3333    0.2500
```

```
    0.5000    1.0000    0.6667    0.5000
    0.3333    0.6667    1.0000    0.7500
    0.2500    0.5000    0.7500    1.0000
```

Calculate the eigenvalues of A. The result is a column vector.

```
e = eig(A)
```

```
e =

    0.2078
    0.4078
    0.8482
    2.5362
```

Alternatively, use `eigvalOption` to return the eigenvalues in a diagonal matrix.

```
D = eig(A,'matrix')
```

```
D =

    0.2078         0         0         0
         0    0.4078         0         0
         0         0    0.8482         0
         0         0         0    2.5362
```

Eigenvalues and Eigenvectors of Matrix

Use `gallery` to create a circulant matrix.

```
A = gallery('circul',3)
```

```
A =

     1     2     3
     3     1     2
     2     3     1
```

Calculate the eigenvalues and right eigenvectors of A.

```
[V,D] = eig(A)
```

```
V =
  -0.5774 + 0.0000i   0.2887 - 0.5000i   0.2887 + 0.5000i
  -0.5774 + 0.0000i  -0.5774 + 0.0000i  -0.5774 + 0.0000i
  -0.5774 + 0.0000i   0.2887 + 0.5000i   0.2887 - 0.5000i


D =
   6.0000 + 0.0000i   0.0000 + 0.0000i   0.0000 + 0.0000i
   0.0000 + 0.0000i  -1.5000 + 0.8660i   0.0000 + 0.0000i
   0.0000 + 0.0000i   0.0000 + 0.0000i  -1.5000 - 0.8660i
```

Verify that the results satisfy `A*V = V*D`.

```
A*V - V*D
```

```
ans =
   1.0e-14 *

  -0.2665 + 0.0000i  -0.0333 + 0.1110i  -0.0333 - 0.1110i
   0.0888 + 0.0000i   0.0000 + 0.1221i   0.0000 - 0.1221i
  -0.0444 + 0.0000i  -0.0111 + 0.1221i  -0.0111 - 0.1221i
```

Ideally, the eigenvalue decomposition satisfies the relationship. Since `eig` performs the decomposition using floating-point computations, then `A*V` can, at best, approach `V*D`. In other words, `A*V - V*D` is close to, but not exactly, `0`.

Eigenvalues of a Matrix Whose Elements Differ Dramatically in Scale

```
A = [ 3.0     -2.0      -0.9     2*eps;
     -2.0      4.0       1.0    -eps;
     -eps/4    eps/2    -1.0     0;
     -0.5     -0.5       0.1     1.0];
```

Calculate the eigenvalues and right eigenvectors using the default (balancing) behavior.

```
[VB,DB] = eig(A)
```

```
VB =

    0.6153   -0.4176   -0.0000   -0.1528
   -0.7881   -0.3261         0    0.1345
   -0.0000   -0.0000   -0.0000   -0.9781
```

```
    0.0189    0.8481   -1.0000    0.0443


DB =

    5.5616         0         0         0
         0    1.4384         0         0
         0         0    1.0000         0
         0         0         0   -1.0000
```

Verify that the results satisfy `A*VB = VB*DB`.

```
A*VB - VB*DB

ans =

   1.0e-14 *

   -0.1776   -0.0111   -0.0559   -0.0167
    0.3553    0.1055    0.0336   -0.0194
    0.0017    0.0002    0.0007         0
    0.0264   -0.0222    0.0222    0.0097
```

This result does not satisfy `A*VB = VB*DB`. Ideally, the eigenvalue decomposition satisfies this relationship. Since `eig` performs the decomposition using floating-point computations, then `A*V` can, at best, approach `V*D`. In other words, `A*V - V*D` is close to, but not exactly, `0`.

Now, try calculating the eigenvalues and right eigenvectors without the balancing step.

```
[VN,DN] = eig(A,'nobalance')

VN =

    0.6153   -0.4176   -0.0000   -0.1528
   -0.7881   -0.3261         0    0.1345
   -0.0000   -0.0000   -0.0000   -0.9781
    0.0189    0.8481   -1.0000    0.0443


DN =

    5.5616         0         0         0
```

```
         0    1.4384         0         0
         0         0    1.0000         0
         0         0         0   -1.0000
```

Verify that the results satisfy `A*VN = VN*DN`.

```
A*VN - VN*DN
```

```
ans =

   1.0e-14 *

   -0.1776   -0.0111   -0.0559   -0.0167
    0.3553    0.1055    0.0336   -0.0194
    0.0017    0.0002    0.0007         0
    0.0264   -0.0222    0.0222    0.0097
```

`A*VN - VN*DN` is much closer to `0`, so the `'nobalance'` option produces more accurate results in this case.

Left Eigenvectors

Create a 3-by-3 matrix.

```
 A = [1 7 3; 2 9 12; 5 22 7];
```

Calculate the right eigenvectors, `V`, the eigenvalues, `D`, and the left eigenvectors, `W`.

```
[V,D,W] = eig(A)
```

```
V =

   -0.2610   -0.9734    0.1891
   -0.5870    0.2281   -0.5816
   -0.7663   -0.0198    0.7912


D =

   25.5548         0         0
         0   -0.5789         0
         0         0   -7.9759
```

```
W =

   -0.1791   -0.9587   -0.1881
   -0.8127    0.0649   -0.7477
   -0.5545    0.2768    0.6368
```

Verify that the results satisfy `W'*A = D*W'`.

```
W'*A - D*W'
```

```
ans =

   1.0e-13 *

    0.1155   -0.0711   -0.0711
   -0.0033   -0.0215   -0.0408
    0.0022    0.0266    0.0178
```

Ideally, the eigenvalue decomposition satisfies the relationship. Since `eig` performs the decomposition using floating-point computations, then `W'*A` can, at best, approach `D*W'`. In other words, `W'*A - D*W'` is close to, but not exactly, `0`.

Eigenvalues of Nondiagonalizable (Defective) Matrix

Create a 3-by-3 matrix.

```
A = [3 1 0; 0 3 1; 0 0 3];
```

Calculate the eigenvalues and right eigenvectors of `A`.

```
[V,D] = eig(A)
```

```
V =

    1.0000   -1.0000    1.0000
         0    0.0000   -0.0000
         0         0    0.0000


D =

     3     0     0
```

```
     0     3     0
     0     0     3
```

A has repeated eigenvalues and the eigenvectors are not independent. This means that A is not diagonalizable and is, therefore, defective.

Verify that V and D satisfy the equation, A*V = V*D, even though A is defective.

```
A*V - V*D
```

```
ans =

   1.0e-15 *

         0    0.8882   -0.8882
         0         0    0.0000
         0         0         0
```

Ideally, the eigenvalue decomposition satisfies the relationship. Since eig performs the decomposition using floating-point computations, then A*V can, at best, approach V*D. In other words, A*V - V*D is close to, but not exactly, 0.

Generalized Eigenvalues

Create two matrices, A and B, then solve the generalized eigenvalue problem for the eigenvalues and right eigenvectors of the pair (A,B).

```
A = [1/sqrt(2) 0; 0 1];
B = [0 1; -1/sqrt(2) 0];
[V,D]=eig(A,B)
```

```
V =
   1.0000 + 0.0000i   1.0000 + 0.0000i
   0.0000 - 0.7071i   0.0000 + 0.7071i


D =
   0.0000 + 1.0000i   0.0000 + 0.0000i
   0.0000 + 0.0000i   0.0000 - 1.0000i
```

Verify that the results satisfy A*V = B*V*D.

```
A*V - B*V*D
```

```
ans =

     0     0
     0     0
```

The residual error `A*V - B*V*D` is exactly zero.

Generalized Eigenvalues Using QZ Algorithm for Badly Conditioned Matrices

Create a badly conditioned symmetric matrix containing values close to machine precision.

```
format long e
A = diag([10^-16, 10^-15])
```

```
A =
     1.000000000000000e-16                         0
                         0     1.000000000000000e-15
```

Calculate the generalized eigenvalues and a set of right eigenvectors using the default algorithm. In this case, the default algorithm is `'chol'`.

```
[V1,D1] = eig(A,A)
```

```
V1 =
     1.000000000000000e+08                         0
                         0     3.162277660168380e+07


D1 =
     9.999999999999999e-01                         0
                         0     1.000000000000000e+00
```

Now, calculate the generalized eigenvalues and a set of right eigenvectors using the `'qz'` algorithm.

```
[V2,D2] = eig(A,A,'qz')
```

```
V2 =
     1     0
```

```
     0     1


D2 =
     1     0
     0     1
```

Check how well the `'chol'` result satisfies `A*V1 = A*V1*D1`.

```
format short
A*V1 - A*V1*D1
```

```
ans =

   1.0e-23 *

    0.1654         0
         0   -0.6617
```

Now, check how well the `'qz'` result satisfies `A*V2 = A*V2*D2`.

```
A*V2 - A*V2*D2
```

```
ans =

     0     0
     0     0
```

When both matrices are symmetric, `eig` uses the `'chol'` algorithm by default. In this case, the QZ algorithm returns more accurate results.

Generalized Eigenvalues Where One Matrix is Singular

Create a 2-by-2 identity matrix, `A`, and a singular matrix, `B`.

```
A = eye(2);
B = [3 6; 4 8];
```

Try to calculate the generalized eigenvalues of the matrix, $B^{-1}A$.

```
[V,D] = eig(B\A)
```

```
Warning: Matrix is singular to working precision.

Error using eig

Input to EIG must not contain NaN or Inf.
```

Now calculate the generalized eigenvalues and right eigenvectors by passing both matrices to the `eig` function.

```
[V,D] = eig(A,B)
```

```
V =

   -0.7500   -1.0000
   -1.0000    0.5000


D =

    0.0909         0
         0       Inf
```

It is better to pass both matrices separately, and let `eig` choose the best algorithm to solve the problem. In this case, `eig(A,B)` returned a set of eigenvectors and at least one real eigenvalue, even though `B` is not invertible.

Verify $Av = \lambda Bv$ for the first eigenvalue and the first eigenvector.

```
eigval = D(1,1);
eigvec = V(:,1);
A*eigvec - eigval*B*eigvec
```

```
ans =

   1.0e-15 *

    0.1110
    0.2220
```

Ideally, the eigenvalue decomposition satisfies the relationship. Since the decomposition is performed using floating-point computations, then `A*eigvec` can, at best, approach `eigval*B*eigvec`, as it does in this case.

Input Arguments

A — Input matrix

square matrix

Input matrix, specified as a real or complex square matrix.

Data Types: `double` | `single`
Complex Number Support: Yes

B — Generalized eigenvalue problem input matrix

square matrix

Generalized eigenvalue problem input matrix, specified as a square matrix of real or complex values. B must be the same size as A.

Data Types: `double` | `single`
Complex Number Support: Yes

`balanceOption` — Balance option

`'balance'` (default) | `'nobalance'`

Balance option, specified as: `'balance'`, which enables a preliminary balancing step, or `'nobalance'` which disables it. In most cases, the balancing step improves the conditioning of A to produce more accurate results. However, there are cases in which balancing produces incorrect results. Specify `'nobalance'` when A contains values whose scale differs dramatically. For example, if A contains nonzero integers, as well as very small (near zero) values, then the balancing step might scale the small values to make them as significant as the integers and produce inaccurate results.

`'balance'` is the default behavior. For more information about balancing, see `balance`.

Data Types: `char`

`algorithm` — Generalized eigenvalue algorithm

`'chol'` | `'qz'`

Generalized eigenvalue algorithm, specified as `'chol'` or `'qz'`, which selects the algorithm to use for calculating the generalized eigenvalues of a pair.

algorithm	Description
`'chol'`	Computes the generalized eigenvalues of A and B using the Cholesky factorization of B.

algorithm	Description
`'qz'`	Uses the QZ algorithm, also known as the generalized Schur decomposition. This algorithm ignores the symmetry of `A` and `B`.

In general, the two algorithms return the same result. The QZ algorithm can be more stable for certain problems, such as those involving badly conditioned matrices.

When you omit the `algorithm` argument, the `eig` function selects an algorithm based on the properties of `A` and `B`. It uses the `'chol'` algorithm for symmetric (Hermitian) `A` and symmetric (Hermitian) positive definite `B`. Otherwise, it uses the `'qz'` algorithm.

Regardless of the algorithm you specify, the `eig` function always uses the QZ algorithm when `A` or `B` are not symmetric.

`eigvalOption` — Eigenvalue option

`'vector'` | `'matrix'`

Eigenvalue option, specified as `'vector'` or `'matrix'`. This option allows you to specify whether the eigenvalues are returned in a column vector or a diagonal matrix. The default behavior varies according to the number of outputs specified:

- If you specify one output, such as `e = eig(A)`, then the eigenvalues are returned as a column vector by default.
- If you specify two or three outputs, such as `[V,D] = eig(A)`, then the eigenvalues are returned as a diagonal matrix, `D`, by default.

Example: `D = eig(A,'matrix')` returns a diagonal matrix of eigenvalues with the one output syntax.

Data Types: `char`

Output Arguments

`e` — Eigenvalues (returned as vector)

column vector

Eigenvalues, returned as a column vector containing the eigenvalues (or generalized eigenvalues of a pair) with multiplicity.

- When A is real and symmetric or complex Hermitian, the values of e that satisfy $Av = \lambda v$ are real.
- When A is real and skew-symmetric or skew-Hermitian, the values of e that satisfy $Av = \lambda v$ are purely imaginary or zero.

V — Right eigenvectors
square matrix

Right eigenvectors, returned as a square matrix whose columns are the right eigenvectors of A or generalized right eigenvectors of the pair, (A,B). The form and normalization of V depends on the combination of input arguments:

- [V,D] = eig(A) returns matrix V, whose columns are the right eigenvectors of A such that A*V = V*D. The eigenvectors in V are normalized so that the 2-norm of each is 1.

  If A is real symmetric, then the right eigenvectors, V, are orthonormal.
- [V,D] = eig(A,'nobalance') also returns matrix V. However, the 2-norm of each eigenvector is not necessarily 1.
- [V,D] = eig(A,B) and [V,D] = eig(A,B,algorithm) returns V as a matrix whose columns are the generalized right eigenvectors that satisfy A*V = B*V*D. The 2-norm of each eigenvector is not necessarily 1. In this case, D contains the generalized eigenvalues of the pair, (A,B), along the main diagonal.

  If A is symmetric and B is symmetric positive definite, then the eigenvectors in V are normalized so that the B-norm of each is 1.

D — Eigenvalues (returned as matrix)
diagonal matrix

Eigenvalues, returned as a diagonal matrix with the eigenvalues of A on the main diagonal or the eigenvalues of the pair, (A,B), with multiplicity, on the main diagonal.

- When A is real and symmetric or complex Hermitian, the values of D that satisfy $Av = \lambda v$ are real.
- When A is real and skew-symmetric or skew-Hermitian, the values of D that satisfy $Av = \lambda v$ are purely imaginary or zero.

W — Left eigenvectors
square matrix

Left eigenvectors, returned as a square matrix whose columns are the left eigenvectors of `A` or generalized left eigenvectors of the pair, `(A,B)`. The form and normalization of `W` depends on the combination of input arguments:

- `[V,D,W] = eig(A)` returns matrix `W`, whose columns are the left eigenvectors of `A` such that `W'*A = D*W'`. The eigenvectors in `W` are normalized so that the 2-norm of each is 1. If `A` is symmetric, then `W` is the same as `V`.
- `[V,D,W] = eig(A,'nobalance')` also returns matrix `W`. However, the 2-norm of each eigenvector is not necessarily 1.
- `[V,D,W] = eig(A,B)` and `[V,D,W] = eig(A,B,algorithm)` returns `W` as a matrix whose columns are the generalized left eigenvectors that satisfy `W'*A = D*W'*B`. The 2-norm of each eigenvector is not necessarily 1. In this case, `D` contains the generalized eigenvalues of the pair, `(A,B)`, along the main diagonal.

  If `A` and `B` are symmetric, then `W` is the same as `V`.

Tips

- The `eig` function can calculate the eigenvalues of sparse matrices that are real and symmetric. To calculate the eigenvectors of a sparse matrix, or to calculate the eigenvalues of a sparse matrix that is not real and symmetric, use the `eigs` function.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- `V` might represent a different basis of eigenvectors, and the eigenvalues in `D` might not be in the same order as in MATLAB.
  - For the generalized eigenvalue problem, `[V,D] = eig(A,B)`, code generation always uses the `'qz'` option.
  - For the standard eigenvalue problem, `[V,D] = eig(A)`, when `A` is Hermitian, code generation uses `schur` to calculate `V` and `D`. Otherwise, the results

of `[V,D] = eig(A)` are similar to those obtained by using `[V,D] = eig(A,eye(size(A)),'qz')` in MATLAB, except that the columns of `V` are normalized.

- The `'balance'` and `'nobalance'` options are not supported for the standard eigenvalue problem.
- The `'chol'` option is not supported for the symmetric generalized eigenvalue problem.
- Outputs are complex.
- The option to calculate left eigenvectors is not supported.

See Also

See Also

`balance` | `condeig` | `eigs` | `hess` | `qz` | `schur`

Introduced before R2006a

eigs

Subset of eigenvalues and eigenvectors

Syntax

```
d = eigs(A)
d = eigs(A,k)
d = eigs(A,k,sigma)
d = eigs(A,k,sigma,opts)

d = eigs(A,B, ___ )

d = eigs(Afun,n, ___ )

[V,D] = eigs( ___ )
[V,D,flag] = eigs( ___ )
```

Description

`d = eigs(A)` returns a vector of the six largest magnitude eigenvalues of matrix `A`.

`d = eigs(A,k)` returns the `k` largest magnitude eigenvalues.

`d = eigs(A,k,sigma)` returns `k` eigenvalues based on the value of `sigma`. For example, `eigs(A,k,'sm')` returns the `k` smallest magnitude eigenvalues.

`d = eigs(A,k,sigma,opts)` additionally specifies options using a structure.

`d = eigs(A,B, ___ )` solves the generalized eigenvalue problem `A*V = B*V*D`. You can optionally specify `k`, `sigma`, or `opts` as additional input arguments.

`d = eigs(Afun,n, ___ )` specifies a function handle, `Afun`, instead of a matrix, `A`. You can optionally specify `B`, `k`, `sigma`, or `opts` as additional input arguments.

`[V,D] = eigs( ___ )` returns diagonal matrix `D` containing the eigenvalues on the main diagonal, and matrix `V` whose columns are the corresponding eigenvectors. You can use any of the input argument combinations in previous syntaxes.

`[V,D,flag] = eigs( ___ )` also returns a convergence flag. If `flag` is `0`, then all the eigenvalues converged.

Examples

Largest Eigenvalues of Sparse Matrix

Compute the six largest magnitude eigenvalues of a sparse matrix.

```
A = delsq(numgrid('C',15));
d = eigs(A)
```

```
d =

    7.8666
    7.7324
    7.6531
    7.5213
    7.4480
    7.3517
```

Specify a second input to compute a specific number of the largest eigenvalues.

```
d = eigs(A,3)
```

```
d =

    7.8666
    7.7324
    7.6531
```

Smallest Eigenvalues of Sparse Matrix

Compute the five smallest eigenvalues of a sparse matrix.

```
A = delsq(numgrid('C',15));
d = eigs(A,5,'sm')
```

```
d =
```

```
    0.5520
    0.4787
    0.3469
    0.2676
    0.1334
```

Eigenvalues Using Function Handle

Create a 1500-by-1500 random sparse matrix with a 25% approximate density of nonzero elements.

```
n = 1500;
A = sprand(n,n,0.25);
```

Find the LU factorization of the matrix, returning a permutation vector `p` that satisfies `A(p,:) = L*U`.

```
[L,U,p] = lu(A,'vector');
```

Create a function handle `Afun` that accepts a vector input `x` and uses the results of the LU decomposition to, in effect, return `A\x`.

```
Afun = @(x) U\(L\(x(p)));
```

Calculate the six smallest magnitude eigenvalues using `eigs` with the function handle `Afun`. The second input is the size of `A`.

```
d = eigs(Afun,1500,6,'sm')
```

```
d =
   0.1423 + 0.0000i
   0.4859 + 0.0000i
  -0.3323 - 0.3881i
  -0.3323 + 0.3881i
   0.1019 + 0.5381i
   0.1019 - 0.5381i
```

Types of Eigenvalues

`west0479` is a real-valued 479-by-479 sparse matrix with both real and complex pairs of conjugate eigenvalues.

Load the `west0479` matrix, then compute and plot all of the eigenvalues using `eig`. Since the eigenvalues are complex, `plot` automatically uses the real parts as the x-coordinates and the imaginary parts as the y-coordinates.

```
load west0479
A = west0479;
d = eig(full(A));
plot(d,'+')
```

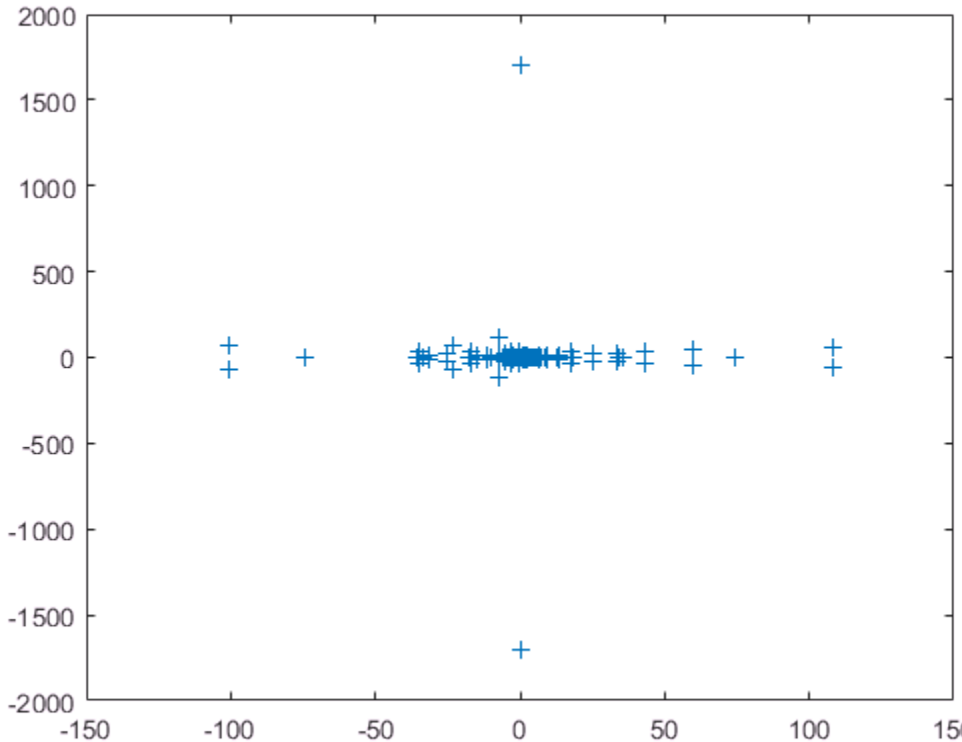

The eigenvalues are clustered along the real line (x-axis), particularly near the origin.

`eigs` has several options for `sigma` that can pick out the largest or smallest eigenvalues of varying types.

Compute and plot three eigenvalues for each of the available options for `sigma`. (Since `A` is not symmetric, the `'la'`, `'sa'`, and `'be'` options are not available.)

```
figure
hold on
sm = eigs(A,3,'sm');
plot(sm,'r*')

lm = eigs(A,3,'lm');
plot(lm,'b*')

sr = eigs(A,3,'sr');
plot(sr,'mo')

lr = eigs(A,3,'lr');
plot(lr,'co')

opts.p = 45;
li = eigs(A,3,'li',opts);
plot(li,'g^')

si = eigs(A,3,'si',opts);
plot(si,'k^')

legend('Smallest magnitude SM','Largest magnitude LM','Smallest real SR',...
    'Largest real LR','Largest imaginary LI','Smallest imaginary SI')

xlabel('Real axis')
ylabel('Imaginary axis')
title('Six types of eigenvalues')
```

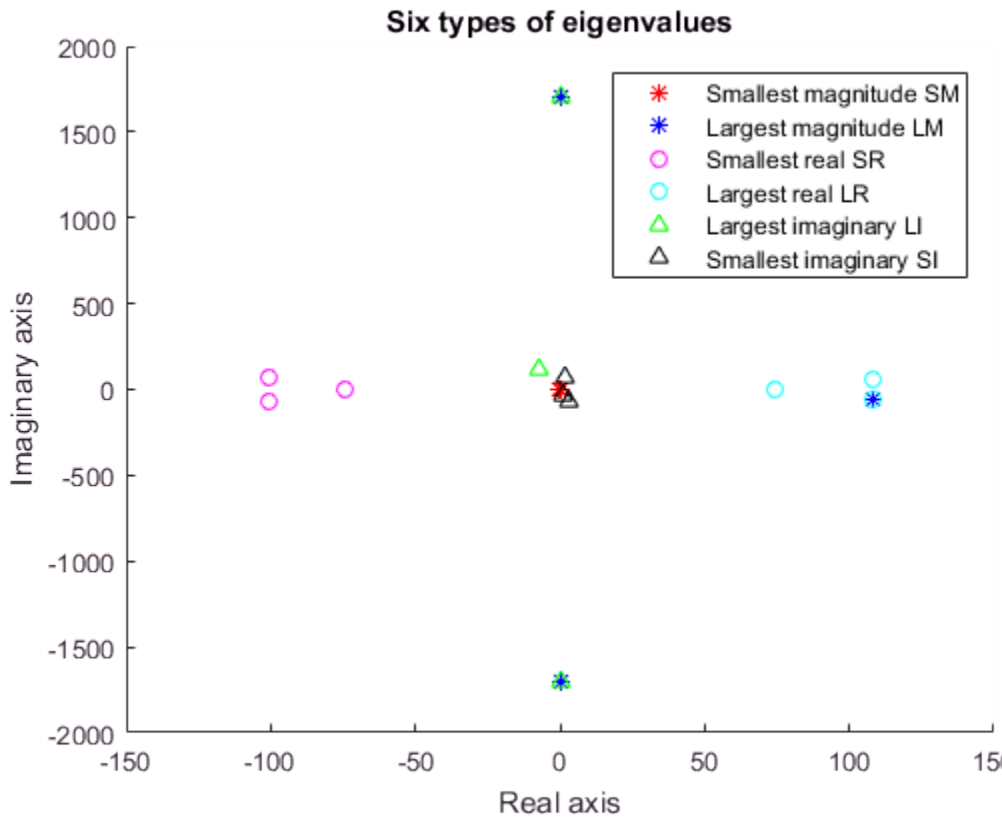

Difference Between `'sa'` and `'sm'` Eigenvalues

Create a symmetric positive definite sparse matrix.

```
A = delsq(numgrid('C', 150));
```

Compute the six smallest algebraic eigenvalues using `'sa'`, which employs a Krylov method using A.

```
tic
d = eigs(A, 6, 'sa')
```

```
d =
```

```
    0.0013
    0.0025
    0.0033
    0.0045
    0.0052
    0.0063
```

```
toc
```

```
Elapsed time is 3.094120 seconds.
```

Compute the same eigenvalues using `'sm'`, which employs a Krylov method using the inverse of A.

```
tic
dsm = eigs(A, 6, 'sm')
```

```
dsm =

    0.0063
    0.0052
    0.0045
    0.0033
    0.0025
    0.0013
```

```
toc
```

```
Elapsed time is 0.507705 seconds.
```

The eigenvalues are clustered near zero. The `'sa'` computation struggles to converge using A since the gap between the eigenvalues is so small. Conversely, the `'sm'` option uses the inverse of A, and therefore the inverse of the eigenvalues of A, which have a much larger gap and are therefore easier to compute.

Eigenvalues of Nearly Symmetric Matrix

Create a 1000-by-1000 matrix that is nearly symmetric.

```
rng(3)
```

```
U = orth(randn(1000));
d = randn(500,1);
A = U*diag([d; d])*U';
```

Preview the top-left corner of the matrix.

```
A(1:6,1:6)
```

```
ans =

   -0.0146   -0.0403   -0.0302   -0.0083   -0.0097   -0.0283
   -0.0403    0.0943    0.0733    0.0231    0.0249   -0.0051
   -0.0302    0.0733    0.0078    0.0417    0.0554   -0.0987
   -0.0083    0.0231    0.0417    0.1296   -0.0622    0.0298
   -0.0097    0.0249    0.0554   -0.0622    0.0300   -0.0316
   -0.0283   -0.0051   -0.0987    0.0298   -0.0316    0.0410
```

Calculate the six smallest magnitude eigenvalues of A.

```
e = eigs(A,6,'sm')
```

```
e =
   0.0031 + 0.0000i
   0.0031 + 0.0000i
   0.0076 - 0.0000i
   0.0076 + 0.0000i
   0.0099 + 0.0000i
   0.0099 + 0.0000i
```

`eigs` detects when a matrix is symmetric and uses a specific algorithm for that case. Since A is nearly symmetric, `eigs` does not use the symmetric algorithm and the eigenvalues contain small imaginary parts.

Use `A = (A+A')/2` to make the matrix symmetric and recalculate the six smallest magnitude eigenvalues.

```
A = (A+A')/2;
e = eigs(A,6,'sm')
```

```
e =

    0.0099
```

```
    0.0099
    0.0076
    0.0076
    0.0031
    0.0031
```

Repeated Eigenvalues of Symmetric Positive Definite Sparse Matrix

`A = delsq(numgrid('C',30))` is a symmetric positive definite matrix of size 632 with eigenvalues reasonably well-distributed in the interval (0 8), but with 18 eigenvalues repeated at 4.

Use the `eig` function to compute all 632 eigenvalues and the `eigs` function to compute the six largest and smallest magnitude eigenvalues.

```
A = delsq(numgrid('C',30));
d = sort(eig(full(A)));
dlm = eigs(A);
dsm = eigs(A,6,'sa');
```

Plot the results from `eig` and `eigs` for the six largest and smallest magnitude eigenvalues.

```
subplot(2,1,1)
plot(dlm,'k+')
hold on
plot(d(end:-1:end-5),'ks')
hold off
legend('eigs(A)','eig(full(A))')
xlim([0.5 6.5])

subplot(2,1,2)
plot(dsm,'k+')
hold on
plot(d(1:6),'ks')
hold off
legend('eigs(A,6,''sa'')','eig(full(A))','Location','SouthEast')
xlim([0.5 6.5])
```

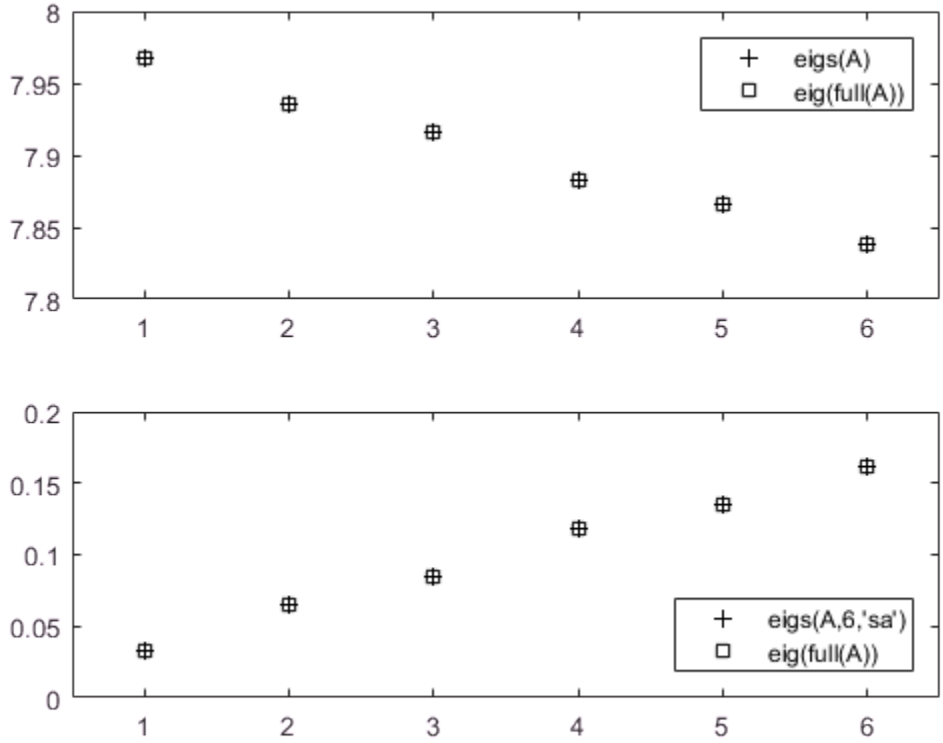

The repeated eigenvalue at 4 must be handled more carefully. The call `eigs(A,20,4.0)` to compute 20 eigenvalues near 4.0 tries to find eigenvalues of `A - 4.0*I`. This involves divisions of the form `1/(lambda - 4.0)`, where `lambda` is an estimate of an eigenvalue of `A`. As `lambda` gets closer to 4.0, `eigs` fails. You must use a value of `sigma` that is near but not equal to 4 to find those eigenvalues.

```
sigma = 4 - 1e-6;
D = sort(eigs(A,20,sigma));
```

Compute the 20 eigenvalues closest to 4 using `eig`, and the 20 eigenvalues closest to 4 - 1e-6 using `eigs`.

```
figure(2)
plot(d(307:326),'ks')
```

```
hold on
plot(D,'k+')
hold off
legend('eig(A)','eigs(A,20,sigma)')
title('18 Repeated Eigenvalues of A')
```

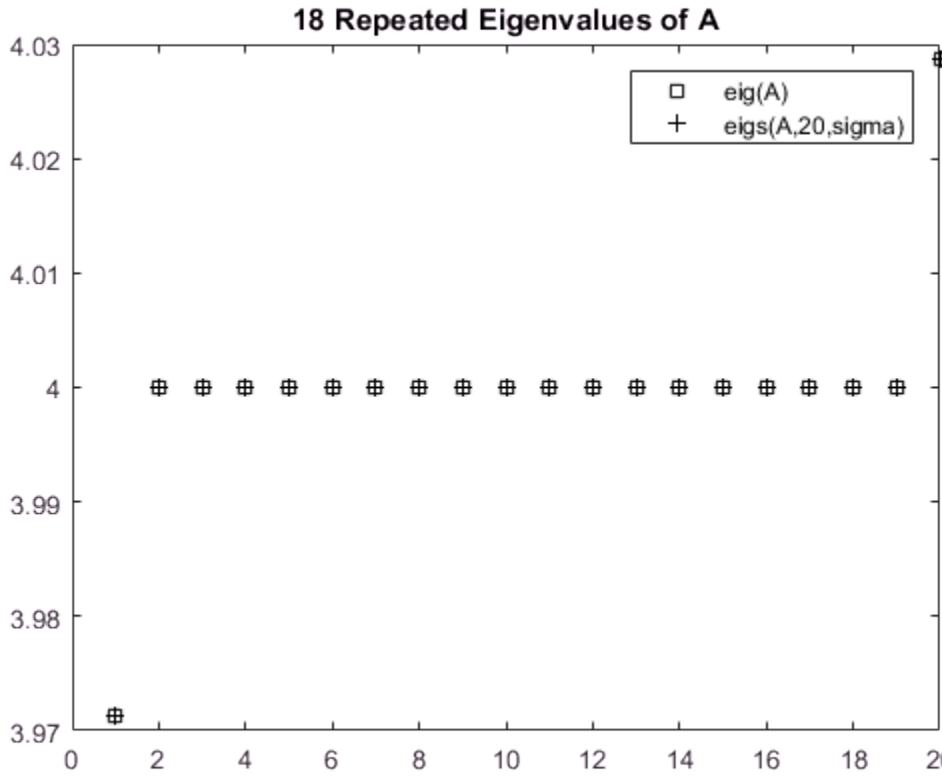

Eigenvalues of Permuted Cholesky Factor

Create sparse random matrices A and B that both have low densities of nonzero elements.

```
B = sprandn(1e3,1e3,0.001) + speye(1e3);
B = B'*B;
A = sprandn(1e3,1e3,0.005);
A = A+A';
```

Find the Cholesky decomposition of matrix B, using three outputs to return the permutation vector s and test value p.

```
[R,p,s] = chol(B,'vector');
p
```

```
p = 0
```

Since p is zero, B is a symmetric positive definite matrix that satisfies B(s,s) = R'*R.

Calculate the six largest magnitude eigenvalues and eigenvectors of the generalized eigenvalue problem involving A and R. Since R is the Cholesky factor of B, specify opts.cholB = true. Furthermore, since B(s,s) = R'*R and thus R = chol(B(s,s)), use the permutation vector s to specify opts.permB = s.

```
opts.cholB = true;
opts.permB = s;
[V,D,flag] = eigs(A,R,6,'lm',opts);
flag
```

```
flag = 0
```

Since flag is zero, all of the eigenvalues converged.

Input Arguments

A — Input matrix

matrix

Input matrix, specified as a square matrix. A is typically, but not always, a large and sparse matrix.

If A is symmetric, then eigs uses a specialized algorithm for that case. If A is *nearly* symmetric, then consider using A = (A+A')/2 to make A symmetric before calling eigs.

Data Types: double
Complex Number Support: Yes

B — Input matrix

matrix

Input matrix, specified as a square matrix of the same size as A. When B is specified, eigs solves the generalized eigenvalue problem A*V = B*V*D. If necessary, eigs(A, [],sigma,...) indicates the standard eigenvalue problem A*V = V*D.

If B is symmetric, then eigs uses a specialized algorithm for that case. If B is *nearly* symmetric, then consider using B = (B+B')/2 to make B symmetric before calling eigs.

Data Types: double
Complex Number Support: Yes

k — Number of eigenvalues to compute

scalar

Number of eigenvalues to compute, specified as a positive scalar integer.

Example: eigs(A,2) returns the two largest eigenvalues of A.

sigma — Type of eigenvalues

'lm' (default) | 'sm' | 'la' | 'sa' | 'be' | 'lr' | 'sr' | 'li' | 'si' | scalar

Type of eigenvalues, specified as one of these values:

sigma	Requirements	Description
scalar (real or complex, including 0)	—	The eigenvalues closest to the number sigma.
'lm' (default)		Largest magnitude.
'sm'		Smallest magnitude. Same as sigma = 0.
'la'	Works with problems that have real symmetric A and, if specified, symmetric positive-definite B.	Largest algebraic
'sa'		Smallest algebraic
'be'		Both ends (one more from high end if k is odd)
'lr'	Works with nonsymmetric and complex problems.	Largest real part
'sr'		Smallest real part
'li'		Largest imaginary part
'si'		Smallest imaginary part

Example: `eigs(A,k,1)` returns the `k` eigenvalues closest to 1.

Example: `eigs(A,k,'sm')` returns the `k` smallest magnitude eigenvalues.

`opts` — Options structure

structure

Options structure, specified as a structure containing one or more of the fields in this table. Unset fields have a default value indicated by `{}` in the last column.

Option Field	Description	Values
`opts.issym`	Set to `1` if matrix `A` is symmetric. If using `Afun`, this option specifies whether `A-sigma*I` or `A-sigma*B` is symmetric.	`[{0} | 1]`
`opts.isreal`	Set to `1` if `A` is real. If using `Afun`, this option specifies whether `A-sigma*I` or `A-sigma*B` is real.	`[0 | {1}]`
`opts.tol`	Specifies the convergence tolerance, which is compared to the Ritz estimate residual: `RitzRes <= tol*norm(A)`	`[scalar | {eps}]`
`opts.maxit`	Maximum number of iterations.	`[integer | {300}]`
`opts.p`	Number of Lanczos basis vectors. The recommended value is `p >= 2*k`, or for real nonsymmetric problems, `p >= 2*k+1`. If you do not specify a `p` value, then the default algorithm uses at least `20` Lanczos vectors.	`[integer | {2*k}]`

Option Field	Description	Values
	p must satisfy k < p <= n for real symmetric problems, and k+1 < p <= n otherwise. **Note:** If eigs returns a warning message about not converging, then increasing the value of p can help. However, increasing p too much can cause memory issues.	
opts.v0	Starting vector.	[n-by-1 vector | {vector randomly generated by rand}]
opts.disp	Diagnostic information display level. 0 is off, 1 is some, 2 is all.	[{0} | 1 | 2]
opts.cholB	Set to 1 if B is actually the Cholesky factor chol(B). Do not use this option if sigma is 'sm' or a numeric scalar.	[{0} | 1]
opts.permB	Specify the permutation vector permB if sparse B is really chol(B(permB,permB)). Do not use this option if sigma is 'sm' or a numeric scalar.	[permB | {1:n}]

Example: opts.issym = 1, opts.tol = 1e-10 creates a structure with values set for the fields issym and tol.

Data Types: struct

`Afun` — Matrix function

function handle

Matrix function, specified as a function handle. The function `Y = Afun(x)` must return the proper value depending on the `sigma` input:

- `A*x` — If `sigma` is unspecified or anything other than `'sm'`.
- `A\x` — If `sigma` is `0` or `'sm'`.
- `(A-sigma*I)\x` — If `sigma` is a nonzero scalar (for standard eigenvalue problem).
- `(A-sigma*B)\x` — If `sigma` is a nonzero scalar (for generalized eigenvalue problem).

For example, the following `Afun` works when calling `eigs` with `sigma = 'sm'`:

```
[L,U,p] = lu(A,'vector');
Afun = @(x) U\(L\(x(p)));
d = eigs(Afun,100,6,'sm')
```

For a generalized eigenvalue problem, add matrix `B` as follows (`B` cannot be represented by a function handle):

```
d = eigs(Afun,100,B,6,'sm')
```

`A` is assumed to be real and nonsymmetric unless `opts.isreal` or `opts.issym` specify otherwise. For information on how to provide additional parameters to the `Afun` function, see “Parameterizing Functions”.

Data Types: `function_handle`

`n` — Size of square matrix used by `Afun`

scalar

Size of square matrix `A` that is used by `Afun`, specified as a positive scalar integer.

Example: `eigs(Afun,100000)`

Output Arguments

`d` — Eigenvalues

column vector

Eigenvalues, returned as a column vector.

V — Eigenvectors
matrix

Eigenvectors, returned as a matrix. The columns in V correspond to the eigenvalues along the diagonal of D.

D — Eigenvalue matrix
matrix

Eigenvalue matrix, returned as a diagonal matrix with the eigenvalues on the main diagonal.

flag — Convergence flag
scalar

Convergence flag, returned as a scalar. A value of 0 indicates that all the eigenvalues converged. Otherwise, not all of the eigenvalues converged.

Tips

- Unless you provide a start vector with opts.v0, the default start vector is generated by rand, possibly leading to different iterations each run and perhaps even different convergence behavior. To control this, specify your start vector via opts.v0. Alternatively, you can set the random number generator state using rng before calling eigs so that rand produces the same random numbers across runs.
- Using eigs is not the most efficient way to find a few eigenvalues of small, dense matrices. If the problem fits into memory, it might be quicker to use eig(full(A)). For example, finding three eigenvalues in a 500-by-500 matrix is a relatively small problem that is easily handled with eig.
- eigs does not always return sorted eigenvalues and eigenvectors. Use sort to explicitly sort the output eigenvalues and eigenvectors in cases where their order is important.
- If eigs fails to converge for a given matrix, increase the number of Lanczos basis vectors by increasing the value of opts.p. As secondary options, adjusting the maximum number of iterations, opts.maxit, and the convergence tolerance, opts.tol, can also help with convergence behavior.

References

[1] Lehoucq, R.B. and D.C. Sorensen, "Deflation Techniques for an Implicitly Re-Started Arnoldi Iteration." *SIAM J. Matrix Analysis and Applications*. Vol. 17, 1996, pp. 789–821.

[2] Sorensen, D.C., "Implicit Application of Polynomial Filters in a k-Step Arnoldi Method." *SIAM J. Matrix Analysis and Applications*. Vol. 13, 1992, pp. 357–385.

See Also

See Also

`eig` | `svds`

Topics

"Create Function Handle"

Introduced before R2006a

ellipj

Jacobi elliptic functions

Syntax

```
[SN,CN,DN] = ellipj(U,M)
[SN,CN,DN] = ellipj(U,M,tol)
```

Description

`[SN,CN,DN] = ellipj(U,M)` returns the Jacobi elliptic functions `SN`, `CN`, and `DN` evaluated for corresponding elements of argument `U` and parameter `M`. Inputs `U` and `M` must be the same size, or either `U` or `M` must be scalar.

`[SN,CN,DN] = ellipj(U,M,tol)` computes the Jacobi elliptic functions to accuracy `tol`. The default value of `tol` is `eps`. Increase `tol` for a less accurate but more quickly computed answer.

Examples

Find the Jacobi Elliptic Functions

Find the Jacobi elliptic functions for `U = 0.5` and `M = 0.25`.

```
[s,c,d] = ellipj(0.5,0.25)
```

```
s = 0.4751

c = 0.8799

d = 0.9714
```

Plot the Jacobi Elliptic Functions

Plot the Jacobi elliptic functions for `-5≤U≤5` and `M = 0.7`.

```
M = 0.7;
```

```
U = -5:0.01:5;
[S,C,D] = ellipj(U,M);
plot(U,S,U,C,U,D);
legend('SN','CN','DN','Location','best')
grid on
title('Jacobi Elliptic Functions sn,cn,dn')
```

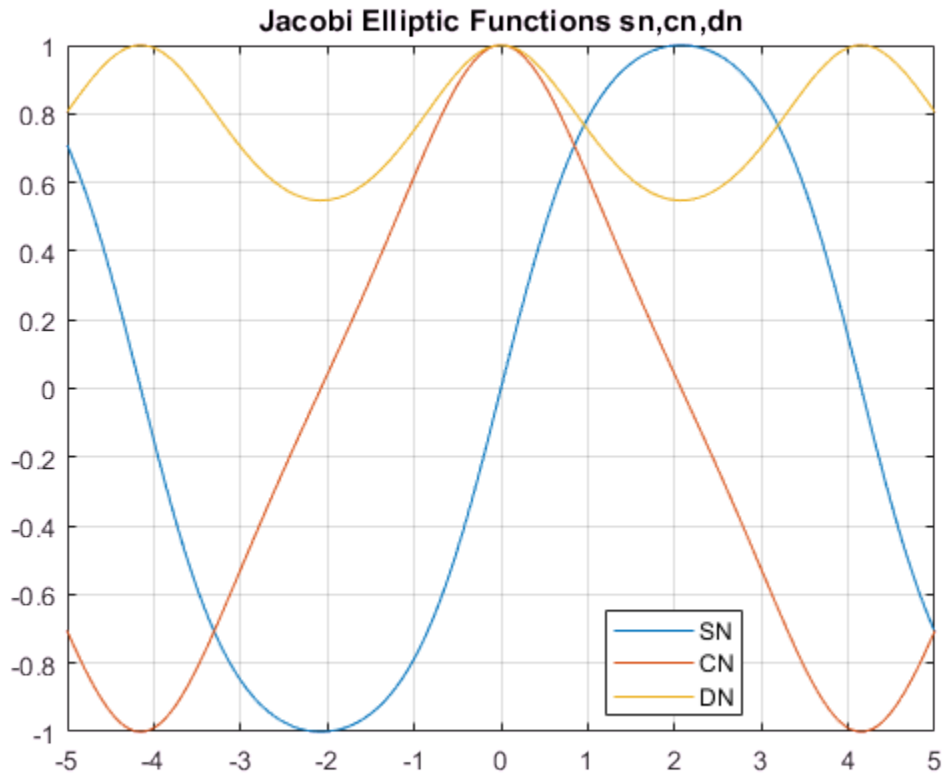

Generate a Surface Plot of the Jacobi Elliptic sn Function

Generate a surface plot of the Jacobi elliptic sn function for the allowed range of `M` and `-5≤U≤5`.

```
[M,U] = meshgrid(0:0.1:1,-5:0.1:5);
```

```
S = ellipj(U,M);
surf(U,M,S)
xlabel('U')
ylabel('M')
zlabel('sn')
title('Surface Plot of Jacobi Elliptic Function sn')
```

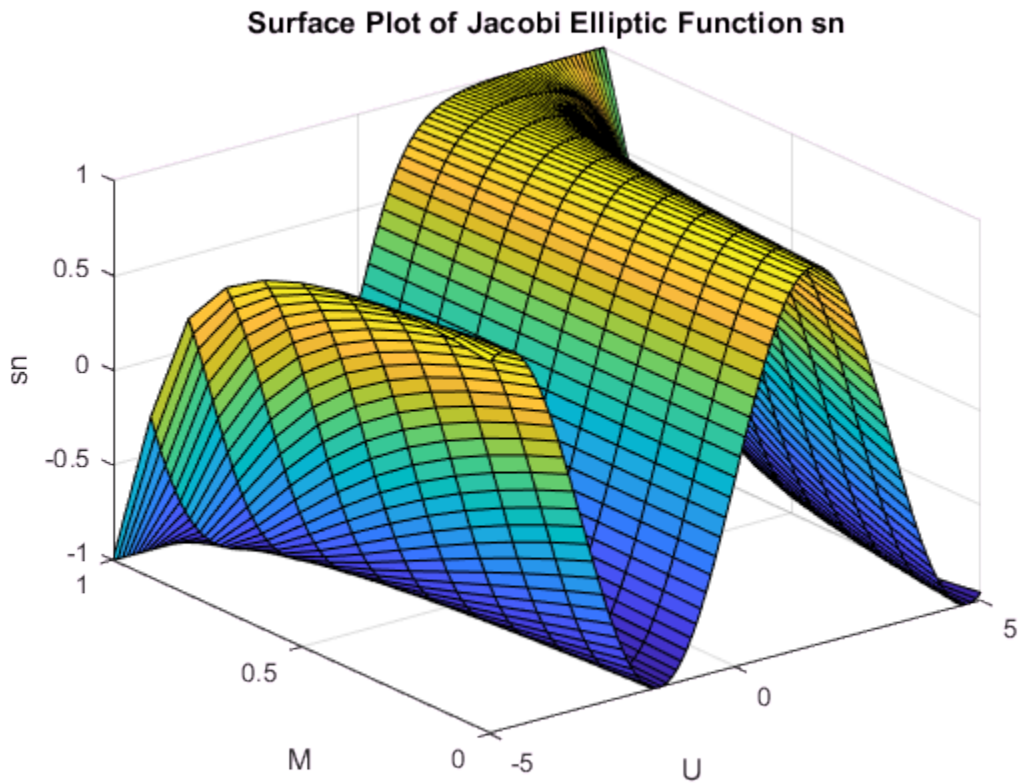

Faster Calculations of Jacobi Elliptic Integrals by Changing Tolerance

The default value of `tol` is `eps`. Find the run time with the default value for arbitrary `M` using `tic` and `toc`. Increase `tol` by a factor of 1000 and find the run time. Compare the run times.

```
tic
ellipj(0.253,0.937)
```

```
ans = 0.2479
```

```
toc
```

```
Elapsed time is 0.063586 seconds.
```

```
tic
ellipj(0.253,0.937,eps*1000)
```

```
ans = 0.2479
```

```
toc
```

```
Elapsed time is 0.061634 seconds.
```

`ellipj` runs significantly faster when tolerance is significantly increased.

Input Arguments

U — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. U is limited to real values. If U is nonscalar, M must be a scalar or a nonscalar of the same size as U.

Data Types: `single` | `double`

M — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. M can take values $0 \leq m \leq 1$. If M is a nonscalar, U must be a scalar or a nonscalar of the same size as M. Map other values of M into this range using the transformations described in [1], equations 16.10 and 16.11.

Data Types: `single` | `double`

tol — Accuracy of result

`eps` (default) | nonnegative real number

Accuracy of result, specified as a nonnegative real number. The default value is `eps`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`SN` — Jacobi elliptic function sn

scalar | vector | matrix | multidimensional array

Jacobi elliptic function sn, returned as a scalar, vector, matrix, or multidimensional array.

`CN` — Jacobi elliptic function cn

scalar | vector | matrix | multidimensional array

Jacobi elliptic function cn, returned as a scalar, vector, matrix, or multidimensional array.

`DN` — Jacobi elliptic function dn

scalar | vector | matrix | multidimensional array

Jacobi elliptic function dn, returned as a scalar, vector, matrix, or multidimensional array.

Definitions

Jacobi Elliptic Functions

The Jacobi elliptic functions are defined in terms of the integral

$$u = \int_0^{\phi} \frac{d\theta}{\sqrt{1 - m\sin^2\theta}}.$$

Then

$$sn(u) = \sin\phi,\ cn(u) = \cos\phi,\ dn(u) = \sqrt{1 - m\sin^2\phi}.$$

Some definitions of the elliptic functions use the elliptical modulus k or modular angle a instead of the parameter m. They are related by

$$k^2 = m = \sin^2 a.$$

The Jacobi elliptic functions obey many mathematical identities. For a good sample, see [1].

Algorithms

`ellipj` computes the Jacobi elliptic functions using the method of the arithmetic-geometric mean of [1]. It starts with the triplet of numbers

$$a_0 = 1,\ b_0 = \sqrt{1-m},\ c_0 = \sqrt{m}.$$

`ellipj` computes successive iterations using

$$a_i = \frac{1}{2}(a_{i-1} + b_{i-1})$$
$$b_i = (a_{i-1} b_{i-1})^{\frac{1}{2}}$$
$$c_i = \frac{1}{2}(a_{i-1} - b_{i-1}).$$

Next, it calculates the amplitudes in radians using

$$\sin(2\phi_{n-1} - \phi_n) = \frac{c_n}{a_n}\sin(\phi_n),$$

being careful to unwrap the phases correctly. The Jacobian elliptic functions are then simply

$$sn(u) = \sin\phi_0$$
$$cn(u) = \cos\phi_0$$
$$dn(u) = \sqrt{1 - m \cdot sn(u)^2}.$$

References

[1] Abramowitz, M. and I. A. Stegun, *Handbook of Mathematical Functions*, Dover Publications, 1965, 17.6.

See Also

See Also

`ellipke`

Introduced before R2006a

ellipke

Complete elliptic integrals of first and second kind

Syntax

```
K = ellipke(M)
[K,E] = ellipke(M)
[K,E] = ellipke(M,tol)
```

Description

`K = ellipke(M)` returns the complete elliptic integral of the first kind for each element in `M`.

`[K,E] = ellipke(M)` returns the complete elliptic integral of the first and second kind.

`[K,E] = ellipke(M,tol)` computes the complete elliptic integral to accuracy `tol`. The default value of `tol` is `eps`. Increase `tol` for a less accurate but more quickly computed answer.

Examples

Find Complete Elliptic Integrals of First and Second Kind

Find the complete elliptic integrals of the first and second kind for `M = 0.5`.

```
M = 0.5;
[K,E] = ellipke(M)
```

```
K = 1.8541

E = 1.3506
```

Plot Complete Elliptic Integrals of First and Second Kind

Plot the complete elliptic integrals of the first and second kind for the allowed range of `M`.

```
M = 0:0.01:1;
[K,E] = ellipke(M);
plot(M,K,M,E)
grid on
xlabel('M')
title('Complete Elliptic Integrals of First and Second Kind')
legend('First kind','Second kind')
```

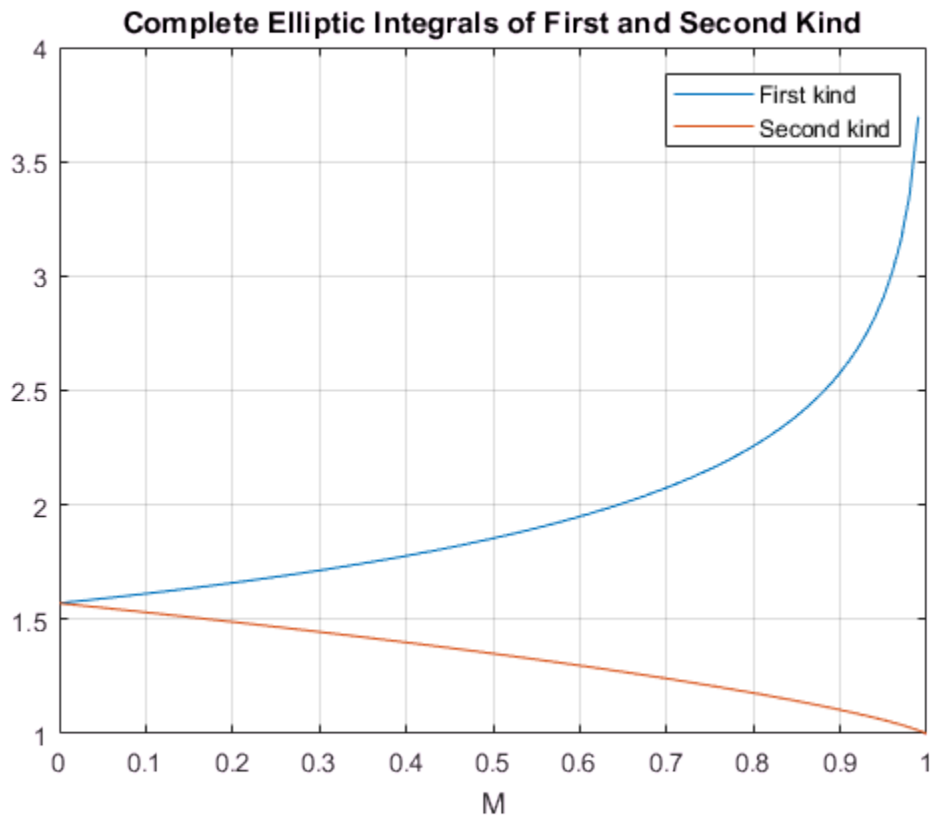

Faster Calculations of the Complete Elliptic Integrals by Changing the Tolerance

The default value of `tol` is `eps`. Find the runtime with the default value for arbitrary `M` using `tic` and `toc`. Increase `tol` by a factor of thousand and find the runtime. Compare the runtimes.

```
tic
ellipke(0.904561)
```

```
ans = 2.6001
```

```
toc
```

```
Elapsed time is 0.069834 seconds.
```

```
tic
ellipke(0.904561,eps*1000)
```

```
ans = 2.6001
```

```
toc
```

```
Elapsed time is 0.051232 seconds.
```

`ellipke` runs significantly faster when tolerance is significantly increased.

Input Arguments

M — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. `M` is limited to values $0 \le m \le 1$.

Data Types: `single` | `double`

tol — Accuracy of result

`eps` (default) | nonnegative real number

Accuracy of result, specified as a nonnegative real number. The default value is `eps`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

K — Complete elliptic integral of first kind

scalar | vector | matrix | multidimensional array

Complete elliptic integral of the first kind, returned as a scalar, vector, matrix, or multidimensional array.

E — Complete elliptic integral of second kind
scalar | vector | matrix | multidimensional array

Complete elliptic integral of the second kind, returned as a scalar, vector, matrix, or multidimensional array.

Definitions

Complete Elliptic Integrals of the First and Second Kind

The complete elliptic integral of the first kind is

$$[K(m)] = \int_0^1 [(1-t^2)(1-mt^2)]^{-\frac{1}{2}} dt.$$

where m is the first argument of `ellipke`.

The complete elliptic integral of the second kind is

$$E(m) = \int_0^1 (1-t^2)^{-\frac{1}{2}} (1-mt^2)^{\frac{1}{2}} dt.$$

Some definitions of the elliptic functions use the elliptical modulus k or modular angle α instead of the parameter m. They are related by

$$k^2 = m = \sin^2 \alpha.$$

References

[1] Abramowitz, M., and I. A. Stegun. *Handbook of Mathematical Functions*. Dover Publications, 1965.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`ellipj`

Introduced before R2006a

ellipsoid

Generate ellipsoid

Syntax

```
[x,y,z] = ellipsoid(xc,yc,zc,xr,yr,zr,n)
[x,y,z] = ellipsoid(xc,yc,zc,xr,yr,zr)
ellipsoid(axes_handle,...)
ellipsoid(...)
```

Description

`[x,y,z] = ellipsoid(xc,yc,zc,xr,yr,zr,n)` generates a surface mesh described by three `n+1`-by-`n+1` matrices, enabling `surf(x,y,z)` to plot an ellipsoid with center `(xc,yc,zc)` and semi-axis lengths `(xr,yr,zr)`.

`[x,y,z] = ellipsoid(xc,yc,zc,xr,yr,zr)` uses `n = 20`.

`ellipsoid(axes_handle,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`ellipsoid(...)` with no output arguments plots the ellipsoid as a surface.

Examples

Surface Plot of Ellipsoid

Generate data for an ellipsoid with a center at (0,0,0) and semi-axis lengths (5.9,3.25,3.25). Use `surf` to plot the ellipsoid.

```
[x, y, z] = ellipsoid(0,0,0,5.9,3.25,3.25,30);
figure
surf(x, y, z)
axis equal
```

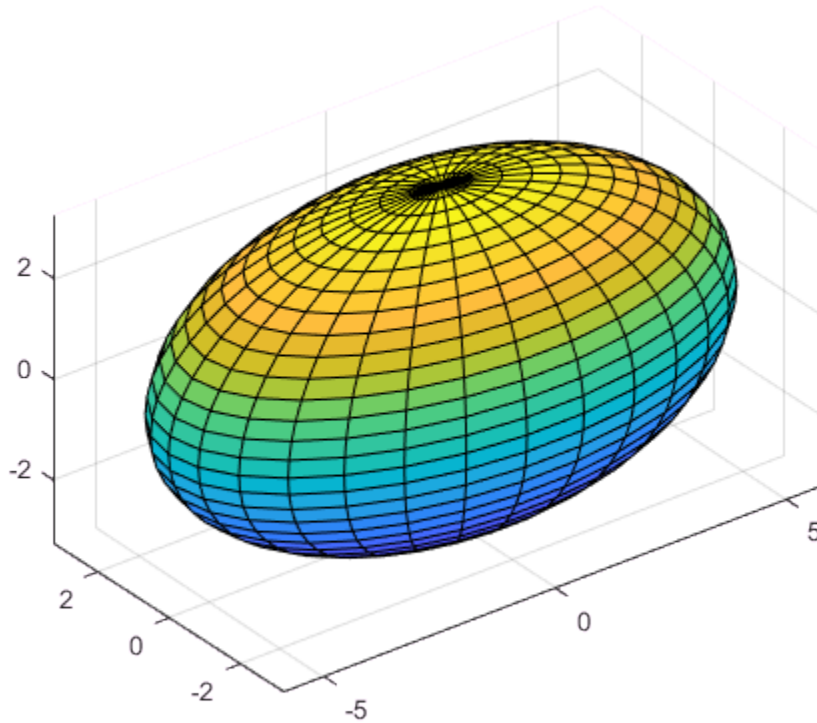

Algorithms

`ellipsoid` generates the data using the following equation:

$$\frac{(x-xc)^2}{xr^2}+\frac{(y-yc)^2}{yr^2}+\frac{(z-zc)^2}{zr^2}=1$$

Note that `ellipsoid(0,0,0,.5,.5,.5)` is equivalent to a unit sphere.

See Also

`cylinder` | `sphere` | `surf`

Introduced before R2006a

empty

Create empty array

Syntax

```
A = ClassName.empty
A = ClassName.empty(n,m,p,...)
A = ClassName.empty([n,m,p,...])
```

Description

Use `empty` to create empty arrays of the specified class, *`ClassName`*. Specify at least one dimension of the array as 0. MATLAB treats negative values as 0.

`A = ClassName.empty` returns an empty 0-by-0 array of the class of *`ClassName`*.

`A = ClassName.empty(n,m,p,...)` returns an empty rectangular array with the specified dimensions. At least one of the dimensions must be 0.

`A = ClassName.empty([n,m,p,...])` returns an empty rectangular array with the specified dimensions. At least one of the dimensions must be 0. This syntax is useful when using the values returned by the `size` function to define an empty array that is the same size as an existing empty array:

```
A = ClassName.empty(size(otherEmptyArray));
```

Input Arguments

`n,m,p,...`

Dimensions of the empty array. At least one of the specified dimensions must be 0.

Output Arguments

A

An empty array of the specified dimensions and of the class used in the method invocation.

Attributes

`empty` is a hidden, public, static method of all nonabstract MATLAB classes.

Access	Public
Hidden	true
Static	true

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Use `empty` to create a rectangular empty array of class `int16`:

```
A = int16.empty(5,0);
whos
  Name      Size            Bytes  Class    Attributes

  A         5x0                 0  int16
```

Using the `empty` method of the `int16` class to produce an empty array in which some dimensions are not zero is simpler than using conversion and reshape operations:

```
A = int16([]);
A = reshape(A,5,0);
whos
  Name      Size            Bytes  Class    Attributes

  A         5x0                 0  int16
```

Given the following definition for a class,

```
classdef ExEmpty
   properties
      Color = [1,0,0];
   end
   methods
      function obj = ExEmpty(c)
         if nargin > 0
            obj.Color = c;
         end
      end
   end
end
```

Create an empty array of class `ExEmpty`:

```
A = ExEmpty.empty;
 whos
  Name        Size            Bytes  Class     Attributes

  A           0x0             104  ExEmpty
```

One dimension of an empty array must be zero:

```
A5 = ExEmpty.empty(0,5);
 whos
  Name        Size            Bytes  Class     Attributes

  A5           0x5             104  ExEmpty
```

Empty object arrays follow array concatenation behavior:

```
B = [A,A5]
B =

  0x5 ExEmpty array with properties:

    Color
```

You cannot index into an empty array:

```
A5(1)
Index exceeds matrix dimensions.
```

You can use the `isempty`, `size`, and `length` functions to identify empty object arrays:

```
isempty(A5)

ans =

     1
size(A5)

ans =

     0     5
length(A5)

ans =

     0
```

Class of Empty Object Array

The `empty` method enables you to initialize arrays of a specific class:

```
C = char.empty(0,7)

C =

   Empty matrix: 0-by-7

disp(class(C))
char
```

Initializing an array with empty brackets (`[ ]`):

```
a = [];
```

produces an array of class `double`:

```
disp(class(a))
double
```

Tutorials

- "Empty Arrays"

- "Empty Matrices, Scalars, and Vectors"

See Also

`isempty` | `size` | `length`

Topics

"Empty Arrays"
"Empty Matrices, Scalars, and Vectors"

Introduced in R2008a

enableNETfromNetworkDrive

Enable access to .NET commands from network drive

Syntax

```
enableNETfromNetworkDrive
```

Description

`enableNETfromNetworkDrive` adds an entry for the MATLAB interface to .NET module to the security policy on your machine. You must have administrative privileges to change your configuration.

Compatibility

Use `enableNETfromNetworkDrive` for MATLAB releases R2012b or earlier, which support installed versions 2.0, 3.0, and 3.5 of the Microsoft .NET Framework.

See Also

Topics

"Troubleshooting Security Policy Settings from Network Drives"

Introduced in R2009b

enableservice

Enable, disable, or report status of MATLAB Automation server

Syntax

```
state = enableservice('AutomationServer',enable)
state = enableservice('AutomationServer')
```

Description

`state = enableservice('AutomationServer',enable)` enables or disables the MATLAB Automation server. If `enable` is `true` (logical `1`), `enableservice` converts an existing MATLAB session into an Automation server. If `enable` is `false` (logical `0`), `enableservice` disables the MATLAB Automation server. `state` indicates the previous state of the Automation server. If `state` = `1`, MATLAB was an Automation server. If `state` = `0`, MATLAB was not an Automation server.

`state = enableservice('AutomationServer')` returns the current state of the Automation server. If `state` is logical `1` (`true`), MATLAB is an Automation server.

COM functions are available on Microsoft Windows systems only.

Examples

Enable the Automation server in the current MATLAB session:

```
state = enableservice('AutomationServer',true);
```

Show the current state of the MATLAB session. MATLAB displays `true`:

```
state = enableservice('AutomationServer')
```

Enable the Automation server and show the previous state. MATLAB displays `true`. The previous state can be the same as the current state:

```
state = enableservice('AutomationServer',true)
```

To enable the Automation server every time you run MATLAB, see “Manually Create Automation Server”.

See Also

`actxserver`

Topics

“MATLAB COM Automation Server Interface”

Introduced before R2006a

end

Terminate block of code, or indicate last array index

Syntax

```
end
```

Description

`end` terminates `for`, `while`, `switch`, `try`, `if`, and `parfor` statements. Without an `end` statement, `for`, `while`, `switch`, `try`, `if`, and `parfor` wait for further input. Each `end` is paired with the closest previous unpaired `for`, `while`, `switch`, `try`, `if`, or `parfor` and serves to delimit its scope.

`end` also marks the termination of a function. Although it is sometimes optional, use `end` for better code readability. If your function contains one or more nested functions, then you must terminate every function in the file, whether nested or not, with `end`. This includes primary, nested, private, and local functions.

If your script contains local functions, then you must terminate every local function in the file with `end`.

The `end` function also serves as the last index in an indexing expression. In that context, `end` is the same as `size(X,k)` when used as part of the `k`th index into array `X`. Examples of this use are `X(3:end)` to select the third through final elements of the array, and `X(1,1:2:end-1)` to select all even elements of the first row, excluding the last element. When using `end` to grow an array, as in `X(end+1)=5`, make sure `X` exists first.

Examples

For Loops and Conditional Statements

Use `end` to close a `for` loop and an `if` statement.

```
a = [0 0 1 1 0 0 0 1 0];
for k = 1:length(a)
    if a(k) == 0
        a(k) = 2;
    end
end
```

Indexing Expressions

Access the last row of a matrix A using end.

```
A = magic(3)
```

```
A =

     8     1     6
     3     5     7
     4     9     2
```

```
B = A(end,1:end)
```

```
B =

     4     9     2
```

Tips

- Classes can overload the end function to implement specialized behavior. For more information, see “end as Object Index”.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`break` | `for` | `if` | `parfor` | `return` | `switch` | `try` | `while`

Introduced before R2006a

EndInvoke

Retrieve result of asynchronous call initiated by .NET System.Delegate BeginInvoke method

Syntax

```
result = EndInvoke(asyncResult)
[res0,...,resN] = EndInvoke(res0,...,resN,asyncResult)
```

Description

`result = EndInvoke(asyncResult)` retrieves result of asynchronous call initiated by `BeginInvoke` method.

`[res0,...,resN] = EndInvoke(res0,...,resN,asyncResult)` for methods with `out` and/or `ref` parameters.

Input Arguments

asyncResult

.NET System.IAsyncResult object returned by `BeginInvoke`.

res0,...,resN

For methods with `out` and/or `ref` parameters, results of the asynchronous call. The number of arguments is the sum of:

- Number of return values (`0` or `1`).
- Number of `out` and `ref` arguments.

Output Arguments

result

Results of the asynchronous call.

res0,...,resN

For methods with `out` and/or `ref` parameters, results of the asynchronous call,

Examples

The following examples show how to call delegates with various input and output arguments. Each example contains:

1. The C# delegate signature. In order to execute the MATLAB code, build the delegate code into an assembly named `SignatureExamples` and load it into MATLAB. For information, see "Build a .NET Application for MATLAB Examples".
2. An example MATLAB function to use with the delegate, which must exist on your path.
3. The `BeginInvoke` and `EndInvoke` signatures MATLAB creates. To display the signatures, create a delegate instance, `myDel`, and call the `methodsview` function.
4. Simple MATLAB example.

This example shows how to use a delegate that has no return value.

1. C# delegate:

   ```
   public delegate void delint(Int32 arg);
   ```

2. MATLAB function to call:

   ```
   % Display input argument
   function dispfnc(A)
   % A = number
   ['Input is ' num2str(A)]
   end
   ```

3. MATLAB creates the following signatures. For `BeginInvoke`:

   ```
   System.IAsyncResult RetVal
       BeginInvoke (
           SignatureExamples.delint this,
           int32 scalar arg,
           System.AsyncCallback callback,
           System.Object object)
   ```

   The `EndInvoke` signature:

```
    EndInvoke (
        SignatureExamples.delint this,
        System.IAsyncResult result)
```

4 Call `dispfnc`:

```
myDel = SignatureExamples.delint(@dispfnc);
asyncRes = myDel.BeginInvoke(6, [], []);
while asyncRes.IsCompleted ~= true
    pause(0.05) % Use pause() to let MATLAB process event
end
myDel.EndInvoke(asyncRes)
```

```
Input is 6
```

This example shows how to use a delegate with a return value. The delegate does not have `out` or `ref` parameters.

1 C# delegate:

```
public delegate Int32 del2int(Int32 arg1, Int32 arg2);
```

2 MATLAB function to call:

```
% Add input arguments
function res = addfnc(A, B)
% A and B are numbers
res = A + B;
end
```

3 MATLAB creates the following signatures. For `BeginInvoke`:

```
System.IAsyncResult RetVal
    BeginInvoke (
        SignatureExamples.del2int this,
        int32 scalar arg1,
        int32 scalar arg2,
        System.AsyncCallback callback,
        System.Object object)
```

The `EndInvoke` signature:

```
int32 scalar RetVal
    EndInvoke (
        SignatureExamples.del2int this,
        System.IAsyncResult result)
```

4 Call `addfnc`.

```
myDel = SignatureExamples.del2int(@addfnc);
asyncRes = myDel.BeginInvoke(6,8,[],[]);
while asyncRes.IsCompleted ~= true
    pause(0.05) % Use pause() to let MATLAB process event
end
result = myDel.EndInvoke(asyncRes)
```

```
result =
          14
```

This example shows how to use a delegate with a `ref` parameter, `refArg`, and no return value.

1 C# delegate:

```
public delegate void delrefvoid(ref Double refArg);
```

2 MATLAB maps the `ref` argument as both RHS and LHS arguments. MATLAB function to call.

```
% Increment input argument
function res = incfnc(A)
% A = number
res = A + 1;
end
```

3 MATLAB creates the following signatures. For `BeginInvoke`:

```
[System.IAsyncResult RetVal,
double scalar refArg]
    BeginInvoke (
        SignatureExamples.delrefvoid this,
        double scalar refArg,
        System.AsyncCallback callback,
        System.Object object)
```

The `EndInvoke` signature:

```
double scalar refArg
    EndInvoke (
        SignatureExamples.delrefvoid this,
        double scalar refArg,
        System.IAsyncResult result)
```

4 Call `incfnc`.

```
x = 6;
myDel = SignatureExamples.delrefvoid(@incfnc);
asyncRes = myDel.BeginInvoke(x,[],[]);
while asyncRes.IsCompleted ~= true
    pause(0.05) % Use pause() to let MATLAB process event
end
myRef = 0;
result = myDel.EndInvoke(myRef,asyncRes);
disp(['Increment of ' num2str(x) ' = ' num2str(result)]);
```

```
Increment of 6 = 7
```

This example shows how to use a delegate with an `out` parameter, `argOut`, and one return value.

1. C# delegate:

   ```
   public delegate Single deloutsingle(Single argIn, out Single argOut);
   ```

2. MATLAB maps the `out` argument as a return value for a total of two return values. MATLAB function to call.

   ```
   % Double input argument
   function [res1,res2] = times2fnc(A)
   res1 = A*2;
   res2 = res1;
   end
   ```

3. MATLAB creates the following signatures. For `BeginInvoke`.

   ```
   [System.IAsyncResult RetVal,
   single scalar argOut]
       BeginInvoke (
           SignatureExamples.deloutsingle this,
           single scalar argIn,
           System.AsyncCallback callback,
           System.Object object)
   ```

   The `EndInvoke` signature is:

   ```
   [single scalar RetVal,
   single scalar argOut]
       EndInvoke (
           SignatureExamples.deloutsingle this,
           System.IAsyncResult result)
   ```

4 Call `times2fnc`.

```
myDel = SignatureExamples.deloutsingle(@times2fnc);
asyncRes = myDel.BeginInvoke(6,[],[]);
while asyncRes.IsCompleted ~= true
    pause(0.05) % Use pause() to let MATLAB process event
end
[a1,a2] = myDel.EndInvoke(asyncRes);
a1
```

```
a1 =
    12
```

Tips

- If the delegate contains `out` or `ref` parameters, the signature for the `EndInvoke` method follows the MATLAB mapping rules. For information, see ".NET Delegates With out and ref Type Arguments".

See Also

`BeginInvoke`

Topics

"Calling .NET Methods Asynchronously"

External Websites

MSDN Calling Synchronous Methods Asynchronously

Introduced in R2011a

endsWith

Determine if string ends with pattern

Syntax

```
TF = endsWith(str,pattern)
TF = endsWith(str,pattern,'IgnoreCase',true)
```

Description

`TF = endsWith(str,pattern)` returns `1` (`true`) if `str` ends with the specified pattern, and returns `0` (`false`) otherwise.

If `pattern` is an array containing multiple patterns, then `endsWith` returns `1` if it finds that `str` ends with any element of `pattern`.

`TF = endsWith(str,pattern,'IgnoreCase',true)` ignores case when determining if `str` ends with `pattern`.

Examples

Determine If String Ends with Pattern

Create a string array that contains file names. Determine which file names end with the `.gz` extension.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["abstract.docx","data.tar.gz","mycode.m"; ...
       "data-analysis.ppt","results.ptx","temp-archive.gz"]
```

```
str = 2×3 string array
    "abstract.docx"        "data.tar.gz"    "mycode.m"
    "data-analysis.ppt"    "results.ptx"    "temp-archive.gz"
```

Return a logical array where the position of each element equal to 1 corresponds to the position of a string in str that ends with .gz.

```
pattern = ".gz";
TF = endsWith(str,pattern)
```

```
TF = 2×3 logical array
   0   1   0
   0   0   1
```

Display the file names that end with .gz. Index back into str using TF.

```
str(TF)
```

```
ans = 2×1 string array
    "data.tar.gz"
    "temp-archive.gz"
```

Test End of String Against Multiple Patterns

Create a string array that contains file names. Determine which file names end with the .docx, .xlsx, or .gz extensions.

Starting in R2017a, you can create strings using double quotes instead of the string function.

```
str = ["data.tar.gz","mycode.m","outputs.xlsx","results.pptx"]
```

```
str = 1×4 string array
    "data.tar.gz"    "mycode.m"    "outputs.xlsx"    "results.pptx"
```

```
pattern = [".docx",".xlsx",".gz"];
TF = endsWith(str,pattern)
```

```
TF = 1×4 logical array
   1   0   1   0
```

Display the file names that end with .docx, .xlsx, or .gz. Index back into str using TF.

```
str(TF)
```

```
ans = 1×2 string array
    "data.tar.gz"    "outputs.xlsx"
```

Ignore Case When Testing End of String

Create a string array that contains file names. Determine which file names end with the `.gz` extension, ignoring case.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["DATA.TAR.GZ","mycode.m","SUMMARY.PPT","tmp.gz"]
```

```
str = 1×4 string array
    "DATA.TAR.GZ"    "mycode.m"    "SUMMARY.PPT"    "tmp.gz"
```

```
pattern = ".gz";
TF = endsWith(str,pattern,'IgnoreCase',true)
```

```
TF = 1×4 logical array
   1   0   0   1
```

Display the file names that end with `.gz`. Index back into `str` using `TF`.

```
str(TF)
```

```
ans = 1×2 string array
    "DATA.TAR.GZ"    "tmp.gz"
```

Determine if Character Vector Ends With Pattern

Create a character vector that contains the name of a file. Determine whether the name ends with specified extensions.

```
chr = 'MyLatestPaper.docx'
```

```
chr =
'MyLatestPaper.docx'
```

```
TF = endsWith(chr,'docx')
```

```
TF = logical
   1
```

```
TF = endsWith(chr,'gz')
```

```
TF = logical
   0
```

- "Create String Arrays"
- "Search and Replace Text"
- "Compare Text"
- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`pattern` — Search pattern

string array | character vector | cell array of character vectors

Search pattern, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`contains` | `find` | `regexp` | `startsWith` | `strcmp` | `strfind`

Topics

“Create String Arrays”
“Search and Replace Text”
“Compare Text”
“Test for Empty Strings and Missing Values”

Introduced in R2016b

eomday

Last day of month

Syntax

```
E = eomday(Y,M)
```

Description

`E = eomday(Y,M)` returns the last day of the year and month given by corresponding elements of the numeric arrays `Y` and `M`.

Examples

Show the end of month for January through September for the year 1900:

```
eomday(1900, 1:9)
ans =
    31    28    31    30    31    30    31    31    30
```

Find the number of days during that period:

```
sum(eomday(1900, 1:9))
ans =
   273
```

Because 1996 is a leap year, the statement `eomday(1996,2)` returns `29`. To show all the leap years in the twentieth century, try:

```
y = 1900:1999;
E = eomday(y,2);
y(E == 29)

ans =
  Columns 1 through 6
     1904     1908     1912     1916     1920     1924
```

```
Columns 7 through 12
   1928     1932     1936     1940     1944     1948

Columns 13 through 18
   1952     1956     1960     1964     1968     1972

Columns 19 through 24
   1976     1980     1984     1988     1992     1996
```

See Also

datenum | datevec | weekday

Introduced before R2006a

enumeration

Display class enumeration members and names

Syntax

```
enumeration ClassName
enumeration(obj)
m = enumeration(ClassName)
m = enumeration(obj)
[m,s] = enumeration(ClassName)
[m,s] = enumeration(obj)
```

Description

`enumeration ClassName` displays the names of the enumeration members for the MATLAB class with the name `ClassName`.

`enumeration(obj)` displays the names of the enumeration members for the class of `obj`.

`m = enumeration(ClassName)` returns the enumeration members for the class in the column vector `m` of objects.

`m = enumeration(obj)` returns the enumeration members for the class of object, `obj`, in the column vector `m` of objects.

`[m,s] = enumeration(ClassName)` returns the names of the enumeration members in the cell array of strings `s`. The names in `s` correspond element-wise to the enumeration members in `m`.

`[m,s] = enumeration(obj)` returns the enumeration members for the class of object, `obj`, in the column vector `m` of objects. The names in `s` correspond element-wise to the enumeration members in `m`.

Input Arguments

ClassName

The name of the enumeration class, in single quotes.

obj

A instance of an enumeration class.

Output Arguments

m

Column vector of enumeration members.

s

Cell array of strings containing the enumeration names.

Examples

All examples use the following enumeration class.

```
classdef Bool < logical
   enumeration
      No  (0)
      Yes (1)
      Off (0)
      On  (1)
   end
end
```

Display the names of the enumeration members for class `Bool`:

```
enumeration Bool
```

```
Enumeration members for class 'Bool':

    No
```

```
    Yes
```

Get the enumeration members for class `Bool` in a column vector of objects:

```
members = enumeration('Bool')
```

```
members =

    No
    Yes
```

Get all available enumeration members and their names:

```
[members,names] = enumeration('Bool')
```

```
members =

    No
    Yes
    No
    Yes


names =

    'No'
    'Yes'
    'Off'
    'On'
```

Tutorials

- "Define Enumeration Classes"

Tips

- An enumeration class that derives from a built-in class can specify more than one name for a given enumeration member.
- When you call the `enumeration` function with no output arguments, MATLAB displays only the first name for each enumeration member (as specified in the class definition). To see all available enumeration members and their names, use the two output arguments. For example, `[m,s] = enumeration(obj);`.

See Also

`classdef`

Topics

"Define Enumeration Classes"

Introduced in R2009b

eps

Floating-point relative accuracy

Syntax

```
d = eps
d = eps(x)
d = eps(datatype)
```

Description

`d = eps` returns the distance from `1.0` to the next larger double-precision number, that is, `eps = 2^-52`.

`d = eps(x)`, where `x` has data type `single` or `double`, returns the positive distance from `abs(x)` to the next larger floating-point number of the same precision as `x`. If `x` has type `duration`, then `eps(x)` returns the next larger `duration` value. The command `eps(1.0)` is equivalent to `eps`.

`d = eps(datatype)` returns `eps` according to the data type specified by `datatype`, which can be either `'double'` or `'single'`. The syntax `eps('double')` (default) is equivalent to `eps`, and `eps('single')` is equivalent to `eps(single(1.0))`.

Examples

Accuracy in Double Precision

Display the distance from `1.0` to the next largest double-precision number.

```
d = eps
```

```
d = 2.2204e-16
```

`eps` is equivalent to `eps(1.0)` and `eps('double')`.

Compute `log2(eps)`.

```
d = log2(eps)
```

```
d = -52
```

In base 2, `eps` is equal to `2^-52`.

Find the distance from `10.0` to the next largest double-precision number.

```
d = eps(10.0)
```

```
d = 1.7764e-15
```

Accuracy in Single Precision

Display the distance from `1.0` to the next largest single-precision number.

```
d = eps('single')
```

```
d = single
    1.1921e-07
```

`eps('single')` is equivalent to `eps(single(1.0))`.

Compute `log2(eps('single'))`.

```
d = log2(eps('single'))
```

```
d = single
    -23
```

In base 2, single-precision `eps` is equal to `2^-23`.

Find the distance from the single-precision representation of 10.0 to the next largest single-precision number.

```
d = eps(single(10.0))
```

```
d = single
    9.5367e-07
```

Input Arguments

x — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. `d` is the same size as `x`. For all `x`, `eps(x) = eps(-x) = eps(abs(x))`. If `x` is complex, `d` is the distance to the next larger floating-point number in magnitude. If `x` is `Inf` or `NaN`, then `eps(x)` returns `NaN`.

Data Types: `single` | `double` | `duration`
Complex Number Support: Yes

`datatype` — Output data type
`'double'` (default) | `'single'`

Output data type, specified as `'double'` or `'single'`.

- `eps('double')` is equivalent to `eps` and `eps(1.0)`.
- `eps('single')` is equivalent to `eps(single(1.0))` and `single(2^-23)`.

Data Types: `char`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also
`double` | `duration` | `intmax` | `realmax` | `realmin` | `single`

Topics

Floating-Point Numbers

Introduced before R2006a

eq, ==

Determine equality

Syntax

```
A == B
eq(A,B)
```

Description

`A == B` returns a logical array with elements set to logical `1` (`true`) where arrays `A` and `B` are equal; otherwise, the element is logical `0` (`false`). The test compares both real and imaginary parts of numeric arrays. `eq` returns logical `0` (`false`) where `A` or `B` have NaN or undefined categorical elements.

`eq(A,B)` is an alternative way to execute `A == B`, but is rarely used. It enables operator overloading for classes.

Examples

Equality of Two Vectors

Create two vectors containing both real and imaginary numbers, then compare the vectors for equality.

```
A = [1+i 3 2 4+i];
B = [1 3+i 2 4+i];
A == B
```

```
ans = 1×4 logical array
   0   0   1   1
```

The `eq` function tests both real and imaginary parts for equality, and returns logical `1` (`true`) only where both parts are equal.

Find Characters

Create a character vector.

```
M = 'masterpiece';
```

Test for the presence of a specific character using ==.

```
M == 'e'
```

```
ans = 1×11 logical array
   0   0   0   0   1   0   0   0   1   0   1
```

The value of logical 1 (true) indicates the presence of the character 'e'.

Find Values in Categorical Array

Create a categorical array with two values: 'heads' and 'tails'.

```
A = categorical({'heads' 'heads' 'tails'; 'tails' 'heads' 'tails'})
```

```
A = 2×3 categorical array
     heads      heads      tails
     tails      heads      tails
```

Find all values in the 'heads' category.

```
A == 'heads'
```

```
ans = 2×3 logical array
   1   1   0
   0   1   0
```

A value of logical 1 (true) indicates a value in the category.

Compare the rows of A for equality.

```
A(1,:) == A(2,:)
```

```
ans = 1×3 logical array
   0   1   1
```

A value of logical `1` (`true`) indicates where the rows have equal category values.

Compare Floating-Point Numbers

Many numbers expressed in decimal text cannot be represented exactly as binary floating numbers. This leads to small differences in results that the == operator reflects.

Perform a few subtraction operations on numbers expressed in decimal and store the result in `C`.

```
C = 0.5-0.4-0.1
```

```
C = -2.7756e-17
```

With exact decimal arithmetic, `C` should be equal to *exactly* `0`. Its small value is due to the nature of binary floating-point arithmetic.

Compare `C` to `0` for equality.

```
C == 0
```

```
ans = logical
   0
```

Compare floating-point numbers using a tolerance, `tol`, instead of using ==.

```
tol = eps(0.5);
abs(C-0) < tol
```

```
ans = logical
   1
```

The two numbers, `C` and `0`, are closer to one another than two consecutive floating-point numbers near `0.5`. In many situations, `C` may act like `0`.

Compare Datetime Values

Compare the elements of two `datetime` arrays.

Create two `datetime` arrays in different time zones.

```
t1 = [2014,04,14,9,0,0;2014,04,14,10,0,0];
A = datetime(t1,'TimeZone','America/Los_Angeles');
A.Format = 'd-MMM-y HH:mm:ss Z'
```

```
A = 2×1 datetime array
   14-Apr-2014 09:00:00 -0700
   14-Apr-2014 10:00:00 -0700
```

```
t2 = [2014,04,14,12,0,0;2014,04,14,12,30,0];
B = datetime(t2,'TimeZone','America/New_York');
B.Format = 'd-MMM-y HH:mm:ss Z'
```

```
B = 2×1 datetime array
   14-Apr-2014 12:00:00 -0400
   14-Apr-2014 12:30:00 -0400
```

Check where elements in `A` and `B` are equal.

```
A==B
```

```
ans = 2×1 logical array
   1
   0
```

Input Arguments

A — Left array

scalar | vector | matrix | multidimensional array

Left array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs `A` and `B` must either be the same size or have sizes that are compatible (for example, `A` is an `M`-by-`N` matrix and `B` is a scalar or `1`-by-`N` row vector). For more information, see “Compatible Array Sizes for Basic Operations”.

If `A` and `B` are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is a categorical array, the other input can be a categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have the same sets of categories, including their order. If both inputs are categorical arrays that are not ordinal, they can have different sets of categories. See "Compare Categorical Array Elements" for more details.
- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.
- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

B — Right array

scalar | vector | matrix | multidimensional array

Right array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is a categorical array, the other input can be a categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have the same sets of categories, including their order. If both inputs are categorical arrays that are not ordinal, they can have different sets of categories. See "Compare Categorical Array Elements" for more details.
- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.

- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of `A` and `B` are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

Tips

- When comparing handle objects, use `==` to test whether objects have the same handle. Use `isequal` to determine if objects with different handles have equal property values.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- You cannot use `eq` to test equality between an enumeration member and a character array or cell array of character arrays.

See Also

See Also

`ge` | `gt` | `le` | `lt` | `ne`

Topics

"Array Comparison with Relational Operators"
"MATLAB Operators and Special Characters"

Introduced before R2006a

erase

Delete substrings within strings

Syntax

```
newStr = erase(str,match)
```

Description

`newStr = erase(str,match)` deletes all occurrences of `match` in `str`. The `erase` function returns the rest of the string as `newStr`.

If `match` is a string array or a cell array of character vectors, then `erase` deletes every occurrence of every element of `match` in `str`. The `str` and `match` arguments do not need to be the same size.

Examples

Delete Substrings from String Array

Create a string array and delete substrings from it. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["the quick brown fox jumps";
       "over the lazy dog"]
```

```
str = 2×1 string array
    "the quick brown fox jumps"
    "over the lazy dog"
```

Delete the substring `"the "` from `str`. The `erase` function deletes both instances.

```
newStr = erase(str,"the ")
```

```
newStr = 2×1 string array
    "quick brown fox jumps"
    "over lazy dog"
```

Delete multiple substrings from `str`.

```
match = ["the ","quick ","lazy "];
newStr = erase(str,match)
```

```
newStr = 2×1 string array
    "brown fox jumps"
    "over dog"
```

Delete Substring from Character Vector

Create a character vector. Delete the substring, `' World'`, including the space character.

```
chr = 'Hello World'
```

```
chr =
'Hello World'
```

```
newChr = erase(chr,' World')
```

```
newChr =
'Hello'
```

- "Create String Arrays"
- "Search and Replace Text"
- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

`match` — Text to delete

string array | character vector | cell array of character vectors

Text to delete, specified as a string array, a character vector, or a cell array of character vectors.

Tips

- To delete multiple occurrences of a match when the occurrences overlap, use the `strrep` function. `erase` only deletes the first occurrence when occurrences overlap.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`count` | `eraseBetween` | `extractAfter` | `extractBefore` | `extractBetween` | `insertAfter` | `insertBefore` | `join` | `pad` | `replace` | `replaceBetween` | `size` | `split` | `strlength` | `strsplit`

Topics

“Create String Arrays”
“Search and Replace Text”
“Test for Empty Strings and Missing Values”

Introduced in R2016b

eraseBetween

Delete substrings between indicators that mark starts and ends of substrings

Syntax

```
newStr = eraseBetween(str,startStr,endStr)
newStr = eraseBetween(str,startPos,endPos)
newStr = eraseBetween( ___ ,'Boundaries',bounds)
```

Description

`newStr = eraseBetween(str,startStr,endStr)` deletes all characters from `str` that occur between the substrings `startStr` and `endStr`, but does not delete `startStr` and `endStr` themselves. `eraseBetween` returns the remaining text as `newStr`.

If `str` is a string array or a cell array of character vectors, then `eraseBetween` deletes characters from each element of `str`. The output argument `newStr` has the same data type as `str`.

`newStr = eraseBetween(str,startPos,endPos)` deletes all characters from `str` that occur between the positions `startPos` and `endPos`, including the characters at those positions.

`newStr = eraseBetween( ___ ,'Boundaries',bounds)` forces the starts and ends specified in any of the previous syntaxes to be either inclusive or exclusive. They are inclusive when `bounds` is `'inclusive'`, and exclusive when `bounds` is `'exclusive'`. For example, `eraseBetween(str,startStr,endStr,'Boundaries','inclusive')` deletes `startStr`, `endStr`, and all the text between them.

Examples

Delete Text Between Substrings

Create string arrays. Then delete text that occurs between substrings.

Create a string. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "The quick brown fox"
```

```
str =
"The quick brown fox"
```

Delete the text that occurs between the substrings `"quick"` and `" fox"`. The `eraseBetween` function deletes the text but does not delete `"quick"` or `" fox"`.

```
newStr = eraseBetween(str,"quick"," fox")
```

```
newStr =
"The quick fox"
```

Delete substrings from each element of a string array. When you specify different substrings as start and end indicators, they must be contained in a string array or a cell array of character vectors that is the same size as `str`.

```
str = ["The quick brown fox jumps";"over the lazy dog"]
```

```
str = 2×1 string array
    "The quick brown fox jumps"
    "over the lazy dog"
```

```
startPos = ["quick";"the"];
endPos = [" fox";" dog"];
newStr = eraseBetween(str,startPos,endPos)
```

```
newStr = 2×1 string array
    "The quick fox jumps"
    "over the dog"
```

Delete Substrings Between Start and End Positions

Create string arrays and delete substrings between start and end positions that are specified as numbers.

Create a string that contains a name. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "Edgar Allen Poe"
```

```
str =
"Edgar Allen Poe"
```

Delete a substring. To delete the middle name and one of the space characters, specify the sixth and 11th positions in the string. The deleted substring incldues the sixth and 11th characters.

```
newStr = eraseBetween(str,6,11)
```

```
newStr =
"Edgar Poe"
```

Delete substrings from each element of a string array. When you specify different start and end positions with numeric arrays, they must be the same size as the input string array.

```
str = ["Edgar Allen Poe";"Louisa May Alcott"]
```

```
str = 2×1 string array
    "Edgar Allen Poe"
    "Louisa May Alcott"
```

```
startsPos = [6;7];
endPos = [11;10];
newStr = eraseBetween(str,startsPos,endPos)
```

```
newStr = 2×1 string array
    "Edgar Poe"
    "Louisa Alcott"
```

Delete Text with Inclusive and Exclusive Boundaries

Delete text from string arrays with boundaries that are forced to be inclusive or exclusive. `eraseBetween` deletes the boundaries when they are inclusive. `eraseBetween` returns the boundaries as part of the output string array when they are exclusive.

Create a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "small|medium|large"
```

```
str =
```

```
"small|medium|large"
```

Delete the text between sixth and 13th positions, but do not delete the characters at those positions.

```
newStr = eraseBetween(str,6,13,'Boundaries','exclusive')
```

```
newStr =
"small||large"
```

Delete the text between two substrings, and also the substrings themselves.

```
str = "The quick brown fox jumps over the lazy dog"
```

```
str =
"The quick brown fox jumps over the lazy dog"
```

```
newStr = eraseBetween(str," brown","lazy",'Boundaries','inclusive')
```

```
newStr =
"The quick dog"
```

Delete Text Between Positions in Character Vector

Create a character vector and delete text between start and end positions.

```
chr = 'mushrooms, peppers, and onions'
```

```
chr =
'mushrooms, peppers, and onions'
```

```
newChr = eraseBetween(chr,10,19)
```

```
newChr =
'mushrooms and onions'
```

Delete text between substrings.

```
newChr = eraseBetween(chr,'mushrooms',' and')
```

```
newChr =
'mushrooms and onions'
```

- “Create String Arrays”
- “Search and Replace Text”
- “Test for Empty Strings and Missing Values”

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`startStr` — String that indicates start of substring to delete

string array | character vector | cell array of character vectors

String that indicates the start of the substring to delete, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or a cell array of character vectors, then `startStr` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Example: `eraseBetween(str,"AB","YZ")` deletes all characters between `AB` and `YZ` in each element of `str`.

Example: If `str` is a 2-by-1 string array, then `eraseBetween(str,["AB";"FG"],["YZ";"ST"])` deletes all characters between `AB` and `YZ` in `str(1)`, and between `FG` and `ST` in `str(2)`.

Data Types: `string` | `char` | `cell`

`endStr` — String that indicates end of substring to delete

string array | character vector | cell array of character vectors

String that indicates the end of the substring to delete, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or a cell array of character vectors, then `endStr` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Example: `eraseBetween(str,"AB","YZ")` deletes all characters between `AB` and `YZ` in each element of `str`.

Example: If `str` is a 2-by-1 string array, then `eraseBetween(str,["AB";"FG"],["YZ";"ST"])` deletes all characters between `AB` and `YZ` in `str(1)`, and between `FG` and `ST` in `str(2)`.

Data Types: `string` | `char` | `cell`

`startPos` — Start position of substring to delete

numeric array

Start position of substring to delete, specified as a numeric array.

If `str` is a string array or a cell array of character vectors, then `startPos` can be a numeric scalar or a numeric array of the same size as `str`.

Example: `eraseBetween(str,5,9)` deletes all characters from the fifth through the ninth positions in each element of `str`.

Example: If `str` is a 2-by-1 string array, then `eraseBetween(str,[5;10],[9;21])` deletes all characters from the fifth through the ninth positions in `str(1)`, and from the 10th through the 21st positions in `str(2)`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`endPos` — End position of substring to delete

numeric array

End position of substring to delete, specified as a numeric array.

If `str` is a string array or a cell array of character vectors, then `endPos` can be a numeric scalar or a numeric array of the same size as `str`.

Example: `eraseBetween(str,5,9)` deletes all characters from the fifth through the ninth positions in each element of `str`.

Example: If `str` is a 2-by-1 string array, then `eraseBetween(str,[5;10],[9;21])` deletes all characters from the fifth through the ninth positions in `str(1)`, and from the 10th through the 21st positions in `str(2)`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`newStr` — Output text

string array | character vector | cell array of character vectors

Output text, returned as a string array, a character vector, or a cell array of character vectors. `str` and `newStr` have the same data type.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`count` | `erase` | `extractAfter` | `extractBefore` | `extractBetween` | `insertAfter` | `insertBefore` | `join` | `replace` | `replaceBetween` | `size` | `split` | `strlength`

Topics

“Create String Arrays”
“Search and Replace Text”
“Test for Empty Strings and Missing Values”

Introduced in R2016b

erf

Error function

Syntax

```
erf(x)
```

Description

`erf(x)` returns the "Error Function" on page 1-2875 evaluated for each element of `x`.

Examples

Find Error Function

Find the error function of a value.

```
erf(0.76)
```

```
ans = 0.7175
```

Find the error function of the elements of a vector.

```
V = [-0.5 0 1 0.72];
erf(V)
```

```
ans =

   -0.5205         0    0.8427    0.6914
```

Find the error function of the elements of a matrix.

```
M = [0.29 -0.11; 3.1 -2.9];
erf(M)
```

```
ans =

    0.3183   -0.1236
    1.0000   -1.0000
```

Find Cumulative Distribution Function of Normal Distribution

The cumulative distribution function (CDF) of the normal, or Gaussian, distribution with standard deviation σ and mean μ is

$$\phi(x) = \frac{1}{2}\left(1 + \mathrm{erf}\left(\frac{x-\mu}{\sigma\sqrt{2}}\right)\right).$$

Note that for increased computational accuracy, you can rewrite the formula in terms of `erfc` . For details, see “Tips”.

Plot the CDF of the normal distribution with $\mu = 0$ and $\sigma = 1$.

```
x = -3:0.1:3;
y = (1/2)*(1+erf(x/sqrt(2)));
plot(x,y)
grid on
title('CDF of normal distribution with \mu = 0 and \sigma = 1')
xlabel('x')
ylabel('CDF')
```

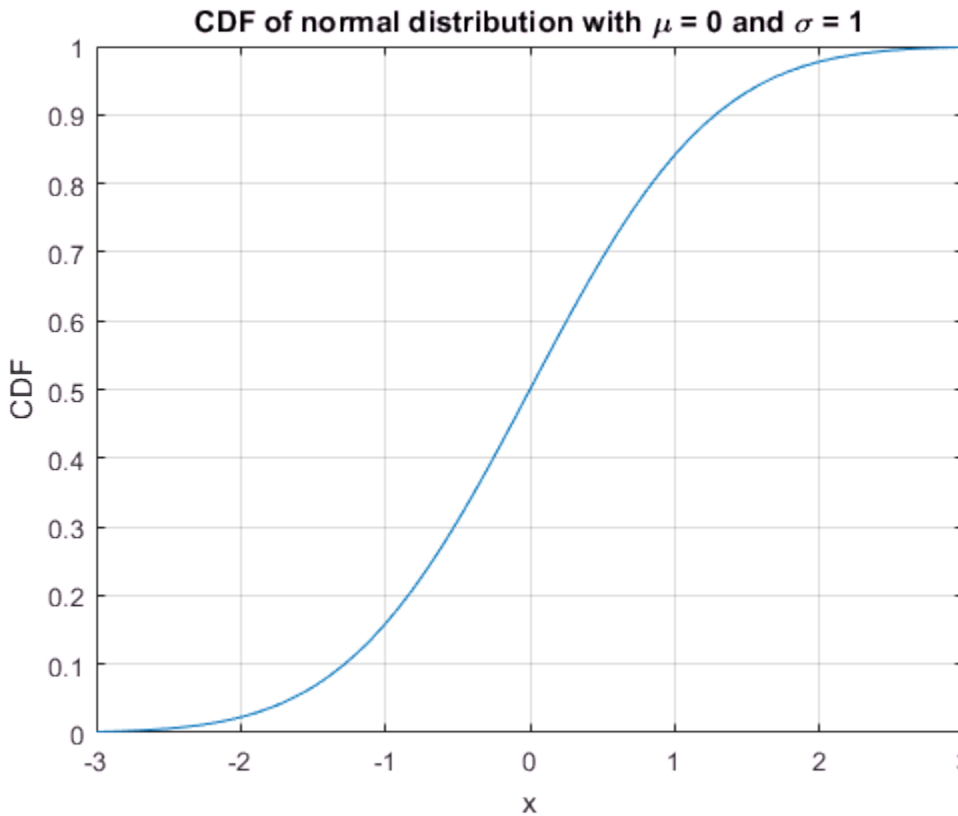

Calculate Solution of Heat Equation with Initial Condition

Where $u(x, t)$ represents the temperature at position x and time t, the heat equation is

$$\frac{\partial u}{\partial t} = c\frac{\partial^2 u}{\partial x^2},$$

where c is a constant.

For a material with heat coefficient k, and for the initial condition $u(x,0) = a$ for $x > b$ and $u(x,0) = 0$ elsewhere, the solution to the heat equation is

$$u(x,t) = \frac{a}{2}\left(\mathrm{erf}\left(\frac{x-b}{\sqrt{4kt}}\right)\right).$$

For `k = 2`, `a = 5`, and `b = 1`, plot the solution of the heat equation at times `t = 0.1`, `5`, and `100`.

```
x = -4:0.01:6;
t = [0.1 5 100];
a = 5;
k = 2;
b = 1;
figure(1)
hold on
for i = 1:3
    u(i,:) = (a/2)*(erf((x-b)/sqrt(4*k*t(i))));
    plot(x,u(i,:))
end
grid on
xlabel('x')
ylabel('Temperature')
legend('t = 0.1','t = 5','t = 100','Location','best')
title('Temperatures across material at t = 0.1, t = 5, and t = 100')
```

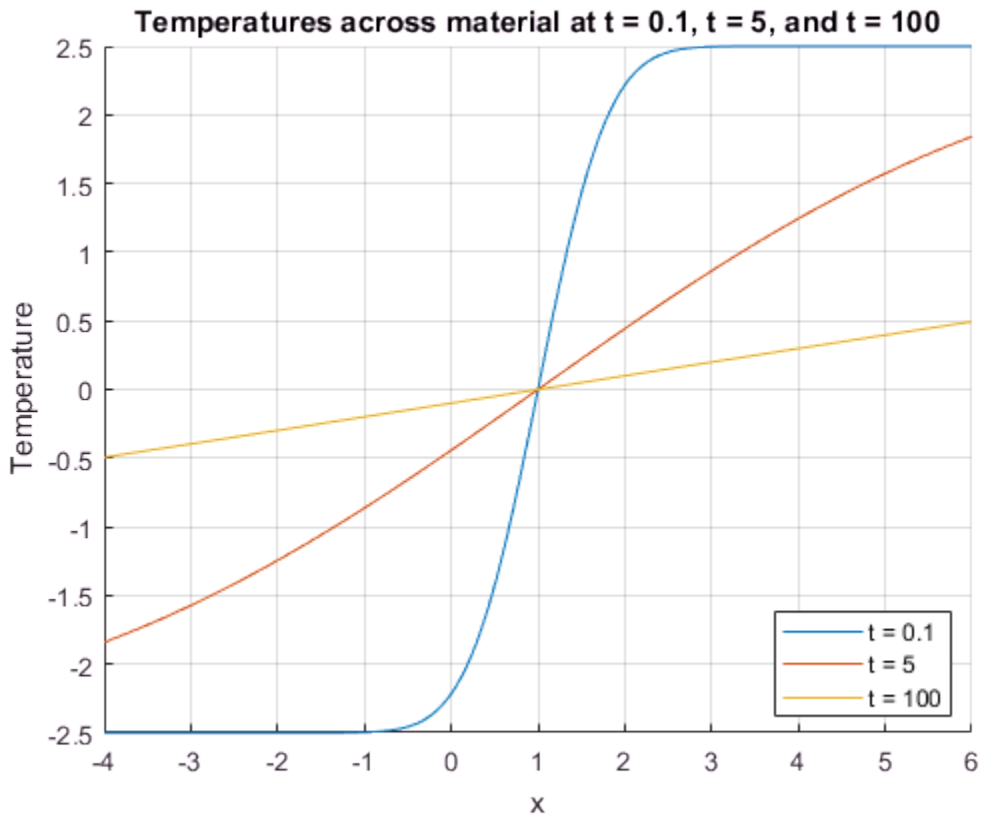

Input Arguments

x — Input

real number | vector of real numbers | matrix of real numbers | multidimensional array of real numbers

Input, specified as a real number, or a vector, matrix, or multidimensional array of real numbers. x cannot be sparse.

Data Types: `single` | `double`

Definitions

Error Function

The error function erf of x is

$$\mathrm{erf}(x)=\frac{2}{\sqrt{\pi}}\int_0^x e^{-t^2}\,dt.$$

Tips

- You can also find the standard normal probability distribution using the Statistics and Machine Learning Toolbox™ function `normcdf`. The relationship between the error function `erf` and `normcdf` is

$$\mathrm{normcdf}\,(x)=\frac{1}{2}\left(1-\mathrm{erf}\left(\frac{-x}{\sqrt{2}}\right)\right).$$

- For expressions of the form `1 - erf(x)`, use the complementary error function `erfc` instead. This substitution maintains accuracy. When `erf(x)` is close to `1`, then `1 - erf(x)` is a small number and might be rounded down to `0`. Instead, replace `1 - erf(x)` with `erfc(x)`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`erfc` | `erfcinv` | `erfcx` | `erfinv`

Introduced before R2006a

erfc

Complementary error function

Syntax

```
erfc(x)
```

Description

`erfc(x)` returns the "Complementary Error Function" on page 1-2880 evaluated for each element of `x`. Use the `erfc` function to replace `1 - erf(x)` for greater accuracy when `erf(x)` is close to `1`.

Examples

Find Complementary Error Function

Find the complementary error function of a value.

```
erfc(0.35)
```

```
ans = 0.6206
```

Find the complementary error function of the elements of a vector.

```
V = [-0.5 0 1 0.72];
erfc(V)
```

```
ans =

    1.5205    1.0000    0.1573    0.3086
```

Find the complementary error function of the elements of a matrix.

```
M = [0.29 -0.11; 3.1 -2.9];
```

```
erfc(M)

ans =

    0.6817    1.1236
    0.0000    2.0000
```

Find Bit Error Rate of Binary Phase-Shift Keying

The bit error rate (BER) of binary phase-shift keying (BPSK), assuming additive white gaussian noise (AWGN), is

$$P_b = \frac{1}{2}\operatorname{erfc}\left(\sqrt{\frac{E_b}{N_0}}\right).$$

Plot the BER for BPSK for values of E_b/N_0 from 0dB to 10dB.

```
EbN0_dB = 0:0.1:10;
EbN0 = 10.^(EbN0_dB/10);
BER = 1/2.*erfc(sqrt(EbN0));
semilogy(EbN0_dB,BER)
grid on
ylabel('BER')
xlabel('E_b/N_0 (dB)')
title('Bit Error Rate for Binary Phase-Shift Keying')
```

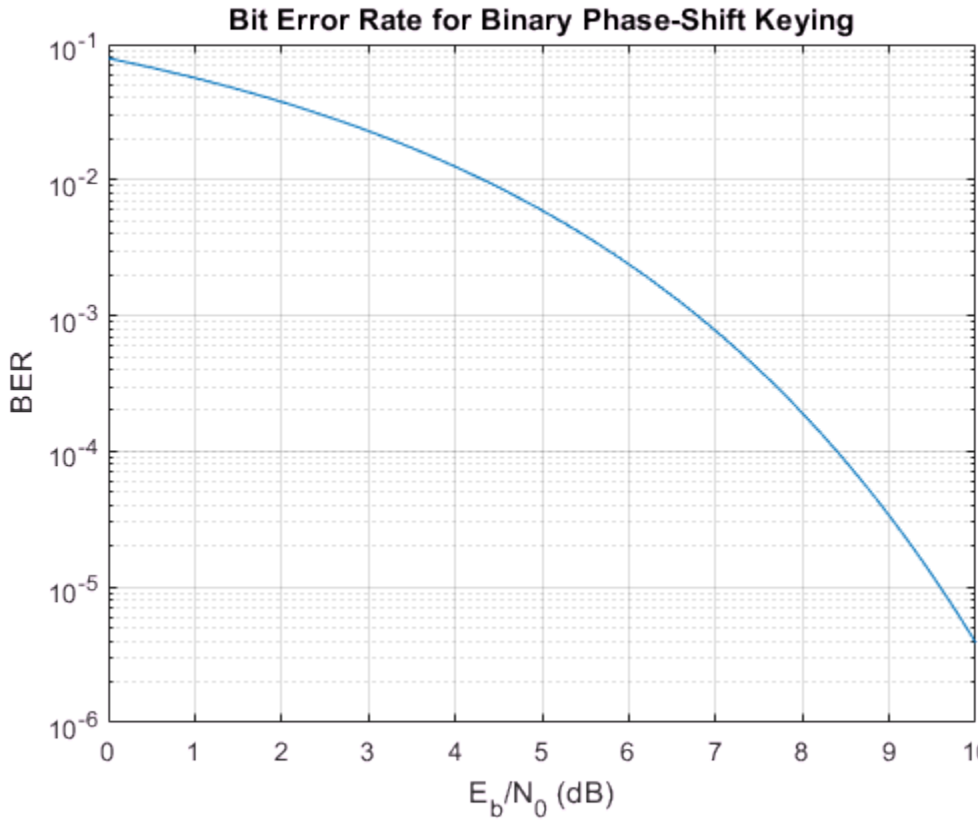

Avoid Roundoff Errors Using Complementary Error Function

You can use the complementary error function `erfc` in place of `1 - erf(x)` to avoid roundoff errors when `erf(x)` is close to `1`.

Show how to avoid roundoff errors by calculating `1 - erf(10)` using `erfc(10)`. The original calculation returns `0` while `erfc(10)` returns the correct result.

```
1 - erf(10)
```

```
ans = 0
```

```
erfc(10)
```

```
ans = 2.0885e-45
```

Input Arguments

x — Input

real number | vector of real numbers | matrix of real numbers | multidimensional array of real numbers

Input, specified as a real number, or a vector, matrix, or multidimensional array of real numbers. `x` cannot be sparse.

Data Types: `single` | `double`

Definitions

Complementary Error Function

The complementary error function of x is defined as

$$\begin{aligned}\operatorname{erfc}(x) &= \frac{2}{\sqrt{\pi}}\int_x^{\infty} e^{-t^2}\,dt \\ &= 1-\operatorname{erf}(x).\end{aligned}$$

It is related to the error function as

$$\operatorname{erfc}(x) = 1-\operatorname{erf}(x).$$

Tips

- You can also find the standard normal probability distribution using the Statistics and Machine Learning Toolbox function `normcdf`. The relationship between the error function `erfc` and `normcdf` is

$$\operatorname{normcdf}(x) = \left(\frac{1}{2}\right)\times\operatorname{erfc}\left(\frac{-x}{\sqrt{2}}\right)$$

- For expressions of the form `1 - erfc(x)`, use the error function `erf` instead. This substitution maintains accuracy. When `erfc(x)` is close to `1`, then `1 - erfc(x)` is a small number and might be rounded down to `0`. Instead, replace `1 - erfc(x)` with `erf(x)`.
- For expressions of the form `exp(x^2)*erfc(x)`, use the scaled complementary error function `erfcx` instead. This substitution maintains accuracy by avoiding roundoff errors for large values of `x`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`erf` | `erfcinv` | `erfcx` | `erfinv`

Introduced before R2006a

erfcinv

Inverse complementary error function

Syntax

```
erfcinv(x)
```

Description

`erfcinv(x)` returns the value of the "Inverse Complementary Error Function" on page 1-2883 for each element of `x`. For inputs outside the interval `[0 2]`, `erfcinv` returns `NaN`. Use the `erfcinv` function to replace expressions containing `erfinv(1-x)` for greater accuracy when `x` is close to `1`.

Examples

Find Inverse Complementary Error Function

```
erfcinv(0.3)
```

```
ans = 0.7329
```

Find the inverse complementary error function of the elements of a vector.

```
V = [-10 0 0.5 1.3 2 Inf];
erfcinv(V)
```

```
ans =

       NaN       Inf    0.4769   -0.2725      -Inf       NaN
```

Find the inverse complementary error function of the elements of a matrix.

```
M = [0.1 1.2; 1 0.9];
erfcinv(M)
```

```
ans =
```

```
    1.1631   -0.1791
         0    0.0889
```

Avoid Roundoff Errors Using Inverse Complementary Error Function

You can use the inverse complementary error function `erfcinv` in place of `erfinv(1-x)` to avoid roundoff errors when `x` is close to `0`.

Show how to avoid roundoff by calculating `erfinv(1-x)` using `erfcinv(x)` for `x = 1e-100`. The original calculation returns `Inf` while `erfcinv(x)` returns the correct result.

```
x = 1e-100;
erfinv(1-x)
```

```
ans = Inf
```

```
erfcinv(x)
```

```
ans = 15.0656
```

Input Arguments

x — Input

real number | vector of real numbers | matrix of real numbers | multidimensional array of real numbers

Input, specified as a real number, or a vector, matrix, or multidimensional array of real numbers. `x` cannot be sparse.

Data Types: `single` | `double`

Definitions

Inverse Complementary Error Function

The inverse complementary error function `erfcinv(x)` is defined as

$\mathrm{erfcinv}(\mathrm{erfc}(x)) = x.$

Tips

- You can also find the inverse standard normal probability distribution using the Statistics and Machine Learning Toolbox function `norminv`. The relationship between the inverse complementary error function `erfcinv` and `norminv` is

$$\text{norminv}(p) = \left(-\sqrt{2}\right) \times \text{erfcinv}(2p).$$

- For expressions of the form `erfcinv(1-x)`, use the inverse error function `erfinv` instead. This substitution maintains accuracy. When `x` is close to `1`, then `1 - x` is a small number and might be rounded down to `0`. Instead, replace `erfcinv(1-x)` with `erfinv(x)`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`erf` | `erfc` | `erfcx` | `erfinv`

Introduced before R2006a

erfcx

Scaled complementary error function

Syntax

```
erfcx(x)
```

Description

`erfcx(x)` returns the value of the "Scaled Complementary Error Function" on page 1-2886 for each element of `x`. Use the `erfcx` function to replace expressions containing `exp(x^2)*erfc(x)` to avoid underflow or overflow errors.

Examples

Find Scaled Complementary Error Function

```
erfcx(5)
```

```
ans = 0.1107
```

Find the scaled complementary error function of the elements of a vector.

```
V = [-Inf -1 0 1 10 Inf];
erfcx(V)
```

```
ans =

       Inf    5.0090    1.0000    0.4276    0.0561         0
```

Find the scaled complementary error function of the elements of a matrix.

```
M = [-0.5 15; 3.2 1];
erfcx(M)
```

```
ans =
```

```
    1.9524    0.0375
    0.1687    0.4276
```

Avoid Roundoff Errors Using Scaled Complementary Error Function

You can use the scaled complementary error function `erfcx` in place of `exp(x^2)*erfc(x)` to avoid underflow or overflow errors.

Show how to avoid roundoff errors by calculating `exp(35^2)*erfc(35)` using `erfcx(35)`. The original calculation returns `NaN` while `erfcx(35)` returns the correct result.

```
x = 35;
exp(x^2)*erfc(x)
```

```
ans = NaN
```

```
erfcx(x)
```

```
ans = 0.0161
```

Input Arguments

x — Input

real number | vector of real numbers | matrix of real numbers | multidimensional array of real numbers

Input, specified as a real number, or a vector, matrix, or multidimensional array of real numbers. `x` cannot be sparse.

Data Types: `single` | `double`

Definitions

Scaled Complementary Error Function

The scaled complementary error function `erfcx(x)` is defined as

$$\mathrm{erfcx}(x) = e^{x^2}\,\mathrm{erfc}(x).$$

For large `X`, `erfcx(X)` is approximately $\left(\frac{1}{\sqrt{\pi}}\right)\frac{1}{x}$.

Tips

- For expressions of the form `exp(-x^2)*erfcx(x)`, use the complementary error function `erfc` instead. This substitution maintains accuracy by avoiding roundoff errors for large values of `x`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`erf` | `erfc` | `erfcinv` | `erfinv`

Introduced before R2006a

erfinv

Inverse error function

Syntax

```
erfinv(x)
```

Description

`erfinv(x)` returns the "Inverse Error Function" on page 1-2892 evaluated for each element of `x`. For inputs outside the interval `[-1 1]`, `erfinv` returns `NaN`.

Examples

Find Inverse Error Function of Value

```
erfinv(0.25)
```

```
ans = 0.2253
```

For inputs outside `[-1,1]`, `erfinv` returns `NaN`. For `-1` and `1`, `erfinv` returns `-Inf` and `Inf`, respectively.

```
erfinv([-2 -1 1 2])
```

```
ans =

   NaN  -Inf   Inf   NaN
```

Find the inverse error function of the elements of a matrix.

```
M = [0 -0.5; 0.9 -0.2];
erfinv(M)
```

```
ans =

         0   -0.4769
    1.1631   -0.1791
```

Plot the Inverse Error Function

Plot the inverse error function for -1 < x < 1.

```
x = -1:0.01:1;
y = erfinv(x);
plot(x,y)
grid on
xlabel('x')
ylabel('erfinv(x)')
title('Inverse Error Function for -1 < x < 1')
```

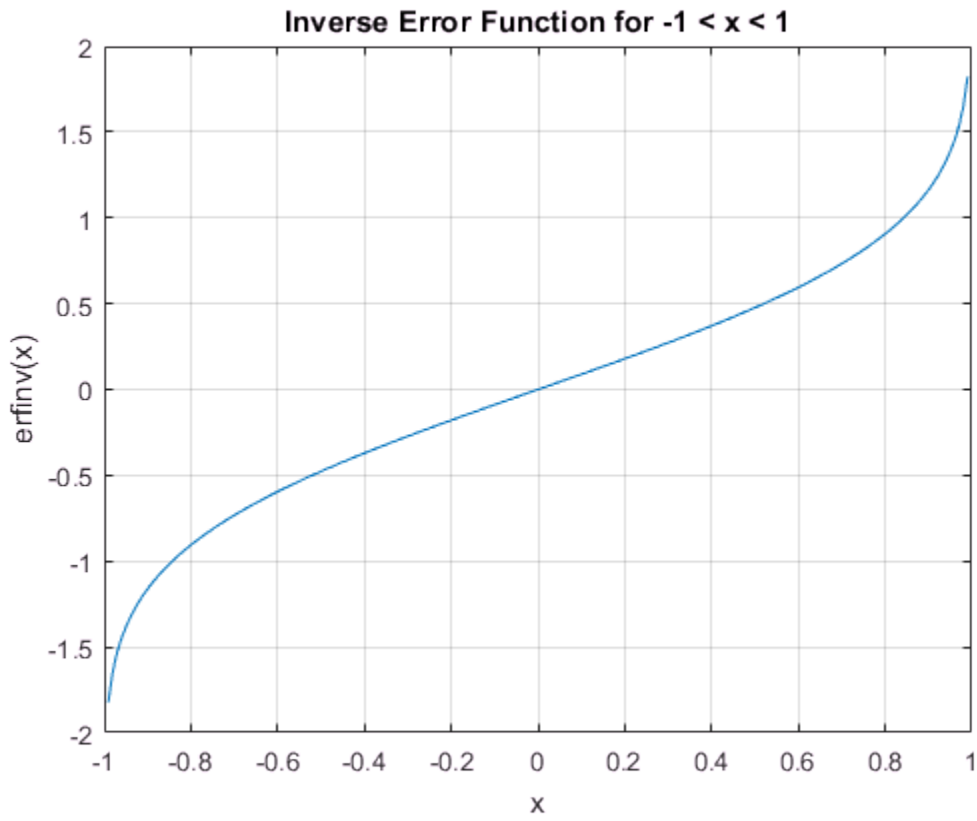

Generate Gaussian Distributed Random Numbers

Generate Gaussian distributed random numbers using uniformly distributed random numbers. To convert a uniformly distributed random number x to a Gaussian distributed random number y, use the transform

$$y = \sqrt{2}\,\mathrm{erf}^{-1}(x).$$

Note that because `x` has the form `-1 + 2*rand(1,10000)`, you can improve accuracy by using `erfcinv` instead of `erfinv`. For details, see "Tips".

Generate 10,000 uniformly distributed random numbers on the interval `[-1,1]`. Transform them into Gaussian distributed random numbers. Show that the numbers follow the form of the Gaussian distribution using a histogram plot.

```
rng('default')
x = -1 + 2*rand(1,10000);
y = sqrt(2)*erfinv(x);
h = histogram(y);
```

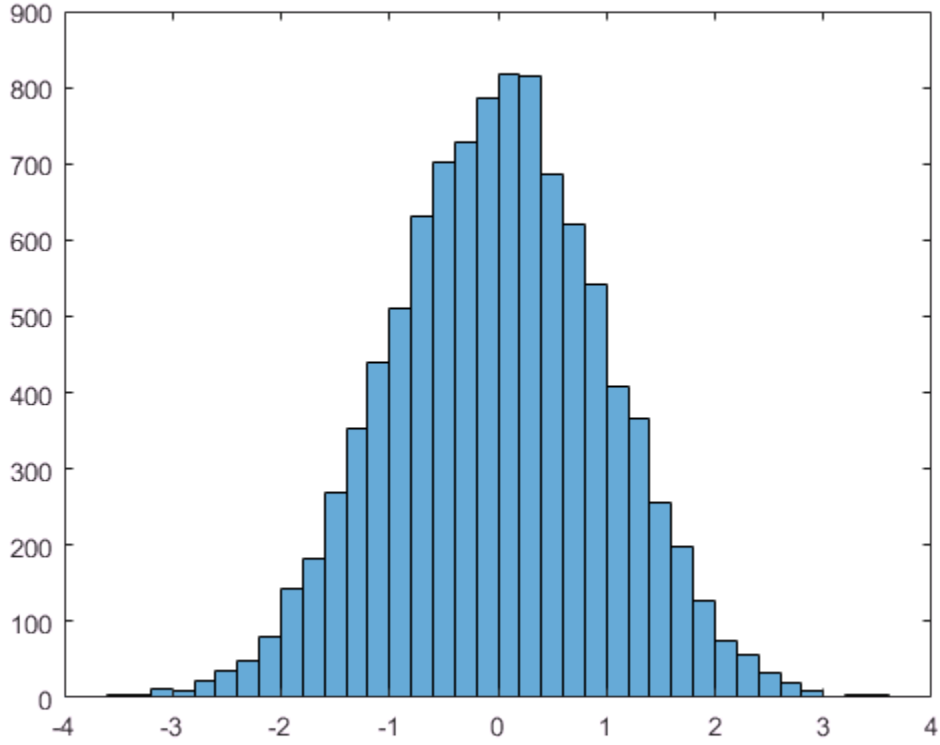

Input Arguments

x — Input

real number | vector of real numbers | matrix of real numbers | multidimensional array of real numbers

Input, specified as a real number, or a vector, matrix, or multidimensional array of real numbers. x cannot be sparse.

Data Types: `single` | `double`

Definitions

Inverse Error Function

The inverse error function erfinv is defined as the inverse of the error function, such that

$$\mathrm{erfinv}(\mathrm{erf}(x)) = x.$$

Tips

- For expressions of the form `erfinv(1-x)`, use the complementary inverse error function `erfcinv` instead. This substitution maintains accuracy. When `x` is close to `1`, then `1 - x` is a small number and may be rounded down to `0`. Instead, replace `erfinv(1-x)` with `erfcinv(x)`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`erf` | `erfc` | `erfcinv` | `erfcx`

Introduced before R2006a

error

Throw error and display message

Syntax

```
error(msg)
error(msg,A1,...,An)
error(msgID, ___ )
```

```
error(errorStruct)
```

Description

`error(msg)` throws an error and displays an error message.

`error(msg,A1,...,An)` displays an error message that contains formatting conversion characters, such as those used with the MATLAB `sprintf` function. Each conversion character in `msg` is converted to one of the values `A1,...,An`.

`error(msgID, ___ )` includes an error identifier on the exception. The identifier enables you to distinguish errors and to control what happens when MATLAB encounters the errors. You can include any of the input arguments in the previous syntaxes.

`error(errorStruct)` throws an error using the fields in a scalar structure.

Examples

Throw Error

```
msg = 'Error occurred.';
error(msg)
```

```
Error occurred.
```

Throw Error with Formatted Message

Throw a formatted error message with a line break. You must specify more than one input argument with `error` if you want MATLAB to convert special characters (such as

\n) in the error message. Include information about the class of variable n in the error message.

```
n = 7;
if ~ischar(n)
   error('Error. \nInput must be a char, not a %s.',class(n))
end
```

```
Error.
Input must be a char, not a double.
```

If you only use one input argument with error, then MATLAB does not convert \n to a line break.

```
if ~ischar(n)
   error('Error. \nInput must be a char.')
end
```

```
Error. \nInput must be a char.
```

Throw an error with an identifier.

```
if ~ischar(n)
   error('MyComponent:incorrectType',...
       'Error. \nInput must be a char, not a %s.',class(n))
end
```

```
Error.
Input must be a char, not a double.
```

Use the MException.last to view the last uncaught exception.

```
exception = MException.last
```

```
exception =

  MException with properties:

    identifier: 'MyComponent:incorrectType'
       message: 'Error.
Input must be a char, not a double.'
         cause: {0x1 cell}
```

```
         stack: [0x1 struct]
```

Throw Error Using Structure

Create structure with message and identifier fields. To keep the example simple, do not use the stack field.

```
errorStruct.message = 'Data file not found.';
errorStruct.identifier = 'MyFunction:fileNotFound';
```

```
errorStruct 

       message: 'Data file not found.'
    identifier: 'MyFunction:fileNotFound'
```

Throw the error.

```
error(errorStruct)
```

```
Data file not found.
```

- "Capture Information About Exceptions"

Input Arguments

msg — Information about error

character vector

Information about the error, specified as a character vector. This message displays as the error message. To format the character vector, use escape sequences, such as `\t` or `\n`. You also can use any format specifiers supported by the `sprintf` function, such as `%s` or `%d`. Specify values for the conversion specifiers via the `A1,...,An` input arguments. For more information, see "Formatting Text".

Note: You must specify more than one input argument with `error` if you want MATLAB to convert special characters (such as `\t`, `\n`, `%s`, and `%d`) in the error message.

Example: `'File not found.'`

msgID — Identifier for error

character vector

Identifier for the error, specified as a character vector. Use the error identifier to help identify the source of the error or to control a selected subset of the errors in your program.

The error identifier includes a `component` and `mnemonic`. The identifier must always contain a colon and follows this simple format: `component:mnemonic`. The `component` and `mnemonic` fields must each begin with a letter. The remaining characters can be alphanumerics (A–Z, a–z, 0–9) and underscores. No whitespace characters can appear anywhere in `msgID`. For more information, see "Message Identifiers".

Example: `'MATLAB:singularMatrix'`

Example: `'MATLAB:narginchk:notEnoughInputs'`

`A1,...,An` — Numeric or character arrays

scalar | vector | matrix | multidimensional array

Numeric or character arrays, specified as a scalar, vector, matrix, or multidimensional array. This input argument provides the values that correspond to and replace the conversion specifiers in `msg`.

`errorStruct` — Error reporting information

scalar structure

Error reporting information, specified as a scalar structure. The structure must contain at least one of these fields.

`message`	Error message. For more information, see `msg`.
`identifier`	Error message identifier. For more information, see `msgID`.
`stack`	Stack field for the error. When `errorStruct` includes a `stack` field, `error` uses it to set the stack field of the error. When you specify `stack`, use the absolute file name and the entire sequence of functions that nests the function in the stack frame. This character vector is the same as the one returned by `dbstack('-completenames')`.

Tips

- When you throw an error, MATLAB captures information about it and stores it in a data structure that is an object of the `MException` class. You can access information

in the exception object by using `try/catch`. Or, if your program terminates because of an exception and returns control to the Command Prompt, you can use `MException.last`.

- MATLAB does not cease execution of a program if an error occurs within a `try` block. In this case, MATLAB passes control to the `catch` block.
- If all inputs to `error` are empty, MATLAB does not throw an error.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

Has no effect in standalone code even when run-time error detection is enabled. See "Run-Time Error Detection and Reporting in Standalone C/C++ Code" (MATLAB Coder).

See Also

See Also

MException | MException.last | `assert` | `dbstack` | `errordlg` | `try` | `warning`

Topics

"Capture Information About Exceptions"

Introduced before R2006a

errorbar

Line plot with error bars

Syntax

```
errorbar(y,err)
errorbar(x,y,err)
errorbar(x,y,neg,pos)
errorbar( ___ ,ornt)

errorbar(x,y,yneg,ypos,xneg,xpos)

errorbar( ___ ,linespec)
errorbar( ___ ,Name,Value)
errorbar(ax, ___ )
e = errorbar( ___ )
```

Description

`errorbar(y,err)` creates a line plot of the data in `y` and draws a vertical error bar at each data point. The values in `err` determine the lengths of each error bar above and below the data points, so the total error bar lengths are double the `err` values.

`errorbar(x,y,err)` plots `y` versus `x` and draws a vertical error bar at each data point.

`errorbar(x,y,neg,pos)` draws a vertical error bar at each data point, where `neg` determines the length below the data point and `pos` determines the length above the data point, respectively.

`errorbar( ___ ,ornt)` sets the orientation of the error bars. Specify `ornt` as `'horizontal'` for horizontal error bars or `'both'` for both horizontal and vertical error bars. The default for `ornt` is `'vertical'`, which draws vertical error bars. Use this option after any of the previous input argument combinations.

`errorbar(x,y,yneg,ypos,xneg,xpos)` plots `y` versus `x` and draws both horizontal and vertical error bars. The `yneg` and `ypos` inputs set the lower and upper lengths of the

vertical error bars, respectively. The `xneg` and `xpos` inputs set the left and right lengths of the horizontal error bars.

`errorbar( ___ ,linespec)` sets the line style, marker symbol, and color. For example, `'--ro'` plots a dashed, red line with circle markers. The line style affects only the line and not the error bars.

`errorbar( ___ ,Name,Value)` modifies the appearance of the line and error bars using one or more name-value pair arguments. For example, `'CapSize',10` sets the lengths of the caps at the end of each error bar to 10 points.

`errorbar(ax, ___ )` creates the plot in the axes specified by `ax` instead of in the current axes. Specify the axes as the first input argument.

`e = errorbar( ___ )` returns one `ErrorBar` object when `y` is a vector. If `y` is a matrix, then it returns one `ErrorBar` object per column in `y`. Use `e` to modify properties of a specific `ErrorBar` object after it is created. For a list of properties, see Errorbar Properties.

Examples

Plot Vertical Error Bars of Equal Length

Create vectors `x` and `y`. Plot `y` versus `x`. At each data point, display vertical error bars that are equal in length.

```
x = 1:10:100;
y = [20 30 45 40 60 65 80 75 95 90];
err = 8*ones(size(y));
errorbar(x,y,err)
```

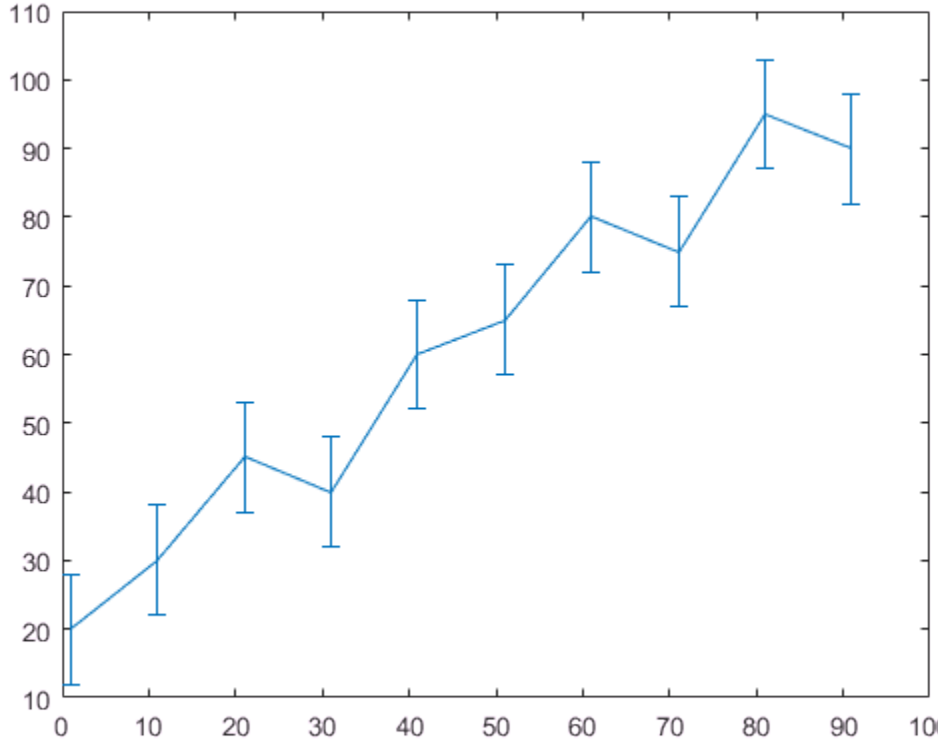

Plot Vertical Error Bars that Vary in Length

Create a line plot with error bars at each data point. Vary the lengths of the error bars.

```
x = 1:10:100;
y = [20 30 45 40 60 65 80 75 95 90];
err = [5 8 2 9 3 3 8 3 9 3];
errorbar(x,y,err)
```

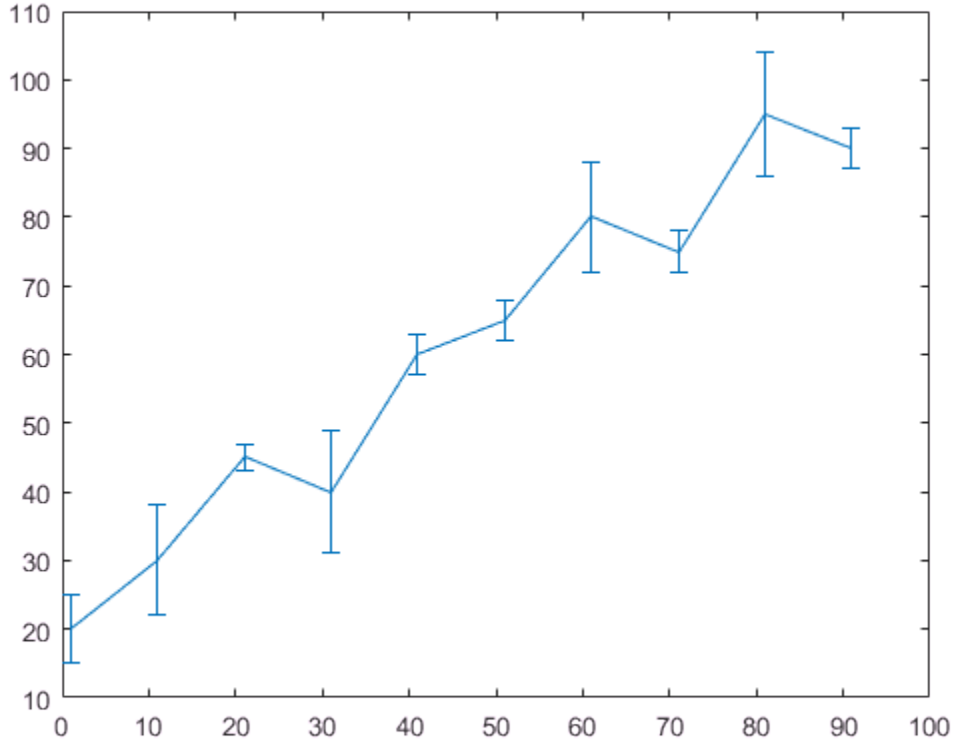

Plot Horizontal Error Bars

Create a line plot with horizontal error bars at each data point.

```
x = 1:10:100;
y = [20 30 45 40 60 65 80 75 95 90];
err = [1 3 5 3 5 3 6 4 3 3];
errorbar(x,y,err,'horizontal')
```

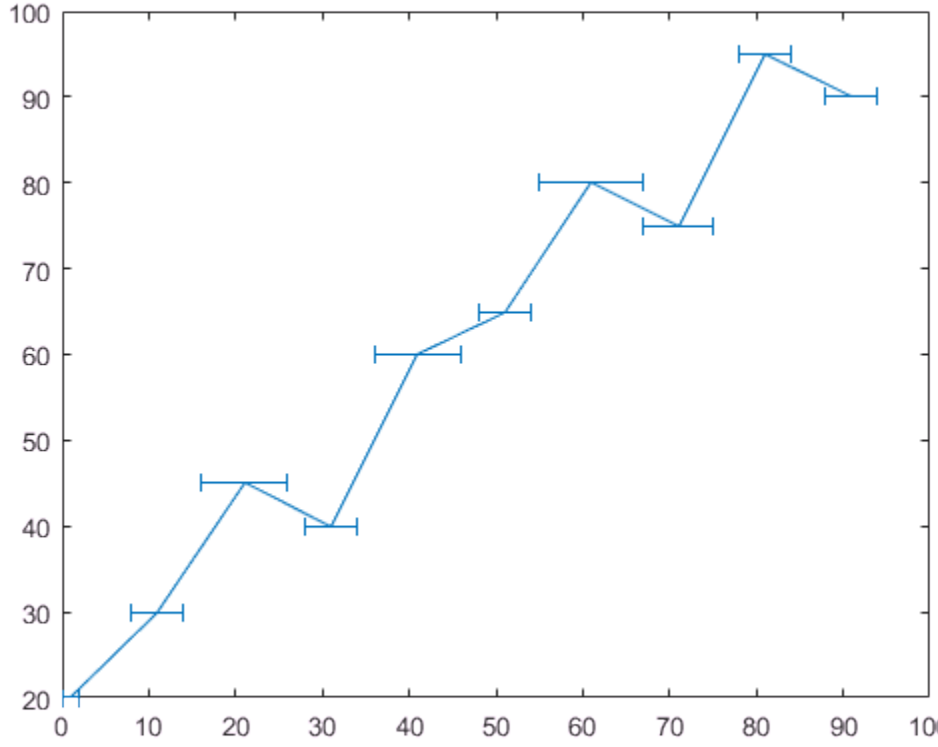

Plot Vertical and Horizontal Error Bars

Create a line plot with both vertical and horizontal error bars at each data point.

```
x = 1:10:100;
y = [20 30 45 40 60 65 80 75 95 90];
err = [4 3 5 3 5 3 6 4 3 3];
errorbar(x,y,err,'both')
```

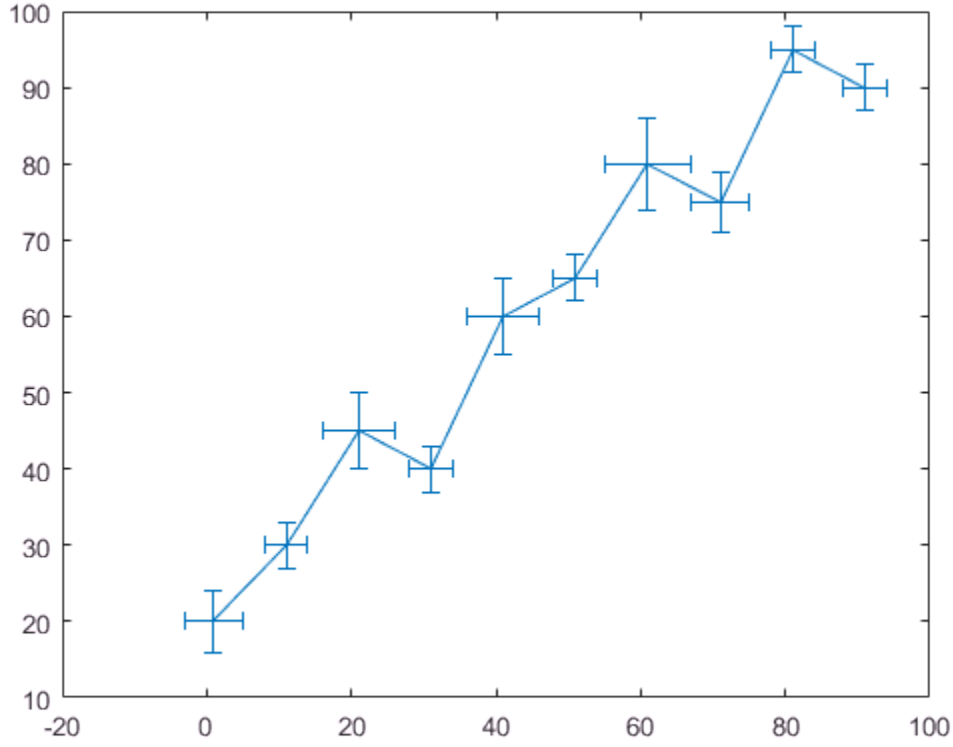

Plot Error Bars with No Line

Plot vectors `y` versus `x`. At each data point, display a circle marker with both vertical and horiztonal error bars. Do not display the line that connects the data points by omitting the line style option for the `linespec` input argument.

```
x = 1:10:100;
y = [20 30 45 40 60 65 80 75 95 90];
err = [4 3 5 3 5 3 6 4 3 3];
errorbar(x,y,err,'both','o')
```

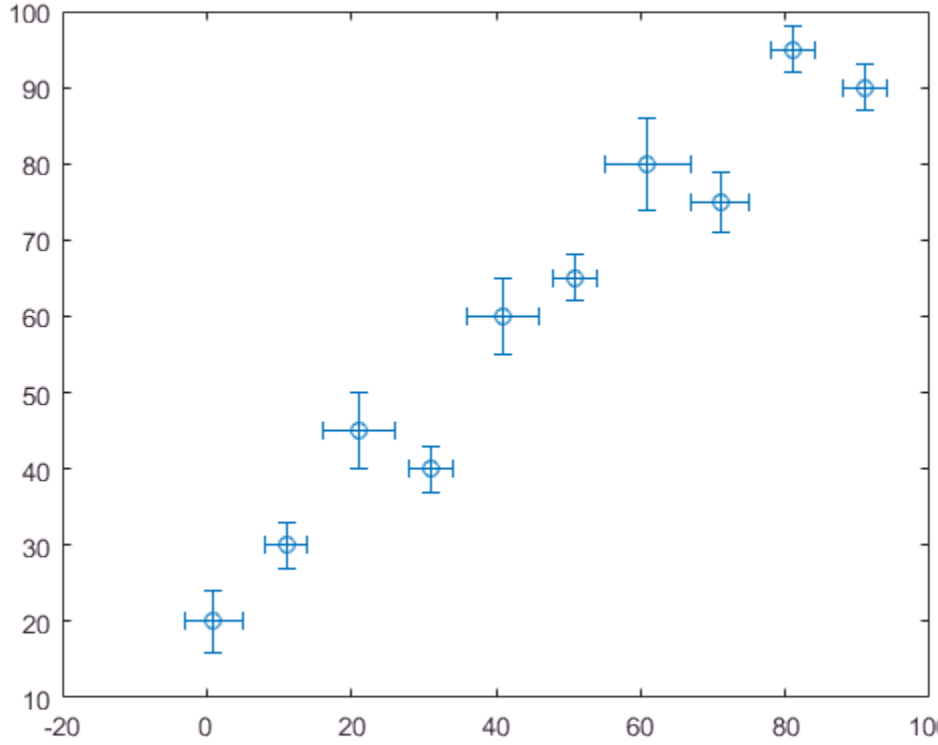

Control Error Bars Lengths in All Directions

Display both vertical and horizontal error bars at each data point. Control the lower and upper lengths of the vertical error bars using the `yneg` and `ypos` input argument options, respectively. Control the left and right lengths of the horizontal error bars using the `xneg` and `xpos` input argument options, respectively.

```
x = 1:10:100;
y = [20 30 45 40 60 65 80 75 95 90];
yneg = [1 3 5 3 5 3 6 4 3 3];
ypos = [2 5 3 5 2 5 2 2 5 5];
xneg = [1 3 5 3 5 3 6 4 3 3];
xpos = [2 5 3 5 2 5 2 2 5 5];
```

```
errorbar(x,y,yneg,ypos,xneg,xpos,'o')
```

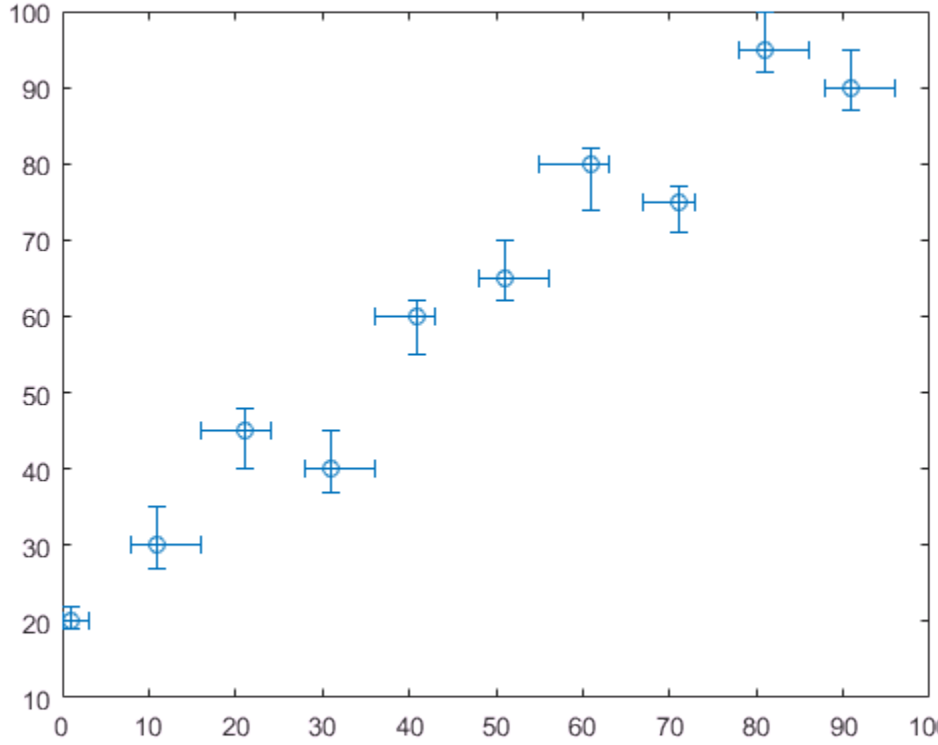

Add Colored Markers to Each Data Point

Create a line plot with error bars. At each data point, display a marker. Control the appearance of the marker using name-value pair arguments. Use `MarkerSize` to specify the marker size in points. Use `MarkerEdgeColor` and `MarkerFaceColor` to specify the marker outline and interior colors, respectively. Set the colors to either a character vector of a color name, such as `'red'`, or an RGB triplet.

```
x = linspace(0,10,15);
y = sin(x/2);
```

```
err = 0.3*ones(size(y));
errorbar(x,y,err,'-s','MarkerSize',10,...
    'MarkerEdgeColor','red','MarkerFaceColor','red')
```

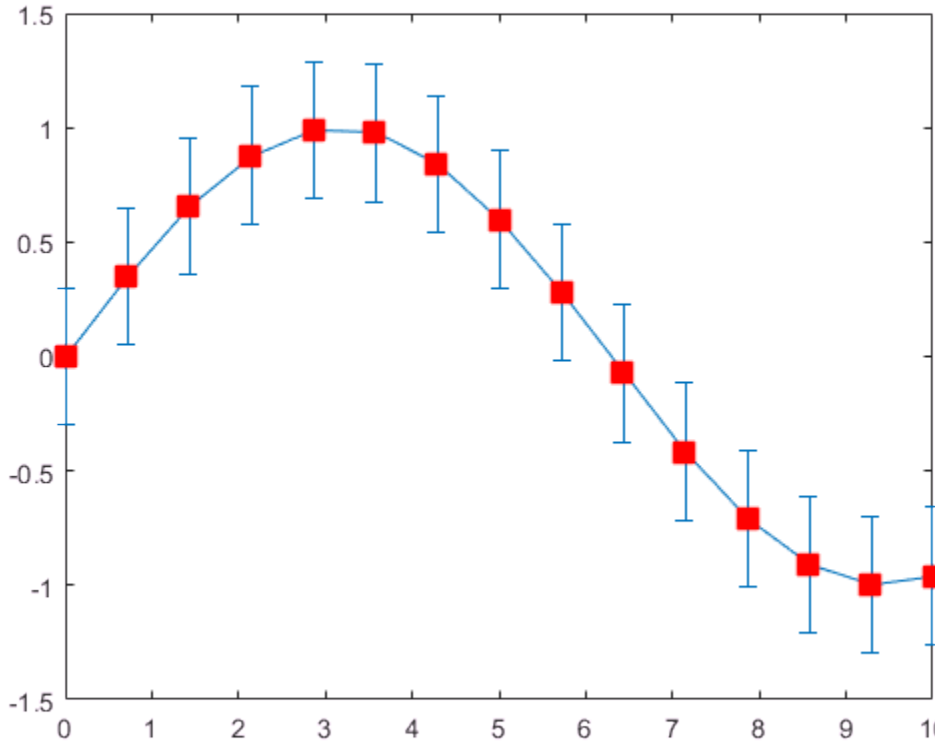

Control Error Bar Cap Size

Control the size of the caps at the end of each error bar by setting the `CapSize` property to a positive value in points.

```
x = linspace(0,2,15);
y = exp(x);
err = 0.3*ones(size(y));
```

```
errorbar(x,y,err,'CapSize',18)
```

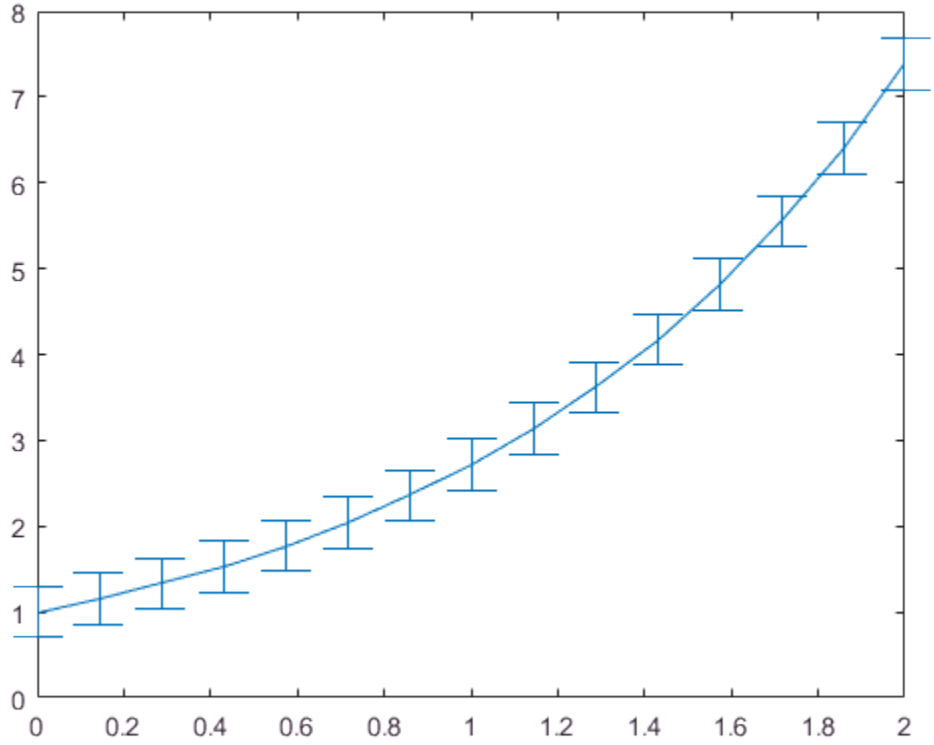

Modify Error Bars After Creation

Create a line plot with error bars. Assign the errorbar object to the variable e.

```
x = linspace(0,10,10);
y = sin(x/2);
err = 0.3*ones(size(y));
e = errorbar(x,y,err)
```

```
e =
  ErrorBar with properties:
```

```
            Color: [0 0.4470 0.7410]
        LineStyle: '-'
        LineWidth: 0.5000
           Marker: 'none'
            XData: [0 1.1111 2.2222 3.3333 4.4444 5.5556 6.6667 7.7778 8.8889 10]
            YData: [0 0.5274 0.8962 0.9954 0.7952 0.3558 -0.1906 -0.6797 -0.9643 -0.95
  XNegativeDelta: [1×0 double]
  XPositiveDelta: [1×0 double]
  YNegativeDelta: [0.3000 0.3000 0.3000 0.3000 0.3000 0.3000 0.3000 0.3000 0.3000 0.3
  YPositiveDelta: [0.3000 0.3000 0.3000 0.3000 0.3000 0.3000 0.3000 0.3000 0.3000 0.3

Show all properties
```

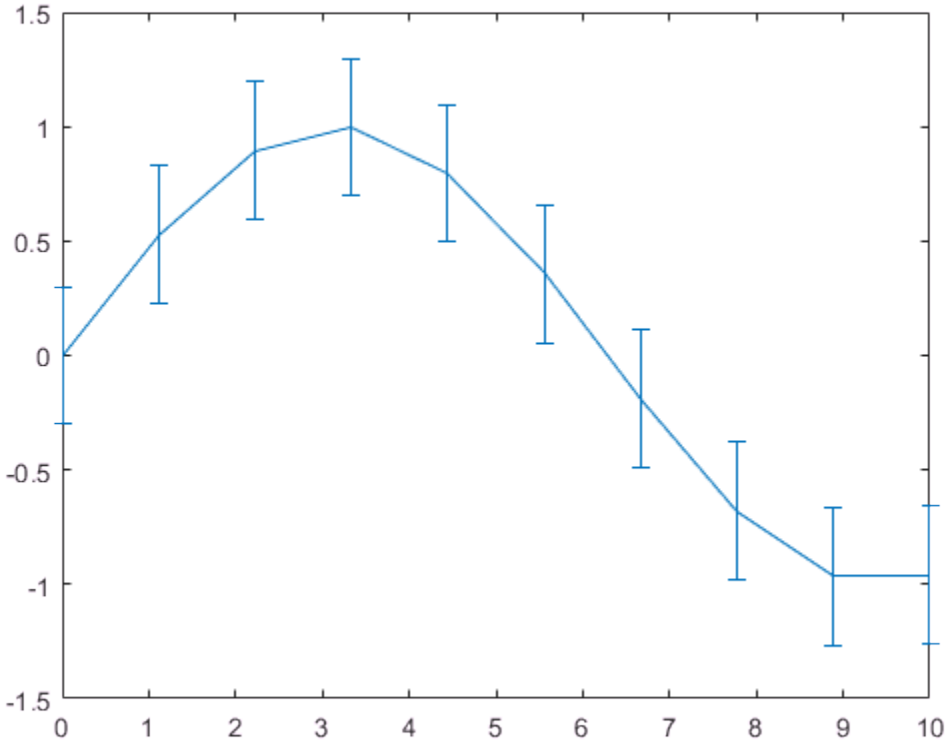

Use `e` to access properties of the errorbar object after it is created. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the `set` function instead.

```
e.Marker = '*';
e.MarkerSize = 10;
e.Color = 'red';
e.CapSize = 15;
```

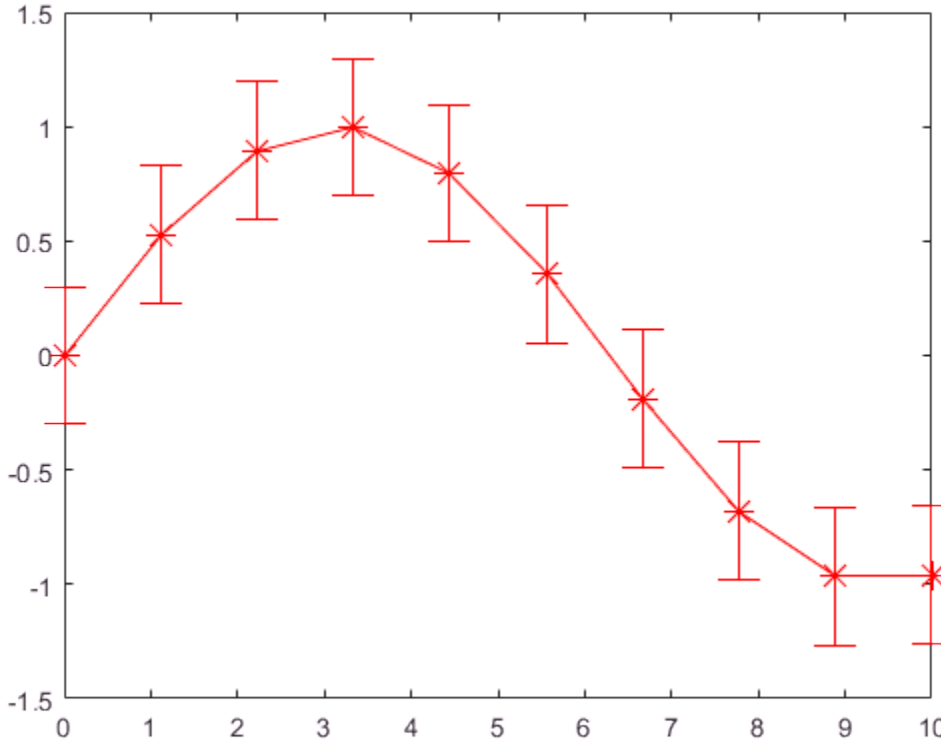

Input Arguments

y — *y* values
vector | matrix

y values, specified as a vector or a matrix.

- If `y` is a vector, then `errorbar` plots one line.
- If `y` is a matrix, then `errorbar` plots a separate line for each column in `y`.

Example: `y = [4 3 5 2 2 4];`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

x — *x* values
vector | matrix

x values, specified as a vector or a matrix. `x` must be the same size as `y`.

Example: `x = 0:10:100;`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

err — Error bar lengths for symmetrical error bars
vector | matrix

Error bar lengths for symmetrical error bars, specified as a vector or a matrix. `err` must be the same size as `y`. If you do not want to draw an error bar at a particular data point, then specify the length as `NaN`.

Example: `err = [.4 .3 .5 .2 .4 .5];`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

neg — Error bar lengths in negative direction
vector | matrix | `[]`

Error bar lengths in the negative direction, specified as a vector or matrix the same size as `y` or as an empty array `[]`.

- For vertical error bars, `neg` sets the length of the error bars below the data points.

- For horizontal error bars, `neg` sets the length of the error bars to the left of the data points.

If you do not want to draw the lower part of the error bar at a *particular* data point, then specify the length as `NaN`. If you do not want to draw the lower part of the error bar at *any* data point, then set `neg` to an empty array.

Example: `neg = [.4 .3 .5 .2 .4 .5];`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`pos` — Error bar lengths in positive direction

vector | matrix | `[]`

Error bar lengths in the positive direction, specified as a vector or matrix the same size as `y` or as an empty array `[]`.

- For vertical error bars, `pos` sets the length of the error bars above the data points.
- For horizontal error bars, `pos` sets the length of the error bars to the right of the data points.

If you do not want to draw the upper part of the error bar at a *particular* data point, then specify the length as `NaN`. If you do not want to draw the upper part of the error bar at *any* data point, then set `pos` to an empty array.

Example: `pos = [.4 .3 .5 .2 .4 .5];`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`yneg` — Vertical error bar lengths below data points

vector | matrix | `[]`

Vertical error bar lengths below the data points, specified as a vector or matrix the same size as `y` or as an empty array `[]`. Specify the values in data units.

If you do not want to draw the lower part of the error bar at a *particular* data point, then specify the value as `NaN`. If you do not want to draw the lower part of the error bar at *any* data point, then set `yneg` to an empty array.

Example: `yneg = [.4 .3 .5 .2 .4 .5];`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`ypos` — Vertical error bar lengths above data points

vector | matrix | `[]`

Vertical error bar lengths above the data points, specified as a vector or matrix the same size as `y` or as an empty array `[]`. Specify the values in data units.

If you do not want to draw the upper part of the error bar at a *particular* data point, then specify the length as `NaN`. If you do not want to draw the upper part of the error bar at *any* data point, then set `ypos` to an empty array.

Example: `ypos = [.4 .3 .5 .2 .4 .5];`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`xneg` — Horizontal error bar lengths to left of data points

vector | matrix | `[]`

Horizontal error bar lengths to the left of the data points, specified as a vector or matrix the same size as `y` or as an empty array `[]`. Specify the values in data units.

If you do not want to draw the left part of the error bar at a *particular* data point, then specify the length as `NaN`. If you do not want to draw the left part of the error bar at *any* data point, then set `xneg` to an empty array.

Example: `xneg = [.4 .3 .5 .2 .4 .5];`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`xpos` — Horizontal error bar lengths to right of data points

vector | matrix | `[]`

Horizontal error bar lengths to the right of the data points, specified as a vector or matrix the same size as `y` or as an empty array `[]`. Specify the values in data units.

If you do not want to draw the right part of the error bar at a *particular* data point, then specify the length as `NaN`. If you do not want to draw the right part of the error bar at *any* data point, then set `xpos` to an empty array.

Example: `xpos = [.4 .3 .5 .2 .4 .5];`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`ornt` — Error bar orientation

`'vertical'` (default) | `'horizontal'` | `'both'`

Error bar orientation, specified as one of these values:

- `'vertical'` — Vertical error bars
- `'horizontal'` — Horizontal error bars
- `'both'` — Vertical and horizontal error bars

Example: `errorbar(x,y,err,'horizontal')`

`linespec` — Line style, marker symbol, and color

character vector of symbols

Line style, marker symbol, and color, specified as a character vector of symbols. The symbols can appear in any order. You do not need to specify all three characteristics (line style, marker symbol, and color). For example, if you omit the line style and specify the marker, then the plot shows only the markers and no line. The line style affects only the line and not the error bars.

Example: `errorbar(x,y,err,'--or')` plots a red, dashed line with circle markers and red error bars at the data points.

Line Style	Description
`-`	Solid line (default)
`--`	Dashed line
`:`	Dotted line
`-.`	Dash-dot line

Marker	Description
`o`	Circle
`+`	Plus sign
`*`	Asterisk
`.`	Point
`x`	Cross

Marker	Description
s	Square
d	Diamond
^	Upward-pointing triangle
v	Downward-pointing triangle
>	Right-pointing triangle
<	Left-pointing triangle
p	Pentagram
h	Hexagram

Color	Description
y	yellow
m	magenta
c	cyan
r	red
g	green
b	blue
w	white
k	black

ax — Axes object

current axes (default) | axes object

Axes object. If you do not specify the axes, then `errorbar` plots into the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are only a subset. For a complete list, see Errorbar Properties.

Example: `errorbar(y,err,'LineWidth',2)` specifies a line width of 2 points.

`'CapSize'` — Length of caps at end of error bars
`6` (default) | positive value in points

Length of caps at end of error bars, specified as a positive value in points.

Example: `errorbar(x,y,err,'CapSize',10)`

`'LineWidth'` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

See Also

See Also

Functions
`bar` | `corrcoef` | `plot` | `std`

Properties
Errorbar Properties

Introduced before R2006a

ErrorBar Properties

Control error bar chart appearance and behavior

Description

`ErrorBar` properties control the appearance and behavior of an `ErrorBar` object. By changing property values, you can modify certain aspects of the error bar chart.

Starting in R2014b, you can use dot notation to query and set properties.

```
e = errorbar(...);
s = e.LineStyle;
e.LineStyle = ':';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Line and Error Bars

`LineStyle` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`Color` — Line color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`CapSize` — Length of caps at end of error bars

`6` (default) | positive value in points

Length of caps at end of error bars, specified as a positive value in points.

Example: `errorbar(x,y,err,'CapSize',10)`

`AlignVertexCenters` — Sharp vertical and horizontal lines

`'on'` (default) | `'off'`

Sharp vertical and horizontal lines, specified as `'on'` or `'off'`.

If the associated figure has a GraphicsSmoothing property set to `'on'` and a Renderer property set to `'opengl'`, then the figure applies a smoothing technique to plots. In some cases, this smoothing technique can cause vertical and horizontal lines to appear uneven in thickness or color. Use the `AlignVertexCenters` property to eliminate the uneven appearance.

- `'on'` — Sharpen vertical and horizontal lines to eliminate an uneven appearance.
- `'off'` — Do not sharpen vertical or horizontal lines. The lines might appear uneven in thickness or color.

Note: You must have a graphics card that supports this feature. To see if the feature is supported, type `opengl info`. If it is supported, then the returned fields contain the line `SupportsAlignVertexCenters: 1`.

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'*'` | `...`

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square

Value	Description
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerSize` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`

Long Name	Short Name	RGB Triplet
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

MarkerFaceColor — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Data

`XData` — *x* values

`[]` (default) | vector

x values, specified as a vector. The input argument `X` to the `errorbar` function sets the *x* values. If you do not specify `X`, then `errorbar` uses the indices of `YData` as the *x* values. `XData` and `YData` must have equal lengths.

Example: `1:10`

`XDataMode` — Selection mode for `XData`

`'auto'` (default) | `'manual'`

Selection mode for `XData`, specified as one of these values:

- `'auto'` — Use the indices of the values in `YData`.
- `'manual'` — Use manually specified values. To specify the values, set the `XData` property or specify the input argument `X` to the plotting function.

`XDataSource` — Variable linked to `XData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `XData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `XData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `XData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'x'`

`XNegativeDelta` — Horizontal error bar lengths to left of data points

vector | `[]`

Horizontal error bar lengths to the left of the data points, specified as a vector the same length as `YData` or as an empty array `[]`. Specify the values in data units.

- If you do not want to draw the left part of the error bar at a *particular* data point, then specify the value as `NaN`.
- If you do not want to draw the left part of the error bar at *any* data point, then set the property to an empty array.

Example: `e.XNegativeDelta = [.4 .3 .5 .2 .4 .5];`

`XNegativeDeltaSource` — Variable linked to `XNegativeDelta`

`''` (default) | character vector containing MATLAB workspace variable

Variable linked to `XNegativeDelta`, specified as a character vector containing a MATLAB workspace variable. MATLAB evaluates the variable to generate the `XNegativeDelta` values.

By default, there is no linked variable, so the value is an empty character vector, `''`. When you change the variable for this property, MATLAB does not update the `XNegativeDelta` values. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning. To render the graph, you must change all data source properties to appropriate values.

`XPositiveDelta` — Horizontal error bar lengths to right of data points

vector | `[]`

Horizontal error bar lengths to the right of the data points, specified as a vector the same length as `YData` or as an empty array `[]`. Specify the values in data units.

- If you do not want to draw the right part of the error bar at a *particular* data point, then specify the value as `NaN`.
- If you do not want to draw the right part of the error bar at *any* data point, then set the property to an empty array.

Example: `e.XPositiveDelta = [.4 .3 .5 .2 .4 .5];`

`XPositiveDeltaSource` — Variable linked to `XPositiveDelta`

`''` (default) | character vector containing MATLAB workspace variable

Variable linked to `XPositiveDelta`, specified as a character vector containing a MATLAB workspace variable. MATLAB evaluates the variable to generate the `XPositiveDelta` values.

By default, there is no linked variable, so the value is an empty character vector, `''`. When you change the variable for this property, MATLAB does not update the `XPositiveDelta` values. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning. To render the graph, you must change all data source properties to appropriate values.

`YData` — *y* values

`[ ]` (default) | vector

y values, specified as a vector. The input argument `Y` to the `errorbar` function sets the *y* values. `XData` and `YData` must have equal lengths.

`YDataSource` — Variable linked to `YData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `YData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `YData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `YData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'y'`

`YNegativeDelta` — Vertical error bar lengths below data points

vector | `[]`

Vertical error bar lengths below the data points, specified as a vector the same length as `YData` or as an empty array `[]`. Specify the values in data units.

- If you do not want to draw the lower part of the error bar at a *particular* data point, then specify the value as `NaN`.
- If you do not want to draw the lower part of the error bar at *any* data point, then set the property to an empty array.

Example: `e.YNegativeDelta = [.4 .3 .5 .2 .4 .5];`

`YNegativeDeltaSource` — Variable linked to `YNegativeDelta`

`''` (default) | character vector containing MATLAB workspace variable

Variable linked to `YNegativeDelta`, specified as a character vector containing a MATLAB workspace variable. MATLAB evaluates the variable to generate the `YNegativeDelta` values.

By default, there is no linked variable, so the value is an empty character vector, `''`. When you change the variable for this property, MATLAB does not update the `YNegativeDelta` values. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning. To render the graph, you must change all data source properties to appropriate values.

`YPositiveDelta` — Vertical error bar lengths above data points

vector | `[]`

Vertical error bar lengths above the data points, specified as a vector the same length as `YData` or as an empty array `[]`. Specify the values in data units.

- If you do not want to draw the upper part of the error bar at a particular data point, then specify the value as `NaN`.

- If you do not want to draw the upper part of the error bar at any data point, then set the property to an empty array.

Example: `e.YPositiveDelta = [.4 .3 .5 .2 .4 .5];`

`YPositiveDeltaSource` — Variable linked to `YPositiveDelta`

`''` (default) | character vector containing MATLAB workspace variable

Variable linked to `YPositiveDelta`, specified as a character vector containing a MATLAB workspace variable. MATLAB evaluates the variable to generate the `YPositiveDelta` values.

By default, there is no linked variable, so the value is an empty character vector, `''`. When you change the variable for this property, MATLAB does not update the `YPositiveDelta` values. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning. To render the graph, you must change all data source properties to appropriate values.

`LData` — Error bar lengths below data points (not recommended)

`[ ]` (default) | vector

Note: This property is not recommended. Use the `YNegativeDelta` property instead.

Errorbar lengths below the data points, specified as a vector with length equal to `XData` and `YData`. Specify the values in data units.

Example: `1:10`

`LDataSource` — Variable linked to `LData` (not recommended)

`''` (default) | character vector containing MATLAB workspace variable

---

Note: This property is not recommended. Use the `YNegativeDeltaSource` property instead.

Variable linked to `LData`, specified as a character vector containing a MATLAB workspace variable. MATLAB evaluates the variable to generate the `LData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you change the variable for this property, then MATLAB does not update the `LData` values. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

`UData` — Error bar lengths above data points (not recommended)

`[ ]` (default) | vector

Note: This property is not recommended. Use the `YPositiveDelta` property instead.

Error bar lengths above the data points, specified as a vector with length equal to `XData` and `YData`. Specify the values in data units.

Example: `1:10`

`UDataSource` — Variable linked to `UData` (not recommended)

`''` (default) | character vector containing MATLAB workspace variable

---

Note: This property is not recommended. Use the `YPositiveDeltaSource` property instead.

Variable linked to `UData`, specified as a character vector containing a MATLAB workspace variable. MATLAB evaluates the variable to generate the `UData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you change the variable for this property, then MATLAB does not update the `UData` values. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'errorbar'`

This property is read-only.

Type of graphics object, returned as `'errorbar'`. Use this property to find all objects of a given type within a plotting hierarchy, such as searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with

a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

Data Types: `char`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
```

```
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `ErrorBar` object that has a defined color.

You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `ErrorBar` object responds to the click or if an ancestor does.

- `'none'` — Cannot capture mouse clicks. Clicking the `ErrorBar` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `ErrorBar` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `ErrorBar` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `ErrorBar` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `ErrorBar` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`HitTestArea` — (removed) Extents of clickable area

`'off'` (default) | `'on'`

Note: `HitTestArea` has been removed. Use `PickableParts` instead.

Extents of clickable area, specified as one of these values:

- `'off'` — Click the object to select it. This is the default value.
- `'on'` — Click anywhere within the extent of the object to select it, that is, anywhere within the rectangle that encloses the object.

Example: `'off'`

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `ErrorBar` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `ErrorBar` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`errorbar`

Topics

"Access Property Values"
"Graphics Object Properties"

errordlg

Create error dialog box

Syntax

```
h = errordlg
h = errordlg(errorstring)
h = errordlg(errorstring,dlgname)
h = errordlg(errorstring,dlgname,createmode)
```

Description

`h = errordlg` creates and displays a dialog box entitled, Error Dialog, that contains the message, "This is the default error." The `errordlg` function returns the handle of the dialog box in `h`.

`h = errordlg(errorstring)` displays a dialog box entitled, Error Dialog, that contains the message, `errorstring`.

`h = errordlg(errorstring,dlgname)` displays a dialog box entitled, `dlgname`, that contains the message, `errorstring`.

`h = errordlg(errorstring,dlgname,`*`createmode`*`)` specifies whether the error dialog box is modal or nonmodal. Optionally, it can also specify an interpreter for `errorstring` and `dlgname`. The `createmode` argument can be a character vector or a structure.

If *`createmode`* is a character vector, it must be one of the values shown in the following table.

createmode Value	Description
`'modal'`	Replaces the error dialog box having the specified `Title`, that was last created or clicked on, with a modal error dialog box as specified. All other error dialog boxes

createmode Value	Description
	with the same title are deleted. The dialog box which is replaced can be either modal or nonmodal.
`'nonmodal'` (default)	Creates a new nonmodal error dialog box with the specified parameters. Existing error dialog boxes with the same title are not deleted.
`'replace'`	Replaces the error dialog box having the specified `Title`, that was last created or clicked on, with a nonmodal error dialog box as specified. All other error dialog boxes with the same title are deleted. The dialog box which is replaced can be either modal or nonmodal.

Note: A modal dialog box prevents the user from interacting with other windows before responding. To block MATLAB program execution as well, use the `uiwait` function.

Modal dialogs (created using `errordlg`, `msgbox`, or `warndlg`) replace any existing dialogs created with these functions that also have the same name.

For more information about modal dialog boxes, see `WindowStyle` in Figure Properties.

If `CreateMode` is a structure, it can have fields `WindowStyle` and `Interpreter`. `WindowStyle` must be one of the options shown in the table above. The value of the `Interpreter` field can be `'tex'` or `'none'`. The default value for `Interpreter` is `'none'`.

Examples

This code,

```
errordlg('File not found','File Error');
```

displays this dialog box:

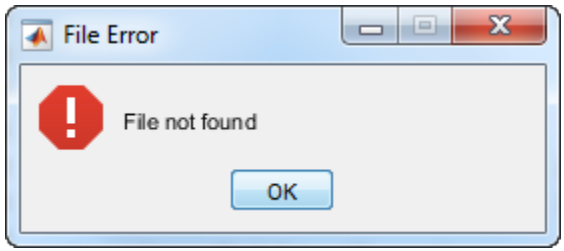

This code,

```
mode = struct('WindowStyle','nonmodal',...
       'Interpreter','tex');
h = errordlg('Try this equation instead: f(x) = x^2',...
    'Equation Error', mode);
```

displays this dialog box:

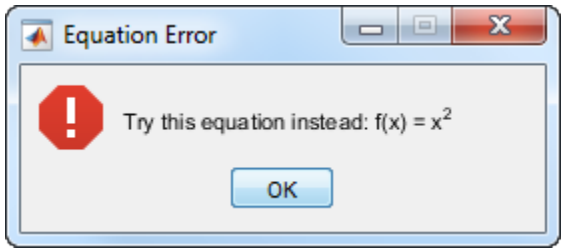

Tips

MATLAB sizes the dialog box to fit the message specified by `errorstring`. The error dialog box has an **OK** push button and remains on the screen until you press the **OK** button or the **Return** key.

The appearance of the dialog box depends on the platform you use.

See Also

`dialog` | `helpdlg` | `inputdlg` | `listdlg` | `msgbox` | `questdlg` | `warndlg` | `figure` | `uiwait` | `uiresume`

Introduced before R2006a

etime

Time elapsed between date vectors

Syntax

```
e = etime(t2,t1)
```

Description

`e = etime(t2,t1)` returns the number of seconds between two date vectors or matrices of date vectors, `t1` and `t2`.

Examples

Compute Elapsed Time

Compute the time elapsed between a specific time and the current time, to 0.01-second accuracy.

Define the initial date and time and convert to date vector form.

```
format shortg
str = 'March 28, 2012 11:51:00';
t1 = datevec(str,'mmmm dd, yyyy HH:MM:SS')
```

```
t1 =
        2012           3          28          11          51           0
```

Determine the current date and time.

```
t2 = clock
```

```
t2 =
        2017           2          24          12          54      27.087
```

The `clock` function returns the current date and time as a date vector.

Use `etime` to compute the number of seconds between `t1` and `t2`.

```
e = etime(t2,t1)
```

```
e =
   1.5501e+08
```

Input Arguments

`t2,t1` — Date vectors
1-by-6 vector | `m`-by-6 matrix

Date vectors, specified as 1-by-6 vectors or `m`-by-6 matrices containing `m` full date vectors in the format:`[Year Month Day Hour Minute Second]`.

Example: `[2012 03 27 11 50 01]`

Data Types: `double`

Tips

- To time the duration of an event, use the `timeit` or `tic` and `toc` functions instead of `clock` and `etime`. The `clock` function is based on the system time, which can be adjusted periodically by the operating system, and thus might not be reliable in time comparison operations.

Algorithms

`etime` does not account for the following:

- Leap seconds.
- Daylight savings time adjustments.
- Differences in time zones.

See Also

See Also

`clock` | `cputime` | `now` | `tic` | `timeit` | `toc`

Introduced before R2006a

etree

Elimination tree

Syntax

```
p = etree(A)
p = etree(A,'col')
p = etree(A,'sym')
[p,q] = etree(...)
```

Description

`p = etree(A)` returns an elimination tree for the square symmetric matrix whose upper triangle is that of `A`. `p(j)` is the parent of column `j` in the tree, or `0` if `j` is a root.

`p = etree(A,'col')` returns the elimination tree of `A'*A`.

`p = etree(A,'sym')` is the same as `p = etree(A)`.

`[p,q] = etree(...)` also returns a postorder permutation `q` of the tree.

See Also

`treelayout` | `treeplot` | `etreeplot`

Introduced before R2006a

etreeplot

Plot elimination tree

Syntax

```
etreeplot(A)
etreeplot(A,nodeSpec,edgeSpec)
```

Description

`etreeplot(A)` plots the elimination tree of `A` (or `A+A'`, if non-symmetric).

`etreeplot(A,nodeSpec,edgeSpec)` allows optional parameters `nodeSpec` and `edgeSpec` to set the node or edge color, marker, and linestyle. Use `''` to omit one or both.

See Also

`etree` | `treeplot` | `treelayout`

Introduced before R2006a

eval

Execute MATLAB expression in text

Syntax

```
eval(expression)
[output1,...,outputN] = eval(expression)
```

Description

`eval(expression)` evaluates the MATLAB code represented by `expression`. If you use `eval` within an anonymous function, nested function, or function that contains a nested function, the evaluated `expression` cannot create a variable.

`[output1,...,outputN] = eval(expression)` stores output from `expression` in the specified variables.

Input Arguments

`expression`

Character vector or string scalar that contains a valid MATLAB expression.

To include a numeric value in the expression, convert it to a character vector or string scalar.

Output Arguments

`output1,...,outputN`

Outputs from the evaluated `expression`.

Examples

Variable Name Evaluation

Select a matrix to plot at runtime.

This example requires that you have a matrix in the current workspace. For example:

```
aMatrix = magic(5);
```

Interactively request the name of a matrix to plot, and call `eval` to use its value.

```
expression = input('Enter the name of a matrix: ','s');
if (exist(expression,'var'))
    mesh(eval(expression))
end
```

If you type `aMatrix` at the input prompt, this code creates a mesh plot of `magic(5)`.

Tips

- Many common uses of the `eval` function are less efficient and are more difficult to read and debug than other MATLAB functions and language constructs. For more information, see "Alternatives to the eval Function".
- Whenever possible, do not include output arguments within the input to the `eval` function, such as `eval(['output = ',expression])`. The preferred syntax,

  ```
  output = eval(expression)
  ```

  allows the MATLAB parser to perform stricter checks on your code, preventing untrapped errors and other unexpected behavior.

See Also

See Also

`assignin` | `evalc` | `evalin` | `feval` | `try`

Topics

"Alternatives to the eval Function"

"Variables in Nested and Anonymous Functions"

Introduced before R2006a

evalc

Evaluate MATLAB expression with capture

Syntax

```
T = evalc(expression)
[T,output1,...,outputN] = evalc(expression)
```

Description

`T = evalc(expression)` is the same as `eval(expression)` except that anything that would normally be written to the command window, except for error messages, is captured and returned in the character array `T` (lines in `T` are separated by `\n` characters).

`[T,output1,...,outputN] = evalc(expression)` is the same as `[output1,...,outputN] = eval(expression)` except that any output is captured into `T`.

Input Arguments

`expression`

Character vector that contains a valid MATLAB expression.

To include a numeric value in the expression, convert it to a character vector with `int2str`, `num2str`, or `sprintf`.

Output Arguments

`T`

Output normally written to the command window during the evaluation of `expression`, except for error messages, returned in a character array. The lines in `T` are separated by `\n` characters.

`output1,...,outputN`

Outputs from the evaluated `expression`.

Tips

When you are using `evalc`, functions `diary`, `more`, and `input` are disabled.

See Also

`eval` | `evalin` | `assignin` | `more` | `feval` | `diary` | `input`

Introduced before R2006a

evalin

Execute MATLAB expression in specified workspace

Syntax

```
evalin(ws, expression)
[a1, a2, a3, ...] = evalin(ws, expression)
```

Description

`evalin(ws, expression)` executes *`expression`*, a character vector or string scalar containing any valid MATLAB expression using variables in the workspace `ws`. `ws` can have a value of `'base'` or `'caller'` to denote the MATLAB base workspace or the workspace of the caller function.

`[a1, a2, a3, ...] = evalin(ws, expression)` executes *`expression`* and returns the results in the specified output variables. Using the `evalin` output argument list is recommended over including the output arguments in the expression:

```
evalin(ws,'[a1, a2, a3, ...] = function(var)')
```

The above syntax avoids strict checking by the MATLAB parser and can produce untrapped errors and other unexpected behavior.

Examples

This example extracts the value of the variable `var` in the MATLAB base workspace and captures the value in the local variable `v`:

```
v = evalin('base', 'var');
```

Limitation

`evalin` cannot be used recursively to evaluate an expression. For example, a sequence of the form `evalin('caller', 'evalin(''caller'', ''x'')')` doesn't work.

Tips

The MATLAB base workspace is the workspace that is seen from the MATLAB command line (when not in the debugger). The caller workspace is the workspace of the function that called the currently running function. Note that the base and caller workspaces are equivalent in the context of a function that is invoked from the MATLAB command line.

`evalin('caller', expression)` finds only *variables* in the caller's workspace; it does not find *functions* in the caller. For this reason, you cannot use `evalin` to construct a handle to a function that is defined in the caller.

If you use `evalin('caller', expression)` in the MATLAB debugger after having changed your local workspace context with `dbup` or `dbdown`, MATLAB evaluates the expression in the context of the function that is one level up in the stack from your current workspace context.

See Also

See Also

`assignin` | `eval` | `evalc` | `feval` | `try`

Introduced before R2006a

event.DynamicPropertyEvent class

Package: event
Superclasses: event.EventData

Event data for dynamic property events

Description

The `event.DynamicPropertyEvent` class defines the event data passed to listeners of the dynamicprops `PropertyAdded` and `PropertyRemoved` events.

`event.DynamicPropertyEvent` is a subclass of event.EventData. The `event.DynamicPropertyEvent` class is sealed (cannot be subclassed) and its constructor is private.

Properties

`PropertyName` — Name of dynamic property

property name

Name of dynamic property that is added or removed

Attributes:

GetAccess	public
SetAccess	private
GetObservable	true
SetObservable	true

Data Types: `char`

`Source` — Event source

object

Object that is the source of the event

Attributes:

GetAccess	public
SetAccess	private
GetObservable	true
SetObservable	true

EventName — Name of event
PropertyAdded | PropertyRemoved

Name of event triggered on the source object

Attributes:

GetAccess	public
SetAccess	private
GetObservable	true
SetObservable	true

Data Types: char

Events

ObjectBeingDestroyed	Triggered when object is destroyed.

Attributes

Sealed	true
HandleCompatible	true

To learn about attributes of classes, see Class Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

event.EventData

Topics

"Dynamic Property Events"
Class Attributes
Property Attributes

Introduced in R2016a

event.EventData class

Package: event
Superclasses: handle

Base class for event data

Description

The `event.EventData` class is the base class for all data objects passed to listeners. When you trigger an event using the `notify` handle class method, MATLAB assigns values to the properties of an `event.EventData` object and passes that object to the listener callback function (the event handler).

To provide additional information to event listeners, subclass `event.EventData`. For more information on custom event data, see "Define Event-Specific Data".

Note: Subclasses of `event.EventData` must set the class `ConstructOnLoad` attribute to `true`.

Create event.EventData Object

The `notify` handle class method creates an `event.EventData` object whenever this method is called. `event.EventData` accepts no input arguments. Subclasses of `event.EventData` cannot pass arguments to the superclass constructor.

Properties

`Source` — Event source

object

Event source object

Attributes:

`SetAccess`	`private`

GetAccess	public
GetObservable	true
SetObservable	true

EventName — Name of event
object

Event source object

Attributes:

SetAccess	private
GetAccess	public
GetObservable	true
SetObservable	true

Data Types: char

Events

ObjectBeingDestroyed	Triggered when object is destroyed.

Attributes

ConstructOnLoad	true
HandleCompatible	true

To learn about attributes of classes, see Class Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also
event.DynamicPropertyEvent

Topics

"Listener Callback Syntax"
"Define Event-Specific Data"
Class Attributes
Property Attributes

Introduced in R2008a

event.hasListener

Determine if listeners exist for event

Syntax

```
tf = event.hasListener(src,EventName)
```

Description

`tf = event.hasListener(src,EventName)` returns `true` if listeners exist for the specified event on the object `src`. Otherwise, it returns `false`. When `src` is an array, `event.hasListener` returns a logical array the same size as `src`.

The class of `src` must define or inherit the specified event. If `src` is a heterogeneous array, the specified event must exist on the class of the array. `event.hasListener` cannot find listeners for events that are defined by some, but not all objects in the heterogeneous array.

`event.hasListener` respects the value of the `event.listener` object `Enabled` property. If you set the listener `Enabled` property to `false`, `event.hasListener` returns `false` for that listener.

Examples

Determine If There Are Listeners

Determine if there are there listeners for `MyEvent` on object `src`:

```
tf = event.hasListener(src,'MyEvent');
```

If `tf` is `true`, then one or more listeners are attached to `src` for event `MyEvent`.

Input Arguments

`src` — Event source
object array

Event source, specified as a scalar or array of objects. The event source is the object to which the listener is attached.

`EventName` — Event name
`char` array

Event name, specified as a `char` array.

Output Arguments

`tf` — `true` if listeners exist
`logical` array

`true` if listeners exist for the specified event on the specified objects. `false` if listeners do not exist.

Data Types: `logical`

Limitations

- `event.hasListener` must have `NotifyAccess` for the event in question.
- `event.hasListener` does not work with the predefined property events, `PreSet`, `PostSet`, `PreGet`, `PostGet`.
- `event.hasListener` does not work with the predefined dynamic property events `PropertyAdded` and `PropertyRemoved`.
- Use `event.hasListener` only with user-defined events.

See Also

See Also
`addlistener` | `notify`

Topics
"Determine If Event Has Listeners"
"Event Attributes"

Introduced in R2016a

event.listener

Class defining listener objects

Syntax

```
lh = event.listener(Hobj,'EventName',@CallbackFunction)
```

Description

The `event.listener` class defines listener objects. Listener objects respond to the specified event and identify the callback function to invoke when the event is triggered.

`lh = event.listener(Hobj,'EventName',@CallbackFunction)` creates an `event.listener` object, `lh`, for the event named in *`EventName`*, on the specified object, `Hobj`.

If `Hobj` is an array of object handles, the listener responds to the named event on any of the objects referenced in the array.

The listener callback function must accept at least two input arguments. For example,

```
function CallbackFunction(source,eventData)
   ...
end
```

where `source` is the object that is the source of the event and `eventData` is an `event.EventData` object.

The `event.listener` class is a handle class. The `event.listener` and the `event.proplistener` classes are part of the same heterogeneous hierarchy. Therefore, you can create arrays that contain objects of both classes. The class of an array containing both classes of objects is `event.listener`.

Limiting Listener Lifecycle

You can create listener object using the `event.listener` class constructor or using `addlistener`.

When you create a listener using `addlistener`, the event source object holds a reference to the listener. When the source is destroyed, MATLAB also destroys the listener. You do not need to store a reference to the listener object to manage its lifecycle.

When you create a listener using `event.listener`, the listener's lifecycle is not coupled to the event source. Because the event source object does not hold a reference to the listener, you have more control over the listener lifecycle. However, if the listener object goes out of scope, the listener no longer exists.

For more information on listener lifecycle, see “Listener Lifecycle”.

Removing a Listener

If you call `delete(lh)` on the listener object, the listener ceases to exist, which means the event no longer causes the listener callback function to execute.

Disabling a Listener

You can enable or disable a listener by setting the value of the listener's `Enabled` property (see Properties table below).

More Information on Events and Listeners

See “Events” for more information and examples of how to use events and listeners.

Properties

Property	Purpose
`Source`	Cell array of source objects
`EventName`	Name of the event
`Callback`	Function to execute when the event is triggered and the `Enabled` property is set to `true`
`Enabled`	The callback executes when the event occurs if and only if `Enabled` is set to `true` (the default).

Property	Purpose
`Recursive`	When `false` (the default), this listener does not execute recursively. Therefore, if the callback triggers its own event, the listener does not execute again. When `true`, the listener callback can cause the same event that triggered the callback. This scheme can lead to infinite recursion, which ends when the MATLAB recursion limit eventually triggers an error.

See Also

`delete` | `addlistener` | `event.proplistener`

Introduced in R2008a

event.PropertyEvent

Data for property events

Description

The `event.PropertyEvent` class defines the data objects passed to listeners of the `meta.property` events:

- `PreGet`
- `PostGet`
- `PreSet`
- `PostSet`

`event.PropertyEvent` is a sealed subclass of `event.EventData` (i.e., you cannot subclass `event.PropertyEvent`).

Properties

`event.PropertyEvent` inherits the first two properties from the event.EventData, and defines one new property:

- `EventName` — One of the four event names listed in the Description section
- `Source` — `meta.property` object that triggers the event
- `AffectedObject` — The object whose property is affected.

See Also

`meta.property` | event.EventData

Topics

"Listen for Changes to Property Values"

event.proplistener

Define listener object for property events

Syntax

```
lh =
event.proplistener(Hobj,Properties,'PropEvent',@CallbackFunction)
```

Description

`lh = event.proplistener(Hobj,Properties,'PropEvent',@CallbackFunction)` creates a property listener object for one or more properties on the specified object.

- `Hobj` — handle of object whose property or properties are to be listened to. If `Hobj` is an array, the listener responds to the named event on all objects in the array.
- `Properties` — an object array or a cell array of `meta.property` object handles representing the properties to which you want to listen.
- `PropEvent` — must be one of the strings: `PreSet`, `PostSet`, `PreGet`, `PostGet`
- `@CallbackFunction` — function handle to the callback function that executes when the event occurs.

The `event.proplistener` class defines property event listener objects. It is a subclass of the `event.listener` class and adds one property to those defined by `event.listener`:

- `Object` — Cell array of objects whose property events are being listened to.

You can call the `event.proplistener` constructor instead of calling `addlistener` to create a property listener. However, when you do not use `addlistener`, the listener's lifecycle is not tied to the object(s) being listened to.

The `event.proplistener` class is a handle class. The `event.proplistener` and the `event.listener` classes are part of the same heterogeneous hierarchy. Therefore, you can create arrays that contain objects of both classes. The class of an array containing both classes of objects is `event.listener`.

See “Listen for Changes to Property Values”.

See “Get Information About Properties” for more information on using `meta.property` objects.

See Also

`event.listener` | `addlistener`

Introduced in R2008a

eventlisteners

List event handler functions associated with COM object events

Syntax

```
info = eventlisteners(h)
```

Description

`info = eventlisteners(h)` lists the events and their event handler routines registered with COM object `h`. The function returns a cell array of character vectors `info`, with each row containing the name of a registered event and the handler routine for that event. If the object has no registered events, `eventlisteners` returns an empty cell array. You can register events either when you create the control, using `actxcontrol`, or at any time afterward, using `registerevent`.

COM functions are available on Microsoft Windows systems only.

Examples

This example manages events for the MATLAB control, `mwsamp`.

```
f = figure('position',[100 200 200 200]);
% Create an mwsamp control and
% register the Click event
h = actxcontrol('mwsamp.mwsampctrl.2',...
    [0 0 200 200],f,{'Click' 'myclick'});
eventlisteners(h)
```

```
ans =
    'Click'    'myclick'
```

MATLAB displays the event name and its event handler, `myclick`.

Register two more events, `DblClick` and `MouseDown`:

```
registerevent(h,{'DblClick', 'my2click'; 'MouseDown' 'mymoused'})
```

```
eventlisteners(h)
```

```
ans =
    'Click'        'myclick'
    'Dblclick'     'my2click'
    'Mousedown'    'mymoused'
```

MATLAB displays all event names and handlers.

Unregister all events for the control:

```
unregisterallevents(h)
eventlisteners(h)
```

```
ans =
     {}
```

MATLAB displays an empty cell array, indicating the control has no registered events.

See Also

events (COM) | registerevent | unregisterevent | unregisterallevents | isevent | actxcontrol

Topics

Introduced before R2006a

events

Event names

Syntax

```
events('classname')
events(obj)
e = events(...)
```

Description

`events('classname')` displays the names of the public events for the MATLAB class *`classname`*, including events inherited from superclasses.

`events(obj)` `obj` is a scalar or array of objects of a MATLAB class.

`e = events(...)` returns the event names in a cell array of strings.

An event is public when the value of its `ListenAccess` attribute is `public` and its `Hidden` attribute value is `false` (default values for both attributes). See "Event Attributes" for a complete list of attributes.

`events` is also a MATLAB class-definition keyword. See `classdef` for more information on class definition keywords.

Examples

Get the names of the public events for the `handle` class:

```
events('handle')
Events for class handle:

    ObjectBeingDestroyed
```

Tutorials

- "Events"

See Also

`properties` | `methods`

Topics

"Events"

Introduced before R2006a

events (COM)

List of events COM object can trigger

Syntax

```
S = events(h)
```

Description

`S = events(h)` returns structure array, `S`, containing all events, both registered and unregistered, known to the COM object, and the function prototype used when calling the event handler routine. For each array element, the structure field is the event name and the contents of that field is the function prototype for that event's handler.

COM functions are available on Microsoft Windows systems only.

Examples

List Control Events Example

Create an `mwsamp` control and list all events.

```
f = figure('position',[100 200 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],f);
events(h)
```

```
Click = void Click()
DblClick = void DblClick()
MouseDown = void MouseDown(int16 Button, int16 Shift,
  Variant x, Variant y)
Event_Args = void Event_Args(int16 typeshort, int32 typelong,
  double typedouble, string typestring, bool typebool)
```

Assign the output to a variable and get one field of the returned structure:

```
ev = events(h);
```

```
ev.MouseDown
```

```
ans =
  void MouseDown(int16 Button, int16 Shift, Variant x, Variant y)
```

List Workbook Events Example

Open a Microsoft Excel application and list all events for a `Workbook` object.

```
myApp = actxserver('Excel.Application');
wbs = myApp.Workbooks;
wb = Add(wbs);
events(wb)
```

The MATLAB software displays all events supported by the `Workbook` object.

See Also

`isevent` | `eventlisteners` | `registerevent` | `unregisterevent` | `unregisterallevents`

exceltime

Convert MATLAB datetime to Excel date number

Syntax

```
e = exceltime(t)
e = exceltime(t,dateType)
```

Description

`e = exceltime(t)` returns a `double` array containing Excel serial date numbers equivalent to the datetime values in `t`. Excel serial date numbers are the number of days and fractional days since 0-January-1900 00:00:00, and do not take into account time zone and leap seconds.

`e = exceltime(t,dateType)` returns the type of Excel serial date numbers specified by `dateType`. For example, you can convert datetime values to the number of days since 1-January-1904 00:00:00.

Examples

Convert Datetime Array to Excel Date Numbers

Create a `datetime` array. Then, convert the dates to the equivalent Excel® serial date numbers.

```
t = datetime('now') + calmonths(1:3)
```

```
t = 1×3 datetime array
   24-Mar-2017 12:56:18   24-Apr-2017 12:56:18   24-May-2017 12:56:18
```

```
e = exceltime(t)
```

```
e =
```

```
1.0e+04 *

 4.2819    4.2850    4.2880
```

Input Arguments

t — Input date and time

datetime array

Input date and time, specified as a datetime array.

dateType — Type of Excel serial date numbers

'1900' (default) | '1904'

Type of Excel serial date numbers, specified as either '1900' or '1904'.

- If dateType is '1900', then exceltime converts the datetime values in t to the equivalent the number of days and fractional days since 0-January-1900 00:00:00.
- If dateType is '1904', then exceltime converts the datetime values in t to the equivalent the number of days and fractional days since 1-January-1904 00:00:00.

exceltime does not account for time zone.

Output Arguments

e — Excel serial date numbers

scalar | vector | matrix | multidimensional array

Excel serial date numbers, returned as a scalar, vector, matrix, or multidimensional array of type double. Excel serial date numbers are not defined prior to their epoch (0-January-1900 or 1-January-1904). Excel serial date numbers treat 1900 as a leap year. Therefore, dates after February 28, 1900 are offset by one day relative to MATLAB serial date numbers, and there is a discontinuity of one day between February 28, 1900 and March 1, 1900.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`datenum` | `datetime` | `juliandate` | `posixtime` | `yyyymmdd`

Introduced in R2014b

Execute

Execute MATLAB command in Automation server

Syntax

IDL Method Signature

```
BSTR Execute([in] BSTR command)
```

Microsoft Visual Basic Client

```
Execute(command As String) As String
```

MATLAB Client

```
result = Execute(h,'command')
```

Description

The `Execute` function executes the MATLAB statement specified by `command` in the MATLAB Automation server attached to handle `h`.

The server returns output from the command in `result`. `result` also contains any MATLAB warning or error messages.

If you terminate the MATLAB command with a semicolon and there are no warnings or error messages, `result` might be empty.

COM functions are available on Microsoft Windows systems only.

Visual Basic .NET Examples

Create a 6-by-6 matrix in the MATLAB server, remove rows 4–6, and return the results to the client.

```
Dim Matlab As Object
Dim server_version As String
Matlab = CreateObject("matlab.application")
MatLab.PutWorkspaceData("A","base",rand(6))
Matlab.Execute("A(4:6,:) = [];")
Matlab.GetWorkspaceData("A","base",B)
```

Tips

If you want to display output from `Execute` in the client window, specify an output variable, `result`.

If there is an error, the `Execute` function returns the MATLAB error message with the characters `???` prepended to the text.

See Also

`Feval` | `GetFullMatrix` | `PutFullMatrix`

Introduced before R2006a

exist

Check existence of variable, script, function, folder, or class

Syntax

```
exist name
exist name searchType
A = exist( ___ )
```

Description

`exist name` returns the type of `name` as a number. This list describes the type associated with each value:

- 0 — `name` does not exist.
- 1 — `name` is a variable in the workspace.
- 2 — `name` is a file with extension `.m`, `.mlx`, or `.mlapp`, or `name` is the name of a file with a non-registered file extension (`.mat`, `.fig`, `.txt`).
- 3 — `name` is a MEX-file on your MATLAB search path.
- 4 — `name` is a Simulink model or library file on your MATLAB search path.
- 5 — `name` is a built-in MATLAB function. This does not include classes.
- 6 — `name` is a P-code file on your MATLAB search path.
- 7 — `name` is a folder.
- 8 — `name` is a class. (`exist` returns 0 for Java classes if you start MATLAB with the `-nojvm` option.)

MATLAB searches starting at the top of the search path, and moving down until a result is found or the last folder on the path is reached. If more than one `name` exists in a folder, MATLAB displays the first instance of `name`, according to the "Function Precedence Order". Folders are an exception to the function precedence rules. They have precedence over all types except for variables.

For example, if `name` matches both a file with a `.m` extension and a P-code file, then `exist` returns 6, identifying it as a P-code file. If `name` matches both a variable and a P-

code file, exists returns 1, identifying it as a variable. If `name` matches both a folder and a MATLAB function, `exist` returns `7`, identifying it as a folder.

`exist name searchType` returns the type of `name`, restricting results to the specified type, `searchType`. If `name` of type `searchType` does not exist, MATLAB returns `0`.

`A = exist( ___ )` returns the type of `name` to `A`.

Examples

Check Existence of Workspace Variable

Create a variable named `testresults`, and then confirm its existence in the workspace.

```
testresults = magic(5);
exist testresults
```

```
ans = 1
```

A variable named `testresults` exists in the workspace.

Check Existence of Folder

Create the folder `myfolder`, and then check its existence as a folder.

```
mkdir myfolder;
exist myfolder dir
```

```
ans = 7
```

If you specify the type as `file`, MATLAB® searches for both files and folders, therefore returning the same result.

```
exist myfolder file
```

```
ans = 7
```

Check if MATLAB Function is Built-In Function

Check whether the `plot` function is a built-in function or a file.

```
A = exist('plot')
```

```
A = 5
```

This indicates that `plot` is a built-in MATLAB function.

Input Arguments

`name` — name of variable, script, function, folder, or class

character vector | string

Name of variable, script, function, folder, or class, specified as a character vector or string. `name` can include a partial path, but must be in a folder directly on the search path (subfolders are not searched), or in the current folder. Otherwise, `name` must include a full path.

If `name` specifies a file with a non-registered file extension (`.mat`, `.fig`, `.txt`), include the extension. You can also include an extension to prevent conflict with other similar file names. For example, `exist file.txt` or `exist("file.txt")`.

On Windows systems, `name` is not case sensitive. On UNIX systems, `name` is case sensitive for files with a non-registered file extension (`.mat`, `.fig`, `.txt`). For files with a registered file extension, `name` is not case sensitive, but preference is given to results with an exact case match.

Note: MATLAB does not examine the contents or internal structure of a file and relies solely on the file extension for classification.

`searchType` — Type of results to search for

`builtin` | `class` | `dir` | `file` | `var`

Type of results to search for, specified as one of these values:

searchType	Description	Possible Return Values
`builtin`	Checks only for built-in functions.	5, 0
`class`	Checks only for classes.	8, 0
`dir`	Checks only for folders.	7, 0
`file`	Checks only for files or folders.	2, 3, 4, 6, 7, 0

searchType	Description	Possible Return Values
`var`	Checks only for variables.	1, 0

See Also

See Also

`dir` | `inmem` | `isempty` | `isfield` | `ismember` | `what` | `which` | `who`

Topics

"Function Precedence Order"
"What Is the MATLAB Search Path?"

Introduced before R2006a

exit

Terminate MATLAB program (same as `quit`)

Syntax

```
exit
exit(code)
```

Description

`exit` terminates the current session of MATLAB after running `finish.m`, if the file `finish.m` exists. It performs the same as `quit` and takes the same termination options, such as **`force`**. Call `exit` from the MATLAB command prompt. To interrupt a MATLAB command, see "Stop Execution".

`exit(code)` returns exit code when calling a MATLAB command from the system command line.

Alternatives

As an alternative to the `exit` function, click the Close box in the MATLAB desktop.

See Also

`quit` | `finish`

Topics

"Stop Execution"

Introduced before R2006a

exp

Exponential

Syntax

```
Y = exp(X)
```

Description

`Y = exp(X)` returns the exponential e^x for each element in array `X`. For complex elements $z = x + iy$, it returns the complex exponential

$$e^z = e^x (\cos y + i \sin y).$$

Use `expm` to compute a matrix exponential.

Examples

Numeric Representation of e

Calculate the exponential of 1, which is Euler's number, *e*.

```
exp(1)
```

```
ans = 2.7183
```

Euler's Identity

Euler's identity is the equality $e^{i\pi} + 1 = 0$.

Compute the value of $e^{i\pi}$.

```
Y = exp(1i*pi)
```

```
Y =
  -1.0000 + 0.0000i
```

Plot Exponential Function

Plot $y = e^{x/2}$ for x values in the range $[-2, 10]$.

```
X = -2:0.5:10;
Y = exp(X/2);
plot(X,Y)
```

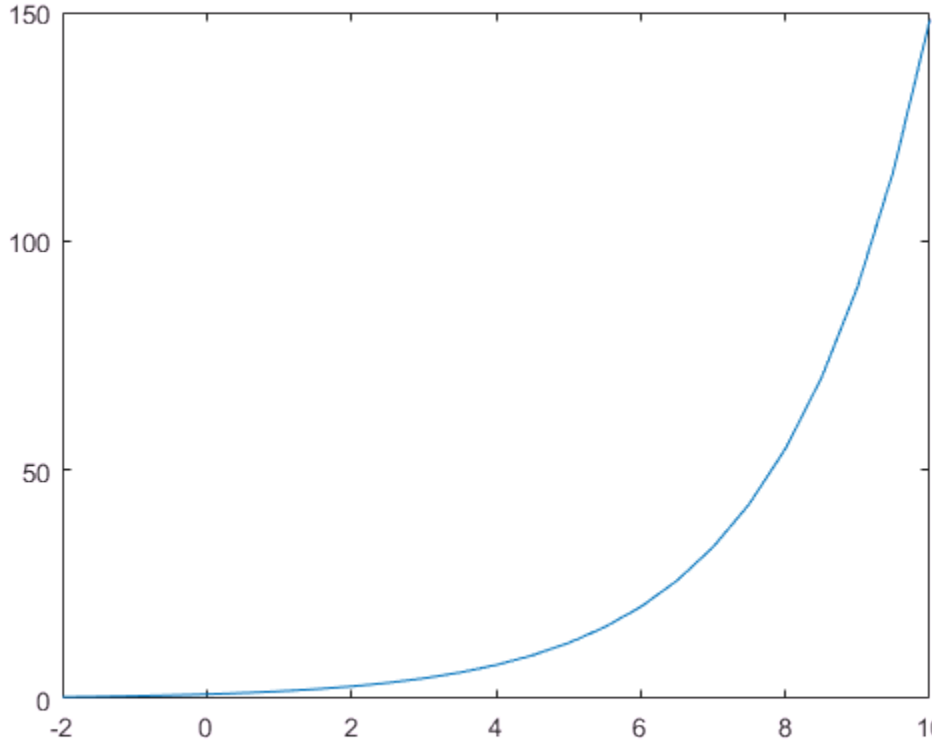

Input Arguments

X — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Exponential values

scalar | vector | matrix | multidimensional array

Exponential values, returned as a scalar, vector, matrix, or multidimensional array.

For real values of `X` in the interval (`-Inf`, `Inf`), `Y` is in the interval (`0`,`Inf`). For complex values of `X`, `Y` is complex. The data type of `Y` is the same as that of `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`expint` | `expm` | `expm1` | `log` | `log10` | `mpower` | `power`

Introduced before R2006a

expint

Exponential integral

Syntax

```
Y = expint(X)
```

Description

`Y = expint(X)` evaluates the exponential integral for each element of `X`.

Definitions

Exponential Integral

The exponential integral computed by this function is defined as

$$E_1(x) = \int_x^{\infty} e^{-t} / t \, dt$$

Another common definition of the exponential integral function is the Cauchy principal value integral

$$\mathrm{Ei}(x) = \int_{-\infty}^{x} e^{t} / t \, dt$$

which, for real positive x, is related to `expint` as

$$E_1(-x) = -\mathrm{Ei}(x) - i\pi$$

References

[1] Abramowitz, M. and I. A. Stegun. *Handbook of Mathematical Functions*. Chapter 5, New York: Dover Publications, 1965.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Introduced before R2006a

expm

Matrix exponential

Syntax

```
Y = expm(X)
```

Description

`Y = expm(X)` computes the matrix exponential of `X`. Although it is not computed this way, if `X` has a full set of eigenvectors `V` with corresponding eigenvalues `D`, then `[V,D] = eig(X)` and

```
expm(X) = V*diag(exp(diag(D)))/V
```

Use `exp` for the element-by-element exponential.

Examples

Compare Exponentials

Compute and compare the exponential of `A` with the *matrix* exponential of `A`.

```
A = [1 1 0; 0 0 2; 0 0 -1];
exp(A)
```

```
ans =

    2.7183    2.7183    1.0000
    1.0000    1.0000    7.3891
    1.0000    1.0000    0.3679
```

```
expm(A)
```

```
ans =

    2.7183    1.7183    1.0862
```

```
         0    1.0000    1.2642
         0         0    0.3679
```

Notice that the diagonal elements of the two results are equal, which is true for any triangular matrix. The off-diagonal elements, including those below the diagonal, are different.

Input Arguments

X — Input matrix

square matrix

Input matrix, specified as a square matrix.

Data Types: `single` | `double`
Complex Number Support: Yes

Algorithms

The algorithm `expm` uses is described in [1] and [2].

Note The files, expmdemo1.m, expmdemo2.m, and expmdemo3.m illustrate the use of Padé approximation, Taylor series approximation, and eigenvalues and eigenvectors, respectively, to compute the matrix exponential. References [3] and [4] describe and compare many algorithms for computing a matrix exponential.

References

[1] Higham, N. J., "The Scaling and Squaring Method for the Matrix Exponential Revisited," *SIAM J. Matrix Anal. Appl.*, 26(4) (2005), pp. 1179–1193.

[2] Al-Mohy, A. H. and N. J. Higham, "A new scaling and squaring algorithm for the matrix exponential," *SIAM J. Matrix Anal. Appl.*, 31(3) (2009), pp. 970–989.

[3] Golub, G. H. and C. F. Van Loan, *Matrix Computation*, p. 384, Johns Hopkins University Press, 1983.

[4] Moler, C. B. and C. F. Van Loan, "Nineteen Dubious Ways to Compute the Exponential of a Matrix," *SIAM Review 20*, 1978, pp. 801–836. Reprinted and updated as "Nineteen Dubious Ways to Compute the Exponential of a Matrix, Twenty-Five Years Later," *SIAM Review 45*, 2003, pp. 3–49.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`eig` | `exp` | `expm1` | `funm` | `logm` | `sqrtm`

Introduced before R2006a

expm1

Compute exp(x)-1 accurately for small values of x

Syntax

```
y = expm1(x)
```

Description

`y = expm1(x)` computes `exp(x)-1`, compensating for the roundoff in `exp(x)`.

For small `x`, `expm1(x)` is approximately `x`, whereas `exp(x)-1` can be zero.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`exp` | `expm` | `log1p`

Introduced before R2006a

export2wsdlg

Create dialog box for exporting variables to workspace

Syntax

```
export2wsdlg(cklabels,defaultvars,xitems)
export2wsdlg(cklabels,defaultvars,xitems,title)
export2wsdlg(cklabels,defaultvars,xitems,title,selected)
export2wsdlg(cklabels,defaultvars,xitems,title,selected,helpfunction)
export2wsdlg(cklabels,defaultvars,xitems,title,selected,helpfunction,functionl
hdialog = export2wsdlg(...)
[hdialog,ok_pressed] = export2wsdlg(...)
```

Description

`export2wsdlg(cklabels,defaultvars,xitems)` creates a dialog box with a series of check boxes and edit fields. `cklabels` is a cell array of labels for the check boxes. `defaultvars` is a cell array of default variable names that appear in the edit fields. `xitems` is a cell array of the values to be stored in the variables. If there is only one item to export, `export2wsdlg` creates a text control instead of a check box.

Note: By default, the dialog box is modal. A modal dialog box prevents the user from interacting with other windows before responding.

`export2wsdlg(cklabels,defaultvars,xitems,title)` creates the dialog with `title` as its title.

`export2wsdlg(cklabels,defaultvars,xitems,title,selected)` creates the dialog allowing the user to control which check boxes are checked. `selected` is a logical array whose length is the same as `cklabels`. True indicates that the check box should initially be checked, false unchecked.

`export2wsdlg(cklabels,defaultvars,xitems,title,selected,helpfunction)` creates the dialog with a help button. `helpfunction` is a callback that displays help.

`export2wsdlg(cklabels,defaultvars,xitems,title,selected,helpfunction,functionl` creates a dialog that enables the user to pass in `functionlist`, a cell array of functions and optional arguments that calculate, then return the value to export. `functionlist` should be the same length as `cklabels`.

`hdialog = export2wsdlg(...)` returns the handle of the dialog.

`[hdialog,ok_pressed] = export2wsdlg(...)` sets `ok_pressed` to true if the OK button is pressed, or false otherwise. If two return arguments are requested, `hdialog` is `[]` and the function does not return until the dialog is closed.

The user can edit the text fields to modify the default variable names. If the same name appears in multiple edit fields, `export2wsdlg` creates a structure using that name. It then uses the `defaultvars` as field names for that structure.

The lengths of `cklabels`, `defaultvars`, `xitems` and `selected` must all be equal.

The variable names in `defaultvars` must be unique.

Examples

This example creates a dialog box that enables the user to save the variables `sumA` and/or `meanA` to the workspace. The dialog box title is Save Sums to Workspace.

```
A = randn(10,1);
checkLabels = {'Save sum of A to variable named:' ...
               'Save mean of A to variable named:'};
varNames = {'sumA','meanA'};
items = {sum(A),mean(A)};
export2wsdlg(checkLabels,varNames,items,...
             'Save Sums to Workspace');
```

exportsetupdlg

Open figure Export Setup dialog box

Syntax

```
exportsetupdlg(f)
exportsetupdlg
```

Description

`exportsetupdlg(f)` displays the export settings dialog box. MATLAB applies your selections to the figure, `f`.

`exportsetupdlg` applies your selections to the current figure. If no figure exists, MATLAB creates a new figure.

Examples

Export Setting for a Figure

Create a figure and display the Export Setup dialog.

```
f = figure;
exportsetupdlg(f);
```

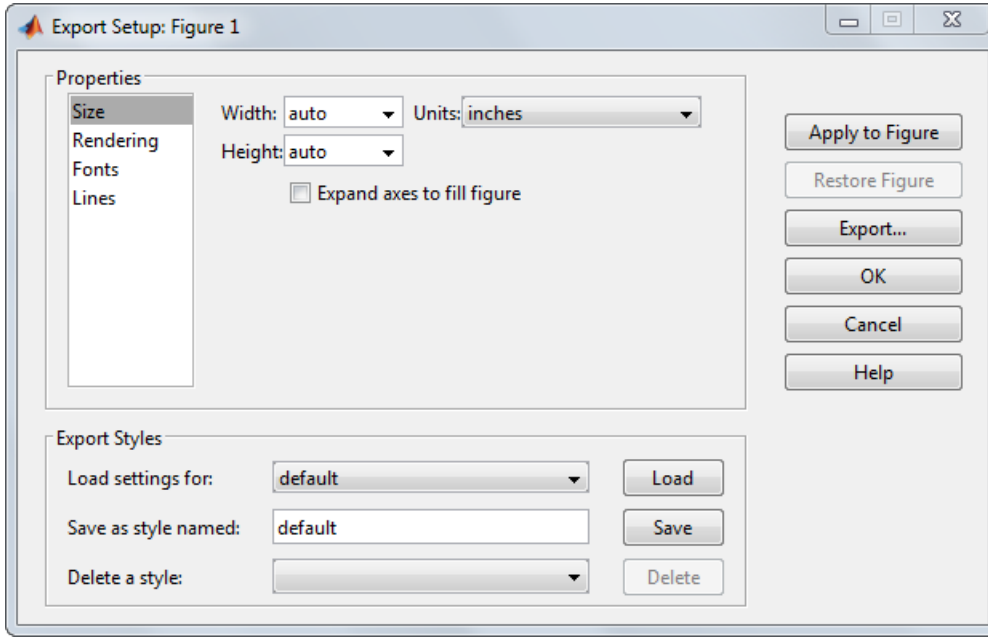

Input Arguments

`f` — Target figure

figure object

Target figure, specified as a figure object.

See Also

See Also

`printdlg` | `printpreview`

Topics

"Customize Figure Interactively Before Saving"

Introduced in R2006b

extractAfter

Extract substring after specified position

Syntax

```
newStr = extractAfter(str,startStr)
newStr = extractAfter(str,startPos)
```

Description

`newStr = extractAfter(str,startStr)` extracts the substring that begins after `startStr` and ends with the last character of `str`. If `startStr` occurs multiple times in `str`, then `newStr` is `str` from the first occurrence of `startStr` to the end.

If `str` is a string array or a cell array of character vectors, then `extractAfter` extracts substrings from each element of `str`. The output argument `newStr` has the same data type as `str`.

`newStr = extractAfter(str,startPos)` extracts the substring that begins after the position specified by `startPos` and ends with the last character of `str`.

Examples

Select Text After Substring

Create string arrays and select text that occurs after substrings.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "The quick brown fox"
```

```
str =
"The quick brown fox"
```

Extract the substring that occurs after the substring `"quick "`. The `extractAfter` function selects the new text but does not include `"quick "` in the output.

```
newStr = extractAfter(str,"quick ")
```

```
newStr =
"brown fox"
```

Create a new string array from the elements of a string array. When you specify different substrings as positions, they must be contained in a string array or a cell array that is the same size as the input string array.

```
str = ["The quick brown fox jumps";"over the lazy dog"]
```

```
str = 2×1 string array
    "The quick brown fox jumps"
    "over the lazy dog"
```

```
newStr = extractAfter(str,["quick ";"the "])
```

```
newStr = 2×1 string array
    "brown fox jumps"
    "lazy dog"
```

You also can specify one substring as a position that is applied to all elements of the input string array.

Select Substrings After Position

Create strings after specified positions.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "Edgar Allen Poe"
```

```
str =
"Edgar Allen Poe"
```

Select the substring after the 12th character.

```
newStr = extractAfter(str,12)
```

```
newStr =
"Poe"
```

Select substrings from each element of a string array. When you specify different positions with numeric arrays, they must be the same size as the input string array.

```
str = ["Edgar Allen Poe";"Louisa May Alcott"]
```

```
str = 2×1 string array
    "Edgar Allen Poe"
    "Louisa May Alcott"
```

```
newStr = extractAfter(str,[12;11])
```

```
newStr = 2×1 string array
    "Poe"
    "Alcott"
```

Select substrings from each element and specify the same position.

```
newStr = extractAfter(str,6)
```

```
newStr = 2×1 string array
    "Allen Poe"
    " May Alcott"
```

Select Text After Position in Character Vector

Create a character vector. Then create new character vectors that are substrings of `chr`.

```
chr = 'peppers and onions'
```

```
chr =
'peppers and onions'
```

Select text after the 12th position.

```
newChr = extractAfter(chr,12)
```

```
newChr =
'onions'
```

Select text after a substring.

```
newChr = extractAfter(chr,'and ')
```

```
newChr =
'onions'
```

- "Create String Arrays"
- "Search and Replace Text"
- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`startStr` — String that indicates start of substring to extract

string array | character vector | cell array of character vectors

String that indicates the start of the substring to extract, specified as a string array, a character vector, or a cell array of character vectors. `extractAfter` excludes `startStr` from the substring to extract.

If `str` is a string array or cell array of character vectors, then `startStr` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Data Types: `string` | `char` | `cell`

`startPos` — Start position of substring to extract

numeric array

Start position of substring to extract, specified as a numeric array. `extractAfter` excludes the character at `start` from the substring to extract.

If `str` is a string array or cell array of character vectors, then `startPos` can be a numeric scalar or a numeric array of the same size as `str`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

newStr — Output text
string array | character vector | cell array of character vectors

Output text, returned as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

See Also

See Also
`count` | `erase` | `eraseBetween` | `extractBefore` | `extractBetween` | `insertAfter` | `insertBefore` | `join` | `replace` | `replaceBetween` | `size` | `split` | `strlength`

Topics
"Create String Arrays"
"Search and Replace Text"
"Test for Empty Strings and Missing Values"

Introduced in R2016b

extractBefore

Extract substring before specified position

Syntax

```
newStr = extractBefore(str,endStr)
newStr = extractBefore(str,endPos)
```

Description

`newStr = extractBefore(str,endStr)` extracts the substring that begins with the first character of `str` and ends before `endStr`. If `endStr` occurs multiple times in `str`, then `newStr` is `str` from the start of `str` up to the first occurrence of `endStr`

If `str` is a string array or a cell array of character vectors, then `extractBefore` extracts substrings from each element of `str`. The output argument `newStr` has the same data type as `str`.

`newStr = extractBefore(str,endPos)` extracts the substring that begins with the first character of `str` and ends before the position specified by `endPos`.

Examples

Select Text Before Substring

Create string arrays and select text that occurs before substrings.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "The quick brown fox"
```

```
str = 
"The quick brown fox"
```

Extract the substring that occurs before the substring `" brown"`. The `extractBefore` function selects the text but does not include `" brown"` in the output.

```
newStr = extractBefore(str," brown")
```

```
newStr =
"The quick"
```

Create a new string array from the elements of a string array. When you specify different substrings as positions, they must be contained in a string array or a cell array that is the same size as `str`.

```
str = ["The quick brown fox jumps";"over the lazy dog"]
```

```
str = 2×1 string array
    "The quick brown fox jumps"
    "over the lazy dog"
```

```
newStr = extractBefore(str,[" brown";" dog"])
```

```
newStr = 2×1 string array
    "The quick"
    "over the lazy"
```

You also can specify one substring as a position that is applied to all elements of the input string array.

Select Substrings Before Position

Create strings before specified positions.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "Edgar Allen Poe"
```

```
str =
"Edgar Allen Poe"
```

Select the substring before the sixth character.

```
newStr = extractBefore(str,6)
```

```
newStr =
```

```
"Edgar"
```

Select substrings from each element of a string array. When you specify different positions with numeric arrays, they must be the same size as the input string array.

```
str = ["Edgar Allen Poe";"Louisa May Alcott"]
```

```
str = 2×1 string array
    "Edgar Allen Poe"
    "Louisa May Alcott"
```

```
newStr = extractBefore(str,[6;7])
```

```
newStr = 2×1 string array
    "Edgar"
    "Louisa"
```

Select substrings from each element and specify the same position.

```
newStr = extractBefore(str,12)
```

```
newStr = 2×1 string array
    "Edgar Allen"
    "Louisa May "
```

Select Text Before Position in Character Vector

Create a character vector. Then create new character vectors that are substrings of `chr`.

```
chr = 'peppers and onions'
```

```
chr =
'peppers and onions'
```

Select the substring before the eighth position.

```
newChr = extractBefore(chr,8)
```

```
newChr =
'peppers'
```

Select text before a substring.

```
newChr = extractBefore(chr,' and')
```

```
newChr =
'peppers'
```

- "Create String Arrays"
- "Search and Replace Text"
- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`endStr` — String that indicates end of substring to extract

string array | character vector | cell array of character vectors

String that indicates end of substring to extract, specified as a string array, a character vector, or a cell array of character vectors. `extractBefore` excludes `endStr` from the substring to extract.

If `str` is a string array or cell array of character vectors, then `endStr` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Data Types: `string` | `char` | `cell`

`endPos` — End position of substring to extract

numeric array

End position of substring to extract, specified as a numeric array.

If `str` is a string array or cell array of character vectors, then `endPos` can be a numeric scalar or a numeric array of the same size as `str`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

newStr — Output text
string array | character vector | cell array of character vectors

Output text, returned as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also
`count` | `erase` | `eraseBetween` | `extractAfter` | `extractBetween` | `insertAfter` | `insertBefore` | `join` | `replace` | `replaceBetween` | `size` | `split` | `strlength`

Topics
“Create String Arrays”
“Search and Replace Text”
“Test for Empty Strings and Missing Values”

Introduced in R2016b

extractBetween

Extract substrings between indicators that mark starts and ends of substrings

Syntax

```
newStr = extractBetween(str,startStr,endStr)
newStr = extractBetween(str,startPos,endPos)
newStr = extractBetween( ___ ,'Boundaries',bounds)
```

Description

`newStr = extractBetween(str,startStr,endStr)` extracts the substring from `str` that occurs between the substrings `startStr` and `endStr`. The extracted substring does not include `startStr` and `endStr`.

If `str` is a string array or a cell array of character vectors, then `extractBetween` extracts substrings from each element of `str`. The output argument `newStr` has the same data type as `str`.

`newStr = extractBetween(str,startPos,endPos)` extracts the substring from `str` that occurs between the positions `startPos` and `endPos`, including the characters at those positions. `extractBetween` returns the substring as `newStr`.

`newStr = extractBetween( ___ ,'Boundaries',bounds)` forces the starts and ends specified in any of the previous syntaxes to be either inclusive or exclusive. They are inclusive when `bounds` is `'inclusive'`, and exclusive when `bounds` is `'exclusive'`. For example, `extractBetween(str,startStr,endStr,'Boundaries','inclusive')` returns `startStr`, `endStr`, and all the text between them as `newStr`.

Examples

Select Text Between Substrings

Create string arrays and select text that occurs between substrings.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "The quick brown fox"
```

```
str =
"The quick brown fox"
```

Select the text that occurs between the substrings `"quick "` and `" fox"`. The `extractBetween` function selects the text but does not include `"quick "` or `" fox"` in the output.

```
newStr = extractBetween(str,"quick "," fox")
```

```
newStr =
"brown"
```

Select substrings from each element of a string array. When you specify different substrings as start and end indicators, they must be contained in a string array or a cell array that is the same size as `str`.

```
str = ["The quick brown fox jumps";"over the lazy dog"]
```

```
str = 2×1 string array
    "The quick brown fox jumps"
    "over the lazy dog"
```

```
newStr = extractBetween(str,["quick ";"the "],[" fox";" dog"])
```

```
newStr = 2×1 string array
    "brown"
    "lazy"
```

Select Substrings Between Start and End Positions

Create string arrays and select substrings between start and end positions that are specified as numbers.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "Edgar Allen Poe"
```

```
str =
"Edgar Allen Poe"
```

Select the middle name. Specify the seventh and 11th positions in the string.

```
newStr = extractBetween(str,7,11)
```

```
newStr =
"Allen"
```

Select substrings from each element of a string array. When you specify different start and end positions with numeric arrays, they must be the same size as the input string array.

```
str = ["Edgar Allen Poe";"Louisa May Alcott"]
```

```
str = 2×1 string array
    "Edgar Allen Poe"
    "Louisa May Alcott"
```

```
newStr = extractBetween(str,[7;8],[11;10])
```

```
newStr = 2×1 string array
    "Allen"
    "May"
```

Select Text with Inclusive and Exclusive Boundaries

Select text from string arrays with boundaries that are forced to be inclusive or exclusive. `extractBetween` includes the boundaries with the selected text when the boundaries are inclusive. `extractBetween` does not include the boundaries with the selected text when the boundaries are exclusive.

Create a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str1 = "small|medium|large"
```

```
str1 =
"small|medium|large"
```

Select the text between sixth and 13th positions, but do not include the characters at those positions.

```
newStr = extractBetween(str1,6,13,'Boundaries','exclusive')
```

```
newStr =
"medium"
```

Select the text between two substrings, and also the substrings themselves.

```
str2 = "The quick brown fox jumps over the lazy dog"
```

```
str2 =
"The quick brown fox jumps over the lazy dog"
```

```
newStr = extractBetween(str2," brown","jumps",'Boundaries','inclusive')
```

```
newStr =
" brown fox jumps"
```

Select Text Between Positions in Character Vector

Create a character vector and select text between start and end positions.

```
chr = 'mushrooms, peppers, and onions'
```

```
chr =
'mushrooms, peppers, and onions'
```

```
newChr = extractBetween(chr,12,18)
```

```
newChr = cell
    'peppers'
```

Select text between substrings.

```
newChr = extractBetween(chr,'mushrooms, ',', and')
```

```
newChr = cell
    'peppers'
```

- “Create String Arrays”
- “Search and Replace Text”
- “Test for Empty Strings and Missing Values”

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`startStr` — String that indicates start of substring to extract

string array | character vector | cell array of character vectors

String that indicates the start of the substring to extract, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or cell array of character vectors, then `startStr` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Example: `extractBetween(str,"AB","YZ")` extracts the substrings between `AB` and `YZ` in each element of `str`.

Example: If `str` is a 2-by-1 string array, then `extractBetween(str,["AB";"FG"],["YZ";"ST"])` extracts the substrings between `AB` and `YZ` in `str(1)`, and between `FG` and `ST` in `str(2)`.

Data Types: `string` | `char` | `cell`

`endStr` — String that indicates end of substring to extract

string array | character vector | cell array of character vectors

String that indicates the end of the substring to extract, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or cell array of character vectors, then `endStr` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Example: `extractBetween(str,"AB","YZ")` extracts the substrings between `AB` and `YZ` in each element of `str`.

Example: If `str` is a 2-by-1 string array, then `extractBetween(str,["AB";"FG"],["YZ";"ST"])` extracts the substrings between `AB` and `YZ` in `str(1)`, and between `FG` and `ST` in `str(2)`.

Data Types: `string` | `char` | `cell`

`startPos` — Start position of substring to extract

numeric array

Start position of substring to extract, specified as a numeric array.

If `str` is an array with multiple pieces of text, then `startPos` can be a numeric scalar or a numeric array of the same size as `str`.

Example: `extractBetween(str,5,9)` extracts the substrings from the fifth through the ninth positions in each element of `str`.

Example: If `str` is a 2-by-1 string array, then `extractBetween(str,[5;10],[9;21])` extracts the substring from the fifth through the ninth positions in `str(1)`, and from the 10th through the 21st positions in `str(2)`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`endPos` — End position of substring to extract

numeric array

End position of substring to extract, specified as a numeric array.

If `str` is an array with multiple pieces of text, then `endPos` can be a numeric scalar or a numeric array of the same size as `str`.

Example: `extractBetween(str,5,9)` extract the substrings from the fifth through the ninth positions in each element of `str`.

Example: If `str` is a 2-by-1 string array, then `extractBetween(str,[5;10],[9;21])` extracts the substrings from the fifth through the ninth positions in `str(1)`, and from the 10th through the 21st positions in `str(2)`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`newStr` — Output text

string array | character vector | cell array of character vectors

Output text, returned as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

Expansion in the first dimension is not supported with tall arrays.

For more information, see "Tall Arrays".

See Also

See Also

`count` | `erase` | `eraseBetween` | `extractAfter` | `extractBefore` | `insertAfter` | `insertBefore` | `join` | `replace` | `replaceBetween` | `size` | `split` | `strlength`

Topics

"Create String Arrays"
"Search and Replace Text"
"Test for Empty Strings and Missing Values"

Introduced in R2016b

eye

Identity matrix

Syntax

```
I = eye
I = eye(n)
I = eye(n,m)
I = eye(sz)

I = eye(classname)
I = eye(n,classname)
I = eye(n,m,classname)
I = eye(sz,classname)

I = eye('like',p)
I = eye(n,'like',p)
I = eye(n,m,'like',p)
I = eye(sz,'like',p)
```

Description

`I = eye` returns the scalar, `1`.

`I = eye(n)` returns an `n`-by-`n` identity matrix with ones on the main diagonal and zeros elsewhere.

`I = eye(n,m)` returns an `n`-by-`m` matrix with ones on the main diagonal and zeros elsewhere.

`I = eye(sz)` returns an array with ones on the main diagonal and zeros elsewhere. The size vector, `sz`, defines `size(I)`. For example, `eye([2,3])` returns a 2-by-3 array with ones on the main diagonal and zeros elsewhere.

`I = eye(classname)` returns a scalar, `1`, where `classname` specifies the data type. For example, `eye('int8')` returns a scalar, 8-bit integer.

`I = eye(n,classname)` returns an `n`-by-`n` identity matrix of data type `classname`.

`I = eye(n,m,classname)` returns an `n`-by-`m` matrix of data type `classname` with ones on the main diagonal and zeros elsewhere.

`I = eye(sz,classname)` returns a matrix with ones on the main diagonal and zeros elsewhere. The size vector, `sz`, defines `size(I)` and `classname` defines `class(I)`.

`I = eye('like',p)` returns a scalar, `1`, with the same data type, sparsity, and complexity (real or complex) as the numeric variable, `p`.

`I = eye(n,'like',p)` returns an `n`-by-`n` identity matrix like `p`.

`I = eye(n,m,'like',p)` returns an `n`-by-`m` matrix like `p`.

`I = eye(sz,'like',p)` returns a matrix like `p` where the size vector, `sz`, defines `size(I)`.

Examples

Square Identity Matrix

Create a 4-by-4 identity matrix.

```
I = eye(4)
```

```
I =

     1     0     0     0
     0     1     0     0
     0     0     1     0
     0     0     0     1
```

Rectangular Matrix

Create a 2-by-3 identity matrix.

```
I = eye(2,3)
```

```
I =
```

```
     1     0     0
     0     1     0
```

Identity Vector

Create a 3-by-1 identity vector.

```
sz = [3,1];
I = eye(sz)
```

```
I =

     1
     0
     0
```

Nondefault Numeric Data Type

Create a 3-by-3 identity matrix whose elements are 32-bit unsigned integers.

```
I = eye(3,'uint32'),
```

```
I = 3×3 uint32 matrix

   1   0   0
   0   1   0
   0   0   1
```

```
class(I)
```

```
ans =
'uint32'
```

Complex Identity Matrix

Create a 2-by-2 identity matrix that is not real valued, but instead is complex like an existing array.

Define a complex vector.

```
p = [1+2i 3i];
```

Create an identity matrix that is complex like p.

```
I = eye(2,'like',p)
```

```
I =
   1.0000 + 0.0000i   0.0000 + 0.0000i
   0.0000 + 0.0000i   1.0000 + 0.0000i
```

Sparse Identity Matrix

Define a 5-by-5 sparse matrix.

```
p = sparse(5,5,pi);
```

Create a 5-by-5 identity matrix that is sparse like P.

```
I = eye(5,'like',p)
```

```
I =
   (1,1)        1
   (2,2)        1
   (3,3)        1
   (4,4)        1
   (5,5)        1
```

Size and Numeric Data Type Defined by Existing Array

Define a 2-by-2 matrix of single precision.

```
p = single([1 3 ; 2 4]);
```

Create an identity matrix that is the same size and data type as P.

```
I = eye(size(p),'like',p),
```

```
I = 2×2 single matrix

     1     0
     0     1
```

```
class(I)
```

```
ans =
'single'
```

Input Arguments

n — Size of first dimension of I

integer value

Size of first dimension of I, specified as an integer value.

- If n is the only integer input argument, then I is a square n-by-n identity matrix.
- If n is 0, then I is an empty matrix.
- If n is negative, then it is treated as 0.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

m — Size of second dimension of I

integer value

Size of second dimension of I, specified as an integer value.

- If m is 0, then I is an empty matrix.
- If m is negative, then it is treated as 0.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

sz — Size of I

row vector of no more than two integer values

Size of I, specified as a row vector of no more than two integer values.

- If an element of sz is 0, then I is an empty matrix.
- If an element of sz is negative, then the element is treated as 0.

Example: sz = [2,3] defines I as a 2-by-3 matrix.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`classname` — Output class
`'double'` (default) | `'single'` | `'logical'` | `'int8'` | `'uint8'` | ...

Output class, specified as `'double'`, `'single'`, `logical`, `'int8'`, `'uint8'`, `'int16'`, `'uint16'`, `'int32'`, `'uint32'`, `'int64'`, or `'uint64'`.

Data Types: `char`

`p` — Prototype
numeric variable

Prototype, specified as a numeric variable.

Data Types: `double` | `single` | `logical` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`
Complex Number Support: Yes

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- `classname` must be a built-in MATLAB numeric type. Does not invoke the static `eye` method for other classes. For example, `eye(m, n, 'myclass')` does not invoke `myclass.eye(m,n)`.
- Size arguments must have a fixed size.

See Also

See Also

`ones` | `speye` | `zeros`

Topics

"Class Support for Array-Creation Functions"

Introduced before R2006a

ezcontour

(Not recommended) Easy-to-use contour plotter

Compatibility

`ezcontour` is not recommended. Use `fcontour` instead.

Syntax

```
ezcontour(fun)
ezcontour(fun,domain)
ezcontour(...,n)
ezcontour(axes_handle,...)
h = ezcontour(...)
```

Description

`ezcontour(fun)` plots the contour lines of `fun(x,y)` using the `contour` function. `fun` is plotted over the default domain: -2π < `x` < 2π, -2π < `y` < 2π.

`fun` can be a function handle for a MATLAB file function or an anonymous function (see "Create Function Handle" and "Anonymous Functions") or a character vector (see Tips).

`ezcontour(fun,domain)` plots `fun(x,y)` over the specified `domain`. `domain` can be either a 4-by-1 vector `[xmin, xmax, ymin, ymax]` or a 2-by-1 vector `[min, max]` (where `min` < x < `max`, `min` < y < `max`).

`ezcontour(...,n)` plots `fun` over the default domain using an `n`-by-`n` grid. The default value for `n` is 60.

`ezcontour(axes_handle,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = ezcontour(...)` returns the handle to a contour object in `h`.

`ezcontour` automatically adds a title and axis labels.

Examples

Create Contour Plot of Mathematical Expression

This mathematical expression defines a function of two variables, x and y.

$$f(x,y) = 3(1-x)^2 e^{-x^2-(y+1)^2} - 10\left(\frac{x}{5} - x^3 - y^5\right)e^{-x^2-y^2} - \frac{1}{3}e^{-(x+1)^2-y^2}$$

The `ezcontour` function requires a function handle argument. Write this mathematical expression in MATLAB® syntax as an anonymous function with handle `f`. You can define an anonymous function in the command window without creating a separate file. For convenience, write the function on three lines.

```
f = @(x,y) 3*(1-x).^2.*exp(-(x.^2) - (y+1).^2) ...
   - 10*(x/5 - x.^3 - y.^5).*exp(-x.^2-y.^2) ...
   - 1/3*exp(-(x+1).^2 - y.^2);
```

Pass the function handle, `f`, to `ezcontour`. Specify a domain from -3 to 3 in both the x-direction and y-direction and use a 49-by-49 computational grid.

```
ezcontour(f,[-3,3],49)
```

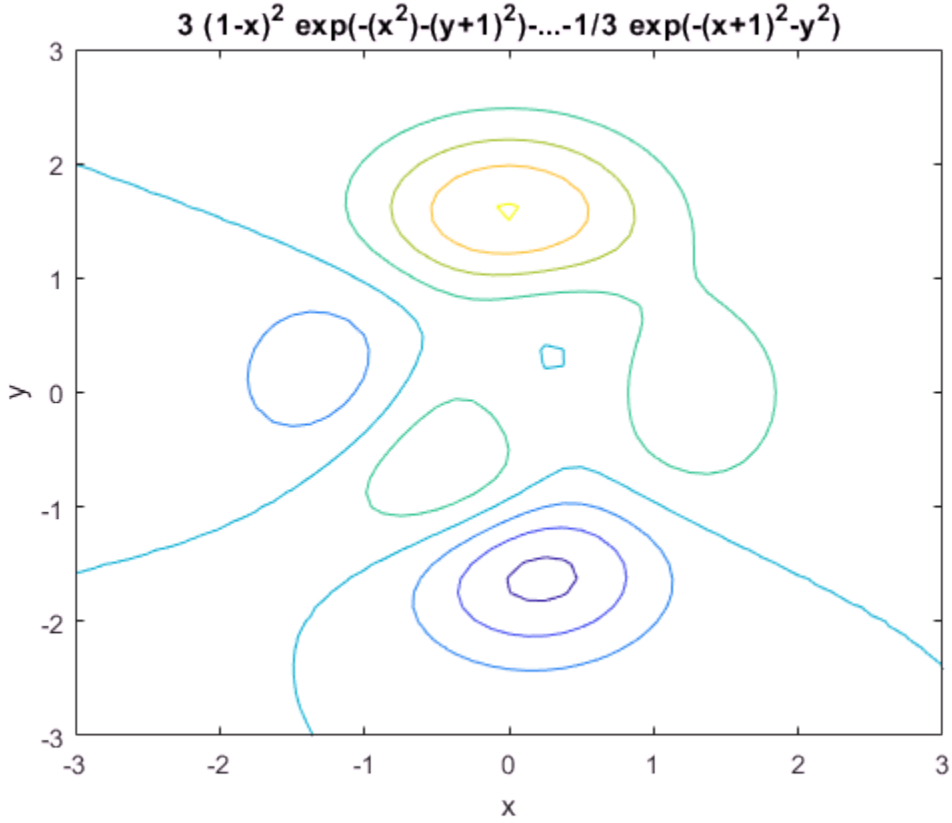

In this particular case, the title is too long to fit at the top of the graph so MATLAB® abbreviates it.

Tips

Passing the Function as a Character Vector

Array multiplication, division, and exponentiation are always implied in the character vector expression you pass to `ezcontour`. For example, the MATLAB syntax for a contour plot of the expression

```
sqrt(x.^2 + y.^2)
```

is written as

```
ezcontour('sqrt(x^2 + y^2)')
```

That is, `x^2` is interpreted as `x.^2` in the character vector you pass to `ezcontour`.

If the function to be plotted is a function of the variables u and v (rather than x and y), the domain endpoints `umin`, `umax`, `vmin`, and `vmax` are sorted alphabetically. Thus, `ezcontour('u^2 - v^3',[0,1],[3,6])` plots the contour lines for $u^2 - v^3$ over $0 < u < 1$, $3 < v < 6$.

Passing a Function Handle

Function handle arguments must point to functions that use MATLAB syntax. For example, the following statements define an anonymous function and pass the function handle `fh` to `ezcontour`.

```
fh = @(x,y) sqrt(x.^2 + y.^2);
ezcontour(fh)
```

When using function handles, you must use the array power, array multiplication, and array division operators (`.^, .*, ./`) since `ezcontour` does not alter the syntax, as in the case with character vector inputs.

Passing Additional Arguments

If your function has additional parameters, for example, `k` in `myfun`:

```
function z = myfun(x,y,k)
z = x.^k - y.^k - 1;
```

then use an anonymous function to specify that parameter:

```
ezcontour(@(x,y)myfun(x,y,2))
```

See Also

`fcontour` | `fmesh` | `fplot` | `fplot3` | `fsurf` | `contour`

Introduced before R2006a

ezcontourf

(Not recommended) Easy-to-use filled contour plotter

Compatibility

`ezcontourf` is not recommended. Use `fcontour` instead.

Syntax

```
ezcontourf(fun)
ezcontourf(fun,domain)
ezcontourf(...,n)
ezcontourf(axes_handle,...)
h = ezcontourf(...)
```

Description

`ezcontourf(fun)` plots the contour lines of `fun(x,y)` using the `contourf` function. `fun` is plotted over the default domain: $-2\pi < x < 2\pi$, $-2\pi < y < 2\pi$.

`fun` can be a function handle or a character vector (see Tips).

`ezcontourf(fun,domain)` plots `fun(x,y)` over the specified `domain`. `domain` can be either a 4-by-1 vector `[xmin, xmax, ymin, ymax]` or a 2-by-1 vector `[min, max]`, where `min < x < max`, `min < y < max`).

`ezcontourf(...,n)` plots `fun` over the default domain using an `n`-by-`n` grid. The default value for `n` is 60.

`ezcontourf(axes_handle,...)` plots into the axes with the handle `axes_handle` instead of into the current axes (`gca`).

`h = ezcontourf(...)` returns the handle to a contour object in `h`.

`ezcontourf` automatically adds a title and axis labels.

Examples

Create Filled Contour Plot of Mathematical Expression

This mathematical expression defines a function of two variables, x and y.

$$f(x,y) = 3(1-x)^2 e^{-x^2-(y+1)^2} - 10\left(\frac{x}{5} - x^3 - y^5\right)e^{-x^2-y^2} - \frac{1}{3}e^{-(x+1)^2-y^2}$$

The `ezcontourf` function requires a function handle argument. Write this mathematical expression in MATLAB® syntax as an anonymous function with handle `f`. You can define an anonymous function in the command window without creating a separate file. For convenience, write the function on three lines.

```
f = @(x,y) 3*(1-x).^2.*exp(-(x.^2) - (y+1).^2) ...
   - 10*(x/5 - x.^3 - y.^5).*exp(-x.^2-y.^2) ...
   - 1/3*exp(-(x+1).^2 - y.^2);
```

Pass the function handle, `f`, to `ezcontourf`. Specify a domain from -3 to 3 in both the x-direction and y-direction and use a 49-by-49 computational grid.

```
ezcontourf(f,[-3,3],49)
```

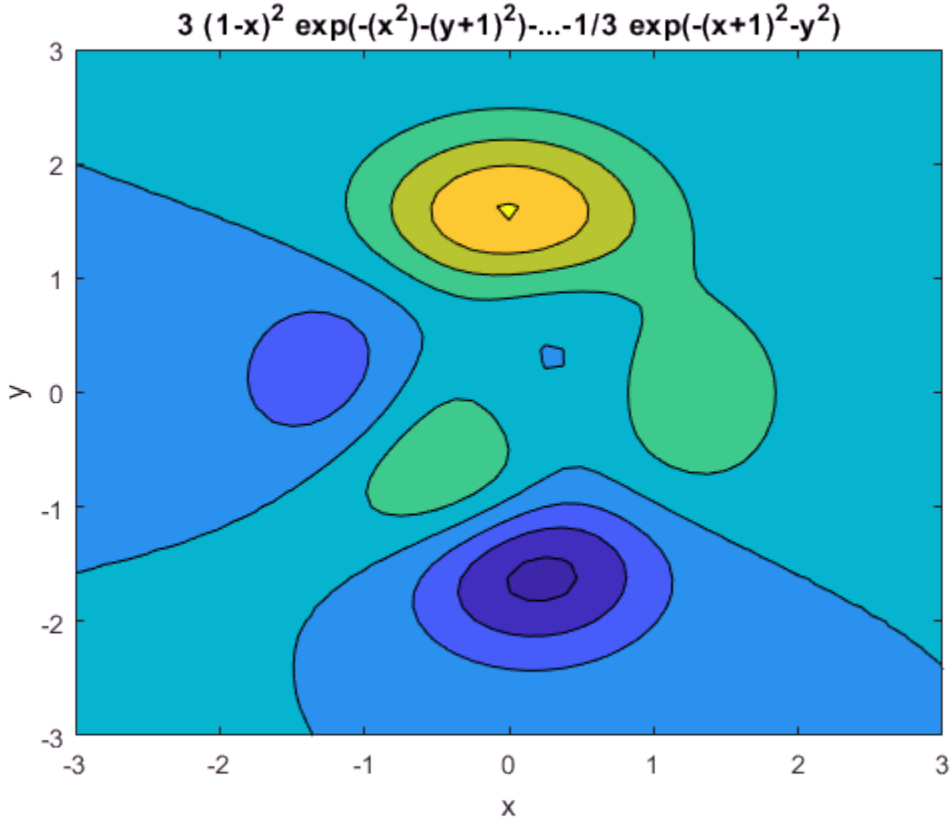

In this particular case, the title is too long to fit at the top of the graph so MATLAB® abbreviates it.

Tips

Passing the Function as a Character Vector

Array multiplication, division, and exponentiation are always implied in the character vector expression you pass to `ezcontourf`. For example, the MATLAB syntax for a filled contour plot of the expression

```
sqrt(x.^2 + y.^2);
```

is written as

```
ezcontourf('sqrt(x^2 + y^2)')
```

That is, `x^2` is interpreted as `x.^2` in the character vector you pass to `ezcontourf`.

If the function to be plotted is a function of the variables u and v (rather than x and y), then the domain endpoints `umin`, `umax`, `vmin`, and `vmax` are sorted alphabetically. Thus, `ezcontourf('u^2 - v^3',[0,1],[3,6])` plots the contour lines for $u^2 - v^3$ over $0 < u < 1$, $3 < v < 6$.

Passing a Function Handle

Function handle arguments must point to functions that use MATLAB syntax. For example, the following statements define an anonymous function and pass the function handle `fh` to `ezcontourf`.

```
fh = @(x,y) sqrt(x.^2 + y.^2);
ezcontourf(fh)
```

When using function handles, you must use the array power, array multiplication, and array division operators (`.^, .*, ./`) since `ezcontourf` does not alter the syntax, as in the case with character vector inputs.

Passing Additional Arguments

If your function has additional parameters, for example, `k` in `myfun`:

```
function z = myfun(x,y,k)
z = x.^k - y.^k - 1;
```

then you can use an anonymous function to specify that parameter:

```
ezcontourf(@(x,y)myfun(x,y,2))
```

See Also

`fcontour` | `fmesh` | `fplot` | `fplot3` | `fsurf` | `contourf`

Topics

Anonymous Functions

Introduced before R2006a

ezmesh

(Not recommended) Easy-to-use 3-D mesh plotter

Compatibility

`ezmesh` is not recommended. Use `fmesh` instead.

Syntax

```
ezmesh(fun)
ezmesh(fun,domain)
ezmesh(funx,funy,funz)
ezmesh(funx,funy,funz,[smin,smax,tmin,tmax])
ezmesh(funx,funy,funz,[min,max])
ezmesh(...,n)
ezmesh(...,'circ')
ezmesh(axes_handle,...)
h = ezmesh(...)
```

Description

`ezmesh(fun)` creates a graph of `fun(x,y)` using the `mesh` function. `fun` is plotted over the default domain: $-2\pi < x < 2\pi$, $-2\pi < y < 2\pi$.

`fun` can be a function handle or a character vector (see the Tips section).

`ezmesh(fun,domain)` plots `fun` over the specified `domain`. `domain` can be either a 4-by-1 vector [`xmin`, `xmax`, `ymin`, `ymax`] or a 2-by-1 vector [`min`, `max`] (where `min` < `x` < `max`, `min` < `y` < `max`).

`ezmesh(funx,funy,funz)` plots the parametric surface `funx(s,t)`, `funy(s,t)`, and `funz(s,t)` over the square: $-2\pi < s < 2\pi$, $-2\pi < t < 2\pi$.

`ezmesh(funx,funy,funz,[smin,smax,tmin,tmax])` or `ezmesh(funx,funy,funz,[min,max])` plots the parametric surface using the specified domain.

`ezmesh(...,n)` plots `fun` over the default domain using an `n`-by-`n` grid. The default value for `n` is 60.

`ezmesh(...,'circ')` plots `fun` over a disk centered on the domain.

`ezmesh(axes_handle,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = ezmesh(...)` returns the handle to a surface object in `h`.

Examples

Mesh Plot of Mathematical Function

Create a mesh plot of the function $f(x, y) = xe^{-x^2-y^2}$ over a 40-by-40 grid.

```
fh = @(x,y) x.*exp(-x.^2-y.^2);
ezmesh(fh,40)
```

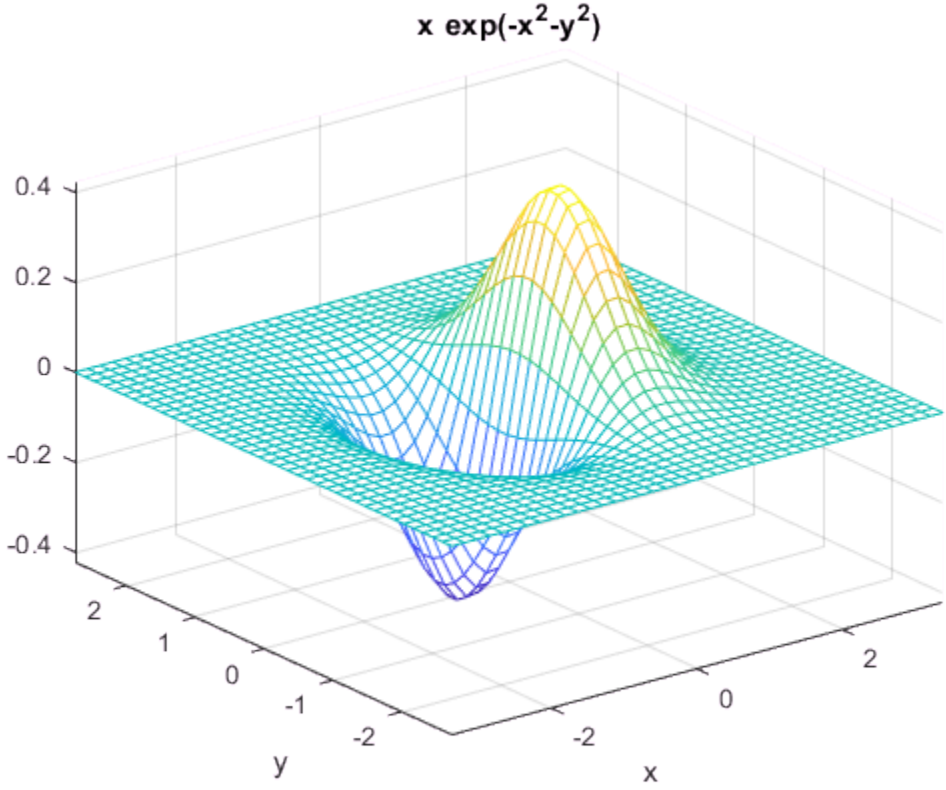

Set the mesh lines to a uniform blue color by setting the colormap to a single color.

```
colormap([0 0 1])
```

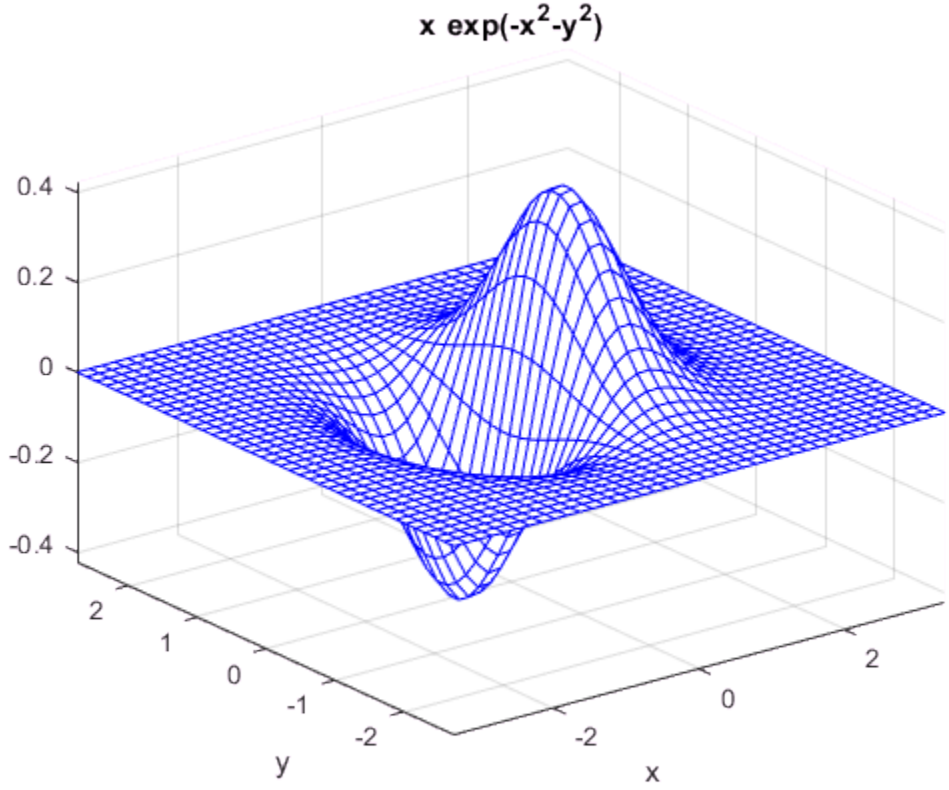

Tips

Passing the Function as a Character Vector

Array multiplication, division, and exponentiation are always implied in the character vector expression you pass to `ezmesh`. For example, the MATLAB syntax for a mesh plot of the expression

```
sqrt(x.^2 + y.^2);
```

is written as

```
ezmesh('sqrt(x^2 + y^2)')
```

That is, `x^2` is interpreted as `x.^2` in the character vector you pass to `ezmesh`.

If the function to be plotted is a function of the variables u and v (rather than x and y), then the domain endpoints `umin`, `umax`, `vmin`, and `vmax` are sorted alphabetically. Thus, `ezmesh('u^2 - v^3',[0,1],[3,6])` plots $u^2 - v^3$ over $0 < u < 1$, $3 < v < 6$.

Passing a Function Handle

Function handle arguments must point to functions that use MATLAB syntax. For example, the following statements define an anonymous function and pass the function handle `fh` to `ezmesh`.

```
fh = @(x,y) sqrt(x.^2 + y.^2);
ezmesh(fh)
```

Note that when using function handles, you must use the array power, array multiplication, and array division operators (`.^, .*, ./`) since `ezmesh` does not alter the syntax, as in the case with character vector inputs.

Passing Additional Arguments

If your function has additional parameters, for example `k` in `myfun`:

```
function z = myfun(x,y,k)
z = x.^k - y.^k - 1;
```

then you can use an anonymous function to specify that parameter:

```
ezmesh(@(x,y)myfun(x,y,2))
```

See Also

`fcontour` | `fmesh` | `fplot` | `fplot3` | `fsurf` | `mesh`

Topics

Anonymous Functions

Introduced before R2006a

ezmeshc

(Not recommended) Easy-to-use combination mesh/contour plotter

Compatibility

`ezmeshc` is not recommended. Use `fmesh` instead.

Syntax

```
ezmeshc(fun)
ezmeshc(fun,domain)
ezmeshc(funx,funy,funz)
ezmeshc(funx,funy,funz,[smin,smax,tmin,tmax])
ezmeshc(funx,funy,funz,[min,max])
ezmeshc(...,n)
ezmeshc(...,'circ')
ezmesh(axes_handle,...)
h = ezmeshc(...)
```

Description

`ezmeshc(fun)` creates a graph of `fun(x,y)` using the `meshc` function. `fun` is plotted over the default domain $-2\pi < x < 2\pi$, $-2\pi < y < 2\pi$.

`fun` can be a function handle or a character vector (see the Tips section).

`ezmeshc(fun,domain)` plots `fun` over the specified `domain`. `domain` can be either a 4-by-1 vector [`xmin`, `xmax`, `ymin`, `ymax`] or a 2-by-1 vector [`min`, `max`] (where `min` < `x` < `max`, `min` < `y` < `max`).

`ezmeshc(funx,funy,funz)` plots the parametric surface `funx(s,t)`, `funy(s,t)`, and `funz(s,t)` over the square: $-2\pi < s < 2\pi$, $-2\pi < t < 2\pi$.

`ezmeshc(funx,funy,funz,[smin,smax,tmin,tmax])` or `ezmeshc(funx,funy,funz,[min,max])` plots the parametric surface using the specified domain.

`ezmeshc(...,n)` plots `fun` over the default domain using an `n`-by-`n` grid. The default value for `n` is 60.

`ezmeshc(...,'circ')` plots `fun` over a disk centered on the domain.

`ezmesh(axes_handle,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = ezmeshc(...)` returns the handle to a surface object in `h`.

Examples

Mesh and Contour Plot of Mathematical Function

Create a mesh/contour plot of the expression $f(x, y) = \sqrt{x^2 + y^2}$ over the domain $-5 < x < 5$ and $-2\pi < y < 2\pi$ with a computational grid size of 35-by-35.

```
ezmeshc('sqrt(x^2 + y^2)',[-5,5,-2*pi,2*pi],35)
```

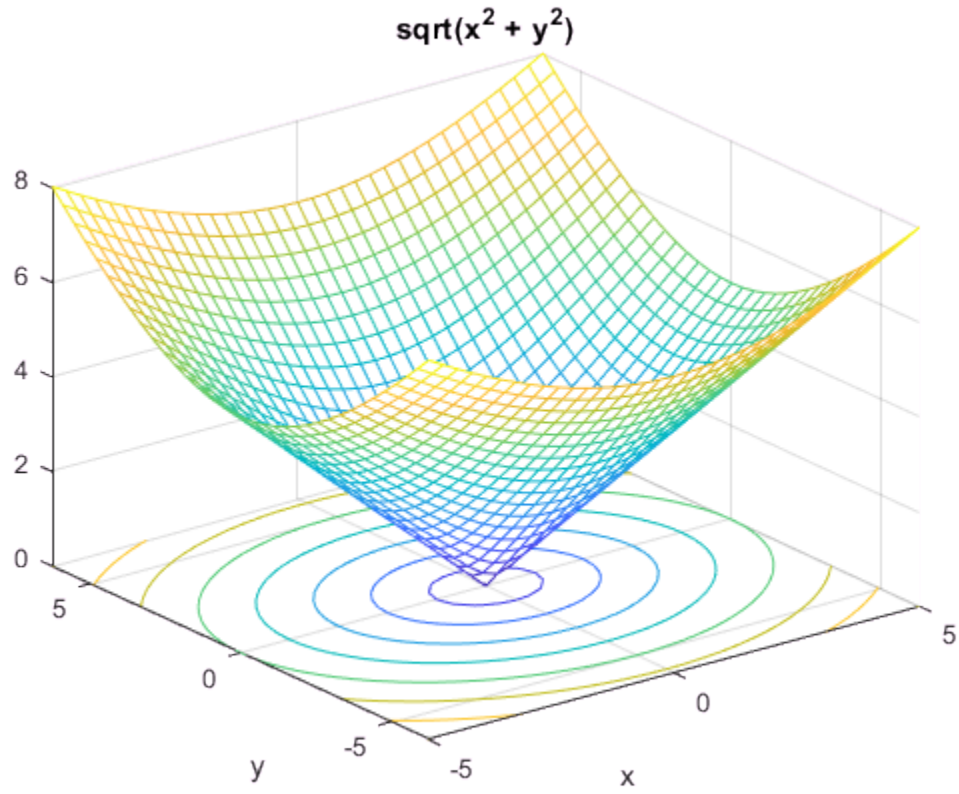

Tips

Passing the Function as a Character Vector

Array multiplication, division, and exponentiation are always implied in the character vector expression you pass to `ezmeshc`. For example, the MATLAB syntax for a mesh/contour plot of the expression

```
sqrt(x.^2 + y.^2);
```

is written as

```
ezmeshc('sqrt(x^2 + y^2)')
```

That is, `x^2` is interpreted as `x.^2` in the character vector you pass to `ezmeshc`.

If the function to be plotted is a function of the variables u and v (rather than x and y), then the domain endpoints `umin`, `umax`, `vmin`, and `vmax` are sorted alphabetically. Thus, `ezmeshc('u^2 - v^3',[0,1],[3,6])` plots $u^2 - v^3$ over $0 < u < 1$, $3 < v < 6$.

Passing a Function Handle

Function handle arguments must point to functions that use MATLAB syntax. For example, the following statements define an anonymous function and pass the function handle `fh` to `ezmeshc`.

```
fh = @(x,y) sqrt(x.^2 + y.^2);
ezmeshc(fh)
```

Note that when using function handles, you must use the array power, array multiplication, and array division operators (`.^, .*, ./`) since `ezmeshc` does not alter the syntax, as in the case with character vector inputs.

Passing Additional Arguments

If your function has additional parameters, for example `k` in `myfun`:

```
function z = myfun(x,y,k)
z = x.^k - y.^k - 1;
```

then you can use an anonymous function to specify that parameter:

```
ezmeshc(@(x,y)myfun(x,y,2))
```

See Also

`fcontour` | `fmesh` | `fplot` | `fplot3` | `fsurf` | `mesh`

Topics

Anonymous Functions

ezplot

(Not recommended) Easy-to-use function plotter

Compatibility

`ezplot` is not recommended. Use `fplot` instead.

Syntax

```
ezplot(fun)
ezplot(fun,[xmin,xmax])
ezplot(fun2)
ezplot(fun2,[xymin,xymax])
ezplot(fun2,[xmin,xmax,ymin,ymax])
ezplot(funx,funy)
ezplot(funx,funy,[tmin,tmax])
ezplot(...,fig)
ezplot(ax,...)
h = ezplot(...)
```

Description

`ezplot(fun)` plots the expression `fun(x)` over the default domain -2π < `x` < 2π, where `fun(x)` is an explicit function of only `x`.

`fun` can be a function handle or a character vector.

`ezplot(fun,[xmin,xmax])` plots `fun(x)` over the domain: `xmin` < `x` < `xmax`.

For an implicit function, `fun2(x,y)`:

`ezplot(fun2)` plots `fun2(x,y) = 0` over the default domain -2π < `x` < 2π, -2π < `y` < 2π.

`ezplot(fun2,[xymin,xymax])` plots `fun2(x,y) = 0` over `xymin` < `x` < `xymax` and `xymin` < `y` < `xymax`.

`ezplot(fun2,[xmin,xmax,ymin,ymax])` plots `fun2(x,y) = 0` over `xmin` < `x` < `xmax` and `ymin` < `y` < `ymax`.

`ezplot(funx,funy)` plots the parametrically defined planar curve `funx(t)` and `funy(t)` over the default domain 0 < `t` < 2π.

`ezplot(funx,funy,[tmin,tmax])` plots `funx(t)` and `funy(t)` over `tmin` < `t` < `tmax`.

`ezplot(...,fig)` plots into the figure window identified by `fig`. Use any of the input argument combinations in the previous syntaxes that include a domain. The domain options are `[xmin xmax]`, `[xymin xymax]`, `[xmin xmax ymin ymax]`, and `[tmin tmax]`.

`ezplot(ax,...)` plots into the axes `ax` instead of the current axes (`gca`).

`h = ezplot(...)` returns either a chart line or contour object.

Examples

Plot an Explicit Function

Plot the explicit function x^2 over the domain $[-2\pi, 2\pi]$.

```
ezplot('x^2')
```

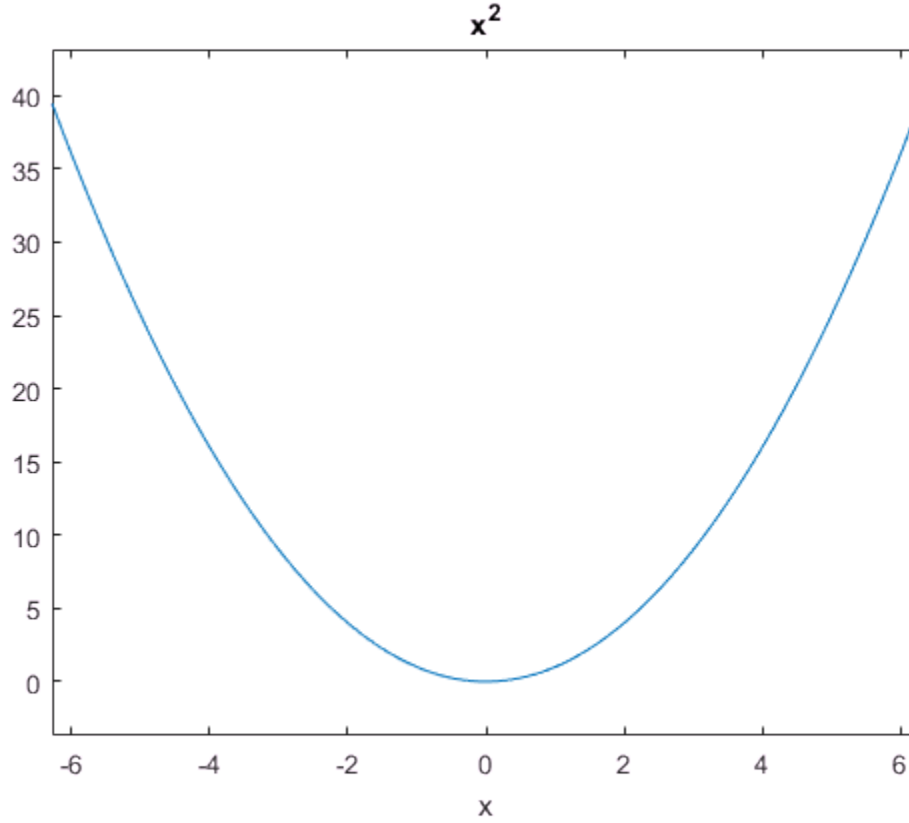

The default domain is $[-2\pi, 2\pi]$.

Plot an Implicit Function

Plot the implicitly defined function $x^2 - y^4 = 0$ over the domain $[-2\pi, 2\pi]$.

```
ezplot('x^2-y^4')
```

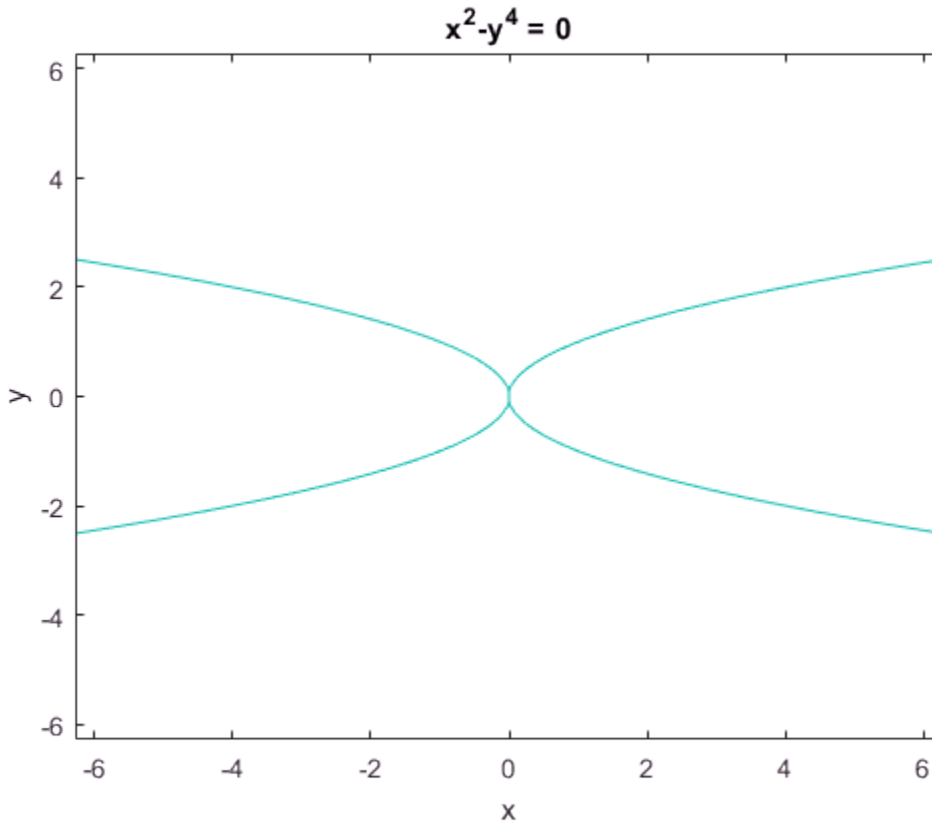

The default domain is $[-2\pi, 2\pi]$.

Tips

Passing the Function as a Character Vector

Array multiplication, division, and exponentiation are always implied in the expression you pass to `ezplot`. For example, the MATLAB syntax for a plot of the expression

```
x.^2 - y.^2
```

which represents an implicitly defined function, is written as

```
ezplot('x^2 - y^2')
```

That is, `x^2` is interpreted as `x.^2` in the character vector you pass to `ezplot`.

Passing a Function Handle

Function handle arguments must point to functions that use MATLAB syntax. For example, the following statements define an anonymous function and pass the function handle `fh` to `ezplot`.

```
fh = @(x,y) x.^2 + y.^3 - 2*y - 1;
ezplot(fh)
axis equal
```

Note that when using function handles, you must use the array power, array multiplication, and array division operators (`.^, .*, ./`) since `ezplot` does not alter the syntax, as in the case with character vector inputs.

Passing Additional Arguments

If your function has additional parameters, for example `k` in `myfun`:

```
function z = myfun(x,y,k)
z = x.^k - y.^k - 1;
```

then you can use an anonymous function to specify that parameter:

```
ezplot(@(x,y)myfun(x,y,2))
```

See Also

`fcontour` | `fmesh` | `fplot` | `fplot3` | `fsurf` | `plot`

Topics

Anonymous Functions

Introduced before R2006a

ezplot3

(Not recommended) Easy-to-use 3-D parametric curve plotter

Compatibility

`ezplot3` is not recommended. Use `fplot3` instead.

Syntax

```
ezplot3(funx,funy,funz)
ezplot3(funx,funy,funz,[tmin,tmax])
ezplot3(...,'animate')
ezplot3(axes_handle,...)
h = ezplot3(...)
```

Description

`ezplot3(funx,funy,funz)` plots the spatial curve `funx(t)`, `funy(t)`, and `funz(t)` over the default domain $0 < t < 2\pi$.

`funx`, `funy`, and `funz` can be function handles or character vectors (see the Tips section).

`ezplot3(funx,funy,funz,[tmin,tmax])` plots the curve `funx(t)`, `funy(t)`, and `funz(t)` over the domain `tmin` < `t` < `tmax`.

`ezplot3(...,'animate')` produces an animated trace of the spatial curve.

`ezplot3(axes_handle,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = ezplot3(...)` returns the handle to the plotted objects in `h`.

Examples

Plot a Parametric Curve

Plot this parametric curve over the domain $[0, 6\pi]$.

$$x = \sin(t),\ y = \cos(t),\ z = t$$

```
ezplot3('sin(t)','cos(t)','t',[0,6*pi])
```

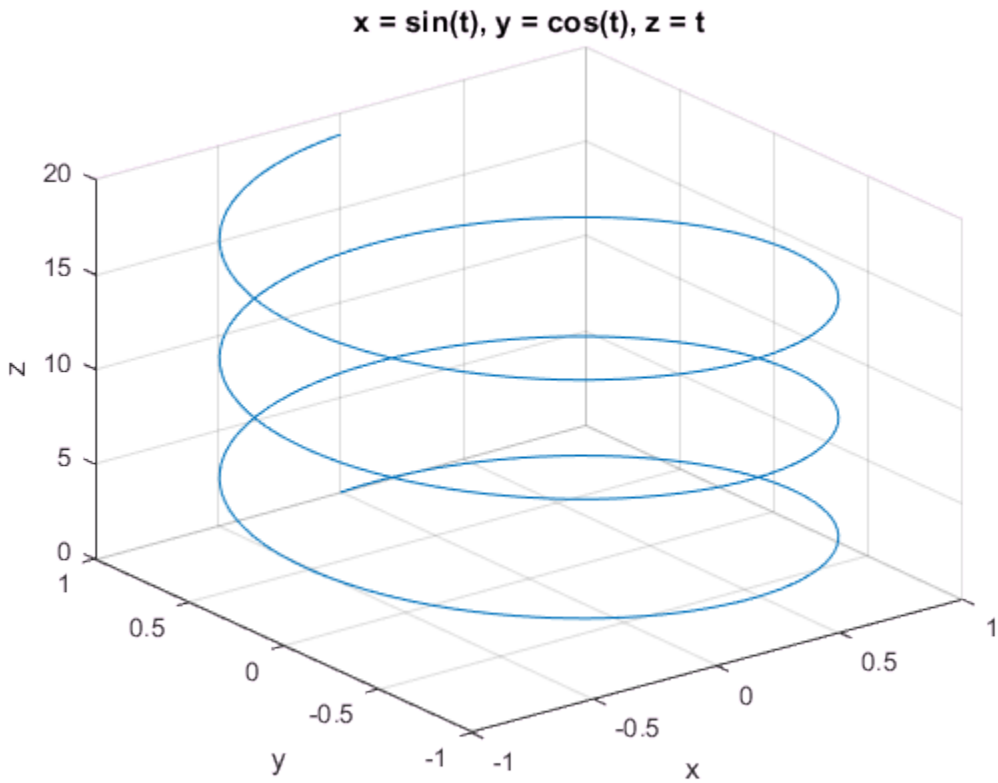

Tips

Passing the Function as a Character Vector

Array multiplication, division, and exponentiation are always implied in the expression you pass to `ezplot3`. For example, the MATLAB syntax for a plot of the expression

```
x = s./2, y = 2.*s, z = s.^2;
```

which represents a parametric function, is written as

```
ezplot3('s/2','2*s','s^2')
```

That is, `s/2` is interpreted as `s./2` in the character vector you pass to `ezplot3`.

Passing a Function Handle

Function handle arguments must point to functions that use MATLAB syntax. For example, the following statements define an anonymous function and pass the function handle `fh` to `ezplot3`.

```
fh1 = @(s) s./2; fh2 = @(s) 2.*s; fh3 = @(s) s.^2;
ezplot3(fh1,fh2,fh3)
```

Note that when using function handles, you must use the array power, array multiplication, and array division operators (`.^, .*, ./`) since `ezplot3` does not alter the syntax, as in the case with character vector inputs.

Passing Additional Arguments

If your function has additional parameters, for example `k` in `myfuntk`:

```
function s = myfuntk(t,k)
s = t.^k.*sin(t);
```

then you can use an anonymous function to specify that parameter:

```
ezplot3(@cos,@(t)myfuntk(t,1),@sqrt)
```

See Also

`fcontour` | `fmesh` | `fplot` | `fplot3` | `fsurf` | `plot3`

Topics

Anonymous Functions

Introduced before R2006a

ezpolar

Easy-to-use polar coordinate plotter

Syntax

```
ezpolar(fun)
ezpolar(fun,[a,b])
ezpolar(axes_handle,...)
h = ezpolar(...)
```

Description

`ezpolar(fun)` plots the polar curve `rho = fun(theta)` over the default domain $0 <$ `theta` $< 2\pi$.

`fun` can be a function handle or a character vector (see the Tips section).

`ezpolar(fun,[a,b])` plots `fun` for `a` < `theta` < `b`.

`ezpolar(axes_handle,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = ezpolar(...)` returns the handle to a line object in `h`.

Examples

Polar Plot of Mathematical Function

Plot the function $1 + \cos(t)$ over the domain $[0, 2\pi]$.

```
figure
ezpolar('1+cos(t)')
```

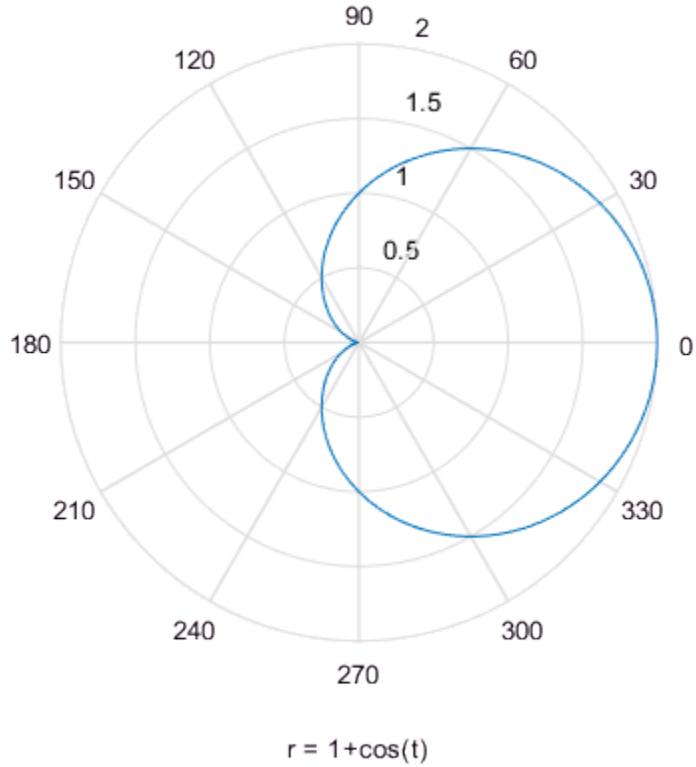

Tips

Passing the Function as a Character Vector

Array multiplication, division, and exponentiation are always implied in the expression you pass to `ezpolar`. For example, the MATLAB syntax for a plot of the expression

```
t.^2.*cos(t)
```

which represents an implicitly defined function, is written as

```
ezpolar('t^2*cos(t)')
```

That is, `t^2` is interpreted as `t.^2` in the character vector you pass to `ezpolar`.

Passing a Function Handle

Function handle arguments must point to functions that use MATLAB syntax. For example, the following statements define an anonymous function and pass the function handle `fh` to `ezpolar`.

```
fh = @(t) t.^2.*cos(t);
ezpolar(fh)
```

Note that when using function handles, you must use the array power, array multiplication, and array division operators (`.^, .*, ./`) since `ezpolar` does not alter the syntax, as in the case with character vector inputs.

Passing Additional Arguments

If your function has additional parameters, for example `k1` and `k2` in `myfun`:

```
function s = myfun(t,k1,k2)
s = sin(k1*t).*cos(k2*t);
```

then you can use an anonymous function to specify the parameters:

```
ezpolar(@(t)myfun(t,2,3))
```

See Also

`fcontour` | `fmesh` | `fplot` | `fplot3` | `fsurf` | `polarplot`

Topics

Anonymous Functions

Introduced before R2006a

ezsurf

(Not recommended) Easy-to-use 3-D colored surface plotter

Compatibility

`ezsurf` is not recommended. Use `fsurf` instead.

Syntax

```
ezsurf(fun)
ezsurf(fun,domain)
ezsurf(funx,funy,funz)
ezsurf(funx,funy,funz,[smin,smax,tmin,tmax])
ezsurf(funx,funy,funz,[min,max])
ezsurf(...,n)
ezsurf(...,'circ')
ezsurf(axes_handle,...)
h = ezsurf(...)
```

Description

`ezsurf(fun)` creates a graph of `fun(x,y)` using the `surf` function. `fun` is plotted over the default domain: $-2\pi < x < 2\pi$, $-2\pi < y < 2\pi$.

`fun` can be a function handle or a character vector (see the Tips section).

`ezsurf(fun,domain)` plots `fun` over the specified `domain`. `domain` must be a vector. See the "Algorithms" on page 1-3058 section for details on vector inputs vs axes limit outputs.

`ezsurf(funx,funy,funz)` plots the parametric surface `funx(s,t)`, `funy(s,t)`, and `funz(s,t)` over the square: $-2\pi < s < 2\pi$, $-2\pi < t < 2\pi$.

`ezsurf(funx,funy,funz,[smin,smax,tmin,tmax])` or `ezsurf(funx,funy,funz,[min,max])` plots the parametric surface using the specified domain.

`ezsurf(...,n)` plots `fun` over the default domain using an `n`-by-`n` grid. The default value for `n` is 60.

`ezsurf(...,'circ')` plots `fun` over a disk centered on the domain.

`ezsurf(axes_handle,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = ezsurf(...)` returns the handle to a surface object in `h`.

Examples

Surface Plot of Mathematical Function

Plot the function $f(x, y) = real(a\tan(x + iy))$ over the domain $-2\pi < x < 2\pi$ and $-2\pi < y < 2\pi$. The `ezsurf` function does not plot points where the mathematical function is not defined. These points are set to `NaN` so that they do not plot.

```
figure
ezsurf('real(atan(x+i*y))')
```

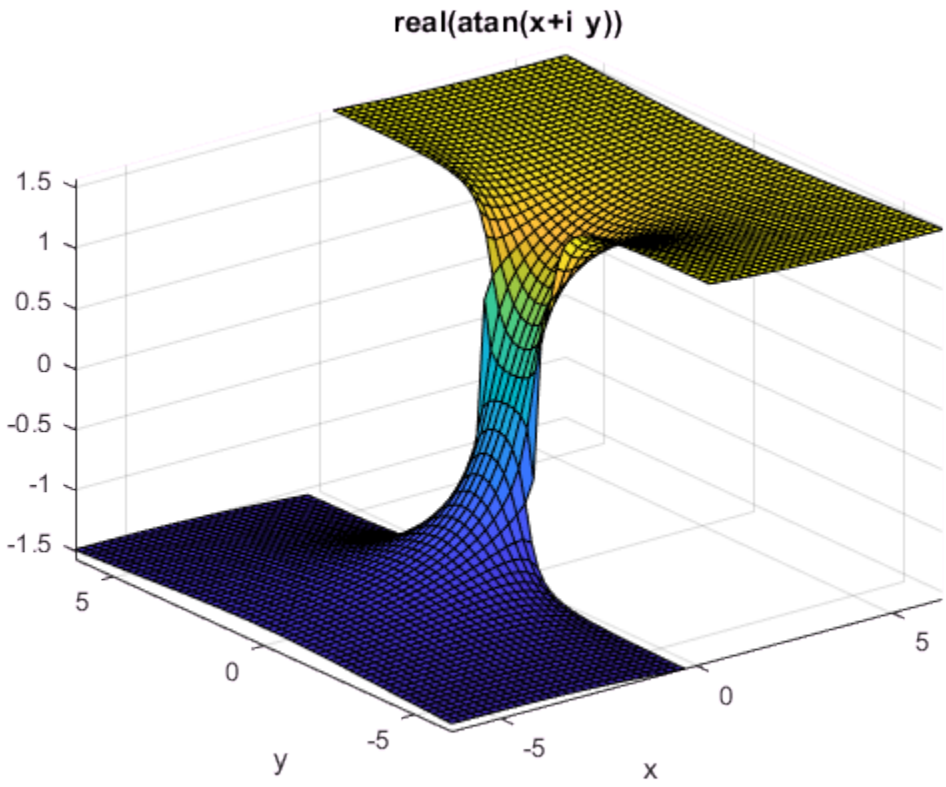

Use `surf` to plot the same data without filtering discontinuities.

```
figure
[x,y] = meshgrid(linspace(-2*pi,2*pi,60));
z = real(atan(x+1i.*y));
surf(x,y,z)
```

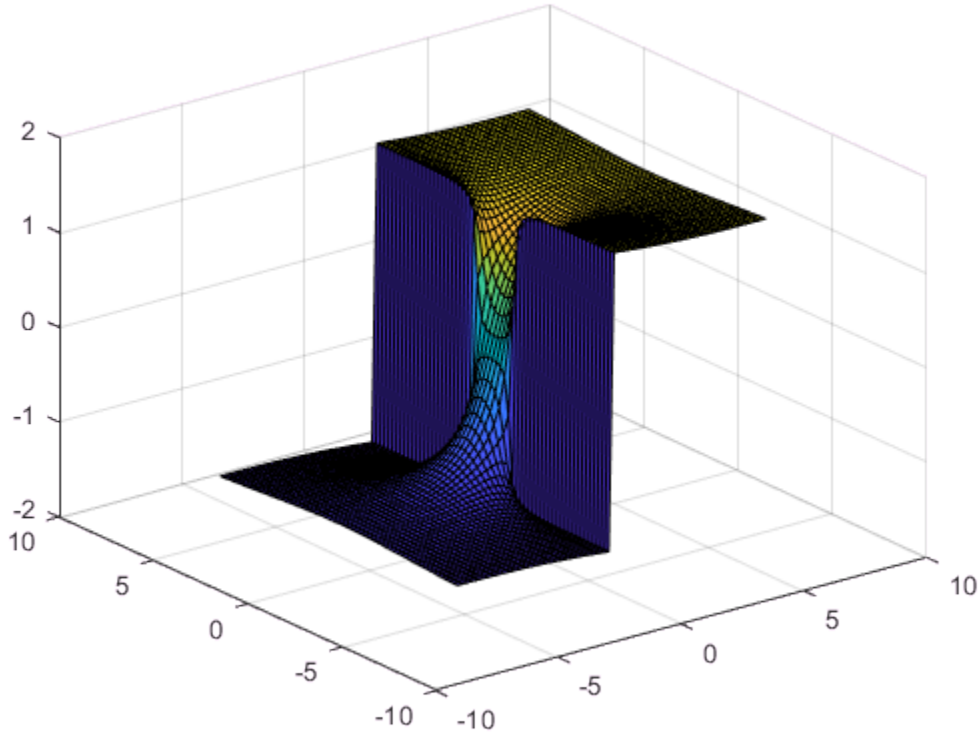

Tips

`ezsurf` and `ezsurfc` do not accept complex inputs.

Passing the Function as a Character Vector

Array multiplication, division, and exponentiation are always implied in the expression you pass to `ezsurf`. For example, the MATLAB syntax for a surface plot of the expression

```
sqrt(x.^2 + y.^2);
```

is written as

```
ezsurf('sqrt(x^2 + y^2)')
```

That is, `x^2` is interpreted as `x.^2` in the character vector you pass to `ezsurf`.

If the function to be plotted is a function of the variables u and v (rather than x and y), then the domain endpoints `umin`, `umax`, `vmin`, and `vmax` are sorted alphabetically. Thus, `ezsurf('u^2 - v^3',[0,1],[3,6])` plots $u^2 - v^3$ over $0 < u < 1$, $3 < v < 6$.

Passing a Function Handle

Function handle arguments must point to functions that use MATLAB syntax. For example, the following statements define an anonymous function and pass the function handle `fh` to `ezsurf`.

```
fh = @(x,y) sqrt(x.^2 + y.^2);
ezsurf(fh)
```

Note that when using function handles, you must use the array power, array multiplication, and array division operators (`.^, .*, ./`) since `ezsurf` does not alter the syntax, as in the case with character vector inputs.

Passing Additional Arguments

If your function has additional parameters, for example `k` in `myfun`:

```
function z = myfun(x,y,k1,k2,k3)
z = x.*(y.^k1)./(x.^k2 + y.^k3);
```

then you can use an anonymous function to specify that parameter:

```
ezsurf(@(x,y)myfun(x,y,2,2,4))
```

Algorithms

`ezsurf` determines the x- and y-axes limits in different ways depending on how you input the domain (if at all). In the following table, `R` is the vector [`xmin`, `xmax`, `ymin`, `ymax`] and `v` is the manually entered domain vector.

Number of domain values specified:	Resulting domain vector:
`v = [ ];`	`R = [-2*pi, 2*pi, -2*pi, 2*pi];`
`v = [ v(1) ];`	`R = double([-abs(v),abs(v),-abs(v),abs(v)]);`
`v = [ v(1) v(2) ];`	`R = double([v(1),v(2),v(1),v(2)]);`
`v = [ v(1) v(2) v(3) ];`	`R = double([-v(1),v(2),-abs(v(3)),abs(v(3))]);`
`v = [ v(1) v(2) v(3) v(4) ];`	`R = double(v);`
`v = [ v(1)..v(n) ]; n>4`	`R = double([-abs(v(1)), abs(v(1)), -abs(v(1)), abs(v(1))]);`

If you specify a single number in non-vector format (without square brackets, [ ]), `ezsurf` interprets it as the `n`, the number of points desired between the axes `max` and `min` values.

By default, `ezsurf` uses 60 points between the `max` and `min` values of an axes. When the `min` and `max` values are the default values (`R = [-2*pi, 2*pi, -2*pi, 2*pi];`), `ezsurf` ensures the 60 points fall within the non-complex range of the specified equation. For example, $\sqrt{1-x^2-y^2}$ is only real when $x^2-y^2 \le 1$. The default graph of this function looks like this:

```
ezsurf('sqrt(1-x^2-y^2)')
```

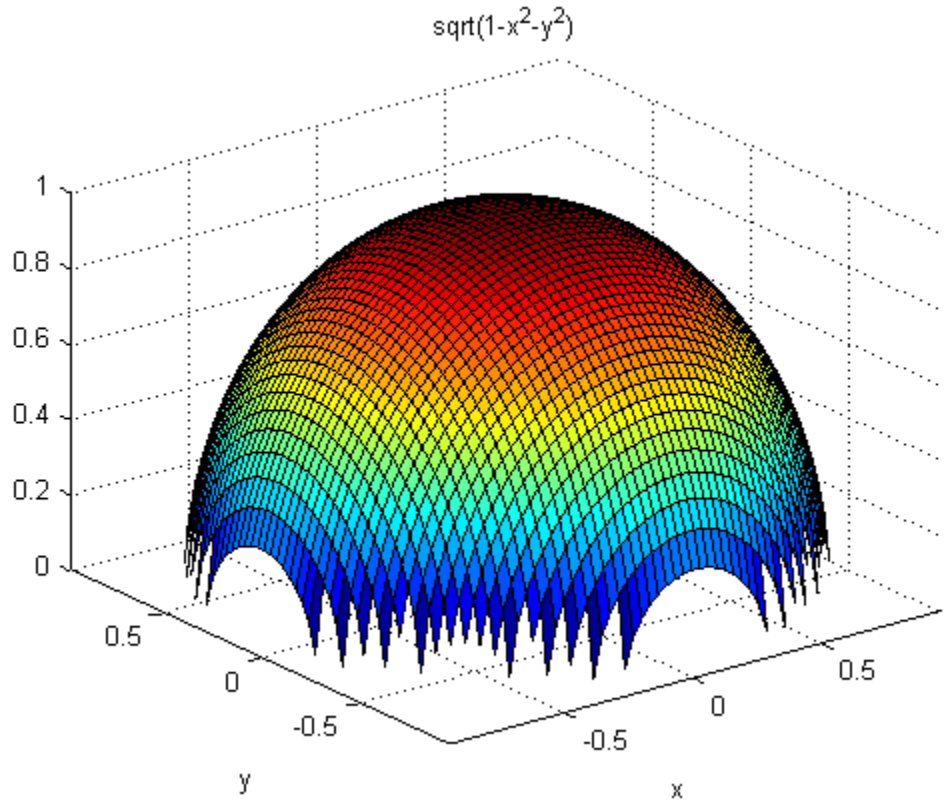

You can see that there are 60 points between the minimum and maximum values for which $\sqrt{1-x^2-y^2}$ has real values. However, when you specify the domain values to be the same as the default (`R = [-2*pi, 2*pi, -2*pi, 2*pi];`), a different result appears:

```
ezsurf('sqrt(1-x^2-y^2)',[-2*pi 2*pi])
```

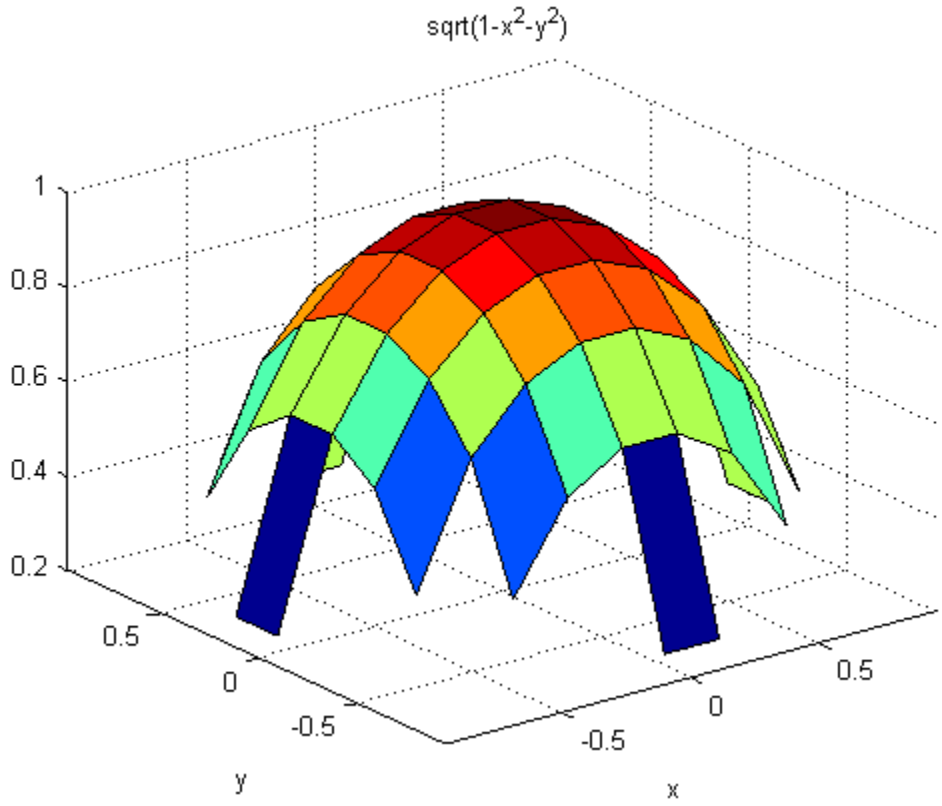

In this case, the graphic limits are the same, but `ezsurf` used 60 points between the user-defined limits instead of checking to see if all those points would have real answers.

See Also

`fcontour` | `fmesh` | `fplot` | `fplot3` | `fsurf` | `surf`

Topics

Anonymous Functions

Introduced before R2006a

ezsurfc

(Not recommended) Easy-to-use combination surface/contour plotter

Compatibility

`ezsurfc` is not recommended. Use `fsurf` instead.

Syntax

```
ezsurfc(fun)
ezsurfc(fun,domain)
ezsurfc(funx,funy,funz)
ezsurfc(funx,funy,funz,[smin,smax,tmin,tmax])
ezsurfc(funx,funy,funz,[min,max])
ezsurfc(...,n)
ezsurfc(...,'circ')
ezsurfc(axes_handle,...)
h = ezsurfc(...)
```

Description

`ezsurfc(fun)` creates a graph of `fun(x,y)` using the `surfc` function. The function `fun` is plotted over the default domain: $-2\pi < x < 2\pi$, $-2\pi < y < 2\pi$.

`fun` can be a function handle or a character vector (see the Tips section).

`ezsurfc(fun,domain)` plots `fun` over the specified `domain`. `domain` can be either a 4-by-1 vector [`xmin`, `xmax`, `ymin`, `ymax`] or a 2-by-1 vector [`min`, `max`] (where `min` < `x` < `max`, `min` < `y` < `max`).

`ezsurfc(funx,funy,funz)` plots the parametric surface `funx(s,t)`, `funy(s,t)`, and `funz(s,t)` over the square: $-2\pi < s < 2\pi$, $-2\pi < t < 2\pi$.

`ezsurfc(funx,funy,funz,[smin,smax,tmin,tmax])` or `ezsurfc(funx,funy,funz,[min,max])` plots the parametric surface using the specified domain.

`ezsurfc(...,n)` plots *f* over the default domain using an `n`-by-`n` grid. The default value for `n` is 60.

`ezsurfc(...,'circ')` plots *f* over a disk centered on the domain.

`ezsurfc(axes_handle,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = ezsurfc(...)` returns the handles to the graphics objects in `h`.

Examples

Surface and Contour Plot of Mathematical Function

Create a surface/contour plot of the expression $f(x, y) = \sqrt{x^2 + y^2}$ over the domain $-5 < x < 5$ and $-2\pi < y < 2\pi$ with a computational grid size of 35-by-35.

```
ezsurfc('sqrt(x^2 + y^2)',[-5,5,-2*pi,2*pi],35)
```

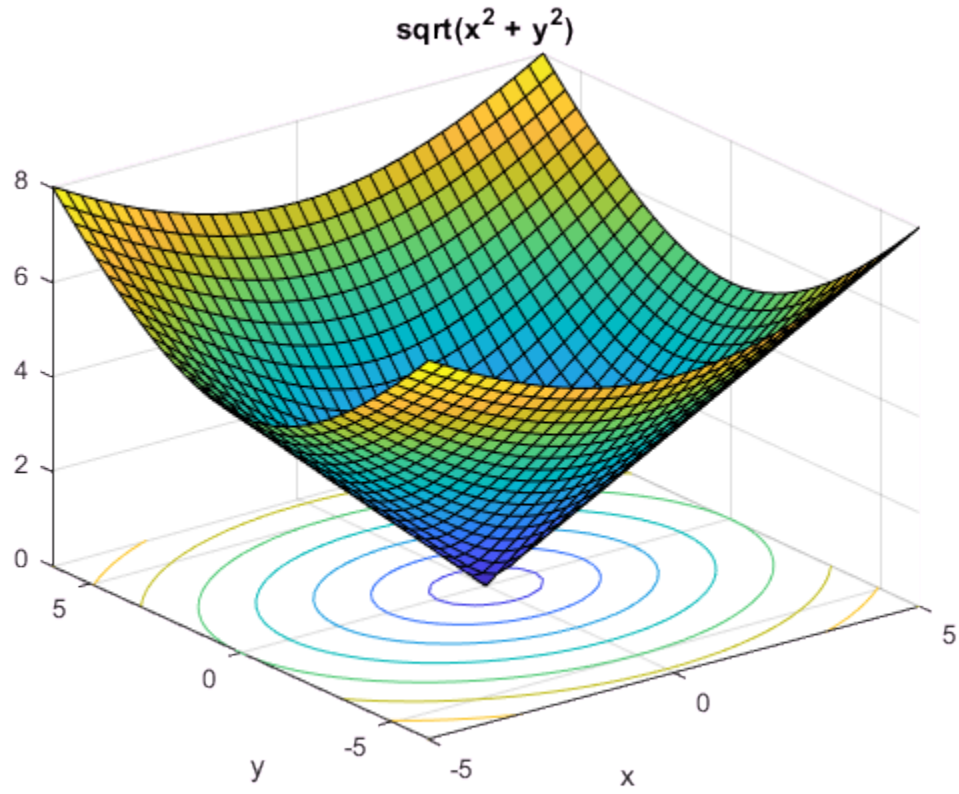

Tips

`ezsurf` and `ezsurfc` do not accept complex inputs.

Passing the Function as a Character Vector

Array multiplication, division, and exponentiation are always implied in the expression you pass to `ezsurfc`. For example, the MATLAB syntax for a surface/contour plot of the expression

```
sqrt(x.^2 + y.^2);
```

is written as

```
ezsurfc('sqrt(x^2 + y^2)')
```

That is, `x^2` is interpreted as `x.^2` in the character vector you pass to `ezsurfc`.

If the function to be plotted is a function of the variables u and v (rather than x and y), then the domain endpoints `umin`, `umax`, `vmin`, and `vmax` are sorted alphabetically. Thus, `ezsurfc('u^2 - v^3',[0,1],[3,6])` plots $u^2 - v^3$ over $0 < u < 1$, $3 < v < 6$.

Passing a Function Handle

Function handle arguments must point to functions that use MATLAB syntax. For example, the following statements define an anonymous function and pass the function handle `fh` to `ezsurfc`.

```
fh = @(x,y) sqrt(x.^2 + y.^2);
ezsurf(fh)
```

Note that when using function handles, you must use the array power, array multiplication, and array division operators (`.^, .*, ./`) since `ezsurfc` does not alter the syntax, as in the case with character vector inputs.

Passing Additional Arguments

If your function has additional parameters, for example `k` in `myfun`:

```
function z = myfun(x,y,k1,k2,k3)
z = x.*(y.^k1)./(x.^k2 + y.^k3);
```

then you can use an anonymous function to specify that parameter:

```
ezsurfc(@(x,y)myfun(x,y,2,2,4))
```

See Also

`fcontour` | `fmesh` | `fplot` | `fplot3` | `fsurf` | `surfc`

Topics

Anonymous Functions

Introduced before R2006a

faceNormals

Class: TriRep

(Not recommended) Unit normals to specified triangles

Note: `faceNormals(TriRep)` is not recommended. Use faceNormal(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
FN = faceNormals(TR, TI)
```

Description

`FN = faceNormals(TR, TI)` returns the unit normal vector to each of the specified triangles TI.

Note: This query is only applicable to triangular surface meshes.

Input Arguments

`TR`	Triangulation representation.
`TI`	Column vector of indices that index into the triangulation matrix `TR.Triangulation`.

Output Arguments

`FN`	`m`-by-3 matrix. `m = length(TI)`, the number of triangles to be queried. Each row `FN(i,:)` represents the unit normal vector to triangle `TI(i)`.

If TI is not specified the unit normal information for the entire triangulation is returned, where the normal associated with triangle i is the `i`'th row of `FN`.

Examples

Triangulate a sample of random points on the surface of a sphere and use the `TriRep` to compute the normal to each triangle:

```
numpts = 100;
thetha = rand(numpts,1)*2*pi;
phi = rand(numpts,1)*pi;
x = cos(thetha).*sin(phi);
y = sin(thetha).*sin(phi);
z = cos(phi);
dt = DelaunayTri(x,y,z);
[tri Xb] = freeBoundary(dt);
tr = TriRep(tri, Xb);
P = incenters(tr);
fn = faceNormals(tr);
trisurf(tri,Xb(:,1),Xb(:,2),Xb(:,3), ...
     'FaceColor', 'cyan', 'faceAlpha', 0.8);
axis equal;
hold on;
```

Display the result using a quiver plot:

```
quiver3(P(:,1),P(:,2),P(:,3), ...
     fn(:,1),fn(:,2),fn(:,3),0.5, 'color','r');
hold off;
```

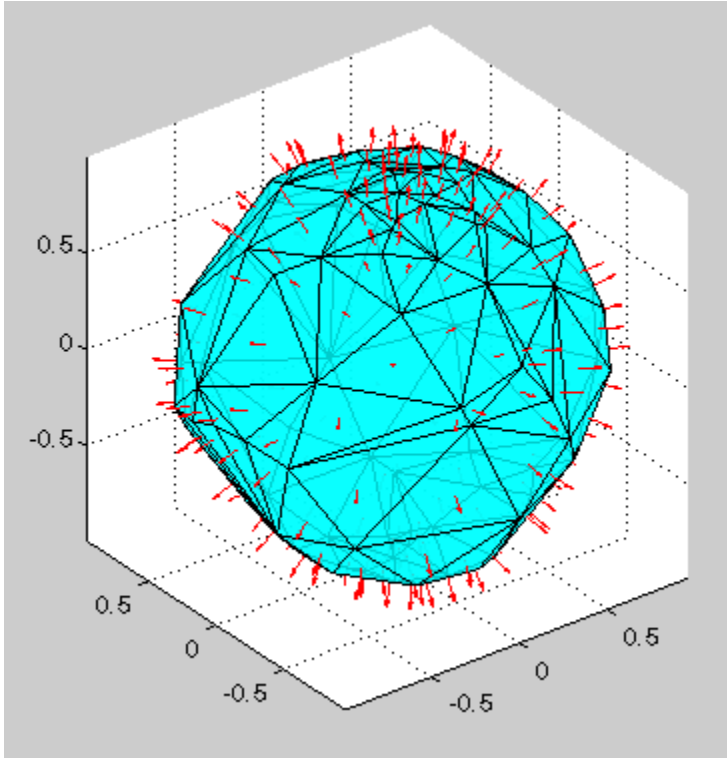

See Also

delaunayTriangulation | freeBoundary | triangulation

factor

Prime factors

Syntax

```
f = factor(n)
```

Description

`f = factor(n)` returns a row vector containing the prime factors of `n`. Vector `f` is of the same data type as `n`.

Examples

Prime Factors of Double Integer Value

```
f = factor(200)
```

```
f =

     2     2     2     5     5
```

Multiply the elements of `f` to reproduce the input value.

```
prod(f)
```

```
ans = 200
```

Prime Factors of Unsigned Integer Value

```
n = uint16(138);
f = factor(n)
```

```
f = 1×3 uint16 row vector

    2    3   23
```

Multiply the elements of `f` to reproduce `n`.

```
prod(f)
```

```
ans = 138
```

Input Arguments

n — Input value

real, nonnegative integer scalar

Input value, specified as a real, nonnegative integer scalar.

Example: `10`

Example: `int16(64)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The maximum double precision input is `2^33`.
- The maximum single precision input is `2^25`.
- The input `n` cannot have type `int64` or `uint64`.

See Also

See Also

`isprime` | `primes`

Introduced before R2006a

factorial

Factorial of input

Syntax

```
f = factorial(n)
```

Description

`f = factorial(n)` returns the product of all positive integers less than or equal to `n`, where `n` is a nonnegative integer value. If `n` is an array, then `f` contains the factorial of each value of `n`. The data type and size of `f` is the same as that of `n`.

The factorial of `n` is commonly written in math notation using the exclamation point character as *n!*. Note that `n!` is not a valid MATLAB syntax for calculating the factorial of `n`.

Examples

10!

```
f = factorial(10)
```

```
f = 3628800
```

22!

```
format long
f = factorial(22)
```

```
f =
     1.124000727777608e+21
```

In this case, `f` is accurate up to 15 digits, `1.12400072777760e+21`, because double-precision numbers are only accurate up to 15 digits.

Reset the output format to the default.

```
format
```

Factorial of Array Elements

```
n = [0 1 2; 3 4 5];
f = factorial(n)
```

```
f =

     1     1     2
     6    24   120
```

Factorial of Unsigned Integer Values

```
n = uint64([5 10 15 20]);
f = factorial(n)
```

```
f = 1×4 uint64 row vector

                   120                 3628800          1307674368000    24329020081766400
```

Input Arguments

n — Input values
scalar, vector, or array of real, nonnegative integer values

Input values, specified as a scalar, vector, or array of real, nonnegative integers.

Example: `5`

Example: `[0 1 2 3 4]`

Example: `int16([10 15 20])`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Tips

Limitations

- For double-precision inputs, the result is exact when `n` is less than or equal to `21`. Larger values of `n` produce a result that has the correct order of magnitude and is accurate for the first 15 digits. This is because double-precision numbers are only accurate up to 15 digits.
- For single-precision inputs, the result is exact when `n` is less than or equal to `13`. Larger values of `n` produce a result that has the correct order of magnitude and is accurate for the first 8 digits. This is because single-precision numbers are only accurate up to 8 digits.

Saturation

- The table below describes the saturation behavior of each data type when used with the `factorial` function. The values in the last column indicate the saturation point; that is, the first positive integer whose actual factorial is larger than the maximum representable value in the middle column. For `single` and `double`, all values larger than the maximum value are returned as `Inf`. For the integer data types, the saturation value is equal to the maximum value in the middle column.

Data type	Maximum Value	Factorial Saturation Threshold
`double`	`realmax`	`factorial(171)`
`single`	`realmax('single')`	`factorial(single(35))`
`uint64`	2^{64}-1	`factorial(uint64(21))`
`int64`	2^{63}-1	`factorial(int64(21))`
`uint32`	2^{32}-1	`factorial(uint32(13))`
`int32`	2^{31}-1	`factorial(int32(13))`
`uint16`	2^{16}-1	`factorial(uint16(9))`
`int16`	2^{15}-1	`factorial(int16(8))`
`uint8`	2^{8}-1	`factorial(uint8(6))`
`int8`	2^{7}-1	`factorial(int8(6))`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`prod`

Introduced before R2006a

false

Logical 0 (false)

Syntax

```
false
F = false(n)
F = false(sz)
F = false(sz1,...,szN)
F = false( ___ ,'like',p)
```

Description

`false` is shorthand for the logical value `0`.

`F = false(n)` is an `n`-by-`n` array of logical zeros.

`F = false(sz)` is an array of logical zeros where the size vector, `sz`, defines `size(F)`. For example, `false([2 3])` returns a 2-by-3 array of logical zeros.

`F = false(sz1,...,szN)` is a `sz1`-by-`...`-by-`szN` array of logical zeros where `sz1,...,szN` indicates the size of each dimension. For example, `false(2,3)` returns a 2-by-3 array of logical zeros.

`F = false( ___ ,'like',p)` returns an array of logical zeros of the same sparsity as the logical variable `p` using any of the previous size syntaxes.

Examples

Generate Square Matrix of Logical Zeros

Use `false` to generate a 3-by-3 square matrix of logical zeros.

```
A = false(3)
```

```
A = 3×3 logical array
```

```
   0   0   0
   0   0   0
   0   0   0
```

```
class(A)
```

```
ans =
'logical'
```

The result is of class `logical`.

Generate Array of Logical Zeros with Arbitrary Dimensions

Use `false` to generate a 3-by-2-by-2 array of logical zeros.

```
false(3,2,2)
```

```
ans = 3×2×2 logical array

(:,:,1) =

   0   0
   0   0
   0   0


(:,:,2) =

   0   0
   0   0
   0   0
```

Alternatively, use a size vector to specify the size of the matrix.

```
false([3 2 2])
```

```
ans = 3×2×2 logical array

(:,:,1) =

   0   0
   0   0
   0   0
```

```
(:,:,2) =

   0   0
   0   0
   0   0
```

Note that specifying multiple vector inputs returns an error.

Execute Logic Statement

`false` along with `true` can be used to execute logic statements.

Test the logical statement

```
~(A and B) = (~A) or (~B)
```

for `A = false` and `B = true`.

```
~(false & true) == (~false) | (~true)
```

```
ans = logical
   1
```

The result is logical 1 (true), since the logical statements on both sides of the equation are equivalent. This logical statement is an instance of De Morgan's Law.

Generate Logical Array of Selected Sparsity

Generate a logical array of the same data type and sparsity as the selected array.

```
A = logical(sparse(5,3));
whos A
```

```
  Name      Size            Bytes  Class     Attributes

  A         5x3                41  logical   sparse
```

```
F = false(4,'like',A);
whos F
```

```
  Name      Size            Bytes  Class     Attributes

  F         4x4                49  logical   sparse
```

The output array F has the same sparse attribute as the specified array A.

Input Arguments

n — Size of square matrix

integer

Size of square matrix, specified as an integer. n sets the output array size to n-by-n. For example, false(3) returns a 3-by-3 array of logical zeros.

- If n is 0, then F is an empty matrix.
- If n is negative, then it is treated as 0.

Data Types: int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

sz — Size vector

row vector of integers

Size vector, specified as a row vector of integers. For example, false([2 3)] returns a 2-by-3 array of logical zeros.

- If the size of any dimension is 0, then F is an empty array.
- If the size of any dimension is negative, then it is treated as 0.
- If any trailing dimensions greater than 2 have a size of 1, then the output, F, does not include those dimensions.

Data Types: int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

sz1,...,szN — Size inputs

comma-separated list of integers

Size inputs, specified by a comma-separated list of integers. For example, false(2,3) returns a 2-by-3 array of logical zeros.

- If the size of any dimension is 0, then F is an empty array.

- If the size of any dimension is negative, then it is treated as 0.
- If any trailing dimensions greater than 2 have a size of 1, then the output, F, does not include those dimensions.

Data Types: `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

p — Prototype
logical variable

Prototype, specified as a logical variable.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

F — Output of logical zeros
scalar | vector | matrix | N-D array

Output of logical zeros, returned as a scalar, vector, matrix, or N-D array.

Data Types: `logical`

Tips

- `false(n)` is much faster and more memory efficient than `logical(zeros(n))`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Dimensions must be real, nonnegative, integers.

See Also

See Also

`logical` | `true`

Topics

"Class Support for Array-Creation Functions"

Introduced before R2006a

fclose

Close one or all open files

Syntax

```
fclose(fileID)
fclose('all')
status = fclose(...)
```

Description

`fclose(fileID)` closes an open file. *`fileID`* is an integer file identifier obtained from `fopen`.

`fclose('all')` closes all open files. Specify the literal `all` as a character vector or a string scalar.

`status` `= fclose(...)` returns a *`status`* of `0` when the close operation is successful. Otherwise, it returns `-1`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`ferror` | `fopen` | `frewind` | `fread` | `fwrite` | `fseek` | `ftell` | `feof` | `fscanf` | `fprintf`

Introduced before R2006a

fclose (serial)

Disconnect serial port object from device

Syntax

```
fclose(obj)
```

Description

`fclose(obj)` disconnects `obj` from the device, where `obj` is a serial port object or an array of serial port objects.

Examples

This example creates the serial port object `s` on a Windows platform, connects `s` to the device, writes and reads text data, and then disconnects `s` from the device using `fclose`.

```
s = serial('COM1');
fopen(s)
fprintf(s, '*IDN?')
idn = fscanf(s);
fclose(s)
```

At this point, the device is available to be connected to a serial port object. If you no longer need `s`, you should remove from memory with the `delete` function, and remove it from the workspace with the `clear` command.

Tips

If `obj` was successfully disconnected, then the `Status` property is configured to `closed` and the `RecordStatus` property is configured to `off`. You can reconnect `obj` to the device using the `fopen` function.

An error is returned if you issue `fclose` while data is being written asynchronously. In this case, you should abort the write operation with the `stopasync` function, or wait for the write operation to complete.

See Also

`clear` | `fopen` | `stopasync` | `delete` | `RecordStatus` | `Status`

Introduced before R2006a

fcontour

Plot contours

Syntax

```
fcontour(f)
fcontour(f,xyinterval)

fcontour( ___ ,LineSpec)
fcontour( ___ ,Name,Value)
fcontour(ax, ___ )
fc = fcontour( ___ )
```

Description

`fcontour(f)` plots the contour lines of the function `z = f(x,y)` for constant levels of `z` over the default interval `[-5 5]` for `x` and `y`.

`fcontour(f,xyinterval)` plots over the specified interval. To use the same interval for both `x` and `y`, specify `xyinterval` as a two-element vector of the form `[min max]`. To use different intervals, specify a four-element vector of the form `[xmin xmax ymin ymax]`.

`fcontour( ___ ,LineSpec)` sets the line style and color for the contour lines. For example, `'-r'` specifies red lines. Use this option after any of the previous input argument combinations.

`fcontour( ___ ,Name,Value)` specifies line properties using one or more name-value pair arguments.

`fcontour(ax, ___ )` plots into the axes specified by `ax` instead of the current axes.

`fc = fcontour( ___ )` returns a `FunctionContour` object. Use `fc` to query and modify properties of a specific `FunctionContour` object. For a list of properties, see FunctionContour Properties.

Examples

Plot Contours of Function

Plot the contours of $f(x, y) = \sin(x) + \cos(y)$ over the default interval of $-5 < x < 5$ and $-5 < y < 5$.

```
f = @(x,y) sin(x) + cos(y);
fcontour(f)
```

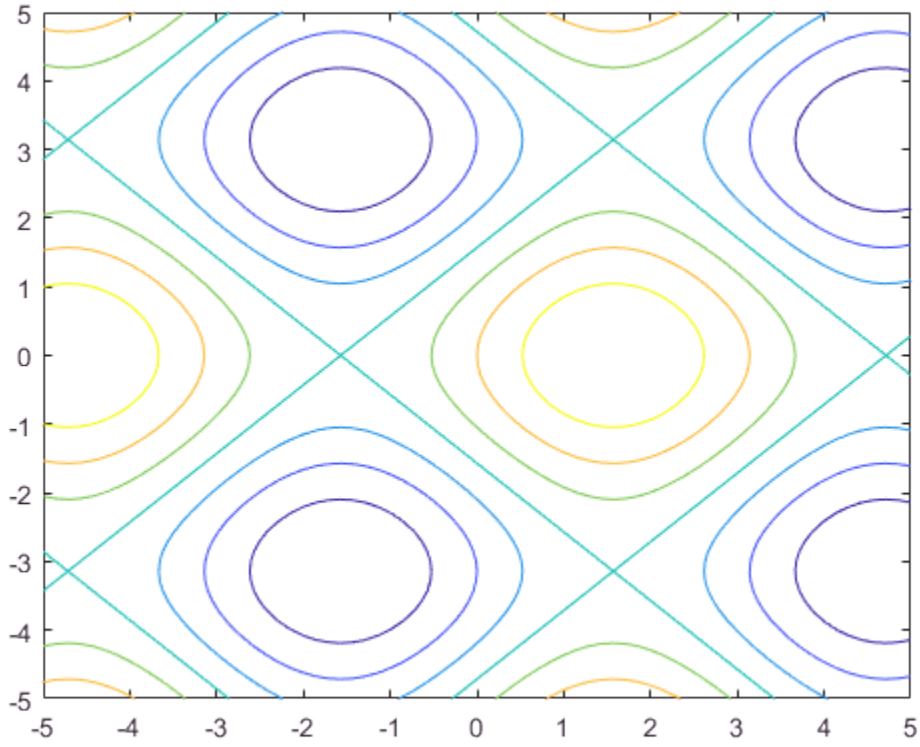

Specify Plotting Interval and Plot Piecewise Contour Plot

Specify the plotting interval as the second argument of `fcontour`. When you plot multiple inputs over different intervals in the same axes, the axis limits adjust to display all the data. This behavior lets you plot piecewise inputs.

Plot the piecewise input

$$\begin{array}{ll} \mathrm{erf}(x) + \cos(y) & -5 < x < 0 \\ \sin(x) + \cos(y) & 0 < x < 5 \end{array}$$

over $-5 < y < 5$.

```
fcontour(@(x,y) erf(x) + cos(y),[-5 0 -5 5])
hold on
fcontour(@(x,y) sin(x) + cos(y),[0 5 -5 5])
hold off
grid on
```

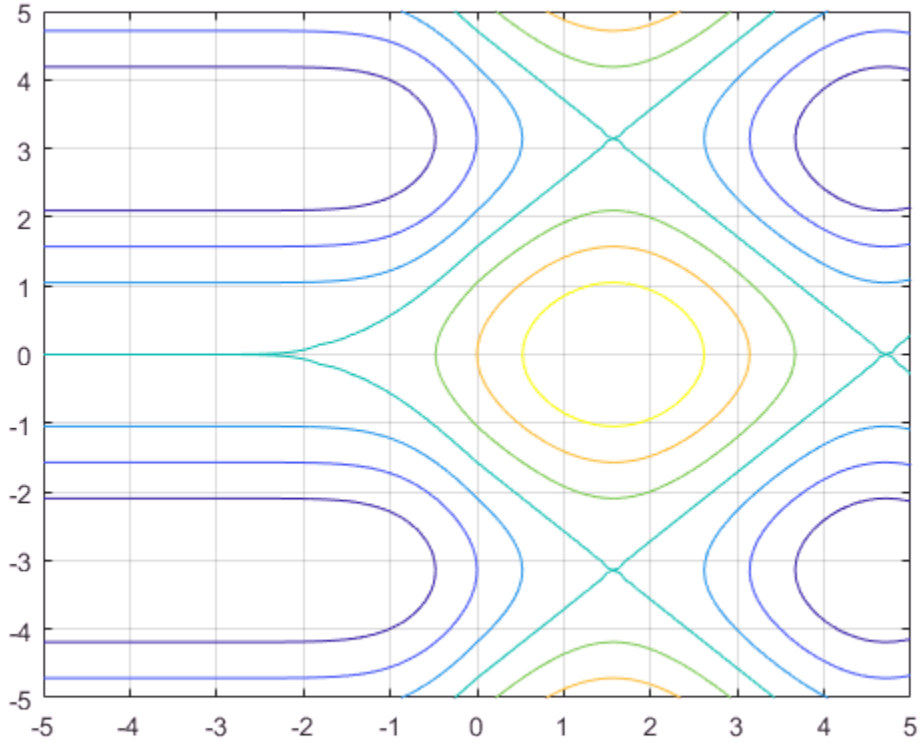

Change Line Style and Width

Plot the contours of $x^2 - y^2$ as dashed lines with a line width of 2.

```
f = @(x,y) x.^2 - y.^2;
fcontour(f,'--','LineWidth',2)
```

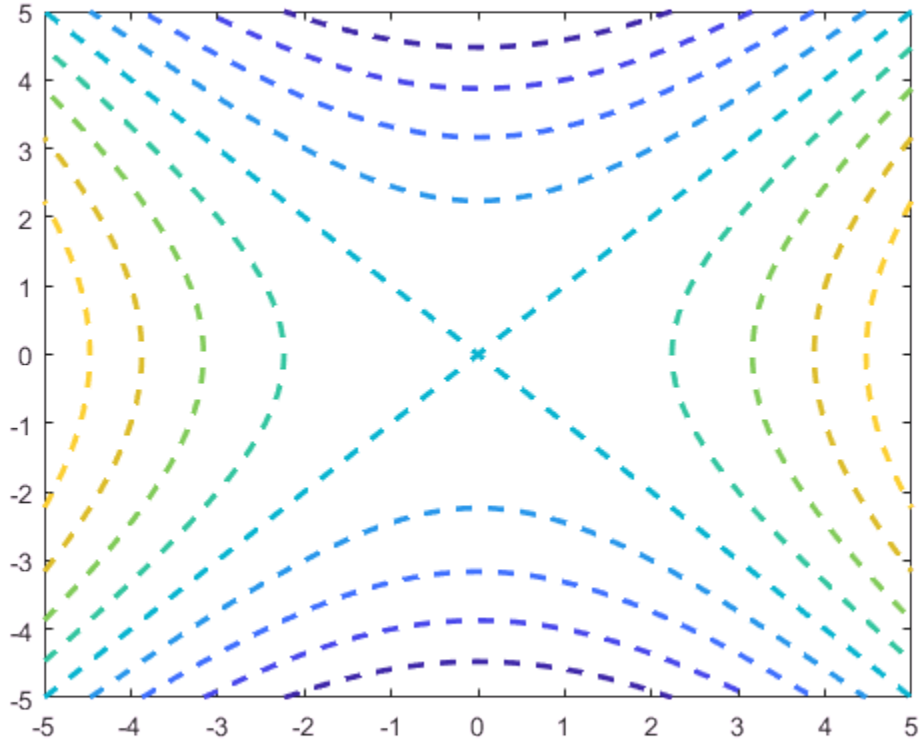

Plot Multiple Contour Plots

Plot $\sin(x) + \cos(y)$ and $x - y$ on the same axes by using `hold on`.

```
fcontour(@(x,y) sin(x)+cos(y))
hold on
fcontour(@(x,y) x-y)
hold off
```

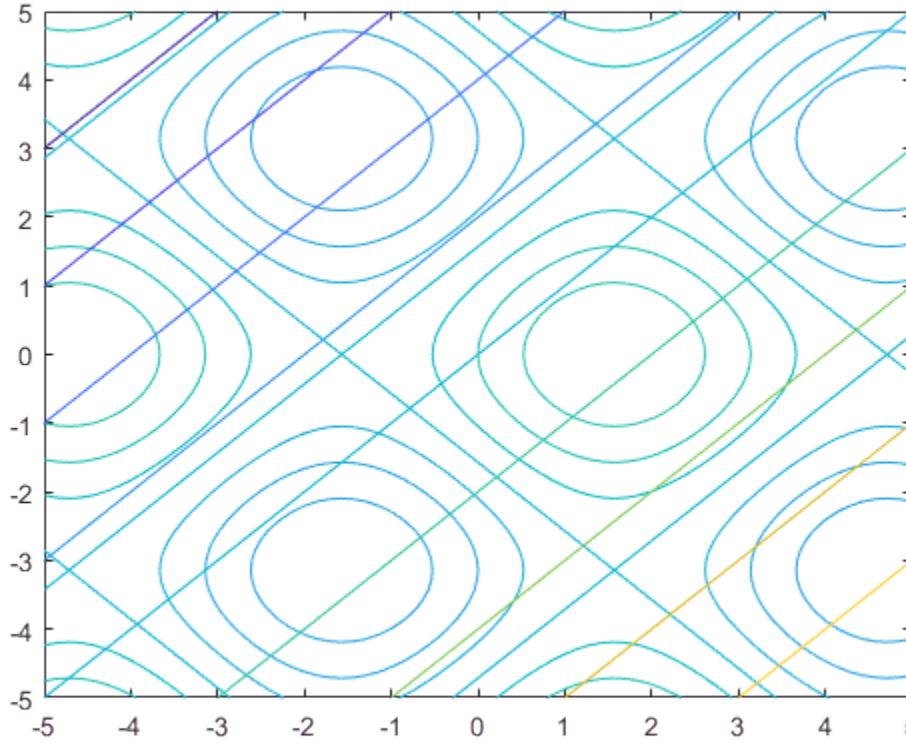

Modify Contour Plot After Creation

Plot the contours of $e^{-(x/3)^2-(y/3)^2} + e^{-(x+2)^2-(y+2)^2}$. Assign the function contour object to a variable.

```
f = @(x,y) exp(-(x/3).^2-(y/3).^2) + exp(-(x+2).^2-(y+2).^2);
fc = fcontour(f)
```

```
fc =
  FunctionContour with properties:
```

```
   Function: @(x,y)exp(-(x/3).^2-(y/3).^2)+exp(-(x+2).^2-(y+2).^2)
  LineColor: 'flat'
  LineStyle: '-'
  LineWidth: 0.5000
       Fill: 'off'
  LevelList: [0.2000 0.4000 0.6000 0.8000 1 1.2000 1.4000]

Show all properties
```

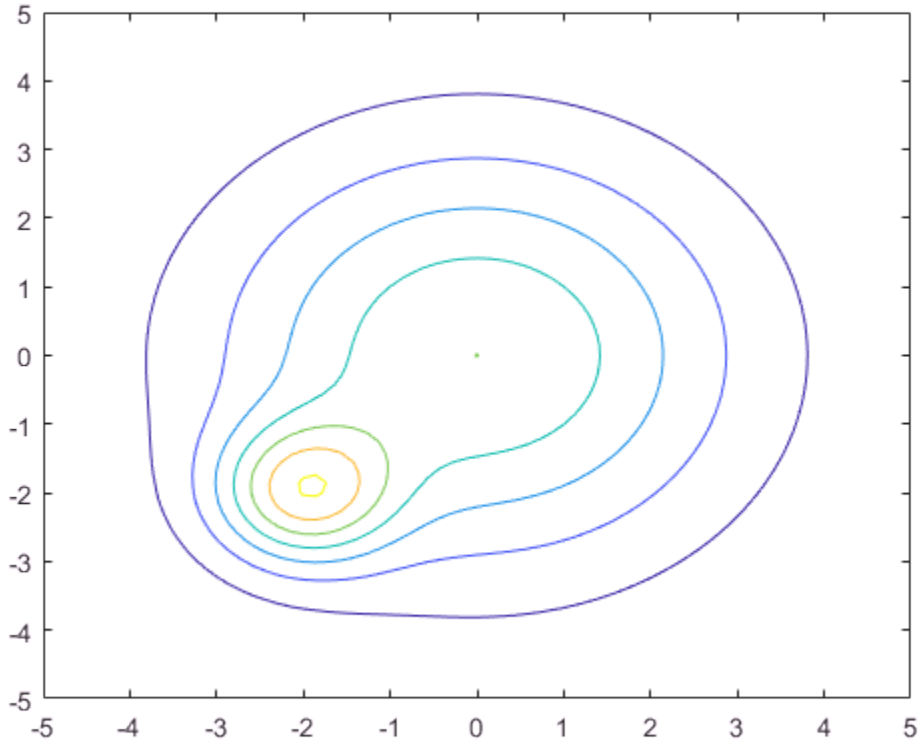

Change the line width to `1` and the line style to a dashed line by using dot notation to set properties of the function contour object. Show contours close to `0` and `1` by setting the `LevelList` property. Add a colorbar.

```
fc.LineWidth = 1;
fc.LineStyle = '--';
fc.LevelList = [1 0.9 0.8 0.2 0.1];
colorbar
```

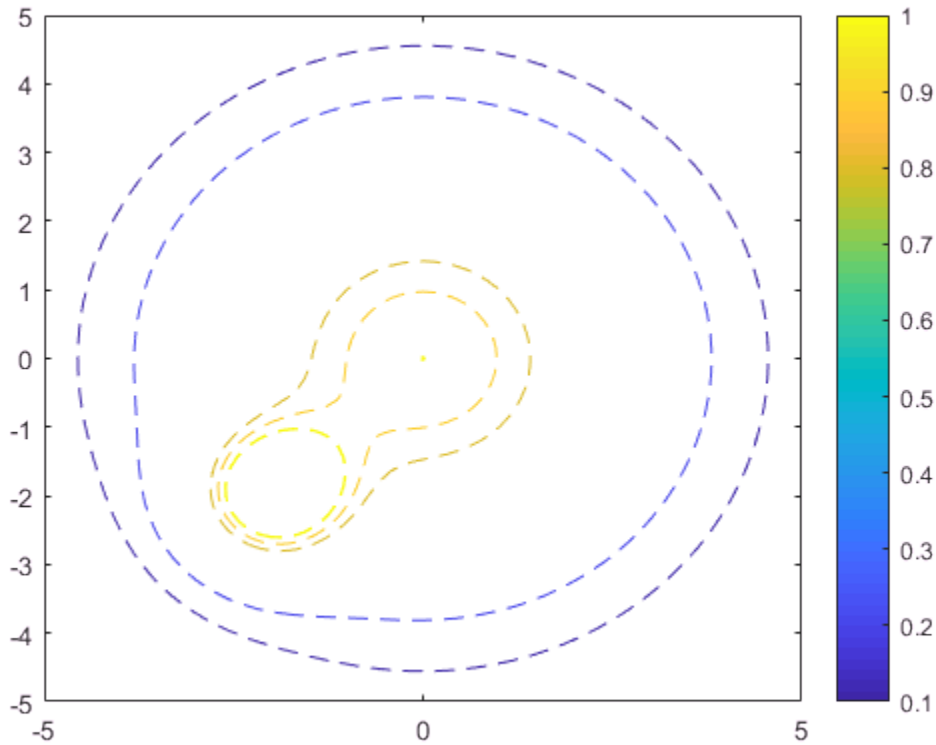

Fill Area Between Contours

Create a plot that looks like a sunset by filling the area between the contours of

$$\mathrm{erf}((y+2)^3) - e^{(-0.65((x-2)^2+(y-2)^2))}.$$

```
f = @(x,y) erf((y+2).^3) - exp(-0.65*((x-2).^2+(y-2).^2));
fcontour(f,'Fill','on');
```

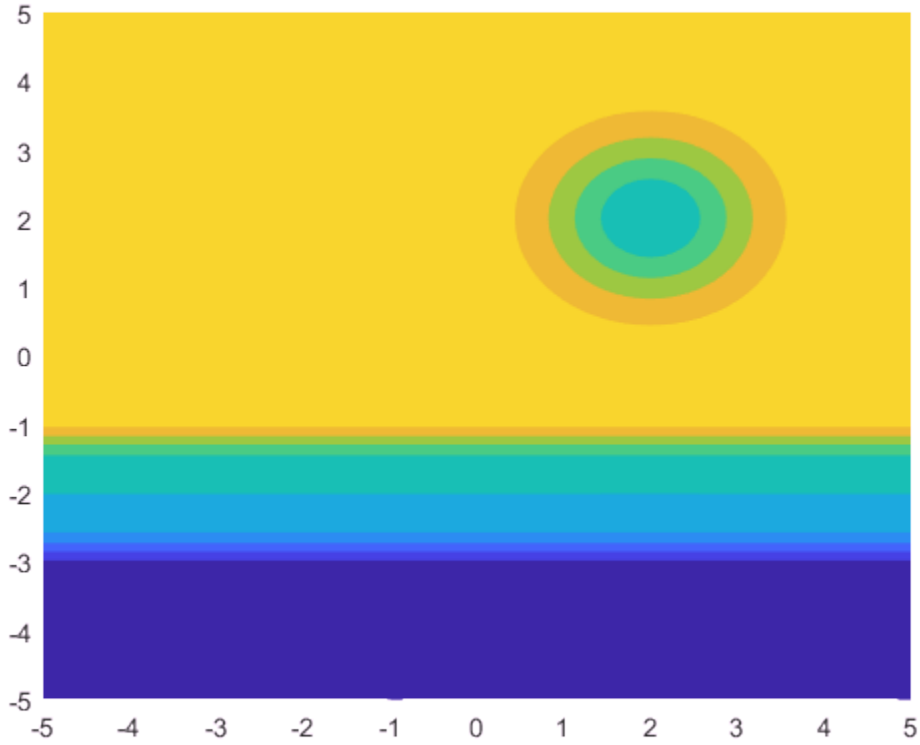

If you want interpolated shading instead, use the `fsurf` function and set its `'EdgeColor'` option to `'none'` followed by the command `view(0,90)`.

Specify Levels for Contour Lines

Set the values at which `fcontour` draws contours by using the `'LevelList'` option.

```
f = @(x,y) sin(x) + cos(y);
fcontour(f,'LevelList',[-1 0 1])
```

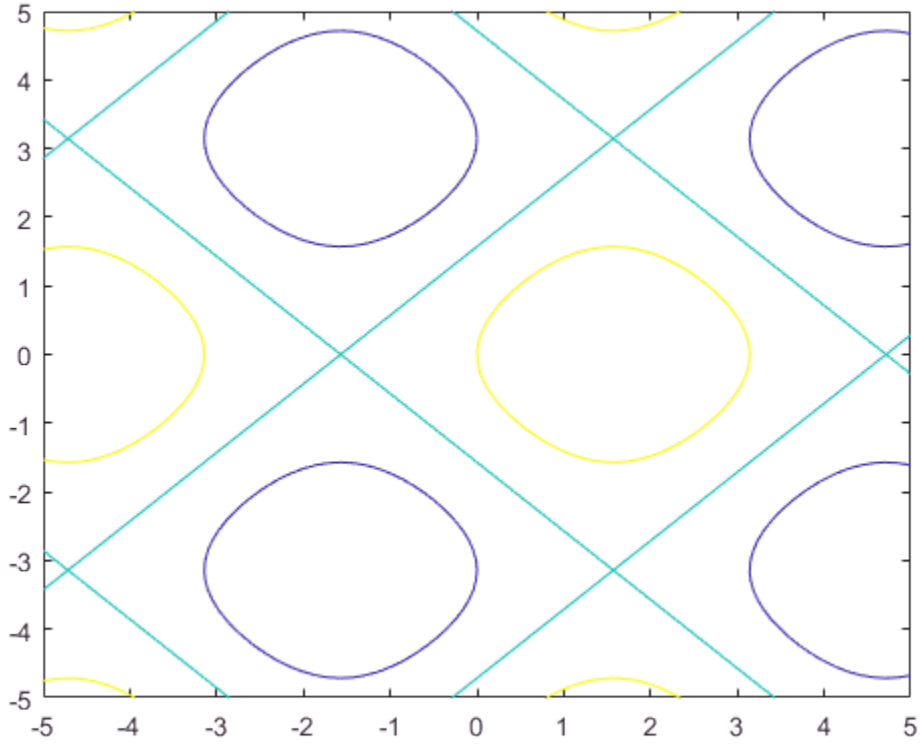

Control Resolution of Contour Lines

Control the resolution of contour lines by using the `'MeshDensity'` option. Increasing `'MeshDensity'` can make smoother, more accurate plots, while decreasing it can increase plotting speed.

Divide a figure into two using `subplot`. In the first subplot, plot the contours of $\sin(x)\sin(y)$. The corners of the squares do not meet. To fix this issue, increase `'MeshDensity'` to `200` in the second subplot. The corners now meet, showing that by increasing `'MeshDensity'` you increase the resolution.

```
f = @(x,y) sin(x).*sin(y);
```

```
subplot(2,1,1)
fcontour(f)
title('Default Mesh Density (71)')

subplot(2,1,2)
fcontour(f,'MeshDensity',200)
title('Custom Mesh Density (200)')
```

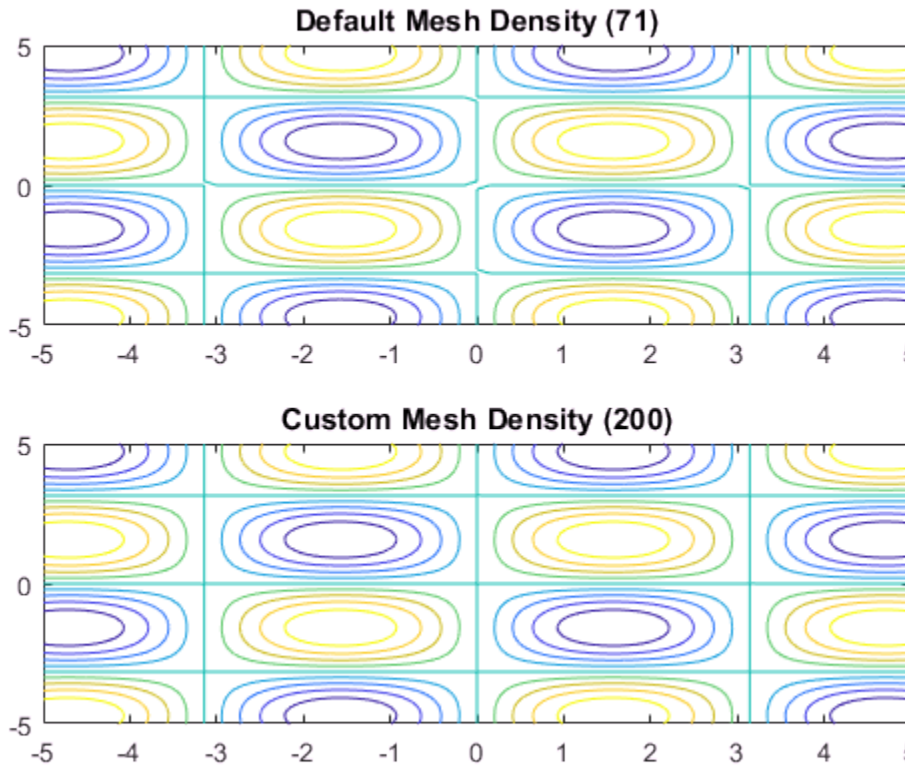

Add Title and Axis Labels and Format Ticks

Plot $x\sin(y) - y\cos(x)$. Display the grid lines, add a title, and add axis labels.

```
fcontour(@(x,y) x.*sin(y) - y.*cos(x), [-2*pi 2*pi], 'LineWidth', 2);
```

```
grid on
title({'xsin(y) - ycos(x)','-2\pi < x < 2\pi and -2\pi < y < 2\pi'})
xlabel('x')
ylabel('y')
```

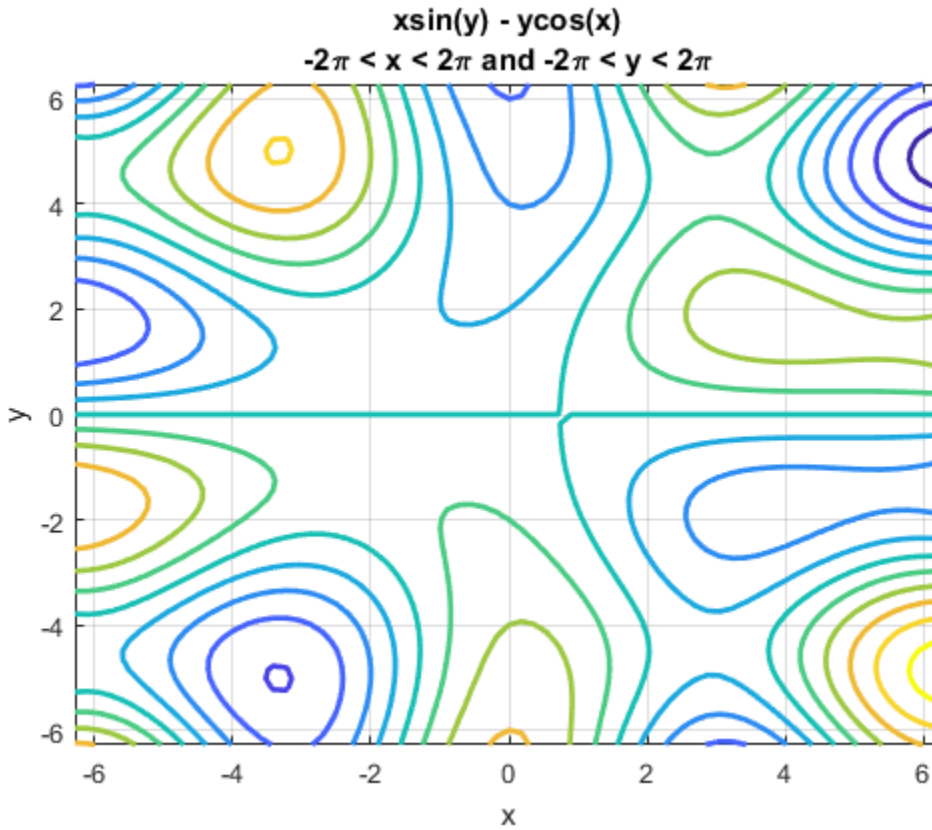

Set the x-axis tick values and associated labels by setting the `XTickLabel` and `XTick` properties of the axes object. Access the axes object using `gca`. Similarly, set the y-axis tick values and associated labels.

```
ax = gca;
ax.XTick = ax.XLim(1):pi/2:ax.XLim(2);
ax.XTickLabel = {'-2\pi','-3\pi/2','-\pi','-\pi/2','0','\pi/2','\pi','3\pi/2','2\pi'};
ax.YTick = ax.YLim(1):pi/2:ax.YLim(2);
ax.YTickLabel = {'-2\pi','-3\pi/2','-\pi','-\pi/2','0','\pi/2','\pi','3\pi/2','2\pi'};
```

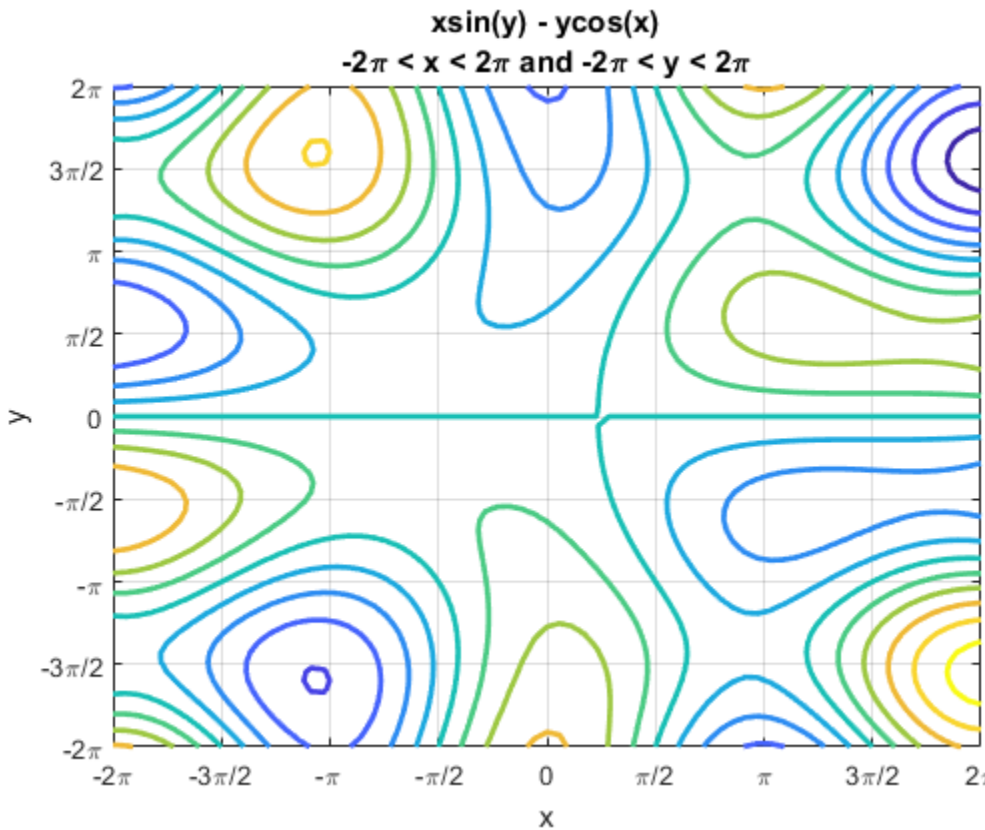

Input Arguments

`f` — Function to plot

function handle

Function to plot, specified as a function handle to a named or anonymous function.

Specify a function of the form `z = f(x,y)`. The function must accept two matrix input arguments and return a matrix output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `f = @(x,y) sin(x) + cos(y);`

`xyinterval` — Plotting interval for `x` and `y`

`[-5 5 -5 5]` (default) | vector of form `[min max]` | vector of form `[xmin xmax ymin ymax]`

Plotting interval for `x` and `y`, specified in one of these forms:

- Vector of form `[min max]` — Use the interval `[min max]` for both `x` and `y`.
- Vector of form `[xmin xmax ymin ymax]` — Use the interval `[xmin xmax]` for `x` and `[ymin ymax]` for `y`.

`ax` — Axes object

axes object

Axes object. If you do not specify an axes object, then the `fcontour` uses the current axes.

`LineSpec` — Line style and color

character vector

Line style and color, specified as a character vector containing a line style specifier, a color specifier, or both.

Example: `'--r'` specifies red dashed lines

These two tables list the line style and color options.

Line Style Specifier	Description
`-`	Solid line (default)
`--`	Dashed line
`:`	Dotted line
`-.`	Dash-dot line

Color Specifier	Description
`y`	yellow
`m`	magenta
`c`	cyan
`r`	red

Color Specifier	Description
g	green
b	blue
w	white
k	black

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'MeshDensity',30`

The properties listed here are only a subset. For a full list, see FunctionContour Properties.

`'MeshDensity'` — Number of evaluation points per direction

71 (default) | number

Number of evaluation points per direction, specified as a number. The default is `71`. Because `fcontour` uses adaptive evaluation, the actual number of evaluation points is greater.

Example: `30`

`'Fill'` — Fill between contour lines

`'off'` (default) | `'on'`

Fill between contour lines, specified as one of these values:

- `'off'` — Do not fill the spaces between contour lines with a color.
- `'on'` — Fill the spaces between contour lines with color.

`'LevelList'` — Contour levels

vector of z values

Contour levels, specified as a vector of z values. By default, the `fcontour` function chooses values that span the range of values in the `ZData` property.

Setting this property sets the associated mode property to manual.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'LevelStep'` — Spacing between contour lines

`0` (default) | scalar numeric value

Spacing between contour lines, specified as a scalar numeric value. For example, specify a value of `2` to draw contour lines at increments of 2. By default, `LevelStep` is determined by using the `ZData` values.

Setting this property sets the associated mode property to `'manual'`.

Example: `3.4`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'LineColor'` — Color of contour lines

`'flat'` (default) | `'none'` | RGB triplet | character vector

Color of contour lines, specified as one of these values:

- `'flat'` — Use a different color for each contour line, determined by its contour value, the colormap, and the scaling of data values into the colormap. For more information on color scaling, see `caxis`.
- `'none'` — Do not draw the contour lines.
- RGB triplet or character vector of a color name — Use the same color for all contour lines.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`

Long Name	Short Name	RGB Triplet
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`'LineWidth'` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

Output Arguments

`fc` — One or more `FunctionContour` objects
scalar | vector

One or more `FunctionContour` objects, returned as a scalar or a vector. You can use these objects to query and modify the properties of a specific contour plot. For a list of properties, see FunctionContour Properties.

See Also

See Also

Functions
`fmesh` | `fplot` | `fplot3` | `fsurf` | `title`

Properties
FunctionContour Properties

Introduced in R2016a

feather

Plot velocity vectors



Syntax

```
feather(U,V)
feather(Z)
feather(...,LineSpec)
feather(axes_handle,...)
h = feather(...)
```

Description

A feather plot displays vectors emanating from equally spaced points along a horizontal axis. You express the vector components relative to the origin of the respective vector.

`feather(U,V)` displays the vectors specified by `U` and `V`, where `U` contains the x components as relative coordinates, and `V` contains the y components as relative coordinates.

`feather(Z)` displays the vectors specified by the complex numbers in `Z`. This is equivalent to `feather(real(Z),imag(Z))`.

`feather(...,LineSpec)` draws a feather plot using the line type, marker symbol, and color specified by `LineSpec`.

`feather(axes_handle,...)` plots into the axes with the handle `axes_handle` instead of into the current axes (`gca`).

`h = feather(...)` returns the handles to line objects in `h`.

Examples

Create Feather Plot

Define `theta` as values between -2π and 2π. Define `r` as a vector the same size as `theta`.

```
theta = -pi/2:pi/16:pi/2;
r = 2*ones(size(theta));
```

Create a feather plot showing the direction of `theta`. Since `feather` uses Cartesian coordinates, convert `theta` and `r` to Cartesian coordinates using `pol2cart`.

```
[u,v] = pol2cart(theta,r);
feather(u,v)
```

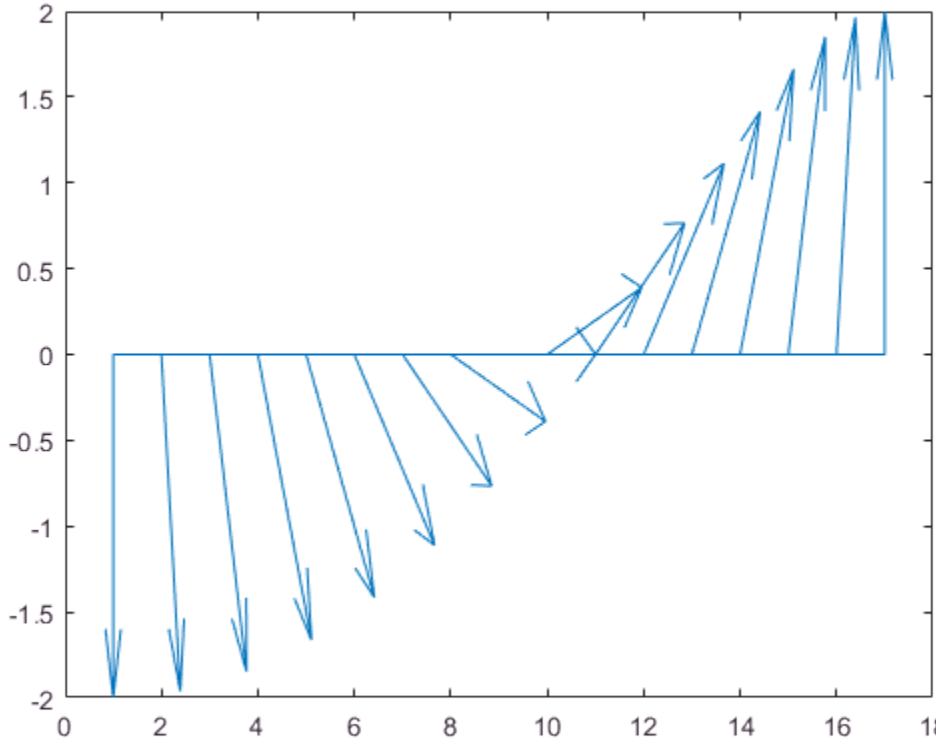

See Also

`compass` | `rose` | `LineSpec`

Introduced before R2006a

featureEdges

Class: TriRep

(Not recommended) Sharp edges of surface triangulation

Note: `featureEdges(TriRep)` is not recommended. Use featureEdges(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
FE = featureEdges(TR, filterangle)
```

Description

`FE = featureEdges(TR, filterangle)` returns an edge matrix `FE`. This method is typically used to extract the sharp edges in the surface mesh for the purpose of display. Edges that are shared by only one triangle and edges that are shared by more than two triangles are considered to be feature edges by default.

Note: This query is only applicable to triangular surface meshes.

Input Arguments

`TR`	Triangulation representation.
`filterangle`	The threshold angle in radians. Must be in the range $(0, \pi)$. `featureEdges` will return adjacent triangles that have a dihedral angle that deviates from π by an angle greater than `filterangle`.

Output Arguments

FE	Edges of the triangulation. FE is of size m-by-2 where m is the number of computed feature edges in the mesh. The vertices of the edges index into the array of points representing the vertex coordinates, TR.X.

Examples

Create a surface triangulation:

```
x = [0 0 0 0 0 3 3 3 3 3 3 6 6 6 6 6 9 9 9 9 9 9]';
y = [0 2 4 6 8 0 1 3 5 7 8 0 2 4 6 8 0 1 3 5 7 8]';
dt = DelaunayTri(x,y);
tri = dt(:,:);
```

Elevate the 2-D mesh to create a surface:

```
z = [0 0 0 0 0 2 2 2 2 2 2 0 0 0 0 0 0 0 0 0 0 0]';
subplot(1,2,1);
trisurf(tri,x,y,z, 'FaceColor', 'cyan');
axis equal;
% TRISURF display of surface mesh
% showing mesh edges
```

Compute the feature edges using a filter angle of pi/6:

```
tr = TriRep(tri, x,y,z);
fe = featureEdges(tr,pi/6)';
subplot(1,2,2);
trisurf(tr, 'FaceColor', 'cyan', 'EdgeColor','none', ...
     'FaceAlpha', 0.8); axis equal;
```

Add the feature edges to the plot:

```
hold on;
plot3(x(fe), y(fe), z(fe), 'k', 'LineWidth',1.5);
hold off;
% TRISURF display of surface mesh
% suppressing mesh edges
% and showing feature edges
```

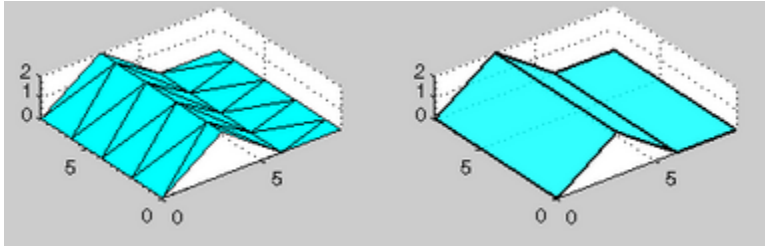

See Also

delaunayTriangulation | edges | triangulation

feof

Test for end-of-file

Syntax

status = feof(*fileID*)

Description

status = feof(*fileID*) returns 1 if a previous operation set the end-of-file indicator for the specified file. Otherwise, feof returns 0. *fileID* is an integer file identifier obtained from fopen.

Opening an empty file does *not* set the end-of-file indicator. Read operations, and the fseek and frewind functions, move the file position indicator.

Examples

Read bench.dat, which contains MATLAB benchmark data, one character at a time:

```
fid = fopen('bench.dat');

k = 0;
while ~feof(fid)
    curr = fscanf(fid,'%c',1);
    if ~isempty(curr)
       k = k+1;
       benchstr(k) = curr;
    end
end

fclose(fid);
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`fclose` | `ferror` | `fopen` | `frewind` | `fseek` | `ftell`

Topics

"Testing for End of File (EOF)"

Introduced before R2006a

ferror

Information about file I/O errors

Syntax

```
message = ferror(fileID)
[message, errnum] = ferror(fileID)
[...] = ferror(fileID, 'clear')
```

Description

`message = ferror(fileID)` returns the error message for the most recent file I/O operation on the specified file. `message` is an empty character vector when the most recent I/O operation is successful or when you clear it manually. `fileID` is an integer file identifier obtained from `fopen`, or an identifier reserved for standard input (`0`), standard output (`1`), or standard error (`2`).

`[message, errnum] = ferror(fileID)` returns the error number. If the most recent file I/O operation was successful, `errnum` is `0`. A nonzero `errnum` indicates that an error occurred. Negative values correspond to MATLAB error messages. Positive values correspond to C library error messages for your system.

`[...] = ferror(fileID, 'clear')` clears the error indicator for the specified file. Specify the literal `clear` as a character vector or a string scalar. When you clear the error indicator, succeeding calls to `ferror` behave as if the most recent I/O operation was successful.

See Also

`fclose` | `fopen` | `fseek` | `ftell` | `feof` | `fscanf` | `fprintf` | `fread` | `fwrite`

Introduced before R2006a

feval

Evaluate function

Syntax

```
[y1,...,yN] = feval(fun,x1,...,xM)
```

Description

`[y1,...,yN] = feval(fun,x1,...,xM)` evaluates a function using its name or its handle, and using the input arguments `x1,...,xM`.

The `feval` function follows same scoping and precedence rules as calling a function handle directly. For more information, see “Create Function Handle”.

Examples

Evaluate Function with Function Name as Character Vector

Round the value of `pi` to the nearest integer using the name of the function.

```
fun = 'round';
x1 = pi;
y = feval(fun,x1)
```

```
y = 3
```

Round the value of `pi` to two digits to the right of the decimal point.

```
x2 = 2;
y = feval(fun,x1,x2)
```

```
y = 3.1400
```

Input Arguments

`fun` — Function to evaluate

function name | function handle

Function to evaluate, specified as a function name or a handle to a function. The function accepts `M` input arguments, and returns `N` output arguments. To specify `fun` as a function name, do not include path information.

Invoking `feval` with a function handle is equivalent to invoking the function handle directly.

Example: `fun = 'cos'`

Example: `fun = @sin`

`x1,...,xM` — Inputs to evaluated function

depends on function

Inputs to the evaluated function. The types of the inputs depend on the function, `fun`.

Output Arguments

`y1,...,yN` — Outputs from evaluated function

depends on function

Outputs from evaluated function. The types of the outputs depend on the function, `fun`.

Tips

- If you have a function handle, it is not necessary to use `feval` because you can invoke the function handle directly. The results of the following statements are equivalent.

  ```
  fh = @eig;
  [V,D] = fh(A)
  ```

  ```
  [V,D] = feval(@eig,A)
  ```

- To evaluate a nested or local function using `feval`, use a function handle instead of the function name. For more information, see “Call Local Functions Using Function Handles”.

See Also

See Also

`assignin` | `builtin` | `eval` | `evalin` | `functions`

Topics

"Create Function Handle"

Introduced before R2006a

fewerbins

Decrease number of histogram bins

Syntax

```
N = fewerbins(h)
N = fewerbins(h,direction)
```

Description

`N = fewerbins(h)` decreases the number of bins in histogram `h` by 10% (rounded down to the nearest integer) and returns the new number of bins.

For bivariate histograms, this decreases the bin count in both the *x* and *y* directions.

`N = fewerbins(h,direction)`, where `h` must be a `histogram2` object, only decreases the number of bins in the dimension specified by `direction`. The `direction` option can be `'x'`, `'y'`, or `'both'`. The default value is `'both'`.

Examples

Decrease Number of Histogram Bins

Plot a histogram of 1,000 random numbers and return a handle to the histogram object.

```
x = randn(1000,1);
h = histogram(x)
```

```
h = 
  Histogram with properties:

             Data: [1000×1 double]
           Values: [3 1 2 15 17 27 53 79 85 101 127 110 124 95 67 32 27 16 6 6 4 1 2]
          NumBins: 23
         BinEdges: [-3.3000 -3.0000 -2.7000 -2.4000 -2.1000 -1.8000 -1.5000 -1.2000 -0
         BinWidth: 0.3000
```

```
        BinLimits: [-3.3000 3.6000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0 0 0]

  Show all properties
```

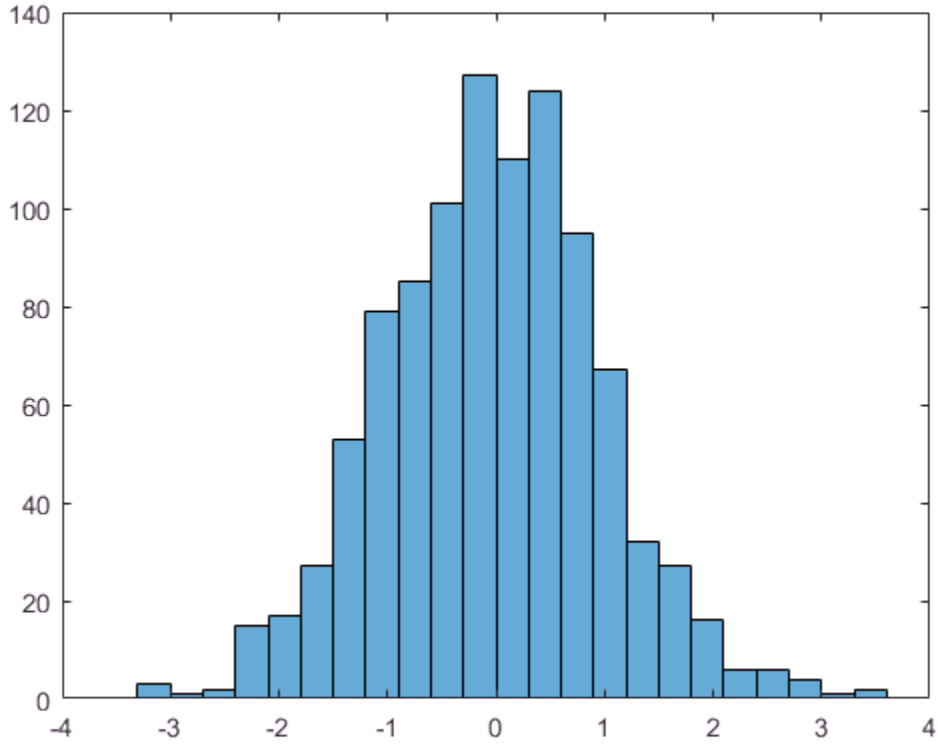

Use `fewerbins` to decrease the number of bins in the histogram.

```
fewerbins(h);
fewerbins(h)
```

```
ans = 18
```

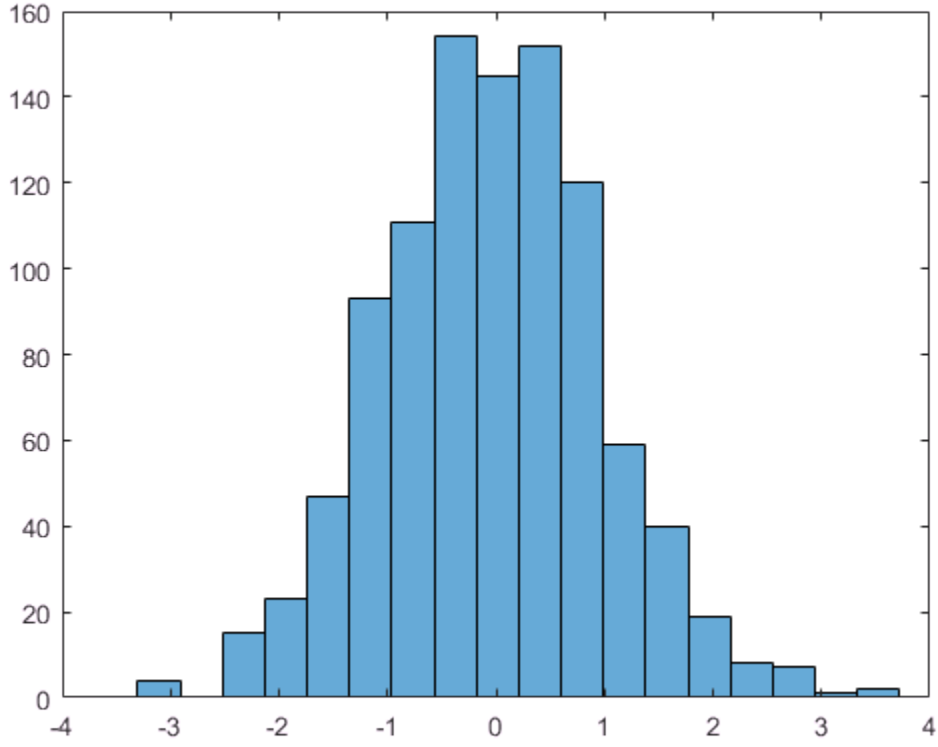

Input Arguments

h — Input histogram

`histogram` object | `histogram2` object

Input histogram, specified as a `histogram` or `histogram2` object. For more information, see histogram or histogram2.

`h` cannot be a categorical histogram.

`direction` — Direction to decrease number of bins

`'both'` (default) | `'x'` | `'y'`

Direction to decrease the number of bins, specified as `'x'`, `'y'`, or `'both'`. Specify `'x'` or `'y'` to only decrease the number of bins in that direction while leaving the number of bins in the other direction constant.

Output Arguments

`N` — Number of bins

scalar | vector

Number of bins, returned as a scalar or vector. `N` is the new number of bins for the histogram after increase. For bivariate histogram plots, `N` is a two-element vector, `[nx ny]`.

See Also

See Also

`histcounts` | `histcounts2` | `histogram` | `histogram2` | `morebins`

Topics

histogram
histogram2

Introduced in R2014b

Feval (COM)

Evaluate MATLAB function in Automation server

Syntax

IDL Method Signature

```
HRESULT Feval([in] BSTR functionname, [in] long nargout,
[out] VARIANT* result, [in, optional] VARIANT arg1, arg2, ...)
```

Microsoft Visual Basic Client

```
Feval(String functionname, long numout,
arg1, arg2, ...) As Object
```

MATLAB Client

```
result = Feval(h,'functionname',numout,arg1,arg2,...)
```

Description

`result = Feval(h,'functionname',numout,arg1,arg2,...)` executes the MATLAB function specified by `functionname` in the Automation server attached to handle `h`. The function name is case-sensitive.

COM functions are available on Microsoft Windows systems only.

Indicate the number of outputs returned by the function in a `1`-by-`1` `double` array, `numout`. The server returns output from the function in the cell array, `result`.

You can specify as many as 32 input arguments to be passed to the function. These arguments follow `numout` in the `Feval` argument list. The following table shows ways to pass an argument.

Passing Mechanism	Description
Pass the value itself	To pass any numeric or character value, specify the value in the `Feval` argument list: `a = Feval(h,'sin',1,-pi:0.01:pi);`

Pass a client variable	To pass an argument assigned to a variable in the client, specify the variable name alone:
	
	`x = -pi:0.01:pi;`
	`a = Feval(h,'sin',1,x);`

Reference a server variable	To reference a variable defined in the server, specify the variable name followed by an equals (=) sign:
	
	`PutWorkspaceData(h,'x','base',-pi:0.01:pi);`
	`a = Feval(h,'sin',1,'x=');`
	
	MATLAB does not reassign the server variable.

Visual Basic .NET Examples

Passing Arguments

This example shows how to pass arguments using `Feval` to execute MATLAB commands on a MATLAB Automation server from a Visual Basic® .NET client.

- Pass two strings to the MATLAB function `strcat` on the server:

```
Dim Matlab As Object
Dim out As Object
out = Nothing
Matlab = CreateObject("matlab.application")
Matlab.Feval("strcat",1,out,"hello"," world")
```

- Define `clistr` locally and pass this variable:

```
Dim clistr As String
clistr = " world"
Matlab.Feval("strcat",1,out,"hello",clistr)
```

- Pass the name of a variable defined on the server:

```
Matlab.PutCharArray("srvstr","base"," world")
Matlab.Feval("strcat",1,out,"hello","srvstr=")
```

Defining Feval Return Values

`Feval` returns data from the evaluated function in a cell array. The cell array has one row for every return value. You control the number of return values using the `numout` argument.

```
Dim Matlab As Object
Dim out As Object
Matlab = CreateObject("matlab.application")
Matlab.Feval("fileparts",3,out,"d:\work\ConsoleApp.cpp")
```

Creating Server Variables

To modify server variable `A`, define variables `rows` and `cols` in the client.

- Create a matrix, `A`, in the server.

  ```
  Dim Matlab As Object
  Dim server_version As String
  Matlab = CreateObject("matlab.application")
  MatLab.PutWorkspaceData("A","base",rand(6))
  ```

- Reshape `A`.

  ```
  rows = 6
  cols = 3
  Matlab.Feval("reshape",0,"A=",rows,cols)
  ```

  MATLAB interprets `A` in the expression `'A='` as a server variable name.

- The `reshape` function does not modify variable `A`.

  ```
  Matlab.GetWorkspaceData("A","base",B)
  ```

  `A` is unchanged.

- To get the result of the `reshape` function, use the `numout` argument to assign the value to `C`.

  ```
  Matlab.Feval("reshape",1,"A=",rows,cols,C)
  ```

Tips

To display the output from `Feval` in the client window, assign a return value.

See Also

`Execute` | `PutFullMatrix` | `GetFullMatrix` | `PutCharArray` | `GetCharArray`

Introduced before R2006a

fft

Fast Fourier transform

Syntax

```
Y = fft(X)
Y = fft(X,n)
Y = fft(X,n,dim)
```

Description

`Y = fft(X)` computes the discrete Fourier transform (DFT) of `X` using a fast Fourier transform (FFT) algorithm.

- If `X` is a vector, then `fft(X)` returns the Fourier transform of the vector.
- If `X` is a matrix, then `fft(X)` treats the columns of `X` as vectors and returns the Fourier transform of each column.
- If `X` is a multidimensional array, then `fft(X)` treats the values along the first array dimension whose size does not equal 1 as vectors and returns the Fourier transform of each vector.

`Y = fft(X,n)` returns the `n`-point DFT. If no value is specified, `Y` is the same size as `X`.

- If `X` is a vector and the length of `X` is less than `n`, then `X` is padded with trailing zeros to length `n`.
- If `X` is a vector and the length of `X` is greater than `n`, then `X` is truncated to length `n`.
- If `X` is a matrix, then each column is treated as in the vector case.
- If `X` is a multidimensional array, then the first array dimension whose size does not equal 1 is treated as in the vector case.

`Y = fft(X,n,dim)` returns the Fourier transform along the dimension `dim`. For example, if `X` is a matrix, then `fft(X,n,2)` returns the n-point Fourier transform of each row.

Examples

Noisy Signal

Use Fourier transforms to find the frequency components of a signal buried in noise.

Specify the parameters of a signal with a sampling frequency of 1 kHz and a signal duration of 1 second.

```
Fs = 1000;            % Sampling frequency
T = 1/Fs;             % Sampling period
L = 1500;             % Length of signal
t = (0:L-1)*T;        % Time vector
```

Form a signal containing a 50 Hz sinusoid of amplitude 0.7 and a 120 Hz sinusoid of amplitude 1.

```
S = 0.7*sin(2*pi*50*t) + sin(2*pi*120*t);
```

Corrupt the signal with zero-mean white noise with a variance of 4.

```
X = S + 2*randn(size(t));
```

Plot the noisy signal in the time domain. It is difficult to identify the frequency components by looking at the signal `X(t)`.

```
plot(1000*t(1:50),X(1:50))
title('Signal Corrupted with Zero-Mean Random Noise')
xlabel('t (milliseconds)')
ylabel('X(t)')
```

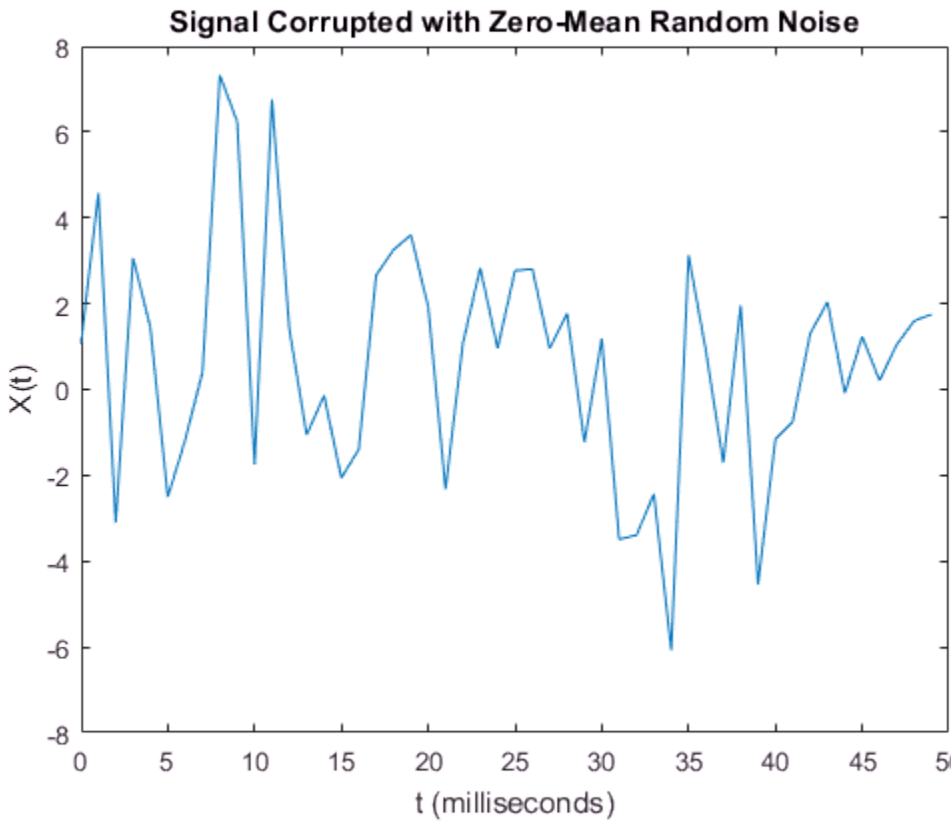

Compute the Fourier transform of the signal.

```
Y = fft(X);
```

Compute the two-sided spectrum `P2`. Then compute the single-sided spectrum `P1` based on `P2` and the even-valued signal length `L`.

```
P2 = abs(Y/L);
P1 = P2(1:L/2+1);
P1(2:end-1) = 2*P1(2:end-1);
```

Define the frequency domain `f` and plot the single-sided amplitude spectrum `P1`. The amplitudes are not exactly at 0.7 and 1, as expected, because of the added noise. On average, longer signals produce better frequency approximations.

```
f = Fs*(0:(L/2))/L;
plot(f,P1)
title('Single-Sided Amplitude Spectrum of X(t)')
xlabel('f (Hz)')
ylabel('|P1(f)|')
```

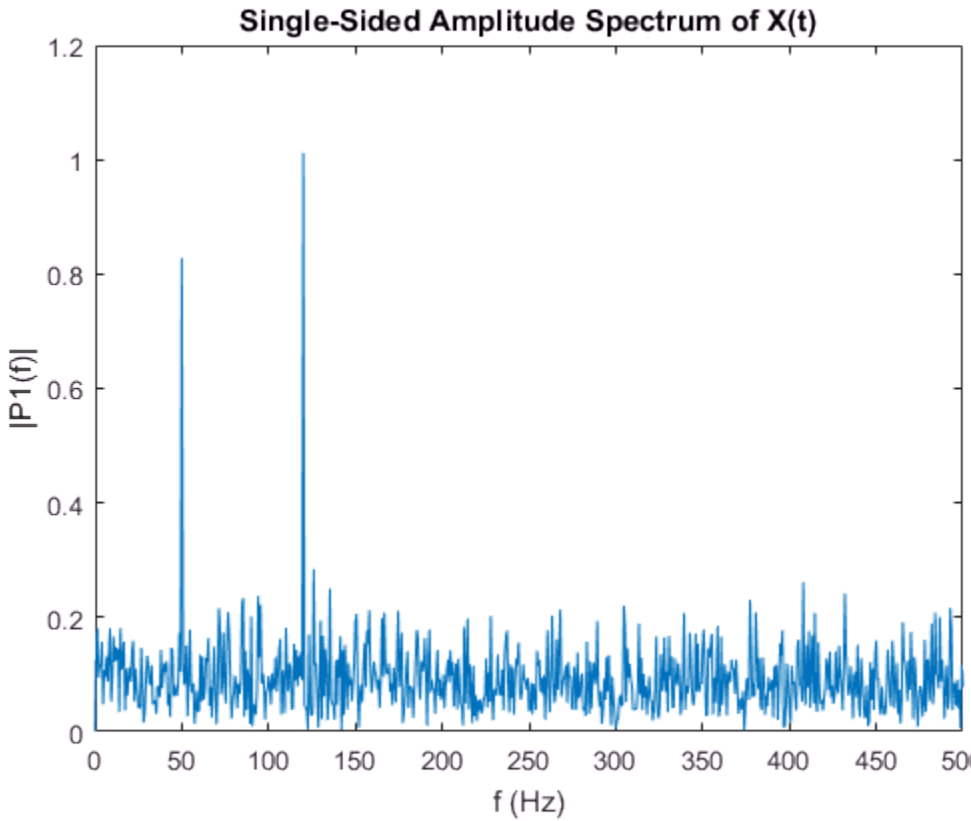

Now, take the Fourier transform of the original, uncorrupted signal and retrieve the exact amplitudes, 0.7 and 1.0.

```
Y = fft(S);
P2 = abs(Y/L);
P1 = P2(1:L/2+1);
P1(2:end-1) = 2*P1(2:end-1);
```

```
plot(f,P1)
title('Single-Sided Amplitude Spectrum of S(t)')
xlabel('f (Hz)')
ylabel('|P1(f)|')
```

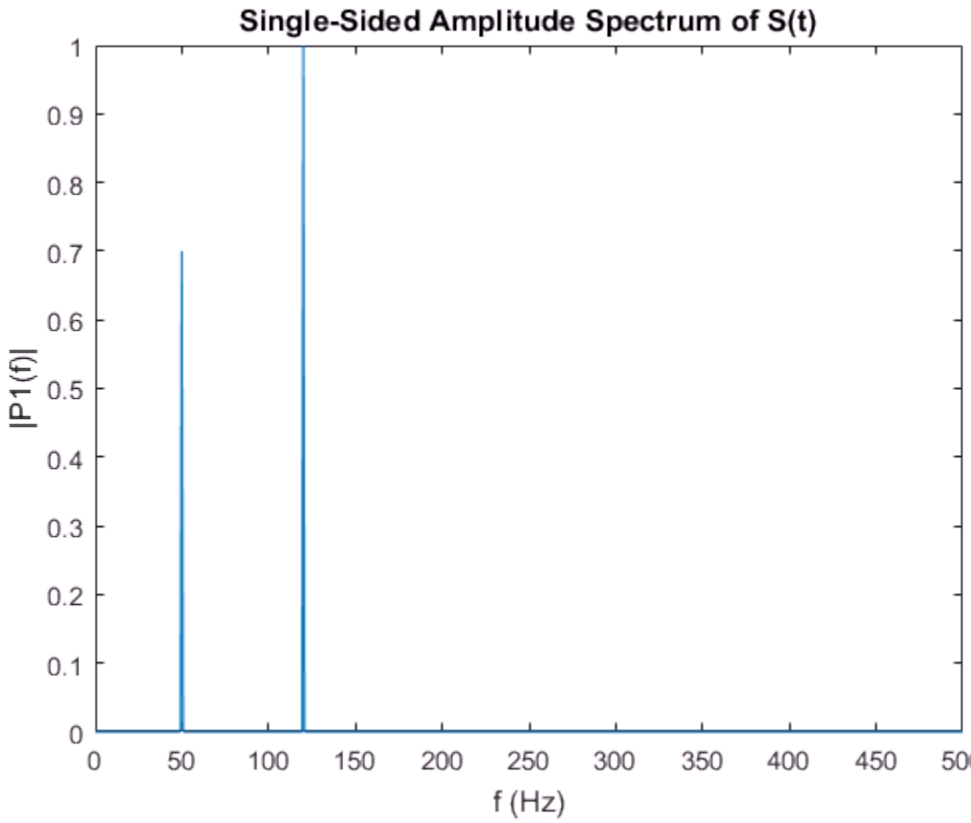

Gaussian Pulse

Convert a Gaussian pulse from the time domain to the frequency domain.

Define signal parameters and a Gaussian pulse, X.

```
Fs = 100;            % Sampling frequency
t = -0.5:1/Fs:0.5;   % Time vector
L = length(t);       % Signal length
```

```
X = 1/(4*sqrt(2*pi*0.01))*(exp(-t.^2/(2*0.01)));
```

Plot the pulse in the time domain.

```
plot(t,X)
title('Gaussian Pulse in Time Domain')
xlabel('Time (t)')
ylabel('X(t)')
```

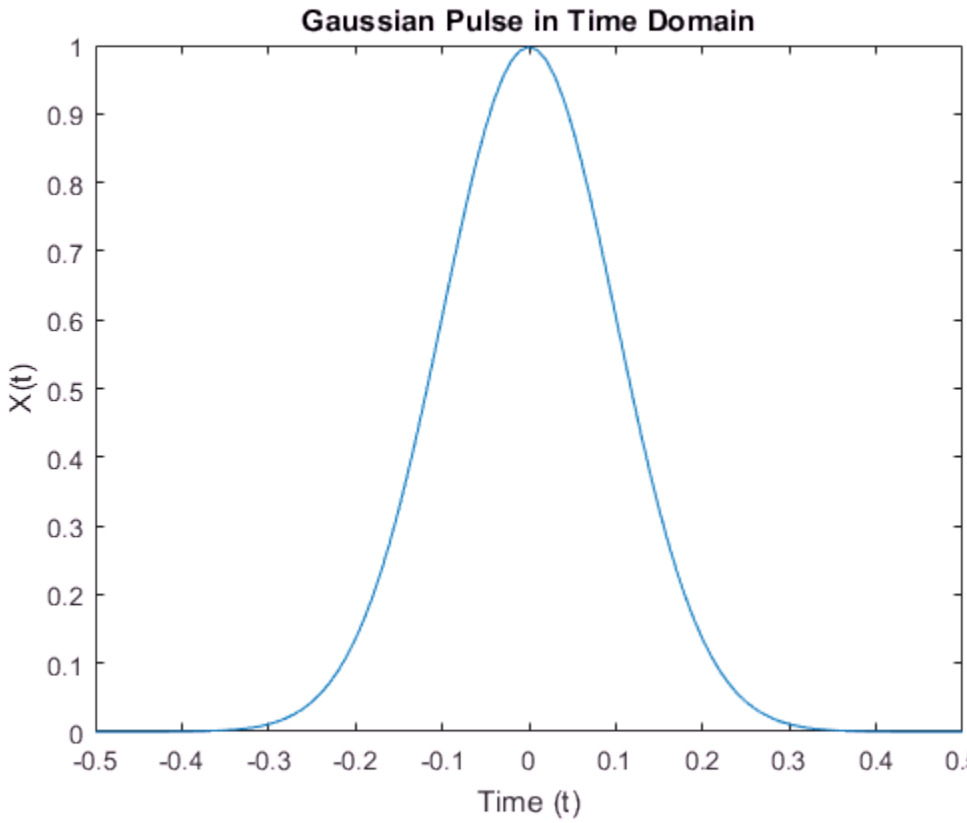

To use the `fft` function to convert the signal to the frequency domain, first identify a new input length that is the next power of 2 from the original signal length. This will pad the signal `X` with trailing zeros in order to improve the performance of `fft`.

```
n = 2^nextpow2(L);
```

Convert the Gaussian pulse to the frequency domain.

```
Y = fft(X,n);
```

Define the frequency domain and plot the unique frequencies.

```
f = Fs*(0:(n/2))/n;
P = abs(Y/n);

plot(f,P(1:n/2+1))
title('Gaussian Pulse in Frequency Domain')
xlabel('Frequency (f)')
ylabel('|P(f)|')
```

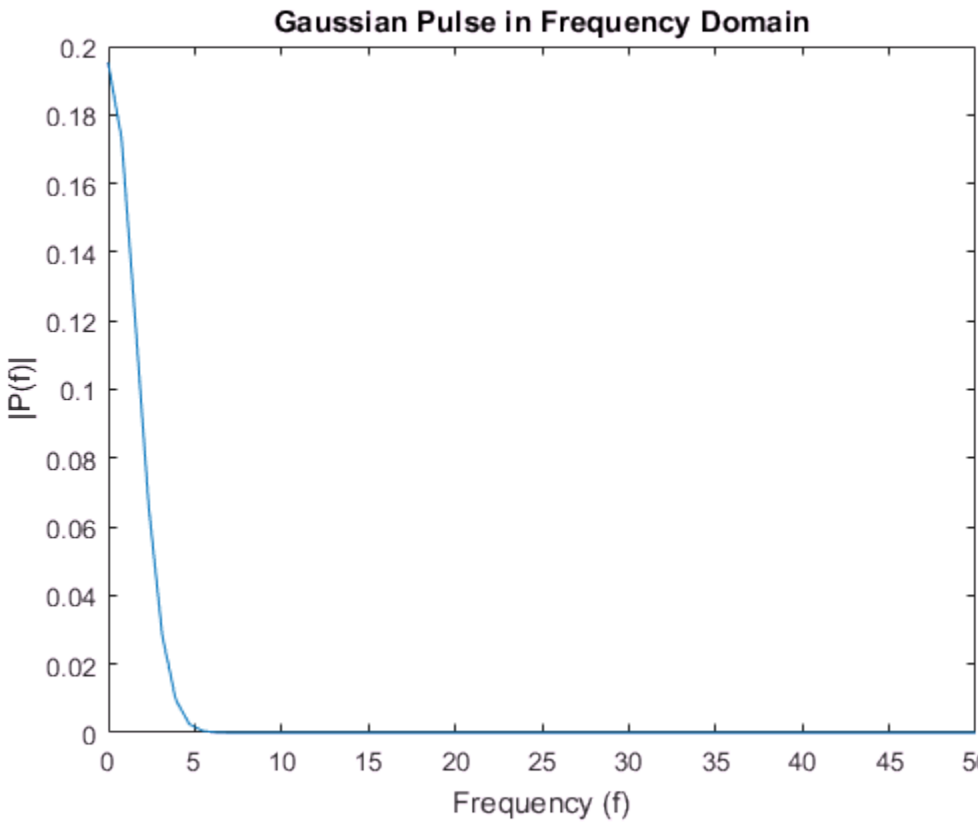

Cosine Waves

Compare cosine waves in the time domain and the frequency domain.

Specify the parameters of a signal with a sampling frequency of 1kHz and a signal duration of 1 second.

```
Fs = 1000;                      % Sampling frequency
T = 1/Fs;                       % Sampling period
L = 1000;                       % Length of signal
t = (0:L-1)*T;                  % Time vector
```

Create a matrix where each row represents a cosine wave with scaled frequency. The result, X, is a 3-by-1000 matrix. The first row has a wave frequency of 50, the second row has a wave frequency of 150, and the third row has a wave frequency of 300.

```
x1 = cos(2*pi*50*t);            % First row wave
x2 = cos(2*pi*150*t);           % Second row wave
x3 = cos(2*pi*300*t);           % Third row wave

X = [x1; x2; x3];
```

Plot the first 100 entries from each row of X in a single figure in order and compare their frequencies.

```
for i = 1:3
    subplot(3,1,i)
    plot(t(1:100),X(i,1:100))
    title(['Row ',num2str(i),' in the Time Domain'])
end
```

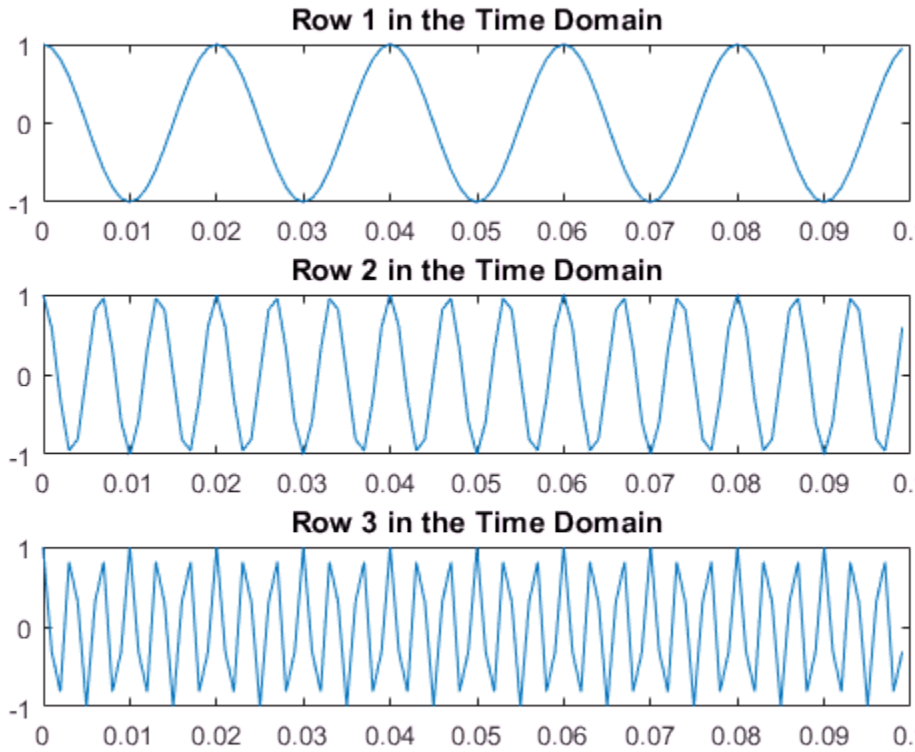

For algorithm performance purposes, `fft` allows you to pad the input with trailing zeros. In this case, pad each row of `X` with zeros so that the length of each row is the next higher power of 2 from the current length. Define the new length using the `nextpow2` function.

```
n = 2^nextpow2(L);
```

Specify the `dim` argument to use `fft` along the rows of `X`, that is, for each signal.

```
dim = 2;
```

Compute the Fourier transform of the signals.

```
Y = fft(X,n,dim);
```

Calculate the double-sided spectrum and single-sided spectrum of each signal.

```
P2 = abs(Y/n);
P1 = P2(:,1:n/2+1);
P1(:,2:end-1) = 2*P1(:,2:end-1);
```

In the frequency domain, plot the single-sided amplitude spectrum for each row in a single figure.

```
for i=1:3
    subplot(3,1,i)
    plot(0:(Fs/n):(Fs/2-Fs/n),P1(i,1:n/2))
    title(['Row ',num2str(i), ' in the Frequency Domain'])
end
```

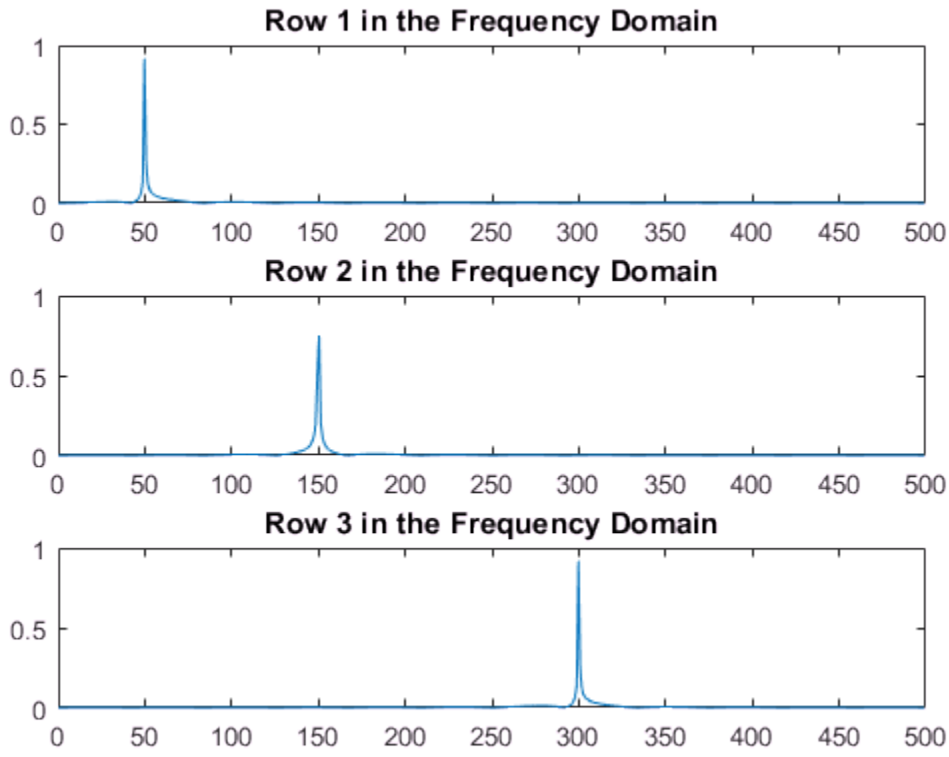

Input Arguments

X — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

If X is an empty 0-by-0 matrix, then fft(X) returns an empty 0-by-0 matrix.

Data Types: double | single | int8 | int16 | int32 | uint8 | uint16 | uint32 | logical
Complex Number Support: Yes

n — Transform length

[ ] (default) | nonnegative integer scalar

Transform length, specified as [ ] or a nonnegative integer scalar. Specifying a positive integer scalar for the transform length can increase the performance of fft. The length is typically specified as a power of 2 or a value that can be factored into a product of small prime numbers. If n is less than the length of the signal, then fft ignores the remaining signal values past the nth entry and returns the truncated result. If n is 0, then fft returns an empty matrix.

Example: n = 2^nextpow2(size(X,1))

Data Types: double | single | int8 | int16 | int32 | uint8 | uint16 | uint32 | logical

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

- fft(X,[],1) operates along the columns of X and returns the Fourier transform of each column.



fft(X,[],1)

- `fft(X,[],2)` operates along the rows of `X` and returns the Fourier transform of each row.



fft(X,[],2)

If `dim` is greater than `ndims(X)`, then `fft(X,[],dim)` returns `X`. When `n` is specified, `fft(X,n,dim)` pads or truncates `X` to length `n` along dimension `dim`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`

Output Arguments

Y — Frequency domain representation

vector | matrix | multidimensional array

Frequency domain representation returned as a vector, matrix, or multidimensional array.

If `X` is of type `single`, then `fft` natively computes in single precision, and `Y` is also of type `single`. Otherwise, `Y` is returned as type `double`.

The size of `Y` is as follows:

- For `Y = fft(X)` or `Y = fft(X,[],dim)`, the size of `Y` is equal to the size of `X`.
- For `Y = fft(X,n,dim)`, the value of `size(Y,dim)` is equal to `n`, while the size of all other dimensions remains as in `X`.

If `X` is real, then `Y` is conjugate symmetric, and the number of unique points in `Y` is `ceil((n+1)/2)`.

Data Types: `double` | `single`

Definitions

Discrete Fourier Transform of Vector

`Y = fft(X)` and `X = ifft(Y)` implement the Fourier transform and inverse Fourier transform, respectively. For `X` and `Y` of length `n`, these transforms are defined as follows:

$$Y(k) = \sum_{j=1}^{n} X(j) W_n^{(j-1)(k-1)}$$

$$X(j) = \frac{1}{n} \sum_{k=1}^{n} Y(k) W_n^{-(j-1)(k-1)},$$

where

$$W_n = e^{(-2\pi i)/n}$$

is one of n roots of unity.

Tips

- The execution time for `fft` depends on the length of the transform. The time is fastest for powers of two and almost as fast for lengths that have only small prime factors. The time is typically several times slower for lengths that are prime, or which have large prime factors.

- For most values of `n`, real-input DFTs require roughly half the computation time of complex-input DFTs. However, when `n` has large prime factors, there is little or no speed difference.
- You can potentially increase the speed of `fft` using the utility function, `fftw`. This function controls the optimization of the algorithm used to compute an FFT of a particular size and dimension.

Algorithms

The FFT functions (`fft`, `fft2`, `fftn`, `ifft`, `ifft2`, `ifftn`) are based on a library called FFTW [1] [2].

References

[1] FFTW (http://www.fftw.org)

[2] Frigo, M., and S. G. Johnson. "FFTW: An Adaptive Software Architecture for the FFT." *Proceedings of the International Conference on Acoustics, Speech, and Signal Processing*. Vol. 3, 1998, pp. 1381-1384.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`fft2` | `fftn` | `fftshift` | `fftw` | `ifft`

Topics

"Fourier Transforms"

Introduced before R2006a

fft2

2-D fast Fourier transform

Syntax

```
Y = fft2(X)
Y = fft2(X,m,n)
```

Description

`Y = fft2(X)` returns the two-dimensional Fourier transform of a matrix using a fast Fourier transform algorithm, which is equivalent to computing `fft(fft(X).').'`. If `X` is a multidimensional array, then `fft2` takes the 2-D transform of each dimension higher than 2. The output `Y` is the same size as `X`.

`Y = fft2(X,m,n)` truncates `X` or pads `X` with trailing zeros to form an `m`-by-`n` matrix before computing the transform. `Y` is `m`-by-`n`. If `X` is a multidimensional array, then `fft2` shapes the first two dimensions of `X` according to `m` and `n`.

Examples

2-D Transform

The 2-D Fourier transform is useful for processing 2-D signals and other 2-D data such as images.

Create and plot 2-D data with repeated blocks.

```
P = peaks(20);
X = repmat(P,[5 10]);
imagesc(X)
```

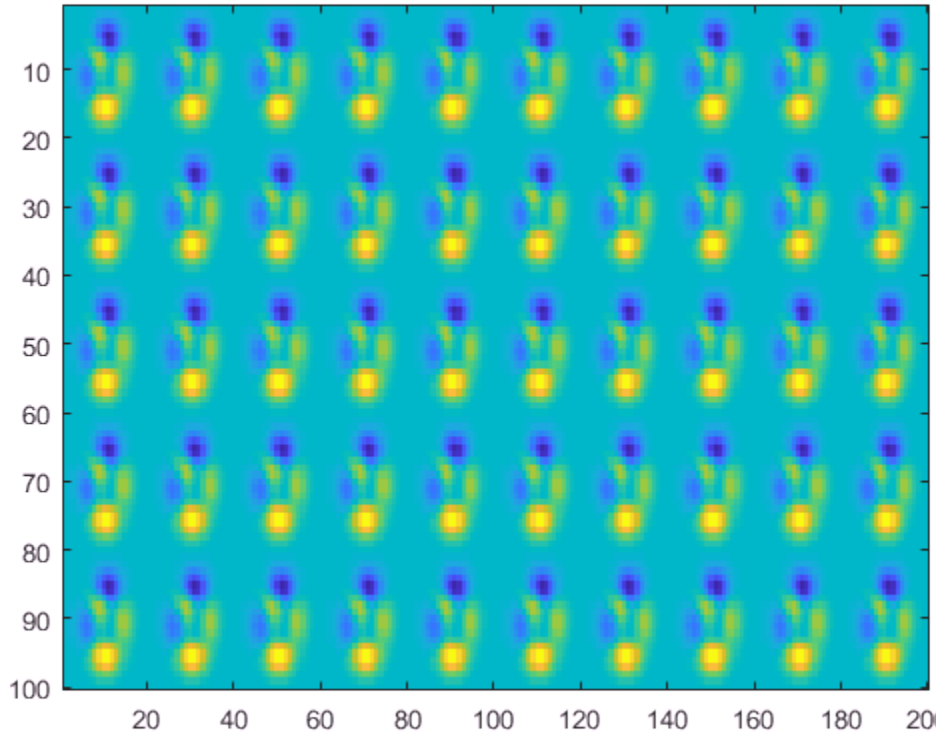

Compute the 2-D Fourier transform of the data. Shift the zero-frequency component to the center of the output, and plot the resulting 100-by-200 matrix, which is the same size as A.

```
Y = fft2(X);
imagesc(abs(fftshift(Y)))
```

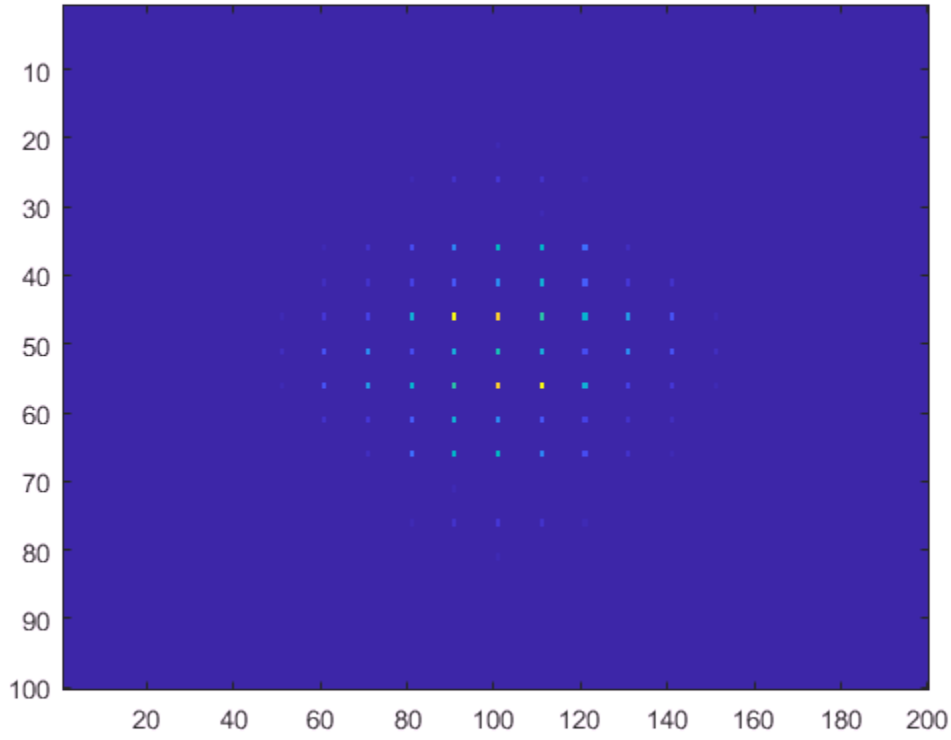

Pad X with zeros to compute a 128-by-256 transform.

```
Y = fft2(X,2^nextpow2(100),2^nextpow2(200));
imagesc(abs(fftshift(Y)));
```

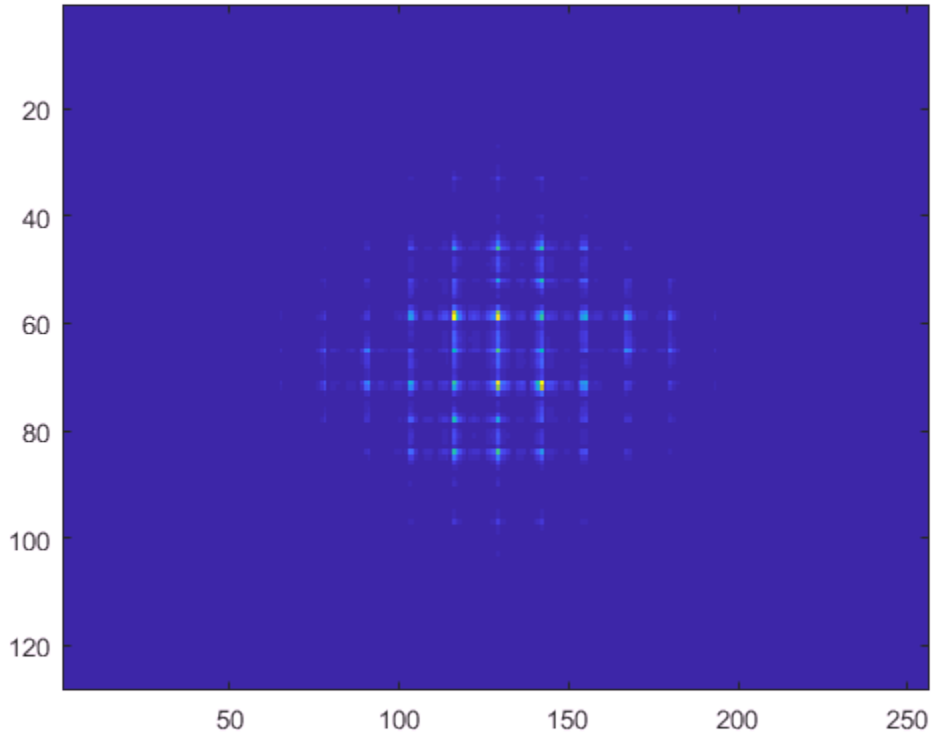

Input Arguments

X — Input array

matrix | multidimensional array

Input array, specified as a matrix or a multidimensional array. If `X` is of type `single`, then `fft2` natively computes in single precision, and `Y` is also of type `single`. Otherwise, `Y` is returned as type `double`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`

Complex Number Support: Yes

`m` — Number of transform rows
positive integer scalar

Number of transform rows, specified as a positive integer scalar.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`

`n` — Number of transform columns
positive integer scalar

Number of transform columns, specified as a positive integer scalar.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`

Definitions

2-D Fourier Transform

This formula defines the discrete Fourier transform Y of an m-by-n matrix X:

$$Y_{p+1,q+1} = \sum_{j=0}^{m-1} \sum_{k=0}^{n-1} \omega_m^{jp} \omega_n^{kq} X_{j+1,k+1}$$

ω_m and ω_n are complex roots of unity:

$$\omega_m = e^{-2\pi i/m}$$
$$\omega_n = e^{-2\pi i/n}$$

i is the imaginary unit. p and j are indices that run from 0 to m–1, and q and k are indices that run from 0 to n–1. This formula shifts the indices for X and Y by 1 to reflect matrix indices in MATLAB.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`fft` | `fftn` | `fftw` | `ifft2`

Introduced before R2006a

fftn

N-D fast Fourier transform

Syntax

```
Y = fftn(X)
Y = fftn(X,sz)
```

Description

`Y = fftn(X)` returns the multidimensional Fourier transform of an N-D array using a fast Fourier transform algorithm. The N-D transform is equivalent to computing the 1-D transform along each dimension of `X`. The output `Y` is the same size as `X`.

`Y = fftn(X,sz)` truncates `X` or pads `X` with trailing zeros before taking the transform according to the elements of the vector `sz`. Each element of `sz` defines the length of the corresponding transform dimensions. For example, if `X` is a 5-by-5-by-5 array, then `Y = fftn(X,[8 8 8])` pads each dimension with zeros resulting in an 8-by-8-by-8 transform `Y`.

Examples

3-D Transform

You can use the `fftn` function to compute a 1-D fast Fourier transform in each dimension of a multidimensional array.

Create a 3-D signal `X`. The size of `X` is 20-by-20-by-20.

```
x = (1:20)';
y = 1:20;
z = reshape(1:20,[1 1 20]);
X = cos(2*pi*0.01*x) + sin(2*pi*0.02*y) + cos(2*pi*0.03*z);
```

Compute the 3-D Fourier transform of the signal, which is also a 20-by-20-by-20 array.

```
Y = fftn(X);
```

Pad X with zeros to compute a 32-by-32-by-32 transform.

```
m = nextpow2(20);
Y = fftn(X,[2^m 2^m 2^m]);
size(Y)
```

```
ans =

    32    32    32
```

Input Arguments

X — Input array

matrix | multidimensional array

Input array, specified as a matrix or a multidimensional array. If X is of type `single`, then `fftn` natively computes in single precision, and Y is also of type `single`. Otherwise, Y is returned as type `double`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`
Complex Number Support: Yes

sz — Length of transform dimensions

vector of positive integers

Length of the transform dimensions, specified as a vector of positive integers. The elements of `sz` correspond to the transformation lengths of the corresponding dimensions of X. `length(sz)` must be equal to `ndims(X)`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`

Definitions

N-D Fourier Transform

The discrete Fourier transform Y of an N-D array X is defined as

$$Y_{p_1,p_2,\ldots,p_N} = \sum_{j_1=0}^{m_1-1} \omega_{m_1}^{p_1 j_1} \sum_{j_2=0}^{m_2-1} \omega_{m_2}^{p_2 j_2} \ldots \sum_{j_N}^{m_N-1} \omega_{m_N}^{p_N j_N} X_{j_1,j_2,\ldots,j_N}.$$

Each dimension has length m_k for $k = 1,2,\ldots,N$, and $\omega_{m_k} = e^{-2\pi i/m_k}$ are complex roots of unity where i is the imaginary unit.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The `sz` argument must have a fixed size.

See Also

See Also

`fft` | `fft2` | `fftw` | `ifftn`

Introduced before R2006a

fftshift

Shift zero-frequency component to center of spectrum

Syntax

```
Y = fftshift(X)
Y = fftshift(X,dim)
```

Description

`Y = fftshift(X)` rearranges a Fourier transform `X` by shifting the zero-frequency component to the center of the array.

- If `X` is a vector, then `fftshift` swaps the left and right halves of `X`.
- If `X` is a matrix, then `fftshift` swaps the first quadrant of `X` with the third, and the second quadrant with the fourth.
- If `X` is a multidimensional array, then `fftshift` swaps half-spaces of `X` along each dimension.

`Y = fftshift(X,dim)` operates along the dimension `dim` of `X`. For example, if `X` is a matrix whose rows represent multiple 1-D transforms, then `fftshift(X,2)` swaps the halves of each row of `X`.

Examples

Shift Vector Elements

Swap the left and right halves of a row vector. If a vector has an odd number of elements, then the middle element is considered part of the left half of the vector.

```
Xeven = [1 2 3 4 5 6];
fftshift(Xeven)
```

```
ans =
```

```
     4     5     6     1     2     3
```

```
Xodd = [1 2 3 4 5 6 7];
fftshift(Xodd)
```

```
ans =

     5     6     7     1     2     3     4
```

Shift 1-D Signal

When analyzing the frequency components of signals, it can be helpful to shift the zero-frequency components to the center.

Create a signal S, compute its Fourier transform, and plot the power.

```
fs = 100;                % sampling frequency
t = 0:(1/fs):(10-1/fs); % time vector
S = cos(2*pi*15*t);
n = length(S);
X = fft(S);
f = (0:n-1)*(fs/n);      %frequency range
power = abs(X).^2/n;     %power
plot(f,power)
```

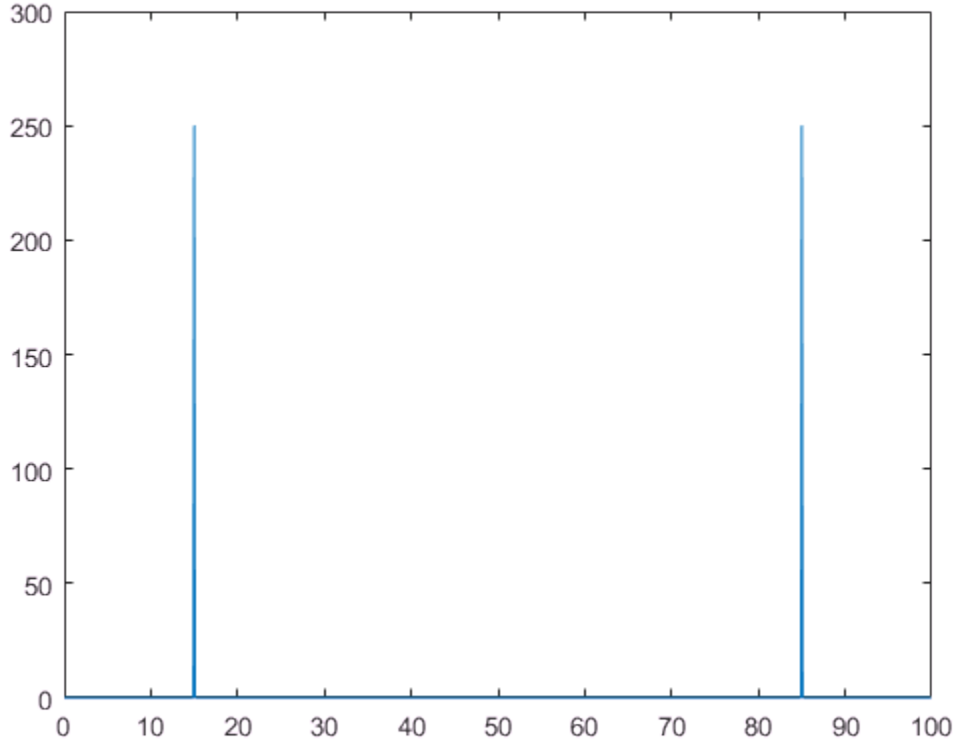

Shift the zero-frequency components and plot the zero-centered power.

```
Y = fftshift(X);
fshift = (-n/2:n/2-1)*(fs/n); % zero-centered frequency range
powershift = abs(Y).^2/n;     % zero-centered power
plot(fshift,powershift)
```

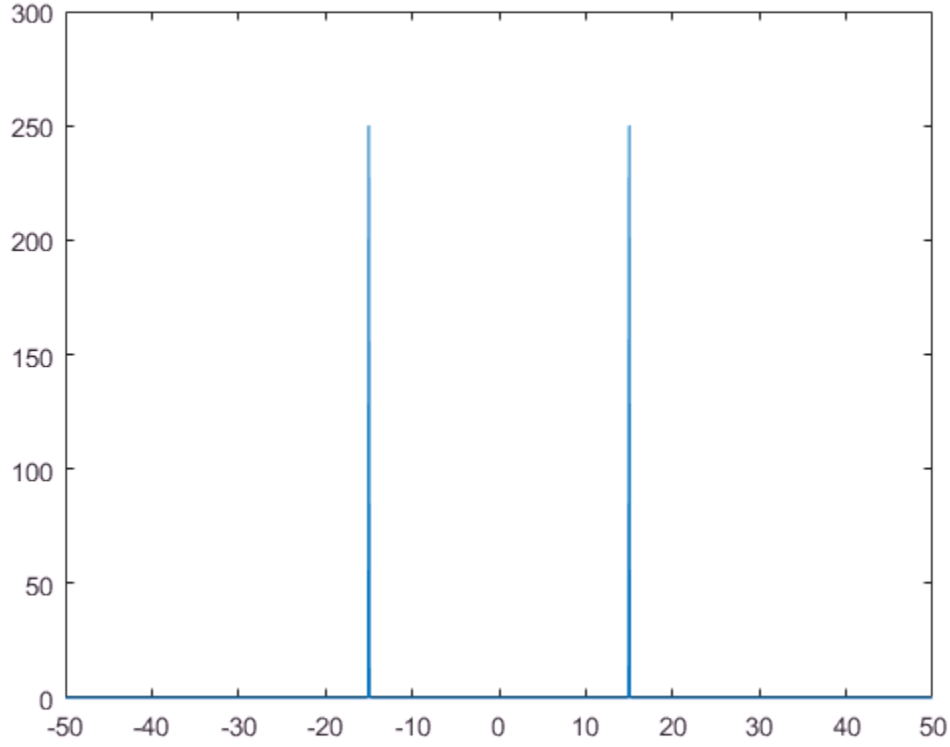

Shift Signals in Matrix

You can process multiple 1-D signals by representing them as rows in a matrix. Then use the dimension argument to compute the Fourier transform and shift the zero-frequency components for each row.

Create a matrix A whose rows represent two 1-D signals, and compute the Fourier transform of each signal. Plot the power for each signal.

```
fs = 100;                % sampling frequency
t = 0:(1/fs):(10-1/fs); % time vector
S1 = cos(2*pi*15*t);
```

```
S2 = cos(2*pi*30*t);
n = length(S1);
A = [S1; S2];
X = fft(A,[],2);
f = (0:n-1)*(fs/n);      % frequency range
power = abs(X).^2/n;     % power
plot(f,power(1,:),f,power(2,:))
```

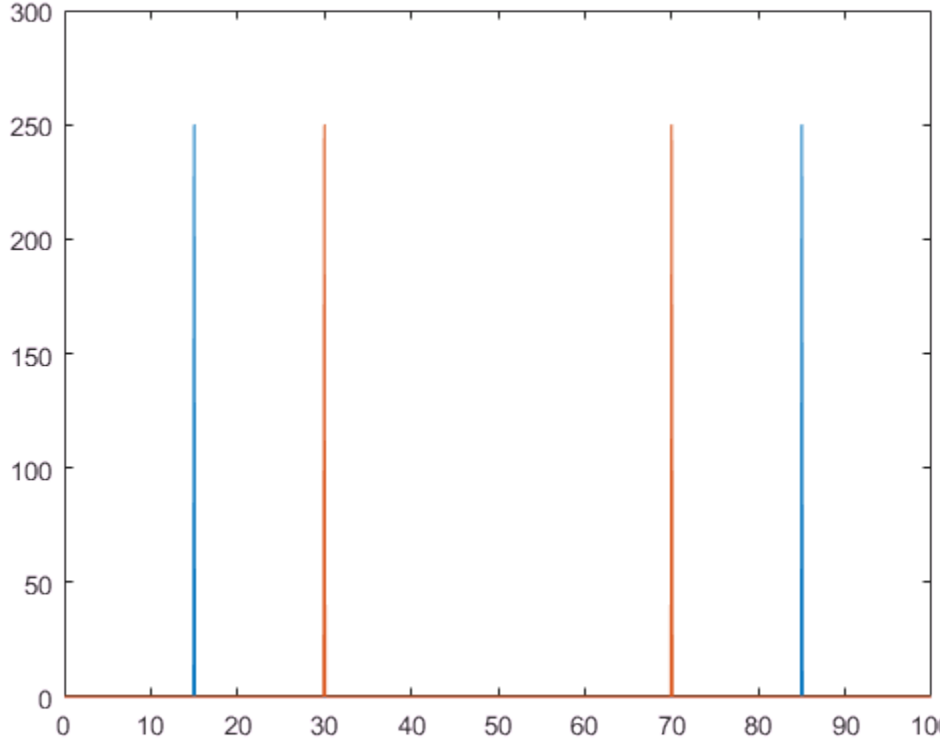

Shift the zero-frequency components, and plot the zero-centered power of each signal.

```
Y = fftshift(X,2);
fshift = (-n/2:n/2-1)*(fs/n); % zero-centered frequency range
powershift = abs(Y).^2/n;     % zero-centered power
plot(fshift,powershift(1,:),fshift,powershift(2,:))
```

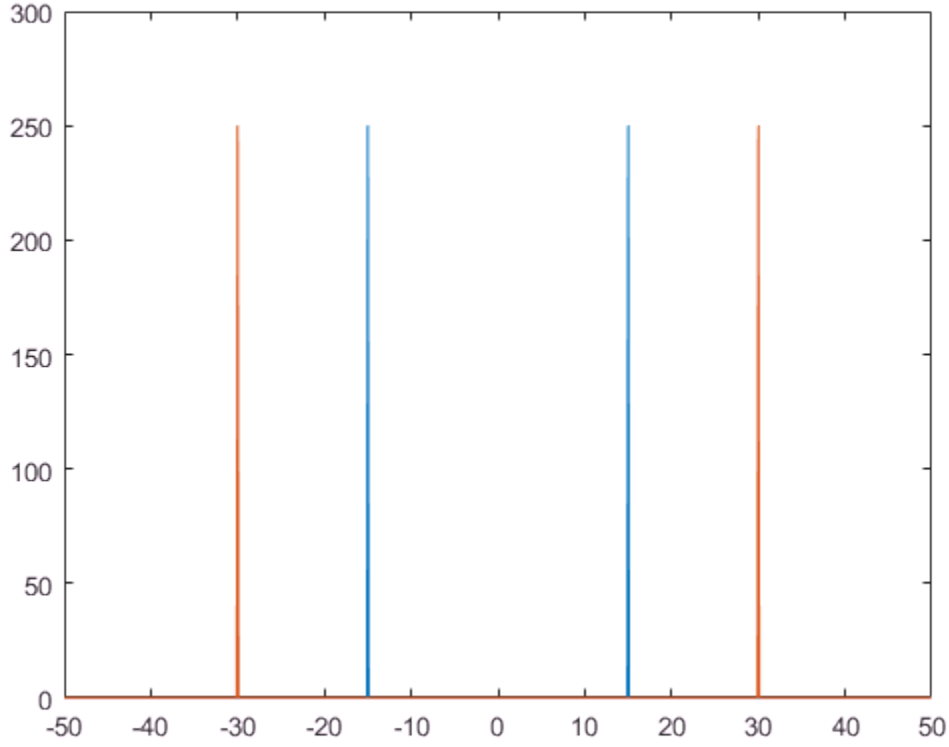

Input Arguments

X — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, a matrix, or a multidimensional array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

`dim` — Dimension to operate along
positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then `fftshift` swaps along all dimensions.

- Consider an input matrix `Xc`. The operation `fftshift(Xc,1)` swaps halves of each column of `Xc`.



fftshift(Xc,1)

- Consider a matrix `Xr`. The operation `fftshift(Xr,2)` swaps halves of each row of `Xr`.



fftshift(Xr,2)

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`fft` | `fft2` | `fftn` | `fftw` | `ifftshift`

Introduced before R2006a

fftw

Define method for determining FFT algorithm

Syntax

```
method = fftw('planner')
previous = fftw('planner',method)
```

```
fftinfo = fftw(wisdom)
previous = fftw(wisdom,fftinfo)
```

Description

`method = fftw('planner')` returns the method that the fast Fourier transform functions `fft`, `fft2`, `fftn`, `ifft`, `ifft2`, and `ifftn` use to determine a transform algorithm. The default method is `'estimate'`, which determines the algorithm based on the size of the data.

`previous = fftw('planner',method)` sets the method and optionally returns the previous method. For example, `fftw('planner','measure')` chooses the fastest algorithm based on the size and type of the data.

`fftinfo = fftw(wisdom)` returns the optimal transform parameters established in the current MATLAB session for the precision specified in `wisdom`. For example, `fftinfo = fftw('dwisdom')` saves the current double-precision transform parameters.

`previous = fftw(wisdom,fftinfo)` applies the parameters in `fftinfo` to the transform algorithm for the precision specified in `wisdom`.

Examples

Optimal Fourier Transform Workflow

The `fftw` function can improve the performance of Fourier transform functions by trying to optimize computation based on the size and type of the data.

Clear any existing double-precision transform parameters.

```
fftw('dwisdom',[]);
```

Set the method for optimizing Fourier transforms within the current MATLAB® session to `'measure'`.

```
fftw('planner','measure');
```

Define a random vector and use the `fft` function to compute the Fourier transform. `fft` uses an algorithm that tries to optimize computation for the 500-by-1 transform. The first call to `fft` can be slower than normal, but subsequent calls will be significanly faster.

```
X = rand(500,1);
tic; fft(X); toc;
```

```
Elapsed time is 0.016589 seconds.
```

```
tic; fft(X); toc;
```

```
Elapsed time is 0.000198 seconds.
```

Assign the current double-precision transform algorithm parameters to the variable `fftinfo` for later use.

```
fftinfo = fftw('dwisdom');
```

Apply the parameter information stored in the variable `fftinfo` to future transform function calls.

```
fftw('dwisdom',fftinfo);
```

Input Arguments

`method` — Method for setting transform parameters

`'estimate'` (default) | `'measure'` | `'patient'` | `'exhaustive'` | `'hybrid'`

Method for setting transform parameters, specified as one of the following:

- `'estimate'` — Determine a best-guess transform algorithm based on the size of problem.
- `'measure'` — Find a better algorithm by computing multiple transforms and measuring the run times.

- `'patient'` — Run a wider range of testing compared to `'method'`, resulting in a better transform algorithm, but at the expense of higher computational cost to determine the parameters.
- `'exhaustive'` — Runs all tests including ones unlikely to be optimal, resulting in the best algorithm, but with the highest computational cost to determine the parameters.
- `'hybrid'` — Use a combination of `'measure'` for transforms with dimension length 8192 or smaller and `'estimate'` for transforms with dimension length larger than 8192.

Data Types: `char` | `string`

`wisdom` — Transform parameter precision
`'swisdom'` | `'dwisdom'`

Transform parameter precision, specified as either `'swisdom'` or `'dwisdom'`. The option `'swisdom'` specifies transform parameters for single-precision computation, and `'dwisdom'` specifies parameters for double-precision computation.

Data Types: `char`

`fftinfo` — Transform parameters
character array | `[]`

Transform parameters, specified as a character array of transform parameters returned by `fftw(wisdom)` or the empty array `[]`. The empty array `[]` clears the database.

Data Types: `char`

Tips

- Transform parameters returned by `fftw` are most useful when saved and applied on one computer using the same version of MATLAB each session. Transferring saved parameters between computers can result in degraded performance, even if both computers have the same operating system and MATLAB version.

Algorithms

- For transform lengths that are powers of 2 between 2^{14} and 2^{22}, MATLAB uses pre-loaded information from its internal database to optimize the transform computation.

Tuning is not executed for exact powers of 2 unless you clear the database using the command `fftw(wisdom,[])`.

References

[1] FFTW (http://www.fftw.org)

See Also

See Also

`fft` | `fft2` | `fftn` | `ifft` | `ifft2` | `ifftn`

Introduced before R2006a

fgetl

Read line from file, removing newline characters

Syntax

tline = fgetl(*fileID*)

Description

tline = fgetl(*fileID*) returns the next line of the specified file, removing the newline characters. *fileID* is an integer file identifier obtained from fopen. *tline* is a character vector unless the line contains only the end-of-file marker. In this case, *tline* is the numeric value -1.

fgetl reads characters using the encoding scheme associated with the file. To specify the encoding scheme, use fopen.

Examples

Read and display the file fgetl.m one line at a time:

```
fid = fopen('fgetl.m');

tline = fgetl(fid);
while ischar(tline)
    disp(tline)
    tline = fgetl(fid);
end

fclose(fid);
```

Compare these results to the fgets example, which replaces the calls to fgetl with fgets.

See Also

`fclose` | `feof` | `ferror` | `fgets` | `fopen` | `fprintf` | `fread` | `fscanf` | `fwrite` | `textscan`

Topics

"Testing for EOF with fgetl and fgets"

Introduced before R2006a

fgetl (serial)

Read line of ASCII text from device and discard terminator

Syntax

```
tline = fgetl(obj)
[tline,count] = fgetl(obj)
[tline,count,msg] = fgetl(obj)
```

Description

`tline = fgetl(obj)` reads one line of ASCII text from the device connected to the serial port object, `obj`, and returns the data to `tline`. This returned data does not include the terminator with the text line. To include the terminator, use `fgets`.

`[tline,count] = fgetl(obj)` returns the number of values read to `count`, including the terminator.

`[tline,count,msg] = fgetl(obj)` returns a warning message to `msg` if the read operation was unsuccessful.

Examples

On a Windows platform, create the serial port object `s`, connect `s` to a Tektronix® TDS 210 oscilloscope, and write the `RS232?` command with the `fprintf` function. `RS232?` instructs the scope to return serial port communications settings.

```
s = serial('COM1');
fopen(s)
fprintf(s,'RS232?')
```

Because the default value for the `ReadAsyncMode` property is `continuous`, data is automatically returned to the input buffer.

```
s.BytesAvailable
```

```
ans =
```

```
    17
```

Use `fgetl` to read the data returned from the previous write operation, and discard the terminator.

```
settings = fgetl(s)
```

```
settings =
9600;0;0;NONE;LF
```

```
length(settings)
```

```
ans =
    16
```

Disconnect `s` from the scope, and remove `s` from memory and the workspace.

```
fclose(s)
delete(s)
clear s
```

Tips

Before you can read text from the device, it must be connected to `obj` with the `fopen` function. A connected serial port object has a `Status` property value of `open`. An error is returned if you attempt to perform a read operation while `obj` is not connected to the device.

If `msg` is not included as an output argument and the read operation was not successful, then a warning message is returned to the command line.

The `ValuesReceived` property value is increased by the number of values read – including the terminator – each time `fgetl` is issued.

Note: You cannot use ASCII values larger than 127 characters. The function is limited to 127 binary characters.

Rules for Completing a Read Operation with fgetl

A read operation with `fgetl` blocks access to the MATLAB command line until:

- The terminator specified by the `Terminator` property is reached.
- The time specified by the `Timeout` property passes.
- The input buffer is filled.

Note: You cannot use ASCII values larger than 127 characters. The function is limited to 127 binary characters.

See Also

`fgets` | `fopen` | `BytesAvailable` | `InputBufferSize` | `ReadAsyncMode` | `Status` | `Terminator` | `Timeout` | `ValuesReceived`

Introduced before R2006a

fgets

Read line from file, keeping newline characters

Syntax

```
tline = fgets(fileID)
tline = fgets(fileID, nchar)
```

Description

tline = fgets(*fileID*) reads the next line of the specified file, including the newline characters. *fileID* is an integer file identifier obtained from fopen. *tline* is a character vector unless the line contains only the end-of-file marker. In this case, *tline* is the numeric value -1. fgets reads characters using the encoding scheme associated with the file. To specify the encoding scheme, use fopen.

tline = fgets(*fileID*, *nchar*) returns at most *nchar* characters of the next line. *tline* does not include any characters after the newline characters or the end-of-file marker.

Examples

Read and display the file fgets.m. Because fgets keeps newline characters and disp adds a newline character, this code displays the file with double-spacing:

```
fid = fopen('fgets.m');

tline = fgets(fid);
while ischar(tline)
    disp(tline)
    tline = fgets(fid);
end

fclose(fid);
```

Compare these results to the fgetl example, which replaces the calls to fgets with fgetl.

See Also

`fclose` | `feof` | `ferror` | `fgetl` | `fopen` | `fprintf` | `fread` | `fscanf` | `fwrite` | `textscan`

Topics

"Testing for EOF with fgetl and fgets"

Introduced before R2006a

fgets (serial)

Read line of text from device and include terminator

Syntax

```
tline = fgets(obj)
[tline,count] = fgets(obj)
[tline,count,msg] = fgets(obj)
```

Description

`tline = fgets(obj)` reads one line of text from the device connected to the serial port object, `obj`, and returns the data to `tline`. This returned data includes the terminator with the text line. To exclude the terminator, use `fgetl`.

`[tline,count] = fgets(obj)` returns the number of values read to `count`, including the terminator.

`[tline,count,msg] = fgets(obj)` returns a warning message to `msg` if the read operation was unsuccessful.

Examples

Create the serial port object `s`, connect `s` to a Tektronix TDS 210 oscilloscope, and write the `RS232?` command with the `fprintf` function. `RS232?` instructs the scope to return serial port communications settings.

```
s = serial('COM1');
fopen(s)
fprintf(s,'RS232?')
```

Because the default value for the `ReadAsyncMode` property is `continuous`, data is automatically returned to the input buffer.

```
s.BytesAvailable
```

```
ans =
```

```
    17
```

Use `fgets` to read the data returned from the previous write operation, and include the terminator.

```
settings = fgets(s)
```

```
settings =
9600;0;0;NONE;LF
```

```
length(settings)
```

```
ans =
    17
```

Disconnect `s` from the scope, and remove `s` from memory and the workspace.

```
fclose(s)
delete(s)
clear s
```

Tips

Before you can read text from the device, it must be connected to `obj` with the `fopen`function. A connected serial port object has a `Status` property value of `open`. An error is returned if you attempt to perform a read operation while `obj` is not connected to the device.

If `msg` is not included as an output argument and the read operation was not successful, then a warning message is returned to the command line.

The `ValuesReceived` property value is increased by the number of values read – including the terminator – each time `fgets` is issued.

Note: You cannot use ASCII values larger than 127 characters. The function is limited to 127 binary characters.

Rules for Completing a Read Operation with fgets

A read operation with `fgets` blocks access to the MATLAB command line until:

- The terminator specified by the `Terminator` property is reached.
- The time specified by the `Timeout` property passes.
- The input buffer is filled.

Note: You cannot use ASCII values larger than 127 characters. The function is limited to 127 binary characters.

See Also

`fgetl` | `fopen` | `BytesAvailable` | `BytesAvailableFcn` | `InputBufferSize` | `Status` | `Terminator` | `Timeout` | `ValuesReceived`

Introduced before R2006a

fieldnames

Field names of structure, or public fields of COM or Java object

Syntax

```
names = fieldnames(s)
names = fieldnames(obj,'-full')
```

Description

`names = fieldnames(s)` returns a cell array of character vectors containing the names of the fields in structure `s`.

`names = fieldnames(obj,'-full')` returns a cell array of character vectors containing the name, type, attributes, and inheritance of the properties of `obj`. Only supported for COM or Java objects.

Examples

Structure Fields

Create a structure array and view its fields.

```
s(1,1).name = 'alice';
s(1,1).ID = 0;
s(2,1).name = 'gertrude';
s(2,1).ID = 1;

names = fieldnames(s)
```

```
names = 2×1 cell array
    'name'
    'ID'
```

Java Object Properties

Create a Java® object and view its public properties.

```
obj = java.lang.Integer(0);
names = fieldnames(obj,'-full')
```

```
names = 4×1 cell array
    'static final int MIN_VALUE'
    'static final int MAX_VALUE'
    'static final java.lang.Class TYPE'
    'static final int SIZE'
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The input must be a structure. Objects are not supported.

See Also

`setfield` | `getfield` | `isfield` | `orderfields` | `rmfield` | `properties`

Topics

"Generate Field Names from Variables"

Introduced before R2006a

figure

Create figure window

Syntax

```
figure
figure(Name,Value)
f = figure( ___ )
```

```
figure(f)
figure(n)
```

Description

`figure` creates a new figure window using default property values. The resulting figure is the current figure.

`figure(Name,Value)` modifies properties of the figure using one or more name-value pair arguments. For example, `figure('Color','white')` sets the background color to white.

`f = figure( ___ )` returns the `Figure` object. Use `f` to query or modify properties of the figure after it is created.

`figure(f)` makes the figure specified by `f` the current figure and displays it on top of all other figures.

`figure(n)` finds a figure in which the `Number` property is equal to `n`, and makes it the current figure. If no figure exists with that property value, MATLAB creates a new figure and sets its `Number` property to `n`.

Examples

Specify Figure Title

Create a figure, and specify the `Name` property. By default, the resulting title includes the figure number.

```
figure('Name','Measured Data');
```

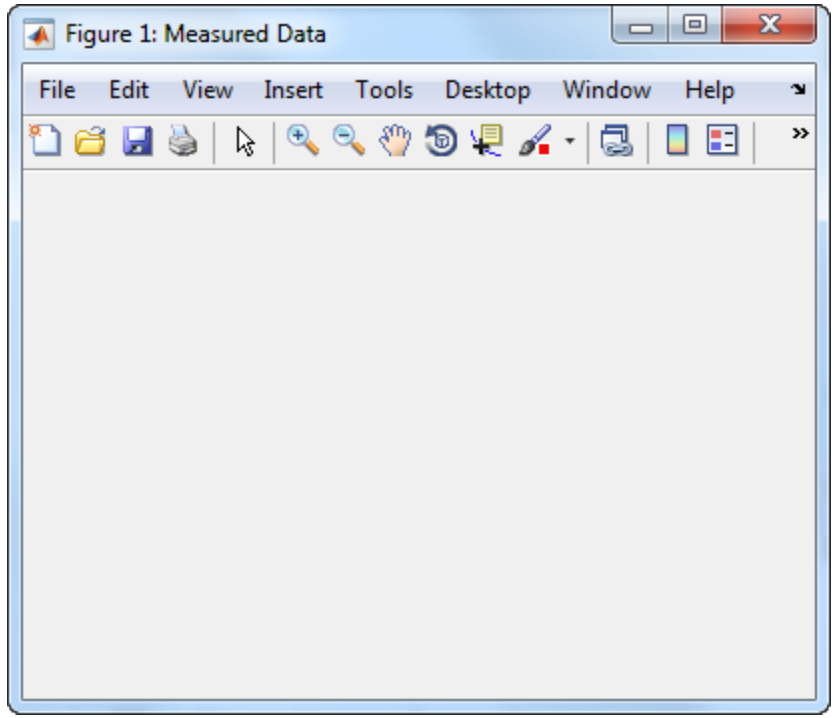

Specify the `Name` property again, but this time, set the `NumberTitle` property to `'off'`. The resulting title does not include the figure number.

```
figure('Name','Measured Data','NumberTitle','off');
```

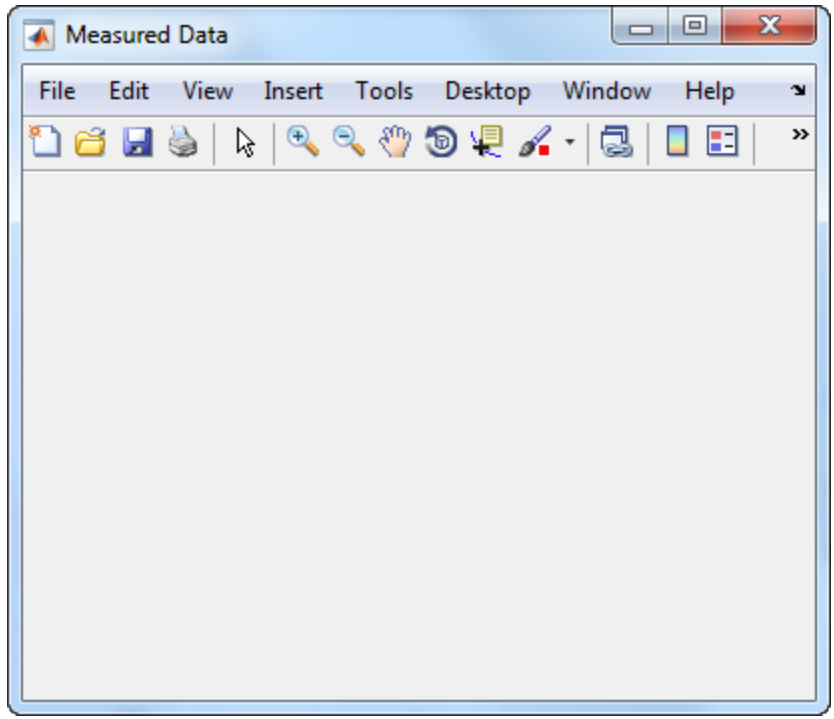

Working with Multiple Figures Simultaneously

Create two figures, and then create a line plot. By default, the `plot` command targets the current figure.

```
f1 = figure;
f2 = figure;
plot([1 2 3],[2 4 6]);
```

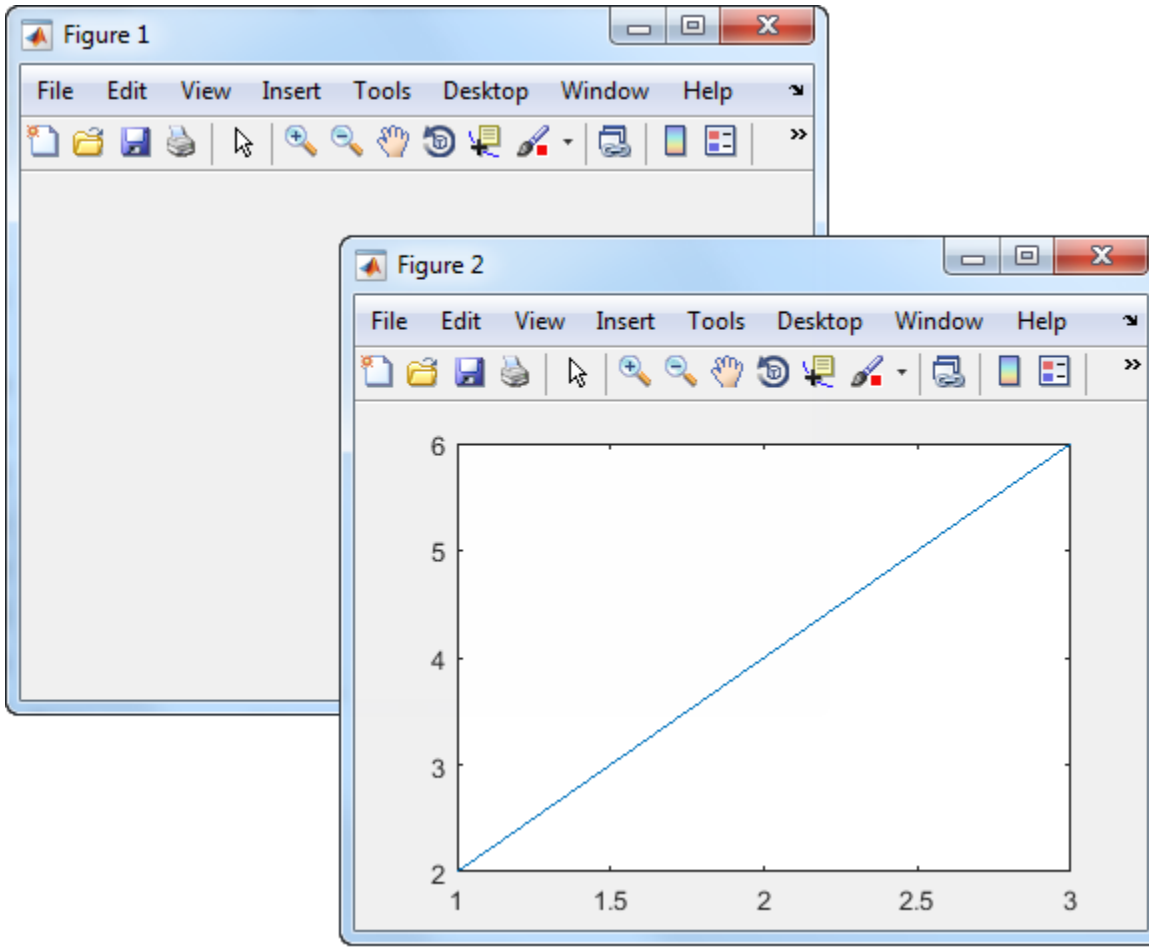

Set the current figure to `f1`, so that it is the target for the next plot. Then create a scatter plot.

```
figure(f1);
scatter((1:20),rand(1,20));
```

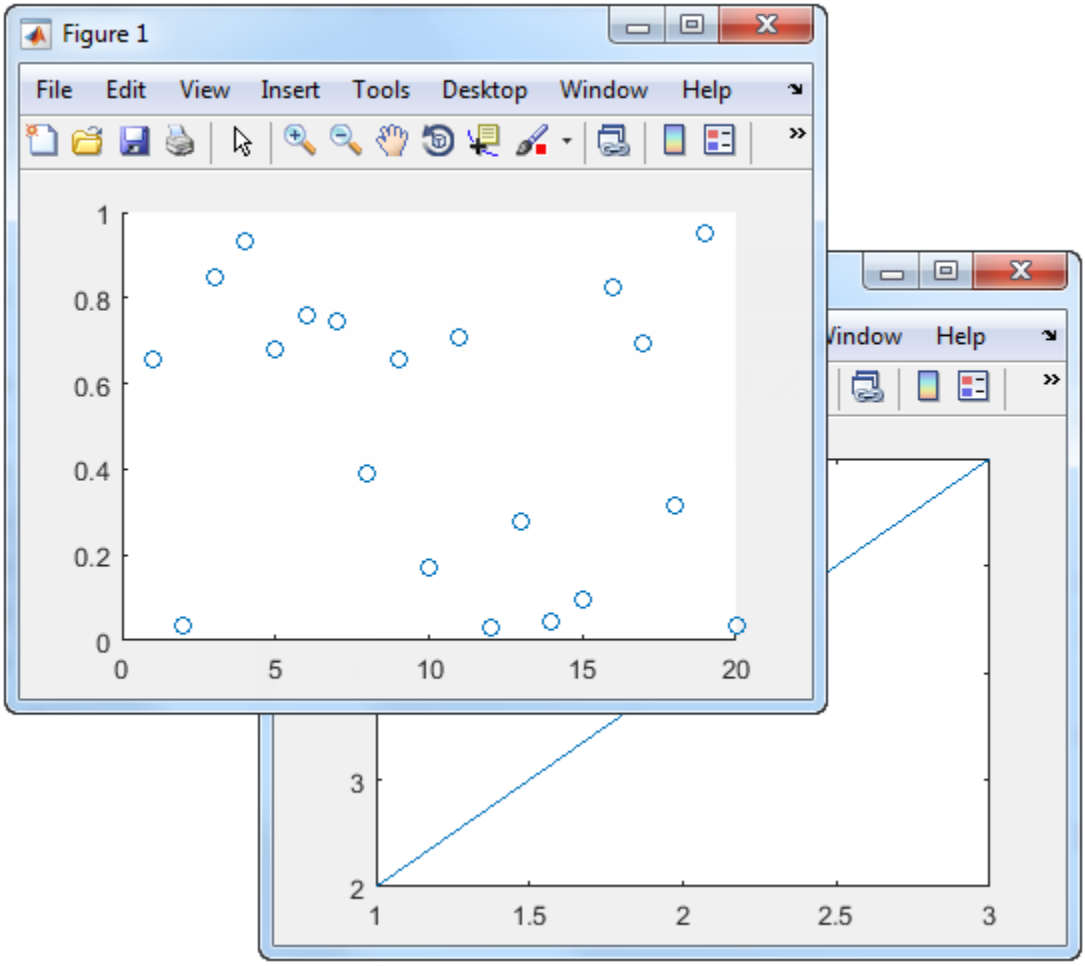

Input Arguments

f — Target figure

`Figure` object

Target figure, specified as a `Figure` object.

n — Target figure number

scalar integer value

Target figure number, specified as a scalar integer value. When you specify this argument, MATLAB searches for an existing figure in which the `Number` property is equal to `n`. If no figure exists with that property value, MATLAB creates a new figure and sets its `Number` property to `n`. By default, the `Number` property value is displayed in the title of the figure.

Data Types: `double`

Name-Value Pair Arguments

Example: `figure('Color','white')` creates a figure with a white background.

Note: The properties listed here are only a subset. For a full list, see Figure Properties.

`'Number'` — Figure number

integer | `[]`

This property is read-only.

Figure number, returned as an integer or empty array. You can refer to a figure using this value. For example, `figure(2)` makes the figure with a `Number` property value of 2 the current figure.

If the IntegerHandle property is set to `'off'`, `Number` is an empty array.

If `IntegerHandle` is `'on'`, the `Number` property value is an integer. If the `Figure` object is deleted, MATLAB reuses the number for the next figure.

`'Name'` — Figure name

`''` (default) | character vector

Figure name, specified as a character vector.

Example: `figure('Name','Results')` sets the figure name to `'Results'`.

By default, the name is `'Figure n'`, where *n* is an integer. When you specify the `Name` property, the title of the figure becomes `'Figure n: name'`. If you want only the `Name` value to appear, set IntegerHandle or NumberTitle to `'off'`.

`'Color'` — Background color

RGB triplet | short name | long name | `'none'`

Background color, specified as an RGB triplet, a predefined color name, or `'none'`. If you specify `'none'`, the background color appears black on screen, but if you print the figure, the background prints as though the figure window is transparent.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Data Types: `double` | `char`

`'Position'` — Location and size of drawable area

`[left bottom width height]`

Location and size of the drawable area, specified as a vector of the form `[left bottom width height]`. This area excludes the figure borders, title bar, menu bar, and tool bars.

This table describes each element in the `Position` vector.

Element	Description
`left`	Distance from the left edge of the primary display to the inner left edge of the figure window. This value can be negative on systems that have more than one monitor. If the figure is docked, then this value is relative to the Figure panel within the MATLAB desktop.

Element	Description
`bottom`	Distance from the bottom edge of the primary display to the inner bottom edge of the figure window. This value can be negative on systems that have more than one monitor. If the figure is docked, then this value is relative to the Figure panel within the MATLAB desktop.
`width`	Distance between the right and left inner edges of the figure.
`height`	Distance between the top and bottom inner edges of the figure.

All measurements are in units specified by the `Units` property.

You cannot specify the figure `Position` property when the figure is docked.

To place the full window, including the borders, title bar, menu bar, tool bars, use the OuterPosition property.

Note: The Windows operating system enforces a minimum window width and a maximum window size. If you specify a figure size outside of those limits, the displayed figure will conform to the limits instead of the size you specified.

`'Units'` — Units of measurement

`'pixels'` (default) | `'normalized'` | `'inches'` | `'centimeters'` | `'points'` | `'characters'`

Units of measurement, specified one of the values from this table.

Units Value	Description
`'pixels'` (default)	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch.

Units Value	Description
	• On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.
`'normalized'`	These units are normalized with respect to the parent container. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'points'`	Points. One point equals 1/72nd of an inch.
`'characters'`	These units are based on the default uicontrol font of the graphics root object: • Character width = width of the letter `x`. • Character height = distance between the baselines of two lines of text. To access the default uicontrol font, use `get(groot,'defaultuicontrolFontName')` or `set(groot,'defaultuicontrolFontName')`.

MATLAB measures all units from the lower left corner of the parent object.

This property affects the `Position` property. If you change the `Units` property, consider returning its value to the default value after completing your computation to avoid affecting other functions that assume the default value.

The order in which you specify the `Units` and `Position` properties has these effects:

- If you specify the `Units` before the `Position` property, then MATLAB sets `Position` using the units you specify.
- If you specify the `Units` property after the `Position` property, MATLAB sets the position using the default `Units`. Then, MATLAB converts the `Position` value to the equivalent value in the units you specify.

Definitions

Current Figure

The current figure is the target for graphics commands such as `axes` and `colormap`. Typically, it is the last figure created or the last figure clicked with the mouse. The `gcf` command returns the current figure.

See Also

See Also

Functions
`axes` | `cla` | `clf` | `gca` | `gcf`

Properties
Figure Properties

Introduced before R2006a

Figure Properties

Control appearance and behavior of figure window

Description

Figures are containers for graphics or user interface components. Figure properties control the appearance and behavior of a particular instance of a figure. To modify aspects of a figure, change property values.

Starting in R2014b, you can use dot notation to query and set properties.

```
fig = figure;
u = fig.Units;
fig.Units = 'inches';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Figure Appearance

`Color` — Background color

RGB triplet | short name | long name | `'none'`

Background color, specified as an RGB triplet, a predefined color name, or `'none'`. If you specify `'none'`, the background color appears black on screen, but if you print the figure, the background prints as though the figure window is transparent.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`

Long Name	Short Name	RGB Triplet
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Data Types: double | char

DockControls — Interactive figure docking

'on' (default) | 'off'

Interactive figure docking, specified as one of the following:

- 'on' — Figure can be docked in the MATLAB desktop. The **Desktop** > **Dock Figure** menu item and the Dock Figure button in the menu bar are enabled.
- 'off' — MATLAB disables the **Desktop** > **Dock Figure** menu item and does not display the figure dock button.

  You cannot set the DockControls property to 'off' if the WindowStyle is set to 'docked'.

MenuBar — Figure menu bar display

'figure' (default) | 'none'

Figure menu bar display, specified as 'figure' or 'none'. The MenuBar property enables you to display or hide the default menus at the top of a figure window. Specify 'figure' to display the menu bar. Specify 'none' to hide it.

This property affects only default menus, and does not affect menus defined with the uimenu command.

Menu bars do not appear in figures whose WindowStyle property is set to 'Modal'. If a figure containing uimenu children is changed to 'Modal', the uimenu children still exist in the Children property of the figure. However, the uimenus do not display while WindowStyle is set to 'Modal'.

Note: If you do not want to display the default menus in the figure, then set this property to 'none' when you create the figure.

`Name` — Figure name

`''` (default) | character vector

Figure name, specified as a character vector.

Example: `figure('Name','Results')` sets the figure name to `'Results'`.

By default, the name is `'Figure n'`, where *n* is an integer. When you specify the `Name` property, the title of the figure becomes `'Figure n: name'`. If you want only the `Name` value to appear, set IntegerHandle or NumberTitle to `'off'`.

`NumberTitle` — Include number in Figure title

`'on'` (default) | `'off'`

Include number in Figure title, specified as `'on'` or `'off'`. The `NumberTitle` property determines whether MATLAB includes the label `Figure` *n* in the title bar, where *n* is the figure Number property value.

If you set IntegerHandle to `'off'`, then a number does not display in the figure window title, regardless of the `NumberTitle` property setting.

`ToolBar` — Figure toolbar display

`'auto'` (default) | `'figure'` | `'none'`

Figure toolbar display, specified as one of the following:

- `'auto'` — Uses the same value as the MenuBar property.
- `'figure'` — Toolbar displays.
- `'none'` — Toolbar does not display.

This property affects only the default toolbar. It does not affect other toolbars such as, the Camera Toolbar or Plot Edit Toolbar. Selecting **Figure Toolbar** from the figure **View** menu sets this property to `'figure'`.

Toolbars do not appear in figures whose WindowStyle property is set to `'Modal'`. If a figure containing a toolbar is changed to `'Modal'`, the tool bar children still exist in the Children property of the figure. However, the toolbar does not display while `WindowStyle` is set to `'Modal'`.

Note: If you want to hide the default tool bar, then set this property to `'none'` when you create the figure.

`Visible` — Figure visibility

`'on'` (default) | `'off'`

Figure visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the figure displays on the screen. If the `Visible` property of a figure is set to `'off'`, the entire figure is invisible, but you can still specify and access its properties.

Changing the size of an invisible figure triggers the `SizeChangedFcn` callback when the figure becomes visible.

Note Changing the `Visible` property of a figure does *not* change the `Visible` property of its child components even though hiding the figure prevents its children from displaying.

`Clipping` — Clipping of child components to figure

`'on'` (default) | `'off'`

This property has no effect on figures.

Axes and Plot Appearance

`GraphicsSmoothing` — Axes graphics smoothing

`'on'` (default) | `'off'`

Axes graphics smoothing, specified as `'on'` or `'off'`. Smoothing reduces the appearance of jagged lines in an axes graphic. MATLAB applies a smoothing technique to an axes graphic (and the axes rulers) if GraphicsSmoothing is set to `'on'`, and either of these conditions is true:

- The Renderer property is set to `'painters'`.
- The `Renderer` property is set to `'opengl'` and your hardware card supports OpenGL.

If your axes graphic contains mostly vertical or horizontal lines, consider setting the `GraphicsSmoothing` property to `'on'` and the line or lines AlignVertexCenters property to `'on'`. The smoothing technique sacrifices some sharpness for smoothness, which might be particularly noticeable in such graphics.

Note: Graphics smoothing has no affect on text. MATLAB smooths text regardless of the value of the `GraphicsSmoothing` property.

`Renderer` — Rendering method used for screen display and printing

`'opengl'` (default) | `'painters'`

Rendering method used for screen display and printing, specified as one of these values:

- `'opengl'` — OpenGL renderer. This option enables MATLAB to access graphics hardware if it is available on your system. The OpenGL renderer displays objects sorted in front to back order, as seen on the monitor. Lines always draw in front of faces when at the same location on the plane of the monitor.
- `'painters'` — Painters renderer. This option works well for axes in a 2-D view. In 2-D, the Painters renderer sorts graphics objects by child order (order specified). In 3-D, the Painters renderer sorts objects in front to back order. However, it might not correctly draw intersecting polygons in 3-D.

Note: The `'zbuffer'` option has been removed. Use `'opengl'` or `'painters'` instead.

OpenGL Hardware and Software Implementations

OpenGL is available on all computers that run MATLAB since a software version of OpenGL is built-into MATLAB. However, if you have graphics hardware that supports a hardware-accelerated version of OpenGL, then MATLAB automatically uses the hardware-accelerated version to increase performance.

In some cases, MATLAB automatically uses software OpenGL even if a hardware version is available. For example, MATLAB uses the software version if it detects graphics hardware with known driver issues or detects that you are using a virtual machine or remote desktop on Windows.

MATLAB issues a warning if it cannot find a usable OpenGL library.

Software OpenGL Selection

To switch from hardware to software OpenGL, do the following:

- On Linux systems, start MATLAB with the command `matlab -softwareopengl`.
- On Windows systems, execute the command `opengl software` in MATLAB or start MATLAB with the command `matlab -softwareopengl`.
- On Macintosh systems, software OpenGL is not supported.

The following software versions are available:

- On Linux systems, MATLAB uses the software implementation of OpenGL that is included in the MATLAB distribution.
- On Windows, OpenGL is available as part of the operating system. If you experience problems with OpenGL, contact your graphics driver vendor to obtain the latest qualified version of OpenGL.
- On Macintosh systems, software OpenGL is not available.

Determine OpenGL Library Version

To determine the version and vendor of the OpenGL library that MATLAB is using on your system, type the following command at the MATLAB prompt:

```
opengl info
```

The returned information contains a line that indicates if MATLAB is using software OpenGL (`Software = true`) or hardware-accelerated OpenGL (`Software = false`).

This command also returns a list of extensions to the OpenGL specification that are available with the particular library MATLAB is using. Include this information if you report a bug.

Be aware that issuing the `opengl info` command causes MATLAB to initialize OpenGL.

XServer Connection Lost

When using Linux, if there is a break in the connection to the XServer, MATLAB can crash with a segmentation violation . If this happens, ensure that the system has the latest XServer installed.

On a Linux system, you also can try upgrading the OpenGL driver or starting MATLAB with software OpenGL using this command:

```
matlab -softwareopengl
```

RendererMode — Renderer selection

'auto' (default) | 'manual'

Renderer selection, specified as:

- 'auto' — MATLAB selects the rendering method for printing and screen display based on the size and complexity of the graphics objects in the figure.
- 'manual' — MATLAB uses the renderer specified with the Renderer property.

MATLAB sets the RendererMode property to 'manual' if you explicitly set the Renderer property to 'painters' or 'opengl'.

Color and Transparency Mapping

Alphamap — Transparency map for Axes content

array of 64 values from 0 to 1 (default) | array of finite alpha values from 0 to 1

Transparency map for Axes content, specified as an array of finite alpha values that progress linearly from 0 to 1. The size of the array can be m-by-1 or 1-by-m. MATLAB accesses alpha values by their index in the vector. Alphamaps can be any length.

Alphamaps affect the rendering of objects created with the surface, image, and patch functions, but do not affect other graphics objects.

Colormap — Color map for axes content of figure

parula (default) | m-by-3 array of RGB triplets

Color map for axes content of a figure, specified as an m-by-3 array of RGB (red, green, blue) triplets that define m individual colors.

Example: figure('Colormap',[1 0 1; 0 0 1; 1 1 0]) sets the color map to three colors: magenta, blue, and yellow.

MATLAB accesses these colors by their row number.

Color maps affect the rendering of objects created with the surface, image, and patch functions, but generally do not affect other graphics objects.

Location and Size

`Position` — Location and size of drawable area

`[left bottom width height]`

Location and size of the drawable area, specified as a vector of the form `[left bottom width height]`. This area excludes the figure borders, title bar, menu bar, and tool bars.

This table describes each element in the `Position` vector.

Element	Description
`left`	Distance from the left edge of the primary display to the inner left edge of the figure window. This value can be negative on systems that have more than one monitor. If the figure is docked, then this value is relative to the Figure panel within the MATLAB desktop.
`bottom`	Distance from the bottom edge of the primary display to the inner bottom edge of the figure window. This value can be negative on systems that have more than one monitor. If the figure is docked, then this value is relative to the Figure panel within the MATLAB desktop.
`width`	Distance between the right and left inner edges of the figure.
`height`	Distance between the top and bottom inner edges of the figure.

All measurements are in units specified by the `Units` property.

You cannot specify the figure `Position` property when the figure is docked.

To place the full window, including the borders, title bar, menu bar, tool bars, use the OuterPosition property.

Note: The Windows operating system enforces a minimum window width and a maximum window size. If you specify a figure size outside of those limits, the displayed figure will conform to the limits instead of the size you specified.

`OuterPosition` — Location and size of outer bounds

`[left bottom width height]`

Location and size of the outer bounds, specified as a vector of the form `[left bottom width height]`. This property defines the region enclosed by the figure's outer bounds (which includes the borders, title bar, menu bar, and tool bars).

This table describes each element in the vector.

Element	Description
`left`	Distance from the left edge of the primary display to the outer left edge of the figure window. This value can be negative on systems that have more than one monitor. If the figure is docked, then this value is relative to the Figure panel within the MATLAB desktop.
`bottom`	Distance from the bottom edge of the primary display to the outer bottom edge of the figure window. This value can be negative on systems that have more than one monitor. If the figure is docked, then this value is relative to the Figure panel within the MATLAB desktop.
`width`	Distance between the right and left outer edges of the figure.
`height`	Distance between the top and bottom outer edges of the figure.

All measurements are in units specified by the `Units` property.

You cannot specify the figure `OuterPosition` property when the figure is docked.

Note: The Windows operating system enforces a minimum window width and a maximum window size. If you specify a figure size outside of those limits, the displayed figure will conform to the limits instead of the size you specified.

`InnerPosition` — Location and size of drawable area

`[left bottom width height]`

Location and size of the drawable area, specified as a vector of the form `[left bottom width height]`. This area excludes the figure borders, title bar, menu bar, and tool bars. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` property value.

`Units` — Units of measurement
`'pixels'` (default) | `'normalized'` | `'inches'` | `'centimeters'` | `'points'` | `'characters'`

Units of measurement, specified one of the values from this table.

Units Value	Description
`'pixels'` (default)	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.
`'normalized'`	These units are normalized with respect to the parent container. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'points'`	Points. One point equals 1/72nd of an inch.
`'characters'`	These units are based on the default uicontrol font of the graphics root object: • Character width = width of the letter `x`. • Character height = distance between the baselines of two lines of text. To access the default uicontrol font, use `get(groot,'defaultuicontrolFontName')`

Units Value	Description
	or `set(groot,'defaultuicontrolFontName')`.

MATLAB measures all units from the lower left corner of the parent object.

This property affects the `Position` property. If you change the `Units` property, consider returning its value to the default value after completing your computation to avoid affecting other functions that assume the default value.

The order in which you specify the `Units` and `Position` properties has these effects:

- If you specify the `Units` before the `Position` property, then MATLAB sets `Position` using the units you specify.
- If you specify the `Units` property after the `Position` property, MATLAB sets the position using the default `Units`. Then, MATLAB converts the `Position` value to the equivalent value in the units you specify.

`Resize` — Window resize mode

`'on'` (default) | `'off'`

Window resize mode, specified as:

- `'on'` — Users can resize the figure window.
- `'off'` — Users cannot resize the figure window. The figure window does not display any resizing controls.

`SizeChangedFcn` — Size change callback function

`''` (default) | function handle | cell array | character vector

Size change callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Define this callback to customize the app layout when the size of this container changes (e.g., when the user resizes the window).

The `SizeChangedFcn` callback executes when:

- This container becomes visible for the first time.
- This container is visible while its size changes.
- This container becomes visible for the first time after its size changes. This situation occurs when the size changes while the container is invisible, and then it becomes visible later.

Other important points to consider when defining a `SizeChangedFcn` callback:

- Consider delaying the display of this container until after all the variables that the `SizeChangedFcn` uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the container, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- If your app contains nested containers, they resize from the inside out.
- To access the container that is resizing from within the `SizeChangedFcn`, refer to the source object (the first input argument in the callback) or use the `gcbo` function.

Tip: As an easy alternative to specifying a `SizeChangedFcn` callback, you can set the `Units` property of all the objects you put inside a container to `'normalized'`. Doing so makes those components scale proportionally with the container.

Example: Edit Field With Constant Height

Use the `SizeChangedFcn` callback to constrain the size of UI components. For instance, the following code creates a UI that has an edit field at the top of the window. As the user resizes the window, the `sbar` function restricts its height to 20 pixels. The function also sets the edit field's width to the width of the figure.

If you are using R2014b or later, use dot notation to set and query properties:

```
function myui
f = figure('Visible','off','SizeChangedFcn',@sbar);
u = uicontrol('Style','edit','Tag','StatusBar');
f.Visible = 'on';
    function sbar(src,callbackdata)
```

```
        old_units = src.Units;
        src.Units = 'pixels';
        sbar_units = u.Units;
        u.Units = 'pixels';
        fpos = src.Position;
        upos = [1 fpos(4) - 20 fpos(3) 20];
        u.Position = upos;
        u.Units = sbar_units;
        src.Units = old_units;
        u.Visible = 'on';
    end
end
```

If you are using R2014a or an earlier release, use this code instead.

```
function myui
f = figure('Visible','off','SizeChangedFcn',@sbar);
u = uicontrol('Style','edit','Tag','StatusBar');
set(f,'Visible','on');
    function sbar(src,callbackdata)
        old_units = get(src,'Units');
        set(src,'Units','pixels');
        sbar_units = get(u,'Units');
        set(u,'Units','pixels');
        fpos = get(src,'Position');
        upos = [1 fpos(4) - 20 fpos(3) 20];
        set(u,'Position',upos);
        set(u,'Units',sbar_units);
        set(src,'Units',old_units);
        set(u,'Visible','on');
    end
end
```

Data Types: `function_handle` | `cell` | `char`

`ResizeFcn` — Figure resize callback function

`''` (default) | function handle | cell array | character vector

Callback function that executes when the figure size changes, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.

- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Note: Use of the `ResizeFcn` property is not recommended. It might be removed in a future release. Use `SizeChangedFcn` instead.

Data Types: `function_handle` | `cell` | `char`

Multiple Plots

`NextPlot` — Directive on how to add next plot

`'add'` (default) | `'new'` | `'replace'` | `'replacechildren'`

Directive on how to add next plot, specified as `'add'`, `'new'`, `'replace'`, or `'replacechildren'`.

This table describes the effects of each value.

Property Value	Effect
`'new'`	Creates a new figure and uses it as the current figure.
`'add'`	Adds new graphics objects without clearing or resetting the current figure.
`'replacechildren'`	Removes all axes objects who are not hidden before adding new objects. Does not reset figure properties. Equivalent to using the `clf` command.
`'replace'`	Removes all axes objects and resets figure properties to their defaults before adding new graphics objects. Equivalent to using the `clf reset` command.

Consider using the `newplot` function to handle the `NextPlot` property. For more information, see the axes NextPlot property and “Prepare Figures and Axes for Graphs”.

Interactive Control

`Selected` — Selection status of figure

`'off'` (default) | `'on'`

Note: The behavior of the `Selected` property changed in R2014b, and it is not recommended. It no longer has any effect on figures. This property might be removed in a future release.

`SelectionHighlight` — Ability of figure to highlight when user selects it

`'on'` (default) | `'off'`

Note: Use of the figure `SelectionHighlight` property is not recommended. This property might be removed in a future release.

This property has no effect on figures.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

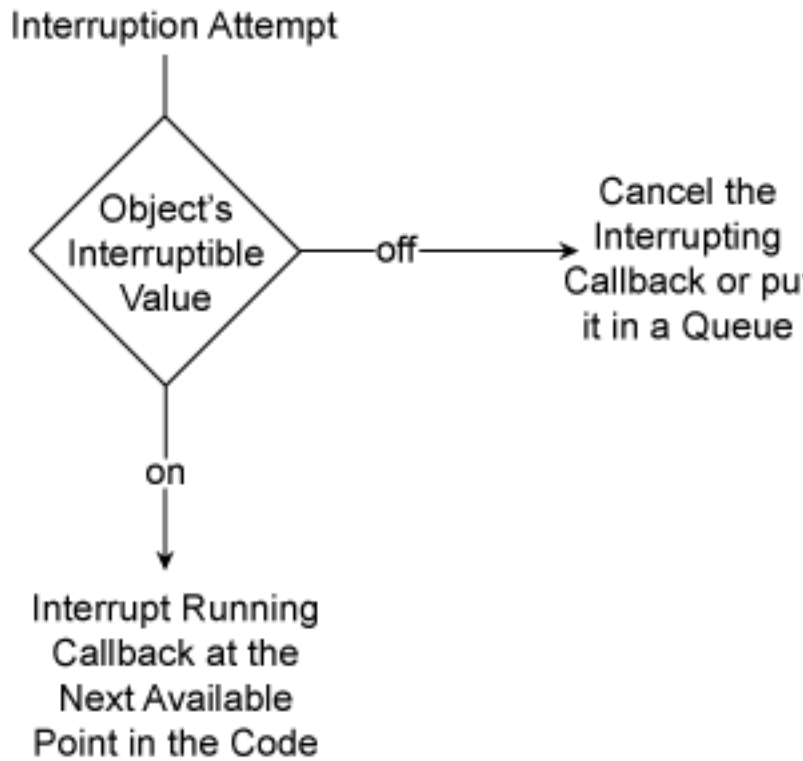

If a figure callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See "Interrupt Callback Execution" for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.

- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

`HitTest` — Ability to become current object

`'on'` (default) | `'off'`

Ability to become current object, specified as `'on'` or `'off'`:

- Setting the value to `'on'` allows the figure to become the current object when the user clicks on it. A value of `'on'` also allows the figure `CurrentObject` property and the `gco` function to report the figure as the current object.
- Setting the value to `'off'` sets the figure `CurrentObject` property to an empty `GraphicsPlaceholder` array when the user clicks on the figure.

Keyboard Control

`CurrentCharacter` — Last key pressed in figure

`''` (default) | character

The last key pressed in the figure, returned as a character. Use the `CurrentCharacter` property to obtain user input.

`KeyPressFcn` — Key-press callback function

`''` (default) | function handle | cell array | character vector

The callback function that executes when a user presses a key, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Example: `figure('KeyPressFcn',@myfun)` specifies the key-press callback function as a function handle.

Example: `figure('KeyPressFcn',{@myfun,x})` specifies the key-press callback function as a cell array. In this case, the function accepts the input argument, `x`.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback function executes when the figure window has focus and the user presses a key. If you do not define a function for this property, MATLAB passes key presses to the Command Window. Repeated key presses retain the focus of the figure, and the function executes with each key press. If the user presses multiple keys at approximately the same time, MATLAB detects the key press for the last key pressed.

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes an object containing callback data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation.

Property	Contents
`Character`	The character that displays as a result of pressing the key or keys. The character can be empty or unprintable.
`Modifier`	A cell array containing the names of one or more modifier keys that are being pressed (such as , **control**, **alt**, **shift**). On Macintosh computers, the cell array contains `'command'` when the **command** modifier key is pressed.
`Key`	The key being pressed, identified by the (lowercase) label on the key, or a descriptive word.
`Source`	The object that has focus when the user presses the key.
`Eventname`	The action that caused the callback function to execute.

Pressing modifier keys affects the callback data in the following ways:

- Modifier keys can affect the `Character` property, but do not change the `Key` property.
- Certain keys, and keys modified with **Ctrl**, put unprintable characters in the `Character` property.
- **Ctrl**, **Alt**, **Shift**, and several other keys, do not generate `Character` property data.

You also can query the `CurrentCharacter` property of the figure to determine which character the user pressed.

`KeyReleaseFcn` — Key-release callback function

`''` (default) | function handle | cell array | character vector

Key release callback function, specified as one of these values

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Example: `figure('KeyReleaseFcn',@myfun)` specifies the key-release callback function as a function handle.

Example: `figure('KeyReleaseFcn',{@myfun,x})` specifies the key-release callback function as a cell array. In this case, the function accepts the input argument, `x`.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see “How to Specify Callback Property Values”.

This callback function executes when the figure object has focus and the user releases a key.

Note: The triggering behavior of this callback depends on how your operating system responds to key release events.

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes an object containing callback data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation.

Property	Description	Examples:			
		a	=	Shift	Shift-a
`Character`	Character interpretation of the key that was released.	`'a'`	`'='`	`''`	`'A'`
`Modifier`	Current modifier, such as `'control'`, or an empty cell array if there is no modifier	`{1x0 cell}`	`{1x0 cell}`	`{'shift'`	`{'shift'}`
`Key`	The key being released, identified by the (lowercase) label on the key, or a descriptive word.	`'a'`	`'equal'`	`'shift'`	`'a'`
`Source`	The object that has focus when the user presses the key.	figure	figure	figure	figure
`Eventname`	The action that caused the callback function to execute.	`'KeyRel`	`'KeyRel`	`'KeyRele`	`'KeyRelease'`

Pressing modifier keys affects the callback data in the following ways:

- Modifier keys can affect the `Character` property, but do not change the `Key` property.
- Certain keys, and keys modified with **Ctrl**, put unprintable characters in the `Character` property.
- **Ctrl**, **Alt**, **Shift**, and several other keys, do not generate `Character` property data.

You can also query the `CurrentCharacter` property of the figure to determine which character the user pressed.

`WindowKeyPressFcn` — Key-press callback function for the figure window

`''` (default) | function handle | cell array | character vector

Key-press callback function for the figure window, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Example: `figure('WindowKeyPressFcn',@myfun)` specifies the key-press callback function as a function handle.

Example: `figure('WindowKeyPressFcn',{@myfun,x})` specifies the key-press callback function as a cell array. In this case, the function accepts the input argument, `x`.

For more information about writing callback functions and specifying them as property values, see "How to Specify Callback Property Values".

The `WindowKeyPressFcn` callback executes whenever a key press occurs while the figure (or any of its children) has focus.

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes an object containing callback data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation.

Property	Contents
`Character`	The character displayed as a result of pressing the key. The character which can be empty or unprintable
`Modifier`	A cell array containing the names of one or more modifier keys being pressed (such as **control**, **alt**, **shift**). On Macintosh computers, it contains `'command'` when pressing the **command** modifier key.
`Key`	The key being pressed, identified by the (lowercase) label on the key, or a descriptive word.
`Source`	The object that has focus when the user presses the key.
`Eventname`	The action that caused the callback function to execute.

`WindowKeyReleaseFcn` — Key-release callback function for the figure window

`''` (default) | function handle | cell array | character vector

Key-release callback function for the figure window, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Example: `f = figure('WindowKeyReleaseFcn',@myfun)` specifies the key-release callback function as a function handle.

Example: `f = figure('WindowKeyReleaseFcn',{@myfun,x})` specifies the key-release callback function as a cell array. In this case, the function accepts the input argument, `x`.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback executes whenever a key release occurs while the figure window or any of its children has focus.

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes an object containing callback data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation.

Property	Contents
`Character`	The character displayed as a result of the releasing the key or keys. The character which can be empty or unprintable.
`Modifier`	A cell array containing the names of one or more modifier keys being released (such as **control**, **alt**, **shift**). On Macintosh computers, it contains `'command'` when releasing the **command** modifier key.
`Key`	The key being released, identified by the (lowercase) label on the key, or a descriptive word.
`Source`	The object that has focus when the user releases the key.
`Eventname`	The action that caused the callback function to execute.

Mouse Control

`ButtonDownFcn` — Button-press callback function

`''` (default) | function handle | cell array | character vector

Button-press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.

- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback executes whenever the user clicks a mouse button while the pointer is in the figure window, but not over a child object such as a uicontrol, uipanel, axes, or axes child.

See the figure's SelectionType property to determine whether modifier keys are also pressed.

`CurrentPoint` — Location of mouse pointer
two-element vector

Location of mouse pointer, returned as a two-element vector. The `CurrentPoint` property contains the coordinates (x, y) of the mouse pointer, measured from the lower left corner of the figure (in units determined by the `Units` property).

The coordinates indicate the location of the last mouse click, unless there is a WindowButtonMotionFcn callback defined for the figure. If the `WindowButtonMotionFcn` callback is defined, then the coordinates indicate the last location of the mouse pointer.

Note: If you use the values returned by the `CurrentPoint` property to plot points, the coordinate values might contain rounding error.

CurrentPoint and Cursor Motion

MATLAB updates `CurrentPoint` before executing callback functions defined for the figure WindowButtonMotionFcn and WindowButtonUpFcn properties. This enables you to query `CurrentPoint` from these callback functions. It behaves like this:

- If you define a callback function for the WindowButtonMotionFcn property or the WindowButtonUpFcn property, then MATLAB updates the `CurrentPoint` property only when the user presses the mouse button within the figure window.
- If you define a callback function for the `WindowButtonMotionFcn` property, then MATLAB updates the `CurrentPoint` property just before executing the callback.

The `WindowButtonMotionFcn` property executes only within the figure window, unless the user presses the mouse button within the figure and *keeps the mouse button down* while moving the pointer around the screen. In this case, the function executes (and MATLAB updates the `CurrentPoint` property) anywhere on the screen until the user releases the mouse button.

- If you define a callback function for the `WindowButtonUpFcn` property, then MATLAB updates the `CurrentPoint` property just before executing the callback. The `WindowButtonUpFcn` callback executes only while the pointer is within the figure window, unless the user presses the mouse button within the window and *releases the mouse button* anywhere on the screen. In this case, the function executes, preceded by an update of the `CurrentPoint` property value.
- If you add a uicontrol or uitable component to the figure, then MATLAB updates the `CurrentPoint` property when the user right-clicks the component, or when they left-click the component while the `Enable` property of that component is `'off'` or `'inactive'`.

In some situations (such as when the `WindowButtonMotionFcn` callback takes a long time to execute and the user moves the pointer very rapidly), the `CurrentPoint` property might not reflect the actual location of the pointer, but rather the location at the time when the `WindowButtonMotionFcn` callback began execution.

The root PointerLocation property contains the location of the pointer updated synchronously with pointer movement. However, the location is measured with respect to the screen, not a figure window.

`SelectionType` — Mouse selection type

`'normal'` (default) | `'extend'` | `'alt'` | `'open'`

Mouse selection type, returned as `'normal'`, `'extend'` , `'alt'` , or `'open'`. MATLAB maintains this property to provide information about the last mouse-button press that occurred within the figure window. This information indicates the type of selection made. Selection types are actions that MATLAB generally associates with particular responses from the user interface software (for example, single-clicking a graphics object places it in move or resize mode; double-clicking a file name opens it, and so on).

The value of this property depends on the type of mouse click and the user's operating system.

Selection Type	Microsoft Windows	Linux	Mac
`'normal'`	Click left mouse button.	Click left mouse button.	Click left mouse button.

Selection Type	Microsoft Windows	Linux	Mac
`'extend'`	Either of the following: • **Shift**-click left mouse button. • Click both left and right mouse buttons.	Either of the following: • **Shift**-click left mouse button. • Click middle mouse button.	Any one of the following: • **Shift**-click left mouse button. • Click middle mouse button. • Click both left and right mouse buttons.
`'alt'`	**Control**-click left mouse button or click right mouse button.	**Control**-click left mouse button or click right mouse button.	**Control**-click left mouse button or click right mouse button.
`'open'`	Double-click any mouse button.	Double-click any mouse button.	Double-click any mouse button.

Note: For a list box (uicontrol), the second click of a double-click sets the `SelectionType` property to `'open'`.

`WindowButtonDownFcn` — Button-press callback function

`''` (default) | function handle | cell array | character vector

Button press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Example: `figure('WindowButtonDownFcn',@myfun)` specifies the button-press callback function as a function handle.

Example: `figure('WindowButtonDownFcn',{@myfun,x})` specifies the button-press callback function as a cell array. In this case, the function accepts the input argument, `x`.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback executes before all other `ButtonDownFcn` callbacks within the figure.

Note: When using a two-button or three-button mouse on Macintosh systems, right-button and middle-button presses are not always reported. This happens *only* when a new figure window appears under the mouse cursor and the user clicks the mouse without first moving the mouse. In this circumstance, for the `WindowButtonDownFcn` callback to work, the user needs to do one of the following:

- Move the mouse after the figure is created, and then click any mouse button.
- Press **Shift** or **Ctrl** while clicking the left mouse button to perform the Extend and Alternate selection types.

Pressing the left mouse button (or single mouse button) works without having to take either of the above actions.

For information on how callbacks interact, see the `Interruptible` and `BusyAction` properties.

`WindowButtonMotionFcn` — Mouse-motion callback function

`''` (default) | function handle | cell array | character vector

Mouse-motion callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback function executes whenever the user moves the pointer within the figure window.

Note: On some systems, the `WindowButtonMotionFcn` callback executes when MATLAB creates a figure, even though there has been no mouse motion within the figure.

Your callback functions might need to update the display by calling the `drawnow` or `pause` function, which causes MATLAB to process all callbacks in the queue. Processing the callback queue can cause your callback function to be reentered. Design your code to handle reentrancy and do not depend on global variables that might change state during reentrance.

For information on how callbacks interact, see the `Interruptible` and `BusyAction` properties.

Example: Coding Window Button Callback Functions

This example shows how to code all three window button callback functions so that the user can draw lines using mouse motions.

Copy and save the following code to a file on a writable folder on your system. Then, run the code. Click the left mouse button in the axes and move the cursor. Left-click to define the line end point. Right-click to end drawing mode.

```
function window_motion_test
figure('WindowButtonDownFcn',@wbdcb)
ah = axes('SortMethod','childorder');
axis ([1 10 1 10])
title('Click and drag')
   function wbdcb(src,callbackdata)
     seltype = src.SelectionType;
     % This code uses dot notation to set properties
     % Dot notation runs in R2014b and later.
     % For R2014a and earlier: seltype = get(src,'SelectionType');
     if strcmp(seltype,'normal')
        src.Pointer = 'circle';
        cp = ah.CurrentPoint;
        % For R2014a and earlier:
        % set(src,'Pointer','circle');
        % cp = get(ah,'CurrentPoint');
        xinit = cp(1,1);
        yinit = cp(1,2);
        hl = line('XData',xinit,'YData',yinit,...
```

```
        'Marker','p','color','b');
        src.WindowButtonMotionFcn = @wbmcb;
        src.WindowButtonUpFcn = @wbucb;
        % For R2014a and earlier:
        % set(src,'WindowButtonMotionFcn',@wbmcb);
        % set(src,'WindowButtonUpFcn',@wbucb);

    end

        function wbmcb(src,callbackdata)
           cp = ah.CurrentPoint;
           % For R2014a and earlier:
           % cp = get(ah,'CurrentPoint');
           xdat = [xinit,cp(1,1)];
           ydat = [yinit,cp(1,2)];
           hl.XData = xdat;
           hl.YData = ydat;
           % For R2014a and earlier:
           % set(hl,'XData',xdat);
           % set(hl,'YData',ydat);
           drawnow
        end

        function wbucb(src,callbackdata)
           last_seltype = src.SelectionType;
           % For R2014a and earlier:
           % last_seltype = get(src,'SelectionType');
           if strcmp(last_seltype,'alt')
              src.Pointer = 'arrow';
              src.WindowButtonMotionFcn = '';
              src.WindowButtonUpFcn = '';
              % For R2014a and earlier:
              % set(src,'Pointer','arrow');
              % set(src,'WindowButtonMotionFcn','');
              % set(src,'WindowButtonUpFcn','');
           else
              return
           end
        end
  end
end
```

`WindowButtonUpFcn` — Button-release callback function

`''` (default) | function handle | cell array | character vector

Button-release callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Example: `figure('WindowButtonUpFcn',@myfun)` specifies the button-release callback function as a function handle.

Example: `figure('WindowButtonUpFcn',{@myfun,x})` specifies the button-release callback function as a cell array. In this case, the function accepts the input argument, `x`.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback function executes whenever a user releases a mouse button.

The button-up callback is associated with the figure window in which a previous button-down action occurred. Therefore, the pointer need not be in the figure window when the user releases the button to generate the button-up callback.

If the callback functions defined by the WindowButtonDownFcn or WindowButtonMotionFcn properties contain `drawnow` commands or call other functions that contain `drawnow` commands and the Interruptible property is set to `'off'`, then the `WindowButtonUpFcn` callback might not be called. You can prevent this situation by setting the `Interruptible` property to `'on'`.

Your callback functions might need to update the display by calling the `drawnow` or `pause` function, which causes MATLAB to process all callbacks in the queue. Processing the queue can cause your callback function to be reentered. For example, a `drawnow` command in the `WindowButtonUpFcn` callback might result in the `WindowButtonUpFcn` callback being called again before the first call has finished. Design your code to handle reentrancy and do not depend on global variables that might change state during reentrance.

You can use the `Interruptible` and `BusyAction` figure properties to control how callbacks interact.

`WindowScrollWheelFcn` — Mouse-scroll-wheel callback

`''` (default) | function handle | cell array | character vector

Mouse-scroll-wheel callback, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback executes when the user moves the mouse-scroll-wheel while the figure has focus. MATLAB executes the callback with each single mouse-scroll-wheel click.

Be aware that it is possible for another object to capture the mouse-scroll-wheel movement from MATLAB. For example, if the figure contains Java or ActiveX control objects that are listening for mouse-scroll-wheel movements, then these objects can capture the activity and prevent the `WindowScrollWheelFcn` callback from executing.

WindowScrollWheelFcn Callback Data

When the callback is a function handle (or cell array containing a function handle), MATLAB passes an object containing callback data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation.

Property	Contents
`VerticalScrollCount`	A positive or negative integer that indicates the number of mouse-scroll-wheel clicks. Positive values indicate clicks of the wheel scrolled in the down direction. Negative values indicate clicks of the wheel scrolled in the up direction.
`VerticalScrollAmount`	The current system setting for the number of lines that are scrolled for each click of the scroll wheel. If the mouse property setting for scrolling is set to `One screen at a time`, the `VerticalScrollAmount` property is `1`.

Effects on Other Properties

The `WindowScrollWheelFcn` property value has the following effects on these properties:

- CurrentObject property — The `WindowScrollWheelFcn` property has no effect on the `CurrentObject` property.
- CurrentPoint property — If there is no callback defined for the `WindowScrollWheelFcn` property, then MATLAB does not update the `CurrentPoint` property as the user turns the scroll wheel. However, if there is a callback defined for the `WindowScrollWheelFcn` property, then MATLAB updates the `CurrentPoint` property just before executing the callback. This enables you to determine the point at which the mouse scrolling occurred.
- SelectionType property — The `WindowScrollWheelFcn` property has no effect on the `SelectionType` property.

Values Returned by VerticalScrollCount

When a user moves the mouse scroll wheel by one click, MATLAB increments the count by +/- 1, depending on the direction of the scroll (scroll down being positive). When MATLAB calls the `WindowScrollWheelFcn` callback, the counter resets. In most cases, this means that the absolute value of the returned value is 1. However, if the `WindowScrollWheelFcn` callback takes a long enough time to return or the user spins the scroll wheel very fast, or both, then the returned value can have an absolute value greater than one.

The actual value returned by `VerticalScrollCount` property is the algebraic sum of all mouse-scroll-wheel clicks that occurred since last processed. This enables your callback to respond correctly to the user action.

Example: Code WindowScrollWheelFcn Callback

This example creates a graph and enables users to use the mouse scroll wheel to change the range over which MATLAB evaluates a mathematical function. In addition, it updates the graph to reflect the new limits as the user turns the scroll wheel.

Copy and save the function to a writable folder on your system. Then, run the code. Mouse over the figure and scroll your mouse wheel.

```
function scroll_wheel
% Illustrates how to use WindowScrollWheelFcn property
%
   f = figure('WindowScrollWheelFcn',@figScroll,'Name','Scroll Wheel Demo');
   x = [0:.1:40];
   y = 4.*cos(x)./(x+2);
   a = axes;
   h = plot(x,y);
   title('Rotate the scroll wheel')
   function figScroll(src,callbackdata)
      if callbackdata.VerticalScrollCount > 0
         xd = h.XData;
         % This code uses dot notation to set properties
         % Dot notation runs in R2014b and later.
         % For R2014a and earlier: xd = get(h,'XData');
         inc = xd(end)/20;
         x = [0:.1:xd(end)+inc];
         re_eval(x)
      elseif callbackdata.VerticalScrollCount < 0
         xd = h.XData;
         % For R2014a and earlier: xd = get(h,'XData');
         inc = xd(end)/20;
         x = [0:.1:xd(end)-inc+.1]; % Don't let xd = 0;
         re_eval(x)
      end
   end

   function re_eval(x)
      y = 4.*cos(x)./(x+2);
      h.YData = y;
      h.XData = x;
      a.XLim = [0 x(end)];
      % For R2014a and earlier:
      % set(h,'YData',y);
      % set(h,'XData',x);
      % set(a,'XLim',[0 x(end)]);
      drawnow
   end
end
```

`UIContextMenu` — Figure context menu

empty `GraphicsPlaceholder` array (default) | uicontextmenu object

Figure context menu, specified as a uicontextmenu object. Use this property to display a context menu when the user right-clicks on the figure. Create the context menu using the `uicontextmenu` function.

Window Control

`CloseRequestFcn` — Figure close request callback function

`'closereq'` (default) | function handle | cell array | character vector

Figure close request callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback executes whenever a user attempts to close a figure window. You can, for example, display a dialog box to ask a user to confirm or cancel the close operation or to prevent users from closing a figure that contains a UI.

The basic mechanism is:

1. A user issues the `close` or `close all` command from the command line, closes the figure from the computer window manager menu, or closes the figure by quitting MATLAB.
2. The close operation executes the function defined by the figure `CloseRequestFcn` property. The default function is `closereq`.

   The `closereq` function unconditionally deletes the current figure, destroying the window. The `closereq` function takes advantage of the fact that the `close` command makes each figure specified as an argument the current figure before calling its respective close request function.

The `closereq` function honors the `ShowHiddenHandles` property setting during figure deletion and does not delete hidden figures.

Unless the close request function calls the `delete` or `close` function, MATLAB never closes the figure. (You can call `delete(f)` from the command line if you have created a window with a nondestructive close request function.)

Example: Code CloseRequestFcn to Display Dialog Box

This example shows how to code the close request function to display a question dialog box asking the user to confirm the close operation. Save the code to a writable folder on your system.

```
function my_closereq(src,callbackdata)
% Close request function
% to display a question dialog box
   selection = questdlg('Close This Figure?',...
      'Close Request Function',...
      'Yes','No','Yes');
   switch selection,
      case 'Yes',
         delete(gcf)
      case 'No'
      return
   end
end
```

Now, create a figure specifying `my_closereq` for the `CloseRequestFcn`:

```
figure('CloseRequestFcn',@my_closereq)
```

Close the figure window and the question dialog box displays.

`WindowStyle` — Figure window behavior

`'normal'` (default) | `'modal'` | `'docked'`

Figure window behavior, specified as one of the following:

- `'normal'` — The figure window is independent of other windows, and the other windows are accessible while the figure is displaying.
- `'modal'` — The figure displays on top of all existing figure windows, making them inaccessible as long as the top figure exists and remains modal. However, any new figures created after a modal figure will display.

  When multiple modal windows exist, the most recently created window keeps focus and stays above all other windows until it becomes invisible, or is returned to a normal window style, or is deleted. At that time, focus reverts to the window that last had focus.

- `'docked'` — The figure displays in the desktop or a document window. When the `WindowStyle` property is set to `'docked'`, you cannot set the `DockControls` property to `'off'`.

Note: These are some important characteristics of the `WindowStyle` property and some recommended best practices:

- When you create UI windows, always specify the `WindowStyle` property. If you also want to set the `Resize`, `Position`, or `OuterPosition` properties of the figure, then set the `WindowStyle` property first.

- You can change the `WindowStyle` property of a figure at any time, including when the figure is visible and contains children. However on some systems, setting this property might cause the figure to flash or disappear and reappear, depending on the system's implementation of normal and modal windows. For best visual results, set the `WindowStyle` property at creation time or when the figure is invisible.
- Calling `reset` on a figure does not change the value of the `WindowStyle` property.

Modal Window Style Behavior

When `WindowStyle` is set to `'modal'`, the figure window traps all keyboard and mouse actions over all MATLAB windows as long as the windows are visible. Windows belonging to applications other than MATLAB are unaffected.

Typing **Ctrl+C** when a modal figure has focus causes that figure to revert to a `'normal'` `WindowStyle` property setting. This allows the user to type at the command line.

Figures with the `WindowStyle` property set to `'modal'` and the `Visible` property set to `'off'` do not behave modally until MATLAB makes them visible. Therefore, you can hide a modal window for later reuse, instead of destroying it.

Modal figures do not display uimenu children, built-in menus, or toolbars. But, it is not an error to create uimenus in a modal figure or to change the `WindowStyle` property setting to `'modal'` on a figure with uimenu children. The uimenu objects exist and the figure retains them. If you reset the figure's `WindowStyle` property to `'normal'`, the uimenus display.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Figure creation function

function handle | cell array | character vector

Figure creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see “How to Specify Callback Property Values”.

This property specifies a callback function to execute when MATLAB creates the figure. MATLAB initializes all figure property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the figure that is being created.

Setting the `CreateFcn` property on an existing figure has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the figure object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Figure deletion function

function handle | cell array | character vector

Figure deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the figure (for example, when the end user deletes the figure). MATLAB executes the `DeleteFcn` callback before destroying the properties of the figure. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the figure that is being deleted.

Identifiers

`CurrentAxes` — Target axes in current figure

`Axes` object | `PolarAxes` object | graphics object

Target axes in the current figure, specified as an `Axes` object, a `PolarAxes` object, or a graphics object such as a `HeatmapChart`.

In all figures for which axes children exist, there is always a current axes. The current axes does not have to be the topmost axes, and setting an axes to be the current axes does not restack it above all other axes. If a figure contains no axes, the `get(gcf,'CurrentAxes')` command returns an empty array.

Query the `CurrentAxes` property to get the current axes object without forcing the creation of an axes if one does not exist.

`CurrentObject` — Most recently selected component in figure

object

Most recently selected component in the Figure, specified as an object. MATLAB sets the `CurrentObject` property to the last object the user clicked. This object is the front-most object in the view. You can use this property to determine which object a user has selected.

An object's `HitTest` property controls whether that object can become the `CurrentObject`.

Clicking an object whose `HandleVisibility` property is `off` (such as axis labels and title) causes the `CurrentObject` property to be set to empty. To avoid returning an empty value when users click a hidden object, set `HitTest` property of the hidden object to `'off'`.

Moving the cursor over objects does not update the `CurrentObject`. Users must click objects to update this property. See the CurrentPoint property for related information.

If you are looking for a quick way to access the current object, consider using the `gco` command.

`FileName` — FIG-file name

character vector

FIG-file name, specified as a character vector. GUIDE uses this property to store the name of the UI layout file that it saves.

Example: `figure('FileName','myfile.fig')` sets the FIG-file name to `myfile.fig`.

`IntegerHandle` — Ability to assign figure number

`'on'` (default) | `'off'`

Ability to assign figure number, specified as `'on'` or `'off'`.

If you set the `IntegerHandle` property to `'on'`, MATLAB finds the lowest integer value not used by an existing figure and sets the `Number` property to that value. If you delete a figure, MATLAB can reuse the number on a new figure window.

If you set the `IntegerHandle` property to `'off'`, MATLAB does not assign an integer value to the figure and sets the `Number` property to an empty array (`[]`).

`Number` — Figure number

integer | `[]`

This property is read-only.

Figure number, returned as an integer or empty array. You can refer to a figure using this value. For example, `figure(2)` makes the figure with a `Number` property value of 2 the current figure.

If the IntegerHandle property is set to `'off'`, `Number` is an empty array.

If `IntegerHandle` is `'on'`, the `Number` property value is an integer. If the `Figure` object is deleted, MATLAB reuses the number for the next figure.

`Type` — Type of Figure object

`'figure'`

This property is read-only.

Type of Figure object, returned as `'figure'`. Use this property to find all objects of a given type within a plotting hierarchy.

`Tag` — Figure identifier

`' '` (default) | character vector

Figure identifier, specified as a character vector. This value to serves as an identifier for the figure. When you need access to the figure elsewhere in your code, you can use the `findobj` function to search for the figure based on the `Tag` value.

Example: `figure('Tag','plotwindow')` creates a figure whose tag identifier is `'plotwindow'`.

`UserData` — Data to associate with the figure object

empty array (default) | array

Data to associate with the figure object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See “Share Data Among Callbacks” for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Figure parent

root object

Figure parent, returned as a root object.

`Children` — Children of figure

empty `GraphicsPlaceholder` array (default) | 1-D array of objects

Children of the figure, returned as an empty `GraphicsPlaceholder` or a 1-D array of objects.

You cannot add or remove children using the `Children` property of the figure. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the front-to-back order (stacking order) of the components on the screen.

To add a child to this list, set the `Parent` property of the child component to be the figure object.

Objects with the `HandleVisibility` property set to `'off'` do not list in the `Children` property. For more information, see the `HandleVisibility` property description.

`HandleVisibility` — Visibility of figure object

`'on'` (default) | `'callback'` | `'off'`

Visibility of figure object, specified as `'on'`, `'callback'`, or `'off'`.

This property determines whether a figure is in its parent's (the root's) list of children. `HandleVisibility` is useful for preventing command-line users from accidentally drawing into, or deleting a figure that contains only user interface components (such as a dialog box).

If an object is not in its parent's list of children, functions that find objects by searching the object hierarchy or querying properties cannot return that object. Such functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

When the `HandleVisibility` property value is restricted using the `'callback'` or `'off'` settings, the object does not appear in the parent object `Children` property, figures do not appear in the root CurrentFigure property, objects do not appear in the root CallbackObject property or in the figure CurrentObject property, and axes do not appear in their parent `CurrentAxes` property.

Set the root ShowHiddenHandles property to `'on'` to make all objects visible, regardless of their `HandleVisibility` settings (this does not affect the values of the `HandleVisibility` properties).

Pointers

`Pointer` — Pointer symbol

`'arrow'` (default) | `'ibeam'` | `'crosshair'` | `'watch'` | `'topl'` | `'custom'` | ...

Pointer symbol, specified as one of the symbol names in the following table or as `'custom'`. The appearance of the symbol is operating-system dependent.

Symbol Name	Resulting Symbol (System Dependent)
`'arrow'`	
`'ibeam'`	
`'crosshair'`	
`'watch'` (busy system)	
`'topl'` or `'botr'`	
`'topr'` or `'botl'`	
`'circle'`	
`'cross'`	
`'fleur'`	
`'left'` or `'right'`	

Symbol Name	Resulting Symbol (System Dependent)
`'top'` or `'bottom'`	
`'hand'`	

Note: The `'fullcrosshair'` option was removed in R2014b.

Custom Pointer Symbol

To create a custom pointer symbol, set the `Pointer` property to `'custom'` and use the `PointerShapeCData` property to define the symbol. See the PointerShapeCData property for more information.

`PointerShapeCData` — Custom pointer symbol

32-by-32 matrix | 16-by-16 matrix

Custom pointer symbol, specified as a 32-by-32 matrix (for a 32-by-32 pixel pointer) or as a 16-by-16 matrix (for a 16-by-16 pixel pointer). The figure uses this pointer symbol when you set the `Pointer` property to `'custom'`.

Each element in the matrix defines the brightness level for 1 pixel in the pointer. Element `(1,1)` of the matrix corresponds to the pixel in the upper left corner in the pointer. Set the matrix elements to one of these values:

- `1` — Black pixel.
- `2` — White pixel.
- `NaN` — Transparent pixel, such that underlying screen shows through.

`PointerShapeHotSpot` — Active pixel of pointer

`[1 1]` (default) | two-element vector

Active pixel of the pointer, specified as a two-element vector. The vector contains the row and column indices of a particular element in the `PointerShapeCData` matrix that corresponds to the desired active pixel. The default value of `[1 1]` corresponds to the pixel in the upper left corner of the pointer.

If you specify a value outside the range of the `PointerShapeCData` matrix, then the pointer uses the default active pixel of `[1 1]` instead.

This property applies only when the `Pointer` property is set to `'custom'`.

Printing and Saving

`PaperPosition` — Figure size and location on page when printing or saving

four-element vector of the form `[left bottom width height]`

Figure size and location on page when printing or saving, specified as a four-element vector of the form `[left bottom width height]`.

- `left` and `bottom` values — Control the distance from the lower left corner of the page to the lower left corner of the figure. These values are ignored when saving a figure to a nonpage format, such as a PNG or EPS format.
- `width` and `height` values — Control the figure size. If the width and height values are too large, then the figure might not reach the specified size. If the figure does not reach the specific size, then any UI components on the figure, such as uicontrols or a uitable, might not save or print as expected.

The PaperUnits property determines the units of measurement of the `PaperPosition` values. Consider setting the PaperUnits property to `'normalized'`. This setting enables MATLAB to automatically size the figure to occupy the same relative amount of the printed page, regardless of the page size.

Example: `figure('PaperPosition',[.25 .25 8 6])` set the figure's size and location for printing to `[.25 .25 8 6]`.

`PaperPositionMode` — Directive to use displayed figure size when printing or saving

`'auto'` (default) | `'manual'`

Directive to use displayed figure size when printing or saving, specified as either `'auto'` or `'manual'`.

- `'auto'` — Printed or saved figure size matches the displayed figure size. The `width` and `height` values of the `PaperPosition` property equal the figure size on the display. The `left` and `bottom` values center the figure. If the figure size changes on the display, the `PaperPosition` property automatically updates to the appropriate size and location values.

- `'manual'` — Printed or saved figure size might not match the displayed figure size. Use this option if you want to print or save the figure using a size that differs from the display, or if you do not want the figure centered on the printed or saved page. Set the `PaperPosition` property to the desired size and location. If the figure size changes on the display, the `PaperPosition` property does not automatically update.

To generate output that has the same size and resolution (DPI) as the displayed figure, set the `PaperPositionMode` property of the figure to `'auto'` and save the figure using `print` with the `-r0` option. The `-r0` option ensures that the output resolution is the same as the display resolution. If the resolutions are different, then the generated output size matches the displayed figure size in measured units (inches, centimeters, points), but not in pixels. For example, if the display resolution is 100 DPI, then a 4-by-5 inch figure is 400-by-500 pixels. If the output resolution is 200 DPI, then the printed or saved figure is the same size in inches, but 800-by-1000 pixels.

Note: Starting in R2016a, the default value is `'auto'`. Previously, the default value was `'manual'`.

To change the default value, use one of these techniques.

- Set a print preference. Print preferences persist across MATLAB sessions. You can set the print preference to either `'auto'` or `'manual'`, for example:

  ```
  matlab.graphics.internal.setPrintPreferences('DefaultPaperPositionMode','manual')
  ```

  To query the current print preference value, use the following command. If you set a preference, the command returns `'auto'` or `'manual'`. If you did not set a preference, the command returns `'unset'`.

  ```
  matlab.graphics.internal.getPrintPreferences
  ```

- Set the default value on the root object. This option affects only new figures in the current MATLAB session, for example:

  ```
  set(groot,'defaultFigurePaperPositionMode','manual')
  ```

`InvertHardcopy` — Figure background color when printing or saving

`'on'` (default) | `'off'`

Figure background color when saving or printing, specified as one of these values:

- `'on'` — Change the figure background and axes background colors to white.

- `'off'` — Use the same colors as the colors on the display. To change the figure background color on the display, use the `Color` property of the figure. To change the axes background color, use the Color property of the axes.

`PaperType` — Standard page sizes
`'usletter' | 'uslegal' | 'tabloid' | 'a0' | 'a1' | 'a2' | 'a3' | ...`

Standard page sizes when printing the figure or saving it to a paged format (PDF and PostScript® formats), specified as one of the values in this table. Specifying the `PaperType` property sets the `PaperSize` property to the corresponding page size.

Value	Page Size (Width x Height)
`'usletter'`	8.5-by-11 in (default in US)
`'uslegal'`	8.5-by-14 in
`'tabloid'`	11-by-17 in
`'a0'`	84.1-by-118.9 cm
`'a1'`	59.4-by-84.1 cm
`'a2'`	42-by-59.4 cm
`'a3'`	29.7-by-42 cm
`'a4'`	21-by-29.7 cm (default in Europe and Asia)
`'a5'`	14.8-by-21 cm
`'b0'`	102.9-by-145.6 cm
`'b1`	72.8-by-102.8 cm
`'b2'`	51.4-by-72.8 cm
`'b3'`	36.4-by-51.4 cm
`'b4'`	25.7-by-36.4 cm
`'b5'`	18.2-by-25.7 cm
`'arch-a'`	9-by-12 in
`'arch-b'`	12-by-18 in
`'arch-c'`	18-by-24 in
`'arch-d'`	24-by-36 in
`'arch-e'`	36-by-48 in

Value	Page Size (Width x Height)
`'a'`	8.5-by-11 in
`'b'`	11-by-17 in
`'c'`	17-by-22 in
`'d'`	22-by-34 in
`'e'`	34-by-43 in
`'custom'`	Custom page size. Specifying a non-standard page size using the `PaperSize` property sets `PaperPosition` to this value.

`PaperSize` — Custom page size

two-element vector of the form `[width height]`

Custom page size when printing the figure or saving it to a paged format (PDF and PostScript formats), specified as a two-element vector of the form `[width height]`. In the United States, the default value is `[8.5 11]`. In Europe and Asia, the default value is `[21 29.7]`.

Note: If you are saving the figure to a file, the `PaperSize` property only affects PDF and PostScript file formats. Other file formats ignore this property. Use the `PaperPosition` property to control the size of the saved figure.

The PaperUnits property determines the units of measurement for the `PaperSize` property. You cannot set the `PaperSize` property if the `PaperUnits` property is set to `'normalized'`. Attempting to do so results in an error.

Specifying the `PaperSize` property sets the `PaperType` property to the corresponding type, if one exists, or to `'custom'` otherwise.

`PaperOrientation` — Orientation of page

`'portrait'` (default) | `'landscape'`

Orientation of page when printing figure or saving it to a paged format (PDF and PostScript formats), specified as one of these values:

- `'portrait'` — Orient the longest page dimension vertically.
- `'landscape'` — Orient the longest page dimension horizontally.

See the `orient` function for more information.

`PaperUnits` — Units used for `PaperSize` and `PaperPosition`
`'inches'` | `'centimeters'` | `'normalized'` | `'points'`

Units used for `PaperSize` and `PaperPosition`, specified as one of these values:

- `'inches'` — Value in inches. This is the default when the locale is the United States.
- `'normalized'` — Normalized units. The lower left corner of the page maps to `(0,0)` and the upper right corner maps to `(1,1)`.
- `'centimeters'` — Value in centimeters. This is the default when the locale is Europe or Asia.
- `'points'` — Value in points. One point equals 1/72 of an inch.

Note: If you change the value of the `PaperUnits` property, it is good practice to return the property to its original value after completing your computation so as not to affect other functions that assume the `PaperUnits` property has not changed.

See Also

See Also
`figure` | `gcf`

Topics
"Access Property Values"
"Default Property Values"

figurepalette

Show or hide **Figure Palette**

Syntax

```
figurepalette('show')
figurepalette('hide')
figurepalette
figurepalette(figure_handle,...)
```

Description

`figurepalette('show')` displays the palette on the current figure.

`figurepalette('hide')` hides the palette on the current figure.

`figurepalette` toggles the visibility of the palette on the current figure. You can also use `figurepalette('toggle')` instead for the same functionality.

`figurepalette(figure_handle,...)` shows or hides the palette on the figure specified by `figure_handle`.

Examples

Open Figure Palette

Plot a line and open the figure palette.

```
plot(1:10)
figurepalette('show')
```

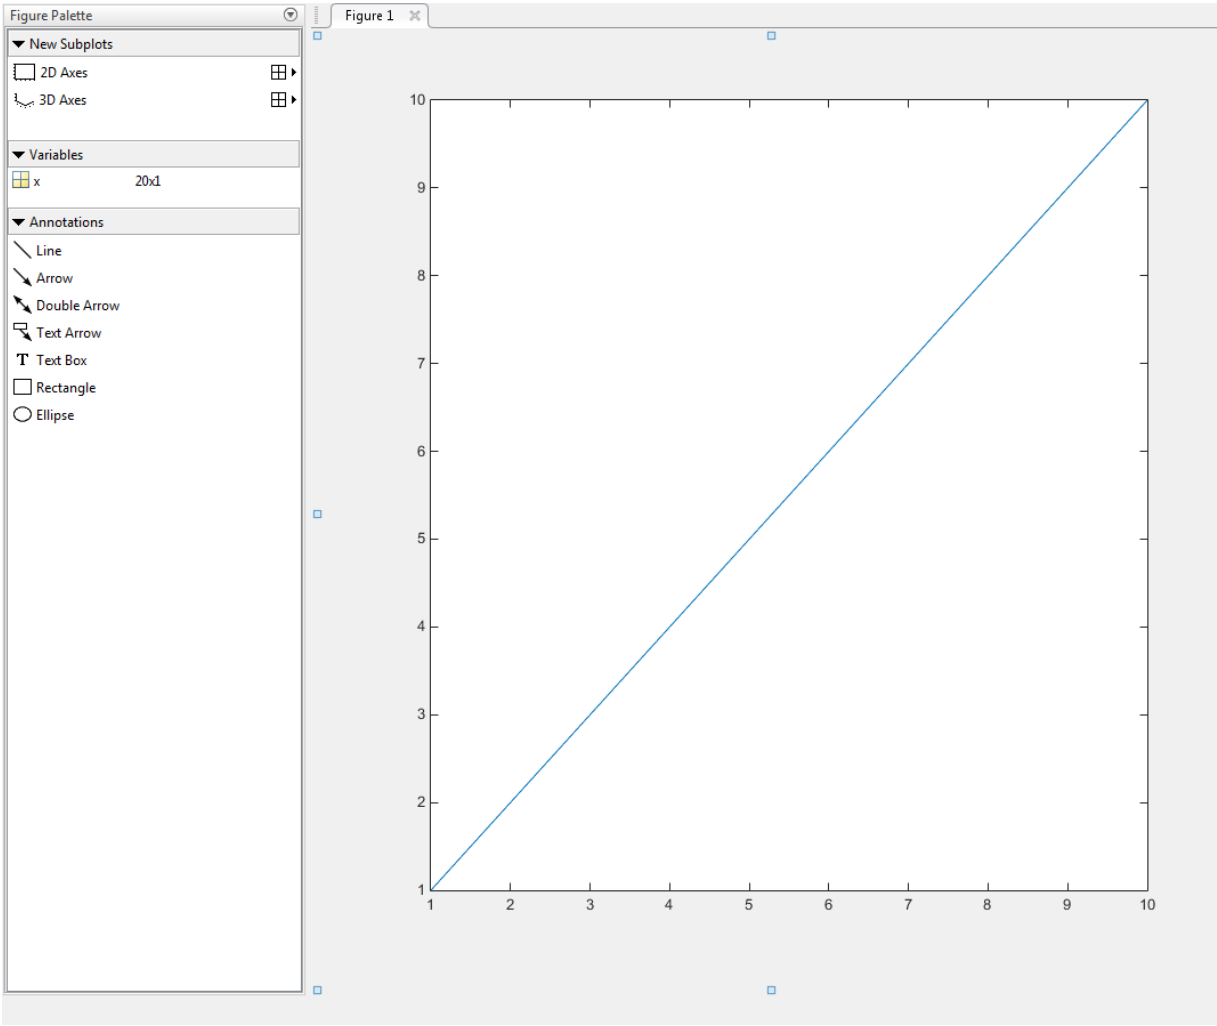

Tips

If you call `figurepalette` in a MATLAB program and subsequent lines depend on the Figure Palette being fully initialized, follow it by `drawnow` to ensure complete initialization.

Alternatives

To collectively enable the plot tools, use the larger icon on the figure toolbar. To collectively disable the plot tools, use the smaller icon . Open or close the **Figure Palette** tool from the figure's **View** menu.

See Also

`plottools` | `plotbrowser` | `propertyeditor`

Introduced before R2006a

fileattrib

Set or get attributes of file or folder

Syntax

```
fileattrib
fileattrib filename
```

```
fileattrib filename attribs
fileattrib filename attribs users
fileattrib filename attribs users s
```

```
[status,values] = fileattrib(filename)
[status,msg,msgID] = fileattrib(filename,attribs, ___ )
```

Description

`fileattrib` lists the attribute values for the current folder. The values are listed using this structure:

```
Name
archive
system
hidden
directory
UserRead
UserWrite
UserExecute
GroupRead
GroupWrite
GroupExecute
OtherRead
OtherWrite
OtherExecute
```

The first field, `Name`, displays the file or folder name. The remaining fields display a value of `0` if the attribute is off, `1` if the attribute is on, and `NaN` if the attribute does not apply.

`fileattrib` is similar to the DOS `attrib` command, or the UNIX `chmod` command.

Note: In Windows, setting the write access attribute (`'w'`) to read-only does not necessarily prevent write access. Therefore, the value for `UserWrite` may differ from what is expected.

`fileattrib filename` lists the attribute values for the named file or folder.

`fileattrib filename attribs` sets the specified attributes for the named file or folder.

`fileattrib filename attribs users` sets the file or folder attributes for the specified subset of users.

`fileattrib filename attribs users s` sets the specified attributes for the specified users for the contents of the named folder.

`[status,values] = fileattrib(filename)` returns the status and the last *successfully* set attribute values for the named file or folder. If the file exists, `status` is `1`. Otherwise, `status` is `0`.

`[status,msg,msgID] = fileattrib(filename,attribs, ___ )` sets the specified file attributes and returns the status of the operation as well as an error message and error message identifier if the set operation is unsuccessful.

Examples

View Current Folder Attributes on Windows

View attributes of the current folder on a Windows system, assuming the current folder is `C:\my_MATLAB_files`. The attributes indicate that you have read, write, and execute permissions for the current folder.

```
fileattrib
```

```
            Name: 'C:\my_MATLAB_files'
         archive: 0
          system: 0
```

```
          hidden: 0
       directory: 1
        UserRead: 1
       UserWrite: 1
     UserExecute: 1
       GroupRead: NaN
      GroupWrite: NaN
    GroupExecute: NaN
       OtherRead: NaN
      OtherWrite: NaN
    OtherExecute: NaN
```

View File Attributes on Windows

View attributes of the file `myfile.m` on a Windows system. The attributes indicate that the specified item is a file. You can read and execute the file, but cannot update it. The file is archived.

```
fileattrib myfile.m
```

```
            Name: 'C:\my_MATLAB_files\myfile.m'
         archive: 1
          system: 0
          hidden: 0
       directory: 0
        UserRead: 1
       UserWrite: 0
     UserExecute: 1
       GroupRead: NaN
      GroupWrite: NaN
    GroupExecute: NaN
       OtherRead: NaN
      OtherWrite: NaN
    OtherExecute: NaN
```

View Folder Attributes on Windows

View attributes for the folder `C:\my_MATLAB_files\doc`. The attributes indicate that you have read, write, and execute permissions for the folder.

```
fileattrib C:\my_MATLAB_files\doc
```

```
ans =
```

```
            Name: 'C:\my_MATLAB_files\doc'
         archive: 0
          system: 0
          hidden: 0
       directory: 1
        UserRead: 1
       UserWrite: 1
     UserExecute: 1
       GroupRead: NaN
      GroupWrite: NaN
    GroupExecute: NaN
       OtherRead: NaN
      OtherWrite: NaN
    OtherExecute: NaN
```

View Folder Attributes on UNIX

View attributes for the folder `/public` on a UNIX system. The attributes indicate that you have read, write, and execute permissions for the folder. In addition, users in your UNIX group and all others have read and execute permissions for the folder, but not write permissions.

```
fileattrib /public
```

```
ans =

            Name: '/public'
         archive: NaN
          system: NaN
          hidden: NaN
       directory: 1
        UserRead: 1
       UserWrite: 1
     UserExecute: 1
       GroupRead: 1
      GroupWrite: 0
    GroupExecute: 1
       OtherRead: 1
      OtherWrite: 0
    OtherExecute: 1
```

Set File Attributes on Windows

Make `myfile.m` writable.

```
fileattrib('myfile.m','+w')
```

Set File Attributes for All Users on UNIX

Make the folder `/home/work/results` a read-only folder for *all users* on UNIX platforms. The minus (`-`) preceding the write attribute, `w`, removes the write access, making the file read-only.

```
fileattrib('/home/work/results','-w','a')
```

Set Attributes for Folder and Its Contents on Windows

Make the folder `D:\work\results` and all its contents read-only and hidden. Because a value for the `users` argument is not applicable on Windows systems, `users` is specified as an empty character vector, `''`. The `'s'` argument applies the hidden and write access attributes to the contents of the folder and to the folder itself.

```
fileattrib('D:\work\results','+h -w','','s')
```

Get Attributes Structure for a Folder on Windows

Get the attributes for the folder `results` and return them as a structure. A `status` value of 1 indicates that the operation is successful. The structure `values` contains the attributes of the folder.

```
[status,values] = fileattrib('results')

status =
     1

values =
            Name: 'D:\work\results'
         archive: 0
          system: 0
          hidden: 0
       directory: 1
        UserRead: 1
       UserWrite: 1
     UserExecute: 1
       GroupRead: NaN
      GroupWrite: NaN
    GroupExecute: NaN
       OtherRead: NaN
      OtherWrite: NaN
    OtherExecute: NaN
```

Access the name attribute value in the structure. MATLAB returns the path for `results`.

```
values.Name
```

```
ans =
D:\work\results
```

Get Attributes Structure for Multiple Files on Windows

Get the attributes for all files in the current folder with names that begin with `new`. The returned `1x3` structure array `values` indicates that there are three matching files.

```
[status,values] = fileattrib('new*')
```

```
status =
     1

values =
1x3 struct array with fields:
    Name
    archive
    system
    hidden
    directory
    UserRead
    UserWrite
    UserExecute
    GroupRead
    GroupWrite
    GroupExecute
    OtherRead
    OtherWrite
    OtherExecute
```

View the file names.

```
values.Name
```

```
ans =
D:\work\results\newname.m

ans =
D:\work\results\newone.m
```

```
ans =
D:\work\results\newtest.m
```

View just the second file name.

```
values(2).Name
```

```
ans =
D:\work\results\newname.m
```

Successfully Set Attributes for a File and Get Messages on Windows

Show output that results when an attempt to set file attributes is successful. The `status` value of `1` indicates that the set operation was successful. Therefore, no error `msg` or `msgID` is returned.

```
[status,msg,msgID] = fileattrib('C:\my_MATLAB_files\doc',...
'+h -w','','s')
```

```
status =

     1

msg =

     ''


msgID =

     ''
```

Unsuccessfully Set Attributes for a File and Get Messages on Windows

Show output that results when an attempt to set file attributes is unsuccessful. The `status` value of `0` indicates that the set operation was unsuccessful. The minus sign incorrectly appears after `w`, instead of before it. `msg` describes the error that occurred and `msgID` contains the message identifier for the error that occurred.

```
[status,msg,msgID] = fileattrib('C:\my_MATLAB_files\doc',...
'+h w-','','s')
```

```
status =

     0
```

```
msg =

Illegal file mode characters on the current platform.


msgID =

MATLAB:FILEATTRIB:ModeSyntaxError
```

Input Arguments

`filename` — File or folder name

character vector

File or folder name, specified as a character vector. You can specify an absolute or relative path. `filename` can include wildcards (*).

Example: `fileattrib('myfile.m')`

`attribs` — File or folder attribute values

character vector

File or folder attribute values, specified as a character vector consisting of one or more of these values separated by spaces:

Value	Description
`'a'`	Archive (Microsoft Windows platform only).
`'h'`	Hidden file (Windows platform only).
`'s'`	System file (Windows platform only).
`'w'`	Write access (Windows and UNIX platforms). Results differ by platform and application. For example, even though `fileattrib` disables the “write” privilege for a folder, making it read-only, files in the folder could be writable for some platforms or applications.
`'x'`	Executable (UNIX platform only).

Use the plus (+) qualifier before an attribute to set it, and the minus (-) qualifier before an attribute to clear it.

Example: `fileattrib('myfile.m', '+w -h')`

`users` — Subset of users

`'a' | 'g' | 'o' | 'u' | ''`

Subset of users (on UNIX platforms only), specified as one of these values:

Value for UNIX Systems	Description
`'a'`	All users
`'g'`	Group of users
`'o'`	All other users
`'u'`	Current user

Specify an empty value `''` for all platforms other than UNIX. This value is not returned by `fileattrib` get operations.

Example: `fileattrib('/home/work/results','-w','a')`

Output Arguments

`status` — Indication of whether attempt to set or get attributes was successful

`0 | 1`

Indication of whether attempt to set or get attributes was successful, specified as `0` or `1`. If the attempt to set or get attributes was successful, `status` is `1`. Otherwise, `status` is `0`.

`values` — Attribute structure

structure array

Attribute structure, specified as a structure array containing these fields and possible values:

Field name	Possible Values
`Name`	Character vector containing name of file or folder
`archive`	`0` (not set), `1` (set), or `NaN` (not applicable)
`system`	`0` (not set), `1` (set), or `NaN` (not applicable)

Field name	Possible Values
`hidden`	`0` (not set), `1` (set), or `NaN` (not applicable)
`directory`	`0` (not set), `1` (set), or `NaN` (not applicable)
`UserRead`	`0` (not set), `1` (set), or `NaN` (not applicable)
`UserWrite`	`0` (not set), `1` (set), or `NaN` (not applicable)
`UserExecute`	`0` (not set), `1` (set), or `NaN` (not applicable)
`GroupRead`	`0` (not set), `1` (set), or `NaN` (not applicable)
`GroupWrite`	`0` (not set), `1` (set), or `NaN` (not applicable)
`GroupExecute`	`0` (not set), `1` (set), or `NaN` (not applicable)
`OtherRead`	`0` (not set), `1` (set), or `NaN` (not applicable)
`OtherWrite`	`0` (not set), `1` (set), or `NaN` (not applicable)
`OtherExecute`	`0` (not set), `1` (set), or `NaN` (not applicable)

Note: On Windows systems, setting the write access attribute (`'w'`) to read-only does not necessarily prevent write access. Therefore, the value for `UserWrite` may differ from what is expected.

`msg` — Error message

character vector

Error message, specified as a character vector. If `status` is `0`, `msg` contains the message text of the error. If `status` is `1`, `msg` is empty, `''`.

`msgID` — Error message identifier

character vector

Error message identifier, specified as a character vector. If `status` is `0`, `msgID` contains the message id of the error. If `status` is `1`, `msgID` is empty, `''`.

See Also

See Also

`cd` | `copyfile` | `delete` | `dir` | `ls` | `mkdir` | `movefile` | `rmdir`

Introduced before R2006a

filebrowser

Open Current Folder browser, or select it if already open

Syntax

```
filebrowser
```

Description

`filebrowser` opens the Current Folder browser, or if it is already open, makes it the selected tool.

See Also

`cd` | `copyfile` | `ls` | `mkdir` | `fileattrib` | `movefile` | `pwd` | `rmdir` | `commandhistory` | `workspace` | `commandwindow`

Topics

"Manage Files and Folders"

Introduced before R2006a

fileDatastore

Create FileDatastore object for collections of custom files

Syntax

```
fds = fileDatastore(location,'ReadFcn',@fcn)
fds = fileDatastore(location,Name,Value)
```

Description

`fds = fileDatastore(location,'ReadFcn',@fcn)` creates a datastore from the collection of files specified by `location` and uses the function `fcn` to read the data from the files. A datastore is a repository for collections of data that are too large to fit in memory. After creating a `FileDatstore` object, you can read and process the data in various ways. See FileDatastore for more information.

`fds = fileDatastore(location,Name,Value)` specifies additional parameters for `fds` using one or more name-value pair arguments. For example, you can specify which files to include in the datastore depending on their extensions with `fileDatastore(location,'ReadFcn',@customreader,'FileExtentions',{'.exts','.extx'})`.

Examples

Read Datastore of MAT-Files

Create a datastore containing all `.mat` files within the MATLAB® `demos` folder, specifying the `load` function to read the file data.

```
fds = fileDatastore(fullfile(matlabroot,'toolbox','matlab','demos'),'ReadFcn',@load,'F
```

```
fds =

  FileDatastore with properties:
```

```
      Files: {
             ' ...\matlab\toolbox\matlab\demos\accidents.mat';
             ' ...\matlab\toolbox\matlab\demos\airfoil.mat';
             ' ...\matlab\toolbox\matlab\demos\airlineResults.mat'
              ... and 35 more
             }
    ReadFcn: @load
```

Read the first file in the datastore, and then read the second file.

```
data1 = read(fds);
data2 = read(fds);
```

Read all files in the datastore simultaneously.

```
readall(fds);
```

Initialize a cell array to hold the data and counter `i`.

```
dataarray = cell(numel(fds.Files), 1);
i = 1;
```

Reset the datastore to the first file and read the files one at a time until there is no data left. Assign the data to the array `dataarray`.

```
reset(fds);
while hasdata(fds)
    dataarray{i} = read(fds);
    i = i+1;
end
```

Input Arguments

`location` — Files or folders to include in the datastore

character vector | cell array of character vectors

Files or folders to include in the datastore, specified as a character vector or cell array of character vectors. If the files are not in the current folder, then `location` must be full or relative paths. Files within subfolders of the specified folder are not automatically included in the datastore.

You can use the wildcard character (*) when specifying `location`. This character indicates that all matching files or all files in the matching folders are included in the datastore.

If the files are not available locally, then the full path of the files or folders must be an internationalized resource identifier (IRI) of the form `hdfs://hostname:portnumber/path_to_file`.

For information on using `datastore` with Amazon S3 and HDFS, see "Read Remote Data".

Note: When reading from HDFS or when reading Sequence files locally, the `datastore` function calls the `javaaddpath` command. This command does the following:

- Clears the definitions of all Java classes defined by files on the dynamic class path
- Removes all global variables and variables from the base workspace
- Removes all compiled scripts, functions, and MEX-functions from memory

To prevent persistent variables, code files, or MEX-files from being cleared, use the `mlock` function.

Example: `'file1.ext'`

Example: `'../dir/data/file1.ext'`

Example: `{'C:\dir\data\file1.exts','C:\dir\data\file2.extx'}`

Example: `'C:\dir\data\*.ext'`

Data Types: `char` | `cell`

`@fcn` — Function that reads file data

function handle

Function that reads the file data, specified as a function handle. At a minimum, the function takes a file name as input, and then it outputs the corresponding file data. For example, if `customreader` is the specified function to read the file, then it must have a signature similar to the following:

```
function data = customreader(filename)
..
```

```
end
```

If there is more than one output argument, then the datastore uses only the first argument and ignores the rest.

Example: `@customreader`

Data Types: `function_handle`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `fds = fileDatastore('C:\dir\data','FileExtensions',{'.exts','.extx'})`

`'IncludeSubfolders'` — Subfolder inclusion flag

`true` or `false` | 0 or 1

Subfolder inclusion flag, specified as the comma-separated pair consisting of `'IncludeSubfolders'` and `true`, `false`, 0, or 1. Specify `true` to include all files and subfolders within each folder or `false` to include only the files within each folder.

If you do not specify `'IncludeSubfolders'`, then the default value is `false`.

Example: `'IncludeSubfolders',true`

Data Types: `logical` | `double`

`'FileExtensions'` — Custom format file extensions

character vector | cell array of character vectors

Custom format file extensions, specified as the comma-separated pair consisting of `'FileExtensions'` and a character vector or cell array of character vectors. You can use `''` to represent files without extensions. If you do not specify `'FileExtensions'`, then `fileDatastore` automatically includes all files within a folder.

Example: `'FileExtensions','.ext'`

Example: `'FileExtensions',{'.exts','.extx'}`

Data Types: `char` | `cell`

Output Arguments

`fds` — Custom file datastore
`FileDatastore` object

Datastore for custom file collections, returned as a `FileDatastore` object. The `Files` property is a cell array of character vectors, where each character vector is an absolute path to a file resolved from the `location` argument. See FileDatastore for more information.

See Also

See Also
`datastore` | `mapreduce` | `tall`

Topics
"Getting Started with Datastore"
"Read Remote Data"

Introduced in R2016a

filemarker

Character to separate file name and internal function name

Syntax

```
M = filemarker
```

Description

`M = filemarker` returns the character that separates a file and a within-file function name.

Examples

On the Microsoft Windows platform, for example, `filemarker` returns the '>' character:

```
filemarker

ans =
   >
```

You can use the following command on any platform to get the help text for the local function `validateSizes` defined in `imwrite.m`:

```
 helptext = help(['imwrite' filemarker 'validateSizes'])

helptext =
  How many bytes does each element occupy in memory?
```

You can use the `filemarker` character to indicate a location within a MATLAB program file where you want to set a breakpoint, for example. On all platforms, if you need to distinguish between two nested functions with the same name, use the forward slash (/) character to indicate the path to a particular instance of a function.

For instance, suppose `myfunction.m` contains this code:

```
function x = myfunction
```

```
...
    function y = mynested1
    ...
 end

 function z = mynested2
    ...
    end
end

function m = myfunction2
...
    function n = mynested1
    ...
    end
end
```

To indicate that you want to set a breakpoint at function `mynested1` nested within function `myfunction`, use the following command on the Windows platform:

```
dbstop myfunction>myfunction/mynested1
```

To indicate that you want to set a breakpoint at function `mynested2` nested within function `myfunction` use the following command on the Windows platform:

```
dbstop myfunction>mynested2
```

In the first case, you specify `myfunction/mynested1` because `myfunction.m` contains two nested functions named `mynested1`. In the second case, there is no need to specify `myfunction/mynested2` because there is only one function `mynested2` within `myfunction.m`.

See Also

`filesep`

Introduced in R2006a

fileparts

Parts of file name and path

Syntax

```
[pathstr,name,ext] = fileparts(filename)
```

Description

`[pathstr,name,ext] = fileparts(filename)` returns the path name, file name, and extension for the specified file. The file does not have to exist. `filename` is a character vector. The returned `ext` field contains a dot (`.`) before the file extension.

Input Arguments

filename

Name of a file or folder, specified as a character vector. `filename` can include a path and file extension. The function interprets all characters following the right-most delimiter as a file name plus extension.

Output Arguments

pathstr

Part of `filename` interpreted as a path name, specified as a character vector.

name

Name of the file without any extension, specified as a character vector

ext

File extension, specified as a character vector. `ext` begins with a period (`.`)

Examples

Return the different parts of a file specification to `pathstr`, `name`, and `ext`. The full file specification is:

```
file = 'H:\user4\matlab\myfile.txt';
[pathstr,name,ext] = fileparts(file)

pathstr =
H:\user4\matlab

name =
myfile

ext =
.txt
```

Query parts of a user `.cshrc` file:

```
[pathstr,name,ext] = fileparts('/home/jsmith/.cshrc')

pathstr =
/home/jsmith

name =
   Empty matrix: 1-by-0

ext =
.cshrc
```

`fileparts` interprets the entire file name as an extension because it begins with a period.

Tutorials

- "Specify File Names"

Definitions

Path Name

The full or partial path to a destination folder location, always the initial portion of `filename`. Path names end with a slash character and, where appropriate, can begin

with a drive letter. Windows paths use backward slashes (\). UNIX and Macintosh paths use forward slashes (/).

Tips

- `fileparts` only parses file names. It does not verify that a file or a folder exists.
- You can reconstruct the file from the parts using:

  ```
  fullfile(pathstr,[name ext])
  ```

- On Microsoft Windows systems, you can use either forward (/) or back (\) slashes as path delimiters, even within the same file name. On UNIX and Macintosh systems, use only / as a delimiter. You can use the `filesep` function to insert the correct separator character for the platform on which your code executes:

  ```
  sep = filesep;
  file = ['H:' sep 'user4' sep 'matlab' sep 'myfile.txt'];

  file =
  H:\user4\matlab\myfile.txt
  ```

- If the input consists of a folder name only, be sure that the right-most character is a delimiter (/ or \). Otherwise, `fileparts` parses the trailing portion of `filename` as the name of a file and returns it in `name` instead of in `pathstr`.

Alternatives

Use `uigetfile` to interactively select and return a file name and path, or `uigetdir` to interactively select and return a path name. If you call `fileparts` with the output of `uigetfile`, you can parse out the file name and extension.

See Also

`filesep` | `fullfile` | `pathsep` | `uigetdir` | `uigetfile`

Topics

"Specify File Names"

Introduced before R2006a

fileread

Read contents of file as text

Syntax

text = fileread(*filename*)

Description

text = fileread(*filename*) returns a character vector that contains the contents of the file specified by *filename*. Specify filename as a character vector or string.

Examples

Read and search the file Contents.m in the MATLAB iofun directory for the reference to fileread:

```
% find the correct directory and file
io_contents = ...
  fullfile(matlabroot,'toolbox','matlab','iofun','Contents.m');

% read the file
filetext = fileread(io_contents);

% search for the line of code that includes 'fileread'
% each line is separated by a newline ('\n')

expr = '[^\n]*fileread[^\n]*';
fileread_info = regexp(filetext,expr,'match');
```

See Also

fgetl | fgets | fscanf | fread | importdata | type | textscan

filesep

File separator for current platform

Syntax

```
f = filesep
```

Description

`f = filesep` returns the platform-specific file separator character. The file separator is the character that separates individual folder and file names in a path.

Examples

Create a path to the `iofun` folder on a Microsoft Windows platform:

```
iofun_dir = ['toolbox' filesep 'matlab' filesep 'iofun']

iofun_dir =
   toolbox\matlab\iofun
```

Create a path to `iofun` on a UNIX[1] platform.

```
iodir = ['toolbox' filesep 'matlab' filesep 'iofun']

iodir =
   toolbox/matlab/iofun
```

See Also

`fullfile` | `fileparts` | `pathsep`

Introduced before R2006a

1. UNIX is a registered trademark of The Open Group in the United States and other countries.

fill

Filled 2-D polygons

Syntax

```
fill(X,Y,C)
fill(X,Y,ColorSpec)
fill(X1,Y1,C1,X2,Y2,C2,...)
fill(...,'PropertyName',PropertyValue)
fill(ax,...)
h = fill(...)
```

Description

The `fill` function creates colored polygons.

`fill(X,Y,C)` creates filled polygons from the data in `X` and `Y` with vertex color specified by `C`. `C` is a vector or matrix used as an index into the colormap. If `C` is a row vector, `length(C)` must equal `size(X,2)` and `size(Y,2)`; if `C` is a column vector, `length(C)` must equal `size(X,1)` and `size(Y,1)`. If necessary, `fill` closes the polygon by connecting the last vertex to the first. The values in `X` and `Y` can be numeric, datetime, duration, or categorical values.

`fill(X,Y,ColorSpec)` fills two-dimensional polygons specified by `X` and `Y` with the color specified by `ColorSpec`.

`fill(X1,Y1,C1,X2,Y2,C2,...)` specifies multiple two-dimensional filled areas.

`fill(...,'PropertyName',PropertyValue)` allows you to specify property names and values for a patch graphics object.

`fill(ax,...)` creates the polygons in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = fill(...)` returns a vector of patch objects.

Examples

Create Red Octagon

Define the data.

```
t = (1/16:1/8:1)'*2*pi;
x = cos(t);
y = sin(t);
```

Create a red octagon using the `fill` function.

```
fill(x,y,'r')
axis square
```

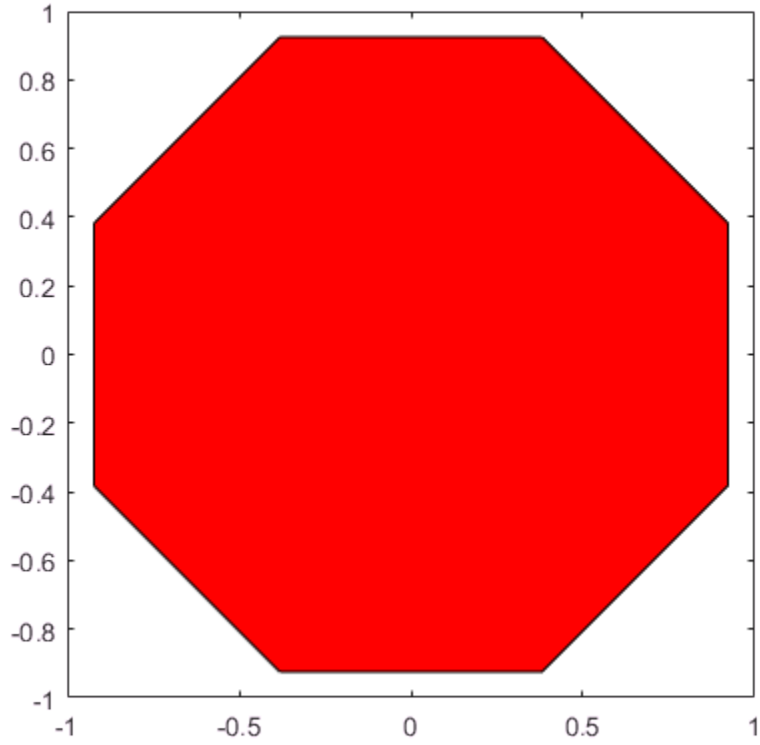

- "Plot Dates and Durations"
- "Plot Categorical Data"

Tips

If `X` or `Y` is a matrix, and the other is a column vector with the same number of elements as rows in the matrix, `fill` replicates the column vector argument to produce a matrix of the required size. `fill` forms a vertex from corresponding elements in `X` and `Y` and creates one polygon from the data in each column.

If `X` or `Y` contains one or more `NaN` values, then `fill` does not fill the polygons.

The type of color shading depends on how you specify color in the argument list. If you specify color using `ColorSpec`, `fill` generates flat-shaded polygons by setting the patch object's `FaceColor` property to the corresponding RGB triplet.

If you specify color using `C`, `fill` scales the elements of `C` by the values specified by the axes property `CLim`. After scaling `C`, `C` indexes the current colormap.

If `C` is a row vector, `fill` generates flat-shaded polygons where each element determines the color of the polygon defined by the respective column of the `X` and `Y` matrices. Each patch object's `FaceColor` property is set to `'flat'`. Each row element becomes the `CData` property value for the `n`th patch object, where *n* is the corresponding column in `X` or `Y`.

If `C` is a column vector or a matrix, `fill` uses a linear interpolation of the vertex colors to generate polygons with interpolated colors. It sets the patch graphics object `FaceColor` property to `'interp'` and the elements in one column become the `CData` property value for the respective patch object. If `C` is a column vector, `fill` replicates the column vector to produce the required sized matrix.

See Also

See Also

Functions

`axis` | `caxis` | `colormap` | `ColorSpec` | `fill3` | `patch`

Properties

Patch Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

fill3

Filled 3-D polygons

Syntax

```
fill3(X,Y,Z,C)
fill3(X,Y,Z,ColorSpec)
fill3(X1,Y1,Z1,C1,X2,Y2,Z2,C2,...)
fill3(...,'PropertyName',PropertyValue)
fill3(ax,...)
h = fill3(...)
```

Description

The `fill3` function creates flat-shaded and Gouraud-shaded polygons.

`fill3(X,Y,Z,C)` fills three-dimensional polygons. `X`, `Y`, and `Z` triplets specify the polygon vertices. If `X`, `Y`, or `Z` is a matrix, `fill3` creates *n* polygons, where *n* is the number of columns in the matrix. `fill3` closes the polygons by connecting the last vertex to the first when necessary. The values in `X`, `Y`, and `Z` can be numeric, datetime, duration, or categorical values.

`C` specifies color, where `C` is a vector or matrix of indices into the current colormap. If `C` is a row vector, `length(C)` must equal `size(X,2)` and `size(Y,2)`; if `C` is a column vector, `length(C)` must equal `size(X,1)` and `size(Y,1)`.

`fill3(X,Y,Z,ColorSpec)` fills three-dimensional polygons defined by `X`, `Y`, and `Z` with color specified by `ColorSpec`.

`fill3(X1,Y1,Z1,C1,X2,Y2,Z2,C2,...)` specifies multiple filled three-dimensional areas.

`fill3(...,'PropertyName',PropertyValue)` allows you to set values for specific patch properties.

`fill3(ax,...)` creates the polygons in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = fill3(...)` returns a vector of patch objects.

Examples

Create Filled 3-D Polygon

Create four triangles with interpolated colors.

```
X = [0 1 1 2; 1 1 2 2; 0 0 1 1];
Y = [1 1 1 1; 1 0 1 0; 0 0 0 0];
Z = [1 1 1 1; 1 0 1 0; 0 0 0 0];
C = [0.5000 1.0000 1.0000 0.5000;
     1.0000 0.5000 0.5000 0.1667;
     0.3330 0.3330 0.5000 0.5000];

figure
fill3(X,Y,Z,C)
```

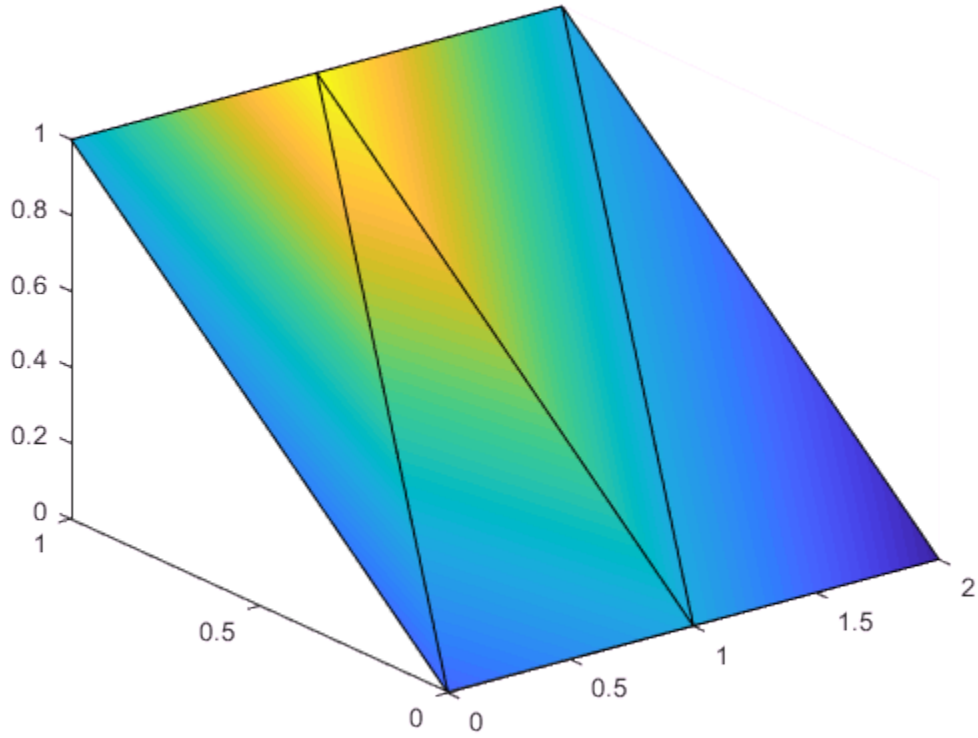

- "Plot Dates and Durations"
- "Plot Categorical Data"

Algorithms

If `X`, `Y`, and `Z` are matrices of the same size, `fill3` forms a vertex from the corresponding elements of `X`, `Y`, and `Z` (all from the same matrix location), and creates one polygon from the data in each column.

If `X`, `Y`, or `Z` is a matrix, `fill3` replicates any column vector argument to produce matrices of the required size.

If you specify color using `ColorSpec`, `fill3` generates flat-shaded polygons and sets the patch object `FaceColor` property to an RGB triplet.

If you specify color using `C`, `fill3` scales the elements of CLim by the axes property `CLim`, which specifies the color axis scaling parameters, before indexing the current colormap.

If `C` is a row vector, `fill3` generates flat-shaded polygons and sets the `FaceColor` property of the patch objects to `'flat'`. Each element becomes the `CData` property value for the respective patch object.

If `C` is a column vector or a matrix, `fill3` generates polygons with interpolated colors and sets the patch object `FaceColor` property to `'interp'`. `fill3` uses a linear interpolation of the vertex colormap indices when generating polygons with interpolated colors. The elements in one column become the `CData` property value for the respective patch object. If `C` is a column vector, `fill3` replicates the column vector to produce the required sized matrix.

See Also

See Also

Functions

`axis` | `caxis` | `colormap` | `ColorSpec` | `fill` | `patch`

Properties

Patch Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

fillmissing

Fill missing values

Syntax

```
F = fillmissing(A,'constant',v)
F = fillmissing(A,method)
F = fillmissing(A,movmethod,window)
F = fillmissing( ___ ,dim)
F = fillmissing( ___ ,Name,Value)
[F,TF] = fillmissing( ___ )
```

Description

`F = fillmissing(A,'constant',v)` fills missing entries of an array or table with the constant value `v`. If `A` is a matrix or multidimensional array, then `v` can be either a scalar or a vector. When `v` is a vector, each element specifies the fill value in the corresponding column of `A`. If `A` is a table or timetable, then `v` can also be a cell array.

Missing values are defined according to the data type of `A`:

- `NaN` — `double`, `single`, `duration`, and `calendarDuration`
- `NaT` — `datetime`
- `<missing>`—`string`
- `<undefined>` — `categorical`
- `' '` — `char`
- `{''}` — `cell` of character arrays

If `A` is a table, then the data type of each column defines the missing value for that column.

`F = fillmissing(A,method)` fills missing entries using the method specified by `method`, which can be one of the following:

- `'previous'` — previous non-missing value
- `'next'` — next non-missing value
- `'nearest'` — nearest non-missing value
- `'linear'` — linear interpolation of neighboring, non-missing values (numeric, `duration`, and `datetime` data types only)
- `'spline'` — piecewise cubic spline interpolation (numeric, `duration`, and `datetime` data types only)
- `'pchip'` — shape-preserving piecewise cubic spline interpolation (numeric, `duration`, and `datetime` data types only)

`F = fillmissing(A,movmethod,window)` fills missing entries using a moving window mean or median with window length `window`. For example, `fillmissing(A,'movmean',5)` fills data with a moving average using a window length of 5.

`F = fillmissing( ___ ,dim)` specifies the dimension of `A` to operate along. By default, `fillmissing` operates along the first dimension whose size does not equal 1. For example, if `A` is a matrix, then `fillmissing(A,2)` operates across the columns of `A`, filling missing data row by row.

`F = fillmissing( ___ ,Name,Value)` specifies additional parameters for filling missing values using one or more name-value pair arguments. For example, if `t` is a vector of time values, then `fillmissing(A,'linear','SamplePoints',t)` interpolates the data in `A` relative to the times in `t`.

`[F,TF] = fillmissing( ___ )` also returns a logical array corresponding to the entries of `A` that were filled.

Examples

Vector with `NaN` Values

Create a vector that contains `NaN` values and replace each `NaN` with the previous non-missing value.

```
A = [1 3 NaN 4 NaN NaN 5];
F = fillmissing(A,'previous')
```

```
F =

     1     3     3     4     4     4     5
```

Interpolate Missing Data

Use interpolation to replace `NaN` values in non-uniformly sampled data.

Define a vector of non-uniform sample points and evaluate the sine function over the points.

```
x = [-4*pi:0.1:0, 0.1:0.2:4*pi];
A = sin(x);
```

Inject `NaN` values into `A`.

```
A(A < 0.75 & A > 0.5) = NaN;
```

Fill the missing data using linear interpolation, and return the filled vector `F` and the logical vector `TF`. The value 1 (`true`) in entries of `TF` corresponds to the values of `F` that were filled.

```
[F,TF] = fillmissing(A,'linear','SamplePoints',x);
```

Plot the original data and filled data.

```
plot(x,A,'.', x(TF),F(TF),'o')
xlabel('x');
ylabel('sin(x)')
legend('Original Data','Filled Missing Data')
```

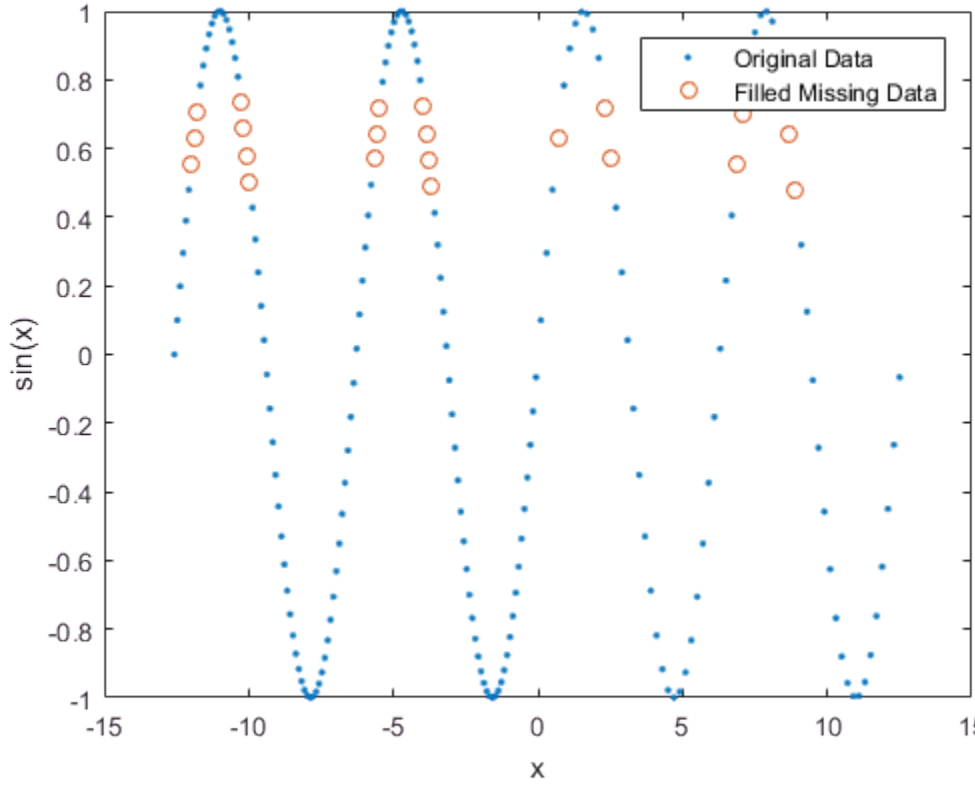

Replace NaN with Moving Median

Use a moving median to fill missing numeric data.

Create a vector of sample points x and a vector of data A that contains missing values.

```
x = linspace(0,10,200);
A = sin(x) + 0.5*(rand(size(x))-0.5);
A([1:10 randi([1 length(x)],1,50)]) = NaN;
```

Replace NaN values in A using a moving median with a window of length 10, and plot both the original data and the filled data.

```
F = fillmissing(A,'movmedian',10);
plot(x,F,'r.-',x,A,'b.-')
legend('Filled Missing Data','Original Data')
```

Matrix with Missing Endpoints

Create a matrix with missing entries and fill across the columns (second dimension) one row at a time using linear interpolation. For each row, fill leading and trailing missing values with the nearest non-missing value in that row.

```
A = [NaN NaN 5 3 NaN 5 7 NaN 9 NaN;
```

```
     8 9 NaN 1 4 5 NaN 5 NaN 5;
     NaN 4 9 8 7 2 4 1 1 NaN]
```

```
A =

   NaN   NaN     5     3   NaN     5     7   NaN     9   NaN
     8     9   NaN     1     4     5   NaN     5   NaN     5
   NaN     4     9     8     7     2     4     1     1   NaN
```

```
F = fillmissing(A,'linear',2,'EndValues','nearest')
```

```
F =

     5     5     5     3     4     5     7     8     9     9
     8     9     5     1     4     5     5     5     5     5
     4     4     9     8     7     2     4     1     1     1
```

Table with Multiple Data Types

Fill missing values for table variables with different data types.

Create a table whose variables include `categorical`, `double`, and `char` data types.

```
A = table(categorical({'Sunny';'Cloudy';''}),[66;NaN;54],{'';'N';'Y'},[37;39;NaN],...
    'VariableNames',{'Description' 'Temperature' 'Rain' 'Humidity'})
```

```
A = 3×4 table
    Description    Temperature    Rain    Humidity
    ___________    ___________    ____    ________

    Sunny           66            ''       37
    Cloudy         NaN            'N'      39
    <undefined>     54            'Y'     NaN
```

Replace all missing entries with the value from the previous entry. Since there is no previous element in the `Rain` variable, the missing character vector is not replaced.

```
F = fillmissing(A,'previous')
```

```
F = 3×4 table
```

```
    Description    Temperature    Rain    Humidity
    ___________    ___________    ____    ________

    Sunny          66             ''      37
    Cloudy         66             'N'     39
    Cloudy         54             'Y'     39
```

Replace the `NaN` values from the `Temperature` and `Humidity` variables in `A` with 0.

```
F = fillmissing(A,'constant',0,'DataVariables',{'Temperature','Humidity'})
```

```
F = 3×4 table
    Description    Temperature    Rain    Humidity
    ___________    ___________    ____    ________

    Sunny          66             ''      37
    Cloudy          0             'N'     39
    <undefined>    54             'Y'      0
```

Alternatively, use the `isnumeric` function to identify the numeric variables to operate on.

```
F = fillmissing(A,'constant',0,'DataVariables',@isnumeric)
```

```
F = 3×4 table
    Description    Temperature    Rain    Humidity
    ___________    ___________    ____    ________

    Sunny          66             ''      37
    Cloudy          0             'N'     39
    <undefined>    54             'Y'      0
```

Input Arguments

A — Input data

vector | matrix | multidimensional array

Input data, specified as a vector, matrix, or multidimensional array.

If A is a timetable, then only table values are filled. If the associated vector of row times contains a NaT or NaN value, then fillmissing produces an error. Row times must be unique and listed in ascending order.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string | cell | table | timetable | categorical | datetime | duration | calendarDuration

v — Fill constant

scalar | vector | cell array

Fill constant, specified as a scalar, vector, or cell array. v can be a vector when A is a matrix or multidimensional array. v can be a cell array when A is a table or timetable.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | cell | categorical | datetime | duration

method — Fill method

'previous' | 'next' | 'nearest' | 'linear' | 'spline' | 'pchip'

Fill method, specified as one of the following:

Method	Description
'previous'	previous non-missing value
'next'	next non-missing value
'nearest'	nearest non-missing value
'linear'	linear interpolation of neighboring, non-missing values (numeric, duration, and datetime data types only)
'spline'	piecewise cubic spline interpolation (numeric, duration, and datetime data types only)
'pchip'	shape-preserving piecewise cubic spline interpolation (numeric, duration, and datetime data types only)

movmethod — Moving method

'movmean' | 'movmedian'

Moving method to fill missing data, specified as one of the following:

Method	Description
`'movmean'`	Moving average over a window of length `window` (numeric data types only)
`'movmedian'`	Moving median over a window of length `window` (numeric data types only)

`window` — Window length

positive integer scalar | two-element vector of positive integers | positive duration scalar | two-element vector of positive durations

Window length, specified as a positive integer scalar, a two-element vector of positive integers, a positive duration scalar, or a two-element vector of positive durations.

When `window` is a positive integer scalar, then the window is centered about the current element and contains `window-1` neighboring elements. If `window` is even, then the window is centered about the current and previous elements. If `window` is a two-element vector of positive integers `[b f]`, then the window contains the current element, `b` elements backward, and `f` elements forward.

When `A` is a timetable or `'SamplePoints'` is specified as a `datetime` or `duration` vector, `window` must be of type `duration`, and the windows are computed relative to the sample points.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

When `A` is a table or timetable, `dim` is not supported. `fillmissing` operates along each table or timetable variable separately.

Consider a two-dimensional input array, `A`.

- If `dim=1`, then `fillmissing` fills `A` column by column.



fillmissing(A,method,1)

- If `dim=2`, then `fillmissing` fills `A` row by row.



fillmissing(A,method,2)

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `fillmissing(A,'DataVariables',{'Temperature','Altitude'})` fills only the columns corresponding to the `Temperature` and `Altitude` variables of an input table

`'EndValues'` — Method for handling endpoints

`'extrap'` (default) | `'previous'` | `'next'` | `'nearest'` | `'none'` | scalar

Method for handling endpoints, specified as the comma-separated pair consisting of `'EndValues'` and one of `'extrap'`, `'previous'`, `'next'`, `'nearest'`, `'none'`, or

a constant scalar value. The endpoint fill method handles leading and trailing missing values based on the following definitions:

Method	Description
`'extrap'`	same as `method`
`'previous'`	previous non-missing value
`'next'`	next non-missing value
`'nearest'`	nearest non-missing value
`'none'`	no fill value
scalar	constant value (numeric, `duration`, and `datetime` data types only)

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `datetime` | `duration`

`'SamplePoints'` — Sample points
vector

Sample points for fill method, specified as the comma-separated pair consisting of `'SamplePoints'` and a vector. The sample points represent the location of the data in `A`, and must be sorted and contain unique elements. Sample points do not need to be uniformly sampled. If `A` is a timetable, then the default sample points vector is the vector of row times. Otherwise, the default vector is `[1 2 3 ...]`.

Moving windows are defined relative to the sample points. For example, if `t` is a vector of times corresponding to the input data, then `fillmissing(rand(1,10),'movmean',3,‘SamplePoints’,t)` has a window that represents the time interval between `t(i)-1.5` and `t(i)+1.5`.

When the sample points vector has data type `datetime` or `duration`, then the moving window length must have type `duration`.

This name-value pair is not supported when the input data is a timetable.

Data Types: `double` | `single` | `datetime` | `duration`

`'DataVariables'` — Table variables to fill
variable name | cell array of variable names | numeric vector | logical vector | function handle

Table variables to fill, specified as the comma-separated pair consisting of `'DataVariables'` and a variable name, a cell array of variable names, a numeric vector, a logical vector, or a function handle. The `'DataVariables'` value indicates which columns of the input table to fill, and can be one of the following:

- A character vector specifying a single table variable name
- A cell array of character vectors where each element is a table variable name
- A vector of table variable indices
- A logical vector whose elements each correspond to a table variable, where `true` includes the corresponding variable and `false` excludes it
- A function handle that returns a logical scalar, such as `@isnumeric`

Example: `'Age'`

Example: `{'Height','Weight'}`

Example: `@iscategorical`

Data Types: `char` | `cell` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `function_handle`

Output Arguments

F — Filled data

vector | matrix | multidimensional array | table | timetable

Filled data, returned as a vector, matrix, multidimensional array, table, or timetable. `F` is the same size as `A`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `table` | `timetable` | `categorical` | `datetime` | `duration` | `calendarDuration`

TF — Filled data indicator

vector | matrix | multidimensional array

Filled data indicator, returned as a vector, matrix, or multidimensional array. `TF` is a logical array where 1 (`true`) corresponds to entries in `F` that were filled and 0 (`false`) corresponds to unchanged entries. `TF` is the same size as `A` and `F`.

Data Types: `logical`

See Also

See Also

`filloutliers` | `ismissing` | `isnan` | `missing` | `rmmissing` | `standardizeMissing`

Introduced in R2016b

filloutliers

Detect and replace outliers in data

Syntax

```
B = filloutliers(A,fillmethod)
B = filloutliers(A,fillmethod,findmethod)
B = filloutliers(A,fillmethod,movmethod,window)
B = filloutliers( ___ ,dim)
B = filloutliers( ___ ,Name,Value)
[B,TF,lower,upper,center] = filloutliers( ___ )
```

Description

`B = filloutliers(A,fillmethod)` finds outliers in `A` and replaces them according to `fillmethod`. For example, `filloutliers(A,'previous')` replaces outliers with the previous non-outlier element. By default, an outlier is a value that is more than three scaled median absolute deviations (MAD) away from the median. If `A` is a matrix or table, then `filloutliers` operates on each column separately. If `A` is a multidimensional array, then `filloutliers` operates along the first dimension whose size does not equal 1.

`B = filloutliers(A,fillmethod,findmethod)` specifies a method for determining outliers. For example, `filloutliers(A,'previous','mean')` defines an outlier as an element of `A` more than three standard deviations from the mean.

`B = filloutliers(A,fillmethod,movmethod,window)` specifies a moving method for determining local outliers according to a window length defined by `window`. For example, `filloutliers(A,'previous','movmean',5)` identifies outliers as elements more than three local standard deviations away from the local mean within a five-element window.

`B = filloutliers( ___ ,dim)` operates along dimension `dim` of `A` for any of the previous syntaxes. For example, `filloutliers(A,'linear',2)` operates on each row of a matrix `A`.

`B = filloutliers( ___ ,Name,Value)` specifies additional parameters for detecting and replacing outliers using one or more name-value pair arguments. For example, `filloutliers(A,'previous','SamplePoints',t)` detects outliers in `A` relative to the corresponding elements of a time vector `t`.

`[B,TF,lower,upper,center] = filloutliers( ___ )` also returns information about the position of the outliers and thresholds computed by the detection method. `TF` is a logical array indicating the location of the outliers in `A`. The `lower`, `upper`, and `center` arguments represent the lower and upper thresholds and the center value used by the outlier detection method.

Examples

Interpolate Outliers

Create a vector of data containing an outlier, and use linear interpolation to replace the outlier. Plot the original and filled data.

```
A = [57 59 60 100 59 58 57 58 300 61 62 60 62 58 57];
B = filloutliers(A,'linear');
plot(1:15,A,1:15,B,'o')
legend('Original Data','Interpolated Data')
```

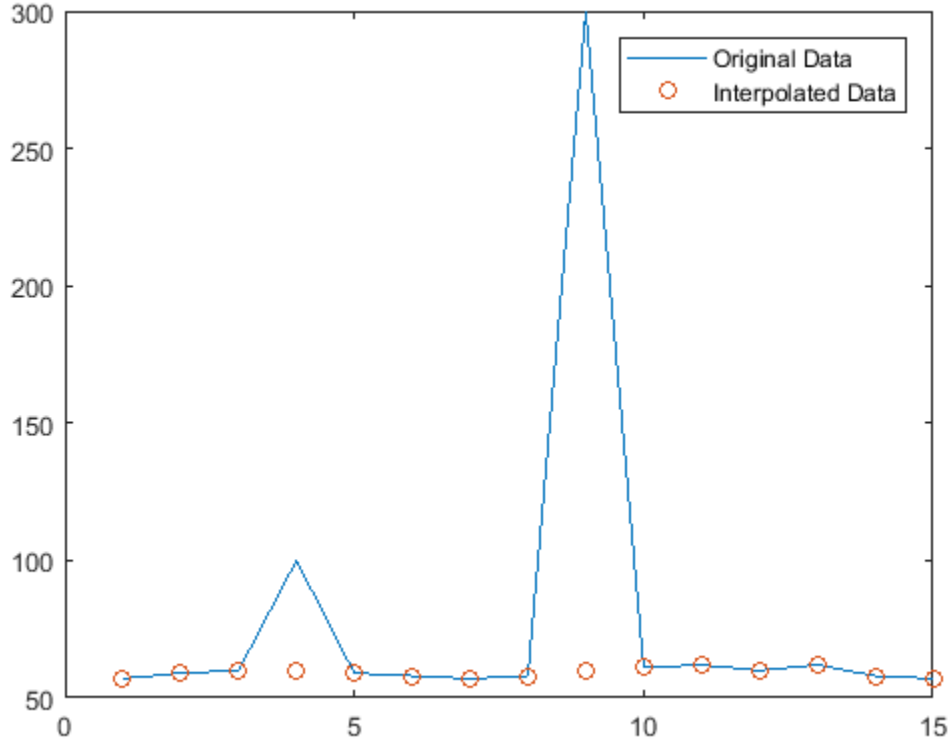

Determine Outliers with Mean

Create a vector containing an outlier, and define outliers as points outside three standard deviations from the mean. Replace the outlier with the nearest element that is not an outlier, and plot the original data and the interpolated data.

```
A = [57 59 60 100 59 58 57 58 300 61 62 60 62 58 57];
B = filloutliers(A,'nearest','mean');
plot(1:15,A,1:15,B,'o')
legend('Original Data','Interpolated Data')
```

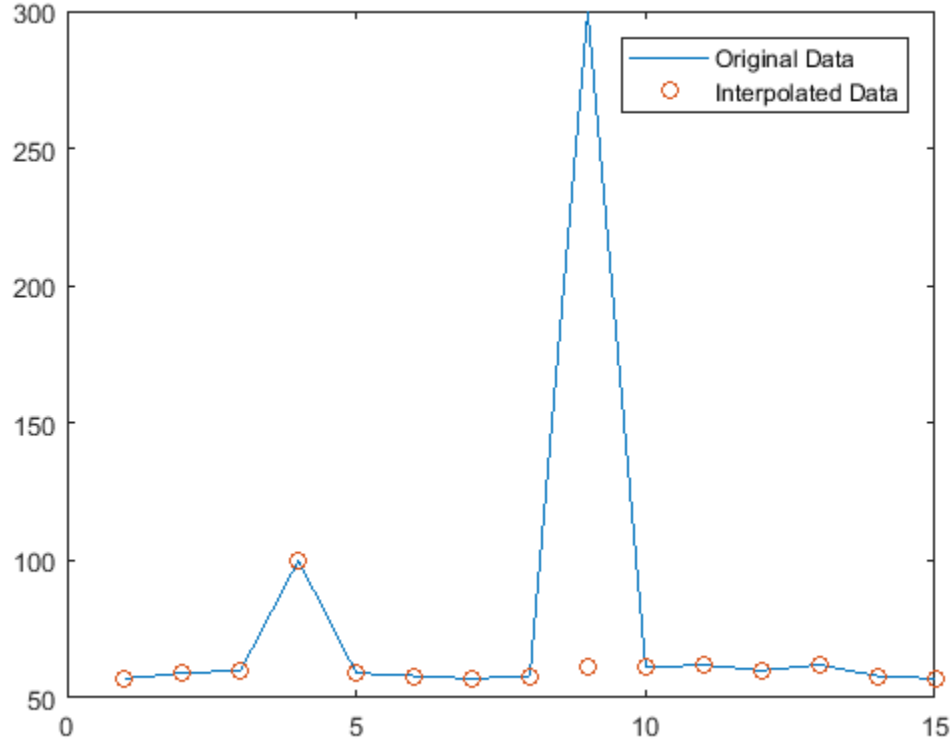

Determine Outliers with Sliding Window

Use a moving median to find local outliers within a sine wave that corresponds to a time vector.

Create a vector of data containing a local outlier.

```
x = -2*pi:0.1:2*pi;
A = sin(x);
A(47) = 0;
```

Create a time vector that corresponds to the data in A.

```
t = datetime(2017,1,1,0,0,0) + hours(0:length(x)-1);
```

Define outliers as points more than three local scaled MAD away from the local median within a sliding window. Find the location of the outlier in `A` relative to the points in `t` with a window size of 5 hours. Fill the outlier with the computed threshold value using the method `'clip'`, and plot the original and filled data.

```
[B,TF,upper,lower,center] = filloutliers(A,'clip','movmedian',hours(5),'SamplePoints',t
plot(t,A,t,B,'o')
legend('Original Data','Filled Data')
```

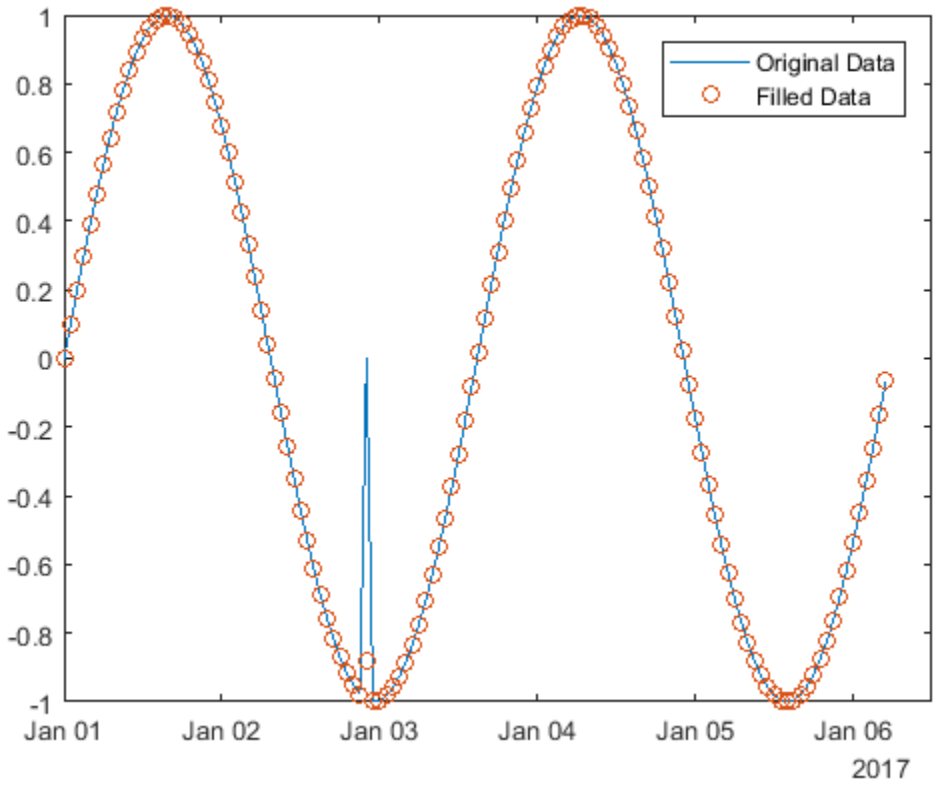

Display the threshold value that replaced the outlier.

```
lower(TF)
```

```
ans =

   -0.8779
```

Matrix of Data

Fill outliers for each row of a matrix.

Create a matrix of data containing outliers along the diagonal.

```
A = randn(5,5) + diag(1000*ones(1,5))
```

```
A =

   1.0e+03 *

    1.0005   -0.0013   -0.0013   -0.0002    0.0007
    0.0018    0.9996    0.0030   -0.0001   -0.0012
   -0.0023    0.0003    1.0007    0.0015    0.0007
    0.0009    0.0036   -0.0001    1.0014    0.0016
    0.0003    0.0028    0.0007    0.0014    1.0005
```

Fill outliers with zeros based on the data in each row, and display the new values.

```
[B,TF,lower,upper,center] = filloutliers(A,0,2);
B
```

```
B =

         0   -1.3077   -1.3499   -0.2050    0.6715
    1.8339         0    3.0349   -0.1241   -1.2075
   -2.2588    0.3426         0    1.4897    0.7172
    0.8622    3.5784   -0.0631         0    1.6302
    0.3188    2.7694    0.7147    1.4172         0
```

You can directly access the detected outlier values and their filled values using `TF` as an index vector.

```
[A(TF) B(TF)]
```

```
ans =

   1.0e+03 *

    1.0005         0
    0.9996         0
    1.0007         0
    1.0014         0
    1.0005         0
```

Outlier Thresholds

Find the outlier in a vector of data, and replace it using the `'clip'` method. Plot the original data, the filled data, and the thresholds and center value determined by the detection method. `'clip'` replaces the outlier with the upper threshold value.

```
x = 1:10;
A = [60 59 49 49 58 100 61 57 48 58];
[B,TF,lower,upper,center] = filloutliers(A,'clip');
plot(x,A,x,B,'o',x,lower*ones(1,10),x,upper*ones(1,10),x,center*ones(1,10))
legend('Original Data','Filled Data','Lower Threshold','Upper Threshold','Center Value
```

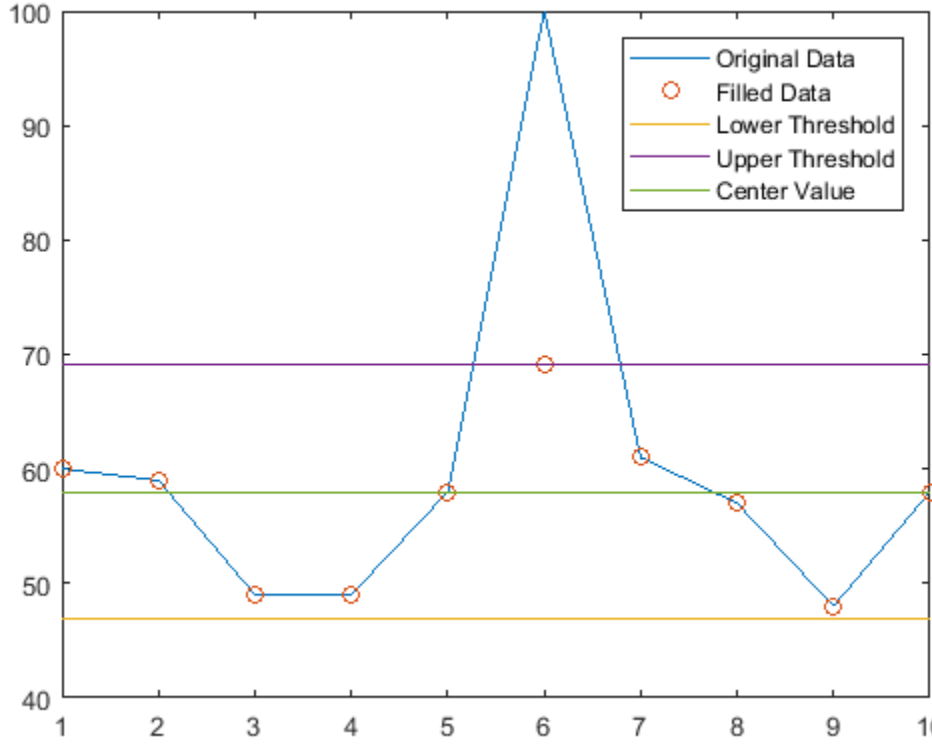

Input Arguments

A — Input data

vector | matrix | multidimensional array | table | timetable

Input data, specified as a vector, matrix, multidimensional array, table, or timetable.

If `A` is a table, then its variables must be of type `double` or `single`, or you can use the `'DataVariables'` name-value pair to list `double` or `single` variables explicitly. Specifying variables is useful when you are working with a table that contains variables with data types other than `double` or `single`.

If A is a timetable, then `filloutliers` operates only on the table elements. Row times must be unique and listed in ascending order.

Data Types: `double` | `single` | `table` | `timetable`

`fillmethod` — Fill method

numeric scalar | `'center'` | `'clip'` | `'previous'` | `'next'` | `'nearest'` | `'linear'` | `'spline'` | `'pchip'`

Fill method for replacing outliers, specified as a numeric scalar or one of the following:

Fill Method	Description
numeric scalar	Fills with specified scalar value
`'center'`	Fills with the center value determined by `findmethod`
`'clip'`	Fills with the lower threshold value for elements smaller than the lower threshold determined by `findmethod`. Fills with the upper threshold value for elements larger than the upper threshold determined by `findmethod`
`'previous'`	Fills with the previous non-outlier value
`'next'`	Fills with the next non-outlier value
`'nearest'`	Fills with the nearest non-outlier value
`'linear'`	Fills using linear interpolation of neighboring, non-outlier values
`'spline'`	Fills using piecewise cubic spline interpolation
`'pchip'`	Fills using shape-preserving piecewise cubic spline interpolation

Data Types: `double` | `single` | `char`

`findmethod` — Method for determining outliers

`'median'` (default) | `'mean'` | `'quartiles'` | `'grubbs'` | `'gesd'`

Method for determining outliers, specified as one of the following:

Method	Description
`'median'`	Outliers are defined as elements more than three scaled MAD from the median. The scaled MAD is defined as `c*median(abs(A-median(A)))` where `c=-1/(sqrt(2)*erfcinv(3/2))`.
`'mean'`	Outliers are defined as elements more than three standard deviations from the mean. This method is faster but less robust than `'median'`.
`'quartiles'`	Outliers are defined as elements more than 1.5 interquartile ranges above the upper quartile (75 percent) or below the lower quartile (25 percent). This method is useful when the data in `A` is not normally distributed.
`'grubbs'`	Applies Grubbs's test for outliers, which iteratively removes one outlier per iteration based on hypothesis testing. This method assumes that the data in `A` is normally distributed.
`'gesd'`	Applies the generalized extreme Studentized deviate test for outliers. This iterative method is similar to `'grubbs'`, but can perform better when there are multiple outliers masking each other.

`movmethod` — Moving method
`'movmedian'` | `'movmean'`

Moving method for determining outliers, specified as one of the following:

Method	Description
`'movmedian'`	Outliers are defined as elements more than three local scaled MAD from the local median over a window length specified by `window`.

Method	Description
`'movmean'`	Outliers are defined as elements more than three local standard deviations from the local mean over a window length specified by `window`.

`window` — Window length

positive integer scalar | two-element vector of positive integers | positive duration scalar | two-element vector of positive durations

Window length, specified as a positive integer scalar, a two-element vector of positive integers, a positive duration scalar, or a two-element vector of positive durations.

When `window` is a positive integer scalar, then the window is centered about the current element and contains `window-1` neighboring elements. If `window` is even, then the window is centered about the current and previous elements. If `window` is a two-element vector of positive integers `[b f]`, then the window contains the current element, `b` elements backward, and `f` elements forward.

When `A` is a timetable or `'SamplePoints'` is specified as a `datetime` or `duration` vector, `window` must be of type `duration`, and the windows are computed relative to the sample points.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a matrix `A`.

`filloutliers(A,fillmethod,1)` fills outliers according to the data in each column.



filloutliers(A,fillmethod,1)

`filloutliers(A,fillmethod,2)` fills outliers according to the data in each row.



filloutliers(A,fillmethod,2)

When `A` is a table or timetable, `dim` is not supported. `filloutliers` operates along each table or timetable variable separately.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `filloutliers(A,'center','mean','ThresholdFactor',4)`

`'ThresholdFactor'` — Detection threshold factor
nonnegative scalar

Detection threshold factor, specified as the comma-separated pair consisting of `'ThresholdFactor'` and a nonnegative scalar.

For methods `'grubbs'` and `'gesd'`, the detection threshold factor is a scalar ranging from 0 to 1. Values close to 0 result in a smaller number of outliers and values close to 1 result in a larger number of outliers. The default detection threshold factor is 0.5.

For methods `'movmedian'` and `'movmean'`, the detection threshold factor replaces the number of scaled MAD or standard deviations from the mean, which is 3 by default.

For the `'quartile'` method, the detection threshold factor replaces the number of interquartile ranges, which is 1.5 by default.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'SamplePoints'` — Sample points

vector

Sample points, specified as the comma-separated pair consisting of `'SamplePoints'` and a vector. The sample points represent the location of the data in `A`, and must be sorted and contain unique elements. Sample points do not need to be uniformly sampled. If `A` is a timetable, then the default sample points vector is the vector of row times. Otherwise, the default vector is `[1 2 3 ...]`.

Moving windows are defined relative to the sample points. For example, if `t` is a vector of times corresponding to the input data, then `filloutliers(rand(1,10),'previous','movmean',3,‘SamplePoints’,t)` has a window that represents the time interval between `t(i)-1.5` and `t(i)+1.5`.

When the sample points vector has data type `datetime` or `duration`, then the moving window length must have type `duration`.

Data Types: `single` | `double` | `datetime` | `duration`

`'DataVariables'` — Table variables

variable name | cell array of variable names | numeric vector | logical vector | function handle

Table variables, specified as the comma-separated pair consisting of `'DataVariables'` and a variable name, a cell array of variable names, a numeric vector, a logical vector, or a function handle. The `'DataVariables'` value indicates which columns of the input table to detect outliers in, and can be one of the following:

- A character vector specifying a single table variable name

- A cell array of character vectors where each element is a table variable name
- A vector of table variable indices
- A logical vector whose elements each correspond to a table variable, where `true` includes the corresponding variable and `false` excludes it
- A function handle that takes the table as input and returns a logical scalar

Example: `'Age'`

Example: `{'Height','Weight'}`

Example: `@isnumeric`

Data Types: `char` | `cell` | `double` | `single` | `logical` | `function_handle`

`'MaxNumOutliers'` — Maximum outlier threshold

positive scalar

Maximum outlier threshold, for the `'gesd'` method only, specified as the comma-separated pair consisting of `'MaxNumOutliers'` and a positive scalar. The `'MaxNumOutliers'` value specifies the maximum number of outliers returned by the `'gesd'` method. For example, `filloutliers(A,'gesd','MaxNumOutliers',5)` returns no more than five outliers.

The default value for `'MaxNumOutliers'` is the integer nearest to 10 percent of the number of elements in `A`. Setting a larger value for the maximum number of outliers can ensure that all outliers are detected, but at the cost of reduced computational efficiency.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'OutlierLocations'` — Known outlier indicator

vector | matrix | multidimensional array

Known outlier indicator, specified as the comma-separated pair consisting of `'OutlierLocations'` and a logical vector, matrix, or multidimensional array of the same size as `A`. The known outlier indicator elements can be `true` to indicate an outlier in the corresponding location of `A` or `false` otherwise. Specifying `'OutlierLocations'` turns off the default outlier detection method, and uses only the elements of the known outlier indicator to define outliers.

The `'OutlierLocations'` name-value pair cannot be specified when `findmethod` is specified.

The output TF is the same as the `'OutlierLocations'` value.

Data Types: `logical`

Output Arguments

B — Filled outlier array

vector | matrix | multidimensional array | table | timetable

Filled outlier array, returned as a vector, matrix, multidimensional array, table, or timetable. The elements of B are the same as those of A, but with all outliers replaced according to `fillmethod`.

Data Types: `double` | `single` | `table` | `timetable`

TF — Outlier indicator

vector | matrix | multidimensional array

Outlier indicator, returned as a vector, matrix, or multidimensional array. An element of TF is `true` when the corresponding element of A is an outlier and `false` otherwise. TF is the same size as A.

Data Types: `logical`

lower — Lower threshold

scalar | vector | matrix | multidimensional array

Lower threshold used by the outlier detection method, returned as a scalar, vector, matrix, or multidimensional array. For example, the lower value of the default outlier detection method is three MAD below the median of the input data. `lower` has the same size as A in all dimensions except for the operating dimension where the length is 1.

Data Types: `double` | `single`

upper — Upper threshold

scalar | vector | matrix | multidimensional array

Upper threshold used by the outlier detection method, returned as a scalar, vector, matrix, or multidimensional array. For example, the upper value of the default outlier detection method is three MAD above the median of the input data. `upper` has the same size as A in all dimensions except for the operating dimension where the length is 1.

Data Types: `double` | `single`

`center` — Center value
scalar | vector | matrix | multidimensional array

Center value used by the outlier detection method, returned as a scalar, vector, matrix, or multidimensional array. For example, the center value of the default outlier detection method is the median of the input data. `center` has the same size as `A` in all dimensions except for the operating dimension where the length is 1.

Data Types: `double` | `single`

Definitions

Median Absolute Deviation

For a random variable vector A made up of N scalar observations, the median absolute deviation (MAD) is defined as

$$\text{MAD} = \text{median}\left(\left| A_i - \text{median}(A) \right|\right)$$

for $i = 1,2,\ldots,N$.

See Also

See Also
`fillmissing` | `ismissing` | `isoutlier` | `rmmissing`

Introduced in R2017a

filter

1-D digital filter

Syntax

```
y = filter(b,a,x)
y = filter(b,a,x,zi)
y = filter(b,a,x,zi,dim)
[y,zf] = filter( ___ )
```

Description

`y = filter(b,a,x)` filters the input data `x` using a rational transfer function defined by the numerator and denominator coefficients `b` and `a`.

If `a(1)` is not equal to `1`, then `filter` normalizes the filter coefficients by `a(1)`. Therefore, `a(1)` must be nonzero.

- If `x` is a vector, then `filter` returns the filtered data as a vector of the same size as `x`.
- If `x` is a matrix, then `filter` acts along the first dimension and returns the filtered data for each column.
- If `x` is a multidimensional array, then `filter` acts along the first array dimension whose size does not equal 1.

`y = filter(b,a,x,zi)` uses initial conditions `zi` for the filter delays. The length of `zi` must equal `max(length(a),length(b))-1`.

`y = filter(b,a,x,zi,dim)` acts along dimension `dim`. For example, if `x` is a matrix, then `filter(b,a,x,zi,2)` returns the filtered data for each row.

`[y,zf] = filter( ___ )` also returns the final conditions `zf` of the filter delays, using any of the previous syntaxes.

Examples

Moving-Average Filter

A moving-average filter is a common method used for smoothing noisy data. This example uses the `filter` function to compute averages along a vector of data.

Create a 1-by-100 row vector of sinusoidal data that is corrupted by random noise.

```
t = linspace(-pi,pi,100);
rng default  %initialize random number generator
x = sin(t) + 0.25*rand(size(t));
```

A moving-average filter slides a window of length $windowSize$ along the data, computing averages of the data contained in each window. The following difference equation defines a moving-average filter of a vector x:

$$y(n) = \frac{1}{windowSize}\left(x(n) + x(n-1) + \ldots + x(n-(windowSize-1))\right).$$

For a window size of 5, compute the numerator and denominator coefficients for the rational transfer function.

```
windowSize = 5;
b = (1/windowSize)*ones(1,windowSize);
a = 1;
```

Find the moving average of the data and plot it against the original data.

```
y = filter(b,a,x);

plot(t,x)
hold on
plot(t,y)
legend('Input Data','Filtered Data')
```

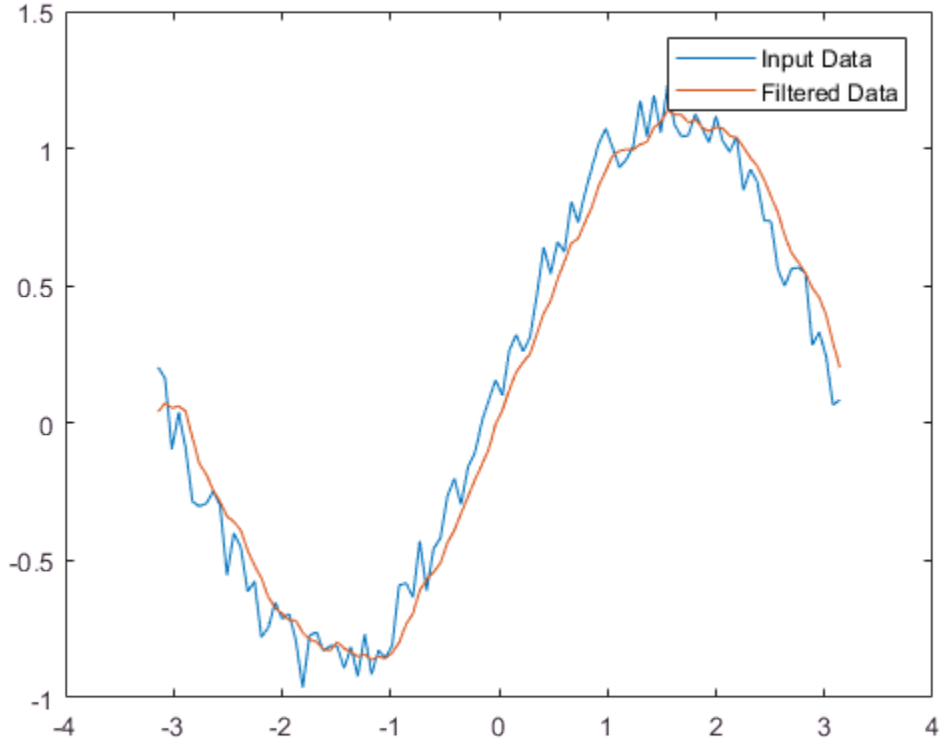

Filter Matrix Rows

This example filters a matrix of data with the following rational transfer function.

$$H(z) = \frac{b(1)}{a(1) + a(2)z^{-1}} = \frac{1}{1 - 0.2z^{-1}}$$

Create a 2-by-15 matrix of random input data.

```
rng default  %initialize random number generator
x = rand(2,15);
```

Define the numerator and denominator coefficients for the rational transfer function.

```
b = 1;
a = [1 -0.2];
```

Apply the transfer function along the second dimension of `x` and return the 1-D digital filter of each row. Plot the first row of original data against the filtered data.

```
y = filter(b,a,x,[],2);

t = 0:length(x)-1;  %index vector

plot(t,x(1,:))
hold on
plot(t,y(1,:))
legend('Input Data','Filtered Data')
title('First Row')
```

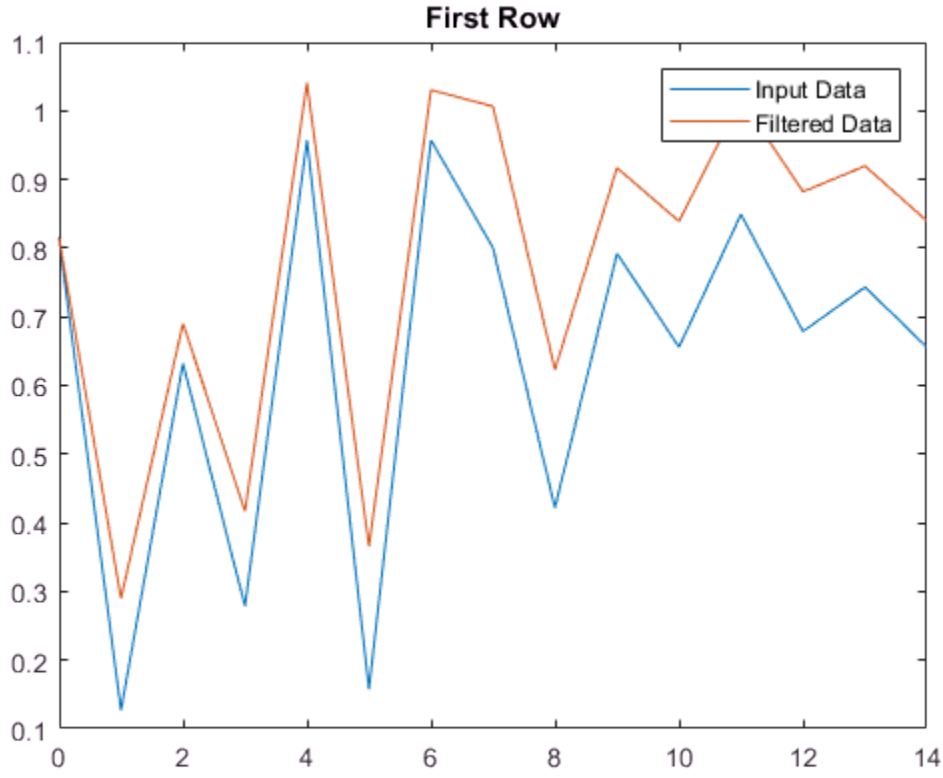

Plot the second row of input data against the filtered data.

```
figure
plot(t,x(2,:))
hold on
plot(t,y(2,:))
legend('Input Data','Filtered Data')
title('Second Row')
```

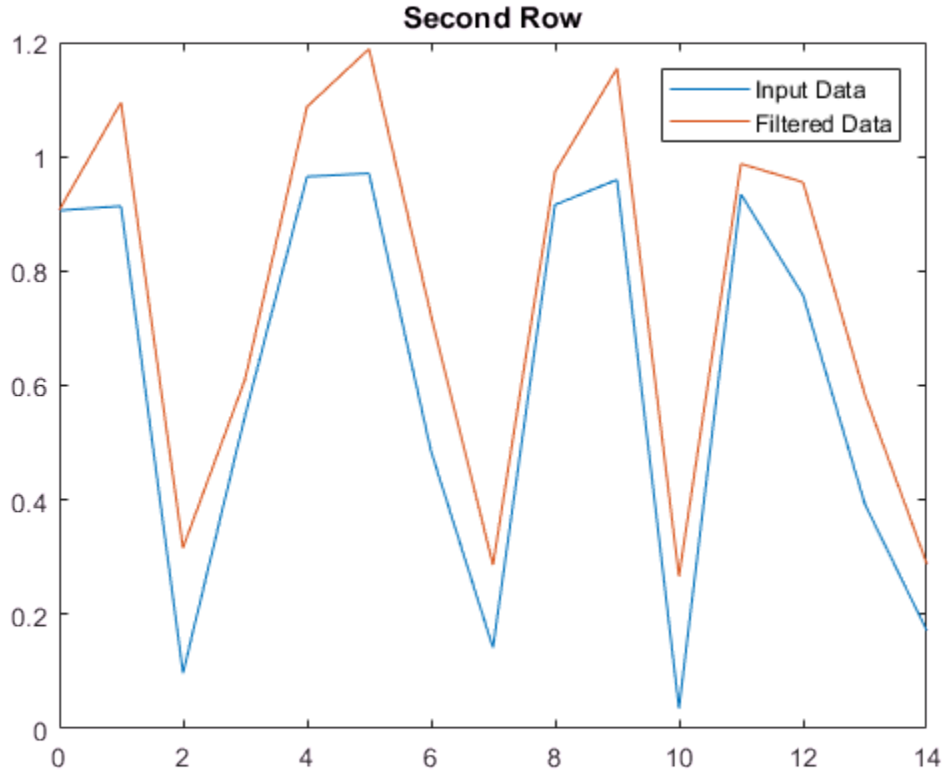

Filter Data in Sections

Use initial and final conditions for filter delays to filter data in sections, especially if memory limitations are a consideration.

Generate a large random data sequence and split it into two segments, `x1` and `x2`.

```
x = randn(10000,1);

x1 = x(1:5000);
x2 = x(5001:end);
```

The whole sequence, `x`, is the vertical concatenation of `x1` and `x2`.

Define the numerator and denominator coefficients for the rational transfer function,

$$H(z) = \frac{b(1) + b(2)z^{-1}}{a(1) + a(2)z^{-1}} = \frac{2 + 3z^{-1}}{1 + 0.2z^{-1}}.$$

```
b = [2,3];
a = [1,0.2];
```

Filter the subsequences `x1` and `x2` one at a time. Output the final conditions from filtering `x1` to store the internal status of the filter at the end of the first segment.

```
[y1,zf] = filter(b,a,x1);
```

Use the final conditions from filtering `x1` as initial conditions to filter the second segment, `x2`.

```
y2 = filter(b,a,x2,zf);
```

`y1` is the filtered data from `x1`, and `y2` s the filtered data from `x2`. The entire filtered sequence is the vertical concatenation of `y1` and `y2`.

Filter the entire sequence simultaneously for comparison.

```
y = filter(b,a,x);
```

```
isequal(y,[y1;y2])
```

```
ans = logical
   1
```

Input Arguments

b — Numerator coefficients of rational transfer function

vector

Numerator coefficients of the rational transfer function, specified as a vector.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

a — Denominator coefficients of rational transfer function

vector

Denominator coefficients of the rational transfer function, specified as a vector.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical
Complex Number Support: Yes

x — Input data

vector | matrix | multidimensional array

Input data, specified as a vector, matrix, or multidimensional array.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical
Complex Number Support: Yes

zi — Initial conditions for filter delays

[ ] (default) | vector | matrix | multidimensional array

Initial conditions for filter delays, specified as a vector, matrix, or multidimensional array.

- If zi is a vector, then its length must be max(length(a),length(b))-1.
- If zi is a matrix or multidimensional array, then the size of the leading dimension must be max(length(a),length(b))-1. The size of each remaining dimension must match the size of the corresponding dimension of x. For example, consider using filter along the second dimension (dim = 2) of a 3-by-4-by-5 array x. The array zi must have size [max(length(a),length(b))-1]-by-3-by-5.

The default value, specified by [], initializes all filter delays to zero.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional input array, `x`.

- If `dim = 1`, then `filter(b,a,x,zi,1)` works along the rows of `x` and returns the filter applied to each column.



- If `dim = 2`, then `filter(b,a,x,zi,2)` works along the columns of `x` and returns the filter applied to each row.



If `dim` is greater than `ndims(x)`, then `filter` returns `x`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Output Arguments

y — Filtered data

vector | matrix | multidimensional array

Filtered data, returned as a vector, matrix, or multidimensional array of the same size as the input data, `x`.

If `x` is of type `single`, then `filter` natively computes in single precision, and `y` is also of type `single`. Otherwise, `y` is returned as type `double`.

Data Types: `double` | `single`

`zf` — Final conditions for filter delays
vector | matrix | multidimensional array

Final conditions for filter delays, returned as a vector, matrix, or multidimensional array.

- If `x` is a vector, then `zf` is a column vector of length `max(length(a),length(b))-1`.
- If `x` is a matrix or multidimensional array, then `zf` is an array of column vectors of length `max(length(a),length(b))-1`, such that the number of columns in `zf` is equivalent to the number of columns in `x`. For example, consider using `filter` along the second dimension (`dim = 2`) of a 3-by-4-by-5 array `x`. The array `zf` has size [`max(length(a),length(b))-1`]-by-3-by-5.

Data Types: `double` | `single`

Definitions

Rational Transfer Function

The input-output description of the `filter` operation on a vector in the Z-transform domain is a rational transfer function. A rational transfer function is of the form,

$$Y(z) = \frac{b(1) + b(2)z^{-1} + \ldots + b(n_b + 1)z^{-n_b}}{1 + a(2)z^{-1} + \ldots + a(n_a + 1)z^{-n_a}} X(z),$$

which handles both FIR and IIR filters [1]. n_a is the feedback filter order, and n_b is the feedforward filter order.

You also can express the rational transfer function as the following difference equation,

$$\begin{aligned} a(1)y(n) = {} & b(1)x(n) + b(2)x(n-1) + \ldots + b(n_b + 1)x(n - n_b) \\ & -a(2)y(n-1) - \ldots - a(n_a + 1)y(n - n_a). \end{aligned}$$

Furthermore, you can represent the rational transfer function using its direct form II transposed implementation, as in the following diagram. Due to normalization, assume `a(1) = 1`.

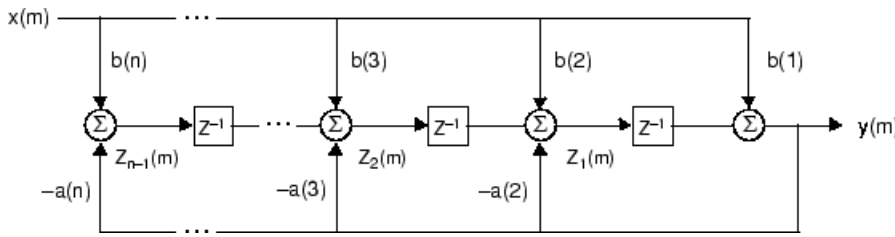

The operation of `filter` at sample m is given by the time domain difference equations

$$
\begin{aligned}
y(m) &= b(1)x(m) + z_1(m-1) \\
z_1(m) &= b(2)x(m) + z_2(m-1) - a(2)y(m) \\
\vdots \quad &= \quad \vdots \qquad\qquad \vdots \\
z_{n-2}(m) &= b(n-1)x(m) + z_{n-1}(m-1) - a(n-1)y(m) \\
z_{n-1}(m) &= b(n)x(m) - a(n)y(m).
\end{aligned}
$$

Tips

- If you have the Signal Processing Toolbox™, you can design a filter, `d`, using `designfilt`. Then, you can use `Y = filter(d,X)` to filter your data.

References

[1] Oppenheim, Alan V., Ronald W. Schafer, and John R. Buck. *Discrete-Time Signal Processing*. Upper Saddle River, NJ: Prentice-Hall, 1999.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If supplied, `dim` must be a constant.

- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

See Also

`conv` | `designfilt` | `filter2` | `filtfilt` | `filtic`

Topics

“Filter Data”

Introduced before R2006a

filter2

2-D digital filter

Syntax

```
Y = filter2(H,X)
Y = filter2(H,X,shape)
```

Description

`Y = filter2(H,X)` applies a finite impulse response filter to a matrix of data `X` according to coefficients in a matrix `H`.

`Y = filter2(H,X,shape)` returns a subsection of the filtered data according to `shape`. For example, `Y = filter2(H,X,'valid')` returns only filtered data computed without zero-padded edges.

Examples

2-D Pedestal

You can digitally filter images and other 2-D data using the `filter2` function, which is closely related to the `conv2` function.

Create and plot a 2-D pedestal with interior height equal to one.

```
A = zeros(10);
A(3:7,3:7) = ones(5);
mesh(A)
```

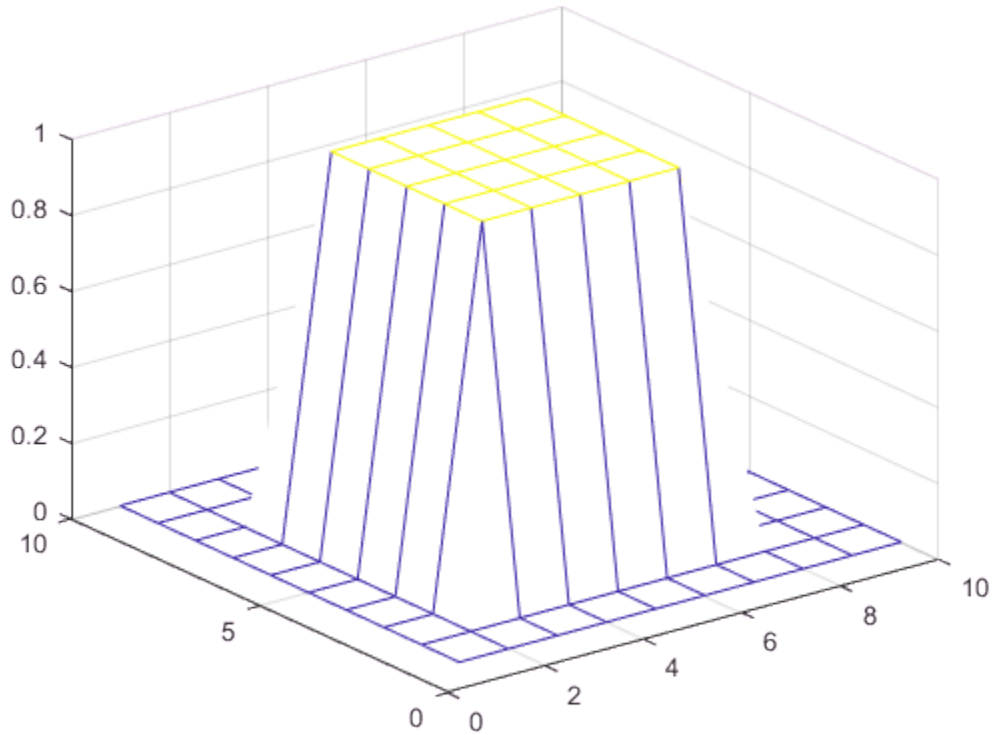

Filter the data in A according to a filter coefficient matrix H, and return the full matrix of filtered data.

```
H = [1 2 1; 0 0 0; -1 -2 -1];
Y = filter2(H,A,'full');
mesh(Y)
```

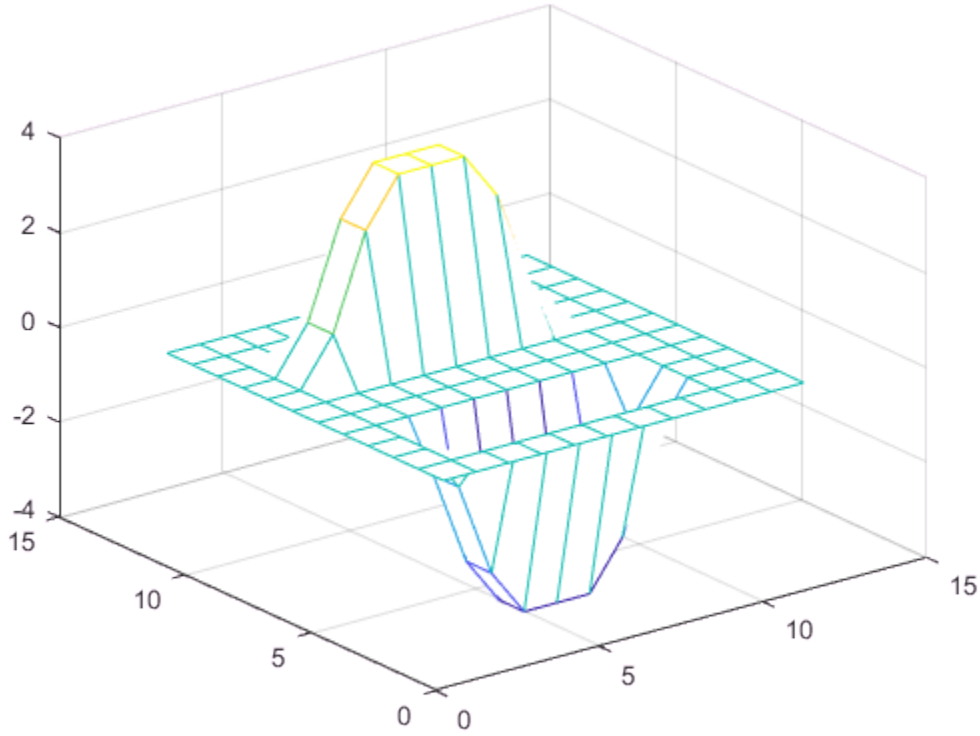

Rotate H 180 degrees and convolve the result with A. The output is equivalent to filtering the data in A with the coefficients in H.

```
C = conv2(A,rot90(H,2));
mesh(C)
```

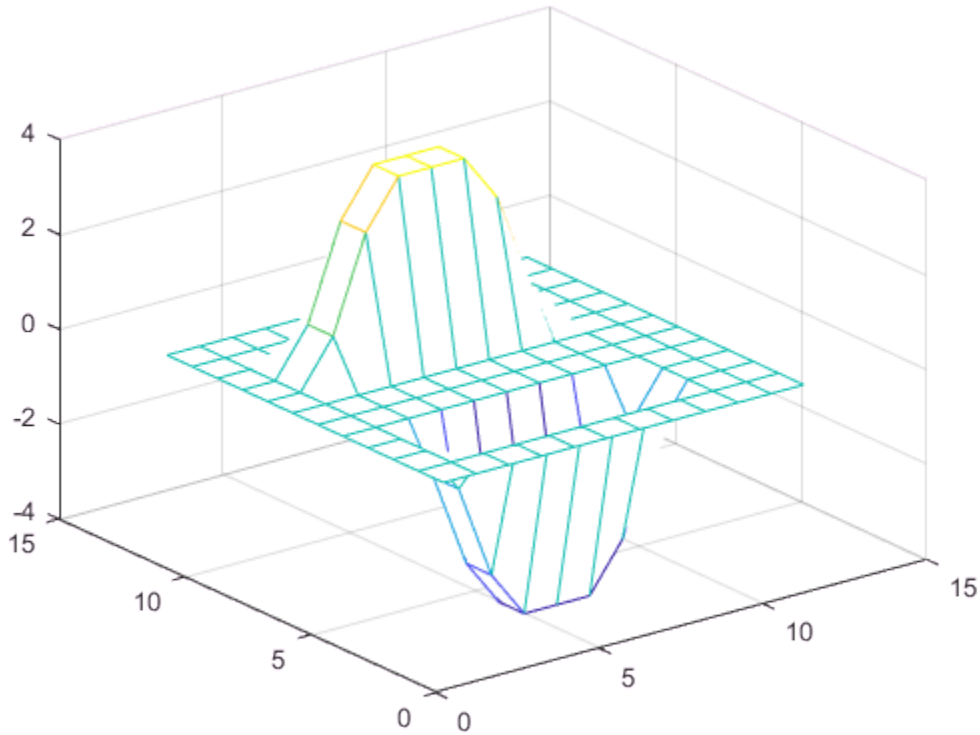

Input Arguments

H — Coefficients of rational transfer function

matrix

Coefficients of the rational transfer function, specified as a matrix.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

X — Input data
matrix

Input data, specified as a matrix. If one or both of X and H are of type single, then the output is also of type single. Otherwise, filter2 returns type double.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical
Complex Number Support: Yes

shape — Subsection of filtered data
'same' (default) | 'full' | 'valid'

Subsection of the filtered data, specified as one of these values:

- 'same' — Return the central part of the filtered data, which is the same size as X.
- 'full' — Return the full 2-D filtered data.
- 'valid' — Return only parts of the filtered data that are computed without zero-padded edges.

Algorithms

The filter2 function filters data by taking the 2-D convolution of the input X and the coefficient matrix H rotated 180 degrees. Specifically, filter2(H,X,shape) is equivalent to conv2(X,rot90(H,2),shape).

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also
conv2 | filter | rot90

Introduced before R2006a

fimplicit

Plot implicit function

Syntax

```
fimplicit(f)
fimplicit(f,interval)
fimplicit(ax, ___ )

fimplicit( ___ ,LineSpec)
fimplicit( ___ ,Name,Value)
fp = fimplicit( ___ )
```

Description

`fimplicit(f)` plots the implicit function defined by `f(x,y) = 0` over the default interval `[-5 5]` for `x` and `y`.

`fimplicit(f,interval)` specifies the plotting interval for `x` and `y`.

`fimplicit(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes. Specify the axes as the first input argument, prior to any of the previous input arguments.

`fimplicit( ___ ,LineSpec)` specifies the line style, marker symbol, and line color. For example, `'-r'` plots a red line.

`fimplicit( ___ ,Name,Value)` specifies line properties using one or more name-value pair arguments. For example, `'LineWidth',2` specifies a line width of 2 points.

`fp = fimplicit( ___ )` returns the `ImplicitFunctionLine` object. Use `fp` to access and modify properties of the line after it is created. For a list of properties, see ImplicitFunctionLine Properties.

Examples

Plot Implicit Function

Plot the hyperbola described by the function $x^2 - y^2 - 1 = 0$ over the default interval of `[-5 5]` for x and y.

```
fimplicit(@(x,y) x.^2 - y.^2 - 1)
```

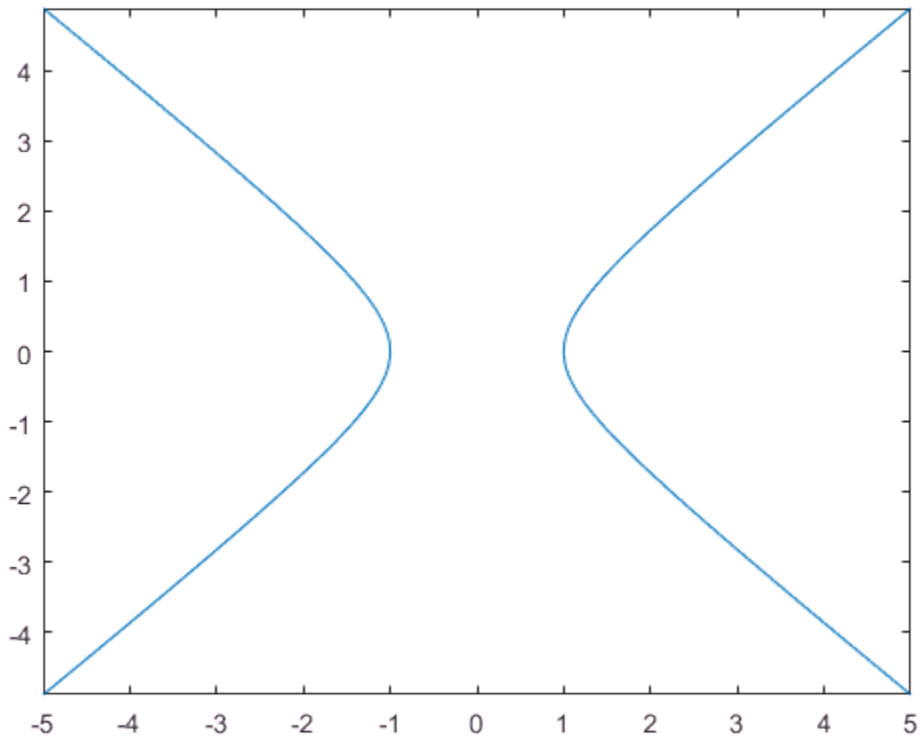

Specify Plotting Interval

Plot the function $x^2 + y^2 - 3 = 0$ over the intervals `[-3 0]` for `x` and `[-2 2]` for `y`.

```
f = @(x,y) x.^2 + y.^2 - 3;
fimplicit(f,[-3 0 -2 2])
```

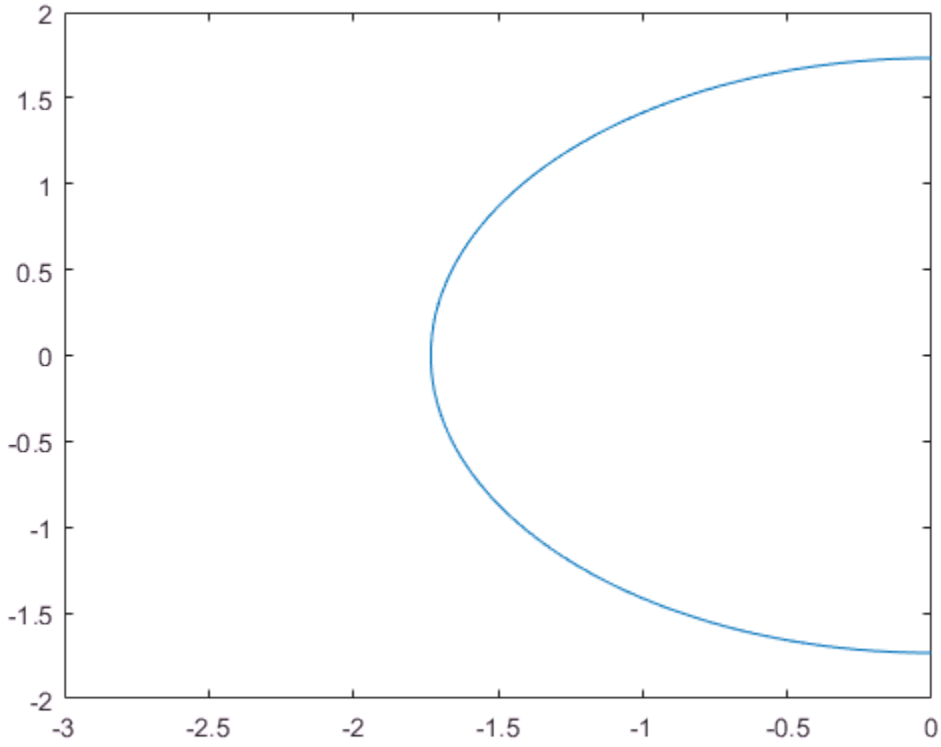

Modify Appearance of Implicit Plot

Plot two circles centered at `(0,0)` with different radius values. For the first circle, use a dotted, red line. For the second circle, use a dashed, green line with a line width of 2 points.

```
f1 = @(x,y) x.^2 + y.^2 - 1;
fimplicit(f1,':r')

hold on
```

```
f2 = @(x,y) x.^2 + y.^2 - 2;
fimplicit(f2,'--g','LineWidth',2)
hold off
```

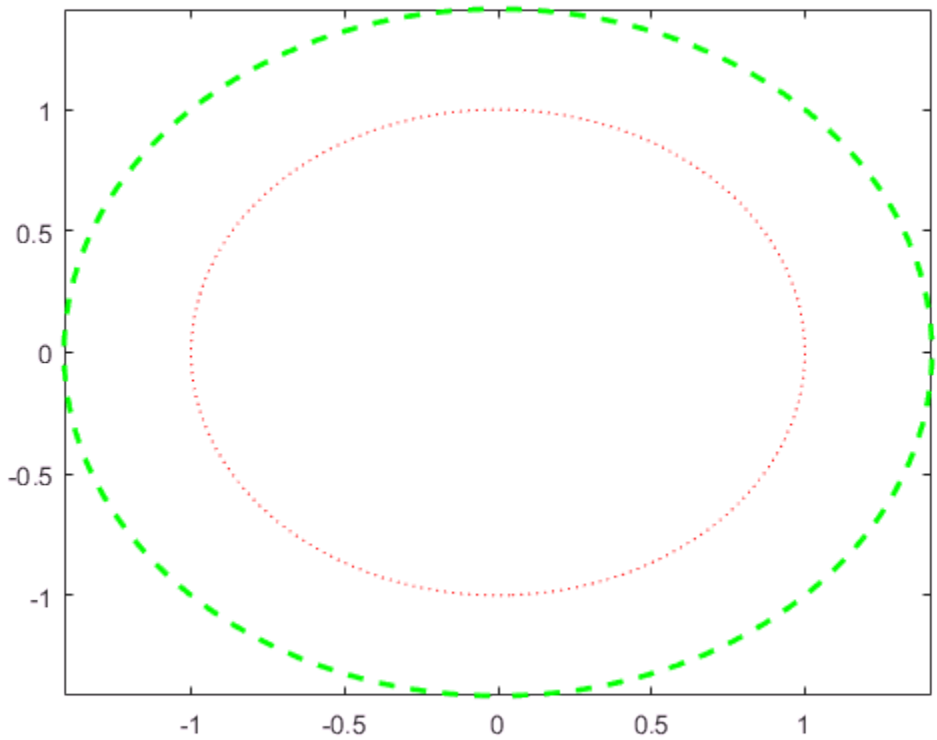

Modify Implicit Plot After Creation

Plot the implicit function $y \sin(x) + x \cos(y) - 1 = 0$ and assign the implicit function line object to the variable `fp`.

```
fp = fimplicit(@(x,y) y.*sin(x) + x.*cos(y) - 1)
```

```
fp =
```

```
ImplicitFunctionLine with properties:

   Function: @(x,y)y.*sin(x)+x.*cos(y)-1
      Color: [0 0.4470 0.7410]
  LineStyle: '-'
  LineWidth: 0.5000

Show all properties
```

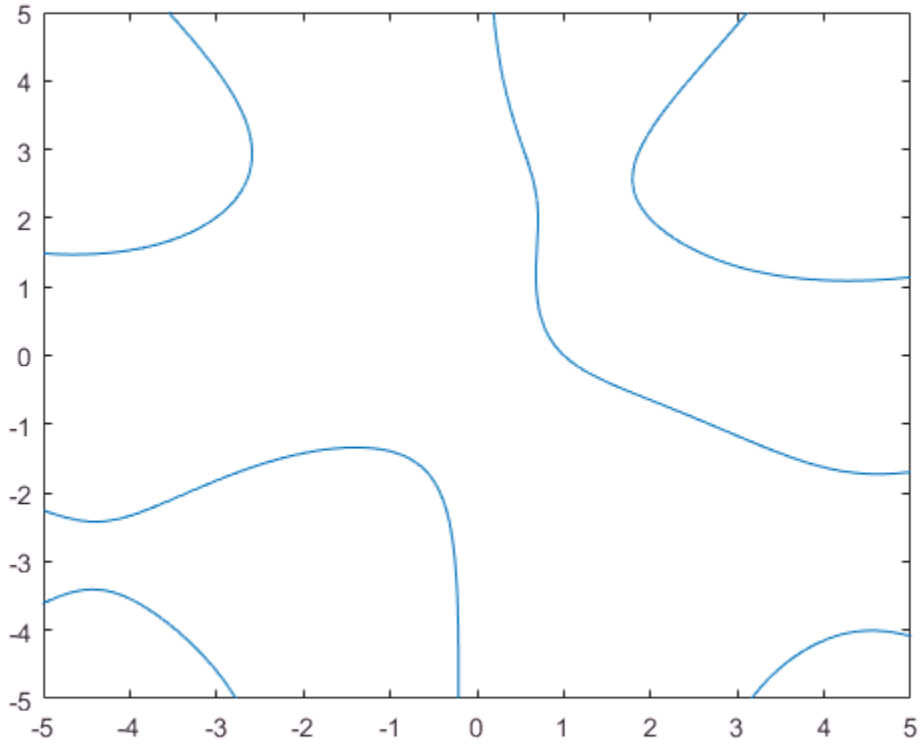

Use `fp` to access and modify properties of the implicit function line object after it is created. For example, change the color, line style, and line width.

```
fp.Color = 'r';
```

```
fp.LineStyle = '--';
fp.LineWidth = 2;
```

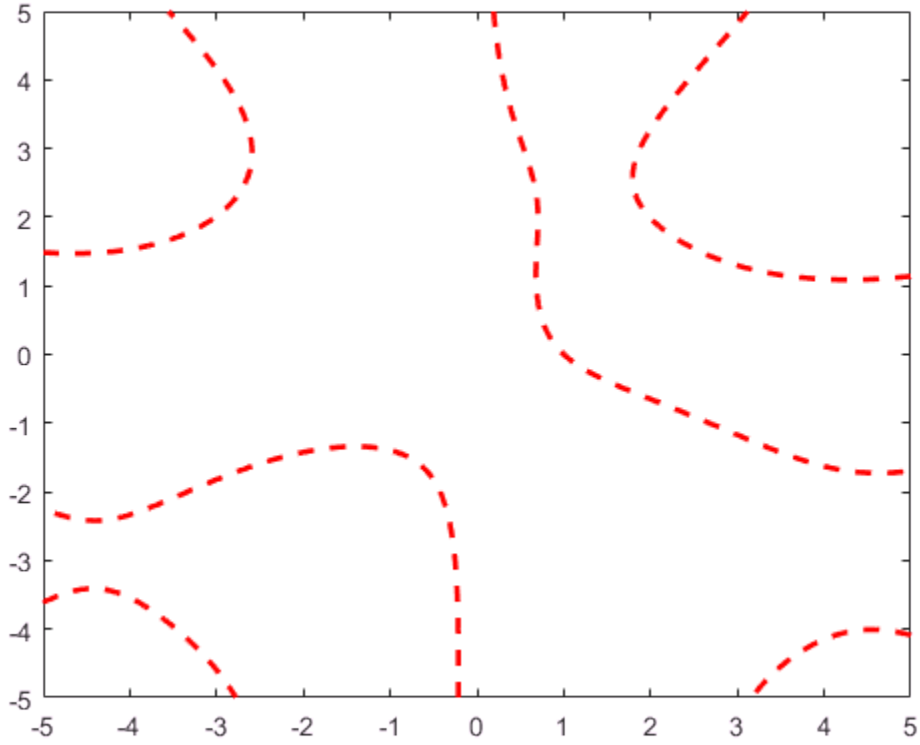

Input Arguments

f — Implicit function to plot
function handle

Implicit function to plot, specified as a function handle to a named or anonymous function.

Specify a function of the form `z = f(x,y)`. The function must accept two matrix input arguments and return a matrix output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `fimplicit(@(x,y) x.^2 - y.^2 + 1)`

`interval` — Plotting interval for x and y

`[-5 5]` (default) | two-element vector | four-element vector

Plotting interval for `x` and `y`, specified in one of these forms:

- Two-element vector of the form `[min max]` — Use the same plotting interval of `[min max]` for both `x` and `y`.
- Four-element vector of the form `[xmin xmax ymin ymax]` — Use different plotting intervals for `x` and `y`. Plot over the interval `[xmin xmax]` for `x` and `[ymin ymax]` for `y`.

Example: `fimplicit(f,[-2 3 -5 0])`

`LineSpec` — Line style, marker symbol, and color

character vector of symbols

Line style, marker symbol, and color, specified as a character vector of symbols. The symbols can appear in any order. You do not need to specify all three characteristics (line style, marker symbol, and color). For example, if you omit the line style and specify the marker, then the plot shows only the markers and no line.

Example: `fimplicit(f,'--or')` plots a red, dashed line with circle markers.

Line Style	Description
`-`	Solid line (default)
`--`	Dashed line
`:`	Dotted line
`-.`	Dash-dot line

Marker	Description
`o`	Circle
`+`	Plus sign

Marker	Description
*	Asterisk
.	Point
x	Cross
s	Square
d	Diamond
^	Upward-pointing triangle
v	Downward-pointing triangle
>	Right-pointing triangle
<	Left-pointing triangle
p	Pentagram
h	Hexagram

Color	Description
y	yellow
m	magenta
c	cyan
r	red
g	green
b	blue
w	white
k	black

ax — Axes object
axes object

Axes object. If you do not specify the axes, then `fimplicit` uses the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `fimplicit(f,'MeshDensity',50,'LineWidth',2)` specifies the number of evaluation points and the line width.

The `ImplicitFunctionLine` properties listed here are only a subset. For a complete list, see ImplicitFunctionLine Properties.

`'MeshDensity'` — Number of evaluation points per direction
`151` (default) | scalar

Number of evaluation points per direction, specified as a scalar.

`'Color'` — Line color
`[0 0 1]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `'blue'`

Example: `[0 0 1]`

`'LineStyle'` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`'Marker'` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'x'` | `...`

Marker symbol, specified as one of the markers listed in this table. By default, the line does not have markers. Specifying a marker symbol adds markers at selected points along the line.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square

Value	Description
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'+'`

Example: `'diamond'`

`'MarkerSize'` — Marker size

`6` (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`'MarkerEdgeColor'` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

'MarkerFaceColor' — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color specified in the MarkerEdgeColor property.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]

Long Name	Short Name	RGB Triplet
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Tips

- Use element-wise operators for the best performance and to avoid a warning message. For example, use `x.*y` instead of `x*y`. For more information, see "Array vs. Matrix Operations".
- When you zoom in on the chart, `fimplicit` recalculates the data, which can reveal hidden details.

See Also

See Also

Functions

`fcontour` | `fimplicit3` | `fplot` | `fplot3` | `fsurf`

Properties

ImplicitFunctionLine Properties

Introduced in R2016b

fimplicit3

Plot 3-D implicit function

Syntax

```
fimplicit3(f)
fimplicit3(f,interval)
fimplicit3(ax, ___ )

fimplicit3( ___ ,LineSpec)
fimplicit3( ___ ,Name,Value)
fs = fimplicit3( ___ )
```

Description

`fimplicit3(f)` plots the 3-D implicit function defined by `f(x,y,z) = 0` over the default interval `[-5 5]` for `x`, `y`, and `z`.

`fimplicit3(f,interval)` specifies the plotting interval for `x`, `y`, and `z`.

`fimplicit3(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes. Specify the axes as the first input argument, prior to any of the previous input arguments.

`fimplicit3( ___ ,LineSpec)` specifies the line style, marker symbol, and line color. For example, `'-r'` specifies red lines.

`fimplicit3( ___ ,Name,Value)` specifies surface properties using one or more name-value pair arguments. For example, `'FaceAlpha',0.6` specifies a transparency value of `0.6` for a semi-transparent surface.

`fs = fimplicit3( ___ )` returns the `ImplicitFunctionSurface` object. Use `fs` to access and modify properties of the surface after it is created. For a list of properties, see ImplicitFunctionSurface Properties.

Examples

Plot 3-D Implicit Function

Plot the hyperboloid $x^2 + y^2 - z^2 = 0$ over the default interval of $[-5, 5]$ for x, y, and z.

```
f = @(x,y,z) x.^2 + y.^2 - z.^2;
fimplicit3(f)
```

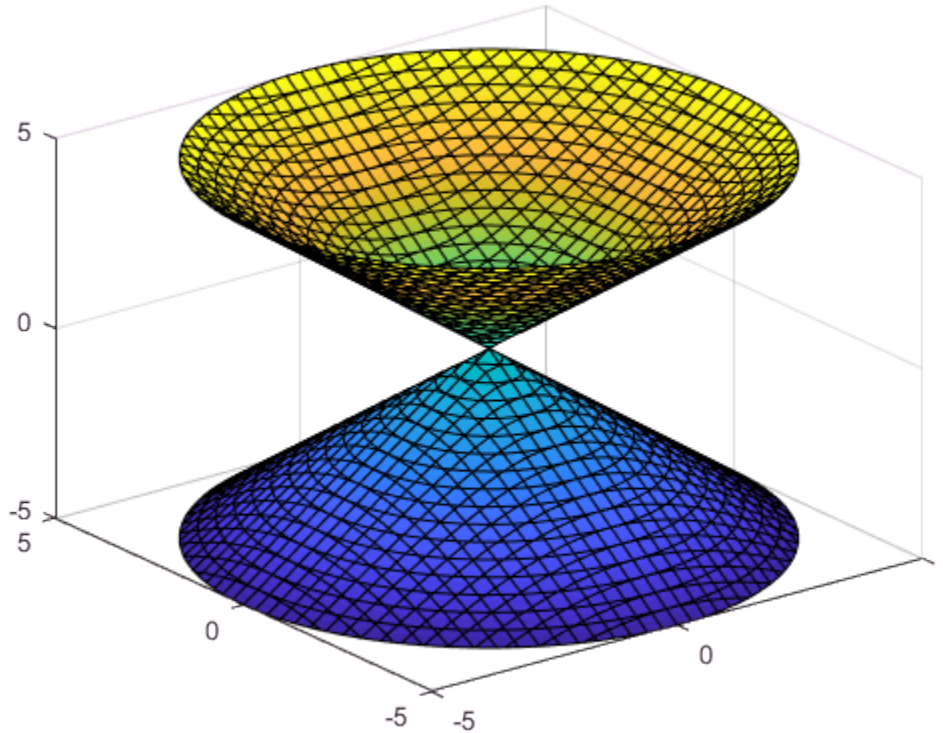

Specify Plotting Interval

Plot the upper half of the hyperboloid $x^2 + y^2 - z^2 = 0$ by specifying the plotting interval as [0 5] for z. For x and y, use the default interval `[-5 5]`.

```
f = @(x,y,z) x.^2 + y.^2 - z.^2;
interval = [-5 5 -5 5 0 5];
fimplicit3(f,interval)
```

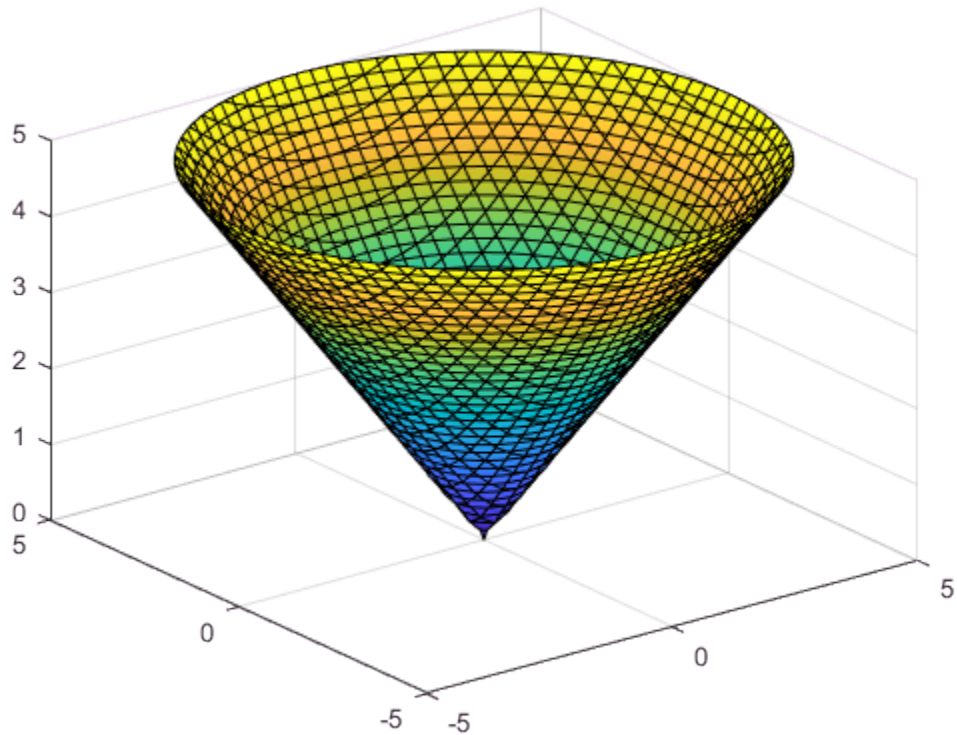

Modify Appearance of Implicit Surface

Plot the implicit surface $x^2 + y^2 - z^2 = 0$. Remove the lines by setting the `EdgeColor` property to `'none'`. Add transparency by setting the `FaceAlpha` property to a value between 0 and 1.

```
f = @(x,y,z) x.^2 + y.^2 - z.^2;
fimplicit3(f,'EdgeColor','none','FaceAlpha',.5)
```

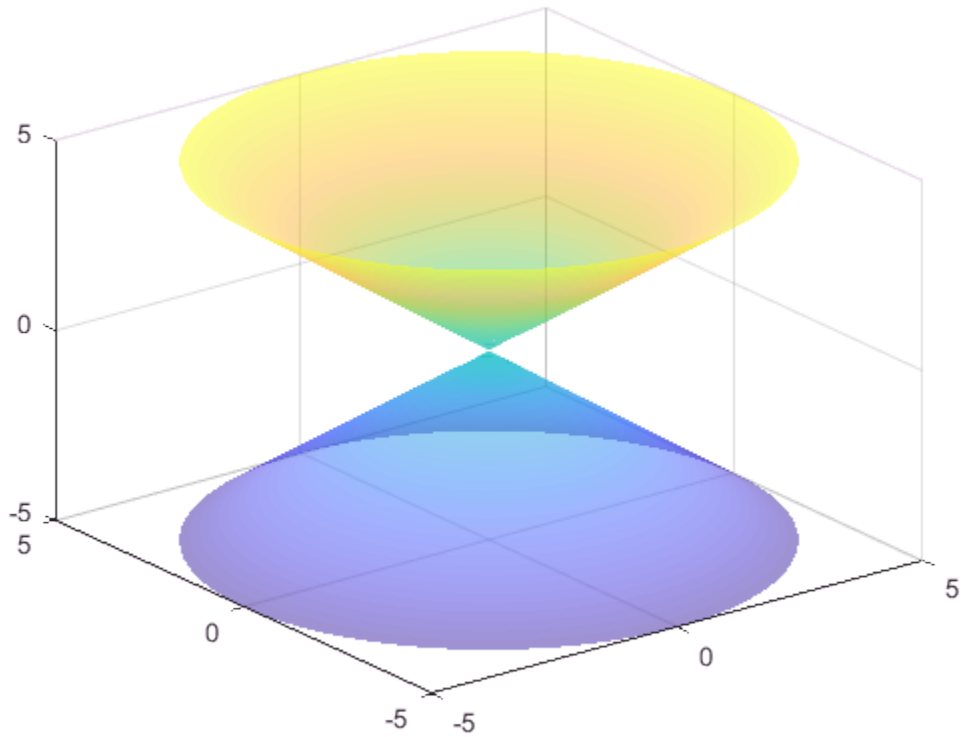

Modify Implicit Surface After Creation

Plot an implicit surface and assign the implicit surface object to the variable `fs`.

```
f = @(x,y,z) 1/x.^2 - 1/y.^2 + 1/z.^2;
fs = fimplicit3(f)

fs =
  ImplicitFunctionSurface with properties:

     Function: @(x,y,z)1/x.^2-1/y.^2+1/z.^2
    EdgeColor: [0 0 0]
    LineStyle: '-'
    FaceColor: 'interp'

  Show all properties
```

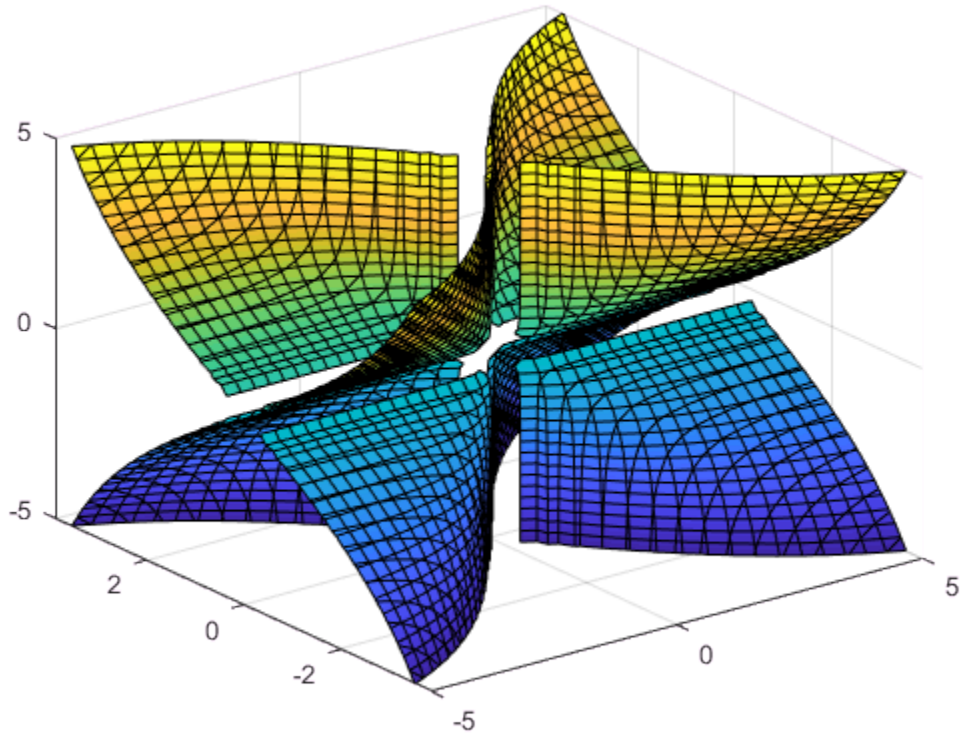

Use `fs` to access and modify properties of the implicit surface after it is created. For example, show only the positive *x* values by setting the `XRange` property to `[0 5]`. Remove the lines by setting the `EdgeColor` property to `'none'`. Add transparency by setting the `FaceAlpha` property to `0.8`.

```
fs.XRange = [0 5];
fs.EdgeColor = 'none';
fs.FaceAlpha = 0.8;
```

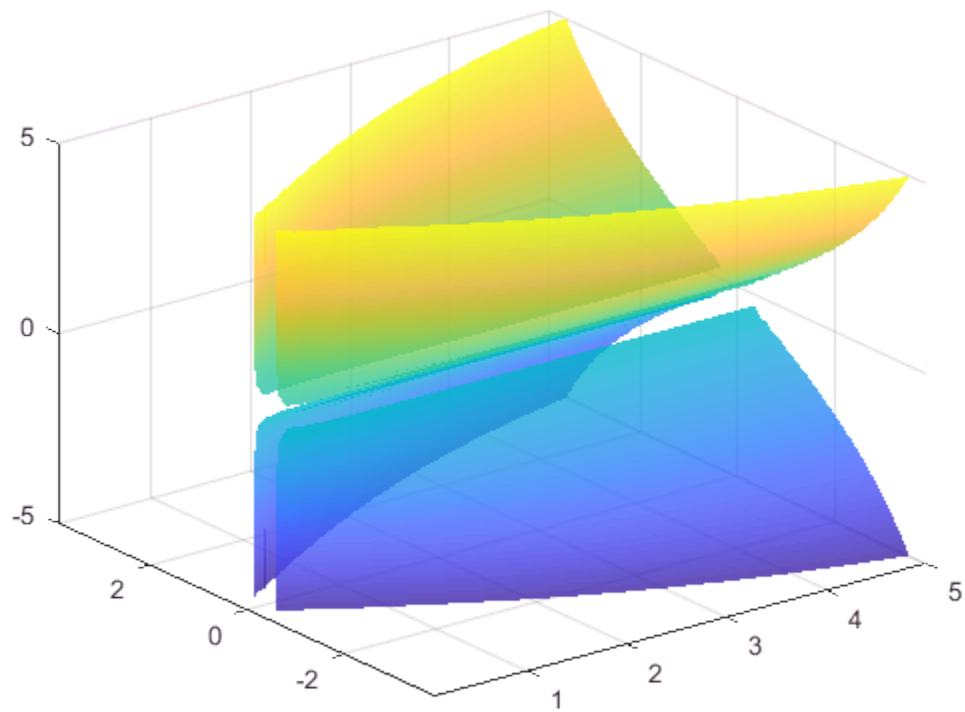

Input Arguments

`f` — 3-D implicit function to plot

function handle

3-D implicit function to plot, specified as a function handle to a named or anonymous function.

Specify a function of the form `w = f(x,y,z)`. The function must accept three 3-D array input arguments and return a 3-D array output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `fimplicit3(@(x,y,z) x.^2 + y.^2 - z.^2)`

`interval` — Plotting interval for `x`, `y`, and `z`

`[-5 5]` (default) | two-element vector | six-element vector

Plotting interval for `x`, `y`, and `z`, specified in one of these forms:

- Two-element vector of form `[min max]` — Use the same plotting interval of `[min max]` for `x`, `y`, and `z`.
- Six-element vector of form `[xmin xmax ymin ymax zmin zmax]` — Use different plotting intervals for `x`, `y`, and `z`. Plot over the interval `[xmin xmax]` for `x`, over `[ymin ymax]` for `y`, and over `[zmin zmax]` for `z`.

Example: `fimplicit3(f,[-2 3 -4 5 -3 3])`

`LineSpec` — Line style, marker symbol, and color

character vector of symbols

Line style, marker symbol, and color, specified as a character vector of symbols. The symbols can appear in any order. You do not need to specify all three characteristics (line style, marker symbol, and color). For example, if you omit the line style and specify the marker, then the plot shows only the markers and no line.

Example: `fimplicit3(f,'--or')` plots a red, dashed line with circle markers.

Line Style	Description
-	Solid line (default)
- -	Dashed line

Line Style	Description
`:`	Dotted line
`-.`	Dash-dot line

Marker	Description
`o`	Circle
`+`	Plus sign
`*`	Asterisk
`.`	Point
`x`	Cross
`s`	Square
`d`	Diamond
`^`	Upward-pointing triangle
`v`	Downward-pointing triangle
`>`	Right-pointing triangle
`<`	Left-pointing triangle
`p`	Pentagram
`h`	Hexagram

Color	Description
`y`	yellow
`m`	magenta
`c`	cyan
`r`	red
`g`	green
`b`	blue
`w`	white
`k`	black

`ax` — Axes object

axes object

Axes object. If you do not specify the axes, then `fimplicit3` uses the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `fimplicit3(f,'MeshDensity',50,'FaceAlpha',0.5)` specifies the number of evaluation points and a transparency value.

The `ImplicitFunctionSurface` properties listed here are only a subset. For a complete list, see ImplicitFunctionSurface Properties.

`'MeshDensity'` — Number of evaluation points per direction
`35` (default) | scalar

Number of evaluation points per direction, specified as a scalar.

`'FaceAlpha'` — Face transparency
`1` (default) | scalar in range `[0 1]`

Face transparency, specified as a scalar in the range `[0,1]`. Use uniform transparency across all of the faces. A value of `1` is fully opaque and `0` is completely transparent. Values between `0` and `1` are semitransparent.

`'FaceColor'` — Face color
`'interp'` (default) | `'none'` | RGB triplet | character vector of color name

Face color, specified as one of these values:

- `'interp'` — Interpolate the face colors. Coloring is based on `ZData` values.
- `'none'` — Do not draw the faces.
- RGB triplet or character vector of a color name — Use the same color for all of the faces.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

'EdgeColor' — Line color

[0 0 0] (default) | 'interp' | 'none' | RGB triplet or character vector

Line color, specified as one of these values:

- 'interp' — Color the edges based on the ZData property values.
- 'none' — Do not draw the edges.
- RGB triplet or a character vector of a color name — Use the same color for all the edges. The default RGB triplet value of [0 0 0] corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

`'LineStyle'` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

Tips

- Use element-wise operators for the best performance and to avoid a warning message. For example, use `x.*y` instead of `x*y`. For more information, see "Array vs. Matrix Operations".
- When you zoom in on the chart, `fimplicit3` recalculates the data, which can reveal hidden details.

See Also

See Also

Functions
`fcontour` | `fimplicit` | `fplot` | `fplot3` | `fsurf`

Properties
ImplicitFunctionSurface Properties

Introduced in R2016b

find

Find indices and values of nonzero elements

Syntax

```
k = find(X)
k = find(X,n)
k = find(X,n,direction)

[row,col] = find( ___ )
[row,col,v] = find( ___ )
```

Description

`k = find(X)` returns a vector containing the linear indices of each nonzero element in array `X`.

- If `X` is a vector, then `find` returns a vector with the same orientation as `X`.
- If `X` is a multidimensional array, then `find` returns a column vector of the linear indices of the result.
- If `X` contains no nonzero elements or is empty, then `find` returns an empty array.

`k = find(X,n)` returns the first `n` indices corresponding to the nonzero elements in `X`.

`k = find(X,n,direction)`, where `direction` is `'last'`, finds the last `n` indices corresponding to nonzero elements in `X`. The default for `direction` is `'first'`, which finds the first `n` indices corresponding to nonzero elements.

`[row,col] = find( ___ )` returns the row and column subscripts of each nonzero element in array `X` using any of the input arguments in previous syntaxes.

`[row,col,v] = find( ___ )` also returns vector `v`, which contains the nonzero elements of `X`.

Examples

Zero and Nonzero Elements in Matrix

Find the nonzero elements in a 3-by-3 matrix.

```
X = [1 0 2; 0 1 1; 0 0 4]
```

```
X =

     1     0     2
     0     1     1
     0     0     4
```

```
k = find(X)
```

```
k =

     1
     5
     7
     8
     9
```

Use the logical `not` operator on `X` to locate the zeros.

```
k2 = find(~X)
```

```
k2 =

     2
     3
     4
     6
```

Elements Satisfying a Condition

Find the first five elements that are less than 10 in a 4-by-4 magic square matrix.

```
X = magic(4)
```

```
X =
```

```
    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1
```

```
k = find(X<10,5)
```

```
k =

     2
     3
     4
     5
     7
```

View the corresponding elements of X.

```
X(k)
```

```
ans =

     5
     9
     4
     2
     7
```

Elements Equal to Specific Values

To find a specific integer value, use the == operator. For instance, find the element equal to 13 in a 1-by-10 vector of odd integers.

```
x = 1:2:20
```

```
x =

     1     3     5     7     9    11    13    15    17    19
```

```
k = find(x==13)
```

```
k = 7
```

To find a noninteger value, use a tolerance value based on your data. Otherwise, the result is sometimes an empty matrix due to floating-point roundoff error.

```
y = 0:0.1:1
```

```
y =

         0    0.1000    0.2000    0.3000    0.4000    0.5000    0.6000    0.7000    0.8
```

```
k = find(y==0.3)
```

```
k =

  1×0 empty double row vector
```

```
k = find(abs(y-0.3) < 0.001)
```

```
k = 4
```

Last Several Nonzero Elements

Create a 6-by-6 magic square matrix with all of the odd-indexed elements equal to zero.

```
X = magic(6);
X(1:2:end) = 0
```

```
X =

     0     0     0     0     0     0
     3    32     7    21    23    25
     0     0     0     0     0     0
     8    28    33    17    10    15
     0     0     0     0     0     0
     4    36    29    13    18    11
```

Locate the *last* four nonzeros.

```
k = find(X,4,'last')
```

```
k =

    30
```

```
    32
    34
    36
```

Elements Satisfying Multiple Conditions

Find the first three elements in a 4-by-4 matrix that are greater than 0 and less than 10. Specify two outputs to return the row and column subscripts to the elements.

```
X = [18 3 1 11; 8 10 11 3; 9 14 6 1; 4 3 15 21]
```

```
X =

    18     3     1    11
     8    10    11     3
     9    14     6     1
     4     3    15    21
```

```
[row,col] = find(X>0 & X<10,3)
```

```
row =

     2
     3
     4


col =

     1
     1
     1
```

The first instance is `X(2,1)`, which is `8`.

Subscripts and Values for Nonzero Elements

Find the nonzero elements in a 3-by-3 matrix. Specify three outputs to return the row subscripts, column subscripts, and element values.

```
X = [3 2 0; -5 0 7; 0 0 1]
```

```
X =

     3     2     0
    -5     0     7
     0     0     1
```

```
[row,col,v] = find(X)
```

```
row =

     1
     2
     1
     2
     3


col =

     1
     1
     2
     3
     3


v =

     3
    -5
     2
     7
     1
```

Subscripts of Multidimensional Array

Find the nonzero elements in a 4-by-2-by-3 array. Specify two outputs, `row` and `col`, to return the row and column subscripts of the nonzero elements. When the input is a multidimensional array (`N > 2`), `find` returns `col` as a linear index over the `N-1` trailing dimensions of `X`.

```
X = zeros(4,2,3);
```

```
X([1 12 19 21]) = 1

X =

(:,:,1) =

     1     0
     0     0
     0     0
     0     0


(:,:,2) =

     0     0
     0     0
     0     0
     1     0


(:,:,3) =

     0     1
     0     0
     1     0
     0     0


[row,col] = find(X)

row =

     1
     4
     3
     1


col =

     1
     3
     5
     6
```

- "Find Array Elements That Meet a Condition"

Input Arguments

X — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. If X is an empty array or has no nonzero elements, then k is an empty array.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char
Complex Number Support: Yes

n — Number of nonzeros to find

positive integer scalar

Number of nonzeros to find, specified as a positive integer scalar. By default, find(X,n) looks for the first n nonzero elements in X.

direction — Search direction

'first' (default) | 'last'

Search direction, specified as the string 'first' or 'last'. Look for the *last* n nonzero elements in X using find(X,n,'last').

Output Arguments

k — Indices to nonzero elements

vector

Indices to nonzero elements, returned as a vector. If X is a row vector, then k is also a row vector. Otherwise, k is a column vector. k is an empty array when X is an empty array or has no nonzero elements.

You can return the nonzero values in X using X(k).

row — Row subscripts

vector

Row subscripts, returned as a vector. Together, `row` and `col` specify the `X(row,col)` subscripts corresponding to the nonzero elements in `X`.

`col` — Column subscripts
vector

Column subscripts, returned as a vector. Together, `row` and `col` specify the `X(row,col)` subscripts corresponding to the nonzero elements in `X`.

If `X` is a multidimensional array with `N > 2`, then `col` is a linear index over the `N-1` trailing dimensions of `X`. This preserves the relation `X(row(i),col(i)) == v(i)`.

`v` — Nonzero elements of `X`
vector

Nonzero elements of `X`, returned as a vector.

Definitions

Linear Indices

A linear index allows use of a single subscript to index into an array, such as `A(k)`. MATLAB treats the array as a single column vector with each column appended to the bottom of the previous column. Thus, linear indexing numbers the elements in the columns from top to bottom, left to right.

For example, consider a 3-by-3 matrix. You can reference the `A(2,2)` element with `A(5)`, and the `A(2,3)` element with `A(8)`. The linear index changes depending on the size of the array; `A(5)` returns a differently located element for a 3-by-3 matrix than it does for a 4-by-4 matrix.

The `sub2ind` and `ind2sub` functions are useful in converting between subscripts and linear indices.

Tips

- To find array elements that meet a condition, use `find` in conjunction with a relational expression. For example, `find(X<5)` returns the linear indices to the elements in `X` that are less than `5`.

- To directly find the elements in `X` that satisfy the condition `X<5`, use `X(X<5)`. Avoid function calls like `X(find(X<5))`, which unnecessarily use `find` on a logical matrix.
- When you execute `find` with a relational operation like `X>1`, it is important to remember that the result of the relational operation is a logical matrix of ones and zeros. For example, the command `[row,col,v] = find(X>1)` returns a column vector of logical `1` (`true`) values for `v`.
- The row and column subscripts, `row` and `col`, are related to the linear indices in `k` by `k = sub2ind(size(X),row,col)`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If a variable-size input becomes a row vector at run time, then code generation ends with an error. This limitation does not apply when the input is scalar or is a variable-length row vector.
- For variable-size inputs, the shape of empty outputs (0-by-0, 0-by-1, or 1-by-0) depends on the upper bounds of the size of the input. When the input array is a scalar or [] at run time, the output might not match MATLAB. If the input is a variable-length row vector, then the size of an empty output is 1-by-0. Otherwise, the size is 0-by-1.
- The generated code always returns a variable-length vector. Even when you provide the output vector `k`, the output is not fixed-size because the output can contain fewer than `k` elements. For example, `find(x,1)` returns a variable-length vector with one or zero elements.

See Also

See Also

`ind2sub` | `ismember` | `Logical Operators: Short-Circuit` | `nonzeros` | `strfind` | `sub2ind`

Topics

"Find Array Elements That Meet a Condition"
"Matrix Indexing"
"Relational Operations"
"Sparse Matrices"

Introduced before R2006a

findall

Find all graphics objects

Syntax

```
object_handles = findall(handle_list)
object_handles = findall(handle_list,'property','value',...)
```

Description

`object_handles = findall(handle_list)` returns the handles, including hidden handles, of all objects in the hierarchy under the objects identified in `handle_list`.

`object_handles = findall(handle_list,'property','value',...)` returns the handles of all objects in the hierarchy under the objects identified in `handle_list` that have the specified properties set to the specified values.

Examples

Find Object with Hidden Handle

Use `findall` to find the text object for the *x*-axis label. Unlike `findobj`, the `findall` function finds objects even if the `HandleVisibility` property is set to `'off'`.

```
plot(1:10)
txt = xlabel('My x-axis label');
```

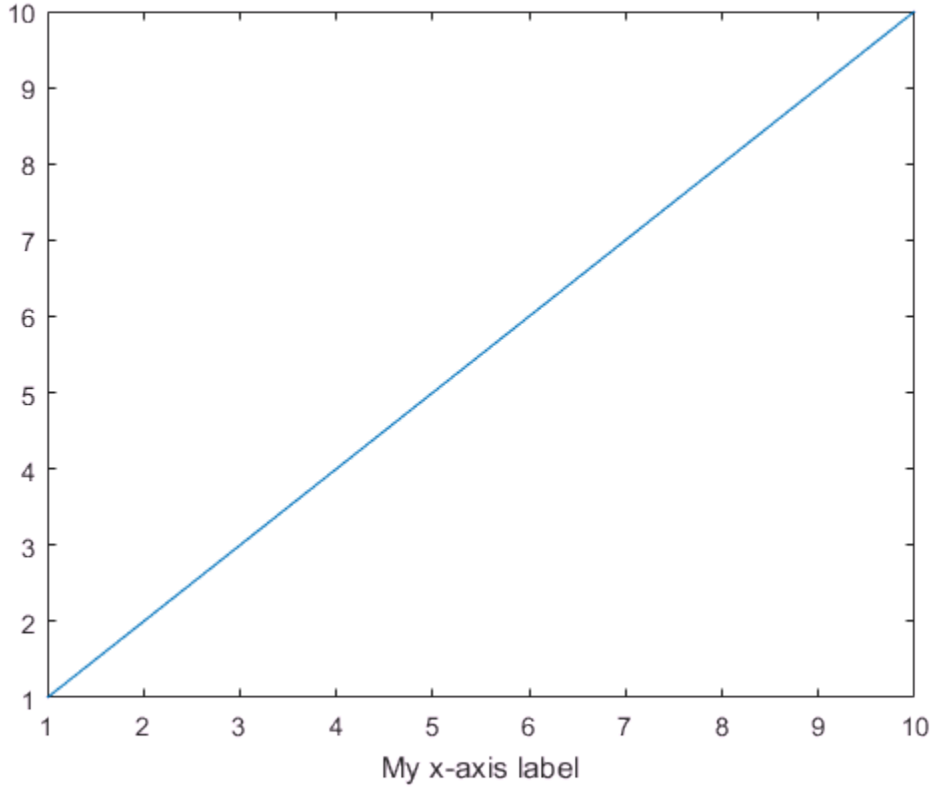


```
txt.HandleVisibility
```

```
ans =
'off'
```

```
a = findall(gcf,'Type','text')
```

```
a =
  3×1 Text array:

  Text    (My x-axis label)
  Text
  Text
```

```
d = findobj(gcf,'Type','text')
```

```
d =

  0×0 empty GraphicsPlaceholder array.
```

Tips

`findall` is similar to `findobj`, except that it finds objects even if their `HandleVisibility` is set to `off`.

See Also

`allchild` | `findobj`

Introduced before R2006a

findfigs

Find visible offscreen figures

Syntax

```
findfigs
```

Description

`findfigs` finds all visible figure windows whose display area is off the screen and positions them on the screen.

A window appears to the MATLAB software to be offscreen when its display area (the area not covered by the window's title bar, menu bar, and toolbar) does not appear on the screen.

This function is useful when you are bringing an application from a larger monitor to a smaller one (or one with lower resolution). Windows visible on the larger monitor may appear offscreen on a smaller monitor. Using `findfigs` ensures that all windows appear on the screen.

See Also

Introduced before R2006a

findgroups

Find groups and return group numbers

Syntax

```
G = findgroups(A)
G = findgroups(A1,...,AN)
```

```
[G,ID] = findgroups(A)
[G,ID1,...,IDN] = findgroups(A1,...,AN)
```

```
G = findgroups(T)
[G,TID] = findgroups(T)
```

Description

`G = findgroups(A)` returns `G`, a vector of group numbers created from the grouping variable `A`. The output argument `G` contains integer values from 1 to `N`, indicating `N` distinct groups for the `N` unique values in `A`. For example, if `A` is `{'b','a','a','b'}`, then `findgroups` returns `G` as `[2 1 1 2]`. You can use `G` to split groups of data out of other variables. Use `G` as an input argument to `splitapply` in the "Split-Apply-Combine Workflow" on page 1-3359.

`findgroups` treats empty character vectors and `NaN`, `NaT`, and undefined categorical values in `A` as missing values and returns `NaN` as the corresponding elements of `G`.

`G = findgroups(A1,...,AN)` creates group numbers from `A1,...,AN`. The `findgroups` function defines groups as the unique combinations of values across `A1,...,AN`. For example, if `A1` is `{'a','a','b','b'}` and `A2` is `[0 1 0 0]`, then `findgroups(A1,A2)` returns `G` as `[1 2 3 3]`, because the combination `'b' 0` occurs twice.

`[G,ID] = findgroups(A)` also returns the unique values for each group in `ID`. For example, if `A` is `{'b','a','a','b'}`, then `findgroups` returns `G` as `[2 1 1 2]` and `ID` as `{'a','b'}`. The arguments `A` and `ID` are the same data type, but need not be the same size.

`[G,ID1,...,IDN] = findgroups(A1,...,AN)` also returns the unique values for each group across `ID1,...,IDN`. The values across `ID1,...,IDN` define the groups. For example, if `A1` is `{'a','a','b','b'}` and `A2` is `[0 1 0 0]`, then `findgroups(A1,A2)` returns `G` as `[1 2 3 3]`, and `ID1` and `ID2` as `{'a','a','b'}` and `[0 1 0]`.

`G = findgroups(T)` returns `G`, a vector of group numbers created from the variables in table `T`. The `findgroups` function treats all the variables in `T` as grouping variables.

`[G,TID] = findgroups(T)` also returns `TID`, a table that contains the unique values for each group. `TID` contains the unique combinations of values across the variables of `T`. The variables in `T` and `TID` have the same names, but the tables need not have the same number of rows.

Examples

Use Group Numbers to Split Data

Use group numbers to split patient height measurements into groups by gender. Then calculate the mean height for each group.

Load patient heights and genders from the data file `patients.mat`.

```
load patients
whos Gender Height
```

```
  Name          Size            Bytes  Class     Attributes

  Gender      100x1             12212  cell
  Height      100x1               800  double
```

Specify groups by gender with `findgroups`.

```
G = findgroups(Gender);
```

Compare the first five elements of `Gender` and `G`. Where `Gender` contains `'Female'`, `G` contains `1`. Where `Gender` contains `'Male'`, `G` contains `2`.

```
Gender(1:5)
```

```
ans = 5×1 cell array
    'Male'
```

```
    'Male'
    'Female'
    'Female'
    'Female'
```

```
G(1:5)
```

```
ans =

     2
     2
     1
     1
     1
```

Split the `Height` variable into two groups of heights using `G`. Apply the `mean` function. The groups contain the mean heights of female and male patients, respectively.

```
splitapply(@mean,Height,G)
```

```
ans =

   65.1509
   69.2340
```

Use Two Grouping Variables to Split Data

Calculate mean blood pressures for groups of patients from measurements grouped by gender and status as a smoker.

Load blood pressure readings, gender, and smoking data for patients from the data file `patients.mat`.

```
load patients
whos Systolic Diastolic Gender Smoker
```

```
  Name             Size            Bytes  Class      Attributes

  Diastolic      100x1               800  double
  Gender         100x1             12212  cell
  Smoker         100x1               100  logical
  Systolic       100x1               800  double
```

Specify groups using gender and smoking information about the patients. `G` contains integers from one to four because there are four possible combinations of values from `Smoker` and `Gender`.

```
G = findgroups(Smoker,Gender);
G(1:10)
```

```
ans =

     4
     2
     1
     1
     1
     1
     3
     2
     2
     1
```

Calculate the mean blood pressure for each group.

```
meanSystolic = splitapply(@mean,Systolic,G);
meanDiastolic = splitapply(@mean,Diastolic,G);
mBP = [meanSystolic,meanDiastolic]
```

```
mBP =

  119.4250   79.0500
  119.3462   79.8846
  129.0000   89.2308
  129.5714   90.3333
```

Use Unique Group Values in Output Table

Calculate the median heights for groups of patients, and display the results in a table. To define the groups of patients, use the additional output argument from `findgroups`.

Load patient heights and genders from the data file `patients.mat`.

```
load patients
whos Gender Height
```

```
  Name          Size            Bytes  Class     Attributes

  Gender      100x1             12212  cell
  Height      100x1               800  double
```

Specify groups by gender with `findgroups`. The values in the output argument `gender` define the groups that `findgroups` finds in the grouping variable.

```
[G,gender] = findgroups(Gender);
```

Calculate the median heights. Create a table that contains the median heights.

```
medianHeight = splitapply(@median,Height,G);
T = table(gender,medianHeight)
```

```
T = 2×2 table
     gender     medianHeight
    ________    ____________

    'Female'    65
    'Male'      69
```

Use Unique Values from Two Grouping Variables

Calculate mean blood pressures for groups of patients, and display the results in a table. To define the groups of patients, use the additional output arguments from `findgroups`.

Load blood pressure readings, gender, and smoking data for 100 patients from the data file `patients.mat`.

```
load patients
whos Systolic Diastolic Gender Smoker
```

```
  Name             Size            Bytes  Class      Attributes

  Diastolic      100x1               800  double
  Gender         100x1             12212  cell
  Smoker         100x1               100  logical
  Systolic       100x1               800  double
```

Specify groups using gender and smoking information about the patients. Calculate mean blood pressure for each group. The values across the output arguments `gender` and `smoker` define the groups that `findgroups` finds in the grouping variables.

```
[G,gender,smoker] = findgroups(Gender,Smoker);
```

```
meanSystolic = splitapply(@mean,Systolic,G);
meanDiastolic = splitapply(@mean,Diastolic,G);
```

Create a table with the mean blood pressure for each group of patients.

```
T = table(gender,smoker,meanSystolic,meanDiastolic)
```

```
T = 4×4 table
     gender     smoker    meanSystolic    meanDiastolic
    ________    ______    ____________    _____________

    'Female'    false     119.43           79.05
    'Female'    true         129          89.231
    'Male'      false     119.35          79.885
    'Male'      true      129.57          90.333
```

Group by Table Variables

Calculate mean blood pressures for patients using grouping variables that are in a table.

Load gender and smoking data for 100 patients into a table.

```
load patients
T = table(Gender,Smoker);
T(1:5,:)
```

```
ans = 5×2 table
     Gender     Smoker
    ________    ______

    'Male'      true
    'Male'      false
    'Female'    false
    'Female'    false
    'Female'    false
```

Specify groups of patients using the `Gender` and `Smoker` variables in `T`.

```
G = findgroups(T);
```

Calculate mean blood pressures from the data variables `Systolic` and `Diastolic`.

```
meanSystolic = splitapply(@mean,Systolic,G);
meanDiastolic = splitapply(@mean,Diastolic,G);
```

```
mBP = [meanSystolic,meanDiastolic]
```

```
mBP =

  119.4250   79.0500
  129.0000   89.2308
  119.3462   79.8846
  129.5714   90.3333
```

Group from Table and Create Output Table

Create a table of mean blood pressures for patients grouped by gender and status as a smoker or nonsmoker.

Load gender and smoking data for patients into a table.

```
load patients
T = table(Gender,Smoker);
```

Specify groups of patients using the `Gender` and `Smoker` variables in `T`. The output table `TID` identifies the groups.

```
[G,TID] = findgroups(T);
TID
```

```
TID = 4×2 table
     Gender     Smoker
    ________    ______

    'Female'    false
    'Female'    true
    'Male'      false
    'Male'      true
```

Calculate mean blood pressures from the data variables `Systolic` and `Diastolic`. Append mean blood pressures to `TID`.

```
TID.meanSystolic = splitapply(@mean,Systolic,G);
TID.meanDiastolic = splitapply(@mean,Diastolic,G)
```

```
TID = 4×4 table
     Gender     Smoker    meanSystolic    meanDiastolic
    ________    ______    ____________    _____________
```

```
    'Female'    false     119.43          79.05
    'Female'    true         129         89.231
    'Male'      false     119.35         79.885
    'Male'      true      129.57         90.333
```

- "Split Table Data Variables and Apply Functions"
- "Split Data into Groups and Calculate Statistics"
- "Calculations on Tables"

Input Arguments

A — Grouping variable

vector | cell array of character vectors

Grouping variable, specified as a vector or a cell array of character vectors. The unique values in A identify groups.

If A is a vector, it can be numeric or of data type `categorical`, `datetime`, `duration`, or `logical`.

T — Grouping variables

table

Grouping variables, specified as a table. `findgroups` treats each table variable as a separate grouping variable.

Output Arguments

G — Group numbers

vector of positive integers

Group numbers, returned as a vector of positive integers. For N groups identified in the grouping variables, every integer between 1 and N specifies a group. G contains NaN where any grouping variable contains an empty character vector or a NaN, NaT, or undefined categorical value.

- If the grouping variables are vectors, then G and the grouping variables all are the same size.

- If the grouping variables are in a table, the length of `G` is equal to the number of rows of the table.

`ID` — Unique values that identify each group
vector of unique values | cell array of character vectors

The unique values that identify each group, returned as a vector or cell array of character vectors. `ID` is of the same data type as `A`, but need not be the same size.

`TID` — Table of unique values that identify each group
table

The unique values that identify each group, returned as a table. The variables in `TID` and `T` have the same names. However, `TID` and `T` need not have the same numbers of rows.

Definitions

Split-Apply-Combine Workflow

The *Split-Apply-Combine* workflow is common in data analysis. In this workflow, the analyst splits the data into groups, applies a function to each group, and combines the results. The diagram shows a typical example of the workflow and the parts of the workflow implemented by `findgroups` and `splitapply`.

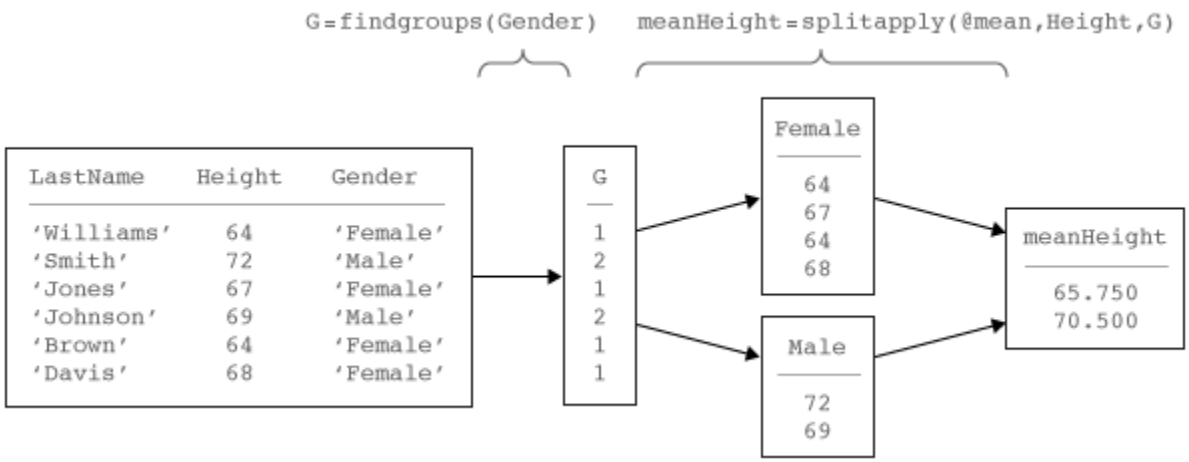

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- Use only the syntaxes `G = findgroups(A)` or `G = findgroups(A1,A2,...)` with tall array `A`. Multiple output arguments are not supported, and `A` cannot be a tall table.
- The order of the group numbers in `G` might be different compared to in-memory `findgroups` calculations.

For more information, see "Tall Arrays".

See Also

See Also

`arrayfun` | `ismember` | `rowfun` | `splitapply` | `unique` | `varfun`

Topics

"Split Table Data Variables and Apply Functions"
"Split Data into Groups and Calculate Statistics"
"Calculations on Tables"
"Grouping Variables To Split Data"

Introduced in R2015b

findobj

Locate graphics objects with specific properties

Syntax

```
findobj
h = findobj
h = findobj('PropertyName',PropertyValue,...)
h = findobj('PropertyName',PropertyValue,'-logicaloperator',
PropertyName',PropertyValue,...)
h = findobj('-regexp','PropertyName','regexp',...)
h = findobj('-property','PropertyName')
h = findobj(objhandles,...)
h = findobj(objhandles,'-depth',d,...)
h = findobj(objhandles,'flat','PropertyName',PropertyValue,...)
```

Description

`findobj` returns handles of the root object and all its descendants without assigning the result to a variable.

`h = findobj` returns handles of the root object and all its descendants.

`h = findobj('PropertyName',PropertyValue,...)` returns handles of all graphics objects having the property *`PropertyName`*, set to the value `PropertyValue`. You can specify more than one property/value pair, in which case, `findobj` returns only those objects having all specified values.

`h = findobj('PropertyName',PropertyValue,'-logicaloperator',PropertyName',PropertyValue,...)` applies the logical operator to the property value matching. Possible values for *`-logicaloperator`* are:

- `-and`
- `-or`
- `-xor`

- `-not`

For more information on logical operators, see "Logical Operations".

`h = findobj('-regexp','PropertyName','regexp',...)` matches objects using regular expressions as if the value of you passed the property `PropertyName` to the `regexp` function as

`regexp(PropertyValue,'regexp')`
If a match occurs, `findobj` returns the object handle. See the `regexp` function for information on how the MATLAB software uses regular expressions.

`h = findobj('-property','PropertyName')` finds all objects having the specified property.

`h = findobj(objhandles,...)` restricts the search to objects listed in `objhandles` and their descendants.

`h = findobj(objhandles,'-depth',d,...)` specifies the depth of the search. The depth argument `d` controls how many levels under the handles in `objhandles` MATLAB traverses. Specify `d` as `inf` to get the default behavior of all levels. Specify `d` as `0` to get the same behavior as using the `flat` argument.

`h = findobj(objhandles,'flat','PropertyName',PropertyValue,...)` restricts the search to those objects listed in `objhandles` and does not search descendants.

`findobj` returns an error if a handle refers to a nonexistent graphics object.

`findobj` correctly matches any legal property value. For example,

`findobj('Color','r')`
finds all objects having a `Color` property set to `red`, `r`, or `[1 0 0]`.

When a graphics object is a descendant of more than one object identified in `objhandles`, MATLAB searches the object each time `findobj` encounters its handle. Therefore, implicit references to a graphics object can result in multiple returns of its handle.

Note: `findobj` does not return graphics objects that have the `HandleVisibility` property set to `'off'`. For more information, see the HandleVisibility property description.

To find handle objects that meet specified conditions, use `findobj`.

Examples

Find all line objects in the current axes:

```
h = findobj(gca,'Type','line')
```

Find all objects having a `Label` set to `'foo'` and a `String` property set to `'bar'`:

```
h = findobj('Label','foo','-and','String','bar');
```

Find all objects whose `String` property is not `'foo'` and is not `'bar'`:

```
h = findobj('-not','String','foo','-not','String','bar');
```

Find all objects having a `String` property set to `'foo'` and a `Tag` property set to `'button one'` and whose `Color` property is not `'red'` or `'blue'`:

```
h = findobj('String','foo','-and','Tag','button one',...
 '-and','-not',{'Color','red','-or','Color','blue'})
```

Find all objects for which you have assigned a value to the `Tag` property (that is, the value is not the empty character vector `''`):

```
h = findobj('-regexp','Tag','[^'']')
```

Find all children of the current figure that have their `BackgroundColor` property set to a certain shade of gray (`[.7 .7 .7]`). This statement also searches the current figure for the matching property value pair.

```
h = findobj(gcf,'-depth',1,'BackgroundColor',[.7 .7 .7])
```

Tutorials

- "Find Objects"

See Also

`copyobj` | `findall` | `findobj` | `gcf` | `gca` | `gcbo` | `gco` | `get` | `regexp` | `set`

Topics

"Find Objects"

Introduced before R2006a

findstr

Find string within another, longer string

Note: `findstr` is not recommended. Use `strfind` instead.

Syntax

```
k = findstr(str1, str2)
```

Description

`k = findstr(str1, str2)` searches the longer of the two input strings for any occurrences of the shorter string, returning the starting index of each such occurrence in the double array `k`. If no occurrences are found, then `findstr` returns the empty array, `[]`.

The search performed by `findstr` is case sensitive. Any leading and trailing blanks in either input string are explicitly included in the comparison.

Unlike the `strfind` function, the order of the input arguments to `findstr` is not important. This can be useful if you are not certain which of the two input strings is the longer one.

Examples

```
s = 'Find the starting indices of the shorter string.';

findstr(s, 'the')
ans =
     6    30

findstr('the', s)
ans =
```

6 30

See Also

strfind | strtok | strcmp | strncmp | strcmpi | strncmpi | regexp | regexpi | regexprep

Introduced before R2006a

finish

Termination file for MATLAB program

Description

When the MATLAB program quits, it runs a script called `finish.m`, if the script exists and is on the search path MATLAB uses or in the current folder. `finish.m` is a file you create that instructs MATLAB to perform any final tasks before terminating. For example, you can save the data in your workspace to a MAT-file.

`finish.m` is invoked whenever you do one of the following:

- Click the Close box ☒ in the MATLAB desktop on Microsoft Windows platforms or the equivalent on UNIX platforms
- Type `quit` or `exit` at the command prompt

Examples

Two sample termination files are provided with MATLAB in *`matlabroot`*`/toolbox/local`.

- `finishsav.m` — Saves the workspace to a MAT-file when MATLAB quits.
- `finishdlg.m` — Displays a dialog box allowing you to cancel quitting and saves the workspace. See also the "Confirmation Dialog Boxes Preferences" and the option for exiting MATLAB.

To create a termination file, make a copy of one of these sample files and change the name to `finish.m`. Make sure that the file is on the MATLAB path. You can modify the file to include any operations you want the termination file to perform.

Tips

When using graphics features in `finish.m`, use `uiwait`, `waitfor`, or `drawnow` so that figures are visible.

See Also

`quit` | `exit` | `startup`

Topics

"Exit MATLAB"

Introduced before R2006a

fitsdisp

Display FITS metadata

Syntax

```
fitsdisp(filename)
fitsdisp(filename,Name,Value)
```

Description

`fitsdisp(filename)` displays metadata for all the Header/Data Units (HDUs) found in the FITS file specified by `filename`.

`fitsdisp(filename,Name,Value)` displays metadata for all the Header/Data Units (HDUs) found in the FITS file with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`filename`

Name of an existing FITS file specified as a character vector.

Default:

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'Index'`

Positive scalar value or vector specifying the HDUs.

Default:

`'Mode'`

Specified as one of the following:

- `'standard'` – Display standard keywords
- `'min'` – Display only HDU types and sizes
- `'full'` – Display all HDU keywords

Default: `'standard'`

Examples

Display metadata in the 2nd HDU in the FITS file.

```
fitsdisp('tst0012.fits','Index',2);
```

Display the metadata in the 1st, 3rd, and 5th HDUs in a file.

```
fitsdisp('tst0012.fits','Index',[1 3 5]);
```

Display all metadata in the 5th HDU in a file

```
fitsdisp('tst0012.fits','Index',5,'Mode','full');
```

References

For copyright information, see the `cfitsiocopyright.txt` file.

See Also

`fitsread` | `fitswrite` | `fitsinfo`

Introduced in R2012a

fitsinfo

Information about FITS file

Syntax

```
info = fitsinfo(filename)
```

Description

`info = fitsinfo(filename)` returns the structure, `info`, with fields that contain information about the contents of a Flexible Image Transport System (FITS) file. `filename` is a character vector that specifies the name of the FITS file.

The `info` structure contains the following fields, listed in the order they appear in the structure. In addition, the info structure can also contain information about any number of optional file components, called *extensions* in FITS terminology. For more information, see "FITS File Extensions" on page 1-3372.

Field Name	Description	Return Type
`Filename`	Name of the file	Character vector
`FileModDate`	File modification date	Character vector
`FileSize`	Size of the file in bytes	`double`
`Contents`	List of extensions in the file in the order that they occur	Cell array of character vectors
`PrimaryData`	Information about the primary data in the FITS file	Structure array

PrimaryData

The `PrimaryData` field is a structure that describes the primary data in the file. The following table lists the fields in the order they appear in the structure.

Field Name	Description	Return Type
`DataType`	Precision of the data	Character vector

Field Name	Description	Return Type
`Size`	Size of each dimension. The number of rows correspond to the value of the NAXIS2 keyword, while the number of columns correspond to the value of the NAXIS1 keyword. Any further dimensions correspond to NAXIS3, NAXIS4, and so on.	`double` array
`DataSize`	Size of the primary data in bytes	`double`
`MissingDataValue`	Value used to represent undefined data	`double`
`Intercept`	Value, used with `Slope`, to calculate actual pixel values from the array pixel values, using the equation: `actual_value = Slope*array_value + Intercept`	`double`
`Slope`	Value, used with `Intercept`, to calculate actual pixel values from the array pixel values, using the equation: `actual_value = Slope*array_value + Intercept`	`double`
`Offset`	Number of bytes from beginning of the file to the location of the first data value	`double`
`Keywords`	A number-of-keywords-by-3 cell array containing keywords, values, and comments of the header in each column	Cell array of character vectors

FITS File Extensions

A FITS file can also include optional extensions. If the file contains any of these extensions, the `info` structure can contain these additional fields.

- AsciiTable — Numeric information in tabular format, stored as ASCII characters
- BinaryTable — Numeric information in tabular format, stored in binary representation
- Image — A multidimensional array of pixels

- Unknown — Nonstandard extension

AsciiTable Extension

The `AsciiTable` structure contains the following fields, listed in the order they appear in the structure.

Field Name	Description	Return Type
`Rows`	Number of rows in the table	`double`
`RowSize`	Number of characters in each row	`double`
`NFields`	Number of fields in each row	`double` array
`FieldFormat`	A 1-by-`NFields` cell containing formats in which each field is encoded. The formats are FORTRAN-77 format codes.	Cell array of character vectors
`FieldPrecision`	A 1-by-`NFields` cell containing precision of the data in each field	Cell array of character vectors
`FieldWidth`	A 1-by-`NFields` array containing the number of characters in each field	`double` array
`FieldPos`	A 1-by-`NFields` array of numbers representing the starting column for each field	`double` array
`DataSize`	Size of the data in the table in bytes	`double`
`MissingDataValue`	A 1-by-`NFields` array of numbers used to represent undefined data in each field	Cell array of character vectors
`Intercept`	A 1-by-`NFields` array of numbers used along with `Slope` to calculate actual data values from the array data values using the equation: `actual_value = Slope*array_value+Intercept`	`double` array
`Slope`	A 1-by-`NFields` array of numbers used with `Intercept` to calculate true data values from the array data values using the equation: `actual_value = Slope*array_value+Intercept`	`double` array

Field Name	Description	Return Type
`Offset`	Number of bytes from beginning of the file to the location of the first data value in the table	`double`
`Keywords`	A number-of-keywords-by-3 cell array containing all the Keywords, Values and Comments in the ASCII table header	Cell array of character vectors

BinaryTable Extension

The `BinaryTable` structure contains the following fields, listed in the order they appear in the structure.

Field Name	Description	Return Type
`Rows`	Number of rows in the table	`double`
`RowSize`	Number of bytes in each row	`double`
`NFields`	Number of fields in each row	`double`
`FieldFormat`	A 1-by-`NFields` cell array containing the data type of the data in each field. The data type is represented by a FITS binary table format code.	Cell array of character vectors
`FieldPrecision`	A 1-by-`NFields` cell containing precision of the data in each field	Cell array of character vectors
`FieldSize`	A 1-by-`NFields` array, where each element contains the number of values in the Nth field	`double` array
`DataSize`	Size of the data in the Binary Table, in bytes. Includes any data past the main table.	`double`
`MissingDataValue`	An 1-by-`NFields` array of numbers used to represent undefined data in each field	Cell array of `double`
`Intercept`	A 1-by-`NFields` array of numbers used along with Slope to calculate actual data values from the array data values	`double` array

Field Name	Description	Return Type
	using the equation: `actual_value = slope*array_value+Intercept`	
`Slope`	A 1-by-`NFields` array of numbers used with Intercept to calculate true data values from the array data values using the equation: `actual_value = Slope*array_value+Intercept`	`double` array
`Offset`	Number of bytes from beginning of the file to the location of the first data value	`double`
`ExtensionSize`	Size of any data past the main table, in bytes	`double`
`ExtensionOffset`	Number of bytes from the beginning of the file to any data past the main table	`double`
`Keywords`	A number-of-keywords-by-3 cell array containing all the Keywords, values, and comments in the Binary Table header	Cell array of character vectors

Image Extension

The `Image` structure contains the following fields, listed in the order they appear in the structure.

Field Name	Description	Return Type
`DataType`	Precision of the data	Character vector
`Size`	Size of each dimension. The number of rows correspond to the value of the NAXIS2 keyword, while the number of columns correspond to the value of the NAXIS1 keyword. Any further dimensions correspond to NAXIS3, NAXIS4, and so on.	`double` array
`DataSize`	Size of the data in the Image extension in bytes	`double`
`Offset`	Number of bytes from the beginning of the file to the first data value	`double`

Field Name	Description	Return Type
`MissingDataValue`	Value used to represent undefined data	`double`
`Intercept`	Value, used with `Slope`, to calculate actual pixel values from the array pixel values, using the equation: `actual_value = Slope*array_value+Intercept`	`double`
`Slope`	Value, used with `Intercept`, to calculate actual pixel values from the array pixel values, using the equation: `actual_value = Slope*array_value + Intercept`	`double`
`Keywords`	A number-of-keywords-by-3 cell array containing all the Keywords, values, and comments in the Binary Table header	Cell array of character vectors

Unknown Structure

The `Unknown` structure contains the following fields, listed in the order they appear in the structure.

Field Name	Description	Return Type
`DataType`	Precision of the data	Character vector
`Size`	Sizes of each dimension	`double` array
`DataSize`	Size of the data in nonstandard extensions, in bytes	`double`
`Offset`	Number of bytes from beginning of the file to the first data value	`double`
`MissingDataValue`	Representation of undefined data	`double`
`Intercept`	Value, used with `Slope`, to calculate actual data values from the array data values, using the equation: `actual_value = Slope*array_value+Intercept`	`double`

Field Name	Description	Return Type
`Slope`	Value, used with `Intercept`, to calculate actual data values from the array data values, using the equation: `actual_value = Slope*array_value+Intercept`	`double`
`Keywords`	A number-of-keywords-by-3 cell array containing all the Keywords, values, and comments in the Binary Table header	Cell array of character vectors

Examples

Get Information About FITS File

Use `fitsinfo` to obtain information about the FITS file `tst0012.fits`. The returned structure contains `Filename`, `FileModDate`, `FileSize`, `Contents`, and `PrimaryData`. In addition to its primary data, the file also contains an example of the extensions `BinaryTable`, `Unknown`, `Image`, and `AsciiTable`.

```
S = fitsinfo('tst0012.fits');
```

View the `PrimaryData` field.

```
S.PrimaryData
```

```
ans = struct with fields:
            DataType: 'single'
                Size: [109 102]
            DataSize: 44472
    MissingDataValue: []
           Intercept: 0
               Slope: 1
              Offset: 2880
            Keywords: {25×3 cell}
```

The `PrimaryData` field describes the data in the file. For example, the `Size` field indicates the data is a 109-by-102 matrix.

View the `AsciiTable` field.

```
S.AsciiTable
```

```
ans = struct with fields:
                Rows: 53
             RowSize: 59
             NFields: 8
         FieldFormat: {'A9'  'F6.2'  'I3'  'E10.4'  'D20.15'  'A5'  'A1'  'I4'}
      FieldPrecision: {'Char'  'Single'  'Integer'  'Single'  'Double'  'Char'  'Char'
          FieldWidth: [9 6.2000 3 10.4000 20.1500 5 1 4]
            FieldPos: [1 11 18 22 33 54 54 55]
            DataSize: 3127
    MissingDataValue: {'*'  '---.--'  '  *'  []  '*'  '*'  '*'  ''}
           Intercept: [0 0 -70.2000 0 0 0 0 0]
               Slope: [1 1 2.1000 1 1 1 1 1]
              Offset: 103680
            Keywords: {65×3 cell}
```

The `AsciiTable` field describes the `AsciiTable` extension. For example, using the `FieldWidth` and `FieldPos` fields you can determine the length and location of each field within a row.

See Also

`fitsread` | `fitswrite` | `fitsdisp`

Introduced before R2006a

fitsread

Read data from FITS file

Syntax

```
data = fitsread(filename)
data = fitsread(filename,extname)
data = fitsread(filename,extname,index)
data = fitsread(filename,Name,Value)
```

Description

`data = fitsread(filename)` reads the primary data of the Flexible Image Transport System (FITS) file. `filename` is specified as a character vector. The function replaces undefined data values with `NaN` and scales numeric data by the slope and intercept values, always returning double precision values.

`data = fitsread(filename,extname)` reads data from the FITS file extension specified by `extname`.

`data = fitsread(filename,extname,index)` reads data from the FITS file extension specified by `extname` . If there is more than one of the specified extensions in the file, `index` specifies the one to read.

`data = fitsread(filename,Name,Value)` reads data from the FITS file with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`filename`

Character vector specifying the name of a FITS file.

Default:

extname

The name of a data array or extension in the FITS file, specified as one of the character vectors in the table that follows. To determine the contents of a FITS, view the `Contents` field of the structure returned by `fitsinfo`.

Data Arrays or Extensions

Extname	Description
`'primary'`	Read data from the primary data array.
`'asciitable'`	Read data from the ASCII Table extension. The return value, `data`, is a 1-D cell array.
`'binarytable'`	Read data from the Binary Table extension. The return value, `data`, is a 1-D cell array.
`'image'`	Read data from the Image extension.
`'unknown'`	Read data from the Unknown extension.

Default:

index

Numeric value specifying which extension to read, if more than one exists in the file.

Default:

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

'info'

`info` structure returned by `fitsinfo` specifying the location of data to read.

Note: Using the `info` structure returned by `fitsinfo` to specify the location of data in a FITS file can significantly improve performance, especially when reading multiple images from the file.

Default:

`'PixelRegion'`

Cell array `{rows,cols,...}` specifying the boundaries of a subimage region to read from the file. Each dimension (`rows`, `cols`) is a vector of 1-based indices given either as `START`, `[START STOP]`, or `[START INCREMENT STOP]`. This parameter is valid only for primary or image extensions.

Default:

`'raw'`

Specifies that `fitsread` should not scale the data read from the file or replace undefined values with `NaN`. Data read from the file is the same class as it is stored in the file.

Default:

`'TableColumns'`

Vector of 1-based indices specifying the columns to read from the ASCII or Binary table extension. This vector should contain unique and valid indices into the table data specified in increasing order. This parameter is valid only for ASCII or Binary extensions.

Default:

`'TableRows'`

Vector of 1-based indices specifying the rows to read from the ASCII or Binary table extension. This vector should contain unique and valid indices into the table data specified in increasing order. This parameter is valid only for ASCII or Binary extensions.

Default:

Output Arguments

`data`

Data returned from the FITS file.

Examples

Read primary data from FITS file

```
data = fitsread('tst0012.fits');

Name        Size             Bytes  Class     Attributes

data      109x102            88944  double
```

Inspect available extensions, read 'image' extension using the `extname` option.

```
info = fitsinfo('tst0012.fits');
 % List of contents, includes any extensions if present.
 disp(info.Contents);
 imageData = fitsread('tst0012.fits','image');
```

Subsample the fifth plane of 'image' extension by 2.

```
info        = fitsinfo('tst0012.fits');
 rowend      = info.Image.Size(1);
 colend      = info.Image.Size(2);
 primaryData = fitsread('tst0012.fits','image',...
               'Info', info,...
               'PixelRegion',{[1 2 rowend], [1 2 colend], 5 });
```

Read every other row from an ASCII table.

```
info      = fitsinfo('tst0012.fits');
rowend    = info.AsciiTable.Rows;
tableData = fitsread('tst0012.fits','asciitable',...
                    'Info',info,...
                    'TableRows',[1:2:rowend]);
```

Read all data for the first, second and fifth columns of the Binary table.

```
info      = fitsinfo('tst0012.fits');
rowend    = info.BinaryTable.Rows;
tableData = fitsread('tst0012.fits','binarytable',...
                    'Info',info,...
                    'TableColumns',[1 2 5]);
```

Tutorials

- "Importing Flexible Image Transport System (FITS) Files"

Definitions

extension

A FITS file contains primary data and can optionally contain any number of optional components, called *extensions* in FITS terminology.

See Also

`fitswrite` | `fitsinfo` | `fitsdisp`

Topics

"Importing Flexible Image Transport System (FITS) Files"

Introduced before R2006a

fitswrite

Write image to FITS file

Syntax

```
fitswrite(imagedata,filename)
fitswrite(imagedata,filename,Name,Value)
```

Description

`fitswrite(imagedata,filename)` writes `imagedata` to the FITS file specified by `filename`. If `filename` does not exist, `fitswrite` creates the file as a simple FITS file. If `filename` exists, `fitswrite` overwrites the file or appends the image to the end of the file, depending on the value of the `writemode` argument.

`fitswrite(imagedata,filename,Name,Value)` writes `imagedata` to the FITS file specified by `filename` with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`imagedata`

Image array.

Default:

`filename`

Character vector specifying the name of an existing FITS file or the name you want to assign to a new FITS file.

Default:

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'WriteMode'`

Specified as one of the following:

- `'overwrite'`
- `'append'`

Default: `overwrite`

`'Compression'`

Specified as one of the following:

- `'none'`
- `'gzip'`
- `'rice'`
- `'hcompress'`
- `'plio'`

Default: `'none'`

Examples

Create a FITS file containing the red channel of an RGB image.

```
X = imread('ngc6543a.jpg');
R = X(:,:,1);
fitswrite(R,'myfile.fits');
fitsdisp('myfile.fits');
```

Create a FITS file with three images constructed from the channels of an RGB image.

```
X = imread('ngc6543a.jpg');
```

```
R = X(:,:,1);  G = X(:,:,2);  B = X(:,:,3);
fitswrite(R,'myfile.fits');
fitswrite(G,'myfile.fits','writemode','append');
fitswrite(B,'myfile.fits','writemode','append');
fitsdisp('myfile.fits');
```

References

For copyright information, see the `cfitsiocopyright.txt` file.

See Also

See Also

`fitsinfo` | `fitsread`

Introduced in R2012a

fix

Round toward zero

Syntax

```
Y = fix(X)
```

Description

`Y = fix(X)` rounds each element of `X` to the nearest integer toward zero. For positive `X`, the behavior of `fix` is the same as `floor`. For negative `X`, the behavior of `fix` is the same as `ceil`.

Examples

Round Matrix Elements Toward Zero

```
X = [-1.9 -3.4; 1.6 2.5; -4.5 4.5]
```

```
X =

   -1.9000   -3.4000
    1.6000    2.5000
   -4.5000    4.5000
```

```
Y = fix(X)
```

```
Y =

    -1    -3
     1     2
    -4     4
```

Round Complex Numbers Toward Zero

```
X = [1.4+2.3i 3.1-2.2i -5.3+10.9i]
```

```
X =
   1.4000 + 2.3000i   3.1000 - 2.2000i  -5.3000 +10.9000i
```

```
Y = fix(X)
```

```
Y =
   1.0000 + 2.0000i   3.0000 - 2.0000i  -5.0000 +10.0000i
```

Input Arguments

X — Input array
scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. For complex `X`, `fix` treats the real and imaginary parts independently.

`fix` converts logical and `char` elements of `X` into `double` values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char` | `logical`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`ceil` | `floor` | `round`

Topics

"Integers"
"Floating-Point Numbers"

Introduced before R2006a

matlab.unittest.fixtures

Summary of classes in MATLAB Fixtures Interface

Description

Fixtures ease creation of setup and teardown code. The `matlab.unittest.fixtures` package consists of the following customized MATLAB fixtures.

matlab.unittest.fixtures.CurrentFolderFixture	Fixture for changing current working folder
matlab.unittest.fixtures.Fixture	Interface class for test fixtures
matlab.unittest.fixtures.PathFixture	Fixture for adding a folder to the MATLAB path
matlab.unittest.fixtures.SuppressedWarningsFixture	Fixture to suppress display of warnings
matlab.unittest.fixtures.TemporaryFolderFixture	Fixture for creating a temporary folder
matlab.unittest.fixtures.WorkingFolderFixture	Fixture for creating and changing to temporary working folder

See Also

Topics

"Write Tests Using Shared Fixtures"
"Create Basic Custom Fixture"
"Create Advanced Custom Fixture"

matlab.unittest.fixtures.CurrentFolderFixture class

Package: matlab.unittest.fixtures

Fixture for changing current working folder

Description

The `CurrentFolderFixture` class provides a fixture for changing the current working folder. When the test framework sets up the fixture, it changes the working folder. When the test framework tears down the fixture, it restores the working folder to its previous state.

Construction

`matlab.unittest.fixtures.CurrentFolderFixture(folder)` constructs a fixture for changing the current working folder to `folder`.

Input Arguments

`folder` — Folder to make the current working folder
character vector

Folder to make the current working folder, specified as a character vector. MATLAB throws an error if `folder` does not exist.

Properties

`Folder`

Folder to make the current working folder, specified as a character vector in the `folder` input argument.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create Fixture to Change Current Working Folder

Create the following `changeFolderFixtureTest` class definition on your MATLAB path. This example assumes that the subfolder `helperFiles` exists in your working folder. Create the `changeToFolder`in your working folder if it does not exist.

The `test1` function includes a call to `pwd` to demonstrate the current path changed to the `helperFiles` folder.

```
classdef changeFolderFixtureTest < matlab.unittest.TestCase
    methods(Test)
        function test1(testCase)
            import matlab.unittest.fixtures.CurrentFolderFixture

            changeToFolder = 'helperFiles';
            testCase.applyFixture(CurrentFolderFixture ...
                (changeToFolder));
            pwd
        end
    end
end
```

At the command prompt, run the test. For the purposes of this example, call `pwd` before and after `run` to show the fixture was properly torn down and the path returned to the pre-test state.

```
currentFolderBeforeTest = pwd
run(changeFolderFixtureTest);
currentFolderAfterTest = pwd
```

```
currentFolderBeforeTest =

H:\Documents\doc_examples

Running changeFolderFixtureTest

ans =

H:\Documents\doc_examples\helperFiles

.
Done changeFolderFixtureTest
```

```
currentFolderAfterTest =

H:\Documents\doc_examples
```

See Also

See Also

matlab.unittest.fixtures.PathFixture | matlab.unittest.TestCase.applyFixture | matlab.unittest.fixtures.WorkingFolderFixture | `matlab.unittest.fixtures`

matlab.unittest.fixtures.Fixture class

Package: matlab.unittest.fixtures

Interface class for test fixtures

Description

The `Fixture` interface class is the means by which test authors create custom fixtures. Fixtures configure the environment state required for tests.

Classes deriving from the `Fixture` interface must implement the `setup` method. This method executes the changes to the environment. A fixture should restore the environment to its initial state when it is torn down. To restore the environment, use the `addTeardown` method in the `setup` method or implement the fixture's `teardown` method.

Subclasses can set the `SetupDescription` and `TeardownDescription` properties in their constructors to provide descriptions for the actions performed by the `setup` and `teardown` methods. The testing framework can display these descriptions when setting up and tearing down the fixture.

A class that derives from `Fixture` must implement the `isCompatible` method if its constructor accepts any input arguments or is otherwise configurable. `Fixture` subclasses use this method to define a notion of interchangeability of fixtures. Two `matlab.unittest.fixtures` instances of the same class are considered to be interchangeable if the `isCompatible` method returns `true`. The `TestRunner` uses the result of `isCompatible` to determine whether two fixture instances of the same class correspond to the same shared test fixture state.

Properties

`SetupDescription`

Description of fixture setup actions, specified as a character vector. The `SetupDescription` property describes the actions the fixture performs when the testing framework invokes the fixture's `setup` method.

`TeardownDescription`

Description of fixture teardown actions, specified as a character vector. The `TeardownDescription` property describes the actions the fixture performs when the testing framework invokes the fixture's `teardown` method.

Methods

applyFixture	Set up fixture to delegate work to another fixture
log	Record diagnostic information
setup	Set up fixture
teardown	Tear down fixture
addTeardown	Dynamically add teardown routine
isCompatible	Determine if two fixtures of the same class are interchangeable

Events

`AssertionFailed`	Triggered upon failing assertion. A `QualificationEventData` object is passed to listener callback functions.
`AssertionPassed`	Triggered upon passing assertion. A `QualificationEventData` object is passed to listener callback functions.
`AssumptionFailed`	Triggered upon failing assumption. A `QualificationEventData` object is passed to listener callback functions.
`AssumptionPassed`	Triggered upon passing assumption. A `QualificationEventData` object is passed to listener callback functions.
`FatalAssertionFailed`	Triggered upon failing fatal assertion. A `QualificationEventData` object is passed to listener callback functions.

`FatalAssertionPassed`	Triggered upon passing fatal assertion. A `QualificationEventData` object is passed to listener callback functions.
`ExceptionThrown`	Triggered by the `TestRunner` when an exception is thrown. An `ExceptionEventData` object is passed to listener callback functions.
`DiagnosticLogged`	Triggered by the `TestRunner` upon a call to the `log` method. A `LoggedDiagnosticEventData` object is passed to the listener callback functions.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.unittest.TestCase.getSharedTestFixtures | matlab.unittest.TestCase.applyFixture | matlab.unittest.qualifications.QualificationEventData | matlab.unittest.qualifications.ExceptionEventData | matlab.unittest.diagnostics.LoggedDiagnosticEventData | addTeardown | `matlab.unittest.fixtures`

Topics

"Create Basic Custom Fixture"
"Create Advanced Custom Fixture"

applyFixture

Class: matlab.unittest.fixtures.Fixture
Package: matlab.unittest.fixtures

Set up fixture to delegate work to another fixture

Syntax

```
applyFixture(fixture1,fixture2)
```

Description

`applyFixture(fixture1,fixture2)` sets up `fixture2` for use with `fixture1`. To delegate work to `fixture2`, call this method from the `setup` method of `fixture1`.

The `applyFixture` method ties the lifecycle of `fixture2` to the lifecycle of `fixture1`. When the testing framework tears down `fixture1`, it also tears down `fixture2`.

Input Arguments

`fixture1` — Primary fixture
instance of `matlab.unittest.fixtures.Fixture`

Primary fixture, specified as an instance of `matlab.unittest.fixtures.Fixture`.

`fixture2` — Fixture applied to primary fixture
instance of `matlab.unittest.fixtures.Fixture`

Fixture for setting up the primary fixture, specified as an instance of `matlab.unittest.fixtures.Fixture`. The primary fixture delegates work to this fixture.

Examples

Create Fixture That Uses Another Fixture

Construct a fixture that creates a temporary text file. The fixture uses a `TemporaryFolderFixture` fixture to create a temporary folder, and then creates a text file within that folder. As part of the `TemporaryTextFileFixture` teardown, the framework also tears down the `TemporaryFolderFixture` at the appropriate time, which deletes the folder and its contents.

```
classdef TemporaryTextFileFixture < matlab.unittest.fixtures.Fixture

    properties (SetAccess=private)
        File
    end

    methods
        function setup(fixture)
            import matlab.unittest.fixtures.TemporaryFolderFixture;
            import matlab.unittest.qualifications.FatalAssertable;

            % Delegate to TemporaryFolderFixture to create a temporary folder
            tempFolder = fixture.applyFixture(TemporaryFolderFixture);

            fixture.File = fullfile(tempFolder.Folder, 'file.txt');

            fid = fopen(fixture.File, 'wt');
            fixture.fatalAssertNotEqual(fid,-1);

            status = fclose(fid);
            fixture.fatalAssertEqual(status,0);
        end
    end
end
```

See Also

See Also

matlab.unittest.TestCase.applyFixture | `matlab.unittest.fixtures`

Introduced in R2016a

log

Class: matlab.unittest.fixtures.Fixture
Package: matlab.unittest.fixtures

Record diagnostic information

Syntax

```
log(f,diagnostic)
log(f,v,diagnostic)
```

Description

`log(f,diagnostic)` logs the supplied diagnostic. The log method provides a means for tests to log information during fixture setup and teardown routines. The testing framework displays logged messages only if you configure it to do so by adding an appropriate plugin, such as the `matlab.unittest.plugins.LoggingPlugin`.

`log(f,v,diagnostic)` logs the diagnostic at the specified verbosity level, `v`.

Input Arguments

`f` — Instance of fixture

`matlab.unittest.fixtures.Fixture` instance

Instance of fixture, specified as a `matlab.unittest.fixtures.Fixture`.

`diagnostic` — Diagnostic information to display upon a failure

string | character vector | function handle | `matlab.unittest.diagnostics.Diagnostic` instance

Diagnostic information to display upon a failure, specified as a string, character vector, function handle, or `matlab.unittest.diagnostics.Diagnostic` instance.

`v` — Verbosity level

2 (default) | `1` | `3` | `4` | `matlab.unittest.Verbosity` enumeration

Verbosity level, specified as an integer value between 1 and 4 or a `matlab.unittest.Verbosity` enumeration object. The default verbosity level for diagnostic messages is `Concise`. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration.

Numeric Representation	Corresponding Enumeration Member	Verbosity Description
1	`matlab.unittest.Verbosity.Terse`	Minimal amount of information
2	`matlab.unittest.Verbosity.Concis`	Typical amount of information
3	`matlab.unittest.Verbosity.Detail`	Supplemental amount of information
4	`matlab.unittest.Verbosity.Verbos`	Surplus of information

Examples

Log Diagnostic Information

In a file, `FormatHexFixture.m`, in your current working folder, create the following fixture.

```
classdef FormatHexFixture < matlab.unittest.fixtures.Fixture
    properties (Access=private)
        OriginalFormat
    end
    methods
        function setup(fixture)
            fixture.OriginalFormat = get(0,'Format');
            fixture.log(['The previous format setting was ',...
                fixture.OriginalFormat])
            log(fixture,'Setting Format')
            set(0,'Format','hex')
            log(fixture,3,'Format Set')
        end
        function teardown(fixture)
            log(fixture,'Resetting Format')
            set(0,'Format',fixture.OriginalFormat)
            log(fixture,3,'Original Format Restored')
        end
```

```
    end
end
```

In a file, `SampleTest.m`, in your current working folder, create the following test class.

```
classdef SampleTest < matlab.unittest.TestCase
    methods (Test)
        function test1(testCase)
            testCase.applyFixture(FormatHexFixture);
            actStr = getColumnForDisplay([1;2;3], 'Small Integers');
            expStr = ['Small Integers  '
                '3ff0000000000000'
                '4000000000000000'
                '4008000000000000'];
            testCase.verifyEqual(actStr, expStr)
        end
    end
end

function str = getColumnForDisplay(values, title)
elements = cell(numel(values)+1, 1);
elements{1} = title;
for idx = 1:numel(values)
    elements{idx+1} = displayNumber(values(idx));
end
str = char(elements);
end

function str = displayNumber(n)
str = strtrim(evalc('disp(n);'));
end
```

Run the test.

```
result = run(SampleTest);
```

```
Running SampleTest
.
Done SampleTest
__________
```

None of the logged messages are displayed because the default test runner has a verbosity level of 1 (`Terse`) and the default log message is at level 2 (`Concise`).

Create a test runner to report the diagnostics at levels 1, 2, and 3 and rerun the test.

```
import matlab.unittest.TestRunner
import matlab.unittest.plugins.LoggingPlugin

ts = matlab.unittest.TestSuite.fromClass(?SampleTest);
runner = TestRunner.withNoPlugins;
p = LoggingPlugin.withVerbosity(3);
runner.addPlugin(p);

results = runner.run(ts);
```

```
 [Concise] Diagnostic logged (2014-04-23T13:17:35): The previous format setting was sho
 [Concise] Diagnostic logged (2014-04-23T13:17:35): Setting Format
[Detailed] Diagnostic logged (2014-04-23T13:17:35): Format Set
 [Concise] Diagnostic logged (2014-04-23T13:17:35): Resetting Format
[Detailed] Diagnostic logged (2014-04-23T13:17:35): Original Format Restored
```

See Also

See Also

matlab.unittest.plugins.LoggingPlugin | matlab.unittest.Verbosity

Introduced in R2014b

setup

Class: matlab.unittest.fixtures.Fixture
Package: matlab.unittest.fixtures

Set up fixture

Syntax

```
setup(f)
```

Description

`setup(f)` sets up a fixture by performing the defined environment modifications. Classes deriving from the `Fixture` interface must implement the `setup` method. This method executes the changes to the environment. A fixture should restore the environment to its initial state when it is torn down. To restore the environment, use the `addTeardown` method in the `setup` method or implement the fixture's `teardown` method.

Input Arguments

f

`matlab.unittest.fixtures.Fixture` instance

See Also

See Also

matlab.unittest.fixtures.Fixture | matlab.unittest.fixtures.Fixture.teardown | matlab.unittest.fixtures.Fixture.addTeardown

Topics

"Create Basic Custom Fixture"

"Create Advanced Custom Fixture"

teardown

Class: matlab.unittest.fixtures.Fixture
Package: matlab.unittest.fixtures

Tear down fixture

Syntax

```
teardown(f)
```

Description

`teardown(f)` tears down a fixture by performing the defined actions to restore the environment to the initial state.

Input Arguments

f

`matlab.unittest.fixtures.Fixture` instance

Alternatives

Instead of defining a `teardown` method, you can define teardown actions within the setup method by implementing the addTeardown method.

See Also

See Also

matlab.unittest.fixtures.Fixture | matlab.unittest.fixtures.Fixture.addTeardown | matlab.unittest.fixtures.Fixture.setup

Topics

"Create Basic Custom Fixture"
"Create Advanced Custom Fixture"

addTeardown

Class: matlab.unittest.fixtures.Fixture
Package: matlab.unittest.fixtures

Dynamically add teardown routine

Syntax

```
addTeardown(f,tearDownFcn)
addTeardown(f,tearDownFcn,arg1,...,argN)
```

Description

`addTeardown(f,tearDownFcn)` adds the `tearDownFcn` function handle that defines fixture teardown code to the `Fixture` instance. The teardown code is executed in the reverse order to which it is added. This is known as LIFO (or Last-In-First-Out).

`addTeardown(f,tearDownFcn,arg1,...,argN)` provides input arguments to the `tearDownFcn`.

Input Arguments

`f`

`matlab.unittest.fixtures.Fixture` instance

`tearDownFcn`

Function that defines the fixture teardown code, specified as a function handle.

`arg1,...,argN`

Input arguments required by `tearDownFcn`, specified by any type. The argument type is specified by the `tearDownFcn` function argument list.

Alternatives

Instead of defining teardown actions within the setup method by implementing the `addTeardown` method, you can implement the teardown method.

See Also

See Also

matlab.unittest.fixtures.Fixture | matlab.unittest.fixtures.Fixture.teardown | matlab.unittest.fixtures.Fixture.setup

Topics

"Create Advanced Custom Fixture"

isCompatible

Class: matlab.unittest.fixtures.Fixture
Package: matlab.unittest.fixtures

Determine if two fixtures of the same class are interchangeable

Syntax

```
TF = isCompatible(f1, f2)
```

Description

`TF = isCompatible(f1, f2)` determines if two fixtures of the same class are interchangeable. The `isCompatible` method returns either logical `1` (`true`) or logical `0` (`false`).

A class that derives from `Fixture` must implement the `isCompatible` method if its constructor accepts any input arguments or is otherwise configurable. `Fixture` subclasses use this method to define a notion of interchangeability of fixtures. Two `matlab.unittest.fixtures` instances of the same class are considered to be interchangeable if the `isCompatible` method returns `true`. The `TestRunner` uses the result of `isCompatible` to determine whether two fixture instances of the same class correspond to the same shared test fixture state. The test framework always calls the `isCompatible` method with two fixture instances of the same class, so the fixture author does not need to implement code to handle the case where the second fixture is a different `fixtures` class.

Input Arguments

`f`

`matlab.unittest.fixtures.Fixture` instance

Attributes

Access	Protected

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.unittest.fixtures.Fixture

Topics

"Create Advanced Custom Fixture"

matlab.unittest.fixtures.PathFixture class

Package: matlab.unittest.fixtures

Fixture for adding a folder to the MATLAB path

Description

The `PathFixture` class provides a fixture for adding a folder to the MATLAB path. When the test framework sets up the fixture, it adds the specified folder to the path. When the test framework tears down the fixture, it restores the MATLAB path to its previous state.

Construction

`matlab.unittest.fixtures.PathFixture(folder)` constructs a fixture for adding a folder to the MATLAB path. When the test framework sets up the fixture, it adds `folder` to the path. When it tears down the fixture, it restores the MATLAB path to its previous state.

`matlab.unittest.fixtures.PathFixture(folder, Name,Value)` constructs a fixture with additional options specified by one or more `Name,Value` pair arguments. For example, `matlab.unittest.fixtures.PathFixture('myFolder','IncludingSubfolders',true)` constructs a fixture that adds `myFolder` and any of its subfolders to the path.

Input Arguments

`folder` — Folder to add to the MATLAB path

character vector

Folder to add to the MATLAB path, specified as a character vector. If `folder` does not exist, MATLAB throws an error.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'IncludingSubfolders'` — Setting to include subfolders on path
`false` (default) | `true`

Setting to include subfolders of `folder` on the path, specified as `false` or `true` (`logical 0` or `1`). This value is false by default. If you specify it as true, the test framework includes subfolders of `folder` on the path. Package, class, and private folders are not added to the path, even when this property is `true`.

`'Position'` — Location of where on the path to add the folder
`'begin'` (default) | `'end'`

Location of where on the path to add the folder, specified as `'begin'` or `'end'`. The default value is `'begin'`, which adds `folder` to the beginning (top) of the path.

If you use this option with `IncludingSubfolders`, the fixture adds the folder and its subfolders to the top or bottom of the path as a single block with `folder` on the top.

Properties

`Folder`

Folder to add to the MATLAB path, specified as a character vector in the `folder` input argument.

`IncludeSubfolders`

Indicator to include subfolders of `folder` on the path, specified as `false` or `true` (`logical 0` or `1`). This property is read only. It is false by default, but you can specify it as true during construction.

`Position`

Indicator of where on the path to add folder, specified as `'begin'` or `'end'`. This property is read only. It is `'begin'` by default, but you can specify it as `'end'` during construction.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Add Folder to MATLAB Path for Testing

Create the following `addPathFixtureTest` class definition on your MATLAB path. This example assumes that the subfolder,`helperFiles`, exists in your working folder. If it does not, define `addFolder` to be a folder that exists within your current folder.

```
classdef addPathFixtureTest < matlab.unittest.TestCase
    methods(Test)
        function test1(testCase)
            import matlab.unittest.fixtures.PathFixture

            addFolder = 'helperFiles';
            f = testCase.applyFixture(PathFixture(addFolder));
            disp(['Added to path: ' f.Folder])
        end
    end
end
```

At the command prompt, run the test.

```
run(addPathFixtureTest);
```

```
Running addPathFixtureTest
Added to path: H:\Documents\doc_examples\helperFiles
.
Done addPathFixtureTest
_________
```

After the tests finish running, the framework removes the folder from the path.

Add Folder to Path Using Shared Test Fixture

Create the following `sharedAddPathFixtureTest` class definition on your MATLAB path. This example assumes that the subfolder, `helperFiles`, exists in your working folder.

```
classdef (SharedTestFixtures={ ...
        matlab.unittest.fixtures.PathFixture('helperFiles')}) ...
        sharedAddPathFixtureTest < matlab.unittest.TestCase
    methods(Test)
        function test1(testCase)
            f = testCase.getSharedTestFixtures;
```

```
            disp(['Added to path: ' f.Folder])
        end
    end
end
```

At the command prompt, run the test.

```
run(sharedAddPathFixtureTest);
```

```
Setting up PathFixture
Done setting up PathFixture: Added 'H:\Documents\doc_examples\helperFiles' to the path.
__________

Running sharedAddPathFixtureTest
Added to path: H:\Documents\doc_examples\helperFiles
.
Done sharedAddPathFixtureTest
__________

Tearing down PathFixture
Done tearing down PathFixture: Restored the path to its original state.
__________
```

After the tests finish running, the framework removes the folder from the path.

See Also

See Also

matlab.unittest.fixtures.CurrentFolderFixture | matlab.unittest.TestCase.applyFixture | matlab.unittest.fixtures.WorkingFolderFixture | `matlab.unittest.fixtures`

matlab.unittest.fixtures.SuppressedWarningsFixture class

Package: matlab.unittest.fixtures

Fixture to suppress display of warnings

Description

The `SuppressedWarningsFixture` class provides a fixture to suppress the display of warnings. When set up, `SuppressedWarningsFixture` disables one or more specified warnings. When torn down, the fixture restores the states of warnings to their previous values.

Construction

`matlab.unittest.fixtures.SuppressedWarningsFixture(warnIDs)` constructs a fixture to suppress the display of one or more warnings.

Input Arguments

`warnIDs` — Identifier for warnings disabled when the fixture is set up
character vector | cell array of character vectors

Warning identifiers for the warnings to be suppressed, specified as a character vector or cell array of character vectors.

Properties

`Warnings`

Warning identifiers describing warnings to suppress specified as a cell array of character vectors in the `warnings` input argument.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create Fixture to Suppress Warnings

Suppress the warning that occurs when you try to remove a folder from the search path that is not on the search path.

Remove the folder, `folderthatisnotonpath` from your path, assuming it does not exist.

```
rmpath('folderthatisnotonpath')
```

```
Warning: "folderthatisnotonpath" not found in path.
> In rmpath at 58
```

A warning appears because `rmpath` cannot find the folder.

Suppress the warning during testing by creating the following `suppressWarningsTest` class definition on your MATLAB path.

```
classdef suppressWarningsTest < matlab.unittest.TestCase
    methods(Test)
        function test1(testCase)
            import matlab.unittest.fixtures.SuppressedWarningsFixture

            testCase.applyFixture(...
                SuppressedWarningsFixture('MATLAB:rmpath:DirNotFound'));

            % would otherwise cause warning
            rmpath('folderthatisnotonpath')
        end
    end
end
```

At the command prompt, run the test. For the purposes of this example, call `rmpath` before and after running the test to show the warning is not suppressed outside execution of the test.

```
rmpath('folderthatisnotonpath')
run(suppressWarningsTest);
rmpath('folderthatisnotonpath')
```

```
Warning: "folderthatisnotonpath" not found in path.
> In rmpath at 58
Running suppressWarningsTest
.
Done suppressWarningsTest
__________

Warning: "folderthatisnotonpath" not found in path.
> In rmpath at 58
```

Note that the call to `rmpath` within `suppressWarningsTest` does not result in a warning.

See Also

See Also

matlab.unittest.TestCase.applyFixture | `matlab.unittest.fixtures` | `warning`

matlab.unittest.fixtures.TemporaryFolderFixture class

Package: matlab.unittest.fixtures

Fixture for creating a temporary folder

Description

The `matlab.unittest.fixtures.TemporaryFolderFixture` provides a fixture to create a temporary folder. When the testing framework sets up the fixture, it creates the temporary folder. When it tears down the fixture, it deletes the folder and all its contents. Before it deletes the folder, the fixture clears from memory the definitions of any MATLAB-files, P-files, and MEX-files that are defined in the temporary folder.

Both the `TemporaryFolderFixture` and `WorkingFolderFixture` fixtures create a temporary folder. Unlike the `WorkingFolderFixture`, the `TemporaryFolderFixture` does not set the folder as the current working folder.

Construction

`matlab.unittest.fixtures.TemporaryFolderFixture` constructs a fixture for creating a temporary folder.

`matlab.unittest.fixtures.TemporaryFolderFixture(Name,Value)` constructs a fixture for creating a temporary folder with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'PreservingOnFailure'` — Preservation state of temporary folder and contents after test failure

`false` (default) | `true`

Indicator of whether the temporary folder and its contents are preserved in the event of a test failure, specified as `false` or `true` (`logical 0` or `1`). This property is `false` by default. You can specify it as `true` during fixture construction.

Data Types: `logical`

`'WithSuffix'` — Suffix for temporary folder name
character vector (default)

Suffix for temporary folder name, specified as a character vector.

Properties

`Folder`

Absolute path of the folder created by the fixture, specified as a character vector.

`PreserveOnFailure`

Indicator of whether the temporary folder and its contents are preserved in the event of a test failure. This property is `logical(0)` or `logical(1)`. It is `logical(0)` by default but is set to `logical(1)` if the `'PreservingOnFailure'` input value is set to `true` during fixture construction.

`Suffix`

Suffix used for temporary folder, specified as a character vector in the `Name,Value` pair argument, `'WithSuffix'`.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create Temporary Folder Fixture

Create the following `tempFolderFixtureTest` class definition on your MATLAB path.

```
classdef tempFolderFixtureTest < matlab.unittest.TestCase
    methods(Test)
        function test1(testCase)
            import matlab.unittest.fixtures.TemporaryFolderFixture

            tempFolder = testCase.applyFixture(TemporaryFolderFixture);

            disp(['The temporary folder: ' tempFolder.Folder])
        end
    end
end
```

At the command prompt, run the test.

```
run(tempFolderFixtureTest);
```

```
Running tempFolderFixtureTest
The temporary folder: C:\Temp\tpfb1ae2cf_c9de_4de3_9557_00d52bfcc1b2
.
Done tempFolderFixtureTest
_________
```

The name of the temporary folder varies.

Create Temporary Folder Fixture Persisting Through Test Failure

Create the following `anotherTempFolderFixtureTest` class definition on your MATLAB path. For the purposes of this example, the `test1` function contains an assertion that causes test failure.

```
classdef anotherTempFolderFixtureTest < matlab.unittest.TestCase
    methods(Test)
        function test1(testCase)
            import matlab.unittest.fixtures.TemporaryFolderFixture

            testCase.applyFixture(TemporaryFolderFixture( ...
                'PreservingOnFailure',true,'WithSuffix','TestData'));

            % Failed assertion, perserved temporary folder
            testCase.assertEqual(1,2)
        end
    end
end
```

At the command prompt, run the test.

```
run(anotherTempFolderFixtureTest);
```

```
Running anotherTempFolderFixtureTest

================================================================================
Assertion failed in anotherTempFolderFixtureTest/test1 and it did not run to completion.

    ---------------------
    Framework Diagnostic:
    ---------------------
    assertEqual failed.
```

```
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                1         2           -1       -0.5

    Actual double:
             1
    Expected double:
             2

    ------------------
    Stack Information:
    ------------------
    In C:\Documents\anotherTempFolderFixtureTest.m (anotherTempFolderFixtureTest.test1) at 10
==============================================================================
   [Terse] Diagnostic logged (2014-04-01T13:50:51):
Because of a failure in the test using the TemporaryFolderFixture, the following folder will not be deleted:
C:\Temp\tp9f5aa9f1_ead1_4462_91f2_08bbe7d0316cTestData


.
Done anotherTempFolderFixtureTest
__________

Failure Summary:

     Name                                Failed  Incomplete  Reason(s)
    ==============================================================================
     anotherTempFolderFixtureTest/test1    X         X       Failed by assertion.
```

The test failed and the temporary folder persists. You can open the temporary folder, shown here as `C:\Temp\tp9f5aa9f1_ead1_4462_91f2_08bbe7d0316cTestData`, and examine any contents.

See Also

See Also

matlab.unittest.fixtures.PathFixture | matlab.unittest.fixtures.CurrentFolderFixture | matlab.unittest.fixtures.WorkingFolderFixture | matlab.unittest.TestCase.applyFixture | `matlab.unittest.fixtures`

Introduced in R2013b

matlab.unittest.fixtures.WorkingFolderFixture class

Package: matlab.unittest.fixtures

Fixture for creating and changing to temporary working folder

Description

The `matlab.unittest.fixtures.WorkingFolderFixture` creates a temporary folder and sets it as the current working folder. The test or the product under test can create files and modify the contents of the folder without affecting the source code or test folder structure.

When the testing framework sets up the fixture, it adds the current folder to the path. Then, the fixture creates a temporary folder, and changes the current working folder to the temporary folder. When the testing framework tears down the fixture, by default, it deletes the temporary folder and all folder contents. The testing framework restores the current working folder to its previous state.

Both the `WorkingFolderFixture` and `TemporaryFolderFixture` fixtures create a temporary folder. However, the `WorkingFolderFixture` also sets the folder as the current working folder.

Construction

`matlab.unittest.fixtures.WorkingFolderFixture` constructs a fixture for creating and changing to a temporary working folder.

`matlab.unittest.fixtures.WorkingFolderFixture(Name,Value)` constructs a fixture with additional options specified by one or more `Name,Value` pair arguments. For example, `matlab.unittest.fixtures.WorkingFolderFixture('PreservingOnFailure',true)` constructs a fixture that does not delete the temporary folder in the event of an error.

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'PreservingOnFailure'` — Setting to preserve temporary folder and contents after test failure
`false` (default) | `true`

Setting to preserve the temporary folder and contents after test failure, specified as `false` or `true` (`logical 0` or `1`). This value is `false` by default. You can specify it as `true` during fixture construction.

If you specify `'PreservingOnFailure'` as `true` and a test using the fixture encounters a failure, the testing framework displays a message in the Command Window and does not delete the folder. Failures include verification, assertion, or fatal assertion qualification failures and uncaught errors within the tests that use the fixture. Preserving the temporary folder and its contents can aid in investigation of the cause of the test failure.

Data Types: `logical`

`'WithSuffix'` — Suffix for temporary folder name
character vector

Suffix for temporary folder name, specified as a character vector. The value of this parameter is appended to the name of the temporary folder.

Example: `WorkingFolderFixture('WithSuffix','_ProductA')`

Properties

`Folder` — Absolute path of the folder created by the fixture
character vector

Absolute path of the folder created by the fixture, specified as a character vector.

`PreserveOnFailure` — Indicator to preserve temporary folder
`false` (default) | `true`

Indicator to preserve the temporary folder and its contents in the event of a test failure, specified as `false` or `true`. Set this property through the constructor via the name-value pair argument `'PreservingOnFailure'`.

`Suffix` — Suffix for temporary folder name
character vector

Suffix for the temporary folder name, specified as a character vector. Set this property through the constructor via the name-value pair argument `'WithSuffix'`.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create Temporary Working Folder

Create the following `ExampleTest` class definition on your MATLAB path.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function test1(testCase)
            import matlab.unittest.fixtures.WorkingFolderFixture;

            testCase.applyFixture(WorkingFolderFixture);

            x = 1:10;

            % Save a file in the temporary folder
            save('data.mat','x');

            disp(['The temporary working folder: ' pwd])
            ls
        end
    end
```

```
end
```

At the command prompt, run the test.

```
run(ExampleTest);
```

```
Running ExampleTest
The temporary working folder: C:\AppData\Local\Temp\tp6ff2cadf_9eed_4e90_88c1_5ff9ee8ab

.         ..        data.mat

.
Done ExampleTest
__________
```

The name of the temporary folder varies.

Specify Suffix for Temporary Working Folder Name

Create the following `ExampleTest2` class definition on your MATLAB path.

```
classdef ExampleTest2 < matlab.unittest.TestCase
    methods(Test)
        function test1(testCase)
            import matlab.unittest.fixtures.WorkingFolderFixture;

            f = WorkingFolderFixture('WithSuffix','_ProductA');
            testCase.applyFixture(f);

            x = 1:10;

            % Save a file in the temporary folder
            save('data.mat','x');

            disp(['The temporary working folder: ' pwd])
            ls
        end
    end
end
```

At the command prompt, run the test.

```
run(ExampleTest2);
```

```
Running ExampleTest2
```

```
The temporary working folder: C:\AppData\Local\Temp\tp72c6ce7c_a380_4f5e_be3b_4f7191a6c

.         ..        data.mat

.
Done ExampleTest2
__________
```

The name of the temporary folder varies, but it ends with `_ProductA`.

See Also

See Also

matlab.unittest.fixtures.PathFixture | matlab.unittest.fixtures.CurrentFolderFixture | matlab.unittest.fixtures.TemporaryFolderFixture | matlab.unittest.TestCase.applyFixture | `matlab.unittest.fixtures`

Introduced in R2016a

flag

Flag colormap array

Syntax

```
c = flag
c = flag(m)
```

Description

`c = flag` returns the flag colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = flag(m)` returns the colormap with `m` colors.

Examples

Downsample the Flag Colormap

Create a scatter plot using the default colors.

```
x = [3.5 3.3 5 6.1 4 2];
y = [14 5.7 12 6 8 9];
sz = 100*[6 100 20 3 15 20];
c = [3 1 2 3 1 2];
scatter(x,y,sz,c,'filled','MarkerEdgeColor','k','MarkerFaceAlpha',.7);
xlim([1 7]);
ylim([1 16]);
```

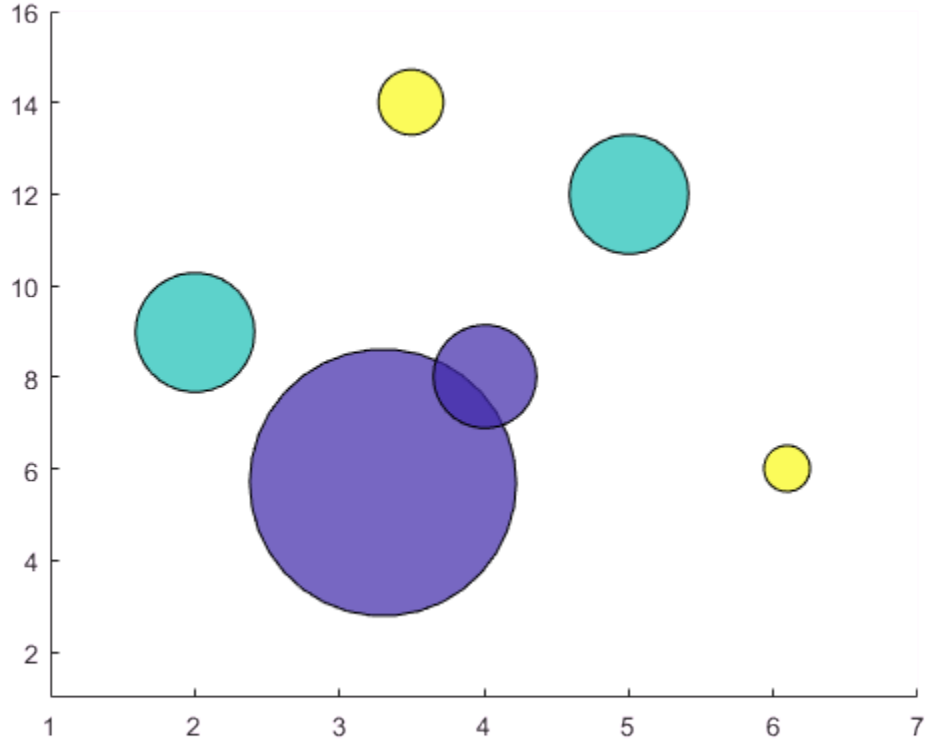

Get the flag colormap array with three entries. Then replace the colormap in the scatter plot.

```
c = flag(3);
colormap(c);
```

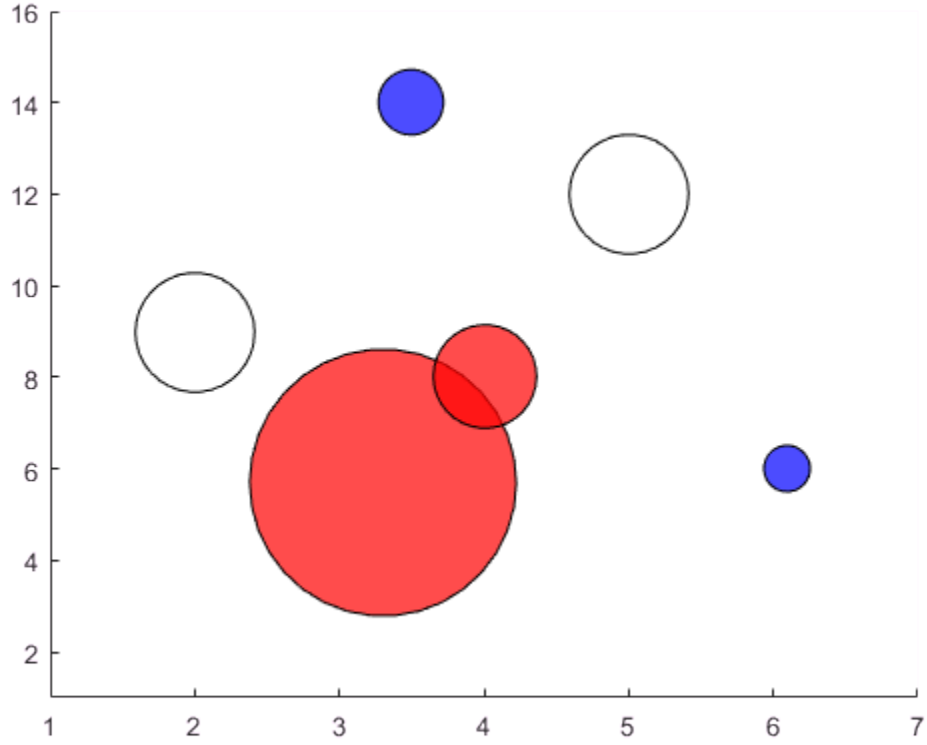

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

flintmax

Largest consecutive integer in floating-point format

Syntax

```
f = flintmax
f = flintmax(precision)
```

Description

`f = flintmax` returns the largest consecutive integer in IEEE® double precision, which is `2^53`. Above this value, double-precision format does not have integer precision, and not all integers can be represented exactly.

`f = flintmax(precision)` returns the largest consecutive integer in IEEE single or double precision. `flintmax` returns `single(2^24)` for single precision and `2^53` for double precision.

Examples

Double Precision

Return the largest consecutive integer in IEEE® double precision, `2^53`.

```
format long e
f = flintmax
```

```
f =
     9.007199254740992e+15
```

Single Precision

Return the largest consecutive integer in IEEE® single precision, `single(2^24)`.

```
f = flintmax('single')
```

```
f = single
    16777216
```

Check the class of `f`.

```
class(f)
```

```
ans =
'single'
```

Limit of Integer Single Precision

Above the value returned by `flintmax('single')`, not all integers can be represented exactly with single precision.

Return the largest consecutive integer in IEEE® single precision, `single(2^24)`.

```
f = flintmax('single')
```

```
f = single
    16777216
```

Add `1` to the value returned from `flintmax`.

```
f1 = f+1
```

```
f1 = single
    16777216
```

`f1` is the same as `f`.

```
isequal(f,f1)
```

```
ans = logical
   1
```

Add `2` to the value returned from `flintmax`. The number `16777218` is represented exactly in single precision while `16777217` is not.

```
f2 = f+2
```

```
f2 = single
    16777218
```

Input Arguments

`precision` — Floating-point precision type

`'double'` (default) | `'single'`

Floating-point precision type, specified as `'double'` or `'single'`.

Data Types: `char`

Output Arguments

`f` — Largest consecutive integer in floating-point format

scalar constant

Largest consecutive integer in floating-point format returned as a scalar constant. This constant is `2^53` for double precision and `single(2^24)` for single precision.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`eps` | `format` | `intmax` | `realmax`

Topics

"Floating-Point Numbers"

Introduced in R2013a

flip

Flip order of elements

Syntax

```
B = flip(A)
B = flip(A,dim)
```

Description

`B = flip(A)` returns array `B` the same size as `A`, but with the order of the elements reversed. The dimension that is reordered in `B` depends on the shape of `A`:

- If `A` is vector, then `flip(A)` reverses the order of the elements along the length of the vector.
- If `A` is a matrix, then `flip(A)` reverses the elements in each column.
- If `A` is an N-D array, then `flip(A)` operates on the first dimension of `A` in which the size value is not `1`.

`B = flip(A,dim)` reverses the order of the elements in `A` along dimension `dim`. For example, if `A` is a matrix, then `flip(A,1)` reverses the elements in each column, and `flip(A,2)` reverses the elements in each row.

Examples

Flip Character Vector

```
A = 'no word, no bond, row on.';
B = flip(A)
```

```
B =
'.no wor ,dnob on ,drow on'
```

Flip Column Vector

```
A = [1;2;3];
```

```
B = flip(A)
```

```
B =

     3
     2
     1
```

Flip Matrix

Create a diagonal matrix, A.

```
A = diag([100 200 300])
```

```
A =

   100     0     0
     0   200     0
     0     0   300
```

Flip A without specifying the `dim` argument.

```
B = flip(A)
```

```
B =

     0     0   300
     0   200     0
   100     0     0
```

Now, flip A along the second dimension.

```
B = flip(A,2)
```

```
B =

     0     0   100
     0   200     0
   300     0     0
```

Flip N-D Array

Create a 1-by-3-by-2 array.

```
A = zeros(1,3,2);
A(:,:,1) = [1 2 3];
A(:,:,2) = [4 5 6];
A
```

```
A =

(:,:,1) =

     1     2     3


(:,:,2) =

     4     5     6
```

Flip A without specifying the `dim` argument.

```
B = flip(A)
```

```
B =

(:,:,1) =

     3     2     1


(:,:,2) =

     6     5     4
```

Now, flip A along the third dimension.

```
B = flip(A,3)
```

```
B =

(:,:,1) =

     4     5     6
```

```
(:,:,2) =

     1     2     3
```

Flip Cell Array

Create a 3-by-2 cell array.

```
A = {'foo',1000; 999,true; 'aaa','bbb'}
```

```
A = 3×2 cell array
    'foo'    [1000]
    [999]    [   1]
    'aaa'    'bbb'
```

Flip A without specifying the `dim` argument.

```
B = flip(A)
```

```
B = 3×2 cell array
    'aaa'    'bbb'
    [999]    [   1]
    'foo'    [1000]
```

Now, flip A along the second dimension.

```
B = flip(A,2)
```

```
B = 3×2 cell array
    [1000]    'foo'
    [   1]    [999]
    'bbb'     'aaa'
```

Input Arguments

A — Input array

vector | matrix | multidimensional array | table | timetable

Input array, specified as a vector, matrix, multidimensional array, table, or timetable.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `cell` | `table` | `timetable` | `categorical` | `datetime` | `duration` | `calendarDuration`

Example: `[1 2 3 4]`

Example: `['abcde']`

Example: `[1 2; 3 4]`

Example: `{'abcde',[1 2 3]}`

Example: `table(rand(1,5),rand(1,5))`

`dim` — Dimension to operate along
positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

The following illustration shows the difference between `dim=1` and `dim=2` when `A` is a matrix.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays for the first argument.

See Also

See Also

`fliplr` | `flipud` | `permute` | `rot90` | `transpose`

Introduced in R2013b

flipdim

(Not recommended) Flip array along specified dimension

Compatibility

`flipdim` is not recommended. Use `flip` instead.

Syntax

```
B = flipdim(A,dim)
```

Description

`B = flipdim(A,dim)` returns `A` with dimension `dim` flipped.

When the value of `dim` is `1`, the array is flipped row-wise down. When `dim` is `2`, the array is flipped columnwise left to right. `flipdim(A,1)` is the same as `flipud(A)`, and `flipdim(A,2)` is the same as `fliplr(A)`.

Examples

`flipdim(A,1)` where

```
A =

     1     4
     2     5
     3     6
```

produces

```
     3     6
     2     5
```

1 4

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays for the first argument.

See Also

`fliplr` | `flipud` | `permute` | `rot90` | `flip`

Introduced before R2006a

fliplr

Flip array left to right

Syntax

```
B = fliplr(A)
```

Description

`B = fliplr(A)` returns `A` with its columns flipped in the left-right direction (that is, about a vertical axis).

If `A` is a row vector, then `fliplr(A)` returns a vector of the same length with the order of its elements reversed. If `A` is a column vector, then `fliplr(A)` simply returns `A`. For multidimensional arrays, `fliplr` operates on the planes formed by the first and second dimensions.

Examples

Flip Row Vector

Create a row vector.

```
A = 1:10
```

```
A =

     1     2     3     4     5     6     7     8     9    10
```

Use `fliplr` to flip the elements of `A` in the horizontal direction.

```
B = fliplr(A)
```

```
B =
```

```
    10     9     8     7     6     5     4     3     2     1
```

The order of the elements in B is reversed compared to A.

Flip Cell Array of Characters

Create a 3-by-3 cell array of characters.

```
A = {'a' 'b' 'c'; 'd' 'e' 'f'; 'g' 'h' 'i'}
```

```
A = 3×3 cell array
    'a'    'b'    'c'
    'd'    'e'    'f'
    'g'    'h'    'i'
```

Change the order of the columns in the horizontal direction by using `fliplr`.

```
B = fliplr(A)
```

```
B = 3×3 cell array
    'c'    'b'    'a'
    'f'    'e'    'd'
    'i'    'h'    'g'
```

The order of the first and third columns of A is switched in B, while the second column remains unchanged.

Flip Multidimensional Array

Create a multidimensional array.

```
A = cat(3, [1 2; 3 4], [5 6; 7 8])
```

```
A =

(:,:,1) =

     1     2
     3     4
```

```
(:,:,2) =

     5     6
     7     8
```

A is an array of size 2-by-2-by-2.

Flip the elements on each page of A in the horizontal direction.

```
B = fliplr(A)
```

```
B =

(:,:,1) =

     2     1
     4     3


(:,:,2) =

     6     5
     8     7
```

The result, B, is the same size as A, but the horizontal order of the elements is flipped. The operation flips the elements on each page independently.

Input Arguments

A — Input array

vector | matrix | multidimensional array | table | timetable

Input array, specified as a vector, matrix, multidimensional array, table, or timetable.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string | struct | cell | table | timetable | categorical | datetime | duration | calendarDuration
Complex Number Support: Yes

Tips

- `fliplr(A)` is equivalent to `flip(A,2)`.
- Use the `flipud` function to flip arrays in the vertical direction (that is, about a horizontal axis).
- The `flip` function can flip arrays in any direction.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays.

See Also

See Also

`flip` | `flipud` | `rot90`

Introduced before R2006a

flipud

Flip array up to down

Syntax

```
B = flipud(A)
```

Description

`B = flipud(A)` returns `A` with its rows flipped in the up-down direction (that is, about a horizontal axis).

If `A` is a column vector, then `flipud(A)` returns a vector of the same length with the order of its elements reversed. If `A` is a row vector, then `flipud(A)` simply returns `A`. For multidimensional arrays, `flipud` operates on the planes formed by the first and second dimensions.

Examples

Flip Column Vector

Create a column vector.

```
A=(1:10)'
```

```
A =

     1
     2
     3
     4
     5
     6
     7
     8
     9
```

```
    10
```

Use `flipud` to flip the elements of A in the vertical direction.

```
B = flipud(A)
```

```
B =

    10
     9
     8
     7
     6
     5
     4
     3
     2
     1
```

The order of the elements in B is reversed compared to A.

Flip Cell Array of Characters

Create a 3-by-3 cell array of characters.

```
A = {'a' 'b' 'c'; 'd' 'e' 'f'; 'g' 'h' 'i'}
```

```
A = 3×3 cell array
    'a'    'b'    'c'
    'd'    'e'    'f'
    'g'    'h'    'i'
```

Change the order of the rows in the vertical direction by using `flipud`.

```
B = flipud(A)
```

```
B = 3×3 cell array
    'g'    'h'    'i'
    'd'    'e'    'f'
    'a'    'b'    'c'
```

The order of the first and third rows of A is switched in B, while the second row remains unchanged.

Flip Multidimensional Array

Create a multidimensional array.

```
A = cat(3, [1 2; 3 4], [5 6; 7 8])
```

```
A =

(:,:,1) =

     1     2
     3     4


(:,:,2) =

     5     6
     7     8
```

A is an array of size 2-by-2-by-2.

Flip the elements on each page of A in the vertical direction.

```
B = flipud(A)
```

```
B =

(:,:,1) =

     3     4
     1     2


(:,:,2) =

     7     8
     5     6
```

The result, B, is the same size as A, but the vertical order of the elements is flipped. The operation flips the elements on each page independently.

Input Arguments

A — Input array

vector | matrix | multidimensional array | table | timetable

Input array, specified as a vector, matrix, multidimensional array, table, or timetable.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `cell` | `table` | `timetable` | `categorical` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

Tips

- `flipud(A)` is equivalent to `flip(A,1)`.
- Use the `fliplr` function to flip arrays in the horizontal direction (that is, about a vertical axis).
- The `flip` function can flip arrays in any direction.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays.

See Also

See Also

`flip` | `fliplr` | `rot90`

Introduced before R2006a

floor

Round toward negative infinity

Syntax

```
Y = floor(X)
```

```
Y = floor(t)
Y = floor(t,unit)
```

Description

`Y = floor(X)` rounds each element of `X` to the nearest integer less than or equal to that element.

`Y = floor(t)` rounds each element of the `duration` array `t` to the nearest number of seconds less than or equal to that element.

`Y = floor(t,unit)` rounds each element of `t` to the nearest number of the specified unit of time less than or equal to that element.

Examples

Round Matrix Elements Toward Negative Infinity

```
X = [-1.9  -0.2  3.4;  5.6  7.0  2.4+3.6i];
Y = floor(X)
```

```
Y =
  -2.0000 + 0.0000i  -1.0000 + 0.0000i   3.0000 + 0.0000i
   5.0000 + 0.0000i   7.0000 + 0.0000i   2.0000 + 3.0000i
```

Round Duration Values Toward Negative Infinity

Round each value in a `duration` array to the nearest number of seconds less than or equal to that value.

```
t = hours(8) + minutes(29:31) + seconds(1.23);
t.Format = 'hh:mm:ss.SS'
```

```
t = 1×3 duration array
   08:29:01.23   08:30:01.23   08:31:01.23
```

```
Y1 = floor(t)
```

```
Y1 = 1×3 duration array
   08:29:01.00   08:30:01.00   08:31:01.00
```

Round each value in `t` to the nearest number of hours less than or equal to that value.

```
Y2 = floor(t,'hours')
```

```
Y2 = 1×3 duration array
   08:00:00.00   08:00:00.00   08:00:00.00
```

Input Arguments

`X` — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. For complex `X`, `floor` treats the real and imaginary parts independently.

`floor` converts logical and `char` elements of `X` into `double` values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char` | `logical`
Complex Number Support: Yes

`t` — Input duration

`duration` array

Input duration, specified as a `duration` array.

`unit` — Unit of time

`'seconds'` (default) | `'minutes'` | `'hours'` | `'days'` | `'years'`

Unit of time, specified as `'seconds'`, `'minutes'`, `'hours'`, `'days'`, or `'years'`. A duration of 1 year is equal to exactly 365.2425 24-hour days.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`ceil` | `fix` | `round`

Topics

“Integers”
“Floating-Point Numbers”

Introduced before R2006a

flow

Simple function of three variables

Syntax

```
v = flow
v = flow(n)
v = flow(x,y,z)
[x,y,z,v] = flow(...)
```

Description

`flow`, a function of three variables, generates fluid-flow data that is useful for demonstrating `slice`, `interp3`, and other functions that visualize scalar volume data.

`v = flow` produces a 25-by-50-by-25 array.

`v = flow(n)` produces a `n`-by-`2n`-by-`n` array.

`v = flow(x,y,z)` evaluates the speed profile at the points `x`, `y`, and `z`.

`[x,y,z,v] = flow(...)` returns the coordinates as well as the volume data.

See Also

`slice` | `interp3`

Topics

"Slicing Fluid Flow Data"

Introduced before R2006a

fmesh

Plot 3-D mesh

Syntax

```
fmesh(f)
fmesh(f,xyinterval)

fmesh(funx,funy,funz)
fmesh(funx,funy,funz,uvinterval)

fmesh(___,LineSpec)
fmesh(___,Name,Value)
fmesh(ax,___)
fs = fmesh(___)
```

Description

`fmesh(f)` creates a mesh plot of the expression `z = f(x,y)` over the default interval `[-5 5]` for `x` and `y`.

`fmesh(f,xyinterval)` plots over the specified interval. To use the same interval for both `x` and `y`, specify `xyinterval` as a two-element vector of the form `[min max]`. To use different intervals, specify a four-element vector of the form `[xmin xmax ymin ymax]`.

`fmesh(funx,funy,funz)` plots the parametric mesh defined by `x = funx(u,v)`, `y = funy(u,v)`, `z = funz(u,v)` over the default interval `[-5 5]` for `u` and `v`.

`fmesh(funx,funy,funz,uvinterval)` plots the parametric mesh over the specified interval. To use the same interval for both `u` and `v`, specify `uvinterval` as a two-element vector of the form `[min max]`. To use different intervals, specify a four-element vector of the form `[umin umax vmin vmax]`.

`fmesh(___,LineSpec)` sets the line style, marker symbol, and color of the mesh. For example, `'-r'` specifies red lines. Use this option after any of the previous input argument combinations.

`fmesh( ___ ,Name,Value)` specifies properties of the mesh using one or more name-value pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

`fmesh(ax, ___ )` plots into the axes specified by `ax` instead of the current axes `gca`.

`fs = fmesh( ___ )` returns a `FunctionSurface` object or a `ParameterizedFunctionSurface` object, depending on the inputs. Use `fs` to query and modify properties of a specific surface. For a list of properties, see FunctionSurface Properties or ParameterizedFunctionSurface Properties.

Examples

3-D Mesh Plot of Expression

Plot a mesh of the input $\sin(x) + \cos(y)$ over the default interval $-5 < x < 5$ and $-5 < y < 5$.

```
fmesh(@(x,y) sin(x)+cos(y))
```

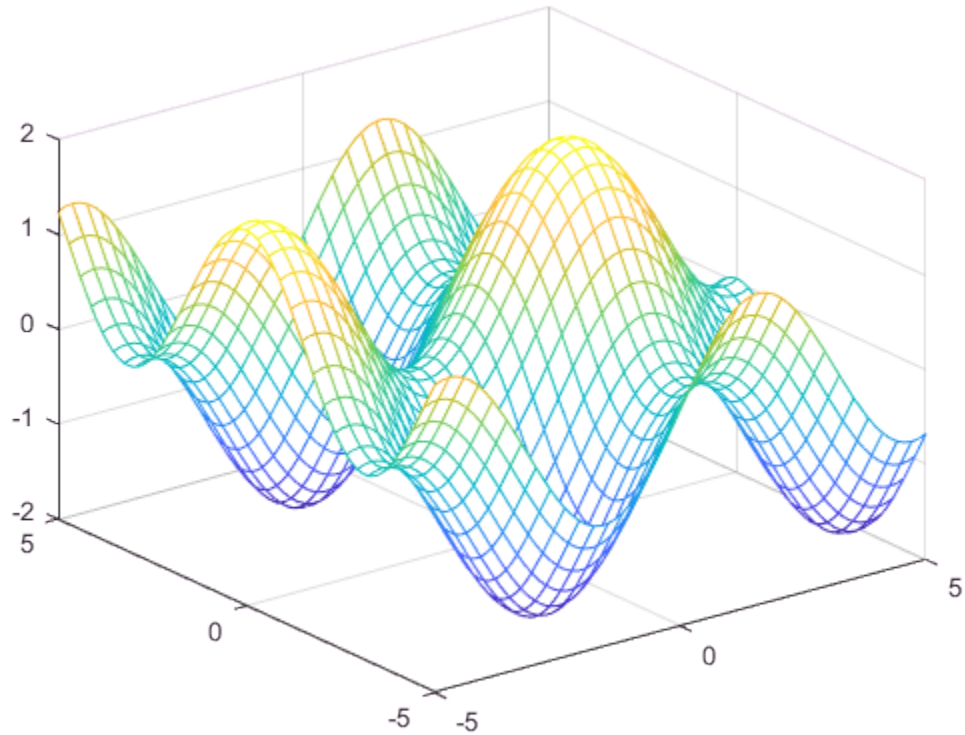

Parameterized Mesh Plot

Plot the parameterized mesh

$$
\begin{aligned}
x &= r\cos(s)\sin(t) \\
y &= r\sin(s)\sin(t) \\
z &= r\cos(t) \\
\text{where} \quad r &= 2 + \sin(7s + 5t)
\end{aligned}
$$

for $0 < s < 2\pi$ and $0 < t < \pi$. Make the mesh partially transparent using `alpha`.

```
r = @(s,t) 2 + sin(7.*s + 5.*t);
x = @(s,t) r(s,t).*cos(s).*sin(t);
y = @(s,t) r(s,t).*sin(s).*sin(t);
z = @(s,t) r(s,t).*cos(t);
fmesh(x,y,z,[0 2*pi 0 pi])
```

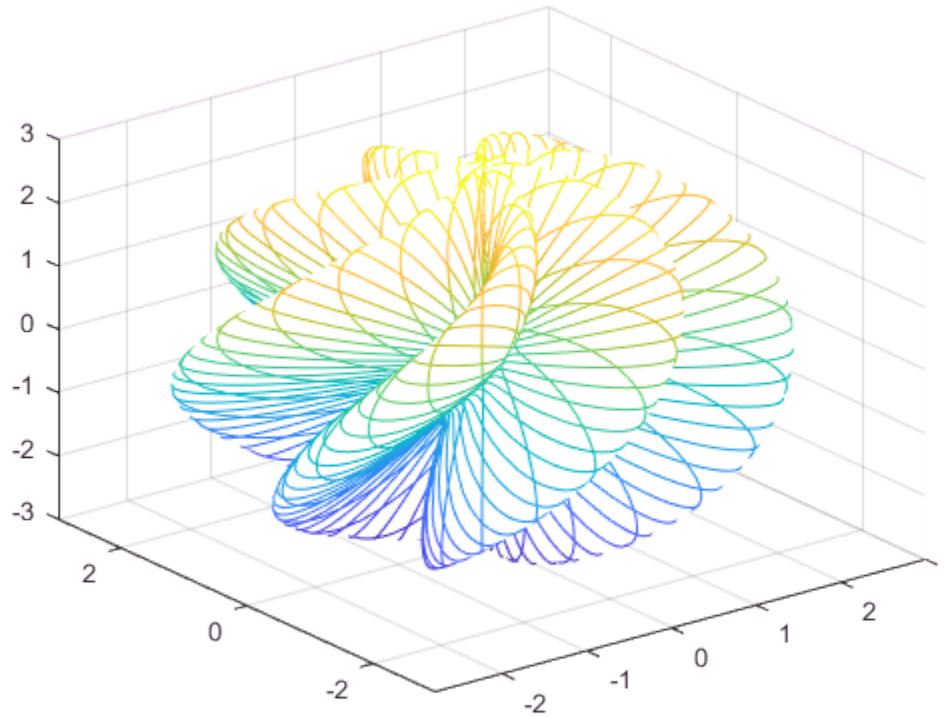


```
alpha(0.8)
```

Specify Interval of Mesh Plot and Plot Piecewise Input

Plot the piecewise input

$$\begin{array}{ll} \mathrm{erf}(x) + \cos(y) & -5 < x < 0 \\ \sin(x) + \cos(y) & 0 < x < 5 \end{array}$$

over the interval $-5 < y < 5$.

Specify the plotting interval as the second argument of `fmesh`. When you plot multiple inputs over different intervals in the same axes, the axis limits adjust to include all the data.

```
fmesh(@(x,y) erf(x)+cos(y),[-5 0 -5 5])
hold on
fmesh(@(x,y) sin(x)+cos(y),[0 5 -5 5])
hold off
```

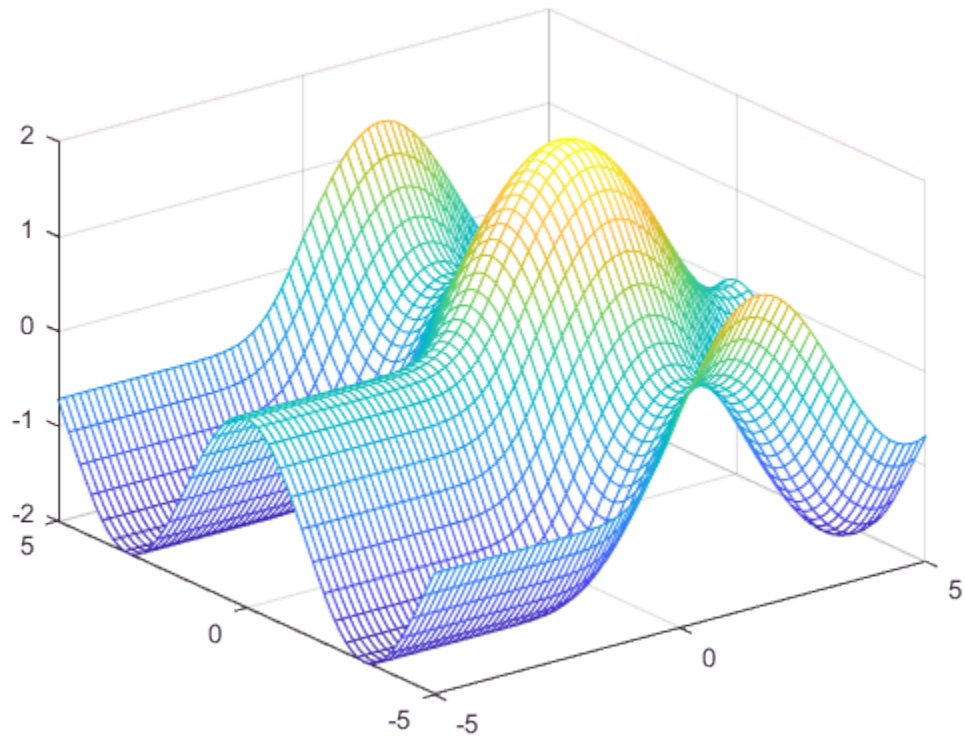

Specify Mesh Plot Properties

Create a mesh plot using red lines.

```
fmesh(@(x,y) sin(x)+cos(y),'EdgeColor','red')
```

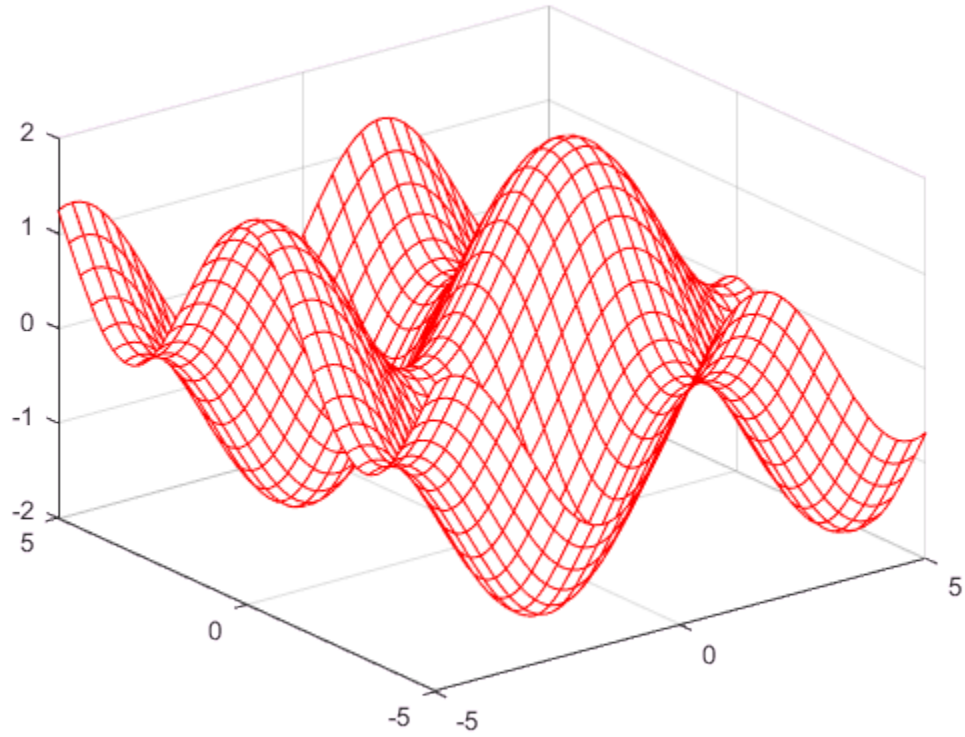

Input Arguments

f — 3-D function to plot
function handle

3-D function to plot, specified as a function handle to a named or anonymous function.

Specify a function of the form `z = f(x,y)`. The function must accept two matrix input arguments and return a matrix output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `f = @(x,y) sin(x) + cos(y);`

`xyinterval` — Plotting interval for `x` and `y`

`[-5 5 -5 5]` (default) | vector of form `[min max]` | vector of form `[xmin xmax ymin ymax]`

Plotting interval for `x` and `y`, specified in one of these forms:

- Vector of form `[min max]` — Use the interval `[min max]` for both `x` and `y`
- Vector of form `[xmin xmax ymin ymax]` — Use the interval `[xmin xmax]` for `x` and `[ymin ymax]` for `y`.

`funx` — Parametric function for *x* coordinates

function handle

Parametric function for *x* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `x = funx(u,v)`. The function must accept two matrix input arguments and return a matrix output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funx = @(u,v) u.*sin(v);`

`funy` — Parametric function for *y* coordinates

function handle

Parametric function for *y* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `y = funy(u,v)`. The function must accept two matrix input arguments and return a matrix output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funy = @(t) @(u,v) -u.*cos(v);`

`funz` — Parametric function for *z* coordinates

function handle

Parametric function for *z* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `z = funz(u,v)`. The function must accept two matrix input arguments and return a matrix output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funz = @(u,v) v;`

`uvinterval` — Plotting interval for `u` and `v`

`[-5 5 -5 5]` (default) | vector of form `[min max]` | vector of form `[umin umax vmin vmax]`

Plotting interval for `u` and `v`, specified in one of these forms:

- Vector of form `[min max]` — Use the interval `[min max]` for both `u` and `v`.
- Vector of form `[umin umax vmin vmax]` — Use the interval `[umin umax]` for `u` and `[vmin vmax]` for `v`.

`ax` — Axes object

axes object

Axes object. If you do not specify an axes object, then `fmesh` uses the current axes.

`LineSpec` — Line specification

character vector

Line specification, specified as a character vector with a line style, marker, and color. The elements of the character vector can appear in any order, and you can omit one or more options. To show only markers with no connecting lines, specify a marker and omit the line style.

Example: `'r--o'` specifies a red color, a dashed line, and circle markers

Line Style Specifier	Description
-	Solid line (default)

Line Style Specifier	Description
`--`	Dashed line
`:`	Dotted line
`-.`	Dash-dot line

Marker Specifier	Description
`o`	Circle
`+`	Plus sign
`*`	Asterisk
`.`	Point
`x`	Cross
`s`	Square
`d`	Diamond
`^`	Upward-pointing triangle
`v`	Downward-pointing triangle
`>`	Right-pointing triangle
`<`	Left-pointing triangle
`p`	Pentagram
`h`	Hexagram

Color Specifier	Description
`y`	yellow
`m`	magenta
`c`	cyan
`r`	red
`g`	green
`b`	blue
`w`	white
`k`	black

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Marker','o','MarkerFaceColor','red'`

The properties listed here are only a subset. For a full list, see FunctionSurface Properties.

`'MeshDensity'` — Number of evaluation points per direction
35 (default) | number

Number of evaluation points per direction, specified as a number. The default is `35`. Because `fmesh` objects use adaptive evaluation, the actual number of evaluation points is greater.

Example: `100`

`'ShowContours'` — Display contour plot under plot
`'off'` (default) | `'on'`

Display contour plot under plot, specified as `'off'` (default) or `'on'`.

`'EdgeColor'` — Line color
`'interp'` (default) | RGB triplet | character vector | `'none'`

Line color, specified as one of these values:

- `'interp'` — Color the edges based on the `ZData` property values.
- `'none'` — Do not draw the edges.
- RGB triplet or a character vector of a color name — Use the same color for all the edges.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

'LineStyle' — Line style

'-' (default) | '--' | ':' | '-.' | 'none'

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
'-'	Solid line	
'--'	Dashed line	
':'	Dotted line	
'-.'	Dash-dotted line	
'none'	No line	No line

'LineWidth' — Line width

0.5 (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: 0.75

'Marker' — Marker symbol

'none' (default) | 'o' | '+' | '*' | '.' | 'x' | 's' | 'd' | ...

Marker symbol, specified as one of the values in this table. By default, a line does not have markers. Add markers at selected points along the line by specifying a marker.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`'MarkerEdgeColor'` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color as specified in the `EdgeColor` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

'MarkerFaceColor' — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color specified in the MarkerEdgeColor property.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]

Long Name	Short Name	RGB Triplet
'black'	'k'	[0 0 0]

Example: [0.3 0.2 0.1]

Example: 'green'

'MarkerSize' — Marker size
6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

Output Arguments

fs — One or more FunctionSurface or ParameterizedFunctionSurface objects
scalar | vector

One or more FunctionSurface or ParameterizedFunctionSurface objects, returned as a scalar or a vector.

- If you use the fmesh(f) syntax or a variation of this syntax, then fmesh returns FunctionSurface objects.
- If you use the fmesh(funx,funy,funz) syntax or a variation of this syntax, then fmesh returns ParameterizedFunctionSurface objects.

You can use these objects to query and modify properties of a specific mesh. For a list of properties, see FunctionSurface Properties and ParameterizedFunctionSurface Properties.

See Also

See Also

Functions
fcontour | fplot | fplot3 | fsurf

Properties

FunctionSurface Properties | ParameterizedFunctionSurface Properties

Introduced in R2016a

fminbnd

Find minimum of single-variable function on fixed interval

`fminbnd` is a one-dimensional minimizer that finds a minimum for a problem specified by

$$\min_x f(x) \text{ such that } x_1 < x < x_2.$$

x, x_1, and x_2 are finite scalars, and $f(x)$ is a function that returns a scalar.

Syntax

```
x = fminbnd(fun,x1,x2)
x = fminbnd(fun,x1,x2,options)
x = fminbnd(problem)
[x,fval] = fminbnd( ___ )
[x,fval,exitflag] = fminbnd( ___ )
[x,fval,exitflag,output] = fminbnd( ___ )
```

Description

`x = fminbnd(fun,x1,x2)` returns a value `x` that is a local minimizer of the scalar valued function that is described in `fun` in the interval `x1 < x < x2`.

`x = fminbnd(fun,x1,x2,options)` minimizes with the optimization options specified in `options`. Use `optimset` to set these options.

`x = fminbnd(problem)` finds the minimum for `problem`, where `problem` is a structure.

`[x,fval] = fminbnd( ___ )`, for any input arguments, returns the value of the objective function computed in `fun` at the solution `x`.

`[x,fval,exitflag] = fminbnd( ___ )` additionally returns a value `exitflag` that describes the exit condition.

`[x,fval,exitflag,output] = fminbnd( ___ )` additionally returns a structure `output` that contains information about the optimization.

Examples

Minimum of sin

Find the point where the $\sin(x)$ function takes its minimum in the range $0 < x < 2\pi$.

```
fun = @sin;
x1 = 0;
x2 = 2*pi;
x = fminbnd(fun,x1,x2)
```

```
x = 4.7124
```

To display precision, this is the same as the correct value $x = 3\pi/2$.

```
3*pi/2
```

```
ans = 4.7124
```

Minimize a Function Specified by a File

Minimize a function that is specified by a separate function file. A function accepts a point `x` and returns a real scalar representing the value of the objective function at `x`.

Write the following function as a file, and save the file as `scalarobjective.m` on your MATLAB® path.

```
function f = scalarobjective(x)
f = 0;
for k = -10:10
    f = f + (k+1)^2*cos(k*x)*exp(-k^2/2);
end
```

Find the `x` that minimzes `scalarobjective` on the interval 1 <= `x` <= 3.

```
x = fminbnd(@scalarobjective,1,3)
```

```
x =

    2.0061
```

Minimize with Extra Parameter

Minimize a function when there is an extra parameter. The function $\sin(x-a)$ has a minimum that depends on the value of the parameter a. Create an anonymous function of x that includes the value of the parameter a. Minimize this function over the interval $0 < x < 2\pi$.

```
a = 9/7;
fun = @(x)sin(x-a);
x = fminbnd(fun,1,2*pi)
```

```
x = 5.9981
```

This answer is correct; the theoretical value is

```
3*pi/2 + 9/7
```

```
ans = 5.9981
```

For more information about including extra parameters, see “Parameterizing Functions”.

Monitor Iterations

Monitor the steps `fminbnd` takes to minimize the $\sin(x)$ function for $0 < x < 2\pi$.

```
fun = @sin;
x1 = 0;
x2 = 2*pi;
options = optimset('Display','iter');
x = fminbnd(fun,x1,x2,options)
```

```
 Func-count     x          f(x)         Procedure
    1        2.39996      0.67549        initial
    2        3.88322     -0.67549        golden
    3        4.79993    -0.996171        golden
    4        5.08984    -0.929607        parabolic
    5        4.70582    -0.999978        parabolic
    6         4.7118           -1        parabolic
    7        4.71239           -1        parabolic
```

```
    8        4.71236           -1        parabolic
    9        4.71242           -1        parabolic

Optimization terminated:
 the current x satisfies the termination criteria using OPTIONS.TolX of 1.000000e-04

x = 4.7124
```

Find Minimum Location and Function Value

Find the location of the minimum of $\sin(x)$ and the value of the minimum for $0 < x < 2\pi$.

```
fun = @sin;
[x,fval] = fminbnd(fun,1,2*pi)
```

```
x = 4.7124

fval = -1.0000
```

Obtain All Information

Return all information about the `fminbnd` solution process by requesting all outputs. Also, monitor the solution process using a plot function.

```
fun = @sin;
x1 = 0;
x2 = 2*pi;
options = optimset('PlotFcns',@optimplotfval);
[x,fval,exitflag,output] = fminbnd(fun,x1,x2,options)
```

```
x = 4.7124

fval = -1.0000

exitflag = 1

output = struct with fields:
    iterations: 8
     funcCount: 9
     algorithm: 'golden section search, parabolic interpolation'
       message: 'Optimization terminated:...'
```

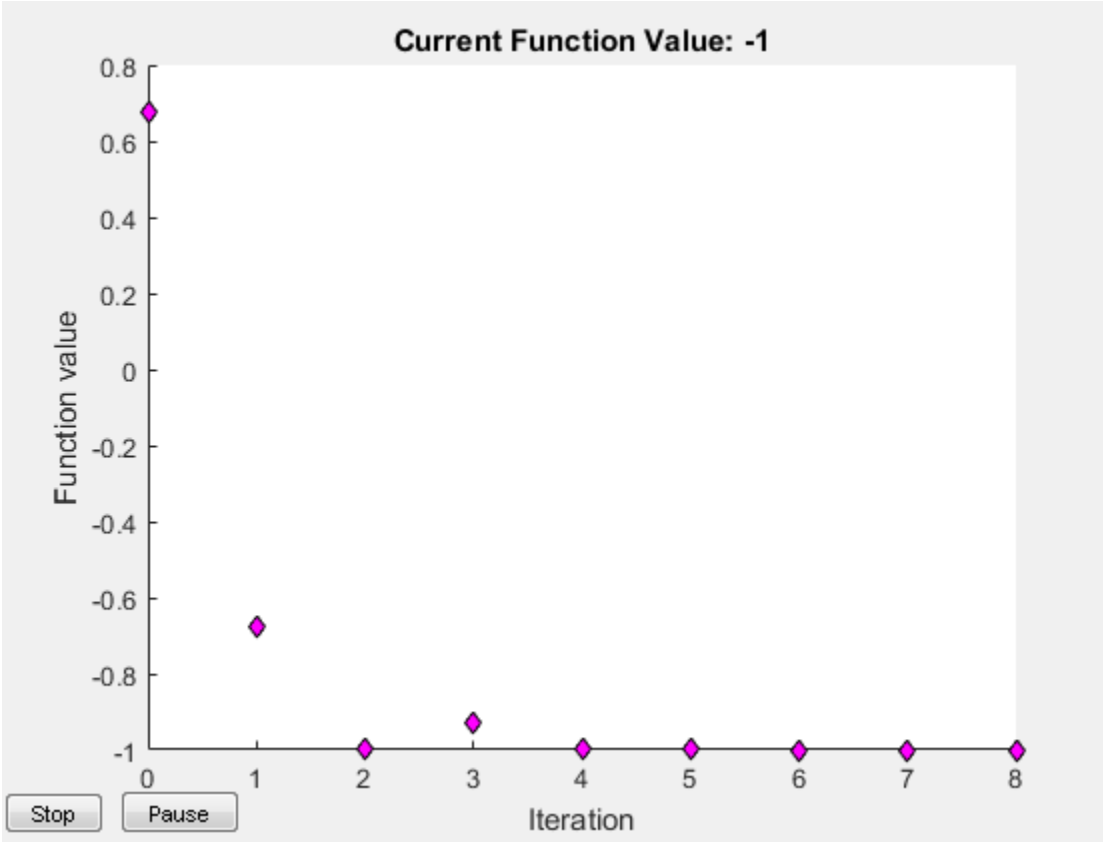

- "Minimizing Functions of One Variable"

Input Arguments

`fun` — Function to minimize

function handle | function name

Function to minimize, specified as a function handle or function name. `fun` is a function that accepts a real scalar `x` and returns a real scalar `f` (the objective function evaluated at `x`).

Specify `fun` as a function handle for a file:

```
x = fminbnd(@myfun,x1,x2)
```

where `myfun` is a MATLAB function such as

```
function f = myfun(x)
f = ...            % Compute function value at x
```

You can also specify `fun` as a function handle for an anonymous function:

```
x = fminbnd(@(x)norm(x)^2,x1,x2);
```

Example: `fun = @(x)-x*exp(-3*x)`

Data Types: `char` | `function_handle` | `string`

x1 — Lower bound

real scalar

Lower bound, specified as a real scalar.

Example: `x1 = -3`

Data Types: `double`

x2 — Upper bound

real scalar

Upper bound, specified as a real scalar.

Example: `x2 = 5`

Data Types: `double`

options — Optimization options

structure such as `optimset` returns

Optimization options, specified as a structure such as `optimset` returns. You can use `optimset` to set or change the values of these fields in the options structure. See "Set Options" for detailed information.

`Display`	Level of display (see "Iterative Display"): • `'notify'` (default) displays output only if the function does not converge. • `'off'` or `'none'` displays no output.

	• `'iter'` displays output at each iteration. • `'final'` displays just the final output.
`FunValCheck`	Check whether objective function values are valid. The default `'off'` allows `fminbnd` to proceed when the objective function returns a value that is `complex` or `NaN`. The `'on'` setting throws an error when the objective function returns a value that is `complex` or `NaN`.
`MaxFunEvals`	Maximum number of function evaluations allowed, a positive integer. The default is `500`. See "Tolerances and Stopping Criteria".
`MaxIter`	Maximum number of iterations allowed, a positive integer. The default is `500`. See "Tolerances and Stopping Criteria".
`OutputFcn`	Specify one or more user-defined functions that an optimization function calls at each iteration, either as a function handle or as a cell array of function handles. The default is none (`[ ]`). See "Output Functions".
`PlotFcns`	Plots various measures of progress while the algorithm executes, select from predefined plots or write your own. Pass a function handle or a cell array of function handles. The default is none (`[ ]`). • `@optimplotx` plots the current point • `@optimplotfunccount` plots the function count • `@optimplotfval` plots the function value For information on writing a custom plot function, see "Plot Functions".
`TolX`	Termination tolerance on `x`, a positive scalar. The default is `1e-4`. See "Tolerances and Stopping Criteria".

Example: `options = optimset('Display','iter')`

Data Types: `struct`

`problem` — Problem structure
structure

Problem structure, specified as a structure with the following fields.

Field Name	Entry
`objective`	Objective function
`x1`	Left endpoint
`x2`	Right endpoint
`solver`	`'fminbnd'`
`options`	Options structure such as returned by `optimset`

The simplest way to obtain a `problem` structure is to export the problem from the Optimization app.

Data Types: `struct`

Output Arguments

`x` — Solution

real scalar

Solution, returned as a real scalar. Typically, `x` is a local solution to the problem when `exitflag` is positive.

`fval` — Objective function value at solution

real number

Objective function value at the solution, returned as a real number. Generally, `fval` = `fun(x)`.

`exitflag` — Reason `fminbnd` stopped

integer

Reason `fminbnd` stopped, returned as an integer.

`1`	Function converged to a solution `x`.
`0`	Number of iterations exceeded `options.MaxIter` or number of function evaluations exceeded `options.MaxFunEvals`.
`-1`	Stopped by an output function or plot function.
`-2`	The bounds are inconsistent, meaning `x1 > x2`.

`output` — Information about the optimization process
structure

Information about the optimization process, returned as a structure with fields:

`iterations`	Number of iterations taken
`funcCount`	Number of function evaluations
`algorithm`	`'golden section search, parabolic interpolation'`
`message`	Exit message

Limitations

- The function to be minimized must be continuous.
- `fminbnd` might only give local solutions.
- `fminbnd` can exhibit slow convergence when the solution is on a boundary of the interval.

Algorithms

`fminbnd` is a function file. The algorithm is based on golden section search and parabolic interpolation. Unless the left endpoint x_1 is very close to the right endpoint x_2, `fminbnd` never evaluates `fun` at the endpoints, so `fun` need only be defined for x in the interval $x_1 < x < x_2$.

If the minimum actually occurs at x_1 or x_2, `fminbnd` returns a point `x` in the interior of the interval (x_1,x_2) that is close to the minimizer. In this case, the distance of `x` from the minimizer is no more than `2*(TolX + 3*abs(x)*sqrt(eps))`. See [1] or [2] for details about the algorithm.

References

[1] Forsythe, G. E., M. A. Malcolm, and C. B. Moler. *Computer Methods for Mathematical Computations*. Englewood Cliffs, NJ: Prentice Hall, 1976.

[2] Brent, Richard. P. *Algorithms for Minimization without Derivatives*. Englewood Cliffs, NJ: Prentice-Hall, 1973.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

For C/C++ code generation:

- `fminbnd` does not support the problem structure argument.
- `fminbnd` ignores the `Display` option and does not give iterative display or an exit message. To check solution quality, examine the exit flag.
- The output structure does not include the `algorithm` or `message` fields.
- `fminbnd` ignores the `OutputFcn` and `PlotFcns` options.

See Also

See Also

`fminsearch` | `fzero` | `optimset`

Topics

"Minimizing Functions of One Variable"
"Create Function Handle"
"Anonymous Functions"

Introduced before R2006a

fminsearch

Find minimum of unconstrained multivariable function using derivative-free method

Nonlinear programming solver that searches for the minimum of a problem specified by

$$\min_{x} f(x)$$

$f(x)$ is a function that returns a scalar, and x is a vector or a matrix.

Syntax

```
x = fminsearch(fun,x0)
x = fminsearch(fun,x0,options)
x = fminsearch(problem)
[x,fval] = fminsearch( ___ )
[x,fval,exitflag] = fminsearch( ___ )
[x,fval,exitflag,output] = fminsearch( ___ )
```

Description

`x = fminsearch(fun,x0)` starts at the point `x0` and attempts to find a local minimum `x` of the function described in `fun`.

`x = fminsearch(fun,x0,options)` minimizes with the optimization options specified in the structure `options`. Use `optimset` to set these options.

`x = fminsearch(problem)` finds the minimum for `problem`, where `problem` is a structure.

`[x,fval] = fminsearch( ___ )`, for any previous input syntax, returns in `fval` the value of the objective function `fun` at the solution `x`.

`[x,fval,exitflag] = fminsearch( ___ )` additionally returns a value `exitflag` that describes the exit condition.

`[x,fval,exitflag,output] = fminsearch( ___ )` additionally returns a structure `output` with information about the optimization process.

Examples

Minimize Rosenbrock's Function

Minimize Rosenbrock's function, a notoriously difficult optimization problem for many algorithms:

$$f(x) = 100(x_2 - x_1^2)^2 + (1 - x_1)^2.$$

The function is minimized at the point `x = [1,1]` with minimum value `0`.

Set the start point to `x0 = [-1.2,1]` and minimize Rosenbrock's function using `fminsearch`.

```
fun = @(x)100*(x(2) - x(1)^2)^2 + (1 - x(1))^2;
x0 = [-1.2,1];
x = fminsearch(fun,x0)
```

```
x =

    1.0000    1.0000
```

Monitor Optimization Process

Set options to monitor the process as `fminsearch` attempts to locate a minimum.

Set options to plot the objective function at each iteration.

```
options = optimset('PlotFcns',@optimplotfval);
```

Set the objective function to Rosenbrock's function,

$$f(x) = 100(x_2 - x_1^2)^2 + (1 - x_1)^2.$$

The function is minimized at the point `x = [1,1]` with minimum value `0`.

Set the start point to `x0 = [-1.2,1]` and minimize Rosenbrock's function using `fminsearch`.

```
fun = @(x)100*(x(2) - x(1)^2)^2 + (1 - x(1))^2;
x0 = [-1.2,1];
x = fminsearch(fun,x0,options)
```

```
x =

    1.0000    1.0000
```

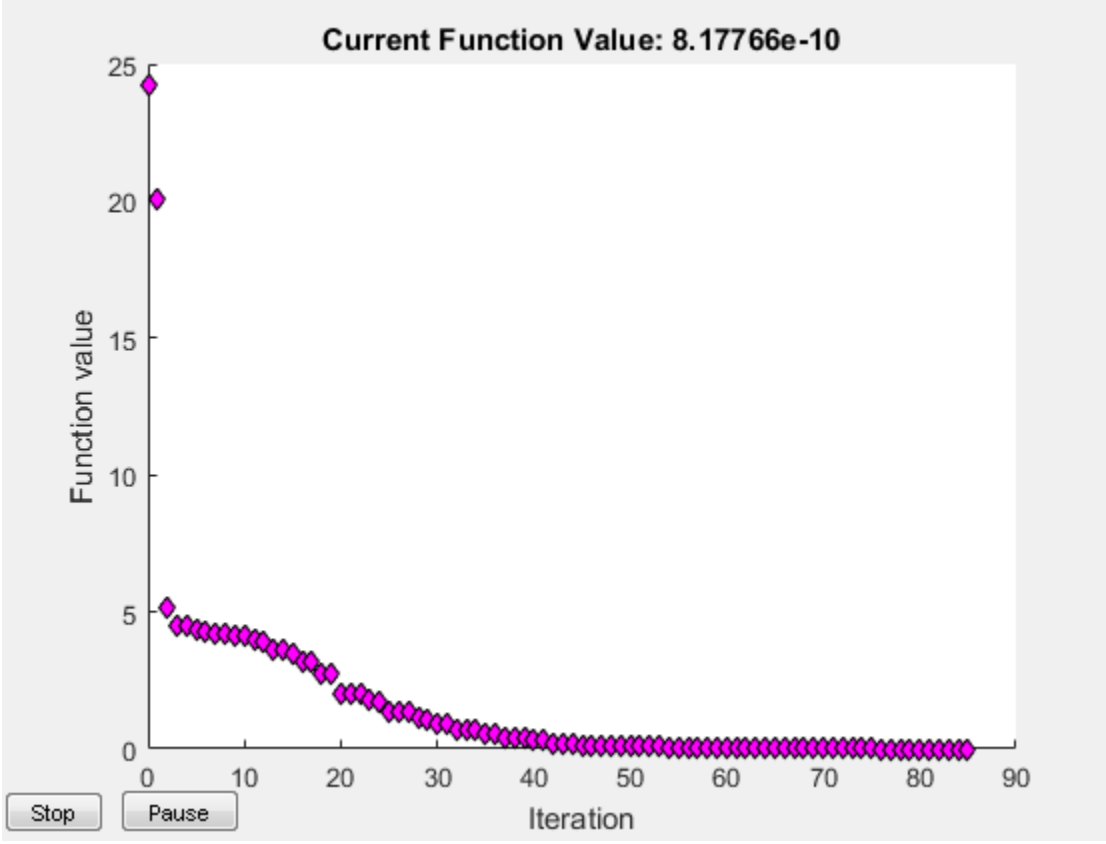

Minimize a Function Specified by a File

Minimize an objective function whose values are given by executing a file. A function file must accept a real vector `x` and return a real scalar that is the value of the objective function.

Copy the following code and include it as a file named `objectivefcn1.m` on your MATLAB® path.

```
function f = objectivefcn1(x)
f = 0;
for k = -10:10
    f = f + exp(-(x(1)-x(2))^2 - 2*x(1)^2)*cos(x(2))*sin(2*x(2));
end
```

Start at `x0 = [0.25,-0.25]` and search for a minimum of `objectivefcn`.

```
x0 = [0.25,-0.25];
x = fminsearch(@objectivefcn1,x0)
```

```
x =

   -0.1696   -0.5086
```

Minimize with Extra Parameters

Sometimes your objective function has extra parameters. These parameters are not variables to optimize, they are fixed values during the optimization. For example, suppose that you have a parameter `a` in the Rosenbrock-type function

$$f(x,a) = 100(x_2 - x_1^2)^2 + (a - x_1)^2.$$

This function has a minimum value of 0 at $x_1 = a$, $x_2 = a^2$. If, for example, $a = 3$, you can include the parameter in your objective function by creating an anonymous function.

Create the objective function with its extra parameters as extra arguments.

```
f = @(x,a)100*(x(2) - x(1)^2)^2 + (a-x(1))^2;
```

Put the parameter in your MATLAB® workspace.

```
a = 3;
```

Create an anonymous function of `x` alone that includes the workspace value of the parameter.

```
fun = @(x)f(x,a);
```

Solve the problem starting at `x0 = [-1,1.9]`.

```
x0 = [-1,1.9];
x = fminsearch(fun,x0)
```

```
x =

    3.0000    9.0000
```

For more information about using extra parameters in your objective function, see "Parameterizing Functions".

Find Minimum Location and Value

Find both the location and value of a minimum of an objective function using `fminsearch`.

Write an anonymous objective function for a three-variable problem.

```
x0 = [1,2,3];
fun = @(x)-norm(x+x0)^2*exp(-norm(x-x0)^2 + sum(x));
```

Find the minimum of `fun` starting at `x0`. Find the value of the minimum as well.

```
[x,fval] = fminsearch(fun,x0)
```

```
x =

    1.5359    2.5645    3.5932


fval = -5.9565e+04
```

Inspect Optimization Process

Inspect the results of an optimization, both while it is running and after it finishes.

Set options to provide iterative display, which gives information on the optimization as the solver runs. Also, set a plot function to show the objective function value as the solver runs.

```
options = optimset('Display','iter','PlotFcns',@optimplotfval);
```

Set an objective function and start point.

```
function f = objectivefcn1(x)
```

```
f = 0;
for k = -10:10
    f = f + exp(-(x(1)-x(2))^2 - 2*x(1)^2)*cos(x(2))*sin(2*x(2));
end
```

Include the code for `objectivefcn1` as a file on your MATLAB® path.

```
x0 = [0.25,-0.25];
fun = @objectivefcn1;
```

Obtain all solver outputs. Use these outputs to inspect the results after the solver finishes.

```
[x,fval,exitflag,output] = fminsearch(fun,x0,options)
```

```
 Iteration   Func-count     min f(x)         Procedure
     0            1         -6.70447
     1            3         -6.89837         initial simplex
     2            5         -7.34101         expand
     3            7         -7.91894         expand
     4            9         -9.07939         expand
     5           11         -10.5047         expand
     6           13         -12.4957         expand
     7           15         -12.6957         reflect
     8           17         -12.8052         contract outside
     9           19         -12.8052         contract inside
    10           21         -13.0189         expand
    11           23         -13.0189         contract inside
    12           25         -13.0374         reflect
    13           27          -13.122         reflect
    14           28          -13.122         reflect
    15           29          -13.122         reflect
    16           31          -13.122         contract outside
    17           33         -13.1279         contract inside
    18           35         -13.1279         contract inside
    19           37         -13.1296         contract inside
    20           39         -13.1301         contract inside
    21           41         -13.1305         reflect
    22           43         -13.1306         contract inside
    23           45         -13.1309         contract inside
    24           47         -13.1309         contract inside
    25           49          -13.131         reflect
    26           51          -13.131         contract inside
```

```
    27           53          -13.131         contract inside
    28           55          -13.131         contract inside
    29           57          -13.131         contract outside
    30           59          -13.131         contract inside
    31           61          -13.131         contract inside
    32           63          -13.131         contract inside
    33           65          -13.131         contract outside
    34           67          -13.131         contract inside
    35           69          -13.131         contract inside

Optimization terminated:
 the current x satisfies the termination criteria using OPTIONS.TolX of 1.000000e-04
 and F(X) satisfies the convergence criteria using OPTIONS.TolFun of 1.000000e-04


x =

   -0.1696   -0.5086


fval =

  -13.1310


exitflag =

     1


output =

  struct with fields:

    iterations: 35
     funcCount: 69
     algorithm: 'Nelder-Mead simplex direct search'
       message: 'Optimization terminated:...'
```

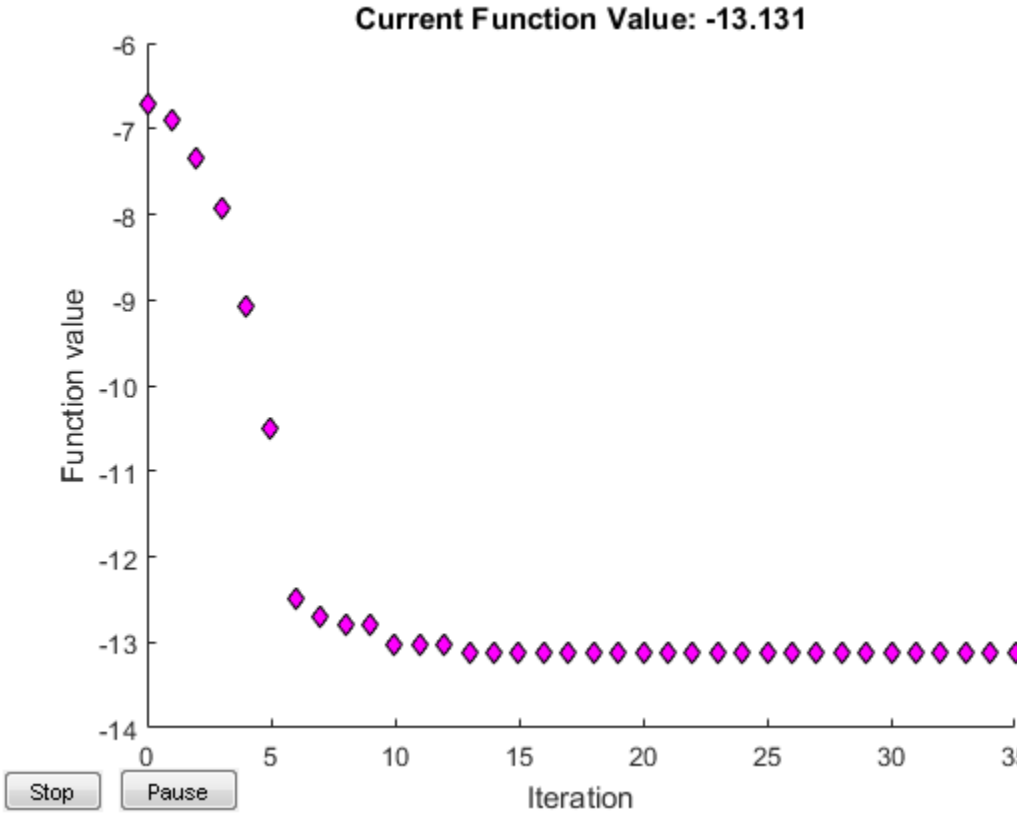

The value of `exitflag` is `1`, meaning `fminsearch` likely converged to a local minimum.

The `output` structure shows the number of iterations. The iterative display and the plot show this information as well. The `output` structure also shows the number of function evaluations, which the iterative display shows, but the chosen plot function does not.

- "Minimizing Functions of Several Variables"
- "Curve Fitting via Optimization"

Input Arguments

fun — Function to minimize

function handle | function name

Function to minimize, specified as a function handle or function name. fun is a function that accepts a vector or array x and returns a real scalar f (the objective function evaluated at x).

Specify fun as a function handle for a file:

```
x = fminsearch(@myfun,x0)
```

where myfun is a MATLAB function such as

```
function f = myfun(x)
f = ...            % Compute function value at x
```

You can also specify fun as a function handle for an anonymous function:

```
x = fminsearch(@(x)norm(x)^2,x0);
```

Example: fun = @(x)-x*exp(-3*x)

Data Types: char | function_handle | string

x0 — Initial point

real vector | real array

Initial point, specified as a real vector or real array. Solvers use the number of elements in, and size of, x0 to determine the number and size of variables that fun accepts.

Example: x0 = [1,2,3,4]

Data Types: double

options — Optimization options

structure such as optimset returns

Optimization options, specified as a structure such as optimset returns. You can use optimset to set or change the values of these fields in the options structure. See "Set Options" for detailed information.

Display	Level of display (see "Iterative Display"):

- `'notify'` (default) displays output only if the function does not converge.
- `'final'` displays just the final output.
- `'off'` or `'none'` displays no output.
- `'iter'` displays output at each iteration.

`FunValCheck`

Check whether objective function values are valid. `'on'` displays an error when the objective function returns a value that is `complex` or `NaN`. The default `'off'` displays no error.

`MaxFunEvals`

Maximum number of function evaluations allowed, a positive integer. The default is `200*numberOfVariables`. See "Tolerances and Stopping Criteria".

`MaxIter`

Maximum number of iterations allowed, a positive integer. The default value is `200*numberOfVariables`. See "Tolerances and Stopping Criteria".

`OutputFcn`

Specify one or more user-defined functions that an optimization function calls at each iteration, either as a function handle or as a cell array of function handles. The default is none (`[ ]`). See "Output Functions".

`PlotFcns`

Plots various measures of progress while the algorithm executes. Select from predefined plots or write your own. Pass a function handle or a cell array of function handles. The default is none (`[ ]`):

- `@optimplotx` plots the current point.
- `@optimplotfunccount` plots the function count.
- `@optimplotfval` plots the function value.

For information on writing a custom plot function, see "Plot Functions".

`TolFun`

Termination tolerance on the function value, a positive scalar. The default is `1e-4`. See "Tolerances and Stopping Criteria". Unlike other solvers, `fminsearch` stops when it satisfies *both* `TolFun` and `TolX`.

`TolX`	Termination tolerance on `x`, a positive scalar. The default value is `1e-4`. See "Tolerances and Stopping Criteria". Unlike other solvers, `fminsearch` stops when it satisfies *both* `TolFun` and `TolX`.

Example: `options = optimset('Display','iter')`

Data Types: `struct`

`problem` — Problem structure
structure

Problem structure, specified as a structure with the following fields.

Field Name	Entry
`objective`	Objective function
`x0`	Initial point for `x`
`solver`	`'fminsearch'`
`options`	Options structure such as returned by `optimset`

Data Types: `struct`

Output Arguments

`x` — Solution
real vector | real array

Solution, returned as a real vector or real array. The size of `x` is the same as the size of `x0`. Typically, `x` is a local solution to the problem when `exitflag` is positive.

`fval` — Objective function value at solution
real number

Objective function value at the solution, returned as a real number. Generally, `fval = fun(x)`.

`exitflag` — Reason `fminsearch` stopped
integer

Reason `fminsearch` stopped, returned as an integer.

`1`	The function converged to a solution `x`.
`0`	Number of iterations exceeded `options.MaxIter` or number of function evaluations exceeded `options.MaxFunEvals`.
`-1`	The algorithm was terminated by the output function.

`output` — Information about the optimization process
structure

Information about the optimization process, returned as a structure with fields:

`iterations`	Number of iterations
`funcCount`	Number of function evaluations
`algorithm`	`'Nelder-Mead simplex direct search'`
`message`	Exit message

Tips

- `fminsearch` only minimizes over the real numbers, that is, the vector or array x must only consist of real numbers and $f(x)$ must only return real numbers. When x has complex values, split x into real and imaginary parts.
- Use `fminsearch` to solve nondifferentiable problems or problems with discontinuities, particularly if no discontinuity occurs near the solution.

Algorithms

`fminsearch` uses the simplex search method of Lagarias et al. [1]. This is a direct search method that does not use numerical or analytic gradients as in `fminunc`. The algorithm is described in detail in “fminsearch Algorithm”. The algorithm is not guaranteed to converge to a local minimum.

References

[1] Lagarias, J. C., J. A. Reeds, M. H. Wright, and P. E. Wright. "Convergence Properties of the Nelder-Mead Simplex Method in Low Dimensions." *SIAM Journal of Optimization*. Vol. 9, Number 1, 1998, pp. 112–147.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

For C/C++ code generation:

- `fminsearch` ignores the `Display` option and does not give iterative display or an exit message. To check solution quality, examine the exit flag.
- The output structure does not include the `algorithm` or `message` fields.
- `fminsearch` ignores the `OutputFcn` and `PlotFcns` options.

See Also

See Also

`fminbnd` | `optimset`

Topics

"Minimizing Functions of Several Variables"
"Curve Fitting via Optimization"
"Create Function Handle"
"Anonymous Functions"

Introduced before R2006a

fopen

Open file, or obtain information about open files

Syntax

```
fileID = fopen(filename)
fileID = fopen(filename,permission)
fileID = fopen(filename,permission,machinefmt,encodingIn)
[fileID,errmsg] = fopen( ___ )

fIDs = fopen('all')

filename = fopen(fileID)
[filename,permission,machinefmt,encodingOut] = fopen(fileID)
```

Description

`fileID = fopen(filename)` opens the file, `filename`, for binary read access, and returns an integer file identifier equal to or greater than 3. MATLAB reserves file identifiers `0`, `1`, and `2` for standard input, standard output (the screen), and standard error, respectively.

If `fopen` cannot open the file, then `fileID` is `-1`.

`fileID = fopen(filename,permission)` opens the file with the type of access specified by `permission`.

`fileID = fopen(filename,permission,machinefmt,encodingIn)` additionally specifies the order for reading or writing bytes or bits in the file using the `machinefmt` argument. The optional `encodingIn` argument specifies the character encoding scheme associated with the file.

`[fileID,errmsg] = fopen( ___ )` additionally returns a system-dependent error message if `fopen` fails to open the file. Otherwise, `errmsg` is an empty character vector. You can use this syntax with any of the input arguments of the previous syntaxes.

`fIDs = fopen('all')` returns a row vector containing the file identifiers of all open files. The identifiers reserved for standard input, output, and error are not included. The number of elements in the vector is equal to the number of open files.

`filename = fopen(fileID)` returns the file name that a previous call to `fopen` used when it opened the file specified by `fileID`. The output filename is resolved to the full path. The `fopen` function does not read information from the file to determine the output value.

`[filename,permission,machinefmt,encodingOut] = fopen(fileID)` additionally returns the permission, machine format, and encoding that a previous call to `fopen` used when it opened the specified file. If the file was opened in binary mode, `permission` includes the letter `'b'`. The `encodingOut` output is a standard encoding scheme name. `fopen` does not read information from the file to determine these output values. An invalid `fileID` returns empty character vectors for all output arguments.

Examples

Open File and Pass Identifier to File I/O Function

Open a file and pass the file identifier to the `fgetl` function to read data.

Open the file, `airfoil.m`, and obtain the file identifier.

```
fileID = fopen('airfoil.m');
```

Pass the `fileID` to the `fgetl` function to read one line from the file. Then, close the file.

```
tline = fgetl(fileID);
fclose(fileID)
```

Request Name of File to Open

Create a prompt to request the name of a file to open. If `fopen` cannot open the file, display the relevant error message.

```
fileID = -1;
errmsg = '';
while fileID < 0
   disp(errmsg);
   filename = input('Open file: ', 's');
   [fileID,errmsg] = fopen(filename);
```

```
end
```

Open File for Writing and Specify Access Type, Writing Order, Character Encoding

Open a file to write to a file using the Shift-JIS character encoding.

```
fileID = fopen('japanese_out.txt','w','n','Shift_JIS');
```

The `'w'` input specifies write access, the `'n'` input specifies native byte ordering, and `'Shift_JIS'` specifies the character encoding scheme.

Get Information About Open Files

Suppose you previously opened a file using `fopen`.

```
fileID = fopen('airfoil.m');
```

Get the file identifiers of all open files.

```
fIDs = fopen('all')
```

```
fIDs =

     3
```

Get the file name and character encoding for the open file. Use ~ in place of output arguments you want to omit.

```
[filename,~,~,encoding] = fopen(3)
```

```
filename =

matlabroot\toolbox\matlab\demos\airfoil.m


encoding =

windows-1252
```

The output shown here is representative. Your results might differ.

Input Arguments

`filename` — Name of file to open
character vector or string scalar

Name of the file to open, including the file extension, specified as a character row vector or a string scalar. If the file is not in the current folder, `filename` must include a full or a relative path.

On UNIX systems, if `filename` begins with `'~/'` or `'~username/'`, the `fopen` function expands the path to the current or specified user's home directory, respectively.

- If you open a file with read access and the file is not in the current folder, then `fopen` searches along the MATLAB search path.
- If you open a file with write or append access and the file is not in the current folder, then `fopen` creates a file in the current directory.

Example: `'myFile.txt'`

Data Types: `char` | `string`

`permission` — File access type
`'r'` (default) | `'w'` | `'a'` | `'r+'` | `'w+'` | `'a+'` | `'A'` | `'W'` | ...

File access type, specified as a character vector or a string scalar. You can open a file in binary mode or in text mode. On UNIX systems, both translation modes have the same effect. To open a file in binary mode, specify one of the following.

`'r'`	Open file for reading.
`'w'`	Open or create new file for writing. Discard existing contents, if any.
`'a'`	Open or create new file for writing. Append data to the end of the file.
`'r+'`	Open file for reading and writing.
`'w+'`	Open or create new file for reading and writing. Discard existing contents, if any.
`'a+'`	Open or create new file for reading and writing. Append data to the end of the file.
`'A'`	Open file for appending without automatic flushing of the current output buffer.
`'W'`	Open file for writing without automatic flushing of the current output buffer.

To open files in text mode, attach the letter `'t'` to the `permission` argument, such as `'rt'` or `'wt+'`.

On Windows systems, in text mode:

- Read operations that encounter a carriage return followed by a newline character (`'\r\n'`) remove the carriage return from the input.
- Write operations insert a carriage return before any newline character in the output.

Open or create a new file in text mode if you want to write to it in MATLAB and then open it in Microsoft Notepad, or any text editor that does not recognize `'\n'` as a newline sequence. When writing to the file, end each line with `'\r\n'`. For an example, see `fprintf`. Otherwise, open files in binary mode for better performance.

To read and write to the same file:

- Open the file with a value for `permission` that includes a plus sign, `'+'`.
- Call `fseek` or `frewind` between read and write operations. For example, do not call `fread` followed by `fwrite`, or `fwrite` followed by `fread`, unless you call `fseek` or `frewind` between them.

Data Types: `char` | `string`

`machinefmt` — Order for reading or writing bytes or bits

`'n'` (default) | `'b'` | `'l'` | `'s'` | `'a'` | ...

Order for reading or writing bytes or bits in the file, specified as one of the following character vectors or string scalars.

`'n'` or `'native'`	Your system byte ordering (default)
`'b'` or `'ieee-be'`	Big-endian ordering
`'l'` or `'ieee-le'`	Little-endian ordering
`'s'` or `'ieee-be.l64'`	Big-endian ordering, 64-bit long data type
`'a'` or `'ieee-le.l64'`	Little-endian ordering, 64-bit long data type

By default, all currently supported platforms use little-endian ordering for new files. Existing binary files can use either big-endian or little-endian ordering.

Data Types: `char` | `string`

`encodingIn` — Character encoding

`'UTF-8'` | `'ISO-8859-1'` | `'windows-1251'` | `'windows-1252'` | ...

Character encoding to use for subsequent read and write operations, including `fscanf`, `fprintf`, `fgetl`, `fgets`, `fread`, and `fwrite`, specified as a character vector or a string scalar. The character vector or string scalar must contain a standard character encoding scheme name such as the following.

'Big5'	'ISO-8859-1'	'windows-847'
'Big5-HKSCS'	'ISO-8859-2'	'windows-949'
'CP949'	'ISO-8859-3'	'windows-1250'
'EUC-KR'	'ISO-8859-4'	'windows-1251'
'EUC-JP'	'ISO-8859-5'	'windows-1252'
'EUC-TW'	'ISO-8859-6'	'windows-1253'
'GB18030'	'ISO-8859-7'	'windows-1254'
'GB2312'	'ISO-8859-8'	'windows-1255'
'GBK'	'ISO-8859-9'	'windows-1256'
'IBM866'	'ISO-8859-11'	'windows-1257'
'KOI8-R'	'ISO-8859-13'	'windows-1258'
'KOI8-U'	'ISO-8859-15'	'US-ASCII'
	'Macintosh'	'UTF-8'
	'Shift_JIS'	

If you do not specify an encoding scheme, `fopen` opens files for processing using the default encoding for your system. For more information, see "Opening Files with Different Character Encodings".

If you specify a value for encoding that is not in the list of supported values, MATLAB issues a warning. Specifying other encoding names sometimes (but not always) produces correct results.

Data Types: `char` | `string`

`fileID` — File identifier of an open file
integer

File identifier of an open file, specified as an integer.

Data Types: `double`

Tips

- In most cases, it is not necessary to open a file in text mode. MATLAB import functions, all UNIX applications, and Microsoft Word and WordPad recognize `'\n'` as a newline indicator.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not support:
  - The input arguments `machinefmt`, `encodingIn`, or `fileID`.
  - The output argument `errmsg`.
  - The syntax `fopen('all')`.
  - Opening a file in text mode. That is the `permission` argument must not contain the letter `t`. For example, the value cannot be `'rt'`.
- The `permission` argument can contain three characters at most. The characters must be unique.
- If you disable extrinsic calls, then you cannot return file identifiers created with `fopen` to MATLAB functions or extrinsic functions. Use these file identifiers only internally.
- When generating C/C++ executables, static libraries, or dynamic libraries, you can open up to 20 files.
- The generated code does not report errors from invalid file identifiers. Write your own file open error handling in your MATLAB code. Test whether `fopen` returns `-1`, which indicates that the file open failed. For example:

```
...
fid = fopen(filename, 'r');
if fid == -1
  % fopen failed
```

```
else
% fopen successful, okay to call fread
A = fread(fid);
...
```

- The behavior of the generated code for `fread` is compiler-dependent when you:

  1. Open a file using `fopen` with a `permission` of `a+`.
  2. Read the file using `fread` before calling an I/O function, such as `fseek` or `frewind`, that sets the file position indicator.

See Also

See Also

`fclose` | `feof` | `ferror` | `fprintf` | `fread` | `frewind` | `fscanf` | `fseek` | `ftell` | `fwrite`

Introduced before R2006a

fopen (serial)

Connect serial port object to device

Syntax

```
fopen(obj)
```

Description

`fopen(obj)` connects the serial port object, `obj` to the device.

Examples

This example creates the serial port object `s`, connects `s` to the device using `fopen`, writes and reads text data, and then disconnects `s` from the device. This example works on a Windows platform.

```
s = serial('COM1');
fopen(s)
fprintf(s,'*IDN?')
idn = fscanf(s);
fclose(s)
```

Tips

Before you can perform a read or write operation, `obj` must be connected to the device with the `fopen` function. When `obj` is connected to the device:

- Data remaining in the input buffer or the output buffer is flushed.
- The `Status` property is set to `open`.
- The `BytesAvailable`, `ValuesReceived`, `ValuesSent`, and `BytesToOutput` properties are set to 0.

An error is returned if you attempt to perform a read or write operation while `obj` is not connected to the device. You can connect only one serial port object to a given device.

Some properties are read-only while the serial port object is open (connected), and must be configured before using `fopen`. Examples include `InputBufferSize` and `OutputBufferSize`. Refer to the property reference pages to determine which properties have this constraint.

The values for some properties are verified only after `obj` is connected to the device. If any of these properties are incorrectly configured, then an error is returned when `fopen` is issued and `obj` is not connected to the device. Properties of this type include `BaudRate`, and are associated with device settings.

See Also

`fclose` | `BytesAvailable` | `BytesToOutput` | `Status` | `ValuesReceived` | `ValuesSent`

Introduced before R2006a

for

`for` loop to repeat specified number of times

Syntax

```
for index = values
   statements
end
```

Description

`for index = values, statements, end` executes a group of statements in a loop for a specified number of times. *`values`* has one of the following forms:

- *`initVal`*:*`endVal`* — Increment the *`index`* variable from *`initVal`* to *`endVal`* by `1`, and repeat execution of *`statements`* until *`index`* is greater than *`endVal`*.
- *`initVal`*:*`step`*:*`endVal`* — Increment *`index`* by the value *`step`* on each iteration, or decrements *`index`* when *`step`* is negative.
- *`valArray`* — Create a column vector, *`index`*, from subsequent columns of array *`valArray`* on each iteration. For example, on the first iteration, *`index`* `=` *`valArray`*`(:,1)`. The loop executes a maximum of *`n`* times, where *`n`* is the number of columns of *`valArray`*, given by `numel(`*`valArray`*`(1,:))`. The input *`valArray`* can be of any MATLAB data type, including a character vector, cell array, or struct.

Examples

Assign Matrix Values

Create a Hilbert matrix of order 10.

```
s = 10;
H = zeros(s);

for c = 1:s
```

```
    for r = 1:s
        H(r,c) = 1/(r+c-1);
    end
end
```

Decrement Values

Step by increments of `-0.2`, and display the values.

```
for v = 1.0:-0.2:0.0
   disp(v)
end
```

```
     1

    0.8000

    0.6000

    0.4000

    0.2000

     0
```

Execute Statements for Specified Values

```
for v = [1 5 8 17]
   disp(v)
end
```

```
     1

     5

     8

    17
```

Repeat Statements for Each Matrix Column

```
for I = eye(4,3)
    disp('Current unit vector:')
```

```
    disp(I)
end
```

```
Current unit vector:

     1
     0
     0
     0

Current unit vector:

     0
     1
     0
     0

Current unit vector:

     0
     0
     1
     0
```

Tips

- To programmatically exit the loop, use a `break` statement. To skip the rest of the instructions in the loop and begin the next iteration, use a `continue` statement.
- Avoid assigning a value to the *`index`* variable within the loop statements. The `for` statement overrides any changes made to *`index`* within the loop.
- To iterate over the values of a single column vector, first transpose it to create a row vector.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`break` | `colon` | `continue` | `end` | `if` | `parfor` | `return` | `switch`

Introduced before R2006a

format

Set Command Window output display format

Syntax

```
format style
format
```

Description

`format style` changes the output display format in the Command Window to the format specified by `style`.

`format`, by itself, resets the output format to the default, which is the short, fixed-decimal format for floating-point notation and loose line spacing for all output lines.

Numeric formats affect only how numbers appear in Command Window output, not how MATLAB computes or saves them.

Examples

Long Format

Set the output format to the long fixed-decimal format and display the value of `pi`.

```
format long
pi
```

```
ans =
   3.141592653589793
```

Reset Format to Default

Set the output format to the short engineering format with compact line spacing, and then reset the format to the default.

```
format shortEng
format compact
x = rand(3)

x =
   814.7237e-003   913.3759e-003   278.4982e-003
   905.7919e-003   632.3592e-003   546.8815e-003
   126.9868e-003    97.5404e-003   957.5068e-003

format
x

x =

    0.8147    0.9134    0.2785
    0.9058    0.6324    0.5469
    0.1270    0.0975    0.9575
```

Hexadecimal Format

Display the maximum values for integers and real numbers in hexadecimal format.

```
format hex
intmax('uint64')

ans = uint64
   ffffffffffffffff


realmax

ans =
   7fefffffffffffff
```

Short and Long Engineering Notation

Display the difference between `shortEng` and `longEng` formats.

Set the output format to `shortEng`.

```
format shortEng
```

Create a variable and increase its value by a multiple of 10 each time through a `for` loop.

```
A = 5.123456789;
for k = 1:10
   disp(A)
   A = A*10;
end
```

```
     5.1235e+000

    51.2346e+000

   512.3457e+000

     5.1235e+003

    51.2346e+003

   512.3457e+003

     5.1235e+006

    51.2346e+006

   512.3457e+006

     5.1235e+009
```

The values display with 4 digits after the decimal point and an exponent that is a multiple of 3.

Set the output format to the long engineering format and view the same values.

```
format longEng

A = 5.123456789;
for k = 1:10
   disp(A)
   A = A*10;
end
```

```
    5.12345678900000e+000

    51.2345678900000e+000

    512.345678900000e+000
```

```
5.12345678900000e+003

51.2345678900000e+003

512.345678900000e+003

5.12345678900000e+006

51.2345678900000e+006

512.345678900000e+006

5.12345678900000e+009
```

The values display with 15 digits and an exponent that is a multiple of 3.

Large Data Range Format

Use the `shortG` format when some of the values in an array are short numbers and some have large exponents. The `shortG` format picks whichever short fixed-decimal format or short scientific notation has the most compact display.

Create a variable and display output in the `short` format, which is the default.

```
x = [25 56.31156 255.52675 9876899999];
format short
x
```

```
x =

   1.0e+09 *

    0.0000    0.0000    0.0000    9.8769
```

Set the format to `shortG` and redisplay the values.

```
format shortG
x
```

```
x =
            25        56.312        255.53   9.8769e+09
```

Get Current Format

Get the current numeric format.

```
f = get(0,'Format')
```

```
f =

shortG
```

Get the current line spacing, which can be set to `loose` or `compact`.

```
S = get(0,'FormatSpacing')
```

```
S =

loose
```

- "Format Output"

Input Arguments

`style` — Output display format
`short` (default) | `long` | `shortE` | `longE` | ...

Output display format, specified as a character vector in one of these forms.

Numeric Format

These styles control the output display format for numeric variables.

Style	Result	Example
`short` (default)	Short, fixed-decimal format with 4 digits after the decimal point.	`3.1416`
`long`	Long, fixed-decimal format with 15 digits after the decimal point for `double` values, and 7 digits after the decimal point for `single` values.	`3.141592653589793`

Style	Result	Example
`shortE`	Short scientific notation with 4 digits after the decimal point.	`3.1416e+00`
`longE`	Long scientific notation with 15 digits after the decimal point for `double` values, and 7 digits after the decimal point for `single` values.	`3.141592653589793e+00`
`shortG`	Short, fixed-decimal format or scientific notation, whichever is more compact, with a total of 5 digits.	`3.1416`
`longG`	Long, fixed-decimal format or scientific notation, whichever is more compact, with a total of 15 digits for `double` values, and 7 digits for `single` values.	`3.14159265358979`
`shortEng`	Short engineering notation (exponent is a multiple of 3) with 4 digits after the decimal point.	`3.1416e+000`
`longEng`	Long engineering notation (exponent is a multiple of 3) with 15 significant digits.	`3.14159265358979e+000`
`+`	Positive/Negative format with `+`, `-`, and blank characters displayed for positive, negative, and zero elements.	`+`
`bank`	Currency format with 2 digits after the decimal point.	`3.14`
`hex`	Hexadecimal representation of a binary double-precision number.	`400921fb54442d18`
`rat`	Ratio of small integers.	`355/113`

Line Spacing Format

Style	Result	Example

`compact`	Suppress excess blank lines to show more output on a single screen.	`theta = pi/2`
		`theta =`
		`  1.5708`

Style	Result	Example

`loose`	Add blank lines to make output more readable.	`theta = pi/2`
		`theta =`
		`  1.5708`

Tips

- The specified format applies only to the current MATLAB session. To maintain a format across sessions, choose a **Numeric format** or **Numeric display** option in the Command Window Preferences.
- You can insert a space between `short` or `long` and the presentation type, for instance, `format short E`.
- MATLAB always displays integer data types to the appropriate number of digits for the data type. For example, MATLAB uses 3 digits to display `int8` data types (for instance, -128:127). Setting the output format to `short` or `long` does not affect the display of integer-type variables.
- Integer-valued, floating-point numbers with a maximum of 9 digits do not display in scientific notation.
- If you are displaying a matrix with a wide range of values, consider using `shortG`. See "Large Data Range Format" on page 1-3510.

See Also

See Also

`disp` | `fprintf` | `rat`

Topics

"Format Output"

Introduced before R2006a

fplot

Plot expression or function

Syntax

```
fplot(f)
fplot(f,xinterval)

fplot(funx,funy)
fplot(funx,funy,tinterval)

fplot( ___ ,LineSpec)
fplot( ___ ,Name,Value)
fplot(ax, ___ )
fp = fplot( ___ )
[x,y] = fplot( ___ )
```

Description

`fplot(f)` plots the curve defined by the function `y = f(x)` over the default interval `[-5 5]` for `x`.

`fplot(f,xinterval)` plots over the specified interval. Specify the interval as a two-element vector of the form `[xmin xmax]`.

`fplot(funx,funy)` plots the curve defined by `x = funx(t)` and `y = funy(t)` over the default interval `[-5 5]` for `t`.

`fplot(funx,funy,tinterval)` plots over the specified interval. Specify the interval as a two-element vector of the form `[tmin tmax]`.

`fplot( ___ ,LineSpec)` specifies the line style, marker symbol, and line color. For example, `'-r'` plots a red line. Use this option after any of the input argument combinations in the previous syntaxes.

`fplot( ___ ,Name,Value)` specifies line properties using one or more name-value pair arguments. For example, `'LineWidth',2` specifies a line width of 2 points.

`fplot(ax, ___ )` plots into the axes specified by`ax` instead of the current axes (`gca`). Specify the axes as the first input argument.

`fp = fplot( ___ )` returns a `FunctionLine` object or a `ParameterizedFunctionLine` object, depending on the inputs. Use `fp` to query and modify properties of a specific line. For a list of properties, see FunctionLine Properties or ParameterizedFunctionLine Properties.

`[x,y] = fplot( ___ )` returns the abscissas and ordinates for the function without creating a plot. This syntax will be removed in a future release. Use the `XData` and `YData` properties of the line object, `fp`, instead.

Note: `fplot` no longer supports input arguments for specifying the error tolerance or the number of evaluation points. To specify the number of evaluation points, use the MeshDensity property.

Examples

Plot Expression

Plot `sin(x)` over the default `x` interval `[-5 5]`.

```
fplot(@(x) sin(x))
```

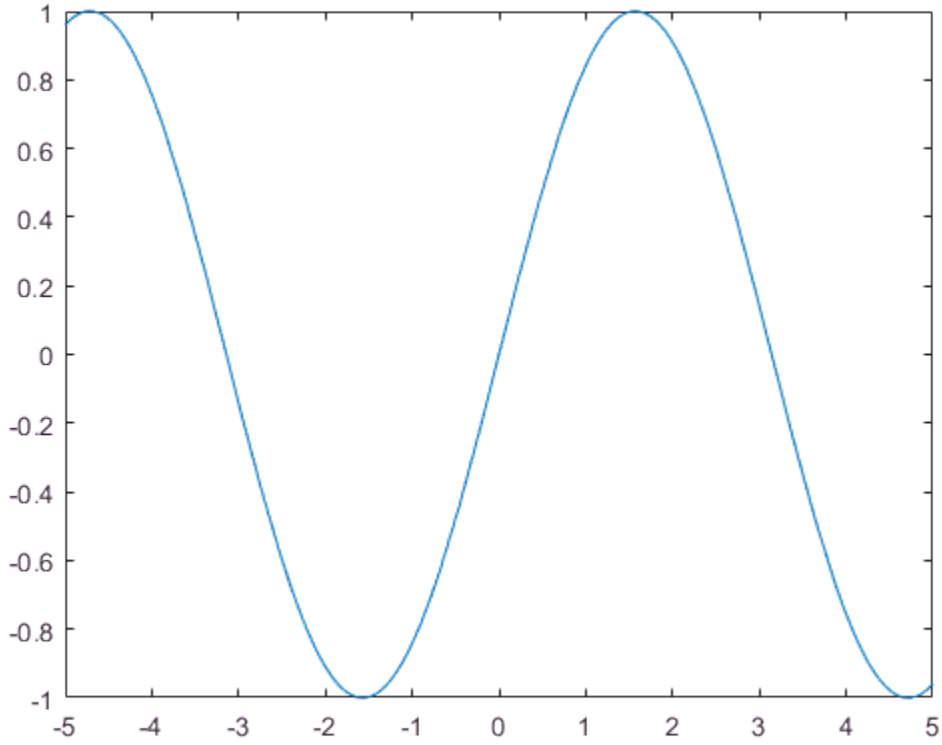

Plot Parametric Curve

Plot the parametric curve $x = cos(3t)$ and $y = sin(2t)$.

```
xt = @(t) cos(3*t);
yt = @(t) sin(2*t);
fplot(xt,yt)
```

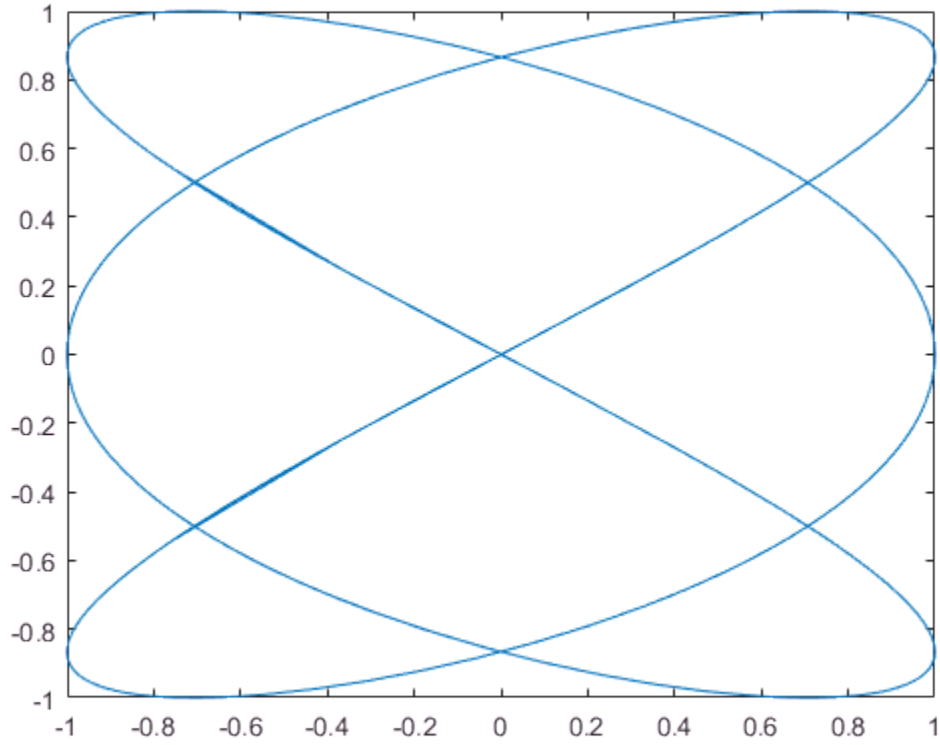

Specify Plotting Interval and Plot Piecewise Functions

Plot the piecewise function

$$\begin{array}{ll} e^x & -3 < x < 0 \\ \cos(x) & 0 < x < 3. \end{array}$$

Plot multiple lines using `hold on`. Specify the plotting intervals using the second input argument of `fplot`. Specify the color of the plotted lines as blue using `'b'`. When you plot multiple lines in the same axes, the axis limits adjust to incorporate all the data.

```
fplot(@(x) exp(x),[-3 0],'b')
```

```
hold on
fplot(@(x) cos(x),[0 3],'b')
hold off
grid on
```

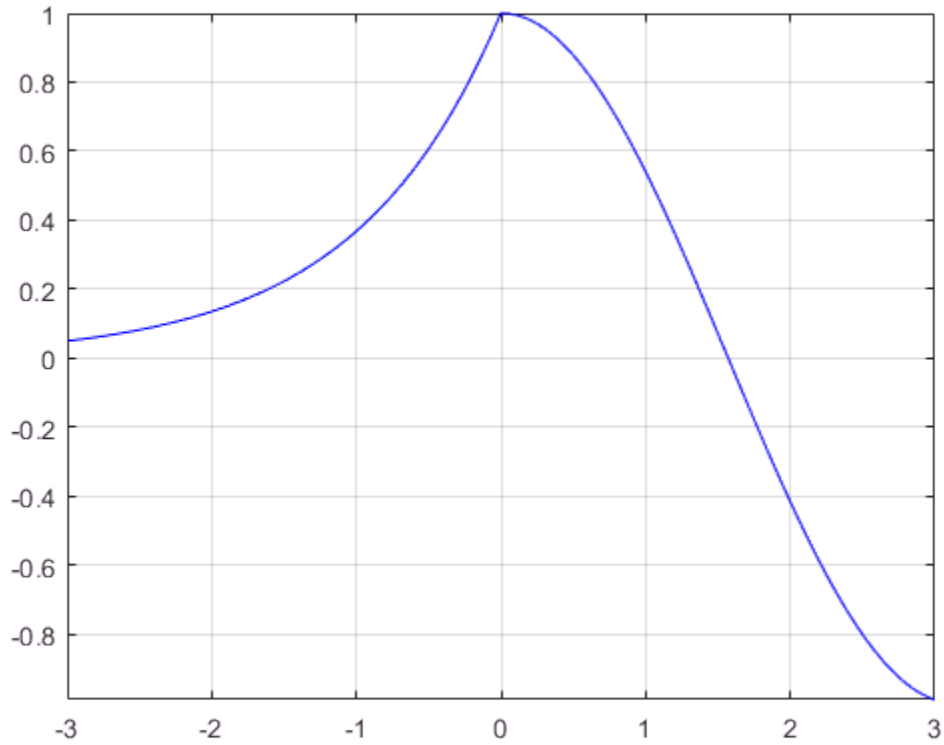

Specify Line Properties and Display Markers

Plot three sine waves with different phases. For the first, use a line width of 2 points. For the second, specify a dashed red line style with circle markers. For the third, specify a cyan, dash-dotted line style with asterisk markers.

```
fplot(@(x) sin(x+pi/5),'Linewidth',2);
```

```
hold on
fplot(@(x) sin(x-pi/5),'--or');
fplot(@(x) sin(x),'-.*c')
hold off
```

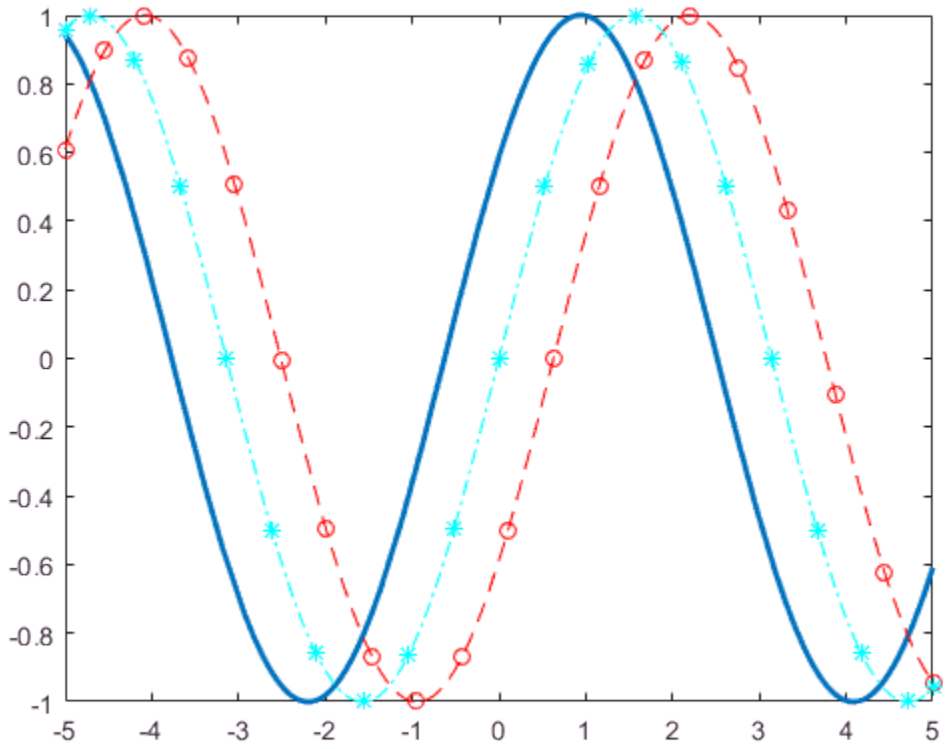

Modify Line Properties After Creation

Plot `sin(x)` and assign the function line object to a variable.

```
fp = fplot(@(x) sin(x))
```

```
fp =
```

```
FunctionLine with properties:

   Function: @(x)sin(x)
      Color: [0 0.4470 0.7410]
  LineStyle: '-'
  LineWidth: 0.5000

Show all properties
```

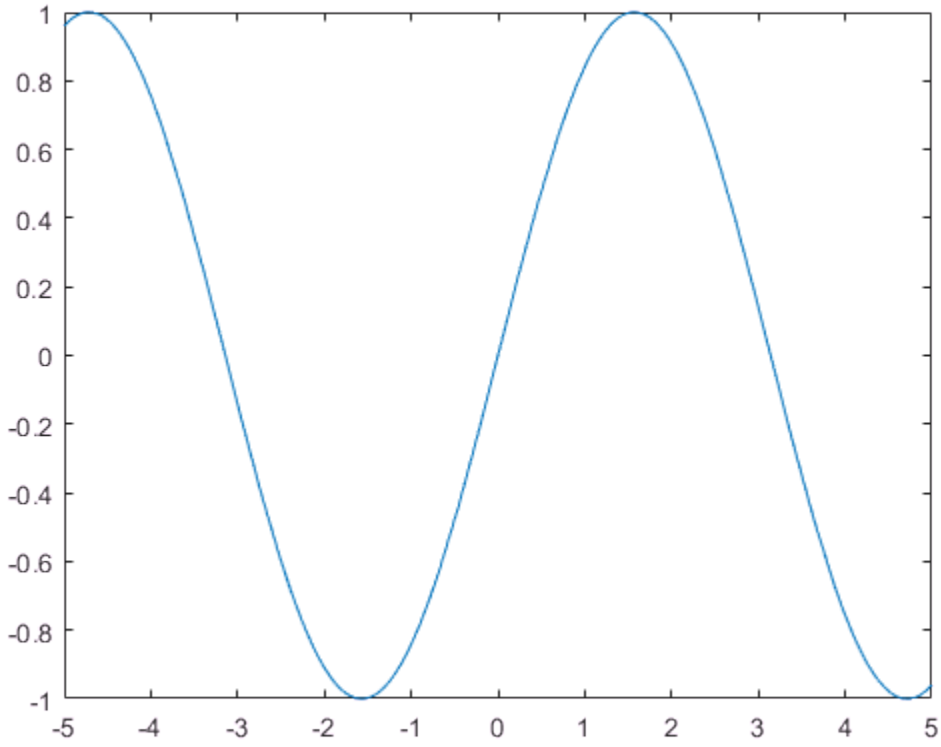

Change the line to a dotted red line by using dot notation to set properties. Add cross markers and set the marker color to blue.

```
fp.LineStyle = ':';
```

```
fp.Color = 'r';
fp.Marker = 'x';
fp.MarkerEdgeColor = 'b';
```

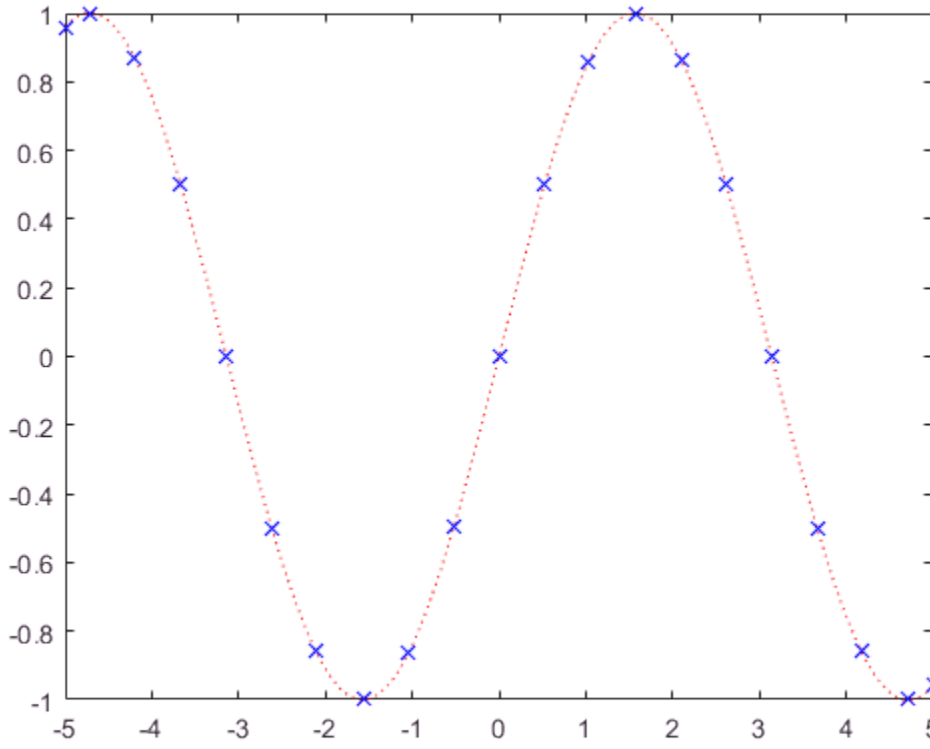

Plot Multiple Lines in Same Axes

Plot two lines using `hold on`.

```
fplot(@(x) sin(x))
hold on
fplot(@(x) cos(x))
```

```
hold off
```

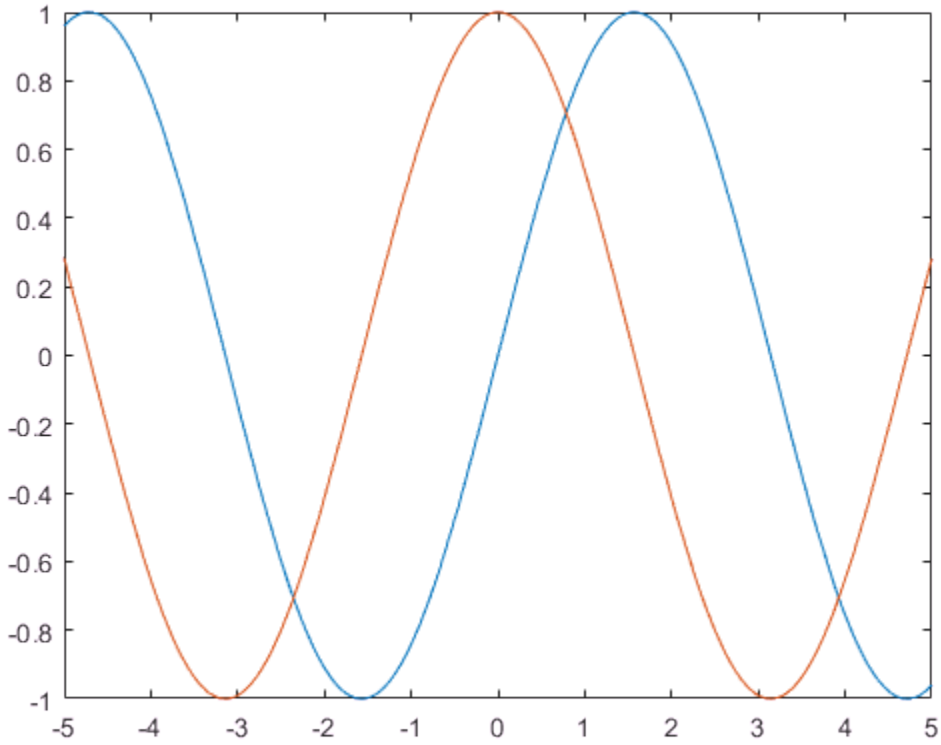

Add Title and Axis Labels and Format Ticks

Plot $\sin(x)$ from -2π to 2π using a function handle. Display the grid lines. Then, add a title and label the *x*-axis and *y*-axis.

```
fplot(@sin,[-2*pi 2*pi])
grid on
title('sin(x) from -2\pi to 2\pi')
xlabel('x');
ylabel('y');
```

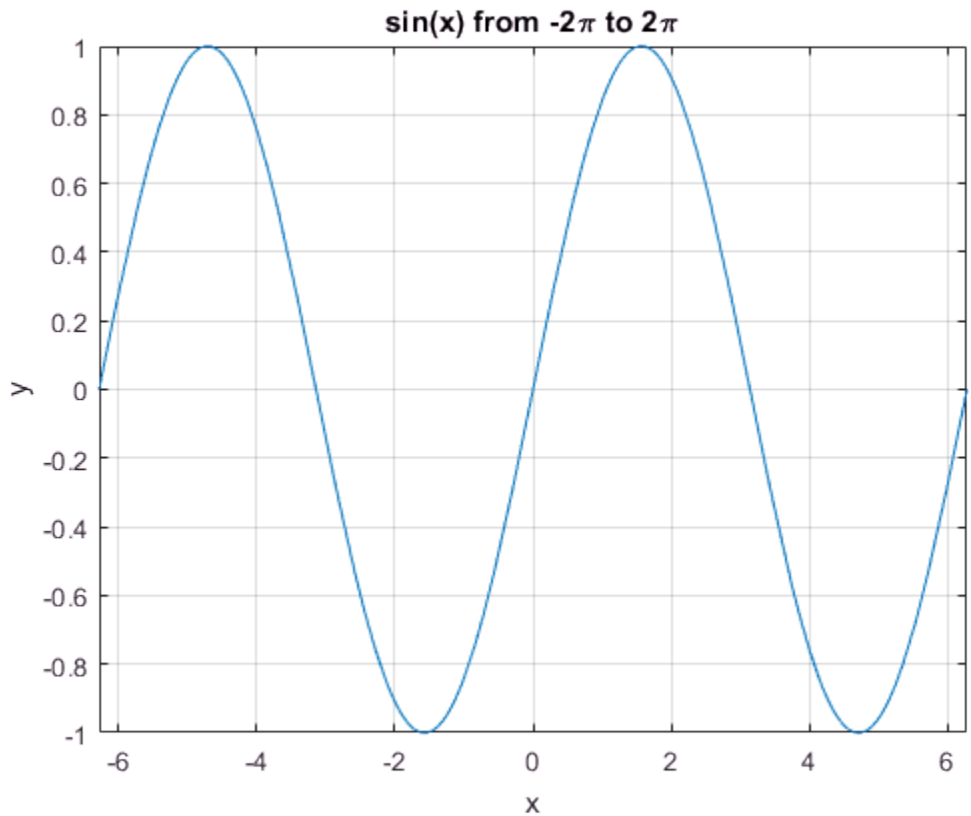

Use `gca` to access the current axes object. Display tick marks along the *x*-axis at intervals of $\pi/2$. Format the *x*-axis tick values by setting the `XTick` and `XTickLabel` properties of the axes object. Similar properties exist for the *y*-axis.

```
ax = gca;
ax.XTick = -2*pi:pi/2:2*pi;
ax.XTickLabel = {'-2\pi','-3\pi/2','-\pi','-\pi/2','0','\pi/2','\pi','3\pi/2','2\pi'};
```

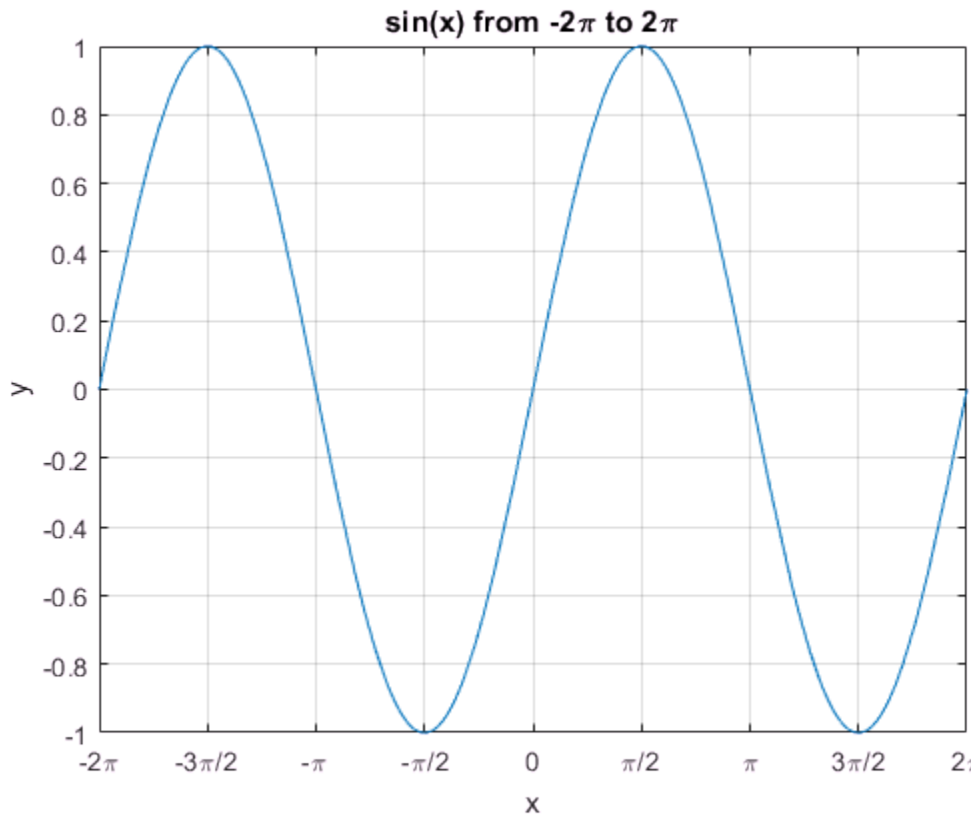

Input Arguments

`f` — Function to plot
function handle

Function to plot, specified as a function handle to a named or anonymous function.

Specify a function of the form `y = f(x)`. The function must accept a vector input argument and return a vector output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Note: Support for character vector inputs will be removed in a future release. Use function handles instead.

Example: `f = @(x) sin(x);`

`xinterval` — Interval for `x`

`[-5 5]` (default) | two-element vector of form `[xmin xmax]`

Interval for `x`, specified as a two-element vector of the form `[xmin xmax]`.

`funx` — Parametric function for *x* coordinates

function handle

Parametric function for *x* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `x = funx(t)`. The function must accept a vector input argument and return a vector output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funx = @(t) sin(2*t);`

`funy` — Parametric function for *y* coordinates

anonymous function | function handle

Parametric function for *y* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `y = funy(t)`. The function must accept a vector input argument and return a vector output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funy = @(t) cos(3*t);`

`tinterval` — Interval for `t`

`[-5 5]` (default) | two-element vector of form `[tmin tmax]`

Interval for `t`, specified as a two-element vector of the form `[tmin tmax]`.

`ax` — Axes object

axes object

Axes object. If you do not specify an axes object, then `fplot` uses the current axes (`gca`).

`LineSpec` — Line specification
character vector

Line specification, specified as a character vector with a line style, marker, and color. The elements of the character vector can appear in any order, and you can omit one or more options. To show only markers with no connecting lines, specify a marker and omit the line style.

Example: `'r--o'` specifies a red color, a dashed line, and circle markers

Line Style Specifier	Description
`-`	Solid line (default)
`--`	Dashed line
`:`	Dotted line
`-.`	Dash-dot line

Marker Specifier	Description
`o`	Circle
`+`	Plus sign
`*`	Asterisk
`.`	Point
`x`	Cross
`s`	Square
`d`	Diamond
`^`	Upward-pointing triangle
`v`	Downward-pointing triangle
`>`	Right-pointing triangle
`<`	Left-pointing triangle
`p`	Pentagram
`h`	Hexagram

Color Specifier	Description
y	yellow
m	magenta
c	cyan
r	red
g	green
b	blue
w	white
k	black

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are only a subset. For a complete list, see FunctionLine Properties or ParameterizedFunctionLine Properties.

Example: `'Marker','o','MarkerFaceColor','red'`

`'MeshDensity'` — Number of evaluation points

23 (default) | number

Number of evaluation points, specified as a number. The default is `23`. Because `fplot` uses adaptive evaluation, the actual number of evaluation points is greater.

`'Color'` — Line color

`[0 0.4470 0.7410]` (default) | RGB triplet | character vector

Line color, specified as an RGB triplet or a character vector of a color name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'LineStyle'` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`'Marker'` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'x'` | `'s'` | `'d'` | `...`

Marker symbol, specified as one of the values in this table. By default, a line does not have markers. Add markers at selected points along the line by specifying a marker.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`'MarkerEdgeColor'` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

'MarkerFaceColor' — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color specified in the MarkerEdgeColor property.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]

Long Name	Short Name	RGB Triplet
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.3 0.2 0.1]

Example: 'green'

'MarkerSize' — Marker size
6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

Output Arguments

fp — One or more FunctionLine or ParameterizedFunctionLine objects
scalar | vector

One or more FunctionLine or ParameterizedFunctionLine objects, returned as a scalar or a vector.

- If you use the fplot(f) syntax or a variation of this syntax, then fplot returns FunctionLine objects.
- If you use the fplot(funx,funy) syntax or a variation of this syntax, then fplot returns ParameterizedFunctionLine objects.

You can use these objects to query and modify properties of a specific line. For a list of properties, see FunctionLine Properties and ParameterizedFunctionLine Properties.

Tips

- Use element-wise operators for the best performance and to avoid a warning message. For example, use x.*y instead of x*y. For more information, see “Array vs. Matrix Operations”.
- When you zoom in on the chart, fplot replots the data, which can reveal hidden details.

See Also

See Also

Functions
`fcontour` | `fmesh` | `fplot3` | `fsurf` | `hold` | `title`

Properties
FunctionLine Properties | ParameterizedFunctionLine Properties

Introduced before R2006a

fplot3

3-D parametric curve plotter

Syntax

```
fplot3(funx,funy,funz)
fplot3(funx,funy,funz,tinterval)

fplot3( ___ ,LineSpec)
fplot3( ___ ,Name,Value)
fplot3(ax, ___ )
fp = fplot3( ___ )
```

Description

`fplot3(funx,funy,funz)` plots the parametric curve defined by `x = funx(t)`, `y = funy(t)`, and `z = funz(t)` over the default interval `[-5,5]` for `t`.

`fplot3(funx,funy,funz,tinterval)` plots over the specified interval. Specify the interval as a two-element vector of the form `[tmin tmax]`.

`fplot3( ___ ,LineSpec)` sets the line style, marker symbol, and line color. For example, `'-r'` specifies a red line. Use this option after any of the previous input argument combinations.

`fplot3( ___ ,Name,Value)` specifies line properties using one or more name-value pair arguments. For example, `'LineWidth',2` specifies a line width of 2 points.

`fplot3(ax, ___ )` plots into the axes specified by `ax` instead of the current axes. Specify the axes as the first input argument.

`fp = fplot3( ___ )` returns a `ParameterizedFunctionLine` object. Use the object to query and modify properties of a specific line. For a list of properties, see ParameterizedFunctionLine Properties.

Examples

Plot 3-D Parametric Line

Plot the 3-D parametric line

$$x = \sin(t)$$
$$y = \cos(t)$$
$$z = t$$

over the default parameter range `[-5 5]`.

```
xt = @(t) sin(t);
yt = @(t) cos(t);
zt = @(t) t;
fplot3(xt,yt,zt)
```

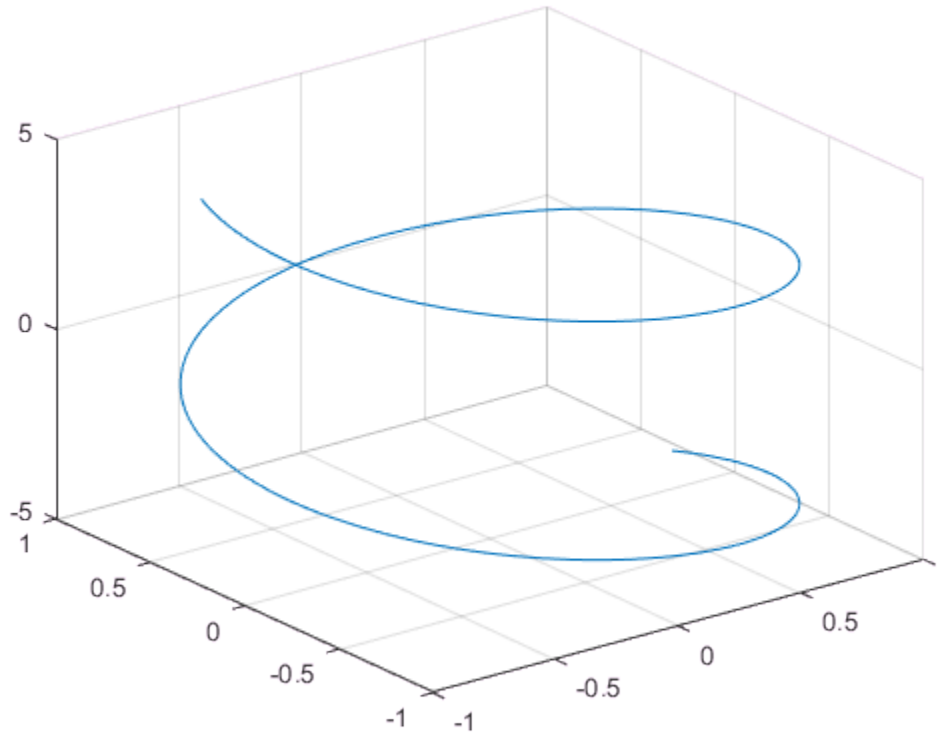

Specify Parameter Range

Plot the parametric line

$$x = e^{-t/10}\sin(5t)$$
$$y = e^{-t/10}\cos(5t)$$
$$z = t$$

over the parameter range `[-10 10]` by specifying the fourth input argument of `fplot3`.

```
xt = @(t) exp(-t/10).*sin(5*t);
```

```
yt = @(t) exp(-t/10).*cos(5*t);
zt = @(t) t;
fplot3(xt,yt,zt,[-10 10])
```

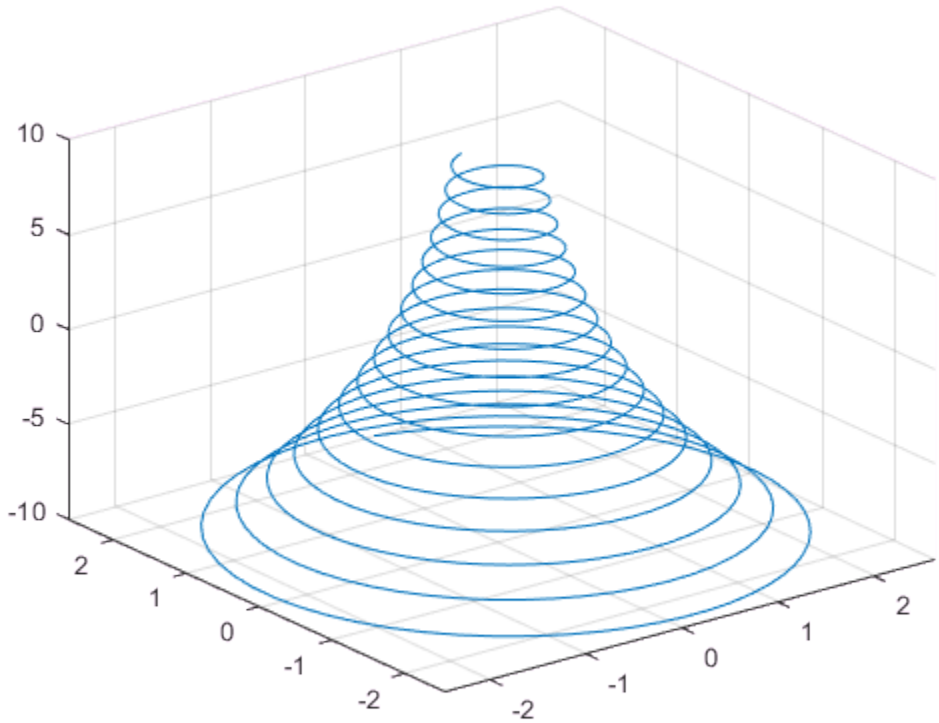

Specify Line Properties and Display Markers

Plot the same 3-D parametric curve three times over different intervals of the parameter. For the first interval, use a line width of 2 points. For the second, specify a dashed red line style with circle markers. For the third, specify a cyan, dash-dotted line style with asterisk markers.

```
fplot3(@(t)sin(t), @(t)cos(t), @(t)t, [0 2*pi], 'LineWidth', 2)
```

```
hold on
fplot3(@(t)sin(t), @(t)cos(t), @(t)t, [2*pi 4*pi], '--or')
fplot3(@(t)sin(t), @(t)cos(t), @(t)t, [4*pi 6*pi], '-.*c')
hold off
```

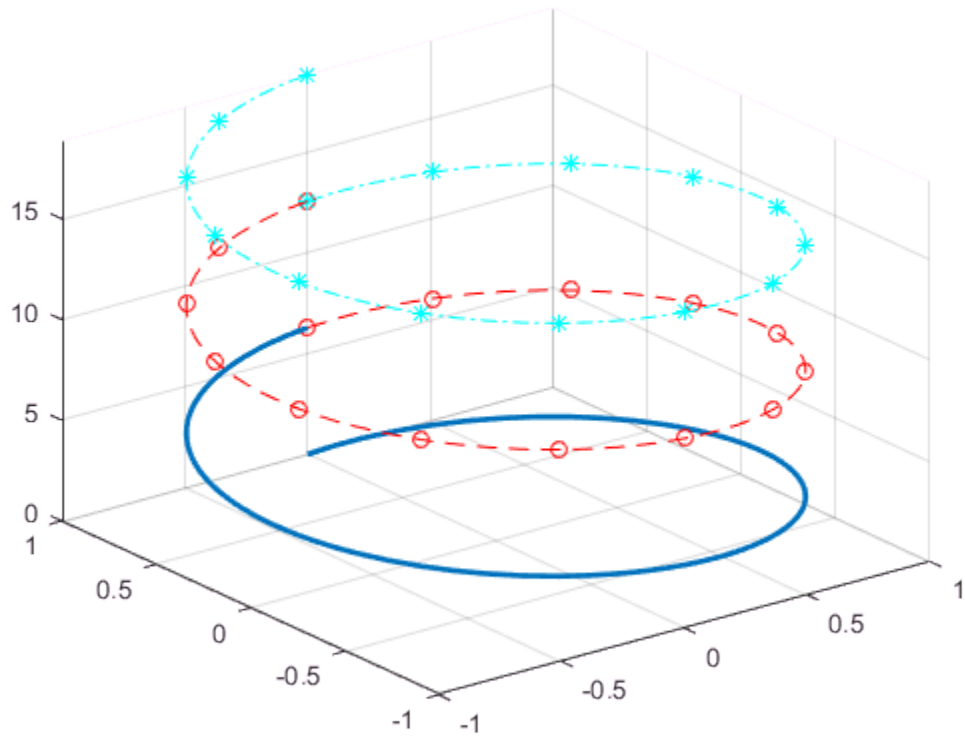

Plot Multiple Lines in Same Axes

Plot multiple lines in the same axes using `hold on`.

```
fplot3(@(t)t, @(t)t, @(t)t)
hold on
fplot3(@(t)-t, @(t)t, @(t)-t)
```

```
hold off
```

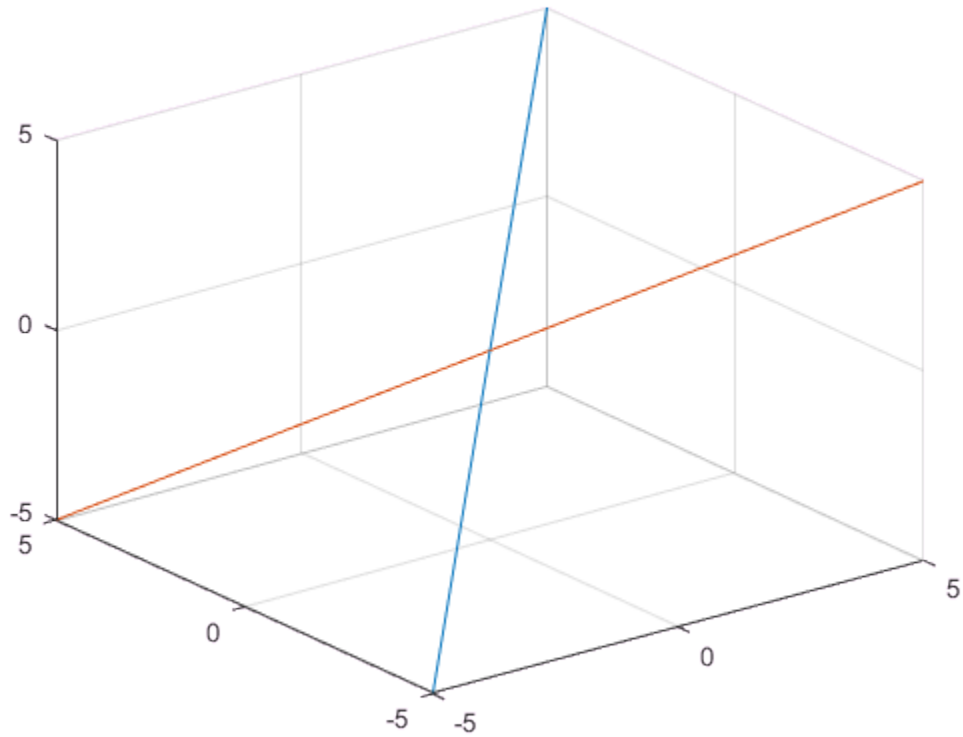

Modify 3-D Parametric Line After Creation

Plot the parametric line

$$x = e^{-|t|/10}\sin(5|t|)$$
$$y = e^{-|t|/10}\cos(5|t|)$$
$$z = t.$$

Assign the parameterized function line object to a variable.

```
xt = @(t)exp(-abs(t)/10).*sin(5*abs(t));
yt = @(t)exp(-abs(t)/10).*cos(5*abs(t));
zt = @(t)t;
fp = fplot3(xt,yt,zt)
```

```
fp =
  ParameterizedFunctionLine with properties:

    XFunction: @(t)exp(-abs(t)/10).*sin(5*abs(t))
    YFunction: @(t)exp(-abs(t)/10).*cos(5*abs(t))
    ZFunction: @(t)t
        Color: [0 0.4470 0.7410]
    LineStyle: '-'
    LineWidth: 0.5000

  Show all properties
```

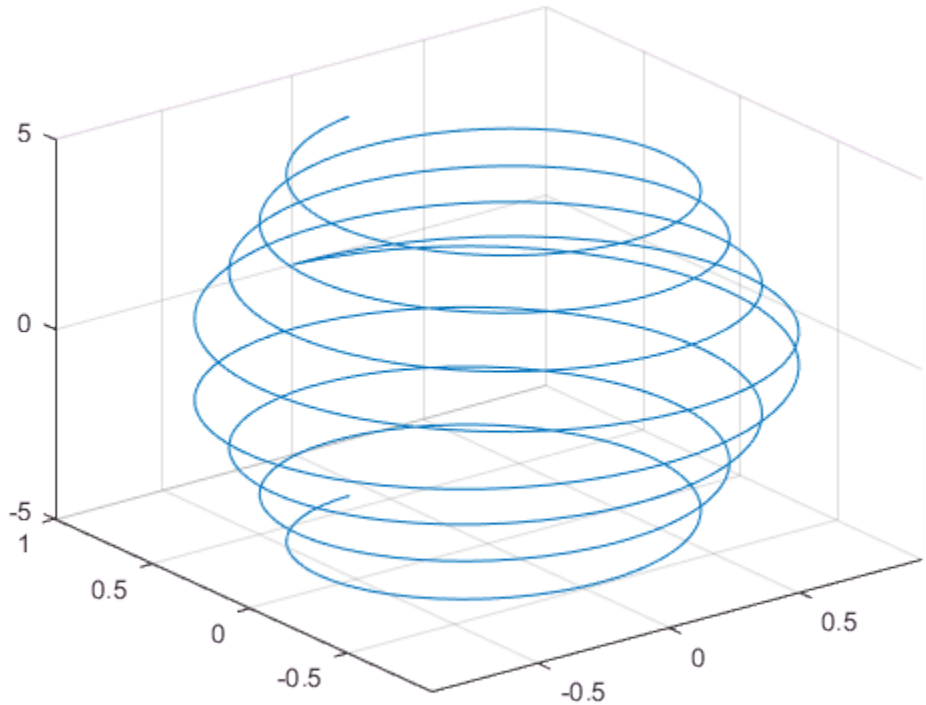

Change the range of parameter values to `[-10 10]` and change the line color to red.

```
fp.TRange = [-10 10];
fp.Color = 'r';
```

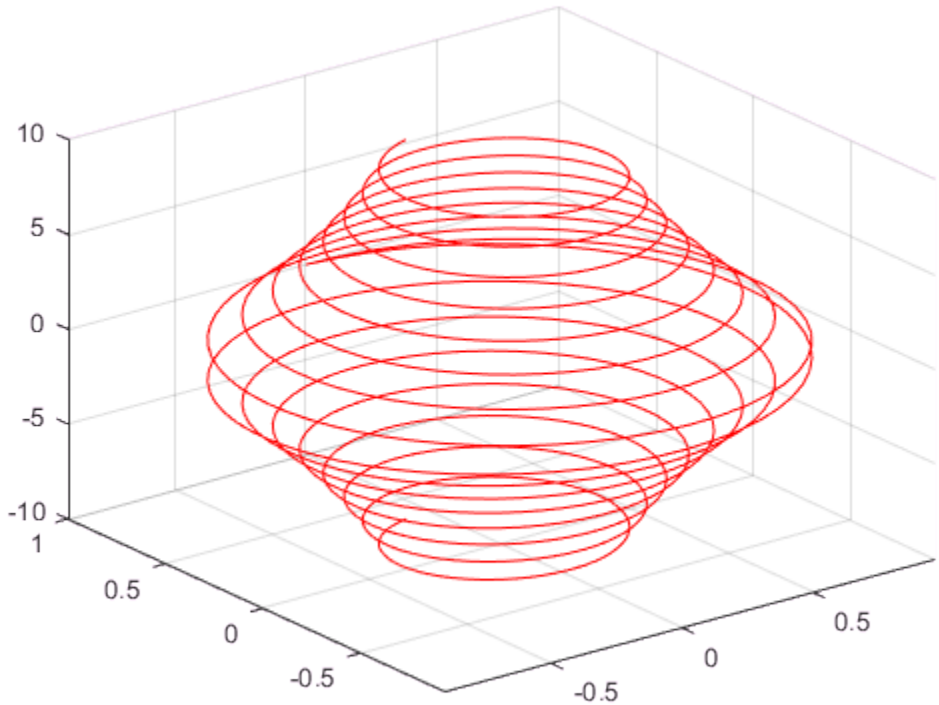

Add Title and Axis Labels and Format Ticks

For t values in the range -2π to 2π, plot the parametric line

$$x = t$$
$$y = t/2$$
$$z = \sin(6t).$$

Add a title, *x*-axis label, and *y*-axis label. Additionally, change the view of the axes and display the axes box outline.

```
xt = @(t)t;
yt = @(t)t/2;
zt = @(t)sin(6*t);
fplot3(xt,yt,zt,[-2*pi 2*pi],'MeshDensity',30,'LineWidth',1);

title('x=t, y=t/2, z=sin(6t) for -2\pi<t<2\pi')
xlabel('x');
ylabel('y');
view(52.5,30)
box on
```

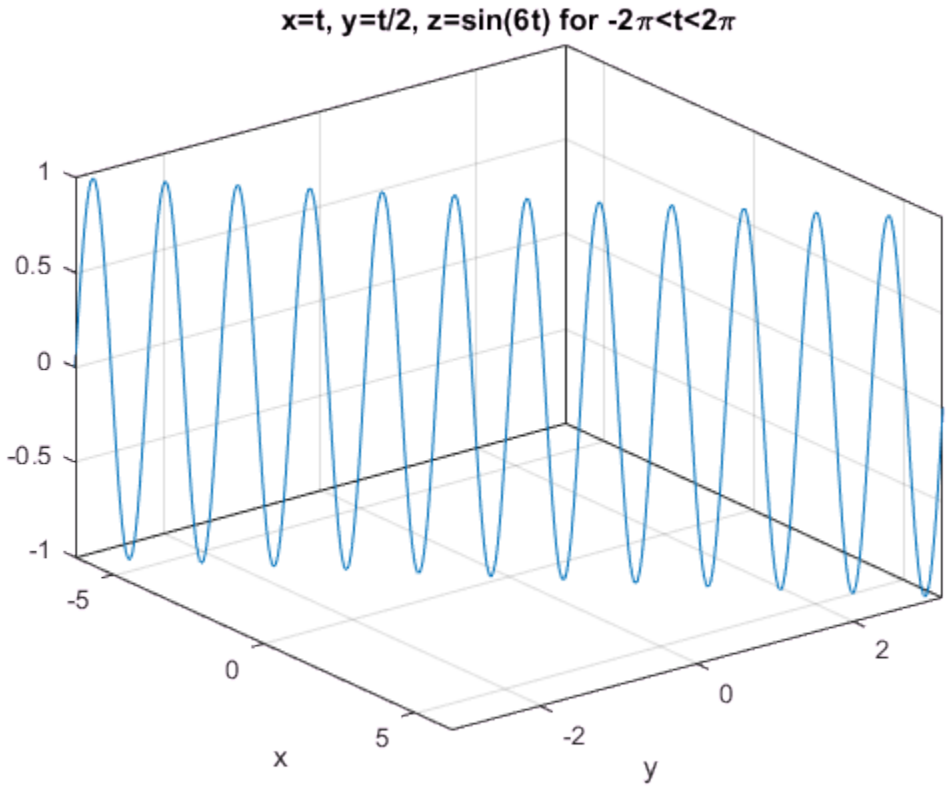

Access the axes object using `gca`. Specify the *x*-axis tick values and associated labels using the `XTick` and `XTickLabel` properties of the axes object. Similarly, specify the *y*-axis tick values and associated labels.

```
ax = gca;
ax.XTick = -2*pi:pi/2:2*pi;
ax.XTickLabel = {'-2\pi','-3\pi/2','-\pi','-\pi/2','0','\pi/2','\pi','3\pi/2','2\pi'};
ax.YTick = -pi:pi/2:pi;
ax.YTickLabel = {'-\pi','-\pi/2','0','\pi/2','\pi'};
```

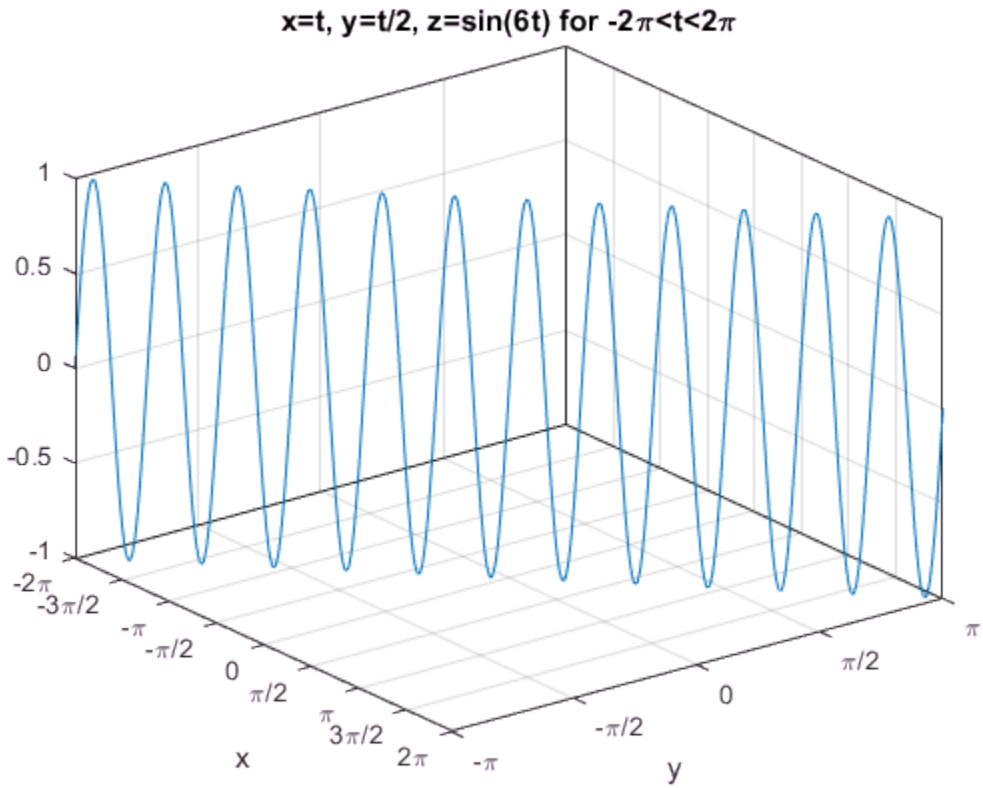

Input Arguments

`funx` — Parametric function for *x* coordinates
function handle

Parametric function for *x* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `x = funx(t)`. The function must accept a vector input argument and return a vector output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funx = @(t) sin(2*t);`

`funy` — Parametric function for *y* coordinates
function handle

Parametric function for *y* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `y = funy(t)`. The function must accept a vector input argument and return a vector output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funy = @(t) cos(2*t);`

`funz` — Parametric function for *z* coordinates
function handle

Parametric function for *z* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `z = funz(t)`. The function must accept a vector input argument and return a vector output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funz = @(t) t;`

`tinterval` — Interval for parameter `t`
`[-5 5]` (default) | two-element vector of form `[tmin tmax]`

Interval for parameter `t`, specified as a two-element vector of the form `[tmin tmax]`.

`ax` — Axes object
axes object

Axes object. If you do not specify an axes object, then `fplot3` uses the current axes (`gca`).

`LineSpec` — Line specification
character vector

Line specification, specified as a character vector with a line style, marker, and color. The elements of the character vector can appear in any order, and you can omit one or more options. To show only markers with no connecting lines, specify a marker and omit the line style.

Example: `'r--o'` specifies a red color, a dashed line, and circle markers

Line Style Specifier	Description
`-`	Solid line (default)
`--`	Dashed line
`:`	Dotted line
`-.`	Dash-dot line

Marker Specifier	Description
`o`	Circle
`+`	Plus sign
`*`	Asterisk
`.`	Point
`x`	Cross
`s`	Square
`d`	Diamond
`^`	Upward-pointing triangle
`v`	Downward-pointing triangle
`>`	Right-pointing triangle
`<`	Left-pointing triangle
`p`	Pentagram
`h`	Hexagram

Color Specifier	Description
y	yellow
m	magenta
c	cyan
r	red
g	green
b	blue
w	white
k	black

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Marker','o','MarkerFaceColor','red'`

The properties listed here are only a subset. For a complete list, see ParameterizedFunctionLine Properties.

`'MeshDensity'` — Number of evaluation points

23 (default) | number

Number of evaluation points, specified as a number. The default is `23`. Because `fplot3` uses adaptive evaluation, the actual number of evaluation points is greater.

`'Color'` — Line color

`[0 0.4470 0.7410]` (default) | RGB triplet | character vector

Line color, specified as an RGB triplet or a character vector of a color name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'LineStyle'` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`'Marker'` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'x'` | `'s'` | `'d'` | `...`

Marker symbol, specified as one of the values in this table. By default, a line does not have markers. Add markers at selected points along the line by specifying a marker.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`'MarkerEdgeColor'` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

'MarkerFaceColor' — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color specified in the MarkerEdgeColor property.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]

Long Name	Short Name	RGB Triplet
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.3 0.2 0.1]

Example: 'green'

'MarkerSize' — Marker size
6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

Output Arguments

fp — One or more ParameterizedFunctionLine objects
scalar | vector

One or more ParameterizedFunctionLine objects, returned as a scalar or a vector. You can use these objects to query and modify properties of a specific ParameterizedFunctionLine object. For details, see ParameterizedFunctionLine Properties.

See Also

See Also

Functions
fcontour | fmesh | fplot | fsurf | hold | title

Properties
ParameterizedFunctionLine Properties

Introduced in R2016a

fprintf

Write data to text file

Syntax

```
fprintf(fileID,formatSpec,A1,...,An)
fprintf(formatSpec,A1,...,An)

nbytes = fprintf( ___ )
```

Description

`fprintf(fileID,formatSpec,A1,...,An)` applies the `formatSpec` to all elements of arrays `A1,...An` in column order, and writes the data to a text file. `fprintf` uses the encoding scheme specified in the call to `fopen`.

`fprintf(formatSpec,A1,...,An)` formats data and displays the results on the screen.

`nbytes = fprintf( ___ )` returns the number of bytes that `fprintf` writes, using any of the input arguments in the preceding syntaxes.

Examples

Print Literal Text and Array Values

Print multiple numeric values and literal text to the screen.

```
A1 = [9.9, 9900];
A2 = [8.8,  7.7 ; ...
      8800, 7700];
formatSpec = 'X is %4.2f meters or %8.3f mm\n';
fprintf(formatSpec,A1,A2)
```

```
X is 9.90 meters or 9900.000 mm
```

```
X is 8.80 meters or 8800.000 mm
X is 7.70 meters or 7700.000 mm
```

`%4.2f` in the `formatSpec` input specifies that the first value in each line of output is a floating-point number with a field width of four digits, including two digits after the decimal point. `%8.3f` in the `formatSpec` input specifies that the second value in each line of output is a floating-point number with a field width of eight digits, including three digits after the decimal point. `\n` is a control character that starts a new line.

Print Double-Precision Values as Integers

Explicitly convert double-precision values with fractions to integer values.

```
a = [1.02 3.04 5.06];
fprintf('%d\n',round(a));
```

```
1
3
5
```

`%d` in the `formatSpec` input prints each value in the vector, `round(a)`, as a signed integer. `\n` is a control character that starts a new line.

Write Tabular Data to Text File

Write a short table of the exponential function to a text file called `exp.txt`.

```
x = 0:.1:1;
A = [x; exp(x)];

fileID = fopen('exp.txt','w');
fprintf(fileID,'%6s %12s\n','x','exp(x)');
fprintf(fileID,'%6.2f %12.8f\n',A);
fclose(fileID);
```

The first call to `fprintf` prints header text `x` and `exp(x)`, and the second call prints the values from variable `A`.

If you plan to read the file with Microsoft Notepad, use `'\r\n'` instead of `'\n'` to move to a new line. For example, replace the calls to `fprintf` with the following:

```
fprintf(fileID,'%6s %12s\r\n','x','exp(x)');
```

```
fprintf(fileID,'%6.2f %12.8f\r\n',A);
```

MATLAB import functions, all UNIX applications, and Microsoft Word and WordPad recognize `'\n'` as a newline indicator.

View the contents of the file with the `type` command.

```
type exp.txt
```

```
     x       exp(x)
  0.00   1.00000000
  0.10   1.10517092
  0.20   1.22140276
  0.30   1.34985881
  0.40   1.49182470
  0.50   1.64872127
  0.60   1.82211880
  0.70   2.01375271
  0.80   2.22554093
  0.90   2.45960311
  1.00   2.71828183
```

Get Number of Bytes Written to File

Write data to a file and return the number of bytes written.

Write an array of data, `A`, to a file and get the number of bytes that `fprintf` writes.

```
A = magic(4);

fileID = fopen('myfile.txt','w');
nbytes = fprintf(fileID,'%5d %5d %5d %5d\n',A)
```

```
nbytes = 96
```

The `fprintf` function wrote 96 bytes to the file.

Close the file.

```
fclose(fileID);
```

View the contents of the file with the `type` command.

```
type('myfile.txt')
```

```
    16     5     9     4
     2    11     7    14
     3    10     6    15
    13     8    12     1
```

Display Hyperlinks in Command Window

Display a hyperlink (The MathWorks Web Site) on the screen.

```
url = 'http://www.mathworks.com';
sitename = 'The MathWorks Web Site';

fprintf('<a href = "%s">%s</a>\n',url,sitename)
```

`%s` in the `formatSpec` input indicates that the values of the variables `url` and `sitename`, should be printed as text.

- "Export Cell Array to Text File"
- "Append To or Overwrite Existing Text Files"

Input Arguments

`fileID` — File identifier

1 (default) | 2 | scalar

File identifier, specified as one of the following:

- A file identifier obtained from `fopen`.
- 1 for standard output (the screen).
- 2 for standard error.

Data Types: `double`

`formatSpec` — Format of output fields

formatting operators

Format of the output fields, specified using formatting operators. `formatSpec` also can include ordinary text and special characters.

`formatSpec` can be a character vector in single quotes, or, starting in R2016b, a string scalar.

Formatting Operator

A formatting operator starts with a percent sign, `%`, and ends with a conversion character. The conversion character is required. Optionally, you can specify identifier, flags, field width, precision, and subtype operators between `%` and the conversion character. (Spaces are invalid between operators and are shown here only for readability).

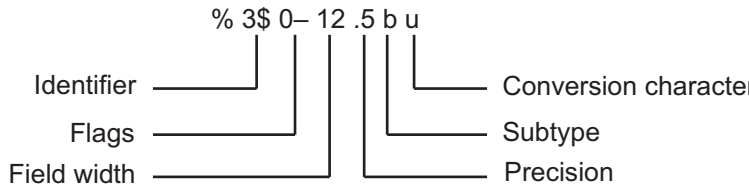

Conversion Character

This table shows conversion characters to format numeric and character data as text.

Value Type	Conversion	Details
Integer, signed	`%d` or `%i`	Base 10
Integer, unsigned	`%u`	Base 10
	`%o`	Base 8 (octal)
	`%x`	Base 16 (hexadecimal), lowercase letters `a`–`f`
	`%X`	Same as `%x`, uppercase letters `A`–`F`
Floating-point number	`%f`	Fixed-point notation (Use a precision operator to specify the number of digits after the decimal point.)
	`%e`	Exponential notation, such as `3.141593e+00` (Use a precision operator to specify the number of digits after the decimal point.)

Value Type	Conversion	Details
	`%E`	Same as `%e`, but uppercase, such as `3.141593E+00` (Use a precision operator to specify the number of digits after the decimal point.)
	`%g`	The more compact of `%e` or `%f`, with no trailing zeros (Use a precision operator to specify the number of significant digits.)
	`%G`	The more compact of `%E` or `%f`, with no trailing zeros (Use a precision operator to specify the number of significant digits.)
Characters or strings	`%c`	Single character
	`%s`	Character vector or string array. The type of the output text is the same as the type of `formatSpec`.

Optional Operators

The optional identifier, flags, field width, precision, and subtype operators further define the format of the output text.

- **Identifier**

  Order for processing the function input arguments. Use the syntax *n*$, where *n* represents the positions of the other input arguments in the function call.

  Example: `('%3$s %2$s %1$s %2$s','A','B','C')` prints input arguments `'A'`, `'B'`, `'C'` as follows: `C B A B`.

  Note: If an input argument is an array, you cannot use identifiers to specify particular array elements from that input argument.

- **Flags**

`'–'`	Left-justify. **Example:** `%-5.2f` **Example:** `%-10s`
`'+'`	Always print a sign character (+ or –) for any numeric value. **Example:** `%+5.2f`

	Right-justify text. **Example:** `%+10s`
`' '`	Insert a space before the value. **Example:** `% 5.2f`
`'0'`	Pad to field width with zeros before the value. **Example:** `%05.2f`
`'#'`	Modify selected numeric conversions: • For `%o`, `%x`, or `%X`, print `0`, `0x`, or `0X` prefix. • For `%f`, `%e`, or `%E`, print decimal point even when precision is 0. • For `%g` or `%G`, do not remove trailing zeros or decimal point. **Example:** `%#5.0f`

- **Field Width**

  Minimum number of characters to print. The field width operator can be a number, or an asterisk (`*`) to refer to an input argument.

  Example: The input arguments `('%12d',intmax)` are equivalent to `('%*d', 12, intmax)`.

  The function pads to field width with spaces before the value unless otherwise specified by flags.

- **Precision**

For `%f`, `%e`, or `%E`	Number of digits to the right of the decimal point **Example:** `'%.4f'` prints `pi` as `'3.1416'`
For `%g` or `%G`	Number of significant digits **Example:** `'%.4g'` prints `pi` as `' 3.142'`

  The precision operator can be a number, or an asterisk (`*`) to refer to an argument.

  Example: The input arguments `('%6.4f', pi)` are equivalent to `('%*.*f', 6, 4, pi)`.

Note: If you specify a precision operator for floating-point values that exceeds the precision of the input numeric data type, the results might not match the input values

to the precision you specified. The result depends on your computer hardware and operating system.

- **Subtypes**

  You can use a subtype operator to print a floating-point value as its octal, decimal, or hexadecimal value. The subtype operator immediately precedes the conversion character. This table shows the conversions that can use subtypes.

Input Value Type	Subtype and Conversion Character	Output Value Type

Floating-point number	`%bx` or `%bX`
	`%bo`
	`%bu`
		Double-precision hexadecimal, octal, or decimal value
		Example: `%bx` prints `pi` as `400921fb54442d18`

	`%tx` or `%tX`
	`%to`
	`%tu`
		Single-precision hexadecimal, octal, or decimal value
		Example: `%tx` prints `pi` as `40490fdb`

Text Before or After Formatting Operators

`formatSpec` can also include additional text before a percent sign, `%`, or after a conversion character. The text can be:

- Ordinary text to print.
- Special characters that you cannot enter as ordinary text. This table shows how to represent special characters in `formatSpec`.

Special Character	Representation
Single quotation mark	`''`
Percent character	`%%`
Backslash	`\\`
Alarm	`\a`
Backspace	`\b`
Form feed	`\f`

Special Character	Representation
New line	`\n`
Carriage return	`\r`
Horizontal tab	`\t`
Vertical tab	`\v`
Character whose Unicode numeric value can be represented by the hexadecimal number, `N`	`\xN` **Example:** `sprintf('\x5A')` returns `'Z'`
Character whose Unicode numeric value can be represented by the octal number, `N`	`\N` **Example:** `sprintf('\132')` returns `'Z'`

Notable Behavior of Conversions with Formatting Operators

- Numeric conversions print only the real component of complex numbers.
- If you specify a conversion that does not fit the data, such as a text conversion for a numeric value, MATLAB overrides the specified conversion, and uses `%e`.

  Example: `'%s'` converts `pi` to `3.141593e+00`.
- If you apply a text conversion (either `%c` or `%s`) to integer values, MATLAB converts values that correspond to valid character codes to characters.

  Example: `'%s'` converts `[65 66 67]` to `ABC`.

Data Types: `char` | `string`

`A1,...,An` — Numeric or character arrays

scalar | vector | matrix | multidimensional array

Numeric or character arrays, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`

Output Arguments

`nbytes` — Number of bytes
scalar

Number of bytes that `fprintf` writes, returned as a scalar. When writing to a file, `nbytes` is determined by the character encoding. When printing data to the screen, `nbytes` is the number of characters displayed on the screen.

Tips

- Format specifiers for the reading functions `sscanf` and `fscanf` differ from the formats for the writing functions `sprintf` and `fprintf`. The reading functions do not support a precision field. The width field specifies a minimum for writing, but a maximum for reading.

References

[1] Kernighan, B. W., and D. M. Ritchie, *The C Programming Language*, Second Edition, Prentice-Hall, Inc., 1988.

[2] ANSI specification X3.159-1989: "Programming Language C," ANSI, 1430 Broadway, New York, NY 10018.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support:
  - `b` and `t` subtypes on `%u`, `%o` `%x`, and `%X` formats.

  - $ flag for reusing input arguments.
  - Printing arrays.
- There is no automatic casting. Input arguments must match their format types for predictable results.
- Escape characters are limited to the decimal range of 0–127.
- A call to fprintf with fileID equal to 1 or 2 becomes printf in the generated C/C++ code in the following cases:
  - The fprintf call is inside a parfor loop.
  - Extrinsic calls are disabled.
- When the MATLAB behavior differs from the C compiler behavior, fprintf matches the C compiler behavior in the following cases:
  - The format specifier has a corresponding C format specifier, for example, %e or %E.
  - The fprintf call is inside a parfor loop.
  - Extrinsic calls are disabled.
- When you call fprintf with the format specifier %s, do not put a null character in the middle of the input character vector. To write a null character, use fprintf(fid, '%c', char(0)).
- When you call fprintf with an integer format specifier, the type of the integer argument must be a type that the target hardware can represent as a native C type. For example, if you call fprintf('%d', int64(n)), then the target hardware must have a native C type that supports a 64-bit integer.

See Also

See Also

disp | fclose | ferror | fopen | fread | fscanf | fseek | ftell | fwrite | sprintf

Topics

"Export Cell Array to Text File"
"Append To or Overwrite Existing Text Files"
"Formatting Text"

Introduced before R2006a

fprintf (serial)

Write text to device

Syntax

```
fprintf(obj,'cmd')
fprintf(obj,'format','cmd')
fprintf(obj,'cmd','mode')
fprintf(obj,'format','cmd','mode')
```

Description

`fprintf(obj,'cmd')` writes the string `cmd` to the device connected to the serial port object, `obj`. The default format is `%s\n`. The write operation is synchronous and blocks the command line until execution completes.

`fprintf(obj,'format','cmd')` writes the string using the format specified by *`format`*.

`fprintf(obj,'cmd','mode')` writes the string with command-line access specified by *`mode`*. *`mode`* specifies if `cmd` is written synchronously or asynchronously.

`fprintf(obj,'format','cmd','mode')` writes the string using the specified format. *`format`* is a C language conversion specification.

You need an open connection from the serial port object, `obj`, to the device before performing read or write operations.

To open a connection to the device, use the `fopen` function. When `obj` has an open connection to the device, it has a `Status` property value of `open`. Refer to "Troubleshooting Common Errors" for `fprintf` errors.

To understand the use of `fprintf`, refer to "Completing a Write Operation with fprintf" and "Rules for Writing the Terminator".

Input Arguments

format

ANSI C conversion specification includes these conversion characters.

Specifier	Description
%c	Single character
%d or %i	Decimal notation (signed)
%e	Exponential notation (using lowercase e as in 3.1415e+00)
%E	Exponential notation (using uppercase E as in 3.1415E+00)
%f	Fixed-point notation
%g	The more compact of %e or %f. Insignificant zeros do not print.
%G	Same as %g, but using uppercase E
%o	Octal notation (unsigned)
%s	String of characters
%u	Decimal notation (unsigned)
%x	Hexadecimal notation (using lowercase letters a–f)
%X	Hexadecimal notation (using uppercase letters A–F)

mode

Specifies whether the string cmd is written synchronously or asynchronously:

- sync: cmd is written synchronously and the command line is blocked.
- async: cmd is written asynchronously and the command line is not blocked.

If *mode* is not specified, the write operation is synchronous.

If you specify asynchronous *mode*, when the write operation occurs:

- The BytesToOutput property value continuously updates to reflect the number of bytes in the output buffer.
- The MATLAB file callback function specified for the OutputEmptyFcn property is executed when the output buffer is empty.

To determine whether an asynchronous write operation is in progress, use the `TransferStatus` property.

For more information on synchronous and asynchronous write operations, see Controlling Access to the MATLAB Command Line.

Examples

Create a serial port object `s` and connect it to a Tektronix TDS 210 oscilloscope. Write the `RS232?` command with `fprintf`. `RS232?` instructs the scope to return serial port communications settings. This example works on a Windows platform.

```
s = serial('COM1');
fopen(s)
fprintf(s,'RS232?')
```

Specify a format for the data that does not include the terminator, or configure the terminator to empty.

```
s = serial('COM1');
fopen(s)
fprintf(s,'%s','RS232?')
```

The default format for `fprintf` is `%s\n`. Therefore, the terminator specified by the `Terminator` property is automatically written. However, sometimes you might want to suppress writing the terminator.

Specify an array of formats and commands:

```
s = serial('COM1');
fopen(s)
fprintf(s,['ch:%d scale:%d'],[1 20e-3],'sync')
```

Tutorials

- Writing and Reading Data
- Controlling Access to the MATLAB Command Line

See Also

`fopen` | `fwrite` | `stopasync` | `BytesToOutput` | `OutputBufferSize` | `OutputEmptyFcn` | `Status` | `TransferStatus` | `ValuesSent`

Topics

Writing and Reading Data
Controlling Access to the MATLAB Command Line

Introduced before R2006a

frame2im

Return image data associated with movie frame

Syntax

```
[X,Map] = frame2im(F)
```

Description

`[X,Map] = frame2im(F)` returns the indexed image data `X` and associated colormap `Map` from the single movie frame `F`. The output `Map` is a three-column matrix where each row of the matrix is an RGB triplet value that defines one color of the colormap. If the frame contains true-color data, then `Map` is empty. The functions `getframe` and `im2frame` create a movie frame.

Examples

Convert Movie Frame to Image Data

Create a surface plot.

```
surf(peaks)
```

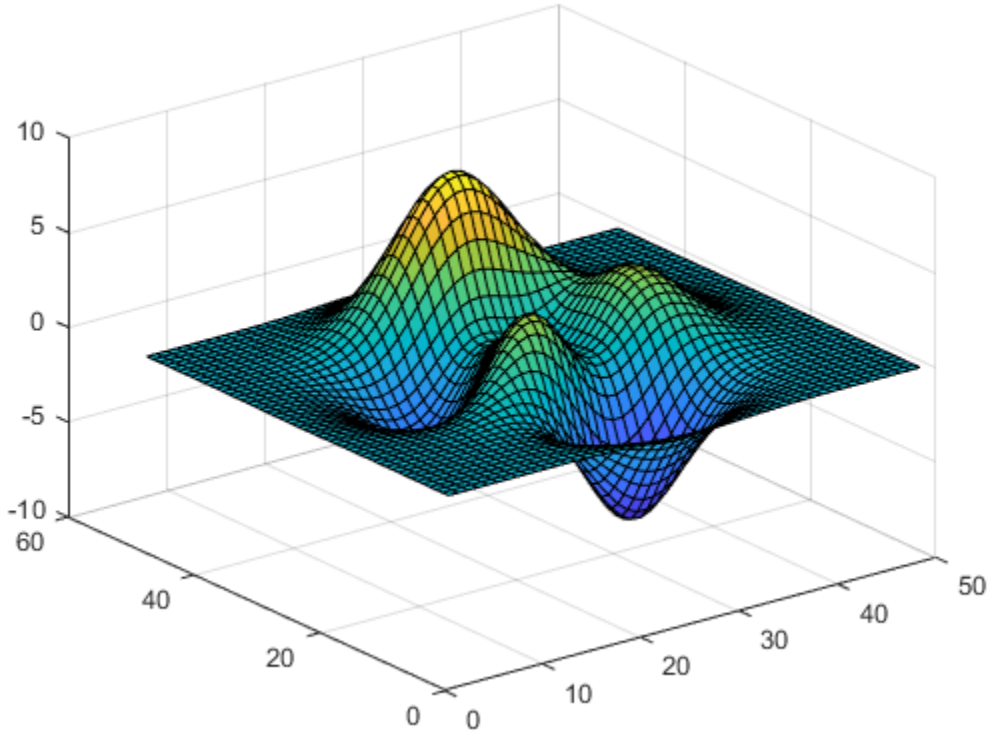

Use `getframe` to capture the plot as a movie frame. Then, convert the captured movie frame to image data.

```
F = getframe;
[X,map] = frame2im(F);
```

See Also

`movie` | `getframe` | `im2frame` | `ind2rgb`

Introduced before R2006a

fread

Read data from binary file

Syntax

```
A = fread(fileID)
A = fread(fileID,sizeA)
A = fread(fileID,sizeA,precision)
A = fread(fileID,sizeA,precision,skip)
A = fread(fileID,sizeA,precision,skip,machinefmt)
[A,count] = fread( ___ )
```

Description

`A = fread(fileID)` reads data from an open binary file into column vector `A` and positions the file pointer at the end-of-file marker. The binary file is indicated by the file identifier, `fileID`. Use `fopen` to open the file and obtain the `fileID` value. When you finish reading, close the file by calling `fclose(fileID)`.

`A = fread(fileID,sizeA)` reads file data into an array, `A`, with dimensions, `sizeA`, and positions the file pointer after the last value read. `fread` populates `A` in column order.

`A = fread(fileID,sizeA,precision)` interprets values in the file according to the form and size described by `precision`. The `sizeA` argument is optional.

`A = fread(fileID,sizeA,precision,skip)` skips the number of bytes or bits specified by `skip` after reading each value in the file. The `sizeA` argument is optional.

`A = fread(fileID,sizeA,precision,skip,machinefmt)` additionally specifies the order for reading bytes or bits in the file. The `sizeA` and `skip` arguments are optional.

`[A,count] = fread( ___ )` additionally returns the number of characters that `fread` reads into `A`. You can use this syntax with any of the input arguments of the previous syntaxes.

Examples

Read Entire File of uint8 Data

Write a nine-element vector to a sample file, `nine.bin`.

```
fileID = fopen('nine.bin','w');
fwrite(fileID,[1:9]);
fclose(fileID);
```

Read all the data in the file into a vector of class `double`. By default, `fread` reads a file 1 byte at a time, interprets each byte as an 8-bit unsigned integer (`uint8`), and returns a `double` array.

```
fileID = fopen('nine.bin');
A = fread(fileID)
```

```
A =

     1
     2
     3
     4
     5
     6
     7
     8
     9
```

`fread` returns a column vector, with one element for each byte in the file.

View information about `A`.

```
whos A
```

```
  Name      Size            Bytes  Class     Attributes

  A         9x1                72  double
```

Close the file.

```
fclose(fileID);
```

Read Entire File of Double-Precision Data

Create a file named `doubledata.bin`, containing nine double-precision values.

```
fileID = fopen('doubledata.bin','w');
fwrite(fileID,magic(3),'double');
fclose(fileID);
```

Open the file, `doubledata.bin`, and read the data in the file into a 3-by-3 array, `A`. Specify that the source data is class `double`.

```
fileID = fopen('doubledata.bin');
A = fread(fileID,[3 3],'double')
```

```
A =

     8     1     6
     3     5     7
     4     9     2
```

Close the file.

```
fclose(fileID);
```

Read Text File

Read the contents of the file, `fread.m`. Transpose the output array, `A` so that it is a row vector.

```
fileID = fopen('fread.m');
A = fread(fileID,'*char')';
fclose(fileID);
```

`fread` returns the character array, `A`.

Read Selected Rows or Columns from File

Create a file named `nine.bin`, containing the values from 1 to 9. Write the data as `uint16` values.

```
fileID = fopen('nine.bin','w');
fwrite(fileID,[1:9],'uint16');
fclose(fileID);
```

Read the first six values into a 3-by-2 array. Specify that the source data is class `uint16`.

```
fileID = fopen('nine.bin');
A = fread(fileID,[3,2],'uint16')
```

```
A =

     1     4
     2     5
     3     6
```

`fread` returns an array populated column-wise with the first six values from the file, `nine.bin`.

Return to the beginning of the file.

```
frewind(fileID)
```

Read two values at a time, and skip one value before reading the next values. Specify this format using the `precision` value, `'2*uint16'`. Because the data is class `uint16`, one value is represented by 2 bytes. Therefore, specify the `skip` argument as `2`.

```
precision = '2*uint16';
skip = 2;
B = fread(fileID,[2,3],precision,skip)
```

```
B =

     1     4     7
     2     5     8
```

`fread` returns a 2-by-3 array populated column-wise with the values from `nine.bin`.

Close the file.

```
fclose(fileID);
```

Read Digits of Binary Coded Decimal Values

Create a file with binary coded decimal (BCD) values.

```
str = ['AB'; 'CD'; 'EF'; 'FA'];
```

```
fileID = fopen('bcd.bin','w');
fwrite(fileID,hex2dec(str),'ubit8');
fclose(fileID);
```

Read 1 byte at a time.

```
fileID = fopen('bcd.bin');
onebyte = fread(fileID,4,'*ubit8');
```

Display the BCD values.

```
disp(dec2hex(onebyte))
```

```
AB
CD
EF
FA
```

Return to the beginning of the file using `frewind`. If you read 4 bits at a time on a little-endian system, your results appear in the wrong order.

```
frewind(fileID)

err = fread(fileID,8,'*ubit4');
disp(dec2hex(err))
```

```
B
A
D
C
F
E
A
F
```

Return to the beginning of the file using `frewind`. Read the data 4 bits at a time as before, but specify a big-endian ordering to display the correct results.

```
frewind(fileID)

correct = fread(fileID,8,'*ubit4','ieee-be');
disp(dec2hex(correct))
```

```
A
B
C
```

```
D
E
F
F
A
```

Close the file.

```
fclose(fileID);
```

Input Arguments

`fileID` — File identifier

integer

File identifier of an open binary file, specified as an integer. Before reading a file with `fread`, you must use `fopen` to open the file and obtain the `fileID`.

Data Types: `double`

`sizeA` — Dimensions of output array

`Inf` (default) | integer | two-element row vector

Dimensions of the output array, `A`, specified as `Inf`, an integer, or a two-element row vector.

Form of the `sizeA` Input	Dimensions of the output array, `A`
`Inf`	Column vector, with each element containing a value in the file.
`n`	Column vector with `n` elements.
`[m,n]`	`m`-by-`n` matrix, filled in column order. `n` can be `Inf`, but `m` cannot.

`precision` — Class and size of values to read

`'uint8=>double'` (default) | character vector or string scalar

Class and size in bits of the values to read, specified as a character vector or a string scalar in one of the following forms. Optionally the input specifies the class of the output matrix, `A`.

Form of the `precision` Input	Description
`source`	Input values are of the class specified by *`source`*. Output matrix A is class `double`. Example: `'int16'`
`source=>output`	Input values are of the class specified by *`source`*. The class of the output matrix, A, is specified by *`output`*. Example: `'int8=>char'`
`*source`	The input values and the output matrix, A, are of the class specified by *`source`*. For `bit`*n* or `ubit`*n* precisions, the output has the smallest class that can contain the input. Example: `'*ubit18'` This is equivalent to `'ubit18=>uint32'`
`N*source` or *`N*source=>output`*	Read *N* values before skipping the number of bytes specified by the `skip` argument. Example: `'4*int8'`

The following table shows possible values for *`source`* and *`output`*.

Value Type	Precision	Bits (Bytes)
Integers, unsigned	`'uint'`	32 (4)
	`'uint8'`	8 (1)
	`'uint16'`	16 (2)
	`'uint32'`	32 (4)
	`'uint64'`	64 (8)
	`'uchar'`	8 (1)
	`'unsigned char'`	8 (1)
	`'ushort'`	16 (2)
	`'ulong'`	32 (4)
	`'ubit`*n*`'`	$1 \le n \le 64$
Integers, signed	`'int'`	32 (4)

Value Type	Precision	Bits (Bytes)
	'int8'	8 (1)
	'int16'	16 (2)
	'int32'	32 (4)
	'int64'	64 (8)
	'integer*1'	8 (1)
	'integer*2'	16 (2)
	'integer*4'	32 (4)
	'integer*8'	64 (8)
	'schar'	8 (1)
	'signed char'	8 (1)
	'short'	16 (2)
	'long'	32 (4)
	'bit*n*'	$1 \le n \le 64$
Floating-point numbers	'single'	32 (4)
	'double'	64 (8)
	'float'	32 (4)
	'float32'	32 (4)
	'float64'	64 (8)
	'real*4'	32 (4)
	'real*8'	64 (8)
Characters	'char*1'	8 (1)
	'char'	Depends on the encoding scheme associated with the file. Set encoding with `fopen`.

For most values of *source*, if `fread` reaches the end of the file before reading a complete value, it does not return a result for the final value. However, if *source* is `bit`*n* or `ubit`*n*, then `fread` returns a partial result for the final value.

Note: To preserve `NaN` and `Inf` values in MATLAB, read and write data of class `double` or `single`.

Data Types: `char` | `string`

`skip` — Number of bytes to skip

0 (default) | scalar

Number of bytes to skip after reading each value, specified as a scalar. If you specify a `precision` of `bit`*n* or `ubit`*n*, specify `skip` in bits.

Use the `skip` argument to read data from noncontiguous fields in fixed-length records.

`machinefmt` — Order for reading bytes

`'n'` (default) | `'b'` | `'l'` | `'s'` | `'a'` | ...

Order for reading bytes in the file, specified as a character vector or a string scalar. Specify `machinefmt` as one of the values in the table that follows. For `bit`*n* and `ubit`*n* precisions, `machinefmt` specifies the order for reading bits within a byte, but the order for reading bytes remains your system byte ordering.

`'n'` or `'native'`	Your system byte ordering (default)
`'b'` or `'ieee-be'`	Big-endian ordering
`'l'` or `'ieee-le'`	Little-endian ordering
`'s'` or `'ieee-be.l64'`	Big-endian ordering, 64-bit long data type
`'a'` or `'ieee-le.l64'`	Little-endian ordering, 64-bit long data type

By default, all currently supported platforms use little-endian ordering for new files. Existing binary files can use either big-endian or little-endian ordering.

Data Types: `char` | `string`

Output Arguments

`A` — File data

column vector | matrix

File data, returned as a column vector. If you specified the `sizeA` argument, then `A` is a matrix of the specified size. Data in `A` is class `double` unless you specify a different class in the `precision` argument.

`count` — Number of characters read
scalar

Number of characters read, returned as a scalar value.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The input argument `precision` must be a constant.
- The `source` and `output` classes that `precision` specifies cannot have these values: `'long'`, `'ulong'`, `'unsigned long'`, `'bit*n*'`, or `'ubit*n*'`.
- You cannot use the `machinefmt` input.
- If the `source` or `output` that `precision` specifies is a C type, for example, `int`, then the target and production sizes for that type must:
  - Match.
  - Map directly to a MATLAB type.
- The `source` type that `precision` specifies must map directly to a C type on the target hardware.
- If the `fread` call reads the entire file, then all of the data must fit in the largest array available for code generation.
- If `sizeA` is not constant or contains a nonfinite element, then dynamic memory allocation is required.
- The code generator for the `fread` function treats the `char` value for `source` or `output` as a signed `8`-bit integer. Use values between `0` and `127` only.
- The generated code does not report file read errors. Therefore, you must write your own file read error handling in your MATLAB code. In your error handling code,

consider checking that the number of bytes read matches the number of bytes that you requested. For example:

```
...
N = 100;
[vals, numRead] = fread(fid, N, '*double');
if numRead ~= N
    % fewer elements read than expected
end
...
```

See Also

See Also

fclose | fgetl | fopen | fprintf | fscanf | fseek | ftell | fwrite

Topics

"Reading Portions of a File"
"Reading Files Created on Other Systems"

Introduced before R2006a

fread (serial)

Read binary data from device

Syntax

```
A = fread(obj)
A = fread(obj,size,'precision')
[A,count] = fread(...)
[A,count,msg] = fread(...)
```

Description

`A = fread(obj)` and `A = fread(obj,size)` read binary data from the device connected to the serial port object, `obj`, and returns the data to `A`. The maximum number of values to read is specified by `size`. If `size` is not specified, the maximum number of values to read is determined by the object's `InputBufferSize` property. Valid options for `size` are:

`n`	Read at most `n` values into a column vector.
`[m,n]`	Read at most m-by-n values filling an m–by–n matrix in column order.

`size` cannot be `inf`, and an error is returned if the specified number of values cannot be stored in the input buffer. You specify the size, in bytes, of the input buffer with the `InputBufferSize` property. A value is defined as a byte multiplied by the *`precision`* (see below).

`A = fread(obj,size,'precision')` reads binary data with precision specified by *`precision`*.

`precision` controls the number of bits read for each value and the interpretation of those bits as integer, floating-point, or character values. If *`precision`* is not specified, `uchar` (an 8-bit unsigned character) is used. By default, numeric values are returned in double-precision arrays. The supported values for *`precision`* are listed below in Tips.

`[A,count] = fread(...)` returns the number of values read to `count`.

`[A,count,msg] = fread(...)` returns a warning message to `msg` if the read operation was unsuccessful.

Tips

Before you can read data from the device, it must be connected to `obj` with the `fopen` function. A connected serial port object has a `Status` property value of `open`. An error is returned if you attempt to perform a read operation while `obj` is not connected to the device.

If `msg` is not included as an output argument and the read operation was not successful, then a warning message is returned to the command line.

The `ValuesReceived` property value is increased by the number of values read, each time `fread` is issued.

Rules for Completing a Binary Read Operation

A read operation with `fread` blocks access to the MATLAB command line until:

- The specified number of values are read.
- The time specified by the `Timeout` property passes.

Note The `Terminator` property is not used for binary read operations.

Supported Precisions

The supported values for *`precision`* are listed below.

Data Type	Precision	Interpretation
Character	`uchar`	8-bit unsigned character
	`schar`	8-bit signed character
	`char`	8-bit signed or unsigned character
Integer	`int8`	8-bit integer
	`int16`	16-bit integer

Data Type	Precision	Interpretation
	`int32`	32-bit integer
	`uint8`	8-bit unsigned integer
	`uint16`	16-bit unsigned integer
	`uint32`	32-bit unsigned integer
	`short`	16-bit integer
	`int`	32-bit integer
	`long`	32- or 64-bit integer
	`ushort`	16-bit unsigned integer
	`uint`	32-bit unsigned integer
	`ulong`	32- or 64-bit unsigned integer
Floating-point	`single`	32-bit floating point
	`float32`	32-bit floating point
	`float`	32-bit floating point
	`double`	64-bit floating point
	`float64`	64-bit floating point

See Also

`fgetl` | `fopen` | `fscanf` | `fgets` | `BytesAvailable` | `BytesAvailableFcn` | `InputBufferSize` | `Status` | `Terminator` | `ValuesReceived`

Introduced before R2006a

freeBoundary

Class: TriRep

(Not recommended) Facets referenced by only one simplex

Note: `freeBoundary(TriRep)` is not recommended. Use freeBoundary(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
FF = freeBoundary(TR)
[FF XF] = freeBoundary(TR)
```

Description

`FF = freeBoundary(TR)` returns a matrix `FF` that represents the free boundary facets of the triangulation. A facet is on the free boundary if it is referenced by only one simplex (triangle/tetrahedron, etc). `FF` is of size `m`-by-`n`, where m is the number of boundary facets and n is the number of vertices per facet. The vertices of the facets index into the array of points representing the vertex coordinates `TR.X`. The array `FF` could be empty as in the case of a triangular mesh representing the surface of a sphere.

`[FF XF] = freeBoundary(TR)` returns a matrix of free boundary facets

Input Arguments

`TR`	Triangulation representation.

Output Arguments

`FF`	`FF` that has vertices defined in terms of a compact array of coordinates `XF`.

`XF`	`XF` is of size `m`-by-`ndim` where `m` is the number of free facets, and `ndim` is the dimension of the space where the triangulation resides

Examples

Example 1

Use `TriRep` to compute the boundary triangulation of an imported triangulation.

Load a 3-D triangulation:

```
load tetmesh;
trep = TriRep(tet, X);
```

Compute the boundary triangulation:

```
 [tri xf] = freeBoundary(trep);
```

Plot the boundary triangulation:

```
trisurf(tri, xf(:,1),xf(:,2),xf(:,3), ...
     'FaceColor','cyan', 'FaceAlpha', 0.8);
```

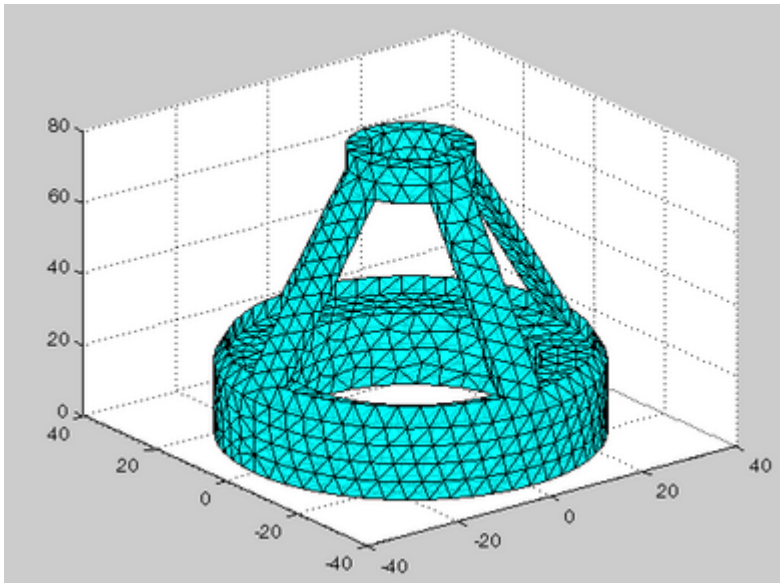

Example 2

Perform a direct query of a 2-D triangulation created with `DelaunayTri`.

Plot the mesh:

```
x = rand(20,1);
y = rand(20,1);
dt = DelaunayTri(x,y);
fe = freeBoundary(dt)';
triplot(dt);
hold on;
```

Display the free boundary edges in red:

```
plot(x(fe), y(fe), '-r', 'LineWidth',2) ;
hold off;
```

In this instance the free edges correspond to the convex hull of `(x, y)`.

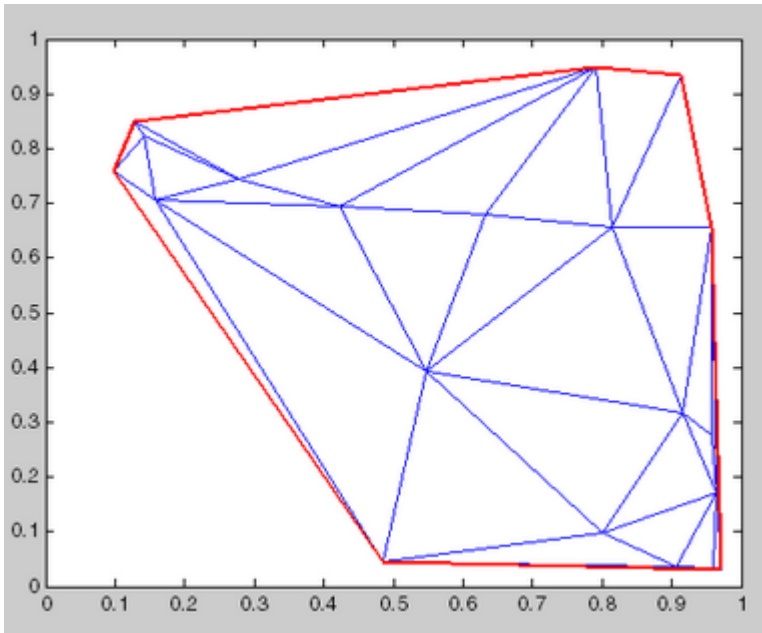

Definitions

Simplex

A *simplex* is a triangle/tetrahedron or higher-dimensional equivalent.

Facet

A *facet* is an edge of a triangle or a face of a tetrahedron.

See Also

convexHull | featureEdges | triangulation | delaunayTriangulation | faceNormal

freqspace

Frequency spacing for frequency response

Syntax

```
[f1,f2] = freqspace(n)
[f1,f2] = freqspace([m n])
[x1,y1] = freqspace(...,'meshgrid')
f = freqspace(N)
f = freqspace(N,'whole')
```

Description

`freqspace` returns the implied frequency range for equally spaced frequency responses. `freqspace` is useful when creating desired frequency responses for various one- and two-dimensional applications.

`[f1,f2] = freqspace(n)` returns the two-dimensional frequency vectors `f1` and `f2` for an `n`-by-`n` matrix.

For `n` odd, both `f1` and `f2` are `[-n+1:2:n-1]/n`.

For `n` even, both `f1` and `f2` are `[-n:2:n-2]/n`.

`[f1,f2] = freqspace([m n])` returns the two-dimensional frequency vectors `f1` and `f2` for an `m`-by-`n` matrix.

`[x1,y1] = freqspace(...,'meshgrid')` is equivalent to

```
[f1,f2] = freqspace(...);
[x1,y1] = meshgrid(f1,f2);
```

`f = freqspace(N)` returns the one-dimensional frequency vector `f` assuming `N` evenly spaced points around the unit circle. For `N` even or odd, `f` is `(0:2/N:1)`. For `N` even, `freqspace` therefore returns `(N+2)/2` points. For `N` odd, it returns `(N+1)/2` points.

`f = freqspace(N,'whole')` returns `N` evenly spaced points around the whole unit circle. In this case, `f` is `0:2/N:2*(N-1)/N`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`meshgrid`

Introduced before R2006a

frewind

Move file position indicator to beginning of open file

Syntax

```
frewind(fileID)
```

Description

`frewind(fileID)` sets the file position indicator to the beginning of a file. *`fileID`* is an integer file identifier obtained from `fopen`.

If the file is on a tape device and the rewind operation fails, `frewind` does not return an error message.

Alternatives

`frewind(fileID)` is equivalent to:

```
fseek(fileID, 0, 'bof');
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`fclose` | `feof` | `ferror` | `fopen` | `fseek` | `ftell` | `fscanf` | `fprintf` | `fread` | `fwrite`

Introduced before R2006a

fscanf

Read data from text file

Syntax

```
A = fscanf(fileID,formatSpec)
A = fscanf(fileID,formatSpec,sizeA)
[A,count] = fscanf( ___ )
```

Description

`A = fscanf(fileID,formatSpec)` reads data from an open text file into column vector `A` and interprets values in the file according to the format specified by `formatSpec`. The `fscanf` function reapplies the format throughout the entire file and positions the file pointer at the end-of-file marker. If `fscanf` cannot match `formatSpec` to the data, it reads only the portion that matches and stops processing.

The text file is indicated by the file identifier, `fileID`. Use `fopen` to open the file, specify the character encoding, and obtain the `fileID` value. When you finish reading, close the file by calling `fclose(fileID)`.

`A = fscanf(fileID,formatSpec,sizeA)` reads file data into an array, `A`, with dimensions, `sizeA`, and positions the file pointer after the last value read. `fscanf` populates `A` in column order. `sizeA` must be a positive integer or have the form `[m n]`, where `m` and `n` are positive integers.

`[A,count] = fscanf( ___ )` additionally returns the number of fields that `fscanf` reads into `A`. For numeric data, this is the number of values read. You can use this syntax with any of the input arguments of the previous syntaxes.

Examples

Read File Contents into Column Vector

Create a sample text file that contains floating-point numbers.

```
x = 100*rand(8,1);
fileID = fopen('nums1.txt','w');
fprintf(fileID,'%4.4f\n',x);
fclose(fileID);
```

View the contents of the file.

```
type nums1.txt
```

```
81.4724
90.5792
12.6987
91.3376
63.2359
9.7540
27.8498
54.6882
```

Open the file for reading, and obtain the file identifier, `fileID`.

```
fileID = fopen('nums1.txt','r');
```

Define the format of the data to read. Use `'%f'` to specify floating-point numbers.

```
formatSpec = '%f';
```

Read the file data, filling output array, `A`, in column order. `fscanf` reapplies the format, `formatSpec`, throughout the file.

```
A = fscanf(fileID,formatSpec)
```

```
A =

   81.4724
   90.5792
   12.6987
   91.3376
   63.2359
    9.7540
   27.8498
   54.6882
```

`A` is a column vector containing data from the file.

Close the file.

```
fclose(fileID);
```

Read File Contents into Array

Create a sample text file that contains integers and floating-point numbers.

```
x = 1:1:5;
y = [x;rand(1,5)];
fileID = fopen('nums2.txt','w');
fprintf(fileID,'%d %4.4f\n',y);
fclose(fileID);
```

View the contents of the file.

```
type nums2.txt
```

```
1 0.8147
2 0.9058
3 0.1270
4 0.9134
5 0.6324
```

Open the file for reading, and obtain the file identifier, `fileID`.

```
fileID = fopen('nums2.txt','r');
```

Define the format of the data to read and the shape of the output array.

```
formatSpec = '%d %f';
sizeA = [2 Inf];
```

Read the file data, filling output array, `A`, in column order. `fscanf` reuses the format, `formatSpec`, throughout the file.

```
A = fscanf(fileID,formatSpec,sizeA)
```

```
A =

    1.0000    2.0000    3.0000    4.0000    5.0000
    0.8147    0.9058    0.1270    0.9134    0.6324
```

```
fclose(fileID);
```

Transpose the array so that A matches the orientation of the data in the file.

```
A = A'
```

```
A =

    1.0000    0.8147
    2.0000    0.9058
    3.0000    0.1270
    4.0000    0.9134
    5.0000    0.6324
```

Skip Specific Characters in File

Skip specific characters in a sample file, and return only numeric data.

Create a sample text file containing temperature values.

```
str = '78°C 72°C 64°C 66°C 49°C';
fileID = fopen('temperature.dat','w');
fprintf(fileID,'%s',str);
fclose(fileID);
```

Read the numbers in the file, skipping the text, °C. Also return the number of values that `fscanf` reads. The extended ASCII code 176 represents the degree sign.

```
fileID = fopen('temperature.dat','r');
degrees = char(176);
[A,count] = fscanf(fileID, ['%d' degrees 'C'])
fclose(fileID);
```

```
A =

    78
    72
    64
    66
    49


count =

     5
```

A is a vector containing the numeric values in the file. `count` indicates that `fscanf` read five values.

Input Arguments

`fileID` — File identifier

integer

File identifier of an open text file, specified as an integer. Before reading a file with `fscanf`, you must use `fopen` to open the file and obtain the `fileID`.

Data Types: `double`

`formatSpec` — Format of data fields

character vector | string scalar

Format of the data fields in the file, specified as a character vector or string scalar of one or more conversion specifiers. When `fscanf` reads a file, it attempts to match the data to the format specified by `formatSpec`.

Numeric Fields

This table lists available conversion specifiers for numeric inputs. `fscanf` converts values to their decimal (base 10) representation.

Numeric Field Type	Conversion Specifier	Details
Integer, signed	`%d`	Base 10
	`%i`	The values in the file determine the base: • The default is base 10. • If the initial digits are `0x` or `0X`, then the values are hexadecimal (base 16). • If the initial digit is `0`, then values are octal (base 8).
	`%ld` or `%li`	64-bit values, base 10, 8, or 16
Integer, unsigned	`%u`	Base 10
	`%o`	Base 8 (octal)

Numeric Field Type	Conversion Specifier	Details
	`%x`	Base 16 (hexadecimal)
	`%lu`, `%lo`, `%lx`	64-bit values, base 10, 8, or 16
Floating-point number	`%f`	Floating-point fields can contain any of the following (not case sensitive): `Inf`, `-Inf`, `NaN`, or `-NaN`.
	`%e`	
	`%g`	

Character Fields

This table lists available conversion specifiers for character inputs.

Character Field Type	Conversion Specifier	Description
Character vector or string scalar	`%s`	Read the text until `fscanf` encounters white space.
	`%c`	Read any single character, including white space. To read multiple characters at a time, specify field width.
Pattern-matching	`%[...]`	Read only characters in the brackets up to the first nonmatching character or white space. Example: `%[mus]` reads `'summer '` as `'summ'`.

If `formatSpec` contains a combination of numeric and character specifiers, then `fscanf` converts each character to its numeric equivalent. This conversion occurs even when the format explicitly skips all numeric values (for example, `formatSpec` is `'%*d %s'`).

Optional Operators

- Fields and Characters to Ignore

  `fscanf` reads all numeric values and characters in your file in sequence, unless you tell it to ignore a particular field or a portion of a field. To skip fields, insert an asterisk (`*`) after the percent sign (`%`). For example, to skip integers, specify `%*d`.

- Field Width

  To specify the maximum number of digits or text characters to read at a time, insert a number after the percent character. For example, `%10c` reads up to 10 characters at a time, including white space. `%4f` reads up to 4 digits at a time, including the decimal point.

- Literal Text to Ignore

  `fscanf` ignores specified text appended to the `formatSpec` conversion specifier.

  Example: `Level%u` reads `'Level1'` as `1`.

  Example: `%uStep` reads `'2Step'` as `2`.

`sizeA` — Dimensions of output array

`Inf` (default) | integer | two-element row vector

Dimensions of the output array, `A`, specified as `Inf`, an integer, or a two-element row vector.

Form of the `sizeA` Input	Description
`Inf`	Read to the end of the file. For numeric data, the output, `A`, is a column vector. For text data, `A` is a character vector.
n	Read at most *n* numeric values or character fields. For numeric data, the output, `A`, is a column vector. For text data, `A`, is a character vector.
[*m*,*n*]	Read at most *m**n numeric values or character fields. *n* can be `Inf`, but *m* cannot. The output, `A`, is `m`-by-`n`, filled in column order.

Output Arguments

`A` — File data

column vector | matrix | character vector | character array

File data, returned as a column vector, matrix, character vector or character array. The class and size of `A` depend on the `formatSpec` input:

- If `formatSpec` contains only numeric specifiers, then `A` is numeric. If you specify the `sizeA` argument, then `A` is a matrix of the specified size. Otherwise, `A` is a column vector. If the input contains fewer than `sizeA` values, then `fscanf` pads `A` with zeros.
  - If `formatSpec` contains only 64-bit signed integer specifiers, then `A` is of class `int64`.
  - If `formatSpec` contains only 64-bit unsigned integer specifiers, then `A` is of class `uint64`.
  - Otherwise, `A` is of class `double`.
- If `formatSpec` contains only character or text specifiers (`%c` or `%s`), then `A` is a character array. If you specify `sizeA` and the input contains fewer characters, then `fscanf` pads `A` with `char(0)`.
- If `formatSpec` contains a combination of numeric and character specifiers, then `A` is numeric, of class `double`, and `fscanf` converts each text characters to its numeric equivalent. This occurs even when `formatSpec` explicitly skips all numeric fields (for example, `formatSpec` is `'%*d %s'`).
- If MATLAB cannot match the file data to `formatSpec`, then `A` can be numeric or a character array. The class of `A` depends on the values that `fscanf` reads before it stops processing.

`count` — Number of characters read
scalar

Number of characters read, returned as a scalar value.

Tips

- Format specifiers for the reading functions `sscanf` and `fscanf` differ from the formats for the writing functions `sprintf` and `fprintf`. The reading functions do not support a precision field. The width field specifies a minimum for writing but a maximum for reading.

Algorithms

MATLAB reads characters using the encoding scheme associated with the file. You specify the encoding when you open the file using the `fopen` function.

See Also

See Also

`fgetl` | `fgets` | `fopen` | `fprintf` | `fread` | `sscanf` | `textscan`

Topics

"Reading Data in a Formatted Pattern"
"Opening Files with Different Character Encodings"

Introduced before R2006a

fscanf (serial)

Read ASCII data from device, and format as text

Syntax

```
A = fscanf(obj)
A = fscanf(obj,'format')
A = fscanf(obj,'format',size)
[A,count] = fscanf(...)
[A,count,msg] = fscanf(...)
```

Description

`A = fscanf(obj)` reads ASCII data from the device connected to the serial port object, `obj`, and returns it to `A`. The data is converted to text using the `%c` format. For binary data, use `fread`.

`A = fscanf(obj,'format')` reads data and converts it according to *`format`*. *`format`* is a C language conversion specification. Conversion specifications involve the `%` character and the conversion characters d, i, o, u, x, X, f, e, E, g, G, c, and s. Refer to the `sscanf` file I/O format specifications or a C manual for more information.

`A = fscanf(obj,'format',size)` reads the number of values specified by `size`. Valid options for `size` are:

`n`	Read at most `n` values into a column vector.
`[m,n]`	Read at most m-by-n values filling an m–by–n matrix in column order.

`size` cannot be `inf`, and an error is returned if the specified number of values cannot be stored in the input buffer. If `size` is not of the form `[m,n]`, and a character conversion is specified, then `A` is returned as a row vector. You specify the size, in bytes, of the input buffer with the `InputBufferSize` property. An ASCII value is one byte.

`[A,count] = fscanf(...)` returns the number of values read to `count`.

`[A,count,msg] = fscanf(...)` returns a warning message to `msg` if the read operation did not complete successfully.

Examples

Create the serial port object `s` and connect `s` to a Tektronix TDS 210 oscilloscope, which is displaying sine wave. This example works on a Windows platform.

```
s = serial('COM1');
fopen(s)
```

Use the `fprintf` function to configure the scope to measure the peak-to-peak voltage of the sine wave, return the measurement type, and return the peak-to-peak voltage.

```
fprintf(s,'MEASUREMENT:IMMED:TYPE PK2PK')
fprintf(s,'MEASUREMENT:IMMED:TYPE?')
fprintf(s,'MEASUREMENT:IMMED:VALUE?')
```

Because the default value for the `ReadAsyncMode` property is `continuous`, data associated with the two query commands is automatically returned to the input buffer.

```
s.BytesAvailable
```

```
ans =
    21
```

Use `fscanf` to read the measurement type. The operation will complete when the first terminator is read.

```
meas = fscanf(s)
```

```
meas =
PK2PK
```

Use `fscanf` to read the peak-to-peak voltage as a floating-point number, and exclude the terminator.

```
pk2pk = fscanf(s,'%e',14)
```

```
pk2pk =
    2.0200
```

Disconnect `s` from the scope, and remove `s` from memory and the workspace.

```
fclose(s)
delete(s)
clear s
```

Tips

Before you can read data from the device, it must be connected to `obj` with the `fopen` function. A connected serial port object has a `Status` property value of `open`. An error is returned if you attempt to perform a read operation while `obj` is not connected to the device.

If `msg` is not included as an output argument and the read operation was not successful, then a warning message is returned to the command line.

The `ValuesReceived` property value is increased by the number of values read – including the terminator – each time `fscanf` is issued.

Rules for Completing a Read Operation with fscanf

A read operation with `fscanf` blocks access to the MATLAB command line until:

- The terminator specified by the `Terminator` property is read.
- The time specified by the `Timeout` property passes.
- The number of values specified by `size` is read.
- The input buffer is filled (unless `size` is specified)

See Also

`fgetl` | `fopen` | `fread` | `fgets` | `textscan` | `BytesAvailable` | `BytesAvailableFcn` | `InputBufferSize` | `Status` | `Terminator` | `Timeout`

Introduced before R2006a

fseek

Move to specified position in file

Syntax

```
fseek(fileID, offset, origin)
status = fseek(fileID, offset, origin)
```

Description

`fseek(fileID, offset, origin)` sets the file position indicator *`offset`* bytes from *`origin`* in the specified file.

`status` `= fseek(fileID, offset, origin)` returns `0` when the operation is successful. Otherwise, it returns `-1`.

Input Arguments

fileID

Integer file identifier obtained from `fopen`.

offset

Number of bytes to move from `origin`. Can be positive, negative, or zero. The *`n`* bytes of a given file are in positions `0` through *`n`*`-1`.

origin

Starting location in the file, specified as a character vector, string scalar or a scalar number:

`'bof'` or `-1`	Beginning of file
`'cof'` or `0`	Current position in file
`'eof'` or `1`	End of file

Examples

Copy 5 bytes from the file `test1.dat`, starting at the tenth byte, and append to the end of `test2.dat`:

```
% Create files test1.dat and test2.dat
% Each character uses 8 bits (1 byte)

fid1 = fopen('test1.dat', 'w+');
fwrite(fid1, 'ABCDEFGHIJKLMNOPQRSTUVWXYZ');

fid2 = fopen('test2.dat', 'w+');
fwrite(fid2, 'Second File');

% Seek to the 10th byte ('J'), read 5
fseek(fid1, 9, 'bof');
A = fread(fid1, 5, 'uint8=>char');
fclose(fid1);

% Append to test2.dat
fseek(fid2, 0, 'eof');
fwrite(fid2, A);
fclose(fid2);
```

Alternatives

To move to the beginning of a file, call

`frewind(`*`fileID`*`)`

This call is identical to

`fseek(`*`fileID`*`, 0, 'bof')`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- When the MATLAB behavior differs from the C compiler behavior, the generated code matches the C compiler behavior. Examples include:
  - Seeking past the end of a file.
  - Seeking away from the end of a file opened with append access.
- The offset is passed to the C run-time environment as a signed long data type. Therefore, the offset value must fit in the long data type on the target hardware.

See Also

`fclose` | `feof` | `ferror` | `fopen` | `frewind` | `fread` | `fwrite` | `ftell` | `fscanf` | `fprintf`

Topics

"Reading Portions of a File"

Introduced before R2006a

fsurf

Plot 3-D surface

Syntax

```
fsurf(f)
fsurf(f,xyinterval)

fsurf(funx,funy,funz)
fsurf(funx,funy,funz,uvinterval)

fsurf(___,LineSpec)
fsurf(___,Name,Value)
fsurf(ax,___)
fs = fsurf(___)
```

Description

`fsurf(f)` creates a surface plot of the function `z = f(x,y)` over the default interval `[-5 5]` for `x` and `y`.

`fsurf(f,xyinterval)` plots over the specified interval. To use the same interval for both `x` and `y`, specify `xyinterval` as a two-element vector of the form `[min max]`. To use different intervals, specify a four-element vector of the form `[xmin xmax ymin ymax]`.

`fsurf(funx,funy,funz)` plots the parametric surface defined by `x = funx(u,v)`, `y = funy(u,v)`, `z = funz(u,v)` over the default interval `[-5 5]` for `u` and `v`.

`fsurf(funx,funy,funz,uvinterval)` plots over the specified interval. To use the same interval for both `u` and `v`, specify `uvinterval` as a two-element vector of the form `[min max]`. To use different intervals, specify a four-element vector of the form `[umin umax vmin vmax]`.

`fsurf(___,LineSpec)` sets the line style, marker symbol, and surface color. For example, `'-r'` specifies red lines. Use this option after any of the previous input argument combinations.

`fsurf( ___ ,Name,Value)` specifies surface properties using one or more name-value pair arguments. Use this option after any of the input argument combinations in the previous syntaxes.

`fsurf(ax, ___ )` plots into the axes specified by `ax` instead of the current axes (`gca`).

`fs = fsurf( ___ )` returns a `FunctionSurface` object or `ParameterizedFunctionSurface` object, depending on the inputs. Use `fs` to query and modify properties of a specific surface. For a list of properties, see FunctionSurface Properties or ParameterizedFunctionSurface Properties.

Examples

3-D Surface Plot of Expression

Plot the expression $\sin(x) + \cos(y)$ over the default interval $-5 < x < 5$ and $-5 < y < 5$.

```
fsurf(@(x,y) sin(x)+cos(y))
```

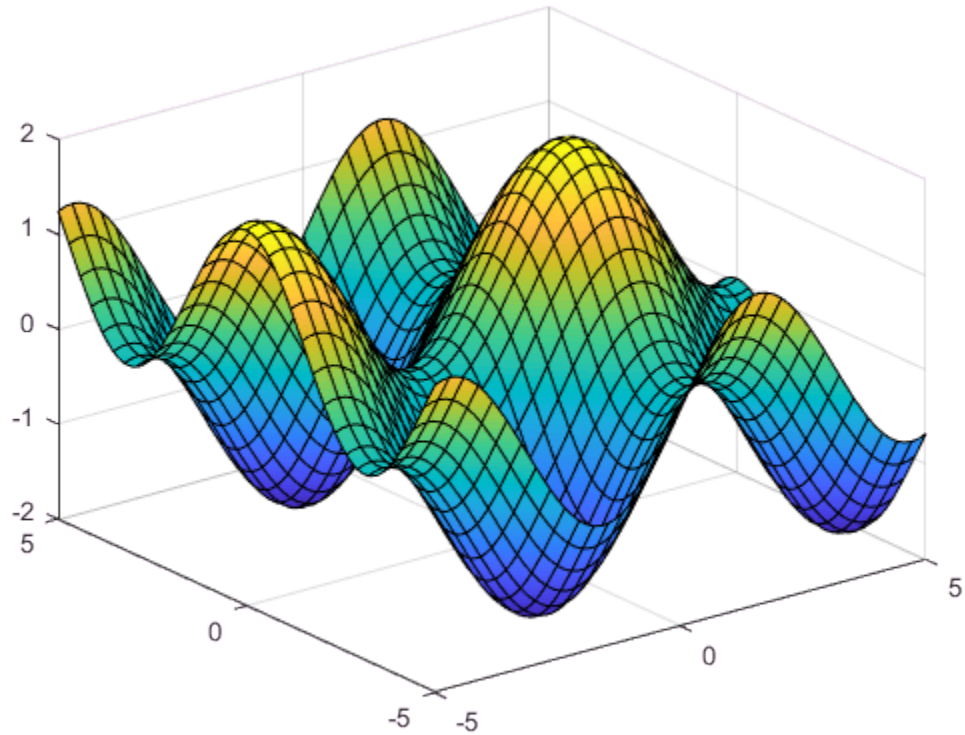

Specify Interval of Surface Plot and Plot Piecewise Expression

Plot the piecewise expression

$$\begin{array}{ll} \mathrm{erf}(x) + \cos(y) & -5 < x < 0 \\ \sin(x) + \cos(y) & 0 < x < 5 \end{array}$$

over $-5 < y < 5$.

Specify the plotting interval as the second input argument of `fsurf`. When you plot multiple surfaces over different intervals in the same axes, the axis limits adjust to include all the data.

```
f1 = @(x,y) erf(x)+cos(y);
fsurf(f1,[-5 0 -5 5])
hold on
f2 = @(x,y) sin(x)+cos(y);
fsurf(f2,[0 5 -5 5])
hold off
```

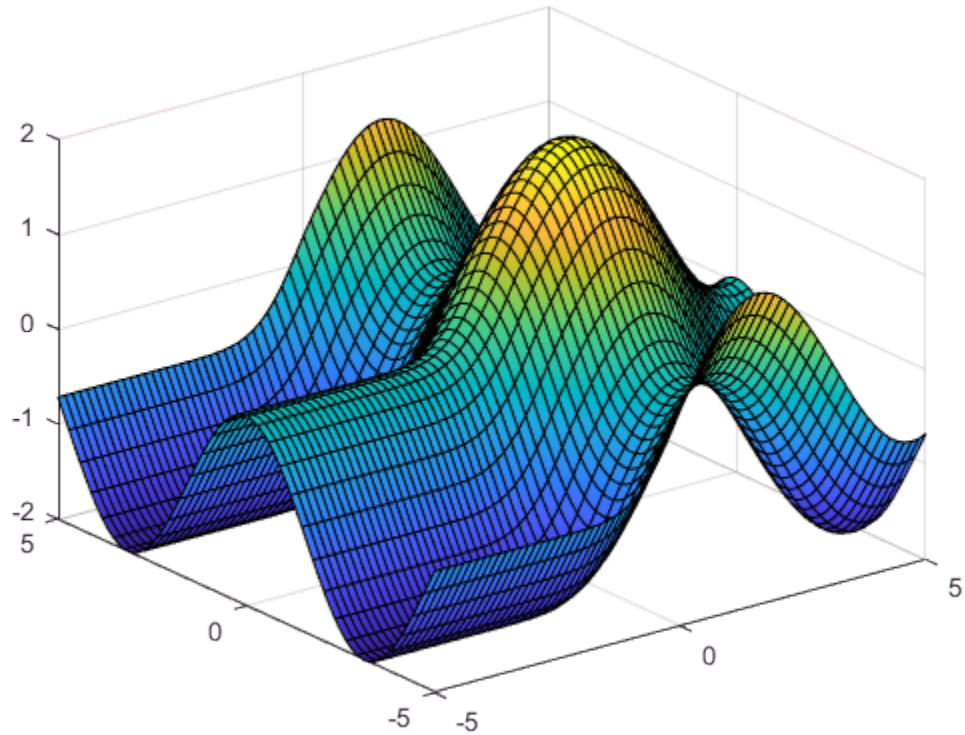

Parameterized Surface Plot

Plot the parameterized surface

$$
\begin{aligned}
x &= r\cos(u)\sin(v) \\
y &= r\sin(u)\sin(v) \\
z &= r\cos(v) \\
\text{where}\quad r &= 2 + \sin(7u + 5v)
\end{aligned}
$$

for $0 < u < 2\pi$ and $0 < v < \pi$. Add light to the surface using `camlight`.

```
r = @(u,v) 2 + sin(7.*u + 5.*v);
funx = @(u,v) r(u,v).*cos(u).*sin(v);
funy = @(u,v) r(u,v).*sin(u).*sin(v);
funz = @(u,v) r(u,v).*cos(v);
fsurf(funx,funy,funz,[0 2*pi 0 pi])
camlight
```

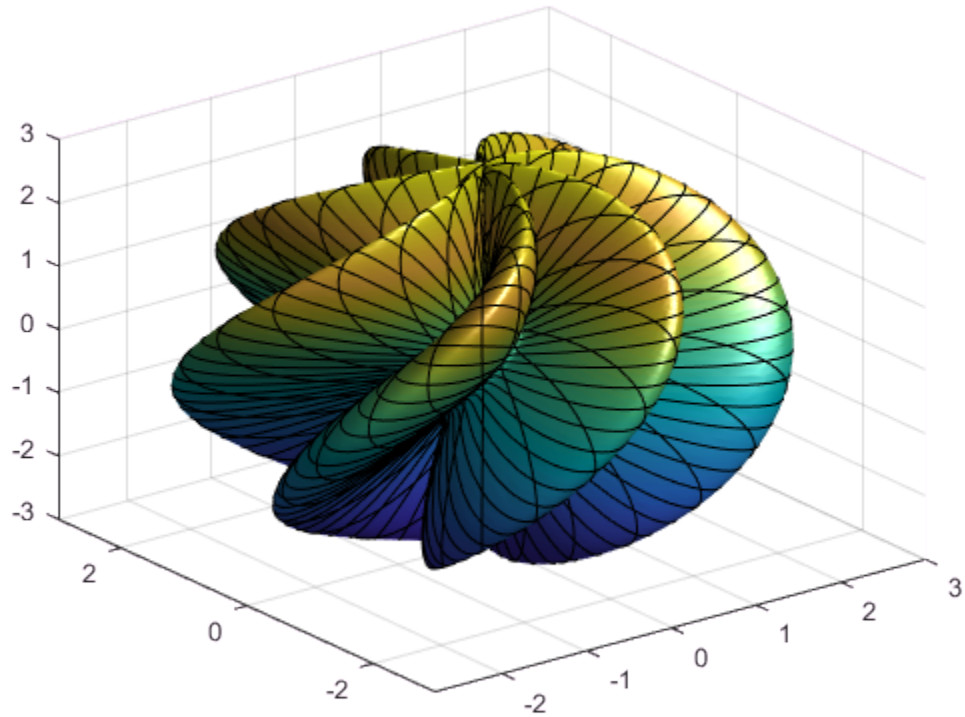

Add Title and Axis Labels and Format Ticks

For x and y from -2π to 2π, plot the 3-D surface $y\sin(x) - x\cos(y)$. Add a title and axis labels and display the axes outline.

```
fsurf(@(x,y) y.*sin(x)-x.*cos(y),[-2*pi 2*pi])
title('ysin(x) - xcos(y) for x and y in [-2\pi,2\pi]')
xlabel('x');
ylabel('y');
zlabel('z');
box on
```

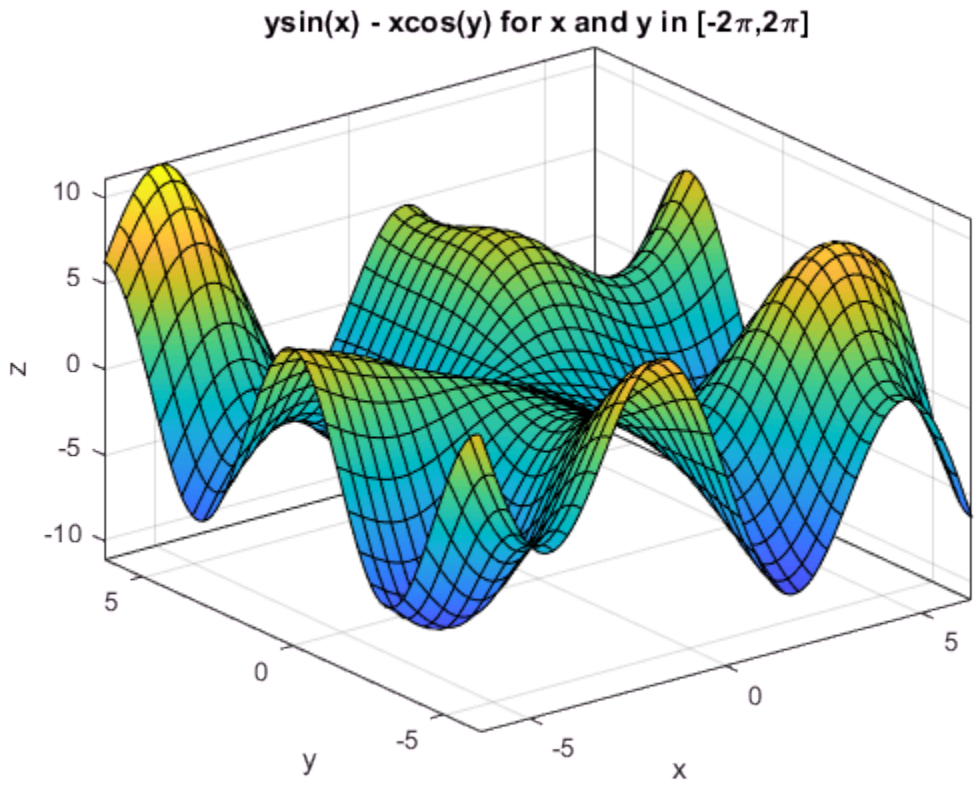

Set the x-axis tick values and associated labels using the `XTickLabel` and `XTick` properties of axes object. Access the axes object using `gca`. Similarly, set the y-axis tick values and associated labels.

```
ax = gca;
ax.XTick = -2*pi:pi/2:2*pi;
ax.XTickLabel = {'-2\pi','-3\pi/2','-\pi','-\pi/2','0','\pi/2','\pi','3\pi/2','2\pi'};

ax.YTick = -2*pi:pi/2:2*pi;
ax.YTickLabel = {'-2\pi','-3\pi/2','-\pi','-\pi/2','0','\pi/2','\pi','3\pi/2','2\pi'};
```

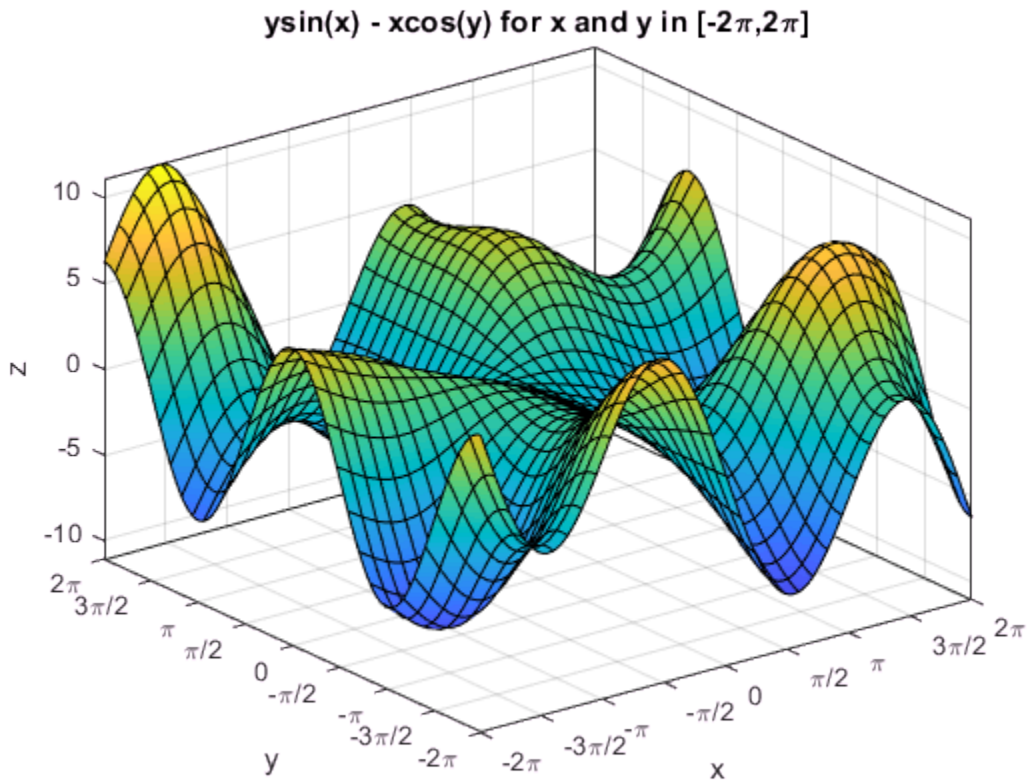

Specify Surface Properties

Plot the parametric surface $x = u\sin(v)$, $y = -u\cos(v)$, $z = v$ with different line styles for different values of v. For $-5 < v < -2$, use a dashed green line for the surface edges. For $-2 < v < 2$, turn off the edges by setting the `EdgeColor` property to `'none'`.

```
funx = @(u,v) u.*sin(v);
funy = @(u,v) -u.*cos(v);
funz = @(u,v) v;

fsurf(funx,funy,funz,[-5 5 -5 -2],'--','EdgeColor','g')
```

```
hold on
fsurf(funx,funy,funz,[-5 5 -2 2],'EdgeColor','none')
hold off
```

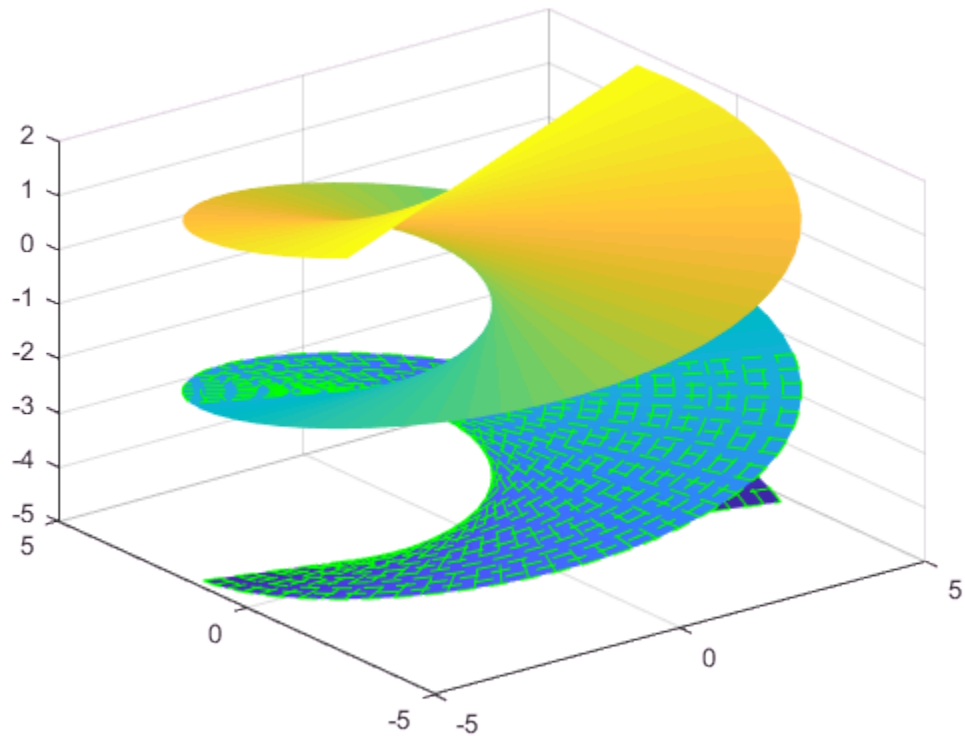

Modify Surface After Creation

Plot the parametric surface

$$x = e^{-|u|/10}\sin(5|v|)$$
$$y = e^{-|u|/10}\cos(5|v|)$$
$$z = u.$$

Assign the parameterized function surface object to a variable.

```
x = @(u,v) exp(-abs(u)/10).*sin(5*abs(v));
y = @(u,v) exp(-abs(u)/10).*cos(5*abs(v));
z = @(u,v) u;
fs = fsurf(x,y,z)
```

```
fs =
  ParameterizedFunctionSurface with properties:

    XFunction: @(u,v)exp(-abs(u)/10).*sin(5*abs(v))
    YFunction: @(u,v)exp(-abs(u)/10).*cos(5*abs(v))
    ZFunction: @(u,v)u
    EdgeColor: [0 0 0]
    LineStyle: '-'
    FaceColor: 'interp'

  Show all properties
```

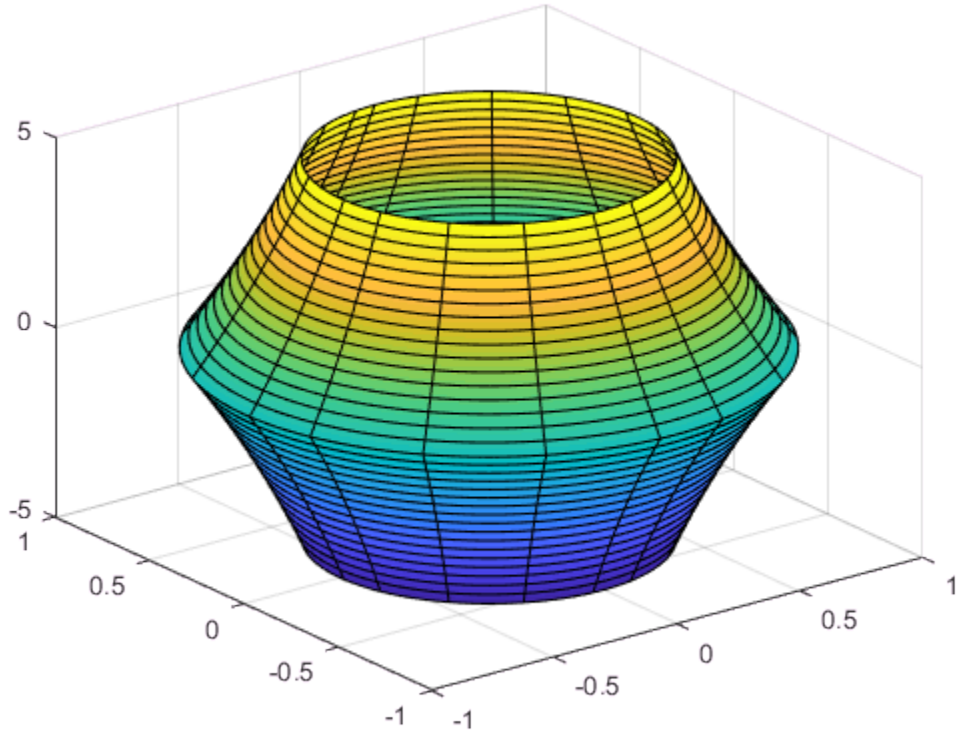

Change the plotting interval for `u` to `[-30 30]` by setting the `URange` property of object. Add transparency to the surface by setting the `FaceAlpha` property to a value between 0 (transparent) and 1 (opaque).

```
fs.URange = [-30 30];
```

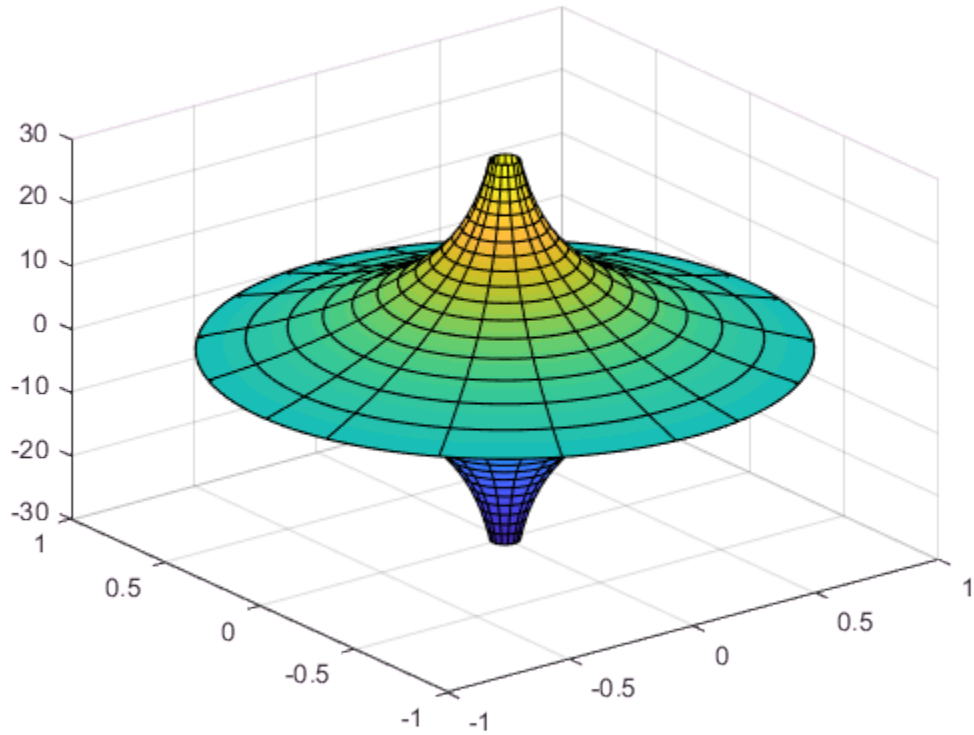


```
fs.FaceAlpha = .5;
```

Show Contours Below Surface Plot

Show contours below a surface plot by setting the `'ShowContours'` option to `'on'`.

```
f = @(x,y) 3*(1-x).^2.*exp(-(x.^2)-(y+1).^2)...
    - 10*(x/5 - x.^3 - y.^5).*exp(-x.^2-y.^2)...
    - 1/3*exp(-(x+1).^2 - y.^2);
fsurf(f,[-3 3],'ShowContours','on')
```

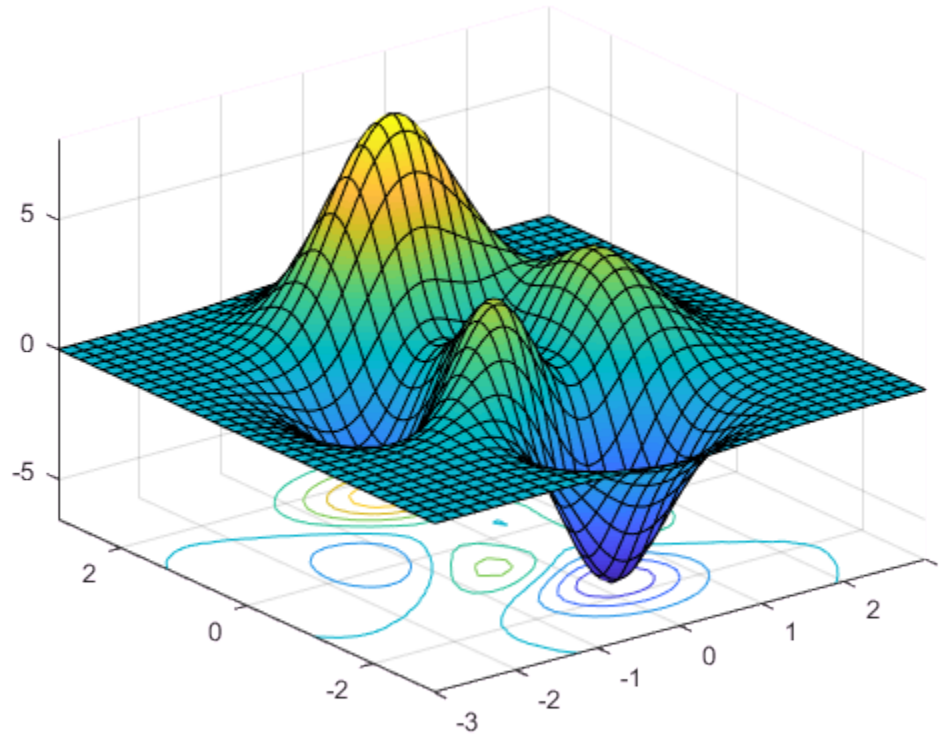

Control Resolution of Surface Plot

Control the resolution of a surface plot using the `'MeshDensity'` option. Increasing `'MeshDensity'` can make smoother, more accurate plots while decreasing it can increase plotting speed.

Divide a figure into two using `subplot`. In the first subplot, plot the parametric surface $x = \sin(s)$, $y = \cos(s)$, $z = (t/10)\sin(1/s)$. The surface has a large gap. Fix this issue by increasing the `'MeshDensity'` to `40` in the second subplot. `fsurf` fills the gap, showing that by increasing `'MeshDensity'` you increased the resolution.

```
subplot(2,1,1)
fsurf(@(s,t) sin(s), @(s,t) cos(s), @(s,t) t/10.*sin(1./s))
```

```
view(-172,25)
title('Default MeshDensity = 35')

subplot(2,1,2)
fsurf(@(s,t) sin(s), @(s,t) cos(s), @(s,t) t/10.*sin(1./s),'MeshDensity',40)
view(-172,25)
title('Increased MeshDensity = 40')
```

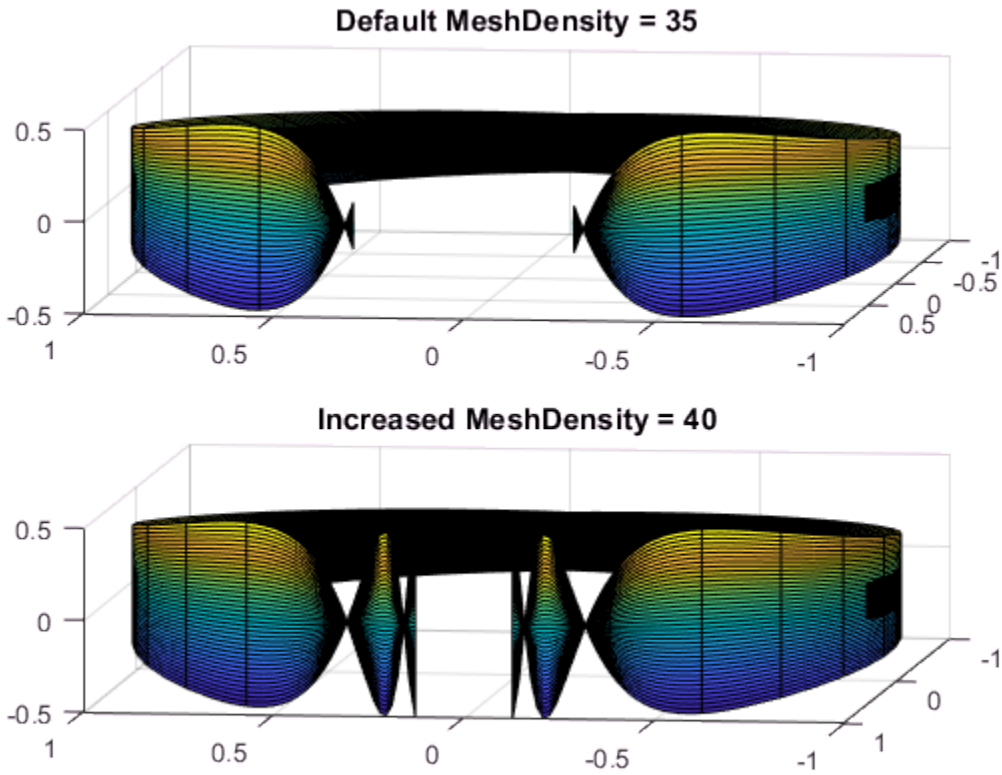

Input Arguments

f — 3-D function to plot
function handle

3-D function to plot, specified as a function handle to a named or anonymous function.

Specify a function of the form `z = f(x,y)`. The function must accept two matrix input arguments and return a matrix output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `f = @(x,y) sin(x) + cos(y);`

`xyinterval` — Plotting interval for `x` and `y`

`[-5 5 -5 5]` (default) | vector of form `[min max]` | vector of form `[xmin xmax ymin ymax]`

Plotting interval for `x` and `y`, specified in one of these forms:

- Vector of form `[min max]` — Use the interval `[min max]` for both `x` and `y`
- Vector of form `[xmin xmax ymin ymax]` — Use the interval `[xmin xmax]` for `x` and `[ymin ymax]` for `y`.

`funx` — Parametric function for *x* coordinates

function handle

Parametric function for *x* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `x = funx(u,v)`. The function must accept two matrix input arguments and return a matrix output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funx = @(u,v) u.*sin(v);`

`funy` — Parametric function for *y* coordinates

function handle

Parametric function for *y* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `y = funy(u,v)`. The function must accept two matrix input arguments and return a matrix output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funy = @(t) @(u,v) -u.*cos(v);`

`funz` — Parametric function for *z* coordinates

function handle

Parametric function for *z* coordinates, specified as a function handle to a named or anonymous function.

Specify a function of the form `z = funz(u,v)`. The function must accept two matrix input arguments and return a matrix output argument of the same size. Use array operators instead of matrix operators for the best performance. For example, use `.*` (`times`) instead of `*` (`mtimes`).

Example: `funz = @(u,v) v;`

`uvinterval` — Plotting interval for `u` and `v`

`[-5 5 -5 5]` (default) | vector of form `[min max]` | vector of form `[umin umax vmin vmax]`

Plotting interval for `u` and `v`, specified in one of these forms:

- Vector of form `[min max]` — Use the interval `[min max]` for both `u` and `v`
- Vector of form `[umin umax vmin vmax]` — Use the interval `[umin umax]` for `u` and `[vmin vmax]` for `v`.

`ax` — Axes object

axes object

Axes object. If you do not specify an axes object, then `fsurf` uses the current axes.

`LineSpec` — Line specification

character vector

Line specification, specified as a character vector with a line style, marker, and color. The elements of the character vector can appear in any order, and you can omit one or more options. To show only markers with no connecting lines, specify a marker and omit the line style.

Example: `'r--o'` specifies a red color, a dashed line, and circle markers

Line Style Specifier	Description
-	Solid line (default)

Line Style Specifier	Description
`--`	Dashed line
`:`	Dotted line
`-.`	Dash-dot line

Marker Specifier	Description
`o`	Circle
`+`	Plus sign
`*`	Asterisk
`.`	Point
`x`	Cross
`s`	Square
`d`	Diamond
`^`	Upward-pointing triangle
`v`	Downward-pointing triangle
`>`	Right-pointing triangle
`<`	Left-pointing triangle
`p`	Pentagram
`h`	Hexagram

Color Specifier	Description
`y`	yellow
`m`	magenta
`c`	cyan
`r`	red
`g`	green
`b`	blue
`w`	white
`k`	black

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Marker','o','MarkerFaceColor','red'`

The properties list here are only a subset. For a full list, see FunctionSurface Properties orParameterizedFunctionSurface Properties.

`'MeshDensity'` — Number of evaluation points per direction
35 (default) | number

Number of evaluation points per direction, specified as a number. The default is `35`. Because `fsurf` objects use adaptive evaluation, the actual number of evaluation points is greater.

Example: `100`

`'ShowContours'` — Display contour plot under plot
`'off'` (default) | `'on'`

Display contour plot under plot, specified as `'off'` (default) or `'on'`.

`'EdgeColor'` — Line color
`[0 0 0]` (default) | `'interp'` | `'none'` | RGB triplet or character vector

Line color, specified as one of these values:

- `'interp'` — Color the edges based on the `ZData` property values.
- `'none'` — Do not draw the edges.
- RGB triplet or a character vector of a color name — Use the same color for all the edges. The default RGB triplet value of `[0 0 0]` corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

'LineStyle' — Line style
'-' (default) | '--' | ':' | '-.' | 'none'

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
'-'	Solid line	
'--'	Dashed line	
':'	Dotted line	
'-.'	Dash-dotted line	
'none'	No line	No line

'LineWidth' — Line width
0.5 (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: 0.75

'Marker' — Marker symbol
'none' (default) | 'o' | '+' | '*' | '.' | 'x' | ...

Marker symbol, specified as one of the markers listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at the intersection points of mesh lines.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'+'`

Example: `'diamond'`

`'MarkerSize'` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

Output Arguments

`fs` — One or more `FunctionSurface` or `ParameterizedFunctionSurface` objects

scalar | vector

One or more `FunctionSurface` or `ParameterizedFunctionSurface` objects, returned as a scalar or a vector.

- If you use the `fsurf(f)` syntax or a variation of this syntax, then `fsurf` returns `FunctionSurface` objects.
- If you use the `fsurf(funx,funy,funz)` syntax or a variation of this syntax, then `fsurf` returns `ParameterizedFunctionSurface` objects.

You can use these objects to query and modify properties of a specific surface. For a list of properties, see FunctionSurface Properties and ParameterizedFunctionSurface Properties.

See Also

See Also

Functions

`fcontour` | `fmesh` | `fplot` | `fplot3` | `hold` | `title`

Properties

FunctionSurface Properties | ParameterizedFunctionSurface Properties

Introduced in R2016a

ftell

Position in open file

Syntax

position = ftell(*fileID*)

Description

position = ftell(*fileID*) returns the current position in the specified file. *position* is a zero-based integer that indicates the number of bytes from the beginning of the file. If the query is unsuccessful, *position* is -1. *fileID* is an integer file identifier obtained from fopen.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

When the MATLAB behavior differs from the C compiler behavior, the generated code usually matches the C compiler behavior. For example, if you use fseek to seek past the end of a file, the behavior of ftell in the generated code matches the C compiler behavior.

See Also

fclose | feof | ferror | fopen | frewind | fread | fwrite | fseek | fscanf | fprintf

Introduced before R2006a

FTP class

Connect to FTP server

Description

Connect to an FTP server by calling the `ftp` function, which creates an FTP object. Perform file operations using methods on the FTP object, such as `mput` and `mget`. When you finish accessing the server, call the `close` method to close the connection.

Construction

`f = ftp(host,username,password)` connects to the FTP server `host` and creates FTP object `f`. If the host supports anonymous connections, you can use the `host` argument alone. To specify an alternate port, separate it from `host` with a colon (`:`).

Input Arguments

`host`

Character vector enclosed in single quotation marks that specifies the FTP server.

`username`

Character vector enclosed in single quotation marks that specifies your user name for the FTP server.

`password`

Character vector enclosed in single quotation marks that specifies your password for the FTP server. Because FTP is not a secure protocol, others can see your user name and password.

Methods

ascii	Set FTP transfer type to ASCII

binary	Set FTP transfer type to binary
cd	Change or view current folder on FTP server
close	Close connection to FTP server
delete	Remove file on FTP server
dir	View contents of folder on FTP server
mget	Download files from FTP server
mkdir	Create folder on FTP server
mput	Upload file or folder to FTP server
rename	Rename file on FTP server
rmdir	Remove folder on FTP server

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Connect to an FTP server and display the FTP object. Replace `ftp.testsite.com` with the URL for an actual FTP site.

```
ts = ftp('ftp.testsite.com');
disp(ts)
```

Connect to port 34. If you specify a port that the FTP server does not support, then `ftp` returns an error.

```
ts = ftp('ftp.testsite.com:34')
```

Modify the following code to connect to a host that requires a password:

```
ts = ftp('ftp.testsite.com','myname','mypassword')
```

Limitations

The `ftp` function does not support proxy server settings.

Algorithms

The `ftp` function is based on code from the Apache Jakarta Project.

See Also

`urlwrite`

Introduced before R2006a

full

Convert sparse matrix to full matrix

Syntax

```
A = full(S)
```

Description

`A = full(S)` converts a sparse matrix `S` to full storage organization, such that `issparse(A)` returns logical `0` (`false`). If `S` is a full matrix, then `A` is identical to `S`.

Examples

Here is an example of a sparse matrix with a density of about 50%. `sparse(S)` and `full(S)` require about the same number of bytes of storage.

```
S = sparse(double(rand(200,200) < 1/2));
A = full(S);
whos
```

```
  Name        Size              Bytes  Class     Attributes

  A         200x200            320000  double
  S         200x200            320824  double    sparse
```

Tips

If `X` is an `m`-by-`n` matrix with `nz` nonzero elements then `full(X)` requires space to store `m*n` elements. On the other hand, `sparse(X)` requires space to store `nz` elements and `(nz+n+1)` integers.

The density of a matrix (`nnz(X)/numel(X)`) determines whether or not it is more efficient to store the matrix as sparse or full. The exact crossover point depends on the

matrix class as well as the platform. For example, in 32-bit MATLAB, a double sparse matrix with less than about 2/3 density will require less space than the same matrix in full storage. In 64-bit MATLAB, however, double matrices with less than half of their elements nonzero are more efficient to store as sparse matrices.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`issparse` | `sparse`

Introduced before R2006a

fullfile

Build full file name from parts

Syntax

```
f = fullfile(filepart1,...,filepartN)
```

Description

`f = fullfile(filepart1,...,filepartN)` builds a full file specification from the specified folder and file names. `fullfile` inserts platform-dependent file separators where necessary, but does not add a trailing file separator. On Windows platforms, the file separator character is a backslash (\). On other platforms, the file separator might be a different character.

`fullfile` replaces all forward slashes (/) with backslashes (\) on Windows. On UNIX platforms, the backlash (\) character is a valid character in file names and is not replaced.

`fullfile` does not trim leading or trailing separators. `fullfile` collapses inner repeated file separators unless they appear at the beginning of the full file specification. `fullfile` also collapses relative directories indicated by the dot symbol, unless they appear at the end of the full file specification. Relative directories indicated by the double-dot symbol are not collapsed.

Examples

Create a Full File Path on Windows

`fullfile` returns a character vector containing the full path to the file. On Windows® platforms, the file seperator character is a backslash (\).

```
f = fullfile('myfolder','mysubfolder','myfile.m')
```

```
f =
```

```
myfolder\mysubfolder\myfile.m
```

Create a Full File Path on UNIX

`fullfile` returns a character vector containing the full path to the file. On UNIX® platforms, the file seperator character is a forward slash (/).

```
f = fullfile('myfolder','mysubfolder','myfile.m')
```

```
f =
'myfolder\mysubfolder\myfile.m'
```

Create Paths to Multiple Files on Windows

`fullfile` returns a cell array containing paths to the files `myfile1.m` and `myfile2.m`.

```
f = fullfile('c:\','myfiles','matlab',{'myfile1.m';'myfile2.m'})
```

```
f =

  2×1 cell array

    'c:\myfiles\matlab\myfile1.m'
    'c:\myfiles\matlab\myfile2.m'
```

Collapse File Separators and Dot Symbols on Windows

Create paths to folders using file separators and dot symbols.

`fullfile` does not trim leading or trailing file separators. `filesep` returns the platform-specific file separator character.

```
f = fullfile('c:\','myfiles','matlab',filesep)
```

```
f =

c:\myfiles\matlab\
```

`fullfile` collapses repeated file separators unless they appear at the beginning of the full file specification.

```
f = fullfile('c:\folder1', '\\\folder2\\')
```

```
f =

c:\folder1\folder2\
```

`fullfile` collapses relative directories indicated by the dot symbol unless they appear at the end of the full file specification. Relative directories indicated by the double-dot symbol are not collapsed.

```
f = fullfile('c:\folder1', '.\folder2', '..\folder3\.')
```

```
f =

c:\folder1\folder2\..\folder3\.
```

Input Arguments

`filepart1,...,filepartN` — Folder or file names

character vectors | cell arrays of character vectors

Folder or file names, specified as character vectors or cell arrays of character vectors. Any nonscalar cell arrays must be of the same size.

Example: `'folder1'`

Example: `'myfile.m, myfile2.m'`

Example: `{'folder1';'folder2'}`

Data Types: `char` | `cell`

Output Arguments

`f` — full file specification

character vector | cell array of character vectors

Full file specification, returned as a character vector or a cell array of character vectors.

Data Types: `char` | `cell`

Tips

- To split a full file name into parts, use the `strsplit` function.

See Also

See Also

`fileparts` | `filesep` | `genpath` | `path` | `pathsep`

Introduced before R2006a

func2str

Construct character vector from function handle

Syntax

```
c = func2str(fh)
```

Description

`c = func2str(fh)` constructs a character vector, `c`, that contains the name of the function associated with the function handle, `fh`. If `fh` is associated with an anonymous function, `func2str` returns a character vector that represents the anonymous function.

Examples

Convert Function Handle to Character Vector

Create function handles for both the `cos` function and for an anonymous function, and then convert them to character vectors.

```
fh = @cos;
c = func2str(fh)
```

```
c =
'cos'
```

```
fh = @(x,y)sqrt(x.^2+y.^2);
c = func2str(fh);
```

```
disp(['Anonymous function: ' c])
```

```
Anonymous function: @(x,y)sqrt(x.^2+y.^2)
```

Programmatically Display Function Handle Name as Character Vector

Create a function that evaluates a function handle for a single input.

Create the following function in a file, `evaluateHandle.m`, in your working folder.

```
function evaluateHandle(fh,x)

y = fh(x);
str = func2str(fh);

disp('For input value: ')
disp(x)
disp(['The function ' str ' evaluates to:'])
disp(y)

end
```

Use a function handle to evaluate the `sin` function at `pi/2`.

```
fh = @sin;
x = pi/2;
evaluateHandle(fh,x)
```

```
For input value:
    1.5708

The function sin evaluates to:
     1
```

Use a function handle to evaluate $x^2 + 7$ for the specified matrix, `A`.

```
fh = @(x) x.^2+7;
A = [1 2;0 1];
evaluateHandle(fh,A)
```

```
For input value:
     1     2
     0     1

The function @(x)x.^2+7 evaluates to:
     8    11
     7     8
```

Input Arguments

`fh` — Handle to convert to character vector
function handle

Handle to convert to a character vector, specified as a function handle.

Tips

- You lose variables stored in the function handle when you convert it to a character vector using `func2str`, and then back to a handle using `str2func`.

See Also

See Also
`functions` | `str2func`

Topics
"Create Function Handle"

Introduced before R2006a

function

Declare function name, inputs, and outputs

Syntax

```
function [y1,...,yN] = myfun(x1,...,xM)
```

Description

`function [y1,...,yN] = myfun(x1,...,xM)` declares a function named `myfun` that accepts inputs `x1,...,xM` and returns outputs `y1,...,yN`. This declaration statement must be the first executable line of the function. Valid function names begin with an alphabetic character, and can contain letters, numbers, or underscores.

You can save your function:

- In a function file which contains only function definitions. The name of the file should match the name of the first function in the file.
- In a script file which contains commands and function definitions. Functions must be at the end of the file. Script files cannot have the same name as a function in the file. Functions are supported in scripts in R2016b or later.

Files can include multiple local functions or nested functions. For readability, use the `end` keyword to indicate the end of each function in a file. The `end` keyword is required when:

- Any function in the file contains a nested function.
- The function is a local function within a function file, and any local function in the file uses the `end` keyword.
- The function is a local function within a script file.

Examples

Function with One Output

Define a function in a file named `average.m` that accepts an input vector, calculates the average of the values, and returns a single result.

```
function y = average(x)
if ~isvector(x)
    error('Input must be a vector')
end
y = sum(x)/length(x);
end
```

Call the function from the command line.

```
z = 1:99;
average(z)
```

```
ans =
    50
```

Function in a Script File

Define a script in a file named `integrationScript.m` that computes the value of the integrand at $2\pi/3$ and computes the area under the curve from 0 to π. Include a local function that defines the integrand, $y = \sin(x)^3$.

Note: Including functions in scripts requires MATLAB® R2016b or later.

```
% Compute the value of the integrand at 2*pi/3.
x = 2*pi/3;
y = myIntegrand(x)

% Compute the area under the curve from 0 to pi.
xmin = 0;
xmax = pi;
f = @myIntegrand;
a = integral(f,xmin,xmax)

function y = myIntegrand(x)
y = sin(x).^3;
end
```

```
y =

    0.6495


a =

    1.3333
```

Function with Multiple Outputs

Define a function in a file named `stat.m` that returns the mean and standard deviation of an input vector.

```
function [m,s] = stat(x)
n = length(x);
m = sum(x)/n;
s = sqrt(sum((x-m).^2/n));
end
```

Call the function from the command line.

```
values = [12.7, 45.4, 98.9, 26.6, 53.1];
[ave,stdev] = stat(values)
```

```
ave =
   47.3400
stdev =
   29.4124
```

Multiple Functions in a Function File

Define two functions in a file named `stat2.m`, where the first function calls the second.

```
function [m,s] = stat2(x)
n = length(x);
m = avg(x,n);
s = sqrt(sum((x-m).^2/n));
end

function m = avg(x,n)
m = sum(x)/n;
end
```

Function `avg` is a *local function*. Local functions are only available to other functions within the same file.

Call function `stat2` from the command line.

```
values = [12.7, 45.4, 98.9, 26.6, 53.1];
[ave,stdev] = stat2(values)
```

```
ave =
   47.3400
stdev =
   29.4124
```

- "Create Functions in Files"
- "Add Functions to Scripts"

See Also

See Also

`nargin` | `nargout` | `pcode` | `return` | `varargin` | `varargout` | `what` | `which`

Topics

"Create Functions in Files"
"Add Functions to Scripts"
"Local Functions"
"Nested Functions"
"Base and Function Workspaces"
"Function Precedence Order"

Introduced before R2006a

functions

Information about function handle

Syntax

```
s = functions(fh)
```

Description

`s = functions(fh)` returns information about a function handle. This information includes the function name, type, and file name.

Use the `functions` function for querying and debugging purposes only.

Note: Do not use `functions` programmatically because its behavior could change in subsequent MATLAB releases.

Examples

Display Information About Named Function Handle

Create a function handle and display its information.

```
fh = @cos;
s = functions(fh)
```

```
s = struct with fields:
    function: 'cos'
        type: 'simple'
        file: ''
```

Display Information About Anonymous Function Handle

Create a function handle to an anonymous function. Display its information and values of required variables.

Create a handle to the function $x^2 + y$, and invoke the function using the handle.

```
y = 7;
fh = @(x)x.^2+y;
z = fh(2)
```

```
z =

    11
```

Display information about the function handle.

```
s = functions(fh)
```

```
s =

            function: '@(x)x.^2+y'
                type: 'anonymous'
                file: ''
           workspace: {[1x1 struct]}
    within_file_path: '__base_function'
```

The function handle contains the required value of `y`.

```
s.workspace{1}
```

```
ans =

    y: 7
```

Display Information About Nested and Local Function Handle

Create a function that returns handles to local and nested functions. Display their information.

Create the following function in a file, `functionsExample.m`, in your working folder. The function returns handles to a nested and local function.

```
function [hNest,hLocal] = functionsExample(v)

hNest = @nestFunction;
hLocal = @localFunction;

    function y = nestFunction(x)
        y = x + v;
    end
```

```
end

function y = localFunction(z)
y = z + 1;
end
```

Invoke the function.

```
[hNest,hLocal] = functionsExample(13)
```

```
hNest =

    @functionsExample/nestFunction


hLocal =

    @localFunction
```

Display information about the handle to the nested function.

```
s1 = functions(hNest)
```

```
s1 =

     function: 'functionsExample/nestFunction'
         type: 'nested'
         file: 'C:\work\functionsExample.m'
    workspace: {[1x1 struct]}
```

Display information about the handle to the local function.

```
s2 = functions(hLocal)
```

```
s2 =

     function: 'localFunction'
         type: 'scopedfunction'
         file: 'C:\work\functionsExample.m'
    parentage: {'localFunction'  'functionsExample'}
```

Input Arguments

`fh` — Handle to query

function handle

Handle to query, specified as a function handle.

Output Arguments

s — Information about function handle

structure

Information about a function handle, returned as a structure. The structure contains the following fields.

Field Name	Field Description
`function`	Function name. If the function associated with the handle is a nested function, the function name takes the form *`main_function/nested_function`*.
`type`	Function type. For example `'simple'`, `'nested'`, `'scopedfunction'`, or `'anonymous'`.
`file`	Full path to the function with the file extension. • If the function is a local or nested function, then `file` is the full path to the main function. • If the function is built-in MATLAB function or an anonymous function, then `file` is an empty character array (`''`). • If you load a saved function handle, then `file` is an empty character array (`''`).

The structure has additional fields depending on the type of function associated with the handle. For example, a local function has a `parentage` field, and an anonymous function has a `workspace` field. Use the information in `s` for querying and debugging purposes only.

See Also

See Also

`func2str` | `str2func`

Topics

"Create Function Handle"
"Compare Function Handles"

Introduced before R2006a

functiontests

Create array of tests from handles to local functions

Syntax

```
tests = functiontests(f)
```

Description

`tests = functiontests(f)` creates an array of tests, `tests`, from a cell array of handles to local functions, `f`. To apply defined setup and teardown functions, include their function handles in `f`.

Local test functions must include 'test' at the beginning or end of the function name. `functiontests` must be called from within a test file.

Examples

Create Test Array

Create the file `exampleTest.m` in your MATLAB® path. In the main function, create a test array. Use local functions to define setup, teardown, and two function tests. Your file should look like this.

```
function tests = exampleTest
tests = functiontests(localfunctions);

function setup(testCase)
function teardown(testCase)
function exampleOneTest(testCase)
function testExampleTwo(testCase)
```

From the command line, call the `exampleTest` function.

```
tests = exampleTest
```

```
tests =

  1×2 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

Access the test suite to verify the names of the two function tests.

```
tests.Name
```

```
ans =

    'exampleTest/exampleOneTest'


ans =

    'exampleTest/testExampleTwo'
```

- "Write Function-Based Unit Tests"
- "Write Simple Test Case Using Functions"
- "Write Test Using Setup and Teardown Functions"

Input Arguments

`f` — Handles to local test functions

cell array of function handles

Handles to local test functions, specified as a cell array. Use `f=localfunctions` in your working file to automatically generate a cell array of function handles for that file. If

you want explicit test enumeration, construct `f` by listing individual functions. `f` must include any setup or teardown functions necessary for your test.

Example: `f = localfunctions;`

Example: `f = {@setup,@exampleOneTest,@teardown};`

See Also

See Also

matlab.unittest.Test | `localfunctions` | `runtests`

Topics

"Write Function-Based Unit Tests"
"Write Simple Test Case Using Functions"
"Write Test Using Setup and Teardown Functions"

Introduced in R2013b

funm

Evaluate general matrix function

Syntax

```
F = funm(A,fun)
F = funm(A,fun,options)
F = funm(A,fun,options,p1,p2,...)
[F,exitflag] = funm(...)
[F,exitflag,output] = funm(...)
```

Description

`F = funm(A,fun)` evaluates the user-defined function `fun` at the square matrix argument `A`. `F = fun(x,k)` must accept a vector `x` and an integer `k`, and return a vector `f` of the same size of `x`, where `f(i)` is the `k`th derivative of the function `fun` evaluated at `x(i)`. The function represented by fun must have a Taylor series with an infinite radius of convergence, except for `fun = @log`, which is treated as a special case.

You can also use `funm` to evaluate the special functions listed in the following table at the matrix `A`.

Function	Syntax for Evaluating Function at Matrix A
`exp`	`funm(A, @exp)`
`log`	`funm(A, @log)`
`sin`	`funm(A, @sin)`
`cos`	`funm(A, @cos)`
`sinh`	`funm(A, @sinh)`
`cosh`	`funm(A, @cosh)`

For matrix square roots, use `sqrtm(A)` instead. For matrix exponentials, which of `expm(A)` or `funm(A, @exp)` is the more accurate depends on the matrix `A`.

The function represented by `fun` must have a Taylor series with an infinite radius of convergence. The exception is `@log`, which is treated as a special case. “Parameterizing

Functions" explains how to provide additional parameters to the function `fun`, if necessary.

`F = funm(A,fun,options)` sets the algorithm's parameters to the values in the structure `options`.

The following table lists the fields of `options`.

Field	Description	Values
`options.Display`	Level of display	`'off'` (default), `'on'`, `'verbose'`
`options.TolBlk`	Tolerance for blocking Schur form	Positive scalar. The default is `0.1`.
`options.TolTay`	Termination tolerance for evaluating the Taylor series of diagonal blocks	Positive scalar. The default is `eps`.
`options.MaxTerms`	Maximum number of Taylor series terms	Positive integer. The default is `250`.
`options.MaxSqrt`	When computing a logarithm, maximum number of square roots computed in inverse scaling and squaring method.	Positive integer. The default is `100`.
`options.Ord`	Specifies the ordering of the Schur form `T`.	A vector of length `length(A)`. `options.Ord(i)` is the index of the block into which `T(i,i)` is placed. The default is `[]`.

`F = funm(A,fun,options,p1,p2,...)` passes extra inputs `p1,p2,...` to the function.

`[F,exitflag] = funm(...)` returns a scalar `exitflag` that describes the exit condition of `funm`. `exitflag` can have the following values:

- `0` — The algorithm was successful.
- `1` — One or more Taylor series evaluations did not converge, or, in the case of a logarithm, too many square roots are needed. However, the computed value of `F` might still be accurate.

`[F,exitflag,output] = funm(...)` returns a structure `output` with the following fields:

Field	Description
`output.terms`	Vector for which `output.terms(i)` is the number of Taylor series terms used when evaluating the *i*th block, or, in the case of the logarithm, the number of square roots of matrices of dimension greater than 2.
`output.ind`	Cell array for which the `(i,j)` block of the reordered Schur factor `T` is `T(output.ind{i}, output.ind{j})`.
`output.ord`	Ordering of the Schur form, as passed to `ordschur`
`output.T`	Reordered Schur form

If the Schur form is diagonal then `output = struct('terms',ones(n,1),'ind',{1:n})`.

Examples

Example 1

The following command computes the matrix sine of the 3-by-3 magic matrix.

```
F=funm(magic(3), @sin)

F =

   -0.3850    1.0191    0.0162
    0.6179    0.2168   -0.1844
    0.4173   -0.5856    0.8185
```

Example 2

The statements

```
S = funm(X,@sin);
C = funm(X,@cos);
```

produce the same results to within roundoff error as

```
E = expm(i*X);
C = real(E);
S = imag(E);
```

In either case, the results satisfy `S*S+C*C = I`, where `I = eye(size(X))`.

Example 3

To compute the function `exp(x) + cos(x)` at `A` with one call to `funm`, use

```
F = funm(A,@fun_expcos)
```

where `fun_expcos` is the following function.

```
function f = fun_expcos(x, k)
% Return kth derivative of exp + cos at X.
        g = mod(ceil(k/2),2);
        if mod(k,2)
           f = exp(x) + sin(x)*(-1)^g;
        else
           f = exp(x) + cos(x)*(-1)^g;
        end
```

Algorithms

The algorithm `funm` uses is described in [1].

References

[1] Davies, P. I. and N. J. Higham, "A Schur-Parlett algorithm for computing matrix functions," *SIAM J. Matrix Anal. Appl.*, Vol. 25, Number 2, pp. 464-485, 2003.

[2] Golub, G. H. and C. F. Van Loan, *Matrix Computation*, Third Edition, Johns Hopkins University Press, 1996, p. 384.

[3] Moler, C. B. and C. F. Van Loan, "Nineteen Dubious Ways to Compute the Exponential of a Matrix, Twenty-Five Years Later" *SIAM Review 20*, Vol. 45, Number 1, pp. 1-47, 2003.

See Also

See Also

`expm` | `logm` | `sqrtm`

Topics

"Create Function Handle"

Introduced before R2006a

fwrite

Write data to binary file

Syntax

```
fwrite(fileID,A)
fwrite(fileID,A,precision)
fwrite(fileID,A,precision,skip)
fwrite(fileID,A,precision,skip,machinefmt)

count = fwrite( ___ )
```

Description

`fwrite(fileID,A)` write the elements of array `A` as 8-bit unsigned integers to a binary file in column order. The binary file is indicated by the file identifier, `fileID`. Use `fopen` to open the file and obtain the `fileID` value. When you finish reading, close the file by calling `fclose(fileID)`.

`fwrite(fileID,A,precision)` writes the values in `A` in the form and size described by `precision`.

`fwrite(fileID,A,precision,skip)` skips the number of bytes or bits specified by `skip` before writing each value.

`fwrite(fileID,A,precision,skip,machinefmt)` additionally specifies the order for writing bytes or bits to the file. The `skip` argument is optional.

`count = fwrite( ___ )` returns the number of elements of `A` that `fwrite` successfully writes to the file. You can use this syntax with any of the input arguments of the previous syntaxes.

Examples

Write uint8 Data to Binary File

Open a file named `nine.bin` for writing. Specify write access using `'w'` in the call to `fopen`.

```
fileID = fopen('nine.bin','w');
```

`fopen` returns a file identifier, `fileID`.

Write the integers from 1 to 9 as 8-bit unsigned integers.

```
fwrite(fileID,[1:9]);
```

Close the file.

```
fclose(fileID);
```

Write 4-byte Integers to Binary File

Open a file named `magic5.bin` for writing.

```
fileID = fopen('magic5.bin','w');
```

Write the 25 elements of the 5-by-5 magic square. Use the `precision` argument, `'integer*4'`, to write 4-byte integers.

```
fwrite(fileID,magic(5),'integer*4');
```

Close the file.

```
fclose(fileID);
```

Append Data to Binary File

Write a binary file containing the elements of the 4-by-4 magic square, stored as double-precision floating-point numbers.

```
fileID = fopen('magic4.bin','w');
fwrite(fileID,magic(4),'double');
fclose(fileID);
```

Open the file, `magic4.bin`, with write-access that enables appending to the file. Specify the file-access type, `'a'`, in the call to `fopen`.

```
fileID = fopen('magic4.bin','a');
```

Append a 4-by-4 matrix of zeros to the file. Then, close the file.

```
fwrite(fileID,zeros(4),'double');
fclose(fileID);
```

Write Binary File with Big-Endian Byte Ordering

Write random double-precision numbers to a file named `myfile.bin` for use on a big-endian system. Specify a `machinefmt` value of `'ieee-be'` in the call to `fwrite`, to indicate big-endian byte ordering.

```
fileID = fopen('myfile.bin','w');
fwrite(fileID,rand(4),'double','ieee-be');
fclose(fileID);
```

- "Write and Read Complex Numbers"

Input Arguments

`fileID` — File identifier

integer | 1 | 2

File identifier, specified as an integer obtained from `fopen`, `1` for standard output (the screen), or `2` for standard error.

A — Data to write

numeric array | character array | string array

Data to write, specified as a numeric, character, or string array.

Example: `[1,2,3;4,5,6]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string`
Complex Number Support: Yes

`precision` — Class and size of values to write

`'uint8'` (default) | character vector | string scalar

Class and size in bits of the values to write, specified as one of the character vectors or string scalars listed in the Precision column.

Value Type	Precision	Bits (Bytes)
Integers, unsigned	'uint'	32 (4)
	'uint8'	8 (1)
	'uint16'	16 (2)
	'uint32'	32 (4)
	'uint64'	64 (8)
	'uchar'	8 (1)
	'unsigned char'	8 (1)
	'ushort'	16 (2)
	'ulong'	32 (4)
	'ubit*n*'	$1 \le n \le 64$
Integers, signed	'int'	32 (4)
	'int8'	8 (1)
	'int16'	16 (2)
	'int32'	32 (4)
	'int64'	64 (8)
	'integer*1'	8 (1)
	'integer*2'	16 (2)
	'integer*4'	32 (4)
	'integer*8'	64 (8)
	'schar'	8 (1)
	'signed char'	8 (1)
	'short'	16 (2)
	'long'	32 (4)
	'bit*n*'	$1 \le n \le 64$
Floating-point numbers	'single'	32 (4)
	'double'	64 (8)

Value Type	Precision	Bits (Bytes)
	'float'	32 (4)
	'float32'	32 (4)
	'float64'	64 (8)
	'real*4'	32 (4)
	'real*8'	64 (8)
Characters	'char*1'	8 (1)
	'char'	Depends on the encoding scheme associated with the file. Set encoding with fopen.

If you specify a precision of bit*n* or ubit*n*, then fwrite saturates for all values outside the range.

Note: To preserve NaN and Inf values in MATLAB, read and write data of class double or single.

skip — Number of bytes to skip

0 (default) | scalar

Number of bytes to skip before writing each value, specified as a scalar. If you specify a precision of bit*n* or ubit*n*, specify skip in bits.

Use the skip argument to insert data into noncontiguous fields in fixed-length records.

machinefmt — Order for writing bytes

'n' (default) | 'b' | 'l' | 's' | 'a'

Order for writing bytes within the file, specified as one of the character vectors or string scalars in the table that follows. For bit*n* and ubit*n* precisions, machinefmt specifies the order for writing bits within a byte, but the order for writing bytes remains your system byte ordering.

'n' or 'native'	Your system byte ordering (default)
'b' or 'ieee-be'	Big-endian ordering

`'l'` or `'ieee-le'`	Little-endian ordering
`'s'` or `'ieee-be.l64'`	Big-endian ordering, 64-bit long data type
`'a'` or `'ieee-le.l64'`	Little-endian ordering, 64-bit long data type

By default, all currently supported platforms use little-endian ordering for new files. Existing binary files can use either big-endian or little-endian ordering.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The precision argument must be a constant.
- Does not support precision types `'long'`, `'ulong'`, `'unsigned long'`, `'bit*n*'`, and `'ubit*n*'`.
- Does not support the machine format (order for writing bytes) input argument.
- If the precision is a C type such as `int`, the target and production sizes for that type must:
  - Match.
  - Map directly to a MATLAB integer type.
- Treats a `char` type as a signed 8-bit integer. Use values from 0 through 127 only.
- When appending to a file and using a skip argument, it must be possible for the C run-time `fseek` to seek beyond the end of the file and initialize unwritten bytes to 0. This behavior matches the behavior of POSIX and Windows.

See Also

See Also

`fclose` | `ferror` | `fopen` | `fprintf` | `fread` | `fscanf` | `fseek` | `ftell`

Topics

"Write and Read Complex Numbers"
"Overwrite or Append to an Existing Binary File"
"Create a File for Use on a Different System"

Introduced before R2006a

fwrite (serial)

Write binary data to device

Syntax

```
fwrite(obj,A)
fwrite(obj,A,'precision')
fwrite(obj,A,'mode')
fwrite(obj,A,'precision','mode')
```

Description

`fwrite(obj,A)` writes the binary data `A` to the device connected to the serial port object, `obj`.

`fwrite(obj,A,'precision')` writes binary data with precision specified by *`precision`*.

`precision` controls the number of bits written for each value and the interpretation of those bits as integer, floating-point, or character values. If *`precision`* is not specified, `uchar` (an 8-bit unsigned character) is used. The supported values for *`precision`* are listed in Tips.

`fwrite(obj,A,'mode')` writes binary data with command-line access specified by *`mode`*. If *`mode`* is `sync`, `A` is written synchronously and the command line is blocked. If *`mode`* is `async`, `A` is written asynchronously and the command line is not blocked. If *`mode`* is not specified, the write operation is synchronous.

`fwrite(obj,A,'precision','mode')` writes binary data with precision specified by *`precision`* and command-line access specified by *`mode`*.

Tips

Before you can write data to the device, it must be connected to `obj` with the `fopen` function. A connected serial port object has a `Status` property value of `open`. An error is returned if you attempt to perform a write operation while `obj` is not connected to the device.

The `ValuesSent` property value is increased by the number of values written each time `fwrite` is issued.

An error occurs if the output buffer cannot hold all the data to be written. You can specify the size of the output buffer with the `OutputBufferSize` property.

If you set the `FlowControl` property to `hardware` on a serial object, and a hardware connection is not detected, `fwrite` returns an error message. This occurs if a device is not connected, or a connected device is not asserting that is ready to receive data. Check the remote device status and flow control settings to see if hardware flow control is causing errors in MATLAB.

Note: If you want to check to see if the device is asserting that it is ready to receive data, set the `FlowControl` to `none`. Once you connect to the device, check the `PinStatus` structure for `ClearToSend`. If `ClearToSend` is `off`, there is a problem on the remote device side. If `ClearToSend` is `on`, there is a hardware `FlowControl` device prepared to receive data and you can execute `fwrite`.

Synchronous Versus Asynchronous Write Operations

By default, data is written to the device synchronously and the command line is blocked until the operation completes. You can perform an asynchronous write by configuring the *`mode`* input argument to be `async`. For asynchronous writes:

- The `BytesToOutput` property value is continuously updated to reflect the number of bytes in the output buffer.
- The callback function specified for the `OutputEmptyFcn` property is executed when the output buffer is empty.

You can determine whether an asynchronous write operation is in progress with the `TransferStatus` property.

Synchronous and asynchronous write operations are discussed in more detail in Writing Data.

Rules for Completing a Write Operation with fwrite

A binary write operation using `fwrite` completes when:

- The specified data is written.
- The time specified by the `Timeout` property passes.

Note The `Terminator` property is not used with binary write operations.

Supported Precisions

The following table shows the supported values for *`precision`*.

Data Type	Precision	Interpretation
Character	`uchar`	8-bit unsigned character
	`schar`	8-bit signed character
	`char`	8-bit signed or unsigned character
Integer	`int8`	8-bit integer
	`int16`	16-bit integer
	`int32`	32-bit integer
	`uint8`	8-bit unsigned integer
	`uint16`	16-bit unsigned integer
	`uint32`	32-bit unsigned integer
	`short`	16-bit integer
	`int`	32-bit integer
	`long`	32- or 64-bit integer
	`ushort`	16-bit unsigned integer
	`uint`	32-bit unsigned integer
	`ulong`	32- or 64-bit unsigned integer
Floating-point	`single`	32-bit floating point
	`float32`	32-bit floating point
	`float`	32-bit floating point
	`double`	64-bit floating point
	`float64`	64-bit floating point

See Also

`fopen` | `fprintf` | `BytesToOutput` | `OutputBufferSize` | `OutputEmptyFcn` | `Status` | `Timeout` | `TransferStatus` | `ValuesSent`

Introduced before R2006a

fzero

Root of nonlinear function

Syntax

```
x = fzero(fun,x0)
x = fzero(fun,x0,options)

x = fzero(problem)

[x,fval,exitflag,output] = fzero( ___ )
```

Description

`x = fzero(fun,x0)` tries to find a point `x` where `fun(x) = 0`. This solution is where `fun(x)` changes sign—`fzero` cannot find a root of a function such as `x^2`.

`x = fzero(fun,x0,options)` uses `options` to modify the solution process.

`x = fzero(problem)` solves a root-finding problem specified by `problem`.

`[x,fval,exitflag,output] = fzero( ___ )` returns `fun(x)` in the `fval` output, `exitflag` encoding the reason `fzero` stopped, and an output structure containing information on the solution process.

Examples

Root Starting From One Point

Calculate π by finding the zero of the sine function near 3.

```
fun = @sin; % function
x0 = 3; % initial point
```

```
x = fzero(fun,x0)
```

```
x = 3.1416
```

Root Starting From an Interval

Find the zero of cosine between 1 and 2.

```
fun = @cos; % function
x0 = [1 2]; % initial interval
x = fzero(fun,x0)
```

```
x = 1.5708
```

Note that $\cos(1)$ and $\cos(2)$ differ in sign.

Root of a Function Defined by a File

Find a zero of the function $f(x) = x^3 - 2x - 5$.

First, write a file called `f.m`.

```
function y = f(x)
y = x.^3 - 2*x - 5;
```

Save `f.m` on your MATLAB path.

Find the zero of $f(x)$ near 2.

```
fun = @f; % function
x0 = 2; % initial point
z = fzero(fun,x0)
```

```
z =
    2.0946
```

Since `f(x)` is a polynomial, you can find the same real zero, and a complex conjugate pair of zeros, using the `roots` command.

```
roots([1 0 -2 -5])
```

```
ans =
2.0946
-1.0473 + 1.1359i
-1.0473 - 1.1359i
```

Root of Function with Extra Parameter

Find the root of a function that has an extra parameter.

```
myfun = @(x,c) cos(c*x);  % parameterized function
c = 2;                    % parameter
fun = @(x) myfun(x,c);    % function of x alone
x = fzero(fun,0.1)
```

```
x = 0.7854
```

Nondefault Options

Plot the solution process by setting some plot functions.

Define the function and initial point.

```
fun = @(x)sin(cosh(x));
x0 = 1;
```

Examine the solution process by setting options that include plot functions.

```
options = optimset('PlotFcns',{@optimplotx,@optimplotfval});
```

Run `fzero` including `options`.

```
x = fzero(fun,x0,options)
```

```
x = 1.8115
```

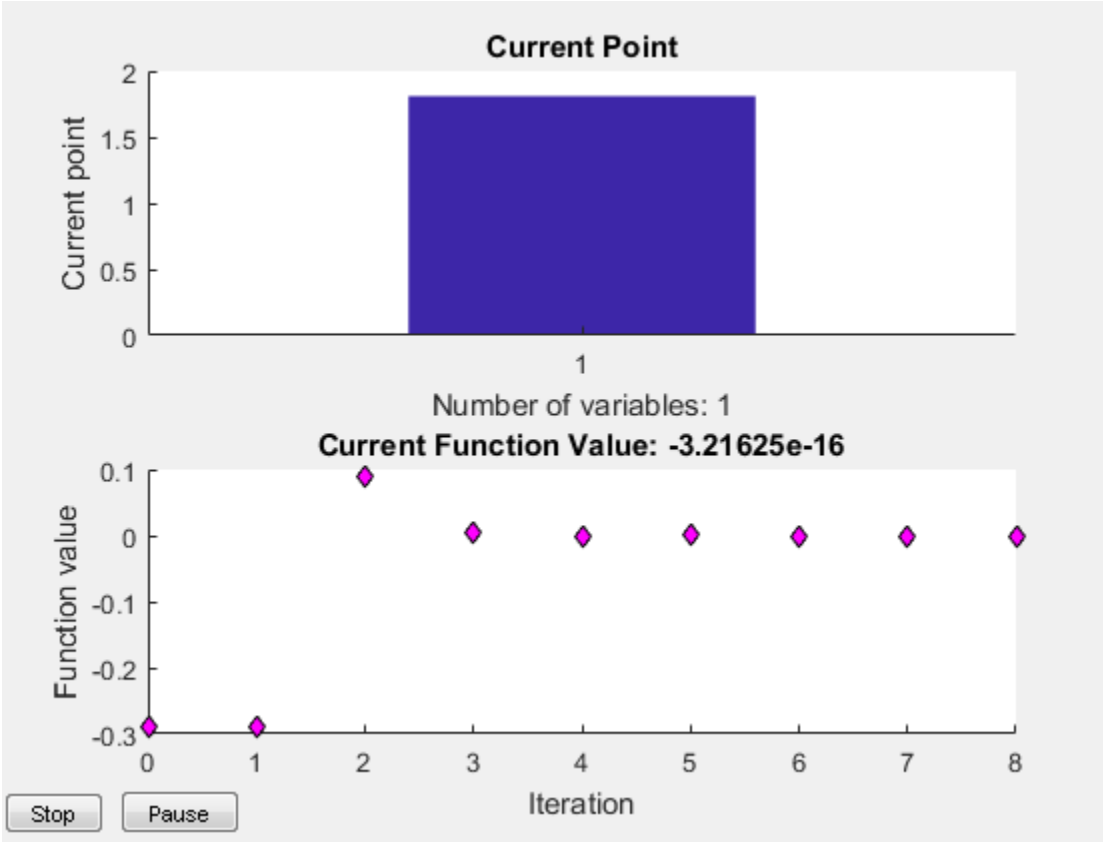

Solve Problem Structure

Solve a problem that is defined by a problem structure.

Define a structure that encodes a root-finding problem.

```
problem.objective = @(x)sin(cosh(x));
problem.x0 = 1;
problem.solver = 'fzero'; % a required part of the structure
problem.options = optimset(@fzero); % default options
```

Solve the problem.

```
x = fzero(problem)
```

```
x = 1.8115
```

More Information from Solution

Find the point where `exp(-exp(-x)) = x`, and display information about the solution process.

```
fun = @(x) exp(-exp(-x)) - x; % function
x0 = [0 1]; % initial interval
options = optimset('Display','iter'); % show iterations
[x fval exitflag output] = fzero(fun,x0,options)
```

```
 Func-count    x          f(x)             Procedure
    2               1     -0.307799        initial
    3        0.544459     0.0153522        interpolation
    4        0.566101    0.00070708        interpolation
    5        0.567143  -1.40255e-08        interpolation
    6        0.567143   1.50013e-12        interpolation
    7        0.567143             0        interpolation

Zero found in the interval [0, 1]

x = 0.5671

fval = 0

exitflag = 1

output = struct with fields:
    intervaliterations: 0
            iterations: 5
             funcCount: 7
             algorithm: 'bisection, interpolation'
               message: 'Zero found in the interval [0, 1]'
```

`fval` = 0 means `fun(x) = 0`, as desired.

- "Roots of Scalar Functions"
- "Parameterizing Functions"

Input Arguments

fun — Function to solve

function handle | function name

Function to solve, specified as a handle to a scalar-valued function or the name of such a function. `fun` accepts a scalar `x` and returns a scalar `fun(x)`.

`fzero` solves `fun(x) = 0`. To solve an equation `fun(x) = c(x)`, instead solve `fun2(x) = fun(x) - c(x) = 0`.

To include extra parameters in your function, see the example "Root of Function with Extra Parameter" on page 1-3670 and the section "Parameterizing Functions".

Example: `'sin'`

Example: `@myFunction`

Example: `@(x)(x-a)^5 - 3*x + a - 1`

Data Types: `char` | `function_handle` | `string`

x0 — Initial value

scalar | 2-element vector

Initial value, specified as a real scalar or a 2-element real vector.

- Scalar — `fzero` begins at `x0` and tries to locate a point `x1` where `fun(x1)` has the opposite sign of `fun(x0)`. Then `fzero` iteratively shrinks the interval where `fun` changes sign to reach a solution.
- 2-element vector — `fzero` checks that `fun(x0(1))` and `fun(x0(2))` have opposite signs, and errors if they do not. It then iteratively shrinks the interval where `fun` changes sign to reach a solution. An interval `x0` must be finite; it cannot contain `±Inf`.

Tip: Calling `fzero` with an interval (`x0` with two elements) is often faster than calling it with a scalar `x0`.

Example: 3

Example: [2,17]

Data Types: `double`

`options` — Options for solution process
structure, typically created using `optimset`

Options for solution process, specified as a structure. Create or modify the `options` structure using `optimset`. `fzero` uses these `options` structure fields.

`Display`	Level of display: • `'off'` displays no output. • `'iter'` displays output at each iteration. • `'final'` displays just the final output. • `'notify'` (default) displays output only if the function does not converge.
`FunValCheck`	Check whether objective function values are valid. • `'on'` displays an error when the objective function returns a value that is `complex`, `Inf`, or `NaN`. • The default, `'off'`, displays no error.
`OutputFcn`	Specify one or more user-defined functions that an optimization function calls at each iteration, either as a function handle or as a cell array of function handles. The default is none (`[]`). See “Output Functions”.
`PlotFcns`	Plot various measures of progress while the algorithm executes. Select from predefined plots or write your own. Pass a function handle or a cell array of function handles. The default is none (`[]`). • `@optimplotx` plots the current point. • `@optimplotfval` plots the function value. For information on writing a custom plot function, see “Plot Functions”.
`TolX`	Termination tolerance on `x`, a positive scalar. The default is `eps`, 2.2204e–16.

Example: `options = optimset('FunValCheck','on')`

Data Types: `struct`

`problem` — Root-finding problem

structure

Root-finding problem, specified as a structure with all of the following fields.

`objective`	Objective function
`x0`	Initial point for `x`, real scalar or 2-element vector
`solver`	`'fzero'`
`options`	Options structure, typically created using `optimset`

For an example, see "Solve Problem Structure" on page 1-3671.

Data Types: `struct`

Output Arguments

`x` — Location of root or sign change

real scalar

Location of root or sign change, returned as a scalar.

`fval` — Function value at `x`

real scalar

Function value at `x`, returned as a scalar.

`exitflag` — Integer encoding the exit condition

integer

Integer encoding the exit condition, meaning the reason `fzero` stopped its iterations.

`1`	Function converged to a solution `x`.
`-1`	Algorithm was terminated by the output function or plot function.
`-3`	`NaN` or `Inf` function value was encountered while searching for an interval containing a sign change.
`-4`	Complex function value was encountered while searching for an interval containing a sign change.
`-5`	Algorithm might have converged to a singular point.

-6	`fzero` did not detect a sign change.

`output` — Information about root-finding process
structure

Information about root-finding process, returned as a structure. The fields of the structure are:

`intervaliterations`	Number of iterations taken to find an interval containing a root
`iterations`	Number of zero-finding iterations
`funcCount`	Number of function evaluations
`algorithm`	`'bisection, interpolation'`
`message`	Exit message

Algorithms

The `fzero` command is a function file. The algorithm, created by T. Dekker, uses a combination of bisection, secant, and inverse quadratic interpolation methods. An Algol 60 version, with some improvements, is given in [1]. A Fortran version, upon which `fzero` is based, is in [2].

References

[1] Brent, R., *Algorithms for Minimization Without Derivatives*, Prentice-Hall, 1973.

[2] Forsythe, G. E., M. A. Malcolm, and C. B. Moler, *Computer Methods for Mathematical Computations*, Prentice-Hall, 1976.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

For C/C++ code generation:

- The `fun` input argument to must be a function handle, and not a structure or character vector.
- `fzero` ignores all options except for `TolX` and `FunValCheck`.
- `fzero` does not support the fourth output argument, the output structure.

See Also

See Also

`fminbnd` | `optimset` | `roots`

Topics

"Roots of Scalar Functions"
"Parameterizing Functions"

Introduced before R2006a

matlab.unittest.FunctionTestCase class

Package: matlab.unittest
Superclasses: matlab.unittest.TestCase

TestCase used for function-based tests

Description

The `FunctionTestCase` class is a subclass of `TestCase` that allows function-based tests to use qualification functions in the `matlab.unittest.qualifications` package. For each test function, MATLAB creates an instance of the `FunctionTestCase` class and passes it to the test function.

The `functiontests` function constructs `FunctionTestCase` instances, so there is no need for test authors to construct this class directly.

See Also

See Also

matlab.unittest.TestCase | `functiontests` | `runtests`

Introduced in R2013b

gallery

Test matrices

Syntax

```
[A,B,C,...] = gallery(matname,P1,P2,...)
[A,B,C,...] = gallery(matname,P1,P2,...,classname)
gallery(3)
gallery(5)
```

Description

`[A,B,C,...] = gallery(matname,P1,P2,...)` returns the test matrices specified by `matname`. The `matname` input is the name of a matrix family selected from the table below. `P1,P2,...` are input parameters required by the individual matrix family. The number of optional parameters `P1,P2,...` used in the calling syntax varies from matrix to matrix. The exact calling syntaxes are detailed in the individual matrix descriptions below.

`[A,B,C,...] = gallery(matname,P1,P2,...,classname)` produces a matrix of class `classname`. The `classname` input must be either `'single'` or `'double'` (unless `matname` is `'integerdata'`, in which case `'int8'`, `'int16'`, `'int32'`, `'uint8'`, `'uint16'`, and `'uint32'` are also allowed). If `classname` is not specified, then the class of the matrix is determined from those arguments among `P1,P2,...` that do not specify dimensions or select an option. If any of these arguments is of class `single` then the matrix is `single`; otherwise the matrix is `double`.

`gallery(3)` is a badly conditioned 3-by-3 matrix and `gallery(5)` is an interesting eigenvalue problem.

The gallery holds over fifty different test matrix functions useful for testing algorithms and other purposes.

binomial — Multiple of involutory matrix

`A = gallery('binomial',n)` returns an `n`-by-`n` matrix,with integer entries such that `A^2 = 2^(n-1)*eye(n)`.

Thus, `B = A*2^((1-n)/2)` is involutory, that is, `B^2 = eye(n)`.

cauchy — Cauchy matrix

`C = gallery('cauchy',x,y)` returns an `n`-by-`n` matrix, `C(i,j) = 1/(x(i)+y(j))`. Arguments `x` and `y` are vectors of length `n`. If you pass in scalars for `x` and `y`, they are interpreted as vectors `1:x` and `1:y`.

`C = gallery('cauchy',x)` returns the same as above with `y = x`. That is, the command returns `C(i,j) = 1/(x(i)+x(j))`.

Explicit formulas are known for the inverse and determinant of a Cauchy matrix. The determinant `det(C)` is nonzero if `x` and `y` both have distinct elements. `C` is totally positive if `0 < x(1) <... < x(n)` and `0 < y(1) < ... < y(n)`.

chebspec — Chebyshev spectral differentiation matrix

`C = gallery('chebspec',n,switch)` returns a Chebyshev spectral differentiation matrix of order `n`. Argument `switch` is a variable that determines the character of the output matrix. By default, `switch` = `0`.

For `switch` = `0` ("no boundary conditions"), `C` is nilpotent (`C^n = 0`) and has the null vector `ones(n,1)`. The matrix `C` is similar to a Jordan block of size `n` with eigenvalue zero.

For `switch` = `1`, `C` is nonsingular and well-conditioned, and its eigenvalues have negative real parts.

The eigenvector matrix of the Chebyshev spectral differentiation matrix is ill-conditioned.

chebvand — Vandermonde-like matrix for the Chebyshev polynomials

`C = gallery('chebvand',p)` produces the (primal) Chebyshev Vandermonde matrix based on the vector of points `p`, which define where the Chebyshev polynomial is calculated.

`C = gallery('chebvand',m,p)` where `m` is scalar, produces a rectangular version of the above, with `m` rows.

If `p` is a vector, then $C(i,j) = T_{i-1}(p(j))$ where T_{i-1} is the Chebyshev polynomial of degree $i-1$. If `p` is a scalar, then `p` equally spaced points on the interval `[0,1]` are used to calculate `C`.

chow — Singular Toeplitz lower Hessenberg matrix

`A = gallery('chow',n,alpha,delta)` returns `A` such that `A = H(alpha) + delta*eye(n)`, where $H_{i,j}(\alpha) = \alpha^{(i-j+1)}$ and argument `n` is the order of the Chow matrix. Default value for scalars `alpha` and `delta` are `1` and `0`, respectively.

`H(alpha)` has `p = floor(n/2)` eigenvalues that are equal to zero. The rest of the eigenvalues are equal to `4*alpha*cos(k*pi/(n+2))^2, k=1:n-p`.

circul — Circulant matrix

`C = gallery('circul',v)` returns the circulant matrix whose first row is the vector `v`.

A circulant matrix has the property that each row is obtained from the previous one by cyclically permuting the entries one step forward. It is a special Toeplitz matrix in which the diagonals "wrap around."

If `v` is a scalar, then `C = gallery('circul',1:v)`.

The eigensystem of `C` (`n`-by-`n`) is known explicitly: If `t` is an `n`th root of unity, then the inner product of `v` and $w = [1\ t\ t^2\ \ldots\ t^{(n-1)}]$ is an eigenvalue of `C` and `w(n:-1:1)` is an eigenvector.

clement — Tridiagonal matrix with zero diagonal entries

`A = gallery('clement',n,k)` returns an `n`-by-`n` tridiagonal matrix with zeros on its main diagonal and known eigenvalues. It is singular if `n` is odd. About 64 percent of the entries of the inverse are zero. The eigenvalues include plus and minus the numbers `n-1`, `n-3`, `n-5`, `...`, (1 or 0).

For `k=0` (the default), `A` is nonsymmetric. For `k=1`, `A` is symmetric.

`gallery('clement',n,1)` is diagonally similar to `gallery('clement',n)`.

For odd `N = 2*M+1`, `M+1` of the singular values are the integers `sqrt((2*M+1)^2 - (2*K+1).^2)` for `K = 0:M`.

Note: Similar properties hold for `gallery('tridiag',x,y,z)` where `y = zeros(n,1)`. The eigenvalues still come in plus/minus pairs but they are not known explicitly.

compar — Comparison matrices

`A = gallery('compar',A,1)` returns `A` with each diagonal element replaced by its absolute value, and each off-diagonal element replaced by minus the absolute value of the largest element in absolute value in its row. However, if `A` is triangular `compar(A,1)` is too.

`gallery('compar',A)` is `diag(B) - tril(B,-1) - triu(B,1)`, where `B = abs(A)`. `compar(A)` is often denoted by M(*A*) in the literature.

`gallery('compar',A,0)` is the same as `gallery('compar',A)`.

condex — Counter-examples to matrix condition number estimators

`A = gallery('condex',n,k,theta)` returns a "counter-example" matrix to a condition estimator. It has order `n` and scalar parameter `theta` (default 100).

The matrix, its natural size, and the estimator to which it applies are specified by `k`:

`k = 1`	4-by-4	LINPACK
`k = 2`	3-by-3	LINPACK
`k = 3`	arbitrary	LINPACK (`rcond`) (independent of `theta`)
`k = 4`	`n >= 4`	LAPACK (RCOND) (default). It is the inverse of this matrix that is a counter-example.

If `n` is not equal to the natural size of the matrix, then the matrix is padded out with an identity matrix to order `n`.

cycol — Matrix whose columns repeat cyclically

`A = gallery('cycol',[m n],k)` returns an `m`-by-`n` matrix with cyclically repeating columns, where one "cycle" consists of `randn(m,k)`. Thus, the rank of matrix `A` cannot exceed `k`, and `k` must be a scalar.

Argument k defaults to `round(n/4)`, and need not evenly divide n.

`A = gallery('cycol',n,k)`, where n is a scalar, is the same as `gallery('cycol', [n n],k)`.

dorr — Diagonally dominant, ill-conditioned, tridiagonal matrix

`[c,d,e] = gallery('dorr',n,theta)` returns the vectors defining an n-by-n, row diagonally dominant, tridiagonal matrix that is ill-conditioned for small nonnegative values of `theta`. The default value of `theta` is `0.01`. The Dorr matrix itself is the same as `gallery('tridiag',c,d,e)`.

`A = gallery('dorr',n,theta)` returns the matrix itself, rather than the defining vectors.

dramadah — Matrix of zeros and ones whose inverse has large integer entries

`A = gallery('dramadah',n,k)` returns an n-by-n matrix of 0's and 1's for which `mu(A) = norm(inv(A),'fro')` is relatively large, although not necessarily maximal. An anti-Hadamard matrix A is a matrix with elements 0 or 1 for which `mu(A)` is maximal.

n and k must both be scalars. Argument k determines the character of the output matrix:

k = 1	Default. A is Toeplitz, with `abs(det(A)) = 1`, and `mu(A) > c(1.75)^n`, where c is a constant. The inverse of A has integer entries.
k = 2	A is upper triangular and Toeplitz. The inverse of A has integer entries.
k = 3	A has maximal determinant among lower Hessenberg (0,1) matrices. `det(A)` = the nth Fibonacci number. A is Toeplitz. The eigenvalues have an interesting distribution in the complex plane.

fiedler — Symmetric matrix

`A = gallery('fiedler',c)`, where c is a length n vector, returns the n-by-n symmetric matrix with elements `abs(n(i)-n(j))`. For scalar c, `A = gallery('fiedler',1:c)`.

Matrix A has a dominant positive eigenvalue and all the other eigenvalues are negative.

Explicit formulas for `inv(A)` and `det(A)` are given in [Todd, J., *Basic Numerical Mathematics*, Vol. 2: Numerical Algebra, Birkhauser, Basel, and Academic Press, New York, 1977, p. 159] and attributed to Fiedler. These indicate that `inv(A)` is tridiagonal except for nonzero `(1,n)` and `(n,1)` elements.

forsythe — Perturbed Jordan block

`A = gallery('forsythe',n,alpha,lambda)` returns the `n`-by-`n` matrix equal to the Jordan block with eigenvalue `lambda`, excepting that `A(n,1) = alpha`. The default values of scalars `alpha` and `lambda` are `sqrt(eps)` and `0`, respectively.

The characteristic polynomial of `A` is given by:

```
det(A-t*I) = (lambda-t)^N - alpha*(-1)^n.
```

frank — Matrix with ill-conditioned eigenvalues

`F = gallery('frank',n,k)` returns the Frank matrix of order `n`. It is upper Hessenberg with determinant `1`. If `k = 1`, the elements are reflected about the anti-diagonal `(1,n)` — `(n,1)`. The eigenvalues of `F` may be obtained in terms of the zeros of the Hermite polynomials. They are positive and occur in reciprocal pairs; thus if `n` is odd, `1` is an eigenvalue. `F` has `floor(n/2)` ill-conditioned eigenvalues — the smaller ones.

gcdmat — Greatest common divisor matrix

`A = gallery('gcdmat',n)` returns the `n`-by-`n` matrix with `(i,j)` entry `gcd(i,j)`. Matrix`A` is symmetric positive definite, and `A.^r` is symmetric positive semidefinite for all nonnegative `r`.

gearmat — Gear matrix

`A = gallery('gearmat',n,i,j)` returns the `n`-by-`n` matrix with ones on the sub- and super-diagonals, `sign(i)` in the `(1,abs(i))` position, `sign(j)` in the `(n,n+1-abs(j))` position, and zeros everywhere else. Arguments `i` and `j` default to `n` and `-n`, respectively.

Matrix `A` is singular, can have double and triple eigenvalues, and can be defective.

All eigenvalues are of the form `2*cos(a)` and the eigenvectors are of the form `[sin(w+a), sin(w+2*a), ..., sin(w+n*a)]`, where `a` and `w` are given in Gear, C. W., “A

Simple Set of Test Matrices for Eigenvalue Programs," *Math. Comp.*, Vol. 23 (1969), pp. 119-125.

grcar — Toeplitz matrix with sensitive eigenvalues

`A = gallery('grcar',n,k)` returns an `n`-by-`n` Toeplitz matrix with `-1`s on the subdiagonal, `1`s on the diagonal, and `k` superdiagonals of `1`s. The default is `k = 3`. The eigenvalues are sensitive.

hanowa — Matrix whose eigenvalues lie on a vertical line in the complex plane

`A = gallery('hanowa',n,d)` returns an `n`-by-`n` block `2`-by-`2` matrix of the form:

```
[d*eye(m) -diag(1:m)
diag(1:m) d*eye(m)]
```

Argument `n` is an even integer `n=2*m`. Matrix `A` has complex eigenvalues of the form `d ± k*i`, for `1 <= k <= m`. The default value of `d` is `-1`.

house — Householder matrix

`[v,beta,s] = gallery('house',x,k)` takes `x`, an `n`-element column vector, and returns `V` and `beta` such that `H*x = s*e1`. In this expression, `e1` is the first column of `eye(n)`, `abs(s) = norm(x)`, and `H = eye(n) - beta*V*V'` is a Householder matrix.

`k` determines the sign of `s`:

`k = 0`	`sign(s) = -sign(x(1))` (default)
`k = 1`	`sign(s) = sign(x(1))`
`k = 2`	`sign(s) = 1` (`x` must be real)

If `x` is complex, then `sign(x) = x./abs(x)` when `x` is nonzero.

If `x = 0`, or if `x = alpha*e1` (`alpha >= 0`) and either `k = 1` or `k = 2`, then `V = 0`, `beta = 1`, and `s = x(1)`. In this case, `H` is the identity matrix, which is not strictly a Householder matrix.

`[v, beta] = gallery('house',x)` takes `x`, a scalar or `n`-element column vector, and returns `v` and `beta` such that `eye(n,n) - beta*v*v'` is a Householder matrix. A Householder matrix `H` satisfies the relationship

```
H*x = -sign(x(1))*norm(x)*e1
```

where `e1` is the first column of `eye(n,n)`. Note that if `x` is complex, then `sign(x) = exp(i*arg(x))` (which equals `x./abs(x)` when `x` is nonzero).

If `x = 0`, then `v = 0` and `beta = 1`.

integerdata — Array of arbitrary data from uniform distribution on specified range of integers

`A = gallery('integerdata',imax,[m,n,...],j)` returns an `m`-by-`n`-by-... array `A` whose values are a sample from the uniform distribution on the integers `1:imax`. `j` must be an integer value in the interval `[0, 2^32-1]`. Calling `gallery('integerdata', ...)` with different values of `J` will return different arrays. Repeated calls to `gallery('integerdata',...)` with the same `imax`, size vector and j inputs will always return the same array.

In any call to `gallery('integerdata', ...)` you can substitute individual inputs `m`,`n`,... for the size vector input `[m,n,...]`. For example, `gallery('integerdata',7,[1,2,3,4],5)` is equivalent to `gallery('integerdata',7,1,2,3,4,5)`.

`A = gallery('integerdata',[imin imax],[m,n,...],j)` returns an `m`-by-`n`-by-... array `A` whose values are a sample from the uniform distribution on the integers `imin:imax`.

`[A,B,...] = gallery('integerdata',[imin imax],[m,n,...],j)` returns multiple `m`-by-`n`-by-... arrays `A`, `B`, ..., containing different values.

`A = gallery('integerdata',[imin imax],[m,n,...],j,classname)` produces an array of class `classname`. `classname` must be `'uint8'`, `'uint16'`, `'uint32'`, `'int8'`, `'int16'`, `int32'`, `'single'` or `'double'`.

invhess — Inverse of an upper Hessenberg matrix

`A = gallery('invhess',x,y)`, where `x` is a length `n` vector and `y` is a length `n-1` vector, returns the matrix whose lower triangle agrees with that of `ones(n,1)*x'` and whose strict upper triangle agrees with that of `[1 y]*ones(1,n)`.

The matrix is nonsingular if `x(1) ~= 0` and `x(i+1) ~= y(i)` for all `i`, and its inverse is an upper Hessenberg matrix. Argument `y` defaults to `-x(1:n-1)`.

If `x` is a scalar, `invhess(x)` is the same as `invhess(1:x)`.

invol — Involutory matrix

`A = gallery('invol',n)` returns an `n`-by-`n` involutory `(A*A = eye(n))` and ill-conditioned matrix. It is a diagonally scaled version of `hilb(n)`.

`B = (eye(n)-A)/2` and `B = (eye(n)+A)/2` are idempotent `(B*B = B)`.

ipjfact — Hankel matrix with factorial elements

`[A,d] = gallery('ipjfact',n,k)` returns `A`, an `n`-by-`n` Hankel matrix, and `d`, the determinant of `A`, which is known explicitly. If `k = 0` (the default), then the elements of `A` are `A(i,j) = (i+j)!`. If `k = 1`, then the elements of `A` are `A(i,j) = 1/(i+j)`.

Note that the inverse of `A` is also known explicitly.

jordbloc — Jordan block

`A = gallery('jordbloc',n,lambda)` returns the `n`-by-`n` Jordan block with eigenvalue `lambda`. The default value for `lambda` is `1`.

kahan — Upper trapezoidal matrix

`A = gallery('kahan',n,theta,pert)` returns an upper trapezoidal matrix that has interesting properties regarding estimation of condition and rank.

If `n` is a two-element vector, then `A` is `n(1)`-by-`n(2)`; otherwise, `A` is `n`-by-`n`. The useful range of `theta` is `0 < theta < pi`, with a default value of `1.2`.

To ensure that the QR factorization with column pivoting does not interchange columns in the presence of rounding errors, the diagonal is perturbed by `pert*eps*diag([n:-1:1])`. The default `pert` is `25`, which ensures no interchanges for `gallery('kahan',n)` up to at least `n = 90` in IEEE arithmetic.

kms — Kac-Murdock-Szego Toeplitz matrix

`A = gallery('kms',n,rho)` returns the `n`-by-`n` Kac-Murdock-Szego Toeplitz matrix such that `A(i,j) = rho^(abs(i-j))`, for real `rho`.

For complex `rho`, the same formula holds except that elements below the diagonal are conjugated. `rho` defaults to 0.5.

The KMS matrix `A` has these properties:

- An LDL' factorization with `L = inv(gallery('triw',n,-rho,1))'`, and `D(i,i) = (1-abs(rho)^2)*eye(n)`, except `D(1,1) = 1`.
- Positive definite if and only if `0 < abs(rho) < 1`.
- The inverse `inv(A)` is tridiagonal.

krylov — Krylov matrix

`B = gallery('krylov',A,x,j)` returns the Krylov matrix

```
[x, Ax, A^2x, ..., A^(j-1)x]
```

where `A` is an `n`-by-`n` matrix and `x` is a length `n` vector. The defaults are `x = ones(n,1)`, and `j = n`.

`B = gallery('krylov',n)` is the same as `gallery('krylov',randn(n))`.

lauchli — Rectangular matrix

`A = gallery('lauchli',n,mu)` returns the `(n+1)`-by-`n` matrix

```
[ones(1,n); mu*eye(n)]
```

The Lauchli matrix is a well-known example in least squares and other problems that indicates the dangers of forming `A'*A`. Argument `mu` defaults to `sqrt(eps)`.

lehmer — Symmetric positive definite matrix

`A = gallery('lehmer',n)` returns the symmetric positive definite `n`-by-`n` matrix such that `A(i,j) = i/j` for `j >= i`.

The Lehmer matrix A has these properties:

- A is totally nonnegative.
- The inverse `inv(A)` is tridiagonal and explicitly known.
- The order `n <= cond(A) <= 4*n*n`.

leslie — Matrix of birth numbers and survival rates

`L = gallery('leslie',a,b)` is the n-by-n matrix from the Leslie population model with average birth numbers `a(1:n)` and survival rates `b(1:n-1)`. It is zero, apart from the first row (which contains the `a(i)`) and the first subdiagonal (which contains the `b(i)`). For a valid model, the `a(i)` are nonnegative and the `b(i)` are positive and bounded by 1, i.e., `0 < b(i) <= 1`.

`L = gallery('leslie',n)` generates the Leslie matrix with `a = ones(n,1)`, `b = ones(n-1,1)`.

lesp — Tridiagonal matrix with real, sensitive eigenvalues

`A = gallery('lesp',n)` returns an n-by-n matrix whose eigenvalues are real and smoothly distributed in the interval approximately `[-2*N-3.5, -4.5]`.

The sensitivities of the eigenvalues increase exponentially as the eigenvalues grow more negative. The matrix is similar to the symmetric tridiagonal matrix with the same diagonal entries and with off-diagonal entries 1, via a similarity transformation with `D = diag(1!,2!,...,n!)`.

lotkin — Lotkin matrix

`A = gallery('lotkin',n)` returns the Hilbert matrix with its first row altered to all ones. The Lotkin matrix A is nonsymmetric, ill-conditioned, and has many negative eigenvalues of small magnitude. Its inverse has integer entries and is known explicitly.

minij — Symmetric positive definite matrix

`A = gallery('minij',n)` returns the n-by-n symmetric positive definite matrix with `A(i,j) = min(i,j)`.

The `minij` matrix has these properties:

- The inverse `inv(A)` is tridiagonal and equal to `-1` times the second difference matrix, except its `(n,n)` element is `1`.
- Givens' matrix, `2*A-ones(size(A))`, has tridiagonal inverse and eigenvalues `0.5*sec((2*r-1)*pi/(4*n))^2`, where `r=1:n`.
- `(n+1)*ones(size(A))-A` has elements that are `max(i,j)` and a tridiagonal inverse.

moler — Symmetric positive definite matrix

`A = gallery('moler',n,alpha)` returns the symmetric positive definite `n`-by-`n` matrix `U'*U`, where `U = gallery('triw',n,alpha)`.

For the default `alpha` = `-1`, `A(i,j) = min(i,j)-2`, and `A(i,i) = i`. One of the eigenvalues of `A` is small.

neumann — Singular matrix from the discrete Neumann problem (sparse)

`C = gallery('neumann',n)` returns the sparse `n`-by-`n` singular, row diagonally dominant matrix resulting from discretizing the Neumann problem with the usual five-point operator on a regular mesh. Argument `n` is a perfect square integer $n = m^2$ or a two-element vector. `C` is sparse and has a one-dimensional null space with null vector `ones(n,1)`.

normaldata — Array of arbitrary data from standard normal distribution

`A = gallery('normaldata',[m,n,...],j)` returns an `m`-by-`n`-by-... array `A`. The values of `A` are a random sample from the standard normal distribution. `j` must be an integer value in the interval `[0, 2^32-1]`. Calling `gallery('normaldata', ...)` with different values of `j` will return different arrays. Repeated calls to `gallery('normaldata',...)` with the same size vector and `j` inputs will always return the same array.

In any call to `gallery('normaldata', ...)` you can substitute individual inputs `m`,`n`,... for the size vector input `[m,n,...]`. For example, `gallery('normaldata', [1,2,3,4],5)` is equivalent to `gallery('normaldata',1,2,3,4,5)`.

`[A,B,...] = gallery('normaldata',[m,n,...],j)` returns multiple `m`-by-`n`-by-... arrays `A`, `B`, ..., containing different values.

`A = gallery('normaldata',[m,n,...],j, classname)` produces a matrix of class `classname`. `classname` must be either `'single'` or `'double'`.

Generate the arbitrary 6-by-4 matrix of data from the standard normal distribution `N(0, 1)` corresponding to `j = 2`:.

```
x = gallery('normaldata', [6, 4], 2);
```

Generate the arbitrary 1-by-2-by-3 single array of data from the standard normal distribution `N(0, 1)` corresponding to `j = 17`:.

```
y = gallery('normaldata', 1, 2, 3, 17, 'single');
```

orthog — Orthogonal and nearly orthogonal matrices

`Q = gallery('orthog',n,k)` returns the kth type of matrix of order `n`, where `k > 0` selects exactly orthogonal matrices, and `k < 0` selects diagonal scalings of orthogonal matrices. Available types are:

`k = 1`	`Q(i,j) = sqrt(2/(n+1)) * sin(i*j*pi/(n+1))` Symmetric eigenvector matrix for second difference matrix. This is the default.
`k = 2`	`Q(i,j) = 2/(sqrt(2*n+1)) * sin(2*i*j*pi/(2*n+1))` Symmetric.
`k = 3`	`Q(r,s) = exp(2*pi*i*(r-1)*(s-1)/n) / sqrt(n)` Unitary, the Fourier matrix. Q^4 is the identity. This is essentially the same matrix as `fft(eye(n))/sqrt(n)!`
`k = 4`	Helmert matrix: a permutation of a lower Hessenberg matrix, whose first row is `ones(1:n)/sqrt(n)`.
`k = 5`	`Q(i,j) = sin(2*pi*(i-1)*(j-1)/n) + cos(2*pi*(i-1)*(j-1)/n)` Symmetric matrix arising in the Hartley transform.

`k = 6`	`Q(i,j) = sqrt(2/n)*cos((i-1/2)*(j-1/2)*pi/n)` Symmetric matrix arising as a discrete cosine transform.
`k = -1`	`Q(i,j) = cos((i-1)*(j-1)*pi/(n-1))` Chebyshev Vandermonde-like matrix, based on extrema of `T(n-1)`.
`k = -2`	`Q(i,j) = cos((i-1)*(j-1/2)*pi/n)` Chebyshev Vandermonde-like matrix, based on zeros of `T(n)`.

parter — Toeplitz matrix with singular values near pi

`C = gallery('parter',n)` returns the matrix `C` such that `C(i,j) = 1/(i-j+0.5)`.

`C` is a Cauchy matrix and a Toeplitz matrix. Most of the singular values of `C` are very close to `pi`.

pei — Pei matrix

`A = gallery('pei',n,alpha)`, where `alpha` is a scalar, returns the symmetric matrix `alpha*eye(n) + ones(n)`. The default for `alpha` is 1. The matrix is singular for `alpha` equal to either `0` or `-n`.

poisson — Block tridiagonal matrix from Poisson's equation (sparse)

`A = gallery('poisson',n)` returns the block tridiagonal (sparse) matrix of order `n^2` resulting from discretizing Poisson's equation with the 5-point operator on an `n`-by-`n` mesh.

prolate — Symmetric, ill-conditioned Toeplitz matrix

`A = gallery('prolate',n,w)` returns the `n`-by-`n` prolate matrix with parameter `w`. It is a symmetric Toeplitz matrix.

If `0 < w < 0.5` then `A` is positive definite

- The eigenvalues of `A` are distinct, lie in `(0,1)`, and tend to cluster around `0` and `1`.
- The default value of `w` is 0.25.

randcolu — Random matrix with normalized cols and specified singular values

`A = gallery('randcolu',n)` is a random `n`-by-`n` matrix with columns of unit 2-norm, with random singular values whose squares are from a uniform distribution.

`A'*A` is a correlation matrix of the form produced by `gallery('randcorr',n)`.

`gallery('randcolu',x)` where `x` is an `n`-vector (`n` > 1), produces a random `n`-by-`n` matrix having singular values given by the vector `x`. The vector `x` must have nonnegative elements whose sum of squares is `n`.

`gallery('randcolu',x,m)` where `m >= n`, produces an `m`-by-`n` matrix.

`gallery('randcolu',x,m,k)` provides a further option:

`k = 0`	`diag(x)` is initially subjected to a random two-sided orthogonal transformation, and then a sequence of Givens rotations is applied (default).
`k = 1`	The initial transformation is omitted. This is much faster, but the resulting matrix may have zero entries.

For more information, see [4].

randcorr — Random correlation matrix with specified eigenvalues

`gallery('randcorr',n)` is a random `n`-by-`n` correlation matrix with random eigenvalues from a uniform distribution. A correlation matrix is a symmetric positive semidefinite matrix with `1`s on the diagonal (see `corrcoef`).

`gallery('randcorr',x)` produces a random correlation matrix having eigenvalues given by the vector `x`, where `length(x) > 1`. The vector `x` must have nonnegative elements summing to `length(x)`.

`gallery('randcorr',x,k)` provides a further option:

`k = 0`	The diagonal matrix of eigenvalues is initially subjected to a random orthogonal similarity transformation, and then a sequence of Givens rotations is applied (default).

`k = 1`	The initial transformation is omitted. This is much faster, but the resulting matrix may have some zero entries.

For more information, see [3] and [4].

randhess — Random, orthogonal upper Hessenberg matrix

`H = gallery('randhess',n)` returns an `n`-by-`n` real, random, orthogonal upper Hessenberg matrix.

`H = gallery('randhess',x)` if `x` is an arbitrary, real, length `n` vector with `n > 1`, constructs `H` nonrandomly using the elements of `x` as parameters.

Matrix `H` is constructed via a product of `n-1` Givens rotations.

randjorth — Random J-orthogonal matrix

`A = gallery('randjorth', n)`, for a positive integer `n`, produces a random `n`-by-`n` `J`-orthogonal matrix `A`, where

- `J = blkdiag(eye(ceil(n/2)),-eye(floor(n/2)))`
- `cond(A) = sqrt(1/eps)`

`J`-orthogonality means that A'*J*A = J. Such matrices are sometimes called *hyperbolic*.

`A = gallery('randjorth', n, m)`, for positive integers `n` and `m`, produces a random (`n+m`)-by-(`n+m`) `J`-orthogonal matrix `A`, where

- `J = blkdiag(eye(n),-eye(m))`
- `cond(A) = sqrt(1/eps)`

```
A = gallery('randjorth',n,m,c,symm,method)
```

uses the following optional input arguments:

- `c` — Specifies `cond(A)` to be the scalar `c`.
- `symm` — Enforces symmetry if the scalar `symm` is nonzero.
- `method` — calls `qr` to perform the underlying orthogonal transformations if the scalar `method` is nonzero. A call to `qr` is much faster than the default method for large dimensions

rando — Random matrix composed of elements -1, 0 or 1

`A = gallery('rando',n,k)` returns a random `n`-by-`n` matrix with elements from one of the following discrete distributions:

`k = 1`	`A(i,j)` = `0` or `1` with equal probability (default).
`k = 2`	`A(i,j)` = `-1` or `1` with equal probability.
`k = 3`	`A(i,j)` = `-1`, `0` or `1` with equal probability.

Argument `n` may be a two-element vector, in which case the matrix is `n(1)`-by-`n(2)`.

randsvd — Random matrix with preassigned singular values

`A = gallery('randsvd',n,kappa,mode,kl,ku)` returns a banded (multidiagonal) random matrix of order `n` with `cond(A) = kappa` and singular values from the distribution `mode`. If `n` is a two-element vector, `A` is `n(1)`-by-`n(2)`.

Arguments `kl` and `ku` specify the number of lower and upper off-diagonals, respectively, in `A`. If they are omitted, a full matrix is produced. If only `kl` is present, `ku` defaults to `kl`.

Distribution `mode` can be:

`1`	One large singular value.
`2`	One small singular value.
`3`	Geometrically distributed singular values (default).
`4`	Arithmetically distributed singular values.
`5`	Random singular values with uniformly distributed logarithm.
`< 0`	If `mode` is `-1`, `-2`, `-3`, `-4`, or `-5`, then `randsvd` treats `mode` as `abs(mode)`, except that in the original matrix of singular values the order of the diagonal entries is reversed: small to large instead of large to small.

Condition number `kappa` defaults to `sqrt(1/eps)`. In the special case where `kappa < 0`, `A` is a random, full, symmetric, positive definite matrix with `cond(A) = -kappa` and eigenvalues distributed according to `mode`. Arguments `kl` and `ku`, if present, are ignored.

`A = gallery('randsvd',n,kappa,mode,kl,ku,method)` specifies how the computations are carried out. `method = 0` is the default, while `method = 1` uses an

alternative method that is much faster for large dimensions, even though it uses more flops.

redheff — Redheffer's matrix of 1s and 0s

`A = gallery('redheff',n)` returns an `n`-by-`n` matrix of `0`'s and `1`'s defined by `A(i,j) = 1`, if `j = 1` or if `i` divides `j`, and `A(i,j) = 0` otherwise.

The Redheffer matrix has these properties:

- `(n-floor(log2(n)))-1` eigenvalues equal to `1`
- A real eigenvalue (the spectral radius) approximately `sqrt(n)`
- A negative eigenvalue approximately `-sqrt(n)`
- The remaining eigenvalues are provably "small."
- The Riemann hypothesis is true if and only if $\det(A) = O(n^{1/2+\varepsilon})$ for every $\varepsilon >$ `0`.

Barrett and Jarvis conjecture that "the small eigenvalues all lie inside the unit circle `abs(Z) = 1`," and a proof of this conjecture, together with a proof that some eigenvalue tends to zero as `n` tends to infinity, would yield a new proof of the prime number theorem.

riemann — Matrix associated with the Riemann hypothesis

`A = gallery('riemann',n)` returns an `n`-by-`n` matrix for which the Riemann hypothesis is true if and only if

$$\det(A) = O(n!n^{-1/2+\varepsilon})$$

for every $\varepsilon > 0$.

The Riemann matrix is defined by:

```
A = B(2:n+1,2:n+1)
```

where `B(i,j) = i-1` if `i` divides `j`, and `B(i,j) = -1` otherwise.

The Riemann matrix has these properties:

- Each eigenvalue `e(i)` satisfies `abs(e(i)) <= m-1/m`, where `m = n+1`.
- `i <= e(i) <= i+1` with at most `m-sqrt(m)` exceptions.

- All integers in the interval `(m/3, m/2]` are eigenvalues.

ris — Symmetric Hankel matrix

`A = gallery('ris',n)` returns a symmetric `n`-by-`n` Hankel matrix with elements

```
A(i,j) = 0.5/(n-i-j+1.5)
```

The eigenvalues of `A` cluster around $\pi/2$ and $-\pi/2$. This matrix was invented by F.N. Ris.

sampling — Nonsymmetric matrix with ill-conditioned integer eigenvalues.

`A = gallery('sampling',x)`, where `x` is an `n`-vector, is the `n`-by-`n` matrix with `A(i,j) = X(i)/(X(i)-X(j))` for `i ~= j` and `A(j,j)` the sum of the off-diagonal elements in column `j`. A has eigenvalues `0:n-1`. For the eigenvalues 0 and `n`–1, corresponding eigenvectors are `X` and `ones(n,1)`, respectively.

The eigenvalues are ill-conditioned. `A` has the property that `A(i,j) + A(j,i) = 1` for `i ~= j`.

Explicit formulas are available for the left eigenvectors of `A`. For scalar `n`, `sampling(n)` is the same as `sampling(1:n)`. A special case of this matrix arises in sampling theory.

smoke — Complex matrix with a 'smoke ring' pseudospectrum

`A = gallery('smoke',n)` returns an `n`-by-`n` matrix with `1`'s on the superdiagonal, `1` in the `(n,1)` position, and powers of roots of unity along the diagonal.

`A = gallery('smoke',n,1)` returns the same except that element `A(n,1)` is zero.

The eigenvalues of `gallery('smoke',n,1)` are the `n`th roots of unity; those of `gallery('smoke',n)` are the `n`th roots of unity times `2^(1/n)`.

toeppd — Symmetric positive definite Toeplitz matrix

`A = gallery('toeppd',n,m,w,theta)` returns an `n`-by-`n` symmetric, positive semi-definite (SPD) Toeplitz matrix composed of the sum of `m` rank 2 (or, for certain `theta`, rank 1) SPD Toeplitz matrices. Specifically,

```
T = w(1)*T(theta(1)) + ... + w(m)*T(theta(m))
```

where `T(theta(k))` has `(i,j)` element `cos(2*pi*theta(k)*(i-j))`.

By default: `m = n`, `w = rand(m,1)`, and `theta = rand(m,1)`.

toeppen — Pentadiagonal Toeplitz matrix (sparse)

`P = gallery('toeppen',n,a,b,c,d,e)` returns the `n`-by-`n` sparse, pentadiagonal Toeplitz matrix with the diagonals: `P(3,1) = a`, `P(2,1) = b`, `P(1,1) = c`, `P(1,2) = d`, and `P(1,3) = e`, where `a`, `b`, `c`, `d`, and `e` are scalars.

By default, `(a,b,c,d,e)` = `(1,-10,0,10,1)`, yielding a matrix of Rutishauser. This matrix has eigenvalues lying approximately on the line segment `2*cos(2*t) + 20*i*sin(t)`.

tridiag — Tridiagonal matrix (sparse)

`A = gallery('tridiag',c,d,e)` returns the tridiagonal matrix with subdiagonal `c`, diagonal `d`, and superdiagonal `e`. Vectors `c` and `e` must have `length(d)-1`.

`A = gallery('tridiag',n,c,d,e)`, where `c`, `d`, and `e` are all scalars, yields the Toeplitz tridiagonal matrix of order `n` with subdiagonal elements `c`, diagonal elements `d`, and superdiagonal elements `e`. This matrix has eigenvalues

```
d + 2*sqrt(c*e)*cos(k*pi/(n+1))
```

where `k = 1:n`. (see [1].)

`A = gallery('tridiag',n)` is the same as `A = gallery('tridiag',n,-1,2,-1)`, which is a symmetric positive definite M-matrix (the negative of the second difference matrix).

triw — Upper triangular matrix discussed by Wilkinson and others

`A = gallery('triw',n,alpha,k)` returns the upper triangular matrix with ones on the diagonal and `alpha`s on the first `k >= 0` superdiagonals.

Order `n` may be a 2-element vector, in which case the matrix is `n(1)`-by-`n(2)` and upper trapezoidal.

Ostrowski [“On the Spectrum of a One-parametric Family of Matrices,” *J. Reine Angew. Math.,* 1954] shows that

```
cond(gallery('triw',n,2)) = cot(pi/(4*n))^2,
```

and, for large `abs(alpha)`, `cond(gallery('triw',n,alpha))` is approximately `abs(alpha)^n*sin(pi/(4*n-2))`.

Adding `-2^(2-n)` to the `(n,1)` element makes `triw(n)` singular, as does adding `-2^(1-n)` to all the elements in the first column.

uniformdata — Array of arbitrary data from standard uniform distribution

`A = gallery('uniformdata',[m,n,...],j)` returns an `m`-by-`n`-by-... array `A`. The values of `A` are a random sample from the standard uniform distribution. j must be an integer value in the interval `[0, 2^32-1]`. Calling `gallery('uniformdata', ...)` with different values of `j` will return different arrays. Repeated calls to `gallery('uniformdata',...)` with the same size vector and `j` inputs will always return the same array.

In any call to `gallery('uniformdata', ...)` you can substitute individual inputs `m`,`n`,... for the size vector input `[m,n,...]`. For example, `gallery('uniformdata', [1,2,3,4],5)` is equivalent to `gallery('uniformdata',1,2,3,4,5)`.

`[A,B,...] = gallery('uniformdata',[m,n,...],j)` returns multiple `m`-by-`n`-by-... arrays `A`, `B`, ..., containing different values.

`A = gallery('uniformdata',[m,n,...],j, classname)` produces a matrix of class `classname`. `classname` must be either `'single'` or `'double'`.

Generate the arbitrary 6-by-4 matrix of data from the uniform distribution on [0, 1] corresponding to `j = 2`.

```
x = gallery('uniformdata', [6, 4], 2);
```

Generate the arbitrary 1-by-2-by-3 single array of data from the uniform distribution on [0, 1] corresponding to `j = 17`.

```
y = gallery('uniformdata', 1, 2, 3, 17, 'single');
```

wathen — Finite element matrix (sparse, random entries)

`A = gallery('wathen',nx,ny)` returns a sparse, random, `n`-by-`n` finite element matrix where `n = 3*nx*ny + 2*nx + 2*ny + 1`.

Matrix A is precisely the "consistent mass matrix" for a regular nx-by-ny grid of 8-node (serendipity) elements in two dimensions. A is symmetric, positive definite for any (positive) values of the "density," rho(nx,ny), which is chosen randomly in this routine.

A = gallery('wathen',nx,ny,1) returns a diagonally scaled matrix such that

```
0.25 <= eig(inv(D)*A) <= 4.5
```

where D = diag(diag(A)) for any positive integers nx and ny and any densities rho(nx,ny).

wilk — Various matrices devised or discussed by Wilkinson

gallery('wilk',n) returns a different matrix or linear system depending on the value of n.

n = 3	Upper triangular system Ux=b illustrating inaccurate solution.
n = 4	Lower triangular system Lx=b, ill-conditioned.
n = 5	hilb(6)(1:5,2:6)*1.8144. A symmetric positive definite matrix.
n = 21	W21+, a tridiagonal matrix. eigenvalue problem. For more detail, see [2].

References

[1] The *MATLAB* gallery of test matrices is based upon the work of Nicholas J. Higham at the Department of Mathematics, University of Manchester, Manchester, England. Further background can be found in the books *MATLAB Guide, Second Edition*, Desmond J. Higham and Nicholas J. Higham, SIAM, 2005, and *Accuracy and Stability of Numerical Algorithms,* Nicholas J. Higham, SIAM, 1996.

[2] Wilkinson, J. H., *The Algebraic Eigenvalue Problem*, Oxford University Press, London, 1965, p.308.

[3] Bendel, R. B. and M. R. Mickey, "Population Correlation Matrices for Sampling Experiments," *Commun. Statist. Simulation Comput.*, B7, 1978, pp. 163-182.

[4] Davies, P. I. and N. J. Higham, "Numerically Stable Generation of Correlation Matrices and Their Factors," *BIT*, Vol. 40, 2000, pp. 640-651.

See Also

`hadamard` | `magic` | `hilb` | `invhilb` | `wilkinson`

Introduced before R2006a

gamma

Gamma function

Syntax

```
Y = gamma(X)
```

Description

`Y = gamma(X)` returns the `gamma` function evaluated at the elements of `X`.

Examples

Evaluate Gamma Function

Evaluate the gamma function with a scalar and a vector.

Evaluate $\Gamma(0.5)$, which is equal to $\sqrt{\pi}$.

```
y = gamma(0.5)
```

```
y = 1.7725
```

Evaluate several values of the gamma function between `[-3.5 3.5]`.

```
x = -3.5:3.5;
y = gamma(x)
```

```
y =

    0.2701   -0.9453    2.3633   -3.5449    1.7725    0.8862    1.3293    3.3234
```

Plot Gamma Function

Plot the gamma function and its inverse.

Use `fplot` to plot the gamma function and its inverse. The gamma function increases quickly for positive arguments and has simple poles at all negative integer arguments (as well as 0). The function does not have any zeros. Conversely, the inverse gamma function has zeros at all negative integer arguments (as well as 0).

```
fplot(@gamma)
hold on
fplot(@(x) 1./gamma(x))
legend('\Gamma(x)','1/\Gamma(x)')
hold off
grid on
```

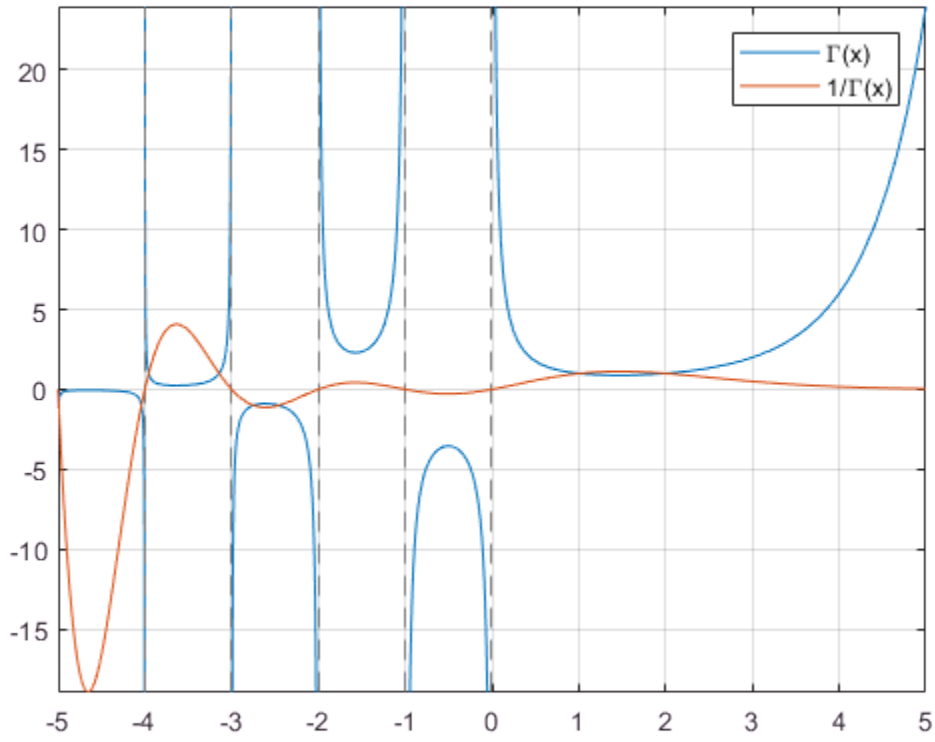

Input Arguments

X — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. The elements of X must be real.

Data Types: single | double

Definitions

Gamma Function

The gamma function is defined for real x > 0 by the integral:

$$\Gamma(x) = \int_0^\infty e^{-t} t^{x-1} dt$$

The gamma function interpolates the factorial function. For integer n:

```
gamma(n+1) = factorial(n) = prod(1:n)
```

The domain of the gamma function extends to negative real numbers by analytic continuation, with simple poles at the negative integers. This extension arises from repeated application of the recursion relation

$$\Gamma(n-1) = \frac{\Gamma(n)}{n-1}.$$

Algorithms

The computation of gamma is based on algorithms outlined in [1]. Several different minimax rational approximations are used depending upon the value of A.

References

[1] Cody, J., *An Overview of Software Development for Special Functions*, Lecture Notes in Mathematics, 506, Numerical Analysis Dundee, G. A. Watson (ed.), Springer Verlag, Berlin, 1976.

[2] Abramowitz, M. and I.A. Stegun, *Handbook of Mathematical Functions*, National Bureau of Standards, Applied Math. Series #55, Dover Publications, 1965, sec. 6.5.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`factorial` | `gammainc` | `gammaincinv` | `gammaln` | `psi`

Introduced before R2006a

gammainc

Incomplete gamma function

Syntax

```
Y = gammainc(X,A)
Y = gammainc(X,A,tail)
Y = gammainc(X,A,'scaledlower')
Y = gammainc(X,A,'scaledupper')
```

Description

`Y = gammainc(X,A)` returns the incomplete `gamma` function of corresponding elements of `X` and `A`. The elements of `A` must be nonnegative. Furthermore, `X` and `A` must be real and the same size (or either can be scalar).

`Y = gammainc(X,A,tail)` specifies the tail of the incomplete `gamma` function. The choices for `tail` are `'lower'` (the default) and `'upper'`. The upper incomplete `gamma` function is defined as:

$$\texttt{gammainc}(\texttt{x,a,'upper'}) = \frac{1}{\Gamma(a)} \int_x^\infty t^{a-1} e^{-t} dt$$

When the upper tail value is close to 0, the `'upper'` option provides a way to compute that value more accurately than by subtracting the lower tail value from 1.

`Y = gammainc(X,A,'scaledlower')` and `Y = gammainc(X,A,'scaledupper')` return the incomplete gamma function, scaled by

$$\Gamma(a+1)\left(\frac{e^x}{x^a}\right).$$

These functions are unbounded above, but are useful for values of `X` and `A` where `gammainc(X,A,'lower')` or `gammainc(X,A,'upper')` underflow to zero.

Note: When `X` is negative, `Y` can be inaccurate for `abs(X)>A+1`. This applies to all syntaxes.

Definitions

Incomplete Gamma Function

The incomplete gamma function is

$$\texttt{gammainc}(\texttt{x},\texttt{a}) = \frac{1}{\Gamma(a)}\int_0^x t^{a-1}e^{-t}dt$$

where $\Gamma(a)$ is the gamma function, `gamma(a)`.

For any $A \geq 0$, `gammainc(X,A)` approaches 1 as `X` approaches infinity. For small `X` and `A`, `gammainc(X,A)` is approximately equal to `X^A`, so `gammainc(0,0) = 1`.

References

[1] Cody, J., *An Overview of Software Development for Special Functions*, Lecture Notes in Mathematics, 506, Numerical Analysis Dundee, G. A. Watson (ed.), Springer Verlag, Berlin, 1976.

[2] Abramowitz, M. and I.A. Stegun, *Handbook of Mathematical Functions*, National Bureau of Standards, Applied Math. Series #55, Dover Publications, 1965, sec. 6.5.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Output is always complex.

See Also

`gamma` | `gammaincinv` | `psi` | `gammaln`

Introduced before R2006a

gammaincinv

Inverse incomplete gamma function

Syntax

```
x = gammaincinv(y,a)
x = gammaincinv(y,a,tail)
```

Description

`x = gammaincinv(y,a)` evaluates the inverse incomplete gamma function for corresponding elements of `y` and `a`, such that `y = gammainc(x,a)`. The elements of `y` must be in the closed interval `[0,1]`, and those of `a` must be nonnegative. `y` and `a` must be real and the same size (or either can be a scalar).

`x = gammaincinv(y,a,tail)` specifies the tail of the incomplete gamma function. Choices are `'lower'` (the default) to use the integral from 0 to `x`, or `'upper'` to use the integral from `x` to infinity.

These two choices are related as:

`gammaincinv(y,a,'upper') = gammaincinv(1-y,a,'lower')`.

When `y` is close to 0, the `'upper'` option provides a way to compute `x` more accurately than by subtracting `y` from 1.

Definitions

Inverse Incomplete Gamma Function

The lower incomplete gamma function is defined as:

$$\texttt{gammainc}(\texttt{x},\texttt{a}) = \frac{1}{\Gamma(a)}\int_0^x t^{a-1}e^{-t}dt$$

where $\Gamma(a)$ is the gamma function, `gamma(a)`. The upper incomplete gamma function is defined as:

$$\texttt{gammainc}(\texttt{x,a,'upper'}) = \frac{1}{\Gamma(a)}\int_x^\infty t^{a-1}e^{-t}dt$$

`gammaincinv` computes the inverse of the incomplete gamma function with respect to the integration limit `x` using Newton's method.

For any `a>0`, as `y` approaches 1, `gammaincinv(y,a)` approaches infinity. For small `x` and `a`, `gammainc(x,a)` $\cong x^a$, so `gammaincinv(1,0) = 0`.

References

[1] Cody, J., *An Overview of Software Development for Special Functions*, Lecture Notes in Mathematics, 506, Numerical Analysis Dundee, G. A. Watson (ed.), Springer Verlag, Berlin, 1976.

[2] Abramowitz, M. and I.A. Stegun, *Handbook of Mathematical Functions*, National Bureau of Standards, Applied Math. Series #55, Dover Publications, 1965, sec. 6.5.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Output is always complex.

See Also

`gamma` | `gammainc` | `psi` | `gammaln`

gammaln

Logarithm of gamma function

Syntax

```
Y = gammaln(A)
```

Description

`Y = gammaln(A)` returns the logarithm of the `gamma` function, `gammaln(A) = log(gamma(A))`. Input `A` must be nonnegative and real. The `gammaln` command avoids the underflow and overflow that may occur if it is computed directly using `log(gamma(A))`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`gammainc` | `gammaincinv` | `gamma` | `psi`

Introduced before R2006a

gather

Collect tall array into memory after executing queued operations

Syntax

```
Y = gather(X)
[Y1,Y2,Y3,...] = gather(X1,X2,X3,...)
```

Description

`Y = gather(X)` executes all queued operations required to calculate unevaluated tall array `X` and collects the results into memory as `Y`.

MATLAB can run out of memory if the result of the `gather` calculation is too large. If you are unsure whether the result can fit in memory, use `gather(head(X))` or `gather(tail(X))` to perform the full calculation, but bring only a small portion of the result into memory.

Use `gather` sparingly to ensure that extra passes through the data are combined during the calculations whenever possible. For more information, see "Deferred Evaluation of Tall Arrays".

`[Y1,Y2,Y3,...] = gather(X1,X2,X3,...)` gathers multiple unevaluated tall arrays `X1, X2, X3,...` into the corresponding outputs `Y1, Y2, Y3,...`.

Examples

Evaluate Deferred Tall Array Calculation

Create a datastore for the `airlinesmall.csv` data set. Select a subset of variables to work with, and treat `'NA'` values as missing data so that `datastore` replaces them with `NaN` values. Convert the datastore into a tall table.

```
varnames = {'Year','ArrDelay','UniqueCarrier'};
ds = datastore('airlinesmall.csv', 'TreatAsMissing', 'NA',...
```

```
    'SelectedVariableNames',varnames);
T = tall(ds)
```

```
T =

  M×3 tall table

    Year    ArrDelay    UniqueCarrier
    ____    ________    _____________

    1987     8          'PS'
    1987     8          'PS'
    1987    21          'PS'
    1987    13          'PS'
    1987     4          'PS'
    1987    59          'PS'
    1987     3          'PS'
    1987    11          'PS'
    :       :           :
    :       :           :
```

Calculate the size of the tall table.

```
sz = size(T)
```

```
sz =

  1×2 tall double row vector

    ?    ?
```

MATLAB® does not immediately evaluate most operations on tall arrays. Instead, MATLAB remembers the operations you perform as you enter them and optimizes the calculations in the background.

When you use `gather` on an unevaluated tall array, MATLAB executes all of the queued operations using the minimum number of passes through the data. This optimization greatly reduces the execution time of large calculations. For this reason, you should use `gather` only when you need to see a result.

Use `gather` to execute the calculation and collect the result into memory.

```
S = gather(sz)
```

```
Evaluating tall expression using the Local MATLAB Session:
```

```
- Pass 1 of 1: Completed in 0 sec

Evaluation completed in 0 sec

S =

      123523           3
```

Evaluate Multiple Tall Arrays

Use `gather` with several inputs to simultaneously evaluate several tall arrays.

Create a tall array from an in-memory array of random integers between 1 and 1000. Calculate the maximum and minimum values in each column.

```
A = tall(randi(1000,100,7))
```

```
A =

  100×7 tall double matrix

   815   163   645    60   423   583   851
   906   795   379   682    95   541   561
   127   312   812    43   599   870   930
   914   529   533    72   471   265   697
   633   166   351   522   696   319   583
    98   602   940    97   700   120   816
   279   263   876   819   639   940   880
   547   655   551   818    34   646   989
   :     :     :     :      :     :     :
   :     :     :     :      :     :     :
```

```
b = min(A);
c = max(A);
```

Use the results to determine the overall minimum and maximum values in the array. Collect the final result into memory.

```
[mnA,mxA] = gather(min(b),max(c));
```

```
Evaluating tall expression using the Local MATLAB Session:
```

```
Evaluation completed in 0 sec
```

```
valRange = [mnA mxA]
```

```
valRange =

           1        1000
```

Input Arguments

X — Unevaluated tall array

tall array

Unevaluated tall array. An unevaluated tall array is any tall array on which you perform calculations without using `gather` to fully evaluate those calculations.

Output Arguments

Y — In-memory array

array

In-memory array. The data type of `Y` is the same as the underlying data type of the unevaluated tall array `X`.

Tips

- If you have Parallel Computing Toolbox, see `gather` for information about gathering `distributed` and `gpuArray` computations.

See Also

See Also

`head` | `tail` | `tall` | `topkrows`

Topics

"Tall Arrays"
"Deferred Evaluation of Tall Arrays"
"Functions That Support Tall Arrays (A–Z)"

Introduced in R2016b

gca

Current axes or chart

Syntax

```
ax = gca
```

Description

`ax = gca` returns the current axes or chart for the current figure, which is typically the last one created or clicked with the mouse. Graphics functions, such as `title`, target the current axes or chart. Use `ax` to access and modify properties of the axes or chart. If axes or charts do not exist, then `gca` creates Cartesian axes.

Examples

Specify Properties for Current Axes

Plot a sine wave.

```
x = linspace(0,10);
y = sin(4*x);
plot(x,y)
```

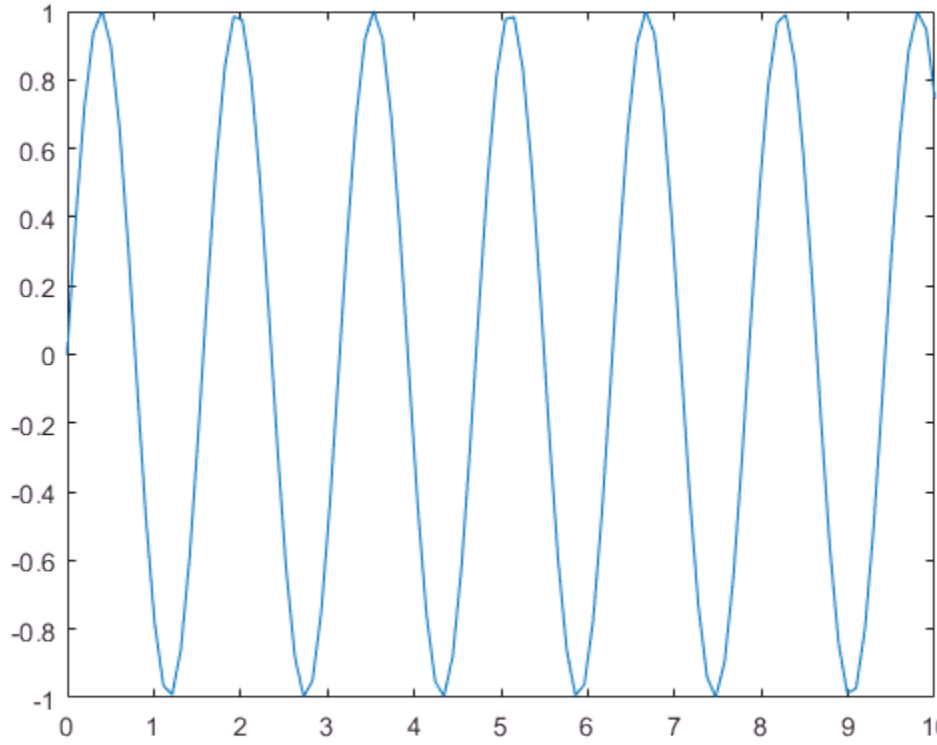

Set the font size, tick direction, tick length, and *y*-axis limits for the current axes. Use `gca` to refer to the current axes.

Note: Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead, such as `set(ax,'FontSize',12)`.

```
ax = gca; % current axes
ax.FontSize = 12;
ax.TickDir = 'out';
ax.TickLength = [0.02 0.02];
ax.YLim = [-2 2];
```

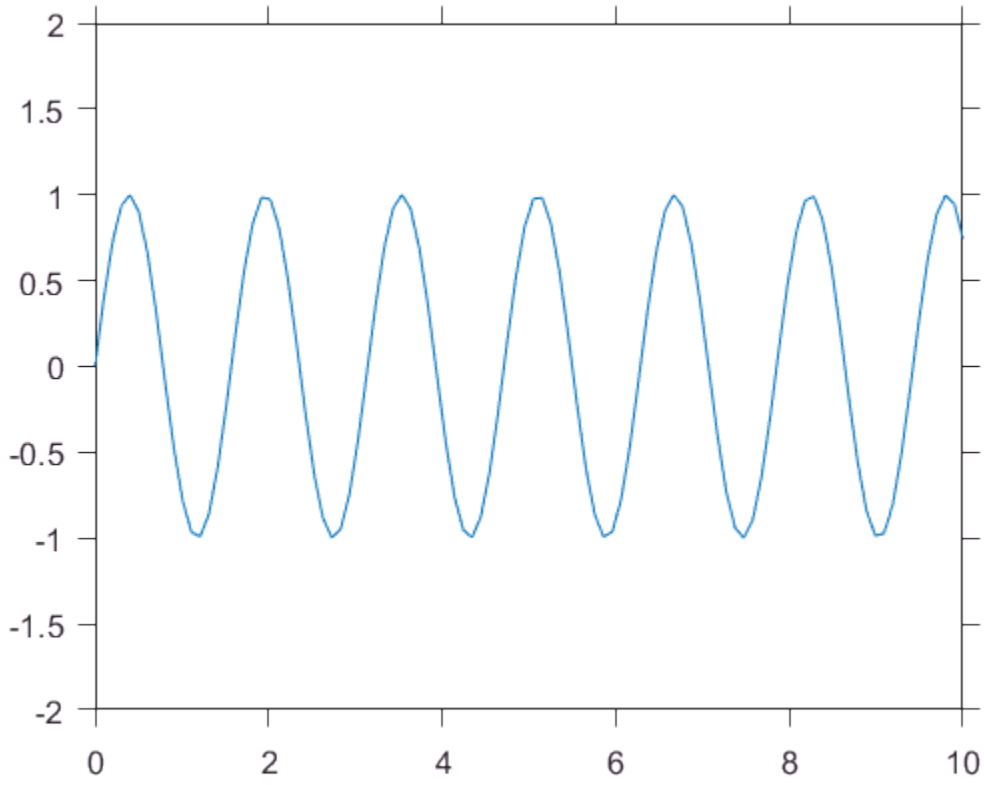

Output Arguments

ax — Current axes or chart

`Axes` object | `PolarAxes` object | graphics object

Current axes or chart, returned as an `Axes` object, a `PolarAxes` object, or a graphics object whose parent is a `Figure`, `Tab`, or `Panel` object, instead of an `Axes` object.

For example, a `HeatmapChart` object can be the current chart since the parent is typically a `Figure` object. A `Stem` object cannot be the current chart since the parent is an `Axes` object.

Tips

- User interaction can change the current axes or chart. It is better to assign the axes or chart to a variable when you create it instead of relying on `gca`.
- Changing the current figure also changes the current axes or chart.
- Set axes properties after plotting since some plotting functions reset axes properties.
- To access the current axes or chart without forcing the creation of Cartesian axes, query the figure CurrentAxes property. MATLAB returns an empty array if there is no current axes.

  ```
  fig = gcf;
  ax = fig.CurrentAxes;
  ```

  Starting in R2014b, you can query properties using dot notation. If you are using an earlier release, use the `get` function instead, such as `ax = get(fig,'CurrentAxes')`.

See Also

See Also

Functions
`axes` | `cla` | `findobj` | `gcf` | `get` | `set`

Properties
Axes Properties | Polar Axes Properties

Introduced before R2006a

gcbf

Handle of figure containing object whose callback is executing

Syntax

```
fig = gcbf
```

Description

`fig = gcbf` returns the handle of the figure that contains the object whose callback is currently executing. This object can be the figure itself, in which case, `gcbf` returns the figure's handle.

When no callback is executing, `gcbf` returns the empty matrix, `[]`.

The value returned by `gcbf` is identical to the `figure` output argument returned by `gcbo`.

See Also

`gcbo` | `gco` | `gcf` | `gca`

Introduced before R2006a

gcbo

Handle of object whose callback is executing

Syntax

```
h = gcbo
[h,figure] = gcbo
```

Description

`h = gcbo` returns the handle of the graphics object whose callback is executing.

`[h,figure] = gcbo` returns the handle of the current callback object and the handle of the figure containing this object.

Tips

The MATLAB software stores the handle of the object whose callback is executing in the root `CallbackObject` property. If a callback interrupts another callback, MATLAB replaces the `CallbackObject` value with the handle of the object whose callback is interrupting. When that callback completes, MATLAB restores the handle of the object whose callback was interrupted.

The root `CallbackObject` property is read only, so its value is always valid at any time during callback execution. The root CurrentFigure property, and the figure CurrentAxes and CurrentObject properties (returned by `gcf`, `gca`, and `gco`, respectively) are user settable, so they can change during the execution of a callback, especially if that callback is interrupted by another callback. Therefore, those functions are not reliable indicators of which object's callback is executing.

When you write callback routines for the `CreateFcn` and `DeleteFcn` of any object and the figure SizeChangedFcn, you must use `gcbo` since those callbacks do not update the root's CurrentFigure property, or the figure's CurrentObject or CurrentAxes properties; they only update the root's CallbackObject property.

When no callbacks are executing, `gcbo` returns `[]` (an empty matrix).

See Also

`gca` | `gcf` | `gco` | `groot`

Introduced before R2006a

gcd

Greatest common divisor

Syntax

```
G = gcd(A,B)
[G,U,V] = gcd(A,B)
```

Description

`G = gcd(A,B)` returns the greatest common divisors of the elements of `A` and `B`. The elements in `G` are always nonnegative, and `gcd(0,0)` returns `0`. This syntax supports inputs of any numeric type.

`[G,U,V] = gcd(A,B)` also returns the Bézout coefficients, `U` and `V`, which satisfy: `A.*U + B.*V = G`. The Bézout coefficients are useful for solving Diophantine equations. This syntax supports double, single, and signed integer inputs.

Examples

Greatest Common Divisors of Double Values

```
A = [-5 17; 10 0];
B = [-15 3; 100 0];
G = gcd(A,B)
```

```
G =

     5     1
    10     0
```

`gcd` returns positive values, even when the inputs are negative.

Greatest Common Divisors of Unsigned Integers

```
A = uint16([255 511 15]);
```

```
B = uint16([15 127 1023]);
G = gcd(A,B)
```

```
G = 1×3 uint16 row vector

   15    1    3
```

Solution to Diophantine Equation

Solve the Diophantine equation, $30x + 56y = 8$ for x and y.

Find the greatest common divisor and a pair of Bézout coefficients for 30 and 56.

```
[g,u,v] = gcd(30,56)
```

```
g = 2

u = -13

v = 7
```

u and v satisfy the Bézout's identity, `(30*u) + (56*v) = g`.

Rewrite Bézout's identity so that it looks more like the original equation. Do this by multiplying by 4. Use == to verify that both sides of the equation are equal.

```
(30*u*4) + (56*v*4) == g*4
```

```
ans = logical
   1
```

Calculate the values of x and y that solve the problem.

```
x = u*4
```

```
x = -52
```

```
y = v*4
```

```
y = 28
```

Input Arguments

A,B — Input values

scalars, vectors, or arrays of real integer values

Input values, specified as scalars, vectors, or arrays of real integer values. A and B can be any numeric type, and they can be of different types within certain limitations:

- If A or B is of type `single`, then the other can be of type `single` or `double`.
- If A or B belongs to an integer class, then the other must belong to the same class or it must be a `double` scalar value.

A and B must be the same size or one must be a scalar.

Example: `[20 -3 13],[10 6 7]`

Example: `int16([100 -30 200]),int16([20 15 9])`

Example: `int16([100 -30 200]),20`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

G — Greatest common divisor

real, nonnegative integer values

Greatest common divisor, returned as an array of real nonnegative integer values. G is the same size as A and B, and the values in G are always real and nonnegative. G is returned as the same type as A and B. If A and B are of different types, then G is returned as the nondouble type.

U,V — Bézout coefficients

real integer values

Bézout coefficients, returned as arrays of real integer values that satisfy the equation, `A.*U + B.*V = G`. The data type of U and V is the same type as that of A and B. If A and B are of different types, then U and V are returned as the nondouble type.

Algorithms

`g = gcd(A,B)` is calculated using the Euclidian algorithm.[1]

`[g,u,v] = gcd(A,B)` is calculated using the extended Euclidian algorithm.[1]

References

[1] Knuth, D. "Algorithms A and X." *The Art of Computer Programming, Vol. 2*, Section 4.5.2. Reading, MA: Addison-Wesley, 1973.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`lcm`

Introduced before R2006a

gcf

Current figure handle

Syntax

```
fig = gcf
```

Description

`fig = gcf` returns the current figure handle. If a figure does not exist, then `gcf` creates a figure and returns its handle. You can use the figure handle to query and modify figure properties. For more information, see Figure Properties.

Examples

Specify Properties for Current Figure

Set the background color and remove the toolbar for the current figure. Use the `gcf` command to get the current figure handle.

```
surf(peaks)
fig = gcf; % current figure handle
fig.Color = [0 0.5 0.5];
fig.ToolBar = 'none';
```

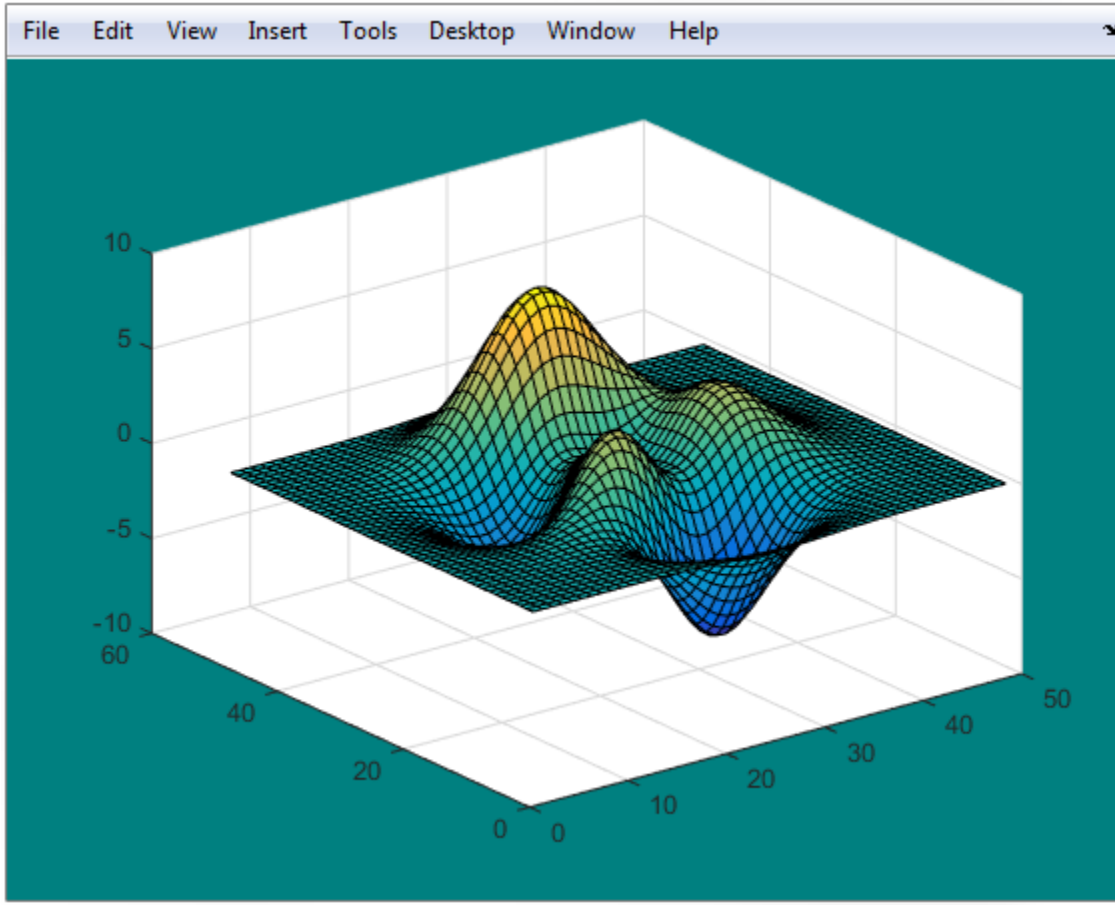

Definitions

Current Figure

The current figure is the target for graphics output. It is the figure window in which graphics commands such as `plot`, `title`, and `surf` draw their results. It is typically the last figure created or the last figure clicked with the mouse.

User interaction can change the current figure. If you need to access a specific figure, store the figure handle in your program code when you create the figure and use this handle instead of `gcf`.

Tips

- To get the handle of the current figure without forcing the creation of a figure if one does not exist, query the `CurrentFigure` property on the root object.

  ```
  fig = get(groot,'CurrentFigure');
  ```
  MATLAB returns `fig` as an empty array if there is no current figure.

See Also

See Also

`clf` | Figure Properties | `figure` | `gca` | `get` | `set`

Introduced before R2006a

gcmr

Get current mapreducer configuration

Syntax

```
mr = gcmr
mr = gcmr('nocreate')
```

Description

`mr = gcmr` returns an object representing the current global execution environment for `mapreduce`.

- If no global execution environment exists, then `gcmr` calls `mapreducer` to set the global execution environment to be the default.
- If a global execution environment currently exists, then `gcmr` returns the last visible MapReducer object created.

  When you create a MapReducer object using `mapreducer`, the object sets the global execution environment. The global execution environment persists even if the object representing it is later deleted.
- If the global execution environment is deleted or invalid, then `gcmr` returns the next visible MapReducer object available. For example, `delete(gcmr)` deletes the current global execution environment.

The `gcmr` function defines the global execution environment for `mapreduce`, and is most likely used with Parallel Computing Toolbox, MATLAB Distributed Computing Server™, or MATLAB Compiler™.

If you do not specify a configuration to use in your call to `mapreduce`, then by default `mapreduce` uses the configuration returned (or generated) by `gcmr`.

`mr = gcmr('nocreate')` returns the current global execution environment for `mapreduce`, if one already exists. If no global execution environment exists, then `gcmr` returns `[]`.

Tips

- If you have Parallel Computing Toolbox, see the `mapreducer` function reference page for related information.
- If you have MATLAB Compiler, see the `mapreducer` function reference page for related information.

See Also

See Also

`mapreduce` | `mapreducer`

Topics

"Speed Up and Deploy MapReduce Using Other Products"

Introduced in R2014b

gco

Handle of current object

Syntax

```
h = gco
h = gco(figure_handle)
```

Description

`h = gco` returns the handle of the current object.

`h = gco(figure_handle)` returns the handle of the current object in the figure specified by `figure_handle`.

Tips

The current object is the last object clicked or selected via keyboard interaction, excluding `uimenu`s. If the mouse click did not occur over a figure child object, the figure becomes the current object. The MATLAB software stores the handle of the current object in the figure's `CurrentObject` property.

An object can become the current object as a result of pressing the space bar to invoke a callback in a dialog when a uicontrol in that dialog has focus (usually the result of using the **Tab** key to change focus).

The `CurrentObject` of the CurrentFigure does not always indicate the object whose callback is being executed. Interruptions of callbacks by other callbacks can change the `CurrentObject` or even the `CurrentFigure`. Some callbacks, such as `CreateFcn` and `DeleteFcn`, and uimenu `Callback`, intentionally do not update `CurrentFigure` or `CurrentObject`.

`gcbo` provides the only completely reliable way to retrieve the handle to the object whose callback is executing, at any point in the `callback` function, regardless of the type of callback or of any previous interruptions.

See Also

`gca` | `gcbo` | `gcf`

Introduced before R2006a

ge, >=

Determine greater than or equal to

Syntax

```
A >= B
ge(A,B)
```

Description

`A >= B` returns a logical array with elements set to logical 1 (`true`) where `A` is greater than or equal to `B`; otherwise, the element is logical `0` (`false`). The test compares only the real part of numeric arrays. `ge` returns logical `0` (`false`) where `A` or `B` have NaN or undefined categorical elements.

`ge(A,B)` is an alternate way to execute `A >= B`, but is rarely used. It enables operator overloading for classes.

Examples

Test Vector Elements

Find which vector elements are greater than or equal to a given value.

Create a numeric vector.

```
A = [1 12 18 7 9 11 2 15];
```

Test the vector for elements that are greater than or equal to `11`.

```
A >= 11
```

```
ans = 1×8 logical array
   0   1   1   0   0   1   0   1
```

The result is a vector with values of logical `1` (`true`) where the elements of `A` satisfy the expression.

Use the vector of logical values as an index to view the values in A that are greater than or equal to 11.

```
A(A >= 11)
```

```
ans =

    12    18    11    15
```

The result is a subset of the elements in A.

Replace Elements of Matrix

Create a matrix.

```
A = magic(4)
```

```
A =

    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1
```

Replace all values greater than or equal to 9 with the value 10.

```
A(A >= 9) = 10
```

```
A =

    10     2     3    10
     5    10    10     8
    10     7     6    10
     4    10    10     1
```

The result is a new matrix whose largest element is 10.

Compare Values in Categorical Array

Create an ordinal categorical array.

```
A = categorical({'large' 'medium' 'small'; 'medium' ...
'small' 'large'},{'small' 'medium' 'large'},'Ordinal',1)
```

```
A = 2×3 categorical array
     large       medium      small
     medium      small       large
```

The array has three categories: `'small'`, `'medium'`, and `'large'`.

Find all values greater than or equal to the category `'medium'`.

```
A >= 'medium'
```

```
ans = 2×3 logical array
   1   1   0
   1   0   1
```

A value of logical `1` (`true`) indicates a value greater than or equal to the category `'medium'`.

Compare the rows of `A`.

```
A(1,:) >= A(2,:)
```

```
ans = 1×3 logical array
   1   1   0
```

The function returns logical `1` (`true`) where the first row has a category value greater than or equal to the second row.

Test Complex Numbers

Create a vector of complex numbers.

```
A = [1+i 2-2i 1+3i 1-2i 5-i];
```

Find the values that are greater than or equal to `2`.

```
A(A >= 2)
```

```
ans =
```

```
   2.0000 - 2.0000i   5.0000 - 1.0000i
```

`ge` compares only the real part of the elements in `A`.

Use `abs` to find which elements are outside a radius of `2` from the origin.

```
A(abs(A) >= 2)
```

```
ans =
   2.0000 - 2.0000i   1.0000 + 3.0000i   1.0000 - 2.0000i   5.0000 - 1.0000i
```

The result has more elements since `abs` accounts for the imaginary part of the numbers.

Test Duration Values

Create a `duration` array.

```
d = hours(21:25) + minutes(75)
```

```
d = 1×5 duration array
   22.25 hr   23.25 hr   24.25 hr   25.25 hr   26.25 hr
```

Test the array for elements that are greater than or equal to one standard day.

```
d >= 1
```

```
ans = 1×5 logical array
   0   0   1   1   1
```

Input Arguments

A — Left array

scalar | vector | matrix | multidimensional array

Left array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs `A` and `B` must either be the same size or have sizes that are compatible

(for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is an ordinal categorical array, the other input can be an ordinal categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have the same sets of categories, including their order. See "Compare Categorical Array Elements" for more details.
- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.
- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

B — Right array

scalar | vector | matrix | multidimensional array

Right array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is an ordinal categorical array, the other input can be an ordinal categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have

the same sets of categories, including their order. See "Compare Categorical Array Elements" for more details.

- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.
- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

Tips

- Some floating-point numbers cannot be represented exactly in binary form. This leads to small differences in results that the >= operator reflects. For more information, see "Avoiding Common Problems with Floating-Point Arithmetic".

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`eq` | `gt` | `le` | `lt` | `ne`

Topics

"Array Comparison with Relational Operators"
"Ordinal Categorical Arrays"
"MATLAB Operators and Special Characters"

Introduced before R2006a

genpath

Generate path name

Syntax

```
p = genpath
p = genpath(folderName)
```

Description

`p = genpath` returns a path name, `p`, that includes all the folders and subfolders below *`matlabroot`*`/toolbox`, including empty subfolders.

`p = genpath(folderName)` returns a path name that includes `folderName` and multiple levels of subfolders below `folderName`. The path name does not include folders named `private`, folders that begin with the `@` character (class folders), folders that begin with the `+` character (package folders), or subfolders within any of these.

Examples

Add Folder and Subfolders to Search Path

Use `genpath` in conjunction with `addpath` to add a folder and its subfolders to the search path.

Create a folder `myfolder` containing a subfolder `mysubfolder`.

```
mkdir myfolder;
cd myfolder;
mkdir mysubfolder;
cd ..
```

Generate a path that includes `myfolder` and all folders below it.

```
p = genpath('myfolder')
```

```
p =
```

```
'myfolder;myfolder\mysubfolder;'
```

Add the folder and its subfolders to the search path.

```
addpath(p)
```

Input Arguments

`folderName` — Folder name

character vector

Folder name, specified as a character vector.

Example: `'c:/matlab/myfiles'`

See Also

See Also

`addpath` | `path` | `rmpath`

Topics

"What Is the MATLAB Search Path?"

Introduced before R2006a

genvarname

Construct valid variable name from string

Note: `genvarname` will be removed in a future release. Use `matlab.lang.makeValidName` and `matlab.lang.makeUniqueStrings` instead.

Syntax

```
varname = genvarname(str)
varname = genvarname(str, exclusions)
```

Description

`varname = genvarname(str)` constructs a string or character vector `varname` that is similar to or the same as the `str` input, and can be used as a valid variable name. `str` can be a string, a string array, a character array, a cell array of character vectors. If `str` is a string array or cell array of character vectors, `genvarname` returns a string array or cell array of character vectors in `varname`. The elements returned by `genvarname` are guaranteed to be different from each other.

`varname = genvarname(str, exclusions)` returns a valid variable name that is different from any name listed in the `exclusions` input. The `exclusions` input can be a string, a string array, a character array, a cell array of character vectors. Specify the function `who` in `exclusions` to create a variable name that will be unique in the current MATLAB workspace (see "Example 4" on page 1-3748, below).

Note `genvarname` does not create a variable in the MATLAB workspace. You cannot, therefore, assign a value to the output of `genvarname`.

Examples

Example 1

Create four similar variable names that do not conflict with each other:

```
v = genvarname({'A', 'A', 'A', 'A'})
v =
    'A'    'A1'    'A2'    'A3'
```

Example 2

Read a column header `hdr` from worksheet `trial2` in Excel spreadsheet myproj_apr23:

```
[data hdr] = xlsread('myproj_apr23.xls', 'trial2');
```

Make a variable name from the text of the column header that will not conflict with other names:

```
v = genvarname(['Column ' hdr{1,3}]);
```

Assign data taken from the spreadsheet to the variable in the MATLAB workspace:

```
eval([v '= data(1:7, 3);']);
```

Example 3

Collect readings from an instrument once every minute over the period of an hour into different fields of a structure. Simulate instrument readings using a random number. `genvarname` not only generates unique fieldnames, but also creates the structure and fields in the MATLAB workspace:

```
for k = 1:60
record.(genvarname(['reading' datestr(clock, 'HHMMSS')])) = rand(1);
pause(60)
end
```

After the program ends, display the recorded data from the workspace:

```
record
```

```
record =

    reading092610: 0.6541
    reading092710: 0.6892
    reading092811: 0.7482
    reading092911: 0.4505
    reading093011: 0.0838
         .
         .
         .
```

Example 4

Generate variable names that are unique in the MATLAB workspace by putting the output from the `who` function in the `exclusions` list.

```
for k = 1:5
   t = clock;
   pause(uint8(rand * 10));
   v = genvarname('time_elapsed', who);
   eval([v ' = etime(clock,t)'])
   end
```

As this code runs, you can see that the variables created by `genvarname` are unique in the workspace:

```
time_elapsed =
    5.0070
time_elapsed1 =
    2.0030
time_elapsed2 =
    7.0010
time_elapsed3 =
    8.0010
time_elapsed4 =
    3.0040
```

After the program completes, use the `who` function to view the workspace variables:

```
who

k           time_elapsed   time_elapsed2  time_elapsed4
```

```
t           time_elapsed1  time_elapsed3  v
```

Example 5

If you try to make a variable name from a MATLAB keyword, `genvarname` creates a variable name that capitalizes the keyword and precedes it with the letter `x`:

```
v = genvarname('global')
v =
   xGlobal
```

Example 6

If you enter a character vector that is longer than the value returned by the `namelengthmax` function, `genvarname` truncates the resulting variable name character vector:

```
namelengthmax
ans =
    63

vstr = genvarname(sprintf('%s%s', ...
   'This name truncates because it contains ', ...
   'more than the maximum number of characters'))
vstr =
ThisNameTruncatesBecauseItContainsMoreThanTheMaximumNumberOfCha
```

Tips

A valid MATLAB variable name is a character vector of letters, digits, and underscores, such that the first character is a letter, and the length of the vector is less than or equal to the value returned by the `namelengthmax` function. Any character vector that exceeds `namelengthmax` is truncated in the `varname` output. See “Example 6” on page 1-3749, below.

The variable name returned by `genvarname` is not guaranteed to be different from other variable names currently in the MATLAB workspace unless you use the `exclusions` input in the manner shown in “Example 4” on page 1-3748, below.

If you use `genvarname` to generate a field name for a structure, MATLAB does create a variable for the structure and field in the MATLAB workspace. See “Example 3” on page 1-3747, below.

If the `str` input contains any whitespace characters, `genvarname` removes then and capitalizes the next alphabetic character in `str`. If `str` contains any nonalphanumeric characters, `genvarname` translates these characters into their hexadecimal value.

See Also

`isvarname` | `iskeyword` | `isletter` | `namelengthmax` | `who` | `regexp`

Introduced before R2006a

get

Query graphics object properties

Syntax

```
v = get(h)
v = get(h,propertyName)
v = get(h,propertyArray)
v = get(h,'default')
v = get(h,defaultTypeProperty)
v = get(groot,'factory')
v = get(groot,factoryTypeProperty)
```

Description

Note: Do not use the `get` function on Java objects as it will cause a memory leak. For more information, see "Access Public and Private Data".

`v = get(h)` returns all properties and property values for the graphics object identified by `h`. `v` is a structure whose field names are the property names and whose values are the corresponding property values. `h` can be a single object or an `m`-by-`n` array of objects. If `h` is a single object and you do not specify an output argument, then MATLAB displays the information on the screen.

`v = get(h,propertyName)` returns the value for the specific property, `propertyName`. Use single quotes around the property name, for example, `get(h,'Color')`. If you do not specify an output argument, then MATLAB displays the information on the screen.

`v = get(h,propertyArray)` returns an *m*-by-*n* cell array, where *m* is equal to `length(h)` and *n* is equal to the number of property names contained in `propertyArray`.

`v = get(h,'default')` returns all default values currently defined on object `h` in a structure array. The field names are the object property names and the field values are

the corresponding property values. If you do not specify an output argument, MATLAB displays the information on the screen.

`v = get(h,defaultTypeProperty)` returns the current default value for a specific property. The argument `defaultTypeProperty` is the word `default` concatenated with the object type (e.g., `Figure`) and the property name (e.g., `Color`) in single quotes. For example, `get(groot,'defaultFigureColor')`.

`v = get(groot,'factory')` returns the factory-defined values of all user-settable properties in a structure array. The field names are the object property names and the field values are the corresponding property values. If you do not specify an output argument, MATLAB displays the information on the screen.

`v = get(groot,factoryTypeProperty)` returns the factory-defined value for a specific property. The argument `factoryTypeProperty` is the word `factory` concatenated with the object type (e.g., `Figure`) and the property name (e.g., `Color`) in single quotes. For example, `get(groot,'factoryFigureColor')`.

Examples

List All Property Values for Specific Object

Create a line plot and return the chart line object as `p`. List all the properties of the line and the current property values.

```
p = plot(1:10);
get(p)
```

```
    AlignVertexCenters: 'off'
            Annotation: [1x1 matlab.graphics.eventdata.Annotation]
          BeingDeleted: 'off'
            BusyAction: 'queue'
         ButtonDownFcn: ''
              Children: []
              Clipping: 'on'
                 Color: [0.9290 0.6940 0.1250]
             CreateFcn: ''
             DeleteFcn: ''
           DisplayName: ''
      HandleVisibility: 'on'
               HitTest: 'on'
```

```
         Interruptible: 'on'
             LineStyle: '-'
             LineWidth: 0.5000
                Marker: 'none'
       MarkerEdgeColor: 'auto'
       MarkerFaceColor: 'none'
            MarkerSize: 6
                Parent: [1x1 Axes]
         PickableParts: 'visible'
              Selected: 'off'
    SelectionHighlight: 'on'
                   Tag: ''
                  Type: 'line'
         UIContextMenu: []
              UserData: []
               Visible: 'on'
                 XData: [1 2 3 4 5 6 7 8 9 10]
             XDataMode: 'auto'
           XDataSource: ''
                 YData: [1 2 3 4 5 6 7 8 9 10]
           YDataSource: ''
                 ZData: [1x0 double]
           ZDataSource: ''
```

Query Specific Property of Specific Object

Create a line plot and return the chart line object as `p`. Use `get` to return the current value of the `LineWidth` property.

```
p = plot(1:10);
get(p,'LineWidth')
```

```
ans =

    0.5000
```

Query Set of Properties for Specific Object

Create a line plot with circle markers and return the chart line object as `p`. Use `get` to return the current values of the `LineWidth`, `Marker`, and `MarkerSize` properties for the object.

```
p = plot(1:10,'ro-');
```

```
props = {'LineWidth','Marker','MarkerSize'};
get(p,props)
```

```
ans =

    [0.5000]    'o'    [6]
```

Query Default Property Value on Root

Return the default value of the `LineWidth` property defined on the root for all line graphics objects.

```
get(groot,'DefaultLineLineWidth')
```

```
ans =

    0.5000
```

See Also

See Also

`findobj` | `gca` | `gcf` | `gco` | `set`

Topics

"Graphics Object Properties"

Introduced before R2006a

get

Query property values for `audioplayer` object

Syntax

```
Value = get(obj,Name)
Values = get(obj,{Name1,...,NameN})
Values = get(obj)
get(obj)
```

Description

`Value = get(obj,Name)` returns the value of the specified property for object *`obj`*.

`Values = get(obj,{Name1,...,NameN})` returns the values of the specified properties in a 1-by-*N* cell array.

`Values = get(obj)` returns a scalar structure that contains the values of all properties of *`obj`*. Each field name corresponds to a property name.

`get(obj)` displays all property names and their current values.

Examples

Create an `audioplayer` object from the example file `handel.mat` and query the object properties:

```
load handel.mat;
handelObj = audioplayer(y, Fs);

% Display all properties.
get(handelObj)

% Display only the SampleRate property.
get(handelObj, 'SampleRate')
```

```
% Create a cell array that contains
% values for two properties.
info = get(handelObj, {'BitsPerSample', 'NumberOfChannels'});
```

Alternatives

To access a single property, you can use dot notation. Reference each property as though it is a field of a structure array. For example, find the value of the `TotalSamples` property for an object named `handelObj` (as created in the Example):

```
numSamples = handelObj.TotalSamples;
```

This command is exactly equivalent to:

```
numSamples = get(handelObj, 'TotalSamples');
```

See Also

`audioplayer` | set

get

Query property values for `audiorecorder` object

Syntax

```
Value = get(obj,Name)
Values = get(obj,{Name1,...,NameN})
Values = get(obj)
get(obj)
```

Description

`Value = get(obj,Name)` returns the value of the specified property for object *`obj`*.

`Values = get(obj,{Name1,...,NameN})` returns the values of the specified properties in a 1-by-*N* cell array.

`Values = get(obj)` returns a scalar structure that contains the values of all properties of *`obj`*. Each field name corresponds to a property name.

`get(obj)` displays all property names and their current values.

Examples

Create an `audiorecorder` object and query the object properties:

```
recorderObj = audiorecorder;

% Display all properties.
get(recorderObj)

% Display only the SampleRate property.
get(recorderObj, 'SampleRate')

% Create a cell array that contains
% values for two properties.
```

```
info = get(recorderObj, {'BitsPerSample', 'NumberOfChannels'});
```

Alternatives

To access a single property, you can use dot notation. Reference each property as though it is a field of a structure array. For example, find the value of the `TotalSamples` property for an object named `recorderObj` (as created in the Example):

```
numSamples = recorderObj.TotalSamples;
```

This command is exactly equivalent to:

```
numSamples = get(recorderObj, 'TotalSamples');
```

See Also

`audiorecorder` | set

get (COM)

Get property value from interface, or display properties

Syntax

```
V = get(h)
V = get(h,'name')
```

Description

`V = get(h)` returns a list of all properties and their values for the object or interface `h`.

If `V` is empty, either there are no properties in the object, or MATLAB cannot read the object type library. Refer to the COM vendors documentation.

`V = get(h,'name')` returns value of property specified by `name`.

COM functions are available on Microsoft Windows systems only.

Examples

Create a COM server running Microsoft Excel software:

```
e = actxserver('Excel.Application');
```

Retrieve a single property value.

```
e.Path
```

```
ans =
   C:\Program Files\MSOffice\OFFICE11
```

MATLAB displays the path to your program.

List of all properties for the `CommandBars` interface.

```
c = CommandBars.get(e)
```

MATLAB displays information for your version of Excel.

Tips

The meaning and type of the return value is dependent upon the specific property being retrieved. The object documentation describes the specific meaning of the return value. MATLAB might convert the data type of the return value. For a description of how MATLAB converts COM data types, see “Handle COM Data in MATLAB”.

See Also

`set (COM)` | `inspect` | `isprop` | `addproperty` | `deleteproperty`

Introduced before R2006a

get (RandStream)

Random stream properties

Class

`@RandStream`

Syntax

```
get(s)
P = get(s)
P = get(s,'PropertyName')
```

Description

`get(s)` prints the list of properties for the random stream `s`.

`P = get(s)` returns all properties of `s` in a scalar structure.

`P = get(s,'PropertyName')` returns the property `'PropertyName'`.

See Also

`RandStream` | `set (RandStream)`

get (serial)

Serial port object properties

Syntax

```
get(obj)
out = get(obj)
out = get(obj,'PropertyName')
```

Description

`get(obj)` returns all property names and their current values to the command line for the serial port object, `obj`.

`out = get(obj)` returns the structure `out` where each field name is the name of a property of `obj`, and each field contains the value of that property.

`out = get(obj,'PropertyName')` returns the value `out` of the property specified by *`PropertyName`* for `obj`. If *`PropertyName`* is replaced by a 1-by-n or n-by-1 cell array of strings containing property names, then `get` returns a 1-by-n cell array of values to `out`. If `obj` is an array of serial port objects, then `out` will be a m-by-n cell array of property values where m is equal to the length of `obj` and n is equal to the number of properties specified.

Examples

This example illustrates some of the ways you can use `get` to return property values for the serial port object `s` on a Windows platform.

```
s = serial('COM1');
out1 = get(s);
out2 = get(s,{'BaudRate','DataBits'});
s.Parity
```

```
ans =
none
```

Tips

Refer to Displaying Property Names and Property Values for a list of serial port object properties that you can return with `get`.

When you specify a property name, you can do so without regard to case. For example, if `s` is a serial port object, then these commands are equivalent.

```
out = s.BaudRate;
out = s.baudrate;
```

See Also

`set`

Introduced before R2006a

get (tscollection)

Query `tscollection` object property values

Syntax

```
value = get(tsc,'PropertyName')
```

Description

`value = get(tsc,'PropertyName')` returns the value of the specified property of the `tscollection` object tsc. The following syntax is equivalent:

```
value = tsc.PropertyName
```

`get(tsc)` displays all properties and values of the `tscollection` object tsc.

See Also

`set (tscollection)` | timeseries

Introduced before R2006a

getabstime (tscollection)

Extract date-string time vector into cell array

Syntax

```
getabstime(tsc)
```

Description

`getabstime(tsc)` extracts the time vector from the `tscollection` object tsc as a cell array of date strings. To define the time vector relative to a calendar date, set the `TimeInfo.StartDate` property of the time-series collection. When the `TimeInfo.StartDate` format is a valid `datestr` format, the output strings from `getabstime` have the same format.

Examples

1. Create a `tscollection` object.

   ```
   tsc = tscollection(timeseries([3 6 8 0 10]));
   ```

2. Set the `StartDate` property.

   ```
   tsc.TimeInfo.StartDate = '10/27/2005 07:05:36';
   ```

3. Extract a vector of absolute time values.

   ```
   getabstime(tsc)

   ans =

       '27-Oct-2005 07:05:36'
       '27-Oct-2005 07:05:37'
       '27-Oct-2005 07:05:38'
       '27-Oct-2005 07:05:39'
       '27-Oct-2005 07:05:40'
   ```

4. Change the date-string format of the time vector.

```
tsc.TimeInfo.Format = 'mm/dd/yy';
```

5 Extract the time vector with the new date-string format.

```
getabstime(tsc)

ans =

    '10/27/05'
    '10/27/05'
    '10/27/05'
    '10/27/05'
    '10/27/05'
```

See Also

datestr | setabstime (tscollection) | tscollection

Introduced before R2006a

getappdata

Retrieve application-defined data

Use this function to retrieve data stored using the `setappdata` function. Both of these functions provide a convenient way to share data between callbacks or between separate UIs.

Syntax

```
val = getappdata(obj,name)
vals = getappdata(obj)
```

Description

`val = getappdata(obj,name)` returns a value stored in the graphics object, `obj`. The name identifier, `name`, uniquely identifies the value to retrieve.

`vals = getappdata(obj)` returns all values stored in the graphics object with their name identifiers.

Examples

Store and Retrieve Date and Time

Create a figure window.

```
f = figure;
```

Get the current date and time as separate variables.

```
dt = fix(clock);
currdate = dt(1:3);
currtime = dt(4:6);
```

Store `currdate` and `currtime` using the `setappdata` function.

```
setappdata(f,'todaysdate',currdate);
```

```
setappdata(f,'presenttime',currtime);
```

Retrieve the date information.

```
getappdata(f,'todaysdate')
```

```
ans =

    2014  12    23
```

Retrieve all data associated with figure `f`.

```
getappdata(f)
```

```
ans =

     todaysdate: [2014 12 23]
    presenttime: [16 51 5]
```

Input Arguments

`obj` — Graphics object containing the value

figure | uipanel | uibuttongroup | uicontrol | ...

Graphics object containing the value, specified as any graphics object (except an ActiveX component). This is the same graphics object passed to `setappdata` during the storage operation.

`name` — Name identifier

character vector

Name identifier, specified as a character vector. This is the same name identifier passed to `setappdata` during the storage operation.

Data Types: `char`

Output Arguments

`val` — Stored value

any MATLAB data type

Stored value, returned as the same value and data type that was originally stored.

`vals` — All values stored in the graphics object with name identifiers

structure

All values stored in the graphics object with name identifiers, returned as a structure. Each field in the structure corresponds to a stored value. The field names of the structure correspond to the name identifiers assigned when each value was stored.

See Also

See Also

`guidata` | `isappdata` | `rmappdata` | `setappdata`

Topics

"Share Data Among Callbacks"

Introduced before R2006a

getaudiodata

Store recorded audio signal in numeric array

Syntax

```
y = getaudiodata(recorder)
y = getaudiodata(recorder, dataType)
```

Description

`y = getaudiodata(recorder)` returns recorded audio data associated with `audiorecorder` object *`recorder`* to `double` array *`y`*.

`y = getaudiodata(recorder, dataType)` converts the signal data to the specified data type: `'double'`, `'single'`, `'int16'`, `'int8'`, or `'uint8'`.

Output Arguments

y

Audio signal data *`y`* contains the same number of columns as the number of channels in the recording: one for mono, two for stereo. The range of values depends on the data type, as shown in the following table.

Data Type	Sample Value Range
`int8`	-128 to 127
`uint8`	0 to 255
`int16`	-32768 to 32767
`single`	-1 to 1
`double`	-1 to 1

Examples

Collect a sample of your speech with a microphone, and plot the signal data:

```
% Record your voice for 5 seconds.
recObj = audiorecorder;
disp('Start speaking.')
recordblocking(recObj, 5);
disp('End of Recording.');

% Play back the recording.
play(recObj);

% Store data in double-precision array.
myRecording = getaudiodata(recObj);

% Plot the waveform.
plot(myRecording);
```

See Also

audiorecorder

Topics

"Characteristics of Audio Files"
"Record Audio"

GetCharArray

Character array from Automation server

Syntax

IDL Method Signature

```
HRESULT GetCharArray([in] BSTR varName, [in] BSTR Workspace,
    [out, retval] BSTR *mlString)
```

Microsoft Visual Basic Client

```
GetCharArray(varname As String, workspace As String) As String
```

MATLAB Client

```
str = GetCharArray(h,'varname','workspace')
```

Description

`str = GetCharArray(h,'varname','workspace')` gets the character array stored in `varname` from the specified *`workspace`* of the server attached to handle `h` and returns it in `str`. The values for *`workspace`* are `base` or `global`.

Examples

This example uses a Visual Basic .NET client.

1. Create the Visual Basic application. Use the `MsgBox` command to control flow between MATLAB and the application.

   ```
   Dim Matlab As Object
   Dim S As String
   Matlab = CreateObject("matlab.application")
   ```

```
MsgBox("In MATLAB, type" & vbCrLf _
    & "str='new text';")
```

2 Open the MATLAB window, then type:

```
str='new text';
```

3 Click **Ok**.

```
Try
    S = Matlab.GetCharArray("str", "base")
    MsgBox("str = " & S)
Catch ex As Exception
    MsgBox("You did not set 'str' in MATLAB")
End Try
```

The Visual Basic `MsgBox` displays what you typed in MATLAB.

See Also

`PutCharArray` | `GetWorkspaceData` | `GetVariable`

Topics

Introduced before R2006a

getenv

Environment variable

Syntax

```
getenv 'name'
N = getenv('name')
```

Description

`getenv 'name'` searches the underlying operating system environment list for text of the form `name=value`, where `name` is the input character vector. If found, MATLAB returns the character vector `value`. If the specified name cannot be found, an empty matrix is returned.

On UNIX platforms, the shell you use to start MATLAB determines the operating system environment. For example, starting MATLAB on a Mac platform from the `Applications` folder creates a different shell environment from starting MATLAB from Terminal.

`N = getenv('name')` returns `value` to the variable `N`.

Examples

```
os = getenv('OS')
```

```
os =
Windows_NT
```

See Also

`setenv` | `computer` | `pwd` | `ver` | `path`

Introduced before R2006a

getfield

Field of structure array

Syntax

```
value = getfield(struct, 'field')
value = getfield(struct,{sIndx1,...,sIndxM},'field',
{fIndx1,...,fIndxN})
```

Description

`value = getfield(struct, 'field')`, where `struct` is a 1-by-1 structure, returns the contents of the specified field, equivalent to `value = struct.field`. Pass field references as character vectors.

`value = getfield(struct,{sIndx1,...,sIndxM},'field', {fIndx1,...,fIndxN})` returns the contents of the specified field, equivalent to `value = struct(sIndx1,...,sIndxM).field(fIndx1,...,fIndxN)`. The `getfield` function supports multiple sets of `field` and `fIndx` inputs, and all `Indx` inputs are optional. If structure `struct` or any of the fields is a nonscalar structure, and you do not specify an `Indx`, the `getfield` function returns the values associated with the first index. If you specify a single colon operator for an `fIndx` input, enclose it in single quotation marks: `':'`.

Examples

The `what` function returns a structure array that describes the MATLAB files in the current folder. Find the files with the `.m` extension:

```
files = getfield(what, 'm');
```

To perform the same task by indexing requires that you create a temporary variable:

```
templist = what;
files = templist.m;
```

Find values within a structure that contains nested fields:

```
level = 5;
semester = 'Fall';
subject = 'Math';
student = 'John_Doe';
fieldnames = {semester subject student};

% Add data to a structure named grades.
grades(level).(semester).(subject).(student)(10,21:30) = ...
             [85, 89, 76, 93, 85, 91, 68, 84, 95, 73];

% Retrieve the data added.
getfield(grades, {level}, fieldnames{:}, {10,21:30})
```

Using the structure defined in the previous example, find all values in the tenth row of the specified field:

```
getfield(grades, {level}, fieldnames{:}, {10,':'})
```

Tips

- For most cases, retrieve data from a structure array by indexing rather than using the `getfield` function. For more information, see "Access Data in a Structure Array" and "Generate Field Names from Variables".
- Call `getfield` to simplify references to structure arrays with nested fields, or to avoid creating unnecessary temporary variables, as shown in the Examples section.

See Also

`setfield` | `fieldnames` | `isfield` | `orderfields` | `rmfield`

Topics

"Generate Field Names from Variables"
"Access Data in a Structure Array"

Introduced before R2006a

getframe

Capture axes or figure as movie frame

Syntax

```
F = getframe
F = getframe(ax)
F = getframe(fig)
F = getframe(___,rect)
```

Description

`F = getframe` captures the current axes as it appears on the screen as a movie frame. `F` is a structure containing the image data. `getframe` captures the axes at the same size that it appears on the screen. It does not capture tick labels or other content outside the axes outline.

`F = getframe(ax)` captures the axes identified by `ax` instead of the current axes.

`F = getframe(fig)` captures the figure identified by `fig`. Specify a figure if you want to capture the entire interior of the figure window, including the axes title, labels, and tick marks. The captured movie frame does not include the figure menu and tool bars.

`F = getframe(___,rect)` captures the area within the rectangle defined by `rect`. Specify `rect` as a four-element vector of the form `[left bottom width height]`. Use this option with either the `ax` or `fig` input arguments in the previous syntaxes.

Examples

Capture Contents of Current Axes

Create a plot of random data. Capture the axes and return the image data. `getframe` captures the interior of the axes and the axes outline. It does not capture content that extends beyond the axes outline.

```
plot(rand(5))
F = getframe;
```

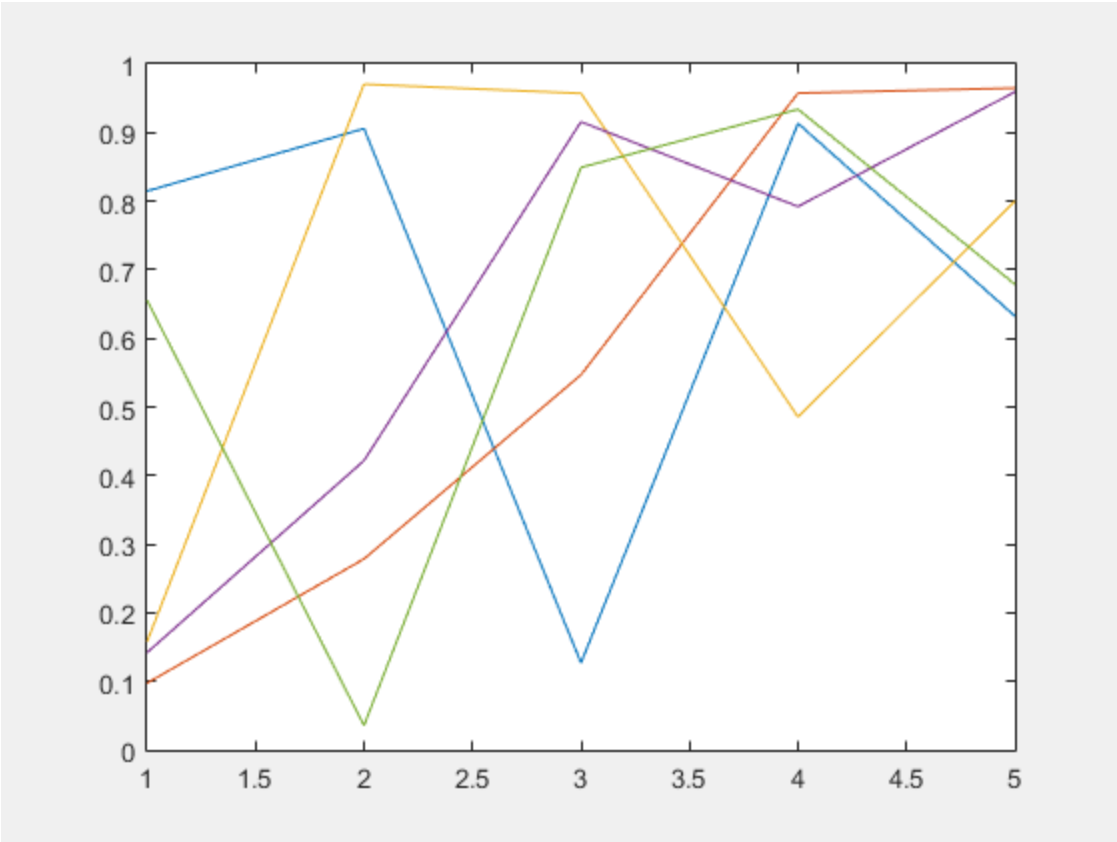

`F` is a structure with the field `cdata` that contains the captured image data.

Display the captured image data using `imshow`.

```
figure
imshow(F.cdata)
```

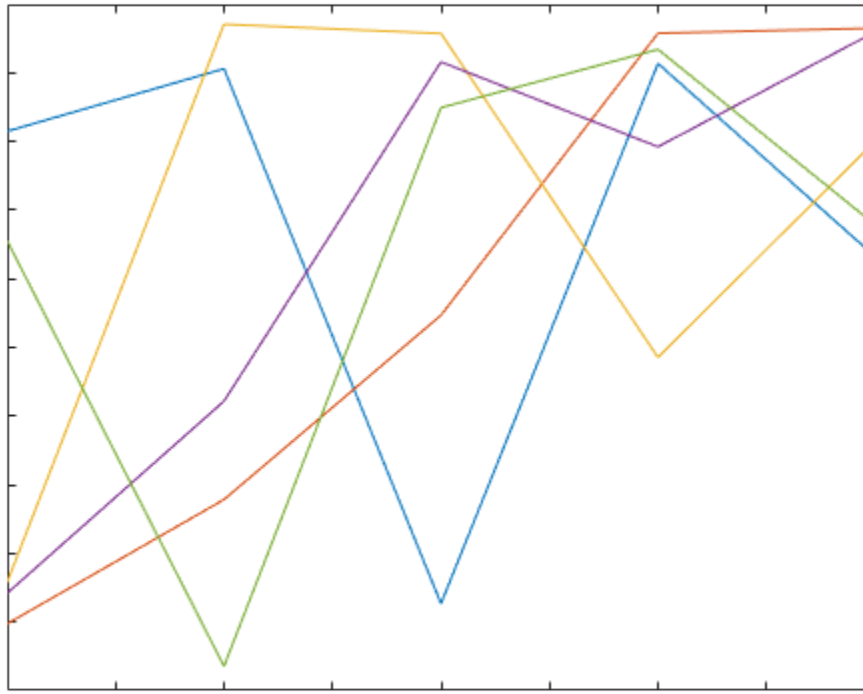

Capture Contents of Figure

Create a surface plot. Capture the interior of the figure window, excluding the menu and tool bars.

```
surf(peaks)
F = getframe(gcf);
```

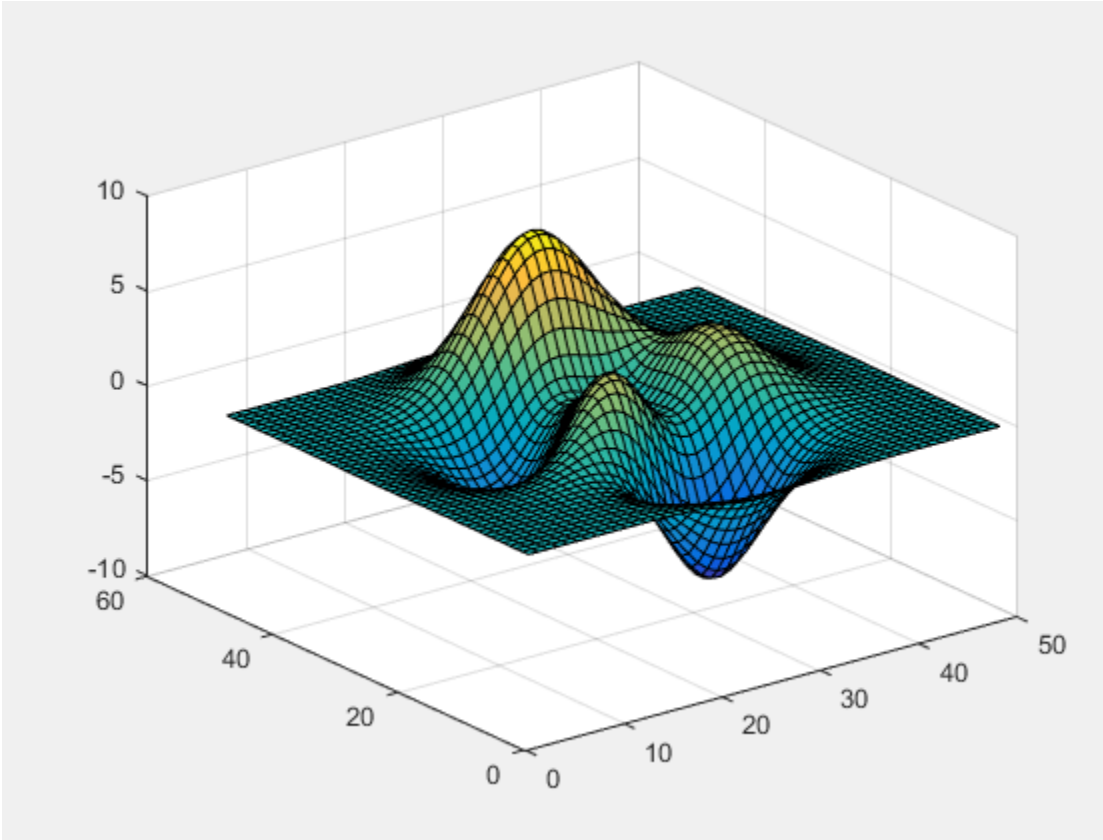

`F` is a structure with the field `cdata` that contains the captured image data.

Display the captured image data using `imshow`.

```
figure
imshow(F.cdata)
```

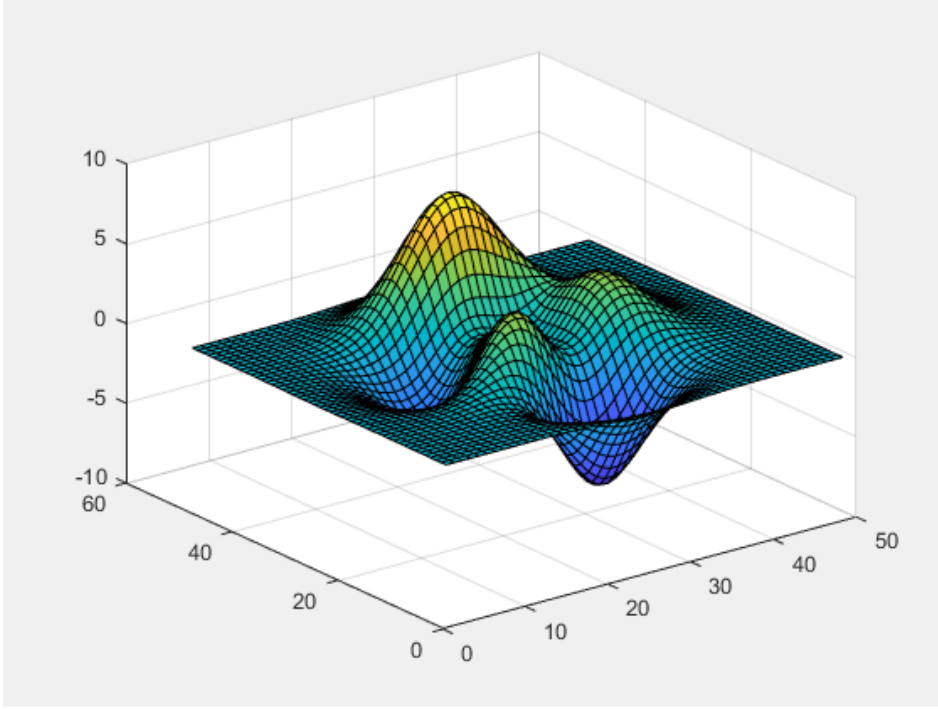

Specify Rectangular Region to Capture

Capture the interior of an axes plus a margin of 30 pixels in each direction. The added margin is necessary to include the tick labels in the capture frame. Depending on the size of the tick labels, the margin might need to be adjusted.

Create a plot of random data.

```
plot(rand(5))
```

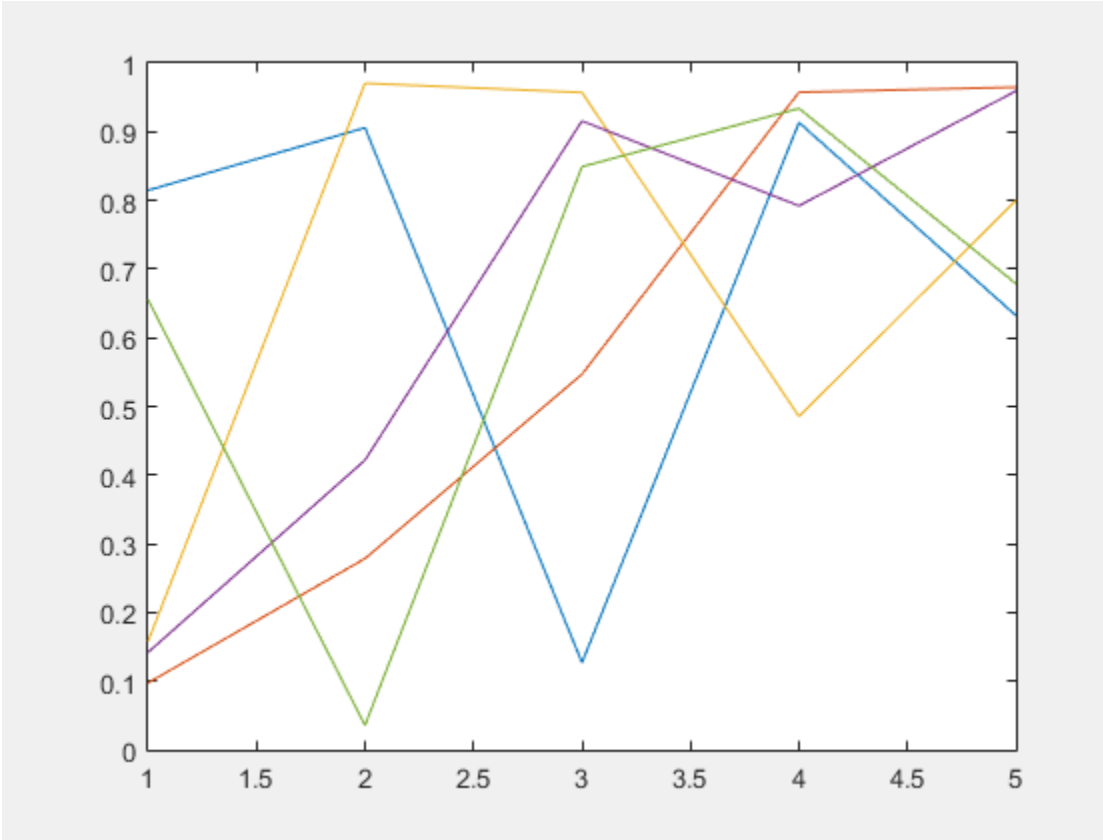

Change the axes units to pixels and return the current axes position. The third and fourth elements of the position vector specify the axes width and height in pixels.

```
drawnow
ax = gca;
ax.Units = 'pixels';
pos = ax.Position
```

```
pos =

   73.8000   47.2000  434.0000  342.3000
```

Create a four-element vector, `rect`, that defines a rectangular area covering the axes plus the desired margin. The first two elements of `rect` specify the lower left corner of

the rectangle relative to the lower left corner of the axes. The last two elements of `rect` specify the width and height of the rectangle. Reset the axes units to the default value of `'normalized'`.

```
marg = 30;
rect = [-marg, -marg, pos(3)+2*marg, pos(4)+2*marg];
F = getframe(gca,rect);
ax.Units = 'normalized';
```

Display the captured image data using `imshow`.

```
figure
imshow(F.cdata)
```

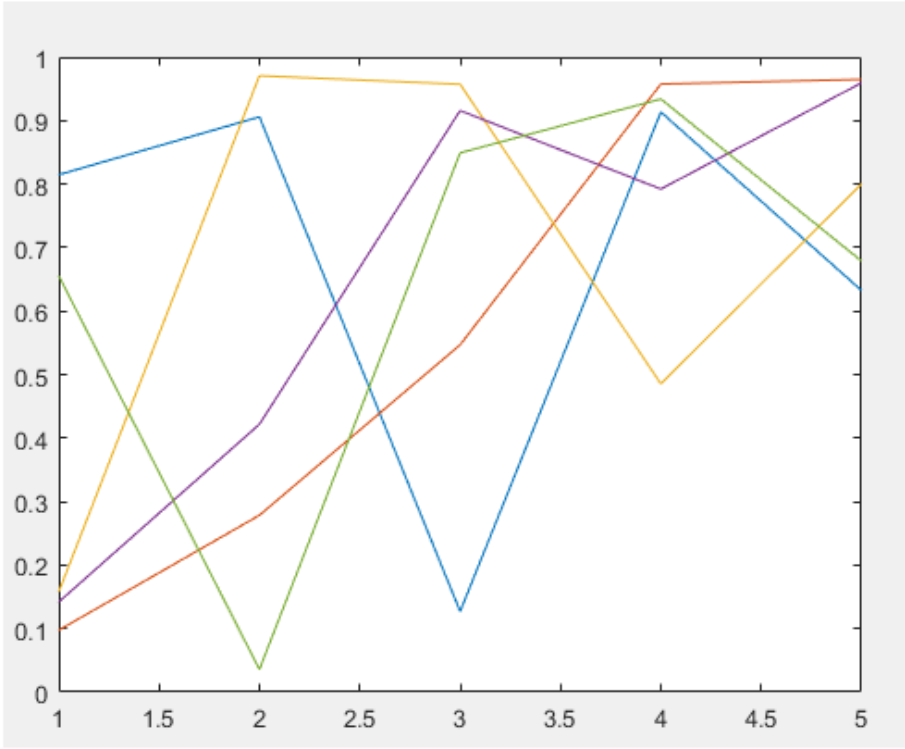

Calculate Region to Include Title and Labels

Calculate a margin around the axes so that the captured image data includes the title, axis labels, and tick labels.

Create a plot with a title and an *x*-axis label.

```
plot(rand(5))
xlabel('x values')
title('Plot of Random Data')
```

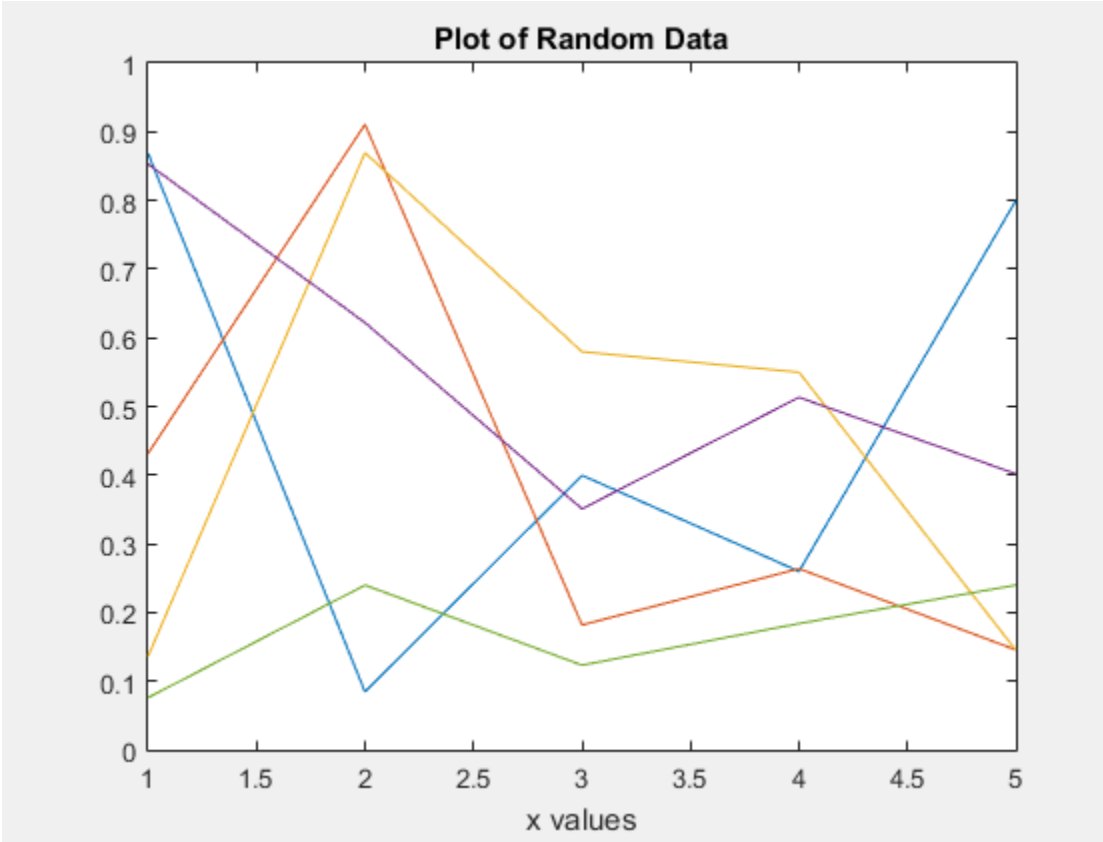

Change the axes units to pixels and store the `Position` and `TightInset` property values for the axes. The `TighInset` property is a four-element vector of the form `[left bottom right top]`. The values are the margins used around the axes for the tick values and text labels.

```
drawnow
ax = gca;
ax.Units = 'pixels';
pos = ax.Position;
ti = ax.TightInset;
```

Create a four-element vector, `rect`, that defines a rectangular area covering the axes plus the automatically calculated margin. The first two elements of `rect` specify the

lower left corner of the rectangle relative to the lower left corner of the axes. The last two elements of `rect` specify the width and height of the rectangle.

```
rect = [-ti(1), -ti(2), pos(3)+ti(1)+ti(3), pos(4)+ti(2)+ti(4)];
F = getframe(ax,rect);
```

Display the captured image data using `imshow`.

```
figure
imshow(F.cdata)
```

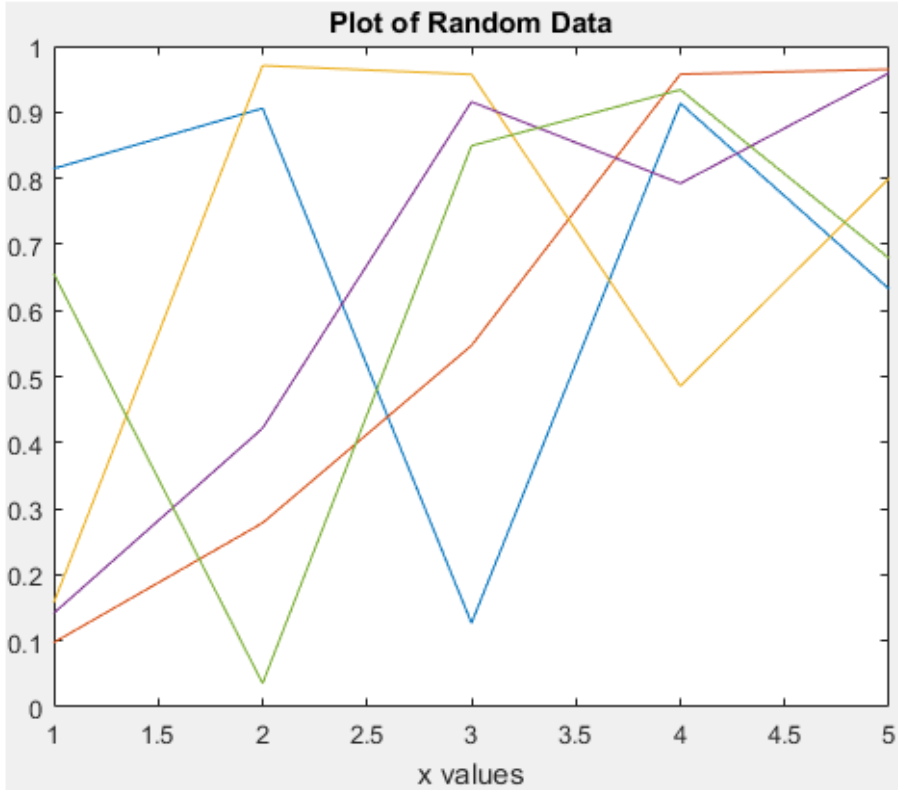

Capture Specific Subplot Axes

Create a figure with two subplots. In the upper subplot, plot a blue line. In the lower subplot, plot a red line.

```
ax1 = subplot(2,1,1);
plot(1:10,'b')
ax2 = subplot(2,1,2);
plot(1:10,'r')
```

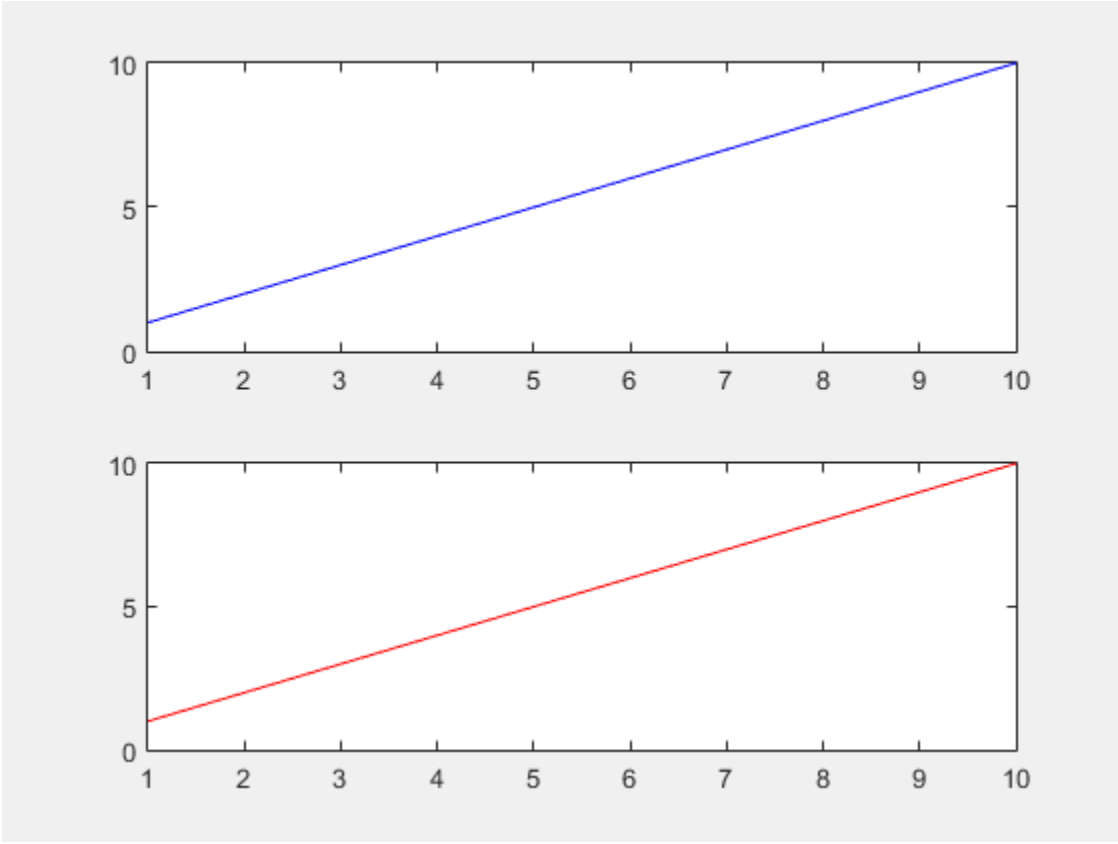

Capture the contents of the lower subplot. `getframe` captures the interior and border of the subplot. It does not capture tick values or labels that extend beyond the outline of the subplot.

```
F = getframe(ax2);
```

Display the captured image data using `imshow`.

```
figure
imshow(F.cdata)
```

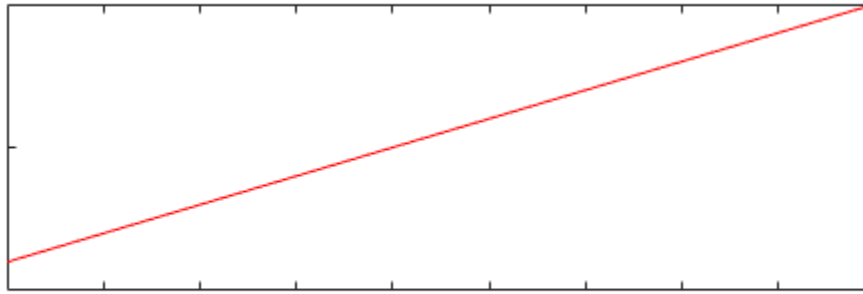

Record Frames and Play Movie

Record frames of the `peaks` function vibrating by using `getframe` in a loop. Preallocate an array to store the movie frames.

```
Z = peaks;
surf(Z)
axis tight manual
ax = gca;
ax.NextPlot = 'replaceChildren';

loops = 40;
F(loops) = struct('cdata',[],'colormap',[]);
for j = 1:loops
    X = sin(j*pi/10)*Z;
    surf(X,Z)
    drawnow
    F(j) = getframe(gcf);
end
```

Playback the movie two times.

```
fig = figure;
```

```
movie(fig,F,2)
```

Input Arguments

ax — Axes to capture

axes object

Axes to capture, specified as an axes object. Use this option if you want to capture an axes that is not the current axes.

`getframe` captures the content within the smallest rectangle that encloses the axes outline. If you want to capture all the tick values and labels, then use the `fig` input argument instead.

Example: `F = getframe(ax);`

fig — Figure to capture

figure object

Figure to capture, specified as a figure object. Use `gcf` to capture the current figure.

Example: `F = getframe(gcf);`

rect — Rectangular area to capture

four-element vector of the form `[left bottom width height]`

Rectangular area to capture, specified as a four-element vector of the form `[left bottom width height]` in pixels. The `left` and `bottom` elements define the position of the lower left corner of the rectangle. The position is relative to the figure or axes that is specified as the first input argument to `getframe`. The `width` and `height` elements define the dimensions of the rectangle.

Specify a rectangle that is fully contained within the figure window.

Example: `F = getframe(gcf,[0 0 560 420]);`

Output Arguments

F — Movie frame

structure

Movie frame, returned as a structure with two fields:

- `cdata` — The image data stored as an array of `uint8` values. The size of the image data array depends on your screen resolution.
- `colormap` — The colormap. On true color systems, this field is empty.

Note: These are some important considerations about the size of `cdata`:

- If you query the size of the region that `getframe` captures (either the figure, the axes, or the region specified by `rect`), the size in pixels might not match the number of elements in `cdata`. This difference is because the number of elements in `cdata` depends on your screen resolution (and operating system settings), but pixels in MATLAB might not correspond to the actual pixels on your screen.
- Starting in R2015b, if you are using a high-resolution system, then the size of `cdata` might be larger than in previous releases or on other systems.

Definitions

Pixels

Distances in pixels are independent of your system resolution on Windows and Macintosh systems:

- On Windows systems, a pixel is 1/96th of an inch.
- On Macintosh systems, a pixel is 1/72nd of an inch.

On Linux systems, the size of a pixel is determined by your system resolution.

Tips

- For the fastest performance when using `getframe`, make sure that the figure is visible on the screen. If the figure is not visible, `getframe` can still capture the figure, but performance can be slower.
- For more control over the resolution of the image data, use the `print` function instead. The `cdata` output argument with print returns the image data. The `resolution` input argument controls the resolution of the image.

See Also

See Also

`frame2im` | `im2frame` | `image` | `imshow` | `movie` | `print`

Introduced before R2006a

GetFullMatrix

Matrix from Automation server workspace

Syntax

IDL Method Signature

```
GetFullMatrix([in] BSTR varname, [in] BSTR workspace,
    [in, out] SAFEARRAY(double) *pr, [in, out] SAFEARRAY(double) *pi)
```

Microsoft Visual Basic Client

```
GetFullMatrix(varname As String, workspace As String,
    [out] XReal As Double, [out] XImag As Double
```

MATLAB Client

```
[xreal ximag] = GetFullMatrix(h,'varname','workspace',zreal,zimag)
```

Description

`[xreal ximag] = GetFullMatrix(h,'varname','workspace',zreal,zimag)` gets matrix stored in variable `varname` from the specified *`workspace`* of the server attached to handle `h`. The function returns the real part in `xreal` and the imaginary part in `ximag`. The values for *`workspace`* are `base` or `global`.

The `zreal` and `zimag` arguments are matrices of the same size as the real and imaginary matrices (`xreal` and `ximag`) returned from the server. The `zreal` and `zimag` matrices are commonly set to zero.

Use `GetFullMatrix` for 2D matrices with values of type `double` only. Use `GetVariable` or `GetWorkspaceData` for other types. To use higher dimensional matrices, reshape the 2D matrix after receiving it from MATLAB.

For VBScript clients, use the `GetWorkspaceData` and `PutWorkspaceData` functions to pass numeric data to and from the MATLAB workspace. These functions use the `variant` data type instead of the `safearray` data type used by `GetFullMatrix` and `PutFullMatrix`. VBScript does not support `safearray`.

Examples

This example uses a Visual Basic .NET client to read data from a MATLAB Automation server:

1. Create the Visual Basic application. To control flow between MATLAB and the application, use the `MsgBox` command.

```
Dim MatLab As Object
Dim Result As String
Dim XReal(4, 4) As Double
Dim XImag(4, 4) As Double
Dim i, j As Integer

MatLab = CreateObject("matlab.application")
Result = MatLab.Execute("M = rand(5);")
MsgBox("In MATLAB, type" & vbCrLf _
    & "M(3,4)")
```

2. Open the MATLAB window and type:

```
M(3,4)
```

3. Click **Ok**.
4. In the Visual Basic application:

```
MatLab.GetFullMatrix("M", "base", XReal, XImag)
i = 2   %0-based array
j = 3

MsgBox("XReal(" & i + 1 & "," & j + 1 & ")" & _
    " = " & XReal(i, j))
```

5. To close and terminate MATLAB, click **Ok**.

See Also

`PutFullMatrix` | `GetVariable` | `GetWorkspaceData` | `Execute`

Topics

Introduced before R2006a

getnext

Get next value from ValueIterator

Syntax

```
X = getnext(ValIter)
```

Description

`X = getnext(ValIter)` returns the next available value in `ValIter`. Use the `hasnext` function to confirm availability of values in `ValIter` before calling `getnext`.

Examples

Get Values from ValueIterator in Reduce Function

Use the `hasnext` and `getnext` functions in a `while` loop within the reduce function to iteratively get values from the `ValueIterator` object. For example,

```
function MeanDistReduceFun(sumLenKey, sumLenIter, outKVStore)
    sumLen = [0 0];
    while hasnext(sumLenIter)
        sumLen = sumLen + getnext(sumLenIter);
    end
    add(outKVStore, 'Mean', sumLen(1)/sumLen(2));
end
```

Always call `hasnext` before `getnext` to confirm availability of a value. `mapreduce` returns an error if you call `getnext` with no remaining values in the `ValueIterator` object.

Input Arguments

`ValIter` — Intermediate value iterator
`ValueIterator` object

Intermediate value iterator, specified as a `ValueIterator` object. The `mapreduce` function automatically creates this object during execution. The second input to the reduce function specifies the variable name for the `ValueIterator` object, which is the variable name to use with the `hasnext` and `getnext` functions.

For more information, see ValueIterator.

See Also

See Also

`hasnext` | `mapreduce`

Topics

ValueIterator
"Build Effective Algorithms with MapReduce"

Introduced in R2014b

getpixelposition

Get component position in pixels

Syntax

```
position = getpixelposition(handle)
position = getpixelposition(handle,recursive)
```

Description

`position = getpixelposition(handle)` gets the position, in pixels, of the component specified by `handle`. MATLAB returns the `position` as a four-element vector that specifies the location and size of the component: [distance from left, distance from bottom, width, height].

`position = getpixelposition(handle,recursive)` gets the position as above. If `recursive` is true, the returned position is relative to the parent figure of `handle`.

Use the `getpixelposition` function only to obtain coordinates for children of figures and container components (uipanels, or uibuttongroups). Results are not reliable for children of axes or other graphics objects.

Examples

This example creates a push button within a panel, and then retrieves its position, in pixels, relative to the *panel*.

```
f = figure('Position',[300 300 300 200]);
p = uipanel('Position',[.2 .2 .6 .6]);
h1 = uicontrol(p,'Style','PushButton',...
     'Units','Normalized',...
     'String','Push Button',...
     'Position',[.1 .1 .5 .2]);
drawnow;
pos1 = getpixelposition(h1)
```

```
pos1 =

   18.6000   12.6000   88.0000   23.2000
```

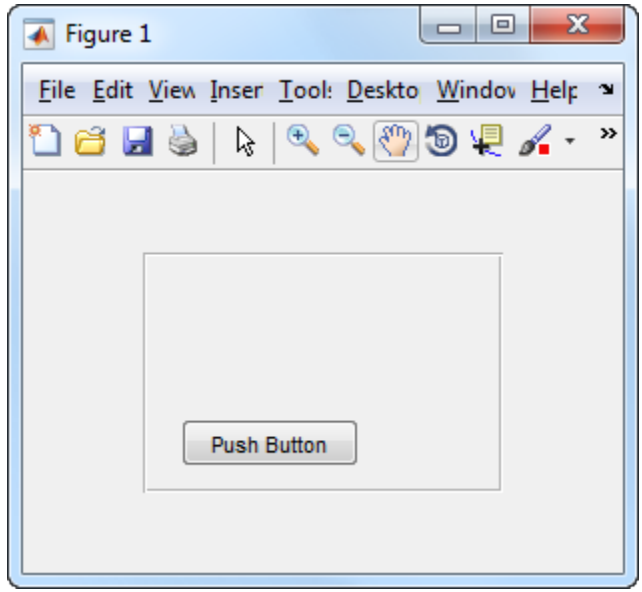

The following statement retrieves the position of the push button, in pixels, relative to the *figure*.

```
pos1 = getpixelposition(h1,true)
```

```
pos1 =
      78.6000   52.6000   88.0000   23.2000
```

Definitions

Pixels

Distances in pixels are independent of your system resolution on Windows and Macintosh systems:

- On Windows systems, a pixel is 1/96th of an inch.

- On Macintosh systems, a pixel is 1/72nd of an inch.

On Linux systems, the size of a pixel is determined by your system resolution.

See Also

`setpixelposition` | `uicontrol` | `uipanel`

getpoints

Return points that define animated line

Syntax

```
[x,y] = getpoints(h)
[x,y,z] = getpoints(h)
```

Description

`[x,y] = getpoints(h)` returns the *x* and *y* coordinates for the points that define the animated line specified by `h`. Create an animated line with the `animatedline` function. For more information on line animations, see AnimatedLine.

`[x,y,z] = getpoints(h)` returns the coordinates for the 3-D animated line specified by `h`. If the line does not have any *z* values, then `getpoints` returns `z` as a vector of zeros the same length as `x` and `y`.

Examples

Return Points from Animated Line

Create an animated line with 10 points. Then, return the points stored in the animated line.

```
h = animatedline(1:10,1:10);
```

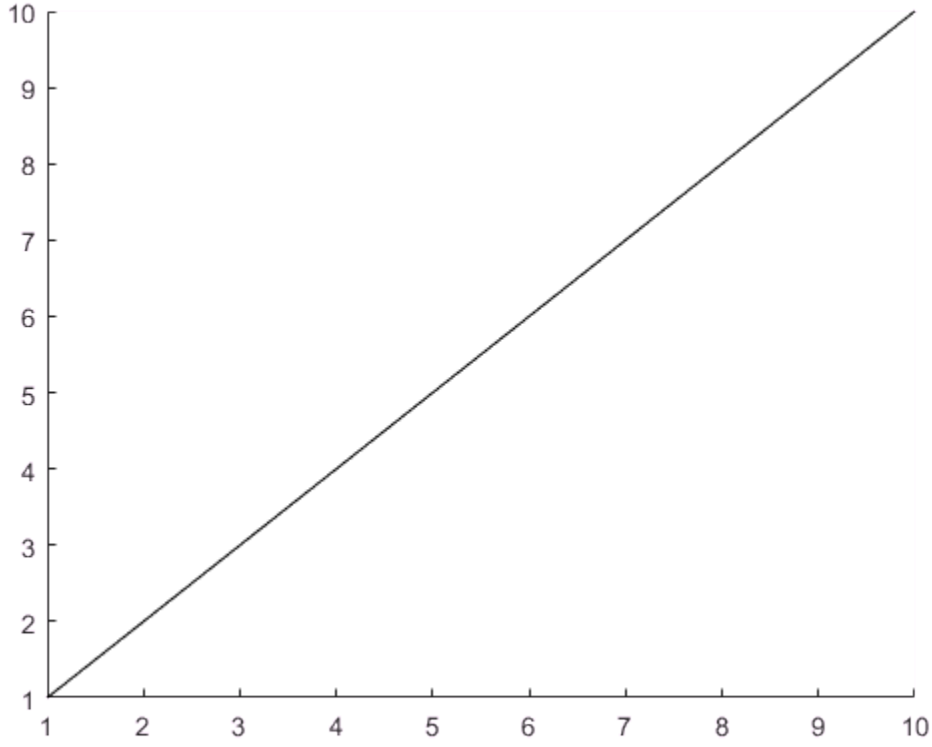


```
[x,y] = getpoints(h)

x =

     1     2     3     4     5     6     7     8     9    10


y =

     1     2     3     4     5     6     7     8     9    10
```

Input Arguments

h — AnimatedLine object
AnimatedLine object

AnimatedLine object. Create an AnimatedLine object using the animatedline function.

Output Arguments

x — x values
vector

x values that define the animated line, returned as vector.

y — y values
vector

y values that define the animated line, returned as vector.

z — z values
vector

z values that define the 3-D animated line, returned as vector.

See Also

See Also

Functions
addpoints | animatedline | clearpoints

Using Objects
AnimatedLine

Introduced in R2014b

getpref

Preference

Syntax

```
getpref('group','pref')
getpref('group','pref',default)
getpref('group',{'pref1','pref2',...'prefn'})
getpref('group',{'pref1',...'prefn'},{default1,...defaultn})
getpref('group')
getpref
```

Description

`getpref('group','pref')` returns the value for the preference specified by `group` and `pref`. It is an error to get a preference that does not exist.

`group` labels a related collection of preferences. You can choose any name that is a legal variable name, and is descriptive enough to be unique, e.g. `'ApplicationOnePrefs'`. The input argument `pref` identifies an individual preference in that group, and must be a legal variable name.

`getpref('group','pref',default)` returns the current value if the preference specified by `group` and `pref` exists. Otherwise creates the preference with the specified default value and returns that value.

`getpref('group',{'pref1','pref2',...'prefn'})` returns a cell array containing the values for the preferences specified by `group` and the cell array of preference names. The return value is the same size as the input cell array. It is an error if any of the preferences do not exist.

`getpref('group',{'pref1',...'prefn'},{default1,...defaultn})` returns a cell array with the current values of the preferences specified by `group` and the cell array of preference names. Any preference that does not exist is created with the specified default value and returned.

`getpref('group')` returns the names and values of all preferences in the `group` as a structure.

`getpref` returns all groups and preferences as a structure.

Note Preference values are persistent and maintain their values between MATLAB sessions. Where they are stored is system dependent.

Examples

Get the Value of an Existing Preference

```
addpref('mytoolbox','version','1.0')
getpref('mytoolbox','version')

ans =
     1.0
```

Create a Preference Using Specified Default Value

```
setpref('mytoolbox','version','1.0')
rmpref('mytoolbox','version')
getpref('mytoolbox','version','1.0');
getpref('mytoolbox','version')

ans =
'1.0'
```

The first call to `getpref` adds the `'version'` preference and sets its value to the default value, `1.0`. The second call to `getpref` verifies that the preference exists, and that its value is `1.0`.

See Also

`addpref` | `ispref` | `rmpref` | `setpref` | `uigetpref` | `uisetpref`

Introduced before R2006a

getsampleusingtime (tscollection)

Extract data samples into new `tscollection` object

Syntax

```
tsc2 = getsampleusingtime(tsc1,Time)
tsc2 = getsampleusingtime(tsc1,StartTime,EndTime)
```

Description

`tsc2 = getsampleusingtime(tsc1,Time)` returns a new `tscollection` tsc2 with a single sample corresponding to Time in tsc1.

`tsc2 = getsampleusingtime(tsc1,StartTime,EndTime)` returns a new `tscollection` tsc2 with samples between the times StartTime and EndTime in tsc1.

Tips

When the time vector in ts1 is numeric, `StartTime` and `EndTime` must also be numeric. When the times in ts1 are date strings and the `StartTime` and `EndTime` values are numeric, then the `StartTime` and `EndTime` values are treated as `datenum` values.

See Also

`tscollection`

Introduced before R2006a

getTag

Class: Tiff

Value of specified tag

Syntax

```
tagValue = getTag(tagId)
```

Description

`tagValue = getTag(tagId)` retrieves the value of the TIFF tag specified by `tagId`. You can specify `tagId` as a character string (`'ImageWidth'`) or using the numeric tag identifier defined by the TIFF specification (256). To see a list of all the tags with their numeric identifiers, view the value of the Tiff object `TagID` property. Use the `TagID` property to specify the value of a tag. For example, `Tiff.TagID.ImageWidth` is equivalent to the tag's numeric identifier.

Examples

Get Value of Tag

Open a `Tiff` object and get the value of a tag. Specify the tag by name.

```
t = Tiff('example.tif','r');
tagval = t.getTag('ImageWidth')
```

```
tagval = 600
```

Alternatively, specify the tag by numeric identifier.

```
tagval1 = t.getTag(256)
```

```
tagval1 = 600
```

Another way to specify the numeric identifier is to use the `TagID` property.

```
tagval2 = t.getTag(Tiff.TagID.ImageWidth)
```

```
tagval2 = 600
```

Close the `Tiff` object.

```
t.close();
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFGetField` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.setTag

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

Tiff.getTagNames

Class: Tiff

List of recognized TIFF tags

Syntax

```
tagNames = Tiff.getTagNames()
```

Description

`tagNames = Tiff.getTagNames()` returns a cell array of TIFF tags recognized by the `Tiff` object.

Examples

Retrieve a list of TIFF tags recognized by the `Tiff` object.

```
Tiff.getTagNames

ans =

    'SubFileType'
    'ImageWidth'
    'ImageLength'
    'BitsPerSample'
    'Compression'
    'Photometric'
    'Thresholding'
    'FillOrder'
    'DocumentName'
    'ImageDescription'
     .
     .
     .
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

See Also

Tiff.getTag

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

gettimeseriesnames

Cell array of names of `timeseries` objects in `tscollection` object

Syntax

```
names = gettimeseriesnames(tsc)
```

Description

`names = gettimeseriesnames(tsc)` returns `names` of `timeseries` objects in a `tscollection` object `tsc`. `names` is a cell array of strings.

Examples

1. Create `timeseries` objects `a` and `b`.

   ```
   a = timeseries(rand(1000,1),'name','position');
   b = timeseries(rand(1000,1),'name','response');
   ```

2. Create a `tscollection` object that includes these two time series.

   ```
   tsc = tscollection({a,b});
   ```

3. Get the names of the `timeseries` objects in `tsc`.

   ```
   names = gettimeseriesnames(tsc)

   names =

       'position'    'response'
   ```

See Also

timeseries | `tscollection`

Introduced before R2006a

gettsafteratevent

New `timeseries` object with samples occurring at or after event

Syntax

```
ts1 = gettsafteratevent(ts,event)
ts1 = gettsafteratevent(ts,event,n)
```

Description

`ts1 = gettsafteratevent(ts,event)` returns a new `timeseries` object ts1 with samples occurring at and after an event in ts, where event can be either a `tsdata.event` object or a string. When event is a `tsdata.event` object, the time defined by event is used. When event is a string, the first `tsdata.event` object in the `Events` property of the time series ts that matches the event name specifies the time.

`ts1 = gettsafteratevent(ts,event,n)` returns a new `timeseries` object ts1 with samples at and after an event in ts, where n is the number of the event occurrence with a matching event name.

Tips

When the `timeseries` object `ts` contains date strings and `event` uses numeric time, the time selected by the `event` is treated as a date that is calculated relative to the `StartDate` property in `ts.TimeInfo`.

When `ts` uses numeric time and `event` uses calendar dates, the time selected by the `event` is treated as a numeric value that is not associated with a calendar date.

See Also

`gettsafterevent` | `gettsbeforeevent` | `gettsbetweenevents` | `tsdata.event` | timeseries

Introduced before R2006a

gettsafterevent

New `timeseries` object with samples occurring after event

Syntax

```
ts1 = gettsafterevent(ts,event)
ts1 = ttsafterevent(ts,event,n)
```

Description

`ts1 = gettsafterevent(ts,event)` returns a new `timeseries` object ts1 with samples occurring after an event in ts, where event can be either a `tsdata.event` object or a string. When event is a `tsdata.event` object, the time defined by event is used. When event is a string, the first `tsdata.event` object in the `Events` property of `ts` that matches the event name specifies the time.

`ts1 = ttsafterevent(ts,event,n)` returns a new `timeseries` object `ts1` with samples occurring after an event in time series `ts`, where n is the number of the event occurrence with a matching event name.

Tips

When the `timeseries` object `ts` contains date strings and `event` uses numeric time, the time selected by the `event` is treated as a date that is calculated relative to the `StartDate` property in `ts.TimeInfo`.

When `ts` uses numeric time and `event` uses calendar dates, the time selected by the `event` is treated as a numeric value that is not associated with a calendar date.

See Also

`gettsafteratevent` | `gettsbeforeevent` | `gettsbetweenevents` | timeseries | `tsdata.event`

Introduced before R2006a

gettsatevent

New `timeseries` object with samples occurring at event

Syntax

```
ts1 = gettsatevent(ts,event)
ts1 = gettsatevent(ts,event,n)
```

Description

`ts1 = gettsatevent(ts,event)` returns a new `timeseries` object `ts1` with samples occurring at an event in `ts`, where event can be either a `tsdata.event` object or a string. When event is a `tsdata.event` object, the time defined by event is used. When event is a string, the first `tsdata.event` object in the `Events` property of `ts` that matches the event name specifies the time.

`ts1 = gettsatevent(ts,event,n)` returns a new time series `ts1` with samples occurring at an event in time series `ts`, where n is the number of the event occurrence with a matching event name.

Tips

When the `timeseries` object `ts` contains date strings and `event` uses numeric time, the time selected by the `event` is treated as a date that is calculated relative to the `StartDate` property in the `ts.TimeInfo`.

When `ts` uses numeric time and `event` uses calendar dates, the time selected by the `event` is treated as a numeric value that is not associated with a calendar date.

See Also

`gettsafterevent` | `gettsafteratevent` | `gettsbeforeevent` | `gettsbetweenevents` | timeseries

Introduced before R2006a

gettsbeforeatevent

New `timeseries` object with samples occurring before or at event

Syntax

```
ts1 = gettsbeforeatevent(ts,event)
ts1 = gettsbeforeatevent(ts,event,n)
```

Description

`ts1 = gettsbeforeatevent(ts,event)` returns a new `timeseries` object `ts1` with samples occurring at and before an event in `ts`, where event can be either a `tsdata.event` object or a string. When event is a `tsdata.event` object, the time defined by event is used. When event is a string, the first `tsdata.event` object in the `Events` property of `ts` that matches the event name specifies the time.

`ts1 = gettsbeforeatevent(ts,event,n)` returns a new `timeseries` object `ts1` with samples occurring at and before an event in time series `ts`, where n is the number of the event occurrence with a matching event name.

Tips

When the `timeseries` object `ts` contains date strings and `event` uses numeric time, the time selected by the `event` is treated as a date that is calculated relative to the `StartDate` property in `ts.TimeInfo`.

When `ts` uses numeric time and `event` uses calendar dates, the time selected by the `event` is treated as a numeric value that is not associated with a calendar date.

See Also

`gettsafterevent` | `gettsbeforeevent` | `gettsbetweenevents` | `tsdata.event`

Introduced before R2006a

gettsbeforeevent

New `timeseries` object with samples occurring before event

Syntax

```
ts1 = gettsbeforeevent(ts,event)
ts1 = gettsbeforeevent(ts,event,n)
```

Description

`ts1 = gettsbeforeevent(ts,event)` returns a new `timeseries` object `ts1` with samples occurring before an event in `ts`, where event can be either a `tsdata.event` object or a string. When event is a `tsdata.event` object, the time defined by event is used. When event is a string, the first `tsdata.event` object in the `Events` property of `ts` that matches the event name specifies the time.

`ts1 = gettsbeforeevent(ts,event,n)` returns a new `timeseries` object `ts1` with samples occurring before an event in `ts`, where n is the number of the event occurrence with a matching event name.

Tips

When the `timeseries` object `ts` contains date strings and `event` uses numeric time, the time selected by the `event` is treated as a date that is calculated relative to the `StartDate` property in `ts.TimeInfo`.

When `ts` uses numeric time and `event` uses calendar dates, the time selected by the `event` is treated as a numeric value that is not associated with a calendar date.

See Also

`gettsafterevent` | `gettsbeforeatevent` | `gettsbetweenevents` | `tsdata.event`

Introduced before R2006a

gettsbetweenevents

New `timeseries` object with samples occurring between events

Syntax

```
ts1 = gettsbetweenevents(ts,event1,event2)
ts1 = gettsbetweenevents(ts,event1,event2,n1,n2)
```

Description

`ts1 = gettsbetweenevents(ts,event1,event2)` returns a new `timeseries` object ts1 with samples occurring between events in `ts`, where `event1` and `event2` can be either a `tsdata.event` object or a string. When `event1` and `event2` are `tsdata.event` objects, the time defined by the events is used. When `event1` and `event2` are strings, the first `tsdata.event` object in the `Events` property of `ts` that matches the event names specifies the time.

`ts1 = gettsbetweenevents(ts,event1,event2,n1,n2)` returns a new `timeseries` object ts1 with samples occurring between events in `ts`, where `n1` and `n2` are the `n`th occurrences of the events with matching event names.

Tips

When the `timeseries` object `ts` contains date strings and `event` uses numeric time, the time selected by the `event` is treated as a date that is calculated relative to the `StartDate` property in `ts.TimeInfo`.

When `ts` uses numeric time and `event` uses calendar dates, the time selected by the `event` is treated as a numeric value that is not associated with a calendar date.

See Also

`gettsafterevent` | `gettsbeforeevent` | `tsdata.event`

Introduced before R2006a

GetVariable

Data from variable in Automation server workspace

Syntax

IDL Method Signature

```
HRESULT GetVariable([in] BSTR varname, [in] BSTR workspace,
    [out, retval] VARIANT* pdata)
```

Microsoft Visual Basic Client

```
GetVariable(varname As String, workspace As String) As Object
```

MATLAB Client

```
D = GetVariable(h,'varname','workspace')
```

Description

`D = GetVariable(h,'varname','workspace')` gets data stored in variable `varname` from the specified `workspace` of the server attached to handle `h` and returns it in output argument `D`. The values for *`workspace`* are `base` or `global`.

Do *not* use `GetVariable` on sparse arrays, structures, or function handles.

If your scripting language requires a result be returned explicitly, use the `GetVariable` function in place of `GetWorkspaceData`, `GetFullMatrix`, or `GetCharArray`.

Examples

This example uses a Visual Basic .NET client to read data from a MATLAB Automation server:

```
Dim Matlab As Object
```

```
Dim Result As String
Dim C2 As Variant
Matlab = CreateObject("matlab.application")
Result = Matlab.Execute("C1 = {25.72, 'hello', rand(4)};")
C2 = Matlab.GetVariable("C1", "base")
MsgBox("Second item in cell array: " & C2(0, 1))
```



See Also

GetWorkspaceData | GetFullMatrix | GetCharArray | Execute

Topics

Introduced before R2006a

Tiff.getVersion

Class: Tiff

LibTIFF library version

Syntax

```
versionString = Tiff.getVersion()
```

Description

`versionString = Tiff.getVersion()` returns the version number and other information about the LibTIFF library.

Examples

Display version of LibTIFF library:

```
Tiff.getVersion
```

```
ans =

LIBTIFF, Version 3.9.5
Copyright (c) 1988-1996 Sam Leffler
Copyright (c) 1991-1996 Silicon Graphics, Inc.
```

References

This method corresponds to the `TIFFGetVersion` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

GetWorkspaceData

Data from Automation server workspace

Syntax

IDL Method Signature

```
HRESULT GetWorkspaceData([in] BSTR varname, [in] BSTR workspace,
    [out] VARIANT* pdata)
```

Microsoft Visual Basic Client

```
GetWorkspaceData(varname As String, workspace As String) As Object
```

MATLAB Client

```
D = GetWorkspaceData(h,'varname','workspace')
```

Description

`D = GetWorkspaceData(h,'varname','workspace')` gets data stored in variable `varname` from the specified `workspace` of the server attached to handle `h` and returns it in output argument `D`. The values for *`workspace`* are `base` or `global`.

Use `GetWorkspaceData` instead of `GetFullMatrix` and `GetCharArray` to get numeric and character array data, respectively. Do *not* use `GetWorkspaceData` on sparse arrays, structures, or function handles.

For VBScript clients, use the `GetWorkspaceData` and `PutWorkspaceData` functions to pass numeric data to and from the MATLAB workspace. These functions use the `variant` data type instead of the `safearray` data type used by `GetFullMatrix` and `PutFullMatrix`. VBScript does not support `safearray`.

Examples

This example uses a Visual Basic .NET client to read data from a MATLAB Automation server:

```
Dim Matlab As Object
Dim C2 As Variant
Dim Result As String
Matlab = CreateObject("matlab.application")
Result = MatLab.Execute("C1 = {25.72, 'hello', rand(4)};")
MsgBox("In MATLAB, type" & vbCrLf & "C1")
Matlab.GetWorkspaceData("C1", "base", C2)
MsgBox("second value of C1 = " & C2(0, 1))
```

Tutorials

- "Conversion of MATLAB Types to COM Types"

See Also

`PutWorkspaceData` | `GetFullMatrix` | `GetCharArray` | `GetVariable` | `Execute`

Topics

"Conversion of MATLAB Types to COM Types"

Introduced before R2006a

ginput

Graphical input from mouse or cursor

Syntax

```
[x,y] = ginput(n)
[x,y] = ginput
[x,y,button] = ginput(...)
```

Description

`ginput` raises crosshairs in the current axes to for you to identify points in the figure, positioning the cursor with the mouse. The figure must have focus before `ginput` can receive input. If it has no axes, one is created upon the first click or keypress.

`[x,y] = ginput(n)` enables you to identify `n` points from the current axes and returns their *x*- and *y*-coordinates in the `x` and `y` column vectors. Press the **Return** key to terminate the input before entering `n` points. Specify `n` as a positive integer.

`[x,y] = ginput` gathers an unlimited number of points until you press the **Return** key.

`[x,y,button] = ginput(...)` returns the *x*-coordinates, the *y*-coordinates, and the button or key designation. `button` is a vector of integers indicating which mouse buttons you pressed (1 for left, 2 for middle, 3 for right), or ASCII numbers indicating which keys on the keyboard you pressed.

Clicking an axes makes that axes the current axes. Even if you set the current axes before calling `ginput`, whichever axes you click becomes the current axes and `ginput` returns points relative to that axes. If you select points from multiple axes, the results returned are relative to the coordinate system of the axes they come from.

Note: MATLAB returns errors such as the following if you start MATLAB with the `-noFigureWindows` or `-nodisplay` flag and then run `ginput`:

```
Error using ginput (line 31)
Terminal mode is no longer supported
```

Examples

Pick 4 two-dimensional points from the figure window.

```
[x,y] = ginput(4)
```

Position the cursor with the mouse. Enter data points by pressing a mouse button or a key on the keyboard. To terminate input before entering 4 points, press the **Return** key.

```
x =
    0.2362
    0.5749
    0.5680
    0.2707

y =
    0.6711
    0.6769
    0.4313
    0.4401

plot(x,y)
```

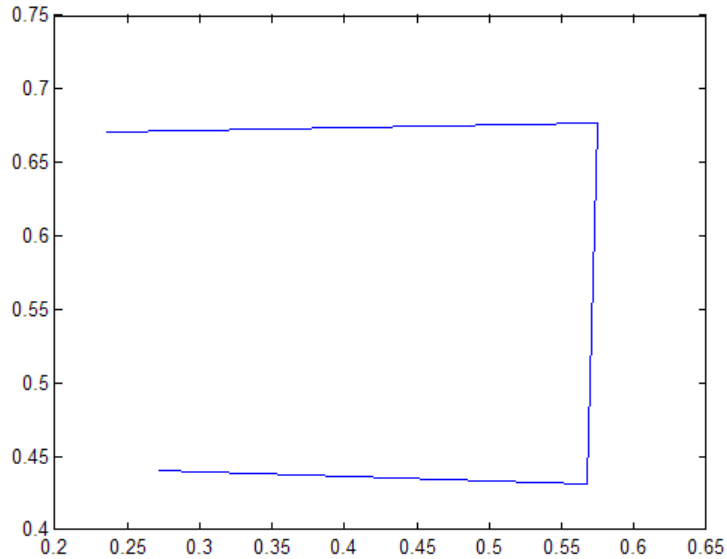

In this example, `plot` rescaled the axes *x*-limits and *y*-limits from `[0 1]` and `[0 1]` to `[0.20 0.65]` and `[0.40 0.75]`. The rescaling occurred because the axes `XLimMode` and `YLimMode` are set to `'auto'` (the default). Consider setting `XLimMode` and `YLimMode` to `'manual'` if you want to maintain consistency when you gather results from `ginput` and plot them together.

Tutorials

- "Subsetting a Graphics Image (Cropping)"

Algorithms

Coordinates returned by `ginput` are scaled to the `XLim` and `YLim` bounds of the axes you click (data units). Setting the axes or figure `Units` property has no effect on the output from `ginput`. You can click anywhere within the figure canvas to obtain coordinates. If you click outside the axes limits, `ginput` extrapolates coordinate values so they are still relative to the axes origin.

See Also

`gtext`

Topics

"Subsetting a Graphics Image (Cropping)"

Introduced before R2006a

global

Declare variables as global

Syntax

```
global var1 ... varN
```

Description

`global var1 ... varN` declares variables `var1 ... varN` as global in scope.

Ordinarily, each MATLAB function has its own local variables, which are separate from those of other functions and from those of the base workspace. However, if several functions all declare a particular variable name as `global`, then they all share a single copy of that variable. Any change of value to that variable, in any function, is visible to all the functions that declare it as global.

If the global variable does not exist the first time you issue the `global` statement, it is initialized to an empty `0x0` matrix.

If a variable with the same name as the global variable already exists in the current workspace, MATLAB issues a warning and changes the value of that variable and its scope to match the global variable.

Examples

Share Global Variable Between Functions

Create a function in your current working folder that sets the value of a global variable.

```
function setGlobalx(val)
global x
x = val;
```

Create a function in your current working folder that returns the value of a global variable. These two functions have separate function workspaces, but they both can access the global variable.

```
function r = getGlobalx
global x
r = x;
```

Set the value of the global variable, x, and obtain it from a different workspace.

```
setGlobalx(1138)
r = getGlobalx
```

```
r =

        1138
```

Share Global Variable Between Function and Command Line

Assign a value to the global variable using the function that you defined in the previous example.

```
clear all
setGlobalx(42)
```

Display the value of the global variable, x. Even though the variable is global, it is not accessible at the command line.

```
x
```

```
Undefined function or variable 'x'.
```

Declare x as a global variable at the command line, and display its value.

```
global x
x
```

```
x =

    42
```

Change the value of x and use the function that you defined in the previous example to return the global value from a different workspace.

```
x = 1701;
r = getGlobalx
```

```
r =
```

1701

Tips

- To clear a global variable from all workspaces, use `clear global` *`variable`*.
- To clear a global variable from the current workspace but not other workspaces, use `clear` *`variable`*.

See Also

See Also

`clear` | `persistent` | `who`

Topics

"Share Data Between Workspaces"

Introduced before R2006a

gmres

Generalized minimum residual method (with restarts)

Syntax

```
x = gmres(A,b)
gmres(A,b,restart)
gmres(A,b,restart,tol)
gmres(A,b,restart,tol,maxit)
gmres(A,b,restart,tol,maxit,M)
gmres(A,b,restart,tol,maxit,M1,M2)
gmres(A,b,restart,tol,maxit,M1,M2,x0)
[x,flag] = gmres(A,b,...)
[x,flag,relres] = gmres(A,b,...)
[x,flag,relres,iter] = gmres(A,b,...)
[x,flag,relres,iter,resvec] = gmres(A,b,...)
```

Description

`x = gmres(A,b)` attempts to solve the system of linear equations `A*x = b` for `x`. The `n`-by-`n` coefficient matrix `A` must be square and should be large and sparse. The column vector `b` must have length `n`. `A` can be a function handle, `afun`, such that `afun(x)` returns `A*x`. For this syntax, `gmres` does not restart; the maximum number of iterations is `min(n,10)`.

"Parameterizing Functions" explains how to provide additional parameters to the function `afun`, as well as the preconditioner function `mfun` described below, if necessary.

If `gmres` converges, a message to that effect is displayed. If `gmres` fails to converge after the maximum number of iterations or halts for any reason, a warning message is printed displaying the relative residual `norm(b-A*x)/norm(b)` and the iteration number at which the method stopped or failed.

`gmres(A,b,restart)` restarts the method every `restart` inner iterations. The maximum number of outer iterations is `min(n/restart,10)`. The maximum number

of total iterations is `restart*min(n/restart,10)`. If `restart` is `n` or `[]`, then `gmres` does not restart and the maximum number of total iterations is `min(n,10)`.

`gmres(A,b,restart,tol)` specifies the tolerance of the method. If `tol` is `[]`, then `gmres` uses the default, `1e-6`.

`gmres(A,b,restart,tol,maxit)` specifies the maximum number of outer iterations, i.e., the total number of iterations does not exceed `restart*maxit`. If `maxit` is `[]` then `gmres` uses the default, `min(n/restart,10)`. If `restart` is `n` or `[]`, then the maximum number of total iterations is `maxit` (instead of `restart*maxit`).

`gmres(A,b,restart,tol,maxit,M)` and `gmres(A,b,restart,tol,maxit,M1,M2)` use preconditioner `M` or `M = M1*M2` and effectively solve the system `inv(M)*A*x = inv(M)*b` for `x`. If `M` is `[]` then `gmres` applies no preconditioner. `M` can be a function handle `mfun` such that `mfun(x)` returns `M\x`.

`gmres(A,b,restart,tol,maxit,M1,M2,x0)` specifies the first initial guess. If `x0` is `[]`, then `gmres` uses the default, an all-zero vector.

`[x,flag] = gmres(A,b,...)` also returns a convergence flag:

`flag = 0`	`gmres` converged to the desired tolerance `tol` within `maxit` outer iterations.
`flag = 1`	`gmres` iterated `maxit` times but did not converge.
`flag = 2`	Preconditioner `M` was ill-conditioned.
`flag = 3`	`gmres` stagnated. (Two consecutive iterates were the same.)

Whenever `flag` is not `0`, the solution `x` returned is that with minimal norm residual computed over all the iterations. No messages are displayed if the `flag` output is specified.

`[x,flag,relres] = gmres(A,b,...)` also returns the relative residual `norm(b-A*x)/norm(b)`. If `flag` is `0`, `relres <= tol`. The third output, `relres`, is the relative residual of the preconditioned system.

`[x,flag,relres,iter] = gmres(A,b,...)` also returns both the outer and inner iteration numbers at which `x` was computed, where `0 <= iter(1) <= maxit` and `0 <= iter(2) <= restart`.

`[x,flag,relres,iter,resvec] = gmres(A,b,...)` also returns a vector of the residual norms at each inner iteration. These are the residual norms for the preconditioned system.

Examples

Using gmres with a Matrix Input

```
A = gallery('wilk',21);
b = sum(A,2);
tol = 1e-12;
maxit = 15;
M1 = diag([10:-1:1 1 1:10]);

x = gmres(A,b,10,tol,maxit,M1);
```

displays the following message:

```
gmres(10) converged at outer iteration 2 (inner iteration 9) to
a solution with relative residual 3.3e-013
```

Using gmres with a Function Handle

This example replaces the matrix `A` in the previous example with a handle to a matrix-vector product function `afun`, and the preconditioner `M1` with a handle to a backsolve function `mfun`. The example is contained in a function `run_gmres` that

- Calls `gmres` with the function handle `@afun` as its first argument.
- Contains `afun` and `mfun` as nested functions, so that all variables in `run_gmres` are available to `afun` and `mfun`.

The following shows the code for `run_gmres`:

```
function x1 = run_gmres
n = 21;
b = afun(ones(n,1));
tol = 1e-12;  maxit = 15;
x1 = gmres(@afun,b,10,tol,maxit,@mfun);
```

```
    function y = afun(x)
        y = [0; x(1:n-1)] + ...
              [((n-1)/2:-1:0)'; (1:(n-1)/2)'].*x + ...
              [x(2:n); 0];
    end

    function y = mfun(r)
        y = r ./ [((n-1)/2:-1:1)'; 1; (1:(n-1)/2)'];
    end
end
```

When you enter

```
x1 = run_gmres;
```

MATLAB software displays the message

```
gmres(10) converged at outer iteration 2 (inner iteration 10)
to a solution with relative residual 1.1e-013.
```

Using a Preconditioner without Restart

This example demonstrates the use of a preconditioner without restarting `gmres`.

Load `west0479`, a real 479-by-479 nonsymmetric sparse matrix.

```
load west0479;
A = west0479;
```

Set the tolerance and maximum number of iterations.

```
tol = 1e-12;
maxit = 20;
```

Define `b` so that the true solution is a vector of all ones.

```
b = full(sum(A,2));
[x0,fl0,rr0,it0,rv0] = gmres(A,b,[],tol,maxit);
```

`fl0` is 1 because `gmres` does not converge to the requested tolerance `1e-12` within the requested 20 iterations. The best approximate solution that `gmres` returns is the last one (as indicated by `it0(2) = 20`). MATLAB stores the residual history in `rv0`.

Plot the behavior of `gmres`.

```
semilogy(0:maxit,rv0/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

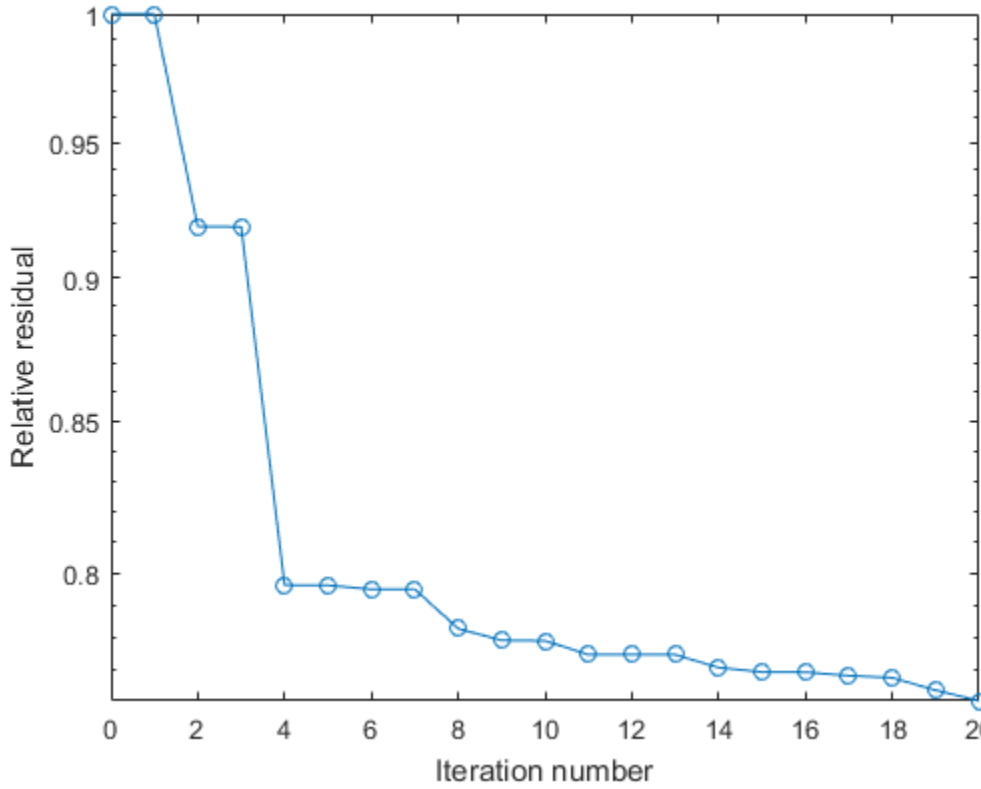

The plot shows that the solution converges slowly. A preconditioner may improve the outcome.

Use `ilu` to form the preconditioner, since `A` is nonsymmetric.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-5));
```

```
Error using ilu
```

```
There is a pivot equal to zero. Consider decreasing
the drop tolerance or consider using the 'udiag' option.
```

Note MATLAB cannot construct the incomplete LU as it would result in a singular factor, which is useless as a preconditioner.

As indicated by the error message, try again with a reduced drop tolerance.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-6));
[x1,fl1,rr1,it1,rv1] = gmres(A,b,[],tol,maxit,L,U);
```

`fl1` is 0 because `gmres` drives the relative residual to `9.5436e-14` (the value of `rr1`). The relative residual is less than the prescribed tolerance of `1e-12` at the sixth iteration (the value of `it1(2)`) when preconditioned by the incomplete LU factorization with a drop tolerance of `1e-6`. The output, `rv1(1)`, is `norm(M\b)`, where `M = L*U`. The output, `rv1(7)`, is `norm(U\(L\(b-A*x1)))`.

Follow the progress of `gmres` by plotting the relative residuals at each iteration starting from the initial estimate (iterate number 0).

```
semilogy(0:it1(2),rv1/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

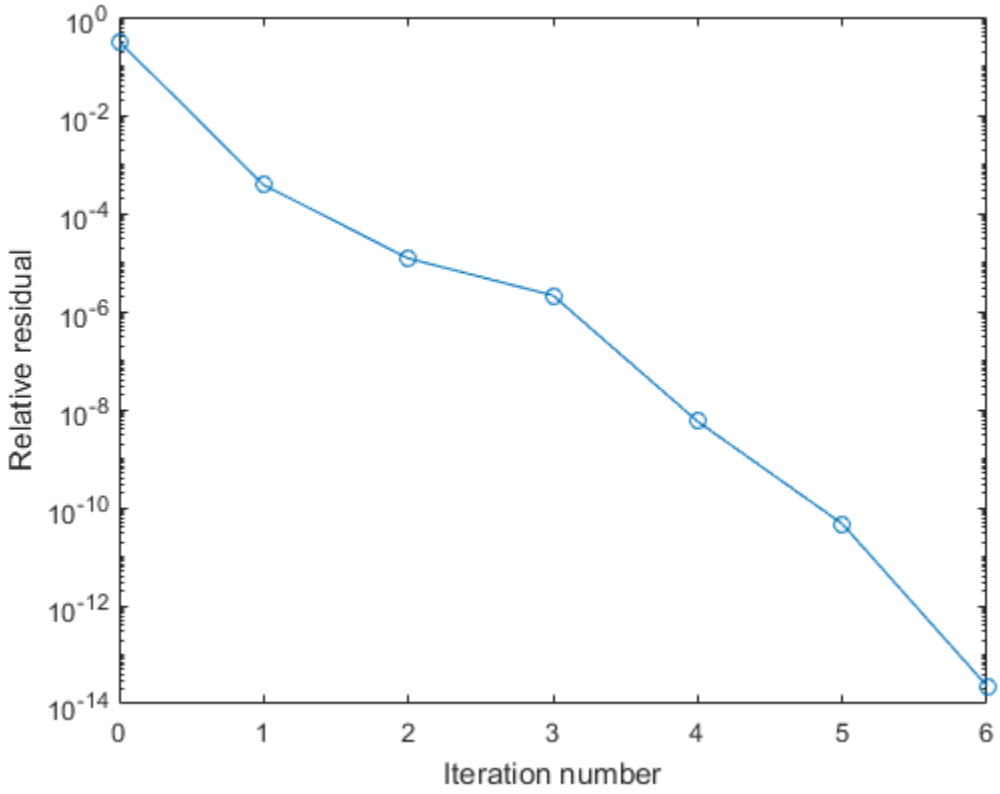

Using a Preconditioner with Restart

This example demonstrates the use of a preconditioner with restarted `gmres`.

Load `west0479`, a real 479-by-479 nonsymmetric sparse matrix.

```
load west0479;
A = west0479;
```

Define `b` so that the true solution is a vector of all ones.

```
b = full(sum(A,2));
```

Construct an incomplete LU preconditioner as in the previous example.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-6));
```

The benefit to using restarted `gmres` is to limit the amount of memory required to execute the method. Without restart, `gmres` requires `maxit` vectors of storage to keep the basis of the Krylov subspace. Also, `gmres` must orthogonalize against all of the previous vectors at each step. Restarting limits the amount of workspace used and the amount of work done per outer iteration. Note that even though preconditioned `gmres` converged in six iterations above, the algorithm allowed for as many as twenty basis vectors and therefore, allocated all of that space up front.

Execute `gmres(3)`, `gmres(4)`, and `gmres(5)`

```
tol = 1e-12;
maxit = 20;
re3 = 3;
[x3,fl3,rr3,it3,rv3] = gmres(A,b,re3,tol,maxit,L,U);
re4 = 4;
[x4,fl4,rr4,it4,rv4] = gmres(A,b,re4,tol,maxit,L,U);
re5 = 5;
[x5,fl5,rr5,it5,rv5] = gmres(A,b,re5,tol,maxit,L,U);
```

`fl3`, `fl4`, and `fl5` are all 0 because in each case restarted `gmres` drives the relative residual to less than the prescribed tolerance of `1e-12`.

The following plots show the convergence histories of each restarted `gmres` method. `gmres(3)` converges at outer iteration 5, inner iteration 3 (`it3 = [5, 3]`) which would be the same as outer iteration 6, inner iteration 0, hence the marking of 6 on the final tick mark.

```
figure
semilogy(1:1/3:6,rv3/norm(b),'-o');
h1 = gca;
h1.XTick = [1:1/3:6];
h1.XTickLabel = ['1';' ';' ';'2';' ';' ';'3';' ';' ';'4';' ';' ';'5';' ';' ';'6';];
title('gmres(3)')
xlabel('Iteration number');
ylabel('Relative residual');
```

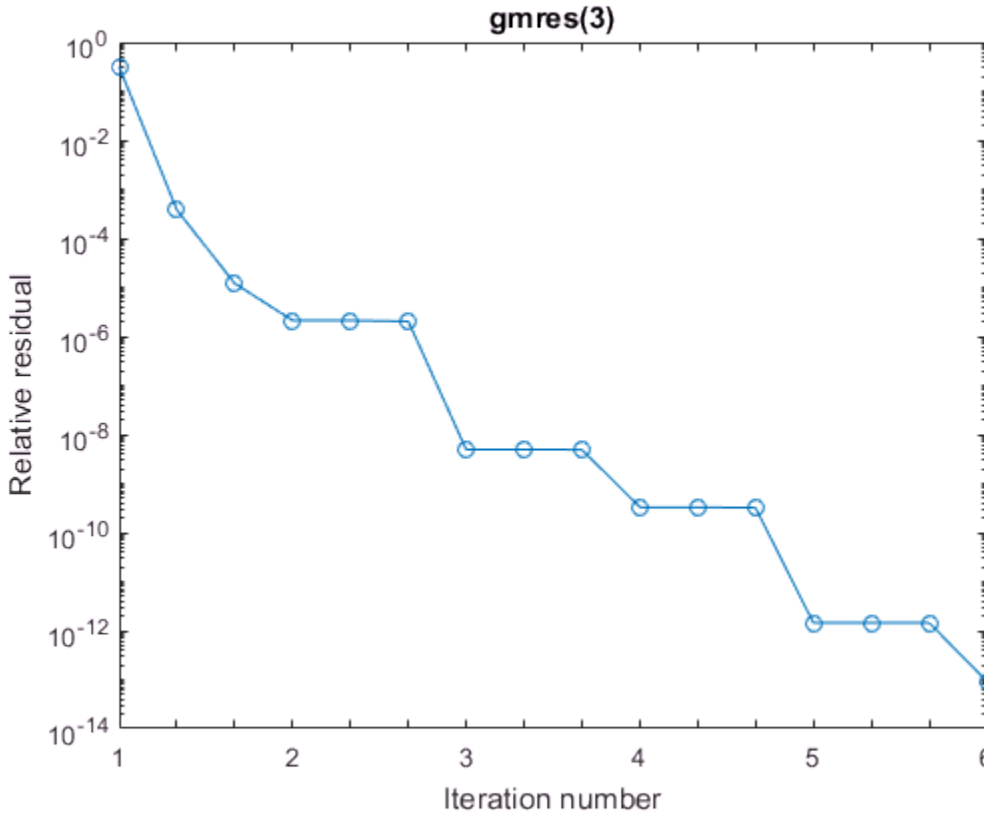


```
figure
semilogy(1:1/4:3,rv4/norm(b),'-o');
h2 = gca;
h2.XTick = [1:1/4:3];
h2.XTickLabel = ['1';' ';' ';' ';'2';' ';' ';' ';'3'];
title('gmres(4)')
xlabel('Iteration number');
ylabel('Relative residual');
```

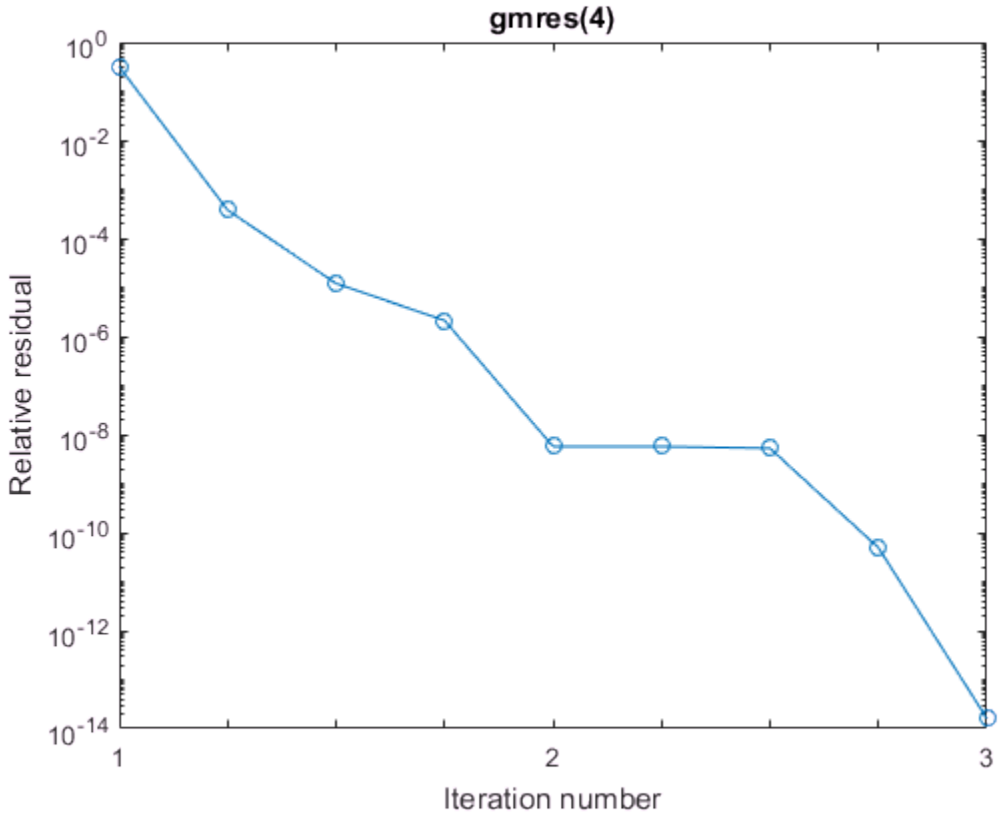


```
figure
semilogy(1:1/5:2.8,rv5/norm(b),'-o');
h3 = gca;
h3.XTick = [1:1/5:2.8];
h3.XTickLabel = ['1';' ';' ';' ';' ';'2';' ';' ';' ';' '];
title('gmres(5)')
xlabel('Iteration number');
ylabel('Relative residual');
```

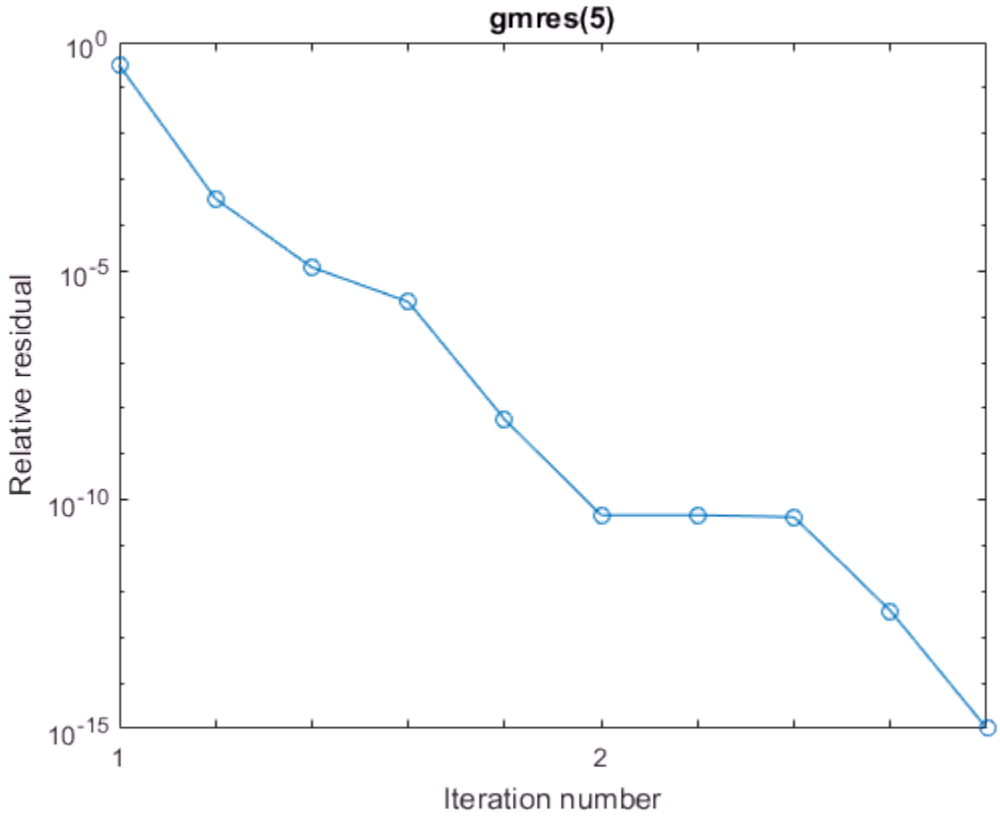

References

Barrett, R., M. Berry, T. F. Chan, et al., *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*, SIAM, Philadelphia, 1994.

Saad, Youcef and Martin H. Schultz, "GMRES: A generalized minimal residual algorithm for solving nonsymmetric linear systems," *SIAM J. Sci. Stat. Comput.*, July 1986, Vol. 7, No. 3, pp. 856-869.

See Also

See Also

`bicg` | `bicgstab` | `cgs` | `ilu` | `lsqr` | `minres` | `mldivide` | `pcg` | `qmr` | `symmlq`

Topics

"Create Function Handle"

Introduced before R2006a

gobjects

Initialize array for graphics objects

Syntax

```
H = gobjects(n)
H = gobjects(s1,...,sn)
H = gobjects(v)

H = gobjects
H = gobjects(0)
```

Description

`H = gobjects(n)` returns an `n`-by-`n` graphics object array. Use the `gobjects` function instead of the `ones` or `zeros` functions to preallocate an array to store graphics objects.

`H = gobjects(s1,...,sn)` returns an `s1`-by-...-by-`sn` graphics object array, where the list of integers `s1,...,sn` defines the dimensions of the array. For example, `gobjects(2,3)` returns a 2-by-3 array.

`H = gobjects(v)` returns a graphics object array where the elements of the row vector, `v`, define the dimensions of the array. For example, `gobjects([2,3,4])` returns a 2-by-3-by-4 array.

`H = gobjects` returns a 1-by-1 graphics object array.

`H = gobjects(0)` returns an empty graphics object array.

Examples

Specify Array Dimensions

Preallocate a 4-by-1 array to store graphics handles.

```
H = gobjects(4,1)
```

```
H 
  4×1 GraphicsPlaceholder array:

  GraphicsPlaceholder
  GraphicsPlaceholder
  GraphicsPlaceholder
  GraphicsPlaceholder
```

Specify Array Dimensions with Size of Existing Array

Create an array to store graphics handles using the size of an existing array.

Define A as a 3-by-4 array.

```
A = [1,2,3,2; 4,5,6,6; 7,8,9,7];
```

Create an array of graphics handles using the size of A.

```
v = size(A);
H = gobjects(v);
```

The dimensions of the graphics handle array are the same as the dimensions of A.

```
isequal(size(H),size(A))
```

```
ans = logical
   1
```

Return Empty Handle Array

Use the `gobjects` function to return an empty array.

```
H = gobjects(0)
```

```
H 

  0×0 empty GraphicsPlaceholder array.
```

Input Arguments

n — defines n-by-n array

integer value

Size of the object array, specified as an integer value. Negative integers are treated as 0. The array has dimensions n-by-n.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

s1, . . . , sn — Size of each array dimension

two or more integer values

Size of each array dimension, specified as a list of two or more integer values. Negative integers are treated as 0.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

v — Size of each array dimension

row vector of integer values

Size of each array dimension, specified as a row vector of integer values. Negative integers are treated as 0.

Example: [2,4,6,7]

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

0 — Define an empty array

one or more dimensions equal to 0

Define an empty array by specifying one or more dimension equal to 0

Output Arguments

H — Initialized graphics object array

graphics object array of specified size

Initialized graphics object array of type `GraphicsPlaceholder`. Use this array to contain any type of graphics object.

See Also

Topics

"Graphics Arrays"

Introduced in R2013a

gplot

Plot nodes and links representing adjacency matrix

Syntax

```
gplot(A,Coordinates)
gplot(A,Coordinates,LineSpec)
[X,Y] = gplot(A,Coordinates)
```

Description

The `gplot` function graphs a set of coordinates using an adjacency matrix.

`gplot(A,Coordinates)` plots a graph of the nodes defined in `Coordinates` according to the n-by-n adjacency matrix `A`, where n is the number of nodes. `Coordinates` is an n-by-2 matrix, where n is the number of nodes and each coordinate pair represents one node.

`gplot(A,Coordinates,LineSpec)` plots the nodes using the line type, marker symbol, and color specified by *`LineSpec`*.

`[X,Y] = gplot(A,Coordinates)` returns the `NaN`-punctuated vectors `X` and `Y` without generating a plot. Use `X` and `Y` to generate a plot at a later time using `plot(X,Y)`. To use this syntax, `Coordinates` must be of type single or double.

Examples

Plot Graph of Nodes Using Asterisks

Plot half of a "Bucky ball" carbon molecule, placing asterisks at each node.

```
k = 1:30;
[B,XY] = bucky;
gplot(B(k,k),XY(k,:),'-*')
axis square
```

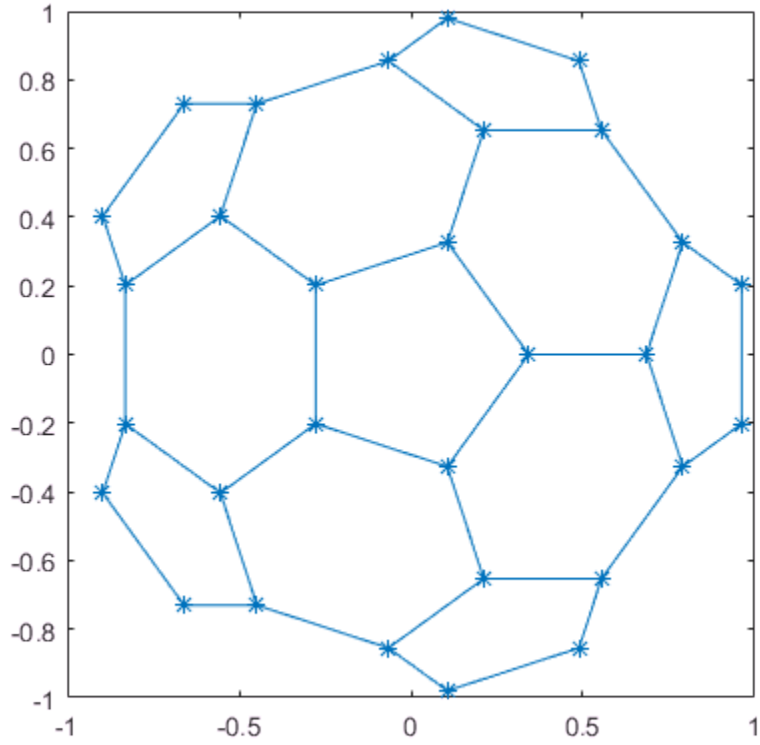

Tips

For two-dimensional data, `Coordinates(i,:) = [x(i) y(i)]` denotes node `i`, and `Coordinates(j,:) = [x(j)y(j)]` denotes node `j`. If node `i` and node `j` are connected, `A(i,j)` or `A(j,i)` is nonzero; otherwise, `A(i,j)` and `A(j,i)` are zero.

See Also

`LineSpec` | `sparse` | `spy`

Introduced before R2006a

grabcode

Extract MATLAB code from file published to HTML

Syntax

```
grabcode filename
grabcode url
code = grabcode(filename)
```

Description

`grabcode filename` copies the MATLAB code from the HTML file `filename` and pastes it into an untitled document in the Editor. Use `grabcode` to get MATLAB code from published files when the source code is not readily available. `filename` is the HTML file created by publishing a MATLAB code file (`*.m`) or exporting a live script (`*.mlx`) to HTML. In both cases, the MATLAB code from the file appears as HTML comments at the end of `filename`.

`grabcode url` copies MATLAB code from the page or file specified by `url` and pastes it into an untitled document in the Editor.

`code = grabcode(filename)` returns the MATLAB code from `filename` to a character array.

Examples

Get MATLAB Code from HTML File

Use `grabcode` to get MATLAB® code from an existing HTML file.

Extract the MATLAB code from `my_sine_wave.html` into the variable `code`. To view the contents of the file, double-click `my_sine_wave.html` in your current folder.

```
code = grabcode('my_sine_wave.html')
```

```
code =
```

```
'%% Plot Sine Wave
 % Calculate and plot a sine wave.
 %% Calculate and Plot Sine Wave
 % Calculate and plot |y = sin(x)|.
 function sine_wave_f(x)
 y = sin(x);
 plot(x,y)
 %% Modify Plot Properties
 title('Sine Wave', 'FontWeight','bold')
 xlabel('x')
 ylabel('sin(x)')
 set(gca, 'Color', 'w')
 set(gcf, 'MenuBar', 'none') '
```

Input Arguments

`filename` — Name of HTML file

character vector

Name of the HTML file, specified as a character vector.

Example: `name.html`

`url` — Web page address or location of the HTML file

character vector

Web page address or location of HTML file, specified as a character vector.

Example: `http://www.mathworks.com/matlabcode.html`

See Also

See Also

`publish`

Topics

"Publishing MATLAB Code"
"Share Live Scripts"

Introduced before R2006a

gradient

Numerical gradient

Syntax

```
FX = gradient(F)
[FX,FY] = gradient(F)
[FX,FY,FZ,...,FN] = gradient(F)
[ ___ ] = gradient(F,h)
[ ___ ] = gradient(F,hx,hy,...,hN)
```

Description

`FX = gradient(F)` returns the one-dimensional numerical gradient of vector `F`. The output `FX` corresponds to $\partial F/\partial x$, which are the differences in the x (horizontal) direction. The spacing between points is assumed to be `1`.

`[FX,FY] = gradient(F)` returns the x and y components of the two-dimensional numerical gradient of matrix `F`. The additional output `FY` corresponds to $\partial F/\partial y$, which are the differences in the y (vertical) direction. The spacing between points in each direction is assumed to be `1`.

`[FX,FY,FZ,...,FN] = gradient(F)` returns the `N` components of the numerical gradient of `F`, where `F` is an array with `N` dimensions.

`[ ___ ] = gradient(F,h)` uses `h` as a uniform spacing between points in each direction. You can specify any of the output arguments in previous syntaxes.

`[ ___ ] = gradient(F,hx,hy,...,hN)` specifies `N` spacing parameters for the spacing in each dimension of `F`.

Examples

Gradient of Vector

Calculate the gradient of a monotonically increasing vector.

```
x = 1:10

x =

     1     2     3     4     5     6     7     8     9    10


fx = gradient(x)

fx =

     1     1     1     1     1     1     1     1     1     1
```

Contour Plot of Vector Field

Calculate the 2-D gradient of $xe^{-x^2-y^2}$ on a grid.

```
x = -2:0.2:2;
y = x';
z = x .* exp(-x.^2 - y.^2);
[px,py] = gradient(z);
```

Plot the contour lines and vectors in the same figure.

```
figure
contour(x,y,z)
hold on
quiver(x,y,px,py)
hold off
```

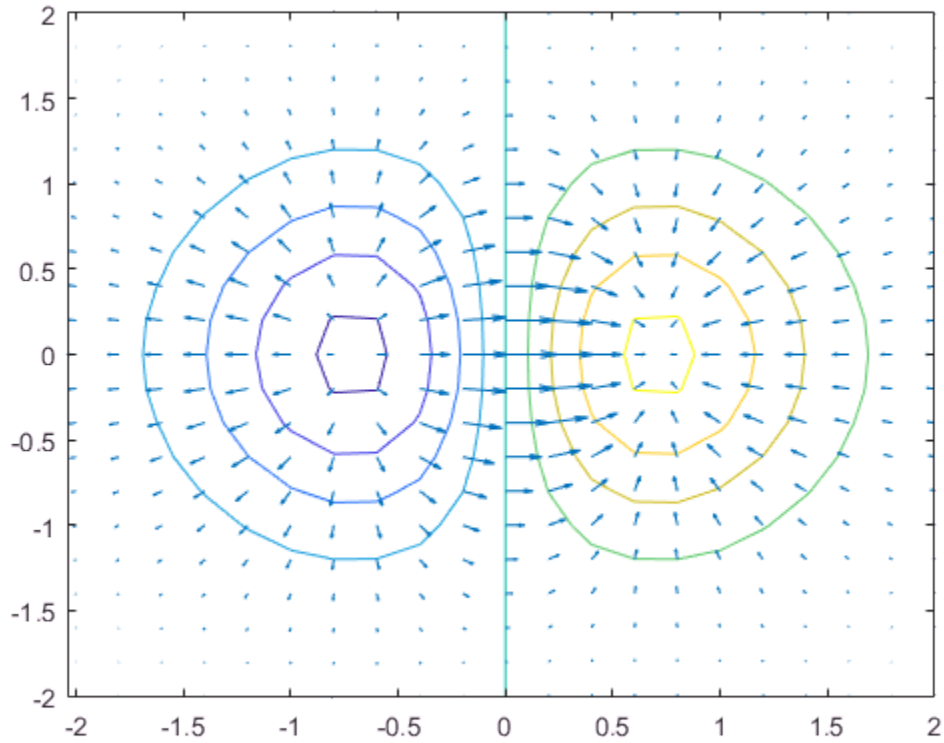

Linear Function Approximation

Use the gradient at a particular point to linearly approximate the function value at a nearby point and compare it to the actual value.

The equation for linear approximation of a function value is

$$f(x) \approx f(x_0) + \left(\nabla f\right)_{x_0} \cdot (x - x_0).$$

That is, if you know the value of a function $f(x_0)$ and the slope of the derivative $(\nabla f)_{x_0}$ at a particular point x_0, then you can use this information to approximate the value of the function at a nearby point $f(x) = f(x_0 + \varepsilon)$.

Calculate some values of the sine function between -1 and 0.5. Then calculate the gradient.

```
y = sin(-1:0.25:0.5);
yp = gradient(y,0.25);
```

Use the function value and derivative at `x = 0.5` to predict the value of `sin(0.5005)`.

```
y_guess = y(end) + yp(end)*(0.5005 - 0.5)
```

```
y_guess = 0.4799
```

Compute the actual value for comparison.

```
y_actual = sin(0.5005)
```

```
y_actual = 0.4799
```

Compute Gradient at Specified Point

Find the value of the gradient of a multivariate function at a specified point.

Consider the multivariate function $f(x, y) = x^2 y^3$.

```
x = -3:0.2:3;
y = x';
f = x.^2 .* y.^3;
surf(x,y,f)
xlabel('x')
ylabel('y')
zlabel('z')
```

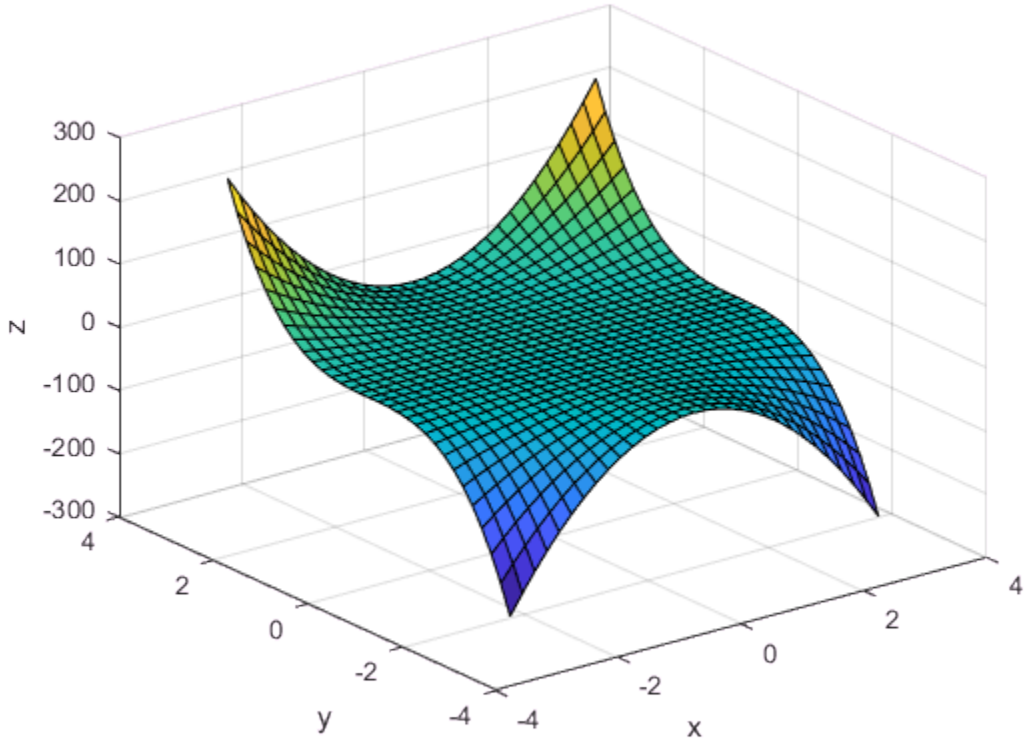

Calculate the gradient on the grid.

```
[fx,fy] = gradient(f,0.2);
```

Extract the value of the gradient at the point `(1,-2)`. To do this, first obtain the indices of the point you want to work with. Then, use the indices to extract the corresponding gradient values from `fx` and `fy`.

```
x0 = 1;
y0 = -2;
t = (x == x0) & (y == y0);
indt = find(t);
f_grad = [fx(indt) fy(indt)]
```

```
f_grad =
```

```
-16.0000   12.0400
```

The exact value of the gradient of $f(x, y) = x^2y^3$ at the point (1,-2) is

$$\begin{aligned}(\nabla f)_{(1,-2)} &= 2xy^3\hat{i} + 3x^2y^2\hat{j} \\ &= -16\hat{i} + 12\hat{j}.\end{aligned}$$

- "Calculate Tangent Plane to Surface"

Input Arguments

F — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

h — Uniform spacing between points

1 (default) | scalar

Uniform spacing between points in all directions, specified as a scalar.

Example: `[FX,FY] = gradient(F,2)`

Data Types: `single` | `double`
Complex Number Support: Yes

hx, hy, hN — Spacing between points (as separate inputs)

1 (default) | scalars | vectors

Spacing between points in each direction, specified as separate inputs of scalars or vectors. The number of inputs must match the number of array dimensions of `F`. Each input can be a scalar or vector:

- A scalar specifies a constant spacing in that dimension.

- A vector specifies the coordinates of the values along the corresponding dimension of F. In this case, the length of the vector must match the size of the corresponding dimension.

Example: `[FX,FY] = gradient(F,0.1,2)`

Example: `[FX,FY] = gradient(F,[0.1 0.3 0.5],2)`

Example: `[FX,FY] = gradient(F,[0.1 0.3 0.5],[2 3 5])`

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

FX, FY, FZ, FN — Numerical gradients
arrays

Numerical gradients, returned as arrays of the same size as F. The first output FX is always the gradient along the 2nd dimension of F, going across columns. The second output FY is always the gradient along the 1st dimension of F, going across rows. For the third output FZ and the outputs that follow, the Nth output is the gradient along the Nth dimension of F.

Definitions

Numerical Gradient

The *numerical gradient* of a function is a way to estimate the values of the partial derivatives in each dimension using the known values of the function at certain points.

For a function of two variables, $F(x,y)$, the gradient is

$$\nabla F = \frac{\partial F}{\partial x}\hat{i} + \frac{\partial F}{\partial y}\hat{j}.$$

The gradient can be thought of as a collection of vectors pointing in the direction of increasing values of F. In MATLAB, you can compute numerical gradients for functions with any number of variables. For a function of N variables, $F(x,y,z, \ldots)$, the gradient is

$$\nabla F = \frac{\partial F}{\partial x}\hat{i} + \frac{\partial F}{\partial y}\hat{j} + \frac{\partial F}{\partial z}\hat{k} + \ldots + \frac{\partial F}{\partial N}\hat{n}.$$

Algorithms

`gradient` calculates the *central difference* for interior data points. For example, consider a matrix with unit-spaced data, `A`, that has horizontal gradient `G = gradient(A)`. The interior gradient values, `G(:,j)`, are

```
G(:,j) = 0.5*(A(:,j+1) - A(:,j-1));
```

The subscript `j` varies between `2` and `N-1`, with `N = size(A,2)`.

`gradient` calculates values along the edges of the matrix with *single-sided differences*:

```
G(:,1) = A(:,2) - A(:,1);
G(:,N) = A(:,N) - A(:,N-1);
```

If you specify the point spacing, then `gradient` scales the differences appropriately. If you specify two or more outputs, then the function also calculates differences along other dimensions in a similar manner. Unlike the `diff` function, `gradient` returns an array with the same number of elements as the input.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`del2` | `diff`

Topics

"Calculate Tangent Plane to Surface"

Introduced before R2006a

addedge

Add new edge to graph

Syntax

```
H = addedge(G,s,t)
H = addedge(G,s,t,w)
H = addedge(G,EdgeTable)
```

Description

`H = addedge(G,s,t)` adds an edge to graph `G` between nodes `s` and `t`. The edge between `s` and `t` cannot already exist in `G`. If a node specified by `s` or `t` is not present in `G`, then that node is added as well. The new graph, `H`, is equivalent to `G`, but includes the new edge and any required new nodes.

`H = addedge(G,s,t,w)` also specifies weights, `w`, for the edges between `s` and `t`.

`H = addedge(G,EdgeTable)` adds edges with attributes specified by the table, `EdgeTable`. The `EdgeTable` input must be able to be concatenated with `G.Edges`.

Examples

Add Edges to Graph

Add two new edges to an existing graph. Since one of the new edges references a node that does not exist, `addedge` automatically adds the required fourth node to the graph.

```
G = graph([1 2],[2 3])
```

```
G 
  graph with properties:

    Edges: [2×1 table]
    Nodes: [3×0 table]
```

```
G = addedge(G,[2 1],[4 3])
```

```
G =
  graph with properties:

    Edges: [4×1 table]
    Nodes: [4×0 table]
```

Add Weighted Edges to Graph

Create a directed graph with weighted edges.

```
G = digraph({'A' 'B' 'C'}, {'D' 'C' 'D'}, [10 20 45])
```

```
G =
  digraph with properties:

    Edges: [3×2 table]
    Nodes: [4×1 table]
```

Add three new weighted edges to the graph. `addedge` also automatically adds any required new nodes to the graph.

```
G = addedge(G, {'A' 'D' 'E'}, {'E' 'B' 'D'}, [5 30 5])
```

```
G =
  digraph with properties:

    Edges: [6×2 table]
    Nodes: [5×1 table]
```

Add Edges with Attributes to Graph

Create a graph whose edges have the attributes `Weight` and `Power`. Use an edge table to create the graph.

```
EdgeTable = table([1 2; 2 3; 2 4; 2 5; 5 6; 5 7; 5 8], ...
    {'on','off','off','on','on','on','off'}',[10 20 20 10 10 10 20]', ...
    'VariableNames',{'EndNodes','Power','Weight'});
G = graph(EdgeTable)
```

```
G =
```

```
  graph with properties:

    Edges: [7×3 table]
    Nodes: [8×0 table]
```

Add two new edges to the graph by creating a smaller table that can be concatenated to `G.Edges`. Note that this smaller table must use the same order of variables as `G.Edges`.

```
NewEdges = table([5 9; 3 6], {'on' 'off'}', [10 20]', ...
    'VariableNames',{'EndNodes','Power','Weight'});
G = addedge(G,NewEdges)
```

```
G =
  graph with properties:

    Edges: [9×3 table]
    Nodes: [9×0 table]
```

View the new edge list of the graph, which includes the added edges.

```
G.Edges
```

```
ans = 9×3 table
    EndNodes    Power    Weight
    ________    _____    ______

    1    2      'on'     10
    2    3      'off'    20
    2    4      'off'    20
    2    5      'on'     10
    3    6      'off'    20
    5    6      'on'     10
    5    7      'on'     10
    5    8      'off'    20
    5    9      'on'     10
```

Input Arguments

G — Input graph

`graph` object | `digraph` object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

`s,t` — Node pairs (as separate arguments)

scalars | vectors | character vectors | cell arrays of character vectors

Node pairs, specified as separate arguments of scalars, vectors, character vectors, or cell arrays of character vectors. Similarly located elements in `s` and `t` specify the source and target nodes for an edge in the graph.

Example: `G = addedge(G, [1 2], [3 4])` adds two edges to the graph: one from node `1` to node `3`, and one from node `2` to node `4`.

Example: `G = addedge(G, {'a' 'a'; 'b' 'c'}, {'b' 'c'; 'c' 'e'})` adds four edges to the graph, the first of which goes from `'a'` to `'b'`.

`w` — Edge weights

scalar | vector | matrix

Edge weights, specified as a scalar, vector, or matrix.

- If `w` is a scalar or row vector, then it is scalar expanded to specify a weight for each edge in `s` and `t`.
- If `w` is a column vector, then it must have the same length as `s(:)` and `t(:)`.
- If `w` is a matrix, it must have the same number of rows as `s(:)` and `t(:)`.

Example: `G = addedge(G, [2 2], [4 5], [1 100]')` adds two edges with weights of `1` and `100`.

Data Types: `single` | `double`
Complex Number Support: Yes

`EdgeTable` — Edge attributes

table

Edge attributes, specified as a table. `EdgeTable` must be able to be concatenated with `G.Edges`:

- The first variable in `EdgeTable` must be `EndNodes`.
- For weighted graphs, `EdgeTable` must also contain a variable `Weight`.
- If the graph has other edge attributes, then `EdgeTable` must contain all of the same variables as `G.Edges` to ensure compatibility.
- The order of variables in `EdgeTable` must be the same as that of `G.Edges`.

Data Types: `table`

Output Arguments

`H` — Output graph

`graph` object | `digraph` object

Output graph, returned as a `graph` or `digraph` object.

For more information, see graph or digraph.

See Also

See Also

`addnode` | `digraph` | `graph` | `numedges` | `rmedge`

Topics

"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"

Introduced in R2015b

addnode

Add new node to graph

Syntax

```
H = addnode(G,nodeIDs)
H = addnode(G,numNodes)
H = addnode(G,NodeProps)
```

Description

`H = addnode(G,nodeIDs)` adds the nodes specified by `nodeIDs` to graph `G`. The node names in `nodeIDs` must not refer to nodes already present in `G`.

`H = addnode(G,numNodes)` adds a number of new nodes to `G` equal to `numNodes`. If `G` contains nodes with names, then the new nodes are assigned sequential names indicating their row placement in `G.Nodes.Name`. For example, `'Node5'` is located at `G.Nodes.Name(5)`.

`H = addnode(G,NodeProps)` adds new nodes to `G` with the node properties in `NodeProps`. One node is added for each row in `NodeProps`. The `NodeProps` table must be able to be concatenated to `G.Nodes`, so that the result is `H.Nodes = [G.Nodes; NodeProps]`.

Examples

Add Nodes to Graph

Add two nodes to a graph that does not have node names.

```
G = graph([1 2 3],[2 3 4])
```

```
G = 
  graph with properties:
```

```
    Edges: [3×1 table]
    Nodes: [4×0 table]
```

```
G = addnode(G,2)
```

```
G =
  graph with properties:

    Edges: [3×1 table]
    Nodes: [6×0 table]
```

Add node names to the graph, and then add five additional new nodes. The auto-generated names for the new nodes indicate their placement in `G.Nodes.Name`.

```
G.Nodes.Name = {'A' 'B' 'C' 'D' 'E' 'F'}'
```

```
G =
  graph with properties:

    Edges: [3×1 table]
    Nodes: [6×1 table]
```

```
G = addnode(G,5);
G.Nodes
```

```
ans = 11×1 table
      Name
    ________

    'A'
    'B'
    'C'
    'D'
    'E'
    'F'
    'Node7'
    'Node8'
    'Node9'
    'Node10'
    'Node11'
```

Add Named Nodes to Graph

Create a directed graph with named nodes, and then add two named nodes to the graph.

```
G = digraph({'A' 'B' 'C'},{'D' 'C' 'D'})
```

```
G = 
  digraph with properties:

    Edges: [3×1 table]
    Nodes: [4×1 table]
```

```
G = addnode(G,{'E' 'F'})
```

```
G = 
  digraph with properties:

    Edges: [3×1 table]
    Nodes: [6×1 table]
```

If the graph does not already have node names, then adding named nodes to the graph automatically generates names for the other nodes.

Create a directed graph without node names, and then add two named nodes to the graph.

```
H = digraph([1 2 3],[4 3 4])
```

```
H = 
  digraph with properties:

    Edges: [3×1 table]
    Nodes: [4×0 table]
```

```
H = addnode(H,{'E','F'});
H.Nodes
```

```
ans = 6×1 table
     Name
    _______

    'Node1'
    'Node2'
```

```
    'Node3'
    'Node4'
    'E'
    'F'
```

Add Nodes with Attributes to Graph

Create a graph whose nodes represent airports.

```
G = graph({'JFK' 'LAX'}, {'LAX' 'DEN'})
```

```
G = 
  graph with properties:

    Edges: [2×1 table]
    Nodes: [3×1 table]
```

Add a node attribute to indicate whether each airport has free WIFI.

```
G.Nodes.WIFI = [false true true]';
G.Nodes
```

```
ans = 3×2 table
    Name     WIFI 
    _____    _____

    'JFK'    false
    'LAX'    true 
    'DEN'    true 
```

Add two new nodes to the graph by creating a table, `NodeProps`, containing the node name and WIFI status of each new node. Use `addnode` to concatenate `NodeProps` to `G.Nodes`.

```
NodeProps = table({'ATL' 'ANC'}', [false true]', ...
    'VariableNames', {'Name' 'WIFI'});
G = addnode(G, NodeProps);
```

View the modified node table.

```
G.Nodes
```

```
ans = 5×2 table
    Name     WIFI
    _____    _____

    'JFK'    false
    'LAX'    true
    'DEN'    true
    'ATL'    false
    'ANC'    true
```

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: G = digraph([1 2],[2 3])

nodeIDs — Node names

character vector | cell array of character vectors

Node names, specified as a character vector or cell array of character vectors.

Data Types: char | cell

numNodes — Number of nodes to add

nonnegative numeric scalar

Number of nodes to add, specified as a nonnegative numeric scalar.

NodeProps — Node attributes

table

Node attributes, specified as a table.

Data Types: table

Output Arguments

H — Output graph
graph object | digraph object

Output graph, returned as a graph or digraph object.

For more information, see graph or digraph.

See Also

See Also
addedge | graph | numnodes | rmnode

Topics
"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"

Introduced in R2015b

adjacency

Graph adjacency matrix

Syntax

```
A = adjacency(G)
```

Description

`A = adjacency(G)` returns the sparse adjacency matrix for graph `G`. If `(i,j)` is an edge in `G`, then `A(i,j) = 1`. Otherwise, `A(i,j) = 0`.

Examples

Adjacency Matrix of Graph

Create a directed graph using an edge list, and then find the equivalent adjacency matrix representation of the graph. The adjacency matrix is returned as a sparse matrix.

```
s = [1 1 1 2 2 3];
t = [2 3 4 5 6 7];
G = digraph(s,t)
```

```
G 
  digraph with properties:

    Edges: [6×1 table]
    Nodes: [7×0 table]
```

```
A = adjacency(G)
```

```
A 
   (1,2)        1
   (1,3)        1
   (1,4)        1
   (2,5)        1
   (2,6)        1
   (3,7)        1
```

Adjacency Matrix of Weighted Graph

Create an undirected graph using an upper triangular adjacency matrix. When constructing a graph with an adjacency matrix, the nonzero values in the matrix correspond to edge weights.

```
A = [0 5 3 0;0 0 1 2; 0 0 0 11; 0 0 0 0]
```

```
A =

     0     5     3     0
     0     0     1     2
     0     0     0    11
     0     0     0     0
```

```
G = graph(A,'upper')
```

```
G =
  graph with properties:

    Edges: [5×2 table]
    Nodes: [4×0 table]
```

```
G.Edges
```

```
ans = 5×2 table
    EndNodes    Weight
    ________    ______

    1     2       5
    1     3       3
    2     3       1
    2     4       2
    3     4      11
```

Use `adjacency` to return the adjacency matrix of the graph. Regardless of the form of adjacency matrix used to construct the graph, the `adjacency` function always returns a symmetric and sparse adjacency matrix containing only 1s and 0s.

```
B = adjacency(G)
```

```
B =
   (2,1)        1
   (3,1)        1
   (1,2)        1
   (3,2)        1
   (4,2)        1
   (1,3)        1
   (2,3)        1
   (4,3)        1
   (2,4)        1
   (3,4)        1
```

Reconstruct Weighted Adjacency Matrix

Create a weighted graph.

```
G = digraph([1 1 1 2],[2 3 4 4],[5 6 7 8])
```

```
G =
  digraph with properties:

    Edges: [4×2 table]
    Nodes: [4×0 table]
```

Find the adjacency matrix of the graph.

```
A = adjacency(G)
```

```
A =
   (1,2)        1
   (1,3)        1
   (1,4)        1
   (2,4)        1
```

This form of the adjacency matrix does not include the edge weights in the graph.

Use the `sparse` function to construct a weighted adjacency matrix representation of the graph.

```
nn = numnodes(G);
[s,t] = findedge(G);
A = sparse(s,t,G.Edges.Weight,nn,nn)
```

```
A =
   (1,2)        5
   (1,3)        6
   (1,4)        7
   (2,4)        8
```

Preview a full storage version of the matrix.

```
full(A)
```

```
ans =

     0     5     6     7
     0     0     0     8
     0     0     0     0
     0     0     0     0
```

This reconstruction of the weighted adjacency matrix also can be accomplished with undirected graphs. In that case, the procedure is similar, but has one final step:

```
A = A + A.' - diag(diag(A));
```

Input Arguments

G — Input graph

`graph` object | `digraph` object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

Output Arguments

A — Adjacency matrix

sparse matrix

Adjacency matrix, returned as a sparse matrix. The size of `A` is `numnodes(G)`-by-`numnodes(G)`.

See Also

See Also

`digraph` | `graph` | `incidence` | `laplacian`

Topics

graph
digraph

Introduced in R2015b

bctree

Block-cut tree graph

Syntax

```
tree = bctree(G)
[tree,ind] = bctree(G)
```

Description

`tree = bctree(G)` returns the block-cut tree of graph `G`, such that each node in `tree` represents either a biconnected component or cut vertex of `G`. A node representing a cut vertex is connected to all nodes representing biconnected components that contain that cut vertex.

`[tree,ind] = bctree(G)` also returns a vector of numeric node indices mapping the nodes of `G` into the nodes of `tree`.

Examples

Compute Block-Cut Tree of Graph

Compute the block-cut tree of a graph, view the resulting node properties, and then highlight the cut vertices in the graph plot.

Create and plot a graph.

```
s = [1 1 2 2 3 4 4 5 6 6 7 7 8];
t = [2 3 3 4 4 5 7 6 7 10 8 9 9];
G = graph(s,t);
p = plot(G);
```

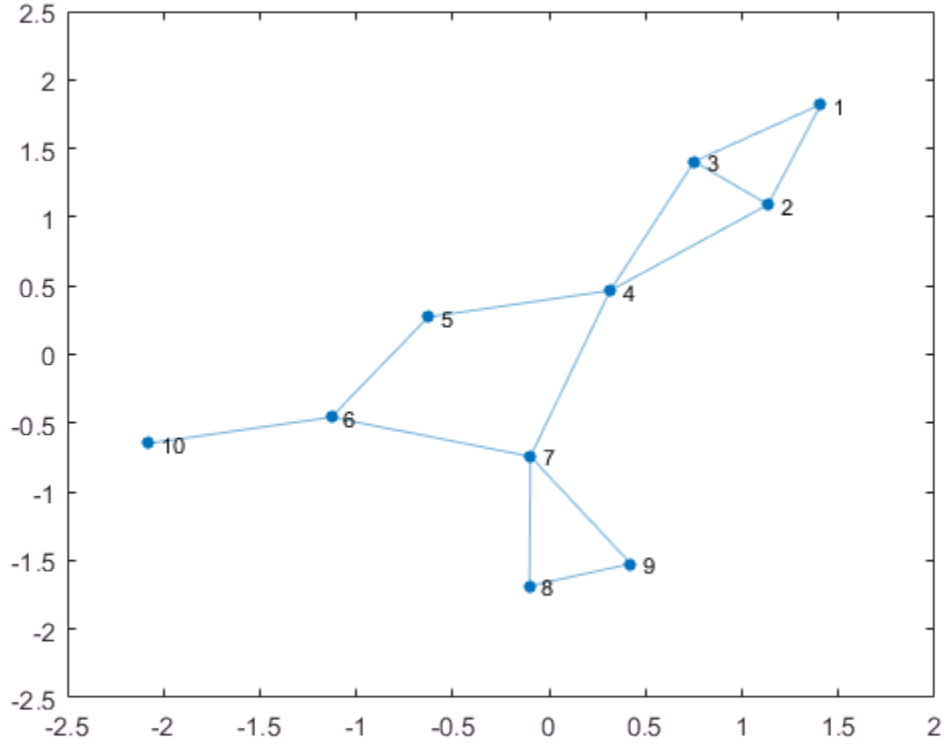

Compute the block-cut tree of the graph and view the node properties.

```
tree = bctree(G);
tree.Nodes
```

```
ans = 7×3 table
    IsComponent    ComponentIndex    CutVertexIndex
    ___________    ______________    ______________

    true           1                 0
    true           2                 0
    true           3                 0
    true           4                 0
    false          0                 4
```

```
    false          0                 6
    false          0                 7
```

Plot the block-cut tree using red diamond markers for the nodes that represent cut vertices. The circular nodes represent the biconnected components in the original graph.

```
p2 = plot(tree,'MarkerSize',9);
highlight(p2,5:7,'Marker','d','NodeColor','r')
```

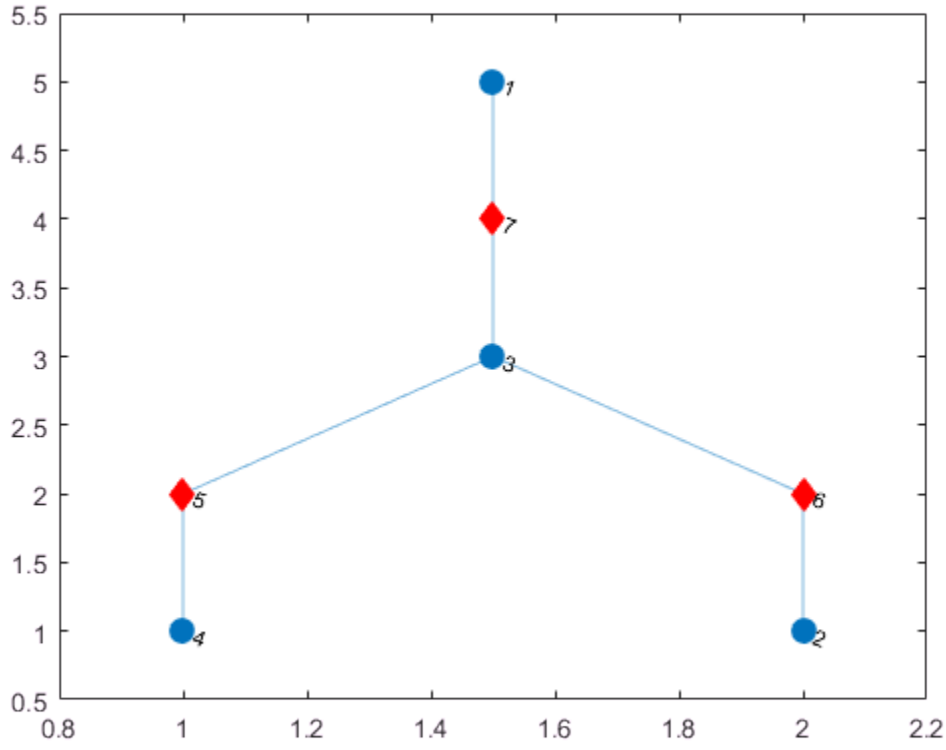

Return Node Indices for Block-Cut Tree

Create and plot a graph.

```
s = [1 1 2 2 3 4 4 5 6 6 7 7 8];
t = [2 3 3 4 4 5 7 6 7 10 8 9 9];
G = graph(s,t);
p = plot(G);
```

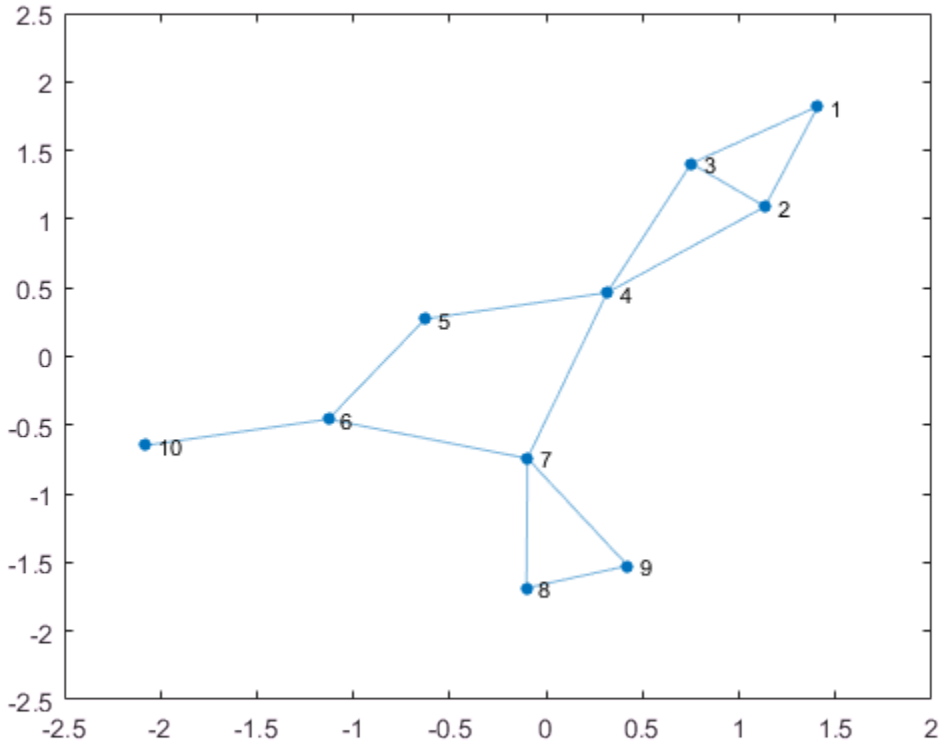

Compute the block-cut tree `tr` of the graph, and specify a second output `ix` to return the node indices.

```
[tr,ix] = bctree(G)
```

```
tr =
  graph with properties:
```

```
    Edges: [6×1 table]
    Nodes: [7×3 table]


ix =

     4     4     4     5     3     6     7     1     1     2
```

Each index `ix(j)` indicates the node in the block-cut tree that represents node `j` in the input graph. For example, node 4 in `tr` represents a component in `G` that contains nodes 1, 2, and 3, so the first three entries in `ix` are all 4.

Input Arguments

`G` — Input graph

`graph` object

Input graph, specified as a `graph` object. Use the `graph` function to create an undirected graph object. For more information, see graph.

Example: `G = graph(1,2)`

Output Arguments

`tree` — Block-cut tree graph

`graph` object

Block-cut tree graph, returned as a `graph` object. `tree` contains a node for each cut vertex in `G` and a node for each biconnected component in `G`. The nodes table `tree.Nodes` contains additional node attributes to describe what each node represents:

- `tree.Nodes.IsComponent(i)` — Value equal to logical `1` (`true`) if node `i` represents a biconnected component. Otherwise, the value is equal to and logical `0` (`false`).
- `tree.Nodes.ComponentIndex(i)` — Index indicating the component represented by node `i`. The value is zero if node `i` represents a cut vertex.

- `tree.Nodes.CutVertexIndex(i)` — Index indicating the cut vertex represented by node `i`. The value is zero if node `i` represents a biconnected component.

`ind` — Node indices
vector

Node indices, returned as a numeric vector. `ind(i)` is the node in the output graph `tree` that represents node `i` in the input graph `G`:

- If node `i` is a cut vertex in graph `G`, then `ind(i)` is the associated node in `tree`.
- If node `i` is not a cut vertex, but belongs to one of the biconnected components in graph `G`, then `ind(i)` is the node in `tree` representing that biconnected component.
- If node `i` is an isolated node in graph `G`, then `ind(i)` is zero.

Definitions

Biconnected Components

A biconnected component of a graph is a maximally biconnected subgraph. A graph is biconnected if it does not contain any cut vertices.

Decomposing a graph into its biconnected components helps to measure how well-connected the graph is. You can decompose any connected graph into a tree of biconnected components, called the *block-cut tree*. The blocks in the tree are attached at shared vertices, which are the cut vertices.

The illustration depicts:

- (a) An undirected graph with 11 nodes.
- (b) Five biconnected components of the graph, with the cut vertices of the original graph colored for each component to which they belong.
- (c) Block-cut tree of the graph, which contains a node for each biconnected component (as large circles) and a node for each cut vertex (as smaller multicolored circles). In the block-cut tree, an edge connects each cut vertex to each component to which it belongs.

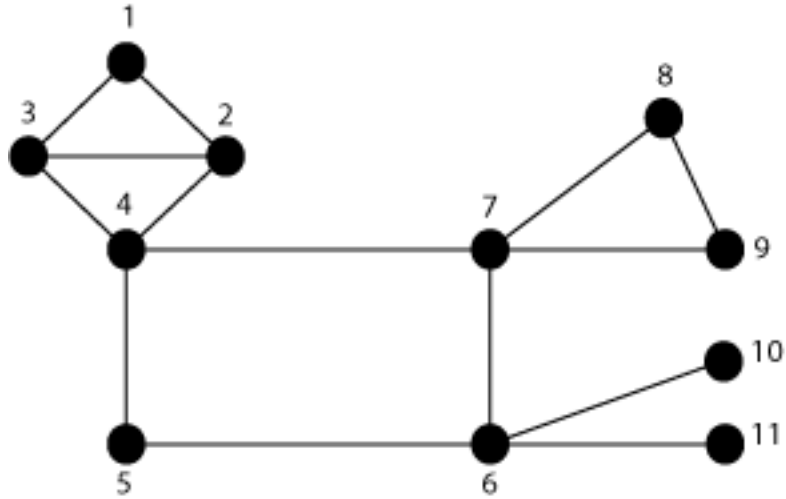

(a)

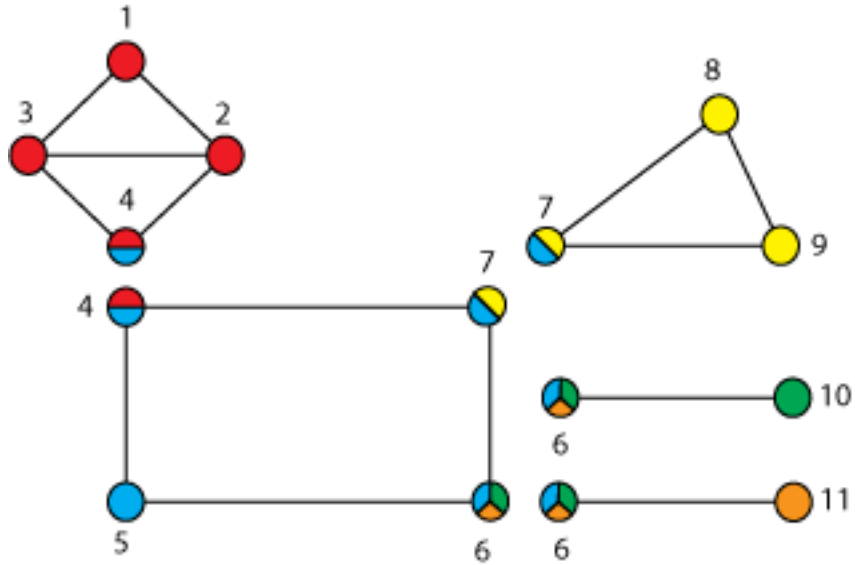

(b)

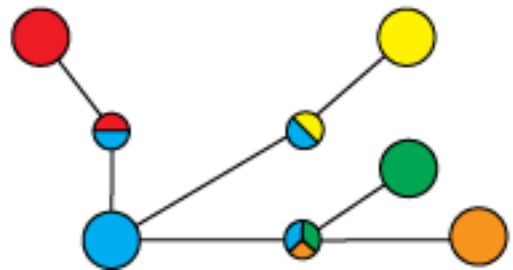

(c)

1-3882

Cut Vertices

Also known as *articulation points*, cut vertices are graph nodes whose removal increases the number of connected components. In the previous illustration, the cut vertices are those nodes with more than one color: nodes 4, 6, and 7.

See Also

See Also

`biconncomp` | `condensation`

Topics

"Directed and Undirected Graphs"
"Visualize Breadth-First and Depth-First Search"

Introduced in R2016b

bfsearch

Breadth-first graph search

Syntax

```
v = bfsearch(G,s)
T = bfsearch(G,s,events)
T = bfsearch( ___ ,'Restart',true)
```

Description

`v = bfsearch(G,s)` applies breadth-first search to graph `G` starting at node `s`. The result is a vector of node IDs in order of their discovery.

`T = bfsearch(G,s,events)` customizes the output of the breadth-first search by flagging one or more search events. For example, `T = bfsearch(G,s,'allevents')` returns a table containing all flagged events, and `X = bfsearch(G,s,'edgetonew')` returns a matrix or cell array of edges.

`T = bfsearch( ___ ,'Restart',true)` restarts the search if no new nodes are reachable from the discovered nodes. You can use any of the input argument combinations in previous syntaxes. This option ensures that the breadth-first search reaches all nodes and edges in the graph, even if they are not reachable from the starting node, `s`.

Examples

Perform Breadth-First Graph Search

Create and plot a graph.

```
s = [1 1 1 1 2 2 2 2 2 2 2 2 2 2 15 15 15 15 15];
t = [3 5 4 2 14 6 11 12 13 10 7 9 8 15 16 17 19 18 20];
G = graph(s,t);
plot(G)
```

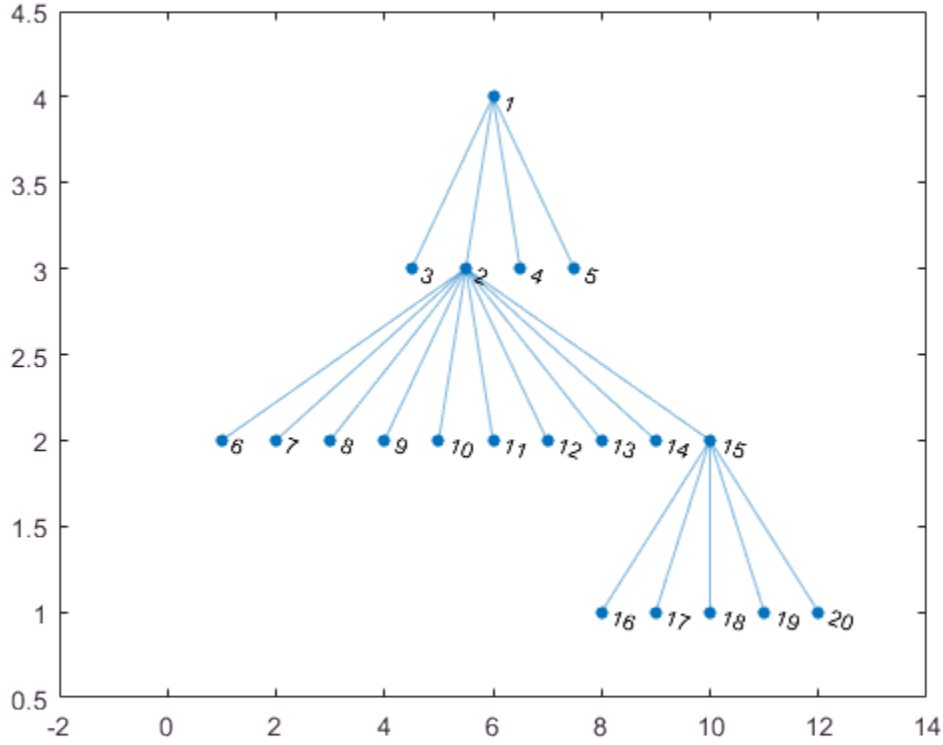

Perform a breadth-first search of the graph starting at node 2. The result indicates the order of node discovery.

```
v = bfsearch(G,2)
```

```
v =

     2
     1
     6
     7
     8
     9
    10
```

```
11
12
13
```

Breadth-First Graph Search with All Events

Create and plot a directed graph.

```
s = [1 1 1 2 3 3 3 4 6];
t = [2 4 5 5 6 7 4 1 4];
G = digraph(s,t);
plot(G)
```

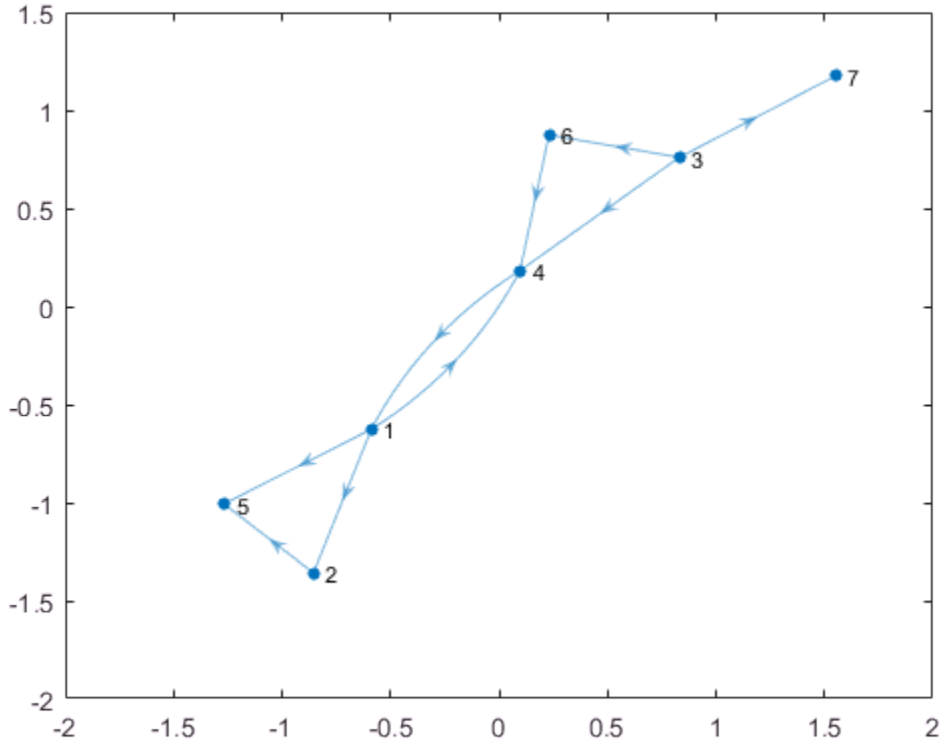

Perform a breadth-first search on the graph starting at node 1. Specify `'allevents'` to return a table containing all of the events in the algorithm.

```
T = bfsearch(G,1,'allevents')
```

```
T = 14×3 table
          Event           Node       Edge
    ________________      ____    __________

    startnode               1     NaN    NaN
    discovernode            1     NaN    NaN
    edgetonew             NaN       1      2
    discovernode            2     NaN    NaN
    edgetonew             NaN       1      4
    discovernode            4     NaN    NaN
    edgetonew             NaN       1      5
    discovernode            5     NaN    NaN
    finishnode              1     NaN    NaN
    edgetodiscovered      NaN       2      5
    finishnode              2     NaN    NaN
    edgetofinished        NaN       4      1
    finishnode              4     NaN    NaN
    finishnode              5     NaN    NaN
```

To follow the steps in the algorithm, read the events in the table from top to bottom. For example:

1. The algorithm begins at node 1
2. An edge is discovered between node 1 and node 2
3. Node 2 is discovered
4. and so on...

Breadth-First Graph Search with Multiple Components

Perform a breadth-first search of a graph with multiple components, and then highlight the graph nodes and edges based on the search results.

Create and plot a directed graph. This graph has two weakly connected components.

```
s = [1 1 2 2 2 3 4 7 8 8 8 8];
t = [3 4 7 5 6 2 6 2 9 10 11 12];
G = digraph(s,t);
p = plot(G,'Layout','layered');
```

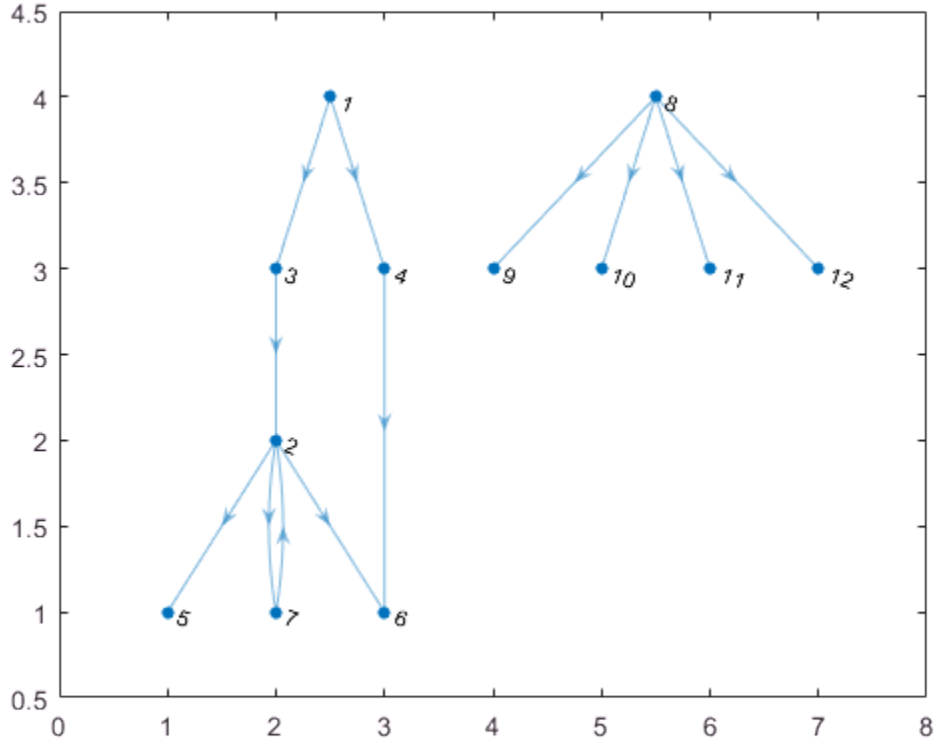


```
c = conncomp(G,'Type','weak')
```

```
c =

     1     1     1     1     1     1     1     2     2     2     2     2
```

Perform a breadth-first search of the graph starting at node 2, and flag the `'edgetonew'`, `'edgetofinished'`, and `'startnode'` events. Specify `Restart` as `true` to make the search restart whenever there are remaining nodes that cannot be reached.

```
events = {'edgetonew','edgetofinished','startnode'};
T = bfsearch(G,2,events,'Restart',true)
```

```
T = 15×3 table
        Event          Node       Edge
    _______________    ____    __________

    startnode           2     NaN    NaN
    edgetonew         NaN       2      5
    edgetonew         NaN       2      6
    edgetonew         NaN       2      7
    edgetofinished    NaN       7      2
    startnode           1     NaN    NaN
    edgetonew         NaN       1      3
    edgetonew         NaN       1      4
    edgetofinished    NaN       3      2
    edgetofinished    NaN       4      6
    startnode           8     NaN    NaN
    edgetonew         NaN       8      9
    edgetonew         NaN       8     10
    edgetonew         NaN       8     11
    edgetonew         NaN       8     12
```

When `Restart` is `true`, the `'startnode'` event returns information about where and when the algorithm restarts the search.

Highlight the graph based on event:

- Color the starting nodes red.
- Green edges are for `'edgetonew'`
- Black edges are for `'edgetofinished'`

```
edgenew = T.Edge(T.Event == 'edgetonew',:);
edgefin = T.Edge(T.Event == 'edgetofinished',:);

highlight(p,edgenew(:,1),edgenew(:,2),'EdgeColor','g')
highlight(p,edgefin(:,1),edgefin(:,2),'EdgeColor','k')
highlight(p,T.Node(~isnan(T.Node)),'NodeColor','r')
```

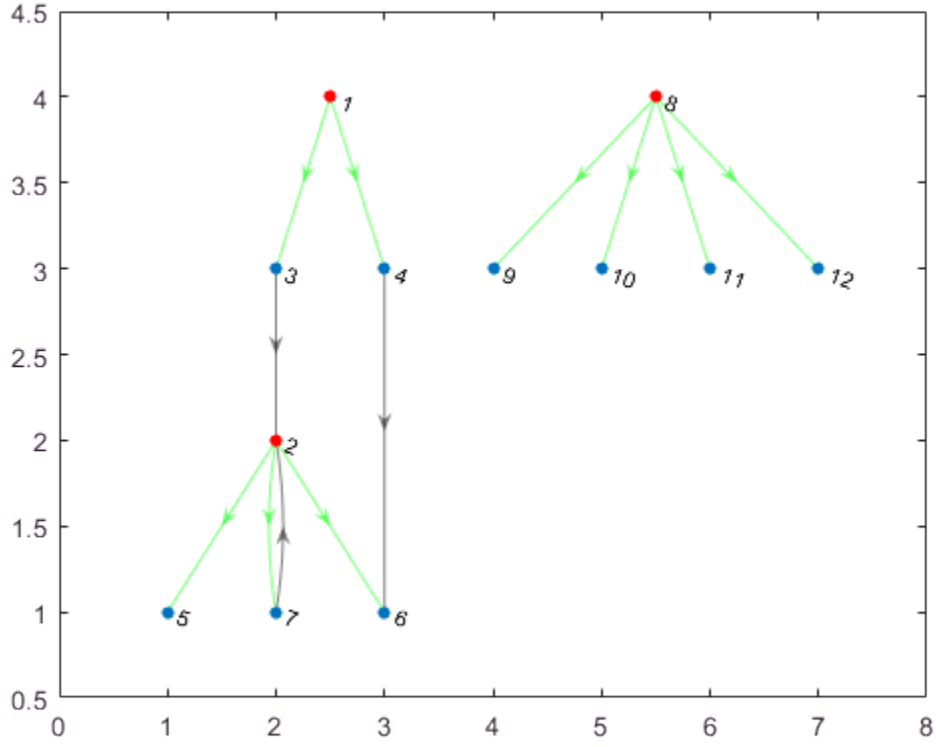

Determine if Graph is Bipartite

Use breadth-first search to determine that a graph is bipartite, and return the relevant partitions. A bipartite graph is a graph that has nodes you can divide into two sets, A and B, with each edge in the graph connecting a node in A to a node in B.

Create and plot a directed graph.

```
s = [1 1 1 1 2 2 4 5 6 7 8];
t = [2 3 6 8 5 10 6 6 10 3 10];
g = digraph(s,t);
plot(g);
```

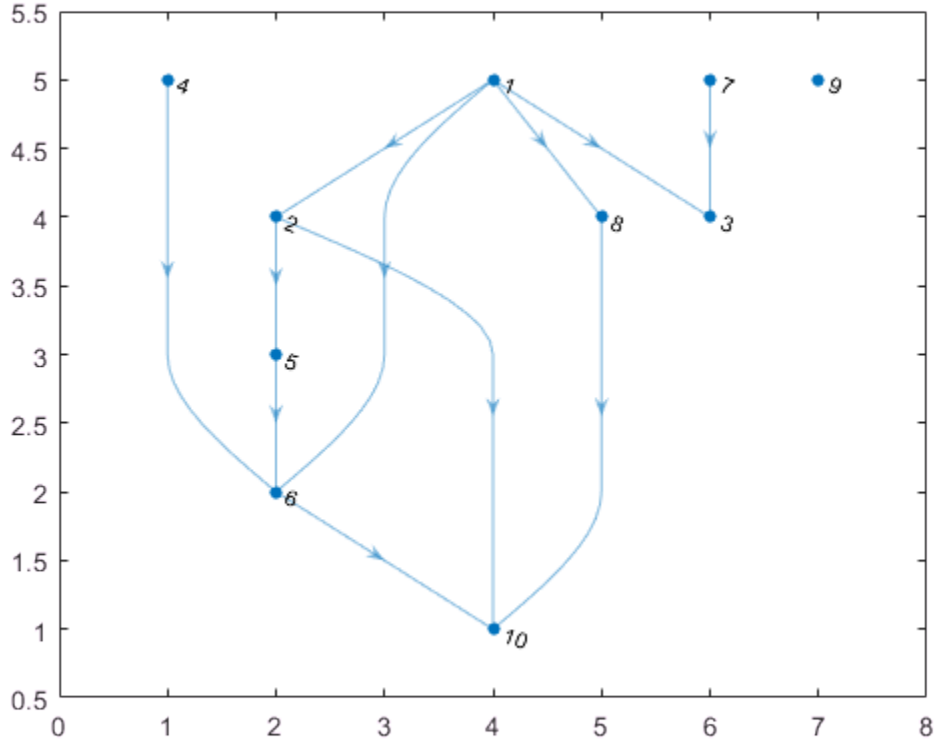

Use a breath-first search on the graph to determine if it is bipartite, and if so, return the relevant partitions.

```
events = {'edgetonew', 'edgetodiscovered', 'edgetofinished'};
T = bfsearch(g, 1, events, 'Restart', true);
partitions = false(1, numnodes(g));
is_bipart = true;

for ii=1:size(T, 1)
    if T.Event(ii) == 'edgetonew'
        partitions(T.Edge(ii, 2)) = ~partitions(T.Edge(ii, 1));
    else
        if partitions(T.Edge(ii, 1)) == partitions(T.Edge(ii, 2))
            is_bipart = false;
```

```
            break;
        end
    end
end
```

```
is_bipart
```

```
is_bipart = logical
   1
```

Since `g` is bipartite, the `partitions` variable contains the information about which partition each node belongs to.

Plot the bipartite graph with the `'layered'` layout, using the `partitions` variable to specify the source nodes that appear in the first layer.

```
partitions
```

```
partitions = 1×10 logical array
   0   1   1   0   0   1   0   1   0   0
```

```
plot(g, 'Layout', 'layered', 'Source', find(partitions));
```

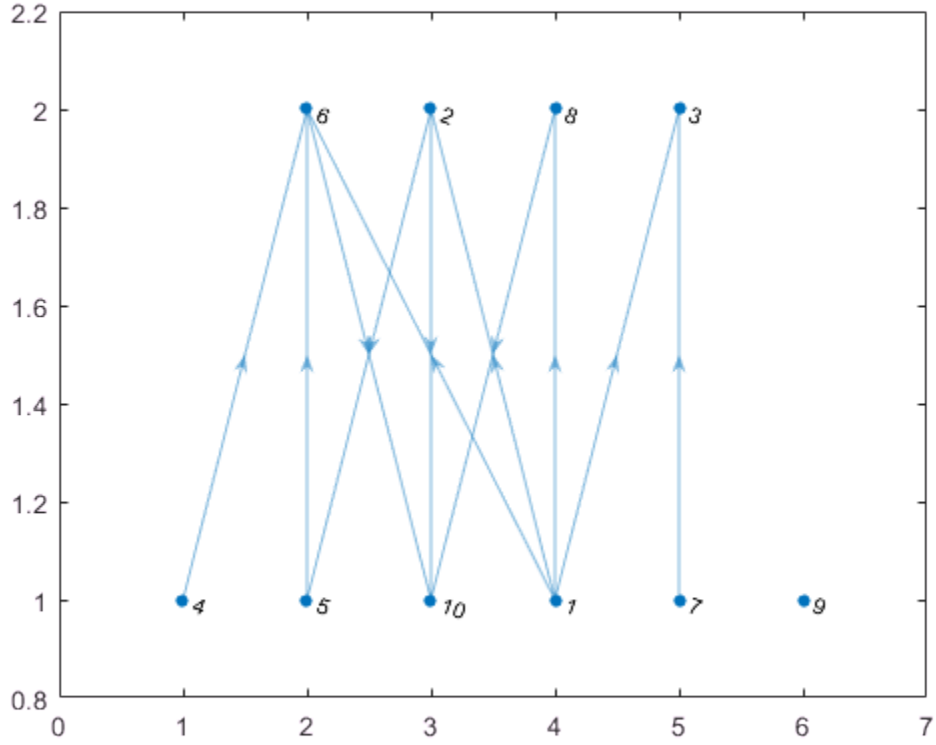

- "Visualize Breadth-First and Depth-First Search"

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

s — Starting node

nonnegative scalar integer | character vector

Starting node, specified as either a nonnegative scalar integer between `1` and `numnodes(G)`, or a character vector containing a node name.

Example: `bfsearch(G,1)`

events — Flagged search events

`'discovernode'` (default) | `'startnode'` | `'finishnode'` | `'edgetonew'` | `'edgetodiscovered'` | `'edgetofinished'` | `'allevents'` | cell array

Flagged search events, specified as one of the options in the following table.

- To flag single events, use the flag names.
- To flag a subset of events, put two or more flag names into a cell array.
- To flag all events, use `'allevents'`.

Note: Depending on the value of `events`, the output of `bfsearch` varies. See the last column in the following table for information about the output returned by each option.

Value of `events`	Description	Output
`'discovernode'` (default)	A new node has been discovered.	Return a vector of node IDs: • If `s` is a numeric node index, then the vector contains numeric node indices. • If `s` is a node name, then the vector is a cell array containing node names.
`'finishnode'`	All outgoing edges from the node have been visited.	
`'startnode'`	This flag indicates the starting node in the search. If `'Restart'` is `true`, then `'startnode'` flags the starting node each time the search restarts.	

Value of events	Description	Output
`'edgetonew'`	Edge connects to an undiscovered node.	Return a matrix or cell array of size `N`-by-`2` that specifies the end nodes of edges in the graph: • If `s` is a numeric node index, then the matrix contains numeric node indices. • If `s` is a node name, then the matrix is a cell array containing node names.
`'edgetodiscovered'`	Edge connects to a previously discovered node.	
`'edgetofinished'`	Edge connects to a finished node.	

Value of `events`	Description	Output
cell array	Specify two or more flags in a cell array to only flag those events during the search.	Return a table, `T`, which contains the variables `T.Event`, `T.Node`, and `T.Edge`: • `T.Event` is a categorical vector containing the flags in order of their occurrence. • `T.Node` contains the node ID of the corresponding node for the events `'discovernode'`, `'finishnode'`, and `'startnode'`. • `T.Edge` contains the corresponding edge for the events `'edgetonew'`, `'edgetodiscovered'`, and `'edgetofinished'`. • Unused elements of `T.Node` and `T.Edge` are set to `NaN`. • If `s` is a numeric node index, then `T.Node` and `T.Edge` contain numeric node indices. • If `s` is a node name, then `T.Node` and `T.Edge` are cell arrays containing node names.
`'allevents'`	All events are flagged.	

Example: `v = bfsearch(G,3)` begins the search at the third node and returns a vector, `v`, containing the nodes in order of discovery. This is the same as `v = bfsearch(G,3,'discovernode')`.

Example: `X = bfsearch(G,'A','edgetonew')` begins at the node named `'A'` and returns a cell array, `X`, indicating each of the edges that connects to an undiscovered node during the search.

Example: `T = bfsearch(G,s,{'discovernode','finishnode'})` returns a table, `T`, but only flags when new nodes are discovered or when a node is marked finished.

Example: `T = bfsearch(G,s,'allevents')` flags all search events and returns a table, `T`.

Data Types: `char` | `cell`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `v = bfsearch(G,s,'Restart',true)`

`'Restart'` — Toggle to restart search

`false` (default) | `true`

Toggle to restart search, specified as `false` (default) or `true`. This option is useful if the graph contains nodes that are unreachable from the starting node. If `'Restart'` is `true`, then the search restarts whenever undiscovered nodes remain that are unreachable from the discovered nodes. The new start node is the node with smallest index that is still undiscovered. The restarting process repeats until `bfsearch` discovers all nodes.

`'Restart'` is `false` by default, so that the search only visits nodes that are reachable from the starting node.

When `'Restart'` is `true`, the `'discovernode'` and `'finishnode'` events occur once for each node in the graph. Also, each edge in the graph is flagged once by `'edgetonew'`, `'edgetodiscovered'`, or `'edgetofinished'`. The edges flagged by `'edgetonew'` form one or more trees.

Example: `T = bfsearch(graph([1 3],[2 4]),1,'Restart',true)` searches both of the connected components in the graph.

Data Types: `logical`

Output Arguments

v — Node IDs

numeric column vector | cell vector

Node IDs, returned in one of the following formats:

- If you use a numeric node ID to specify the starting node, `s`, then `v` is a numeric column vector of node indices.
- If `s` is a character vector containing a node name, then `v` is a cell vector containing node names.

The node IDs in `v` reflect the order of discovery by the breadth-first graph search.

T — Search results

table | vector | matrix | cell array of node names

Search results, returned in one of the following formats:

- If `events` is not specified or is `'discovernode'`, `'finishnode'`, or `'startnode'`, then `T` is a vector of node IDs similar to `v`.
- If `events` is `'edgetonew'`, `'edgetodiscovered'`, or `'edgetofinished'`, then `T` is a matrix or cell array of size `N`-by-`2` indicating the source and target nodes for each relevant edge.
- If `events` is a cell array of search events or `'allevents'`, then `T` is a table containing the flagged search events. The table contains the search event flags in `T.Event`, relevant node IDs in `T.Node`, and relevant edges in `T.Edge`.

In all cases:

- The order of the elements or rows of `T` indicates their order of occurrence during the search.
- If you specify `s` as a numeric node ID, then `T` also refers to nodes using their numeric IDs.
- If you specify `s` as a node name, then `T` also refers to nodes using their names.

Tips

- `dfsearch` and `bfsearch` treat undirected graphs the same as directed graphs. An undirected edge between nodes `s` and `t` is treated like two directed edges, one from `s` to `t` and one from `t` to `s`.

Algorithms

The Breadth-First search algorithm begins at the starting node, `s`, and inspects all of its neighboring nodes in order of their node index. Then for each of those neighbors, it visits their unvisited neighbors in order. The algorithm continues until all nodes that are reachable from the starting node have been visited.

In pseudo-code, the algorithm can be written as:

```
Event discovernode(S)
NodeList = {S}

WHILE NodeList is not empty

  C = NodeList{1}
  Remove first element from NodeList

  FOR node N from successors of node C
    Event edgetonew(C,N), edgetodiscovered(C,N) or edgetofinished(C,N) depending on the
    IF event was edgetonew
      Event discovernode(N)
      Append N to the end of NodeList
    END
  END

  Event finish(C)
END
```

`bfsearch` can return flags to describe the different events in the algorithm, such as when a new node is discovered or when all of the outgoing edges of a node have been visited. The event flags are listed here.

Event Flag	Event Description
`'discovernode'`	A new node has been discovered.

Event Flag	Event Description
`'finishnode'`	All outgoing edges from the node have been visited.
`'startnode'`	This flag indicates the starting node in the search.
`'edgetonew'`	Edge connects to an undiscovered node
`'edgetodiscovered'`	Edge connects to a previously discovered node
`'edgetofinished'`	Edge connects to a finished node

For more information, see the input argument description for `events`.

Note: In cases where the input graph contains nodes that are unreachable from the starting node, the `'Restart'` option provides a way to make the search visit every node in the graph. In that case, the `'startnode'` event indicates the starting node each time the search restarts.

See Also

See Also

`conncomp` | `dfsearch` | `digraph` | `graph`

Topics

"Visualize Breadth-First and Depth-First Search"

Introduced in R2015b

biconncomp

Biconnected graph components

Syntax

```
bins = biconncomp(G)
bins = biconncomp(G,'OutputForm',form)
[bins,iC] = biconncomp( ___ )
```

Description

`bins = biconncomp(G)` returns the biconnected components of graph `G` as bins. The bin numbers indicate which biconnected component each edge in the graph belongs to. Each edge in `G` belongs to a single biconnected component, whereas the nodes in `G` can belong to more than one biconnected component. Two nodes belong to the same biconnected component if removing any one node from the graph does not disconnect them.

`bins = biconncomp(G,'OutputForm',form)`, where `form` is `'cell'`, returns the output as a cell array such that `bins{j}` contains the node IDs of all nodes in component `j`. The default for `form` is `'vector'`.

`[bins,iC] = biconncomp( ___ )` additionally returns the node indices `iC` indicating which nodes are cut vertices (also called articulation points).

Examples

Highlight Biconnected Components

Create and plot a graph. Color the edges based on which biconnected component each edge belongs to.

```
s = [1 1 2 2 3 4 4 5 6 6 7 7 8];
t = [2 3 3 4 4 5 7 6 7 10 8 9 9];
```

```
G = graph(s,t);
p = plot(G,'LineWidth',2);
```

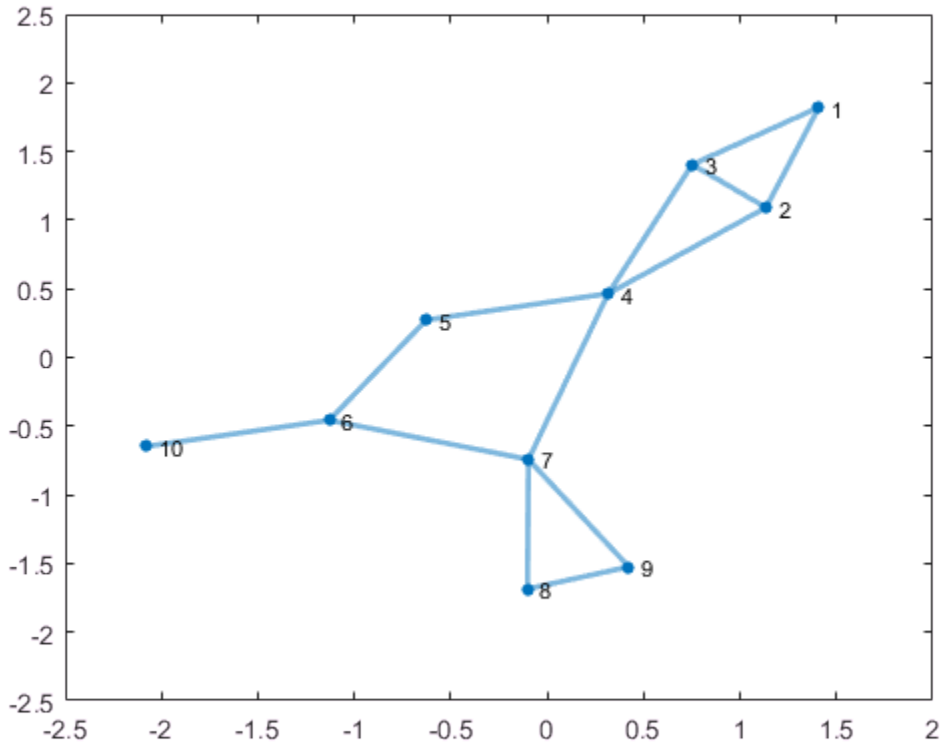


```
p.EdgeCData =  biconncomp(G);
```

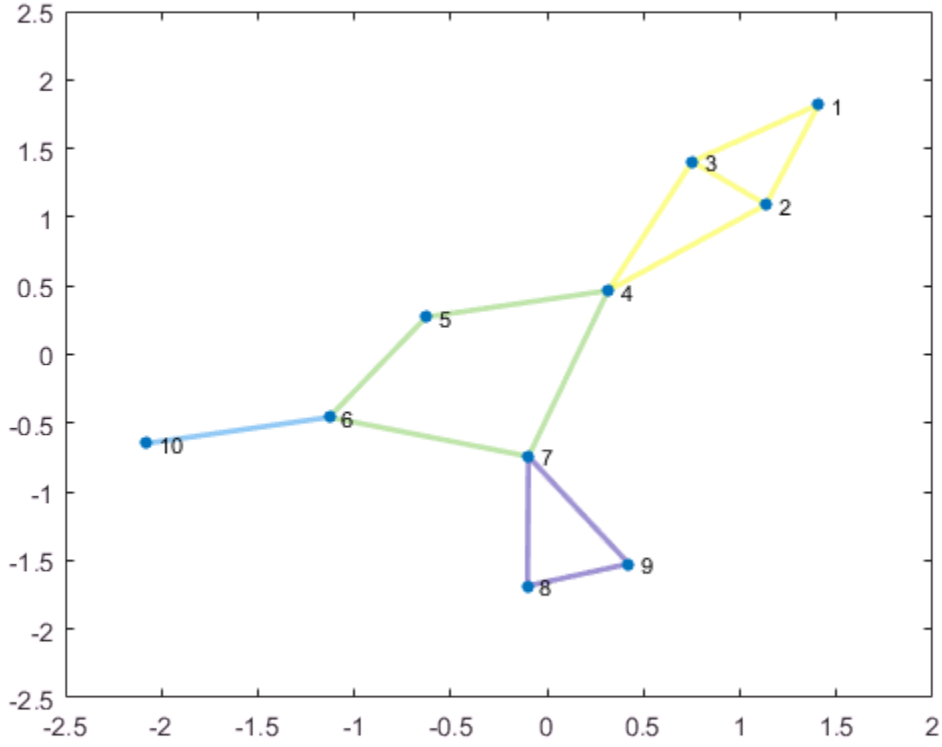

Extract Biconnected Components as Subgraphs

This example shows how to extract the biconnected components from a graph as subgraphs, and then label the nodes in each subgraph using the node indices in the original graph.

Create and plot a graph.

```
s = [1 1 2 2 3 4 4 5 6 6 7 7 8];
t = [2 3 3 4 4 5 7 6 7 10 8 9 9];
G = graph(s,t);
plot(G)
```

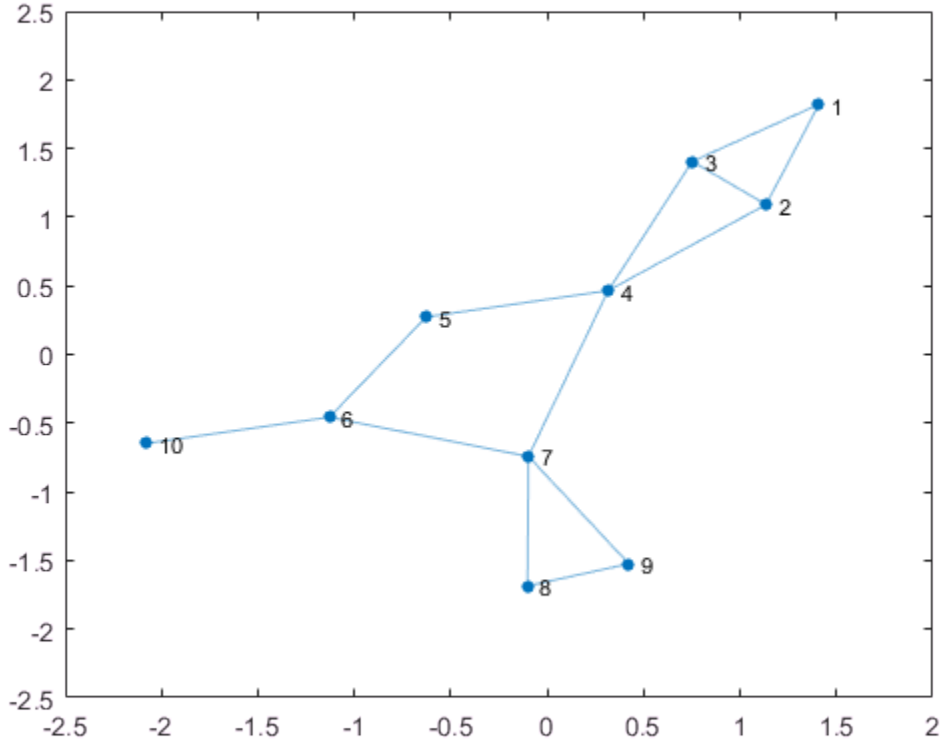

Group the graph nodes into bins based on which biconnected component(s) each node belongs to. Then, loop through each of the bins and extract a subgraph for each biconnected component. Label the nodes in each subgraph using their original node indices.

```
bincell = biconncomp(G, 'OutputForm', 'cell');
n = length(bincell);

for ii = 1:n
    subplot(2,2,ii)
    plot(subgraph(G, bincell{ii}), 'NodeLabel', bincell{ii});
end
```

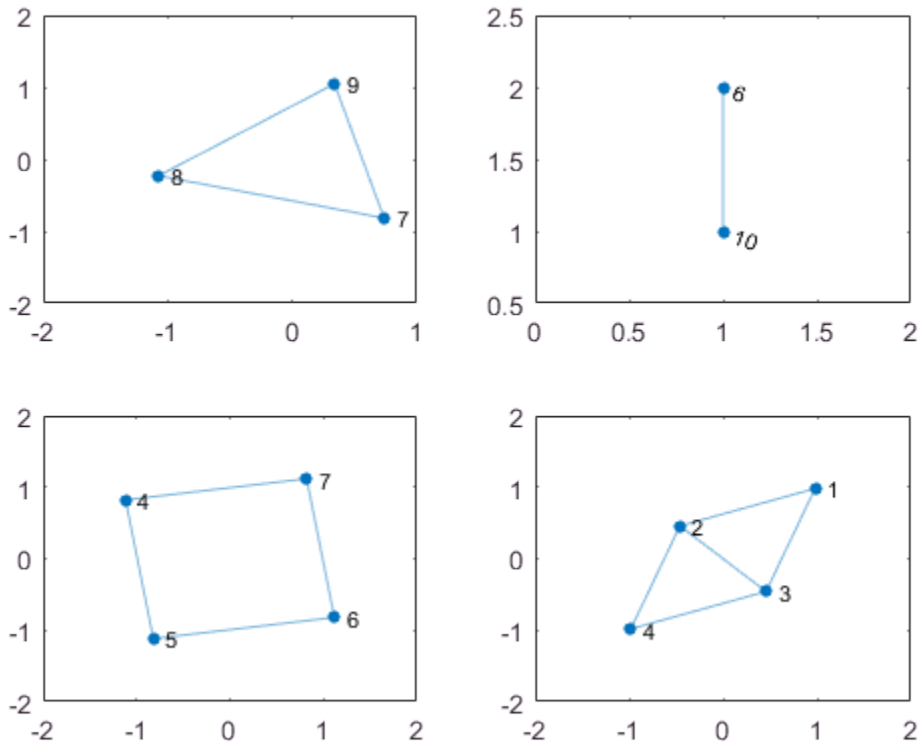

Identify Cut Vertices

Identify the cut vertices in a graph and then highlight those vertices in the graph plot.

Create and plot a graph. Calculate which biconnected component each graph edge belongs to, and specify a second output to return a vector identifying the cut vertices.

```
s = [1 1 2 2 3 4 4 5 6 6 7 7 8];
t = [2 3 3 4 4 5 7 6 7 10 8 9 9];
G = graph(s,t);
p = plot(G);
```

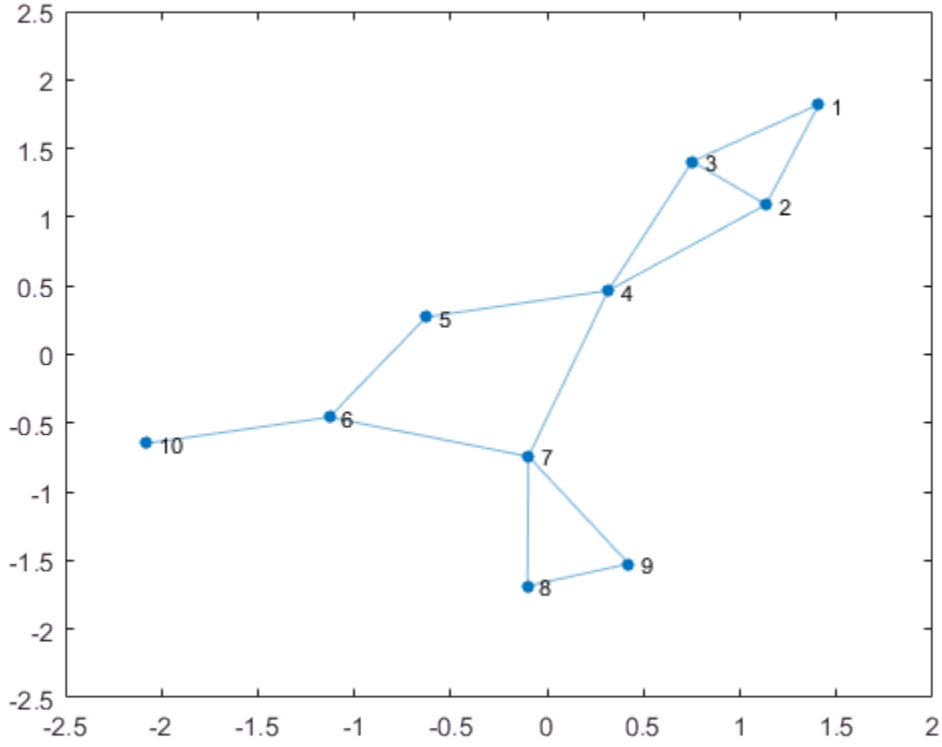


```
[edgebins,iC] = biconncomp(G)
```

```
edgebins =

     4     4     4     4     4     3     3     3     3     2     1     1     1


iC =

     4     6     7
```

Nodes 4, 6, and 7 are the cut vertices of graph `G`. Use `highlight` to enlarge the cut vertices referenced in `iC`.

```
highlight(p, iC)
```

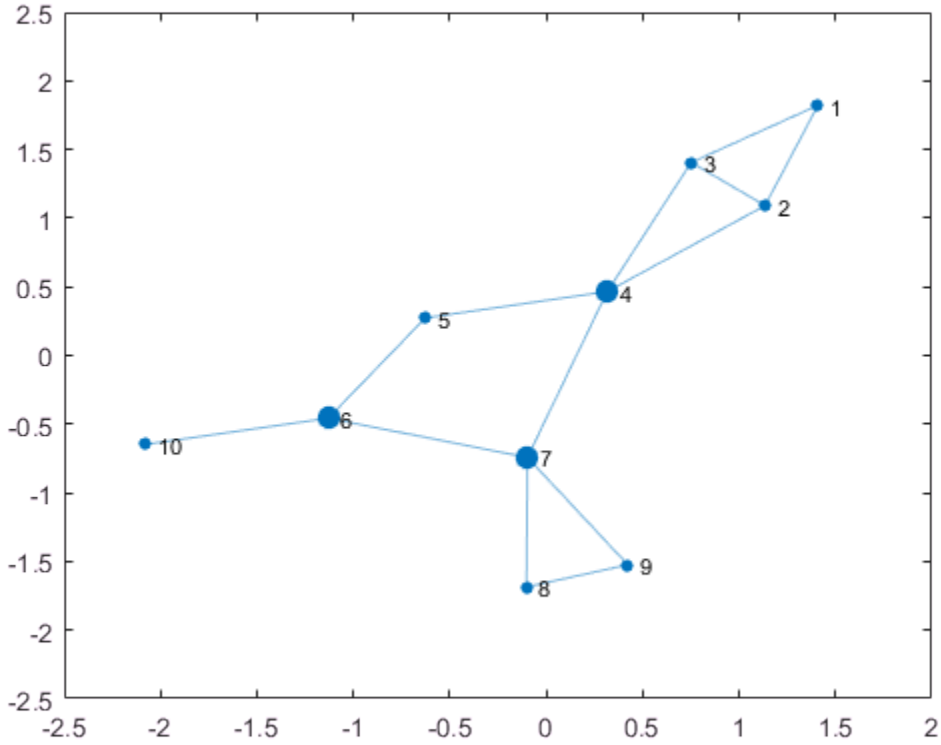

Input Arguments

G — Input graph

graph object

Input graph, specified as a graph object. Use the graph function to create an undirected graph object. For more information, see graph.

Example: `G = graph(1,2)`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `bins = biconncomp(G,'OutputForm','cell')`

`'OutputForm'` — Type of output
`'vector'` (default) | `'cell'`

Type of output, specified as the comma-separated pair consisting of `'OutputForm'` and either `'vector'` or `'cell'`.

Option	Output
`'vector'` (default)	`bins` is a numeric vector indicating which biconnected component each edge belongs to.
`'cell'`	`bins` is a cell array, and `bins{j}` contains the node IDs for all nodes that belong to component `j`.

Output Arguments

`bins` — Biconnected components
vector | cell array

Biconnected components, returned as a vector or cell array. The bin numbers assign each edge or node in the graph to a biconnected component:

- If `OutputForm` is `'vector'` (default), then `bins` is a numeric vector indicating which connected component (bin) each edge belongs to.
- If `OutputForm` is `'cell'`, then `bins` is a cell array, with `bins{j}` containing the node IDs for all nodes that belong to component `j`.

`iC` — Indices of cut vertices
vector

Indices of cut vertices, returned as a vector of numeric node IDs.

Definitions

Biconnected Components

A biconnected component of a graph is a maximally biconnected subgraph. A graph is biconnected if it does not contain any cut vertices.

Decomposing a graph into its biconnected components helps to measure how well-connected the graph is. You can decompose any connected graph into a tree of biconnected components, called the *block-cut tree*. The blocks in the tree are attached at shared vertices, which are the cut vertices.

The illustration depicts:

- (a) An undirected graph with 11 nodes.
- (b) Five biconnected components of the graph, with the cut vertices of the original graph colored for each component to which they belong.
- (c) Block-cut tree of the graph, which contains a node for each biconnected component (as large circles) and a node for each cut vertex (as smaller multicolored circles). In the block-cut tree, an edge connects each cut vertex to each component to which it belongs.

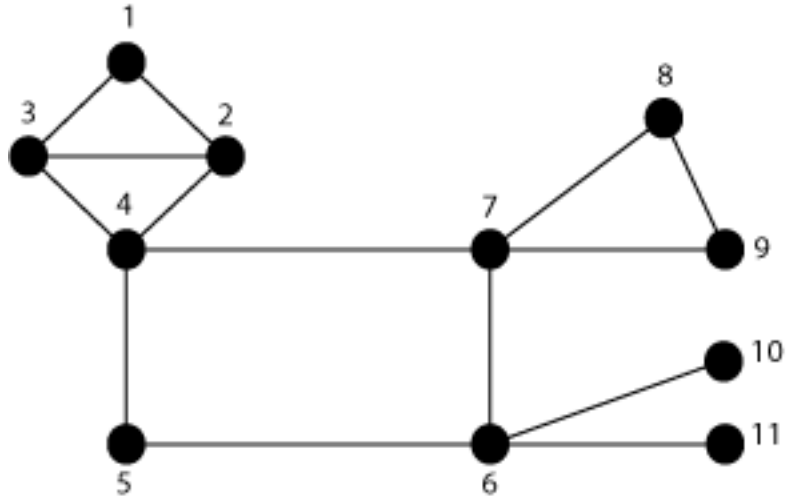

(a)

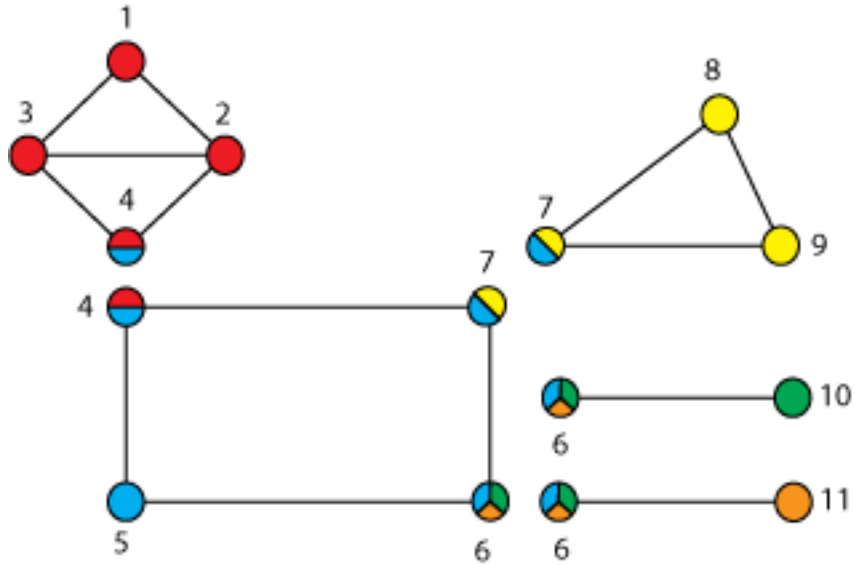

(b)

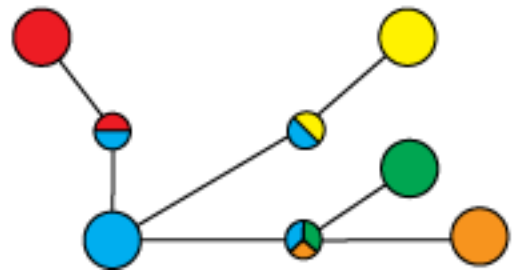

(c)

Cut Vertices

Also known as *articulation points*, cut vertices are graph nodes whose removal increases the number of connected components. In the previous illustration, the cut vertices are those nodes with more than one color: nodes 4, 6, and 7.

See Also

See Also

`bctree` | `condensation` | `conncomp`

Topics

"Directed and Undirected Graphs"
"Visualize Breadth-First and Depth-First Search"

Introduced in R2016b

centrality

Measure node importance

Syntax

```
C = centrality(G,type)
C = centrality( ___ ,Name,Value)
```

Description

`C = centrality(G,type)` computes the node centrality specified by `type` for each node in the graph.

`C = centrality( ___ ,Name,Value)` uses additional options specified by one or more Name-Value pair arguments. For example, `centrality(G,'closeness','Cost',c)` specifies the cost of traversing each edge.

Examples

Page Rank of 6 Websites

Create and plot a graph containing six fictitious websites.

```
s = [1 1 2 2 3 3 3 4 5];
t = [2 5 3 4 4 5 6 1 1];
names = {'http://www.example.com/alpha', 'http://www.example.com/beta', ...
         'http://www.example.com/gamma', 'http://www.example.com/delta', ...
         'http://www.example.com/epsilon', 'http://www.example.com/zeta'};
G = digraph(s,t,[],names);
plot(G,'NodeLabel',{'alpha','beta','gamma','delta','epsilon','zeta'})
```

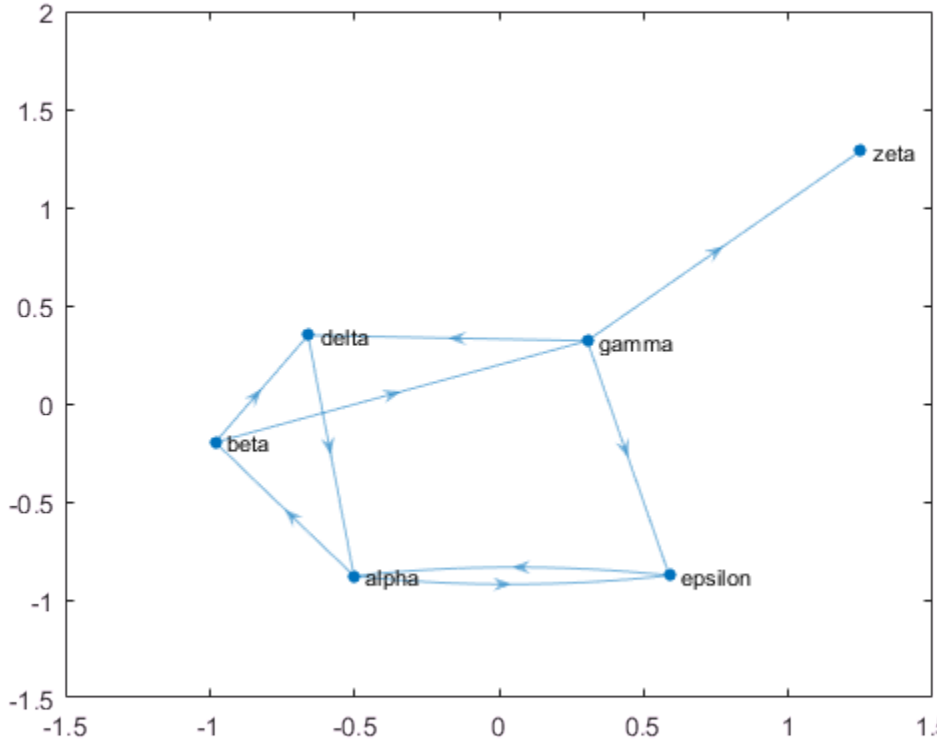

Calculate the page rank of each website using the `centrality` function. Append this information to the `Nodes` table of the graph as an attribute of the graph nodes.

```
pg_ranks = centrality(G,'pagerank')
```

```
pg_ranks =

    0.3210
    0.1706
    0.1066
    0.1368
    0.2008
    0.0643
```

```
G.Nodes.PageRank = pg_ranks;
G.Nodes
```

```
ans = 6×2 table
                    Name                    PageRank
    ________________________________        ________

    'http://www.example.com/alpha'          0.32098
    'http://www.example.com/beta'           0.17057
    'http://www.example.com/gamma'          0.10657
    'http://www.example.com/delta'          0.13678
    'http://www.example.com/epsilon'        0.20078
    'http://www.example.com/zeta'           0.06432
```

Also determine which nodes are hubs and authorities using `centrality` and append the scores to the `Nodes` table.

```
hub_ranks = centrality(G,'hubs');
auth_ranks = centrality(G,'authorities');
G.Nodes.Hubs = hub_ranks;
G.Nodes.Authorities = auth_ranks;
```

```
G.Nodes
```

```
ans = 6×4 table
                    Name                    PageRank       Hubs       Authorities
    ________________________________        ________    __________    ___________

    'http://www.example.com/alpha'          0.32098        0.24995    7.3237e-05
    'http://www.example.com/beta'           0.17057        0.24995      0.099993
    'http://www.example.com/gamma'          0.10657        0.49991      0.099993
    'http://www.example.com/delta'          0.13678     9.1536e-05       0.29998
    'http://www.example.com/epsilon'        0.20078     9.1536e-05       0.29998
    'http://www.example.com/zeta'           0.06432              0       0.19999
```

Degree Centrality of Random Graph

Create and plot a weighted graph using a random sparse adjacency matrix. Since there are a lot of edges, use a very small value for `EdgeAlpha` to make the edges mostly transparent.

```
A = sprand(1000,1000,0.15);
```

```
A = A + A';
G = graph(A,'OmitSelfLoops');
p = plot(G,'Layout','force','EdgeAlpha',0.005,'NodeColor','r');
```

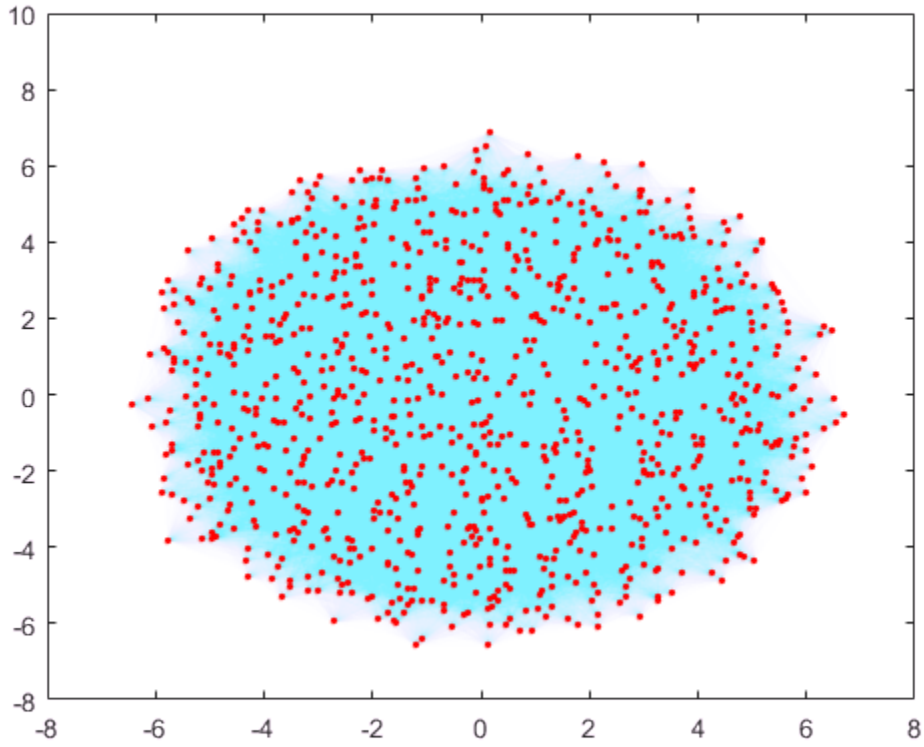

Calculate the degree centrality of each node. Specify the importance of each edge using the edge weights.

```
deg_ranks = centrality(G,'degree','Importance',G.Edges.Weight);
```

Use `discretize` to place the nodes into 7 equally-spaced bins based on their centrality scores.

```
edges = linspace(min(deg_ranks),max(deg_ranks),7);
bins = discretize(deg_ranks,edges);
```

Make the size of each node in the plot proportional to its centrality score. The marker size of each node is equal to the bin number (1-7).

```
p.MarkerSize = bins;
```

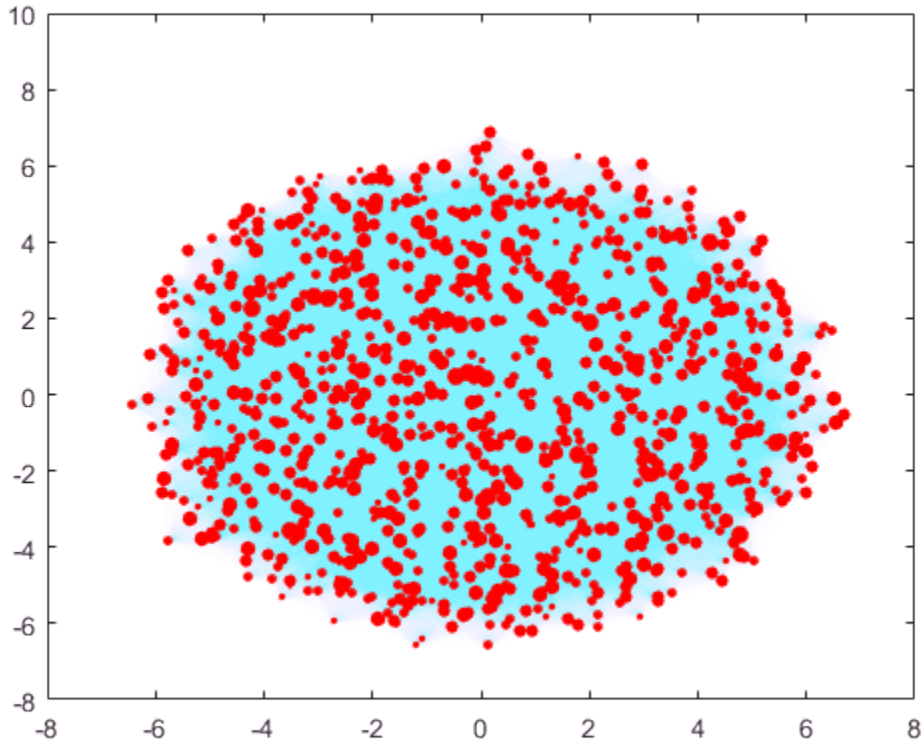

Closeness and Betweenness of Minnesota Roads

Load the data in `minnesota.mat`, which contains a graph object `G` representing the network of roads in Minnesota. The graph nodes have *xy* coordinates contained in the `XCoord` and `YCoord` variables of the `G.Nodes` table.

```
load(fullfile(matlabroot,'examples','matlab','minnesota.mat'))
xy = [G.Nodes.XCoord G.Nodes.YCoord];
```

Add edge weights to the graph that roughly correspond to the length of the roads, calculated using the Euclidean distance between the *xy* coordinates of the end nodes of each edge.

```
[s,t] = findedge(G);
G.Edges.Weight = hypot(xy(s,1)-xy(t,1), xy(s,2)-xy(t,2));
```

Plot the graph using the *xy* coordinates for the nodes.

```
p = plot(G,'XData',xy(:,1),'YData',xy(:,2),'MarkerSize',5);
title('Minnesota Road Network')
```

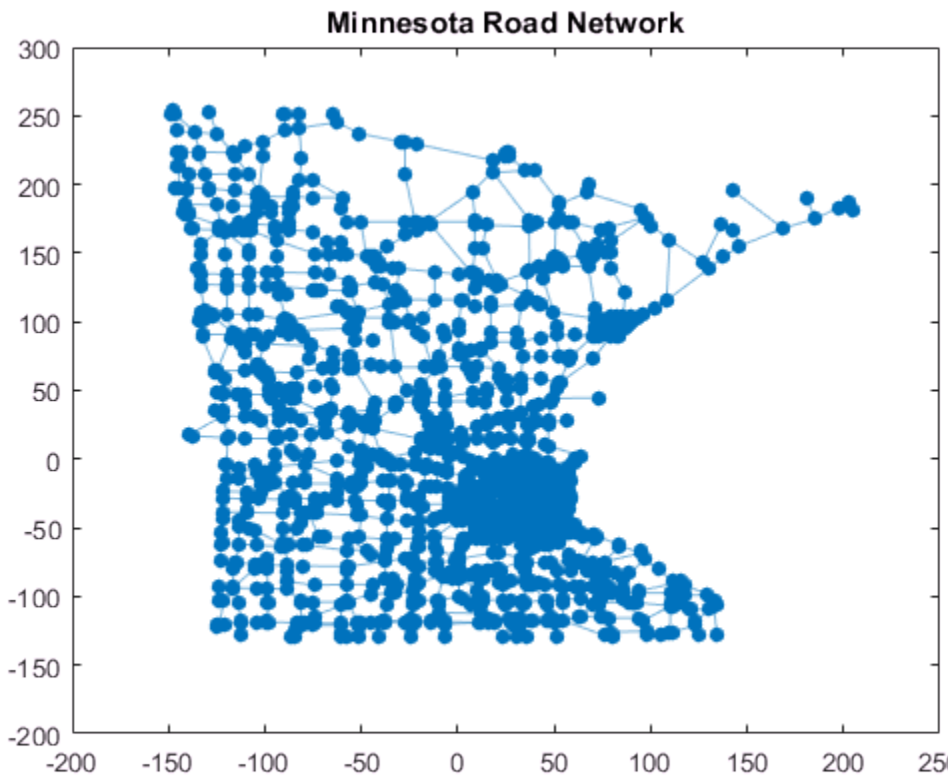

Compute the closeness centrality of each node. Scale the node color `NodeCData` to be proportional to the centrality score.

```
ucc = centrality(G,'closeness');
p.NodeCData = ucc;
colormap jet
colorbar
title('Closeness Centrality Scores - Unweighted')
```

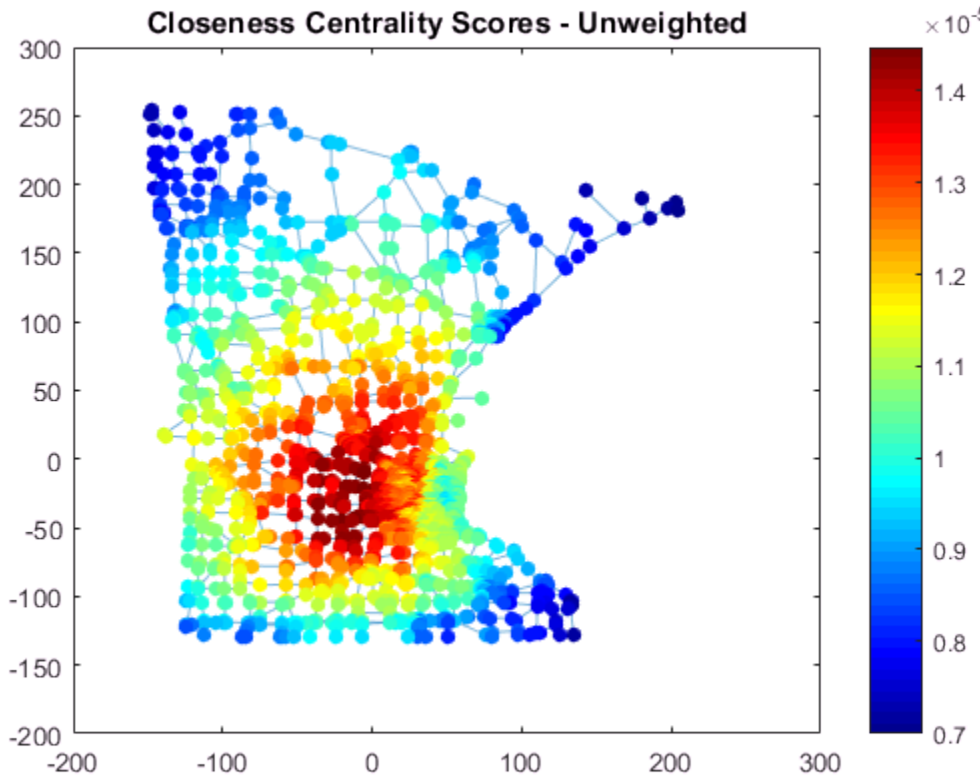

Also compute the weighted closeness centrality score, using the edge weights as the cost of traversing each edge. Using the road lengths as edge weights improves the score quality, since distances are now measured as the sum of the lengths of all traveled edges, rather than the number of edges traveled.

```
wcc = centrality(G,'closeness','Cost',G.Edges.Weight);
p.NodeCData = wcc;
title('Closeness Centrality Scores - Weighted')
```

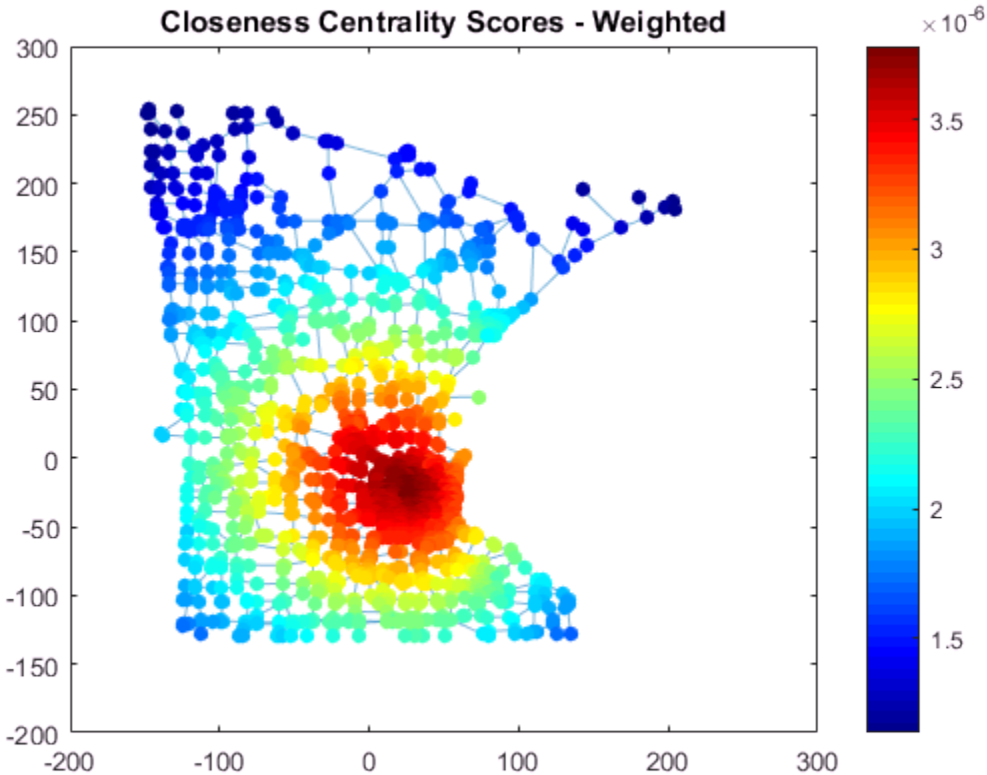

Compute the weighted betweenness centrality scores for the graph to determine the roads most often found on the shortest path between two nodes. Normalize the centrality scores with the factor $\frac{(n-2)(n-1)}{2}$ so that the score represents the probability that a traveler along a shortest path between two random nodes will travel through a given node. The plot indicates that there are a few very important roads leading into and out of the city.

```
wbc = centrality(G,'betweenness','Cost',G.Edges.Weight);
n = numnodes(G);
p.NodeCData = 2*wbc./((n-2)*(n-1));
colormap(flip(autumn,1));
title('Betweenness Centrality Scores - Weighted')
```

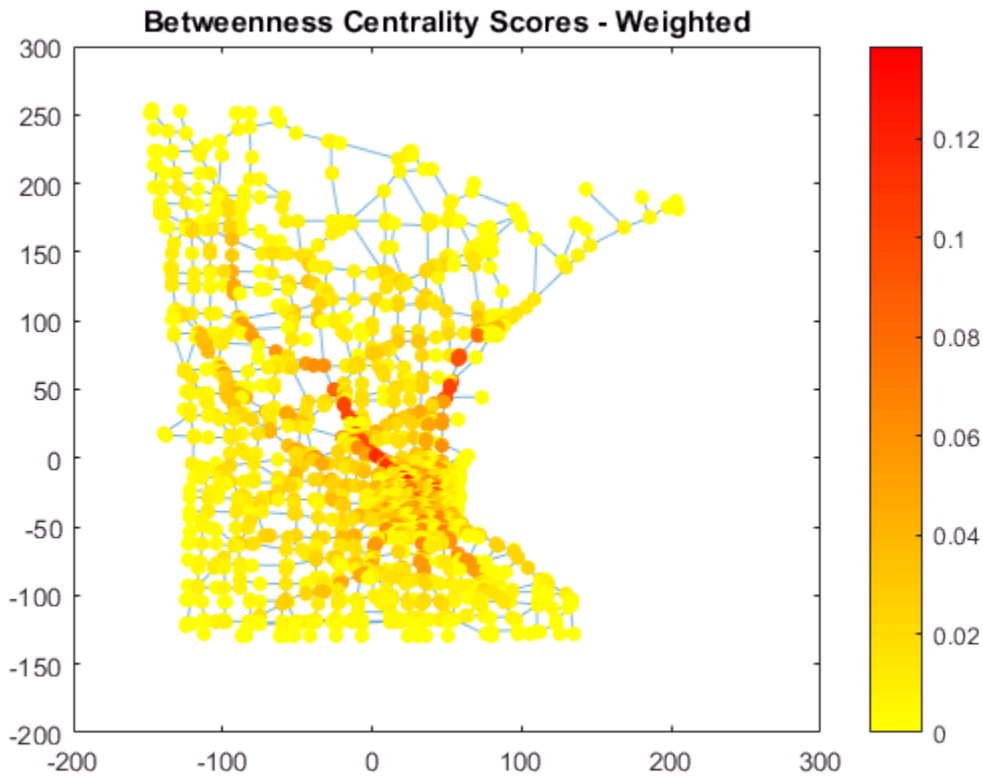

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: `G = digraph([1 2],[2 3])`

`type` — Type of node centrality
`'degree'` | `'outdegree'` | `'indegree'` | `'closeness'` | `'incloseness'` | `'outcloseness'` | `'betweenness'` | `'pagerank'` | `'eigenvector'` | `'hubs'` | `'authorities'`

Type of node centrality, specified as one of the options in the table. The table also lists the compatible Name-Value pairs that work with each type. Each variety of node centrality offers a different measure of node importance in a graph.

Option	Graph type	Description	Name-Value Pairs
`'degree'`	Undirected	The `'degree'`, `'outdegree'`, and `'indegree'` centrality types are based on the number of edges connecting to each node: • `'degree'` — Number of edges connecting to each node. A self-loop counts as two edges connecting to the node. • `'indegree'` — Number of incoming edges to each node. A self-loop counts as one incoming edge. • `'outdegree'` — Number of outgoing edges from each node. A self-loop counts	`'Importance'`
`'indegree'` `'outdegree'`	Directed		

Option	Graph type	Description	Name-Value Pairs
		as one outgoing edge. If you specify `'Importance'` edge weights, then the algorithm uses the sum of the edge weights rather than the number of connecting edges.	

Option	Graph type	Description	Name-Value Pairs
`'closeness'`	Undirected	The `'closeness'`, `'incloseness'`, and `'outcloseness'` centrality types use the inverse sum of the distance from a node to all other nodes in the graph. If not all nodes are reachable, then the centrality of node `i` is: $$c(i) = \left(\frac{A_i}{N-1}\right)^2 \frac{1}{C_i}$$ A_i is the number of reachable nodes from node `i` (not counting `i`), N is the number of nodes in `G`, and C_i is the sum of distances from node `i` to all reachable nodes. • If no nodes are reachable from node `i`, then `c(i)` is zero. • For `'incloseness'`, the distance measure is from all nodes to node `i`.	`'Cost'`
`'incloseness'` `'outcloseness'`	Directed		

Option	Graph type	Description	Name-Value Pairs
		• `'Cost'` edge weights specify the length of the edges.	

Option	Graph type	Description	Name-Value Pairs
`'betweenness'`	Undirected or Directed	The `'betweenness'` centrality type measures how often each graph node appears on a shortest path between two nodes in the graph. Since there can be several shortest paths between two graph nodes `s` and `t`, the centrality of node `u` is: $$c(u) = \sum_{s,t \neq u} \frac{n_{st}(u)}{N_{st}}$$ $n_{st}(u)$ is the number of shortest paths from `s` to `t` that pass through node `u`, and N_{st} is the total number of shortest paths from `s` to `t`. • If the graph is undirected, then the paths from `s` to `t` and from `t` to `s` count only as one path (divide the formula by two).	`'Cost'`

Option	Graph type	Description	Name-Value Pairs
		• `'Cost'` edge weights specify the length of the edges and help determine the shortest paths between nodes `s` and `t`.	

Option	Graph type	Description	Name-Value Pairs

`'pagerank'`	Undirected or Directed	The `'pagerank'` centrality type results from a random walk of the network. At each node in the graph, the next node is chosen with probability `'FollowProbabilit` from the set of successors of the current node (neighbors for the undirected case). Otherwise, or when a node has no successors, the next node is chosen from all nodes. The centrality score is the average time spent at each node during the random walk.
		• If a node has a self-loop, then there is a chance that the algorithm traverses it. Therefore self-loops increase the pagerank centrality score of the node they attach to.
			`'Importance'`
			`'FollowProbability'`
			`'Tolerance'`
			`'MaxIterations'`

Option	Graph type	Description	Name-Value Pairs
		• `'Importance'` edge weights affect how the algorithm chooses successors. Nodes with higher importance are more likely to be chosen.	

Option	Graph type	Description	Name-Value Pairs

`'eigenvector'`	Undirected	The `'eigenvector'` centrality type uses the eigenvector corresponding to the largest eigenvalue of the graph adjacency matrix. The scores are normalized such that the sum of all centrality scores is 1.
		• If there are several disconnected components, then the algorithm computes the eigenvector centrality individually for each component, then scales the scores according to the percentage of graph nodes in that component.
		• The centrality score of disconnected nodes is `1/numnodes(G)`.
		• Specify `'Importance'` edge weights to use a weighted adjacency matrix in the calculation.
			`'Importance'`
			`'Tolerance'`
			`'MaxIterations'`

Option	Graph type	Description	Name-Value Pairs

`'hubs'`
 	
`'authorities'`
	Directed	The `'hubs'` and `'authorities'` centrality scores are two linked centrality measures that are recursive. The hubs score of a node is the sum of the authorities scores of all its successors. Similarly, the authorities score is the sum of the hubs scores of all its predecessors. The sum of all hubs scores is 1 and the sum of all authorities scores is 1.
		
		• These scores can be interpreted as the left (hubs) and right (authorities) singular vectors corresponding to the largest singular value of the adjacency matrix.
		• The centrality score of disconnected nodes is `1/numnodes(G)`.
		• Specify `'Importance'`
			`'Importance'`
			
			`'Tolerance'`
			
			`'MaxIterations'`

Option	Graph type	Description	Name-Value Pairs
		edge weights to use a weighted sum, rather than the simple sum of all successor/predecessor scores. This is equivalent to using the singular vectors of the weighted adjacency matrix. • If there are several disconnected components (in the weakly connected sense), then the algorithm computes the hubs and authorities scores individually for each component. The scores are then rescaled according to the percentage of graph nodes in that component so that the overall sum is still 1.	

Note: The `centrality` function assumes all edge weights are equal to 1. To change this, specify edge weights for use with the `'Cost'` or `'Importance'` name-value pairs.

Example: `centrality(G,'degree')`

Example: `centrality(G,'hubs','Tolerance',tol)`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `C = centrality(G,'closeness','Cost',edgeCosts)` computes the closeness centrality using `edgeCosts` as the cost (weight) of traversing each edge in the graph.

`'Cost'` — Cost of edge traversal

vector

Cost of edge traversal, specified as the comma-separated pair consisting of `'Cost'` and a vector of positive edge weights. The ith edge weight specifies the cost associated with traversing the edge `findedge(G,i)`. All edge weights must be greater than zero.

`'Cost'` edge weights are smaller when the connection is shorter, or faster, or cheaper. Some examples of `'Cost'` edge weights are:

- Length of a path
- Travel time
- Cost of a ticket

Note: `'Cost'` only applies to the `'closeness'`, `'outcloseness'`, `'incloseness'`, and `'betweenness'` centrality types.

Example: `centrality(G,'closeness','Cost',c)`

`'FollowProbability'` — Probability of selecting a successor node

`0.85` (default) | scalar between 0 and 1

Probability of selecting a successor node, specified as the comma-separated pair consisting of `'FollowProbability'` and a scalar between 0 and 1. The follow probability is the probability that the next node selected in the traversal by the pagerank

algorithm is chosen among the successors of the current node, and not at random from all nodes. For websites, this probability corresponds to clicking a link on the current web page instead of surfing to another random web page.

Note: `'FollowProbability'` only applies to the `'pagerank'` centrality type.

Example: `centrality(G,'pagerank','FollowProbability',0.5)`

`'Importance'` — Edge importance

vector

Edge importance, specified as the comma-separated pair consisting of `'Importance'` and a vector of nonnegative edge weights. The ith edge weight specifies the importance of the edge `findedge(G,i)`. An edge weight of zero is equivalent to removing that edge from the graph.

`'Importance'` edge weights are larger when the connection is stronger. Some examples of `'Importance'` edge weights are:

- Number of travellers per day
- Number of clicks on a link
- Number of papers published together

Note: `'Importance'` only applies to the `'degree'`, `'outdegree'`, `'indegree'`, `'pagerank'`, `'eigenvector'`, `'hubs'`, and `'authorities'` centrality types.

Example: `centrality(G,'degree','Importance',x)`

`'MaxIterations'` — Maximum number of iterations

100 (default) | scalar

Maximum number of iterations, specified as the comma-separated pair consisting of `'MaxIterations'` and a scalar.

Note: `'MaxIterations'` only applies to the `'pagerank'`, `'eigenvector'`, `'hubs'`, and `'authorities'` centrality types.

Example: `centrality(G,'pagerank','MaxIterations',250)`

`'Tolerance'` — Stopping criterion for iterative solvers
`1e-4` (default) | scalar

Stopping criterion for iterative solvers, specified as the comma-separated pair consisting of `'Tolerance'` and a scalar. The centrality calculation stops when the difference to the previous iteration is less than the tolerance in all entries.

Note: `'Tolerance'` only applies to the `'pagerank'`, `'eigenvector'`, `'hubs'`, and `'authorities'` centrality types.

Example: `centrality(G,'pagerank','Tolerance',1e-5)`

Output Arguments

`C` — Node centrality scores
column vector

Node centrality scores, returned as a column vector. `C(i)` is the centrality score of node `i`. The interpretation of the node centrality score depends on the type of centrality computation selected. The more central a node is, the larger its centrality score.

See Also

See Also
`digraph` | `graph`

Introduced in R2016a

conncomp

Connected graph components

Syntax

```
bins = conncomp(G)
bins = conncomp(G,Name,Value)
```

Description

`bins = conncomp(G)` returns the connected components of graph `G` as bins. The bin numbers indicate which component each node in the graph belongs to.

- If `G` is an undirected graph, then two nodes belong to the same component if there is a path connecting them.
- If `G` is a directed graph, then two nodes belong to the same strong component only if there is a path connecting them in both directions.

`bins = conncomp(G,Name,Value)` uses additional options specified by one or more Name-Value pair arguments. For example, `conncomp(G,'OutputForm','cell')` returns a cell array to describe the connected components.

Examples

Find Graph Components

Create and plot an undirected graph with three connected components. Use `conncomp` to determine which component each node belongs to.

```
G = graph([1 1 4],[2 3 5],[1 1 1],6);
plot(G)
```

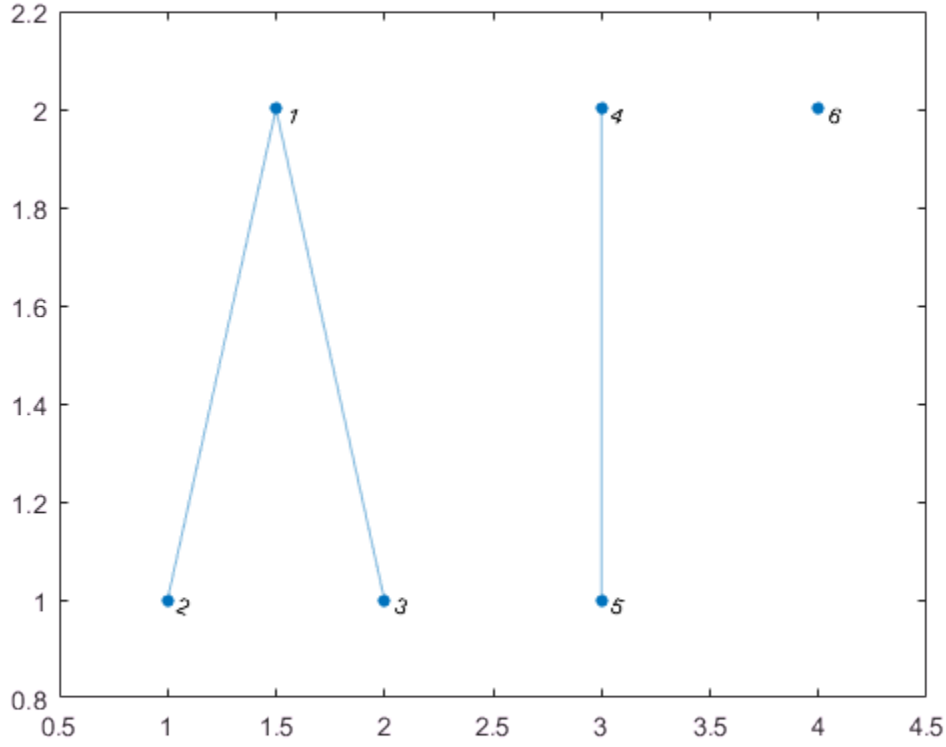


```
bins = conncomp(G)
```

```
bins =

     1     1     1     2     2     3
```

Strong and Weak Graph Components

Create and plot a directed graph, and then compute the strongly connected components and weakly connected components. Weakly connected components ignore the direction of connecting edges.

```
s = [1 2 2 3 3 3 4 5 5 5 8 8];
```

```
t = [2 3 4 1 4 5 5 3 6 7 9 10];
G = digraph(s,t);
plot(G,'Layout','layered')
```

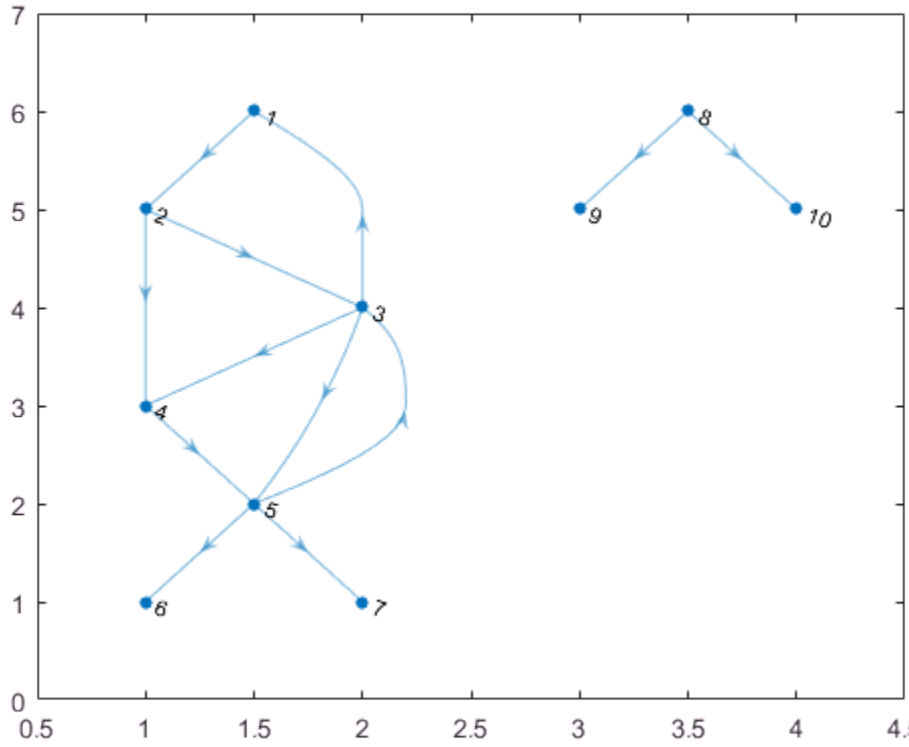


```
str_bins = conncomp(G)
```

```
str_bins =

     4     4     4     4     4     6     5     1     3     2
```

```
weak_bins = conncomp(G,'Type','weak')
```

```
weak_bins =
```

```
     1     1     1     1     1     1     1     2     2     2
```

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: G = digraph([1 2],[2 3])

Name-Value Pair Arguments

Specify optional comma-separated pairs of Name,Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside single quotes (' '). You can specify several name and value pair arguments in any order as Name1,Value1,...,NameN,ValueN.

Example: bins = conncomp(G,'OutputForm','cell')

'OutputForm' — Type of output

'vector' (default) | 'cell'

Type of output, specified as the comma-separated pair consisting of 'OutputForm' and either 'vector' or 'cell'.

Option	Output
'vector' (default)	bins is a numeric vector indicating which connected component each node belongs to.
'cell'	bins is a cell array, and bins{j} contains the node IDs for all nodes that belong to component j.

'Type' — Type of connected components

'strong' (default) | 'weak'

Note: The `'Type'` option is supported only for directed graphs created using `digraph`.

Type of connected components, specified as the comma-separated pair consisting of `'Type'` and either `'strong'` (default) or `'weak'`.

Option	Result
`'strong'` (default)	Two nodes belong to the same connected component only if there is a path connecting them in *both* directions.
`'weak'`	Two nodes belong to the same connected component if there is a path connecting them, ignoring edge directions.

Example: `bins = conncomp(G,'Type','weak')` computes the weakly connected components of directed graph `G`.

Output Arguments

`bins` — Connected components
vector | cell array

Connected components, returned as a vector or cell array. The bin numbers assign each node in the graph to a connected component:

- If `OutputForm` is `'vector'` (default), then `bins` is a numeric vector indicating which connected component (bin) each node belongs to.
- If `OutputForm` is `'cell'`, then `bins` is a cell array, with `bins{j}` containing the node IDs for all nodes that belong to component `j`.

Definitions

Weakly Connected Components

Two nodes belong to the same weakly connected component if there is a path connecting them (ignoring edge direction). There are no edges between two weakly connected components.

The concepts of strong and weak components apply only to directed graphs, as they are equivalent for undirected graphs.

Strongly Connected Components

Two nodes belong to the same strongly connected component if there are paths connecting them in both directions. There can be edges between two strongly connected components, but these connecting edges are never part of a cycle.

The bin numbers of strongly connected components are such that any edge connecting two components points from the component of smaller bin number to the component with a larger bin number.

The concepts of strong and weak components apply only to directed graphs, as they are equivalent for undirected graphs.

See Also

See Also

`digraph` | `graph` | `subgraph`

Topics

graph
digraph

Introduced in R2015b

degree

Degree of graph nodes

Syntax

```
D = degree(G)
D = degree(G,nodeIDs)
```

Description

`D = degree(G)` returns the degree of each node in graph `G`. The degree is the number of edges connected to each node.

`D = degree(G,nodeIDs)` returns the degree of the nodes specified by `nodeIDs`.

Examples

Degree of All Graph Nodes

Create and plot a graph, and then use `degree` to find the degree of each node in the graph.

```
s = [1 1 1 4 4 6 6 6];
t = [2 3 4 5 6 7 8 9];
G = graph(s,t);
plot(G)
```

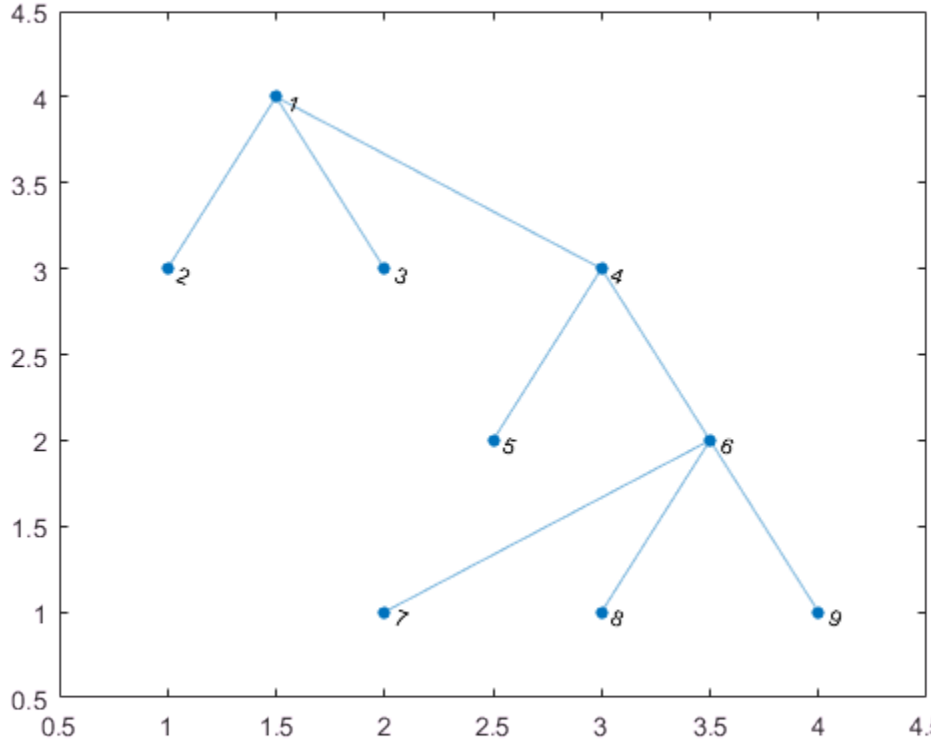


```
deg = degree(G)
```

```
deg =

     3
     1
     1
     3
     1
     4
     1
     1
     1
```

`deg(j)` indicates the degree of node `j`.

Degree of Subset of Graph Nodes

Create and plot a graph, and then find the degree of the first, third, and fifth nodes.

```
s = {'a' 'a' 'a' 'd' 'd' 'f' 'f' 'f'};
t = {'b' 'c' 'd' 'e' 'f' 'g' 'h' 'i'};
G = graph(s,t);
plot(G)
```

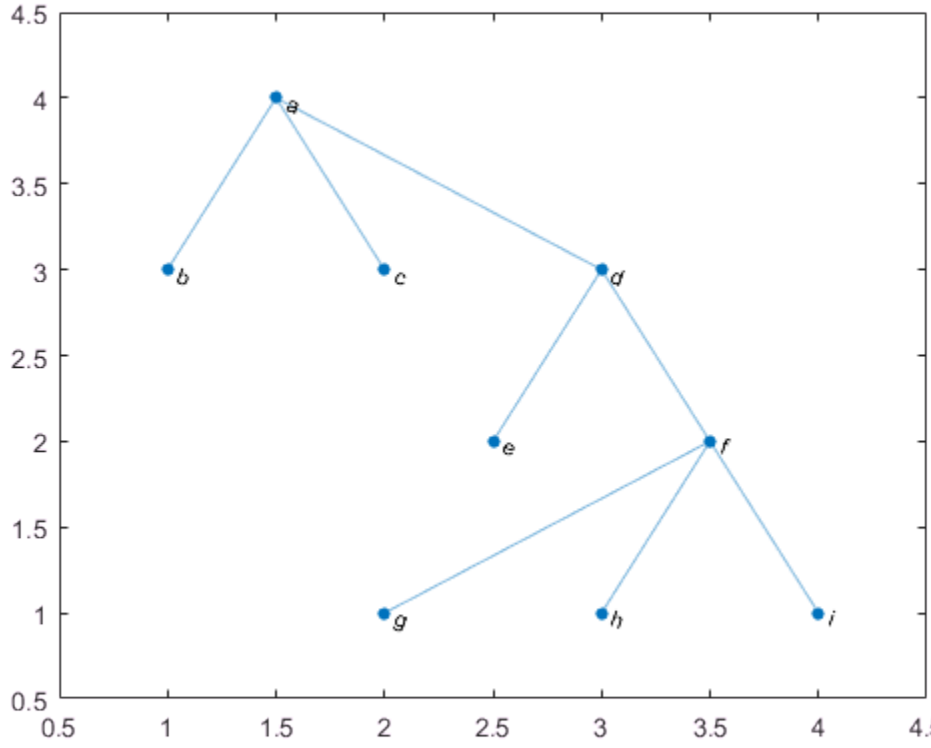


```
nodeIDs = {'a' 'c' 'e'}';
```

```
deg = degree(G,nodeIDs)
```

```
deg =

     3
     1
     1
```

`deg(j)` indicates the degree of node `nodeIDs(j)`.

Input Arguments

`G` — Input graph

`graph` object

Input graph, specified as a `graph` object. Use the `graph` function to create an undirected graph object. For more information, see graph.

Example: `G = graph(1,2)`

`nodeIDs` — Node identifiers

scalar | vector | matrix | character vector | cell array of character vectors

Node identifiers, specified as a scalar node index, a vector or matrix of numeric node indices, a character vector node name, or a cell array of character vectors containing node names. You can refer to the nodes either by their numeric node index or by their node names.

Example: `D = degree(G,[3 4])`

Example: `D = degree(G,{'LAX','ALB'})`

Output Arguments

`D` — Degree of nodes

array

Degree of nodes, returned as a numeric array. `D` is a column vector unless you specify `nodeIDs`, in which case `D` has the same size as `nodeIDs`.

A node that is connected to itself by an edge (a self-loop) is listed as its own neighbor twice, and the self-loop adds 2 to the total degree of the node.

See Also

See Also

`graph` | `neighbors`

Topics

graph

Introduced in R2015b

dfsearch

Depth-first graph search

Syntax

```
v = dfsearch(G,s)
T = dfsearch(G,s,events)
T = dfsearch( ___ ,'Restart',true)
```

Description

`v = dfsearch(G,s)` applies depth-first search to graph `G` starting at node `s`. The result is a vector of node IDs in order of their discovery.

`T = dfsearch(G,s,events)` customizes the output of the depth-first search by flagging one or more search events. For example, `T = dfsearch(G,s,'allevents')` returns a table containing all flagged events, and `X = dfsearch(G,s,'edgetonew')` returns a matrix or cell array of edges.

`T = dfsearch( ___ ,'Restart',true)` restarts the search if no new nodes are reachable from the discovered nodes. You can use any of the input argument combinations in previous syntaxes. This option ensures that the depth-first search reaches all nodes and edges in the graph, even if they are not reachable from the starting node, `s`.

Examples

Perform Depth-First Graph Search

Create and plot a graph.

```
s = [1 1 1 1 2 2 2 2 2 2 2 2 2 2 15 15 15 15 15];
t = [3 5 4 2 14 6 11 12 13 10 7 9 8 15 16 17 19 18 20];
G = graph(s,t);
plot(G)
```

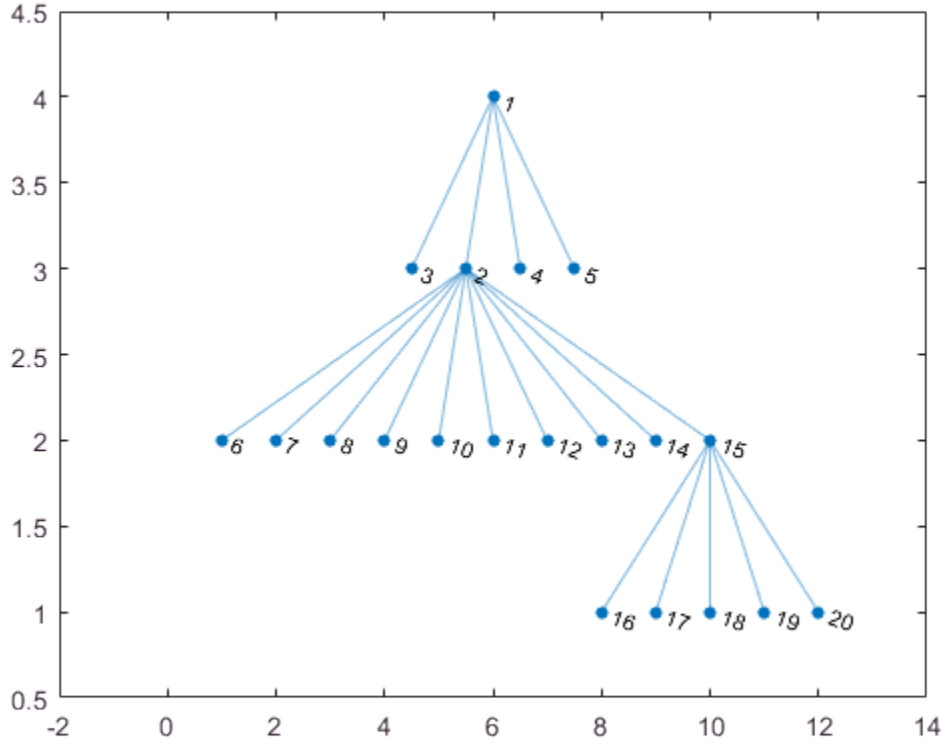

Perform a depth-first search of the graph starting at node 17. The result indicates the order of node discovery.

```
v = dfsearch(G,17)
```

```
v =

    17
    15
     2
     1
     3
     4
     5
```

```
     6
     7
     8
```

Depth-First Graph Search with All Events

Create and plot a directed graph.

```
A = [0 1 0 1 1 0 0;
     0 0 0 0 0 0 0;
     0 0 0 1 0 1 1;
     0 0 0 0 0 1 0;
     0 0 0 0 0 0 0;
     0 0 0 0 0 0 0;
     0 0 0 0 0 0 0];
G = digraph(A);
plot(G)
```

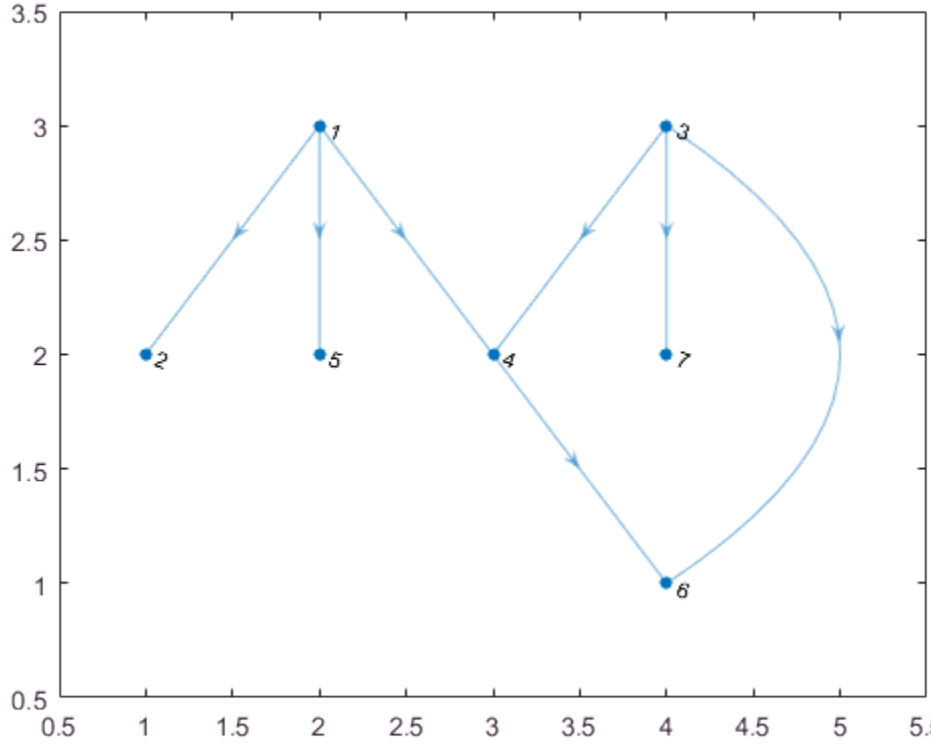

Perform a depth-first search on the graph starting at node 3. Specify `'allevents'` to return a table containing all of the events in the algorithm.

```
T = dfsearch(G,3,'allevents')
```

```
T = 13×3 table
        Event          Node        Edge
    _______________    ____    ___________

    startnode           3      NaN     NaN
    discovernode        3      NaN     NaN
    edgetonew         NaN        3       4
    discovernode        4      NaN     NaN
    edgetonew         NaN        4       6
```

```
discovernode        6     NaN    NaN
finishnode          6     NaN    NaN
finishnode          4     NaN    NaN
edgetofinished    NaN       3      6
edgetonew         NaN       3      7
discovernode        7     NaN    NaN
finishnode          7     NaN    NaN
finishnode          3     NaN    NaN
```

To follow the steps in the algorithm, read the events in the table from top to bottom. For example:

1. The algorithm begins at node 3
2. An edge is discovered between node 3 and node 4
3. Node 4 is discovered
4. and so on...

Depth-First Graph Search with Multiple Components

Perform a depth-first search of a graph with multiple components, and then highlight the graph nodes and edges based on the search results.

Create and plot a directed graph. This graph has two weakly connected components.

```
s = [1 1 2 2 2 3 4 7 8 8 8 8];
t = [3 4 7 5 6 2 6 2 9 10 11 12];
G = digraph(s,t);
p = plot(G,'Layout','layered');
```

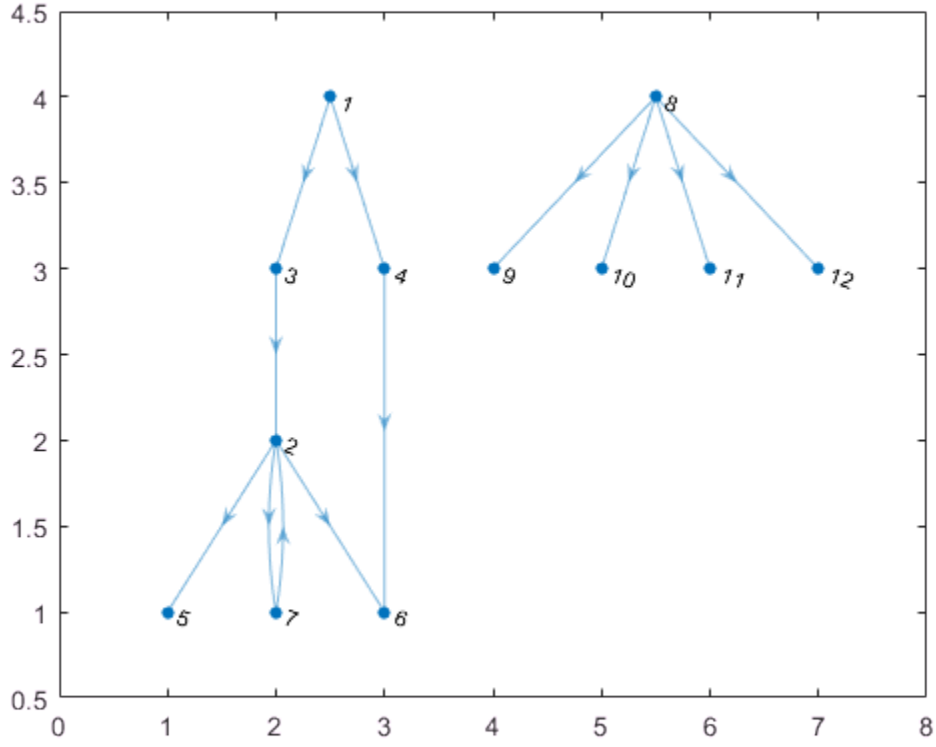


```
c = conncomp(G,'Type','weak')
```

```
c =

     1     1     1     1     1     1     1     2     2     2     2     2
```

Perform a depth-first search of the graph starting at node 4, and flag the `'edgetonew'`, `'edgetodiscovered'`, `'edgetofinished'`, and `'startnode'` events. Specify `Restart` as `true` to make the search restart whenever there are remaining nodes that cannot be reached.

```
events = {'edgetonew','edgetodiscovered','edgetofinished','startnode'};
T = dfsearch(G,4,events,'Restart',true)
```

```
T = 15×3 table
         Event           Node       Edge
    _________________    ____    __________

    startnode              4     NaN    NaN
    edgetonew            NaN       4      6
    startnode              1     NaN    NaN
    edgetonew            NaN       1      3
    edgetonew            NaN       3      2
    edgetonew            NaN       2      5
    edgetofinished       NaN       2      6
    edgetonew            NaN       2      7
    edgetodiscovered     NaN       7      2
    edgetofinished       NaN       1      4
    startnode              8     NaN    NaN
    edgetonew            NaN       8      9
    edgetonew            NaN       8     10
    edgetonew            NaN       8     11
    edgetonew            NaN       8     12
```

When `Restart` is `true`, the `'startnode'` event returns information about where and when the algorithm restarts the search.

Highlight the graph based on event:

- Color the starting nodes red.
- Green edges are for `'edgetonew'`
- Black edges are for `'edgetofinished'`
- Magenta edges are for `'edgetodiscovered'`

```
edgenew = T.Edge(T.Event == 'edgetonew',:);
edgefin = T.Edge(T.Event == 'edgetofinished',:);
edgedis = T.Edge(T.Event == 'edgetodiscovered',:);

highlight(p,edgedis(:,1),edgedis(:,2),'EdgeColor','m')
highlight(p,edgenew(:,1),edgenew(:,2),'EdgeColor','g')
highlight(p,edgefin(:,1),edgefin(:,2),'EdgeColor','k')
highlight(p,T.Node(~isnan(T.Node)),'NodeColor','r')
```

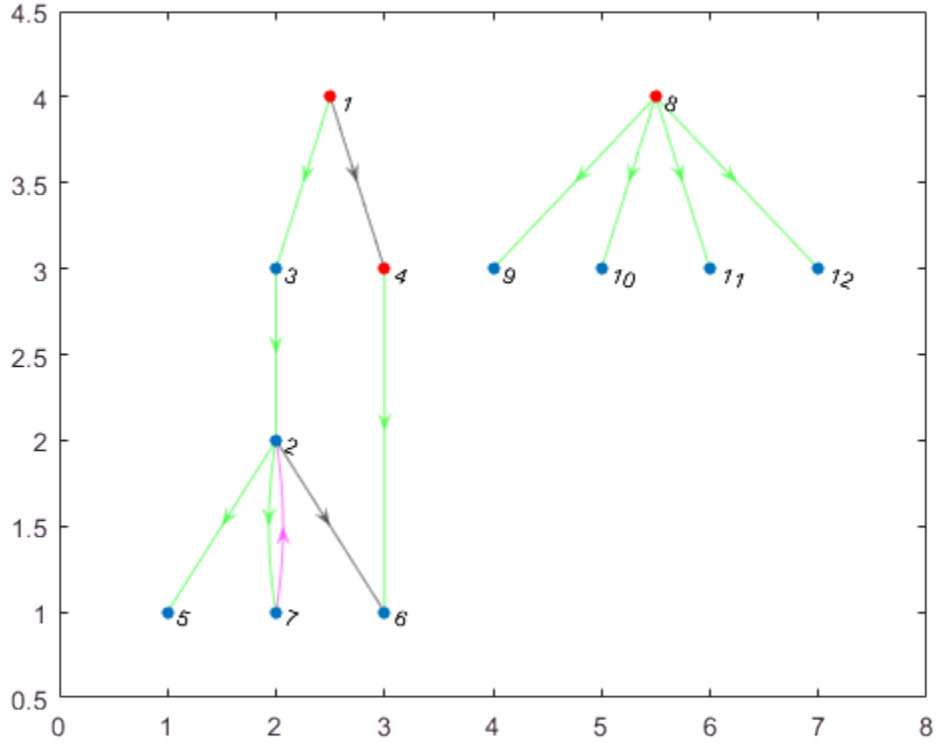

Remove Cycles from Graph

Make a directed graph acyclic by reversing some of its edges.

Create and plot a directed graph.

```
s = [1 2 3 3 3 3 4 5 6 7 8 9 9 9 10];
t = [7 6 1 5 6 8 2 4 4 3 7 1 6 8 2];
g = digraph(s,t);
plot(g, 'Layout', 'force')
```

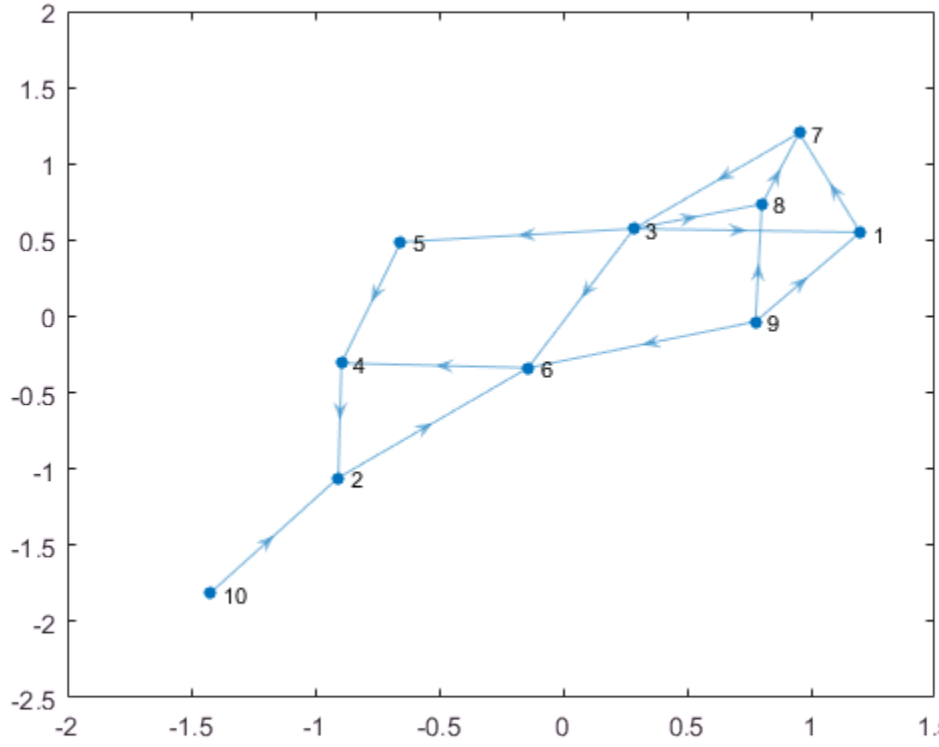

Perform a depth-first search on the graph, flagging the `'edgetodiscovered'` event. This event corresponds to edges that complete a cycle.

```
e = dfsearch(g, 1, 'edgetodiscovered', 'Restart', true)
```

```
e =

     3     1
     6     4
     8     7
```

Reverse the direction of the edges, so that they no longer complete a cycle. This removes all cycles from the graph. Use `isdag` to confirm that the graph is acyclic.

```
gnew = rmedge(g, e(:, 1), e(:, 2));
gnew = addedge(gnew, e(:, 2), e(:, 1));
isdag(gnew)
```

```
ans = logical
   1
```

```
plot(gnew, 'Layout', 'force');
```

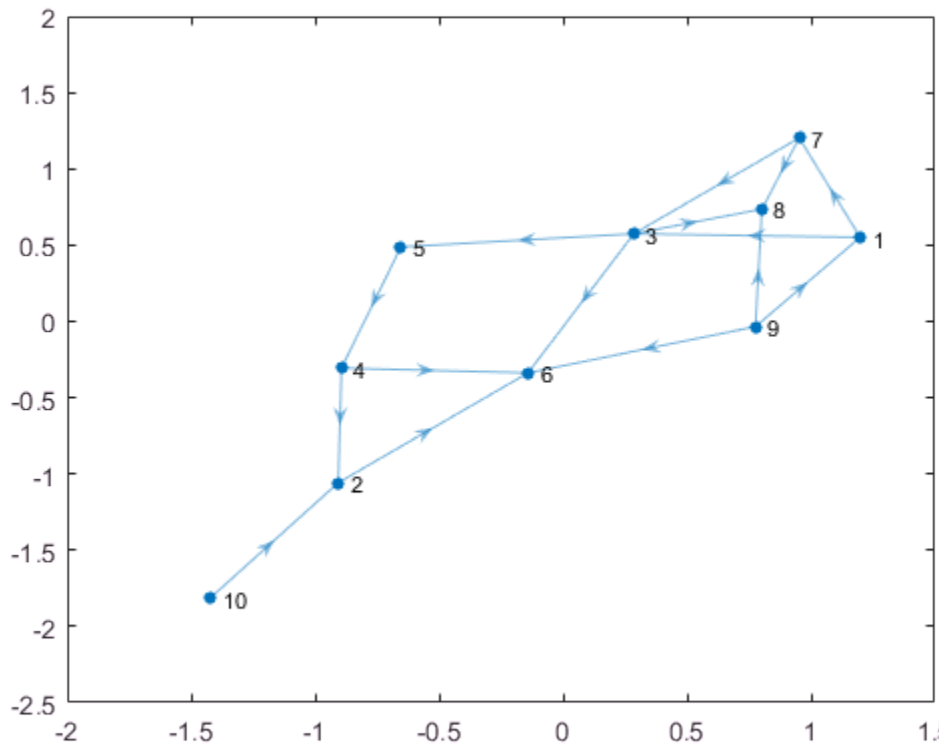

- “Visualize Breadth-First and Depth-First Search”

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: G = digraph([1 2],[2 3])

s — Starting node

nonnegative scalar integer | character vector

Starting node, specified as either a nonnegative scalar integer between 1 and numnodes(G), or a character vector containing a node name.

Example: dfsearch(G,1)

events — Flagged search events

'discovernode' (default) | 'startnode' | 'finishnode' | 'edgetonew' | 'edgetodiscovered' | 'edgetofinished' | 'allevents' | cell array

Flagged search events, specified as one of the options in the following table.

- To flag single events, use the flag names.
- To flag a subset of events, put two or more flag names into a cell array.
- To flag all events, use 'allevents'.

Note: Depending on the value of events, the output of dfsearch varies. See the last column in the following table for information about the output returned by each option.

Value of events	Description	Output
'discovernode' (default)	A new node has been discovered.	Return a vector of node IDs: • If s is a numeric node index, then the vector

Value of events	Description	Output
'finishnode'	All outgoing edges from the node have been visited.	contains numeric node indices. • If s is a node name, then the vector is a cell array containing node names.
'startnode'	This flag indicates the starting node in the search. If 'Restart' is true, then 'startnode' flags the starting node each time the search restarts.	
'edgetonew'	Edge connects to an undiscovered node.	Return a matrix or cell array of size N-by-2 that specifies the end nodes of edges in the graph: • If s is a numeric node index, then the matrix contains numeric node indices. • If s is a node name, then the matrix is a cell array containing node names.
'edgetodiscovered'	Edge connects to a previously discovered node.	
'edgetofinished'	Edge connects to a finished node.	

Value of `events`	Description	Output
cell array	Specify two or more flags in a cell array to only flag those events during the search.	Return a table, `T`, which contains the variables `T.Event`, `T.Node`, and `T.Edge`: • `T.Event` is a categorical vector containing the flags in order of their occurrence. • `T.Node` contains the node ID of the corresponding node for the events `'discovernode'`, `'finishnode'`, and `'startnode'`. • `T.Edge` contains the corresponding edge for the events `'edgetonew'`, `'edgetodiscovered'`, and `'edgetofinished'`. • Unused elements of `T.Node` and `T.Edge` are set to `NaN`. • If `s` is a numeric node index, then `T.Node` and `T.Edge` contain numeric node indices. • If `s` is a node name, then `T.Node` and `T.Edge` are cell arrays containing node names.
`'allevents'`	All events are flagged.	

Example: `v = dfsearch(G,3)` begins the search at the third node and returns a vector, `v`, containing the nodes in order of discovery. This is the same as `v = dfsearch(G,3,'discovernode')`.

Example: `X = dfsearch(G,'A','edgetonew')` begins at the node named `'A'` and returns a cell array of character vectors, `X`, indicating each of the edges that connects to an undiscovered node during the search.

Example: `T = dfsearch(G,s,{'discovernode','finishnode'})` returns a table, `T`, but only flags when new nodes are discovered or when a node is marked finished.

Example: `T = dfsearch(G,s,'allevents')` flags all search events and returns a table, `T`.

Data Types: `char` | `cell`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `v = dfsearch(G,s,'Restart',true)`

`'Restart'` — Toggle to restart search

`false` (default) | `true`

Toggle to restart search, specified as `false` (default) or `true`. This option is useful if the graph contains nodes that are unreachable from the starting node. If `'Restart'` is `true`, then the search restarts whenever undiscovered nodes remain that are unreachable from the discovered nodes. The new start node is the node with smallest index that is still undiscovered. The restarting process repeats until `dfsearch` discovers all nodes.

`'Restart'` is `false` by default, so that the search only visits nodes that are reachable from the starting node.

When `'Restart'` is `true`, the `'discovernode'` and `'finishnode'` events occur once for each node in the graph. Also, each edge in the graph is flagged once by `'edgetonew'`, `'edgetodiscovered'`, or `'edgetofinished'`. The edges flagged by `'edgetonew'` form one or more trees.

Example: `T = dfsearch(graph([1 3],[2 4]),1,'Restart',true)` searches both of the connected components in the graph.

Data Types: `logical`

Output Arguments

v — Node IDs

numeric column vector | cell vector

Node IDs, returned in one of the following formats:

- If you use a numeric node ID to specify the starting node, `s`, then `v` is a numeric column vector of node indices.
- If `s` is a character vector containing a node name, then `v` is a cell vector containing node names.

The node IDs in `v` reflect the order of discovery by the depth-first graph search.

T — Search results

table | vector | matrix | cell array of node names

Search results, returned in one of the following formats:

- If `events` is not specified or is `'discovernode'`, `'finishnode'`, or `'startnode'`, then `T` is a vector of node IDs similar to `v`.
- If `events` is `'edgetonew'`, `'edgetodiscovered'`, or `'edgetofinished'`, then `T` is a matrix or cell array of size `N`-by-`2` indicating the source and target nodes for each relevant edge.
- If `events` is a cell array of search events or `'allevents'`, then `T` is a table containing the flagged search events. The table contains the search event flags in `T.Event`, relevant node IDs in `T.Node`, and relevant edges in `T.Edge`.

In all cases:

- The order of the elements or rows of `T` indicates their order of occurrence during the search.
- If you specify `s` as a numeric node ID, then `T` also refers to nodes using their numeric IDs.
- If you specify `s` as a node name, then `T` also refers to nodes using their names.

Tips

- `dfsearch` and `bfsearch` treat undirected graphs the same as directed graphs. An undirected edge between nodes `s` and `t` is treated like two directed edges, one from `s` to `t` and one from `t` to `s`.

Algorithms

The Depth-First search algorithm begins at the starting node, `s`, and inspects the neighbor of `s` that has the smallest node index. Then for that neighbor, it inspects the next undiscovered neighbor with the lowest index. This continues until the search encounters a node whose neighbors have all been visited. At that point, the search backtracks along the path to the nearest previously discovered node that has an undiscovered neighbor. This process continues until all nodes that are reachable from the starting node have been visited.

In pseudo-code, the (recursive) algorithm can be written as:

```
function DFS(C)

  Event discovernode(C)

  FOR node N from successors of node C
    Event edgetonew(C,N), edgetodiscovered(C,N) or edgetofinished(C,N) depending on the
    IF event was edgetonew
      Call DFS(N)
    END
  END

  Event finish(C)

END
```

`dfsearch` can return flags to describe the different events in the algorithm, such as when a new node is discovered or when all of the outgoing edges of a node have been visited. The event flags are listed here.

Event Flag	Event Description
`'discovernode'`	A new node has been discovered.

Event Flag	Event Description
`'finishnode'`	All outgoing edges from the node have been visited.
`'startnode'`	This flag indicates the starting node in the search.
`'edgetonew'`	Edge connects to an undiscovered node
`'edgetodiscovered'`	Edge connects to a previously discovered node
`'edgetofinished'`	Edge connects to a finished node

For more information, see the input argument description for `events`.

Note: In cases where the input graph contains nodes that are unreachable from the starting node, the `'Restart'` option provides a way to make the search visit every node in the graph. In that case, the `'startnode'` event indicates the starting node each time the search restarts.

See Also

See Also

`bfsearch` | `conncomp` | `digraph` | `graph`

Topics

"Visualize Breadth-First and Depth-First Search"

Introduced in R2015b

distances

Shortest path distances of all node pairs

Syntax

```
d = distances(G)
d = distances(G,s)
d = distances(G,s,t)
d = distances( ___ ,'Method',algorithm)
```

Description

`d = distances(G)` returns a matrix, `d`, where `d(i,j)` is the length of the shortest path between node `i` and node `j`. If the graph is weighted (that is, `G.Edges` contains a variable `Weight`), then those weights are used as the distances along the edges in the graph. Otherwise, all edge distances are taken to be `1`.

`d = distances(G,s)` restricts the source nodes to the nodes defined by `s`, such that `d(i,j)` is the distance from node `s(i)` to node `j`.

`d = distances(G,s,t)` additionally restricts the target nodes to the nodes defined by `t`, such that `d(i,j)` is the distance from node `s(i)` to node `t(j)`.

`d = distances( ___ ,'Method',algorithm)` optionally specifies the algorithm to use in computing the shortest path using any of the input arguments in previous syntaxes. For example, if `G` is a weighted graph, then `distances(G,'Method','unweighted')` ignores the edge weights in `G` and instead treats all edge weights as `1`.

Examples

Shortest Path Distance for All Node Pairs

Create and plot a graph.

```
s = [1 1 1 2 5 5 5 8 9 9];
t = [2 3 4 5 6 7 8 9 10 11];
G = graph(s,t);
plot(G)
```

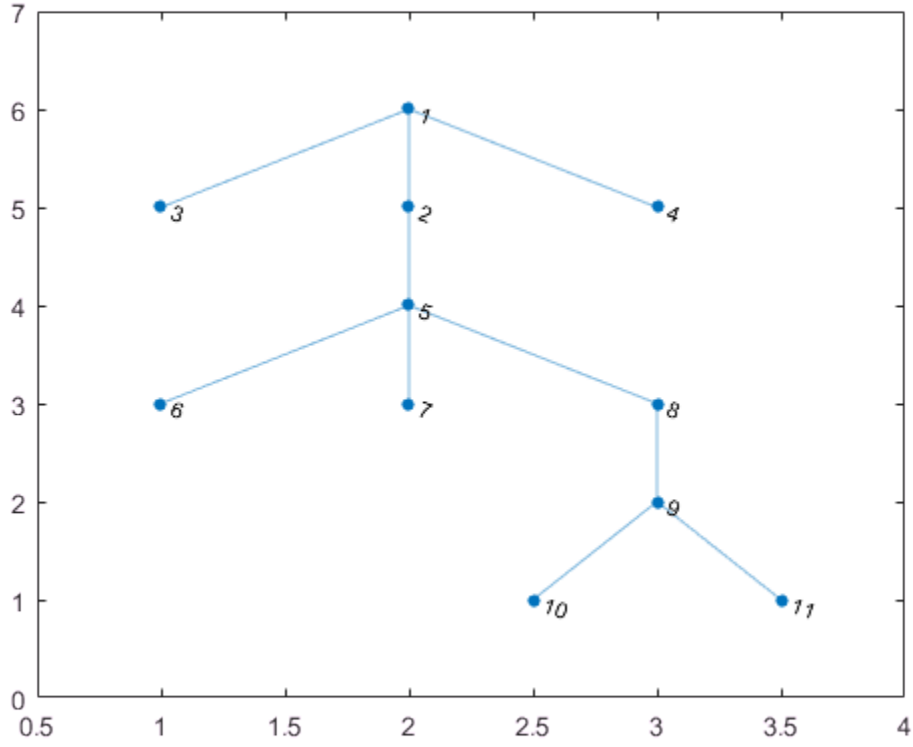

Calculate the shortest path distance between all node pairs in the graph. Since the graph edges do not have weights, all edge distances are taken to be 1.

```
d = distances(G)
```

```
d =

     0     1     1     1     2     3     3     3     4     5     5
     1     0     2     2     1     2     2     2     3     4     4
     1     2     0     2     3     4     4     4     5     6     6
     1     2     2     0     3     4     4     4     5     6     6
     2     1     3     3     0     1     1     1     2     3     3
     3     2     4     4     1     0     2     2     3     4     4
     3     2     4     4     1     2     0     2     3     4     4
```

```
     3     2     4     4     1     2     2     0     1     2     2
     4     3     5     5     2     3     3     1     0     1     1
     5     4     6     6     3     4     4     2     1     0     2
```

`d` is symmetric because `G` is an undirected graph. In general `d(i,j)` is the length of the shortest path between node `i` and node `j`, and for undirected graphs this is equivalent to `d(j,i)`.

For example, find the length of the shortest path between node 1 and node 10.

```
d(1,10)
```

```
ans = 5
```

Shortest Path Distances from Specified Sources

Create and plot a graph.

```
s = [1 1 1 1 2 2 3 4 4 5 6];
t = [2 3 4 5 3 6 6 5 7 7 7];
G = graph(s,t);
plot(G)
```

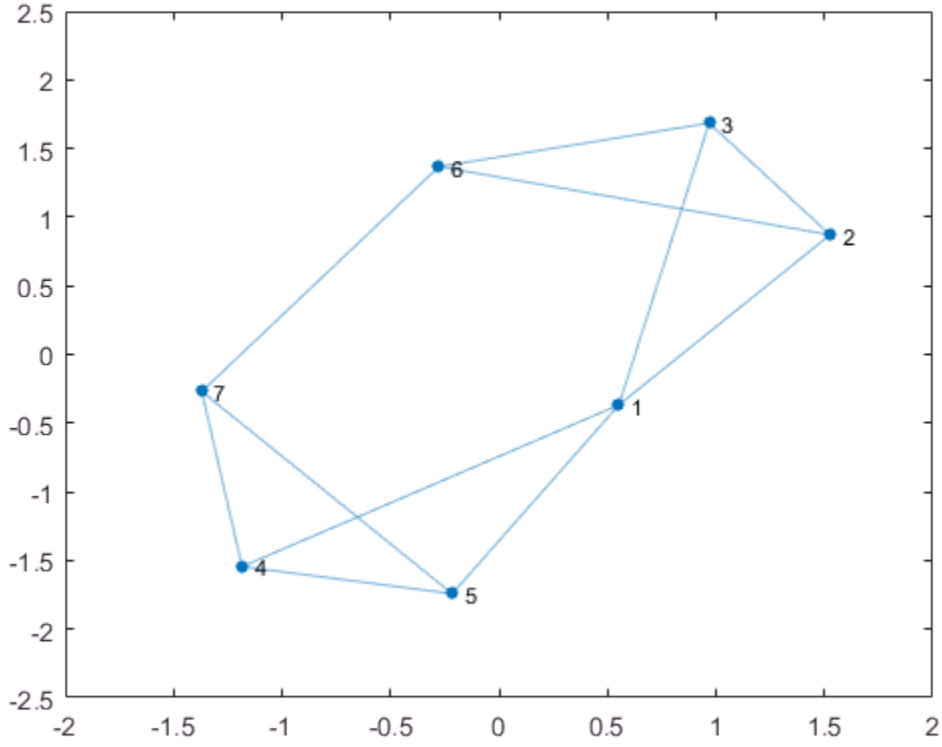

Find the shortest path distances from node 1, node 2, and node 3 to all other nodes in the graph.

```
d = distances(G,[1 2 3])
```

```
d =

     0     1     1     1     1     2     2
     1     0     1     2     2     1     2
     1     1     0     2     2     1     2
```

Use `d` to find the shortest path distance from node 1 to node 7.

```
d(1,7)
```

```
ans = 2
```

Shortest Path Distances to Specified Targets

Create and plot a graph.

```
s = [1 1 1 2 2 3 3 4 5 5 6 7 8  8 10 11];
t = [2 3 10 4 12 5 4 6 6 7 9 8 9 11 11 12];
G = graph(s,t);
plot(G)
```

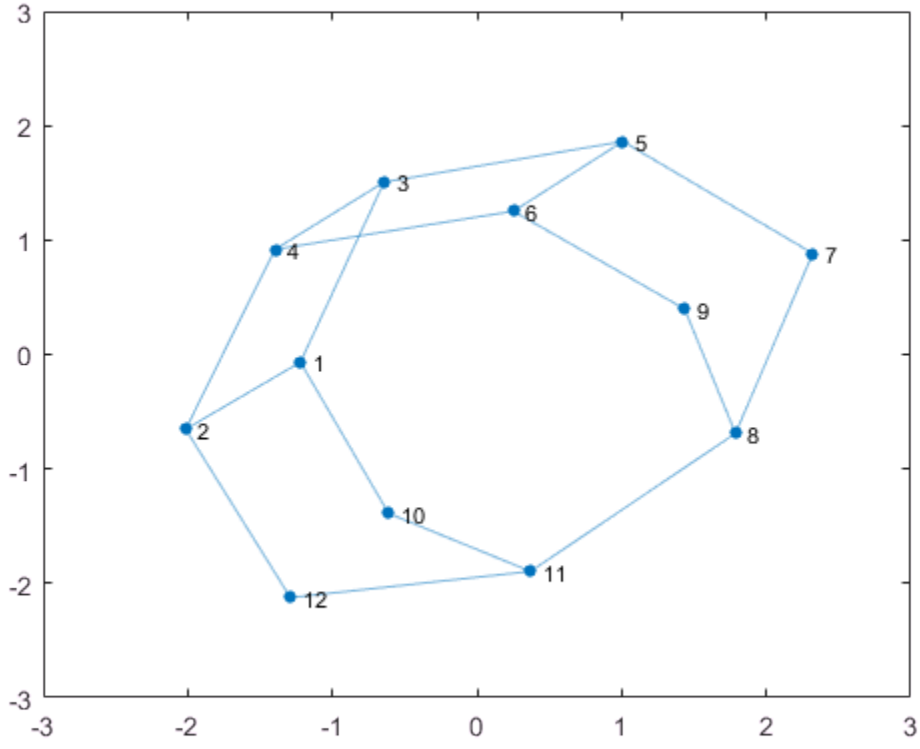

Find the shortest path distances from nodes 5 and 7 to nodes 2 and 3.

```
sources = [5 7];
targets = [2 3];
d = distances(G,sources,targets)
```

```
d =

     3     1
     4     2
```

Use `d` to find the shortest path distance between node 7 and node 3. In this case, `d(i,j)` is the distance from node `sources(i)` to node `targets(j)`.

```
d(2,2)
```

```
ans = 2
```

Ignore Edge Weights

Create and plot a directed graph with weighted edges.

```
s = [1 1 1 2 5 3 6 4 7 8 8 8];
t = [2 3 4 5 3 6 4 7 2 6 7 5];
weights = [100 10 10 10 10 20 10 30 50 10 70 10];
G = digraph(s,t,weights);
plot(G,'EdgeLabel',G.Edges.Weight)
```

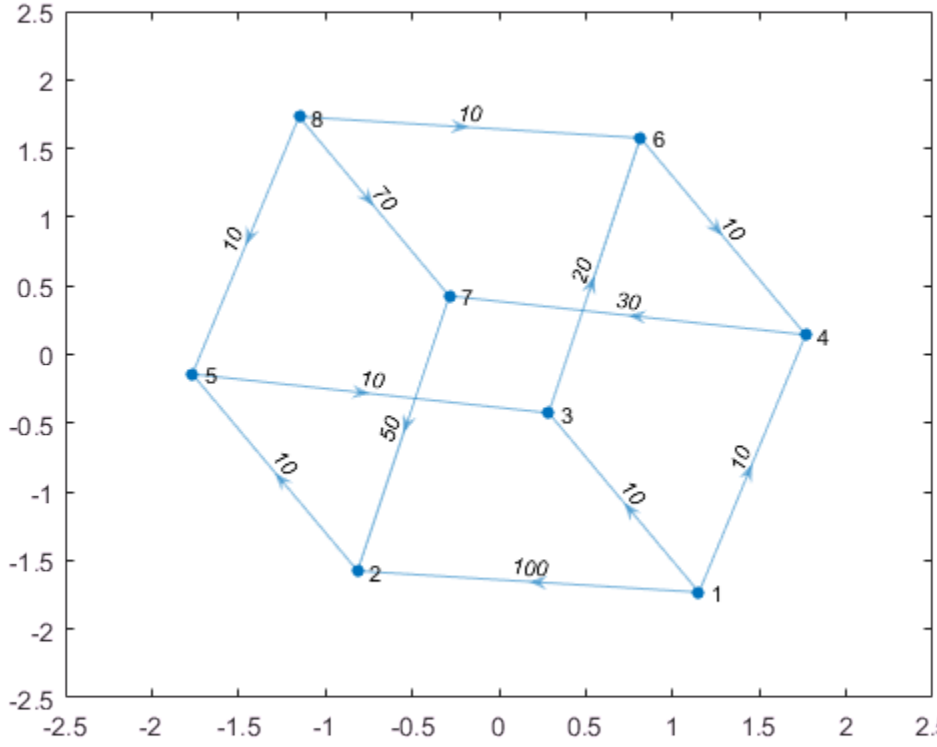

Find the shortest path distance between all pairs of graph nodes.

```
d = distances(G)
```

```
d =

     0    90    10    10   100    30    40   Inf
   Inf     0    20    50    10    40    80   Inf
   Inf   110     0    30   120    20    60   Inf
   Inf    80   100     0    90   120    30   Inf
   Inf   120    10    40     0    30    70   Inf
   Inf    90   110    10   100     0    40   Inf
   Inf    50    70   100    60    90     0   Inf
   Inf   100    20    20    10    10    50     0
```

Since `G` is a directed graph, `d` is not symmetric, and `d(i,j)` corresponds to the distance between nodes `i` and `j`. The `Inf` values in `d` correspond to nodes that are unreachable. For example, since node 1 has no predecessors, it is not possible to reach node 1 from any other node in the graph. So the first column of `d` contains many `Inf` values to reflect that node 1 is unreachable.

By default, `distances` uses the edge weights to compute the distances. Specify `'Method'` as `'unweighted'` to ignore the edge weights and treat all edge distances as 1.

```
d1 = distances(G,'Method','unweighted')
```

```
d1 =

     0     1     1     1     2     2     2   Inf
   Inf     0     2     4     1     3     5   Inf
   Inf     4     0     2     5     1     3   Inf
   Inf     2     4     0     3     5     1   Inf
   Inf     5     1     3     0     2     4   Inf
   Inf     3     5     1     4     0     2   Inf
   Inf     1     3     5     2     4     0   Inf
   Inf     2     2     2     1     1     1     0
```

Input Arguments

G — Input graph

`graph` object | `digraph` object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

s — Source nodes

`'all'` (default) | vector | cell array of character vectors

Source nodes, specified as `'all'`, a vector of node indices, or a cell array of character vectors containing node names.

Example: `distances(G,[1 2])`

Example: `distances(G,'all',[1 3 5])`

`t` — Target nodes

`'all'` (default) | vector | cell array of character vectors

Target nodes, specified as `'all'`, a vector of node indices, or a cell array of character vectors containing node names.

Example: `distances(G,[1 2])`

Example: `distances(G,'all',[1 3 5])`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `d = distances(G,'Method','unweighted')`

`'Method'` — Shortest path algorithm

`'auto'` (default) | `'unweighted'` | `'positive'` | `'mixed'`

Shortest path algorithm, specified as the comma-separated pair consisting of `'Method'` and one of the options in the table.

Option	Description
`'auto'` (default)	The `'auto'` option automatically selects the algorithm: • `'unweighted'` is used for `graph` and `digraph` inputs with no edge weights. • `'positive'` is used for all `graph` inputs that have edge weights, and requires the weights to be nonnegative.

Option	Description
	This option is also used for `digraph` inputs with nonnegative edge weights. • `'mixed'` is used for `digraph` inputs whose edge weights contain some negative values. The graph cannot have negative cycles.
`'unweighted'`	Breadth-First computation that treats all edge weights as `1`.
`'positive'`	Dijkstra algorithm that requires all edge weights to be nonnegative.
`'mixed'` (only for `digraph`)	Bellman-Ford algorithm for directed graphs that requires the graph to have no negative cycles. While `'mixed'` is slower than `'positive'` for the same problem, `'mixed'` is more versatile as it allows some edge weights to be negative.

Note: For most graphs, `'unweighted'` is the fastest algorithm, followed by `'positive'`, and `'mixed'`.

Example: `distances(G,s,t,'Method','unweighted')`

Output Arguments

d — Shortest path distances between node pairs

matrix

Shortest path distances between node pairs, returned as a matrix. The size of `d` is (# source nodes)-by-(# target nodes). A value of `Inf` indicates a path that does not exist.

Tips

- The `shortestpath`, `shortestpathtree`, and `distances` functions do not support undirected graphs with negative edge weights, or more generally any graph containing a negative cycle, for these reasons:
  - A *negative cycle* is a path that leads from a node back to itself, with the sum of the edge weights on the path being negative. If a negative cycle is on a path between two nodes, then no shortest path exists between the nodes, since a shorter path can always be found by traversing the negative cycle.
  - A single negative edge weight in an undirected graph creates a negative cycle.

See Also

See Also

`digraph` | `graph` | `nearest` | `shortestpath` | `shortestpathtree`

Introduced in R2015b

findedge

Locate edge in graph

Syntax

```
idxOut = findedge(G,s,t)
[sOut,tOut] = findedge(G)
[sOut,tOut] = findedge(G,idx)
```

Description

`idxOut = findedge(G,s,t)` returns the numeric edge indices, `idxOut`, for the edges specified by the source and target node pairs `s` and `t`. The edge indices correspond to the rows `G.Edges.Edge(idxOut,:)` in the `G.Edges` table of the graph. An edge index of `0` indicates an edge that is not in the graph.

`[sOut,tOut] = findedge(G)` returns the source and target node IDs, `sOut` and `tOut`, for all of the edges in graph `G`.

`[sOut,tOut] = findedge(G,idx)` finds the source and target nodes of the edges specified by `idx`.

Examples

Locate Edges with Specified End Nodes

Create a graph, and then determine the edge index for the (1,2) and (3,5) edges.

```
s = [1 1 2 2 2 3 3 3];
t = [2 3 3 4 5 6 7 5];
G = graph(s,t)
```

```
G 
  graph with properties:

    Edges: [8×1 table]
    Nodes: [7×0 table]
```

```
idxOut = findedge(G,[1 3],[2 5])
```

```
idxOut =

     1
     6
```

`idxOut` contains the row index into `G.Edges.EndNodes` for each specified edge.

End Nodes of All Graph Edges

Create a graph, and then determine the end nodes of all edges in the graph.

```
s = {'a' 'a' 'b' 'b' 'c' 'c'};
t = {'b' 'c' 'd' 'e' 'f' 'g'};
G = graph(s,t)
```

```
G =
  graph with properties:

    Edges: [6×1 table]
    Nodes: [7×1 table]
```

```
[sOut,tOut] = findedge(G)
```

```
sOut =

     1
     1
     2
     2
     3
     3


tOut =

     2
     3
     4
     5
```

```
     6
     7
```

Locate Edges with Specified Edge Indices

Create a graph, and then determine the end nodes for the edges whose indices are 3 and 7.

```
s = [1 1 1 1 2 2 3 3 4 4];
t = [2 3 4 5 6 7 8 9 10 11];
G = digraph(s,t)
```

```
G = 
  digraph with properties:

    Edges: [10×1 table]
    Nodes: [11×0 table]
```

```
[sOut,tOut] = findedge(G,[3 7])
```

```
sOut = 

     1
     3


tOut = 

     4
     8
```

Determine Weight of Specified Edge

Create a graph.

```
s = [1 1 2 3];
t = [2 3 3 4];
weights = [10 20 30 40];
G = graph(s,t,weights)
```

```
G = 
```

```
  graph with properties:

    Edges: [4×2 table]
    Nodes: [4×0 table]
```

Find the weight of the (1,3) edge, using `findedge` to retrieve the index.

```
G.Edges.Weight(findedge(G,1,3))
```

```
ans = 20
```

Input Arguments

`G` — Input graph

`graph` object | `digraph` object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

`s,t` — Node pairs

scalars | vectors | character vectors | cell arrays of character vectors

Node pairs, specified as scalars, vectors, character vectors, or cell arrays of character vectors. Similarly located elements in `s` and `t` specify the source and target nodes that form edges in the graph.

Example: `G = findedge(G,[1 2],[3 4])`

Example: `G = findedge(G,{'a' 'a'; 'b' 'c'},{'b' 'c'; 'c' 'e'})`

`idx` — Edge indices

scalar | vector

Edge indices, specified as a scalar or vector of positive integers. The edge index corresponds to a row in the `G.Edges` table of the graph, `G.Edges(idx,:)`.

Output Arguments

`idxOut` — Edge indices

scalar | vector

Edge indices, returned as a scalar or vector of nonnegative integers. The edge indices correspond to rows in the `G.Edges` table of the graph, `G.Edges(idxOut,:)`. An edge index of `0` indicates an edge that is not in the graph.

`sOut,tOut` — Node IDs

scalars | vectors

Node IDs, returned as separate scalars or vectors of positive integers. Similarly located elements in `sOut` and `tOut` specify the source and target nodes that form the edges `G.Edges(idx,:)`.

See Also

See Also

`digraph` | `findnode` | `graph` | `numedges`

Topics

"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"

Introduced in R2015b

findnode

Locate node in graph

Syntax

```
k = findnode(G,nodeID)
```

Description

`k = findnode(G,nodeID)` returns the numeric node ID, `k`, of the node in graph `G` whose name is `nodeID`. The numeric node ID is zero if the node is not in the graph.

Examples

Determine Index of Named Node

Create a graph, and then determine the numeric node index for the nodes named `'AB'` and `'BC'`.

```
s = {'AA' 'AA' 'AA' 'AB' 'AC' 'BB'};
t = {'BA' 'BB' 'BC' 'BA' 'AB' 'BC'};
G = graph(s,t)
```

```
G 
  graph with properties:

    Edges: [6×1 table]
    Nodes: [6×1 table]
```

```
k = findnode(G,{'AB' 'BC'})
```

```
k 

     5
     4
```

`k` contains the row index into `G.Nodes.Name` for each specified node.

Input Arguments

`G` — Input graph

`graph` object | `digraph` object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

`nodeID` — Node names

character vector | cell array of character vectors

Node names, specified as a character vector or cell array of character vectors.

Example: `k = findnode(G,'Chicago')` returns the numeric node ID for the node in graph `G` with the name, `'Chicago'`.

Data Types: `char` | `cell`

Output Arguments

`k` — Numeric node IDs

scalar | column vector

Numeric node IDs, returned as a scalar or column vector. The values of `k` are indices into `G.Nodes.Name`, which is a cell array of character vectors containing the node names.

See Also

See Also

`digraph` | `findedge` | `graph` | `numnodes`

Topics

"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"

Introduced in R2015b

incidence

Graph incidence matrix

Syntax

```
I = incidence(G)
```

Description

`I = incidence(G)` returns the sparse incidence matrix for graph `G`. If `s` and `t` are the node IDs of the source and target nodes of the `j`th edge in `G`, then `I(s,j) = -1` and `I(t,j) = 1`. That is, each column of `I` indicates the source and target nodes for a single edge in `G`.

Examples

Graph Incidence Matrix

Create a graph using an edge list, and then calculate the graph incidence matrix.

```
s = [1 1 1 1 1];
t = [2 3 4 5 6];
G = graph(s,t);
I = incidence(G)
```

```
I =
   (1,1)       -1
   (2,1)        1
   (1,2)       -1
   (3,2)        1
   (1,3)       -1
   (4,3)        1
   (1,4)       -1
   (5,4)        1
   (1,5)       -1
   (6,5)        1
```

Each column in `I` contains two nonzero entries, which indicate the end nodes of a single edge in `G`.

Calculate the graph Laplacian matrix, `L`, and confirm the relation `L = I*I'` for undirected graphs.

```
L = laplacian(G);
L - I*I'
```

```
ans =
   All zero sparse: 6×6
```

Incidence Matrix of Directed Graph

Create a directed graph using an edge list, and then calculate the incidence matrix.

```
s = [1 2 1 3 2 3 3 3];
t = [2 1 3 1 3 4 5 6];
G = digraph(s,t)
```

```
G =
  digraph with properties:

    Edges: [8×1 table]
    Nodes: [6×0 table]
```

```
I = incidence(G)
```

```
I =
   (1,1)       -1
   (2,1)        1
   (1,2)       -1
   (3,2)        1
   (1,3)        1
   (2,3)       -1
   (2,4)       -1
   (3,4)        1
   (1,5)        1
   (3,5)       -1
```

```
   (3,6)       -1
   (4,6)        1
   (3,7)       -1
   (5,7)        1
   (3,8)       -1
   (6,8)        1
```

Each column in `I` represents the source and target nodes of a single edge in `G`.

Input Arguments

`G` — Input graph

`graph` object | `digraph` object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

Output Arguments

`I` — Incidence matrix

sparse matrix

Incidence matrix, returned as a sparse matrix. The size of `I` is `numnodes(G)`-by-`numedges(G)`. The graph incidence matrix is undefined for graphs with self-loops.

Tips

- The `incidence` function calculates the variety of incidence matrix commonly known as a *signed* or *oriented* incidence matrix. The signed incidence matrix of an undirected graph, `I`, is related to the graph Laplacian matrix, `L`, such that `L == I*I'`.

See Also

See Also

`adjacency` | `digraph` | `graph` | `laplacian`

Introduced in R2015b

isomorphism

Compute equivalence relation between two graphs

Syntax

```
P = isomorphism(G1,G2)
P = isomorphism( ___ ,Name,Value)
```

Description

`P = isomorphism(G1,G2)` computes a graph isomorphism equivalence relation between graphs `G1` and `G2`, if one exists. If no isomorphism exists, then `P` is an empty array.

`P = isomorphism( ___ ,Name,Value)` specifies additional options with one or more name-value pair arguments. For example, you can specify `'NodeVariables'` and a list of node variables to indicate that the isomorphism must preserve these variables to be valid.

Examples

Compute Isomorphism Permutation

Create and plot two directed graphs, and then calculate the isomorphism relation between them.

```
G1 = digraph([1 1 1 2 3 4],[2 3 4 4 4 1]);
G2 = digraph([3 3 3 2 1 4],[1 4 2 3 2 2]);
subplot(1,2,1)
plot(G1)
subplot(1,2,2)
plot(G2)
```

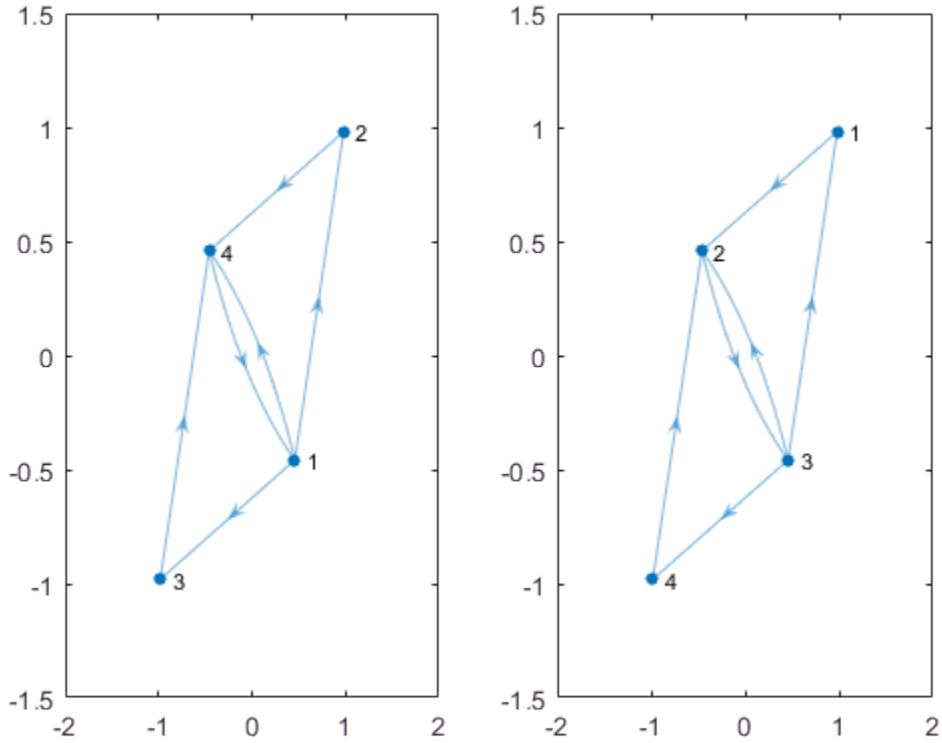


```
p = isomorphism(G1,G2)
```

```
p =

     3
     1
     4
     2
```

The result indicates that `reordernodes(G2,p)` has the same structure as `G1`.

Compute Isomorphism Between Graphs with Different Labels and Layouts

Create and plot two graphs, G1 and G2.

```
G1 = graph([1 1 1 2 2 3 3 4 5 5 7 7],[2 4 5 3 6 4 7 8 6 8 6 8]);
plot(G1,'XData',[1 4 4 1 2 3 3 2],'YData',[4 4 1 1 3 3 2 2])
```

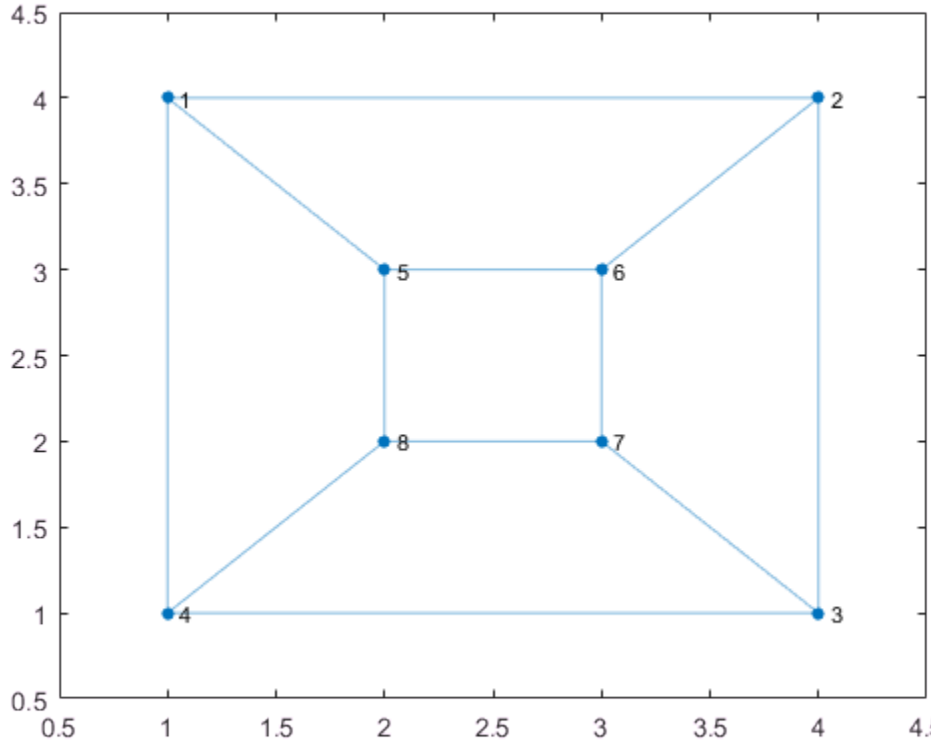


```
G2 = graph({'a' 'a' 'a' 'b' 'b' 'b' 'c' 'c' 'c' 'd' 'd' 'd'}, ...
    {'g' 'h' 'i' 'g' 'h' 'j' 'g' 'i' 'j' 'h' 'i' 'j'});
plot(G2,'XData',[1 2 2 2 1 2 1 1],'YData',[4 4 3 2 3 1 2 1])
```

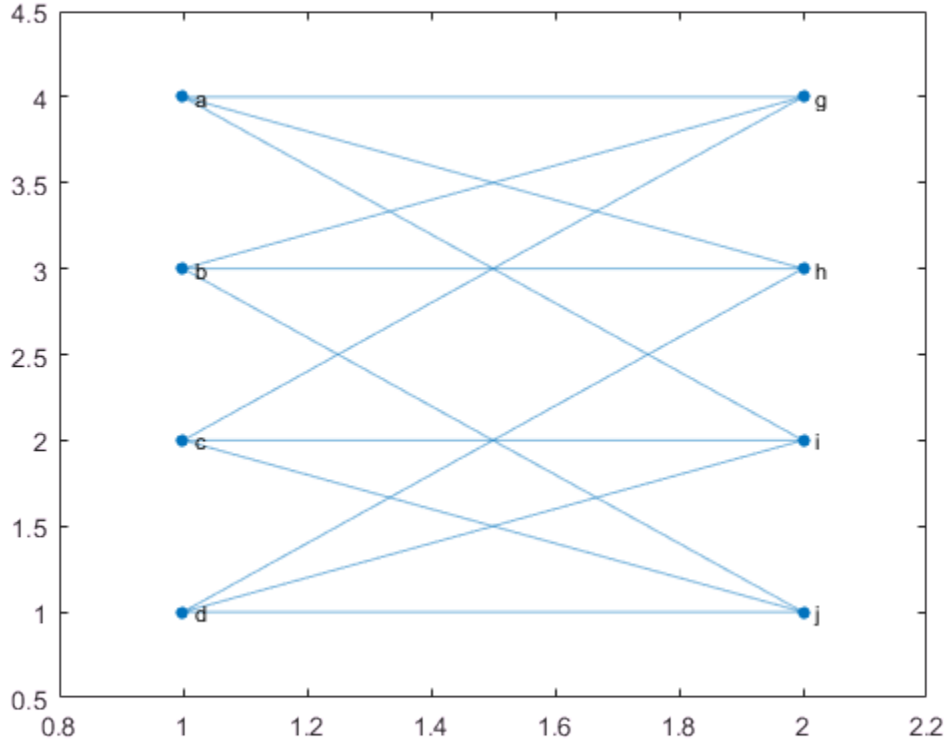

Compute the isomorphism relation between the graphs, if one exists. The result indicates that the graph nodes can be permuted to represent the same graph despite their different labels and layouts.

```
p = isomorphism(G1,G2)
```

```
p =

     1
     2
     5
     3
     4
     7
```

```
6
8
```

Compute Isomorphism and Preserve Node Properties

Compute two different isomorphism relations between two graphs. One of the relations preserves a node property, while the other ignores it.

Create two similar graphs. Add a node property `Color` to each of the graphs.

```
G1 = graph({'d' 'e' 'f'},{'e' 'f' 'd'});
G1.Nodes.Color = {'blue' 'red' 'red'}';

G2 = graph({'a' 'b' 'c'},{'b' 'c' 'a'});
G2.Nodes.Color = {'red' 'red' 'blue'}';
```

Plot the graphs side-by-side in the same figure. Color the nodes red that have `Color = 'red'`.

```
subplot(1,2,1)
p1 = plot(G1);
highlight(p1,{'e' 'f'},'NodeColor','r')

subplot(1,2,2)
p2 = plot(G2);
highlight(p2,{'a' 'b'},'NodeColor','r')
```

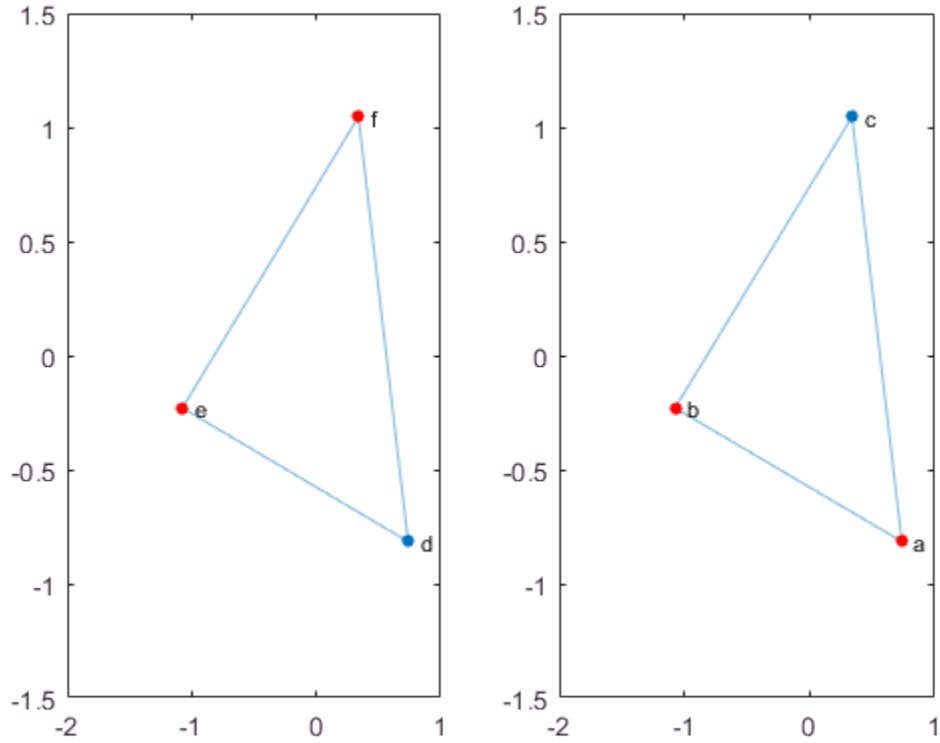

Compute the isomorphism between the graphs, ignoring the `Color` property.

```
p = isomorphism(G1,G2)
```

```
p =

     1
     2
     3
```

Compute the isomorphism again, but this time preserve the value of the `Color` property in the comparison. `isomorphism` returns a different permutation that preserves the `Color` property.

```
p = isomorphism(G1,G2,'NodeVariables','Color')
```

```
p =

     3
     1
     2
```

View the nodes in G1 and G2 that the isomorphism matches together.

```
[G1.Nodes.Name, G2.Nodes.Name(p)]
```

```
ans = 3×2 cell array
    'd'    'c'
    'e'    'a'
    'f'    'b'
```

Input Arguments

G1,G2 — Input graphs (as separate arguments)

graph objects | digraph objects

Input graphs, specified as separate arguments of graph or digraph objects. Use graph to create an undirected graph or digraph to create a directed graph.

G1 and G2 must be both graph objects or both digraph objects.

Example: G1 = graph(1,2)

Example: G1 = digraph([1 2],[2 3])

Name-Value Pair Arguments

Specify optional comma-separated pairs of Name,Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside single quotes (' '). You can specify several name and value pair arguments in any order as Name1,Value1,...,NameN,ValueN.

Example: P = isomorphism(G1,G2,'NodeVariables',{'Var1' 'Var2'})

`'EdgeVariables'` — Edge variables to preserve

character vector | cell array of character vectors

Edge variables to preserve, specified as the comma-separated pair consisting of `'EdgeVariables'` and a character vector or cell array of character vectors. Use this option to specify one or more edge variables that are in both `G1.Edges` and `G2.Edges`. The isomorphism must preserve the specified edge variables in order to be valid.

Data Types: `char` | `cell`

`'NodeVariables'` — Node variables to preserve

character vector | cell array of character vectors

Node variables to preserve, specified as the comma-separated pair consisting of `'NodeVariables'` and a character vector or cell array of character vectors. Use this option to specify one or more node variables that are in both `G1.Nodes` and `G2.Nodes`. The isomorphism must preserve the specified node variables in order to be valid.

Data Types: `char` | `cell`

Output Arguments

`P` — Permutation vector for isomorphism

column vector | `[]`

Permutation vector for isomorphism, returned as a column vector when an isomorphism exists or as the empty array `[]` when an isomorphism does not exist. If `P` is not empty, then `reordernodes(G2,P)` has the same structure as `G1`.

Definitions

Graph Isomorphism

Two graphs, `G1` and `G2`, are isomorphic if there exists a permutation of the nodes `P` such that `reordernodes(G2,P)` has the same structure as `G1`.

Two graphs that are isomorphic have similar structure. For example, if a graph contains one cycle, then all graphs isomorphic to that graph also contain one cycle.

See Also

See Also

`digraph` | `graph` | `isisomorphic` | `reordernodes`

Topics

"Directed and Undirected Graphs"
graph
digraph

Introduced in R2016b

isisomorphic

Determine whether two graphs are isomorphic

Syntax

```
tf = isisomorphic(G1,G2)
tf = isisomorphic(G1,G2,Name,Value)
```

Description

`tf = isisomorphic(G1,G2)` returns logical `1` (`true`) if a graph isomorphism exists between graphs `G1` and `G2`; otherwise, it returns logical `0` (`false`).

`tf = isisomorphic(G1,G2,Name,Value)` specifies additional options with one or more name-value pair arguments. For example, you can specify `'NodeVariables'` and a list of node variables to indicate that the isomorphism must preserve these variables to be valid.

Examples

Compare Graphs

Create and plot two directed graphs, and then determine if they are isomorphic.

```
G1 = digraph([1 1 1 2 3 4],[2 3 4 4 4 1]);
G2 = digraph([3 3 3 2 1 4],[1 4 2 3 2 2]);
subplot(1,2,1)
plot(G1)
subplot(1,2,2)
plot(G2)
```

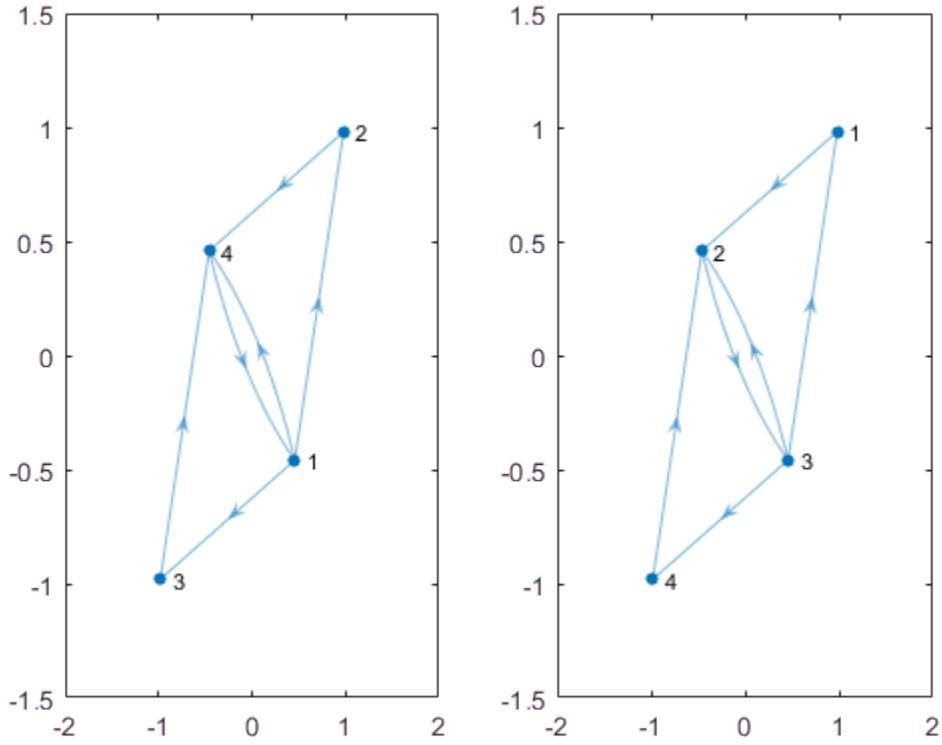


```
isisomorphic(G1,G2)
```

```
ans = logical
   1
```

Compare Graphs with Different Labels and Layouts

Create and plot two graphs, G1 and G2.

```
G1 = graph([1 1 1 2 2 3 3 4 5 5 7 7],[2 4 5 3 6 4 7 8 6 8 6 8]);
plot(G1,'XData',[1 4 4 1 2 3 3 2],'YData',[4 4 1 1 3 3 2 2])
```

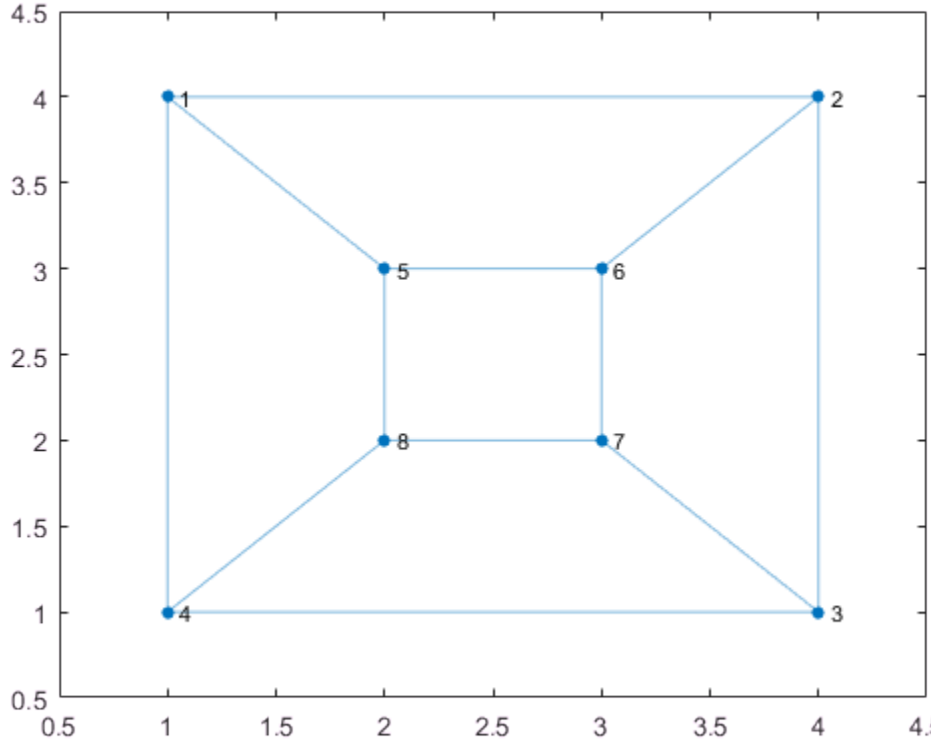


```
G2 = graph({'a' 'a' 'a' 'b' 'b' 'b' 'c' 'c' 'c' 'd' 'd' 'd'}, ...
    {'g' 'h' 'i' 'g' 'h' 'j' 'g' 'i' 'j' 'h' 'i' 'j'});
plot(G2,'XData',[1 2 2 2 1 2 1 1],'YData',[4 4 3 2 3 1 2 1])
```

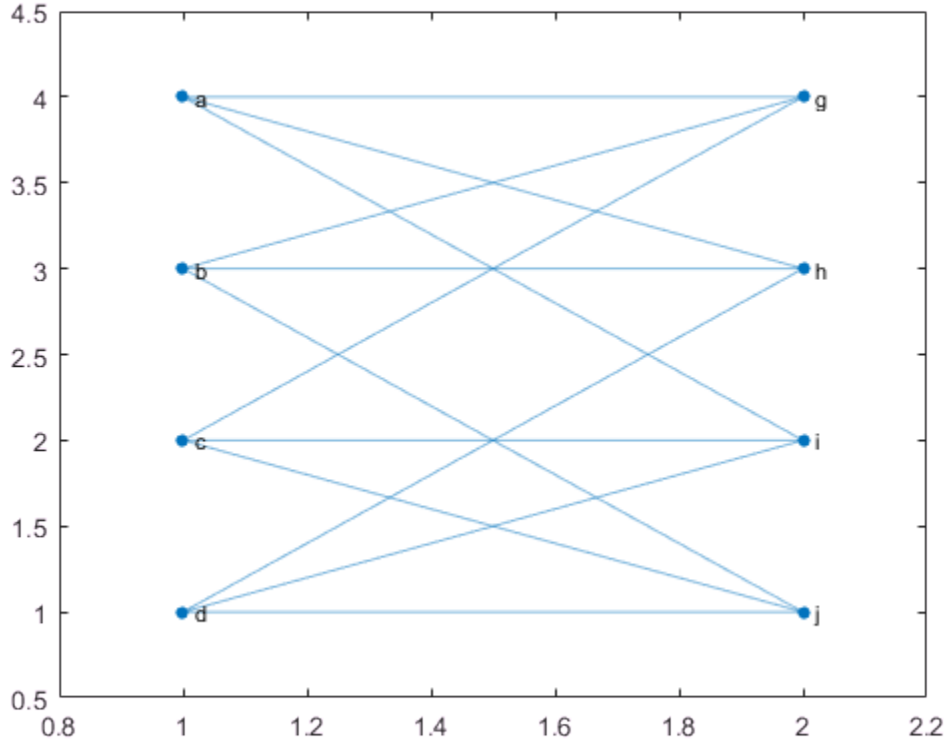

Determine whether an isomorphism exists for `G1` and `G2`. The result indicates that the graphs are structurally the same despite their different labels and layouts.

```
tf = isisomorphic(G1,G2)
```

```
tf = logical
   1
```

Preserve Node Properties in Isomorphism Comparison

Use two different comparisons to determine if there is an isomorphism relation between two graphs. One of the comparisons preserves a node property, while the other ignores it.

Create two similar graphs. Add a node property `Color` to each of the graphs.

```
G1 = graph({'d' 'e' 'f'},{'e' 'f' 'd'});
G1.Nodes.Color = {'red' 'red' 'blue'}';

G2 = graph({'a' 'b' 'c'},{'b' 'c' 'a'});
G2.Nodes.Color = {'blue' 'blue' 'red'}';
```

Plot the graphs side-by-side in the same figure. Color the nodes red that have `Color = 'red'`.

```
subplot(1,2,1)
p1 = plot(G1);
highlight(p1,{'d' 'e'},'NodeColor','r')

subplot(1,2,2)
p2 = plot(G2);
highlight(p2,'c','NodeColor','r')
```

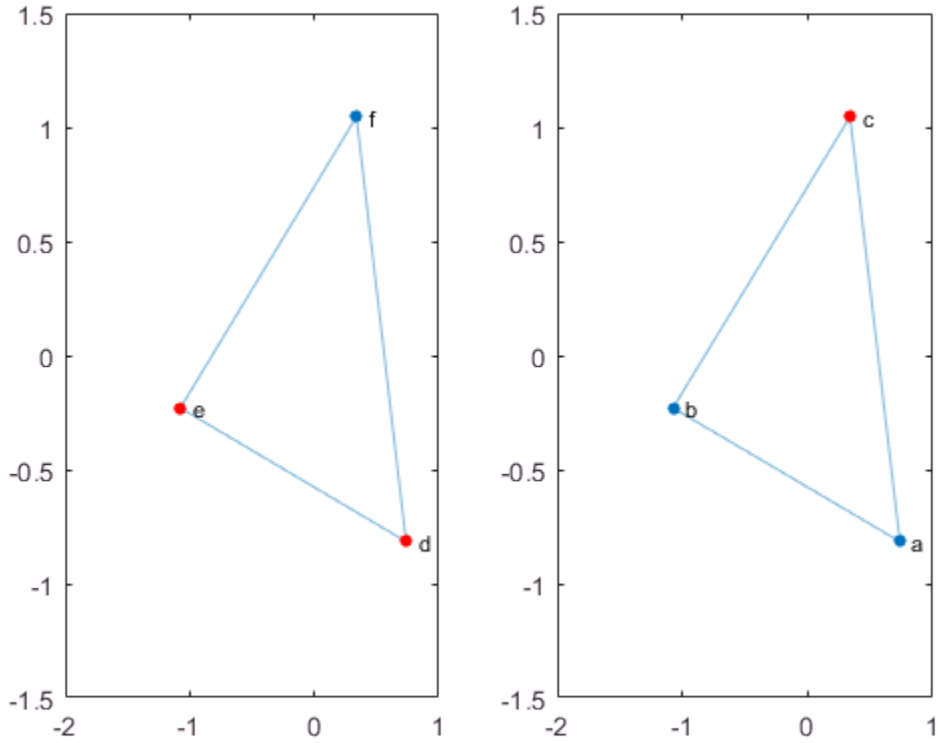

Determine if the graphs are isomorphic, ignoring the `Color` property.

```
tf = isisomorphic(G1,G2)
```

```
tf = logical
   1
```

Determine if the graphs are isomorphic and preserve the value of the `Color` property in the comparison. In this case, there is no isomorphism since the `Color` property of each graph contains different numbers of `'red'` and `'blue'` values.

```
tf = isisomorphic(G1,G2,'NodeVariables','Color')
```

```
tf = logical
```

0

Input Arguments

G1,G2 — Input graphs (as separate arguments)
graph objects | digraph objects

Input graphs, specified as separate arguments of graph or digraph objects. Use graph to create an undirected graph or digraph to create a directed graph.

G1 and G2 must be both graph objects or both digraph objects.

Example: G1 = graph(1,2)

Example: G1 = digraph([1 2],[2 3])

Name-Value Pair Arguments

Specify optional comma-separated pairs of Name,Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside single quotes (' '). You can specify several name and value pair arguments in any order as Name1,Value1,...,NameN,ValueN.

Example: tf = isisomorphic(G1,G2,'NodeVariables',{'Var1' 'Var2'})

'EdgeVariables' — Edge variables to preserve
character vector | cell array of character vectors

Edge variables to preserve, specified as the comma-separated pair consisting of 'EdgeVariables' and a character vector or cell array of character vectors. Use this option to specify one or more edge variables that are in both G1.Edges and G2.Edges. The isomorphism comparison must preserve the specified edge variables in order to be valid.

Data Types: char | cell

'NodeVariables' — Node variables to preserve
character vector | cell array of character vectors

Node variables to preserve, specified as the comma-separated pair consisting of 'NodeVariables' and a character vector or cell array of character vectors. Use this

option to specify one or more node variables that are in both `G1.Nodes` and `G2.Nodes`. The isomorphism comparison must preserve the specified node variables in order to be valid.

Data Types: `char` | `cell`

Definitions

Graph Isomorphism

Two graphs, `G1` and `G2`, are isomorphic if there exists a permutation of the nodes `P` such that `reordernodes(G2,P)` has the same structure as `G1`.

Two graphs that are isomorphic have similar structure. For example, if a graph contains one cycle, then all graphs isomorphic to that graph also contain one cycle.

See Also

See Also

`digraph` | `graph` | `isomorphism` | `reordernodes`

Topics

"Directed and Undirected Graphs"
graph
digraph

Introduced in R2016b

laplacian

Graph Laplacian matrix

Syntax

```
L = laplacian(G)
```

Description

`L = laplacian(G)` returns the graph Laplacian matrix, `L`. Each diagonal entry, `L(j,j)`, is given by the degree of node `j`, `degree(G,j)`. The off-diagonal entries of `L` represent the edges in `G` such that `L(i,j) = L(j,i) = -1` if there is an edge between nodes `i` and `j`; otherwise, `L(i,j) = L(j,i) = 0`.

Examples

Graph Laplacian Matrix

Create a graph using an edge list, and then calculate the graph Laplacian matrix.

```
s = [1 1 1 1 1];
t = [2 3 4 5 6];
G = graph(s,t);
L = laplacian(G)
```

```
L =
   (1,1)        5
   (2,1)       -1
   (3,1)       -1
   (4,1)       -1
   (5,1)       -1
   (6,1)       -1
   (1,2)       -1
   (2,2)        1
   (1,3)       -1
```

```
   (3,3)        1
   (1,4)       -1
   (4,4)        1
   (1,5)       -1
   (5,5)        1
   (1,6)       -1
   (6,6)        1
```

The diagonal elements of `L` indicate the degree of the nodes, such that `L(j,j)` is the degree of node `j`.

Calculate the graph incidence matrix, `I`, and confirm the relation `L = I*I'`.

```
I = incidence(G);
L - I*I'
```

```
ans =
   All zero sparse: 6×6
```

Input Arguments

G — Input graph

`graph` object

Input graph, specified as a `graph` object. Use the `graph` function to create an undirected graph object. For more information, see graph.

Example: `G = graph(1,2)`

Output Arguments

L — Laplacian matrix

matrix

Laplacian matrix. `L` is a square, symmetric, sparse matrix of size `numnodes(G)`-by-`numnodes(G)`. The graph Laplacian matrix is undefined for graphs with self-loops.

See Also

See Also

`adjacency` | `graph` | `incidence`

Introduced in R2015b

maxflow

Maximum flow in graph

Syntax

```
mf = maxflow(G,s,t)
mf = maxflow(G,s,t,algorithm)
[mf,GF] = maxflow( ___ )
[mf,GF,cs,ct] = maxflow( ___ )
```

Description

`mf = maxflow(G,s,t)` returns the maximum flow between nodes `s` and `t`. If graph `G` is unweighted (that is, `G.Edges` does not contain the variable `Weight`), then `maxflow` treats all graph edges as having a weight equal to 1.

`mf = maxflow(G,s,t,algorithm)` specifies the maximum flow algorithm to use. This syntax is only available if `G` is a directed graph.

`[mf,GF] = maxflow( ___ )` also returns a directed graph object, `GF`, using any of the input arguments in previous syntaxes. `GF` is formed using only the edges in `G` that have nonzero flow values.

`[mf,GF,cs,ct] = maxflow( ___ )` additionally returns the source and target node IDs, `cs` and `ct`, representing the minimum cut associated with the maximum flow.

Examples

Maximum Flow in Graph

Create and plot a weighted graph. The weighted edges represent flow capacities.

```
s = [1 1 2 2 3 4 4 4 5 5];
t = [2 3 3 4 5 3 5 6 4 6];
weights = [0.77 0.44 0.67 0.75 0.89 0.90 2 0.76 1 1];
```

```
G = digraph(s,t,weights);
plot(G,'EdgeLabel',G.Edges.Weight,'Layout','layered');
```

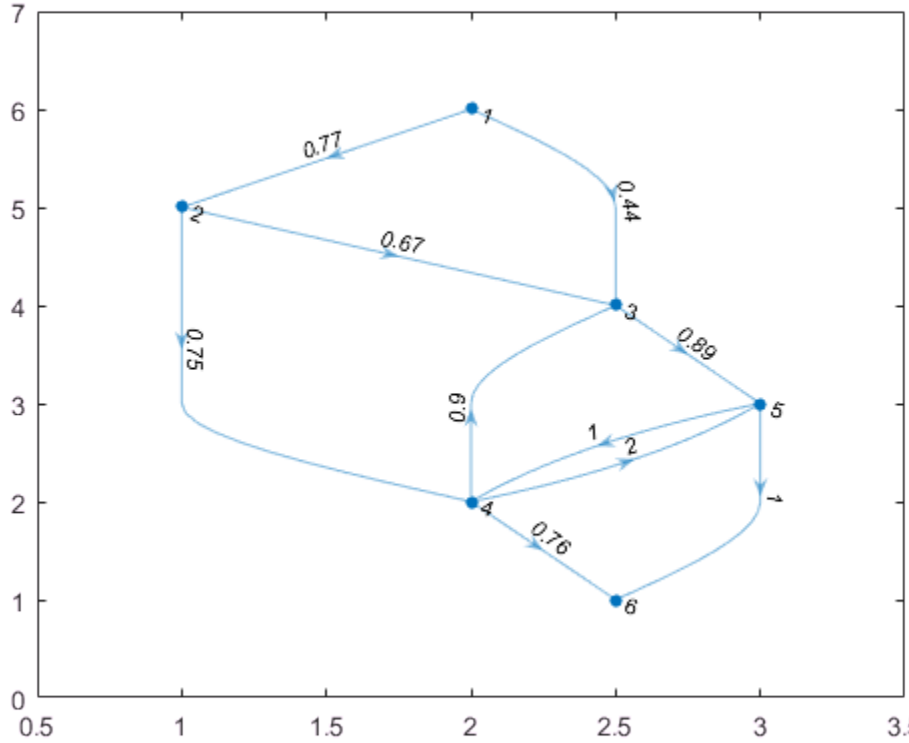

Determine the maximum flow from node 1 to node 6.

```
mf = maxflow(G,1,6)
```

```
mf = 1.2100
```

Maximum Flow with Specified Algorithm

Create and plot a graph. The weighted edges represent flow capacities.

```
s = [1 1 2 2 3 3 4];
```

```
t = [2 3 3 4 4 5 5];
weights = [10 6 15 5 10 3 8];
G = digraph(s,t,weights);
H = plot(G,'EdgeLabel',G.Edges.Weight);
```

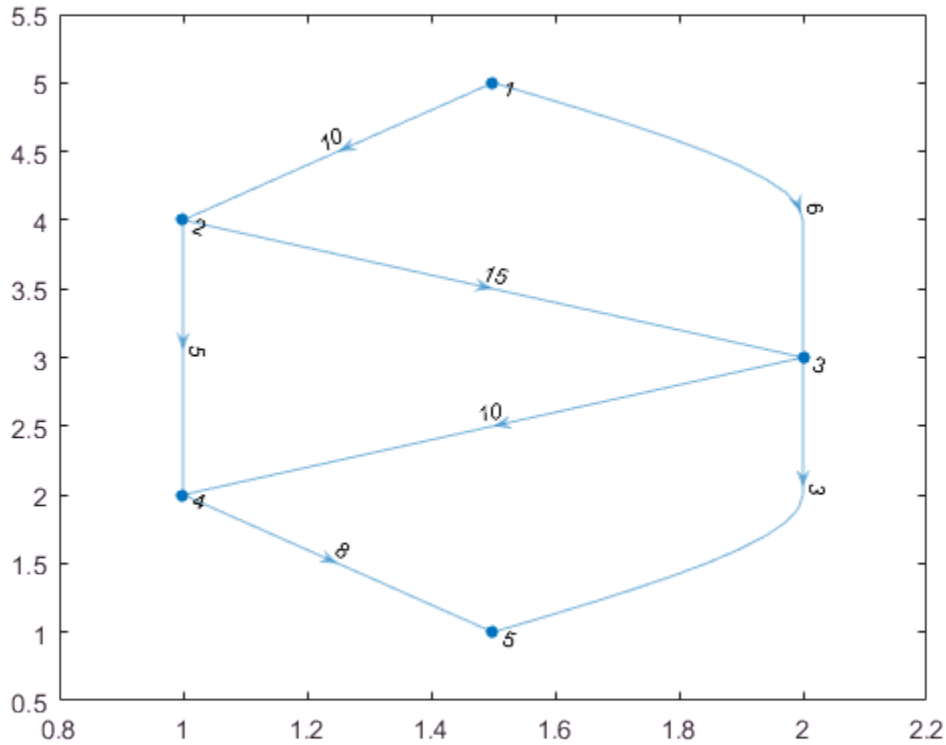

Find the maximum flow value between node 1 and node 5. Specify `'augmentpath'` to use the Ford-Fulkerson algorithm, and use two outputs to return a graph of the nonzero flows.

```
[mf,GF] = maxflow(G,1,5,'augmentpath')
```

```
mf = 11

GF =
```

```
digraph with properties:

  Edges: [6×2 table]
  Nodes: [5×0 table]
```

Highlight and label the graph of nonzero flows.

```
H.EdgeLabel = {};
highlight(H,GF,'EdgeColor','r','LineWidth',2);
st = GF.Edges.EndNodes;
labeledge(H,st(:,1),st(:,2),GF.Edges.Weight);
```

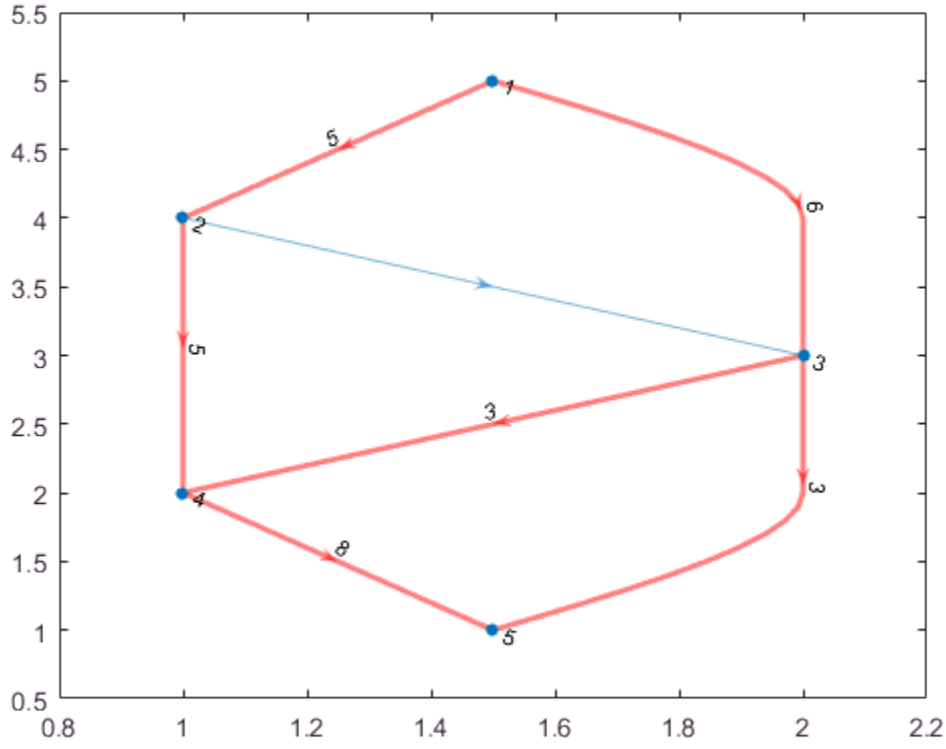

Minimum Cut Computation

Create and plot a weighted graph. The edge weights represent flow capacities.

```
s = [1 1 2 3 3 4 4 5 5];
t = [2 3 3 2 5 5 6 4 6];
weights = [0.77 0.44 0.67 0.69 0.73 2 0.78 1 1];
G = digraph(s,t,weights);
plot(G,'EdgeLabel',G.Edges.Weight,'Layout','layered')
```

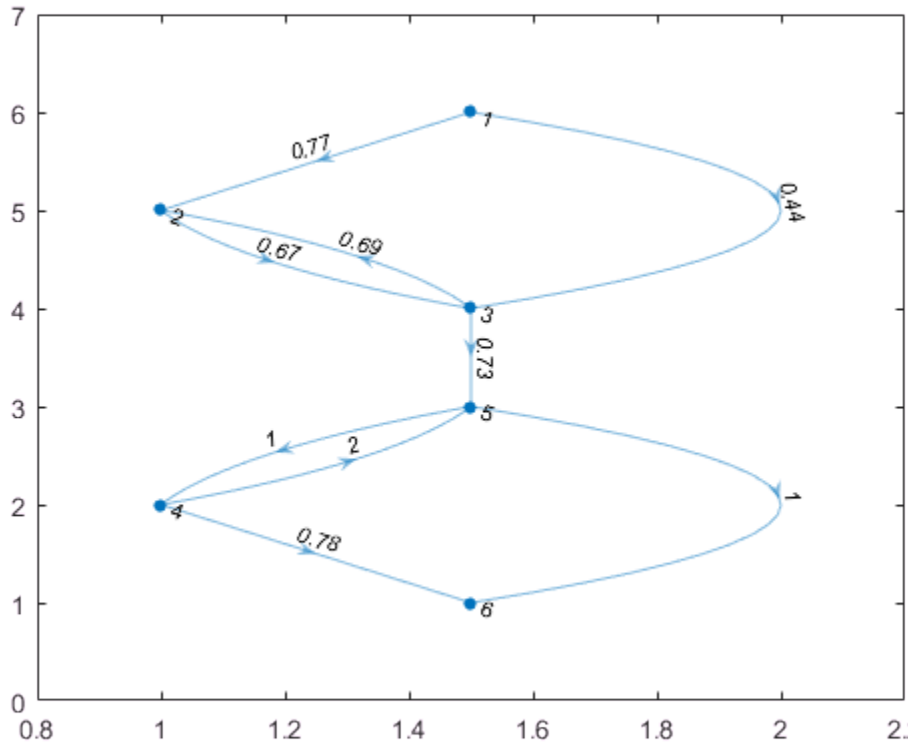

Find the maximum flow and minimum cut of the graph.

```
[mf,~,cs,ct] = maxflow(G,1,6)
```

```
mf = 0.7300

cs =

     1
     2
     3


ct =

     4
     5
     6
```

Plot the minimum cut, using the `cs` nodes as sources and the `ct` nodes as sinks. Highlight the `cs` nodes as red and the `ct` nodes as green. Note that the weight of the edge that connects these two sets of nodes is equal to the maximum flow.

```
H = plot(G,'Layout','layered','Sources',cs,'Sinks',ct, ...
    'EdgeLabel',G.Edges.Weight);
highlight(H,cs,'NodeColor','red')
highlight(H,ct,'NodeColor','green')
```

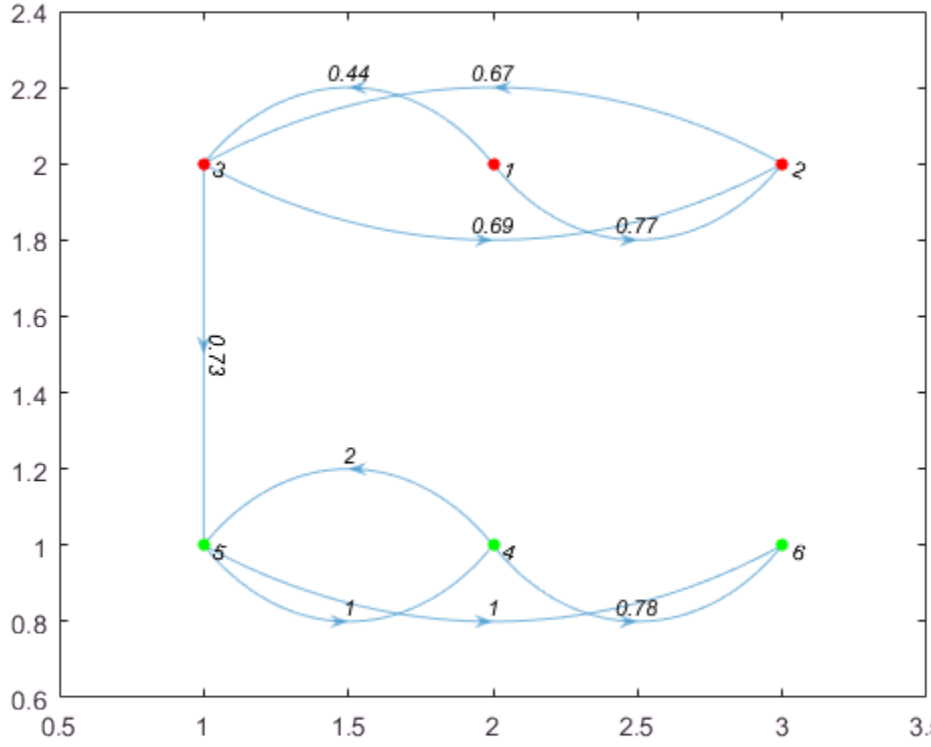

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: `G = digraph([1 2],[2 3])`

`s,t` — Node pair (as separate arguments)

scalars | character vectors

Node pair, specified as separate arguments of scalar node indices or character vector node names.

Example: `mf = maxflow(G,'A','B')`

Example: `mf = maxflow(G,1,10)`

Data Types: `double` | `char`

`algorithm` — Maximum flow algorithm

`'searchtrees'` (default) | `'augmentpath'` | `'pushrelabel'`

Maximum flow algorithm, specified as one of the entries in the table.

Note: You can only specify nondefault `algorithm` options with a directed graph.

Option	Description
`'searchtrees'` (default)	Uses the Boykov-Kolmogorov algorithm. Computes the maximum flow by constructing two search trees associated with nodes `s` and `t`.
`'augmentpath'`	Uses the Ford-Fulkerson algorithm. Computes the maximum flow iteratively by finding an augmenting path in a residual directed graph. The directed graph cannot have any parallel edges of opposite direction between the same two nodes, unless the weight of one of those edges is zero. So if the graph contains edge `[i j]`, then it can contain the reverse edge `[j i]` only if the weight of `[i j]` is zero and/or the weight of `[j i]` is zero.

Option	Description
`'pushrelabel'`	Computes the maximum flow by pushing a node's excess flow to its neighbors and then relabeling the node. The directed graph cannot have any parallel edges of opposite direction between the same two nodes, unless the weight of one of those edges is zero. So if the graph contains edge `[i j]`, then it can contain the reverse edge `[j i]` only if the weight of `[i j]` is zero and/or the weight of `[j i]` is zero.

Example: `mf = maxflow(G,'A','D','augmentpath')`

Output Arguments

`mf` — Maximum flow

scalar

Maximum flow, returned as a scalar.

`GF` — Directed graph of flows

`digraph` object

Directed graph of flows, returned as a `digraph` object. `GF` contains the same nodes as `G`, but only contains those edges of `G` that have a nonzero flow.

`cs` — Minimum cut source node IDs

scalar | vector | character vector | cell array of character vectors

Minimum cut source node IDs, returned as a scalar node index, vector of node indices, character vector node name, or cell array of character vectors containing node names.

- If `s` and `t` specify numeric node indices, then `cs` and `ct` also contain node indices.
- If `s` and `t` specify node names, then `cs` and `ct` also contain node names.

`ct` — Minimum cut target node IDs

scalar | vector | character vector | cell array of character vectors

Minimum cut target node IDs, returned as a scalar node index, vector of node indices, character vector node name, or cell array of character vectors containing node names.

- If `s` and `t` specify numeric node indices, then `cs` and `ct` also contain node indices.
- If `s` and `t` specify node names, then `cs` and `ct` also contain node names.

Definitions

Maximum Flow

In the context of maximum flow, the edges in a graph are considered to have a *capacity* as represented by the edge weight. The capacity of an edge is the amount of flow that can pass through that edge. Therefore, the maximum flow between two nodes in a graph maximizes the amount of flow passing from the source node, `s`, to the target node, `t`, based on the capacities of the connecting edges.

Minimum Cut

A minimum cut partitions the directed graph nodes into two sets, `cs` and `ct`, such that the sum of the weights of all edges connecting `cs` and `ct` (weight of the cut) is minimized. The weight of the minimum cut is equal to the maximum flow value, `mf`.

The entries in `cs` and `ct` indicate the nodes of `G` associated with nodes `s` and `t`, respectively. `cs` and `ct` satisfy `numel(cs) + numel(ct) = numnodes(G)`.

See Also

See Also

`digraph` | `graph`

Topics

graph
digraph

Introduced in R2015b

minspantree

Minimum spanning tree of graph

Syntax

```
T = minspantree(G)
T = minspantree(G,Name,Value)
[T,pred] = minspantree( ___ )
```

Description

`T = minspantree(G)` returns the minimum spanning tree, `T`, for graph `G`.

`T = minspantree(G,Name,Value)` uses additional options specified by one or more Name-Value pair arguments. For example, `minspantree(G,'Method','sparse')` uses Kruskal's algorithm for calculating the minimum spanning tree.

`[T,pred] = minspantree( ___ )` also returns a vector of predecessor nodes, `pred`, using any of the input arguments in previous syntaxes.

Examples

Minimum Spanning Tree of Cube Graph

Create and plot a cube graph with weighted edges.

```
s = [1 1 1 2 5 3 6 4 7 8 8 8];
t = [2 3 4 5 3 6 4 7 2 6 7 5];
weights = [100 10 10 10 10 20 10 30 50 10 70 10];
G = graph(s,t,weights);
p = plot(G,'EdgeLabel',G.Edges.Weight);
```

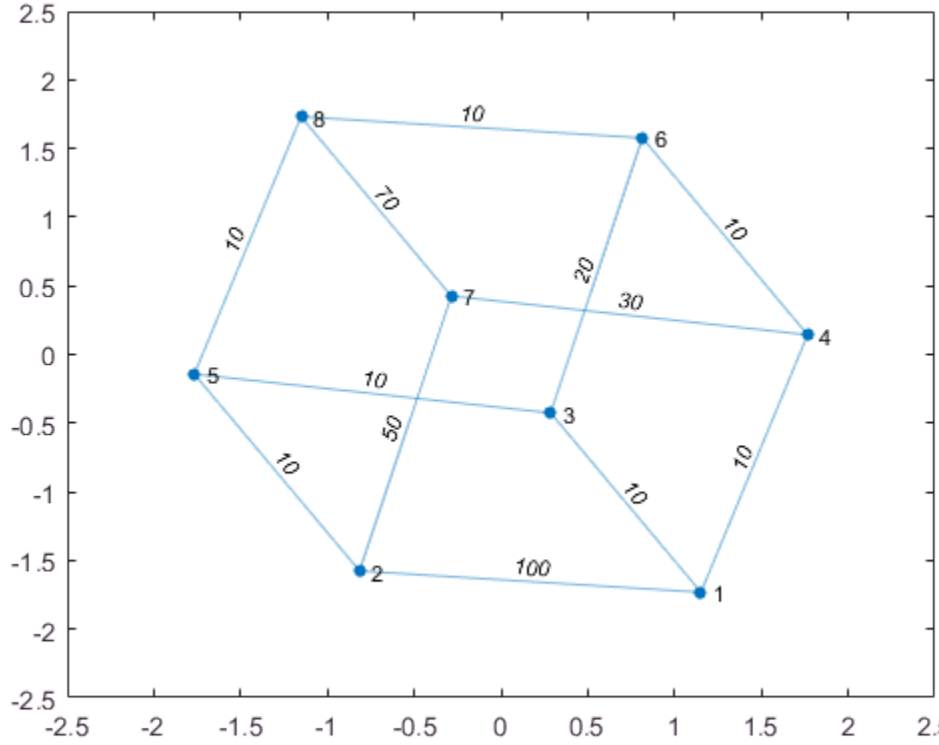

Calculate and plot the minimum spanning tree of the graph on top of the graph. `T` contains the same nodes as `G`, but a subset of the edges.

```
[T,pred] = minspantree(G);
highlight(p,T)
```

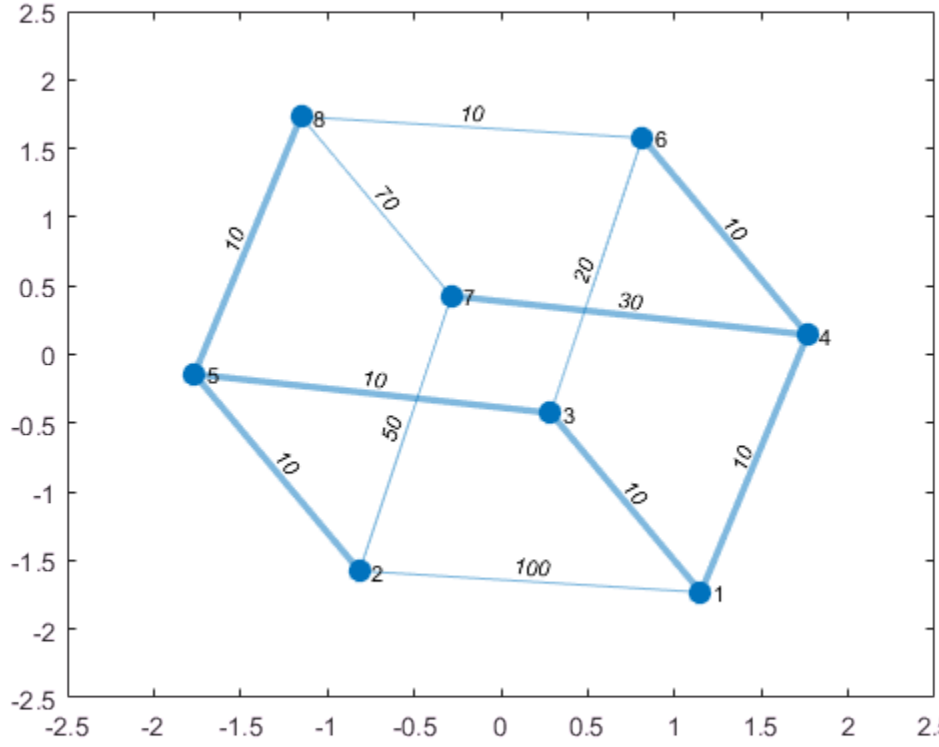

Minimum Spanning Forest from Specified Root Node

Create and plot a graph that has multiple components.

```
s = {'a' 'a' 'a' 'b' 'b' 'c' 'e' 'e' 'f' 'f' 'f' 'f' 'g' 'g'};
t = {'b' 'c' 'd' 'c' 'd' 'd' 'f' 'g' 'g' 'h' 'i' 'j' 'i' 'j'};
G = graph(s,t);
p = plot(G,'Layout','layered');
```

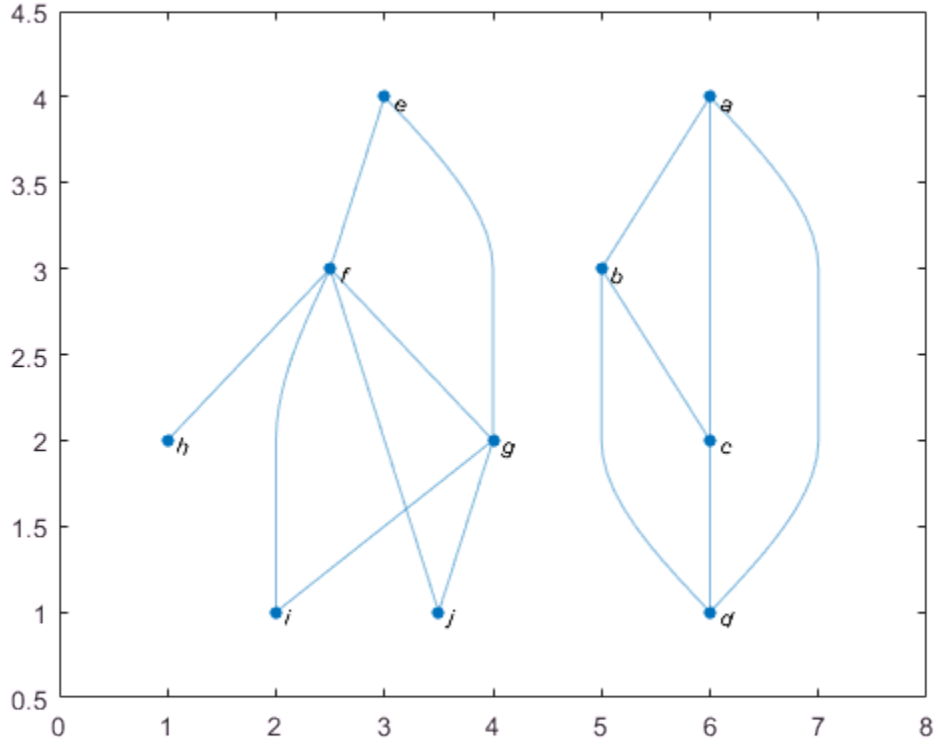

Find the minimum spanning forest for the graph, starting at node `i`. Highlight the resulting forest in the plot. The graph node names are carried over into the minimum spanning tree graph.

```
[T,pred] = minspantree(G,'Type','forest','Root',findnode(G,'i'));
highlight(p,T)
```

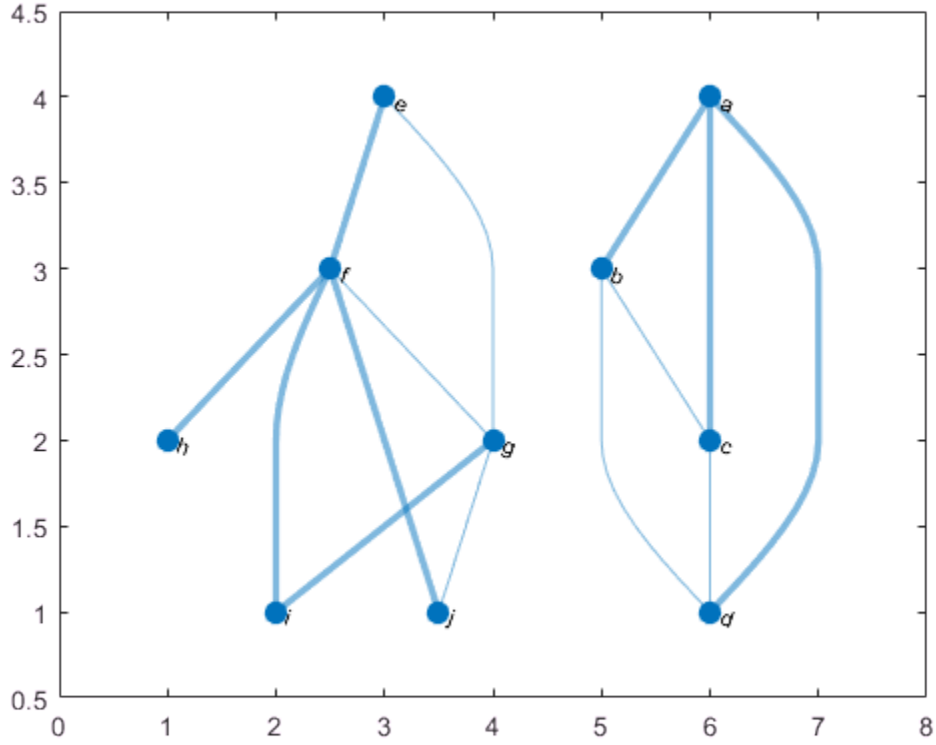

Use the vector of predecessor nodes, `pred`, to create a directed version of the minimum spanning forest. All of the edges in this tree are directed away from the root nodes in each component (nodes `i` and `a`).

```
rootedTree = digraph(pred(pred~=0),find(pred~=0),[],G.Nodes.Name);
plot(rootedTree)
```

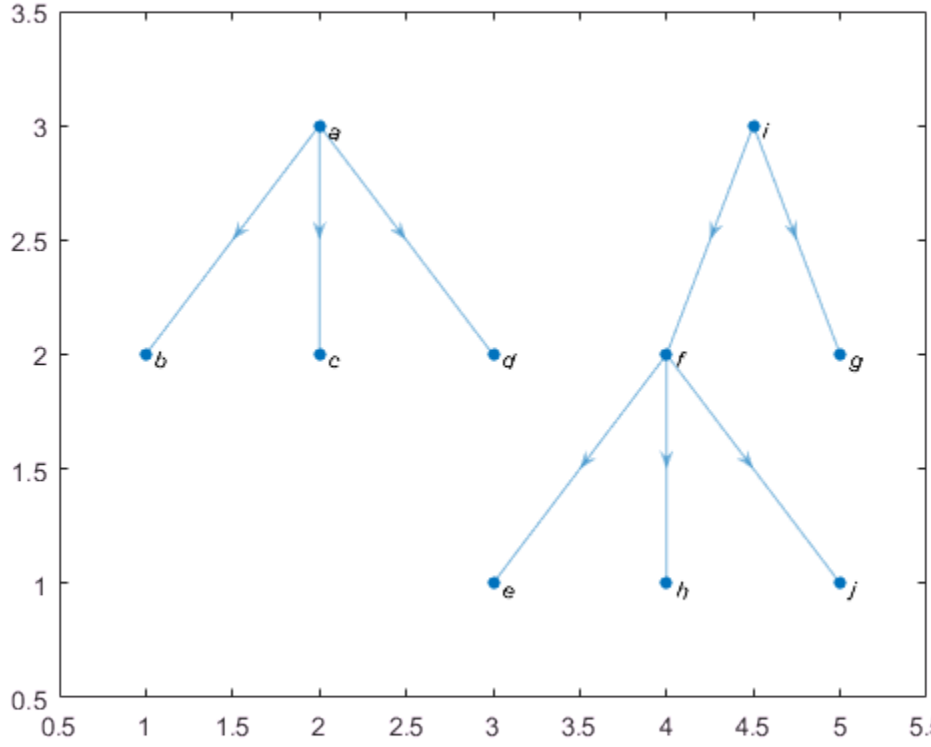

Input Arguments

G — Input graph

graph object

Input graph, specified as a graph object. Use the graph function to create an undirected graph object. For more information, see graph.

Example: G = graph(1,2)

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `[T,pred] = minspantree(G,'Method','sparse')`

`'Method'` — Minimum spanning tree algorithm

`'dense'` (default) | `'sparse'`

Minimum spanning tree algorithm, specified as the comma-separated pair consisting of `'Method'` and one of the options in the table.

Option	Description
`'dense'` (default)	Prim's algorithm. This algorithm starts at the root node and adds edges to the tree while traversing the graph.
`'sparse'`	Kruskal's algorithm. This algorithm sorts all of the edges by weight, and then adds them to the tree if they do not create a cycle.

`'Root'` — Root node

`1` (default) | positive scalar node index | character vector node name

Root node, specified as the comma-separated pair consisting of `'Root'` and a positive scalar node index or character vector node name. The default root node is `1`.

- If `'Method'` is `'dense'` (default), then the root node is the starting node.
- If `'Method'` is `'sparse'`, then the root node is used only to compute `pred`, the vector of predecessor nodes.

`'Type'` — Type of minimum spanning tree

`'tree'` (default) | `'forest'`

Type of minimum spanning tree, specified as the comma-separated pair consisting of `'Type'` and one of the options in the table.

Option	Description
`'tree'`	Only a single tree is returned. The tree contains the root node.
`'forest'`	A forest of minimum spanning trees is returned. In other words, specify `'forest'` to calculate the minimum spanning tree of all connected components in the graph.

Output Arguments

`T` — Minimum spanning tree
`graph` object

Minimum spanning tree, returned as a `graph` object.

`pred` — Predecessor nodes
vector

Predecessor nodes, returned as a vector of node indices. `pred(I)` is the node index of the predecessor of node `I`. By convention, `pred(rootNode) = 0`. If `Type` is `'tree'`, then `pred(I) = NaN` for all nodes `I` that are not in the same component as the root node.

`pred` specifies a directed version of the minimum spanning tree, with all edges directed away from the root node.

Definitions

Minimum Spanning Tree

For connected graphs, a spanning tree is a subgraph that connects every node in the graph, but contains no cycles. There can be many spanning trees for any given graph. By assigning a weight to each edge, the different spanning trees are assigned a number for the total weight of their edges. The minimum spanning tree is then the spanning tree whose edges have the least total weight.

For graphs with equal edge weights, all spanning trees are minimum spanning trees, since traversing `n` nodes requires `n-1` edges.

See Also

See Also

`conncomp` | `graph` | `shortestpath`

Topics

graph

Introduced in R2015b

nearest

Nearest neighbors within radius

Syntax

```
nodeIDs = nearest(G,s,d)
nodeIDs = nearest(G,s,d,Name,Value)
[nodeIDs,dist] = nearest( ___ )
```

Description

`nodeIDs = nearest(G,s,d)` returns all nodes in graph `G` that are within distance `d` from node `s`. If the graph is weighted (that is, if `G.Edges` contains a variable `Weight`), then those weights are used as the distances along the edges in the graph. Otherwise, all edge distances are taken to be `1`.

`nodeIDs = nearest(G,s,d,Name,Value)` uses additional options specified by one or more name-value pair arguments. For example, if `G` is a weighted graph, then `nearest(G,s,d,'Method','unweighted')` ignores the edge weights in graph `G` and instead treats all edge weights as `1`.

`[nodeIDs,dist] = nearest( ___ )` additionally returns the distance to each of the nearest neighbors, such that `dist(j)` is the distance from source node `s` to the node `nodeIDs(j)`. You can use any of the input argument combinations in previous syntaxes.

Examples

Nearest Nodes

Create and plot a graph with weighted edges.

```
s = [1 1 1 1 1 2 2 2 3 3 3 3 3];
t = [2 4 5 6 7 3 8 9 10 11 12 13 14];
weights = randi([1 10],1,13);
G = graph(s,t,weights);
```

```
p = plot(G,'Layout','force','EdgeLabel',G.Edges.Weight);
```

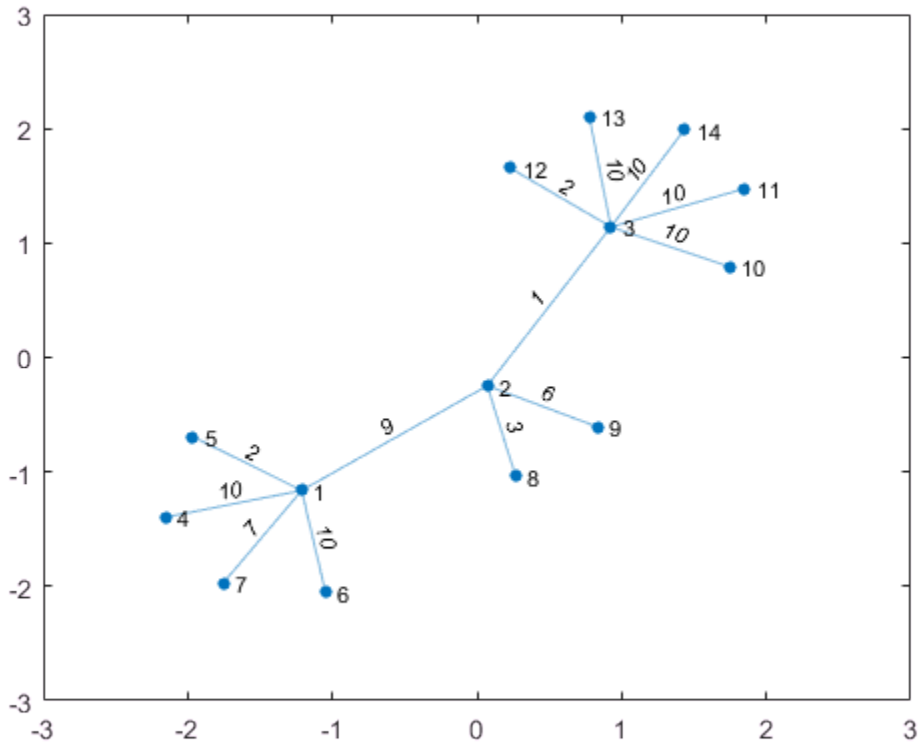

Determine which nodes are within a radius of 15 from node 1.

```
nn = nearest(G,1,15)
```

```
nn =

     5
     7
     2
     3
     4
     6
```

```
     8
    12
     9
```

Highlight the source node as green and the nearest neighbors as red.

```
highlight(p,1,'NodeColor','g')
highlight(p,nn,'NodeColor','r')
```

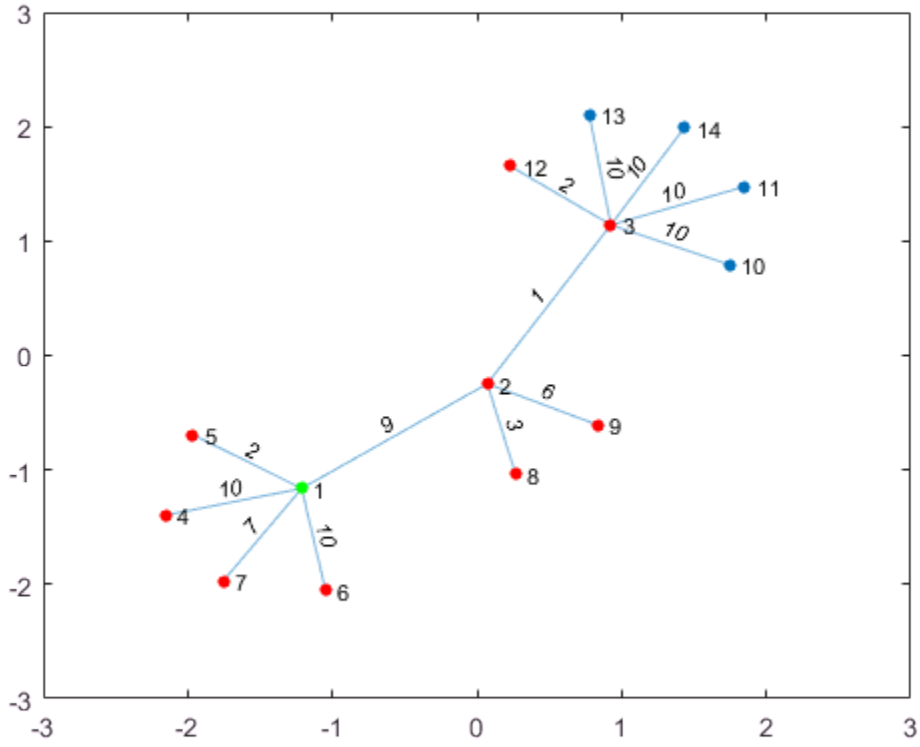

Distances of Nearest Nodes

Create and plot a graph with weighted edges.

```
s = [1 1 1 2 2 6 6 7 7 3 3 9 9 4 4 11 11 8];
t = [2 3 4 5 6 7 8 5 8 9 10 5 10 11 12 10 12 12];
weights = [10 10 10 10 10 1 1 1 1 1 1 1 1 1 1 1 1 1];
G = graph(s,t,weights);
plot(G,'EdgeLabel',G.Edges.Weight)
```

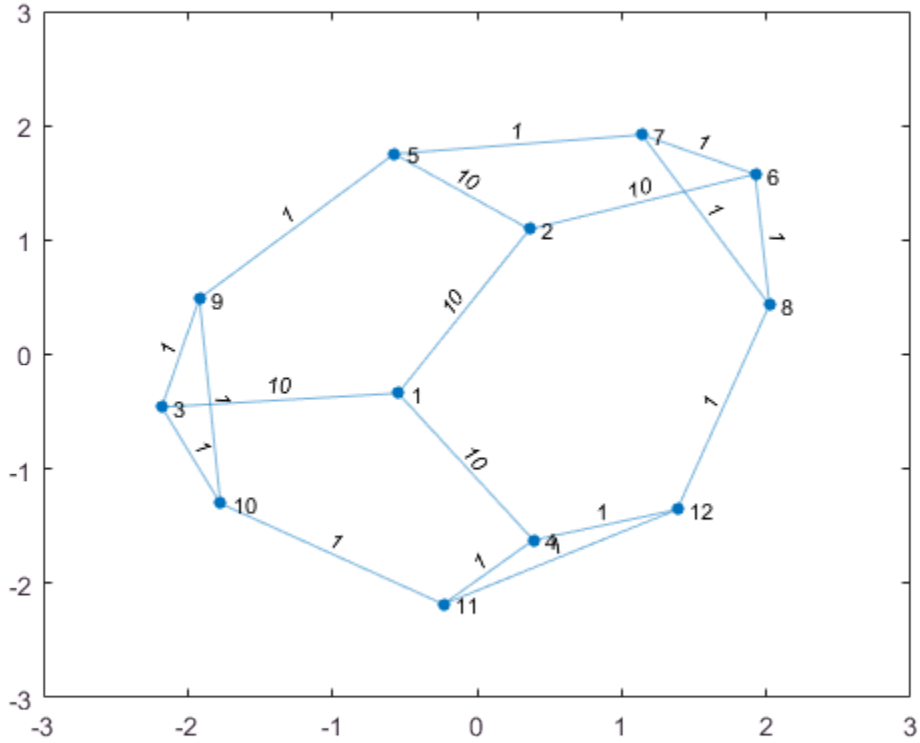

Determine which nodes are within a radius of 5 from node 3, and return the distance to each node.

```
[nn,dist] = nearest(G,3,5)
```

```
nn =
```

```
     9
    10
     5
    11
     4
     7
    12
     6
     8


dist =

     1
     1
     2
     2
     3
     3
     3
     4
     4
```

Incoming Neighbor Distances in Directed Graph

Create and plot a directed graph with weighted edges.

```
s = {'a' 'a' 'a' 'b' 'c' 'c' 'e' 'f' 'f'};
t = {'b' 'c' 'd' 'a' 'a' 'd' 'f' 'a' 'b'};
weights = [1 1 1 2 2 2 2 2 2];
G = digraph(s,t,weights);
plot(G,'EdgeLabel',G.Edges.Weight)
```

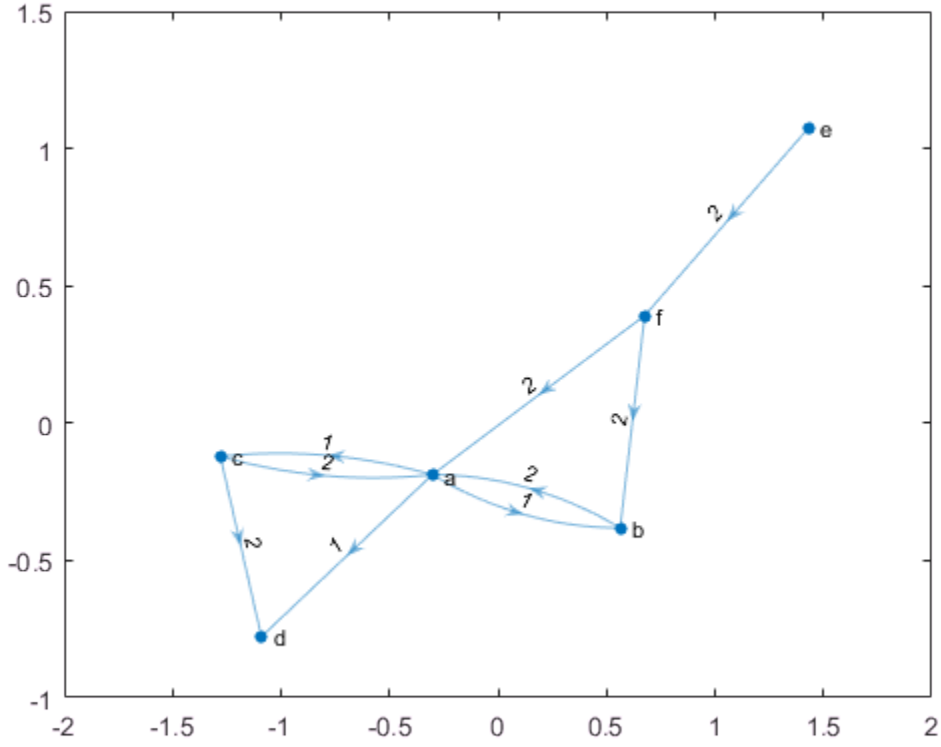

Determine the nearest nodes within a radius of 1 from node `'a'`, measured by outgoing path distance from node `'a'`.

```
nn_out = nearest(G,'a',1)
```

```
nn_out = 3×1 cell array
    'b'
    'c'
    'd'
```

Determine all of the nodes that have incoming paths leading to node `'a'` by specifying the radius as `Inf`.

```
nn_in = nearest(G,'a',Inf,'Direction','incoming')
```

```
nn_in = 4×1 cell array
    'b'
    'c'
    'f'
    'e'
```

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: G = digraph([1 2],[2 3])

s — Source node

numeric node index | character vector node name

Source node, specified as either a numeric node index or a character vector node name.

Example: nearest(G,3,1)

Example: nearest(G,'a',5)

d — Neighbor distance radius

scalar

Neighbor distance radius, specified as a numeric scalar.

Example: nearest(G,3,1)

Example: nearest(G,'a',2.5)

Name-Value Pair Arguments

Specify optional comma-separated pairs of Name,Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `[nodeIDs,dist] = nearest(G,s,5,'Method','unweighted','Direction','incoming')`

`'Direction'` — Direction of distance measurement
`'outgoing'` (default) | `'incoming'`

Note: The `'Direction'` option can only be specified with directed graphs.

Direction of distance measurement, specified as the comma-separated pair consisting of `'Direction'` and one of the options in this table.

Option	Description
`'outgoing'` (default)	Distances are calculated using paths going *out* from source node `s`.
`'incoming'`	Distances are calculated using paths coming *in* to source node `s`.

Example: `nearest(G,s,d,'Direction','incoming')`

`'Method'` — Shortest path algorithm
`'auto'` (default) | `'unweighted'` | `'positive'` | `'mixed'`

Shortest path algorithm, specified as the comma-separated pair consisting of `'Method'` and one of the options in this table.

Option	Description
`'auto'` (default)	The `'auto'` option automatically selects the algorithm: • `'unweighted'` is used for `graph` and `digraph` inputs with no edge weights. • `'positive'` is used for all `graph` inputs that have edge weights, and requires the weights to be nonnegative.

Option	Description
	This option is also used for `digraph` inputs with nonnegative edge weights. • `'mixed'` is used for `digraph` inputs whose edge weights contain some negative values. The graph cannot have negative cycles.
`'unweighted'`	Breadth-first computation that treats all edge weights as `1`.
`'positive'`	Dijkstra algorithm that requires all edge weights to be nonnegative.
`'mixed'` (only for `digraph`)	Bellman-Ford algorithm for directed graphs that requires the graph to have no negative cycles. While `'mixed'` is slower than `'positive'` for the same problem, `'mixed'` is more versatile as it allows some edge weights to be negative.

Note: For most graphs, `'unweighted'` is the fastest algorithm, followed by `'positive'` and `'mixed'`.

Example: `nearest(G,s,d,'Method','positive')`

Output Arguments

`nodeIDs` — Nearest neighbor node IDs

vector of node indices | cell array of node names

Nearest neighbor node IDs, returned as a vector of node indices if `s` is numeric, or as a cell array of node names if `s` is a node name. The nodes are sorted from nearest to furthest. `nodeIDs` is an empty matrix or empty cell array if no nodes are within the specified distance. `nodeIDs` never contains the source node `s` even if the graph has self-loops.

Use `H = subgraph(G,[s; nodeIDs])` to extract a subgraph of the nearest neighbors from the original graph `G`.

`dist` — Neighbor distances
vector

Neighbor distances, returned as a vector. `dist(j)` is the distance from source node `s` to neighboring node `nodeIDs(j)`.

See Also

See Also
`distances` | `neighbors` | `predecessors` | `shortestpath` | `shortestpathtree` | `successors`

Topics
graph
digraph

Introduced in R2016a

neighbors

Neighbors of graph node

Syntax

```
N = neighbors(G,nodeID)
```

Description

`N = neighbors(G,nodeID)` returns the node IDs of all nodes connected by an edge to the node specified by `nodeID`.

Examples

Neighboring Graph Nodes

Create and plot a graph, and then determine the neighbors of node `10`.

```
G = graph(bucky);
plot(G)
```

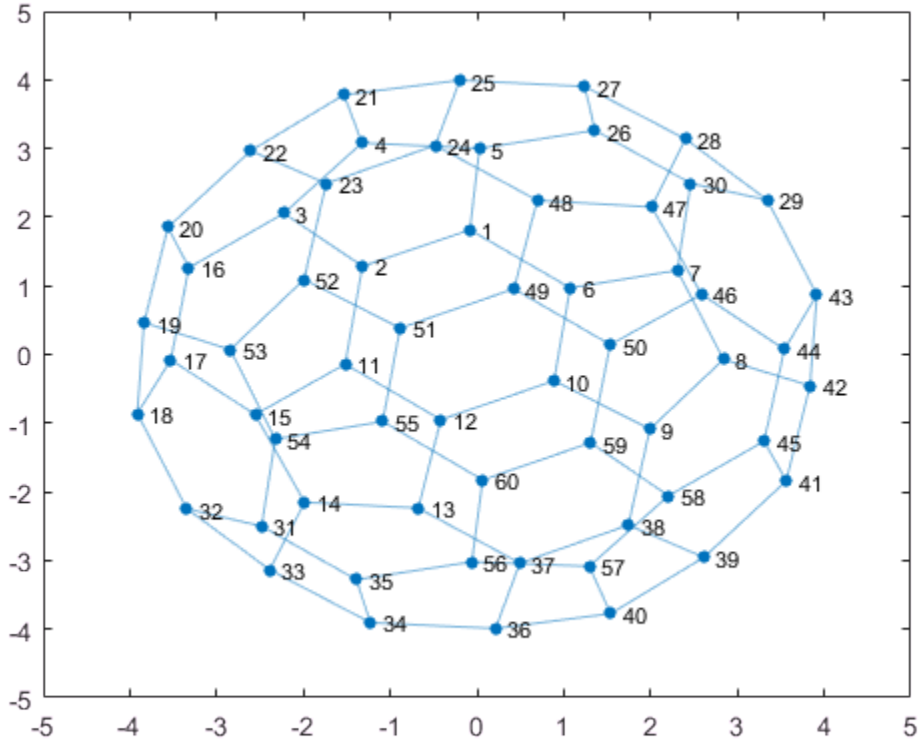


```
N = neighbors(G,10)
```

```
N =

     6
     9
    12
```

Input Arguments

`G` — Input graph
`graph` object

Input graph, specified as a `graph` object. Use the `graph` function to create an undirected graph object. For more information, see graph.

Example: `G = graph(1,2)`

`nodeID` — Node identifier
scalar | character vector

Node identifier, specified as a scalar node index or character vector node name.

Example: `N = neighbors(G,3)`

Example: `N = neighbors(G,'A')`

Output Arguments

`N` — Neighboring nodes
column vector

Neighboring nodes, returned as a column vector of node indices. A node that is connected to itself by an edge (a self-loop) is listed as its own neighbor twice, and the self-loop adds 2 to the total degree of the node.

See Also

See Also
`degree` | `graph` | `nearest`

Topics
graph

Introduced in R2015b

numedges

Number of edges in graph

Syntax

```
N = numedges(G)
```

Description

`N = numedges(G)` returns the number of edges in graph `G`.

Examples

Number of Graph Edges

Use the `bucky` adjacency matrix to create a directed graph, and then determine how many edges the graph contains.

```
G = digraph(bucky)
```

```
G = 
  digraph with properties:

    Edges: [180×2 table]
    Nodes: [60×0 table]
```

```
N = numedges(G)
```

```
N = 180
```

Input Arguments

`G` — Input graph
`graph` object | `digraph` object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

Output Arguments

`N` — Number of edges

scalar

Number of edges, returned as a scalar.

See Also

See Also

`addedge` | `graph` | `numnodes` | `rmedge`

Introduced in R2015b

numnodes

Number of nodes in graph

Syntax

```
N = numnodes(G)
```

Description

`N = numnodes(G)` returns the number of nodes in graph `G`.

Examples

Number of Graph Nodes

Use the `bucky` adjacency matrix to create a directed graph, and then determine how many nodes the graph contains.

```
G = digraph(bucky)
```

```
G = 
  digraph with properties:

    Edges: [180×2 table]
    Nodes: [60×0 table]
```

```
N = numnodes(G)
```

```
N = 60
```

Input Arguments

`G` — Input graph
`graph` object | `digraph` object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

Output Arguments

`N` — Number of nodes

scalar

Number of nodes, returned as a scalar.

See Also

See Also

`addnode` | `graph` | `numedges` | `rmnode`

Introduced in R2015b

highlight

Highlight nodes and edges in plotted graph

Syntax

```
highlight(H,nodeIDs)
highlight(H,G)
highlight(H,s,t)
highlight( ___ ,Name,Value)
```

Description

`highlight(H,nodeIDs)` highlights the nodes specified by `nodeIDs` by increasing the sizes of their markers.

`highlight(H,G)` highlights the nodes and edges of graph `G` by increasing their node marker size and edge line width, respectively. `G` must have the same nodes and a subset of the edges of the underlying graph of `H`. Isolated nodes with degree 0 are not highlighted.

`highlight(H,s,t)` highlights the edges specified by the source and target node pairs in `s` and `t` by increasing their edge line widths.

`highlight( ___ ,Name,Value)` uses additional options specified by one or more Name-Value pair arguments using any of the input argument combinations in previous syntaxes. For example, `highlight(H,nodes,'NodeColor','g')` highlights a subset of nodes by changing their color to green, instead of increasing their marker size.

Examples

Highlight Graph Nodes

Create and plot a graph. Return a handle to the `GraphPlot` object, h.

```
s = 1;
```

```
t = 2:6;
G = graph(s,t);
h = plot(G,'Layout','force')
```

```
h = 
  GraphPlot with properties:

     NodeColor: [0 0.4470 0.7410]
    MarkerSize: 4
        Marker: 'o'
     EdgeColor: [0 0.4470 0.7410]
     LineWidth: 0.5000
     LineStyle: '-'
     NodeLabel: {'1'  '2'  '3'  '4'  '5'  '6'}
     EdgeLabel: {}
         XData: [0.0011 0.9651 -1.6679 1.7341 -1.1381 0.1057]
         YData: [-1.0889e-04 -1.5082 0.6536 0.4501 -1.3839 1.7885]
         ZData: [0 0 0 0 0 0]

  Show all properties
```

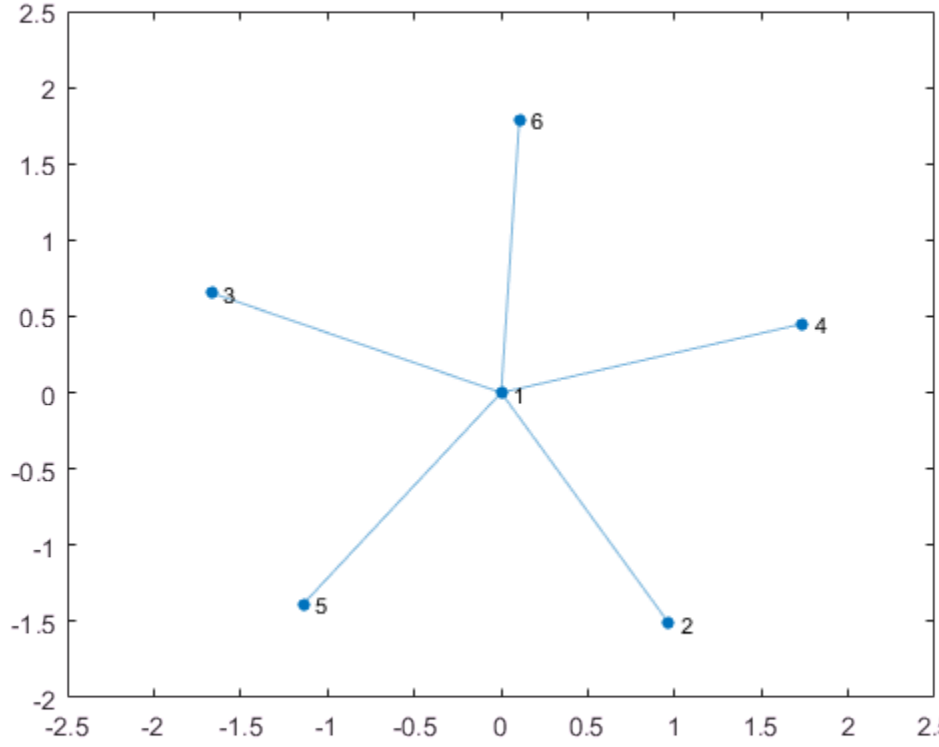

Highlight nodes 1 and 3 by increasing their marker size.

```
highlight(h,[1 3])
```

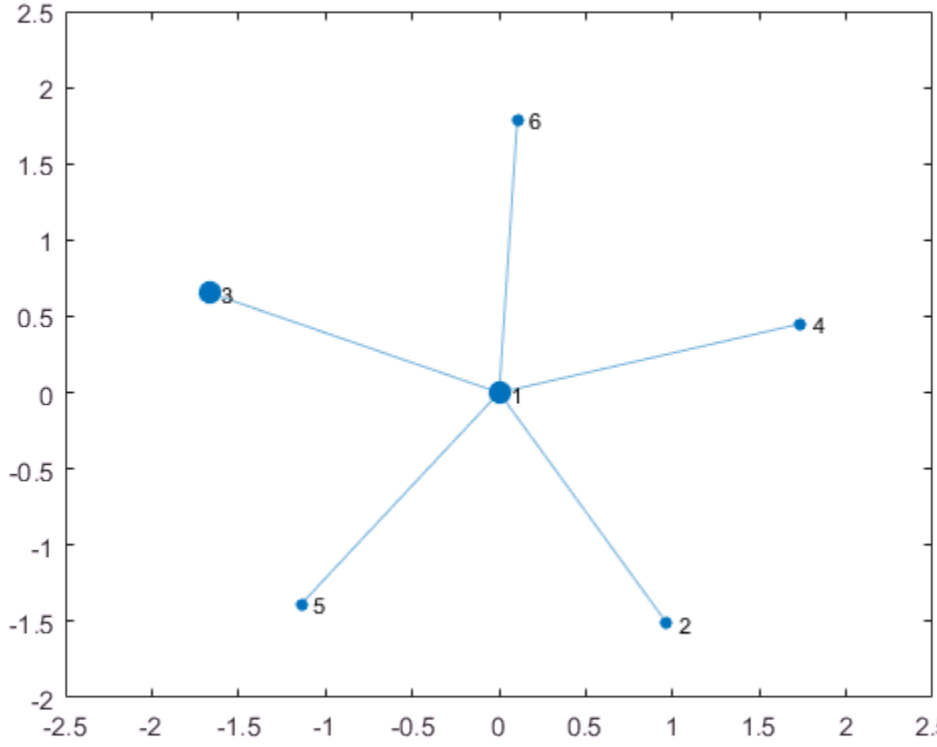

Highlight nodes 1 and 3 by changing their color.

```
highlight(h,[1 3],'NodeColor','g')
```

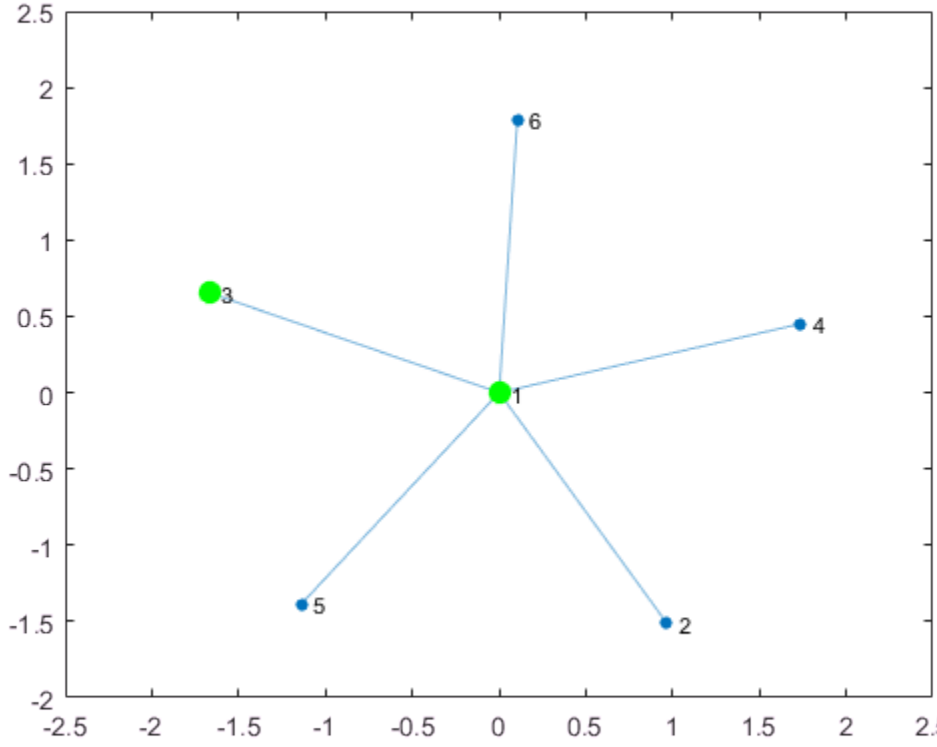

Highlight Minimum Spanning Tree of Graph

Create and plot a graph. Return a handle to the `GraphPlot` object, `h`.

```
s = [1 1 1 1 1 1 2 3 4 5 6 7 7 7 7 8 9 10 11 8 6];
t = [2 3 4 5 6 7 3 4 5 6 2 8 9 10 11 10 10 11 8 1 11];
G = graph(s,t);
h = plot(G)
```

```
h =
  GraphPlot with properties:
```

```
   NodeColor: [0 0.4470 0.7410]
  MarkerSize: 4
      Marker: 'o'
   EdgeColor: [0 0.4470 0.7410]
   LineWidth: 0.5000
   LineStyle: '-'
   NodeLabel: {'1'  '2'  '3'  '4'  '5'  '6'  '7'  '8'  '9'  '10'  '11'}
   EdgeLabel: {}
       XData: [0.2083 1.4004 1.1237 0.3276 0.4837 0.7789 -0.9535 -0.4155 -1.8983 -1.0
       YData: [0.4863 0.6171 1.4749 1.7657 1.0460 -0.0849 -0.6758 -0.5650 -1.4650 -1.
       ZData: [0 0 0 0 0 0 0 0 0 0 0]

Show all properties
```

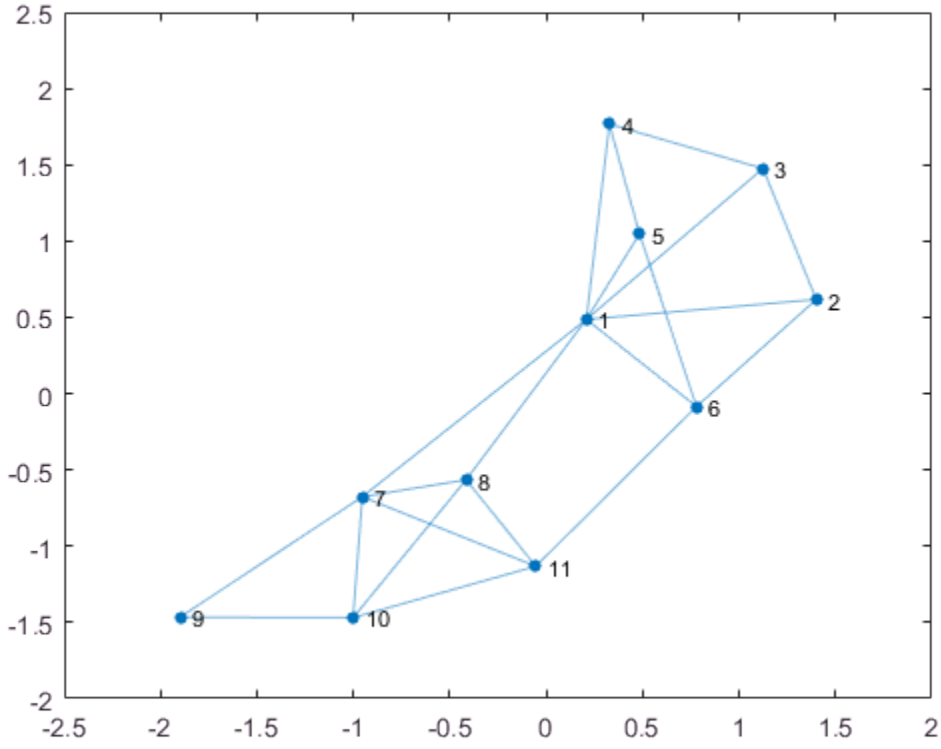

Calculate the minimum spanning tree of the graph. Highlight the minimum spanning tree subgraph in the plot by increasing the line width and changing the color of the edges in the tree.

```
[T,p] = minspantree(G);
highlight(h,T,'EdgeColor','r','LineWidth',1.5)
```

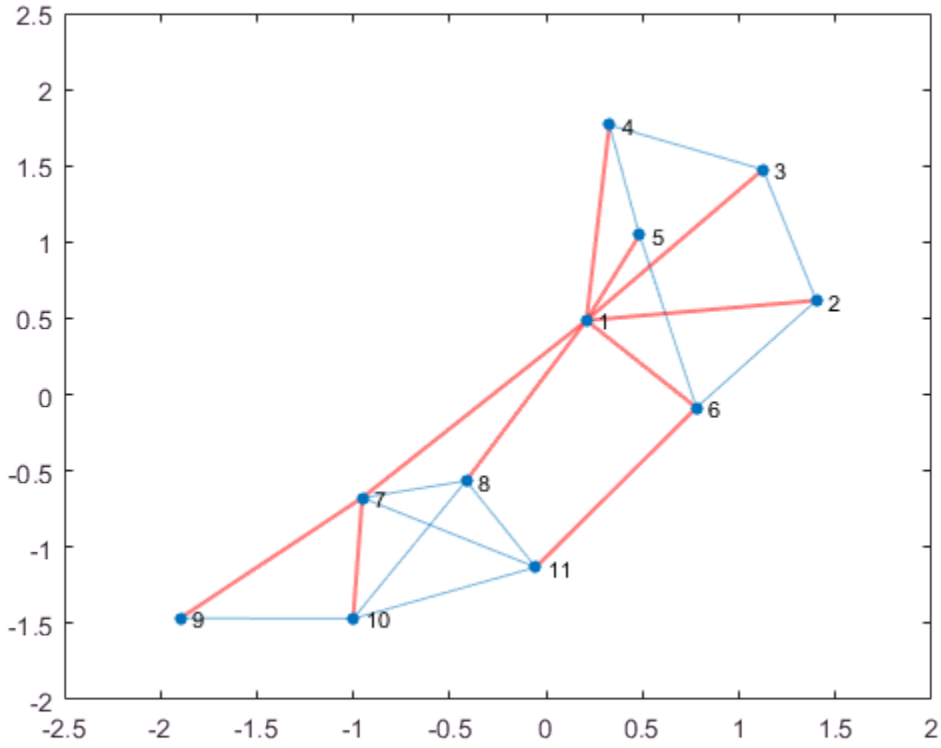

Highlight Shortest Path

Create and plot a graph. Return a handle to the `GraphPlot` object, `h`.

```
n = 10;
```

```
A = delsq(numgrid('L',n+2));
G = graph(A,'OmitSelfLoops');
G.Edges.Weight = ones(numedges(G),1);
h = plot(G);
```

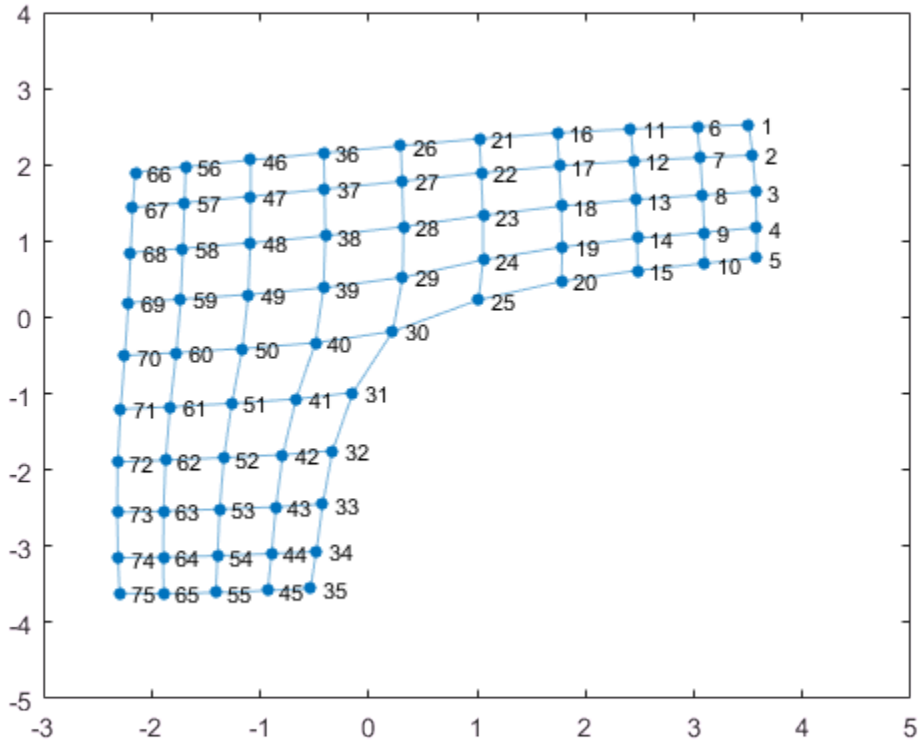

Highlight the shortest path between nodes 74 and 21 by changing the color of the nodes and edges along the path to green.

```
path = shortestpath(G,74,21);
highlight(h,path,'NodeColor','g','EdgeColor','g')
```

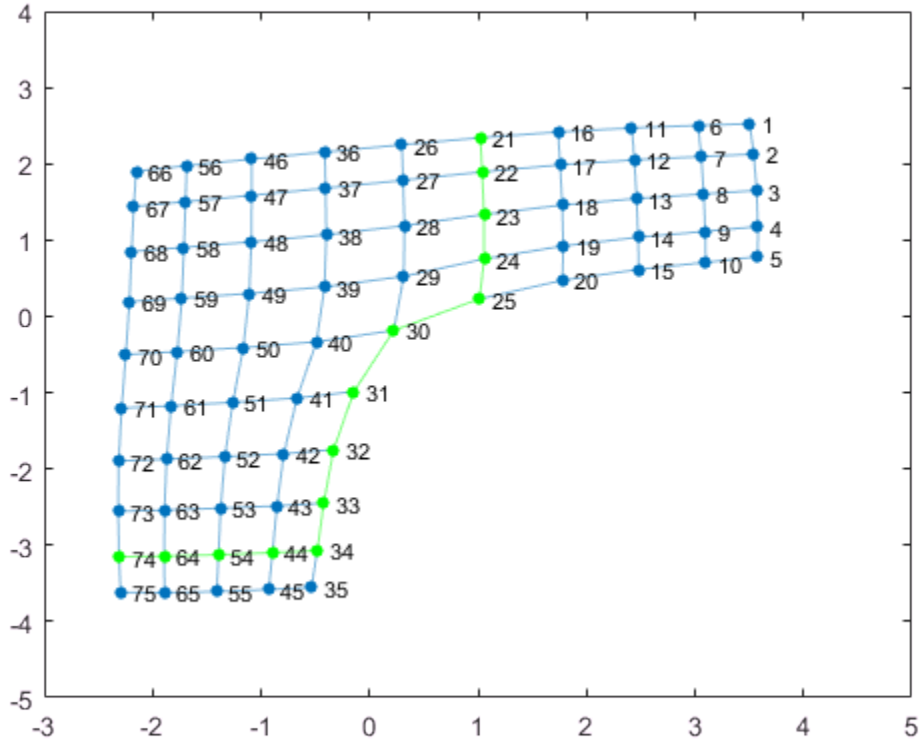

Highlight Node Neighbors

Create a graph representing a square grid with a side of 8 nodes. Plot the graph and return a handle to the `GraphPlot` object, `p`.

```
n = 8;
A = delsq(numgrid('S',n+2));
G = graph(A,'OmitSelfLoops');
p = plot(G);
```

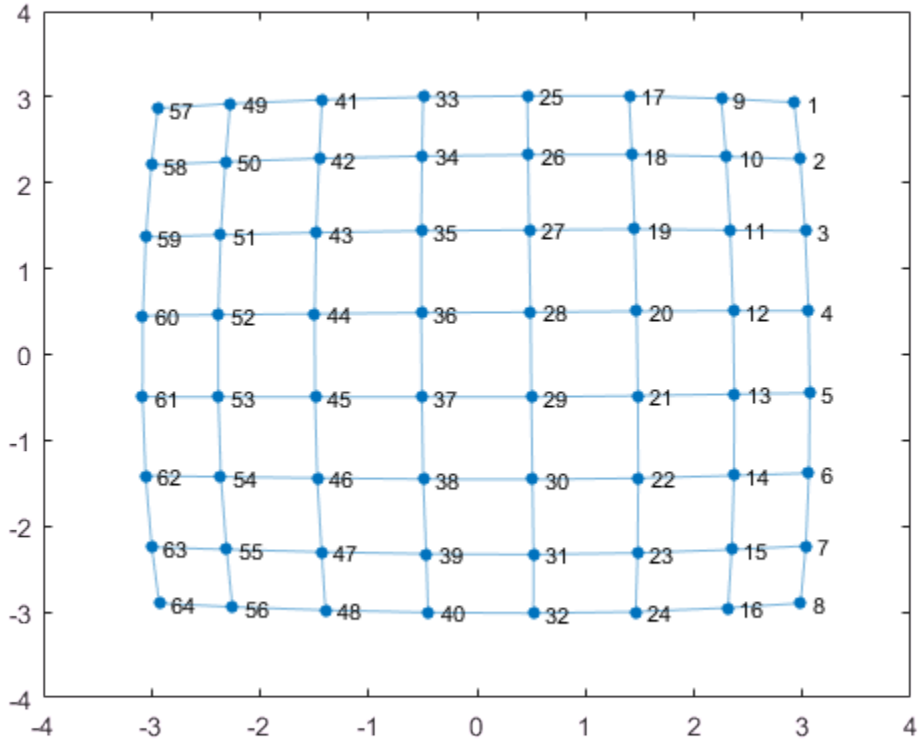

Find the neighbors of node 36.

```
n36 = neighbors(G,36)
```

```
n36 =

    28
    35
    37
    44
```

Use `highlight` to change the color of node 36 to green, and the color of its neighbors and their connecting edges to red.

```
highlight(p,36,'NodeColor',[0 0.75 0])
highlight(p,n36,'NodeColor','red')
highlight(p,36,n36,'EdgeColor','red')
```

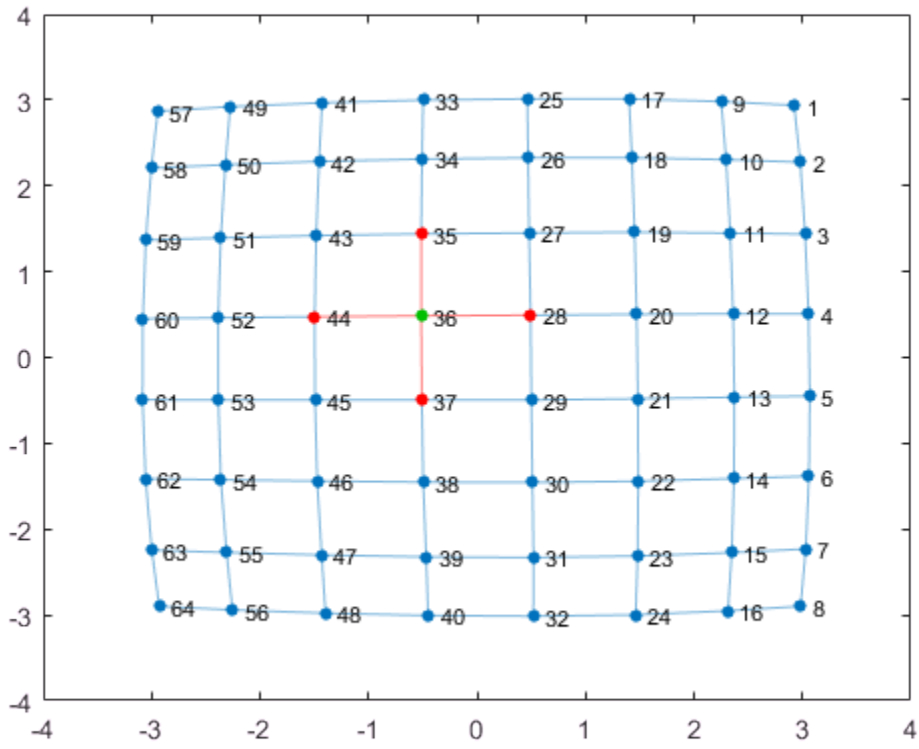

Highlight Path of Maximum Flow

Create and plot a directed graph. Return a handle to the `GraphPlot` object, `h`.

```
G = digraph(bucky);
h = plot(G);
```

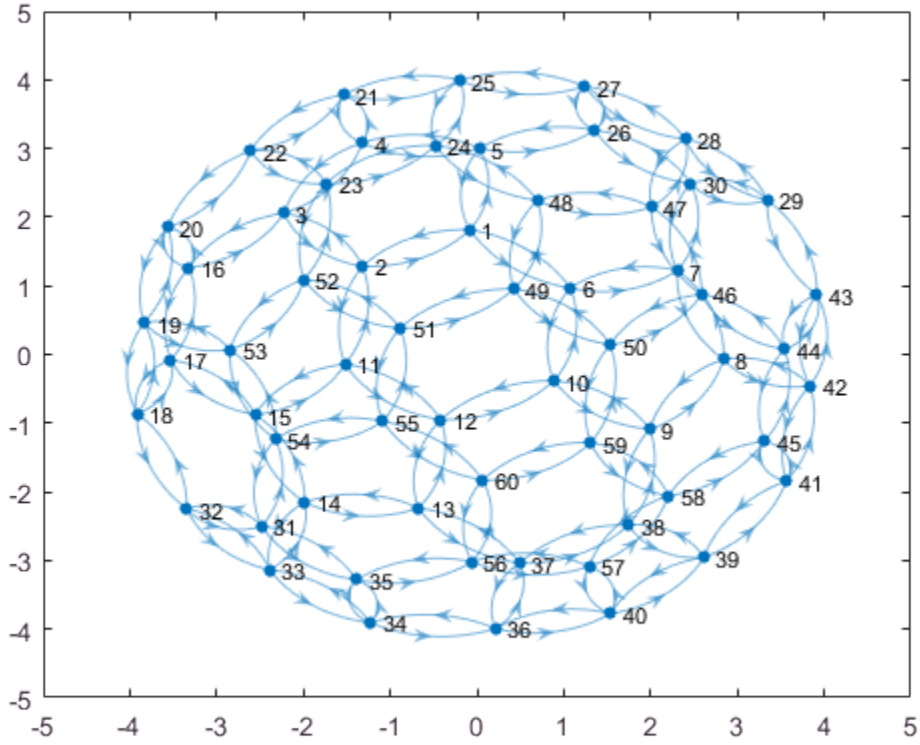

Compute the maximum flow between nodes 1 and 56. Specify two outputs to `maxflow` to return a directed graph of the nonzero flows, `GF`.

```
[mf,GF] = maxflow(G,1,56)
```

```
mf = 3

GF =
  digraph with properties:

    Edges: [28×2 table]
    Nodes: [60×0 table]
```

Use `highlight` to change the color of the edges that contain nonzero flow values. Also change the color of source node 1 and target node 56 to green.

```
highlight(h,GF,'EdgeColor',[0.9 0.3 0.1],'NodeColor',[0.9 0.3 0.1])
highlight(h,[1 56],'NodeColor','g')
```

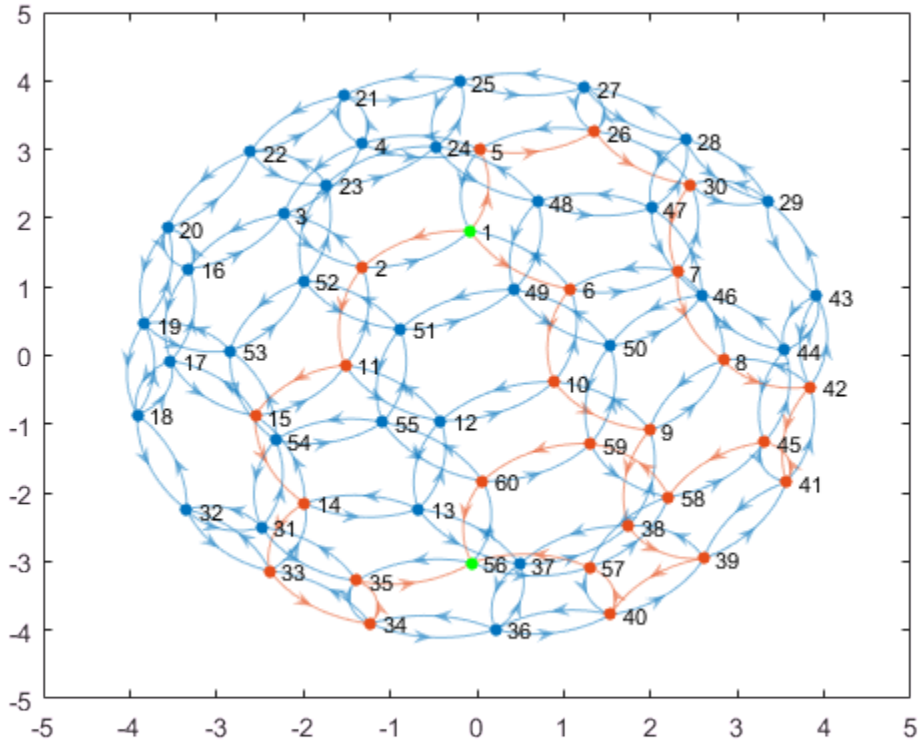

Input Arguments

H — Input graph plot
`GraphPlot` object

Input graph plot, specified as a `GraphPlot` object. Use the `graph` or `digraph` functions to create a graph, and then use `plot` with an output argument to return a `GraphPlot` object.

For more information, see GraphPlot.

Example: `H = plot(G)`

`nodeIDs` — Nodes to highlight

vector | node name | cell array of character vectors

Nodes to highlight, specified as a vector of node indices, a node name, or a cell array of character vectors containing node names.

`G` — Graph to highlight

`graph` object | `digraph` object

Graph to highlight, specified as a `graph` or `digraph` object. `G` must have the same nodes and a subset of the edges of the underlying graph of `H`. Isolated nodes with degree `0` are not highlighted.

`s,t` — Edges to highlight (as separate arguments)

scalars | vectors | character vectors | cell arrays of character vectors

Edges to highlight, specified as separate arguments that indicate the end nodes of the edges as scalar node indices, vectors of node indices, character vector node names, or cell arrays of character vectors containing node names.

Example: `highlight(H,[1 2],[3 3])` highlights the graph edges `(1,3)` and `(2,3)`.

Example: `highlight(H,'a','b')` highlights the edge `('a','b')`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `highlight(H,nodes,'NodeColor','y')`

`'EdgeColor'` — Edge color

`[0 0.4470 0.7410]` (default) | RGB triplet or color name

Edge color, specified as the comma-separated pair consisting of `'EdgeColor'` and an RGB triplet or color name.

- An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `plot(G,'EdgeColor','r')` creates a graph plot with red edges.

`'LineStyle'` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as the comma-separated pair consisting of `'LineStyle'` and one of the line styles listed in this table.

Character(s)	Line Style	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Edge line width

`0.5` (default) | positive value

Edge line width, specified as the comma-separated pair consisting of `'LineWidth'` and a positive value in point units.

Example: `0.75`

`'Marker'` — Node marker symbol

`'o'` (default) | character vector

Node marker symbol, specified as the comma-separated pair consisting of `'Marker'` and one of the character vectors listed in this table. The default is to use circular markers for the graph nodes.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'+'`

Example: `'diamond'`

`'MarkerSize'` — Node marker size

positive value

Node marker size, specified as the comma-separated pair consisting of `'MarkerSize'` and a positive value in point units. The default marker size is `4` for graphs with 100 or fewer nodes, and `2` for graphs with more than 100 nodes.

Example: `10`

`'NodeColor'` — Node color

`[0 0.4470 0.7410]` (default) | RGB triplet or color name

Node color, specified as the comma-separated pair consisting of `'NodeColor'` and an RGB triplet or color name.

- An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `plot(G,'NodeColor','k')` creates a graph plot with black nodes.

See Also

See Also

`labeledge` | `labelnode` | `layout` | `plot`

Topics

GraphPlot

"Graph Plotting and Customization"

Introduced in R2015b

labeledge

Label graph edges

Syntax

```
labeledge(H,s,t,Labels)
labeledge(H,idx,Labels)
```

Description

`labeledge(H,s,t,Labels)` labels the edges specified by `(s,t)` pairs with the character vectors contained in `Labels`. The lengths of `s`, `t`, and `Labels` must be equal, or `Labels` can be scalar.

`labeledge(H,idx,Labels)` specifies the edges to label using their edge indices. The edge indices are positive integers corresponding to the row number of the edge in the edge list of the graph, `G.Edges`.

Examples

Label Graph Edge Weight

Create and plot a graph.

```
s = [1 1 1 2 2];
t = [2 3 4 2 5];
G = graph(s,t);
h = plot(G);
```

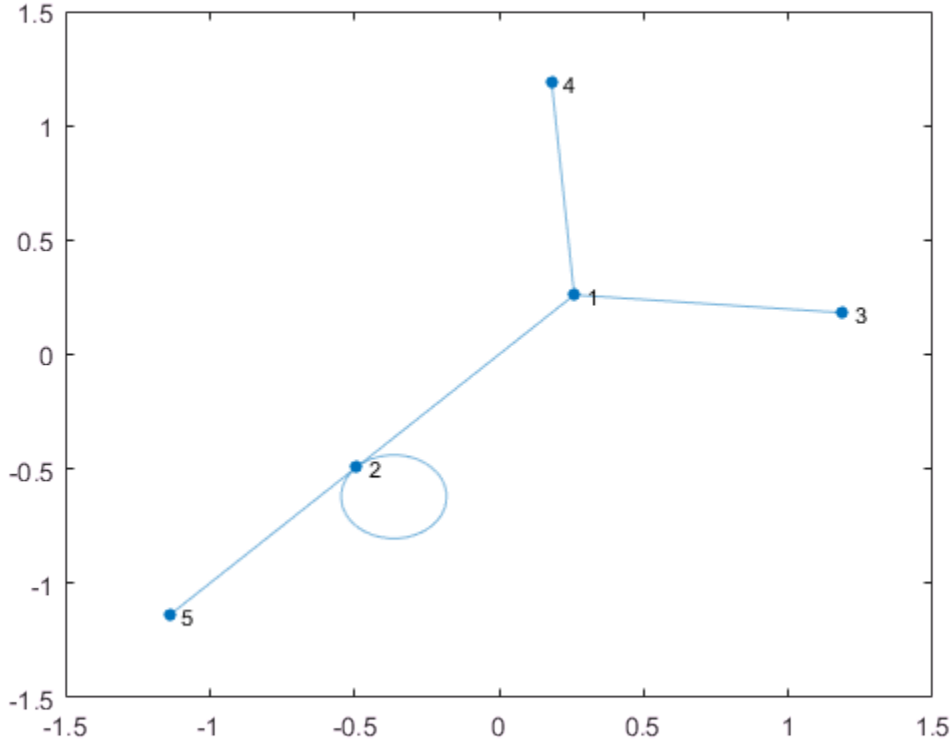

Label the edge weights using `labeledge`.

```
weights = [5 10 15 10 10];
labeledge(h,1:numedges(G),weights)
```

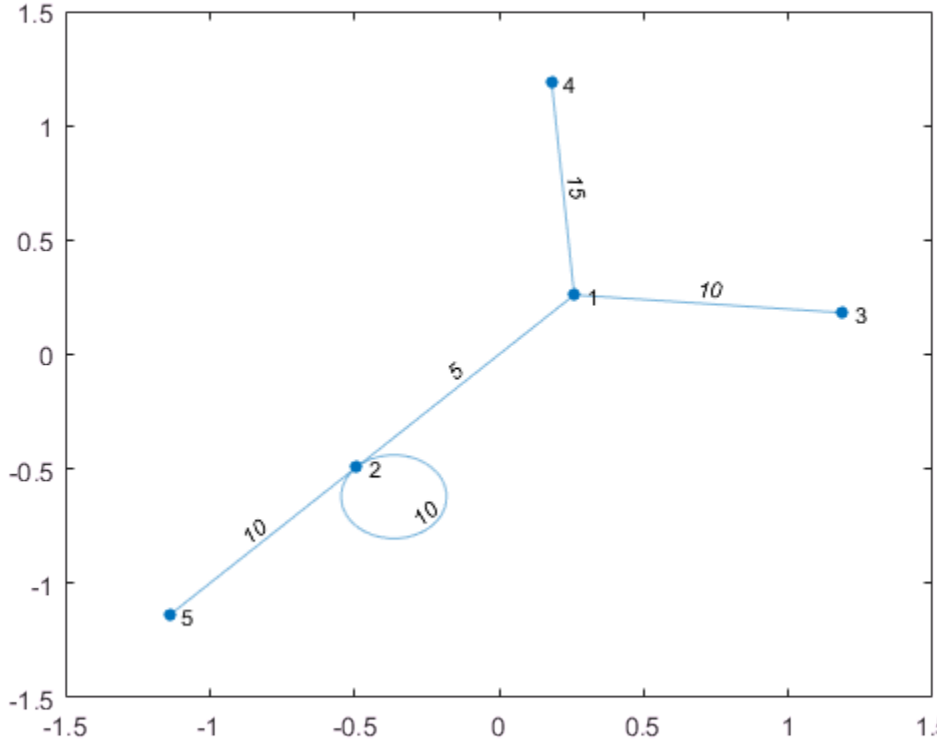

Add Text Labels to Graph Edges

Create and plot a graph.

```
s = [1 1 2 2 3];
t = [2 3 3 4 4];
G = graph(s,t);
h = plot(G);
```

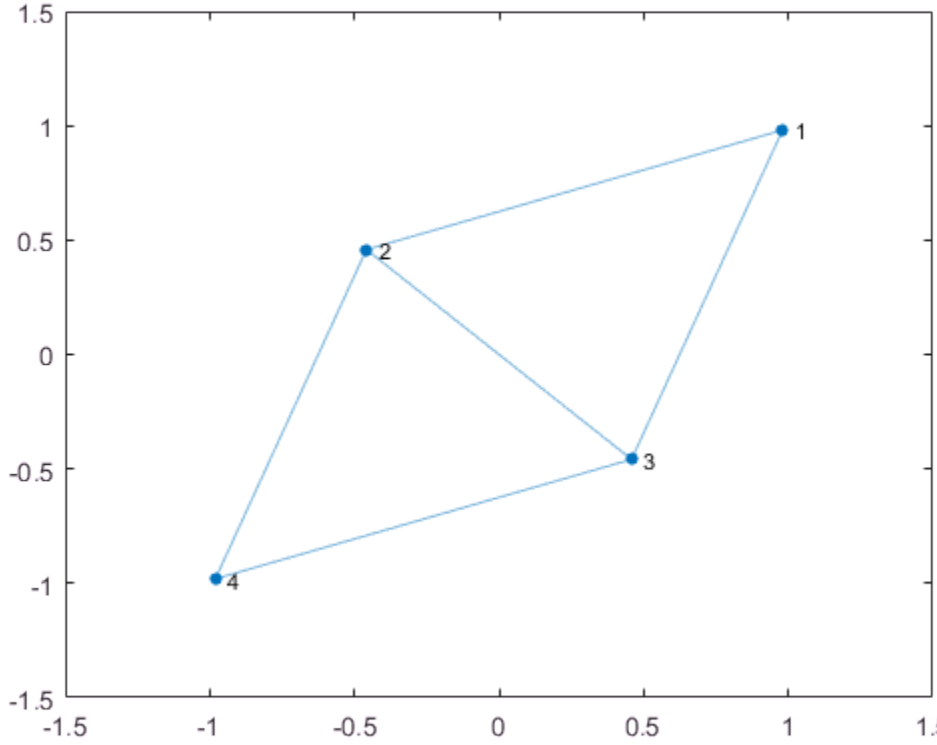

Add text labels to three of the five graph edges.

```
labelText = {'ABC' 'DEF' 'GHI'};
labeledge(h,[1 1 2],[2 3 3],labelText)
```

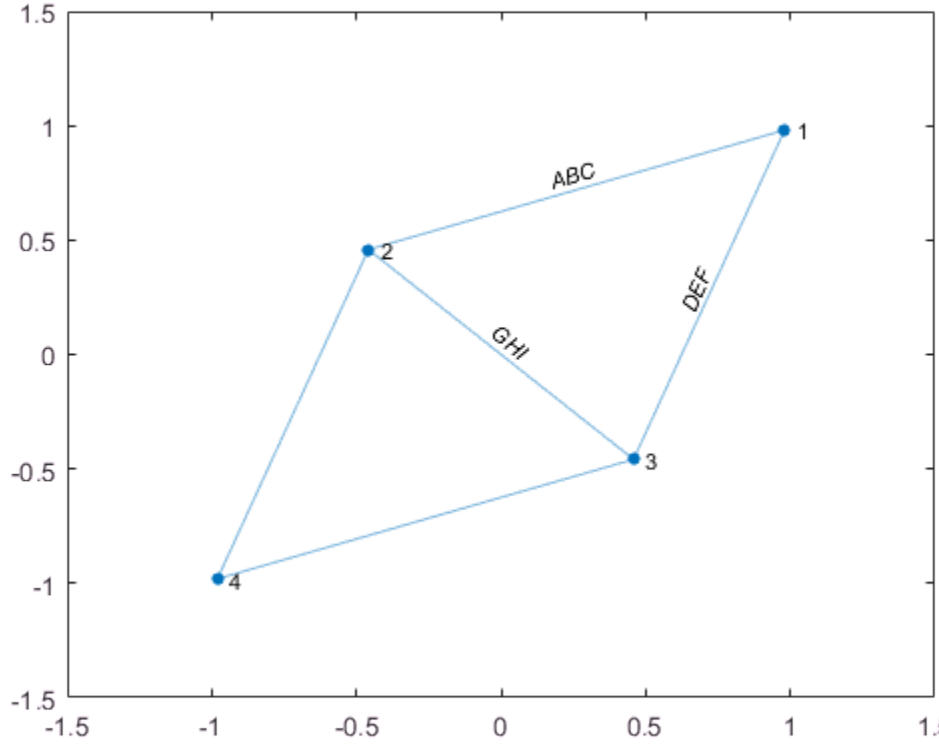

Input Arguments

H — Input graph plot

`GraphPlot` object

Input graph plot, specified as a `GraphPlot` object. Use the `graph` or `digraph` functions to create a graph, and then use `plot` with an output argument to return a `GraphPlot` object.

For more information, see GraphPlot.

Example: `H = plot(G)`

`s,t` — Edges to label (as separate arguments)

scalars | vectors | character vectors | cell arrays of character vectors

Edges to label, specified as separate arguments that indicate the end nodes of the edges as scalar node indices, vectors of node indices, character vector node names, or cell arrays of character vectors containing node names.

Example: `labeledge(H,[1 2 2],[2 3 4],{'label1' 'label2' 'label3'})`

Example: `labeledge(H,{'a' 'b' 'b'},{'b' 'c' 'd'},{'label1' 'label2' 'label3'})`

`idx` — Edge indices

scalar | vector

Edge indices, specified as scalar or vector of positive integers. The edge indices correspond to rows in the table `H.Edges`, such that `H.Edges(idx,:)` returns the end nodes of the edge. The maximum value for `idx` is `numedges(H)`. The number of indices in `idx` must be the same as the number of values in `Labels`.

Example: `labeledge(H,[1 3 5 7],{'label1' 'label2' 'label3' 'label4'})`

`Labels` — Edge labels

character vector | cell array of character vectors

Edge labels, specified as a character vector or a cell array of character vectors.

- If `Labels` is a character vector, then `labeledge` uses that label for each specified edge.
- If `Labels` is a cell array, then it must contain a label for each specified edge.

Data Types: `char` | `cell`

See Also

See Also

`highlight` | `labelnode` | `layout` | `plot`

Topics

GraphPlot

"Graph Plotting and Customization"

Introduced in R2015b

labelnode

Label graph nodes

Syntax

```
labelnode(H,nodeIDs,Labels)
```

Description

`labelnode(H,nodeIDs,Labels)` labels the nodes specified by `nodeIDs` with the character vectors contained in `Labels`. The lengths of `nodeIDs` and `Labels` must be equal, or `Labels` can be scalar.

Examples

Label Graph Nodes

Create and plot a graph.

```
s = [1 1 2 2 3 4 5 5];
t = [2 3 3 4 4 5 1 2];
G = digraph(s,t);
h = plot(G);
```

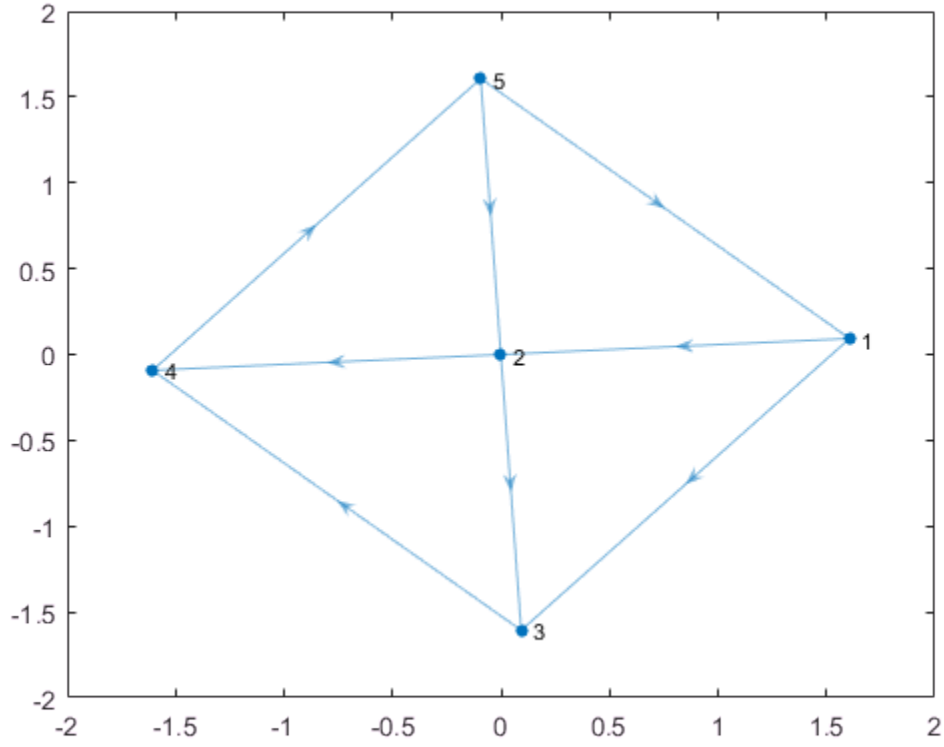

The `plot` function automatically labels the graph nodes with their node indices (or with their node names, if available). Use text labels for some of the graph nodes instead.

```
labelnode(h,[1 2],{'source' 'target'})
```

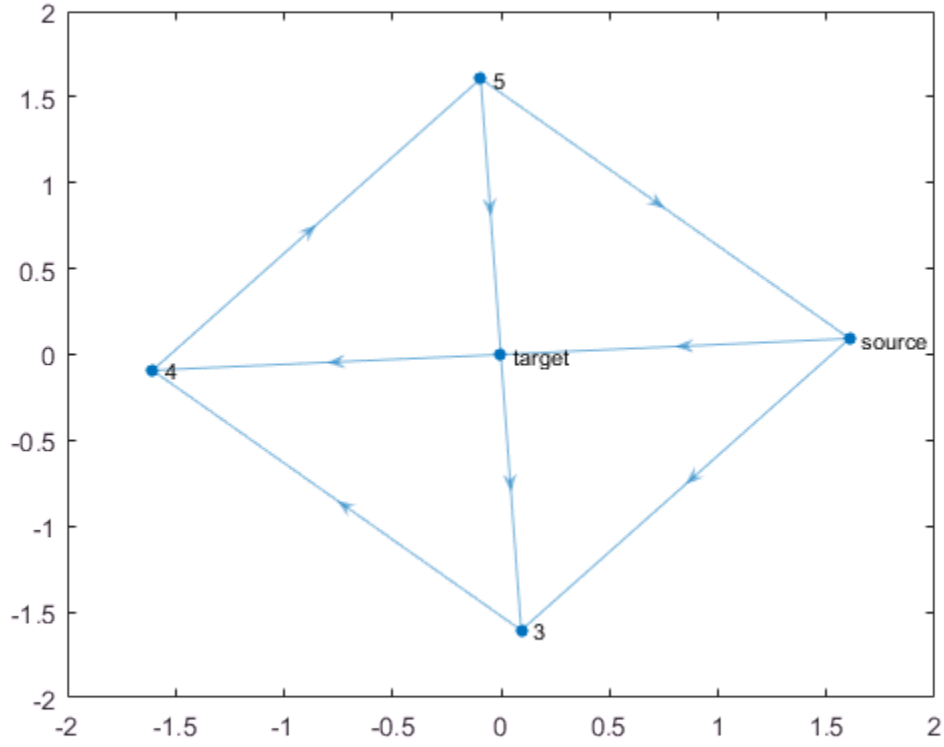

Label node 3 and node 4 as `'A'`. Since the node labels do not change the underlying graph, `G`, the labels can contain duplicate names (the official node names in `G` must always be unique).

```
labelnode(h,[3 4],'A')
```

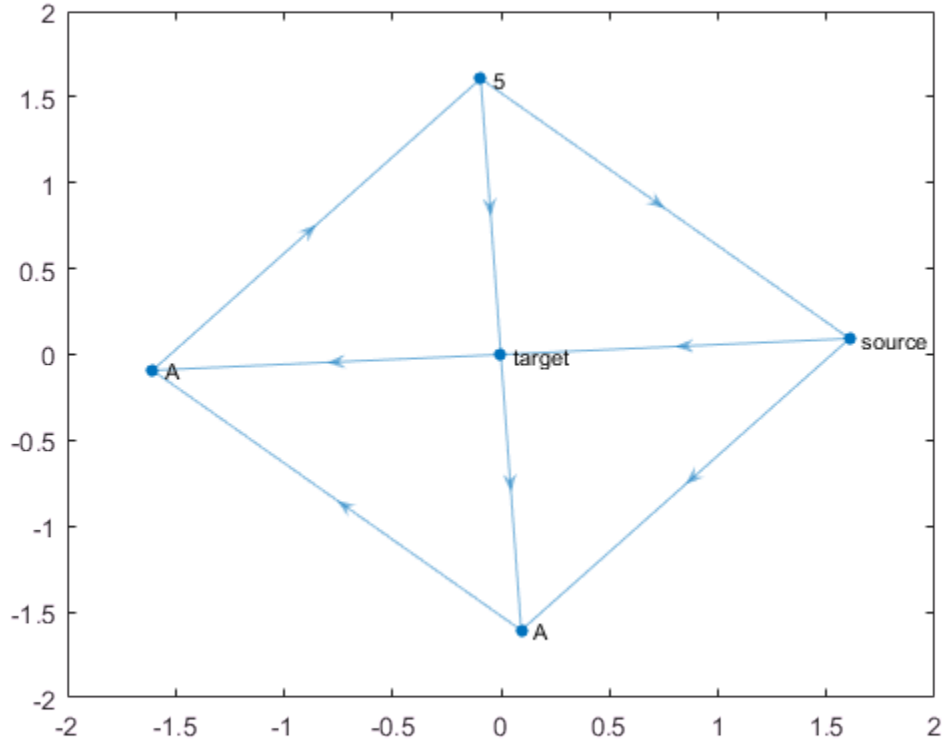

Input Arguments

H — Input graph plot
`GraphPlot` object

Input graph plot, specified as a `GraphPlot` object. Use the `graph` or `digraph` functions to create a graph, and then use `plot` with an output argument to return a `GraphPlot` object.

For more information, see GraphPlot.

Example: `H = plot(G)`

`nodeIDs` — Nodes to label

vector | node name | cell array of character vectors

Nodes to label, specified as a vector of node indices, a node name, or a cell array of character vectors containing node names.

`Labels` — Node labels

character vector | cell array of character vectors

Node labels, specified as a character vector or a cell array of character vectors.

- If `Labels` is a character vector, then `labelnode` uses that label for each node specified by `nodeIDs`.
- If `Labels` is a cell array, then it must contain a label for each node specified by `nodeIDs`.

Data Types: `char` | `cell`

See Also

See Also

`highlight` | `labeledge` | `layout` | `plot`

Topics

GraphPlot
"Graph Plotting and Customization"

Introduced in R2015b

layout

Change layout of graph plot

Syntax

```
layout(H)
layout(H,method)
layout(H,method,Name,Value)
```

Description

`layout(H)` changes the layout of graph plot `H` by using an automatic choice of layout method based on the structure of the graph. The `layout` function modifies the `XData` and `YData` properties of `H`.

`layout(H,method)` optionally specifies the layout method. `method` can be `'circle'`, `'force'`, `'layered'`, `'subspace'`, `'force3'`, or `'subspace3'`.

`layout(H,method,Name,Value)` uses additional options specified by one or more Name-Value pair arguments. For example, `layout(H,'force','Iterations',N)` specifies the number of iterations to use in computing the force layout, and `layout(H,'layered','Sources',S)` uses a layered layout with source nodes `S` included in the first layer.

Examples

Graph Layout Based on Structure

Create and plot a graph using the `'force'` layout.

```
s = [1 1 1 1 1 6 6 6 6 6];
t = [2 3 4 5 6 7 8 9 10 11];
G = graph(s,t);
h = plot(G,'Layout','force');
```

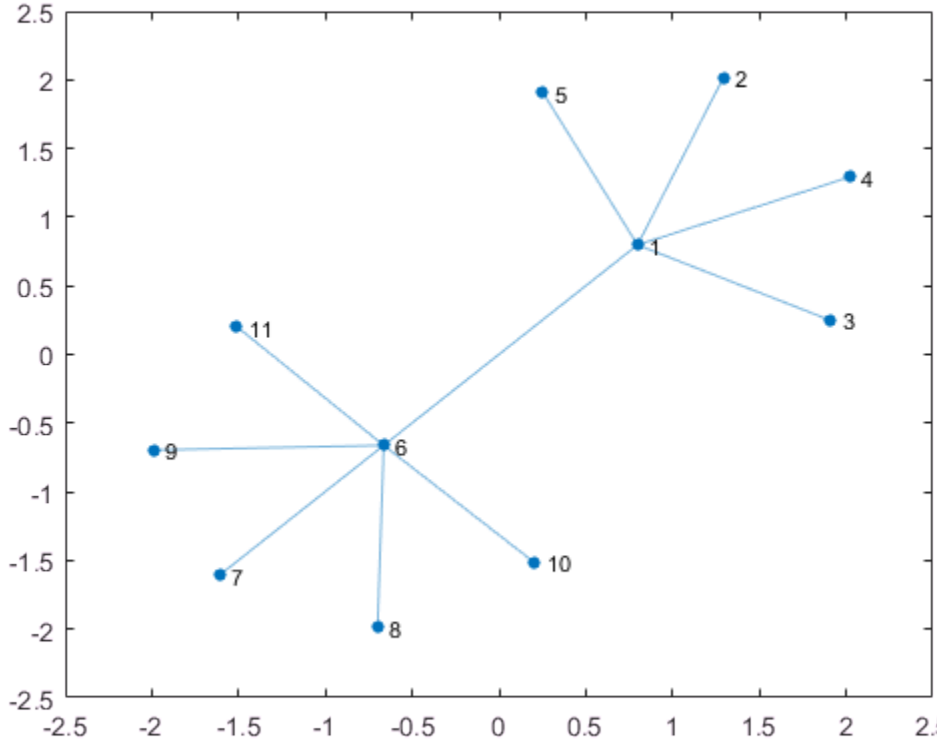

Change the layout to be the default that `plot` determines based on the structure and properties of the graph. The result is the same as using `plot(G)`.

```
layout(h)
```

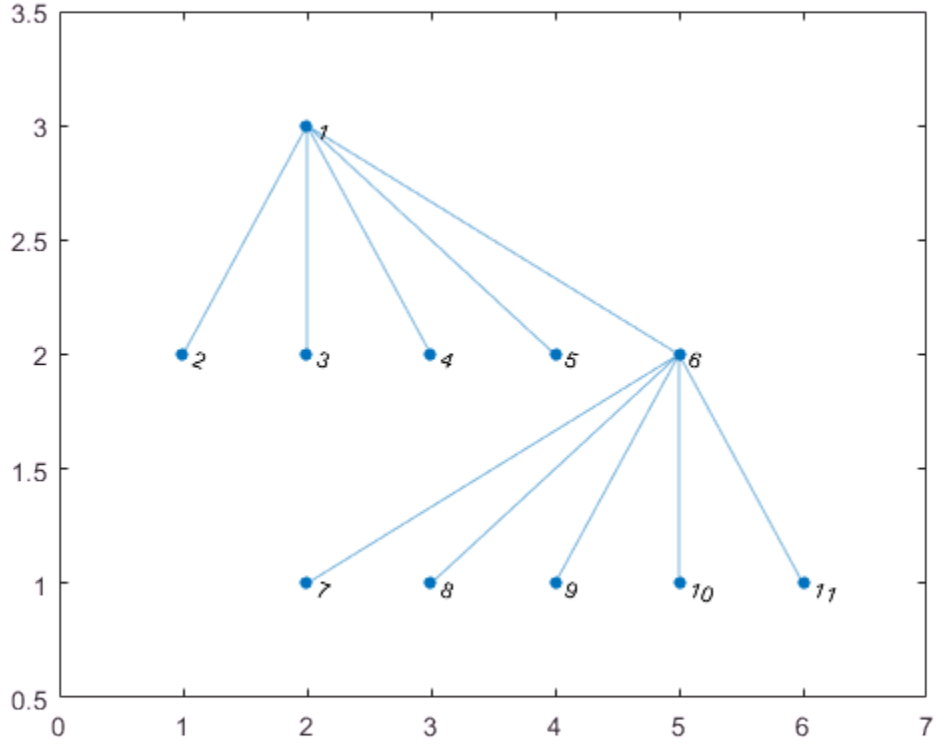

Change Layout of Graph

Create and plot a graph using the `'layered'` layout.

```
s = [1 1 1 2 2 3 3 4 5 5 6 7];
t = [2 4 5 3 6 4 7 8 6 8 7 8];
G = graph(s,t);
h = plot(G,'Layout','layered');
```

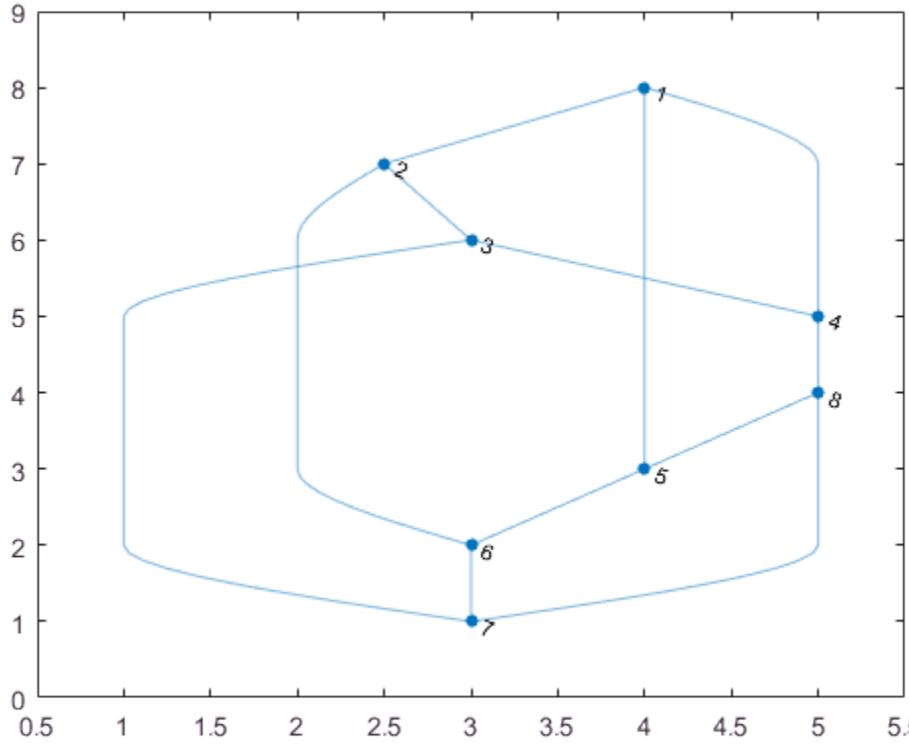

Change the layout of the graph to use the `'subspace'` method.

```
layout(h,'subspace')
```

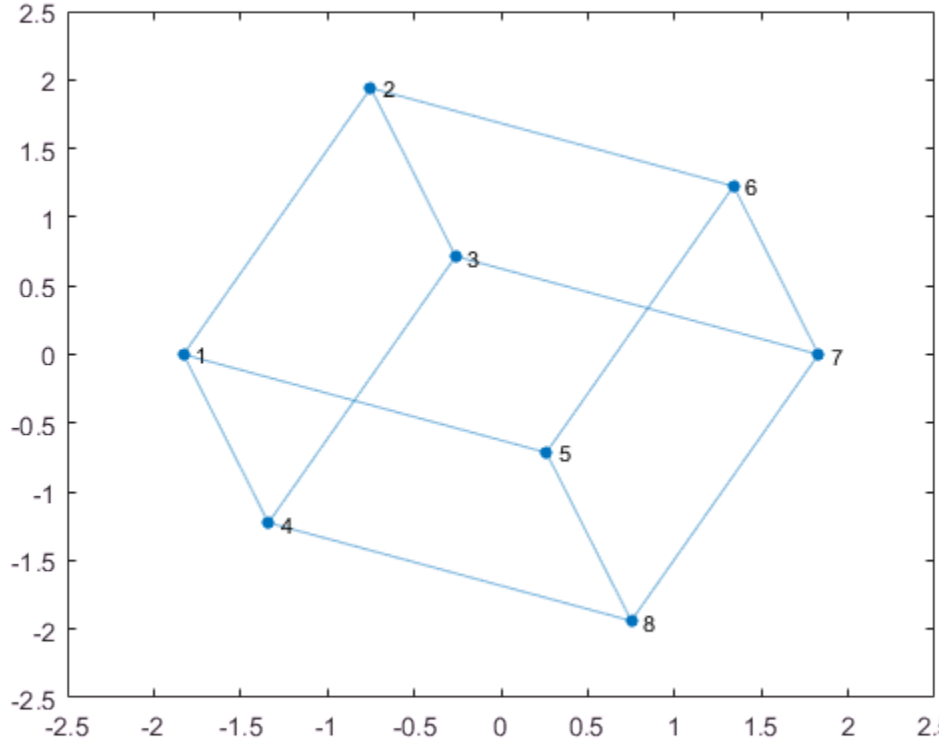

Refine Layout Method of Graph

Create and plot a graph using the `'layered'` layout method.

```
s = [1 1 1 2 3 3 3 4 4];
t = [2 4 5 6 2 4 7 8 1];
G = digraph(s,t);
h = plot(G,'Layout','layered');
```

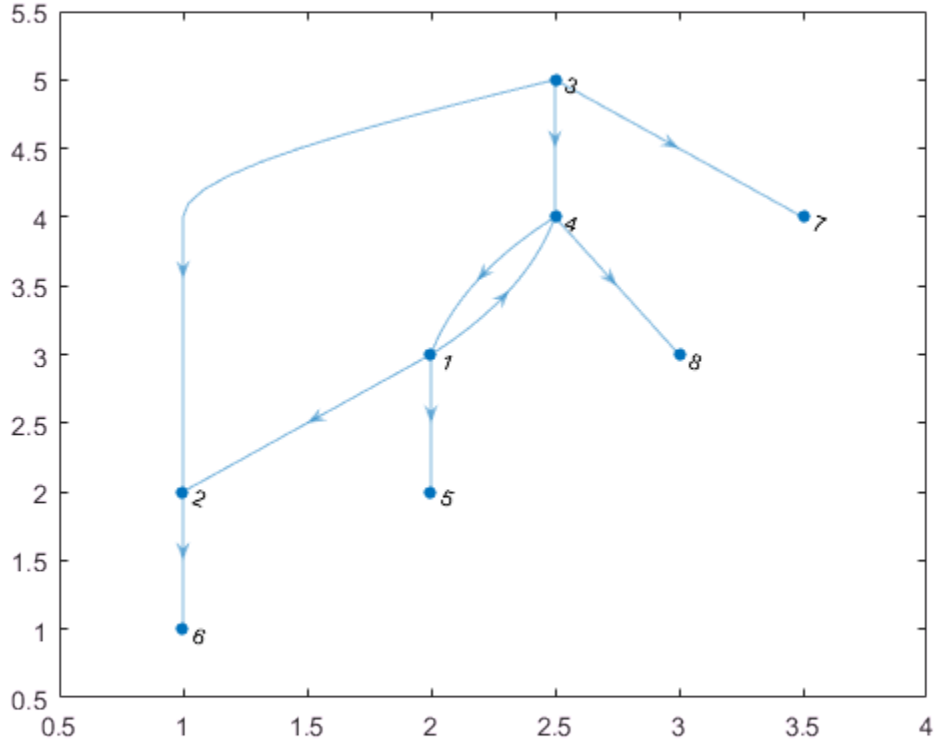

Use the `layout` function to refine the hierarchical layout by specifying source nodes and a horizontal orientation.

```
layout(h,'layered','Direction','right','Sources',[1 4])
```

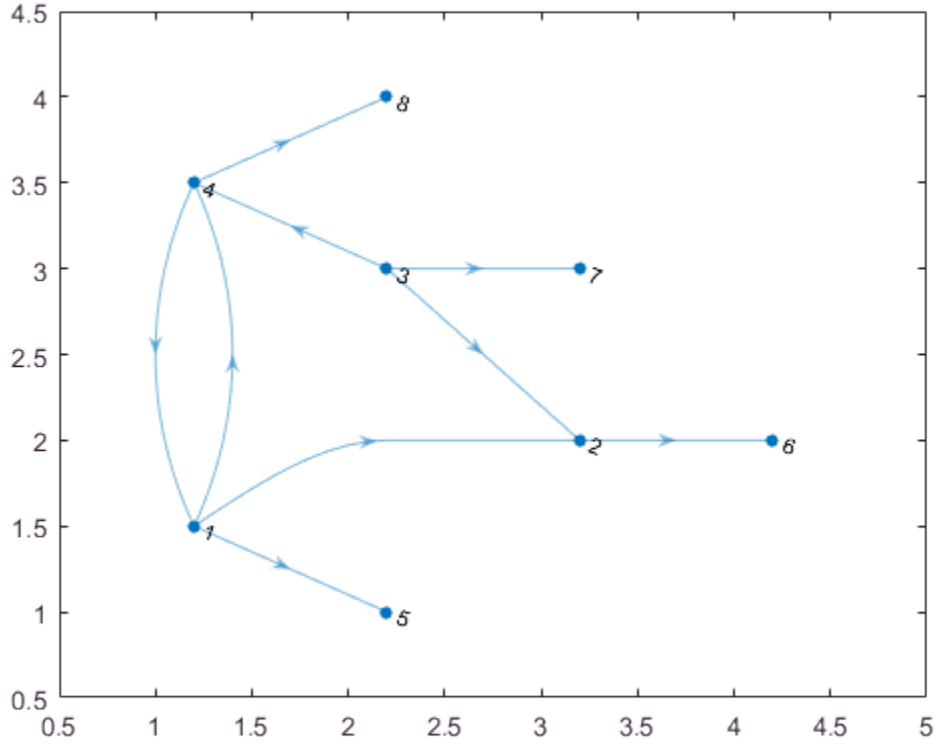

Input Arguments

H — Input graph plot

`GraphPlot` object

Input graph plot, specified as a `GraphPlot` object. Use the `graph` or `digraph` functions to create a graph, and then use `plot` with an output argument to return a `GraphPlot` object.

For more information, see GraphPlot.

Example: `H = plot(G)`

`method` — Layout method

`'auto'` (default) | `'circle'` | `'force'` | `'layered'` | `'subspace'` | `'force3'` | `'subspace3'`

Layout method, specified as one of the options in the table. The table also lists compatible Name-Value pairs to further refine each layout method.

Option	Description	Name-Value Pairs
`'auto'` (default)	Automatic choice of layout method based on the size and structure of the graph.	—
`'circle'`	Circular layout. Places the graph nodes on a circle centered at the origin with radius 1.	—

`'force'`	Force-directed layout [1]. Uses attractive forces between adjacent nodes and repulsive forces between distant nodes.	`'Iterations'`
		`'XStart'`
		`'YStart'`

`'layered'`	Layered layout [2], [3], [4]. Places the graph nodes into a set of layers, revealing hierarchical structure. By default the layers progress downwards (the arrows of a directed acyclic graph point down).	`'Direction'`
		`'Sources'`
		`'Sinks'`
		`'AssignLayers'`

`'subspace'`	Subspace embedding layout [5]. Plots the graph nodes in a high-dimensional embedded subspace, and then projects the positions back into 2-D. By default the subspace dimension is either 100 or the total number of nodes, whichever is smaller.	`'Dimension'`

Option	Description	Name-Value Pairs

`'force3'`	3-D force-directed layout.	`'Iterations'`
		`'XStart'`
		`'YStart'`
		`'ZStart'`

`'subspace3'`	3-D subspace embedding layout.	`'Dimension'`

Example: `layout(H,'layered')`

Example: `layout(H,'force3','Iterations',10)`

Example: `layout(H,'subspace','Dimension',50)`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `layout(H,'subspace','Dimension',200)`

Force

`'Iterations'` — Number of force-directed layout iterations

`100` (default) | positive scalar integer

Number of force-directed layout iterations, specified as the comma-separated pair consisting of `'Iterations'` and a positive scalar integer.

This option is available only when `method` is `'force'` or `'force3'`.

Example: `layout(H,'force','Iterations',250)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'XStart'` — Starting x-coordinates for nodes

vector

Starting x-coordinates for nodes, specified as the comma-separated pair consisting of `'XStart'` and a vector of node coordinates. Use this option together with `'YStart'` to specify 2-D starting coordinates (or with `'YStart'` and `'ZStart'` to specify 3-D starting coordinates) before iterations of the force-directed algorithm change the node positions.

This option is available only when `method` is `'force'` or `'force3'`.

Example: `layout(H,'force','XStart',x,'YStart',y)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'YStart'` — Starting y-coordinates for nodes

vector

Starting y-coordinates for nodes, specified as the comma-separated pair consisting of `'YStart'` and a vector of node coordinates. Use this option together with `'XStart'` to specify 2-D starting coordinates (or with `'XStart'` and `'ZStart'` to specify 3-D starting coordinates) before iterations of the force-directed algorithm change the node positions.

This option is available only when `method` is `'force'` or `'force3'`.

Example: `layout(H,'force','XStart',x,'YStart',y)`

Example: `layout(H,'force','XStart',x,'YStart',y,'ZStart',z)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'ZStart'` — Starting z-coordinates for nodes

vector

Starting z-coordinates for nodes, specified as the comma-separated pair consisting of `'ZStart'` and a vector of node coordinates. Use this option together with `'XStart'` and `'YStart'` to specify the starting x, y, and z node coordinates before iterations of the force-directed algorithm change the node positions.

This option is available only when `method` is `'force3'`.

Example: `layout(H,'force','XStart',x,'YStart',y,'ZStart',z)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Layered

`'Direction'` — Direction of layers

`'down'` (default) | `'up'` | `'left'` | `'right'`

Direction of layers, specified as the comma-separated pair consisting of `'Direction'` and either `'down'`, `'up'`, `'left'` or `'right'`. For directed acyclic (DAG) graphs, the arrows point in the indicated direction.

This option is available only when `method` is `'layered'`.

Example: `layout(H,'layered','Direction','up')`

`'Sources'` — Nodes to include in the first layer

vector | cell array

Nodes to include in first the layer, specified as the comma-separated pair consisting of `'Sources'` and either a vector of node indices or a cell array of character vectors containing node names.

This option is available only when `method` is `'layered'`.

Example: `layout(H,'layered','Sources',[1 3 5])`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `cell`

`'Sinks'` — Nodes to include in the last layer

vector | cell array

Nodes to include in the last layer, specified as the comma-separated pair consisting of `'Sinks'` and either a vector of node indices or a cell array of character vectors containing node names.

This option is available only when `method` is `'layered'`.

Example: `layout(H,'layered','Sinks',[2 4 6])`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `cell`

`'AssignLayers'` — Layer assignment method

`'auto'` (default) | `'asap'` | `'alap'`

Layer assignment method, specified as the comma-separated pair consisting of `'AssignLayers'` and one of the options in this table.

Option	Description
`'auto'` (default)	Node assignment uses either `'asap'` or `'alap'`, whichever is more compact.
`'asap'`	As soon as possible. Each node is assigned to the first possible layer, given the constraint that all its predecessors must be in earlier layers.
`'alap'`	As late as possible. Each node is assigned to the last possible layer, given the constraint that all its successors must be in later layers.

This option is available only when `method` is `'layered'`.

Example: `layout(H,'layered','AssignLayers','alap')`

Subspace

`'Dimension'` — Dimension of embedded subspace

positive scalar integer

Dimension of embedded subspace, specified as the comma-separated pair consisting of `'Dimension'` and a positive scalar integer.

- The default integer value is `min([100, numnodes(G)])`.
- For the `'subspace'` layout, the integer must be greater than or equal to 2.
- For the `'subspace3'` layout, the integer must be greater than or equal to 3.
- In both cases, the integer must be less than the number of nodes.

This option is available only when `method` is `'subspace'` or `'subspace3'`.

Example: `layout(H,'subspace','Dimension',d)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Tips

- Use the `Layout` name-value pair to change the layout of a graph when you plot it. For example, `plot(G,'Layout','circle')` plots the graph `G` with a circular layout.
- When using the `'force'` or `'force3'` layout methods, a best practice is to use more iterations with the algorithm instead of using `XStart`, `YStart`, and `ZStart` to restart the algorithm using previous outputs. The result of executing the algorithm with 100 iterations is different in comparison to executing 50 iterations, and then restarting the algorithm from the ending positions to execute 50 more iterations.

References

[1] Fruchterman, T., and E. Reingold,. "Graph Drawing by Force-directed Placement." *Software — Practice & Experience*. Vol. 21 (11), 1991, pp. 1129–1164.

[2] Gansner, E., E. Koutsofios, S. North, and K.-P Vo. "A Technique for Drawing Directed Graphs." *IEEE Transactions on Software Engineering*. Vol.19, 1993, pp. 214–230.

[3] Barth, W., M. Juenger, and P. Mutzel. "Simple and Efficient Bilayer Cross Counting." *Journal of Graph Algorithms and Applications*. Vol.8 (2), 2004, pp. 179–194.

[4] Brandes, U., and B. Koepf. "Fast and Simple Horizontal Coordinate Assignment." *LNCS*. Vol. 2265, 2002, pp. 31–44.

[5] Y. Koren. "Drawing Graphs by Eigenvectors: Theory and Practice." *Computers and Mathematics with Applications*. Vol. 49, 2005, pp. 1867–1888.

See Also

See Also

`digraph` | `graph` | `highlight` | `labeledge` | `labelnode` | `plot`

Topics

GraphPlot
"Graph Plotting and Customization"

Introduced in R2015b

plot (graph)

Graph plot

Syntax

```
plot(G)
plot(G,LineSpec)
plot( ___ ,Name,Value)
plot(ax, ___ )
h = plot( ___ )
```

Description

`plot(G)` plots the nodes and edges in graph `G`.

`plot(G,LineSpec)` sets the line style, marker symbol, and color. For example, `plot(G,'-or')` uses red circles for the nodes and red lines for the edges.

`plot( ___ ,Name,Value)` uses additional options specified by one or more Name-Value pair arguments using any of the input argument combinations in previous syntaxes. For example, `plot(G,'Layout','circle')` plots a circular ring layout of the graph, and `plot(G,'XData',X,'YData',Y,'ZData',Z)` specifies the `(X,Y,Z)` coordinates of the graph nodes.

`plot(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes (`gca`). The option, `ax`, can precede any of the input argument combinations in previous syntaxes.

`h = plot( ___ )` returns a `GraphPlot` object. Use this object to inspect and adjust the properties of the plotted graph.

Examples

Plot Graph

Create a graph using a sparse adjacency matrix, and then plot the graph.

```
n = 10;
A = delsq(numgrid('L',n+2));
G = graph(A,'OmitSelfLoops')
```

```
G =
  graph with properties:

    Edges: [130×2 table]
    Nodes: [75×0 table]
```

```
plot(G)
```

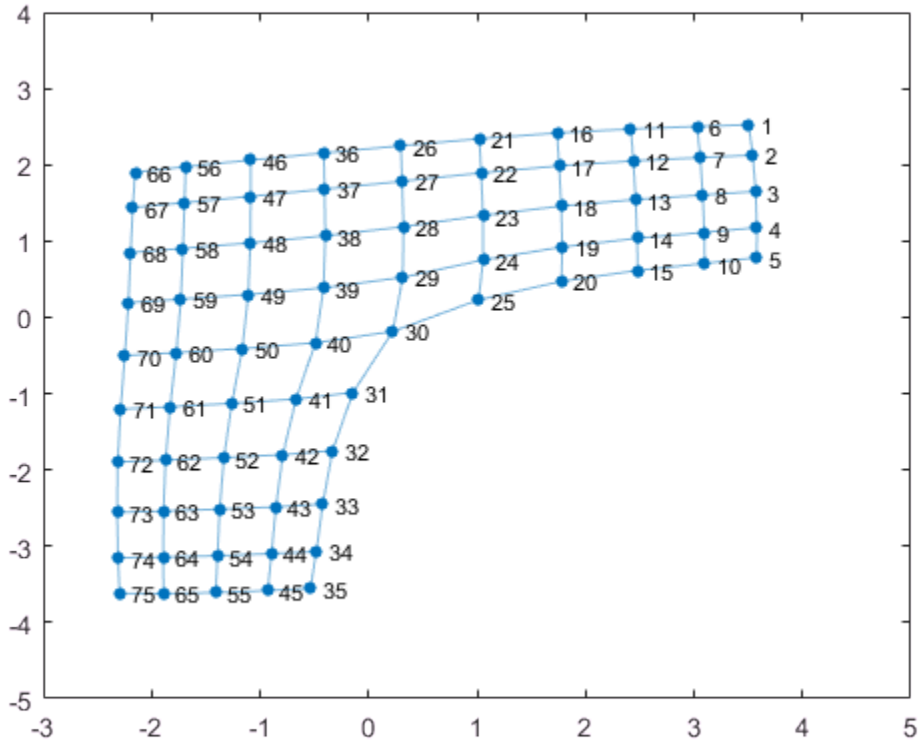

Plot Graph Using Line Specifier

Create and plot a graph. Specify the `LineSpec` input to change the `Marker`, `NodeColor`, and/or `LineStyle` of the graph plot.

```
G = graph(bucky);
plot(G,'-.dr','NodeLabel',{})
```

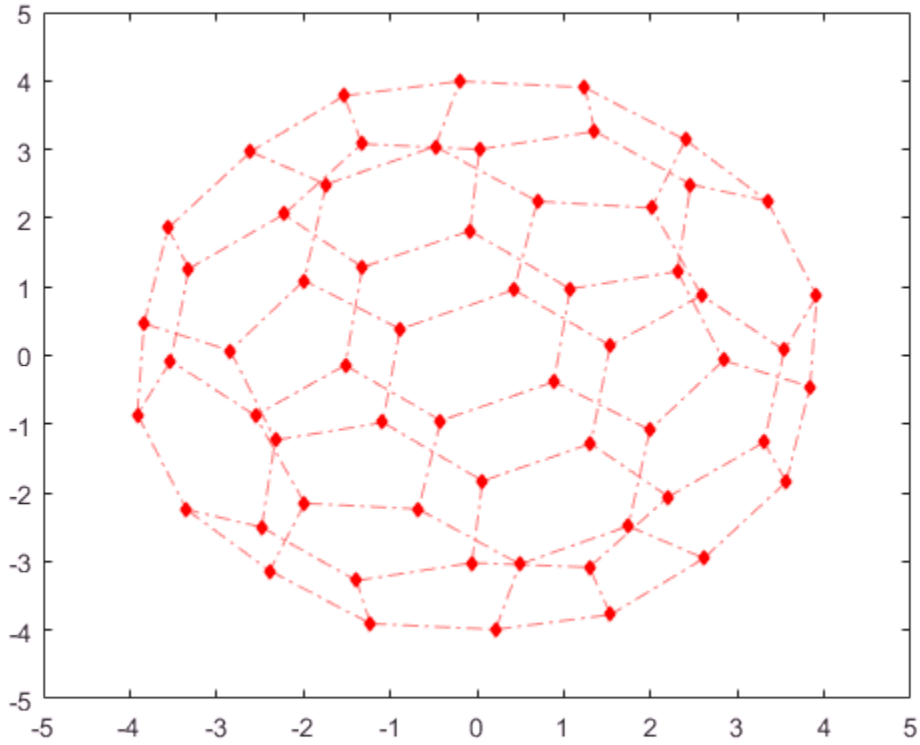

Plot Graph with Specified Layout

Create a directed graph, and then plot the graph using the `'force'` layout.

```
G = digraph(1,2:5);
G = addedge(G,2,6:15);
G = addedge(G,15,16:20)
```

```
G = 
  digraph with properties:

    Edges: [19×1 table]
    Nodes: [20×0 table]
```

```
plot(G,'Layout','force')
```

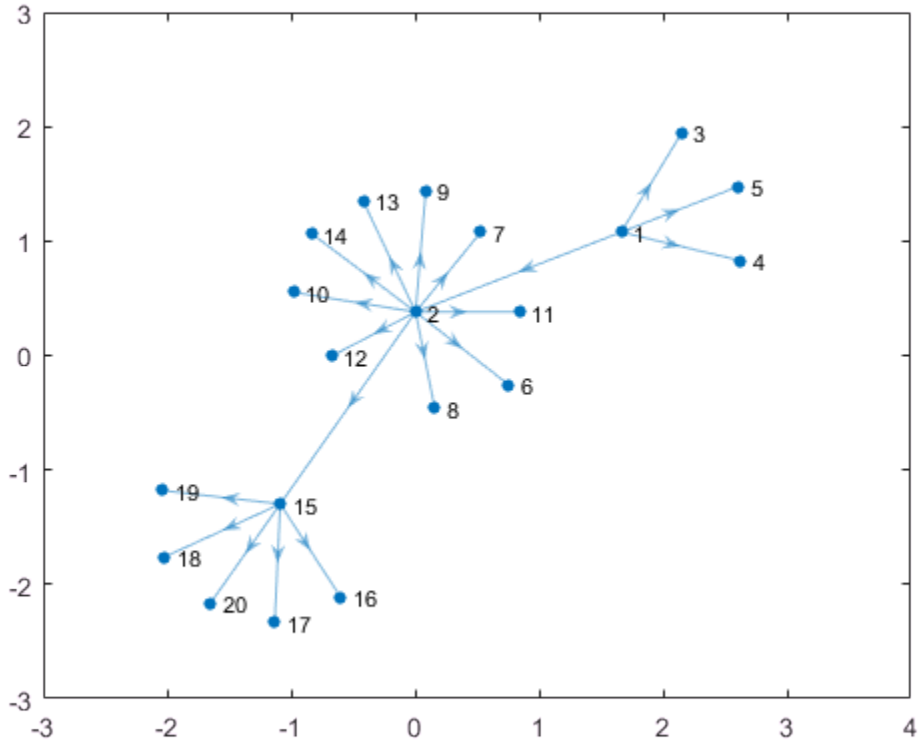

Custom Graph Node Coordinates

Create a weighted graph.

```
s = [1 1 1 1 1 2 2 7 7 9 3 3 1 4 10 8 4 5 6 8];
t = [2 3 4 5 7 6 7 5 9 6 6 10 10 10 11 11 8 8 11 9];
weights = [1 1 1 1 3 3 2 4 1 6 2 8 8 9 3 2 10 12 15 16];
G = graph(s,t,weights)
```

```
G 
  graph with properties:

    Edges: [20×2 table]
    Nodes: [11×0 table]
```

Plot the graph using custom coordinates for the nodes. The x-coordinates are specified using `XData`, the y-coordinates are specified using `YData`, and the z-coordinates are specified using `ZData`. Use `EdgeLabel` to label the edges using the edge weights.

```
x = [0 0.5 -0.5 -0.5 0.5 0 1.5 0 2 -1.5 -2];
y = [0 0.5 0.5 -0.5 -0.5 2 0 -2 0 0 0];
z = [5 3 3 3 3 0 1 0 0 1 0];
plot(G,'XData',x,'YData',y,'ZData',z,'EdgeLabel',G.Edges.Weight)
```

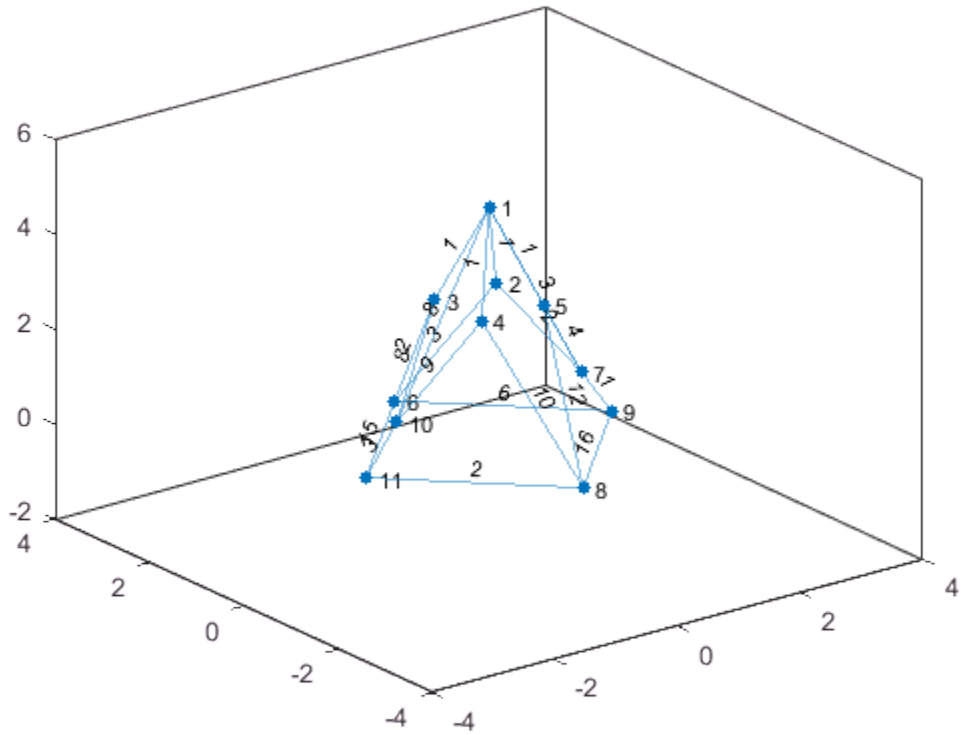

View the graph from above.

```
view(2)
```

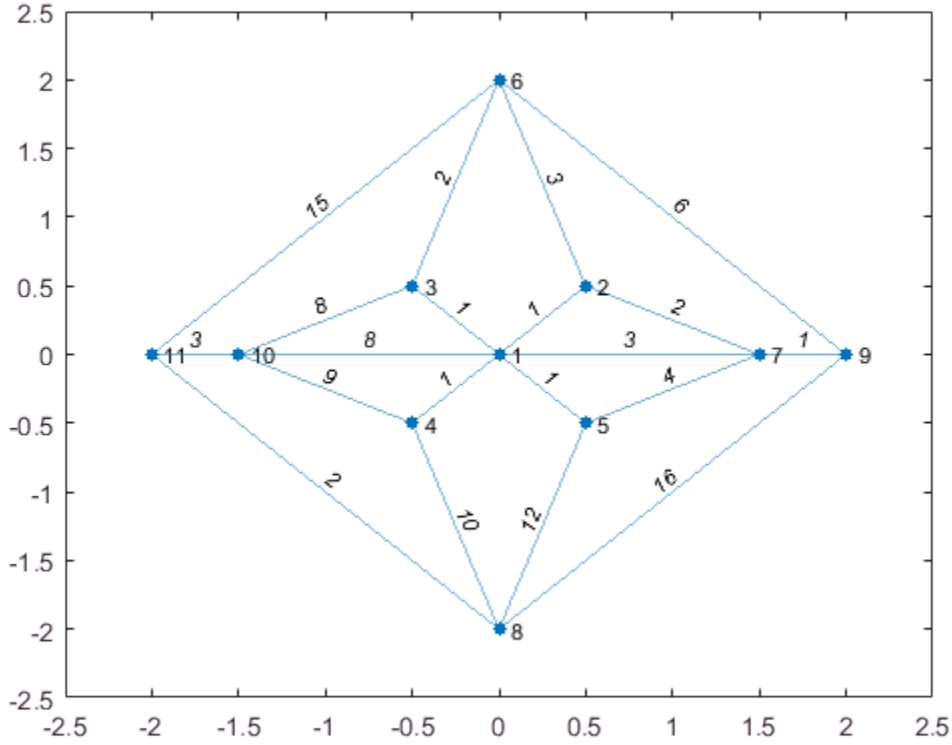

Edge Line Width Proportional to Edge Weight

Create a weighted graph.

```
s = [1 1 1 1 2 2 3 4 4 5 6];
t = [2 3 4 5 3 6 6 5 7 7 7];
weights = [50 10 20 80 90 90 30 20 100 40 60];
G = graph(s,t,weights)
```

```
G = 
  graph with properties:

    Edges: [11×2 table]
    Nodes: [7×0 table]
```

Plot the graph, labeling the edges with their weights, and making the width of the edges proportional to their weights. Use a rescaled version of the edge weights to determine the width of each edge, such that the widest line has a width of 5.

```
LWidths = 5*G.Edges.Weight/max(G.Edges.Weight);
plot(G,'EdgeLabel',G.Edges.Weight,'LineWidth',LWidths)
```

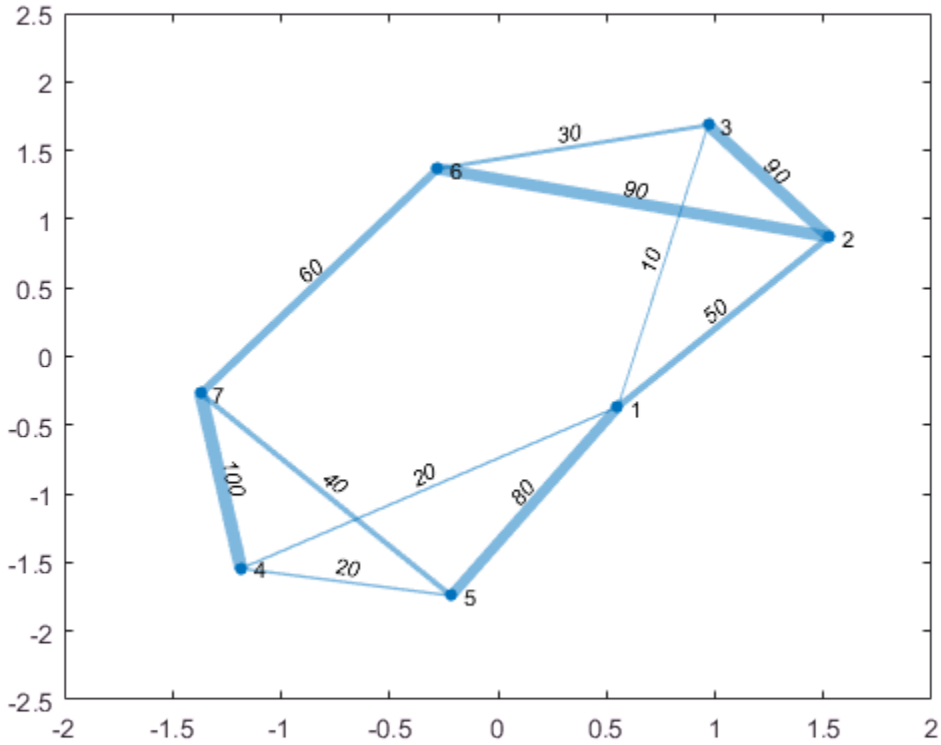

Label Graph Nodes and Edges

Create a directed graph, and then plot the graph with custom labels for the nodes and edges.

```
s = [1 1 1 2 2 3 3 4 4 5 6 7];
t = [2 3 4 5 6 5 7 6 7 8 8 8];
G = digraph(s,t)
```

```
G =
  digraph with properties:

    Edges: [12×1 table]
    Nodes: [8×0 table]
```

```
eLabels = {'x' 'y' 'z' 'y' 'z' 'x' 'z' 'x' 'y' 'z' 'y' 'x'};
nLabels = {'{0}','{x}','{y}','{z}','{x,y}','{x,z}','{y,z}','{x,y,z}'};
plot(G,'Layout','force','EdgeLabel',eLabels,'NodeLabel',nLabels)
```

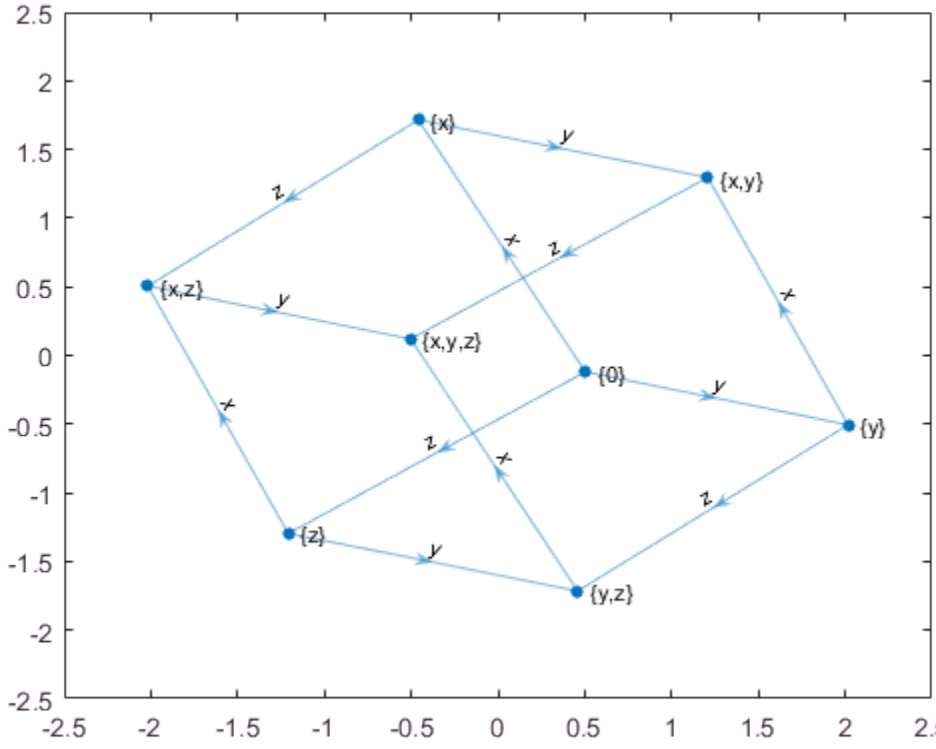

Adjust GraphPlot Properties

Create and plot a directed graph. Specify an output argument to `plot` to return a handle to the `GraphPlot` object.

```
s = [1 1 1 2 2 3 3 4 5 5 6 7 7 8 8 9 10 11];
t = [2 3 10 4 12 4 5 6 6 7 9 8 10 9 11 12 11 12];
G = digraph(s,t)
```

```
G = 
  digraph with properties:

    Edges: [18×1 table]
    Nodes: [12×0 table]
```

```
p = plot(G)
```

```
p = 
  GraphPlot with properties:

     NodeColor: [0 0.4470 0.7410]
    MarkerSize: 4
        Marker: 'o'
     EdgeColor: [0 0.4470 0.7410]
     LineWidth: 0.5000
     LineStyle: '-'
     NodeLabel: {'1'  '2'  '3'  '4'  '5'  '6'  '7'  '8'  '9'  '10'  '11'  '12'}
     EdgeLabel: {}
         XData: [2.5000 1.5000 2.5000 2 3 2 3 3 2.5000 4 3.5000 2.5000]
         YData: [7 6 6 5 5 4 4 3 2 3 2 1]
         ZData: [0 0 0 0 0 0 0 0 0 0 0 0]

  Show all properties
```

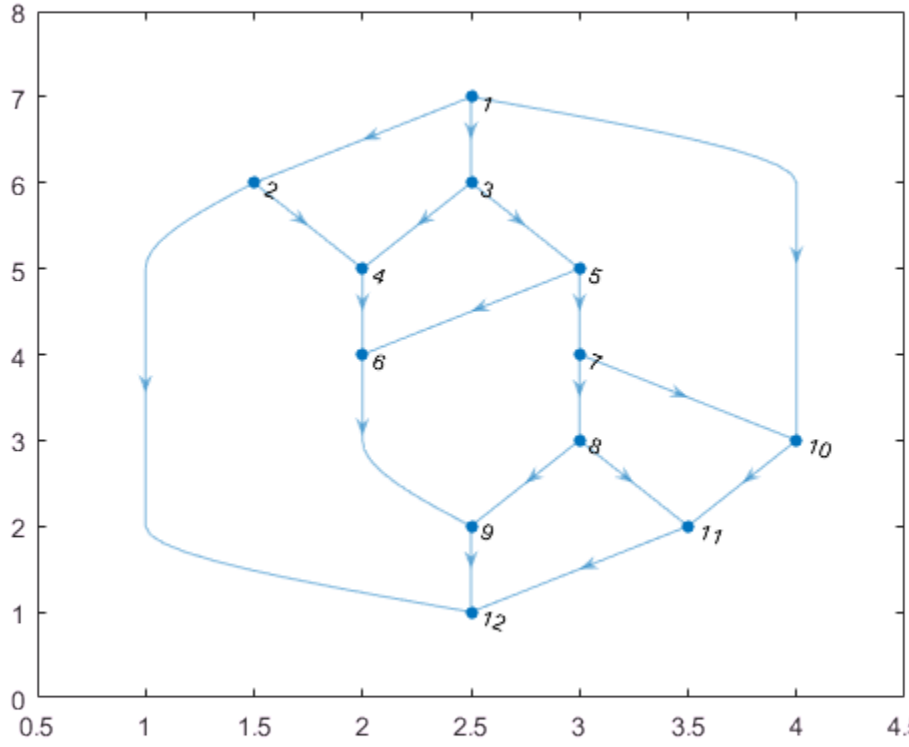

Change the color and marker of the nodes.

```
p.Marker = 's';
p.NodeColor = 'r';
```

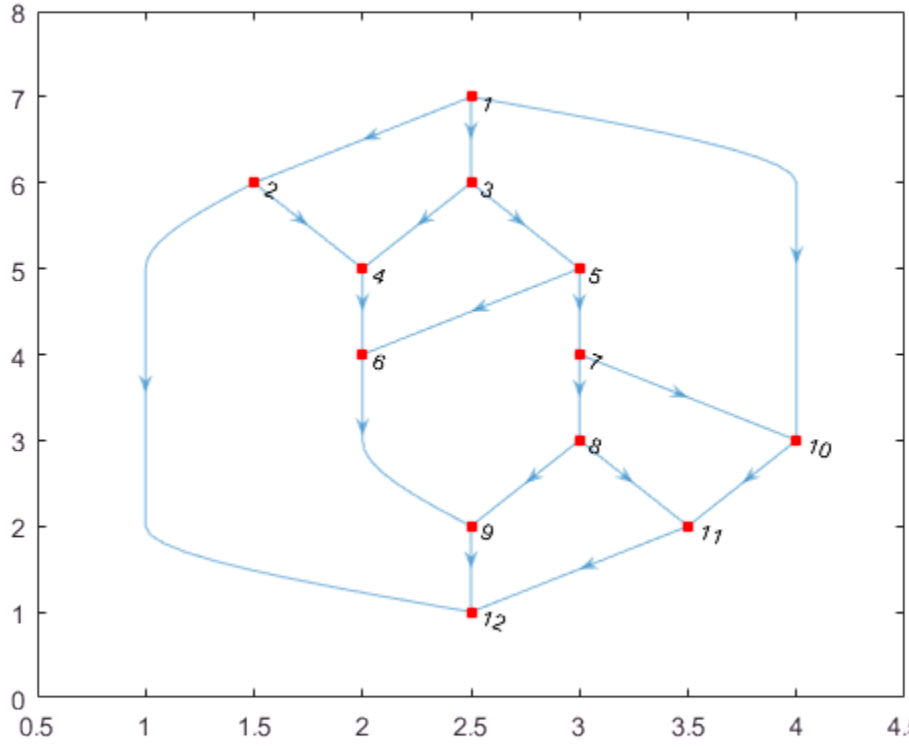

Increase the size of the nodes.

```
p.MarkerSize = 7;
```

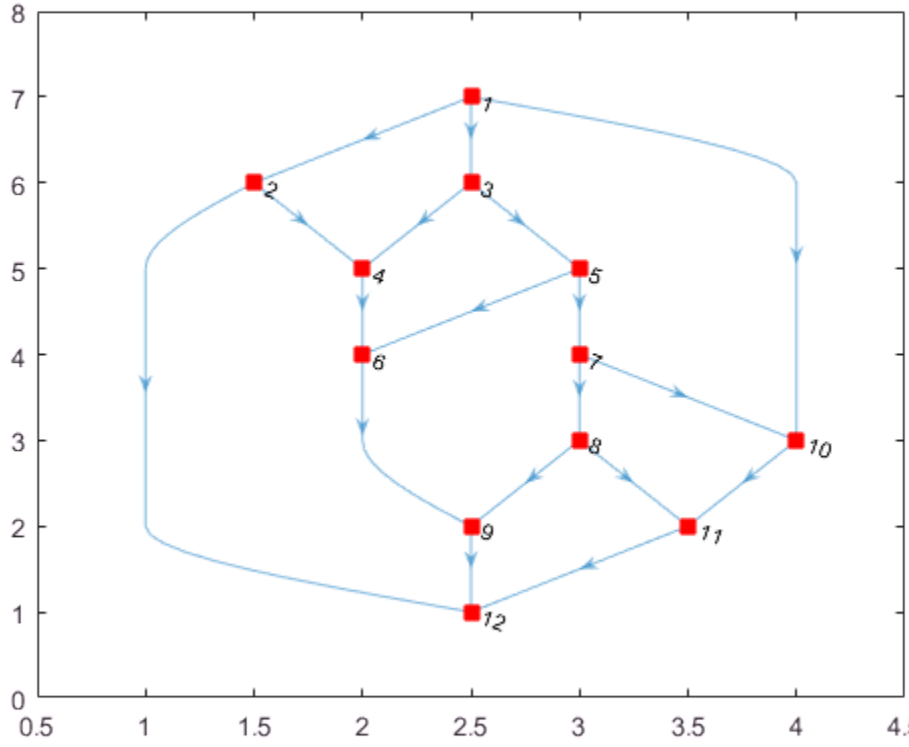

Change the line style of the edges.

```
p.LineStyle = '--';
```

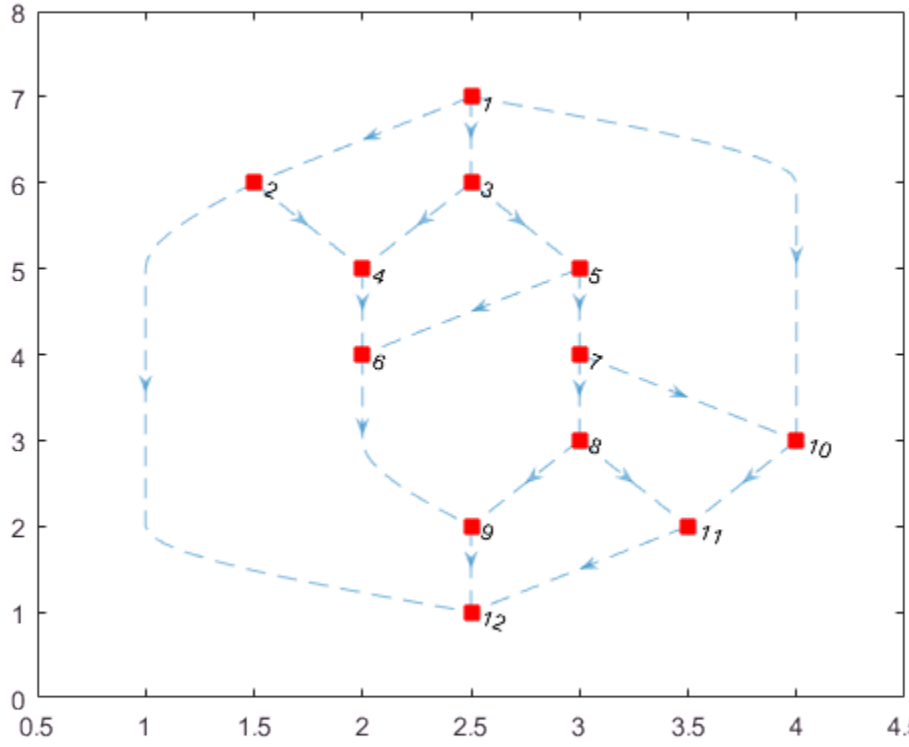

Change the x and y coordinates of the nodes.

```
p.XData = [2 4 1.5 3.5 1 3 1 2.1 3 2 3.1 4];
p.YData = [3 3 3.5 3.5 4 4 2 2 2 1 1 1];
```

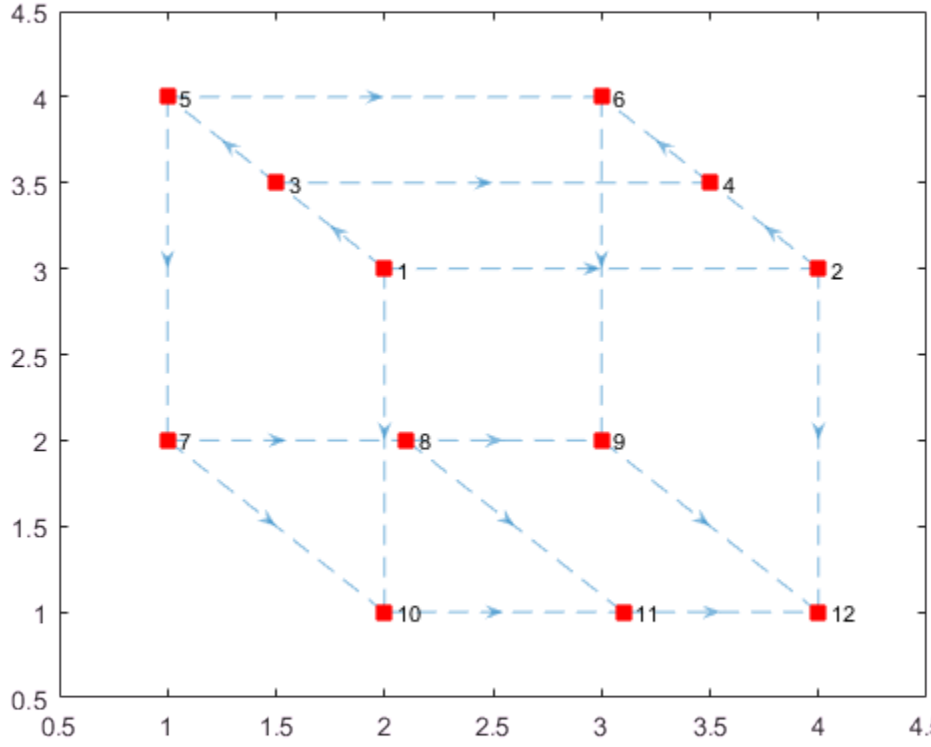

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

`LineSpec` — Line style, marker symbol, and color
character vector

Line style, marker symbol, and color, specified as a character vector of symbols. The symbols can appear in any order, and you can omit one or more of the characteristics. If you omit the line style, then the plot shows solid lines for the graph edges.

Example: `'--or'` uses red circle node markers and red dashed lines as edges.

Example: `'r*'` uses red asterisk node markers and solid red lines as edges.

Symbol	Line Style
`-`	Solid line (default)
`--`	Dashed line
`:`	Dotted line
`-.`	Dash-dot line

Symbol	Marker
`o`	Circle
`+`	Plus sign
`*`	Asterisk
`.`	Point
`x`	Cross
`s`	Square
`d`	Diamond
`^`	Upward-pointing triangle
`v`	Downward-pointing triangle
`>`	Right-pointing triangle
`<`	Left-pointing triangle
`p`	Pentagram
`h`	Hexagram

Symbol	Color
y	yellow
m	magenta
c	cyan
r	red
g	green
b	blue
w	white
k	black

ax — Axes object
object

Axes object. If you do not specify an axes object, then `plot` uses the current axes (`gca`).

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `p = plot(G,'EdgeColor','r','NodeColor','k','LineStyle','--')`

The graph properties listed here are only a subset. For a complete list, see GraphPlot Properties.

`'ArrowSize'` — Arrow size
positive value

Note: `ArrowSize` only affects the display of directed graphs created using `digraph`.

Arrow size, specified as the comma-separated pair consisting of `'ArrowSize'` and a positive value in point units. The default value of `ArrowSize` is `7` for graphs with 100 or fewer nodes, and `4` for graphs with more than 100 nodes.

Example: `15`

'EdgeAlpha' — Transparency of graph edges

0.5 (default) | scalar value between 0 and 1 inclusive

Transparency of graph edges, specified as the comma-separated pair consisting of 'EdgeAlpha' and a scalar value between 0 and 1 inclusive. A value of 1 means fully opaque and 0 means completely transparent (invisible).

Example: 0.25

'EdgeCData' — Color data of edge lines

vector

Color data of edge lines, specified as the comma-separated pair consisting of 'EdgeCData' and a vector with length equal to the number of edges in the graph. The values in EdgeCData map linearly to the colors in the current colormap, resulting in different colors for each edge in the plotted graph.

'EdgeColor' — Edge color

[0 0.4470 0.7410] (default) | RGB triplet or color name | 'flat' | 'none'

Edge color, specified as the comma-separated pair consisting of 'EdgeColor' and one of these values:

- 'none' — Edges are not drawn.
- 'flat' — Color of each edge depends on the value of EdgeCData.
- RGB triplet or a color name — Edges use the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]

Long Name	Short Name	RGB Triplet
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: plot(G,'EdgeColor','r') creates a graph plot with red edges.

'EdgeLabel' — Edge labels

{} (default) | vector | cell array of character vectors

Edge labels, specified as the comma-separated pair consisting of 'EdgeLabel' and a numeric vector or cell array of character vectors. The length of EdgeLabel must be equal to the number of edges in the graph. By default EdgeLabel is an empty cell array (no edge labels are displayed).

Example: {'A', 'B', 'C'}

Example: [1 2 3]

Example: plot(G,'EdgeLabel',G.Edges.Weight) labels the graph edges with their weights.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | cell

'Layout' — Graph layout method

'auto' (default) | 'circle' | 'force' | 'layered' | 'subspace' | 'force3' | 'subspace3'

Graph layout method, specified as the comma-separated pair consisting of 'Layout' and one of the options in the table. The table also lists compatible name-value pairs to further refine each layout method. See the layout reference page for more information on these layout-specific name-value pairs.

Option	Description	Name-Value Pairs
'auto' (default)	Automatic choice of layout method based on the size and structure of the graph.	—
'circle'	Circular layout. Places the graph nodes on a circle centered at the origin with radius 1.	—

Option	Description	Name-Value Pairs

`'force'`	Force-directed layout [1]. Uses attractive forces between adjacent nodes and repulsive forces between distant nodes.	`'Iterations'`
		`'XStart'`
		`'YStart'`

`'layered'`	Layered node layout [2], [3], [4]. Places the graph nodes into a set of layers, revealing hierarchical structure. By default the layers progress downwards (the arrows of a directed acyclic graph point down).	`'Direction'`
		`'Sources'`
		`'Sinks'`
		`'AssignLayers'`

`'subspace'`	Subspace embedding node layout [5]. Plots the graph nodes in a high-dimensional embedded subspace, and then projects the positions back into 2-D. By default the subspace dimension is either 100 or the total number of nodes, whichever is smaller.	`'Dimension'`

`'force3'`	3-D force-directed layout.	`'Iterations'`
		`'XStart'`
		`'YStart'`
		`'ZStart'`

`'subspace3'`	3-D subspace embedding layout.	`'Dimension'`

Example: `plot(G,'Layout','force3','Iterations',10)`

Example: `plot(G,'Layout','subspace','Dimension',50)`

Example: `plot(G,'Layout','layered')`

`'LineStyle'` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as the comma-separated pair consisting of `'LineStyle'` and one of the line styles listed in this table.

Character(s)	Line Style	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Edge line width

`0.5` (default) | positive value

Edge line width, specified as the comma-separated pair consisting of `'LineWidth'` and a positive value in point units.

Example: `0.75`

`'Marker'` — Node marker symbol

`'o'` (default) | character vector

Node marker symbol, specified as the comma-separated pair consisting of `'Marker'` and one of the character vectors listed in this table. The default is to use circular markers for the graph nodes.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross

Value	Description
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'+'`

Example: `'diamond'`

`'MarkerSize'` — Node marker size

positive value

Node marker size, specified as the comma-separated pair consisting of `'MarkerSize'` and a positive value in point units. The default value of `MarkerSize` is 4 for graphs with 100 or fewer nodes, and `2` for graphs with more than 100 nodes.

Example: `10`

`'NodeCData'` — Color data of node markers

vector

Color data of node markers, specified as the comma-separated pair consisting of `'NodeCData'` and a vector with length equal to the number of nodes in the graph. The values in `NodeCData` map linearly to the colors in the current colormap, resulting in different colors for each node in the plotted graph.

`'NodeColor'` — Node color

`[0 0.4470 0.7410]` (default) | RGB triplet or color name | `'flat'` | `'none'`

Node color, specified as the comma-separated pair consisting of `'NodeColor'` and one of these values:

- `'none'` — Nodes are not drawn.
- `'flat'` — Color of each node depends on the value of `NodeCData`.
- RGB triplet or a color name — Nodes use the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `plot(G,'NodeColor','k')` creates a graph plot with black nodes.

`'NodeLabel'` — Node labels

node IDs (default) | vector | cell array of character vectors

Node labels, specified as the comma-separated pair consisting of `'NodeLabel'` and a numeric vector or cell array of character vectors. The length of `NodeLabel` must be equal to the number of nodes in the graph. By default `NodeLabel` is a cell array containing the node IDs for the graph nodes:

- For nodes without names (that is, `G.Nodes` does not contain a `Name` variable), the node labels are the values `unique(G.Edges.EndNodes)` contained in a cell array.
- For named nodes, the node labels are `G.Nodes.Name'`.

Example: `{'A', 'B', 'C'}`

Example: `[1 2 3]`

Example: `plot(G,'NodeLabel',G.Nodes.Name)` labels the nodes with their names.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `cell`

`'XData'` — x-coordinate of nodes
vector

Note: `XData` and `YData` must be specified together so that each node has a valid (*x*,*y*) coordinate. Optionally, you can also specify `ZData` for 3-D coordinates.

---

x-coordinate of nodes, specified as the comma-separated pair consisting of `'XData'` and a vector with length equal to the number of nodes in the graph.

`'YData'` — y-coordinate of nodes
vector

Note: `XData` and `YData` must be specified together so that each node has a valid (*x*,*y*) coordinate. Optionally, you can also specify `ZData` for 3-D coordinates.

---

y-coordinate of nodes, specified as the comma-separated pair consisting of `'YData'` and a vector with length equal to the number of nodes in the graph.

`'ZData'` — z-coordinate of nodes
vector

Note: `XData` and `YData` must be specified together so that each node has a valid (*x*,*y*) coordinate. Optionally, you can also specify `ZData` for 3-D coordinates.

---

z-coordinate of nodes, specified as the comma-separated pair consisting of `'ZData'` and a vector with length equal to the number of nodes in the graph.

Output Arguments

`h` — Graph plot
`GraphPlot` object

Graph plot, returned as an object. For more information, see GraphPlot.

References

[1] Fruchterman, T., and E. Reingold. "Graph Drawing by Force-directed Placement." *Software — Practice & Experience*. Vol. 21 (11), 1991, pp. 1129–1164.

[2] Gansner, E., E. Koutsofios, S. North, and K.-P Vo. "A Technique for Drawing Directed Graphs." *IEEE Transactions on Software Engineering*. Vol.19, 1993, pp. 214–230.

[3] Barth, W., M. Juenger, and P. Mutzel. "Simple and Efficient Bilayer Cross Counting." *Journal of Graph Algorithms and Applications*. Vol.8 (2), 2004, pp. 179–194.

[4] Brandes, U., and B. Koepf. "Fast and Simple Horizontal Coordinate Assignment." *LNCS*. Vol. 2265, 2002, pp. 31–44.

[5] Y. Koren. "Drawing Graphs by Eigenvectors: Theory and Practice." *Computers and Mathematics with Applications*. Vol. 49, 2005, pp. 1867–1888.

See Also

See Also

`digraph` | `graph` | `highlight` | `labeledge` | `labelnode` | `layout`

Topics

GraphPlot
GraphPlot Properties
"Graph Plotting and Customization"
"Add Node Properties to Graph Plot Data Cursor"

Introduced in R2015b

rmedge

Remove edge from graph

Syntax

```
H = rmedge(G,s,t)
H = rmedge(G,idx)
```

Description

`H = rmedge(G,s,t)` removes the edges specified by the node pairs `s` and `t` from graph `G`.

`H = rmedge(G,idx)` specifies which edges to remove with edge indices `idx`. The edge indices are row numbers in the `G.Edges` table.

Examples

Remove Edges with Specified End Nodes

Create and plot a graph.

```
s = [1 1 1 2 2 3 3 4 5 5 6 7];
t = [2 4 5 3 6 4 7 8 6 8 7 8];
G = graph(s,t);
plot(G)
```

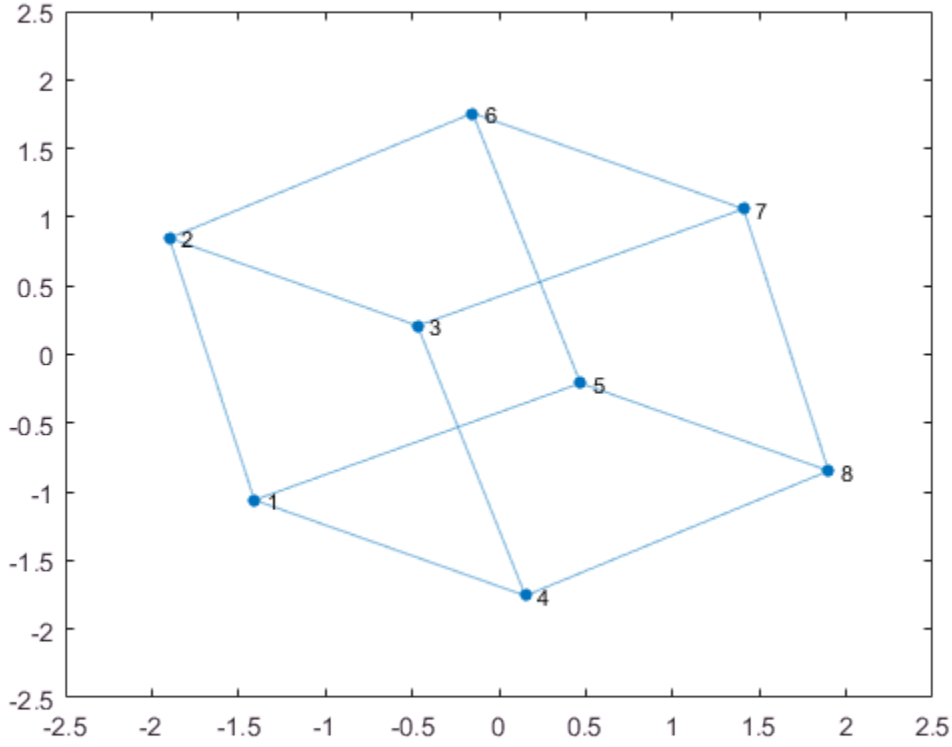

Remove several edges from the graph and plot the result.

```
G = rmedge(G,[1 2 3 4],[5 6 7 8]);
plot(G)
```

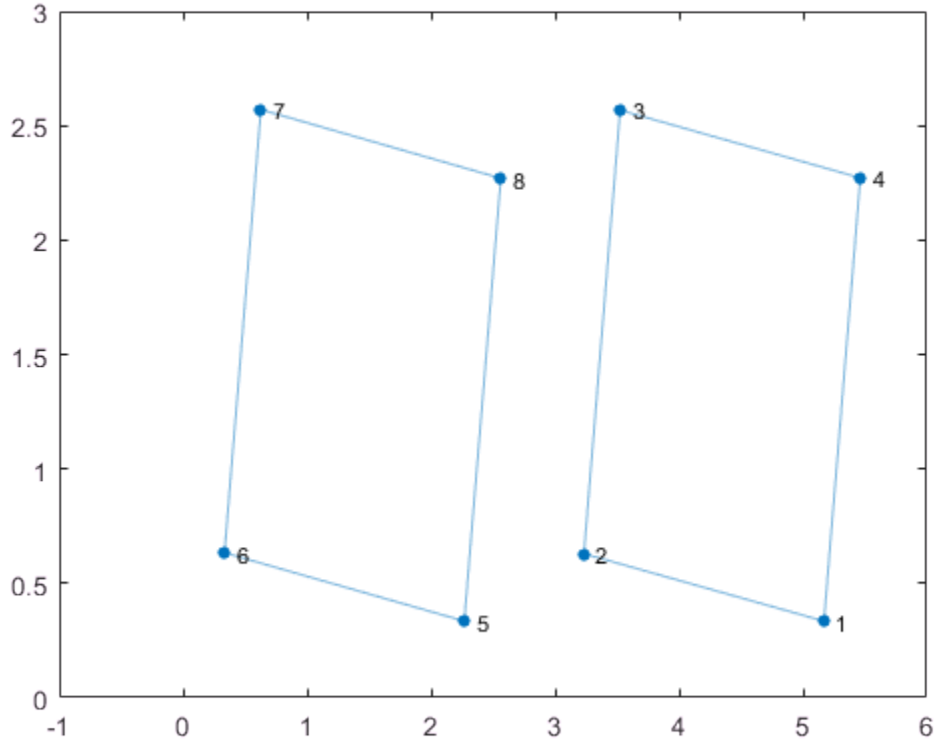

Remove Edge with Specified Index

Create a graph and view the edge list.

```
s = {'BOS' 'NYC' 'NYC' 'NYC' 'LAX'};
t = {'NYC' 'LAX' 'DEN' 'LAS' 'DCA'};
G = digraph(s,t);
G.Edges
```

```
ans = 5×1 table
       EndNodes
    ______________
```

```
    'BOS'    'NYC'
    'NYC'    'LAX'
    'NYC'    'DEN'
    'NYC'    'LAS'
    'LAX'    'DCA'
```

Remove the edge between nodes `'NYC'` and `'DEN'` using the edge index.

```
G = rmedge(G,3);
G.Edges
```

```
ans = 4×1 table
       EndNodes
    _____________

    'BOS'    'NYC'
    'NYC'    'LAX'
    'NYC'    'LAS'
    'LAX'    'DCA'
```

Remove Self-Loops

This example shows how to remove all of the self-loops from a graph. Self-loops are edges that connect a node to itself.

Create a graph that has two self-loops.

```
G = graph([1 1 1 2],[1 2 3 2]);
plot(G)
```

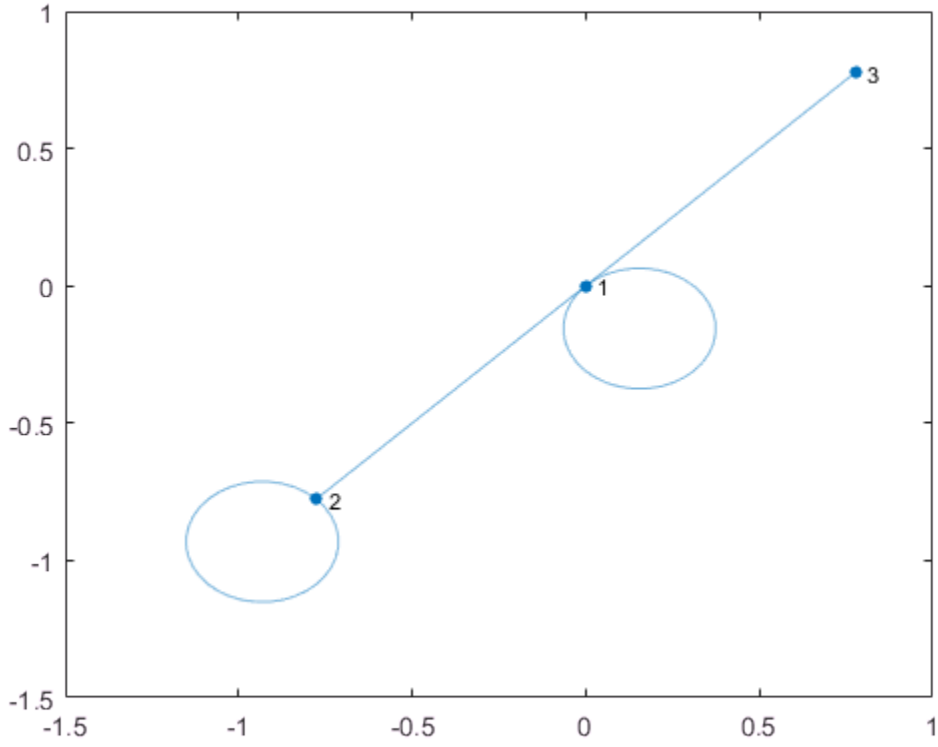

Use `rmedge` to remove all self-loops from the graph. Even though `G` has only two self-loops, this technique removes all self-loops from any directed or undirected graph.

```
G = rmedge(G, 1:numnodes(G), 1:numnodes(G));
plot(G)
```

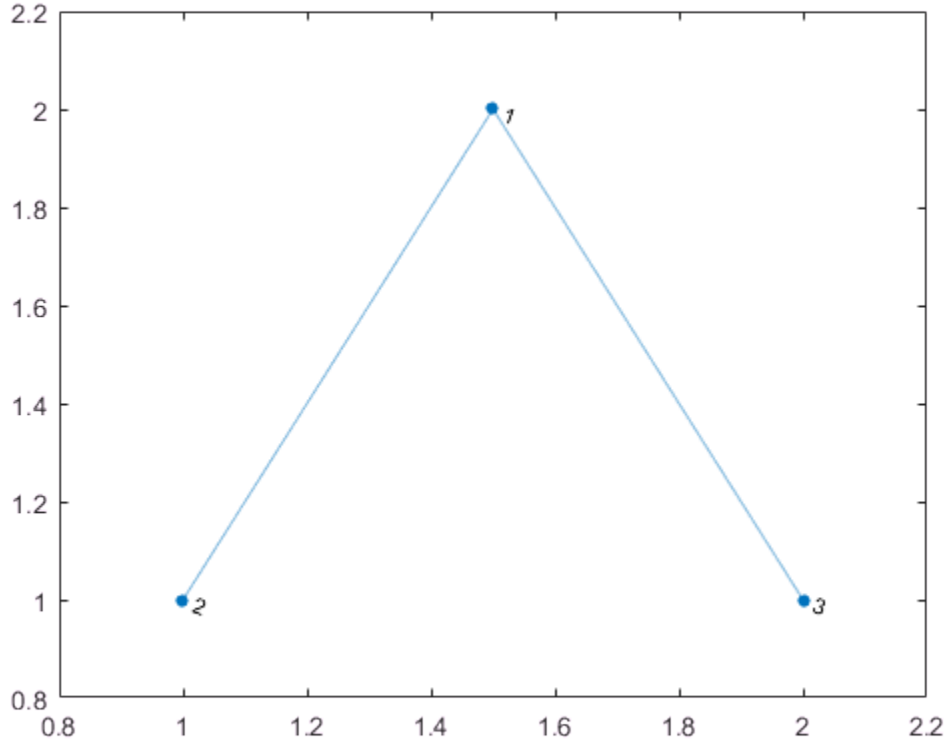

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: `G = digraph([1 2],[2 3])`

`s,t` — Node pairs (as separate arguments)
scalars | vectors | character vectors | cell arrays of character vectors

Node pairs, specified as separate arguments of scalars, vectors, character vectors, or cell arrays of character vectors. Similarly located elements in `s` and `t` specify the source and target nodes for an edge in the graph.

Example: `G = rmedge(G,1,2)` removes the edge between node 1 and node 2 from graph `G`.

Example: `G = rmedge(G,{'a' 'b'},{'d' 'c'})` removes two edges from graph `G`, the first of which is between node `'a'` and node `'d'`.

`idx` — Edge indices
scalar | vector

Edge indices, specified as a scalar or vector. The edge indices are nonnegative integers that are row numbers in the `G.Edges` table.

Example: `G = rmedge(G,[1 3 5])` removes the first, third, and fifth edges (rows) from `G.Edges`.

Output Arguments

`H` — Output graph
`graph` object | `digraph` object

Output graph, returned as a `graph` or `digraph` object.

For more information, see graph or digraph.

See Also

See Also
`addedge` | `graph` | `numedges` | `rmnode`

Topics
"Directed and Undirected Graphs"

"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"

Introduced in R2015b

rmnode

Remove node from graph

Syntax

```
H = rmnode(G,nodeIDs)
```

Description

`H = rmnode(G,nodeIDs)` removes the nodes specified by `nodeIDs` from graph `G`. Any edges incident upon the nodes in `nodeIDs` are also removed. `rmnode` refreshes the numbering of the nodes in `H`.

Examples

Remove Node from Graph

Create and plot a graph.

```
s = [1 1 1 2 2 3];
t = [2 3 4 3 4 4];
G = graph(s,t);
plot(G)
```

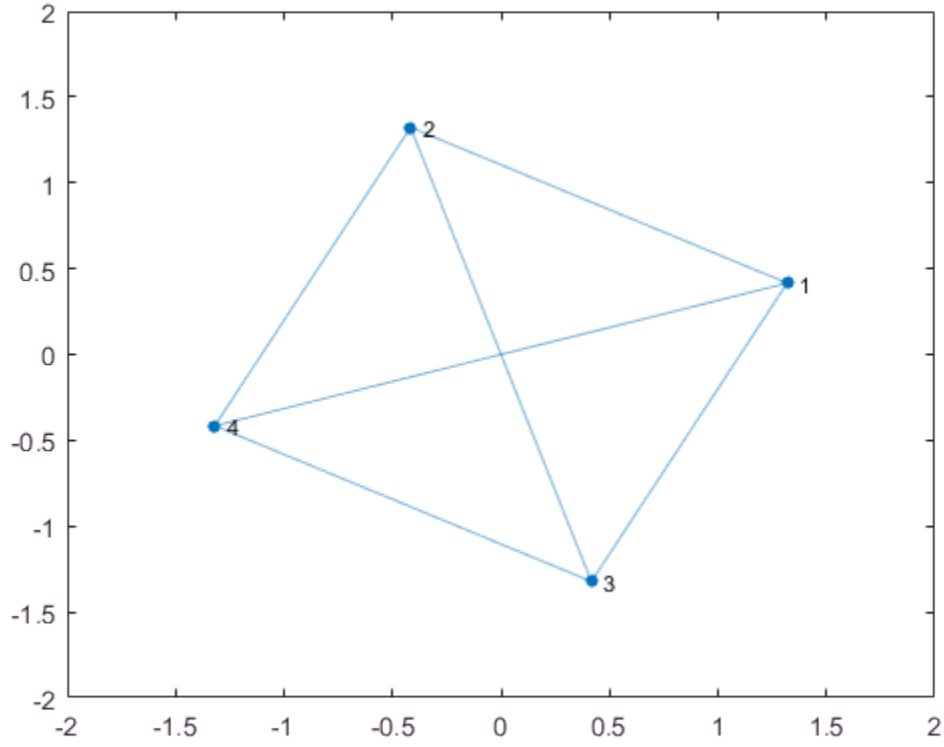

Remove node 1 from the graph and plot the result. The nodes in the new graph are automatically renumbered.

```
G = rmnode(G,1);
plot(G)
```

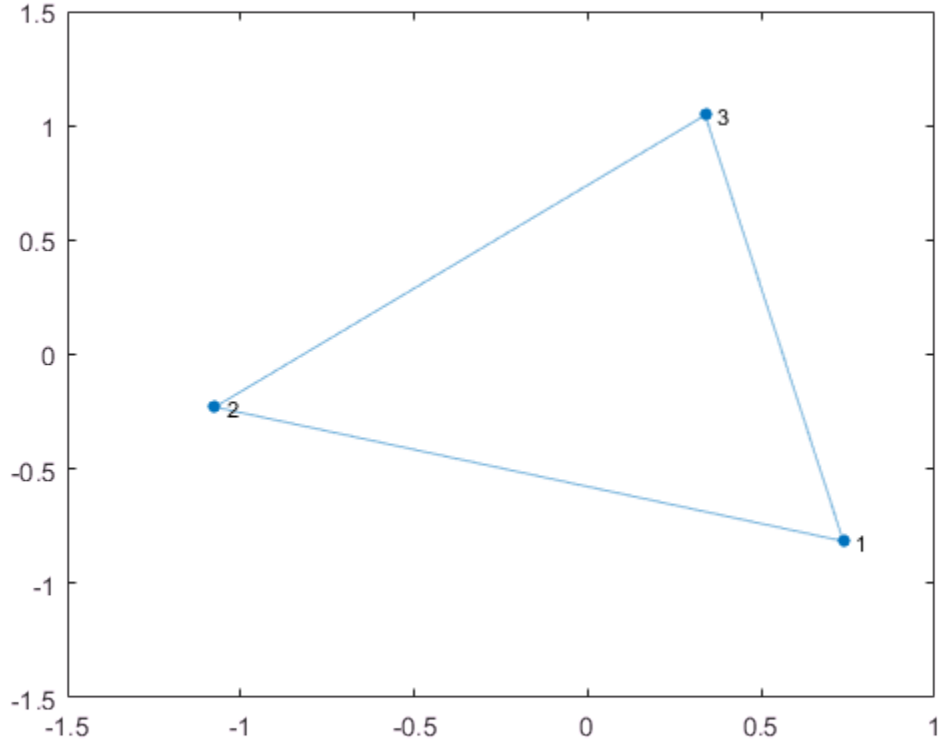

Remove Several Named Nodes from Graph

Create and plot a graph with named nodes.

```
s = [1 1 1 1 2 2 3 3 3 5 5];
t = [2 3 4 6 1 5 4 5 6 4 6];
names = {'New York' 'Los Angeles' 'Washington D.C.' 'Pittsburgh' ...
    'Denver' 'Austin'};
G = digraph(s,t,[],names);
plot(G)
```

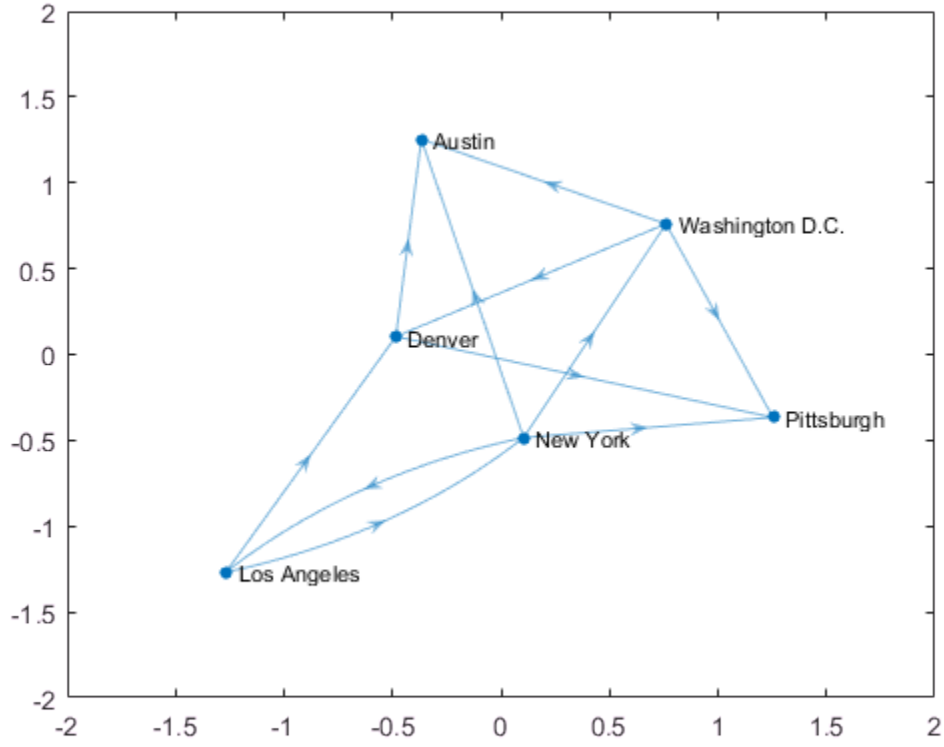

Remove the nodes `'New York'` and `'Pittsburgh'` from the graph, then replot the result.

```
G = rmnode(G,{'New York' 'Pittsburgh'});
plot(G,'Layout','force')
```

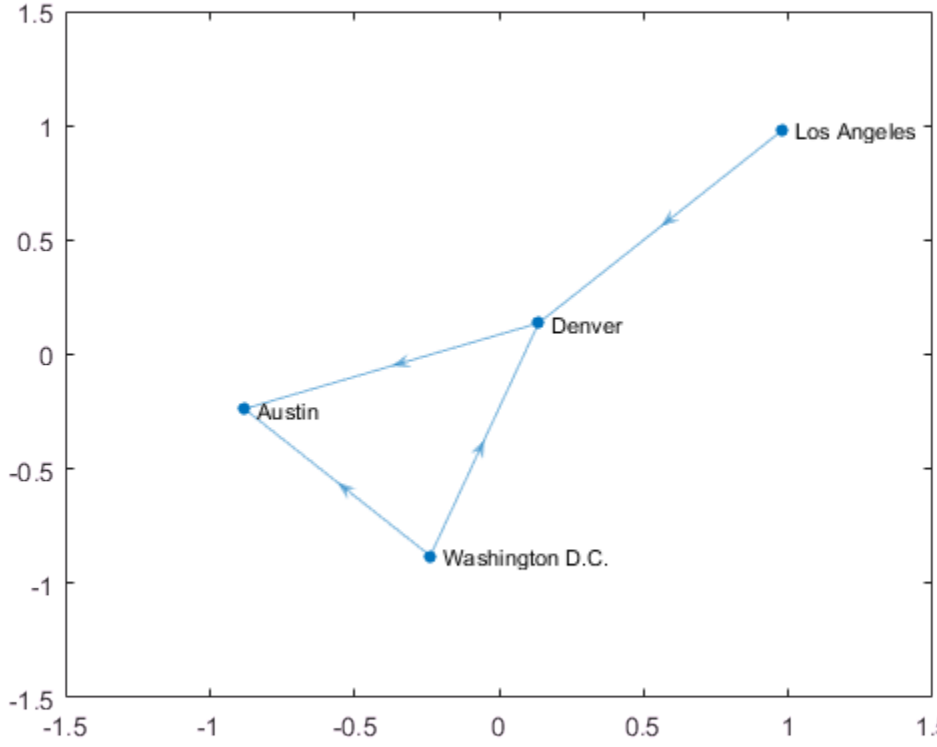

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: `G = digraph([1 2],[2 3])`

`nodeIDs` — Node identifiers

scalar | vector | matrix | character vector | cell array of character vectors

Node identifiers, specified as a scalar, vector, matrix, character vector, or cell array of character vectors.

Example: `G = rmnode(G,[1 2])` removes node 1 and node 2 from graph `G`.

Output Arguments

`H` — Output graph

`graph` object | `digraph` object

Output graph, returned as a `graph` or `digraph` object.

For more information, see graph or digraph.

See Also

See Also

`addnode` | `digraph` | `graph` | `numnodes` | `rmedge`

Topics

"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"

Introduced in R2015b

reordernodes

Reorder graph nodes

Syntax

```
H = reordernodes(G,order)
[H,idx] = reordernodes(G,order)
```

Description

`H = reordernodes(G,order)` reorders the nodes in graph `G` according to `order`. This reordering corresponds to a symmetric permutation of the adjacency matrix of `G`.

`[H,idx] = reordernodes(G,order)` also returns the permutation vector for the edge indices, `idx`. For example, if `G.Edges` has a variable `Weight`, then `H.Edges.Weight == G.Edges.Weight(idx)`.

Examples

Reorder Graph Nodes

Create and plot a graph.

```
s = [1 1 1 2 5 3 6 4 7 8 8 8];
t = [2 3 4 5 3 6 4 7 2 6 7 5];
G = graph(s,t);
plot(G)
```

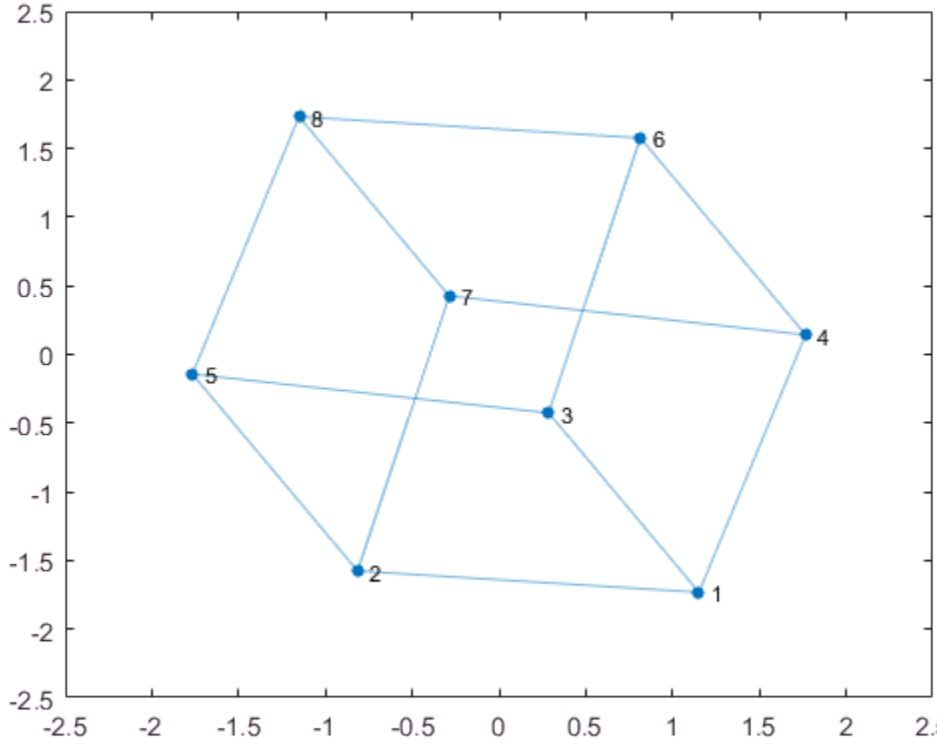

Reorder the graph nodes using a permutation vector.

```
order = [7 2 3 4 8 1 5 6];
G = reordernodes(G,order);
plot(G)
```

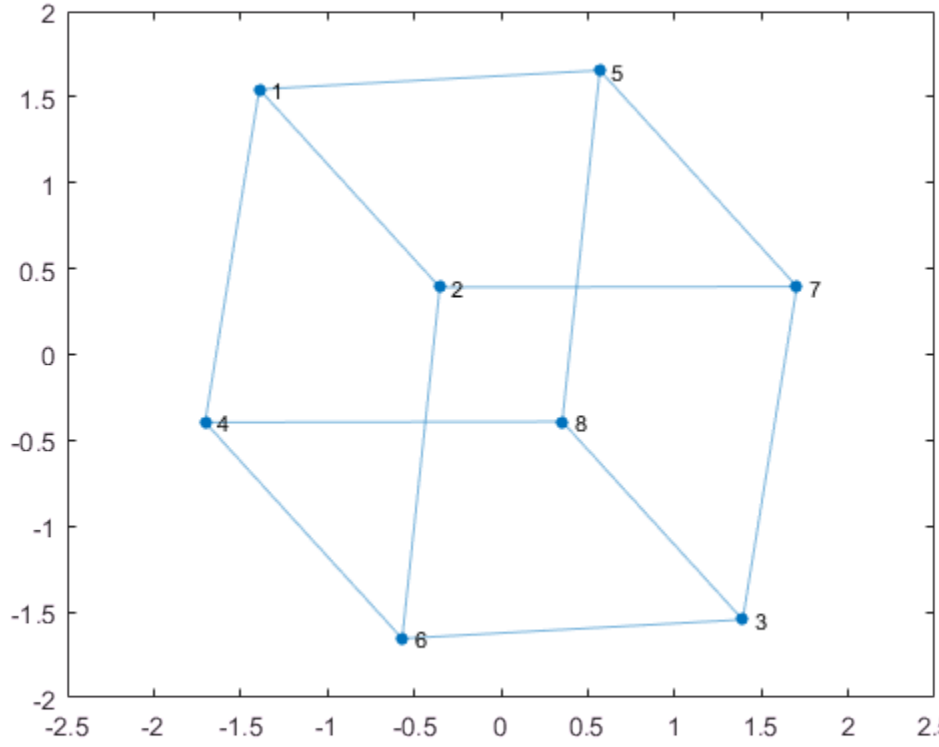

Reorder Graph Nodes by Degree

Create and plot a weighted graph.

```
s = [1 1 1 2 2 2 2 3 4];
t = [3 4 2 3 4 5 6 5 6];
weights = [6 7 6 3 2 8 7 1 1];
G = digraph(s,t,weights);
plot(G,'EdgeLabel',G.Edges.Weight)
```

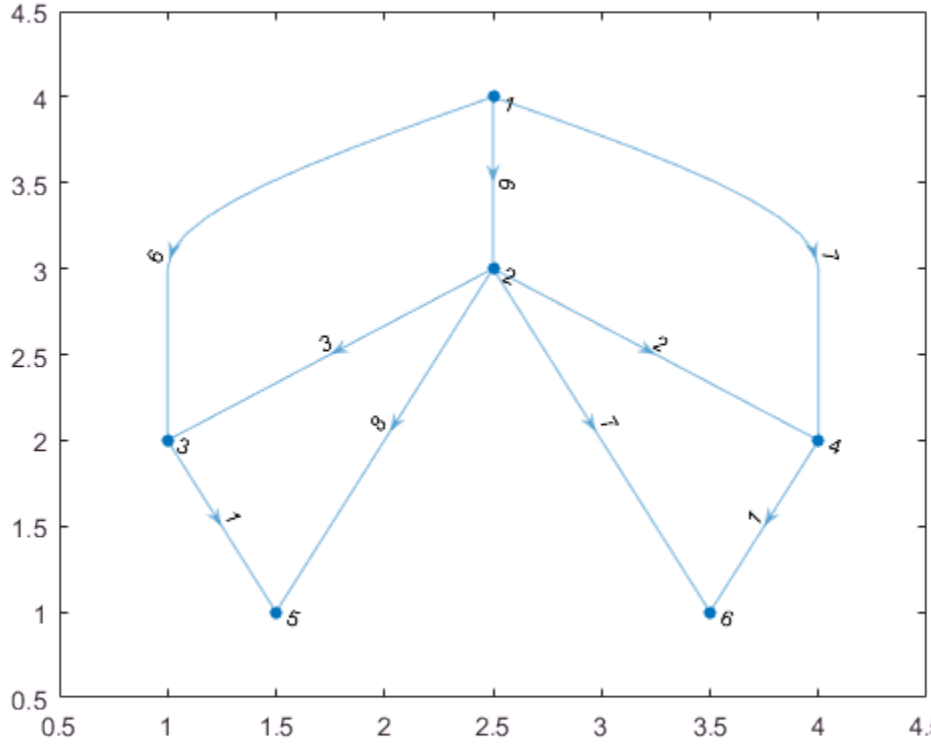

Reorder the graph nodes based on the out-degree, such that node 1 has the largest out-degree.

```
[~,order] = sort(outdegree(G),'descend')
```

```
order =

     2
     1
     3
     4
     5
     6
```

```
[H,idx] = reordernodes(G,order);
plot(H,'EdgeLabel',H.Edges.Weight)
```

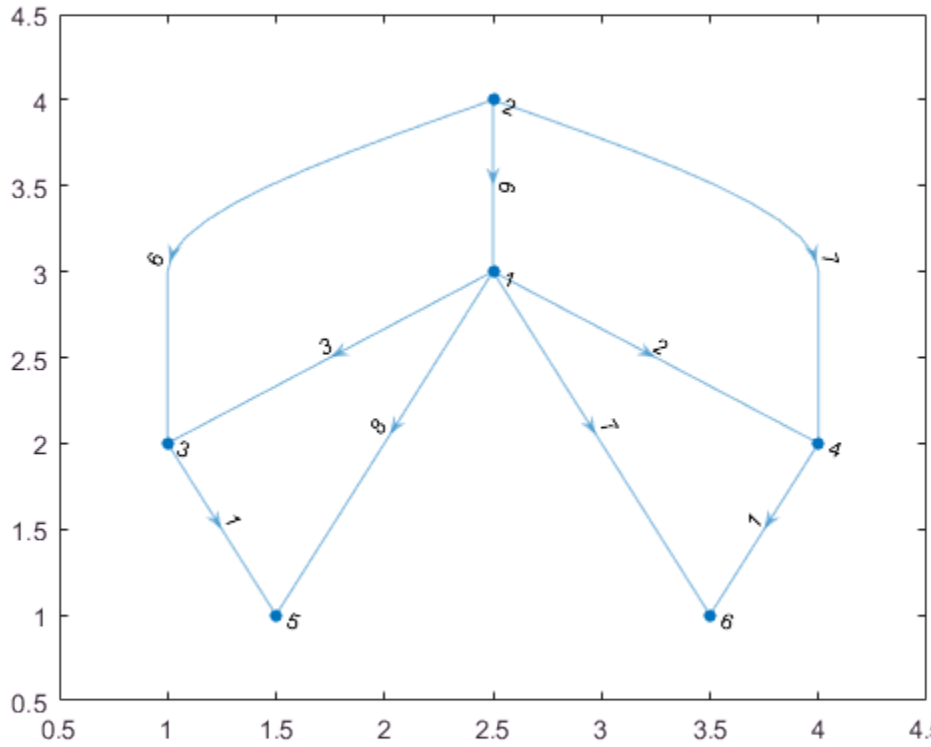

`idx` describes the permutation of the rows in `G.Edges`. Confirm this correspondence using the `Weight` variable.

```
isequal(H.Edges.Weight, G.Edges.Weight(idx))
```

```
ans = logical
   1
```

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: G = digraph([1 2],[2 3])

order — Node order

vector of indices | cell array of node names

Node order, specified as a vector of indices or cell array of node names. order specifies a symmetric permutation of the adjacency matrix of G. If A = adjacency(G), then A(order,order) produces adjacency(H).

Example: H = reordernodes(G,[3 1 2])

Output Arguments

H — Output graph

graph object | digraph object

Output graph, returned as a graph or digraph object. H contains the same Nodes and Edges properties as G, but with the rows of H.Nodes and H.Edges permuted:

- H.Nodes is the same as G.Nodes(order,:).
- H.Edges is similar to G.Edges(idx,:), except that the nodes are renumbered.

idx — Permutation vector of edge indices

vector

Permutation vector of edge indices, returned as a vector. The values in idx describe the permutation of the rows in G.Edges.

See Also

See Also

`addnode` | `digraph` | `findnode` | `graph` | `rmnode` | `subgraph`

Introduced in R2015b

shortestpath

Shortest path between two single nodes

Syntax

```
P = shortestpath(G,s,t)
P = shortestpath(G,s,t,'Method',algorithm)
[P,d] = shortestpath( ___ )
```

Description

`P = shortestpath(G,s,t)` computes the shortest path starting at source node `s` and ending at target node `t`. If the graph is weighted (that is, `G.Edges` contains a variable `Weight`), then those weights are used as the distances along the edges in the graph. Otherwise, all edge distances are taken to be `1`.

`P = shortestpath(G,s,t,'Method',algorithm)` optionally specifies the algorithm to use in computing the shortest path. For example, if `G` is a weighted graph, then `shortestpath(G,s,t,'Method','unweighted')` ignores the edge weights in `G` and instead treats all edge weights as `1`.

`[P,d] = shortestpath( ___ )` additionally returns the length of the shortest path, `d`, using any of the input arguments in previous syntaxes.

Examples

Shortest Path Between Specified Nodes

Create and plot a directed graph.

```
s = [1 1 2 3 3 4 4 6 6 7 8 7 5];
t = [2 3 4 4 5 5 6 1 8 1 3 2 8];
G = digraph(s,t);
plot(G)
```

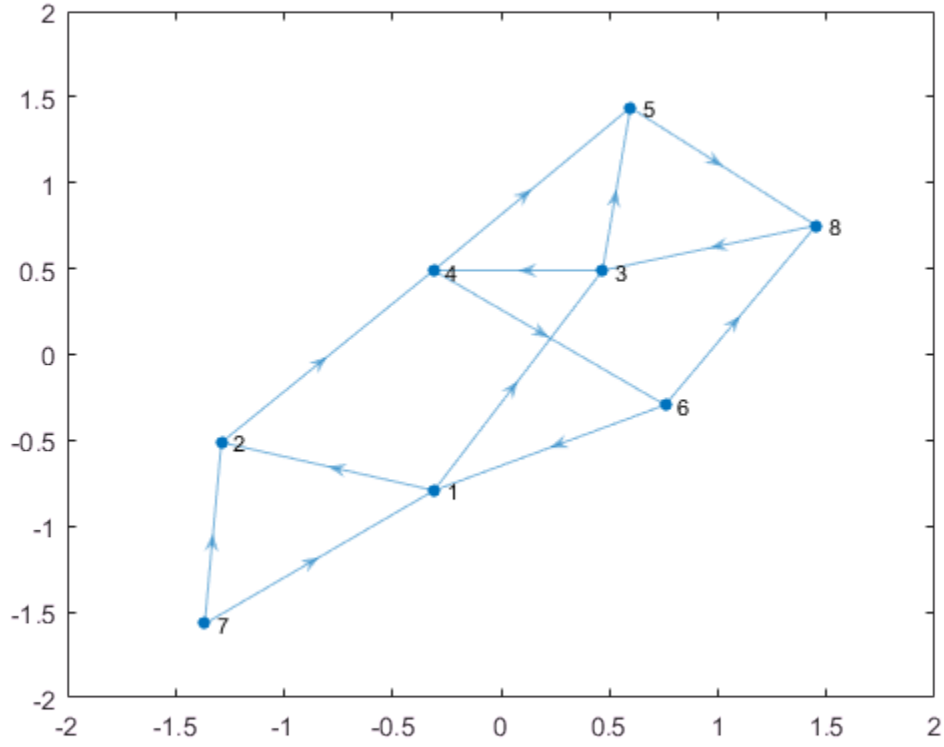

Calculate the shortest path between nodes 7 and 8.

```
P = shortestpath(G,7,8)
```

```
P =

     7     1     3     5     8
```

Shortest Path in Weighted Graph

Create and plot a graph with weighted edges.

```
s = [1 1 1 2 2 6 6 7 7 3 3 9 9 4 4 11 11 8];
```

```
t = [2 3 4 5 6 7 8 5 8 9 10 5 10 11 12 10 12 12];
weights = [10 10 10 10 10 1 1 1 1 1 1 1 1 1 1 1 1 1];
G = graph(s,t,weights);
plot(G,'EdgeLabel',G.Edges.Weight)
```

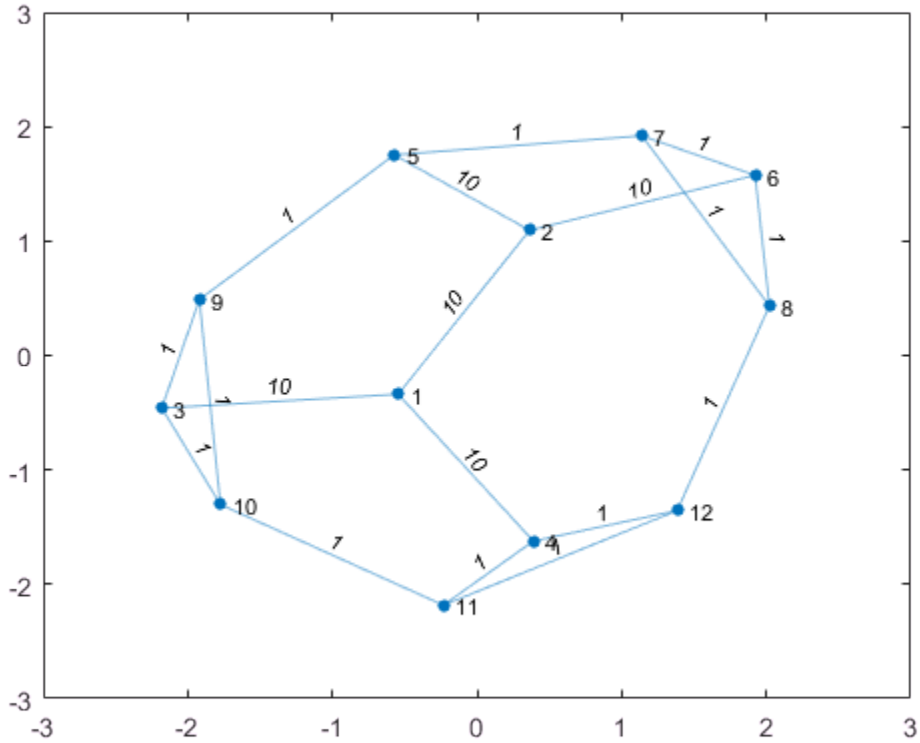

Find the shortest path between nodes 3 and 8, and specify two outputs to also return the length of the path.

```
[P,d] = shortestpath(G,3,8)
```

```
P =

     3     9     5     7     8
```

```
d = 4
```

Since the edges in the center of the graph have large weights, the shortest path between nodes 3 and 8 goes around the boundary of the graph where the edge weights are smallest. This path has a total length of 4.

Shortest Path Ignoring Edge Weights

Create and plot a graph with weighted edges, using custom node coordinates.

```
s = [1 1 1 1 1 2 2 7 7 9 3 3 1 4 10 8 4 5 6 8];
t = [2 3 4 5 7 6 7 5 9 6 6 10 10 10 11 11 8 8 11 9];
weights = [1 1 1 1 3 3 2 4 1 6 2 8 8 9 3 2 10 12 15 16];
G = graph(s,t,weights);

x = [0 0.5 -0.5 -0.5 0.5 0 1.5 0 2 -1.5 -2];
y = [0 0.5 0.5 -0.5 -0.5 2 0 -2 0 0 0];
p = plot(G,'XData',x,'YData',y,'EdgeLabel',G.Edges.Weight);
```

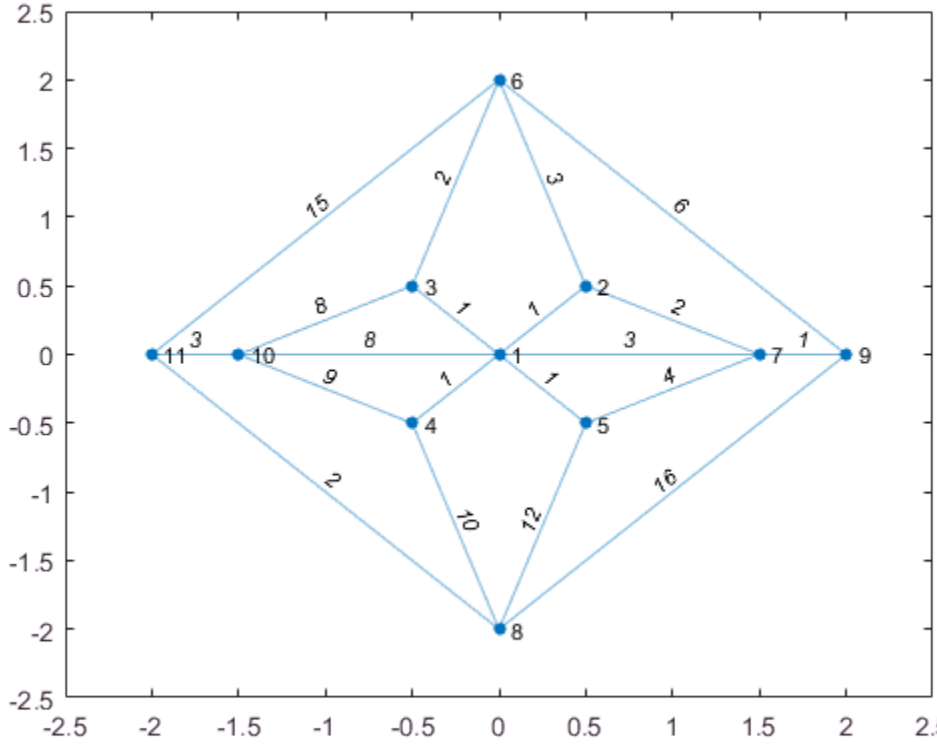

Find the shortest path between nodes 6 and 8 based on the graph edge weights. Highlight this path in green.

```
[path1,d] = shortestpath(G,6,8)
```

```
path1 =

     6     3     1     4     8


d = 14
```

```
highlight(p,path1,'EdgeColor','g')
```

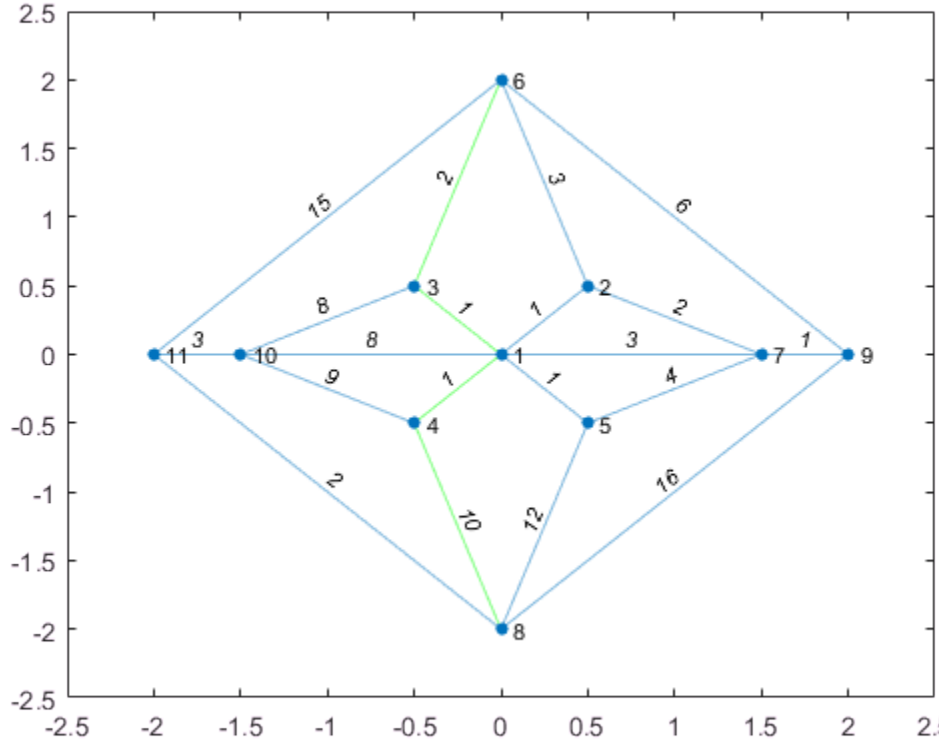

Specify `Method` as `unweighted` to ignore the edge weights, instead treating all edges as if they had a weight of 1. This method produces a different path between the nodes, one that previously had too large of a path length to be the shortest path. Highlight this path in red.

```
[path2,d] = shortestpath(G,6,8,'Method','unweighted')
```

```
path2 =

     6     9     8


d = 2
```

```
highlight(p,path2,'EdgeColor','r')
```

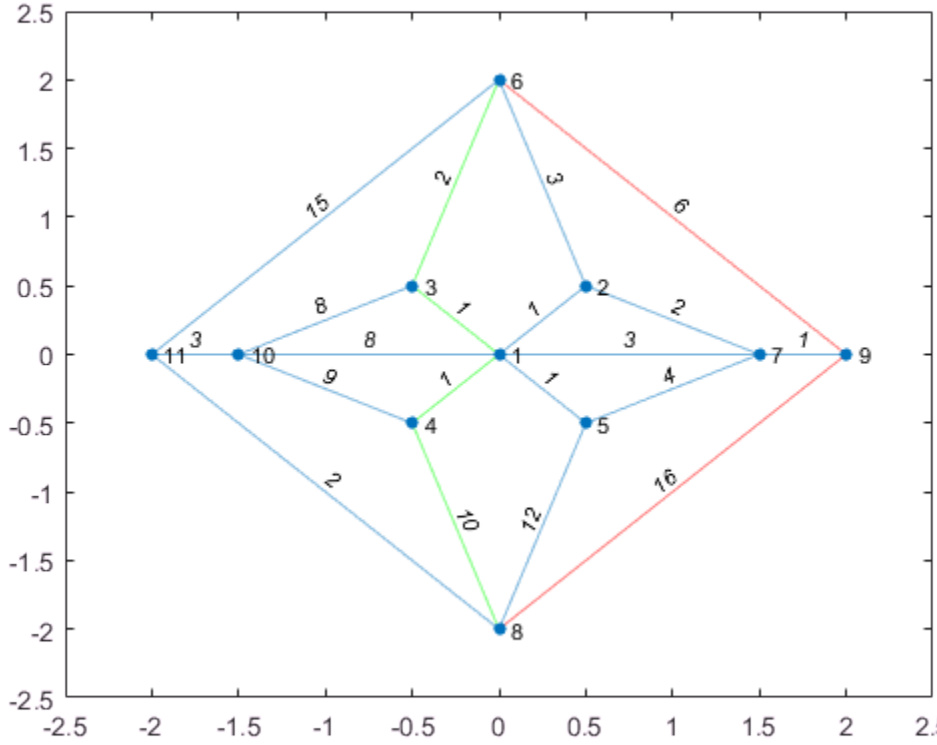

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: `G = digraph([1 2],[2 3])`

s — Source node ID
numeric node index | node name

Source node ID, specified as either a numeric node index or a node name.

Example: `shortestpath(G,2,5)` computes the shortest path between node 2 and node 5.

Example: `shortestpath(G,'node1','node2')` computes the shortest path between the named nodes `node1` and `node2`.

t — Target node ID
numeric node index | node name

Target node ID, specified as either a numeric node index or a node name.

Example: `shortestpath(G,2,5)` computes the shortest path between node 2 and node 5.

Example: `shortestpath(G,'node1','node2')` computes the shortest path between the named nodes `node1` and `node2`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `P = shortestpath(G,s,t,'Method','acyclic')`

`'Method'` — Shortest path algorithm
`'auto'` (default) | `'unweighted'` | `'positive'` | `'mixed'` | `'acyclic'`

Shortest path algorithm, specified as the comma-separated pair consisting of `'Method'` and one of the options in the table.

Option	Description
`'auto'` (default)	The `'auto'` option automatically selects the algorithm:

Option	Description
	• `'unweighted'` is used for `graph` and `digraph` inputs with no edge weights. • `'positive'` is used for all `graph` inputs that have edge weights, and requires the weights to be nonnegative. This option is also used for `digraph` inputs with nonnegative edge weights. • `'mixed'` is used for `digraph` inputs whose edge weights contain some negative values. The graph cannot have negative cycles.
`'unweighted'`	Breadth-First computation that treats all edge weights as `1`.
`'positive'`	Dijkstra algorithm that requires all edge weights to be nonnegative.
`'mixed'` (only for `digraph`)	Bellman-Ford algorithm for directed graphs that requires the graph to have no negative cycles. While `'mixed'` is slower than `'positive'` for the same problem, `'mixed'` is more versatile as it allows some edge weights to be negative.
`'acyclic'` (only for `digraph`)	Algorithm designed to improve performance for directed, acyclic graphs (DAGs) with weighted edges. Use `isdag` to confirm if a directed graph is acyclic.

Note: For most graphs, `'unweighted'` is the fastest algorithm, followed by `'acyclic'`, `'positive'`, and `'mixed'`.

Example: `shortestpath(G,s,t,'Method','acyclic')`

Output Arguments

P — Shortest path between nodes

vector of node indices | cell array

Shortest path between nodes, returned as a vector of node indices if `s` and `t` are numeric, or as a cell array of node names if `s` and `t` are character vectors. `P` is empty, `{}`, if there is no path between the nodes.

If there are multiple shortest paths between `s` and `t`, then `P` contains only one of the paths. The path that is returned can change depending on which algorithm `Method` specifies.

d — Shortest path distance

scalar

Shortest path distance, returned as a numeric scalar. `d` is the summation of the edge weights between consecutive nodes in `P`. If there is no path between the nodes, then `d` is `Inf`.

Tips

- The `shortestpath`, `shortestpathtree`, and `distances` functions do not support undirected graphs with negative edge weights, or more generally any graph containing a negative cycle, for these reasons:
  - A *negative cycle* is a path that leads from a node back to itself, with the sum of the edge weights on the path being negative. If a negative cycle is on a path between two nodes, then no shortest path exists between the nodes, since a shorter path can always be found by traversing the negative cycle.
  - A single negative edge weight in an undirected graph creates a negative cycle.

See Also

See Also

`digraph` | `distances` | `graph` | `nearest` | `shortestpathtree`

Introduced in R2015b

shortestpathtree

Shortest path tree from node

Syntax

```
TR = shortestpathtree(G,s)
TR = shortestpathtree(G,s,t)
TR = shortestpathtree( ___ ,Name,Value)
[TR,D] = shortestpathtree( ___ )
```

Description

`TR = shortestpathtree(G,s)` returns a directed graph, `TR`, that contains the tree of shortest paths from source node `s` to all other nodes in the graph. If the graph is weighted (that is, `G.Edges` contains a variable `Weight`), then those weights are used as the distances along the edges in the graph. Otherwise, all edge distances are taken to be `1`.

`TR = shortestpathtree(G,s,t)` computes the tree of shortest paths between multiple source or target nodes:

- `s` can be a single source node, and `t` can specify multiple target nodes.
- `s` can specify several source nodes, and `t` can specify a single target node.

`TR = shortestpathtree( ___ ,Name,Value)` uses additional options specified by one or more Name-Value pair arguments, using any of the input argument combinations in previous syntaxes. For example, `shortestpathtree(G,s,'OutputForm','vector')` returns a numeric vector that describes the shortest path tree.

`[TR,D] = shortestpathtree( ___ )` additionally returns the shortest path distance between nodes in the tree.

Examples

Shortest Paths from Specified Source Node

Find the shortest paths from a source node to each of the other reachable nodes in a graph, and plot the results.

Create a directed graph.

```
s = [1 1 2 3 3 4 4 6 6 7 8 7 5];
t = [2 3 4 4 5 5 6 1 8 1 3 2 8];
G = digraph(s,t)
```

```
G = 
  digraph with properties:

    Edges: [13×1 table]
    Nodes: [8×0 table]
```

Calculate the shortest paths from node 1 to each of the other reachable nodes in the graph. Then, plot the resulting tree on top of the graph.

```
TR = shortestpathtree(G,1);
p = plot(G);
highlight(p,TR,'EdgeColor','r')
```

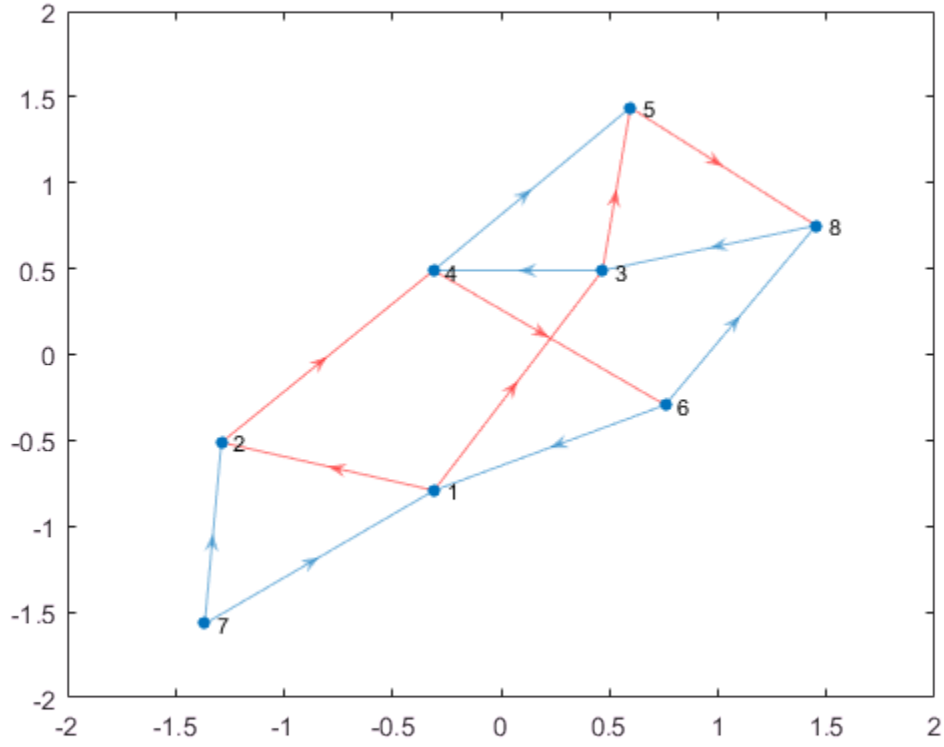

Since there is no path from node 1 to node 7, node 7 is disconnected from the tree.

Shortest Paths to Specified Target Node

Find the shortest paths from each node in a graph to a target node, and plot the results.

Create and plot a graph.

```
s = [1 1 1 1 1 1 1 2 2 7 7 7 7 9 9 3 3 1 6 4 8 10 6 8 4 5];
t = [2 3 4 5 6 8 7 6 7 5 6 8 9 6 8 6 10 10 10 10 10 11 11 11 8 8];
G = graph(s,t);
x = [0 0.5 -0.5 -0.5 0.5 0 1.5 0 2 -1.5 -2];
y = [0 0.5 0.5 -0.5 -0.5 2 0 -2 0 0 0];
```

```
plot(G,'XData',x,'YData',y)
```

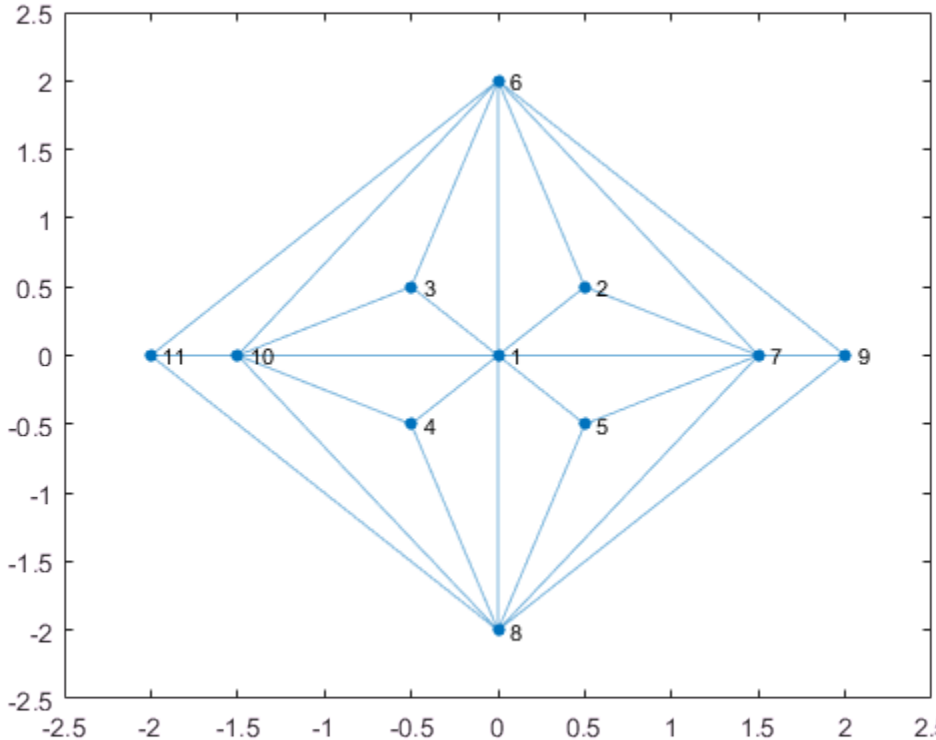

Find the shortest paths from each node in the graph to node 10. Plot the resulting tree.

```
TR = shortestpathtree(G,'all',10);
plot(TR)
```

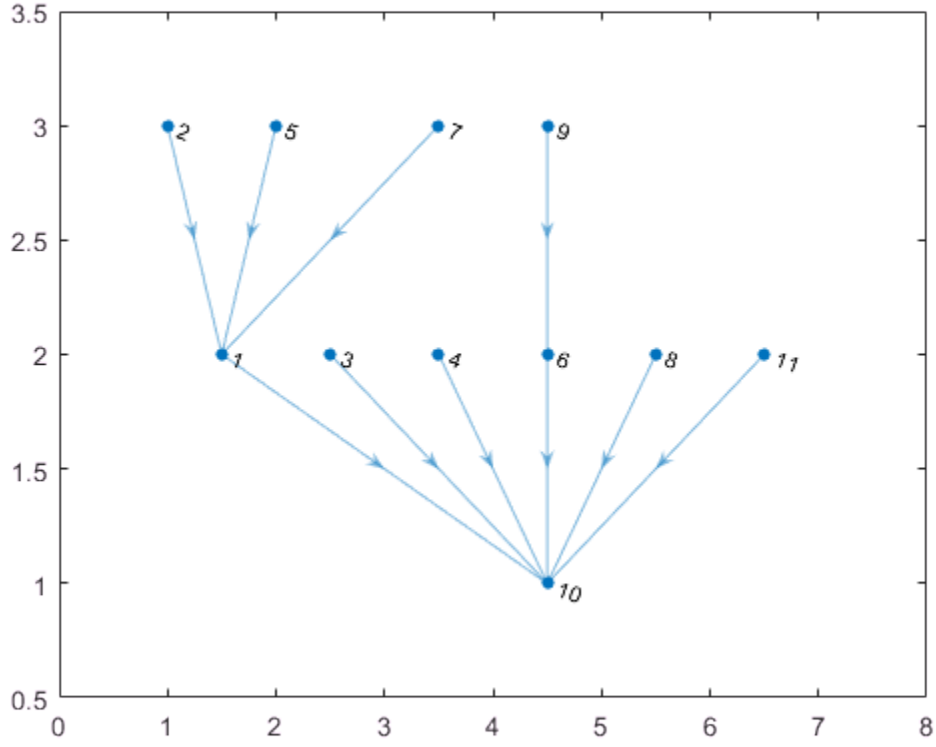

Subset of Shortest Paths with Specified Source Node

Find the shortest paths and path lengths from a single source node to several target nodes.

Create and plot a graph.

```
G = digraph(bucky);
plot(G)
```

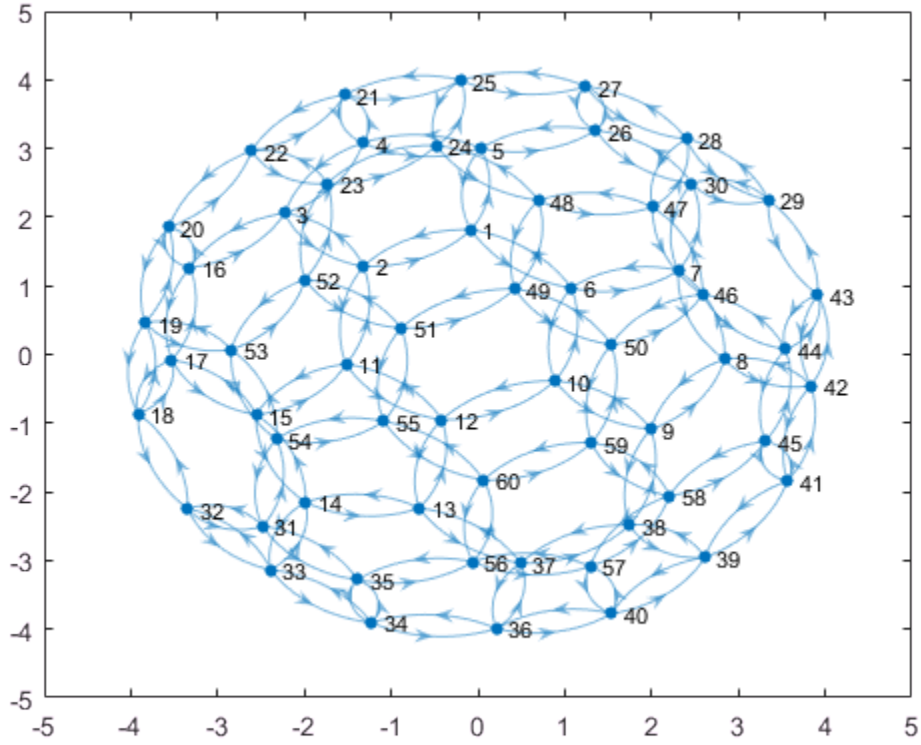

Find the shortest paths from node 23 to several other nodes. Specify `OutputForm` as `cell` to return the shortest paths in a cell array. Specify two outputs to also return the shortest path distances.

```
target = [1 5 13 32 44];
[TR,D] = shortestpathtree(G,23,target,'OutputForm','cell')
```

```
TR = 5×1 cell array
    [1×6 double]
    [1×5 double]
    [1×8 double]
    [1×6 double]
    [1×6 double]
```

```
D =

     5     4     7     5     5
```

`tree{j}` is the shortest path from node 23 to node `target(j)` with length `D(j)`.

Find the path and path length from node 21 to node 5.

```
path = TR{2}
```

```
path =

    23    22    21     4     5
```

```
path_length = D(2)
```

```
path_length = 4
```

Input Arguments

G — Input graph

`graph` object | `digraph` object

Input graph, specified as either a `graph` or `digraph` object. Use the `graph` function to create an undirected graph or the `digraph` function to create a directed graph.

For more information, see graph or digraph.

Example: `G = graph(1,2)`

Example: `G = digraph([1 2],[2 3])`

s — Source node(s)

scalar | vector | character vector | cell array of character vectors | `'all'`

Source node(s), specified as a single node with a scalar node index or character vector node name, as multiple nodes with a numeric vector or cell array of character vectors, or as all nodes in the graph with `'all'`.

- When used alone, `s` must specify a single source node.
- When used together with `t`, the `s` and `t` inputs must satisfy:

- `s` can be a single source node, and `t` can specify multiple target nodes.
- `s` can specify several source nodes, and `t` can specify a single target node.

Example: `shortestpathtree(G,'a')`

Example: `shortestpathtree(G,[1 2 3],8)`

`t` — Target node(s)
`'all'` (default) | scalar | vector | cell array of character vectors

Target node(s), specified as a single node with a scalar node index, as multiple nodes with a numeric vector or cell array of character vectors, or as all nodes in the graph with `'all'`.

The `s` and `t` inputs must satisfy:

- `s` can be a single source node, and `t` can specify multiple target nodes.
- `s` can specify several source nodes, and `t` can specify a single target node.

Example: `shortestpathtree(G,[1 2 3],8)`

Example: `shortestpathtree(G,{'a','b','c'},{'f'})`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `[TR,D] = shortestpathtree(G,s,t,'Method','unweighted','OutputForm','vector')`

`'OutputForm'` — Format of output
`'tree'` (default) | `'cell'` | `'vector'`

Format of output, specified as the comma-separated pair consisting of `'OutputForm'` and one of the options in the table.

Option	Description
`'tree'` (default)	`TR` is a directed graph representing the shortest path tree.

Option	Description
`'cell'`	`TR` is a cell array, and `TR{k}` contains the path from `s` to `t(k)` or from `s(k)` to `t`. If there is no path between the nodes, then `TR{k}` is empty. If `s` and `t` are node names, then `TR{k}` is a cell array of character vectors. Otherwise, `TR{k}` is a numeric vector.
`'vector'`	`TR` is a vector that describes the tree: • If `s` contains a single source node, then `TR(k)` is the ID of the node that precedes node `k` on the path from `s` to `k`. By convention, `TR(s) = 0`. • If `s` contains multiple source nodes, then `TR(k)` is the ID of the node that succeeds node `k` on the path from `k` to `t`. By convention, `TR(t) = 0`. In each case `TR(k)` is `NaN` if node `k` is not part of the tree.

Example: `shortestpathtree(G,s,'OutputForm','vector')`

`'Method'` — Shortest path algorithm
`'auto'` (default) | `'unweighted'` | `'positive'` | `'mixed'` | `'acyclic'`

Shortest path algorithm, specified as the comma-separated pair consisting of `'Method'` and one of the options in the table.

Option	Description
`'auto'` (default)	The `'auto'` option automatically selects the algorithm: • `'unweighted'` is used for `graph` and `digraph` inputs with no edge weights. • `'positive'` is used for all `graph` inputs that have edge weights, and requires the weights to be nonnegative.

Option	Description
	This option is also used for `digraph` inputs with nonnegative edge weights. • `'mixed'` is used for `digraph` inputs whose edge weights contain some negative values. The graph cannot have negative cycles.
`'unweighted'`	Breadth-First computation that treats all edge weights as `1`.
`'positive'`	Dijkstra algorithm that requires all edge weights to be nonnegative.
`'mixed'` (only for `digraph`)	Bellman-Ford algorithm for directed graphs that requires the graph to have no negative cycles. While `'mixed'` is slower than `'positive'` for the same problem, `'mixed'` is more versatile as it allows some edge weights to be negative.
`'acyclic'` (only for `digraph`)	Algorithm designed to improve performance for directed, acyclic graphs (DAGs) with weighted edges. Use `isdag` to confirm if a directed graph is acyclic.

Note: For most graphs, `'unweighted'` is the fastest algorithm, followed by `'acyclic'`, `'positive'`, and `'mixed'`.

Example: `shortestpath(G,s,t,'Method','acyclic')`

Output Arguments

TR — Shortest path tree
`digraph` object

Shortest path tree, returned as a `digraph` object. Use the `highlight` function to visualize the shortest path tree on top of a plot of the graph, or use `plot(TR)` to visualize the shortest path tree on its own.

If there are multiple shortest paths between two nodes, then `TR` contains only one of the paths. The path that is returned can change depending on which algorithm is specified by `Method`. The `TR` output is a graph with zero edges if there are no paths connecting any of the specified nodes.

`D` — Distance between source and target nodes
vector

Distance between source and target nodes, returned as a vector. A value of `Inf` indicates there is no path between two nodes.

Tips

- The `shortestpath`, `shortestpathtree`, and `distances` functions do not support undirected graphs with negative edge weights, or more generally any graph containing a negative cycle, for these reasons:
  - A *negative cycle* is a path that leads from a node back to itself, with the sum of the edge weights on the path being negative. If a negative cycle is on a path between two nodes, then no shortest path exists between the nodes, since a shorter path can always be found by traversing the negative cycle.
  - A single negative edge weight in an undirected graph creates a negative cycle.

See Also

See Also

`digraph` | `distances` | `graph` | `nearest` | `shortestpath`

Introduced in R2015b

subgraph

Extract subgraph

Syntax

```
H = subgraph(G,nodeIDs)
```

Description

`H = subgraph(G,nodeIDs)` returns a subgraph of `G` that contains only the nodes specified by `nodeIDs`.

Examples

Extract Subgraph

Create and plot a graph.

```
s = [1 1 1 1 2 2 2 2 2 2 2 2 2 2 15 15 15 15 15];
t = [3 5 4 2 14 6 11 12 13 10 7 9 8 15 16 17 19 18 20];
G = graph(s,t);
plot(G,'Layout','force')
```

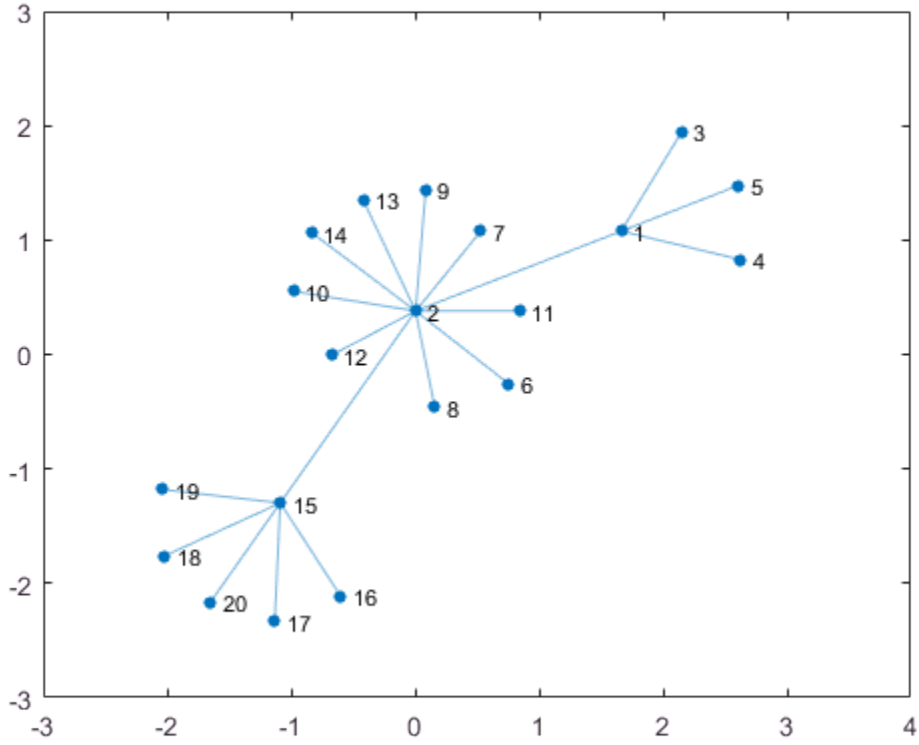

Extract a subgraph from G by specifying which nodes to include. The node numbering in the subgraph is reset.

```
idx = [2 15 16 17 18 19 20 1 3 4 5];
H = subgraph(G,idx);
plot(H,'Layout','force')
```

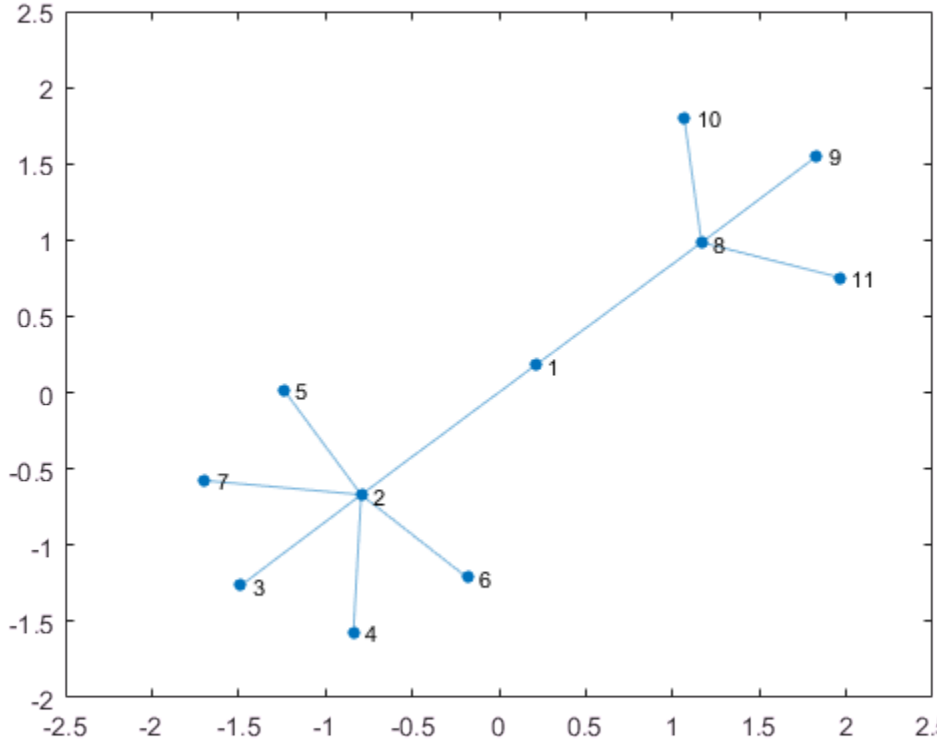

Subgraph with Node and Edge Properties

Create and plot a weighted graph with named nodes.

```
s = [1 1 1 2 2 2 8 8 8 8];
t = [2 3 4 5 6 7 9 10 11 12];
weights = [10 30 40 80 60 60 20 30 90 80];
names = {'A' 'B' 'C' 'D' 'E' 'F' 'G' 'H' 'I' 'J' 'K' 'L'};
G = graph(s,t,weights,names);
plot(G,'EdgeLabel',G.Edges.Weight)
```

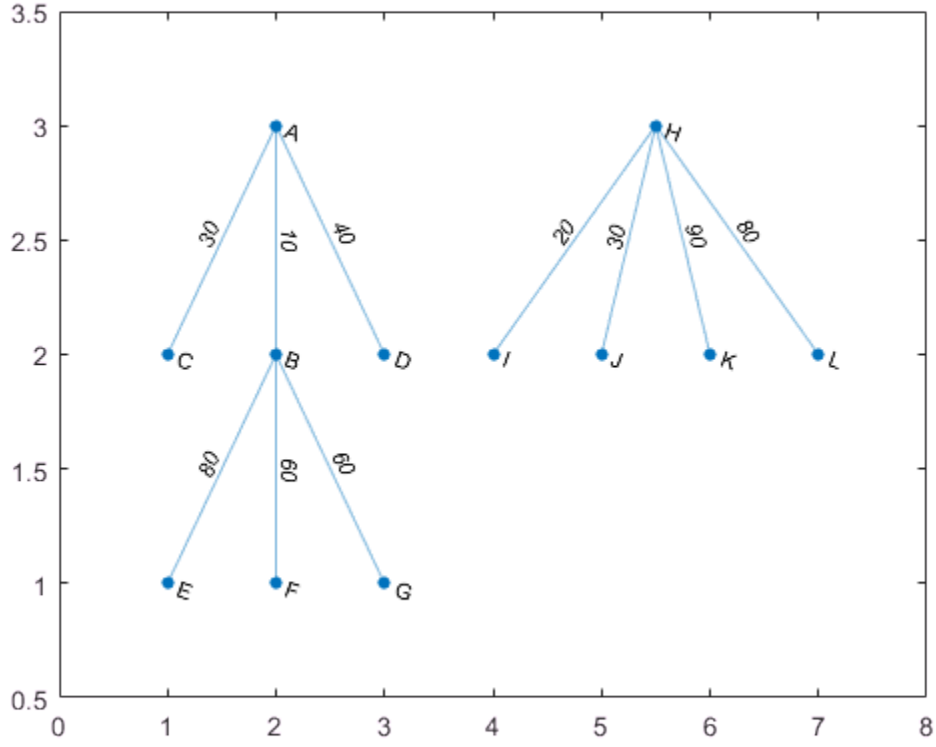

Extract a subgraph that contains node `'B'` and all of its neighbors. `subgraph` preserves the node names and edge weights. However, the numeric node IDs in `H` are renumbered compared to `G`.

```
N = neighbors(G,'B');
H = subgraph(G, ['B'; N]);
plot(H,'EdgeLabel',H.Edges.Weight)
```

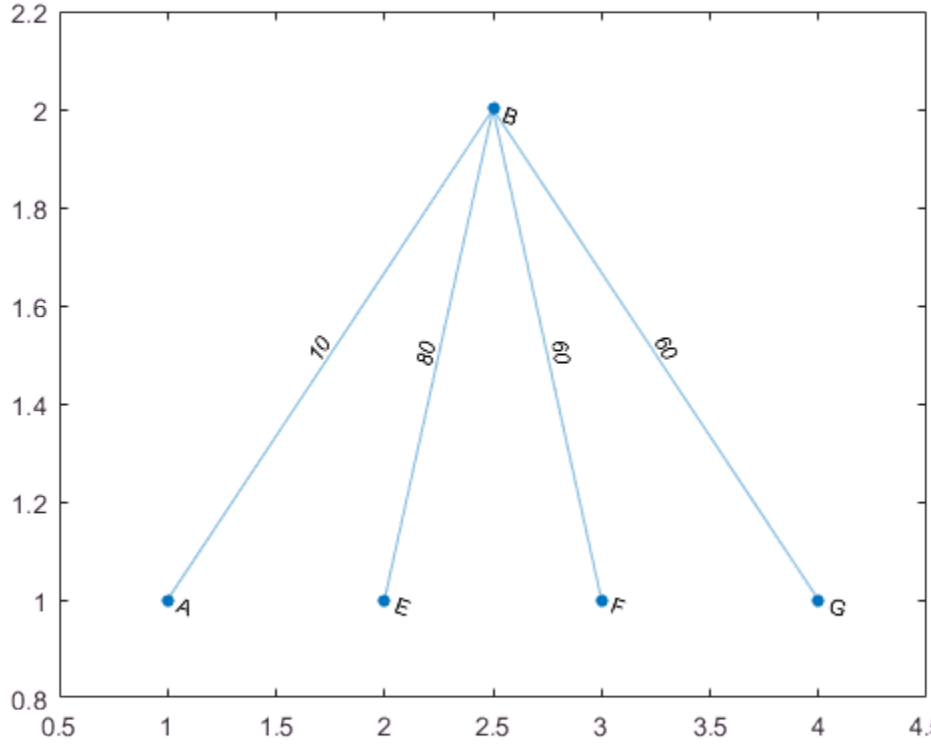

Input Arguments

G — Input graph

graph object | digraph object

Input graph, specified as either a graph or digraph object. Use the graph function to create an undirected graph or the digraph function to create a directed graph.

For more information, see graph or digraph.

Example: G = graph(1,2)

Example: `G = digraph([1 2],[2 3])`

`nodeIDs` — Node IDs
vector of indices | cell array of node names

Node IDs, specified as a vector of indices, or cell array of node names. `nodeIDs` selects a subset of the nodes in `G` to generate the subgraph, `H`.

Example: `H = subgraph(G,[1 2 5])`

Example: `H = subgraph(G,{'A' 'B' 'E'})`

Output Arguments

`H` — Subgraph
`graph` object | `digraph` object

Subgraph, returned as a `graph` or `digraph` object. `H` contains only the nodes that were selected with `nodeIDs`. Other nodes in `G` (and the edges connecting to those nodes) are discarded. The node properties and edge properties of the nodes and edges referred to by `nodeIDs` are carried over from `G` into `H`.

See graph or digraph for more information about graph objects.

See Also

See Also
`digraph` | `graph` | `reordernodes`

Topics
"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"

Introduced in R2015b

graph

Create undirected graph

Syntax

```
G = graph
```

```
G = graph(A)
G = graph(A,nodenames)
G = graph(A,___,type)
G = graph(A,___,'OmitSelfLoops')
```

```
G = graph(s,t)
G = graph(s,t,weights)
G = graph(s,t,weights,nodenames)
G = graph(s,t,weights,num)
G = graph(s,t,___,'OmitSelfLoops')
```

```
G = graph(EdgeTable)
G = graph(EdgeTable,NodeTable)
G = graph(EdgeTable,___,'OmitSelfLoops')
```

Description

`G = graph` creates an empty undirected graph object, `G`, which has no nodes or edges.

`G = graph(A)` creates a weighted graph using a square, symmetric adjacency matrix, `A`. The location of each nonzero entry in `A` specifies an edge for the graph, and the weight of the edge is equal to the value of the entry. For example, if `A(2,1) = 10`, then `G` contains an edge between node 2 and node 1 with a weight of 10.

`G = graph(A,nodenames)` additionally specifies node names using the cell array of character vectors, `nodenames`. The number of elements in `nodenames` must be equal to `size(A,1)`.

`G = graph(A,___,type)` specifies a triangle of the adjacency matrix to use in constructing the graph. You must specify `A` and optionally can specify `nodenames`. To use

only the upper or lower triangle of `A` to construct the graph, `type` can be either `'upper'` or `'lower'`.

`G = graph(A, ___ ,'OmitSelfLoops')` ignores the diagonal elements of `A` and returns a graph without any self-loops. You can use any of the input arguments in previous syntaxes.

`G = graph(s,t)` specifies graph edges `(s,t)` in node pairs. `s` and `t` can be numeric, character vectors, or cell arrays of character vectors with the same number of elements.

`G = graph(s,t,weights)` also specifies edge weights with the array, `weights`.

`G = graph(s,t,weights,nodenames)` additionally specifies all node names using the cell array of character vectors, `nodenames`. The `s` and `t` inputs cannot contain node names that are not in `nodenames`.

`G = graph(s,t,weights,num)` specifies the number of nodes in the graph with the numeric scalar `num`.

`G = graph(s,t, ___ ,'OmitSelfLoops')` does not add any self-loops to the graph. That is, any `k` that satisfies `s(k) == t(k)` is ignored. You must specify `s` and `t` and optionally can specify `weights`, `nodenames`, or `num`.

`G = graph(EdgeTable)` uses the table, `EdgeTable`, to define the graph. The first variable in `EdgeTable` must be `EndNodes`, and it must be a two-column array defining the edge list of the graph. `EdgeTable` can contain any number of other table variables to define attributes of the graph edges.

`G = graph(EdgeTable,NodeTable)` additionally uses the table, `NodeTable`, to define attributes of the graph nodes. `NodeTable` can contain any number of table variables to define attributes of the graph nodes.

`G = graph(EdgeTable, ___ ,'OmitSelfLoops')` does not add self-loops to the graph. That is, any `k` that satisfies `EdgeTable.EndNodes(k,1) == EdgeTable.EndNodes(k,2)` is ignored. You must specify `EdgeTable` and optionally can specify `NodeTable`.

Examples

Adjacency Matrix Graph Construction

Create a symmetric adjacency matrix, A, that creates a complete graph of order 4. Use a logical adjacency matrix to create a graph without weights.

```
A = ones(4) - diag([1 1 1 1])
```

```
A =

     0     1     1     1
     1     0     1     1
     1     1     0     1
     1     1     1     0
```

```
G = graph(A~=0)
```

```
G = 
  graph with properties:

    Edges: [6×1 table]
    Nodes: [4×0 table]
```

View the edge list of the graph.

```
G.Edges
```

```
ans = 6×1 table
    EndNodes
    ________

    1    2
    1    3
    1    4
    2    3
    2    4
    3    4
```

Adjacency Matrix Construction with Node Names

Create an upper triangular adjacency matrix.

```
A = triu(magic(4))
```

```
A =

    16     2     3    13
     0    11    10     8
     0     0     6    12
     0     0     0     1
```

Create a graph with named nodes using the adjacency matrix. Specify `'OmitSelfLoops'` to ignore the entries on the diagonal of `A`, and specify `type` as `'upper'` to indicate that `A` is upper-triangular.

```
names = {'alpha' 'beta' 'gamma' 'delta'};
G = graph(A,names,'upper','OmitSelfLoops')
```

```
G =
  graph with properties:

    Edges: [6×2 table]
    Nodes: [4×1 table]
```

View the edge and node information.

```
G.Edges
```

```
ans = 6×2 table
         EndNodes          Weight
    ________________       ______

    'alpha'    'beta'        2
    'alpha'    'gamma'       3
    'alpha'    'delta'      13
    'beta'     'gamma'      10
    'beta'     'delta'       8
    'gamma'    'delta'      12
```

```
G.Nodes
```

```
ans = 4×1 table
     Name
```

```
    _______

    'alpha'
    'beta'
    'gamma'
    'delta'
```

Edge List Graph Construction

Create and plot a cube graph using a list of the end nodes of each edge.

```
s = [1 1 1 2 2 3 3 4 5 5 6 7];
t = [2 4 8 3 7 4 6 5 6 8 7 8];
G = graph(s,t)
```

```
G = 
  graph with properties:

    Edges: [12×1 table]
    Nodes: [8×0 table]
```

```
plot(G)
```

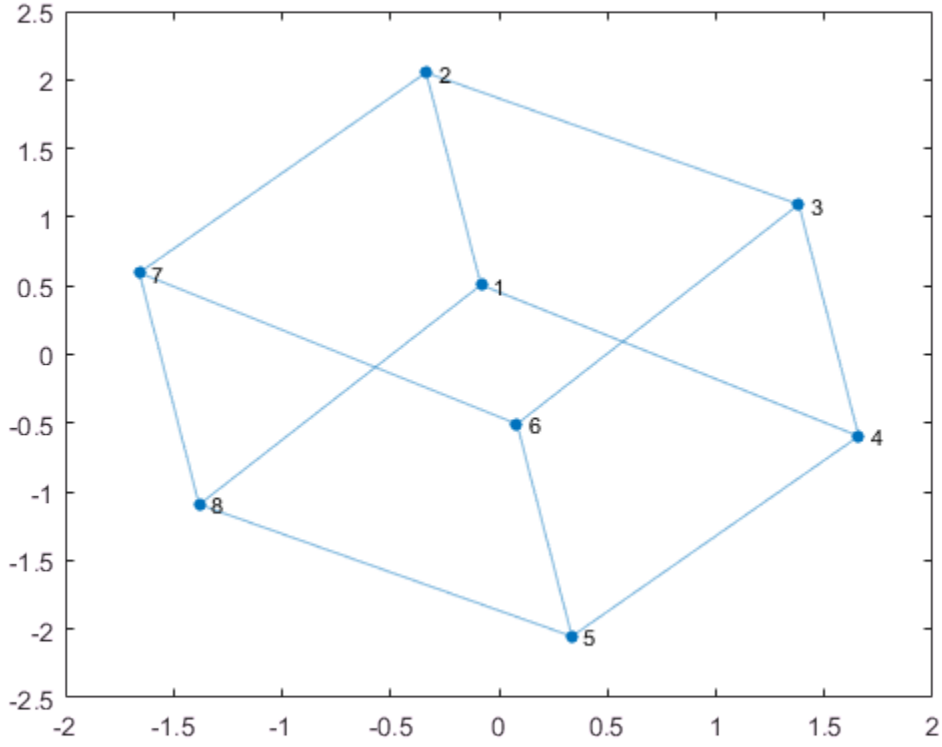

Edge List Graph Construction with Node Names and Edge Weights

Create and plot a cube graph using a list of the end nodes of each edge. Specify node names and edge weights as separate inputs.

```
s = [1 1 1 2 2 3 3 4 5 5 6 7];
t = [2 4 8 3 7 4 6 5 6 8 7 8];
weights = [10 10 1 10 1 10 1 1 12 12 12 12];
names = {'A' 'B' 'C' 'D' 'E' 'F' 'G' 'H'};
G = graph(s,t,weights,names)
```

```
G =
  graph with properties:
```

```
    Edges: [12×2 table]
    Nodes: [8×1 table]
```

```
plot(G,'EdgeLabel',G.Edges.Weight)
```

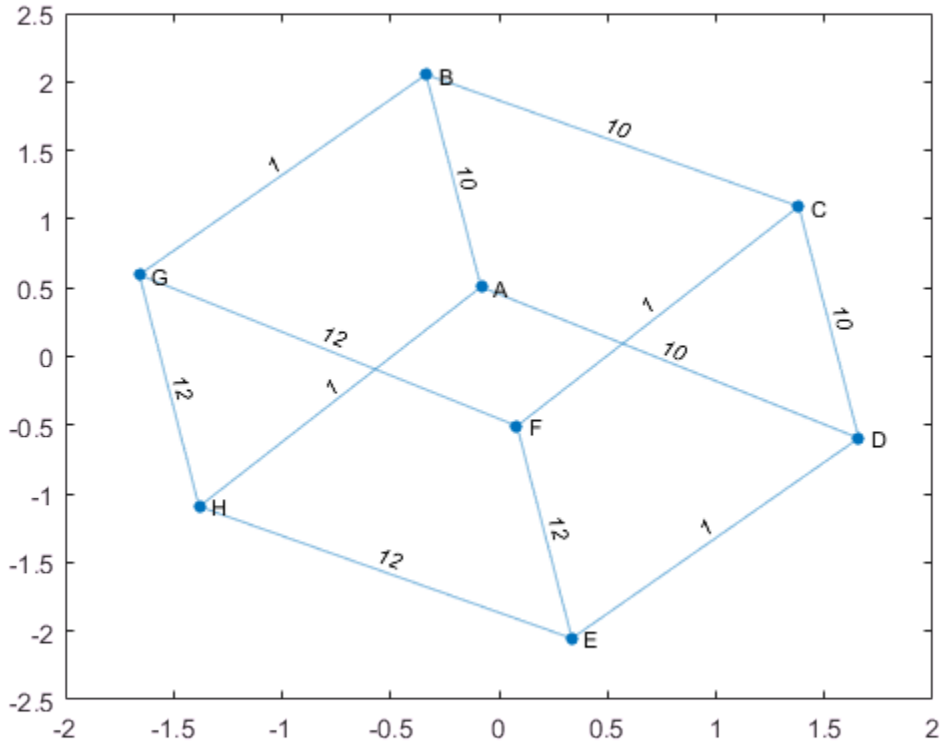

Edge List Construction with Extra Nodes

Create a weighted graph using a list of the end nodes of each edge. Specify that the graph should contain a total of 10 nodes.

```
s = [1 1 1 1 1];
```

```
t = [2 3 4 5 6];
weights = [5 5 5 6 9];
G = graph(s,t,weights,10)
```

```
G =
  graph with properties:

    Edges: [5×2 table]
    Nodes: [10×0 table]
```

Plot the graph. The extra nodes are disconnected from the primary connected component.

```
plot(G)
```

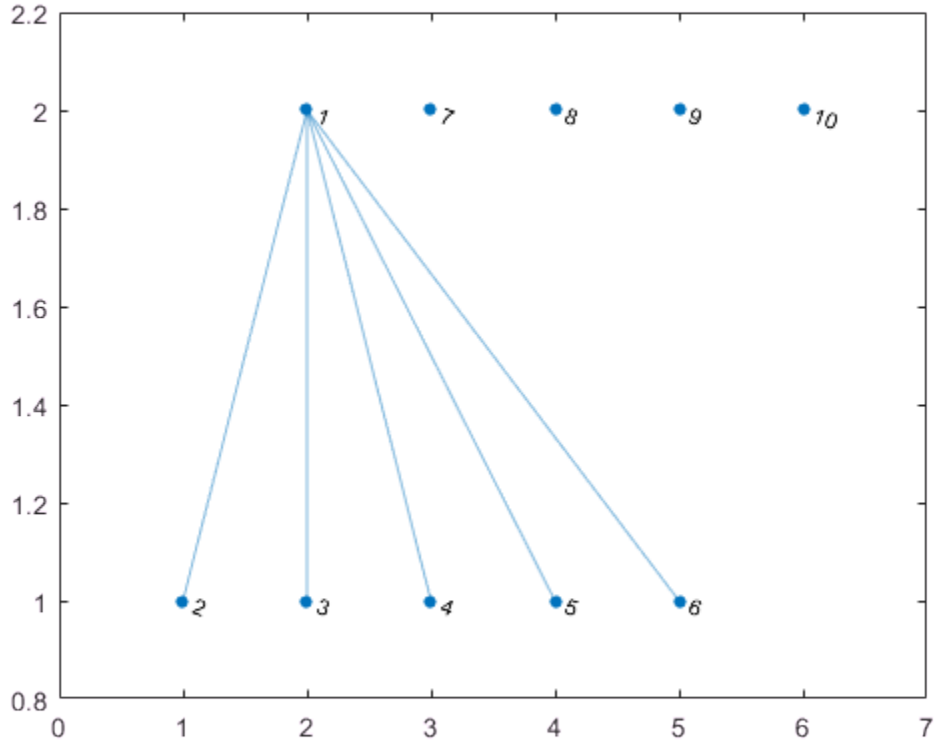

Add Nodes and Edges to Empty Graph

Create an empty graph object, `G`.

```
G = graph;
```

Add three nodes and three edges to the graph. The corresponding entries in `s` and `t` define the end nodes of the graph edges. `addedge` automatically adds the appropriate nodes to the graph if they are not already present.

```
s = [1 2 1];
t = [2 3 3];
G = addedge(G,s,t)
```

```
G = 
  graph with properties:

    Edges: [3×1 table]
    Nodes: [3×0 table]
```

View the edge list. Each row describes an edge in the graph.

```
G.Edges
```

```
ans = 3×1 table
    EndNodes
    ________

    1    2
    1    3
    2    3
```

For the best performance, construct graphs all at once using a single call to `graph`. Adding nodes or edges in a loop can be slow for large graphs.

Graph Construction with Tables

Create an edge table that contains the variables `EndNodes`, `Weight`, and `Code`. Then create a node table that contains the variables `Name` and `Country`. The variables in each table specify properties of the graph nodes and edges.

```
s = [1 1 1 2 3];
t = [2 3 4 3 4];
weights = [6 6.5 7 11.5 17]';
code = {'1/44' '1/49' '1/33' '44/49' '49/33'}';
EdgeTable = table([s' t'],weights,code, ...
    'VariableNames',{'EndNodes' 'Weight' 'Code'})
```

```
EdgeTable = 5×3 table
    EndNodes    Weight     Code
    ________    ______    _______

    1    2         6      '1/44'
    1    3       6.5      '1/49'
    1    4         7      '1/33'
    2    3      11.5      '44/49'
    3    4        17      '49/33'
```

```
names = {'USA' 'GBR' 'DEU' 'FRA'}';
country_code = {'1' '44' '49' '33'}';
NodeTable = table(names,country_code,'VariableNames',{'Name' 'Country'})
```

```
NodeTable = 4×2 table
    Name     Country
    _____    _______

    'USA'    '1'
    'GBR'    '44'
    'DEU'    '49'
    'FRA'    '33'
```

Create a graph using the node and edge tables. Plot the graph using the country codes as node and edge labels.

```
G = graph(EdgeTable,NodeTable);
plot(G,'NodeLabel',G.Nodes.Country,'EdgeLabel',G.Edges.Code)
```

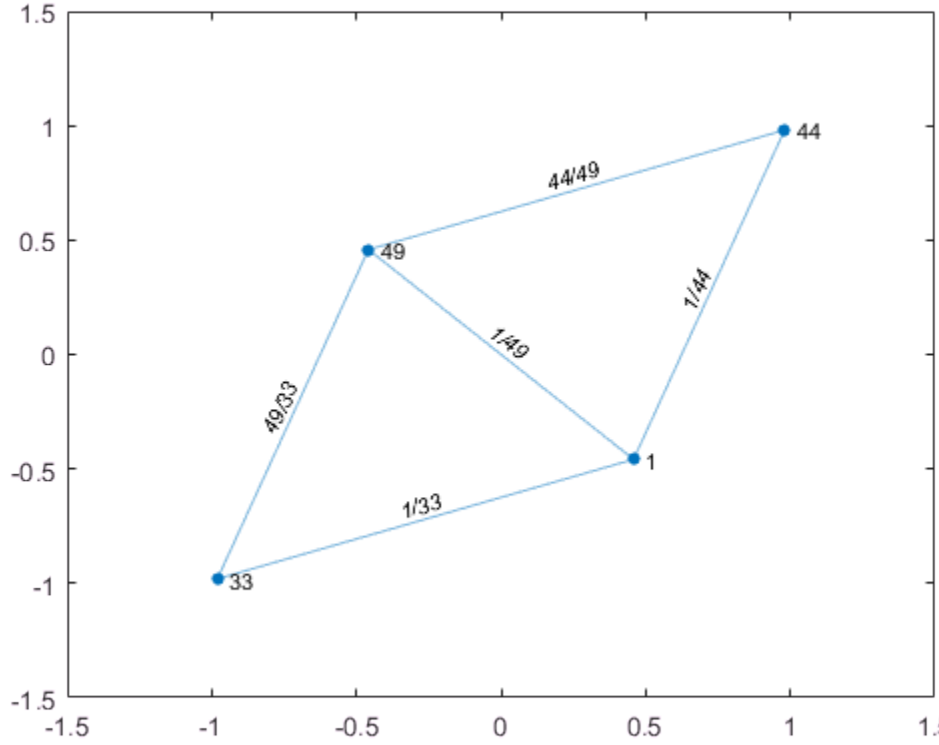

- "Build Watts-Strogatz Small World Graph Model"
- "Use PageRank Algorithm to Rank Websites"

Input Arguments

A — Adjacency matrix

matrix

Adjacency matrix, specified as a full or sparse, numeric matrix. The entries in A specify the network of connections (edges) between the nodes of the graph. The location of each

nonzero entry in A specifies an edge between two nodes. The value of that entry provides the edge weight. A logical adjacency matrix results in an unweighted graph.

Nonzero entries on the main diagonal of A specify *self-loops*, or nodes that are connected to themselves with an edge. Use the `'OmitSelfLoops'` input option to ignore diagonal entries.

A must be symmetric unless the `type` input is specified. Use `issymmetric` to confirm matrix symmetry. For triangular adjacency matrices, specify `type` to use only the upper or lower triangle.

Example: `A = [0 1 5; 1 0 0; 5 0 0]` describes a graph with three nodes and two edges. The edge between node 1 and node 2 has a weight of 1, and the edge between node 1 and node 3 has a weight of 5.

Data Types: `single` | `double` | `logical`

`nodenames` — Node names

cell array of character vectors

Node names, specified as a cell array of character vectors. `nodenames` must contain a nonempty, unique name for each node in the graph (its length must be equal to `numnodes(G)`).

Example: `G = graph(A,{'n1','n2','n3'})` specifies three node names for a 3-by-3 adjacency matrix, A.

Data Types: `cell`

`type` — Type of adjacency matrix

`'upper'` | `'lower'`

Type of adjacency matrix, specified as either `'upper'` or `'lower'`.

Example: `G = graph(A,'upper')` uses only the upper triangle of A to construct the graph, G.

`s,t` — Node pairs

scalars | vectors | matrices | multidimensional arrays | character vectors | cell arrays of character vectors

Node pairs, specified as scalars, vectors, matrices, multidimensional arrays, character vectors, or cell arrays of character vectors. `graph` creates edges between the corresponding nodes in `s` and `t`, which must both be numeric, or both be character

vectors or cell arrays of character vectors. In each case, `s` and `t` must have the same number of elements.

- If `s` and `t` are numeric, then they correspond to indices of graph nodes. Numeric node indices must be positive integers greater than or equal to 1.
- If `s` and `t` are character vectors or cell arrays of character vectors, then they specify names for the nodes. The `Nodes` property of the graph is a table containing a `Name` variable with the node names, `G.Nodes.Name`.
- `s` and `t` cannot specify duplicate edges. For undirected graphs, `graph([1 2],[2 1])` and `graph([1 1],[2 2])` both specify a duplicate edge between node 1 and node 2.

Example: `G = graph([1 2 3],[2 4 5])` creates a graph with five nodes and three edges.

Example: `G = graph({'Boston' 'New York' 'Washington D.C.'},{'New York' 'New Jersey' 'Pittsburgh'})` creates a graph with five named nodes and three edges.

`weights` — Edge weights

scalar | vector | matrix | multidimensional array

Edge weights, specified as a scalar, vector, matrix, or multidimensional array. `weights` can be a scalar or an array with the same number of elements as `s` and `t`.

`graph` stores the edge weights as a `Weight` variable in the `G.Edges` property table. To add or change weights after creating a graph, you can modify the table variable directly, for example, `G.Edges.Weight = [25 50 75]'`.

Example: `G = graph([1 2],[2 3],[100 200])` creates a graph with three nodes and two edges. The edges have weights of 100 and 200.

Data Types: `single` | `double`

`num` — Number of graph nodes

positive scalar integer

Number of graph nodes, specified as a positive scalar integer. `num` must be greater than or equal to the largest elements in `s` and `t`.

Example: `G = graph([1 2],[2 3],[],5)` creates a graph with three connected nodes and two isolated nodes.

`EdgeTable` — Table of edge information

table

Table of edge information. The first variable in `EdgeTable` is required to be a two-column matrix called `EndNodes`, but you can have any number of other variables to describe attributes of the graph edges. For edge weights, use the variable `Weight`, since this table variable name is used by some graph functions. If there is a variable `Weight`, then it must be a numeric column vector. See `table` for more information on constructing a table.

After creating a graph, query the edge information table using `G.Edges`.

Example: `EdgeTable = table([1 2; 2 3; 3 5; 4 5],'VariableNames', {'EndNodes'})`

Data Types: `table`

`NodeTable` — Table of node information

table

Table of node information. `NodeTable` can contain any number of variables to describe attributes of the graph nodes. For node names, use the variable `Name`, since this variable name is used by some graph functions. If there is a variable `Name`, then it must be a column cell array of nonempty, unique character vectors. See `table` for more information on constructing a table.

After the graph is created, query the node information table using `G.Nodes`.

Example: `NodeTable = table({'a'; 'b'; 'c'; 'd'},'VariableNames', {'Name'})`

Data Types: `table`

Output Arguments

`G` — Undirected graph

`graph` object

Undirected graph, returned as a `graph` object. For more information, see graph.

See Also

See Also

`digraph`

Topics

"Build Watts-Strogatz Small World Graph Model"
"Use PageRank Algorithm to Rank Websites"
graph
digraph
"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"
"Graph Plotting and Customization"

Introduced in R2015b

graph

Graph with undirected edges

Description

`graph` objects represent undirected graphs, which have direction-less edges connecting the nodes. After you create a graph object, you can learn more about the graph by using object functions to perform queries against the object. For example, you can add or remove nodes or edges, determine the shortest path between two nodes, or locate a specific node or edge.

```
G = graph([1 1], [2 3]);
e = G.Edges
G = addedge(G,2,3)
G = addnode(G,4)
plot(G)
```

Create Object

Use the `graph` function to create an undirected graph object.

For directed graphs, use the `digraph` function.

Properties

`Edges` — Edges of graph

table

Edges of graph, returned as a table. By default this is an `M`-by-`1` table, where `M` is the number of edges in the graph.

- To add new edge properties to the graph, create a new variable in the `Edges` table.
- To add or remove edges from the graph, use the `addedge` or `rmedge` object functions.

Example: `G.Edges` returns a table listing the edges in the graph

Example: `G.Edges.Weight` returns a numeric vector of the edge weights.

Example: `G.Edges.Weight = [10 20 30 55]'` specifies new edge weights for the graph.

Example: `G.Edges.NormWeight = G.Edges.Weight/sum(G.Edges.Weight)` adds a new edge property to the table containing the normalized weights of the edges.

Data Types: `table`

`Nodes` — Nodes of graph

table

Nodes of graph, returned as a table. By default this is an empty `N`-by-`0` table, where `N` is the number of nodes in the graph.

- To add new node properties to the graph, create a new variable in the `Nodes` table.
- To add or remove nodes from the graph, use the `addnode` or `rmnode` object functions.

Example: `G.Nodes` returns a table listing the node properties of the graph. This table is empty by default.

Example: `G.Nodes.Names = {'Montana', 'New York', 'Washington', 'California'}'` adds node names to the graph by adding the variable `Names` to the `Nodes` table.

Example: `G.Nodes.WiFi = logical([1 0 0 1 1]')` adds the variable `WiFi` to the `Nodes` table. This property specifies that certain airports have wireless internet coverage.

Data Types: `table`

Object Functions

Access and Modify Nodes and Edges

addedge	Add new edge to graph
rmedge	Remove edge from graph
addnode	Add new node to graph
rmnode	Remove node from graph
findedge	Locate edge in graph
findnode	Locate node in graph
numedges	Number of edges in graph
numnodes	Number of nodes in graph
reordernodes	Reorder graph nodes

subgraph	Extract subgraph
Search and Structure	
bfsearch	Breadth-first graph search
dfsearch	Depth-first graph search
centrality	Measure node importance
conncomp	Connected graph components
biconncomp	Biconnected graph components
bctree	Block-cut tree graph
maxflow	Maximum flow in graph
minspantree	Minimum spanning tree of graph
isisomorphic	Determine whether two graphs are isomorphic
isomorphism	Compute equivalence relation between two graphs
Shortest Path	
shortestpath	Shortest path between two single nodes
shortestpathtree	Shortest path tree from node
distances	Shortest path distances of all node pairs
Matrix Representation	
adjacency	Graph adjacency matrix
incidence	Graph incidence matrix
laplacian	Graph Laplacian matrix
Node Information	
degree	Degree of graph nodes
neighbors	Neighbors of graph node
nearest	Nearest neighbors within radius
Visualization	
plot	Graph plot

Examples

Create and Modify Graph Object

Create a `graph` object with three nodes and two edges. One edge is between node 1 and node 2, and the other edge is between node 1 and node 3.

```
G = graph([1 1],[2 3])
```

```
G 
  graph with properties:

    Edges: [2×1 table]
    Nodes: [3×0 table]
```

View the edge table of the graph.

```
G.Edges
```

```
ans = 2×1 table 
    EndNodes 
    ________ 

    1    2 
    1    3 
```

Add node names to the graph, and then view the new node and edge tables. The end nodes of each edge are now expressed using their node names.

```
G.Nodes.Name = {'A' 'B' 'C'}';
G.Nodes
```

```
ans = 3×1 table 
    Name 
    ____ 

    'A'  
    'B'  
    'C'  
```

```
G.Edges
```

```
ans = 2×1 table 
     EndNodes 
    __________ 

    'A'    'B'  
    'A'    'C'  
```

You can add or modify extra variables in the `Nodes` and `Edges` tables to describe attributes of the graph nodes or edges. However, you cannot directly change the number of nodes or edges in the graph by modifying these tables. Instead, use the `addedge`, `rmedge`, `addnode`, or `rmnode` functions to modify the number of nodes or edges in a graph.

For example, add an edge to the graph between nodes 2 and 3 and view the new edge list.

```
G = addedge(G,2,3)
```

```
G = 
  graph with properties:

    Edges: [3×1 table]
    Nodes: [3×1 table]
```

```
G.Edges
```

```
ans = 3×1 table
     EndNodes
    __________

    'A'    'B'
    'A'    'C'
    'B'    'C'
```

See Also

See Also

`digraph` | `graph`

Topics

digraph
"Directed and Undirected Graphs"
"Modify Nodes and Edges of Existing Graph"
"Add Graph Node Names, Edge Weights, and Other Attributes"
"Graph Plotting and Customization"

Introduced in R2015b

GraphPlot

Graph plot for directed and undirected graphs

Description

Graph plots are the primary way to visualize graphs and networks created using the `graph` and `digraph` functions. After you create a `GraphPlot` object, you can modify aspects of the plot by changing its property values. This is particularly useful for modifying the display of the graph nodes or edges.

Create Object

To create a `GraphPlot` object, specify an output argument with the `plot` function. For example:

```
G = graph([1 1 1 1 5 5 5 5],[2 3 4 5 6 7 8 9]);
h = plot(G)
```

Properties

GraphPlot Properties	Control graph plot appearance and behavior

Object Functions

layout	Change layout of graph plot
highlight	Highlight nodes and edges in plotted graph
labelnode	Label graph nodes
labeledge	Label graph edges

Examples

Adjust Properties of GraphPlot Object

Create a `GraphPlot` object, and then show how to adjust the properties of the object to affect the output display.

Create and plot a graph.

```
s = [1 1 1 1 1 1 1 9 9 9 9 9 9 9];
t = [2 3 4 5 6 7 8 2 3 4 5 6 7 8];
G = graph(s,t);
h = plot(G)
```

```
h = 
  GraphPlot with properties:

     NodeColor: [0 0.4470 0.7410]
    MarkerSize: 4
        Marker: 'o'
     EdgeColor: [0 0.4470 0.7410]
     LineWidth: 0.5000
     LineStyle: '-'
     NodeLabel: {'1'  '2'  '3'  '4'  '5'  '6'  '7'  '8'  '9'}
     EdgeLabel: {}
         XData: [-0.0814 0.9805 1.7163 -2.1332 -1.7454 0.0031 -0.9730 2.1481 0.0850]
         YData: [-0.2937 1.9640 -1.3569 0.5055 -1.3251 -2.1972 1.9659 0.4429 0.2946]
         ZData: [0 0 0 0 0 0 0 0 0]

  Show all properties
```

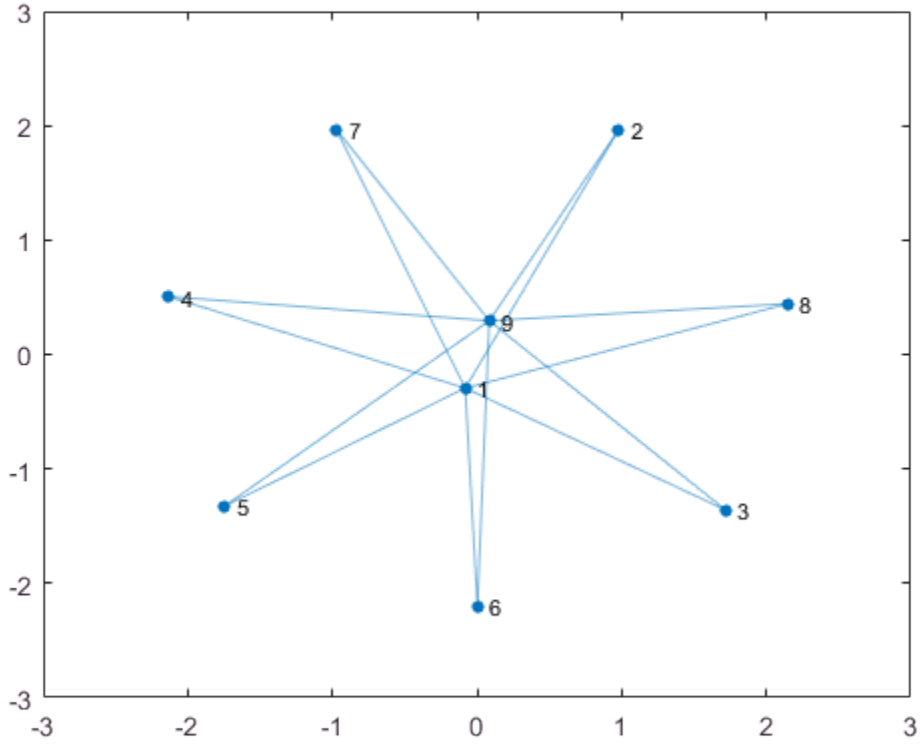

Use custom node coordinates for the graph nodes.

```
h.XData = [0 -3 -2 -1 0 1 2 3 0];
h.YData = [2 0 0 0 0 0 0 0 -2];
```

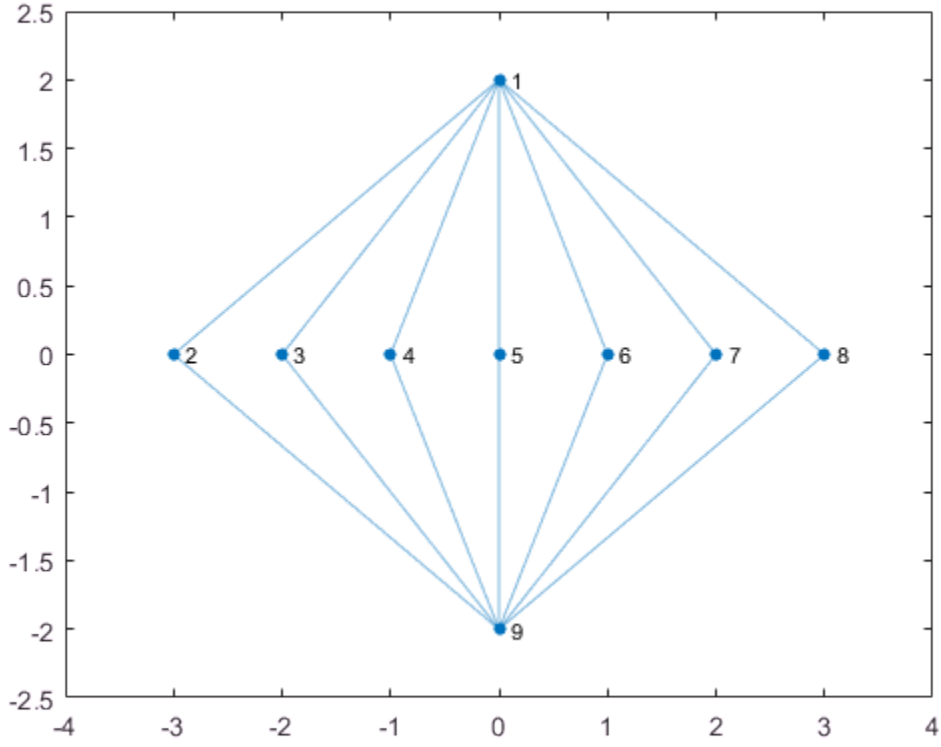

Make the graph nodes red.

```
h.NodeColor = 'r';
```

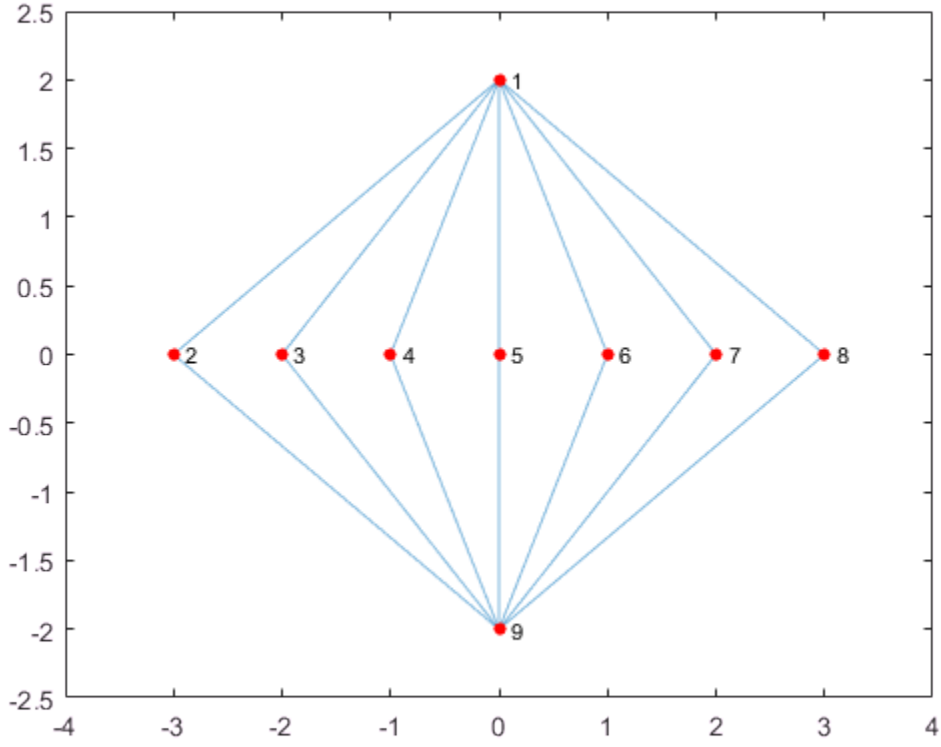

Use dashed lines for the graph edges.

```
h.LineStyle = '--';
```

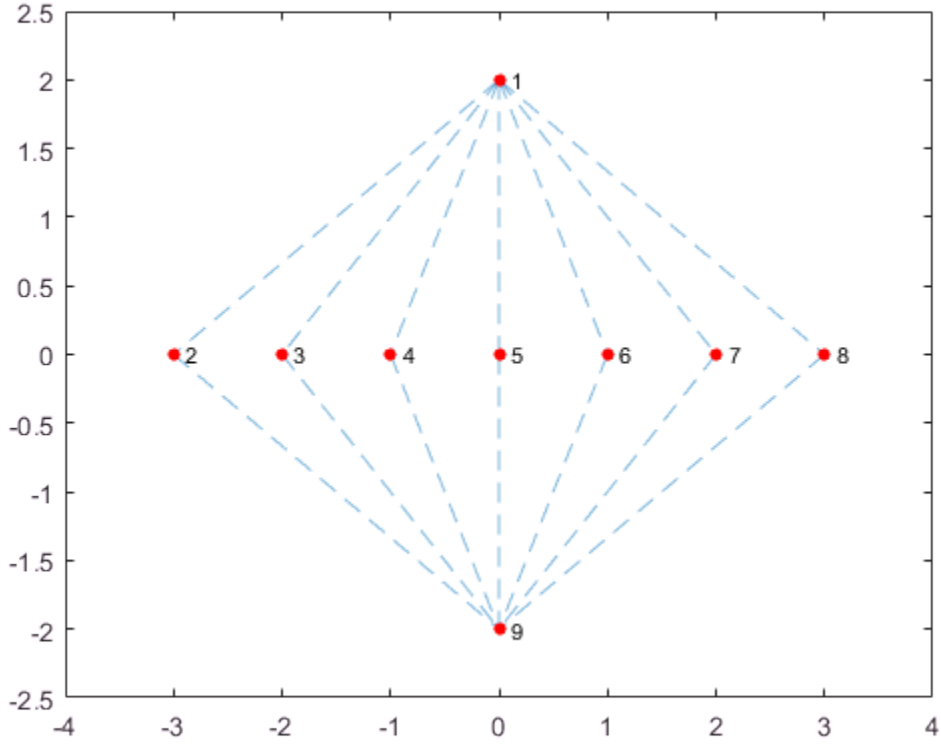

Increase the size of the nodes.

```
h.MarkerSize = 8;
```

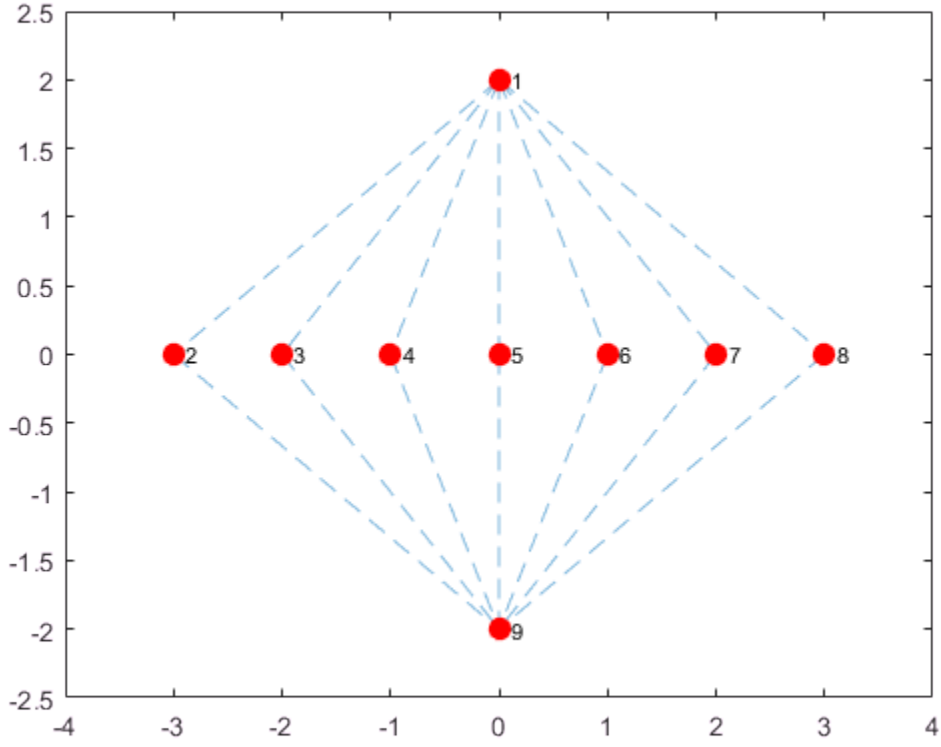

Saving and Loading GraphPlot Objects

Use the `savefig` function to save a graph plot figure.

```
s = [1 1 1 2 2 3 3 4 5 5 6 7];
t = [2 4 5 3 6 4 7 8 6 8 7 8];
G = graph(s,t);
h = plot(G);
savefig('cubegraph.fig');
clear all
close all
```

Use `openfig` to load the graph plot figure back into MATLAB. `openfig` also returns a handle to the figure, `y`.

```
y = openfig('cubegraph.fig');
```

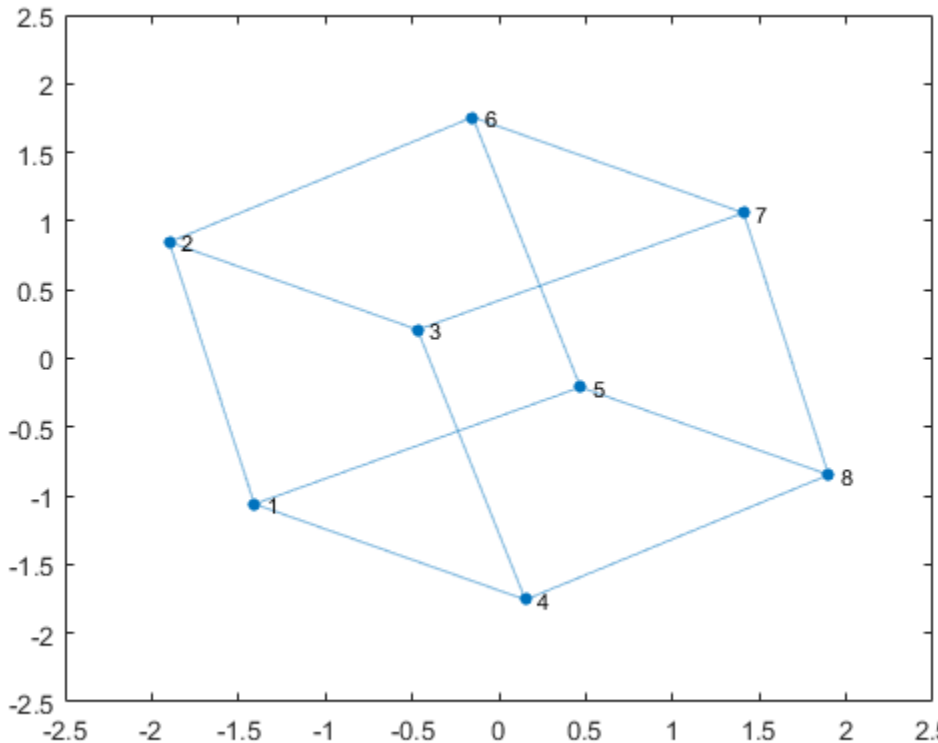

Use the `findobj` function to locate the correct object handle using one of the property values. Using `findobj` allows you to continue manipulating the original `GraphPlot` object used to generate the figure.

```
h = findobj('Marker','o')
```

```
h =

  GraphPlot with properties:

     NodeColor: [0 0.4470 0.7410]
```

```
  MarkerSize: 4
      Marker: 'o'
   EdgeColor: [0 0.4470 0.7410]
   LineWidth: 0.5000
   LineStyle: '-'
   NodeLabel: {'1'  '2'  '3'  '4'  '5'  '6'  '7'  '8'}
   EdgeLabel: {}
       XData: [-1.4087 -1.8990 -0.4692 0.1523 0.4692 -0.1523 1.4087 1.8990]
       YData: [-1.0598 0.8473 0.2093 -1.7563 -0.2093 1.7563 1.0598 -0.8473]
       ZData: [0 0 0 0 0 0 0 0]

Use GET to show all properties
```

See Also

See Also

digraph | graph

Topics

graph
GraphPlot Properties
"Graph Plotting and Customization"
"Add Node Properties to Graph Plot Data Cursor"

Introduced in R2015b

GraphPlot Properties

Control graph plot appearance and behavior

Description

`GraphPlot` properties control the appearance and behavior of plotted graphs. By changing property values, you can modify aspects of the graph display. Use dot notation to refer to a particular object and property:

```
G = graph([1 1 1 1 5 5 5 5],[2 3 4 5 6 7 8 9]);
h = plot(G);
c = h.EdgeColor;
h.EdgeColor = 'k';
```

Graph Edges

`ArrowSize` — Arrow size
positive value

Note: `ArrowSize` affects only the display of directed graphs created using `digraph`.

Arrow size, specified as a positive value in point units. The default value of `ArrowSize` is `7` for graphs with 100 or fewer nodes, and `4` for graphs with more than 100 nodes.

Example: `15`

`EdgeAlpha` — Transparency of graph edges
`0.5` (default) | scalar value between `0` and `1` inclusive

Transparency of graph edges, specified as a scalar value between `0` and `1` inclusive. A value of `1` means fully opaque and `0` means completely transparent (invisible).

Example: `0.25`

`EdgeCData` — Color data of edge lines
vector

Color data of edge lines, specified as a vector with length equal to the number of edges in the graph. The values in `EdgeCData` map linearly to the colors in the current colormap, resulting in different colors for each edge in the plotted graph.

`EdgeColor` — Edge color

`[0 0.4470 0.7410]` (default) | RGB triplet or color name | `'flat'` | `'none'`

Edge color, specified as one of these values:

- `'none'` — Edges are not drawn.
- `'flat'` — Color of each edge depends on the value of `EdgeCData`.
- RGB triplet or a color name — Edges use the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `plot(G,'EdgeColor','r')` creates a graph plot with red edges.

`EdgeLabel` — Edge labels

`{}` (default) | vector | cell array of character vectors

Edge labels, specified as a numeric vector or cell array of character vectors. The length of `EdgeLabel` must be equal to the number of edges in the graph. By default `EdgeLabel` is an empty cell array (no edge labels are displayed).

Example: `{'A', 'B', 'C'}`

Example: `[1 2 3]`

Example: `plot(G,'EdgeLabels',G.Edges.Weight)` labels the graph edges with their weights.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `cell`

`EdgeLabelMode` — Selection mode for edge labels

`'manual'` (default) | `'auto'`

Selection mode for edge labels, specified as `'manual'` (default) or `'auto'`. Specify `EdgeLabelMode` as `'auto'` to populate `EdgeLabel` with the edge weights in `G.Edges.Weight` (if available), or the edge indices `G.Edges(k,:)` (if no weights are available). Specifying `EdgeLabelMode` as `'manual'` does not change the values in `EdgeLabel`.

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	————————
`'--'`	Dashed line	- — — — —
`':'`	Dotted line	.....
`'-.'`	Dash-dotted line	—·—·—·—·-
`'none'`	No line	No line

`LineWidth` — Edge line width

`0.5` (default) | positive value

Edge line width, specified as a positive value in point units.

Example: `0.75`

Graph Nodes

`Marker` — Node marker symbol

`'o'` (default) | character vector

Node marker symbol, specified as one of the character vectors listed in this table. The default is to use circular markers for the graph nodes.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'+'`

Example: `'diamond'`

`MarkerSize` — Node marker size

positive value

Node marker size, specified as a positive value in point units. The default value of `MarkerSize` is 4 for graphs with 100 or fewer nodes, and `2` for graphs with more than 100 nodes.

Example: `10`

`NodeCData` — Color data of node markers

vector

Color data of node markers, specified as a vector with length equal to the number of nodes in the graph. The values in `NodeCData` map linearly to the colors in the current colormap, resulting in different colors for each node in the plotted graph.

`NodeColor` — Node color

`[0 0.4470 0.7410]` (default) | RGB triplet or color name | `'flat'` | `'none'`

Node color, specified as one of these values:

- `'none'` — Nodes are not drawn.
- `'flat'` — Color of each node depends on the value of `NodeCData`.
- RGB triplet or a color name — Nodes use the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `plot(G,'NodeColor','k')` creates a graph plot with black nodes.

`NodeLabel` — Node labels

node IDs (default) | vector | cell array of character vectors

Node labels, specified as a numeric vector or cell array of character vectors. The length of `NodeLabel` must be equal to the number of nodes in the graph. By default `NodeLabel` is a cell array containing the node IDs for the graph nodes:

- For nodes without names (that is, `G.Nodes` does not contain a `Name` variable), the node labels are the values `unique(G.Edges.EndNodes)` contained in a cell array.
- For named nodes, the node labels are `G.Nodes.Name'`.

Example: `{'A', 'B', 'C'}`

Example: `[1 2 3]`

Example: `plot(G,'NodeLabels',G.Nodes.Name)` labels the nodes with their names.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `cell`

`NodeLabelMode` — Selection mode for node labels

`'auto'` (default) | `'manual'`

Selection mode for node labels, specified as `'auto'` (default) or `'manual'`. Specify `NodeLabelMode` as `'auto'` to populate `NodeLabel` with the node IDs for the graph nodes (numeric node indices or node names). Specifying `NodeLabelMode` as `'manual'` does not change the values in `NodeLabel`.

`XData` — x-coordinate of nodes

vector

Note: `XData` and `YData` must be specified together so that each node has a valid (*x*,*y*) coordinate. Optionally, you can specify `ZData` for 3-D coordinates.

---

x-coordinate of nodes, specified as a vector with length equal to the number of nodes in the graph.

`YData` — y-coordinate of nodes

vector

Note: `XData` and `YData` must be specified together so that each node has a valid (*x*,*y*) coordinate. Optionally, you can specify `ZData` for 3-D coordinates.

---

y-coordinate of nodes, specified as a vector with length equal to the number of nodes in the graph.

`ZData` — z-coordinate of nodes

vector

Note: `XData` and `YData` must be specified together so that each node has a valid (*x*,*y*) coordinate. Optionally, you can specify `ZData` for 3-D coordinates.

---

z-coordinate of nodes, specified as a vector with length equal to the number of nodes in the graph.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the GraphPlot.
- `'off'` — Hide the GraphPlot without deleting it. You still can access the properties of an invisible GraphPlot object.

Identifiers

`Type` — Type of graphics object

`'graphplot'`

This property is read-only.

Type of graphics object, returned as `'graphplot'`. Use this property to find all objects of a given type within a plotting hierarchy, such as searching for the type using `findobj`.

`Tag` — Tag to associate with GraphPlot

`''` (default) | character vector

Tag to associate with the GraphPlot, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

Data Types: `char`

`UserData` — Data to associate with GraphPlot

`[ ]` (default) | scalar, vector, or matrix | cell array | character array | table | structure

Data to associate with the GraphPlot object, specified as a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `struct` | `table` | `cell`

`DisplayName` — Text used by legend

`''` (default) | character vector

Text used by the legend, specified as a character vector. The text appears next to an icon of the GraphPlot.

Example: `'Text Description'`

For multiline text, create the character vector using `sprintf` with the new line character `\n`.

Example: `sprintf('line one\nline two')`

Alternatively, you can specify the legend text using the `legend` function.

- If you specify the text as an input argument to the `legend` function, then the legend uses the specified text and sets the `DisplayName` property to the same value.
- If you do not specify the text as an input argument to the `legend` function, then the legend uses the text in the `DisplayName` property. If the `DisplayName` property does not contain any text, then the legend generates a character vector. The character vector has the form `'dataN'`, where `N` is the number assigned to the GraphPlot object based on its location in the list of legend entries.

If you edit interactively the character vector in an existing legend, then MATLAB updates the `DisplayName` property to the edited character vector.

`Annotation` — Legend icon display style

`Annotation` object

This property is read-only.

Legend icon display style, returned as an `Annotation` object. Use this object to include or exclude the GraphPlot from a legend.

1. Query the `Annotation` property to get the `Annotation` object.
2. Query the `LegendInformation` property of the `Annotation` object to get the `LegendEntry` object.
3. Specify the `IconDisplayStyle` property of the `LegendEntry` object to one of these values:
   - `'on'` — Include the GraphPlot object in the legend as one entry (default).
   - `'off'` — Do not include the GraphPlot object in the legend.
   - `'children'` — Include only children of the GraphPlot object as separate entries in the legend.

If a legend already exists and you change the `IconDisplayStyle` setting, then you must call `legend` to update the display.

Parent/Child

`Parent` — Parent of GraphPlot

axes object | group object | transform object

Parent of GraphPlot, specified as an axes, group, or transform object.

`Children` — Children of GraphPlot

empty `GraphicsPlaceholder` array

The GraphPlot has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of GraphPlot object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — The GraphPlot object handle is always visible.
- `'off'` — The GraphPlot object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — The GraphPlot object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the GraphPlot at the command-line, but allows callback functions to access it.

If the GraphPlot object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the GraphPlot. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- The GraphPlot object — You can access properties of the GraphPlot object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the GraphPlot. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the GraphPlot when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the GraphPlot.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the GraphPlot responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the GraphPlot passes the click to the object below it in the current view of the figure window. The `HitTest` property of the GraphPlot has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the GraphPlot. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the GraphPlot that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the GraphPlot object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the GraphPlot is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the GraphPlot tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the GraphPlot. Setting the `CreateFcn` property on an existing GraphPlot has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during GraphPlot creation. MATLAB executes the callback after creating the GraphPlot and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- The GraphPlot object — You can access properties of the GraphPlot object from within the callback function. You also can access the GraphPlot object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the GraphPlot. MATLAB executes the callback before destroying the GraphPlot so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- The GraphPlot object — You can access properties of the GraphPlot object from within the callback function. You also can access the GraphPlot object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status of GraphPlot

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of GraphPlot, returned as `'on'` or `'off'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the GraphPlot begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the GraphPlot no longer exists.

Check the value of the `BeingDeleted` property to verify that the GraphPlot is not about to be deleted before querying or modifying it.

See Also

See Also

`digraph` | `graph` | `plot`

Topics

"Access Property Values"
graph
digraph
GraphPlot

Introduced in R2015b

gray

Gray colormap array

Syntax

```
c = gray
c = gray(m)
```

Description

`c = gray` returns the gray colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = gray(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the gray colormap.

```
surf(peaks);
colormap('gray');
```

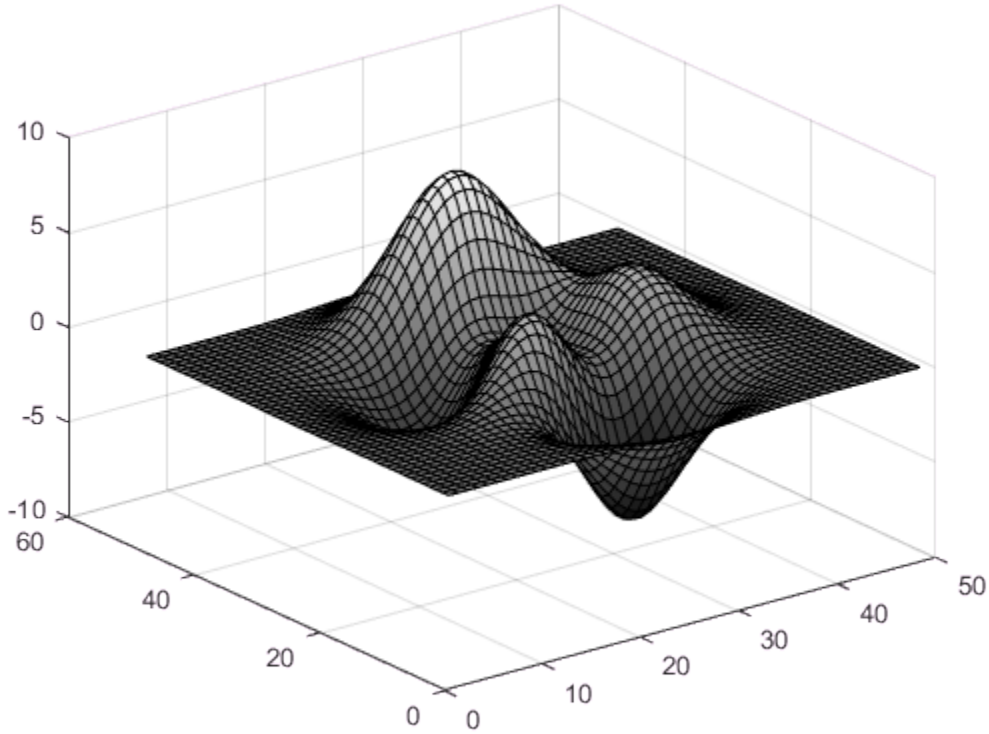

Get the gray colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = gray;
c = flipud(c);
colormap(c);
```

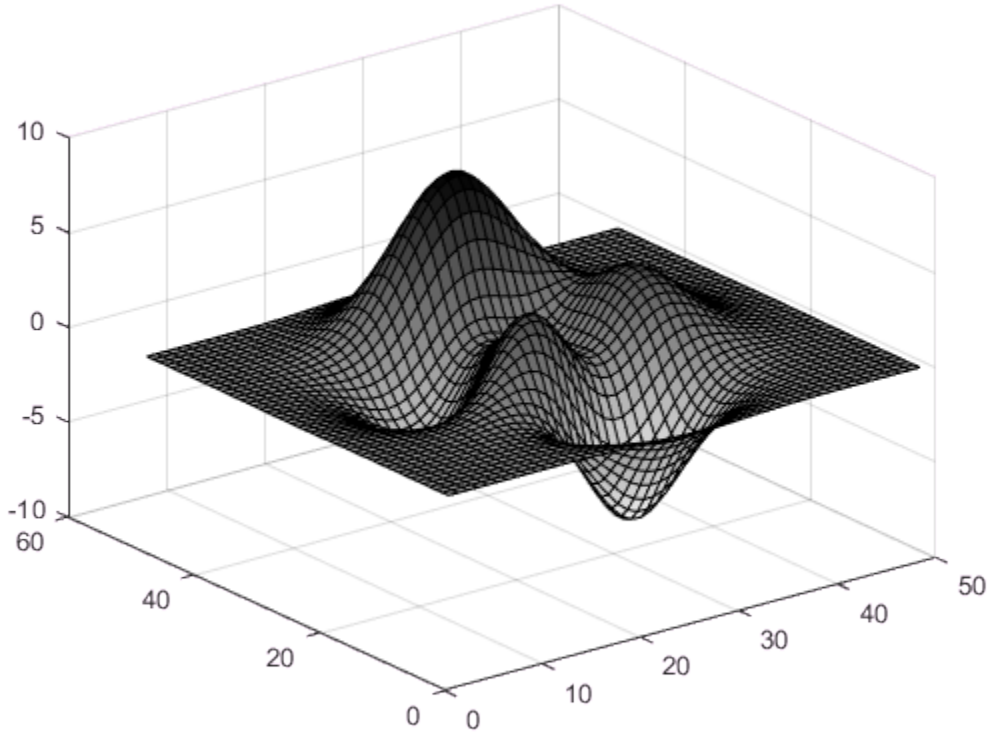

Downsample the Gray Colormap

Get a downsampled version of the gray colormap containing only twenty colors. Then display the contours of a paraboloid by applying the colormap and interpolated shading.

```
c = gray(20);
[X,Y] = meshgrid(-10:1:10);
Z = X.^2 + Y.^2;
surf(X,Y,Z);
colormap(c);
shading interp;
```

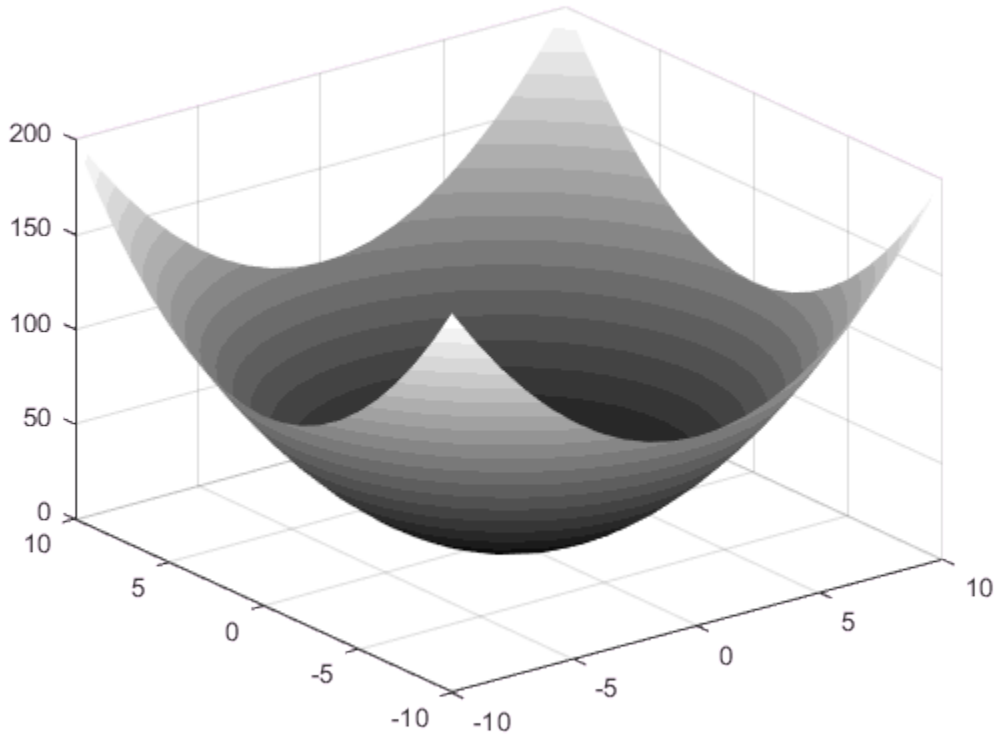

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

matlab.graphics.Graphics class

Package: matlab.graphics

Common base class for graphics objects

Description

The `matlab.graphics.Graphics` class is the base class of all graphics objects. Because graphics objects are part of a heterogeneous hierarchy, you can create arrays of mixed classes (for example, an array can contain lines, surfaces, axes, and other graphics objects).

The class of an array of mixed objects is `matlab.graphics.Graphics` because this class is common to all graphics object.

Attributes

`Abstract`	`true`
`HandleCompatible`	`true`

To learn about attributes of classes, see Class Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.graphics.GraphicsPlaceholder

Topics

Class Attributes
Property Attributes

matlab.graphics.GraphicsPlaceholder class

Package: matlab.graphics
Superclasses: matlab.graphics.Graphics

Default graphics object

Description

The `matlab.graphics.GraphicsPlaceholder` class defines the default graphics object. Instances of this class appear as:

- Elements of pre-allocated arrays created with `gobjects`.
- Unassigned array element placeholders
- Graphics object properties that hold object handles, but are set to empty values
- Empty values returned by functions that return object handles (for example, `findobj`).

Attributes

`Sealed`	`true`
`ConstructOnLoad`	`true`
`HandleCompatible`	`true`

To learn about attributes of classes, see Class Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Test for Current Figure

```
if isempty(get(groot,'CurrentFigure')
   ... % There is no current figure
end
```

See Also

Topics

"Graphics Object Programming"
Class Attributes
Property Attributes

graymon

Set default figure properties for grayscale monitors

Compatibility

`graymon` is not recommended.

Syntax

```
graymon
```

Description

`graymon` sets defaults for graphics properties to produce more legible displays for grayscale monitors.

See Also

`axes` | `figure`

Introduced before R2006a

grid

Display or hide axes grid lines

Syntax

```
grid on
grid off
grid
grid minor
grid(target, ___ )
```

Description

`grid on` displays the major grid lines for the current axes or chart returned by the `gca` command. Major grid lines extend from each tick mark.

`grid off` removes all grid lines from the current axes or chart.

`grid` toggles the visibility of the major grid lines.

`grid minor` toggles the visibility of the minor grid lines. Minor grid lines lie between the tick marks. Not all types of charts support minor grid lines.

`grid(target, ___ )` uses the axes or chart specified by `target` instead of the current axes or chart. Specify `target` as the first input argument. Use single quotes around other input arguments, for example, `grid(target,'on')`.

Examples

Display Grid Lines

Display the grid lines for a sine plot.

```
x = linspace(0,10);
```

```
y = sin(x);
plot(x,y)
grid on
```

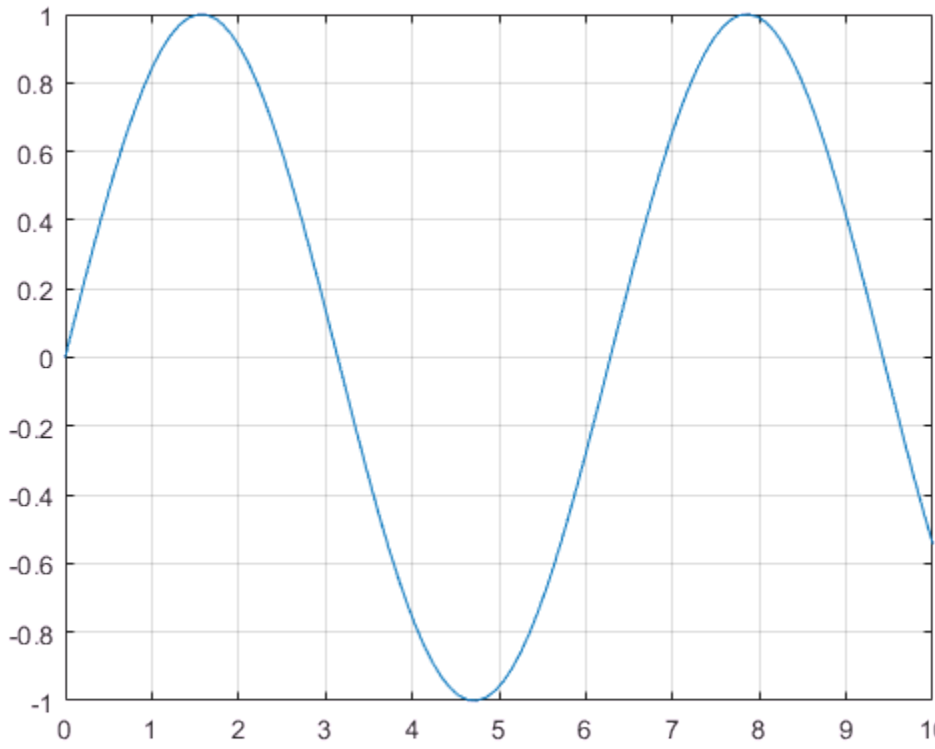

Remove Grid Lines

Create a surface plot and remove the grid lines.

```
[X,Y,Z] = peaks;
surf(X,Y,Z)
grid off
```

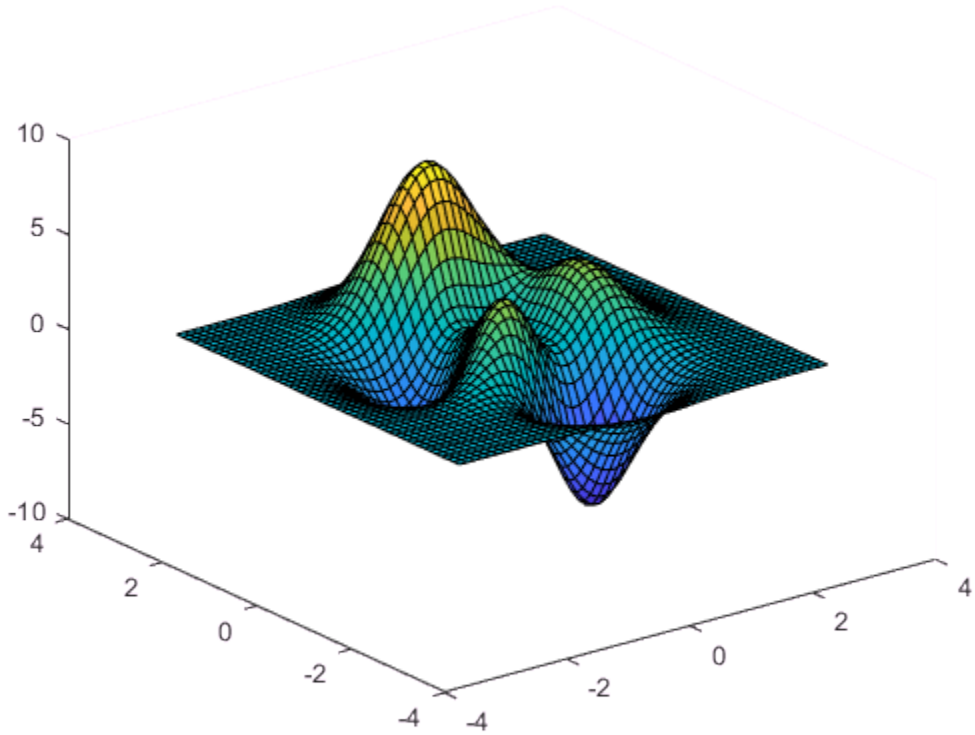

Display Major and Minor Grid Lines

Display the major and minor grid lines for a sine plot.

```
x = linspace(0,10);
y = sin(x);
plot(x,y)
grid on
grid minor
```

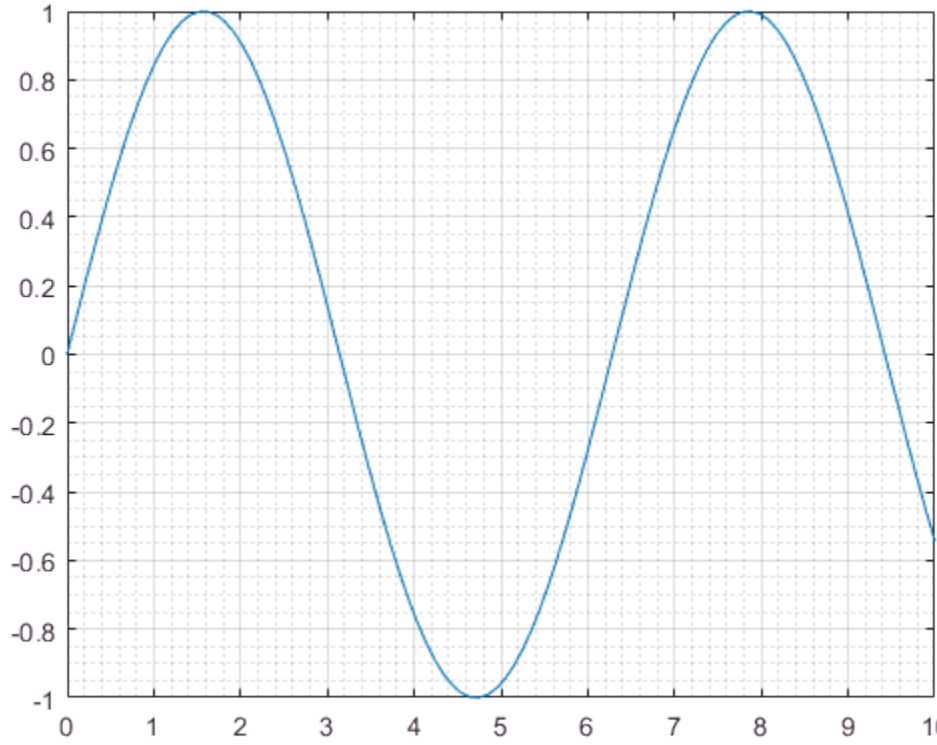

Display Grid Lines on Specific Axes

Create a figure with two subplots and assign the Axes objects to the variables `ax1` and `ax2`. Plot a sine wave in each subplot. Then display the grid lines on the upper subplot by specifying `ax1` as an input argument to the `grid` function.

```
x = linspace(0,10);
y = sin(x);
ax1 = subplot(2,1,1);
plot(ax1,x,y)

y2 = sin(3*x);
```

```
ax2 = subplot(2,1,2);
plot(ax2,x,y2)
```

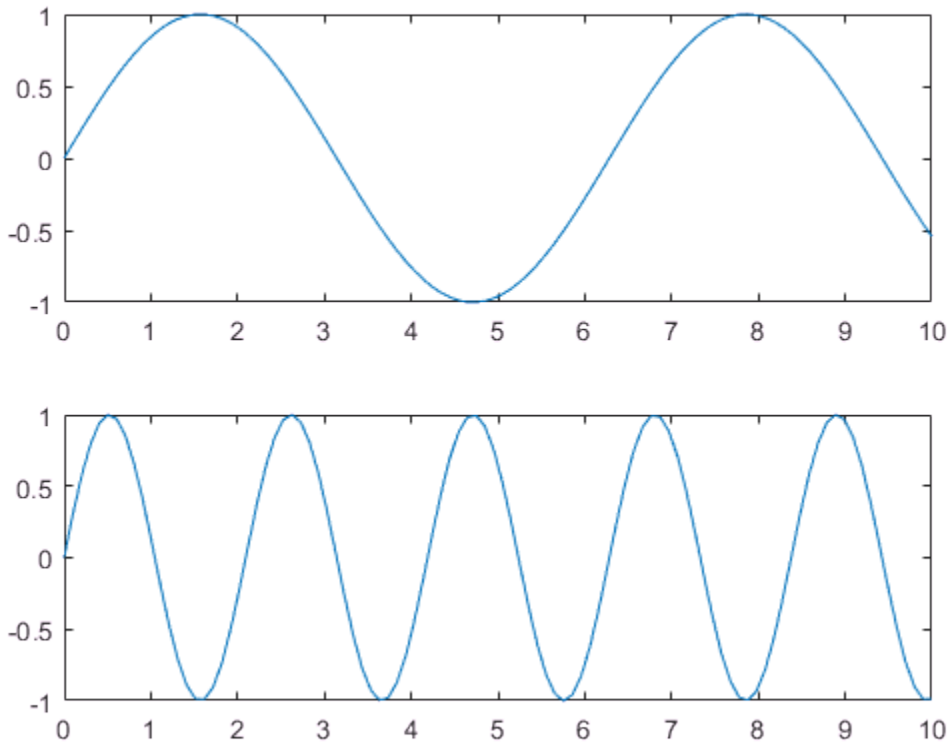


```
grid(ax1,'on')
```

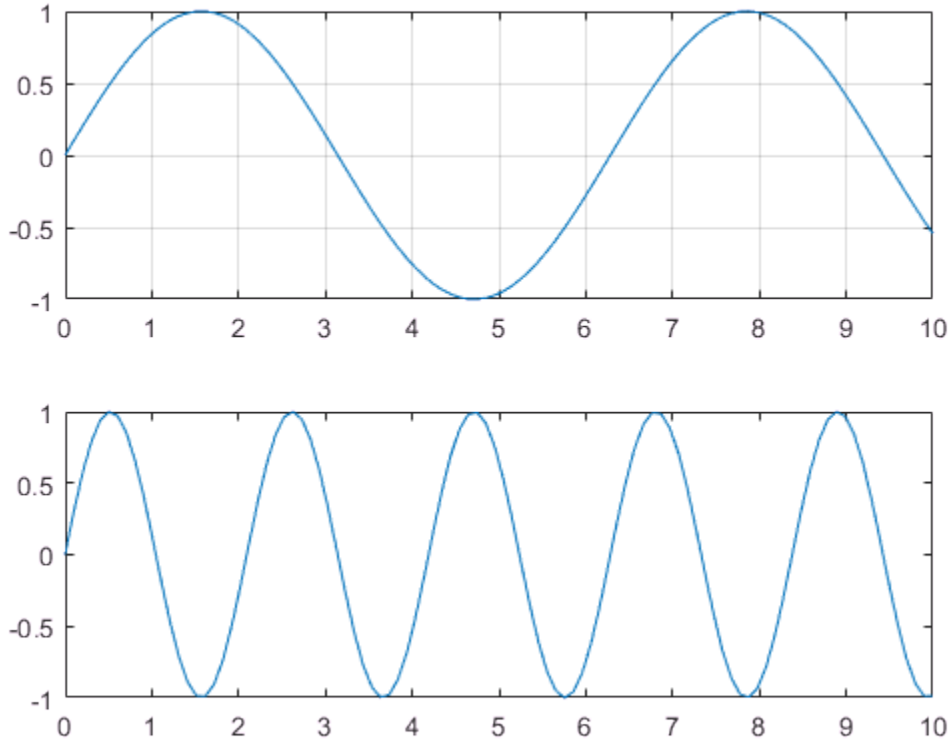

- "Add Grid Lines and Edit Placement"

Input Arguments

`target` — Target axes or chart
`Axes` object | `PolarAxes` object | graphics object

Target axes or chart, specified as an `Axes` object, a `PolarAxes` object, or a graphics object that has a `GridVisible` property. For example, you can add or remove grid lines from a `HeatmapChart` object using the `grid` function.

If you do not specify the target, then the `grid` function affects the graphics object returned by the `gca` command.

Tips

- When working with Cartesian axes, some axes properties affect the appearance of the grid lines. This table lists a subset of axes properties related to the grid lines.

Axes Property	Description
XTick, YTick, ZTick	Location of tick marks and major grid lines for each axis direction
XGrid, YGrid, ZGrid	Display of major grid lines for each axis direction
XMinorGrid, YMinorGrid, ZMinorGrid	Display of minor grid lines for each axis direction
LineWidth	Line width of grid lines, axes box outline, and tick marks
GridLineStyle	Major grid line style
MinorGridLineStyle	Minor grid line style
GridColor	Major grid line color
MinorGridColor	Minor grid line color
GridAlpha	Major grid line transparency
MinorGridAlpha	Minor grid line transparency
Layer	Location of grid lines in relation to the plotted data

- When working with polar axes, some polar axes properties affect the appearance of the grid lines. This table lists a subset of polar axes properties related to the grid lines.

PolarAxes Property	Description
ThetaTick, RTick	Location of tick marks and major grid lines for each axis direction

PolarAxes Property	Description
ThetaGrid, RGrid	Display of major grid lines for each axis direction
ThetaMinorGrid, RMinorGrid	Display of minor grid lines for each axis direction
LineWidth	Width of outline, tick marks, and grid lines
GridLineStyle	Major grid line style
MinorGridLineStyle	Minor grid line style
GridColor	Major grid line color
MinorGridColor	Minor grid line color
GridAlpha	Major grid line transparency
MinorGridAlpha	Minor grid line transparency
Layer	Location of grid lines in relation to the plotted data

Algorithms

The `grid` function sets these graphics object properties to either `'on'` or `'off'`:

- XGrid, YGrid, and ZGrid when working with Cartesian `Axes` objects.
- ThetaGrid and RGrid when working with `PolarAxes` objects.
- `GridVisible` when working with other types of graphics objects, such as a `HeatmapChart` object.

See Also

See Also

Functions

`axis` | `box` | `legend` | `title` | `xlabel` | `ylabel`

Properties

Axes Properties | PolarAxes Properties

Topics

"Add Grid Lines and Edit Placement"

Introduced before R2006a

griddata

Interpolate 2-D or 3-D scattered data

Syntax

```
vq = griddata(x,y,v,xq,yq)
vq = griddata(x,y,z,v,xq,yq,zq)
vq = griddata( ___ ,method)
```

Description

`vq = griddata(x,y,v,xq,yq)` fits a surface of the form $v = f(x,y)$ to the scattered data in the vectors `(x,y,v)`. The `griddata` function interpolates the surface at the query points specified by `(xq,yq)` and returns the interpolated values, `vq`. The surface always passes through the data points defined by `x` and `y`.

`vq = griddata(x,y,z,v,xq,yq,zq)` fits a hypersurface of the form $v = f(x,y,z)$.

`vq = griddata( ___ ,method)` specifies the interpolation method used to compute `vq` using any of the input arguments in the previous syntaxes.

Note: Qhull-specific options are no longer supported. Remove the `options` argument from all instances in your code that pass it to `griddata`.

In a future release, `griddata` will not accept any input vectors of mixed orientation. In addition, the following syntaxes will be removed:

```
[Xq,Yq,Vq] = griddata(x,y,v,xq,yq)
[Xq,Yq,Vq] = griddata(x,y,v,xq,yq, method)
```

To specify a grid of query points, construct a full grid with `ndgrid` or `meshgrid` before calling `griddata`.

Examples

Interpolate Scattered Data Over Uniform Grid

Interpolate randomly scattered data on a uniform grid of query points.

Sample a function at 200 random points between `-2.5` and `2.5`.

```
xy = -2.5 + 5*gallery('uniformdata',[200 2],0);
x = xy(:,1);
y = xy(:,2);
v = x.*exp(-x.^2-y.^2);
```

`x`, `y`, and `v` are vectors containing scattered (nonuniform) sample points and data.

Define a regular grid and interpolate the scattered data over the grid.

```
[xq,yq] = meshgrid(-2:.2:2, -2:.2:2);
vq = griddata(x,y,v,xq,yq);
```

Plot the gridded data as a mesh and the scattered data as dots.

```
mesh(xq,yq,vq)
hold on
plot3(x,y,v,'o')
xlim([-2.7 2.7])
ylim([-2.7 2.7])
```

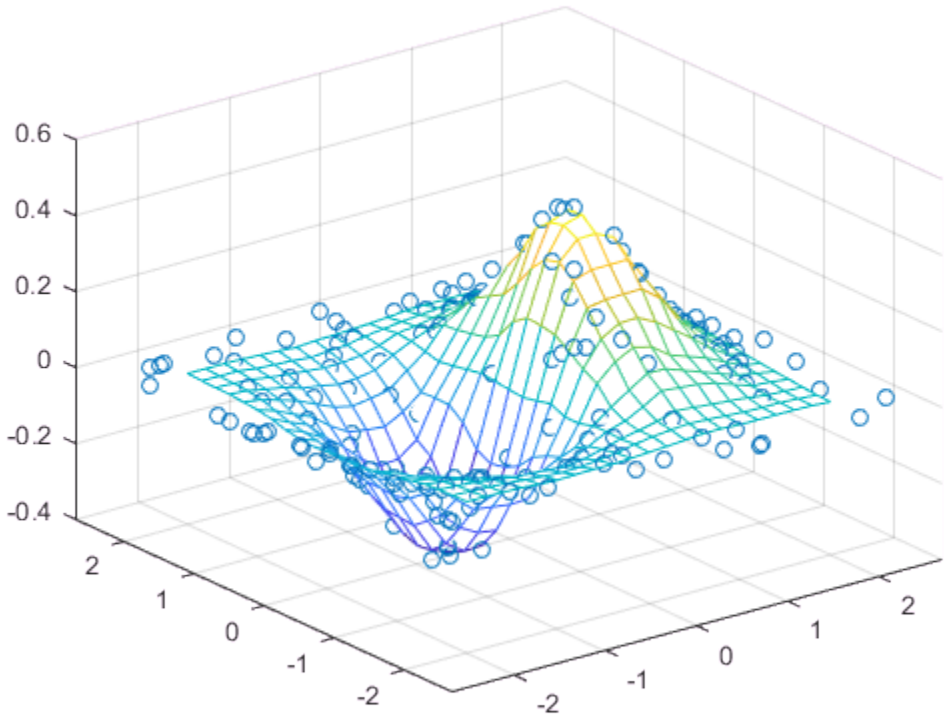

Interpolate 4-D Data Set Over Grid

Interpolate a 3-D slice of a 4-D function that is sampled at randomly scattered points.

Sample a 4-D function $v(x, y, z)$ at 2500 random points between `-1` and `1`. The vectors `x`, `y`, and `z` contain the nonuniform sample points.

```
x = 2*rand(2500,1) - 1;
y = 2*rand(2500,1) - 1;
z = 2*rand(2500,1) - 1;
v = x.^2 + y.^3 - z.^4;
```

Define a regular grid with *xy* points in the range [-1, 1], and set $z = 0$. Interpolating on this grid of 2-D query points produces a 3-D interpolated slice of the 4-D data set.

```
d = -1:0.05:1;
[xq,yq,zq] = meshgrid(d,d,0);
```

Interpolate the scattered data on the grid. Plot the results.

```
vq = griddata(x,y,z,v,xq,yq,zq);
plot3(x,y,v,'ro')
hold on
surf(xq,yq,vq)
```

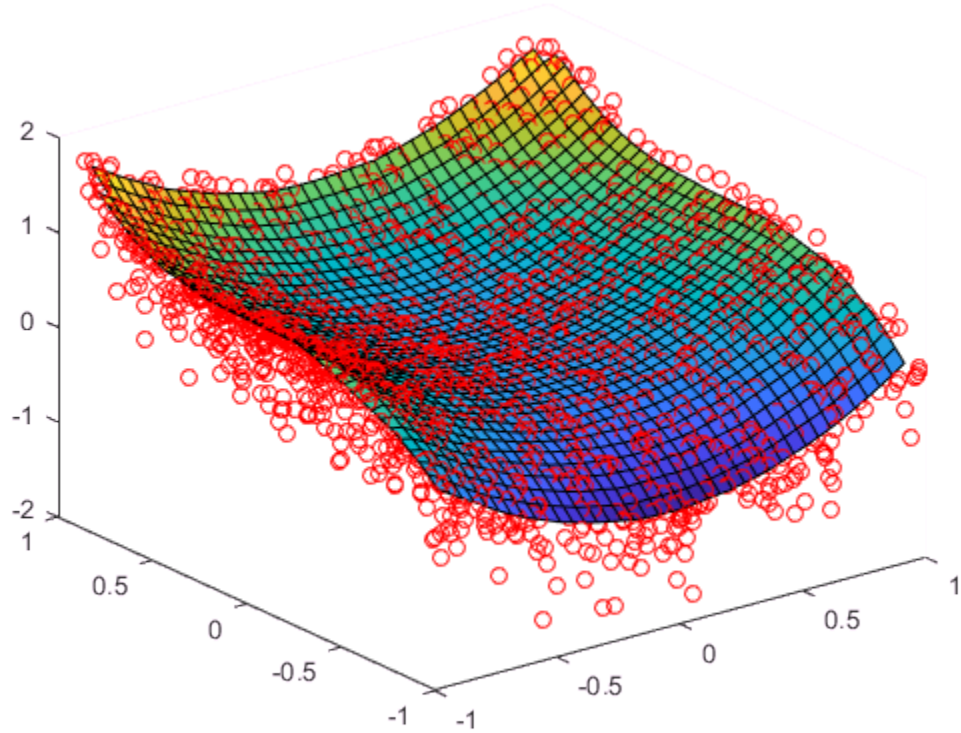

Comparison of Scattered Data Interpolation Methods

Compare the results of several different interpolation algorithms offered by `griddata`.

Create a sample data set of 50 scattered points. The number of points is artificially small to highlight the differences between the interpolation methods.

```
x = -3 + 6*rand(50,1);
y = -3 + 6*rand(50,1);
v = sin(x).^4 .* cos(y);
```

Create a grid of query points.

```
[xq,yq] = meshgrid(-3:0.1:3);
```

Interpolate the sample data using the `'nearest'`, `'linear'`, `'natural'`, and `'cubic'` methods. Plot the results for comparison.

```
z1 = griddata(x,y,v,xq,yq,'nearest');
plot3(x,y,v,'mo')
hold on
mesh(xq,yq,z1)
title('Nearest Neighbor')
legend('Sample Points','Interpolated Surface','Location','NorthWest')
```

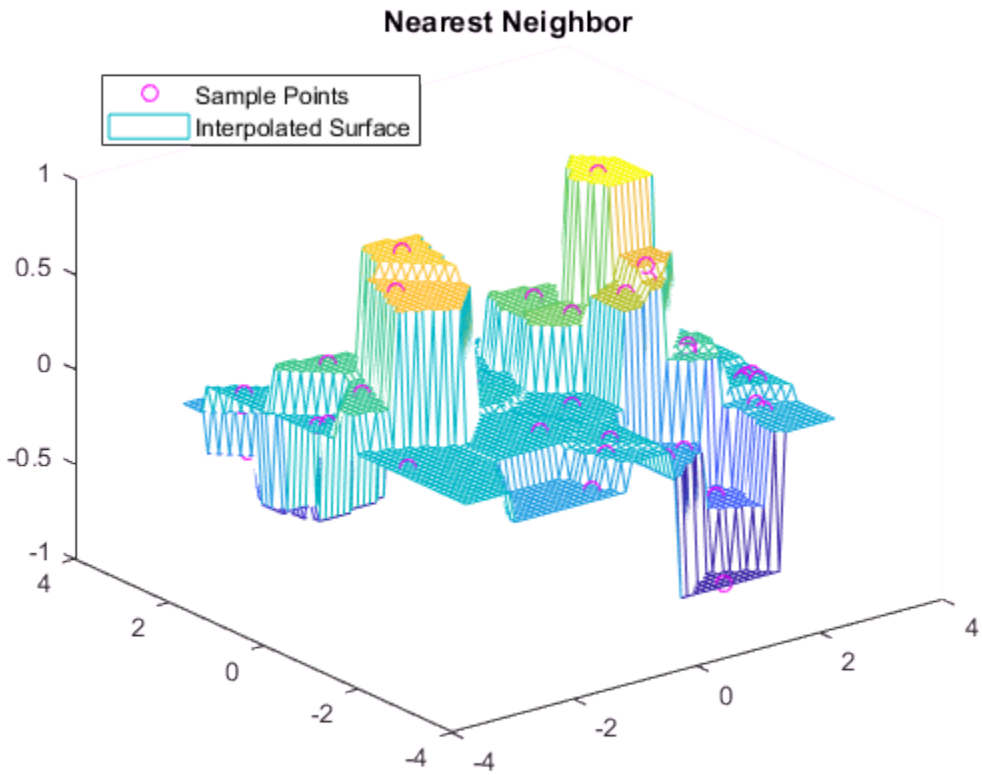


```
z2 = griddata(x,y,v,xq,yq,'linear');
figure
plot3(x,y,v,'mo')
hold on
mesh(xq,yq,z2)
title('Linear')
legend('Sample Points','Interpolated Surface','Location','NorthWest')
```

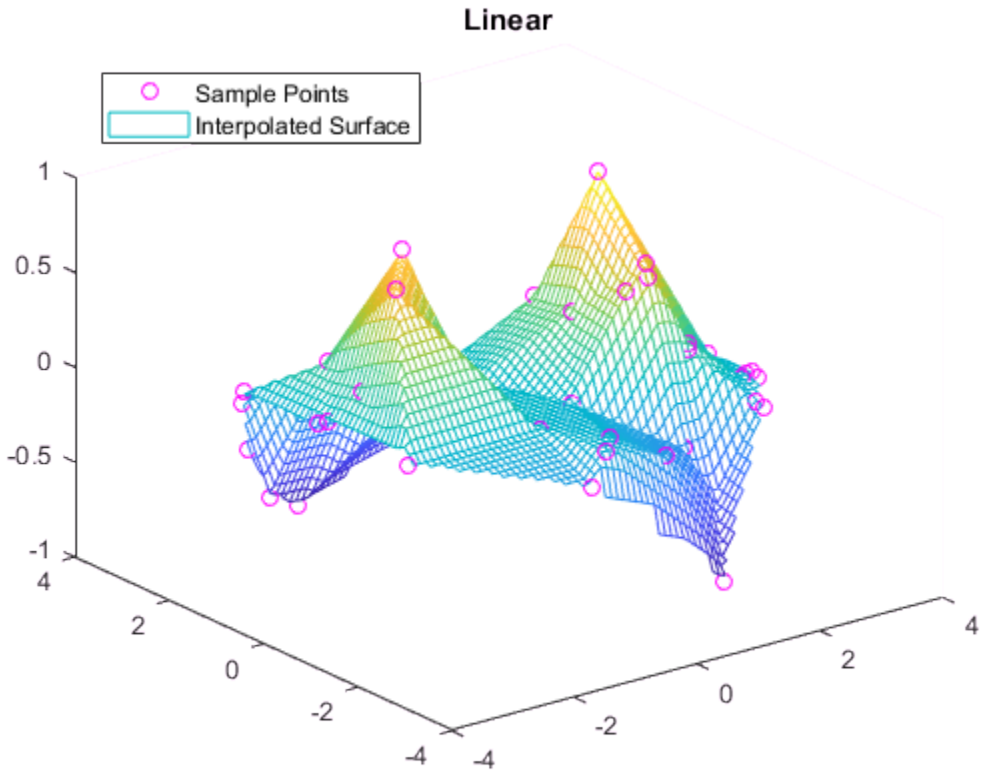


```
z3 = griddata(x,y,v,xq,yq,'natural');
figure
plot3(x,y,v,'mo')
hold on
mesh(xq,yq,z3)
title('Natural Neighbor')
legend('Sample Points','Interpolated Surface','Location','NorthWest')
```

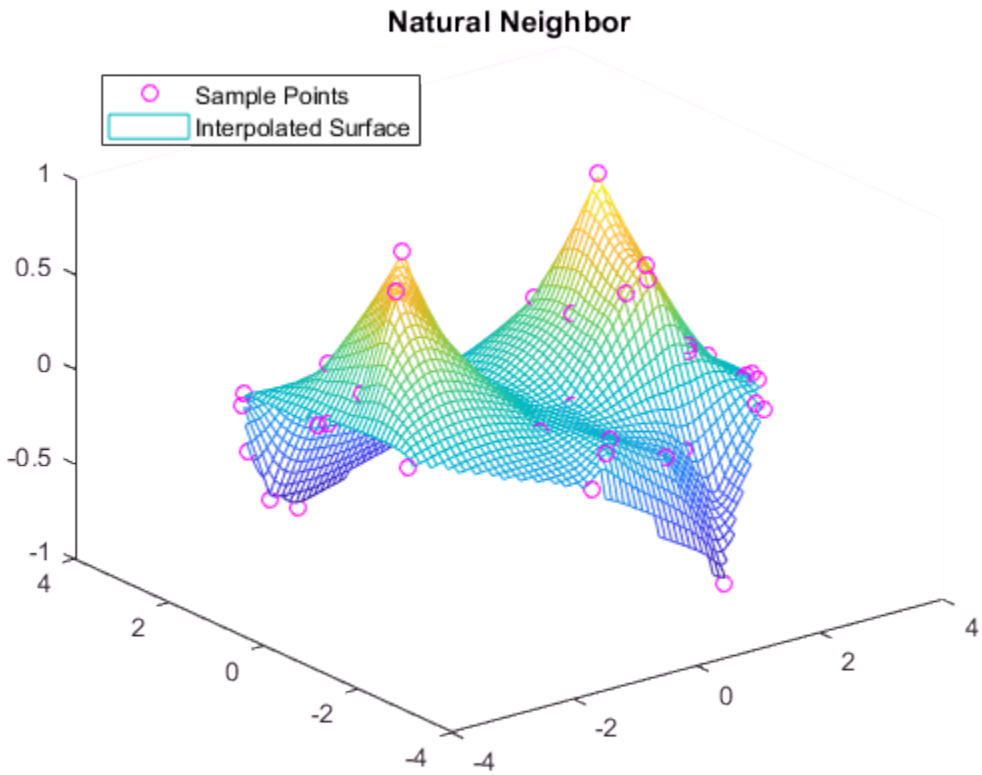


```
z4 = griddata(x,y,v,xq,yq,'cubic');
figure
plot3(x,y,v,'mo')
hold on
mesh(xq,yq,z4)
title('Cubic')
legend('Sample Points','Interpolated Surface','Location','NorthWest')
```

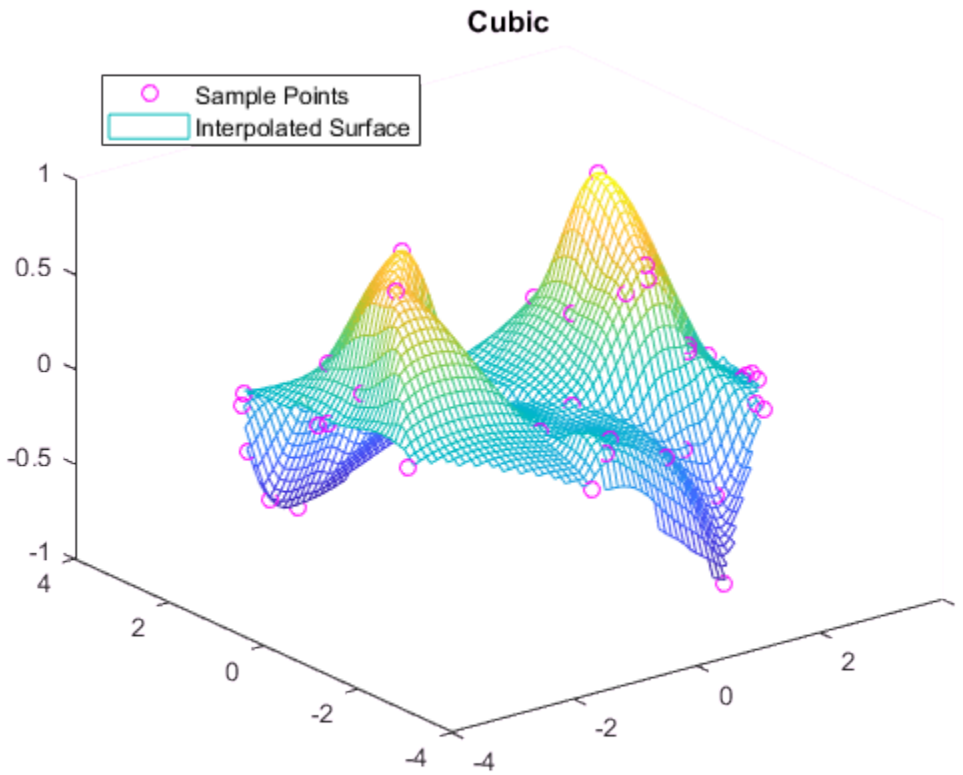

Plot the exact solution.

```
figure
plot3(x,y,v,'mo')
hold on
mesh(xq,yq,sin(xq).^4 .* cos(yq))
title('Exact Solution')
legend('Sample Points','Exact Surface','Location','NorthWest')
```

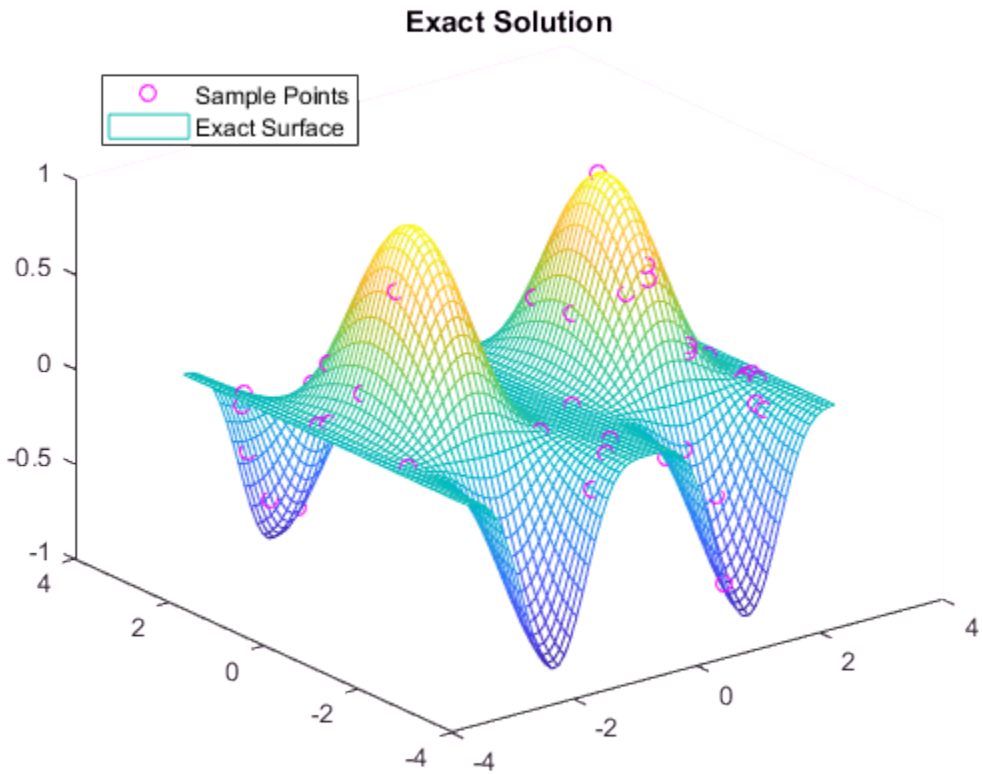

Input Arguments

x, y, z — Sample point coordinates
vectors

Sample point coordinates, specified as vectors. Corresponding elements in `x`, `y`, and `z` specify the *xyz* coordinates of points where the sample values `v` are known. The sample points must be unique.

Data Types: `single` | `double`

`v` — Sample values

vector

Sample values, specified as a vector. The sample values in `v` correspond to the sample points in `x`, `y`, and `z`.

If `v` contains complex numbers, then `griddata` interpolates the real and imaginary parts separately.

Data Types: `single` | `double`
Complex Number Support: Yes

`xq, yq, zq` — Query points

vector | array

Query points, specified as vectors or arrays. Corresponding elements in the vectors or arrays specify the *xyz* coordinates of the query points. The query points are the locations where `griddata` performs interpolation.

- Specify arrays if you want to pass a grid of query points. Use `ndgrid` or `meshgrid` to construct the arrays.
- Specify vectors if you want to pass a collection of scattered points.

The specified query points must lie inside the convex hull of the sample data points. `griddata` returns `NaN` for query points outside of the convex hull.

Data Types: `single` | `double`

`method` — Interpolation method

`'linear'` (default) | `'nearest'` | `'natural'` | `'cubic'` | `'v4'`

Interpolation method, specified as one of the methods in this table.

Method	Description	Continuity
`'linear'`	Triangulation-based linear interpolation (default) supporting 2-D and 3-D interpolation.	C^0
`'nearest'`	Triangulation-based nearest neighbor interpolation supporting 2-D and 3-D interpolation.	Discontinuous

Method	Description	Continuity
`'natural'`	Triangulation-based natural neighbor interpolation supporting 2-D and 3-D interpolation. This method is an efficient tradeoff between linear and cubic.	C^1 except at sample points
`'cubic'`	Triangulation-based cubic interpolation supporting 2-D interpolation only.	C^2
`'v4'`	Biharmonic spline interpolation (MATLAB 4 `griddata` method) supporting 2-D interpolation only. Unlike the other methods, this interpolation is not based on a triangulation.	C^2

Data Types: `char`

Output Arguments

`vq` — Interpolated values

vector | array

Interpolated values, returned as a vector or array. The size of `vq` depends on the size of the query point inputs `xq`, `yq`, and `zq`:

- For 2-D interpolation, where `xq` and `yq` specify an `m`-by-`n` grid of query points, `vq` is an `m`-by-`n` array.
- For 3-D interpolation, where `xq`, `yq`, and `zq` specify an `m`-by-`n`-by-`p` grid of query points, `vq` is an `m`-by-`n`-by-`p` array.
- If `xq`, `yq`, (and `zq` for 3-D interpolation) are vectors that specify scattered points, then `vq` is a vector of the same length.

`vq` contains `NaN` values for query points outside the convex hull of the sample data.

See Also

See Also

`delaunay` | `griddatan` | `interpn` | `meshgrid` | `ndgrid` | `scatteredInterpolant`

Introduced before R2006a

griddatan

Interpolate N-D scattered data

Syntax

```
vq = griddatan(x,v,xq)
vq = griddatan(x,v,xq,method)
vq = griddatan(x,v,xq,method,options)
```

Description

`vq = griddatan(x,v,xq)` fits a hypersurface of the form $v = f(x)$ to the sample points `x` with values `v`. The `griddatan` function interpolates the surface at the query points specified by `xq` and returns the interpolated values, `vq`. The surface always passes through the data points defined by `x` and `v`.

`vq = griddatan(x,v,xq,method)` specifies the interpolation method used to compute `vq`. Options are `'linear'` or `'nearest'`.

`vq = griddatan(x,v,xq,method,options)` specifies a cell array of character vectors, `options`, to be used in Qhull via `delaunayn`.

Examples

Fit a Hypersurface

Interpolate a 4-D scattered data set and visualize a 3-D isosurface of the interpolated data.

Create a scattered set of sample points.

```
X = 2*gallery('uniformdata',[5000 3],0)-1;
Y = sum(X.^2,2);
```

Create x, y, and z grids to use as the 3-D set of query points, and interpolate the scattered data at these points.

```
d = -0.8:0.05:0.8;
[y0,x0,z0] = ndgrid(d,d,d);
XI = [x0(:) y0(:) z0(:)];
YI = griddatan(X,Y,XI);
```

Since it is difficult to visualize 4-D data sets, use isosurface at 0.8 to visualize the interpolation result.

```
YI = reshape(YI, size(x0));
p = patch(isosurface(x0,y0,z0,YI,0.8));
isonormals(x0,y0,z0,YI,p)
p.FaceColor = 'blue';
p.EdgeColor = 'none';
view(3)
axis equal
camlight
lighting phong
```

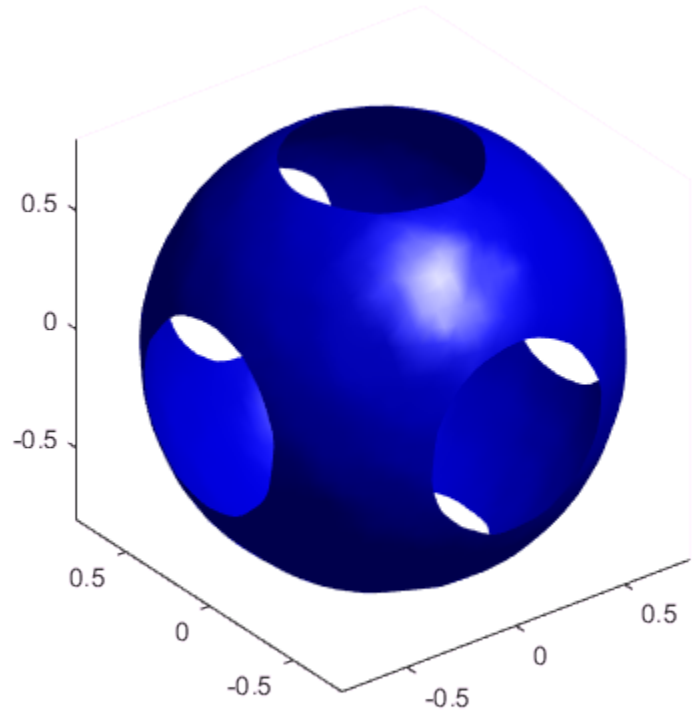

Nearest Neighbor Interpolation

Use nearest neighbor interpolation on a 3-D data set.

Create a sample 3-D data set. The matrix `X` contains the *xyz* locations of the observed data, and `v` contains the (randomly generated) observed data. This type of data set could represent, for example, oxygen levels in ocean water at these locations.

```
X = [rand(100,1) rand(100,1) rand(100,1)];
v = rand(100,1);
```

Use nearest neighbor interpolation to approximate the value of the underlying function at some query points.

```
[xx,yy,zz] = meshgrid(0.2:0.025:0.8);
xq = [xx(:) yy(:) zz(:)];
vq = griddatan(X,v,xq,'nearest');
```

Plot slices of the result on top of the sample point locations.

```
vq = reshape(vq,size(xx));
plot3(X(:,1),X(:,2),X(:,3),'r*')
hold on
slice(xx,yy,zz,vq,[0.2 0.4 0.6 0.8],0.5,0.5)
```

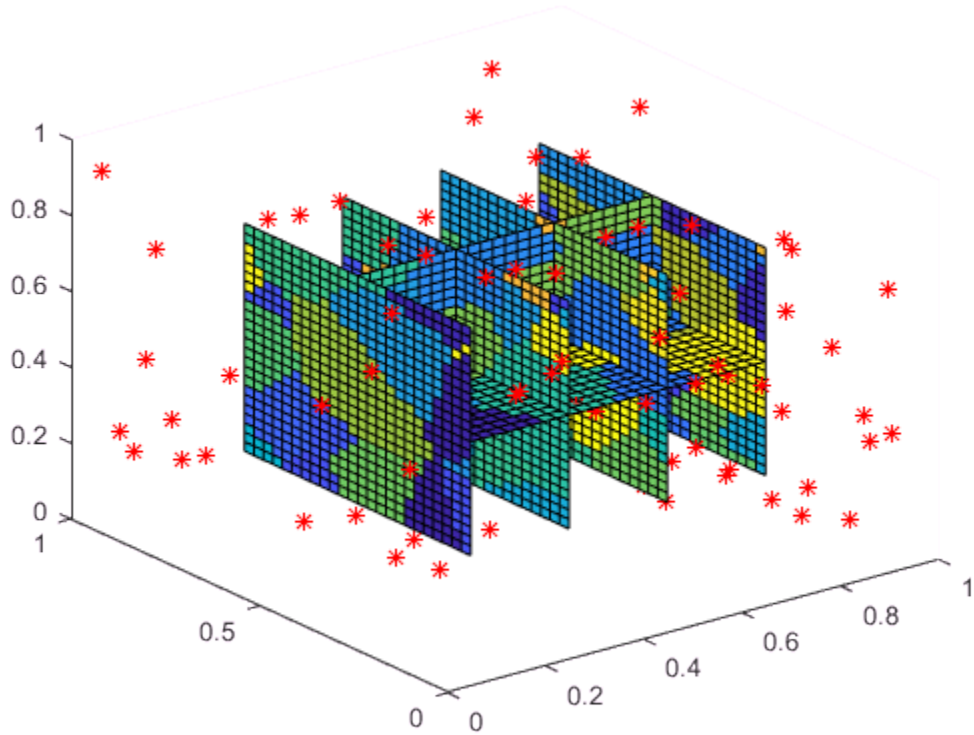

Input Arguments

x — Sample point coordinates
matrix

Sample point coordinates, specified as a matrix. Specify `x` as an `m`-by-`n` matrix to represent `m` points in `n`-dimensional space. The sample points must be unique.

Data Types: `single` | `double`

v — Sample values
vector

Sample values, specified as a vector. Specify `v` as a vector of length `m`, with one value for each sample point (row) specified in `x`.

If `v` contains complex numbers, then `griddatan` interpolates the real and imaginary parts separately.

Data Types: `single` | `double`
Complex Number Support: Yes

xq — Query points
matrix

Query points, specified as a matrix. Specify `xq` as a `p`-by-`n` matrix to represent `p` points in `n`-dimensional space. `xq` is usually created from a uniform grid produced by `ndgrid`.

Example:

Data Types: `single` | `double`

method — Interpolation method
`'linear'` (default) | `'nearest'` | `[]`

Interpolation method, specified as one of the values in this table. These methods are both based on a Delaunay triangulation of the input data.

Option	Description	Continuity
`'linear'` (default)	Triangulation-based linear interpolation.	C^0
`'nearest'`	Nearest neighbor interpolation.	Discontinuous

If `method` is `[]`, then `griddatan` uses the default `'linear'` method.

Data Types: `char`

`options` — Qhull-specific options
cell array | `[]` | `{''}`

Qhull-specific options, specified as a cell array. For a list of supported options, see Qhull Quick Reference.

If `options` is `[]`, then `griddatan` uses the default options:

- `{'Qt' 'Qbb' 'Qc'}` for 2-D and 3-D interpolations.
- `{'Qt' 'Qbb' 'Qc' 'Qx'}` for interpolations in 4+ dimensions.

If `options` is `{''}`, then `griddatan` does not use any options, not even the defaults.

Data Types: `cell`

Output Arguments

`vq` — Interpolated values
vector

Interpolated values, returned as a vector of length `p`. The interpolated values in `vq` correspond to the query points (rows) in `xq`.

Tips

- It is not practical to use `griddatan` for interpolation in dimensions higher than about 6-D, because the memory required by the underlying triangulation grows exponentially with the number of dimensions.

See Also

See Also
`delaunayn` | `griddata` | `meshgrid`

Introduced before R2006a

griddedInterpolant

Gridded data interpolation

Description

Use `griddedInterpolant` to perform interpolation on a 1-D, 2-D, 3-D, or N-D gridded data set. `griddedInterpolant` returns the interpolant `F` for the given dataset. You can evaluate `F` at a set of query points, such as `(xq,yq)` in 2-D, to produce interpolated values `vq = F(xq,yq)`.

Use `scatteredInterpolant` to perform interpolation with scattered data.

Create Object

Syntax

Description

`F = griddedInterpolant` creates an empty gridded data interpolant object.

`F = griddedInterpolant(x,v)` creates a 1-D interpolant from a vector of sample points `x` and corresponding values `v`.

`F = griddedInterpolant(X1,X2,...,Xn,V)` creates a 2-D, 3-D, or N-D interpolant using a full grid of sample points passed as a set of `n`-dimensional arrays `X1,X2,...,Xn`. The `V` array contains the sample values associated with the point locations in `X1,X2,...,Xn`. Each of the arrays `X1,X2,...,Xn` must be the same size as `V`.

`F = griddedInterpolant(V)` uses the default grid to create the interpolant. When you use this syntax, `griddedInterpolant` defines the grid as a set of points whose spacing is `1` and range is [`1`, `size(V,i)`] in the `i`th dimension. Use this syntax when you want to conserve memory and are not concerned about the absolute distances between points.

`F = griddedInterpolant({xg1,xg2,...,xgn},V)` specifies `n` grid vectors to describe an `n`-dimensional grid of sample points. Use this syntax when you want to use a specific grid and also conserve memory.

`F = griddedInterpolant( ___ ,Method)` specifies an interpolation method: `'linear'`, `'nearest'`, `'next'`, `'previous'`, `'pchip'`, `'cubic'`, or `'spline'`. You can specify `Method` as the last input argument in any of the first four syntaxes.

`F = griddedInterpolant( ___ ,Method,ExtrapolationMethod)` specifies both the interpolation and extrapolation methods. `griddedInterpolant` uses `ExtrapolationMethod` to estimate the value when your query points fall outside the domain of your sample points. Specify `Method` and `ExtrapolationMethod` together as the last two input arguments in any of the first four syntaxes.

Input Arguments

`x` — Sample points

vector

Sample points, specified as a vector. `x` and `v` must be the same size. The sample points in `x` must be unique.

Data Types: `single` | `double`

`v` — Sample values

vector

Sample values, specified as a vector. `x` and `v` must be the same size.

Data Types: `single` | `double`

`X1, X2, Xn` — Sample points in full grid form

arrays

Sample points in full grid form, specified as separate `n`-dimensional arrays. The sample points must be unique and sorted. You can create the arrays `X1,X2,...,Xn` using the `ndgrid` function. These arrays are all the same size, and each one is the same size as `V`.

Data Types: `single` | `double`

`{xg1,xg2,...,xgn}` — Sample points in grid vector form

cell array of grid vectors

Sample points in grid vector form, specified as a cell array of grid vectors. The sample points must be unique and sorted. These vectors must specify a grid that is the same size as `V`. In other words, `size(V) = [length(xg1) length(xg2),...,length(xgn)]`. Use this form as an alternative to the full grid to save memory when your grid is very large.

Data Types: `single` | `double`

`V` — Sample values

array

Sample values, specified as an array. The elements of `V` are the values that correspond to the sample points. The size of `V` must be the size of the full grid of sample points.

- If you specify the sample points as a full grid consisting of N-D arrays, then `V` must be the same size as any one of `X1,X2,...,Xn`.
- If you specify the sample points as grid vectors, then `size(V) = [length(xg1) length(xg2) ... length(xgn)]`.

Data Types: `single` | `double`

`Method` — Interpolation method

`'linear'` (default) | `'nearest'` | `'next'` | `'previous'` | `'pchip'` | `'cubic'` | `'spline'`

Interpolation method, specified as one of the options in this table.

Method	Description	Continuity	Comments
`'linear'` (default)	Linear interpolation. The interpolated value at a query point is based on linear interpolation of the values at neighboring grid points in each respective dimension.	C^0	• Requires at least 2 grid points in each dimension. • Requires more memory than `'nearest'`.
`'nearest'`	Nearest neighbor interpolation. The interpolated value at a query point is the value at the nearest sample grid point.	Discontinuous	• Requires 2 grid points in each dimension. • Fastest computation with modest memory requirements.

Method	Description	Continuity	Comments
`'next'`	Next neighbor interpolation (for 1-D only). The interpolated value at a query point is the value at the next sample grid point.	Discontinuous	• Requires at least 2 points. • Same memory requirements and computation time as `'nearest'`.
`'previous'`	Previous neighbor interpolation (for 1-D only). The interpolated value at a query point is the value at the previous sample grid point.	Discontinuous	• Requires at least 2 points. • Same memory requirements and computation time as `'nearest'`.
`'pchip'`	Shape-preserving piecewise cubic interpolation (for 1-D only). The interpolated value at a query point is based on a shape-preserving piecewise cubic interpolation of the values at neighboring grid points.	C^1	• Requires at least 4 points. • Requires more memory and computation time than `'linear'`.
`'cubic'`	Cubic interpolation. The interpolated value at a query point is based on a cubic interpolation of the values at neighboring grid points in each respective dimension. The interpolation is based on a cubic convolution.	C^1	• Grid must have uniform spacing, although the spacing in each dimension does not have to be the same. • Requires at least 4 points in each dimension. • Requires more memory and computation time than `'linear'`.
`'spline'`	Cubic spline interpolation. The interpolated value at a query point is based on a cubic interpolation of the values at neighboring grid points in each respective dimension. The interpolation is based on a cubic spline using not-a-knot end conditions.	C^2	• Requires 4 points in each dimension. • Requires more memory and computation time than `'cubic'`.

`ExtrapolationMethod` — Extrapolation method
`'linear'` (default) | `'nearest'` | `'next'` | `'previous'` | `'pchip'` | `'cubic'` | `'spline'` | `'none'`

Extrapolation method, specified as `'linear'`, `'nearest'`, `'next'`, `'previous'`, `'pchip'`, `'cubic'`, or `'spline'`. In addition, you can specify `'none'` if you want queries outside the domain of your grid to return `NaN` values.

If you omit `ExtrapolationMethod`, the default is the value you specify for `Method`. If you omit both the `Method` and `ExtrapolationMethod` arguments, both values default to `'linear'`.

Evaluate Interpolant at Specific Points

Use `griddedInterpolant` to create the interpolant, `F`. Then you can evaluate `F` at specific points using any of the following syntaxes:

- `Vq = F(Xq)` specifies the query points in the matrix `Xq`. Each row of `Xq` contains the coordinates of a query point.
- `Vq = F(xq1,xq2,...,xqn)` specifies the query points `xq1,xq2,...,xqn` as column vectors of length `m` representing `m` points scattered in `n`-dimensional space.
- `Vq = F(Xq1,Xq2,...,Xqn)` specifies the query points using the `n`-dimensional arrays `Xq1,Xq2,...,Xqn`, which define a full grid of points.
- `Vq = F({xgq1,xgq2,...,xgqn})` specifies the query points as grid vectors. Use this syntax to conserve memory when you want to query a large grid of points.

Properties

`GridVectors` — Grid vectors
cell array

Grid vectors, specified as a cell array `{xg1,xg2,...,xgn}`. These vectors specify the grid points (locations) for the values in `F.Values`. The grid points must be unique.

Index-based editing of the properties of `F` is not supported. Instead, completely replace the `GridVectors` or `Values` arrays as necessary.

Data Types: `cell`

`Values` — Function values at sample points
array

Function values at sample points, specified as an array of values associated with the grid points in `F.GridVectors`.

Index-based editing of the properties of `F` is not supported. Instead, completely replace the `GridVectors` or `Values` arrays as necessary.

Data Types: `single` | `double`

`Method` — Interpolation method
`'linear'` (default) | `'nearest'` | `'next'` | `'previous'` | `'pchip'` | `'cubic'` | `'spline'`

Interpolation method, specified as a character vector. `Method` can be: `'linear'`, `'nearest'`, `'next'`, `'previous'`, `'pchip'`, `'cubic'`, or `'spline'`.

Data Types: `char`

`ExtrapolationMethod` — Extrapolation method
`'linear'` | `'nearest'` | `'next'` | `'previous'` | `'pchip'` | `'cubic'` | `'spline'` | `'none'`

Extrapolation method, specified as a character vector. `ExtrapolationMethod` can be: `'linear'`, `'nearest'`, `'next'`, `'previous'`, `'pchip'`, `'cubic'`, `'spline'`, or `'none'`. A value of `'none'` indicates that extrapolation is disabled. The default value is the value of `F.Method`.

Data Types: `char`

Examples

1-D Interpolation

Use `griddedInterpolant` to interpolate a 1-D data set.

Create a vector of scattered sample points `v`. The points are sampled at random 1-D locations between 0 and 20.

```
x = sort(20*rand(100,1));
v = besselj(0,x);
```

Create a gridded interpolant object for the data. By default, `griddedInterpolant` uses the `'linear'` interpolation method.

```
F = griddedInterpolant(x,v)
```

```
F =
  griddedInterpolant with properties:

            GridVectors: {[100×1 double]}
                 Values: [100×1 double]
                 Method: 'linear'
    ExtrapolationMethod: 'linear'
```

Query the interpolant `F` at 500 uniformly spaced points between 0 and 20. Plot the interpolated results `(xq,vq)` on top of the original data `(x,v)`.

```
xq = linspace(0,20,500);
vq = F(xq);
plot(x,v,'ro')
hold on
plot(xq,vq,'.')
legend('Sample Points','Interpolated Values')
```

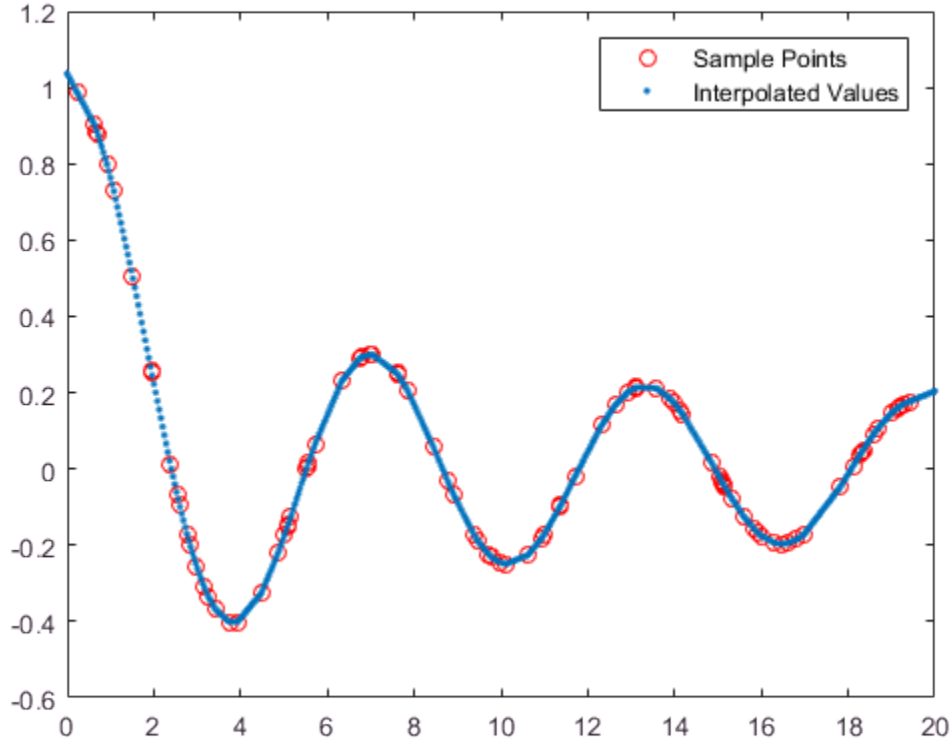

3-D Interpolation Using Full Grid vs. Grid Vectors

Interpolate 3-D data using two methods to specify the query points.

Create and plot a 3-D data set representing the function $z(x, y) = \frac{\sin(x^2 + y^2)}{x^2 + y^2}$ evaluated at a set of gridded sample points in the range [-5,5].

```
[x,y] = ndgrid(-5:0.8:5);
z = sin(x.^2 + y.^2) ./ (x.^2 + y.^2);
surf(x,y,z)
```

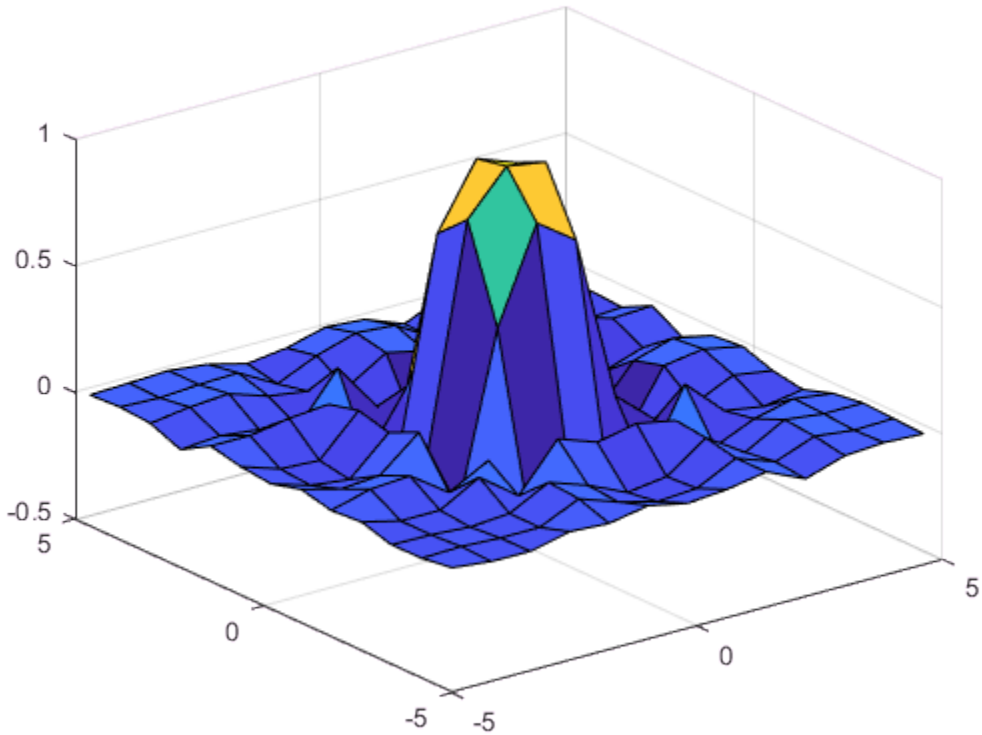

Create a gridded interpolant object for the data.

```
F = griddedInterpolant(x,y,z);
```

Use a finer mesh to query the interpolant and improve the resolution.

```
[xq,yq] = ndgrid(-5:0.1:5);
vq = F(xq,yq);
surf(xq,yq,vq)
```

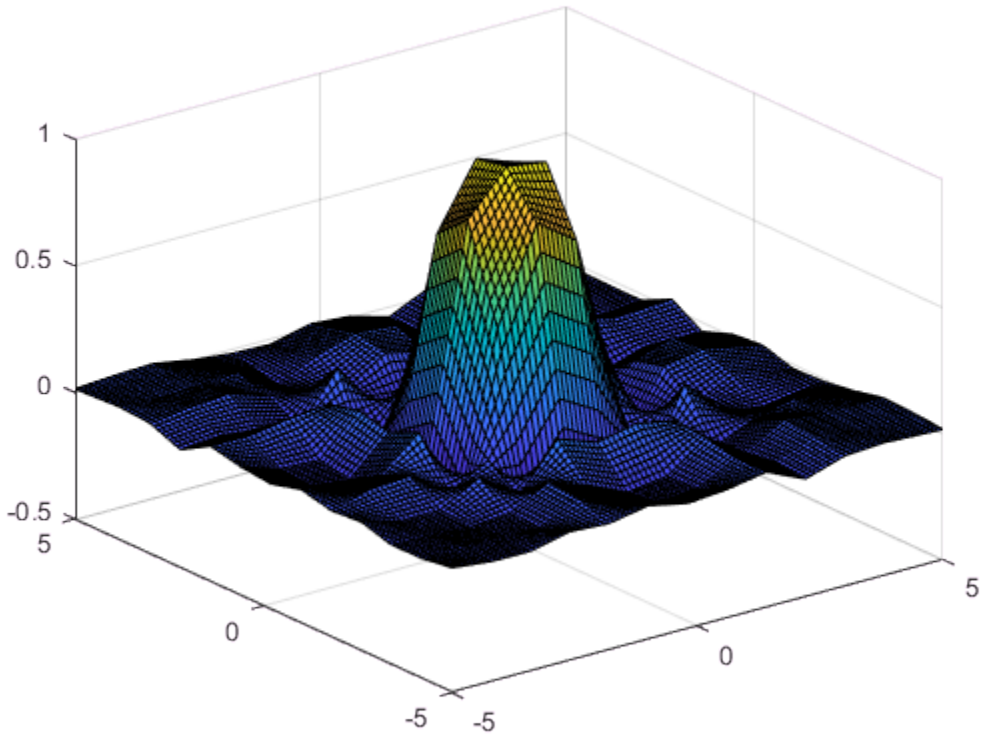

In cases where there are a lot of sample points or query points, and where memory usage becomes a concern, you can use *grid vectors* to improve memory usage.

- When you specify grid vectors instead of using `ndgrid` to create the full grid, `griddedInterpolant` avoids forming the full query grid to carry out the calculations.
- When you pass grid vectors, they are normally grouped together as cells in a cell array, `{xg1, xg2, ..., xgn}`. The grid vectors are a compact way to represent the points of the full grid.

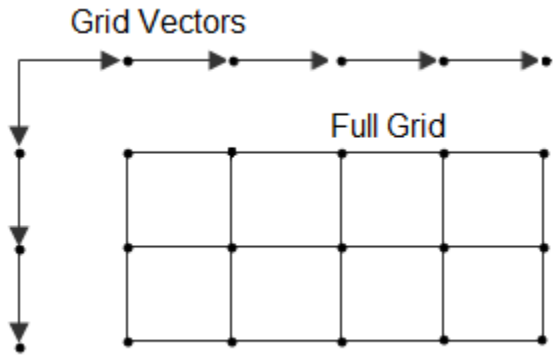

Alternatively, execute the previous commands using grid vectors.

```
x = -5:0.8:5;
y = x';
z = sin(x.^2 + y.^2) ./ (x.^2 + y.^2);
F = griddedInterpolant({x,y},z);
xq = -5:0.1:5;
yq = xq';
vq = F({xq,yq});
surf(xq,yq,vq)
```

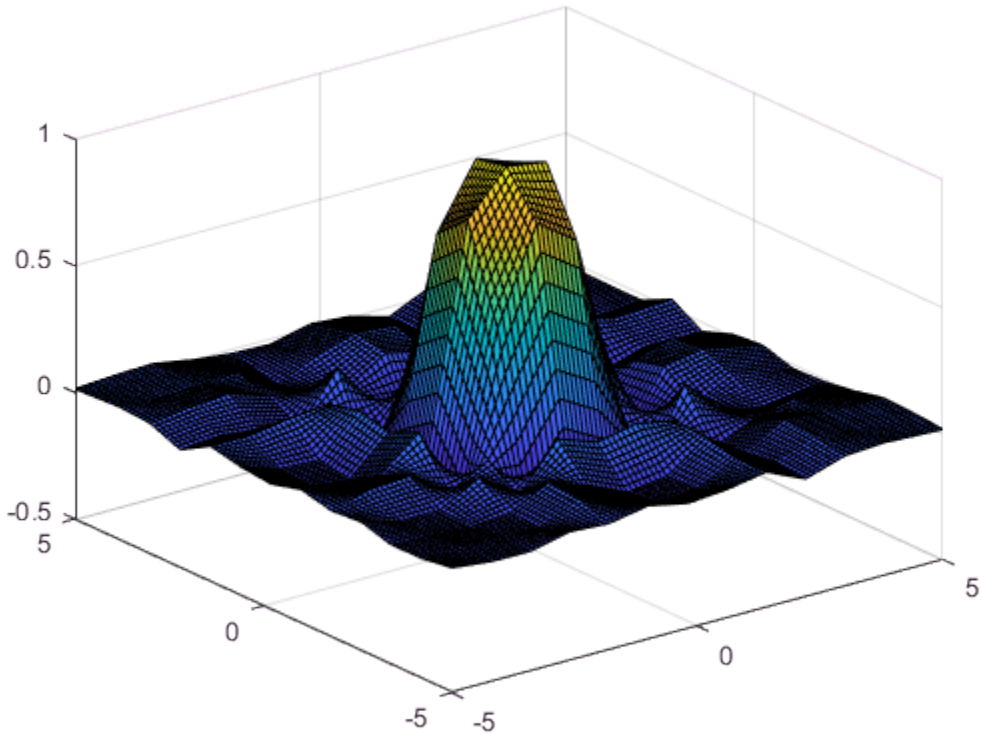

Interpolation with Default Grid

Use the default grid to perform a quick interpolation on a set of sample points. The default grid uses unit-spaced points, so this interpolation is useful when the exact *xy* spacing between the sample points is not important.

Create a matrix of sample function values and plot them against the default grid.

```
x = (1:0.3:5)';
y = x';
V = cos(x) .* sin(y);
n = length(x);
surf(1:n,1:n,V)
```

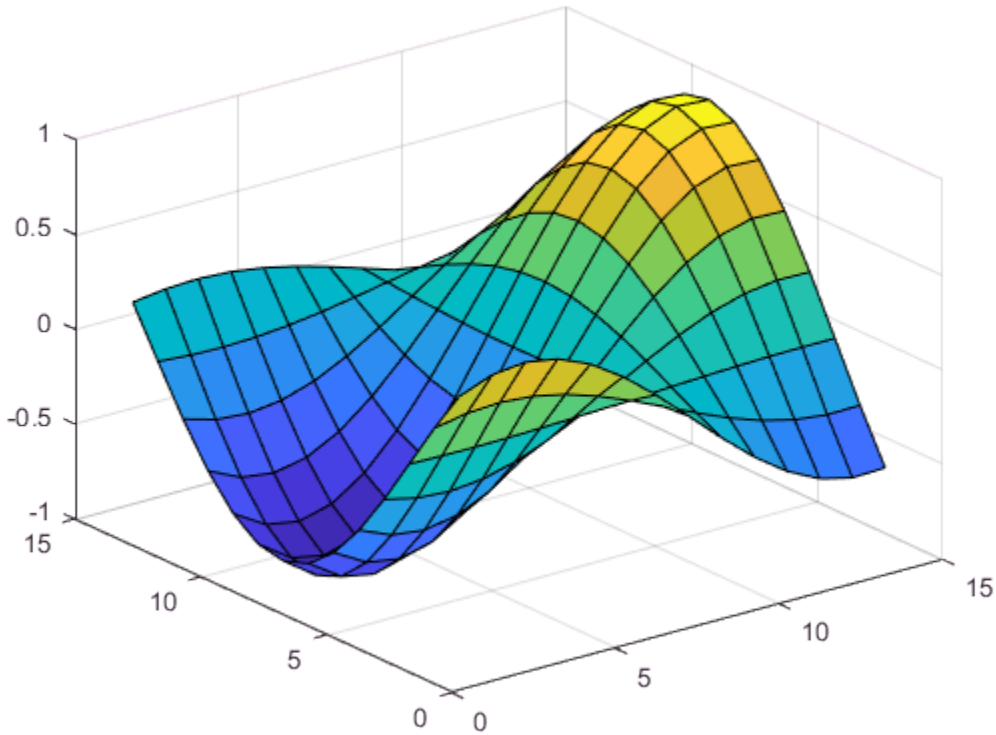

Interpolate the data using the default grid.

```
F = griddedInterpolant(V)
```

```
F =
  griddedInterpolant with properties:

            GridVectors: {[1 2 3 4 5 6 7 8 9 10 11 12 13 14]  [1 2 3 4 5 6 7 8 9 10 11
                 Values: [14×14 double]
                 Method: 'linear'
    ExtrapolationMethod: 'linear'
```

Query the interpolant and plot the results.

```
[xq,yq] = ndgrid(1:0.2:n);
Vq = F(xq,yq);
surf(xq',yq',Vq)
```

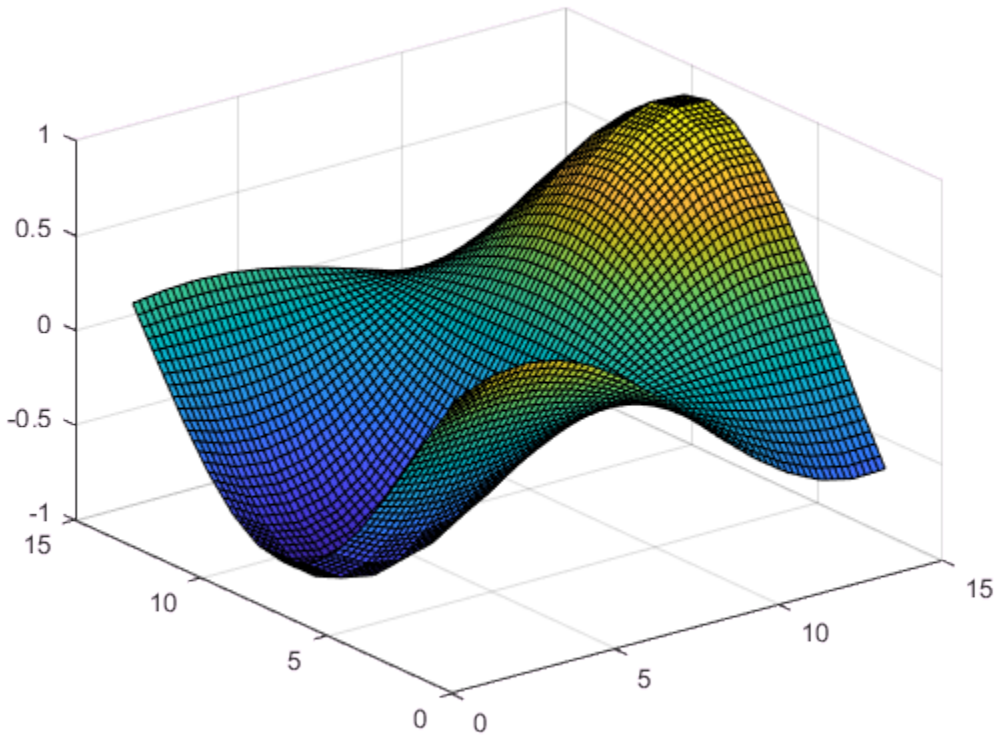

2-D Interpolation Over Finer Grid

Interpolate coarsely sampled data using a full grid with spacing of `0.5`.

Define the sample points as a full grid with range [1, 10] in both dimensions.

```
[X,Y] = ndgrid(1:10,1:10);
```

Sample $f(x, y) = x^2 + y^2$ at the grid points.

```
V = X.^2 + Y.^2;
```

Create the interpolant, specifying cubic interpolation.

```
F = griddedInterpolant(X,Y,V,'cubic');
```

Define a full grid of query points with `0.5` spacing and evaluate the interpolant at those points. Then plot the result.

```
[Xq,Yq] = ndgrid(1:0.5:10,1:0.5:10);
Vq = F(Xq,Yq);
mesh(Xq,Yq,Vq);
```

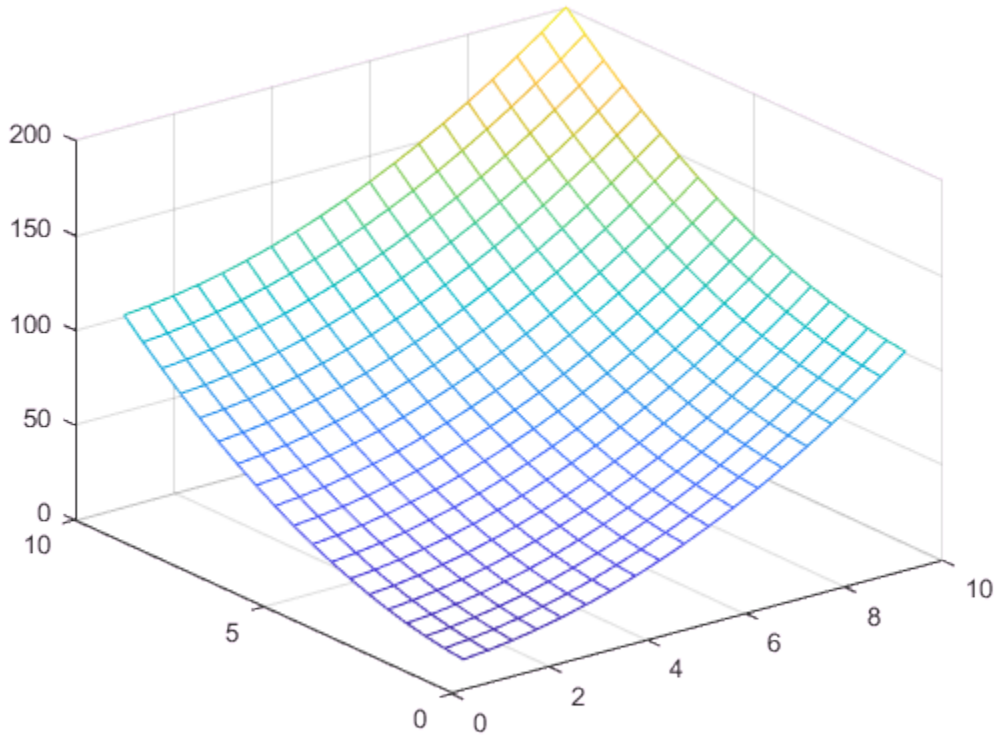

1-D Extrapolation

Compare results of querying the interpolant outside the domain of F using the 'pchip' and 'nearest' extrapolation methods.

Create the interpolant, specifying 'pchip' as the interpolation method and 'nearest' as the extrapolation method.

```
x = [1 2 3 4 5];
v = [12 16 31 10 6];
F = griddedInterpolant(x,v,'pchip','nearest')
```

```
F =
  griddedInterpolant with properties:

            GridVectors: {[1 2 3 4 5]}
                 Values: [12 16 31 10 6]
                 Method: 'pchip'
    ExtrapolationMethod: 'nearest'
```

Query the interpolant, and include points outside the domain of F.

```
xq = 0:0.1:6;
vq = F(xq);
figure
plot(x,v,'o',xq,vq,'-b');
legend ('v','vq')
```

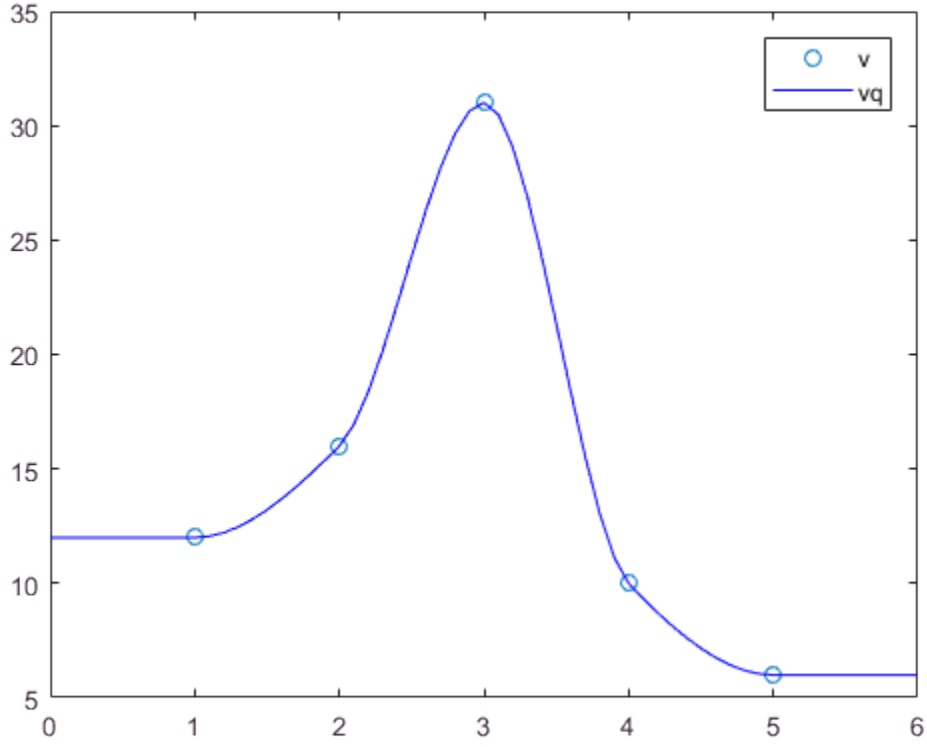

Query the interpolant at the same points again, this time using the pchip extrapolation method.

```
F.ExtrapolationMethod = 'pchip';
figure
vq = F(xq);
plot(x,v,'o',xq,vq,'-b');
legend ('v','vq')
```

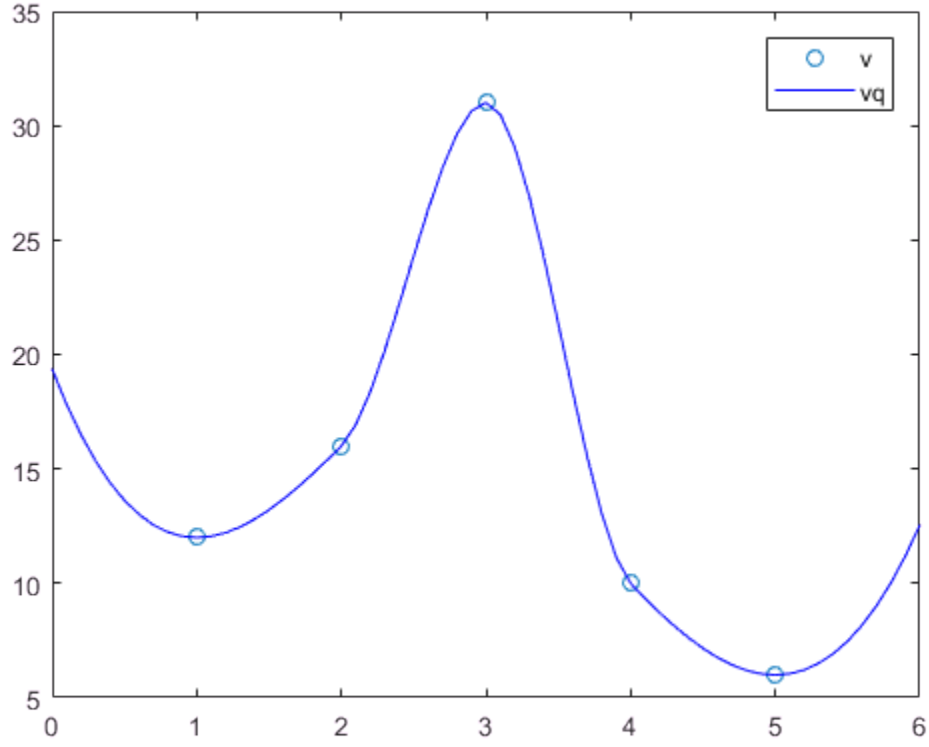

- "Resample Image with Gridded Interpolation"

Definitions

Interpolant

Interpolating function that you can evaluate at query points.

Gridded Data

A set of points that are axis-aligned and ordered.

Scattered Data

A set of points that have no structure among their relative locations.

Full Grid

A grid represented as a set of arrays. For example, you can create a full grid using `ndgrid`.

Grid Vectors

A set of vectors that serve as a compact representation of a grid in `ndgrid` format.

For example, `[X,Y] = ndgrid(xg,yg)` returns a full grid in the matrices `X` and `Y`. You can represent the same grid using the grid vectors `xg` and `yg`.

Tips

- It is quicker to evaluate a `griddedInterpolant` object `F` at many different sets of query points than it is to compute the interpolations separately using `interp1`, `interp2`, `interp3`, or `interpn`. For example:

```
% Fast to create interpolant F and evaluate multiple times
F = griddedInterpolant(X1,X2,V)
v1 = F(Xq1)
v2 = F(Xq2)

% Slower to compute interpolations separately using interp2
v1 = interp2(X1,X2,V,Xq1)
v2 = interp2(X1,X2,V,Xq2)
```

See Also

See Also

`fillmissing` | `filloutliers` | `interp1` | `interp2` | `interp3` | `interpn` | `meshgrid` | `ndgrid` | `scatteredInterpolant`

Topics

"Resample Image with Gridded Interpolation"
"Interpolating Gridded Data"

Introduced in R2011b

groot

Graphics root object

Syntax

```
groot
r = groot
```

Description

`groot` refers to the graphics root object. Use `groot` to access root properties. For a list of properties, see Root Properties.

`r = groot` stores the graphics root object handle. To set root properties using dot notation, you must store the handle first.

Examples

View Root Property Values

View a list of graphics root properties and their current values.

```
get(groot)
```

```
         CallbackObject: [0×0 GraphicsPlaceholder]
               Children: [0×0 GraphicsPlaceholder]
          CurrentFigure: [0×0 GraphicsPlaceholder]
     FixedWidthFontName: 'Courier New'
       HandleVisibility: 'on'
       MonitorPositions: [1 1 1280 1024]
                 Parent: [0×0 GraphicsPlaceholder]
         PointerLocation: [1 1]
             ScreenDepth: 32
    ScreenPixelsPerInch: 96
             ScreenSize: [1 1 1280 1024]
      ShowHiddenHandles: 'off'
```

```
                 Tag: ''
                Type: 'root'
               Units: 'pixels'
            UserData: []
```

Set Root Property Values

Set graphics root property values by storing the object handle and using dot notation.

```
r = groot;
r.ShowHiddenHandles = 'on';
```

Tips

- Use the graphics root object to set default values on the root level for other types of objects. For example, set the default colormap for all future figures to the `summer` colormap.

  ```
  set(groot,'DefaultFigureColormap',summer)
  ```
  To restore a property to its original MATLAB default, use the `'remove'` keyword.

  ```
  set(groot,'DefaultFigureColormap','remove')
  ```
  For more information on setting default values, see “Default Property Values”.

See Also

See Also

Functions
`gca` | `gcf`

Properties
Root Properties

Introduced in R2014b

gsvd

Generalized singular value decomposition

Syntax

```
[U,V,X,C,S] = gsvd(A,B)
[U,V,X,C,S] = gsvd(A,B,0)
sigma = gsvd(A,B)
```

Description

`[U,V,X,C,S] = gsvd(A,B)` returns unitary matrices `U` and `V`, a (usually) square matrix `X`, and nonnegative diagonal matrices `C` and `S` so that

```
A = U*C*X'
B = V*S*X'
C'*C + S'*S = I
```

`A` and `B` must have the same number of columns, but may have different numbers of rows. If `A` is `m`-by-`p` and `B` is `n`-by-`p`, then `U` is `m`-by-`m`, `V` is `n`-by-`n`, `X` is `p`-by-`q`, `C` is `m`-by-`q` and `S` is `n`-by-`q`, where `q = min(m+n,p)`.

The nonzero elements of `S` are always on its main diagonal. The nonzero elements of `C` are on the diagonal `diag(C,max(0,q-m))`. If `m >= q`, this is the main diagonal of `C`.

`[U,V,X,C,S] = gsvd(A,B,0)`, where `A` is `m`-by-`p` and `B` is `n`-by-`p`, produces the "economy-sized" decomposition where the resulting `U` and `V` have at most `p` columns, and `C` and `S` have at most `p` rows. The generalized singular values are `diag(C)./diag(S)` so long as `m >= p` and `n >= p`.

If `A` is `m`-by-`p` and `B` is `n`-by-`p`, then `U` is `m`-by-`min(q,m)`, `V` is `n`-by-`min(q,n)`, `X` is `p`-by-`q`, `C` is `min(q,m)`-by-`q` and `S` is `min(q,n)`-by-`q`, where `q = min(m+n,p)`.

`sigma = gsvd(A,B)` returns the vector of generalized singular values, `sqrt(diag(C'*C)./diag(S'*S))`. When `B` is square and nonsingular, the generalized singular values, `gsvd(A,B)`, correspond to the ordinary singular values, `svd(A/B)`, but they are sorted in the opposite order. Their reciprocals are `gsvd(B,A)`.

The vector `sigma` has length `q` and is in non-decreasing order.

Examples

Example 1

The matrices have at least as many rows as columns.

```
A = reshape(1:15,5,3)
B = magic(3)
A =
         1     6    11
         2     7    12
         3     8    13
         4     9    14
         5    10    15
B =
         8     1     6
         3     5     7
         4     9     2
```

The statement

```
[U,V,X,C,S] = gsvd(A,B)
```

produces a 5-by-5 orthogonal `U`, a 3-by-3 orthogonal `V`, a 3-by-3 nonsingular `X`,

```
X =
        2.8284   -9.3761   -6.9346
       -5.6569   -8.3071  -18.3301
        2.8284   -7.2381  -29.7256
```

and

```
C =
        0.0000         0         0
             0    0.3155         0
             0         0    0.9807
             0         0         0
             0         0         0
S =
        1.0000         0         0
             0    0.9489         0
```

```
             0         0    0.1957
```

Since A is rank deficient, the first diagonal element of C is zero.

The economy sized decomposition,

```
[U,V,X,C,S] = gsvd(A,B,0)
```

produces a 5-by-3 matrix U and a 3-by-3 matrix C.

```
U =
        0.5700   -0.6457   -0.4279
       -0.7455   -0.3296   -0.4375
       -0.1702   -0.0135   -0.4470
        0.2966    0.3026   -0.4566
        0.0490    0.6187   -0.4661

C =
        0.0000         0         0
             0    0.3155         0
             0         0    0.9807
```

The other three matrices, V, X, and S are the same as those obtained with the full decomposition.

The generalized singular values are the ratios of the diagonal elements of C and S.

```
sigma = gsvd(A,B)
sigma =
        0.0000
        0.3325
        5.0123
```

These values are a reordering of the ordinary singular values

```
svd(A/B)
ans =
        5.0123
        0.3325
        0.0000
```

Example 2

The matrices have at least as many columns as rows.

```
A = reshape(1:15,3,5)
B = magic(5)
A =

     1     4     7    10    13
     2     5     8    11    14
     3     6     9    12    15

B =

    17    24     1     8    15
    23     5     7    14    16
     4     6    13    20    22
    10    12    19    21     3
    11    18    25     2     9
```

The statement

```
[U,V,X,C,S] = gsvd(A,B)
```

produces a 3-by-3 orthogonal `U`, a 5-by-5 orthogonal `V`, a 5-by-5 nonsingular `X` and

```
C =

         0         0    0.0000         0         0
         0         0         0    0.0439         0
         0         0         0         0    0.7432

S =

    1.0000         0         0         0         0
         0    1.0000         0         0         0
         0         0    1.0000         0         0
         0         0         0    0.9990         0
         0         0         0         0    0.6690
```

In this situation, the nonzero diagonal of `C` is `diag(C,2)`. The generalized singular values include three zeros.

```
sigma = gsvd(A,B)
sigma =

         0
         0
    0.0000
```

```
    0.0439
    1.1109
```

Reversing the roles of A and B reciprocates these values, producing two infinities.

```
gsvd(B,A)
ans =

   1.0e+16 *

    0.0000
    0.0000
    8.8252
       Inf
       Inf
```

Tips

- In this formulation of the gsvd, no assumptions are made about the individual ranks of A or B. The matrix X has full rank if and only if the matrix [A;B] has full rank. In fact, svd(X) and cond(X) are equal to svd([A;B]) and cond([A;B]). Other formulations, eg. G. Golub and C. Van Loan [1], require that null(A) and null(B) do not overlap and replace X by inv(X) or inv(X').

  Note, however, that when null(A) and null(B) do overlap, the nonzero elements of C and S are not uniquely determined.

Algorithms

The generalized singular value decomposition uses the C-S decomposition described in [1], as well as the built-in svd and qr functions. The C-S decomposition is implemented in a local function in the gsvd program file.

References

[1] Golub, Gene H. and Charles Van Loan, *Matrix Computations*, Third Edition, Johns Hopkins University Press, Baltimore, 1996

See Also

`qr` | `svd`

Introduced before R2006a

gt, >

Determine greater than

Syntax

```
A > B
gt(A,B)
```

Description

`A > B` returns a logical array with elements set to logical 1 (`true`) where `A` is greater than `B`; otherwise, the element is logical `0` (`false`). The test compares only the real part of numeric arrays. `gt` returns logical `0` (`false`) where `A` or `B` have NaN or undefined categorical elements.

`gt(A,B)` is an alternate way to execute `A > B`, but is rarely used. It enables operator overloading for classes.

Examples

Test Vector Elements

Determine if vector elements are greater than a given value.

Create a numeric vector.

```
A = [1 12 18 7 9 11 2 15];
```

Test the vector for elements that are greater than `10`.

```
A > 10
```

```
ans = 1×8 logical array
   0   1   1   0   0   1   0   1
```

The result is a vector with values of logical `1` (`true`) where the elements of `A` satisfy the expression.

Use the vector of logical values as an index to view the values in A that are greater than 10.

```
A(A > 10)
```

```
ans =

    12    18    11    15
```

The result is a subset of the elements in A.

Replace Elements of Matrix

Create a matrix.

```
A = magic(4)
```

```
A =

    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1
```

Replace all values greater than 9 with the value 10.

```
A(A > 9) = 10
```

```
A =

    10     2     3    10
     5    10    10     8
     9     7     6    10
     4    10    10     1
```

The result is a new matrix whose largest element is 10.

Compare Values in Categorical Array

Create an ordinal categorical array.

```
A = categorical({'large' 'medium' 'small'; 'medium' ...
'small' 'large'},{'small' 'medium' 'large'},'Ordinal',1)
```

```
A = 2×3 categorical array
     large       medium      small
     medium      small       large
```

The array has three categories: `'small'`, `'medium'`, and `'large'`.

Find all values greater than the category `'medium'`.

```
A > 'medium'
```

```
ans = 2×3 logical array
   1   0   0
   0   0   1
```

A value of logical `1` (`true`) indicates a value greater than the category `'medium'`.

Compare the rows of `A`.

```
A(1,:) > A(2,:)
```

```
ans = 1×3 logical array
   1   1   0
```

The function returns logical `1` (`true`) where the first row has a category value greater than the second row.

Test Complex Numbers

Create a vector of complex numbers.

```
A = [1+i 2-2i 1+3i 1-2i 5-i];
```

Find the values that are greater than `2`.

```
A(A > 2)
```

```
ans =
   5.0000 - 1.0000i
```

`gt` compares only the real part of the elements in `A`.

Use `abs` to find which elements are outside a radius of `2` from the origin.

```
A(abs(A) > 2)
```

```
ans =
   2.0000 - 2.0000i   1.0000 + 3.0000i   1.0000 - 2.0000i   5.0000 - 1.0000i
```

The result has more elements since `abs` accounts for the imaginary part of the numbers.

Compare Dates

Create a vector of dates.

```
A = datetime([2014,05,01;2014,05,31])
```

```
A = 2×1 datetime array
   01-May-2014
   31-May-2014
```

Find the dates that occur after May 10, 2014.

```
A(A > '2014-05-10')
```

```
ans = datetime
   31-May-2014
```

Input Arguments

A — Left array

scalar | vector | matrix | multidimensional array

Left array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs `A` and `B` must either be the same size or have sizes that are compatible

(for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is an ordinal categorical array, the other input can be an ordinal categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have the same sets of categories, including their order. See "Compare Categorical Array Elements" for more details.
- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.
- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

B — Right array

scalar | vector | matrix | multidimensional array

Right array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is an ordinal categorical array, the other input can be an ordinal categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have

the same sets of categories, including their order. See "Compare Categorical Array Elements" for more details.

- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.
- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`eq` | `ge` | `le` | `lt` | `ne`

Topics

"Array Comparison with Relational Operators"
"Ordinal Categorical Arrays"
"MATLAB Operators and Special Characters"

Introduced before R2006a

gtext

Add text to figure using mouse

Syntax

```
gtext(str)
gtext(str,Name,Value)

t = gtext( ___ )
```

Description

`gtext(str)` inserts the text, `str`, at the location you select with the mouse. When you hover over the figure window, the pointer becomes a crosshair. `gtext` is waiting for you to select a location. Move the pointer to the location you want and either click the figure or press any key, except **Enter**.

`gtext(str,Name,Value)` specifies text properties using one or more name-value pair arguments. For example, `'FontSize',14` specifies a 14-point font.

`t = gtext( ___ )` returns an array of text objects created by `gtext`. Use `t` to modify properties of the text objects after they are created. For a list of properties and descriptions, see Text Properties. You can return an output argument using any of the arguments from the previous syntaxes.

Examples

Add Text to Figure Using Mouse

Create a simple line plot and use `gtext` to add text to the figure using the mouse.

```
plot(1:10)
gtext('My Plot')
```

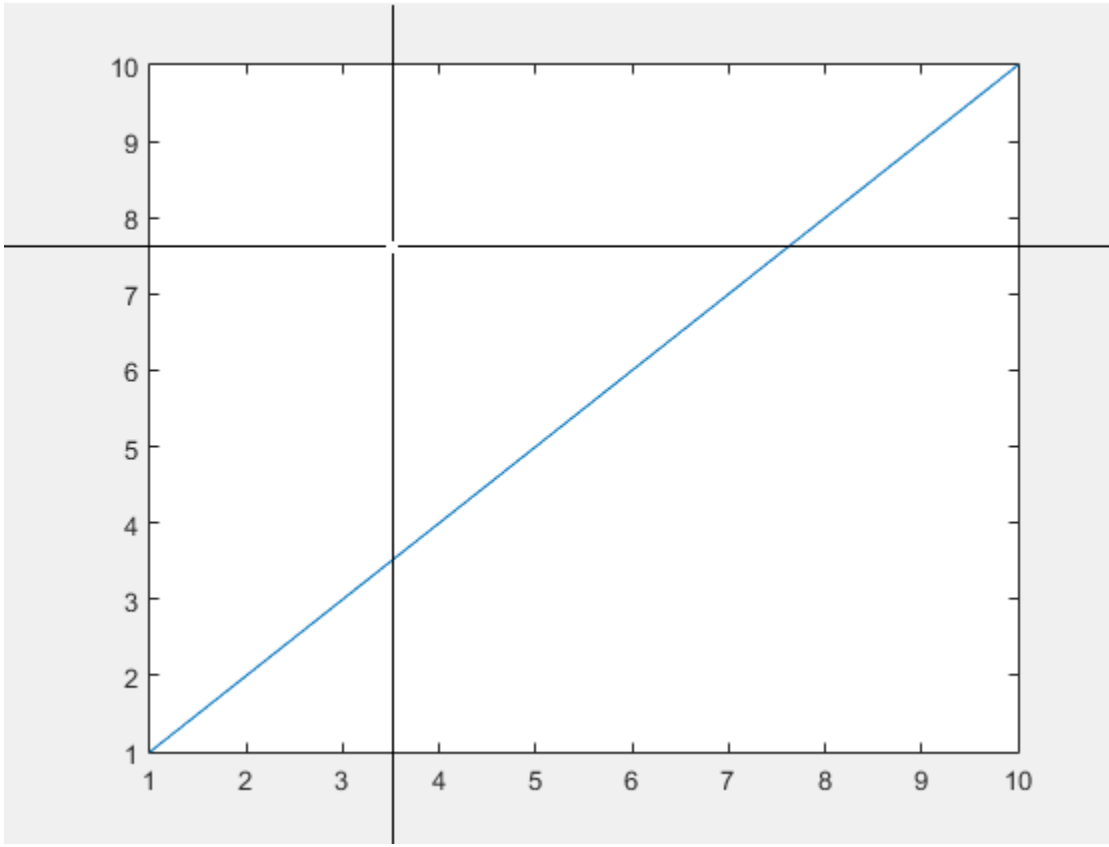

Click the figure to place the text at the selected location.

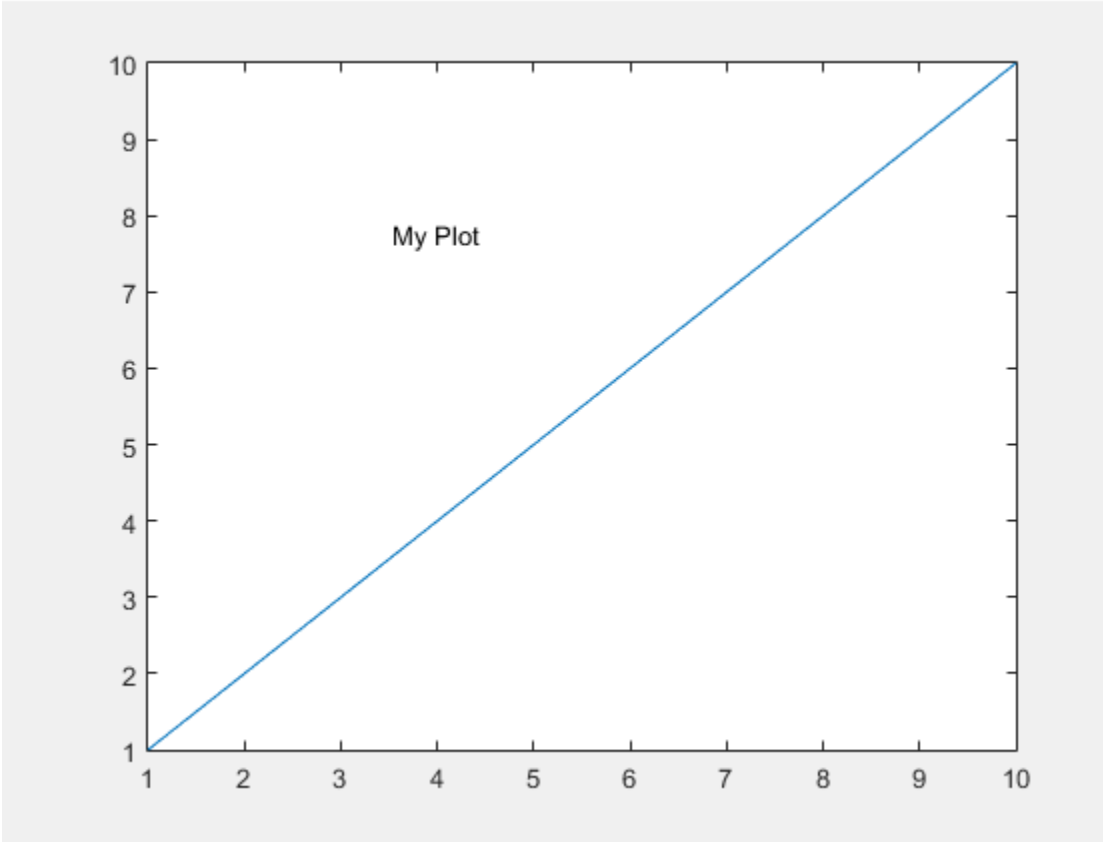

Specify Font Size and Color

Create a simple line plot and add text to the figure using the mouse. Use a red, 14-point font.

```
plot(1:10)
gtext('My Plot','Color','red','FontSize',14)
```

Click the figure where you want to display the text.

Modify Text After Creation

Create a simple line plot and add text to the figure using the mouse. Return the text object created, `t`.

```
plot(1:10)
t = gtext('My Plot')
```

Click the figure to place the text and create the text object.

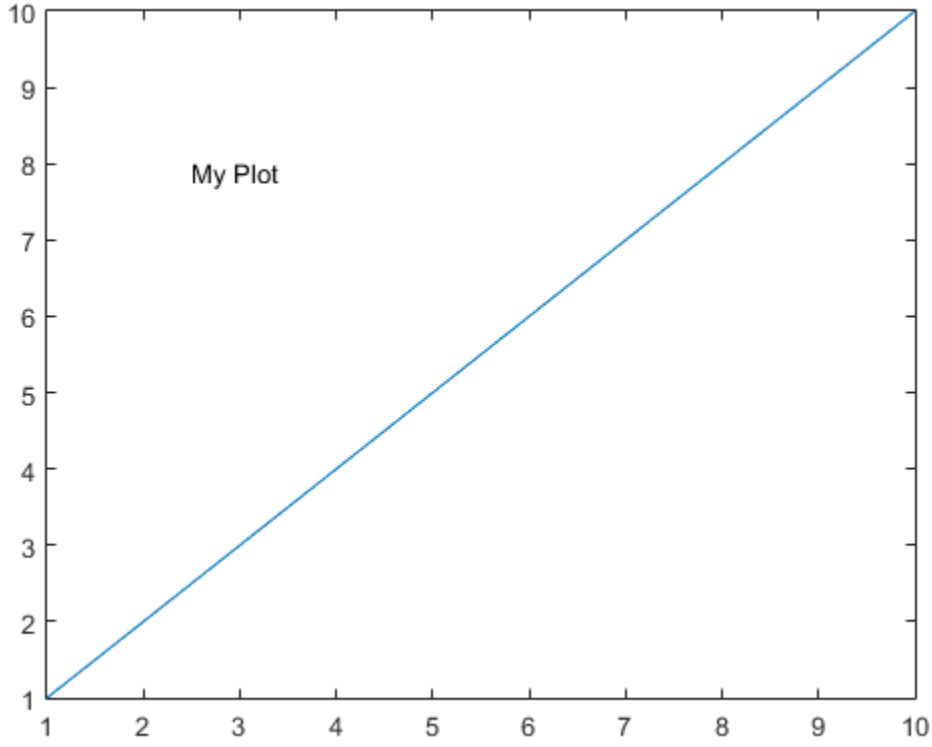


```
t =

  Text (My Plot) with properties:

                String: 'My Plot'
              FontSize: 10
            FontWeight: 'normal'
              FontName: 'Helvetica'
                 Color: [0 0 0]
  HorizontalAlignment: 'left'
              Position: [4.3906 5.3950 0]
                 Units: 'data'

  Show all properties
```

Use `t` to change the font size and color of the text by setting text properties. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the `set` function instead, such as `set(t,'Color','red')`.

```
t.Color = 'red';
t.FontSize = 14;
```

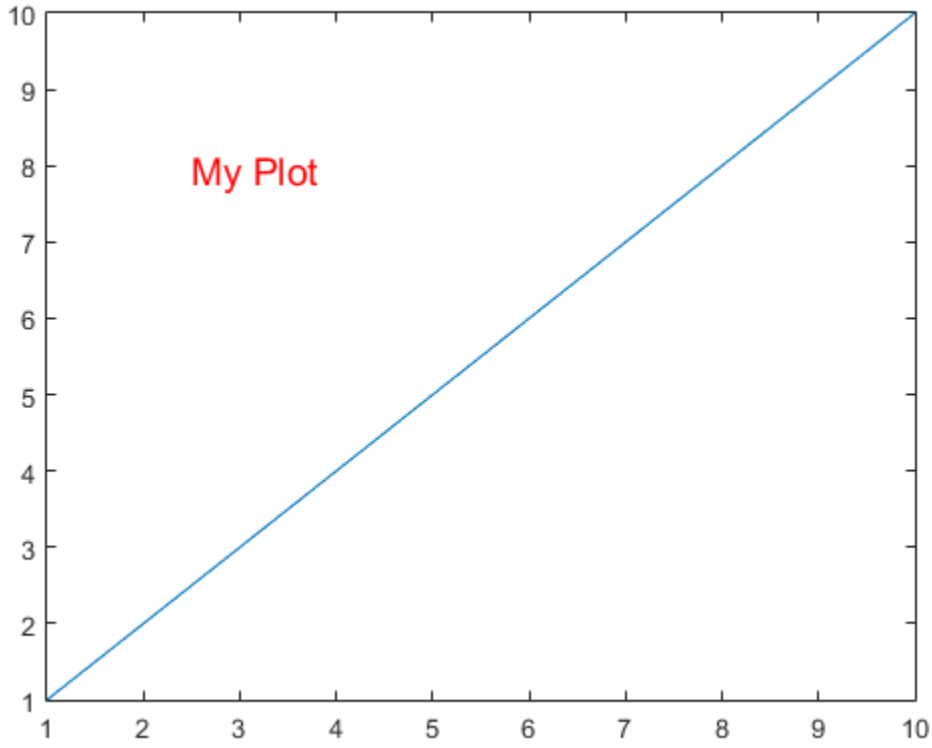

- "Add Text to Specific Points on Graph"

Input Arguments

`str` — Text to display

character vector | cell array of character vectors | character array with multiple rows

Text to display, specified in one of these forms:

- Character vector — Display the text with one click, for example:

  ```
  gtext('my text')
  ```

- Cell array of character vectors — Display one row of the array with each click. For example, this code displays `first` with the first click and `second` with the second click.

  ```
  gtext({'first';'second'})
  ```

  To display multiline text, specify more than one character vector per row.

  ```
  gtext({'first','new line';'second','new line'})
  ```

- Character array — Display one row of the array with each click. Each row must contain the same number of characters, for example:

  ```
  gtext(['one';'two'])
  ```

To include special characters, such as superscripts, subscripts, Greek letters, or mathematical symbols, use TeX markup. For a list of supported markup, see the `Interpreter` property.

Data Types: `char` | `cell`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `text(.5,.5,'my text','FontSize',14,'Color','red')`

The properties listed here are only a subset. For a full list, see Text Properties.

Note: You cannot specify the `Position` text property as a name-value pair during text creation. `gtext` ignores the specified value.

`'FontSize'` — Font size

10 (default) | scalar value greater than zero

Font size, specified as a scalar value greater than zero in point units. One point equals `1/72` inch. To change the font units, use the `FontUnits` property.

Example: `12`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'FontWeight'` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

`'FontName'` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`'Color'` — Text color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. The default color is black with an RGB triplet value of `[0 0 0]`. If you set the color to `'none'`, then the text is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'HorizontalAlignment'` — Horizontal alignment of text with respect to position point
`'left'` (default) | `'center'` | `'right'`

Horizontal alignment of the text with respect to the `x` value in the `Position` property, specified as one of the values in this table. The vertical line indicates where the `x` value lies in relation to the text.

Value	Result
`'left'` (default)	
`'center'`	

Value	Result
`'right'`	

`'Interpreter'` — Interpretation of text characters
`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of	`'\fontname{Courier} text'`

Modifier	Description	Example
	a font family. You can use this in combination with other modifiers.	
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value in point units to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Font color — Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\iota	ι	\Sigma	Σ	\rightarrow	→
\kappa	κ	\Upsilon	ϒ	\Rightarrow	⇒
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	′
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

Algorithms

`gtext` uses the `ginput` and `text` functions.

See Also

See Also

Functions
`annotation` | `ginput` | `text`

Properties
Text Properties

Topics
"Add Text to Specific Points on Graph"

Introduced before R2006a

guidata

Store or retrieve UI data

Syntax

```
guidata(object_handle,data)
data = guidata(object_handle)
```

Description

`guidata(object_handle,data)` stores the variable `data` with the object specified by `object_handle`. If `object_handle` is not a figure, then the object's parent figure is used. `data` can be any MATLAB variable, but is typically a structure, which enables you to add new fields as required.

`guidata` can manage only one variable at any time. Subsequent calls to `guidata(object_handle,data)` overwrite the previously stored `data`.

GUIDE Uses guidata GUIDE uses `guidata` to store and maintain the `handles` structure. In a GUIDE code file, do not overwrite the `handles` structure or your program will no longer work. If you need to store other data, you can do so by adding new fields to the `handles` structure.

`data = guidata(object_handle)` returns previously stored data, or an empty matrix if nothing is stored.

To change the data managed by `guidata`:

1. Get a copy of the data with the command `data = guidata(object_handle)`.
2. Make the desired changes to `data`.
3. Save the changed version of `data` with the command `guidata(object_handle,data)`.

`guidata` provides application developers with a convenient interface to a figure's application data:

- You do not need to create and maintain a hard-coded property name for the application data throughout your source code.
- You can access the data from within a local function callback routine using the component's handle (which is returned by `gcbo`), without needing to find the figure's handle.

If you are not using GUIDE, `guidata` is particularly useful in conjunction with `guihandles`, which creates a structure containing the all of the components in a UI.

Examples

This example calls `guidata` to save a structure containing a figure's application data from within the initialization section of the application code file. The first section shows how to do this within a programmatic UI. The second section shows how the code differs when you use GUIDE to create a template code file. GUIDE provides a `handles` structure as an argument to all local function callbacks, so you do not need to call `guidata` to obtain it. You do, however, need to call `guidata` to save changes you make to the structure.

Using guidata in a Programmatic UI

Calling the `guihandles` function creates the structure into which your code places additional data. It contains all handles used by the figure at the time it is called, generating field names based on each object's `Tag` property.

```
% Create figure
figure_handle = figure('Toolbar','none');
% create structure of handles
myhandles = guihandles(figure_handle);
% Add some additional data as a new field called numberOfErrors
myhandles.numberOfErrors = 0;
% Save the structure
guidata(figure_handle,myhandles)
```

You can recall the data from within a local callback function, modify it, and then replace the structure in the figure:

```
function My_Callback()
% ...
% Get the structure using guidata in the local function
myhandles = guidata(gcbo);
% Modify the value of your counter
myhandles.numberOfErrors = myhandles.numberOfErrors + 1;
```

```
% Save the change you made to the structure
guidata(gcbo,myhandles)
```

Using guidata in GUIDE

If you use GUIDE, you do not need to call `guihandles` to create a structure. You can add your own data to the `handles` structure. For example, this code adds the field, `numberOfErrors`, to the structure:

```
% --- Executes just before simple_gui_tab is made visible.
function my_GUIDE_GUI_OpeningFcn(hObject, eventdata, handles, varargin)
% This function has no output args, see OutputFcn.
% hObject    handle to figure
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)
% varargin   command line arguments to simple_gui_tab (see VARARGIN)
% ...

% add some additional data as a new field called numberOfErrors
handles.numberOfErrors = 0;
% Save the change you made to the structure
guidata(hObject,handles)
```

Notice that you use the input argument `hObject` in place of `gcbo` to refer to the object whose callback is executing.

Suppose you needed to access the `numberOfErrors` field in a push button callback. Your callback code now looks something like this:

```
% --- Executes on button press in pushbutton1.
function my_GUIDE_GUI_pushbutton1_Callback(hObject, eventdata, handles)
% hObject    handle to pushbutton1 (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)
% ...

% No need to call guidata to obtain a structure;
% it is provided by GUIDE via the handles argument
handles.numberOfErrors = handles.numberOfErrors + 1;
% save the changes to the structure
guidata(hObject,handles)
```

See Also

`guide` | `guihandles` | `getappdata` | `setappdata`

Introduced before R2006a

guide

Open GUIDE

Syntax

```
guide
guide('filename.fig')
guide('fullpath')
guide(HandleList)
```

Description

`guide` launches GUIDE, a UI design environment.

`guide` opens the GUIDE Quick Start dialog where you can choose to open a previously created or create a new one using one of the provided templates.

`guide('filename.fig')` opens the FIG-file named `filename.fig` for editing if it is on the MATLAB path.

`guide('fullpath')` opens the FIG-file at `fullpath` even if it is not on the MATLAB path.

`guide(HandleList)` opens the content of each of the figures in `HandleList` in a separate copy of the GUIDE design environment.

See Also

`inspect`

Topics

"Ways to Build Apps"
"Create a Simple App Using GUIDE"

Introduced before R2006a

guihandles

Create structure containing all child objects of `Figure`

Syntax

```
handles = guihandles(object_handle)
handles = guihandles
```

Description

`handles = guihandles(object_handle)` returns a structure containing all child objects in a `Figure`. The `object_handle` argument can be a `Figure` object or any child component of a `Figure`. Any UI or graphics components you placed in the `Figure` are listed with field names that match their Tag property.

The `handles` structure typically contains one field for every child object, but there are some exceptions:

- Objects that have an empty `Tag` property are not listed.
- Objects with hidden handles are listed.
- When multiple objects have the same `Tag` property, that field in the structure contains a vector of objects.

`handles = guihandles` returns a structure containing all child objects for the current `Figure`.

See Also

`guidata` | `guide` | `getappdata` | `setappdata`

Introduced before R2006a

gunzip

Uncompress GNU zip files

Syntax

```
gunzip(files)
gunzip(files,outputdir)
gunzip(url, ...)
filenames = gunzip(...)
```

Description

`gunzip(files)` uncompresses GNU zip files from the list of files specified in `files`. Directories recursively `gunzip` all of their content. The output files have the same name, excluding the extension `.gz`, and are written to the same directory as the input files.

`files` is a character vector or cell array of character vectors containing a list of files or directories. Individual files that are on the MATLAB path can be specified as partial path names. Otherwise, an individual file can be specified relative to the current directory or with an absolute path.

Folders must be specified relative to the current folder or with absolute paths. On UNIX systems, folders can also start with `~/` or `~username/`, which expands to the current user's home folder or the specified user's home folder, respectively. The wildcard character `*` can be used when specifying files or folders, except when relying on the MATLAB path to resolve a file name or partial path name.

`gunzip(files,outputdir)` writes the gunzipped file into the directory `outputdir`. If `outputdir` does not exist, MATLAB creates it.

`gunzip(url, ...)` extracts the GNU zip contents from an Internet universal resource locator (URL). The URL must include the protocol type (for example, `'http://'`). MATLAB downloads the URL to the temp directory, and then deletes it.

`filenames = gunzip(...)` gunzips the files and returns the relative path names of the gunzipped files in `filenames`.

Examples

To `gunzip` all `.gz` files in the current directory, type:

```
gunzip('*.gz');
```

To `gunzip` Cleve Moler's “Numerical Computing with MATLAB” examples to the output directory `ncm`, type:

```
url ='https://www.mathworks.com/content/dam/mathworks/mathworks-dot-com/moler/ncm.tar.g
gunzip(url,'ncm')
untar('ncm/ncm.tar','ncm')
```

See Also

`gzip` | `tar` | `untar` | `unzip` | `zip`

Introduced before R2006a

gzip

Compress files into GNU zip files

Syntax

```
gzip(files)
gzip(files,outputdir)
filenames = gzip(...)
```

Description

`gzip(files)` creates GNU zip files from the list of files specified in `files`. Directories recursively `gzip` all their contents. Each output gzipped file is written to the same directory as the input file and with the file extension `.gz`.

`files` is a character vector or cell array of character vectors containing a list of files or directories to `gzip`. Individual files that are on the MATLAB path can be specified as partial path names. Otherwise, an individual file can be specified relative to the current directory or with an absolute path.

Folders must be specified relative to the current folder or with absolute paths. On UNIX systems, folders can also start with `~/` or `~username/`, which expands to the current user's home folder or the specified user's home folder, respectively. The wildcard character `*` can be used when specifying files or folders, except when relying on the MATLAB path to resolve a file name or partial path name.

`gzip(files,outputdir)` writes the gzipped files into the directory `outputdir`. If `outputdir` does not exist, MATLAB creates it.

`filenames = gzip(...)` gzips the files and returns the relative path names of all gzipped files in `filenames`.

Examples

To `gzip` all `.m` and `.mat` files in the current directory and store the results in the directory `archive`, type:

```
gzip({'*.m','*.mat'},'archive');
```

See Also

gunzip | tar | untar | unzip | zip

Introduced before R2006a

h5create

Create HDF5 data set

Syntax

```
h5create(filename,datasetname,size,Name,Value)
```

Description

`h5create(filename,datasetname,size,Name,Value)` creates an HDF5 data set in the file specified by `filename`.

Input Arguments

`filename`

Character vector specifying the name of an HDF5 file. If `filename` does not already exist, `h5create` creates it, with additional options specified by one or more `Name,Value` pair arguments.

Default:

`datasetname`

Character vector specifying the name of the data set you want to create. If `datasetname` is a full path name, `h5create` creates all intermediate groups, if they don't already exist.

Default:

`size`

Array specifying the extents of the dataset. To specify an unlimited extent, set the corresponding element of `size` to `Inf`.

Default:

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'Datatype'`

Any of the following MATLAB datatypes.

`double`	`uint64`	`uint32`	`uint16`	`uint8`
`single`	`int64`	`int32`	`int16`	`int8`

Default: `double`

`'ChunkSize'`

Defines chunking layout.

Default: Not chunked

`'Deflate'`

Defines gzip compression level (0-9).

Default: 0

`'FillValue'`

Defines the fill value for numeric data sets.

Default:

`'Fletcher32'`

Turns on the Fletcher32 checksum filter.

Default: `false`

`'Shuffle'`

Turns on the Shuffle filter.

Default: `false`

Examples

Create Fixed-Size Data Set

Create a fixed-size 100-by-200 data set.

```
h5create('myfile.h5','/myDataset1',[100 200])
h5disp('myfile.h5')
```

```
HDF5 myfile.h5
Group '/'
    Dataset 'myDataset1'
        Size:  100x200
        MaxSize:  100x200
        Datatype:   H5T_IEEE_F64LE (double)
        ChunkSize:  []
        Filters:  none
        FillValue:  0.000000
```

Create Data Set with Compression

Create a single-precision 1000-by-2000 data set with a chunk size of 50-by-80. Apply the highest level of compression.

```
h5create('myfile.h5','/myDataset2',[1000 2000],'Datatype','single', ...
          'ChunkSize',[50 80],'Deflate',9)
h5disp('myfile.h5')
```

```
HDF5 myfile.h5
Group '/'
    Dataset 'myDataset2'
        Size:  1000x2000
        MaxSize:  1000x2000
        Datatype:   H5T_IEEE_F32LE (single)
        ChunkSize:  50x80
        Filters:  deflate(9)
        FillValue:  0.000000
```

Create Data Set with Unlimited Dimension

Create a two-dimensional data set that is unlimited along the second extent.

```
h5create('myfile.h5','/myDataset3',[200 Inf],'ChunkSize',[20 20])
h5disp('myfile.h5')
```

```
HDF5 myfile.h5
Group '/'
    Dataset 'myDataset3'
        Size:  200x0
        MaxSize:  200xInf
        Datatype:   H5T_IEEE_F64LE (double)
        ChunkSize:  20x20
        Filters:  none
        FillValue:  0.000000
```

Tutorials

- "Exporting to HDF5 Files"

See Also

`h5read` | `h5write` | `h5info` | `h5disp`

Topics

"Exporting to HDF5 Files"

Introduced in R2011a

h5disp

Display contents of HDF5 file

Syntax

```
h5disp(filename)
h5disp(filename,location)
h5disp(filename,location,mode)
```

Description

`h5disp(filename)` displays the structure (metadata) of the entire HDF5 file, `filename`.

`h5disp(filename,location)` displays the metadata for the specified location.

`h5disp(filename,location,mode)` displays the file metadata according to the value of `mode`.

Input Arguments

`filename`

Character vector specifying the name of an HDF5 file.

Default:

`location`

Character vector specifying the full path to a location in an HDF5 file. To display the metadata for the entire file, specify `'/'` as the value of `location`. If `location` is a group, `h5disp` displays all objects below the group.

Default:

mode

Specified as one of the following character vectors:

Value	Description
`'min'`	Minimal, display only group and data set names.
`'simple'`	Display data set metadata and attribute values, if the attribute is an integer, floating point, or a scalar string.

Default: `'simple'`

Examples

Display the entire contents of an HDF5 file.

```
h5disp('example.h5')
```

Display metadata for one data set in an HDF5 file.

```
h5disp('example.h5','/g4/world');
```

Tutorials

- "Using the High-Level HDF5 Functions to Import Data"

See Also

`h5info`

Topics

"Using the High-Level HDF5 Functions to Import Data"

Introduced in R2011a

h5info

Return information about HDF5 file

Syntax

```
info = h5info(filename)
info = h5info(filename,location)
```

Description

`info = h5info(filename)` returns information about the entire HDF5 file, specified by `filename`.

`info = h5info(filename,location)` returns information about the group, data set, or named datatype specified by `location` in the HDF5 file, `filename`.

Input Arguments

`filename`

Character vector specifying the name of an HDF5 file.

Default:

`location`

Character vector specifying the location of a group, data set, or named datatype in an HDF5 file.

Default:

Output Arguments

`info`

A structure containing information about the HDF5 file. The set of fields in the structure depends on the `location` parameter. The first field is always `'Filename'`. Other fields that might be present in the `info` structure are as follows.

Location Type	Field	Description
Files and Groups		
	`Name`	Character vector specifying name of the group. If you specify only a file name, this value is `'/'`.
	`Groups`	Array of structures describing subgroups.
	`Datasets`	Array of structures describing data sets.
	`Datatypes`	Array of structures describing named datatypes.
	`Links`	Array of structures describing soft, external, user-defined, and certain hard links.
	`Attributes`	Array of structures describing group attributes.
Data sets		
	`Name`	Character vector specifying the name of the data set.
	`Datatype`	Structure describing the datatype.
	`Dataspace`	Structure describing the size of the dataset.
	`ChunkSize`	Extents of the data set's chunk size, if defined.
	`FillValue`	Data set's fill value, if defined.
	`Filter`	Array of structures describing any defined filters such as compression.

Location Type	Field	Description
	`Attributes`	Array of structures describing data set attributes.
Named Datatypes		
	`Name`	Character vector specifying the name of the datatype object.
	`Class`	HDF5 class of the named datatype.
	`Type`	Character vector or struct further describing the datatype.
	`Size`	Size of the named datatype in bytes.

Examples

Return all information.

```
info = h5info('example.h5');
```

Return information about a group and all data sets contained within the group.

```
info = h5info('example.h5','/g4');
```

Return information about a specific dataset.

```
info = h5info('example.h5','/g4/time');
```

Tutorials

- "Using the High-Level HDF5 Functions to Import Data"

See Also

`h5disp`

Topics

"Using the High-Level HDF5 Functions to Import Data"

Introduced in R2011a

h5read

Read data from HDF5 data set

Syntax

```
data = h5read(filename,datasetname)
data = h5read(filename,datasetname,start,count)
data = h5read(filename,datasetname,start,count,stride)
```

Description

`data = h5read(filename,datasetname)` retrieves all of the data from the HDF5 data set `datasetname` in the file `filename`.

`data = h5read(filename,datasetname,start,count)` reads a subset of data from the data set `datasetname`. `start` is the one-based index of the first element to be read. `count` defines how many elements to read along each dimension. If a particular element of `count` is `Inf`, `h5read` reads data until the end of the corresponding dimension.

`data = h5read(filename,datasetname,start,count,stride)` reads a subset of data, where `stride` specifies the interelement spacing along each data set extent.

Input Arguments

`filename`

Character vector specifying the name of an HDF5 file.

Default:

`datasetname`

Character vector specifying the name of a data set in an HDF5 file.

Default:

start

Numeric index value specifying the place to start reading data in the dataset in an HDF5 file. Indices are 1-based.

Default:

count

Numeric value specifying the amount of data to read.

Default:

stride

Numeric value specifying the intervalue spacing during the read operation. For example, a spacing of 2 indicates reading every other value.

Default:

Output Arguments

data

Data read from the data set.

Examples

Read Entire Data Set

Read an entire data set from the sample file, `example.h5`.

```
h5disp('example.h5','/g4/lat')
```

```
HDF5 example.h5
Dataset 'lat'
    Size:  19
    MaxSize:  19
    Datatype:   H5T_IEEE_F64LE (double)
    ChunkSize:  []
```

```
    Filters:  none
    FillValue:  0.000000
    Attributes:
        'units':  'degrees_north'
        'CLASS':  'DIMENSION_SCALE'
        'NAME':  'lat'
```

```
data = h5read('example.h5','/g4/lat')
```

```
data =

   -90
   -80
   -70
   -60
   -50
   -40
   -30
   -20
   -10
     0
```

Read Subset of a Data Set

Read the first 5-by-3 subset of a data set.

```
h5disp('example.h5','/g4/world')
```

```
HDF5 example.h5
Dataset 'world'
    Size:  36x19
    MaxSize:  36x19
    Datatype:   H5T_IEEE_F64LE (double)
    ChunkSize:  []
    Filters:  none
    FillValue:  0.000000
```

```
data = h5read('example.h5','/g4/world',[1 1],[5 3])
```

```
data =

     0     0     0
     0     0     0
```

```
     0     0     0
     0     0     0
     0     0     0
```

Read Data Set of References

Read a data set of references to other data sets.

```
h5disp('example.h5','/g3/reference')
```

```
HDF5 example.h5
Dataset 'reference'
    Size:  2
    MaxSize:  2
    Datatype:   H5T_REFERENCE
    ChunkSize:  []
    Filters:  none
    FillValue:  H5T_REFERENCE
```

```
data = h5read('example.h5','/g3/reference')
```

```
data = 2×1 cell array
    [2×1 int32 ]
    [2×1 single]
```

Tutorials

- "Using the High-Level HDF5 Functions to Import Data"

See Also

`h5write` | `h5readatt` | `h5disp` | `h5writeatt`

Topics

"Using the High-Level HDF5 Functions to Import Data"

Introduced in R2011a

h5readatt

Read attribute from HDF5 file

Syntax

```
attval = h5readatt(filename,location,attr)
```

Description

`attval = h5readatt(filename,location,attr)` retrieves the value for the named attribute `attr` from the given `location` in the HDF5 file `filename`.

Input Arguments

`filename`

Character vector specifying the name of an HDF5 file.

Default:

`location`

Character vector specifying the full path of the attribute in an HDF5 file. `location` can refer to either a group or a data set.

Default:

`attr`

Character vector specifying the name of an attribute in an HDF5 file.

Default:

Output Arguments

`attval`

Value of the attribute.

Examples

Read Group Attribute

```
attval = h5readatt('example.h5','/','attr2')
```

```
attval = 2×2 int32 matrix

   0   2
   1   3
```

Read Data Set Attribute

Read the `units` attribute.

```
attval = h5readatt('example.h5','/g4/lon','units')
```

```
attval =
'degrees_east'
```

Tutorials

- "Using the High-Level HDF5 Functions to Import Data"

See Also

`h5writeatt` | `h5info`

Topics

"Using the High-Level HDF5 Functions to Import Data"

Introduced in R2011a

h5write

Write to HDF5 data set

Syntax

```
h5write(filename,datasetname,data)
h5write(filename,datasetname,data,start,count)
h5write(filename,datasetname,data,start,count,stride)
```

Description

`h5write(filename,datasetname,data)` writes `data` to an entire data set, `datasetname`, in the HDF5 file, `filename`.

`h5write(filename,datasetname,data,start,count)` writes a subset of the `data` to a data set, `datasetname`, in the HDF5 file, `filename`. `start` is a one-based index value that specifies the first element to be written. `count` specifies the number of elements to write along each dimension. `h5write` extends an extendable data set along any unlimited dimensions, if necessary.

`h5write(filename,datasetname,data,start,count,stride)` writes a hyperslab of data, where `stride` specifies the inter-element spacing along each dimension.

Input Arguments

`filename`

Character vector specifying the name of an HDF5 file.

Default:

`datasetname`

Character vector specifying the name of a data set in the HDF5 file.

Default:

`data`

Data to be written to the HDF5 file. You can specify only floating-point and integer data sets.

Default:

`start`

Numeric index value specifying where in the data set to start writing to the file.

Default:

`count`

Numeric value specifying how much data to write to the file.

Default:

`stride`

Numeric value specifying the interelement spacing of data to write to the file.

Default: Vector of ones.

Examples

Write to Entire Data Set

Write random values to a data set named `DS1`.

```
h5create('myfile.h5','/DS1',[10 20])
mydata = rand(10,20);
h5write('myfile.h5', '/DS1', mydata)
```

Display the contents of the file.

```
h5disp('myfile.h5')
```

```
HDF5 myfile.h5
Group '/'
    Dataset 'DS1'
        Size:  10x20
        MaxSize:  10x20
        Datatype:   H5T_IEEE_F64LE (double)
        ChunkSize:  []
        Filters:  none
        FillValue:  0.000000
```

Write to Block of Data Set

Write a hyperslab of data to the last 5-by-7 block of a data set.

```
h5create('myfile.h5','/DS2',[10 20])
mydata = rand(5,7);
h5write('myfile.h5','/DS2',mydata,[6 14],[5 7])
```

Append Data to Unlimited Data Set

```
h5create('myfile.h5','/DS3',[20 Inf],'ChunkSize',[5 5]);
for j = 1:10
      data = j*ones(20,1);
      start = [1 j];
      count = [20 1];
      h5write('myfile.h5','/DS3',data,start,count);
end
h5disp('myfile.h5');
```

```
HDF5 myfile.h5
Group '/'
    Dataset 'DS3'
        Size:  20x10
        MaxSize:  20xInf
        Datatype:   H5T_IEEE_F64LE (double)
        ChunkSize:  5x5
        Filters:  none
        FillValue:  0.000000
```

Tutorials

- "Exporting to HDF5 Files"

Limitations

- `h5write` supports only floating point and integer data sets. To write to string data sets, you must use the H5D package.

Definitions

Hyperslab

A hyperslab is a collection of points in a data space. The points can be contiguous or form a regular pattern of points or blocks in a data space.

See Also

`h5read` | `h5create` | `h5writeatt` | `h5disp` | `H5D.create` | `H5D.write`

Topics

"Exporting to HDF5 Files"

Introduced in R2011a

h5writeatt

Write HDF5 attribute

Syntax

```
h5writeatt(filename,location,attname,attvalue)
```

Description

`h5writeatt(filename,location,attname,attvalue)` writes the attribute named `attname` with the value `attvalue` to the HDF5 file `filename`. The parent object `location` can be either a group or variable. `location` is the complete path name of the group or variable to which you want to associate the attribute.

Input Arguments

`filename`

Character vector specifying the name of an HDF5 file.

Default:

`location`

Character vector specifying the full path identifying a group or variable in an HDF5 file.

Default:

`attname`

Character vector specifying the name of an attribute in an HDF5 file. If the attribute does not exist, `h5writeatt` creates the attribute with the name specified.

If the specified attribute already exists but does not have a datatype or dataspace consistent with `attvalue`, `h5writeatt` deletes the attribute and recreates it. String attributes are created with a scalar dataspace.

Default:

`attvalue`

Value to be written to the attribute in an HDF5 file.

Default:

Examples

Create a root group attribute whose value is the current time.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
h5writeatt('myfile.h5','/','creation_date',datestr(now));
```

Create a double-precision data set attribute.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
attData = [0 1 2 3];
h5writeatt('myfile.h5','/g4/world','attr',attData);
h5disp('myfile.h5','/g4/world');
```

Tutorials

- "Exporting to HDF5 Files"

See Also

`h5readatt` | `h5disp` | `h5write`

Topics

"Exporting to HDF5 Files"

Introduced in R2011a

H5.close

Close HDF5 library

Syntax

```
H5.close()
```

Description

`H5.close()` closes the HDF5 library.

See Also

See Also

`H5.open`

H5.garbage_collect

Free unused memory in HDF5 library

Syntax

```
H5.garbage_collect()
```

Description

`H5.garbage_collect()` frees unused memory in the HDF5 library.

H5.get_libversion

Version of HDF5 library

Syntax

```
[majnum,minnum,relnum] = H5.get_libversion()
```

Description

`[majnum,minnum,relnum] = H5.get_libversion()` returns the version of the HDF5 library in use.

H5.open

Open HDF5 library

Syntax

```
H5.open()
```

Description

`H5.open()` opens the HDF5 library.

See Also

See Also

`H5.close`

H5.set_free_list_limits

Set size limits on free lists

Syntax

```
H5.set_free_list_limits(reg_global_lim,reg_list_lim,arr_global_lim,arr_list_li
```

Description

`H5.set_free_list_limits(reg_global_lim,reg_list_lim,arr_global_lim,arr_list_li`
sets size limits on all types of free lists.

H5A.close

Close specified attribute

Syntax

```
H5A.close(attr_id)
```

Description

`H5A.close(attr_id)` terminates access to the attribute specified by `attr_id`, releasing the identifier.

See Also

See Also

`H5A.open`

H5A.create

Create attribute

Syntax

```
attr_id = H5A.create(loc_id,name,type_id,space_id,acpl_id)
attr_id = H5A.create(loc_id,name,type_id,space_id,acpl_id,aapl_id)
```

Description

`attr_id = H5A.create(loc_id,name,type_id,space_id,acpl_id)` creates the attribute name that is attached to the object specified by `loc_id`. `loc_id` is a group, dataset, or named datatype identifier. The datatype and dataspace identifiers of the attribute, `type_id` and `space_id`, respectively, are created with the H5T and H5S interfaces. The attribute property list, `acpl_id`, is currently unused and should be set to `'H5P_DEFAULT'`. This interface corresponds to the 1.6.x version of `H5Acreate`.

`attr_id = H5A.create(loc_id,name,type_id,space_id,acpl_id,aapl_id)` creates the attribute with the additional attribute access property list identifier `aapl_id`. `aapl_id` should currently be set to `'H5P_DEFAULT'`. This interface corresponds to the 1.8.x version of `H5Acreate`.

Examples

```
acpl_id = H5P.create('H5P_ATTRIBUTE_CREATE');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
space_id = H5S.create('H5S_SCALAR');
fid = H5F.create('myfile.h5');
attr_id = H5A.create(fid,'my_attr',type_id,space_id,acpl_id);
H5A.close(attr_id);
H5F.close(fid);
```

See Also

See Also

`H5A.close` | `H5P.create`

H5A.delete

Delete attribute

Syntax

```
H5A.delete(loc_id,name)
```

Description

`H5A.delete(loc_id,name)` removes the attribute specified by `name` from the dataset, group, or named datatype specified by `loc_id`.

Examples

Delete a root group attribute.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
fid = H5F.open('myfile.h5','H5F_ACC_RDWR','H5P_DEFAULT');
gid = H5G.open(fid,'/');
H5A.delete(gid,'attr1');
H5G.close(gid);
H5F.close(fid);
```

H5A.get_info

Information about attribute

Syntax

```
info = H5A.get_info(attr_id)
```

Description

`info = H5A.get_info(attr_id)` returns information about an attribute specified by `attr_id`.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/');
attr_id = H5A.open(gid,'attr1');
info = H5A.get_info(attr_id);
H5A.close(attr_id);
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5A.open`

H5A.get_name

Attribute name

Syntax

```
attr_name = H5A.get_name(attr_id)
```

Description

`attr_name = H5A.get_name(attr_id)` returns the name of the attribute specified by `attr_id`.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g1/g1.1');
idx_type = 'H5_INDEX_NAME';
order = 'H5_ITER_INC';
attr_id = H5A.open_by_idx(gid,'dset1.1.1',idx_type,order,0);
name = H5A.get_name(attr_id);
H5A.close(attr_id);
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5A.open_by_idx`

H5A.get_space

Copy of attribute data space

Syntax

```
dspace_id = H5A.get_space(attr_id)
```

Description

`dspace_id = H5A.get_space(attr_id)` returns a copy of the data space for the attribute specified by `attr_id`.

Examples

Retrieve the dimensions of an attribute data space.

```
fid = H5F.open('example.h5');
attr_id = H5A.open(fid,'attr2');
space = H5A.get_space(attr_id);
[~,dims] = H5S.get_simple_extent_dims(space);
H5A.close(attr_id);
H5F.close(fid);
```

See Also

See Also

`H5A.open` | `H5S.close`

H5A.get_type

Copy of attribute data type

Syntax

```
type_id = H5A.get_type(attr_id)
```

Description

`type_id = H5A.get_type(attr_id)` returns a copy of the data type for the attribute specified by `attr_id`.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/');
attr_id = H5A.open(gid,'attr1');
type_id = H5A.get_type(attr_id);
H5T.close(type_id);
H5A.close(attr_id);
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5A.open` | `H5T.close`

H5A.iterate

Execute function for attributes attached to object

Syntax

```
[status,idx_stop,cdata_out] =
H5A.iterate(obj_id,idx_type,order,idx_start,iter_func,cdata_in)
H5A.iterate(loc_id,attr_idx,iterator_func)
```

Description

`[status,idx_stop,cdata_out] = H5A.iterate(obj_id,idx_type,order,idx_start,iter_func,cdata_in)` executes the specified function `iter_func` for each attribute connected to an object. `obj_id` identifies the object to which attributes are attached. `idx_type` is the type of index and valid values include the following.

`'H5_INDEX_NAME'`	An alpha-numeric index by attribute name
`'H5_INDEX_CRT_ORDER'`	An index by creation order

`order` specifies the index traversal order. Valid values include the following.

`'H5_ITER_INC'`	Iteration from beginning to end
`'H5_ITER_DEC'`	Iteration from end to beginning
`'H5_ITER_NATIVE'`	Iteration in the fastest available order

`idx_start` specifies the starting point of the iteration. `idx_stop` returns the point at which iteration was stopped. This allows an interrupted iteration to be resumed.

The callback function, `iter_func`, must have the following signature:

```
[status,cdata_out] = iter_func(obj_id,attr_name,info,cdata_in)
```

`cdata_in` is a user-defined value or structure and is passed to the first step of the iteration in the `iter_func` `cdata_in` parameter. The `cdata_out` of an iteration step

forms the `cdata_in` for the next iteration step. Then, the final `cdata_out` at the end of the iteration is returned to the caller as `cdata_out`. This form of `H5A.iterate` corresponds to the `H5Aiterate2` function in the HDF5 C API.

`status` value returned by `iter_func` is interpreted as follows.

zero	Continues with the iteration or returns zero status value to the caller if all members have been processed
positive	Stops the iteration and returns the positive status value to the caller
negative	Stops the iteration and throws an error indicating failure

`H5A.iterate(loc_id,attr_idx,iterator_func)` executes the specified function for each attribute of the group, dataset, or named datatype specified by `loc_id`. The `attr_idx` argument specifies where the iteration begins. `iterator_func` must be a function handle.

The iterator function must have the following signature:

```
status = iterator_func(loc_id,attr_name)
```

`loc_id` still specifies the group, dataset, or named data type passed into `H5A.iterate`, and `attr_name` specifies the current attribute. This form of `H5A.iterate` corresponds to `H5Aiterate1` function in the HDF5 C API.

H5A.open

Open attribute

Syntax

```
attr_id = H5A.open(obj_id,attr_name)
attr_id = H5A.open(obj_id,attr_name,aapl_id)
```

Description

`attr_id = H5A.open(obj_id,attr_name)` opens an attribute for an object specified by a parent object identifier and attribute name.

`attr_id = H5A.open(obj_id,attr_name,aapl_id)` opens an attribute with an attribute access property list identifier, `aapl_id`. The only currently valid value for `aapl_id` is `'H5P_DEFAULT'`.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/');
attr_id = H5A.open(gid,'attr1');
H5A.close(attr_id);
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5A.close` | `H5A.open_by_idx` | `H5A.open_by_name`

H5A.open_by_idx

Open attribute specified by index

Syntax

```
attr_id = H5A.open_by_idx(loc_id,obj_name,idx_type,order,n)
attr_id =
H5A.open_by_idx(loc_id,obj_name,idx_type,order,n,aapl_id,lapl_id)
```

Description

`attr_id = H5A.open_by_idx(loc_id,obj_name,idx_type,order,n)` opens an existing attribute at index `n` attached to an object specified by its location, `loc_id`, and name, `obj_name`.

`idx_type` is the type of index and valid values include the following.

`'H5_INDEX_NAME'`	An alpha-numeric index by attribute name
`'H5_INDEX_CRT_ORDER'`	An index by creation order

`order` specifies the index traversal order. Valid values include the following.

`'H5_ITER_INC'`	Iteration from beginning to end
`'H5_ITER_DEC'`	Iteration from end to beginning
`'H5_ITER_NATIVE'`	Iteration in the fastest available order

`attr_id = H5A.open_by_idx(loc_id,obj_name,idx_type,order,n,aapl_id,lapl_id)` opens an attribute with attribute access property list, `aapl_id`, and link access property list, `lapl_id`. The `aapl_id` argument must currently be specified as `'H5P_DEFAULT'`. Also, `lapl_id` can be specified by `'H5P_DEFAULT'`.

Examples

Loop through a set of dataset attributes in reverse alphabetical order.

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g1/g1.1');
dset_id = H5D.open(fid,'/g1/g1.1/dset1.1.1');
info = H5O.get_info(dset_id);
for idx = 0:info.num_attrs-1
  attr_id =H5A.open_by_idx(gid,'dset1.1.1','H5_INDEX_NAME','H5_ITER_DEC',idx);
  fprintf('attribute name:  %s\n',H5A.get_name(attr_id));
  H5A.close(attr_id);
end
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

H5A.close | H5A.open | H5A.open_by_name

H5A.open_by_name

Open attribute specified by name

Syntax

```
attr_id = H5A.open_by_name(loc_id,obj_name,attr_name)
attr_id =
H5A.open_by_name(loc_id,obj_name,attr_name,aapl_id,lapl_id)
```

Description

`attr_id = H5A.open_by_name(loc_id,obj_name,attr_name)` opens an existing attribute `attr_name` attached to an object specified by its location `loc_id` and name `obj_name`.

`attr_id = H5A.open_by_name(loc_id,obj_name,attr_name,aapl_id,lapl_id)` opens an existing attribute with the attribute access property list `aapl_id` and link access property list `lacpl_id`. `aapl_id` must be specified as `'H5P_DEFAULT'`. `lapl_id` may also be specified by `'H5P_DEFAULT'`.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g1/g1.1');
attr_id = H5A.open_by_name(gid,'dset1.1.1','attr1');
H5A.close(attr_id);
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5A.close` | `H5A.open` | `H5A.open_by_idx`

H5A.read

Read attribute

Syntax

```
attr = H5A.read(attr_id)
attr = H5A.read(attr_id, mem_type_id)
```

Description

`attr = H5A.read(attr_id)` reads the attribute specified by `attr_id`. MATLAB will determine the appropriate memory datatype.

`attr = H5A.read(attr_id, mem_type_id)` reads the attribute specified by `attr_id`. `mem_type_id` specifies the attribute's memory datatype and should usually be given as `'H5ML_DEFAULT'`, which specifies that MATLAB will determine the appropriate memory datatype.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. If the HDF5 library reports the attribute size as 3-by-4-by-5, then the corresponding MATLAB array size is 5-by-4-by-3. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/');
attr_id = H5A.open(gid,'attr1');
data = H5A.read(attr_id);
H5A.close(attr_id);
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5A.open` | `H5A.write`

H5A.write

Write attribute

Syntax

```
H5A.write(attr_id,type_id,buf)
```

Description

`H5A.write(attr_id,type_id,buf)` writes the data in buf into the attribute specified by `attr_id`. `type_id` specifies the attribute's memory datatype. The memory datatype should be `'H5ML_DEFAULT'`, which specifies that MATLAB should determine the appropriate memory datatype.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. If the MATLAB array size is 5-by-4-by-3, then the HDF5 library should be reporting the attribute size as 3-by-4-by-5. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

Write a scalar double precision attribute.

```
acpl = H5P.create('H5P_ATTRIBUTE_CREATE');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
space_id = H5S.create('H5S_SCALAR');
fid = H5F.create('myfile.h5');
attr_id = H5A.create(fid,'my_attr',type_id,space_id,acpl);
H5A.write(attr_id,'H5ML_DEFAULT',10.0)
H5A.close(attr_id);
H5F.close(fid);
H5T.close(type_id);
```

See Also

See Also

`H5A.read`

H5D.close

Close dataset

Syntax

```
H5D.close(dataset_id)
```

Description

`H5D.close(dataset_id)` ends access to a dataset specified by `dataset_id` and releases resources used by it.

See Also

See Also

`H5D.create` | `H5D.open`

H5D.create

Create new dataset

Syntax

```
dataset_id = H5D.create(loc_id,name,type_id,space_id,plist_id)
dataset_id =
H5D.create(loc_id,name,type_id,space_id,lcpl_id,dcpl_id,dapl_id)
```

Description

`dataset_id = H5D.create(loc_id,name,type_id,space_id,plist_id)` creates the data set specified by `name` in the file or in the group specified by `loc_id`. `type_id` and `space_id` identify the datatype and dataspace, respectively. `plist_id` identifies the dataset creation property list. This interface corresponds to the `H5Dcreate1` function in the HDF5 library C 1.6 API.

`dataset_id =`
`H5D.create(loc_id,name,type_id,space_id,lcpl_id,dcpl_id,dapl_id)` creates the data set with three distinct property lists:

`lcpl_id`	link creation property list
`dcpl_id`	dataset creation property list
`dapl_id`	dataset access property list

This interface corresponds to the `H5Dcreate` function in the HDF5 library C 1.8 API.

Examples

Create a 10x5 double precision dataset with default property list settings.

```
fid = H5F.create('myfile.h5');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [10 5];
h5_dims = fliplr(dims);
```

```
h5_maxdims = h5_dims;
space_id = H5S.create_simple(2,h5_dims,h5_maxdims);
dcpl = 'H5P_DEFAULT';
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
H5S.close(space_id);
H5T.close(type_id);
H5D.close(dset_id);
H5F.close(fid);
h5disp('myfile.h5');
```

Create a 6x3 fixed length string dataset. Each string will have a length of 4 characters.

```
fid = H5F.create('myfile_strings.h5');
type_id = H5T.copy('H5T_C_S1');
H5T.set_size(type_id,4);
dims = [6 3];
h5_dims = fliplr(dims);
h5_maxdims = h5_dims;
space_id = H5S.create_simple(2,h5_dims,h5_maxdims);
dcpl = 'H5P_DEFAULT';
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
H5S.close(space_id);
H5T.close(type_id);
H5D.close(dset_id);
H5F.close(fid);
h5disp('myfile_strings.h5');
```

See Also

See Also

`H5D.close` | `H5S.close` | `H5S.create_simple` | `H5T.copy`

H5D.get_access_plist

Copy of dataset access property list

Syntax

```
plist_id = H5D.get_access_plist(dataset_id)
```

Description

`plist_id = H5D.get_access_plist(dataset_id)` returns a copy of the dataset access property list used to open the specified dataset.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g1/g1.1/dset1.1.1');
dapl = H5D.get_access_plist(dset_id);
H5P.close(dapl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5D.get_create_plist` | `H5P.close`

H5D.get_create_plist

Copy of dataset creation property list

Syntax

```
plist_id = H5D.get_create_plist(dataset_id)
```

Description

`plist_id = H5D.get_create_plist(dataset_id)` returns the identifier to a copy of the dataset creation property list for the dataset specified by `dataset_id`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g1/g1.1/dset1.1.1');
dcpl = H5D.get_create_plist(dset_id);
H5P.close(dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5D.get_access_plist` | `H5P.close`

H5D.get_offset

Location of dataset in file

Syntax

```
offset = H5D.get_offset(dataset_id)
```

Description

`offset = H5D.get_offset(dataset_id)` returns the location in the file of the dataset specified by `dataset_id`. The location is expressed as an offset, in bytes, from the beginning of the file.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g1/g1.1/dset1.1.1');
offset = H5D.get_offset(dset_id);
H5D.close(dset_id);
H5F.close(fid);
```

H5D.get_space

Copy of dataset data space

Syntax

```
dspace_id = H5D.get_space(dataset_id)
```

Description

`dspace_id = H5D.get_space(dataset_id)` returns an identifier for a copy of the data space for a dataset.

Examples

Retrieve the dimensions of an attribute data space.

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g1/g1.1/dset1.1.1');
space = H5D.get_space(dset_id);
[~,dims] = H5S.get_simple_extent_dims(space);
H5S.close(space);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5D.open` | `H5S.close`

H5D.get_space_status

Determine if space is allocated

Syntax

```
status = H5D.get_space_status(dataset_id)
```

Description

`status = H5D.get_space_status(dataset_id)` determines whether space has been allocated for the dataset specified by `dataset_id`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g1/g1.1/dset1.1.1');
status = H5D.get_space_status(dset_id);
switch(status)
    case H5ML.get_constant_value('H5D_SPACE_STATUS_NOT_ALLOCATED')
        fprintf('Not allocated.\n');
    case H5ML.get_constant_value('H5D_SPACE_STATUS_ALLOCATED')
        fprintf('Allocated.\n');
    case H5ML.get_constant_value('H5D_SPACE_STATUS_PART_ALLOCATED')
        fprintf('Part allocated.\n');
end
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5D.get_space`

H5D.get_storage_size

Determine required storage size

Syntax

```
dataset_size = H5D.get_storage_size(dataset_id)
```

Description

`dataset_size = H5D.get_storage_size(dataset_id)` returns the amount of storage that is required for the dataset specified by `dataset_id`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g1/g1.1/dset1.1.1');
dataset_size = H5D.get_storage_size(dset_id);
H5D.close(dset_id);
H5F.close(fid);
```

H5D.get_type

Copy of datatype

Syntax

```
type_id = H5D.get_type(dataset_id)
```

Description

`type_id = H5D.get_type(dataset_id)` returns an identifier for a copy of the data type for the dataset specified by `dataset_id`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g1/g1.1/dset1.1.1');
type_id = H5D.get_type(dset_id);
H5T.close(type_id);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5T.close`

H5D.open

Open specified dataset

Syntax

```
dataset_id = H5D.open(loc_id,name)
dataset_id = H5D.open(loc_id,name,dapl_id)
```

Description

`dataset_id = H5D.open(loc_id,name)` opens the dataset specified by `name` in the file or group specified by `loc_id`.

`dataset_id = H5D.open(loc_id,name,dapl_id)` opens the dataset specified by `name` in the file or group specified by `loc_id`. The dataset access property list, `dapl_id`, provides information regarding access to the dataset.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g2');
dset_id = H5D.open(gid,'dset2.2');
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5D.close`

H5D.read

Read data from HDF5 dataset

Syntax

```
data = H5D.read(dataset_id)
data =
H5D.read(dataset_id,mem_type_id,mem_space_id,file_space_id,dxpl)
```

Description

`data = H5D.read(dataset_id)` reads the entire dataset specified by `dataset_id`.

`data = H5D.read(dataset_id,mem_type_id,mem_space_id,file_space_id,dxpl)` reads the dataset specified by `dataset_id`. The `mem_type_id` input specifies the memory data type and should usually be `'H5ML_DEFAULT'` to allow MATLAB to determine the appropriate value. `mem_space_id` describes how the data is to be arranged in memory and should usually be `'H5S_ALL'`. The `file_space_id` input describes how the data is to be selected from the file. It also can be given as `'H5S_ALL'`, but this results in the entire dataset being read into memory. `dxpl` is the dataset transfer property list identifier and should usually be `'H5P_DEFAULT'`.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

Read an entire dataset.

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g1/g1.1/dset1.1.1');
data = H5D.read(dset_id);
```

```
H5D.close(dset_id);
H5F.close(fid);
```

Read the 2x3 hyperslab starting in the 4th row and 5th column of the example dataset.

```
plist = 'H5P_DEFAULT';
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g1/g1.1/dset1.1.1');
dims = fliplr([2 3]);
mem_space_id = H5S.create_simple(2,dims,[]);
file_space_id = H5D.get_space(dset_id);
offset = fliplr([3 4]);
block = fliplr([2 3]);
H5S.select_hyperslab(file_space_id,'H5S_SELECT_SET',offset,[],[],block);
data = H5D.read(dset_id,'H5ML_DEFAULT',mem_space_id,file_space_id,plist);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

H5D.open | H5D.write | H5S.create_simple

H5D.set_extent

Change size of dataset dimensions

Syntax

```
H5D.set_extent(dset_id,h5_extents)
```

Description

`H5D.set_extent(dset_id,h5_extents)` changes the dimensions of the dataset `dset_id` to the sizes specified in `h5_extents`.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_extents` parameter assumes C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

Extend an unlimited one-dimensional dataset from a length of 10 to a length of 20.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
fid = H5F.open('myfile.h5','H5F_ACC_RDWR','H5P_DEFAULT');
dset_id = H5D.open(fid,'/g4/time');
H5D.set_extent(dset_id,20);
H5D.close(dset_id);
H5F.close(fid);
```

H5D.vlen_get_buf_size

Determine variable length storage requirements

Syntax

```
size = H5D.vlen_get_buf_size(dataset_id,type_id,space_id)
```

Description

`size = H5D.vlen_get_buf_size(dataset_id,type_id,space_id)` determines the number of bytes required to store the VL data from the dataset, using the `space_id` for the selection in the dataset on disk and the `type_id` for the memory representation of the VL data in memory.

H5D.write

Write data to HDF5 dataset

Syntax

```
H5D.write(dataset_id,mem_type_id,mem_space_id,file_space_id,plist_id,buf)
```

Description

`H5D.write(dataset_id,mem_type_id,mem_space_id,file_space_id,plist_id,buf)` writes the dataset specified by `dataset_id` from the application memory buffer `buf` into the file. `plist_id` specifies the data transfer properties. `mem_type_id` identifies the memory datatype of the dataset. `mem_space_id` and `file_space_id` define the part of the dataset to write. The memory datatype should usually be `'H5ML_DEFAULT'`, which specifies that MATLAB should determine the appropriate memory datatype.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

Write to the entire 36-by-19 `/g4/world` example dataset.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
plist = 'H5P_DEFAULT';
fid = H5F.open('myfile.h5','H5F_ACC_RDWR',plist);
dset_id = H5D.open(fid,'/g4/world');
dims = [36 19];
data = rand(dims);
H5D.write(dset_id,'H5ML_DEFAULT','H5S_ALL','H5S_ALL',plist,data);
H5D.close(dset_id);
H5F.close(fid);
```

Write to the entire two-element `/g3/VLstring` dataset.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
h5disp('myfile.h5','/g3/VLstring');
plist = 'H5P_DEFAULT';
fid = H5F.open('myfile.h5','H5F_ACC_RDWR',plist);
dset_id = H5D.open(fid,'/g3/VLstring');
data = {'dogs'; 'dogs and cats'};
H5D.write(dset_id,'H5ML_DEFAULT','H5S_ALL','H5S_ALL',plist,data);
H5D.close(dset_id);
H5F.close(fid);
data_out = h5read('myfile.h5','/g3/VLstring');
```

Write a 10-by-5 block of data to the location starting at row index 15 and column index 5 of the same dataset. Recall that indexing is zero-based.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
plist = 'H5P_DEFAULT';
fid = H5F.open('myfile.h5','H5F_ACC_RDWR',plist);
dset_id = H5D.open(fid,'/g4/world');
start = [15 5];
h5_start = fliplr(start);
block = [10 5];
h5_block = fliplr(block);
mem_space_id = H5S.create_simple(2,h5_block,[]);
file_space_id = H5D.get_space(dset_id);
H5S.select_hyperslab(file_space_id,'H5S_SELECT_SET',h5_start,[],[],h5_block);
data = rand(block);
H5D.write(dset_id,'H5ML_DEFAULT',mem_space_id,file_space_id,plist,data);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5D.read`

H5DS.attach_scale

Attach dimension scale to specific dataset dimension

Syntax

```
H5DS.attach_scale(dataset_id,dimscale_id,idx)
```

Description

`H5DS.attach_scale(dataset_id,dimscale_id,idx)` attaches a dimension scale `dimscale_id` to dimension `idx` of the dataset `dataset_id`.

Note: The ordering of the dimension scale indices are the same as the HDF5 library C API.

Examples

Add the `'lon'` and `'lat'` dimension scales to the `'world'` dataset.

```
plist = 'H5P_DEFAULT';
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
fid = H5F.open('myfile.h5','H5F_ACC_RDWR',plist);
world_dset_id = H5D.open(fid,'/g4/world',plist);
lat_dset_id = H5D.open(fid,'/g4/lat',plist);
lon_dset_id = H5D.open(fid,'/g4/lon',plist);
H5DS.attach_scale(world_dset_id,lat_dset_id,0);
H5DS.attach_scale(world_dset_id,lon_dset_id,1);
H5D.close(lat_dset_id);
H5D.close(lon_dset_id);
H5D.close(world_dset_id);
H5F.close(fid);
```

See Also

See Also

`H5DS.detach_scale`

H5DS.detach_scale

Detach dimension scale from specific dataset dimension

Syntax

```
H5DS.detach_scale(dataset_id,dimscale_id,idx)
```

Description

`H5DS.detach_scale(dataset_id,dimscale_id,idx)` detaches dimension scale `dimscale_id` from dimension `idx` of the dataset `dataset_id`.

Note: The ordering of the dimension scale indices are the same as the HDF5 library C API.

See Also

See Also

`H5DS.attach_scale`

H5DS.get_label

Retrieve label from specific dataset dimension

Syntax

```
label = H5DS.get_label(dataset_id,idx)
```

Description

`label = H5DS.get_label(dataset_id,idx)` retrieves the label for dimension `idx` of the dataset `dataset_id`.

Note: The ordering of the dimension scale indices are the same as the HDF5 library C API.

Examples

```
fid = H5F.open('example.h5');
world_dset_id = H5D.open(fid,'/g4/world');
label = H5DS.get_label(world_dset_id,0);
H5D.close(world_dset_id);
H5F.close(fid);
```

See Also

See Also

`H5DS.set_label`

H5DS.get_num_scales

Number of scales attached to dataset dimension

Syntax

```
num_scales = H5DS.get_num_scales(dataset_id,idx)
```

Description

`num_scales = H5DS.get_num_scales(dataset_id,idx)` determines the number of dimension scales that are attached to dimension `idx` of the dataset `dataset_id`.

Examples

```
fid = H5F.open('example.h5');
world_dset_id = H5D.open(fid,'/g4/world');
num_scales = H5DS.get_num_scales(world_dset_id,0);
H5D.close(world_dset_id);
H5F.close(fid);
```

H5DS.get_scale_name

Name of dimension scale

Syntax

```
name = H5DS.get_scale_name(dimscale_id)
```

Description

`name = H5DS.get_scale_name(dimscale_id)` retrieves the name of the dimension scale `dimscale_id`.

Examples

```
fid = H5F.open('example.h5');
lat_dset_id = H5D.open(fid,'/g4/lat');
scale_name = H5DS.get_scale_name(lat_dset_id);
H5D.close(lat_dset_id);
H5F.close(fid);
```

See Also

See Also

`H5DS.set_scale`

H5DS.is_scale

Determine if dataset is a dimension scale

Syntax

```
bool = H5DS.is_scale(dataset_id)
```

Description

`bool = H5DS.is_scale(dataset_id)` determines whether the dataset `dataset_id` is a dimension scale.

Examples

```
fid = H5F.open('example.h5');
lat_dset_id = H5D.open(fid,'/g4/lat');
if H5DS.is_scale(lat_dset_id)
    fprintf('/g4/lat is a dimension scale.\n');
else
    fprintf('/g4/lat is not a dimension scale.\n');
end
H5D.close(lat_dset_id);
H5F.close(fid);
```

H5DS.iterate_scales

Iterate on scales attached to dataset dimension

Syntax

```
[status,idx_out,opdata_out] =
H5DS.iterate_scales(dset_id,dim,idx_in,iter_func,opdata_in)
```

Description

`[status,idx_out,opdata_out] = H5DS.iterate_scales(dset_id,dim,idx_in,iter_func,opdata_in)` iterates over the scales attached to dimension `dim` of the dataset `dset_id` to perform a common operation whose function handle is `iter_func`.

`idx_in` specifies the starting point of the iteration. `idx_out` returns the point at which iteration was stopped. This allows an interrupted iteration to be resumed. If `idx_in` is `[]`, then the iterator starts at the first member.

The callback function `iter_func` must have the following signature:

```
function [status,opdata_out] =
iter_func(dset_id,dim,dimscale_id,opdata_in)
```

`opdata_in` is a user-defined value or structure and is passed to the first step of the iteration in the `iter_func` `opdata_in` parameter. The `opdata_out` of an iteration step forms the `opdata_in` for the next iteration step. The final `opdata_out` at the end of the iteration is then returned to the caller as `opdata_out`.

`dimscale_id` specifies the current dimension scale dataset identifier and `dim` is the associated dimension.

status value returned by `iter_func` is interpreted as follows:

zero	Continues with the iteration or returns zero status value to the caller if all members have been processed

positive	Stops the iteration and returns the positive status value to the caller
negative	Stops the iteration and throws an error indicating failure

H5DS.set_label

Set label for dataset dimension

Syntax

```
H5DS.set_label(dataset_id,idx,label)
```

Description

`H5DS.set_label(dataset_id,idx,label)` sets a label for dimension `idx` of the dataset `dataset_id`.

Note: The ordering of the dimension scale indices are the same as the HDF5 library C API.

Examples

```
plist = 'H5P_DEFAULT';
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
fid = H5F.open('myfile.h5','H5F_ACC_RDWR',plist);
world_dset_id = H5D.open(fid,'/g4/world',plist);
H5DS.set_label(world_dset_id,0,'latitude');
H5DS.set_label(world_dset_id,1,'longitude');
H5D.close(world_dset_id);
H5F.close(fid);
```

See Also

See Also

`H5DS.get_label`

H5DS.set_scale

Convert dataset to dimension scale

Syntax

```
H5DS.set_scale(dataset_id,dim_name)
```

Description

`H5DS.set_scale(dataset_id,dim_name)` converts the dataset, `dataset_id`, to a dimension scale with name `dim_name`.

Examples

Create a dimension scale with name `'xdim'`. The dataset has the name, `'x'`.

```
fid = H5F.create('myfile.h5');
space_id = H5S.create_simple(1,10,10);
dtype = 'H5T_NATIVE_INT';
dcpl = 'H5P_DEFAULT';
dset_id = H5D.create(fid,'x',dtype,space_id,dcpl);
H5DS.set_scale(dset_id,'xdim');
H5S.close(space_id);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5DS.get_scale_name`

H5E.clear

Clear error stack

Syntax

```
H5E.clear()
```

Description

`H5E.clear()` clears the error stack for the current thread.

H5E.get_major

Description of major error number

Syntax

```
err_string = H5E.get_major(major_number)
```

Description

`err_string = H5E.get_major(major_number)` returns a character vector describing an error specified by the major error number, `major_number`.

The HDF5 group has deprecated the use of this function.

See Also

See Also

`H5E.get_minor`

H5E.get_minor

Description of minor error number

Syntax

```
err_string = H5E.get_minor(minor_number)
```

Description

`err_string = H5E.get_minor(minor_number)` returns a character vector describing an error specified by the minor error number, `minor_number`.

The HDF5 group has deprecated the use of this function.

See Also

See Also

`H5E.get_major`

H5E.walk

Walk error stack

Syntax

```
H5E.walk(direction,func)
```

Description

`H5E.walk(direction,func)` walks the error stack for the current thread and calls the specified function for each error along the way. `func` is a function handle. `direction` specifies how the error stack is traversed and can be given by one of the following character vectors or the numeric equivalent.

```
'H5E_WALK_UPWARD'
'H5E_WALK_DOWNWARD'
```

The specified function must have the following signature:

```
status = func(n,error_struct)
```

where `n` is the indexed position of the error in the stack and `error_struct` is a structure with the following fields:

`maj_num`	Major error number
`min_num`	Minor error number
`func_name`	Function in which the error occurred
`file_name`	File in which the error occurred
`line`	Line in file where error occurs
`desc`	Optional supplied description

This function corresponds to the `H5Ewalk1` function in the HDF5 library C API.

See Also

See Also

`H5ML.get_constant_value`

H5F.close

Close HDF5 file

Syntax

```
H5F.close(file_id)
```

Description

`H5F.close(file_id)` terminates access to HDF5 file identified by `file_id`, flushing all data to storage.

See Also

See Also

`H5F.open`

H5F.create

Create HDF5 file

Syntax

```
file_id = H5F.create(filename)
file_id = H5F.create(name,flags,fcpl_id,fapl_id)
```

Description

`file_id = H5F.create(filename)` creates the file specified by `filename` with default library properties if the file does not already exist.

`file_id = H5F.create(name,flags,fcpl_id,fapl_id)` creates the file specified by `name`. `flags` specifies whether to truncate the file, if it already exists, or to fail if the file already exists. `flags` can be specified by one of the following character vectors or their numeric equivalent:

`'H5F_ACC_TRUNC'`	overwrite any existing file by the same name
`'H5F_ACC_EXCL'`	do not overwrite an existing file

`fcpl_id` is the file creation property list identifier. `fapl_id` is the file access property list identifier. A value of `'H5P_DEFAULT'` for either property list indicates that the library should use default values for the appropriate property list.

Examples

Create an HDF5 file called `'myfile.h5'`.

```
fid = H5F.create('myfile.h5');
H5F.close(fid);
```

Create an HDF5 file called `'myfile.h5'`, overwriting any existing file by the same name. Default file access and file creation properties shall apply.

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

See Also

See Also

H5F.close | H5ML.get_constant_value | H5P.create

H5F.flush

Flush buffers to disk

Syntax

```
H5F.flush(object_id,scope)
```

Description

`H5F.flush(object_id,scope)` causes all buffers associated with a file to be immediately flushed to disk without removing the data from the cache. `object_id` can be any object associated with the file, including the file itself, a dataset, a group, an attribute, or a named data type. `scope` specifies whether the scope of the flushing action is global or local. `scope` may be one of the following character vectors:

```
'H5F_SCOPE_GLOBAL'
'H5F_SCOPE_LOCAL'
```

H5F.get_access_plist

File access property list

Syntax

```
fapl_id = H5F.get_access_plist(file_id)
```

Description

`fapl_id = H5F.get_access_plist(file_id)` returns the file access property list identifier of the file specified by `file_id`.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
H5P.close(fapl);
H5F.close(fid);
```

See Also

See Also

`H5F.get_create_plist`

H5F.get_create_plist

File creation property list

Syntax

```
fcpl_id = H5F.get_create_plist(file_id)
```

Description

`fcpl_id = H5F.get_create_plist(file_id)` returns a file creation property list identifier identifying the creation properties used to create the file specified by `file_id`.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
H5P.close(fcpl);
H5F.close(fid);
```

See Also

See Also

`H5F.get_access_plist`

H5F.get_filesize

Size of HDF5 file

Syntax

```
size = H5F.get_filesize(file_id)
```

Description

`size = H5F.get_filesize(file_id)` returns the size of the HDF5 file specified by `file_id`.

H5F.get_freespace

Amount of free space in file

Syntax

```
free_space = H5F.get_freespace(file_id)
```

Description

`free_space = H5F.get_freespace(file_id)` returns the amount of space that is unused by any objects in the file specified by `file_id`.

H5F.get_info

Global information about file

Syntax

```
file_info = H5F.get_info(obj_id)
```

Description

`file_info = H5F.get_info(obj_id)` returns global information for the file associated with the object identifier `obj_id`. For details about the fields of the `file_info` structure, please refer to the HDF5 documentation.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'g2');
info = H5F.get_info(gid);
H5G.close(gid);
H5F.close(fid);
```

H5F.get_mdc_config

Metadata cache configuration

Syntax

```
config_struct = H5F.get_mdc_config(file_id)
```

Description

`config_struct = H5F.get_mdc_config(file_id)` returns the current metadata cache configuration for the target file.

Examples

```
fid = H5F.open('example.h5');
config = H5F.get_mdc_config(fid);
H5F.close(fid);
```

See Also

See Also

`H5F.set_mdc_config`

H5F.get_mdc_hit_rate

Metadata cache hit-rate

Syntax

```
hitRate = H5F.get_mdc_hit_rate(file_id)
```

Description

`hitRate = H5F.get_mdc_hit_rate(file_id)` queries the metadata cache of the target file to obtain its hit-rate since the last time hit-rate statistics were reset. If the cache has not been accessed since the last time the hit-rate statistics were reset, the hit-rate is defined to be 0.0. The hit-rate is calculated as

```
(cache hits / (cache hits + cache misses))
```

Examples

```
fid = H5F.open('example.h5');
hit_rate = H5F.get_mdc_hit_rate(fid);
H5F.close(fid);
```

See Also

See Also

`H5F.get_mdc_config`

H5F.get_mdc_size

Metadata cache size data

Syntax

```
[max_sz,min_clean_sz,cursz,num_cur_entries] =
H5F.get_mdc_size(fileId)
```

Description

`[max_sz,min_clean_sz,cursz,num_cur_entries] = H5F.get_mdc_size(fileId)` queries the metadata cache of the target file to obtain current metadata cache size information.

Examples

```
fid = H5F.open('example.h5');
[maxsz,minsz,cursz,nent] = H5F.get_mdc_size(fid);
H5F.close(fid);
```

See Also

See Also

`H5F.get_mdc_config`

H5F.get_name

Name of HDF5 file

Syntax

```
name = H5F.get_name(obj_id)
```

Description

`name = H5F.get_name(obj_id)` returns the name of the file to which the object `obj_id` belongs. The object can be a group, dataset, attribute, or named data type.

Examples

```
fid = H5F.open('example.h5');
name = H5F.get_name(fid);
H5F.close(fid);
```

See Also

See Also

`H5A.get_name` | `H5I.get_name`

H5F.get_obj_count

Number of open objects in HDF5 file

Syntax

```
obj_count = H5F.get_obj_count(file_id,types)
```

Description

`obj_count = H5F.get_obj_count(file_id,types)` returns the number of open object identifiers for the file specified by `file_id` for the specified type. `types` can be specified by one of the following character vectors:

- `'H5F_OBJ_FILE'`
- `'H5F_OBJ_DATASET'`
- `'H5F_OBJ_GROUP'`
- `'H5F_OBJ_DATATYPE'`
- `'H5F_OBJ_ATTR'`
- `'H5F_OBJ_ALL'`
- `'H5F_OBJ_LOCAL'`

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g2');
obj_count = H5F.get_obj_count(fid,'H5F_OBJ_GROUP');
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5F.get_obj_ids`

H5F.get_obj_ids

List of open HDF5 file objects

Syntax

```
[num_obj_ids,obj_id_list] = H5F.get_obj_ids(file_id,types,max_objs)
```

Description

`[num_obj_ids,obj_id_list] = H5F.get_obj_ids(file_id,types,max_objs)` returns a list of all open identifiers for HDF5 objects of the type specified by `types` in the file specified by `file_id`. The `max_objs` input specifies the maximum number of object identifiers to return. `num_obj_ids` is the total number of objects in the list. Specify `types` as one of these values:

```
'H5F_OBJ_FILE'
'H5F_OBJ_DATASET'
'H5F_OBJ_GROUP'
'H5F_OBJ_DATATYPE'
'H5F_OBJ_ATTR'
'H5F_OBJ_ALL'
'H5F_OBJ_LOCAL'
```

Note: If the number of objects of the specified type, that are open, exceeds `max_objs`, then `num_obj_ids` will be greater than `max_objs`.

Examples

```
fid = H5F.open('example.h5');
gid1 = H5G.open(fid,'/g1');
gid2 = H5G.open(fid,'/g2');
gid3 = H5G.open(fid,'/g3');
```

```
gid4 = H5G.open(fid,'/g4');
[num_obj_ids,objs] = H5F.get_obj_ids(fid,'H5F_OBJ_GROUP',3);
H5G.close(gid1);
H5G.close(gid2);
H5G.close(gid3);
H5G.close(gid4);
H5F.close(fid);
```

See Also

See Also

H5F.get_obj_count

H5F.is_hdf5

Determine if file is HDF5

Syntax

```
value = H5F.is_hdf5(name)
```

Description

`value = H5F.is_hdf5(name)` returns a positive number if the file specified by `name` is in the HDF5 format, and zero if it is not. A negative return value indicates failure.

Examples

```
value = H5F.is_hdf5('example.tif');
if value > 0
    fprintf('example.tif is an HDF5 file\n');
else
    fprintf('example.tif is not an HDF5 file\n');
end
```

H5F.mount

Mount HDF5 file onto specified location

Syntax

```
H5F.mount(loc_id,name,child_id,plist_id)
```

Description

`H5F.mount(loc_id,name,child_id,plist_id)` mounts the file specified by `child_id` onto the group specified by `loc_id` and `name`, using the mount properties specified by `plist_id`.

Examples

Mount one file with a dataset onto a group in a second file and access the dataset via the second file.

```
plist = 'H5P_DEFAULT';
fid2 = H5F.create('file2.h5','H5F_ACC_TRUNC',plist,plist);
gid2 = H5G.create(fid2,'g2',plist,plist,plist);
fid1 = H5F.create('file1.h5','H5F_ACC_TRUNC','H5P_DEFAULT',...
  'H5P_DEFAULT');
space_id = H5S.create('H5S_SCALAR');
dset_id = H5D.create(fid1,'DS1','H5T_NATIVE_DOUBLE',space_id,plist);
H5S.close(space_id);
H5D.close(dset_id);
H5F.mount(fid2,'g2',fid1,plist);
dset_id1 = H5D.open(fid1,'/g2/DS1',plist);
H5D.close(dset_id1);
H5F.unmount(fid1,'g2');
H5G.close(gid2);
H5F.close(fid1);
H5F.close(fid2);
```

See Also

See Also

`H5F.unmount`

H5F.open

Open HDF5 file

Syntax

```
file_id = H5F.open(filename)
file_id = H5F.open(name,flags,fapl_id)
```

Description

`file_id = H5F.open(filename)` opens the file specified by `filename` for read-only access and returns the file identifier, `file_id`.

`file_id = H5F.open(name,flags,fapl_id)` opens the file specified by `name`, returning the file identifier, `file_id`. `flags` specifies file access flags and can be specified by one of the following character vectors or their numeric equivalents:

`'H5F_ACC_RDWR'`	read-write mode
`'H5F_ACC_RDONLY'`	read-only mode

The file access property list, `fapl_id`, may be specified as `'H5P_DEFAULT'`, in which case the default I/O settings are used.

Examples

Open a file in read-only mode with default file access properties.

```
fid = H5F.open('example.h5');
H5F.close(fid);
```

Open a file in read-write mode.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
fid = H5F.open('myfile.h5','H5F_ACC_RDWR','H5P_DEFAULT');
```

```
H5F.close(fid);
```

See Also

See Also

H5F.close | H5ML.get_constant_value

H5F.reopen

Reopen HDF5 file

Syntax

```
new_file_id = H5F.reopen(file_id)
```

Description

`new_file_id = H5F.reopen(file_id)` returns a new file identifier for the already open HDF5 file specified by `file_id`.

See Also

See Also

`H5F.open`

H5F.set_mdc_config

Configure HDF5 file metadata cache

Syntax

```
H5F.set_mdc_config(fileId,config)
```

Description

`H5F.set_mdc_config(fileId,config)` attempts to configure the file's metadata cache according to the supplied configuration structure. Before using this function, you should retrieve the current configuration using `H5F.get_mdc_config`.

See Also

See Also

`H5F.get_mdc_config`

H5F.unmount

Unmount file or group from mount point

Syntax

```
H5F.unmount(loc_id,name)
```

Description

`H5F.unmount(loc_id,name)` dissassociates the file or group specified by `loc_id` from the mount point specified by `name`. `loc_id` can be a file or group identifier.

See Also

See Also

`H5F.mount`

H5G.close

Close group

Syntax

```
H5G.close(group_id)
```

Description

`H5G.close(group_id)` releases resources used by the group specified by `group_id`. `group_id` was returned by either `H5G.create` or `H5G.open`.

See Also

See Also

`H5G.create` | `H5G.open`

H5G.create

Create group

Syntax

```
group_id = H5G.create(loc_id,name,size_hint)
group_id = H5G.create(loc_id,name,lcpl_id,gcpl_id,gapl_id)
```

Description

`group_id = H5G.create(loc_id,name,size_hint)` creates a new group with the name specified by `name` at the location specified by `loc_id`. `loc_id` can be a file or group identifier. `size_hint` specifies the number of bytes to reserve for the names that will appear in the group. This interface corresponds to the 1.6 version of `H5Gcreate`.

`group_id = H5G.create(loc_id,name,lcpl_id,gcpl_id,gapl_id)` creates a new group with link creation, group creation, and group access property lists `lcpl_id`, `gcpl_id`, and `gapl_id`. This interface corresponds to the 1.8 version of `H5Gcreate`.

Examples

Create an HDF5 file `'myfile.h5'` with a group `'my_group'` with default property list settings.

```
fid = H5F.create('myfile.h5');
plist = 'H5P_DEFAULT';
gid = H5G.create(fid,'my_group',plist,plist,plist);
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5G.close` | `H5G.open`

H5G.get_info

Information about group

Syntax

```
info = H5G.get_info(group_id)
```

Description

`info = H5G.get_info(group_id)` retrieves information about the group specified by `group_id`.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g2');
info = H5G.get_info(gid);
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5G.create` | `H5G.open`

H5G.open

Open specified group

Syntax

```
group_id = H5G.open(loc_id,name)
group_id = H5G.open(loc_id,name,gapl_id)
```

Description

`group_id = H5G.open(loc_id,name)` opens the group specified by `name` at the location specified by `loc_id`. `loc_id` is a file or group identifier. This interface corresponds to the 1.6 version of `H5Gopen`.

`group_id = H5G.open(loc_id,name,gapl_id)` opens the group with an additional group access property list, `gapl_id`. This interface corresponds to the 1.8 version of `H5Gopen`.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g2');
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5G.close` | `H5P.create`

H5I.dec_ref

Decrement reference count

Syntax

```
ref_count = H5I.dec_ref(obj_id)
```

Description

`ref_count = H5I.dec_ref(obj_id)` decrements the reference count of the object identified by `obj_id` and returns the new count.

See Also

See Also

`H5I.get_ref` | `H5I.inc_ref`

H5I.get_file_id

File identifier for specified object

Syntax

```
file_id = H5I.get_file_id(obj_id)
```

Description

`file_id = H5I.get_file_id(obj_id)` returns the identifier of the file associated with the object referenced by `obj_id`.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g4');
fid2 = H5I.get_file_id(gid);
name = H5F.get_name(fid2);
fprintf('The filename is %s.\n',name);
H5G.close(gid);
H5F.close(fid);
H5F.close(fid2);
```

H5I.get_name

Name of object

Syntax

```
name = H5I.get_name(obj_id)
```

Description

`name = H5I.get_name(obj_id)` returns the name of the object specified by `obj_id`. If no name is attached to the object, an empty character vector is returned.

Examples

Display the names of all the objects in the `/g3` group in the example file by alphabetical order.

```
idx_type = 'H5_INDEX_NAME';
order = 'H5_ITER_INC';
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g3');
info = H5G.get_info(gid);
for j = 1:info.nlinks
    obj_id = H5O.open_by_idx(fid,'g3',idx_type,order,j-1,'H5P_DEFAULT');
    name = H5I.get_name(obj_id);
    fprintf('Object %d: ''%s''.\n',j-1,name);
    H5O.close(obj_id);
end
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5A.get_name` | `H5F.get_name`

H5I.get_ref

Reference count of object

Syntax

```
refcount = H5I.get_ref(obj_id)
```

Description

`refcount = H5I.get_ref(obj_id)` returns the reference count of the object specified by `obj_id`.

See Also

See Also

`H5I.dec_ref` | `H5I.inc_ref`

H5I.get_type

Type of object

Syntax

```
obj_type = H5I.get_type(obj_id)
```

Description

`obj_type = H5I.get_type(obj_id)` returns the type of the object specified by `obj_id`. `obj_type` corresponds to one of the following enumerated values.

```
H5I_FILE
H5I_GROUP
H5I_DATATYPE
H5I_DATASPACE
H5I_DATASET
H5I_ATTR
H5I_BADID
```

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g3');
dset_id = H5D.open(fid,'/g4/world');
[~,objs] = H5F.get_obj_ids(fid,'H5F_OBJ_ALL',3);
for j = 1:numel(objs)
    name = H5I.get_name(objs(j));
    fprintf('object ''%s'':  ==> ',name);
    type = H5I.get_type(objs(j));
    switch(type)
        case H5ML.get_constant_value('H5I_FILE')
            fprintf('FILE identifier.\n');
```

```
        case H5ML.get_constant_value('H5I_GROUP')
            fprintf('GROUP identifier.\n');
        case H5ML.get_constant_value('H5I_DATASET')
            fprintf('DATASET identifier.\n');
        otherwise
            fprintf('unknown identifier type.\n');
    end
end
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

H5ML.get_constant_value

H5I.inc_ref

Increment reference count of specified object

Syntax

```
ref_count = H5I.inc_ref(obj_id)
```

Description

`ref_count = H5I.inc_ref(obj_id)` increments the reference count of the object specified by `obj_id` and returns the new count.

See Also

See Also

`H5I.dec_ref` | `H5I.get_ref`

H5I.is_valid

Determine if specified identifier is valid

Syntax

```
tf = H5I.is_valid(obj_id)
```

Description

`tf = H5I.is_valid(obj_id)` determines whether the identifier `obj_id` is valid.

Examples

```
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.close(fapl);
if H5I.is_valid(fapl);
    fprintf('File access property list is valid.\n');
else
    fprintf('File access property list is not valid.\n');
end
```

H5L.copy

Copy link from source location to destination location

Syntax

```
H5L.copy(src_loc_id,src_name,dest_loc_id,dest_name,lcpl_id,lapl_id)
```

Description

`H5L.copy(src_loc_id,src_name,dest_loc_id,dest_name,lcpl_id,lapl_id)` copies the link specified by `src_name` from the file or group specified by `src_loc_id` to the destination `dest_loc_id`. The new copy of the link is created with the name `dest_name`.

`dest_loc_id` must refer to either the current file or a group in the current file. If `dest_loc_id` is the file identifier, the copy is placed in the file's root group.

The new link is created with the creation and access property lists specified by `lcpl_id` and `lapl_id`.

Examples

```
plist_id = 'H5P_DEFAULT';
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',plist_id,plist_id);
g1 = H5G.create(fid,'g1',plist_id);
g2 = H5G.create(fid,'g2',plist_id);
g11 = H5G.create(g1,'g3',plist_id);
H5L.copy(g1,'g3',g2,'g4',plist_id,plist_id);
```

H5L.create_external

Create soft link to external object

Syntax

```
H5L.create_external(filename,objname,link_loc_id,link_name,lcpl_id,lapl_id)
```

Description

`H5L.create_external(filename,objname,link_loc_id,link_name,lcpl_id,lapl_id)` creates a soft link to an object in a different file. `filename` identifies the target file containing the target object. `obj_name` specifies the path to the target object within that file. `obj_name` must start at the target file's root group but is not interpreted until lookup time.

`link_loc_id` and `link_name` specify the location and name, respectively, of the new link. `link_name` is interpreted relative to `link_loc_id`.

`lcpl_id` and `lapl_id` are the link creation and access property lists associated with the new link.

Examples

```
plist_id = 'H5P_DEFAULT';
fid1 = H5F.create('myfile1.h5');
g1 = H5G.create(fid1,'g1',plist_id,plist_id,plist_id);
H5G.close(g1);
H5F.close(fid1);
fid2 = H5F.create('myfile2.h5');
H5L.create_external('myfile1.h5','g1',fid2,'g2',plist_id,plist_id);
```

H5L.create_hard

Create hard link

Syntax

```
H5L.create_hard(obj_loc_id,obj_name,link_loc_id,link_name,lcpl_id,lapl_id)
```

Description

`H5L.create_hard(obj_loc_id,obj_name,link_loc_id,link_name,lcpl_id,lapl_id)` creates a new hard link to a pre-existing object in an HDF5 file. The new link may be one of many that point to that object. `obj_loc_id` and `obj_name` specify the location and name, respectively, of the target object, i.e., the object to which the new hard link points.

`link_loc_id` and `link_name` specify the location and name, respectively, of the new link. `link_name` is interpreted relative to `link_loc_id`.

`lcpl_id` and `lapl_id` are the link creation and access property lists associated with the new link.

Examples

```
fid = H5F.create('myfile.h5');
gid1 = H5G.create(fid,'/g1',0);
gid2 = H5G.create(gid1,'g2',0);
gid3 = H5G.create(gid2,'g3',0);
lcpl = 'H5P_DEFAULT';
lapl = 'H5P_DEFAULT';
H5L.create_hard(gid2,'g3',gid1,'g4',lcpl,lapl);
H5G.close(gid3);
H5G.close(gid2);
H5G.close(gid1);
H5F.close(fid);
```

See Also

See Also

`H5L.create_soft`

H5L.create_soft

Create soft link

Syntax

```
H5L.create_soft(target_path,link_loc_id,link_name,lcpl_id,lapl_id)
```

Description

`H5L.create_soft(target_path,link_loc_id,link_name,lcpl_id,lapl_id)` creates a new soft link to an object in an HDF5 file. The new link may be one of many that point to that object. `target_path` specifies the path to the target object, i.e., the object that the new soft link points to. `target_path` can be anything and is interpreted at lookup time. This `target_path` may be absolute in the file or relative to `link_loc_id`.

`link_loc_id` and `link_name` specify the location and name, respectively, of the new link. `link_name` is interpreted relative to `link_loc_id`.

`lcpl_id` and `lapl_id` are the link creation and access property lists associated with the new link.

Examples

```
plist_id = 'H5P_DEFAULT';
fid = H5F.create('myfile.h5');
gid1 = H5G.create(fid,'/g1',0);
gid3 = H5G.create(gid1,'g3',0);
gid2 = H5G.create(fid,'/g2',0);
lcpl = 'H5P_DEFAULT';
lapl = 'H5P_DEFAULT';
H5L.create_soft('/g1/g3',gid2,'g4',lcpl,lapl);
H5G.close(gid3);
H5G.close(gid2);
H5G.close(gid1);
H5F.close(fid);
```

See Also

See Also

`H5L.create_hard`

H5L.delete

Remove link

Syntax

```
H5L.delete(loc_id,name,lapl_id)
```

Description

`H5L.delete(loc_id,name,lapl_id)` removes the link specified by name from the location `loc_id`. `lapl_id` is a link access property list identifier.

Examples

Remove the only link to the `'/g3'` group in `example.h5`.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
fid = H5F.open('myfile.h5','H5F_ACC_RDWR','H5P_DEFAULT');
H5L.delete(fid,'g3','H5P_DEFAULT');
H5F.close(fid);
```

See Also

See Also

`H5L.move`

H5L.exists

Determine if link exists

Syntax

```
bool = H5L.exists(loc_id,name,lapl_id)
```

Description

`bool = H5L.exists(loc_id,name,lapl_id)` checks if a link specified by the pairing of an object id and name exists within a group. `lapl_id` is a link access property list identifier.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g1/g1.2/g1.2.1');
if H5L.exists(gid,'slink','H5P_DEFAULT')
    fprintf('link exists\n');
else
    fprintf('link does not exist\n');
end
```

H5L.get_info

Information about link

Syntax

```
linkStruct = H5L.get_info(location_id,link_name,lapl_id)
```

Description

`linkStruct = H5L.get_info(location_id,link_name,lapl_id)` returns information about a link.

A file or group identifier, `location_id`, specifies the location of the link. `link_name`, interpreted relative to `link_id`, specifies the link being queried.

Examples

```
fid = H5F.open('example.h5');
info = H5L.get_info(fid,'g3','H5P_DEFAULT');
H5F.close(fid);
```

H5L.get_name_by_idx

Information about link specified by index

Syntax

```
name =
H5L.get_name_by_idx(loc_id,group_name,idx_type,order,n,lapl_id)
```

Description

`name = H5L.get_name_by_idx(loc_id,group_name,idx_type,order,n,lapl_id)` retrieves information about a link at index `n`, present in group `group_name`, at location `loc_id`. The `lapl_id` input specifies the link access property list for querying the group.

`idx_type` is the type of index and valid values include the following.

`'H5_INDEX_NAME'`	Alpha-numeric index on name
`'H5_INDEX_CRT_ORDER'`	Index on creation order

`order` specifies the index traversal order. Valid values include the following.

`'H5_ITER_INC'`	Iteration from beginning to end
`'H5_ITER_DEC'`	Iteration from end to beginning
`'H5_ITER_NATIVE'`	Iteration in the fastest available order

Examples

```
fid = H5F.open('example.h5');
idx_type = 'H5_INDEX_NAME';
order = 'H5_ITER_DEC';
lapl_id = 'H5P_DEFAULT';
name = H5L.get_name_by_idx(fid,'g3',idx_type,order,0,lapl_id);
H5F.close(fid);
```

H5L.get_val

Value of symbolic link

Syntax

```
linkval = H5L.get_val(link_loc_id,link_name,lapl_id)
```

Description

`linkval = H5L.get_val(link_loc_id,link_name,lapl_id)` returns the value of a symbolic link.

`link_loc_id` is a file or group identifier. `link_name` identifies a symbolic link and is defined relative to `link_loc_id`. Symbolic links include soft and external links and some user-defined links.

In the case of soft links, `linkval` is a cell array containing the path to which the link points.

In the case of external links, `linkval` is a cell array consisting of the name of the target file and the object name.

This function corresponds to the `H5L.get_val` and `H5Lunpack_elink_val` functions in the HDF5 1.8 C API.

Examples

```
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/g1/g1.2/g1.2.1');
linkval = H5L.get_val(gid,'slink','H5P_DEFAULT');
H5G.close(gid);
H5F.close(fid);
```

H5L.iterate

Iterate over links

Syntax

```
[status,idx_out,opdata_out] =
H5L.iterate(group_id,index_type,order,idx_in,iter_func,opdata_in)
```

Description

`[status,idx_out,opdata_out] = H5L.iterate(group_id,index_type,order,idx_in,iter_func,opdata_in)` iterates through the links in a group, specified by `group_id`, to perform a common function whose function handle is `iter_func`. `H5L.iterate` does not recursively follow links into subgroups of the specified group.

`index_type` and `order` establish the iteration. `index_type` specifies the index to be used. If the links have not been indexed by the index type, they will first be sorted by that index then the iteration will begin. If the links have been so indexed, the sorting step will be unnecessary, so the iteration may begin more quickly. Valid values include the following:

`'H5_INDEX_NAME'`	Alpha-numeric index on name
`'H5_INDEX_CRT_ORDER'`	Index on creation order

`order` specifies the order in which objects are to be inspected along the index specified in `index_type`. Valid values include the following:

`'H5_ITER_INC'`	Increasing order
`'H5_ITER_DEC'`	Decreasing order
`'H5_ITER_NATIVE'`	Fastest available order

`idx_in` specifies the starting point of the iteration. `idx_out` returns the point at which iteration was stopped. This allows an interrupted iteration to be resumed.

The callback function `iter_func` must have the following signature:

```
function [status,opdata_out] = iter_func(group_id,name,opdata_in)
```

`opdata_in` is a user-defined value or structure and is passed to the first step of the iteration in the `iter_func` `opdata_in` parameter. The `opdata_out` of an iteration step forms the `opdata_in` for the next iteration step. The final `opdata_out` at the end of the iteration is then returned to the caller as `opdata_out`.

`status` value returned by `iter_func` is interpreted as follows:

zero	Continues with the iteration or returns zero status value to the caller if all members have been processed
positive	Stops the iteration and returns the positive status value to the caller
negative	Stops the iteration and throws an error indicating failure

H5L.iterate_by_name

Iterate through links in group specified by name

Syntax

```
[status,idx_out,opdata_out] =
H5L.iterate_by_name(loc_id,group_name,index_type,order,idx_in,iter_func,opdata
```

Description

`[status,idx_out,opdata_out] = H5L.iterate_by_name(loc_id,group_name,index_type,order,idx_in,iter_func,opdata` iterates through the links in a group to perform a common function whose function handle is `iter_func`. The starting point of the iteration is pairing of a specified by the location id and a relative group name. `H5L.iterate_by_name` does not recursively follow links into subgroups of the specified group. A link access property list, `lapl_id`, may affect the outcome depending upon the type of link being traversed.

`index_type` and `order` establish the iteration. `index_type` specifies the index to be used. If the links have not been indexed by the index type, they will first be sorted by that index then the iteration will begin. If the links have been so indexed, the sorting step will be unnecessary, so the iteration may begin more quickly. Valid values include the following:

`'H5_INDEX_NAME'`	Alpha-numeric index on name
`'H5_INDEX_CRT_ORDER'`	Index on creation order

`order` specifies the order in which objects are to be inspected along the index specified in `index_type`. Valid values include the following:

`'H5_ITER_INC'`	Increasing order
`'H5_ITER_DEC'`	Decreasing order
`'H5_ITER_NATIVE'`	Fastest available order

`idx_in` specifies the starting point of the iteration. `idx_out` returns the point at which iteration was stopped. This allows an interrupted iteration to be resumed.

The callback function `iter_func` must have the following signature:

```
function [status,opdata_out] = iter_func(group_id,name,opdata_in)
```

`opdata_in` is a user-defined value or structure and is passed to the first step of the iteration in the `iter_func` `opdata_in` parameter. The `opdata_out` of an iteration step forms the `opdata_in` for the next iteration step. The final opdata_out at the end of the iteration is then returned to the caller as `opdata_out`.

`status` value returned by `iter_func` is interpreted as follows:

zero	Continues with the iteration or returns zero status value to the caller if all members have been processed
positive	Stops the iteration and returns the positive status value to the caller
negative	Stops the iteration and throws an error indicating failure

H5L.move

Rename link

Syntax

```
H5L.move(src_loc_id,src_name,dest_loc_id,dest_name,lcpl_id,lapl_id)
```

Description

`H5L.move(src_loc_id,src_name,dest_loc_id,dest_name,lcpl_id,lapl_id)` renames a link within an HDF5 file. The original link, `src_name`, is removed from the group graph and the new link, `dest_name`, is inserted; this change is accomplished as an atomic operation.

`src_loc_id` and `src_name` identify the existing link. `src_loc_id` is either a file or group identifier; `src_name` is the path to the link and is interpreted relative to `src_loc_id`.

`dest_loc_id` and `dest_name` identify the new link. `dest_loc_id` is either a file or group identifier; `dest_name` is the path to the link and is interpreted relative to `dest_loc_id`.

`lcpl_id` and `lapl_id` are the link creation and link access property lists, respectively, associated with the new link, `dest_name`.

Examples

Rename the `'/g2'` group to `'/g2/g3'`.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.h5');
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
fid = H5F.open('myfile.h5','H5F_ACC_RDWR','H5P_DEFAULT');
g2id = H5G.open(fid,'g2');
H5L.move(fid,'g3',g2id,'g3','H5P_DEFAULT','H5P_DEFAULT');
H5G.close(g2id);
```

```
H5F.close(fid);
```

See Also

See Also

H5L.delete

H5L.visit

Recursively iterate through links in group specified by group identifier

Syntax

```
[status opdata_out] =
H5L.visit(group_id,index_type,order,iter_func,opdata_in)
```

Description

`[status opdata_out] = H5L.visit(group_id,index_type,order,iter_func,opdata_in)` recursively iterates through all links in and below a group, specified by `group_id`, to perform a common function whose function handle is `iter_func`.

`index_type` and order establish the iteration. `index_type` specifies the index to be used. If the links have not been indexed by the index type, they are first sorted by that index, and then the iteration will begin. If the links have been so indexed, the sorting step is unnecessary, so the iteration can begin more quickly. Valid values include the following.

`'H5_INDEX_NAME'`	Alpha-numeric index on name
`'H5_INDEX_CRT_ORDER'`	Index on creation order

Note that the index type passed in `index_type` is a best effort setting. If the application passes in a value indicating iteration in creation order and a group is encountered that was not tracked in creation order, that group will be iterated over in alpha-numeric order by name, or name order. (Name order is the native order used by the HDF5 Library and is always available.)

`order` specifies the order in which objects are to be inspected along the index specified in `index_type`. Valid values include the following.

`'H5_ITER_INC'`	Increasing order
`'H5_ITER_DEC'`	Decreasing order

`'H5_ITER_NATIVE'`	Fastest available order

The callback function `iter_func` must have the following signature:

```
function [status,opdata_out] = iter_func(group_id,name,opdata_in)
```

`opdata_in` is a user-defined value or structure and is passed to the first step of the iteration in the `iter_func` `opdata_in` parameter. The `opdata_out` of an iteration step forms the `opdata_in` for the next iteration step. The final `opdata_out` at the end of the iteration is then returned to the caller as `opdata_out`.

`status` value returned by `iter_func` is interpreted as follows.

zero	Continues with the iteration or returns zero status value to the caller if all members have been processed
positive	Stops the iteration and returns the positive status value to the caller
negative	Stops the iteration and throws an error indicating failure

H5L.visit_by_name

Recursively iterate through links in group specified by location and group name

Syntax

```
[status,opdata_out] =
H5L.visit_by_name(loc_id,group_name,index_type,order,iter_func,opdata_in,lapl_
```

Description

`[status,opdata_out] = H5L.visit_by_name(loc_id,group_name,index_type,order,iter_func,opdata_in,lapl_` recursively iterates though all links in and below a group to perform a common function whose function handle is `iter_func`. The starting point of the iteration is specified by the pairing of a location id and a relative group name. A link access property list, `lapl_id`, may affect the outcome depending upon the type of link being traversed.

`index_type` and `order` establish the iteration. `index_type` specifies the index to be used. If the links have not been indexed by the index type, they are first sorted by that index, and then the iteration will begin. If the links have been so indexed, the sorting step is unnecessary, so the iteration can begin more quickly. Valid values include the following.

`'H5_INDEX_NAME'`	Alpha-numeric index on name
`'H5_INDEX_CRT_ORDER'`	Index on creation order

Note that the index type passed in `index_type` is a best effort setting. If the application passes in a value indicating iteration in creation order and a group is encountered that was not tracked in creation order, that group will be iterated over in alpha-numeric order by name, or name order. (Name order is the native order used by the HDF5 Library and is always available.)

`order` specifies the order in which objects are to be inspected along the index specified in `index_type`. Valid values include the following.

`'H5_ITER_INC'`	Increasing order

`'H5_ITER_DEC'`	Decreasing order
`'H5_ITER_NATIVE'`	Fastest available order

The callback function `iter_func` must have the following signature:

```
function [status,opdata_out] = iter_func(group_id,name,opdata_in)
```

`opdata_in` is a user-defined value or structure and is passed to the first step of the iteration in the `iter_func` `opdata_in` parameter. The `opdata_out` of an iteration step forms the `opdata_in` for the next iteration step. The final `opdata_out` at the end of the iteration is then returned to the caller as `opdata_out`.

`status` value returned by `iter_func` is interpreted as follows.

zero	Continues with the iteration or returns zero status value to the caller if all members have been processed
positive	Stops the iteration and returns the positive status value to the caller
negative	Stops the iteration and throws an error indicating failure

H5ML.compare_values

Numerically compare two HDF5 values

Syntax

```
bEqual = H5ML.compare_values(value1,value2)
```

Description

`bEqual = H5ML.compare_values(value1,value2)` compares two values, where either or both values may be specified by their text representation (for example, `'H5T_NATIVE_INT'`). The values are compared numerically.

Function parameters:

`bEqual`	A logical value indicating whether the two values are equal
`value1`	The first value to be compared
`value2`	The second value to be compared

Examples

```
val = H5ML.get_constant_value('H5T_NATIVE_INT');
H5ML.compare_values(val,'H5T_NATIVE_INT')
```

H5ML.get_constant_names

Constants known by HDF5 library

Syntax

```
names = H5ML.get_constant_names()
```

Description

`names = H5ML.get_constant_names()` returns a list of known library constants, definitions, and enumerations. When these names are supplied as actual parameters to HDF5 functions, they are automatically be converted to the appropriate numeric value.

Function parameters.

`names`	An alphabetized cell array of character vectors containing the names.

H5ML.get_constant_value

Value corresponding to a string

Syntax

```
value = H5ML.get_constant_value(constant)
```

Description

`value = H5ML.get_constant_value(constant)` returns the numerical value corresponding to a given HDF5 enumeration or identifier. `constant` is specified as a character vector that contains an enumeration (for example, `'H5_ENUM_T'`) or a predefined identifier (for example, `'H5T_NATIVE_INT'`). Since the value corresponding to a given identifier is not guaranteed to remain the same, it is almost always preferable to use the `H5ML.compare_values()` function instead.

Function parameters:

`value`	The numerical value corresponding to the supplied HDF5 enumeration or identifier.
`constant`	A character vector containing a HDF5 enumeration or defined value.

Examples

```
a = H5ML.get_constant_value('H5T_NATIVE_INT');
```

H5ML.get_function_names

Functions provided by HDF5 library

Syntax

```
names = H5ML.get_function_names()
```

Description

`names = H5ML.get_function_names()` returns a list of supported library functions.

Function parameters:

`names`	An alphabetized cell array of names

H5ML.get_mem_datatype

Data type for dataset ID

Syntax

```
DTYPE_ID = H5ML.get_mem_datatype(LOCATION_ID)
```

Description

`DTYPE_ID = H5ML.get_mem_datatype(LOCATION_ID)` returns the ID of an HDF5 memory datatype for the dataset or attribute identified by `LOCATION_ID`. This HDF5 memory datatype is the default used by `H5D.read` or `H5D.write` when you specify `'H5ML_DEFAULT'` as a value of the memory data type parameter.

The identifier returned by `H5ML.get_mem_datatype` should eventually be closed by calling `H5T.close` to release resources.

Examples

```
file_id = H5F.open('example.h5','H5F_ACC_RDONLY','H5P_DEFAULT');
dset_id = H5D.open(file_id,'/g1/g1.1/dset1.1.1');
datatype_id = H5ML.get_mem_datatype(dset_id)
H5T.close(datatype_id);
H5D.close(dset_id);
H5F.close(file_id);
```

H5ML.hoffset

Determine the offset of a field within a structure

Note: `H5ML.hoffset` is not recommended. Use `H5T` instead.

Syntax

Description

This function is used to determine the offset (in bytes) of a structure, `H5T.insert(file_type,'a', offset(1), dtype(1));`, within a field. It is used when constructing an HDF5 COMPOUND type. It is designed to correspond to the HDF5 HOFFSET macro. For more details about the operation of the HOFFSET macro, please consult the HDF5 documentation.

Function parameters:

`offset`	The byte offset of the field within the structure.
`structure`	The structure which contains the specified fieldname.
`fieldname`	The field for which the offset is determined.

Examples

This function is deprecated. It can only be used in workflows that do not include a field that is itself an HDF5 COMPOUND or of variable length. To handle these cases, the offsets should be computed directly. For example, in the case above, a file dataspace for such a compound could be created with:

```
dtype(1) = H5T.copy('H5T_NATIVE_INT');
```

```
dtype(2) = H5T.copy('H5T_NATIVE_DOUBLE');
dtype(3) = H5T.copy('H5T_NATIVE_FLOAT');

for j = 1:3, sz(j,1) = H5T.get_size(dtype(j)); end

% The first offset would always be zero and the size of the last
% field does not matter.
offset(1) = 0;
offset(2:3) = cumsum(sz(1:2));

file_type = H5T.create('H5T_COMPOUND',sum(sz));

H5T.insert(file_type,'a', offset(1), dtype(1));
H5T.insert(file_type,'b', offset(2), dtype(2));
H5T.insert(file_type,'c', offset(3), dtype(3));
```

See Also

See Also

H5T.get_size

H5ML.sizeof

Return the size (in bytes) of a variable as stored on disk

Note: `H5ML.sizeof` is not recommended. Use `H5T` instead.

Syntax

Description

This function is used to determine the size (in bytes) of a structure or other (simple) variable. It is designed to correspond to the C sizeof() operator as it is used during the creation of HDF5 datatypes, especially the HDF5 COMPOUND type.

Function parameters:

`size`	The size (in bytes) of the variable as it would be stored on disk.
`arg`	The variable for which the size is being sought.

Examples

This function is deprecated. It can only be used in workflows that do not include a field that is itself an HDF5 COMPOUND or of variable length. To handle these cases, the offsets should be computed directly. For example, in the case above, a file dataspace for such a compound could be created with:

```
dtype(1) = H5T.copy('H5T_NATIVE_INT');
dtype(2) = H5T.copy('H5T_NATIVE_DOUBLE');
dtype(3) = H5T.copy('H5T_NATIVE_FLOAT');

for j = 1:3, sz(j,1) = H5T.get_size(dtype(j)); end
```

```
% The first offset would always be zero and the size of the last
% field does not matter.
offset(1) = 0;
offset(2:3) = cumsum(sz(1:2));

file_type = H5T.create('H5T_COMPOUND',sum(sz));

H5T.insert(file_type,'a', offset(1), dtype(1));
H5T.insert(file_type,'b', offset(2), dtype(2));
H5T.insert(file_type,'c', offset(3), dtype(3));
```

See Also

See Also

H5T.get_size

H5O.close

Close object

Syntax

```
H5O.close(obj_id)
```

Description

`H5O.close(obj_id)` closes the object specified by `obj_id`. `obj_id` cannot be a dataspace, attribute, property list, or file.

H5O.copy

Copy object from source location to destination location

Syntax

```
H5O.copy(src_loc_id,src_name,dst_loc_id,dst_name,ocpypl_id,lcpl_id)
```

Description

`H5O.copy(src_loc_id,src_name,dst_loc_id,dst_name,ocpypl_id,lcpl_id)` copies the group, dataset or named datatype specified by `src_name` from the file or group specified by `src_loc_id` to the destination location `dst_loc_id`.

The destination location, as specified in `dst_loc_id`, may be a group in the current file or a location in a different file. If `dst_loc_id` is a file identifier, the copy will be placed in that file's root group.

The new copy will be created with the name `dst_name`. `dst_name` must not pre-exist in the destination location. If `dst_name` already exists at the location `dst_loc_id`, the operation will fail.

The new copy of the object is created with the object creation property and link creation property lists `ocpypl_id` and `lcpl_id`, respectively.

Examples

Copy the group `'/g3'` and all its datasets to a new group `'/g3.5'`.

```
srcFile = [matlabroot '/toolbox/matlab/demos/example.h5'];
copyfile(srcFile,'myfile.h5');
fileattrib('myfile.h5','+w');
ocpl = H5P.create('H5P_OBJECT_COPY');
lcpl = H5P.create('H5P_LINK_CREATE');
H5P.set_create_intermediate_group(lcpl,true);
fid = H5F.open('myfile.h5','H5F_ACC_RDWR','H5P_DEFAULT');
gid = H5G.open(fid,'/');
```

```
H5O.copy(gid,'g3',gid,'g3.5',ocpl,lcpl);
H5G.close(gid);
H5P.close(ocpl);
H5P.close(lcpl);
H5F.close(fid);
```

H5O.get_comment

Get comment for object specified by object identifier

Syntax

```
comment = H5O.get_comment(obj_id)
```

Description

`comment = H5O.get_comment(obj_id)` retrieves the comment for the object specified by `obj_id`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'g4/world');
comment = H5O.get_comment(dset_id);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5O.get_comment_by_name` | `H5O.set_comment` | `H5O.set_comment_by_name`

H5O.get_comment_by_name

Get comment for object specified by location and object name

Syntax

```
comment = H5O.get_comment_by_name(loc_id,name,lapl_id)
```

Description

`comment = H5O.get_comment_by_name(loc_id,name,lapl_id)` retrieves a comment where a location id and name together specify the object. A link access property list can affect the outcome if a link is traversed to access the object.

Examples

```
fid = H5F.open('example.h5','H5F_ACC_RDONLY','H5P_DEFAULT');
comment = H5O.get_comment_by_name(fid,'g4/world','H5P_DEFAULT');
H5F.close(fid);
```

See Also

See Also

`H5O.get_comment` | `H5O.set_comment` | `H5O.set_comment_by_name`

H5O.get_info

Object metadata

Syntax

```
info = H5O.get_info(obj_id)
```

Description

`info = H5O.get_info(obj_id)` retrieves the metadata for an object specified by `obj_id`. For details about the object metadata, please refer to the HDF5 documentation.

Examples

Determine the number of attributes for a dataset.

```
fid = H5F.open('example.h5','H5F_ACC_RDONLY','H5P_DEFAULT');
dsetId = H5D.open(fid,'/g1/g1.1/dset1.1.1');
info = H5O.get_info(dsetId);
info.num_attrs
```

Determine the type of objects in the root group.

```
plist = 'H5P_DEFAULT';
fid = H5F.open('example.h5');
gid = H5G.open(fid,'/');
root_info = H5G.get_info(gid);
idx_type = 'H5_INDEX_NAME';
order = 'H5_ITER_DEC';
for j = 0:root_info.nlinks-1
   obj_id = H5O.open_by_idx(fid,'/',idx_type,order,j,plist);
   obj_info = H5O.get_info(obj_id);
   switch(obj_info.type)
       case H5ML.get_constant_value('H5G_LINK')
           fprintf('Object #%d is a link.\n',j);
       case H5ML.get_constant_value('H5G_GROUP')
           fprintf('Object #%d is a group.\n',j);
```

```
        case H5ML.get_constant_value('H5G_DATASET')
            fprintf('Object #%d is a dataset.\n',j);
        case H5ML.get_constant_value('H5G_TYPE')
            fprintf('Object #%d is a named datatype.\n',j);
    end
    H5O.close(obj_id);
end
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

H5D.open | H5F.open | H5G.open | H5T.open

H5O.link

Create hard link to specified object

Syntax

```
H5O.link(obj_id,new_loc_id,new_link_name,lcpl_id,lapl_id)
```

Description

`H5O.link(obj_id,new_loc_id,new_link_name,lcpl_id,lapl_id)` creates a hard link to an object, where `new_loc_id` and `new_link_name` specify the location. `lcpl_id` and `lapl_id` are the link creation and access property lists associated with the new link.

`H5O.link` is designed to add additional structure to an existing file so that, for example, an object can be shared among multiple groups.

Examples

Create a hard link from group `'/g2'` to the dataset `'/g1/ds1'`.

```
plist_id = 'H5P_DEFAULT';
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',plist_id,plist_id);
gid1 = H5G.create(fid,'/g1',plist_id);
space_id = H5S.create_simple(1,10,[]);
ds1 = H5D.create(gid1,'ds1','H5T_NATIVE_INT',space_id,plist_id);
gid2 = H5G.create(fid,'/g2',plist_id);
H5O.link(ds1,gid2,'ds2',plist_id,plist_id);
H5D.close(ds1);
H5S.close(space_id);
H5G.close(gid2); H5G.close(gid1);
H5F.close(fid);
```

See Also

See Also

`H5L.create_hard` | `H5L.create_soft`

H5O.open

Open specified object

Syntax

```
obj_id = H5O.open(loc_id,relname,lapl_id)
```

Description

`obj_id = H5O.open(loc_id,relname,lapl_id)` opens an object specified by location identifier and relative path name. `lapl_id` is the link access property list associated with the link pointing to the object. If default link access properties are appropriate, this can be passed in as `'H5P_DEFAULT'`.

Examples

```
fid = H5F.open('example.h5');
obj_id = H5O.open(fid,'g3','H5P_DEFAULT');
H5O.close(obj_id);
H5F.close(fid);
```

See Also

See Also

`H5O.close` | `H5O.open_by_idx`

H5O.open_by_idx

Open object specified by index

Syntax

```
obj_id = H5O.open_by_idx(loc_id, group_name, idx_type, order, n,
lapl_id)
```

Description

`obj_id = H5O.open_by_idx(loc_id, group_name, idx_type, order, n, lapl_id)` opens the `n`-th object in the group specified by `loc_id` and `group_name`. `loc_id` specifies a file or group. `group_name` specifies the group relative to `loc_id` in which the object can be found.

Two parameters are used to establish the iteration: `index_type` and `order`. `index_type` specifies the type of index by which objects are ordered. Valid values include the following:

`'H5_INDEX_NAME'`	Alpha-numeric index on name
`'H5_INDEX_CRT_ORDER'`	Index on creation order

`order` specifies the order in which the links are to be referenced for the purposes of this function. Valid values include the following:

`'H5_ITER_INC'`	Increasing order
`'H5_ITER_DEC'`	Decreasing order
`'H5_ITER_NATIVE'`	Fastest available order

`n` specifies the zero-based position of the object within the index. `lapl_id` specifies the link access property list to be used in accessing the object.

Examples

```
fid = H5F.open('example.h5');
```

```
idx_type = 'H5_INDEX_NAME';
order = 'H5_ITER_DEC';
obj_id = H5O.open_by_idx(fid,'g3',idx_type,order,0,'H5P_DEFAULT');
H5O.close(obj_id);
H5F.close(fid);
```

See Also

See Also

H5O.close | H5O.open

H5O.set_comment

Set comment for object specified by object identifier

Syntax

```
H5O.set_comment(obj_id,comment)
```

Description

`H5O.set_comment(obj_id,comment)` sets a comment for the object specified by `obj_id`.

Examples

```
plist = 'H5P_DEFAULT';
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',plist,plist);
gid = H5G.create(fid,'/g1',plist);
H5O.set_comment(gid,'This is a group comment.');
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5O.get_comment` | `H5O.get_comment_by_name` | `H5O.set_comment_by_name`

H5O.set_comment_by_name

Set comment for object specified by location and object name

Syntax

```
H5O.set_comment_by_name(loc_id,rel_name,comment,lapl_id)
```

Description

`H5O.set_comment_by_name(loc_id,rel_name,comment,lapl_id)` sets a comment for an object specified by a location ID and a relative name. `lapl_id` is a link access property list identifier that can affect the outcome if links are traversed.

Examples

```
plist = 'H5P_DEFAULT';
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',plist,plist);
gid = H5G.create(fid,'/g1',plist);
H5O.set_comment_by_name(fid,'g1','This is a group comment.',plist);
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5O.get_comment` | `H5O.get_comment_by_name` | `H5O.set_comment`

H5O.visit

Visit objects specified by object identifier

Syntax

```
[status,opdata_out] =
H5O.visit(obj_id,index_type,order,iter_func,opdata_in)
```

Description

`[status,opdata_out] = H5O.visit(obj_id,index_type,order,iter_func,opdata_in)` is a recursive iteration function to visit the object `object_id` and, if `object_id` is a group, all objects in and below it in an HDF5 file. This provides a mechanism for an application to perform a common set of operations across all of those objects or a dynamically selected subset.

If `object_id` is a group identifier, that group serves as the root of a recursive iteration. If `object_id` is a file identifier, that file's root group serves as the root of the recursive iteration. If `object_id` is any other type of object, such as a dataset or named data type, there is no iteration.

Two parameters are used to establish the iteration: `index_type` and `order`. The `index_type` parameter specifies the index used. If the links in a group have not been indexed by the index type, they are first sorted by that index, and then the iteration will begin. If the links have been so indexed, the sorting step is unnecessary, so the iteration can begin more quickly. Valid values include the following.

`'H5_INDEX_NAME'`	Alpha-numeric index on name
`'H5_INDEX_CRT_ORDER'`	Index on creation order

Note that the index type passed in `index_type` is a best effort setting. If the application passes in a value indicating iteration in creation order and a group is encountered that was not tracked in creation order, that group will be iterated over in alpha-numeric order by name, or name order. (Name order is the native order used by the HDF5 Library and is always available.) `order` specifies the order in which objects are to be inspected along the index specified in `index_type`. Valid values include the following.

`'H5_ITER_INC'`	Increasing order
`'H5_ITER_DEC'`	Decreasing order
`'H5_ITER_NATIVE'`	Fastest available order

The callback function `iter_func` must have the following signature:

```
function [status,opdata_out] = iter_func(group_id,name,opdata_in)
```

`opdata_in` is a user-defined value or structure and is passed to the first step of the iteration in the `iter_func` `opdata_in` parameter. The `opdata_out` of an iteration step forms the `opdata_in` for the next iteration step. The final `opdata_out` at the end of the iteration is then returned to the caller as `opdata_out`.

`status` value returned by `iter_func` is interpreted as follows.

zero	Continues with the iteration or returns zero status value to the caller if all members have been processed
positive	Stops the iteration and returns the positive status value to the caller
negative	Stops the iteration and throws an error indicating failure

See Also

See Also

`H5O.visit_by_name`

H5O.visit_by_name

Visit objects specified by location and object name

Syntax

```
[status,opdata_out] =
H5O.visit_by_name(loc_id,obj_name,index_type,order,iter_func,opdata_in,lapl_id
```

Description

`[status,opdata_out] =`
`H5O.visit_by_name(loc_id,obj_name,index_type,order,iter_func,opdata_in,lapl_id`
specifies the object by the pairing of the location identifier and object name. `loc_id` specifies a file or an object in a file and `obj_name` specifies an object in the file with either an absolute name or relative to `loc_id`. A link access property list can affect the outcome if links are involved.

Two parameters are used to establish the iteration: `index_type` and `order`. The `index_type` parameter specifies the index to be used. If the links in a group have not been indexed by the index type, they are first sorted by that index, and then the iteration will begin; if the links have been so indexed, the sorting step is unnecessary, so the iteration can begin more quickly. Valid values include the following.

`'H5_INDEX_NAME'`	Alpha-numeric index on name
`'H5_INDEX_CRT_ORDER'`	Index on creation order

Note that the index type passed in `index_type` is a best effort setting. If the application passes in a value indicating iteration in creation order and a group is encountered that was not tracked in creation order, that group will be iterated over in alpha-numeric order by name, or name order. (Name order is the native order used by the HDF5 Library and is always available.) `order` specifies the order in which objects are to be inspected along the index specified in `index_type`. Valid values include the following.

`'H5_ITER_INC'`	Increasing order
`'H5_ITER_DEC'`	Decreasing order

`'H5_ITER_NATIVE'`	Fastest available order

The callback function `iter_func` must have the following signature:

```
function [status,opdata_out] = iter_func(group_id,name,opdata_in)
```

`opdata_in` is a user-defined value or structure and is passed to the first step of the iteration in the `iter_func` `opdata_in` parameter. The `opdata_out` of an iteration step forms the `opdata_in` for the next iteration step. The final `opdata_out` at the end of the iteration is then returned to the caller as `opdata_out`.

`lapl_id` is a link access property list. When default link access properties are acceptable, `'H5P_DEFAULT'` can be used.

`status` value returned by `iter_func` is interpreted as follows.

zero	Continues with the iteration or returns zero status value to the caller if all members have been processed
positive	Stops the iteration and returns the positive status value to the caller
negative	Stops the iteration and throws an error indicating failure

See Also

See Also

`H5O.visit`

H5P.close

Close property list

Syntax

```
H5P.close(plist_id)
```

Description

`H5P.close(plist_id)` terminates access to the property list specified by `plist_id`.

See Also

See Also

`H5P.create`

H5P.copy

Copy of property list

Syntax

```
plist_copy = H5P.copy(plist_id)
```

Description

`plist_copy = H5P.copy(plist_id)` returns a copy of the property list specified by `plist_id`.

Examples

Make a copy of the file creation property list for `'example.h5'`.

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
fcpl2 = H5P.copy(fcpl);
```

H5P.create

Create new property list

Syntax

```
plist = H5P.create(class_id)
```

Description

`plist = H5P.create(class_id)` creates a new property list as an instance of the property list class specified by `class_id`. The `class_id` input can be one of the following character vectors or the corresponding constant value.

```
'H5P_ATTRIBUTE_CREATE'
'H5P_DATASET_ACCESS'
'H5P_DATASET_CREATE'
'H5P_DATASET_XFER'
'H5P_DATATYPE_CREATE'
'H5P_DATATYPE_ACCESS'
'H5P_FILE_MOUNT'
'H5P_FILE_CREATE'
'H5P_FILE_ACCESS'
'H5P_GROUP_CREATE'
'H5P_GROUP_ACCESS'
'H5P_LINK_CREATE'
'H5P_LINK_ACCESS'
'H5P_OBJECT_COPY'
'H5P_OBJECT_CREATE'
'H5P_STRING_CREATE'
```

`class_id` can also be an instance of a property list class.

Examples

```
fapl = H5P.create('H5P_FILE_ACCESS');
fid = H5F.open('example.h5','H5F_ACC_RDONLY',fapl);
```

See Also

See Also

H5ML.get_constant_value | H5P.close | H5P.get_class

H5P.get_class

Property list class

Syntax

```
plist_class = H5P.get_class(plist_id)
```

Description

`plist_class = H5P.get_class(plist_id)` returns the property list class for the property list specified by `plist_id`.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
pclass = H5P.get_class(fcpl);
name = H5P.get_class_name(pclass);
```

See Also

See Also

`H5P.get_class_name`

H5P.close_class

Close property list class

Syntax

```
H5P.close_class(class)
```

Description

`H5P.close_class(class)` closes the property list class specified by `pclass_id`.

H5P.equal

Determine equality of property lists

Syntax

```
value = H5P.equal(plist1_id, plist2_id)
```

Description

`value = H5P.equal(plist1_id, plist2_id)` returns a positive number if the two property lists specified are equal, and zero if they are not. A negative value indicates failure.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
fcpl = H5F.get_create_plist(fid);
if H5P.equal(fapl,fcpl)
    fprintf('property lists are equal\n');
else
    fprintf('property lists are not equal\n');
end
```

H5P.exist

Determine if specified property exists in property list

Syntax

```
value = H5P.exist(prop_id, name)
```

Description

`value = H5P.exist(prop_id, name)` returns a positive value if the property specified by the character vector `name` exists within the property list or class specified by `prop_id`.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
if H5P.exist(fapl,'sieve_buf_size')
    fprintf('sieve buffer size property exists\n');
else
    fprintf('sieve buffer size property does not exist\n');
end
```

H5P.get

Value of specified property in property list

Syntax

```
value = H5P.get(plist_id, name)
```

Description

`value = H5P.get(plist_id, name)` retrieves a copy of the value of the property specified by the character vector `name` in the property list specified by `plist_id`. The `H5P.get` function returns the property as an array of `uint8` values. You might need to cast the value to an appropriate data type to get a meaningful result.

Examples

```
plist = H5P.create('H5P_FILE_ACCESS');
val = H5P.get(plist, 'rdcc_w0');
rdcc_w0 = typecast(val,'double');
```

It is recommended to use alternative functions like `H5P.get_chunk`, `H5P.get_layout`, `H5P.get_size` etc., where available, to get values for the common property names.

See Also

See Also

`H5P.set` | `typecast`

H5P.get_class_name

Name of property list class

Syntax

```
classname = H5P.get_class_name(pclass_id)
```

Description

`classname = H5P.get_class_name(pclass_id)` retrieves the name of the generic property list class. `classname` is a character vector. If no class is found, an empty character vector is returned.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
pclass = H5P.get_class(fcpl);
name = H5P.get_class_name(pclass);
```

See Also

See Also

`H5P.get_class`

H5P.get_class_parent

Identifier for parent class

Syntax

```
pclass_obj_id = H5P.get_class_parent(pclass_id)
```

Description

`pclass_obj_id = H5P.get_class_parent(pclass_id)` returns an identifier to the parent class object of the property class specified by `pclass_id`.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
fcpl_class = H5P.get_class(fcpl);
parent_class = H5P.get_class_parent(fcpl_class);
name = H5P.get_class_name(parent_class);
```

See Also

See Also

`H5P.get_class` | `H5P.get_class_name`

H5P.get_nprops

Query number of properties in property list or class

Syntax

```
nprops = H5P.get_nprops(id)
```

Description

`nprops = H5P.get_nprops(id)` returns the number of properties in the property list or class specified by `id`.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
nprops = H5P.get_nprops(fcpl);
```

H5P.get_size

Query size of property value in bytes

Syntax

```
sz = H5P.get_size(id,name)
```

Description

`sz = H5P.get_size(id,name)` returns the size, in bytes, of the property specified by the character vector `name` in the property list or property class specified by `id`.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
sz = H5P.get_size(fapl,'sieve_buf_size');
```

H5P.isa_class

Determine if property list is member of class

Syntax

```
output = H5P.isa_class(plist_id, pclass_id)
```

Description

`output = H5P.isa_class(plist_id, pclass_id)` returns a positive number if the property list specified by `plist_id` is a member of the class specified by `pclass_id`, zero if it is not, and a negative value to indicate an error.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
if H5P.isa_class(fcpl,'H5P_FILE_ACCESS')
    fprintf('fcpl is a file access property list\n');
else
    fprintf('fcpl is not a file access property list\n');
end
```

See Also

See Also

`H5P.get_class`

H5P.iterate

Iterate over properties in property list

Syntax

```
[output,idx_out] = H5P.iterate(id,idx_in,iter_func)
```

Description

`[output,idx_out] = H5P.iterate(id,idx_in,iter_func)` executes the operation `iter_func` on each property in the property object specified in `id`. The `id` input can be a property list or a property class. `idx_in` specifies the index of the next property to be processed. `output` is the value returned by the last call to `iter_func`. `idx_out` is the index of the last property processed. `iter_func` is a function handle.

The iterator function must have the following signature:

```
status = iter_func(id,prop_name)
```

`id` still identifies the property object passed into `H5P.iterate`, but `name` identifies the name of the current property.

H5P.set

Set property list value

Syntax

```
H5P.set(plist_id,name,value)
```

Description

`H5P.set(plist_id,name,value)` sets the value of the property specified by the character vector `name` in the property list specified by `plist_id` to the value specified in `value`. The datatype of `value` must be `uint8`.

Examples

```
plist = H5P.create('H5P_FILE_ACCESS');
H5P.set(plist, 'rdcc_w0', typecast(0.8, 'uint8'));
```

It is recommended to use alternative functions like `H5P.set_chunk`, `H5P.set_layout`, `H5P.set_size`, etc., where available, to set values for the common property names.

See Also

See Also

`typecast`

H5P.get_btree_ratios

B-tree split ratios

Syntax

```
[left,middle,right] = H5P.get_btree_ratios(plist_id)
```

Description

`[left,middle,right] = H5P.get_btree_ratios(plist_id)` returns the B-tree split ratios for the dataset transfer property list specified by `plist_id`. The `left` output specifies the B-tree split ratio for left-most nodes. `right` corresponds to the right-most nodes and lone nodes, and `middle` corresponds to all other nodes.

Examples

```
dxpl = H5P.create('H5P_DATASET_XFER');
[left,middle,right] = H5P.get_btree_ratios(dxpl);
```

See Also

See Also

`H5P.set_btree_ratios`

H5P.get_chunk_cache

Raw data chunk cache parameters

Syntax

```
[rdcc_nslots,rdcc_nbytes,rdcc_w0] = H5P.get_chunk_cache(dapl_id)
```

Description

`[rdcc_nslots,rdcc_nbytes,rdcc_w0] = H5P.get_chunk_cache(dapl_id)` retrieves the number of chunk slots in the raw data chunk cache hash table (`rdcc_nslots`), the maximum possible number of bytes in the raw data chunk cache (`rdcc_nbytes`), and the preemption policy value (`rdcc_w0`) on a dataset access property list.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/vlen3D');
dapl = H5D.get_access_plist(dset_id);
[rrdcc_nslots,rdcc_nbytes,rdcc_w0] = H5P.get_chunk_cache(dapl);
H5P.close(dapl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.set_chunk_cache`

H5P.get_edc_check

Determine if error detection is enabled

Syntax

```
check = H5P.get_edc_check(plist_id)
```

Description

`check = H5P.get_edc_check(plist_id)` queries the dataset transfer property list, specified by `plist_id`, to determine whether error detection is enabled for data read operations. Returns either `H5Z_ENABLE_EDC` or `H5Z_DISABLE_EDC`.

Examples

```
dxpl = H5P.create('H5P_DATASET_XFER');
check = H5P.get_edc_check(dxpl);
switch(check)
    case H5ML.get_constant_value('H5Z_ENABLE_EDC')
        fprintf('error detection enabled\n');
    case H5ML.get_constant_value('H5Z_DISABLE_EDC');
        fprintf('error detection disabled\n');
end
```

See Also

See Also

`H5P.set_edc_check`

H5P.get_hyper_vector_size

Number of I/O vectors

Syntax

```
sz = H5P.get_hyper_vector_size(dxpl_id)
```

Description

`sz = H5P.get_hyper_vector_size(dxpl_id)` returns the number of I/O vectors to be read/written in hyperslab I/O.

Examples

```
dxpl = H5P.create('H5P_DATASET_XFER');
sz = H5P.get_hyper_vector_size(dxpl);
```

See Also

See Also

`H5P.set_hyper_vector_size`

H5P.set_btree_ratios

Set B-tree split ratios for dataset transfer

Syntax

```
H5P.set_btree_ratios(plist_id,left,middle,right)
```

Description

`H5P.set_btree_ratios(plist_id,left,middle,right)` sets the B-tree split ratios for the dataset transfer property list specified by `plist_id`. The `left` argument specifies the B-tree split ratio for left-most nodes. `right` specifies the B-tree split ratio for right-most nodes and lone nodes. `middle` specifies the B-tree split ratio for all other nodes.

Examples

```
dxpl = H5P.create('H5P_DATASET_XFER');
H5P.set_btree_ratios(dxpl, 0.2, 0.6, 0.95);
```

See Also

See Also

`H5P.get_btree_ratios`

H5P.set_chunk_cache

Set raw data chunk cache parameters

Syntax

```
H5P.set_chunk_cache(dapl_id, rdcc_nslots, rdcc_nbytes, rdcc_w0)
```

Description

`H5P.set_chunk_cache(dapl_id, rdcc_nslots, rdcc_nbytes, rdcc_w0)` sets the number of elements (`rdcc_nslots`), the total number of bytes (`rdcc_nbytes`), and the preemption policy value (`rdcc_w0`) in the raw data chunk cache.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/vlen3D');
dapl = H5D.get_access_plist(dset_id);
H5P.set_chunk_cache(dapl,500,1e6,0.7);
H5P.close(dapl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.get_chunk_cache`

H5P.set_edc_check

Enable error detection for dataset transfer

Syntax

```
H5P.set_edc_check(plist_id,check)
```

Description

`H5P.set_edc_check(plist_id,check)` sets the dataset transfer property list specified by `plist_id` to enable or disable error detection when reading data. `check` can have the value `H5Z_ENABLE_EDC` or `H5Z_DISABLE_EDC`.

Examples

Disable error detection for a default dataset transfer property list.

```
dxpl = H5P.create('H5P_DATASET_XFER');
H5P.set_edc_check(dxpl,'H5Z_DISABLE_EDC');
```

See Also

See Also

`H5P.get_edc_check`

H5P.set_hyper_vector_size

Set number of I/O vectors for hyperslab I/O

Syntax

```
H5P.set_hyper_vector_size(dxpl_id,size)
```

Description

`H5P.set_hyper_vector_size(dxpl_id,size)` sets the number of I/O vectors to be accumulated in memory before being issued to the lower levels of the HDF5 library for reading or writing the actual data. `dxpl_id` is a dataset transfer property list identifier. `size` specifies the number of I/O vectors to accumulate in memory for I/O operations.

Examples

```
dxpl = H5P.create('H5P_DATASET_XFER');
H5P.set_hyper_vector_size(dxpl,2048);
```

See Also

See Also

`H5P.get_hyper_vector_size`

H5P.all_filters_avail

Determine availability of all filters

Syntax

```
value = H5P.all_filters_avail(dcpl_id)
```

Description

`value = H5P.all_filters_avail(dcpl_id)` returns a positive value if all of the filters set in the dataset creation property list `dcpl_id` are currently available, and zero if they are not. A negative value indicates failure.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/float');
dcpl = H5D.get_create_plist(dset_id);
if H5P.all_filters_avail(dcpl)
    fprintf('all filters available\n');
else
    fprintf('all filters not available\n');
end
H5P.close(dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.set_filter`

H5P.fill_value_defined

Determine if fill value is defined

Syntax

```
fvstatus = H5P.fill_value_defined(plist_id)
```

Description

`fvstatus = H5P.fill_value_defined(plist_id)` determines whether a fill value is defined in the dataset creation property list `plist_id`. The `fvstatus` output can have any of the following values: `H5D_FILL_VALUE_UNDEFINED`, `H5D_FILL_VALUE_DEFAULT`, or `H5D_FILL_VALUE_USER_DEFINED`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/float');
dcpl = H5D.get_create_plist(dset_id);
fvstatus = H5P.fill_value_defined(dcpl);
switch(fvstatus)
    case H5ML.get_constant_value('H5D_FILL_VALUE_UNDEFINED')
        fprintf('fill value undefined\n');
    case H5ML.get_constant_value('H5D_FILL_VALUE_DEFAULT')
        fprintf('fill value set to default\n');
    case H5ML.get_constant_value('H5D_FILL_VALUE_USER_DEFINED')
        fprintf('fill value is user defined\n');
end
```

See Also

See Also

`H5P.get_fill_value` | `H5P.set_fill_value`

H5P.get_alloc_time

Return timing of storage space allocation

Syntax

```
alloc_time = H5P.get_alloc_time(plist_id)
```

Description

`alloc_time = H5P.get_alloc_time(plist_id)` retrieves the timing for storage space allocation from the dataset creation property list specified by `plist_id`. The `alloc_time` output can have any of the following values: `H5D_ALLOC_TIME_DEFAULT`, `H5D_ALLOC_TIME_EARLY`, `H5D_ALLOC_TIME_INCR`, or `H5D_ALLOC_TIME_LATE`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
dcpl = H5D.get_create_plist(dset_id);
alloc_time = H5P.get_alloc_time(dcpl);
switch(alloc_time)
    case H5ML.get_constant_value('H5D_ALLOC_TIME_DEFAULT')
        fprintf('allocation time is default\n');
    case H5ML.get_constant_value('H5D_ALLOC_TIME_EARLY')
        fprintf('allocation time is dataset creation time\n');
    case H5ML.get_constant_value('H5D_ALLOC_TIME_INCR')
        fprintf('allocation time is incremental\n');
    case H5ML.get_constant_value('H5D_ALLOC_TIME_LATE')
        fprintf('allocation time is when data is first written\n');
end
```

H5P.get_chunk

Return size of chunks

Syntax

```
[rank,h5_chunk_dims] = H5P.get_chunk(plist_id)
```

Description

`[rank,h5_chunk_dims] = H5P.get_chunk(plist_id)` retrieves the size of chunks for the raw data of a chunked layout dataset for the dataset creation property list specified by `plist_id`.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_chunk_dims` parameter assumes C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g4/time');
dcpl = H5D.get_create_plist(dset_id);
[rank,chunk_dims] = H5P.get_chunk(dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.set_chunk`

H5P.get_external

Return information about external file

Syntax

```
[name,offset,size] = H5P.get_external(plist_id,idx)
```

Description

`[name,offset,size] = H5P.get_external(plist_id,idx)` returns information about the external file specified by the dataset creation property list `plist_id`. The `idx` specifies the external file index, which is a number from zero to `N-1`, where `N` is the value returned by `H5P.get_external_count`. The `name` output returns the name of the external file (limited by 2048 characters). The `offset` output returns the location in bytes, from the beginning of the external file, where the data starts. The `size` output returns the size of the external data.

See Also

See Also

`H5P.get_external_count`

H5P.get_external_count

Return count of external files

Syntax

```
num_files = H5P.get_external_count(plist_id)
```

Description

`num_files = H5P.get_external_count(plist_id)` returns the number of external files for the dataset creation property list, `plist_id`.

See Also

See Also

`H5P.get_external`

H5P.get_fill_time

Return time when fill values are written to dataset

Syntax

```
fill_time = H5P.get_fill_time(plist_id)
```

Description

`fill_time = H5P.get_fill_time(plist_id)` returns the time when fill values are written to the dataset specified by the dataset creation property list `plist_id`. The `fill_time` output is one of the following values: `H5D_FILL_TIME_IFSET`, `H5D_FILL_TIME_ALLOC`, or `H5D_FILL_TIME_NEVER`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
dcpl = H5D.get_create_plist(dset_id);
fill_time = H5P.get_fill_time(dcpl);
switch(fill_time)
    case H5ML.get_constant_value('H5D_FILL_TIME_IFSET')
        fprintf('upon allocation if and only if fill value set by user\n');
    case H5ML.get_constant_value('H5D_FILL_TIME_ALLOC')
        fprintf('written when storage space is allocated\n');
    case H5ML.get_constant_value('H5D_FILL_TIME_NEVER')
        fprintf('fill values are never written\n');
end
```

See Also

See Also

`H5P.get_fill_time` | `H5P.set_fill_value`

H5P.get_fill_value

Return dataset fill value

Syntax

```
value = H5P.get_fill_value(plist_id,type_id)
```

Description

`value = H5P.get_fill_value(plist_id,type_id)` returns the dataset fill value defined in the dataset creation property list `plist_id`. The `type_id` input specifies the datatype of the returned fill value.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
dcpl = H5D.get_create_plist(dset_id);
type_id = H5T.copy('H5T_NATIVE_INT');
fill_value = H5P.get_fill_value(dcpl,type_id);
```

See Also

See Also

`H5P.get_fill_time` | `H5P.set_fill_time` | `H5P.set_fill_value`

H5P.get_filter

Return information about filter in pipeline

Syntax

```
[filter,flags,cd_values,name] = H5P.get_filter(plist_id,index)
[filter,flags,cd_values,name,filter_config] =
H5P.get_filter(plist_id,index)
```

Description

`[filter,flags,cd_values,name] = H5P.get_filter(plist_id,index)` returns information about the filter, specified by its filter index, in the filter pipeline, specified by the property list with which it is associated. This interface corresponds to the 1.6 version of `H5Pget_filter` in the HDF5 library.

`[filter,flags,cd_values,name,filter_config] = H5P.get_filter(plist_id,index)` returns information about the filter, specified by its filter index, in the filter pipeline, specified by the property list with which it is associated. It also returns information about the filter. Consult the HDF5 documentation for `H5Zget_filter_info` for information about `filter_config`. This interface corresponds to the 1.8 version of `H5Pget_filter` in the HDF5 library.

See Also

See Also

`H5P.get_filter_by_id` | `H5P.get_nfilters` | `H5P.modify_filter` | `H5P.remove_filter`

H5P.get_filter_by_id

Return information about specified filter

Syntax

```
[flags,cd_values,name,filter_config] =
H5P.get_filter_by_id(plist_id,idx)
```

Description

`[flags,cd_values,name,filter_config] = H5P.get_filter_by_id(plist_id,idx)` returns information about the filter specified by the filter id, `idx`.

See Also

See Also

`H5P.get_filter` | `H5P.get_nfilters` | `H5P.modify_filter` | `H5P.remove_filter`

H5P.get_layout

Determine layout of raw data for dataset

Syntax

```
layout = H5P.get_layout(dcpl)
```

Description

`layout = H5P.get_layout(dcpl)` returns the layout of the raw data for the dataset specified by the dataset creation property list, `dcpl`. Possible values are: `H5D_COMPACT`, `H5D_CONTIGUOUS`, or `H5D_CHUNKED`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
dcpl = H5D.get_create_plist(dset_id);
layout = H5P.get_layout(dcpl);
switch(layout)
    case H5ML.get_constant_value('H5D_COMPACT')
        fprintf('layout is compact\n');
    case H5ML.get_constant_value('H5D_CONTIGUOUS')
        fprintf('layout is contiguous\n');
    case H5ML.get_constant_value('H5D_CHUNKED')
        fprintf('layout is chunked\n');
end
```

See Also

See Also

`H5P.set_layout`

H5P.get_nfilters

Return number of filters in pipeline

Syntax

```
num_filters = H5P.get_nfilters(plist_id)
```

Description

`num_filters = H5P.get_nfilters(plist_id)` returns the number of filters defined in the filter pipeline associated with the dataset creation property list, `plist_id`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g4/world');
dcpl = H5D.get_create_plist(dset_id);
num_filters = H5P.get_nfilters(dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.get_filter` | `H5P.get_filter_by_id` | `H5P.modify_filter` | `H5P.remove_filter`

H5P.modify_filter

Modify filter in pipeline

Syntax

```
H5P.modify_filter(plist_id,filter_id,flags,cd_values)
```

Description

`H5P.modify_filter(plist_id,filter_id,flags,cd_values)` modifies the specified filter in the filter pipeline. `plist_id` is a property list identifier. `flags` is a bit vector specifying certain general properties of the filter. `cd_values` specifies auxiliary data for the filter.

See Also

See Also

`H5P.get_filter` | `H5P.get_filter_by_id` | `H5P.get_nfilters` | `H5P.remove_filter`

H5P.remove_filter

Remove filter from property list

Syntax

```
H5P.remove_filter(plist_id,filter)
```

Description

`H5P.remove_filter(plist_id,filter)` removes the specified filter from the filter pipeline. `plist_id` is the dataset creation property list identifier.

See Also

See Also

`H5P.get_filter` | `H5P.get_filter_by_id` | `H5P.get_nfilters` | `H5P.modify_filter`

H5P.set_alloc_time

Set timing for storage space allocation

Syntax

```
H5P.set_alloc_time(plist_id,alloc_time)
```

Description

`H5P.set_alloc_time(plist_id,alloc_time)` sets the timing for the allocation of storage space for a dataset's raw data. `plist_id` is a dataset creation property list. `alloc_time` can have any of the following values: `H5D_ALLOC_TIME_DEFAULT`, `H5D_ALLOC_TIME_EARLY`, `H5D_ALLOC_TIME_INC`, or `H5D_ALLOC_TIME_LATE`.

Examples

Create a 1000x500 double precision dataset with late allocation time.

```
fid = H5F.create('myfile.h5');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [1000 500];
h5_dims = fliplr(dims);
h5_maxdims = h5_dims;
space_id = H5S.create_simple(2,h5_dims,h5_maxdims);
dcpl = H5P.create('H5P_DATASET_CREATE');
alloc_time = H5ML.get_constant_value('H5D_ALLOC_TIME_LATE');
H5P.set_alloc_time(dcpl,alloc_time);
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.get_alloc_time`

H5P.set_chunk

Set chunk size

Syntax

```
H5P.set_chunk(plist_id,h5_chunk_dims)
```

Description

`H5P.set_chunk(plist_id,h5_chunk_dims)` sets the size of the chunks used to store a chunked layout dataset. `plist_id` is a dataset creation property list identifier. `h5_chunk_dims` is an array specifying the size, in dataset elements, of each chunk.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_chunk_dims` parameter assumes C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

Create a two dimensional double precision dataset that has an initial size of [512 1024], but is also unlimited in both dimensions and has a chunk size of [512 1024].

```
fid = H5F.create('myfile.h5');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
unlimited = H5ML.get_constant_value('H5S_UNLIMITED');
dims = [512 1024];
h5_dims = fliplr(dims);
h5_maxdims = [unlimited unlimited];
space_id = H5S.create_simple(2,[1024 512],h5_maxdims);
dcpl = H5P.create('H5P_DATASET_CREATE');
chunk_dims = [512 1024];
h5_chunk_dims = fliplr(chunk_dims);
H5P.set_chunk(dcpl,h5_chunk_dims);
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
```

```
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

H5P.get_chunk

H5P.set_deflate

Set compression method and compression level

Syntax

```
H5P.set_deflate(plist_id,level)
```

Description

`H5P.set_deflate(plist_id,level)` sets the compression method for the dataset creation property list specified by `plist_id` to `H5D_COMPRESS_DEFLATE`. `level` specifies the compression level as a value from 0 and 9, inclusive. Lower values results in less compression.

Examples

Create a two dimensional double precision dataset that has an initial size of [512 1024], but is also unlimited in both dimensions and has a chunk size of [512 1024] and a compression level of 5.

```
fid = H5F.create('myfile.h5');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
unlimited = H5ML.get_constant_value('H5S_UNLIMITED');
dims = [512 1024];
h5_dims = fliplr(dims);
h5_maxdims = [unlimited unlimited];
space_id = H5S.create_simple(2,[1024 512],h5_maxdims);
dcpl = H5P.create('H5P_DATASET_CREATE');
chunk_dims = [512 1024];
h5_chunk_dims = fliplr(chunk_dims);
H5P.set_chunk(dcpl,h5_chunk_dims);
H5P.set_deflate(dcpl,5);
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

H5P.set_external

Add additional file to external file list

Syntax

```
H5P.set_external(plist_id,name,offset,nbytes)
```

Description

`H5P.set_external(plist_id,name,offset,nbytes)` adds the external file specified by `name` to the list of external files in the dataset creation property list, `plist_id`. The `offset` argument specifies the location, in bytes, where the data starts relative to the beginning of the file. `nbytes` is the number of bytes reserved in the file for the data. `nbytes` may also be given as `'H5F_UNLIMITED'`, in which case the external file may be of unlimited size.

Examples

Create a dataset with an unlimited size external file.

```
fid = H5F.create('myfile.h5');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [100 50];
h5_dims = fliplr(dims);
h5_maxdims = h5_dims;
space_id = H5S.create_simple(2,h5_dims,h5_maxdims);
dcpl = H5P.create('H5P_DATASET_CREATE');
H5P.set_external(dcpl,'myexternalfile.dat',0,'H5F_UNLIMITED');
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
data = rand(dims);
dxpl = 'H5P_DEFAULT';
H5D.write(dset_id,'H5ML_DEFAULT','H5S_ALL','H5S_ALL',dxpl,data);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5ML.get_constant_value` | `H5P.get_external`

H5P.set_fill_time

Set time when fill values are written to dataset

Syntax

```
H5P.set_fill_time(plist_id,fill_time)
```

Description

`H5P.set_fill_time(plist_id,fill_time)` sets the timing for writing fill values to a dataset in the dataset creation property list `plist_id`. The timing can be specified by one of the following values: `H5D_FILL_TIME_IFSET`, `H5D_FILL_TIME_ALLOC`, or `H5D_FILL_TIME_NEVER`.

Examples

```
fid = H5F.create('myfile.h5');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [100 50];
h5_dims = fliplr(dims);
h5_maxdims = h5_dims;
space_id = H5S.create_simple(2,h5_dims,h5_maxdims);
dcpl = H5P.create('H5P_DATASET_CREATE');
fill_time = H5ML.get_constant_value('H5D_FILL_TIME_ALLOC');
H5P.set_fill_time(dcpl,fill_time);
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.get_fill_time` | `H5P.get_fill_value` | `H5P.set_fill_value`

H5P.set_fill_value

Set fill value for dataset creation property list

Syntax

```
H5P.set_fill_value(plist_id,type_id,value)
```

Description

`H5P.set_fill_value(plist_id,type_id,value)` sets the fill value for a the dataset creation property list specified by `plist_id`. The `value` argument specifies the fill value. `type_id` specifies the datatype of the fill value. Setting `value` to an empty array indicates that the fill value is to be undefined.

Examples

Create a double precision dataset with a fill value of -999.

```
fid = H5F.create('myfile.h5');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [100 50];
h5_dims = fliplr(dims);
h5_maxdims = h5_dims;
space_id = H5S.create_simple(2,h5_dims,h5_maxdims);
dcpl = H5P.create('H5P_DATASET_CREATE');
fill_time = H5ML.get_constant_value('H5D_FILL_TIME_ALLOC');
H5P.set_fill_time(dcpl,fill_time);
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
H5P.set_fill_value(dcpl,type_id,-999);
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

H5P.set_filter

Add filter to filter pipeline

Syntax

```
H5P.set_filter(plist_id,filter,flags,cd_values)
```

Description

`H5P.set_filter(plist_id,filter,flags,cd_values)` adds the specified filter and corresponding properties to the end of an output filter pipeline. `plist_id` is a property list identifier. `filter` is a filter identifier and should correspond to one of the following values:

```
H5P_FILTER_DEFLATE
H5P_FILTER_SHUFFLE
H5P_FILTER_FLETCHER32
```

`flags` is a bit vector specifying properties of the filter. `cd_values` is an array that contains auxiliary data for the filter.

See Also

See Also

`H5P.set_deflate` | `H5P.set_fletcher32` | `H5P.set_shuffle`

H5P.set_fletcher32

Set Fletcher32 checksum filter in dataset creation

Syntax

```
H5P.set_fletcher32(plist_id)
```

Description

`H5P.set_fletcher32(plist_id)` sets the Fletcher32 checksum filter in the dataset creation property list specified by `plist_id`. The dataset creation property list must also have chunking enabled.

Examples

```
fid = H5F.create('myfile.h5');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,dims,[]);
dcpl = H5P.create('H5P_DATASET_CREATE');
chunk_dims = [10 20];
h5_chunk_dims = fliplr(chunk_dims);
H5P.set_chunk(dcpl,h5_chunk_dims);
H5P.set_fletcher32(dcpl);
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.set_deflate` | `H5P.set_shuffle`

H5P.set_layout

Set type of storage for dataset

Syntax

```
H5P.set_layout(dcpl,layout)
```

Description

`H5P.set_layout(dcpl,layout)` sets the type of storage used to store the raw data for the dataset creation property list, `dcpl`. The `layout` argument specifies the type of storage layout for raw data: `H5D_COMPACT`, `H5D_CONTIGUOUS`, or `H5D_CHUNKED`.

Examples

```
fid = H5F.create('myfile.h5');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,dims,[]);
dcpl = H5P.create('H5P_DATASET_CREATE');
layout = H5ML.get_constant_value('H5D_CONTIGUOUS');
H5P.set_layout(dcpl,layout);
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.get_layout` | `H5P.set_chunk`

H5P.set_nbit

Set N-Bit filter

Syntax

```
H5P.set_nbit(plist_id)
```

Description

`H5P.set_nbit(plist_id)` sets the N-Bit filter, `H5Z_FILTER_NBIT`, in the dataset creation property list `plist_id`.

H5P.set_scaleoffset

Set Scale-Offset filter

Syntax

```
H5P.set_scaleoffset(plistId,scaleType,scaleFactor)
```

Description

`H5P.set_scaleoffset(plistId,scaleType,scaleFactor)` sets the Scale-Offset filter, `H5Z_FILTER_SCALEOFFSET`, for a dataset. For integer data types, the parameter `scaleType` should be set to the enumerated value `H5Z_SO_INT`. For floating-point data types, the `scaleType` should be the enumerated value `H5Z_SO_FLOAT_DSCALE`. Chunking must already be enabled on the dataset creation property list.

See Also

See Also

`H5P.set_chunk`

H5P.set_shuffle

Set shuffle filter

Syntax

```
H5P.set_shuffle(plist_id)
```

Description

`H5P.set_shuffle(plist_id)` sets the shuffle filter, `H5Z_FILTER_SHUFFLE`, in the dataset creation property list `plist_id`. Compression must be enabled on the dataset creation property list in order to use the shuffle filter, and best results are usually obtained when the shuffle filter is set immediately prior to setting the deflate filter.

Examples

```
fid = H5F.create('myfile.h5');
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,dims,[]);
dcpl = H5P.create('H5P_DATASET_CREATE');
chunk_dims = [10 20];
h5_chunk_dims = fliplr(chunk_dims);
H5P.set_chunk(dcpl,h5_chunk_dims);
H5P.set_shuffle(dcpl);
H5P.set_deflate(dcpl,5);
dset_id = H5D.create(fid,'DS',type_id,space_id,dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.set_deflate`

H5P.get_alignment

Retrieve alignment properties

Syntax

```
[threshold,alignment] = H5P.get_alignment(plist_id)
```

Description

`[threshold,alignment] = H5P.get_alignment(plist_id)` retrieves the current settings for alignment properties from the file access property list specified by `plist_id`.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
[threshold,alignment] = H5P.get_alignment(fapl);
H5P.close(fapl);
H5F.close(fid);
```

H5P.get_driver

Low-level file driver

Syntax

```
driver_id = H5P.get_driver(plist_id)
```

Description

`driver_id = H5P.get_driver(plist_id)` returns the identifier of the low-level file driver associated with the file access property list or data transfer property list specified by `plist_id`. See HDF5 documentation for a list of valid return values.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
driver_id = H5P.get_driver(fapl);
if ( driver_id == H5ML.get_constant_value('H5FD_SEC2') )
    fprintf('File driver is H5FD_SEC2.\n');
end
H5P.close(fapl);
H5F.close(fid);
```

See Also

See Also

`H5ML.get_constant_value`

H5P.get_family_offset

Offset for family file driver

Syntax

```
offset = H5P.get_family_offset(fapl_id)
```

Description

`offset = H5P.get_family_offset(fapl_id)` retrieves the value of offset from the file access property list, `fapl_id`. `offset` is the offset of the data in the HDF5 file that is stored on disk in the selected member file in a family of files.

See Also

See Also

`H5P.set_family_offset`

H5P.get_fapl_core

Information about core file driver properties

Syntax

```
[increment,backing_store] = H5P.get_fapl_core(fapl_id)
```

Description

`[increment,backing_store] = H5P.get_fapl_core(fapl_id)` queries the `H5FD_CORE` driver properties as set by `H5P.set_fapl_core`. The `fapl_id` argument specifies a file access property list. The return value `increment` specifies the size, in bytes, of memory increments. `backing_store` is a Boolean flag indicating whether to write the file contents to disk when the file is closed.

See Also

See Also

`H5P.set_fapl_core`

H5P.get_fapl_family

File access property list information

Syntax

```
[memb_size,memb_fapl_id] = H5P.get_fapl_family(fapl_id)
```

Description

`[memb_size,memb_fapl_id] = H5P.get_fapl_family(fapl_id)` returns the size in bytes of each file member and the identifier of the file access property list for use with the family driver specified by `fapl_id`.

See Also

See Also

`H5P.set_fapl_family`

H5P.get_fapl_multi

Information about multifile access property list

Syntax

```
[memb_map,memb_fapl,memb_name,memb_addr,relax] =
H5P.get_fapl_multi(fapl_id)
```

Description

`[memb_map,memb_fapl,memb_name,memb_addr,relax] = H5P.get_fapl_multi(fapl_id)` returns information about the multifile access property list specified by `fapl_id`. The `memb_map` output maps memory usage types to other memory usage types. `memb_fapl` is a property list for each memory usage type. `memb_name` is the name generator for names of member files. `relax` is a Boolean value that, when non-zero, allows read-only access to incomplete file sets.

See Also

See Also

`H5P.set_fapl_multi`

H5P.get_fclose_degree

File close degree

Syntax

```
degree = H5P.get_fclose_degree(fapl_id)
```

Description

`degree = H5P.get_fclose_degree(fapl_id)` returns the current setting of the file close degree property `fc_degree` in the file access property list specified by `fapl_id`. Possible return values are: `H5F_CLOSE_DEFAULT`, `H5F_CLOSE_WEAK`, `H5F_CLOSE_SEMI`, or `H5F_CLOSE_STRONG`.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
degree = H5P.get_fclose_degree(fapl);
switch(degree)
    case H5ML.get_constant_value('H5F_CLOSE_DEFAULT')
        fprintf('file close degree is default\n');
    case H5ML.get_constant_value('H5F_CLOSE_WEAK')
        fprintf('file close degree is weak\n');
    case H5ML.get_constant_value('H5F_CLOSE_SEMI')
        fprintf('close degree is semi\n');
    case H5ML.get_constant_value('H5F_CLOSE_STRONG')
        fprintf('close degree is strong\n');
end
H5P.close(fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.set_fclose_degree`

H5P.get_libver_bounds

Library version bounds settings

Syntax

```
[low,high] = H5P.get_libver_bounds(fapl_id)
```

Description

`[low,high] = H5P.get_libver_bounds(fapl_id)` gets bounds on library version bounds settings that control the format versions used when creating objects in the file with access property list `fapl_id`.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
[low,high] = H5P.get_libver_bounds(fapl);
```

See Also

See Also

`H5F.get_access_plist` | `H5P.set_libver_bounds`

H5P.get_gc_references

Garbage collection references setting

Syntax

```
gc_ref = H5P.get_gc_references(fapl_id)
```

Description

`gc_ref = H5P.get_gc_references(fapl_id)` returns the current setting for the garbage collection references property from the file access property list specified by `fapl_id`. If `gc_ref` is `1`, garbage collection is on; if `0`, garbage collection is off.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
gc_ref = H5P.get_gc_references(fapl);
H5P.close(fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.set_gc_references`

H5P.get_mdc_config

Metadata cache configuration

Syntax

```
config_struct = H5P.get_mdc_config(plist_id)
```

Description

`config_struct = H5P.get_mdc_config(plist_id)` returns the current metadata cache configuration from the indicated file access property list.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
config = H5P.get_mdc_config(fapl);
H5P.close(fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.set_mdc_config`

H5P.get_meta_block_size

Metadata block size setting

Syntax

```
sz = H5P.get_meta_block_size(fapl_id)
```

Description

`sz = H5P.get_meta_block_size(fapl_id)` returns the current minimum size, in bytes, of new metadata block allocations.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
sz = H5P.get_meta_block_size(fapl);
H5P.close(fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.set_meta_block_size`

H5P.get_multi_type

Type of data property for MULTI driver

Syntax

```
type = H5P.get_multi_type(fapl_id)
```

Description

`type = H5P.get_multi_type(fapl_id)` returns the type of data setting from the file access or data transfer property list, `fapl_id`.

This function should only be used with an HDF5 file written as a set of files with the MULTI file driver.

See Also

See Also

`H5P.set_multi_type`

H5P.get_sieve_buf_size

Maximum data sieve buffer size

Syntax

```
sz = H5P.get_sieve_buf_size(fapl_id)
```

Description

`sz = H5P.get_sieve_buf_size(fapl_id)` returns the current maximum size of the data sieve buffer.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
sz = H5P.get_sieve_buf_size(fapl);
H5P.close(fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.set_sieve_buf_size`

H5P.get_small_data_block_size

Small data block size setting

Syntax

```
sz = H5P.get_small_data_block_size(fapl_id)
```

Description

`sz = H5P.get_small_data_block_size(fapl_id)` returns the current setting for the size of the small data block. `fapl_id` is a file access property list identifier.

Examples

```
fid = H5F.open('example.h5');
fapl = H5F.get_access_plist(fid);
sz = H5P.get_small_data_block_size(fapl);
H5P.close(fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.set_small_data_block_size`

H5P.set_alignment

Set alignment properties for file access property list

Syntax

```
H5P.set_alignment(fapl_id,threshold,alignment)
```

Description

`H5P.set_alignment(fapl_id,threshold,alignment)` sets the alignment properties of the file access property list specified by `fapl_id` so that any file object greater than or equal in size to threshold (in bytes) is aligned on an address which is a multiple of alignment.

In most cases the default values of threshold and alignment result in the best performance.

See Also

See Also

`H5P.get_alignment`

H5P.set_family_offset

Set offset property for family of files

Syntax

```
H5P.set_family_offset(fapl_id,offset)
```

Description

`H5P.set_family_offset(fapl_id,offset)` sets offset property in the file access property list specified by `fapl_id` for low-level access to a file in a family of files. `offset` identifies a user-determined location from the beginning of the HDF5 file in bytes.

See Also

See Also

`H5P.get_family_offset`

H5P.set_fapl_core

Modify file access to use H5FD_CORE driver

Syntax

```
H5P.set_fapl_core(fapl_id,increment,backing_store)
```

Description

`H5P.set_fapl_core(fapl_id,increment,backing_store)` modifies the file access property list to use the H5FD_CORE driver. `increment` specifies the increment by which allocated memory is to be increased each time more memory is required. `backing_store` is a Boolean flag that, when non-zero, indicates the file contents should be written to disk when the file is closed.

Examples

Create a file image in memory only.

```
plist = 'H5P_DEFAULT';
ndatasets = 20;
block_size = 1024*1024;
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_fapl_core(fapl,2^16,false);
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',plist,fapl);
space_id = H5S.create_simple(1, block_size, []);
type_id = H5T.copy('H5T_IEEE_F64LE');
data = zeros(block_size,1);
for j = 1:ndatasets
 dsname = sprintf( 'dset%02d', j);
 fprintf( 'Writing dataset %s...\n',dsname);
 dsid = H5D.create(fid,dsname,type_id,space_id,'H5P_DEFAULT');
 H5D.write(dsid,'H5ML_DEFAULT',space_id,space_id,plist,data);
 H5D.close(dsid);
end
H5P.close(fapl);
H5S.close(space_id);
```

```
H5T.close(type_id);
H5F.close(fid);
dir('myfile.h5');
```

See Also

See Also

H5P.get_fapl_core

H5P.set_fapl_family

Set file access to use family driver

Syntax

```
H5P.set_fapl_family(fapl_id,memb_size,memb_fapl_id)
```

Description

`H5P.set_fapl_family(fapl_id,memb_size,memb_fapl_id)` sets the file access property list, specified by `fapl_id`, to use the family driver. `memb_size` is the size in bytes of each file member. `memb_fapl_id` is the identifier of the file access property list to be used for each family member.

Examples

```
plist = 'H5P_DEFAULT';
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_fapl_family(fapl, 8192, plist);
fid = H5F.create('family%d.h5','H5F_ACC_TRUNC','H5P_DEFAULT',fapl);
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [50 25];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,[]);
dset_id = H5D.create(fid,'DS',type_id,space_id,plist)
data = reshape(1:prod(dims),dims);
H5D.write(dset_id,'H5ML_DEFAULT','H5S_ALL','H5S_ALL',plist,data);
H5P.close(fapl);
H5T.close(type_id);
H5S.close(space_id);
H5D.close(dset_id);
dir('*.h5');
h5disp('family%d.h5');
```

See Also

See Also

`H5P.get_fapl_family`

H5P.set_fapl_log

Set use of logging driver

Syntax

```
H5P.set_fapl_log(fapl_id,logfile,flags,buf_size)
```

Description

`H5P.set_fapl_log(fapl_id,logfile,flags,buf_size)` modifies the file access property list, `fapl_id`, to use the logging driver H5FD_LOG. `logfile` is the name of the file in which the logging entries are to be recorded. `flags` is a bit mask that specifies the types of activity to log. See the HDF5 documentation for a list of available flag settings. `buf_size` specifies the size of the logging buffer.

H5P.set_fapl_multi

Set use of multifile driver

Syntax

```
H5P.set_fapl_multi(fapl_id,relax)
H5P.set_fapl_multi(fapl_id,memb_map,memb_fapl,memb_name,memb_addr,relax)
```

Description

`H5P.set_fapl_multi(fapl_id,relax)` sets the file access property list, `fapl_id`, to access HDF5 files created with the multi-driver with default values provided by the HDF5 library. `relax` is a Boolean value that allows read-only access to incomplete file sets when set to `1`.

`H5P.set_fapl_multi(fapl_id,memb_map,memb_fapl,memb_name,memb_addr,relax)` sets the file access property list to use the multifile driver. `memb_map` maps memory usage types to other memory usage types. `memb_fapl` contains a property list for each memory usage type. `memb_name` is a name generator for names of member files. `memb_addr` specifies the offsets within the virtual address space at which each type of data storage begins.

See Also

See Also

`H5P.get_fapl_multi`

H5P.set_fapl_sec2

Set file access for sec2 driver

Syntax

```
H5P.set_fapl_sec2(fapl_id)
```

Description

`H5P.set_fapl_sec2(fapl_id)` modifies the file access property list, `fapl_id`, to use the H5FD_SEC2 driver.

Examples

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_fapl_sec2(fapl);
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

H5P.set_fapl_split

Set file access for emulation of split file driver

Syntax

```
H5P.set_fapl_split(fapl_id,meta_ext,meta_plist_id,raw_ext,raw_plist_id)
```

Description

`H5P.set_fapl_split(fapl_id,meta_ext,meta_plist_id,raw_ext,raw_plist_id)` is a compatibility function that enables the multi-file driver to emulate the split driver from HDF5 Releases 1.0 and 1.2. `meta_ext` is a character vector that specifies the metadata filename extension. `meta_plist_id` is a file access property list identifier for the metadata file. `raw_ext` is a character vector that specifies the raw data filename extension. `raw_plist_id` is the file access property list identifier for the raw data file.

H5P.set_fapl_stdio

Set file access for standard I/O driver

Syntax

```
H5P.set_fapl_stdio(fapl_id)
```

Description

`H5P.set_fapl_stdio(fapl_id)` modifies the file access property list, `fapl_id`, to use the standard I/O driver, H5FD_STDIO.

Examples

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_fapl_stdio(fapl);
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

H5P.set_fclose_degree

Set file access for file close degree

Syntax

```
H5P.set_fclose_degree(fapl_id,degree)
```

Description

`H5P.set_fclose_degree(fapl_id,degree)` sets the file close degree property in the file access property list, `fapl_id`, to the value specified by `degree`. The `degree` argument can have any of the following values:

- `'H5F_CLOSE_WEAK'`
- `'H5F_CLOSE_SEMI'`
- `'H5F_CLOSE_STRONG'`
- `'H5F_CLOSE_DEFAULT'`

Examples

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_fclose_degree(fapl,'H5F_CLOSE_STRONG');
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.get_fclose_degree`

H5P.set_gc_references

Set garbage collection references flag

Syntax

```
H5P.set_gc_references(fapl_id,gc_ref)
```

Description

`H5P.set_gc_references(fapl_id,gc_ref)` sets the flag for garbage collecting references for the file specified by the file access property list identifier, `fapl_id`. The `gc_ref` argument is a flag setting reference garbage collection to on (1) or off (0).

Examples

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_gc_references(fapl,1);
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.get_gc_references`

H5P.set_libver_bounds

Set library version bounds for objects

Syntax

```
H5P.set_libver_bounds(fapl_id,low,high)
```

Description

`H5P.set_libver_bounds(fapl_id,low,high)` sets bounds on library versions, and indirectly format versions, to be used when creating objects in the file with access property list `fapl_id`. The `low` argument must be set to either of `'H5F_LIBVER_EARLIEST'`, `'H5F_LIBVER_18'` or `'H5F_LIBVER_LATEST'`. The `high` argument must be set to `'H5F_LIBVER_18'` or `'H5F_LIBVER_LATEST'`.

Examples

Create an HDF5 file where objects are created using the latest available format for each object.

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_libver_bounds(fapl,'H5F_LIBVER_LATEST','H5F_LIBVER_LATEST');
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
```

See Also

See Also

`H5ML.get_constant_value` | `H5P.get_libver_bounds`

H5P.set_mdc_config

Set initial metadata cache configuration

Syntax

```
H5P.set_mdc_config(plist_id,config_struct)
```

Description

`H5P.set_mdc_config(plist_id,config_struct)` sets the initial metadata cache configuration in the indicated file access property list to the supplied values. Before using this function, you should retrieve the current configuration using `H5P.get_mdc_config`.

Many of the fields in the structure, `config_struct`, are intended to be used only in close consultation with the HDF5 Group itself.

See Also

See Also

`H5P.get_mdc_config`

H5P.set_meta_block_size

Set minimum metadata block size

Syntax

```
H5P.set_meta_block_size(fapl_id,size)
```

Description

`H5P.set_meta_block_size(fapl_id,size)` sets the minimum metadata block size for the file access property list specified by `fapl_id`. The `size` argument specifies minimum size, in bytes, of metadata block allocations.

Examples

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_meta_block_size(fapl,4096);
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.get_meta_block_size`

H5P.set_multi_type

Specify type of data accessed with MULTI driver

Syntax

```
H5P.set_multi_type(fapl_id,type)
```

Description

`H5P.set_multi_type(fapl_id,type)` sets the type of data property in the file access or data transfer property list `fapl_id`. The `type` argument can have any of the following values: `H5FD_MEM_SUPER`, `H5FD_MEM_BTREE`, `H5FD_MEM_DRAW`, `H5FD_MEM_GHEAP`, `H5FD_MEM_LHEAP`, or `H5FD_MEM_OHDR`.

See Also

See Also

`H5P.get_multi_type`

H5P.set_sieve_buf_size

Set maximum size of data sieve buffer

Syntax

```
H5P.set_sieve_buf_size(fapl_id,buffer_size)
```

Description

`H5P.set_sieve_buf_size(fapl_id,buffer_size)` sets `buffer_size`, the maximum size in bytes of the data sieve buffer, which is used by file drivers that are capable of using data sieving. `fapl_id` is a file access property list identifier.

Examples

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_sieve_buf_size(fapl,131072);
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.get_sieve_buf_size`

H5P.set_small_data_block_size

Set size of block reserved for small data

Syntax

```
H5P.set_small_data_block_size(fapl_id,size)
```

Description

`H5P.set_small_data_block_size(fapl_id,size)` sets the maximum size, in bytes, of a contiguous block reserved for small data. `fapl_id` is a file access property list identifier.

Examples

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_small_data_block_size(fapl,4096);
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.get_small_data_block_size`

H5P.get_istore_k

Return 1/2 rank of indexed storage B-tree

Syntax

```
ik = H5P.get_istore_k(plist_id)
```

Description

`ik = H5P.get_istore_k(plist_id)` returns the chunked storage B-tree 1/2 rank of the file creation property list specified by `plist_id`.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
ik = H5P.get_istore_k(fcpl);
H5P.close(fcpl);
H5F.close(fid);
```

See Also

See Also

`H5P.set_istore_k`

H5P.get_sizes

Return size of offsets and lengths

Syntax

```
[sizeof_addr,sizeof_size] = H5P.get_sizes(fcpl)
```

Description

`[sizeof_addr,sizeof_size] = H5P.get_sizes(fcpl)` returns the size of the offsets and lengths used in an HDF5 file. `fcpl` specifies a file creation property list.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
[soaddr, sosize] = H5P.get_sizes(fcpl);
H5P.close(fcpl);
H5F.close(fid);
```

See Also

See Also

`H5P.set_sizes`

H5P.get_sym_k

Return size of B-tree 1/2 rank and leaf node 1/2 size

Syntax

```
[ik,lk] = H5P.get_sym_k(plist_id)
```

Description

`[ik,lk] = H5P.get_sym_k(plist_id)` returns the size of the symbol table B-tree 1/2 rank, `ik`, and the symbol table leaf node 1/2 size, `lk`. The `plist_id` argument is a file creation property list identifier.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
[ik, lk] = H5P.get_sym_k(fcpl);
H5P.close(fcpl);
H5F.close(fid);
```

See Also

See Also

`H5P.set_sym_k`

H5P.get_userblock

Return size of user block

Syntax

```
sz = H5P.get_userblock(plist_id)
```

Description

`sz = H5P.get_userblock(plist_id)` returns the size of a user block in a file creation property list. `plist_id` is a property list identifier.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
sz = H5P.get_userblock(fcpl);
H5P.close(fcpl);
H5F.close(fid);
```

See Also

See Also

`H5P.set_userblock`

H5P.get_version

Return version information for file creation property list

Syntax

```
[superblock,freelist,stab,shhdr] = H5P.get_version(fcpl)
```

Description

`[superblock,freelist,stab,shhdr] = H5P.get_version(fcpl)` returns the version of the super block, the global freelist, the symbol table, and the shared object header. Retrieving this information requires the file creation property list.

Examples

```
fid = H5F.open('example.h5');
fcpl = H5F.get_create_plist(fid);
[super,freelist,stab,shhdr] = H5P.get_version(fcpl);
H5P.close(fcpl);
H5F.close(fid);
```

H5P.set_istore_k

Set size of parameter for indexing chunked datasets

Syntax

```
H5P.set_istore_k(plist_id,ik)
```

Description

`H5P.set_istore_k(plist_id,ik)` sets the size of the parameter used to control the B-trees for indexing chunked datasets for the file creation property list specified by `plist_id`. The `ik` argument is one half the rank of a tree that stores chunked raw data.

Examples

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_istore_k(fcpl,64);
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.get_istore_k`

H5P.set_sizes

Set byte size of offsets and lengths

Syntax

```
H5P.set_sizes(plist_id,sizeof_addr,sizeof_size)
```

Description

`H5P.set_sizes(plist_id,sizeof_addr,sizeof_size)` sets the byte size of the offsets and lengths used to address objects in an HDF5 file. `plist_id` is a file creation property list.

See Also

See Also

`H5P.get_sizes`

H5P.set_sym_k

Set size of parameters used to control symbol table nodes

Syntax

```
H5P.set_sym_k(plist_id,ik,lk)
```

Description

`H5P.set_sym_k(plist_id,ik,lk)` sets the size of parameters used to control the symbol table nodes for the file access property list, `plist_id`. The `ik` argument is one half the rank of a tree that stores a symbol table for a group. `lk` is one half of the number of symbols that can be stored in a symbol table node.

Examples

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_sym_k(fcpl,32,8);
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.get_sym_k`

H5P.set_userblock

Set user block size

Syntax

```
H5P.set_userblock(plist_id,size)
```

Description

`H5P.set_userblock(plist_id,size)` sets the user block size of the file creation property list, `plist_id`.

Examples

```
fcpl = H5P.create('H5P_FILE_CREATE');
fapl = H5P.create('H5P_FILE_ACCESS');
H5P.set_userblock(fcpl,4096);
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',fcpl,fapl);
H5F.close(fid);
```

See Also

See Also

`H5P.get_userblock`

H5P.get_attr_creation_order

Return tracking order and indexing settings

Syntax

```
crt_order_flags = H5P.get_attr_creation_order(ocpl_id)
```

Description

`crt_order_flags = H5P.get_attr_creation_order(ocpl_id)` retrieves tracking and indexing settings for attribute creation order. If `crt_order_flags` is zero, then the attribute creation order is neither tracked or indexed. Otherwise the creation order flags should be one of the following constant values:

```
H5P_CRT_ORDER_TRACKED
H5P_CRT_ORDER_INDEXED
```

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
dcpl = H5D.get_create_plist(dset_id);
flags = H5P.get_attr_creation_order(dcpl);
switch ( flags )
    case 0
        fprintf('neither tracked nor indexed\n');
    case H5ML.get_constant_value('H5P_CRT_ORDER_TRACKED')
        fprintf('tracked\n');
    case H5ML.get_constant_value('H5P_CRT_ORDER_INDEXED')
        fprintf('indexed\n');
end
H5P.close(dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5ML.get_constant_value` | `H5P.set_attr_creation_order`

H5P.get_attr_phase_change

Retrieve attribute phase change thresholds

Syntax

```
[max_compact,min_dense] = H5P.get_attr_phase_change(ocpl_id)
```

Description

`[max_compact,min_dense] = H5P.get_attr_phase_change(ocpl_id)` retrieves attribute phase change thresholds for the dataset or group with creation property list `ocpl_id`.

`max_compact` is the maximum number of attributes to be stored in compact storage (default is 8).

`min_dense` is the minimum number of attributes to be stored in dense storage (default is 6).

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
dcpl = H5D.get_create_plist(dset_id);
[max_compact,min_dense] = H5P.get_attr_phase_change(dcpl);
H5P.close(dcpl);
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5P.set_attr_phase_change`

H5P.get_copy_object

Return properties to be used when object is copied

Syntax

```
copy_options = H5P.get_copy_object(ocpl_id)
```

Description

`copy_options = H5P.get_copy_object(ocpl_id)` retrieves the properties currently specified in the object copy property list `ocpl_id`, which will be invoked when a new copy is made of an existing object.

Examples

```
ocpl = H5P.create('H5P_OBJECT_COPY');
options = H5P.get_copy_object(ocpl);
```

See Also

See Also

`H5P.set_copy_object`

H5P.set_attr_creation_order

Set tracking of attribute creation order

Syntax

```
H5P.set_attr_creation_order(gcplId,crt_order_flags)
```

Description

`H5P.set_attr_creation_order(gcplId,crt_order_flags)` sets tracking and indexing of attribute creation order. The creation order flags should be either `H5P_CRT_ORDER_TRACKED` or a bitwise-or of `H5P_CRT_ORDER_TRACKED` and `H5P_CRT_ORDER_INDEXED`.

The default behavior is that attribute creation order is neither tracked nor indexed.

Examples

```
dcpl = H5P.create('H5P_DATASET_CREATE');
order = H5ML.get_constant_value('H5P_CRT_ORDER_TRACKED');
H5P.set_attr_creation_order(dcpl,order);
```

See Also

See Also

`bitor` | `H5ML.get_constant_value` | `H5P.get_attr_creation_order`

H5P.set_attr_phase_change

Set attribute storage phase change thresholds

Syntax

```
H5P.set_attr_phase_change(ocpl_id,max_compact,min_dense)
```

Description

`H5P.set_attr_phase_change(ocpl_id,max_compact,min_dense)` sets attribute storage phase change thresholds for the group or dataset with creation order property list `ocpl_id`.

`max_compact` is the maximum number of attributes to be stored in compact storage (default is 8).

`min_dense` is the minimum number of attributes to be stored in dense storage (default is 6).

See Also

See Also

`H5P.get_attr_phase_change`

H5P.set_copy_object

Set properties to be used when objects are copied

Syntax

```
H5P.set_copy_object(ocp_plist_id,copy_options)
```

Description

`H5P.set_copy_object(ocp_plist_id,copy_options)` sets the properties in the object copy property list `ocp_plist_id` that will be invoked when a new copy is made of an existing object. `ocp_plist_id` is the object copy property list and specifies the properties governing the copying of the object.

Several flags, described below, are available for inclusion in the object copy property list:

`H5O_COPY_SHALLOW_HIERARCHY_FLAG`	Copy only immediate members of a group. Default behavior, without flag: Recursively copy all objects below the group.
`H5O_COPY_EXPAND_SOFT_LINK_FLAG`	Expand soft links into new objects. Default behavior, without flag: Keep soft links as they are.
`H5O_COPY_EXPAND_EXT_LINK_FLAG`	Expand external link into new objects. Default behavior, without flag: Keep external links as they are.
`H5O_COPY_EXPAND_REFERENCE_FLAG`	Copy objects that are pointed to by references. Default behavior, without flag: Update only the values of object references.
`H5O_COPY_WITHOUT_ATTR_FLAG`	Copy object without copying attributes. Default behavior, without flag: Copy object along with all its attributes.

Examples

```
ocp_plist_id = H5P.create ('H5P_OBJECT_COPY');
```

```
option1 = H5ML.get_constant_value('H5O_COPY_EXPAND_SOFT_LINK_FLAG');
option2 = H5ML.get_constant_value('H5O_COPY_EXPAND_REFERENCE_FLAG');
copy_options = bitor(option1,option2);
H5P.set_copy_object(ocp_plist_id, copy_options);
```

H5P.get_create_intermediate_group

Determine creation of intermediate groups

Syntax

```
bool = H5P.get_create_intermediate_group(lcpl_id)
```

Description

`bool = H5P.get_create_intermediate_group(lcpl_id)` determines whether the link creation property list `lcpl_id` is set to enable creating missing intermediate groups.

Examples

```
lcpl = H5P.create('H5P_LINK_CREATE');
if H5P.get_create_intermediate_group(lcpl)
    fprintf('set to enable creating intermediate groups\n');
else
    fprintf('not set to enable creating intermediate groups\n');
end
```

See Also

See Also

`H5P.set_create_intermediate_group`

H5P.get_link_creation_order

Query if link creation order is tracked

Syntax

```
crt_order_flags = H5P.get_link_creation_order(gcpl_id)
```

Description

`crt_order_flags = H5P.get_link_creation_order(gcpl_id)` queries whether link creation order is tracked or indexed in a group with creation property list identifier `gcpl_id`. The creation order flags should be one of the following constant values:

```
H5P_CRT_ORDER_TRACKED
H5P_CRT_ORDER_INDEXED
```

Examples

```
tracked = H5ML.get_constant_value('H5P_CRT_ORDER_TRACKED');
indexed = H5ML.get_constant_value('H5P_CRT_ORDER_INDEXED');
gcpl = H5P.create('H5P_GROUP_CREATE');
order = H5P.get_link_creation_order(gcpl);
if bitand(order,tracked)
    fprintf('order is tracked\n');
end
if bitand(order,indexed)
    fprintf('order is indexed\n');
end
```

See Also

See Also

bitand | H5ML.get_constant_value | H5P.set_link_creation_order

H5P.get_link_phase_change

Query settings for conversion between groups

Syntax

```
[max_compact,min_dense] = H5P.get_link_phase_change(gcpl_id)
```

Description

`[max_compact,min_dense] = H5P.get_link_phase_change(gcpl_id)` retrieves the settings for conversion between compact and dense groups.

`max_compact` is the maximum number of links to store as header messages in the group header before converting the group to the dense format. Groups that are in the compact format and exceed this number of links are automatically converted to the dense format.

`min_dense` is the minimum number of links to store in the dense format. Groups which are in dense format and in which the number of links falls below this number are automatically converted back to the compact format.

Examples

```
gcpl = H5P.create('H5P_GROUP_CREATE');
[max_compact, min_dense] = H5P.get_link_phase_change(gcpl);
```

See Also

See Also

`H5P.set_link_phase_change`

H5P.set_create_intermediate_group

Set creation of intermediate groups

Syntax

```
H5P.set_create_intermediate_group(lcpl_id,flag)
```

Description

`H5P.set_create_intermediate_group(lcpl_id,flag)` specifies in the link creation property list `lcpl_id` whether to create missing intermediate groups.

Examples

Enable the creation of intermediate groups.

```
fid = H5F.create('myfile.h5');
lcpl = H5P.create('H5P_LINK_CREATE');
H5P.set_create_intermediate_group(lcpl,1);
gid = H5G.create(fid,'/a/b/c/d',lcpl,'H5P_DEFAULT','H5P_DEFAULT');
H5G.close(gid);
H5F.close(fid);
```

See Also

See Also

`H5P.get_create_intermediate_group`

H5P.set_link_creation_order

Set creation order tracking and indexing

Syntax

```
H5P.set_link_creation_order(gcplId,crt_order_flags)
```

Description

`H5P.set_link_creation_order(gcplId,crt_order_flags)` sets creation order tracking and indexing for links in the group with group creation property list `gcpl_id`.

The creation order flags should be one of the following constant values:

```
H5P_CRT_ORDER_TRACKED
H5P_CRT_ORDER_INDEXED
```

If only `H5P_CRT_ORDER_TRACKED` is set, HDF5 will track link creation order in any group created with the group creation property list `gcpl_id`. If both `H5P_CRT_ORDER_TRACKED` and `H5P_CRT_ORDER_INDEXED` are set, HDF5 will track link creation order in the group and index links on that property.

Examples

```
tracked = H5ML.get_constant_value('H5P_CRT_ORDER_TRACKED');
indexed = H5ML.get_constant_value('H5P_CRT_ORDER_INDEXED');
order = bitor(tracked,indexed);
gcpl = H5P.create('H5P_GROUP_CREATE');
H5P.set_link_creation_order(gcpl,order);
```

See Also

See Also

`H5ML.get_constant_value` | `H5P.get_link_creation_order`

H5P.set_link_phase_change

Set parameters for group conversion

Syntax

```
H5P.set_link_phase_change(gcpl_id,max_compact,min_dense)
```

Description

`H5P.set_link_phase_change(gcpl_id,max_compact,min_dense)` sets the parameters for conversion between compact and dense groups.

`max_compact` is the maximum number of links to store as header messages in the group header before converting the group to the dense format. Groups that are in the compact format and exceed this number of links are automatically converted to the dense format.

`min_dense` is the minimum number of links to store in the dense format. Groups which are in dense format and in which the number of links falls below this number are automatically converted back to the compact format.

Examples

```
gcpl = H5P.create('H5P_GROUP_CREATE');
H5P.set_link_phase_change(gcpl,10,8);
```

See Also

See Also

`H5P.get_link_phase_change`

H5P.get_char_encoding

Return character encoding

Syntax

```
encoding = H5P.get_char_encoding(propertyList)
```

Description

`encoding = H5P.get_char_encoding(propertyList)` retrieves the character encoding used to encode strings or object names that are created with the property list `propertyList`. The values returned correspond to either `'H5T_CSET_ASCII'` or `'H5T_CSET_UTF8'`.

See Also

See Also

`H5ML.get_constant_value` | `H5P.set_char_encoding`

H5P.set_char_encoding

Set character encoding used to encode strings

Syntax

```
H5P.set_char_encoding(propList,encoding)
```

Description

`H5P.set_char_encoding(propList,encoding)` sets the character encoding used to encode strings or object names that are created with the property list `propList`. The values of `encoding` should either be `'H5T_CSET_ASCII'` or `'H5T_CSET_UTF8'`.

See Also

See Also

`H5ML.get_constant_value` | `H5P.get_char_encoding`

H5R.create

Create reference

Syntax

```
ref = H5R.create(loc_id,name,ref_type,space_id)
```

Description

`ref = H5R.create(loc_id,name,ref_type,space_id)` creates the reference, `ref`, of the type specified in `ref_type`, pointing to the object specified by name located at `loc_id`. The `ref_type` argument can be either `'H5R_OBJECT'`, or `'H5R_DATASET_REGION'`. The `space_id` argument should be `-1`, if `ref_type` is `'H5R_OBJECT'`.

Examples

Create a double-precision dataset and a reference dataset.

```
fid = H5F.create('myfile.h5');
type1_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [10 5];
h5_dims = fliplr(dims);
h5_maxdims = h5_dims;
space1_id = H5S.create_simple(2,h5_dims,h5_maxdims);
dcpl = 'H5P_DEFAULT';
dset1_id = H5D.create(fid,'my_double',type1_id,space1_id,dcpl);
type2_id = 'H5T_STD_REF_OBJ';
space2_id = H5S.create('H5S_SCALAR');
dset2_id = H5D.create(fid,'my_ref',type2_id,space2_id,dcpl);
ref_data = H5R.create(fid,'my_double','H5R_OBJECT',-1);
dxpl = 'H5P_DEFAULT';
H5D.write(dset2_id,'H5ML_DEFAULT','H5S_ALL','H5S_ALL',dxpl,ref_data);
H5D.close(dset1_id);
H5D.close(dset2_id);
H5F.close(fid);
```

See Also

See Also

`H5D.create`

H5R.dereference

Open object specified by reference

Syntax

```
output = H5R.dereference(dataset,ref_type,ref)
```

Description

`output = H5R.dereference(dataset,ref_type,ref)` returns an identifier to the object specified by `ref` in the dataset specified by `dataset`.

Examples

```
plist = 'H5P_DEFAULT';
space = 'H5S_ALL';
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/reference');
ref_data = H5D.read(dset_id,'H5T_STD_REF_OBJ',space,space,plist);
deref_dset_id = H5R.dereference(dset_id,'H5R_OBJECT',ref_data(:,1));
H5D.close(dset_id);
H5D.close(deref_dset_id);
H5F.close(fid);
```

See Also

See Also

`H5I.get_name` | `H5R.create`

H5R.get_name

Name of referenced object

Syntax

```
name = H5R.get_name(loc_id,ref_type,ref)
```

Description

`name = H5R.get_name(loc_id,ref_type,ref)` retrieves the name for the object identified by `ref`. The `loc_id` argument is the identifier for the dataset containing the reference or for the group containing that dataset. `ref_type` specifies the type of the reference `ref`. Valid values for `ref_type` are `'H5R_OBJECT'` or `'H5R_DATASET_REGION'`.

Examples

```
plist = 'H5P_DEFAULT';
space = 'H5S_ALL';
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/reference');
ref_data = H5D.read(dset_id,'H5T_STD_REF_OBJ',space,space,plist);
name = H5R.get_name(dset_id,'H5R_OBJECT',ref_data(:,1));
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

`H5I.get_name`

H5R.get_obj_type

Type of referenced object

Syntax

```
obj_type = H5R.get_obj_type(id,ref_type,ref)
```

Description

`obj_type = H5R.get_obj_type(id,ref_type,ref)` returns the type of object that an object reference points to. Valid values for `ref_type` are: `H5R_OBJECT` or `H5R_DATASET_REGION`. Valid return values correspond to the following values.

`'H5O_TYPE_GROUP'`	Object is a group.
`'H5O_TYPE_DATASET'`	Object is a dataset.
`'H5O_TYPE_NAMED_DATATYPE'`	Object is a named datatype.

This function corresponds to the 1.8 interface version of `H5Rget_obj_type` in the HDF5 library C API.

Examples

```
plist = 'H5P_DEFAULT';
space = 'H5S_ALL';
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/reference');
ref_data = H5D.read(dset_id,'H5T_STD_REF_OBJ',space,space,plist);
obj_type = H5R.get_obj_type(fid,'H5R_OBJECT',ref_data(:,1));
switch(obj_type)
    case H5ML.get_constant_value('H5O_TYPE_GROUP')
        fprintf('group\n');
    case H5ML.get_constant_value('H5O_TYPE_DATASET')
        fprintf('dataset\n');
    case H5ML.get_constant_value('H5O_TYPE_NAMED_DATATYPE')
        fprintf('named datatype\n');
```

```
end
H5D.close(dset_id);
H5F.close(fid);
```

See Also

See Also

H5ML.get_constant_value

H5R.get_region

Copy of data space of specified region

Syntax

```
space_id = H5R.get_region(dataset,ref_type,ref)
```

Description

`space_id = H5R.get_region(dataset,ref_type,ref)` returns a data space with the specified region selected. `dataset` is used to identify the file containing the referenced region and can be any identifier for any object in the file.

Examples

```
space = 'H5S_ALL';
plist = 'H5P_DEFAULT';
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/region_reference');
ref_data = H5D.read(dset_id,'H5T_STD_REF_DSETREG',space,space,plist);
space_id = H5R.get_region(fid,'H5R_DATASET_REGION',ref_data(:,1));
H5S.close(space_id);
H5D.close(dset_id);
H5F.close(fid);
```

H5S.copy

Create copy of data space

Syntax

```
output = H5S.copy(space_id)
```

Description

`output = H5S.copy(space_id)` creates a new data space, which is an exact copy of the dataspace identified by `space_id`. The `output` argument is a data space identifier.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g2/dset2.1');
space1_id = H5D.get_space(dset_id);
space2_id = H5S.copy(space1_id);
[~,dims1] = H5S.get_simple_extent_dims(space1_id)
[~,dims2] = H5S.get_simple_extent_dims(space2_id)
```

See Also

See Also

`H5D.get_space` | `H5S.get_simple_extent_dims`

H5S.create

Create new data space

Syntax

```
space_id = H5S.create(space_type)
```

Description

`space_id = H5S.create(space_type)` creates a new dataspace of the type specified by `space_type`, which can be specified by one of the following character vectors.

`'H5S_SCALAR'`

`'H5S_SIMPLE'`

`'H5S_NULL'`

`space_id` is the identifier for the new dataspace.

Examples

Create a scalar dataspace.

```
space_id = H5S.create('H5S_SCALAR');
numpoints = H5S.get_simple_extent_npoints(space_id);
```

See Also

See Also

`H5S.get_simple_extent_npoints`

H5S.close

Close data space

Syntax

```
H5S.close(space_id)
```

Description

`H5S.close(space_id)` releases and terminates access to a data space. `space_id` is a data space identifier.

See Also

See Also

`H5A.get_space` | `H5D.get_space`

H5S.create_simple

Create new simple data space

Syntax

```
space_id = H5S.create_simple(rank,h5_dims,h5_maxdims)
```

Description

`space_id = H5S.create_simple(rank,h5_dims,h5_maxdims)` creates a new simple data space and opens it for access. `rank` is the number of dimensions used in the data space. `h5_dims` is an array specifying the size of each dimension of the dataset. `h5_maxdims` is an array specifying the upper limit on the size of each dimension. `space_id` is a data space identifier.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_dims` and `h5_maxdims` parameters assume C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

Create a data space for a dataset with 10 rows and 5 columns.

```
dims = [10 5];
h5_dims = fliplr(dims);
h5_maxdims = h5_dims;
space_id = H5S.create_simple(2,h5_dims,h5_maxdims);
```

Create a data space for a dataset with 10 rows and 5 columns such that the dataset is extendible along the column dimension.

```
dims = [10 5];
h5_dims = fliplr(dims);
maxdims = [10 H5ML.get_constant_value('H5S_UNLIMITED')];
```

```
h5_maxdims = fliplr(maxdims);
space_id = H5S.create_simple(2,h5_dims,h5_maxdims);
```

See Also

See Also

H5ML.get_constant_value | H5S.close | H5S.create

H5S.extent_copy

Copy extent from source to destination data space

Syntax

```
H5S.extent_copy(dst_id,src_id)
```

Description

`H5S.extent_copy(dst_id,src_id)` copies the extent from the source data space, `src_id`, to the destination data space, `dst_id`.

Examples

```
space_id1 = H5S.create('H5S_SIMPLE');
dims = [100 200];
h5_dims = fliplr(dims);
maxdims = [100 H5ML.get_constant_value('H5S_UNLIMITED')];
h5_maxdims = fliplr(maxdims);
H5S.set_extent_simple(space_id1,2,h5_dims,h5_maxdims);
space_id2 = H5S.create('H5S_SIMPLE');
H5S.extent_copy(space_id2,space_id1);
```

See Also

See Also

`H5S.create` | `H5S.get_simple_extent_dims` | `H5S.set_extent_simple`

H5S.get_select_bounds

Bounding box of data space selection

Syntax

```
[start,finish] = H5S.get_select_bounds(space_id)
```

Description

`[start,finish] = H5S.get_select_bounds(space_id)` returns the coordinates of the bounding box containing the current selection. `start` contains the starting coordinates of the bounding box and `finish` contains the coordinates of the diagonally opposite corner.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_start`, `h5_stride`, `h5_count` and `h5_block` parameters assume C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

```
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
start = fliplr([10 20]); block = fliplr([20 30]);
H5S.select_hyperslab(space_id,'H5S_SELECT_SET',start,[],[],block);
start = fliplr([30 40]); block = fliplr([20 30]);
H5S.select_hyperslab(space_id,'H5S_SELECT_OR',start,[],[],block);
[start, finish] = H5S.get_select_bounds(space_id);
matlab_start = fliplr(start);
matlab_finish = fliplr(finish);
```

See Also

See Also

`H5S.create_simple` | `H5S.select_hyperslab`

H5S.get_select_elem_npoints

Number of element points in selection

Syntax

```
numpoints = H5S.get_select_elem_npoints(space_id)
```

Description

`numpoints = H5S.get_select_elem_npoints(space_id)` returns the number of element points in the current data space selection.

Examples

Select the corner points of a data space.

```
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
coords = [0 0; 0 199; 99 0; 99 199];
coords = fliplr(coords);
coords = coords';
H5S.select_elements(space_id,'H5S_SELECT_SET',coords)
numpoints = H5S.get_select_elem_npoints(space_id);
```

See Also

See Also

`H5S.select_elements`

H5S.get_select_elem_pointlist

Element points in data space selection

Syntax

```
points =
H5S.get_select_elem_pointlist(space_id,startpoint,numpoints)
```

Description

`points = H5S.get_select_elem_pointlist(space_id,startpoint,numpoints)` returns the list of element points in the current data space selection. `startpoint` specifies the element point to start with and `numpoints` specifies the total number of points.

`points` is a two-dimensional array of 0-based values specifying the coordinates of the elements. If `m` is the rank of the dataspace, then `points` will have size [`m` x `numpoints`].

Note: The ordering of the coordinate points is the same as the HDF5 library C API.

Examples

Determine the first two points in the current selection.

```
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
coords = [0 0; 0 199; 99 0; 99 199];
coords = fliplr(coords);
coords = coords';
H5S.select_elements(space_id,'H5S_SELECT_SET',coords);
points = H5S.get_select_elem_pointlist(space_id,0,2);
```

H5S.get_select_hyper_blocklist

List of hyperslab blocks

Syntax

```
blocklist =
H5S.get_select_hyper_blocklist(space_id,startblock,numblocks)
```

Description

`blocklist = H5S.get_select_hyper_blocklist(space_id,startblock,numblocks)` returns a list of the hyperslab blocks currently selected. `space_id` is a dataspace identifier. `startblock` specifies the block to start with and `numblocks` specifies the number of hyperslab blocks to retrieve.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_start`, `h5_stride`, `h5_count` and `h5_block` parameters assume C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

```
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
start = fliplr([10 20]); block = fliplr([20 25]);
H5S.select_hyperslab(space_id,'H5S_SELECT_SET',start,[],[],block);
start = fliplr([20 30]); block = fliplr([20 25]);
H5S.select_hyperslab(space_id,'H5S_SELECT_NOTB',start,[],[],block);
nblocks = H5S.get_select_hyper_nblocks(space_id);
for j = 1:nblocks
    hblocks{j} = H5S.get_select_hyper_blocklist(space_id,j-1,1);
end
```

See Also

See Also

`H5S.get_select_hyper_nblocks` | `H5S.select_hyperslab`

H5S.get_select_hyper_nblocks

Number of hyperslab blocks

Syntax

```
num_blocks = H5S.get_select_hyper_nblocks(space_id)
```

Description

`num_blocks = H5S.get_select_hyper_nblocks(space_id)` returns the number of hyperslab blocks in the current data space selection.

Examples

```
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
start = fliplr([10 20]); block = fliplr([20 25]);
H5S.select_hyperslab(space_id,'H5S_SELECT_SET',start,[],[],block);
start = fliplr([20 30]); block = fliplr([20 25]);
H5S.select_hyperslab(space_id,'H5S_SELECT_NOTB',start,[],[],block);
nblocks = H5S.get_select_hyper_nblocks(space_id);
```

See Also

See Also

`H5S.get_select_hyper_blocklist` | `H5S.select_hyperslab`

H5S.get_select_npoints

Number of elements in data space selection

Syntax

```
num_points = H5S.get_select_npoints(space_id)
```

Description

`num_points = H5S.get_select_npoints(space_id)` returns the number of elements in the current data space selection.

Examples

```
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
op = 'H5S_SELECT_SET';
start = fliplr([10 20]); block = fliplr([20 30]);
H5S.select_hyperslab(space_id,'H5S_SELECT_SET',start,[],[],block);
n = H5S.get_select_npoints(space_id);
```

See Also

See Also

`H5S.create_simple` | `H5S.select_hyperslab`

H5S.get_select_type

Type of data space selection

Syntax

```
sel_type = H5S.get_select_type(space_id)
```

Description

`sel_type = H5S.get_select_type(space_id)` returns the data space selection type. Valid return values correspond to the following enumerated constants:

```
H5S_SEL_NONE
H5S_SEL_POINTS
H5S_SEL_HYPERSLABS
H5S_SEL_ALL
```

Examples

```
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
start = fliplr([10 20]); block = fliplr([20 30]);
H5S.select_hyperslab(space_id,'H5S_SELECT_SET',start,[],[],block);
sel_type = H5S.get_select_type(space_id);
switch(sel_type)
    case H5ML.get_constant_value('H5S_SEL_NONE')
        fprintf('no selection\n');
    case H5ML.get_constant_value('H5S_SEL_POINTS');
        fprintf('point selection\n');
    case H5ML.get_constant_value('H5S_SEL_HYPERSLABS');
        fprintf('hyperslab selection\n');
end
```

See Also

See Also

`H5ML.get_constant_value` | `H5S.select_elements` | `H5S.select_hyperslab`

H5S.get_simple_extent_dims

Data space size and maximum size

Syntax

```
[numdims,h5_dims,h5_maxdims] = H5S.get_simple_extent_dims(space_id)
```

Description

`[numdims,h5_dims,h5_maxdims] = H5S.get_simple_extent_dims(space_id)` returns the number of dimensions in the data space, the size of each dimension, and the maximum size of each dimension.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_dims` and `h5_maxdims` assume C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g2/dset2.2');
space_id = H5D.get_space(dset_id);
[ndims,h5_dims] = H5S.get_simple_extent_dims(space_id);
matlab_dims = fliplr(h5_dims);
```

H5S.get_simple_extent_ndims

Data space rank

Syntax

```
output = H5S.get_simple_extent_ndims(space_id)
```

Description

`output = H5S.get_simple_extent_ndims(space_id)` returns the dimensionality (also called the rank) of a data space.

H5S.get_simple_extent_npoints

Number of elements in data space

Syntax

```
output = H5S.get_simple_extent_npoints(space_id)
```

Description

`output = H5S.get_simple_extent_npoints(space_id)` returns the number of elements in the data space specified by `space_id`.

H5S.get_simple_extent_type

Data space class

Syntax

```
space_type = H5S.get_simple_extent_type(space_id)
```

Description

`space_type = H5S.get_simple_extent_type(space_id)` returns the data space class of the data space specified by `space_id`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
space_id = H5D.get_space(dset_id);
space_type = H5S.get_simple_extent_type(space_id);
switch(space_type)
    case H5ML.get_constant_value('H5S_SCALAR')
        fprintf('scalar\n');
    case H5ML.get_constant_value('H5S_SIMPLE')
        fprintf('simple\n');
    case H5ML.get_constant_value('H5S_NULL')
        fprintf('none\n');
end
```

See Also

See Also

`H5D.get_space` | `H5ML.get_constant_value` | `H5S.create`

H5S.is_simple

Determine if data space is simple

Syntax

```
output = H5S.is_simple(space_id)
```

Description

`output = H5S.is_simple(space_id)` returns a positive value if the data space specified by `space_id` is a simple data space, zero if it is not, and a negative value to indicate failure.

Examples

Create a new data space and verify that it is simple.

```
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
val = H5S.is_simple(space_id);
```

Create a null data space and verify that it is not simple.

```
space_id = H5S.create('H5S_NULL');
val = H5S.is_simple(space_id);
```

See Also

See Also

`H5S.create` | `H5S.create_simple`

H5S.offset_simple

Set offset of simple data space

Syntax

```
H5S.offset_simple(space_id,offset)
```

Description

`H5S.offset_simple(space_id,offset)` specifies the offset of the simple data space specified by `space_id`. This function allows the same shaped selection to be moved to different locations within a data space without requiring it to be redefined.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_start`, `h5_stride`, `h5_count` and `h5_block` parameters assume C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

```
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
start = fliplr([10 20]); block = fliplr([20 30]);
H5S.select_hyperslab(space_id,'H5S_SELECT_SET',start,[],[],block);
offset = fliplr([3 5]);
H5S.offset_simple(space_id,offset)
[start,finish] = H5S.get_select_bounds(space_id);
start = fliplr(start);
finish = fliplr(finish);
```

See Also

See Also

`H5S.get_select_bounds` | `H5S.select_hyperslab`

H5S.select_all

Select entire extent of data space

Syntax

```
H5S.select_all(space_id)
```

Description

`H5S.select_all(space_id)` selects the entire extent of the data space specified by `space_id`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
space_id = H5D.get_space(dset_id);
num_points1 = H5S.get_select_npoints(space_id);
H5S.select_none(space_id);
num_points2 = H5S.get_select_npoints(space_id);
H5S.select_all(space_id);
num_points3 = H5S.get_select_npoints(space_id);
```

H5S.select_elements

Specify coordinates to include in selection

Syntax

```
H5S.select_elements(space_id,op,h5_coord)
```

Description

`H5S.select_elements(space_id,op,h5_coord)` selects the array elements to be included in the selection for the data space specified by `space_id`. The `op` argument determines how the new selection is to be combined with the previously existing selection for the data space and can be specified as one of the following:

```
'H5S_SELECT_SET'
'H5S_SELECT_APPEND'
'H5S_SELECT_PREPEND'
```

`h5_coord` is a two-dimensional array of 0-based values specifying the coordinates of the elements being selected. If `m` is the rank of the data space and if n is the number of points, then `h5_coord` should be an `m`-by-`n` array.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_coord` parameter assumes coordinates have C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

Select the corner points of a data space. In this case, `h5_coord` should have size 2x4.

```
dims = [100 200];
h5_dims = fliplr(dims);
```

```
space_id = H5S.create_simple(2,h5_dims,h5_dims);
coords = [0 0; 0 199; 99 0; 99 199];
h5_coords = fliplr(coords);
h5_coords = h5_coords';
H5S.select_elements(space_id,'H5S_SELECT_SET',h5_coords);
```

See Also

See Also

H5S.create_simple | H5S.get_select_elem_npoints | H5S.get_select_elem_pointlist

H5S.select_hyperslab

Select hyperslab region

Syntax

```
H5S.select_hyperslab(space_id,op,h5_start,h5_stride,h5_count,h5_block)
```

Description

`H5S.select_hyperslab(space_id,op,h5_start,h5_stride,h5_count,h5_block)` selects a hyperslab region to add to the current selected region for the data space specified by `space_id`. The `op` argument determines how the new selection is to be combined with the previously existing selection for the data space. Possible values include: `H5S_SELECT_SET`, `H5S_SELECT_OR`, `H5S_SELECT_AND`, `H5S_SELECT_XOR`, `H5S_SELECT_NOTA`, or `H5S_SELECT_NOTB`.

The `h5_start` array determines the starting coordinates of the hyperslab to select. The `h5_count` array determines how many blocks to select from the data space, in each dimension. The `h5_stride` array specifies how many elements to move in each dimension. The `h5_block` array determines the size of the element block selected from the data space.

If `h5_stride` is specified as `[]`, then a contiguous hyperslab is selected, as if each value in `h5_stride` were set to 1. If `h5_count` is specified as `[]`, the number of blocks selected along each dimension defaults to 1. If `h5_block` is specified as `[]`, then the block size defaults to a single element in each dimension, as if each value in the block array were set to 1.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_start`, `h5_stride`, `h5_count` and `h5_block` parameters assume C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

```
dims = [100 200];
```

```
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
start = fliplr([10 20]); block = fliplr([20 30]);
H5S.select_hyperslab(space_id,'H5S_SELECT_SET',start,[],[],block);
```

See Also

See Also

H5S.create_simple

H5S.select_none

Reset selection region to include no elements

Syntax

```
H5S.select_none(space_id)
```

Description

`H5S.select_none(space_id)` resets the selection region for the data space `space_id` to include no elements.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
space_id = H5D.get_space(dset_id);
num_points1 = H5S.get_select_npoints(space_id);
H5S.select_none(space_id);
num_points2 = H5S.get_select_npoints(space_id);
```

H5S.select_valid

Determine validity of selection

Syntax

```
output = H5S.select_valid(space_id)
```

Description

`output = H5S.select_valid(space_id)` returns a positive value if the selection of the data space `space_id` is within the extent of that data space, and zero if it is not. A negative value indicates failure.

Examples

```
dims = [100 200];
h5_dims = fliplr(dims);
space_id = H5S.create_simple(2,h5_dims,h5_dims);
start = fliplr([90 190]); count = [11 11];
H5S.select_hyperslab(space_id,'H5S_SELECT_SET',start,[],count,[]);
valid = H5S.select_valid(space_id);
```

See Also

See Also

`H5S.create_simple` | `H5S.select_hyperslab`

H5S.set_extent_none

Remove extent from data space

Syntax

```
H5S.set_extent_none(space_id)
```

Description

`H5S.set_extent_none(space_id)` removes the extent from a data space and sets the type to `H5S_NO_CLASS`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer2D');
space_id = H5D.get_space(dset_id);
H5S.set_extent_none(space_id);
extent_type = H5S.get_simple_extent_type(space_id);
switch(extent_type)
    case H5ML.get_constant_value('H5S_SCALAR')
        fprintf('scalar\n');
    case H5ML.get_constant_value('H5S_SIMPLE')
        fprintf('simple\n');
    case H5ML.get_constant_value('H5S_NO_CLASS')
        fprintf('no class\n');
end
```

See Also

See Also

`H5S.get_simple_extent_dims`

H5S.set_extent_simple

Set size of data space

Syntax

```
H5S.set_extent_simple(space_id,rank,h5_dims,h5_maxdims)
```

Description

`H5S.set_extent_simple(space_id,rank,h5_dims,h5_maxdims)` sets the size of the data space identified by `space_id`. The `rank` argument is the number of dimensions used in the data space. `h5_dims` is an array specifying the size of each dimension of the dataset. `h5_maxdims` is an array specifying the upper limit on the size of each dimension.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_dims` and `h5_maxdims` parameters assume C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

```
space_id = H5S.create('H5S_SIMPLE');
dims = [100 200];
h5_dims = fliplr(dims);
maxdims = [100 H5ML.get_constant_value('H5S_UNLIMITED')];
h5_maxdims = fliplr(maxdims);
H5S.set_extent_simple(space_id,2,h5_dims, h5_maxdims);
```

See Also

See Also

`H5ML.get_constant_value` | `H5S.create` | `H5S.get_simple_extent_dims`

H5T.close

Close data type

Syntax

```
H5T.close(type_id)
```

Description

`H5T.close(type_id)` releases the data type specified by `type_id`.

See Also

See Also

`H5A.get_type` | `H5D.get_type`

H5T.commit

Commit transient data type

Syntax

```
H5T.commit(loc_id,name,type_id)
H5T.commit(loc_id,name,type_id,lcpl_id,tcpl_id,tapl_id)
```

Description

`H5T.commit(loc_id,name,type_id)` commits a transient data type to a file, creating a new named data type. `loc_id` is a file or group identifier. `name` is the name of the data type and `type_id` is the data type id. This interface corresponds to the 1.6.x version of `H5Tcommit`.

`H5T.commit(loc_id,name,type_id,lcpl_id,tcpl_id,tapl_id)` commits a transient data type to a file, creating a new named data type. `loc_id` is a file or group identifier. `name` is the name of the data type and `type_id` is the data type id. `lcpl_id`, `tcpl_id`, and `tapl_id` are link creation, data type creation, and data type access property list identifiers. This interface corresponds to the 1.8.x version of `H5Tcommit`.

Examples

Create a named variable-length data type.

```
plist_id = 'H5P_DEFAULT';
fid = H5F.create('myfile.h5','H5F_ACC_TRUNC',plist_id,plist_id);
base_type_id = H5T.copy('H5T_NATIVE_DOUBLE');
vlen_type_id = H5T.vlen_create(base_type_id);
H5T.commit(fid,'MyVlen',vlen_type_id);
H5T.close(vlen_type_id);
H5T.close(base_type_id);
H5F.close(fid);
```

See Also

See Also

`H5T.close` | `H5T.committed`

H5T.committed

Determine if data type is committed

Syntax

```
output = H5T.committed(type_id)
```

Description

`output = H5T.committed(type_id)` returns a positive value to indicate that the data type has been committed, and zero to indicate that it has not. A negative value indicates failure.

Examples

```
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
is_committed = H5T.committed(type_id);
```

See Also

See Also

`H5T.commit`

H5T.copy

Copy data type

Syntax

```
output_type_id = H5T.copy(type_id)
```

Description

`output_type_id = H5T.copy(type_id)` copies the existing data type identifier, a dataset identifier specified by `type_id`, or a predefined data type such as `'H5T_NATIVE_DOUBLE'`. `output_type_id` is a data type identifier.

Examples

```
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
type_size = H5T.get_size(type_id);
```

See Also

See Also

`H5T.get_size`

H5T.create

Create new data type

Syntax

```
output = H5T.create(class_id,size)
```

Description

`output = H5T.create(class_id,size)` creates a new data type of the class specified by `class_id`, with the number of bytes specified by `size`. The `output` argument is a data type identifier.

Examples

Create a signed 32-bit enumerated data type.

```
type_id = H5T.create('H5T_ENUM',4);
H5T.set_order(type_id,'H5T_ORDER_LE');
H5T.set_sign(type_id,'H5T_SGN_2');
H5T.enum_insert(type_id,'black',0);
H5T.enum_insert(type_id,'white',1);
```

See Also

See Also

`H5T.set_order` | `H5T.set_sign`

H5T.detect_class

Determine of data type contains specific class

Syntax

```
output = H5T.detect_class(type_id,class_id)
```

Description

`output = H5T.detect_class(type_id,class_id)` returns a positive value if the data type specified in `type_id` contains any data types of the data type class specified in `class_id`, or zero to indicate that it does not. A negative value indicates failure.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/vlen');
type_id = H5D.get_type(dset_id);
has_double = H5T.detect_class(type_id,'H5T_FLOAT');
```

See Also

See Also

`H5D.get_type`

H5T.equal

Determine equality of data types

Syntax

```
output = H5T.equal(type1_id,type2_id)
```

Description

`output = H5T.equal(type1_id,type2_id)` returns a positive number if the data type identifiers refer to the same data type, and zero to indicate that they do not. A negative value indicates failure. Either of the input values could be a character vector specifying an HDF5 data type.

Examples

Determine if the data type of a dataset is a 32-bit little endian integer.

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer2D');
dtype_id = H5D.get_type(dset_id);
if H5T.equal(dtype_id,'H5T_STD_I32LE')
    fprintf('32-bit little endian integer\n');
end
```

See Also

See Also

`H5D.get_type`

H5T.get_class

Data type class identifier

Syntax

```
class_id = H5T.get_class(type_id)
```

Description

`class_id = H5T.get_class(type_id)` returns the data type class identifier of the data type specified by `type_id`.

Valid class identifiers include:

```
'H5T_INTEGER'
'H5T_FLOAT'
'H5T_STRING'
'H5T_BITFIELD'
'H5T_OPAQUE'
'H5T_COMPOUND'
'H5T_ENUM'
'H5T_VLEN'
'H5T_ARRAY'
```

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/enum');
type_id = H5D.get_type(dset_id);
class_id = H5T.get_class(type_id);
switch(class_id)
    case H5ML.get_constant_value('H5T_INTEGER')
```

```
        fprintf('Integer\n');
    case H5ML.get_constant_value('H5T_FLOAT')
        fprintf('Floating point\n');
    case H5ML.get_constant_value('H5T_STRING')
        fprintf('String\n');
    case H5ML.get_constant_value('H5T_BITFIELD')
        fprintf('Bitfield\n');
    case H5ML.get_constant_value('H5T_OPAQUE')
        fprintf('Opaque\n');
    case H5ML.get_constant_value('H5T_COMPOUND')
        fprintf('Compound'\n');
    case H5ML.get_constant_value('H5T_ENUM')
        fprintf('Enumerated\n');
    case H5ML.get_constant_value('H5T_VLEN')
        fprintf('Variable length\n');
    case H5ML.get_constant_value('H5T_ARRAY')
        fprintf('Array\n');
end
```

See Also

See Also

H5ML.get_constant_value

H5T.get_create_plist

Copy of data type creation property list

Syntax

```
plist_id = H5T.get_create_plist(datatype_id)
```

Description

`plist_id = H5T.get_create_plist(datatype_id)` returns a property list identifier for the data type creation property list associated with the data type specified by `datatype_id`.

See Also

See Also

`H5D.get_create_plist` | `H5F.get_create_plist`

H5T.get_native_type

Native data type of dataset data type

Syntax

```
output = H5T.get_native_type(type_id,direction)
```

Description

`output = H5T.get_native_type(type_id,direction)` returns the equivalent native data type for the dataset data type specified in `type_id`. The `direction` argument indicates the order in which the library searches for a native data type match and must be either `'H5T_DIR_ASCEND'` or `'H5T_DIR_DESCEND'`.

H5T.get_size

Size of data type in bytes

Syntax

```
type_size = H5T.get_size(type_id)
```

Description

`type_size = H5T.get_size(type_id)` returns the size of a data type in bytes. `type_id` is a data type identifier.

Examples

Determine the size of the data type for a specific dataset.

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/bitfield2D');
type_id = H5D.get_type(dset_id);
type_size = H5T.get_size(type_id);
```

See Also

See Also

`H5D.get_type` | `H5T.set_size`

H5T.get_super

Base data type

Syntax

```
super_type_id = H5T.get_super(type_id)
```

Description

`super_type_id = H5T.get_super(type_id)` returns the base data type from which the data type type specified by `type_id` is derived.

Examples

Retrieve the base data type for an enumerated dataset.

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/enum');
dtype_id = H5D.get_type(dset_id);
super_type_id = H5T.get_super(dtype_id);
```

H5T.lock

Lock data type

Syntax

```
H5T.lock(type_id)
```

Description

`H5T.lock(type_id)` locks the data type specified by `type_id`, making it read-only and non-destructible.

H5T.open

Open named data type

Syntax

```
type_id = H5T.open(loc_id,name)
```

Description

`type_id = H5T.open(loc_id,name)` opens a named data type at the location specified by `loc_id` and returns an identifier for the data type. `loc_id` is either a file or group identifier.

This function corresponds to the `H5Topen1` function in the HDF5 library C API.

See Also

See Also

`H5A.open` | `H5D.open` | `H5G.open` | `H5O.open` | `H5T.close`

H5T.array_create

Create array data type object

Syntax

```
array_type_id = H5T.array_create(base_id,h5_dims)
array_type_id = H5T.array_create(base_id,rank,h5_dims,perms)
```

Description

`array_type_id = H5T.array_create(base_id,h5_dims)` creates a new array data type object. This interface corresponds to the 1.8 library version of `H5Tarray_create`.

`array_type_id = H5T.array_create(base_id,rank,h5_dims,perms)` creates a new array data type object. This interface corresponds to the 1.6 library version of `H5Tarray_create`. The `perms` parameter is not used at this time and can be omitted.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. The `h5_dims` parameter assumes C-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

Create a 100-by-200 double precision array data type.

```
base_type_id = H5T.copy('H5T_NATIVE_DOUBLE');
dims = [100 200];
h5_dims = fliplr(dims);
array_type = H5T.array_create(base_type_id,h5_dims);
```

See Also

See Also

`H5T.get_array_dims` | `H5T.get_array_ndims`

H5T.get_array_dims

Array dimension extents

Syntax

```
dimsizes = H5T.get_array_dims(type_id)
[ndims,dimsizes,perm] = H5T.get_array_dims(type_id)
```

Description

`dimsizes = H5T.get_array_dims(type_id)` returns the sizes of the dimensions and the dimension permutations of the specified array data type object. This interface corresponds to the 1.8 version of `H5Tget_array_dims`.

`[ndims,dimsizes,perm] = H5T.get_array_dims(type_id)` corresponds to the 1.6 version of the interface. It is strongly deprecated.

Note: The HDF5 library uses C-style ordering for multidimensional arrays, while MATLAB uses FORTRAN-style ordering. Please consult "Using the MATLAB Low-Level HDF5 Functions" in the MATLAB documentation for more information.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/array2D');
type_id = H5D.get_type(dset_id);
h5_dims = H5T.get_array_dims(type_id);
dims = fliplr(h5_dims);
```

See Also

See Also

`H5T.array_create` | `H5T.get_array_ndims`

H5T.get_array_ndims

Rank of array data type

Syntax

```
output = H5T.get_array_ndims(type_id)
```

Description

`output = H5T.get_array_ndims(type_id)` returns the rank, the number of dimensions, of an array data type object.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/array2D');
type_id = H5D.get_type(dset_id);
ndims = H5T.get_array_ndims(type_id);
```

See Also

See Also

`H5T.get_array_dims`

H5T.get_cset

Character set of string data type

Syntax

```
cset = H5T.get_cset(type_id)
```

Description

`cset = H5T.get_cset(type_id)` returns the character set type of the data type specified by `type_id`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/string');
type_id = H5D.get_type(dset_id);
cset = H5T.get_cset(type_id);
switch(cset)
  case H5ML.get_constant_value('H5T_CSET_ASCII')
      fprintf('ASCII\n');
  case H5ML.get_constant_value('H5T_CSET_UTF8')
      fprintf('UTF-8\n');
end
```

See Also

See Also

`H5T.set_cset`

H5T.get_ebias

Exponent bias of floating-point type

Syntax

```
output = H5T.get_ebias(type_id)
```

Description

`output = H5T.get_ebias(type_id)` returns the exponent bias of a floating-point type. `type_id` is data type identifier.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/float');
type_id = H5D.get_type(dset_id);
ebias = H5T.get_ebias(type_id);
```

See Also

See Also

`H5T.set_ebias`

H5T.get_fields

Floating-point data type bit field information

Syntax

```
[spos,epos,esize,mpos,msize] = H5T.get_fields(type_id)
```

Description

`[spos,epos,esize,mpos,msize] = H5T.get_fields(type_id)` returns information about the locations of the various bit fields of a floating point data type. `type_id` is a data type identifier. `spos` is the floating-point sign bit. `epos` is the exponent bit-position. `esize` is the size of the exponent in bits. `mpos` is the mantissa bit-position. `msize` is the size of the mantissa in bits.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/float');
type_id = H5D.get_type(dset_id);
[spos, epos, esize, mpos, msize] = H5T.get_fields(type_id);
```

H5T.get_inpad

Internal padding type for floating-point data types

Syntax

```
pad_type = H5T.get_inpad(type_id)
```

Description

`pad_type = H5T.get_inpad(type_id)` returns the internal padding type for unused bits in floating-point data types. `type_id` is a data type identifier. `pad_type` can be `H5T_PAD_ZERO`, `H5T_PAD_ONE`, or `H5T_PAD_BACKGROUND`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/float');
type_id = H5D.get_type(dset_id);
pad_type = H5T.get_inpad(type_id);
switch(pad_type)
    case H5ML.get_constant_value('H5T_PAD_ZERO')
        fprintf('pad zero\n');
    case H5ML.get_constant_value('H5T_PAD_ONE');
        fprintf('pad one\n');
    case H5ML.get_constant_value('H5T_PAD_BACKGROUND')
        fprintf('pad background\n');
end
```

See Also

See Also

`H5T.set_inpad`

H5T.get_norm

Mantissa normalization type

Syntax

```
norm_type = H5T.get_norm(type_id)
```

Description

`norm_type = H5T.get_norm(type_id)` returns the mantissa normalization of a floating-point data type. `type_id` is a data type identifier. `norm_type` can be `H5T_NORM_IMPLIED`, `H5T_NORM_MSBSET`, or `H5T_NORM_NONE`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/float');
type_id = H5D.get_type(dset_id);
norm_type = H5T.get_norm(type_id);
switch(norm_type)
    case H5ML.get_constant_value('H5T_NORM_IMPLIED')
        fprintf('MSB of mantissa is not stored, always 1\n');
    case H5ML.get_constant_value('H5T_NORM_MSBSET');
        fprintf('MSB of mantissa is always 1\n');
    case H5ML.get_constant_value('H5T_NORM_NONE')
        fprintf('mantissa is not normalized\n');
end
```

See Also

See Also

`H5T.set_norm`

H5T.get_offset

Bit offset of first significant bit

Syntax

```
offset = H5T.get_offset(type_id)
```

Description

`offset = H5T.get_offset(type_id)` returns the offset of the first significant bit. `type_id` is a data type identifier.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/float');
type_id = H5D.get_type(dset_id);
offset = H5T.get_offset(type_id);
```

See Also

See Also

`H5T.set_offset`

H5T.get_order

Byte order of atomic data type

Syntax

```
output = H5T.get_order(type_id)
```

Description

`output = H5T.get_order(type_id)` returns the byte order of an atomic data type. `type_id` is a data type identifier. Possible return values are the constant values corresponding to the following character vectors:

`'H5T_ORDER_LE'`

`'H5T_ORDER_BE'`

`'H5T_ORDER_VAX'`

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g2/dset2.2');
type_id = H5D.get_type(dset_id);
switch(H5T.get_order(type_id))
    case H5ML.get_constant_value('H5T_ORDER_LE')
        fprintf('little endian\n');
    case H5ML.get_constant_value('H5T_ORDER_BE')
        fprintf('big endian\n');
    case H5ML.get_constant_value('H5T_ORDER_VAX')
        fprintf('vax\n');
end
```

See Also

See Also

`H5ML.get_constant_value` | `H5T.set_order`

H5T.get_pad

Padding type of least and most-significant bits

Syntax

```
[lsb,msb] = H5T.get_pad(type_id)
```

Description

`[lsb,msb] = H5T.get_pad(type_id)` returns the padding type of the least and most-significant bit padding. `type_id` is a data type identifier. `lsb` is the least-significant bit padding type. `msb` is the most-significant bit padding type. Values for `lsb` and `msb` can be `H5T_PAD_ZERO`, `H5T_PAD_ONE`, or `H5T_PAD_BACKGROUND`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
type_id = H5D.get_type(dset_id);
[lsb,msb] = H5T.get_pad(type_id);
switch(lsb)
    case H5ML.get_constant_value('H5T_PAD_ZERO')
        fprintf('lsb pad type is zeros\n');
    case H5ML.get_constant_value('H5T_PAD_ONE');
        fprintf('lsb pad type is ones\n');
    case H5ML.get_constant_value('H5T_PAD_BACKGROUND')
        fprintf('lsb pad type is background\n');
end
switch(msb)
    case H5ML.get_constant_value('H5T_PAD_ZERO')
        fprintf('msb pad type is zeros\n');
    case H5ML.get_constant_value('H5T_PAD_ONE');
        fprintf('msb pad type is ones\n');
    case H5ML.get_constant_value('H5T_PAD_BACKGROUND')
        fprintf('msb pad type is background\n');
end
```

See Also

See Also

`H5T.set_pad`

H5T.get_precision

Precision of atomic data type

Syntax

```
output = H5T.get_precision(type_id)
```

Description

`output = H5T.get_precision(type_id)` returns the precision of an atomic data type. `type_id` is a data type identifier.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
type_id = H5D.get_type(dset_id);
numbits = H5T.get_precision(type_id);
```

See Also

See Also

`H5T.set_precision`

H5T.get_sign

Sign type for integer data type

Syntax

```
sign_type = H5T.get_sign(type_id)
```

Description

`sign_type = H5T.get_sign(type_id)` returns the sign type for an integer type. `type_id` is a data type identifier. Valid types are: `H5T_SGN_NONE` or `H5T_SGN_2`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/integer');
type_id = H5D.get_type(dset_id);
sign_type = H5T.get_sign(type_id);
switch(sign_type)
    case H5ML.get_constant_value('H5T_SGN_NONE')
        fprintf('Unsigned integer type.\n');
    case H5ML.get_constant_value('H5T_SGN_2');
        fprintf('Signed integer type.\n');
end
```

See Also

See Also

`H5T.set_sign`

H5T.get_strpad

Storage mechanism for string data type

Syntax

```
output = H5T.get_strpad(type_id)
```

Description

`output = H5T.get_strpad(type_id)` returns the storage mechanism (padding type) for a string data type. Possible values are:

`'H5T_STR_NULLPAD'`	Pad with zeros
`'H5T_STR_NULLTERM'`	Null-terminate
`'H5T_STR_SPACEPAD'`	Pad with spaces

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/string');
type_id = H5D.get_type(dset_id);
padding = H5T.get_strpad(type_id);
switch(padding)
    case H5ML.get_constant_value('H5T_STR_NULLTERM')
        fprintf('null-terminated\n');
    case H5ML.get_constant_value('H5T_STR_NULLPAD')
        fprintf('padded with zeros\n');
    case H5ML.get_constant_value('H5T_STR_SPACEPAD')
        fprintf('padded with spaces\n');
end
```

See Also

See Also

`H5T.set_strpad`

H5T.set_cset

Set character dataset for string data type

Syntax

```
H5T.set_cset(type_id, cset)
```

Description

`H5T.set_cset(type_id, cset)` sets the character encoding used to create strings. The only valid type is `H5T_CSET_ASCII`.

Examples

```
type_id = H5T.copy('H5T_C_S1');
H5T.set_size(type_id,10);
encoding = H5ML.get_constant_value('H5T_CSET_ASCII');
H5T.set_cset(type_id,encoding);
```

See Also

See Also

`H5T.get_cset`

H5T.set_ebias

Set exponent bias of floating-point data type

Syntax

```
H5T.set_ebias(type_id,ebias)
```

Description

`H5T.set_ebias(type_id,ebias)` sets the exponent bias of a floating-point type. `type_id` is a data type identifier. `ebias` is an exponent bias value.

Examples

```
type_id = H5T.copy('H5T_NATIVE_FLOAT');
H5T.set_size(type_id,32);
H5T.set_ebias(type_id,99);
```

See Also

See Also

`H5T.get_ebias`

H5T.set_fields

Set sizes and locations of floating-point bit fields

Syntax

```
H5T.set_fields(type_id,spos,epos,esize,mpos,msize)
```

Description

`H5T.set_fields(type_id,spos,epos,esize,mpos,msize)` sets the locations and sizes of the various floating-point bit fields. `spos` is the sign position. `epos` is the exponent in bits. `esize` is the size of exponent in bits. `mpos` is the mantissa bit position. `msize` is the size of the mantissa in bits.

Examples

```
type_id = H5T.copy('H5T_NATIVE_DOUBLE');
H5T.set_fields(type_id,30,24,6,0,2);
```

See Also

See Also

`H5T.get_fields`

H5T.set_inpad

Specify how unused internal bits are to be filled

Syntax

```
H5T.set_inpad(type_id,pad)
```

Description

`H5T.set_inpad(type_id,pad)` sets how unused internal bits of a floating point type are filled. `type_id` is the identifier of the data type. `inpad` specifies how to fill the bits: `H5T_PAD_ZERO`, `H5T_PAD_ONE`, or `H5T_PAD_BACKGROUND` (leave background alone).

Examples

```
type_id = H5T.copy('H5T_NATIVE_FLOAT');
pad_type = H5ML.get_constant_value('H5T_PAD_ZERO');
H5T.set_inpad(type_id,pad_type);
```

See Also

See Also

`H5T.get_inpad`

H5T.set_norm

Set mantissa normalization of floating-point data type

Syntax

```
H5T.set_norm(type_id,norm)
```

Description

`H5T.set_norm(type_id,norm)` sets the mantissa normalization of a floating-point data type. Valid normalization types are: `H5T_NORM_IMPLIED`, `H5T_NORM_MSBSET`, or `H5T_NORM_NONE`.

Examples

```
type_id = H5T.copy('H5T_NATIVE_FLOAT');
norm_type = H5ML.get_constant_value('H5T_NORM_MSBSET');
H5T.set_norm(type_id,norm_type);
```

See Also

See Also

`H5T.get_norm`

H5T.set_offset

Set bit offset of first significant bit

Syntax

```
H5T.set_offset(type_id,offset)
```

Description

`H5T.set_offset(type_id,offset)` sets the bit offset of the first significant bit. `type_id` is the identifier of the data type. `offset` specifies the number of bits of padding that appear.

Examples

```
type_id = H5T.copy('H5T_NATIVE_INT');
H5T.set_offset(type_id,16);
```

See Also

See Also

`H5T.get_offset`

H5T.set_order

Set byte ordering of atomic data type

Syntax

```
H5T.set_order(type_id,type_order)
```

Description

`H5T.set_order(type_id,type_order)` sets the byte ordering of an atomic data type. `type_order` can be one of the following values:

```
H5T_ORDER_LE
H5T_ORDER_BE
H5T_ORDER_VAX
```

Examples

Create a big endian 32-bit integer type.

```
type_id = H5T.copy('H5T_NATIVE_INT');
order = H5ML.get_constant_value('H5T_ORDER_BE');
H5T.set_order(type_id,order);
```

See Also

See Also

`H5ML.get_constant_value` | `H5T.get_order`

H5T.set_pad

Set padding type for least and most significant bits

Syntax

```
H5T.set_pad(type_id,lsb,msb)
```

Description

`H5T.set_pad(type_id,lsb,msb)` sets the padding type for the least and most-significant bits. `type_id` is the identifier of the data type. `lsb` specifies the padding type for least-significant bits; `msb` for most-significant bits. Valid padding types are `H5T_PAD_ZERO`, `H5T_PAD_ONE`, or `H5T_PAD_BACKGROUND` (leave background alone).

Examples

```
type_id = H5T.copy('H5T_NATIVE_INT');
lsb = H5ML.get_constant_value('H5T_PAD_ONE');
msb = H5ML.get_constant_value('H5T_PAD_ZERO');
H5T.set_pad(type_id,lsb,msb);
```

See Also

See Also

`H5T.get_pad`

H5T.set_precision

Set precision of atomic data type

Syntax

```
H5T.set_precision(type_id,prec)
```

Description

`H5T.set_precision(type_id,prec)` sets the precision of an atomic data type. `type_id` is a data type identifier. `prec` specifies the number of bits of precision for the data type.

H5T.set_sign

Set sign property for integer data type

Syntax

```
H5T.set_sign(type_id,sign)
```

Description

`H5T.set_sign(type_id,sign)` sets the sign property for an integer type. `type_id` is a data type identifier. `sign` specifies the sign type. Valid values are `H5T_SGN_NONE` or `H5T_SGN_2`.

Examples

```
type_id = H5T.copy('H5T_NATIVE_LONG');
sgn = H5ML.get_constant_value('H5T_SGN_NONE');
H5T.set_sign(type_id,sgn);
```

See Also

See Also

`H5T.get_sign`

H5T.set_size

Set size of data type in bytes

Syntax

```
H5T.set_size(type_id,type_size)
```

Description

`H5T.set_size(type_id,type_size)` sets the total size in bytes for the data type specified by `type_id`. If a variable length string is desired then `type_size` can be specified as `'H5T_VARIABLE'`.

Examples

Create a variable length string with null termination.

```
type_id = H5T.copy('H5T_C_S1');
H5T.set_size(type_id,'H5T_VARIABLE');
H5T.set_strpad(type_id,'H5T_STR_NULLTERM');
```

See Also

See Also

`H5T.get_size`

H5T.set_strpad

Set storage mechanism for string data type

Syntax

```
H5T.set_strpad(type_id,storage_type)
```

Description

`H5T.set_strpad(type_id,storage_type)` defines the storage mechanism for the string data type identified by `type_id`. The storage type may be one of the following values.

`'H5T_STR_NULLTERM'`	Null terminated
`'H5T_STR_NULLPAD'`	Padded with zeros
`'H5T_STR_SPACEPAD'`	Padded with spaces

Examples

Create a ten-character string data type with space padding.

```
type_id = H5T.copy('H5T_C_S1');
H5T.set_size(type_id,10);
H5T.set_strpad(type_id,'H5T_STR_SPACEPAD');
```

See Also

See Also

`H5T.get_strpad`

H5T.get_member_class

Data type class for compound data type member

Syntax

```
output = H5T.get_member_class(type_id,membno)
```

Description

`output = H5T.get_member_class(type_id,membno)` returns the data type class of the compound data type member specified by `membno`. The `type_id` argument is the data type identifier of a compound object.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/compound');
type_id = H5D.get_type(dset_id);
member_name = H5T.get_member_name(type_id,0);
member_class = H5T.get_member_class(type_id,0);
```

See Also

See Also

`H5T.get_member_name`

H5T.get_member_index

Index of compound or enumeration type member

Syntax

```
idx = H5T.get_member_index(type_id,name)
```

Description

`idx = H5T.get_member_index(type_id,name)` returns the index of a field of a compound data type or an element of an enumeration data type. `type_id` is a data type identifier and name is a character vector that specifies the target field or element.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/compound');
type_id = H5D.get_type(dset_id);
idx = H5T.get_member_index(type_id,'b');
```

See Also

See Also

`H5T.get_member_name`

H5T.get_member_name

Name of compound or enumeration type member

Syntax

```
name = H5T.get_member_name(type_id,membno)
```

Description

`name = H5T.get_member_name(type_id,membno)` returns the name of a field of a compound data type or an element of an enumeration data type. `type_id` is a data type identifier. `membno` is a zero-based index of the field or element whose name is to be retrieved.

Examples

Determine the name of the first field of a compound dataset.

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/compound');
dtype_id = H5D.get_type(dset_id);
member_name = H5T.get_member_name(dtype_id,0);
```

See Also

See Also

`H5T.get_member_index`

H5T.get_member_offset

Offset of field of compound data type

Syntax

```
output = H5T.get_member_offset(type_id,membno)
```

Description

`output = H5T.get_member_offset(type_id,membno)` returns the byte offset of the field specified by `membno` in the compound data type specified by `type_id`. Note that zero (0) is a valid offset.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/compound');
type_id = H5D.get_type(dset_id);
idx = H5T.get_member_offset(type_id,1);
```

See Also

See Also

`H5T.get_member_name`

H5T.get_member_type

Data type of specified member

Syntax

```
type_id = H5T.get_member_type(type_id,membno)
```

Description

`type_id = H5T.get_member_type(type_id,membno)` returns the data type of the member specified by `membno` in the data type specified by `type_id`.

Examples

Get the size of the data type of the first member of a compound data type.

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/compound');
compound_type_id = H5D.get_type(dset_id);
member_type_id = H5T.get_member_type(compound_type_id,0);
type_size = H5T.get_size(member_type_id);
```

See Also

See Also

`H5D.get_type`

H5T.get_nmembers

Number of elements in enumeration type

Syntax

```
output = H5T.get_nmembers(type_id)
```

Description

`output = H5T.get_nmembers(type_id)` retrieves the number of fields in a compound data type or the number of members of an enumeration data type. `type_id` is a data type identifier.

Examples

Determine the number of fields in a compound dataset.

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/compound');
dtype_id = H5D.get_type(dset_id);
nmembers = H5T.get_nmembers(dtype_id);
```

H5T.insert

Add member to compound data type

Syntax

```
H5T.insert(type_id,name,offset,member_datatype)
```

Description

`H5T.insert(type_id,name,offset,member_datatype)` adds another member to the compound data type specified by `type_id`. The `name` argument is a character vector that specifies the name of the new member, which must be unique in the compound data type. `offset` specifies where you want to insert the new member and `member_datatype` specifies the data type identifier of the new member.

Examples

```
type_id = H5T.create('H5T_COMPOUND',16);
H5T.insert(type_id,'first',0,'H5T_NATIVE_DOUBLE');
H5T.insert(type_id,'second',8,'H5T_NATIVE_INT');
H5T.insert(type_id,'third',12,'H5T_NATIVE_UINT');
```

See Also

See Also

`H5T.create`

H5T.pack

Recursively remove padding from compound data type

Syntax

```
H5T.pack(type_id)
```

Description

`H5T.pack(type_id)` recursively removes padding from within a compound data type to make it more efficient (space-wise) to store that data. `type_id` is a data type identifier.

H5T.enum_create

Create new enumeration data type

Syntax

```
output = H5T.enum_create(parent_id)
```

Description

`output = H5T.enum_create(parent_id)` creates a new enumeration data type based on the specified base data type, `parent_id`, which must be an integer type. `output` is a data type identifier for the new enumeration data type.

Examples

```
parent_id = H5T.copy('H5T_NATIVE_UINT');
type_id = H5T.enum_create(parent_id);
H5T.enum_insert(type_id,'red',1);
H5T.enum_insert(type_id,'green',2);
H5T.enum_insert(type_id,'blue',3);
H5T.close(type_id);
H5T.close(parent_id);
```

See Also

See Also

`H5T.enum_insert`

H5T.enum_insert

Insert enumeration data type member

Syntax

```
H5T.enum_insert(type_id,name,value)
```

Description

`H5T.enum_insert(type_id,name,value)` inserts a new enumeration data type member into the enumeration data type specified by `type_id`. The `name` argument is a character vector that specifies the name of the new member of the enumeration and `value` is the value of the member.

Examples

```
parent_id = H5T.copy('H5T_NATIVE_UINT');
type_id = H5T.enum_create(parent_id);
H5T.enum_insert(type_id,'red',1);
H5T.enum_insert(type_id,'green',2);
H5T.enum_insert(type_id,'blue',3);
H5T.close(type_id);
H5T.close(parent_id);
```

See Also

See Also

`H5T.enum_create`

H5T.enum_nameof

Name of enumeration data type member

Syntax

```
name = H5T.enum_nameof(type_id,value)
```

Description

`name = H5T.enum_nameof(type_id,value)` returns the symbol name corresponding to a member of an enumeration data type. `type_id` specifies the enumeration data type. `value` identifies the member of the enumeration.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/enum');
type_id = H5D.get_type(dset_id);
name0 = H5T.enum_nameof(type_id,int32(0));
name1 = H5T.enum_nameof(type_id,int32(1));
```

See Also

See Also

`H5T.enum_valueof`

H5T.enum_valueof

Value of enumeration data type member

Syntax

```
value = H5T.enum_valueof(type_id,member_name)
```

Description

`value = H5T.enum_valueof(type_id,member_name)` returns the value corresponding to a specified member of an enumeration data type. `type_id` specifies the enumeration data type and `member_name` specifies the member.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/enum');
type_id = H5D.get_type(dset_id);
num_members = H5T.get_nmembers(type_id);
for j = 1:num_members
    member_name{j} = H5T.get_member_name(type_id,j-1);
    member_value(j) = H5T.enum_valueof(type_id,member_name{j});
end
```

See Also

See Also

`H5T.get_member_name` | `H5T.get_nmembers`

H5T.get_member_value

Value of enumeration data type member

Syntax

```
value = H5T.get_member_value(type_id,membno)
```

Description

`value = H5T.get_member_value(type_id,membno)` returns the value of the enumeration data type member specified by `membno`. The `type_id` argument is the data type identifier for the enumeration data type.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/enum');
type_id = H5D.get_type(dset_id);
num_members = H5T.get_nmembers(type_id);
for j = 1:num_members
    member_name{j} = H5T.get_member_name(type_id,j-1);
    member_value(j) = H5T.get_member_value(type_id,j-1);
end
```

See Also

See Also

`H5T.get_member_name` | `H5T.get_nmembers`

H5T.get_tag

Tag associated with opaque data type

Syntax

```
tag = H5T.get_tag(type_id)
```

Description

`tag = H5T.get_tag(type_id)` returns the tag associated with the opaque data type specified by `type_id`.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/opaque');
dtype_id = H5D.get_type(dset_id);
tag = H5T.get_tag(dtype_id);
```

See Also

See Also

`H5T.set_tag`

H5T.set_tag

Tag opaque data type with description

Syntax

```
H5T.set_tag(type_id,tag)
```

Description

`H5T.set_tag(type_id,tag)` tags the opaque data type specified by `type_id`, with the descriptive text, `tag`.

Examples

Create an opaque data type with a length of 4 bytes and a particular tag.

```
type_id = H5T.create('H5T_OPAQUE',4);
H5T.set_tag(type_id,'Created by MATLAB.');
```

See Also

See Also

`H5T.create` | `H5T.get_tag`

H5T.is_variable_str

Determine if data type is variable-length string

Syntax

```
output = H5T.is_variable_str(type_id)
```

Description

`output = H5T.is_variable_str(type_id)` returns a positive value if the data type specified by `type_id` is a variable-length string and zero if it is not. A negative value indicates failure.

Examples

```
fid = H5F.open('example.h5');
dset_id = H5D.open(fid,'/g3/VLstring2D');
type_id = H5D.get_type(dset_id);
if H5T.is_variable_str(type_id) > 0
    fprintf('variable length string\n');
end
```

See Also

See Also

`H5D.get_type` | `H5T.get_size` | `H5T.vlen_create`

H5T.vlen_create

Create new variable-length data type

Syntax

```
vlen_type_id = H5T.vlen_create(base_id)
```

Description

`vlen_type_id = H5T.vlen_create(base_id)` creates a new variable-length (VL) data type. `base_id` specifies the base type of the data type to create.

Examples

Create a variable length data type for 64-bit floating-point numbers.

```
base_type_id = H5T.copy('H5T_NATIVE_DOUBLE');
vlen_type_id = H5T.vlen_create(base_type_id);
```

See Also

See Also

`H5T.is_variable_str`

H5Z.filter_avail

Determine if filter is available

Syntax

```
output = H5Z.filter_avail(filter_id)
```

Description

`output = H5Z.filter_avail(filter_id)` determines whether the filter specified by the filter identifier is available to the application. `filter_id` can be specified by one of the following character vectors or its numeric equivalent.

```
'H5Z_FILTER_DEFLATE'
'H5Z_FILTER_SHUFFLE'
'H5Z_FILTER_FLETCHER32'
'H5Z_FILTER_SZIP'
'H5Z_FILTER_NBIT'
'H5Z_FILTER_SCALEOFFSET'
```

Examples

Determine if the shuffle filter is available.

```
bool = H5Z.filter_avail('H5Z_FILTER_SHUFFLE');
```

See Also

See Also

`H5ML.get_constant_value`

H5Z.get_filter_info

Information about filter

Syntax

```
filter_config_flags = H5Z.get_filter_info(filter)
```

Description

`filter_config_flags = H5Z.get_filter_info(filter)` retrieves information about the filter specified by its identifier. At present, the information returned is the filter's configuration flags, indicating whether the filter is configured to decode data, to encode data, neither, or both. `filter_config_flags` should be used with the HDF5 constant values `H5Z_FILTER_CONFIG_ENCODE_ENABLED` and `H5Z_FILTER_CONFIG_DECODE_ENABLED` in a bitwise AND operation. If the resulting value is 0, then the encode or decode functionality is not available.

Examples

Determine if encoding is enabled for the deflate filter.

```
flags = H5Z.get_filter_info('H5Z_FILTER_DEFLATE');
functionality = H5ML.get_constant_value('H5Z_FILTER_CONFIG_ENCODE_ENABLED');
enabled = bitand(flags,functionality) > 0;
```

See Also

See Also

`bitand` | `H5ML.get_constant_value` | `H5Z.filter_avail`

hadamard

Hadamard matrix

Syntax

```
H = hadamard(n)
```

Description

`H = hadamard(n)` returns the Hadamard matrix of order `n`.

Examples

Compute Hadamard Matrix

Compute the 4-by-4 Hadamard matrix.

```
H = hadamard(4)
```

```
H =

     1     1     1     1
     1    -1     1    -1
     1     1    -1    -1
     1    -1    -1     1
```

Definitions

Hadamard Matrix

Hadamard matrices are matrices of `1`'s and `-1`'s whose columns are orthogonal,

```
H'*H = n*I
```

where `[n n]=size(H)` and `I = eye(n,n)`.

They have applications in several different areas, including combinatorics, signal processing, and numerical analysis, [1], [2].

An `n`-by-`n` Hadamard matrix with `n > 2` exists only if `rem(n,4) = 0`. This function handles only the cases where `n`, `n/12`, or `n/20` is a power of 2.

References

[1] Ryser, H. J., *Combinatorial Mathematics*, John Wiley and Sons, 1963.

[2] Pratt, W. K., *Digital Signal Processing*, John Wiley and Sons, 1978.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- `n` must be a fixed-size scalar.

See Also

`compan` | `hankel` | `toeplitz`

Introduced before R2006a

handle class

Abstract class for deriving handle classes

Description

`classdef` *`MyHandleClass`* `<` `handle` makes *`MyHandleClass`* a subclass of the `handle` class.

The `handle` class is the superclass for all classes that follow handle semantics. A *handle* is a reference to an object. If you copy an object's handle variable, MATLAB copies only the handle. Both the original and copy refer to the same object. For example, if a function modifies a handle object passed as an input argument, the modification affects the original input object.

In contrast, nonhandle objects (that is, value objects) are not references. Functions must return modified value objects to change the object outside of the function's workspace.

See “Object Modification” for information on passing objects to functions.

If you want to create a class that defines events, you must derive that class from the `handle` class.

The `handle` class is an abstract class, so you cannot create an instance of this class directly. You use the `handle` class to derive other classes, which can be concrete classes whose instances are handle objects. See “Handle Classes” for information on using handle classes.

Methods

addlistener	Create event listener
delete	Delete handle object
findobj	Find handle objects
findprop	Find `meta.property` object
isvalid	Determine valid handles

notify	Notify listeners that event is occurring
relationaloperators	Determine equality or sort handle objects

Events

`ObjectBeingDestroyed`	Triggered when the handle object is about to be destroyed, but before calling the delete method. Listener callbacks execute before MATLAB destroys the handle object.

Destroying Handle Objects

MATLAB destroys handle objects when there are no references to the object. You can explicitly remove a handle object by calling its delete method. The `handle` class enables you to control what happens when handle objects are destroyed, either implicitly when no references exist or explicitly when you delete the object.

Define `delete` Method in Subclass

Subclasses of `handle` can define their own `delete` method. MATLAB calls this method when deleting an object of the subclass, enabling your subclass to perform any specific actions necessary before deleting an object.

For more information, see “Handle Class Destructor”.

Create Listener for `ObjectBeingDestroyed` Event

Any code can respond to the pending deletion of a handle object by defining a listener for that object’s `ObjectBeingDestroyed` event. MATLAB triggers this event before calling the object’s `delete` method.

For more information on using events and listeners, see “Events and Listeners Syntax”.

Attributes

`Abstract`	`true`

`ConstructOnLoad` `true`

`HandleCompatible` `true`

To learn about attributes of classes, see Class Attributes in the MATLAB Object-Oriented Programming documentation.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Derive Class from `handle`

Derive `MyClass` from `handle`:

```
classdef MyClass < handle
   properties
      Prop1
   end
   events
      Event1
   end
   methods
      function obj = MyClass(arg)
         if nargin > 0
            obj.Prop1 = arg;
         end
      end
   end
end
```

See Also

Topics

"Handle Classes"

"Events"
"Using Handles"
Class Attributes

Introduced in R2008a

addlistener

Class: handle

Create event listener

Syntax

```
lh = addlistener(Hsource,EventName,callback)
lh = addlistener(Hsource,property,EventName,callback)
```

Description

`lh = addlistener(Hsource,EventName,callback)` creates a listener for the event `EventName` when triggered on the source object, `Hsource`.

If `Hsource` is an array, the listener responds to the named event on any object in the `Hsource` array. `callback` is a function handle referencing the callback function.

`lh = addlistener(Hsource,property,EventName,callback)` creates a listener for one of the predefined property events. There are four predefined property events:

Event Name	Event Occurs
`PreSet`	Immediately before the property value is set, before calling its set access method
`PostSet`	Immediately after the property value is set
`PreGet`	Immediately before a property value query is serviced, before calling its get access method
`PostGet`	Immediately after returning the property value to the query

Input Arguments

`Hsource` — Event source
handle array

Event source is the object that is source of the event, or an array of source objects, specified as a handle array.

`EventName` — Name of event
character vector

Name of event that is triggered on the source objects, specified as case-sensitive, quoted text. For property events, the event name is one of the four predefined property events.

Data Types: `char`

`property` — Name of property
character vector or `meta.property`

Name of the property whose property event triggers your listener, specified as one of these values:

- A character vector or a cell array of character vectors, where each character vector is the name of a property defined for the objects in `Hsource`
- A scalar `meta.property` object
- An array of `meta.property` objects

You can attach listeners to property events on dynamic properties only when `Hsource` is scalar. If `Hsource` is non-scalar, then the properties must belong to the class of `Hsource` and cannot include dynamic properties (which are not part of the class definition).

The class defining the source property must set the `GetObservable` and `SetObservable` property attributes to enable you to listen to the property events.

`callback` — Listener callback
function handle

Listener callback specified as a function handle

Data Types: `function_handle`

Output Arguments

`lh` — listener
`event.listener` or `event.proplistener`

Listener object created by `addlistener`, specified as the handle to an `event.listener` or an `event.proplistener` object.

Attributes

`Access`	`public`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Tips

- To remove a listener, delete the listener object returned by `addlistener`. For example,

  ```
  delete(lh)
  ```

  calls the handle class delete method to delete the object from the workspace and remove the listener.
- Redefining or clearing the variable containing the handle of the listener (for example, `lh`) does not delete the listener. The event object (`Hsource`) still has a reference to the `event.listener` object. `addlistener` ties the listener's lifecycle to the object that is the source of the event.
- To define a listener that is not tied to the event object, use the `event.listener` constructor directly to create the listener.

Alternatives

When you need the lifecycle of the listener object to be independent of the source object lifecycle, use the `event.listener` or `event.proplistener` to create listeners.

See Also

See Also

handle.notify | `event.listener`

Topics

"Overview Events and Listeners"
"Create Property Listeners"
"Listener Lifecycle"

Introduced in R2008a

delete

Class: handle

Delete handle object

Syntax

```
delete(h)
```

Description

`delete(h)` deletes a handle object, but does not clear the handle variable from the workspace. The handle variable is not valid once the handle object has been deleted.

Subclasses of `handle` can implement a method named `delete` to perform cleanup tasks just before MATLAB destroys an object of the class. MATLAB calls the `delete` method of any `handle` object when the object is destroyed when the subclass `delete` method meets certain criteria.

For information on implementing a class destructor for a subclass of `handle`, see "Handle Class Destructor".

Input Arguments

h — Objects to destroy

handle array

Objects to destroy, specified as a handle array.

Attributes

Access	public

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

isvalid

Topics

"Handle Class Destructor"
"Using Handles"

findobj

Class: handle

Find handle objects

Syntax

```
Hmatch = findobj(H)
Hmatch = findobj(H,property,value,...,property,value)
Hmatch = findobj(H,'-not',property,value)
Hmatch = findobj(H,'-regexp',property,value)
Hmatch = findobj(H,property,value,'-logicaloperator',property,value)
Hmatch = findobj(H,'-function',fh)
Hmatch = findobj(H,'-function',property,fh)
Hmatch = findobj(H,'-class',class)
Hmatch = findobj(H,'-isa',class)
Hmatch = findobj(H,'-property',property)
Hmatch = findobj(H,'-method',methodname)
Hmatch = findobj(H,'-event',eventname)
Hmatch = findobj(H,'-depth',d, ___ )
```

Description

`Hmatch = findobj(H)` returns the objects listed in `H` and all of their descendants.

`Hmatch = findobj(H,property,value,...,property,value)` finds `handle` objects that have the specified property set to the specified value.

`Hmatch = findobj(H,'-not',property,value)` inverts the expression in the following `property value` pair. That is, find objects whose specified property is not equal to `value`.

`Hmatch = findobj(H,'-regexp',property,value)` treats the content of the `value` argument as regular expressions.

`Hmatch = findobj(H,property,value,'-logicaloperator',property,value)` applies the logical operator to the name/value pairs. Supported logical operators include:

- `'-or'` (default if you do not specify an operator)
- `'-and'`
- `'-xor'`

`Hmatch = findobj(H,'-function',fh)` calls the function handle `fh` on the objects in `H` and returns the objects for which the function returns `true`.

`Hmatch = findobj(H,'-function',property,fh)` calls the function handle `fh` on the specified property's value for the objects in `H` and returns the objects for which the function returns `true`. The function must return a scalar logical value.

`Hmatch = findobj(H,'-class',class)` finds all objects belonging to the specified class.

`Hmatch = findobj(H,'-isa',class)` finds all objects belonging to the specified class.

`Hmatch = findobj(H,'-property',property)` finds all object in `H` having the named property.

`Hmatch = findobj(H,'-method',methodname)` finds objects that have the specified method name.

`Hmatch = findobj(H,'-event',eventname)` finds objects that have the specified event name.

`Hmatch = findobj(H,'-depth',d, ___ )` specifies how many levels in the instance hierarchies under the objects in `H` to search.

Input Arguments

`H` — Objects to search from

handle array

Objects to search from, specified as an array of object handles. Unless the you specify the `'-depth'` or `'flat'` options, `findobj` searches the objects in the input array `H` and child objects in the instance hierarchy.

`property` — Property name

`char` vector

Property name, specified as case-sensitive, quoted text.

Data Types: `char`

`class` — Class of object to find

object

Class of object to find, specified as case-sensitive, quoted text.

`value` — Property value

any value

Property value, specified as a value or MATLAB expression.

`methodname` — Method name

`char` vector

Method name, specified as case-sensitive quoted text.

`eventname` — Event name

`char` vector

Event name, specified as case-sensitive quoted text.

`d` — Depth of search

integer >= 0

Depth of search, specified as an integer indicating the number of levels below any given object in the input array `H`.

- `d = n` — Search `n` levels of the hierarchy below each object in `H`
- `d = 0` — Search only the same level as the objects in `H`.
- `d = inf` — Search all levels below objects in `H`. This is the default.

`fh` — Function handle

function handle

Function handle, specifying the function that is evaluated for each object in the input array `H`. This function must return a scalar, logical value indicating whether there is a match (`true`) or not (`false`).

Output Arguments

`Hmatch` — Objects found by search
handle array

Objects found by search, returned as a handle array.

Attributes

`Access`	`public`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Object with Specific Property Value

Find the object with a specific property value. Given the `handle` class, `BasicHandle`:

```
classdef BasicHandle < handle
   properties
      Prop1
   end
   methods
      function obj = BasicHandle(val)
         if nargin > 0
            obj.Prop1 = val;
         end
      end
   end
end
```

Create an array of `BasicHandle` objects:

```
h(1) = BasicHandle(7);
h(2) = BasicHandle(11);
h(3) = BasicHandle(27);
```

Find the handle of the object whose `Prop1` property has a value of 7:

```
h7 = findobj(h,'Prop1',7);
h7.Prop1
```

```
ans =

     7
```

Object with Specific Property Name

Find the object with a specific dynamic property. Given the `button` class:

```
classdef button < dynamicprops
   properties
      UiHandle
   end
   methods
      function obj = button(pos)
         if nargin > 0
            if length(pos) == 4
               obj.UiHandle = uicontrol('Position',pos,...
                'Style','pushbutton');
            else
               error('Improper position')
            end
         end
      end
   end
end
```

Create an array of button objects, only one element of which defines a dynamic property. Use `findobj` to get the handle of the object with the dynamic property named `ButtonCoord`:

```
b(1) = button([20 40 80 20]);
addprop(b(1),'ButtonCoord');
b(1).ButtonCoord = [2,3];
b(2) = button([120 40 80 20]);
b(3) = button([220 40 80 20]);

h =  findobj(b,'-property','ButtonCoord');
h.ButtonCoord
```

```
ans =
```

2 3

Tips

- `findobj` has access only to public properties
- If there are no matches, `findobj` returns an empty array of the same class as the input array `H`.
- Logical operator precedence follows MATLAB precedence rules. For more information, see “Operator Precedence”.
- Control precedence by grouping within cell arrays

See Also

See Also

handle.findprop

Introduced in R2008a

findprop

Class: handle

Find `meta.property` object

Syntax

```
mp = findprop(h,property)
```

Description

`mp = findprop(h,property)` returns the `meta.property` object associated with the named property of the object `h`. `property` can be a property defined by the class of `h` or a dynamic property defined only for the object `h`.

Input Arguments

`h` — handle object
handle

Handle object, specified as a scalar handle.

`property` — Name of property
`char` vector

Name of property, specified as case-sensitive, quoted text.

Data Types: `char`

Output Arguments

`mp` — `meta.property` object
`meta.property`

`meta.property` object that is associated with the named property. If `findprop` does not find the property on the object `h`, `findprop` returns a 0-by-1 empty `meta.property` object.

Attributes

Access	public

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

View Property Attribute Settings

Use `findprop` to view property attribute settings:

```
mp = findprop(containers.Map,'Count')
```

```
mp =

  property with properties:

                   Name: 'Count'
            Description: 'Number of pairs in the collection'
    DetailedDescription: ''
              GetAccess: 'public'
              SetAccess: 'private'
              Dependent: 1
               Constant: 0
               Abstract: 0
              Transient: 1
                 Hidden: 0
          GetObservable: 0
          SetObservable: 0
               AbortSet: 0
              GetMethod: []
              SetMethod: []
             HasDefault: 0
```

```
          DefiningClass: [1x1 meta.class]
```

See Also

See Also

handle.findobj | `meta.property`

Topics

"Get Information About Properties"
"Dynamic Properties — Adding Properties to an Instance"

isvalid

Class: handle

Determine valid handles

Syntax

```
B = isvalid(H)
```

Description

`B = isvalid(H)` returns a logical array in which each element is `true` if the corresponding element in `H` is a valid handle. A handle variable becomes invalid if the object has been deleted.

You cannot override the `isvalid` method in `handle` subclasses.

Input Arguments

H — Input array

handle array

Input array, specified as an array of object handles.

Output Arguments

B — Result of validity test

logical

Result of validity test, returned as a logical array the same size as `H` in which each element is `true` if the corresponding element in `H` is a valid handle.

Attributes

Access	public

```
Sealed                                true
```

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Test for Valid Handles

This example tests a handle array for valid members:

```
H = plot(rand(5));
delete(H(3:4))
B = isvalid(H)
```

```
B =

     1
     1
     0
     0
     1
```

See Also

See Also

handle.delete | `isgraphics`

Topics

"Test Handle Validity"

notify

Class: handle

Notify listeners that event is occurring

Syntax

```
notify(H,EventName)
notify(H,EventName,data)
```

Description

`notify(H,EventName)` notifies listeners that the named event is taking place on the handle objects in `H`.

`notify(H,EventName,data)` includes user-defined event data.

Input Arguments

`H` — Event source
handle array

Event source, specified as a handle array. All of the objects in `H` must define the named event.

`EventName` — Name of event
`char` vector

Name of event, specified as case-sensitive, quoted text that is defined by the class of `H`.

`data` — User-defined event data
subclass of `event.EventData`

User-defined event data, specified as an object that is a subclass of the event.EventData class. For information on defining event data, see “Define Event-Specific Data”.

Note: Listener callbacks should not reuse the same event data object in subsequent calls to `notify`. Always create a new event data object to pass to `notify`.

Attributes

`Access`	`public`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

handle.addlistener

Topics

"Events and Listeners Syntax"

relationaloperators

Class: handle

Determine equality or sort handle objects

Syntax

```
tf = eq(H1,H2)
tf = ne(H1,H2)
tf = lt(H1,H2)
tf = le(H1,H2)
tf = gt(H1,H2)
tf = ge(H1,H2)
```

Description

`tf = eq(H1,H2)` Equal. (`H1 == H2`)

`tf = ne(H1,H2)` Not equal. (`H1 ~= H2`)

`tf = lt(H1,H2)` Less than. (`H1 < H2`)

`tf = le(H1,H2)` Less than or equal. (`H1 <= H2`)

`tf = gt(H1,H2)` Greater than. (`H1 > H2`)

`tf = ge(H1,H2)` Greater than or equal. (`H1 >= H2`)

For each pair of input arrays (`H1` and `H2`), the operation returns a logical array of the same size. Each element in the returned array is an element-wise equality or comparison test result. These methods perform scalar expansion in the same way as the MATLAB built-in relational operators. For general information on relational operators, see "Relational Operations".

The following guidelines apply to handle comparison:

- Copies of a handle variable always compare as equal.

- The repeated comparison of any two handles always yields the same result in the same MATLAB session.
- Different handles are always not equal.
- The order of handle values is purely arbitrary and has no connection to the state of the handle objects being compared.
- If the input arrays belong to different classes (including the case where one input array belongs to a non-handle class such as `double`) then the comparison is always false.
- If you make a comparison between a handle object and an object of a dominant class, the method of the dominant class is invoked. You should generally test only like objects because a dominant class might not define one of these methods.
- An error occurs if the input arrays are not the same size and neither is scalar.

Use `isequal` when you want to determine if different handle objects have the same data in all object properties. Use `==` when you want to determine if handle variables refer to the same object.

When comparing objects that contain dynamic properties, `isequal` always returns `false`.

Input Arguments

`H1` — Left argument to operator

handle array

Left argument to operator, specified as a handle array.

`H2` — Right argument to operator

handle array

Right argument to operator, specified as a handle array.

Output Arguments

`tf` — Result of comparison

logical array

Result of comparison, returned as a logical array of the same size as the input arrays, where each element is an element-wise equality or comparison test result

- 1 — relationship is true
- 0 — relationship is not true

Attributes

Access	public

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

isequal

Topics

"Determining Equality of Objects"

hankel

Hankel matrix

Syntax

```
H = hankel(c)
H = hankel(c,r)
```

Description

`H = hankel(c)` returns the square Hankel matrix whose first column is `c` and whose elements are zero below the first anti-diagonal.

`H = hankel(c,r)` returns a Hankel matrix whose first column is `c` and whose last row is `r`. If the last element of `c` differs from the first element of `r`, the last element of `c` prevails.

Examples

Compute Hankel Matrix

Create the Hankel matrix whose first column is `c` and whose last row is `r`.

```
c = 1:3;
r = 3:6;
h = hankel(c,r)
```

```
h =

     1     2     3     4
     2     3     4     5
     3     4     5     6
```

Definitions

Hankel Matrix

A Hankel matrix is a matrix that is symmetric and constant across the anti-diagonals, and has elements `h(i,j) = p(i+j-1)`, where vector `p = [c r(2:end)]` completely determines the Hankel matrix.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`hadamard` | `kron` | `toeplitz`

Introduced before R2006a

hasnext

Determine if ValueIterator has one or more values available

Syntax

```
tf = hasnext(ValIter)
```

Description

`tf = hasnext(ValIter)` returns logical `1` (`true`) if `ValueIter` has one or more values available; otherwise, it returns logical `0` (`false`).

Examples

Get Values from ValueIterator in Reduce Function

Use the `hasnext` and `getnext` functions in a `while` loop within the reduce function to iteratively get values from the `ValueIterator` object. For example,

```
function MeanDistReduceFun(sumLenKey, sumLenIter, outKVStore)
    sumLen = [0 0];
    while hasnext(sumLenIter)
        sumLen = sumLen + getnext(sumLenIter);
    end
    add(outKVStore, 'Mean', sumLen(1)/sumLen(2));
end
```

Always call `hasnext` before `getnext` to confirm availability of a value. `mapreduce` returns an error if you call `getnext` with no remaining values in the `ValueIterator` object.

Input Arguments

`ValIter` — Intermediate value iterator
`ValueIterator` object

Intermediate value iterator, specified as a `ValueIterator` object. The `mapreduce` function automatically creates this object during execution. The second input to the reduce function specifies the variable name for the `ValueIterator` object, which is the variable name to use with the `hasnext` and `getnext` functions.

For more information, see ValueIterator.

See Also

See Also

`getnext` | `mapreduce`

Topics

ValueIterator
"Build Effective Algorithms with MapReduce"

Introduced in R2014b

hdf5info

Information about HDF5 file

Note: `hdf5info` will be removed in a future version. Use `h5info` instead.

Syntax

```
fileinfo = hdf5info(filename)
fileinfo = hdf5info(...,'ReadAttributes',BOOL)
[...] = hdf5info(..., 'V71Dimensions', BOOL)
```

Description

`fileinfo = hdf5info(filename)` returns a structure `fileinfo` whose fields contain information about the contents of the HDF5 file `filename`. `filename` is a character vector that specifies the name of the HDF5 file.

`fileinfo = hdf5info(...,'ReadAttributes',BOOL)` specifies whether `hdf5info` returns the values of the attributes or just information describing the attributes. By default, `hdf5info` reads in attribute values (`BOOL` = `true`).

`[...] = hdf5info(..., 'V71Dimensions', BOOL)` specifies whether to report the dimensions of data sets and attributes as they were returned in previous versions of `hdf5info` (MATLAB 7.1 [R14SP3] and earlier). If `BOOL` is true, `hdf5info` swaps the first two dimensions of the data set. This behavior was intended to account for the difference in how HDF5 and MATLAB express array dimensions. HDF5 describes data set dimensions in row-major order; MATLAB stores data in column-major order. However, swapping these dimensions may not correctly reflect the intent of the data in the file and may invalidate metadata. When `BOOL` is false (the default), `hdf5info` returns data dimensions that correctly reflect the data ordering as it is written in the file —each dimension in the output variable matches the same dimension in the file.

Note If you use the `'V71Dimensions'` parameter and intend on passing the `fileinfo` structure returned to the `hdf5read` function, you should also specify the

'V71Dimensions' parameters with hdf5read. If you do not, hdf5read uses the new behavior when reading the data set and certain metadata returned by hdf5info does not match the actual data returned by hdf5read.

Examples

```
fileinfo = hdf5info('example.h5');
```

To get more information about the contents of the HDF5 file, look at the GroupHierarchy field in the fileinfo structure returned by hdf5info.

```
toplevel = fileinfo.GroupHierarchy
```

```
toplevel =

      Filename: [1x64 char]
          Name: '/'
        Groups: [1x2 struct]
      Datasets: []
     Datatypes: []
         Links: []
    Attributes: [1x2 struct]
```

To probe further into the file hierarchy, keep examining the Groups field.

See also

hdf5read, hdf5write

hdf5read

Read HDF5 file

Note: `hdf5read` will be removed in a future version. Use `h5read` instead.

Syntax

```
data = hdf5read(filename,datasetname)
attr = hdf5read(filename,attributename)
[data, attr] = hdf5read(...,'ReadAttributes',BOOL)
data = hdf5read(hinfo)
[...] = hdf5read(..., 'V71Dimensions', BOOL)
```

Description

`data = hdf5read(filename,datasetname)` reads all the data in the data set `datasetname` that is stored in the HDF5 file `filename` and returns it in the variable `data`. To determine the names of data sets in an HDF5 file, use the `hdf5info` function.

The return value, `data`, is a multidimensional array. `hdf5read` maps HDF5 data types to native MATLAB data types, whenever possible. If it cannot represent the data using MATLAB data types, `hdf5read` uses one of the HDF5 data type objects. For example, if an HDF5 file contains a data set made up of an enumerated data type, `hdf5read` uses the `hdf5.h5enum` object to represent the data in the MATLAB workspace. The `hdf5.h5enum` object has data members that store the enumerations (names), their corresponding values, and the enumerated data.

Note: `hdf5read` performs best when reading numeric datasets. If you need to read string, compound, or variable length datasets, MathWorks strongly recommends that you use the low-level HDF5 interface function, `H5D.read`. To read a subset of a dataset, you must use the low-level interface.

`attr = hdf5read(filename,attributename)` reads all the metadata in the attribute `attributename`, stored in the HDF5 file `filename`, and returns it in the variable `attr`. To determine the names of attributes in an HDF5 file, use the `hdf5info` function.

`[data, attr] = hdf5read(...,'ReadAttributes',BOOL)` reads all the data, as well as all of the associated attribute information contained within that data set. By default, `BOOL` is false.

`data = hdf5read(hinfo)` reads all of the data in the data set specified in the structure `hinfo` and returns it in the variable `data`. The `hinfo` structure is extracted from the output returned by `hdf5info`, which specifies an HDF5 file and a specific data set.

`[...] = hdf5read(..., 'V71Dimensions', BOOL)` specifies whether to change the majority of data sets read from the file. If `BOOL` is true, `hdf5read` permutes the first two dimensions of the data set, as it did in previous releases (MATLAB 7.1 [R14SP3] and earlier). This behavior was intended to account for the difference in how HDF5 and MATLAB express array dimensions. HDF5 describes data set dimensions in row-major order; MATLAB stores data in column-major order. However, permuting these dimensions may not correctly reflect the intent of the data and may invalidate metadata. When `BOOL` is false (the default), the data dimensions correctly reflect the data ordering as it is written in the file — each dimension in the output variable matches the same dimension in the file.

Examples

Use `hdf5info` to get information about an HDF5 file and then use `hdf5read` to read a data set, using the information structure (`hinfo`) returned by `hdf5info` to specify the data set.

```
hinfo = hdf5info('example.h5');
dset = hdf5read(hinfo.GroupHierarchy.Groups(2).Datasets(1));
```

See Also

`hdf5info` | `hdf5write`

Introduced before R2006a

hdf5write

Write data to file in HDF5 format

Note: `hdf5write` will be removed in a future version. Use `h5write` instead.

Syntax

```
hdf5write(filename,location,dataset)
hdf5write(filename,details,dataset)
hdf5write(filename,details,attribute)
hdf5write(filename, details1, dataset1, details2, dataset2,...)
hdf5write(filename,...,'WriteMode',mode,...)
hdf5write(..., 'V71Dimensions', BOOL)
```

Description

`hdf5write(filename,location,dataset)` writes the data `dataset` to the HDF5 file, `filename`. If `filename` does not exist, `hdf5write` creates it. If `filename` exists, `hdf5write` overwrites the existing file, by default, but you can also append data to an existing file using an optional syntax.

`location` defines where to write the data set in the file. HDF5 files are organized in a hierarchical structure similar to a UNIX directory structure. `location` is specified as a character vector that resembles a UNIX path.

`hdf5write` maps the data in `dataset` to HDF5 data types according to rules outlined below.

`hdf5write(filename,details,dataset)` writes `dataset` to `filename` using the values in the `details` structure. For a data set, the `details` structure can contain the following fields.

Field Name	Description	Data Type
`Location`	Location of the data set in the file	Character array

Field Name	Description	Data Type
`Name`	Name to attach to the data set	Character array

`hdf5write(filename,details,attribute)` writes the metadata `attribute` to `filename` using the values in the `details` structure. For an attribute, the `details` structure can contain following fields.

Field Name	Description	Data Type
`AttachedTo`	Location of the object this attribute modifies	Structure array
`AttachType`	Identifies what kind of object this attribute modifies; possible values are `'group'` and `'dataset'`	Character array
`Name`	Name to attach to the data set	Character array

`hdf5write(filename, details1, dataset1, details2, dataset2,...)` writes multiple data sets and associated attributes to `filename` in one operation. Each data set and attribute must have an associated `details` structure.

`hdf5write(filename,...,'WriteMode',mode,...)` specifies whether `hdf5write` overwrites the existing file (the default) or appends data sets and attributes to the file. Possible values for mode are `'overwrite'` and `'append'`.

`hdf5write(..., 'V71Dimensions', BOOL)` specifies whether to change the majority of data sets written to the file. If `BOOL` is true, `hdf5write` permutes the first two dimensions of the data set, as it did in previous releases (MATLAB 7.1 [R14SP3] and earlier). This behavior was intended to account for the difference in how HDF5 and MATLAB express array dimensions. HDF5 describes data set dimensions in row-major order; MATLAB stores data in column-major order. However, permuting these dimensions may not correctly reflect the intent of the data and may invalidate metadata. When `BOOL` is false (the default), the data written to the file correctly reflects the data ordering of the data sets — each dimension in the file's data sets matches the same dimension in the corresponding MATLAB variable.

Data Type Mappings

The following table lists how `hdf5write` maps the data type from the workspace into an HDF5 file. If the data in the workspace that is being written to the file is a MATLAB

data type, `hdf5write` uses the following rules when translating MATLAB data into HDF5 data objects.

MATLAB Data Type	HDF5 Data Set or Attribute
Numeric	Corresponding HDF5 native data type. For example, if the workspace data type is `uint8`, the `hdf5write` function writes the data to the file as 8-bit integers. The size of the HDF5 dataspace is the same size as the MATLAB array.
Character vector	Single, null-terminated string
Cell array of character vectors	Multiple, null-terminated strings, each the same length. Length is determined by the length of the longest string in the cell array. The size of the HDF5 dataspace is the same size as the cell array.
Cell array of numeric data	Numeric array, the same dimensions as the cell array. The elements of the array must all have the same size and type. The data type is determined by the first element in the cell array.
Structure array	HDF5 compound type. Individual fields in the structure employ the same data translation rules for individual data types. For example, a cell array of strings becomes a multiple, null-terminated strings.
HDF5 objects	If the data being written to the file is composed of HDF5 objects, `hdf5write` uses the same data type when writing to the file. For all HDF5 objects, except `HDF5.h5enum` objects, the dataspace has the same dimensions as the array of HDF5 objects passed to the function. For `HDF5.h5enum` objects, the size and dimensions of the data set in the HDF5 file is the same as the object's Data field.

Examples

Write a 5-by-5 data set of `uint8` values to the root group.

```
hdf5write('myfile.h5', '/dataset1', uint8(magic(5)))
```

Write a 2-by-2 data set of text entries into a subgroup.

```
dataset = {'north', 'south'; 'east', 'west'};
hdf5write('myfile2.h5', '/group1/dataset1.1', dataset);
```

Write a data set and attribute to an existing group.

```
dset = single(rand(10,10));
dset_details.Location = '/group1/dataset1.2';
dset_details.Name = 'Random';

attr = 'Some random data';
attr_details.Name = 'Description';
attr_details.AttachedTo = '/group1/dataset1.2/Random';
attr_details.AttachType = 'dataset';

hdf5write('myfile2.h5', dset_details, dset, ...
           attr_details, attr, 'WriteMode', 'append');
```

Write a data set using objects.

```
dset = hdf5.h5array(magic(5));
hdf5write('myfile3.h5', '/g1/objects', dset);
```

See Also

`hdf5read` | `hdf5info`

Introduced before R2006a

hdfan

Gateway to HDF multifile annotation (AN) interface

Syntax

```
[out1,...,outN] = hdfan(funcstr,input1,...,inputN)
```

Description

`hdfan` is the MATLAB gateway to the HDF multifile annotation (AN) interface.

`[out1,...,outN] = hdfan(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the AN function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between AN functions in the HDF library and valid values for `funcstr`. For example, `hdfan('endaccess',annot_id)` corresponds to the C library call `ANendaccess(annot_id)`.

Access Functions

Access functions initialize the interface and provide and terminate access to annotations.

Value of `funcstr`	Function Syntax	Description
`'start'`	`AN_id = hdfan('start',file_id)`	Initializes the multifile annotation interface.
`'select'`	`annot_id = hdfan('select',AN_id, index,annot_type)`	Selects and returns the identifier for the annotation identified by the given index value and annotation type.
`'end'`	`status = hdfan('end',AN_id)`	Terminates access to the multifile annotation interface.
`'create'`	`annot_id = hdfan('create',AN_id,tag,r`	Creates a data annotation for the object identified by the specified tag and reference number. `annot_type` can be `'data_label'` or `'data_desc'`.

Value of `funcstr`	Function Syntax	Description
`'createf'`	`annot_id = hdfan('createf',AN_id,anno`	Creates a file label or file description annotation. `annot_type` can be `'file_label'` or `'file_desc'`.
`'endaccess'`	`status = hdfan('endaccess',annot_id`	Terminates access to an annotation.

Read/Write Functions

Read/write functions read and write file or object annotations.

Value of `funcstr`	Function Syntax	Description
`'writeann'`	`status = hdfan('writeann',annot_id,`	Writes the annotation corresponding to the given annotation identifier.
`'readann'`	`[annot_string,status] = hdfan('readann',annot_id)`	Reads the annotation corresponding to the given annotation identifier;
	`[annot_string,status] = hdfan('readann',annot_id,m`	Reads the annotation corresponding to the given annotation identifier. `annot_string` will not be longer than `max_str_length`.

General Inquiry Functions

General inquiry functions return information about the annotations in a file.

Value of `funcstr`	Function Syntax	Description
`'numann'`	`num_annot = hdfan('numann',AN_id,annot`	Gets number of annotations of specified type corresponding to given tag/ref pair.
`'annlist'`	`[ann_list,status] = hdfan('annlist',AN_id,anno`	Gets the list of annotations of given type in the file corresponding to a given tag/ref pair.

Value of `funcstr`	Function Syntax	Description
`'annlen'`	`length = hdfan('annlen',annot_id)`	Gets the length of annotation corresponding to the given annotation identifier.
`'fileinfo'`	`[nfl,nfd,ndl,ndd,status] = hdfan('fileinfo',AN_id)`	Gets number of file label, file description, data label, and data description annotations in the file corresponding to `AN_id`.
`'get_tagref'`	`[tag,ref,status] = hdfan('get_tagref',AN_id,i`	Gets the tag/ref pair for the specified annotation type and index.
`'id2tagref'`	`[tag,ref,status] = hdfan('id2tagref',annot_id`	Gets the tag/ref pair corresponding to the specified annotation identifier.
`'tagref2id'`	`annot_id = hdfan('tagref2id',AN_id,ta`	Gets the annotation identifier corresponding to the specified tag/ref pair.
`'atype2tag'`	`tag = hdfan('atype2tag',annot_ty`	Gets the tag corresponding to the specified annotation type.
`'tag2atype'`	`annot_type = hdfan('tag2atype',tag)`	Gets the annotation type corresponding to the specified tag.

Input/Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

In general, the input argument `annot_type` can be one of these values:

- `'file_label'`
- `'file_desc'`
- `'data_label'`
- `'data_desc'`

`AN_id` refers to the multifile annotation interface identifier.

`annot_id` refers to an individual annotation identifier.

You must terminate access to all opened identifiers using either `hdfan('end',AN_id)` or `hdfan('endaccess',annot_id)`. Otherwise, the HDF library might not properly write all data to the file.

See Also

See Also

`hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfhx` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

hdfdf24

Gateway to HDF 24-bit raster image (DF24) interface

Syntax

```
[out1,...,outN] = hdfdf24(funcstr,input1,...,inputN)
```

Description

`hdfdf24` is the MATLAB gateway to the HDF 24-bit raster image interface.

`[out1,...,outN] = hdfdf24(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the DF24 function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between DF24 functions in the HDF library and valid values for `funcstr`. For example, `hdfdf24('lastref')` corresponds to the C library call `DF24lastref()`.

Write Functions

Write functions create raster image sets and store them in new files or append them to existing files.

Value of `funcstr`	Function Syntax	Description
`'addimage'`	`status = hdfdf24('addimage',filenam`	Appends a 24-bit raster image to a file.
`'putimage'`	`status = hdfdf24('putimage',filenam`	Writes a 24-bit raster image to file by overwriting all existing data.
`'setcompress'`	`status = hdfdf24('setcompress',comp`	Sets the compress method for the next raster image written to the file. `compress_type` can be `'none'`, `'rle'`, `'jpeg'`, or `'imcomp'`. If

Value of `funcstr`	Function Syntax	Description
		`compress_type` is `'jpeg'`, then two additional parameters must be specified: `quality` (a scalar between 0 and 100) and `force_baseline` (either 0 or 1). Other compression types do not have additional parameters.
`'setdims'`	`status = hdfdf24('setdims',width,he`	Sets the dimensions for the next raster image written to the file.
`'setil'`	`status = hdfdf24('setil',interlace)`	Sets the interlace format of the next raster image written to the file. `interlace` can be `'pixel'`, `'line'`, or `'component'`.
`'lastref'`	`ref = hdfdf24('lastref')`	Reports the last reference number assigned to a 24-bit raster image.

Read Functions

Read functions determine the dimensions and interlace format of an image set, read the actual image data, and provide sequential or random read access to any raster image set.

Value of `funcstr`	Function Syntax	Description
`'getdims'`	`[width,height,interlace,st = hdfdf24('getdims',filename`	Retrieves the dimensions before reading the next raster image. `interlace` can be `'pixel'`, `'line'`, or `'component'`.
`'getimage'`	`[RGB,status] = hdfdf24('getimage',filenam`	Reads the next 24-bit raster image.
`'reqil'`	`status = hdfdf24('reqil',interlace)`	Specifies the interlace format before reading the next raster image. `interlace` can be `'pixel'`, `'line'`, or `'component'`.

Value of `funcstr`	Function Syntax	Description
`'readref'`	`status = hdfdf24('readref',filename`	Reads 24-bit raster image with the specified raster number.
`'restart'`	`status = hdfdf24('restart')`	Returns to the first 24-bit raster image in the file.
`'nimages'`	`num_images = hdfdf24('nimages',filename`	Reports the number of 24-bit raster images in a file.

Input/Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

HDF uses C-style ordering of elements, in which elements along the last dimension vary fastest. MATLAB uses FORTRAN-style ordering, in which elements along the first dimension vary fastest. `hdfdf24` does not automatically convert from C-style ordering to MATLAB style ordering, which means that MATLAB image arrays need to be permuted when using `hdfdf24` to read or write from HDF files. The exact permutation depends on the interlace format specified by, for example, `hdfdf24('setil',...)`. The following calls to `permute` converts HDF arrays to MATLAB arrays, according to the specified interlace format.

`RGB = permute(RGB,[3 2 1]);`	`'pixel'` interlace
`RGB = permute(RGB,[3 1 2]);`	`'line'` interlace
`RGB = permute(RGB,[2 1 3]);`	`'component'` interlace

See Also

See Also

`hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfhx` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

hdfdfr8

Gateway to HDF 8-bit raster image (DFR8) interface

Syntax

```
[out1,...,outN] = hdfdfr8(funcstr,input1,...,inputN)
```

Description

`hdfdfr8` is the MATLAB gateway to the HDF 8-bit raster image (DFR8) interface.

`[out1,...,outN] = hdfdfr8(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the DFR8 function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between DFR8 functions in the HDF library and valid values for `funcstr`. For example, `hdfdfr8('setpalette',map)` corresponds to the C library call `DFR8setpalette(map)`.

Write Functions

Write functions create raster image sets and store them in new files or append them to existing files.

Value of `funcstr`	Function Syntax	Description
`'writeref'`	`status = hdfdfr8('writeref',filenam`	Stores the raster image using the specified reference number.
`'setpalette'`	`status = hdfdfr8('setpalette',color`	Sets palette for multiple 8-bit raster images.
`'addimage'`	`status = hdfdfr8('addimage',filenam`	Appends an 8-bit raster image to a file. `compress` can be `'none'`, `'rle'`, `'jpeg'`, or `'imcomp'`.
`'putimage'`	`status = hdfdfr8('putimage',filenam`	Writes an 8-bit raster image to an existing file or creates the file. `compress` can be `'none'`, `'rle'`, `'jpeg'`, or `'imcomp'`.

Value of `funcstr`	Function Syntax	Description
`'setcompress'`	`status = hdfdfr8('setcompress',comp`	Sets the compression type. `compress_type` can be `'none'`, `'rle'`, `'jpeg'`, or `'imcomp'`. If `compress_type` is `'jpeg'`, then two additional parameters must be passed in: `quality` (a scalar between 0 and 100) and `force_baseline` (either 0 or 1). Other compression types do not have additional parameters.

Read Functions

Read functions determine the dimension and palette assignment for an image set, read the actual image data, and provide sequential or random read access to any raster image set.

Value of `funcstr`	Function Syntax	Description
`'getdims'`	`[width,height,hasmap,statu = hdfdfr8('getdims',filename`	Retrieves dimensions for an 8-bit raster image.
`'getimage'`	`[X,map,status] = hdfdfr8('getimage',filenam`	Retrieves an 8-bit raster image and its palette.
`'readref'`	`status = hdfdfr8('readref',filename`	Gets the next raster image with the specified reference number.
`'restart'`	`status = hdfdfr8('restart')`	Ignores information about last file accessed and restarts from beginning.
`'nimages'`	`num_images = hdfdfr8('nimages',filename`	Returns number of raster images in a file.
`'lastref'`	`ref = hdfdfr8('lastref')`	Returns reference number of last element accessed.

Input/Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

HDF uses C-style ordering of elements, in which elements along the last dimension vary fastest.MATLAB uses FORTRAN-style ordering, in which elements along the first dimension vary fastest. `hdfdfr8` does not automatically convert from C-style ordering to MATLAB style ordering, which means that MATLAB image and colormap matrices must be transposed when using `hdfdfr8` to read or write from HDF files.

Functions in `hdfdfr8` that read and write palette information expect to use `uint8` data in the range [0,255], while MATLAB colormaps contain double-precision values in the range [0,1]. Therefore, HDF palettes must be converted to `double` and scaled to be used as MATLAB colormaps.

See Also

See Also

`hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfhx` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

hdfh

Gateway to HDF H interface

Syntax

```
[out1,...,outN] = hdfh(funcstr,input1,...,inputN)
```

Description

`hdfh` is the MATLAB gateway to the HDF H interface.

`[out1,...,outN] = hdfh(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the H function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between H functions in the HDF library and valid values for `funcstr`. For example, `hdfh('close',file_id)` corresponds to the C library call `Hclose(file_id)`.

Functions

Value of `funcstr`	Function Syntax	Description
`'appendable'`	`status = hdfh('appendable',access_id)`	Specifies that the element can be appended to.
`'close'`	`status = hdfh('close',file_id)`	Closes the access path to the file.
`'deldd'`	`status = hdfh('deldd',file_id,tag,ref)`	Deletes a tag and reference number from the data descriptor list.
`'dupdd'`	`status = hdfh('dupdd',file_id,tag,ref,`	
`'endaccess'`	`status = hdfh('endaccess',access_id)`	Terminates access to a data object by disposing of the access identifier.
`'fidinquire'`	`[filename,access_mode,attach, = hdfh('fidinquire',file_id)`	Returns information about specified file.

Value of `funcstr`	Function Syntax	Description
`'find'`	`[tag,ref,offset,length,status = hdfh('find',file_id,... search_tag,search_ref,search_`	Locates the next object to be searched for in an HDF file. `search_type` can be `'new'` or `'continue'`. The `dir` input can be `'forward'` or `'backward'`.
`'getelement'`	`[data,status] = hdfh('getelement',file_id,tag`	Reads the data element for the specified tag and reference number.
`'getfileversio`	`[major,minor,release,info,sta = hdfh('getfileversion',file_id`	Returns version information for an HDF file.
`'getlibversion`	`[major,minor,release,info,sta = hdfh('getlibversion')`	Returns version information for the current HDF library.
`'inquire'`	`[file_id,tag,ref,length,offse special,status] = hdfh('inquire',access_id)`	Returns access information about a data element.
`'ishdf'`	`tf = hdfh('ishdf',filename)`	Determines if a file is an HDF file.
`'length'`	`length = hdfh('length',file_id,tag,ref`	Returns the length of a data object specified by the tag and reference number.
`'newref'`	`ref = hdfh('newref',file_id)`	Returns a reference number that can be used with any tag to product a unique tag/reference number pair.
`'nextread'`	`status = hdfh('nextread',access_id,tag`	Searches for the next data descriptor that matches the specified tag and reference number. `origin` can be `'start'` or `'current'`.
`'number'`	`num = hdfh('number',file_id,tag)`	Returns the number of instances of a tag in a file.

Value of `funcstr`	Function Syntax	Description
`'offset'`	`offset = hdfh('offset',file_id,tag,ref`	Returns the offset of a data element in the file.
`'open'`	`file_id = hdfh('open',filename,access,r`	Provides an access path to an HDF file by reading all the data descriptor blocks into memory.
`'putelement'`	`count = hdfh('putelement',file_id,tag`	Writes a data element or replaces an existing data element in an HDF file. `X` must be a `uint8` array.
`'read'`	`X = hdfh('read',access_id,length)`	Reads the next segment in a data element.
`'seek'`	`status = hdfh('seek',access_id,offset,`	Sets the access pointer to an offset within a data element. `origin` can be `'start'` or `'current'`.
`'startread'`	`access_id = hdfh('startread',file_id,tag,`	
`'startwrite'`	`access_id = hdfh('startwrite',file_id,tag`	
`'sync'`	`status = hdfh('sync',file_id)`	
`'trunc'`	`length = hdfh('trunc',access_id,trunc_`	Truncates the specified data object to the given length.
`'write'`	`count = hdfh('write',access_id,X)`	Writes the next data segment to a specified data element. `X` must be a `uint8` array.

Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

Limitations

- `hdfh` does not support these functions in the NCSA H interface:
  - `Hcache`
  - `Hendbitaccess`
  - `Hexist`
  - `Hflushdd`
  - `Hgetbit`
  - `Hputbit`
  - `Hsetlength`
  - `Hshutdown`
  - `Htagnewref`

See Also

See Also

`hdfan` | `hdfdf24` | `hdfdfr8` | `hdfhd` | `hdfhe` | `hdfhx` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

hdfhd

Gateway to HDF HD interface

Syntax

```
[out1,...,outN] = hdfhd(funcstr,input1,...,inputN)
```

Description

`hdfhd` is the MATLAB gateway to the HDF HD interface.

`[out1,...,outN] = hdfhd(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the HD function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between HD functions in the HDF library and valid values for `funcstr`.

Functions

Value of `funcstr`	Function Syntax	Description
`'gettagsname'`	`tag_name = hdfhd('gettagsname',tag)`	Gets the name of the specified tag.

Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

See Also

See Also

`hdfan` | `hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

hdfhe

Gateway to HDF HE interface

Syntax

```
[out1,...,outN] = hdfhe(funcstr,input1,...,inputN)
```

Description

`hdfhe` is the MATLAB gateway to the HDF HE interface.

This is a stub page.

`[out1,...,outN] = hdfhe(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the HE function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between HE functions in the HDF library and valid values for `funcstr`.

Functions

Value of `funcstr`	Function Syntax	Description
`'clear'`	`hdfhe('clear')`	Clears all information on reported errors from the error stack.
`'print'`	`hdfhe('print',level)`	Prints information in error stack. If `level` is 0, then the entire error stack is printed.
`'string'`	`error_text = hdfhe('string',error_c`	Returns the error message associated with the specified error code.
`'value'`	`error_code = hdfhe('value',stack_of`	Returns an error code from the specified level of the error stack. A

Value of `funcstr`	Function Syntax	Description
		`stack_offset` value of 1 gets the most recent error code.

Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

Limitations

- `hdfhe` does not support these functions:
  - `HEpush`
  - `HEreport`

See Also

See Also

`hdfan` | `hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

hdfhx

Gateway to HDF external data (HX) interface

Syntax

```
[out1,...,outN] = hdfhx(funcstr,input1,...,inputN)
```

Description

`hdfhx` is the MATLAB gateway to the HDF interface for manipulating linked and external data elements.

`[out1,...,outN] = hdfhx(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the HX function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between HX functions in the HDF library and valid values for `funcstr`. For example, `hdfhx('setdir',pathname);` corresponds to the C library call `HXsetdir(pathname)`.

Functions

Value of `funcstr`	Function Syntax	Description
`'create'`	`access_id = hdfhx('create',file_id,ta`	Creates a new external file special data element. `ength)`
`'setcreatedir'`	`status = hdfhx('setcreatedir',path`	Sets the directory location for writing external file.
`'setdir'`	`status = hdfhx('setdir',pathname);`	Sets the directory for locating external files. `pathname` can contain multiple directories separated by vertical bars.

Input/Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

In cases where the HDF C library accepts `NULL` for certain inputs, an empty matrix (`[ ]` or `' '`) can be used.

See Also

See Also

`hdfan` | `hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

hdfinfo

Information about HDF4 or HDF-EOS file

Syntax

```
S = hdfinfo(filename)
S = hdfinfo(filename,mode)
```

Description

`S = hdfinfo(filename)` returns a structure `S` whose fields contain information about the contents of an HDF4 or HDF-EOS file. Specify `filename` as a character vector containing the name of the HDF4 file.

`S = hdfinfo(filename,mode)` reads the file as an HDF4 file, if `mode` is `'hdf'`, or as an HDF-EOS file, if `mode` is `'eos'`. If `mode` is `'eos'`, only HDF-EOS data objects are queried. To retrieve information on the entire contents of a file containing both HDF4 and HDF-EOS objects, `mode` must be `'hdf'`.

Note `hdfinfo` can be used on Version 4.x HDF files or Version 2.x HDF-EOS files. To get information about an HDF5 file, use `hdf5info`.

The set of fields in the returned structure `S` depends on the individual file. Fields that can be present in the `S` structure are shown in the following table.

Mode	Field Name	Description	Return Type
HDF	`Attributes`	Attributes of the data set	Structure array
	`Description`	Annotation description	Cell array
	`Filename`	Name of the file	Character vector
	`Label`	Annotation label	Cell array
	`Raster8`	Description of 8-bit raster images	Structure array

Mode	Field Name	Description	Return Type
	`Raster24`	Description of 24-bit raster images	Structure array
	`SDS`	Description of scientific data sets	Structure array
	`Vdata`	Description of Vdata sets	Structure array
	`Vgroup`	Description of Vgroups	Structure array
`EOS`	`Filename`	Name of the file	Character vector
	`Grid`	Grid data	Structure array
	`Point`	Point data	Structure array
	`Swath`	Swath data	Structure array

Those fields in the table above that contain structure arrays are further described in the tables shown below.

Fields Common to Returned Structure Arrays

Structure arrays returned by `hdfinfo` contain some common fields. These are shown in the table below. Not all structure arrays will contain all of these fields.

Field Name	Description	Data Type
`Attributes`	Data set attributes. Contains fields `Name` and `Value`.	Structure array
`Description`	Annotation description	Cell array
`Filename`	Name of the file	Character vector
`Label`	Annotation label	Cell array
`Name`	Name of the data set	Character vector
`Rank`	Number of dimensions of the data set	Double
`Ref`	Data set reference number	Double
`Type`	Type of HDF or HDF-EOS object	Character vector

Fields Specific to Certain Structures

Structure arrays returned by `hdfinfo` also contain fields that are unique to each structure. These are shown in the tables below.

Fields of the Attribute Structure

Field Name	Description	Data Type
`Name`	Attribute name	Character vector
`Value`	Attribute value or description	Numeric or Text

Fields of the Raster8 and Raster24 Structures

Field Name	Description	Data Type
`HasPalette`	`1` (`true`) if the image has an associated palette, otherwise `0` (`false`) (8-bit only)	Logical
`Height`	Height of the image, in pixels	Number
`Interlace`	Interlace mode of the image (24-bit only)	Character vector
`Name`	Name of the image	Character vector
`Width`	Width of the image, in pixels	Number

Fields of the SDS Structure

Field Name	Description	Data Type
`DataType`	Data precision	Character vector
`Dims`	Dimensions of the data set. Contains fields `Name`, `DataType`, `Size`, `Scale`, and `Attributes`. `Scale` is an array of numbers to place along the dimension and demarcate intervals in the data set.	Structure array
`Index`	Index of the SDS	Number

Fields of the Vdata Structure

Field Name	Description	Data Type
`DataAttributes`	Attributes of the entire data set. Contains fields `Name` and `Value`.	Structure array
`Class`	Class name of the data set	Character vector

Field Name	Description	Data Type
`Fields`	Fields of the Vdata. Contains fields `Name` and `Attributes`.	Structure array
`NumRecords`	Number of data set records	Double
`IsAttribute`	`1` (`true`) if Vdata is an attribute, otherwise `0` (`false`)	Logical

Fields of the Vgroup Structure

Field Name	Description	Data Type
`Class`	Class name of the data set	Character vector
`Raster8`	Description of the 8-bit raster image	Structure array
`Raster24`	Description of the 24-bit raster image	Structure array
`SDS`	Description of the Scientific Data sets	Structure array
`Tag`	Tag of this Vgroup	Number
`Vdata`	Description of the Vdata sets	Structure array
`Vgroup`	Description of the Vgroups	Structure array

Fields of the Grid Structure

Field Name	Description	Data Type
`Columns`	Number of columns in the grid	Number
`DataFields`	Description of the data fields in each `Grid` field of the grid. Contains fields `Name`, `Rank`, `Dims`, `NumberType`, `FillValue`, and `TileDims`.	Structure array
`LowerRight`	Lower right corner location, in meters	Number
`Origin Code`	Origin code for the grid	Number
`PixRegCode`	Pixel registration code	Number
`Projection`	Projection code, zone code, sphere code, and projection parameters of	Structure

Field Name	Description	Data Type
	the grid. Contains fields `ProjCode`, `ZoneCode`, `SphereCode`, and `ProjParam`.	
`Rows`	Number of rows in the grid	Number
`UpperLeft`	Upper left corner location, in meters	Number

Fields of the Point Structure

Field Name	Description	Data Type
`Level`	Description of each level of the point. Contains fields `Name`, `NumRecords`, `FieldNames`, `DataType`, and `Index`.	Structure

Fields of the Swath Structure

Field Name	Description	Data Type
`DataFields`	Data fields in the swath. Contains fields `Name`, `Rank`, `Dims`, `NumberType`, and `FillValue`.	Structure array
`GeolocationField`	Geolocation fields in the swath. Contains fields `Name`, `Rank`, `Dims`, `NumberType`, and `FillValue`.	Structure array
`IdxMapInfo`	Relationship between indexed elements of the geolocation mapping. Contains fields `Map` and `Size`.	Structure
`MapInfo`	Relationship between data and geolocation fields. Contains fields `Map`, `Offset`, and `Increment`.	Structure

Examples

To retrieve information about the file `example.hdf`,

```
fileinfo = hdfinfo('example.hdf')
```

```
fileinfo =
    Filename: 'example.hdf'
         SDS: [1x1 struct]
       Vdata: [1x1 struct]
```

And to retrieve information from this about the scientific data set in `example.hdf`,

```
sds_info = fileinfo.SDS

sds_info =
       Filename: 'example.hdf'
           Type: 'Scientific Data Set'
           Name: 'Example SDS'
           Rank: 2
       DataType: 'int16'
     Attributes: []
           Dims: [2x1 struct]
          Label: {}
    Description: {}
          Index: 0
```

See Also

`hdfread`

Introduced before R2006a

hdfml

Utilities for working with MATLAB HDF gateway functions

Syntax

```
hdfml('closeall')
hdfml('listinfo')
tag = hdfml('tagnum',tagname)
nbytes = hdfml('sizeof',data_type)
hdfml('defaultchartype',char_type)
```

Description

`hdfml('closeall')` closes all open registered HDF file and data object identifiers.

`hdfml('listinfo')` prints information about all open registered HDF file and data object identifiers.

`tag = hdfml('tagnum',tagname)` returns the tag number corresponding to the tag name specified by `tagname`.

`nbytes = hdfml('sizeof',data_type)` returns size in bytes of specified data type.

`hdfml('defaultchartype',char_type)` defines the HDF data type for text data in MATLAB. Valid values for `char_type` are `'char8'` or `'uchar8'`. The change persists until the MATLAB HDF gateway function is cleared from memory. Text data in MATLAB are mapped to `char8` by default.

The MATLAB HDF gateway functions maintain lists of certain HDF file and data object identifiers so that, for example, HDF objects and files can be properly closed when a user issues the command:

```
clear mex
```

These lists are updated whenever these identifiers are created or closed.

See Also

See Also

`hdfan` | `hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

hdfpt

Interface to HDF-EOS Point object

Syntax

```
[out1,...,outN] = hdfpt(funcstr,input1,...,inputN)
```

Description

`hdfpt` is the MATLAB gateway to the Point functions in the HDF-EOS C library, which is developed and maintained by EOSDIS (Earth Observing System Data and Information System). A Point data set comprises a series of data records taken at (possibly) irregular time intervals and at scattered geographic locations. Each data record consists of a set of one or more data values representing the state of a point in time and/or space.

`[out1,...,outN] = hdfpt(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the Point function in the HDF-EOS library specified by `functstr`.

There is a one-to-one correspondence between PT functions in the HDF-EOS C library and valid values for `funcstr`. For example, `hdfpt('detach',point_id)` corresponds to the C library call `PTdetach(point_id)`.

Programming Model

The programming model for accessing a point data set through `hdfpt` is as follows:

1. Open the file and initialize the PT interface by obtaining a file id from a file name.
2. Open or create a point data set by obtaining a point id from a point name.
3. Perform desired operations on the data set.
4. Close the point data set by disposing of the point id.
5. Terminate point access to the file by disposing of the file id.

To access a single point data set that already exists in an HDF-EOS file, use the following MATLAB commands:

```
fileid = hdfpt('open',filename,access);
pointid = hdfpt('attach',fileid,pointname);

% Optional operations on the data set...

status = hdfpt('detach',pointid);
status = hdfpt('close',fileid);
```

To access several files at the same time, obtain a separate file identifier for each file to be opened. To access more than one point data set, obtain a separate point id for each data set.

It is important to properly dispose of point id's and file id's so that buffered operations are written completely to disk. If you quit MATLAB or clear all MEX-files with PT identifiers still open, MATLAB issues a warning and automatically disposes of them.

Note that file identifiers returned by `hdfpt` are not interchangeable with file identifiers returned by any other HDF-EOS or HDF function.

Access Routines

Access routines initialize and terminate access to the PT interface and point data sets (including opening and closing files).

Value of `funcstr`	Function Syntax	Description
`'open'`	`file_id = hdfpt('open',filename,acce`	Given the filename and desired access mode, opens or creates an HDF file in order to create, read, or write a point. `access` can be `'read'`, `'readwrite'`, or `'create'`. `file_id` is -1 if the operation fails.
`'create'`	`point_id = hdfpt('create',file_id,poi`	Creates a point data set with the specified name. `pointname` is a character vector containing the name of the point data set. `point_id` is -1 if the operation fails.
`'attach'`	`point_id = hdfpt('attach',file_id,poi`	Attaches to an existing point data set within the file.

Value of `funcstr`	Function Syntax	Description
		`point_id` is -1 if the operation fails.
`'detach'`	`status = hdfpt('detach',point_id)`	Detaches from point data set.
`'close'`	`status = hdfpt('close',file_id)`	Closes file.

Definition Routines

Definition routines allow the user to set key features of a point data set.

Value of `funcstr`	Function Syntax	Description
`'deflevel'`	`status = hdfpt('deflevel',point_id, fieldList,fieldTypes,field`	Defines a new level within a point data set. `levelname` is the name of the level to be defined. `fieldList` is a cell array of character vectors containing field names in the new level. `fieldTypes` is also a cell array of character vectors containing the number type for each field in the `fieldList`. Valid number types include `'uchar8'`, `'uchar'`, `'char8'`, `'char'`, `'double'`, `'uint8'`, `'uint16'`, `'uint32'`, `'float'`, `'int8'`, `'int16'`, and `'int32'`. `fieldOrders` is a vector containing the order for each field.
`'deflinkage'`	`status = hdfpt('deflinkage',point_i`	Defines a linkfield between two adjacent levels. `parent` is the name of the parent level. `child` is the name of the child level. `linkfield` is the name of a field that is defined at both levels.

Basic I/O Routines

Basic I/O routines read and write data and metadata to a point data set.

Value of `funcstr`	Function Syntax	Description
`'writelevel'`	`status = hdfpt('writelevel',point_i`	Appends new records to the specified level in a point data set. `level` is the desired level index (zero-based). `data` must be a `P`-by-1 cell array where `P` is the number of fields defined for the specified level. Each cell of `data` must contain an `M(k)`-by-`N` matrix of data, where `M(k)` is the order of the `k`-th field (the number of scalar values in the field) and `N` is the number of records. The MATLAB class of the cells must match the HDF data type defined for the corresponding fields. Text data in MATLAB is automatically converted to match any of the HDF char types. Other data types must match exactly.
`'readlevel'`	`[data,status] = hdfpt('readlevel',point_id level,fieldList,records)`	Reads data from a given level in a point data set. `level` is the index (zero-based) of the desired level. `fieldList` is a cell array of character vectors specifying the list of the fields to read. `records` is a vector containing the indices (zero-based) of the records to read. `data` is a `P`-by-1 cell array where `P` is the number of requested fields. Each cell of `data` contains an `M(k)`-by-`N` matrix of data where `M(k)` is the order of the `k`-th field and

Value of `funcstr`	Function Syntax	Description
		`N` is the number of records, or `length(records)`.
`'updatelevel'`	`status = hdfpt('updatelevel',point_ level,fieldList,records,da`	Updates (corrects) data in a particular level of a point data set. `level` is the index (zero-based) of the desired level. `fieldList` is a cell array of character vectors specifying the list of field names to update. `records` is a vector containing the indices (zero-based) of the records to update. `data` is a `P`-by-1 cell array where `P` is the number of specified fields. Each cell of `data` must contain an `M(k)`-by-`N` matrix of data, where `M(k)` is the order of the `k`-th field (the number of scalar values in the field) and `N` is the number of records, or `length(records)`. The MATLAB class of the cells must match the HDF data type defined for the corresponding fields. Text data in MATLAB is automatically converted to match any of the HDF char types. Other data types must match exactly.
`'writeattr'`	`status = hdfpt('writeattr',point_id`	Writes or updates the point data set attribute with the specified name. If the attribute does not already exist, it is created.
`'readattr'`	`[data,status] = hdfpt('readattr',point_id,`	Reads the attribute data from the specified attribute.

Inquiry Routines

Inquiry routines return information about data contained in a point data set.

Value of `funcstr`	Function Syntax	Description
`'nlevels'`	`nlevels = hdfpt('nlevels',point_id)`	Returns the number of levels in a point data set. `nlevels` is -1 if the operation fails.
`'nrecs'`	`nrecs = hdfpt('nrecs',point_id,lev`	Returns the number of records in the specified level. `nrecs` is -1 if the operation fails.
`'nfields'`	`[numfields,strbufsize] = hdfpt('nfields',point_id,l`	Returns the number of fields in the specified level. `strbufsize` is the length of array containing the field names. `numfields` is -1 and `strbufsize` is `[]` if the operation fails.
`'levelinfo'`	`[numfields,fieldList,field Type,fieldOrder] = ... hdfpt('levelinfo',point_id`	Returns information on fields for a specified level. `fieldList` is a cell array of character vectors containing the field names. `fieldType` is a cell array of character vectors that defined the data type for each field. `fieldOrder` is a vector containing the order (number of scalar values) associated with each field. If the operation fails, `numfields` is -1 and the other outputs are empty.
`'levelindx'`	`level = hdfpt('levelindx',point_id`	Returns the level index (zero-based) of the level with the specified name. `level` is -1 if the operation fails.
`'bcklinkinfo'`	`[linkfield,status] = hdfpt('bcklinkinfo',point_`	Returns the linkfield to the previous level. `status` is -1 and `linkfield` is `[]` if the operation fails.

Value of `funcstr`	Function Syntax	Description
`'fwdlinkinfo'`	`[linkfield,status] = hdfpt('fwdlinkinfo',point_`	Returns the linkfield to the following level. `status` is -1 and `linkfield` is `[]` if the operation fails.
`'getlevelname'`	`[levelname,status] = hdfpt('getlevelname',point`	Returns the name of a level given the level index. `status` is -1 and `levelname` is `[]` if the operation fails.
`'sizeof'`	`[byteSize,fieldLevels] = hdfpt('sizeof',point_id,fi`	Returns the size in bytes and field levels of the specified fields. `fieldList` is a cell array of character vectors containing the field names. `byteSize` is the total size of bytes of the specified fields, and `fieldLevels` is a vector containing the level index corresponding to each field. `byteSize` is -1 and `fieldLevels` is `[]` if the operation fails.
`'attrinfo'`	`[numberType,count,status] = ...` `hdfpt('attrinfo',point_id,`	Returns the number type and size in bytes of the specified attribute. `attrname` is the name of the attribute. `numberType` is a character vector containing the name of the corresponding HDF data type of the attribute. `count` is the number of bytes used by the attribute data. `status` is -1 and `numberType` and `count` are `[]` if the operation fails.

Value of `funcstr`	Function Syntax	Description
`'inqattrs'`	`[nattrs,attrnames] = hdfpt('inqattrs',point_id)`	Retrieve information about attributes defined in a point data set. `nattrs` and `attrnames` are the number and names of all the defined attributes, respectively. If the operation fails, `nattrs` is -1 and `attrnames` is `[]`.
`'inqpoint'`	`[numpoints,pointnames] = hdfpt('inqpoint',filename)`	Retrieve number and names of point data sets defined in an HDF-EOS file. `pointnames` is a cell array of character vectors containing a the point names. `numpoints` is -1 and `pointnames` is `[]` if the operation fails.

Utility Routines

Placeholder.

Value of `funcstr`	Function Syntax	Description
`'getrecnums'`	`[outRecords,status] = hdfpt('getrecnums',... point_id,inLevel,outLevel,`	Returns the record numbers in `outLevel` corresponding the group of records specified by `inRecords` in level `inLevel`. The `inLevel` and `outLevel` arguments are zero-based level indices. `inRecords` is a vector of zero-based record indices. `status` is -1 and `outRecords` is `[]` if the operation fails.

Subset Routines

Subset routines allow reading of data from a specified geographic region.

Value of `funcstr`	Function Syntax	Description
`'defboxregion'`	`region_id = hdfpt('defboxregion',point`	Defines a longitude-latitude box region for a point. `cornerLon` is a two-element vector containing the longitudes of opposite box corners. `cornerLat` is a two-element vector containing the latitudes of opposite box corners. `region_id`is -1 if the operation fails.
`'defvrtregion'`	`period_id = hdfpt('defvrtregion',point vert_field,range)`	Defines a vertical region for a point. `vert_field` is the name of the field to subset. `range` is a two-element vector containing the minimum and maximum vertical values. `period_id` is -1 if the operation fails.
`'regioninfo'`	`[byteSize,status] = hdfpt('regioninfo',point_i region_id,level,fieldList)`	Returns the data size in bytes of the subset period of the specified level. `fieldlist` is a cell array of character vectors specifying the list of fields to extract. `status` and `byteSize` are -1 if the operation fails.
`'regionrecs'`	`[numRec,recNumbers,status] = hdfpt('regionrecs',... point_id,region_id,level)`	Returns the records numbers within the subsetted region of the specified level. `status` and `numrec` are -1 and `recNumbers` is `[]` if the operation fails.

Value of `funcstr`	Function Syntax	Description
`'extractregion'`	`[data,status] = hdfpt('extractregion',poin region_id,level,fieldList)`	Reads data from the specified subset region. `fieldList` is a cell array of character vectors specifying the list of requested fields. `data` is a `P`-by-1 cell array where `P` is the number of requested fields. Each cell of `data` contains an `M(k)`-by-`N` matrix of data where `M(k)` is the order of the `k`-th field and `N` is the number of records. `status` is -1 and `data` is `[]` if the operation fails.
`'deftimeperiod'`	`period_id = hdfpt('deftimeperiod',poin`	Defines a time period for a point data set. `period_id` is -1 if the operation fails.
`'periodinfo'`	`[byteSize,status] = hdfpt('periodinfo',point_i period_id,level,fieldList)`	Retrieves the size in bytes of the subsetted period. `fieldList` is a cell array of character vectors specifying the list of field names. `byteSize` and `status` are -1 if the operation fails.
`'periodrecs'`	`[numRec,recNumbers,status] = hdfpt('periodrecs',... point_id,period_id,level)`	Returns the records numbers within the subsetted time period of the specified level. `numRec` and `status` are -1 if the operation fails.

Value of `funcstr`	Function Syntax	Description
`'extractperiod'`	`[data,status] = hdfpt('extractperiod',... point_id,period_id,level,f`	Reads data from the specified subsetted time period. `fieldList` is a cell array of character vectors specifying the list of requested fields. `data` is a `P`-by-1 cell array where `P` is the number of requested fields. Each cell of `data` contains an `M(k)`-by-`N` matrix of data where `M(k)` is the order of the `k`-th field and `N` is the number of records. `status` is -1 and `data` is `[]` if the operation fails.

Input/Output Arguments

Most routines return the flag, `status`, which is 0 when the routine succeeds and -1 when the routine fails. Routines with syntaxes which do not contain `status` return failure information in one of its outputs as notated in the function syntaxes.

`levelName` is a character vector.

Some of the C library functions accept input values that are defined in terms of C macros. For example, the C `PTopen()` function requires an access mode input that can be DFACC_READ, DFACC_RDWR, or DFACC_CREATE, where these symbols are defined in the appropriate C header file. Where macro definitions are used in the C library, the equivalent MATLAB syntaxes use text derived from the macro names. You can either use text containing the entire macro name, or you can omit the common prefix. You can use either upper or lower case. For example, this C function call:

```
status = PTopen("PointFile.hdf",DFACC_CREATE)
```

is equivalent to these MATLAB function calls:

```
status = hdfpt('open','PointFile.hdf','DFACC_CREATE')
status = hdfpt('open','PointFile.hdf','dfacc_create')
status = hdfpt('open','PointFile.hdf','CREATE')
status = hdfpt('open','PointFile.hdf','create')
```

In cases where a C function returns a value with a macro definition, the equivalent MATLAB function returns the value as text containing the lowercase short form of the macro.

HDF number types are specified as: `'uchar8'`, `'uchar'`, `'char8'`, `'char'`, `'double'`, `'uint8'`, `'uint16'`, `'uint32'`, `'float'`, `'int8'`, `'int16'`, and `'int32'`.

In cases where the HDF-EOS library accepts `NULL`, use an empty matrix (`[ ]`).

See Also

See Also

`matlab.io.hdfeos.sw`

Introduced before R2006a

hdfread

Read data from HDF4 or HDF-EOS file

Syntax

```
data = hdfread(filename, datasetname)
data = hdfread(hinfo)
data = hdfread(...,param,value,...)
data = hdfread(filename,EOSname,param,value,...)
[data,map] = hdfread(...)
```

Description

`data = hdfread(filename, datasetname)` returns all the data in the data set specified by `datasetname` from the HDF4 or HDF-EOS file specified by `filename`. To determine the name of a data set in an HDF4 file, use the `hdfinfo` function.

Note `hdfread` can be used on Version 4.x HDF files or Version 2.x HDF-EOS files. To read data from an HDF5 file, use `h5read`.

`data = hdfread(hinfo)` returns all the data in the data set specified by the structure`hinfo`, returned by the `hdfinfo` function. Specify the field in the `hinfo` structure that relates to a particular type of data set, and use indexing to specify which data set, when there are more than one. See "Specify data set to read" on page 1-4760 for more information.

`data = hdfread(...,param,value,...)` returns subsets of the data according to the specified parameter and value pairs. See the tables below to find the valid parameters and values for different types of data sets.

`data = hdfread(filename,EOSname,param,value,...)` subsets the data field from the HDF-EOS point, grid, or swath specified by `EOSname`.

`[data,map] = hdfread(...)` returns the image `data` and the colormap `map` for an 8-bit raster image.

Subsetting Parameters

The following tables show the subsetting parameters that can be used with the `hdfread` function for certain types of HDF4 data. These data types are

- HDF Scientific Data (SD)
- HDF Vdata (V)
- HDF-EOS Grid Data
- HDF-EOS Point Data
- HDF-EOS Swath Data

Note the following:

- If a parameter requires multiple values, use a cell array to store the values. For example, the `'Index'` parameter requires three values: `start`, `stride`, and `edge`. Enclose these values in curly braces as a cell array.

  ```
  hdfread(..., 'Index', {start,stride,edge})
  ```
- All values that are indices are 1-based.

Subsetting Parameters for HDF Scientific Data (SD) Data Sets

When you are working with HDF SD files, `hdfread` supports the parameters listed in this table.

Parameter	Description
`'Index'`	Three-element cell array, `{start,stride,edge}`, specifying the location, range, and values to be read from the data set • `start` — A 1-based array specifying the position in the file to begin reading Default: `1`, start at the first element of each dimension. The values specified must not exceed the size of any dimension of the data set. • `stride` — A 1-based array specifying the interval between the values to read Default: `1`, read every element of the data set.

Parameter	Description
	• `edge` — A 1-based array specifying the length of each dimension to read Default: An array containing the lengths of the corresponding dimensions

For example, this code reads the data set `Example SDS` from the HDF file `example.hdf`. The `'Index'` parameter specifies that `hdfread` start reading data at the beginning of each dimension, read until the end of each dimension, but only read every other data value in the first dimension.

```
data = hdfread('example.hdf','Example SDS','Index',{[],[2 1],[]})
```

Subsetting Parameters for HDF Vdata Sets

When you are working with HDF Vdata files, `hdfread` supports these parameters.

Parameter	Description
`'Fields'`	Character vector specifying the name of the field to be read. When specifying multiple field names, use a cell array of character vectors.
`'FirstRecord'`	1-based number specifying the record from which to begin reading
`'NumRecords'`	Number specifying the total number of records to read

For example, this code reads the Vdata set `Example Vdata` from the HDF file `example.hdf`.

```
data = hdfread('example.hdf','Example Vdata','FirstRecord', 2,'NumRecords', 5)
```

Subsetting Parameters for HDF-EOS Grid Data

When you are working with HDF-EOS grid data, `hdfread` supports three types of parameters:

- Required parameters
- Optional parameters
- Mutually exclusive parameters — You can only specify one of these parameters in a call to `hdfread`, and you cannot use these parameters in combination with any optional parameter.

Parameter	Description
Required Parameter	

Parameter	Description
`'Fields'`	Character vector specifying the field to be read. You can specify only one field name for a Grid data set.
Mutually Exclusive Optional Parameters	
`'Index'`	Three-element cell array, `{start,stride,edge}`, specifying the location, range, and values to be read from the data set `start` — An array specifying the position in the file to begin reading Default: `1`, start at the first element of each dimension. The values must not exceed the size of any dimension of the data set. `stride` — An array specifying the interval between the values to read Default: `1`, read every element of the data set. `edge` — An array specifying the length of each dimension to read Default: An array containing the lengths of the corresponding dimensions
`'Interpolate'`	Two-element cell array, `{longitude,latitude}`, specifying the longitude and latitude points that define a region for bilinear interpolation. Each element is an N-length vector specifying longitude and latitude coordinates.
`'Pixels'`	Two-element cell array, `{longitude,latitude}`, specifying the longitude and latitude coordinates that define a region. Each element is an N-length vector specifying longitude and latitude coordinates. This region is converted into pixel rows and columns with the origin in the upper left corner of the grid. Note: This is the pixel equivalent of reading a `'Box'` region.
`'Tile'`	Vector specifying the coordinates of the tile to read, for HDF-EOS Grid files that support tiles
Optional Parameters	
`'Box'`	Two-element cell array, `{longitude,latitude}`, specifying the longitude and latitude coordinates that define a region. `longitude` and `latitude` are each two-element vectors specifying longitude and latitude coordinates.

Parameter	Description
`'Time'`	Two-element cell array, `[start stop]`, where `start` and `stop` are numbers that specify the start and end-point for a period of time
`'Vertical'`	Two-element cell array, `{dimension, range}` `dimension` — Character vector specifying the name of the data set field to be read from. You can specify only one field name for a Grid data set. `range` — Two-element array specifying the minimum and maximum range for the subset. If `dimension` is a dimension name, then `range` specifies the range of elements to extract. If `dimension` is a field name, then `range` specifies the range of values to extract. `'Vertical'` subsetting can be used alone or in conjunction with `'Box'` or `'Time'`. To subset a region along multiple dimensions, vertical subsetting can be used up to eight times in one call to `hdfread`.

For example,

```
data = hdfread('grid.hdf','PolarGrid','Fields','ice_temp','Index', {[5 10],[],[15 20]})
```

Subsetting Parameters for HDF-EOS Point Data

When you are working with HDF-EOS Point data, `hdfread` has two required parameters and three optional parameters.

Parameter	Description
Required Parameters	
`'Fields'`	Character vector containing the name of the data set field to be read. For multiple field names, use a cell array of character vectors.
`'Level'`	1-based number specifying which level to read from in an HDF-EOS Point data set
Mutually Exclusive Optional Parameters	
`'Box'`	Two-element cell array, `{longitude,latitude}`, specifying the longitude and latitude coordinates that define a region. `longitude` and `latitude` are each two-element vectors specifying longitude and latitude coordinates.

Parameter	Description
`'RecordNumbers'`	Vector specifying the record numbers to read
`'Time'`	Two-element cell array, `[start stop]`, where `start` and `stop` are numbers that specify the start and endpoint for a period of time

For example,

```
hdfread(...,'Fields',{field1, field2},...
            'Level',level,'RecordNumbers',[1:50, 200:250])
```

Subsetting Parameters for HDF-EOS Swath Data

When you are working with HDF-EOS Swath data, `hdfread` supports three types of parameters:

- Required parameters
- Optional parameters
- Mutually exclusive

You can only use one of the mutually exclusive parameters in a call to `hdfread`, and you cannot use these parameters in combination with any optional parameter.

Parameter	Description
Required Parameter	
`'Fields'`	Character vector containing the name of the data set field to be read. You can specify only one field name for a Swath data set.
Mutually Exclusive Optional Parameters	
`'Index'`	Three-element cell array, `{start,stride,edge}`, specifying the location, range, and values to be read from the data set • `start` — An array specifying the position in the file to begin reading Default: `1`, start at the first element of each dimension. The values must not exceed the size of any dimension of the data set. • `stride` — An array specifying the interval between the values to read Default: `1`, read every element of the data set. • `edge` — An array specifying the length of each dimension to read

Parameter	Description
	Default: An array containing the lengths of the corresponding dimensions
`'Time'`	Three-element cell array, `{start, stop, mode}`, where `start` and `stop` specify the beginning and the endpoint for a period of time, and `mode` is a character vector which defines the criterion for the inclusion of a cross track in a region. The cross track is within a region if any of these conditions is met: • Its midpoint is within the box (`mode='midpoint'`). • Either endpoint is within the box (`mode='endpoint'`).
Optional Parameters	
`'Box'`	Three-element cell array, `{longitude, latitude, mode}` specifying the longitude and latitude coordinates that define a region. `longitude` and `latitude` are two-element vectors that specify longitude and latitude coordinates. `mode` is a character vector which defines the criterion for the inclusion of a cross track in a region. The cross track is within a region if any of these conditions is met: • Its midpoint is within the box (`mode='midpoint'`). • Either endpoint is within the box (`mode='endpoint'`). • Any point is within the box (`mode='anypoint'`).
`'Vertical'`	Two-element cell array, `{dimension, range}` • `dimension` is a character vector specifying either a dimension name or field name to subset the data by. • `range` is a two-element vector specifying the minimum and maximum range for the subset. If `dimension` is a dimension name, then `range` specifies the range of elements to extract. If `dimension` is a field name, then `range` specifies the range of values to extract. `'Vertical'` subsetting can be used alone or in conjunction with `'Box'` or `'Time'`. To subset a region along multiple dimensions, vertical subsetting can be used up to eight times in one call to `hdfread`.

For example,

```
hdfread('swath.hdf', 'Example Swath', 'Fields', 'Temperature', ...
         'Time', {5000, 6000, 'midpoint'})
```

Examples

Read Data Set in HDF File

Specify the name of the HDF file and the name of the data set. This example reads a data set named `temperature` from a sample HDF file.

```
data = hdfread('sd.hdf','temperature');
```

Specify data set to read

Call `hdfinfo` to retrieve information about the contents of the HDF file.

```
fileinfo = hdfinfo('sd.hdf')
```

```
fileinfo = struct with fields:
      Filename: 'B:\matlab\toolbox\matlab\imagesci\sd.hdf'
    Attributes: [1×1 struct]
           SDS: [1×2 struct]
         Vdata: [1×1 struct]
```

Extract the structure containing information about the particular data set you want to import from the data returned by `hdfinfo`. This example uses the structure in the `SDS` field to retrieve a scientific data set.

```
sds_info = fileinfo.SDS(2)
```

```
sds_info = struct with fields:
       Filename: 'B:\matlab\toolbox\matlab\imagesci\sd.hdf'
           Type: 'Scientific Data Set'
           Name: 'temperature'
           Rank: 2
       DataType: 'double'
     Attributes: [1×11 struct]
           Dims: [2×1 struct]
          Label: {}
    Description: {}
```

```
          Index: 1
```

Pass this structure to `hdfread` to import the data in the data set.

```
data = hdfread(sds_info);
```

Read Data from HDF-EOS Grid Field

Read data from the HDF-EOS global grid field, `TbOceanRain`, in the example file, `example.hdf`.

```
data1 = hdfread('example.hdf','MonthlyRain','Fields','TbOceanRain');
```

Read data for the northern hemisphere for the same field. Use the `Box` parameter to specify the longitude and latitude coordinates for that region.

```
data2 = hdfread('example.hdf','MonthlyRain', ...
'Fields','TbOceanRain', ...
'Box', {[0 360],[0 90]});
```

Read Subset of Data in Data Set

Retrieve info about the example file, `example.hdf`.

```
fileinfo = hdfinfo('example.hdf');
```

Retrieve information about Scientific Data Set in `example.hdf`.

```
data_set_info = fileinfo.SDS;
```

Check the size of the data set.

```
data_set_info.Dims.Size
```

```
ans = 16

ans = 5
```

Read a subset of the data in the data set using the `'index'` parameter with `hdfread`. This example specifies a starting index of `[3 3]`, an interval of 1 between values (`[]` meaning the default value of 1), and a length of 10 rows and 2 columns.

```
data = hdfread(data_set_info,'Index',{[3 3],[],[10 2]});
```

```
data(:,1)
```

```
ans = 10×1 int16 column vector

    7
    8
    9
   10
   11
   12
   13
   14
   15
   16
```

```
data(:,2)
```

```
ans = 10×1 int16 column vector

    8
    9
   10
   11
   12
   13
   14
   15
   16
   17
```

Access Data in Fields of Vdata

Use the `Vdata` field from the information returned by `hdfinfo` to read three fields of the data, `Idx`, `Temp`, and `Dewpt`.

```
s = hdfinfo('example.hdf');
data = hdfread(s.Vdata(1),'Fields',{'Idx','Temp','Dewpt'})
```

```
data = 3×1 cell array
    [1×10 int16]
    [1×10 int16]
    [1×10 int16]
```

See Also

`hdfinfo`

Introduced before R2006a

hdftool

Browse and import data from HDF4 or HDF-EOS files

Syntax

```
hdftool
hdftool(filename)
h = hdftool( ___ )
```

Description

`hdftool` starts the HDF Import Tool, a graphical user interface used to browse the contents of HDF4 and HDF-EOS files and import data and subsets of data from these files. To open an HDF4 or HDF-EOS file, select **Open** from the **Home** tab. You can open multiple files in the HDF Import Tool by selecting **Open** from the **Home** tab.

`hdftool(filename)` opens the HDF4 or HDF-EOS file specified by `filename` in the HDF Import Tool.

`h = hdftool( ___ )` returns a handle `h` to the HDF Import Tool. To close the tool from the command line, use `close(h)`.

Examples

```
hdftool('example.hdf');
```

See Also

`hdfinfo` | `hdfread` | `uiimport`

Introduced before R2006a

hdfv

Gateway to HDF Vgroup (V) interface

Syntax

```
[out1,...,outN] = hdfv(funcstr,input1,...,inputN)
```

Description

`hdfv` is the MATLAB gateway to the HDF Vgroup (V) interface.

`[out1,...,outN] = hdfv(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the V function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between V functions in the HDF library and valid values for `funcstr`. For example, `hdfv('nattrs',vgroup_id)` corresponds to the C library call `Vnattrs(vgroup_id)`.

Access Functions

Access functions open files, initialize the Vgroup interface, and access individual groups. They also terminate access to vgroups and the Vgroup interface and close HDF files.

Value of `funcstr`	Function Syntax	Description
`'start'`	`status = hdfv('start',file_id)`	Initializes the V interface.
`'attach'`	`vgroup_id = hdfv('attach',file_id,vgr`	Establishes access to a vgroup. `access` can be `'r'` or `'w'`.
`'detach'`	`status = hdfv('detach',vgroup_id)`	Terminates access to a vgroup.
`'end'`	`status = hdfv('end',file_id)`	Terminates access to the V interface.

Create Functions

Create functions organize, label, and add data objects to vgroups.

Value of `funcstr`	Function Syntax	Description
`'setclass'`	`status = hdfv('setclass',vgroup_id`	Assigns a class to a vgroup.
`'setname'`	`status = hdfv('setname',vgroup_id,`	Assigns a name to a vgroup.
`'insert'`	`ref = hdfv('insert',vgroup_id, id)`	Adds a vgroup or vdata to an existing group. `id` can be a vdata id or a vgroup id.
`'addtagref'`	`status = hdfv('addtagref',vgroup_i`	Adds any HDF data object to an existing vgroup.
`'setattr'`	`status = hdfv('setattr',vgroup_id,`	Sets the attribute of a vgroup.

File Inquiry Functions

File inquiry functions return information about how vgroups are stored in a file. They are useful for locating vgroups in a file.

Value of `funcstr`	Function Syntax	Description
`'lone'`	`[refs,count] = hdfv('lone',file_id,maxsi`	Returns the reference numbers of vgroups not included in other vgroups.
`'getid'`	`next_ref = hdfv('getid',file_id,vgro`	Returns the reference number for the next vgroup in the HDF file.
`'find'`	`vgroup_ref = hdfv('find',file_id,vgrou`	Returns the reference number of the vgroup with the specified name if successful and zero otherwise.
`'findclass'`	`vgroup_ref = hdfv('findclass',file_id,`	Returns the reference number of the vgroup with the specified class.

Vgroup Inquiry Functions

Vgroup inquiry functions provide specific information about a specific vgroup. This information includes the class, name, member count, and additional member information.

Value of `funcstr`	Function Syntax	Description
`'getclass'`	`[class_name,status] = hdfv('getclass',vgroup_id`	Returns the name of the class of the specified group.
`'getname'`	`[vgroup_name,status] = hdfv('getname',vgroup_id)`	Returns the name of the specified group.
`'inquire'`	`[num_entries,name,status] = hdfv('inquire',vgroup_id)`	Returns the number of entries and the name of a vgroup.
`'isvg'`	`status = hdfv('isvg',vgroup_id,ref`	Checks if the object specified by ref refers to a child vgroup of the vgroup specified by `vgroup_id`.
`'isvs'`	`status = hdfv('isvs',vgroup_id,vda`	Checks if the object specified by `vdata_ref` refers to a child vdata of the vgroup specified by `vgroup_id`.
`'gettagref'`	`[tag,ref,status] = hdfv('gettagref',vgroup_i`	Retrieves a tag/reference number pair for a data object in the specified vgroup.
`'ntagrefs'`	`count = hdfv('ntagrefs',vgroup_id`	Returns the number of tag/reference number pairs contained in the specified vgroup.
`'gettagrefs'`	`[tag,refs,count] = hdfv('gettagrefs',vgroup_`	Retrieves the tag/reference pairs of all the data objects within a vgroup.
`'inqtagref'`	`tf = hdfv('inqtagref',vgroup_i`	Checks if an object belongs to a vgroup.
`'getversion'`	`version = hdfv('getversion',vgroup_`	Queries the vgroup version of a given vgroup.

Value of `funcstr`	Function Syntax	Description
`'nattrs'`	`count = hdfv('nattrs',vgroup_id)`	Queries the total number of vgroup attributes.
`'attrinfo'`	`[name,data_type,count,nby = hdfv('attrinfo',vgroup_id attr_index)`	Queries information on a given vgroup attribute.
`'getattr'`	`[values,status] = hdfv('getattr',vgroup_id,`	Queries the values of a given attribute.
`'Queryref'`	`ref = hdfv('Queryref',vgroup_id`	Returns the reference number of the specified vgroup.
`'Querytag'`	`tag = hdfv('Querytag',vgroup_id`	Returns the tag of the specified vgroup.
`'flocate'`	`vdata_ref = hdfv('flocate',vgroup_id,`	Returns the reference number of the vdata containing the specified field name in the specified vgroup.
`'nrefs'`	`count = hdfv('nrefs',vgroup_id,ta`	Returns the number of data objects with the specified tag in the specified vgroup.

Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

See Also

See Also

`hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfhx` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

hdfvf

Gateway to VF functions in HDF Vdata interface

Syntax

```
[out1,...,outN] = hdfvf(funcstr,input1,...,inputN)
```

Description

`hdfvf` is the MATLAB gateway to the VF unctions in the HDF Vdata interface.

`[out1,...,outN] = hdfvf(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the VF function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between VF functions in the HDF library and valid values for `funcstr`. For example, `hdfvf('nfields',vdata_id)` corresponds to the C library call `VFnfields(vdata_id)`.

Field Inquiry Functions

Field inquiry functions provide specific information about the fields in a given vdata, including the field's size, name, order, type, and number of fields in the vdata.

Value of `funcstr`	Function Syntax	Description
`'fieldesize'`	`fsize = hdfvf('fieldesize',vdata_id`	Retrieves the field size (as stored in a file) of a specified field.
`'fieldisize'`	`fsize = hdfvf('fieldisize',vdata_id`	Retrieves the field size (as stored in memory) of a specified field.
`'fieldname'`	`name = hdfvf('fieldname',vdata_id,`	Retrieves the name of the specified field in the given vdata.
`'fieldorder'`	`order = hdfvf('fieldorder',vdata_id`	Retrieves the order of the specified field in the given vdata.

Value of `funcstr`	Function Syntax	Description
`'fieldtype'`	`data_type = hdfvf('fieldtype',vdata_id,`	Retrieves the data type for the specified field in the given vdata.
`'nfields'`	`count = hdfvf('nfields',vdata_id)`	Retrieves the total number of fields in the specified vdata.

Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

See Also

See Also

`hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfhx` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

hdfvh

Gateway to VH functions in HDF Vdata interface

Syntax

```
[out1,...,outN] = hdfvh(funcstr,input1,...,inputN)
```

Description

`hdfvh` is the MATLAB gateway to VH functions in the HDF Vdata interface.

`[out1,...,outN] = hdfvh(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the VH function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between VH functions in the HDF library and valid values for `funcstr`.

High-level Vdata Functions

High-level Vdata functions write data to single-field vdatas.

Value of `funcstr`	Function Syntax	Description
`'makegroup'`	`vgroup_ref = hdfvh('makegroup',file_id, vgroup_name,vgroup_class)`	Groups a collection of data objects within a vgroup.
`'storedata'`	`count = hdfvh('storedata',file_id, vdata_name,vdata_class)`	Creates vdatas containing records limited to one field with one component per field.
`'storedatam'`	`count = hdfvh('storedatam',file_id vdata_name,vdata_class)`	Creates vdatas containing records with one field containing one or more components.

Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

See Also

See Also

`hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfhx` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

hdfvs

Gateway to VS functions in HDF Vdata interface

Syntax

```
[out1,...,outN] = hdfvs(funcstr,input1,...,inputN)
```

Description

`hdfvs` is the MATLAB gateway to the VS functions in the HDF Vdata interface.

`[out1,...,outN] = hdfvs(funcstr,input1,...,inputN)` returns one or more outputs corresponding to the VS function in the HDF library specified by `functstr`.

There is a one-to-one correspondence between VS functions in the HDF library and valid values for `funcstr`. For example, `hdfvs('detach',vdata_id)` corresponds to the C library call `VSdetach(vdata_id)`.

Access Functions

Access functions attach, or allow access, to vdatas. Data transfer can only occur after a vdata has been accessed. These routines also detach from, or properly terminate access to, vdatas when data transfer has been completed.

Value of `funcstr`	Function Syntax	Description
`'attach'`	`vdata_id = hdfvs('attach',file_id,vd`	Establishes access to a specified vdata. `access` can be `'r'` or `'w'`.
`'detach'`	`status = hdfvs('detach',vdata_id)`	Terminates access to a specified vdata.

Read and Write Functions

Read and write functions read and write the contents of a vdata.

Value of `funcstr`	Function Syntax	Description
`'fdefine'`	`status = hdfvs('fdefine',vdata_id,`	Defines a new vdata field. `data_type` is character vector containing the HDF number type. Specify `data_type` as one of these values: `'uchar8'`, `'uchar'`, `'char8'`, `'char'`, `'double'`, `'uint8'`, `'uint16'`, `'uint32'`, `'float'`, `'int8'`, `'int16'`, or `'int32'`.
`'setclass'`	`status = hdfvs('setclass',vdata_id`	Assigns a class to a vdata.
`'setfields'`	`status = hdfvs('setfields',vdata_i`	Specifies the vdata fields to be written.
`'setinterlace'`	`status = hdfvs('setinterlace',vdat`	Sets the interlace mode for a vdata. `interlace` can be `'full'` or `'no'`.
`'setname'`	`status = hdfvs('setname',vdata_id,`	Assigns a name to a vdata.
`'write'`	`count = hdfvs('write', vdata_id, data)`	Writes to a vdata. data must be an `nfields`-by-1 cell array. Each cell must contain an `order(i)`-by-`n` vector of data where `order(i)` is the number of scalar values in each field. The types of the data must match the field types set via `hdfvs('setfields')` or the fields in an already existing vdata.

Value of `funcstr`	Function Syntax	Description
`'read'`	`[data,count] = hdfvs('read',vdata_id,n)`	Reads from a vdata. Data is returned in a `nfields`-by-1 cell array. Each cell contains a `order(i)`-by-`n` vector of data where `order` is the number of scalar values in each field. The fields are returned in the same order as specified in `hdfvs('setfields',...)`.
`'seek'`	`pos = hdfvs('seek',vdata_id,rec`	Seeks to a specified record in a vdata.
`'setattr'`	`status = hdfvs('setattr',vdata_id,`	Sets the attribute of a vdata field or vdata.
`'setexternalfile'`	`status = hdfvs('setexternalfile',v`	Stores vdata information in an external file.
`'getattr'`	`[value,status] = hdfvs('getattr',vdata_id,`	Reads the value of an attribute attached to a vdata or a vdata field. Set `field_index` to `'vdata'` to retrieve an attribute attached to the field itself. Set `field_index` to the numerical index of the field to retrieve an attribute attached to a vdata field.
`'setattr'`	`status = hdfvs('setattr',vdata_id,`	Sets the attribute of a vdata field or vdata.`field_index` can be an index number or `'vdata'`.

File Inquiry Functions

File inquiry functions provide information about how vdatas are stored in a file. They are useful for locating vdatas in a file.

Value of `funcstr`	Function Syntax	Description
`'find'`	`vdata_ref = hdfvs('find',file_id,vdat`	Searches for a given vdata name in the specified HDF file.

Value of `funcstr`	Function Syntax	Description
`'findclass'`	`vdata_ref = hdfvs('findclass',file_id`	Returns the reference number of the first vdata corresponding to the specified vdata class.
`'getid'`	`next_ref = hdfvs('getid',file_id,vda`	Returns the identifier of the next vdata in the file.
`'lone'`	`[refs,count] = hdfvs('lone',file_id,maxs`	Returns the reference numbers of the vdatas that are not linked into vgroups.

Vdata Inquiry Functions

Vdata inquiry functions provide specific information about a given vdata, including the vdata's name, class, number of fields, number of records, tag and reference pairs, interlace mode, and size.

Value of `funcstr`	Function Syntax	Description
`'fexist'`	`status = hdfvs('fexist',vdata_id,f`	Tests for the existence of fields in the specified vdata.
`'inquire'`	`[n,interlace,fields,nbyte = ... hdfvs('inquire',vdata_id)`	Returns information about the specified vdata.
`'elts'`	`count = hdfvs('elts',vdata_id)`	Returns the number of records in the specified vdata.
`'getclass'`	`[class_name,status] = hdfvs('getclass',vdata_id`	Returns the HDF class of the specified vdata.
`'getfields'`	`[field_names,count] = hdfvs('getfields',vdata_i`	Returns all field names within the specified vdata.
`'getinterlace'`	`[interlace,status] = hdfvs('getinterlace',vdat`	Retrieves the interlace mode of the specified vdata.
`'getname'`	`[vdata_name,status] = hdfvs('getname',vdata_id)`	Retrieves the name of the specified vdata.
`'getversion'`	`version = hdfvs('getversion',vdata_`	Returns the version number of a vdata.

Value of `funcstr`	Function Syntax	Description
`'sizeof'`	`nbytes = hdfvs('sizeof',vdata_id,f`	Returns the fields sizes of the specified vdata.
`'Queryfields'`	`[fields,status] = hdfvs('Queryfields',vdata`	Returns the field names of the specified vdata.
`'Queryname'`	`[name,status] = hdfvs('Queryname',vdata_i`	Returns the name of the specified vdata.
`'Queryref'`	`ref = hdfvs('Queryref',vdata_id`	Retrieves the reference number of the specified vdata.
`'Querytag'`	`tag = hdfvs('Querytag',vdata_id`	Retrieves the tag of the specified vdata.
`'Querycount'`	`[count,status] = hdfvs('Querycount',vdata_`	Returns the number of records in the specified vdata.
`'Queryinterlace'`	`[interlace,status] = hdfvs('Queryinterlace',vd`	Returns the interlace mode of the specified vdata.
`'Queryvsize'`	`vsize = hdfvs('Queryvsize',vdata_`	Retrieves the local size in bytes of the specified vdata record.
`'findex'`	`[field_index,status] = hdfvs('findex',vdata_id,f`	Queries the index of a vdata field given the field name.
`'nattrs'`	`count = hdfvs('nattrs',vdata_id)`	Returns the number of attributes of the specified vdata and the vdata fields contained in it.
`'fnattrs'`	`count = hdfvs('fnattrs',vdata_id,`	Queries the total number of vdata attributes.
`'findattr'`	`attr_index = hdfvs('findattr',vdata_id`	Retrieves the index of an attribute given the attribute name.
`'isattr'`	`tf = hdfvs('isattr',vdata_id)`	Determines if the given vdata is an attribute.

Value of `funcstr`	Function Syntax	Description
`'attrinfo'`	`[name,data_type,count,nby = hdfvs('attrinfo',... vdata_id,field_index,attr`	Returns the name, data type, number of values, and the size of the values of the specified attributes of the specified vdata field or vdata.

Output Arguments

A `status` or identifier output of -1 indicates that the operation failed.

See Also

See Also

`hdfdf24` | `hdfdfr8` | `hdfh` | `hdfhd` | `hdfhe` | `hdfhx` | `hdfml` | `hdfv` | `hdfvf` | `hdfvh` | `hdfvs` | `matlab.io.hdf4.sd`

Introduced before R2006a

heatmap

Create heatmap chart

Syntax

```
h = heatmap(tbl,xvar,yvar)
h = heatmap(tbl,xvar,yvar,'ColorVariable',cvar)

h = heatmap(cdata)
h = heatmap(xvalues,yvalues,cdata)

h = heatmap( ___ ,Name,Value)
h = heatmap(parent, ___ )
```

Description

`h = heatmap(tbl,xvar,yvar)` creates a heatmap from the table `tbl` and returns the `HeatmapChart` object. The `xvar` input indicates the table variable to display along the *x*-axis. The `yvar` input indicates the table variable to display along the *y*-axis. The default colors are based on a count aggregation, which totals the number of times each pair of *x* and *y* values appears together in the table. Use `h` to modify the heatmap after it is created. For a list of properties, see HeatmapChart Properties.

`h = heatmap(tbl,xvar,yvar,'ColorVariable',cvar)` uses the table variable specified by `cvar` to calculate the color data. The default calculation method is a mean aggregation.

`h = heatmap(cdata)` creates a heatmap from matrix `cdata`. The heatmap has one cell for each value in `cdata`.

`h = heatmap(xvalues,yvalues,cdata)` specifies the labels for the values that appear along the *x*-axis and *y*-axis.

`h = heatmap( ___ ,Name,Value)` specifies additional options for the heatmap using one or more name-value pair arguments. Specify the options after all other input arguments. For a list of properties, see HeatmapChart Properties.

`h = heatmap(parent, ___ )` creates the heatmap in the figure, panel, or tab specified by `parent`.

Examples

Create Heatmap from Tabular Data

Create a heatmap from a table of data for medical patients.

Load the `patients` data set and create a table from a subset of the variables loaded into the workspace. Then create a heatmap that counts the total number of patients with the same set of `Smoker` and `SelfAssessedHealthStatus` values.

```
load patients
tbl = table(LastName,Age,Gender,SelfAssessedHealthStatus,...
    Smoker,Weight,Location);
h = heatmap(tbl,'Smoker','SelfAssessedHealthStatus');
```

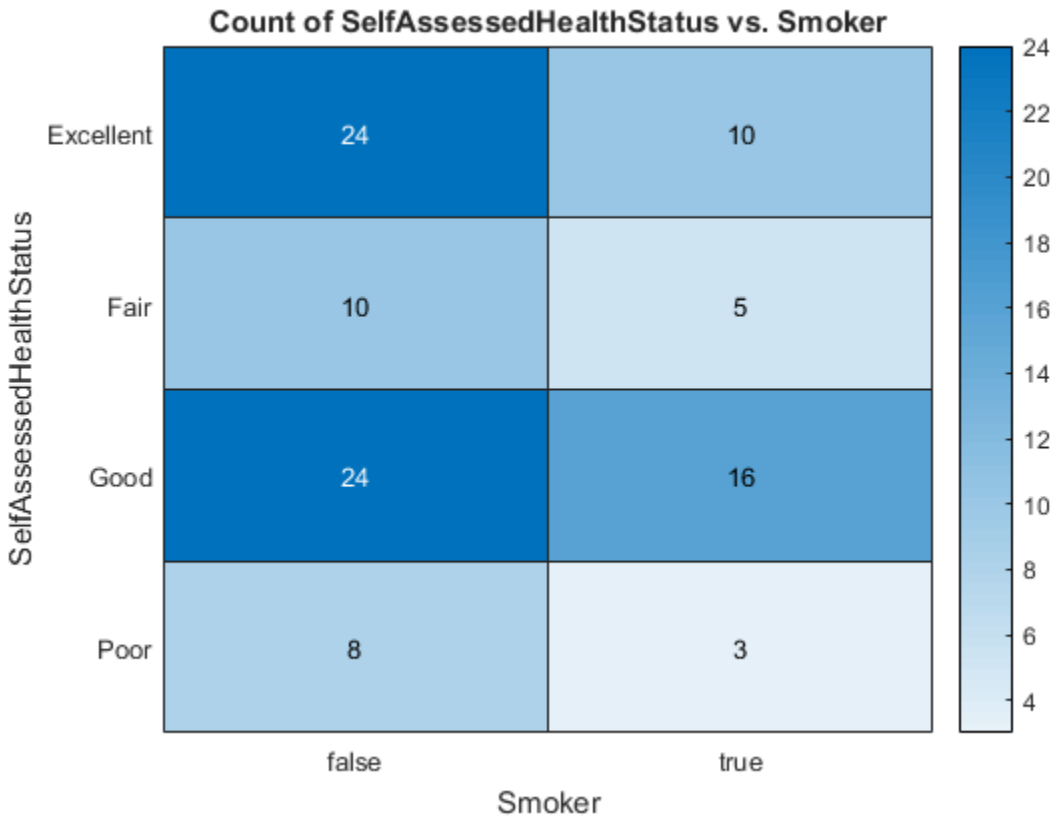

Reorder Heatmap Labels

Create a heatmap and reorder the labels along the *y*-axis.

Load the `patients` data set and create a heatmap from the data. Assign the `HeatmapChart` object to the variable `h`.

```
load patients
tbl = table(LastName,Age,Gender,SelfAssessedHealthStatus,...
    Smoker,Weight,Location);
h = heatmap(tbl,'Smoker','SelfAssessedHealthStatus');
```

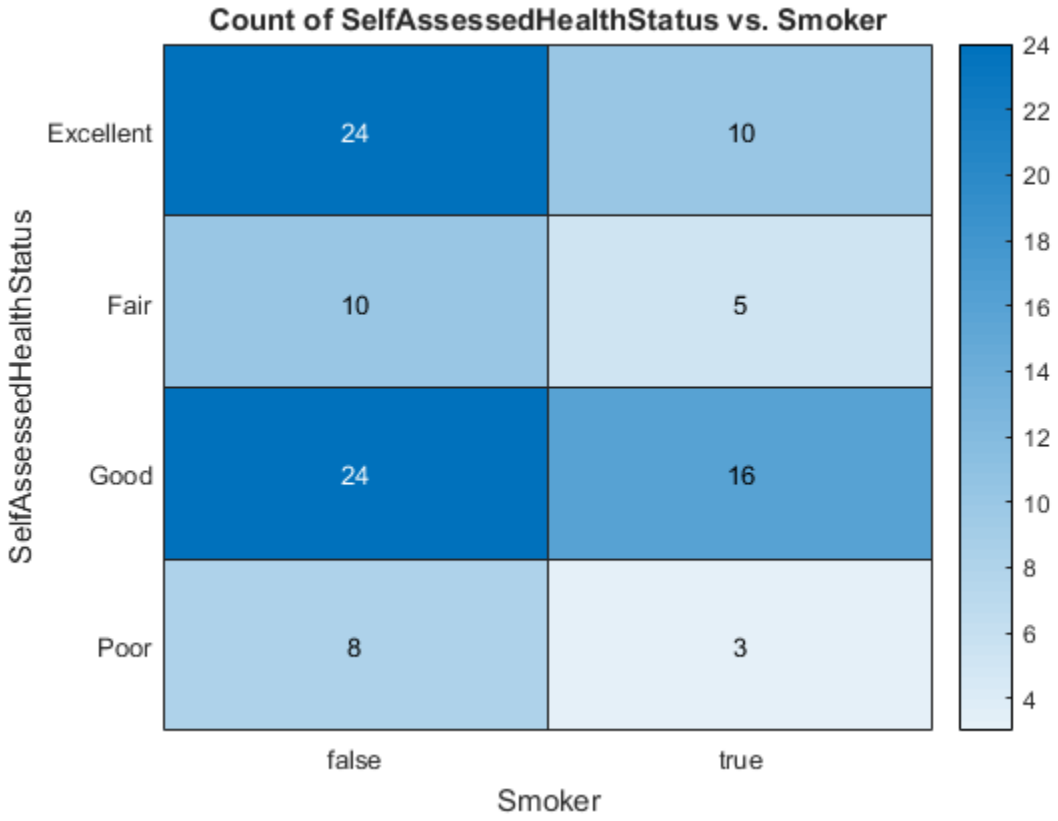

Reorder the labels along the *y*-axis. First change the data in the `SelfAssessedHealthStatus` column of the table from a cell array to a categorical array using the `categorical` function. Then use the `reordercats` function to reorder the categories.

You can apply these functions to the table in the workspace (`tbl`). Alternatively, you can apply them to table stored in the `SourceTable` property of the `HeatmapChart` object (`h.SourceTable`). Applying them to the table stored in the `HeatmapChart` object avoids affecting the original data.

```
h.SourceTable.SelfAssessedHealthStatus = categorical(h.SourceTable.SelfAssessedHealthSt
neworder = {'Excellent','Good','Fair','Poor'};
h.SourceTable.SelfAssessedHealthStatus = reordercats(h.SourceTable.SelfAssessedHealthSt
```

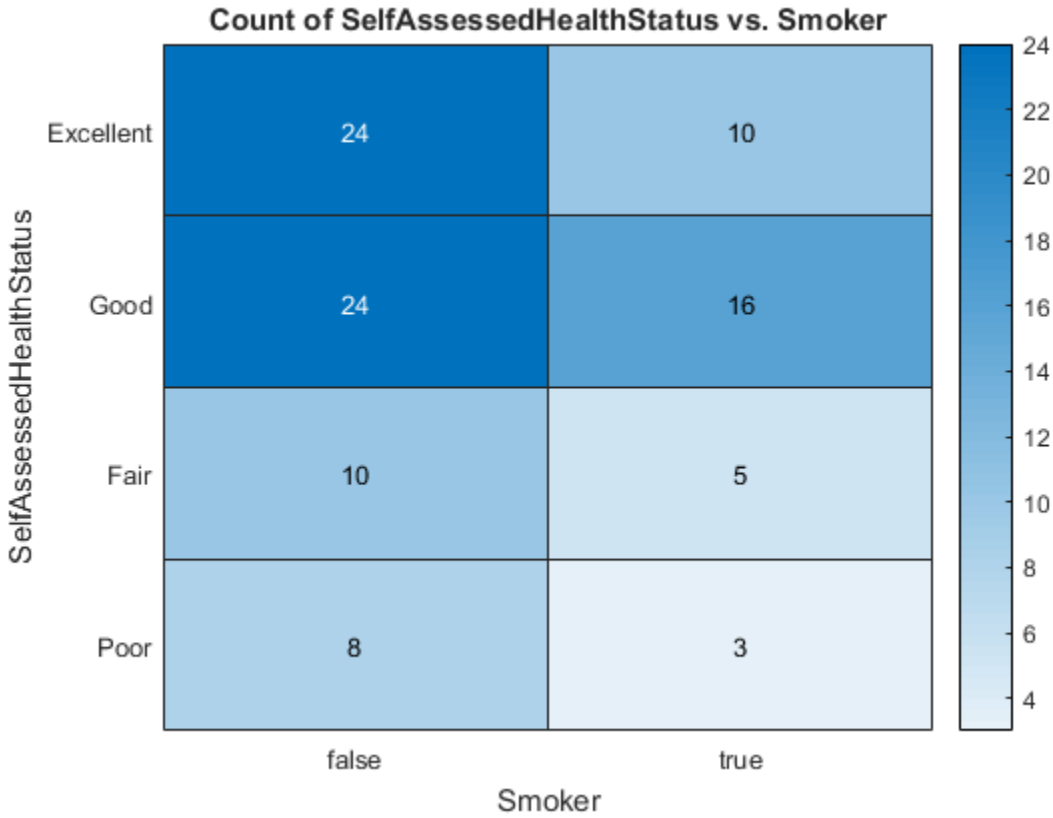

Similarly, you can add, remove, or rename the heatmap labels using the `addcats`, `removecats`, or `renamecats` functions, respectively.

Specify Table Variable for Heatmap Colors

Create a heatmap and specify the table variable to use when determining the heatmap cell colors.

Load the `patients` data set and create a heatmap from the data. Color each cell using the average age of patients with a particular pair of `Smoker` and `SelfAssessedHealthStatus` values by setting the `ColorVariable` option to `'Age'`.

```
load patients
```

```
tbl = table(LastName,Age,Gender,SelfAssessedHealthStatus,...
    Smoker,Weight,Location);
h = heatmap(tbl,'Smoker','SelfAssessedHealthStatus','ColorVariable','Age');
```

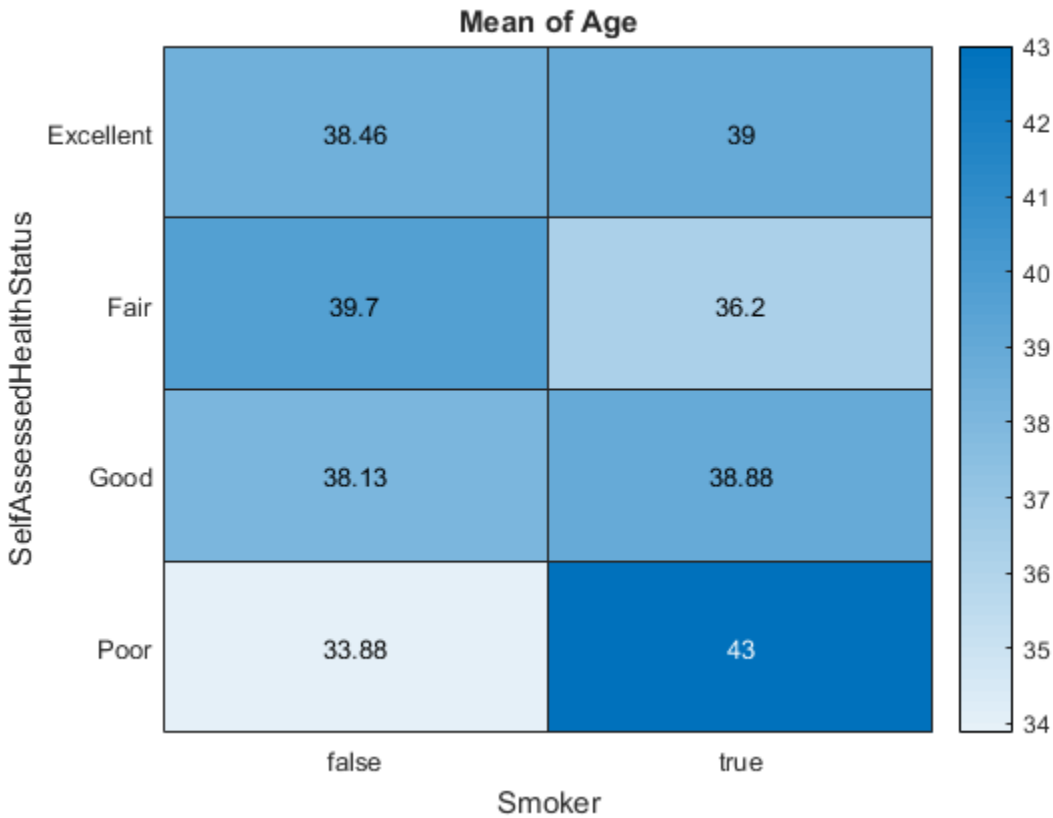

Specify Calculation Method for Color Data

Create a heatmap and specify the table variable and calculation method to use when determining the heatmap cell colors.

Load the patients data set and create a heatmap from the data. Color each cell using the median age of patients with a particular pair of `Smoker` and `SelfAssessedHealthStatus` values. Specify the `ColorVariable` option as `'Age'` and the `ColorMethod` option as `'median'`.

```
load patients
tbl = table(LastName,Age,Gender,SelfAssessedHealthStatus,...
    Smoker,Weight,Location);
h = heatmap(tbl,'Smoker','SelfAssessedHealthStatus','ColorVariable','Age','ColorMethod
```

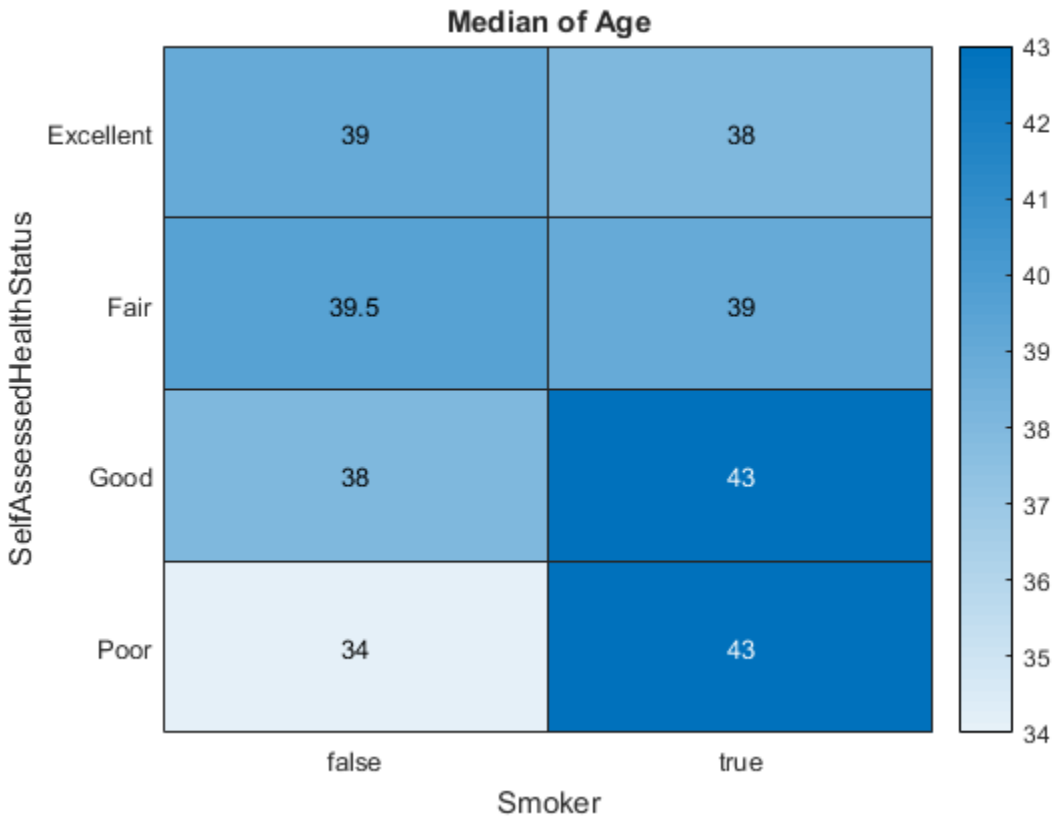

Create Heatmap from Matrix Data

Create a matrix of data. Then create a heatmap of the matrix values. The default labels along the *x*-axis and *y*-axis appear as 1, 2, 3, and so on.

```
cdata = [45 60 32; 43 54 76; 32 94 68; 23 95 58];
h = heatmap(cdata);
```

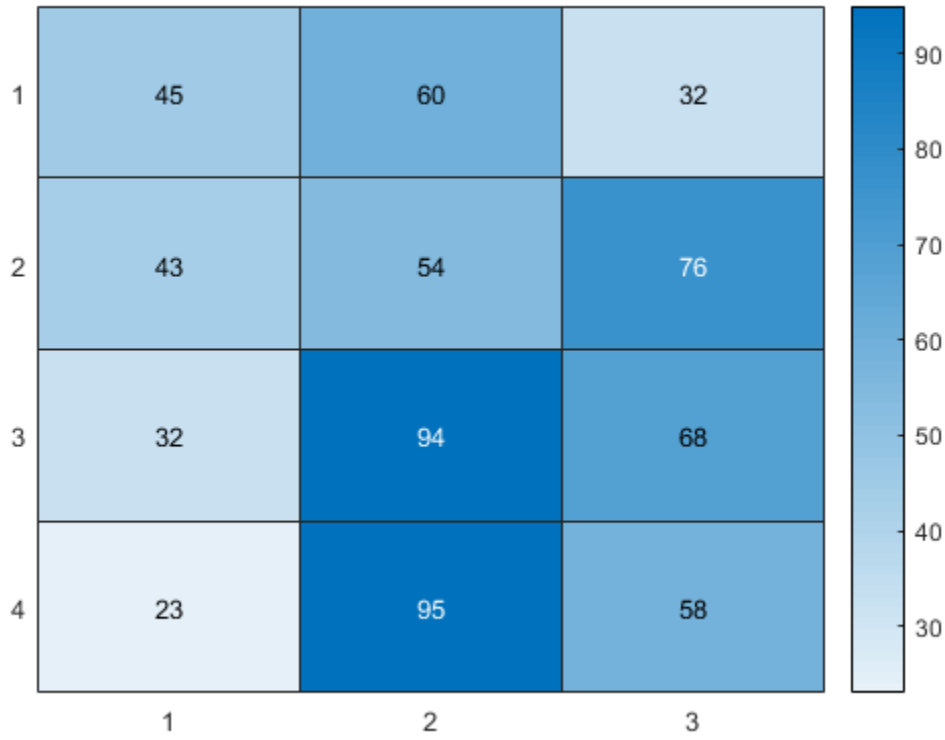

Create Heatmap from Matrix Data Using Custom Axis Labels

Create a matrix of data. Then create a heatmap of the matrix values. Use custom labels along the *x*-axis and *y*-axis by specifying the first two input arguments as the labels you want. Specify the title and axis labels by setting properties of the `HeatmapChart` object.

```
cdata = [45 60 32; 43 54 76; 32 94 68; 23 95 58];
xvalues = {'Small','Medium','Large'};
yvalues = {'Green','Red','Blue','Gray'};
h = heatmap(xvalues,yvalues,cdata);

h.Title = 'T-Shirt Orders';
h.XLabel = 'Sizes';
h.YLabel = 'Colors';
```

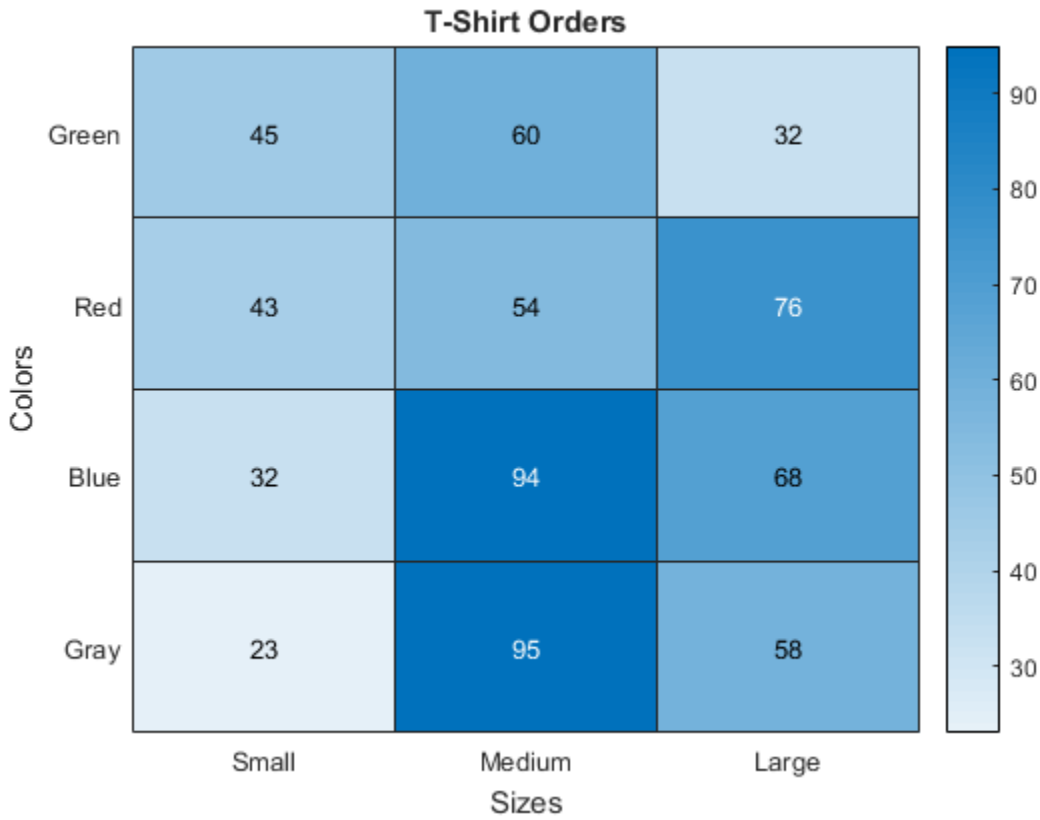

Normalize Colors Along Each Row or Column

Create a heatmap and normalize the colors along each column or row by setting the `ColorScaling` property.

Read the sample file `outages.csv` into a table. The sample file contains data representing electric utility outages in the Unites States. The table contains six columns: `Region`, `OutageTime`, `Loss`, `Customers`, `RestorationTime`, and `Cause`. Display the first five rows of each column.

```
T = readtable('outages.csv');
T(1:5,:)
```

```
ans =

  5×6 table

      Region          OutageTime        Loss     Customers     RestorationTime

    ___________    _________________    ______    __________    _________________    ____

    'SouthWest'    2002-02-01 12:18    458.98    1.8202e+06    2002-02-07 16:50    'wi
    'SouthEast'    2003-01-23 00:49    530.14    2.1204e+05    NaT                 'wi
    'SouthEast'    2003-02-07 21:15     289.4    1.4294e+05    2003-02-17 08:14    'wi
    'West'         2004-04-06 05:44    434.81    3.4037e+05    2004-04-06 06:10    'eq
    'MidWest'      2002-03-16 06:18    186.44    2.1275e+05    2002-03-18 23:23    'se
```

Create a heatmap that shows the different regions along the *x*-axis and the different outage causes along the *y*-axis. In each cell, show how many times each region experienced a power outage due to a particular cause.

```
h = heatmap(T,'Region','Cause');
```

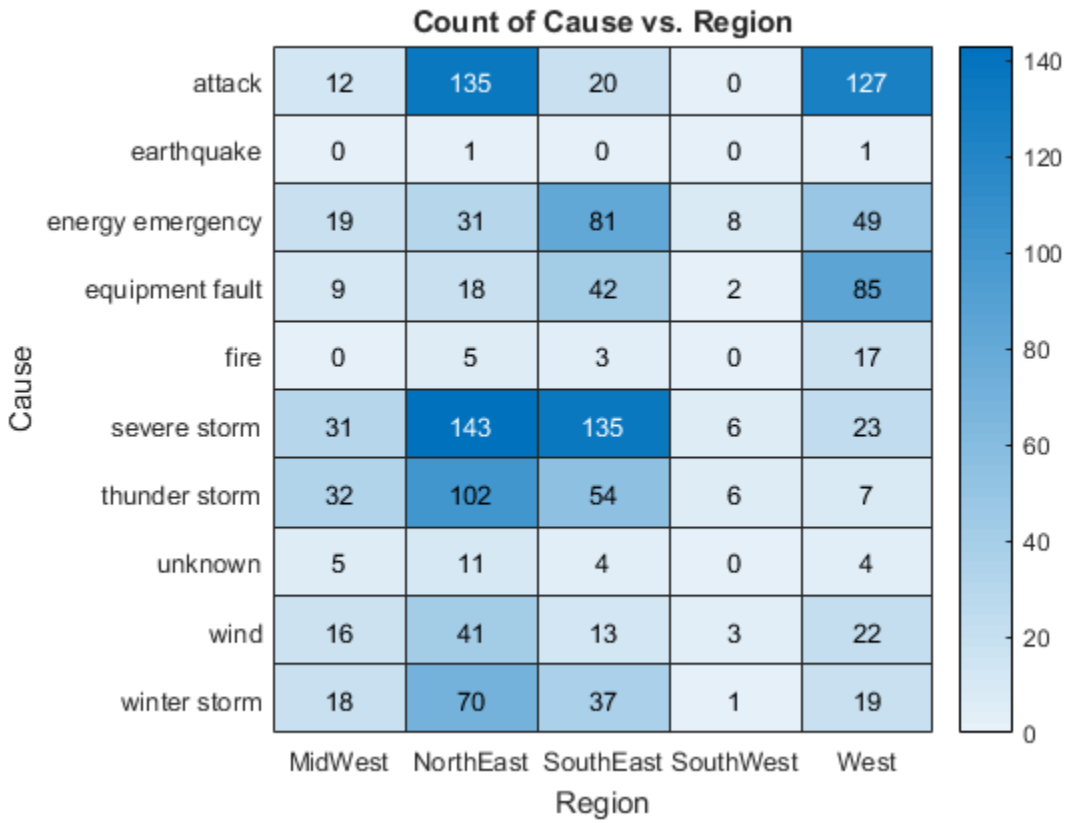

Normalize the colors along each column. The smallest value in each column maps to the first color in the colormap and the largest value maps to the last color. The last color indicates the cause that caused the most power outages for each region.

```
h.ColorScaling = 'scaledcolumns';
```

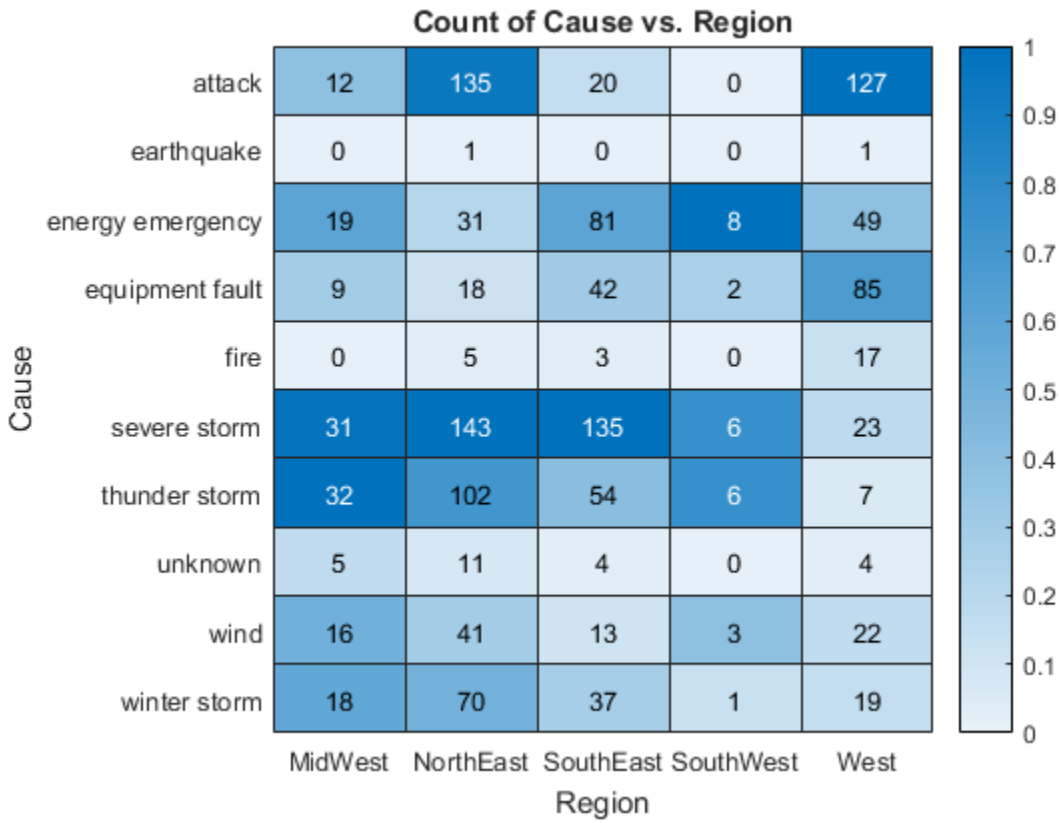

Normalize the colors along each row instead. The smallest value in each row maps to the first color in the colormap and the largest value maps to the last color. The last color indicates the region that experienced the most power outages due to each cause.

```
h.ColorScaling = 'scaledrows';
```

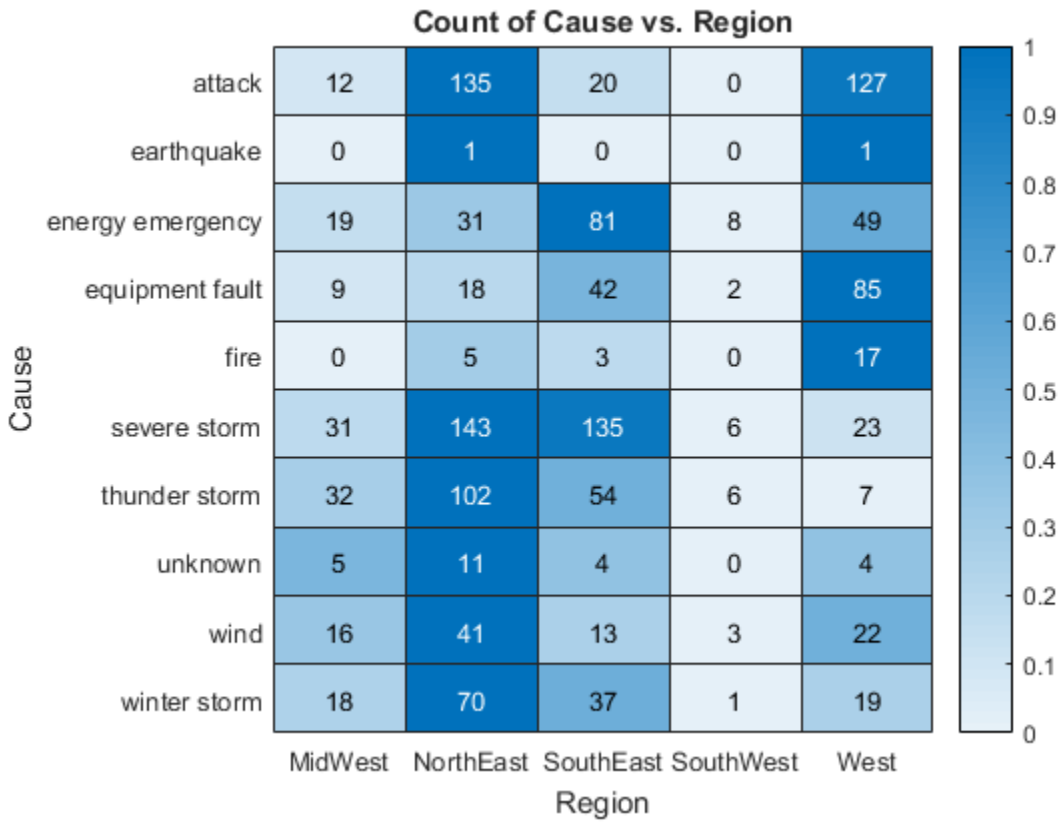

Compute Color Data Using Custom Aggregation Method

Create a heatmap and color the cells using data computed with a custom aggregation method. Use the `accumarray` function to compute the color data.

Read the sample file `Temperature.csv` into a table. The file contains three columns: `Month`, `Year`, and `TemperatureF`.

```
tbl = readtable(fullfile(matlabroot,'examples','graphics','TemperatureData.csv'));
```

Create categorical arrays from the `Month` and `Year` columns of the table. Then determine the unique months and years to use as labels along the *x*-axis and *y*-axis.

```
months = categorical(tbl.Month);
```

```
years = categorical(tbl.Year);
xlabels = categories(months);
ylabels = categories(years);
```

Determine the final size of the resulting color data based on the number of unique months and years.

```
nummonths = numel(xlabels);
numyears = numel(ylabels);
```

Convert the categorical `months` and `years` arrays into numeric indices to use with the `accumarray` function. Compute the color data as the maximum temperature for each month and year combination using the `accumarray` function. Use `NaN` for missing month and year combinations.

```
x = double(months);
y = double(years);
temps = tbl.TemperatureF;
cdata = accumarray([y,x],temps,[numyears,nummonths],@max,NaN);
```

Create the heatmap. Label the *x*-axis and *y*-axis with the months and years, respectively. Color the heatmap cells using the computed matrix data.

```
h = heatmap(xlabels,ylabels,cdata);
```

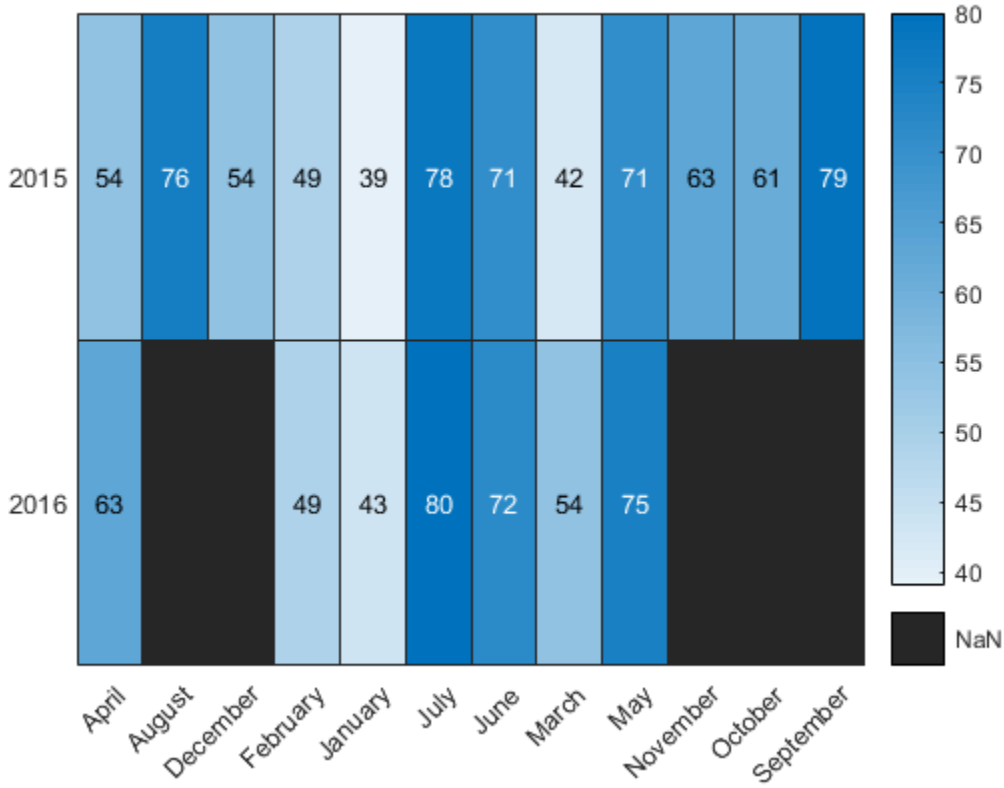

Note: You can use the `reordercats` function for categorical arrays to reorder the axis labels.

- "Create Heatmap from Tabular Data"
- "Access Data in a Table"

Input Arguments

`tbl` — Source table

table

Source table, specified as a table. You can create a table from workspace variables using the `table` function, or you can import data as a table using the `readtable` function.

The SourceTable property of the `HeatmapChart` object stores the table.

`xvar` — Table variable for *x*-axis

character vector | string | numeric scalar | logical vector

Table variable for *x*-axis, specified in one of these forms:

- Character vector or string indicating one of the variable names. For example, `heatmap(tbl,'HealthStatus','Gender')` selects the variable named `'HealthStatus'` for the *x*-axis.
- Numeric scalar indicating the table variable index. For example, `heatmap(tbl,2,3)` selects the second variable in the table for the *x*-axis.
- Logical vector containing one `true` element.

The values associated with your table variable must be grouped into a finite set of discrete categories that the `categorical` function accepts. If the values are not grouped into a finite set of categories, use the `discretize` function to group them.

The labels that appear along the *x*-axis are in alphabetical order. You can customize the labels using categorical arrays. For an example, see "Create Heatmap from Tabular Data".

The XVariable property of the `HeatmapChart` object stores the selected variable.

`yvar` — Table variable for *y*-axis

character vector | string | numeric scalar | logical vector

Table variable for *y*-axis, specified in one of these forms:

- Character vector or string of one of the variable names. For example, `heatmap(tbl,'HealthStatus','Gender')` selects the variable named `'HealthStatus'` for the *y*-axis.
- Numeric scalar indicating the table variable index. For example, `heatmap(tbl,2,3)` selects the third variable in the table for the *y*-axis.
- Logical vector containing one `true` element.

The values associated with your table variable must be grouped into a finite set of discrete categories that the `categorical` function accepts. If the values are not grouped into a finite set of categories, use the `discretize` function to group them.

The labels that appear along the *y*-axis are in alphabetical order. You can customize the labels using categorical arrays. For an example, see "Create Heatmap from Tabular Data".

The YVariable property of the `HeatmapChart` object stores the selected variable.

`cvar` — Table variable for color data

character vector | string | numeric scalar | logical vector

Table variable for color data, specified in one of these forms:

- A character vector or string of one of the variable names. For example, `heatmap(__,'ColorVariable,'HealthStatus')` selects the variable named `'HealthStatus'` for the *y*-axis.
- A numeric scalar indicating the table variable index. For example, `heatmap(__,'ColorVariable',1)` selects the third variable in the table for the *y*-axis.
- A logical vector containing one `true` element.

The values associated with your table variable must be of a numeric type or `logical`.

The property value is empty `[]` when using matrix data. The ColorVariable property of the `HeatmapChart` object stores the selected variable. The `ColorData` property populates with data based on the selected variable.

By default, `heatmap` calculates the color data based on a mean aggregation. To change the calculation method, set the `ColorMethod` property.

`cdata` — Color data

matrix

Color data for the heatmap cells, specified as a matrix.

The ColorData property of the `HeatmapChart` object stores the values.

Example: `[40 24 68; 68 37 58; 49 23 46]`

`xvalues` — Values appearing along *x*-axis

categorical array | string array | numeric array | cell array of character vectors

Values appearing along the *x*-axis, specified as a categorical array, string array, numeric array, or cell array of character vectors.

Example: `{'small','medium','large'}`

Example: `categorical({'small','medium','large'})`

`yvalues` — Values appearing along *y*-axis
categorical array | string array | numeric array | cell array of character vectors

Values appearing along *y*-axis, specified as a categorical array, string array, numeric array, or cell array of character vectors.

Example: `{'small','medium','large'}`

Example: `categorical({'small','medium','large'})`

`parent` — Parent container
figure object | panel object | tab object

Parent container in which to plot, specified as a figure, panel, or tab object.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example:
`heatmap(tbl,xvar,yvar,'ColorVariable','Temperatures','ColorMethod','median')`

Note: The properties listed here are only a subset. For a complete list, see HeatmapChart Properties.

`'Title'` — Chart title
string | character vector | `''`

Chart title, specified as a string, character vector, or `''` for no title. For tabular data, the default chart has an autogenerated title.

Example: `h = heatmap(__,'Title','My Title Text')`

Example: `h.Title = 'My Title Text'`

`'ColorMethod'` — Method to calculate color data

`'count'` | `'mean'` | `'median'` | `'sum'` | `'none'`

Method to calculate the color data values (stored in `ColorData`), specified as `'count'`, `'mean'`, `'median'`, `'sum'`, or `'none'`.

If you do not want to use a third variable from the table for the color data, then specify the method in this table.

Method	Description
`'count'`	Count the number of times each pair of *x* and *y* values appears in the source table. This option does not use the `ColorVariable` property and is the default value when you do not specify the `ColorVariable` parameter.

If you want to use a third variable from the table for the color data, then set the `ColorVariable` property to the variable you want and specify the `ColorMethod` property as one of the methods listed in this table. For each pair of *x* and *y* values, the methods use the corresponding values in the `ColorVariable` column of the source table to calculate the data.

Method	Description
`'mean'`	Calculate the average value. This value is the default value when you specify the `ColorVariable` property.
`'median'`	Calculate the median value.
`'sum'`	Sum the values.
`'none'`	Use the value exactly. The table cannot contain more than one instance of each pair of *x* and *y* values.

If you want to compute your own matrix of aggregated data, use the `accumarray` function. Specify the matrix as input to the `heatmap` function.

Note: This property is ignored when using matrix data. The value appears as `'none'`.

Example: `h = heatmap(__,'ColorMethod','median')`

Example: `h.ColorMethod = 'median'`

See Also

See Also

Functions

`categorical` | `readtable` | `table`

Properties

HeatmapChart Properties

Topics

"Create Heatmap from Tabular Data"
"Access Data in a Table"

Introduced in R2017a

HeatmapChart Properties

Control heatmap chart appearance and behavior

Description

`HeatmapChart` properties control the appearance and behavior of a `HeatmapChart` object. By changing property values, you can modify certain aspects of the heatmap chart. For example, you can add a title:

```
h = heatmap
h.Title = 'My Heatmap Title';
```

Tabular Data Options

`SourceTable` — Source table

table

Source table, specified as a table.

You can create a table from variables in your workspace using the `table` function, or you can import a file as a table using the `readtable`.

Note: The property is ignored when using matrix data.

`XVariable` — Table variable for *x*-axis

character vector | string | numeric scalar | logical vector

Table variable for *x*-axis, specified in one of these forms:

- Character vector or string indicating one of the variable names.
- Numeric scalar indicating the table variable index.
- Logical vector containing one `true` element.

The values associated with your table variable must be grouped into a finite set of discrete categories that the `categorical` function accepts. If the values are not grouped into a finite set of categories, use the `discretize` function to group them.

The labels that appear along the *x*-axis are in alphabetical order. You can customize the labels using categorical arrays. For an example, see "Create Heatmap from Tabular Data".

Note: The property is ignored when using matrix data.

Example: `h.XVariable = 'Location'` specifies the variable named `'Location'`.

`YVariable` — Table variable for *y*-axis

character vector | string | numeric scalar | logical vector

Table variable for *y*-axis, specified in one of these forms:

- Character vector or string indicating one of the variable names.
- Numeric scalar indicating the table variable index.
- Logical vector containing one `true` element.

The values associated with your table variable must be grouped into a finite set of discrete categories that the `categorical` function accepts. If the values are not grouped into a finite set of categories, use the `discretize` function to group them.

The labels that appear along the *y*-axis are in alphabetical order. You can customize the labels using categorical arrays. For an example, see "Create Heatmap from Tabular Data".

Note: The property is ignored when using matrix data.

Example: `h.YVariable = 'Location'` specifies the variable named `'Location'`.

`ColorVariable` — Table variable for color data

character vector | string | numeric scalar | logical vector

Table variable for color data, specified in one of these forms:

- Character vector or string indicating one of the variable names.
- Numeric scalar indicating the table variable index.
- Logical vector containing one `true` element.

The values associated with your table variable must be of a numeric type or `logical`.

When you specify the color variable, MATLAB updates the `ColorData` property values. Also, the `ColorMethod` property changes to `'mean'`, unless you previously specified a different value.

Note: This property is ignored when using matrix data or when the `ColorMethod` property is set to `'count'`.

Example: `h = heatmap(__,'ColorVariable','Temperature')`

Example: `h.ColorVariable = 'Temperature'`

`ColorMethod` — Method to calculate color data

`'count'` | `'mean'` | `'median'` | `'sum'` | `'none'`

Method to calculate the color data values (stored in `ColorData`), specified as `'count'`, `'mean'`, `'median'`, `'sum'`, or `'none'`.

If you do not want to use a third variable from the table for the color data, then specify the method in this table.

Method	Description
`'count'`	Count the number of times each pair of x and y values appears in the source table. This option does not use the `ColorVariable` property and is the default value when you do not specify the `ColorVariable` parameter.

If you want to use a third variable from the table for the color data, then set the `ColorVariable` property to the variable you want and specify the `ColorMethod` property as one of the methods listed in this table. For each pair of x and y values, the methods use the corresponding values in the `ColorVariable` column of the source table to calculate the data.

Method	Description
`'mean'`	Calculate the average value. This value is the default value when you specify the `ColorVariable` property.

Method	Description
`'median'`	Calculate the median value.
`'sum'`	Sum the values.
`'none'`	Use the value exactly. The table cannot contain more than one instance of each pair of *x* and *y* values.

If you want to compute your own matrix of aggregated data, use the `accumarray` function. Specify the matrix as input to the `heatmap` function.

Note: This property is ignored when using matrix data. The value appears as `'none'`.

Example: `h = heatmap(__,'ColorMethod','median')`

Example: `h.ColorMethod = 'median'`

Color

`ColorData` — Data to color each heatmap cell

matrix of numeric values

Data to color each heatmap cell, specified as a matrix of numeric values.

If you are using tabular data, you cannot set this property. The `ColorData` values automatically populate based on the table variable you select with the `ColorVariable` property.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`ColorScaling` — Mapping of color data to colormap colors

`'scaled'` (default) | `'scaledcolumns'` | `'scaledrows'` | `'log'`

Mapping of color data to colormap colors, specified as one of these values:

- `'scaled'` — Map values in the `ColorData` property that are less than or equal to the minimum color limit to the first color in the colormap. Map values greater than or equal to the maximum color limit to the last color. The `ColorLimits` property contains the color limit values.

- `'scaledcolumns'` — Normalize each column in the `ColorData` property to values between 0 and 1. Map the smallest value to the first color in the colormap and the largest value to the last color.
- `'scaledrows'` — Normalize each row in the `ColorData` property to values between 0 and 1. Map the smallest value to the first color in the colormap and the largest value to the last color.
- `'log'` — Calculate the log of each value in the `ColorData` property before mapping the values to colors in the colormap. Negative values appear as missing data. However, if all of the values are negative, then this option uses `-log(-value)`.

Note: When `ColorScaling` is set to `'scaledcolumns'` or `'scaledrows'`, the default tick labels on the colorbar range from 0 to 1. The smallest value within a column or row of the heatmap chart maps to 0 on the colorbar. The largest value within a column or row maps to 1 on the colorbar.

Example: `h = heatmap(__,'ColorScaling','scaledcolumns')`

Example: `h.ColorScaling = 'scaledcolumns'`

`ColorLimits` — Color limits

two-element vector

Color limits, specified as a two-element vector of the form `[min max]`. The color limits indicate the color data values that map to the first and last colors in the colormap.

Note: The default values of `min` and `max` reflect the range of your data after the `ColorScaling` option is applied.

Example: `h = heatmap(__,'ColorLimits',[0 10])`

Example: `h.ColorLimits = [0 10]`

`Colormap` — Colormap for coloring heatmap cells

predefined colormap name | `m`-by-3 array of RGB triplets

Colormap for coloring heatmap cells, specified as a predefined colormap name or an `m`-by-3 array of RGB (red, green, blue) triplets that define `m` individual colors. You can specify one of the predefined colormaps, or you can create a custom one.

- Predefined colormaps — Specify the colormap name in command form, such as `parula` or `summer`. For a full list of options, see `colormap`.
- Custom colormap — Specify an `m`-by-3 array of RGB triplets.

Example: `h = heatmap(__,'Colormap',summer)`

Example: `h.Colormap = parula`

Title and Labels

`Title` — Chart title

string | character vector | `''`

Chart title, specified as a string, character vector, or `''` for no title. For tabular data, the default chart has an autogenerated title.

Example: `h = heatmap(__,'Title','My Title Text')`

Example: `h.Title = 'My Title Text'`

`XLabel` — Label for *x*-axis

string | character vector | `''`

Label for the *x*-axis, specified as a string, character vector, or `''` for no label. For tabular data, the default chart has an autogenerated label.

Example: `h = heatmap(__,'XLabel','My Label')`

Example: `h.XLabel = 'My Label'`

`YLabel` — Label for *y*-axis

string | character vector | `''`

Label for the *y*-axis, specified as a string, character vector, or `''` for no label. For tabular data, the default chart has an autogenerated label.

Example: `h = heatmap(__,'YLabel','My Label')`

Example: `h.YLabel = 'My Label'`

`CellLabelColor` — Text color for data labels

`'auto'` (default) | color name | RGB triplet | `'none'`

Text color for data labels, specified as `'auto'`, a color name, an RGB triplet, or `'none'`. The default value of `'auto'` chooses an appropriate text color, depending on the color of each heatmap cell.

To customize the color, specify one of the predefined long or short color names listed in the table or specify an RGB triplet. If you do not want the labels to display, specify `'none'`.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `h = heatmap(__,'CellLabelColor','blue')`

Example: `h.CellLabelColor = 'blue'`

`CellLabelFormat` — Format for data labels

`'%0.4g'` (default) | character vector of format options

Format for data labels, specified as a character vector of format options.

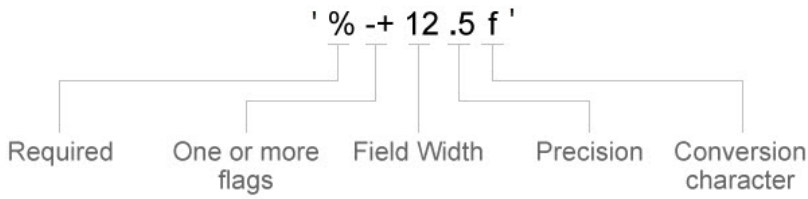

Most elements of the character vector are optional, except the percent sign and conversion character. Construct the character vector in this order:

- One or more flags — Options. For example, add a plus sign before positive values. For a full list of options, see the table of Optional Flags.
- Field width — Minimum number of characters to print in the tick label. Specify the field width as an integer value. If the number of significant digits in the tick value is smaller than the field width, then the label is padded with spaces.
- Precision — Number of digits to the right of the decimal point or the number of significant digits, depending on the conversion character. Specify the precision as an integer value.
- Conversion character — Value type. For a full list of options, see the table of Conversion Characters. If you specify a conversion that does not fit the data, then MATLAB overrides the specified conversion, and uses `%e`.

Also, you can specify literal text at the beginning or end of the format. To print a single quotation mark, use `''`. To print a percent character, use `%%`.

Example: `h.CellLabelFormat = '%.2f'` displays the values using fixed-point notation with two decimal places.

Example: `h.CellLabelFormat ='$%.2f'` displays a dollar sign before each value.

Example: `h.CellLabelFormat = '%.2f lbs'` displays `lbs` after each value.

Optional Flags

Identifier	Description	Example of Numeric Format
`,`	Display commas every three digits, such as `'1,000'`.	`'%,4.4g'`
`+`	Print the sign character (+) for positive values, such as `'+100'`.	`'%+4.4g'`
`0`	Pad the field width with leading zeros instead of spaces, such as `'0100'`.	`'%04.4g'`
`–`	Left justify, which pads the end of the value with spaces instead of the beginning. For example, if the field	`'%-4.4g'`

Identifier	Description	Example of Numeric Format
	width is 4, then this flag formats the label as `'100 '` instead of `' 100'`.	
#	For the `%f`, `%e`, and `%g` conversion characters, print the decimal point even when the precision is 0, such as `'100.'`. For `%g`, do not remove trailing zeros.	`'%#4.4g'`

Conversion Characters

Identifier	Description	Example
d or i	Signed integer with base 10. The precision value indicates the number of significant digits.	`'%.4d'` displays π as 0003.
f	Fixed-point notation. The precision value indicates the number of decimal places.	`'%.4f'` displays π as 3.1416.
e	Exponential notation. The precision value indicates the number of decimal places.	`'%.4e'` displays π as 3.1416×10^0.
g	The more compact version of e or f, with no trailing zeros. The precision value indicates the maximum number of decimal places.	`'%.4g'` displays π as 3.1416.

`MissingDataColor` — Color for cells with no data value

`[0.1500 0.1500 0.1500]` (default) | color name | RGB triplet

Color for cells with no data value, specified as a color name or an RGB triplet.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `h = heatmap(__,'MissingDataColor',[0.8 0.8 0.8])`

Example: `h.MissingDataColor = [0.8 0.8 0.8]`

`MissingDataLabel` — Label for missing data icon

`'NaN'` (default) | character vector

Label for missing data icon that displays below the colorbar, specified as a character vector. If you do not want a label to display, use an empty character vector `''`.

Example: `h = heatmap(__,'MissingDataLabel','No data')`

Example: `h.MissingDataLabel = 'No data'`

Appearance

`ColorbarVisible` — Display of colorbar

`'on'` (default) | `'off'`

Display of colorbar, specified as `'on'` or `'off'`.

Example: `h = heatmap(__,'ColorbarVisible','off')`

Example: `h.ColorbarVisible = 'off'`

`GridVisible` — Display of grid lines

`'on'` (default) | `'off'`

Display of grid lines, specified as `'on'` or `'off'`.

Example: `h = heatmap(__,'GridVisible','off')`

Example: `h.GridVisible = 'off'`

`FontSize` — Font size

`10` points (default) | scalar numeric value

Font size used for the title, axis labels, and cell labels, specified as a scalar value. The title and axis labels use a slightly larger font size (scaled up by 10%). If there is not enough room to display the text within each cell, then the text might use a smaller font size or the text might not appear.

Example: `h = heatmap(__,'FontSize',12)`

Example: `h.FontSize = 12`

`FontName` — Font name

`'Helvetica'` (default) | system supported font name

Font name, specified as a system supported font name.

Example: `h = heatmap(__,'FontName','Cambria')`

Example: `h.FontName = 'Cambria'`

`FontColor` — Text color for title, axis labels, and tick labels

`[0.1500 0.1500 0.1500]` (default) | color name | RGB triplet

Text color for title, axis labels, and tick labels, specified as a color name or an RGB triplet.

Example: `h = heatmap(__,'FontColor','blue')`

Example: `h.FontColor = 'blue'`

`OuterPosition` — Size and location

`[0 0 1 1]` (default) | four-element vector of the form `[left bottom width height]`

Size and location of the heatmap within the parent container (typically a figure, panel, or tab), specified as a four-element vector of the form `[left bottom width height]`.

- The `left` and `bottom` elements define the distance from the lower left corner of the container to the lower left corner of the heatmap.
- The `width` and `height` elements are the heatmap dimensions, which include the heatmap cells plus a margin for the surrounding text and colorbar.

The default value of `[0 0 1 1]` includes the whole interior of the container.

By default, the values are normalized to the container. To change the units, set the `Units` property.

`Units` — Position units
`'normalized'` (default) | `'inches'` | `'centimeters'` | `'points'` | `'pixels'` | `'characters'`

Position units, specified as one of these values.

Units	Description
`'normalized'` (default)	Normalized with respect to the container, which is typically the figure or a panel. The lower left corner of the container maps to `(0,0)`, and the upper right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default uicontrol font of the graphics root object: • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Typography points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

When specifying the units as a name-value pair during object creation, you must set the `Units` property before specifying the properties that you want to use these units, such as `OuterPosition`.

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the heatmap.
- `'off'` — Hide the heatmap without deleting it. You still can access the properties of an invisible `HeatmapChart` object.

Parent and Identifiers

`Parent` — Parent container

figure object | panel object | tab object

Parent container, specified as a figure, panel, or tab object.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of `HeatmapChart` object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. To temporarily hide the handle during the execution of that function, set the `HandleVisibility` to `'off'`.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles, regardless of their `HandleVisibility` property setting.

See Also

See Also

`heatmap`

Topics

"Access Property Values"

head

Get top rows of table, timetable, or tall array

Syntax

```
B = head(A)
B = head(A,k)
```

Description

`B = head(A)` returns the first eight rows of table or timetable `A`.

`B = head(A,k)` returns the first `k` rows of `A`.

Examples

Preview Table

Create a table that contains 100 rows and five variables.

```
load patients
T = table(LastName,Gender,Age,Height,Weight);
size(T)
```

```
ans =

   100     5
```

Preview the first eight rows.

```
T2 = head(T)
```

```
T2 = 8×5 table
     LastName      Gender     Age    Height    Weight
    __________    ________    ___    ______    ______

    'Smith'       'Male'      38     71        176
```

```
    'Johnson'     'Male'      43     69        163
    'Williams'    'Female'    38     64        131
    'Jones'       'Female'    40     67        133
    'Brown'       'Female'    49     64        119
    'Davis'       'Female'    46     68        142
    'Miller'      'Female'    33     64        142
    'Wilson'      'Male'      40     68        180
```

Preview Contents of Tall Table

Create a tall table and preview the first few rows of data.

Create a tall table for the `airlinesmall.csv` data set. Select a subset of the variables to work with. Use `head` to extract the first few rows of data.

```
varnames = {'Year','Month','ArrDelay','DepDelay','UniqueCarrier'};
ds = datastore('airlinesmall.csv','TreatAsMissing','NA',...
    'SelectedVariableNames',varnames);
T = tall(ds)
```

```
T =

  M×5 tall table

    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    1987    10        8          12          'PS'
    1987    10        8           1          'PS'
    1987    10       21          20          'PS'
    1987    10       13          12          'PS'
    1987    10        4          -1          'PS'
    1987    10       59          63          'PS'
    1987    10        3          -2          'PS'
    1987    10       11          -1          'PS'
    :       :        :           :           :
    :       :        :           :           :
```

```
tt = head(T)
```

```
tt =

  8×5 tall table
```

```
    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    1987    10        8          12          'PS'
    1987    10        8           1          'PS'
    1987    10       21          20          'PS'
    1987    10       13          12          'PS'
    1987    10        4          -1          'PS'
    1987    10       59          63          'PS'
    1987    10        3          -2          'PS'
    1987    10       11          -1          'PS'
```

Collect the results into memory to view the data.

```
t8 = gather(tt)
```

```
Evaluating tall expression using the Local MATLAB Session:

Evaluation completed in 0 sec

t8 = 8×5 table
    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    1987    10        8          12          'PS'
    1987    10        8           1          'PS'
    1987    10       21          20          'PS'
    1987    10       13          12          'PS'
    1987    10        4          -1          'PS'
    1987    10       59          63          'PS'
    1987    10        3          -2          'PS'
    1987    10       11          -1          'PS'
```

Retrieve Specified Number of Rows in Tall Array

Preview the first 20 rows of data in a tall table.

Create a tall table for the `airlinesmall.csv` data set. Select a subset of the variables to work with, and treat `'NA'` values as missing data so that `datastore` replaces them with `NaN` values. Use `head` to view the first 20 rows of data.

```
varnames = {'Year','Month','ArrDelay','DepDelay','UniqueCarrier'};
```

```
ds = datastore('airlinesmall.csv','TreatAsMissing','NA',...
    'SelectedVariableNames',varnames);
T = tall(ds)
```

```
T =

  M×5 tall table

    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    1987    10        8          12          'PS'
    1987    10        8           1          'PS'
    1987    10       21          20          'PS'
    1987    10       13          12          'PS'
    1987    10        4          -1          'PS'
    1987    10       59          63          'PS'
    1987    10        3          -2          'PS'
    1987    10       11          -1          'PS'
    :       :        :           :           :
    :       :        :           :           :
```

```
tt = head(T,20)
```

```
tt =

  20×5 tall table

    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    1987    10        8          12          'PS'
    1987    10        8           1          'PS'
    1987    10       21          20          'PS'
    1987    10       13          12          'PS'
    1987    10        4          -1          'PS'
    1987    10       59          63          'PS'
    1987    10        3          -2          'PS'
    1987    10       11          -1          'PS'
    :       :        :           :           :
    :       :        :           :           :
```

Collect the results into memory to view the data.

```
t20 = gather(tt)
```

```
Evaluating tall expression using the Local MATLAB Session:

Evaluation completed in 0 sec

t20 = 20×5 table
    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    1987    10         8          12          'PS'
    1987    10         8           1          'PS'
    1987    10        21          20          'PS'
    1987    10        13          12          'PS'
    1987    10         4          -1          'PS'
    1987    10        59          63          'PS'
    1987    10         3          -2          'PS'
    1987    10        11          -1          'PS'
    1987    10         3           3          'PS'
    1987    10         2           1          'PS'
    1987    10        16          15          'PS'
    1987    10         3           9          'PS'
    1987    10        39          15          'PS'
    1987    10        57          32          'TW'
    1987    10         0          -3          'TW'
    1987    10       -14           0          'TW'
    1987    10        15          11          'TW'
    1987    10         8          15          'TW'
    1987    10        11           7          'TW'
    1987    10         3          -1          'TW'
```

Input Arguments

A — Input array

table | timetable

Input array, specified as a table or timetable.

Data Types: `table` | `timetable`

k — Number of rows to extract

scalar

Number of rows to extract, specified as a positive scalar integer. If A has fewer than k rows, then head returns all of A.

Output Arguments

B — Requested rows
table | timetable

Requested rows, returned as a table or timetable. The data type of B is the same as A.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

You can use head and tail with tall arrays of any valid underlying data type (single, double, int8, datetime, table, and so on).

If you are unsure whether the result returned by gather(A) will fit in memory, then use gather(head(A)) or gather(tail(A)). These commands still fully evaluate the tall array A, but only return a small subset of the result in memory.

See Also

See Also
gather | table | tail | tall | timetable | topkrows

Topics
"Index and View Tall Array Elements"

Introduced in R2016b

height

Number of table rows

Syntax

```
H = height(T)
```

Description

`H = height(T)` returns the number of rows in the table, `T`.

`height(T)` is equivalent to `size(T,1)`.

Examples

Number of Table Rows

Create a table, `T`.

```
LastName = {'Smith';'Johnson';'Williams';'Jones';'Brown'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];

T = table(Age,Height,Weight,BloodPressure,'RowNames',LastName)
```

```
T = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Smith       38     71        176       124      93
    Johnson     43     69        163       109      77
    Williams    38     64        131       125      83
    Jones       40     67        133       117      75
    Brown       49     64        119       122      80
```

Find the number of rows in table `T`.

```
H = height(T)
```

```
H = 5
```

`T` contains five rows; `height` does not count the variable names.

Input Arguments

`T` — Input table

table

Input table, specified as a table.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`numel` | `size` | `width`

Introduced in R2013b

help

Help for functions in Command Window

Syntax

```
help
help name
```

Description

`help` lists all primary help topics in the Command Window. Each main help topic corresponds to a folder name on the MATLAB search path.

`help name` displays the help text for the functionality specified by `name`, such as a function, method, class, toolbox or variable.

Input Arguments

name

Operator symbol (such as +) or name of a function, class, method, package, toolbox folder, variable, or other functionality, specified as a character vector.

Some classes and other packaged items require that you specify the package name. Events, properties, and some methods require that you specify the class name. Separate the components of the name with periods, such as:

```
help className.name
help packageName.name
help packageName.className.name
```

If `name` is a variable, `help` displays the help text for the class of that variable.

```
help name
```

To get help for the methods of the `name` class, specify

```
help name.methodname
```

If `name` is overloaded, that is, appears in multiple folders on the search path, `help` displays the help text for the first instance of `name` found on the search path, and displays a hyperlinked list of the overloaded functions and their folders.

When `name` specifies the name or partial path of a toolbox folder:

- If the folder contains a nonempty `Contents.m` file, the `help` function displays the file. `Contents.m` contains a list of MATLAB program files in the folder and their descriptions. If `Contents.m` exists, but is empty, MATLAB responds with `No help found for` *`name`*.
- If the folder does not contain a `Contents.m` file, the `help` function lists the first line of help text for each program file in the folder.
- If `name` is the name of both a function and a toolbox, `help` displays the associated text for both the toolbox and the function.

Examples

Functions and Overloaded Methods

Display help for the MATLAB `close` function.

```
help close
```

Because `close` refers to the name of a function and to the name of several methods, the help text includes hyperlinks to the overloaded methods.

Request help for the Database Toolbox `close` method.

```
help database.close
```

Package, Class, and Method Help

Display help for the `containers` package, `Map` class, and the `isKey` method.

```
help containers
help containers.Map
help containers.Map.isKey
```

Not all packages, classes, and associated methods or events require complete specification. For example, display the help for the `throwAsCaller` method of the `MException` class.

```
help throwAsCaller
```

Variable Help

Display help for a variable `t = datetime`.

```
t = datetime
help t
```

Because `t` is of type `datetime`, the `help` function displays help text for the `datetime` class.

Request help for `Day`, a method of the `datetime` class.

```
help t.Day
```

Functions in Folder

List all of the functions in the folder *`matlabroot`*`/toolbox/matlab/general` by specifying a partial path.

```
help general
```

Tips

- Some help text displays the names of functions in uppercase characters to make them stand out from the rest of the text. When typing these function names, use lowercase. For function names that appear in mixed case (such as `javaObject`), type the names as shown.
- To prevent long descriptions from scrolling off the screen before you have time to read them, enter `more on`, and then enter the `help` statement.
- Some classes require that you specify the package name to display the help text. To identify the package name, create an instance of the class, and then call `class(obj)`.

Alternatives

View more extensive help using the `doc` command or the Function Browser. To open the Function Browser, click its icon, .

See Also

`class` | `dbtype` | `doc` | `lookfor` | `more` | `path` | `what` | `which` | `whos`

Topics

"Ways to Get Function Help"
"Add Help for Your Program"

Introduced before R2006a

helpbrowser

Open Help browser to access online documentation

Note: `helpbrowser` will be removed in a future release. Use `doc` instead.

Syntax

```
helpbrowser
```

Description

`helpbrowser` displays the Help browser, open to its default startup page.

See Also

`doc` | `help`

Topics

"Ways to Get Function Help"

Introduced before R2006a

helpdesk

Open Help browser

Note: `helpdesk` will be removed in a future release. Use `doc` instead.

Syntax

```
helpdesk
```

Description

`helpdesk` opens the Help browser to the default startup page. In previous releases, `helpdesk` displayed the Help Desk, which was the precursor to the Help browser.

See Also

`doc`

Introduced before R2006a

helpdlg

Create help dialog box

Syntax

```
helpdlg
helpdlg(helpstring)
helpdlg(helpstring,dlgname)
h = helpdlg(...)
```

Description

`helpdlg` creates a nonmodal help dialog box or brings the named help dialog box to the front.

Note A nonmodal dialog box enables the user to interact with other windows before responding. For more information, see `WindowStyle` in the MATLAB Figure Properties.

`helpdlg` displays a dialog box named `'Help Dialog'` containing the message, `'This is the default help.'`

`helpdlg(helpstring)` displays a dialog box named `'Help Dialog'` containing the message specified by `helpstring`.

`helpdlg(helpstring,dlgname)` displays a dialog box entitled `dlgname` containing the message specified by `helpstring`.

`h = helpdlg(...)` returns the handle of the dialog box.

Examples

The statement

```
helpdlg('Choose 10 points from the figure',...
```

```
        'Point Selection');
```

displays this dialog box:

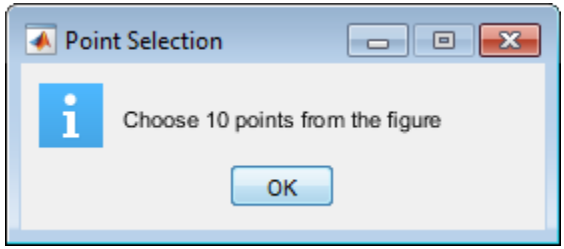

Tips

MATLAB wraps the text in `'helpstring'` to fit the width of the dialog box. The dialog box remains on your screen until you press the **OK** button or the **Enter** key. After either of these actions, the help dialog box disappears.

See Also

`dialog` | `errordlg` | `inputdlg` | `listdlg` | `msgbox` | `questdlg` | `warndlg` | `figure` | `uiwait` | `uiresume`

Introduced before R2006a

helpwin

Provide access to help comments for all functions

Note: `helpwin` will be removed in a future release. Use `doc` instead.

Syntax

```
helpwin
helpwin topic
```

Description

`helpwin` lists topics for groups of functions in the MATLAB Help browser. It shows brief descriptions of the topics and provides links to display help comments for the functions. You cannot follow links in the `helpwin` list of functions if the MATLAB software is busy (for example, running a program).

`helpwin topic` displays help information for the topic. If `topic` is a folder, it displays all functions in the folder. If `topic` is a function, `helpwin` displays help for that function. From the page, you can access a list of folders (**Default Topics** link) as well as the reference page help for the function (**Go to online doc** link). You cannot follow links in the `helpwin` list of functions if MATLAB is busy (for example, running a program).

Examples

Typing

```
helpwin datafun
```

displays the functions in the `datafun` folder and a brief description of each.

Typing

```
helpwin fft
```

displays the help for the `fft` function.

See Also

`doc` | `help`

Introduced before R2006a

hess

Hessenberg form of matrix

Syntax

```
H = hess(A)
[P,H] = hess(A)
[AA,BB,Q,Z] = hess(A,B)
```

Description

`H = hess(A)` finds `H`, the Hessenberg form of matrix `A`.

`[P,H] = hess(A)` produces a Hessenberg matrix `H` and a unitary matrix `P` so that `A = P*H*P'` and `P'*P = eye(size(A))`.

`[AA,BB,Q,Z] = hess(A,B)` for square matrices `A` and `B`, produces an upper Hessenberg matrix `AA`, an upper triangular matrix `BB`, and unitary matrices `Q` and `Z` such that `Q*A*Z = AA` and `Q*B*Z = BB`.

Examples

`H` is a 3-by-3 eigenvalue test matrix:

```
H =
   -149    -50   -154
    537    180    546
    -27     -9    -25
```

Its Hessenberg form introduces a single zero in the (3,1) position:

```
hess(H) =
   -149.0000    42.2037   -156.3165
   -537.6783   152.5511   -554.9272
           0     0.0728      2.4489
```

Definitions

Hessenberg Matrix

A Hessenberg matrix contains zeros below the first subdiagonal. If the matrix is symmetric or Hermitian, then the form is tridiagonal. This matrix has the same eigenvalues as the original, but less computation is needed to reveal them.

See Also

`eig` | `qz` | `schur`

Introduced before R2006a

matlab.mixin.Heterogeneous class

Package: matlab.mixin

Superclass for heterogeneous array formation

Description

`matlab.mixin.Heterogeneous` is an abstract class that provides support for the formation of heterogeneous arrays. A heterogeneous array is an array of objects that differ in their specific class, but are all derived from or are instances of a root class. The root class derives directly from `matlab.mixin.Heterogeneous`.

Heterogeneous Hierarchy

Use `matlab.mixin.Heterogeneous` to define hierarchies of classes whose instances you can combine into heterogeneous arrays.

The following class definition enables the formation of heterogeneous arrays that combine instances of any classes derived from `HierarchyRoot`.

```
classdef HierarchyRoot < matlab.mixin.Heterogeneous
   % HierarchyRoot is a direct subclass of
   % matlab.mixin.Heterogeneous
   % HierarchyRoot is the root of this heterogeneous hierarchy
end
```

Deriving the `HierarchyRoot` class directly from `matlab.mixin.Heterogeneous` enables the `HierarchyRoot` class to become the root of a hierarchy of classes. You can combine instances of the members of this hierarchy into a heterogeneous array. Only instances of classes derived from the same root class can combine to form a valid heterogeneous array.

Class of a Heterogeneous Array

The class of a heterogeneous array is always the class of the most specific superclass common to all objects in the array. For example, suppose you define the following class hierarchy:

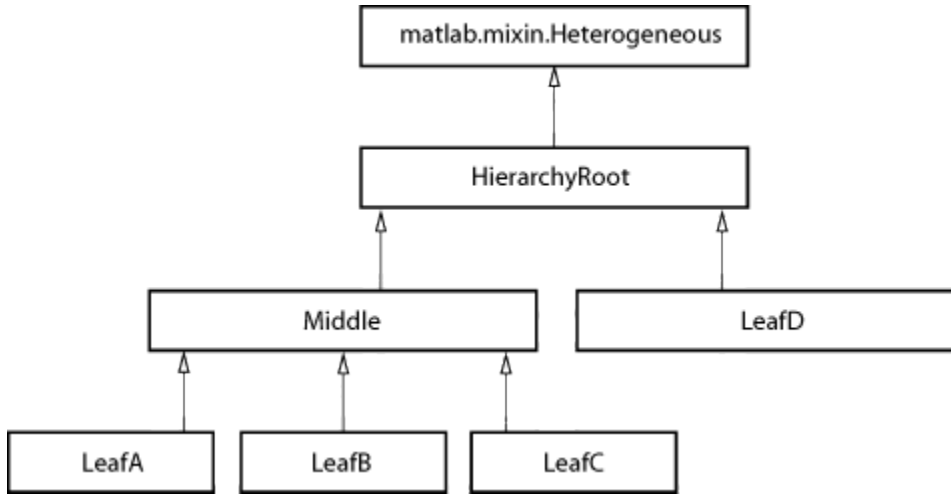

Forming an array (`harray`) of an instance of `LeafA` with an instance of `LeafB` creates an array of class `Middle`:

```
harray = [LeafA,LeafB];
class(harray)
```

```
ans =
Middle
```

Forming an array (`harray`) of an instance of `LeafC` with an instance of `LeafD` creates an array of class `HierarchyRoot`:

```
harray = [LeafC,LeafD];
class(harray)
```

```
ans =
HierarchyRoot
```

Forming an array (`harray`) of an instance of `LeafA` with an other instance of `LeafA` creates a homogeneous array of class `LeafA`:

```
harray = [LeafA,LeafA];
class(harray)
```

```
ans =
LeafA
```

Restrictions on Heterogeneous Array Formation

You can form heterogeneous arrays only with objects that are derived from the same hierarchy root (that is, the `HierarchyRoot` class in the hierarchy shown previously).

You can form heterogeneous arrays with objects that derive from multiple superclasses, but only one branch in the hierarchy can define a heterogeneous root.

Forming a Heterogeneous Array

Heterogeneous arrays are the result of operations that produces arrays containing instances of two or more classes from the heterogeneous hierarchy. Usually, concatenation or indexed assignment form these arrays. For example, these statements form `harray` using indexed assignment:

```
harray(1) = LeafA;
harray(2) = LeafC;
class(harray)

ans =
Middle
```

Growing the Array Can Change Its Class

Assigning new objects into an array containing objects derived from `matlab.mixin.Heterogeneous` can change the class of the array. For example, given a homogeneous array containing objects only of the `LeafA` class:

```
harray = [LeafA,LeafA,LeafA];
class(harray)

ans =
LeafA
```

Adding an object of another class derived from the same root to `harray` converts the array's class to the most specific superclass:

```
harray(4) = LeafB;
class(harray)

ans =
Middle
```

Method Dispatching

When MATLAB invokes a method for which the dominant argument is a heterogeneous array, the method:

- Must be defined for the class of the heterogeneous array, either directly by the class of the array or inherited from a superclass.
- Must be `Sealed = true` (cannot be overridden by a subclass). If you need to seal an inherited method, see Sealing Inherited Methods.

The class of the heterogeneous array determines which class method executes for any given method invocation, as is the case with a homogeneous array. MATLAB does not consider the class of individual elements in the array when dispatching to methods.

Sealing Inherited Methods

The requirement that methods called on a heterogeneous array be `Sealed = true` ensures correct and predictable behavior with all array elements.

You must override methods that are inherited from outside the heterogeneous hierarchy if these methods are not `Sealed = true` and you want to call these methods on heterogeneous arrays.

For example, suppose you define a heterogeneous array by subclassing matlab.mixin.SetGet, in addition to `matlab.mixin.Heterogeneous`. Override the `set` method to call the `matlab.mixin.SetGet` superclass method as required by your class design:

```
classdef HeterogeneousSetGet < matlab.mixin.SetGet & matlab.mixin.Heterogeneous
    properties
        P
    end
    methods(Sealed)
        function varargout = set(obj,varargin)
            [varargout{1:nargout}] = set@matlab.mixin.SetGet(obj,varargin{:});
        end
    end
end
```

Method implementations can take advantage of the fact that, given a heterogeneous array `harray`, and a scalar index `n`, the expression

```
harray(n)
```

is not a heterogeneous array. Therefore, when invoking a method on a single element of a heterogeneous array, special requirements for heterogeneous arrays do not apply.

Defining the Default Object

When working with object arrays (both heterogeneous and homogeneous), MATLAB creates default objects to fill in missing array elements by calling the class constructor with no arguments. Filling in missing array elements becomes necessary in cases such as:

- Indexed assignment creates an array with gaps. For example, if `harray` is not previously defined:

  ```
  harray(5) = LeafA;
  ```

- Loading a heterogeneous array from a MAT-file when MATLAB cannot find the class definition of a specific object.

The `matlab.mixin.Heterogeneous` class provides a default implementation of a method called `getDefaultScalarElement`. This method returns an instance of the root class of the heterogeneous hierarchy, unless the root class is abstract.

If the root class is abstract or is not an appropriate default object for the classes in the heterogeneous hierarchy, you can override the `getDefaultScalarElement` method to return an instance of a class derived from the root class.

Defining the getDefaultScalarElement Method

Specify the class of the default object by overriding the `matlab.mixin.Heterogeneous` method called `getDefaultScalarElement` in the root class of the heterogeneous hierarchy. You can override `getDefaultScalarElement` only in the root class (direct subclasses of `matlab.mixin.Heterogeneous`).

`getDefaultScalarElement` has the following signature:

```
methods (Static, Sealed, Access = protected)
   function default_object = getDefaultScalarElement
   ...
   end
end
```

The `getDefaultScalarElement` method must satisfy these criteria:

- Static — MATLAB calls this method without an object.
- Protected — MATLAB calls this method, object users do not.
- Sealed (not required) — Seal this method to ensure users of the heterogeneous hierarchy do not change the intended behavior of the class.
- It must return a scalar object
- It must pass the `isa` test for the root class, that is:

  ```
  (isa(getDefaultScalarElement,'HierarchyRoot')
  ```

  where *`HierarchyRoot`* is the name of the heterogeneous hierarchy root class. This means the default object can be an instance of any class derived from the root class.

Cannot Redefine Indexing or Concatenation

The use of heterogeneous arrays requires consistent indexing and concatenation behaviors. Therefore, subclasses of `matlab.mixin.Heterogeneous` cannot change their default indexed reference, indexed assignment, or concatenation behavior.

You cannot override the following methods in your subclasses:

- `cat`
- `horzcat`
- `vertcat`
- `subsref`
- `subsasgn`

In cases involving multiple inheritance in which your subclass inherits from superclasses in addition to `matlab.mixin.Heterogeneous`, the superclasses cannot define any of these methods.

Default Concatenation Behavior

Statements of the form:

```
a = [obj1,obj2,...];
```

create an array, `a`, containing the objects listed in brackets.

Concatenating `Heterogeneous` objects of the same specific class retains the class of the objects and does not form a heterogeneous array.

Concatenating `Heterogeneous` objects derived from the same root superclass, but that are of different specific classes, yields a heterogeneous array. MATLAB does not attempt to convert the class of any array members if all are part of the same root hierarchy.

Indexed Assignment Behavior

Statements of the form:

```
a(m:n) = [objm,...objn];
```

assign the right-hand side objects to the array elements (`m:n`), specified on the left side of the assignment.

Indexed assignment to a heterogeneous array can:

- Increase or decrease the size of the array
- Overwrite existing array elements
- Change property values of objects within the array
- Change the class of the array
- Change whether the array is heterogeneous

Indexed Reference Behavior

Statements of the form:

```
a = harray(m:n);
```

assign the elements of `harray` referenced by indices `m:n`, to array `a`.

Indexed reference on a heterogeneous array returns a sub-range of the original array. Depending on the specific elements within that sub-range (`m:n`), the result might have a different class than the original array, and might not be heterogeneous.

Converting Nonmember Objects

If you attempt to form a heterogeneous array with objects that are not derived from the same root class, MATLAB calls the `convertObject` method, if it exists, to convert objects to the dominant class. Implementing a `convertObject` method enables the formation of heterogeneous arrays containing objects that are not part of the heterogeneous hierarchy.

When Is Conversion Necessary

Suppose there are two classes A and B, where B is not derived from `matlab.mixin.Heterogeneous`, or where A and B are derived from different root classes that are derived from `matlab.mixin.Heterogeneous`.

MATLAB attempts to call the `convertObject` method implemented by the root class of A in the following cases:

- The indexed assignment:

  ```
  A(k) = B
  ```

- Horizontal and vertical concatenations:

  ```
  [A,B] and [A;B]
  ```

Implement a `convertObject` method if you want to support conversion of objects whose class is not defined in your heterogeneous hierarchy. You do not need to implement this method if your class design does not require this conversion.

Implementing convertObject

Only the root class of the heterogeneous hierarchy can implement a `convertObject` method.

The `convertObject` method must have the following signature:

```
methods (Static, Sealed, Access = protected)
   function cobj = convertObject(DomClass,objToConvert)
   ...
   end
end
```

For indexed assignment `A(k) = B` and concatenation `[A,B]`:

- `DomClass` — Name of the class of the array A
- `objToConvert` — Object to be converted, B in this case
- `cobj` — Legal member of the heterogeneous hierarchy to which A belongs

You must implement `convertObject` to return a valid object of class A or MATLAB issues an error.

Handle Compatibility

The `matlab.mixin.Heterogeneous` class is handle compatible. It can be combined with either handle or value classes when defining a subclass using multiple superclasses. See "Handle Compatible Classes" for information on handle compatibility.

The `matlab.mixin.Heterogeneous` class is a value class. To learn how value classes affect copy operations, see Copying Objects in the MATLAB Programming Fundamentals documentation.

Methods

cat	Concatenation for heterogeneous arrays
getDefaultScalarElement	Return default object for heterogeneous array operations
horzcat	Horizontal concatenation for heterogeneous arrays
vertcat	Vertical concatenation for heterogeneous arrays

See Also

handle

Topics

Class Attributes
"Heterogeneous Arrays"
"Subclass Constructors"

Introduced in R2011a

cat

Class: matlab.mixin.Heterogeneous
Package: matlab.mixin

Concatenation for heterogeneous arrays

Syntax

```
C = cat(dim,A,B)
```

Description

`C = cat(dim,A,B)` concatenates objects `A` and `B` along the dimension `dim`. The class of object arrays `A` and `B` must be derived from the same root class of a `matlab.mixin.Heterogeneous` hierarchy.

- If `A` and `B` are of the same class, the class of the resulting array is unchanged.
- If `A` and `B` are of different subclasses of a common superclass that is derived from `matlab.mixin.Heterogeneous`, then the result is a heterogeneous array and the array's class is that of the most specific superclass shared by `A` and `B`.

The `cat` method is sealed in the class `matlab.mixin.Heterogeneous` and, therefore, you cannot override it in subclasses.

Input Arguments

`dim`

Scalar dimension along which to concatenate arrays

Default:

`A`

Object array derived from the same root subclass of `matlab.mixin.Heterogeneous` as `B`

B

Object array derived from the same root subclass of `matlab.mixin.Heterogeneous` as `A`

Output Arguments

C

Array resulting from the specified concatenation. The class of this array is that of the most specific superclass shared by `A` and `B`.

Attributes

`Sealed`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

matlab.mixin.Heterogeneous | `cat`

matlab.mixin.Heterogeneous.getDefaultScalarElement

Class: matlab.mixin.Heterogeneous
Package: matlab.mixin

Return default object for heterogeneous array operations

Syntax

```
defaultObject = getDefaultScalarElement
```

Description

`defaultObject = getDefaultScalarElement` returns the default object for a heterogeneous hierarchy. Override this method if the root class is abstract or is not an appropriate default object for the classes in the heterogeneous hierarchy. `getDefaultScalarElement` must return an instance of another member of the heterogeneous hierarchy.

The implementation of `getDefaultScalarElement` inherited from the `matlab.mixin.Heterogeneous` class returns an instance of the root class. If the root class is abstract, you must implement `getDefaultScalarElement` in the root class to return a default object. For more information, see "Root Class" on page 1-4847.

MATLAB calls the `getDefaultScalarElement` method when requiring a default object. For more information on heterogeneous arrays and default objects, see matlab.mixin.Heterogeneous.

Output Arguments

`defaultObject`

The default object for heterogeneous array operations.

Attributes

`Static`	`true`

`Access`	`Protected`
`Sealed`	`true` not required

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

This example describes a heterogeneous hierarchy with a root class (`FinancialObjects`) that is an abstract class and cannot, therefore, be used for the default object. The `FinancialObjects` class definition includes an override of the `getDefaultScalarElement` method which returns an instance of the `Assets` class as the default object.

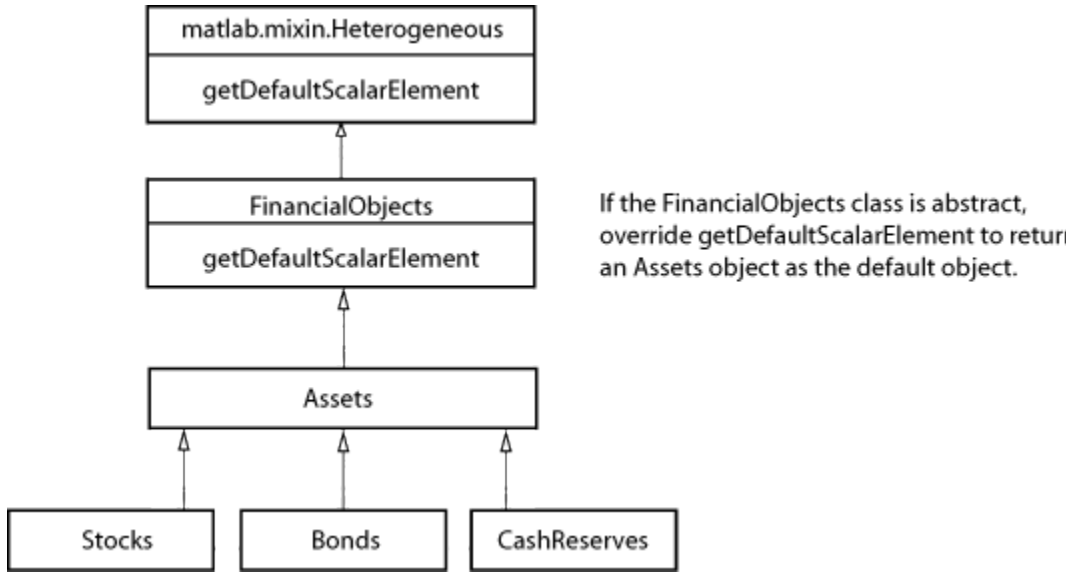

The root class can override the `getDefaultScalarElement` method that is defined in `matlab.mixin.Heterogeneous` class and return an `Assets` object as the default object.

```
classdef FinancialObjects < matlab.mixin.Heterogeneous
   methods (Abstract)
```

```
      val = determineCurrentValue(obj)
   end
   methods (Static, Sealed, Access = protected)
      function default_object = getDefaultScalarElement
         default_object = Assets;
      end
   end
end
```

Definitions

Root Class

Root class – The direct subclass of `matlab.mixin.Heterogeneous` that forms the root of a heterogeneous hierarchy. Classes of objects that you can combine into heterogeneous arrays must derive from this root class.

Tips

- Override `getDefaultScalarElement` only if the root class is not suitable as a default object.
- Override `getDefaultScalarElement` only in the root class of the heterogeneous hierarchy.
- `getDefaultScalarElement` must return a scalar object.
- `getDefaultScalarElement` must be a static method with protected access. While not required by MATLAB, you can seal this method to prevent overriding by other classes.
- MATLAB returns an error if the value returned by `getDefaultScalarElement` is not scalar or is not an instance of a class that is a valid member of the hierarchy.

See Also

matlab.mixin.Heterogeneous

horzcat

Class: matlab.mixin.Heterogeneous
Package: matlab.mixin

Horizontal concatenation for heterogeneous arrays

Syntax

```
C = horzcat(A1,A2,...)
```

Description

`C = horzcat(A1,A2,...)` concatenates the `matlab.mixin.Heterogeneous` objects `A1`, `A2`, and so on, to form the array `C`. All input arrays must have the same number of rows.

The class of object arrays `A1,A2,...` must be derived from the same root class of a `matlab.mixin.Heterogeneous` hierarchy.

MATLAB calls:

```
C = horzcat(A1,A2,...)
```

for the expressions:

```
C = [A1,A2,...]
C = [A1 A2 ...]
```

when `A1` is an array of `matlab.mixin.Heterogeneous` objects.

If all input arguments are of the same specific class, the class of the resulting array is unchanged. If all input arguments are of different subclasses of a common superclass that is derived from `matlab.mixin.Heterogeneous`, then the result is a heterogeneous array. The array's class is that of the most specific superclass shared by all input arguments.

If all input arguments are not members of the same heterogeneous hierarchy, MATLAB calls the `convertObjects` method, if defined by the dominant root class (the first argument or the left-most element in the concatenation if no other class is dominant).

The `horzcat` method is sealed in the class `matlab.mixin.Heterogeneous` and, therefore, you cannot override it in subclasses.

Input Arguments

A1

Object array of class `matlab.mixin.Heterogeneous`

A2

Object array of class `matlab.mixin.Heterogeneous`

Output Arguments

C

Array resulting from the specified concatenation. The class of this array is that of the most specific superclass shared by the input arguments.

Attributes

`Sealed`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

matlab.mixin.Heterogeneous | `horzcat`

vertcat

Class: matlab.mixin.Heterogeneous
Package: matlab.mixin

Vertical concatenation for heterogeneous arrays

Syntax

```
C = vertcat(A1,A2,...)
```

Description

`C = vertcat(A1,A2,...)` concatenates the `matlab.mixin.Heterogeneous` objects `A1`, `A2`, and so on, to form the array `C`. All input arrays must have the same number of columns.

The class of object arrays `A1,A2,...` must be derived from the same root class of a `matlab.mixin.Heterogeneous` hierarchy.

MATLAB calls:

```
C = vertcat(A1,A2,...)
```

for the expression:

```
C = [A1;A2;...]
```

when `A1` and `A2`, and so on are arrays of `matlab.mixin.Heterogeneous` objects.

If all input arguments are of the same specific class, the class of the resulting array is unchanged. If all input arguments are of different subclasses of a common superclass that is derived from `matlab.mixin.Heterogeneous`, then the result is a heterogeneous array. The array's class is that of the most specific superclass shared by all input arguments.

If all input arguments are not members of the same heterogeneous hierarchy, MATLAB calls the `convertObjects` method, if defined by the dominant root class (the first argument or the left-most element in the concatenation if no other class is dominant).

The `horzcat` method is sealed in the class `matlab.mixin.Heterogeneous` and, therefore, you cannot override it in subclasses.

Input Arguments

A1

Object array of class `matlab.mixin.Heterogeneous`

A2

Object array of class `matlab.mixin.Heterogeneous`

Output Arguments

C

Array resulting from the specified vertical concatenation. The class of this array is that of the most specific superclass shared by the input arguments.

Attributes

`Sealed`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

matlab.mixin.Heterogeneous | `vertcat`

hex2dec

Convert text representation of hexadecimal number to decimal number

Syntax

```
d = hex2dec('hex_value')
```

Description

`d = hex2dec('hex_value')` converts *`hex_value`* to its floating-point integer representation. The argument *`hex_value`* is a hexadecimal integer stored as text. If the value of *`hex_value`* is greater than the hexadecimal equivalent of the value returned by `flintmax`, then `hex2dec` might not return an exact conversion.

The input argument *`hex_value`* can be a character array, cell array of character vectors, or string array.

- If *`hex_value`* is a character array, each row is interpreted as a double-precision number, and `d` is returned as a column vector.
- If *`hex_value`* is a cell array of character vectors, each element is interpreted as a double-precision number, and `d` is returned as a column vector.
- If *`hex_value`* is a string array, each element is interpreted as a double-precision number, and `d` is returned as a numeric array with the same size as *`hex_value`*.

Examples

```
hex2dec('3ff')

ans =

        1023
```

For a character array `S`,

```
S =
```

```
0FF
2DE
123
hex2dec(S)

ans =

255
734
291
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input text must be specified as a character array. Cell arrays are not supported.

See Also

`dec2hex` | `format` | `hex2num` | `sprintf` | `bin2dec` | `base2dec` | `flintmax`

hex2num

Convert IEEE hexadecimal string to double-precision number

Syntax

```
n = hex2num(S)
```

Description

`n = hex2num(S)`, where `S` contains 16 characters representing a hexadecimal number, returns the IEEE double-precision floating-point number `n` that it represents. Fewer than 16 characters are padded on the right with zeros. `S` can be a character array, a cell array of character vectors, or a string array.

- If `S` is a character array, each row is interpreted as a double-precision number, and `n` is returned as a column vector.
- If `S` is a cell array of character vectors, each element is interpreted as a double-precision number, and `n` is returned as a column vector.
- If `S` is a string array, each element is interpreted as a double-precision number, and `n` is returned as a numeric array with the same size as `S`.

`NaN`s, infinities and denorms are handled correctly.

Examples

```
hex2num('400921fb54442d18')
```

returns `Pi`.

```
hex2num('bff')
```

returns

```
ans =

    -1
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input text must be specified as a character array. Cell arrays are not supported.
- For `n = hex2num(S)`, `size(S,2) <= length(num2hex(0))`.

See Also

`num2hex` | `hex2dec` | `sprintf` | `format`

Introduced before R2006a

hgexport

Export figure

Syntax

```
hgexport(fig,filename)
hgexport(fig,'-clipboard')
```

Description

`hgexport(fig,filename)` writes figure `fig` to the EPS file `filename`.

`hgexport(fig,'-clipboard')` writes figure `fig` to the Microsoft Windows clipboard. The format in which the figure is exported is determined by which renderer you use. The Painters renderer generates a metafile. The OpenGL renderer generate a bitmap.

Alternatives

Use the **File > Export Setup** dialog. Use **Edit > Copy Figure** to copy the figure's content to the system clipboard. For details, see "Customize Figure Interactively Before Saving" and "Copy Figure to Clipboard from Edit Menu".

See Also

`print`

Introduced before R2006a

hggroup

Create group object

Syntax

```
h = hggroup
h = hggroup(...,'PropertyName',propertyvalue,...)
h = hggroup(ax,...)
```

Properties

For a list of properties, see Group Properties.

Description

`h = hggroup` creates a `Group` object as a child of the current axes and returns its handle, `h`.

`h = hggroup(...,'PropertyName',propertyvalue,...)` creates a `Group` object with the property values specified in the argument list.

`h = hggroup(ax,...)` creates the `Group` object in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

A `Group` object can be the parent of any axes, as well as other `Group` objects. Use `Group` objects to form a group of child objects that can be treated as a single object.

Examples

Plot random data and parented the lines to the `Group` object.

```
hg = hggroup;
plot(randn(5),randn(5),'Parent',hg)
```

Instance Diagram for This Example

The following diagram shows the object hierarchy created by this example.

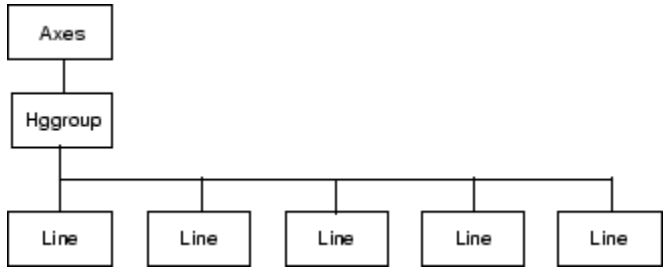

See Also

`hgtransform`

Topics

"Create Object Groups"

Introduced before R2006a

Group Properties

Control `Group` object appearance and behavior

Description

`Group` object properties control the behavior of `Group` objects. By changing property values, you can modify certain aspects of the `Group` object.

Starting in R2014b, you can use dot notation to query and set properties.

```
g = hggroup;
c = g.Children;
g.Visible = 'off';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Visibility

`Visible` — Visibility
`'on'` (default) | `'off'`

Visibility, specified as one of these values:

- `'on'` — Display all objects in the `Group` object.
- `'off'` — Hide all objects in the `Group` object. You still can access the properties of invisible `Group` objects. Setting the `Visible` property for the `Group` object does not change the `Visible` property for objects in the `Group` object.

`EraseMode` — (removed) Technique to draw and erase objects
`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'hggroup'`

This property is read-only.

Type of graphics object, returned as `'hggroup'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with

a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.
- `'children'` — Include only children of the object as separate items in the legend.

For example, exclude a `Stem` object from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
```

```
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array | array of graphics objects

Children, returned as an array of graphics objects. Use this property to view a list of the children or to reorder the children by setting the property to a permutation of itself.

You cannot add or remove children using the `Children` property. To add a child to this list, set the `Parent` property of the child graphics object to the `Group` object.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Children that can capture mouse clicks

`'visible'` (default) | `'none'`

Children that can capture mouse clicks, specified as one of these values:

- `'visible'` — Any child object can capture a mouse click, depending on the `PickableParts` property value of the child.
- `'none'` — No child objects can capture mouse clicks, regardless of the `PickableParts` property value of the child.

`HitTest` — Response to mouse clicks captured by children

`'on'` (default) | `'off'`

Response to mouse clicks captured by children, specified one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of `Group` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Do not trigger the callbacks of the `Group` object. Instead, trigger the callbacks for the nearest ancestor that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

A `Group` object cannot capture mouse clicks. However, if you click a child of the `Group` object and if the child has a `HitTest` property set to `'off'`, then the child passes the click to the `Group` object.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Group` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Group` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`hggroup`

Topics
"Access Property Values"
"Graphics Object Properties"

hgload

Load graphics object hierarchy from file

Syntax

```
h = hgload('filename')
[h,old_prop_values] = hgload(...,property_structure)
```

Description

Note: `hgload` is not recommended. Use `openfig` instead.

`h = hgload('filename')` loads graphics object hierarchy from the FIG-file specified by `filename` and returns handles to the top-level objects. If `filename` contains no extension, then MATLAB adds the `.fig` extension.

`[h,old_prop_values] = hgload(...,property_structure)` overrides the properties on the top-level objects stored in the FIG-file with the values in `property_structure`, and returns their previous values in `old_prop_values`.

`property_structure` must be a structure having field names that correspond to property names and values that are the new property values.

`old_prop_values` is a cell array equal in length to `h`, containing the old values of the overridden properties for each object. Each cell contains a structure having field names that are property names, each of which contains the original value of each property that has been changed. Any property specified in `property_structure` that is not a property of a top-level object in the FIG-file is not included in `old_prop_values`.

Nonserializable objects (such as the default toolbars and the default menus) are not saved because they are created when the figure is created. This allows revisions of the default menus and toolbars to occur without affecting existing FIG-files.

Alternatives

Use the **File > Open** on the figure window menu to access figure files with the **Open** dialog.

See Also

`hgsave` | `open`

Introduced before R2006a

hgsave

Save graphics object hierarchy to file

Syntax

```
hgsave('filename')
hgsave(h,'filename')
hgsave(...,'-v6')
hgsave(...,'-v7.3')
```

Description

Note: `hgsave` is not recommended. Use `savefig` instead.

`hgsave('filename')` saves the current figure to a file named `filename`.

`hgsave(h,'filename')` saves the objects identified by the array of handles `h` to a file named `filename`. If you do not specify an extension for `filename`, then the extension `.fig` is appended. If `h` is a vector, none of the handles in `h` may be ancestors or descendents of any other handles in `h`.

`hgsave(...,'-v6')` saves the FIG-file in a format that can be loaded by versions prior to MATLAB 7.

`hgsave(...,'-v7.3')` saves the FIG-file in a format that can be loaded only by MATLAB versions 7.3 and above. This format, based on HDF5 files, is intended for saving FIG-files larger than 2 GB.

Backward Compatibility

When creating a figure you want to save and use in a MATLAB version prior to MATLAB 7, use the `'v6'` option with the plotting function and the `'-v6'` option for `hgsave`. Check the reference page for the plotting function you are using for more information.

In MATLAB release R2014b or later, you cannot open a save FIG-file in earlier versions of MATLAB. Use `savefig` to save figures that are compatible with earlier versions of MATLAB.

Alternatives

Use the **File > Export Setup** dialog. Use **Edit > Copy Figure** to copy the figure's content to the system clipboard. For details, see "Customize Figure Interactively Before Saving" and "Copy Figure to Clipboard from Edit Menu".

See Also

`hgload` | `open` | `save` | `savefig`

Introduced before R2006a

hgsetget

Abstract class used to derive handle class with set and get methods

Note: `hgsetget` will be removed in a future release. Use matlab.mixin.SetGet instead.

Syntax

```
classdef myclass < hgsetget
```

Description

`classdef myclass < hgsetget` makes *`myclass`* a subclass of the `hgsetget` class, which is a subclass of the `handle` class.

Use the `hgsetget` class to derive classes that inherit `set` and `get` methods that behave like Handle Graphics® `set` and `get` functions.

Methods

When you derive a class from the `hgsetget` class, your class inherits the following methods.

Method	Purpose
set	Assigns values to the specified properties or returns a cell array of possible values for writable properties.
get	Returns value of specified property or a `struct` with all property values.
setdisp	Called when `set` is called with no output arguments and a handle array, but no property name. Override this method to change what set displays.

Method	Purpose
getdisp	Called when `get` is called with no output arguments and handle array, but no property name. Override this method to change what get displays.

See Also

Topics

"Implement Set/Get Interface for Properties"

hgtransform

Create transform object

Syntax

```
h = hgtransform
h = hgtransform('PropertyName',propertyvalue,...)
h = hgtransform(ax,...)
```

Properties

For a list of properties, see Transform Properties.

Description

`h = hgtransform` creates a `Transform` object and returns its handle.

`h = hgtransform('PropertyName',propertyvalue,...)` creates a `Transform` object with the property value settings specified in the argument list. For a description of the properties, see Transform Properties.

`h = hgtransform(ax,...)` creates the `Transform` object in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`Transform` objects can contain other objects, which lets you treat the `Transform` object and its children as a single entity with respect to visibility, size, orientation, etc. You can group objects by parenting them to a single `Transform` object (i.e., setting the object's `Parent` property to the transform object's handle):

```
h = hgtransform;
surface('Parent',h,...)
```

The primary advantage of parenting objects to a `Transform` object is that you can perform *transforms* (for example, translation, scaling, rotation, etc.) on the child objects in unison.

The parent of a `Transform` object is either an `Axes` object or another `Transform` object.

Although you cannot see a `Transform` object, setting its `Visible` property to `off` makes all its children invisible as well.

Exceptions and Limitations

- A `Transform` object can be the parent of any number of axes child objects belonging to the same axes, except for light objects.
- `Transform` objects can never be the parent of axes objects and therefore can contain objects only from a single axes.
- `Transform` objects can be the parent of other transform objects within the same axes.
- You cannot transform `Image` objects because images are not true 3-D objects. Texture mapping the image data to a surface CData enables you to produce the effect of transforming an image in 3-D space.
- Transforms do not affect text objects unless the text object uses data units. If a `Text` object has a position specified in data units, then the transform moves the lower left corner of the text. The transform does not affect the font size or orientation. To change the font size and orientation, use text properties.

Note Many plotting functions clear the axes (remove axes children) before drawing the graph. Clearing the axes also deletes any `Transform` objects in the axes.

Examples

Transforming a Group of Objects

This example shows how to create a 3-D star with a group of surface objects parented to a single transform object. The transform object then rotates the object about the z-axis while scaling its size.

Create an axes and adjust the view. Set the axes limits to prevent auto limit selection during scaling.

```
ax = axes('XLim',[-1.5 1.5],'YLim',[-1.5 1.5],'ZLim',[-1.5 1.5]);
view(3)
grid on
```

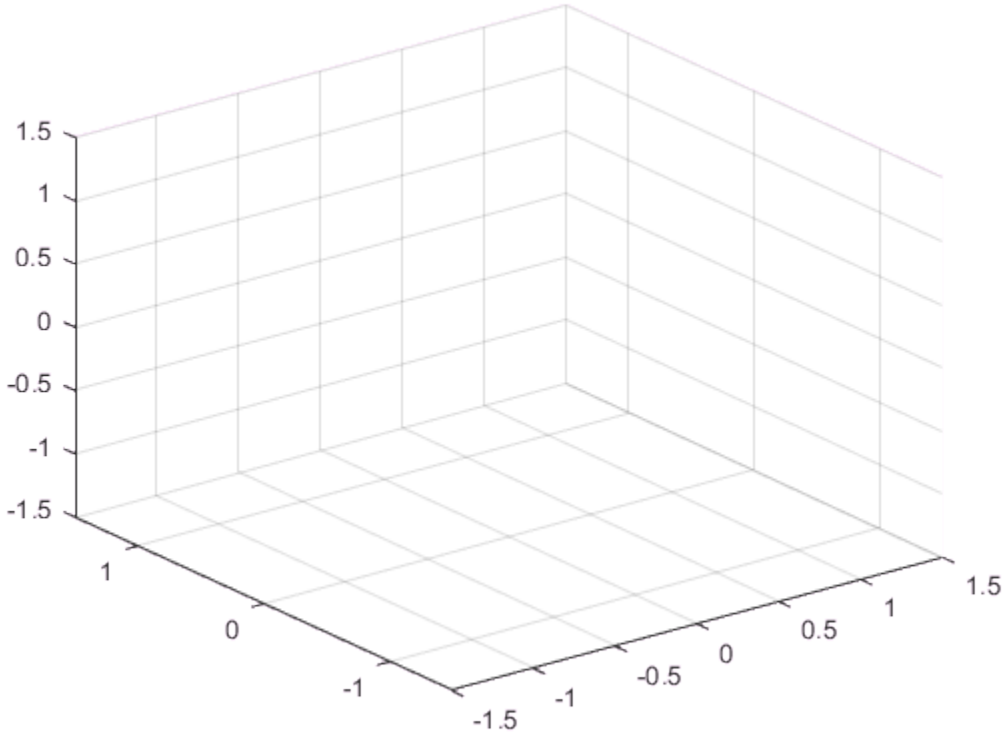

Create the objects you want to parent to the transform object.

```
[x,y,z] = cylinder([.2 0]);
h(1) = surface(x,y,z,'FaceColor','red');
h(2) = surface(x,y,-z,'FaceColor','green');
h(3) = surface(z,x,y,'FaceColor','blue');
h(4) = surface(-z,x,y,'FaceColor','cyan');
h(5) = surface(y,z,x,'FaceColor','magenta');
h(6) = surface(y,-z,x,'FaceColor','yellow');
```

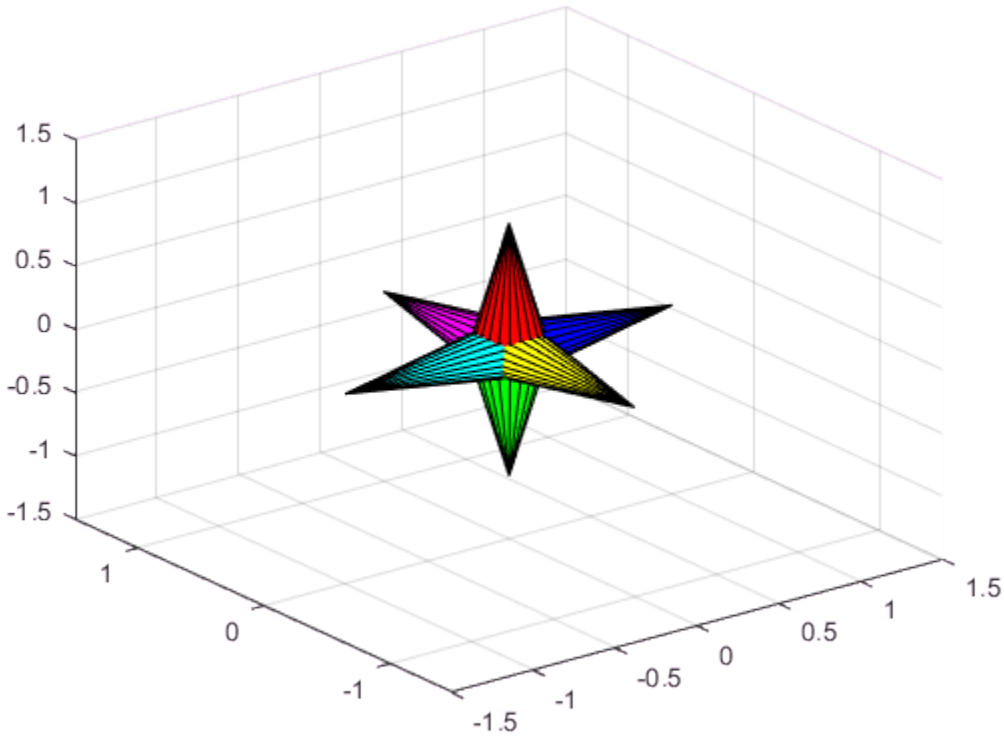

Create a transform object and parent the surface objects to it. Initialize the rotation and scaling matrix to the identity matrix (eye).

```
t = hgtransform('Parent',ax);
set(h,'Parent',t)
```

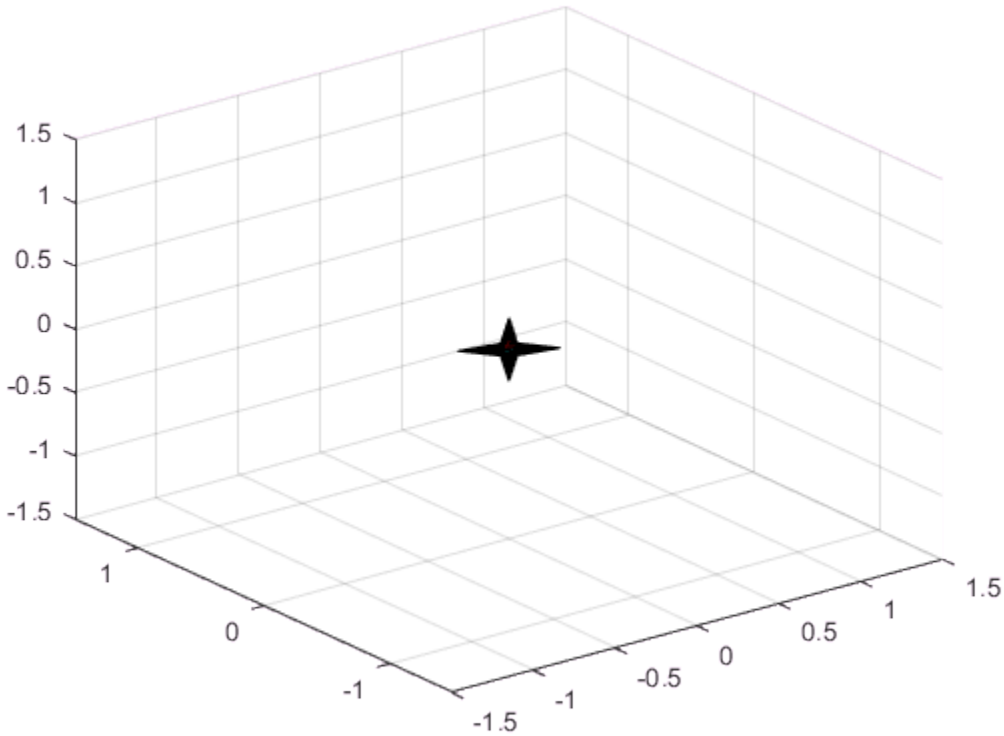


```
Rz = eye(4);
Sxy = Rz;
```

Form the *z*-axis rotation matrix and the scaling matrix. Rotate group and scale by using the increasing values of `r`.

```
for r = 1:.1:2*pi
    % Z-axis rotation matrix
    Rz = makehgtform('zrotate',r);
    % Scaling matrix
    Sxy = makehgtform('scale',r/4);
    % Concatenate the transforms and
    % set the transform Matrix property
```

```
    set(t,'Matrix',Rz*Sxy)
    drawnow
end
```

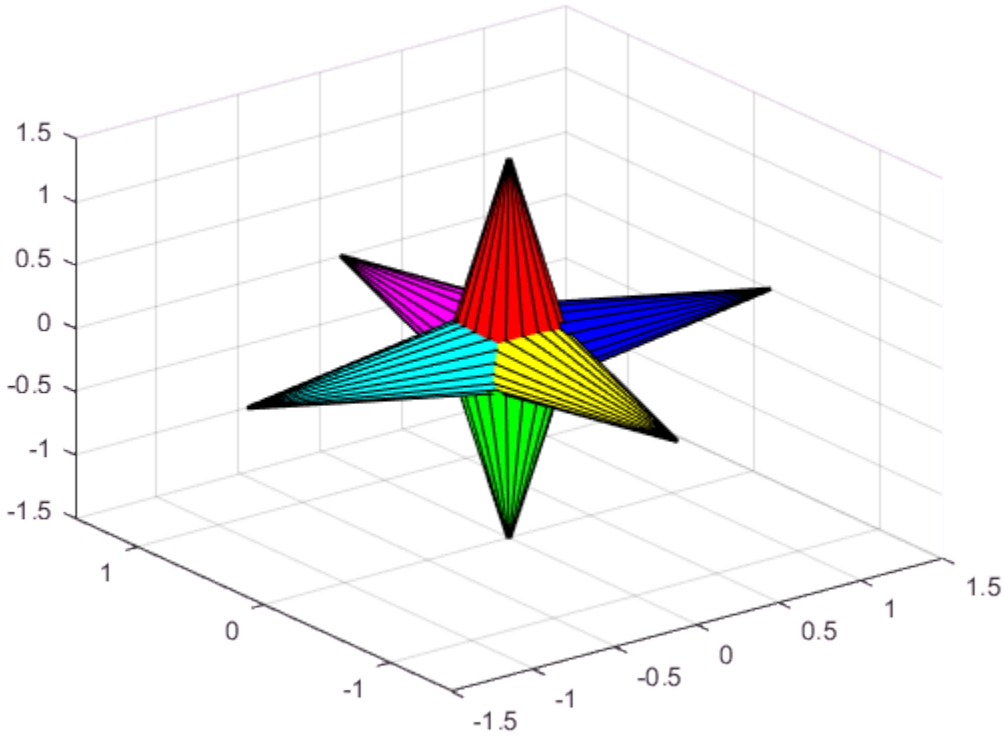


```
pause(1)
```

Reset to the original orientation and size using the identity matrix.

```
set(t,'Matrix',eye(4))
```

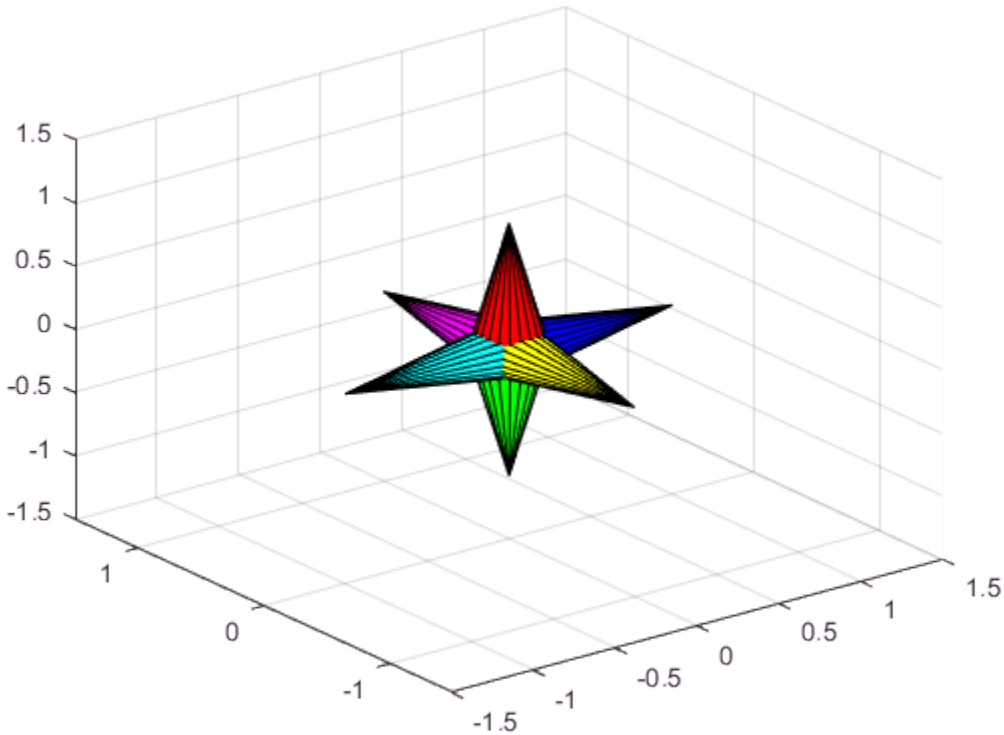

Transforming Objects Independently

This example creates two transform objects to illustrate how to transform each independently within the same axes. A translation transformation moves one transform object away from the origin.

Create and set up the axes object that will be the parent of both transform objects. Set the limits to accommodate the translated object.

```
ax = axes('XLim',[-3 1],'YLim',[-3 1],'ZLim',[-1 1]);
view(3)
grid on
```

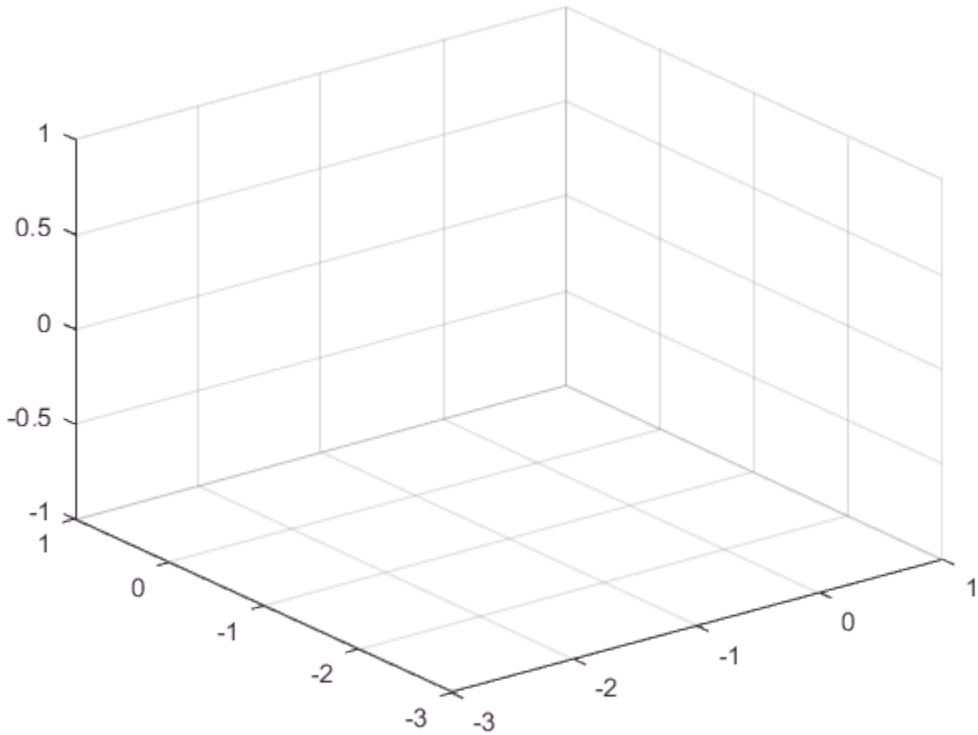

Create the surface objects to group.

```
[x,y,z] = cylinder([.3 0]);
h(1) = surface(x,y,z,'FaceColor','red');
h(2) = surface(x,y,-z,'FaceColor','green');
h(3) = surface(z,x,y,'FaceColor','blue');
h(4) = surface(-z,x,y,'FaceColor','cyan');
h(5) = surface(y,z,x,'FaceColor','magenta');
h(6) = surface(y,-z,x,'FaceColor','yellow');
```

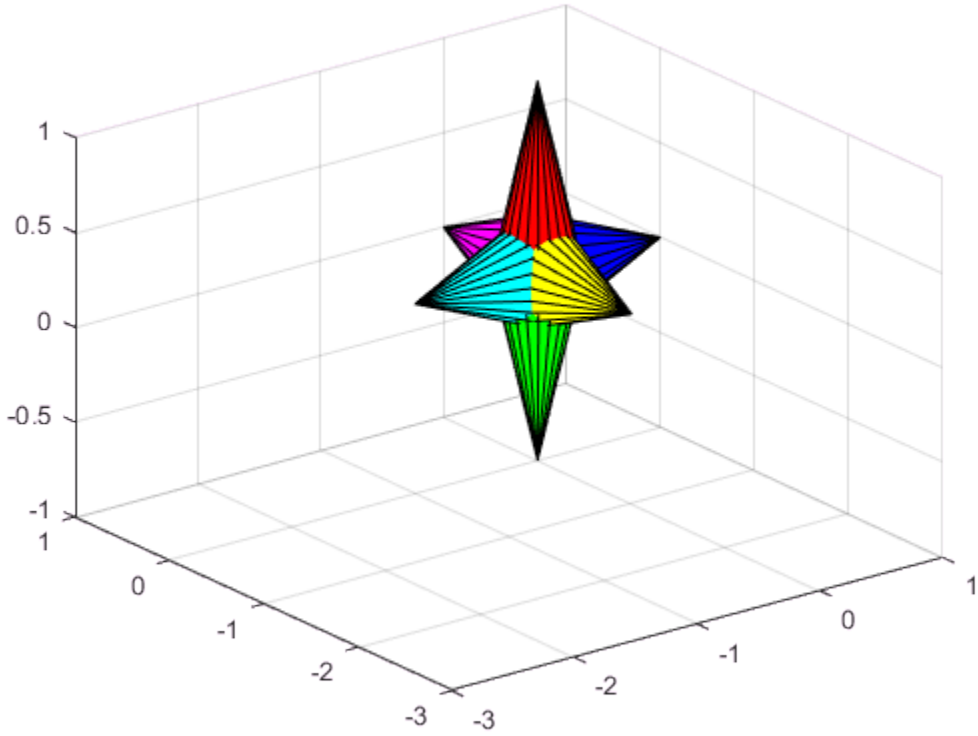

Create the transform objects and parent them to the same axes. Then, parent the surfaces to transform t1. Copy the surface objects and parent the copies to transform t2. This figure should not change.

```
t1 = hgtransform('Parent',ax);
t2 = hgtransform('Parent',ax);

set(h,'Parent',t1)
h2 = copyobj(h,t2);
```

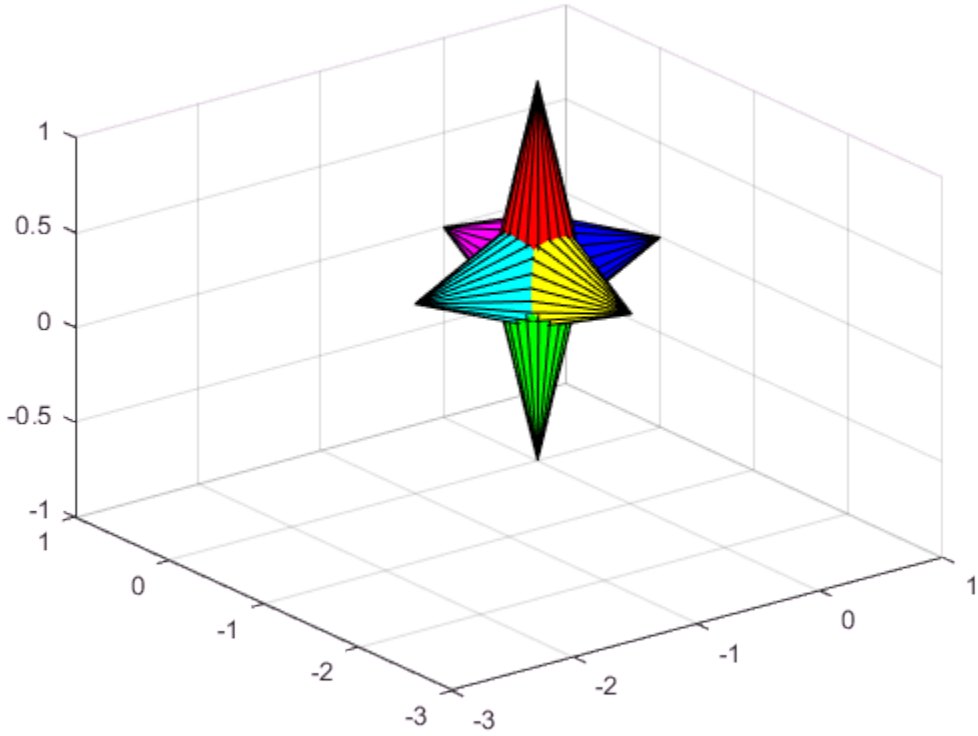

Translate the second transform object away from the first transform object and display the result.

```
Txy = makehgtform('translate',[-1.5 -1.5 0]);
set(t2,'Matrix',Txy)
```

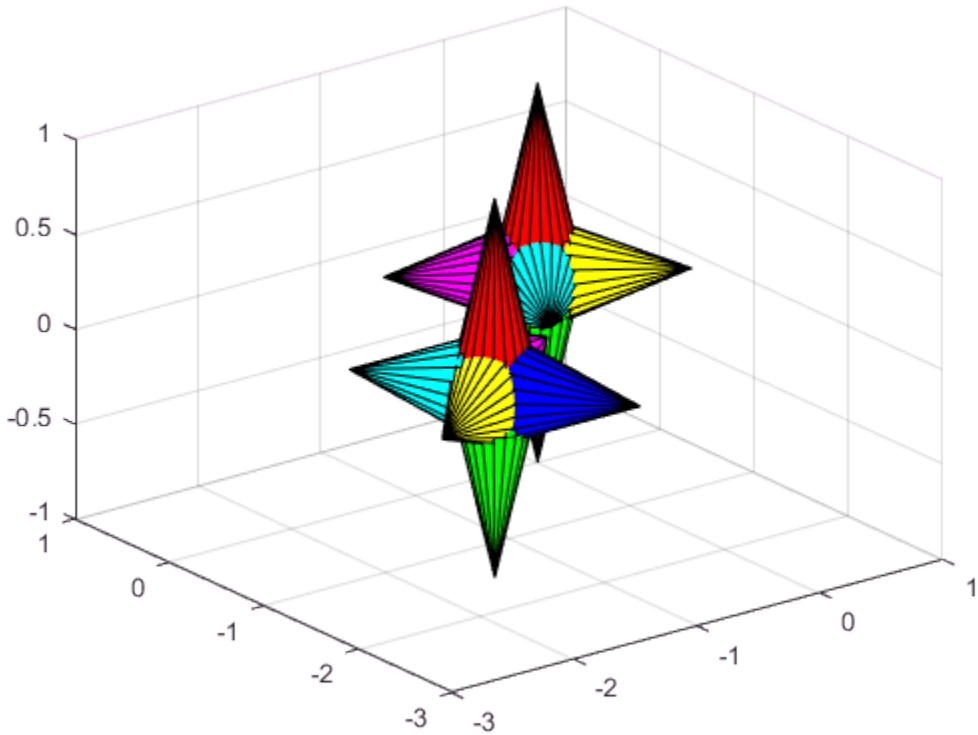


```
drawnow
```

Rotate both transform objects in opposite directions.

```
% Rotate 10 times (2pi radians = 1 rotation)
for r = 1:.1:20*pi
    % Form z-axis rotation matrix
    Rz = makehgtform('zrotate',r);
    % Set transforms for both transform objects
    set(t1,'Matrix',Rz)
    set(t2,'Matrix',Txy*inv(Rz))
    drawnow
end
```

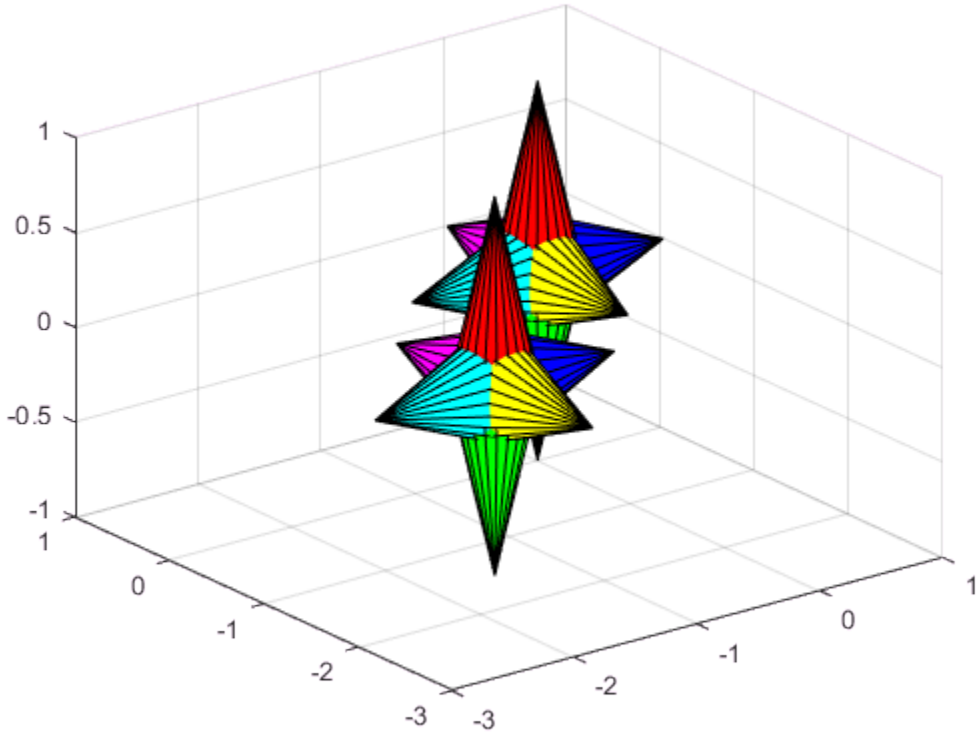

See Also

`hggroup` | `makehgtform`

Topics

"Create Object Groups"

Introduced before R2006a

Transform Properties

Control `Transform` object appearance and behavior

Description

`Transform` properties control the behavior of `Transform` objects. By changing property values, you can modify certain aspects of the `Transform` object.

Starting in R2014b, you can use dot notation to query and set properties.

```
h = hgtransform;
c = h.Children;
h.Matrix = makehgtform('scale',0.5);
```

If you are using an earlier release, use the `get` and `set` functions instead.

Transform Matrix

`Matrix` — Transform matrix
4-by-4 matrix

Transform matrix applied to the transform object and its children, specified as a 4-by-4 matrix. For more information about defining this matrix, see "Transforms Supported by hgtransform".

Data Types: `double`

Visibility

`Visible` — Visibility
`'on'` (default) | `'off'`

Visibility, specified as one of these values:

- `'on'` — Display all objects in the `Transform` object.
- `'off'` — Hide all objects in the `Transform` object. You still can access the properties of invisible `Transform` objects. Setting the `Visible` property for the `Transform` object does not change the `Visible` property for objects in the `Transform` object.

EraseMode — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

Type — Type of graphics object

`'hgtransform'`

This property is read-only.

Type of graphics object, returned as `'hgtransform'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.
- `'children'` — Include only children of the object as separate items in the legend.

For example, exclude a `Stem` object from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array | array of graphics objects

Children, returned as an array of graphics objects. Use this property to view a list of the children or to reorder the children by setting the property to a permutation of itself.

You cannot add or remove children using the `Children` property. To add a child to this list, set the `Parent` property of the child graphics object to the `Transform` object.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.

- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Children that can capture mouse clicks

`'visible'` (default) | `'none'`

Children that can capture mouse clicks, specified as one of these values:

- `'visible'` — Any child object can capture a mouse click, depending on the `PickableParts` property value of the child.
- `'none'` — No child objects can capture mouse clicks, regardless of the `PickableParts` property value of the child.

`HitTest` — Response to mouse clicks captured by children

`'on'` (default) | `'off'`

Response to mouse clicks captured by children, specified one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Transform` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Do not trigger the callbacks of the `Transform` object. Instead, trigger the callbacks for the nearest ancestor that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

A `Transform` object cannot capture mouse clicks. However, if you click a child of the `Transform` object and if the child has a `HitTest` property set to `'off'`, then the child passes the click to the `Transform` object.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Transform` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Transform` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`hgtransform`

Topics

"Access Property Values"
"Graphics Object Properties"

hidden

Remove hidden lines from mesh plot

Syntax

```
hidden on
hidden off
hidden
```

Description

Hidden line removal draws only those lines that are not obscured by other objects in a 3-D view. The `hidden` function only applies to surface plot objects that have a uniform `FaceColor`.

`hidden on` turns on hidden line removal for the current mesh plot so lines in the back of a mesh are hidden by those in front. This is the default behavior.

`hidden off` turns off hidden line removal for the current mesh plot.

`hidden` toggles the hidden line removal state.

Examples

Show Obscured Lines

Create a mesh plot of the `peaks` function.

```
figure
mesh(peaks)
```

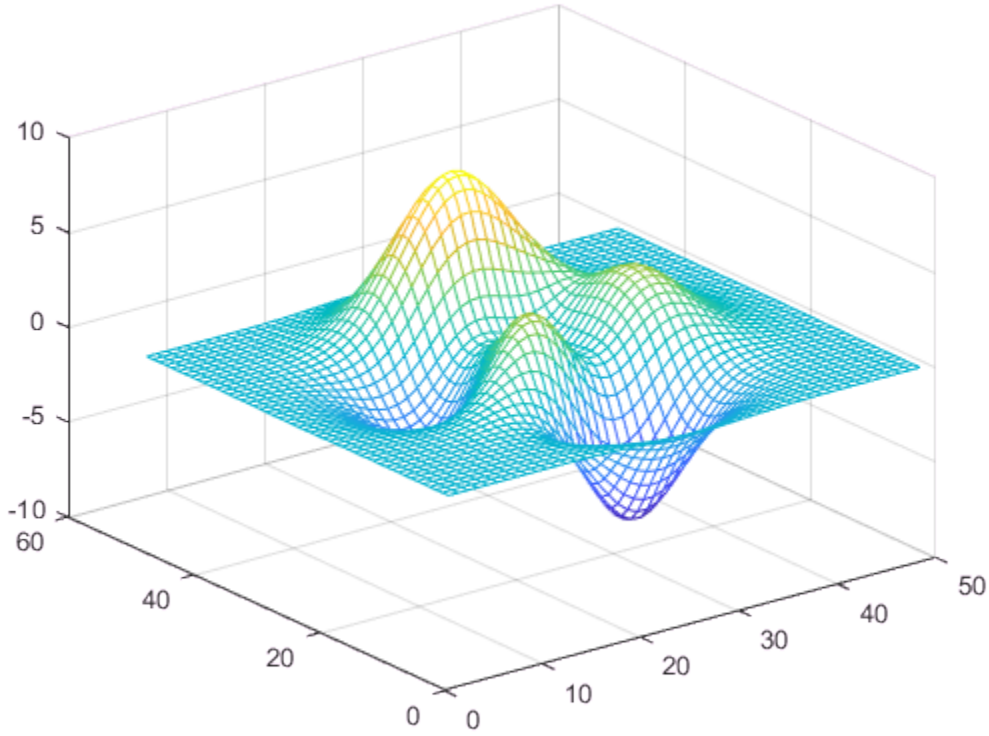

By default, MATLAB® hides obscured lines from the view. Show the obscured parts of the mesh by setting the hidden line removal to `off`.

```
hidden off
```

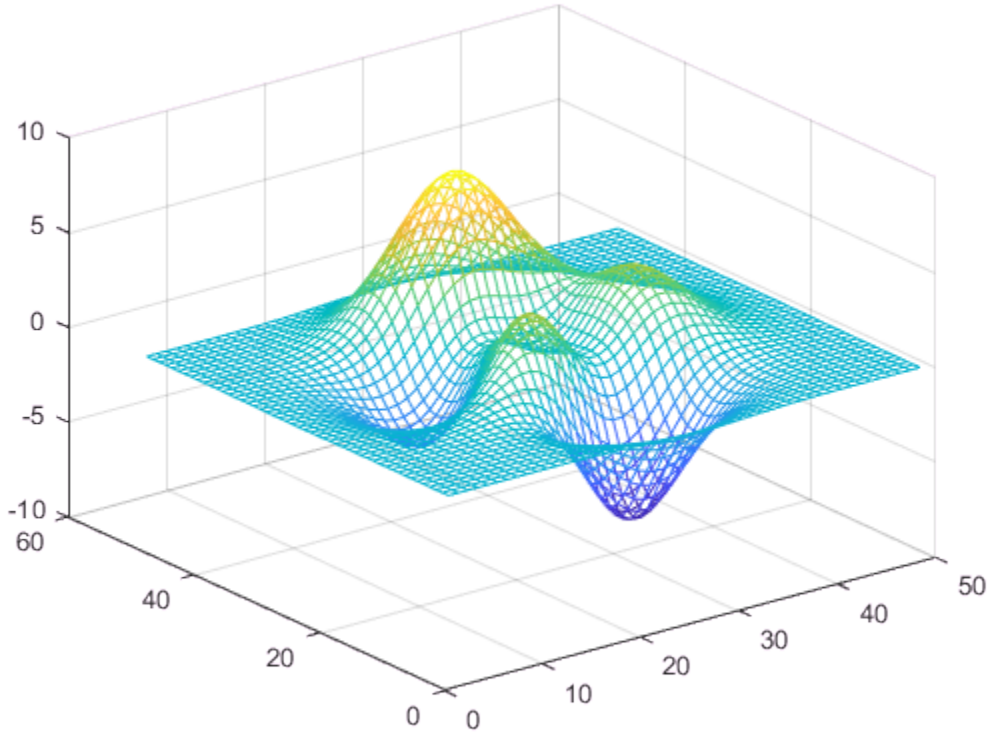

Algorithms

When a surface graphics object has a uniform FaceColor matching the Color property of the axes, `hidden off` sets the `FaceColor` of the surface object to `'none'`.

`hidden on` sets the `FaceColor` property of such surface objects to match the axes `Color` property (or to match that of the figure, if axes `Color` is `'none'`).

See Also

`shading` | `mesh`

Introduced before R2006a

hilb

Hilbert matrix

Syntax

```
H = hilb(n)
```

Description

`H = hilb(n)` returns the Hilbert matrix of order `n`.

Examples

Fourth-Order Hilbert Matrix

Compute the fourth-order Hilbert matrix and its condition number to see that it is poorly conditioned.

```
H = hilb(4)
```

```
H =

    1.0000    0.5000    0.3333    0.2500
    0.5000    0.3333    0.2500    0.2000
    0.3333    0.2500    0.2000    0.1667
    0.2500    0.2000    0.1667    0.1429
```

```
cond(H)
```

```
ans = 1.5514e+04
```

Definitions

Hilbert Matrix

The Hilbert matrix is a notable example of a poorly conditioned matrix [1]. The elements of the Hilbert matrices are $H(i,j) = 1/(i + j - 1)$.

References

[1] Forsythe, G. E. and C. B. Moler, *Computer Solution of Linear Algebraic Systems*, Prentice-Hall, 1967, Chapter 19.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`invhilb`

Introduced before R2006a

hist

Histogram plot (not recommended; use `histogram`)

Compatibility

`hist` is not recommended. Use `histogram` instead.

For more information, including suggestions on updating code, see "Replace Discouraged Instances of hist and histc".

Syntax

```
hist(x)
hist(x,nbins)
hist(x,xbins)

hist(ax, ___ )

counts = hist( ___ )
[counts,centers] = hist( ___ )
```

Description

`hist(x)` creates a histogram bar chart of the elements in vector `x`. The elements in `x` are sorted into 10 equally spaced bins along the *x*-axis between the minimum and maximum values of `x`. `hist` displays bins as rectangles, such that the height of each rectangle indicates the number of elements in the bin.

If the input is a multi-column array, `hist` creates histograms for each column of `x` and overlays them onto a single plot.

If the input is of data type `categorical`, each bin is a category of `x`.

`hist(x,nbins)` sorts `x` into the number of bins specified by the scalar `nbins`.

`hist(x,xbins)` sorts `x` into bins with intervals or categories determined by the vector `xbins`.

- If `xbins` is a vector of evenly spaced values, then `hist` uses the values as the bin centers.
- If `xbins` is a vector of unevenly spaced values, then `hist` uses the midpoints between consecutive values as the bin edges.
- If `x` is of data type `categorical`, then `xbins` must be a categorical vector or cell array of character vectors that specifies categories. `hist` plots bars only for those categories.

The length of the vector `xbins` is equal to the number of bins.

`hist(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`counts = hist( ___ )` returns a row vector, `counts`, containing the number of elements in each bin.

`[counts,centers] = hist( ___ )` returns an additional row vector, `centers`, indicating the location of each bin center on the *x*-axis.

Examples

Histogram of Vector

```
x = [0 2 9 2 5 8 7 3 1 9 4 3 5 8 10 0 1 2 9 5 10];
hist(x)
```

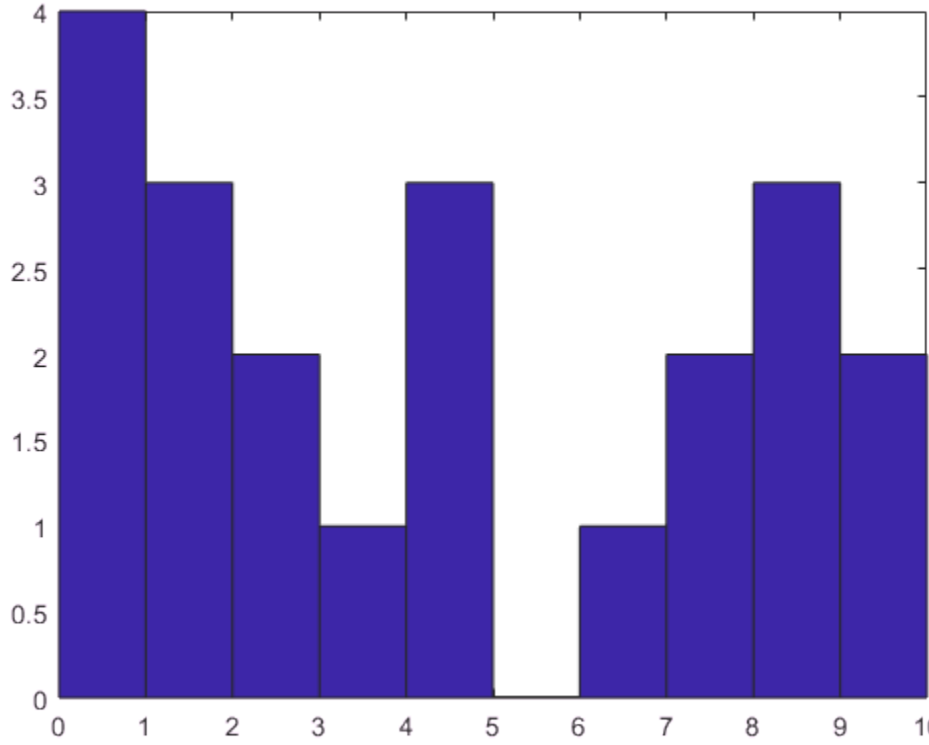

`hist` sorts the values in `x` among 10 equally spaced bins between the minimum and maximum values in the vector, which are 0 and 10 in this example.

Histogram of Multiple Columns

Generate three columns of 1,000 random numbers and plot the three column overlaid histogram.

```
x = randn(1000,3);
hist(x)
```

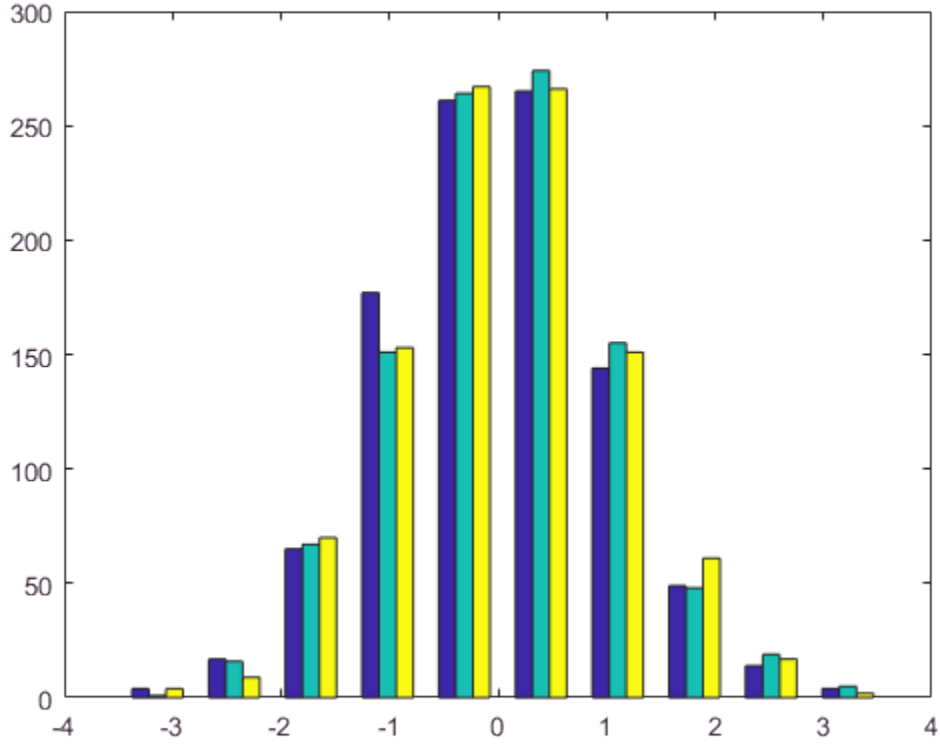

The values in `x` are sorted among 10 equally spaced bins between the minimum and maximum values. `hist` sorts and bins the columns of `x` separately and plots each column with a different color.

Specify Number of Histogram Bins

Plot a histogram of 1,000 random numbers sorted into 50 equally spaced bins.

```
x = randn(1000,1);
nbins = 50;
hist(x,nbins)
```

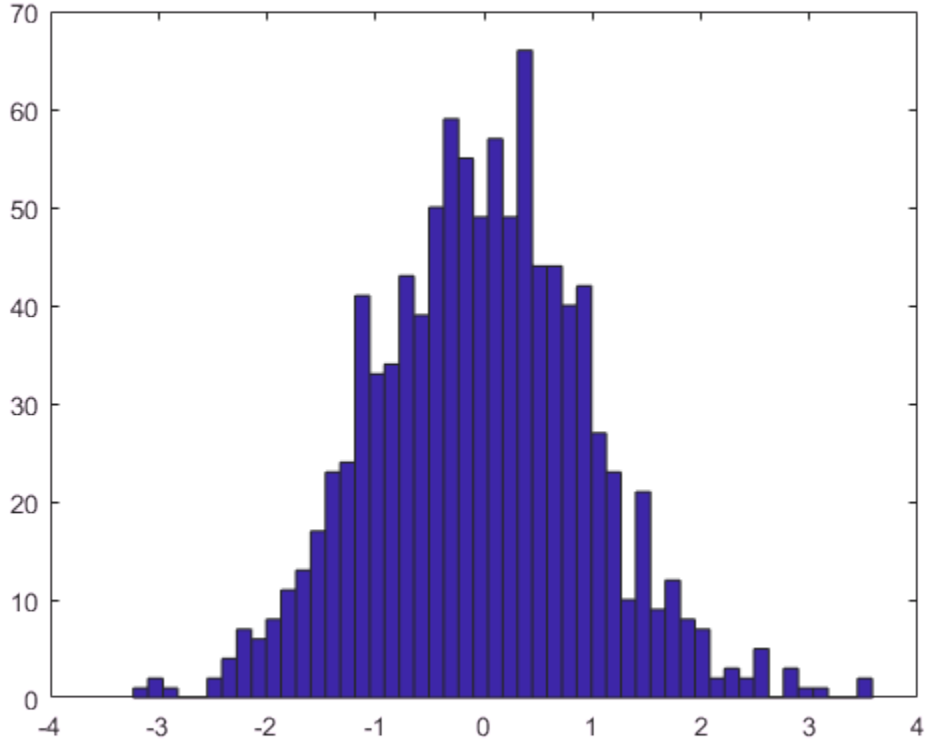

Specify Histogram Bin Intervals

Plot three histograms of the same data using different bin intervals:

- In the upper subplot, specify the bin centers using a vector of evenly spaced values that span the values in `x`.
- In the middle subplot, specify the bin centers using a vector of evenly spaced values that do not span the values in `x`. The first and last bins extend to cover the minimum and maximum values in `x`.
- In the lower subplot, specify the bin intervals using a vector of unevenly spaced values. The `hist` function uses the midpoints between consecutive values as the bin edges and indicates the specified values by markers along the *x*-axis.

```
x = randn(1000,1);
subplot(3,1,1)
xbins1 = -4:4;
hist(x,xbins1)

subplot(3,1,2)
xbins2 = -2:2;
hist(x,xbins2)

subplot(3,1,3)
xbins3 = [-4 -2.5 0 0.5 1 3];
hist(x,xbins3)
```

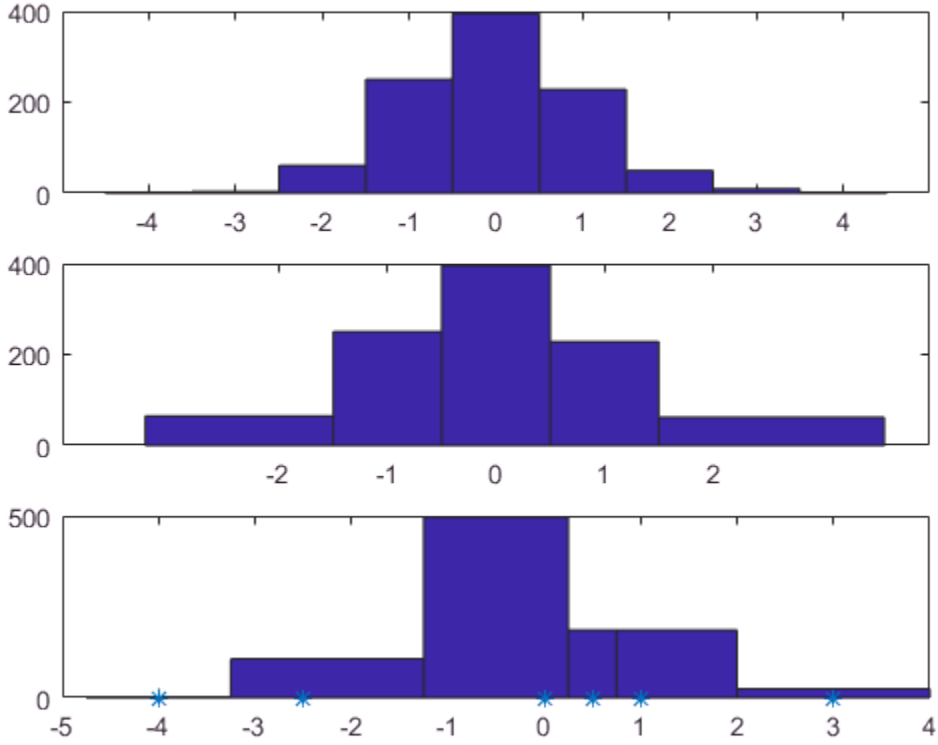

Specify Histogram Axes

Create a figure with two subplots. In the upper subplot, plot a histogram of 1,000 random numbers sorted into 50 equally spaced bins. In the lower subplot, plot a histogram of the same data and use bins with centers at -3, 0, and 3.

```
x = randn(1000,1);
ax1 = subplot(2,1,1);
hist(ax1,x,50)

ax2 = subplot(2,1,2);
xbins = [-3 0 3];
hist(ax2,x,xbins)
```

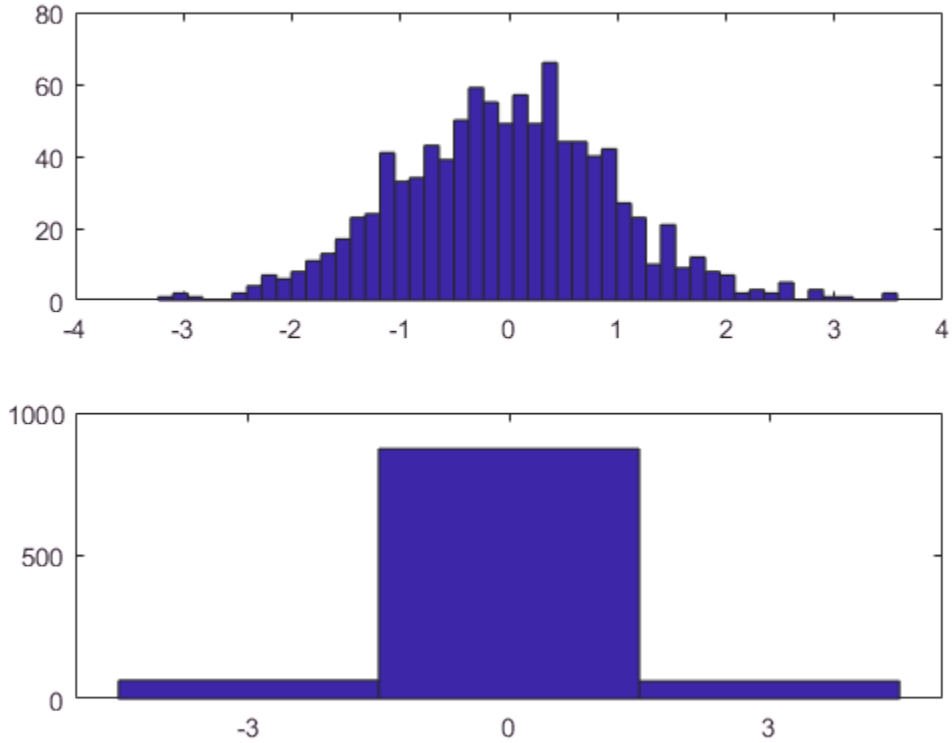

Use hist to Calculate Only

Generate 1,000 random numbers. Count how many numbers are in each of 10 equally spaced bins. Return the bin counts and bin centers.

```
x = randn(1000,1);
[counts,centers] = hist(x)
```

```
counts =

     4    27    88   190   270   243   123    38    13     4


centers =

   -2.8915   -2.2105   -1.5294   -0.8484   -0.1673    0.5137    1.1947    1.8758    2.5
```

Use `bar` to plot the histogram.

```
bar(centers,counts)
```

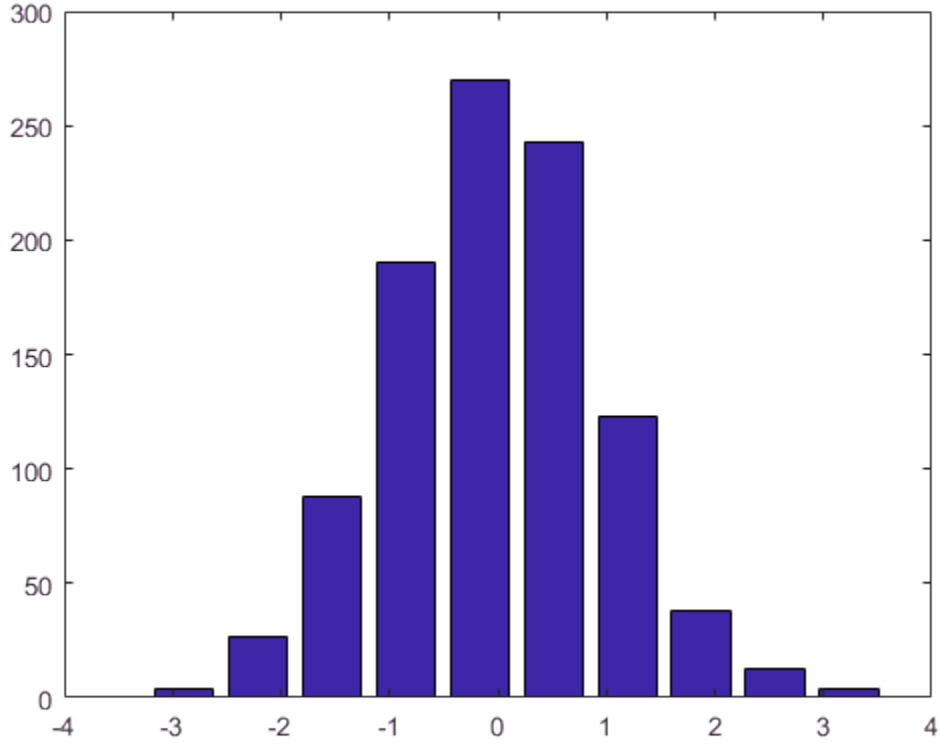

Specify Histogram Colors

Generate 1,000 random numbers and create a histogram.

```
data = randn(1000,1);
hist(data)
```

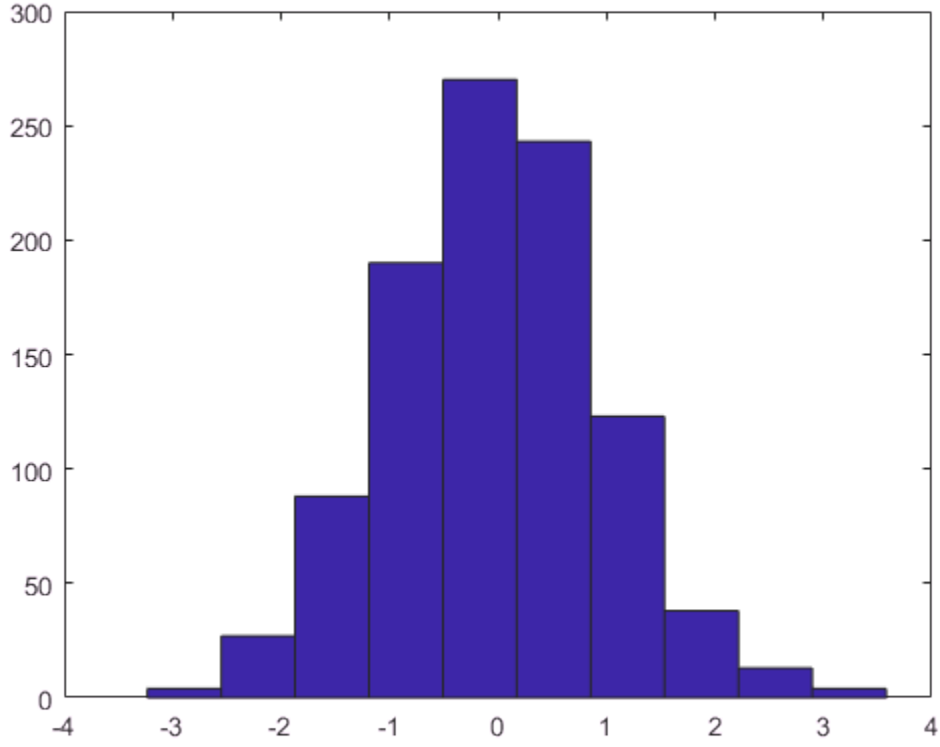

Get the handle to the patch object that creates the histogram plot.

```
h = findobj(gca,'Type','patch');
```

Set the face color of the bars plotted to an RGB triplet value of `[0 0.5 0.5]`. Set the edge color to white.

```
h.FaceColor = [0 0.5 0.5];
h.EdgeColor = 'w';
```

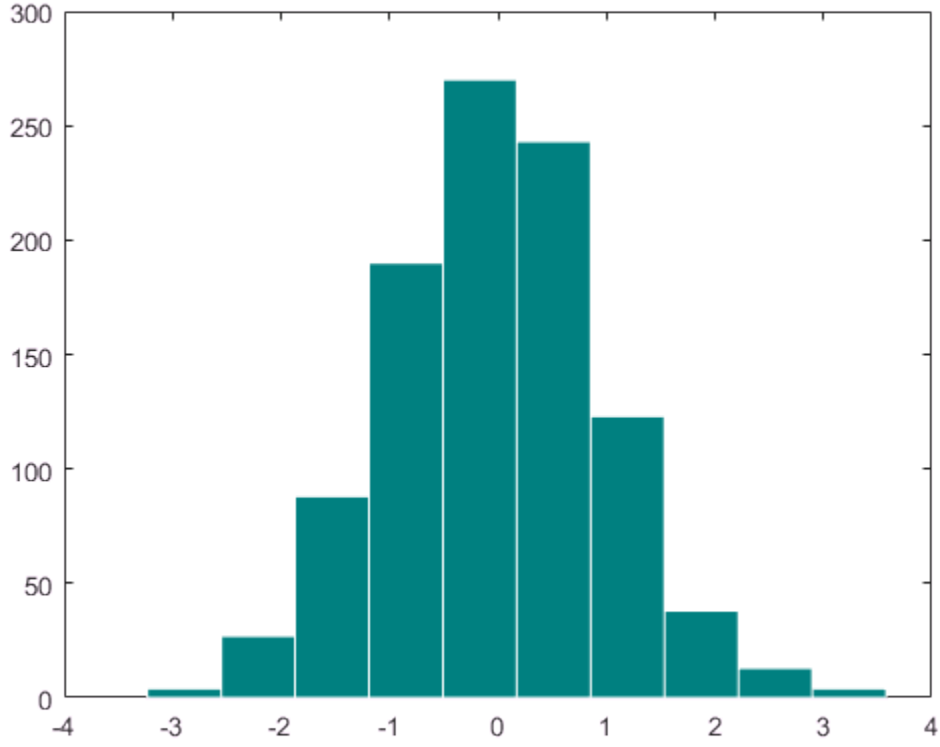

Input Arguments

x — Input array
vector or matrix

Input vector or matrix.

- If `x` is a vector, then `hist` creates one histogram.
- If `x` is a matrix, then `hist` creates a separate histogram for each column and plots the histograms using different colors.

If the input array contains NaNs or undefined categorical values, hist does not include these values in the bin counts.

If the input array contains the infinite values -Inf or Inf, then hist sorts -Inf into the first bin and Inf into the last bin. If you do not specify the bin intervals, then hist calculates the bin intervals using only the finite values in the input array.

Data Types: single|double|logical|categorical

nbins — Number of bins

10 (default) | scalar

Number of bins. Input x must be numeric, not categorical.

Data Types: single|double|int8|int16|int32|int64|uint8|uint16|uint32|uint64

xbins — Bin locations or categories

vector

Bin locations or categories, specified as a vector.

If x is numeric or logical, then xbins must be of type single or double.

- If the elements in xbins are equally spaced, then these elements are the bin centers.
- If the elements in xbins are not equally spaced, then these elements are indicated by markers along the *x*-axis, but are not the actual bin centers. Instead, hist calculates the bin edges as the midpoints between consecutive elements in vector xbins. To specify the bin edges directly, use histc.
- xbins must contain only finite values. The first and last bins extend to cover the minimum and maximum values in x.

If x is categorical, then xbins must be a categorical vector or cell array of character vectors that specifies categories. hist plots bars only for those categories specified by xbins.

ax — Axes object

axes object

Axes object. Use ax to plot the histogram in a specific axes instead of the current axes (gca).

Output Arguments

`counts` — Counts of the number of elements in each bin
row vector

Counts of the number of elements in each bin, returned as a row vector.

`centers` — Bin centers or categories
vector

Bin centers or categories, returned as a vector. If used with the syntax `[counts,centers] = hist(x,xbins)`, then the `centers` output has the same elements as the `xbins` input.

- If `x` is numeric or logical, then `centers` is a numeric row vector.
- If `x` is categorical, then `centers` is a cell array of character vectors.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not support creation of histogram bar charts. Call `hist` with at least one output argument.
- If you supply `nbins`, then it must be a constant, scalar value.
- The values in the input array must be real.
- The orientation of vector outputs might not match the orientation in MATLAB.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

See Also

`bar` | `histc` | `histcounts` | `histogram` | `mode` | `patch` | `rose` | `stairs`

Introduced before R2006a

histc

Histogram bin counts (not recommended; use `histcounts`)

Compatibility

`histc` is not recommended. Use `histcounts` instead.

For more information, including suggestions on updating code, see "Replace Discouraged Instances of hist and histc".

Syntax

```
bincounts = histc(x,binranges)
bincounts = histc(x,binranges,dim)
[bincounts,ind]= histc( ___ )
```

Description

`bincounts = histc(x,binranges)` counts the number of values in `x` that are within each specified bin range. The input, `binranges`, determines the endpoints for each bin. The output, `bincounts`, contains the number of elements from `x` in each bin.

- If `x` is a vector, then `histc` returns `bincounts` as a vector of histogram bin counts.
- If `x` is a matrix, then `histc` operates along each column of `x` and returns `bincounts` as a matrix of histogram bin counts for each column.

To plot the histogram, use `bar(binranges,bincounts,'histc')`.

`bincounts = histc(x,binranges,dim)` operates along the dimension `dim`.

`[bincounts,ind]= histc( ___ )` returns `ind`, an array the same size as `x` indicating the bin number that each entry in `x` sorts into. Use this syntax with any of the previous input argument combinations.

Examples

Create Histogram Plot

Initialize the random number generator to make the output of `randn` repeatable.

```
rng(0,'twister')
```

Define `x` as 100 normally distributed random numbers. Define bin ranges between -4 and 4. Determine the number of values in `x` that are within each specified bin range. Return the number of elements in each bin in `bincounts`.

```
x = randn(100,1);
binranges = -4:4;
[bincounts] = histc(x,binranges)
```

```
bincounts =

     0
     2
    17
    28
    32
    16
     3
     2
     0
```

To plot the histogram, use the `bar` function.

```
figure
bar(binranges,bincounts,'histc')
```

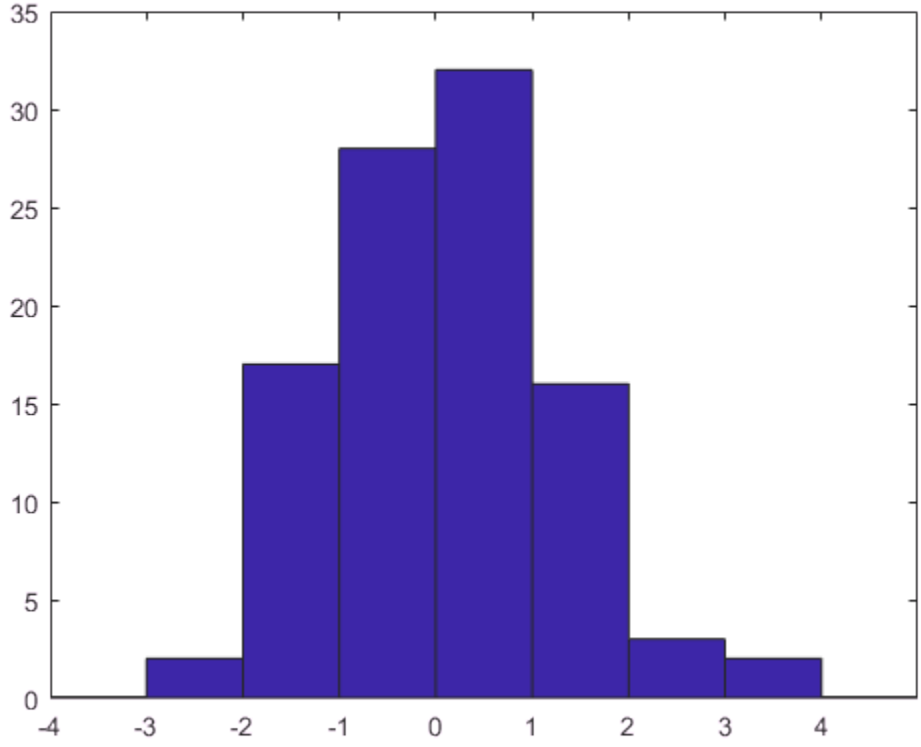

Return Bin Numbers for Histogram

Defined `ages` as a vector of ages. Sort `ages` into bins with varying ranges between 0 and 75.

```
ages = [3,12,24,15,5,74,23,54,31,23,64,75];
binranges = [0,10,25,50,75];

[bincounts,ind] = histc(ages,binranges)

bincounts =

     2     5     1     3     1
```

```
ind =

     1     2     2     2     1     4     2     4     3     2     4     5
```

`bincounts` contains the number of values in each bin. `ind` indicates the bin numbers.

Input Arguments

`x` — Values to be sorted

vector | matrix

Values to be sorted, specified as a vector or a matrix. The bin counts do not include values in `x` that are `NaN` or that lie outside the specified bin ranges. If `x` contains complex values, then `histc` ignores the imaginary parts and uses only the real parts.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`binranges` — Bin ranges

vector | matrix

Bin ranges, specified as a vector of monotonically nondecreasing values or a matrix of monotonically nondecreasing values running down each successive column. The values in `binranges` determine the left and right endpoints for each bin. If `binranges` contains complex values, then `histc` ignores the imaginary parts and uses only the real parts.

If `binranges` is a matrix, then `histc` determines the bin ranges by using values running down successive columns. Each bin includes the left endpoint, but does not include the right endpoint. The last bin consists of the scalar value equal to last value in `binranges`.

For example, if `binranges` equals the vector `[0,5,10,13]`, then `histc` creates four bins. The first bin includes values greater than or equal to 0 and strictly less than 5. The second bin includes values greater than or equal to 5 and less than 10, and so on. The last bin contains the scalar value 13.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`dim` — Dimension along which to operate
scalar

Dimension along which to operate, specified as a scalar.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Output Arguments

`bincounts` — Number of elements in each bin
vector | matrix

Number of elements in each bin, returned as a vector or a matrix. The last entry in `bincounts` is the number of values in `x` that equal the last entry in `binranges`.

`ind` — Bin index numbers
vector | matrix

Bin index numbers, returned as a vector or a matrix that is the same size as `x`.

Tips

- If values in `x` lie outside the specified bin ranges, then `histc` does not include these values in the bin counts. Start and end the `binranges` vector with `-inf` and `inf` to ensure that all values in `x` are included in the bin counts.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The output of a variable-size array that becomes a column vector at run time is a column-vector, not a row-vector.

- If supplied, `dim` must be a constant.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`bar` | `hist` | `histcounts` | `histogram` | `mode`

Introduced before R2006a

histcounts

Histogram bin counts

Syntax

```
[N,edges] = histcounts(X)
[N,edges] = histcounts(X,nbins)
[N,edges] = histcounts(X,edges)
[N,edges,bin] = histcounts( ___ )

N = histcounts(C)
N = histcounts(C,Categories)
[N,Categories] = histcounts( ___ )

[ ___ ] = histcounts( ___ ,Name,Value)
```

Description

`[N,edges] = histcounts(X)` partitions the `X` values into bins, and returns the count in each bin, as well as the bin edges. The `histcounts` function uses an automatic binning algorithm that returns bins with a uniform width, chosen to cover the range of elements in `X` and reveal the underlying shape of the distribution.

`[N,edges] = histcounts(X,nbins)` uses a number of bins specified by the scalar, `nbins`.

`[N,edges] = histcounts(X,edges)` sorts `X` into bins with the bin edges specified by the vector, `edges`. The value `X(i)` is in the `k`th bin if `edges(k)` ≤ `X(i)` < `edges(k+1)`. The last bin also includes the right bin edge, so that it contains `X(i)` if `edges(end-1)` ≤ `X(i)` ≤ `edges(end)`.

`[N,edges,bin] = histcounts( ___ )` also returns an index array, `bin`, using any of the previous syntaxes. `bin` is an array of the same size as `X` whose elements are the bin indices for the corresponding elements in `X`. The number of elements in the `k`th bin is `nnz(bin==k)`, which is the same as `N(k)`.

`N = histcounts(C)`, where `C` is a categorical array, returns a vector, `N`, that indicates the number of elements in `C` whose value is equal to each of `C`'s categories. `N` has one element for each category in `C`.

`N = histcounts(C,Categories)` counts only the elements in `C` whose value is equal to the subset of categories specified by `Categories`.

`[N,Categories] = histcounts( ___ )` also returns the categories that correspond to each count in `N` using either of the previous syntaxes for categorical arrays.

`[ ___ ] = histcounts( ___ ,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments using any of the input or output argument combinations in previous syntaxes. For example, you can specify `'BinWidth'` and a scalar to adjust the width of the bins for numeric data. For categorical data, you can specify `'Normalization'` and either `'count'`, `'countdensity'`, `'probability'`, `'pdf'`, `'cumcount'`, or `'cdf'`.

Examples

Bin Counts and Bin Edges

Distribute 100 random values into bins. `histcounts` automatically chooses an appropriate bin width to reveal the underlying distribution of the data.

```
X = randn(100,1);
[N,edges] = histcounts(X)
```

```
N =

     2    17    28    32    16     3     2


edges =

    -3    -2    -1     0     1     2     3     4
```

Specify Number of Bins

Distribute 10 numbers into 6 equally spaced bins.

```
X = [2 3 5 7 11 13 17 19 23 29];
[N,edges] = histcounts(X,6)
```

```
N =

     2     2     2     2     1     1


edges =

         0    4.9000    9.8000   14.7000   19.6000   24.5000   29.4000
```

Specify Bin Edges

Distribute 1,000 random numbers into bins. Define the bin edges with a vector, where the first element is the left edge of the first bin, and the last element is the right edge of the last bin.

```
X = randn(1000,1);
edges = [-5 -4 -2 -1 -0.5 0 0.5 1 2 4 5];
N = histcounts(X,edges)
```

```
N =

     0    24   149   142   195   200   154   111    25     0
```

Normalized Bin Counts

Distribute all of the prime numbers less than 100 into bins. Specify `'Normalization'` as `'probability'` to normalize the bin counts so that `sum(N)` is `1`. That is, each bin count represents the probability that an observation falls within that bin.

```
X = primes(100);
[N,edges] = histcounts(X, 'Normalization', 'probability')
```

```
N =

    0.4000    0.2800    0.2800    0.0400


edges =
```

```
     0    30    60    90   120
```

Determine Bin Placement

Distribute 100 random integers between -5 and 5 into bins, and specify `'BinMethod'` as `'integers'` to use unit-width bins centered on integers. Specify a third output for `histcounts` to return a vector representing the bin indices of the data.

```
X = randi([-5,5],100,1);
[N,edges,bin] = histcounts(X,'BinMethod','integers');
```

Find the bin count for the third bin by counting the occurrences of the number `3` in the bin index vector, `bin`. The result is the same as `N(3)`.

```
count = nnz(bin==3)
```

```
count = 8
```

Categorical Bin Counts

Create a categorical vector that represents votes. The categories in the vector are `'yes'`, `'no'`, or `'undecided'`.

```
A = [0 0 1 1 1 0 0 0 0 NaN NaN 1 0 0 0 1 0 1 0 1 0 0 0 1 1 1 1];
C = categorical(A,[1 0 NaN],{'yes','no','undecided'})
```

```
C = 1×27 categorical array
     no      no      yes      yes      yes      no      no      no      no      undeci
```

Determine the number of elements that fall into each category.

```
[N,Categories] = histcounts(C)
```

```
N =

    11    14     2


Categories = 1×3 cell array
    'yes'    'no'    'undecided'
```

Input Arguments

X — Data to distribute among bins

vector | matrix | multidimensional array

Data to distribute among bins, specified as a vector, matrix, or multidimensional array. If X is not a vector, then histcounts treats it as a single column vector, X(:).

histcounts ignores all NaN values. Similarly, histcounts ignores Inf and -Inf values unless the bin edges explicitly specify Inf or -Inf as a bin edge.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | datetime | duration

C — Categorical data

categorical array

Categorical data, specified as a categorical array. histcounts ignores undefined categorical values.

Data Types: categorical

nbins — Number of bins

positive integer

Number of bins, specified as a positive integer. If you do not specify nbins, then histcounts automatically calculates how many bins to use based on the values in X.

Example: [N,edges] = histcounts(X,15) uses 15 bins.

edges — Bin edges

vector

Bin edges, specified as a vector. edges(1) is the left edge of the first bin, and edges(end) is the right edge of the last bin.

For datetime and duration data, edges must be a datetime or duration vector in monotonically increasing order.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | datetime | duration

`Categories` — Categories included in count
all categories (default) | cell vector of character vectors | categorical vector

Categories included in count, specified as a cell vector of character vectors or a categorical vector. By default, `histcounts` uses a bin for each category in categorical array `C`. Use `Categories` to specify a unique subset of the categories instead.

Example: `h = histcounts(C,{'Large','Small'})` counts only the categorical data in the categories `'Large'` and `'Small'`.

Data Types: `cell` | `categorical`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `[N,edges] = histcounts(X,'Normalization','probability')` normalizes the bin counts in `N`, such that `sum(N)` is 1.

`'BinLimits'` — Bin limits
two-element vector

Bin limits, specified as a two-element vector, `[bmin,bmax]`. This option bins only the values in `X` that fall between `bmin` and `bmax` inclusive; that is, `X(X>=bmin & X<=bmax)`.

This option does not apply to categorical data.

Example: `[N,edges] = histcounts(X,'BinLimits',[1,10])` bins only the values in `X` that are between `1` and `10` inclusive.

`'BinMethod'` — Binning algorithm
`'auto'` (default) | `'scott'` | `'fd'` | `'integers'` | `'sturges'` | `'sqrt'` | ...

Binning algorithm, specified as one of the values in this table.

Value	Description
`'auto'`	The default `'auto'` algorithm chooses a bin width to cover the data range and reveal the shape of the underlying distribution.

Value	Description
`'scott'`	Scott's rule is optimal if the data is close to being normally distributed, but is also appropriate for most other distributions. It uses a bin width of `3.5*std(X(:))*numel(X)^(-1/3)`.
`'fd'`	The Freedman-Diaconis rule is less sensitive to outliers in the data, and may be more suitable for data with heavy-tailed distributions. It uses a bin width of `2*IQR(X(:))*numel(X)^(-1/3)`, where `IQR` is the interquartile range of `X`.
`'integers'`	The integer rule is useful with integer data, as it creates a bin for each integer. It uses a bin width of 1 and places bin edges halfway between integers. To prevent from accidentally creating too many bins, a limit of 65536 bins (2^{16}) can be created with this rule. If the data range is greater than 65536, then wider bins are used instead. **Note:** `'integers'` does not support datetime or duration data.
`'sturges'`	Sturges' rule is a simple rule that is popular due to its simplicity. It chooses the number of bins to be `ceil(1 + log2(numel(X)))`.
`'sqrt'`	The Square Root rule is another simple rule widely used in other software packages. It chooses the number of bins to be `ceil(sqrt(numel(X)))`.

For datetime data, the bin method can be one of these units of time:

`'second'`	`'month'`
`'minute'`	`'quarter'`

'hour'	'year'
'day'	'decade'
'week'	'century'

For duration data, the bin method can be one of these units of time:

'second'	'day'
'minute'	'year'
'hour'	

This option does not apply to categorical data.

Example: `[N,edges] = histcounts(X,'BinMethod','integers')` uses bins centered on integers.

'BinWidth' — Width of bins

scalar

Width of bins, specified as a scalar. If you specify `BinWidth`, then `histcounts` can use a maximum of 65,536 bins (or 2^{16}). If the specified bin width requires more bins, then `histcounts` uses a larger bin width corresponding to the maximum number of bins.

For datetime and duration data, the value of `'BinWidth'` can be a scalar duration or calendar duration.

This option does not apply to categorical data.

Example: `[N,edges] = histcounts(X,'BinWidth',5)` uses bins with a width of 5.

'Normalization' — Type of normalization

`'count'` (default) | `'probability'` | `'countdensity'` | `'pdf'` | `'cumcount'` | `'cdf'`

Type of normalization, specified as one of the values in this table. For each bin `i`:

- v_i is the bin value.
- c_i is the number of elements in the bin.
- w_i is the width of the bin.

- N is the number of elements in the input data. This value can be greater than the binned data if the data contains `NaN`, `NaT`, or `<undefined>` values, or if some of the data lies outside the bin limits.

Value	Bin Values	Notes
`'count'` (default)	$v_i = c_i$	• Count or frequency of observations. • Sum of bin values is less than or equal to `numel(X)`. The sum is less than `numel(X)` only when some of the input data is not included in the bins. • For categorical data, sum of bin values is either `numel(X)` or `sum(ismember(X(:),Categories))`
`'countdensity'`	$v_i = \frac{c_i}{w_i}$	• Count or frequency scaled by width of bin. • For categorical data, this the same as `'count'`. **Note:** `'countdensity'` does not support datetime or duration data.
`'cumcount'`	$v_i = \sum_{j=1}^{i} c_j$	• Cumulative count. Each bin value is the cumulative number of observations in that bin and all previous bins. • The value of the last bin is less than or equal to `numel(X)`. • For categorical data, the value of the last

Value	Bin Values	Notes
		bin is less than or equal to `numel(X)` or `sum(ismember(X(:),Categories))`
`'probability'`	$v_i = \frac{c_i}{N}$	• Relative probability. • The sum of the bin values is less than or equal to `1`.
`'pdf'`	$v_i = \frac{c_i}{N \cdot w_i}$	• Probability density function estimate. • For categorical data, this is the same as `'probability'`. **Note:** `'pdf'` does not support datetime or duration data.
`'cdf'`	$v_i = \sum_{j=1}^{i} \frac{c_j}{N}$	• Cumulative density function estimate. • `N(end)` is less than or equal to `1`.

Example: `[N,edges] = histcounts(X,'Normalization','pdf')` bins the data using the probability density function estimate.

Output Arguments

N — Bin counts

row vector

Bin counts, returned as a row vector.

edges — Bin edges

vector

Bin edges, returned as a vector. `edges(1)` is the left edge of the first bin, and `edges(end)` is the right edge of the last bin.

`bin` — Bin indices
array

Bin indices, returned as an array of the same size as `X`. Each element in `bin` describes which numbered bin contains the corresponding element in `X`.

A value of `0` in `bin` indicates an element which does not belong to any of the bins (for example, a `NaN` value).

`Categories` — Categories included in count
cell vector of character vectors

Categories included in count, returned as a cell vector of character vectors. `Categories` contains the categories in `C` that correspond to each count in `N`.

Tips

- The behavior of `histcounts` is similar to that of the `discretize` function. Use `histcounts` to find the number of elements in each bin. On the other hand, use `discretize` to find which bin each element belongs to (without counting).

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- Some input options are not supported. The allowed options are:
  - `'BinWidth'`
  - `'BinLimits'`
  - `'Normalization'`

- `'BinMethod'` — The `'auto'` and `'scott'` bin methods are the same. The `'fd'` bin method is not supported.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you do not supply bin edges, then code generation might require variable-size arrays and dynamic memory allocation.

See Also

See Also

`discretize` | `histcounts2` | `histogram` | `histogram2`

Topics

"Replace Discouraged Instances of hist and histc"

Introduced in R2014b

histcounts2

Bivariate histogram bin counts

Syntax

```
[N,Xedges,Yedges] = histcounts2(X,Y)
[N,Xedges,Yedges] = histcounts2(X,Y,nbins)
[N,Xedges,Yedges] = histcounts2(X,Y,Xedges,Yedges)
[N,Xedges,Yedges] = histcounts2( ___ ,Name,Value)
[N,Xedges,Yedges,binX,binY] = histcounts2( ___ )
```

Description

`[N,Xedges,Yedges] = histcounts2(X,Y)` partitions the values in `X` and `Y` into 2-D bins, and returns the bin counts, as well as the bin edges in each dimension. The `histcounts2` function uses an automatic binning algorithm that returns uniform bins chosen to cover the range of values in `X` and `Y` and reveal the underlying shape of the distribution.

`[N,Xedges,Yedges] = histcounts2(X,Y,nbins)` specifies the number of bins to use in each dimension.

`[N,Xedges,Yedges] = histcounts2(X,Y,Xedges,Yedges)` partitions `X` and `Y` into bins with the bin edges specified by `Xedges` and `Yedges`.

`N(i,j)` counts the value `[X(k),Y(k)]` if `Xedges(i)` ≤ `X(k)` < `Xedges(i+1)` and `Yedges(j)` ≤ `Y(k)` < `Yedges(j+1)`. The last bins in each dimension also include the last (outer) edge. For example, `[X(k),Y(k)]` falls into the `i`th bin in the last row if `Xedges(end-1)` ≤ `X(k)` ≤ `Xedges(end)` and `Yedges(i)` ≤ `Y(k)` < `Yedges(i+1)`.

`[N,Xedges,Yedges] = histcounts2( ___ ,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments using any of the input arguments in previous syntaxes. For example, you can specify `'BinWidth'` and a two-element vector to adjust the width of the bins in each dimension.

`[N,Xedges,Yedges,binX,binY] = histcounts2( ___ )` also returns index arrays `binX` and `binY`, using any of the previous syntaxes. `binX` and `binY` are arrays of the

same size as X and Y whose elements are the bin indices for the corresponding elements in X and Y. The number of elements in the `(i,j)`th bin is equal to `nnz(binX==i & binY==j)`, which is the same as `N(i,j)` if `Normalization` is `'count'`.

Examples

Bin Counts and Bin Edges

Distribute 100 pairs of random numbers into bins. `histcounts2` automatically chooses an appropriate bin width to reveal the underlying distribution of the data.

```
x = randn(100,1);
y = randn(100,1);
[N,Xedges,Yedges] = histcounts2(x,y)
```

```
N =

     0     0     0     2     0     0
     1     2    10     4     0     0
     1     4     9     9     5     0
     1     4    10    11     5     1
     1     4     6     3     1     1
     0     0     1     2     0     0
     0     0     1     0     1     0


Xedges =

    -3    -2    -1     0     1     2     3     4


Yedges =

    -3    -2    -1     0     1     2     3
```

Specify Number of Bins in Each Dimension

Distribute 10 pairs of numbers into 12 bins. Specify 3 bins in the x-dimension, and 4 bins in the y-dimension.

```
x = [1 1 2 3 2 2 1 1 2 3];
```

```
y = [5 6 3 8 9 1 2 7 5 1];
nbins = [3 4];
[N,Xedges,Yedges] = histcounts2(x,y,nbins)
```

```
N =

     1     0     2     1
     1     1     1     1
     1     0     0     1


Xedges =

    0.6000    1.4000    2.2000    3.0000


Yedges =

         0    2.3000    4.6000    6.9000    9.2000
```

Specify Bin Edges

Distribute 1,000 pairs of random numbers into bins. Define the bin edges with two vectors: one each for the x and y dimensions. The first element in each vector specifies the first edge of the first bin, and the last element is the last edge of the last bin.

```
x = randn(1000,1);
y = randn(1000,1);
Xedges = -5:5;
Yedges = [-5 -4 -2 -1 -0.5 0 0.5 1 2 4 5];
N = histcounts2(x,y,Xedges,Yedges)
```

```
N =

     0     0     0     0     0     0     0     0     0     0
     0     0     0     0     1     1     1     0     0     0
     0     0     5     5     3     5     1     2     0     0
     0     2    19    23    29    25    26    20     5     0
     0    10    36    51    59    71    54    46    10     0
     0     7    43    46    79    64    60    46     9     0
     0     3    12    18    21    23    19     9     6     0
     0     0     5     3     2     8     2     2     0     0
     0     0     0     1     1     1     0     0     0     0
```

```
     0     0     0     0     0     0     0     0     0     0
```

Normalized Bin Counts

Distribute 1,000 pairs of random numbers into bins. Specify `Normalization` as `'probability'` to normalize the bin counts such that `sum(N(:))` is `1`. That is, each bin count represents the probability that an observation falls within that bin.

```
x = randn(1000,1);
y = randn(1000,1);
[N,Xedges,Yedges] = histcounts2(x,y,6,'Normalization','probability')
```

```
N =

         0         0    0.0020    0.0020         0         0
         0    0.0110    0.0320    0.0260    0.0070    0.0010
    0.0010    0.0260    0.1410    0.1750    0.0430    0.0060
         0    0.0360    0.1620    0.1940    0.0370    0.0040
         0    0.0040    0.0300    0.0370    0.0100    0.0010
         0    0.0030    0.0040    0.0040    0.0010         0


Xedges =

   -4.0000   -2.7000   -1.4000   -0.1000    1.2000    2.5000    3.8000


Yedges =

   -4.0000   -2.7000   -1.4000   -0.1000    1.2000    2.5000    3.8000
```

Determine Bin Placement

Distribute 1,000 random integer pairs between -10 and 10 into bins, and specify `BinMethod` as `'integers'` to use unit-width bins centered on integers. Specify five outputs for `histcounts2` to return vectors representing the bin placement of the data.

```
x = randi([-10,10],1000,1);
y = randi([-10,10],1000,1);
[N,Xedges,Yedges,binX,binY] = histcounts2(x,y,'BinMethod','integers');
```

Determine which bin the value `(x(3),y(3))` falls into.

```
[x(3),y(3)]
```

```
ans =

    -8    10
```

```
bin = [binX(3) binY(3)]
```

```
bin =

     3    21
```

Input Arguments

X,Y — Data to distribute among bins (as separate arguments)

vectors | matrices | multidimensional arrays

Data to distribute among bins, specified as separate arguments of vectors, matrices, or multidimensional arrays. X and Y must have the same size.

Corresponding elements in X and Y specify the *x* and *y* coordinates of 2-D data points, [X(k),Y(k)]. The data types of X and Y can be different.

histcounts2 ignores all NaN values. Similarly, histcounts2 ignores Inf and -Inf values unless the bin edges explicitly specify Inf or -Inf as a bin edge.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical

nbins — Number of bins in each dimension

scalar | vector

Number of bins in each dimension, specified as a positive scalar integer or two-element vector of positive integers. If you do not specify nbins, then histcounts2 automatically calculates how many bins to use based on the values in X and Y:

- If nbins is a scalar, then histcounts2 uses that many bins in each dimension.
- If nbins is a vector, then nbins(1) specifies the number of bins in the *x*-dimension and nbins(2) specifies the number of bins in the *y*-dimension.

Example: `[N,Xedges,Yedges] = histcounts2(X,Y,[15 20])` uses 15 bins in the `x`-dimension and 20 bins in the `y`-dimension.

`Xedges` — Bin edges in *x*-dimension

vector

Bin edges in *x*-dimension, specified as a vector. `Xedges(1)` is the first edge of the first bin in the *x*-dimension, and `Xedges(end)` is the outer edge of the last bin.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`Yedges` — Bin edges in *y*-dimension

vector

Bin edges in *y*-dimension, specified as a vector. `Yedges(1)` is the first edge of the first bin in the *y*-dimension, and `Yedges(end)` is the outer edge of the last bin.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `[N,Xedges,Yedges] = histcounts2(X,Y,'Normalization','probability')` normalizes the bin counts in `N`, such that `sum(N)` is 1.

`'BinMethod'` — Binning algorithm

`'auto'` (default) | `'scott'` | `'fd'` | `'integers'`

Binning algorithm, specified as one of the values in this table.

Value	Description
`'auto'`	The default `'auto'` algorithm chooses a bin width to cover the data range and reveal the shape of the underlying distribution.

Value	Description
`'scott'`	Scott's rule is optimal if the data is close to being jointly normally distributed. This rule is appropriate for most other distributions, as well. It uses a bin size of `[3.5*std(X(:))*numel(X)^(-1/4), 3.5*std(Y(:))*numel(Y)^(-1/4)]`.
`'fd'`	The Freedman-Diaconis rule is less sensitive to outliers in the data, and might be more suitable for data with heavy-tailed distributions. It uses a bin size of `[2*IQR(X(:))*numel(X)^(-1/4), 2*IQR(Y(:))*numel(Y)^(-1/4)]`, where `IQR` is the interquartile range.
`'integers'`	The integer rule is useful with integer data, as it creates bins centered on pairs of integers. It uses a bin width of 1 for each dimension and places bin edges halfway between integers. To avoid accidentally creating too many bins, you can use this rule to create a limit of 1024 bins (2^{10}). If the data range for either dimension is greater than 1024, then the integer rule uses wider bins instead.

Example: `[N,Xedges,Yedges] = histcounts2(X,Y,'BinMethod','integers')` uses 2-D bins centered on each pair of integers.

`'BinWidth'` — Width of bins in each dimension

vector

Width of bins in each dimension, specified as a two-element vector of positive integers, `[xWidth yWidth]`.

If you specify `BinWidth`, then `histcounts2` can use a maximum of 1024 bins (2^{10}) along each dimension. If the specified bin width requires more bins, then `histcounts2` uses a larger bin width corresponding to the maximum number of bins.

Example: `[N,Xedges,Yedges] = histcounts2(X,Y,'BinWidth',[5 10])` uses bins with size `5` in the `x`-dimension and size `10` in the `y`-dimension.

`'XBinLimits'` — Bin limits in *x*-dimension
two-element vector

Bin limits in *x*-dimension, specified as a two-element vector, `[xbmin,xbmax]`. The vector indicates the first and last bin edges in the *x*-dimension.

This option only bins data that falls within the bin limits inclusively, `X>=xbmin & X<=xbmax`.

`'YBinLimits'` — Bin limits in *y*-dimension
two-element vector

Bin limits in *y*-dimension, specified as a two-element vector, `[ybmin,ybmax]`. The vector indicates the first and last bin edges in the *y*-dimension.

This option only bins data that falls within the bin limits inclusively, `Y>=ybmin & Y<=ybmax`.

`'Normalization'` — Type of normalization
`'count'` (default) | `'probability'` | `'countdensity'` | `'pdf'` | `'cumcount'` | `'cdf'`

Type of normalization, specified as one of the values in this table. For each bin `i`:

- v_i is the bin value.
- c_i is the number of elements in the bin.
- $A_i = w_{xi} \cdot w_{yi}$ is the area of each bin, computed using the *x* and *y* bin widths.
- N is the number of elements in the input data. This value can be greater than the binned data if the data contains `NaN` values, or if some of the data lies outside the bin limits.

Value	Bin Values	Notes
`'count'` (default)	$v_i = c_i$	• Count or frequency of observations. • Sum of bin values is less than or equal

Value	Bin Values	Notes
		to `numel(X)` and `numel(y)`. The sum is less than `numel(X)` only when some of the input data is not included in the bins.
`'countdensity'`	$v_i = \frac{c_i}{A_i}$	• Count or frequency scaled by area of bin. • The sum of the bin volumes, (N value * Area of bin), is less than or equal to `numel(X)` and `numel(Y)`.
`'cumcount'`	$v_i = \sum_{j=1}^{i} c_j$	• Cumulative count. Each bin value is the cumulative number of observations in each bin and all previous bins in both the x and y dimensions. • `N(end,end)` is less than or equal to `numel(X)` and `numel(Y)`.
`'probability'`	$v_i = \frac{c_i}{N}$	• Relative probability. • `sum(N(:))` is less than or equal to `1`.
`'pdf'`	$v_i = \frac{c_i}{N \cdot A_i}$	• Probability density function estimate. • The sum of the bin volumes, (N value * Area of bin), is less than or equal to `1`.

Value	Bin Values	Notes
`'cdf'`	$v_i = \sum_{j=1}^{i} \frac{c_j}{N}$	• Cumulative density function estimate. • `N(end,end)` is less than or equal to `1`.

Example: `[N,Xedges,Yedges] = histcounts2(X,Y,'Normalization','pdf')` bins the data using the probability density function estimate for `X` and `Y`.

Output Arguments

N — Bin counts

array

Bin counts, returned as a numeric array.

The bin inclusion scheme for the different numbered bins in `N`, as well as their relative orientation to the *x*-axis and *y*-axis, is

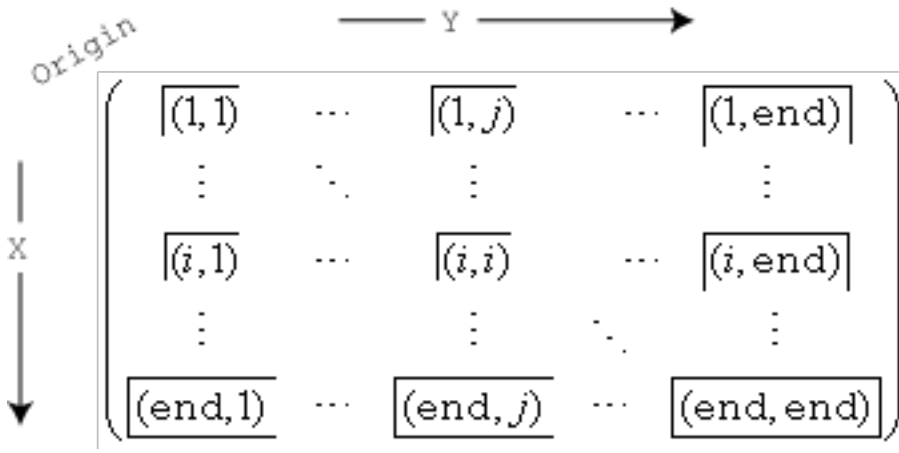

For example, the `(1,1)` bin includes values that fall on the first edge in each dimension, and the last bin in the bottom right includes values that fall on any of its edges.

Xedges — Bin edges in *x*-dimension

vector

Bin edges in *x*-dimension, returned as a vector. `Xedges(1)` is the first bin edge in the *x*-dimension and `Xedges(end)` is the last bin edge.

`Yedges` — Bin edges in *y*-dimension
vector

Bin edges in *y*-dimension, returned as a vector. `Yedges(1)` is the first bin edge in the *y*-dimension and `Yedges(end)` is the last bin edge.

`binX` — Bin index in *x*-dimension
array

Bin index in *x*-dimension, returned as a numeric array of the same size as `X`. Corresponding elements in `binX` and `binY` describe which numbered bin contains the corresponding values in `X` and `Y`. A value of `0` in `binX` or `binY` indicates an element that does not belong to any of the bins (such as a `NaN` value).

For example, `binX(1)` and `binY(1)` describe the bin placement for the value `[X(1),Y(1)]`.

`binY` — Bin index in *y*-dimension
array

Bin index in *y*-dimension, returned as a numeric array of the same size as `Y`. Corresponding elements in `binX` and `binY` describe which numbered bin contains the corresponding values in `X` and `Y`. A value of `0` in `binX` or `binY` indicates an element that does not belong to any of the bins (such as a `NaN` value).

For example, `binX(1)` and `binY(1)` describe the bin placement for the value `[X(1),Y(1)]`.

See Also

See Also

`discretize` | `fewerbins` | `histcounts` | `histogram` | `histogram2` | `morebins`

Introduced in R2015b

histogram

Histogram plot

Syntax

```
histogram(X)
histogram(X,nbins)
histogram(X,edges)
histogram('BinEdges',edges,'BinCounts',counts)

histogram(C)
histogram(C,Categories)
histogram('Categories',Categories,'BinCounts',counts)

histogram( ___ ,Name,Value)
histogram(ax, ___ )
h = histogram( ___ )
```

Description

`histogram(X)` creates a histogram plot of `X`. The `histogram` function uses an automatic binning algorithm that returns bins with a uniform width, chosen to cover the range of elements in `X` and reveal the underlying shape of the distribution. `histogram` displays the bins as rectangles such that the height of each rectangle indicates the number of elements in the bin.

`histogram(X,nbins)` uses a number of bins specified by the scalar, `nbins`.

`histogram(X,edges)` sorts `X` into bins with the bin edges specified by the vector, `edges`. Each bin includes the left edge, but does not include the right edge, except for the last bin which includes both edges.

`histogram('BinEdges',edges,'BinCounts',counts)` manually specifies bin edges and associated bin counts. `histogram` plots the specified bin counts and does not do any data binning.

`histogram(C)`, where `C` is a categorical array, plots a histogram with a bar for each category in `C`.

`histogram(C,Categories)` plots only the subset of categories specified by `Categories`.

`histogram('Categories',Categories,'BinCounts',counts)` manually specifies categories and associated bin counts. `histogram` plots the specified bin counts and does not do any data binning.

`histogram( ___ ,Name,Value)` specifies additional options with one or more `Name,Value` pair arguments using any of the previous syntaxes. For example, you can specify `'BinWidth'` and a scalar to adjust the width of the bins, or `'Normalization'` with a valid option (`'count'`, `'probability'`, `'countdensity'`, `'pdf'`, `'cumcount'`, or `'cdf'`) to use a different type of normalization. For a list of properties, see Histogram Properties.

`histogram(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = histogram( ___ )` returns a `Histogram` object. Use this to inspect and adjust the properties of the histogram. For a list of properties, see Histogram Properties.

Examples

Histogram of Vector

Generate 10,000 random numbers and create a histogram. The `histogram` function automatically chooses an appropriate number of bins to cover the range of values in `x` and show the shape of the underlying distribution.

```
x = randn(10000,1);
h = histogram(x)
```

```
h = 
  Histogram with properties:

             Data: [10000×1 double]
           Values: [2 2 1 6 7 17 29 57 86 133 193 271 331 421 540 613 730 748 776 806 8
```

```
          NumBins: 37
         BinEdges: [1×38 double]
         BinWidth: 0.2000
        BinLimits: [-3.8000 3.6000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0 0 0]

  Show all properties
```

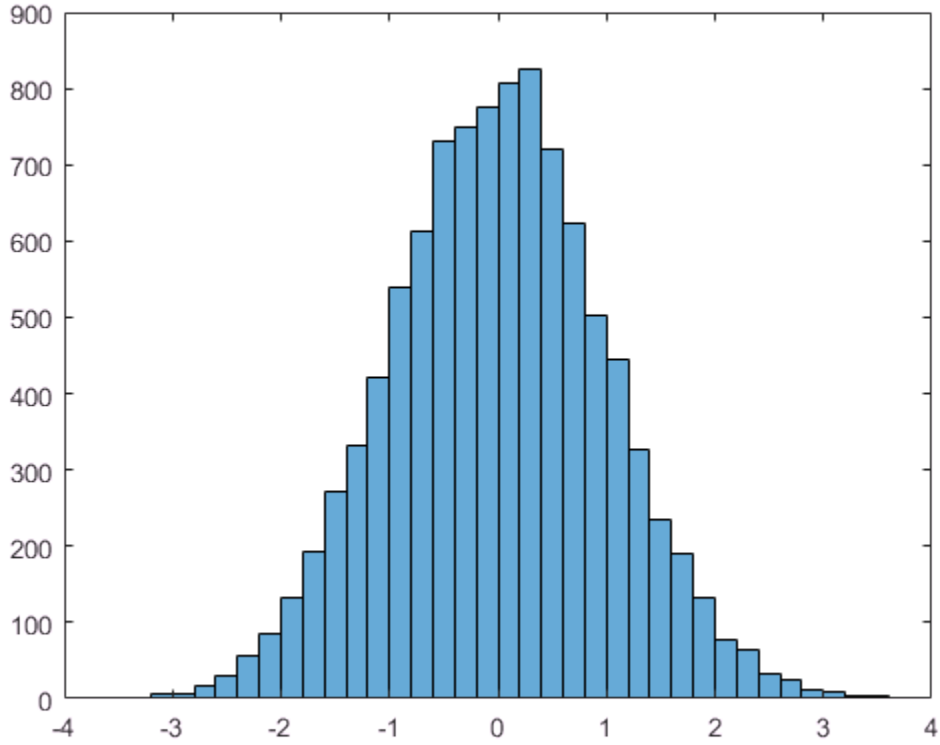

When you specify an output argument to the `histogram` function, it returns a histogram object. You can use this object to inspect the properties of the histogram, such as the number of bins or the width of the bins.

Find the number of histogram bins.

```
nbins = h.NumBins
```

```
nbins = 37
```

Specify Number of Histogram Bins

Plot a histogram of 1,000 random numbers sorted into 25 equally spaced bins.

```
x = randn(1000,1);
nbins = 25;
h = histogram(x,nbins)
```

```
h = 
  Histogram with properties:

             Data: [1000×1 double]
           Values: [1 3 0 6 14 19 31 54 74 80 92 122 104 115 88 80 38 32 21 9 5 5 5 0 2
          NumBins: 25
         BinEdges: [-3.4000 -3.1200 -2.8400 -2.5600 -2.2800 -2 -1.7200 -1.4400 -1.1600
         BinWidth: 0.2800
        BinLimits: [-3.4000 3.6000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0 0 0]

  Show all properties
```

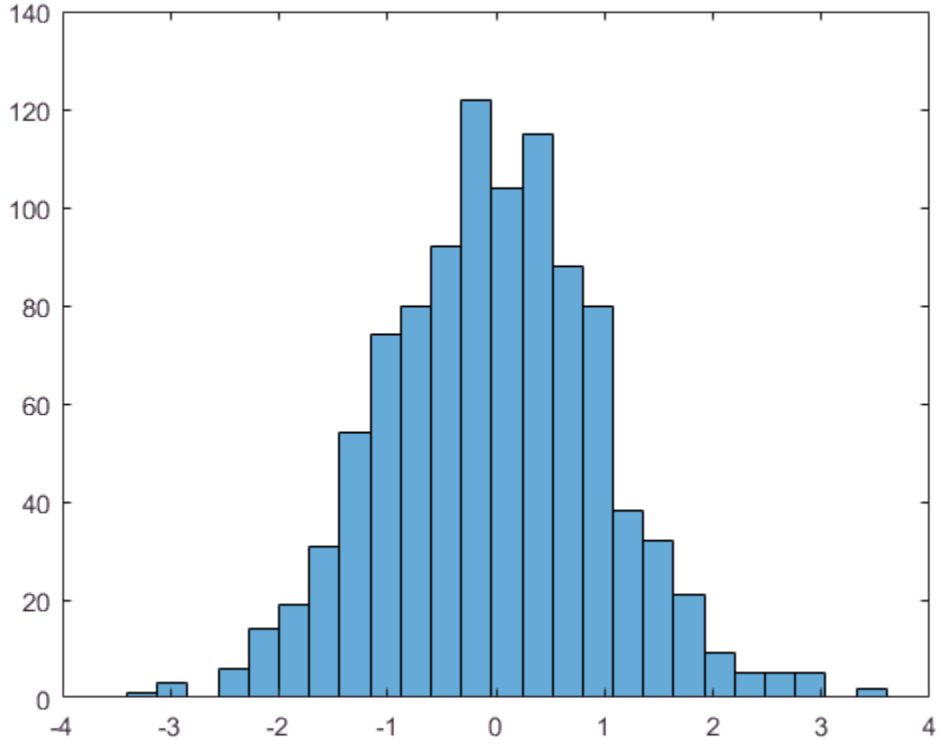

Find the bin counts.

```
counts = h.Values
```

```
counts =

     1     3     0     6    14    19    31    54    74    80    92   122   104   115
```

Change Number of Histogram Bins

Generate 1,000 random numbers and create a histogram.

```
X = randn(1000,1);
```

```
h = histogram(X)
```

```
h 
  Histogram with properties:

             Data: [1000×1 double]
           Values: [3 1 2 15 17 27 53 79 85 101 127 110 124 95 67 32 27 16 6 6 4 1 2]
          NumBins: 23
         BinEdges: [-3.3000 -3.0000 -2.7000 -2.4000 -2.1000 -1.8000 -1.5000 -1.2000 -0
         BinWidth: 0.3000
        BinLimits: [-3.3000 3.6000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0 0 0]

  Show all properties
```

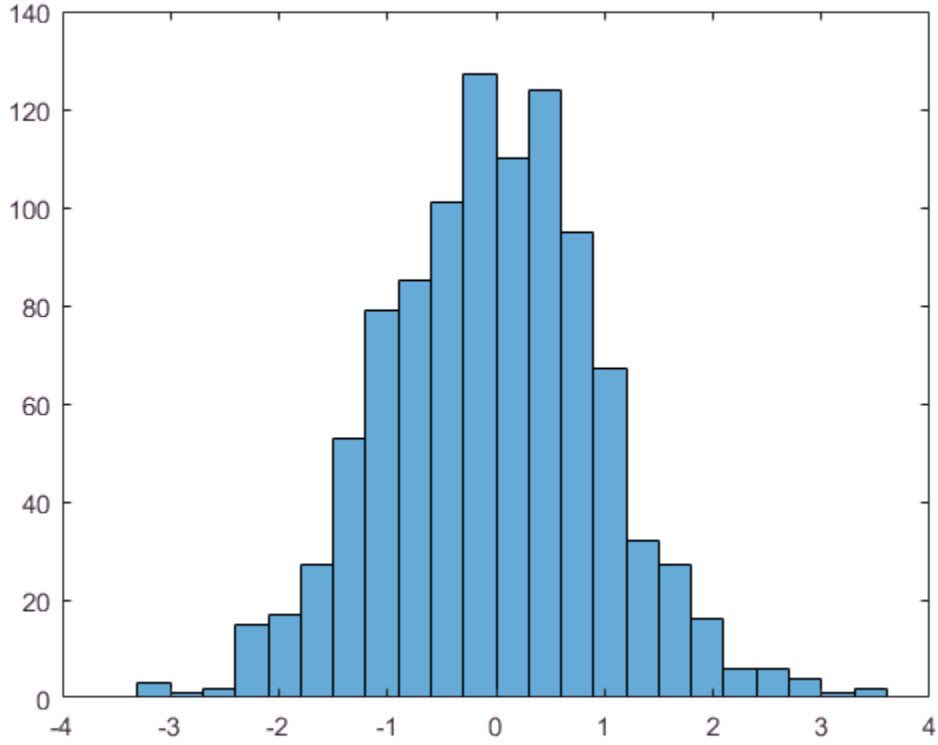

Use the `morebins` function to coarsely adjust the number of bins.

```
Nbins = morebins(h);
Nbins = morebins(h)
```

```
Nbins = 29
```

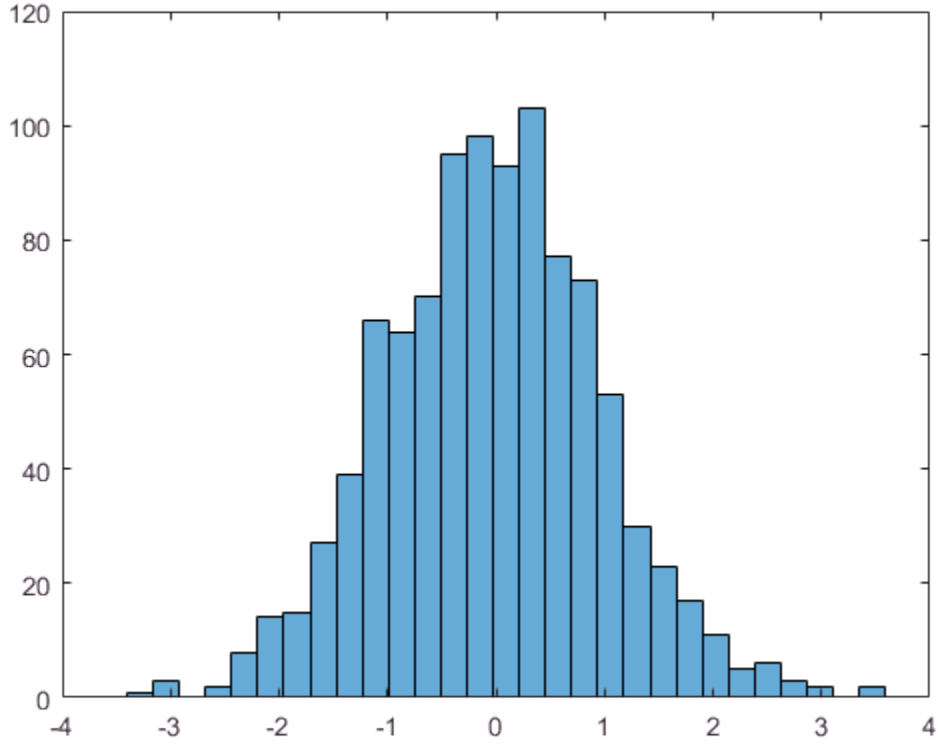

Adjust the bins at a fine grain level by explicitly setting the number of bins.

```
h.NumBins = 31;
```

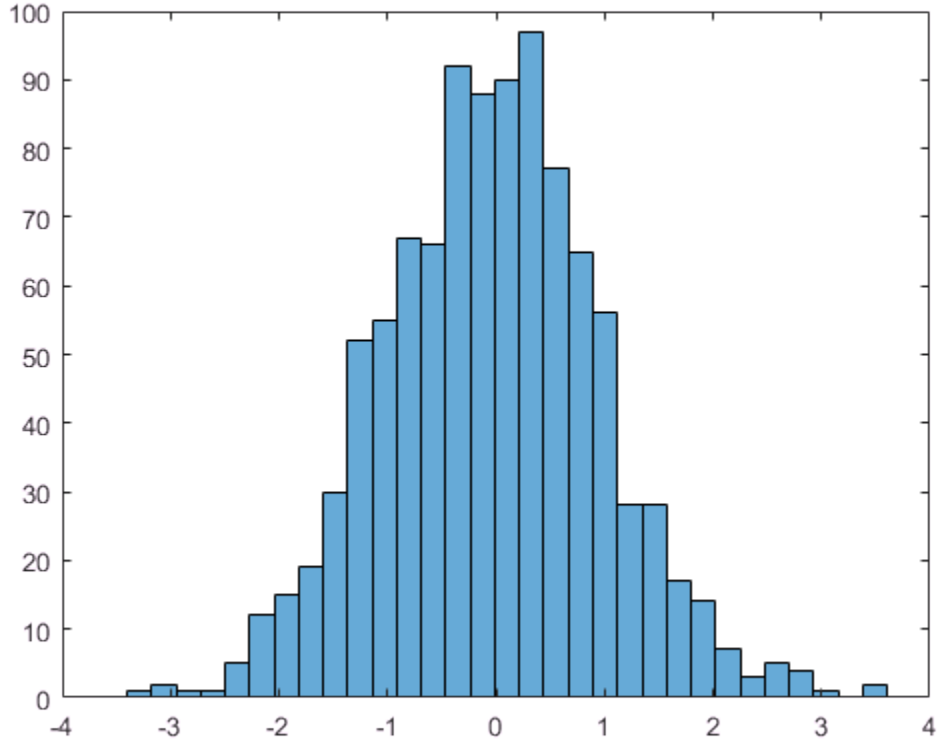

Specify Bin Edges of Histogram

Generate 1,000 random numbers and create a histogram. Specify the bin edges as a vector with wide bins on the edges of the histogram to capture the outliers that do not satisfy $|x| < 2$. The first vector element is the left edge of the first bin, and the last vector element is the right edge of the last bin.

```
x = randn(1000,1);
edges = [-10 -2:0.25:2 10];
h = histogram(x,edges);
```

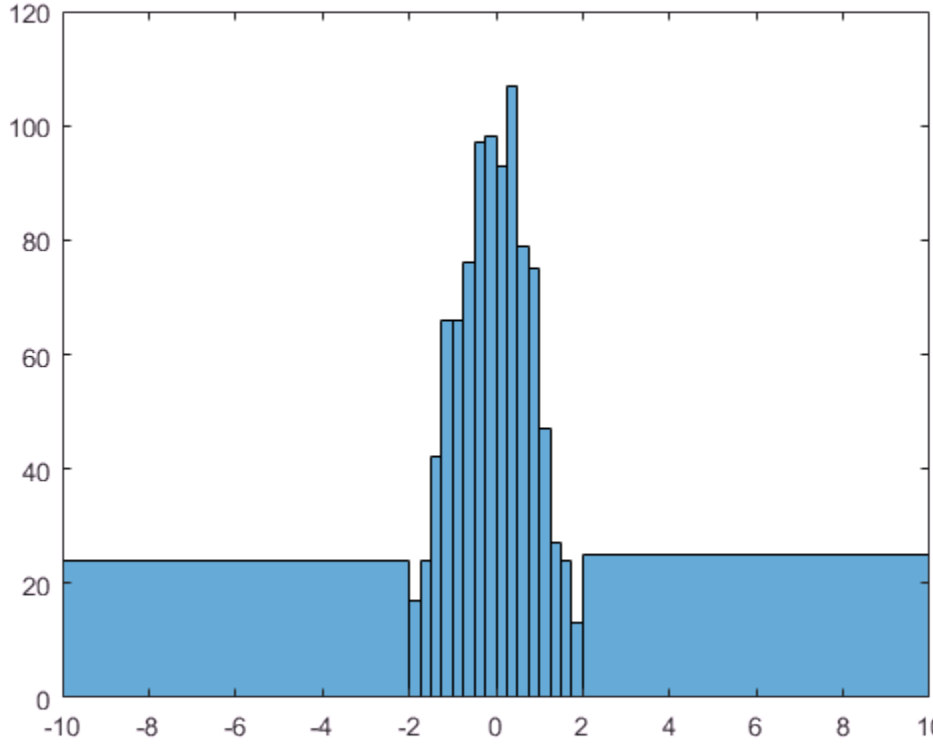

Specify the `Normalization` property as `'countdensity'` to flatten out the bins containing the outliers. Now, the *area* of each bin (rather than the height) represents the frequency of observations in that interval.

```
h.Normalization = 'countdensity';
```

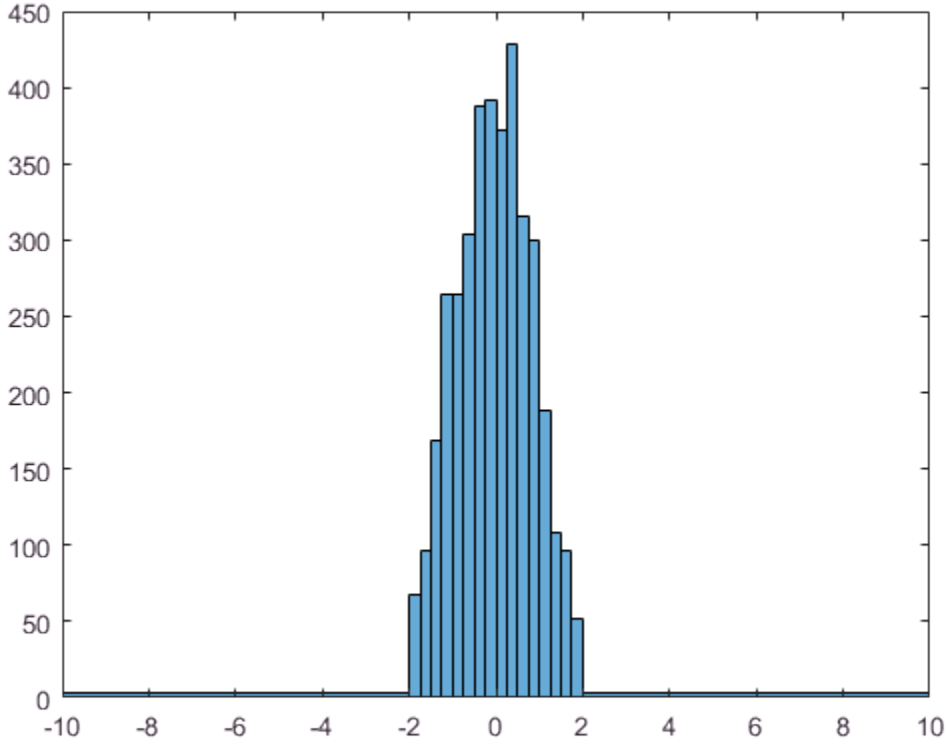

Plot Categorical Histogram

Create a categorical vector that represents votes. The categories in the vector are `'yes'`, `'no'`, or `'undecided'`.

```
A = [0 0 1 1 1 0 0 0 0 NaN NaN 1 0 0 0 1 0 1 0 1 0 0 0 1 1 1 1];
C = categorical(A,[1 0 NaN],{'yes','no','undecided'})
```

```
C = 1×27 categorical array
     no      no      yes      yes      yes      no      no      no      no      undeci
```

Plot a categorical histogram of the votes, using a relative bar width of `0.5`.

```
h = histogram(C,'BarWidth',0.5)

h =
  Histogram with properties:

              Data: [no    no    yes    yes    yes    no    no    no    no    undecidec
            Values: [11 14 2]
    NumDisplayBins: 3
        Categories: {'yes'  'no'  'undecided'}
      DisplayOrder: 'data'
     Normalization: 'count'
      DisplayStyle: 'bar'
         FaceColor: 'auto'
         EdgeColor: [0 0 0]

  Show all properties
```

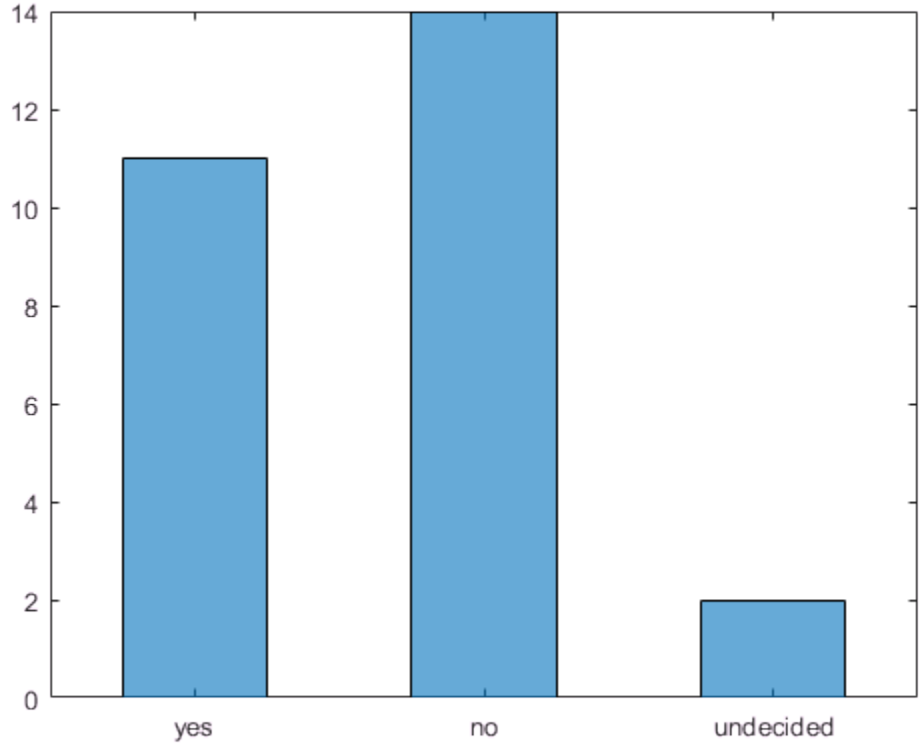

Histogram with Specified Normalization

Generate 1,000 random numbers and create a histogram using the `'probability'` normalization.

```
x = randn(1000,1);
h = histogram(x,'Normalization','probability')
```

```
h 
  Histogram with properties:

             Data: [1000×1 double]
           Values: [0.0030 1.0000e-03 0.0020 0.0150 0.0170 0.0270 0.0530 0.0790 0.0850
```

```
          NumBins: 23
         BinEdges: [-3.3000 -3.0000 -2.7000 -2.4000 -2.1000 -1.8000 -1.5000 -1.2000 -0
         BinWidth: 0.3000
        BinLimits: [-3.3000 3.6000]
    Normalization: 'probability'
        FaceColor: 'auto'
        EdgeColor: [0 0 0]

  Show all properties
```

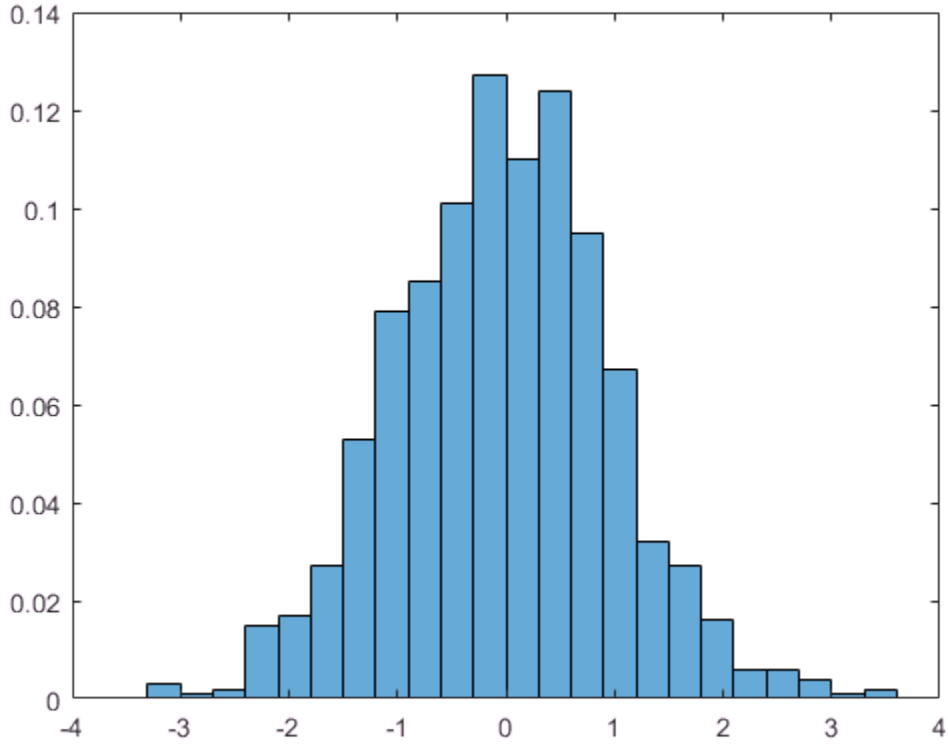

Compute the sum of the bar heights. With this normalization, the height of each bar is equal to the probability of selecting an observation within that bin interval, and the height of all of the bars sums to 1.

```
S = sum(h.Values)
```

```
S = 1
```

Plot Multiple Histograms

Generate two vectors of random numbers and plot a histogram for each vector in the same figure.

```
x = randn(2000,1);
y = 1 + randn(5000,1);
h1 = histogram(x);
hold on
h2 = histogram(y);
```

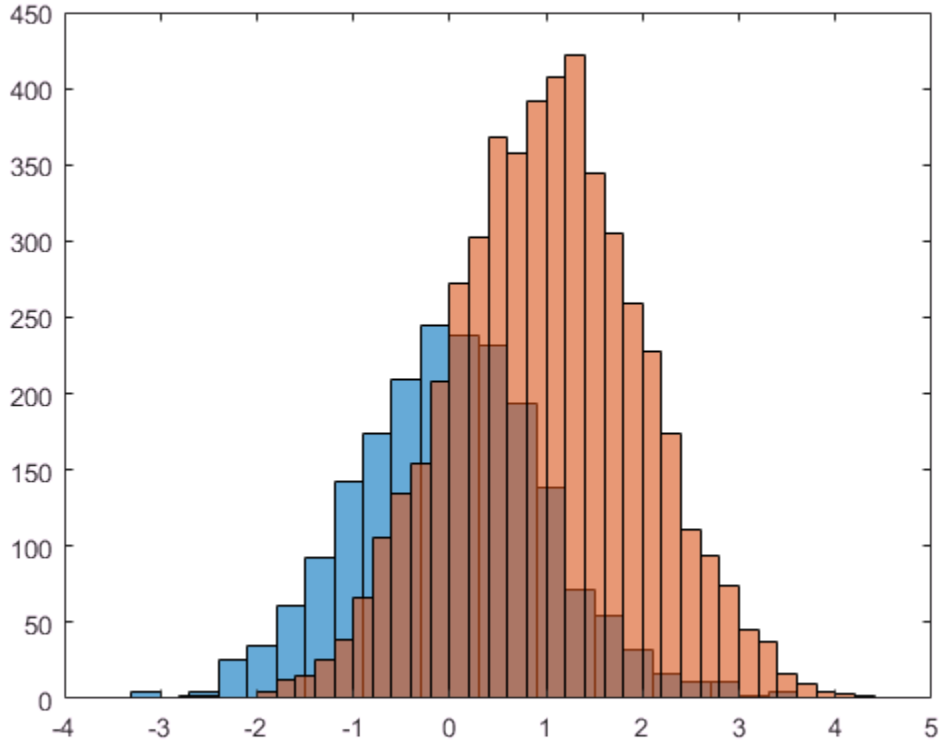

Since the sample size and bin width of the histograms are different, it is difficult to compare them. Normalize the histograms so that all of the bar heights add to 1, and use a uniform bin width.

```
h1.Normalization = 'probability';
h1.BinWidth = 0.25;
h2.Normalization = 'probability';
h2.BinWidth = 0.25;
```

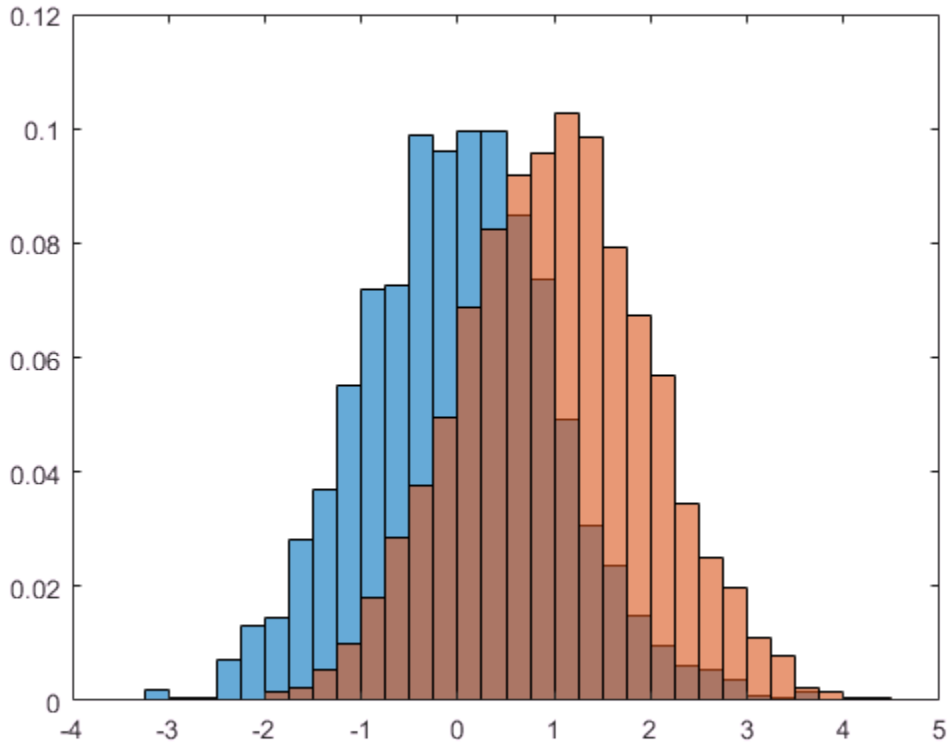

Adjust Histogram Properties

Generate 1,000 random numbers and create a histogram. Return the histogram object to adjust the properties of the histogram without recreating the entire plot.

```
x = randn(1000,1);
h = histogram(x)
```

```
h 
  Histogram with properties:

             Data: [1000×1 double]
           Values: [3 1 2 15 17 27 53 79 85 101 127 110 124 95 67 32 27 16 6 6 4 1 2]
          NumBins: 23
         BinEdges: [-3.3000 -3.0000 -2.7000 -2.4000 -2.1000 -1.8000 -1.5000 -1.2000 -0
         BinWidth: 0.3000
        BinLimits: [-3.3000 3.6000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0 0 0]

  Show all properties
```

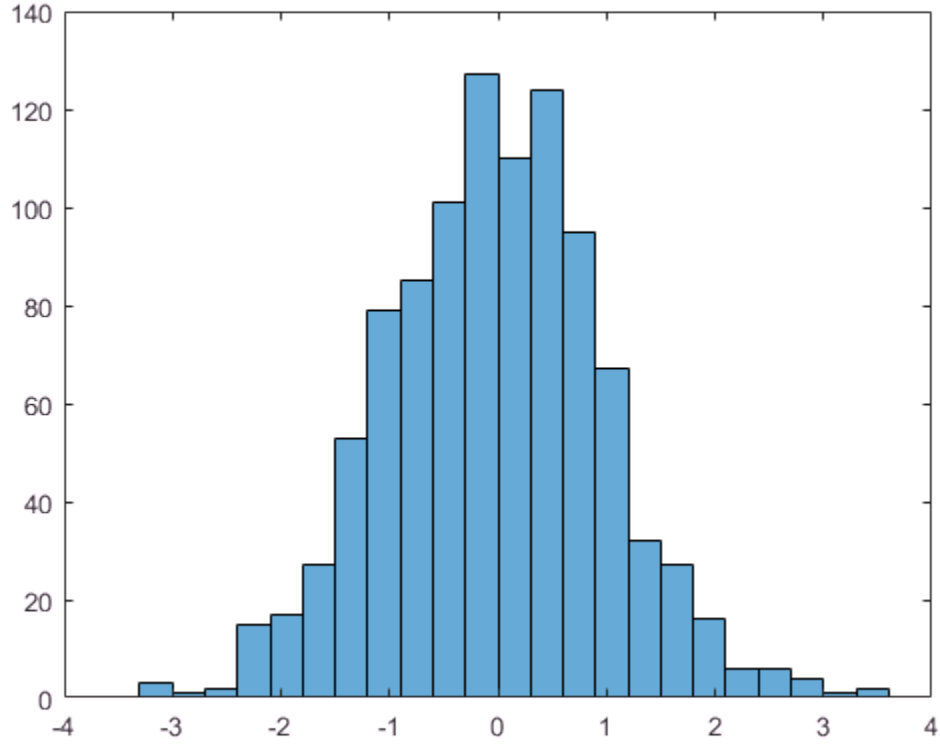

Specify exactly how many bins to use.

```
h.NumBins = 15;
```

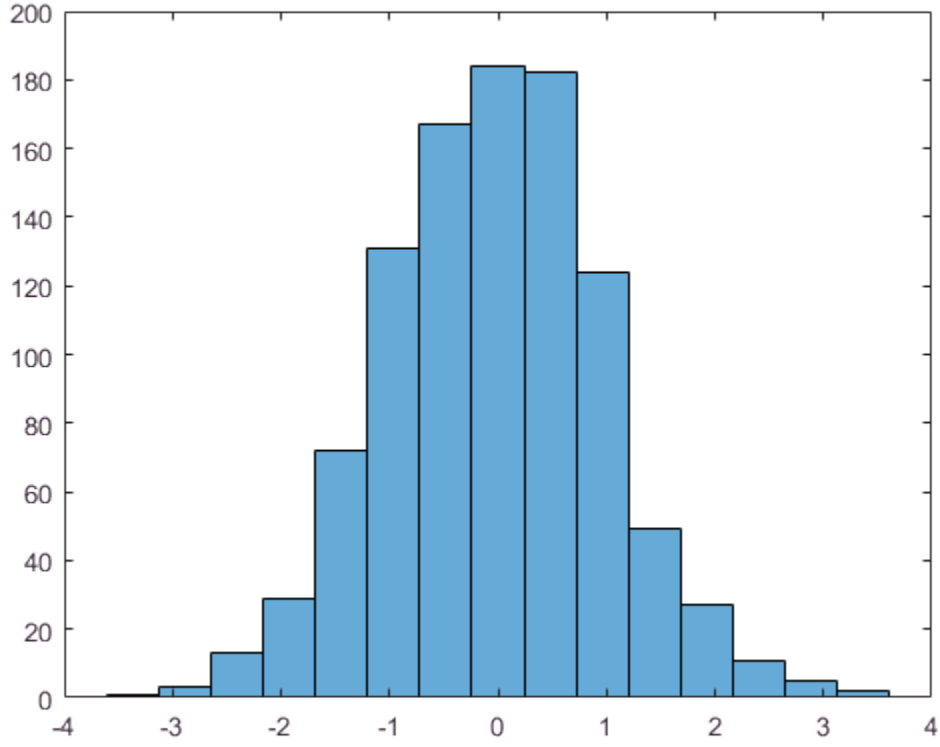

Specify the edges of the bins with a vector. The first value in the vector is the left edge of the first bin. The last value is the right edge of the last bin.

```
h.BinEdges = [-3:3];
```

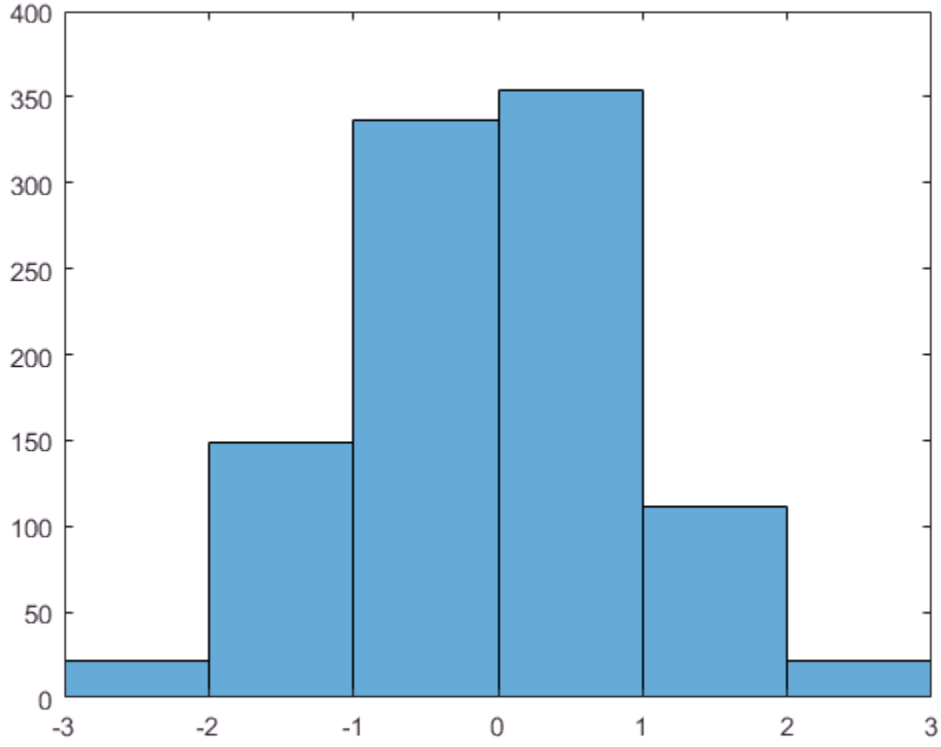

Change the color of the histogram bars.

```
h.FaceColor = [0 0.5 0.5];
h.EdgeColor = 'r';
```

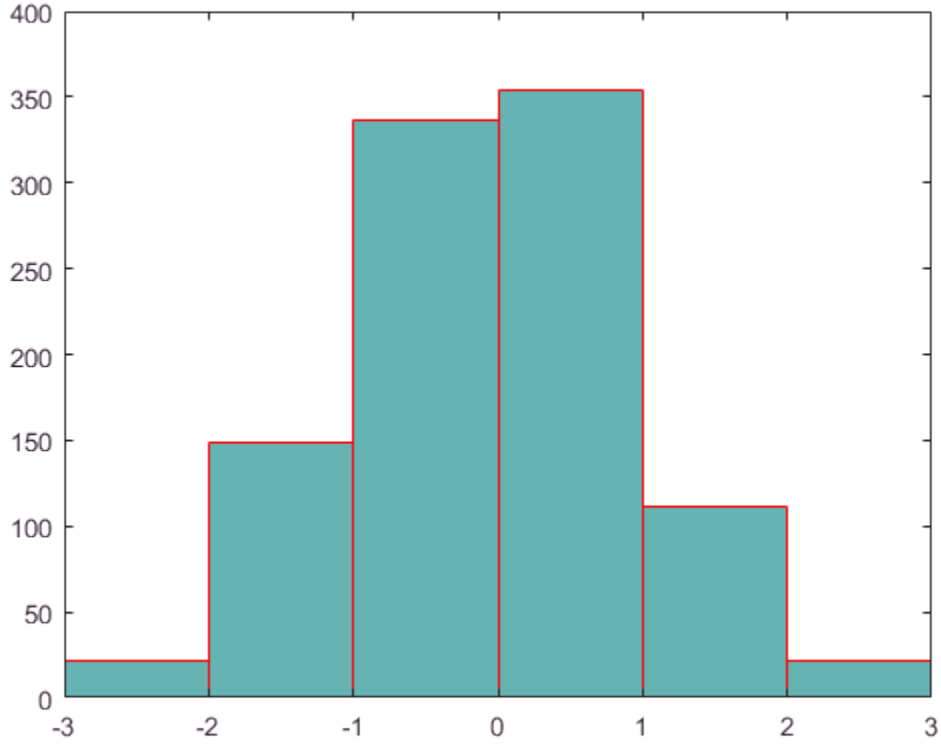

Determine Underlying Probability Distribution

Generate 5,000 normally distributed random numbers with a mean of 5 and a standard deviation of 2. Plot a histogram with `Normalization` set to `'pdf'` to produce an estimation of the probability density function.

```
x = 2*randn(5000,1) + 5;
histogram(x,'Normalization','pdf')
```

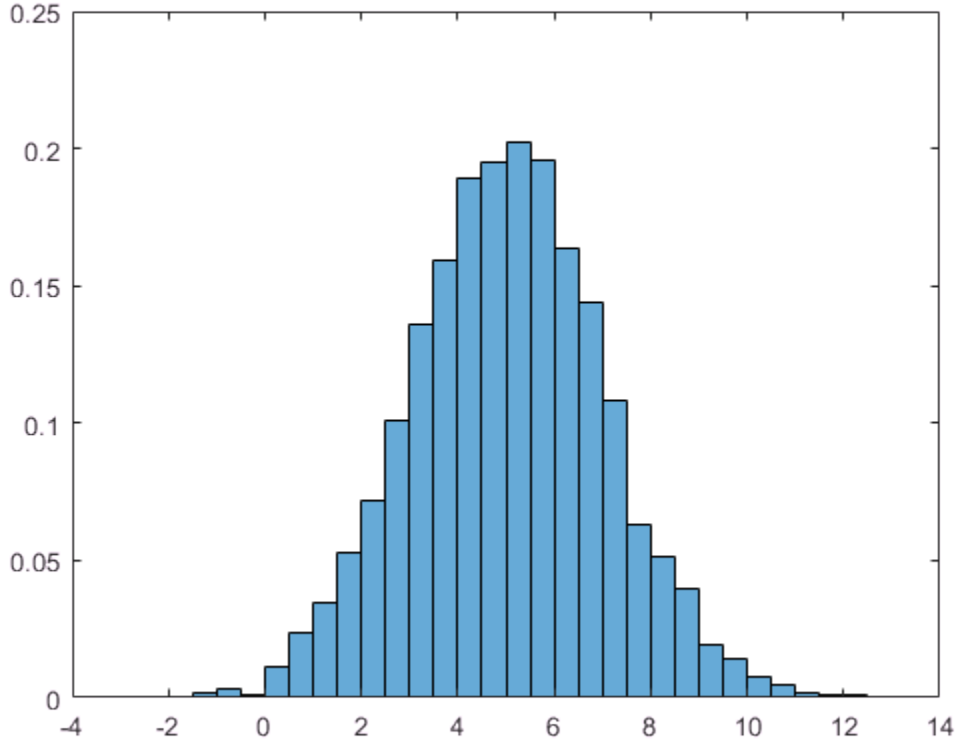

In this example, the underlying distribution for the normally distributed data is known. You can, however, use the `'pdf'` histogram plot to determine the underlying probability distribution of the data by comparing it against a known probability density function.

The probability density function for a normal distribution with mean μ, standard deviation σ, and variance σ^2 is

$$f(x,\mu,\sigma) = \frac{1}{\sigma\sqrt{2\pi}} \exp\left[-\frac{(x-\mu)^2}{2\sigma^2}\right].$$

Overlay a plot of the probability density function for a normal distribution with a mean of 5 and a standard deviation of 2.

```
hold on
y = -5:0.1:15;
mu = 5;
sigma = 2;
f = exp(-(y-mu).^2./(2*sigma^2))./(sigma*sqrt(2*pi));
plot(y,f,'LineWidth',1.5)
```

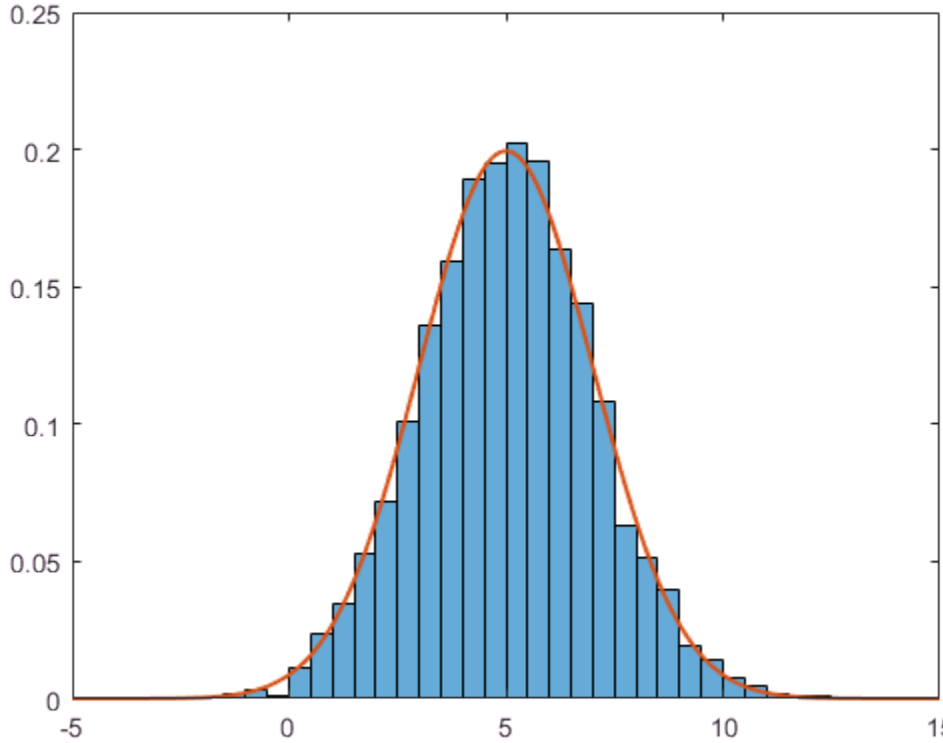

- “Plot Categorical Data”
- “Control Categorical Histogram Display”

Input Arguments

X — Data to distribute among bins

vector | matrix | multidimensional array

Data to distribute among bins, specified as a vector, matrix, or multidimensional array. If X is not a vector, then histogram treats it as a single column vector, X(:), and plots a single histogram.

histogram ignores all NaN values. Similarly, histogram ignores Inf and -Inf values, unless the bin edges explicitly specify Inf or -Inf as a bin edge.

Note: If X contains integers of type int64 or uint64 that are larger than flintmax, then it is recommended that you explicitly specify the histogram bin edges. histogram automatically bins the input data using double precision, which lacks integer precision for numbers greater than flintmax.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | datetime | duration

C — Categorical data

categorical array

Categorical data, specified as a categorical array. histogram ignores undefined categorical values.

Data Types: categorical

nbins — Number of bins

positive integer

Number of bins, specified as a positive integer. If you do not specify nbins, then histogram automatically calculates how many bins to use based on the values in X.

Example: histogram(X,15) creates a histogram with 15 bins.

edges — Bin edges

vector

Bin edges, specified as a vector. edges(1) is the left edge of the first bin, and edges(end) is the right edge of the last bin.

The value `X(i)` is in the `k`th bin if `edges(k)` ≤ `X(i)` < `edges(k+1)`. The last bin also includes the right bin edge, so that it contains `X(i)` if `edges(end-1)` ≤ `X(i)` ≤ `edges(end)`.

For datetime and duration data, `edges` must be a datetime or duration vector in monotonically increasing order.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `datetime` | `duration`

`Categories` — Categories included in histogram

cell array of character vectors | categorical vector

Note: This option only applies to categorical histograms.

Categories included in histogram, specified as a cell array of character vectors or categorical vector.

- If you specify an input categorical array `C`, then by default, `histogram` plots a bar for each category in `C`. In that case, use `Categories` to specify a unique subset of the categories instead.
- If you specify bin counts, then `Categories` specifies the associated category names for the histogram.

Example: `h = histogram(C,{'Large','Small'})` plots only the categorical data in the categories `'Large'` and `'Small'`.

Example: `histogram('Categories',{'Yes','No','Maybe'},'BinCounts',[22 18 3])` plots a histogram that has three categories with the associated bin counts.

Example: `h.Categories` queries the categories that are in histogram object `h`.

Data Types: `cell` | `categorical`

`counts` — Bin counts

vector

Bin counts, specified as a vector. Use this input to pass bin counts to `histogram` when the bin counts calculation is performed separately and you do not want `histogram` to do any data binning.

The length of `counts` must be equal to the number of bins.

- For numeric histograms, the number of bins is `length(edges)-1`.
- For categorical histograms, the number of bins is equal to the number of categories.

Example: `histogram('BinEdges',-2:2,'BinCounts',[5 8 15 9])`

Example: `histogram('Categories',{'Yes','No','Maybe'},'BinCounts',[22 18 3])`

`ax` — Axes object
axes object

Axes object. If you do not specify an axes, then the `histogram` function uses the current axes (`gca`).

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `histogram(X,'BinWidth',5)`

The histogram properties listed here are only a subset. For a complete list, see Histogram Properties.

`'BarWidth'` — Relative width of categorical bars
`0.9` (default) | scalar in range `[0,1]`

Note: This option only applies to histograms of categorical data.

Relative width of categorical bars, specified as a scalar value in the range `[0,1]`. Use this property to control the separation of categorical bars within the histogram. The default value is `0.9`, which means that the bar width is 90% of the space from the previous bar to the next bar, with 5% of that space on each side.

If you set this property to `1`, then adjacent bars touch.

Example: `0.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'BinLimits'` — Bin limits

two-element vector

Bin limits, specified as a two-element vector, `[bmin,bmax]`. This option plots a histogram using the values in the input array, `X`, that fall between `bmin` and `bmax` inclusive. That is, `X(X>=bmin & X<=bmax)`.

This option does not apply to histograms of categorical data.

Example: `histogram(X,'BinLimits',[1,10])` plots a histogram using only the values in `X` that are between `1` and `10` inclusive.

`'BinLimitsMode'` — Selection mode for bin limits

`'auto'` (default) | `'manual'`

Selection mode for bin limits, specified as `'auto'` or `'manual'`. The default value is `'auto'`, so that the bin limits automatically adjust to the data.

If you explicitly specify either `BinLimits` or `BinEdges`, then `BinLimitsMode` is automatically set to `'manual'`. In that case, specify `BinLimitsMode` as `'auto'` to rescale the bin limits to the data.

This option does not apply to histograms of categorical data.

`'BinMethod'` — Binning algorithm

`'auto'` (default) | `'scott'` | `'fd'` | `'integers'` | `'sturges'` | `'sqrt'` | ...

Binning algorithm, specified as one of the values in this table.

Value	Description
`'auto'`	The default `'auto'` algorithm chooses a bin width to cover the data range and reveal the shape of the underlying distribution.
`'scott'`	Scott's rule is optimal if the data is close to being normally distributed. This rule is appropriate for most other distributions, as well. It uses a bin width of `3.5*std(X(:))*numel(X)^(-1/3)`.

Value	Description
`'fd'`	The Freedman-Diaconis rule is less sensitive to outliers in the data, and might be more suitable for data with heavy-tailed distributions. It uses a bin width of `2*IQR(X(:))*numel(X)^(-1/3)`, where `IQR` is the interquartile range of `X`.
`'integers'`	The integer rule is useful with integer data, as it creates a bin for each integer. It uses a bin width of 1 and places bin edges halfway between integers. To avoid accidentally creating too many bins, you can use this rule to create a limit of 65536 bins (2^{16}). If the data range is greater than 65536, then the integer rule uses wider bins instead. **Note:** `'integers'` does not support datetime or duration data.
`'sturges'`	Sturges' rule is popular due to its simplicity. It chooses the number of bins to be `ceil(1 + log2(numel(X)))`.
`'sqrt'`	The Square Root rule is widely used in other software packages. It chooses the number of bins to be `ceil(sqrt(numel(X)))`.

For datetime data, the bin method can be one of these units of time:

`'second'`	`'month'`
`'minute'`	`'quarter'`
`'hour'`	`'year'`
`'day'`	`'decade'`
`'week'`	`'century'`

For duration data, the bin method can be one of these units of time:

'second'	'day'
'minute'	'year'
'hour'	

This option does not apply to histograms of categorical data.

Note: If you set the BinLimits, NumBins, BinEdges, or BinWidth property, then the BinMethod property is set to 'manual'.

Example: histogram(X,'BinMethod','integers') creates a histogram with the bins centered on integers.

'BinWidth' — Width of bins

scalar

Width of bins, specified as a scalar. When you specify BinWidth, then histogram can use a maximum of 65,536 bins (or 2^{16}). If instead the specified bin width requires more bins, then histogram uses a larger bin width corresponding to the maximum number of bins.

For datetime and duration data, the value of 'BinWidth' can be a scalar duration or calendar duration.

This option does not apply to histograms of categorical data.

Example: histogram(X,'BinWidth',5) uses bins with a width of 5.

'DisplayOrder' — Category display order

'data' (default) | 'ascend' | 'descend'

Category display order, specified as 'ascend', 'descend', or 'data'. With 'ascend' or 'descend', the histogram displays with increasing or decreasing bar heights. The default 'data' value uses the category order in the input data, C.

This option only works with categorical data.

'DisplayStyle' — Histogram display style

'bar' (default) | 'stairs'

Histogram display style, specified as either `'bar'` or `'stairs'`. Specify `'stairs'` to display a stairstep plot, which displays the outline of the histogram without filling the interior.

The default value of `'bar'` displays a histogram bar plot.

Example: `histogram(X,'DisplayStyle','stairs')` plots the outline of the histogram.

`'EdgeAlpha'` — Transparency of histogram bar edges

`1` (default) | scalar value between `0` and `1` inclusive

Transparency of histogram bar edges, specified as a scalar value between `0` and `1` inclusive. A value of `1` means fully opaque and `0` means completely transparent (invisible).

Example: `histogram(X,'EdgeAlpha',0.5)` creates a histogram plot with semi-transparent bar edges.

`'EdgeColor'` — Histogram edge color

`[0 0 0]` or black (default) | `'none'` | `'auto'` | RGB triplet or color name

Histogram edge color, specified as one of these values:

- `'none'` — Edges are not drawn.
- `'auto'` — Color of each edge is chosen automatically.
- RGB triplet or a color name — Edges use the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`

Long Name	Short Name	RGB Triplet
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `histogram(X,'EdgeColor','r')` creates a histogram plot with red bar edges.

`'FaceAlpha'` — Transparency of histogram bars

`0.6` (default) | scalar value between `0` and `1` inclusive

Transparency of histogram bars, specified as a scalar value between `0` and `1` inclusive. `histogram` uses the same transparency for all the bars of the histogram. A value of `1` means fully opaque and `0` means completely transparent (invisible).

Example: `histogram(X,'FaceAlpha',1)` creates a histogram plot with fully opaque bars.

`'FaceColor'` — Histogram bar color

`'auto'` (default) | `'none'` | RGB triplet or color name

Histogram bar color, specified as one of these values:

- `'none'` — Bars are not filled.
- `'auto'` — Histogram bar color is chosen automatically (default).
- RGB triplet or a color name — Bars are filled with the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]

Long Name	Short Name	RGB Triplet
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

If you specify `DisplayStyle` as `'stairs'`, then `histogram` does not use the `FaceColor` property.

Example: `histogram(X,'FaceColor','g')` creates a histogram plot with green bars.

`'LineStyle'` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Width of bar outlines
`0.5` (default) | positive value

Width of bar outlines, specified as a positive value in point units. One point equals 1/72 inch.

Example: `1.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'Normalization'` — Type of normalization
`'count'` (default) | `'probability'` | `'countdensity'` | `'pdf'` | `'cumcount'` | `'cdf'`

Type of normalization, specified as one of the values in this table. For each bin `i`:

- v_i is the bin value.
- c_i is the number of elements in the bin.
- w_i is the width of the bin.
- N is the number of elements in the input data. This value can be greater than the binned data if the data contains `NaN`, `NaT`, or `<undefined>` values, or if some of the data lies outside the bin limits.

Value	Bin Values	Notes
`'count'` (default)	$v_i = c_i$	• Count or frequency of observations. • Sum of bin values is less than or equal to `numel(X)`. The sum is less than `numel(X)` only when some of the input data is not included in the bins. • For categorical data, sum of bin values is less than or equal to either `numel(X)` or `sum(ismember(X(:),Categories))`
`'countdensity'`	$v_i = \frac{c_i}{w_i}$	• Count or frequency scaled by width of bin. • The area (height * width) of each bar is the number of observations in the bin. The sum of the bar areas is less than or equal to `numel(X)`. • For categorical histograms, this is the same as `'count'`.

Value	Bin Values	Notes
		Note: `'countdensity'` does not support datetime or duration data.
`'cumcount'`	$v_i = \sum_{j=1}^{i} c_j$	• Cumulative count. Each bin value is the cumulative number of observations in that bin and all previous bins. • The height of the last bar is less than or equal to `numel(X)`. • For categorical histograms, the height of the last bar is less than or equal to `numel(X)` or `sum(ismember(X(:),Categories))`
`'probability'`	$v_i = \frac{c_i}{N}$	• Relative probability. • The sum of the bar heights is less than or equal to `1`.
`'pdf'`	$v_i = \frac{c_i}{N \cdot w_i}$	• Probability density function estimate. • The area of each bar is the relative number of observations. The sum of the bar areas is less than or equal to `1`. • For categorical histograms, this is the same as `'probability'`. **Note:** `'pdf'` does not support datetime or duration data.

Value	Bin Values	Notes
`'cdf'`	$v_i = \sum_{j=1}^{i} \frac{c_j}{N}$	• Cumulative density function estimate. • The height of each bar is equal to the cumulative relative number of observations in the bin and all previous bins. The height of the last bar is less than or equal to 1. • For categorical data, the height of each bar is equal to the cumulative relative number of observations in each category and all previous categories.

Example: `histogram(X,'Normalization','pdf')` plots an estimate of the probability density function for `X`.

`'NumDisplayBins'` — Number of categories to display
scalar

Number of categories to display, specified as a scalar. You can change the ordering of categories displayed in the histogram using the `'DisplayOrder'` option.

This option only works with categorical data.

`'Orientation'` — Orientation of bars
`'vertical'` (default) | `'horizontal'`

Orientation of bars, specified as `'vertical'` or `'horizontal'`.

Example: `histogram(X,'Orientation','horizontal')` creates a histogram plot with horizontal bars.

`'ShowOthers'` — Toggle summary display of data belonging to undisplayed categories
`'off'` (default) | `'on'`

Toggle summary display of data belonging to undisplayed categories, specified as `'off'` or `'on'`. Set this option to `'on'` to display an additional bar in the histogram with the name `'Others'`. This extra bar counts all elements that do not belong to categories displayed in the histogram.

You can change the number of categories displayed in the histogram, as well as their order, using the `'NumDisplayBins'` and `'DisplayOrder'` options.

This option only works with categorical data.

Output Arguments

h — Histogram
object

Histogram, returned as an object. For more information, see histogram.

Tips

- Histogram plots created using `histogram` have a context menu in plot edit mode that enables interactive manipulations in the figure window. For example, you can use the context menu to interactively change the number of bins, align multiple histograms, or change the display order.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- Some input options are not supported. The allowed options are:
  - `'BinWidth'`

  - `'BinLimits'`
  - `'Normalization'`
  - `'DisplayStyle'`
  - `'BinMethod'` — The `'auto'` and `'scott'` bin methods are the same. The `'fd'` bin method is not supported.
  - `'EdgeAlpha'`
  - `'EdgeColor'`
  - `'FaceAlpha'`
  - `'FaceColor'`
  - `'LineStyle'`
  - `'LineWidth'`
  - `'Orientation'`
- Additionally, there is a cap on the maximum number of bars. The default maximum is 100.
- The `morebins` and `fewerbins` methods are not supported.
- Editing properties of the histogram object that require recomputing the bins is not supported.

For more information, see "Tall Arrays".

See Also

See Also

`discretize` | `fewerbins` | `histcounts` | `histcounts2` | `histogram2` | `morebins`

Topics

"Plot Categorical Data"
"Control Categorical Histogram Display"
histogram
"Replace Discouraged Instances of hist and histc"

Introduced in R2014b

histogram

Histogram bar plot for numeric data

Description

Histograms are a type of bar plot for numeric data that group the data into bins. After you create a histogram object, you can modify aspects of the histogram by changing its property values. This is particularly useful for quickly modifying the properties of the bins or changing the display.

Create Object

Specify an output argument with the `histogram` function to create a histogram object.

Properties

Histogram Properties	Control histogram appearance and behavior

Object Functions

morebins	Increase number of histogram bins
fewerbins	Decrease number of histogram bins

Examples

Adjust Properties of Histogram Object

This example creates a histogram object, and then shows how to adjust the properties of the histogram to affect the output display.

Create a histogram for all of the prime numbers less than 10,000,000. Specify an output argument to return the histogram object, `h`.

```
x = primes(1e7);
h = histogram(x)
```

```
h =
```

```
Histogram with properties:

           Data: [1×664579 double]
         Values: [1×100 double]
        NumBins: 100
       BinEdges: [1×101 double]
       BinWidth: 100000
      BinLimits: [0 10000000]
  Normalization: 'count'
      FaceColor: 'auto'
      EdgeColor: [0 0 0]

Show all properties
```

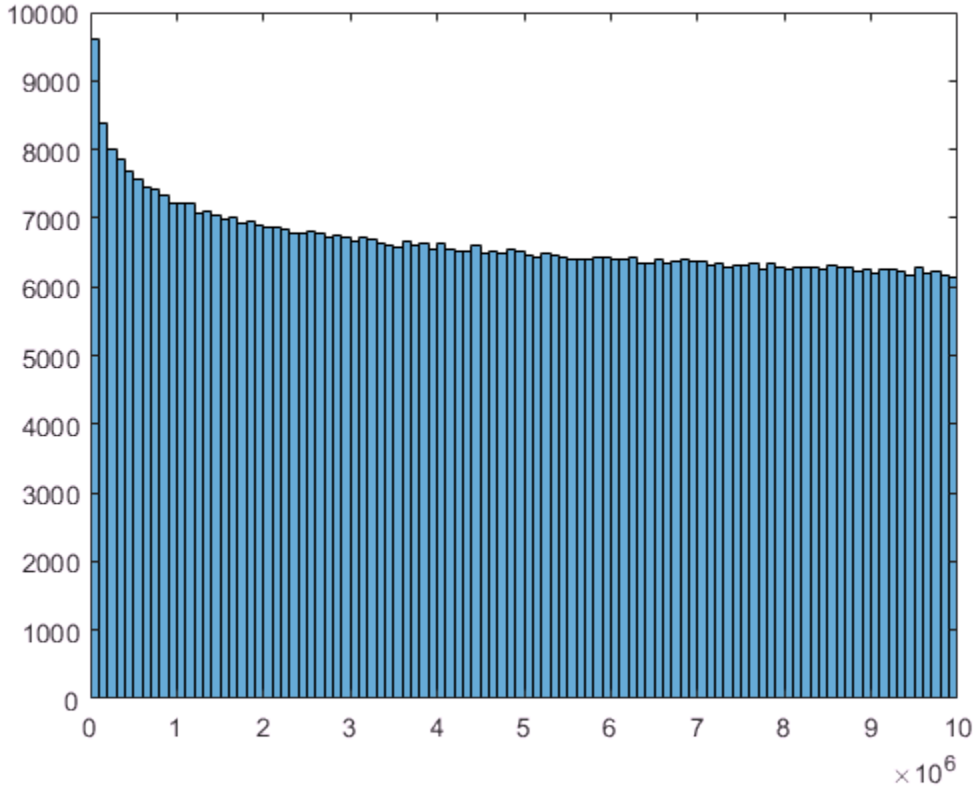

Change the normalization of the histogram by setting the `Normalization` property to `'probability'`.

```
h.Normalization = 'probability';
```

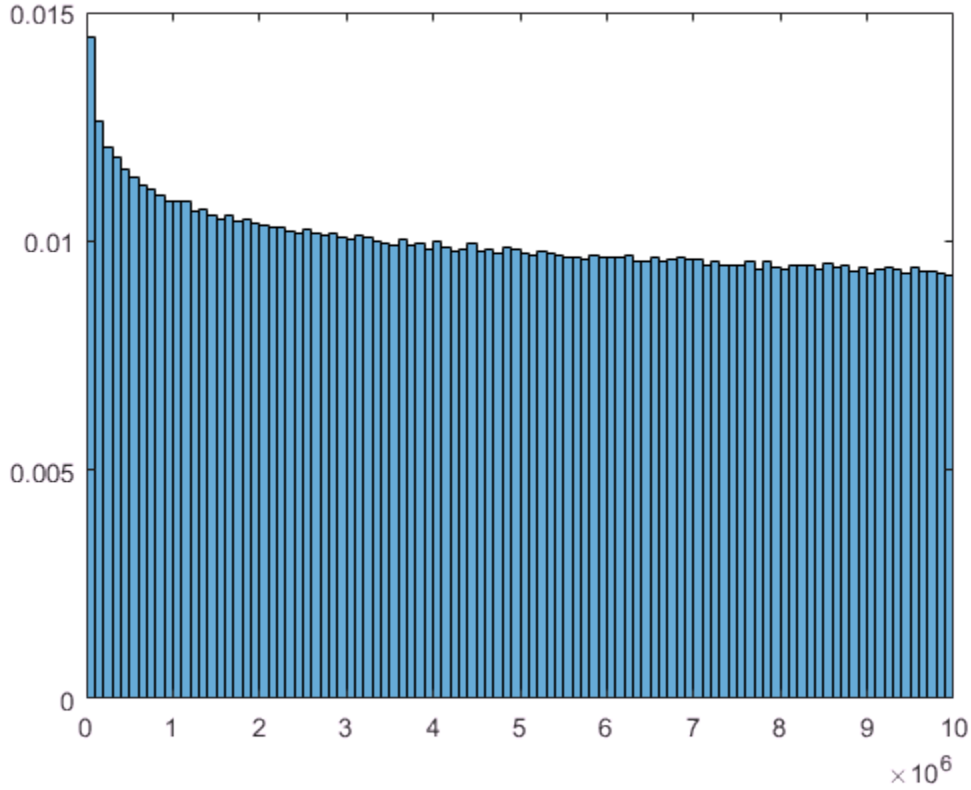

Use horizontal bars for the histogram.

```
h.Orientation = 'horizontal';
```

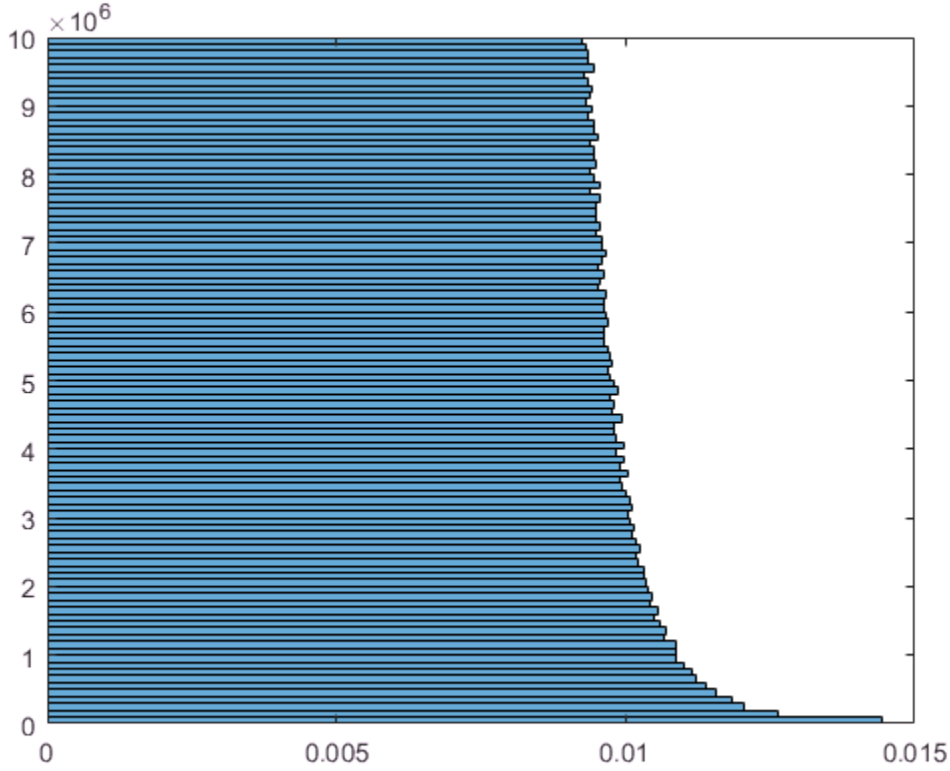

Zoom in to a specific range of bins. When you set `BinLimits`, the `BinLimitsMode` automatically changes to `'manual'`.

```
h.BinLimits = [1e6,2e6];
```

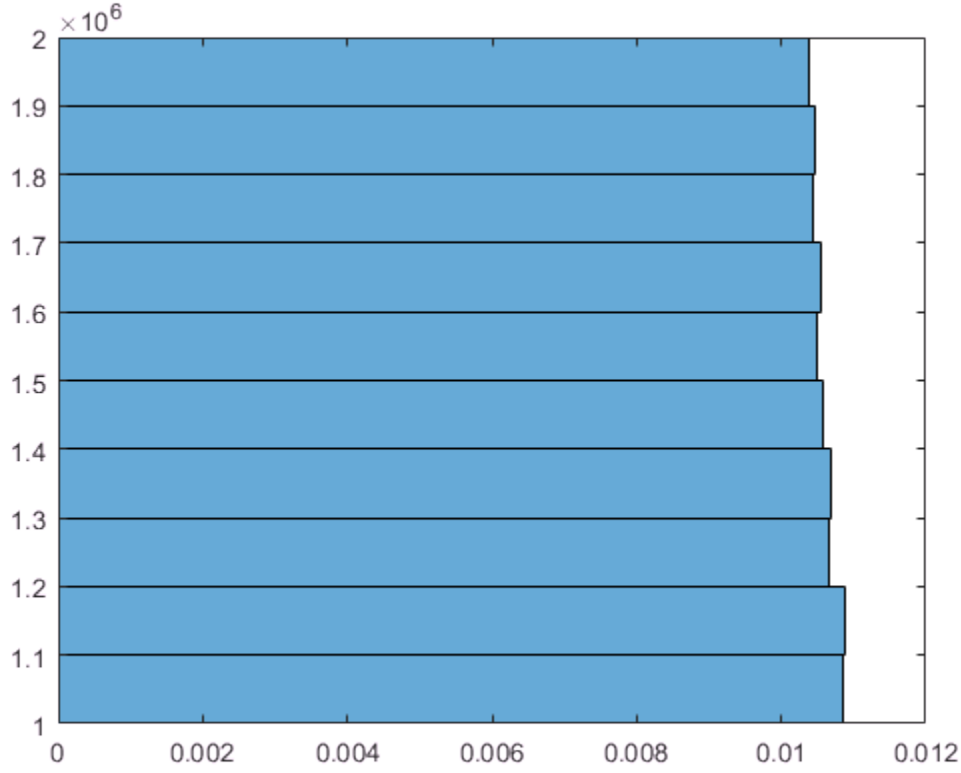

Zoom back out to the original bin scaling by switching `BinLimitsMode` back to `'auto'`.

```
h.BinLimitsMode = 'auto';
```

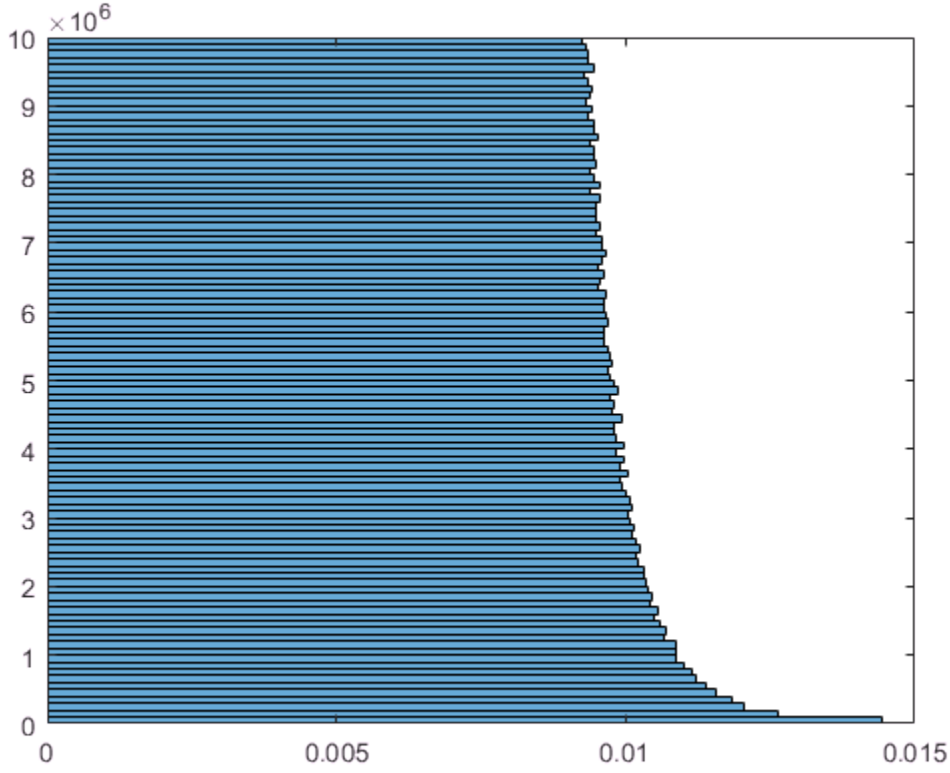

Change the number of bins in the histogram.

```
h.NumBins = 200;
```

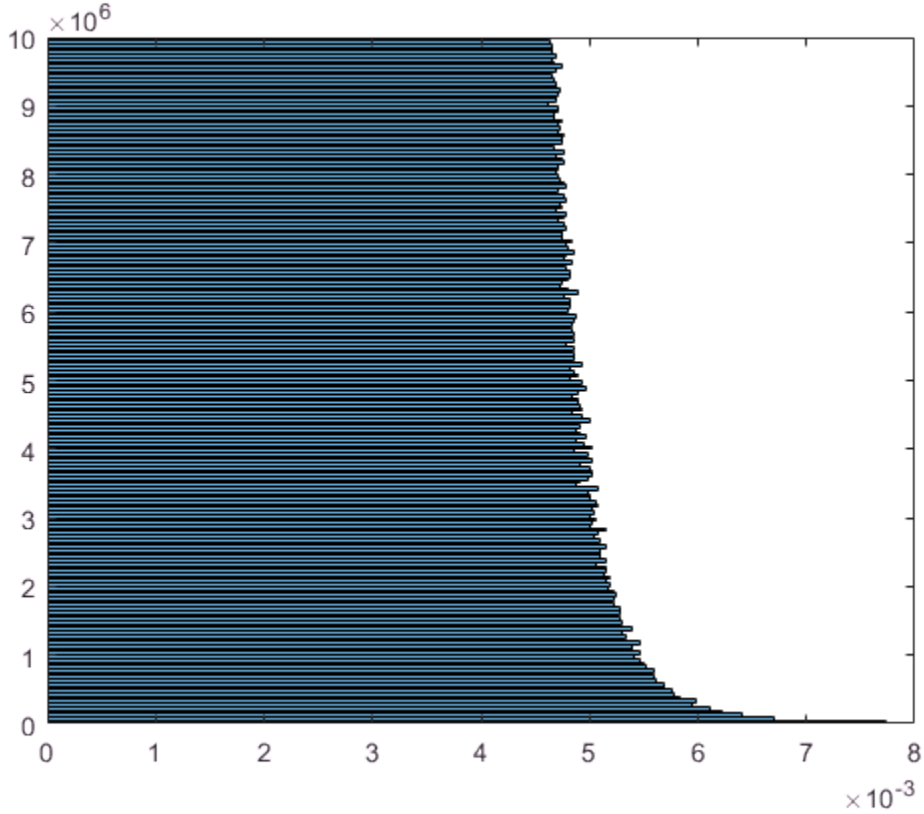

Create a vertical stair histogram.

```
h.Orientation = 'vertical';
h.DisplayStyle = 'stairs';
```

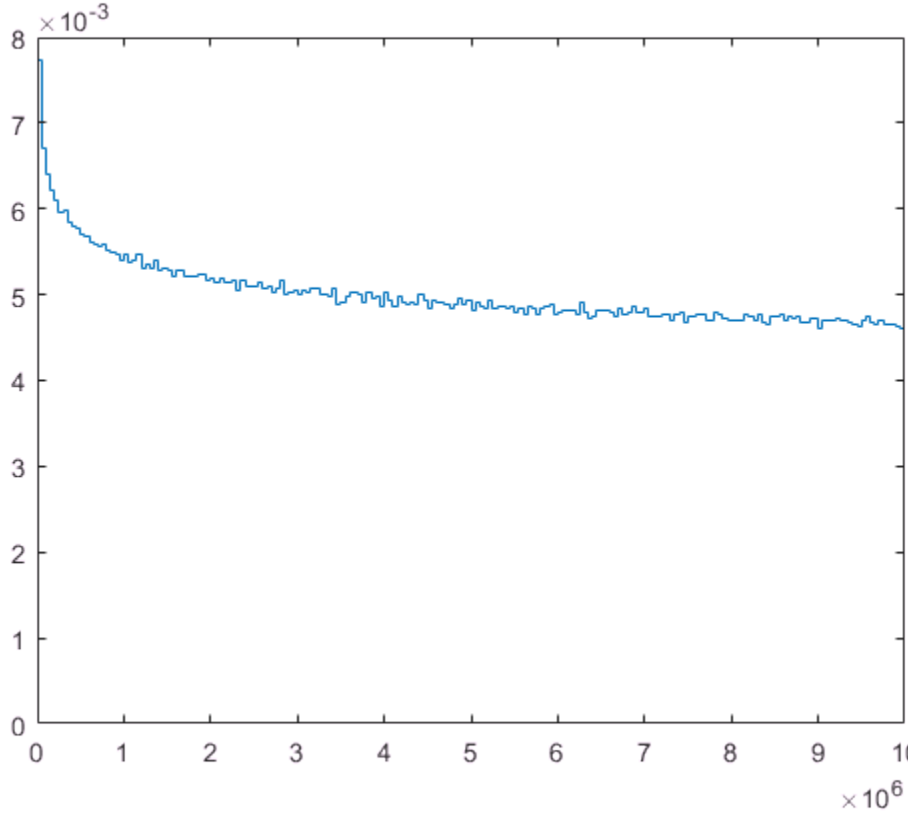

Saving and Loading Histogram Objects

Use the `savefig` function to save a histogram figure.

```
y = histogram(randn(10));
savefig('histogram.fig');
clear all
close all
```

Use `openfig` to load the histogram figure back into MATLAB. `openfig` also returns a handle to the figure, `h`.

```
h = openfig('histogram.fig');
```

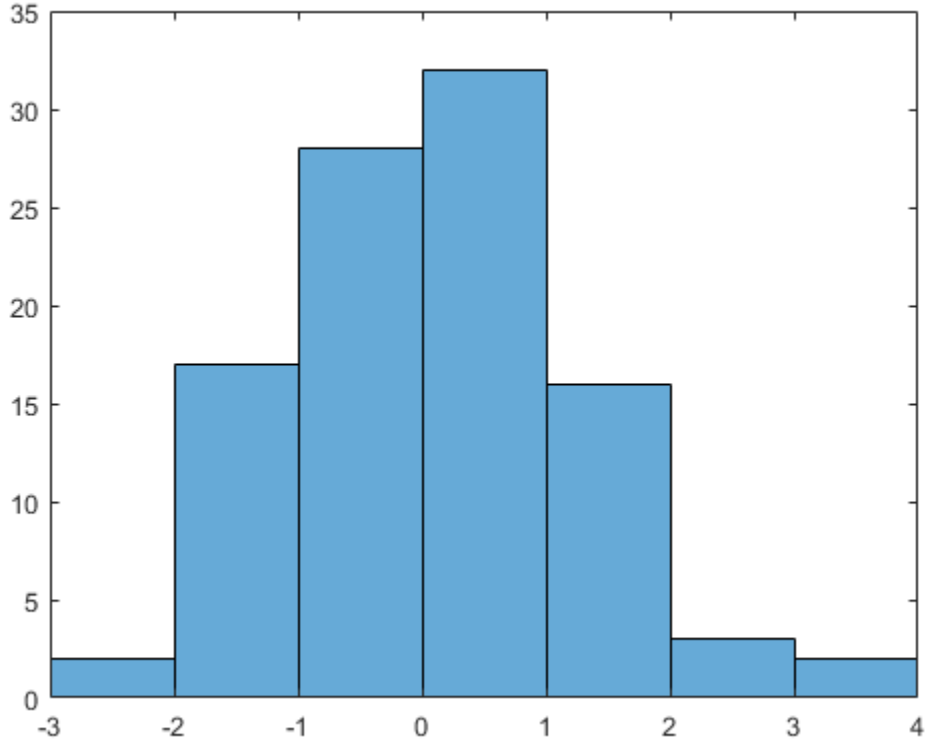

Use the `findobj` function to locate the correct object handle from the figure handle. This allows you to continue manipulating the original histogram object used to generate the figure.

```
y = findobj(h, 'type', 'histogram')
```

```
y =

  Histogram with properties:

             Data: [10×10 double]
           Values: [2 17 28 32 16 3 2]
          NumBins: 7
```

```
        BinEdges: [-3 -2 -1 0 1 2 3 4]
        BinWidth: 1
       BinLimits: [-3 4]
   Normalization: 'count'
       FaceColor: 'auto'
       EdgeColor: [0 0 0]

  Use GET to show all properties
```

See Also

See Also

histcounts | histogram

Topics

Histogram Properties

Introduced in R2014b

Histogram Properties

Control histogram appearance and behavior

Description

Histogram properties control the appearance and behavior of the histogram. By changing property values, you can modify aspects of the histogram. Use dot notation to refer to a particular object and property:

```
h = histogram(randn(10,1));
c = h.BinWidth;
h.BinWidth = 2;
```

Bins

`BarWidth` — Relative width of categorical bars
`0.9` (default) | scalar in range `[0,1]`

Note: This option only applies to histograms of categorical data.

Relative width of categorical bars, specified as a scalar value in the range `[0,1]`. Use this property to control the separation of categorical bars within the histogram. The default value is `0.9`, which means that the bar width is 90% of the space from the previous bar to the next bar, with 5% of that space on each side.

If you set this property to `1`, then adjacent bars touch.

Example: `0.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`BinCounts` — Bin counts
vector

Bin counts, specified as a vector. Use this input to pass bin counts to `histogram` when the bin counts calculation is performed separately and you do not want `histogram` to do any data binning.

The length of `counts` must be equal to the number of bins.

- For numeric histograms, the number of bins is `length(edges)-1`.
- For categorical histograms, the number of bins is equal to the number of categories.

Compared to the `Values` property, `BinCounts` is not normalized. If `Normalization` is `'count'`, then `Values` and `BinCounts` are equivalent.

Example: `histogram('BinEdges',-2:2,'BinCounts',[5 8 15 9])`

Example: `histogram('Categories',{'Yes','No','Maybe'},'BinCounts',[22 18 3])`

`BinCountsMode` — Selection mode for bin counts

`'auto'` (default) | `'manual'`

Selection mode for bin counts, specified as `'auto'` or `'manual'`. The default value is `'auto'`, so that the bin counts are automatically computed from `Data` and `BinEdges`.

If you specify `BinCounts`, then `BinCountsMode` is automatically set to `'manual'`. Similarly, if you specify `Data`, then `BinCountsMode` is automatically set to `'auto'`.

`BinEdges` — Edges of bins

numeric vector

Edges of bins, specified as a numeric vector. The first vector element specifies the left edge of the first bin. The last element specifies the right edge of the last bin. If you do not specify the bin edges, then `histogram` automatically determines the location of the bin edges.

This option does not apply to histograms of categorical data.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`BinLimits` — Bin limits

two-element vector

Bin limits, specified as a two-element vector, `[bmin,bmax]`. This option plots a histogram using the values in the input array, `X`, that fall between `bmin` and `bmax` inclusive. That is, `X(X>=bmin & X<=bmax)`.

This option does not apply to histograms of categorical data.

Example: `histogram(X,'BinLimits',[1,10])` plots a histogram using only the values in `X` that are between `1` and `10` inclusive.

`BinLimitsMode` — Selection mode for bin limits

`'auto'` (default) | `'manual'`

Selection mode for bin limits, specified as `'auto'` or `'manual'`. The default value is `'auto'`, so that the bin limits automatically adjust to the data.

If you explicitly specify either `BinLimits` or `BinEdges`, then `BinLimitsMode` is automatically set to `'manual'`. In that case, specify `BinLimitsMode` as `'auto'` to rescale the bin limits to the data.

This option does not apply to histograms of categorical data.

`BinMethod` — Binning algorithm

`'auto'` (default) | `'scott'` | `'fd'` | `'integers'` | `'sturges'` | `'sqrt'` | ...

Binning algorithm, specified as one of the values in this table.

Value	Description
`'auto'`	The default `'auto'` algorithm chooses a bin width to cover the data range and reveal the shape of the underlying distribution.
`'scott'`	Scott's rule is optimal if the data is close to being normally distributed. This rule is appropriate for most other distributions, as well. It uses a bin width of `3.5*std(X(:))*numel(X)^(-1/3)`.
`'fd'`	The Freedman-Diaconis rule is less sensitive to outliers in the data, and might be more suitable for data with heavy-tailed distributions. It uses a bin width of `2*IQR(X(:))*numel(X)^(-1/3)`, where `IQR` is the interquartile range of `X`.
`'integers'`	The integer rule is useful with integer data, as it creates a bin for each integer. It uses a bin width of 1 and places bin edges halfway

Value	Description
	between integers. To avoid accidentally creating too many bins, you can use this rule to create a limit of 65536 bins (2^{16}). If the data range is greater than 65536, then the integer rule uses wider bins instead. **Note:** `'integers'` does not support datetime or duration data.
`'sturges'`	Sturges' rule is popular due to its simplicity. It chooses the number of bins to be `ceil(1 + log2(numel(X)))`.
`'sqrt'`	The Square Root rule is widely used in other software packages. It chooses the number of bins to be `ceil(sqrt(numel(X)))`.

For datetime data, the bin method can be one of these units of time:

`'second'`	`'month'`
`'minute'`	`'quarter'`
`'hour'`	`'year'`
`'day'`	`'decade'`
`'week'`	`'century'`

For duration data, the bin method can be one of these units of time:

`'second'`	`'day'`
`'minute'`	`'year'`
`'hour'`	

This option does not apply to histograms of categorical data.

Note: If you set the `BinLimits`, `NumBins`, `BinEdges`, or `BinWidth` property, then the `BinMethod` property is set to `'manual'`.

Example: `histogram(X,'BinMethod','integers')` creates a histogram with the bins centered on integers.

`BinWidth` — Width of bins

scalar

Width of bins, specified as a scalar. When you specify `BinWidth`, then `histogram` can use a maximum of 65,536 bins (or 2^{16}). If instead the specified bin width requires more bins, then `histogram` uses a larger bin width corresponding to the maximum number of bins.

For datetime and duration data, the value of `'BinWidth'` can be a scalar duration or calendar duration.

This option does not apply to histograms of categorical data.

Example: `histogram(X,'BinWidth',5)` uses bins with a width of 5.

`Categories` — Categories included in histogram

cell array of character vectors | categorical vector

Note: This option only applies to categorical histograms.

Categories included in histogram, specified as a cell array of character vectors or categorical vector.

- If you specify an input categorical array `C`, then by default, `histogram` plots a bar for each category in `C`. In that case, use `Categories` to specify a unique subset of the categories instead.
- If you specify bin counts, then `Categories` specifies the associated category names for the histogram.

Example: `h = histogram(C,{'Large','Small'})` plots only the categorical data in the categories `'Large'` and `'Small'`.

Example: `histogram('Categories',{'Yes','No','Maybe'},'BinCounts',[22 18 3])` plots a histogram that has three categories with the associated bin counts.

Example: `h.Categories` queries the categories that are in histogram object `h`.

Data Types: `cell` | `categorical`

`DisplayOrder` — Category display order

`'data'` (default) | `'ascend'` | `'descend'`

Category display order, specified as `'ascend'`, `'descend'`, or `'data'`. With `'ascend'` or `'descend'`, the histogram displays with increasing or decreasing bar heights. The default `'data'` value uses the category order in the input data, `C`.

This option only works with categorical data.

`EdgeAlpha` — Transparency of histogram bar edges

`1` (default) | scalar value between `0` and `1` inclusive

Transparency of histogram bar edges, specified as a scalar value between `0` and `1` inclusive. A value of `1` means fully opaque and `0` means completely transparent (invisible).

Example: `histogram(X,'EdgeAlpha',0.5)` creates a histogram plot with semi-transparent bar edges.

`EdgeColor` — Histogram edge color

`[0 0 0]` or black (default) | `'none'` | `'auto'` | RGB triplet or color name

Histogram edge color, specified as one of these values:

- `'none'` — Edges are not drawn.
- `'auto'` — The color of each edge is chosen automatically.
- RGB triplet or a color name — Edges use the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`

Long Name	Short Name	RGB Triplet
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `histogram(X,'EdgeColor','r')` creates a histogram plot with red bar edges.

`FaceAlpha` — Transparency of histogram bars

`0.6` (default) | scalar value between `0` and `1` inclusive

Transparency of histogram bars, specified as a scalar value between `0` and `1` inclusive. `histogram` uses the same transparency for all the bars of the histogram. A value of `1` means fully opaque and `0` means completely transparent (invisible).

Example: `histogram(X,'FaceAlpha',1)` creates a histogram plot with fully opaque bars.

`FaceColor` — Histogram bar color

`'auto'` (default) | `'none'` | RGB triplet or color name

Histogram bar color, specified as one of these values:

- `'none'` — Bars are not filled.
- `'auto'` — The histogram bar color is chosen automatically (default).
- RGB triplet or a color name — Bars are filled with the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]

Long Name	Short Name	RGB Triplet
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

If you specify `DisplayStyle` as `'stairs'`, then `histogram` does not utilize the `FaceColor` property.

Example: `histogram(X,'FaceColor','g')` creates a histogram plot with green bars.

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Width of bar outlines

`0.5` (default) | positive value

Width of bar outlines, specified as a positive value in point units. One point equals 1/72 inch.

Example: `1.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Normalization` — Type of normalization

`'count'` (default) | `'probability'` | `'countdensity'` | `'pdf'` | `'cumcount'` | `'cdf'`

Type of normalization, specified as one of the values in this table. For each bin `i`:

- v_i is the bin value.
- c_i is the number of elements in the bin.
- w_i is the width of the bin.
- N is the number of elements in the input data. This value can be greater than the binned data if the data contains `NaN`, `NaT`, or `<undefined>` values, or if some of the data lies outside the bin limits.

Value	Bin Values	Notes
`'count'` (default)	$v_i = c_i$	• Count or frequency of observations. • Sum of bin values is less than or equal to `numel(X)`. The sum is less than `numel(X)` only when some of the input data is not included in the bins. • For categorical data, sum of bin values is less than or equal to either `numel(X)` or `sum(ismember(X(:),Categories))`
`'countdensity'`	$v_i = \frac{c_i}{w_i}$	• Count or frequency scaled by width of bin. • The area (height * width) of each bar is the number of observations in the bin. The sum of the bar areas is less than or equal to `numel(X)`. • For categorical histograms, this is the same as `'count'`.

Value	Bin Values	Notes
		Note: `'countdensity'` does not support datetime or duration data.
`'cumcount'`	$v_i = \sum_{j=1}^{i} c_j$	• Cumulative count. Each bin value is the cumulative number of observations in that bin and all previous bins. • The height of the last bar is less than or equal to `numel(X)`. • For categorical histograms, the height of the last bar is less than or equal to `numel(X)` or `sum(ismember(X(:),Categories))`
`'probability'`	$v_i = \frac{c_i}{N}$	• Relative probability. • The sum of the bar heights is less than or equal to `1`.
`'pdf'`	$v_i = \frac{c_i}{N \cdot w_i}$	• Probability density function estimate. • The area of each bar is the relative number of observations. The sum of the bar areas is less than or equal to `1`. • For categorical histograms, this is the same as `'probability'`. **Note:** `'pdf'` does not support datetime or duration data.

Value	Bin Values	Notes
`'cdf'`	$v_i = \sum_{j=1}^{i} \frac{c_j}{N}$	• Cumulative density function estimate. • The height of each bar is equal to the cumulative relative number of observations in the bin and all previous bins. The height of the last bar is less than or equal to 1. • For categorical data, the height of each bar is equal to the cumulative relative number of observations in each category and all previous categories.

Example: `histogram(X,'Normalization','pdf')` plots an estimate of the probability density function for `X`.

`NumBins` — Number of bins
positive integer

Number of bins, specified as a positive integer. If you do not specify `NumBins`, then `histogram` automatically calculates how many bins to use based on the values in `Data`.

This option does not apply to histograms of categorical data.

`NumDisplayBins` — Number of categories to display
scalar

Number of categories to display, specified as a scalar. You can change the ordering of categories displayed in the histogram using the `'DisplayOrder'` option.

This option only works with categorical data.

`ShowOthers` — Toggle summary display of data belonging to undisplayed categories
`'off'` (default) | `'on'`

Toggle summary display of data belonging to undisplayed categories, specified as `'off'` or `'on'`. Set this option to `'on'` to display an additional bar in the histogram with the name `'Others'`. This extra bar counts all elements that do not belong to categories displayed in the histogram.

You can change the number of categories displayed in the histogram, as well as their order, using the `'NumDisplayBins'` and `'DisplayOrder'` options.

This option only works with categorical data.

Data

`Data` — Data to distribute among bins

vector | matrix | multidimensional array | categorical array

Data to distribute among bins, specified as a vector, matrix, multidimensional array, or categorical array. If `Data` is not a vector, then `histogram` treats it as a single column vector, `Data(:)`, and plots a single histogram.

`histogram` ignores all `NaN` and undefined categorical values. Similarly, `histogram` ignores `Inf` and `-Inf` values unless the bin edges explicitly specify `Inf` or `-Inf` as a bin edge.

If you change the values in the `Data` property of a `histogram` object, then the bin edges are not automatically updated. To recompute the bins, adjust a bin-related property such as `BinMethod` or `NumBins`. You can only specify categorical values for `Data` if the histogram object was originally created using categoricals.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `categorical`

`Values` — Bin values

numeric vector

This property is read-only.

Bin values, returned as a numeric vector. If `Normalization` is `'count'` (the default), then the `k`th element in `Values` specifies how many elements of `Data` fall in the kth bin interval (bin counts). The last bin includes values that are on *either* bin edge, but all other bins only include values that fall on the left edge.

Depending on the value of `Normalization`, the `Values` property can instead contain a normalized variant of the bin counts.

Histogram Type

`DisplayStyle` — Histogram display style

`'bar'` (default) | `'stairs'`

Histogram display style, specified as either `'bar'` or `'stairs'`. Specify `'stairs'` to display a stairstep plot, which displays the outline of the histogram without filling the interior.

The default value of `'bar'` displays a histogram bar plot.

Example: `histogram(X,'DisplayStyle','stairs')` plots the outline of the histogram.

`Orientation` — Orientation of bars

`'vertical'` (default) | `'horizontal'`

Orientation of bars, specified as `'vertical'` or `'horizontal'`.

Example: `histogram(X,'Orientation','horizontal')` creates a histogram plot with horizontal bars.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

Identifiers

`Type` — Type of graphics object

`'histogram'` | `'categoricalhistogram'`

This property is read-only.

Type of graphics object, returned as either `'histogram'` or `'categoricalhistogram'`. Use this property to find all objects of a given type within a plotting hierarchy, such as searching for the type using `findobj`.

`Tag` — Tag to associate with histogram

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

Data Types: `char`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used by legend

variable name of `Data` or `''` (default) | character vector

Text used by the legend, specified as a character vector. The text appears next to an icon of the histogram.

Example: `'Text Description'`

For multiline text, create the character vector using `sprintf` with the new line character `\n`.

Example: `sprintf('line one\nline two')`

Alternatively, you can specify the legend text using the `legend` function.

- If you specify the text as an input argument to the `legend` function, then the legend uses the specified text and sets the `DisplayName` property to the same value.

- If you do not specify the text as an input argument to the `legend` function, then the legend uses the text in the `DisplayName` property. The default value of `DisplayName` is one of these values.
  - For numeric inputs, `DisplayName` is a character vector representing the variable name of the input data used to construct the histogram. If the input data does not have a variable name, then `DisplayName` is empty, `''`.
  - For categorical array inputs, `DisplayName` is empty, `''`.

If the `DisplayName` property does not contain any text, then the legend generates a character vector. The character vector has the form `'dataN'`, where `N` is the number assigned to the histogram object based on its location in the list of legend entries.

If you edit interactively the character vector in an existing legend, then MATLAB updates the `DisplayName` property to the edited character vector.

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
```

```
legend(p)
```

Parent/Child

`Parent` — Parent of histogram

axes object | polar axes object | group object | transform object

Parent of histogram, specified as an axes, polar axes, group, or transform object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the `Histogram` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Histogram` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Histogram` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Histogram` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Histogram` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Histogram` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback. Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Histogram` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Histogram` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`histogram`

Topics
"Access Property Values"
histogram

histogram2

Bivariate histogram plot

Syntax

```
histogram2(X,Y)
histogram2(X,Y,nbins)
histogram2(X,Y,Xedges,Yedges)
histogram2('XBinEdges',Xedges,'YBinEdges',Yedges,'BinCounts',counts)

histogram2(___,Name,Value)
histogram2(ax,___)
h = histogram2(___)
```

Description

`histogram2(X,Y)` creates a bivariate histogram plot of `X` and `Y`. The `histogram2` function uses an automatic binning algorithm that returns bins with a uniform area, chosen to cover the range of elements in `X` and `Y` and reveal the underlying shape of the distribution. `histogram2` displays the bins as 3-D rectangular bars such that the height of each bar indicates the number of elements in the bin.

`histogram2(X,Y,nbins)` specifies the number of bins to use in each dimension of the histogram.

`histogram2(X,Y,Xedges,Yedges)` specifies the edges of the bins in each dimension using the vectors `Xedges` and `Yedges`.

`histogram2('XBinEdges',Xedges,'YBinEdges',Yedges,'BinCounts',counts)` manually specifies the bin counts. `histogram2` plots the specified bin counts and does not do any data binning.

`histogram2(___,Name,Value)` specifies additional options with one or more `Name,Value` pair arguments using any of the previous syntaxes. For example, you can specify `'BinWidth'` and a two-element vector to adjust the width of the bins in

each dimension, or `'Normalization'` with a valid option (`'count'`, `'probability'`, `'countdensity'`, `'pdf'`, `'cumcount'`, or `'cdf'`) to use a different type of normalization. For a list of properties, see Histogram2 Properties.

`histogram2(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = histogram2( ___ )` returns a `Histogram2` object. Use this to inspect and adjust properties of the bivariate histogram. For a list of properties, see Histogram2 Properties.

Examples

Histogram of Vectors

Generate 10,000 pairs of random numbers and create a bivariate histogram. The `histogram2` function automatically chooses an appropriate number of bins to cover the range of values in `x` and `y` and show the shape of the underlying distribution.

```
x = randn(10000,1);
y = randn(10000,1);
h = histogram2(x,y)
```

```
h = 
  Histogram2 with properties:

             Data: [10000×2 double]
           Values: [25×28 double]
          NumBins: [25 28]
        XBinEdges: [-3.9000 -3.6000 -3.3000 -3 -2.7000 -2.4000 -2.1000 -1.8000 -1.5000
        YBinEdges: [-4.2000 -3.9000 -3.6000 -3.3000 -3.0000 -2.7000 -2.4000 -2.1000 -1
         BinWidth: [0.3000 0.3000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0.1500 0.1500 0.1500]

  Show all properties
```

```
xlabel('x')
ylabel('y')
```

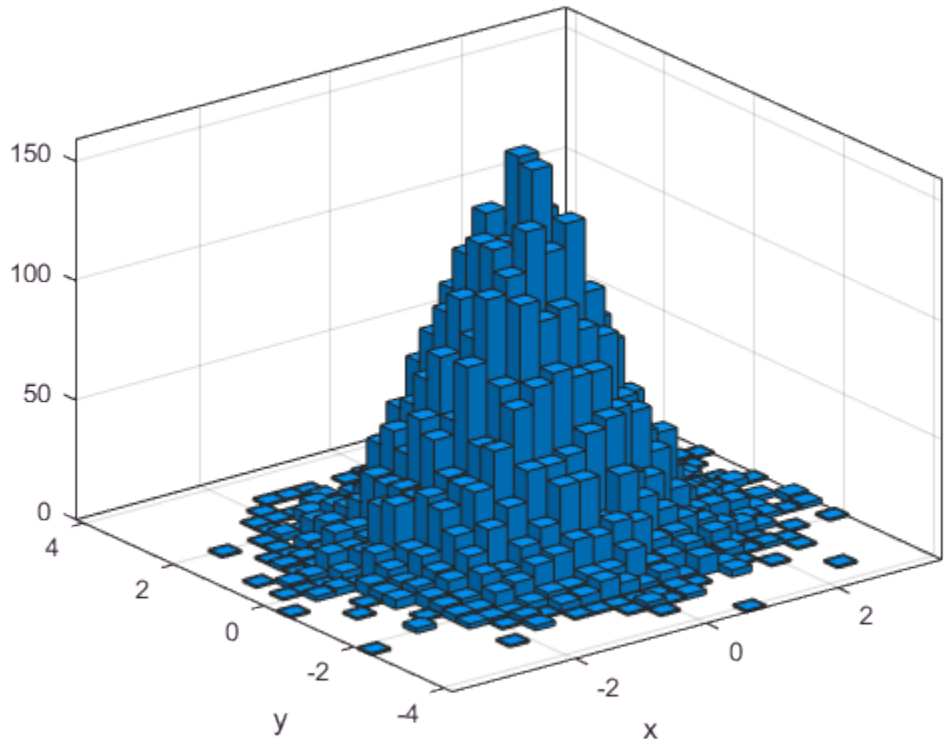

When you specify an output argument to the `histogram2` function, it returns a histogram2 object. You can use this object to inspect the properties of the histogram, such as the number of bins or the width of the bins.

Find the number of histogram bins in each dimension.

```
nXnY = h.NumBins
```

```
nXnY =

    25    28
```

Specify Number of Histogram Bins

Plot a bivariate histogram of 1,000 pairs of random numbers sorted into 25 equally spaced bins, using 5 bins in each dimension.

```
x = randn(1000,1);
y = randn(1000,1);
nbins = 5;
h = histogram2(x,y,nbins)
```

```
h = 
  Histogram2 with properties:

             Data: [1000×2 double]
           Values: [5×5 double]
          NumBins: [5 5]
        XBinEdges: [-4 -2.4000 -0.8000 0.8000 2.4000 4]
        YBinEdges: [-4 -2.4000 -0.8000 0.8000 2.4000 4]
         BinWidth: [1.6000 1.6000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0.1500 0.1500 0.1500]

  Show all properties
```

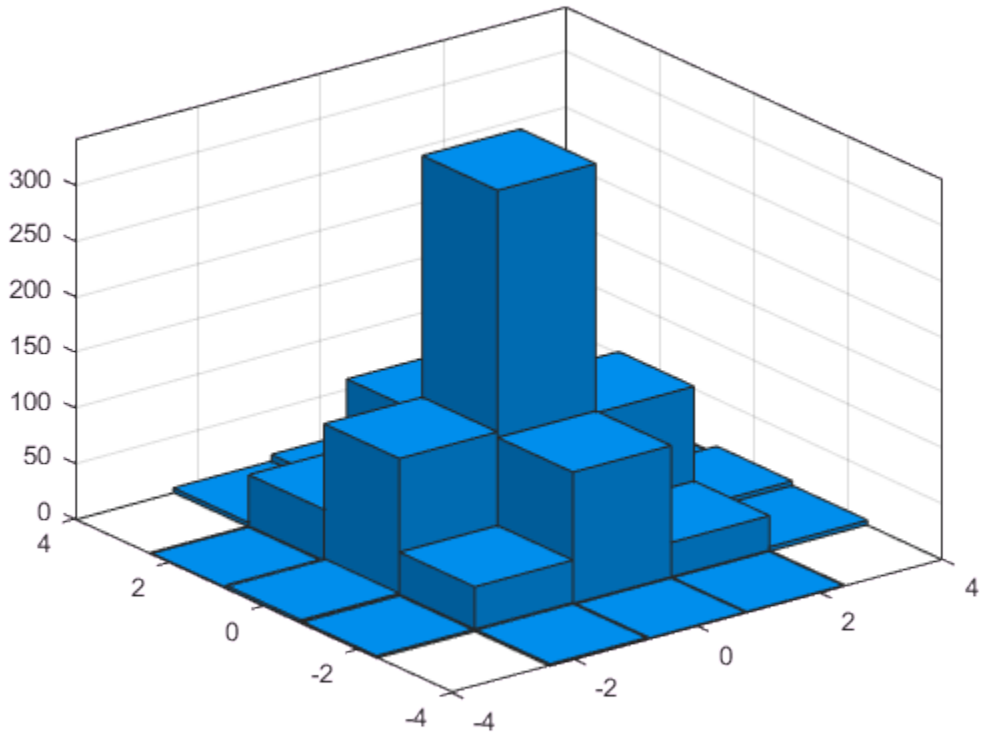

Find the resulting bin counts.

```
counts = h.Values
```

```
counts =

     0     2     3     1     0
     2    40   124    47     4
     1   119   341   109    10
     1    32   117    33     1
     0     4     8     1     0
```

Adjust Number of Histogram Bins

Generate 1,000 pairs of random numbers and create a bivariate histogram.

```
x = randn(1000,1);
y = randn(1000,1);
h = histogram2(x,y)
```

```
h =
  Histogram2 with properties:

             Data: [1000×2 double]
           Values: [15×15 double]
          NumBins: [15 15]
        XBinEdges: [-3.5000 -3 -2.5000 -2 -1.5000 -1 -0.5000 0 0.5000 1 1.5000 2 2.5000
        YBinEdges: [-3.5000 -3 -2.5000 -2 -1.5000 -1 -0.5000 0 0.5000 1 1.5000 2 2.5000
         BinWidth: [0.5000 0.5000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0.1500 0.1500 0.1500]

  Show all properties
```

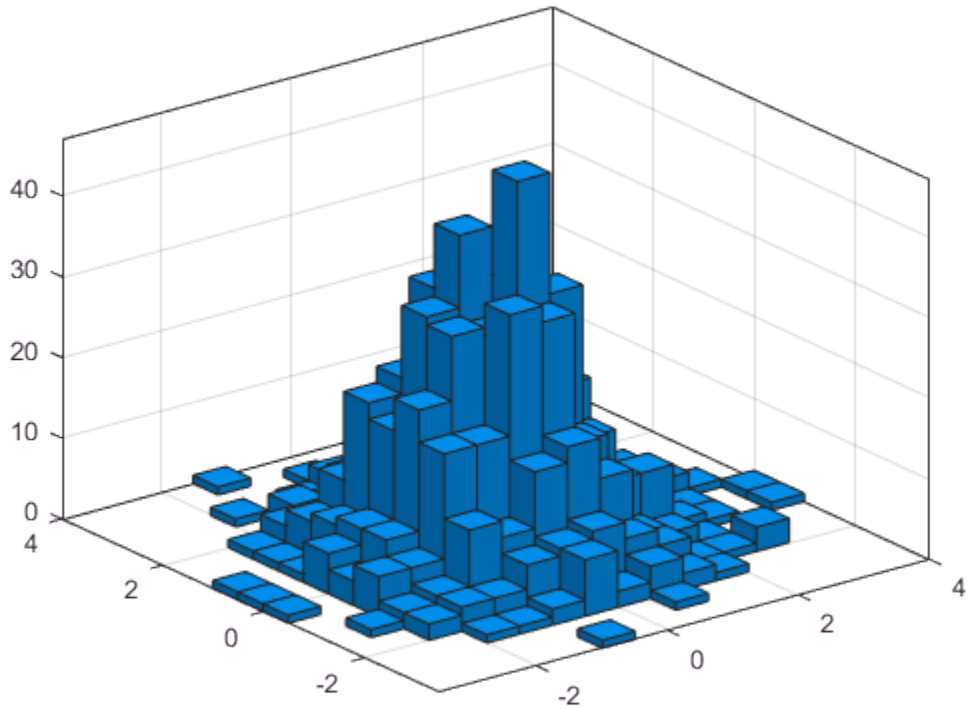

Use the `morebins` function to coarsely adjust the number of bins in the *x* dimension.

```
nbins = morebins(h,'x');
nbins = morebins(h,'x')
```

```
nbins =

    19    15
```

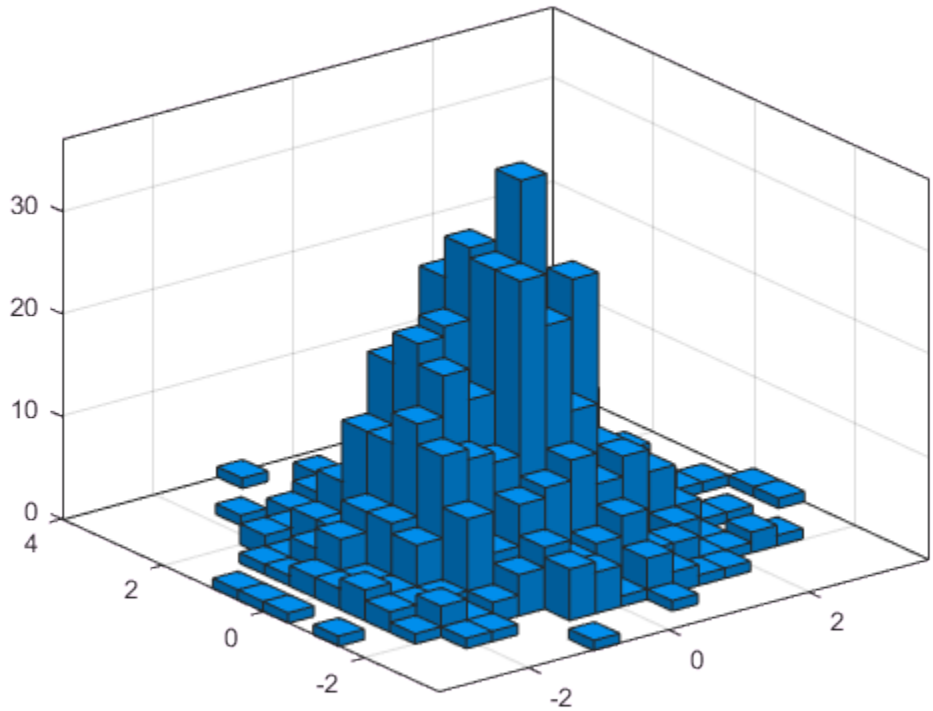

Use the `fewerbins` function to adjust the number of bins in the y dimension.

```
nbins = fewerbins(h,'y');
nbins = fewerbins(h,'y')
```

```
nbins =

    19    11
```

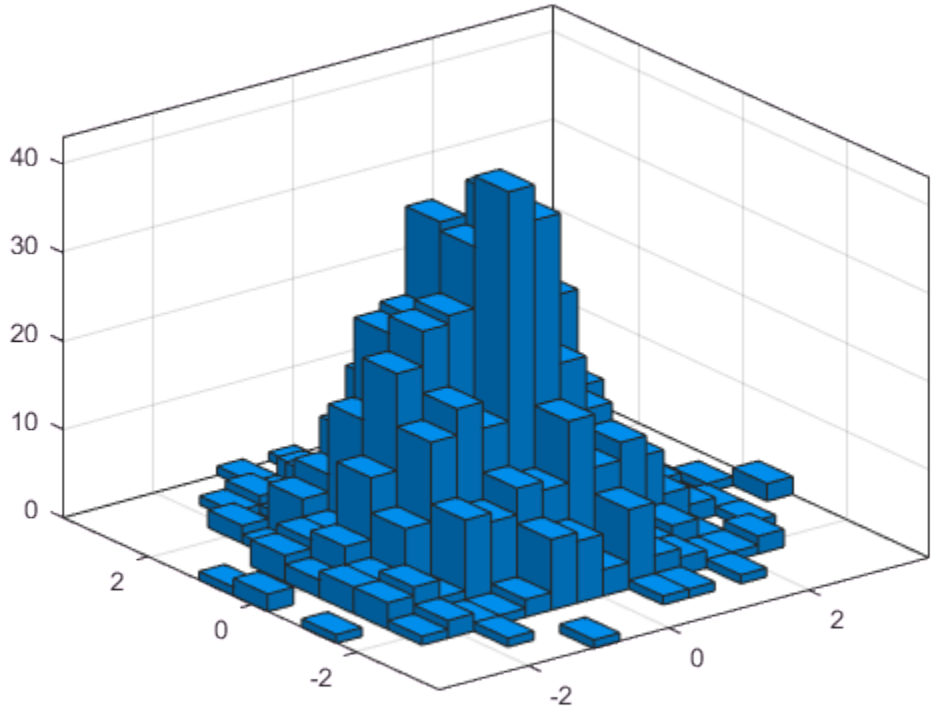

Adjust the number of bins at a fine grain level by explicitly setting the number of bins.

```
h.NumBins = [20 10];
```

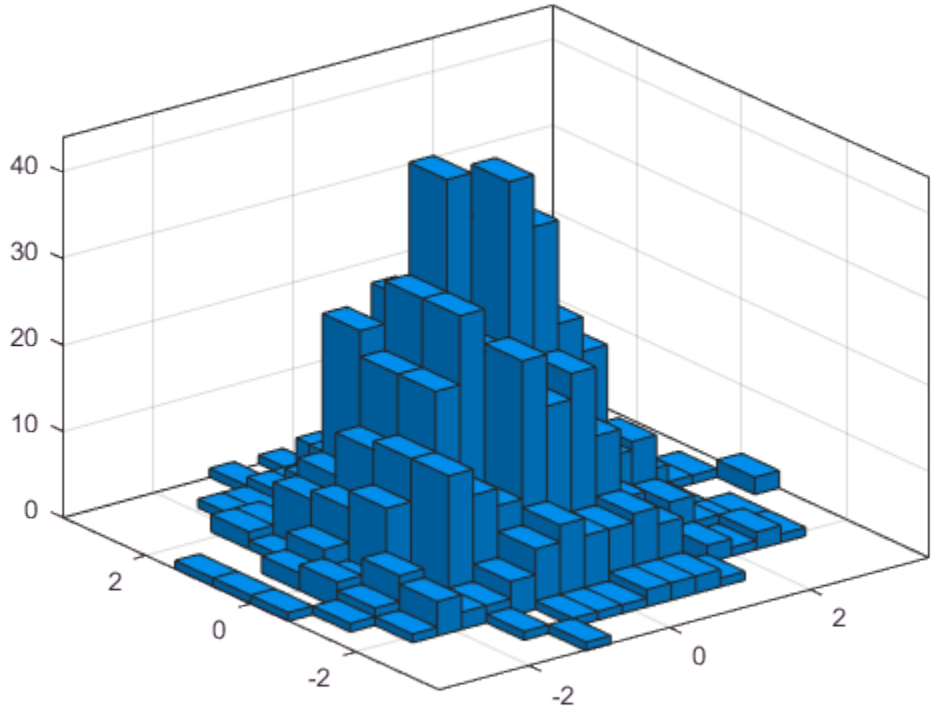

Color Histogram Bars by Height

Create a bivariate histogram using 1,000 normally distributed random numbers with 12 bins in each dimension. Specify `FaceColor` as `'flat'` to color the histogram bars by height.

```
h = histogram2(randn(1000,1),randn(1000,1),[12 12],'FaceColor','flat');
colorbar
```

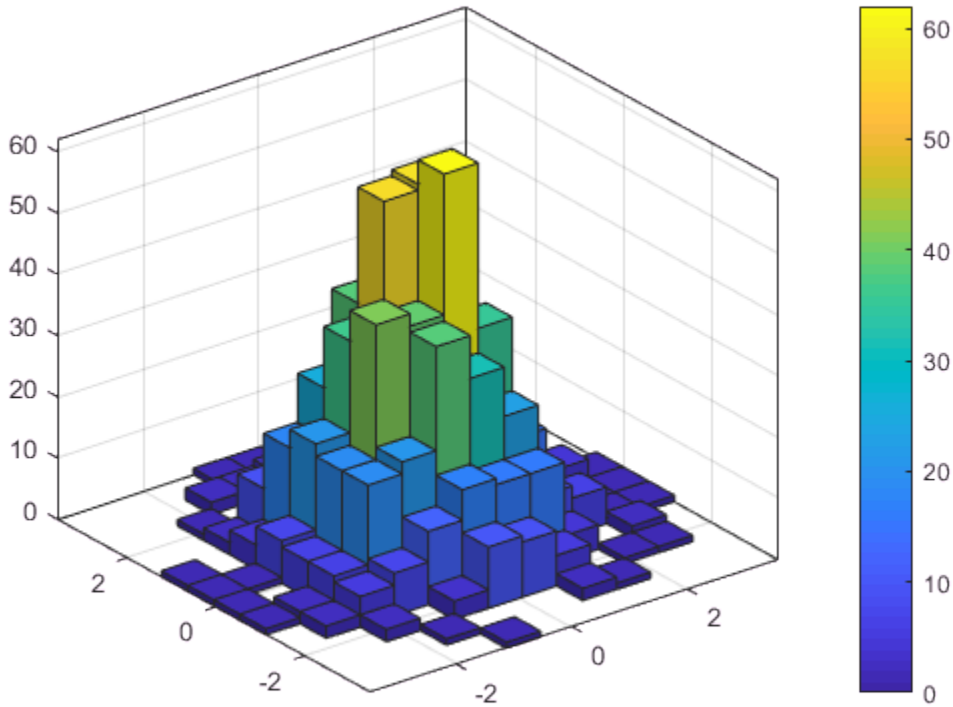

Tiled Histogram View

Generate random data and plot a bivariate tiled histogram. Display the empty bins by specifying `ShowEmptyBins` as `'on'`.

```
x = 2*randn(1000,1)+2;
y = 5*randn(1000,1)+3;
h = histogram2(x,y,'DisplayStyle','tile','ShowEmptyBins','on');
```

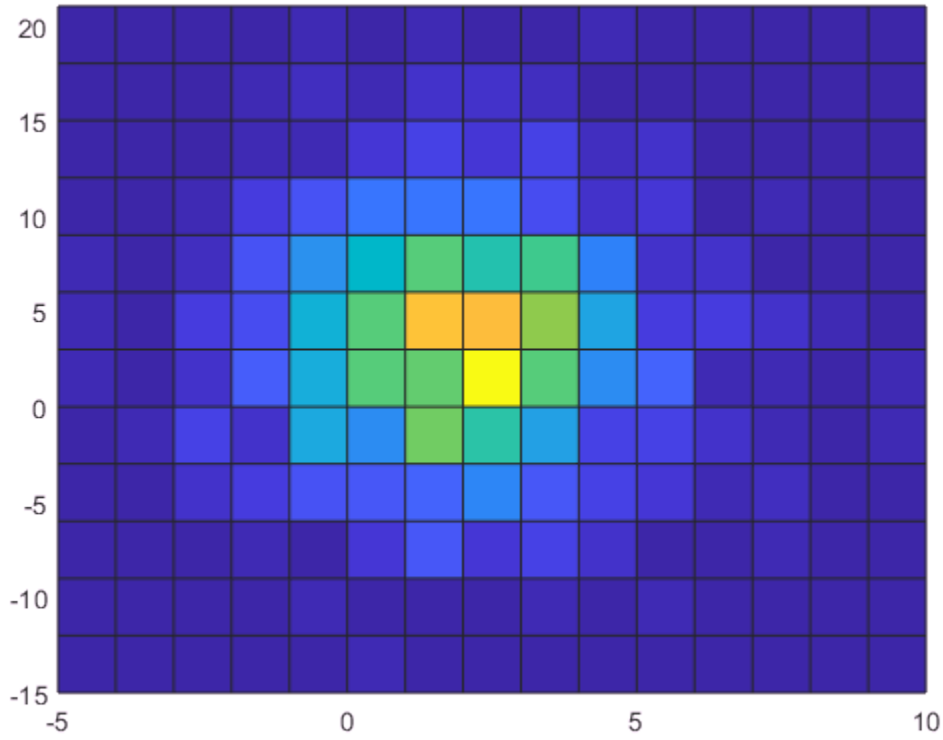

Specify Bin Edges of Histogram

Generate 1,000 pairs of random numbers and create a bivariate histogram. Specify the bin edges using two vectors, with infinitely wide bins on the boundary of the histogram to capture all outliers that do not satisfy $|x| < 2$.

```
x = randn(1000,1);
y = randn(1000,1);
Xedges = [-Inf -2:0.4:2 Inf];
Yedges = [-Inf -2:0.4:2 Inf];
h = histogram2(x,y,Xedges,Yedges)
```

```
h =
```

```
Histogram2 with properties:

           Data: [1000×2 double]
         Values: [12×12 double]
        NumBins: [12 12]
      XBinEdges: [-Inf -2 -1.6000 -1.2000 -0.8000 -0.4000 0 0.4000 0.8000 1.2000 1.6
      YBinEdges: [-Inf -2 -1.6000 -1.2000 -0.8000 -0.4000 0 0.4000 0.8000 1.2000 1.6
       BinWidth: 'nonuniform'
  Normalization: 'count'
      FaceColor: 'auto'
      EdgeColor: [0.1500 0.1500 0.1500]

Show all properties
```

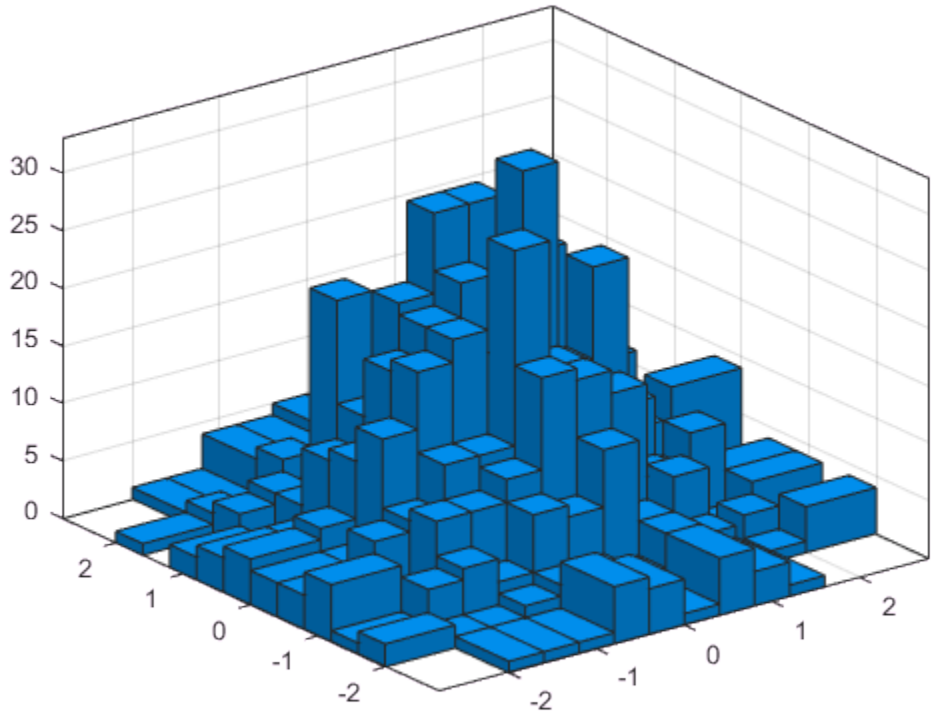

When the bin edges are infinite, `histogram2` displays each outlier bin (along the boundary of the histogram) as being double the width of the bin next to it.

Specify the `Normalization` property as `'countdensity'` to remove the bins containing the outliers. Now the *volume* of each bin represents the frequency of observations in that interval.

```
h.Normalization = 'countdensity';
```

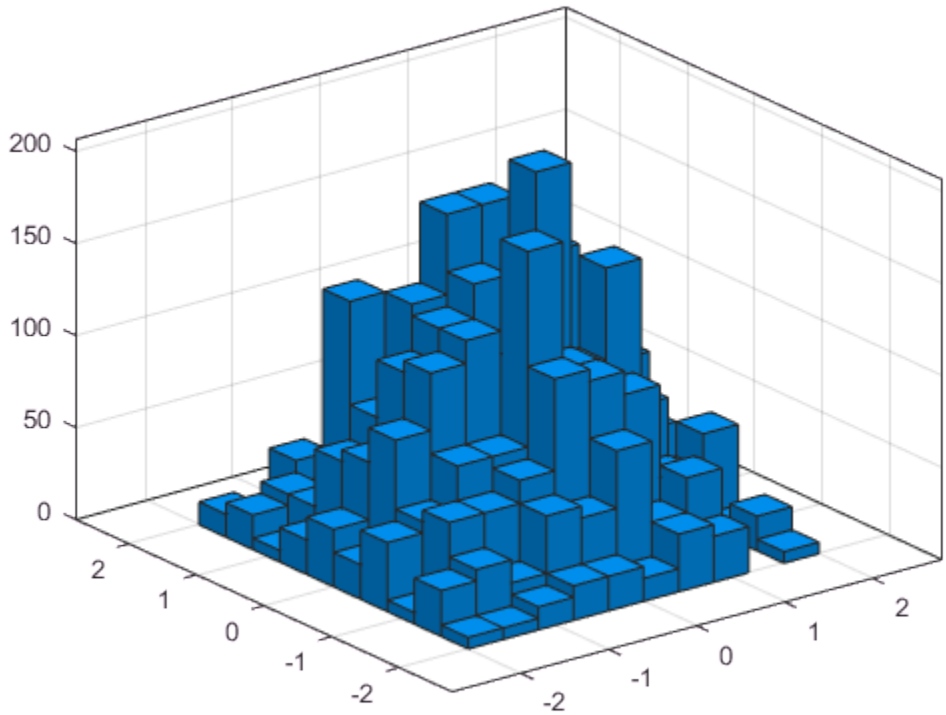

Normalized Histogram

Generate 1,000 pairs of random numbers and create a bivariate histogram using the `'probability'` normalization.

```
x = randn(1000,1);
y = randn(1000,1);
h = histogram2(x,y,'Normalization','probability')
```

```
h =
  Histogram2 with properties:

             Data: [1000×2 double]
           Values: [15×15 double]
          NumBins: [15 15]
        XBinEdges: [-3.5000 -3 -2.5000 -2 -1.5000 -1 -0.5000 0 0.5000 1 1.5000 2 2.5000
        YBinEdges: [-3.5000 -3 -2.5000 -2 -1.5000 -1 -0.5000 0 0.5000 1 1.5000 2 2.5000
         BinWidth: [0.5000 0.5000]
    Normalization: 'probability'
        FaceColor: 'auto'
        EdgeColor: [0.1500 0.1500 0.1500]

  Show all properties
```

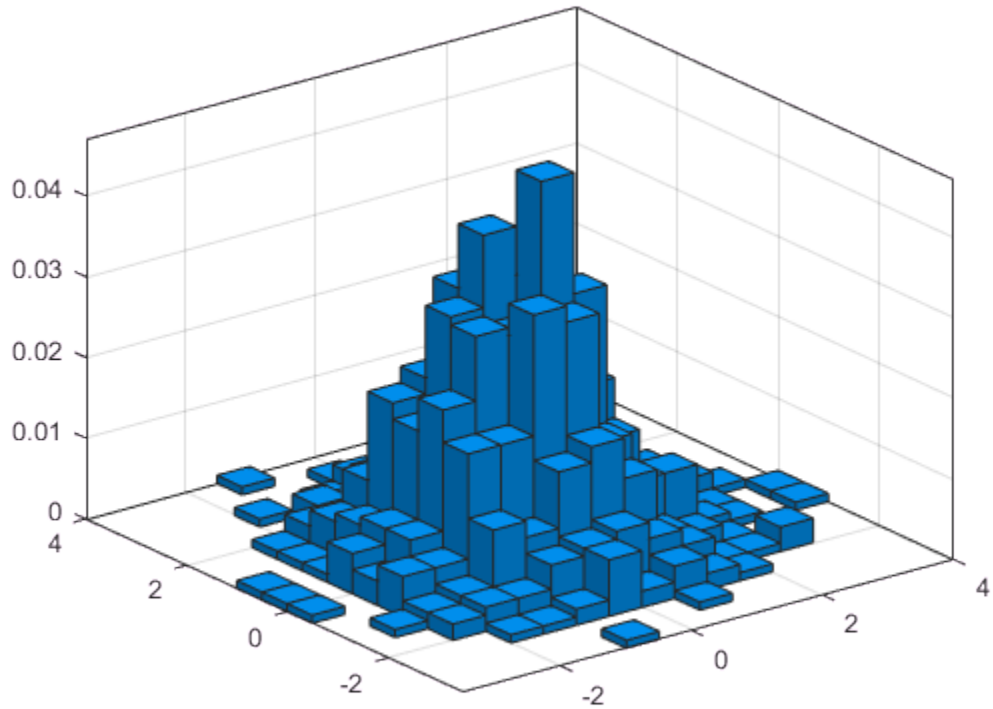

Compute the total sum of the bar heights. With this normalization, the height of each bar is equal to the probability of selecting an observation within that bin interval, and the heights of all of the bars sum to 1.

```
S = sum(h.Values(:))
```

```
S = 1.0000
```

Adjust Histogram Properties

Generate 1,000 pairs of random numbers and create a bivariate histogram. Return the histogram object to adjust the properties of the histogram without recreating the entire plot.

```
x = randn(1000,1);
y = randn(1000,1);
h = histogram2(x,y)

h =
  Histogram2 with properties:

             Data: [1000×2 double]
           Values: [15×15 double]
          NumBins: [15 15]
        XBinEdges: [-3.5000 -3 -2.5000 -2 -1.5000 -1 -0.5000 0 0.5000 1 1.5000 2 2.5000
        YBinEdges: [-3.5000 -3 -2.5000 -2 -1.5000 -1 -0.5000 0 0.5000 1 1.5000 2 2.5000
         BinWidth: [0.5000 0.5000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0.1500 0.1500 0.1500]

  Show all properties
```

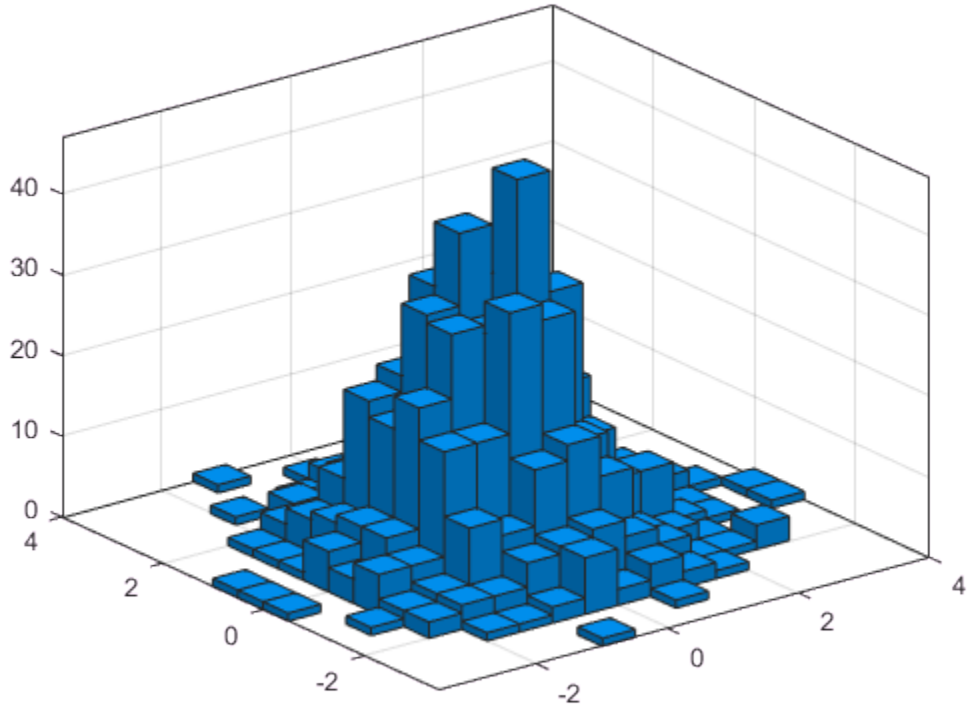

Color the histogram bars by height.

```
h.FaceColor = 'flat';
```

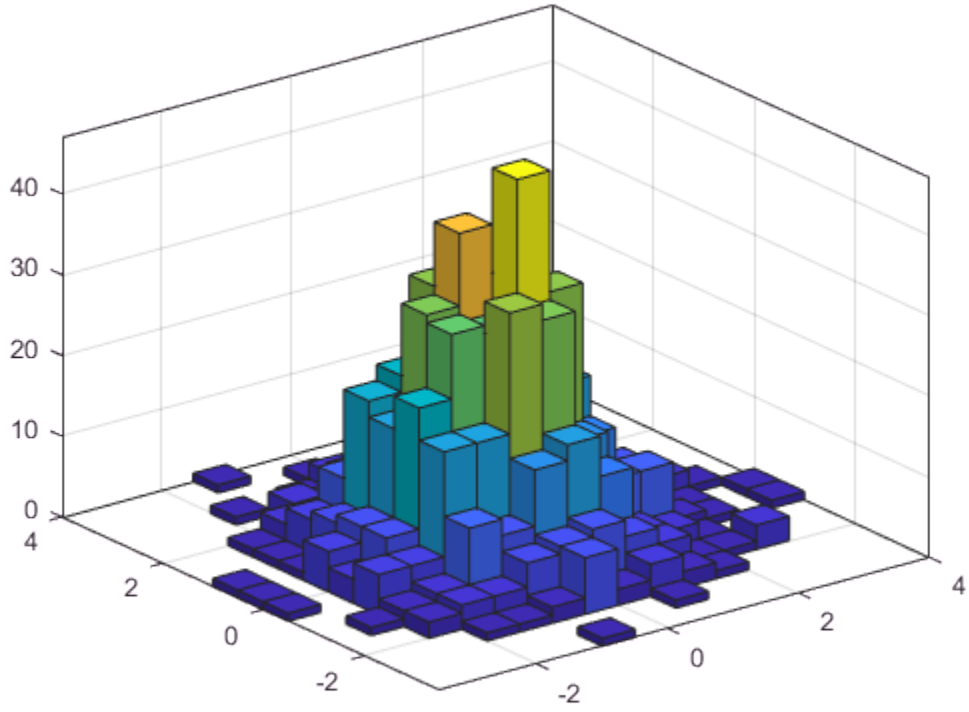

Change the number of bins in each direction.

```
h.NumBins = [10 25];
```

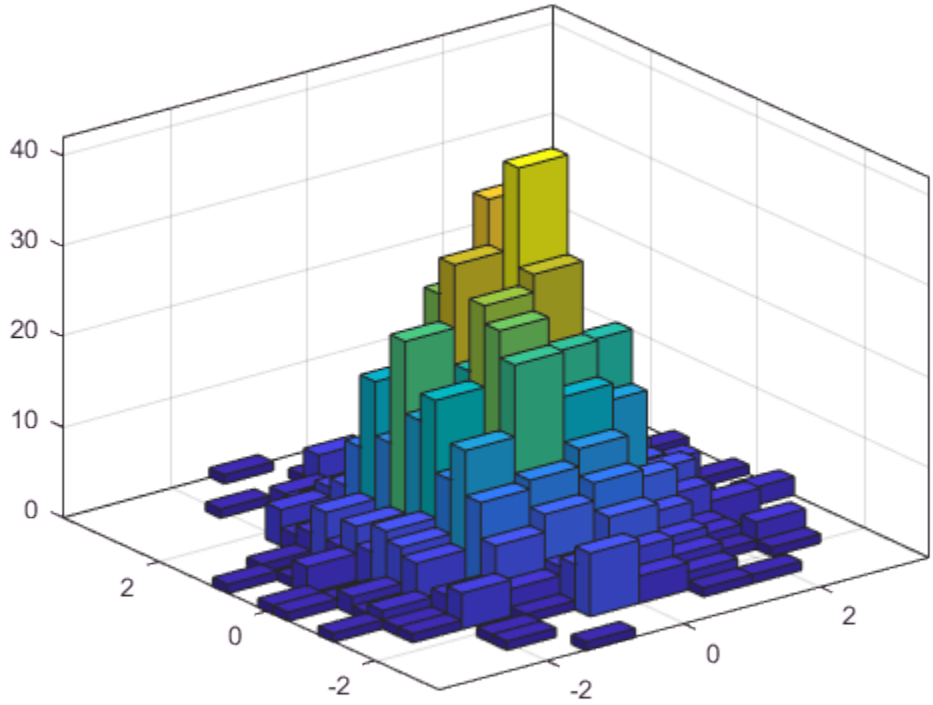

Display the histogram as a tile plot.

```
h.DisplayStyle = 'tile';
view(2)
```

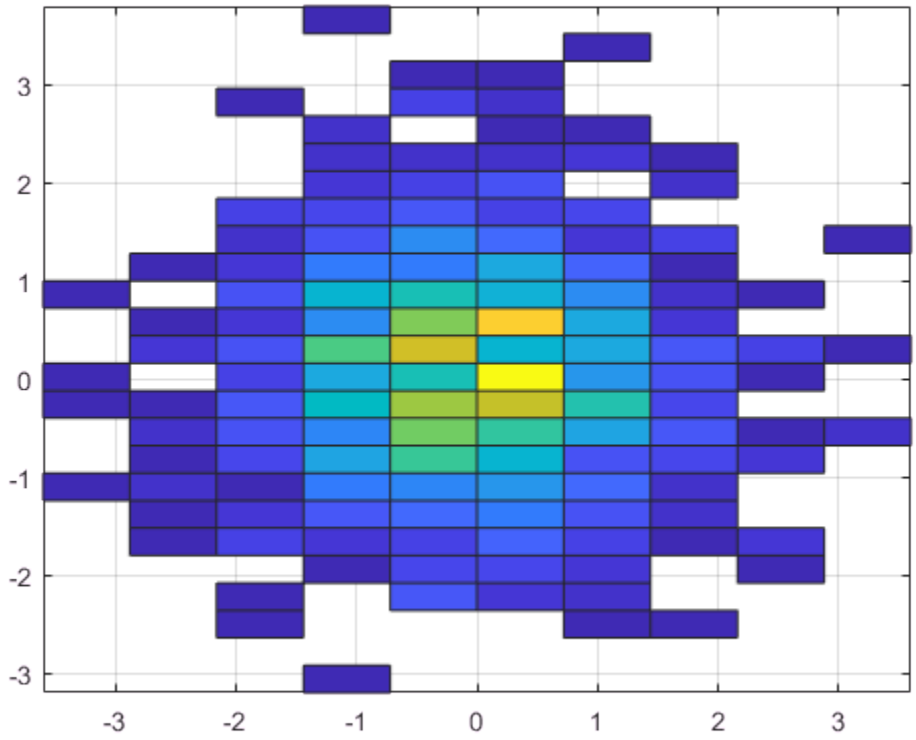

- "Color Analysis with Bivariate Histogram"

Input Arguments

X,Y — Data to distribute among bins (as separate arguments)

vectors | matrices | multidimensional arrays

Data to distribute among bins, specified as separate arguments of vectors, matrices, or multidimensional arrays. `X` and `Y` must be the same size. If `X` and `Y` are not vectors, then `histogram2` treats them as single column vectors, `X(:)` and `Y(:)`, and plots a single histogram.

Corresponding elements in `X` and `Y` specify the *x* and *y* coordinates of 2-D data points, `[X(k),Y(k)]`. The data types of `X` and `Y` can be different, but `histogram2` concatenates these inputs into a single `N`-by-`2` matrix of the dominant data type.

`histogram2` ignores all `NaN` values. Similarly, `histogram2` ignores `Inf` and `-Inf` values, unless the bin edges explicitly specify `Inf` or `-Inf` as a bin edge.

Note: If `X` or `Y` contain integers of type `int64` or `uint64` that are larger than `flintmax`, then it is recommended that you explicitly specify the histogram bin edges.`histogram2` automatically bins the input data using double precision, which lacks integer precision for numbers greater than `flintmax`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`nbins` — Number of bins in each dimension

scalar | vector

Number of bins in each dimension, specified as a positive scalar integer or two-element vector of positive integers. If you do not specify `nbins`, then `histogram2` automatically calculates how many bins to use based on the values in `X` and `Y`.

- If `nbins` is a scalar, then `histogram2` uses that many bins in each dimension.
- If `nbins` is a vector, then `nbins(1)` specifies the number of bins in the *x*-dimension and `nbins(2)` specifies the number of bins in the *y*-dimension.

Example: `histogram2(X,Y,20)` uses 20 bins in each dimension.

Example: `histogram2(X,Y,[10 20])` uses 10 bins in the `x`-dimension and 20 bins in the `y`-dimension.

`Xedges` — Bin edges in *x*-dimension

vector

Bin edges in *x*-dimension, specified as a vector. `Xedges(1)` is the first edge of the first bin in the *x*-dimension, and `Xedges(end)` is the outer edge of the last bin.

The value `[X(k),Y(k)]` is in the `(i,j)`th bin if `Xedges(i)` ≤ `X(k)` < `Xedges(i+1)` **and** `Yedges(j)` ≤ `Y(k)` < `Yedges(j+1)`. The last bins in each dimension also include the last (outer) edge. For example, `[X(k),Y(k)]` falls into the `i`th bin in the last row if `Xedges(end-1)` ≤ `X(k)` ≤ `Xedges(end)` **and** `Yedges(i)` ≤ `Y(k)` < `Yedges(i+1)`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`Yedges` — Bin edges in *y*-dimension
vector

Bin edges in *y*-dimension, specified as a vector. `Yedges(1)` is the first edge of the first bin in the *y*-dimension, and `Yedges(end)` is the outer edge of the last bin.

The value `[X(k),Y(k)]` is in the `(i,j)`th bin if `Xedges(i)` ≤ `X(k)` < `Xedges(i+1)` **and** `Yedges(j)` ≤ `Y(k)` < `Yedges(j+1)`. The last bins in each dimension also include the last (outer) edge. For example, `[X(k),Y(k)]` falls into the `i`th bin in the last row if `Xedges(end-1)` ≤ `X(k)` ≤ `Xedges(end)` **and** `Yedges(i)` ≤ `Y(k)` < `Yedges(i+1)`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`counts` — Bin counts
matrix

Bin counts, specified as a matrix. Use this input to pass bin counts to `histogram2` when the bin counts calculation is performed separately and you do not want `histogram2` to do any data binning.

`counts` must be a matrix of size `[length(XBinEdges)-1 length(YBinEdges)-1]` so that it specifies a bin count for each bin.

Example: `histogram2('XBinEdges',-1:1,'YBinEdges',-2:2,'BinCounts',[1 2 3 4; 5 6 7 8])`

`ax` — Axes object
object

Axes object. If you do not specify an axes, then the `histogram2` function uses the current axes (`gca`).

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `histogram2(X,Y,'BinWidth',[5 10])`

The properties listed here are only a subset. For a complete list, see Histogram2 Properties.

`'BinMethod'` — Binning algorithm
`'auto'` (default) | `'scott'` | `'fd'` | `'integers'`

Binning algorithm, specified as one of the values in this table.

Value	Description
`'auto'`	The default `'auto'` algorithm chooses a bin width to cover the data range and reveal the shape of the underlying distribution.
`'scott'`	Scott's rule is optimal if the data is close to being jointly normally distributed. This rule is appropriate for most other distributions, as well. It uses a bin size of `[3.5*std(X(:))*numel(X)^(-1/4), 3.5*std(Y(:))*numel(Y)^(-1/4)]`.
`'fd'`	The Freedman-Diaconis rule is less sensitive to outliers in the data, and might be more suitable for data with heavy-tailed distributions. It uses a bin size of `[2*IQR(X(:))*numel(X)^(-1/4), 2*IQR(Y(:))*numel(Y)^(-1/4)]`, where `IQR` is the interquartile range.
`'integers'`	The integer rule is useful with integer data, as it creates bins centered on pairs of integers. It uses a bin width of 1 for each dimension and places bin edges halfway between integers. To avoid accidentally creating too many bins, you can use this rule to create a limit of 1024 bins (2^{10}). If the data range for either dimension is greater than 1024, then the integer rule uses wider bins instead.

Note: If you set the `NumBins`, `XBinEdges`, `YBinEdges`, `BinWidth`, or `BinLimits` property, then the `BinMethod` property is set to `'manual'`.

Example: `histogram2(X,Y,'BinMethod','integers')` creates a bivariate histogram with the bins centered on pairs of integers.

`'BinWidth'` — Width of bins in each dimension

vector

Width of bins in each dimension, specified as a two-element vector of positive integers, `[xWidth yWidth]`.

If you specify `BinWidth`, then `histogram2` can use a maximum of 1024 bins (2^{10}) along each dimension. If instead the specified bin width requires more bins, then `histogram2` uses a larger bin width corresponding to the maximum number of bins.

Example: `histogram2(X,Y,'BinWidth',[5 10])` uses bins with size `5` in the `x`-dimension and size `10` in the `y`-dimension.

`'DisplayStyle'` — Histogram display style

`'bar3'` (default) | `'tile'`

Histogram display style, specified as either `'bar3'` or `'tile'`. Specify `'tile'` to display the histogram as a rectangular array of tiles with colors indicating the bin values.

The default value of `'bar3'` displays the histogram using 3-D bars.

Example: `histogram2(X,Y,'DisplayStyle','tile')` plots the histogram as a rectangular array of tiles.

`'EdgeAlpha'` — Transparency of histogram bar edges

`1` (default) | scalar value between `0` and `1` inclusive

Transparency of histogram bar edges, specified as a scalar value between `0` and `1` inclusive. A value of `1` means fully opaque and `0` means completely transparent (invisible).

Example: `histogram2(X,Y,'EdgeAlpha',0.5)` creates a bivariate histogram plot with semi-transparent bar edges.

`'EdgeColor'` — Histogram edge color

`[0.15 0.15 0.15]` (default) | `'none'` | `'auto'` | RGB triplet or color name

Histogram edge color, specified as one of these values:

- `'none'` — Edges are not drawn.
- `'auto'` — Color of each edge is chosen automatically.
- RGB triplet or a color name — Edges use the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `histogram2(X,Y,'EdgeColor','r')` creates a 3-D histogram plot with red bar edges.

`'FaceAlpha'` — Transparency of histogram bars

`1` (default) | scalar value between `0` and `1` inclusive

Transparency of histogram bars, specified as a scalar value between `0` and `1` inclusive. `histogram2` uses the same transparency for all the bars of the histogram. A value of `1` means fully opaque and `0` means completely transparent (invisible).

Example: `histogram2(X,Y,'FaceAlpha',0.5)` creates a bivariate histogram plot with semi-transparent bars.

`'FaceColor'` — Histogram bar color

`'auto'` (default) | `'flat'` | `'none'` | RGB triplet or color name

Histogram bar color, specified as one of these values:

- `'none'` — Bars are not filled.
- `'flat'` — Bar colors vary with height. Bars with different height have different colors. The colors are selected from the figure or axes colormap.
- `'auto'` — Bar color is chosen automatically (default).
- RGB triplet or a color name — Bars are filled with the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

If you specify `DisplayStyle` as `'stairs'`, then `histogram2` does not use the `FaceColor` property.

Example: `histogram2(X,Y,'FaceColor','g')` creates a 3-D histogram plot with green bars.

`'FaceLighting'` — Lighting effect on histogram bars

`'lit'` (default) | `'flat'` | `'none'`

Lighting effect on histogram bars, specified as one of the values in this table.

Value	Description
`'lit'`	Histogram bars display a pseudo-lighting effect, where the sides of the bars use darker colors relative to the tops. The bars

Value	Description
	are unaffected by other light sources in the axes. This is the default value when `DisplayStyle` is `'bar3'`.
`'flat'`	Histogram bars are not lit automatically. In the presence of other light objects, the lighting effect is uniform across the bar faces.
`'none'`	Histogram bars are not lit automatically, and lights do not affect the histogram bars. `FaceLighting` can only be `'none'` when `DisplayStyle` is `'tile'`.

Example: `histogram2(X,Y,'FaceLighting','none')` turns off the lighting of the histogram bars.

`'LineStyle'` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Width of bar outlines

`0.5` (default) | positive value

Width of bar outlines, specified as a positive value in point units. One point equals 1/72 inch.

Example: `1.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'Normalization'` — Type of normalization

`'count'` (default) | `'probability'` | `'countdensity'` | `'pdf'` | `'cumcount'` | `'cdf'`

Type of normalization, specified as one of the values in this table. For each bin `i`:

- v_i is the bin value.
- c_i is the number of elements in the bin.
- $A_i = w_{xi} \cdot w_{yi}$ is the area of each bin, computed using the x and y bin widths.
- N is the number of elements in the input data. This value can be greater than the binned data if the data contains `NaN` values, or if some of the data lies outside the bin limits.

Value	Bin Values	Notes
`'count'` (default)	$v_i = c_i$	• Count or frequency of observations. • Sum of bin values is less than or equal to `numel(X)` and `numel(y)`. The sum is less than `numel(X)` and `numel(y)` only when some of the input data is not included in the bins.
`'countdensity'`	$v_i = \frac{c_i}{A_i}$	• Count or frequency scaled by area of bin. • The volume (height * area) of each bar is the number of observations in the bin. The sum of the bar volumes is less than

Value	Bin Values	Notes
		or equal to `numel(X)` and `numel(y)`.
`'cumcount'`	$v_i = \sum_{j=1}^{i} c_j$	• Cumulative count. Each bin value is the cumulative number of observations in each bin and all previous bins in both the x and y dimensions. • The height of the last bar is less than or equal to `numel(X)` and `numel(Y)`.
`'probability'`	$v_i = \frac{c_i}{N}$	• Relative probability. • The sum of the bar heights is less than or equal to `1`.
`'pdf'`	$v_i = \frac{c_i}{N \cdot A_i}$	• Probability density function estimate. • The volume of each bar is the relative number of observations. The sum of the bar volumes is less than or equal to `1`.
`'cdf'`	$v_i = \sum_{j=1}^{i} \frac{c_j}{N}$	• Cumulative density function estimate. • The height of each bar is equal to the cumulative relative number of observations in each bin and all previous bins in both the x and y dimensions. The height of the last bar is less than or equal to `1`.

Example: `histogram2(X,Y,'Normalization','pdf')` plots an estimate of the probability density function for `X` and `Y`.

`'ShowEmptyBins'` — Toggle display of empty bins
`'off'` (default) | `'on'`

Toggle display of empty bins, specified as either `'off'` or `'on'`. The default value is `'off'`.

Example: `histogram2(X,Y,'ShowEmptyBins','on')` turns on the display of empty bins.

`'XBinLimits'` — Bin limits in *x*-dimension
vector

Bin limits in *x*-dimension, specified as a two-element vector, `[xbmin,xbmax]`. The vector indicates the first and last bin edges in the *x*-dimension.

`histogram2` only plots data that falls within the bin limits inclusively, `Data(Data(:,1)>=xbmin & Data(:,1)<=xbmax)`.

`'XBinLimitsMode'` — Selection mode for bin limits in *x*-dimension
`'auto'` (default) | `'manual'`

Selection mode for bin limits in *x*-dimension, specified as `'auto'` or `'manual'`. The default value is `'auto'`, so that the bin limits automatically adjust to the data along the x-axis.

If you explicitly specify either `XBinLimits` or `XBinEdges`, then `XBinLimitsMode` is set automatically to `'manual'`. In that case, specify `XBinLimitsMode` as `'auto'` to rescale the bin limits to the data.

`'YBinLimits'` — Bin limits in *y*-dimension
vector

Bin limits in *y*-dimension, specified as a two-element vector, `[ybmin,ybmax]`. The vector indicates the first and last bin edges in the *y*-dimension.

`histogram2` only plots data that falls within the bin limits inclusively, `Data(Data(:,2)>=ybmin & Data(:,2)<=ybmax)`.

`'YBinLimitsMode'` — Selection mode for bin limits in *y*-dimension
`'auto'` (default) | `'manual'`

Selection mode for bin limits in *y*-dimension, specified as `'auto'` or `'manual'`. The default value is `'auto'`, so that the bin limits automatically adjust to the data along the y-axis.

If you explicitly specify either `YBinLimits` or `YBinEdges`, then `YBinLimitsMode` is set automatically to `'manual'`. In that case, specify `YBinLimitsMode` as `'auto'` to rescale the bin limits to the data.

Output Arguments

h — Bivariate histogram
object

Bivariate histogram, returned as an object. For more information, see Histogram2.

Tips

- Histogram plots created using `histogram2` have a context menu in plot edit mode that enables interactive manipulations in the figure window. For example, you can use the context menu to interactively change the number of bins, align multiple histograms, or change the display order.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- Some input options are not supported. The allowed options are:
  - `'BinWidth'`

  - `'XBinLimits'`
  - `'YBinLimits'`
  - `'Normalization'`
  - `'DisplayStyle'`
  - `'BinMethod'` — The `'auto'` and `'scott'` bin methods are the same. The `'fd'` bin method is not supported.
  - `'EdgeAlpha'`
  - `'EdgeColor'`
  - `'FaceAlpha'`
  - `'FaceColor'`
  - `'LineStyle'`
  - `'LineWidth'`
  - `'Orientation'`
- Additionally, there is a cap on the maximum number of bars. The default maximum is 100.
- The `morebins` and `fewerbins` methods are not supported.
- Editing properties of the histogram object that require recomputing the bins is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`bar3` | `discretize` | `fewerbins` | `histcounts` | `histcounts2` | `histogram` | `morebins`

Topics

“Color Analysis with Bivariate Histogram”
Histogram2

Introduced in R2015b

histogram2

Histogram bar plot for bivariate data

Description

Bivariate histograms are a type of bar plot for numeric data that group the data into 2-D bins. After you create a `histogram2` object, you can modify aspects of the histogram by changing its property values. This is particularly useful for quickly modifying the properties of the bins or changing the display.

Create Object

Specify an output argument with the `histogram2` function to create a `Histogram2` object.

Properties

Histogram2 Properties	Control histogram2 appearance and behavior

Object Functions

morebins	Increase number of histogram bins
fewerbins	Decrease number of histogram bins

Examples

Adjust Properties of Histogram2 Object

This example creates a histogram2 object, and then shows how to adjust the properties of the histogram to affect the output display.

Generate 1,000 random numbers in each dimension and create a bivariate histogram.

```
x = randn(1000,1);
y = randn(1000,1);
h = histogram2(x,y)

h =
  Histogram2 with properties:

             Data: [1000×2 double]
           Values: [15×15 double]
          NumBins: [15 15]
        XBinEdges: [-3.5000 -3 -2.5000 -2 -1.5000 -1 -0.5000 0 0.5000 1 1.5000 2 2.5000
        YBinEdges: [-3.5000 -3 -2.5000 -2 -1.5000 -1 -0.5000 0 0.5000 1 1.5000 2 2.5000
         BinWidth: [0.5000 0.5000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0.1500 0.1500 0.1500]

  Show all properties
```

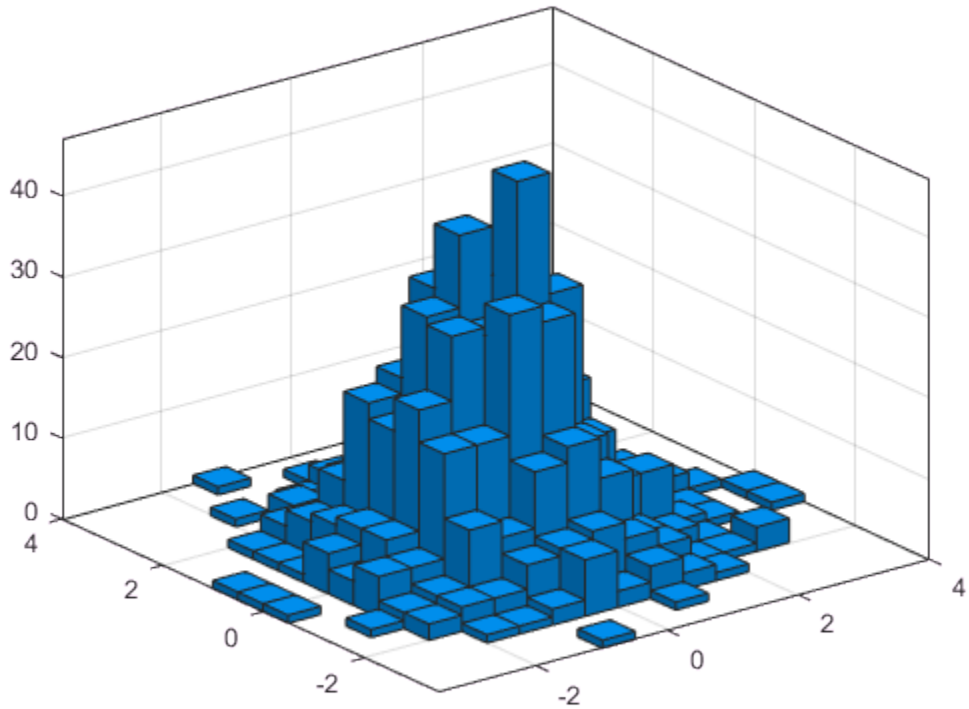

Change the normalization of the histogram by setting the `Normalization` property to `'probability'`.

```
h.Normalization = 'probability';
```

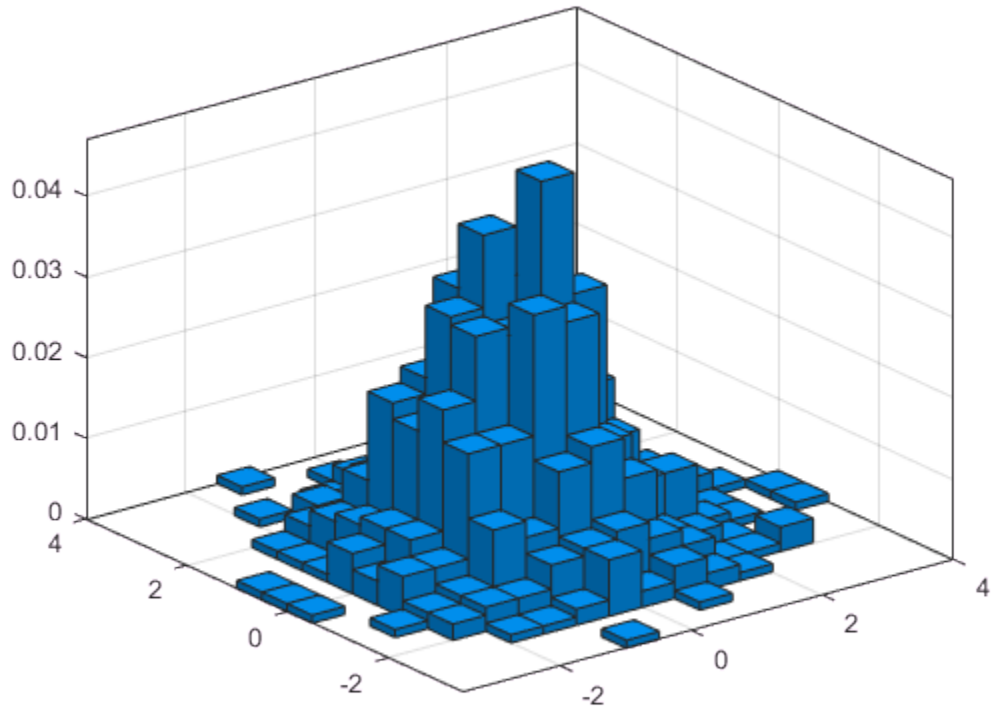

Change the bin limits in each dimension so that $-5 \le x \le 5$ and $-2 \le y \le 2$. When you set `XBinLimits` or `YBinLimits`, the `XBinLimitsMode` or `YBinLimitsMode` property automatically changes to `'manual'`.

```
h.XBinLimits = [-5 5];
h.YBinLimits = [-2 2];
```

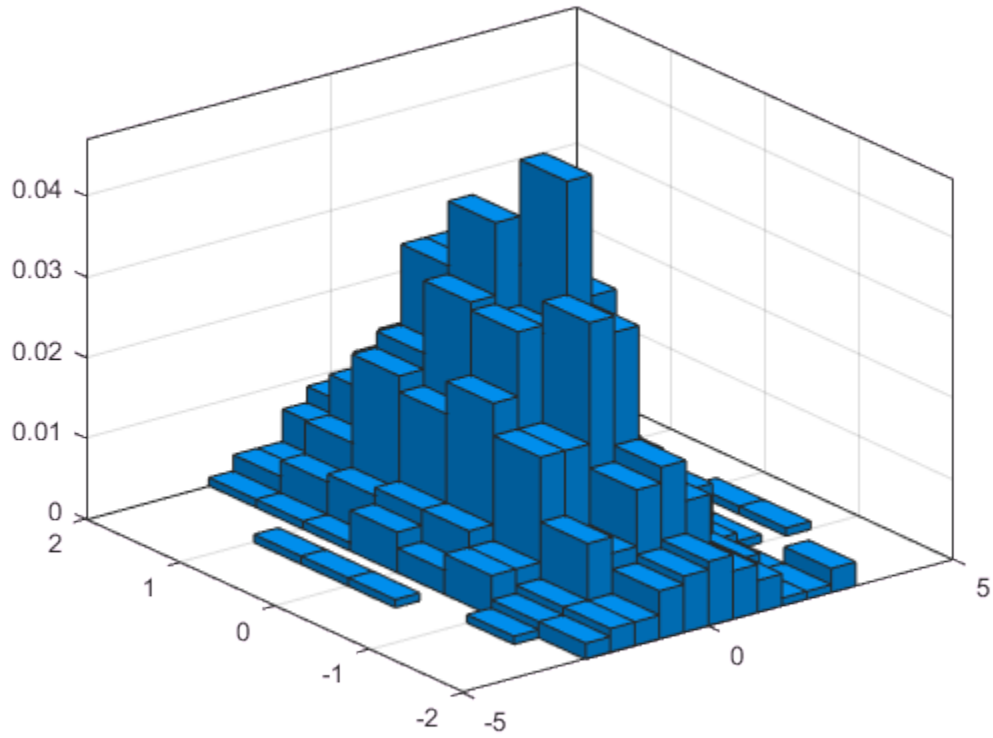

Show the empty bins.

```
h.ShowEmptyBins = 'on';
```

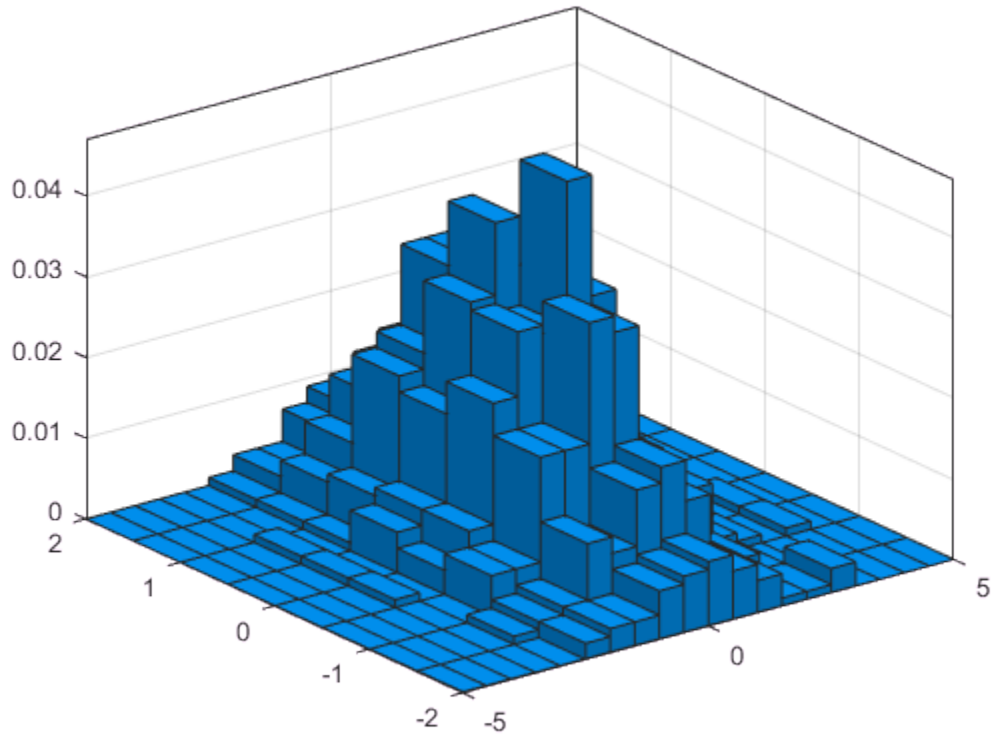

Change the display style to show tiles. Switch to a 2-D view.

```
h.DisplayStyle = 'tile';
view(2)
```

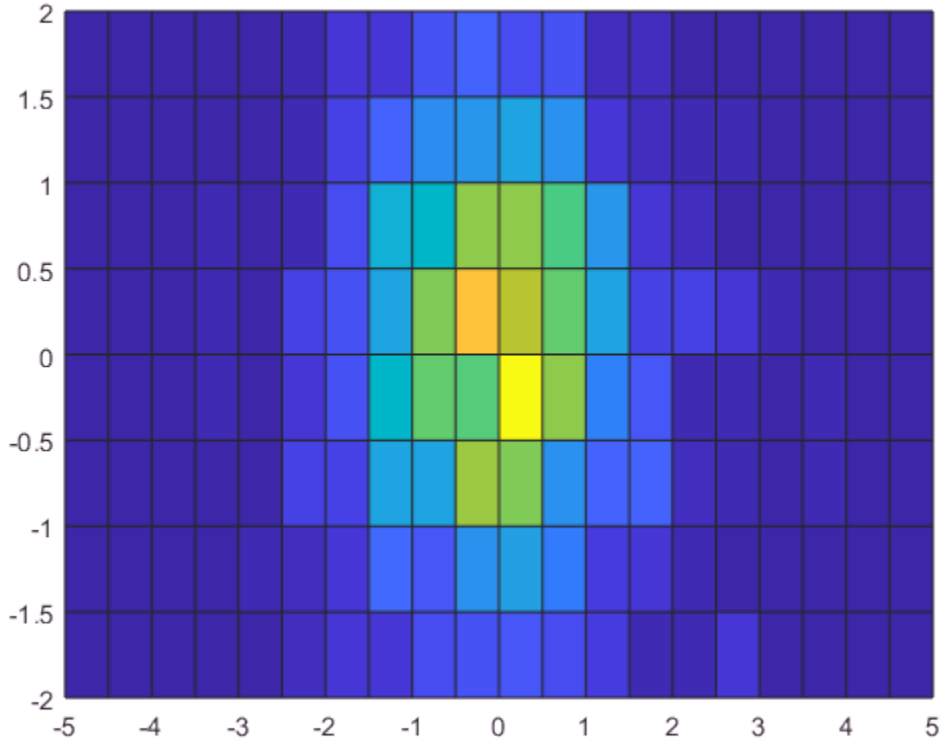

Saving and Loading Histogram2 Objects

Use the `savefig` function to save a histogram2 figure.

```
y = histogram2(randn(100,1),randn(100,1));
savefig('histogram2.fig');
clear all
close all
```

Use `openfig` to load the histogram figure back into MATLAB. `openfig` also returns a handle to the figure, `h`.

```
h = openfig('histogram2.fig');
```

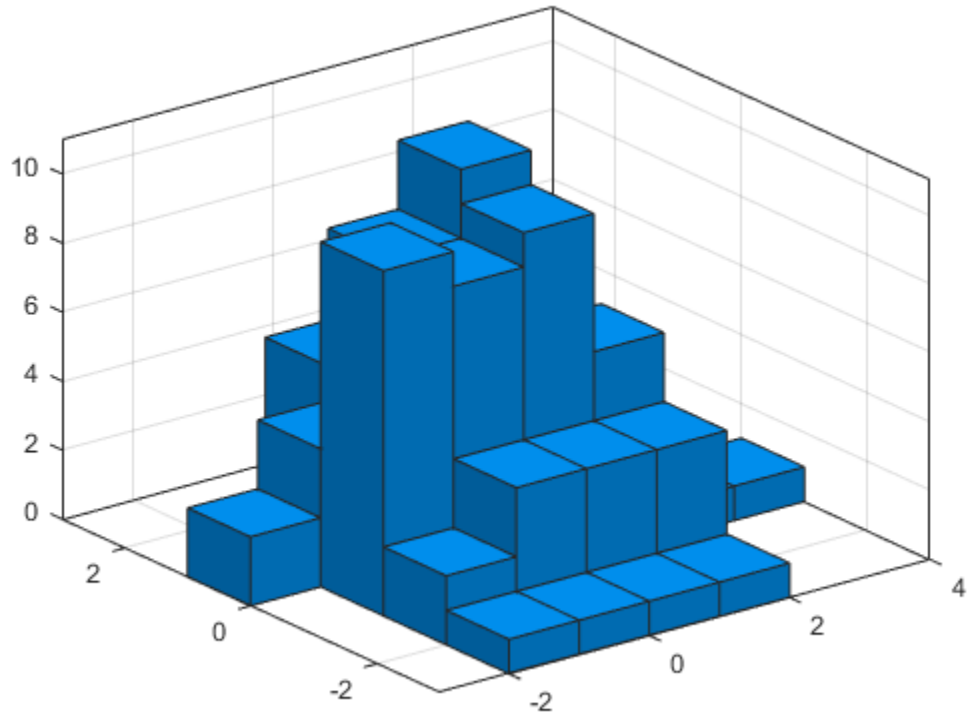

Use the `findobj` function to locate the correct object handle from the figure handle. This allows you to continue manipulating the original histogram object used to generate the figure.

```
y = findobj(h, 'type', 'histogram2')
```

```
y =

  Histogram2 with properties:

             Data: [100×2 double]
           Values: [7×6 double]
          NumBins: [7 6]
```

```
       XBinEdges: [-3 -2 -1 0 1 2 3 4]
       YBinEdges: [-3 -2 -1 0 1 2 3]
        BinWidth: [1 1]
   Normalization: 'count'
       FaceColor: 'auto'
       EdgeColor: [0.1500 0.1500 0.1500]

  Use GET to show all properties
```

See Also

See Also

histcounts | histcounts2 | histogram | histogram2

Topics

Histogram2 Properties

Introduced in R2015b

Histogram2 Properties

Control histogram2 appearance and behavior

Description

Histogram2 properties control the appearance and behavior of the histogram. By changing property values, you can modify aspects of the histogram. Use dot notation to refer to a particular object and property:

```
h = histogram2(randn(10,1),randn(10,1));
c = h.NumBins;
h.NumBins = [4 7];
```

Bins

`BinCounts` — Bin counts
matrix

Bin counts, specified as a matrix. Use this input to pass bin counts to `histogram2` when the bin counts calculation is performed separately and you do not want `histogram2` to do any data binning.

`counts` must be a matrix of size `[nbinsX nbinsY]` so that it specifies a bin count for each bin.

The number of bins in the *x*-dimension is `length(XBinEdges)-1`, and the number of bins in the *y*-dimension is `length(YBinEdges)-1`.

Compared to the `Values` property, `BinCounts` is not normalized. If `Normalization` is `'count'`, then `Values` and `BinCounts` are equivalent.

Example: `histogram2('XBinEdges',-1:1,'YBinEdges',-2:2,'BinCounts',[1 2 3 4; 5 6 7 8])`

`BinCountsMode` — Selection mode for bin counts
`'auto'` (default) | `'manual'`

Selection mode for bin counts, specified as `'auto'` or `'manual'`. The default value is `'auto'`, so that the bin counts are automatically computed from `Data`, `XBinEdges`, and `YBinEdges`.

If you specify `BinCounts`, then `BinCountsMode` is automatically set to `'manual'`. Similarly, if you specify `Data`, then `BinCountsMode` is automatically set to `'auto'`.

`BinMethod` — Binning algorithm

`'auto'` (default) | `'scott'` | `'fd'` | `'integers'`

Binning algorithm, specified as one of the values in this table.

Value	Description
`'auto'`	The default `'auto'` algorithm chooses a bin width to cover the data range and reveal the shape of the underlying distribution.
`'scott'`	Scott's rule is optimal if the data is close to being jointly normally distributed. This rule is appropriate for most other distributions, as well. It uses a bin size of `[3.5*std(X(:))*numel(X)^(-1/4), 3.5*std(Y(:))*numel(Y)^(-1/4)]`.
`'fd'`	The Freedman-Diaconis rule is less sensitive to outliers in the data, and might be more suitable for data with heavy-tailed distributions. It uses a bin size of `[2*IQR(X(:))*numel(X)^(-1/4), 2*IQR(Y(:))*numel(Y)^(-1/4)]`, where `IQR` is the interquartile range.
`'integers'`	The integer rule is useful with integer data, as it creates a bin for each pair of integers `X` and `Y`. It uses a bin width of 1 for each dimension and places bin edges halfway between integers. To avoid accidentally creating too many bins, you can use this rule to create a limit of 1024 bins (2^{10}). If the data range for either dimension is greater than 1024, then the integer rule uses wider bins instead.

Note: If you set the `NumBins`, `XBinEdges`, `YBinEdges`, `BinWidth`, or `BinLimits` property, then the `BinMethod` property is set to `'manual'`.

Example: `histogram2(X,Y,'BinMethod','integers')` creates a bivariate histogram with the bins centered on integers.

`BinWidth` — Width of bins in each dimension

vector

Width of bins in each dimension, specified as a two-element vector. The first element in the vector gives the width of the bins in the *x*-dimension, and the second element gives the width of the bins in the *y*-dimension.

When you specify `BinWidth`, then `histogram2` can use a maximum of 1024 bins (2^{10}) along each dimension. If instead the specified bin width requires more bins, then `histogram2` uses a larger bin width corresponding to the maximum number of bins.

Example: `histogram2(X,Y,'BinWidth',[5 10])` uses bins with size `5` in the `x`-dimension and size `10` in the `y`-dimension.

`EdgeAlpha` — Transparency of histogram bar edges

`1` (default) | scalar value between `0` and `1` inclusive

Transparency of histogram bar edges, specified as a scalar value between `0` and `1` inclusive. A value of `1` means fully opaque and `0` means completely transparent (invisible).

Example: `histogram2(X,Y,'EdgeAlpha',0.5)` creates a bivariate histogram plot with semi-transparent bar edges.

`EdgeColor` — Histogram edge color

`[0.15 0.15 0.15]` (default) | `'none'` | `'auto'` | RGB triplet or color name

Histogram edge color, specified as one of these values:

- `'none'` — Edges are not drawn.
- `'auto'` — Color of each edge is chosen automatically.
- RGB triplet or a color name — Edges use the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: histogram2(X,Y,'EdgeColor','r') creates a histogram plot with red bar edges.

FaceAlpha — Transparency of histogram bars

1.0 (default) | scalar value between 0 and 1 inclusive

Transparency of histogram bars, specified as a scalar value between 0 and 1 inclusive. histogram2 uses the same transparency for all the bars of the histogram. A value of 1 means fully opaque and 0 means completely transparent (invisible).

Example: histogram2(X,Y,'FaceAlpha',0.5) creates a bivariate histogram plot with semi-transparent bars.

FaceColor — Histogram bar color

'auto' (default) | 'flat' | 'none' | RGB triplet or color name

Histogram bar color, specified as one of these values:

- 'none' — Bars are not filled.
- 'flat' — Bar colors vary with height. Bars with different height have different colors. The colors are selected from the figure or axes colormap.
- 'auto' — Bar color is chosen automatically (default).
- RGB triplet or a color name — Bars are filled with the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

If you specify `DisplayStyle` as `'stairs'`, then `histogram2` does not use the `FaceColor` property.

Example: `histogram2(X,Y,'FaceColor','g')` creates a histogram plot with green bars.

`FaceLighting` — Lighting effect on histogram bars

`'lit'` (default) | `'flat'` | `'none'`

Lighting effect on histogram bars, specified as one of the values in the table.

Value	Description
`'lit'`	Histogram bars display a pseudo-lighting effect, where the sides of the bars use darker colors relative to the tops. The bars are unaffected by other light sources in the axes. This is the default value when `DisplayStyle` is `'bar3'`.
`'flat'`	Histogram bars are not lit automatically. In the presence of other light objects, the

Value	Description
	lighting effect is uniform across the bar faces.
`'none'`	Histogram bars are not lit automatically, and lights do not affect the histogram bars. `FaceLighting` can only be `'none'` when `DisplayStyle` is `'tile'`.

Example: `histogram2(X,Y,'FaceLighting','none')` turns off the lighting of the histogram bars.

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Width of bar outlines

`0.5` (default) | positive value

Width of bar outlines, specified as a positive value in point units. One point equals 1/72 inch.

Example: `1.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Normalization` — Type of normalization

`'count'` (default) | `'probability'` | `'countdensity'` | `'pdf'` | `'cumcount'` | `'cdf'`

Type of normalization, specified as one of the values in the table.

Value	Description
`'count'`	Default normalization scheme. The height of each bar is the number of observations in each bin. The sum of the bar heights is equal to `numel(X)` and `numel(Y)`.
`'probability'`	The height of each bar is the relative number of observations, (Number of observations in bin / Total number of observations). The sum of the bar heights is `1`.
`'countdensity'`	The height of each bar is (Number of observations in bin) / (Area of bin). The volume (Height * Area) of each bar is the number of observations in the bin. The sum of the bar volumes is equal to `numel(X)` and `numel(Y)`.
`'pdf'`	Probability density function estimate. The height of each bar is, (Number of observations in the bin) / (Total number of observations * Area of bin). The volume of each bar is the relative number of observations. The sum of the bar volumes is `1`.
`'cumcount'`	The height of each bar is the cumulative number of observations in each bin and all previous bins in both the *x* and *y* dimensions. The height of the last bar is equal to `numel(X)` and `numel(Y)`.
`'cdf'`	Cumulative density function estimate. The height of each bar is equal to the cumulative relative number of observations in each bin and all previous bins in both the *x* and *y* dimensions. The height of the last bar is `1`.

Example: `histogram2(X,Y,'Normalization','pdf')` plots an estimate of the probability density function for `X` and `Y`.

`NumBins` — Number of bins in each dimension

vector

Number of bins in each dimension, specified as a two-element vector of positive integers, `[nX nY]`. If you do not specify `NumBins`, then `histogram2` automatically calculates how many bins to use based on the values in `X` and `Y`.

Example: `histogram2(X,Y,[10 20])`

Example: `h.NumBins = [10 20]`

`ShowEmptyBins` — Toggle display of empty bins

`'off'` (default) | `'on'`

Toggle display of empty bins, specified as either `'off'` or `'on'`. The default value is `'off'`.

Example: `histogram2(X,Y,'ShowEmptyBins','on')` turns on the display of empty bins.

`XBinEdges` — Bin edges in *x*-dimension

vector

Bin edges in *x*-dimension, specified as a vector. `Xedges(1)` is the first edge of the first bin in the *x*-dimension, and `Xedges(end)` is the outer edge of the last bin.

The value `[X(k),Y(k)]` is in the `(i,j)`th bin if `Xedges(i)` ≤ `X(k)` < `Xedges(i+1)` **and** `Yedges(j)` ≤ `Y(k)` < `Yedges(j+1)`. The last bins in each dimension also include the last (outer) edge. For example, `[X(k),Y(k)]` falls into the `i`th bin in the last row if `Xedges(end-1)` ≤ `X(k)` ≤ `Xedges(end)` **and** `Yedges(i)` ≤ `Y(k)` < `Yedges(i+1)`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`XBinLimits` — Bin limits in `x`-dimension

vector

Bin limits in `x`-dimension, specified as a two-element vector, `[xbmin,xbmax]`. The vector indicates the first and last bin edges in the `x`-dimension.

`histogram2` only plots data that falls within the bin limits inclusively, `Data(Data(:,1)>=xbmin & Data(:,1)<=xbmax)`.

`XBinLimitsMode` — Selection mode for bin limits in x-dimension
`'auto'` (default) | `'manual'`

Selection mode for bin limits in `x`-dimension, specified as `'auto'` or `'manual'`. The default value is `'auto'`, so that the bin limits automatically adjust to the data along the x-axis.

If you explicitly specify either `XBinLimits` or `XBinEdges`, then `XBinLimitsMode` is set automatically to `'manual'`. In that case, specify `XBinLimitsMode` as `'auto'` to rescale the bin limits to the data.

`YBinEdges` — Bin edges in *y*-dimension
vector

Bin edges in *y*-dimension, specified as a vector. `Yedges(1)` is the first edge of the first bin in the *y*-dimension, and `Yedges(end)` is the outer edge of the last bin.

The value `[X(k),Y(k)]` is in the `(i,j)`th bin if `Xedges(i)` ≤ `X(k)` < `Xedges(i+1)` **and** `Yedges(j)` ≤ `Y(k)` < `Yedges(j+1)`. The last bins in each dimension also include the last (outer) edge. For example, `[X(k),Y(k)]` falls into the `i`th bin in the last row if `Xedges(end-1)` ≤ `X(k)` ≤ `Xedges(end)` **and** `Yedges(i)` ≤ `Y(k)` < `Yedges(i+1)`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`YBinLimits` — Bin limits in y-dimension
vector

Bin limits in `y`-dimension, specified as a two-element vector, `[ybmin,ybmax]`. The vector indicates the first and last bin edges in the `y`-dimension.

`histogram2` only plots data that falls within the bin limits inclusively, `Data(Data(:,2)>=ybmin & Data(:,2)<=ybmax)`.

`YBinLimitsMode` — Selection mode for bin limits in y-dimension
`'auto'` (default) | `'manual'`

Selection mode for bin limits in `y`-dimension, specified as `'auto'` or `'manual'`. The default value is `'auto'`, so that the bin limits automatically adjust to the data along the y-axis.

If you explicitly specify either `YBinLimits` or `YBinEdges`, then `YBinLimitsMode` is set automatically to `'manual'`. In that case, specify `YBinLimitsMode` as `'auto'` to rescale the bin limits to the data.

Data

`Data` — Data to distribute among bins

matrix

Data to distribute among bins, specified as a matrix of size `m`-by-`2`. The `X` and `Y` inputs to `histogram2` correspond to the columns in `Data`, that is, `Data(:,1)` is `X(:)` and `Data(:,2)` is `Y(:)`.

`histogram2` ignores all `NaN` values. Similarly,`histogram2` ignores `Inf` and `-Inf` values, unless the bin edges explicitly specify `Inf` or `-Inf` as a bin edge.

If you change the values in the `Data` property of a `histogram2` object, then the bin edges are not automatically updated. To recompute the bins, adjust a bin-related property such as `BinMethod` or `NumBins`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`Values` — Bin values

matrix

This property is read-only.

Bin values, returned as a numeric matrix. If `Normalization` is `'count'`, then the `(i,j)`th entry in `Values` specifies the bin count for the bin whose x edges are `[Xedges(i), Xedges(i+1)]` and whose y edges are `[Yedges(j), Yedges(j+1)]`.

Depending on the value of `Normalization`, the `Values` property instead can contain a normalized variant of the bin counts.

The bin inclusion scheme for the different numbered bins in `Values`, as well as their relative orientation to the x-axis and y-axis, is

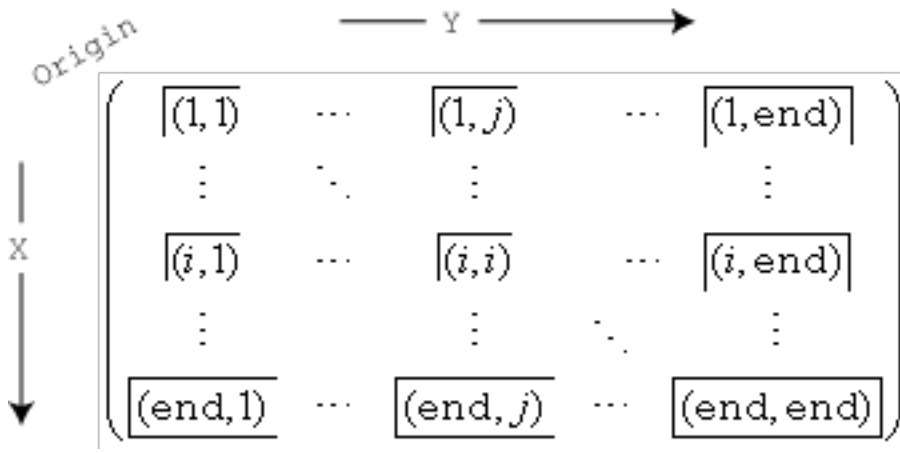

For example, the `(1,1)` bin includes values that fall on the first edge in each dimension, and the last bin in the bottom right includes values that fall on any of its edges.

Histogram Type

`DisplayStyle` — Histogram display style
`'bar3'` (default) | `'tile'`

Histogram display style, specified as either `'bar3'` or `'tile'`. Specify `'tile'` to display the histogram as a rectangular array of tiles with colors indicating the bin values.

The default value of `'bar3'` displays the histogram using 3-D bars.

Example: `histogram2(X,Y,'DisplayStyle','tile')` plots the histogram as a rectangular array of tiles.

Visibility

`Visible` — State of visibility
`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.

- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

Identifiers

`Type` — Type of graphics object

`'histogram2'` (default)

This property is read-only.

Type of graphics object, returned as `'histogram2'`. Use this property to find all objects of a given type within a plotting hierarchy, such as searching for the type using `findobj`.

`Tag` — Tag to associate with histogram2

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

Data Types: `char`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used by legend

variable names of `Data` or `''` (default) | character vector

Text used by the legend, specified as a character vector. The text appears next to an icon of the histogram2.

Example: `'Text Description'`

For multiline text, create the character vector using `sprintf` with the new line character `\n`.

Example: `sprintf('line one\nline two')`

Alternatively, you can specify the legend text using the `legend` function.

- If you specify the text as an input argument to the `legend` function, then the legend uses the specified text and sets the `DisplayName` property to the same value.
- If you do not specify the text as an input argument to the `legend` function, then the legend uses the text in the `DisplayName` property. By default, `DisplayName` is a character vector representing the variable names of the *x* and *y* input data used to construct the histogram. If one or both of the inputs do not have variable names, then `DisplayName` is empty, `''`.

If the `DisplayName` property does not contain any text, then the legend generates a character vector. The character vector has the form `'dataN'`, where `N` is the number assigned to the histogram2 object based on its location in the list of legend entries.

If you edit interactively the character vector in an existing legend, then MATLAB updates the `DisplayName` property to the edited character vector.

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
```

```
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the `Histogram2` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Histogram2` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Histogram2` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Histogram2` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Histogram2` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Histogram2` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Histogram2` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Histogram2` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments

- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`histogram2`

Topics

"Access Property Values"
histogram2

Introduced in R2015b

hms

Hour, minute, and second numbers of duration

Syntax

```
[h,m,s] = hms(t)
```

Description

`[h,m,s] = hms(t)` returns the hour, minute, and second values of the datetime values in `t` as separate numeric arrays. The `h` and `m` outputs contain integer values, and the `s` output can contain a fractional part. `h`, `m`, and `s` are the same size as `t`.

Calling `hms` is equivalent to calling the `hour`, `minute`, and `second` functions.

Examples

Find Hour, Minute, and Second Numbers of datetime Array

```
t1 = datetime('now','Format','HH:mm:ss.SSS');
t = t1 + minutes(0:45:135)
```

```
t = 1×4 datetime array
   12:46:26.493   13:31:26.493   14:16:26.493   15:01:26.493
```

```
[h,m,s] = hms(t)
```

```
h =

    12    13    14    15


m =
```

```
    46    31    16     1

s =

   26.4930   26.4930   26.4930   26.4930
```

`hms` returns the hour, minute, and second numbers in separate arrays.

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

Output Arguments

`h` — Hour numbers

numeric array

Hour numbers, returned as a numeric array of integer values from 0 to 23. The `h` output is of type `double` and is the same size as `t`.

`m` — Minute numbers

numeric array

Minute numbers, returned as a numeric array of integer values from 0 to 59. The `m` output is of type `double` and is the same size as `t`.

`s` — Second numbers

numeric array

Second numbers, returned as a numeric array of values from 0 to less than 60, and can include a fractional part. For datetime values whose time zone is `UTCLeapSeconds`, the `s` output can contain a value between 60 and 61 for times that fall during a leap second occurrence. The `s` output is of type `double` and is the same size as `t`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`hour` | `minute` | `second` | `ymd`

Introduced in R2014b

hold

Retain current plot when adding new plots

Syntax

```
hold on
hold off
hold all
hold

hold(ax, ___ )
```

Description

`hold on` retains plots in the current axes so that new plots added to the axes do not delete existing plots. New plots use the next colors and line styles based on the `ColorOrder` and `LineStyleOrder` properties of the axes. MATLAB adjusts axes limits, tick marks, and tick labels to display the full range of data. If axes do not exist, then the `hold` command creates them.

`hold off` sets the hold state to off so that new plots added to the axes clear existing plots and reset all axes properties. The next plot added to the axes uses the first color and line style based on the `ColorOrder` and `LineStyleOrder` properties of the axes. This option is the default behavior.

`hold all` is the same as `hold on`. This syntax will be removed in a future release. Use `hold on` instead.

`hold` toggles the hold state between on and off.

`hold(ax, ___ )` sets the hold state for the axes specified by `ax` instead of the current axes. Specify the axes as the first input argument for any of the previous syntaxes. Use single quotes around the `'on'` and `'off'` inputs, such as `hold(ax,'on')`.

Examples

Add Line Plot to Existing Axes

Create a line plot. Use `hold on` to add a second line plot without deleting the existing line plot. The new plot uses the next color and line style based on the `ColorOrder` and `LineStyleOrder` properties of the axes. Then reset the hold state to off.

```
x = linspace(-pi,pi);
y1 = sin(x);
plot(x,y1)

hold on
y2 = cos(x);
plot(x,y2)
hold off
```

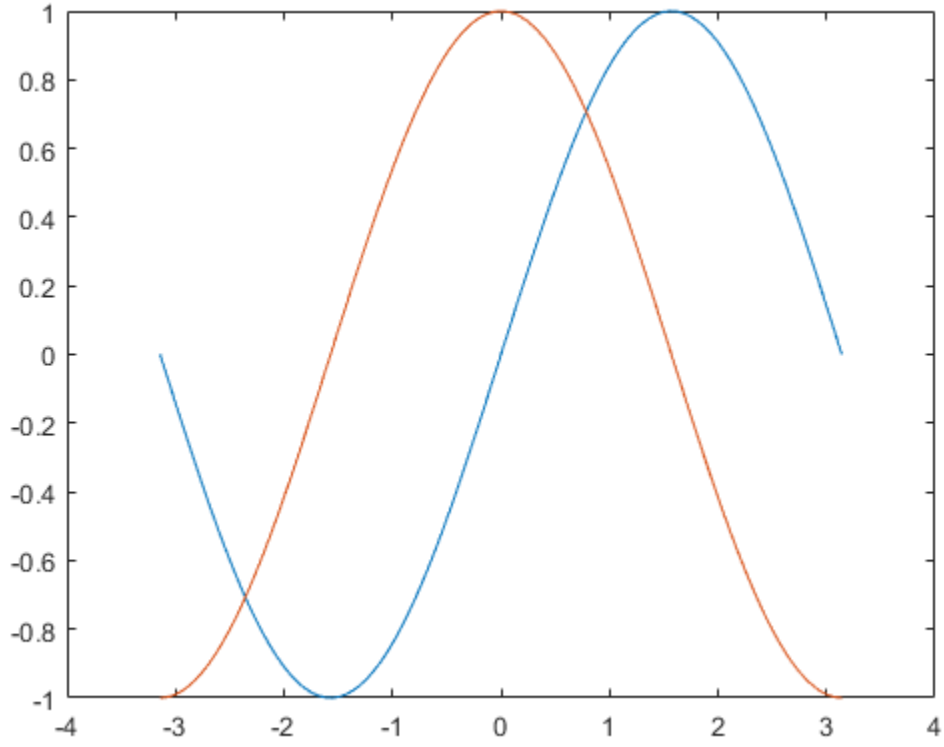

When the hold state is off, new plots delete existing plots. New plots start from the beginning of the color order and line style order.

```
y3 = sin(2*x);
plot(x,y3)
```

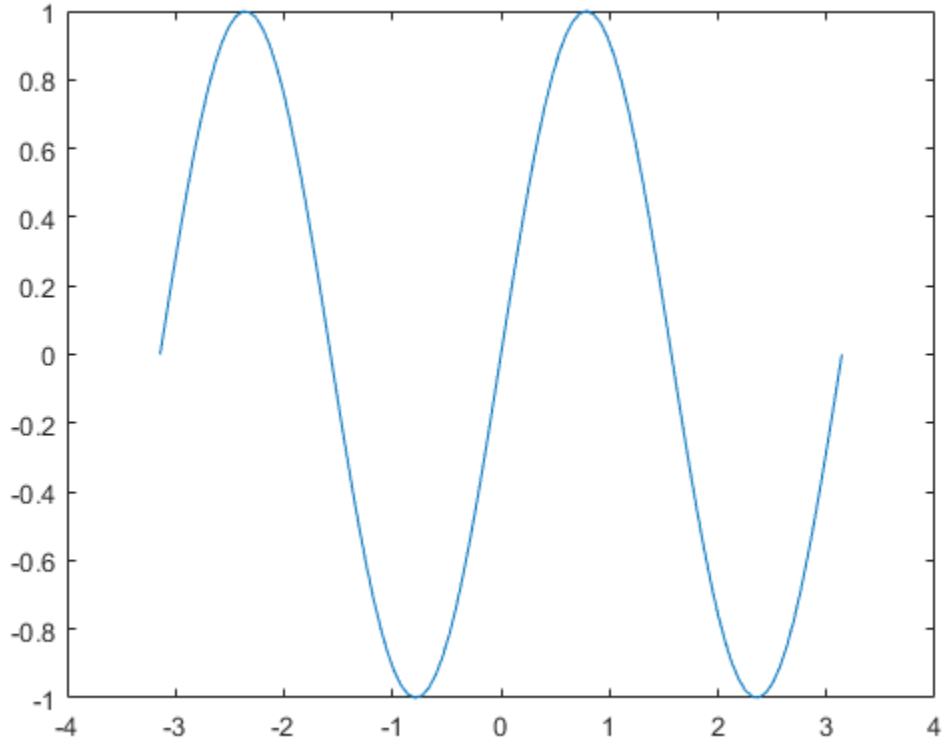

Specify Hold State for Specific Axes

Create a figure with two subplots and assign the `Axes` objects to the variables `ax1` and `ax2`. Add a line plot to each subplot. Then add a second line plot to the upper subplot.

```
ax1 = subplot(2,1,1);
x = linspace(0,10);
y1 = sin(x);
plot(ax1,x,y1)

ax2 = subplot(2,1,2);
y2 = cos(x);
plot(ax2,x,y2)
```

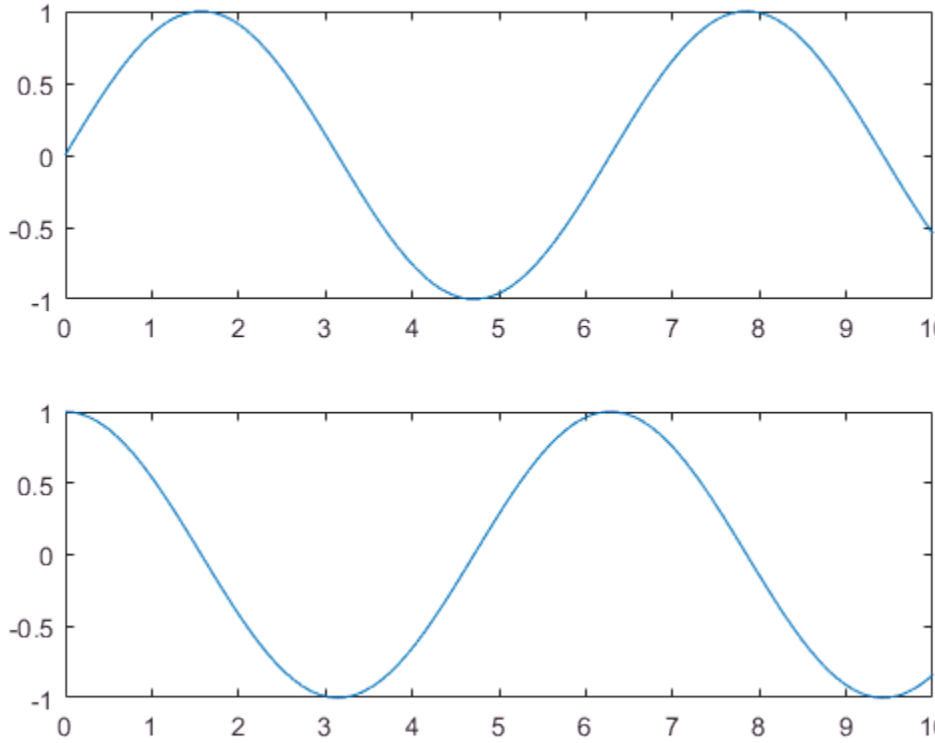


```
hold(ax1,'on')
y3 = sin(2*x);
plot(ax1,x,y3)
hold(ax1,'off')
```

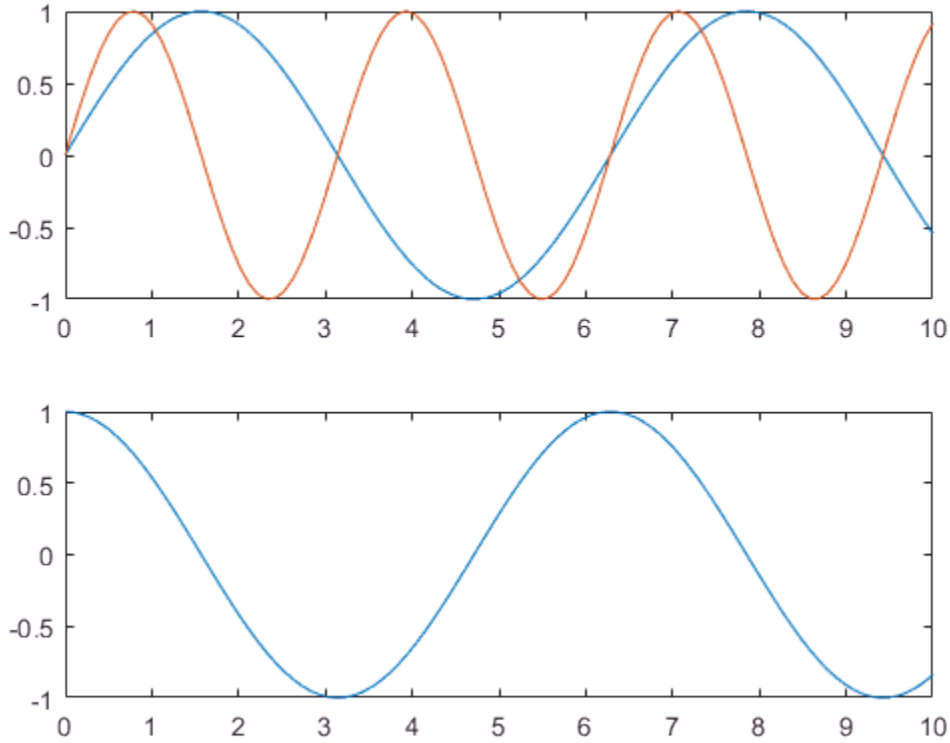

- "Combine Multiple Plots"

Input Arguments

ax — Target axes

`Axes` object | `PolarAxes` object

Target axes, specified as an `Axes` object or a `PolarAxes` object. If you do not specify the axes, then `hold` sets the hold state for the current axes.

Tips

- Use the `ishold` function to test the hold state.

Algorithms

The `hold` function sets the NextPlot property of the `Axes` or `PolarAxes` object to either `'add'` or `'replace'`.

See Also

See Also

Functions
`axes` | `cla` | `figure` | `ishold` | `newplot` | `subplot`

Properties
Axes Properties | PolarAxes Properties

Topics
"Combine Multiple Plots"

Introduced before R2006a

home

Send cursor home

Syntax

```
home
```

Description

`home` moves the cursor to the upper-left corner of the window. When using the MATLAB desktop, `home` also scrolls the visible text in the window up and out of view. You can use the scroll bar to see what was previously on the screen.

Examples

Execute a MATLAB command that displays something in the Command Window and then run the `home` function. `home` moves the cursor to the upper-left corner of the screen and clears the screen.

```
magic(5)

ans =

    17    24     1     8    15
    23     5     7    14    16
     4     6    13    20    22
    10    12    19    21     3
    11    18    25     2     9

home
```

See Also

`clc`

Introduced before R2006a

horzcat

Concatenate arrays horizontally

Syntax

```
C = horzcat(A1,...,AN)
```

Description

`C = horzcat(A1,...,AN)` horizontally concatenates arrays `A1,...,AN`. All arrays in the argument list must have the same number of rows.

- If the inputs are multidimensional arrays, `horzcat` concatenates along the second dimension. The first and remaining dimensions must match.
- If the inputs are tables, `horzcat` concatenates by matching row names when present, or by matching position for tables that do not have row names. All the table inputs must have unique variable names and the row names for all tables that have them must be identical, except for order.

  `horzcat` assigns values for the `Description` and `UserData` properties in `C` using the first nonempty value for the corresponding property in the tables `A1,...,AN`.

  If the inputs are timetables, the row times must be the same and all columns must have different names.

MATLAB calls `C = horzcat(A1, A2,...)` for the syntax `C = [A1 A2 ...]` when any of the inputs are an object.

Tips

You can concatenate categorical arrays with cell arrays of character vectors. For more information, see “Combine Categorical Arrays”.

If all the input arrays are ordinal categorical arrays, they must have the same sets of categories including their order. For more information, see “Ordinal Categorical Arrays”.

You can concatenate datetime arrays with cell arrays of character vectors.

You can concatenate duration arrays and calendar duration arrays. The result is a calendar duration array.

You can concatenate duration or calendar duration arrays with numeric arrays. Prior to concatenation, MATLAB converts the numeric array to an array of equivalent days using the `days` function.

You can concatenate string arrays with numeric arrays, logical arrays, character vectors, or cell arrays. The non-string arrays are first converted to a string array, and the output is returned as a string array.

For information on combining unlike integer types, integers with nonintegers, or cell arrays with non-cell arrays, see "Valid Combinations of Unlike Classes".

Examples

Horizontally Concatenate Two Matrices

Create a 3-by-5 matrix, `A`.

```
A = magic(5);
A(4:5,:) = []
```

```
A =

    17    24     1     8    15
    23     5     7    14    16
     4     6    13    20    22
```

Create a 3-by-3 matrix, `B`.

```
B = magic(3)*100
```

```
B =

   800   100   600
   300   500   700
   400   900   200
```

Horizontally concatenate A and B.

```
C = horzcat(A,B)
```

```
C =

    17    24     1     8    15   800   100   600
    23     5     7    14    16   300   500   700
     4     6    13    20    22   400   900   200
```

Horizontally Concatenate Two Tables

Create a table, A, with three rows and two variables.

```
A = table([5;6;5],['M';'M';'M'],...
    'VariableNames',{'Age' 'Gender'},...
    'RowNames',{'Thomas' 'Gordon' 'Percy'})
```

```
A = 3×2 table
              Age    Gender
              ___    ______

    Thomas    5      M
    Gordon    6      M
    Percy     5      M
```

Create a table, B, with three rows and three variables.

```
B = table([45;41;40],[45;32;34],{'NY';'CA';'MA'},...
    'VariableNames',{'Height' 'Weight' 'Birthplace'},...
    'RowNames',{'Percy' 'Gordon' 'Thomas'})
```

```
B = 3×3 table
              Height    Weight    Birthplace
              ______    ______    __________

    Percy     45        45        'NY'
    Gordon    41        32        'CA'
    Thomas    40        34        'MA'
```

Horizontally concatenate A and B.

```
C = horzcat(A,B)
```

```
C = 3×5 table
              Age    Gender    Height    Weight    Birthplace
              ___    ______    ______    ______    __________

    Thomas    5      M         40        34        'MA'
    Gordon    6      M         41        32        'CA'
    Percy     5      M         45        45        'NY'
```

The order of rows in `C` matches the order in `A`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

`vertcat` | `cat` | `strcat` | `char`

Topics

“Concatenation Methods”

Introduced before R2006a

horzcat (tscollection)

Horizontal concatenation for `tscollection` objects

Syntax

```
tsc = horzcat(tsc1,tsc2,...)
```

Description

`tsc = horzcat(tsc1,tsc2,...)` performs horizontal concatenation for `tscollection` objects:

```
tsc = [tsc1 tsc2 ...]
```

This operation combines multiple `tscollection` objects, which must have the same time vectors, into one `tscollection` containing `timeseries` objects from all concatenated collections.

See Also

`tscollection` | `vertcat (tscollection)`

Introduced before R2006a

hour

Hour number

Syntax

```
h = hour(t)
```

Description

`h = hour(t)` returns the hour numbers of the datetime values in `t`. The `h` output is a `double` array the same size as `t` and contains integer values from 0 to 23.

The `hour` function returns the hour numbers of datetime values. To assign hour values to a datetime array, `t`, use `t.Hour` and modify the Hour property.

Examples

Find Hour Number of Datetime Values

```
t = datetime('today'):hours(8):datetime('tomorrow');
t.Format = 'MMM dd, HH:mm'
```

```
t = 1×4 datetime array
   Feb 24, 00:00   Feb 24, 08:00   Feb 24, 16:00   Feb 25, 00:00
```

```
h = hour(t)
```

```
h =

     0     8    16     0
```

Input Arguments

`t` — Input date and time
`datetime` array

Input date and time, specified as a `datetime` array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`hms` | `minute` | `second` | `timeofday`

Introduced in R2014b

hours

Duration in hours

Syntax

```
H = hours(X)
```

Description

`H = hours(X)` returns an array of hours equivalent to the values in `X`.

- If `X` is a numeric array, then `H` is a `duration` array in units of hours.
- If `X` is a `duration` array, then `H` is a `double` array with each element equal to the number of hours in the corresponding element of `X`.

The `hours` function converts between `duration` and `double` values. To display a duration in units of hours, set its `Format` property to `'h'`.

Examples

Create Duration Array of Hours

```
X = magic(4);
H = hours(X)
```

```
H = 4×4 duration array
   16 hr    2 hr    3 hr   13 hr
    5 hr   11 hr   10 hr    8 hr
    9 hr    7 hr    6 hr   12 hr
    4 hr   14 hr   15 hr    1 hr
```

Convert Durations to Numeric Array of Hours

Create a `duration` array.

```
X = hours(2:10:38) + minutes(30)
```

```
X = 1×4 duration array
    2.5 hr   12.5 hr   22.5 hr   32.5 hr
```

Convert each duration in X to a number of hours.

```
H = hours(X)
```

```
H =

    2.5000   12.5000   22.5000   32.5000
```

View the data type of H

```
whos H
```

```
  Name      Size            Bytes  Class     Attributes

  H         1x4                32  double
```

Input Arguments

X — Input array
numeric array | duration array | logical array

Input array, specified as a numeric array, duration array, or logical array.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`duration`

Topics

"Set Date and Time Display Format"

Introduced in R2014b

hot

Hot colormap array

Syntax

```
c = hot
c = hot(m)
```

Description

`c = hot` returns the hot colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = hot(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the hot colormap.

```
surf(peaks);
colormap('hot');
```

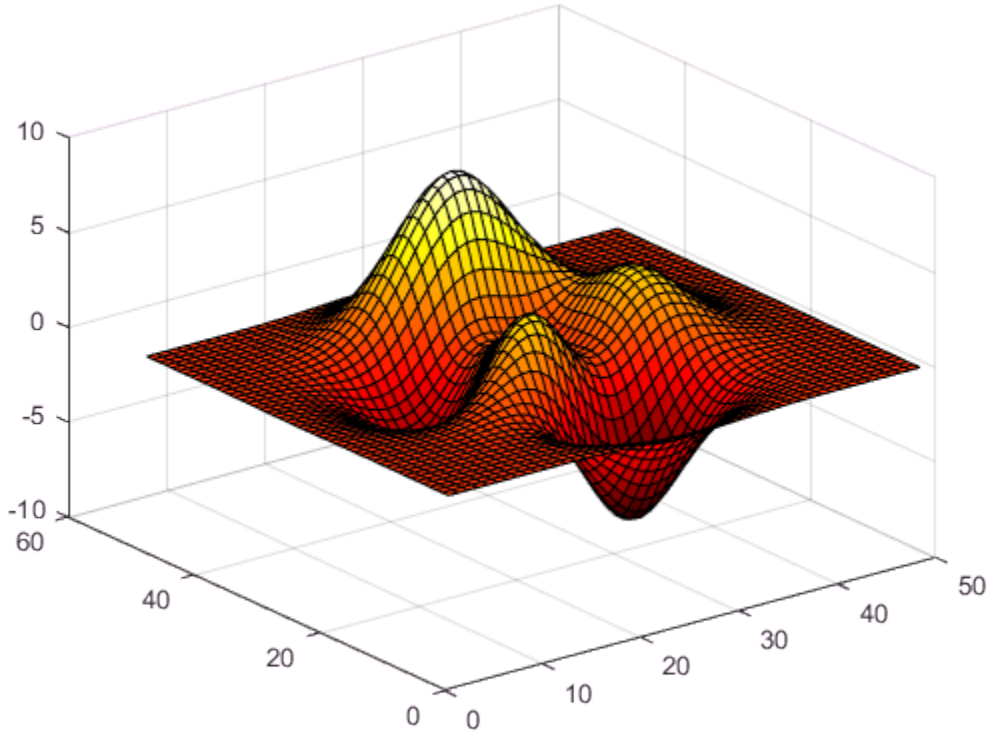

Get the hot colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = hot;
c = flipud(c);
colormap(c);
```

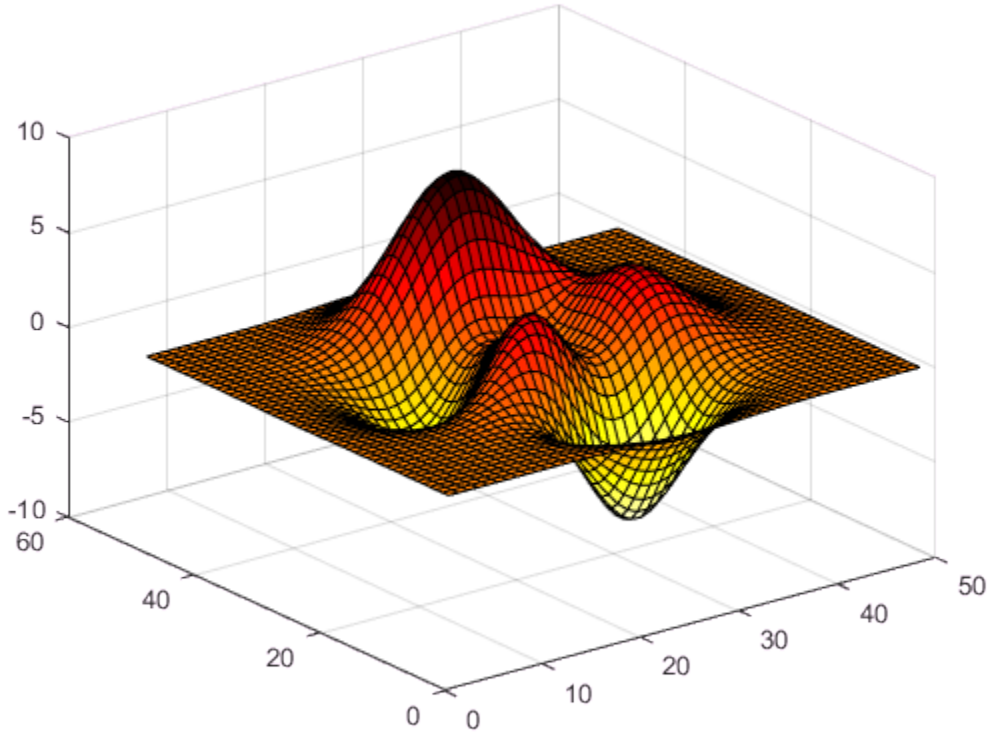

Downsample the Hot Colormap

Get a downsampled version of the hot colormap containing only twenty colors. Then display the contours of the peaks function by applying the colormap and interpolated shading.

```
c = hot(20);
surf(peaks);
colormap(c);
shading interp;
```

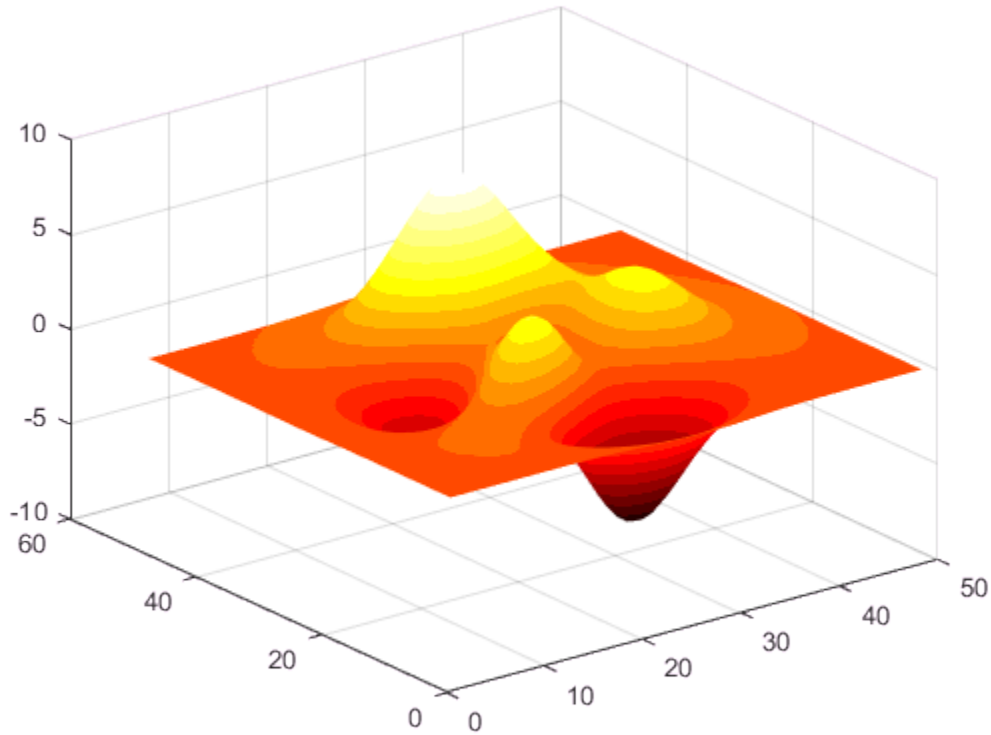

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

hsv

HSV colormap array

Syntax

```
c = hsv
c = hsv(m)
```

Description

`c = hsv` returns the hsv colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.



`c = hsv(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the hsv colormap.

```
surf(peaks);
colormap('hsv');
```

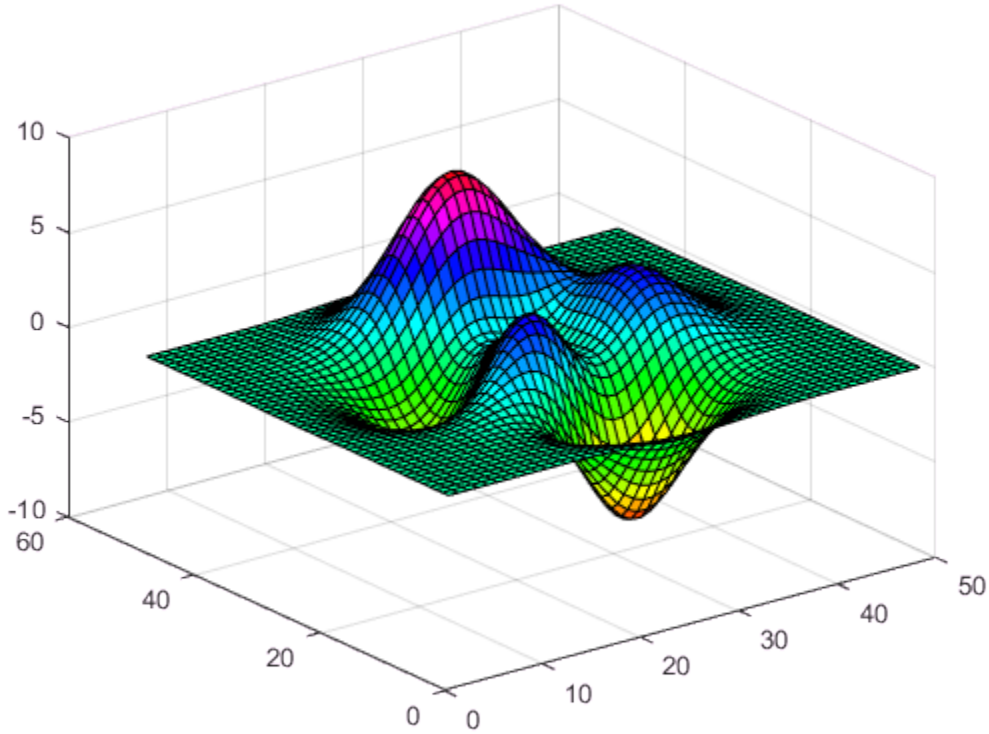

Get the hsv colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = hsv;
c = flipud(c);
colormap(c);
```

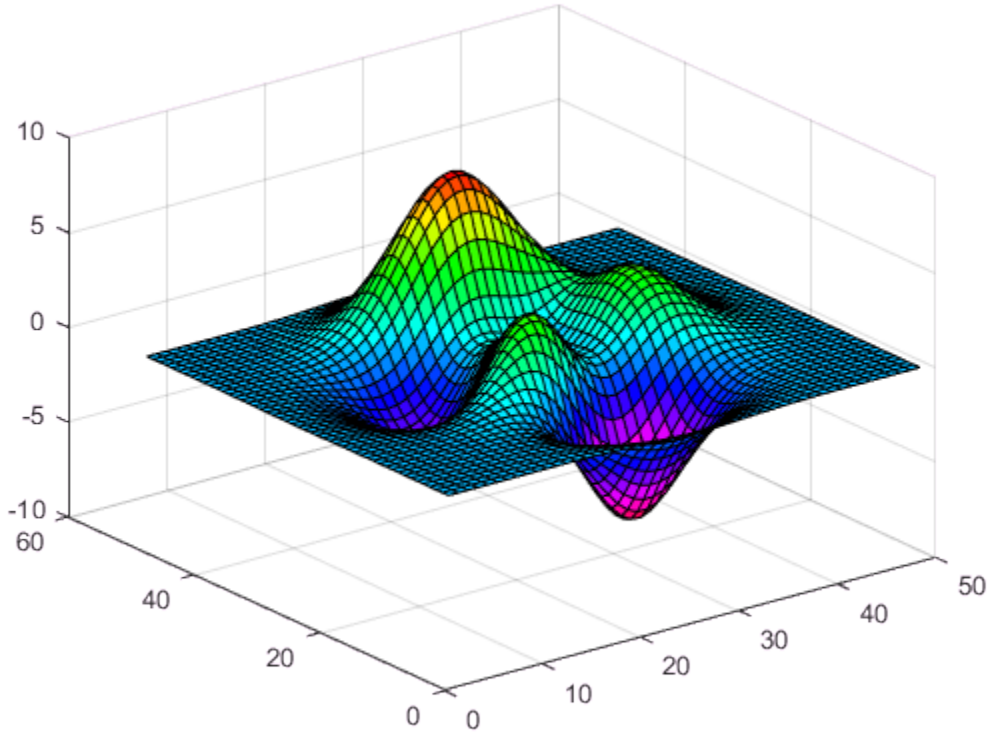

Downsample the hsv Colormap

Get a downsampled version of the hsv colormap containing only ten colors. Then display the contours of the peaks function by applying the colormap and interpolated shading.

```
c = hsv(10);
surf(peaks);
colormap(c);
shading interp;
```

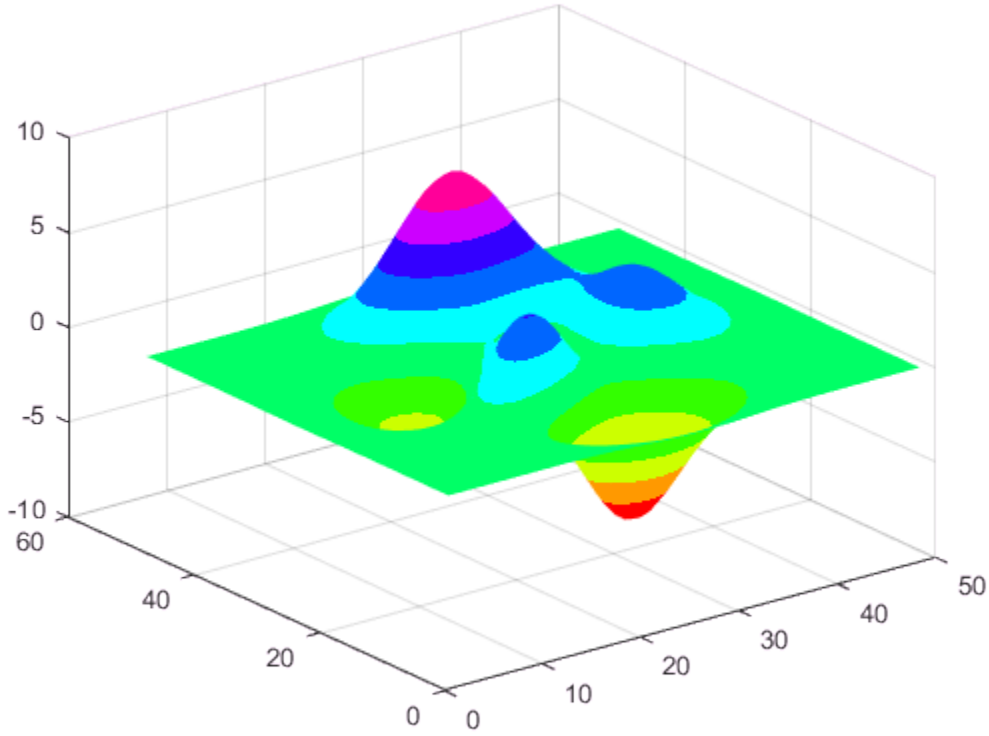

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

hsv2rgb

Convert HSV colormap to RGB colormap

Syntax

```
M = hsv2rgb(H)
rgb_image = hsv2rgb(hsv_image)
```

Description

`M = hsv2rgb(H)` converts a hue-saturation-value (HSV) colormap to a red-green-blue (RGB) colormap. `H` is an m-by-3 matrix, where m is the number of colors in the colormap. The columns of `H` represent hue, saturation, and value, respectively. `M` is an m-by-3 matrix. Its columns are intensities of red, green, and blue, respectively.

`rgb_image = hsv2rgb(hsv_image)` converts the HSV image to the equivalent RGB image. HSV is an m-by-n-by-3 image array whose three planes contain the hue, saturation, and value components for the image. RGB is returned as an m-by-n-by-3 image array whose three planes contain the red, green, and blue components for the image.

Tips

As `H(:,1)` varies from 0 to 1, the resulting color varies from red through yellow, green, cyan, blue, and magenta, and returns to red. When `H(:,2)` is 0, the colors are unsaturated (i.e., shades of gray). When `H(:,2)` is 1, the colors are fully saturated (i.e., they contain no white component). As `H(:,3)` varies from 0 to 1, the brightness increases.

The MATLAB `hsv` colormap uses `hsv2rgb([huesaturationvalue])` where `hue` is a linear ramp from 0 to 1, and `saturation` and `value` are all 1's.

See Also

`brighten` | `colormap` | `rgb2hsv`

Introduced before R2006a

matlab.net.http

Summary of packages and classes in MATLAB HTTP interface

Description

The `matlab.net.http` package consists of the following classes and packages:

matlab.net.http.AuthenticationScheme	HTTP Authentication scheme
matlab.net.http.AuthInfo	Authentication or authorization information in HTTP messages
matlab.net.http.Cookie	HTTP cookie received from server
matlab.net.http.CookieInfo	HTTP cookie information
matlab.net.http.Credentials	Credentials for authenticating HTTP requests
matlab.net.http.Disposition	Results in HTTP log record
matlab.net.http.HeaderField	Header field of HTTP message
matlab.net.http.HTTPException	Exception thrown by HTTP services
matlab.net.http.HTTPOptions	Options controlling HTTP message exchange
matlab.net.http.LogRecord	HTTP history log record
matlab.net.http.MediaType	Internet media type used in HTTP headers
matlab.net.http.Message	HTTP request or response message
matlab.net.http.MessageBody	Body of HTTP message
matlab.net.http.MessageType	HTTP message type
matlab.net.http.ProgressMonitor	Progress monitor for HTTP message exchange
matlab.net.http.ProtocolVersion	HTTP protocol version
matlab.net.http.RequestLine	First line of HTTP request message

matlab.net.http.RequestMessage	HTTP request message
matlab.net.http.RequestMethod	HTTP request method
matlab.net.http.ResponseMessage	HTTP response message
matlab.net.http.StartLine	First line of HTTP message
matlab.net.http.StatusClass	Status class of HTTP response
matlab.net.http.StatusCode	Status code in HTTP response
matlab.net.http.StatusLine	First line of HTTP response message
matlab.net.http.field	Summary of header field classes in MATLAB HTTP interface

See Also

See Also

matlab.net.URI | matlab.net.ArrayFormat | matlab.net.QueryParameter

Introduced in R2016b

matlab.net.http.AuthenticationScheme class

Package: matlab.net.http

HTTP Authentication scheme

Description

The `AuthenticationScheme` enumeration class provides identifiers for supported authentication schemes.

Numeric Representation	Enumeration Member Name	Description
`0`	`Basic`	User name and password are transmitted in the header of an HTTP message. This scheme is implemented automatically when you supply the appropriate `Credentials` property in an `HTTPOptions` object when sending a message, and the server requests `Basic` authentication.
`1`	`Digest`	User is authenticated with a name and password, but more secure because the password is not transmitted over the connection. This scheme is implemented automatically when you supply the appropriate `Credentials` property in an `HTTPOptions` object when sending a message, and the server requests `Digest` authentication.
`-2`	`Bearer`	Based on `OAuth`. MATLAB does not support this scheme.
`-3`	`HOBA`	Not support by MATLAB.
`-4`	`Negotiate`	Not support by MATLAB.
`-5`	`OAuth`	Not support by MATLAB.

Methods

These methods implement the equivalent MATLAB functionality for this class.

`char`	Authentication scheme as character vector
`string`	Authentication scheme as string

See Also

See Also

matlab.net.http.Credentials | matlab.net.http.HTTPOptions | matlab.net.http.AuthInfo | matlab.net.http.ResponseMessage | matlab.net.http.field.AuthenticateField | matlab.net.http.field.AuthorizationField

External Websites

RFC 2617 — HTTP Authentication: Basic and Digest Access Authentication

Introduced in R2016b

matlab.net.http.AuthInfo class

Package: matlab.net.http

Authentication or authorization information in HTTP messages

Description

MATLAB automatically handles authentication in request messages when you provide credentials in an `HTTPOptions` object. Use the `AuthInfo` class to examine authentication, to specify authorization information, or to implement an authentication protocol not supported by the MATLAB HTTP interface.

The `AuthInfo` class represents one authentication challenge returned when:

- You call the `AuthenticateField.convert` method for a response message.
- You insert credentials in an `AuthorizationField` header field into a request message. When you store an `AuthInfo` object in an Authorization field, MATLAB automatically encloses values in quotes where required, and inserts escape characters as needed.
- A server returns `auth-info` data in an `AuthenticationInfoField` header field.

The `AuthenticateField` and `AuthorizationField` `convert` methods convert each `name=value` pair attribute in the field to parameter name-and-value pairs in the `Parameters` property. Escape characters and any quotes surrounding values are removed.

For more information, see RFC 7235 Authentication and RFC 2617 Host-Imp Interface (for Basic and Digest authentication).

Construction

`obj = matlab.net.http.AuthInfo(Scheme,paramName,paramValue)` creates an `AuthInfo` object that includes the `Scheme` and optional `paramName`,`paramValue` parameters. You can specify several argument pairs in any order as `paramName1,paramValue1,...,paramNameN,paramValueN`.

`obj = matlab.net.http.AuthInfo(paramName,paramValue)` creates an `AuthInfo` object with an empty `Scheme` value.

`obj = matlab.net.http.AuthInfo(pStruct)` copies parameters and values from the fields of `pStruct`.

`obj = matlab.net.http.AuthInfo(pStr)` creates an `AuthInfo` from `pStr`.

Input Arguments

`paramName` — Parameter name

string | character vector

Parameter name, specified as a string or character vector. The web service defines `paramName,paramValue` pairs that it accepts as part of a request. A `paramName` argument represents parameters that are converted to `name=value` parameters when you convert an `AuthInfo` object to a string.

Data Types: `char` | `string`

`paramValue` — Parameter value

type required by `paramName`

Parameter value, specified as a type required by `paramName`. There is no constraint on `paramValue` types, but values must support a `string` or `char` method.

`pStruct` — Parameters and values

MATLAB structure

Parameters and values, specified as fields in a MATLAB structure. The structure should have at least a `Scheme` field. Fields with empty values are omitted.

Data Types: `struct`

`pStr` — Parameters and values

string

Parameters and values, specified as strings. For `pStr` syntax:

- If `pStr` is a credential or challenge, see RFC 7235, section 2.1.
- If `pStr` is an `auth-info` in an Authentification-Info header, see RFC 2617, Section 3.2.3.

`pStr` is one of the following formats. The values are optionally enclosed in quotes and escape characters are inserted as needed.

```
SCHEME token
SCHEME param1=value1, param2=value2, ...
param1=value1, param2=value2, ...
```

Data Types: `string`

Properties

`Scheme` — Authentication scheme

`AuthenticationScheme.Basic` (default) | `matlab.net.http.AuthenticationScheme` object | string | empty

Authentication scheme, specified as a `matlab.net.http.AuthenticationScheme` object or a string naming the scheme.

- If `Scheme` is a string, then MATLAB attempts to convert it to an `AuthenticationScheme` enumeration.
- If the `AuthInfo` object is a challenge in an `AuthenticateField` header field and `Scheme` is not an `AuthenticationScheme` enumeration, then `Scheme` is a string. Otherwise, `Scheme` is a `AuthenticationScheme` object.
- If `AuthInfo` is used in an `AuthorizationField` header field, then `Scheme` is an `AuthenticationScheme` object.
- If `AuthInfo` is from an `AuthenticationInfoField` header field, then `Scheme` might be empty.

`Parameters` — Parameter names and values

n-by-2 cell array

Parameter names and values, specified as an n-by-2 cell array. `Parameters{i,1}` is the name of the `i`th parameter and is a string. `Parameters{i,2}` is its value. The type depends on the parameter. To get or set this property, use the `getParameter` or `setParameter` methods.

The `Parameters` property depends on the `Scheme` property and the attributes that follow `Scheme` in the header field. Parameter name matching is case-insensitive. Use the `addParameter`, `setParameter`, and `removeParameter` methods to access the values in the `Parameters` array.

Some parameter properties have special meanings and syntax, which MATLAB enforces based on the `Scheme`. Parameters with special meanings are listed here. All other parameters are `string` objects.

- If `Scheme` is `AuthenticationScheme.Basic`, then one parameter is expected.
  - In an `AuthenticateField` (a challenge from a server), the property name is `realm`. The server provides the realm for a user prompt, which is matched with the `Credentials.Realm` property. An `AuthInfo` returned by the `AuthenticateField.convert` method always has a realm property.
  - In an `AuthorizationField` (the credentials in a response from a client), the property name is `encoded`. The `Encoded` property is a base64-encoded sequence of characters representing the user name and password as it appears in the header field following `Scheme`. If you set this parameter, then you must encode it yourself using the `base64encode` function.
- If `Scheme` is `AuthenticationScheme.Digest`, then the number of properties is variable and corresponds to `name=value` attributes in the header field.
  - For an `AuthenticateField`, see properties listed in RFC 2617, section-3.2.1.
  - For an `AuthorizationField`, see properties listed in RFC 2617, section-3.2.2.
- If `Scheme` is any other `AuthenticationScheme` property or a string, then all attribute names and values are acceptable, as long as they can be converted to strings.

Attributes:

`Dependent`	`true`

Methods

getParameter	Return value of AuthInfo parameter
removeParameter	Remove AuthInfo parameter
setParameter	Set value of AuthInfo parameter

These methods implement the equivalent MATLAB functionality for this class.

`eq` and `isequal`	Two `AuthInfo` objects are equal if: • They have the same `Scheme` property and parameter names. Parameter name matching is case-insensitive. • The parameter values are equal using `isequal`, regardless of the order of the parameters. Both values must be scalars.
`char`	AuthInfo as character vector
`string`	AuthInfo as string

Attributes

`Sealed`	`true`

See Also

See Also

matlab.net.http.AuthenticationScheme | matlab.net.http.StatusCode | matlab.net.URI | matlab.net.http.field.AuthorizationField | matlab.net.http.field.AuthenticateField | matlab.net.http.field.AuthenticationInfoField | `matlab.net.base64encode`

Topics

Class Attributes
Property Attributes

External Websites

RFC 7235 Authentication
RFC 2617 Host-Imp Interface

Introduced in R2016b

getParameter

Class: matlab.net.http.AuthInfo
Package: matlab.net.http

Return value of AuthInfo parameter

Syntax

```
value = getParameter(authinfo,name)
```

Description

`value = getParameter(authinfo,name)` returns the value of parameter `name`. If the parameter does not exist, then `getParameter` returns empty (`[]`).

Input Arguments

`authinfo` — AuthInfo
`matlab.net.http.AuthInfo` object

AuthInfo, specified as a `matlab.net.http.AuthInfo` object.

`name` — Parameter name
string | character vector

Parameter name, specified as a string or character vector. Name matching is case-insensitive.

See Also

Introduced in R2016b

removeParameter

Class: matlab.net.http.AuthInfo
Package: matlab.net.http

Remove AuthInfo parameter

Syntax

```
newinfo = removeParameter(authinfo,name)
```

Description

`newinfo = removeParameter(authinfo,name)` removes the named parameter and returns the modified `AuthInfo` object. If the parameter does not exist, then `removeParameter` does nothing.

Input Arguments

`authinfo` — AuthInfo
`matlab.net.http.AuthInfo` object

AuthInfo, specified as a `matlab.net.http.AuthInfo` object.

`name` — Parameter
string | character vector

Parameter, specified as a string or character vector. Name matching is case-insensitive.

See Also

Introduced in R2016b

setParameter

Class: matlab.net.http.AuthInfo
Package: matlab.net.http

Set value of AuthInfo parameter

Syntax

```
newinfo = setParameter(authinfo,name,value)
```

Description

`newinfo = setParameter(authinfo,name,value)` sets the `value` of the parameter `name` and returns the modified `AuthInfo` object. If a parameter does not exist, then the method adds it.

If you use this method to set the value of the `Scheme` property, the method changes the value of the property instead of adding a `Scheme` parameter. To set the `Scheme`, type `obj.Scheme = value`.

If you have a parameter named `Encoded`, then it must be the only parameter in this object. This usage is for an `AuthorizationField` object only.

Input Arguments

`authinfo` — AuthInfo
`matlab.net.http.AuthInfo` object

AuthInfo, specified as a `matlab.net.http.AuthInfo` object.

`name` — Parameter name
string | character vector

Parameter name, specified as a string or character vector.

Name matching is not case-sensitive, but `value` is case-sensitive. If `name` matches an existing parameter, but with a different case, then the parameter name is changed to the case of the specified `name`.

`value` — Parameter value
string | character vector | any type that has string or char method | type supported by `name`

Parameter value, specified a string, character vector, any type that has a string or char method, or a type supported by the `name`.

Do not enclose a value with double-quotes or insert any escape characters. When you insert this `AuthInfo` object in an `AuthenticateField`, `AuthenticationInfoField` or `AuthorizationField` object, then the value is converted to a string and quotes and escape characters are automatically inserted as needed. If `value` is an array of strings or a cell array of character vectors, then its members are separated by spaces.

Output Arguments

`newinfo` — Updated parameter value
type specified by parameter

Updated parameter value, returned as any type that was set for the parameter. If `value` is `[]`, then `setParameter` does not change the value of the `name` property. However, if `value` is an empty character vector or string, then the method sets VALUE to an empty string.

See Also

See Also
matlab.net.http.field.AuthenticateField | matlab.net.http.field.AuthenticationInfoField | matlab.net.http.field.AuthorizationField

Introduced in R2016b

matlab.net.http.Cookie class

Package: matlab.net.http

HTTP cookie received from server

Description

The `Cookie` class represents an HTTP cookie. You obtain a `Cookie` object from a `SetCookieField` header in a `ResponseMessage` object. Then you send it back to the server in a `RequestMessage` `CookieField` header.

Construction

`obj = matlab.net.http.Cookie(name,value)` creates a `Cookie` object with the specified `name` and `value` properties. Use this constructor for testing.

Properties

`Name` — Cookie name (read-only)

string

Cookie name, specified as a string.

Example: `"SESSIONID"`

Attributes:

`GetAccess`	`public`
`SetAccess`	`private`

`Value` — Cookie value (read-only)

string

Cookie value, specified as a string. The value only has meaning to the server that sent the cookie.

Example: "688412d8ed15f4a736dc6ab3"

Attributes:

GetAccess	public
SetAccess	private

Methods

These methods implement the equivalent MATLAB functionality for this class.

char	Cookie as character vector
string	Cookie as string

Attributes

Sealed	true

Examples

Test for Expected Cookie Value

This example assumes a server returns specific values in the variable `response`. You cannot run this code in MATLAB. You can, however, use these coding patterns to test values from your web service responses.

Create a cookie object `test` containing values you expect from a server.

```
test = matlab.net.http.Cookie('cookie1','ID:33445566')
```

```
test = 

  Cookie with properties:

     Name: "cookie1"
    Value: "ID:33445566"
```

Send a message to a server; this step is not shown in the example. Assume that the server responds to your request message with the following information in the `response` message.

```
setCookieFields = response.getFields('Set-Cookie')
```

```
setCookieFields 
  SetCookieField with properties:

     Name: "Set-Cookie"
    Value: "cookie1=ID:33445566; Path=/"
```

Extract the cookie information.

```
cookieInfos = setCookieFields.convert;
```

Compare the cookie with your test cookie.

```
string(cookieInfos.Cookie) == string(test)
```

```
ans =

   1
```

The cookies match.

See Also

See Also

matlab.net.http.RequestMessage | matlab.net.http.ResponseMessage | matlab.net.http.field.SetCookieField | matlab.net.http.field.CookieField

Topics

"Manage Cookies"
Class Attributes
Property Attributes

External Websites

RFC 6265 HTTP State Management Mechanism

Introduced in R2016b

matlab.net.http.CookieInfo class

Package: matlab.net.http

HTTP cookie information

Description

The `CookieInfo` class contains a `Cookie` object and information about the cookie that you can use for cookie management. To obtain a `CookieInfo` object, call the `convert` method of a `SetCookieField` object in a response message.

Unlike browsers, MATLAB does not provide an automatic cookie store. You must save cookies on your own and send them back to servers as needed.

Construction

`obj = matlab.net.http.CookieInfo(Name,Value)` creates a `CookieInfo` object with additional properties specified by one, or more name-value pair arguments. `Name` is the property name and `Value` is the corresponding value. You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`. Unspecified properties are set to their default values.

Use this constructor for testing.

Properties

`Cookie` — Cookie

`matlab.net.http.Cookie` object

Cookie, specified as a `matlab.net.http.Cookie` object. Insert the Cookie into a request message `CookieField` property.

`Expires` — Cookie expiration time

`datetime` | NaT

Cookie expiration time, specified as a `datetime` object. If there is an `Expires` attribute in the header field, then the `Expires` property is set. If the `Expires` attribute cannot be parsed, then `Expires` is NaT.

Data Types: `datetime`

`MaxAge` — Duration of cookie

integer | NaN

Duration of cookie, specified as an integer or NaN. If there is a `Max-Age` attribute in the header field, then the `MaxAge` property is set. If the `Max-Age` attribute cannot be parsed, then `MaxAge` is NaN.

`Domain` — Cookie domain

string

Cookie domain, specified as a string. If the Set-Cookie field does not specify a `Domain` attribute, then the `Domain` property is set to the request message `URI.Host` property and `HostOnly` is set to `true`. `Domain` never begins with a period, as described in RFC 6265 — HTTP State Management Mechanism, Section 5.2.3.

`Path` — Path attribute in Set-Cookie field

string

Path attribute in a Set-Cookie field, specified as a string. The `Path` property is the value of the `Path` attribute in the Set-Cookie field. If the field does not contain a path attribute, then the `Path` property is set to `default-path` based on the request message `URI.Path` property. For a description of `default-path`, see RFC 6265 — HTTP State Management Mechanism, Section 5.1.4. Paths and Path-Match. `Path` always begins with a slash (/) character.

`Secure` — `Secure` attribute status

`false` (default) | `true`

`Secure` attribute status, where the `Secure` property is specified as `true` or `false`. The `Secure` property indicates that the Set-Cookie field contains a `Secure` attribute.

Data Types: `logical`

`HttpOnly` — `HttpOnly` attribute status

`false` (default) | `true`

`HttpOnly` attribute status, where the `HttpOnly` property is specified as `true` or `false`. The `HttpOnly` property indicates that the Set-Cookie field contains an `HttpOnly` attribute.

Data Types: `logical`

`Extensions` — Values of `extension-av` attributes
string

Values of `extension-av` attributes, specified as a string. The entire attribute is a single string, even if its syntax is of the form `name=value`.

Data Types: `string`

`HostOnly` — `Domain` attribute status
`true` (default) | `false`

`Domain` attribute status, where the `HostOnly` property is specified as `true` or `false`. If the Set-Cookie field contains a `Domain` attribute, then `HostOnly` is true.

Data Types: `logical`

`ExpirationTime` — Cookie expiration
`datetime`

Cookie expiration, specified as a `datetime` object.

- If the Set-Cookie field contains either an `Expires` or a `Max-Age` attribute, then `ExpirationTime` is set to the attribute.
- If neither attribute appears, then `ExpirationTime` is set to `datetime('Inf')` and the cookie is retained until the current session is over.

Data Types: `datetime`

`CreationTime` — Time cookie was created
`datetime`

Time the cookie was created, specified as a `datetime` object. The `SetCookieField.convert` method sets `CreationTime` to the current time.

If a new `CookieInfo` object matches an existing one, then the new object replaces the old one. However, the `CreationTime` property does not change. This behavior is specified in RFC 6265 — HTTP State Management Mechanism, Section 5.3

Storage Model, step 11.3. The `CookieInfo` objects match when the `Cookie.Name`, `CookieInfo.Domain`, and `CookieInfo.Path` (if specified) properties are equal.

Data Types: `datetime`

Methods

collectFromLog	Latest CookieInfo objects from HTTP response message history

These methods implement the equivalent MATLAB functionality for this class.

`char`	Cookie info as character vector
`string`	Cookie info as string

Attributes

`Sealed`	`true`

See Also

See Also

matlab.net.http.field.SetCookieField | `datetime` | `duration`

Topics

Class Attributes

External Websites

RFC 6265 — HTTP State Management Mechanism, Section 5.3 Storage Model
RFC 6265 — HTTP State Management Mechanism, Section 5.2.3. The Domain Attribute
RFC 6265 — HTTP State Management Mechanism, Section 5.1.4 Default Base URI

Introduced in R2016b

matlab.net.http.CookieInfo.collectFromLog

Class: matlab.net.http.CookieInfo
Package: matlab.net.http

Latest CookieInfo objects from HTTP response message history

Syntax

```
infos = matlab.net.http.CookieInfo.collectFromLog(history)
```

Description

`infos = matlab.net.http.CookieInfo.collectFromLog(history)` returns `CookieInfo` objects for all the valid cookies found in the Set-Cookie header fields of the response message history. Use `collectFromLog` to obtain the latest cookies from a history of messages, such as those exchanged during a transaction involving authentication or redirection. If a server sends multiple versions of the same cookie, then `collectFromLog` returns only the most recent. This method also eliminates cookies that might not be valid for the URI of the server, that is, whose Domain is inconsistent with the request URI.

Input Arguments

`history` — Log records
vector of `matlab.net.http.LogRecord` objects

Log records, specified as a vector of `matlab.net.http.LogRecord` objects. The `RequestMessage.send` method returns a `LogRecord` as an optional argument.

Attributes

Sealed	true
Static	true

Examples

Reduce Message Exchanges

Eliminate message redirection by reusing cookies.

Send a message to `mathworks.com`. Multiple messages are exchanged.

```
import matlab.net.http.*
import matlab.net.http.field.*
r = RequestMessage;
[resp,~,history] = r.send('http://www.mathworks.com');
disp(length(history))
```

```
     4
```

Extract the cookies from the message history.

```
cookieInfos = CookieInfo.collectFromLog(history);
if ~isempty(cookieInfos)
    cookies = [cookieInfos.Cookie];
end
```

Apply the cookies to the next request. Only one message is exchanged.

```
r = RequestMessage([],CookieField(cookies));
[resp,~,history] = r.send('http://www.mathworks.com');
disp(length(history))
```

```
     1
```

See Also

See Also

matlab.net.http.field.CookieField | matlab.net.http.LogRecord | matlab.net.http.ResponseMessage | matlab.net.http.RequestMessage.send

Introduced in R2016b

matlab.net.http.Credentials class

Package: matlab.net.http
Superclasses: handle

Credentials for authenticating HTTP requests

Description

The `Credentials` class specifies authentication credentials for sending a request message. Specify a `Credentials` object in an `HTTPOptions` object.

The `RequestMessage.send` method uses credentials to respond to authentication challenges from servers or proxies. The authentication challenge is in an `AuthenticateField` header field and specifies one or more authentication schemes that the server or proxy accepts to satisfy the request.

The behavior depends on the authentication scheme. In general, MATLAB searches the vector of `Credentials` objects for one that applies to the request URI and which supports the specified authentication scheme. MATLAB then resends the original request with the appropriate credentials in an `AuthorizationField` header. If multiple credentials apply, then MATLAB uses the most specific `Credentials` object for the strongest scheme. If duplicate `Credentials` objects exist, then MATLAB uses the first one.

MATLAB only implements the `Basic` and `Digest` authentication schemes. If the server requires other schemes, or you do not supply credentials for the required scheme, then the authentication response message returns a `StatusCode` object of 401 or 407. In which case, you must implement the appropriate response yourself.

After a successful authentication, MATLAB saves the information in the `Credentials` object. If you apply these credentials on subsequent requests to the same server, then MATLAB does not wait for an authentication challenge from the server. To apply the credentials, provide the same `Credentials` object for every request.

`Credentials` objects are handle objects and internally accumulate information about prior successful authentications. Therefore, you can reuse the information for subsequent messages. If you insert this object into multiple `HTTPOptions` objects, then

the `Credentials` object might be updated upon each use. If you copy `Credentials` using its `copy` method, then MATLAB copies only the visible properties that you set, and not the internal state.

Construction

`obj = matlab.net.http.Credentials(Name,Value)` creates HTTP credentials with additional properties specified by one, or more name-value pair arguments. `Name` is the property name and `Value` is the corresponding value. You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`. Unspecified properties are set to their default values.

Properties

`Scheme` — Authentication schemes for credentials

`[AuthenticationScheme.Basic, AuthenticationScheme.Digest]` (default) | vector of `matlab.net.http.AuthenticationScheme` objects | empty

Authentication schemes for credentials, specified as a vector of `matlab.net.http.AuthenticationScheme` objects. The default value is `AuthenticationScheme.Basic` and `AuthenticationScheme.Digest`. If `Scheme` is empty, then the credentials apply to all authentication schemes.

If `Scheme` is set to `Basic` only, then these credentials might be applied to a request whether or not the server requests authentication. A `Basic`-only scheme avoids an extra round trip responding to an authentication challenge. However, if the server does not require `Basic` authentication, this scheme unnecessarily exposes the `Username` and `Password` properties to the server.

If one of the options is `Digest` or if `Scheme` is empty, then the first message to which these credentials potentially apply is sent without an Authorization header field. The message is chosen based on the `Scope` property and the request URI. These `Credentials` are used only after the server responds with a challenge and if the `Scope` and `Realm` properties match the URI and the server challenge.

`Scope` — URIs to which credentials apply

empty (default) | vector of `matlab.net.URI` objects | string | character vector

URIs to which credentials apply, specified as a vector of `matlab.net.URI` objects or strings or character vectors. Strings must be acceptable to the `URI` constructor or of the form `host/path/...`.

An empty `Scope` value, or an empty `Host` or `Path` in this vector matches all `Host` or `Path` properties. Do not leave `Scope` empty if `Scheme` is set to `Basic` only, unless you only access trusted servers. This combination of settings sends `Username` and `Password` to any server you access using the `HTTPOptions` containing these `Credentials`.

MATLAB compares the values in `Scope` with the request message URI to determine if these credentials apply. Credentials apply if the request URI refers to the same host at a path at or deeper than one of the URIs in this `Scope`. A `Scope` containing a URI naming a host with no path applies to all paths on that host.

For example, a `mathworks.com` host name in a `Scope` matches a request to `www.mathworks.com` and `anything.mathworks.com`. A `mathworks.com/products/stateflow` URI matches a request to `www.mathworks.com/products/stateflow/features` but not to `www.mathworks.com/products`. The `/products` path is not at or deeper than `/products/stateflow`.

Only the `Host`, `Port`, and `Path` properties of the `Scope` URIs are used. Typically you only specify a `Host` name, such as `www.mathworks.com`. If you know that the credentials are needed only for some paths within a host, then add a `Path` or a portion of a path.

`Realm` — Authentication realms for credentials

[ ] empty (default) | string array | character vector | cell array of character vectors

Authentication realms for credentials, specified as a string array, character vector, or cell array of character vectors containing regular expressions describing the realms for the credentials. The default value is empty (`[ ]`), which matches all realms. If any value is an empty string, it only matches an empty or unspecified `Realm`. To anchor the regular expression to the start or end of the authentication `Realm` string, include the `^` or `$` characters as appropriate.

A `Realm` contains text to display so that the user knows what name and password to enter. The server specifies the `Realm` in an `AuthenticateField`. Use a `Realm` when a server requires different login values for different URIs and you want to specify programmatically different credentials for different realms on the same server. If you prompt for a name and password, do not set this property. Instead, display the `Realm` property from the `AuthenticateField` in your prompt so that the user knows which credentials to enter.

MATLAB compares the expressions in `Realm` against the authentication `Realm` in `AuthenticateField` to determine if these credentials apply. Once MATLAB carries out a successful authentication using one of these realms, MATLAB caches information about the authentication in `Credentials`. A subsequent request to a host and path that applies to these `Credentials` uses this cached information for authentication. This avoids the overhead of an authentication challenge or a call to the `GetCredentialsFcn` function.

`Username` — User name for `Basic` or `Digest` authentication schemes

string | character vector | [ ]

User name for `Basic` or `Digest` authentication schemes, specified as a string or character vector. If you set the `Username` and `Password` properties to any string (including an empty one), then `Username` is used for authentication to any request for which these credentials apply, unless `GetCredentialsFcn` is specified. If you set this property to `[ ]`, then you must specify `GetCredentialsFcn` or authentication is not attempted.

`Password` — Password for `Basic` or `Digest` authentication schemes

string | character vector | [ ]

Password for `Basic` or `Digest` authentication schemes, specified as a string or character vector. Use the `Password` property to authenticate any request for which these credentials apply, unless the `GetCredentialsFcn` property is specified. If the `Password` value is `[ ]`, then no password is provided.

`GetCredentialsFcn` — Function returning `Username` and `Password`

function handle

Function returning the `Username` and `Password` for authentication, specified as a function handle. MATLAB calls the `GetCredentialsFcn` function to obtain the name and password to use for the authentication response. MATLAB ignores the `Username` or `Password` properties in `Credentials`.

The function signature for `GetCredentialsFcn` is:

```
[username,password] = GetCredentialsFcn(cred,req,resp,authInfo,prevUsername,prevPassw
```

where the arguments are specified as:

- `cred` — Handle to this `Credentials` object
- `req` — Last sent request message that provoked this authentication request.

- `resp` — Response message from the server containing an `AuthenticateField`. If the `cred.Scheme` property is set to only `Basic`, then the `resp` argument might be empty.
- `authInfo` (optional) — One element in the vector of `AuthInfo` objects returned by the `AuthenticateField.convert` method that MATLAB selects to match these credentials. Each object in this array has `Scheme` and `Realm` fields.
- `prevUsername`, `prevPasswd` (optional) — Initially empty arguments. If set, these arguments are the values the `GetCredentialsFcn` function returned in a previous invocation, which the server did not accept. If you are not prompting for credentials, then compare these values to the ones you plan to return. If they are the same, set `username` to `[]` to indicate an authentication failure. If you prompt the user for credentials, then you do not need to specify these arguments.
- `username` — User name to use. If a server requires only a password, not a user name, then set `username` to an empty string (`''`). If the `username` value is `[]`, then the authentication failed.
- `password` — Password to use.

By implementing the `GetCredentialsFcn` function and leaving the `Username` and/or `Password` properties in `Credentials` empty, you can implement a prompt to obtain these values from the user without embedding them in your program. In your prompt, display the request URI or the `authInfo.Realm` property. A convenient pattern is to set the `Username` property and prompt only for the password. Your prompt can display the existing `Username`, or `prevUsername`, if set, and give the user the option to change it.

The `GetCredentialsFcn` function can examine the credentials in the `cred` argument and the header fields in the request and response messages to determine which resource is being accessed. Thus, the function can prompt the user for the correct credentials. In general, the prompt should display `authInfo.Realm` to let the user know the context of the authentication.

Since the `cred` argument is a handle, the `GetCredentialsFcn` function stores the user name and password in the object. You can use that object in future requests without calling the function again. MATLAB saves the name and password internally to apply them to future requests. However, MATLAB might not always be able to determine whether the same user name and password apply to different requests using these credentials.

If authentication is denied, then `GetCredentialsFcn` returns an empty array `[]` (not an empty string `''`) for the user name. MATLAB returns the server authentication failure in the response message. This behavior is appropriate if you implement a user

prompt and the user clicks cancel in the prompt. If `prevUsername` and `prevPasswd` are identical to the name and password that you would return, then when you programmatically supply the name and password, you must return `[]`. This value indicates that your credentials are not accepted and you have no alternative choice. Otherwise, an infinite loop might occur calling your `GetCredentaislFcn` function repeatedly.

Data Types: `function_handle`

Examples

Create Credentials

Create credentials that are sent to only the appropriate server.

```
import matlab.net.http.Credentials
scope = URI('http://my.server.com');
creds = Credentials('Username','John','Password','secret','Scope',scope);
options = HTTPOptions('Credentials',creds);
```

Send the message. If the server requires authentication, then the transaction involves an exchange of several messages.

```
resp = RequestMessage().send(scope,options);
...
```

Next, reuse the options that contain the same credentials. Since the credentials already have been used successfully, this transaction requires a single message.

```
resp = RequestMessage().send(scope,options)
```

Prompt User for Name and Password

Create a function that prompts for credentials, using the `Username` property from the `Credentials` object as a default. MATLAB calls this function to obtain the name and password to use for the authentication response.

Create the `getMyCredentials` function.

```
function [u,p] = getMyCredentials(cred,req,resp,authInfo)
    u = cred.Username;
    prompt{1} = 'Username:';
    prompt{2} = 'Password:';
    defAns = {char(u), ''};
```

```
    title = ['Credentials needed for ' char(getParameter(authInfo,'realm'))];
    answer = inputdlg(prompt, title, [1, 60], defAns, 'on');
    if isempty(answer)
        u = [];
        p = [];
    else
        u = answer{1};
        p = answer{2};
    end
end
```

Create the request message.

```
cred = matlab.net.http.Credentials('GetCredentialsFcn',@getMyCredentials);
options = matlab.net.http.HTTPOptions('Credentials',cred);
req = matlab.net.http.RequestMessage;
```

Send the message to a `httpbin.org`.

```
uri = 'httpbin.org/basic-auth/user/passwd';
resp = req.send(uri,options)
```

Enter any text. To quit, select **Cancel**.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

`Credentials` objects are handle objects and internally accumulate information about prior successful authentications, so that you can reuse the information for subsequent messages. If you insert this object into multiple `HTTPOptions` objects, then `Credentials` might be updated on each use. If you copy `Credentials` using its `copy` method, then MATLAB copies only the visible properties that you set, and not the internal state.

See Also

See Also

matlab.net.http.HTTPOptions | matlab.net.http.RequestMessage | matlab.net.http.StatusCode | matlab.net.http.AuthenticationScheme

Introduced in R2016b

matlab.net.http.Disposition class

Package: matlab.net.http

Results in HTTP log record

Description

The `Disposition` enumeration class provides results in an HTTP log record.

Enumeration Member Name	Description
`ConversionError`	An error occurred sending or receiving the message. The `LogRecord.Exception` property contains the exception that occurred. If the error occurred sending the request, `LogRecord.Request` contains the completed `RequestMessage` object and the `LogRecord.Response` property is empty. If the error occurred receiving the response, `LogRecord.Response` might be empty if complete headers were not received. If headers were received but the payload could not be read, the `ResponseMessage` object contains only the headers.
`Done`	A request and response were successfully sent and received. `Done` indicates the log record contains both the `RequestMessage` and `ResponseMessage`. It does not imply anything about the `StatusCode` in the response.
`TransmissionError`	An error occurred converting the data of the response. The request was received, but there was an error trying to convert the payload of the response. This condition indicates that the `MessageBody.Payload` property of `LogRecord.Response` contains the raw payload and the `Data` property is empty. The `LogRecord.Exception` property contains the exception.

See Also

See Also

matlab.net.http.LogRecord | matlab.net.http.RequestMessage | matlab.net.http.ResponseMessage | matlab.net.http.StatusCode | matlab.net.http.MessageBody

Introduced in R2016b

matlab.net.http.HeaderField class

Package: matlab.net.http

Header field of HTTP message

Description

Use the `HeaderField` class to implement a header field for an HTTP message. The class provides conversions between strings in the header and MATLAB objects, arrays, and structures. Although you can set the `HeaderField` properties to arbitrary values, HTTP header fields have constraints on the allowed characters.

The `Name` property defines the header field type. MATLAB provides subclasses for commonly used fields in the `matlab.net.http.field` package. To see a list of supported subclasses, call the `HeaderField.displaySubclasses` method.

Construction

`obj = matlab.net.http.HeaderField(name,value)` creates a header field with the Name property set to `name` and the Value property set to `value`. Either argument can be an empty double, `[]`. You can specify several argument pairs in any order as `name1,value1,...,nameN,valueN`. If the last `value` argument is missing, `HeaderField` treats it as empty.

Properties

`Name` — Header field name

string | character vector

Header field name, specified as a string or character vector. `Name` determines the type of the field, which determines valid values for the `Value` property. If you set `Name` to `[]` or an empty string, then `Value` is `[]`.

If this object is an instance of a subclass implementing a specific header field type, then that class enforces constraints on the `Name` property.

Example: `'Content-Type'`

`Value` — Header field value

string | any type valid for `Name`

Header field value, specified as a string or any type valid for the `Name` property.

When you read this property, `Value` is a string representing the value in the field.

When you set this property, `Value` is any type acceptable to the field based on the `Name` property and/or the class of this object. The result is converted to a string. If a field type has a default value, set `Value` to an empty string (`''` or `string('')`). If you specify an empty double, `[]`, the request message `send` and `complete` methods do not add this field to the message.

Example: `'text/html'`

Methods

char	Return header fields as formatted character vector
convert	Convert header field value to MATLAB type
convertLike	Convert header field value like another header field
displaySubclasses	Display supported HeaderField subclasses
eq	Compare two HeaderField arrays
isequal	Compare two HeaderField arrays
string	Return header fields as formatted string
parse	Parse header field value and return as strings

Examples

Choose Header Field Constructor

To create a Content-Type header field, use either the `HeaderField` class or the `ContentTypeField` class constructor.

When you use the `HeaderField` class constructor, you specify the `Name` property as `'Content-Type'`. However, if you misspell the field name, you might not find out about the error until the server rejects the message. Some servers silently ignore unknown field names.

```
f1 = matlab.net.http.HeaderField('Content-Type','text/plain');
```

Using the `ContentTypeField` class constructor is preferred because you cannot misspell the field name.

```
f2 = matlab.net.http.field.ContentTypeField('text/plain');
```

If the `Value` properties are the same, then the fields are equal, regardless of which constructor you use.

```
f1 == f2
```

```
ans =    1
```

Find Value in HTTP HeaderField Array

An HTTP response message contains multiple header fields. This example shows how to locate a specific header field, `Cache-Control`, in a response from `mathworks.com`.

Send a message to `mathworks.com`.

```
request = matlab.net.http.RequestMessage;
uri = matlab.net.URI('http://www.mathworks.com');
response = send(request,uri);
```

Search for `Cache-Control` and display the value.

```
field = response.getFields('Cache-Control');
value = field.Value
```

```
value =

  string

    "no-store, no-cache, must-revalidate, post-check=0, pre-check=0"
```

Tips

- The `HeaderField` constructor creates fields of class `HeaderField`. To create a field of a class defined in the `matlab.net.http.field` package, use the subclass constructor instead. For a list of subclasses, call the `HeaderField.displaySubclasses` method.

  For example, the `matlab.net.http.field.DateField` subclass creates a Date header field. If you use the `HeaderField` class to create a Date field, the `DateField` class interprets and enforces the value, even though `HeaderField` is not an instance of `DateField`. Likewise, if you convert the field value to a MATLAB `datetime` value, the `DateField.convert` method is used.
- If the `HeaderField` constructor rejects the `Name` and `Value` arguments, use the `GenericField` class constructor instead.

See Also

See Also

matlab.net.http.field.GenericField

Introduced in R2016b

char

Class: matlab.net.http.HeaderField
Package: matlab.net.http

Return header fields as formatted character vector

Syntax

```
str = char(obj)
```

Description

`str = char(obj)` returns an array of header fields as a MATLAB character vector. For more information, see matlab.net.http.HeaderField.string.

Input Arguments

`obj` — Header fields

`matlab.net.http.HeaderField` object

Header fields, specified as an array of `matlab.net.http.HeaderField` objects.

Attributes

`Sealed`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.net.http.HeaderField.string

Introduced in R2016b

convert

Class: matlab.net.http.HeaderField
Package: matlab.net.http

Convert header field value to MATLAB type

Syntax

```
value = convert(fields)
```

Description

`value = convert(fields)` converts the `Value` property of each element of `fields` to a MATLAB type.

For each header field in `fields`, MATLAB checks the `matlab.net.http.field` package for a class that supports a name with the same value as the `fields.Name` property. If the package contains a class for this field, then `convert` invokes the `convert` method of that class. To see the classes in the `field` package, call the `matlab.net.http.HeaderField.displaySubclasses` method.

If the conversion fails or if no class supports one of the `fields.Name` properties, then `convert` throws an exception.

This method does not work on heterogeneous arrays. All members of `fields` must be the same class.

Input Arguments

`fields` — Header fields

vector of class objects from the `matlab.net.http.field` package

Header fields, specified as a vector of class objects from the `matlab.net.http.field` package. All members of `fields` must be the same class.

Output Arguments

`value` — Header field values
vector of MATLAB types

Header field values, returned as a vector of MATLAB types. The types returned depend on the value of the specific class `convert` method.

Examples

Display datetime Value in Header Field

Send a message to the Hubble Heritage website and display the year an image was modified.

```
uri = matlab.net.URI('http://heritage.stsci.edu/2007/14/images/p0714aa.jpg');
req = matlab.net.http.RequestMessage;
r = send(req,uri);
d = convert(getFields(r,'Last-Modified'));
LastModified = d.Year
```

```
LastModified =

        2007
```

See Also

See Also
matlab.net.http.HeaderField.displaySubclasses

Introduced in R2016b

convertLike

Class: matlab.net.http.HeaderField
Package: matlab.net.http

Convert header field value like another header field

Syntax

```
value = convertLike(fields,other)
```

Description

`value = convertLike(fields,other)` converts the `Value` property of each element of `fields` to a MATLAB type, using conversion rules of the field `other`.

For each header field in `fields`, MATLAB checks the `matlab.net.http.field` package for a class that supports a name with the same value as the `fields.Name` property. If the package contains a class for this field, then `convert` invokes the `convert` method of that class. To see the classes in the `field` package, call the `matlab.net.http.HeaderField.displaySubclasses` method.

If the conversion fails or if no class supports one of the `fields.Name` properties, then `convertLike` throws an exception.

This method does not support heterogeneous arrays. All members of `fields` must be the same class.

Input Arguments

`fields` — Header fields

vector of `matlab.net.HeaderField` objects

Header fields, specified as a vector of `matlab.net.HeaderField` objects. All members of `fields` must be the same class.

`other` — Field to use for conversion rules
string | character vector | `matlab.net.http.HeaderField` object | `meta.class` identifying a `HeaderField` subclass

Field to use for conversion rules, specified as string, character vector, `HeaderField` object, or `meta.class` identifying a `HeaderField` subclass in the `matlab.net.http.field` package.

Output Arguments

`value` — Header field values
vector of MATLAB types

Header field values, returned as a vector of MATLAB types. The types returned depend on the value of the specific class `convert` method.

Examples

Get datetime Value from Created-Date Header Field

The `response` variable is a message that has a `Created-Date` header field. Its value is formatted like an `HTTPDateField` object, which returns a `datetime` object.

```
myField = response.getFields('Created-Date');
date = myField.convertLike(?matlab.net.http.field.HTTPDateField);
```

See Also

See Also
matlab.net.http.HeaderField.displaySubclasses | matlab.net.http.HeaderField.convert

Introduced in R2016b

matlab.net.http.HeaderField.displaySubclasses

Class: matlab.net.http.HeaderField
Package: matlab.net.http

Display supported HeaderField subclasses

Syntax

```
matlab.net.http.HeaderField.displaySubclasses
[fields,names] = matlab.net.http.HeaderField.displaySubclasses
```

Description

`matlab.net.http.HeaderField.displaySubclasses` displays all subclasses of the `HeaderField` class in the `matlab.net.http.field` package and the names of the header fields they support. Use these subclasses to construct common header fields.

`[fields,names] = matlab.net.http.HeaderField.displaySubclasses` returns the subclass names in `fields` as an array of strings. The method returns the header field names that the subclasses support in `names`, a cell array of string vectors that the subclasses support. `names{i}` contains the names supported by `fields(i)`. If `fields(i)` has no constraints on supported names, then `names{i}` is empty.

Attributes

Sealed	true
Static	true

Examples

Display Reserved Header Field Names

Display all header field names from classes in the `matlab.net.http.field` package. Use this command when you chose a name for an `IntegerField` or

`URIReferenceField` header field object. The `Name` property for these objects cannot be one of the names in this list.

`matlab.net.http.HeaderField.displaySubclasses`

```
Available classes in matlab.net.http.field and names they support:
AcceptField              Accept
AuthenticateField        WWW-Authenticate, Proxy-Authenticate
AuthenticationInfoField  Authentication-Info, Proxy-Authentication-Info
AuthorizationField       Authorization, Proxy-Authorization
ConnectionField          Connection
ContentLengthField       Content-Length
ContentLocationField     Content-Location
ContentTypeField         Content-Type
CookieField              Cookie
DateField                Date
GenericField
HTTPDateField            Date, Expires, Retry-After, Accept-Datetime, Last-Modified, It
HostField                Host
IntegerField
LocationField            Location
SetCookieField           Set-Cookie
URIReferenceField
```

Display Header Field Names Supported by HTTPDateField

Show the header fields that you can create using the `HTTPDateField` class.

```
[fields,names] = matlab.net.http.HeaderField.displaySubclasses;
for i = 1:numel(fields)
    if (strcmp(fields(i),'HTTPDateField'))
        disp(names{i})
        break
    end
end
```

```
    "Date"    "Expires"    "Retry-After"    "Accept-Datetime"    "Last-Modified"    "It
```

See Also

Topics

Method Attributes

Introduced in R2016b

eq

Class: matlab.net.http.HeaderField
Package: matlab.net.http

Compare two HeaderField arrays

Syntax

```
field1 == field2
tf = eq(field1,field2)
```

Description

`field1 == field2` compares two `HeaderField` arrays element by element, returning an array of logical values indicating matching elements. The arrays must have the same dimensions, unless one is a scalar.

Two header fields are equal if they are functionally equivalent, even if they are not identical. Functionally equivalent means both of these conditions are true:

- `Name` properties match using a case-insensitive comparison
- `Value` properties match. If the `convert` method is supported for the `HeaderField` type, MATLAB uses the `isequal` method on the results of `convert`. If `convert` is not supported, comparisons are based on a case-sensitive match of the `Value` strings.

The == method compares the `Name` and `Value` properties only. The method ignores the actual classes of `field1` and `field2`, since both are instances of the `HeaderField` class.

`tf = eq(field1,field2)` is an alternative way to execute `field1` == `field2`.

Input Arguments

`field1` — Header field
`matlab.net.http.HeaderField` object

Header field, specified as a `matlab.net.http.HeaderField` object or a vector of `HeaderField` objects.

`field2` — Header field
`matlab.net.http.HeaderField` object

Header field, specified as a `matlab.net.http.HeaderField` object or a vector of `HeaderField` objects.

Output Arguments

`tf` — Indicator that fields match
logical scalar or array

Indicator that fields match, returned as a logical scalar or array.

Examples

Different Header Field Classes Are Equivalent

This comparison evaluates to true, even though one object being compared is a `HeaderField` object and the other is a `DateField` object.

```
import matlab.net.http.HeaderField
import matlab.net.http.field.DateField
dt = datetime('now');
HeaderField('Date',dt) == DateField(dt)
```

```
ans = logical
   1
```

See Also

See Also

matlab.net.http.HeaderField.convert | matlab.net.http.HeaderField.isequal | matlab.net.http.HeaderField.displaySubclasses

Introduced in R2016b

isequal

Class: matlab.net.http.HeaderField
Package: matlab.net.http

Compare two HeaderField arrays

Syntax

```
tf = isequal(field1,field2)
```

Description

`tf = isequal(field1,field2)` returns logical 1 (`true`) if header field array `field1` is equal to header field array `field2`. Otherwise, it returns logical 0 (`false`). The arrays must be the same size and corresponding elements must be equal according to the `HeaderField.eq` method.

Input Arguments

`field1` — Header field
`matlab.net.http.HeaderField` object

Header field, specified as a `matlab.net.http.HeaderField` object or a vector of `HeaderField` objects.

`field2` — Header field
`matlab.net.http.HeaderField` object

Header field, specified as a `matlab.net.http.HeaderField` object or a vector of `HeaderField` objects.

Examples

Compare Fields in HTTP Request and Response Messages

Create a Content-Type field in a request message to `mathworks.com`.

```
uri = matlab.net.URI('http://www.mathworks.com');
req = matlab.net.http.RequestMessage;
req = addFields(req,matlab.net.http.HeaderField('Content-Type','text/html;charset=utf-8
resp = send(req,uri);
```

Search for a Content-Type field in each message and compare the fields. The messages contain the same header fields.

```
f1 = getFields(req,'Content-Type');
f2 = getFields(resp,'Content-Type');
isequal(f1,f2)
```

```
ans =

  logical

   1
```

See Also

See Also

matlab.net.http.HeaderField.eq

Introduced in R2016b

string

Class: matlab.net.http.HeaderField
Package: matlab.net.http

Return header fields as formatted string

Syntax

```
str = string(fields)
```

Description

`str = string(fields)` returns an array of header fields as a string. The string is formatted as it appears in a message, with newline characters inserted between the fields.

Input Arguments

`fields` — Header fields
array of `matlab.net.http.HeaderField` objects

Header fields, specified as an array of `matlab.net.http.HeaderField` objects.

Example: `string(request.Header)`

Attributes

`Sealed`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Display Header Fields

Display header fields for a request message.

```
uri = matlab.net.URI('http://www.mathworks.com');
req = matlab.net.http.RequestMessage;
req = complete(req,uri);
s = string(req.Header)
```

```
s =
Host: www.mathworks.com
User-Agent: MATLAB/9.0.0.358699 (R2016b)
Date: Tue, 29 May 2016 18:36:52 GMT
Connection: close
```

See Also

Introduced in R2016b

parse

Class: matlab.net.http.HeaderField
Package: matlab.net.http

Parse header field value and return as strings

Syntax

```
value = parse(obj)
```

```
value = parse(obj,fields)
```

```
value = parse( ___ ,Name,Value)
```

Description

`value = parse(obj)` parses the `Value` property of the header field and returns strings. Use this method to process header fields for which there is no class in the `matlab.net.http.field` package. Use the matlab.net.http.HeaderField.displaySubclasses method to display classes in the package. For classes in the package, use the corresponding `convert` method to parse the value.

The parsing rules are based on sections 3.2.4-3.2.6 of RFC 7230 Message Syntax and Routing and are augmented to interpret multiple values.

`value = parse(obj,fields)` specifies the names to use for unnamed `struct` fields.

If the Nth field of a `struct` has no name, the corresponding Nth name in `fields` exists and is nonempty. It is used instead of `Arg_N`. Using this syntax forces the returned `value` to be a `struct` (or vector of `struct` objects) with at least as many fields as the length of `fields`. Typically this pattern occurs in header fields that begin with a token followed by attribute pairs.

`value = parse( ___ ,Name,Value)` specifies one or more delimiters. The default delimiters are commas and semicolons. You can use any of the input arguments in the previous syntaxes.

Input Arguments

`obj` — Header field

`matlab.net.http.HeaderField` object

Header field, specified as a `matlab.net.http.HeaderField` object or a vector of `HeaderField` objects.

`fields` — Names of `struct` fields

string vector | character vector | cell array of character vectors

Names of `struct` fields, specified as a string vector, a character vector, or a cell array of character vectors.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'ArrayDelimiters'` — Delimiters separating array elements

string vector | character vector | cell vector of regular expressions | `''` | `[]`

Delimiters separating array elements, specified as:

- A string vector, character vector, or cell vector of regular expressions specifying the possible delimiters, interpreted in the order they appear in the vector.
- `''` — Do not parse `obj` as an array. MATLAB inserts quotes and escape characters.
- `[]` — Do not parse `obj` as an array. MATLAB does not insert quotes or escape characters into array elements.

`'MemberDelimiters'` — Delimiters separating structure fields

string vector | character vector | cell vector of regular expressions | `''` | `[]`

Delimiters separating structure fields, specified as:

- A string vector, character vector, or cell vector of regular expressions specifying the possible delimiters, interpreted in the order they appear in the vector.

- `''` — Do not parse `obj` as a `struct`. MATLAB inserts quotes and escape characters.
- `[]` — Do not parse `obj` as a `struct`. MATLAB does not insert quotes or escape characters into `struct` values.

Output Arguments

`value` — Header field `Value` property

string vector | `struct` array | cell array of `struct`

Header field `Value` property, returned as a string vector, a `struct` array, or a cell array of `struct` values.

MATLAB parses the `Value` property as a list of comma-separated strings. Each string becomes an element of the `value` vector. An element is one of the following:

- `struct` of `name=value` pairs
- `struct` of semicolon-separated values
- string, if the field does not contain a semicolon or an equal sign or does not appear to be a structure.

`parse` converts the name of each `struct` field to a valid MATLAB identifier using `matlab.lang.makeValidName`. For the following `Value` property, `parse` creates field name `x_p1` from `_p1`.

To resolve duplicate names, `parse` calls `matlab.lang.makeUniqueStrings`. For the following `Value` property, `parse` creates field name `p11` from duplicate field name `p1`.

If a `struct` field contains only a `Value`, but not a `name=value` pair, then the field name is `Arg_N`. The `N` is the ordinal position of the field in the `struct`. For the following `Value` property, `parse` creates field name `Arg_2` for the missing name.

`Value` Property	Output Argument	Description
`"p1=first p2=second"`	`p1: "first"` `p2: "second"`	`parse` returns a `struct` for `name=value` pairs.
`"first;second"`	`Arg_1: "first"` `Arg_2: "second"`	`parse` returns a `struct` and assigns default field names for semicolon-separated values.

Value Property	Output Argument	Description
"first second"	"first second"	parse returns a string if the field does not contain a semicolon or an equal sign or does not appear to be a structure.
"_p1=first p2=second"	x_p1: "first" p2: "second"	parse converts invalid field name _p1 to x_p1.
"p1=first p1=second"	p1: "first" p11: "second"	parse converts duplicate field name p1 to p11.
"p1=first; second"	p1: "first" Arg_2: "second"	parse creates field name Arg_2 for the missing name for Value second.
"p1=first; p3=(a comment here)"	p1: "first" p3: "(a comment her	parse retains comments.

If obj is a vector of header fields, then the parse method concatenates the results of parsing each of the fields into a single array. If the values are not of the same type, then value is a cell array.

Value Property of Header Field Vector	Element of Cell Array Output Argument
"p1=first p2=second"	x{1} = p1: "first" p2: "second"
"third"	x{2} = third

Examples

Change Default Field Name

Assume that you receive a header field H in a response message from a server with the Value property media-type; name1=value1; name2=value2. To run this example, create the variable H.

```
H = matlab.net.http.HeaderField('Test-Name','media-type; name1=value1; name2=value2')
```

```
H =

  HeaderField with properties:

     Name: "Test-Name"
    Value: "media-type; name1=value1; name2=value2"
```

Parse the `Value` property of `H`. MATLAB creates a default field name `Arg_1`.

```
var = parse(H)
```

```
var =

  struct with fields:

    Arg_1: "media-type"
    name1: "value1"
    name2: "value2"
```

Change the default to a more meaningful name `MediaType`.

```
var = parse(H,'MediaType')
```

```
var =

  struct with fields:

    MediaType: "media-type"
        name1: "value1"
        name2: "value2"
```

Attributes

`Sealed`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

`matlab.lang.makeUniqueStrings` | `matlab.lang.makeValidName`

External Websites

RFC 7230 Message Syntax and Routing

Introduced in R2016b

matlab.net.http.HTTPException class

Package: matlab.net.http
Superclasses: MException

Exception thrown by HTTP services

Description

The `HTTPException` class contains information about errors.

The `RequestMessage.send` method throws an HTTP exception when an error occurs *after* it attempts to send a message. For instance, the method throws an exception when:

- Something fails during transmission and the server does not receive the message. Possible causes of failure include a network problem, timeout, or bad URI.
- The server receives the message, but something fails while it is sending a response.
- The server receives the message and sends a response, but the response cannot be converted based on its Content-Type. For example, a bad JSON string is received.

If an error occurs *before* the `RequestMessage.send` method attempts to send the message, then it throws a standard `MException` instead.

The `HTTPException` describes the error in the `MException.cause` property and returns a history of the transaction. The `History` property contains the message that was sent and the message that was received, if any.

Properties

`Request` — Request message as completed

`matlab.net.http.RequestMessage` object

Request message as completed, specified as a `matlab.net.http.RequestMessage` object. `Request` contains the last message that was sent or would have been sent. If this message header was successfully sent, then it is the same as the last entry in the `History.Request` property. Otherwise, the last entry in the `History` property does not contain the message you attempted to send.

Attributes:

GetAccess	public
SetAccess	private

URI — URI for last message

matlab.net.URI object

URI for the last message that was sent or would have been sent, specified as a `matlab.net.URI` object.

Attributes:

GetAccess	public
SetAccess	private

History — History of transaction

vector of `matlab.net.http.LogRecord` objects

History of the transaction, specified as a vector of `matlab.net.http.LogRecord` objects. `History` only contains messages whose headers were successfully sent or received. If an exception occurs when sending or receiving a message header, then `History` does not contain that message. If an error occurs while sending or receiving the payload, or during conversion of the data to or from the payload, then the `MessageBody` `Payload` property and/or `Data` properties might not be set.

Attributes:

GetAccess	public
SetAccess	private

Examples

Response Payload Not Valid Format for Content-Type

Send a message to the website in the `url` variable. This destination returns a message whose `Payload` property contains an invalid JPEG image for Content-Type `image/jpeg`.

```
try
    resp = RequestMessage().send(url);
catch e
    if isa(e,'matlab.net.http.HTTPException')
        response = e.History(end).Response;
        if ~isempty(response)
            data = response.Body.Data;
            payload = resonse.Body.Payload
        end
    end
end
```

The `payload` variable contains the bytes that were received as a `uint8` vector. Since the Content-Type is not character-based, the `data` variable is empty.

See Also

See Also

matlab.net.http.RequestMessage.send | matlab.net.uri | MException | matlab.net.http.LogRecord

Topics

Property Attributes

Introduced in R2016b

matlab.net.http.HTTPOptions class

Package: matlab.net.http

Options controlling HTTP message exchange

Description

Use the `HTTPOptions` class to create options for HTTP request messages. Use this object to specify options that are constant across several requests.

Construction

`obj = matlab.net.http.HTTPOptions` creates HTTP options with default property values.

`obj = matlab.net.http.HTTPOptions(Name,Value)` creates HTTP options with additional properties specified by one, or more name-value pair arguments. `Name` is the property name and `Value` is the corresponding value. You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`. Unspecified properties are set to their default values.

Properties

`Authenticate` — Whether Credentials used for authentication

`true` (default) | `false`

Whether Credentials are used for authentication, specified as `true` or `false`.

If `Authenticate` is true, then implement the supported authentication method requested by the server or proxy. The authentication is based on the `Credentials` property and the proxy user name and password set in MATLAB Web Preferences, if any. MATLAB supports `Basic` and `Digest` authentication only.

The response message contains the server or proxy authentication challenge when any of these conditions exist.

- `Authenticate` is false.
- No appropriate `Credentials` properties are found for this request.
- Authentication fails.

Data Types: `logical`

`ConnectTimeout` — Seconds to wait for initial server connection

10 (default) | integer | `Inf`

Seconds to wait for initial server connection, specified as an integer. The default is 10 seconds. If the timeout period is exceeded, then `ConnectTimeout` throws an error. To disable timeouts, set `ConnectTimeout` to `Inf`.

`ConnectTimeout` determines how long to wait to complete a connection attempt with a server before throwing an error. This timeout does not limit how long it takes to receive a complete response.

`ConvertResponse` — Whether to convert to MATLAB type

`true` (default) | `false`

Whether to convert to MATLAB type, specified as `true` or `false`.

MATLAB converts the raw `uint8` payload in the `MessageBody.Payload` property to MATLAB data based on the Content-Type in the response message. See the `MessageBody.Data` property for conversion rules. If the conversion is successful, then `Data` contains the converted data and `Payload` is empty.

If `ConvertResponse` is false, then the behavior depends on whether the Content-Type specifies character data.

- If the Content-Type has an explicit or default charset attribute, then the payload is converted to text and stored in `Data` without further processing.
- If the Content-Type does not specify character data or there is no charset, and MATLAB does not support the Content-Type, then `Data` contains the raw `uint8` payload.

In all cases, the `Payload` property is deleted unless you also set the `SavePayload` property to `true`.

`ConvertResponse` is ignored if:

- The message was encoded (compressed) and decoding failed.

- The `DecodeResponse` property is false.

Data Types: `logical`

`DecodeResponse` — Whether to decode compressed data

`true` (default) | `false`

Whether to decode compressed data, specified as `true` or `false`. Decoding means to decompress (decode) the response payload when the server returns compressed (encoded) data. Decoding occurs before conversion based on the Content-Type field.

A message is encoded when there is a Content-Encoding field that specifies a compression algorithm. MATLAB supports content coding values `gzip`, `x-gzip`, and `deflate`. The value `identity` means that there is no encoding, which is equivalent to the message having no Content-Encoding field. If MATLAB does not support the Content-Encoding type, decoding does not occur even if `DecodeResponse` is true.

If `DecodeResponse` is false and the data is encoded, then:

- The `MessageBody.Payload` property contains the raw unencoded payload.
- The `MessageBody.Data` property remains empty.
- No conversion occurs, regardless of the setting of the `ConvertResponse` property.

Data Types: `logical`

`Credentials` — Authentication credentials

empty (default) | vector of `matlab.net.http.Credentials` objects

Authentication credentials, specified as a vector of `matlab.net.http.Credentials` objects. `Credentials` are used only if the `Authenticate` property is true.

When you access the same server multiple times during a session, for maximum performance specify the same `Credentials` vector or same `HTTPOptions` object for each request. `Credentials` contains cached information that speeds up subsequent authentications.

`MaxRedirects` — Number of redirects allowed

20 (default) | 0 | integer

Number of redirects allowed, specified as an integer for a given request. The default number of redirects is 20. Set to 0 to disable redirection.

If `MaxRedirects` is nonzero, then cookies received from the server in each redirect response are copied into the redirected message. After `MaxRedirects`, the response message contains the next redirect message.

`ProgressMonitorFcn` — Progress monitor handler

function handle | empty

Progress monitor handler, specified as a function handle to a `matlab.net.http.ProgressMonitor` object. If `UseProgressMonitor` is true, then MATLAB calls the `ProgressMonitor` function to report the progress of a transfer. If `UseProgressMonitor` is false or `ProgressMonitorFcn` is empty, then no progress is reported.

Data Types: `function_handle`

`ProxyURI` — Proxy server address

empty (default) | `matlab.net.URI` | string

Proxy server address, specified as a `matlab.net.URI` object or a string of the form `host:port` or `//host:port`.

`ProxyURI` is used only if the `UseProxy` property is true. `ProxyURI` overrides the proxy specified in MATLAB Web Preferences and any proxy set in Windows system settings.

`SavePayload` — Whether Payload saved

`false` (default) | `true`

Whether Payload is saved, specified as `true` or `false`. The payload is the raw bytes received from or sent to the server, saved in the `MessageBody.Payload` property.

In a request message, setting `SavePayload` to `true` saves the payload after data conversion. In a response message, the bytes are saved before conversion.

Use `SavePayload` as a debugging tool. For example, the server cannot process the body of a request, or there is a failure converting a response body to a MATLAB type. Setting `SavePayload` to `true` might consume a considerable amount of memory because the payload is at least equal to the size of the converted data.

To retrieve the response payload without conversion, set the `ConvertResponse` property to `false` and read `MessageBody.Data` instead.

Data Types: `logical`

`UseProgressMonitor` — Whether to display progress

`false` (default) | `true`

Whether to display progress, specified as `true` or `false`. Set `UseProgressMonitor` to `true` to report progress of a transfer using the function specified by the `ProgressMonitorFcn` property.

Data Types: `logical`

`UseProxy` — Whether using proxy

`true` (default) | `false`

Whether using a proxy, specified as `true` or `false`.

If `UseProxy` is true, then MATLAB selects the first one of the following proxies:

- The value in the `ProxyURI` property, if any.
- The proxy specified in MATLAB Web Preferences, if any.
- The proxy specified in your system preferences (Windows only).

All requests go directly to the destination URI without a proxy when any of the following are true.

- `UseProxy` is false.
- `UseProxy` is true but `ProxyURI` is empty and there is no proxy set in preferences.

MATLAB automatically diverts a message to a proxy when `UseProxy` is true.

Data Types: `logical`

`CertificateFilename` — File name of root certificates

string | character vector | `'default'`

File name of root certificates, specified as a string or character vector denoting the location of a file containing certificates. The file is in privacy-enhanced mail (PEM) format. The location must be in the current folder, in a folder on the MATLAB path, or a full or relative path to a file. If you specify the value `'default'`, then `CertificateFilename` is set to the MATLAB certificate file at:

```
fullfile(matlabroot,'sys','certificates','ca','rootcerts.pem')
```

If `CertificateFilename` is not empty and you request an HTTPS connection, then the certificate from the server is validated against the certification authority certificates in

the PEM file. Standard HTTPS mechanisms use this validation to validate the signature on the server certificate and the entire certificate chain. If verification fails, a connection is not allowed.

To add certificates to `rootcerts.pem`, copy the file to a working folder, edit the file, and add your certificates to it. PEM files are ASCII files which are easily modified. Since security of HTTPS connections depends on the integrity of this file, protect it appropriately. MATLAB does not manage certificates or certificate files, but there are third-party tools for managing PEM files.

If `CertificateFilename` is empty, then MATLAB checks if the certificate domain of the server matches the host name of the server and that it is not expired. The signature is not validated.

Set `CertificateFilename` to empty (`''`) only if you cannot establish a connection due to a missing or expired certificate.

Data Types: `char` | `string`

Examples

Extend Connection Timeout

Increase connection timeout to 20 seconds.

Change the default timeout option for the request message specified in the variable `request` sent to the server specified in the variable `url`.

```
options = matlab.net.http.HTTPOptions('ConnectTimeout',20);
response = request.send(url,options);
```

See Also

See Also

matlab.net.http.RequestMessage.send | matlab.net.http.MessageBody | matlab.net.http.ProgressMonitor | matlab.net.URI

Topics

Web Preferences

Introduced in R2016b

matlab.net.http.LogRecord class

Package: matlab.net.http

HTTP history log record

Description

A vector of `LogRecord` objects represents a history of request-response message pairs exchanged between client and server during an HTTP operation, such as `RequestMessage.send`. The `send` method returns history as an output argument. When an error occurs, the `HTTPException` object contains a `History` property.

Use the `LogRecord` class for debugging.

Properties

`URI` — URI of request

`matlab.net.URI`

URI of the request, specified as a `matlab.net.URI` object.

`Request` — Request message

`matlab.net.http.RequestMessage` object

Request message, specified as a `matlab.net.http.RequestMessage` object. `Request` contains a value if MATLAB attempted to send the header of the request message, even if an exception occurs in the process of sending the payload. If an exception occurs, then the `Exception` property contains the `MException`.

The `Request.Body` property contains the body of the request message, if any. The `Request.Body.Payload` property is set only if you specify the `SavePayload` property in an `HTTPOptions` object.

`RequestTime` — Start and end times of request message

pair of `datetime` objects

Start and end times of a request message, specified as a pair of `datetime` objects. `RequestTime` contains a value only if the `Request` property is set.

The `RequestTime` values are an approximation of the times when the first and last bytes, including the payload, of a request message were sent. If an exception occurs during transmission, then the end time is the time of the exception, and the `Exception` property contains the `MException`.

Data Types: `datetime`

`Response` — Response message
`matlab.net.http.ResponseMessage` object

Response message, specified as a `matlab.net.http.ResponseMessage` object. `Response` contains a value only if the complete header of the response is received successfully, even if an exception occurs receiving the payload. If an exception occurs while trying to send the request or during receipt of the header, then `Response` might be empty. If an exception occurs, then the `Exception` property contains the `MException` object.

The `Response.Body` property is set if you specify the `SavePayload` property in an `HTTPOptions` object and the response has a body. If `Response.Body` is set, then the `Response.Body.Payload` property is also set.

`ResponseTime` — Start and end times of response message
pair of `datetime` objects

Start and end times of the response message, specified as a pair of `datetime` objects. `ResponseTime` contains a value only if the `Response` property is set.

The `ResponseTime` values are an approximation of the times when the first and last bytes of the response message are received. If an exception occurs during receipt, then the end time is the time of the exception, and the `Exception` property contains the `MException` object.

Data Types: `datetime`

`Disposition` — Disposition of exchange
`matlab.net.http.Disposition` enumeration

Disposition of the exchange, specified as a `matlab.net.http.Disposition` enumeration, indicating the result of the exchange. If the `Disposition` value is `Done`,

then the `Exception` property is empty and all fields of the `LogRecord` contain their final values.

Some values of `Disposition` imply that an exception was saved in the `Exception` property. If an exception occurs, the `Response` or `Request` properties might not be set. When these values are set depends on whether the exception occurs before or during the transmission of the headers or the payload.

`Exception` — Exception
`MException`

Exception, specified as an `MException` object that occurred during processing of the exchange. If an error occurred during the transmission, receipt, or processing of the response, this property is the `MException` containing the exception. The value of the `Disposition` property determines whether this property is set.

Methods

show	Display or return human-readable version of vector of LogRecords

See Also

See Also

matlab.net.http.RequestMessage.send | matlab.net.http.ResponseMessage | matlab.net.http.StartLine | matlab.net.URI | matlab.net.http.Disposition

Introduced in R2016b

show

Class: matlab.net.http.LogRecord
Package: matlab.net.http

Display or return human-readable version of vector of LogRecords

Syntax

```
show(records)
show(records,maxlength)
```

```
strs = show( ___ )
```

Description

`show(records)` displays the entire contents of the `records` array.

`show(records,maxlength)` displays `maxlength` characters of the message bodies. If a message body contains fewer than `maxlength` characters, then the method displays the entire message body.

`strs = show( ___ )` returns the output as a string instead of displaying it and can include any of the input arguments in previous syntaxes. `strs` contains one string for each `LogRecord` object in `records`.

Input Arguments

`records` — Log records
array of `matlab.net.http.LogRecord` objects

Log records, specified as an array of `matlab.net.http.LogRecord` objects.

`maxlength` — Number of bytes
integer

Number of bytes to convert, specified as an integer.

Examples

Display Last Log Record for Message Sent to `mathworks.com`.

```
import matlab.net.*
import matlab.net.http.*
import matlab.net.http.field.*

r = RequestMessage;
uri = URI('http://www.mathworks.com')
[resp,~,hist] = r.send(uri);

show(hist(end),100)
```

```
REQUEST 1 to http://www.mathworks.com/?requestedDomain=www.mathworks.com at 29-Apr-2016
GET /?requestedDomain=www.mathworks.com HTTP/1.1
Cookie: Bjava-apache-all-ah=2831032236.0.0000; X_MW_DOMAIN=www.mathworks.com; JSESSION
User-Agent: MATLAB/9.0.0.379006 (R2016b)
Date: Fri, 29 Apr 2016 13:30:33 GMT
Connection: Close
Host: www.mathworks.com

RESPONSE 1 at 29-Apr-2016 09:30:35 - 29-Apr-2016 09:30:36 (0.141 sec)
HTTP/1.1 200 OK
Date: Fri, 29 Apr 2016 13:30:35 GMT
Server: MathworksServer_08
X-Powered-By: Servlet/3.0 JSP/2.2 (MathworksServer_08 Java/Oracle Corporation/1.7)
Cache-Control: no-store, no-cache, must-revalidate, post-check=0, pre-check=0
Pragma: no-cache
Expires: Sun, 26 Apr 2015 11:56:16 GMT
Content-Type: text/html;charset=utf-8
Via: 1.1 www.mathworks.com
Vary: Accept-Encoding
Transfer-Encoding: chunked
Connection: close



<!DOCTYPE HTML>
<html>
<head>
<title>MathWorks — Makers of MATLAB and Simulink</title>
<meta char
```

```
<< 46590 total characters of text/html UTF-8 data >>
```

The information displayed depends on your system.

See Also

Introduced in R2016b

matlab.net.http.MediaType class

Package: matlab.net.http

Internet media type used in HTTP headers

Description

The `MediaType` class represents an internet media type, as defined in RFC 7231 — Media Type, section 3.1.1.1. The `MediaType` class also represents the contents of a Content-Type field or an Accept field.

Construction

`obj = matlab.net.http.MediaType(type,paramName,paramValue)` creates a `MediaType` object given by `type`, with additional options specified by one or more `paramName`,`paramValue` pair arguments. You can specify several `paramName`,`paramValue` pair arguments in any order as `paramName1,paramValue1,...,paramNameN,paramValueN`.

`obj = matlab.net.http.MediaType(text)` parses `text` to create a media type. Quotes and escape characters within the values of parameters are removed. This constructor does not prevent creating a `MediaType` object with duplicate parameter names.

Input Arguments

`type` — Media type
string

Media type, specified as a string. The type must have the syntax of `type/subtype`.

`paramName` — Parameter name
string

Parameter name, specified as a nonempty string.

`paramValue` — Parameter value
string | type acceptable to the string function

Parameter value, specified as a nonempty string or type acceptable to the `string` function. The `string` function adds quotes and escapes as needed. Do not include quotation or escape characters within `paramValue`.

`text` — Media type
string

Media type, specified as a string.

Properties

`Type` — Primary type
string

Primary type, specified as a nonempty string.

`Subtype` — Subtype
string

Subtype, specified as a nonempty string.

`Parameters` — Parameters (read-only)
nx2 string matrix

Parameters, specified as an nx2 string matrix. Parameters(i,1) is the name of the ith parameter and Parameters(i,2) is its value. Use the `setParameter` method to add or change parameter values. To reorder or remove parameters, construct a new `MediaType` object with the parameters you want to use from an existing `MediaType` object.

Attributes:

`GetAccess`	`public`
`SetAccess`	`private`

`MediaInfo` — Media type portion (read-only)
`matlab.net.http.MediaType` object

Media type portion, specified as a `matlab.net.http.MediaType` object. `MediaInfo` contains the `MediaType` object without the parameters at or following the first `q` parameter.

Attributes:

`Dependent`	`true`
`GetAccess`	`public`
`SetAccess`	`immutable`

`Weight` — Weight parameter `q`

double | empty | NaN

Weight parameter `q`, specified as double. If there is no `q` parameter, then `Weight` is empty. If the parameter cannot be converted to a double, then `Weight` is NaN. If you set this property, it must have a value in the range 0–1. Setting this value modifies the final `q` parameter in the object or adds one to the end of the parameter list.

Attributes:

`Dependent`	`true`

Methods

getParameter	Value of media type parameter
setParameter	Set value of media type parameter

These methods implement the equivalent MATLAB functionality for this class.

`eq` and `isequal`	Compare two MediaType objects
`char`	MediaType as character vector
`string`	MediaType as string

See Also

Topics

Property Attributes

External Websites

RFC 7231 — Media Type, section 3.1.1.1

Introduced in R2016b

getParameter

Class: matlab.net.http.MediaType
Package: matlab.net.http

Value of media type parameter

Syntax

```
value = getParameter(obj,name)
```

Description

`value = getParameter(obj,name)` returns the value of a `MediaType` parameter `name`. Parameter name matching is case-insensitive.

Input Arguments

`obj` — Media type
`matlab.net.http.MediaType` object

Media type, specified as a `matlab.net.http.MediaType` object.

`name` — Parameter name
string

Parameter name, specified as a string.

Output Arguments

`value` — Parameter value
array of strings | empty

Parameter value, returned as an array of nonempty strings. Parameter name matching is case-insensitive. If the parameter appears more than once, then `value` contains multiple elements. If the parameter does not exist, then `value` is empty.

See Also

See Also

matlab.net.http.MediaType.setParameter

Introduced in R2016b

setParameter

Class: matlab.net.http.MediaType
Package: matlab.net.http

Set value of media type parameter

Syntax

```
newType = setParameter(mediaType,name,value)
```

Description

`newType = setParameter(mediaType,name,value)` returns a copy of the specified `mediaType` parameter with the parameter `name` set to `value`, creating one if it does not exist. Parameter name matching is case-insensitive. If a parameter exists with the same name, but different case, the case is changed to the specified `name`. If more than one match is found, only the last value is set.

A new parameter is added to the end of the list of parameters. If a `q` parameter exists in the list, the new parameter is treated as part of the `accept-params` rather than the media-type.

Input Arguments

`mediaType` — Media type

`matlab.net.http.MediaType` object

Media type, specified as a `matlab.net.http.MediaType` object.

`name` — Parameter name

string

Parameter name, specified as a string.

`value` — Parameter value

scalar string | character vector | any type supporting the `string` method

Parameter value, specified as a scalar string, character vector, or any type supporting the `string` method. The resulting string must not be empty.

If `value` is empty or an empty string, parameter `name` is removed.

There is no validation of `value`.

Output Arguments

`newType` — Updated media type
`matlab.net.http.MediaType` object

Updated media type, returned as a `matlab.net.http.MediaType` object.

See Also

See Also

matlab.net.http.MediaType.getParameter

Introduced in R2016b

matlab.net.http.Message class

Package: matlab.net.http

HTTP request or response message

Description

The `Message` class is an abstract class used as a base class to create HTTP messages.

Properties

`StartLine` — First line of message

`matlab.net.http.StartLine` object

First line of message, specified as a `matlab.net.http.StartLine` object, if any.

`Header` — Message header

`[]` (default) | `matlab.net.http.HeaderField` object

Message header, specified as a `matlab.net.http.HeaderField` object or a vector of `HeaderField` objects. When you set the `Header` property, MATLAB checks the fields of the header to ensure that they are appropriate for the message type. The `RequestMessage` `send` and `complete` methods fill in any required header fields for a properly formed request.

`Body` — Message body

`[]` (default) | `matlab.net.http.MessageBody` object

Message body, specified as a `matlab.net.http.MessageBody` object or data acceptable to the `MessageBody` constructor. By default, `Body` is empty (set to `[]`). A request message containing a `Body` property normally uses a method such as `'PUT'` or `'POST'`, not the default value `'GET'`, but this syntax is not enforced.

In a completed or received message, if the message has a `ContentTypeField` header field, then the `MessageBody.ContentType` property is set to that value. Otherwise, `ContentType` is unchanged or empty.

`Completed` — Whether message is complete

`false` (default) | `true`

Whether message is complete, specified as `true` or `false`. A `true` value means that the message is complete.

`RequestMessage` methods that validate messages (`send` and `complete`) set the `Completed` property to `true` when:

- The message is valid.
- The processing is complete. For example, required header fields are added and the data is converted.

If the property is true, then these methods do not modify the message, and the `send` method sends the message without checking it for validity. Any later changes to this message change the value of `Completed` back to `false`.

Methods that return messages set `Completed` to `true` when:

- The `Body` or `Body.Data` properties are empty.
- The `Body.Payload` property contains the raw data.

If a request message contains data (`Body.Data` is not empty), then the property is true only if `Body.Payload` contains the raw data.

In a response message, the payload is set only if you set the `HTTPOptions.SavePayload` property to `true`.

Attributes:

`Transient`	`true`

Data Types: `logical`

Methods

char	Return message as character vector
string	Return message as string
addFields	Add fields to message header

changeFields	Change existing fields in message header
getFields	Return message header fields matching name or class
removeFields	Remove fields from message header
show	Display or return formatted version of message

Tips

- To send arbitrary headers and data in a request message, set the `Completed` property to `true` to prevent the `send` method from modifying the message. You still can use the `complete` method to validate the message, but the `send` method does not validate the message.

See Also

See Also

matlab.net.http.RequestMessage | matlab.net.http.ResponseMessage | matlab.net.http.MessageBody | matlab.net.http.field.ContentTypeField | matlab.net.http.HeaderField

Topics

Property Attributes

Introduced in R2016b

char

Class: matlab.net.http.Message
Package: matlab.net.http

Return message as character vector

Syntax

```
str = char(msg)
```

Description

`str = char(msg)` returns a message as a MATLAB character vector or a cell array of character vectors.

Input Arguments

`msg` — Message

`matlab.net.http.Message` object

Message, specified as a `matlab.net.http.Message` object or vector of `Message` objects.

See Also

See Also

matlab.net.http.Message.show | matlab.net.http.Message.string

Introduced in R2016b

string

Class: matlab.net.http.Message
Package: matlab.net.http

Return message as string

Syntax

```
str = string(msg)
```

Description

`str = string(msg)` returns a message, including the `Header` and `Body` properties, as a string.

Use for diagnostics or debugging.

Input Arguments

`msg` — Message
`matlab.net.http.Message` object

Message, specified as a `matlab.net.http.Message` object or vector of `Message` objects.

Output Arguments

`str` — Message
string or array of strings

Message, returned as a string or an array of strings.

If the `Body` property contains text, then the method displays the entire contents. Use the `Message.show` method to limit the amount of displayed text.

If `Body` does not contain text, then the method displays a message indicating the length of the data.

See Also

See Also

matlab.net.http.Message.show

Introduced in R2016b

addFields

Class: matlab.net.http.Message
Package: matlab.net.http

Add fields to message header

Syntax

```
msg = addFields(msg,fields)
msg = addFields(msg,fName,fValue)
msg = addFields(msg,fName1,fValue1,...,fNameN,fValueN)
msg = addFields(msg,index, ___ )
```

Description

`msg = addFields(msg,fields)` adds `fields` to the end of the header of each message and returns the updated message.

`addFields` does not check for duplicate fields, but the `RequestMessage` `send` and `complete` methods might reject inappropriate duplicates.

To prevent the `send` or `complete` methods from automatically adding a particular header field, call `addField` for that field with an empty (`[ ]`) `Value` property.

`msg = addFields(msg,fName,fValue)` adds field with name `fName` and value `fValue`.

`msg = addFields(msg,fName1,fValue1,...,fNameN,fValueN)` adds fields specified by `fName`, `fValue` pair arguments, in the order specified.

`msg = addFields(msg,index, ___ )` inserts fields at `index` and can include any of the input arguments in previous syntaxes.

Input Arguments

`msg` — Message
`matlab.net.http.Message` object

Message, specified as a `matlab.net.http.Message` object.

`fields` — Fields to add

one or more `matlab.net.http.HeaderField` objects

Fields to add, specified as a vector or comma-separated list of one or more `matlab.net.http.HeaderField` objects.

Example: `matlab.net.http.HeaderField('Accept','text/plain')`

`fName` — Header field name

string

Header field name, specified as a string.

Example: `'Accept'`

`fValue` — Header field value

string | any type valid for `fName`

Header field value, specified as a string or any type valid for `fName`. To use the default value for the field, set `fValue` to `''`. If the last value is missing, then it is the same as specifying `[]`.

Example: `'text/plain'`

`index` — Location in message header

integer

Location in the message header, specified as an integer. If `index` is greater than the length of the header or `index` is 0, the method adds fields to the end. If `index` is negative, the method counts from the end of the header.

Example: `-1` inserts `fields` before the last field

Examples

Add HTTP Accept Header Field

Create an Accept header field with value `'text/plain'` and add it to a default request message.

```
field = matlab.net.http.HeaderField('Accept','text/plain');
```

```
m = matlab.net.http.RequestMessage('get');
msg = addFields(m,field);
show(msg)
```

```
GET
Accept: text/plain
```

Add Multiple HTTP Header Fields

Add two header fields to a request message.

```
m = matlab.net.http.RequestMessage('get');
msg = addFields(m,'Accept','text/plain','Cache-Control','no-store, no-cache');
show(msg)
```

```
GET
Accept: text/plain
Cache-Control: no-store, no-cache
```

Insert HTTP Header Field

Create a request message with two header fields.

```
m = matlab.net.http.RequestMessage('get');
msg = addFields(m,'Accept','text/plain','Cache-Control','no-store, no-cache');
```

Insert a Content-Type header field before the last header field in a message.

```
f = matlab.net.http.HeaderField('Content-Type','text/plain');
msg = addFields(msg,-1,f);
show(msg)
```

```
GET
Accept: text/plain
Content-Type: text/plain
Cache-Control: no-store, no-cache
```

See Also

See Also

matlab.net.http.HeaderField | matlab.net.http.RequestMessage

Introduced in R2016b

changeFields

Class: matlab.net.http.Message
Package: matlab.net.http

Change existing fields in message header

Syntax

```
msg = changeFields(msg,fields)
msg = changeFields(msg,
FieldName1,FieldValue1,...,FieldNameN,FieldValueN)
```

Description

`msg = changeFields(msg,fields)` changes the existing fields in each message to the names, values, and types specified in `fields` and returns the updated message. This syntax might change the class of an existing field if the field name is a case-insensitive match to a name in `fields`.

This method throws an error when:

- All the specified fields are not already in the header.
- There is more than one field with the specified name.

`msg = changeFields(msg,
FieldName1,FieldValue1,...,FieldNameN,FieldValueN)` changes fields with the specified names to the indicated values.

Name matching is case-insensitive. However, if you specify a name that differs in case from the existing field name, then the field name changes to the specified name. This usage does not change the class of an existing field.

Input Arguments

`msg` — Message
`matlab.net.http.Message` object

Message, specified as a `matlab.net.http.Message` object.

`fields` — Fields to change
`matlab.net.http.HeaderField` objects

Fields to change, specified as a vector or comma-separated list of one or more `matlab.net.http.HeaderField` objects.

Example: `'Accept','text/plain'`

`FieldName1,FieldValue1,...,FieldNameN,FieldValueN` — Fields defined by name-value pairs
name-value pairs

Fields defined by name-value pairs. `FieldName` is specified as a string or character vector, and `FieldValue` is specified as any type valid for `FieldName`.

To use the default value for the field, set `FieldValue` to `''`.

If the last value is missing, it is the same as specifying empty (`[]`).

Examples

Show How Changing Field Value Changes Field Class

Create two Content-Length fields using the `HeaderField` class and its subclass, `ContentLengthField`. Change the value of the Content-Length field in a message, which changes the class of the field, depending on how you create the original header field.

Create two header files with the same properties. The fields have the same value, but the classes are different.

```
h1 = matlab.net.http.HeaderField('Content-Length',5);
h2 = matlab.net.http.field.ContentLengthField(5);
compareNames = eq(h1.Name,h2.Name)
```

```
compareNames = logical
   1
```

```
compareValues = eq(h1.Value,h2.Value)
```

```
compareValues = logical
   1
```

Create a request message using the h1 header field and display its class.

```
r = matlab.net.http.RequestMessage;
r.Header= h1;
h1Class = class(r.Header)
```

```
h1Class =
'matlab.net.http.HeaderField'
```

Change the Content-Length header field using the h2 header field. The header field class changes.

```
r1 = r.changeFields(h2);
h2Class = class(r1.Header)
```

```
h2Class =
'matlab.net.http.field.ContentLengthField'
```

Change the Content-Length header field using a name-value pair. The header field class does not change.

```
r1 = r.changeFields('Content-length',5);
class(r1.Header)
```

```
ans =
'matlab.net.http.HeaderField'
```

See Also

See Also

matlab.net.http.HeaderField | matlab.net.http.RequestMessage.send | matlab.net.http.RequestMessage.complete

Introduced in R2016b

getFields

Class: matlab.net.http.Message
Package: matlab.net.http

Return message header fields matching name or class

Syntax

```
[fields,indices] = getFields(messages,ids)
```

Description

`[fields,indices] = getFields(messages,ids)` returns fields and their indices in the messages that match the given IDs.

Input Arguments

`messages` — Messages

vector of `matlab.net.http.Message` objects

Messages, specified as a vector of `matlab.net.http.Message` objects.

Example: `getFields([msg1,msg2],'Date')`

`ids` — Names to match

strings | `matlab.net.http.HeaderField` objects | `meta.class` objects

Names to match, specified as one of the following.

- String vector, character vector, cell array of character vectors, or comma-separated list of strings or character vectors containing the names of the fields to return. Names are not case-sensitive.
- Vector or comma-separated list of one or more `matlab.net.http.HeaderField` objects whose `Name` properties are used to determine which fields to return. Names are not case-sensitive. Header field values in these objects are ignored.

- Vector or comma-separated list of `meta.class` objects that are subclasses of `HeaderField`.

  The `getFields` method searches for names that match names supported by the specified classes, regardless of the class. If a subclass does not have a specific set of supported names, all header fields of that subclass are matched regardless of their names. Call the `HeaderField.displaySubclasses` method to see supported names.

Example: `getFields(response,'Date','Content-Type')`

Output Arguments

`fields` — Fields matching input
array of `matlab.net.http.HeaderField` objects

Fields matching input, returned as an array of `matlab.net.http.HeaderField` objects. If no matches exist, `getFields` returns an empty `HeaderField` array. The name search is case-insensitive.

`indices` — Index values of fields
array of integers | `[]`

Index values of fields, returned as an array of integers, or `[]` if no match.

If `messages` is a vector, then `getFields` returns fields matching `ids` from all messages. `indices` is a cell array of vectors, where `indices{i}` contains the indices of the matching fields in `messages{i}`.

Examples

Verify Required Field Added to Request Message

Add a missing Date header field to a request message using the `RequestMessage.complete` method.

Create a request message to get text from the MathWorks website.

```
uri = matlab.net.URI('http://www.mathworks.com');
```

```
req = matlab.net.http.RequestMessage;
```

Verify the message contains a Date field. The date value reflects your system information. The value `indices{1} = []` indicates that `req` does not contain a Date field.

```
request = complete(req,uri);
[fields,indices] = getFields([req,request],?matlab.net.http.field.HTTPDateField)
```

```
fields = 
  DateField with properties:

     Name: "Date"
    Value: "Fri, 24 Feb 2017 17:47:43 GMT"


indices = 1×2 cell array
    []    [3]
```

See Also

See Also

matlab.net.http.HeaderField | matlab.net.http.HeaderField.displaySubclasses

Introduced in R2016b

removeFields

Class: matlab.net.http.Message
Package: matlab.net.http

Remove fields from message header

Syntax

```
msg = removeFields(msg,ids)
```

Description

`msg = removeFields(msg,ids)` removes all header fields matching `ids` and returns the updated message.

Input Arguments

`msg` — Message

`matlab.net.http.Message` object

Message, specified as a `matlab.net.http.Message` object.

`ids` — Names to match

strings | `matlab.net.http.HeaderField` objects | `meta.class` objects

Names to match, specified as one of the following.

- String vector, character vector, cell array of character vectors, or comma-separated list of strings or character vectors containing the names of the fields to remove. Names are not case-sensitive.
- Vector or comma-separated list of one or more `HeaderField` objects whose `Name` properties are used to determine which fields to remove. Names are not case-sensitive. Header field values are ignored.
- Vector or comma-separated list of `meta.class` objects that are subclasses of `HeaderField`.

The `removeFields` method searches for names that match names supported by the specified classes, regardless of the class. If a subclass does not have a specific set of supported names, all header fields of that subclass are matched regardless of their names. Call the `HeaderField.displaySubclasses` method to see supported names.

Example: `getFields(response,'Date','Content-Type')`

Examples

Remove Header Field from Request Message

Create a request message with two header fields, Cache-Control and Content-Type, and display the message.

```
import matlab.net.http.HeaderField

m = matlab.net.http.RequestMessage('get');
f1 = HeaderField('Cache-Control','no-store, no-cache');
f2 = HeaderField('Content-Type','text/html;charset=utf-8');
m = addFields(m,f1,f2);
show(m)
```

```
GET
Cache-Control: no-store, no-cache
Content-Type: text/html;charset=utf-8
```

Remove the Cache-Control field and display the updated message.

```
msg = removeFields(m,'Cache-Control');
show(msg)
```

```
GET
Content-Type: text/html;charset=utf-8
```

Remove Header Field Subclasses

The `MediaRangeField` class has two subclasses, `AcceptField` and `ContentTypeField`. An ID that specifies the `MediaRangeField` class matches all fields of class `MediaRangeField`, `AcceptField`, and `ContentTypeField`, plus any fields with the `Name` property `'Accept'` or `'Content-Type'`.

Create message `m` with a `ContentTypeField` header field.

```
m = matlab.net.http.RequestMessage('get');
f = matlab.net.http.HeaderField('Content-Type','text/html;charset=utf-8');
m = addFields(m,f);
```

Remove all header fields that are subclasses of the `MediaRangeField` class and display the updated message.

```
id = ?matlab.net.http.field.MediaRangeField;
msg = removeFields(m,id);
show(msg)
```

```
GET
```

See Also

See Also

matlab.net.http.HeaderField | matlab.net.http.HeaderField.displaySubclasses

Introduced in R2016b

show

Class: matlab.net.http.Message
Package: matlab.net.http

Display or return formatted version of message

Syntax

```
show(msg)
show(msg,maxlength)
```

```
str = show( ___ )
```

Description

`show(msg)` displays the whole message in the Command Window, including the `Header` and `Body` properties. If `Body` contains binary data that cannot be converted to characters, then the method displays a message indicating the length of the data in bytes.

Use this syntax for diagnostics or debugging.

`show(msg,maxlength)` displays the first `maxlength` characters of `Body`. If `Body` is longer than `maxlength` characters, then the method displays the total length of the data.

`str = show( ___ )` returns a string containing the information to be displayed, and can include any of the input arguments in previous syntaxes.

Input Arguments

`msg` — Message
`matlab.net.http.Message` object

Message, specified as a `matlab.net.http.Message` object or vector of `Message` objects.

`maxlength` — Number of bytes
integer

Number of bytes, specified as an integer to convert.

Examples

Show Contents of HTTP Request Message Containing Image Data

When a message body contains image/jpeg data, MATLAB displays the number of bytes in the image.

Send a message to the heritage.stsci.edu website requesting an image of Jupiter. Display the response message.

```
request = matlab.net.http.RequestMessage;
uri = matlab.net.URI('http://heritage.stsci.edu/2007/14/images/p0714aa.jpg');
r = send(request,uri);
show(r)
```

```
HTTP/1.1 200 OK
Date: Tue, 09 Aug 2016 19:58:56 GMT
Server: Apache/2.2.15  Red Hat  mod_ssl/2.2.15 OpenSSL/1.0.1e-fips Phusion_Passenger/4
Last-Modified: Thu, 08 Mar 2007 18:56:52 GMT
ETag: "1ca16a7-31265-42b2edeb90500"
Accept-Ranges: bytes
Content-Length: 201317
Connection: close
Content-Type: image/jpeg

<< 201317 bytes of image/jpeg data >>
```

Show 100 Characters of HTTP Message Content

Display the first 100 characters only of the body of a message from `mathworks.com`. MATLAB displays text indicating the total number of characters in the message body.

```
request = matlab.net.http.RequestMessage;
uri = matlab.net.URI('http://www.mathworks.com');
r = send(request,uri);
show(r,100)
```

```
HTTP/1.1 200 OK
Date: Thu, 11 Aug 2016 11:34:24 GMT
Server: MathworksServer_07
X-Powered-By: Servlet/3.0 JSP/2.2  MathworksServer_07 Java/Oracle Corporation/1.7
```

```
Cache-Control: no-store, no-cache, must-revalidate, post-check=0, pre-check=0
Pragma: no-cache
Expires: Mon, 10 Aug 2015 17:28:47 GMT
Content-Type: text/html;charset=utf-8
Via: 1.1 www.mathworks.com
Vary: Accept-Encoding
Transfer-Encoding: chunked
Connection: close


<!DOCTYPE HTML>
<html>
<head>
<title>MathWorks - Makers of MATLAB and Simulink</title>
<meta char

<< 45728 total characters of text/html UTF-8 data >>
```

See Also

See Also

matlab.net.http.Message.string

Introduced in R2016b

matlab.net.http.MessageBody class

Package: matlab.net.http

Body of HTTP message

Description

A `MessageBody` object contains the body of an HTTP message. In a request message, set the `Body` property to your data or to a `MessageBody` object containing your data. In a response message, this object contains the received data.

Message data is represented by two properties. The `Payload` property contains the raw bytes sent to or received from the network. The `Data` property contains the `Payload` as a MATLAB type. Often only one of these two properties is set.

Construction

`obj = matlab.net.http.MessageBody(data)` creates a message body with the Data property set to `data`.

Properties

`Data` — Message data

`uint8` vector or array | character array | string | structure array | image data | XML DOM | audio data | table

Message data, specified as one of the following MATLAB data types. For conversion details, see "HTTP Data Type Conversion".

- `uint8` vector — `Data` not converted.
- character array or scalar string — `Data` converted based on the media type and its charset attribute in the Content-Type header.
- structure array — `Data` converted to or from JSON string using `webread` and `webwrite`.

- image — `Data` converted to or from an image using `imread` and `imwrite`.
- XML DOM — `Data` converted to or from a string using `xmlread` and `xmlwrite`.
- audio data — `Data` converted using `audioread` and `audiowrite`.
- table — `Data` converted using `xmlread` and `xmlwrite`.
- Other type of array or cell array — `Data` converted to or from JSON using `jsonencode` and `jsondecode`.

In a request message, the `Data` property is the MATLAB data before conversion to a `uint8` payload. Data conversion happens when you call the `RequestMessage` `send` or `complete` methods. The conversion depends on the Content-Type you specify in the message and the type of `Data`. If you do not specify a Content-Type, then the `send` and `complete` methods try to deduce the type from the data and add the appropriate ContentTypeField to the request message.

In a response message, `Data` represents the `uint8` payload converted to a MATLAB type based on the Content-Type specified by the server. If conversion fails, then `Data` remains empty and the raw data appears in the `Payload` property.

To suppress automatic conversion of the response `Payload`, set the `HTTPOptions.ConvertResponse` property to `false`. In that case, `Data` contains either a string for character data or a `uint8` vector of bytes.

Attributes:

`Dependent`	`true`

`ContentType` — Content-Type of data (read-only)

`MediaType` object

Content-Type of the `Data` property, specified as a read-only `matlab.net.http.MediaType` object. This property determines how contents of the `Data` property was converted to or from the payload. If the Content-Type has a `MediaType` with a charset attribute, then the charset determines the encoding.

This property usually has the same values as the result of calling `convert` on the Content-Type field in the message containing this `MessageBody`.

You do not set `ContentType` in a request message. When you create a `MessageBody` object, this property is empty. When you copy `MessageBody` into a request message, `ContentType` is set to the value of the `ContentTypeField` in the message, if there is

one. The `RequestMessage` `send` and `complete` methods set `ContentType` based on the type of `Data` and the value of the `ContentTypeField` in the request message.

In a response message, `ContentType` is based on the `ContentTypeField` of the message.

Attributes:

`GetAccess`	`public`
`SetAccess`	`matlab.net.http.Message`

`ContentCoding` — Content-Encoding of payload (read-only)

string

This property is set to indicate that the `Payload` property of a `ResponseMessage` is encoded. When `ContentCoding` is set, no processing was done on the payload and the `Data` property is empty.

If MATLAB receives a message whose payload is encoded using a compression algorithm that it supports, such as `gzip` or `deflate`, it automatically decodes that payload before attempting any other conversions. If decoding was successful, it optionally stores the decoded payload in `Payload` and the converted payload (if any) in `Data`. In that case, this property is empty to indicate that the `Payload` is not encoded.

If the payload was encoded but decoding was not successful, or you suppressed decoding by setting the `HTTPOptions.DecodePayload` property to `false`, then the unprocessed still-encoded payload is returned in `Payload`, `Data` is left empty, and `ContentCoding` is set to a vector of strings representing the value of the Content-Encoding header field in the response message. In this case, you can save the `Payload` as is (for example, write it to a file), or process it according to the compression algorithms specified in `ContentCoding`. For example, if the value is `gzip`, you can write the data to a file and use the `gunzip` command to process the data.

Attributes:

`GetAccess`	`public`
`SetAccess`	`matlab.net.http.Message`

`Payload` — Raw bytes sent in message

empty (default) | `uint8` vector | scalar string | character vector

Raw bytes sent in a message, specified as a `uint8` vector, scalar string, or character vector. As a convenience in a request message, you can set `Payload` to a scalar string or character vector. MATLAB converts the value to a `uint8` vector. In a response message, `Payload` is always a `uint8` vector.

In a request message:

- A scalar string or character vector is converted using the charset specified in or implied by the `ContentType` property, if any, or the `UTF-8` encoding if none was set. To use a different encoding, encode it yourself, for example, using the `unicode2native` function, and assign the resulting `uint8` vector to `Payload`.
- If you do not want output conversion on the byte array, then set `Payload` instead of the `Data` property. If you set `Data` instead, then `Payload` is filled in with the bytes that were sent if you specify a request or history return argument for `RequestMessage.send`, in the return value of `RequestMessage.complete`, or in a `ResponseMessage` if you set the `HTTPOptions.SavePayload` property.
- When you set `Payload`, `Data` is cleared. If you send a message where both `Data` and `Payload` are set, then `Payload` is sent and `Data` is ignored. Only response messages and request messages returned by the `send` or `complete` methods can have both properties set at the same time.

In a response message, `Payload` is the raw bytes received in these cases:

- You specify a history return argument in the `RequestMessage.send` method.
- You set the `HTTPOptions.SavePayload` property to `true`.
- `Payload` is always set for messages appearing in a `LogRecord`
- If conversion of the payload to MATLAB data failed. For information, check the `HTTPException.History` property.

Attributes:

`Dependent`	`true`

Methods

char	Return message body as character vector
show	Display or return formatted version of message body data

string	Return message body as string

See Also

See Also

matlab.net.http.RequestMessage | matlab.net.http.ResponseMessage | matlab.net.http.MediaType | matlab.net.http.field.ContentTypeField | `imread` | `imwrite`

Topics

"HTTP Data Type Conversion"
Property Attributes

External Websites

RFC 2616, section 14.17 Content-Type

Introduced in R2016b

char

Class: matlab.net.http.MessageBody
Package: matlab.net.http

Return message body as character vector

Syntax

```
str = char(body)
```

Description

`str = char(body)` returns a message body `Data` property as a MATLAB character vector.

Input Arguments

`body` — Message body

`matlab.net.http.MessageBody` object

Message body, specified as a `matlab.net.http.MessageBody` object.

See Also

See Also

matlab.net.http.MessageBody.show | matlab.net.http.MessageBody.string

Introduced in R2016b

show

Class: matlab.net.http.MessageBody
Package: matlab.net.http

Display or return formatted version of message body data

Syntax

```
show(body)
show(body,maxlength)
```

```
str = show( ___ )
```

Description

`show(body)` displays the entire `Data` property of a message body if `Data` is a scalar string or character vector. For other types, the method displays a message indicating the length of the data in bytes, if known. If length is unknown, the value displayed is the length of the data if `body` were sent in a request message.

Use this method for diagnostics or debugging.

`show(body,maxlength)` displays the first `maxlength` characters of `Data`. If `Data` is longer than `maxlength` characters, then the method displays the total length of the data.

`str = show( ___ )` returns a string containing the information to be displayed, and can include any of the input arguments in previous syntaxes.

Input Arguments

`body` — Message body
`matlab.net.http.MessageBody` object

Message body, specified as a `matlab.net.http.MessageBody` object.

`maxlength` — Number of bytes
integer

Number of bytes to convert, specified as an integer.

Examples

Display Information About Image Data

Display data about an image received from the Hubble Heritage website.

```
req = matlab.net.http.RequestMessage;
uri = matlab.net.URI('http://heritage.stsci.edu/2007/14/images/p0714aa.jpg');
r = send(req,uri);
show(r.Body)
```

```
<< 201317 bytes of image/jpeg data >>
```

Display First 100 Characters of HTML Body

Request the MATLAB `webread` documentation from `mathworks.com`.

```
uri = matlab.net.URI('http://www.mathworks.com/help/matlab/ref/webread.html');
request = matlab.net.http.RequestMessage;
r = send(request,uri);
```

Display the first 100 characters of the message body.

```
show(r.Body,100)
```

```
<!DOCTYPE HTML>
<html>
<head>
<title>Read content from RESTful web service - MATLAB webread</title>


<< 78668 total characters of text/html UTF-8 data >>
```

See Also

See Also

matlab.net.http.MessageBody.string

Introduced in R2016b

string

Class: matlab.net.http.MessageBody
Package: matlab.net.http

Return message body as string

Syntax

```
str = string(body)
```

Description

`str = string(body)` returns a message body `Data` property as a string.

Use for diagnostics or debugging.

Input Arguments

`body` — Message body

`matlab.net.http.MessageBody` object

Message body, specified as a `matlab.net.http.MessageBody` object.

Example: `response.Body`

Output Arguments

`str` — Message body data

string

Message body data, returned as a string.

If the `Data` property contains text, then the method displays the entire contents. Use the `MessageBody.show` method to limit the amount of displayed text.

If `Data` does not contain text, then the method displays a message indicating the length of the data in bytes.

See Also

See Also

matlab.net.http.MessageBody.show

Introduced in R2016b

matlab.net.http.MessageType class

Package: matlab.net.http

HTTP message type

Description

The `MessageType` enumeration class identifies the message type.

Enumeration Member Name
`Request`
`Response`

Methods

These methods implement the equivalent MATLAB functionality for this class.

`char`	Message type as character vector
`string`	Message type as string

See Also

See Also

ProgressMonitor

Introduced in R2016b

parula

Parula colormap array

Syntax

```
c = parula
c = parula(m)
```

Description

`c = parula` returns the parula colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

Note: Starting in R2017a, the colors in this colormap are slightly different than in previous releases.

`c = parula(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface with the default parula colormap.

```
surf(peaks);
```

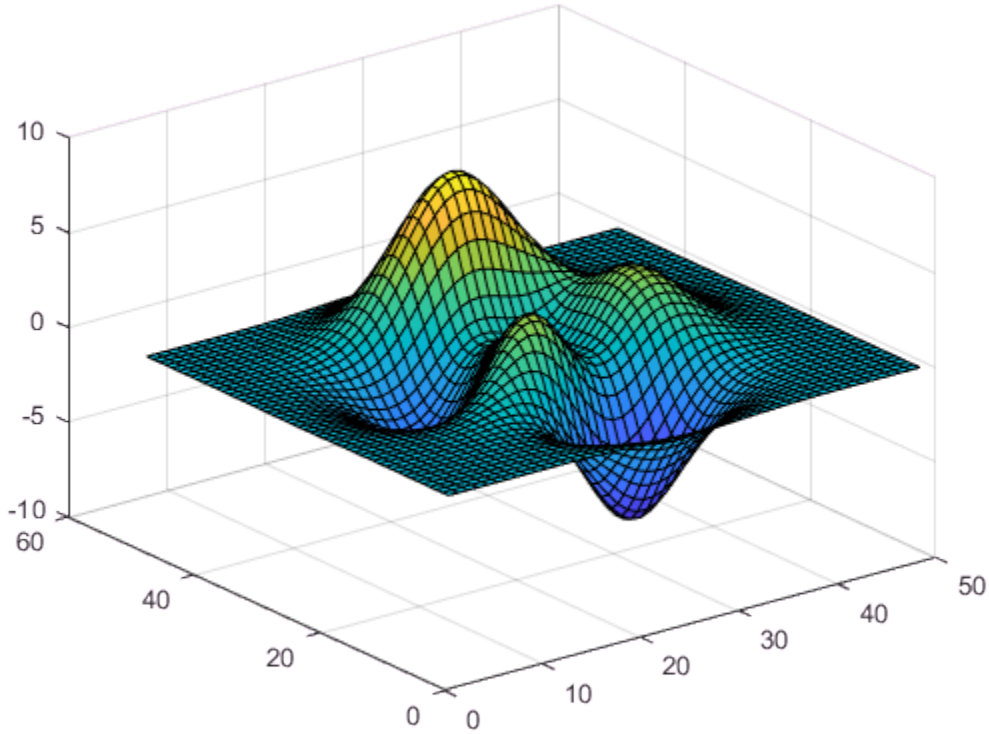

Get the parula colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = parula;
c = flipud(c);
colormap(c);
```

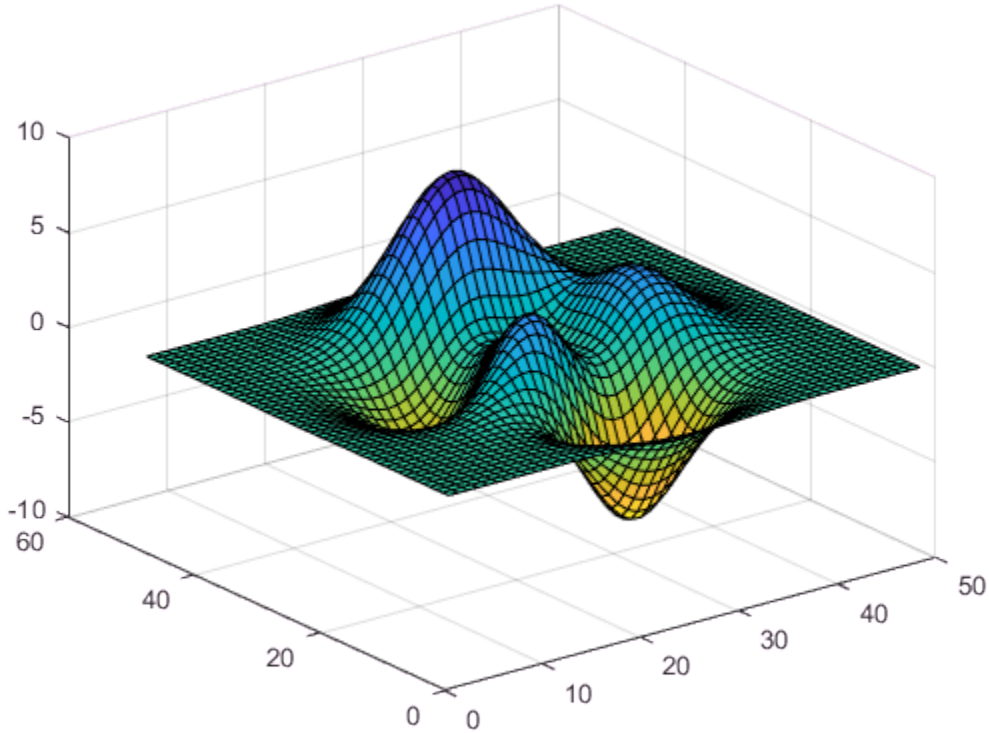

Downsample the Parula Colormap

Get a downsampled version of the parula colormap containing only ten colors. Then display the contours of the peaks function by applying the colormap and interpolated shading.

```
c = parula(10);
surf(peaks);
colormap(c);
shading interp;
```

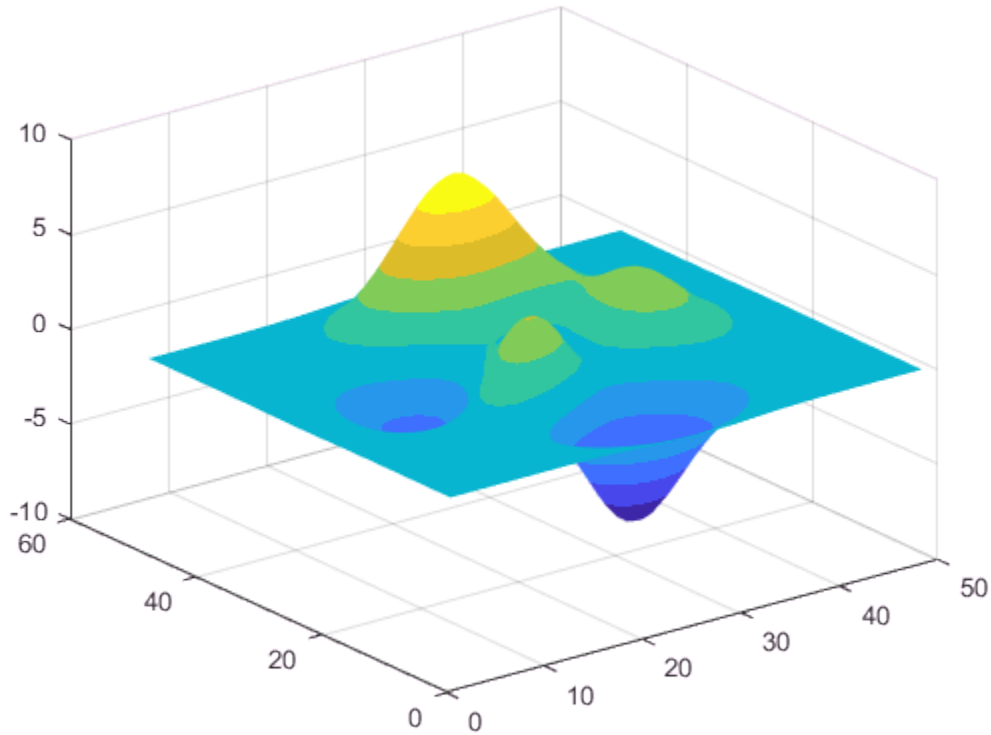

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced in R2014b

matlab.net.http.ProgressMonitor class

Package: matlab.net.http
Superclasses: handle

Progress monitor for HTTP message exchange

Description

Use the `ProgressMonitor` class to implement a progress monitor for an HTTP request message. A progress monitor listens to changes in the properties of this class to implement a display or update of your choice.

To implement a progress monitor, create a subclass of this class. Then create an `HTTPOptions` object, specify that subclass as the `ProgressMonitorFcn` property, and set the `UseProgressMonitor` property to `true`.

An HTTP request starts when you call the `RequestMessage.send` method. The process might involve multiple messages in both directions in the case of redirects and authentication. MATLAB calls the `done` method when all transfers have been completed.

During a transfer:

- MATLAB sets the `Max`, `CancelFcn`, and `Direction` properties when you call `RequestMessage.send`.
- MATLAB sets the `Value` property repeatedly as the body of the request message is sent to indicate the number of bytes transferred.
- When receipt of the `ResponseMessage` begins, MATLAB sets `Direction` to `Response` and again sets `Value` repeatedly.
- To cancel the transfer at any time, call the `CancelFcn` function. This action is the same as interrupting the `send` function in the Command Window.

You can display a graphical progress indicator or other indication of progress after `Direction` changes to `Response`. For each subsequent `Value`, update the indicator to the current `Value`. You can also use this mechanism to monitor progress programmatically.

Construction

`obj = matlab.net.http.ProgressMonitor(Name,Value)` creates a progress monitor with additional properties specified by one, or more name-value pair arguments. `Name` is the property name and `Value` is the corresponding value. You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`. Unspecified properties are set to their default values.

Properties

`Interval` — Seconds to first call and maximum interval between calls

2 seconds (default) | double

Seconds to first call and maximum interval between calls, specified as double.

`Interval` is the amount of time in seconds after the start of transfer before the first setting of the `Value` property. `Interval` is a suggested maximum amount of time between settings of `Value`, regardless of progress. If the total time to transfer the data is less than `Interval` seconds, then `Value` is not set. If no data has been transferred in `Interval` seconds since the last setting of `Value`, then `Value` might be set again to the same value. In this way, your `ProgressMonitor` object can cancel a transfer (by calling `CancelFcn`) even if there is no progress.

The `Interval` value is a suggested value. There is no guarantee that MATLAB sets `Value` within `Interval` seconds if there has been no progress.

The default interval is two seconds. To specify a different value, set `Interval` in your constructor. The minimum interval between consecutive settings of `Value` when there is no progress is 0.1 seconds. However, if `Value` changes, it might be set more often than this interval.

After setting `Value` the first time, there is no delay in setting `Value` for subsequent messages in the same exchange.

`InUse` — Monitor is in use indicator (read-only)

`true` | `false`

Monitor is in use indicator, specified as `true` or `false`. MATLAB sets this property to indicate whether it is using this `ProgressMonitor` object during a transfer. `InUse` prevents you from reusing this object for more than one transfer at a time.

Data Types: `logical`

`CancelFcn` — Function to call to cancel transfer (read-only)

function handle

Function to call to cancel a transfer, specified as a function handle. MATLAB sets `CancelFcn` to the function your `ProgressMonitor` should call to cancel a transfer. Calling this function has the same effect as interrupting the transfer in the Command Window.

`Max` — Maximum length of the transfer (read-only)

`uint64` | `[]`

Maximum length of the transfer, specified as `uint64`. If the maximum length is not known, `Max` is `[]`. `Max` is the maximum value for your displayed progress indicator.

MATLAB sets `Max` at the beginning of each send and receive operation to the expected number of bytes to be transferred, based on the Content-Length header field.

If the message does not contain a Content-Length field, `Max` is `[]`. In this case, you cannot determine the proportion of the transfer that has been completed. You can, however, still monitor changes in the `Value` property.

`Direction` — Direction of transfer

`matlab.net.http.MessageType` object | empty

Direction of transfer, specified as a `matlab.net.http.MessageType` object. MATLAB sets `Direction` to indicate whether progress is monitored for a request message or a response message. If no transfer is taking place, then `Direction` is empty.

`Value` — Number of bytes transferred so far

`uint64` | empty

Number of bytes transferred so far, specified as `uint64`. MATLAB sets `Value` repeatedly to the total number of bytes transferred for the current message. However, it delays setting this property the first time in an exchange until at least `Interval` seconds have elapsed since the start of the message.

Implement a `set.Value` method for this property to monitor progress of the transfer. You can also implement the ability to cancel the transfer from within the progress monitor in the `set.Value` method.

MATLAB might set `Value` to empty at the end of a given transfer, to indicate that transfer in the current direction has ended. MATLAB always sets `Value` to empty at the conclusion of all transfers before calling the `done` method.

You cannot control the frequency at which MATLAB updates the `Value` property. However, MATLAB might set `Value` at least once every `Interval` seconds, even if there is no progress. This behavior allows you to call the `CancelFcn` if a transfer is not progressing. `Value` might be zero if no bytes have been transferred for `Interval` seconds since transfer began.

Methods

done	Indicate all message transfers completed

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

Topics

"Display Progress Monitor for HTTP Message"

Introduced in R2016b

done

Class: matlab.net.http.ProgressMonitor
Package: matlab.net.http

Indicate all message transfers completed

Syntax

```
done(obj)
```

Description

`done(obj)` indicates that all message transfers are completed. MATLAB calls this method when all transfers for a given `RequestMessage.send` operation have been completed. This method indicates that MATLAB is no longer using the `ProgressMonitor` object. Use this method to delete windows or other objects you create to display progress.

See Also

Topics

"Display Progress Monitor for HTTP Message"

Introduced in R2016b

matlab.net.http.ProtocolVersion class

Package: matlab.net.http

HTTP protocol version

Description

If you use `'HTTP/1.1'`, you do not need to create a protocol version. To use a different protocol, use the `ProtocolVersion` class to create the protocol version and add it to the request line of a request message.

The server returns a `ProtocolVersion` object in the status line of a response message.

Construction

`obj = matlab.net.http.ProtocolVersion(name,major,minor)` creates the protocol version with the specified properties. This constructor enforces proper syntax of the parameters. For test purposes, create a `ProtocolVersion` object in a request message. Then use the `isequal` method to compare this value with the value returned by the server in the response message.

`obj = matlab.net.http.ProtocolVersion(str)` creates the version from `str`.

Input Arguments

`str` — Protocol version

string | character vector

Protocol version, specified as a string or a character vector acceptable to the `ProtocolVersion` constructor. `str` should have the syntax of name plus major and minor version numbers, but no error occurs if it does not.

Properties

`Name` — Protocol name

`HTTP` (default) | string | character vector

Protocol name, specified as a string or character vector.

Example: `'HTTP'`

Attributes:

`Dependent`	`true`

`Major` — Major version number

1 (default) | integer 0–9

Major version number, specified as an integer value from 0 through 9.

Example: `1`

Attributes:

`Dependent`	`true`

`Minor` — Minor version number

1 (default) | integer 0–9

Minor version number, specified as an integer value from 0 through 9.

Example: `1`

Attributes:

`Dependent`	`true`

Methods

These methods implement the equivalent MATLAB functionality for this class.

`isequal`	Uses case-insensitive compare.
`char`	Protocol version as character vector
`string`	Protocol version as string

Attributes

Sealed	true

Examples

Display Protocol Version in Response Message

Send an HTTP request message to `mathworks.com` using default values. Display the protocol version in the response message.

```
request = matlab.net.http.RequestMessage;
uri = matlab.net.URI('http://www.mathworks.com');
response = send(request,uri);
version = string(response.StatusLine.ProtocolVersion)
```

```
version =

  string

    "HTTP/1.1"
```

See Also

See Also

matlab.net.http.RequestLine | matlab.net.http.RequestMessage | matlab.net.http.ResponseMessage | matlab.net.http.StatusLine

Topics

Class Attributes
Property Attributes

Introduced in R2016b

matlab.net.http.RequestLine class

Package: matlab.net.http
Superclasses: matlab.net.http.StartLine

First line of HTTP request message

Description

The `RequestLine` class represents the first line of a request message. A request line is automatically created when you send or complete a message. You also can create a request line and pass it to the `RequestMessage.send` method in place of the URI argument.

Construction

`obj = matlab.net.http.RequestLine(method,requestTarget,protocolVersion)` creates a request line with the specified properties. You can omit trailing arguments and use `[]` to specify any placeholders.

`obj = matlab.net.http.RequestLine(str)` creates a request line by parsing `str`.

Input Arguments

`str` — Request line
string | character vector

Request line, specified as a string or character vector. `str` consists of 1-3 parts, separated by white space, specifying the Method, RequestTarget, and ProtocolVersion properties.

Properties

`Method` — Request method
`[]` (default) | `matlab.net.http.RequestMethod` enumeration | string | character vector

Request method, specified as a `matlab.net.http.RequestMethod` enumeration or a string or character vector representing a request method. To send a message, set the `RequestMessage.Method` property or the `RequestLine.Method` property.

Example: `'GET'`

Attributes:

`Dependent`	`true`

`ProtocolVersion` — Protocol version

`[]` (default) | `matlab.net.http.ProtocolVersion` object | string

Protocol version, specified as a `matlab.net.http.ProtocolVersion` object or a string acceptable to the constructor.

Example: `'HTTP/1.1'`

`RequestTarget` — Target URI

`matlab.net.URI` object | string | character vector

Target URI, specified as a `matlab.net.URI` object or a string or character vector acceptable to the constructor. The `RequestTarget` value must be consistent with the URI you specify in a request message `send` or `complete` method.

`RequestTarget` contains at least a leading forward slash (`/`) for the `Path` property, even if the path is relative or empty.

When using a proxy, `RequestTarget` is a full URI with `Scheme` and `Authority` properties. When not using a proxy, `RequestTarget` must be an absolute path with an optional `Query` property. You specify a proxy in an `HTTPOptions` object.

Example: `'http://heritage.stsci.edu/2007/14/images/p0714aa.jpg'`

Methods

These methods implement the equivalent MATLAB functionality for this class.

`char`	Request line as character vector
`string`	Request line as string

Examples

Create Request Line for Hubble Heritage Project Image

Create an HTTP request line to get an image from the Hubble Heritage Project website.

```
import matlab.net.http.RequestLine
url = 'http://heritage.stsci.edu/2007/14/images/p0714aa.jpg';
reqline = RequestLine('get',url,'HTTP/1.1');
string(reqline)
```

```
ans =
"GET http://heritage.stsci.edu/2007/14/images/p0714aa.jpg HTTP/1.1"
```

See Also

See Also

matlab.net.http.RequestMessage.send | matlab.net.http.RequestMessage.complete | matlab.net.URI | matlab.net.http.RequestMethod

Topics

Property Attributes

Introduced in R2016b

matlab.net.http.RequestMessage class

Package: matlab.net.http
Superclasses: matlab.net.http.Message

HTTP request message

Description

Use the `RequestMessage` class to format HTTP request messages to send to a server for processing. Use the `send` method to send the message, or the `complete` method to validate the message before sending. These methods fill in any necessary header fields and other message properties.

Construction

`obj = matlab.net.http.RequestMessage` creates a request message with default values. When you send or complete a message, the default `Method` property is `RequestMethod.GET`.

`obj = matlab.net.http.RequestMessage(method,header,body)` specifies one or more optional message properties. You can omit trailing arguments and use `[]` to specify any placeholders.

`obj = matlab.net.http.RequestMessage(requestLine,header,body)` sets the RequestLine property to `requestLine`. Use this syntax if you need control over the contents of the request line. For example, to send a message explicitly to a proxy, set the `RequestLine.RequestTarget` property to the full URI. Otherwise, MATLAB chooses the proxy based on your proxy settings, and the `send` method sets the `RequestTarget` to the `Path` property of the URI.

Properties

`RequestLine` — Request line

`matlab.net.http.RequestLine` object | string | character vector

Request line, specified as a `matlab.net.http.RequestLine` object or a string or character vector that contains the method, target, and protocol version. This line is automatically created when you send a message, based on the method and URI you specify. If you set this property explicitly, then its contents are used as the request line. The value might be set to a `RequestLine` object or to a string which is parsed and converted to a `RequestLine` object.

Example: `'GET HTTP/1.1'`

Attributes:

Dependent	true

`Method` — Request method

`[]` (default) | `matlab.net.http.RequestMethod` object | string | character vector

Request method, specified as a `matlab.net.http.RequestMethod` object, a string, a character vector, or empty (`[]`). To specify a method, set the `RequestMessage.Method` property or the `RequestLine.Method` property.

Example: `matlab.net.http.RequestMethod.CONNECT`

Example: `'get'`

Attributes:

Dependent	true
GetAccess	public
SetAccess	public

`Header` — Message header

`[]` (default) | `matlab.net.http.HeaderField` object

Message header, specified as a `matlab.net.http.HeaderField` object or a vector of `HeaderField` objects. When you set the `Header` property, MATLAB checks the fields of the header to ensure that they are appropriate for the message type. The `RequestMessage` `send` and `complete` methods fill in any required header fields for a properly formed request.

`Body` — Message body

`[]` (default) | `matlab.net.http.MessageBody` object

Message body, specified as a `matlab.net.http.MessageBody` object or data acceptable to the `MessageBody` constructor. By default, `Body` is empty (set to `[]`). A request message containing a `Body` property normally uses a method such as `'PUT'` or `'POST'`, not the default value `'GET'`, but this syntax is not enforced.

In a completed or received message, if the message has a `ContentTypeField` header field, then the `MessageBody.ContentType` property is set to that value. Otherwise, `ContentType` is unchanged or empty.

`Completed` — Whether message is complete

`false` (default) | `true`

Whether message is complete, specified as `true` or `false`. A `true` value means that the message was completed.

Methods that validate messages (`RequestMessage.send` and `RequestMessage.complete`) set the `Completed` property to `true` after:

- Determining that the message is valid.
- Completing processing, such as adding required header fields and converting the data.

If the property is true, then these methods do not modify the message, and the `send` method sends the message without checking it for validity. Any change to this message after that changes the `Completed` property back to `false`.

To send arbitrary headers and data in a request message, set `Completed` to `true` to prevent the `send` method from modifying the message. You can still use the `complete` method to validate the message, but the `send` method sends it whether it is valid.

If a request message contains data (the `Body.Data` property is not empty), then `Completed` is set to `true` only if `Body.Payload` contains the raw data. In a response message, the payload is set only if you specify the `HTTPOptions.SavePayload` property.

Attributes:

`Transient`	`true`

Data Types: `logical`

Methods

complete	Validate and complete HTTP request message without sending
send	Send HTTP request message and receive response

Attributes

`Sealed`	`true`

Examples

Create HTTP Request Message

Format an HTTP message requesting a server to add text to a website. This example only formats the message and does not send the data.

Add content to the message body.

```
data = 'Data to send';
body = matlab.net.http.MessageBody(data);
body.show
```

```
Data to send
```

Create a Content-Type header field describing the data type of the body.

```
contentTypeField = matlab.net.http.field.ContentTypeField('text/plain');
```

Create an Accept header field specifying the data types acceptable in the response message.

```
type1 = matlab.net.http.MediaType('text/*');
type2 = matlab.net.http.MediaType('application/json','q','.5');
acceptField = matlab.net.http.field.AcceptField([type1 type2]);
```

Create a request header containing the two header fields.

```
header = [acceptField contentTypeField];
```

Specify that this message is a PUT request.

```
method = matlab.net.http.RequestMethod.PUT;
```

Create the request message and display the contents.

```
request = matlab.net.http.RequestMessage(method,header,body);
show(request)
```

```
PUT
Accept: text/*, application/json; q=.5
Content-Type: text/plain

Data to send
```

See Also

See Also

matlab.net.http.ResponseMessage | matlab.net.http.RequestLine | matlab.net.http.RequestMethod | matlab.net.URI | matlab.net.http.MessageBody | `webread`

Topics

Class Attributes
Property Attributes

Introduced in R2016b

complete

Class: matlab.net.http.RequestMessage
Package: matlab.net.http

Validate and complete HTTP request message without sending

Syntax

```
[completedrequest,target] = complete(request,uri)
[completedrequest,target] = complete(request,uri,options)
```

Description

`[completedrequest,target] = complete(request,uri)` adds and validates message header fields and converts data like the `RequestMessage.send` method, but does not send the message.

Use the `complete` method to examine the contents of a request message for debugging purposes.

`[completedrequest,target] = complete(request,uri,options)` provides additional options for validating and completing the request message.

Input Arguments

`request` — Request message
`matlab.net.http.RequestMessage` object

Request message, specified as a `matlab.net.http.RequestMessage` object.

`uri` — Message destination
`matlab.net.URI` object | string | character vector

Message destination, specified as a `matlab.net.URI` object or a string or character vector acceptable to the constructor.

`options` — Additional options

`matlab.net.http.HTTPOptions` object

Additional options, specified as a `matlab.net.http.HTTPOptions` object, for processing request and response messages.

Output Arguments

`completedrequest` — Completed and validated request

`matlab.net.http.RequestMessage` object

Completed and validated request, returned as a `matlab.net.http.RequestMessage` object. The `Completed` property is true.

`target` — Completed URI

`matlab.net.URI` object

Completed URI, returned as a `matlab.net.URI` object.

Examples

Validate Request Message

Create a request message for a fictional website. Then, validate and complete the request without sending it.

```
request = matlab.net.http.RequestMessage();
url = 'myschool.edu/campus.jpg';
options = matlab.net.http.HTTPOptions('SavePayload',true);
[request,url] = complete(request,url,options);
show(request)
```

```
GET /campus.jpg HTTP/1.1
Host: myschool.edu
User-Agent: MATLAB/9.0.0.366741 (R2016b)
Date: Wed, 13 Jul 2016 17:21:08 GMT
Connection: close
```

MATLAB displays `User-Agent` and `Date` values relevant to your system.

Show the updated URL.

```
string(url)
```

```
ans = http://myschool.edu/campus.jpg
```

Limitations

- A completed request does not add any authorization header fields that might be needed for authentication to a server or proxy. It might not be possible to determine what the server requires without sending the message. To see what was sent in an authentication exchange, examine the `completedrequest` or `history` arguments returned by the send method.

Tips

- To send the same request message repeatedly, send `completedrequest`. Otherwise, if you send `request`, then MATLAB repeatedly validates the message. Also be sure to specify `target` as the URI and the same `options` input argument. Time-dependent header fields such as Date, which the `send` method adds, are not updated when sending `completedrequest`.
- To complete a message without converting the data, set the `Completed` property to `true` before calling the `complete` method. If `Completed` is `true`, then the `complete` method performs other actions but does not convert `Data` to `Payload`.

  This behavior differs from the `send` method. If `Payload` is empty, then the `send` method always converts a nonempty `Data` property, even if `Completed` is `true`.

See Also

See Also

matlab.net.http.RequestMessage.send | matlab.net.http.HTTPOptions | matlab.net.http.MessageBody | matlab.net.URI

Introduced in R2016b

send

Class: matlab.net.http.RequestMessage
Package: matlab.net.http

Send HTTP request message and receive response

Syntax

```
[response,completedrequest,history] = send(request,uri)
[response,completedrequest,history] = send(request,uri,options)
```

Description

`[response,completedrequest,history] = send(request,uri)` sends the `request` message to the web service specified by `uri` and returns the `response`, if any. If no `request.Method` property is specified, then the `send` method sets the property to `GET`.

By default, `send` verifies the semantic correctness of the headers and other parts of the message. The method fills in any required header fields for a properly formed request. If the header already contains a field that the method normally adds, then `send` verifies that the field has the expected value.

`[response,completedrequest,history] = send(request,uri,options)` provides additional options for processing the `request` and `response` messages.

Input Arguments

`request` — Request message

`matlab.net.http.RequestMessage` object

Request message, specified as a `matlab.net.http.RequestMessage` object.

`uri` — Message destination

`matlab.net.URI` object | string | character vector

Message destination, specified as a `matlab.net.URI` object or a string or character vector acceptable to the constructor.

`options` — Additional options
`matlab.net.http.HTTPOptions` object

Additional options, specified as a `matlab.net.http.HTTPOptions` object, for processing request and response messages.

Output Arguments

`response` — Message received from server
`matlab.net.http.ResponseMessage` object

Message received from a server, returned as a `matlab.net.http.ResponseMessage` object.

`completedrequest` — Request that was sent
`matlab.net.http.RequestMessage` object

Request that was sent before receiving the `response` argument, returned as a `matlab.net.http.RequestMessage` object. The `send` method augments the `completedrequest` argument with authentication or redirection information.

After sending an HTTP request, examine the `completedrequest` argument to see what was sent. The server might send multiple messages, for example, if there were redirections or an authentication exchange occurred. If there are multiple messages, then `completedrequest` contains the last request. To see the first, or intermediate messages, look at the `history` argument.

To send the same request multiple times, call the `RequestMessage.complete` method:

```
[completedrequest,target] = complete(request,uri)
```

Then, call the `send` method with these output arguments:

```
resp = send(completedrequest,target)
```

`history` — Log of messages
vector of `matlab.net.http.LogRecord` objects

Log of messages, returned as a vector of `matlab.net.http.LogRecord` objects that were exchanged to satisfy this `send` request. If you have a single request and response, then the `history` argument contains one record. In the case of an authentication containing multiple messages, the history can contain multiple log records for each redirection.

Use the history to obtain all Set-Cookie headers from response messages. You can send these headers back to the server in subsequent requests.

The last record in the history contains the same properties as the `completedrequest` and `response` arguments, except for the `Body` property. To log message bodies, specify the `SavePayload` property in the `options` argument.

The history also can be useful for debugging.

Examples

Send HTTP Message

Send an HTTP message to read the MathWorks Contact Support web page and display the message status code.

```
import matlab.net.*
import matlab.net.http.*
r = RequestMessage;
uri = URI('http://www.mathworks.com/support/contact_us');
resp = send(r,uri);
status = resp.StatusCode
```

```
status =

    OK
```

Do Not Allow HTTP Message Redirects

Prevent message redirects from `mathworks.com` website by setting the HTTP option `MaxRedirects` to zero. Then display status code information.

```
import matlab.net.*
import matlab.net.http.*
```

```
r = RequestMessage;
uri = URI('http://www.mathworks.com/support/contact_us');
options = HTTPOptions('MaxRedirects',0);
[resp,~,hist] = send(r,uri,options);
status = getReasonPhrase(resp.StatusCode)
```

```
status =

  1×17 char array

Moved Permanently
```

Error Handling

Always check the `response` `Status` property to determine whether the request was accepted. Error conditions are:

- `MException` — Message is not well formed and cannot be completed.
- `HTTPException` — Message is completed, but the web service is unreachable or does not respond within the timeout period specified in `options`.
- `Status` property of `response` — Web service responds and returns an HTTP error status. `send` returns normally, setting the `Status` property to the error returned from the server.

Tips

- You can override the default behavior as follows:
  - To send a message as is without any checking or alteration of the header, set the `Completed` property for `request` to `true`.
  - To suppress adding a particular header field, add that field to the `request` header with an empty value. Header fields with empty values are not included in the message.
  - To override the value that the `send` method adds for a given header field, add a `matlab.http.field.GenericField` to the header with the name and value you want to use.

See Also

See Also

matlab.net.http.RequestMessage.complete | matlab.net.http.HTTPOptions | matlab.net.http.HTTPException | matlab.net.http.LogRecord | matlab.net.http.field.GenericField | matlab.net.URI

Introduced in R2016b

matlab.net.http.RequestMethod class

Package: matlab.net.http

HTTP request method

Description

The `RequestMethod` enumeration class provides identifiers for request methods. Use these values for the `Method` property in a request message.

Enumeration Member Name
ACL
BASELINECONTROL
BIND
CHECKIN
CHECKOUT
CONNECT
COPY
DELETE
GET
HEAD
LABEL
LINK
LOCK
MERGE
MKACTIVITY
MKCALENDAR
MKCOL
MKREDIRECTREF

Enumeration Member Name
MKWORKSPACE
MOVE
OPTIONS
ORDERPATCH
PATCH
POST
PRI
PROPFIND
PROPPATCH
PUT
REBIND
REPORT
SEARCH
TRACE
UNBIND
UNCHECKOUT
UNLINK
UNLOCK
UPDATE
UPDATEREDIRECTREF
VERSIONCONTROL

Methods

These methods implement the equivalent MATLAB functionality for this class.

char	Request method as character vector
string	Request method as string

Examples

Display Method for Default Request Message

```
r = matlab.net.http.RequestMessage;
uri = 'http://www.mathworks.com';
r = complete(r,uri);
reqmethod = r.Method
```

```
reqmethod =
GET
```

See Also

See Also

matlab.net.http.RequestMessage

External Websites

Hypertext Transfer Protocol (HTTP) Method Registry

Introduced in R2016b

matlab.net.http.ResponseMessage class

Package: matlab.net.http
Superclasses: matlab.net.http.Message

HTTP response message

Description

The `ResponseMessage` class formats HTTP response messages returned by a server. The `RequestMessage.send` method creates a response message.

Properties

`StatusLine` — Status line from server

`StatusLine` object

Status line from server, specified as a `matlab.net.http.StatusLine` object.

Attributes:

`Dependent`	`true`

`StatusCode` — HTTP status code

`StatusCode` object

HTTP status code, specified as a `matlab.net.http.StatusCode` object. Same as the `StatusLine.StatusCode` property.

Attributes:

`Dependent`	`true`
`GetAccess`	`public`
`SetAccess`	`immutable`

`Header` — Message header

`[]` (default) | `matlab.net.http.HeaderField` object

Message header, specified as a `matlab.net.http.HeaderField` object or a vector of `HeaderField` objects. When you set the `Header` property, MATLAB checks the fields of the header to ensure that they are appropriate for the message type. The `RequestMessage` `send` and `complete` methods fill in any required header fields for a properly formed request.

`Body` — Message body

`[]` (default) | `matlab.net.http.MessageBody` object

Message body, specified as a `matlab.net.http.MessageBody` object or data acceptable to the `MessageBody` constructor. By default, `Body` is empty (set to `[]`). A request message containing a `Body` property normally uses a method such as `'PUT'` or `'POST'`, not the default value `'GET'`, but this syntax is not enforced.

In a completed or received message, if the message has a `ContentTypeField` header field, then the `MessageBody.ContentType` property is set to that value. Otherwise, `ContentType` is unchanged or empty.

`Completed` — Whether message is completed

`false` (default) | `true`

Whether message is completed, specified as `true` or `false`. A `true` value means that the message was completed. Methods that return messages set the `Completed` property to `true` when:

- The `Body` or `Body.Data` properties are empty.
- The `Body.Payload` property contains the raw data.

Attributes:

`Transient`	`true`

Data Types: `logical`

Methods

complete	Process or reprocess response payload Content-Type

Attributes

Sealed	true

Examples

Request Image from Website

Send a message to the Hubble Heritage website requesting an image of Jupiter.

Format an HTTP request message and display the Content-Type of the response message body. The server returns a JPEG image.

```
request = matlab.net.http.RequestMessage;
uri = matlab.net.URI('http://heritage.stsci.edu/2007/14/images/p0714aa.jpg');
r = send(request,uri);
r.Body.ContentType
```

```
ans =

  MediaType with properties:

          Type: "image"
       Subtype: "jpeg"
    Parameters: []
     MediaInfo: "image/jpeg"
        Weight: []
```

Display the image using the `imshow` function. MATLAB resizes the image to fit on the screen.

```
warning('off','Images:initSize:adjustingMag');
imshow(r.Body.Data)
```

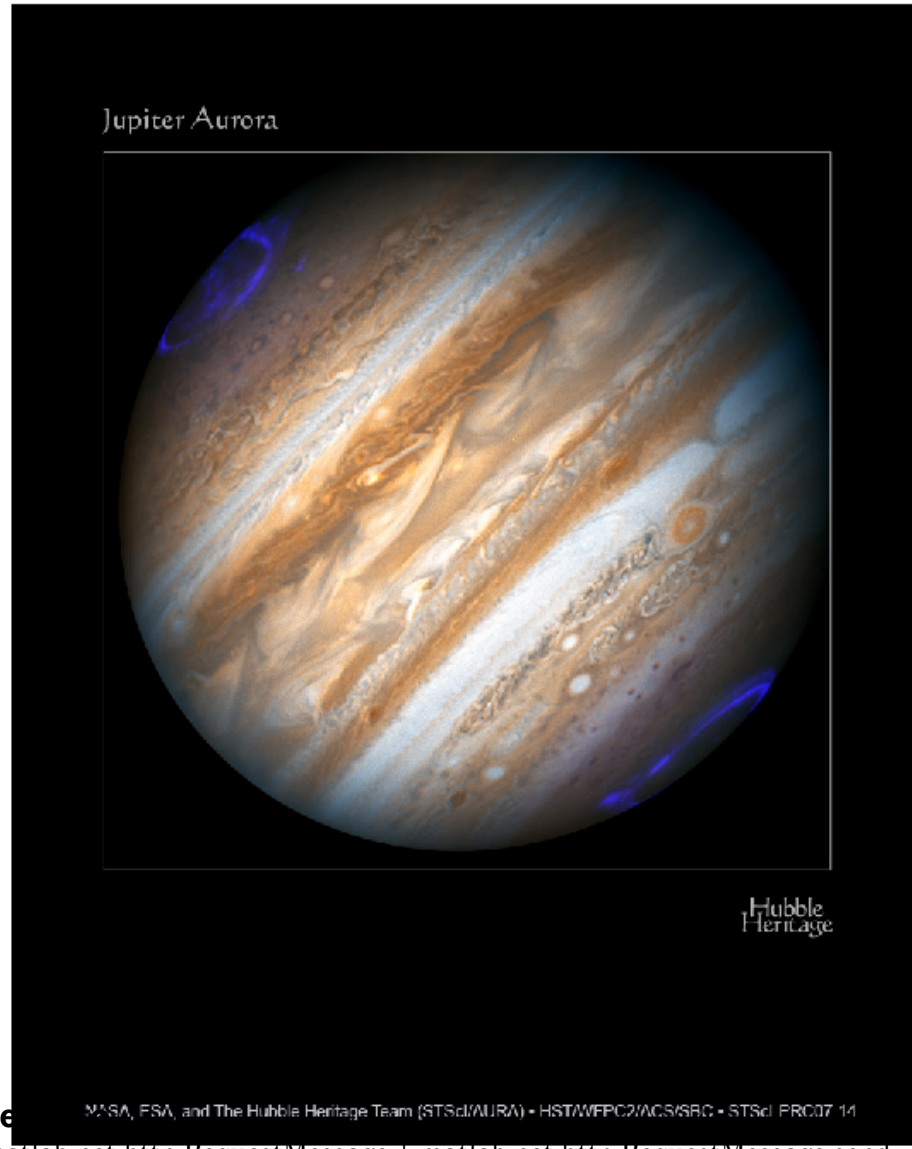

See Also

matlab.net.http.RequestMessage | matlab.net.http.RequestMessage.send | matlab.net.http.StatusLine | matlab.net.http.StatusCode | matlab.net.http.MessageBody

Topics

Class Attributes
Property Attributes

Introduced in R2016b

complete

Class: matlab.net.http.ResponseMessage
Package: matlab.net.http

Process or reprocess response payload Content-Type

Syntax

```
msg = complete(msg)
```

Description

`msg = complete(msg)` converts the `msg.Body.Payload` property to `msg.Body.Data` using the current value of the Content-Type header field in `msg`.

Use the `complete` method when:

- `Body.Data` was unset or not set properly because the server inserted the wrong Content-Type in the message or the Content-Type was missing.
- You set the `HTTPOptions.ConvertResponse` property to `false` to prevent conversion of the data when it was originally received.

If there was an exception processing the received message, or if you set the `HTTPOptions.SavePayload` property when you sent the request, the `Body.Payload` in this response message contains the original payload (if any). In this case, modify the header of this message to add or correct the Content-Type field. Then call the `complete` method to process the response as if the server had inserted that Content-Type field originally. The result is new contents in `Body.Data`.

If `Body.Payload` is set, this method ignores the current value of `Body.Data` and processes that payload based on Content-Type. This case occurs for a conversion error or if you specified `SavePayload`. But if conversion of the incoming data succeeded originally, but was incorrect, `Body.Data` is set and `Body.Payload` might be empty. In this case, change the ContentTypeField in the received message to the desired type and then call this method. `complete` attempts to convert the data back to a payload based on the `Body.ContentType` property used to convert it originally. Then it is reconverted

using the new Content-Type header in the response message. If `Data` is not empty, then the returned `Body.Payload` is set.

If you specified `SavePayload` when sending the message, `complete` uses the original payload that was preserved in `Body.Payload` instead, with no loss of information.

If the `Completed` property is set, `complete` does nothing. In a message that contains a `Body`, this property is normally set only if `msg.Body.Payload` has been set.

Input Arguments

`msg` — Response message
`matlab.net.http.ResponseMessage` object

Response message, specified as a `matlab.net.http.ResponseMessage` object.

Output Arguments

`msg` — Completed response message
`matlab.net.http.ResponseMessage` object

Completed response message, returned as a `matlab.net.http.ResponseMessage` object.

Examples

Convert a `text/plain` Content-Type Field

Assume that the server returned a response containing a JSON string but specified a Content-Type field of `text/plain` instead of `application/json`. In this case, `Body.Payload` is empty and `msg.Body.Data` contains an ASCII string (since the default charset for `text/plain` is `us-ascii`). To process this data and obtain a JSON structure:

```
response = response.changeFields('Content-Type','application/json');
response = response.complete();
data = response.Body.Data;
```

The call to `complete` converts `Body.Data` to `Body.Payload` using `us-ascii` encoding. The method then reconverts `Body.Payload` to `utf-8` before processing it as a JSON string and storing the result in `Body.Data`. This conversion does not retain any non-ASCII characters that were garbled when converting the original payload using `text/plain` but preserves the original ASCII data.

See Also

Introduced in R2016b

matlab.net.http.StartLine class

Package: matlab.net.http

First line of HTTP message

Description

The `StartLine` class is an abstract class used as a base class for creating `matlab.net.http.RequestLine` and `matlab.net.http.StatusLine` elements.

Methods

These methods implement the equivalent MATLAB functionality for this class.

`char`	Start line as character vector as it would appear in first line of HTTP message
`string`	Start line as string

See Also

See Also

matlab.net.http.RequestLine | matlab.net.http.StatusLine

Introduced in R2016b

matlab.net.http.StatusClass class

Package: matlab.net.http

Status class of HTTP response

Description

The `StatusClass` enumeration class provides identifiers for status classes.

Numeric Representation	Enumeration Member Name
100	`Informational`
200	`Successful`
300	`Redirection`
400	`ClientError`
500	`ServerError`

Methods

getReasonPhrase	StatusClass name as text phrase

See Also

See Also

matlab.net.http.StatusCode

Introduced in R2016b

getReasonPhrase

Class: matlab.net.http.StatusClass
Package: matlab.net.http

StatusClass name as text phrase

Syntax

```
meaning = getReasonPhrase(class)
```

Description

`meaning = getReasonPhrase(class)` returns the status class name as an English-language string with spaces between words.

Input Arguments

`class` — Status class
`matlab.net.http.StatusClass` object

Status class, specified as a `matlab.net.http.StatusClass` object.

Examples

Display HTTP Status Code Category

Send a message to `mathworks.com` and display the status code category.

```
uri = matlab.net.URI('http://www.mathworks.com');
req = matlab.net.http.RequestMessage;
resp = send(req, uri);
sc = getClass(resp.StatusCode);
disp(getReasonPhrase(sc))
```

`Successful`

See Also

See Also

matlab.net.http.StatusLine | matlab.net.http.ResponseMessage

Introduced in R2016b

matlab.net.http.StatusCode class

Package: matlab.net.http

Status code in HTTP response

Description

The `StatusCode` enumeration class provides identifiers for status codes.

Integer Representation	Enumeration Member Name	Integer Representation	Enumeration Member Name	Integer Representation	Enumeration Member Name
100	Continue	400	BadRequest	500	InternalServerError
101	SwitchingPro	401	Unauthorized	501	NotImplemented
102	Processing	402	PaymentRequire	502	BadGateway
		403	Forbidden	503	ServiceUnavailable
200	OK	404	NotFound	504	GatewayTimeout
201	Created	405	MethodNotAllow	505	HTTPVersionNotSupported
202	Accepted	406	NotAcceptable	506	VariantAlsoNegotiates
203	NonAuthorita	407	ProxyAuthentic	507	InsufficientStorage
204	NoContent	408	RequestTimeout	508	LoopDetected
205	ResetContent	409	Conflict	509	Unassigned
206	PartialConte	410	Gone	510	NotExtended
207	MultiStatus	411	LengthRequired	511	HTTPVersionNotSupported
208	AlreadyRepor	412	PreconditionFa		
226	IMUsed	413	PayloadTooLarg		
		414	URITooLong		
300	MultipleChoi	415	UnsupportedMed		
301	MovedPermane	416	RangeNotSatisf		
302	Found	417	ExpectationFai		

Integer Representation	Enumeration Member Name	Integer Representation	Enumeration Member Name	Integer Representation	Enumeration Member Name
303	SeeOther	421	MisdirectedReq		
304	NotModified	422	UnprocessableE		
305	UseProxy	423	Locked		
306	SwitchProxy	424	FailedDependen		
307	TemporaryRed	426	UpgradeRequire		
308	PermanentRed	428	PreconditionRe		
		429	TooManyRequest		
		431	RequestHeaderF		

Methods

fromValue	Create StatusCode object from string or number
getClass	StatusClass for StatusCode
getReasonPhrase	StatusCode identifier as text phrase

These methods implement the equivalent MATLAB functionality for this class.

`char`	Name of status code as character vector
`string`	Three-digit value of status code as string

Examples

Display HTTP Error Code Information

Use the status code to provide error information.

Send a PUT message to the `mathworks.com` website.

```
uri = matlab.net.URI('http://www.mathworks.com');
```

```
header = matlab.net.http.field.ContentTypeField('text/plain');
req = matlab.net.http.RequestMessage('put',header,'Data');
resp = send(req, uri);
```

The website does not allow PUT methods. Display a user-friendly message.

```
sc = resp.StatusCode;
if sc ~= matlab.net.http.StatusCode.OK
    disp([getReasonPhrase(getClass(sc)),': ',getReasonPhrase(sc)])
    disp(resp.StatusLine.ReasonPhrase)
end
```

```
Client Error: Method Not Allowed
HTTP method PUT is not supported by this URL
```

How to Choose a Status Code Conversion Method

The `StatusCode` methods - `char`, `string`, `getReasonPhrase`, and `getClass` - provide information about the code and its meaning. Choose a method based on your requirements.

Suppose that your response message contains status code 307. To run this example, create the code.

```
sc = matlab.net.http.StatusCode(307);
```

Use the `char` and the `getReasonPhrase` methods to return text for the status code meaning. The `getReasonPhrase` method creates a phrase you can use in messages.

```
txt = char(sc)
```

```
txt =
'TemporaryRedirect'
```

```
msg = getReasonPhrase(sc)
```

```
msg =
'Temporary Redirect'
```

Use the `string` method to return the integer value of the status code as a string.

```
value = string(sc)
```

```
value =
"307"
```

If your code processes status codes based on status class, use the `getClass` method.

```
class = getClass(sc)
```

```
class =
Redirection
```

Display All HTTP Status Codes

```
enumeration matlab.net.http.StatusCode
```

```
Enumeration members for class 'matlab.net.http.StatusCode':

    Continue
    SwitchingProtocols
    Processing
    OK
    Created
    Accepted
    NonAuthoritativeInformation
    NoContent
    ResetContent
    PartialContent
    MultiStatus
    AlreadyReported
    IMUsed
    MultipleChoices
    MovedPermanently
    Found
    SeeOther
    NotModified
    UseProxy
    SwitchProxy
    TemporaryRedirect
    PermanentRedirect
    BadRequest
    Unauthorized
    PaymentRequired
    Forbidden
    NotFound
    MethodNotAllowed
    NotAcceptable
    ProxyAuthenticationRequired
    RequestTimeout
```

```
Conflict
Gone
LengthRequired
PreconditionFailed
PayloadTooLarge
URITooLong
UnsupportedMediaType
RangeNotSatisfiable
ExpectationFailed
MisdirectedRequest
UnprocessableEntity
Locked
FailedDependency
UpgradeRequired
PreconditionRequired
TooManyRequests
RequestHeaderFieldsTooLarge
InternalServerError
NotImplemented
BadGateway
ServiceUnavailable
GatewayTimeout
HTTPVersionNotSupported
VariantAlsoNegotiates
InsufficientStorage
LoopDetected
Unassigned
NotExtended
NetworkAuthenticationRequired
```

See Also

See Also

matlab.net.http.ResponseMessage | matlab.net.http.StatusClass

Introduced in R2016b

matlab.net.http.StatusCode.fromValue

Class: matlab.net.http.StatusCode
Package: matlab.net.http

Create StatusCode object from string or number

Syntax

```
code = matlab.net.http.StatusCode.fromValue(value)
```

Description

`code = matlab.net.http.StatusCode.fromValue(value)` converts `value` to a `StatusCode` enumeration. Use this method to create a `StatusCode` object for comparisons.

Input Arguments

`value` — Number to convert
positive integer | positive integer string

Number to convert, specified as a positive integer or a positive integer string.

Attributes

`Static`	`true`

Examples

Compare Response Status with Code from External Source

Compare a response status code with a value from an external source that lists status codes as numbers or strings.

Assume that you have the status code from a response message.

```
class(resp.StatusCode)
```

```
ans = matlab.net.http.StatusCode
```

Compare the code with value `401` from the table using the `fromValue` method.

```
theValue = '401';
if resp.StatusCode == matlab.net.http.StatusCode.fromValue(theValue)
    % do something
end
```

See Also

Topics

Method Attributes

Introduced in R2016b

getClass

Class: matlab.net.http.StatusCode
Package: matlab.net.http

StatusClass for StatusCode

Syntax

```
class = getClass(code)
```

Description

`class = getClass(code)` converts status code to `matlab.net.http.StatusClass` object.

Input Arguments

`code` — Status code
`matlab.net.http.StatusCode` object

Status code, specified as a `matlab.net.http.StatusCode` object.

Examples

Display Class for HTTP Status Code 503

```
sc = matlab.net.http.StatusCode(503);
res = getClass(sc)
```

```
res =
ServerError
```

See Also

See Also

matlab.net.http.StatusClass

Introduced in R2016b

getReasonPhrase

Class: matlab.net.http.StatusCode
Package: matlab.net.http

StatusCode identifier as text phrase

Syntax

```
meaning = getReasonPhrase(code)
```

Description

`meaning = getReasonPhrase(code)` returns the status code identifier as a string (English only) with punctuation and spacing added. The meaning is based on the numeric code. `meaning` is not necessarily the same as the `ReasonPhrase` property that the server inserts into the status line of a response message.

Input Arguments

`code` — Status code
`matlab.net.http.StatusCode` object

Status code, specified as a `matlab.net.http.StatusCode` object.

Examples

Display Meaning of HTTP Status Code

```
sc = matlab.net.http.StatusCode(500);
res = getReasonPhrase(sc)
```

```
res =
'Internal Server Error'
```

See Also

See Also

matlab.net.http.StatusLine

Introduced in R2016b

matlab.net.http.StatusLine class

Package: matlab.net.http
Superclasses: matlab.net.http.StartLine

First line of HTTP response message

Description

The server inserts a `StatusLine` object into every HTTP response message. For information about a status line, see RFC 7230 Status Line, section 3.1.2.

Construction

`obj = StatusLine(protocolVersion,statusCode,reasonPhrase)` creates a status line with the specified properties. Use constructors for testing.

`obj = StatusLine(str)` creates a status line by parsing `str`.

Input Arguments

`str` — Status line

string | character vector

Status line, specified as a string or character vector.

Properties

`ProtocolVersion` — HTTP version

`[]` (default) | `matlab.net.http.ProtocolVersion` object | string

HTTP version, specified as a `matlab.net.http.ProtocolVersion` object or a string acceptable to its constructor.

Example: `'HTTP/1.1'`

Attributes:

`Dependent`	`true`

`StatusCode` — Status code

`matlab.net.http.StatusCode` enumeration | string | integer

Status code, specified as a `matlab.net.http.StatusCode` enumeration, string, or integer. The value is a `StatusCode` object if the server returns one of its enumeration values. If the server returns a number, then the value is an integer.

Attributes:

`Dependent`	`true`

`ReasonPhrase` — Reason phrase from server

string

Reason phrase from server, specified as a string. `ReasonPhrase` is empty if the server does not provide a reason. This value is not necessarily the same as the value returned by the `StatusCode.getReasonPhrase` method.

Attributes:

`Dependent`	`true`

Methods

These methods implement the equivalent MATLAB functionality for this class.

`char`	Status line as character vector
`string`	Status line as string

See Also

See Also

matlab.net.http.StatusCode.getReasonPhrase | matlab.net.http.ProtocolVersion | matlab.net.http.StatusCode

Topics

Property Attributes

External Websites

RFC 7230 Status Line, section 3.1.2

Introduced in R2016b

matlab.net.http.field

Summary of header field classes in MATLAB HTTP interface

Description

The `matlab.net.http.field` package consists of the following classes and packages:

matlab.net.http.field.AcceptField	HTTP Accept header field
matlab.net.http.field.AuthenticateField	HTTP WWW-Authenticate or Proxy-Authenticate header field
matlab.net.http.field.AuthenticationInfoField	HTTP Authentication-Info header field in response message
matlab.net.http.field.AuthorizationField	HTTP Authorization or Proxy-Authorization header field
matlab.net.http.field.ContentLengthField	HTTP Content-Length field
matlab.net.http.field.ContentLocationField	HTTP Content-Location header field
matlab.net.http.field.ContentTypeField	HTTP Content-Type header field
matlab.net.http.field.CookieField	HTTP Cookie header field
matlab.net.http.field.DateField	HTTP Date header field
matlab.net.http.field.GenericField	HTTP header field with any name and value
matlab.net.http.field.HTTPDateField	HTTP header field containing date

matlab.net.http.field.IntegerField	Base class for HTTP header fields containing nonnegative integers
matlab.net.http.field.LocationField	HTTP Location header field
matlab.net.http.field.MediaRangeField	Base class for HTTP Content-Type and Accept header fields
matlab.net.http.field.SetCookieField	HTTP Set-Cookie header field
matlab.net.http.field.URIReferenceField	Base class for HTTP header fields containing URI components

See Also

Introduced in R2016b

matlab.net.http.field.AcceptField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField, matlab.net.http.field.MediaRangeField

HTTP Accept header field

Description

The `AcceptField` is an HTTP header field in a request message. The field contains one or more media type specifications indicating the type of content acceptable to the client.

Construction

`obj = matlab.net.http.field.AcceptField(value)` creates an Accept header field with the Value property set to `value`.

Use an Accept field if the server can return different `MediaType` objects and you want to receive only certain types. If you do not specify an Accept field, the server might assume that you are willing to receive any type.

Properties

`Name` — Header field name

`'Accept'`

Header field name, specified as `'Accept'`.

`Value` — Media type

vector of `matlab.net.http.MediaType` objects | vector of strings | cell array of character vectors

Media type, specified as a vector of `matlab.net.http.MediaType` objects, a vector of strings, or a cell array of character vectors. All strings must be acceptable to the `MediaType` constructor. Each `Value` represents a media type containing an optional quality (`'q'`) parameter.

Example: `MediaType('application/json','q','.5')`

Methods

`convert`	Return `Value` of `AcceptField` as vector of `MediaType` objects

Attributes

`Sealed`	`true`

See Also

See Also

matlab.net.http.MediaType | matlab.net.http.RequestMessage | matlab.net.http.ResponseMessage

Topics

Class Attributes

External Websites

RFC 7231 Semantics and Content, section 5.3.2 Accept

Introduced in R2016b

convert

Class: matlab.net.http.field.DateField
Package: matlab.net.http.field

Return value of field as array of MATLAB `datetime` objects

Syntax

```
value = convert(field)
```

Description

`value = convert(field)` converts the value of a date field to a MATLAB `datetime` object.

Input Arguments

`field` — Date header field

`matlab.net.http.field.DateField` object

Date header field, specified as a `matlab.net.http.field.DateField` object.

See Also

Introduced in R2016b

matlab.net.http.field.AuthenticateField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField

HTTP WWW-Authenticate or Proxy-Authenticate header field

Description

An `AuthenticateField` contains one or more challenges from a server asking for authentication information. A server or proxy creates an `AuthenticateField` in a response message.

When you send a request message to a server or through a proxy that requires authentication, MATLAB automatically tries to authenticate to the server or proxy when:

- `HTTPOptions.Authenticate` property is true (default)
- `HTTPOptions.Credentials` property contains the necessary names and passwords.

If authentication is successful, the response message returns an `OK` status and does not contain an authentication field.

A response message returns an authentication field if you disable authentication or if authentication failed. In that case, the status code of the response message is either 401 (`Unauthorized`) or 407 (`ProxyAuthenticationRequired`). Examine the `AuthInfo` object and respond by adding the appropriate `AuthorizationField` to the request message containing your credentials. Or resend the request by setting the correct `Credentials` property in `HTTPOptions`.

If the server or proxy requires an authentication scheme that MATLAB does not support, you must implement the authentication protocol yourself. Create a request message with the appropriate credentials and other information.

Construction

`obj = matlab.net.http.field.AuthenticateField(name,value)` creates an authentication header field with the Name property set to `name` and the Value property

set to `value`. A server creates this field in a response message. Use this constructor for test purposes.

Properties

`Name` — Header field name

`'WWW-Authenticate'` | `'Proxy-Authenticate'`

Header field name, specified as `'WWW-Authenticate'` or `'Proxy-Authenticate'`.

`Value` — Challenges

vector of `AuthInfo` objects | string

A comma-separated list of challenges, specified as a vector of `matlab.net.http.AuthInfo` objects or a string in the format defined by RFC 7235 and RFC 2617. Use the `AuthenticateField.convert` method to parse this field.

Methods

`convert`	`Value` of `AuthenticateField` as vector of `AuthInfo` objects, one for each challenge in the header field, in the order they appear in `AuthenticateField`. The `Realm` property in each `AuthInfo` object contains a string to determine the context of the challenge. For example, to create a user name and password prompt for credentials, display the `Realm` property text to the user. If the challenge does not contain a realm attribute, the `Realm` property is an empty value.

See Also

See Also

matlab.net.http.AuthInfo | matlab.net.http.RequestMessage | matlab.net.http.ResponseMessage | matlab.net.http.HTTPOptions

| matlab.net.http.Credentials | matlab.net.http.StatusCode | matlab.net.http.field.AuthorizationField

External Websites

RFC 7235 Hypertext Transfer Protocol (HTTP/1.1): Authentication
RFC 2617 HTTP Authentication: Basic and Digest Access Authentication

Introduced in R2016b

matlab.net.http.field.AuthenticationInfoField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField

HTTP Authentication-Info header field in response message

Description

An `AuthenticationInfoField` object contains information about a successful Digest authentication. A server or proxy creates an Authentication-Info header field in a response message.

Since this field appears only in response messages, you do not normally create one of these fields. Use this field only if you are implementing your own authentication protocol or one that MATLAB does not automatically support.

If you use the automatic authentication provided by MATLAB by specifying the `Credentials` property in `HTTPOptions`, you do not need to access this field.

Construction

`obj = matlab.net.http.field.AuthenticationInfoField(name)` creates an Authentication-Info header field with the Name property set to `name` with no value.

`obj = matlab.net.http.field.AuthenticationInfoField(name,value)` creates a header field with the Value property set to `value`.

Properties

`Name` — Header field name

`'Authentication-Info' | 'Proxy-Authentication-Info'`

Header field name, specified as `'Authentication-Info'` or `'Proxy-Authentication-Info'`.

`Value` — Header field value

string

Header field value, specified as a string.

Methods

`convert`	`Value` of `AuthenticationInfoField` as vector of `AuthInfo` objects containing tokens and values

See Also

See Also

matlab.net.http.AuthInfo | matlab.net.http.HTTPOptions

External Websites

RFC 7615 — HTTP Authentication-Info and Proxy-Authentication-Info Response Header Fields
RFC 2617 — section 3.2.3 The Authentication-Info Header
RFC 2617 — section 3.6 Proxy-Authentication and Proxy-Authorization

Introduced in R2016b

matlab.net.http.field.AuthorizationField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField

HTTP Authorization or Proxy-Authorization header field

Description

An `AuthorizationField` object contains credentials in a request message in response to a challenge from a server in an `AuthenticateField`. The credentials are in the form of an `AuthInfo` object. For a description of these fields, see RFC 7235 section 4.2 and section 4.4.

MATLAB automatically creates this field when:

- `HTTPOptions.Authenticate` property is `true` (default) in a request message.
- You have specified appropriate credentials in the `HTTPOptions.Credentials` property.
- MATLAB supports the authentication scheme requested by the server.

You create this field explicitly when you disable automatic authentication or implement an unsupported authentication protocol. If you create this field explicitly, then set the `Value` property to a valid authorization string or an `AuthInfo` object.

To see the `AuthorizationField` that was sent to the server for automatic authentication, examine the completed request or history arguments returned by the `RequestMessage.send` method.

Construction

`obj = matlab.net.http.field.AuthorizationField(name,value)` creates an authorization header field with the Name property set to `name` and the Value property set to `value`. Create this field if you disabled automatic authentication or to implement an unsupported authentication protocol.

Properties

`Name` — Header field name
`'Authorization'` | `'Proxy-Authorization'`

Header field name, specified as `'Authorization'` or `'Proxy-Authorization'`.

`Value` — Authorization
string | `matlab.net.http.AuthInfo` object

Authorization, specified as a valid authorization string or a `matlab.net.http.AuthInfo` object.

Methods

`convert`	`Value` of `AuthorizationField` as vector of `AuthInfo` objects. There is only one `AuthInfo` object in an `AuthorizationField`. If you pass in a vector of `AuthorizationField` objects, `convert` returns an equal-size vector of `AuthInfo` objects. The parameters in `AuthInfo` correspond to parameters of the credentials in the `AuthorizationField`. This set of parameters varies depending on the `AuthInfo.Scheme` property, which is the first token in the field.

Attributes

`Sealed`	`true`

Examples

View AuthorizationField Credentials in Request

```
import matlab.net.http.*
creds = Credentials('Username','MyName','Password','MyPassword');
options = HTTPOptions('Credentials', creds);
```

```
[response, request] = RequestMessage().send('http://myhost.com',options);
authorizationField = request.getFields('Authorization');
authInfo = authorizationField.convert;
disp(string(authInfo));
```

See Also

Topics

Class Attributes

External Websites

RFC 7235, section 4.2 Authorization
RFC 7235, section 4.4 Proxy-Authorization

matlab.net.http.field.ContentLengthField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField, matlab.net.http.field.IntegerField

HTTP Content-Length field

Description

A `ContentLengthField` object is an HTTP header field in a request or a response message that specifies the length of the payload in bytes.

MATLAB requires all outbound messages with a payload to contain a Content-Length field. If a message contains a nonempty body, MATLAB creates a Content-Length field based on the length of the data. For more information, see RFC 7231, section 3.3.2. Content-Length.

Response messages might or might not contain this field.

Construction

`obj = matlab.net.http.field.ContentLengthField(value)` creates a Content-Length header field with the Value property set to `value`.

Properties

`Name` — Header field name

`'Content-Length'`

Header field name, specified as `'Content-Length'`.

`Value` — Length of payload

nonnegative integer | string

Length of payload in bytes, specified as a nonnegative integer or a string that evaluates to a nonnegative integer.

Methods

`convert`	Return `Value` of `ContentLengthField` as integer of type `double`

See Also

External Websites

RFC 7231, section 3.3.2. Content-Length

Introduced in R2016b

matlab.net.http.field.ContentLocationField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField, matlab.net.http.field.URIReferenceField

HTTP Content-Location header field

Description

A `ContentLocationField` object contains a uniform resource identifier (URI). A server inserts a Content-Location field in a response message.

Properties

`Name` — Header field name
`'Content-Location'`

Header field name, specified as `'Content-Location'`.

`Value` — URI
`matlab.net.URI` object | string

URI, specified as a `matlab.net.URI` object or a string acceptable to the `URI` constructor. `Value` must not contain a `Fragment` property.

Methods

`convert`	Return `Value` of `ContentLocationField` as `matlab.net.URI` object

Attributes

`Sealed`	`true`

See Also

See Also

matlab.net.URI

Topics

Class Attributes

Introduced in R2016b

matlab.net.http.field.ContentTypeField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField, matlab.net.http.field.MediaRangeField

HTTP Content-Type header field

Description

A `ContentTypeField` object is an HTTP header field in a request or response message. The field contains a single media type specification indicating the type of content in the body of the message.

In a request message, a Content-Type field determines how data specified in the `MessageBody.Data` property is converted. For information on this conversion, see "HTTP Data Type Conversion". If a request message contains a nonempty body, but does not contain a Content-Type field, then MATLAB creates a Content-Type field based on the data type.

Construction

`obj = matlab.net.http.field.ContentTypeField(value)` creates a Content-Type header field with the Value property set to `value`.

Properties

`Name` — Header field name
`'Content-Type'`

Header field name, specified as `'Content-Type'`.

`Value` — Media type
`matlab.net.http.MediaType` object | string

Media type, specified as a `matlab.net.http.MediaType` object or a string acceptable to the `MediaType` constructor. `Value` cannot contain a quality (`'q'`) parameter.

Example: `'text/html;charset=utf-8'`

Methods

`convert`	Return `Value` of `ContentTypeField` as `MediaType` object

Attributes

`Sealed`	`true`

See Also

See Also
MediaType | MessageBody | RequestMessage | ResponseMessage

Topics
"HTTP Data Type Conversion"
Class Attributes

External Websites
RFC 7231 Semantics and Content, section 3.1.1.5. Content-Type

Introduced in R2016b

matlab.net.http.field.CookieField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField

HTTP Cookie header field

Description

If there are cookies in a Set-Cookie field, then you can send them to a server by including a `CookieField` object in your request message. For more information, see RFC 6265 HTTP State Management Mechanism.

Construction

`obj = matlab.net.http.field.CookieField(value)` creates a Cookie header field with the Value property set to `value`.

Properties

`Name` — Header field name
`'Cookie'`

Header field name, specified as `'Cookie'`.

`Value` — Cookie
string

Cookie, specified as a string.

Methods

`convert`	All `Cookie` objects in `CookieField`

Attributes

Sealed	true

Examples

Send All Received HTTP Cookies Back to Server

This example sends all cookies to a server. In practice, you would send only unexpired cookies.

If the initial exchange involves multiple messages for authentication and redirection, you might want to obtain the `CookieInfo` object from the history containing all these messages. For more information, see `CookieInfo.collectFromLog`.

```
r = matlab.net.http.RequestMessage;
resp = send(r,'http://www.mathworks.com');
setCookieFields = resp.getFields('Set-Cookie');
if ~isempty(setCookieFields)
   % fetch all CookieInfos from Set-Cookie fields and add to request
   cookieInfos = setCookieFields.convert;
   r = r.addFields(matlab.net.http.field.CookieField([cookieInfos.Cookie]));
end
resp = r.send('http://www.mathworks.com');
```

See Also

See Also

matlab.net.http.RequestMessage | matlab.net.http.ResponseMessage | matlab.net.http.Cookie | matlab.net.http.CookieInfo | matlab.net.http.field.SetCookieField

Topics

Class Attributes

External Websites

RFC 6265 HTTP State Management Mechanism

Introduced in R2016b

matlab.net.http.field.DateField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField, matlab.net.http.field.HTTPDateField

HTTP Date header field

Description

A `DateField` object represents an HTTP Date header field. A Date field is an optional field that represents the date and time a request or a response message was originally sent. If you do not specify a Date field in a request message, then MATLAB inserts one when you send it.

Construction

`obj = matlab.net.http.field.DateField(value)` creates a Date header field with the Value property set to `value`.

`obj = matlab.net.http.field.DateField` sets the field value to the current date and time.

Properties

`Name` — Header field name
`'Date'`

Header field name, specified as `'Date'`.

`Value` — Date and time
current date and time (default) | `datetime` | string

Date and time, specified as a `datetime` object or a string in a valid HTTP date format. The default is the current date and time. `Value` must not be in the future. If the time zone is missing, the local time zone is assumed. The `datetime` `Format` property is ignored.

Methods

`convert`	`Value` of `Date` field as array of MATLAB `datetime` objects. Interprets field as a comma-separated list of quoted HTTP dates.

See Also

External Websites

RFC 7231 Semantics and Content, section 7.1.1.2 Date

Introduced in R2016b

matlab.net.http.field.GenericField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField

HTTP header field with any name and value

Description

Use a `GenericField` header field for testing or to work around a built-in restriction that might not be appropriate for your application. The `HeaderField` class and its subclasses validate the `Value` property for the given `Name` property. To override a `Value` that might otherwise be rejected, create a `GenericField` header field.

If a header field in a response message contains a value that is not valid for the field name, MATLAB creates a `GenericField` object.

Construction

`obj = matlab.net.http.field.GenericField(name,value)` creates an HTTP header field with the Name property set to `name` and the Value property set to `value`.

Properties

`Name` — Header field name

string | character vector

Header field name, specified as a string or character vector.

`Value` — Header value

string | character vector

Header value, specified as a string or character vector.

Methods

`convert`	`Value` of header field as MATLAB type.

	MATLAB checks the `matlab.net.http.field` package for a class with the `GenericField.Name` property. If there is a class for this field, then `convert` invokes the `convert` method of that class. If the conversion fails or if no class supports this `Name` property, then `convert` throws an exception.

Attributes

`Sealed`	`true`

Examples

Override Content-Length Header Field Value

A Content-Length header field must contain a number.

The following statement generates an error.

```
field = matlab.net.http.field.ContentLengthField('abc');
```

If instead you need a character value, create a `GenericField` object.

```
field = matlab.net.http.field.GenericField('Content-Length','abc');
```

See Also

See Also

matlab.net.http.HeaderField | matlab.net.http.field.ContentLengthField | matlab.net.http.RequestMessage | matlab.net.http.ResponseMessage

Topics

Class Attributes

Introduced in R2016b

matlab.net.http.field.HTTPDateField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField

HTTP header field containing date

Description

The `HTTPDateField` is an HTTP header field containing a date. The fields implemented by this class contain a single date in standard HTTP date format.

Construction

`obj = matlab.net.http.field.HTTPDateField(name)` creates an HTTP date header field with the Name property set to `name`.

`obj = matlab.net.http.field.HTTPDateField(name,value)` sets the Value property to `value`.

Properties

`Name` — Date field name

`'Date'` | `'Expires'` | `'Retry-After'` | `'Accept-Datetime'` | `'Last-Modified'` | `'If-Modified-Since'`

Date field name, specified as a string of one of these values: `'Date'`, `'Expires'`, `'Retry-After'`, `'Accept-Datetime'`, `'Last-Modified'`, or `'If-Modified-Since'`.

To create a `Date` field, use the `matlab.net.http.field.DateField` subclass.

`Value` — Date

`datetime` | string

Date, specified as a `datetime` object or a string in a valid HTTP date format as specified in RFC 7231 Semantics and Content, section 7.1.1.1. Date/Time Formats. If a `datetime` object is provided without a time zone, it is assumed to be local.

See Also

See Also

matlab.net.http.field.DateField

External Websites

RFC 7231 Semantics and Content, section 7.1.1.1. Date/Time Formats

Introduced in R2016b

matlab.net.http.field.IntegerField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField

Base class for HTTP header fields containing nonnegative integers

Description

Use the `IntegerField` class to construct a header field containing a nonnegative integer, for which there is no existing class in the `matlab.net.http.field` package.

Construction

`obj = matlab.net.http.field.IntegerField(name,value)` creates an HTTP header field with the Name property set to `name` and the Value property set to `value`.

Properties

`Name` — Header field name

string

Header field name, specified as a string. Any `Name`, except names shown by the matlab.net.http.HeaderField.displaySubclasses method, can be used.

`Value` — Integer value

string

Integer value, specified as a string representing any real, nonnegative numeric type.

Methods

`convert`	`Value` of `IntegerField` as integer of type `double`

See Also

See Also

matlab.net.http.HeaderField.displaySubclasses

Topics

Property Attributes

Introduced in R2016b

matlab.net.http.field.LocationField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField, matlab.net.http.field.URIReferenceField

HTTP Location header field

Description

A `LocationField` object contains the message uniform resource identifier (URI). The server adds a Location field to a response message to tell you to redirect messages to another URI. The meaning of this field depends on the status code of the response.

Properties

`Name` — Header field name
`'Location'`

Header field name, specified as `'Location'`.

`Value` — URI
`matlab.net.URI` object | string

URI, specified as a `matlab.net.URI` object or a string acceptable to the `URI` constructor.

Methods

`convert`	Return `Value` of `LocationField` as `matlab.net.URI` object

See Also

See Also
matlab.net.URI | matlab.net.http.StatusCode

External Websites

RFC 3986 — Uniform Resource Identifier (URI): Generic Syntax

Introduced in R2016b

matlab.net.http.field.MediaRangeField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField

Base class for HTTP Content-Type and Accept header fields

Description

The `MediaRangeField` class is the base class for Content-Type and Accept header fields. Fields in a `MediaRangeField` object contain a comma-separated list of strings, which the `MediaType` class interprets.

Properties

`Name` — Header field name
string

Header field name, specified as a string.

`Value` — Header field value
string

Header field value, specified as a string.

Methods

`convert`	Return `Value` of `MediaRangeField` as vector of `MediaType` objects

See Also

See Also
matlab.net.http.field.AcceptField | matlab.net.http.field.ContentTypeField | matlab.net.http.MediaType

External Websites

RFC 7233, Range Requests

Introduced in R2016b

matlab.net.http.field.SetCookieField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField

HTTP Set-Cookie header field

Description

A `SetCookieField` object appears in a response message created by the server. A message can have one or more Set-Cookie fields. To extract the `Value` property as a `CookieInfo` object, call the `convert` method.

Properties

`Name` — Header field name

`'Set-Cookie'`

Header field name, specified as `'Set-Cookie'`.

`Value` — Header field value

string

Header field value, specified as a string.

Methods

convert	Returns CookieInfo object for each Set-Cookie field

Attributes

`Sealed`	`true`

Examples

Obtain Information from All Set-Cookie Fields in HTTP Message

```
uri = matlab.net.URI('http://www.mathworks.com');
opts = matlab.net.http.HTTPOptions('MaxRedirects',1);
resp = matlab.net.http.RequestMessage().send(uri,opts);
setCookieFields = resp.getFields('Set-Cookie');
if ~isempty(setCookieFields)
   cookieInfos = setCookieFields.convert(uri);
end
```

See Also

See Also

matlab.net.http.ResponseMessage | matlab.net.http.Cookie | matlab.net.http.CookieInfo

Topics

Class Attributes

Introduced in R2016b

convert

Class: matlab.net.http.field.SetCookieField
Package: matlab.net.http.field

Returns CookieInfo object for each Set-Cookie field

Syntax

```
value = convert(fields)
value = convert(fields,uri)
```

Description

`value = convert(fields)` returns a `CookieInfo` object for each Set-Cookie field. A `SetCookieField` contains information about one cookie. If the server sends multiple cookies, then there are multiple `SetCookieField` objects.

```
value = convert(fields,uri)
```

Input Arguments

`fields` — Set-Cookie header field
`matlab.net.http.field.SetCookieField` object

Set-Cookie header field, specified as a `matlab.net.http.field.SetCookieField` object.

`uri` — URI
`matlab.net.URI` object

URI, specified as a `matlab.net.URI` object. The URI is that of the request, used to compare against or initialize the `CookieInfo.Domain` property.

If the `SetCookieField` does not contain a Domain attribute, then the `CookieInfo.Domain` property is set to the `URI.Host` property.

If there is a Domain attribute, its value must domain-match the `URI.Host` or no `CookieInfo` is returned for that `SetCookieField`. If it matches, then the `Domain` property is set to the Domain attribute. For information on domain matching, see RFC 6265 section 5.1.3 and section 5.3, step 6.

If you do not specify a URI, then the `CookieInfo.Domain` property is not set or checked. Use this syntax if you do not intend to use the Domain attribute to manage your cookie store.

Output Arguments

`value` — CookieInfo
vector of `matlab.net.http.CookieInfo` objects

CookieInfo object, returned as a vector of `matlab.net.http.CookieInfo` objects corresponding to the Set-Cookie fields in the `fields` vector.

See Also

External Websites

RFC 6265, section 5.1.3 Domain Matching
RFC 6265, section 5.3 Storage Model step 6

Introduced in R2016b

matlab.net.http.field.URIReferenceField class

Package: matlab.net.http.field
Superclasses: matlab.net.http.HeaderField

Base class for HTTP header fields containing URI components

Description

The `URIReferenceField` class is a base class for creating Location and Content-Location header fields. Use the `URIReferenceField` class to construct different header fields containing a single URI or a portion of a URI.

Construction

`obj = matlab.net.http.field.URIReferenceField(name,value)` creates an HTTP header field with the Name property set to `name` and the Value property set to `value`.

Properties

`Name` — Header field name

string

Header field name, specified as a string. Any `Name`, except names shown by the matlab.net.http.HeaderField.displaySubclasses method, can be used.

`Value` — URI

`matlab.net.URI` | string

URI, specified as a `matlab.net.URI` object or a string acceptable to the `URI` constructor.

Methods

`convert`	`Value` of `URIReferenceField` as `matlab.net.URI` object

See Also

See Also

matlab.net.URI | matlab.net.http.field.LocationField | matlab.net.http.field.ContentLocationField | matlab.net.http.HeaderField.displaySubclasses

External Websites

RFC 3986 — Uniform Resource Identifier (URI): Generic Syntax

Introduced in R2016b

matlab.net.ArrayFormat class

Package: matlab.net

Convert arrays in HTTP queries

Description

Use an `ArrayFormat` enumeration with the `matlab.net.QueryParameter` class to control the format used to convert query values representing multiple values.

Enumeration Member Name	Description
`csv`	Format that generates a comma-separated list, such as `parm=1,2,3`
`json`	Format that generates a JSON-like array, such as `parm=[1,2,3]`
`php`	Format that generates a name with brackets and multiple values, such as `parm[]=1&[]=2&[]=3`
`repeating`	Format that generates repeating name/value pairs, such as `parm=1&=2&=3`

A query value is considered to contain multiple values when it is one of the following:

- Nonscalar number, string, logical, or datetime (Each element is a value.)
- m-by-n character array, where each row is interpreted as a string
- Cell vector, where each element is a value

Query values, except for character arrays, with more than one dimension are not supported. In cell vectors, each element must be a scalar or character vector.

Attributes

```
Sealed                              true
```

See Also

See Also

matlab.net.QueryParameter | matlab.net.URI

Topics

Class Attributes

Introduced in R2016b

matlab.net.QueryParameter class

Package: matlab.net

Parameter in query portion of uniform resource identifier (URI)

Description

Use the `QueryParameter` class to create a URI query string of the form:

```
name1=value1&name2=value2&name3=value3
```

where each `name=value` segment is a `QueryParameter` object, converted to a string using the `string` method. The `string` method on a vector of `QueryParameter` objects joins the results using the `&` character. The `string` method converts any values to strings and performs all necessary encoding of special characters in the result.

Construction

`obj = matlab.net.QueryParameter` creates an empty query parameter.

`obj = matlab.net.QueryParameter(paramName,paramValue)` creates a query parameter vector of `paramName`,`paramValue` pair arguments. You can specify several argument pairs in any order as `paramName1,paramValue1,...,paramNameN,paramValueN`.

`obj = matlab.net.QueryParameter(qStruct)` creates a query parameter vector from a structure.

`obj = matlab.net.QueryParameter(qStr)` parses `qStr` into the query.

`obj = matlab.net.QueryParameter( ___ ,Format)` specifies the format to be used for nonscalar values, and can include any of the input arguments in previous syntaxes.

Input Arguments

`paramName` — Parameter name
string | character vector

Parameter name, specified as a string or character vector.

`paramValue` — Parameter value
type required by `paramName`

Parameter value, specified as a type required by `paramName`.

`qStruct` — Parameter names and values
structure

Parameter names and values, specified as a structure. The fields of `qStruct` define the parameter names and values.

Data Types: `struct`

`qStr` — Parameter names and values
string | character vector

Parameter names and values, specified as a string or character vector. The `qStr` is a completed, encoded query as it would appear in a URI, with an optional leading `?` character.

`qStr` is split at the `&` characters into individual `name=value` query parameters. The `Name` property is set to `name` and the `Value` property is set to `value`.

A triplet of characters of the form `%` and two hex digits represents a percent-encoded byte. A sequence of these bytes is treated as UTF-8 encoded characters. For example, the UTF-8 encoding for the euro sign (€) is `E2 82 AC`.

```
q1 = matlab.net.QueryParameter('V=%e2%82%ac')
```

```
q1 = 

  QueryParameter with properties:

      Name: "V"
     Value: "€"
    Format: csv
```

The `+` and `%20` characters are treated as spaces.

```
q2 = matlab.net.QueryParameter('V=a+b%20c')
```

```
q2 = 
```

```
  QueryParameter with properties:

      Name: "V"
     Value: "a b c"
    Format: csv
```

The `string` method implements percent-encoding on characters that require encoding. For example, the € is encoded.

```
string(q1)
```

```
ans = V=%E2%82%AC
```

However, the characters in the `qStr` argument `'V=a+b%20c'` do not need encoding.

```
q3 = string(q2)
```

```
q3 = V=a+b+c
```

Although the result from the `string` method does not match `qStr`, the values are identical when used in a URI.

Properties

`Name` — Parameter name

string | character vector

Parameter name, specified as a string or character vector.

`Value` — Parameter value

real number | logical | datetime | string | character vector

Parameter value, specified as a real number, logical, datetime (with value other than NaT), string, character vector, or a vector or cell vector of these values. If `Value` is any other type, then `Value` must support `string` or `char` methods that convert the value to a character vector. If empty, `Value` is treated as an empty string.

`Format` — Encoding format

`matlab.netArrayFormat.csv` (default) | `matlab.netArrayFormat` enumeration

Encoding format, specified as a `matlab.net.ArrayFormat` enumeration, to use for encoding `Value` if it is a vector.

Methods

char	Encoded query parameter as character vector
string	Encoded query parameter as string

Attributes

`Sealed`	`true`

Examples

Create HTTP Query Parameters from Structure

Create a structure field name `this` and set it to the value `that`.

```
qStruct.this = 'that';
QP = matlab.net.QueryParameter(qStruct)
```

```
QP 
  QueryParameter with properties:

      Name: "this"
     Value: 'that'
    Format: csv
```

Create HTTP Query Parameters from Character Vector

Create a character vector with two queries, `this=that` and `one=2`. The `QueryParameter` method splits `qStr` at the `&` character into two `QueryParameter` objects.

```
qStr = '?this=that&one=2';
QPs = matlab.net.QueryParameter(qStr);
```

The `name=value` pairs in `qStr` define the `Name` and `Value` properties.

```
name1 = QPs(1).Name
```

```
name1 =
"this"
```

```
value1 = QPs(1).Value
```

```
value1 =
"that"
```

```
name2 = QPs(2).Name
```

```
name2 =
"one"
```

```
value2 = QPs(2).Value
```

```
value2 =
"2"
```

See Also

See Also

matlab.net.ArrayFormat | matlab.net.URI

Topics

Class Attributes

Introduced in R2016b

char

Class: matlab.net.QueryParameter
Package: matlab.net

Encoded query parameter as character vector

Syntax

```
str = char(obj)
```

Description

`str = char(obj)` returns a `QueryParameter` object as an encoded MATLAB character vector.

Input Arguments

`obj` — Query parameter
`matlab.net.QueryParameter` object

Query parameter, specified as one or more `matlab.net.QueryParameter` objects.

Output Arguments

`str` — Query parameter
character vector

Query parameter, returned as a character vector. For more information, see matlab.net.QueryParameter.string.

See Also

See Also
matlab.net.QueryParameter.string

Introduced in R2016b

string

Class: matlab.net.QueryParameter
Package: matlab.net

Encoded query parameter as string

Syntax

```
str = string(obj)
```

Description

`str = string(obj)` returns a `QueryParameter` object as an encoded string.

Input Arguments

`obj` — Query parameter
`matlab.net.QueryParameter` object

Query parameter, specified as one or more `matlab.net.QueryParameter` objects. If `obj` is a vector of `QueryParameter` objects, then the method returns a single string joining the encoded members with `&` character. If `obj` is empty, then the method returns `""`.

Output Arguments

`str` — Query parameter
string

Query parameter, returned as a string.

`str` is of the form `name=value`, where `name` is the `Name` property and `value` is the `Value` property, represented as a string. If `Value` is a cell array or nonscalar other than a character vector, it is converted based on the `Format` property. The conversion might

result in multiple `name=value` pairs separated by the `&` character and including other punctuation. Special characters in `Name` or `Value` that are not permitted in a query are percent-encoded (%), except for space, which is encoded as `+`. For more information on encoding, see the `qStr` argument to the QueryParameter constructor.

See Also

See Also

matlab.net.ArrayFormat | matlab.net.QueryParameter

Introduced in R2016b

matlab.net.URI class

Package: matlab.net

Uniform resource identifier (URI)

Description

The `matlab.net.URI` class constructs an internet uniform resource identifier (URI), such as a web address or a URL. An internet URI is a string divided into components. Each component is represented by a property of the `URI` class. The following text shows the properties and their associated punctuation, separated by spaces for clarity. The spaces do not appear in the encoded URI. The associated punctuation is not part of the property value.

```
Scheme: //Authority /Path(1) /Path(2) ... /Path(end) ?Query #Fragment
```

where `Authority` contains these properties:

```
UserInfo@ Host :Port
```

Use the `matlab.net.URI` `string` or `char` methods to create an internet URI. These methods encode the properties by adding punctuation to nonempty properties and by escaping reserved characters.

All properties are optional. However, different uses might require certain properties to be set.

To eliminate a property and its punctuation from the output string, set the property value to `[]`.

Construction

`obj = matlab.net.URI` creates an empty URI.

`obj = matlab.net.URI(destination)` creates the URI specified by `destination`.

`obj = matlab.net.URI(destination,queryVector)` sets the Query property to `queryVector`. Query values are appended to any query parameters already specified in `destination`.

`obj = matlab.net.URI(destination,queryName,queryValue)` adds one or more `queryName`,`queryValue` parameters to the `Query` property.

`obj = matlab.net.URI(destination,queryVector,queryName,queryValue)` adds `queryVector` and the `queryName`,`queryValue` parameters to the `Query` property.

`obj = matlab.net.URI( ___ ,format)` specifies the format of the output when an array appears in a `queryValue` argument. You can use any of the input arguments in the previous syntaxes.

`obj = matlab.net.URI( ___ ,'literal')` indicates that `destination` is already encoded. Use this option if you copy and paste an already-encoded URI, for example, from the address bar of a browser. When you read properties of this URI directly, you see the decoded version.

Input Arguments

`destination` — Destination

string | character vector | `matlab.net.URI` object

Destination, specified as a string or character vector specifying a URI or portions of one, or a `matlab.net.URI` object. If `destination` is a `matlab.net.URI` object, then `destination` must be the only argument.

Example: `http://user:pwd@www.mathworks.com:8000/product/matlab?abc=def&this=that#xyz` All properties

Example: Host and Scheme properties: `https://www.mathworks.com`

Example: Host only: `//www.mathworks.com`

Example: Host and Path: `//www.mathworks.com/products/matlab/`

Example: Path only: `products/matlab/live-editor`

Example: Host and Query: `//www.mathworks.com/search/site_search.html?q=weboptions`

`queryVector` — Query property

`matlab.net.QueryParameter` object

Query property, specified as a vector of `matlab.net.QueryParameter` objects. A query is of the form:

```
name1=value1&name2=value2&name3=value3
```

Example: `matlab.net.QueryParameter('hl','en','ie','utf8','num',50)`

`queryName` — Query name

string | character vector

Query name, specified as a string or character vector. The web service defines `queryName`,`queryValue` pairs that it accepts as part of a request. Do not encode characters in `queryName`.

`queryValue` — Query value

character array | numeric | logical | `datetime`

Query value, specified as a character array, or a numeric, logical, or `datetime` value or array. Do not encode characters in `queryValue`.

`format` — Output format

`matlab.net.ArrayFormat` object

Output format, specified as a `matlab.net.ArrayFormat` object when an array appears in a `queryValue` argument. For allowed values, see ArrayFormat.

The `format` argument does not affect the format of values in the `queryVector` argument.

Properties

`Scheme` — URI scheme

string | character vector

URI scheme, sometimes called protocol, appearing before the `://` characters, specified as a string or character vector. `Scheme` always returns a string. If not empty, then `Scheme` must be `http` or `https`. However, this convention is not enforced. MATLAB does not support other schemes, such as `file`.

Example: `http`

Example: `https`

`UserInfo` — User information

string | character vector

User information, specified as a string or character vector. `UserInfo` appears before the `Host` property followed by an `@` character. The `string` method percent-encodes special characters. When setting `UserInfo`, do not encode the value.

Example: `name`

Example: `name:password`

`Host` — Host name

string or character vector in DNS name format | IPv4 or IPv6 address

Host name, specified as a string or character vector. The value is in Domain Name System (DNS) format or as an Internet Protocol version 4 (IPv4) or version 6 (IPv6) address. The `string` method percent-encodes characters that are not allowed in the host portion of a URI. Period characters (`.`) are unchanged. When setting `Host`, do not encode the value.

Example: `www.mathworks.com`

Example: `2222:7344:0db8:0000:0100:8a2e:0370:85a3` IPv6 address

`Port` — Port number

number | string | character vector

Port number, specified as a number or a string or character vector representing a number in the range 0–65535, stored as a `uint16`.

Example: 8000

`Path` — Path segments

string | string vector | character vector | cell array of character vectors

Path segments, specified as a string or string vector or as a character vector or cell array of character vectors. The result is always a vector of strings. To see the value of the encoded path, use the `EncodedPath` property.

A path in a URI is specified by the `EncodedPath` property. `EncodedPath` is a series of segments separated by the `/` character, where each of those segments is a member of `Path`.

```
Path(1)/Path(2)/Path(3)/.../Path(end)
```

The `/` characters do not appear in `Path`, but `EncodedPath` contains them. For example,

```
uri = matlab.net.URI;
```

```
uri.Path = {'products' 'matlab'};
P = uri.Path
```

```
P = 
    "products"    "matlab"
```

```
EP = uri.EncodedPath
```

```
EP = products/matlab
```

If you set `Path` to a character vector or scalar string that contains a `/` character, then the value is split into segments at the `/` characters. The result is the same as specifying a vector of strings or cell array of character vectors.

```
uri.Path = 'products/matlab';
P = uri.Path
```

```
P = 
    "products"    "matlab"
```

There is always one more `Path` segment than the number of `/` characters in `EncodedPath`. Any segment can be an empty string. If `Path(1)` is an empty string, then `EncodedPath` begins with `/`. If `Path(end)` is an empty string, then `EncodedPath` ends with `/`.

```
uri.Path = '/products/matlab/';
EP = uri.EncodedPath
```

```
EP = /products/matlab/
```

When setting `Path` to a nonscalar string or cell array, characters not allowed in the path portion of a URI are percent-encoded in `EncodedPath`. To include the # character,

```
uri.Path = {'foo#bar'};EP = uri.EncodedPath
```

```
EP = foo%23bar
```

Do not encode the # character. If you do, then the encoded characters are encoded again.

```
uri.Path = {'foo%23Fbar'};
EP = uri.EncodedPath
```

```
EP = foo%2523Fbar
```

`Path` can be relative or absolute. An absolute path is one with more than one segment, whose first segment is empty. It is encoded as a string beginning with `/` character

followed by the second string. This definition of absolute path corresponds to `path-absolute`, defined in RFC 3986 section 3.3. A relative path is one whose first string is nonempty. It is encoded without a leading `/`. For example, create an absolute path:

```
uri1 = matlab.net.URI;
uri1.Path = {'' 'products' 'matlab'};
EP = uri1.EncodedPath
```

```
EP = /products/matlab
```

Create a relative path:

```
uri2 = matlab.net.URI;
uri2.Path = {'products' 'matlab'};
EP = uri2.EncodedPath
```

```
EP = products/matlab
```

If the URI contains a `Scheme`, `Host`, `UserInfo` or `Port` property, and `Path` is not empty, then `EncodedPath` has a leading `/`. The `/` character separates `Path` from the other properties. Therefore, the distinction between absolute and relative paths exists only for URIs that do not contain `Scheme`, `Host`, `UserInfo`, or `Port` properties. For example, `uri1` is an absolute path.

```
uri1.EncodedPath
```

```
ans = /products/matlab
```

Set the `Host`:

```
uri1.Host = 'www.mathworks.com';
disp(string(uri1))
```

```
//www.mathworks.com/products/matlab
```

Set `Host` of relative path `uri2`:

```
uri2.EncodedPath
```

```
ans = products/matlab
```

```
uri2.Host = 'www.mathworks.com';
disp(string(uri2))
```

```
//www.mathworks.com/products/matlab
```

To create a URI with a path that points to the root, set `Path` to `string.empty` or `["" "" ""]`.

```
uri.Path = {'products' 'matlab' ''};
EP = uri.EncodedPath
```

```
EP = products/matlab/
```

To set `Path` to a folder, add an empty string to the end of the vector. This convention adds a trailing `/` to `EncodedPath`.

```
uri.Path = {'products' 'matlab' ''};
EP = uri.EncodedPath
```

```
EP = products/matlab/
```

`Query` — Query of URI

`matlab.net.QueryParameter` object | string

Query of URI, specified as a vector of `matlab.net.QueryParameter` objects or a string containing the encoded query with an optional leading `?` character.

`Fragment` — Direction to secondary resource

string | character vector

Direction to a secondary resource, specified as a string or character vector. The `string` method percent-encodes characters that are not allowed in the fragment portion of a URI. When setting `Fragment`, do not encode the value.

Example: In the URI `http://www.mathworks.com/help/matlab/ref/weboptions.html#examples`, the `Fragment` property is `examples`.

`Absolute` — Whether URI is absolute (read-only)

`true` | `false`

Whether URI is absolute, specified as `true` or `false`. An absolute URI has a nonempty `Scheme` property. If the URI is not absolute, then it is relative. For a definition of `absolute-URI`, see RFC 3986 Uniform Resource Identifier (URI): Generic Syntax — Section 4.3 Absolute URI.

The `Path` property in an absolute URI is always treated as an absolute path and the `EncodedPath` property always contains a leading `/` character. To send a message, the URI must be absolute and must also contain a nonempty `Host` property.

Data Types: `logical`

`EncodedAuthority` — Encoded authority portion of URI

string | character vector

Encoded authority portion of a URI, specified as a string or character vector with associated punctuation appearing only if the property is nonempty. The format of `EncodedAuthority` is `UserInfo@Host:Port`. Setting `EncodedAuthority` is a shortcut to setting the `UserInfo`, `Host`, and `Port` properties, except that you must encode special characters.

Example: In the URI `http://user:pwd@www.mathworks.com:8000/product/matlab?abc=def&this=that#xyz`, the `EncodedAuthority` property is `user:pwd@www.mathworks.com:8000`.

`EncodedPath` — Encoded path

string | character vector

Encoded path, specified as a string or character vector. Read this property to obtain the `Path` property as an encoded string as it would appear in the encoded URI. If you have an already-encoded path as a string, then set the `EncodedPath` property instead of the `Path` property to prevent further encoding. When reading `EncodedPath`, it has a leading `/` if `Path` is not `[]` and there are nonempty components in the URI before `Path`.

Setting `EncodedPath` to an empty array (`''`, `[]` or `string.empty`) is equivalent to setting `Path` to that value.

If there is no `Path` property in an encoded URI, then `EncodedPath` returns an empty string, `""`. However, `EncodedPath` is never an empty array.

Example: In the URI `http://www.mathworks.com/solutions/robotics`, the `EncodedPath` property is `/solutions/robotics`.

`EncodedQuery` — Encoded query

string | character vector

Encoded query, specified as a string or character vector. `EncodedQuery` returns the same value as calling the `string` method on the `Query` property. Setting `EncodedQuery` is equivalent to setting the `Query` property.

Example: In the URI `http://www.mathworks.com/support/search_results.html?q=+weboptions+product:"MATLAB+Compiler"`, the `EncodedQuery` property is `q=+weboptions+product:%22MATLAB+Compiler%22`.

`EncodedURI` — Entire encoded URI

string | character vector

Entire encoded URI, specified as a string or character vector. `EncodedURI` returns the same value as the `matlab.net.URI.string` method. Setting `EncodedURI` is equivalent to calling the `URI` constructor with the `'literal'` argument.

Methods

These methods implement the equivalent MATLAB functionality for this class.

`eq`	Compare URIs for equality. Two URIs are considered equal if they refer to the same resource. An empty string or empty `Path` property is considered equal to `[]`.
`char`	URI as character vector
`string`	URI as string

Examples

Search mathworks.com for Term `weboptions`

Create a URI.

```
U = matlab.net.URI('https://www.mathworks.com');
U.Query = matlab.net.QueryParameter('q','weboptions');
U.Path = 'search/site_search.html';
```

Display the search results containing `weboptions`.

```
web(char(U))
```

Create URI for Simulink Product Web Page

```
U = matlab.net.URI('//www.mathworks.com/products/simulink/');
U.EncodedURI
```

```
ans =
```

```
string

  "//www.mathworks.com/products/simulink/"
```

See Also

See Also

QueryParameter | RequestMessage | `webread` | `websave` | `webwrite`

External Websites

RFC 3986 Uniform Resource Identifier (URI): Generic Syntax — Section 3.1. Scheme
RFC 3986 Uniform Resource Identifier (URI): Generic Syntax — Section 4.3 Absolute URI

Introduced in R2016b

matlab.net.base64decode

Base 64 decoding of string

Syntax

```
res = base64decode(V)
```

Description

`res = base64decode(V)` decodes `V`, which was encoded using base 64 encoding, and returns the decoded byte array. For more information, see RFC 4648 — Section 4, Base 64 Encoding. Base 64 encoding is used in some contexts in internet messages where arbitrary data must be transmitted in the form of ASCII characters.

In the input string, any characters not in the set of 65 characters defined for base 64 encoding are ignored. Decoding stops at the end of the string or at the first occurrence of an equal sign character (=).

If you know that the encoded data was a character string, you can convert it back to a string using the MATLAB `native2unicode(res)` function. This function uses the user default encoding in effect at the time the string was encoded.

Input Arguments

`V` — Text encoded using base 64

string

Text encoded using base 64, specified as a string.

See Also

See Also

`matlab.net.base64encode` | `native2unicode`

External Websites

RFC 4648 — Section 4, Base 64 Encoding

Introduced in R2016b

matlab.net.base64encode

Base 64 encoding of byte string or vector

Syntax

```
res = base64encode(V)
```

Description

`res = base64encode(V)` encodes `V` using base 64 encoding and returns the encoded characters as a string. For more information, see RFC 4648 — Section 4, Base 64 Encoding. Base 64 encoding is used in some contexts in internet messages where data must be transmitted in a limited set of ASCII characters. Use `base64encode` to encode strings containing special characters that might be misinterpreted as control characters by the transmission protocol. `base64encode` can encode arbitrary binary data.

If `V` is a string or character vector, `base64encode` first converts it to bytes using the user default encoding. To use a different character encoding, call the MATLAB `unicode2native` function to convert `V` to a `uint8` vector before passing it to `base64encode`.

Input Arguments

`V` — Data to encode

string | character vector | numeric vector

Data to encode, specified as a string, character vector, or numeric vector.

See Also

See Also

`matlab.net.base64decode` | `unicode2native`

External Websites

RFC 4648 — Section 4, Base 64 Encoding

Introduced in R2016b

hypot

Square root of sum of squares (hypotenuse)

Syntax

```
C = hypot(A,B)
```

Description

`C = hypot(A,B)` returns the result of the following equation, computed to avoid underflow and overflow:

```
C = sqrt(abs(A).^2 + abs(B).^2)
```

Examples

Compute Hypotenuse

Compute the hypotenuse of a right triangle with side lengths of `3` and `4`.

```
C = hypot(3,4)
```

```
C = 5
```

Overflow and Underflow Behavior

Examine the difference between using `hypot` and coding the basic `hypot` equation in M-code.

Create an anonymous function that performs essentially the same basic function as `hypot`.

```
myhypot = @(a,b)sqrt(abs(a).^2+abs(b).^2);
```

`myhypot` does not have the same consideration for underflow and overflow behavior that `hypot` offers.

Find the upper limit at which `myhypot` returns a useful value. You can see that this test function reaches its maximum at about `1e154`, returning an infinite result at that point.

```
myhypot(1e153,1e153)
```

```
ans = 1.4142e+153
```

```
myhypot(1e154,1e154)
```

```
ans = Inf
```

Do the same using the `hypot` function, and observe that `hypot` operates on values up to about `1e308`, which is approximately equal to the value for `realmax` on your computer (the largest representable double-precision floating-point number).

```
hypot(1e308,1e308)
```

```
ans = 1.4142e+308
```

```
hypot(1e309,1e309)
```

```
ans = Inf
```

Input Arguments

`A,B` — Input arrays
scalars | vectors | matrices | multidimensional arrays

Input arrays, specified as scalars, vectors, matrices, or multidimensional arrays. Inputs `A` and `B` must either be the same size or have sizes that are compatible (for example, `A` is an `M`-by-`N` matrix and `B` is a scalar or `1`-by-`N` row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If neither `A` nor `B` is `Inf`, but one or both inputs is `NaN`, then `hypot` returns `NaN`.

Data Types: `single` | `double`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`abs` | `norm` | `sqrt`

Introduced before R2006a

i

Imaginary unit

Syntax

```
1i
z = a + bi
z = x + 1i*y
```

Description

`1i` returns the basic imaginary unit. `i` is equivalent to `sqrt(-1)`.

You can use `i` to enter complex numbers. You also can use the character `j` as the imaginary unit. To create a complex number without using `i` and `j`, use the `complex` function.

`z = a + bi` returns a complex numerical constant, `z`.

`z = x + 1i*y` returns a complex array, `z`.

Examples

Complex Scalar

Create a complex scalar and use the character, `i`, without a multiplication sign as a suffix in forming a complex numerical constant.

```
z = 1+2i
```

```
z =
   1.0000 + 2.0000i
```

Complex Vector

Create a complex vector from two 4-by-1 vectors of real numbers. `z` is a 4-by-1 complex vector.

```
x = [1:4]';
y = [8:-2:2]';

z = x+1i*y
```

```
z =
   1.0000 + 8.0000i
   2.0000 + 6.0000i
   3.0000 + 4.0000i
   4.0000 + 2.0000i
```

Complex Exponential

Create a complex scalar representing a complex vector with radius, `r`, and angle from the origin, `theta`.

```
r = 4;
theta = pi/4;

z = r*exp(1i*theta)
```

```
z =
   2.8284 + 2.8284i
```

Input Arguments

a — Real component of complex scalar

scalar

Real component of a complex scalar, specified as a scalar.

Data Types: `single` | `double`

b — Imaginary component of complex scalar

scalar

Imaginary component of a complex scalar, specified as a scalar.

If `b` is `double`, you can use the character, `i`, without a multiplication sign as a suffix in forming the complex numerical constant.

Example: `7i`

If `b` is `single`, you must use a multiplication sign when forming the complex numerical constant.

Example: `single(7)*i`

Data Types: `single` | `double`

x — Real component of complex array

scalar | vector | matrix | multidimensional array

Real component of a complex array, specified as a scalar, vector, matrix, or mulitdimensional array.

The size of `x` must match the size of `y`, unless one is a scalar. If either `x` or `y` is a scalar, MATLAB expands the scalar to match the size of the other input.

`single` can combine with `double`.

Data Types: `single` | `double`

y — Imaginary component of complex array

scalar | vector | matrix | multidimensional array

Imaginary component of a complex array, specified as a scalar, vector, matrix, or mulitdimensional array.

The size of `x` must match the size of `y`, unless one is a scalar. If either `x` or `y` is a scalar, MATLAB expands the scalar to match the size of the other input.

`single` can combine with `double`.

Data Types: `single` | `double`

Output Arguments

z — Complex array

scalar | vector | matrix | multidimensional array

Complex array, returned as a scalar, vector, matrix, or multidimensional array.

The size of `z` is the same as the input arguments.

`z` is `single` if at least one input argument is `single`. Otherwise, `z` is `double`.

Tips

- For speed and improved robustness in complex arithmetic, use `1i` and `1j` instead of `i` and `j`.
- Since `i` is a function, it can be overridden and used as a variable. However, it is best to avoid using `i` and `j` for variable names if you intend to use them in complex arithmetic.
- Use the `complex` function to create a complex output in the following cases:
  - When the names `i` and `j` might be used for other variables (and do not equal `sqrt(-1)`)
  - When the inputs are not `double` or `single`
  - When the imaginary component is all zeros

See Also

See Also

`complex` | `conj` | `imag` | `j` | `real`

Topics

"Complex Numbers"

Introduced before R2006a

ichol

Incomplete Cholesky factorization

Syntax

```
L = ichol(A)
L = ichol(A,opts)
```

Description

`L = ichol(A)` performs the incomplete Cholesky factorization of `A` with zero-fill.

`L = ichol(A,opts)` performs the incomplete Cholesky factorization of `A` with options specified by `opts`.

By default, `ichol` references the lower triangle of `A` and produces lower triangular factors.

Input Arguments

A

Sparse matrix

opts

Structure with up to five fields:

Field Name	Summary	Description
`type`	Type of factorization	Indicates which flavor of incomplete Cholesky to perform. Valid values of this field are `'nofill'` and `'ict'`. The `'nofill'` variant performs *incomplete Cholesky with zero-fill* (`IC(0)`). The `'ict'` variant performs *incomplete Cholesky with*

Field Name	Summary	Description
		threshold dropping (ICT). The default value is `'nofill'`.
`droptol`	Drop tolerance when type is `'ict'`	Nonnegative scalar used as a drop tolerance when performing ICT. Elements which are smaller in magnitude than a local drop tolerance are dropped from the resulting factor except for the diagonal element which is never dropped. The local drop tolerance at step `j` of the factorization is `norm(A(j:end,j),1)*droptol`. `'droptol'` is ignored if `'type'` is `'nofill'`. The default value is `0`.
`michol`	Indicates whether to perform modified incomplete Cholesky	Indicates whether or not *modified incomplete Cholesky* (MIC) is performed. The field may be `'on'` or `'off'`. When performing MIC, the diagonal is compensated for dropped elements to enforce the relationship `A*e = L*L'*e` where `e = ones(size(A,2),1)`. The default value is `'off'`.
`diagcomp`	Perform compensated incomplete Cholesky with the specified coefficient	Real nonnegative scalar used as a global diagonal shift `alpha` in forming the incomplete Cholesky factor. That is, instead of performing incomplete Cholesky on `A`, the factorization of `A + alpha*diag(diag(A))` is formed. The default value is `0`.

Field Name	Summary	Description
shape	Determines which triangle is referenced and returned	Valid values are 'upper' and 'lower'. If 'upper' is specified, only the upper triangle of A is referenced and R is constructed such that A is approximated by R'*R. If 'lower' is specified, only the lower triangle of A is referenced and L is constructed such that A is approximated by L*L'. The default value is 'lower'.

Examples

Incomplete Cholesky Factorization

This example generates an incomplete Cholesky factorization.

Start with a symmetric positive definite matrix, A:

```
N = 100;
A = delsq(numgrid('S',N));
```

A is the two-dimensional, five-point discrete negative Laplacian on a 100-by-100 square grid with Dirichlet boundary conditions. The size of A is 98*98 = 9604 (not 10000 as the borders of the grid are used to impose the Dirichlet conditions).

The no-fill incomplete Cholesky factorization is a factorization which contains only nonzeros in the same position as A contains nonzeros. This factorization is extremely cheap to compute. Although the product L*L' is typically very different from A, the product L*L' will match A on its pattern up to round-off.

```
L = ichol(A);
norm(A-L*L','fro')./norm(A,'fro')
```

```
ans = 0.0916
```

```
norm(A-(L*L').*spones(A),'fro')./norm(A,'fro')
```

```
ans = 4.9606e-17
```

`ichol` may also be used to generate incomplete Cholesky factorizations with threshold dropping. As the drop tolerance decreases, the factor tends to get more dense and the product `L*L'` tends to be a better approximation of `A`. The following plots show the relative error of the incomplete factorization plotted against the drop tolerance as well as the ratio of the density of the incomplete factors to the density of the complete Cholesky factor.

```
n = size(A,1);
ntols = 20;
droptol = logspace(-8,0,ntols);
nrm = zeros(1,ntols);
nz = zeros(1,ntols);
nzComplete = nnz(chol(A,'lower'));
for k = 1:ntols
    L = ichol(A,struct('type','ict','droptol',droptol(k)));
    nz(k) = nnz(L);
    nrm(k) = norm(A-L*L','fro')./norm(A,'fro');
end
figure
loglog(droptol,nrm,'LineWidth',2)
title('Drop tolerance vs norm(A-L*L'',''fro'')./norm(A,''fro'')')
```

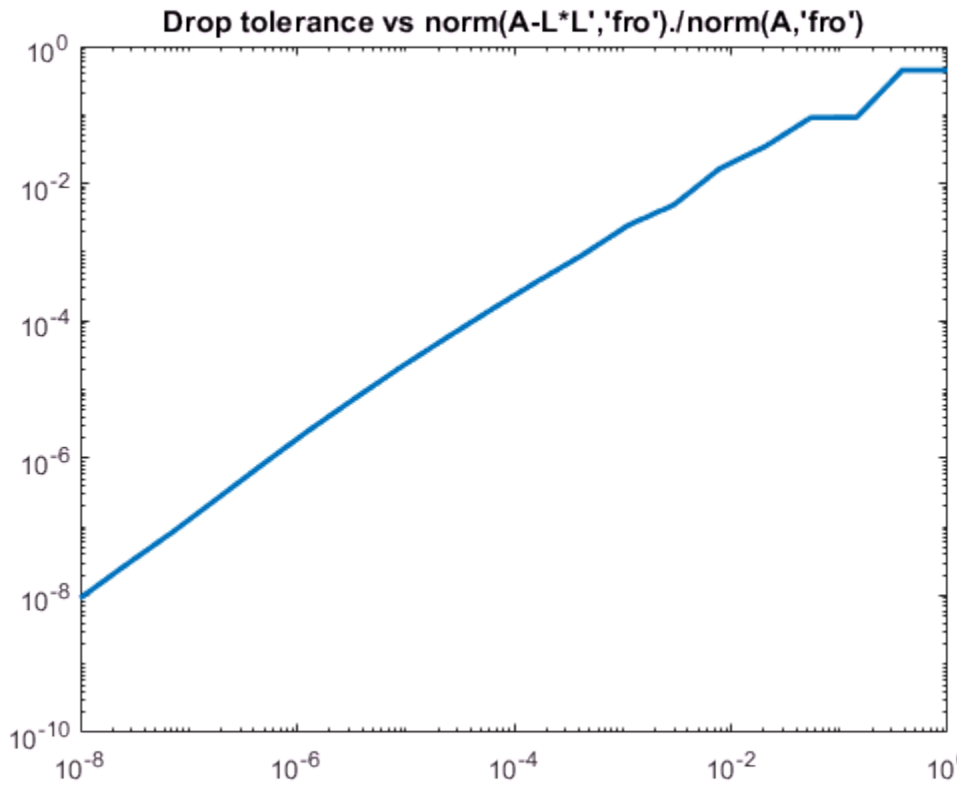


```
figure
semilogx(droptol,nz./nzComplete,'LineWidth',2)
title('Drop tolerance vs fill ratio ichol/chol')
```

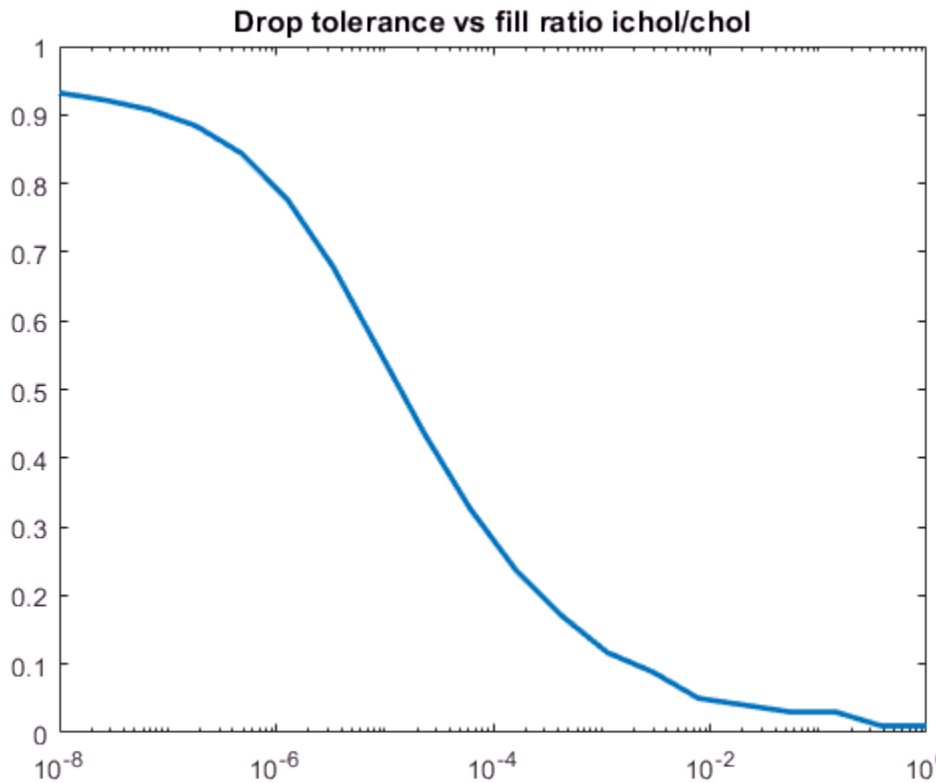

The relative error is typically on the same order as the drop tolerance, although this is not guaranteed.

Using ichol as a Preconditioner

This example shows how to use an incomplete Cholesky factorization as a preconditioner to improve convergence.

Create a symmetric positive definite matrix, A.

```
N = 100;
A = delsq(numgrid('S',N));
```

Create an incomplete Cholesky factorization as a preconditioner for `pcg`. Use a constant vector as the right hand side. As a baseline, execute `pcg` without a preconditioner.

```
b = ones(size(A,1),1);
tol = 1e-6;
maxit = 100;
[x0,fl0,rr0,it0,rv0] = pcg(A,b,tol,maxit);
```

Note that `fl0 = 1` indicating that `pcg` did not drive the relative residual to the requested tolerance in the maximum allowed iterations. Try the no-fill incomplete Cholesky factorization as a preconditioner.

```
L1 = ichol(A);
[x1,fl1,rr1,it1,rv1] = pcg(A,b,tol,maxit,L1,L1');
```

`fl1 = 0`, indicating that `pcg` converged to the requested tolerance and did so in 59 iterations (the value of `it1`). Since this matrix is a discretized Laplacian, however, using modified incomplete Cholesky can create a better preconditioner. A modified incomplete Cholesky factorization constructs an approximate factorization that preserves the action of the operator on the constant vector. That is, `norm(A*e-L*(L'*e))` will be approximately zero for `e = ones(size(A,2),1)` even though `norm(A-L*L','fro')/norm(A,'fro')` is not close to zero. It is not necessary to specify type for this syntax since `nofill` is the default, but it is good practice.

```
opts.type = 'nofill';
opts.michol = 'on';
L2 = ichol(A,opts);
e = ones(size(A,2),1);
norm(A*e-L2*(L2'*e))

ans = 3.7983e-14

[x2,fl2,rr2,it2,rv2] = pcg(A,b,tol,maxit,L2,L2');
```

`pcg` converges (`fl2 = 0`) but in only 38 iterations. Plotting all three convergence histories shows the convergence.

```
semilogy(0:maxit,rv0./norm(b),'b.');
hold on
semilogy(0:it1,rv1./norm(b),'r.');
semilogy(0:it2,rv2./norm(b),'k.');
legend('No Preconditioner','IC(0)','MIC(0)');
```

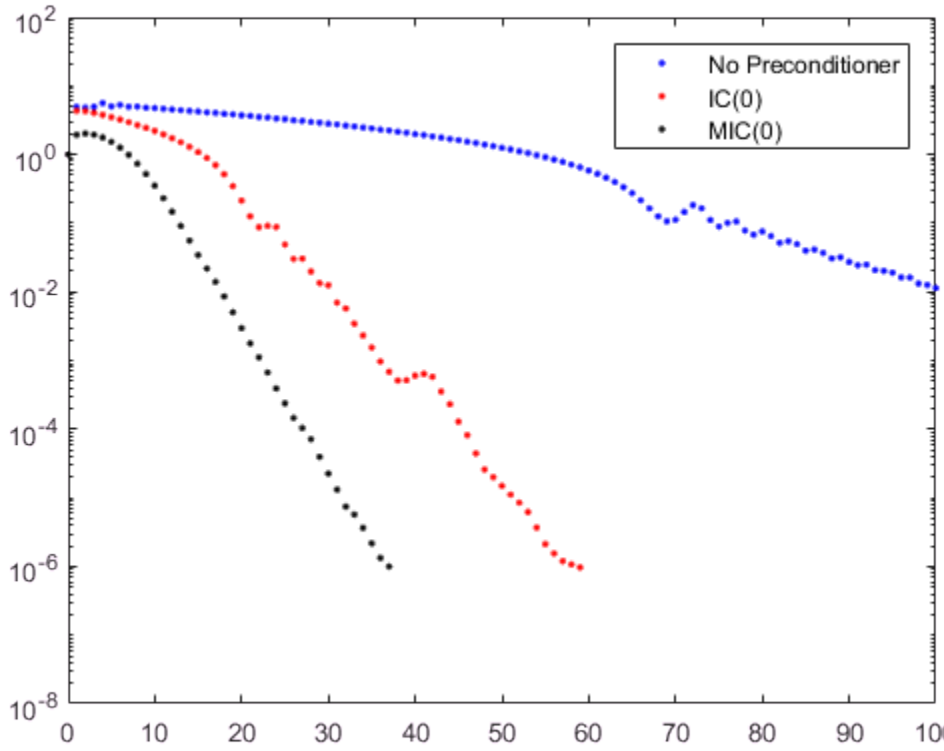

The plot shows that the modified incomplete Cholesky preconditioner creates a much faster convergence.

You can also try incomplete Cholesky factorizations with threshold dropping. The following plot shows convergence of `pcg` with preconditioners constructed with various drop tolerances.

```
L3 = ichol(A, struct('type','ict','droptol',1e-1));
[x3,fl3,rr3,it3,rv3] = pcg(A,b,tol,maxit,L3,L3');
L4 = ichol(A, struct('type','ict','droptol',1e-2));
[x4,fl4,rr4,it4,rv4] = pcg(A,b,tol,maxit,L4,L4');
L5 = ichol(A, struct('type','ict','droptol',1e-3));
[x5,fl5,rr5,it5,rv5] = pcg(A,b,tol,maxit,L5,L5');
```

```
figure
semilogy(0:maxit,rv0./norm(b),'b-','linewidth',2);
hold on
semilogy(0:it3,rv3./norm(b),'b-.','linewidth',2);
semilogy(0:it4,rv4./norm(b),'b--','linewidth',2);
semilogy(0:it5,rv5./norm(b),'b:','linewidth',2);
legend('No Preconditioner','ICT(1e-1)','ICT(1e-2)', ...
   'ICT(1e-3)','Location','SouthEast');
```

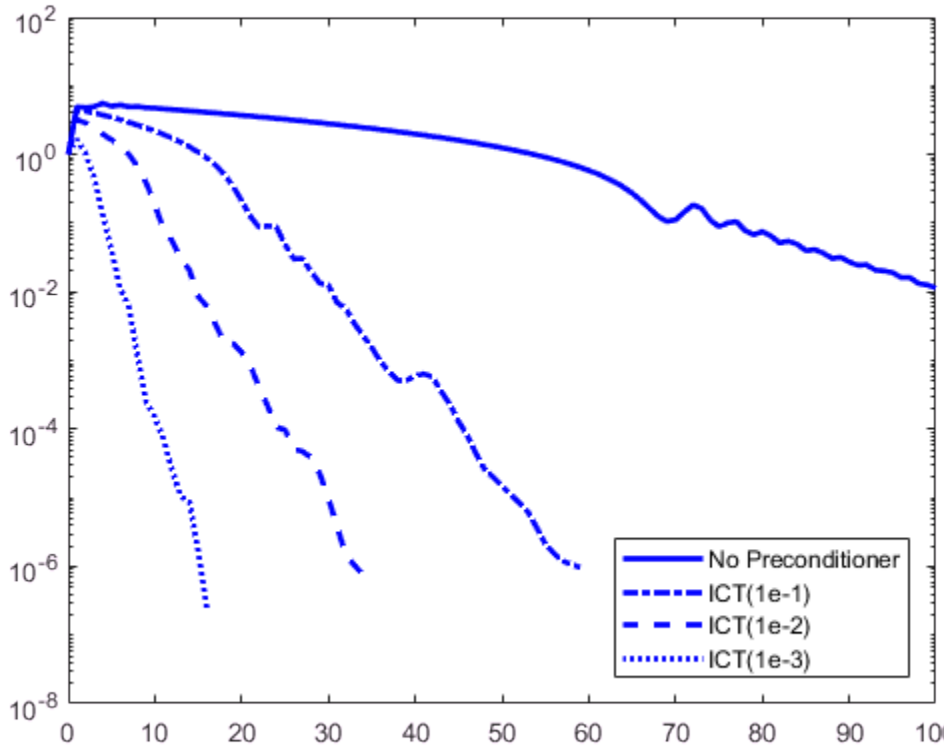

Note the incomplete Cholesky preconditioner constructed with drop tolerance `1e-2` is denoted as `ICT(1e-2)`.

As with the zero-fill incomplete Cholesky, the threshold dropping factorization can benefit from modification (i.e. `opts.michol = 'on'`) since the matrix arises from

an elliptic partial differential equation. As with `MIC(0)`, the modified threshold based dropping incomplete Cholesky will preserve the action of the preconditioner on constant vectors, that is `norm(A*e-L*(L'*e))` will be approximately zero.

Using the diagcomp Option

This example illustrates the use of the `diagcomp` option of `ichol`.

Incomplete Cholesky factorizations of positive definite matrices do not always exist. The following code constructs a random symmetric positive definite matrix and attempts to solve a linear system using `pcg`.

```
S = rng('default');
A = sprandsym(1000,1e-2,1e-4,1);
rng(S);
b = full(sum(A,2));
[x0,fl0,rr0,it0,rv0] = pcg(A,b,1e-6,100);
```

Since convergence is not attained, try to construct an incomplete Cholesky preconditioner.

```
L = ichol(A,struct('type','ict','droptol',1e-3));
```

```
Error using ichol

Encountered nonpositive pivot.
```

If `ichol` breaks down as above, you can use the `diagcomp` option to construct a shifted incomplete Cholesky factorization. That is, instead of constructing `L` such that `L*L'` approximates `A`, `ichol` with diagonal compensation constructs `L` such that `L*L'` approximates `M = A + alpha*diag(diag(A))` without explicitly forming `M`. As incomplete factorizations always exist for diagonally dominant matrices, `alpha` can be found to make `M` diagonally dominant.

```
alpha = max(sum(abs(A),2)./diag(A))-2
```

```
alpha = 62.9341
```

```
L1 = ichol(A, struct('type','ict','droptol',1e-3,'diagcomp',alpha));
[x1,fl1,rr1,it1,rv1] = pcg(A,b,1e-6,100,L1,L1');
```

Here, `pcg` still fails to converge to the desired tolerance within the desired number of iterations, but as the plot below shows, convergence is better for `pcg` with this

preconditioner than with no preconditioner. Choosing a smaller `alpha` may help. With some experimentation, we can settle on an appropriate value for `alpha`.

```
alpha = .1;
L2 = ichol(A, struct('type','ict','droptol',1e-3,'diagcomp',alpha));
[x2,fl2,rr2,it2,rv2] = pcg(A,b,1e-6,100,L2,L2');
```

Now, `pcg` converges and a plot can show the convergence histories with each preconditioner.

```
semilogy(0:100,rv0./norm(b),'b.');
hold on;
semilogy(0:100,rv1./norm(b),'r.');
semilogy(0:it2,rv2./norm(b),'k.');
legend('No Preconditioner','\alpha \approx 63','\alpha = .1');
xlabel('Iteration Number');
ylabel('Relative Residual');
```

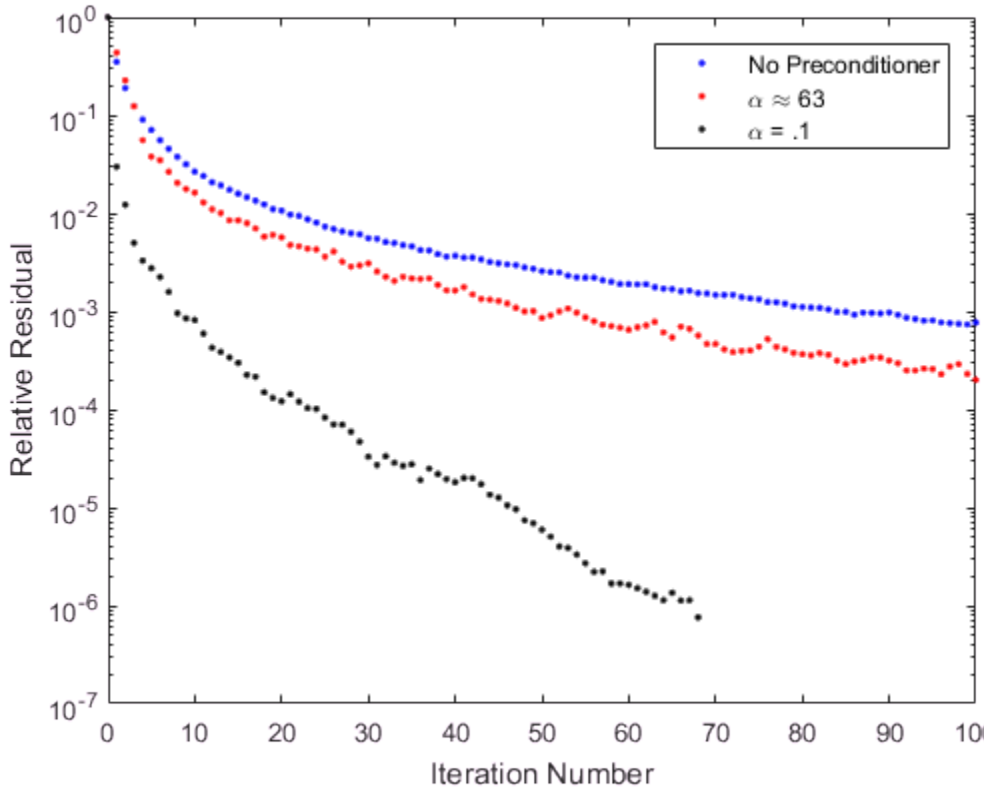

Tips

- The factor given by this routine may be useful as a preconditioner for a system of linear equations being solved by iterative methods such as `pcg` or `minres`.
- `ichol` works only for sparse square matrices

References

[1] Saad, Yousef. “Preconditioning Techniques.” *Iterative Methods for Sparse Linear Systems*. PWS Publishing Company, 1996.

[2] Manteuffel, T.A. “An incomplete factorization technique for positive definite linear systems.” *Math. Comput.* 34, 473–497, 1980.

See Also

`ilu` | `chol` | `pcg` | `minres`

idivide

Integer division with rounding option

Syntax

```
C = idivide(A, B, opt)
C = idivide(A, B)
C = idivide(A, B, 'fix')
C = idivide(A, B, 'round')
C = idivide(A, B, 'floor')
C = idivide(A, B, 'ceil')
```

Description

`C = idivide(A, B, opt)` is the same as `A./B` for integer classes except that fractional quotients are rounded to integers using the optional rounding mode specified by `opt`. The default rounding mode is `'fix'`. Inputs `A` and `B` must be real and must have the same dimensions unless one is a scalar. The arguments `A` and `B` must belong to the same integer class. Alternatively, one of the arguments can be a scalar double, while the other can be any integer type except `int64` or `uint64`. The result `C` belongs to the integer class of the input arguments.

`C = idivide(A, B)` is the same as `A./B` except that fractional quotients are rounded toward zero to the nearest integers.

`C = idivide(A, B, 'fix')` is the same as the syntax shown immediately above.

`C = idivide(A, B, 'round')` is the same as `A./B` for integer classes. Fractional quotients are rounded to the nearest integers.

`C = idivide(A, B, 'floor')` is the same as `A./B` except that fractional quotients are rounded toward negative infinity to the nearest integers.

`C = idivide(A, B, 'ceil')` is the same as `A./B` except that the fractional quotients are rounded toward infinity to the nearest integers.

Examples

```
a = int32([-2 2]);
b = int32(3);

idivide(a,b)             % Returns [0 0]
idivide(a,b,'floor')     % Returns [-1 0]
idivide(a,b,'ceil')      % Returns [0 1]
idivide(a,b,'round')     % Returns [-1 1]
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- For efficient generated code, MATLAB rules for divide by zero are supported only for the `'round'` option.

See Also

See Also

`ceil` | `fix` | `floor` | `ldivide` | `rdivide` | `round`

Topics

“Integers”

"Floating-Point Numbers"

if, elseif, else

Execute statements if condition is true

Syntax

```
if expression
    statements
elseif expression
    statements
else
    statements
end
```

Description

`if expression, statements, end` evaluates an expression, and executes a group of statements when the expression is true. An expression is true when its result is nonempty and contains only nonzero elements (logical or real numeric). Otherwise, the expression is false.

The `elseif` and `else` blocks are optional. The statements execute only if previous expressions in the `if...end` block are false. An `if` block can include multiple `elseif` blocks.

Examples

Use if, elseif, and else for Conditional Assignment

Create a matrix of 1s.

```
nrows = 4;
ncols = 6;
A = ones(nrows,ncols);
```

Loop through the matrix and assign each element a new value. Assign `2` on the main diagonal, `-1` on the adjacent diagonals, and `0` everywhere else.

```
for c = 1:ncols
```

```
    for r = 1:nrows

        if r == c
            A(r,c) = 2;
        elseif abs(r-c) == 1
            A(r,c) = -1;
        else
            A(r,c) = 0;
        end

    end
end
A
```

```
A =

     2    -1     0     0     0     0
    -1     2    -1     0     0     0
     0    -1     2    -1     0     0
     0     0    -1     2    -1     0
```

Compare Arrays

Expressions that include relational operators on arrays, such as `A > 0`, are true only when every element in the result is nonzero.

Test if any results are true using the `any` function.

```
limit = 0.75;
A = rand(10,1)
```

```
A =

    0.8147
    0.9058
    0.1270
    0.9134
    0.6324
    0.0975
    0.2785
    0.5469
    0.9575
    0.9649
```

```
if any(A > limit)
    disp('There is at least one value above the limit.')
else
    disp('All values are below the limit.')
end
```

```
There is at least one value above the limit.
```

Test Arrays for Equality

Compare arrays using `isequal` rather than the `==` operator to test for equality, because `==` results in an error when the arrays are different sizes.

Create two arrays.

```
A = ones(2,3);
B = rand(3,4,5);
```

If `size(A)` and `size(B)` are the same, concatenate the arrays; otherwise, display a warning and return an empty array.

```
if isequal(size(A),size(B))
   C = [A; B];
else
   disp('A and B are not the same size.')
   C = [];
end
```

```
A and B are not the same size.
```

Compare Character Vectors

Use `strcmp` to compare character vectors. Using `==` to test for equality results in an error when the character vectors are different sizes.

```
reply = input('Would you like to see an echo? (y/n): ','s');
if strcmp(reply,'y')
  disp(reply)
end
```

Evaluate Multiple Conditions in Expression

Determine if a value falls within a specified range.

```
x = 10;
```

```
minVal = 2;
maxVal = 6;

if (x >= minVal) && (x <= maxVal)
    disp('Value within specified range.')
elseif (x > maxVal)
    disp('Value exceeds maximum value.')
else
    disp('Value is below minimum value.')
end
```

```
Value exceeds maximum value.
```

Definitions

Expression

An expression can include relational operators (such as `<` or `==`) and logical operators (such as `&&`, `||`, or `~`). Use the logical operators `and` and `or` to create compound expressions. MATLAB evaluates compound expressions from left to right, adhering to operator precedence rules.

Within the conditional expression of an `if...end` block, logical operators `&` and `|` behave as short-circuit operators. This behavior is the same as `&&` and `||`, respectively. Since `&&` and `||` consistently short-circuit in conditional expressions and statements, it is good practice to use `&&` and `||` instead of `&` and `|` within the expression. For example,

```
x = 42;
if exist('myfunction.m','file') && (myfunction(x) >= pi)
    disp('Expressions are true')
end
```

The first part of the expression evaluates to false. Therefore, MATLAB does not need to evaluate the second part of the expression, which would result in an undefined function error.

Tips

- You can nest any number of `if` statements. Each `if` statement requires an `end` keyword.

- Avoid adding a space after `else` within the `elseif` keyword (`else if`). The space creates a nested `if` statement that requires its own `end` keyword.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`for` | `return` | `switch` | `while`

Topics

"Operators and Elementary Operations"

Introduced before R2006a

ifft

Inverse fast Fourier transform

Syntax

```
X = ifft(Y)
X = ifft(Y,n)
X = ifft(Y,n,dim)
X = ifft( ___ ,symflag)
```

Description

`X = ifft(Y)` computes the inverse discrete Fourier transform of `Y` using a fast Fourier transform algorithm. `X` is the same size as `Y`.

- If `Y` is a vector, then `ifft(Y)` returns the inverse transform of the vector.
- If `Y` is a matrix, then `ifft(Y)` returns the inverse transform of each column of the matrix.
- If `Y` is a multidimensional array, then `ifft(Y)` treats the values along the first dimension whose size does not equal 1 as vectors and returns the inverse transform of each vector.

`X = ifft(Y,n)` returns the `n`-point inverse Fourier transform of `Y` by padding `Y` with trailing zeros to length `n`.

`X = ifft(Y,n,dim)` returns the inverse Fourier transform along the dimension `dim`. For example, if `Y` is a matrix, then `ifft(Y,n,2)` returns the `n`-point inverse transform of each row.

`X = ifft( ___ ,symflag)` specifies the symmetry of `Y`. For example, `ifft(Y,'symmetric')` treats `Y` as conjugate symmetric.

Examples

Inverse Transform of Vector

The Fourier transform and its inverse convert between data sampled in time and space and data sampled in frequency.

Create a vector and compute its Fourier transform.

```
X = [1 2 3 4 5];
Y = fft(X)
```

```
Y =
  15.0000 + 0.0000i  -2.5000 + 3.4410i  -2.5000 + 0.8123i  -2.5000 - 0.8123i  -2.5000 -
```

Compute the inverse transform of `Y`, which is the same as the original vector `X`.

```
ifft(Y)
```

```
ans =

     1     2     3     4     5
```

Padded Inverse Transform of Matrix

The `ifft` function allows you to control the size of the transform.

Create a random 5-by-5 matrix and compute the 8-point inverse Fourier transform of each row. Each row of the result has length 8.

```
Y = rand(3,5);
n = 8;
X = ifft(Y,n,2);
size(X)
```

```
ans =

     3     8
```

Conjugate Symmetric Vector

For nearly conjugate symmetric vectors, you can compute the inverse Fourier transform faster by specifying the `'symmetric'` option, which also ensures that the output is real.

Create a vector `Y` that is nearly conjugate symmetric and compute its inverse Fourier transform.

```
V = 1:3;
Y = [V+1e-15i flip(V)]
```

```
Y =
   1.0000 + 0.0000i   2.0000 + 0.0000i   3.0000 + 0.0000i   3.0000 + 0.0000i   2.0000 -
```

```
X = ifft(Y,'symmetric')
```

```
X =

    2.3333   -0.5000   -0.1667         0   -0.1667   -0.5000
```

Input Arguments

Y — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, a matrix, or a multidimensional array. If `Y` is of type `single`, then `ifft` natively computes in single precision, and `X` is also of type `single`. Otherwise, `X` is returned as type `double`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`
Complex Number Support: Yes

n — Inverse transform length

`[ ]` (default) | nonnegative integer scalar

Inverse transform length, specified as `[ ]` or a nonnegative integer scalar. Padding `Y` with zeros by specifying a transform length larger than the length of `Y` can improve the performance of `ifft`. The length is typically specified as a power of 2 or a product of small prime numbers. If `n` is less than the length of the signal, then `ifft` ignores the

remaining signal values past the `n`th entry and returns the truncated result. If `n` is 0, then `ifft` returns an empty matrix.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`

`dim` — Dimension to operate along
positive integer scalar

Dimension to operate along, specified as a positive integer scalar. By default, `dim` is the first array dimension whose size does not equal 1. For example, consider a matrix `Y`.

- `ifft(Y,[],1)` returns the inverse Fourier transform of each column.



- `ifft(Y,[],2)` returns the inverse Fourier transform of each row.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`

`symflag` — Symmetry type
`'nonsymmetric'` (default) | `'symmetric'`

Symmetry type, specified as `'nonsymmetric'` or `'symmetric'`. When `Y` is not exactly conjugate symmetric due to round-off error, `ifft(Y,'symmetric')` treats `Y` as

if it were conjugate symmetric. For more information on conjugate symmetry, see "Algorithms" on page 1-5383.

Definitions

Discrete Fourier Transform of Vector

`Y = fft(X)` and `X = ifft(Y)` implement the Fourier transform and inverse Fourier transform, respectively. For `X` and `Y` of length `n`, these transforms are defined as follows:

$$Y(k) = \sum_{j=1}^{n} X(j) W_n^{(j-1)(k-1)}$$

$$X(j) = \frac{1}{n} \sum_{k=1}^{n} Y(k) W_n^{-(j-1)(k-1)},$$

where

$$W_n = e^{(-2\pi i)/n}$$

is one of n roots of unity.

Algorithms

- The `ifft` function tests whether the vectors in `Y` are conjugate symmetric. A vector `v` is conjugate symmetric when the ith element satisfies `v(i) = conj(v([1,end:-1:2]))`. If the vectors in `Y` are conjugate symmetric, then the inverse transform computation is faster and the output is real.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Output is complex.
- The symmetry type option does not support `'symmetric'`.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

See Also

`fft` | `fftw` | `ifft2` | `ifftn` | `ifftshift`

Introduced before R2006a

ifft2

2-D inverse fast Fourier transform

Syntax

```
X = ifft2(Y)
X = ifft2(Y,m,n)
X = ifft2( ___ ,symflag)
```

Description

`X = ifft2(Y)` returns the two-dimensional discrete inverse Fourier transform of a matrix using a fast Fourier transform algorithm. If `Y` is a multidimensional array, then `ifft2` takes the 2-D inverse transform of each dimension higher than 2. The output `X` is the same size as `Y`.

`X = ifft2(Y,m,n)` truncates `Y` or pads `Y` with trailing zeros to form an `m`-by-`n` matrix before computing the inverse transform. `X` is also `m`-by-`n`. If `Y` is a multidimensional array, then `ifft2` shapes the first two dimensions of `Y` according to `m` and `n`.

`X = ifft2( ___ ,symflag)` specifies the symmetry of `Y`. For example, `ifft2(Y,'symmetric')` treats `Y` as conjugate symmetric.

Examples

2-D Inverse Transform of Matrix

You can use the `ifft2` function to convert 2-D signals sampled in frequency to signals sampled in time or space. The `ifft2` function also allows you to control the size of the transform.

Create a 3-by-3 matrix and compute its Fourier transform.

```
X = magic(3)
```

```
X =
```

```
     8     1     6
     3     5     7
     4     9     2
```

```
Y = fft2(X)
```

```
Y =
  45.0000 + 0.0000i   0.0000 + 0.0000i   0.0000 + 0.0000i
   0.0000 + 0.0000i  13.5000 + 7.7942i   0.0000 - 5.1962i
   0.0000 - 0.0000i   0.0000 + 5.1962i  13.5000 - 7.7942i
```

Take the inverse transform of `Y`, which is the same as the original matrix `X`, up to round-off error.

```
ifft2(Y)
```

```
ans =

    8.0000    1.0000    6.0000
    3.0000    5.0000    7.0000
    4.0000    9.0000    2.0000
```

Pad both dimensions of `Y` with trailing zeros so that the transform has size 8-by-8.

```
Z = ifft2(Y,8,8);
size(Z)
```

```
ans =

     8     8
```

Conjugate Symmetric Matrix

For nearly conjugate symmetric matrices, you can compute the inverse Fourier transform faster by specifying the `'symmetric'` option, which also ensures that the output is real.

Compute the 2-D inverse Fourier transform of a nearly conjugate symmetric matrix.

```
Y = [3+1e-15*i 5;
     5 3];
```

```
X = ifft2(Y,'symmetric')
```

```
X =

     4     0
     0    -1
```

Input Arguments

Y — Input array

matrix | multidimensional array

Input array, specified as a matrix or a multidimensional array. If `Y` is of type `single`, then `ifft2` natively computes in single precision, and `X` is also of type `single`. Otherwise, `X` is returned as type `double`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`
Complex Number Support: Yes

m — Number of inverse transform rows

positive integer scalar

Number of inverse transform rows, specified as a positive integer scalar.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`

n — Number of inverse transform columns

positive integer scalar

Number of inverse transform columns, specified as a positive integer scalar.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`

symflag — Symmetry type

`'nonsymmetric'` (default) | `'symmetric'`

Symmetry type, specified as `'nonsymmetric'` or `'symmetric'`. When `Y` is not exactly conjugate symmetric due to round-off error, `ifft2(Y,'symmetric')` treats `Y` as

if it were conjugate symmetric. For more information on conjugate symmetry, see "Algorithms" on page 1-5388.

Definitions

2-D Inverse Fourier Transform

This formula defines the discrete inverse Fourier transform X of an m-by-n matrix Y:

$$X_{p,q} = \frac{1}{m}\sum_{j=1}^{m}\frac{1}{n}\sum_{k=1}^{n}\omega_m^{jp}\omega_n^{kq}Y_{j,k}$$

ω_m and ω_n are complex roots of unity:

$$\omega_m = e^{2\pi i/m}$$
$$\omega_n = e^{2\pi i/n}$$

i is the imaginary unit. p runs from 1 to m and q runs from 1 to n.

Algorithms

- The `ifft2` function tests whether the vectors in a matrix `Y` are conjugate symmetric in both dimensions. A vector `v` is conjugate symmetric when the ith element satisfies `v(i) = conj(v([1,end:-1:2]))`. If the vectors in `Y` are conjugate symmetric in both dimensions, then the inverse transform computation is faster and the output is real.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support the `'symmetric'` option.

See Also

See Also

`fft2` | `fftw` | `ifft` | `ifftn` | `ifftshift`

Introduced before R2006a

ifftn

Multidimensional inverse fast Fourier transform

Syntax

```
X = ifftn(Y)
X = ifftn(Y,sz)
X = ifftn( ___ ,symflag)
```

Description

`X = ifftn(Y)` returns the multidimensional discrete inverse Fourier transform of an N-D array using a fast Fourier transform algorithm. The N-D inverse transform is equivalent to computing the 1-D inverse transform along each dimension of `Y`. The output `X` is the same size as `Y`.

`X = ifftn(Y,sz)` truncates `Y` or pads `Y` with trailing zeros before taking the inverse transform according to the elements of the vector `sz`. Each element of `sz` defines the length of the corresponding transform dimension. For example, if `Y` is a 5-by-5-by-5 array, then `X = ifftn(Y,[8 8 8])` pads each dimension with zeros, resulting in an 8-by-8-by-8 inverse transform `X`.

`X = ifftn( ___ ,symflag)` specifies the symmetry of `Y`. For example, `ifftn(Y,'symmetric')` treats `Y` as conjugate symmetric.

Examples

3-D Inverse Transform

You can use the `ifftn` function to convert multidimensional data sampled in frequency to data sampled in time or space. The `ifftn` function also allows you to control the size of the transform.

Create a 3-by-3-by-3 array and compute its inverse Fourier transform.

```
Y = rand(3,3,3);
ifftn(Y);
```

Pad the dimensions of Y with trailing zeros so that the transform has size 8-by-8-by-8.

```
X = ifftn(Y,[8 8 8]);
size(X)
```

```
ans =

     8     8     8
```

Conjugate Symmetric Array

For nearly conjugate symmetric arrays, you can compute the inverse Fourier transform faster by specifying the `'symmetric'` option, which also ensures that the output is real.

Compute the 3-D inverse Fourier transform of a nearly conjugate symmetric array.

```
Y(:,:,1) = [1e-15*i 0; 1 0];
Y(:,:,2) = [0 1; 0 1];
X = ifftn(Y,'symmetric')
```

```
X =

(:,:,1) =

    0.3750   -0.1250
   -0.1250   -0.1250


(:,:,2) =

   -0.1250    0.3750
   -0.1250   -0.1250
```

Input Arguments

Y — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, a matrix, or a multidimensional array. If Y is of type `single`, then `ifftn` natively computes in single precision, and X is also of type `single`. Otherwise, X is returned as type `double`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`
Complex Number Support: Yes

`sz` — Lengths of inverse transform dimensions
vector of positive integers

Lengths of inverse transform dimensions, specified as a vector of positive integers.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `logical`

`symflag` — Symmetry type
`'nonsymmetric'` (default) | `'symmetric'`

Symmetry type, specified as `'nonsymmetric'` or `'symmetric'`. When `Y` is not exactly conjugate symmetric due to round-off error, `ifftn(Y,'symmetric')` treats `Y` as if it were conjugate symmetric. For more information on conjugate symmetry, see "Algorithms" on page 1-5392.

Definitions

N-D Inverse Fourier Transform

The discrete inverse Fourier transform X of an N-D array Y is defined as

$$X_{p_1,p_2,\ldots,p_N} = \sum_{j_1=1}^{m_1} \frac{1}{m_1} \omega_{m_1}^{p_1 j_1} \sum_{j_2=1}^{m_2} \frac{1}{m_2} \omega_{m_2}^{p_2 j_2} \ldots \sum_{j_N=1}^{m_N} \frac{1}{m_N} \omega_{m_N}^{p_N j_N} Y_{j_1,j_2,\ldots,j_N} .$$

Each dimension has length m_k for $k = 1,2,\ldots,N$, and $\omega_{m_k} = e^{2\pi i/m_k}$ are complex roots of unity where i is the imaginary unit.

Algorithms

- The `ifftn` function tests whether the vectors in an array `Y` are conjugate symmetric in all dimensions. A vector `v` is conjugate symmetric when the ith element satisfies

`v(i) = conj(v([1,end:-1:2]))`. If the vectors in `Y` are conjugate symmetric in all dimensions, then the inverse transform computation is faster and the output is real.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support the `'symmetric'` option.
- The `sz` argument must have a fixed size.

See Also

See Also

`fftn` | `fftw` | `ifft` | `ifft2` | `ifftshift`

Introduced before R2006a

ifftshift

Inverse zero-frequency shift

Syntax

```
X = ifftshift(Y)
X = ifftshift(Y,dim)
```

Description

`X = ifftshift(Y)` rearranges a zero-frequency-shifted Fourier transform `Y` back to the original transform output. In other words, `ifftshift` undoes the result of `fftshift`.

- If `Y` is a vector, then `ifftshift` swaps the left and right halves of `Y`.
- If `Y` is a matrix, then `ifftshift` swaps the first quadrant of `Y` with the third, and the second quadrant with the fourth.
- If `Y` is a multidimensional array, then `ifftshift` swaps half-spaces of `Y` along each dimension.

`X = ifftshift(Y,dim)` operates along the dimension `dim` of `Y`. For example, if `Y` is a matrix whose rows represent multiple 1-D transforms, then `ifftshift(Y,2)` swaps the halves of each row of `Y`.

Examples

Inverse Shift Vector Elements

You can use the `fftshift` and `ifftshift` functions to swap left and right halves of a vector.

Create a vector containing an odd number of elements, and swap the left and right sides of the vector using the `fftshift` function.

```
V = [1 2 3 4 5 6 7];
X = fftshift(V)
```

```
X =

     5     6     7     1     2     3     4
```

Use the `ifftshift` function to swap the left and right sides of `X`. The result is the same as the original vector `V`.

```
Y = ifftshift(X)
```

```
Y =

     1     2     3     4     5     6     7
```

Calling the `fftshift` function twice does not necessarily reconstruct the original input.

```
fftshift(fftshift(V))
```

```
ans =

     2     3     4     5     6     7     1
```

Inverse Shift Matrix Rows

Rearrange the rows of a matrix to shift the nonnegative elements to the left.

```
Y = [-2 -1 0 1 2;
    -10 -5 0 5 10];
X = ifftshift(Y,2)
```

```
X =

     0     1     2    -2    -1
     0     5    10   -10    -5
```

Input Arguments

Y — Input array
vector | matrix | multidimensional array

Input array, specified as a vector, a matrix, or a multidimensional array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

`dim` — Dimension to operate along
positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then `ifftshift` swaps along all dimensions.

- Consider an input matrix `Yc`. The operation `ifftshift(Yc,1)` swaps halves of each column of `Yc`.



- Consider an input matrix `Yr`. The operation `ifftshift(Yr,1)` swaps halves of each row of `Yr`.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`fft` | `fft2` | `fftn` | `fftshift` | `fftw`

Introduced before R2006a

ilu

Incomplete LU factorization

Syntax

```
ilu(A,setup)
[L,U] = ilu(A,setup)
[L,U,P] = ilu(A,setup)
```

Description

`ilu` produces a unit lower triangular matrix, an upper triangular matrix, and a permutation matrix.

`ilu(A,setup)` computes the incomplete LU factorization of `A`. `setup` is an input structure with up to five setup options. The fields must be named exactly as shown in the table below. You can include any number of these fields in the structure and define them in any order. Any additional fields are ignored.

Field Name	Description
`type`	Type of factorization. Values for `type` include: • `'nofill'`(default)—Performs ILU factorization with `0` level of fill in, known as ILU(0). With `type` set to `'nofill'`, only the `milu` setup option is used; all other fields are ignored. • `'crout'`—Performs the Crout version of ILU factorization, known as ILUC. With `type` set to `'crout'`, only the `droptol` and `milu` setup options are used; all other fields are ignored. • `'ilutp'` —Performs ILU factorization with threshold and pivoting. If `type` is not specified, the ILU factorization with `0` level of fill in is performed. Pivoting is only performed with `type` set to `'ilutp'`.
`droptol`	Drop tolerance of the incomplete LU factorization. `droptol` is a non-negative scalar. The default value is `0`, which produces the complete LU factorization.

Field Name	Description

	The nonzero entries of `U` satisfy
	`abs(U(i,j)) >= droptol*norm(A(:,j)),`
	with the exception of the diagonal entries, which are retained regardless of satisfying the criterion. The entries of `L` are tested against the local drop tolerance before being scaled by the pivot, so for nonzeros in `L`
	`abs(L(i,j)) >= droptol*norm(A(:,j))/U(j,j).`

`milu`	Modified incomplete LU factorization. Values for `milu` include: • `'row'`—Produces the row-sum modified incomplete LU factorization. Entries from the newly-formed column of the factors are subtracted from the diagonal of the upper triangular factor, `U`, preserving column sums. That is, `A*e = L*U*e`, where `e` is the vector of ones. • `'col'`—Produces the column-sum modified incomplete LU factorization. Entries from the newly-formed column of the factors are subtracted from the diagonal of the upper triangular factor, `U`, preserving column sums. That is, `e'*A = e'*L*U`. • `'off'` (default)—No modified incomplete LU factorization is produced.
`udiag`	If `udiag` is `1`, any zeros on the diagonal of the upper triangular factor are replaced by the local drop tolerance. The default is `0`.
`thresh`	Pivot threshold between `0` (forces diagonal pivoting) and `1`, the default, which always chooses the maximum magnitude entry in the column to be the pivot.

`ilu(A,setup)` returns `L+U-speye(size(A))`, where `L` is a unit lower triangular matrix and `U` is an upper triangular matrix.

`[L,U] = ilu(A,setup)` returns a unit lower triangular matrix in `L` and an upper triangular matrix in `U`.

`[L,U,P] = ilu(A,setup)` returns a unit lower triangular matrix in `L`, an upper triangular matrix in `U`, and a permutation matrix in `P`.

Limitations

`ilu` works on sparse square matrices only.

Examples

Start with a sparse matrix and compute the LU factorization.

```
A = gallery('neumann', 1600) + speye(1600);
setup.type = 'crout';
setup.milu = 'row';
setup.droptol = 0.1;
[L,U] = ilu(A,setup);
e = ones(size(A,2),1);
norm(A*e-L*U*e)

ans =

  1.4251e-014
```

This shows that `A` and `L*U`, where `L` and `U` are given by the modified Crout `ILU`, have the same row-sum.

Start with a sparse matrix and compute the LU factorization.

```
A = gallery('neumann', 1600) + speye(1600);
setup.type = 'nofill';
nnz(A)
ans =

        7840

nnz(lu(A))
ans =

      126478

nnz(ilu(A,setup))
ans =

        7840
```

This shows that A has 7840 nonzeros, the complete LU factorization has 126478 nonzeros, and the incomplete LU factorization, with 0 level of fill-in, has 7840 nonzeros, the same amount as A.

Tips

These incomplete factorizations may be useful as preconditioners for a system of linear equations being solved by iterative methods such as BICG (BiConjugate Gradients), GMRES (Generalized Minimum Residual Method).

References

[1] Saad, Yousef, *Iterative Methods for Sparse Linear Systems*, PWS Publishing Company, 1996, Chapter 10 - Preconditioning Techniques.

See Also

`bicg` | `ichol` | `gmres`

im2double

Convert image to double precision

Syntax

```
I2 = im2double(I)
I2 = im2double(I,'indexed')
```

Description

`I2 = im2double(I)` converts the intensity image `I` to double precision, rescaling the data if necessary. `I` can be a grayscale intensity image, a truecolor image, or a binary image.

If the input image is of class `double`, then the output image is identical.

`I2 = im2double(I,'indexed')` converts the indexed image `I` to double precision, offsetting the data if necessary.

Examples

Convert Image to Double Precision

```
I = imread('peppers.png');
whos I
```

```
  Name        Size                Bytes  Class    Attributes

  I         384x512x3            589824  uint8
```

```
I2 = im2double(I);
whos I2
```

```
  Name        Size                 Bytes  Class     Attributes

  I2        384x512x3            4718592  double
```

Convert Image to Double Precision on GPU

Convert an array to class `double` on the GPU. This example requires the Parallel Computing Toolbox.

```
I1 = gpuArray(reshape(uint8(linspace(1,255,25)),[5 5]));
I2 = im2double(I1);
```

Input Arguments

`I` — Input image

scalar | vector | matrix | multidimensional array

Input image, specified as a scalar, vector, matrix, or multidimensional array.

- If `I` is an intensity or truecolor image, it can be `uint8`, `uint16`, `double`, `logical`, `single`, or `int16`.
- If `I` is an indexed image, it can be `uint8`, `uint16`, `double` or `logical`.
- If `I` is a binary image, it must be `logical`.

If the Parallel Computing Toolbox is installed, `I` can be a gpuArray and `im2double` converts `I` on a GPU.

Data Types: `single` | `double` | `int16` | `uint8` | `uint16` | `logical`

Tips

- `im2double` supports the generation of efficient, production-quality C/C++ code if you have MATLAB Coder™ installed.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`double` | `gpuArray` | `im2int16` | `im2single` | `im2uint16` | `im2uint8`

im2frame

Convert image to movie frame

Syntax

```
f = im2frame(X,map)
f = im2frame(X)
```

Description

`f = im2frame(X,map)` converts the indexed image, `X`, and the associated colormap, `map`, into a movie frame `f`.

- If you specify `X` as an m-by-n array of integers, then `im2frame` uses the associated colormap, `map`, where `map` is a three-column array of values in the range [0,1]. Each row of `map` is a three-element RGB triplet that specifies the red, green, and blue components of a single color of the colormap.
- If you specify `X` as an m-by-n-by-3 truecolor image, then `map` is optional and has no effect.

`f = im2frame(X)` converts the indexed image, `X`, into a movie frame `f` using the current colormap if `X` contains an indexed image.

For more information on image types, see “Image Types”.

Class Support

`X` must be of class `uint8` or `double`.

Examples

Convert Image Sequence to Movie

Use `im2frame` to convert a sequence of images into a movie.

```
F(1) = im2frame(X1,map);
F(2) = im2frame(X2,map);
 ...
F(n) = im2frame(Xn,map);
movie(F)
```

See Also

frame2im | movie

Introduced before R2006a

im2java

Convert image to Java image

Syntax

```
jimage = im2java(I)
jimage = im2java(X,MAP)
jimage = im2java(RGB)
```

Description

To work with a MATLAB image in the Java environment, you must convert the image from its MATLAB representation into an instance of the Java image class, `java.awt.Image`.

`jimage = im2java(I)` converts the intensity image `I` to an instance of the Java image class, `java.awt.Image`.

`jimage = im2java(X,MAP)` converts the indexed image `X`, with colormap `MAP`, to an instance of the Java image class, `java.awt.Image`.

`jimage = im2java(RGB)` converts the RGB image `RGB` to an instance of the Java image class, `java.awt.Image`.

Class Support

The input image can be of class `uint8`, `uint16`, or `double`.

Note Java requires `uint8` data to create an instance of the Java image class, `java.awt.Image`. If the input image is of class `uint8`, `jimage` contains the same `uint8` data. If the input image is of class `double` or `uint16`, `im2java` makes an equivalent image of class `uint8`, rescaling or offsetting the data as necessary, and then converts this `uint8` representation to an instance of the Java image class, `java.awt.Image`.

Examples

This example reads an image into the MATLAB workspace and then uses `im2java` to convert it into an instance of the Java image class.

```
I = imread('ngc6543a.jpg');
javaImage = im2java(I);
frame = javax.swing.JFrame;
icon = javax.swing.ImageIcon(javaImage);
label = javax.swing.JLabel(icon);
frame.getContentPane.add(label);
frame.pack
frame.show
```

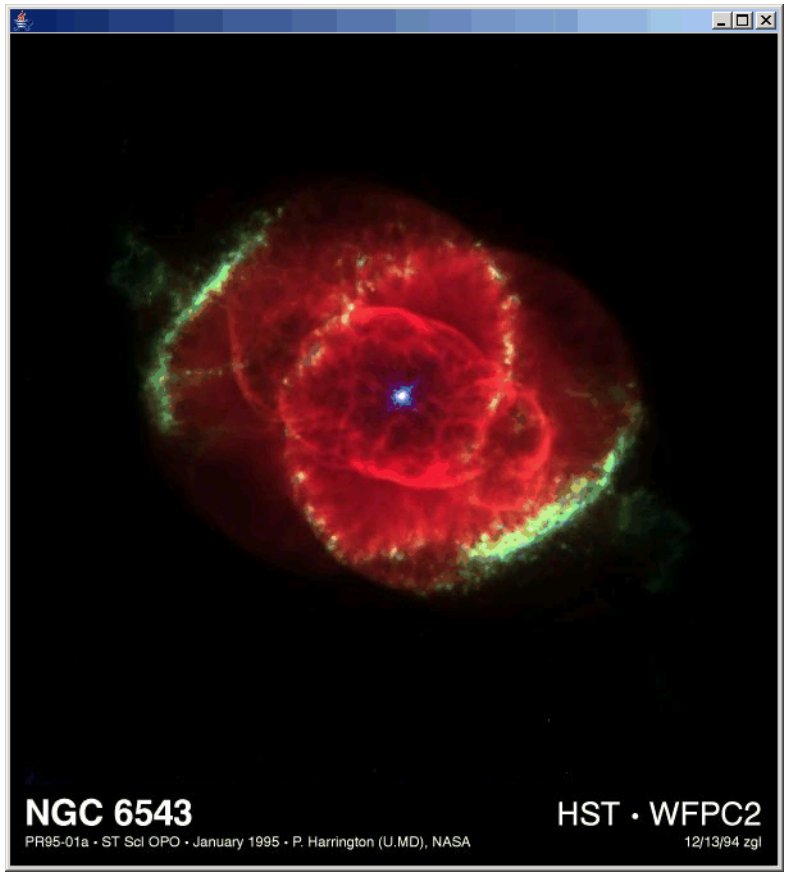

See Also

Introduced before R2006a

imag

Imaginary part of complex number

Syntax

```
Y = imag(Z)
```

Description

`Y = imag(Z)` returns the imaginary part of the elements of array `Z`.

Examples

Imaginary Part of Complex Number

Find the imaginary part of the complex number, `Z`.

```
Z = 2+3i;
```

```
Y = imag(Z)
```

```
Y = 3
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`conj` | `i` | `j` | `real`

Introduced before R2006a

image

Display image from array

Syntax

```
image(C)
image(x,y,C)
image('CData',C)
image('XData',x,'YData',y,'CData',C)

image( ___ ,Name,Value)
image(ax, ___ )

im = image( ___ )
```

Description

`image(C)` displays the data in array `C` as an image. Each element of `C` specifies the color for 1 pixel of the image. The resulting image is an `m`-by-`n` grid of pixels where `m` is the number of columns and `n` is the number of rows in `C`. The row and column indices of the elements determine the centers of the corresponding pixels.

`image(x,y,C)` specifies the image location. Use `x` and `y` to specify the locations of the corners corresponding to `C(1,1)` and `C(m,n)`. To specify both corners, set `x` and `y` as two-element vectors. To specify the first corner and let `image` determine the other, set `x` and `y` as scalar values. The image is stretched and oriented as applicable.

`image('CData',C)` adds the image to the current axes without replacing existing plots. This syntax is the low-level version of `image(C)`. For more information, see "High-Level Versus Low-Level Version of Image" on page 1-5428.

`image('XData',x,'YData',y,'CData',C)` specifies the image location. This syntax is the low-level version of `image(x,y,C)`.

`image( ___ ,Name,Value)` specifies image properties using one or more name-value pair arguments. You can specify image properties with any of the input argument combinations in the previous syntaxes.

`image(ax, ___ )` creates the image in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`im = image( ___ )` returns the `Image` object created. Use `im` to set properties of the image after it is created. You can specify this output with any of the input argument combinations in the previous syntaxes. For a list of image properties and descriptions, see Image Properties.

Examples

Display Image of Matrix Data

Create matrix `C`. Display an image of the data in `C`. Add a colorbar to the graph to show the current colormap.

```
C = [0 2 4 6; 8 10 12 14; 16 18 20 22];
image(C)
colorbar
```

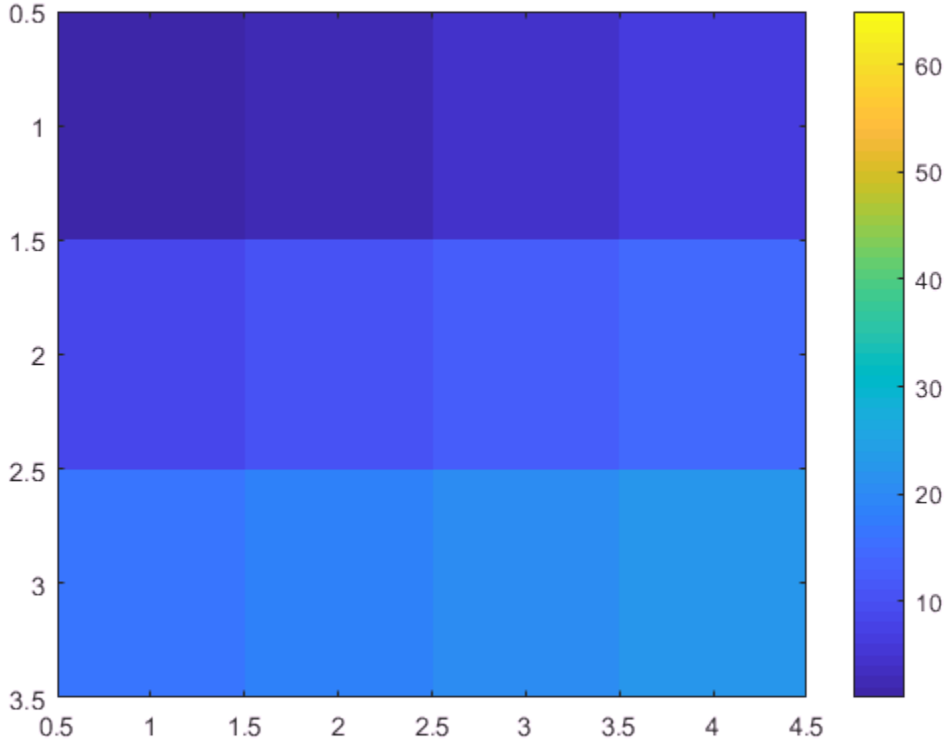

By default, the `CDataMapping` property for the image is set to `'direct'` so `image` interprets values in `C` as indices into the colormap. For example, the bottom right pixel corresponding to the last element in `C`, 22, uses the 22nd color of the colormap.

Scale the values to the full range of the current colormap by setting the `CDataMapping` property to `'scaled'` when creating the image.

```
image(C,'CDataMapping','scaled')
colorbar
```

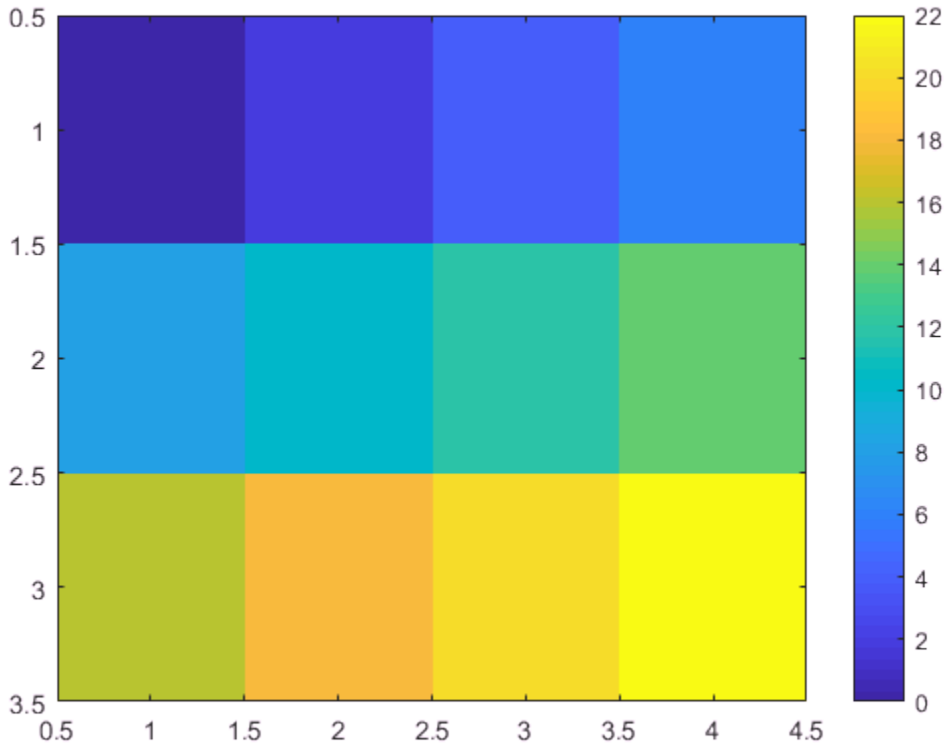

Alternatively, you can use the `imagesc` function to scale the values instead of using `image(C,'CDataMapping','scaled')`. For example, use `imagesc(C)`.

Control Image Placement

Place the image so that it lies between 5 and 8 on the *x*-axis and between 3 and 6 on the *y*-axis.

```
x = [5 8];
y = [3 6];
C = [0 2 4 6; 8 10 12 14; 16 18 20 22];
image(x,y,C)
```

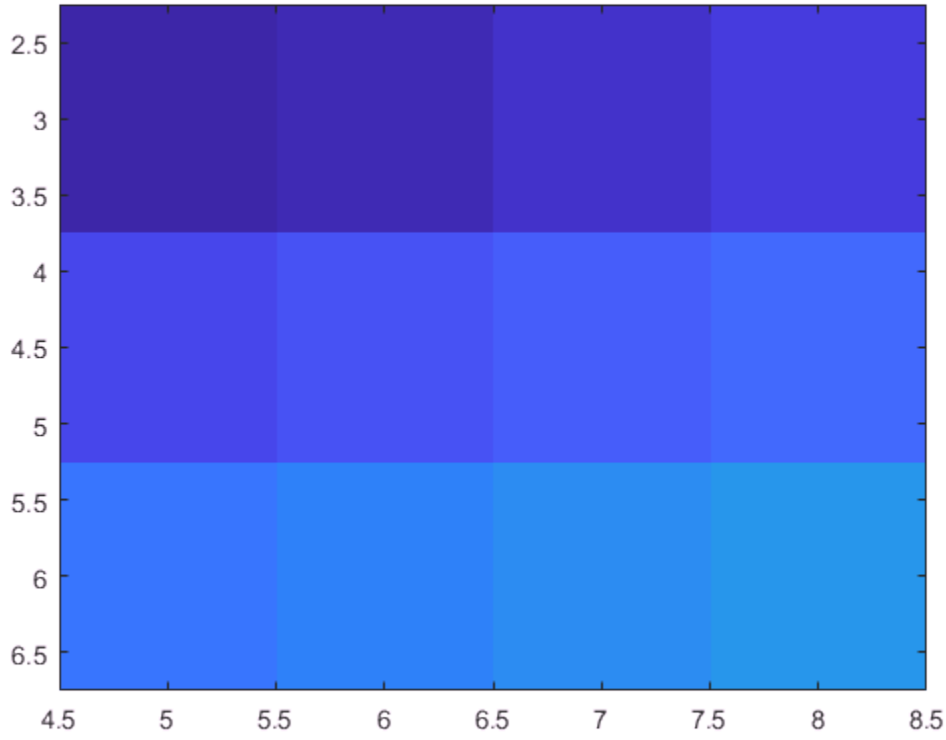

Notice that the pixel corresponding to C(1,1) is centered over the point (5,3). The pixel corresponding to C(3,4) is centered over the point (8,6). `image` positions and orients the rest of the image between those two points.

Display Image of 3-D Array of True Colors

Create `C` as a 3-D array of true colors. Use only red colors by setting the last two pages of the array to zeros.

```
C = zeros(3,3,3);
C(:,:,1) = [.1 .2 .3; .4 .5 .6; .7 .8 .9]
```

```
C =
```

```
(:,:,1) =

    0.1000    0.2000    0.3000
    0.4000    0.5000    0.6000
    0.7000    0.8000    0.9000


(:,:,2) =

     0     0     0
     0     0     0
     0     0     0


(:,:,3) =

     0     0     0
     0     0     0
     0     0     0
```

Display an image of the data in `C`.

```
image(C)
```

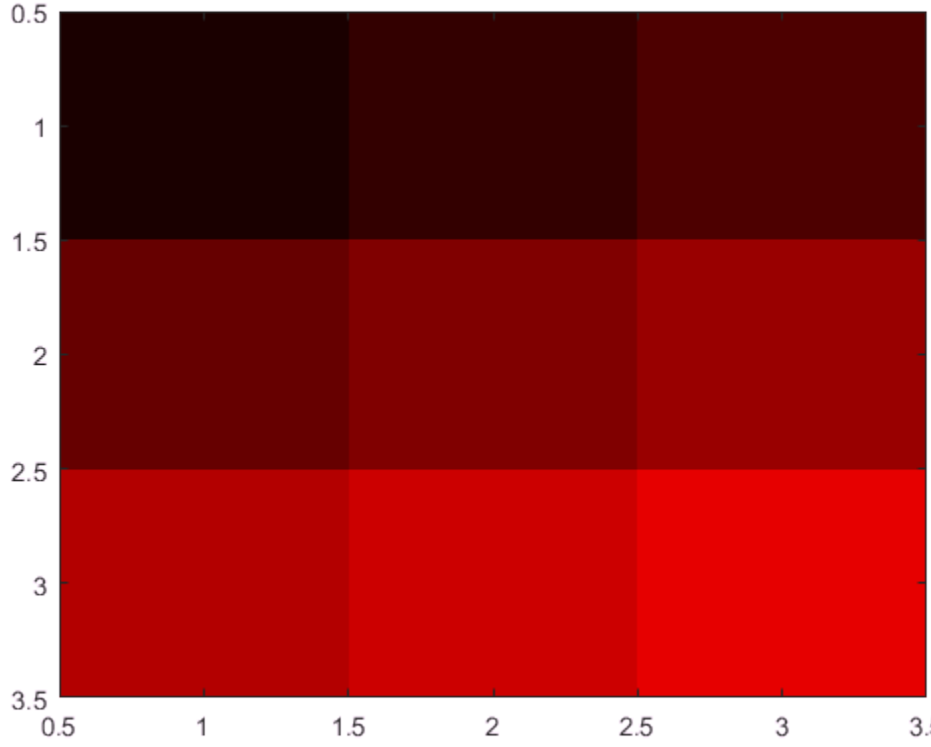

Modify Image After Creation

Plot a line, and then create an image on top of the line. Return the image object.

```
plot(1:3)
hold on
C = [1 2 3; 4 5 6; 7 8 9];
im = image(C);
```

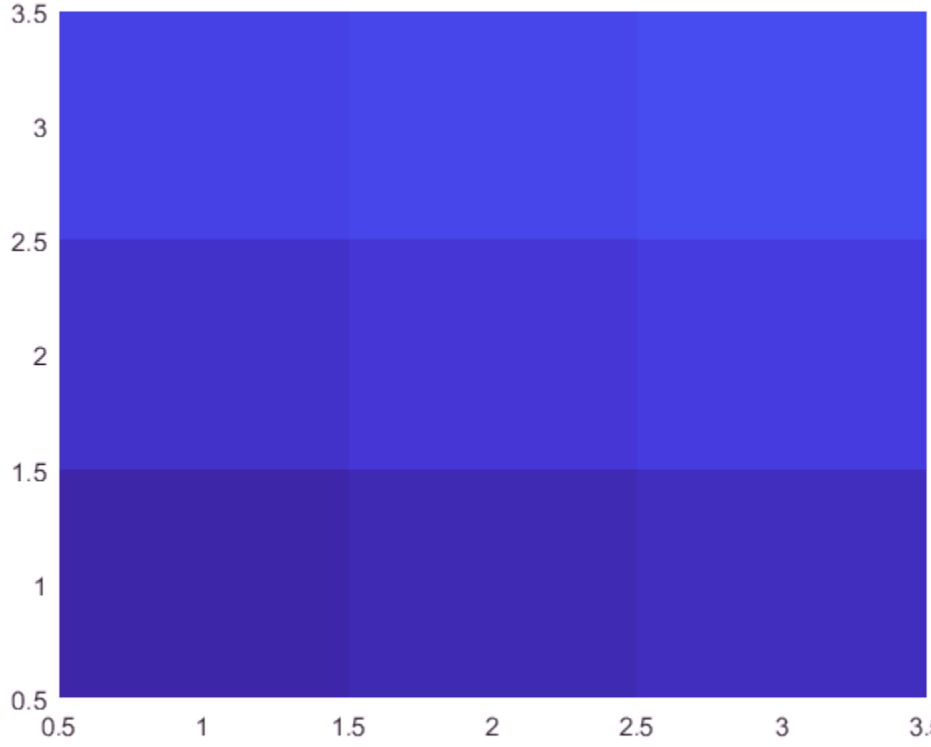

Make the image semitransparent so that the line shows through the image.

```
im.AlphaData = 0.5;
```

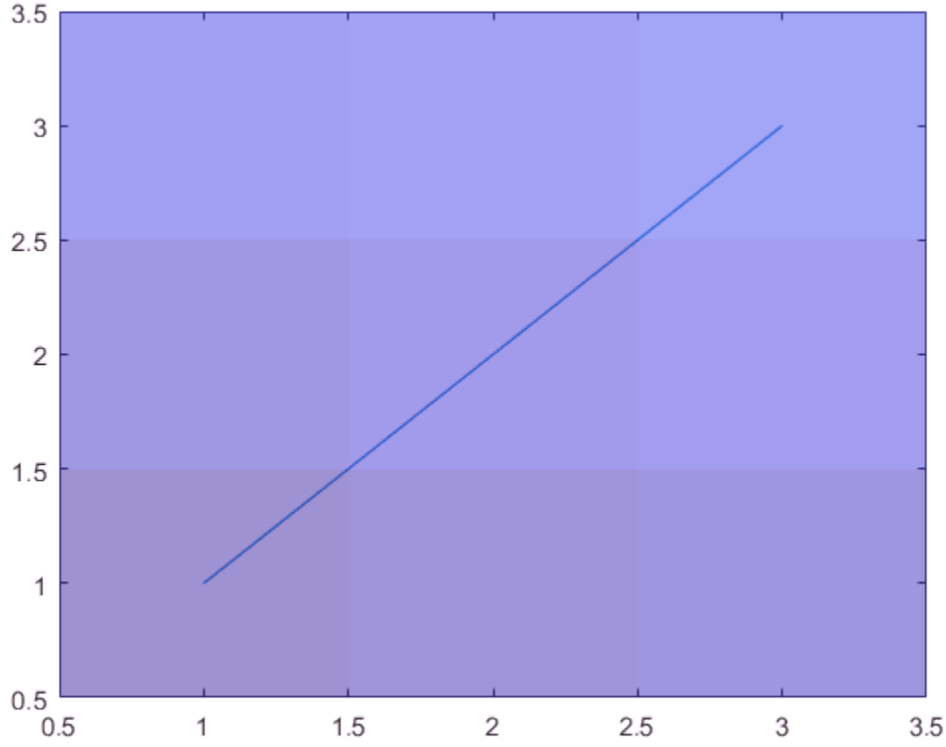

Read and Display JPEG Image File

Read a JPEG image file.

```
C = imread('ngc6543a.jpg');
```

`imread` returns a 650-by-600-by-3 array, `C`.

Display the image.

```
image(C)
```

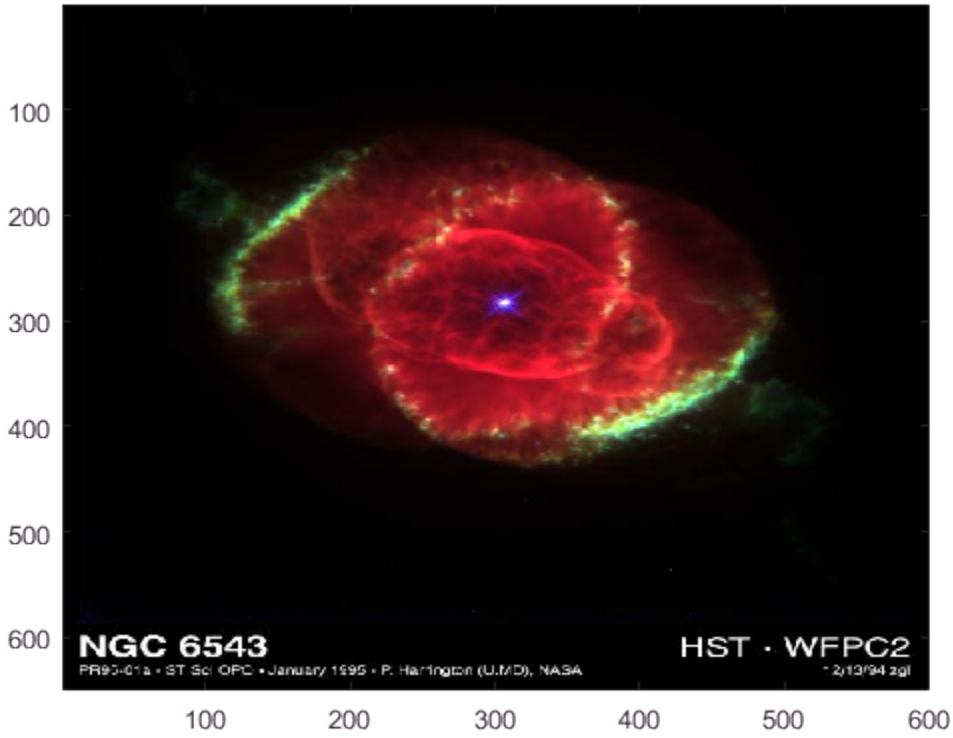

Add Image to Axes in 3-D View

Create a surface plot. Then, add an image under the surface. `image` displays the image in the *xy*-plane.

```
Z = 10 + peaks;
surf(Z)
hold on
image(Z,'CDataMapping','scaled')
```

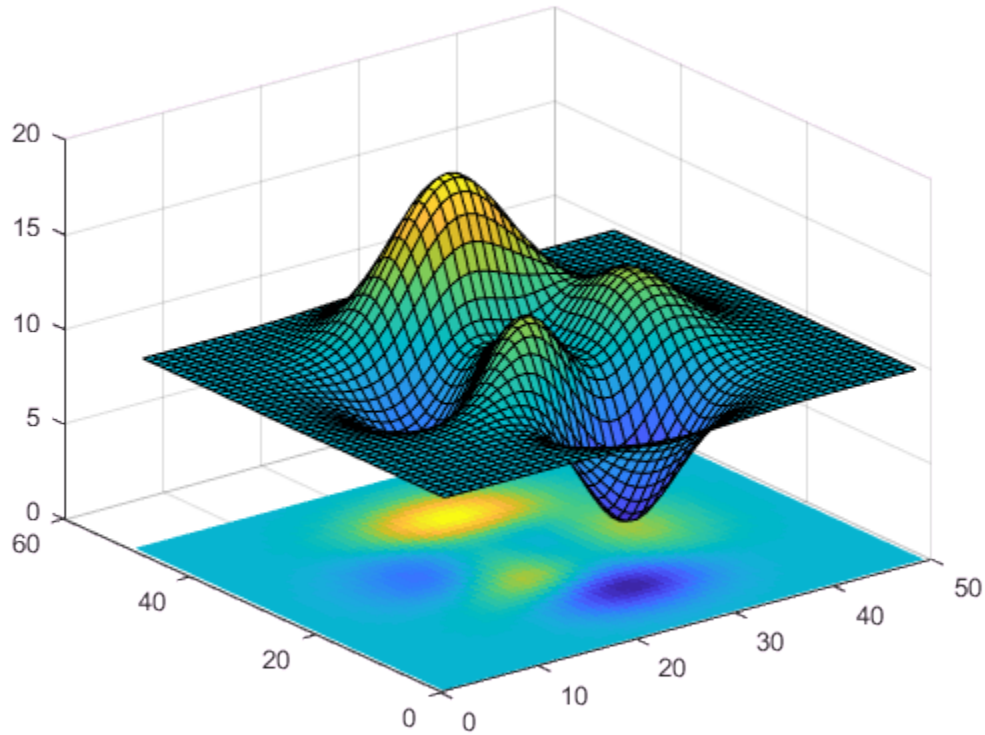

Input Arguments

C — Image color data

vector or matrix | 3-D array of RGB triplets

Image color data, specified in one of these forms:

- Vector or matrix — This format defines indexed image data. Each element of `C` defines a color for 1 pixel of the image. For example, `C = [1 2 3; 4 5 6; 7 8 9];`. The elements of `C` map to colors in the colormap of the associated axes. The `CDataMapping` property controls the mapping method.

- 3-D array of RGB triplets — This format defines true color image data using RGB triplet values. Each RGB triplet defines a color for 1 pixel of the image. An RGB triplet is a three-element vector that specifies the intensities of the red, green, and blue components of the color. The first page of the 3-D array contains the red components, the second page contains the green components, and the third page contains the blue components. Since the image uses true colors instead of colormap colors, the `CDataMapping` property has no effect.

  - If `C` is of type `double`, then an RGB triplet value of `[0 0 0]` corresponds to black and `[1 1 1]` corresponds to white.
  - If `C` is an integer type, then the image uses the full range of data to determine the color. For example, if `C` is of type `uint8`, then `[0 0 0]` corresponds to black and `[255 255 255]` corresponds to white. If `CData` is of type `int8`, then `[-128 -128 -128]` corresponds to black and `[127 127 127]` corresponds to white.
  - If `C` is of type `logical`, then `[0 0 0]` corresponds to black and `[1 1 1]` corresponds to white.

This illustration shows the relative dimensions of `C` for the two color models.

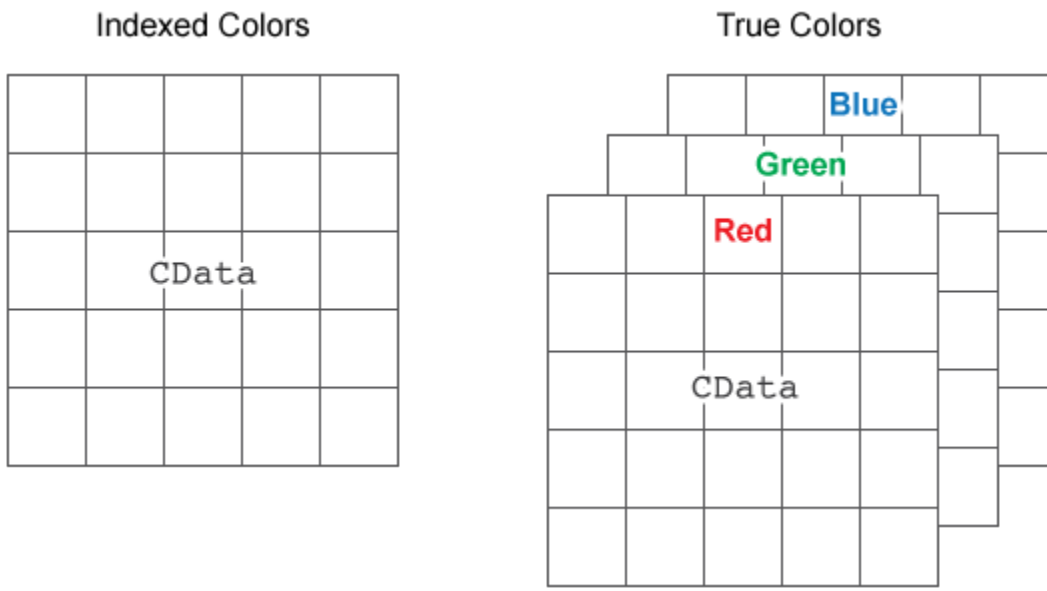

The behavior of `NaN` elements is not defined.

To use the low-level version of the `image` function instead, set the CData property as a name-value pair. For example, `image('CData',C)`.

Converting Between Data Types

To convert indexed image data from an integer type to type `double`, add 1. For example, if `X8` is indexed image data of type `uint8`, convert it to type `double` using:

```
X64 = double(X8) + 1;
```

To convert indexed image data from type `double` to an integer type, subtract 1 and use `round` to ensure that all the values are integers. For example, if `X64` is indexed image data of type `double`, convert it to `uint8` using:

```
X8 = uint8(round(X64 - 1));
```

To convert true color image data from an integer type to type `double`, rescale the data. For example, if `RGB8` is true color image data of type `uint8`, convert it to `double` using:

```
RGB64 = double(RGB8)/255;
```

To convert true color image data from type `double` to an integer type, rescale the data and use `round` to ensure that all the values are integers. For example, if `RGB64` is image data of type `double`, convert it to `uint8` using:

```
RGB8 = uint8(round(RGB64*255));
```

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

x — Placement along x-axis

`[1 size(C,2)]` (default) | two-element vector | scalar

Placement along the *x*-axis, specified in one of these forms:

- Two-element vector — Use the first element as the location for the center of `C(1,1)` and the second element as the location for the center of `C(m,n)`, where `[m,n] = size(C)`. If `C` is a 3-D array, then `m` and `n` are the first two dimensions. Evenly distribute the centers of the remaining elements of `C` between those two points.

  The width of each pixel is determined by the expression:

```
(x(2)-x(1))/(size(C,2)-1)
```

If `x(1)` > `x(2)`, then the image is flipped left-right.

- Scalar — Center `C(1,1)` at this location and each following element one unit apart.

To use the low-level version of the `image` function instead, set the XData property as a name-value pair. For example, `image('XData',x,'YData',y,'CData',C)`.

You cannot interactively pan or zoom outside the x-axis limits or y-axis limits of an image, unless the limits are already set outside the bounds of the image. If the limits are already outside the bounds, there is no such restriction. If other objects (such as a line) occupy the axes and extend beyond the bounds of the image, you can pan or zoom to the bounds of the other objects, but no further.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

y — Placement along y-axis

`[1 size(C,1)]` (default) | two-element vector | scalar

Placement along *y*-axis, specified in one of these forms:

- Two-element vector — Use the first element as the location for the center of `C(1,1)` and the second element as the location for the center of `C(m,n)`, where `[m,n] = size(C)`. If `C` is a 3-D array, then `m` and `n` are the first two dimensions. Evenly distribute the centers of the remaining elements of `C` between those two points.

  The height of each pixel is determined by the expression:

  ```
  (y(2)-y(1))/(size(C,1)-1)
  ```

  If `y(1)` > `y(2)`, then the image is flipped up-down.
- Scalar — Center `C(1,1)` at this location and each following element one unit apart.

To use the low-level version of the `image` function instead, set the YData property as a name-value pair. For example, `image('XData',x,'YData',y,'CData',C)`.

You cannot interactively pan or zoom outside the x-axis limits or y-axis limits of an image, unless the limits are already set outside the bounds of the image. If the limits are already outside the bounds, there is no such restriction. If other objects (such as a line) occupy the axes and extend beyond the bounds of the image, you can pan or zoom to the bounds of the other objects, but no further.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`ax` — `Axes` object
`Axes` object

`Axes` object. If you do not specify an `Axes` object, then `image` uses the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `image([1 2 3],'AlphaData',0.5)` displays a semitransparent image.

The properties listed here are a subset of image properties. For a complete list, see Image Properties.

`'CDataMapping'` — Color data mapping method
`'direct'` (default) | `'scaled'`

Color data mapping method, specified as `'direct'` or `'scaled'`. Use this property to control the mapping of color data values in `CData` into the colormap. `CData` must be a vector or a matrix defining indexed colors. This property has no effect if `CData` is a 3-D array defining true colors.

The methods have these effects:

- `'direct'` — Interpret the values as indices into the current colormap. Values with a decimal portion are fixed to the nearest lower integer.
  - If the values are of type `double` or `single`, then values of `1` or less map to the first color in the colormap. Values equal to or greater than the length of the colormap map to the last color in the colormap.
  - If the values are of type `uint8`, `uint16`, `uint32`, `uint64` , `int8`, `int16`, `int32`, or `int64`, then values of `0` or less map to the first color in the colormap. Values equal to or greater than the length of the colormap map to the last color in the colormap (or up to the range limits of the type).
  - If the values are of type `logical`, then values of `0` map to the first color in the colormap and values of `1` map to the second color in the colormap.

- `'scaled'` — Scale the values to range between the minimum and maximum color limits. The CLim property of the axes contains the color limits.

`'AlphaData'` — Transparency data

1 (default) | scalar | array the same size as `CData`

Transparency data, specified in one of these forms:

- Scalar — Use a consistent transparency across the entire image.
- Array the same size as `CData` — Use a different transparency value for each image element.

The `AlphaDataMapping` property controls how MATLAB interprets the alpha data transparency values.

Example: `0.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`'AlphaDataMapping'` — Interpretation of `AlphaData` values

`'none'` (default) | `'scaled'` | `'direct'`

Interpretation of `AlphaData` values, specified as one of these values:

- `'none'` — Interpret the values as transparency values. A value of 1 or greater is completely opaque, a value of 0 or less is completely transparent, and a value between 0 and 1 is semitransparent.
- `'scaled'` — Map the values into the figure's alphamap. The minimum and maximum alpha limits of the axes determine the alpha data values that map to the first and last elements in the alphamap, respectively. For example, if the alpha limits are `[3 5]`, then alpha data values less than or equal to `3` map to the first element in the alphamap. Alpha data values greater than or equal to `5` map to the last element in the alphamap. The ALim property of the axes contains the alpha limits. The Alphamap property of the figure contains the alphamap.
- `'direct'` — Interpret the values as indices into the figure's alphamap. Values with a decimal portion are fixed to the nearest lower integer:
  - If the values are of type `double` or `single`, then values of 1 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap.

- If the values are of type integer, then values of 0 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap (or up to the range limits of the type). The integer types are `uint8`, `uint16`, `uint32`, `uint64` , `int8`, `int16`, `int32`, and `int64`.
- If the values are of type `logical`, then values of 0 map to the first element in the alphamap and values of 1 map to the second element in the alphamap.

Output Arguments

`im` — `Image` object
`Image` object

`Image` object, returned as a scalar. Use `im` to set properties of the image after it is created. For a list, see Image Properties.

Definitions

High-Level Versus Low-Level Version of Image

The `image` function has two versions, the high-level version and the low-level version. If you use `image` with `'CData'` as an input argument, then you are using the low-level version. Otherwise, you are using the high-level version.

The high-level version of `image` calls `newplot` before plotting and sets these axes properties:

- Layer to `'top'`. The image is shown in front of any tick marks or grid lines.
- YDir to `'reverse'`. Values along the *y*-axis increase from top to bottom. To decrease the values from top to bottom, set `YDir` to `'normal'`. This setting reverses both the *y*-axis and the image.
- View to `[0 90]`.

The low-level version of the `image` function does not call `newplot` and does not set these axes properties.

Tips

- To read image data into MATLAB from graphics files in various standard formats, such as TIFF, use `imread`. To write MATLAB image data to graphics files, use `imwrite`. The `imread` and `imwrite` functions support a variety of graphics file formats and compression schemes.

See Also

See Also

Functions

`colormap` | `imagesc` | `imfinfo` | `imread` | `imshow` | `imwrite`

Properties

Image Properties

Introduced before R2006a

Image Properties

Control image appearance and behavior

Description

`Image` properties control the appearance and behavior of `Image` objects. By changing property values, you can modify certain aspects of the image.

Starting in R2014b, you can use dot notation to query and set properties.

```
im = image(rand(20));
C = im.CData;
im.CDataMapping = 'scaled';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Image Data

`CData` — Image color data
64-by-64 array (default) | vector or matrix | 3-D array of RGB triplets

Image color data, specified in one of these forms:

- Vector or matrix — This format defines indexed image data. Each element defines a color for one pixel of the image. The elements map to colors in the colormap. The `CDataMapping` property controls the mapping method.
- 3-D array of RGB triplets — This format defines true color image data using RGB triplet values. Each RGB triplet defines a color for one pixel of the image. An RGB triplet is a three-element vector that specifies the intensities of the red, green, and blue components of the color. The first page of the 3-D array contains the red components, the second page contains the green components, and the third page contains the blue components. Since the image uses true colors instead of colormap colors, the `CDataMapping` property has no effect.
    - If `CData` is of type `double`, then an RGB triplet value of `[0 0 0]` corresponds to black and `[1 1 1]` corresponds to white.
    - If `CData` is an integer type, then the image uses the full range of data to determine the color. For example, if `CData` is of type `uint8`, then `[0 0 0]` corresponds to

black and `[255 255 255]` corresponds to white. If `CData` is of type `int8`, then `[-128 -128 -128]` corresponds to black and `[127 127 127]` corresponds to white.

- If `CData` is of type `logical`, then `[0 0 0]` corresponds to black and `[1 1 1]` corresponds to white.

This illustration shows the relative dimensions of `CData` for the two color models.

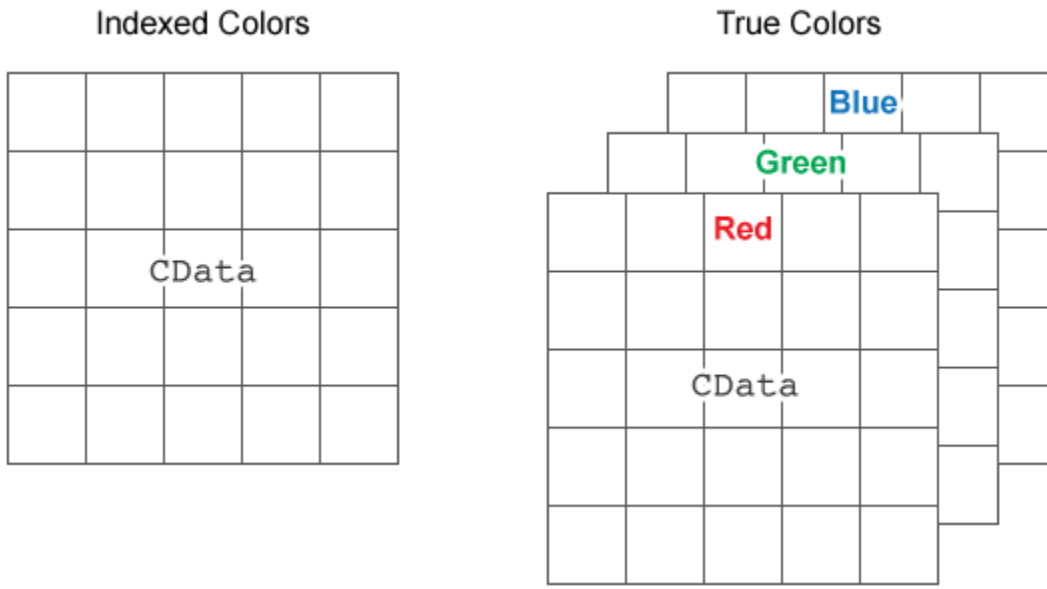

The behavior of `NaN` elements is not defined.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`CDataMapping` — Color data mapping method

`'direct'` (default) | `'scaled'`

Color data mapping method, specified as `'direct'` or `'scaled'`. Use this property to control the mapping of color data values in `CData` into the colormap. `CData` must be a vector or a matrix defining indexed colors. This property has no effect if `CData` is a 3-D array defining true colors.

The methods have these effects:

- `'direct'` — Interpret the values as indices into the current colormap. Values with a decimal portion are fixed to the nearest lower integer.
  - If the values are of type `double` or `single`, then values of `1` or less map to the first color in the colormap. Values equal to or greater than the length of the colormap map to the last color in the colormap.
  - If the values are of type `uint8`, `uint16`, `uint32`, `uint64` , `int8`, `int16`, `int32`, or `int64`, then values of `0` or less map to the first color in the colormap. Values equal to or greater than the length of the colormap map to the last color in the colormap (or up to the range limits of the type).
  - If the values are of type `logical`, then values of `0` map to the first color in the colormap and values of `1` map to the second color in the colormap.
- `'scaled'` — Scale the values to range between the minimum and maximum color limits. The CLim property of the axes contains the color limits.

Image Position

`XData` — Placement along x-axis

`[1 size(CData,2)]` (default) | two-element vector | scalar

Placement along the *x*-axis, specified in one of these forms:

- Two-element vector — Use the first element as the location for the center of `CData(1,1)` and the second element as the location for the center of `CData(m,n)`, where `[m,n] = size(CData)`. Evenly distribute the centers of the remaining `CData` elements between those two points.

  The width of each pixel is determined by the expression:

  ```
  (XData(2)-XData(1))/(size(CData,2)-1)
  ```

  If `XData(1)` > `XData(2)`, then the image is flipped left-right.
- Scalar — Center `CData(1,1)` at this location and each following element one unit apart.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`YData` — Placement along y-axis

`[1 size(CData,1)]` (default) | two-element vector | scalar

Placement along *y*-axis, specified in one of these forms:

- Two-element vector — Use the first element as the location for the center of `CData(1,1)` and the second element as the location for the center of `CData(m,n)`, where `[m,n] = size(CData)`. Evenly distribute the centers of the remaining `CData` elements between those two points.

  The height of each pixel is determined by the expression:

  ```
  (YData(2)-YData(1))/(size(CData,1)-1)
  ```

  If `YData(1)` > `YData(2)`, then the image is flipped up-down.
- Scalar — Center `CData(1,1)` at this location and each following element one unit apart.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Image Transparency

`AlphaData` — Transparency data

1 (default) | scalar | array the same size as `CData`

Transparency data, specified in one of these forms:

- Scalar — Use a consistent transparency across the entire image.
- Array the same size as `CData` — Use a different transparency value for each image element.

The `AlphaDataMapping` property controls how MATLAB interprets the alpha data transparency values.

Example: `0.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`AlphaDataMapping` — Interpretation of `AlphaData` values

`'none'` (default) | `'scaled'` | `'direct'`

Interpretation of `AlphaData` values, specified as one of these values:

- `'none'` — Interpret the values as transparency values. A value of 1 or greater is completely opaque, a value of 0 or less is completely transparent, and a value between 0 and 1 is semitransparent.
- `'scaled'` — Map the values into the figure's alphamap. The minimum and maximum alpha limits of the axes determine the alpha data values that map to the first and last elements in the alphamap, respectively. For example, if the alpha limits are `[3 5]`, then alpha data values less than or equal to `3` map to the first element in the alphamap. Alpha data values greater than or equal to `5` map to the last element in the alphamap. The ALim property of the axes contains the alpha limits. The Alphamap property of the figure contains the alphamap.
- `'direct'` — Interpret the values as indices into the figure's alphamap. Values with a decimal portion are fixed to the nearest lower integer:
  - If the values are of type `double` or `single`, then values of 1 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap.
  - If the values are of type integer, then values of 0 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap (or up to the range limits of the type). The integer types are `uint8`, `uint16`, `uint32`, `uint64` , `int8`, `int16`, `int32`, and `int64`.
  - If the values are of type `logical`, then values of 0 map to the first element in the alphamap and values of 1 map to the second element in the alphamap.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

Identifiers

`Type` — Type of graphics object

`'image'`

This property is read-only.

Type of graphics object, returned as `'image'`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the `Image` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Image` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Image` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Image` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Image` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Image` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Image` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Image` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`image` | `imagesc`

Topics
"Access Property Values"
"Graphics Object Properties"

imageDatastore

Create ImageDatastore object for collections of image data

Syntax

```
imds = imageDatastore(location)
imds = imageDatastore(location,Name,Value)
```

Description

`imds = imageDatastore(location)` creates a datastore from the collection of image data specified by `location`. A datastore is a repository for collections of data that are too large to fit in memory. After creating an `ImageDatastore` object, you can read and process the data in various ways. See ImageDatastore for more information.

`imds = imageDatastore(location,Name,Value)` specifies additional parameters for `imds` using one or more name-value pair arguments.

Examples

Create ImageDatastore Object

Create an `ImageDatastore` object associated with all `.tif` files in the MATLAB® path and its subfolders. Use the folder names as label names.

```
imds = imageDatastore(fullfile(matlabroot,'toolbox','matlab'),...
'IncludeSubfolders',true,'FileExtensions','.tif','LabelSource','foldernames')
```

```
imds =

  ImageDatastore with properties:

       Files: {
              ' ...\matlab\toolbox\matlab\demos\example.tif';
              ' ...\matlab\toolbox\matlab\imagesci\corn.tif'
              }
```

```
    Labels: [demos; imagesci]
  ReadSize: 1
   ReadFcn: @readDatastoreImage
```

Input Arguments

`location` — Files or folders to include in the datastore

character vector | cell array of character vectors

Files or folders to include in the datastore, specified as a character vector or cell array of character vectors. If the files are not in the current folder, then `location` must be full or relative paths. Files within subfolders of the specified folder are not automatically included in the datastore.

You can use the wildcard character (*) when specifying `location`. This character indicates that all matching files or all files in the matching folders are included in the datastore.

If the files are not available locally, then the full path of the files or folders must be an internationalized resource identifier (IRI), such as `hdfs://hostname:portnumber/path_to_file`.

For information on using `datastore` with Amazon S3 and HDFS, see "Read Remote Data".

Note: When reading from HDFS or when reading Sequence files locally, the `datastore` function calls the `javaaddpath` command. This command does the following:

- Clears the definitions of all Java classes defined by files on the dynamic class path
- Removes all global variables and variables from the base workspace
- Removes all compiled scripts, functions, and MEX-functions from memory

To prevent persistent variables, code files, or MEX-files from being cleared, use the `mlock` function.

When `location` represents a folder, the datastore includes only supported image file formats and ignores any other format. Supported files have an `imformats` format.

Example: `'file1.jpg'`

Example: `'../dir/data/file1.png'`

Example: `{'C:\dir\data\file1.tif','C:\dir\data\file2.tif'}`

Example: `'C:\dir\data\*.jpg'`

Data Types: `char` | `cell`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `imds = imageDatastore('C:\dir\imagedata','FileExtensions', {'.jpg','.tif'})`

`'IncludeSubfolders'` — Subfolder inclusion flag
`true` or `false` | 0 or 1

Subfolder inclusion flag, specified as the comma-separated pair consisting of `'IncludeSubfolders'` and `true`, `false`, 0, or 1. Specify `true` to include all files and subfolders within each folder or `false` to include only the files within each folder.

If you do not specify `'IncludeSubfolders'`, then the default value is `false`.

Example: `'IncludeSubfolders',true`

Data Types: `logical` | `double`

`'FileExtensions'` — Image file extensions
character vector | cell array of character vectors

Image file extensions, specified as the comma-separated pair consisting of `'FileExtensions'` and a character vector or cell array of character vectors. The specified extensions do not require an `imformats` format, and you can use the empty quotes `''` to represent files without extensions. If you do not specify `'FileExtensions'`, then `imageDatastore` automatically includes all images with `imformats` extensions in the specified path. If you want to include extensions that `imformats` does not recognize, then specify all extensions.

Example: `'FileExtensions','.jpg'`

Example: `'FileExtensions',{'.jpg','.png'}`

Data Types: `char` | `cell`

`'LabelSource'` — Source providing label data
`'none'` (default) | `'foldernames'`

Source providing label data, specified as the comma-separated pair consisting of `'LabelSource'` and `'none'` or `'foldernames'`. If `'none'` is specified, then the `Labels` property is empty. If `'foldernames'` is specified, then labels are assigned according to the folder names and stored in the `Labels` property. You can later modify the labels by accessing the `Labels` property directly.

Data Types: `char`

In addition to these name-value pairs, you also can specify any of the properties on the ImageDatastore page as name-value pairs, except for the `Files` property.

Output Arguments

`imds` — Image datastore
`ImageDatastore` object

Datastore for an image file collection, returned as an `ImageDatastore` object. The `Files` property is a cell array of character vectors, where each character vector is an absolute path to a file resolved from the `location` argument. See ImageDatastore for more information.

See Also

See Also
`datastore` | `imformats` | `mapreduce` | `tall`

Topics
"Getting Started with Datastore"
"Read Remote Data"

Introduced in R2016a

imagesc

Display image with scaled colors

Syntax

```
imagesc(C)
imagesc(x,y,C)
imagesc(___,clims)
imagesc('CData',C)
imagesc('XData',x,'YData',y,'CData',C)
```

```
imagesc(___,Name,Value)
imagesc(ax,___)
```

```
im = imagesc(___)
```

Description

`imagesc(C)` displays the data in array `C` as an image that uses the full range of colors in the colormap. Each element of `C` specifies the color for 1 pixel of the image. The resulting image is an `m`-by-`n` grid of pixels where `m` is the number of columns and `n` is the number of rows in `C`. The row and column indices of the elements determine the centers of the corresponding pixels.

`imagesc(x,y,C)` specifies the image location. Use `x` and `y` to specify the locations of the corners corresponding to `C(1,1)` and `C(m,n)`. To specify both corners, set `x` and `y` as two-element vectors. To specify the first corner and let `imagesc` determine the other, set `x` and `y` as scalar values. The image is stretched and oriented as applicable.

`imagesc(___,clims)` specifies the data values that map to the first and last elements of the colormap. Specify `clims` as a two-element vector of the form `[cmin cmax]`, where values less than or equal to `cmin` map to the first color in the colormap and values greater than or equal to `cmax` map to the last color in the colormap.

`imagesc('CData',C)` adds the image to the current axes without replacing existing plots. This syntax is the low-level version of `imagesc(C)`. For more information, see "High-Level Versus Low-Level Version" on page 1-5459.

`imagesc('XData',x,'YData',y,'CData',C)` specifies the image location. This syntax is the low-level version of `imagesc(x,y,C)`.

`imagesc( ___ ,Name,Value)` specifies image properties using one or more name-value pair arguments. You can specify image properties with any of the input argument combinations in the previous syntaxes. For a list of image properties and descriptions, see Image Properties.

`imagesc(ax, ___ )` creates the image in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`im = imagesc( ___ )` returns the `Image` object created. Use `im` to set properties of the image after it is created. You can specify this output with any of the input argument combinations in the previous syntaxes.

Examples

Display Image of Matrix Data

Create matrix C. Display an image of the data in C. Add a colorbar to the graph to show the current colormap. By default, `imagesc` scales the color limits so that image uses the full range of the colormap, where the smallest value in `C` maps to the first color in the colormap and the largest value maps to the last color.

```
C = [0 2 4 6; 8 10 12 14; 16 18 20 22];
imagesc(C)
colorbar
```

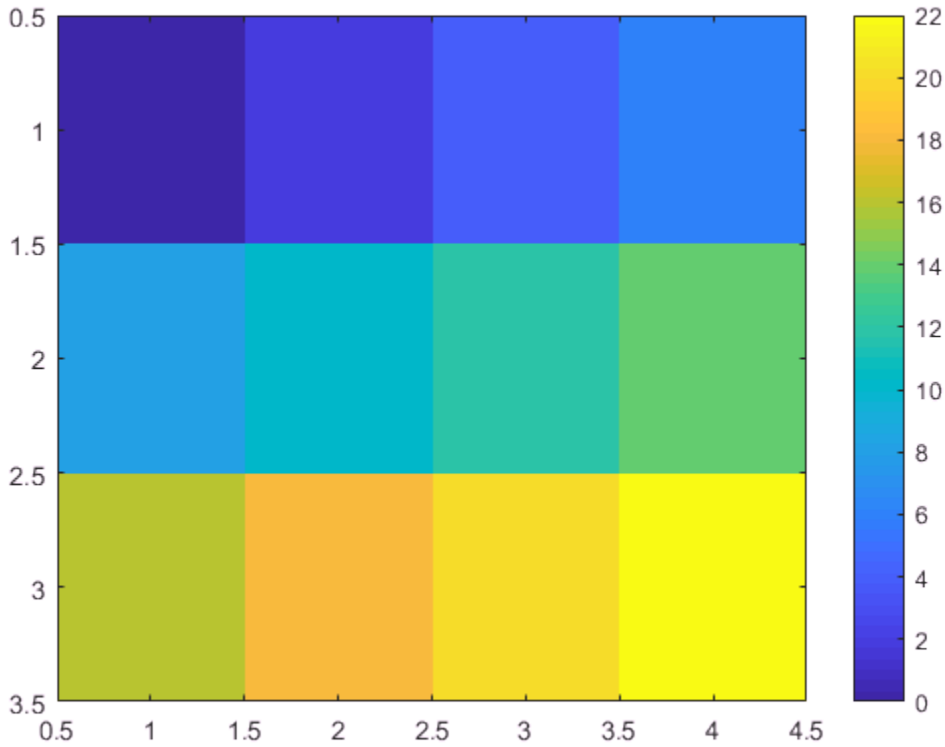

Control Image Placement

Place the image so that it lies between 5 and 8 on the x-axis and between 3 and 6 on the y-axis.

```
x = [5 8];
y = [3 6];
C = [0 2 4 6; 8 10 12 14; 16 18 20 22];
imagesc(x,y,C)
```

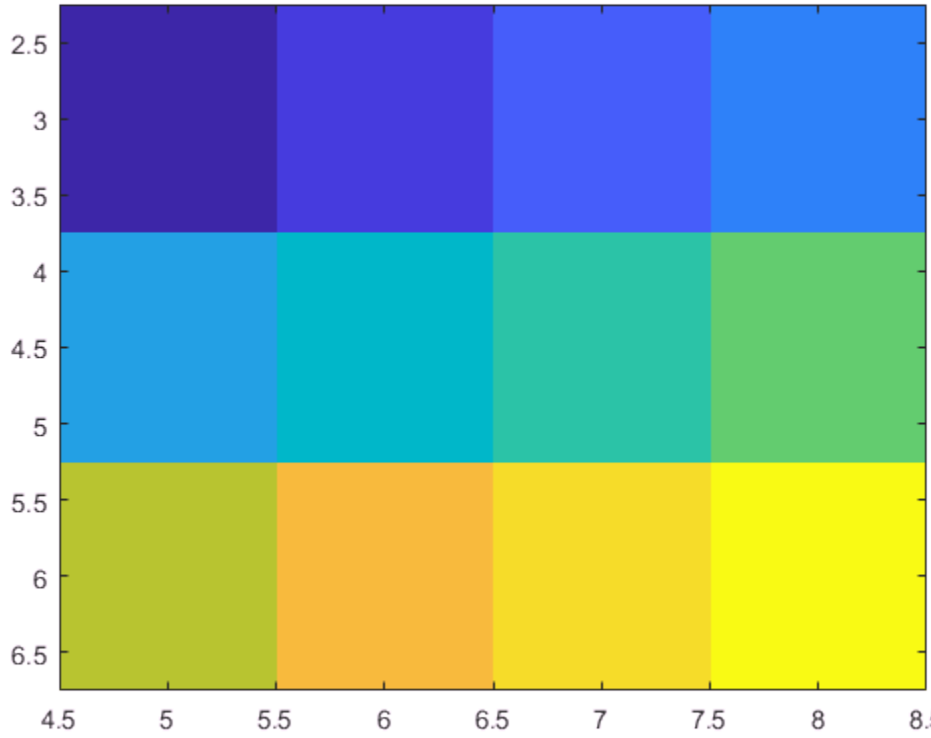

Notice that the pixel corresponding to `C(1,1)` is centered over the point (5,3). The pixel corresponding to `C(3,4)` is centered over the point (8,6). `imagesc` positions and orients the rest of the image between those two points.

Control Scaling of Data Values into Colormap

Create `C` as an array of data values. Create an image of `C` and set the color limits so that values of 4 or less map to the first color in the colormap and values of 18 or more map to the last color in the colormap. Display a colorbar to show how the data values map into the colormap.

```
C = [0 2 4 6; 8 10 12 14; 16 18 20 22];
```

```
clims = [4 18];
imagesc(C,clims)
colorbar
```

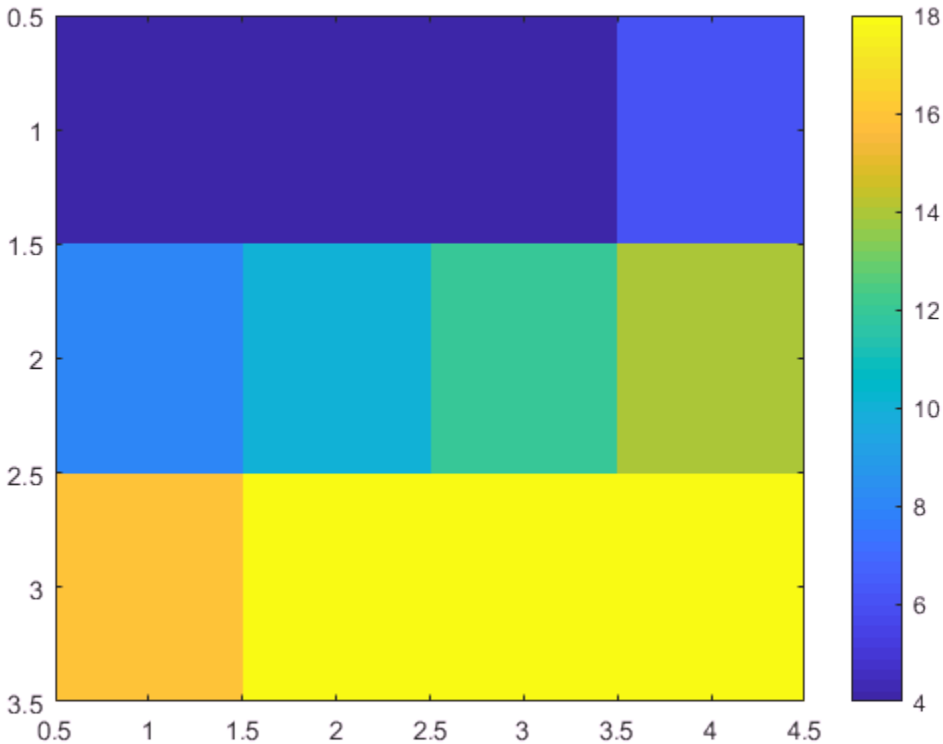

Modify Image After Creation

Create an image and return the image object, `im`. Then, make the image semitransparent by setting the `AlphaData` property of the image object.

```
C = [1 2 3; 4 5 6; 7 8 9];
im = imagesc(C);
```

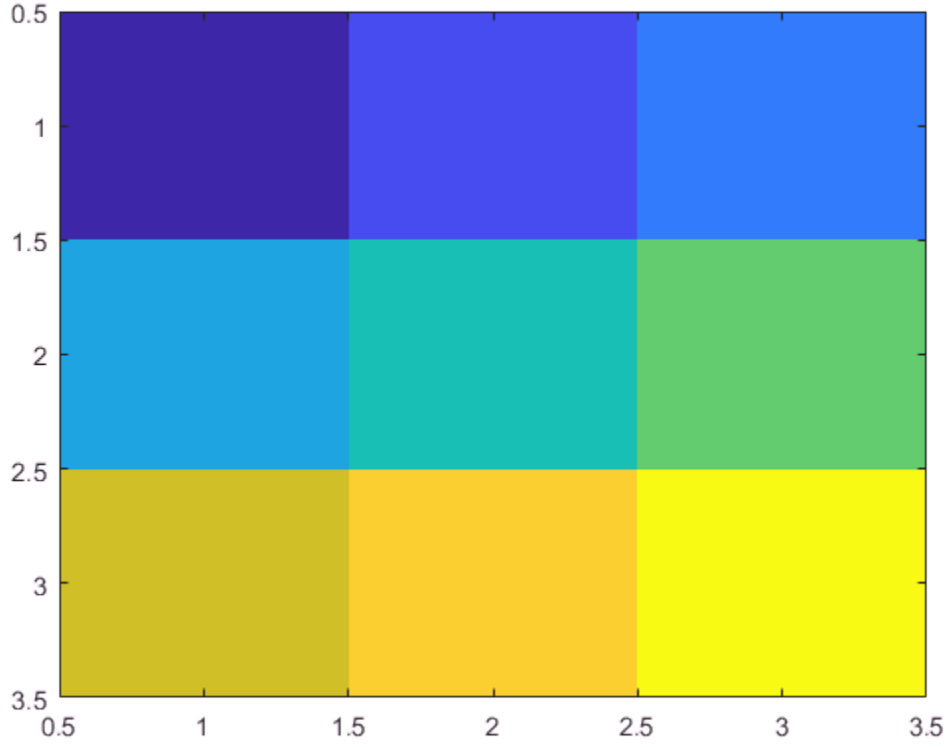


```
im.AlphaData = .5;
```

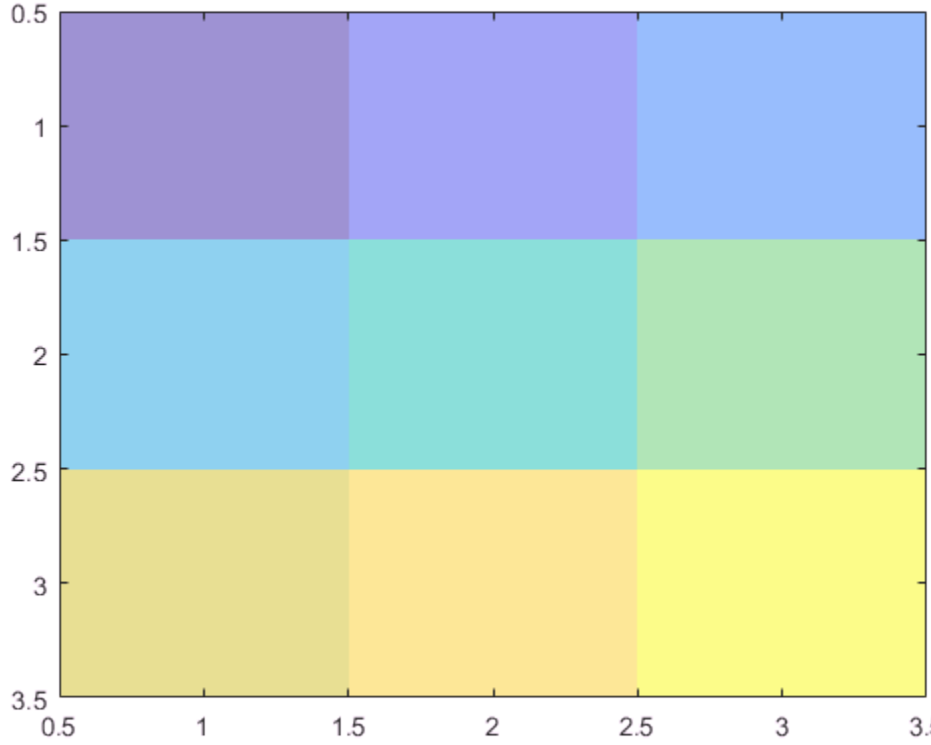

Add Image to Axes in 3-D View

Create a surface plot. Then, add an image under the surface. `imagesc` displays the image in the xy-plane.

```
Z = 10 + peaks;
surf(Z)
hold on
imagesc(Z)
```

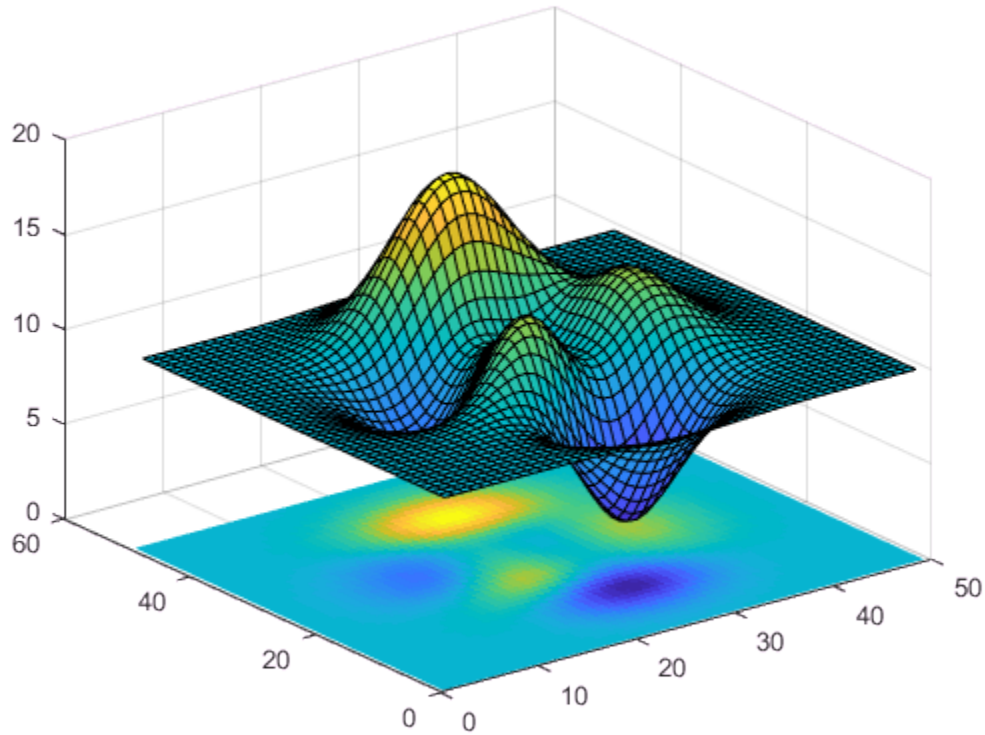

Input Arguments

C — Image color data

vector or matrix

Image color data, specified as a vector or a matrix. Each element of `C` defines a color for 1 pixel of the image. The elements of `C` map to colors in the colormap of the associated axes. The smallest value in `C` maps to the first color in the colormap and the largest value maps to the last color. The behavior of `NaN` elements is not defined.

To use the low-level version of the `imagesc` function instead, set the CData property as a name-value pair. For example, `imagesc('CData',C)`.

Converting Between Data Types

To convert the image data from an integer type to type `double`, add 1. For example, if `X8` is indexed image data of type `uint8`, convert it to type `double` using:

```
X64 = double(X8) + 1;
```

To convert the image data from type `double` to an integer type, subtract 1 and use `round` to ensure that all the values are integers. For example, if `X64` is indexed image data of type `double`, convert it to `uint8` using:

```
X8 = uint8(round(X64 - 1));
```

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

x — Placement along x-axis

`[1 size(C,2)]` (default) | two-element vector | scalar

Placement along the *x*-axis, specified in one of these forms:

- Two-element vector — Use the first element as the location for the center of `C(1,1)` and the second element as the location for the center of `C(m,n)`, where `[m,n] = size(C)`. If `C` is a 3-D array, then `m` and `n` are the first two dimensions. Evenly distribute the centers of the remaining elements of `C` between those two points.

  The width of each pixel is determined by the expression:

  ```
  (x(2)-x(1))/(size(C,2)-1)
  ```

  If `x(1)` > `x(2)`, then the image is flipped left-right.
- Scalar — Center `C(1,1)` at this location and each following element one unit apart.

To use the low-level version of the `imagesc` function instead, set the XData property as a name-value pair. For example, `imagesc('XData',x,'YData',y,'CData',C)`.

You cannot interactively pan or zoom outside the x-axis limits or y-axis limits of an image, unless the limits are already set outside the bounds of the image. If the limits are

already outside the bounds, there is no such restriction. If other objects (such as a line) occupy the axes and extend beyond the bounds of the image, you can pan or zoom to the bounds of the other objects, but no further.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

y — Placement along y-axis

`[1 size(C,1)]` (default) | two-element vector | scalar

Placement along *y*-axis, specified in one of these forms:

- Two-element vector — Use the first element as the location for the center of `C(1,1)` and the second element as the location for the center of `C(m,n)`, where `[m,n] = size(C)`. If `C` is a 3-D array, then `m` and `n` are the first two dimensions. Evenly distribute the centers of the remaining elements of `C` between those two points.

  The height of each pixel is determined by the expression:

  ```
  (y(2)-y(1))/(size(C,1)-1)
  ```

  If `y(1)` > `y(2)`, then the image is flipped up-down.
- Scalar — Center `C(1,1)` at this location and each following element one unit apart.

To use the low-level version of the `imagesc` function instead, set the YData property as a name-value pair. For example, `imagesc('XData',x,'YData',y,'CData',C)`.

You cannot interactively pan or zoom outside the x-axis limits or y-axis limits of an image, unless the limits are already set outside the bounds of the image. If the limits are already outside the bounds, there is no such restriction. If other objects (such as a line) occupy the axes and extend beyond the bounds of the image, you can pan or zoom to the bounds of the other objects, but no further.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

climes — Color limits

two-element vector of form `[cmin cmax]`

Color limits, specified as a two-element vector of the form `[cmin cmax]`, where `cmax` is greater than `cmin`. Values in `C` that are less than or equal to `cmin` map to the first color in the colormap. Values greater than or equal to `cmax` map to the last color in the colormap. Values between `cmin` and `cmax` linearly map to the colormap.

If you specify the color limits, then the `imagesc` function sets the CLim property of the axes to the values specified. If you do not specify the color limits, then `imagesc` sets the `CLim` property of the axes to the minimum and maximum values in `C`.

`ax` — `Axes` object
`Axes` object

`Axes` object. If you do not specify an `Axes` object, then `imagesc` uses the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `imagesc([1 2 3],'AlphaData',0.5)` displays a semitransparent image.

The properties listed here are a subset of image properties. For a complete list, see Image Properties.

`'AlphaData'` — Transparency data
`1` (default) | scalar | array the same size as `CData`

Transparency data, specified in one of these forms:

- Scalar — Use a consistent transparency across the entire image.
- Array the same size as `CData` — Use a different transparency value for each image element.

The `AlphaDataMapping` property controls how MATLAB interprets the alpha data transparency values.

Example: `0.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`'AlphaDataMapping'` — Interpretation of `AlphaData` values
`'none'` (default) | `'scaled'` | `'direct'`

Interpretation of `AlphaData` values, specified as one of these values:

- `'none'` — Interpret the values as transparency values. A value of 1 or greater is completely opaque, a value of 0 or less is completely transparent, and a value between 0 and 1 is semitransparent.
- `'scaled'` — Map the values into the figure's alphamap. The minimum and maximum alpha limits of the axes determine the alpha data values that map to the first and last elements in the alphamap, respectively. For example, if the alpha limits are `[3 5]`, then alpha data values less than or equal to `3` map to the first element in the alphamap. Alpha data values greater than or equal to `5` map to the last element in the alphamap. The ALim property of the axes contains the alpha limits. The Alphamap property of the figure contains the alphamap.
- `'direct'` — Interpret the values as indices into the figure's alphamap. Values with a decimal portion are fixed to the nearest lower integer:
  - If the values are of type `double` or `single`, then values of 1 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap.
  - If the values are of type integer, then values of 0 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap (or up to the range limits of the type). The integer types are `uint8`, `uint16`, `uint32`, `uint64` , `int8`, `int16`, `int32`, and `int64`.
  - If the values are of type `logical`, then values of 0 map to the first element in the alphamap and values of 1 map to the second element in the alphamap.

Output Arguments

`im` — `Image` object

`Image` object

`Image` object. Use `im` to set properties of the image after it is created. For a list, see Image Properties.

Definitions

High-Level Versus Low-Level Version

The `imagesc` function has two versions, the high-level version and the low-level version. If you use `imagesc` with `'CData'` as an input argument, then you are using the low-level version. Otherwise, you are using the high-level version.

The high-level version of `imagesc` calls `newplot` before plotting and sets these axes properties:

- Layer to `'top'`. The image is shown in front of any tick marks or grid lines.
- YDir to `'reverse'`. Values along the *y*-axis increase from top to bottom. To decrease the values from top to bottom, set `YDir` to `'normal'`. This setting reverses both the *y*-axis and the image.
- View to `[0 90]`.

The low-level version of the `imagesc` function does not call `newplot` and does not set these axes properties.

For both versions, the `imagesc` function sets:

- The CData property of the `Image` object to the values in `C`.
- The CDataMapping property of the `Image` object to `'scaled'`.
- The CLim property of the `Axes` object to the minimum and maximum values in `C`, unless you specify the `clims` input argument.

Tips

- To read image data into MATLAB from graphics files in various standard formats, such as TIFF, use `imread`. To write MATLAB image data to graphics files, use `imwrite`. The `imread` and `imwrite` functions support various graphics file formats and compression schemes.
- To view or set the color limits of the axes, you can use the `caxis` function.

See Also

See Also

Functions
`caxis` | `colorbar` | `colormap` | `image` | `imfinfo` | `imread` | `imshow` | `imwrite`

Properties
Image Properties

Introduced before R2006a

imapprox

Approximate indexed image by reducing number of colors

Syntax

```
[Y,newmap] = imapprox(X,map,n)
[Y,newmap] = imapprox(X,map,tol)
Y = imapprox(X,map,newmap)
Y = imapprox(...,dither_option)
```

Description

`[Y,newmap] = imapprox(X,map,n)` approximates the colors in the indexed image `X` and associated colormap `map` by using minimum variance quantization. `imapprox` returns the indexed image `Y` with colormap `newmap`, which has at most `n` colors.

`[Y,newmap] = imapprox(X,map,tol)` approximates the colors in `X` and `map` through uniform quantization. `newmap` contains at most `(floor(1/tol)+1)^3` colors. `tol` must be between 0 and 1.0.

`Y = imapprox(X,map,newmap)` approximates the colors in `map` by using colormap mapping to find the colors in `newmap` that best match the colors in `map`.

`Y = imapprox(...,dither_option)` enables or disables dithering. `dither_option` can have one of these values.

Value	Description
`{'dither'}`(default)	Dithers, if necessary, to achieve better color resolution at the expense of spatial resolution.
`'nodither'`	Maps each color in the original image to the closest color in the new map. No dithering is performed.

Class Support

The input image X can be of class uint8, uint16, or double. The output image Y is of class uint8 if the length of newmap is less than or equal to 256. If the length of newmap is greater than 256, Y is of class double.

Examples

Reduce Number of Colors in Indexed Image

Load an indexed image of a mandrill's face. Display image X using its associated colormap, map, which has 220 colors.

```
figure
load mandrill
image(X)
colormap(map)
axis off
axis image
```

Reduce the number of colors in the indexed image from 220 to only 16 colors by producing a new image, Y, and its associated colormap, newmap.

```
figure
[Y,newmap] = imapprox(X,map,16);
image(Y)
colormap(newmap)
axis off
axis image
```

Algorithms

`imapprox` uses `rgb2ind` to create a new colormap that uses fewer colors.

See Also

`cmunique` | `dither` | `rgb2ind`

imfinfo

Information about graphics file

Syntax

```
info = imfinfo(filename)
info = imfinfo(filename,fmt)
info = imfinfo(URL)
```

Description

`info = imfinfo(filename)` returns a structure whose fields contain information about an image in a graphics file, `filename`.

The format of the file is inferred from its contents.

- If `filename` is a TIFF, HDF, ICO, GIF, or CUR file containing more than one image, then `info` is a structure array with one element for each image in the file. For example, `info(3)` would contain information about the third image in the file.

`info = imfinfo(filename,fmt)` additionally looks for a file named `filename.fmt`, if MATLAB cannot find a file named `filename`.

`info = imfinfo(URL)` returns information about the image at the specified internet resource, `URL`.

Examples

Return Information About Graphics File

Find information about the example image, `ngc6543a.jpg`.

```
info = imfinfo('ngc6543a.jpg');
```

The `info` structure contains the following information fields: `Filename`, `FileModDate`, `FileSize`, `Format`, `FormatVersion`, `Width`, `Height`, `BitDepth`, `ColorType`,

`FormatSignature`, `NumberOfSamples`, `CodingMethod`, `CodingProcess`, and `Comment`.

To display information from the structure, for example `CodingMethod`, type `info.CodingMethod` in the command window.

```
info.CodingMethod
```

```
ans =
'Huffman'
```

To display all the properties in the structure, type `info` in the command window.

Input Arguments

`filename` — Name of graphics file

character vector

Name of graphics file, specified as a character vector.

Example: `'myImage.jpg'`

Example: `'C:\myFolder\myImage.jpg'`

Data Types: `char`

`fmt` — Image format

character vector

Image format, specified as a character vector. The possible values for `fmt` are contained in the MATLAB file format registry. To view of list of these formats, run the `imformats` command.

Example: `'gif'`

Data Types: `char`

`URL` — Image location

character vector

Image location, specified as a character vector. `URL` must include the protocol type (e.g., `http://`).

Data Types: `char`

Output Arguments

`info` — Information about graphics file

structure array

Information about the graphics file, returned as a structure array. The set of fields in `info` depends on the individual file and its format. This table lists the nine fields that always appear, and describes their values.

Field Name	Description	Value
`Filename`	Name of the file or the internet URL specified. If the file is not in the current folder, the character vector contains the full path name of the file.	character vector
`FileModDate`	Date when the file was last modified.	character vector
`FileSize`	Size of the file, in bytes.	integer
`Format`	File format, as specified by *`fmt`*. For formats with more than one possible extension (for example, JPEG and TIFF files), `imfinfo` returns the first variant in the file format registry.	character vector
`FormatVersion`	File format version.	character vector or number
`Width`	Image width, in pixels.	integer
`Height`	Image height, in pixels.	integer
`BitDepth`	Number of bits per pixel.	integer
`ColorType`	Image type. `ColorType` includes, but is not limited to, `'truecolor'` for a truecolor (RGB) image, `'grayscale'` for a grayscale intensity image, or `'indexed'` for an indexed image.	character vector

Additional fields returned by some file formats:

- **JPEG and TIFF only** — If `filename` contains Exchangeable Image File Format (EXIF) tags, then `info` might also contain `'DigitalCamera'` or `'GPSInfo'` (global positioning system information) fields.

- **GIF only** — `imfinfo` returns the value of the `'DelayTime'` field in hundredths of seconds.
- **JPEG2000 only** — The `info` structure contains an m-by-3 cell array, `'ChannelDefinition'`. The first column of `'ChannelDefinition'` reports a channel position as it exists in the file. The second column reports the type of channel, and the third column reports the channel mapping.

See Also

See Also

`imformats` | `imread` | `imwrite`

Introduced before R2006a

imformats

Manage image file format registry

Syntax

```
imformats
```

```
formatStruct = imformats(fmt)
```

```
registry = imformats
registry = imformats(formatStruct)
registry = imformats('add',formatStruct)
registry = imformats('remove',fmt)
registry = imformats('update',fmt,formatStruct)
registry = imformats('factory')
```

Description

`imformats` displays a table of information listing all the values in the MATLAB file format registry. This registry determines which file formats the `imfinfo`, `imread`, and `imwrite` functions support.

`formatStruct = imformats(fmt)` searches the known formats in the MATLAB file format registry for the format associated with the file name extension specified by `fmt`. If found, `formatStruct` is a structure containing the characteristics and function names associated with the format. Otherwise, `formatStruct` is an empty structure.

`registry = imformats` returns a structure array, `registry`, containing all the values in the MATLAB file format registry.

`registry = imformats(formatStruct)` sets the MATLAB file format registry for the current MATLAB session to the values in `formatStruct`. The output structure, `registry`, contains the new registry settings. Use this syntax to replace image file format support.

Incorrect use of `imformats` to specify values in the MATLAB file format registry can result in the inability to load any image files. To return the file format registry to a working state, use `imformats` with the `'factory'` input.

`registry = imformats('add',formatStruct)` adds the values in `formatStruct` to the file format registry. Use this syntax to add image file format support.

`registry = imformats('remove',fmt)` removes the format with the extension specified by `fmt` from the file format registry. Use this syntax to remove image file format support.

`registry = imformats('update',fmt,formatStruct)` changes the format registry values for the format with extension `fmt` to have the values specified by `formatStruct`.

`registry = imformats('factory')` resets the MATLAB file format registry to the default format registry values. This removes any user-specified settings.

Examples

Determine if File Format Exists in Registry

Determine if the file format associated with the `.bmp` file extension is in the image file format registry.

```
formatStruct = imformats('bmp')
```

```
formatStruct = struct with fields:
            ext: {'bmp'}
            isa: @isbmp
           info: @imbmpinfo
           read: @readbmp
          write: @writebmp
          alpha: 0
    description: 'Windows Bitmap'
```

`formatStruct` is a non-empty structure, so the BMP file format is in the registry.

Add, Update, or Remove File Format from Registry

Add a hypothetical file format, ABC, to the image file format registry. Update, and then remove the format.

Create a structure with seven fields, defining values for the new format.

```
formatStruct = struct('ext','abc','isa',@isabc,...
    'info',@abcinfo,'read',@readabc,'write','',...
```

```
    'alpha',0,'description','My ABC Format')
```

```
formatStruct = struct with fields:
            ext: 'abc'
            isa: @isabc
           info: @abcinfo
           read: @readabc
          write: ''
          alpha: 0
    description: 'My ABC Format'
```

`formatStruct` is a 1-by-1 structure with seven fields. In this example, the `write` field is empty.

Add the new format to the file format registry.

```
registry = imformats('add',formatStruct);
```

Redefine the format associated with the extension, `abc`, by adding a value for the `write` field. Then, update the registry value for the format.

```
formatStruct2 = struct('ext','abc','isa',@isabc,...
    'info',@abcinfo,'read',@readabc,'write',@writeabc,...
    'alpha',0,'description','My ABC Format');

registry = imformats('update','abc',formatStruct2);
```

Remove the format with the extension, `abc`, from the file format registry.

```
registry = imformats('remove','abc');
```

Input Arguments

`formatStruct` — File format registry values

structure array

File format registry values, specified as a structure array with the following 7 fields.

Field	Description	Value
`ext`	File name extensions that are valid for this format.	Cell array of character vectors

Field	Description	Value
`isa`	Name of the function that determines if a file is of a certain format.	Character vector or function handle
`info`	Name of the function that reads information about a file.	Character vector or function handle
`read`	Name of the function that reads image data in a file.	Character vector or function handle
`write`	Name of the function that writes MATLAB data to a file.	Character vector or function handle
`alpha`	Presence or absence of an alpha channel.	`1` if the format has an alpha channel; otherwise it is `0`.
`description`	Text description of the file format.	Character vector

The values for the `isa`, `info`, `read`, and `write` fields must be either functions on the MATLAB search path or function handles.

Data Types: `struct`

`fmt` — File format extension

character vector

File format extension, specified as a character vector.

Example: `'jpg'`

Data Types: `char`

Output Arguments

`registry` — File format registry

structure array

File format registry, returned as a structure array with the following fields.

Field	Description	Value
`ext`	File name extensions that are valid for this format.	Cell array of character vectors

Field	Description	Value
`isa`	Name of the function that determines if a file is of a certain format.	Character vector or function handle
`info`	Name of the function that reads information about a file.	Character vector or function handle
`read`	Name of the function that reads image data in a file.	Character vector or function handle
`write`	Name of the function that writes MATLAB data to a file.	Character vector or function handle
`alpha`	Presence or absence of an alpha channel.	`1` if the format has an alpha channel; otherwise it is `0`.
`description`	Text description of the file format.	Character vector

Note: Use the `imread`, `imwrite`, and `imfinfo` functions to read, write, or get information about an image file when the file format is in the format registry. Do not directly invoke the functions returned in the fields of the `registry` structure array.

Tips

- Changes to the format registry do not persist between MATLAB sessions. To have a format always available when you start MATLAB, add the appropriate `imformats` command to the MATLAB startup file, `startup.m`, located in `$MATLAB/toolbox/local` on UNIX systems, or `$MATLAB\toolbox\local` on Windows systems.

See Also

See Also

`imfinfo` | `imread` | `imwrite` | `path`

Topics

"What Is the MATLAB Search Path?"

Introduced before R2006a

ImplicitFunctionLine Properties

Control implicit line chart appearance and behavior

Description

`ImplicitFunctionLine` properties control the appearance and behavior of an `ImplicitFunctionLine` object. By changing property values, you can modify certain aspects of the line chart. You can use dot notation to refer to a particular object and property:

```
fp = fimplicit(@(x,y) x.^2 + y.^2 - 3)
lw = fp.LineWidth
fp.LineWidth = 2
```

Display

`Function` — Function to plot

function handle | anonymous function | symbolic expression | symbolic function

Function to plot, specified as a function handle, anonymous function, or a symbolic expression or function.

`XRange` — Plotting interval for *x* values

`[-5 5]` (default) | two-element vector of form `[xmin xmax]`

Plotting interval for *x* values, specified as a two-element vector of the form `[xmin xmax]`.

`XRangeMode` — Selection mode for `XRange`

`'auto'` (default) | `'manual'`

Selection mode for `XRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`. If axes limits are specified, follow the specified limits instead.
- `'manual'` — Use manually specified values. To specify the values, set the `XRange` property.

`YRange` — Plotting interval for *y* values

`[−5 5]` (default) | two-element vector of form `[ymin ymax]`

Plotting interval for *y* values, specified as a two-element vector of the form `[ymin ymax]`.

`YRangeMode` — Selection mode for `YRange`

`'auto'` (default) | `'manual'`

Selection mode for `YRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`. If the axes limits are specified, follow the specified limits instead.
- `'manual'` — Use manually specified values. To specify the values, set the `YRange` property.

`MeshDensity` — Number of evaluation points

151 (default) | scalar

Number of evaluation points, specified as a scalar.

Line

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`Color` — Line color

`[0 0 1]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'x'` | `...`

Marker symbol, specified as one of the markers listed in this table. By default, the line does not have markers. Specifying a marker symbol adds markers at selected points along the line.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'+'`

Example: `'diamond'`

`MarkerSize` — Marker size

`6` (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`MarkerFaceColor` — Marker fill color

`'none'` (default) | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which makes the interior invisible.
- `'auto'` — Use the same color specified in the `MarkerEdgeColor` property.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`

Long Name	Short Name	RGB Triplet
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Data

`XData` — *x* values

vector

This property is read-only.

x values, returned as a vector. `XData`, `YData`, and `ZData` have equal lengths.

`YData` — *y* values

vector

This property is read-only.

y values, returned as a vector. `XData`, `YData`, and `ZData` have equal lengths.

`ZData` — *z* values

vector of zeros

This property is read-only.

z values, returned as a vector of zeros. `XData`, `YData`, and `ZData` have equal lengths.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

Identifiers

`Type` — Type of graphics object

`'implicitfunctionline'`

This property is read-only.

Type of graphics object, returned as `'implicitfunctionline'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text for legend label

autogenerated label (default) | character vector

Text for legend label, specified as a custom character vector. The default label is autogenerated from the `Function` property and the `texlabel` function. The legend does not appear until you call the `legend` function.

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
```

```
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `ImplicitFunctionLine` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `ImplicitFunctionLine` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `ImplicitFunctionLine` object that has no color. The `HitTest` property determines if the `ImplicitFunctionLine` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `ImplicitFunctionLine` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `ImplicitFunctionLine` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `ImplicitFunctionLine` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `ImplicitFunctionLine` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `ImplicitFunctionLine` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `ImplicitFunctionLine` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`fimplicit`

Topics

"Access Property Values"
"Graphics Object Properties"

Introduced in R2016b

ImplicitFunctionSurface Properties

Control implicit surface chart appearance and behavior

Description

`ImplicitFunctionSurface` properties control the appearance and behavior of `ImplicitFunctionSurface` objects. By changing property values, you can modify certain aspects of the surface chart. You can use dot notation to refer to a particular object and property:

```
fs = fimplicit3(@(x,y,z) x.^2 + y.^2 - z.^2)
lw = fs.LineWidth
fs.LineWidth = 2
```

Display

`Function` — Function to plot

function handle | anonymous function | symbolic expression | symbolic function

Function to plot, specified as a function handle, anonymous function, or a symbolic expression or function.

`XRange` — Plotting interval for *x* values

`[-5 5]` (default) | two-element vector of form `[xmin xmax]`

Plotting interval for *x* values, specified as a two-element vector of the form `[xmin xmax]`.

`XRangeMode` — Selection mode for `XRange`

`'auto'` (default) | `'manual'`

Selection mode for `XRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`. If axes limits are specified, follow the specified limits instead.
- `'manual'` — Use manually specified values. To specify the values, set the `XRange` property.

`YRange` — Plotting interval for *y* values

`[-5 5]` (default) | two-element vector of form `[ymin ymax]`

Plotting interval for *y* values, specified as a two-element vector of the form `[ymin ymax]`.

`YRangeMode` — Selection mode for `YRange`

`'auto'` (default) | `'manual'`

Selection mode for `YRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`. If the axes limits are specified, follow the specified limits instead.
- `'manual'` — Use manually specified values. To specify the values, set the `YRange` property.

`ZRange` — Plotting interval for *z* values

`[−5 5]` (default) | two-element vector of form `[zmin zmax]`

Plotting interval for *z* values, specified as a two-element vector of the form `[zmin zmax]`.

`ZRangeMode` — Selection mode for `ZRange`

`'auto'` (default) | `'manual'`

Selection mode for `ZRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`. If the axes limits are specified, follow the specified limits instead.
- `'manual'` — Use manually specified values. To specify the values, set the `ZRange` property.

`MeshDensity` — Number of evaluation points per direction

35 (default) | scalar

Number of evaluation points per direction, specified as a scalar.

Faces

`FaceColor` — Face color

`'interp'` (default) | `'none'` | RGB triplet | character vector of color name

Face color, specified as one of these values:

- `'interp'` — Interpolate the face colors. Coloring is based on `ZData` values.

- `'none'` — Do not draw the faces.
- RGB triplet or character vector of a color name — Use the same color for all of the faces.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`FaceAlpha` — Face transparency

1 (default) | scalar in range `[0 1]`

Face transparency, specified as a scalar in the range `[0,1]`. Use uniform transparency across all of the faces. A value of `1` is fully opaque and `0` is completely transparent. Values between `0` and `1` are semitransparent.

Edges

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	

Line Style	Description	Resulting Line
`':'`	Dotted line	.....
`'-.'`	Dash-dotted line	_._._._.-
`'none'`	No line	No line

`LineWidth` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`EdgeColor` — Line color
`[0 0 0]` (default) | `'interp'` | `'none'` | RGB triplet or character vector

Line color, specified as one of these values:

- `'interp'` — Color the edges based on the `ZData` property values.
- `'none'` — Do not draw the edges.
- RGB triplet or a character vector of a color name — Use the same color for all the edges. The default RGB triplet value of `[0 0 0]` corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`

Long Name	Short Name	RGB Triplet
'black'	'k'	[0 0 0]

Markers

Marker — Marker symbol

'none' (default) | 'o' | '+' | '*' | '.' | 'x' | ...

Marker symbol, specified as one of the markers listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at the intersection points of mesh lines.

Value	Description
'o'	Circle
'+'	Plus sign
'*'	Asterisk
'.'	Point
'x'	Cross
'square' or 's'	Square
'diamond' or 'd'	Diamond
'^'	Upward-pointing triangle
'v'	Downward-pointing triangle
'>'	Right-pointing triangle
'<'	Left-pointing triangle
'pentagram' or 'p'	Five-pointed star (pentagram)
'hexagram' or 'h'	Six-pointed star (hexagram)
'none'	No markers

Example: '+'

Example: 'diamond'

MarkerSize — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color as specified in the `EdgeColor` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`MarkerFaceColor` — Marker fill color

`'none'` (default) | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which makes the interior invisible.
- `'auto'` — Use the same color specified in the `MarkerEdgeColor` property.

- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Ambient Lighting

`AmbientStrength` — Strength of ambient light

`0.3` (default) | scalar in range `[0,1]`

Strength of ambient light, specified as a scalar value in the range `[0,1]`. Ambient light is a nondirectional light that illuminates the entire scene. There must be at least one visible light object in the axes for the ambient light to be visible.

The AmbientLightColor property for the axes sets the color of the ambient light. The color is the same for all objects in the axes.

Example: `0.5`

Data Types: `double`

`DiffuseStrength` — Strength of diffuse light

`0.6` (default) | scalar in range `[0,1]`

Strength of diffuse light, specified as a scalar value in the range `[0,1]`. Diffuse light is the nonspecular reflectance from light objects in the axes.

Example: `0.3`

Data Types: `double`

`SpecularColorReflectance` — Color of specular reflections

1 (default) | scalar in range `[0,1]`

Color of specular reflections, specified as a scalar value in the range `[0,1]`. A value of `1` sets the color using only the color of the light source. A value of `0` sets the color using both the color of the object from which it reflects and the color of the light source. The Color property of the light contains the color of the light source. The proportions vary linearly for values in between.

Example: `0.5`

Data Types: `double`

`SpecularExponent` — Size of specular spot

10 (default) | scalar greater than or equal to 1

Size of specular spot, specified as a scalar value greater than or equal to 1. Most materials have exponents in the range `[5 20]`.

Example: `7`

Data Types: `double`

`SpecularStrength` — Strength of specular reflection

`0.9` (default) | scalar in range `[0,1]`

Strength of specular reflection, specified as a scalar value in the range `[0,1]`. Specular reflections are the bright spots on the surface from light objects in the axes.

Example: `0.3`

Data Types: `double`

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

Identifiers

`Type` — Type of graphics object

`'implicitfunctionsurface'`

This property is read-only.

Type of graphics object, returned as `'implicitfunctionsurface'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text for legend label

autogenerated label (default) | character vector

Text for legend label, specified as a custom character vector. The default label is autogenerated from the `Function` property and the `texlabel` function. The legend does not appear until you call the `legend` function.

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.

- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `ImplicitFunctionSurface` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `ImplicitFunctionSurface` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `ImplicitFunctionSurface` object that has no color. The `HitTest` property determines if the `ImplicitFunctionSurface` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `ImplicitFunctionSurface` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `ImplicitFunctionSurface` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `ImplicitFunctionSurface` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `ImplicitFunctionSurface` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback. Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `ImplicitFunctionSurface` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `ImplicitFunctionSurface` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`fimplicit3`

Topics

"Access Property Values"
"Graphics Object Properties"

import

Add package or class to current import list

Syntax

```
import PackageName.ClassName
import PackageName.FunctionName
import PackageName.*

import
L = import
```

Description

`import PackageName.ClassName` adds the class name to the current import list. Use the `import` function in your code to refer to a class without specifying the entire package name.

The import list scope is defined as follows:

- Script invoked from the MATLAB command prompt — Scope is the base MATLAB workspace.
- Function, including nested and local function — Scope is the function and the function does not share the import list of the parent function. If the import list is needed in a MATLAB function or script and in any local functions, you must call the `import` function for each function.

  The import list of a function is persistent across calls to that function and is cleared only when the function is cleared. For more information, see the `clear` function.

To clear the current import list, type `clear import` at the MATLAB command prompt. Do not call `clear import` within a function or a script.

`import PackageName.FunctionName` adds the specified package-based function. Use this syntax to shorten the name of a specific function in a package without importing every function in the package, which might cause unexpected name conflicts.

`import PackageName.*` adds the specified package name. `PackageName` must be followed by `.*`.

Avoid using this syntax, as importing packages brings an unspecified set of names into the local scope, which might conflict with names in the MATLAB workspace. One possible use for this syntax is to import a partial package name. Then when you call a function, you use a shorter package name which does not conflict with simple function names. For example, the `matlab.io.hdf4.sd` package has a `close` function, which can conflict with the MATLAB `close` function.

`import` displays the current import list in the scope.

`L = import` returns the current import list.

Examples

Shorten Calls to Java Class Methods

```
import java.util.Currency java.lang.String
```

Create a `java.lang.String` object. There is no need to type the package name, `java.lang`.

```
s = String('hello')
```

```
s =

hello
```

List the `Currency` class methods, without typing the package name.

```
methods Currency
```

```
Methods for class Currency:

equals                    getAvailableCurrencies    getClass                  getCurrer
```

Shorten HDF4 Scientific Data Set Package Name

Use partial package names on your import list to simplify calls to `matlab.io.hdf4.sd` package functions and avoid conflicts with the MATLAB `close` function.

```
import matlab.io.hdf4.*
```

Display the full path to the example file `sd.hdf` on your system using the shortened package name `sd`.

```
sdID = sd.start('sd.hdf');
filename = sd.getFilename(sdID)
```

```
filename =

C:\Program Files\MATLAB\R2015a\toolbox\matlab\imagesci\sd.hdf
```

Call the close function with the `sd` package name.

```
sd.close(sdID)
```

There is no name conflict with the MATLAB `close` function when you import the partial package name.

```
which close
```

```
C:\Program Files\MATLAB\R2015a\toolbox\matlab\graphics\close.p
```

If you use the `matlab.io.hdf4.sd.*` syntax to import the entire package name, when you call `close`, MATLAB always chooses the package function. You cannot use `close` to remove a figure.

Import Single Package Function

Import the `matlab.io.hdf4.sd` package function, `readChunk` in a function, `myfunc`. You can call the function using the simple `readChunk` name, but only within the scope of `myfunc`.

```
function data = myfunc(ID,n,m)
import matlab.io.hdf4.sd.readChunk
data = readChunk(ID,[n m]);
end
```

Import Package in Both Script and Function

Open the `sd.hdf` example file and access the `temperature` data set.

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
```

```
sdsID = sd.select(sdID,idx);
```

Call the `myfunc` function from the previous example to read the data. `myfunc` must have its own `import` statement in order to use a shorted package name.

```
dataChunk = myfunc(sdsID,0,1);
```

Close the file.

```
sd.endAccess(sdsID)
sd.close(sdID)
```

Display Current Import List for Your System

```
import
```

```
ans =

    'java.util.Currency'
    'java.lang.String'
    'matlab.io.hdf4.*'
    'matlab.io.hdf4.sd.readChunk'
```

- "Use import in MATLAB Functions"
- "Package Function and Class Method Name Conflict"

Input Arguments

`PackageName` — Name of package
character array

Name of the package, specified as a character array.

Example: `matlab.io.hdf4`

`ClassName` — Name of class
character array

Name of the class, specified as a character array.

Example: `Currency`

`FunctionName` — Name of package function
character array

Name of the package function, specified as a character array.

Example: `readChunk`

Output Arguments

L — Import list
cell array of character arrays

Import list returned as a cell array of character arrays.

Limitations

- `import` cannot load a Java JAR package created by the MATLAB Compiler SDK™ product.
- Do not use `import` in conditional statements inside a function. MATLAB preprocesses the `import` statement before evaluating the variables in the conditional statements.

See Also

See Also
`clear` | `importdata` | `load`

Topics
"Use import in MATLAB Functions"
"Package Function and Class Method Name Conflict"
"Import Classes"

Introduced before R2006a

importdata

Load data from file

Syntax

```
A = importdata(filename)
A = importdata('-pastespecial')
A = importdata(___,delimiterIn)
A = importdata(___,delimiterIn,headerlinesIn)
[A,delimiterOut,headerlinesOut] = importdata(___)
```

Description

`A = importdata(filename)` loads data into array `A`.

`A = importdata('-pastespecial')` loads data from the system clipboard rather than from a file.

`A = importdata(___,delimiterIn)` interprets `delimiterIn` as the column separator in ASCII file, `filename`, or the clipboard data. You can use `delimiterIn` with any of the input arguments in the above syntaxes.

`A = importdata(___,delimiterIn,headerlinesIn)` loads data from ASCII file, `filename`, or the clipboard, reading numeric data starting from line `headerlinesIn+1`.

`[A,delimiterOut,headerlinesOut] = importdata(___)` additionally returns the detected delimiter character for the input ASCII file in `delimiterOut` and the detected number of header lines in `headerlinesOut`, using any of the input arguments in the previous syntaxes.

Examples

Import and Display an Image

Import and display the sample image, `ngc6543a.jpg`.

```
A = importdata('ngc6543a.jpg');
```

```
image(A)
```

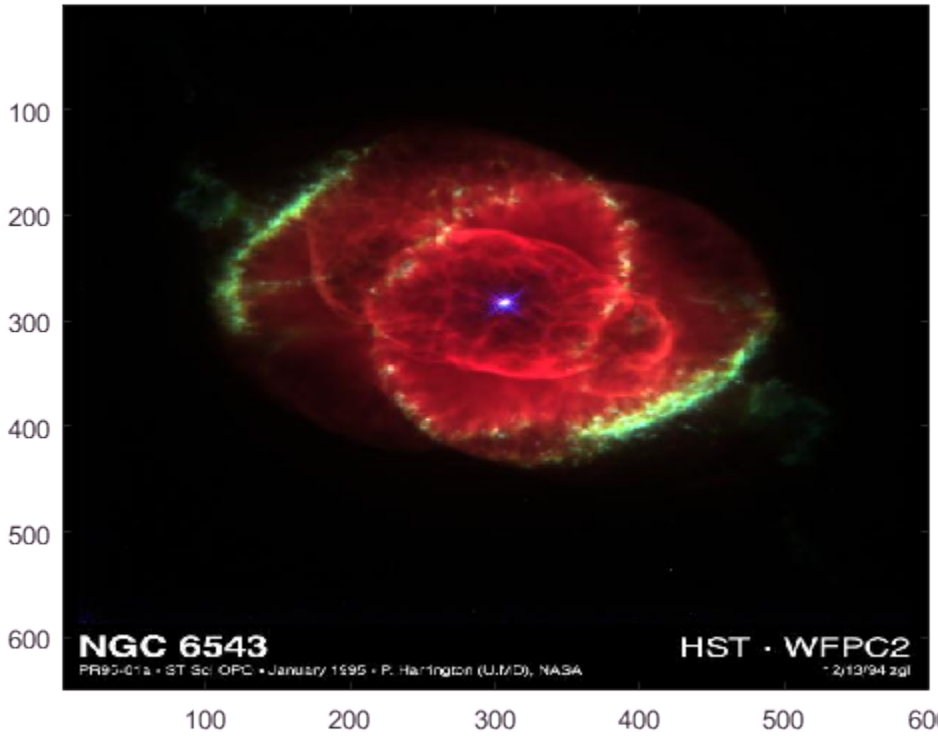

The output, `A`, is class `uint8` because the helper function, `imread`, returns empty results for `colormap` and `alpha`.

Import a Text File and Specify Delimiter and Column Header

Using a text editor, create a space-delimited ASCII file with column headers called `myfile01.txt`.

```
Day1  Day2  Day3  Day4  Day5  Day6  Day7
95.01 76.21 61.54 40.57  5.79 20.28  1.53
23.11 45.65 79.19 93.55 35.29 19.87 74.68
```

```
60.68  1.85 92.18 91.69 81.32 60.38 44.51
48.60 82.14 73.82 41.03  0.99 27.22 93.18
89.13 44.47 17.63 89.36 13.89 19.88 46.60
```

Import the file, specifying the space delimiter and the single column header.

```
filename = 'myfile01.txt';
delimiterIn = ' ';
headerlinesIn = 1;
A = importdata(filename,delimiterIn,headerlinesIn);
```

View columns 3 and 5.

```
for k = [3, 5]
   disp(A.colheaders{1, k})
   disp(A.data(:, k))
   disp(' ')
end
```

```
Day3
   61.5400
   79.1900
   92.1800
   73.8200
   17.6300


Day5
    5.7900
   35.2900
   81.3200
    0.9900
   13.8900
```

Import a Text File and Return Detected Delimiter

Using a text editor, create a comma-delimited ASCII file called `myfile02.txt`.

```
1,2,3
4,5,6
7,8,9
```

Import the file, and display the output data and detected delimiter character.

```
filename = 'myfile02.txt';
[A,delimiterOut]=importdata(filename)
```

```
A =

     1     2     3
     4     5     6
     7     8     9


delimiterOut =

,
```

Import Data from Clipboard

Copy the following lines to the clipboard. Select the text, right-click, and then select **Copy**.

```
1,2,3
4,5,6
7,8,9
```

Import the clipboard data into MATLAB by typing the following.

```
A = importdata('-pastespecial')
```

```
A =

     1     2     3
     4     5     6
     7     8     9
```

Input Arguments

`filename` — Name and extension of file to import

character vector | string

Name and extension of the file to import, specified as a character vector or a string. If `importdata` recognizes the file extension, it calls the MATLAB helper function designed to import the associated file format (such as `load` for MAT-files or `xlsread` for spreadsheets). Otherwise, `importdata` interprets the file as a delimited ASCII file.

For ASCII files and spreadsheets, `importdata` expects to find numeric data in a rectangular form (that is, like a matrix). Text headers can appear above or to the left of the numeric data, as follows:

- Column headers or file description text at the top of the file, above the numeric data.
- Row headers to the left of the numeric data.

Example: `'myFile.jpg'` or `"myFile.jpg"`

Data Types: `char` | `string`

`delimiterIn` — Column separator character

character vector | string

Column separator character, specified as a character vector or a string. The default character is interpreted from the file. Use `'\t'` for tab.

Example: `','` or `","`

Example: `'  '` or `"  "`

Data Types: `char` | `string`

`headerlinesIn` — Number of text header lines in ASCII file

nonnegative scalar integer

Number of text header lines in the ASCII file, specified as a nonnegative scalar integer. If you do not specify `headerlinesIn`, the `importdata` function detects this value in the file.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`A` — Data from the file

matrix | multidimensional array | scalar structure array

Data from the file, returned as a matrix, multidimensional array, or scalar structure array, depending on the characteristics of the file. Based on the file format of the input file, `importdata` calls a helper function to read the data. When the helper function returns more than one nonempty output, `importdata` combines the outputs into a `struct` array.

This table lists the file formats associated with helper functions that can return more than one output, and the possible fields in the structure array, `A`.

File Format	Possible Fields	Class
MAT-files	One field for each variable	Associated with each variable.

ASCII files and Spreadsheets	`data`
	`textdata`
	`colheaders`
	`rowheaders`
		For ASCII files, `data` contains a `double` array. Other fields contain `cell` arrays of character vectors. `textdata` includes row and column headers.
		For spreadsheets, each field contains a `struct`, with one field for each worksheet.

Images	`cdata`
	`colormap`
	`alpha`
		See `imread`.

Audio files	`data` `fs`	See `audioread`.

The MATLAB helper functions for most other supported file formats return one output. For more information about the class of each output, see the functions listed in "Supported File Formats for Import and Export".

If the ASCII file or spreadsheet contains either column or row headers, but not both, `importdata` returns a `colheaders` or `rowheaders` field in the output structure, where:

- `colheaders` contains only the last line of column header text. `importdata` stores all text in the `textdata` field.
- `rowheaders` is created only when the file or worksheet contains a single column of row headers.

`delimiterOut` — Detected column separator in the input ASCII file
character vector

Detected column separator in the input ASCII file, returned as a character vector.

`headerlinesOut` — Detected number of text header lines in the input ASCII file
integer

Detected number of text header lines in the input ASCII file, returned as an integer.

Tips

- To import ASCII files with nonnumeric characters outside of column or row headers, including columns of character data or formatted dates or times, use `textscan` instead of `importdata`.

See Also

See Also

`imread` | `load` | `readtable` | `save` | `textscan` | `uiimport` | `xlsread`

Topics

"Supported File Formats for Import and Export"
"Ways to Import Text Files"
"Ways to Import Spreadsheets"
"Import or Export a Sequence of Files"

Introduced before R2006a

DelimitedTextImportOptions

Import options object for delimited text

Description

A `DelimitedTextImportOptions` object enables you to specify how MATLAB imports tabular data from text files. The object contains properties that control the data import process, including the handling of errors and missing data. Use a `DelimitedTextImportOptions` object to query the current (detected) values of import properties or to assign new values based on your import needs.

Create Object

Create a `DelimitedTextImportOptions` object using the `detectImportOptions` function.

Properties

Variable Properties

`VariableNames` — Variable names
cell array of character vectors

Variable names, specified as a cell array of character vectors. The `VariableNames` property contains the names to use when importing variables.

If the data contains `N` variables, but no variable names are detected, then the `VariableNames` property contains `{'Var1','Var2',...,'VarN'}`.

Example: `opts.VariableNames` returns the current (detected) variable names.

Example: `opts.VariableNames(3) = {'Height'}` changes the name of the third variable to `Height`.

Data Types: `char | cell`

`VariableTypes` — Variable data types
cell array of character vectors

Variable data types, specified as a cell array of character vectors. The `VariableTypes` property designates the data types to use when importing variables. When assigning new values, specify `VariableTypes` as a cell array of valid data type names.

To update the `VariableTypes` property, use the `setvartype` function.

Example: `opts.VariableTypes` returns the current (detected) variable data types.

Example: `opts = setvartype(opts,'Height',{'double'})` changes the data type of the variable `Height` to `double`.

Data Types: `cell` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `categorical` | `datetime`

`SelectedVariableNames` — Subset of variables to import
character vector | cell array of character vectors | array of numeric indices

Subset of variables to import, specified as a character vector, a cell array of character vectors, or an array of numeric indices.

`SelectedVariableNames` must be a subset of names contained in the `VariableNames` property. By default, `SelectedVariableNames` contains all the variable names from the `VariableNames` property, which means that all variables are imported.

Use the `SelectedVariableNames` property to import only the variables of interest. Specify a subset of variables using the `SelectedVariableNames` property and use `readtable` to import only that subset.

Example: `opts.SelectedVariableNames = {'Height','LastName'}` selects only two variables, `Height` and `LastName`, for the import operation.

Example: `opts.SelectedVariableNames = [1 5]` selects only two variables, the first variable and the fifth variable, for the import operation.

Example: `T = readtable(filename,opts)` returns a table containing only the variables specified in the `SelectedVariableNames` property of the `opts` object.

Data Types: `uint16` | `uint32` | `uint64` | `logical` | `char` | `cell`

`VariableOptions` — Type specific variable import options
array of variable import options objects

Type specific variable import options, returned as an array of variable import options objects. The array contains an object corresponding to each variable specified in the

`VariableNames` property. Each object in the array contains properties that support the importing of data with a specific data type.

Variable options support these data types: numeric, text, `logical`, `datetime`, or `categorical`.

To query the current (or detected) options for a variable, use the `getvaropts` function.

To set and customize options for a variable, use the `setvaropts` function.

Example: `opts.VariableOptions` returns a collection of `VariableImportOptions` objects, one corresponding to each variable in the data.

Example: `getvaropts(opts,'Height')` returns the `VariableImportOptions` object for the `Height` variable.

Example: `opts = setvaropts(opts,'Height','FillValue',0)` sets the `FillValue` property for the variable `Height` to `0`.

Location Properties

`DataLine` — Data start location

positive scalar integer

Data start location, specified as a positive scalar integer. The `DataLine` property specifies the line number where data begins in the text file.

The value for the `DataLine` property must be greater than `0`.

Example: `opts.DataLine = 5;`

Data Types: `single` | `double` | `uint8` | `uint16` | `uint32` | `uint64`

`RowNamesColumn` — Row names location

`0` (default) | positive scalar integer

Row names location, specified as a positive scalar integer. The `RowNamesColumn` property specifies the location of the column containing the row names.

If `RowNamesColumn` is specified as 0, then do not import the row names. Otherwise, import the row names from the specified column.

Example: `opts.RowNamesColumn = 2;`

Data Types: `single` | `double` | `uint8` | `uint16` | `uint32` | `uint64`

`VariableNamesLine` — Variable names location
`0` (default) | positive scalar integer

Variable names location, specified as a positive scalar integer. The `VariableNamesLine` property specifies the line number where variable names are located.

If `VariableNamesLine` is specified as 0, then do not import the variable names. Otherwise, import the variable names from the specified line.

Example: `opts.VariableNamesLine = 6;`

Data Types: `single` | `double` | `uint8` | `uint16` | `uint32` | `uint64`

`VariableDescriptionsLine` — Variable description location
`0` (default) | positive scalar integer

Variable description location, specified as a positive scalar integer. The `VariableDescriptionsLine` property specifies the line number where variable descriptions are located.

If `VariableDescriptionsLine` is specified as 0, then do not import the variable descriptions. Otherwise, import the variable descriptions from the specified line.

Example: `opts.VariableDescriptionsLine = 7;`

Data Types: `single` | `double` | `uint8` | `uint16` | `uint32` | `uint64`

`VariableUnitsLine` — Variable units location
`0` (default) | positive scalar integer

Variable units location, specified as a positive scalar integer. The `VariableUnitsLine` property specifies the line number where variable units are located.

If `VariableUnitsLine` is specified as 0, then do not import the variable units. Otherwise, import the variable units from the specified line.

Example: `opts.VariableUnitsLine = 8;`

Data Types: `single` | `double` | `uint8` | `uint16` | `uint32` | `uint64`

Delimited Text Properties

`Delimiter` — Field delimiter characters
character vector | cell array of character vectors

Field delimiter characters, specified as a character vector or a cell array of character vectors.

Example: `'|'`

Example: `{';','*'}`

Data Types: `char` | `cell`

`Whitespace` — Characters to treat as white space

character vector

Characters to treat as white space, specified as a character vector of one or more characters.

Example: `' _'`

Example: `'?!.,'`

`LineEnding` — End-of-line characters

`{'\n','\r','\r\n'}` (default) | character vector | cell array of character vectors

End-of-line characters, specified as a character vector of one or more characters or a cell array of character vectors.

Example: `'\n'`

Example: `'\r\n'`

Example: `{'\b',':'}`

Data Types: `char` | `cell`

`CommentStyle` — Style of comments

character vector | cell array of character vectors

Style of comments, specified as a character vector or cell array of character vectors.

For example, specify `CommentStyle` as `'%'` to ignore the text following a percent sign on the same line.

Example: `{'/*'}`

Data Types: `char` | `cell`

`ConsecutiveDelimitersRule` — Procedure to handle consecutive delimiters

`'split'` | `'join'` | `'error'`

Procedure to handle consecutive delimiters, specified as one of the values in this table.

Consecutive Delimiters Rule	Behavior
`'split'`	Split the consecutive delimiters into multiple fields.
`'join'`	Join the delimiters into one delimiter.
`'error'`	Error and abort the import operation.

Example: `'join'`

`LeadingDelimitersRule` — Procedure to manage leading delimiters
`'keep'` | `'ignore'` | `'error'`

Procedure to manage leading delimiters, specified as one of the values in this table.

Leading Delimiters Rule	Behavior
`'keep'`	Keep the delimiter.
`'ignore'`	Ignore the delimiter.
`'error'`	Error and abort the import operation.

Example: `'ignore'`

`Encoding` — Character encoding scheme
`'UTF-8'` | `'ISO-8859-1'` | `'windows-1251'` | `'windows-1252'` | ...

Character encoding scheme associated with the file, specified as the comma-separated pair consisting of `'Encoding'` and `'system'` or a standard character encoding scheme name like one of the values in this table.

`'Big5'`	`'ISO-8859-1'`	`'windows-847'`
`'Big5-HKSCS'`	`'ISO-8859-2'`	`'windows-949'`
`'CP949'`	`'ISO-8859-3'`	`'windows-1250'`
`'EUC-KR'`	`'ISO-8859-4'`	`'windows-1251'`
`'EUC-JP'`	`'ISO-8859-5'`	`'windows-1252'`
`'EUC-TW'`	`'ISO-8859-6'`	`'windows-1253'`

'GB18030'	'ISO-8859-7'	'windows-1254'
'GB2312'	'ISO-8859-8'	'windows-1255'
'GBK'	'ISO-8859-9'	'windows-1256'
'IBM866'	'ISO-8859-11'	'windows-1257'
'KOI8-R'	'ISO-8859-13'	'windows-1258'
'KOI8-U'	'ISO-8859-15'	'US-ASCII'
	'Macintosh'	'UTF-8'
	'Shift_JIS'	

Example: `'system'` uses the system default encoding.

Replacement Rules

`MissingRule` — Procedure to manage missing data

`'fill'` | `'error'` | `'omitrow'` | `'omitvar'`

Procedure to manage missing data, specified as one of the values in this table.

Missing Rule	Behavior
`'fill'`	Replace missing data with the contents of the `FillValue` property. The `FillValue` property is specified in the `VariableImportOptions` object of the variable being imported. For more information on accessing the `FillValue` property, see `getvaropts`.
`'error'`	Stop importing and display an error message showing the missing record and field.
`'omitrow'`	Omit rows that contain missing data.
`'omitvar'`	Omit variables that contain missing data.

Example: `opts.MissingRule = 'omitrow';`

`EmptyLineRule` — Procedure to handle empty lines

`'skip'` | `'read'` | `'error'`

Procedure to handle empty lines in the data, specified as `'skip'`, `'read'`, or `'error'`. The importing function interprets white space as empty.

Empty Line Rule	Behavior
`'skip'`	Skip the empty lines.
`'read'`	Import the empty lines. The importing function parses the empty line using the values specified in `VariableWidths`, `VariableOptions`, `MissingRule`, and other relevant properties, such as `Whitespace`.
`'error'`	Display an error message and abort the import operation.

Example: `opts.EmptyLineRule = 'skip';`

`ImportErrorRule` — Procedure to handle import errors
`'fill'` | `'error'` | `'omitrow'` | `'omitvar'`

Procedure to handle import errors, specified as one of the values in this table.

Import Error Rule	Behavior
`'fill'`	Replace the data where the error occurred with the contents of the `FillValue` property. The `FillValue` property is specified in the `VariableImportOptions` object of the variable being imported. For more information on accessing the `FillValue` property, see `getvaropts`.
`'error'`	Stop importing and display an error message showing the error-causing record and field.
`'omitrow'`	Omit rows where errors occur.
`'omitvar'`	Omit variables where errors occur.

Example: `opts.ImportErrorRule = 'omitvar';`

`ExtraColumnsRule` — Procedure to handle extra columns
`'addvars'` | `'ignore'` | `'wrap'` | `'error'`

Procedure to handle extra columns in the data, specified as one of the values in this table.

Extra Columns Rule	Behavior
`'addvars'`	To import extra columns, create new variables. If there are N extra columns, then import new variables as `'ExtraVar1', 'ExtraVar2',..., 'ExtraVarN'`. NOTE: The extra columns are imported as text with data type`char`.
`'ignore'`	Ignore the extra columns of data.
`'wrap'`	Wrap the extra columns of data to new records. This action does not change the number of variables.
`'error'`	Display an error message and abort the import operation.

Example:

Object Functions

getvaropts	Get variable import options
setvaropts	Set variable import options
setvartype	Set variable data types

Examples

Create and Use Import Options for Text Files

Create import options, tailor the data types for multiple variables, and then read the data.

Create an import options object from a text file.

```
opts = detectImportOptions('airlinesmall.csv')
```

```
opts 
  DelimitedTextImportOptions with properties:

   Format Properties:
                    Delimiter: {','}
                   Whitespace: '\b\t '
                   LineEnding: {'\n'  '\r'  '\r\n'}
                CommentStyle: {}
```

```
    ConsecutiveDelimitersRule: 'split'
        LeadingDelimitersRule: 'keep'
                EmptyLineRule: 'skip'
                     Encoding: 'windows-1252'

   Replacement Properties:
                  MissingRule: 'fill'
              ImportErrorRule: 'fill'
             ExtraColumnsRule: 'addvars'

   Variable Import Properties:  Set types by name using setvartype
                VariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
                VariableTypes: {'double', 'double', 'double' ... and 26 more}
        SelectedVariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
              VariableOptions: Show all 29 VariableOptions
 Access VariableOptions sub-properties using setvaropts/getvaropts

   Location Properties:
                     DataLine: 2
            VariableNamesLine: 1
               RowNamesColumn: 0
            VariableUnitsLine: 0
     VariableDescriptionsLine: 0
```

Examine the `Type` property of variables `TaxiIn` and `TaxiOut`.

```
getvaropts(opts,{'TaxiIn','TaxiOut'})
```

```
ans =
  1×2 TextVariableImportOptions array with properties:

    WhitespaceRule
    Type
    FillValue
    Name
    QuoteRule
    TreatAsMissing
```

Change the type of the variables `TaxiIn` and `TaxiOut` to `double`.

```
 opts = setvartype(opts,{'TaxiIn','TaxiOut'},'double');
```

Specify the subset of variables to import and examine.

```
opts.SelectedVariableNames = {'TaxiIn','TaxiOut'};
```

Use the `readtable` function along with the options object to import the selected variables. Display a summary of the table.

```
T = readtable('airlinesmall.csv',opts);
summary(T)
```

```
Variables:

    TaxiIn: 123523×1 double

        Values:

            Min             0
            Median          5
            Max             1451
            NumMissing      37383

    TaxiOut: 123523×1 double

        Values:

            Min             0
            Median          13
            Max             755
            NumMissing      37364
```

See Also

See Also

`detectImportOptions` | `readtable`

Introduced in R2016b

FixedWidthImportOptions

Import options object for fixed-width text files

Description

A `FixedWidthImportOptions` object enables you to specify how MATLAB imports fixed-width tabular data from text files. The object contains properties that control the data import process, including the handling of errors and missing data. Use a `FixedWidthImportOptions` object to query the current (detected) values of import properties or to assign new values based on your import needs.

Create Object

To create a `FixedWidthImportOptions` object for a clean fixed-width text file, use the `detectImportOptions` function:

```
opts = detectImportOptions('MyFixedWidthFile.txt')
```

Alternatively, for a messy fixed-width text file that is not automatically detected by the `detectImportOptions` function, create a custom `FixedWidthImportOptions` object:

```
opts = matlab.io.text.FixedWidthImportOptions
```

To import data using this custom `FixedWidthImportOptions` object, you must first set up these properties: `VariableNames`, `VariableWidths`, `VariableTypes`, and `DataLine`.

Properties

Variable Properties

`VariableNames` — Variable names

cell array of character vectors

Variable names, specified as a cell array of character vectors. The `VariableNames` property contains the names to use when importing variables.

If the data contains `N` variables, but no variable names are detected, then the `VariableNames` property contains `{'Var1','Var2',...,'VarN'}`.

Example: `opts.VariableNames` returns the current (detected) variable names.

Example: `opts.VariableNames(3) = {'Height'}` changes the name of the third variable to `Height`.

Data Types: `char` | `cell`

`VariableWidths` — Field widths of variables

vector of positive integer values

Field widths of variables, specified as a vector of positive integer values. Each positive integer in the vector corresponds to the number of characters in a field that makes up the variable. The `VariableWidths` property contains an entry corresponding to each variable specified in the `VariableNames` property.

Example: `opts.VariableWidths` returns a vector of variable widths where each element corresponds to the width of a variable in the data.

`VariableTypes` — Variable data types

cell array of character vectors

Variable data types, specified as a cell array of character vectors. The `VariableTypes` property designates the data types to use when importing variables. When assigning new values, specify `VariableTypes` as a cell array of valid data type names.

To update the `VariableTypes` property, use the `setvartype` function.

Example: `opts.VariableTypes` returns the current (detected) variable data types.

Example: `opts = setvartype(opts,'Height',{'double'})` changes the data type of the variable `Height` to `double`.

Data Types: `cell` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `categorical` | `datetime`

`SelectedVariableNames` — Subset of variables to import

character vector | cell array of character vectors | array of numeric indices

Subset of variables to import, specified as a character vector, a cell array of character vectors, or an array of numeric indices.

`SelectedVariableNames` must be a subset of names contained in the `VariableNames` property. By default, `SelectedVariableNames` contains all the variable names from the `VariableNames` property, which means that all variables are imported.

Use the `SelectedVariableNames` property to import only the variables of interest. Specify a subset of variables using the `SelectedVariableNames` property and use `readtable` to import only that subset.

Example: `opts.SelectedVariableNames = {'Height','LastName'}` selects only two variables, `Height` and `LastName`, for the import operation.

Example: `opts.SelectedVariableNames = [1 5]` selects only two variables, the first variable and the fifth variable, for the import operation.

Example: `T = readtable(filename,opts)` returns a table containing only the variables specified in the `SelectedVariableNames` property of the `opts` object.

Data Types: `uint16` | `uint32` | `uint64` | `logical` | `char` | `cell`

`VariableOptions` — Type specific variable import options
array of variable import options objects

Type specific variable import options, returned as an array of variable import options objects. The array contains an object corresponding to each variable specified in the `VariableNames` property. Each object in the array contains properties that support the importing of data with a specific data type.

Variable options support these data types: numeric, text, `logical`, `datetime`, or `categorical`.

To query the current (or detected) options for a variable, use the `getvaropts` function.

To set and customize options for a variable, use the `setvaropts` function.

Example: `opts.VariableOptions` returns a collection of `VariableImportOptions` objects, one corresponding to each variable in the data.

Example: `getvaropts(opts,'Height')` returns the `VariableImportOptions` object for the `Height` variable.

Example: `opts = setvaropts(opts,'Height','FillValue',0)` sets the `FillValue` property for the variable `Height` to `0`.

Location Properties

`DataLine` — Data start location
positive scalar integer

Data start location, specified as a positive scalar integer. The `DataLine` property specifies the line number where data begins in the text file.

The value for the `DataLine` property must be greater than `0`.

Example: `opts.DataLine = 5;`

Data Types: `single` | `double` | `uint8` | `uint16` | `uint32` | `uint64`

`RowNamesColumn` — Row names location

`0` (default) | positive scalar integer

Row names location, specified as a positive scalar integer. The `RowNamesColumn` property specifies the location of the column containing the row names.

If `RowNamesColumn` is specified as 0, then do not import the row names. Otherwise, import the row names from the specified column.

Example: `opts.RowNamesColumn = 2;`

Data Types: `single` | `double` | `uint8` | `uint16` | `uint32` | `uint64`

`VariableNamesLine` — Variable names location

`0` (default) | positive scalar integer

Variable names location, specified as a positive scalar integer. The `VariableNamesLine` property specifies the line number where variable names are located.

If `VariableNamesLine` is specified as 0, then do not import the variable names. Otherwise, import the variable names from the specified line.

Example: `opts.VariableNamesLine = 6;`

Data Types: `single` | `double` | `uint8` | `uint16` | `uint32` | `uint64`

`VariableDescriptionsLine` — Variable description location

`0` (default) | positive scalar integer

Variable description location, specified as a positive scalar integer. The `VariableDescriptionsLine` property specifies the line number where variable descriptions are located.

If `VariableDescriptionsLine` is specified as 0, then do not import the variable descriptions. Otherwise, import the variable descriptions from the specified line.

Example: `opts.VariableDescriptionsLine = 7;`

Data Types: `single` | `double` | `uint8` | `uint16` | `uint32` | `uint64`

`VariableUnitsLine` — Variable units location

`0` (default) | positive scalar integer

Variable units location, specified as a positive scalar integer. The `VariableUnitsLine` property specifies the line number where variable units are located.

If `VariableUnitsLine` is specified as 0, then do not import the variable units. Otherwise, import the variable units from the specified line.

Example: `opts.VariableUnitsLine = 8;`

Data Types: `single` | `double` | `uint8` | `uint16` | `uint32` | `uint64`

Delimited Text Properties

`Whitespace` — Characters to treat as white space

character vector

Characters to treat as white space, specified as a character vector of one or more characters.

Example: `' _'`

Example: `'?!.,'`

`LineEnding` — End-of-line characters

`{'\n','\r','\r\n'}` (default) | character vector | cell array of character vectors

End-of-line characters, specified as a character vector of one or more characters or a cell array of character vectors.

Example: `'\n'`

Example: `'\r\n'`

Example: `{'\b',':'}`

Data Types: `char` | `cell`

`CommentStyle` — Style of comments

character vector | cell array of character vectors

Style of comments, specified as a character vector or cell array of character vectors.

For example, specify `CommentStyle` as `'%'` to ignore the text following a percent sign on the same line.

Example: `{'/*'}`

Data Types: `char` | `cell`

`Encoding` — Character encoding scheme
`'UTF-8'` | `'ISO-8859-1'` | `'windows-1251'` | `'windows-1252'` | ...

Character encoding scheme associated with the file, specified as the comma-separated pair consisting of `'Encoding'` and `'system'` or a standard character encoding scheme name like one of the values in this table.

'Big5'	'ISO-8859-1'	'windows-847'
'Big5-HKSCS'	'ISO-8859-2'	'windows-949'
'CP949'	'ISO-8859-3'	'windows-1250'
'EUC-KR'	'ISO-8859-4'	'windows-1251'
'EUC-JP'	'ISO-8859-5'	'windows-1252'
'EUC-TW'	'ISO-8859-6'	'windows-1253'
'GB18030'	'ISO-8859-7'	'windows-1254'
'GB2312'	'ISO-8859-8'	'windows-1255'
'GBK'	'ISO-8859-9'	'windows-1256'
'IBM866'	'ISO-8859-11'	'windows-1257'
'KOI8-R'	'ISO-8859-13'	'windows-1258'
'KOI8-U'	'ISO-8859-15'	'US-ASCII'
	'Macintosh'	'UTF-8'
	'Shift_JIS'	

Example: `'system'` uses the system default encoding.

Replacement Rules

`PartialFieldRule` — Procedure to handle partial fields
`'keep'` | `'fill'` | `'omitrow'` | `'omitvar'` | `'wrap'` | `'error'`

Procedure to handle partial fields in the data, specified as one of the values in this table.

Partial Field Rule	Behavior
`'keep'`	Keep the partial field data and convert the text to the appropriate data type. In some cases, when the importing function is unable to interpret the partial data, a conversion error might occur.
`'fill'`	Replace missing data with the contents of the `FillValue` property. The `FillValue` property is specified in the `VariableImportOptions` object of the variable being imported. For more information on accessing the `FillValue` property, see `getvaropts`.
`'omitrow'`	Omit rows that contain partial data.
`'omitvar'`	Omit variables that contain partial data.
`'wrap'`	Begin reading the next line of characters.
`'error'`	Display an error message and abort the import operation.

Example: `opts.PartialFieldRule = 'keep';`

`EmptyLineRule` — Procedure to handle empty lines
`'skip' | 'read' | 'error'`

Procedure to handle empty lines in the data, specified as `'skip'`, `'read'`, or `'error'`. The importing function interprets white space as empty.

Empty Line Rule	Behavior
`'skip'`	Skip the empty lines.
`'read'`	Import the empty lines. The importing function parses the empty line using the values specified in `VariableWidths`, `VariableOptions`, `MissingRule`, and other relevant properties, such as `Whitespace`.
`'error'`	Display an error message and abort the import operation.

Example: `opts.EmptyLineRule = 'skip';`

`MissingRule` — Procedure to manage missing data

`'fill'` | `'error'` | `'omitrow'` | `'omitvar'`

Procedure to manage missing data, specified as one of the values in this table.

Missing Rule	Behavior
`'fill'`	Replace missing data with the contents of the `FillValue` property. The `FillValue` property is specified in the `VariableImportOptions` object of the variable being imported. For more information on accessing the `FillValue` property, see `getvaropts`.
`'error'`	Stop importing and display an error message showing the missing record and field.
`'omitrow'`	Omit rows that contain missing data.
`'omitvar'`	Omit variables that contain missing data.

Example: `opts.MissingRule = 'omitrow';`

`ImportErrorRule` — Procedure to handle import errors

`'fill'` | `'error'` | `'omitrow'` | `'omitvar'`

Procedure to handle import errors, specified as one of the values in this table.

Import Error Rule	Behavior
`'fill'`	Replace the data where the error occurred with the contents of the `FillValue` property. The `FillValue` property is specified in the `VariableImportOptions` object of the variable being imported. For more information on accessing the `FillValue` property, see `getvaropts`.
`'error'`	Stop importing and display an error message showing the error-causing record and field.
`'omitrow'`	Omit rows where errors occur.

Import Error Rule	Behavior
`'omitvar'`	Omit variables where errors occur.

Example: `opts.ImportErrorRule = 'omitvar';`

`ExtraColumnsRule` — Procedure to handle extra columns
`'addvars'` | `'ignore'` | `'wrap'` | `'error'`

Procedure to handle extra columns in the data, specified as one of the values in this table.

Extra Columns Rule	Behavior
`'addvars'`	To import extra columns, create new variables. If there are `N` extra columns, then import new variables as `'ExtraVar1', 'ExtraVar2',..., 'ExtraVarN'`. NOTE: The extra columns are imported as text with data type`char`.
`'ignore'`	Ignore the extra columns of data.
`'wrap'`	Wrap the extra columns of data to new records. This action does not change the number of variables.
`'error'`	Display an error message and abort the import operation.

Example:

Object Functions

getvaropts	Get variable import options
setvaropts	Set variable import options
setvartype	Set variable data types

Examples

Create Import Options Object to Read Fixed-Width Text File

Examine a fixed-width formatted text file, create an import options object, and use the object to import the table from the text file.

Load and Preview Fixed-Width Text File

Load the file `fixed_width_patients_subset_perfect.txt` and preview its contents in a text editor. The screen shot shows that the file contains fixed-width formatted data.

```
filename = fullfile(matlabroot,'examples','matlab','fixed_width_patients_subset_perfect
```

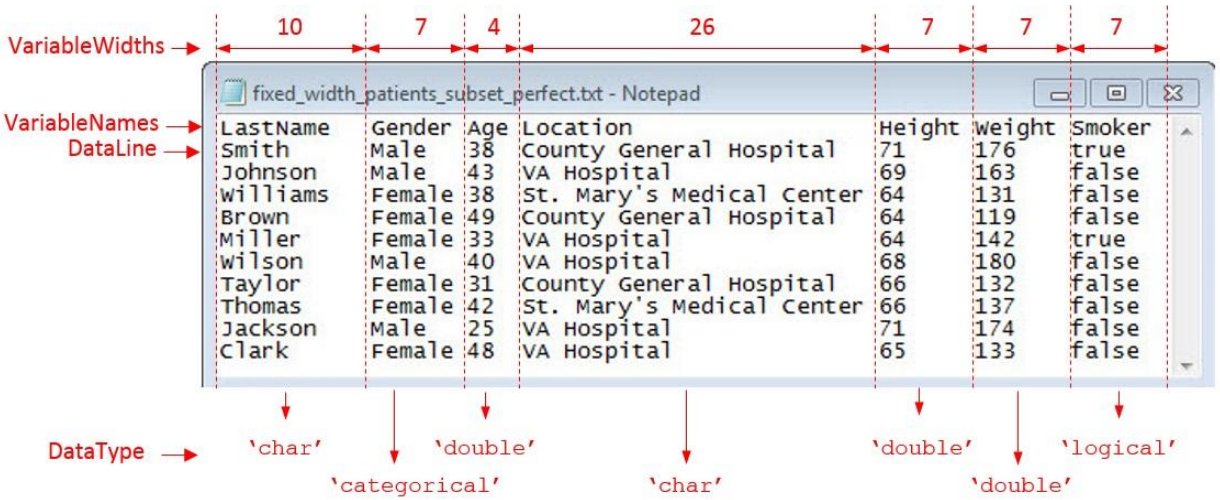

Examine and Extract Properties of Fixed-Width File

The fixed-width text file has tabular data organized by starting location, variable names, and variable widths. Capture these properties and the desired data type for the variables.

```
DataStartLine = 2;
VariableNames  = {'LastName','Gender','Age','Location','Height',...
                                                 'Weight','Smoker'};
VariableWidths = [ 10,     7,     4,    26,     7, ...
                                                    7,     7 ] ;
DataType       = {'char','categorical','double','char','double',...
                                                'double','logical'};
```

Create and Configure `FixedWidthImportOptions` Object

Create a `FixedWidthImportOptions` object and configure its properties to match the properties of the data in `fixed_width_patients_subset_perfect.txt`.

```
opts = matlab.io.text.FixedWidthImportOptions;
opts.DataLine = DataStartLine;
opts.VariableNames = VariableNames;
opts.VariableWidths = VariableWidths;
opts = setvartype(opts,VariableNames,DataType);
```

Import Table

Use `readtable` with the `FixedWidthImportOptions` object to import the table.

```
T = readtable(filename,opts)
```

```
T = 10×7 table
     LastName      Gender    Age              Location                Height    Weight    S
    __________     ______    ___    ______________________________    ______    ______    _

    'Smith'        Male      38     'County General Hospital'         71        176       t
    'Johnson'      Male      43     'VA Hospital'                     69        163       t
    'Williams'     Female    38     'St. Mary's Medical Center'       64        131       t
    'Brown'        Female    49     'County General Hospital'         64        119       t
    'Miller'       Female    33     'VA Hospital'                     64        142       t
    'Wilson'       Male      40     'VA Hospital'                     68        180       t
    'Taylor'       Female    31     'County General Hospital'         66        132       t
    'Thomas'       Female    42     'St. Mary's Medical Center'       66        137       t
    'Jackson'      Male      25     'VA Hospital'                     71        174       t
    'Clark'        Female    48     'VA Hospital'                     65        133       t
```

Import Messy Data from Fixed-Width Formatted Text File

Create an import options object to import messy data from a fixed-width formatted text file. Configure the object to handle the messy data and use it to import the table.

Load and Preview Fixed-Width Text File

Load the file `fixed_width_patients_subset_messy.txt` and preview its contents in a text editor. A screen shot is shown below. The screen shot shows that the file contains:

- Empty lines – Lines 7, 12, and 13
- An extra column – Column 8
- Missing data – Lines 1, 4, 9 and 11
- Partial fields – Last 3 rows

```
filename = fullfile(matlabroot,'examples','matlab','fixed_width_patients_subset_messy.t
```

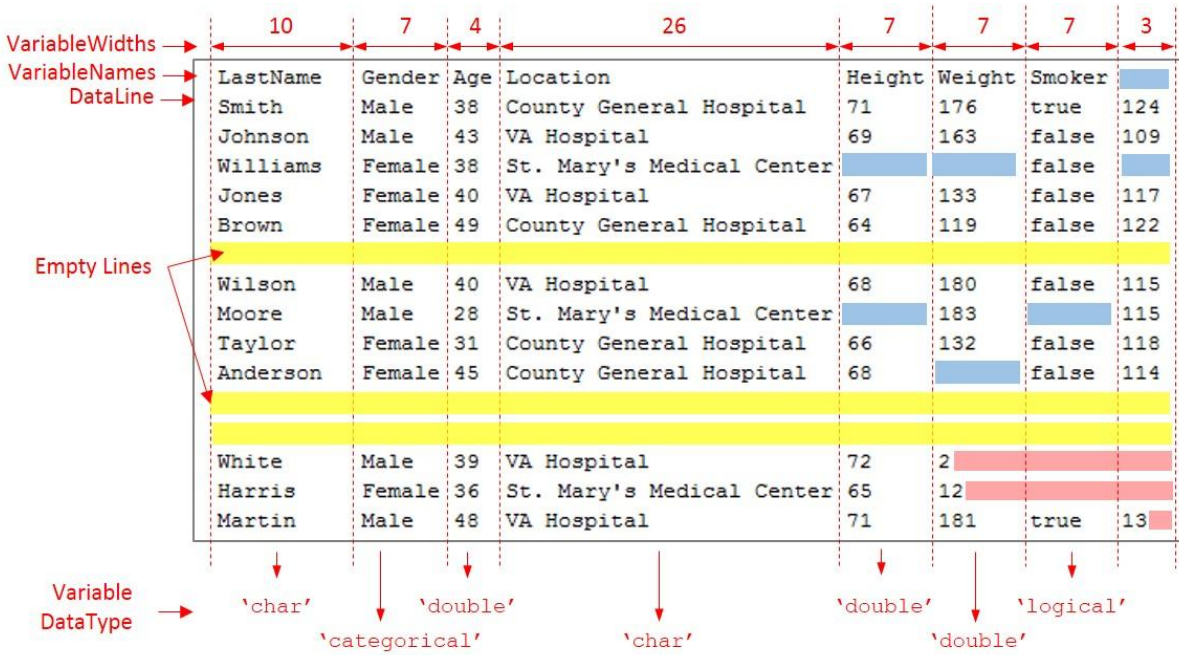

Examine and Capture Properties of Fixed-Width File

The fixed-width text file has tabular data organized by the staring location, variable names, and variable widths. Capture these properties and the data type you want to use for the variables.

```
DataStartLine = 2;
VariableNames  = {'LastName','Gender','Age','Location','Height',...
                                                 'Weight','Smoker'};
VariableWidths = [ 10,     7,     4,    26,     7, ...
                                                    7,     7 ] ;
DataType       = {'char','categorical','double','char','double',...
                                                'double','logical'};
```

Create `FixedWidthImportOptions` Object and Set Up Variable Properties

Create a `FixedWidthImportOptions` object and configure its properties to match the properties of the data.

```
opts = matlab.io.text.FixedWidthImportOptions;
```

```
opts.DataLine = DataStartLine;
opts.VariableNames = VariableNames;
opts.VariableWidths = VariableWidths;
opts = setvartype(opts,VariableNames,DataType);
```

Set Up `EmptyLinesRule`, `Missing Rule`, and `ExtraColumnsRule`

Read the empty lines in the data by setting the `EmptyLineRule` to `'read'`. Next, fill the missing instances with predefined values by setting the `MisingRule` to `'fill'`. Finally, to ignore the extra column during the import, set the `ExtraColumnsRule` to `'ignore'`. For more inormation on the properties and their values, see documentation for `FixedWidthImportOptions`.

```
opts.EmptyLineRule = 'read';
opts.MissingRule = 'fill';
opts.ExtraColumnsRule ='ignore';
```

Set Up `PartialFieldRule`

Partial fields occur when the importing function reaches the end-of-line character before the full variable width is traversed. For example, in this preview, the last three rows from the file `fixed_width_patients_subset_messy.txt`. Here, in the last row of the last column, the end-of-line character appears after two places from the start of the field, before the full variable-width of three is reached.

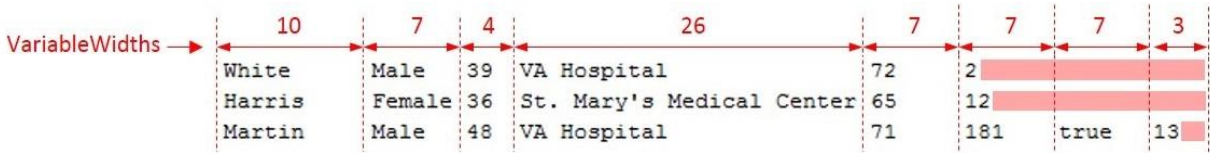

This occurrence of a partial field somtimes can indicate an error. Therefore, use the `ParitalFieldRule` to decide how to handle this data. To keep the partial field data and convert it to the appropriate data type, set the `ParitalFieldRule` to `'keep'`. For more infromation on the `ParitalFieldRule`, see documentation for `FixedWidthImportOptions`.

```
opts.PartialFieldRule = 'keep';
```

Import Table

Import the table by using `readtable` function and the `FixedWidthImportOptions` object and preview the data.

```
T = readtable(filename,opts)
```

```
T = 15×7 table
     LastName       Gender       Age             Location              Height    Weight
    __________    ___________    ___    ____________________________    ______    ______

    'Smith'       Male            38    'County General Hospital'        71       176
    'Johnson'     Male            43    'VA Hospital'                    69       163
    'Williams'    Female          38    'St. Mary's Medical Center'     NaN       NaN
    'Jones'       Female          40    'VA Hospital'                    67       133
    'Brown'       Female          49    'County General Hospital'        64       119
    ''            <undefined>    NaN    ''                              NaN       NaN
    'Wilson'      Male            40    'VA Hospital'                    68       180
    'Moore'       Male            28    'St. Mary's Medical Center'     NaN       183
    'Taylor'      Female          31    'County General Hospital'        66       132
    'Anderson'    Female          45    'County General Hospital'        68       NaN
    ''            <undefined>    NaN    ''                              NaN       NaN
    ''            <undefined>    NaN    ''                              NaN       NaN
    'White'       Male            39    'VA Hospital'                    72         2
    'Harris'      Female          36    'St. Mary's Medical Center'      65        12
    'Martin'      Male            48    'VA Hospital'                    71       181
```

See Also

See Also

`detectImportOptions` | `readtable`

Introduced in R2017a

getvaropts

Get variable import options

Syntax

```
varOpts = getvaropts(opts,selection)
```

Description

`varOpts = getvaropts(opts,selection)` returns the variable import options for the variables specified in `selection`.

Examples

Get Import Options for Variable

Access the variable import options object that controls the importing of a variable using the `getvaropts` function.

Create import options from a file. The options object is a collection of individual variable import options.

```
opts = detectImportOptions('patients.xls')
```

```
opts 
  SpreadsheetImportOptions with properties:

   Sheet Properties:
                        Sheet: ''

   Replacement Properties:
                  MissingRule: 'fill'
              ImportErrorRule: 'fill'

   Variable Import Properties:  Set types by name using setvartype
                VariableNames: {'LastName', 'Gender', 'Age' ... and 7 more}
                VariableTypes: {'char', 'char', 'double' ... and 7 more}
           SelectedVariableNames: {'LastName', 'Gender', 'Age' ... and 7 more}
```

```
              VariableOptions: Show all 10 VariableOptions
 Access VariableOptions sub-properties using setvaropts/getvaropts

   Range Properties:
                   DataRange: 'A2' (Start Cell)
           VariableNamesRange: 'A1'
                RowNamesRange: ''
           VariableUnitsRange: ''
    VariableDescriptionsRange: ''
```

Get the variable import options object for the specified variable.

```
varOpts = getvaropts(opts, 'Systolic')
```

```
varOpts 
  NumericVariableImportOptions with properties:

   Variable Properties:
                 Name: 'Systolic'
                 Type: 'double'
            FillValue: NaN
        TreatAsMissing: {}
             QuoteRule: 'remove'

   Numeric Options:
     ExponentCharacter: 'eEdD'
      DecimalSeparator: '.'
    ThousandsSeparator: ''
```

To modify the variable import options, see the `setvaropts` and `setvartype` function reference pages.

Input Arguments

`opts` — File import options

`SpreadsheetImportOptions` | `DelimitedtextImportOptions` | `FixedWidthImportOptions`

File import options, specified as a `SpreadsheetImportOptions`, `DelimitedTextImportOptions`, or a `FixedWidthImportOptions` object created

by the `detectImportOptions` function. The `opts` object contains properties that control the data import process, such as variable properties, data location properties, replacement rules, and others.

`selection` — Selected variables
character vector | cell array of character vector | array of indices

Selected variables, specified as a character vector, cell array of character vectors, or an array of numeric indices.

Variable names (or indices) must be a subset of the names contained in the `VariableNames` property of the `opts` object.

Example: `'Height'`

Example: `{'Height','LastName'}`

Example: `[5 9]`

Data Types: `char` | `cell` | `uint64`

Output Arguments

`varOpts` — Type dependent options for selected variables
array of variable import options objects

Type dependent options for selected variables, returned as an array of variable import options objects. The array contains an object corresponding to each variable specified in the `selection` argument. Depending on the data types of the variables, each object in the array is one of these types: numeric, text, `logical`, `datetime`, and `categorical`.

You can modify properties of the individual objects.

- To modify the `Type` property, use the `setvartype` function.
- To modify other properties, use the `setvaropts` function.

See Also

See Also
`detectImportOptions` | `setvaropts` | `setvartype`

Introduced in R2016b

setvaropts

Set variable import options

Syntax

```
opts = setvaropts(opts,Name,Value)
opts = setvaropts(opts,selection,Name,Value)
```

Description

`opts = setvaropts(opts,Name,Value)` updates all the variables in the `opts` object based on the specifications in the `Name,Value` arguments.

`opts = setvaropts(opts,selection,Name,Value)` updates and returns an `opts` object for the variables specified in the `selection` argument, based on the specifications in the `Name,Value` arguments.

Examples

Set Options for Selected Variables

Create an import options object, set the options for selected variables, and import the data using the tailored options and the `readtable` function.

Create an options object for the spreadsheet `patients.xls`.

```
opts = detectImportOptions('patients.xls');
```

Set the `FillValue` property for the `Smoker`, `Diastolic`, and `Systolic` variables.

```
opts = setvaropts(opts,'Smoker','FillValue',false);
opts = setvaropts(opts,{'Diastolic','Systolic'},'FillValue',0);
```

Select the variables you want to import.

```
opts.SelectedVariableNames = {'Smoker','Diastolic','Systolic'};
```

Import the variables and display a summary.

```
T = readtable('patients.xls',opts);
summary(T)
```

```
Variables:

    Smoker: 100×1 logical

        Values:

            True     34
            False    66

    Diastolic: 100×1 double

        Values:

            Min         68
            Median    81.5
            Max         99

    Systolic: 100×1 double

        Values:

            Min       109
            Median    122
            Max       138
```

Set Options for Numeric Data Containing Missing or Incomplete Records

Importing data that has missing or incomplete fields requires recognizing the missing instances and deciding how the missing instances will be imported. Use `importOptions` to capture both these decisions and fetch the data using `readtable`.

Create an import options object for the file, update properties that control the import of missing data, use `readtable` to import the data. Note that the dataset `airlinesmall.csv` has two numeric variables `ArrDelay` and `DepDelay`, that contain missing data indicated by `NA`.

	O	P	Q	R	S
1	ArrDelay	DepDelay	Origin	Dest	Distance
167	-1	0	MEM	JAN	189
168	102	105	MEM	CVG	403
169	-11	0	ABE	DTW	424
170	NA	NA	MSP	BUF	734
171	-1	0	MEM	BNA	200
172	0	0	STL	DTW	440
173	1	0	VPS	MEM	369
174	1	0	MSP	IAD	908
175	14	0	CLE	DTW	95
176	-14	0	JAN	MEM	189
177	5	0	SEA	PDX	129
178	25	38	MSP	ATW	236
179	0	-5	DTW	CAK	133
180	NA	NA	MIA	MCO	193
181	6	0	DCA	LGA	214

Create an import options object from the file.

```
opts = detectImportOptions('airlinesmall.csv');
```

Use the `TreatAsMissing` property to specify the characters in the data that are place holders for missing instances. In this example, the two numeric variables `ArrDelay` and `DepDelay` contain missing fields that contain the text `NA`.

```
opts = setvaropts(opts,{'ArrDelay','DepDelay'},'TreatAsMissing','NA');
```

Specify the action for the importing function to take when importing missing instances. See `ImportOptions` properties page for more options.

```
opts.MissingRule = 'fill';
```

Specify the value to use when the importing function finds a missing instance. Here the missing instances in variables `ArrDelay` and `DepDelay` are replaced by `0`.

```
opts = setvaropts(opts,{'ArrDelay','DepDelay'},'FillValue',0);
```

Select the variables you want to work with and import them using `readtable`.

```
opts.SelectedVariableNames = {'ArrDelay','DepDelay'};
T = readtable('airlinesmall.csv',opts);
```

Examine the values in `ArrDelay` and `DepDelay`. Verify that the importing function replaced the missing values denoted by `NA`.

```
T(166:180,:)
```

```
ans = 15×2 table
    ArrDelay    DepDelay
    ________    ________

     -1            0
    102          105
    -11            0
      0            0
     -1            0
      0            0
      1            0
      1            0
     14            0
    -14            0
      5            0
     25           38
      0           -5
      0            0
      6            0
```

Set Options When Importing Text Data

Use the `setvaropts` function to update properties that control the import of text data. First, get the import options object for the file. Next, examine and update the options for the text variables. Finally, import the variables using the `readtable` function.

Preview the data in `patients.xls`. Notice the text data in the column `LastName`. Only a preview of the first 10 rows is shown here.

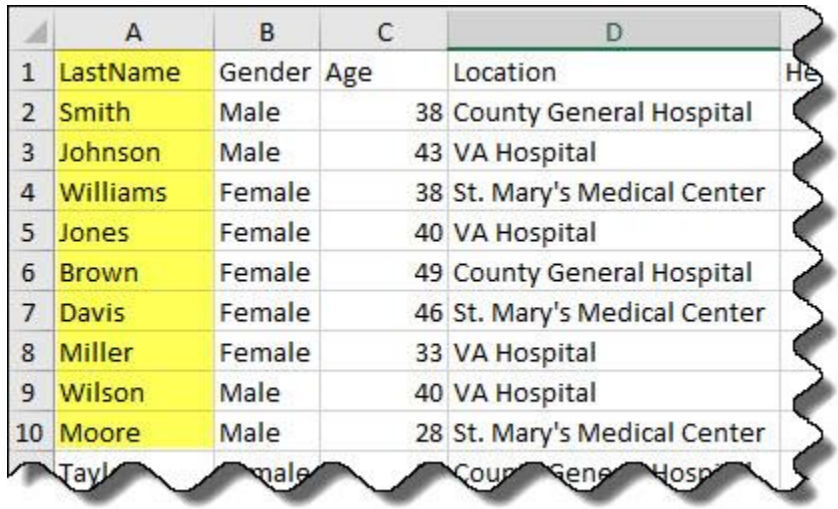

	A	B	C	D
1	LastName	Gender	Age	Location
2	Smith	Male	38	County General Hospital
3	Johnson	Male	43	VA Hospital
4	Williams	Female	38	St. Mary's Medical Center
5	Jones	Female	40	VA Hospital
6	Brown	Female	49	County General Hospital
7	Davis	Female	46	St. Mary's Medical Center
8	Miller	Female	33	VA Hospital
9	Wilson	Male	40	VA Hospital
10	Moore	Male	28	St. Mary's Medical Center

Get the import options object.

```
opts = detectImportOptions('patients.xls');
```

Get and examine the `VariableImportOptions` for variable `LastName`.

```
getvaropts(opts,'LastName')
```

```
ans = 
  TextVariableImportOptions with properties:

   Variable Properties:
               Name: 'LastName'
               Type: 'char'
          FillValue: ''
     TreatAsMissing: {}
          QuoteRule: 'remove'

   String Options:
    WhitespaceRule: 'trim'
```

Set the data type of the variable to `string`.

```
opts = setvartype(opts,'LastName','string');
```

Set the `FillValue` property of the variable to replace missing values with `'NoName'`.

```
opts = setvaropts(opts,'LastName','FillValue','NoName');
```

Select, read, and display a preview of the first 10 rows of the variable.

```
opts.SelectedVariableNames = 'LastName';
T = readtable('patients.xls',opts);
T.LastName(1:10)
```

```
ans = 10×1 string array
    "Smith"
    "Johnson"
    "Williams"
    "Jones"
    "Brown"
    "Davis"
    "Miller"
    "Wilson"
    "Moore"
    "Taylor"
```

Set Options When Importing Logical Data

Use the `setvaropts` function to update properties that control the import of `logical` data. First, get the import options object for the file. Next, examine and update the options for the logical variables. Finally, import the variables using the `readtable` function.

Preview the data in `airlinesmall_subset.xlsx`. Notice the logical data in the column `Cancelled`. Only a preview of rows 30 to 40 is shown here.

	R	S	T	U	V
1	Dest	Distance	TaxiIn	TaxiOut	Cancelled
30	LAX	373	7	11	0
31	LGA	214	4	11	0
32	LGA	733	5	10	0
33	MAF	429	0	0	1
34	MCI	1499	6	13	0
35	MCO	758	9	9	0
36	MDW	307	8	15	0
37	MEM	200	3	9	0
38	MFE	316	3	10	0
39	MIA	1090	7	85	0
40	MLB	443	5	14	0
41	MSP	680	3	10	0

Get the import options object.

```
opts = detectImportOptions('airlinesmall_subset.xlsx');
```

Get and examine the `VariableImportOptions` for variable `Cancelled`.

```
getvaropts(opts,'Cancelled')
```

```
ans = 
  NumericVariableImportOptions with properties:

   Variable Properties:
                   Name: 'Cancelled'
                   Type: 'double'
              FillValue: NaN
          TreatAsMissing: {}
              QuoteRule: 'remove'

   Numeric Options:
     ExponentCharacter: 'eEdD'
      DecimalSeparator: '.'
    ThousandsSeparator: ''
```

Set the data type of the variable to `logical`.

```
opts = setvartype(opts,'Cancelled','logical');
```

Set the `FillValue` property of the variable to replace missing values with `true`.

```
opts = setvaropts(opts,'Cancelled','FillValue',true);
```

Select, read, and display a summary of the variable.

```
opts.SelectedVariableNames = 'Cancelled';
T = readtable('airlinesmall_subset.xlsx',opts);
summary(T)
```

```
Variables:

    Cancelled: 1338×1 logical

        Values:

            True       29
            False    1309
```

Importing Date and Time Data

Use `DatetimeVariableImportOptions` properties to control the import of `datetime` data. First, get the `ImportOptions` object for the file. Next, examine and update the `VariableImportOptions` for the datetime variables. Finally, import the variables using `readtable`.

Preview of data in `outages.csv`. Notice the date and time data in the columns `OutageTime` and `RestorationTime`. Only the first 10 rows are shown here.

	A	B	C	D	E	F
1	Region	OutageTime	Loss	Customers	RestorationTime	Cause
2	SouthWest	2/1/2002 12:18	458.977222	1820159.482	2/7/2002 16:50	winter storm
3	SouthEast	1/23/2003 0:49	530.13995	212035.3001		winter storm
4	SouthEast	2/7/2003 21:15	289.403549	142938.6282	2/17/2003 8:14	winter storm
5	West	4/6/2004 5:44	434.805352	340371.0338	4/6/2004 6:10	equipment fault
6	MidWest	3/16/2002 6:18	186.436779	212754.055	3/18/2002 23:23	severe storm
7	West	6/18/2003 2:49	0	0	6/18/2003 10:54	attack
8	West	6/20/2004 14:39	231.294723		6/20/2004 19:16	equipment fault
9	West	6/6/2002 19:28	311.860732		6/7/2002 0:51	equipment fault
10	NorthEast	7/16/2003 16:23	239.932847	49434.48932	7/17/2003 1:12	fire

Get the import options object.

```
opts = detectImportOptions('outages.csv');
```

Get and examine the `VariableImportOptions` for datetime variables `OutageTime` and `RestorationTime`.

```
varOpts = getvaropts(opts,{'OutageTime','RestorationTime'})
```

```
varOpts 
  1×2 DatetimeVariableImportOptions array with properties:

    DatetimeFormat
    DatetimeLocale
    InputFormat
    Type
    FillValue
    Name
    QuoteRule
    TreatAsMissing
```

Set the `FillValue` property of the variables to replace missing values with current date and time.

```
opts = setvaropts(opts,{'OutageTime','RestorationTime'},...
                                                 'FillValue','now');
```

Select, read, and preview the two variables. Notice the missing value in the second row of `RestorationTime` has been filled with current date and time.

```
opts.SelectedVariableNames = {'OutageTime','RestorationTime'};
T = readtable('outages.csv',opts);
T(1:10,:)
```

```
ans = 10×2 table
         OutageTime           RestorationTime
    ____________________    ____________________

    01-Feb-2002 12:18:00    07-Feb-2002 16:50:00
    23-Jan-2003 00:49:00    24-Feb-2017 12:47:28
    07-Feb-2003 21:15:00    17-Feb-2003 08:14:00
    06-Apr-2004 05:44:00    06-Apr-2004 06:10:00
    16-Mar-2002 06:18:00    18-Mar-2002 23:23:00
    18-Jun-2003 02:49:00    18-Jun-2003 10:54:00
    20-Jun-2004 14:39:00    20-Jun-2004 19:16:00
    06-Jun-2002 19:28:00    07-Jun-2002 00:51:00
    16-Jul-2003 16:23:00    17-Jul-2003 01:12:00
    27-Sep-2004 11:09:00    27-Sep-2004 16:37:00
```

Set Options When Importing Categorical Data

Use the `setvaropts` function to update properties that control the import of `categorical` data. First, get the import options object for the file. Next, examine and update the options for the categorical variables. Finally, import the variables using the `readtable` function.

Preview the data in `outages.csv`. Notice the categorical data in the columns `Region` and `Cause`. This table shows only the first 10 rows.

	A	B	C	D	E	F
1	Region	OutageTime	Loss	Customers	RestorationTime	Cause
2	SouthWest	2/1/2002 12:18	458.977222	1820159.482	2/7/2002 16:50	winter storm
3	SouthEast	1/23/2003 0:49	530.13995	212035.3001		winter storm
4	SouthEast	2/7/2003 21:15	289.403549	142938.6282	2/17/2003 8:14	winter storm
5	West	4/6/2004 5:44	434.805352	340371.0338	4/6/2004 6:10	equipment fault
6	MidWest	3/16/2002 6:18	186.436779	212754.055	3/18/2002 23:23	severe storm
7	West	6/18/2003 2:49	0	0	6/18/2003 10:54	attack
8	West	6/20/2004 14:39	231.294723		6/20/2004 19:16	equipment fault
9	West	6/6/2002 19:28	311.860732		6/7/2002 0:51	equipment fault
10	NorthEast	7/16/2003 16:23	239.932847	49434.48932	7/17/2003 1:12	fire

Get the import options object.

```
opts = detectImportOptions('outages.csv');
```

Get and examine the options for variables `Region` and `Cause`.

```
getvaropts(opts,{'Region','Cause'})
```

```
ans = 
  1×2 TextVariableImportOptions array with properties:

    WhitespaceRule
    Type
    FillValue
    Name
    QuoteRule
    TreatAsMissing
```

Set the data type of the variables to `categorical`.

```
opts = setvartype(opts,{'Region','Cause'},'categorical');
```

Set the `FillValue` property of the variables to replace missing values with category name `'Miscellaneous'`. Set `TreatAsMissing` property to `'unknown'`.

```
opts = setvaropts(opts,{'Region','Cause'},...
                                    'FillValue','Miscellaneous',...
                                    'TreatAsMissing','unknown');
```

Select, read, and display a summary of the two variables.

```
opts.SelectedVariableNames = {'Region','Cause'};
T = readtable('outages.csv',opts);
summary(T)
```

```
Variables:

    Region: 1468×1 categorical

        Values:

            MidWest      142
            NorthEast    557
            SouthEast    389
            SouthWest     26
            West         354
```

```
Cause: 1468×1 categorical

    Values:

        Miscellaneous        24
        attack              294
        earthquake            2
        energy emergency    188
        equipment fault     156
        fire                 25
        severe storm        338
        thunder storm       201
        wind                 95
        winter storm        145
```

Input Arguments

`opts` — File import options

`SpreadsheetImportOptions` | `DelimitedtextImportOptions` | `FixedWidthImportOptions`

File import options, specified as a `SpreadsheetImportOptions`, `DelimitedTextImportOptions`, or a `FixedWidthImportOptions` object created by the `detectImportOptions` function. The `opts` object contains properties that control the data import process, such as variable properties, data location properties, replacement rules, and others.

`selection` — Selected variables

character vector | cell array of character vector | array of indices

Selected variables, specified as a character vector, cell array of character vectors, or an array of numeric indices.

Variable names (or indices) must be a subset of the names contained in the `VariableNames` property of the `opts` object.

Example: `'Height'`

Example: `{'Height','LastName'}`

Example: `[5 9]`

Data Types: `char` | `cell` | `uint64`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `opts = setvaropts(opts,'Weight','FillValue',0)` sets the `FillValue` for the variable `Weight` to `0`.

Common Options

`'FillValue'` — Replacement value for missing data

character vector | scalar numeric value | `true` | `false`

Replacement value for missing data, depending on the type of the variable, specified as a character vector, a scalar numeric, or a logical value `true` or `false`.

Type of Variable	Description
Text	Character vector containing the replacement text **Example:** `'not applicable'`
Numeric	Scalar numeric to replace missing instances The importing function converts the input for `FillValue` to the data type specified by the `Type` property of the variable. For example, if `Type` property value is `uint8`, then the importing function also converts the value of the `FillValue` property to `uint8`. **Example:** `0`
Logical	Character vector containing `true` or `false`.

Type of Variable	Description
	Example: `false`
Datetime	Character vector or a scalar value representing date and time data. For more information on valid `datetime` inputs, see the `datetime` function page. **Example:** `'now'` sets the missing datetime instances to the current date and time. **Example:** `[1998 12 1]` sets the missing datetime instances to the date December 1st, 1998.
Categorical	Character vector containing the name to use for the replacement category. **Example:** `'Miscellaneous'` assigns the category name Miscellaneous to missing instances in the categorical data.

To direct the import of data that is missing, unconvertible, or that causes errors, use these four properties together: `FillValue`, `TreatAsMissing`, `MissingRule`, and `ErrorRule`. The importing function uses the value specified in the `FillValue` property when:

- Data is unconvertible or matches a value in `TreatAsMissing`.
- `MissingRule` or the `ErrorRule` is set to `fill`.

`'TreatAsMissing'` — Text to interpret as missing data

character vector | cell array of character vectors

Text to interpret as missing data, specified as a character vector or a cell array of character vectors.

When the importing function finds missing instances, it uses the specification in the `MissingRule` property to determine the appropriate action.

Example: `'TreatAsMissing',{'NA','TBD'}` instructs the importing function to treat any occurrence of `NA` or `TBD` as a missing fields.

Data Types: `char` | `cell`

`'QuoteRule'` — Procedure to manage double quotation marks
`'remove'` | `'keep'` | `'error'`

Procedure to manage double quotation marks in the data, specified as one of the values in this table.

Quote Rule	Process
`'remove'`	If double quotes (") surround characters, then the importing function removes both the opening double quote and the next occurring double quote, which would be interpreted as the closing double quote. **Example:** `"500"` is imported as `500`. If two sets of double quotes (`""`) surround characters, then the importing function removes the first two occurrences. **Example:** `""abc""` is imported as `abc""`. If a pair of opening and closing quotes surrounding characters is followed by a single lone unpaired double quotes, then the importing function ignores the lone unpaired double quote. **Example:** `"abc""` is imported as `abc"`.
`'keep'`	Retain all quotation marks.
`'error'`	Report an error when converting data which begins with a double quotation mark ("). Use this setting if the field should never be quoted.

Example: If the `'QuoteRule'` is set to `'remove'`, then the importing function imports `"abc"def"` as `abcdef"`.

Text Only

`'WhiteSpaceRule'` — Procedure to manage leading and trailing white spaces
`'trim'` (default) | `'trimleading'` | `'trimtrailing'` | `'preserve'`

Procedure to manage leading and trailing white spaces when importing text data, specified as one of the values in the table.

White Space Rule	Process
`'trim'`	Remove any leading or trailing white spaces from the text. Interior white space is unaffected. **Example:** `' World Time '` is imported as `'World Time'`
`'trimleading'`	Remove only the leading white spaces. **Example:** `' World Time '` is imported as `'World Time '`
`'trimtrailing'`	Remove only the trailing white spaces. **Example:** `' World Time '` is imported as `'World Time'`
`'preserve'`	Preserve white spaces. **Example:** `' World Time '` is imported as `' World Time '`

Numeric Only

`'ExponentCharacter'` — Characters indicating exponent

character vector

Characters indicating the exponent, specified as a character vector. The importing function uses the `ExponentCharacter` property to recognize the characters indicating the exponent for a number expressed in the scientific notation.

Example: If `varOpts.ExponentCharacter = 'a'`, then the importing function imports the text `"1.2a3"` as the number `1200`.

`'DecimalSeparator'` — Characters indicating decimal separator

character vector

Characters indicating the decimal separator, specified as a character vector. The importing function uses the `DecimalSeparator` property to distinguish the integer part of a number from the decimal part.

When converting to integer data types, numbers with a decimal part are rounded to the nearest integer.

Example: If `varOpts.DecimalSeparator = ','`, then the importing function imports the text `"3,14159"` as the number `3.14159`.

`'ThousandsSeparator'` — Characters that indicate the thousands grouping
character vector

Characters that indicate the thousands grouping, specified as a character vector. The thousands grouping characters act as visual separators, grouping the number at every three place values. The importing function uses the characters in the `ThousandsSeparator` property to interpret the numbers being imported.

Example: If `varOpts.ThousandsSeparator = ','`, then the importing function imports the text `"1,234,000"` as `1234000`.

Logical Only

`'TrueSymbols'` — Text to treat as logical value `true`
character vector | cell array of character vectors

Text to treat as the logical value `true`, specified as a character vector or a cell array of character vectors.

Example: If `varOpts.TrueSymbols = {'t','TRUE'}`, then the importing function imports any fields containing `t` or `TRUE` as the logical value `true`.

Data Types: `char` | `cell`

`'FalseSymbols'` — Text to treat as logical value `false`
character vector | cell array of character vectors

Text to treat as the logical value `false`, specified as a character vector or a cell array of character vectors.

Example: If `varOpts.FalseSymbols = {'f','FALSE'}`, then the importing function imports any fields containing `f` or `FALSE` as the logical value `false`.

Data Types: `char` | `cell`

`'CaseSensitive'` — Indicator to match case
`true` | `false`

Indicator to match case, specified as a logical value `true` or `false`.

To interpret the input data as missing, `true`, or `false`, the importing function matches the data to values specified in `TreatAsMissing`, `TrueSymbols`, and `FalseSymbols`.

Datetime Only

`'DatetimeFormat'` — Display format

`'default'` | `'defaultdate'` | `'preserveinput'` | custom format | character vector

Display format, specified as a character vector. The `DatetimeFormat` property controls the display format of dates and times in the output. Specify `DatetimeFormat` as one of these values.

Value of `DatetimeFormat`	Description
`'default'`	Use the default display format.
`'defaultdate'`	Use the default display format for datetime values created without time components.
`'preserveinput'`	Use the format specified by the input format, `InputFormat`.
Custom formats	Use the letters `A-Z` and `a-z` to construct a custom value for `DatetimeFormat`. These letters correspond to the Unicode Locale Data Markup Language (LDML) standard for dates. You can include non-ASCII or nonletter characters such as a hyphen, space, or colon to separate the fields. To include the letters `A-Z` and `a-z` as literal characters in the format, enclose them with single quotes.

The factory default format depends on your system locale. To change the default display format, see “Default datetime Format”.

`'InputFormat'` — Format of input text representing dates and times

character vector

Format of the input text representing dates and times, specified as a character vector that contains letter identifiers.

This table shows several common input formats and examples of the formatted input for the date, Saturday, April 19, 2014 at 9:41:06 PM in New York City.

Value of `InputFormat`	Example
`'yyyy-MM-dd'`	`2014-04-19`
`'dd/MM/yyyy'`	`19/04/2014`
`'dd.MM.yyyy'`	`19.04.2014`
`'yyyy# MM# dd#'`	`2014# 04# 19#`
`'MMMM d, yyyy'`	`April 19, 2014`
`'eeee, MMMM d, yyyy h:mm a'`	`Saturday, April 19, 2014 9:41 PM`
`'MMMM d, yyyy HH:mm:ss Z'`	`April 19, 2014 21:41:06 -0400`
`'yyyy-MM-dd''T''HH:mmXXX'`	`2014-04-19T21:41-04:00`

For a complete list of valid letter identifiers, see the Format property for datetime arrays.

Example: `'InputFormat','eeee, MMMM d, yyyy HH:mm:ss'`

`'DatetimeLocale'` — Locale to use for interpreting dates

character vector

Locale to use for interpreting dates, specified as a character vector. The `DatetimeLocale` value determines how the importing function interprets text that represents dates and times.

Set the `DatetimeLocale` value to:

- `'system'`, to specify your system locale.
- or a character vector in the form *`xx_YY`*, where *`xx`* is a lowercase ISO 639-1 two-letter code that specifies a language, and *`YY`* is an uppercase ISO 3166-1 alpha-2 code that specifies a country.

This table lists some common values for the locale.

Locale	Language	Country
`'de_DE'`	German	Germany
`'en_GB'`	English	United Kingdom
`'en_US'`	English	United States
`'es_ES'`	Spanish	Spain

Locale	Language	Country
'fr_FR'	French	France
'it_IT'	Italian	Italy
'ja_JP'	Japanese	Japan
'ko_KR'	Korean	Korea
'nl_NL'	Dutch	Netherlands
'zh_CN'	Chinese (simplified)	China

Example: `varOpts.DatetimeLocale = 'de_DE'` sets the date time locale to German.

Note: The `Locale` value determines how input values are interpreted. The display format and language is specified by the **Locale** option in the **Datetime format** section of the Preferences panel. To change the default datetime locale, see "Set Command Window Preferences".

Categorical Only

`'Categories'` — Expected categories

cell array of character vectors

Expected categories, specified as a cell array of character vectors, containing a list of category names.

Names in the input fields must match one of the names specified in the `Categories` property to avoid a conversion error.

Example: `varOpts.Categories = {'BareLand','Forest','Water','Roads','Buildings'};`

`'Protected'` — Category protection indicator

`false | true | 0 | 1`

Category protection indicator, specified as either `false`, `true`, `0`, or `1`. The categories of ordinal categorical arrays are always protected. If the `Ordinal` property is set to `true`, then the default value for `Protected` is `true`. Otherwise, the value for `Protected` is `false`. For more information on categorical arrays, see the `categorical` function reference page.

`'Ordinal'` — Mathematical ordering indicator
`false` (default) | `true` | `0` | `1`

Mathematical ordering indicator, specified as either `false`, `true`, `0`, or `1`. For more information on categorical arrays, see the `categorical` function reference page.

See Also

See Also
`detectImportOptions` | `getvaropts` | `setvartype`

Introduced in R2016b

setvartype

Set variable data types

Syntax

```
opts = setvartype(opts,type)
opts = setvartype(opts,selection,type)
```

Description

`opts = setvartype(opts,type)` updates all the variables in the `opts` object based on the specified type. `type` must be a character vector or a cell array of character vector of valid data type names.

`opts = setvartype(opts,selection,type)` updates data type for only the variables specified in the `selection` argument.

Examples

Set Data Types for Multiple Variables

Use `detectImportOptions` to create import options, set multiple variable data types, and then read the data using `readtable`.

Create an options object.

```
opts = detectImportOptions('patients.xls');
```

Examine the current (detected) data types of the variables.

```
disp([opts.VariableNames' opts.VariableTypes'])
```

```
    'LastName'                    'char'
    'Gender'                      'char'
    'Age'                         'double'
    'Location'                    'char'
```

```
    'Height'                      'double'
    'Weight'                      'double'
    'Smoker'                      'logical'
    'Systolic'                    'double'
    'Diastolic'                   'double'
    'SelfAssessedHealthStatus'    'char'
```

Change the data type of multiple variables depending on your import needs.

```
opts = setvartype(opts,{'LastName','Gender','Location',...
                    'Smoker','SelfAssessedHealthStatus'},'string');
opts = setvartype(opts,{'Age','Height','Weight',...
                                 'Systolic','Diastolic'},'single');
```

Examine the updated data types of the variables.

```
disp([opts.VariableNames' opts.VariableTypes'])
```

```
    'LastName'                    'string'
    'Gender'                      'string'
    'Age'                         'single'
    'Location'                    'string'
    'Height'                      'single'
    'Weight'                      'single'
    'Smoker'                      'string'
    'Systolic'                    'single'
    'Diastolic'                   'single'
    'SelfAssessedHealthStatus'    'string'
```

Import the variables with their updated types using `readtable`.

```
T = readtable('patients.xls',opts);
```

Input Arguments

`opts` — File import options

`SpreadsheetImportOptions` | `DelimitedtextImportOptions` | `FixedWidthImportOptions`

File import options, specified as a `SpreadsheetImportOptions`, `DelimitedTextImportOptions`, or a `FixedWidthImportOptions` object created

by the `detectImportOptions` function. The `opts` object contains properties that control the data import process, such as variable properties, data location properties, replacement rules, and others.

`selection` — Selected variables

character vector | cell array of character vector | array of indices

Selected variables, specified as a character vector, cell array of character vectors, or an array of numeric indices.

Variable names (or indices) must be a subset of the names contained in the `VariableNames` property of the `opts` object.

Example: `'Height'`

Example: `{'Height','LastName'}`

Example: `[5 9]`

Data Types: `char` | `cell` | `uint64`

`type` — Variable data type

character vector | cell array of character vectors

Variable data type, specified as a character vector or a cell array of character vectors containing valid data type names. The `type` argument designates the data types to use when importing the variable. Import the variables using one of the data types listed here.

Data	MATLAB Data Type
Text	`'char'` or `'string'`
Numeric	`'single'`, `'double'`, `'int8'`, `'int16'`, `'int32'`, `'int64'`, `'uint8'`, `'uint16'`, `'uint32'`, or `'uint64'` Undefined floating-point numbers `NaN`, `-Inf`, `+Inf` are only valid for `single` and `double` data types. Therefore, when you change the type of floating-point data to an integer, the importing function converts the undefined floating-point numbers. For example, when converting to the `'uint8'` data type:

Data	MATLAB Data Type
	• `NaN` is converted to `0`. • `-Inf` is converted to `intmin('int8')`. • `+Inf` is converted to `intmax('int8')`. The same conversion process applies to all the integer data types: `int8`, `int16`, `int16`, `int32`, `int64`, `uint8`, `uint16`, `uint32`, or `uint64`.
Logical	`'logical'`
Date and time	`'datetime'`
Categorical	`'categorical'`

Example: `opts = setvartype(opts,'Height','double')` changes the data type of the variable `Height` to `double`.

Example: `opts = setvartype(opts,{'Weight','LastName'},{'single','string'})` changes the data type of the variable `Weight` to `single` and variable `LastName` to `string`.

Data Types: `cell` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `categorical` | `datetime`

See Also

See Also

`detectImportOptions` | `getvaropts` | `setvaropts`

Introduced in R2016b

SpreadsheetImportOptions

Import options object for Spreadsheets

Description

A `SpreadsheetImportOptions` object enables you to specify how MATLAB imports tabular data from spreadsheet files. The object contains properties that control the data import process, including the handling of errors and missing data. Use a `SpreadsheetImportOptions` object to query the current (detected) values of import properties or to assign new values based on your import needs.

Create Object

Create a `SpreadsheetImportOptions` object using the `detectImportOptions` function.

Properties

Variable Properties

`VariableNames` — Variable names
cell array of character vectors

Variable names, specified as a cell array of character vectors. The `VariableNames` property contains the names to use when importing variables.

If the data contains `N` variables, but no variable names are detected, then the `VariableNames` property contains `{'Var1','Var2',...,'VarN'}`.

Example: `opts.VariableNames` returns the current (detected) variable names.

Example: `opts.VariableNames(3) = {'Height'}` changes the name of the third variable to `Height`.

Data Types: `char | cell`

`VariableTypes` — Variable data types

cell array of character vectors

Variable data types, specified as a cell array of character vectors. The `VariableTypes` property designates the data types to use when importing variables. When assigning new values, specify `VariableTypes` as a cell array of valid data type names.

To update the `VariableTypes` property, use the `setvartype` function.

Example: `opts.VariableTypes` returns the current (detected) variable data types.

Example: `opts = setvartype(opts,'Height',{'double'})` changes the data type of the variable `Height` to `double`.

Data Types: `cell` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `categorical` | `datetime`

`SelectedVariableNames` — Subset of variables to import

character vector | cell array of character vectors | array of numeric indices

Subset of variables to import, specified as a character vector, a cell array of character vectors, or an array of numeric indices.

`SelectedVariableNames` must be a subset of names contained in the `VariableNames` property. By default, `SelectedVariableNames` contains all the variable names from the `VariableNames` property, which means that all variables are imported.

Use the `SelectedVariableNames` property to import only the variables of interest. Specify a subset of variables using the `SelectedVariableNames` property and use `readtable` to import only that subset.

Example: `opts.SelectedVariableNames = {'Height','LastName'}` selects only two variables, `Height` and `LastName`, for the import operation.

Example: `opts.SelectedVariableNames = [1 5]` selects only two variables, the first variable and the fifth variable, for the import operation.

Example: `T = readtable(filename,opts)` returns a table containing only the variables specified in the `SelectedVariableNames` property of the `opts` object.

Data Types: `uint16` | `uint32` | `uint64` | `logical` | `char` | `cell`

`VariableOptions` — Type specific variable import options

array of variable import options objects

Type specific variable import options, returned as an array of variable import options objects. The array contains an object corresponding to each variable specified in the `VariableNames` property. Each object in the array contains properties that support the importing of data with a specific data type.

Variable options support these data types: numeric, text, `logical`, `datetime`, or `categorical`.

To query the current (or detected) options for a variable, use the `getvaropts` function.

To set and customize options for a variable, use the `setvaropts` function.

Example: `opts.VariableOptions` returns a collection of `VariableImportOptions` objects, one corresponding to each variable in the data.

Example: `getvaropts(opts,'Height')` returns the `VariableImportOptions` object for the `Height` variable.

Example: `opts = setvaropts(opts,'Height','FillValue',0)` sets the `FillValue` property for the variable `Height` to `0`.

Location Properties

`Sheet` — Sheet to read from

`''` empty character array (default) | character vector | positive scalar integer

Sheet to read from, specified as an empty character array, a character vector containing the sheet name, or a positive scalar integer denoting the sheet index. Based on the value specified for the `Sheet` property, the import function behaves as described in the table.

Specification	Behavior
`''` (default)	Import data from the first sheet.
name	Import data from the matching sheet name, regardless of order of sheets in the spreadsheet file.
integer	Import data from sheet in the position denoted by the integer, regardless of the sheet names in the spreadsheet file.

Example: `'Sheet7'`

Example: 7

Data Types: `char` | `single` | `double`

`DataRange` — Location of the data to be imported

character vector | positive scalar integer | `''` empty character array

Location of the data to be imported, specified as a character vector, a positive scalar integer, or an empty character array. Specify `DataRange` as one of the values in this table.

Specified by	Behavior
`'Cell'`	Specify the starting cell for the data, using Excel `A1` notation. For example, `A5` is the identifier for the cell at the intersection of column `A` and row `5`. Using the starting cell, the importing function automatically detects the extent of the data, by beginning the import at the start cell and ending at the last empty row or footer range. **Example:** `'A5'`
`'Corner1:Corner2'` Rectangular Range	Specify the exact range to read using the rectangular range form, where *`Corner1`* and *`Corner2`* are two opposing corners that define the region to read. The importing function only reads the data contained in the specified range. Any empty fields within the specified range are imported as missing cells. The number of columns must match the number specified in the `NumVariables` property. **Example:** `'A5:K50'`
`'Row1:Row2'` Row Range	Specify range by identifying the beginning and ending rows using Excel row numbers. Using the specified row range, the importing function automatically detects the column extent by reading from the first nonempty column to the end of the data, and creates one variable per column.

Specified by	Behavior
	Example: `'5:500'`
`'Column1:Column2'` Column Range	Specify range by identifying the beginning and ending columns using Excel column letters or numbers. Using the specified column range, the import function automatically detects the row extent by reading from the first nonempty row to the end of the data or the footer range. The number of columns in the specified range must match the number specified in the `NumVariables` property. **Example:** `'A:K'`
n Number Index	Specify the first row containing the data using the positive scalar row index. Using the specified row index, the importing function automatically detects the extent of the data by reading from the specified first row to the end of the data or the footer range. **Example:** 5
`''` Unspecified or Empty	Do not fetch any data. **Example:** `''`

Data Types: `char` | `single` | `double`

`RowNamesRange` — Location of row names

character vector | positive scalar integer | `''` empty character array

Location of row names, specified as a character vector, positive scalar integer, or an empty character array. Specify `RowNamesRange` as one of the values in this table.

Specified by	Behavior
`'Cell'`	Specify the starting cell for the data, using Excel A1 notation. For example, A5 is the identifier for the cell at the intersection of column A and row 5.

Specified by	Behavior
	The importing function identifies a name for each variable in the data. **Example:** `'A5'`
`'Corner1:Corner2'` Rectangular Range	Specify the exact range to read using the rectangular range form, where *`Corner1`* and *`Corner2`* are two opposing corners that define the region to read. The number of rows contained in `RowNamesRange` must match the number of data rows, and the range indicated by `RowNamesRange` must span only one column. **Example:** `'A5:A50'`
`'Row1:Row2'` Row Range	Specify range by identifying the beginning and ending rows using Excel row numbers. Row names must be in a single column. **Example:** `'5:50'`
n Number Index	Specify the column containing the row names using a positive scalar column index. **Example:** 5
`''` Unspecified or Empty	Indicate that there are no row names. **Example:** `''`

Data Types: `char` | `single` | `double`

`VariableNamesRange` — Location of variable names

character vector | positive scalar integer | `''` empty character array

Location of variable names, specified as a character vector, positive scalar integer, or an empty character array. Specify `VariableNamesRange` as one of the values in this table.

Specified by	Behavior
`'Cell'`	Specify the starting cell for the data, using Excel `A1` notation. For example, `A5` is the identifier for the cell at the intersection of column `A` and row `5`.

Specified by	Behavior
	The importing function reads a name for each variable in the data. **Example:** `'A5'`
`'Corner1:Corner2'` Rectangular Range	Specify the exact range to read using the rectangular range form, where *`Corner1`* and *`Corner2`* are two opposing corners that define the region to read. The number of columns must match the number specified in the `NumVariables` property, and the range must span only one row. **Example:** `'A5:K5'`
`'Row1:Row2'` Row Range	Specify range by identifying the beginning and ending rows using Excel row numbers. Must be a single row. **Example:** `'5:5'`
`n` Number Index	Specify the row containing the variable names using a positive scalar row index. **Example:** `5`
`''` Unspecified or Empty	Indicate that there are no variable names. **Example:** `''`

Data Types: `char` | `single` | `double`

`VariableDescriptionsRange` — Location of variable descriptions

character vector | `''` empty character array

Location of variable descriptions, specified as a character vector, positive scalar integer, or an empty character array. Specify `VariableDescriptionRange` as one of the values in this table.

Specified by	Behavior
`'Cell'`	Specify the starting cell for the data, using Excel `A1` notation. For example, `A5` is the identifier for the cell at the intersection of column `A` and row `5`. The importing function reads a description for each variable in the data. **Example:** `'A5'`
`'Corner1:Corner2'` Rectangular Range	Specify the exact range to read using the rectangular range form, where `Corner1` and `Corner2` are two opposing corners that define the region to read. The number of columns must match the number specified in the `NumVariables` property, and the range must span only one row. **Example:** `'A5:K5'`
`'Row1:Row2'` Row Range	Specify range by identifying the beginning and ending rows using Excel row numbers. Must be a single row. **Example:** `'5:5'`
`n` Number Index	Specify the row containing the descriptions using a positive scalar row index. **Example:** `5`
`''` Unspecified or Empty	Indicate that there are no variable descriptions. **Example:** `''`

Data Types: `char` | `single` | `double`

`VariableUnitsRange` — Location of variable units

character vector | positive scalar integer | `''` empty character array

Location of variable units, specified as a character vector, positive scalar integer, or an empty character array. Specify `VariableUnitsRange` as one of the values in this table.

Specified by	Behavior
`'Cell'`	Specify the starting cell for the data, using Excel `A1` notation. For example, `A5` is the identifier for the cell at the intersection of column `A` and row `5`. The importing function reads a unit for each variable in the data. **Example:** `'A5'`
`'Corner1:Corner2'` Rectangular Range	Specify the exact range to read using the rectangular range form, where `Corner1` and `Corner2` are two opposing corners that define the region to read. The number of columns must match the number specified in the `NumVariables` property, and the range must span only one row. **Example:** `'A5:K5'`
`'Row1:Row2'` Row Range	Specify range by identifying the beginning and ending rows using Excel row numbers. Must be a single row. **Example:** `'5:5'`
`n` Number Index	Specify the row containing the data units using a positive scalar row index. **Example:** `5`
`''` Unspecified or Empty	Indicate that there are no variable units. **Example:** `''`

Data Types: `char` | `single` | `double`

Replacement Rules

`MissingRule` — Procedure to manage missing data

`'fill'` | `'error'` | `'omitrow'` | `'omitvar'`

Procedure to manage missing data, specified as one of the values in this table.

Missing Rule	Behavior
`'fill'`	Replace missing data with the contents of the `FillValue` property. The `FillValue` property is specified in the `VariableImportOptions` object of the variable being imported. For more information on accessing the `FillValue` property, see `getvaropts`.
`'error'`	Stop importing and display an error message showing the missing record and field.
`'omitrow'`	Omit rows that contain missing data.
`'omitvar'`	Omit variables that contain missing data.

Example: `opts.MissingRule = 'omitrow';`

`ImportErrorRule` — Procedure to handle import errors
`'fill'` | `'error'` | `'omitrow'` | `'omitvar'`

Procedure to handle import errors, specified as one of the values in this table.

Import Error Rule	Behavior
`'fill'`	Replace the data where the error occurred with the contents of the `FillValue` property. The `FillValue` property is specified in the `VariableImportOptions` object of the variable being imported. For more information on accessing the `FillValue` property, see `getvaropts`.
`'error'`	Stop importing and display an error message showing the error-causing record and field.
`'omitrow'`	Omit rows where errors occur.
`'omitvar'`	Omit variables where errors occur.

Example: `opts.ImportErrorRule = 'omitvar';`

Object Functions

getvaropts	Get variable import options
setvaropts	Set variable import options
setvartype	Set variable data types

Examples

Create and Use Import Options for Spreadsheet Files

Create import options for a spreadsheet file, specify the variables to import, and then read the data.

Create an import options object from a file.

```
opts = detectImportOptions('patients.xls')
```

```
opts = 
  SpreadsheetImportOptions with properties:

   Sheet Properties:
                        Sheet: ''

   Replacement Properties:
                  MissingRule: 'fill'
              ImportErrorRule: 'fill'

   Variable Import Properties:  Set types by name using setvartype
                VariableNames: {'LastName', 'Gender', 'Age' ... and 7 more}
                VariableTypes: {'char', 'char', 'double' ... and 7 more}
          SelectedVariableNames: {'LastName', 'Gender', 'Age' ... and 7 more}
               VariableOptions: Show all 10 VariableOptions
 Access VariableOptions sub-properties using setvaropts/getvaropts

   Range Properties:
                   DataRange: 'A2' (Start Cell)
            VariableNamesRange: 'A1'
                 RowNamesRange: ''
            VariableUnitsRange: ''
     VariableDescriptionsRange: ''
```

Modify the options object to specify which variables to import.

```
opts.SelectedVariableNames = {'Systolic','Diastolic'};
```

Use `readtable` along with the options object to import the specified variables.

```
T = readtable('patients.xls',opts);
summary(T)
```

```
Variables:

    Systolic: 100×1 double

        Values:

            Min       109
            Median    122
            Max       138

    Diastolic: 100×1 double

        Values:

            Min         68
            Median    81.5
            Max         99
```

See Also

See Also

`detectImportOptions` | `readtable`

Introduced in R2016b

Import Tool

Import data from file

Description

The **Import Tool** lets you preview and import data from spreadsheet files, delimited text files, and fixed-width text files. You can interactively select the data to import and reuse the script or function that the tool generates to import other similar files.

Open the Import Tool App

- MATLAB Toolstrip: On the **Home** tab, in the **Variable** section, click **Import Data**.
- MATLAB command prompt: Enter `uiimport(filename)`, where *`filename`* is a character vector specifying the name of a text or spreadsheet file.

Examples

Select Range to Import

Import ranges of data from a tab-delimited text file and replace nonnumeric values in the file.

Drag the cursor to select the cells to import. Press **Ctrl** to select noncontiguous ranges.

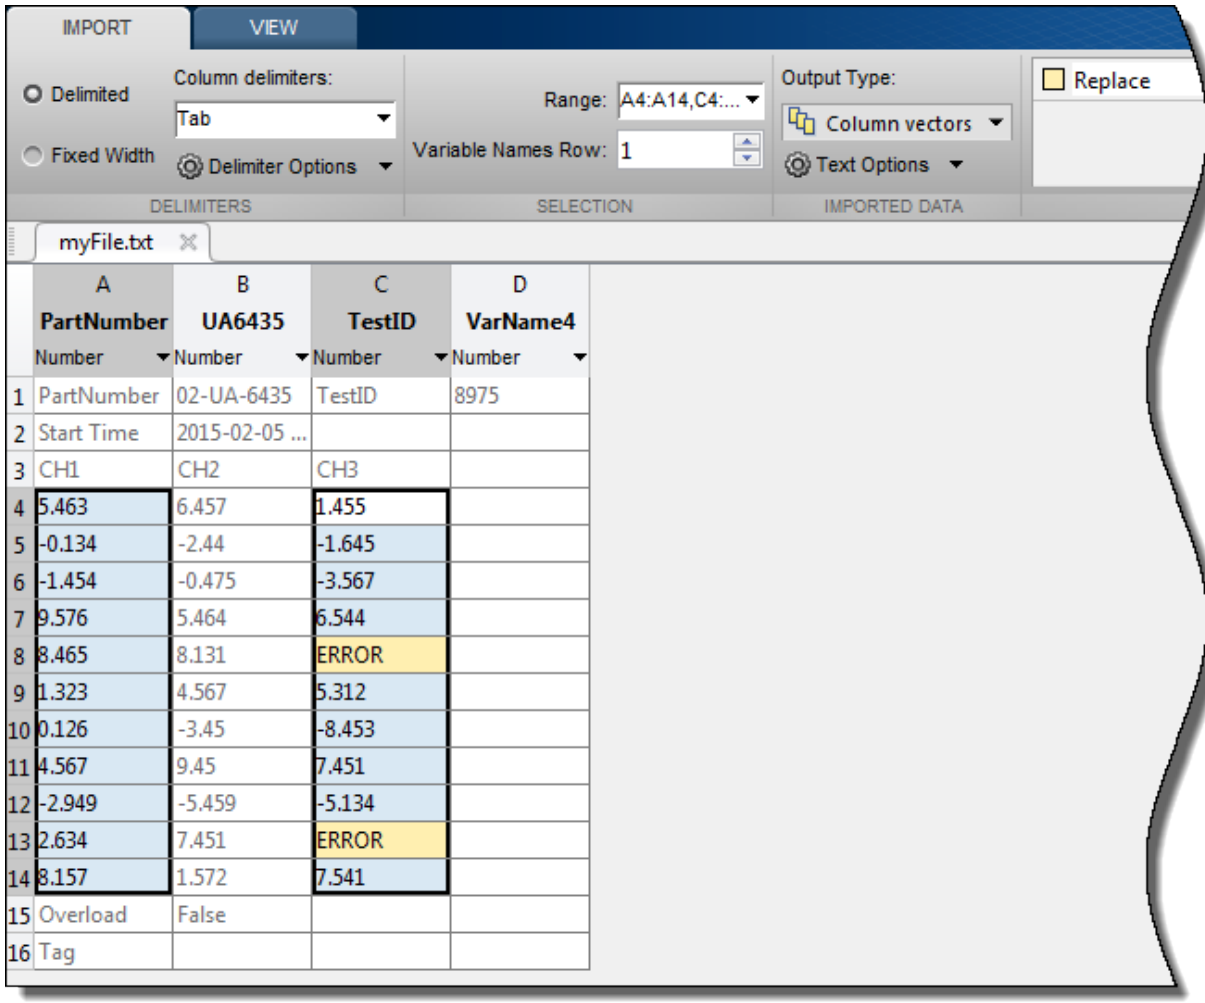

Modify the **Variable Names Row** field to indicate the row you want the Import Tool to use for the variable names.

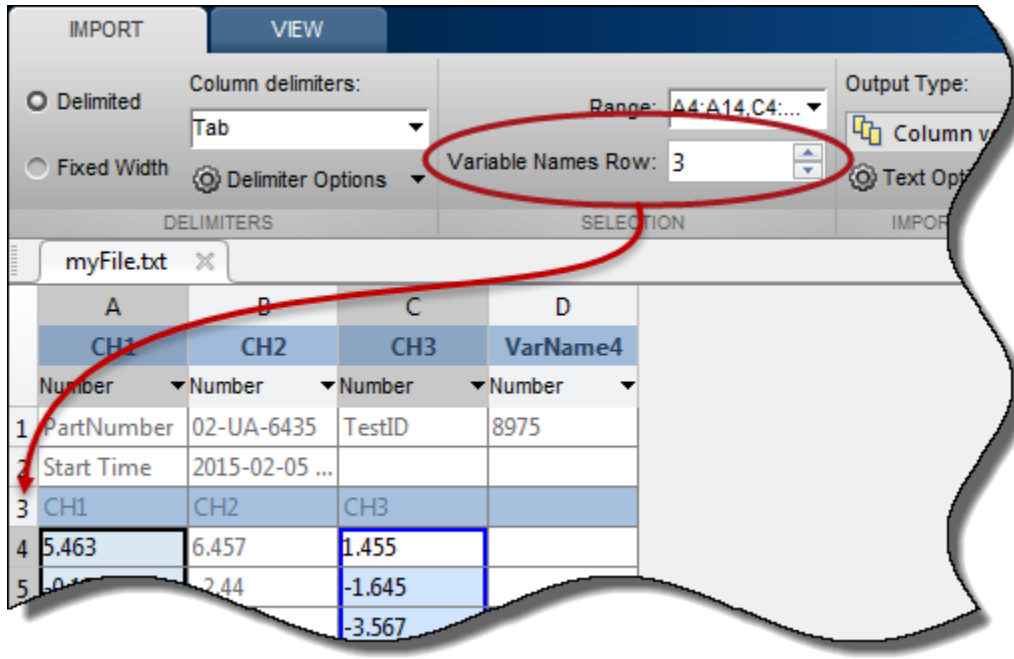

By default, `NaN` replaces unimportable values in numeric cells. However, you can change this value to any other numeric value. Specify how to treat unimportable values on the **Import** tab, in the **Unimportable Cells** section.

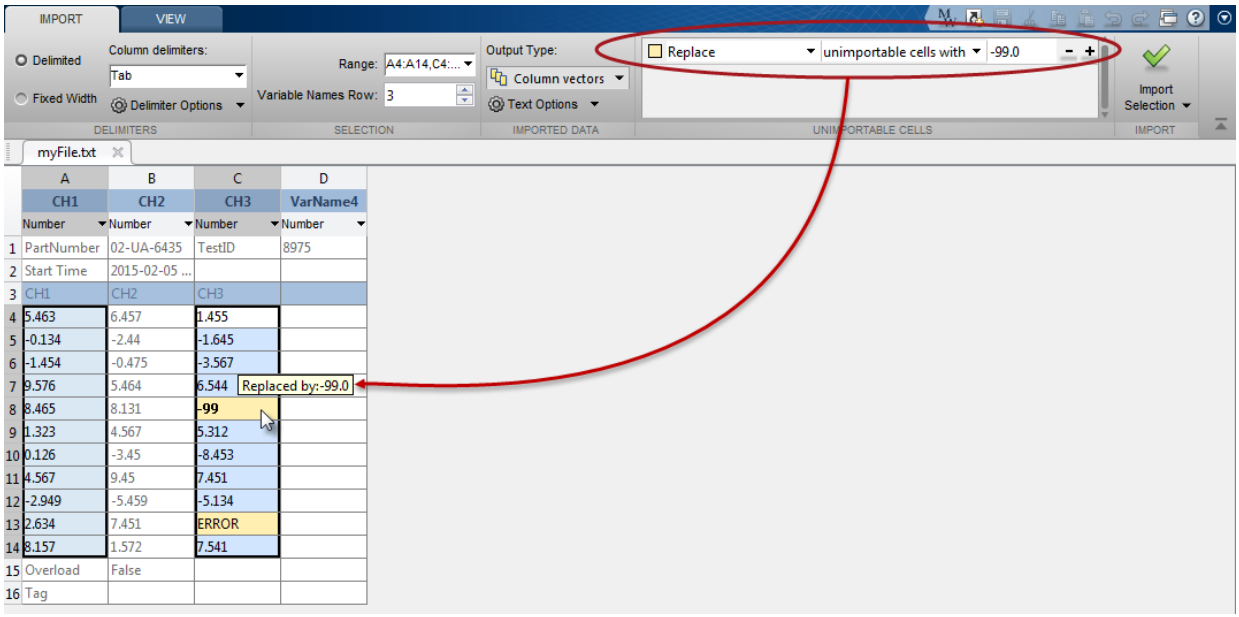

Alternatively, exclude any row that contains an unimportable cell from being imported.

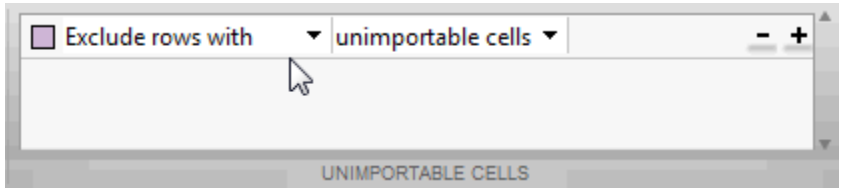

Click **Import Selection** . The new column vectors appear in your workspace.

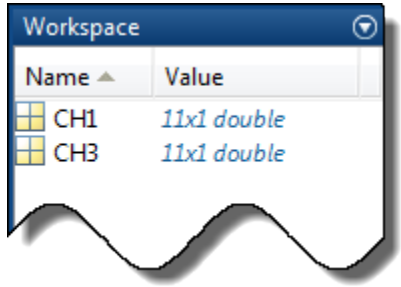

Specify Decimal Separator and Date Format

Import dates and numbers from a text file into a table. Specify the decimal separator for numeric values in the file and a custom format for dates.

In the **Imported Data** section, select **Table** to import the file data into a `table` variable. In this example, the third column of data contains monetary amounts where the decimal separator is a comma. In the **Delimiters** section, select **Delimiter Options**. Then, under **Decimal Separator**, select **, (comma)**.

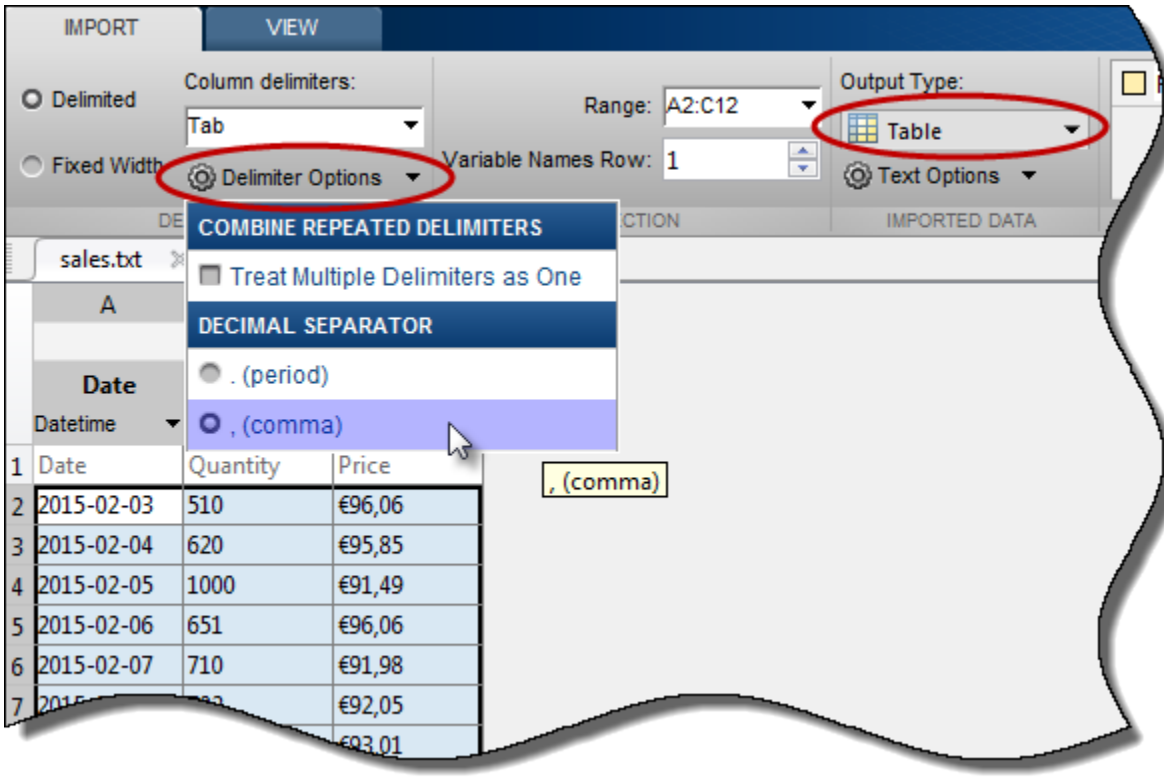

The Import Tool appropriately converts the monetary values.

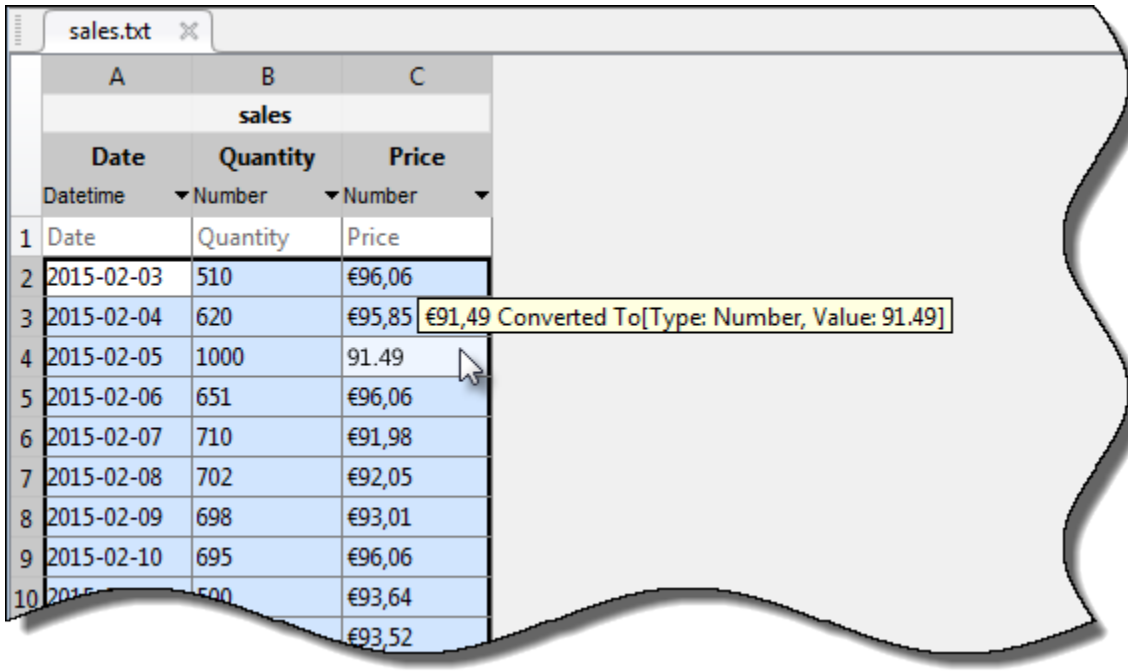

Specify that a column contains date or time data by changing the data type for the column to **DATE/TIME**. Click **more date formats...**. Scroll down the list to enter a custom date format.

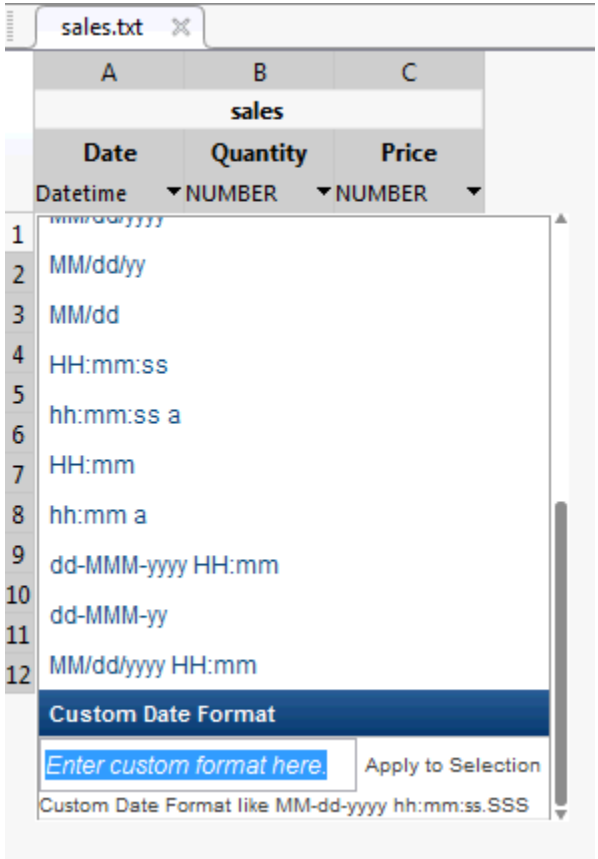

Click **Import Selection** to import the table.

- "Select Text File Data Using Import Tool"
- "Select Spreadsheet Data Using Import Tool"

Programmatic Use

```
uiimport
```

Limitations

- On Linux platforms, **Import Tool** cannot open spreadsheet files written by the `writetable` function.

See Also

See Also

Functions

`csvread` | `dlmread` | `importdata` | `readtable` | `textscan` | `xlsread`

Topics

"Select Text File Data Using Import Tool"
"Select Spreadsheet Data Using Import Tool"

imread

Read image from graphics file

Syntax

```
A = imread(filename)
A = imread(filename,fmt)
A = imread( ___ ,idx)
A = imread( ___ ,Name,Value)
[A,map] = imread( ___ )
[A,map,transparency] = imread( ___ )
```

Description

`A = imread(filename)` reads the image from the file specified by `filename`, inferring the format of the file from its contents. If `filename` is a multi-image file, then `imread` reads the first image in the file.

`A = imread(filename,fmt)` additionally specifies the format of the file with the standard file extension indicated by `fmt`. If `imread` cannot find a file with the name specified by `filename`, it looks for a file named *`filename.fmt`*.

`A = imread( ___ ,idx)` reads the specified image or images from a multi-image file. This syntax applies only to GIF, CUR, ICO, and HDF4 files. You must specify a `filename` input, and you can optionally specify `fmt`.

`A = imread( ___ ,Name,Value)` specifies format-specific options using one or more name-value pair arguments, in addition to any of the input arguments in the previous syntaxes.

`[A,map] = imread( ___ )` reads the indexed image in `filename` into `A` and reads its associated colormap into `map`. Colormap values in the image file are automatically rescaled into the range `[0,1]`.

`[A,map,transparency] = imread( ___ )` additionally returns the image transparency. This syntax applies only to PNG, CUR, and ICO files. For PNG files, `transparency` is the alpha channel, if one is present. For CUR and ICO files, it is the AND (opacity) mask.

Examples

Read and Display Image

Read a sample image.

```
A = imread('ngc6543a.jpg');
```

`imread` returns a 650-by-600-by-3 array, `A`.

Display the image.

```
image(A)
```

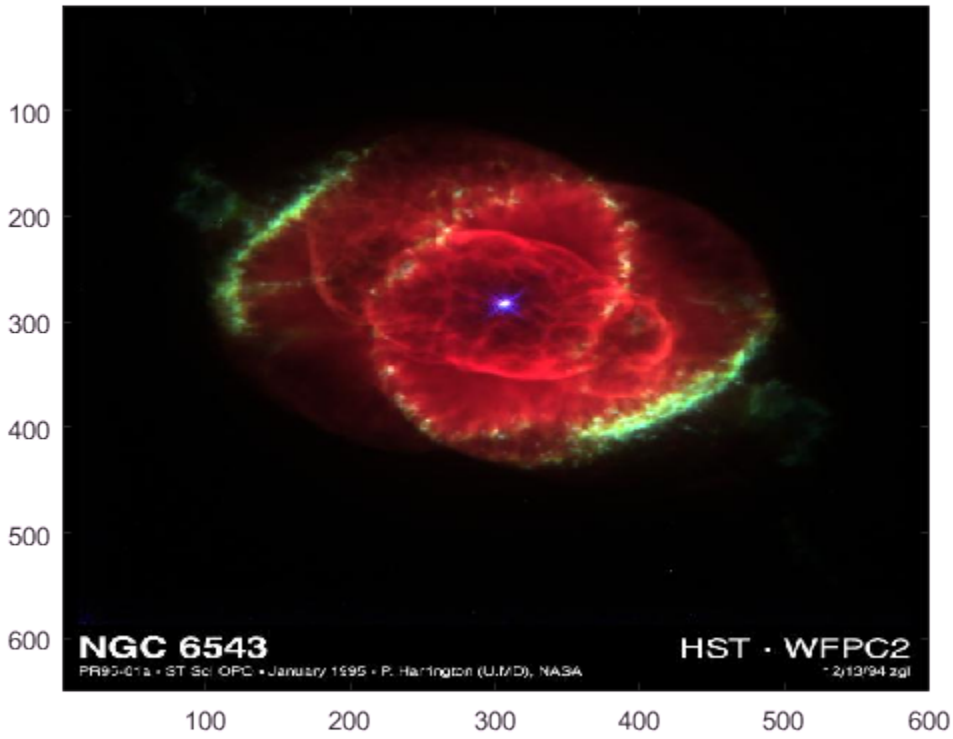

Convert Indexed Image to RGB

Read an image and convert it to an RGB image.

Read the first image in the sample indexed image file, `corn.tif`.

```
[X,map] = imread('corn.tif');
```

`X` is a 415-by-312 array of type `uint8`.

Verify that the colormap, `map`, is not empty, and convert the data in `X` to RGB.

```
if ~isempty(map)
    Im = ind2rgb(X,map);
end
```

View the size and class of `X`.

```
whos Im
```

```
  Name         Size                   Bytes  Class     Attributes

  Im         415x312x3              3107520  double
```

`X` is now a 415-by-312-by-3 array of type `double`.

Read Specific Image in Multipage TIFF File

Read the third image in the sample file, `corn.tif`.

```
[X,map] = imread('corn.tif',3);
```

Return Alpha Channel of PNG Image

Return the alpha channel of the sample image, `peppers.png`.

```
[X,map,alpha] = imread('peppers.png');
alpha
```

```
alpha =

     []
```

No alpha channel is present, so `alpha` is empty.

Read Specified Region of TIFF Image

Read a specific region of pixels of the sample image, `corn.tif`.

Specify the `'PixelRegion'` parameter with a cell array of vectors indicating the boundaries of the region to read. The first vector specifies the range of rows to read, and the second vector specifies the range of columns to read.

```
A = imread('corn.tif','PixelRegion',{[1,2],[2,5]});
```

`imread` reads the image data in rows 1-2 and columns 2-5 from `corn.tif` and returns the 2-by-4 array, `A`.

Input Arguments

`filename` — File name
character vector

File name, specified as a character vector. If the file is not in the current folder or in a folder on the MATLAB path, specify the full path name.

`filename` also can be an internet URL specifying an image location. The URL must include the protocol type (for example, `http://`).

For information on the bit depths, compression schemes, and color spaces supported for each file type, see "Algorithms" on page 1-5602.

Example: `'myFile.jpg'`

Example: `'http://www.mathworks.com/myImage.gif'`

Data Types: `char`

`fmt` — Image format
character vector

Image format, specified as a character vector indicating the standard file extension. Call `imformats` to see a list of supported formats and their file extensions.

Example: `'png'`

Data Types: `char`

`idx` — Image to read
integer scalar | vector of integers

Image to read, specified as an integer scalar or, for GIF files, a vector of integers. For example, if `idx` is 3, then `imread` returns the third image in the file. For a GIF file, if `idx` is `1:5`, then `imread` returns only the first five frames. The `idx` argument is supported only for multi-image GIF, CUR, ICO, and HDF4 files.

When reading multiple frames from the same GIF file, specify `idx` as a vector of frames or use the `'Frames','all'` name-value pair argument. Because of the way that GIF files are structured, these syntaxes provide faster performance compared to calling `imread` in a loop.

For HDF4 files, `idx` corresponds to the reference number of the image to read. Reference numbers do not necessarily correspond to the order of the images in the file. You can use `imfinfo` to match image order with reference number.

Example: `3`

Data Types: `double`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Index',5` reads the fifth image of a TIFF file.

GIF Files

`'Frames'` — Frame to read
1 (default) | positive integer | vector of integers | `'all'`

Frames to read, specified as the comma-separated pair consisting of `'Frames'` and a positive integer, a vector of integers, or `'all'`. For example, if you specify the value 3,

`imread` reads the third frame in the file. If you specify `'all'`, then `imread` reads all frames and returns them in the order in which they appear in the file.

Example: `'frames',5`

JPEG 2000 Files

`'PixelRegion'` — Subimage to read

cell array in the form `{rows,cols}`

Subimage to read, specified as the comma-separated pair consisting of `'PixelRegion'` and a cell array of the form `{rows,cols}`. The `rows` input specifies the range of rows to read. The `cols` input specifies the range of columns to read. Both `rows` and `cols` must be two-element vectors containing 1-based indices. For example, `'PixelRegion',{[1 2],[3 4]}` reads the subimage bounded by rows 1 and 2 and columns 3 and 4 in the image data. If the `'ReductionLevel'` value is greater than 0, then `rows` and `cols` are coordinates of the subimage.

Example: `'PixelRegion',{[1 100],[4 500]}`

`'ReductionLevel'` — Reduction of image resolution

0 (default) | nonnegative integer

Reduction of the image resolution, specified as the comma-separated pair consisting of `'ReductionLevel'` and a nonnegative integer. For reduction level L, the image resolution is reduced by a factor of 2^L. The reduction level is limited by the total number of decomposition levels as specified by the `'WaveletDecompositionLevels'` field in the output of the `imfinfo` function.

Example: `'ReductionLevel',5`

Data Types: `single` | `double`

`'V79Compatible'` — Compatibility with MATLAB 7.9 (R2009b) and earlier

`false` (default) | `true`

Compatibility with MATLAB 7.9 (R2009b) and earlier, specified as the comma-separated pair consisting of `'V79Compatible'` and either `true` or `false`. If you specify `true`, then the returned grayscale or RGB image is consistent with previous versions of `imread` (MATLAB 7.9 (R2009b) and earlier).

Example: `'V79Compatible',true`

Data Types: `logical`

PNG Files

`'BackgroundColor'` — Background color

`'none'` | integer | 3-element vector of integers

Background color, specified as `'none'`, an integer, or a three-element vector of integers. If `BackgroundColor` is `'none'`, then `imread` does not perform any compositing. Otherwise, `imread` blends transparent pixels with the background color.

- If the input image is indexed, then the value of `BackgroundColor` must be an integer in the range `[1,P]`, where `P` is the colormap length.
- If the input image is grayscale, then the value of `BackgroundColor` must be an integer in the range `[0,1]`.
- If the input image is RGB, then the value of `BackgroundColor` must be a three-element vector with values in the range `[0,1]`.

The default value for `BackgroundColor` depends on the presence of the `transparency` output argument and the image type:

- If you request the `transparency` output argument, then the default value of `BackgroundColor` is `'none'`.
- If you do not request the `transparency` output and the PNG file contains a background color chunk, then that color is the default value for `BackgroundColor`.
- If you do not request the `transparency` output and the file does not contain a background color chunk, then the default value for `BackgroundColor` is `1` for indexed images, `0` for grayscale images, and `[0 0 0]` for truecolor (RGB) images.

TIFF Files

`'Index'` — Image to read

1 (default) | positive integer

Image to read, specified as the comma-separated pair consisting of `'Index'` and a positive integer. For example, if the value of `Index` is 3, then `imread` reads the third image in the file.

Data Types: `single` | `double`

`'Info'` — Information about image

structure array

Information about the image, specified as the comma-separated pair consisting of `'Info'` and a structure array returned by the `imfinfo` function. Use the `Info` name-value pair argument to help `imread` locate the images in a multi-image TIFF file more quickly.

Data Types: `struct`

`'PixelRegion'` — Region boundary

cell array

Region boundary, specified as the comma-separated pair consisting of `'PixelRegion'` and a cell array of the form `{rows,cols}`. The `rows` input specifies the range of rows to read. The `cols` input specifies the range of columns to read. `rows` and `cols` must be either two-element or three-element vectors of 1-based indices. A two-element vector specifies the first and last rows or columns to read. For example, `'PixelRegion',{[1 2],[3 4]}` reads the region bounded by rows 1 and 2 and columns 3 and 4 in the image data.

A three-element vector must be in the form `[start increment stop]`, where `start` is the first row or column to read, `increment` is an incremental value, and `stop` is the last row or column to read. This syntax allows image downsampling. For example, `'PixelRegion',{[1 2 10],[4 3 12]}` reads the region bounded by rows 1 and 10 and columns 4 and 12, and samples data from every 2 pixels in the vertical direction, and every 3 pixels in the horizontal direction.

Example: `'PixelRegion',{[1 100],[4 500]}`

Data Types: `cell`

Output Arguments

A — Image data

array

Image data, returned as an array.

- If the file contains a grayscale image, then A is an `m`-by-`n` array.
- If the file contains an indexed image, then A is an `m`-by-`n` array of index values corresponding to the color at that index in `map`.
- If the file contains a truecolor image, then A is an `m`-by-`n`-by-3 array.

- If the file is a TIFF file containing color images that use the CMYK color space, then A is an m-by-n-by-4 array.

The class of A depends on the image format and the bit depth of the image data. For more information, see "Algorithms" on page 1-5602

map — Colormap
m-by-3 matrix

Colormap associated with the indexed image data in A, returned as an m-by-3 matrix of class double.

transparency — Transparency information
matrix

Transparency information, returned as a matrix. For PNG files, transparency is the alpha channel, if present. If no alpha channel is present, or if you specify the 'BackgroundColor' name-value pair argument, then transparency is []. For CUR and ICO files, transparency is the AND mask. For cursor files, this mask sometimes contains the only useful data.

Definitions

Bit Depth

Bit depth is the number of bits used to represent each image pixel.

Bit depth is calculated by multiplying the bits-per-sample with the samples-per-pixel. Thus, a format that uses 8 bits for each color component (or sample) and three samples per pixel has a bit depth of 24. Sometimes the sample size associated with a bit depth can be ambiguous. For example, does a 48-bit bit depth represent six 8-bit samples, four 12-bit samples, or three 16-bit samples? See "Algorithms" on page 1-5602 for sample size information to avoid this ambiguity.

Algorithms

For most image file formats, imread uses 8 or fewer bits per color plane to store image pixels. This table lists the class of the returned image array, A, for the bit depths used by the file formats.

Bit Depth in File	Class of Array Returned by `imread`
1 bit per pixel	`logical`
2 to 8 bits per color plane	`uint8`
9 to 16 bits per pixel	`uint16` (`BMP`, `JPEG`, `PNG`, and `TIFF`) For the 16-bit BMP packed format (5-6-5), MATLAB returns `uint8`

The following sections provide information about the support for specific formats, listed in alphabetical order by format name.

"BMP — Windows Bitmap" on page 1-5603	"JPEG — Joint Photographic Experts Group" on page 1-5605	"PNG — Portable Network Graphics" on page 1-5606
"CUR — Cursor File" on page 1-5604	"JPEG 2000 — Joint Photographic Experts Group 2000" on page 1-5605	"PPM — Portable Pixmap" on page 1-5607
"GIF — Graphics Interchange Format" on page 1-5604	"PBM — Portable Bitmap" on page 1-5606	"RAS — Sun Raster" on page 1-5607
"HDF4 — Hierarchical Data Format" on page 1-5604	"PCX — Windows Paintbrush" on page 1-5606	"TIFF — Tagged Image File Format" on page 1-5607
"ICO — Icon File" on page 1-5605	"PGM — Portable Graymap" on page 1-5606	"XWD — X Window Dump" on page 1-5608

BMP — Windows Bitmap

This table lists supported bit depths and the data type of the output image data array.

Supported Bit Depths	No Compression	RLE Compression	Output Class	Notes
1 bit	✓	–	`logical`	
4 bit	✓	✓	`uint8`	
8 bit	✓	✓	`uint8`	

Supported Bit Depths	No Compression	RLE Compression	Output Class	Notes
16 bit	✓	–	`uint8`	1 sample/pixel
24 bit	✓	–	`uint8`	3 samples/pixel
32 bit	✓	–	`uint8`	3 samples/pixel (1 byte padding)

CUR — Cursor File

This table lists supported bit depths and the data type of the output image data array.

Supported Bit Depths	No Compression	Compression	Output Class
1 bit	✓	–	`logical`
4 bit	✓	–	`uint8`
8 bit	✓	–	`uint8`

Note By default, Microsoft Windows cursors are 32-by-32 pixels. Since MATLAB pointers must be 16-by-16, you might need to scale your image. If you have Image Processing Toolbox™, you can use the `imresize` function.

GIF — Graphics Interchange Format

This table lists supported bit depths and the data type of the output image data array.

Supported Bit Depths	No Compression	Compression	Output Class
1 bit	✓	–	`logical`
2 bit to 8 bit	✓	–	`uint8`

HDF4 — Hierarchical Data Format

This table lists supported bit depths and the data type of the output image data array.

Supported Bit Depths	Raster Image with colormap	Raster image without colormap	Output Class	Notes
8 bit	✓	✓	`uint8`	

Supported Bit Depths	Raster Image with colormap	Raster image without colormap	Output Class	Notes
24 bit	–	✓	`uint8`	3 samples/pixel

ICO — Icon File

See "CUR — Cursor File" on page 1-5604

JPEG — Joint Photographic Experts Group

`imread` reads any baseline JPEG image, as well as JPEG images with some commonly used extensions. For information on JPEG 2000 file support, see JPEG 2000.

Supported Bits per Sample	Lossy Compression	Lossless Compression	Output Class	Notes
8 bit	✓	✓	`uint8`	Grayscale or RGB
12 bit	✓	✓	`uint16`	Grayscale or RGB
16 bit	–	✓	`uint16`	Grayscale

JPEG 2000 — Joint Photographic Experts Group 2000

For information about JPEG files, see JPEG.

Note: Indexed JPEG 2000 images are not supported. Only JP2 compatible color spaces are supported for JP2/JPX files. By default, all image channels are returned in the order they are stored in the file.

Supported Bits per Sample	Lossy Compression	Lossless Compression	Output Class	Notes
1 bit	✓	✓	`logical`	Grayscale only
2 bit to 8 bit	✓	✓	`uint8` or `int8`	Grayscale or RGB
9 bit to 16 bit	✓	✓	`uint16` or `int16`	Grayscale or RGB

PBM — Portable Bitmap

This table lists supported bit depths and the data type of the output image data array.

Supported Bit Depths	Raw Binary	ASCII (Plain) Encoded	Output Class
1 bit	✓	✓	`logical`

PCX — Windows Paintbrush

This table lists supported bit depths and the data type of the output image data array.

Supported Bit Depths	Output Class	Notes
1 bit	`logical`	Grayscale only
8 bit	`uint8`	Grayscale or indexed
24 bit	`uint8`	RGB Three 8-bit samples/pixel

PGM — Portable Graymap

This table lists supported bit depths and the data type of the output image data array.

Supported Bit Depths	Raw Binary	ASCII (Plain) Encoded	Output Class	Notes
8 bit	✓	–	`uint8`	
16 bit	✓	–	`uint16`	
Arbitrary	–	✓	1-bit to 8-bit: `uint8` 9-bit to 16-bit: `uint16`	Values are scaled

PNG — Portable Network Graphics

This table lists supported bit depths and the data type of the output image data array.

Supported Bit Depths	Output Class	Notes
1 bit	`logical`	Grayscale
2 bit	`uint8`	Grayscale

Supported Bit Depths	Output Class	Notes
4 bit	`uint8`	Grayscale
8 bit	`uint8`	Grayscale or Indexed
16 bit	`uint16`	Grayscale or Indexed
24 bit	`uint8`	RGB Three 8-bit samples/pixel.
48 bit	`uint16`	RGB Three 16-bit samples/pixel.

PPM — Portable Pixmap

This table lists supported bit depths and the data type of the output image data array.

Supported Bit Depths	Raw Binary	ASCII (Plain) Encoded	Output Class
Up to 16 bit	✓	–	`uint8`
Arbitrary	–	✓	

RAS — Sun Raster

This table lists supported bit depths and the data type of the output image data array.

Supported Bit Depths	Output Class	Notes
1 bit	`logical`	Bitmap
8 bit	`uint8`	Indexed
24 bit	`uint8`	RGB Three 8-bit samples/pixel
32 bit	`uint8`	RGB with Alpha Four 8-bit samples/pixel

TIFF — Tagged Image File Format

`imread` reads most images supported by the TIFF specification or LibTIFF. The `imread` function supports these TIFF capabilities:

- Any number of samples per pixel

- CCITT group 3 and 4 FAX, Packbits, JPEG, LZW, Deflate, ThunderScan compression, and uncompressed images
- Logical, grayscale, indexed color, truecolor and hyperspectral images
- RGB, CMYK, CIELAB, ICCLAB color spaces. If the color image uses the CMYK color space, `A` is an `m`-by-`n`-by-4 array. To determine which color space is used, use `imfinfo` to get information about the graphics file and look at the value of the `PhotometricInterpretation` field. If a file contains CIELAB color data, `imread` converts it to ICCLAB before bringing it into the MATLAB workspace. This conversion is necessary because 8-bit or 16-bit TIFF CIELAB-encoded values use a mixture of signed and unsigned data types that cannot be represented as a single MATLAB array.
- Data organized into tiles or scanlines

`imread` reads and converts TIFF images as follows:

- YCbCr images are converted into the RGB colorspace.
- All grayscale images are read as if black = `0`, white = largest value.
- 1-bit images are returned as class `logical`.
- CIELab images are converted into ICCLab colorspace.

For copyright information, open the `libtiffcopyright.txt` file.

XWD — X Window Dump

This table lists the supported bit depths, compression, and output classes for XWD files.

Supported Bit Depths	ZPixmaps	XYBitmaps	XYPixmaps	Output Class
1 bit	✓	–	✓	`logical`
8 bit	✓	–	–	`uint8`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Supports reading of 8-bit JPEG images only. The input argument `filename` must be a valid absolute path or relative path.
- This function generates code that uses a precompiled, platform-specific shared library (Image Processing Toolbox).
- In a MATLAB Function block, the input argument `filename` must be a compile-time constant.

See Also

See Also

`fread` | `image` | `imfinfo` | `imformats` | `imwrite` | `ind2rgb`

Topics

"Importing Images"

Introduced before R2006a

imshow

Display image

Syntax

```
imshow(I)
imshow(X,map)
imshow(filename)
imshow(I,[low high])
imshow(___,Name,Value)

himage = imshow( ___ )
```

Description

`imshow(I)` displays image `I` in a figure, where `I` is a grayscale, RGB (truecolor), or binary image. For binary images, `imshow` displays pixels with the value `0` (zero) as black and `1` as white. `imshow` optimizes figure, axes, and image object properties for image display.

`imshow(X,map)` displays the indexed image `X` with the colormap `map`. A colormap matrix can have any number of rows, but it must have exactly 3 columns. Each row is interpreted as a color, with the first element specifying the intensity of red light, the second green, and the third blue. Color intensity can be specified on the interval 0.0 to 1.0.

`imshow(filename)` displays the image stored in the graphics file specified by `filename`.

`imshow(I,[low high])` displays grayscale image `I`, specifying the display range as a two-element vector, `[low high]`. For more information, see the `DisplayRange` parameter.

`imshow(___,Name,Value)` displays an image, using name-value pairs to control aspects of the operation.

`himage = imshow( ___ )` returns the image object created by `imshow`.

Examples

Display Grayscale Image

Display a grayscale image by reading an RGB image into the workspace and converting it to a grayscale image.

Read RGB image into the workspace.

```
RGB = imread('peppers.png');
```

Convert the image to grayscale.

```
I = rgb2gray(RGB);
```

Display the grayscale image.

```
imshow(I)
```

Display Image from File

Display an image stored in a file.

```
imshow('peppers.png');
```

Display Indexed Image

Read a sample indexed image, `corn.tif`, into the workspace, and then display it.

```
[X,map] = imread('corn.tif');
imshow(X,map)
```

Change Colormap of Displayed Image

Read a sample indexed image, `corn.tif`, into the workspace, and then display it.

```
[X,map] = imread('corn.tif');
imshow(X,map)
```

Change the colormap for the image using the `colormap` function and specifying the target axes as the first input argument. Use the original colormap without the red component.

```
newmap = map;
newmap(:,1) = 0;
colormap(gca,newmap)
```

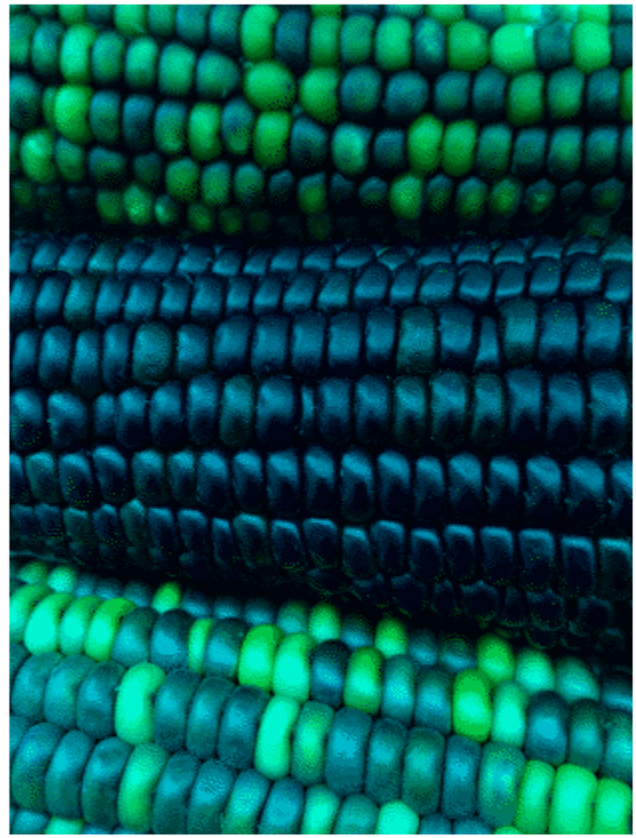

Input Arguments

`I` — Input image

scalar | vector | matrix | `m`-by-`n`-by-3 array

Input image, specified as a scalar, vector, or matrix representing a grayscale, RGB, or binary image. Multi-plane image inputs must be RGB images of size `m`-by-`n`-by-3. An RGB image can be `uint8`, `uint16`, `single`, or `double`. A grayscale image can be any numeric data type. A binary image is of class `logical`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`X` — Indexed image

2-D array of real numeric values

Indexed image, specified as a 2-D array of real numeric values. The values in `X` are indices into the colormap specified by `map`.

Data Types: `single` | `double` | `uint8` | `logical`

`map` — Colormap

m-by-3 array

Colormap, specified as an *m*-by-3 array of type `single` or `double` in the range `[0 1]`, or an *m*-by-3 array of type `uint8`. Each row specifies an RGB color value.

Data Types: `single` | `double` | `uint8`

`filename` — File name

character vector

File name, specified as a character vector. The image must be readable by `imread`. The `imshow` function displays the image, but does not store the image data in the MATLAB workspace. If the file contains multiple images, `imshow` displays the first image in the file.

Example: `imshow('peppers.png')`

Data Types: `char`

`[low high]` — Grayscale image display range

two-element vector

Grayscale image display range, specified as a two-element vector. For more information, see the `'DisplayRange'` name-value pair argument.

Example: `[50 250]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `imshow('board.tif','Border','tight')`

`'Border'` — Figure window border space

`'loose'` (default) | `'tight'`

Figure window border space, specified as the comma-separated pair consisting of `'Border'` and either `'tight'` or `'loose'`. When set to `'loose'`, the figure window includes space around the image in the figure. When set to `'tight'`, the figure window does not include any space around the image in the figure.

If the image is very small or if the figure contains other objects besides an image and its axes, `imshow` might use a border regardless of how this parameter is set.

Example: `imshow('board.tif','Border','tight')`

Data Types: `char`

`'Colormap'` — Colormap

`m`-by-3 matrix

Colormap, specified as the comma-separated pair consisting of `'Colormap'` and an `m`-by-3 matrix. `imshow` uses this to set the colormap for the axes. Use this parameter to view grayscale images in false color. If you specify an empty colormap (`[]`), then `imshow` ignores this parameter.

Note: Starting in R2016b, `imshow` changes the colormap for the axes that contains the image instead of the figure.

Example: `newmap = copper; imshow('board.tif','Colormap',newmap)`

Data Types: `double`

`'DisplayRange'` — Grayscale image display range

two-element vector

Display range of a grayscale image, specified as a two-element vector of the form `[low high]`. The `imshow` function displays the value `low` (and any value less than `low`) as black, and it displays the value `high` (and any value greater than `high`) as white. Values between `low` and `high` are displayed as intermediate shades of gray, using the default number of gray levels. If you specify an empty matrix (`[]`), `imshow` uses `[min(I(:)) max(I(:))]`. In other words, use the minimum value in `I` as black, and the maximum value as white.

Note: Including the parameter name is optional, except when the image is specified by a file name. The syntax `imshow(I,[low high])` is equivalent to `imshow(I,'DisplayRange',[low high])`. If you call `imshow` with a file name, then you must specify the `'DisplayRange'` parameter.

Example: `h = imshow(I,'DisplayRange',[0 80]);`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'InitialMagnification'` — Initial magnification of image display

100 (default) | numeric scalar | `'fit'`

Initial magnification of image display, specified as the comma-separated pair consisting of `'InitialMagnification'` and a numeric scalar or `'fit'`. If set to 100, then `imshow` displays the image at 100% magnification (one screen pixel for each image pixel). If set to `'fit'`, then `imshow` scales the entire image to fit in the window.

Initially, `imshow` always displays the entire image. If the magnification value is so large that the image is too big to display on the screen, `imshow` warns and displays the image at the largest magnification that fits on the screen.

If the image is displayed in a figure with its `'WindowStyle'` property set to `'docked'`, then `imshow` warns and displays the image at the largest magnification that fits in the figure.

Note: If you specify the axes position (using `subplot` or `axes`), `imshow` ignores any initial magnification you might have specified and defaults to the `'fit'` behavior.

When you use `imshow` with the `'Reduce'` parameter, the initial magnification must be `'fit'`.

Example: `h = imshow(I,'InitialMagnification','fit');`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char`

`'Parent'` — Parent axes of image object
axes object

Parent axes of image object, specified as the comma-separated pair consisting of `'Parent'` and an axes object. Use the `'Parent'` name-value argument to build a UI that gives you control of the figure and axes properties.

`'Reduce'` — Indicator for subsampling
`true` | `false` | `1` | `0`

Indicator for subsampling image, specified as the comma-separated pair consisting of `'Reduce'` and either `true`, `false`, `1`, or `0`. This argument is valid only when you use it with the name of a TIFF file. Use the `Reduce` argument to display overviews of very large images.

Data Types: `logical`

`'XData'` — X-axis limits of nondefault coordinate system
two-element vector

X-axis limits of nondefault coordinate system, specified as the comma-separated pair consisting of `'XData'` and a two-element vector. This argument establishes a nondefault spatial coordinate system by specifying the image `XData`. The value can have more than two elements, but `imshow` uses only the first and last elements.

Example: `'XData',[100 200]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'YData'` — Y-axis limits of nondefault coordinate system
two-element vector

Y-axis limits of nondefault coordinate system, specified as the comma-separated pair consisting of `'YData'` and a two-element vector. The value can have more than two elements, but `imshow` uses only the first and last elements.

Example: `'YData',[100 200]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`himage` — Image created by `imshow`
image object

Image created by `imshow`, specified as an image object.

Tips

- To change the colormap after you create the image, use the `colormap` command. Specify the axes that contains the image as the first input argument and the colormap you want as the second input argument. For an example, see "Change Colormap of Displayed Image" on page 1-5614.
- You can display multiple images with different colormaps in the same figure using `imshow` with the `subplot` function.
- If you have Image Processing Toolbox, you can use the Image Viewer app as an integrated environment for displaying images and performing common image processing tasks.
- If you have Image Processing Toolbox, you can use the `iptsetpref` function to set toolbox preferences that modify the behavior of `imshow`.
- The `imshow` function is not supported when you start MATLAB with the `-nojvm` option.

See Also

See Also
`image` | `imagesc` | `imfinfo` | `imread` | `imwrite` | `iptsetpref`

Introduced before R2006a

imwrite

Write image to graphics file

Syntax

```
imwrite(A,filename)
imwrite(A,map,filename)
```

```
imwrite( ___ ,fmt)
```

```
imwrite( ___ ,Name,Value)
```

Description

`imwrite(A,filename)` writes image data `A` to the file specified by `filename`, inferring the file format from the extension. `imwrite` creates the new file in your current folder. The bit depth of the output image depends on the data type of `A` and the file format. For most formats:

- If `A` is of data type `uint8`, then `imwrite` outputs 8-bit values.
- If `A` is of data type `uint16` and the output file format supports 16-bit data (JPEG, PNG, and TIFF), then `imwrite` outputs 16-bit values. If the output file format does not support 16-bit data, then `imwrite` returns an error.
- If `A` is a grayscale or RGB color image of data type `double` or `single`, then `imwrite` assumes that the dynamic range is [0,1] and automatically scales the data by 255 before writing it to the file as 8-bit values. If the data in `A` is `single`, convert `A` to `double` before writing to a GIF or TIFF file.
- If `A` is of data type `logical`, then `imwrite` assumes that the data is a binary image and writes it to the file with a bit depth of 1, if the format allows it. BMP, PNG, or TIFF formats accept binary images as input arrays.

If `A` contains indexed image data, you should additionally specify the `map` input argument.

`imwrite(A,map,filename)` writes the indexed image in `A` and its associated colormap, `map`, to the file specified by `filename`.

- If A is an indexed image of data type double or single, then imwrite converts the indices to zero-based indices by subtracting 1 from each element, and then writes the data as uint8. If the data in A is single, convert A to double before writing to a GIF or TIFF file.

imwrite(___ ,fmt) writes the image in the format specified by fmt, regardless of the file extension in filename. You can specify fmt after the input arguments in any of the previous syntaxes.

imwrite(___ ,Name,Value) specifies additional parameters for output GIF, HDF, JPEG, PBM, PGM, PNG, PPM, and TIFF files, using one or more name-value pair arguments. You can specify Name,Value after the input arguments in any of the previous syntaxes.

Examples

Write Grayscale Image to PNG

Write a 50-by-50 array of grayscale values to a PNG file in the current folder.

```
A = rand(50);
imwrite(A,'myGray.png')
```

Write Indexed Image Data to PNG

Write an indexed image array and its associated colormap to a PNG file.

Load sample image data from the file, clown.mat.

```
load clown.mat
```

The image array X and its associated colormap, map, are loaded into the MATLAB workspace.

Write the data to a new PNG file.

```
imwrite(X,map,'myclown.png')
```

imwrite creates the file, myclown.png, in your current folder.

View the new file by opening it outside of MATLAB.

Write Indexed Image with MATLAB Colormap

Write image data to a new PNG file with the built-in MATLAB colormap, `copper`.

Load sample image data from the file `clown.mat`.

```
load clown.mat
```

The image array `X` and its associated colormap, `map`, are loaded into the MATLAB workspace. `map` is a matrix of 81 RGB vectors.

Define a copper-tone colormap with 81 RGB vectors. Then, write the image data to a PNG file using the new colormap.

```
newmap = copper(81);
imwrite(X,newmap,'copperclown.png');
```

`imwrite` creates the file, `copperclown.png`, in your current folder.

View the new file by opening it outside of MATLAB.

Write Truecolor Image to JPEG

Create and write truecolor image data to a JPEG file.

Create a 49-by-49-by-3 array of random RGB values.

```
A = rand(49,49);
A(:,:,2) = rand(49,49);
A(:,:,3) = rand(49,49);
```

Write the image data to a JPEG file, specifying the output format using `'jpg'`. Add a comment to the file using the `'Comment'` name-value pair argument.

```
imwrite(A,'newImage.jpg','jpg','Comment','My JPEG file')
```

View information about the new file.

```
imfinfo('newImage.jpg')
```

```
ans =

           Filename: 'S:\newImage.jpg'
        FileModDate: '25-Jan-2013 16:18:41'
```

```
           FileSize: 2339
             Format: 'jpg'
      FormatVersion: ''
              Width: 49
             Height: 49
           BitDepth: 24
          ColorType: 'truecolor'
    FormatSignature: ''
    NumberOfSamples: 3
       CodingMethod: 'Huffman'
      CodingProcess: 'Sequential'
            Comment: {'My JPEG file'}
```

Write Multiple Images to TIFF File

Write multiple images to a single multipage TIFF file.

Create two sets of random image data, `im1` and `im2`.

```
im1 = rand(50,40,3);
im2 = rand(50,50,3);
```

Write the first image to a new TIFF file. Then, append the second image to the same file.

```
imwrite(im1,'myMultipageFile.tif')
imwrite(im2,'myMultipageFile.tif','WriteMode','append')
```

Write Animated GIF

Draw a series of plots, capture them as images, and write them into one animated GIF file.

Plot $y = x^n$ for $n = 3$.

```
x = 0:0.01:1;
n = 3;
y = x.^n;
plot(x,y,'LineWidth',3)
title(['y = x^n,  n = ' num2str(n) ])
```

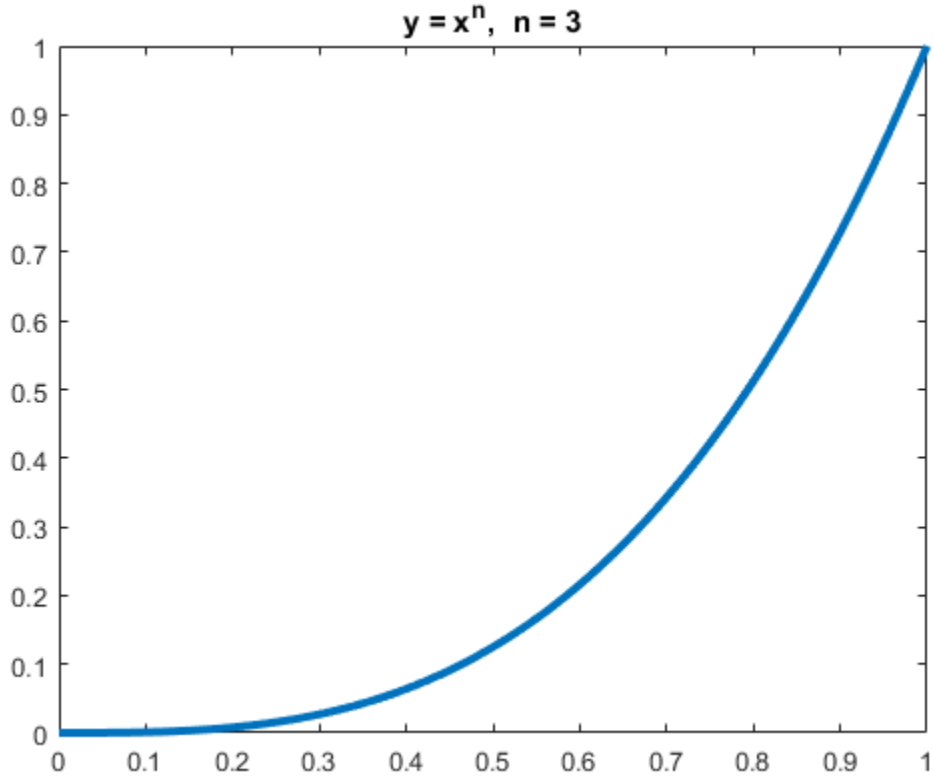

Capture a series of plots for increasing values of n.

```
n = 1:0.5:5;
nImages = length(n);

figure;
for idx = 1:nImages
    y = x.^n(idx);
    plot(x,y,'LineWidth',3)
    title(['y = x^n,  n = ' num2str( n(idx)) ])
    drawnow
    frame = getframe(1);
    im{idx} = frame2im(frame);
end
```

```
close;
```

Display the series of images in one figure.

```
figure;
for idx = 1:nImages
    subplot(3,3,idx)
    imshow(im{idx});
end
```

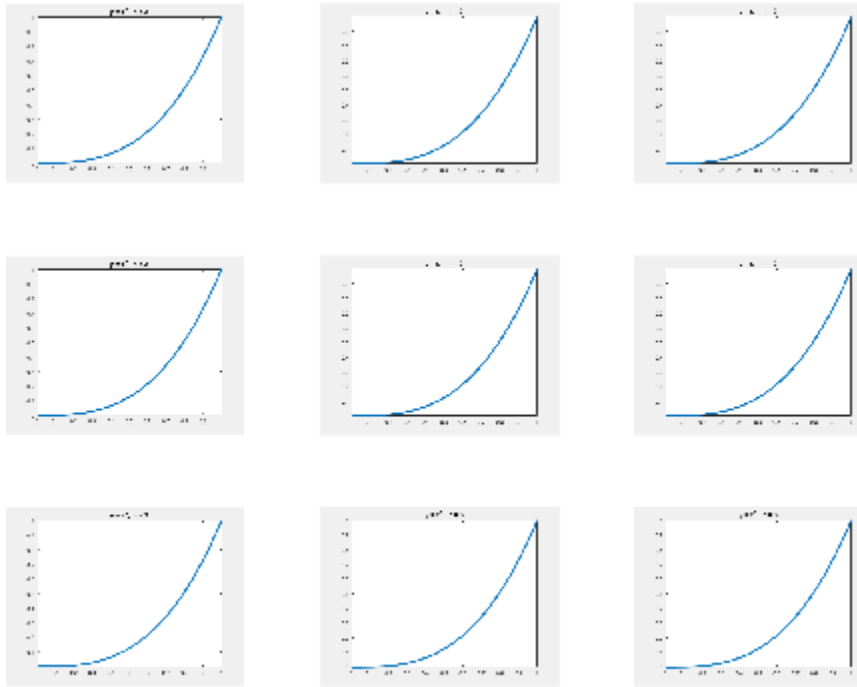

Save the nine images into a GIF file. Because three-dimensional data is not supported for GIF files, call `rgb2ind` to convert the RGB data in the image to an indexed image `A` with a colormap `map`. To append multiple images to the first image, call `imwrite` with the name-value pair argument `'WriteMode','append'`.

```
filename = 'testAnimated.gif'; % Specify the output file name
for idx = 1:nImages
    [A,map] = rgb2ind(im{idx},256);
    if idx == 1
        imwrite(A,map,filename,'gif','LoopCount',Inf,'DelayTime',1);
    else
        imwrite(A,map,filename,'gif','WriteMode','append','DelayTime',1);
    end
end
```

`imwrite` writes the GIF file to your current folder. Name-value pair `'LoopCount',Inf` causes the animation to continuously loop. `'DelayTime',1` specifies a 1-second delay between the display of each image in the animation.

Input Arguments

A — Image data to write

matrix

Image data to write, specified as a full (nonsparse) matrix.

- For grayscale images, `A` can be `m`-by-`n`.
- For indexed images, `A` can be `m`-by-`n`. Specify the associated colormap in the `map` input argument.
- For truecolor images, `A` must be `m`-by-`n`-by-3. `imwrite` does not support writing RGB images to GIF files.

For TIFF files, `A` can be an `m`-by-`n`-by-4 array containing color data that uses the CMYK color space.

For multiframe GIF files, `A` can be an `m`-by-`n`-by-1-by-`p` array containing grayscale or indexed images, where `p` is the number of frames to write. RGB images are not supported in this case.

Data Types: `double` | `single` | `uint8` | `uint16` | `logical`

`filename` — Name of output file

character vector

Name of the output file including the file extension, specified as a character vector. For a list of the image types that `imwrite` can write, see the description for the fmt input argument.

Example: `'myFile.gif'`

Data Types: `char`

`map` — Colormap of indexed image

`m`-by-3 array

Colormap associated with indexed image data in `A`, specified as an `m`-by-3 array. `map` must be a valid MATLAB colormap. See `colormap` for a list of built-in MATLAB colormaps. Most image file formats do not support colormaps with more than 256 entries.

Example: `[0,0,0;0.5,0.5,0.5;1,1,1]`

Example: `jet(60)`

Data Types: `double`

`fmt` — Format of output file

`'bmp'` | `'gif'` | `'hdf'` | `'jpg'` | `'jp2'` | ...

Format of the output file, specified as one of the formats in this table.

This table also summarizes the types of images that `imwrite` can write. The MATLAB file format registry determines which file formats are supported. See `imformats` for more information about this registry.

For certain formats, `imwrite` can accept additional name-value pair arguments. To view these arguments, click the linked format names below.

Value of `fmt`	Format of Output File	Description
`'bmp'`	Windows Bitmap (BMP)	1-bit, 8-bit, and 24-bit uncompressed images
`'gif'`	Graphics Interchange Format (GIF)	8-bit images
`'hdf'`	Hierarchical Data Format (HDF4)	8-bit raster image data sets with or without associated colormap, 24-bit raster image data sets
`'jpg'` or `'jpeg'`	Joint Photographic	8-bit, 12-bit, and 16-bit Baseline JPEG images

Value of `fmt`	Format of Output File	Description
	Experts Group (JPEG)	**Note:** `imwrite` converts indexed images to RGB before writing data to JPEG files, because the JPEG format does not support indexed images.
`'jp2'` or `'jpx'`	JPEG 2000 — Joint Photographic Experts Group 2000	1-bit, 8-bit, and 16-bit JPEG 2000 images
`'pbm'`	Portable Bitmap (PBM)	Any 1-bit PBM image, ASCII (plain) or raw (binary) encoding
`'pcx'`	Windows Paintbrush (PCX)	8-bit images
`'pgm'`	Portable Graymap (PGM)	Any standard PGM image; ASCII (plain) encoded with arbitrary color depth; raw (binary) encoded with up to 16 bits per gray value
`'png'`	Portable Network Graphics (PNG)	1-bit, 2-bit, 4-bit, 8-bit, and 16-bit grayscale images; 8-bit and 16-bit grayscale images with alpha channels; 1-bit, 2-bit, 4-bit, and 8-bit indexed images; 24-bit and 48-bit truecolor images; 24-bit and 48-bit truecolor images with alpha channels
`'pnm'`	Portable Anymap (PNM)	Any of the PPM/PGM/PBM formats, chosen automatically
`'ppm'`	Portable Pixmap (PPM)	Any standard PPM image: ASCII (plain) encoded with arbitrary color depth or raw (binary) encoded with up to 16 bits per color component
`'ras'`	Sun™ Raster (RAS)	Any RAS image, including 1-bit bitmap, 8-bit indexed, 24-bit truecolor, and 32-bit truecolor with alpha

Value of `fmt`	Format of Output File	Description
`'tif'` or `'tiff'`	Tagged Image File Format (TIFF)	Baseline TIFF images, including: • 1-bit, 8-bit, 16-bit, 24-bit, and 48-bit uncompressed images and images with packbits, LZW, or Deflate compression • 1-bit images with CCITT 1D, Group 3, and Group 4 compression • CIELAB, ICCLAB, and CMYK images
`'xwd'`	X Windows Dump (XWD)	8-bit ZPixmaps

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `imwrite(A,'myFile.png','BitDepth',8)` writes the data in `A` using 8 bits to represent each pixel.

GIF — Graphics Interchange Format

`'BackgroundColor'` — Color to use as background color
scalar integer

Color to use as background color for the indexed image, specified as the comma-separated pair consisting of `'BackgroundColor'` and a scalar integer corresponding to the colormap index.

The background color is used for some disposal methods in animated GIFs.

- If image data `A` is `uint8` or `logical`, then the colormap index is zero-based.
- If image data `A` is `double`, then the colormap index is one-based.

The default background color corresponds to the first color in the colormap.

Example: `'BackgroundColor',15`

`'Comment'` — Comment to add to image

character vector | cell array of character vectors

Comment to add to the image, specified as the comma-separated pair consisting of `'Comment'` and a character vector or a 1-by-`n` cell array of character vectors. For a cell array of character vectors, `imwrite` adds a carriage return after each character vector.

Example: `'Comment',{'Sample #314','January 5, 2013'}`

Data Types: `char` | `cell`

`'DelayTime'` — Delay before displaying next image

0.5 (default) | scalar value in the range [0,655]

Delay before displaying next image, in seconds, specified as the comma-separated pair consisting of `'DelayTime'` and a scalar value in the range [0,655]. A value of `0` displays images as fast as your hardware allows.

Example: `'DelayTime',60`

`'DisposalMethod'` — Disposal method of animated GIF

`'doNotSpecify'` (default) | `'leaveInPlace'` | `'restoreBG'` | `'restorePrevious'`

Disposal method of an animated GIF, specified as the comma-separated pair consisting of `'DisposalMethod'` and one of the methods in this table.

Value of `DisposalMethod`	Result
`'doNotSpecify'` (default)	Replace one full-size, nontransparent frame with another.
`'leaveInPlace'`	Any pixels not covered up by the next frame continue to display.
`'restoreBG'`	The background color or background tile shows through transparent pixels.
`'restorePrevious'`	Restore to the state of a previous, undisposed frame.

Example: `'DisposalMethod','restoreBG'`

`'Location'` — Offset of screen relative to image

`[0,0]` (default) | two-element vector

Offset of the screen relative to the image, measured from the top left corner of each, specified as the comma-separated pair consisting of `'Location'` and a two-element vector. The first vector element specifies the offset from the top, and the second element specifies the offset from the left, in pixels.

Example: `'Location',[10,15]`

Data Types: `double`

`'LoopCount'` — Number of times to repeat animation

`Inf` (default) | integer in the range `[0,65535]`

Number of times to repeat the animation, specified as the comma-separated pair consisting of `'LoopCount'` and either an integer in the range `[0,65535]`, or the value `Inf`. If you specify 0, the animation plays once. If you specify the value 1, the animation plays twice, and so on. A `LoopCount` value of `Inf` causes the animation to continuously loop.

To enable animation within Microsoft PowerPoint®, specify a value for `'LoopCount'` within the range [1,65535]. Some Microsoft applications interpret the value 0 to mean do not loop at all.

Example: `'LoopCount',3`

`'ScreenSize'` — Height and width of frame

height and width of input image (default) | two-element vector

Height and width of the frame, specified as the comma-separated pair consisting of `'ScreenSize'` and a two-element vector. When you use the `ScreenSize` argument with `'Location'`, it provides a way to write frames to the image that are smaller than the whole frame. `'DisposalMethod'` determines the fill value for pixels outside the frame.

Example: `'ScreenSize',[1000 1060]`

Data Types: `double`

`'TransparentColor'` — Color to use as transparent color

scalar integer

Color to use as transparent color for the image, specified as the comma-separated pair consisting of `'TransparentColor'` and a scalar integer corresponding to the colormap index.

- If image data A is `uint8` or `logical`, then indexing begins at `0`.
- If image data A is `double`, then indexing begins at `1`.

Example: `'TransparentColor',20`

`'WriteMode'` — Writing mode

`'overwrite'` (default) | `'append'`

Writing mode, specified as the comma-separated pair consisting of `'WriteMode'` and either `'overwrite'` or `'append'`. In `overwrite` mode, `imwrite` overwrites an existing file,`filename`. In `append` mode, `imwrite` adds a single frame to the existing file.

Example: `'WriteMode','append'`

HDF4 — Hierarchical Data Format

`'Compression'` — Compression scheme

`'none'` (default) | `'jpeg'` | `'rle'`

Compression scheme, specified as the comma-separated pair consisting of `'Compression'` and one of the options in this table.

Value of `Compression`	Result
`'none'` (default)	No compression
`'jpeg'`	JPEG compression. Valid only for grayscale and RGB images.
`'rle'`	Run-length encoding. Valid only for grayscale and indexed images.

Example: `'Compression','jpeg'`

`'Quality'` — Quality of JPEG-compressed file

75 (default) | scalar in the range [0,100]

Quality of the JPEG-compressed file, specified as the comma-separated pair consisting of `'Quality'` and a scalar in the range [0,100], where 0 is lower quality and higher compression, and 100 is higher quality and lower compression. This parameter applies only if `'Compression'` is `'jpeg'`.

Example: `'Quality',25`

`'WriteMode'` — Writing mode

`'overwrite'` (default) | `'append'`

Writing mode, specified as the comma-separated pair consisting of `'WriteMode'` and either `'overwrite'` or `'append'`. In `overwrite` mode, `imwrite` overwrites an existing file,`filename`. In `append` mode, `imwrite` adds a single frame to the existing file.

Example: `'WriteMode','append'`

JPEG — Joint Photographic Experts Group

`'BitDepth'` — Number of bits per pixel

8 (default) | scalar

Number of bits per pixel, specified as the comma-separated pair consisting of `'BitDepth'` and a scalar.

- For grayscale images, the `BitDepth` value can be 8, 12, or 16. The default value is 8. For 16-bit images, the `'Mode'` name-value pair argument must be `'lossless'`.
- For color images, the `BitDepth` value is the number of bits per plane, and can be 8 or 12. The default is 8 bits per plane.

Example: `'BitDepth',12`

`'Comment'` — Comment to add to image

character vector | character array | `n`-by-1 cell array of character vectors

Comment to add to the image, specified as the comma-separated pair consisting of `'Comment'` and a character vector, a character array, or an `n`-by-1 cell array of character vectors. `imwrite` writes each row of input as a comment in the JPEG file.

Example: `'Comment',{'First line';'second line';'third line'}`

Data Types: `char` | `cell`

`'Mode'` — Type of compression

`'lossy'` (default) | `'lossless'`

Type of compression, specified as the comma-separated pair consisting of `'Mode'` and one of these options:

- `'lossy'`
- `'lossless'`

Example: `'Mode','lossless'`

`'Quality'` — Quality of output file

75 (default) | scalar in the range [0,100]

Quality of the output file, specified as the comma-separated pair consisting of `'Quality'` and a scalar in the range [0,100], where 0 is lower quality and higher compression, and 100 is higher quality and lower compression. A `Quality` value of 100 does not write a lossless JPEG image. Instead, use the `'Mode','lossless'` name-value pair argument.

Example: `'Quality',100`

JPEG 2000— Joint Photographic Experts Group 2000

`'Comment'` — Comment to add to image

character vector | character array | cell array of character vectors

Comment to add to the image, specified as the comma-separated pair consisting of `'Comment'` and a character vector, a character array, or a cell array of character vectors. `imwrite` writes each row of input as a comment in the JPEG 2000 file.

Example: `'Comment',{'First line';'second line';'third line'}`

Example: `'Comment',{'First line','second line','third line'}`

Data Types: `cell` | `char`

`'CompressionRatio'` — Target compression ratio

1 (default) | scalar

Target compression ratio, specified as the comma-separated pair consisting of `'CompressionRatio'` and a real scalar greater than or equal to 1. The compression ratio is the ratio of the input image size to the output compressed size. For example, a value of 2.0 implies that the output image size is half of the input image size or less. A higher value implies a smaller file size and reduced image quality. The compression ratio does not take into account the header size.

Specifying `CompressionRatio` is valid only when `'Mode'` is `'lossy'`.

Example: `'CompressionRatio',3`

`'Mode'` — Type of compression

`'lossy'` (default) | `'lossless'`

Type of compression, specified as the comma-separated pair consisting of `'Mode'` and one of these options:

- `'lossy'`
- `'lossless'`

Example: `'Mode','lossless'`

`'ProgressionOrder'` — Order of packets in code stream
`'LRCP'` (default) | `'RLCP'` | `'RPCL'` | `'PCRL'` | `'CPRL'`

Order of packets in the code stream, specified as the comma-separated pair consisting of `'ProgressionOrder'` and one of these options:

- `'LRCP'`
- `'RLCP'`
- `'RPCL'`
- `'PCRL'`
- `'CPRL'`

The characters represent the following: `L` = layer, `R` = resolution, `C` = component and `P` = position.

Example: `'ProgressionOrder','RLCP'`

`'QualityLayers'` — Number of quality layers
1 (default) | integer in the range [1,20]

Number of quality layers, specified as the comma-separated pair consisting of `'QualityLayers'` and an integer in the range [1,20].

Example: `'QualityLayers',8`

`'ReductionLevels'` — Number of reduction levels
4 (default) | integer in the range [1,8]

Number of reduction levels, or wavelet decomposition levels, specified as the comma-separated pair consisting of `'ReductionLevels'` and an integer in the range [1,8].

Example: `'ReductionLevels',6`

`'TileSize'` — Tile height and width
image size (default) | two-element vector

Tile height and width, specified as the comma-separated pair consisting of `'TileSize'` and a two-element vector. The minimum size you can specify is `[128 128]`.

Example: `'TileSize',[130 130]`

PBM-, PGM-, and PPM — Portable Bitmap, Graymap, Pixmap

`'Encoding'` — Encoding

`'rawbits'` (default) | `'ASCII'`

Encoding, specified as the comma-separated pair consisting of `'Encoding'` and either `'rawbits'` for binary encoding, or `'ASCII'` for plain encoding.

Example: `'Encoding','ASCII'`

`'MaxValue'` — Maximum gray or color value

scalar

Maximum gray or color value, specified as the comma-separated pair consisting of `'MaxValue'` and a scalar.

Available only for PGM and PPM files. For PBM files, this value is always 1.

If the image array is `uint16`, then the default value for `MaxValue` is `65535`. Otherwise, the default value is `255`.

Example: `'MaxValue',510`

PNG — Portable Network Graphics

In addition to the following name-value pair arguments, you can use any parameter name that satisfies the PNG specification for keywords. That is, the name uses only printable characters, contains 80 or fewer characters, and does not contain leading or trailing spaces. The value corresponding to these user-specified names must be a character vector that contains no control characters other than linefeed.

`'Alpha'` — Transparency of each pixel

matrix of values in the range [0,1]

Transparency of each pixel, specified as the comma-separated pair consisting of `'Alpha'` and a matrix of values in the range [0,1]. The row and column dimensions of the `Alpha` matrix must be the same as those of the image data array. You can specify `Alpha` only for grayscale (`m`-by-`n`) and truecolor (`m`-by-`n`-by-3) image data.

Note: You cannot specify both `'Alpha'` and `'Transparency'` at the same time.

Data Types: `double` | `uint8` | `uint16`

`'Author'` — Author information

character vector

Author information, specified as the comma-separated pair consisting of `'Author'` and a character vector.

Example: `"Author','Ann Smith'`

Data Types: `char`

`'Background'` — Background color when compositing transparent pixels

scalar in the range `[0,1]` | integer in the range `[1,P]` | 3-element vector in the range `[0,1]`

Background color when compositing transparent pixels, specified as the comma-separated pair consisting of `'Background'` and a value dependent on the image data, as follows.

Image Type	Form of `Background` Value
Grayscale images	Scalar in the range `[0,1]`.
Indexed images	Integer in the range `[1,P]`, where `P` is the colormap length. For example, `'Background',50` sets the background color to the color specified by the 50th index in the colormap.
Truecolor images	Three-element vector of RGB intensities in the range `[0,1]`. For example, `'Background',[0 1 1]` sets the background color to cyan.

Data Types: `double`

`'BitDepth'` — Number of bits per pixel

scalar

Number of bits per pixel, specified as the comma-separated pair consisting of `'BitDepth'` and a scalar. Depending on the output image, the scalar can be one of the following values.

Image Type	Allowed Values for `BitDepth`
Grayscale images	1, 2, 4, 8, or 16
Grayscale images with an alpha channel	8 or 16
Indexed images	1, 2, 4, or 8
Truecolor images	8 or 16

- If the image is of class `double` or `uint8`, then the default bit depth is 8 bits per pixel.
- If the image is `uint16`, then the default is 16 bits per pixel.
- If the image is `logical`, then the default is 1 bit per pixel.

Example: `'BitDepth',4`

`'Chromaticities'` — Reference white point and primary chromaticities

8-element vector

Reference white point and primary chromaticities, specified as the comma-separated pair consisting of `'Chromaticities'` and an 8-element vector, `[wx wy rx ry gx gy bx by]`. The elements `wx` and `wy` are the chromaticity coordinates of the white point, and the elements `rx`, `ry`, `gx`, `gy`, `bx`, and `by` are the chromaticity coordinates of the three primary colors.

If you specify `Chromaticities`, you should also specify the `Gamma` name-value pair argument.

Example: `'Chromaticities', [0.312,0.329,0.002,0.002,0.001,0.001,0.115,0.312]`

Data Types: `double`

`'Comment'` — Comment to add to image

character vector

Comment to add to the image, specified as the comma-separated pair consisting of `'Comment'` and a character vector.

`'Copyright'` — Copyright notice
character vector

Copyright notice, specified as the comma-separated pair consisting of `'Copyright'` and a character vector.

`'CreationTime'` — Time of original image creation
character vector

Time of original image creation, specified as a character vector.

`'Description'` — Description of image
character vector

Description of the image, specified as the comma-separated pair consisting of `'Description'` and a character vector.

`'Disclaimer'` — Legal disclaimer
character vector

Legal disclaimer, specified as the comma-separated pair consisting of `'Disclaimer'` and a character vector.

`'Gamma'` — File gamma
scalar

File gamma, specified as the comma-separated pair consisting of `'Gamma'` and a scalar.

Example: `'Gamma',2.2`

`'ImageModTime'` — Time of last image modification
serial date number | character vector of a date

Time of the last image modification, specified as the comma-separated pair consisting of `'ImageModTime'` and a MATLAB serial date number or a character vector of a date that can be converted to a date vector using the `datevec` function. Values should be in Coordinated Universal Time (UTC).

The default `ImageModTime` value is the time when you call `imwrite`.

Example: `'ImageModTime','17-Jan-2013 11:23:10'`

Data Types: `double` | `char`

`'InterlaceType'` — Interlacing scheme

`'none'` (default) | `'adam7'`

Interlacing scheme, specified as the comma-separated pair consisting of `'InterlaceType'` and either `'none'` for no interlacing, or `'adam7'` to use the Adam7 algorithm.

Example: `'InterlaceType','adam7'`

`'ResolutionUnit'` — Unit for image resolution

`'unknown'` (default) | `'meter'`

Unit for image resolution, specified as the comma-separated pair consisting of `'ResolutionUnit'` and either `'unknown'` or `'meter'`. If you specify `ResolutionUnit`, you must include at least one of the `XResolution` and `YResolution` name-value pair arguments. When the value of `ResolutionUnit` is `'meter'`, the `XResolution` and `YResolution` values are interpreted in pixels per meter.

Example: `'ResolutionUnit','meter','XResolution',1000`

`'SignificantBits'` — Number of bits to regard as significant

`[ ]` (default) | scalar | vector

Number of bits in the data array to regard as significant, specified as the comma-separated pair consisting of `'SignificantBits'` and a scalar or a vector in the range [1,`BitDepth`]. Depending on the output image type, the value must be in the following form.

Image Type	Form of `SignificantBits` Value
Grayscale image without an alpha channel	Scalar
Grayscale image with an alpha channel	2-element vector
Indexed image	3-element vector
Truecolor image without an alpha channel	3-element vector
Truecolor image with an alpha channel	4-element vector

Example: `'SignificantBits',[2,3]`

`'Software'` — Software used to create the image

character vector

Software used to create the image, specified as the comma-separated pair consisting of `'Software'` and a character vector.

`'Source'` — Device used to create the image
character vector

Device used to create the image, specified as the comma-separated pair consisting of `'Source'` and a character vector.

`'Transparency'` — Pixels to consider transparent
[ ] (default) | scalar in the range [0,1] | vector

Pixels to consider transparent when no alpha channel is used, specified as the comma-separated pair consisting of `'Transparency'` and a scalar or a vector. Depending on the output image, the value must be in the following form.

Image Type	Form of `Transparency` Value
Grayscale images	Scalar in the range [0,1], indicating the grayscale color to be considered transparent.
Indexed images	`Q`-element vector of values in the range [0,1], where `Q` is no larger than the colormap length and each value indicates the transparency associated with the corresponding colormap entry. In most cases, `Q = 1`.
Truecolor images	3-element vector of RGB intensities in the range [0,1], indicating the truecolor color to consider transparent.

Note: You cannot specify both `'Transparency'` and `'Alpha'` at the same time.

Example: `'Transparency',[1 1 1]`

Data Types: `double`

`'Warning'` — Warning of nature of content
character vector

Warning of nature of content, specified as the comma-separated pair consisting of `'Warning'` and a character vector.

`'XResolution'` — Image resolution in horizontal direction

scalar

Image resolution in the horizontal direction, in pixels/unit, specified as the comma-separated pair consisting of `'XResolution'` and a scalar. Define the unit by specifying the `ResolutionUnit` name-value pair argument.

If you do not also specify `YResolution`, then the `XResolution` value applies to both the horizontal and vertical directions.

Example: `'XResolution',900`

`'YResolution'` — Image resolution in vertical direction

scalar

Image resolution in the vertical direction, in pixels/unit, specified as the comma-separated pair consisting of `'XResolution'` and a scalar. Define the unit by specifying the `ResolutionUnit` name-value pair argument.

If you do not also specify `XResolution`, then the `YResolution` value applies to both the horizontal and vertical directions.

Example: `'YResolution',900`

RAS — Sun Raster Graphic

`'Alpha'` — Transparency of each pixel

`[ ]` (default) | matrix

Transparency of each pixel, specified as the comma-separated pair consisting of `'Alpha'` and a matrix with row and column dimensions the same as those of the image data array.

Valid only for truecolor (`m`-by-`n`-by-3) image data.

Data Types: `double` | `single` | `uint8` | `uint16`

`'Type'` — Image type

`'standard'` (default) | `'rgb'` | `'rle'`

Image type, specified as the comma-separated pair consisting of `'Type'` and one of the options in this table.

Value of Type	Description
`'standard'` (default)	Uncompressed, B-G-R color order for truecolor images
`'rgb'`	Uncompressed, R-G-B color order for truecolor images
`'rle`	Run-length encoding of 1-bit and 8-bit images

Example: `'Type','rgb'`

TIFF — Tagged Image File Format

`'ColorSpace'` — Color space representing color data

`'rgb'` (default) | `'cielab'` | `'icclab'`

Color space representing the color data, specified as the comma-separated pair consisting of `'ColorSpace'` and one of these options:

- `'rgb'`
- `'cielab'`
- `'icclab'`

Valid only when the image data array, `A`, is truecolor (`m`-by-`n`-by-3). To use the CMYK color space in a TIFF file, do not use the `'ColorSpace'` name-value pair argument. Instead, specify an `m`-by-`n`-by-4 image data array.

`imwrite` can write color image data that uses the $L^*a^*b^*$ color space to TIFF files. The 1976 CIE $L^*a^*b^*$ specification defines numeric values that represent luminance (L^*) and chrominance (a^* and b^*) information. To store $L^*a^*b^*$ color data in a TIFF file, the values must be encoded to fit into either 8-bit or 16-bit storage. `imwrite` can store $L^*a^*b^*$ color data in a TIFF file using the following encodings:

- CIELAB encodings — 8-bit and 16-bit encodings defined by the TIFF specification
- ICCLAB encodings — 8-bit and 16-bit encodings defined by the International Color Consortium

The output class and encoding used by `imwrite` depends on the class of the input image data array and the `ColorSpace` value, as shown in the following table. (The 8-bit and 16-bit CIELAB encodings cannot be input arrays because they use a mixture of signed and unsigned values and cannot be represented as a single MATLAB array.)

Input Class and Encoding	Value of `ColorSpace`	Output Class and Encoding
8-bit ICCLAB Values are integers in the range [0 255]. L^* values are multiplied by `255/100`. `128` is added to both the a^* and b^* values.	`'icclab'`	8-bit ICCLAB
	`'cielab'`	8-bit CIELAB
16-bit ICCLAB Values are integers in the range [0, 65280]. L^* values are multiplied by `65280/100`. `32768` is added to both the a^* and b^* values, which are represented as integers in the range [0,65535].	`'icclab'`	16-bit ICCLAB
	`'cielab'`	16-bit CIELAB
Double-precision 1976 CIE $L^*a^*b^*$ values L^* is in the dynamic range [0, 100]. a^* and b^* can take any value. Setting a^* and b^* to 0 (zero) produces a neutral color (gray).	`'icclab'`	8-bit ICCLAB
	`'cielab'`	8-bit CIELAB

Example: `'ColorSpace','cielab'`

`'Compression'` — Compression scheme
`'packbits'` | `'none'` | `'lzw'` | `'deflate'` | `'jpeg'` | `'ccitt'` | `'fax3'` | `'fax4'`

Compression scheme, specified as the comma-separated pair consisting of `'Compression'` and one of these options:

- `'packbits'` (default for nonbinary images)
- `'none'`
- `'lzw'`
- `'deflate'`
- `'jpeg'`
- `'ccitt'` (binary images only, and the default for such images)
- `'fax3'` (binary images only)
- `'fax4'` (binary images only)

`'jpeg'` is a lossy compression scheme; other compression modes are lossless. Also, if you specify `'jpeg'` compression, you must specify the `'RowsPerStrip'` parameter and the value must be a multiple of 8.

Example: `'Compression','none'`

`'Description'` — Image description

character vector

Image description, specified by the comma-separated pair consisting of `'Description'` and a character vector. This is the text that `imfinfo` returns in the `ImageDescription` field for the output image.

Example: `'Description','Sample 2A301'`

`'Resolution'` — X- and Y-resolution

72 (default) | scalar | two-element vector

X- and Y-resolution, specified as the comma-separated pair consisting of `'Resolution'` and a scalar indicating both resolution, or a two-element vector containing the X-Resolution and Y-Resolution.

Example: `'Resolution',80`

Example: `'Resolution',[320,72]`

Data Types: `double`

`'RowsPerStrip'` — Number of rows to include in each strip

scalar

Number of rows to include in each strip, specified as the comma-separated pair consisting of `'RowsPerStrip'` and a scalar. The default value is such that each strip is about 8 kilobytes.

You must specify `RowsPerStrip` if you specify `'jpeg'` compression. The value must be a multiple of 8.

Example: `'RowsPerStrip',16`

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'WriteMode'` — Writing mode
`'overwrite'` (default) | `'append'`

Writing mode, specified as the comma-separated pair consisting of `'WriteMode'` and either `'overwrite'` or `'append'`. In `overwrite` mode, `imwrite` overwrites an existing file. In `append` mode, `imwrite` adds a page to the existing file.

Example: `'WriteMode','append'`

Tips

- For copyright information, see the `libtiffcopyright.txt` file.

See Also

See Also
`fwrite` | `getframe` | `imfinfo` | `imformats` | `imread` | Tiff

Introduced before R2006a

incenters

Class: TriRep

(Not recommended) Incenters of specified simplices

Note: `incenters(TriRep)` is not recommended. Use incenter(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
IC = incenters(TR,SI)
[IC RIC] = incenters(TR, SI)
```

Description

`IC = incenters(TR,SI)` returns the coordinates of the incenter of each specified simplex `SI`.

`[IC RIC] = incenters(TR, SI)` returns the incenters and the corresponding radius of the inscribed circle/sphere.

Input Arguments

`TR`	Triangulation representation.
`SI`	Column vector of simplex indices that index into the triangulation matrix `TR.Triangulation`. If `SI` is not specified the incenter information for the entire triangulation is returned, where the incenter associated with simplex `i` is the `i`'th row of `IC`.

Output Arguments

`IC`	`m`-by-`n` matrix, where `m = length(SI)`, the number of specified simplices, and `n` is the dimension of the space where the triangulation resides. Each row `IC(i,:)` represents the coordinates of the incenter of simplex `SI(i)`.
`RIC`	Vector of length `length(SI)`, the number of specified simplices.

Examples

Example 1

Load a 3-D triangulation:

```
load tetmesh
```

Use `TriRep` to compute the incenters of the first five tetrahedra.

```
trep = TriRep(tet, X)
ic = incenters(trep, [1:5]')
```

Example 2

Query a 2-D triangulation created with `DelaunayTri`.

```
x = [0 1 1 0 0.5]';
y = [0 0 1 1 0.5]';
dt = DelaunayTri(x,y);
```

Compute incenters of the triangles:

```
ic = incenters(dt);
```

Plot the triangles and incenters:

```
triplot(dt);
axis equal;
axis([-0.2 1.2 -0.2 1.2]);
hold on;
plot(ic(:,1),ic(:,2),'*r');
```

```
hold off;
```

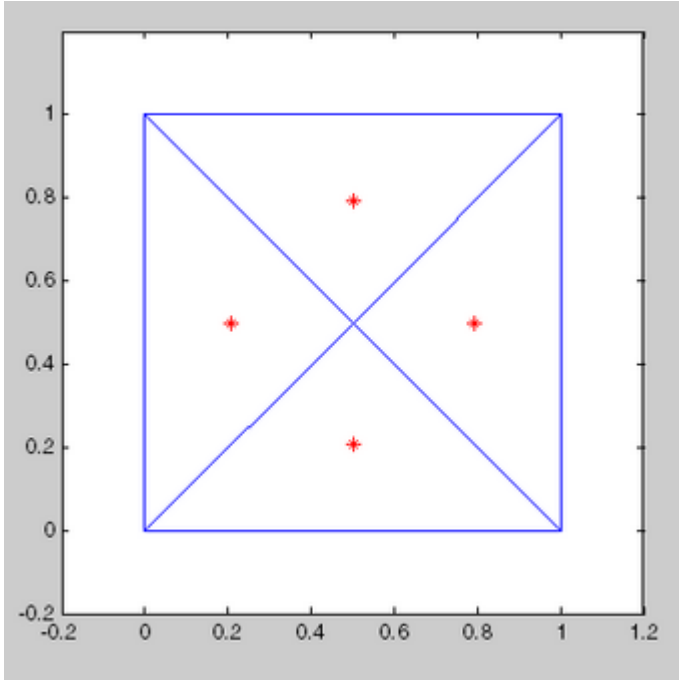

Definitions

Simplex

A simplex is a triangle/tetrahedron or higher-dimensional equivalent.

See Also

triangulation | delaunayTriangulation | circumcenter

inOutStatus

Class: DelaunayTri

(Not recommended) Status of triangles in 2-D constrained Delaunay triangulation

---

Note: `inOutStatus(DelaunayTri)` is not recommended. Use isInterior(delaunayTriangulation) instead.

`DelaunayTri` is not recommended. Use delaunayTriangulation instead.

Syntax

```
IN = inOutStatus(DT)
```

Description

`IN = inOutStatus(DT)` returns the in/out status of the triangles in a 2-D constrained Delaunay triangulation of a geometric domain. Given a Delaunay triangulation that has a set of constrained edges that define a bounded geometric domain. The `i`'th triangle in the triangulation is classified as inside the domain if `IN(i) = 1` and outside otherwise.

Note: `inOutStatus` is only relevant for 2-D constrained Delaunay triangulations where the imposed edge constraints bound a closed geometric domain.

Input Arguments

`DT`	Delaunay triangulation.

Output Arguments

IN	Logical array of length equal to the number of triangles in the triangulation. The constrained edges in the triangulation define the boundaries of a valid geometric domain.

Examples

Create a geometric domain that consists of a square with a square hole:

```
outerprofile = [-5 -5; -3 -5; -1 -5; 1 -5; 3 -5; ...
 5 -5; 5 -3; 5 -1; 5 1; 5 3;...
 5 5; 3 5; 1 5; -1 5; -3 5; ...
 -5 5; -5 3; -5 1; -5 -1; -5 -3; ];
innerprofile = outerprofile.*0.5;
profile = [outerprofile; innerprofile];
outercons = [(1:19)' (2:20)'; 20 1;];
innercons = [(21:39)' (22:40)'; 40 21];
edgeconstraints = [outercons; innercons];
```

Create a constrained Delaunay triangulation of the domain:

```
dt = DelaunayTri(profile, edgeconstraints)
subplot(1,2,1);
triplot(dt);
hold on;
plot(dt.X(outercons',1), dt.X(outercons',2), ...
     '-r', 'LineWidth', 2);
plot(dt.X(innercons',1), dt.X(innercons',2), ...
     '-r', 'LineWidth', 2);
axis equal;
% Plot showing interior and exterior
% triangles with respect to the domain.
hold off;
subplot(1,2,2);
inside = inOutStatus(dt);
triplot(dt(inside, :), dt.X(:,1), dt.X(:,2));
hold on;
plot(dt.X(outercons',1), dt.X(outercons',2), ...
     '-r', 'LineWidth', 2);
plot(dt.X(innercons',1), dt.X(innercons',2), ...
     '-r', 'LineWidth', 2);
axis equal;
```

```
% Plot showing interior triangles only
hold off;
```

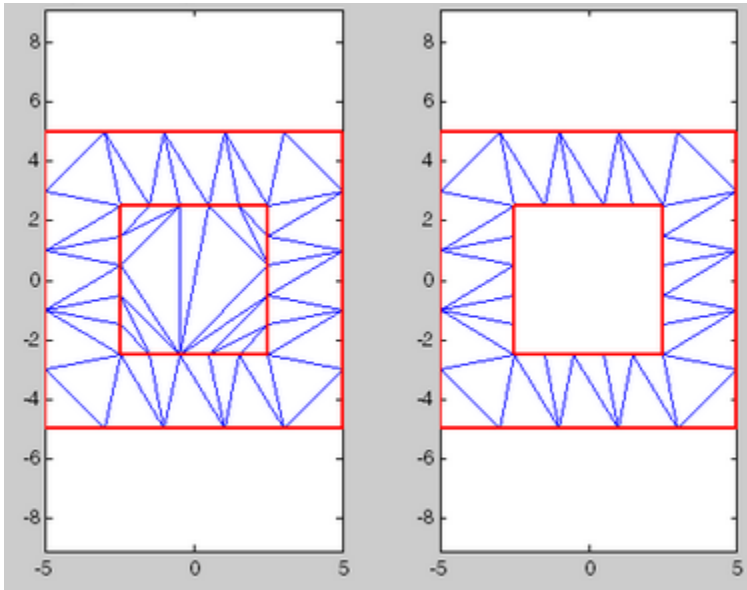

See Also

triangulation | delaunayTriangulation | isInterior

ind2rgb

Convert indexed image to RGB image

Syntax

```
RGB = ind2rgb(X,map)
```

Description

`RGB = ind2rgb(X,map)` converts the indexed image, `X`, and the corresponding colormap, `map`, to the truecolor image, `RGB`. The indexed image, `X`, is an m-by-n array of integers. The colormap, `map`, is a three-column array of values in the range [0,1]. Each row of `map` is a three-element RGB triplet that specifies the red, green, and blue components of a single color of the colormap.

- If you specify `X` as an array of class `uint8` or `uint16`, then the value 0 corresponds to the first color in the colormap.
- If you specify `X` as an array of class `single` or `double`, then the value 1 corresponds to the first color in the colormap.

The truecolor image output, `RGB`, is an m-by-n-by-3 array. For more information on image types, see "Image Types".

Class Support

`X` can be of class `uint8`, `uint16`, `single`, or `double`. `RGB` is an m-by-n-by-3 array of class `double`.

See Also

`image` | `imread`

Introduced before R2006a

ind2sub

Subscripts from linear index

Syntax

```
[I,J] = ind2sub(siz,IND)
[I1,I2,I3,...,In] = ind2sub(siz,IND)
```

Description

The `ind2sub` command determines the equivalent subscript values corresponding to a single index into an array.

`[I,J] = ind2sub(siz,IND)` returns the matrices `I` and `J` containing the equivalent row and column subscripts corresponding to each linear index in the matrix `IND` for a matrix of size `siz`. `siz` is a vector with `ndim(A)` elements (in this case, 2), where `siz(1)` is the number of rows and `siz(2)` is the number of columns.

Note For matrices, `[I,J] = ind2sub(size(A),find(A>5))` returns the same values as `[I,J] = find(A>5)`.

`[I1,I2,I3,...,In] = ind2sub(siz,IND)` returns `n` subscript arrays `I1`,`I2`,`...`,`In` containing the equivalent multidimensional array subscripts equivalent to `IND` for an array of size `siz`. `siz` is an `n`-element vector that specifies the size of each array dimension.

The `IND` input can be `single`, `double`, or any integer type. The outputs are always of class `double`.

Examples

Example 1 — Two-Dimensional Matrices

The mapping from linear indexes to subscript equivalents for a 3-by-3 matrix is

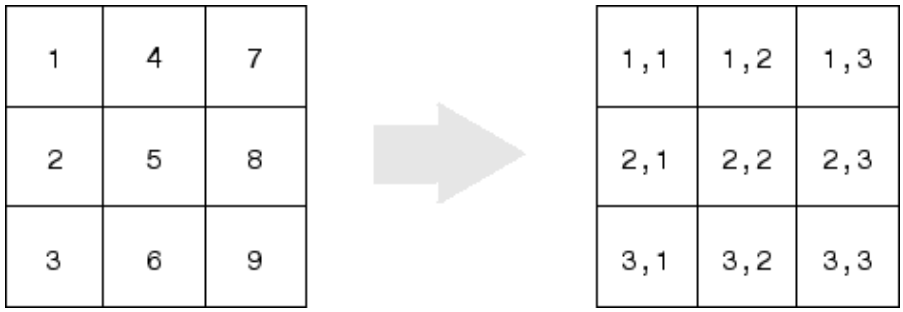

This code determines the row and column subscripts in a 3-by-3 matrix, of elements with linear indices 3, 4, 5, 6.

```
IND = [3 4 5 6]
s = [3,3];
[I,J] = ind2sub(s,IND)

I =
     3     1     2     3

J =
     1     2     2     2
```

Example 2 — Three-Dimensional Matrices

The mapping from linear indexes to subscript equivalents for a 2-by-2-by-2 array is

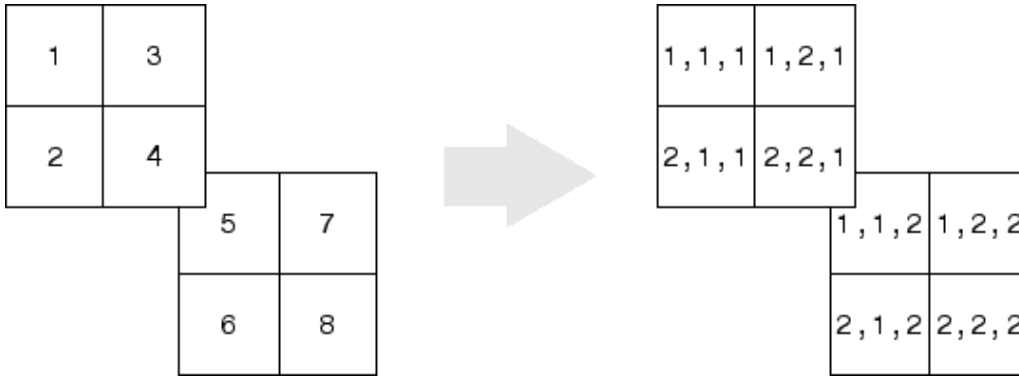

This code determines the subscript equivalents in a 2-by-2-by-2 array, of elements whose linear indices 3, 4, 5, 6 are specified in the `IND` matrix.

```
IND = [3 4;5 6];
s = [2,2,2];
[I,J,K] = ind2sub(s,IND)

I =
     1     2
     1     2

J =
     2     2
     1     1

K =
     1     1
     2     2
```

Example 3 — Effects of Returning Fewer Outputs

When calling `ind2sub` for an N-dimensional matrix, you would typically supply N output arguments in the call: one for each dimension of the matrix. This example shows what happens when you return three, two, and one output when calling `ind2sub` on a 3-dimensional matrix.

The matrix is 2-by-2-by-2 and the linear indices are 1 through 8:

```
dims = [2 2 2];
indices = [1 2 3 4 5 6 7 8];
```

The 3-output call to `ind2sub` returns the expected subscripts for the 2-by-2-by-2 matrix:

```
[rowsub colsub pagsub] = ind2sub(dims, indices)
rowsub =
     1     2     1     2     1     2     1     2
colsub =
     1     1     2     2     1     1     2     2
pagsub =
     1     1     1     1     2     2     2     2
```

If you specify only two outputs (row and column), `ind2sub` still returns a subscript for each specified index, but drops the third dimension from the matrix, returning subscripts for a 2-dimensional, 2-by-4 matrix instead:

```
[rowsub colsub] = ind2sub(dims, indices)
rowsub =
     1     2     1     2     1     2     1     2
colsub =
     1     1     2     2     3     3     4     4
```

If you specify one output (row), `ind2sub` drops both the second and third dimensions from the matrix, and returns subscripts for a 1-dimensional, 1-by-8 matrix instead:

```
[rowsub] = ind2sub(dims, indices)
rowsub =
     1     2     3     4     5     6     7     8
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The first argument must be a valid size vector. Size vectors for arrays with more than `intmax` elements are not supported.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

`find` | `size` | `sub2ind`

Introduced before R2006a

Inf

Infinity

Syntax

```
Inf
I = Inf(n)
I = Inf(sz1,...,szN)
I = Inf(sz)

I = Inf(classname)
I = Inf(n,classname)
I = Inf(sz1,...,szN,classname)
I = Inf(sz,classname)

I = Inf('like',p)
I = Inf(n,'like',p)
I = Inf(sz1,...szN,'like',p)
I = Inf(sz,'like',p)
```

Description

`Inf` returns the IEEE arithmetic representation for positive infinity. Infinity values result from operations like division by zero and overflow, which lead to results too large to represent as conventional floating-point values.

`I = Inf(n)` is an `n`-by-`n` matrix of `Inf` values.

`I = Inf(sz1,...,szN)` is a `sz1`-by-...-by-`szN` array of `Inf` values where `sz1,...,szN` indicates the size of each dimension. For example, `Inf(3,4)` returns a 3-by-4 array of `Inf` values.

`I = Inf(sz)` is an array of `Inf` values where the size vector, `sz`, defines `size(I)`. For example, `Inf([3,4])` returns a 3-by-4 array of `Inf` values.

Note The size inputs `sz1,...,szN`, as well as the elements of the size vector `sz`, should be nonnegative integers. Negative integers are treated as 0.

`I = Inf(classname)` returns an `Inf` value where the string, `classname`, specifies the data type. `classname` can be either `'single'` or `'double'`.

`I = Inf(n,classname)` returns an `n`-by-`n` array of `Inf` values of data type `classname`.

`I = Inf(sz1,...,szN,classname)` returns a `sz1`-by-...-by-`szN` array of `Inf` values of data type `classname`.

`I = Inf(sz,classname)` returns an array of `Inf` values where the size vector, `sz`, defines `size(I)` and `classname` defines `class(I)`.

`I = Inf('like',p)` returns an array of `Inf`s of the same data type, sparsity, and complexity (real or complex) as the numeric variable, `p`.

`I = Inf(n,'like',p)` returns an `n`-by-`n` array of `Inf` values like `p`.

`I = Inf(sz1,...szN,'like',p)` returns a `sz1`-by-...-by-`szN` array of `Inf` values like `p`.

`I = Inf(sz,'like',p)` returns an array of `Inf` values like `p` where the size vector, `sz`, defines `size(I)`.

Examples

`1/0`, `1.e1000`, `2^2000`, and `exp(1000)` all produce `Inf`.

`log(0)` produces `-Inf`.

`Inf-Inf` and `Inf/Inf` both produce `NaN` (Not-a-Number).

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Dimensions must be real, nonnegative, integers.

See Also

See Also

`isfinite` | `isfloat` | `isinf` | `nan`

Topics

"Class Support for Array-Creation Functions"

Introduced before R2006a

info

Information about contacting MathWorks

Note: `info` will be removed in a future release.

Syntax

```
info
```

Description

`info` displays in the Command Window, information about contacting MathWorks.

See Also

`help` | `version`

Introduced before R2006a

inline

Construct inline object

Compatibility

`inline` will be removed in a future release. Use “Anonymous Functions” instead.

Syntax

```
inline(expr)
inline(expr,arg1,arg2,...)
inline(expr,n)
```

Description

`inline(expr)` constructs an inline function object from the MATLAB expression contained in `expr`. The input argument to the inline function is automatically determined by searching `expr` for an isolated lower case alphabetic character, other than `i` or `j`, that is not part of a word formed from several alphabetic characters. If no such character exists, `x` is used. If the character is not unique, the one closest to `x` is used. If two characters are found, the one later in the alphabet is chosen.

`inline(expr,arg1,arg2,...)` constructs an inline function whose input arguments are specified by `arg1`, `arg2`,`...`. Multicharacter symbol names may be used.

`inline(expr,n)` where `n` is a scalar, constructs an inline function whose input arguments are `x`, `P1`, `P2`, ...

Examples

Example 1

This example creates a simple inline function to square a number.

```
g = inline('t^2')
g =

     Inline function:
     g(t) = t^2
```

You can convert the result to a character vector using the `char` function.

```
char(g)

ans =

t^2
```

Example 2

This example creates an inline function to represent the formula $f = 3\sin(2x^2)$. The resulting inline function can be evaluated with the `argnames` and `formula` functions.

```
f = inline('3*sin(2*x.^2)')

f =
     Inline function:
     f(x) = 3*sin(2*x.^2)

argnames(f)

ans =
    'x'

formula(f)
ans =

3*sin(2*x.^2)
```

Example 3

This call to `inline` defines the function `f` to be dependent on two variables, `alpha` and `x`:

```
f = inline('sin(alpha*x)')

f =
```

```
     Inline function:
     f(alpha,x) = sin(alpha*x)
```

If `inline` does not return the desired function variables or if the function variables are in the wrong order, you can specify the desired variables explicitly with the `inline` argument list.

```
g = inline('sin(alpha*x)','x','alpha')

g =

     Inline function:
     g(x,alpha) = sin(alpha*x)
```

Tips

Three commands related to `inline` allow you to examine an inline function object and determine how it was created.

`char(fun)` converts the inline function into a character array. This is identical to `formula(fun)`.

`argnames(fun)` returns the names of the input arguments of the inline object `fun` as a cell array of character vectors.

`formula(fun)` returns the formula for the inline object `fun`.

A fourth command `vectorize(fun)` inserts a `.` before any `^`, `*` or `/'` in the formula for `fun`. The result is a vectorized version of the inline function.

Introduced before R2006a

inmem

Names of functions, MEX-files, classes in memory

Syntax

```
M = inmem
[M,X] = inmem
[M,X,C] = inmem
[...] = inmem('-completenames')
```

Description

`M = inmem` returns a cell array of strings containing the names of the functions that are currently loaded.

`[M,X] = inmem` returns an additional cell array `X` containing the names of the MEX-files that are currently loaded.

`[M,X,C] = inmem` also returns a cell array `C` containing the names of the classes that are currently loaded.

`[...] = inmem('-completenames')` returns not only the names of the currently loaded function and MEX-files, but the path and filename extension for each as well. No additional information is returned for loaded classes.

Examples

Functions in Memory

List the functions that remain in memory after calling the `magic` function.

```
clear all
magic(10);
```

```
M = inmem
```

```
M =
```

```
    'workspacefunc'
    'magic'
```

The function list includes `magic` and additional functions that are in memory in your current session.

MEX-Files in Memory

Call a sample MEX-function named `arrayProduct`, and then verify that the MEX-function is in memory. You must have a supported C compiler installed on your system to run this example.

```
clear all
sampleFolder = fullfile(matlabroot,'extern','examples','mex');
addpath(sampleFolder)
mex arrayProduct.c

s = 5;
A = [1.5, 2, 9];
B = arrayProduct(s,A);

[M,X] = inmem('-completenames');
X
```

```
X 
    'matlabroot\extern\examples\mex\arrayProduct.mexw64'
```

Tips

If `inmem` is called with any argument other than `'-completenames'`, it behaves as if it were called with no argument.

See Also

`clear`

Introduced before R2006a

innerjoin

Inner join between two tables or timetables

Syntax

```
C = innerjoin(A,B)
C = innerjoin(A,B,Name,Value)
[C,ia,ib] = innerjoin( ___ )
```

Description

`C = innerjoin(A,B)` creates the table or timetable, `C`, as the inner join between `A` and `B` by matching up rows using all the variables with the same name as key variables. You can perform inner joins only on certain combinations of tables and timetables.

- If `A` is a table, then `B` must be a table. `innerjoin` returns `C` as a table.
- If `A` is a timetable, then `B` can be either a table or a timetable. `innerjoin` returns `C` as a timetable for either combination of inputs.

The inner join retains only the rows that match between `A` and `B` with respect to the key variables. `C` contains all nonkey variables from `A` and `B`.

The row labels of `A` and `B` can be key variables. Row labels are the row names of a table, or the row times of a timetable.

`C = innerjoin(A,B,Name,Value)` performs the inner-join operation with additional options specified by one or more `Name,Value` pair arguments.

For example, you can specify the variables to use as key variables.

`[C,ia,ib] = innerjoin( ___ )` also returns index vectors, `ia` and `ib` indicating the correspondence between rows in `C` and those in `A` and `B` respectively. You can use this syntax with any of the input arguments in the previous syntaxes.

Examples

Inner-Join Operation of Tables with One Variable in Common

Create a table, A.

```
A = table([5;12;23;2;6],...
    {'cereal';'pizza';'salmon';'cookies';'pizza'},...
    'VariableNames',{'Age','FavoriteFood'})
```

```
A = 5×2 table
    Age    FavoriteFood
    ___    ____________

     5     'cereal'
    12     'pizza'
    23     'salmon'
     2     'cookies'
     6     'pizza'
```

Create a table, B, with one variable in common with A.

```
B = table({'cereal';'cookies';'pizza';'salmon';'cake'},...
    [110;160;140;367;243],...
    {'A-';'D';'B';'B';'C-'},...
    'VariableNames',{'FavoriteFood','Calories','NutritionGrade'})
```

```
B = 5×3 table
    FavoriteFood    Calories    NutritionGrade
    ____________    ________    ______________

    'cereal'        110         'A-'
    'cookies'       160         'D'
    'pizza'         140         'B'
    'salmon'        367         'B'
    'cake'          243         'C-'
```

Use the `innerjoin` function to create a new table, C, with data from tables A and B.

```
C = innerjoin(A,B)
```

```
C = 5×4 table
```

```
    Age    FavoriteFood    Calories    NutritionGrade
    ___    ____________    ________    ______________

     5     'cereal'        110         'A-'
     2     'cookies'       160         'D'
    12     'pizza'         140         'B'
     6     'pizza'         140         'B'
    23     'salmon'        367         'B'
```

Table C is sorted by the key variable, FavoriteFood.

Inner-Join Operation of Tables and Indices to Values

Create a table, A.

```
A = table({'a' 'b' 'c' 'e' 'h'}',[1 2 3 11 17]',...
    'VariableNames',{'Key1' 'Var1'})
```

```
A = 5×2 table
    Key1    Var1
    ____    ____

    'a'      1
    'b'      2
    'c'      3
    'e'     11
    'h'     17
```

Create a table, B, with common values in the variable Key1 between tables A and B, but also containing rows with values of Key1 not present in A.

```
B = table({'a' 'b' 'd' 'e'}',[4 5 6 7]',...
    'VariableNames',{'Key1' 'Var2'})
```

```
B = 4×2 table
    Key1    Var2
    ____    ____

    'a'     4
    'b'     5
    'd'     6
    'e'     7
```

Use the `innerjoin` function to create a new table, `C`, with data from tables `A` and `B`. Retain only rows whose values in the variable `Key1` match.

Also, return index vectors, `ia` and `ib` indicating the correspondence between rows in `C` and rows in `A` and `B` respectively.

```
[C,ia,ib] = innerjoin(A,B)
```

```
C = 3×3 table
    Key1    Var1    Var2
    ____    ____    ____

    'a'      1       4
    'b'      2       5
    'e'     11       7


ia =

     1
     2
     4


ib =

     1
     2
     4
```

Table `C` is sorted by the values in the key variable, `Key1`, and contains the horizontal concatenation of `A(ia,:)` and `B(ib,'Var2')` .

Inner-Join Operation of Tables Using Left and Right Keys

Create a table, `A`.

```
A = table([10;4;2;3;7],[5;4;9;6;1],[10;3;8;8;4])
```

```
A = 5×3 table
```

```
    Var1    Var2    Var3
    ____    ____    ____

    10       5      10
     4       4       3
     2       9       8
     3       6       8
     7       1       4
```

Create a table, B, with common values in the second variable as the first variable of table A.

```
B = table([6;1;1;6;8],[2;3;4;5;6])
```

```
B = 5×2 table
    Var1    Var2
    ____    ____

    6       2
    1       3
    1       4
    6       5
    8       6
```

Use the `innerjoin` function to create a new table, C, with data from tables A and B. Use the first variable of A and the second variable of B as key variables.

```
[C,ia,ib] = innerjoin(A,B,'LeftKeys',1,'RightKeys',2)
```

```
C = 3×4 table
    Var1_A    Var2    Var3    Var1_B
    ______    ____    ____    ______

    2         9       8       6
    3         6       8       1
    4         4       3       1


ia =

     3
     4
```

```
     2


ib =

     1
     2
     3
```

Table C retains only the rows that match between A and B with respect to the key variables.

Table C contains the horizontal concatenation of `A(ia,:)` and `B(ib,'Var1')`.

Inner-Join Operation of Timetables

Create two timetables, A and B. They have some row times in common, but each also includes row times that are not in the other timetable.

```
A = timetable(seconds([1;2;4;6]),[1 2 3 11]')
```

```
A = 4×1 timetable
     Time    Var1
    _____    ____

    1 sec     1
    2 sec     2
    4 sec     3
    6 sec    11
```

```
B = timetable(seconds([2;4;6;7]),[4 5 6 7]')
```

```
B = 4×1 timetable
     Time    Var1
    _____    ____

    2 sec    4
    4 sec    5
    6 sec    6
    7 sec    7
```

Combine A and B with an inner join. C matches up the rows with common row times. C does not contain any other rows from either timetable.

```
C = innerjoin(A,B)
```

```
C = 3×2 timetable
     Time    Var1_A    Var1_B
    _____    ______    ______

    2 sec     2        4
    4 sec     3        5
    6 sec    11        6
```

Input Arguments

A,B — Input tables

tables | timetables

Input tables, specified as tables or as timetables.

Name-Value Pair Arguments

Specify optional comma-separated pairs of Name,Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside single quotes (' '). You can specify several name and value pair arguments in any order as Name1,Value1,...,NameN,ValueN.

Example: 'Keys',2 uses the second variable in A and the second variable in B as key variables.

'Keys' — Variables to use as keys

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables to use as keys, specified as the comma-separated pair consisting of 'Keys' and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You cannot use the 'Keys' name-value pair argument with the 'LeftKeys' and 'RightKeys' name-value pair arguments.

Row labels can be keys, alone or in combination with other key variables. For more information, see the "Tips" on page 1-5680 section.

Example: `'Keys',[1 3]` uses the first and third variables in `A` and `B` as a key variables.

`'LeftKeys'` — Variables to use as keys in `A`

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables to use as keys in `A`, specified as the comma-separated pair consisting of `'LeftKeys'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You must use the `'LeftKeys'` name-value pair argument in conjunction with the `'RightKeys'` name-value pair argument. `'LeftKeys'` and `'RightKeys'` both must specify the same number of key variables. `innerjoin` pairs key values based on their order.

Row labels can be keys, alone or in combination with other key variables. For more information, see the "Tips" on page 1-5680 section.

Example: `'LeftKeys',1` uses only the first variable in `A` as a key variable.

`'RightKeys'` — Variables to use as keys in `B`

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables to use as keys in `B`, specified as the comma-separated pair consisting of `'RightKeys'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You must use the `'RightKeys'` name-value pair argument in conjunction with the `'LeftKeys'` name-value pair argument. `'LeftKeys'` and `'RightKeys'` both must specify the same number of key variables. `innerjoin` pairs key values based on their order.

Row labels can be keys, alone or in combination with other key variables. For more information, see the "Tips" on page 1-5680 section.

Example: `'RightKeys',3` uses only the third variable in `B` as a key variable.

`'LeftVariables'` — Variables from `A` to include in `C`

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables from A to include in C, specified as the comma-separated pair consisting of 'LeftVariables' and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You can use 'LeftVariables' to include or exclude key variables, as well as nonkey variables from the output, C.

By default, innerjoin includes all variables from A.

'RightVariables' — Variables from B to include in C
positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables from B to include in C, specified as the comma-separated pair consisting of 'RightVariables' and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You can use 'RightVariables' to include or exclude key variables, as well as nonkey variables from the output, C.

By default, innerjoin includes all the variables from B except the key variables.

Output Arguments

C — Inner join from A and B
table | timetable

Inner join from A and B, returned as a table or a timetable. The output table or timetable, C, contains one row for each pair of rows in A and B that share the same combination of values in the key variables. If A and B contain variables with the same name, innerjoin adds a unique suffix to the corresponding variable names in C.

In general, if there are m rows in A and n rows in B that all contain the same combination of values in the key variables, then C contains m*n rows for that combination.

C is sorted by the values in the key variables and contains the horizontal concatenation of A(ia,LeftVars) and B(ib,RightVars). By default, LeftVars consists of all the variables of A, and RightVars consists of all the nonkey variables from B. Otherwise, LefttVars consists of the variables specified by the 'LeftVariables' name-value pair

argument, and `RightVars` is the variables specified by the `'RightVariables'` name-value pair argument.

You can store additional metadata such as descriptions, variable units, variable names, and row names in `C`. For more information, see Table Properties or Timetable Properties.

`ia` — Index to `A`
column vector

Index to `A`, returned as a column vector. Each element of `ia` identifies the row in `A` that corresponds to that row in the output table or timetable, `C`.

`ib` — Index to `B`
column vector

Index to `B`, returned as a column vector. Each element of `ib` identifies the row in `B` that corresponds to that row in the output table or timetable, `C`.

Definitions

Key Variable

Variable used to match and combine data between the input tables, `A` and `B`.

Tips

Row labels from the input tables `A` and `B` can be keys, alone or in combination with other key variables. Row labels are the row names of a table or the row times of a timetable. In general, `innerjoin` copies row labels from the input table `A` to the output table `C`.

- If `A` has no row labels, then `C` has no row labels.
- If `A` has row labels, then `innerjoin` copies row labels from `A` to create row labels in `C`.
  - However, if both `A` and `B` are tables, but you do not specify either input table's row names as a key, then `innerjoin` does not create row names in `C`.

You cannot perform an inner join using the row labels of `A` as the left key and a variable of `B` as the right key. To perform the inner join, convert the row labels of `A` to a table variable and use the new table variable as a key.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- You cannot join two tall inputs. `innerjoin` can join together:
  - A tall table with a regular table.
  - A tall timetable with a regular table or timetable.
- You must specify one output argument. The three-output syntax `[C,ia,ib] = innerjoin(___)` is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`join` | `outerjoin`

Introduced in R2013b

inpolygon

Points located inside or on edge of polygonal region

Syntax

```
in = inpolygon(xq,yq,xv,yv)
[in,on] = inpolygon(xq,yq,xv,yv)
```

Description

`in = inpolygon(xq,yq,xv,yv)` returns `in` indicating if the query points specified by `xq` and `yq` are inside or on the edge of the polygon area defined by `xv` and `yv`.

`[in,on] = inpolygon(xq,yq,xv,yv)` also returns `on` indicating if the query points are on the edge of the polygon area.

Examples

Points Inside Convex Polygon

Define a pentagon and a set of points. Then, determine which points lie inside (or on the edge) of the pentagon.

Define the x and y coordinates of polygon vertices to create a pentagon.

```
L = linspace(0,2.*pi,6);
xv = cos(L)';
yv = sin(L)';
```

Define x and y coordinates of 250 random query points. Initialize the random-number generator to make the output of `randn` repeatable.

```
rng default
xq = randn(250,1);
```

```
yq = randn(250,1);
```

Determine whether each point lies inside or on the edge of the polygon area. Also determine whether any of the points lie on the edge of the polygon area.

```
[in,on] = inpolygon(xq,yq,xv,yv);
```

Determine the number of points lying inside or on the edge of the polygon area.

```
numel(xq(in))
```

```
ans = 80
```

Determine the number of points lying on the edge of the polygon area.

```
numel(xq(on))
```

```
ans = 0
```

Since there are no points lying on the edge of the polygon area, all 80 points identified by `xq(in)`, `yq(in)` are strictly inside the polygon area.

Determine the number of points lying outside the polygon area (not inside or on the edge).

```
numel(xq(~in))
```

```
ans = 170
```

Plot the polygon and the query points. Display the points inside the polygon with a red plus. Display the points outside the polygon with a blue circle.

```
figure

plot(xv,yv) % polygon
axis equal

hold on
plot(xq(in),yq(in),'r+') % points inside
plot(xq(~in),yq(~in),'bo') % points outside
hold off
```

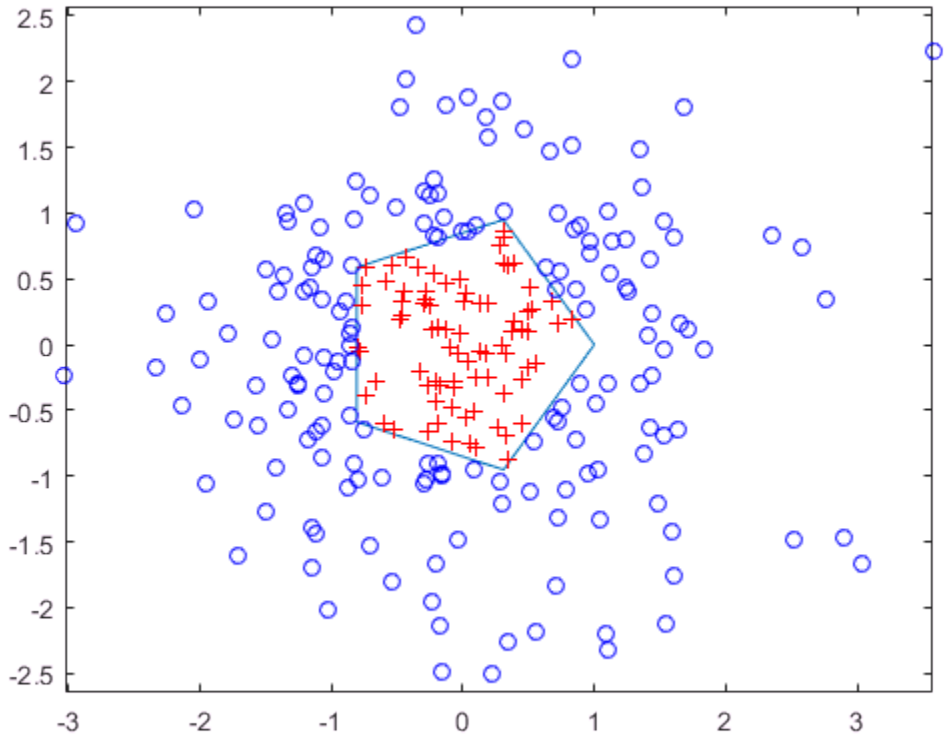

Points Inside Multiply Connected Polygon

Find the points inside a square with a square hole.

Define a square region with a square hole. Specify the vertices of the outer loop in a counterclockwise direction, and specify the vertices for the inner loop in a clockwise direction. Use `NaN` to separate the coordinates for the outer and inner loops.

```
xv = [1 4 4 1 1 NaN 2 2 3 3 2];
yv = [1 1 4 4 1 NaN 2 3 3 2 2];
```

Define x and y coordinates of 500 random points. Initialize the random-number generator to make the output of `randn` repeatable.

```
rng default
xq = rand(500,1)*5;
yq = rand(500,1)*5;
```

Determine whether each point lies inside or on the edge of the polygon area.

```
in = inpolygon(xq,yq,xv,yv);
```

Plot the polygon and the query points. Display the points inside the polygon with a red plus. Display the points outside the polygon with a blue circle.

```
figure

plot(xv,yv,'LineWidth',2) % polygon
axis equal

hold on
plot(xq(in),yq(in),'r+') % points inside
plot(xq(~in),yq(~in),'bo') % points outside
hold off
```

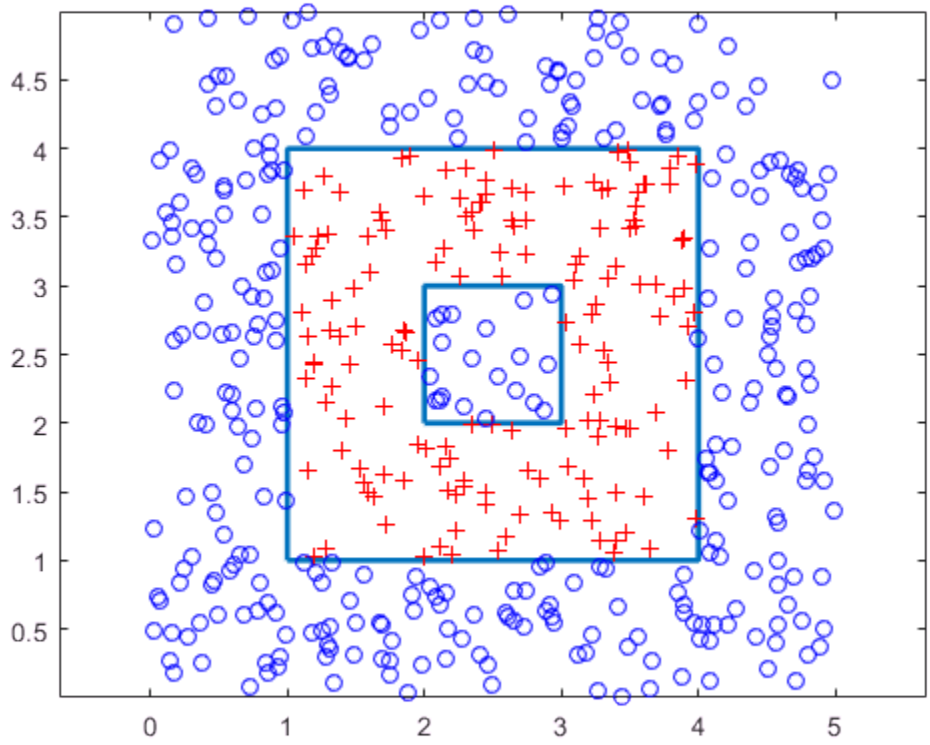

Query points in the square hole are outside the polygon.

Points Inside Self-Intersecting Polygon

Define the x and y coordinates for a pentagram.

```
xv = [0.5;0.2;1.0;0;0.8;0.5];
yv = [1.0;0.1;0.7;0.7;0.1;1];
```

Define the x and y coordinates of 12 query points.

```
xq = [0.1;0.5;0.9;0.2;0.4;0.5;0.5;0.9;0.6;0.8;0.7;0.2];
yq = [0.4;0.6;0.9;0.7;0.3;0.8;0.2;0.4;0.4;0.6;0.2;0.6];
```

Determine whether each point lies inside or on the edge of the polygon area. Also determine whether any of the points lie on the edge of the polygon area.

```
[in,on] = inpolygon(xq,yq,xv,yv);
```

Determine the number of points lying inside or on the edge of the polygon area.

```
numel(xq(in))
```

```
ans = 8
```

Determine the number of points lying on the edge of the polygon area.

```
numel(xq(on))
```

```
ans = 2
```

Determine the number of points lying outside the polygon area (not inside or on the edge).

```
numel(xq(~in))
```

```
ans = 4
```

Plot the polygon and the points. Display the points strictly inside the polygon with a red plus. Display the points on the edge with a black asterisk. Display the points outside the polygon with a blue circle.

```
figure

plot(xv,yv) % polygon

hold on
plot(xq(in&~on),yq(in&~on),'r+') % points strictly inside
plot(xq(on),yq(on),'k*') % points on edge
plot(xq(~in),yq(~in),'bo') % points outside
hold off
```

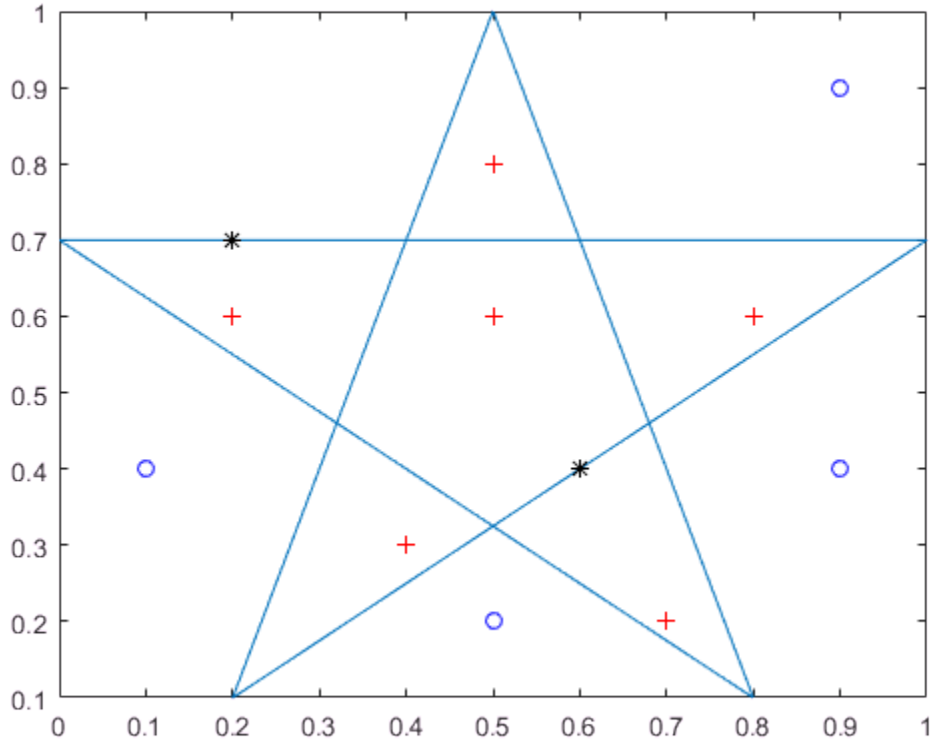

Six points lie inside the polygon. Two points lie on the edge of the polygon. Four points lie outside the polygon.

Input Arguments

xq — x-coordinates of query points

scalar | vector | matrix | multidimensional array

x-coordinates of query points, specified as a scalar, vector, matrix, or multidimensional array.

The size of `xq` must match the size of `yq`.

Data Types: `double` | `single`

`yq` — y-coordinates of query points

scalar | vector | matrix | multidimensional array

y-coordinates of query points, specified as a scalar, vector, matrix, or multidimensional array.

The size of `yq` must match the size of `xq`.

Data Types: `double` | `single`

`xv` — x-coordinates of polygon vertices

vector

x-coordinates of polygon vertices, specified as a vector.

The size of `xv` must match the size of `yv`.

To specify vertices of multiply connected or disjoint polygons, separate the coordinates for distinct loops with `NaN`. Additionally for multiply connected polygons, you must orient the vertices for external and internal loops in opposite directions.

The polygon cannot be self-intersecting and multiply connected due to the ambiguity associated with self-intersections and loop orientations.

Data Types: `double` | `single`

`yv` — y-coordinates of polygon vertices

vector

y-coordinates of polygon vertices, specified as a vector.

The size of `yv` must match the size of `xv`.

To specify vertices of multiply connected or disjoint polygons, separate the coordinates for distinct loops with `NaN`. Additionally for multiply connected polygons, you must orient the vertices for external and internal loops in opposite directions.

The polygon cannot be self-intersecting and multiply connected due to the ambiguity associated with self-intersections and loop orientations.

Data Types: `double` | `single`

Output Arguments

`in` — Indicator for points inside or on edge of polygon area

logical array

Indicator for the points inside or on the edge of the polygon area, returned as a logical array. `in` is the same size as `xq` and `yq`.

- A logical `1` (`true`) indicates that the corresponding query point is inside the polygonal region or on the edge of the polygon boundary.
- A logical `0` (`false`) indicates that the corresponding query point is outside the polygonal region.

Therefore, you can use `in` to index into `xq` and `yq` to identify query points of interest.

`xq(in)`, `yq(in)`	Query points inside or on the edge of the polygon area
`xq(~in)`, `yq(~in)`	Query points outside the polygonal region

`on` — Indicator for points on edge of polygon area

logical array

Indicator for the points on the edge of the polygon area, returned as a logical array. `on` is the same size as `xq` and `yq`.

- A logical `1` (`true`) indicates that the corresponding query point is on the polygon boundary.
- A logical `0` (`false`) indicates that the corresponding query point is inside or outside the polygon boundary.

Therefore, you can use `on` and `in` to index into `xq` and `yq` identify query points of interest.

`xq(on)`, `yq(on)`	Query points on the polygon boundary
`xq(~on)`, `yq(~on)`	Query points inside or outside the polygon boundary
`xq(in&~on)`, `yq(in&~on)`	Query points strictly inside the polygonal region

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Supports single-precision and double-precision inputs, but uses double-precision arithmetic even if all inputs are single-precision.

See Also

See Also

`delaunay`

Introduced before R2006a

input

Request user input

Syntax

```
x = input(prompt)
str = input(prompt,'s')
```

Description

`x = input(prompt)` displays the text in `prompt` and waits for the user to input a value and press the **Return** key. The user can enter expressions, like `pi/4` or `rand(3)`, and can use variables in the workspace.

- If the user presses the **Return** key without entering anything, then `input` returns an empty matrix.
- If the user enters an invalid expression at the prompt, then MATLAB displays the relevant error message, and then redisplays the prompt.

`str = input(prompt,'s')` returns the entered text, without evaluating the input as an expression.

Examples

Request Numeric Input or Expression

Request a numeric input, and then multiply the input by 10.

```
prompt = 'What is the original value? ';
x = input(prompt)
y = x*10
```

At the prompt, enter a numeric value or array, such as `42`.

```
x =
    42
```

```
y =
   420
```

The `input` function also accepts expressions. For example, rerun the code.

```
prompt = 'What is the original value? ';
x = input(prompt)
y = x*10
```

At the prompt, enter `magic(3)`.

```
x =
     8     1     6
     3     5     7
     4     9     2

y =
    80    10    60
    30    50    70
    40    90    20
```

Request Unprocessed Text Input

Request a simple text response that requires no evaluation.

```
prompt = 'Do you want more? Y/N [Y]: ';
str = input(prompt,'s');
if isempty(str)
    str = 'Y';
end
```

The `input` function returns the text exactly as typed. If the input is empty, this code assigns a default value, `'Y'`, to `str`.

Input Arguments

`prompt` — Text displayed to the user

character vector

Text displayed to the user, specified as a character vector.

To create a prompt that spans several lines, use `'\n'` to indicate each new line. To include a backslash (`'\'`) in the prompt, use `'\\'`.

Output Arguments

`x` — Result calculated from input
array

Result calculated from input, returned as an array. The type and dimensions of the array depend upon the response to the prompt.

`str` — Exact text of input
character vector

Exact text of the input, returned as a character vector.

See Also

See Also

`ginput` | `inputdlg` | `keyboard` | `menu` | `uicontrol`

Introduced before R2006a

inputdlg

Create dialog box that gathers user input

Syntax

```
answer = inputdlg(prompt)
answer = inputdlg(prompt,dlg_title)
answer = inputdlg(prompt,dlg_title,num_lines)
answer = inputdlg(prompt,dlg_title,num_lines,defAns)
answer = inputdlg(prompt,dlg_title,num_lines,defAns,options)
```

Description

`answer = inputdlg(prompt)` creates a modal dialog box and returns user input for multiple prompts. `prompt` is a cell array containing the text prompt.

Note A modal dialog box prevents the user from interacting with other windows before responding. For more information, see `WindowStyle` in Figure Properties.

`answer = inputdlg(prompt,dlg_title)` `dlg_title` specifies a title for the dialog box.

`answer = inputdlg(prompt,dlg_title,num_lines)` `num_lines` specifies the number of lines for each user-entered value. `num_lines` can be a scalar, column vector, or a m x 2 array.

- If `num_lines` is a scalar, it applies to all prompts.
- If `num_lines` is a column vector, each element specifies the number of lines of input for a prompt.
- If `num_lines` is an array, it must be size m-by-2, where m is the number of prompts on the dialog box. Each row refers to a prompt. The first column specifies the number of lines of input for a prompt. The second column specifies the width of the field in characters.

`answer = inputdlg(prompt,dlg_title,num_lines,defAns)` `defAns` specifies the default value to display for each prompt. `defAns` must contain the same number of elements as `prompt` and all elements must be of type `char`.

`answer = inputdlg(prompt,dlg_title,num_lines,defAns,options)` If `options` is `'on'`, then the dialog is resizable in the horizontal direction. If options is a structure, the fields shown in the following table are recognized:

Field	Description
`Resize`	Can be `'on'` or `'off'` (default). If `'on'`, the window is resizable horizontally.
`WindowStyle`	Can be either `'normal'` or `'modal'` (default).
`Interpreter`	Can be either `'none'` (default) or `'tex'`. If the value is `'tex'`, the prompt is rendered using TeX.

If the user clicks the **Cancel** button to close an `inputdlg` box, the dialog returns an empty cell array:

```
answer =
     {}
```

Examples

Example 1

Create a dialog box to input an integer and colormap name. Allow one line for each value.

```
prompt = {'Enter matrix size:','Enter colormap name:'};
dlg_title = 'Input';
num_lines = 1;
defaultans = {'20','hsv'};
answer = inputdlg(prompt,dlg_title,num_lines,defaultans);
```



Example 2

Create a dialog box named to accept space-separated numbers. MATLAB stores the input as characters, so convert the characters to numbers using `str2num`.

```
x = inputdlg('Enter space-separated numbers:',...
             'Sample', [1 50]);
data = str2num(x{:});
```

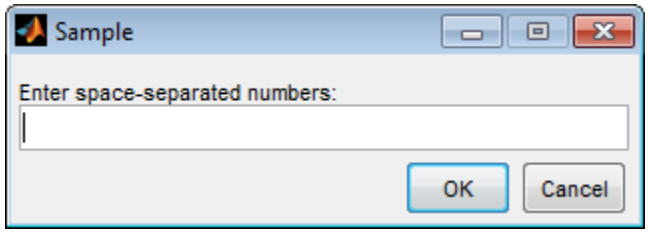

Example 3

Create a dialog box to display input fields of different widths.

```
x = inputdlg({'Name','Telephone','Account'},...
             'Customer', [1 50; 1 12; 1 7]);
```

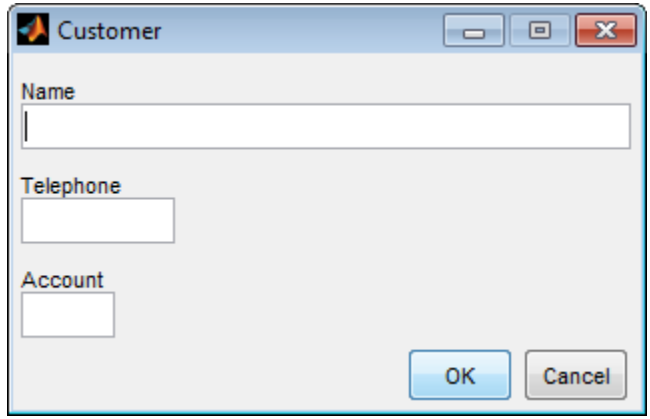

Example 4

Create a dialog box, specifying a value in the options structure. In this case, the options structure specifies TeX to be the interpreter.

```
prompt={'Enter a value of \theta (in degrees)'};
name = 'Theta Value';
defaultans = {'30'};
options.Interpreter = 'tex';
answer = inputdlg(prompt,name,[1 40],defaultans,options);
```

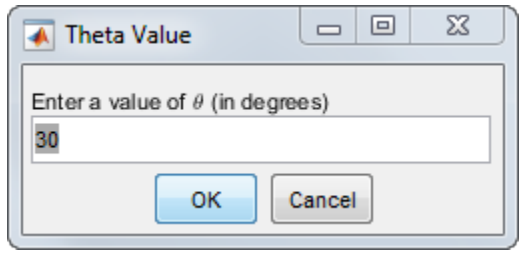

Tips

`inputdlg` uses the `uiwait` function to suspend execution until the user responds.

The returned variable `answer` is a cell array containing one answer per text entry field, starting from the top of the dialog box.

To convert a member of the cell array to a number, use `str2num`. To do this, you can add the following code to the end of any of the examples below:

```
% Use curly bracket for subscript
[val status] = str2num(answer{1});
if ~status
    % Handle empty value returned
    % for unsuccessful conversion
    % ...
end
% val is a scalar or matrix converted from the first input
```

Users can enter scalar or vector values into `inputdlg` fields. Use the `str2num` function to convert space- and comma-delimited values into row vectors, and semicolon-delimited values into column vectors. For example, if `answer{1}` contains `'1 2 3;4 -5 6+7i'`, the conversion produces:

```
val = str2num(answer{1})
val =
   1.0000     2.0000     3.0000
   4.0000    -5.0000     6.0000 + 7.0000i
```

See Also

`dialog` | `errordlg` | `helpdlg` | `listdlg` | `msgbox` | `questdlg` | `warndlg` | `input` | `figure` | `str2num` | `uiwait` | `uiresume`

Introduced before R2006a

inputname

Variable name of function input

Syntax

```
s = inputname(argNumber)
```

Description

`s = inputname(argNumber)` returns the workspace variable name, `s`, corresponding to the argument number `argNumber`.

You cannot call `inputname` from the MATLAB command prompt or in a script you call from the command prompt.

Examples

Display Variable Name of Function Input

Create the following function in a file, `myfun.m`, in your current working folder.

```
function myfun(a,b)
s = inputname(1);
disp(['First calling variable is ''' s '''.'])
end
```

Call the function at the command prompt using the variables `x` and `y`.

```
x = 5;
y = 3;
myfun(x,y)
```

```
First calling variable is 'x'.
```

Call the function using values instead of variables. The `inputname` function returns an empty `char` array because its input does not have a name.

```
myfun(5,3)
```

```
First calling variable is ''.
```

Display All Calling Variable Names

Create the following function in a file, `myfun2.m`, in your current working folder.

```
function myfun2(a,b,c)
for m = 1:nargin
    disp(['Calling variable ' num2str(m) ' is ''' inputname(m) '''.'])
end
```

Call the function at the command prompt.

```
x = {'hello','goodbye'};
y = struct('a',42,'b',78);
z = rand(4);
```

```
myfun2(x,y,z)
```

```
Calling variable 1 is 'x'.
Calling variable 2 is 'y'.
Calling variable 3 is 'z'.
```

Call the function using a field of `y`. Because the input argument contains dot indexing, the `inputname` function returns an empty `char` array for the second variable name and all subsequent variable names.

```
myfun2(x,y.a,z)
```

```
Calling variable 1 is 'x'.
Calling variable 2 is ''.
Calling variable 3 is ''.
```

Call the function using the second cell of `x`. Because the input argument contains cell indexing, the `inputname` function returns an empty `char` array for the first variable name and all subsequent variable names.

```
myfun2(x{2},y,z)
```

```
Calling variable 1 is ''.
```

```
Calling variable 2 is ''.
Calling variable 3 is ''.
```

Input Arguments

argNumber — Number of function input argument

scalar, real, positive integer value

Number of function input argument, specified as a scalar, real, positive integer value. If `argNumber` exceeds the number of input arguments passed into the function, MATLAB throws an error.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

s — Workspace variable name

character vector

Workspace variable name, returned as a character vector. If the input argument has no name, the `inputname` function returns an empty character array (`''`). For example, an input argument has no name if it is a number, an expression, or an indexing expression instead of a variable.

If an input argument to the function that calls `inputname` contains cell or dot indexing, `inputname` returns an empty character array for that variable and subsequent variables. Extracting elements from a cell array or a field from a structure yields a comma-separated list. A comma-separated list causes the location of any input that follows to be dynamic. Therefore, `inputname` returns `''` for the argument that produced the list and the arguments that follow.

Tips

- `inputname` is a convenient way to communicate the name of an input variable to a function. For example, a function checks the data types of inputs and, if it finds an incorrect type, displays the name of the variable from your workspace.

- Avoid using `inputname` in the critical path of code or to obtain variable names to be used with commands such as `eval`, `evalin`, and `assignin`. This use of `inputname` can lead to code that is difficult to maintain.
- `inputname` returns an error if it is called inside an overloaded `subsref`, `subsasgn`, `subsindex`, `numel`, or property set or get method.
- If the function that calls `inputname` is not called from a MATLAB code file, `inputname` walks up the stack until it finds a call from MATLAB code and returns the names it finds there. For example, this behavior occurs if `inputname` is called from a built-in function or a MEX function.

  Consider the following code in which the built-in `arrayfun` function calls `inputname` via a function handle.

  ```
  fn=@(x) inputname(x);
  a=1:4;
  arrayfun(fn,a,'uniformoutput',false)
  ```

  ```
  ans =

      'fn'    'a'    ''    ''
  ```

  The `inputname` function walks up the stack until it finds a call from MATLAB code. In this case, the MATLAB code is the base workspace, and `inputname` returns variable names from the base workspace

See Also

See Also

`nargin` | `narginchk` | `nargout`

Introduced before R2006a

inputParser class

Parse function inputs

Description

The `inputParser` object allows you to manage inputs to a function by creating an input scheme. To check the input, you can define validation functions for required arguments, optional arguments, and name-value pair arguments. Optionally, you can set properties to adjust the parsing behavior, such as handling case sensitivity, structure array inputs, and inputs that are not in the input scheme.

After calling the `parse` method to parse the inputs, the `inputParser` saves names and values of inputs that match the input scheme (stored in `Results`), names of inputs that are not passed to the function and, therefore, are assigned default values (stored in `UsingDefaults`), and names and values of inputs that do not match the input scheme (stored in `Unmatched`).

Construction

`p = inputParser` creates `inputParser` object `p`.

Properties

`CaseSensitive`

Scalar logical value that indicates whether to match case when checking argument names.

Possible values:

`false` (0)	Names are not sensitive to case: `'a'` matches `'A'`.
`true` (1)	Names are case sensitive: `'a'` does not match `'A'`.

Default: `false`

`FunctionName`

Character vector that specifies the name of the function to include in error messages. By specifying the `FunctionName`, the `parse` method of the `inputParser` will throw error messages as if it were that function. This allows the error to be attributed to the correct function and allows easy access to function documentation through the error message.

Default: The default value is an empty character vector, `''`.

`KeepUnmatched`

Scalar logical value that indicates how to handle parameter name and value inputs that are not in the input scheme.

Possible values:

`false` (0)	Throw an error whenever inputs are not in the scheme.
`true` (1)	Store the parameter names and values of unmatched inputs in the `Unmatched` property of the `inputParser` object, and suppress the error.

Default: `false`

`PartialMatching`

Scalar logical value that indicates whether partial matching of parameter names will be accepted. Partial parameter matching is supported by the `addParameter` method. If the value of `StructExpand` is `true`, then `PartialMatching` is not supported for structure field names corresponding to input parameter names.

Possible values:

`true` (1)	Inputs that are leading substrings of parameter names will be accepted and the value matched to that parameter. If there are multiple possible matches to the input, MATLAB throws an error.

Note: If `PartialMatching` and `KeepUnmatched` are both `true`, MATLAB does not throw an error. Instead, the

	ambiguous parameter name is stored in the `Unmatched` property.
`false` (0)	Input names are required to match a parameter name exactly (with respect to the `CaseSensitive` property.)

Default: `true`

`StructExpand`

Scalar logical value that specifies whether to interpret a structure array as a single input or as a set of parameter name and value pairs.

`true` (1)	Expand structures into separate inputs. Each field name corresponds to an input parameter name.
`false` (0)	Regard a structure array as a single input argument.

Default: `true`

Read Only Properties

`Parameters`

Cell array of character vectors that contains the names of arguments currently defined in the input scheme.

Each method that adds an input argument to the scheme (`addRequired`, `addOptional`, `addParameter`) updates the `Parameters` property.

`Results`

Structure containing names and values of inputs that match the function input scheme, populated by the `parse` method.

Each field of the `Results` structure corresponds to the name of an input.

`Unmatched`

Structure array containing the names and values of inputs that do not match the function input scheme, populated by the `parse` method.

If `KeepUnmatched` is `false` (default) or all inputs match the scheme, then `Unmatched` is a 1-by-1 structure with no fields. Otherwise, each field of the structure corresponds to the name of an input that did not match the scheme.

`UsingDefaults`

Cell array of character vectors containing the names of inputs not passed explicitly to the function and assigned default values, populated by the `parse` method.

Methods

addOptional	Add optional positional argument to input parser scheme
addParameter	Add optional parameter name-value pair argument to input parser scheme
addParamValue	(Not recommended) Add parameter name and value argument to Input Parser scheme
addRequired	Add required positional argument to input parser scheme
parse	Parse function inputs

You can define your scheme by calling `addRequired`, `addOptional`, and `addParameter` in any order, but when you call your function that uses the input parser, you should pass in required inputs first, followed by any optional positional inputs, and, finally, any name-value pairs.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

The `copy` method creates another scheme with the same properties as an existing `inputParser` object:

```
pNew = copy(pOld);
```

Examples

Input Validation

Check the validity of required and optional function inputs.

Create a custom function with required and optional inputs in the file `findArea.m`.

```
function a = findArea(width,varargin)
   p = inputParser;
   defaultHeight = 1;
   defaultUnits = 'inches';
   defaultShape = 'rectangle';
   expectedShapes = {'square','rectangle','parallelogram'};

   addRequired(p,'width',@isnumeric);
   addOptional(p,'height',defaultHeight,@isnumeric);
   addParameter(p,'units',defaultUnits);
   addParameter(p,'shape',defaultShape,...
                 @(x) any(validatestring(x,expectedShapes)));

   parse(p,width,varargin{:});
   a = p.Results.width .* p.Results.height;
```

The input parser checks whether `width` and `height` are numeric, and whether the `shape` matches a character vector in the `expectedShapes` cell array. `@` indicates a function handle, and the syntax `@(x)` creates an anonymous function with input `x`.

Call the function with inputs that do not match the scheme. For example, specify a nonnumeric value for the `width` input:

```
findArea('text')
```

```
Error using findArea (line 14)
The value of 'width' is invalid. It must satisfy the function: isnumeric.
```

Specify an unsupported value for `shape`:

```
findArea(4,'shape','circle')
```

```
Error using findArea (line 14)
The value of 'shape' is invalid. Expected input to match one of these values:

'square', 'rectangle', 'parallelogram'
```

```
The input, 'circle', did not match any of the valid values.
```

Extra Parameter Value Inputs

Store parameter name and value inputs that are not in the input scheme instead of throwing an error.

```
default = 0;
value = 1;

p = inputParser;
p.KeepUnmatched = true;
addOptional(p,'expectedInputName',default)
parse(p,'extraInput',value);
```

View the unmatched parameter name and value:

```
p.Unmatched
```

```
ans = struct with fields:
    extraInput: 1
```

Case Sensitivity

Enforce case sensitivity when checking function inputs.

```
p = inputParser;
p.CaseSensitive = true;
defaultValue = 0;
addParameter(p,'InputName',defaultValue)

parse(p,'inputname',10)
```

```
'inputname' is not a recognized parameter. For a list of valid name-value pair arguments, see the documentation for this f
```

Structure Array Inputs

Parse structure array inputs with the `StructExpand` property set to `true` (default) or `false`.

Expand a structure array input into parameter name and value pairs using the default `true` value of the `StructExpand` property.

```
s.input1 = 10;
```

```
s.input2 = 20;
default = 0;

p = inputParser;
addParameter(p,'input1',default)
addParameter(p,'input2',default)
parse(p,s)

p.Results
```

```
ans = struct with fields:
    input1: 10
    input2: 20
```

Explicitly specifying a parameter name and value pair overrides values in the structure.

```
parse(p,s,'input2',300)
p.Results
```

```
ans = struct with fields:
    input1: 10
    input2: 300
```

Accept a structure array input as a single argument by setting the `StructExpand` property to `false`.

```
s2.first = 1;
s2.random = rand(3,4,2);
s2.mytext = 'some text';

p = inputParser;
p.StructExpand = false;
addRequired(p,'structInput')
parse(p,s2)

results = p.Results
```

```
results = struct with fields:
    structInput: [1×1 struct]
```

```
fieldList = fieldnames(p.Results.structInput)
```

```
fieldList = 3×1 cell array
```

```
    'first'
    'random'
    'mytext'
```

Parse Inputs Using `validateattributes`

Create a function that parses information about people and, if parsing passes, adds the information to a cell array.

Create a function, `addPerson`, that sets up an `inputParser` scheme using `validateAttributes`. The function should accept the list of people, modify the list if necessary and return the list. Use a persistent `inputParser` to avoid construction of a new object with every function call. If this is the first call to the function, add a titles row to the cell array.

```
function mlist = addPerson(mlist,varargin)

persistent p
if isempty(p)
    p = inputParser;
    p.FunctionName = 'addPerson';
    addRequired(p,'name',@(x)validateattributes(x,{'char'},...
        {'nonempty'}))
    addRequired(p,'id',@(x)validateattributes(x,{'numeric'},...
        {'nonempty','integer','positive'}))
    addOptional(p,'birthyear',9999,@(x)validateattributes(x,...
        {'numeric'},{'nonempty'}))
    addParameter(p,'nickname','-',@(x)validateattributes(x,...
        {'char'},{'nonempty'}))
    addParameter(p,'favColor','-',@(x)validateattributes(x,...
        {'char'},{'nonempty'}))
end

parse(p,varargin{:})

if isempty(mlist)
    mlist = fieldnames(p.Results)';
end
mlist = [mlist; struct2cell(p.Results)'];

end
```

Create an empty list, and add a person to it.

```
pList = {};
pList = addPerson(pList,78,'Joe');
```

```
Error using addPerson
The value of 'name' is invalid. Expected input to be one of these types:

char

Instead its type was double.
```

```
Error in addPerson (line 17)
parse(p,mlist,name,id,varargin{:});
```

The parsing failed because the function received the inputs in the incorrect order and tried to assign `name` a value of `78`. This entry was not added to `pList`.

Add several more people to the list.

```
pList = addPerson(pList,'Joe',78);
pList = addPerson(pList,'Mary',3,1942,'favColor','red');
pList = addPerson(pList,'James',182,1970,'nickname','Jimmy')
```

```
pList =

    'birthyear'    'favColor'    'id'     'name'     'nickname'
    [     9999]    '-'           [ 78]    'Joe'      '-'
    [     1942]    'red'         [  3]    'Mary'     '-'
    [     1970]    '-'           [182]    'James'    'Jimmy'
```

See Also

See Also

`nargin` | `narginchk` | `validateattributes` | `validatestring` | `varargin`

Topics

"Input Parser Validation Functions"

Introduced in R2007a

insertAfter

Insert string after specified substring

Syntax

```
newStr = insertAfter(str,startStr,newText)
newStr = insertAfter(str,startPos,newText)
```

Description

`newStr = insertAfter(str,startStr,newText)` inserts `newText` into `str` after the substring specified by `startStr` and returns the result as `newStr`. If `startStr` occurs multiple times in `str`, then `insertAfter` inserts text after every occurrence of `startStr`.

If `str` is a string array or a cell array of character vectors, then `insertAfter` inserts `newText` into each element of `str`. The output argument `newStr` has the same data type as `str`.

`newStr = insertAfter(str,startPos,newText)` inserts the text specified by `newText` into `str` after the position specified by `startPos`.

Examples

Insert Text After Substring

Create string arrays and insert text after substrings.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "The quick fox"
```

```
str =
"The quick fox"
```

Insert text after the substring `"quick"`.

```
newStr = insertAfter(str,"quick"," brown")
```

```
newStr =
"The quick brown fox"
```

Insert substrings into each element of a string array. When you specify different substrings as positions, they must be contained in a string array or a cell array that is the same size as `str`.

```
str = ["The quick fox jumps";"over the dog"]
```

```
str = 2×1 string array
    "The quick fox jumps"
    "over the dog"
```

```
newStr = insertAfter(str,["quick";"the"],[" brown";" lazy"])
```

```
newStr = 2×1 string array
    "The quick brown fox jumps"
    "over the lazy dog"
```

Insert Substring After Position

Create string arrays and specify positions to insert substrings.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "James Maxwell"
```

```
str =
"James Maxwell"
```

Insert a substring after the fifth character.

```
newStr = insertAfter(str,5," Clerk")
```

```
newStr =
"James Clerk Maxwell"
```

Insert substrings into each element of a string array. When you specify different positions with numeric arrays, they must be the same size as the input string array.

```
str = ["James Maxwell";"Carl Gauss"]
```

```
str = 2×1 string array
    "James Maxwell"
    "Carl Gauss"
```

```
newStr = insertAfter(str,[5;4],[" Clerk";" Friedrich"])
```

```
newStr = 2×1 string array
    "James Clerk Maxwell"
    "Carl Friedrich Gauss"
```

Insert Text After Position in Character Vector

Create a character vector and insert text after a specified position.

```
chr = 'mushrooms and onions'
```

```
chr =
'mushrooms and onions'
```

Insert text after the ninth position.

```
newChr = insertAfter(chr,9,', peppers,')
```

```
newChr =
'mushrooms, peppers, and onions'
```

Insert text after a substring.

```
newChr = insertAfter(chr,'mushrooms',', peppers,')
```

```
newChr =
'mushrooms, peppers, and onions'
```

- "Create String Arrays"
- "Search and Replace Text"
- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`startStr` — Substring to insert text after

string array | character vector | cell array of character vectors

Substring to insert text after, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or a cell array of character vectors, then `startStr` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Data Types: `string` | `char` | `cell`

`startPos` — Start position to insert text after

numeric array

Start position to insert text after, specified as a numeric array.

If `str` is a string array or a cell array of character vectors, then `startPos` can be a numeric scalar or a numeric array of the same size as `str`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`newText` — Text to insert

string array | character vector | cell array of character vectors

Text to insert, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or a cell array of character vectors, then `newText` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Data Types: `string` | `char` | `cell`

Output Arguments

`newStr` — Output text

string array | character vector | cell array of character vectors

Output text, returned as a string array, a character vector, or a cell array of character vectors. `str` and `newStr` have the same data type.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`erase` | `eraseBetween` | `extractAfter` | `extractBefore` | `insertBefore` | `join` | `plus` | `replace` | `split`

Topics

“Create String Arrays”
“Search and Replace Text”
“Test for Empty Strings and Missing Values”

Introduced in R2016b

insertBefore

Insert string before specified substring

Syntax

```
newStr = insertBefore(str,endStr,newText)
newStr = insertBefore(str,endPos,newText)
```

Description

`newStr = insertBefore(str,endStr,newText)` inserts `newText` into `str` before the substring specified by `endStr` and returns the result as `newStr`. If `endStr` occurs multiple times in `str`, then `insertBefore` inserts text before every occurrence of `endStr`.

If `str` is a string array or a cell array of character vectors, then `insertBefore` inserts `newText` into each element of `str`. The output argument `newStr` has the same data type as `str`.

`newStr = insertBefore(str,endPos,newText)` inserts the text specified by `newText` into `str` before the position specified by `endPos`.

Examples

Insert Text Before Substring

Create string arrays and insert text before substrings.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "bread cheese wine"
```

```
str =
"bread cheese wine"
```

Insert a comma before each space character in the string. The `insertBefore` function inserts text before each matching substring.

```
newStr = insertBefore(str," ",",")
```

```
newStr =
"bread, cheese, wine"
```

Insert substrings into each element of a string array. When you specify different substrings as positions, they must be contained in a string array or a cell array that is the same size as `str`.

```
str = ["The quick fox jumps";"over the dog"]
```

```
str = 2×1 string array
    "The quick fox jumps"
    "over the dog"
```

```
newStr = insertBefore(str,[" fox";" dog"],[" brown";" lazy"])
```

```
newStr = 2×1 string array
    "The quick brown fox jumps"
    "over the lazy dog"
```

Insert Substring Before Position

Create string arrays and specify positions to insert substrings.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "James Maxwell"
```

```
str =
"James Maxwell"
```

Insert a substring before the seventh character.

```
newStr = insertBefore(str,7,"Clerk ")
```

```
newStr =
```

```
"James Clerk Maxwell"
```

Insert substrings into each element of a string array. When you specify different positions with numeric arrays, they must be the same size as the input string array.

```
str = ["James Maxwell";"Carl Gauss"]
```

```
str = 2×1 string array
    "James Maxwell"
    "Carl Gauss"
```

```
newStr = insertBefore(str,[7;6],["Clerk ";"Friedrich "])
```

```
newStr = 2×1 string array
    "James Clerk Maxwell"
    "Carl Friedrich Gauss"
```

Insert Text Before Position in Character Vector

Create a character vector and insert text before a specified position.

```
chr = 'mushrooms and onions'
```

```
chr =
'mushrooms and onions'
```

Insert text before the tenth position.

```
newChr = insertBefore(chr,10,', peppers,')
```

```
newChr =
'mushrooms, peppers, and onions'
```

Insert text before a substring.

```
newChr = insertBefore(chr,' and',', peppers,')
```

```
newChr =
'mushrooms, peppers, and onions'
```

- “Create String Arrays”
- “Search and Replace Text”

- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`endStr` — Substring to insert text before

string array | character vector | cell array of character vectors

Substring to insert text before, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or a cell array of character vectors, then `endStr` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Data Types: `string` | `char` | `cell`

`endPos` — End position to insert text before

numeric array

End position to insert text before, specified as a numeric array.

If `str` is a string array or a cell array of character vectors, then `endPos` can be a numeric scalar or a numeric array of the same size as `str`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`newText` — Text to insert

string array | character vector | cell array of character vectors

Text to insert, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or a cell array of character vectors, then `newText` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Data Types: `string` | `char` | `cell`

Output Arguments

`newStr` — Output text
string array | character vector | cell array of character vectors

Output text, returned as a string array, a character vector, or a cell array of character vectors. `str` and `newStr` have the same data type.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

See Also

See Also
`erase` | `eraseBetween` | `extractAfter` | `extractBefore` | `insertAfter` | `join` | `split`

Topics
"Create String Arrays"
"Search and Replace Text"
"Test for Empty Strings and Missing Values"

Introduced in R2016b

inspect

Open Property Inspector

Syntax

```
inspect
inspect(h)
inspect([h1,h2,...])
inspect -close
```

Description

`inspect` opens the Property Inspector. Use the Property Inspector to display and modify properties of an object. Select an object in a figure window or the Layout Editor. To select an object in a figure window, plot edit mode must be on. If you do not select an object, then the Property Inspector is blank.

`inspect(h)` displays the properties for the object, `h`, where `h` can be most handle objects. For example, specify `h` as a MATLAB graphics object or a Simulink object.

`inspect([h1,h2,...])` displays properties that objects `h1` and `h2` have in common. If there are no such properties, `inspect` displays a blank window. You can inspect and edit any number of objects, for example, objects returned by the `bar` function.

`inspect -close` closes the Property Inspector.

The Property Inspector has the following behaviors:

- Only one Property Inspector window is active at any given time; when you inspect a new object, its properties replace those of the object last inspected.
- When the Property Inspector is open and plot edit mode is on, clicking any object in the figure window displays the properties of that object (or set of objects) in the Property Inspector.
- When you select and inspect two or more objects of different types, the Property Inspector only shows the properties that all objects have in common.

- To change the value of any property, click on the property name shown at the left side of the window, and then enter the new value in the field at the right.

The Property Inspector provides two different views:

- List view — properties are ordered alphabetically (default); this is the only view available for annotation objects.
- Group view — properties are grouped under classified headings (MATLAB graphics objects only)

To view alphabetically, click the "AZ" Icon in the Property Inspector toolbar. To see properties in groups, click

the "++" icon . When properties are grouped, the "-" and "+" icons are enabled; click to expand all categories and click to collapse all categories. You can also expand and collapse individual categories by clicking on the "+" next to the category name. Some properties expand and collapse

---

Notes To see a complete description of any property, right-click on its name or value and select **What's This**; a help window opens that displays the reference page entry for it.

The Property Inspector displays most, but not all, properties of MATLAB graphics objects. For example, the `Parent` and `Children` properties are not shown.

`inspect h` displays a Property Inspector window that enables modification of the character vector `'h'`, not the object `h`.

If you modify properties at the MATLAB command line, you must refresh the Property Inspector window to see the change reflected there. Refresh the Property Inspector by reinvoking `inspect` on the object.

Examples

Example 1

Create a surface mesh plot and view its properties with the Property Inspector.

```
Z = peaks(30);
f = surf(Z);
inspect(f);
```

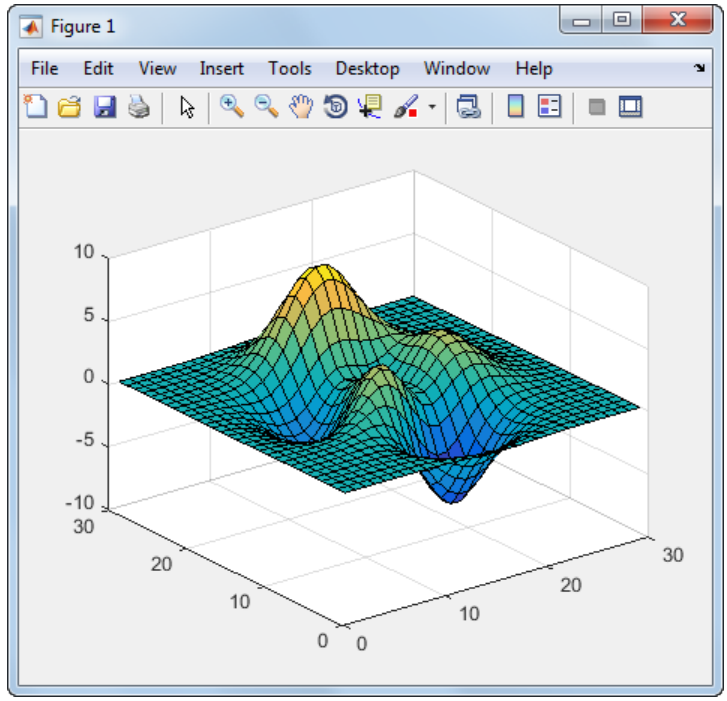

In the Property Inspector, change the `FaceAlpha` property from `1.0` to `0.4`. Setting this value in the Property Inspector is equivalent to the command, `f.FaceAlpha = 0.4`, which changes the transparency of the surface faces to 40%.

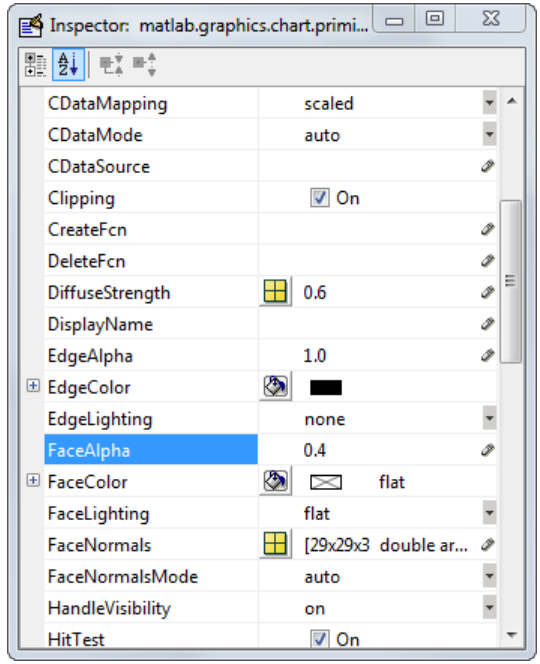
Inspector: matlab.graphics.chart.primi...
CDataMapping
scaled
CDataMode
auto
CDataSource
Clipping
On
CreateFcn
DeleteFcn
DiffuseStrength
0.6
DisplayName
EdgeAlpha
1.0
EdgeColor
EdgeLighting
none
FaceAlpha
0.4
FaceColor
flat
FaceLighting
flat
FaceNormals
[29x29x3 double ar...
FaceNormalsMode
auto
HandleVisibility
on
HitTest
On

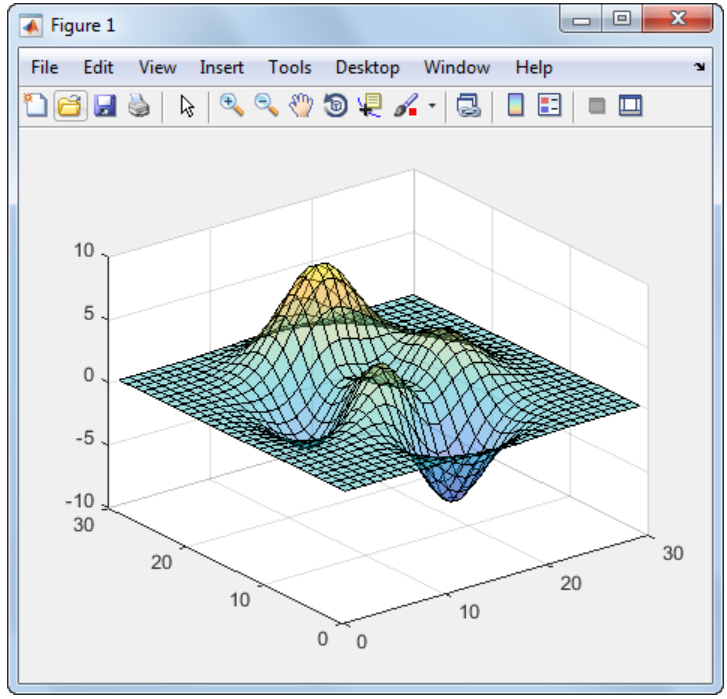

Example 2

Create a serial port object for `COM1` on a Windows platform and use the Property Inspector to peruse its properties:

```
s = serial('COM1');
inspect(s);
```

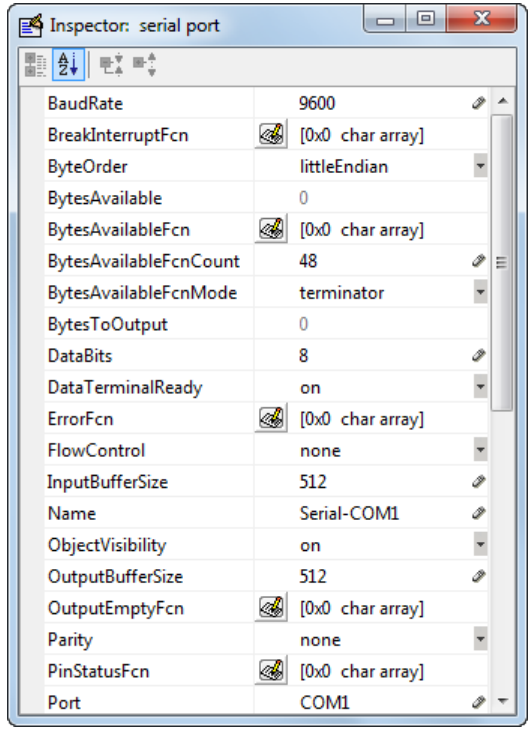

Because COM objects do not define property groupings, the Property Inspector enables only the alphabetical list view of COM object properties.

Example 3

Create a COM Excel server and open a Property Inspector window with `inspect`.

```
h = actxserver('excel.application');
inspect(h);
```

Scroll down until you see the `CalculationInterruptKey` property, which by default is `xlAnyKey`. Click on the down-arrow in the right margin of the Property Inspector, and then select `xlEscKey` from the drop-down menu.

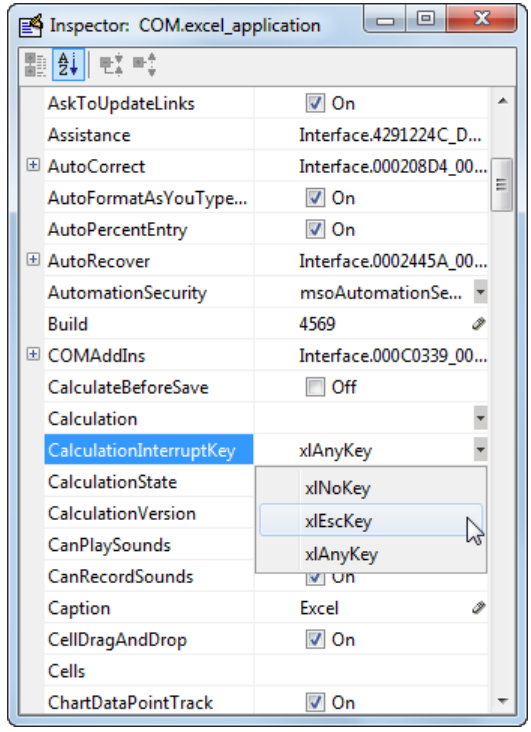

Check this property in the MATLAB Command Window using `get` to confirm that the property value changed.

```
get(h,'CalculationInterruptKey')
```

```
ans =
xlEscKey
```

See Also

See Also

`addproperty` | `deleteproperty` | `isprop`

Topics

"Access Property Values"

Introduced before R2006a

instrcallback

Event information when event occurs

Syntax

```
instrcallback(obj,event)
```

Description

`instrcallback(obj,event)` displays a message that contains the event type, `event`, the time the event occurred, and the name of the serial port object, `obj`, that caused the event to occur.

For error events, the error message is also displayed. For pin status events, the pin that changed value and its value are also displayed.

Examples

The following example creates the serial port object, `s`, on a Windows platform. It configures `s` to execute `instrcallback` when an output-empty event occurs. The event occurs after the `*IDN?` command is written to the instrument.

```
s = serial('COM1');
set(s,'OutputEmptyFcn',@instrcallback)
fopen(s)
fprintf(s,'*IDN?','async')
```

```
OutputEmpty event occurred at 08:37:49 for the object:
Serial-COM1.
```

Read the identification information from the input buffer and end the serial port session.

```
idn = fscanf(s);
fclose(s)
delete(s)
clear s
```

Tips

Use `instrcallback` as a template to create callback functions that suit your specific application needs.

Introduced before R2006a

instrfind

Read serial port objects from memory to MATLAB workspace

Syntax

```
out = instrfind
out = instrfind('PropertyName',PropertyValue,...)
out = instrfind(S)
out = instrfind(obj,'PropertyName',PropertyValue,...)
```

Description

`out = instrfind` returns all valid serial port objects as an array to `out`.

`out = instrfind('PropertyName',PropertyValue,...)` returns an array of serial port objects whose property names and property values match those specified.

`out = instrfind(S)` returns an array of serial port objects whose property names and property values match those defined in the structure `S`. The field names of `S` are the property names, while the field values are the associated property values.

`out = instrfind(obj,'PropertyName',PropertyValue,...)` restricts the search for matching property name/property value pairs to the serial port objects listed in `obj`.

Examples

Suppose you create the following two serial port objects on a Windows platform.

```
s1 = serial('COM1');
s2 = serial('COM2');
set(s2,'BaudRate',4800)
fopen([s1 s2])
```

You can use `instrfind` to return serial port objects based on property values.

```
out1 = instrfind('Port','COM1');
```

```
out2 = instrfind({'Port','BaudRate'},{'COM2',4800});
```

You can also use `instrfind` to return cleared serial port objects to the MATLAB workspace.

```
clear s1 s2
newobjs = instrfind
```

```
   Instrument Object Array
   Index:   Type:          Status:     Name:
   1        serial         open        Serial-COM1
   2        serial         open        Serial-COM2
```

To close both `s1` and `s2`

```
fclose(newobjs)
```

Tips

Refer to "Displaying Property Names and Property Values" for a list of serial port object properties that you can use with `instrfind`.

You must specify property values using the same format as the `get` function returns. For example, if `get` returns the `Name` property value as `MyObject`, `instrfind` will not find an object with a `Name` property value of `myobject`. However, this is not the case for properties that have a finite set of string values. For example, `instrfind` will find an object with a `Parity` property value of `Even` or `even`.

You can use property name/property value string pairs, structures, and cell array pairs in the same call to `instrfind`.

See Also

`clear` | `get`

Introduced before R2006a

instrfindall

Find visible and hidden serial port objects

Syntax

```
out = instrfindall
out = instrfindall('P1',V1,...)
out = instrfindall(s)
out = instrfindall(objs,'P1',V1,...)
```

Description

`out = instrfindall` finds all serial port objects, regardless of the value of the object's `ObjectVisibility` property. The object or objects are returned to `out`.

`out = instrfindall('P1',V1,...)` returns an array, `out`, of serial port objects whose property names and corresponding property values match those specified as arguments.

`out = instrfindall(s)` returns an array, `out`, of serial port objects whose property names and corresponding property values match those specified in the structure `s`, where the field names correspond to property names and the field values correspond to the current value of the respective property.

`out = instrfindall(objs,'P1',V1,...)` restricts the search for objects with matching property name/value pairs to the serial port objects listed in `objs`.

Note that you can use string property name/property value pairs, structures, and cell array property name/property value pairs in the same call to `instrfindall`.

Examples

Suppose you create the following serial port objects on a Windows platform:

```
s1 = serial('COM1');
s2 = serial('COM2');
```

```
set(s2,'ObjectVisibility','off')
```

Because object s2 has its ObjectVisibility set to 'off', it is not visible to commands like instrfind:

```
instrfind
```

```
   Serial Port Object : Serial-COM1
```

However, instrfindall finds all objects regardless of the value of ObjectVisibility:

```
instrfindall
```

```
 Instrument Object Array
 Index:   Type:          Status:     Name:
 1        serial         closed      Serial-COM1
 2        serial         closed      Serial-COM2
```

The following statements use instrfindall to return objects with specific property settings, which are passed as cell arrays:

```
props = {'PrimaryAddress','SecondaryAddress};
vals = {2,0};
obj = instrfindall(props,vals);
```

You can use instrfindall as an argument when you want to apply the command to all objects, visible and invisible. For example, the following statement makes all objects visible:

```
set(instrfindall,'ObjectVisibility','on')
```

Tips

instrfindall differs from instrfind in that it finds objects whose ObjectVisibility property is set to off.

Property values are case sensitive. You must specify property values using the same format as that returned by the get function. For example, if get returns the Name property value as 'MyObject', instrfindall will not find an object with a Name property value of 'myobject'. However, this is not the case for properties that have a finite set of string values. For example, instrfindall will find an object with a Parity property value of 'Even' or 'even'.

See Also

`get` | `instrfind` | `ObjectVisibility`

int2str

Convert integers to character array

Syntax

```
str = int2str(N)
```

Description

`str = int2str(N)` converts integers to a character array. The input `N` can be a single integer or a vector or matrix of integers. Noninteger inputs are rounded before conversion.

Examples

`int2str(2+3)` returns `'5'`.

One way to label a plot is

```
title(['case number ' int2str(n)])
```

For matrix or vector inputs, `int2str` returns a character array:

```
int2str(eye(3))
```

```
ans =

1  0  0
0  1  0
0  0  1
```

See Also

`fprintf` | `num2str` | `sprintf` | `cast`

Introduced before R2006a

int8

Convert to 8-bit signed integer

Syntax

```
intArray = int8(array)
```

Description

`intArray = int8(array)` converts the elements of an array into signed 8-bit (1-byte) integers of class `int8`.

Input Arguments

array

Array of any numeric class, such as `single` or `double`. If `array` is already of class `int8`, the `int8` function has no effect.

Output Arguments

intArray

Array of class `int8`. Values range from -2^7 to $2^7 - 1$.

The `int8` function maps any values in `array` that are outside the limit to the nearest endpoint. For example,

```
int8(2^7)   % 2^7 = 128
```

returns

```
ans =
    127
```

Examples

Convert a `double` array to `int8`:

```
mydata = int8(magic(10));
```

Tutorials

- "Integers"
- "Arithmetic Operations on Integer Classes"

Alternatives

When preallocating integer arrays, specify the class in the call to functions that support a class name input (such as `zeros`, `ones` or `eye`), rather than calling an integer conversion function. For example,

```
I = int8(zeros(100));     % Creates an intermediate array
```

is not as efficient as

```
I = zeros(100, 'int8');   % Preferred
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`double` | `single` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `intmax` | `intmin`

Topics

"Integers"
"Arithmetic Operations on Integer Classes"

Introduced before R2006a

int16

Convert to 16-bit signed integer

Syntax

```
intArray = int16(array)
```

Description

`intArray = int16(array)` converts the elements of an array into signed 16-bit (2-byte) integers of class `int16`.

Input Arguments

array

Array of any numeric class, such as `single` or `double`. If `array` is already of class `int16`, the `int16` function has no effect.

Output Arguments

intArray

Array of class `int16`. Values range from -2^{15} to $2^{15} - 1$.

The `int16` function maps any values in `array` that are outside the limit to the nearest endpoint. For example,

```
int16(2^15)   % 2^15 = 32768
```

returns

```
ans =
    32767
```

Examples

Convert a `double` array to `int16`:

```
mydata = int16(magic(100));
```

Tutorials

- "Integers"
- "Arithmetic Operations on Integer Classes"

Alternatives

When preallocating integer arrays, specify the class in the call to functions that support a class name input (such as `zeros`, `ones` or `eye`), rather than calling an integer conversion function. For example,

```
I = int16(zeros(100));     % Creates an intermediate array
```

is not as efficient as

```
I = zeros(100, 'int16');   % Preferred
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`double` | `single` | `int8` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `intmax` | `intmin`

Topics

"Integers"
"Arithmetic Operations on Integer Classes"

Introduced before R2006a

int32

Convert to 32-bit signed integer

Syntax

```
intArray = int32(array)
```

Description

`intArray = int32(array)` converts the elements of an array into signed 32-bit (4-byte) integers of class `int32`.

Input Arguments

array

Array of any numeric class, such as `single` or `double`. If `array` is already of class `int32`, the `int32` function has no effect.

Output Arguments

intArray

Array of class `int32`. Values range from -2^{31} to $2^{31} - 1$.

The `int32` function maps any values in `array` that are outside the limit to the nearest endpoint. For example,

```
int32(2^31)    % 2^31 = 2147483648
```

returns

```
ans =
    2147483647
```

Examples

Convert a `double` array to `int32`:

```
mydata = int32(magic(1000));
```

Tutorials

- "Integers"
- "Arithmetic Operations on Integer Classes"

Alternatives

When preallocating integer arrays, specify the class in the call to functions that support a class name input (such as `zeros`, `ones` or `eye`), rather than calling an integer conversion function. For example,

```
I = int32(zeros(100));     % Creates an intermediate array
```

is not as efficient as

```
I = zeros(100, 'int32');   % Preferred
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`double` | `single` | `int8` | `int16` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `intmax` | `intmin`

Topics

"Integers"
"Arithmetic Operations on Integer Classes"

Introduced before R2006a

int64

Convert to 64-bit signed integer

Syntax

```
intArray = int64(array)
```

Description

`intArray = int64(array)` converts the elements of an array into signed 64-bit (8-byte) integers of class `int64`.

Input Arguments

array

Array of any numeric class, such as `single` or `double`. If `array` is already of class `int64`, the `int64` function has no effect.

Output Arguments

intArray

Array of class `int64`. Values range from -2^{63} to $2^{63} - 1$.

The `int64` function maps any values in `array` that are outside the limit to the nearest endpoint. For example,

```
int64(2^63)   % 2^63 = 9223372036854775808
```

returns

```
ans =
```

```
9223372036854775807
```

Examples

Convert a literal value to `int64`:

```
x = int64(9007199254740993);
```

Tutorials

- "Integers"
- "Arithmetic Operations on Integer Classes"

Tips

Double-precision floating-point numbers have only 52 bits in the mantissa. Therefore, `double` values cannot represent all integers greater than 2^{53} correctly. Before performing arithmetic operations on values larger than 2^{53} in magnitude, convert the values to 64-bit integers. For example,

```
x = int64(2^53+1);     % Floating-point arithmetic, loses precision
```

is not as accurate as the 64-bit integer arithmetic operation:

```
x = int64(2^53) + 1;   % Preferred
```

Alternatives

When preallocating integer arrays, specify the class in the call to functions that support a class name input (such as `zeros`, `ones` or `eye`), rather than calling an integer conversion function. For example,

```
I = int64(zeros(100));     % Creates an intermediate array
```

is not as efficient as

```
I = zeros(100, 'int64');   % Preferred
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`double` | `single` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32` | `uint64` | `intmax` | `intmin`

Topics

"Integers"
"Arithmetic Operations on Integer Classes"

Introduced before R2006a

integral

Numerical integration

Syntax

```
q = integral(fun,xmin,xmax)
q = integral(fun,xmin,xmax,Name,Value)
```

Description

`q = integral(fun,xmin,xmax)` numerically integrates function `fun` from `xmin` to `xmax` using global adaptive quadrature and default error tolerances.

`q = integral(fun,xmin,xmax,Name,Value)` specifies additional options with one or more `Name,Value` pair arguments. For example, specify `'WayPoints'` followed by a vector of real or complex numbers to indicate specific points for the integrator to use.

Examples

Improper Integral

Create the function $f(x) = e^{-x^2}(\ln x)^2$.

```
fun = @(x) exp(-x.^2).*log(x).^2;
```

Evaluate the integral from `x=0` to `x=Inf`.

```
q = integral(fun,0,Inf)
```

```
q = 1.9475
```

Parameterized Function

Create the function $f(x) = 1/(x^3 - 2x - c)$ with one parameter, c.

```
fun = @(x,c) 1./(x.^3-2*x-c);
```

Evaluate the integral from `x=0` to `x=2` at `c=5`.

```
q = integral(@(x)fun(x,5),0,2)
```

```
q = -0.4605
```

Singularity at Lower Limit

Create the function $f(x) = \ln(x)$.

```
fun = @(x)log(x);
```

Evaluate the integral from `x=0` to `x=1` with the default error tolerances.

```
format long
q1 = integral(fun,0,1)
```

```
q1 =
  -1.000000010959678
```

Evaluate the integral again, specifying 12 decimal places of accuracy.

```
q2 = integral(fun,0,1,'RelTol',0,'AbsTol',1e-12)
```

```
q2 =
  -1.000000000000010
```

Complex Contour Integration Using Waypoints

Create the function $f(z) = 1/(2z - 1)$.

```
fun = @(z) 1./(2*z-1);
```

Integrate in the complex plane over the triangular path from `0` to `1+1i` to `1-1i` to `0` by specifying waypoints.

```
q = integral(fun,0,0,'Waypoints',[1+1i,1-1i])
```

```
q =
```

```
  -0.0000 - 3.1416i
```

Vector-Valued Function

Create the vector-valued function $f(x) = [\sin x, \sin 2x, \sin 3x, \sin 4x, \sin 5x]$ and integrate from `x=0` to `x=1`. Specify `'ArrayValued',true` to evaluate the integral of an array-valued or vector-valued function.

```
fun = @(x)sin((1:5)*x);
q = integral(fun,0,1,'ArrayValued',true)
```

```
q =

    0.4597    0.7081    0.6633    0.4134    0.1433
```

Improper Integral of Oscillatory Function

Create the function $f(x) = x^5 e^{-x} \sin x$.

```
fun = @(x)x.^5.*exp(-x).*sin(x);
```

Evaluate the integral from `x=0` to `x=Inf` , adjusting the absolute and relative tolerances.

```
format long
q = integral(fun,0,Inf,'RelTol',1e-8,'AbsTol',1e-13)
```

```
q =
 -14.999999999998364
```

- "Integration to Find Arc Length"
- "Complex Line Integrals"

Input Arguments

`fun` — Integrand
function handle

Integrand, specified as a function handle, which defines the function to be integrated from `xmin` to `xmax`.

For scalar-valued problems, the function `y = fun(x)` must accept a vector argument, `x`, and return a vector result, `y`. This generally means that `fun` must use array operators instead of matrix operators. For example, use `.*` (times) rather than `*` (mtimes). If you set the `'ArrayValued'` option to `true`, then `fun` must accept a scalar and return an array of fixed size.

`xmin` — Lower limit of *x*

real number | complex number

Lower limit of *x*, specified as a real (finite or infinite) scalar value or a complex (finite) scalar value. If either `xmin` or `xmax` are complex, then `integral` approximates the path integral from `xmin` to `xmax` over a straight line path.

Data Types: `double` | `single`
Complex Number Support: Yes

`xmax` — Upper limit of *x*

real number | complex number

Upper limit of *x*, specified as a real number (finite or infinite) or a complex number (finite). If either `xmin` or `xmax` are complex, `integral` approximates the path integral from `xmin` to `xmax` over a straight line path.

Data Types: `double` | `single`
Complex Number Support: Yes

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'AbsTol',1e-12` sets the absolute error tolerance to approximately 12 decimal places of accuracy.

`'AbsTol'` — Absolute error tolerance

nonnegative real number

Absolute error tolerance, specified as the comma-separated pair consisting of `'AbsTol'` and a nonnegative real number. `integral` uses the absolute error tolerance to limit an estimate of the absolute error, $|q - Q|$, where q is the computed value of the integral and Q is the (unknown) exact value. `integral` might provide more decimal places of precision if you decrease the absolute error tolerance. The default value is `1e-10`.

Note: `AbsTol` and `RelTol` work together. `integral` might satisfy the absolute error tolerance or the relative error tolerance, but not necessarily both. For more information on using these tolerances, see the "Tips" on page 1-5756 section.

Example: `'AbsTol',1e-12` sets the absolute error tolerance to approximately 12 decimal places of accuracy.

Data Types: `single` | `double`

`'RelTol'` — Relative error tolerance

nonnegative real number

Relative error tolerance, specified as the comma-separated pair consisting of `'RelTol'` and a nonnegative real number. `integral` uses the relative error tolerance to limit an estimate of the relative error, $|q - Q|/|Q|$, where q is the computed value of the integral and Q is the (unknown) exact value. `integral` might provide more significant digits of precision if you decrease the relative error tolerance. The default value is `1e-6`.

Note: `RelTol` and `AbsTol` work together. `integral` might satisfy the relative error tolerance or the absolute error tolerance, but not necessarily both. For more information on using these tolerances, see the Tips section.

Example: `'RelTol',1e-9` sets the relative error tolerance to approximately 9 significant digits.

Data Types: `single` | `double`

`'ArrayValued'` — Array-valued function flag

`false` (default) | `true` | `0` | `1`

Array-valued function flag, specified as the comma-separated pair consisting of `'ArrayValued'` and either `false`, `true`, `0`, or `1`. Set this flag to `true` to indicate that

`fun` is a function that accepts a scalar input and returns a vector, matrix, or N-D array output.

The default value of `'false'` indicates that `fun` is a function that accepts a vector input and returns a vector output.

Example: `'ArrayValued',true` indicates that the integrand is an array-valued function.

`'Waypoints'` — Integration waypoints
vector

Integration waypoints, specified as the comma-separated pair consisting of `'Waypoints'` and a vector of real or complex numbers. Use waypoints to indicate any points in the integration interval that you would like the integrator to use. You can use waypoints to integrate efficiently across discontinuities of the integrand. Specify the locations of the discontinuities in the vector you supply.

You can specify waypoints when you want to perform complex contour integration. If `xmin`, `xmax`, or any entry of the waypoints vector is complex, the integration is performed over a sequence of straight line paths in the complex plane.

Example: `'Waypoints',[1+1i,1-1i]` specifies two complex waypoints along the interval of integration.

Data Types: `single` | `double`
Complex Number Support: Yes

Tips

- Do not use waypoints to specify singularities. Instead, split the interval and add the results of separate integrations with the singularities at the endpoints.
- The `integral` function attempts to satisfy:

  ```
  abs(q - Q) <= max(AbsTol,RelTol*abs(q))
  ```

  where `q` is the computed value of the integral and `Q` is the (unknown) exact value. The absolute and relative tolerances provide a way of trading off accuracy and computation time. Usually, the relative tolerance determines the accuracy of the integration. However if `abs(q)` is sufficiently small, the absolute tolerance determines the accuracy of the integration. You should generally specify both absolute and relative tolerances together.

- If you specify a complex value for `xmin`, `xmax`, or any waypoint, all of your limits and waypoints must be finite.
- If you are specifying single-precision limits of integration, or if `fun` returns single-precision results, you might need to specify larger absolute and relative error tolerances.

References

[1] L.F. Shampine "*Vectorized Adaptive Quadrature in MATLAB*," *Journal of Computational and Applied Mathematics*, 211, 2008, pp.131–140.

See Also

See Also

`integral2` | `integral3` | `trapz`

Topics

"Integration to Find Arc Length"
"Complex Line Integrals"
"Parameterizing Functions"
"Create Function Handle"

Introduced in R2012a

integral2

Numerically evaluate double integral

Syntax

```
q = integral2(fun,xmin,xmax,ymin,ymax)
q = integral2(fun,xmin,xmax,ymin,ymax,Name,Value)
```

Description

`q = integral2(fun,xmin,xmax,ymin,ymax)` approximates the integral of the function `z = fun(x,y)` over the planar region `xmin` ≤ `x` ≤ `xmax` and `ymin(x)` ≤ `y` ≤ `ymax(x)`.

`q = integral2(fun,xmin,xmax,ymin,ymax,Name,Value)` specifies additional options with one or more `Name,Value` pair arguments.

Examples

Integrate Triangular Region with Singularity at the Boundary

The function

$$f(x,y) = \frac{1}{\left(\sqrt{x+y}\right)\left(1+x+y\right)}$$

is undefined when x and y are zero. `integral2` performs best when singularities are on the integration boundary.

Create the anonymous function.

```
fun = @(x,y) 1./( sqrt(x + y) .* (1 + x + y).^2 )
```

```
fun = function_handle with value:
```

```
@(x,y)1./(sqrt(x+y).*(1+x+y).^2)
```

Integrate over the triangular region bounded by $0 \le x \le 1$ and $0 \le y \le 1 - x$.

```
ymax = @(x) 1 - x;
q = integral2(fun,0,1,0,ymax)
```

```
q = 0.2854
```

Evaluate Double Integral in Polar Coordinates

Define the function

$$f(\theta, r) = \frac{r}{\sqrt{r\cos\theta + r\sin\theta}\,(1 + r\cos\theta + r\sin\theta)^2}$$

```
fun = @(x,y) 1./( sqrt(x + y) .* (1 + x + y).^2 );
polarfun = @(theta,r) fun(r.*cos(theta),r.*sin(theta)).*r;
```

Define a function for the upper limit of r.

```
rmax = @(theta) 1./(sin(theta) + cos(theta));
```

Integrate over the region bounded by $0 \le \theta \le \pi/2$ and $0 \le r \le r_{max}$.

```
q = integral2(polarfun,0,pi/2,0,rmax)
```

```
q = 0.2854
```

Evaluate Double Integral of Parameterized Function with Specific Method and Error Tolerance

Create the anonymous parameterized function $f(x, y) = ax^2 + by^2$ with parameters $a = 3$ and $b = 5$.

```
a = 3;
b = 5;
fun = @(x,y) a*x.^2 + b*y.^2;
```

Evaluate the integral over the region $0 \le x \le 5$ and $-5 \le y \le 0$. Specify the `'iterated'` method and approximately 10 significant digits of accuracy.

```
format long
q = integral2(fun,0,5,-5,0,'Method','iterated',...
'AbsTol',0,'RelTol',1e-10)
```

```
q =
     1.666666666666666e+03
```

- "Singularity on Interior of Integration Domain"

Input Arguments

`fun` — Integrand
function handle

Integrand, specified as a function handle, defines the function to be integrated over the planar region `xmin` ≤ `x` ≤ `xmax` and `ymin(x)` ≤ `y` ≤ `ymax(x)`. The function `fun` must accept two arrays of the same size and return an array of corresponding values. It must perform element-wise operations.

Data Types: `function_handle`

`xmin` — Lower limit of *x*
real number

Lower limit of *x*, specified as a real scalar value that is either finite or infinite.

Data Types: `double` | `single`

`xmax` — Upper limit of *x*
real number

Upper limit of *x*, specified as a real scalar value that is either finite or infinite.

Data Types: `double` | `single`

`ymin` — Lower limit of *y*
real number | function handle

Lower limit of y, specified as a real scalar value that is either finite or infinite. You can specify `ymin` to be a function handle (a function of x) when integrating over a nonrectangular region.

Data Types: `double` | `function_handle` | `single`

`ymax` — Upper limit of y

real number | function handle

Upper limit of y, specified as a real scalar value that is either finite or infinite. You also can specify `ymax` to be a function handle (a function of x) when integrating over a nonrectangular region.

Data Types: `double` | `function_handle` | `single`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'AbsTol',1e-12` sets the absolute error tolerance to approximately 12 decimal places of accuracy.

`'AbsTol'` — Absolute error tolerance

nonnegative real number

Absolute error tolerance, specified as the comma-separated pair consisting of `'AbsTol'` and a nonnegative real number. `integral2` uses the absolute error tolerance to limit an estimate of the absolute error, $|q - Q|$, where q is the computed value of the integral and Q is the (unknown) exact value. `integral2` might provide more decimal places of precision if you decrease the absolute error tolerance. The default value is `1e-10`.

Note: `AbsTol` and `RelTol` work together. `integral2` might satisfy the absolute error tolerance or the relative error tolerance, but not necessarily both. For more information on using these tolerances, see the "Tips" on page 1-5763 section.

Example: `'AbsTol',1e-12` sets the absolute error tolerance to approximately 12 decimal places of accuracy.

Data Types: `double` | `single`

`'RelTol'` — Relative error tolerance
nonnegative real number

Relative error tolerance, specified as the comma-separated pair consisting of `'RelTol'` and a nonnegative real number. `integral2` uses the relative error tolerance to limit an estimate of the relative error, $|q - Q|/|Q|$, where q is the computed value of the integral and Q is the (unknown) exact value. `integral2` might provide more significant digits of precision if you decrease the relative error tolerance. The default value is `1e-6`.

Note: `RelTol` and `AbsTol` work together. `integral2` might satisfy the relative error tolerance or the absolute error tolerance, but not necessarily both. For more information on using these tolerances, see the "Tips" on page 1-5763 section.

Example: `'RelTol',1e-9` sets the relative error tolerance to approximately 9 significant digits.

Data Types: `double` | `single`

`'Method'` — Integration method
`'auto'` (default) | `'tiled'` | `'iterated'`

Integration method, specified as the comma-separated pair consisting of `'Method'` and one of the methods described below.

Integration Method	Description
`'auto'`	For most cases, `integral2` uses the `'tiled'` method. It uses the `'iterated'` method when any of the integration limits are infinite. This is the default method.
`'tiled'`	`integral2` transforms the region of integration to a rectangular shape and subdivides it into smaller rectangular regions as needed. The integration limits must be finite.
`'iterated'`	`integral2` calls `integral` to perform an iterated integral. The outer integral is evaluated over `xmin` ≤ `x` ≤ `xmax`. The inner integral is evaluated over `ymin(x)` ≤ `y` ≤ `ymax(x)`. The integration limits can be infinite.

Example: `'Method','tiled'` specifies the tiled integration method.

Output Arguments

q — Computed integral

numeric value

Computed integral of `fun(x,y)` over the specified region, returned as a numeric value.

Tips

- The `integral2` function attempts to satisfy:

  ```
  abs(q - Q) <= max(AbsTol,RelTol*abs(q))
  ```

  where `q` is the computed value of the integral and `Q` is the (unknown) exact value. The absolute and relative tolerances provide a way of trading off accuracy and computation time. Usually, the relative tolerance determines the accuracy of the integration. However if `abs(q)` is sufficiently small, the absolute tolerance determines the accuracy of the integration. You should generally specify both absolute and relative tolerances together.
- The `'iterated'` method can be more effective when your function has discontinuities within the integration region. However, the best performance and accuracy occurs when you split the integral at the points of discontinuity and sum the results of multiple integrations.
- When integrating over nonrectangular regions, the best performance and accuracy occurs when `ymin`, `ymax`, (or both) are function handles. Avoid setting integrand function values to zero to integrate over a nonrectangular region. If you must do this, specify `'iterated'` method.
- Use the `'iterated'` method when `ymin`, `ymax`, (or both) are unbounded functions.
- When paramaterizing anonymous functions, be aware that parameter values persist for the life of the function handle. For example, the function `fun = @(x,y) x + y + a` uses the value of `a` at the time `fun` was created. If you later decide to change the value of `a`, you must redefine the anonymous function with the new value.
- If you are specifying single-precision limits of integration, or if `fun` returns single-precision results, you might need to specify larger absolute and relative error tolerances.

References

[1] L.F. Shampine "*Vectorized Adaptive Quadrature in MATLAB*," *Journal of Computational and Applied Mathematics*, 211, 2008, pp.131–140.

[2] L.F. Shampine, "*MATLAB Program for Quadrature in 2D.*" *Applied Mathematics and Computation*. Vol. 202, Issue 1, 2008, pp. 266–274.

See Also

See Also

`integral` | `integral3` | `trapz`

Topics

"Singularity on Interior of Integration Domain"
"Parameterizing Functions"
"Create Function Handle"

Introduced in R2012a

integral3

Numerically evaluate triple integral

Syntax

```
q = integral3(fun,xmin,xmax,ymin,ymax,zmin,zmax)
q = integral3(fun,xmin,xmax,ymin,ymax,zmin,zmax,Name,Value)
```

Description

`q = integral3(fun,xmin,xmax,ymin,ymax,zmin,zmax)` approximates the integral of the function `z = fun(x,y,z)` over the region `xmin` ≤ `x` ≤ `xmax`, `ymin(x)` ≤ `y` ≤ `ymax(x)` and `zmin(x,y)` ≤ `z` ≤ `zmax(x,y)`.

`q = integral3(fun,xmin,xmax,ymin,ymax,zmin,zmax,Name,Value)` specifies additional options with one or more `Name,Value` pair arguments.

Examples

Triple Integral with Finite Limits

Define the anonymous function $f(x,y,z) = y\sin x + z\cos x$.

```
fun = @(x,y,z) y.*sin(x)+z.*cos(x)
```

```
fun = function_handle with value:
    @(x,y,z)y.*sin(x)+z.*cos(x)
```

Integrate over the region $0 \le x \le \pi$, $0 \le y \le 1$, and $-1 \le z \le 1$.

```
q = integral3(fun,0,pi,0,1,-1,1)
```

```
q = 2.0000
```

Integral Over the Unit Sphere in Cartesian Coordinates

Define the anonymous function $f(x, y, z) = x \cos y + x^2 \cos z$.

```
fun = @(x,y,z) x.*cos(y) + x.^2.*cos(z)
```

```
fun = function_handle with value:
    @(x,y,z)x.*cos(y)+x.^2.*cos(z)
```

Define the limits of integration.

```
xmin = -1;
xmax = 1;
ymin = @(x)-sqrt(1 - x.^2);
ymax = @(x) sqrt(1 - x.^2);
zmin = @(x,y)-sqrt(1 - x.^2 - y.^2);
zmax = @(x,y) sqrt(1 - x.^2 - y.^2);
```

Evaluate the definite integral with the `'tiled'` method.

```
q = integral3(fun,xmin,xmax,ymin,ymax,zmin,zmax,'Method','tiled')
```

```
q = 0.7796
```

Evaluate Improper Triple Integral of Parameterized Function

Define the anonymous parameterized function $f(x, y, z) = 10/(x^2 + y^2 + z^2 + a)$.

```
a = 2;
f = @(x,y,z) 10./(x.^2 + y.^2 + z.^2 + a);
```

Evaluate the triple integral over the region $-\infty \le x \le 0$, $-100 \le y \le 0$, and $-100 \le z \le 0$.

```
format long
q1 = integral3(f,-Inf,0,-100,0,-100,0)
```

```
q1 =
     2.734244598320928e+03
```

Evaluate the integral again and specify accuracy to approximately 9 significant digits.

```
q2 = integral3(f,-Inf,0,-100,0,-100,0,'AbsTol', 0,'RelTol',1e-9)
```

```
q2 =
     2.734244599944285e+03
```

Input Arguments

`fun` — Integrand
function handle

Integrand, specified as a function handle, defines the function to be integrated over the region `xmin` ≤ `x` ≤ `xmax`, `ymin(x)` ≤ `y` ≤ `ymax(x)`, and `zmin(x,y)` ≤ `z` ≤ `zmax(x,y)`. The function `fun` must accept three arrays of the same size and return an array of corresponding values. It must perform element-wise operations.

Data Types: `function_handle`

`xmin` — Lower limit of *x*
real number

Lower limit of *x*, specified as a real scalar value that is either finite or infinite.

Example:

Data Types: `double` | `single`

`xmax` — Upper limit of *x*
real number

Upper limit of *x*, specified as a real scalar value that is either finite or infinite.

Data Types: `double` | `single`

`ymin` — Lower limit of *y*
real number | function handle

Lower limit of *y*, specified as a real scalar value that is either finite or infinite. You also can specify `ymin` to be a function handle (a function of *x*) when integrating over a nonrectangular region.

Example:

Data Types: `double` | `function_handle` | `single`

`ymax` — Upper limit of *y*
real number | function handle

Upper limit of *y*, specified as a real scalar value that is either finite or infinite. You also can specify `ymax` to be a function handle (a function of *x*) when integrating over a nonrectangular region.

Example:

Data Types: `double` | `function_handle` | `single`

`zmin` — Lower limit of *z*
real number | function handle

Lower limit of *z*, specified as a real scalar value that is either finite or infinite. You also can specify `zmin` to be a function handle (a function of *x*,*y*) when integrating over a nonrectangular region.

Data Types: `double` | `function_handle` | `single`

`zmax` — Upper limit of *z*
real number | function handle

Upper limit of *z*, specified as a real scalar value that is either finite or infinite. You also can specify `zmax` to be a function handle (a function of *x*,*y*) when integrating over a nonrectangular region.

Data Types: `double` | `function_handle` | `single`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'AbsTol',1e-12` sets the absolute error tolerance to approximately 12 decimal places of accuracy.

`'AbsTol'` — Absolute error tolerance
nonnegative real number

Absolute error tolerance, specified as the comma-separated pair consisting of `'AbsTol'` and a nonnegative real number. `integral3` uses the absolute error tolerance to limit an estimate of the absolute error, $|q - Q|$, where q is the computed value of the integral and Q is the (unknown) exact value. `integral3` might provide more decimal places of precision if you decrease the absolute error tolerance. The default value is `1e-10`.

Note: `AbsTol` and `RelTol` work together. `integral3` might satisfy the absolute error tolerance or the relative error tolerance, but not necessarily both. For more information on using these tolerances, see the "Tips" on page 1-5770 section.

Example: `'AbsTol',1e-12` sets the absolute error tolerance to approximately 12 decimal places of accuracy.

Data Types: `double` | `single`

`'RelTol'` — Relative error tolerance
nonnegative real number

Relative error tolerance, specified as the comma-separated pair consisting of `'RelTol'` and a nonnegative real number. `integral3` uses the relative error tolerance to limit an estimate of the relative error, $|q - Q|/|Q|$, where q is the computed value of the integral and Q is the (unknown) exact value. `integral3` might provide more significant digits of precision if you decrease the relative error tolerance. The default value is `1e-6`.

Note: `RelTol` and `AbsTol` work together. `integral3` might satisfy the relative error tolerance or the absolute error tolerance, but not necessarily both. For more information on using these tolerances, see the "Tips" on page 1-5770 section.

Example: `'RelTol',1e-9` sets the relative error tolerance to approximately 9 significant digits.

Data Types: `double` | `single`

`'Method'` — Integration method
`'auto'` (default) | `'tiled'` | `'iterated'`

Integration method, specified as the comma-separated pair consisting of `'Method'` and one of the methods described below.

Integration Method	Description
`'auto'`	For most cases, `integral3` uses the `'tiled'` method. It uses the `'iterated'` method when any of the integration limits are infinite. This is the default method.
`'tiled'`	`integral3` calls `integral` to integrate over `xmin` ≤ `x` ≤ `xmax`. It calls `integral2` with the `'tiled'` method to evaluate the double integral over `ymin(x)` ≤ `y` ≤ `ymax(x)` and `zmin(x,y)` ≤ `z` ≤ `zmax(x,y)`.
`'iterated'`	`integral3` calls `integral` to integrate over `xmin` ≤ `x` ≤ `xmax`. It calls `integral2` with the `'iterated'` method to evaluate the double integral over `ymin(x)` ≤ `y` ≤ `ymax(x)` and `zmin(x,y)` ≤ `z` ≤ `zmax(x,y)`. The integration limits can be infinite.

Example: `'Method','tiled'` specifies the tiled integration method.

Output Arguments

q — Computed integral

numeric value

Computed integral of `fun(x,y,z)` over the specified region, returned as a numeric value.

Tips

- The `integral3` function attempts to satisfy:

  ```
  abs(q - Q) <= max(AbsTol,RelTol*abs(q))
  ```

  where `q` is the computed value of the integral and `Q` is the (unknown) exact value. The absolute and relative tolerances provide a way of trading off accuracy and computation time. Usually, the relative tolerance determines the accuracy of the integration. However if `abs(q)` is sufficiently small, the absolute tolerance determines the accuracy of the integration. You should generally specify both absolute and relative tolerances together.
- The `'iterated'` method can be more effective when your function has discontinuities within the integration region. However, the best performance and

accuracy occurs when you split the integral at the points of discontinuity and sum the results of multiple integrations.

- When integrating over nonrectangular regions, the best performance and accuracy occurs when any or all of the limits: `ymin`, `ymax`, `zmin`, `zmax` are function handles. Avoid setting integrand function values to zero to integrate over a nonrectangular region. If you must do this, specify `'iterated'` method.
- Use the `'iterated'` method when any or all of the limits: `ymin(x)`, `ymax(x)`, `zmin(x,y)`, `zmax(x,y)` are unbounded functions.
- When paramaterizing anonymous functions, be aware that parameter values persist for the life of the function handle. For example, the function `fun = @(x,y,z) x + y + z + a` uses the value of `a` at the time `fun` was created. If you later decide to change the value of `a`, you must redefine the anonymous function with the new value.
- If you are specifying single-precision limits of integration, or if `fun` returns single-precision results, you may need to specify larger absolute and relative error tolerances.

References

[1] L.F. Shampine "*Vectorized Adaptive Quadrature in MATLAB,*" *Journal of Computational and Applied Mathematics*, 211, 2008, pp.131–140.

[2] L.F. Shampine, "*MATLAB Program for Quadrature in 2D.*" *Applied Mathematics and Computation.* Vol. 202, Issue 1, 2008, pp. 266–274.

See Also

See Also

`integral` | `integral2` | `trapz`

Topics

"Parameterizing Functions"
"Create Function Handle"

Introduced in R2012a

interfaces

List custom interfaces exposed by COM server object

Syntax

```
customlist = interfaces(h)
```

Description

`customlist = interfaces(h)` returns cell array of character vectors `customlist` listing all custom interfaces implemented by the component in a specific COM server object. The server is designated by input argument `h`, the handle returned by the `actxcontrol` or `actxserver` function when creating that server.

The `interfaces` function only lists the custom interfaces exposed by the object; it does not return interfaces. Use the `invoke` function to return a handle to a specific custom interface.

COM functions are available on Microsoft Windows systems only.

See Also

`actxcontrol` | `invoke` | `actxserver` | `get (COM)`

Topics

"Custom Interfaces"

Introduced before R2006a

interp1

1-D data interpolation (table lookup)

Syntax

```
vq = interp1(x,v,xq)
vq = interp1(x,v,xq,method)
vq = interp1(x,v,xq,method,extrapolation)
```

```
vq = interp1(v,xq)
vq = interp1(v,xq,method)
vq = interp1(v,xq,method,extrapolation)
```

```
pp = interp1(x,v,method,'pp')
```

Description

`vq = interp1(x,v,xq)` returns interpolated values of a 1-D function at specific query points using linear interpolation. Vector `x` contains the sample points, and `v` contains the corresponding values, $v(x)$. Vector `xq` contains the coordinates of the query points.

If you have multiple sets of data that are sampled at the same point coordinates, then you can pass `v` as an array. Each column of array `v` contains a different set of 1-D sample values.

`vq = interp1(x,v,xq,method)` specifies an alternative interpolation method: `'nearest'`, `'next'`, `'previous'`, `'linear'`,`'spline'`,`'pchip'`, or `'cubic'`. The default method is `'linear'`.

`vq = interp1(x,v,xq,method,extrapolation)` specifies a strategy for evaluating points that lie outside the domain of `x`. Set `extrapolation` to `'extrap'` when you want to use the `method` algorithm for extrapolation. Alternatively, you can specify a scalar value, in which case, `interp1` returns that value for all points outside the domain of `x`.

`vq = interp1(v,xq)` returns interpolated values and assumes a default set of sample point coordinates. The default points are the sequence of numbers from `1` to `n`, where `n` depends on the shape of `v`:

- When v is a vector, the default points are `1:length(v)`.
- When v is an array, the default points are `1:size(v,1)`.

Use this syntax when you are not concerned about the absolute distances between points.

`vq = interp1(v,xq,method)` specifies any of the alternative interpolation methods and uses the default sample points.

`vq = interp1(v,xq,method,extrapolation)` specifies an extrapolation strategy and uses the default sample points.

`pp = interp1(x,v,method,'pp')` returns the piece-wise polynomial form of $v(x)$ using the `method` algorithm.

Note: This syntax is not recommended. Use `griddedInterpolant` instead.

Examples

Interpolation of Coarsely Sampled Sine Function

Define the sample points, `x`, and corresponding sample values, `v`.

```
x = 0:pi/4:2*pi;
v = sin(x);
```

Define the query points to be a finer sampling over the range of `x`.

```
xq = 0:pi/16:2*pi;
```

Interpolate the function at the query points and plot the result.

```
figure
vq1 = interp1(x,v,xq);
plot(x,v,'o',xq,vq1,':.');
xlim([0 2*pi]);
title('(Default) Linear Interpolation');
```

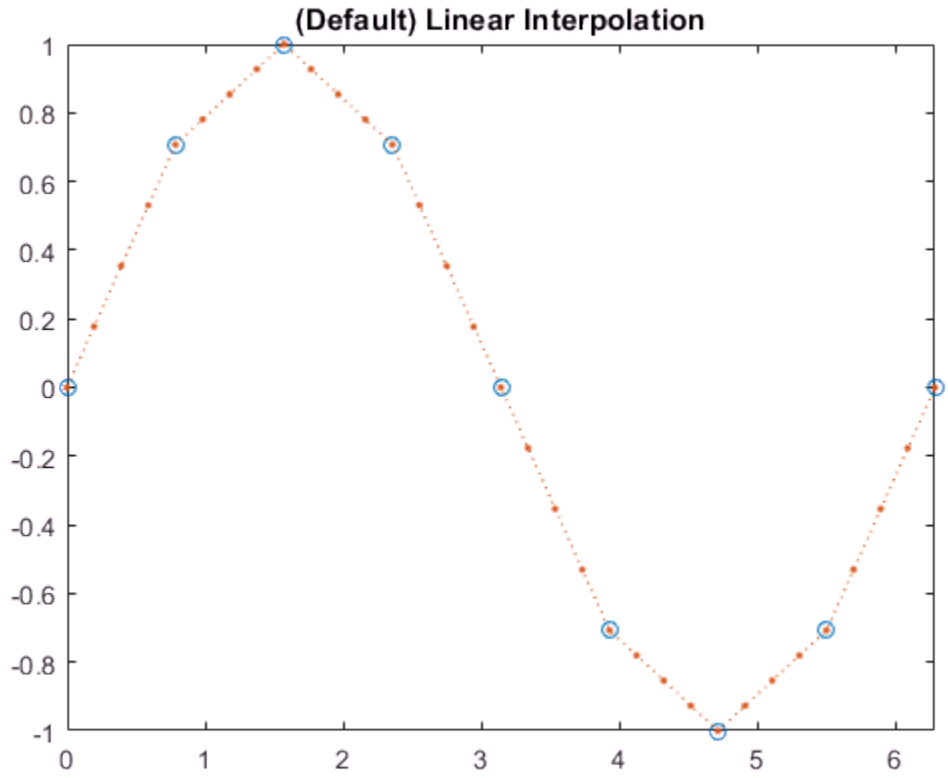

Now evaluate `v` at the same points using the `'spline'` method.

```
figure
vq2 = interp1(x,v,xq,'spline');
plot(x,v,'o',xq,vq2,':.');
xlim([0 2*pi]);
title('Spline Interpolation');
```

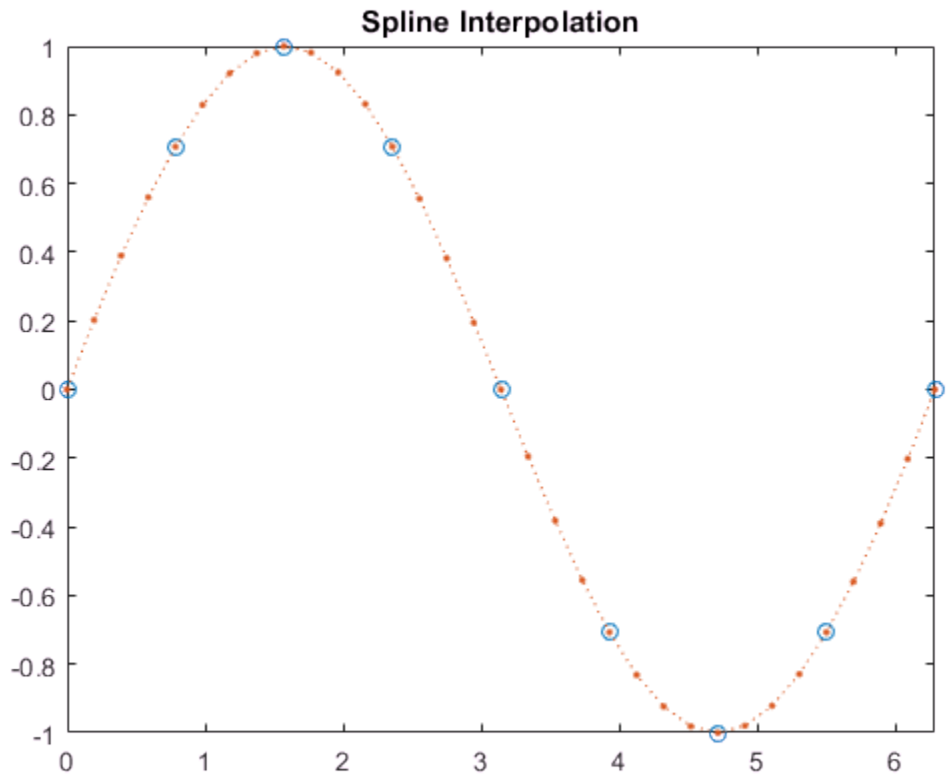

Interpolation Without Specifying Points

Define a set of function values.

```
v = [0  1.41  2  1.41  0  -1.41  -2  -1.41 0];
```

Define a set of query points that fall between the default points, `1:9`. In this case, the default points are `1:9` because `v` contains `9` values.

```
xq = 1.5:8.5;
```

Evaluate `v` at `xq`.

```
vq = interp1(v,xq);
```

Plot the result.

```
figure
plot((1:9),v,'o',xq,vq,'*');
legend('v','vq');
```

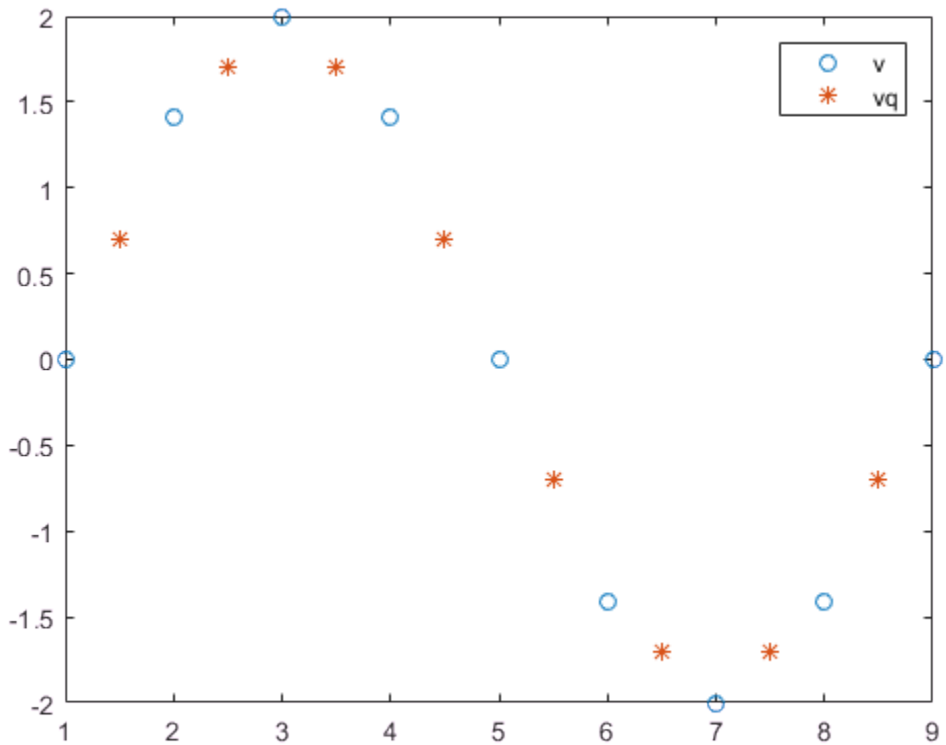

Interpolation of Complex Values

Define a set of sample points.

```
x = 1:10;
```

Define the values of the function, $v(x) = 5x + x^2 i$, at the sample points.

```
v = (5*x)+(x.^2*1i);
```

Define the query points to be a finer sampling over the range of x.

```
xq = 1:0.25:10;
```

Interpolate v at the query points.

```
vq = interp1(x,v,xq);
```

Plot the real part of the result in red and the imaginary part in blue.

```
figure
plot(x,real(v),'*r',xq,real(vq),'-r');
hold on
plot(x,imag(v),'*b',xq,imag(vq),'-b');
```

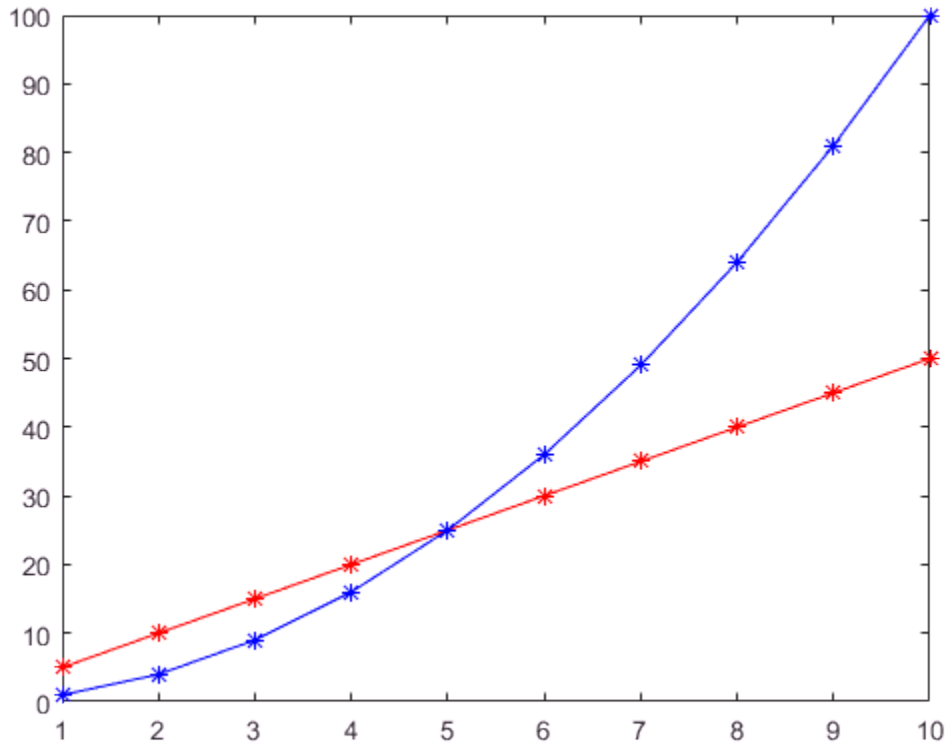

Interpolation of Dates and Times

Interpolate time-stamped data points.

Consider a data set containing temperature readings that are measured every four hours. Create a table with one day's worth of data and plot the data.

```
x = (datetime(2016,1,1):hours(4):datetime(2016,1,2))';
x.Format = 'MMM dd, HH:mm';
T = [31 25 24 41 43 33 31]';
WeatherData = table(x,T,'VariableNames',{'Time','Temperature'})
```

```
WeatherData = 7×2 table
        Time         Temperature
    _____________    ___________

    Jan 01, 00:00    31
    Jan 01, 04:00    25
    Jan 01, 08:00    24
    Jan 01, 12:00    41
    Jan 01, 16:00    43
    Jan 01, 20:00    33
    Jan 02, 00:00    31
```

```
plot(WeatherData.Time, WeatherData.Temperature, 'o')
```

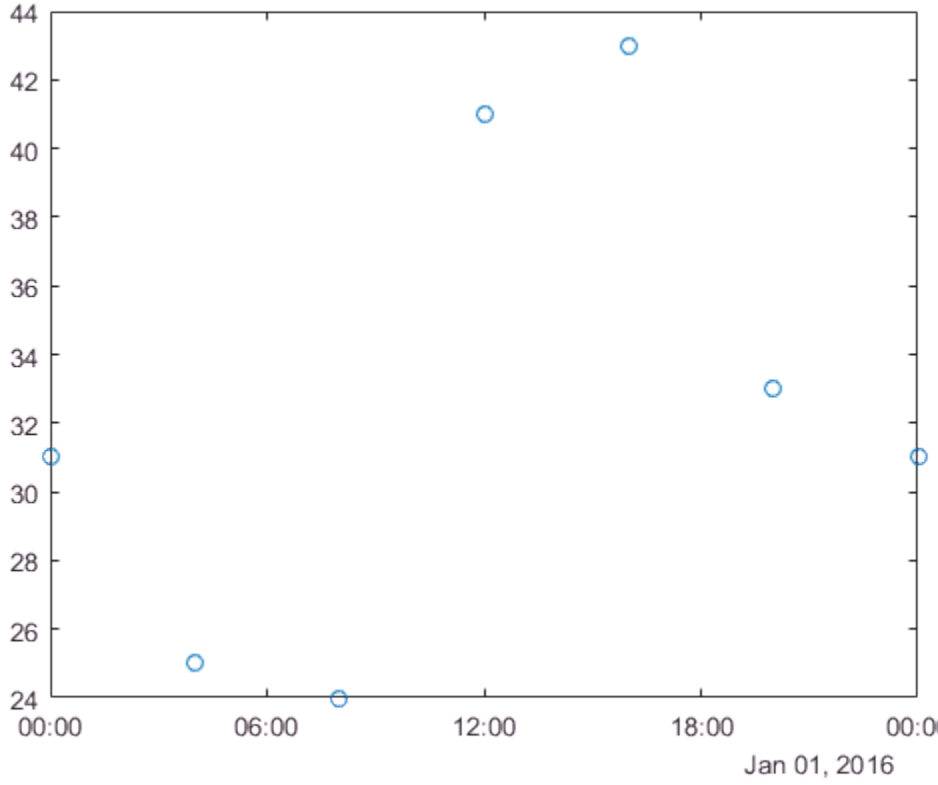

Interpolate the data set to predict the temperature reading during each minute of the day. Since the data is periodic, use the `'spline'` interpolation method.

```
xq = (datetime(2016,1,1):minutes(1):datetime(2016,1,2))';
V = interp1(WeatherData.Time, WeatherData.Temperature, xq, 'spline');
```

Plot the interpolated points.

```
hold on
plot(xq,V,'r')
```

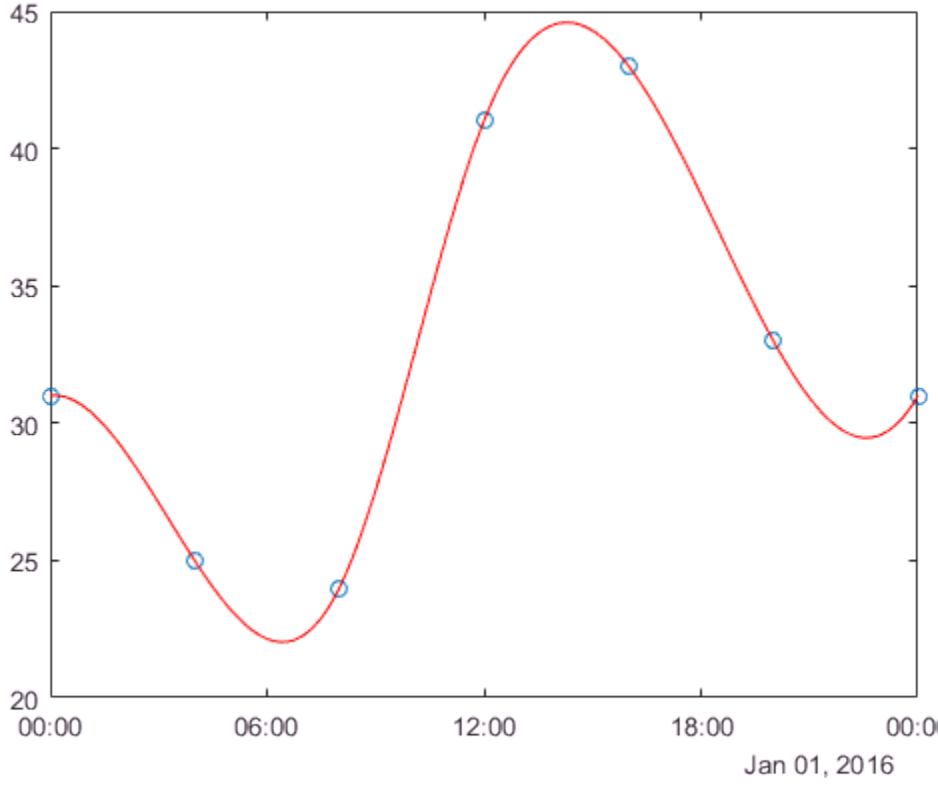

Extrapolation Using Two Different Methods

Define the sample points, `x`, and corresponding sample values, `v`.

```
x = [1 2 3 4 5];
v = [12 16 31 10 6];
```

Specify the query points, `xq`, that extend beyond the domain of `x`.

```
xq = [0 0.5 1.5 5.5 6];
```

Evaluate `v` at `xq` using the `'pchip'` method.

```
vq1 = interp1(x,v,xq,'pchip')

vq1 =

   19.3684   13.6316   13.2105    7.4800   12.5600
```

Next, evaluate `v` at `xq` using the `'linear'` method.

```
vq2 = interp1(x,v,xq,'linear')

vq2 =

   NaN   NaN    14   NaN   NaN
```

Now, use the `'linear'` method with the `'extrap'` option.

```
vq3 = interp1(x,v,xq,'linear','extrap')

vq3 =

     8    10    14     4     2
```

`'pchip'` extrapolates by default, but `'linear'` does not.

Designate Constant Value for All Queries Outside the Domain of x

Define the sample points, `x`, and corresponding sample values, `v`.

```
x = [-3 -2 -1 0 1 2 3];
v = 3*x.^2;
```

Specify the query points, `xq`, that extend beyond the domain of `x`.

```
xq = [-4 -2.5 -0.5 0.5 2.5 4];
```

Now evaluate `v` at `xq` using the `'pchip'` method and assign any values outside the domain of `x` to the value, `27`.

```
vq = interp1(x,v,xq,'pchip',27)
```

```
vq =

   27.0000   18.6563    0.9375    0.9375   18.6563   27.0000
```

Interpolate Multiple Sets of Data in One Pass

Define the sample points.

```
x = (-5:5)';
```

Sample three different parabolic functions at the points defined in `x`.

```
v1 = x.^2;
v2 = 2*x.^2 + 2;
v3 = 3*x.^2 + 4;
```

Create matrix `v`, whose columns are the vectors, `v1`, `v2`, and `v3`.

```
v = [v1 v2 v3];
```

Define a set of query points, `xq`, to be a finer sampling over the range of `x`.

```
xq = -5:0.1:5;
```

Evaluate all three functions at `xq` and plot the results.

```
vq = interp1(x,v,xq,'pchip');
figure
plot(x,v,'o',xq,vq);

h = gca;
h.XTick = -5:5;
```

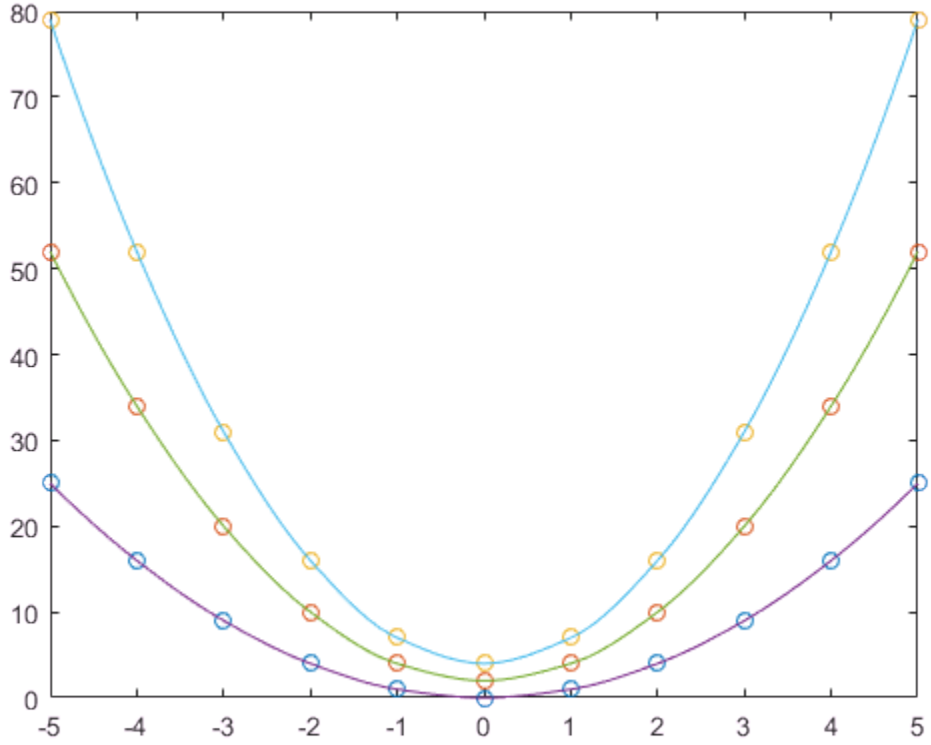

The circles in the plot represent `v`, and the solid lines represent `vq`.

Input Arguments

`x` — Sample points

vector

Sample points, specified as a row or column vector of real numbers. The values in `x` must be distinct. The length of `x` must conform to one of the following requirements:

- If `v` is a vector, then `length(x)` must equal `length(v)`.

- If `v` is an array, then `length(x)` must equal `size(v,1)`.

Example: `[1 2 3 4 5 6 7 8 9 10]`

Example: `1:10`

Example: `[3 7 11 15 19 23 27 31]'`

Data Types: `single` | `double` | `duration` | `datetime`

`v` — Sample values

vector | matrix | array

Sample values, specified as a vector, matrix, or array of real or complex numbers. If `v` is a matrix or an array, then each column contains a separate set of 1-D values.

If `v` contains complex numbers, then `interp1` interpolates the real and imaginary parts separately.

Example: `rand(1,10)`

Example: `rand(10,1)`

Example: `rand(10,3)`

Data Types: `single` | `double` | `duration` | `datetime`
Complex Number Support: Yes

`xq` — Query points

scalar | vector | matrix | array

Query points, specified as a scalar, vector, matrix, or array of real numbers.

Example: `5`

Example: `1:0.05:10`

Example: `(1:0.05:10)'`

Example: `[0 1 2 7.5 10]`

Data Types: `single` | `double` | `duration` | `datetime`

`method` — Interpolation method

`'linear'` (default) | `'nearest'` | `'next'` | `'previous'` | `'spline'` | `'pchip'` | `'cubic'`

Interpolation method, specified as a value from the table below.

Method	Description	Continuity	Comments
`'linear'`	Linear interpolation. The interpolated value at a query point is based on linear interpolation of the values at neighboring grid points in each respective dimension. This is the default interpolation method.	C^0	• Requires at least 2 points. • Requires more memory and computation time than nearest neighbor.
`'nearest'`	Nearest neighbor interpolation. The interpolated value at a query point is the value at the nearest sample grid point.	Discontinuous	• Requires at least 2 points. • Modest memory requirements • Fastest computation time
`'next'`	Next neighbor interpolation. The interpolated value at a query point is the value at the next sample grid point.	Discontinuous	• Requires at least 2 points. • Same memory requirements and computation time as `'nearest'`.
`'previous'`	Previous neighbor interpolation. The interpolated value at a query point is the value at the previous sample grid point.	Discontinuous	• Requires at least 2 points. • Same memory requirements and computation time as `'nearest'`.
`'pchip'`	Shape-preserving piecewise cubic interpolation. The interpolated value at a query point is based on a shape-preserving piecewise cubic interpolation of the values at neighboring grid points.	C^1	• Requires at least 4 points. • Requires more memory and computation time than linear.

Method	Description	Continuity	Comments
`'cubic'` **Note:** The behavior of `interp1(...` will change in a future release. In a future release, this method will perform cubic convolution.	Same as `'pchip'`.	C^1	This method currently returns the same result as `'pchip'`.
`'v5cubic'`	Cubic convolution used in MATLAB 5.	C^1	Points must be uniformly spaced. `'cubic'` will replace `'v5cubic'` in a future release.
`'spline'`	Spline interpolation using not-a-knot end conditions. The interpolated value at a query point is based on a cubic interpolation of the values at neighboring grid points in each respective dimension.	C^2	• Requires at least 4 points. • Requires more memory and computation time than `'pchip'`.

`extrapolation` — Extrapolation strategy

`'extrap'` | scalar value

Extrapolation strategy, specified as `'extrap'` or a real scalar value.

- Specify `'extrap'` when you want `interp1` to evaluate points outside the domain using the same method it uses for interpolation.
- Specify a scalar value when you want `interp1` to return a specific constant value for points outside the domain.

The default behavior depends on the input arguments:

- If you specify the `'pchip'` or `'spline'` interpolation methods, then the default behavior is `'extrap'`.
- All other interpolation methods return `NaN` by default for query points outside the domain.

Example: `'extrap'`

Example: `5`

Data Types: `char` | `single` | `double`

Output Arguments

vq — Interpolated values

scalar | vector | matrix | array

Interpolated values, returned as a scalar, vector, matrix, or array. The size of `vq` depends on the shape of `v` and `xq`.

Shape of v	Shape of xq	Size of Vq	Example
Vector	Vector	`size(xq)`	If `size(v) = [1 100]` and `size(xq) = [1 500]`, then `size(vq) = [1 500]`.
Vector	Matrix or N-D Array	`size(xq)`	If `size(v) = [1 100]` and `size(xq) = [50 30]`, then `size(vq) = [50 30]`.
Matrix or N-D Array	Vector	`[length(xq)` `size(v,2),...,size(v,n`	If `size(v) = [100 3]` and `size(xq) = [1 500]`, then `size(vq) = [500 3]`.
Matrix or N-D Array	Matrix or N-D Array	`[size(xq,1),...,size(x` `size(v,2),...,size(v,m`	If `size(v) = [4 5 6]` and `size(xq) = [2 3 7]`, then `size(vq) = [2 3 7 5 6]`.

pp — Piecewise polynomial

structure

Piecewise polynomial, returned as a structure that you can pass to the `ppval` function for evaluation.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not support the `'cubic'` method. Instead, use `'v5cubic'` or `'spline'`.
- The input argument `x` (sample points) must be strictly increasing or strictly decreasing. Indices are not reordered.
- If the input argument `v` (sample values) is a variable-length vector (1-by-`:` or `:`-by-1), then the shape of the output `vq` matches the shape in MATLAB.

  If the input argument `v` is variable-size, is not a variable-length vector, and becomes a row vector at run time, then an error occurs.
- If the input argument `xq` (query points) is variable-size, is not a variable-length vector, and becomes a row or column vector at run time, then an error occurs.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`griddedInterpolant` | `interp2` | `interp3` | `interpn`

Introduced before R2006a

interp1q

Quick 1-D linear interpolation

Note: `interp1q` is not recommended. Use `interp1` instead.

Syntax

```
yi = interp1q(x,Y,xi)
```

Description

`yi = interp1q(x,Y,xi)` returns the value of the 1-D function `Y` at the points of column vector `xi` using linear interpolation. The vector `x` specifies the coordinates of the underlying interval. The length of output `yi` is equal to the length of `xi`.

For `interp1q` to work properly,

- `x` must be a monotonically increasing column vector.
- `Y` must be a column vector or matrix with `length(x)` rows.
- `xi` must be a column vector

`interp1q` returns NaN for any values of `xi` that lie outside the coordinates in `x`. If `Y` is a matrix, then the interpolation is performed for each column of `Y`, in which case `yi` is `length(xi)-by-size(Y,2)`.

Examples

Linear Interpolation Using `interp1q`

Generate a coarse sine curve and interpolate over a finer abscissa.

```
x = (0:10)';
```

```
y = sin(x);
xi = (0:.25:10)';
yi = interp1q(x,y,xi);
plot(x,y,'o',xi,yi)
```

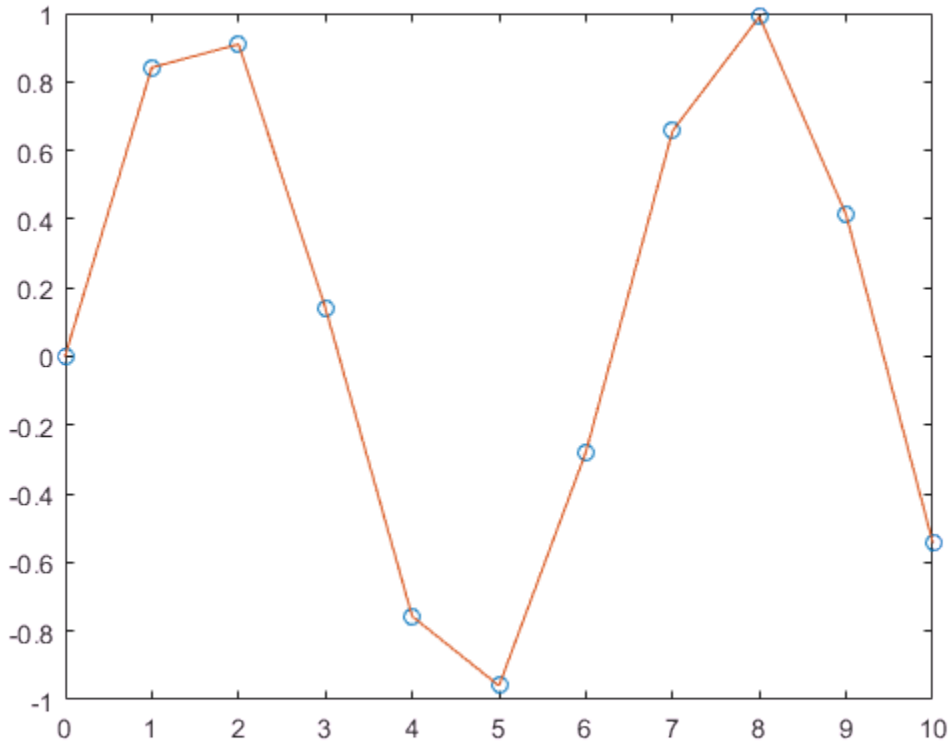

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Results might not match MATLAB when some `Y` values are `Inf` or `NaN`.

See Also

`interp1` | `interp2` | `interp3` | `interpn`

interp2

Interpolation for 2-D gridded data in meshgrid format

Syntax

```
Vq = interp2(X,Y,V,Xq,Yq)
Vq = interp2(V,Xq,Yq)
Vq = interp2(V)
Vq = interp2(V,k)

Vq = interp2( ___ ,method)
Vq = interp2( ___ ,method,extrapval)
```

Description

`Vq = interp2(X,Y,V,Xq,Yq)` returns interpolated values of a function of two variables at specific query points using linear interpolation. The results always pass through the original sampling of the function. `X` and `Y` contain the coordinates of the sample points. `V` contains the corresponding function values at each sample point. `Xq` and `Yq` contain the coordinates of the query points.

`Vq = interp2(V,Xq,Yq)` assumes a default grid of sample points. The default grid points cover the rectangular region, `X=1:n` and `Y=1:m`, where `[m,n] = size(V)`. Use this syntax to when you want to conserve memory and are not concerned about the absolute distances between points.

`Vq = interp2(V)` returns the interpolated values on a refined grid formed by dividing the interval between sample values once in each dimension.

`Vq = interp2(V,k)` returns the interpolated values on a refined grid formed by repeatedly halving the intervals `k` times in each dimension. This results in `2^k-1` interpolated points between sample values.

`Vq = interp2( ___ ,method)` specifies an optional, trailing input argument that you can pass with any of the previous syntaxes. `method` can be any of the following

that specify alternative interpolation methods: `'linear'`, `'nearest'`, `'cubic'`, or `'spline'`. The default method is `'linear'`.

`Vq = interp2( ___ ,method,extrapval)` also specifies `extrapval`, a scalar value that is assigned to all queries that lie outside the domain of the sample points.

If you omit the `extrapval` argument for queries outside the domain of the sample points, then based on the `method` argument `interp2` returns one of the following:

- The extrapolated values for the `'spline'` method
- `NaN` values for interpolation methods other than `'spline'`

Examples

Interpolate Over a Grid Using Default Method

Coarsely sample the `peaks` function.

```
[X,Y] = meshgrid(-3:3);
V = peaks(X,Y);
```

Plot the coarse sampling.

```
figure
surf(X,Y,V)
title('Original Sampling');
```

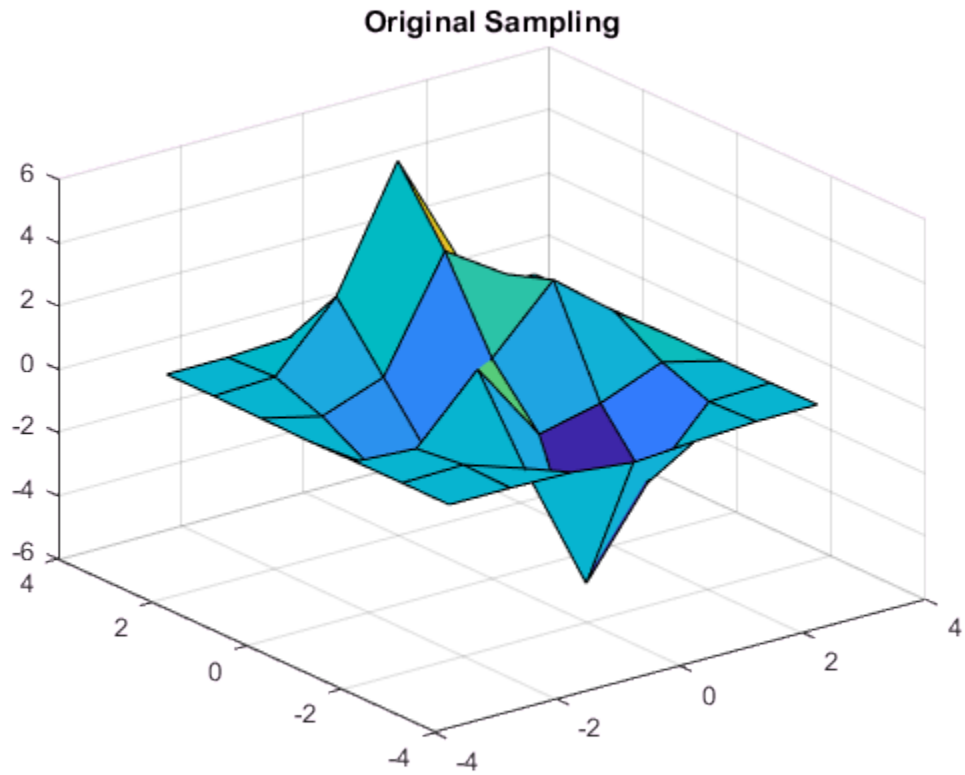

Create the query grid with spacing of 0.25.

```
[Xq,Yq] = meshgrid(-3:0.25:3);
```

Interpolate at the query points.

```
Vq = interp2(X,Y,V,Xq,Yq);
```

Plot the result.

```
figure
surf(Xq,Yq,Vq);
title('Linear Interpolation Using Finer Grid');
```

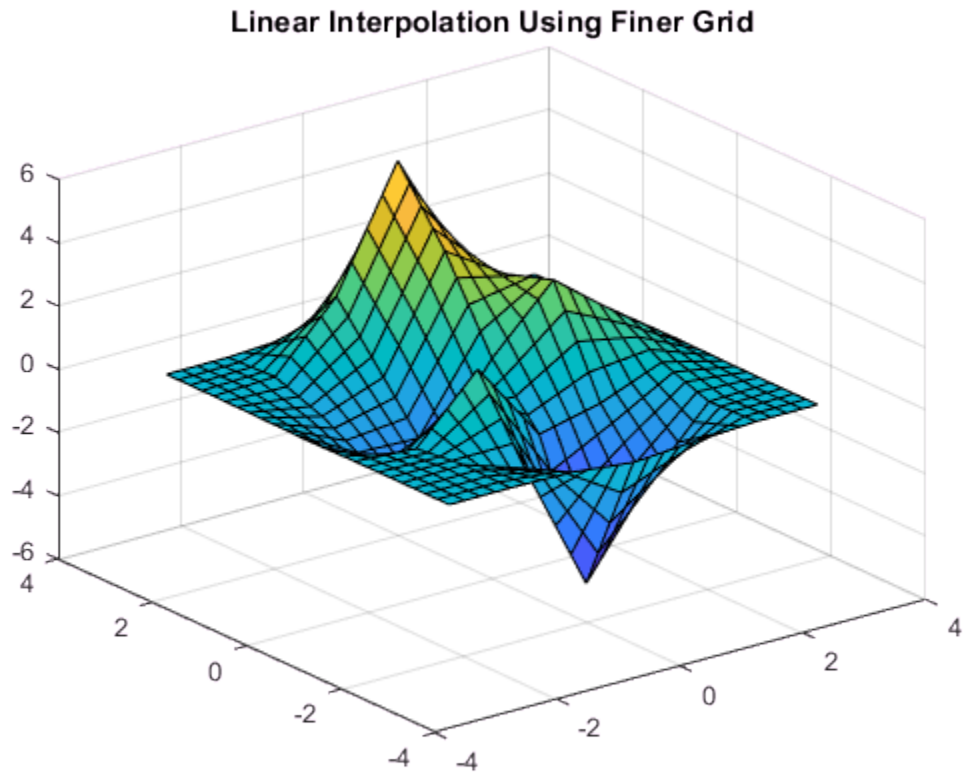

Interpolate Over a Grid Using Cubic Method

Coarsely sample the peaks function.

```
[X,Y] = meshgrid(-3:3);
V = peaks(7);
```

Plot the coarse sampling.

```
figure
surf(X,Y,V)
title('Original Sampling');
```

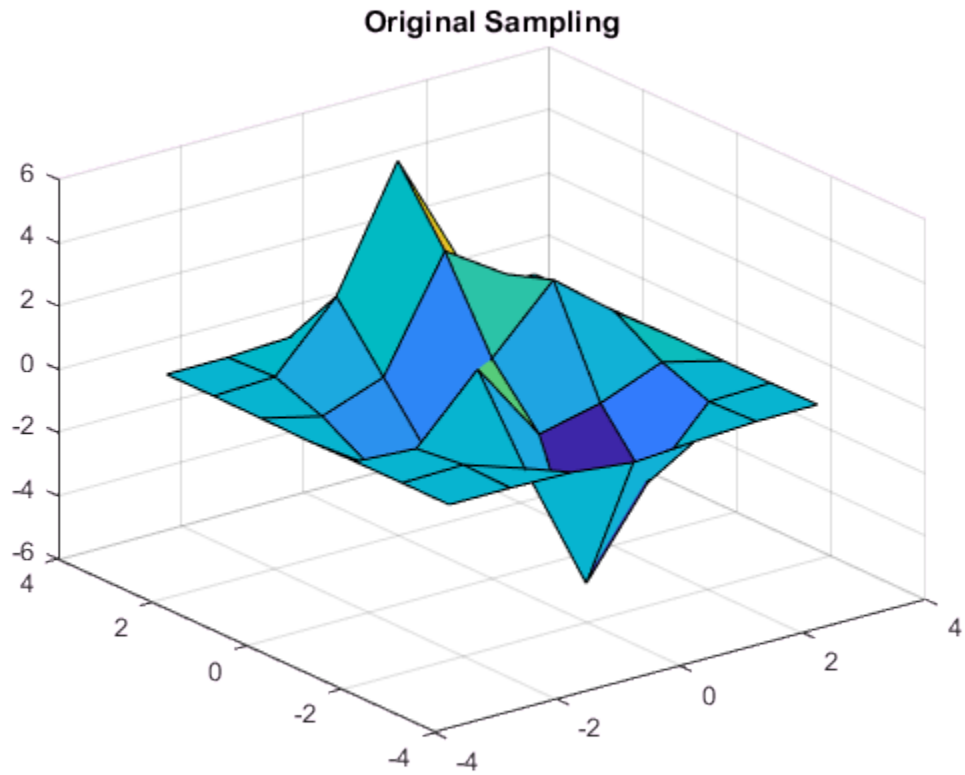

Create the query grid with spacing of 0.25.

```
[Xq,Yq] = meshgrid(-3:0.25:3);
```

Interpolate at the query points, and specify cubic interpolation.

```
Vq = interp2(X,Y,V,Xq,Yq,'cubic');
```

Plot the result.

```
figure
surf(Xq,Yq,Vq);
title('Cubic Interpolation Over Finer Grid');
```

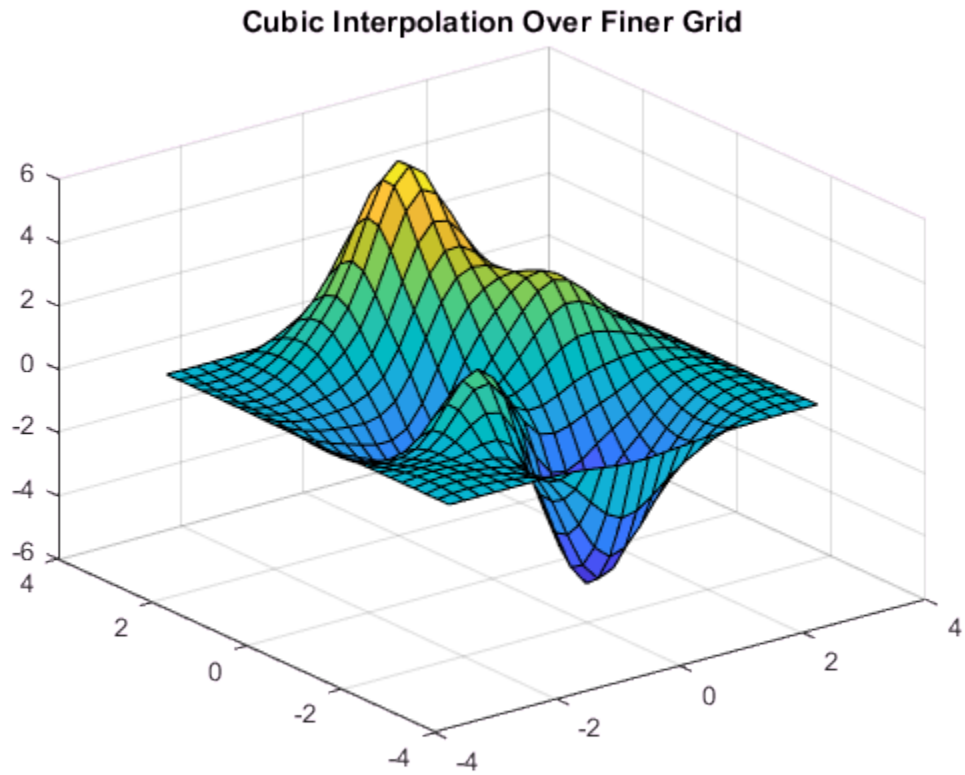

Refine Grayscale Image

Load some image data into the workspace.

```
load clown
```

Isolate a small region of the image and cast it to single.

```
V = single(X(1:124,75:225));
```

Display the image.

```
figure
imagesc(V);
```

```
colormap gray
axis image
axis off
title('Original Image');
```

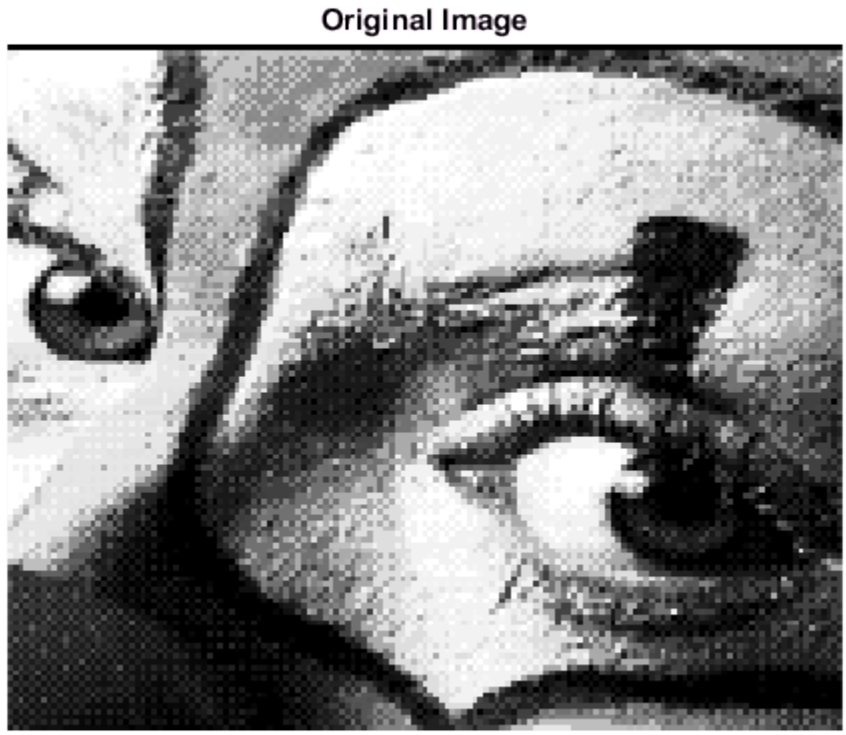

Insert interpolated values by repeatedly dividing the intervals between points of the refined grid five times in each dimension.

```
Vq = interp2(V,5);
```

Display the result.

```
figure
imagesc(Vq);
colormap gray
```

```
axis image
axis off
title('Linear Interpolation');
```

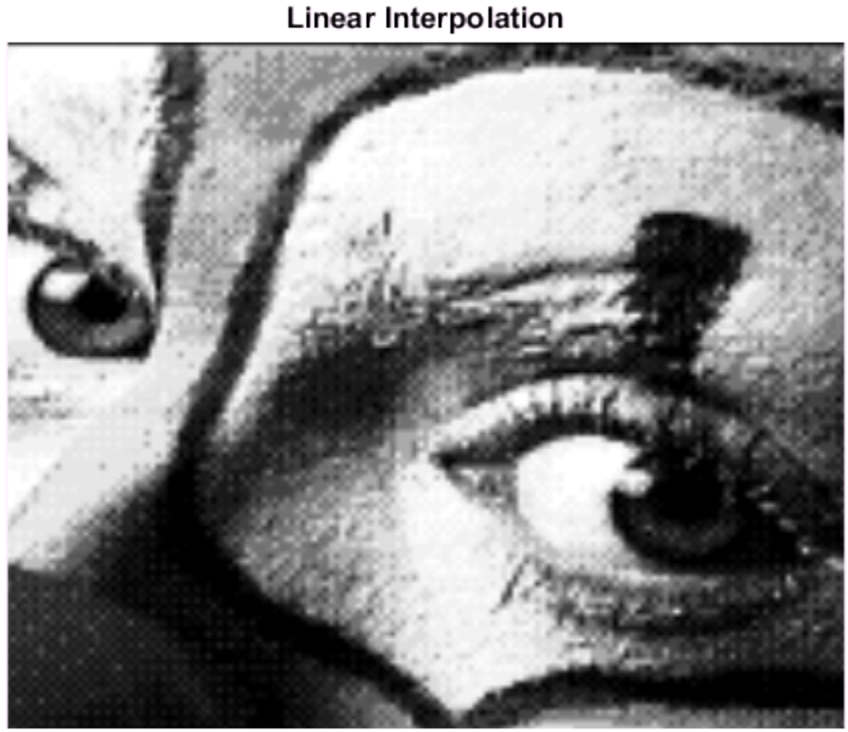

Evaluate Outside the Domain of X and Y

Coarsely sample a function over the range, `[-2, 2]` in both dimensions.

```
[X,Y] = meshgrid(-2:0.75:2);
R = sqrt(X.^2 + Y.^2)+ eps;
V = sin(R)./(R);
```

Plot the coarse sampling.

```
figure
```

```
surf(X,Y,V)
xlim([-4 4])
ylim([-4 4])
title('Original Sampling')
```

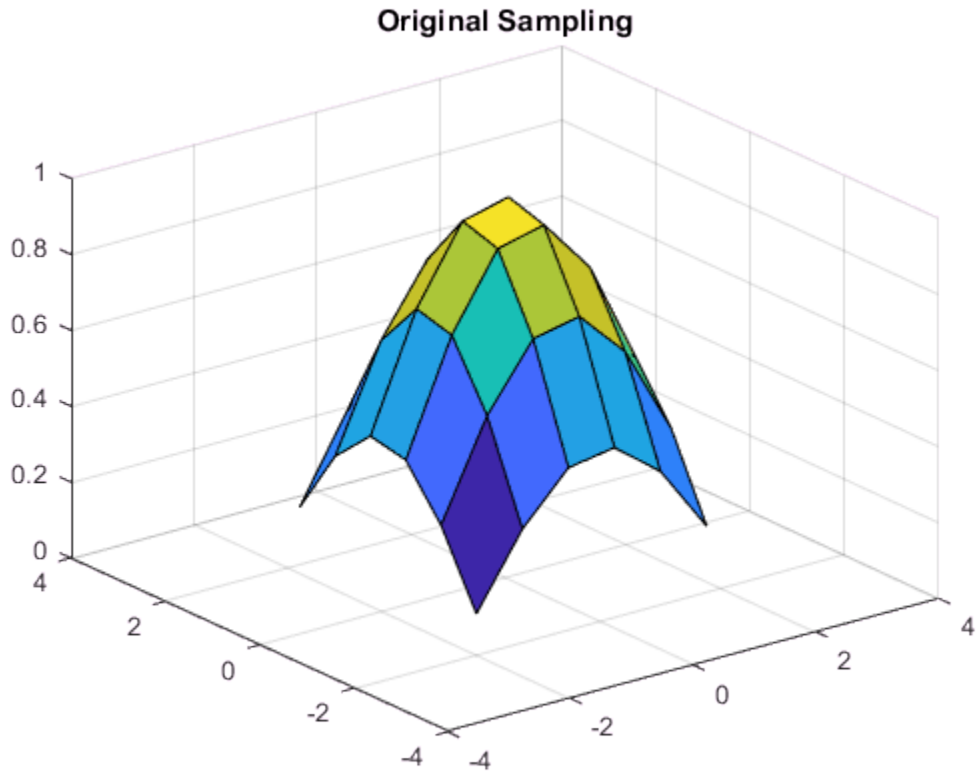

Create the query grid that extends beyond the domain of X and Y.

```
[Xq,Yq] = meshgrid(-3:0.2:3);
```

Perform cubic interpolation within the domain of X and Y, and assign all queries that fall outside to zero.

```
Vq = interp2(X,Y,V,Xq,Yq,'cubic',0);
```

Plot the result.

```
figure
surf(Xq,Yq,Vq)
title('Cubic Interpolation with Vq=0 Outside Domain of X and Y');
```

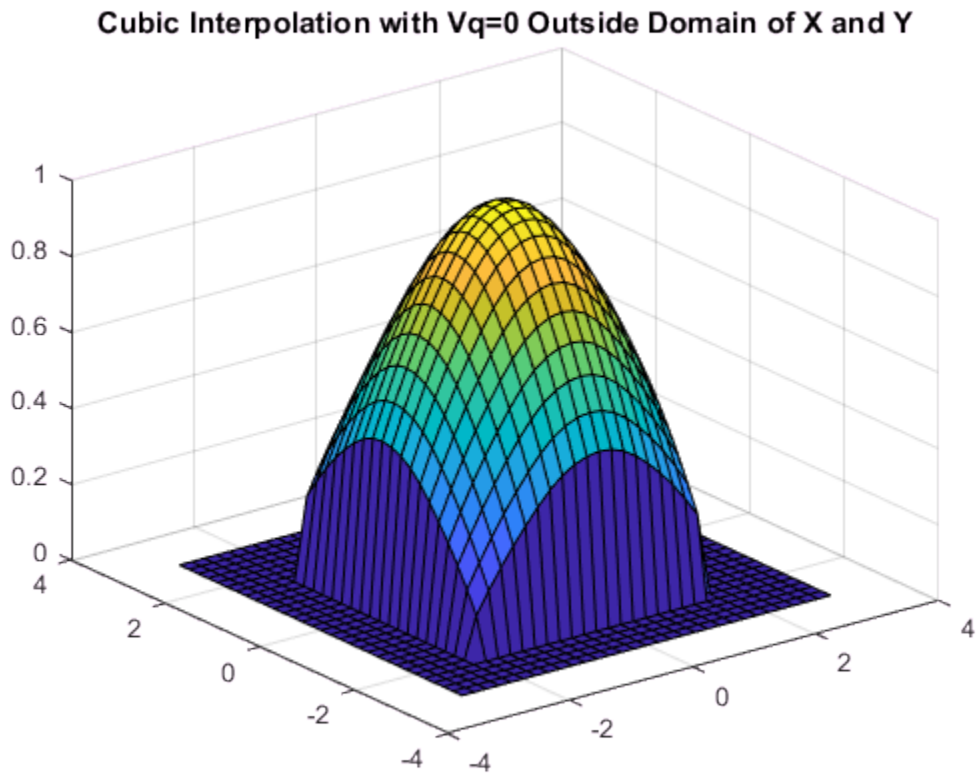

Input Arguments

X,Y — Sample grid points

matrices | vectors

Sample grid points, specified as real matrices or vectors. The sample grid points must be unique.

- If X and Y are matrices, then they contain the coordinates of a full grid (in meshgrid format). Use the `meshgrid` function to create the X and Y matrices together. Both matrices must be the same size.
- If X and Y are vectors, then they are treated as a grid vectors. The values in both vectors must be strictly monotonic and increasing.

Note: In a future release, `interp2` will not accept mixed combinations of row and column vectors for the sample and query grids. Instead, you must construct the full grid using `meshgrid`. Alternatively, if you have a large data set, you can use `griddedInterpolant` instead of `interp2`.

Example: `[X,Y] = meshgrid(1:30,-10:10)`

Data Types: `single` | `double`

V — Sample values

matrix

Sample values, specified as a real or complex matrix. The size requirements for V depend on the size of X and Y:

- If X and Y are matrices representing a full grid (in `meshgrid` format), then V must be the same size as X and Y.
- If X and Y are grid vectors, then V must be a matrix containing `length(Y)` rows and `length(X)` columns.

If V contains complex numbers, then `interp2` interpolates the real and imaginary parts separately.

Example: `rand(10,10)`

Data Types: `single` | `double`
Complex Number Support: Yes

Xq,Yq — Query points

scalars | vectors | matrices | arrays

Query points, specified as a real scalars, vectors, matrices, or arrays.

- If Xq and Yq are scalars, then they are the coordinates of a single query point.

- If `Xq` and `Yq` are vectors of different orientations, then `Xq` and `Yq` are treated as grid vectors.
- If `Xq` and `Yq` are vectors of the same size and orientation, then `Xq` and `Yq` are treated as scattered points in 2-D space.
- If `Xq` and `Yq` are matrices, then they represent either a full grid of query points (in `meshgrid` format) or scattered points.
- If `Xq` and `Yq` are N-D arrays, then they represent scattered points in 2-D space.

Note: In a future release, `interp2` will not accept mixed combinations of row and column vectors for the sample and query grids. Instead, you must construct the full grid using `meshgrid`. Alternatively, if you have a large data set, you can use `griddedInterpolant` instead of `interp2`.

Example: `[Xq,Yq] = meshgrid((1:0.1:10),(-5:0.1:0))`

Data Types: `single` | `double`

k — Refinement factor

1 (default) | real, nonnegative, integer scalar

Refinement factor, specified as a real, nonnegative, integer scalar. This value specifies the number of times to repeatedly divide the intervals of the refined grid in each dimension. This results in `2^k-1` interpolated points between sample values.

If `k` is `0`, then `Vq` is the same as `V`.

`interp2(V,1)` is the same as `interp2(V)`.

The following illustration shows the placement of interpolated values (in red) among nine sample values (in black) for `k=2`.

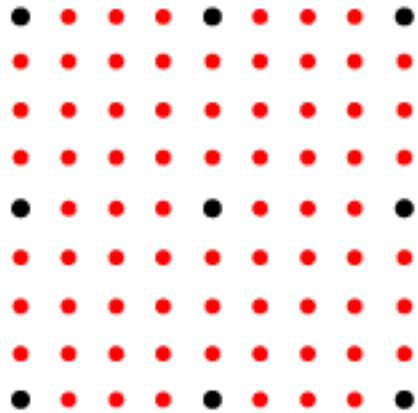

Example: `interp2(V,2)`

Data Types: `single` | `double`

`method` — Interpolation method
`'linear'` (default) | `'nearest'` | `'cubic'` | `'spline'`

Interpolation method, specified as an option from this table.

Method	Description	Continuity	Comments
`'linear'`	The interpolated value at a query point is based on linear interpolation of the values at neighboring grid points in each respective dimension. This is the default interpolation method.	C^0	• Requires at least two grid points in each dimension • Requires more memory than `'nearest'`
`'nearest'`	The interpolated value at a query point is the value at the nearest sample grid point.	Discontinuous	• Requires two grid points in each dimension. • Fastest computation with modest memory requirements
`'cubic'`	The interpolated value at a query point is based on a cubic	C^1	• Grid must have uniform spacing in each dimension,

Method	Description	Continuity	Comments
	interpolation of the values at neighboring grid points in each respective dimension. The interpolation is based on a cubic convolution.		but the spacing does not have to be the same for all dimensions • Requires at least four points in each dimension • Requires more memory and computation time than `'linear'`
`'spline'`	The interpolated value at a query point is based on a cubic interpolation of the values at neighboring grid points in each respective dimension. The interpolation is based on a cubic spline using not-a-knot end conditions.	C^2	• Requires four points in each dimension • Requires more memory and computation time than `'cubic'`

`extrapval` — Function value outside domain of `X` and `Y`
scalar

Function value outside domain of `X` and `Y`, specified as a real or complex scalar. `interp2` returns this constant value for all points outside the domain of `X` and `Y`.

Example: `5`

Example: `5+1i`

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

`Vq` — Interpolated values
scalar | vector | matrix

Interpolated values, returned as a real or complex scalar, vector, or matrix. The size and shape of `Vq` depends on the syntax you use and, in some cases, the size and value of the input arguments.

Syntaxes	Special Conditions	Size of Vq	Example

`interp2(X,Y,V,Xq,Yq)`
`interp2(V,Xq,Yq)`
and variations of these syntaxes that include `method` or `extrapval`
	`Xq`, `Yq` are scalars	Scalar	`size(Vq) = [1 1]` when you pass `Xq` and `Yq` as scalars.

Same as above	`Xq`, `Yq` are vectors of the same size and orientation	Vector of same size and orientation as `Xq` and `Yq`	If `size(Xq) = [100 1]` and `size(Yq) = [100 1]`, then `size(Vq) = [100 1]`.
Same as above	`Xq`, `Yq` are vectors of mixed orientation	Matrix in which the number of rows is `length(Yq)`, and the number of columns is `length(Xq)`	If `size(Xq) = [1 100]` and `size(Yq) = [50 1]`, then `size(Vq) = [50 100]`.
Same as above	`Xq`, `Yq` are matrices or arrays of the same size	Matrix or array of the same size as `Xq` and `Yq`	If `size(Xq) = [50 25]` and `size(Yq) = [50 25]`, then `size(Vq) = [50 25]`.
`interp2(V,k)` and variations of this syntax that include `method` or `extrapval`	None	Matrix in which the number of rows is: `2^k * (size(V,1)-1)+1`, and the number of columns is: `2^k * (size(V,2)-1)+1`	If `size(V) = [10 20]` and `k = 2`, then `size(Vq) = [37 77]`.

Definitions

Strictly Monotonic

A set of values that are always increasing or decreasing, without reversals. For example, the sequence, `a = [2 4 6 8]` is strictly monotonic and increasing. The sequence, `b = [2 4 4 6 8]` is not strictly monotonic because there is no change in value between `b(2)` and `b(3)`. The sequence, `c = [2 4 6 8 6]` contains a reversal between `c(4)` and `c(5)`, so it is not monotonic at all.

Full Grid (in meshgrid Format)

For `interp2`, the full grid is a pair of matrices whose elements represent a grid of points over a rectangular region. One matrix contains the x-coordinates, and the other matrix contains the y-coordinates. The values in the x-matrix are strictly monotonic and increasing along the rows. The values along its columns are constant. The values in the y-matrix are strictly monotonic and increasing along the columns. The values along its rows are constant. Use the `meshgrid` function to create a full grid that you can pass to `interp2`.

For example, the following code creates a full grid for the region, $-1 \le x \le 3$ and $1 \le y \le 4$:

```
[X,Y] = meshgrid(-1:3,(1:4))

X =

    -1     0     1     2     3
    -1     0     1     2     3
    -1     0     1     2     3
    -1     0     1     2     3

Y =

     1     1     1     1     1
     2     2     2     2     2
     3     3     3     3     3
     4     4     4     4     4
```

Grid Vectors

For `interp2`, grid vectors consist of a pair of vectors that define the x- and y-coordinates in a grid.

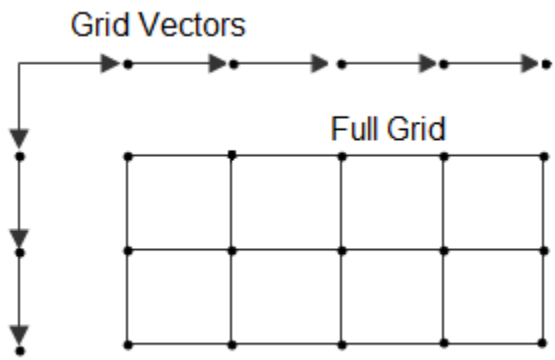

For example, the following code creates the grid vectors that specify the region, $-1 \le x \le 3$ and $1 \le y \le 4$:

```
x = -1:3;
y = (1:4)';
```

Scattered Points

For `interp2`, scattered points consist of a pair of arrays that define a collection of points scattered in 2-D space. One array contains the x-coordinates, and the other contains the y-coordinates.

For example, the following code specifies the points, (2,7), (5,3), (4,1), and (10,9):

```
x = [2 5; 4 10];
y = [7 3; 1 9];
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- `Xq` and `Yq` must be the same size. Use `meshgrid` to evaluate on a grid.
- For best results, provide `X` and `Y` as vectors.
- For the `'cubic'` method, if the grid does not have uniform spacing, an error results. In this case, use the `'spline'` method.
- For best results when you use the `'spline'` method:
  - Use `meshgrid` to create the inputs `Xq` and `Yq`.
  - Use a small number of interpolation points relative to the dimensions of `V`. Interpolating over a large set of scattered points can be inefficient.

See Also

See Also

`griddata` | `griddedInterpolant` | `interp1` | `interp3` | `interpn` | `meshgrid` | `scatteredInterpolant`

Introduced before R2006a

interp3

Interpolation for 3-D gridded data in meshgrid format

Syntax

```
Vq = interp3(X,Y,Z,V,Xq,Yq,Zq)
Vq = interp3(V,Xq,Yq,Zq)
Vq = interp3(V)
Vq = interp3(V,k)

Vq = interp3(___,method)
Vq = interp3(___,method,extrapval)
```

Description

`Vq = interp3(X,Y,Z,V,Xq,Yq,Zq)` returns interpolated values of a function of three variables at specific query points using linear interpolation. The results always pass through the original sampling of the function. `X`, `Y`, and `Z` contain the coordinates of the sample points. `V` contains the corresponding function values at each sample point. `Xq`, `Yq`, and `Zq` contain the coordinates of the query points.

`Vq = interp3(V,Xq,Yq,Zq)` assumes a default grid of sample points. The default grid points cover the region, `X=1:n`, `Y=1:m`, `Z=1:p`, where `[m,n,p] = size(V)`. Use this syntax when you want to conserve memory and are not concerned about the absolute distances between points.

`Vq = interp3(V)` returns the interpolated values on a refined grid formed by dividing the interval between sample values once in each dimension.

`Vq = interp3(V,k)` returns the interpolated values on a refined grid formed by repeatedly halving the intervals `k` times in each dimension. This results in `2^k-1` interpolated points between sample values.

`Vq = interp3(___,method)` specifies an optional, trailing input argument that you can pass with any of the previous syntaxes. `method` can be any of the following

that specify alternative interpolation methods: `'linear'`, `'nearest'`, `'cubic'`, or `'spline'`. The default method is `'linear'`.

`Vq = interp3( ___ ,method,extrapval)` also specifies `extrapval`, a scalar value that is assigned to all queries that lie outside the domain of the sample points.

If you omit the `extrapval` argument for queries outside the domain of the sample points, then based on the `method` argument `interp3` returns one of the following:

- The extrapolated values for the `'spline'` method
- `NaN` values for interpolation methods other than `'spline'`

Examples

Interpolate Using Default Method

Load the points and values of the flow function, sampled at 10 points in each dimension.

```
[X,Y,Z,V] = flow(10);
```

The `flow` function returns the grid in the arrays, `X`, `Y`, `Z`. The grid covers the region, $0.1 \le X \le 10$, $-3 \le Y \le 3$, $-3 \le Z \le 3$, and the spacing is $\Delta X = 0.5$, $\Delta Y = 0.7$, and $\Delta Z = 0.7$.

Now, plot slices through the volume of the sample at: `X=6`, `X=9`, `Y=2`, and `Z=0`.

```
figure
slice(X,Y,Z,V,[6 9],2,0);
shading flat
```

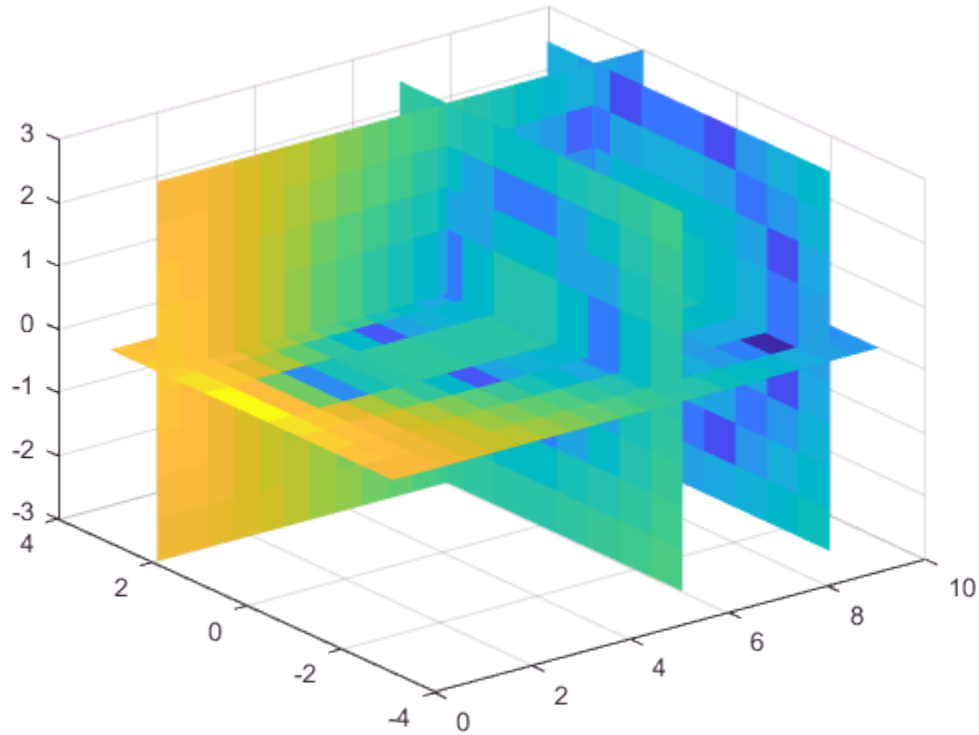

Create a query grid with spacing of 0.25.

```
[Xq,Yq,Zq] = meshgrid(.1:.25:10,-3:.25:3,-3:.25:3);
```

Interpolate at the points in the query grid and plot the results using the same slice planes.

```
Vq = interp3(X,Y,Z,V,Xq,Yq,Zq);
figure
slice(Xq,Yq,Zq,Vq,[6 9],2,0);
shading flat
```

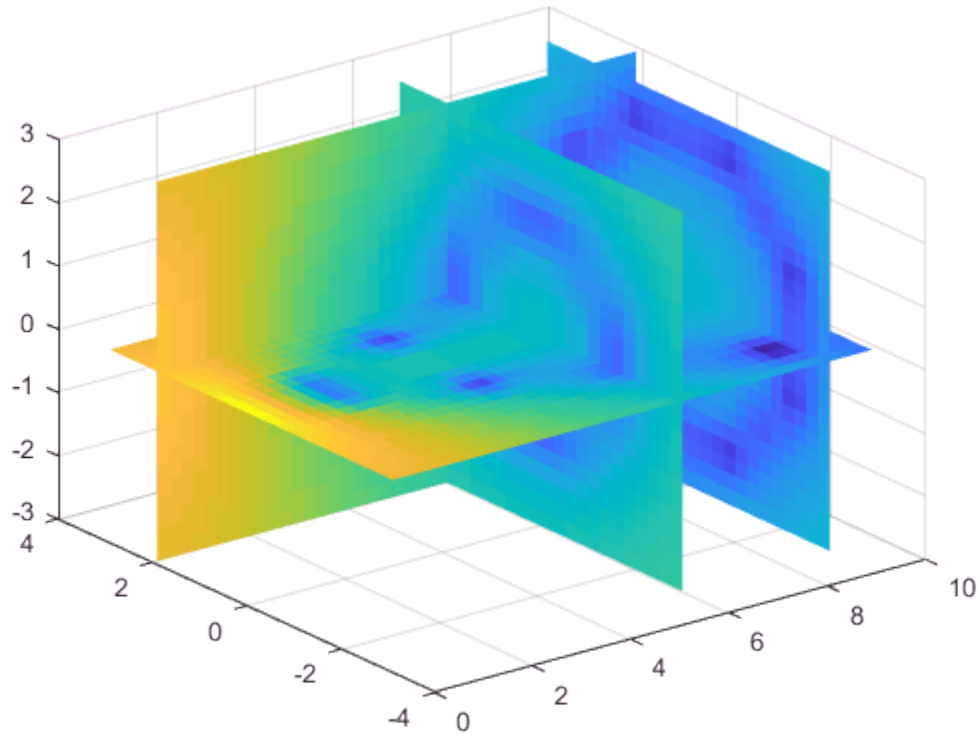

Interpolate Using Cubic Method

Load the points and values of the flow function, sampled at 10 points in each dimension.

```
[X,Y,Z,V] = flow(10);
```

The `flow` function returns the grid in the arrays, `X`, `Y`, `Z`. The grid covers the region, $0.1 \le X \le 10$, $-3 \le Y \le 3$, $-3 \le Z \le 3$, and the spacing is $\Delta X = 0.5$, $\Delta Y = 0.7$, and $\Delta Z = 0.7$.

Plot slices through the volume of the sample at: `X=6`, `X=9`, `Y=2`, and `Z =0`.

```
figure
slice(X,Y,Z,V,[6 9],2,0);
shading flat
```

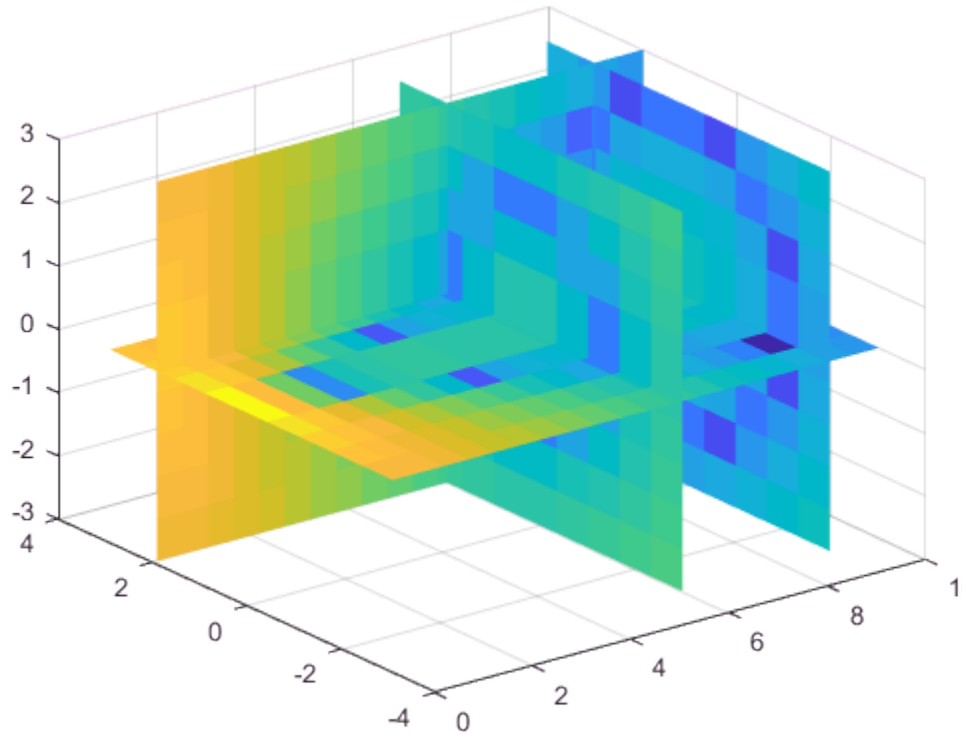

Create a query grid with spacing of 0.25.

```
[Xq,Yq,Zq] = meshgrid(.1:.25:10,-3:.25:3,-3:.25:3);
```

Interpolate at the points in the query grid using the `'cubic'` interpolation method. Then plot the results.

```
Vq = interp3(X,Y,Z,V,Xq,Yq,Zq,'cubic');
figure
slice(Xq,Yq,Zq,Vq,[6 9],2,0);
```

```
shading flat
```

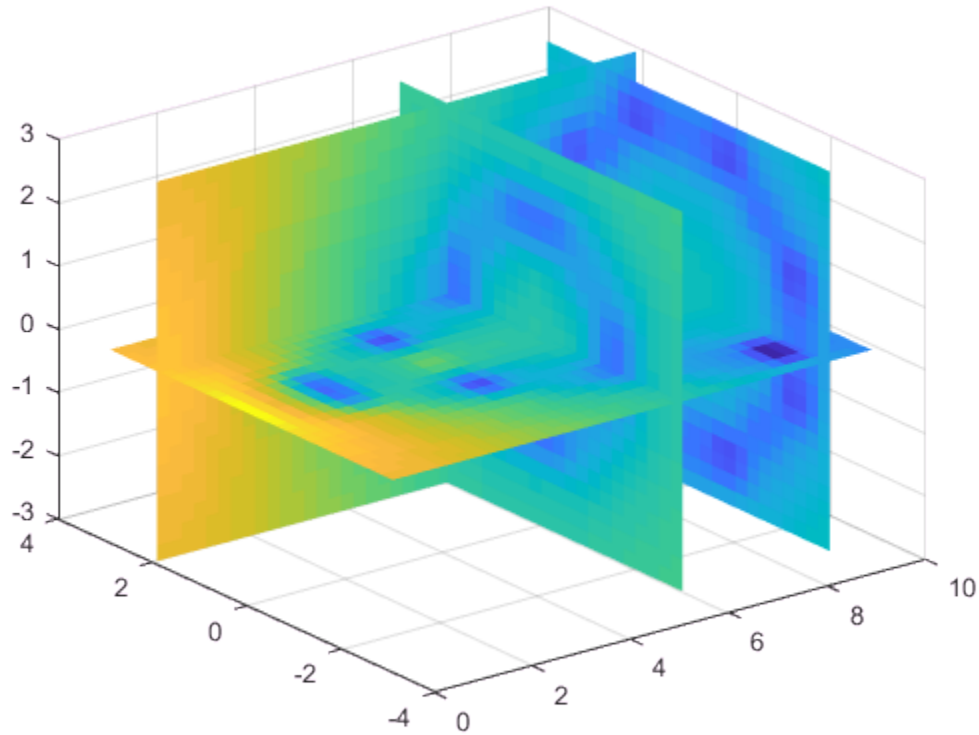

Evaluate Outside the Domain of X, Y, and Z

Create the grid vectors, `x`, `y`, and `z`. These vectors define the points associated with values in `V`.

```
x = 1:100;
y = (1:50)';
z = 1:30;
```

Define the sample values to be a 50-by-100-by-30 random number array, `V`. Use the `gallery` function to create the array.

```
V = gallery('uniformdata',50,100,30,0);
```

Evaluate V at three points outside the domain of x, y, and z. Specify extrapval = -1.

```
xq = [0 0 0];
yq = [0 0 51];
zq = [0 101 102];
vq = interp3(x,y,z,V,xq,yq,zq,'linear',-1)
```

```
vq =

    -1    -1    -1
```

All three points evaluate to -1 because they are outside the domain of x, y, and z.

Input Arguments

X,Y,Z — Sample grid points

arrays | vectors

Sample grid points, specified as real arrays or vectors. The sample grid points must be unique.

- If X, Y, and Z are arrays, then they contain the coordinates of a full grid (in meshgrid format). Use the meshgrid function to create the X, Y, and Z arrays together. These arrays must be the same size.
- If X, Y, and Z are vectors, then they are treated as a grid vectors. The values in these vectors must be strictly monotonic and increasing.

Note: In a future release, interp3 will not accept mixed combinations of row and column vectors for the sample and query grids. Instead, you must construct the full grid using meshgrid. Alternatively, if you have a large data set, you can use griddedInterpolant instead of interp3.

Example: [X,Y,Z] = meshgrid(1:30,-10:10,1:5)

Data Types: single | double

V — Sample values

array

Sample values, specified as a real or complex array. The size requirements for V depend on the size of X, Y, and Z:

- If X, Y, and Z are arrays representing a full grid (in meshgrid format), then the size of V matches the size of X, Y, or Z .
- If X, Y, and Z are grid vectors, then size(V) = [length(Y) length(X) length(Z)].

If V contains complex numbers, then interp3 interpolates the real and imaginary parts separately.

Example: rand(10,10,10)

Data Types: single | double
Complex Number Support: Yes

Xq,Yq,Zq — Query points

scalars | vectors | arrays

Query points, specified as a real scalars, vectors, or arrays.

- If Xq, Yq, and Zq are scalars, then they are the coordinates of a single query point in R^3.
- If Xq, Yq, and Zq are vectors of different orientations, then Xq, Yq, and Zq are treated as grid vectors in R^3.
- If Xq, Yq, and Zq are vectors of the same size and orientation, then Xq, Yq, and Zq are treated as scattered points in R^3.
- If Xq, Yq, and Zq are arrays of the same size, then they represent either a full grid of query points (in meshgrid format) or scattered points in R^3.

Note: In a future release, interp3 will not accept mixed combinations of row and column vectors for the sample and query grids. Instead, you must construct the full grid using meshgrid. Alternatively, if you have a large data set, you can use griddedInterpolant instead of interp3.

Example: [Xq,Yq,Zq] = meshgrid((1:0.1:10),(-5:0.1:0),3:5)

Data Types: `single` | `double`

`k` — Refinement factor

1 (default) | real, nonnegative, integer scalar

Refinement factor, specified as a real, nonnegative, integer scalar. This value specifies the number of times to repeatedly divide the intervals of the refined grid in each dimension. This results in `2^k-1` interpolated points between sample values.

If `k` is `0`, then `Vq` is the same as `V`.

`interp3(V,1)` is the same as `interp3(V)`.

The following illustration depicts `k=2` in one plane of R^3. There are 72 interpolated values in red and 9 sample values in black.

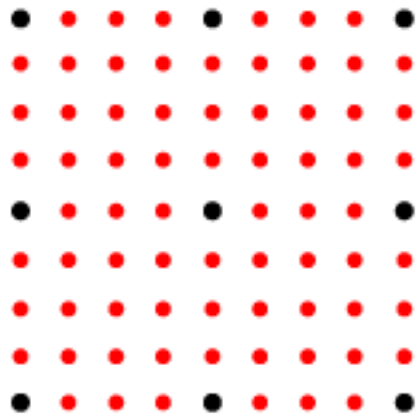

Example: `interp3(V,2)`

Data Types: `single` | `double`

`method` — Interpolation method

`'linear'` (default) | `'nearest'` | `'cubic'` | `'spline'`

Interpolation method, specified as an option from this table.

Method	Description	Continuity	Comments
`'linear'`	The interpolated value at a query point is based on linear interpolation of the values at neighboring grid points in each respective dimension. This is the default interpolation method.	C^0	• Requires at least two grid points in each dimension • Requires more memory than `'nearest'`
`'nearest'`	The interpolated value at a query point is the value at the nearest sample grid point.	Discontinuous	• Requires two grid points in each dimension • Fastest computation with modest memory requirements
`'cubic'`	The interpolated value at a query point is based on a cubic interpolation of the values at neighboring grid points in each respective dimension. The interpolation is based on a cubic convolution.	C^1	• Grid must have uniform spacing in each dimension, but the spacing does not have to be the same for all dimensions • Requires at least four points in each dimension • Requires more memory and computation time than `'linear'`
`'spline'`	The interpolated value at a query point is based on a cubic interpolation of the values at neighboring grid points in each respective dimension. The interpolation is based on a cubic spline using not-a-knot end conditions.	C^2	• Requires four points in each dimension • Requires more memory and computation time than `'cubic'`

`extrapval` — Function value outside domain of `X`, `Y`, and `Z`
scalar

Function value outside domain of `X`, `Y`, and `Z`, specified as a real or complex scalar. `interp3` returns this constant value for all points outside the domain of `X`, `Y`, and `Z`.

Example: 5

Example: `5+1i`

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

`Vq` — Interpolated values

scalar | vector | array

Interpolated values, returned as a real or complex scalar, vector, or array. The size and shape of `Vq` depends on the syntax you use and, in some cases, the size and value of the input arguments.

Syntaxes	Special Conditions	Size of Vq	Example
`interp3(X,Y,Z,V,Xq,Yq` `interp3(V,Xq,Yq,Zq)` and variations of these syntaxes that include `method` or `extrapval`	`Xq`, `Yq`, and `Zq` are scalars.	Scalar	`size(Vq) = [1 1]` when you pass `Xq`, `Yq`, and `Zq` as scalars.
Same as above	`Xq`, `Yq`, and `Zq` are vectors of the same size and orientation.	Vector of same size and orientation as `Xq`, `Yq`, and `Zq`	If `size(Xq) = [100 1]`, and `size(Yq) = [100 1]`, and `size(Zq) = [100 1]`, then `size(Vq) = [100 1]`.
Same as above	`Xq`, `Yq`, and `Zq` are vectors of mixed orientation.	`size(Vq) = [length(Y) length(X) length(Z)]`	If `size(Xq) = [1 100]`, and `size(Yq) = [50 1]`, and `size(Zq) = [1 5]`, then `size(Vq) = [50 100 5]`.
Same as above	`Xq`, `Yq`, and `Zq` are arrays of the same size.	Array of the same size as `Xq`, `Yq`, and `Zq`	If `size(Xq) = [50 25]`, and `size(Yq) = [50 25]`, and `size(Zq) = [50 25]`,

Syntaxes	Special Conditions	Size of Vq	Example
			then `size(Vq) = [50 25]`.
`interp3(V,k)` and variations of this syntax that include `method` or `extrapval`	None	Array in which the length of the `i`th dimension is `2^k * (size(V,i)-1)+1`	If `size(V) = [10 12 5]`, and `k = 3`, then `size(Vq) = [73 89 33]`.

Definitions

Strictly Monotonic

A set of values that are always increasing or decreasing, without reversals. For example, the sequence, `a = [2 4 6 8]` is strictly monotonic and increasing. The sequence, `b = [2 4 4 6 8]` is not strictly monotonic because there is no change in value between `b(2)` and `b(3)`. The sequence, `c = [2 4 6 8 6]` contains a reversal between `c(4)` and `c(5)`, so it is not monotonic at all.

Full Grid (in meshgrid Format)

For `interp3`, a full grid consists of three arrays whose elements represent a grid of points that define a region in R^3. The first array contains the x-coordinates, the second array contains the y-coordinates, and the third array contains the z-coordinates. The values in each array vary along a single dimension and are constant along the other dimensions.

The values in the x-array are strictly monotonic, increasing, and vary along the second dimension. The values in the y-array are strictly monotonic, increasing, and vary along the first dimension. The values in the z-array are strictly monotonic, increasing, and vary along the third dimension. Use the `meshgrid` function to create a full grid that you can pass to `interp3`.

Grid Vectors

For `interp3`, grid vectors consist of three vectors of mixed-orientation that define the points on a grid in R^3.

For example, the following code creates the grid vectors for the region, $1 \le x \le 3$, $4 \le y \le 5$, and $6 \le z \le 8$:

```
x = 1:3;
y = (4:5)';
z = 6:8;
```

Scattered Points

For `interp3`, scattered points consist of three arrays or vectors, `Xq`, `Yq`, and `Zq`, that define a collection of points scattered in R^3. The ith array contains the coordinates in the ith dimension.

For example, the following code specifies the points, (1, 19, 10), (6, 40, 1), (15, 33, 22), and (0, 61, 13).

```
Xq = [1 6; 15 0];
Yq = [19 40; 33 61];
Zq = [10 1; 22 13];
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- `Xq`, `Yq`, and `Zq` must be the same size. Use `meshgrid` to evaluate on a grid.
- For best results, provide `X`, `Y`, and `Z` as vectors.
- For the `'cubic'` method, if the grid does not have uniform spacing, an error results. In this case, use the `'spline'` method.
- For best results when you use the `'spline'` method:
  - Use `meshgrid` to create the inputs `Xq`, `Yq`, and `Zq`.
  - Use a small number of interpolation points relative to the dimensions of `V`. Interpolating over a large set of scattered points can be inefficient.

See Also

See Also

`interp1` | `interp2` | `interpn` | `meshgrid`

Introduced before R2006a

interpft

1-D interpolation (FFT method)

Syntax

```
y = interpft(X,n)
y = interpft(X,n,dim)
```

Description

`y = interpft(X,n)` interpolates the Fourier transform of the function values in `X` to produce `n` equally spaced points. `interpft` operates on the first dimension whose size does not equal 1.

`y = interpft(X,n,dim)` operates along dimension `dim`. For example, if `X` is a matrix, then `interpft(X,n,2)` operates on the rows of `X`.

Examples

Fourier Interpolation

Interpolate 1-D data using the FFT method and visualize the result.

Generate some sample points in the interval $[0, 3\pi]$ for the function $f(x) = \sin^2(x)\cos(x)$. Use a spacing interval `dx` to ensure the data is evenly spaced. Plot the sample points.

```
dx = 3*pi/30;
x = 0:dx:3*pi;
f = sin(x).^2 .* cos(x);
plot(x,f,'o')
```

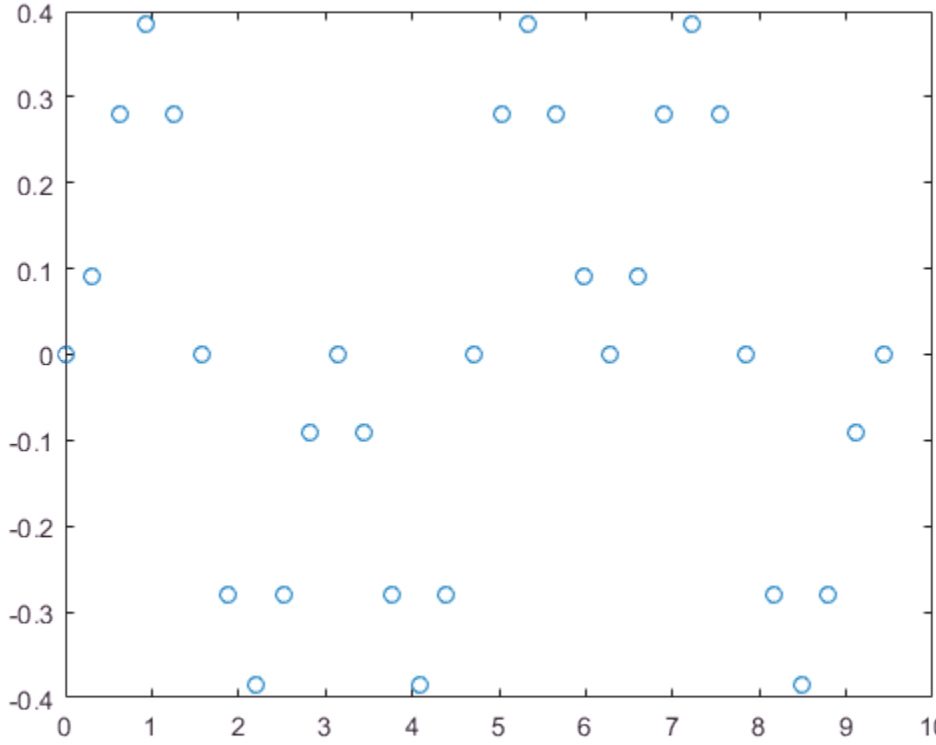

Use FFT interpolation to find the function value at 200 query points.

```
N = 200;
y = interpft(f,N);
```

Calculate the spacing of the interpolated data from the spacing of the sample points with `dy = dx*length(x)/N`, where `N` is the number of interpolation points. Truncate the data in `y` to match the sampling density of `x2`.

```
dy = dx*length(x)/N;
x2 = 0:dy:3*pi;
y = y(1:length(x2));
```

Plot the results.

```
hold on
plot(x2,y,'.')
title('FFT Interpolation of Periodic Function')
```

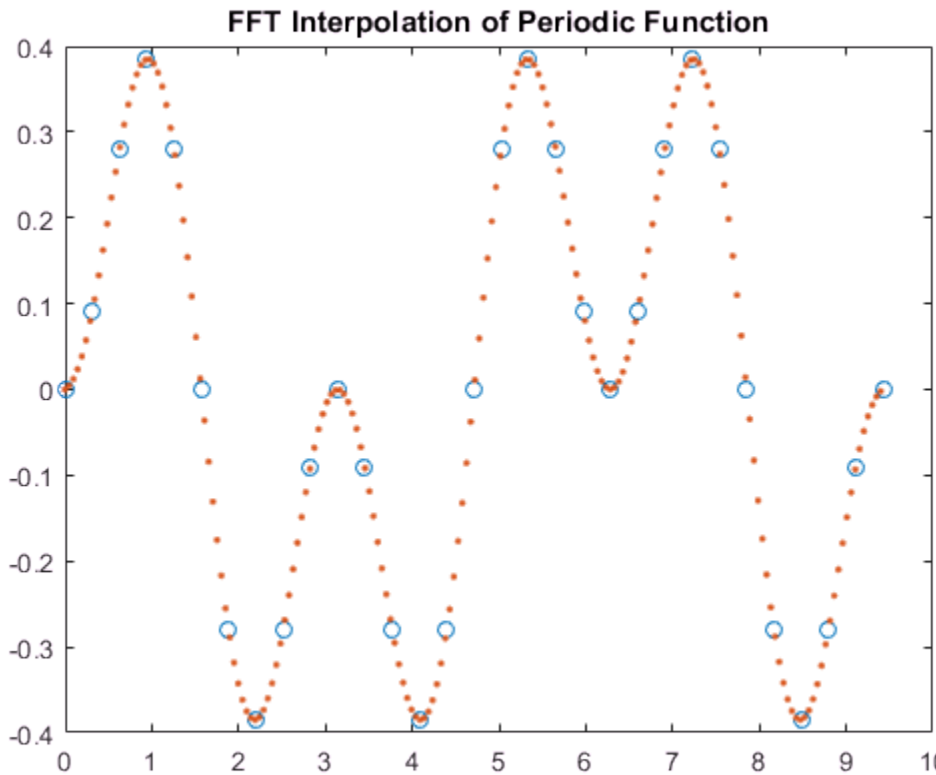

Interpolate Rows of Data

Generate three separate data sets of normally distributed random numbers. Assume the data is sampled at the positive integers, `1:N`. Store the data sets as rows in a matrix.

```
A = randn(3,20);
x = 1:20;
```

Interpolate the rows of the matrix at 500 query points each. Specify `dim = 2` so that `interpft` works on the rows of `A`.

```
N = 500;
y = interpft(A,N,2);
```

Calculate the spacing interval of the interpolated data `dy`. Truncate the data in `y` to match the sampling density of `x2`.

```
dy = length(x)/N;
x2 = 1:dy:20;
y = y(:,1:length(x2));
```

Plot the results.

```
subplot(3,1,1)
plot(x,A(1,:)','o');
hold on
plot(x2,y(1,:)','--')
title('Row 1')

subplot(3,1,2)
plot(x,A(2,:)','o');
hold on
plot(x2,y(2,:)','--')
title('Row 2')

subplot(3,1,3)
plot(x,A(3,:)','o');
hold on
plot(x2,y(3,:)','--')
title('Row 3')
```

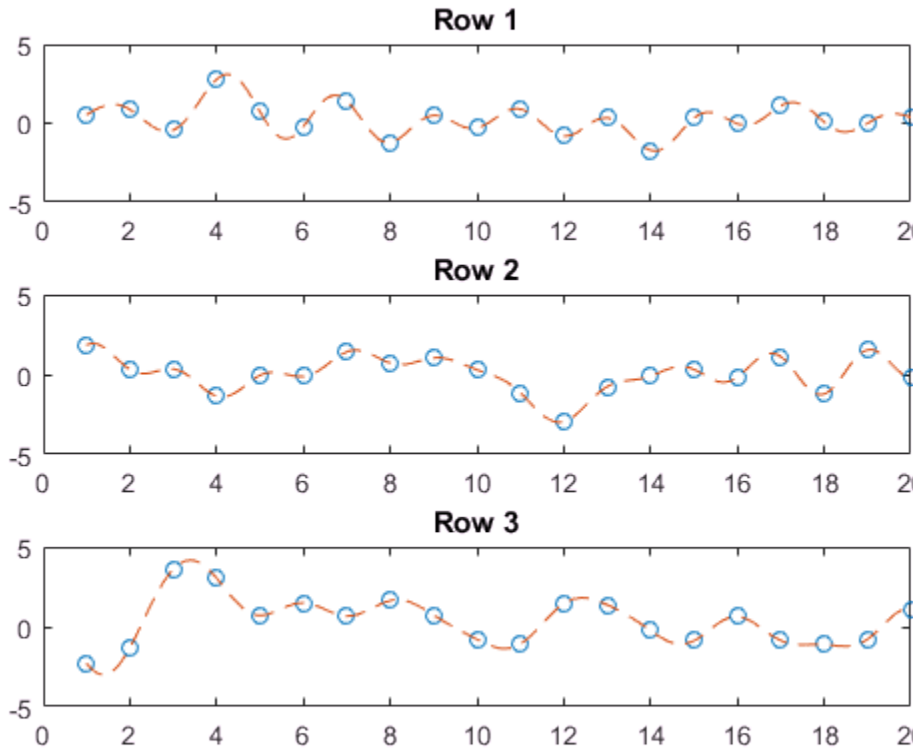

Input Arguments

X — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array. The data in `X` is assumed to be sampled at an evenly spaced interval of the independent variable. `interpft` works best with periodic data.

Data Types: `single` | `double`

Complex Number Support: Yes

n — Number of points
positive integer scalar

Number of points, specified as a positive integer scalar.

Data Types: `single` | `double`

dim — Dimension to operate along
positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

- `interpft(X,n,1)` interpolates the columns of `X`.



- `interpft(X,n,2)` interpolates the rows of `X`.



Example: `interpft(X,n,3)`

Output Arguments

y — Interpolated points

vector | matrix | multidimensional array

Interpolated points, returned as a vector, matrix, or multidimensional array. If `length(X,dim) = m`, and `X` has a sampling interval of `dx`, then the new sampling interval for `y` is `dy = dx*m/n`, where `n > m`.

If `dim` is specified, then `interpft` pads or truncates `X` to length `n` in dimension `dim`, so that `size(y,dim) = n`.

Algorithms

The `interpft` command uses the FFT method. The original vector `x` is transformed to the Fourier domain using `fft`, and then it is transformed back with more points.

See Also

See Also

`fft` | `interp1`

Introduced before R2006a

interpn

Interpolation for 1-D, 2-D, 3-D, and N-D gridded data in ndgrid format

Syntax

```
Vq = interpn(X1,X2,...,Xn,V,Xq1,Xq2,...,Xqn)
Vq = interpn(V,Xq1,Xq2,...,Xqn)
Vq = interpn(V)
Vq = interpn(V,k)

Vq = interpn(___,method)
Vq = interpn(___,method,extrapval)
```

Description

`Vq = interpn(X1,X2,...,Xn,V,Xq1,Xq2,...,Xqn)` returns interpolated values of a function of *n* variables at specific query points using linear interpolation. The results always pass through the original sampling of the function. `X1,X2,...,Xn` contain the coordinates of the sample points. `V` contains the corresponding function values at each sample point. `Xq1,Xq2,...,Xqn` contain the coordinates of the query points.

`Vq = interpn(V,Xq1,Xq2,...,Xqn)` assumes a default grid of sample points. The default grid consists of the points, 1,2,3,...n_i in each dimension. The value of n_i is the length of the ith dimension in `V`. Use this syntax to when you want to conserve memory and are not concerned about the absolute distances between points.

`Vq = interpn(V)` returns the interpolated values on a refined grid formed by dividing the interval between sample values once in each dimension.

`Vq = interpn(V,k)` returns the interpolated values on a refined grid formed by repeatedly halving the intervals `k` times in each dimension. This results in `2^k-1` interpolated points between sample values.

`Vq = interpn(___,method)` specifies an optional, trailing input argument that you can pass with any of the previous syntaxes. `method` can be any of the following that

specify alternative interpolation methods: `'linear'`, `'nearest'`, `'pchip'`,`'cubic'`, or `'spline'`. The default method is `'linear'`.

`Vq = interpn( ___ ,method,extrapval)` also specifies `extrapval`, a scalar value that is assigned to all queries that lie outside the domain of the sample points.

If you omit the `extrapval` argument for queries outside the domain of the sample points, then based on the `method` argument `interpn` returns one of the following:

- The extrapolated values for the `'spline'` method
- `NaN` values for interpolation methods other than `'spline'`

Examples

1-D Interpolation

Define the sample points and values.

```
x = [1 2 3 4 5];
v = [12 16 31 10 6];
```

Define the query points, `xq`, and interpolate.

```
xq = (1:0.1:5);
vq = interpn(x,v,xq,'cubic');
```

Plot the result.

```
figure
plot(x,v,'o',xq,vq,'-');
legend('Samples','Cubic Interpolation');
```

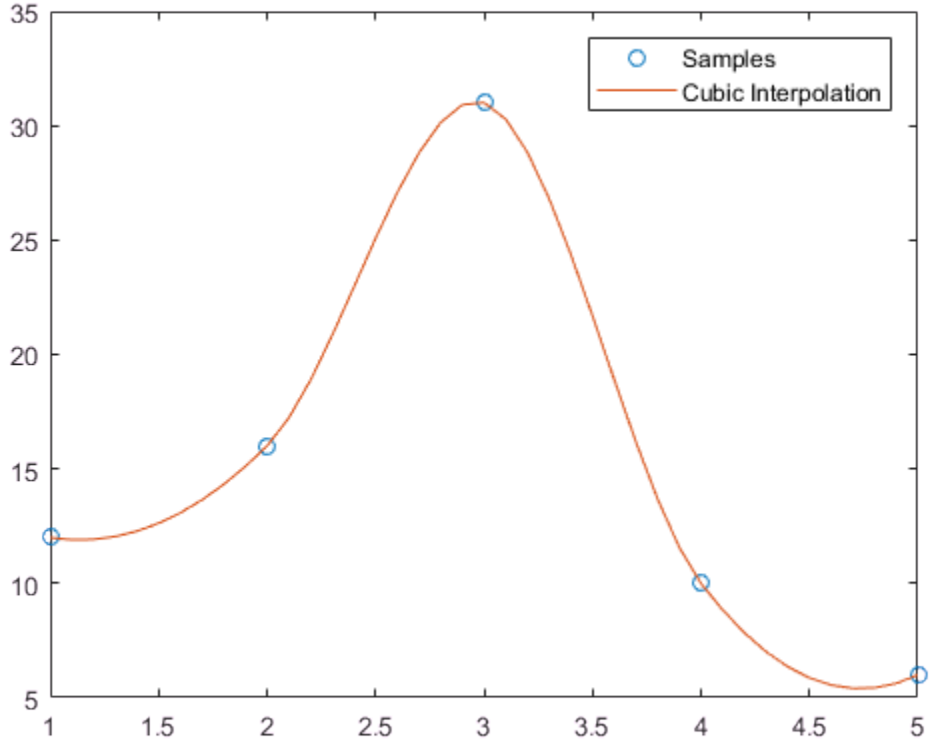

2-D Interpolation

Create a set of grid points and corresponding sample values.

```
[X1,X2] = ndgrid((-5:1:5));
R = sqrt(X1.^2 + X2.^2)+ eps;
V = sin(R)./(R);
```

Interpolate over a finer grid using `ntimes=1`.

```
Vq = interpn(V,'cubic');
mesh(Vq);
```

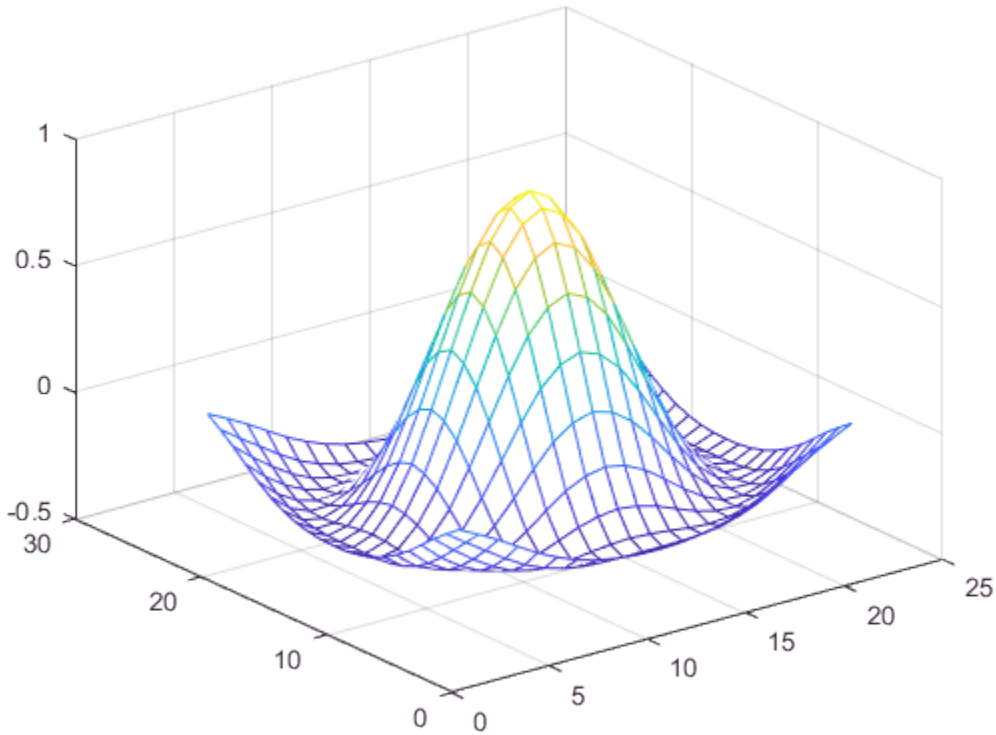

Evaluate Outside Domain of 3-D Function

Create the grid vectors, `x1`, `x2`, and `x3`. These vectors define the points associated with the values in `V`.

```
x1 = 1:100;
x2 = (1:50)';
x3 = 1:30;
```

Define the sample values to be a 100-by-50-by-30 random number array, `V`. Use the `gallery` function to create the array.

```
V = gallery('uniformdata',100,50,30,0);
```

Evaluate V at three points outside the domain of x1, x2, and x3. Specify extrapval = -1.

```
xq1 = [0 0 0];
xq2 = [0 0 51];
xq3 = [0 101 102];
vq = interpn(x1,x2,x3,V,xq1,xq2,xq3,'linear',-1)
```

```
vq =

    -1    -1    -1
```

All three points evaluate to -1 because they are outside the domain of x1, x2, and x3.

4-D Interpolation

Define an anonymous function that represents $f = te^{-x^2-y^2-z^2}$.

```
f = @(x,y,z,t) t.*exp(-x.^2 - y.^2 - z.^2);
```

Create a grid of points in R^4. Then, pass the points through the function to create the sample values, V.

```
[x,y,z,t] = ndgrid(-1:0.2:1,-1:0.2:1,-1:0.2:1,0:2:10);
V = f(x,y,z,t);
```

Now, create the query grid.

```
[xq,yq,zq,tq] = ...
ndgrid(-1:0.05:1,-1:0.08:1,-1:0.05:1,0:0.5:10);
```

Interpolate V at the query points.

```
Vq = interpn(x,y,z,t,V,xq,yq,zq,tq);
```

Create a movie to show the results.

```
figure('renderer','zbuffer');
nframes = size(tq, 4);
for j = 1:nframes
   slice(yq(:,:,:,j),xq(:,:,:,j),zq(:,:,:,j),...
         Vq(:,:,:,j),0,0,0);
   caxis([0 10]);
   M(j) = getframe;
end
```

```
movie(M);
```

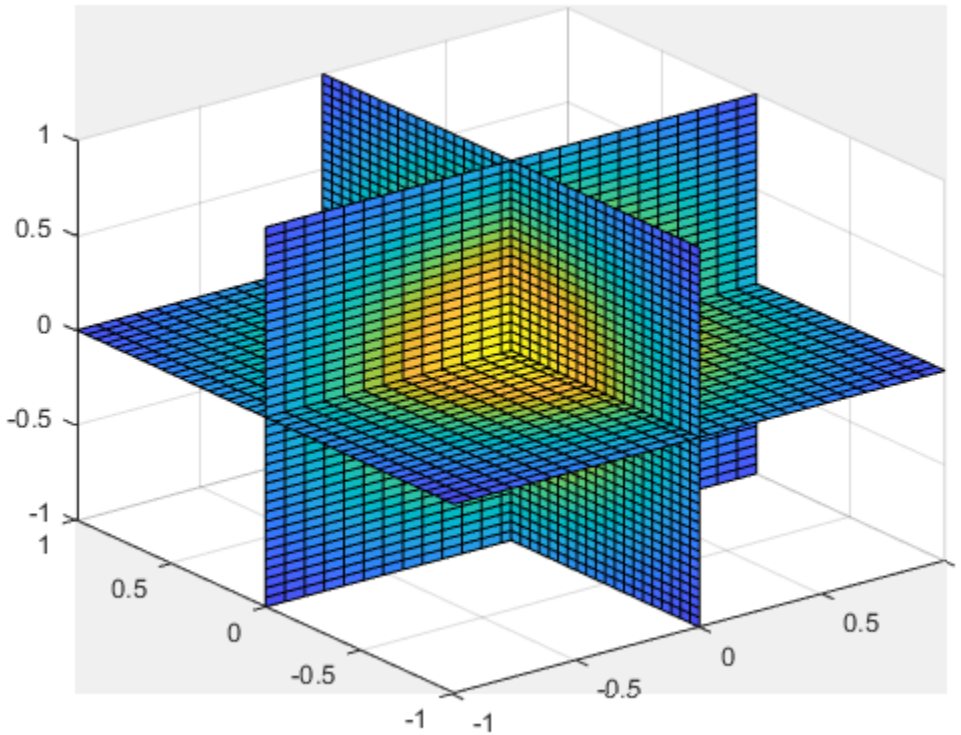

Input Arguments

X1,X2,...,Xn — Sample grid points

arrays | vectors

Sample grid points, specified as real arrays or vectors. The sample grid points must be unique.

- If X1,X2,...,Xn are arrays, then they contain the coordinates of a full grid (in ndgrid format). Use the ndgrid function to create the X1,X2,...,Xn arrays together. These arrays must be the same size.

- If `X1,X2,...,Xn` are vectors, then they are treated as grid vectors. The values in these vectors must be strictly monotonic and increasing.

Note: In a future release, `interpn` will not accept mixed combinations of row and column vectors for the sample and query grids. Instead, you must construct the full grid using `ndgrid`. Alternatively, if you have a large data set, you can use `griddedInterpolant` instead of `interpn`.

Example: `[X1,X2,X3,X4] = ndgrid(1:30,-10:10,1:5,10:13)`

Data Types: `single` | `double`

`V` — Sample values

array

Sample values, specified as a real or complex array. The size requirements for `V` depend on the size of `X1,X2,...,Xn`:

- If `X1,X2,...,Xn` are arrays representing a full grid (in `ndgrid` format), then the size of `V` matches the size of any array, `X1,X2,...,Xn`.
- If `X1,X2,...,Xn` are grid vectors, then `V` is an array whose `i`th dimension is the same length as grid vector `Xi`, where `i= 1,2,...n`.

If `V` contains complex numbers, then `interpn` interpolates the real and imaginary parts separately.

Example: `rand(10,5,3,2)`

Data Types: `single` | `double`
Complex Number Support: Yes

`Xq1,Xq2,...,Xqn` — Query points

scalars | vectors | arrays

Query points, specified as a real scalars, vectors, or arrays.

- If `Xq1,Xq2,...,Xqn` are scalars, then they are the coordinates of a single query point in R^n.
- If `Xq1,Xq2,...,Xqn` are vectors of different orientations, then `Xq1,Xq2,...,Xqn` are treated as grid vectors in R^n.

- If `Xq1,Xq2,...,Xqn` are vectors of the same size and orientation, then `Xq1,Xq2,...,Xqn` are treated as scattered points in R^n.
- If `Xq1,Xq2,...,Xqn` are arrays of the same size, then they represent either a full grid of query points (in `ndgrid` format) or scattered points in R^n.

Note: In a future release, `interpn` will not accept mixed combinations of row and column vectors for the sample and query grids. Instead, you must construct the full grid using `ndgrid`. Alternatively, if you have a large data set, you can use `griddedInterpolant` instead of `interpn`.

Example: `[X1,X2,X3,X4] = ndgrid(1:10,1:5,7:9,10:11)`

Example:

Data Types: `single` | `double`

k — Refinement factor

1 (default) | real, nonnegative, integer scalar

Refinement factor, specified as a real, nonnegative, integer scalar. This value specifies the number of times to repeatedly divide the intervals of the refined grid in each dimension. This results in `2^k-1` interpolated points between sample values.

If `k` is `0`, then `Vq` is the same as `V`.

`interpn(V,1)` is the same as `interpn(V)`.

The following illustration depicts `k=2` in R^2. There are 72 interpolated values in red and 9 sample values in black.

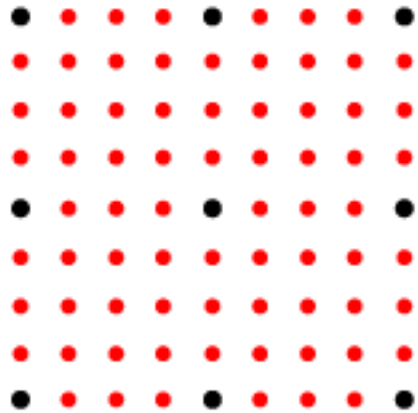

Example: `interpn(V,2)`

Data Types: `single` | `double`

`method` — Interpolation method
`'linear'` (default) | `'nearest'` | `'pchip'` | `'cubic'` | `'spline'`

Interpolation method, specified as an option from this table.

Method	Description	Continuity	Comments
`'linear'`	The interpolated value at a query point is based on linear interpolation of the values at neighboring grid points in each respective dimension. This is the default interpolation method.	C^0	• Requires at least two grid points in each dimension • Requires more memory than `'nearest'`
`'nearest'`	The interpolated value at a query point is the value at the nearest sample grid point.	Discontinuous	• Requires two grid points in each dimension. • Fastest computation with modest memory requirements
`'pchip'`	Shape-preserving piecewise cubic interpolation (for 1-D	C^1	• Requires at least four points

Method	Description	Continuity	Comments
	only). The interpolated value at a query point is based on a shape-preserving piecewise cubic interpolation of the values at neighboring grid points.		• Requires more memory and computation time than `'linear'`
`'cubic'`	The interpolated value at a query point is based on a cubic interpolation of the values at neighboring grid points in each respective dimension. The interpolation is based on a cubic convolution.	C^1	• Grid must have uniform spacing in each dimension, but the spacing does not have to be the same for all dimensions • Requires at least four points in each dimension • Requires more memory and computation time than `'linear'`
`'spline'`	The interpolated value at a query point is based on a cubic interpolation of the values at neighboring grid points in each respective dimension. The interpolation is based on a cubic spline using not-a-knot end conditions.	C^2	• Requires four points in each dimension • Requires more memory and computation time than `'cubic'`

`extrapval` — Function value outside domain of `X1,X2,...,Xn`
scalar

Function value outside domain of `X1,X2,...,Xn`, specified as a real or complex scalar. `interpn` returns this constant value for all points outside the domain of `X1,X2,...,Xn`.

Example: `5`

Example: `5+1i`

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Vq — Interpolated values

scalar | vector | array

Interpolated values, returned as a real or complex scalar, vector, or array. The size and shape of Vq depends on the syntax you use and, in some cases, the size and value of the input arguments.

Syntaxes	Special Conditions	Size of Vq	Example
interpn(X1,...,Xn,V,X interpn(V,Xq1,...,Xqn and variations of these syntaxes that include method or extrapval	Xq1,...,Xqn are scalars	Scalar	size(Vq) = [1 1] when you pass Xq1,...,Xqn as scalars.
Same as above	Xq1,...,Xqn are vectors of the same size and orientation	Vector of same size and orientation as Xq1,...,Xqn	In 3-D, if size(Xq1) = [100 1], and size(Xq2) = [100 1], and size(Xq3) = [100 1], then size(Vq) = [100 1].
Same as above	Xq1,...,Xqn are vectors of mixed orientation	size(Vq) = [length(Xq1),...,leng	In 3-D, if size(Xq1) = [1 100], and size(Xq2) = [50 1], and size(Xq3) = [1 5], then size(Vq) = [100 50 5].
Same as above	Xq1,...,Xqn are arrays of the same size	Array of the same size as Xq1,...,Xqn	In 3-D, if size(Xq1) = [50 25], and size(Xq2) = [50 25], and size(Xq3) = [50 25],

Syntaxes	Special Conditions	Size of Vq	Example
			then `size(Vq) = [50 25]`.
`interpn(V,k)` and variations of this syntax that include `method` or `extrapval`	None	Array in which the length of the `i`th dimension is `2^k * (size(V,i)-1)+1`,	In 3-D, if `size(V) = [10 12 5]`, and `k = 3`, then `size(Vq) = [73 89 33]`.

Definitions

Strictly Monotonic

A set of values that are always increasing or decreasing, without reversals. For example, the sequence, `a = [2 4 6 8]` is strictly monotonic and increasing. The sequence, `b = [2 4 4 6 8]` is not strictly monotonic because there is no change in value between `b(2)` and `b(3)`. The sequence, `c = [2 4 6 8 6]` contains a reversal between `c(4)` and `c(5)`, so it is not monotonic at all.

Full Grid (in ndgrid Format)

For `interpn`, the full grid consists of n arrays, `X1,X2,...,Xn`, whose elements represent a grid of points in R^n. The ith array, X_i, contains strictly monotonic, increasing values that vary most rapidly along the ith dimension.

Use the `ndgrid` function to create a full grid that you can pass to `interpn`. For example, the following code creates a full grid in R^2 for the region, $1 \le X1 \le 3$, $1 \le X2 \le 4$.

```
[X1,X2] = ndgrid(-1:3,(1:4))
```

```
X1 =

    -1    -1    -1    -1
     0     0     0     0
     1     1     1     1
     2     2     2     2
     3     3     3     3
```

```
X2 =

     1     2     3     4
     1     2     3     4
     1     2     3     4
     1     2     3     4
     1     2     3     4
```

Grid Vectors

For `interpn`, grid vectors consist of n vectors of mixed-orientation that define the points of a grid in R^n.

For example, the following code creates the grid vectors in R^3 for the region, $1 \le x1 \le 3$, $4 \le x2 \le 5$, and $6 \le x3 \le 8$:

```
x1 = 1:3;
x2 = (4:5)';
x3 = 6:8;
```

Scattered Points

For `interpn`, scattered points consist of n arrays or vectors, `Xq1,Xq2,...,Xqn`, that define a collection of points scattered in R^n. The `i`th array, `Xi`, contains the coordinates in the `i`th dimension.

For example, the following code specifies the points, (1, 19, 10), (6, 40, 1), (15, 33, 22), and (0, 61, 13) in R^3.

```
Xq1 = [1 6; 15 0];
Xq2 = [19 40; 33 61];
Xq3 = [10 1; 22 13];
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- For best results, provide `X1,X2,...,Xn` as vectors.
- Does not support the `'cubic'` or `'spline'` methods for 2-D and higher interpolation.
- The interpolation method must be a constant character vector.

See Also

See Also

`interp1` | `interp2` | `interp3` | `ndgrid`

Introduced before R2006a

interpstreamspeed

Interpolate stream-line vertices from flow speed

Syntax

```
interpstreamspeed(X,Y,Z,U,V,W,vertices)
interpstreamspeed(U,V,W,vertices)
interpstreamspeed(X,Y,Z,speed,vertices)
interpstreamspeed(speed,vertices)
interpstreamspeed(X,Y,U,V,vertices)
interpstreamspeed(U,V,vertices)
interpstreamspeed(X,Y,speed,vertices)
interpstreamspeed(speed,vertices)
interpstreamspeed(...,sf)
vertsout = interpstreamspeed(...)
```

Description

`interpstreamspeed(X,Y,Z,U,V,W,vertices)` interpolates streamline vertices based on the magnitude of the vector data `U`, `V`, `W`.

The arrays `X`, `Y`, and `Z`, which define the coordinates for `U`, `V`, and `W`, must be monotonic, but do not need to be uniformly spaced. `X`, `Y`, and `Z` must have the same number of elements, as if produced by `meshgrid`.

`interpstreamspeed(U,V,W,vertices)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X Y Z] = meshgrid(1:n,1:m,1:p)
```

where `[m n p] = size(U)`.

`interpstreamspeed(X,Y,Z,speed,vertices)` uses the 3-D array `speed` for the speed of the vector field.

`interpstreamspeed(speed,vertices)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X Y Z] = meshgrid(1:n,1:m,1:p)
```

where `[m n p]=size(speed)`.

`interpstreamspeed(X,Y,U,V,vertices)` interpolates streamline vertices based on the magnitude of the vector data `U`, `V`.

The arrays `X` and `Y`, which define the coordinates for `U` and `V`, must be monotonic, but do not need to be uniformly spaced. `X` and `Y` must have the same number of elements, as if produced by `meshgrid`.

`interpstreamspeed(U,V,vertices)` assumes `X` and `Y` are determined by the expression

```
[X Y] = meshgrid(1:n,1:m)
```

where `[M N]=size(U)`.

`interpstreamspeed(X,Y,speed,vertices)` uses the 2-D array `speed` for the speed of the vector field.

`interpstreamspeed(speed,vertices)` assumes `X` and `Y` are determined by the expression

```
[X Y] = meshgrid(1:n,1:m)
```

where `[M,N]= size(speed)`.

`interpstreamspeed(...,sf)` uses `sf` to scale the magnitude of the vector data and therefore controls the number of interpolated vertices. For example, if `sf` is 3, then `interpstreamspeed` creates only one-third of the vertices.

`vertsout = interpstreamspeed(...)` returns a cell array of vertex arrays.

Examples

Draw Streamlines Using Vertex Data

Draw streamlines using the vertices returned by `interpstreamspeed`. Dot markers indicate the location of each vertex. Streamlines with widely spaced vertices indicate faster flow. Those with closely spaced vertices indicate slower flow.

```
load wind
```

```
[sx,sy,sz] = meshgrid(80,20:1:55,5);
verts = stream3(x,y,z,u,v,w,sx,sy,sz);
iverts = interpstreamspeed(x,y,z,u,v,w,verts,0.2);
sl = streamline(iverts);
set(sl,'Marker','.');
axis tight;
view(2);
daspect([1 1 1]);
```

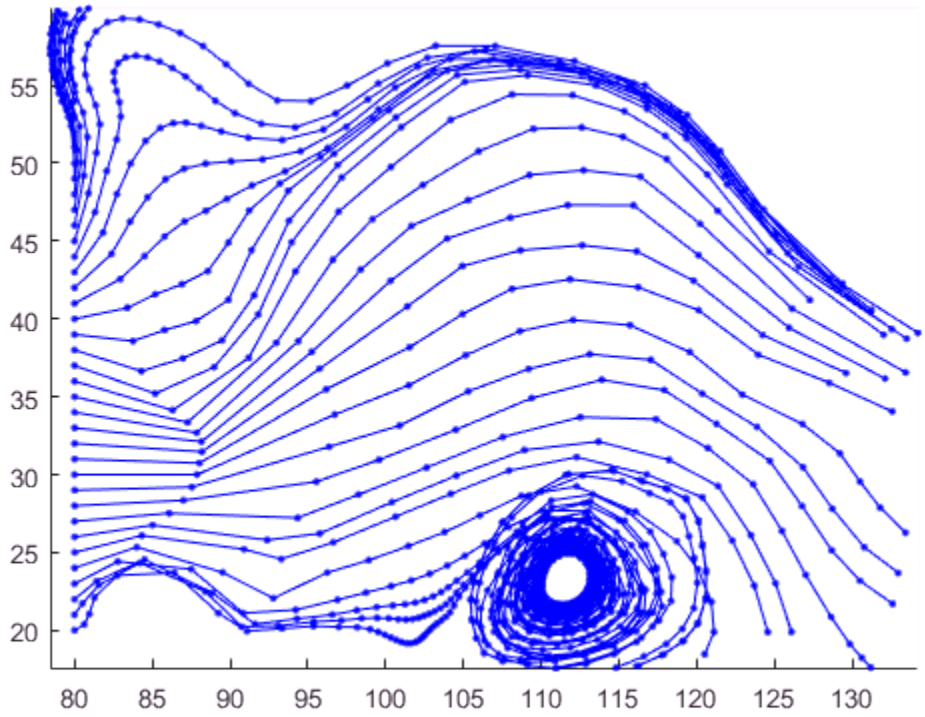

Vertex Spacing That Follows Streamline Gradient

Plot streamlines to show vertex spacing as it changes with the gradient along the streamline.

```
z = membrane(6,30);
[u,v] = gradient(z);
pcolor(z);
hold on
[verts,averts] = streamslice(u,v);
iverts = interpstreamspeed(u,v,verts,15);
sl = streamline(iverts);
set(sl,'Marker','.');
shading interp
axis tight
view(2);
daspect([1,1,1]);
hold off
```

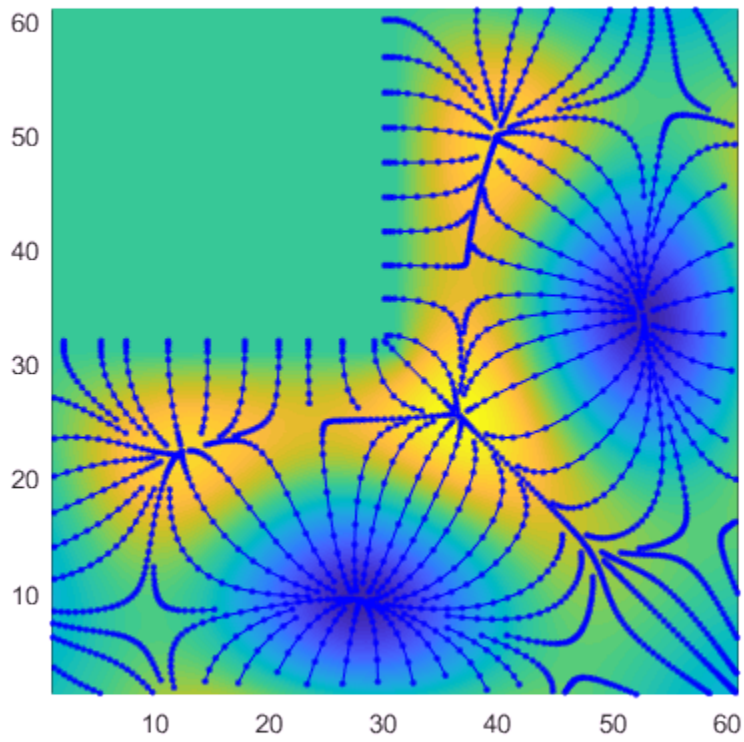

See Also

`stream2` | `stream3` | `streamline` | `streamslice` | `streamparticles`

Introduced before R2006a

intersect

Set intersection of two arrays

Syntax

```
C = intersect(A,B)
C = intersect(A,B,'rows')
[C,ia,ib] = intersect(A,B)
[C,ia,ib] = intersect(A,B,'rows')

[C,ia,ib] = intersect( ___ ,setOrder)

[C,ia,ib] = intersect(A,B,'legacy')
[C,ia,ib] = intersect(A,B,'rows','legacy')
```

Description

`C = intersect(A,B)` returns the data common to both `A` and `B`, with no repetitions. `C` is in sorted order.

- If `A` and `B` are tables or timetables, then `intersect` returns the set of rows common to both tables. For timetables, `intersect` takes row times into account to determine equality, and sorts the output timetable `C` by row times.

`C = intersect(A,B,'rows')` treats each row of `A` and each row of `B` as single entities and returns the rows common to both `A` and `B`, with no repetitions. `C` is in sorted order.

The `'rows'` option does not support cell arrays, unless one of the inputs is either a categorical array or a datetime array.

`[C,ia,ib] = intersect(A,B)` also returns index vectors `ia` and `ib`.

- Generally, `C = A(ia)` and `C = B(ib)`.
- If `A` and `B` are tables or timetables, then `C = A(ia,:)` and `C = B(ib,:)`.

`[C,ia,ib] = intersect(A,B,'rows')` also returns index vectors `ia` and `ib`, such that `C = A(ia,:)` and `C = B(ib,:)`.

`[C,ia,ib] = intersect( ___ ,setOrder)` returns `C` in a specific order using any of the input arguments in the previous syntaxes. `setOrder` can be `'sorted'` or `'stable'`:

- `'sorted'` — `C` is in sorted order. This is the default.
- `'stable'` — `C` is in the same order as `A`.

`[C,ia,ib] = intersect(A,B,'legacy')` and `[C,ia,ib] = intersect( A,B,'rows','legacy')` preserve the behavior of the `intersect` function from R2012b and prior releases.

The `'legacy'` option does not support categorical arrays, datetime arrays, duration arrays, tables, or timetables.

Examples

Intersection of Two Vectors

Create two vectors that have some values in common.

```
A = [7 1 7 7 4];
B = [7 0 4 4 0];
```

Find the values common to both `A` and `B`.

```
C = intersect(A,B)
```

```
C =

     4     7
```

Intersection of Two Tables

Create two tables with rows in common.

```
A = table([1:5]',categorical({'A';'B';'C';'D';'E'}),logical([0;1;0;1;0]))
```

```
A = 5×3 table
    Var1    Var2    Var3
    ____    ____    _____

    1       A       false
```

```
    2       B       true
    3       C       false
    4       D       true
    5       E       false
```

```
B = table([1:2:10]',categorical({'A';'C';'E';'G';'I'}),logical(zeros(5,1)))
```

```
B = 5×3 table
    Var1    Var2    Var3
    ____    ____    _____

    1       A       false
    3       C       false
    5       E       false
    7       G       false
    9       I       false
```

Find the rows common to both A and B.

```
C = intersect(A,B)
```

```
C = 3×3 table
    Var1    Var2    Var3
    ____    ____    _____

    1       A       false
    3       C       false
    5       E       false
```

Intersection of Two Vectors and Their Indices

Create two vectors with values in common.

```
A = [7 1 7 7 4];
B = [7 0 4 4 0];
```

Find the values common to both A and B, as well as the index vectors `ia` and `ib`, such that `C = A(ia)` and `C = B(ib)`.

```
[C,ia,ib] = intersect(A,B)
```

```
C =
```

```
     4     7


ia =

     5
     1


ib =

     3
     1
```

Intersection of Two Tables and Their Indices

Create a table, A, of gender, age, and height for five people.

```
A = table(categorical({'M';'M';'F';'M';'F'}),...
[27;52;31;46;35],[74;68;64;61;64],...
'VariableNames',{'Gender' 'Age' 'Height'},...
'RowNames',{'Ted' 'Fred' 'Betty' 'Bob' 'Judy'})
```

```
A = 5×3 table
             Gender    Age    Height
             ______    ___    ______

    Ted      M         27     74
    Fred     M         52     68
    Betty    F         31     64
    Bob      M         46     61
    Judy     F         35     64
```

Create a table, B, with rows in common with A.

```
B = table(categorical({'F';'M';'F';'F'}),...
[31;47;35;23],[64;68;62;58],...
'VariableNames',{'Gender' 'Age' 'Height'},...
'RowNames',{'Meg' 'Joe' 'Beth' 'Amy'})
```

```
B = 4×3 table
            Gender    Age    Height
```

```
            ______    ___    ______

    Meg     F         31     64
    Joe     M         47     68
    Beth    F         35     62
    Amy     F         23     58
```

Find the rows common to both A and B, as well as the index vectors ia and ib, such that C = A(ia,:) and C = B(ib,:).

```
[C,ia,ib] = intersect(A,B)
```

```
C = 1×3 table
            Gender    Age    Height
            ______    ___    ______

    Betty   F         31     64


ia = 3

ib = 1
```

Two rows that have the same values, but different names, are considered equal. Therefore, we discover that Betty, A(3,:), and Meg, B(1,:) have the same gender, age, and height.

Intersection of Rows in Two Matrices

Create two matrices with rows in common.

```
A = [2 2 2; 0 0 1; 1 2 3; 1 1 1];
B = [1 2 3; 2 2 2; 2 2 0];
```

Find the rows common to both A and B as well as the index vectors ia and ib, such that C = A(ia,:) and C = B(ib,:).

```
[C,ia,ib] = intersect(A,B,'rows')
```

```
C =

     1     2     3
     2     2     2
```

```
ia =

     3
     1


ib =

     1
     2
```

A and B do not need to have the same number of rows, but they must have the same number of columns.

Intersection with Specified Output Order

Use the `setOrder` argument to specify the ordering of the values in C.

Specify `'stable'` if you want the values in C to have the same order as in A.

```
A = [7 1 7 7 4]; B = [7 0 4 4 0];
[C,ia,ib] = intersect(A,B,'stable')
```

```
C =

     7     4


ia =

     1
     5


ib =

     1
     3
```

Alternatively, you can specify `'sorted'` order.

```
[C,ia,ib] = intersect(A,B,'sorted')
```

```
C =

     4     7


ia =

     5
     1


ib =

     3
     1
```

Intersection of Vectors Containing NaNs

Create two vectors containing NaN.

```
A = [5 NaN NaN];
B = [5 NaN NaN];
```

Find the values common to both A and B.

```
C = intersect(A,B)
```

```
C = 5
```

`intersect` treats NaN values as distinct.

Cell Array of Character Vectors with Trailing White Space

Create a cell array of character vectors, A.

```
A = {'dog','cat','fish','horse'};
```

Create a cell array of character vectors, B, where some of the vectors have trailing white space.

```
B = {'dog ','cat','fish ','horse'};
```

Find the character vectors common to both A and B.

```
[C,ia,ib] = intersect(A,B)
```

```
C = 1×2 cell array
    'cat'    'horse'


ia =

     2
     4


ib =

     2
     4
```

`intersect` treats trailing white space in cell arrays of character vectors as distinct characters.

Intersection of Arrays of Different Classes and Shapes

Create a column vector character array.

```
A = ['A';'B';'C'], class(A)
```

```
A = 3×1 char array
    'A
     B
     C'

ans =
'char'
```

Create a 2-by-3 matrix containing elements of numeric type `double`.

```
B = [65 66 67;68 69 70], class(B)
```

```
B =

    65    66    67
```

```
    68    69    70


ans =
'double'
```

Find the values common to both A and B.

```
[C,ia,ib] = intersect(A,B)
```

```
C = 3×1 char array
    'A
     B
     C'

ia =

     1
     2
     3


ib =

     1
     3
     5
```

`intersect` interprets B as a character array and returns a character array, C.

```
class(C)
```

```
ans =
'char'
```

Intersection of Char and Cell Array of Character Vectors

Create a character vector containing animal names that have three letters.

```
A = ['dog';'cat';'fox';'pig'];
class(A)
```

```
ans =
'char'
```

Create a cell array of character vectors containing animal names of varying lengths.

```
B = {'cat','dog','fish','horse'};
class(B)
```

```
ans =
'cell'
```

Find the character vectors common to both A and B.

```
C = intersect(A,B)
```

```
C = 2×1 cell array
    'cat'
    'dog'
```

The result, C, is a cell array of character vectors.

```
class(C)
```

```
ans =
'cell'
```

Preserve Legacy Behavior of intersect

Use the `'legacy'` flag to preserve the behavior of `intersect` from R2012b and prior releases in your code.

Find the intersection of A and B with the current behavior.

```
A = [7 1 7 7 4];
B = [7 0 4 4 0];
[C1,ia1,ib1] = intersect(A,B)
```

```
C1 =

     4     7


ia1 =

     5
     1
```

```
ib1 =

     3
     1
```

Find the unique elements of A and preserve the legacy behavior.

```
[C2,ia2,ib2] = intersect(A,B,'legacy')
```

```
C2 =

     4     7


ia2 =

     5     4


ib2 =

     4     1
```

Input Arguments

A,B — Input arrays

numeric arrays | logical arrays | character arrays | string arrays | categorical arrays | datetime arrays | duration arrays | cell arrays of character vectors | tables | timetables

Input arrays, specified as numeric arrays, logical arrays, character arrays, string arrays, categorical arrays, datetime arrays, duration arrays, cell arrays of character vectors, tables, or timetables. If you specify the `'rows'` option, A and B must have the same number of columns.

A and B must be of the same class with the following exceptions:

- `logical`, `char`, and all numeric classes can combine with `double` arrays.
- Cell arrays of character vectors can combine with character arrays or string arrays.

- Categorical arrays can combine with character arrays, cell arrays of character vectors, or string arrays.
- Datetime arrays can combine with cell arrays of date character vectors or single date character vectors.

There are additional requirements for A and B based on data type:

- If A and B are both ordinal categorical arrays, they must have the same sets of categories, including their order. If neither A nor B are ordinal, they need not have the same sets of categories, and the comparison is performed using the category names. In this case, the categories of C are the sorted union of the categories from A and B.
- If A and B are tables or timetables, they must have the same variable names (except for order). For tables, row names are ignored, so that two rows that have the same values, but different names, are considered equal. For timetables, row times are taken into account, so that two rows that have the same values, but different times, are not considered equal.
- If A and B are datetime arrays, they must be consistent with each other in whether they specify a time zone.

A and B also can be objects with the following class methods:

- `sort` (or `sortrows` for the `'rows'` option)
- `ne`

The object class methods must be consistent with each other. These objects include heterogeneous arrays derived from the same root class. For example, A and B can be arrays of handles to graphics objects.

`setOrder` — Order flag

`'sorted'` (default) | `'stable'`

Order flag, specified as `'sorted'` or `'stable'`, indicates the order of the values (or rows) in C.

Order Flag	Meaning
`'sorted'`	The values (or rows) in C return in sorted order. For example: `C = intersect([7 0 5],[7 1 5],'sorted')` returns `C = [5 7]`.

Order Flag	Meaning
`'stable'`	The values (or rows) in `C` return in the same order as they appear in `A` and `B`. For example: `C = intersect([7 0 5],[7 1 5],'stable')` returns `C = [7 5]`.

Output Arguments

`C` — Data common to `A` and `B`

vector | matrix | table | timetable

Data common to `A` and `B`, returned as a vector, matrix, or table. If the inputs `A` and `B` are tables or timetables, then the order of the variables in `C` is the same as the order of the variables in `A`.

The following describes the shape of `C` when the inputs are vectors or matrices and when the `'legacy'` flag is not specified:

- If the `'rows'` flag is not specified, then `C` is a column vector unless both `A` and `B` are row vectors, in which case `C` is a row vector.
- If the `'rows'` flag is specified, then `C` is a matrix containing the rows in common from `A` and `B`.

The class of the inputs `A` and `B` determines the class of `C`:

- If the class of `A` and `B` are the same, then `C` is the same class.
- If you combine a `char` or nondouble numeric class with `double`, then `C` is the same class as the nondouble input.
- If you combine a `logical` class with `double`, then `C` is `double`.
- If you combine a cell array of character vectors with `char`, then `C` is a cell array of character vectors.
- If you combine a categorical array with a character vector, cell array of character vectors, or string, then `C` is a categorical array.
- If you combine a datetime array with a cell array of date character vectors or single date character vector, then `C` is a datetime array.
- If you combine a string array with a character vector or cell array of character vectors, then `C` is a string array.

`ia` — Index to A
column vector

Index to A, returned as a column vector when the `'legacy'` flag is not specified. `ia` identifies the values (or rows) in A that are common to B. If there is a repeated value (or row) in A, then `ia` contains the index to the first occurrence of the value (or row).

`ib` — Index to B
column vector

Index to B, returned as a column vector when the `'legacy'` flag is not specified. `ib` identifies the values (or rows) in B that are common to A. If there is a repeated value (or row) in B, then `ib` contains the index to the first occurrence of the value (or row).

Tips

- To find the intersection with respect to a subset of variables from a table or timetable, you can use column subscripting. For example, you can use `intersect(A(:,vars),B(:,vars))`, where *`vars`* is a positive integer, a vector of positive integers, a variable name, a cell array of variable names, or a logical vector. Alternatively, you can use `vartype` to create a subscript that selects variables of a specified type.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not support cell arrays for the first or second arguments.
- When you do not specify the `'rows'` option:
  - Inputs A and B must be vectors. If you specify the `'legacy'` option, inputs A and B must be row vectors.

  - The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1.
  - The input `[]` is not supported. Use a 1-by-0 or 0-by-1 input, for example, `zeros(1,0)`, to represent the empty set.
  - If you specify the `'legacy'` option, then empty outputs are row vectors, 1-by-0. They are never 0-by-0.
- When you specify both the `'legacy'` option and the `'rows'` option, the outputs `ia` and `ib` are column vectors. If these outputs are empty, they are 0-by-1. They are never 0-by-0, even if the output `C` is 0-by-0.
- When the `setOrder` is `'sorted'` or when you specify the `'legacy'` option, the inputs must already be sorted in ascending order. The first output, `C`, is sorted in ascending order.
- Complex inputs must be `single` or `double`.
- When one input is complex and the other input is real, do one of the following:
  - Set `setOrder` to `'stable'`.
  - Sort the real input in complex ascending order (by absolute value). Suppose the real input is `x`. Use `sort(complex(x))` or `sortrows(complex(x))`.
- See "Code Generation for Complex Data with Zero-Valued Imaginary Parts" (MATLAB Coder).

See Also

See Also

`ismember` | `issorted` | `setdiff` | `setxor` | `sort` | `union` | `unique`

Topics

"Combine Categorical Arrays"

Introduced before R2006a

intmax

Largest value of specified integer type

Syntax

```
v = intmax
v = intmax('classname')
```

Description

`v = intmax` is the largest positive value that can be represented in the MATLAB software with a 32-bit integer. Any value larger than the value returned by `intmax` saturates to the `intmax` value when cast to a 32-bit integer.

`v = intmax('classname')` is the largest positive value in the integer class `classname`. Valid values for the string `classname` are

`'int8'`	`'int16'`	`'int32'`	`'int64'`
`'uint8'`	`'uint16'`	`'uint32'`	`'uint64'`

`intmax('int32')` is the same as `intmax` with no arguments.

Examples

Find the maximum value for a 64-bit signed integer:

```
v = intmax('int64')
v =
  9223372036854775807
```

Convert this value to a 32-bit signed integer:

```
x = int32(v)
x =
  2147483647
```

Compare the result with the default value returned by `intmax`:

```
isequal(x, intmax)
ans =
     1
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`intmin` | `realmax` | `realmin` | `int8` | `uint8` | `isa` | `class`

Introduced before R2006a

intmin

Smallest value of specified integer type

Syntax

```
v = intmin
v = intmin('classname')
```

Description

`v = intmin` is the smallest value that can be represented in the MATLAB software with a 32-bit integer. Any value smaller than the value returned by `intmin` saturates to the `intmin` value when cast to a 32-bit integer.

`v = intmin('classname')` is the smallest positive value in the integer class `classname`. Valid values for the string `classname` are

`'int8'`	`'int16'`	`'int32'`	`'int64'`
`'uint8'`	`'uint16'`	`'uint32'`	`'uint64'`

`intmin('int32')` is the same as `intmin` with no arguments.

Examples

Find the minimum value for a 64-bit signed integer:

```
v = intmin('int64')
v =

 -9223372036854775808
```

Convert this value to a 32-bit signed integer:

```
x = int32(v)
x =
```

```
 -2147483648
```

Compare the result with the default value returned by `intmin`:

```
isequal(x, intmin)
ans =

     1
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`intmax` | `realmin` | `realmax` | `int8` | `uint8` | `isa` | `class`

Introduced before R2006a

inv

Matrix inverse

Syntax

```
Y = inv(X)
```

Description

`Y = inv(X)` computes the inverse of square matrix `X`.

- `X^(-1)` is equivalent to `inv(X)`.
- `x = A\b` is computed differently than `x = inv(A)*b` and is recommended for solving systems of linear equations.

Examples

Inverse Matrix

Compute the inverse of a 3-by-3 matrix.

```
X = [1 0 2; -1 5 0; 0 3 -9]
```

```
X =

     1     0     2
    -1     5     0
     0     3    -9
```

```
Y = inv(X)
```

```
Y =

    0.8824   -0.1176    0.1961
    0.1765    0.1765    0.0392
```

```
    0.0588    0.0588   -0.0980
```

Check the results. Ideally, `Y*X` produces the identity matrix. Since `inv` performs the matrix inversion using floating-point computations, in practice `Y*X` is close to, but not exactly equal to, the identity matrix `eye(size(X))`.

```
Y*X
```

```
ans =

    1.0000         0   -0.0000
         0    1.0000   -0.0000
         0         0    1.0000
```

Solve Linear System

Examine why solving a linear system by inverting the matrix using `inv(A)*b` is inferior to solving it directly using the backslash operator, `x = A\b`.

Create a random matrix `A` of order 500 that is constructed so that its condition number, `cond(A)`, is `1e10`, and its norm, `norm(A)`, is `1`. The exact solution `x` is a random vector of length 500, and the right side is `b = A*x`. Thus the system of linear equations is badly conditioned, but consistent.

```
n = 500;
Q = orth(randn(n,n));
d = logspace(0,-10,n);
A = Q*diag(d)*Q';
x = randn(n,1);
b = A*x;
```

Solve the linear system `A*x = b` by inverting the coefficient matrix `A`. Use `tic` and `toc` to get timing information.

```
tic
y = inv(A)*b;
t = toc
```

```
t = 0.1474
```

Find the absolute and residual error of the calculation.

```
err_inv = norm(y-x)
```

```
err_inv = 5.0151e-06
```

```
res_inv = norm(A*y-b)
```

```
res_inv = 5.9404e-07
```

Now, solve the same linear system using the backslash operator \.

```
tic
z = A\b;
t1 = toc
```

```
t1 = 0.1327
```

```
err_bs = norm(z-x)
```

```
err_bs = 3.4433e-06
```

```
res_bs = norm(A*z-b)
```

```
res_bs = 3.6523e-15
```

The backslash calculation is quicker and has less residual error by several orders of magnitude. The fact that `err_inv` and `err_bs` are both on the order of `1e-6` simply reflects the condition number of the matrix.

The behavior of this example is typical. Using `A\b` instead of `inv(A)*b` is two to three times faster, and produces residuals on the order of machine accuracy relative to the magnitude of the data.

Input Arguments

X — Input matrix

square matrix

Input matrix, specified as a square matrix. If `X` is badly scaled or nearly singular, then the `inv` calculation loses numerical accuracy. Use `rcond` or `cond` to check the condition number of the matrix.

Data Types: `single` | `double`
Complex Number Support: Yes

Definitions

Matrix Inverse

A matrix `X` is invertible if there exists a matrix `Y` of the same size such that $XY = YX = I_n$, where I_n is the `n`-by-`n` identity matrix. The matrix `Y` is called the inverse of `X`.

A matrix that has no inverse is singular. A square matrix is singular only when its determinant is exactly zero.

Tips

- It is seldom necessary to form the explicit inverse of a matrix. A frequent misuse of `inv` arises when solving the system of linear equations $Ax = b$. One way to solve the equation is with `x = inv(A)*b`. A better way, from the standpoint of both execution time and numerical accuracy, is to use the matrix backslash operator `x = A\b`. This produces the solution using Gaussian elimination, without explicitly forming the inverse. See `mldivide` for further information.

Algorithms

`inv` performs an LU decomposition of the input matrix (or an LDL decomposition if the input matrix is Hermitian). It then uses the results to form a linear system whose solution is the matrix inverse `inv(X)`. For sparse inputs, `inv(X)` creates a sparse identity matrix and uses backslash, `X\speye(size(X))`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Singular matrix inputs can produce nonfinite values that differ from MATLAB results.

See Also

See Also

`det` | `lu` | `mldivide` | `rref`

Topics

"Inverses and Determinants"

Introduced before R2006a

invhilb

Inverse of Hilbert matrix

Syntax

```
H = invhilb(n)
```

Description

`H = invhilb(n)` generates the exact inverse of the exact Hilbert matrix for `n` less than about 15. For larger `n`, `invhilb(n)` generates an approximation to the inverse Hilbert matrix.

Limitations

The exact inverse of the exact Hilbert matrix is a matrix whose elements are large integers. These integers may be represented as floating-point numbers without roundoff error as long as the order of the matrix, `n`, is less than 15.

Comparing `invhilb(n)` with `inv(hilb(n))` involves the effects of two or three sets of roundoff errors:

- The errors caused by representing `hilb(n)`
- The errors in the matrix inversion process
- The errors, if any, in representing `invhilb(n)`

It turns out that the first of these, which involves representing fractions like 1/3 and 1/5 in floating-point, is the most significant.

Examples

Inverse Hilbert Matrix

Compute the fourth-order inverse Hilbert matrix.

```
invhilb(4)

ans =

          16        -120         240        -140
        -120        1200       -2700        1680
         240       -2700        6480       -4200
        -140        1680       -4200        2800
```

References

[1] Forsythe, G. E. and C. B. Moler, *Computer Solution of Linear Algebraic Systems*, Prentice-Hall, 1967, Chapter 19.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`hilb`

Introduced before R2006a

invoke

Invoke method on COM object or interface, or display methods

Syntax

```
S = invoke(h)
S = invoke(h,'methodname')
S = invoke(h,'methodname',arg1,arg2,...)
S = invoke(h,'custominterfacename')
```

Description

`S = invoke(h)` returns structure array, `S`, containing a list of all methods supported by the object or interface, `h`, along with the prototypes for these methods. If `S` is empty, either there are no properties or methods in the object, or MATLAB cannot read the object type library. Refer to the COM vendor documentation.

`S = invoke(h,'methodname')` invokes the method specified by `methodname`, and returns an output value, if any, in `S`. The data type of the return value depends on the invoked method, which is determined by the control or server.

`S = invoke(h,'methodname',arg1,arg2,...)` invokes the method specified by `methodname` with input arguments `arg1,arg2,...`.

`S = invoke(h,'custominterfacename')` returns an `Interface` object `S`, which is a handle to a custom interface implemented by the COM component. The `h` argument is a handle to the COM object. The `custominterfacename` argument is returned by the `interfaces` function.

If the method returns a COM interface, then the `invoke` function returns a new MATLAB COM object that represents the interface returned. For a description of how MATLAB converts COM types, see “Handle COM Data in MATLAB”.

COM functions are available on Microsoft Windows systems only.

Examples

Invoke the `Redraw` method in the `mwsamp` control.

```
f = figure('position',[100 200 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.1',[0 0 200 200],f);
h.Radius = 100;
invoke(h,'Redraw')
```

Alternatively, call the method directly.

```
Redraw(h)
```

Display all `mwsamp` methods.

```
invoke(h)
```

```
ans =
   AboutBox = void AboutBox(handle)
   Beep = void Beep(handle)
   FireClickEvent = void FireClickEvent(handle)
             .
             .
```

Getting a Custom Interface Example

Once you have created a COM server, you can query the server component to see if any custom interfaces are implemented. Use the `interfaces` function to return a list of all available custom interfaces:

```
h = actxserver('mytestenv.calculator');
customlist = interfaces(h)
```

```
customlist =
   ICalc1
   ICalc2
   ICalc3
```

To get a handle to the custom interface you want, use the `invoke` function.

```
c1 = invoke(h,'ICalc1')
```

```
c1 =
   Interface.Calc_1.0_Type_Library.ICalc_Interface
```

Use this handle with COM client functions to access the properties and methods of the object through the selected custom interface.

See Also

`methods` | `ismethod` | `interfaces`

Topics

"Handle COM Data in MATLAB"
"Custom Interfaces"

Introduced before R2006a

ipermute

Inverse permute dimensions of N-D array

Syntax

```
A = ipermute(B,order)
```

Description

`A = ipermute(B,order)` is the inverse of `permute`. `ipermute` rearranges the dimensions of `B` so that `permute(A,order)` will produce `B`. `B` has the same values as `A` but the order of the subscripts needed to access any particular element are rearranged as specified by `order`. All the elements of `order` must be unique.

Examples

Inverse Permute 3-D Array

Create a 2-by-2-by-3 array `A`, and compute its permutation `P` according to the vector `v`. The inverse permutation of `P` is equivalent to the original array `A`.

```
A = rand(2,2,3);
v = [3 2 1];
P = permute(A,v);
IP = ipermute(P,v);
isequal(A,IP)
```

```
ans = logical
   1
```

Tips

`permute` and `ipermute` are a generalization of transpose (`.'`) for multidimensional arrays.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

Permuting the tall dimension (dimension one) is not supported.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays for the first argument.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

`permute`

Introduced before R2006a

is*

Detect state

Description

These functions detect the state of MATLAB entities:

`isa`	Detect object of given MATLAB class or Java class
`isappdata`	Determine if object has specific application-defined data
`isbanded`	Determine if matrix is within specific bandwidth
`isbetween`	Array elements occurring within date and time interval
`iscalendarduration`	Determine if input is duration array
`iscategorical`	Determine whether input is categorical array
`iscategory`	Test for categorical array categories
`iscell`	Determine if input is cell array
`iscellstr`	Determine if input is cell array of strings
`ischar`	Determine if input is character array
`iscolumn`	Determine whether input is column vector
`iscom`	Determine if input is Component Object Model (COM) object
`isdatetime`	Determine if input is datetime array
`isdiag`	Determine if matrix is diagonal
`isdir`	Determine if input is folder
`isdst`	Datetime values occurring during daylight saving time
`isduration`	Determine if input is duration array
`isempty`	Determine if input is empty array
`isenum`	Determine if variable is enumeration
`isequal`	Determine if arrays are numerically equal
`isequaln`	Determine if arrays are numerically equal, treating `NaN`s as equal

isevent	Determine if input is Component Object Model (COM) object event
isfield	Determine if input is MATLAB structure array field
isfinite	Detect finite elements of array
isfloat	Determine if input is floating-point array
ishandle	Detect valid graphics object handles
ishermitian	Determine if matrix is Hermitian or skew-Hermitian
ishold	Determine if graphics hold state is on
isinf	Detect infinite elements of array
isinteger	Determine if input is integer array
isinterface	Determine if input is Component Object Model (COM) interface
isjava	Determine if input is Java object
iskeyword	Determine if input is MATLAB keyword
isletter	Detect elements that are alphabetic letters
islogical	Determine if input is logical array
ismac	Determine if running MATLAB for Macintosh OS X platform
ismatrix	Determine whether input is matrix
ismember	Detect members of specific set
ismethod	Determine if input is object method
ismissing	Find table elements with missing values
isnan	Detect elements of array that are not a number (NaN)
isnat	Determine NaT (Not-a-Time) elements
isnumeric	Determine if input is numeric array
isobject	Determine if input is MATLAB object
isordinal	Determine whether input is ordinal categorical array
ispc	Determine if running MATLAB for PC (Windows) platform
isprime	Detect prime elements of array
isprop	Determine if input is object property

isprotected	Determine whether categories of categorical array are protected
isreal	Determine if all array elements are real numbers
isregular	Determine whether times in timetable are regular
isrow	Determine whether input is row vector
isscalar	Determine if input is scalar
issorted	Determine if set elements are in sorted order
issortedrows	Determine if matrix or table rows are sorted
isspace	Detect space characters in array
issparse	Determine if input is sparse array
isstring	Determine if input is string array
isstrprop	Determine if string is of specified category
isstruct	Determine if input is MATLAB structure array
isstudent	Determine if Student Version of MATLAB
issymmetric	Determine if matrix is symmetric or skew-symmetric
istable	Determine whether input is table
istimetable	Determine whether input is timetable
istril	Determine if matrix is lower triangular
istriu	Determine if matrix is upper triangular
isundefined	Find undefined elements in categorical array
isunix	Determine if running MATLAB for UNIX[a] platform.
isvarname	Determine if input is valid variable name
isvector	Determine if input is vector
isweekend	Datetime values occurring during weekend

a. UNIX is a registered trademark of The Open Group in the United States and other countries.

See Also

isa | exist

isa

Determine if input is object of specified class

Syntax

```
tf = isa(obj,ClassName)
tf = isa(obj,classCategory)
```

Description

`tf = isa(obj,ClassName)` returns `true` if `obj` is an instance of the class specified by *`ClassName`*, and `false` otherwise. `isa` also returns true if `obj` is an instance of a class that is derived from *`ClassName`*.

`obj` can be any MATLAB variable.

`ClassName` can be any of the following:

- Name of any MATLAB class or fundamental type
- Name of a Java, or .NET class

The table shows the names of many commonly used MATLAB data types.

`'single'`	Single-precision number
`'double'`	Double-precision number
`'int8'`	Signed 8-bit integer
`'int16'`	Signed 16-bit integer
`'int32'`	Signed 32-bit integer
`'int64'`	Signed 64-bit integer
`'uint8'`	Unsigned 8-bit integer
`'uint16'`	Unsigned 16-bit integer
`'uint32'`	Unsigned 32-bit integer
`'uint64'`	Unsigned 64-bit integer

`'logical'`	Logical `1` (`true`) or `0` (`false`)
`'char'`	Character
`'string'`	String array
`'struct'`	Structure array
`'cell'`	Cell array
`'table'`	Table
`'function_handle'`	Function handle

`tf = isa(obj,classCategory)` returns `true` if `obj` is an instance of any of the classes in the specified *`classCategory`*, and `false` otherwise. `isa` also returns true if `obj` is an instance of a class that is derived from any of the classes in *`classCategory`*.

`classCategory` can be `'numeric'`, `'float'`, or `'integer'`, representing a category of numeric types:

`'numeric'`	Integer or floating-point array (`double`, `single`, `int8`, `uint8`, `int16`, `uint16`, `int32`, `uint32`, `int64`, `uint64`)
`'float'`	Single- or double-precision floating-point array (`double`, `single`)
`'integer'`	Signed or unsigned integer array (`int8`, `uint8`, `int16`, `uint16`, `int32`, `uint32`, `int64`, `uint64`)

To test for a sparse array, use `issparse`. To test for a complex array, use `~isreal`.

Examples

These examples show the values returned by `isa` when passed different types:

Determine if the value returned by the `pi` function is of class `double`:

```
isa(pi,'double')
```

```
ans =

     1
```

More generally, determine if the value returned by the `pi` function is a numeric value:

```
isa(pi,'numeric')

ans =

     1
```

`isa` also returns `true` for the `float` category because the class `double` is a floating-point type. However, `pi` does not return an integer type:

```
isa(pi,'integer')

ans =

     0
```

Determine if the 2-by-3 array returned by `true` is of type logical:

```
isa(true(2,3),'logical')

ans =

     1
```

Identify an instance of the MATLAB `containers.Map` class:

```
colorcodes = containers.Map({'Color','RGB'},...
    {'Yellow',uint8([255,255,0])});
isa(colorcodes,'containers.Map')

ans =

     1
```

The map key, `RGB`, references a `uint8` array:

```
isa(colorcodes('RGB'),'integer')

ans =

     1
```

Specifying a particular integer class provides more specific testing:

```
if strcmp(colorcodes('Color'),'Yellow') && ...
        isa(colorcodes('RGB'),'uint8')
```

```
    disp '''The Color is Yellow and the RGB numbers are uint8 values'''
end
'The Color is Yellow and the RGB numbers are uint8 values'
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`class` | `is*` | `isnumeric` | `isfloat` | `isinteger` | `exist`

Introduced before R2006a

isappdata

True if application-defined data exists

Syntax

```
tf = isappdata(h,name)
```

Description

`tf = isappdata(h,name)` returns `logical(1)` if application-defined data exists and these conditions are met:

- The application data has the specified `name` value.
- The application data is associated with the UI component, `h`.

Otherwise, `isappdata` returns `logical(0)`

See Also

`getappdata` | `rmappdata` | `setappdata`

Introduced before R2006a

isaUnderlying

Determine if tall array data is of specified class

Syntax

```
tf = isaUnderlying(X,cl)
```

Description

`tf = isaUnderlying(X,cl)` returns a tall array containing logical `1` (`true`) if the underlying data in tall array `X` is of class `cl`. Otherwise, the tall array contains logical `0` (`false`).

Examples

Test Underlying Class of Tall Arrays

All tall tables and arrays belong to the `tall` class. However, the *underlying* data type of a tall array can vary.

Create a datastore for the `airlinesmall.csv` data set. Select a subset of the variables to work with, and treat `'NA'` values as missing data so that `datastore` replaces them with `NaN` values. Convert the datastore into a tall table.

```
varnames = {'Year', 'UniqueCarrier'};
ds = datastore('airlinesmall.csv','TreatAsMissing','NA',...
    'SelectedVariableNames',varnames);
tt = tall(ds)
```

```
tt =

  M×2 tall table

    Year    UniqueCarrier
    ____    _____________

    1987    'PS'
```

```
    1987    'PS'
    1987    'PS'
    1987    'PS'
    1987    'PS'
    1987    'PS'
    1987    'PS'
    1987    'PS'
    :       :
    :       :
```

Test whether the underlying data type of the first table variable `Year` is `single`.

```
tf = isaUnderlying(tt.Year,'single')
```

```
tf =

  tall logical

   0
```

Determine the actual underlying data type of `Year`.

```
udt = classUnderlying(tt.Year)
```

```
udt =

  1×6 tall char array

    'double'
```

Input Arguments

X — Input array

tall array

Input array, specified as a tall array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `table` | `cell` | `categorical` | `datetime` | `duration` | `calendarDuration`

cl — Underlying class

character vector

Underlying class, specified as a character vector specifying any valid MATLAB class name.

Example: `tf = isaUnderlying(X,'double')`

Tips

- Use `classUnderlying` to determine the underlying data type of a tall array.

See Also

See Also

`classUnderlying` | `istall` | `tall`

Topics

"Tall Arrays"
"Functions That Support Tall Arrays (A–Z)"

Introduced in R2016b

isbanded

Determine if matrix is within specific bandwidth

Syntax

```
tf = isbanded(A,lower,upper)
```

Description

`tf = isbanded(A,lower,upper)` returns logical `1` (`true`) if matrix `A` is within the specified lower bandwidth, `lower`, and upper bandwidth, `upper`; otherwise, it returns logical `0` (`false`).

Examples

Test Square Matrix

Create a 5-by-5 square matrix with nonzero diagonals above and below the main diagonal.

```
A = [2 3 0 0 0 ; 1 -2 -3 0 0; 0 -1 2 3 0 ; 0 0 1 -2 -3; 0 0 0 -1 2]
```

```
A =

     2     3     0     0     0
     1    -2    -3     0     0
     0    -1     2     3     0
     0     0     1    -2    -3
     0     0     0    -1     2
```

Specify both bandwidths, `lower` and `upper`, as `1` to test if `A` is tridiagonal.

```
isbanded(A,1,1)
```

```
ans = logical
   1
```

The result is logical 1 (`true`).

Test if A has nonzero elements below the main diagonal by specifying `lower` as 0.

```
isbanded(A,0,1)
```

```
ans = logical
   0
```

The result is logical 0 (`false`) because A has nonzero elements below the main diagonal.

Test Nonsquare Matrix

Create a 3-by-5 matrix.

```
A = [1 0 0 0 0; 2 1 0 0 0; 3 2 1 0 0]
```

```
A =

     1     0     0     0     0
     2     1     0     0     0
     3     2     1     0     0
```

Test if A has nonzero elements above the main diagonal.

```
isbanded(A,2,0)
```

```
ans = logical
   1
```

The result is logical 1 (`true`) because the elements above the main diagonal are all zero.

Test Sparse Block Matrix

Create a 100-by-100 sparse block matrix.

```
B = kron(speye(25),ones(4));
```

Test if B has a lower and upper bandwidth of 1.

```
isbanded(B,1,1)
```

```
ans = logical
   0
```

The result is logical `0` (`false`) because the nonzero blocks centered on the main diagonal are larger than 2-by-2.

Test if `B` has a lower and upper bandwidth of `3`.

```
isbanded(B,3,3)
```

```
ans = logical
   1
```

The result is logical `1` (`true`). The matrix, `B`, has an upper and lower bandwidth of `3` since the nonzero diagonal blocks are 4-by-4.

Input Arguments

A — Input array
numeric array

Input array, specified as a numeric array. `isbanded` returns logical `0` (`false`) if `A` has more than two dimensions.

Data Types: `single` | `double`
Complex Number Support: Yes

`lower` — Lower bandwidth
nonnegative integer scalar

Lower bandwidth, specified as a nonnegative integer scalar. The lower bandwidth is the number of nonzero diagonals below the main diagonal. `isbanded` returns logical `0` (`false`) if there are nonzero elements below the boundary diagonal, `diag(A,-lower)`.

`upper` — Upper bandwidth
nonnegative integer scalar

Upper bandwidth, specified as a nonnegative integer scalar. The upper bandwidth is the number of nonzero diagonals above the main diagonal. `isbanded` returns logical `0` (`false`) if there are nonzero elements above the boundary diagonal, `diag(A,upper)`.

Tips

- Use the `bandwidth` function to find the upper and lower bandwidths of a given matrix.
- Use `isbanded` to test for several different matrix structures by specifying appropriate upper and lower bandwidths. The table below lists some common tests.

Lower Bandwidth	Upper Bandwidth	Function Call	Tests for
`0`	`0`	`isbanded(A,0,0)`	Diagonal matrix
`1`	`1`	`isbanded(A,1,1)`	Tridiagonal matrix
`0`	`size(A,2)`	`isbanded(A,0,size(A,`	Upper triangular matrix
`size(A,1)`	`0`	`isbanded(A,size(A,1)`	Lower triangular matrix
`1`	`size(A,2)`	`isbanded(A,1,size(A,`	Upper Hessenberg matrix
`size(A,1)`	`1`	`isbanded(A,size(A,1)`	Lower Hessenberg matrix

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`bandwidth` | `diag` | `isdiag` | `istril` | `istriu`

Introduced in R2014a

isbetween

Determine elements within date and time interval

Syntax

```
tf = isbetween(t,tlower,tupper)
```

Description

`tf = isbetween(t,tlower,tupper)` returns an array the same size as `t` containing logical `1` (true) where the corresponding element of `t` is a datetime that lies within the closed interval specified by the corresponding elements of `tlower` and `tupper`. The output `tf` indicates which elements of `t` satisfy:

```
tlower <= t <= tupper
```

Examples

Determine if Dates Occur Within Interval

Define a lower bound and an upper bound for dates.

```
tlower = datetime(2014,05,16)
```

```
tlower = datetime
   16-May-2014
```

```
tupper = '23-May-2014'
```

```
tupper =
'23-May-2014'
```

`tlower` and `tupper` can be `datetime` arrays or character vectors. Here, `tlower` is a `datetime` array and `tupper` is a single character vector.

Create an array of datetime values and determine if each datetime lies within the interval bounded by `tlower` and `tupper`.

```
t = tlower + caldays(2:2:10)
```

```
t = 1×5 datetime array
   18-May-2014   20-May-2014   22-May-2014   24-May-2014   26-May-2014
```

```
tf = isbetween(t,tlower,tupper)
```

```
tf = 1×5 logical array
   1   1   1   0   0
```

Input Arguments

`t` — Input date and time

`datetime` array | cell array of character vectors | character vector

Input date and time, specified as a `datetime` array, a cell array of character vectors, or a single character vector. Character vectors must be formatted to represent dates and times.

`tlower` — Lower bound of date and time interval

`datetime` array | cell array of character vectors | character vector

Lower bound of date and time interval, specified as a `datetime` array, a cell array of character vectors, or a single character vector. Character vectors must be formatted to represent dates and times.

`tupper` — Upper bound of date and time interval

`datetime` array | cell array of date strings | character vector

Upper bound of date and time interval, specified as a `datetime` array, a cell array of character vectors, or a single character vector. Character vectors must be formatted to represent dates and times.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

Tall character vector inputs are not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`ge` | `gt` | `ismember` | `le` | `lt`

Introduced in R2014b

iscalendarduration

Determine if input is calendar duration array

Syntax

```
tf = iscalendarduration(t)
```

Description

`tf = iscalendarduration(t)` returns logical `1` (`true`) if `t` is a `calendarDuration` array. Otherwise, it returns logical `0` (`false`).

Examples

Determine if Array Contains Calendar Duration Values

Determine if the output of an arithmetic calculation is a `calendarDuration` array.

Add two `calendarDuration` arrays.

```
d1 = calyears(1:4);
d2 = caldays(1:4);
d = d1 + d2
```

```
d = 1×4 calendarDuration array
   1y 1d   2y 2d   3y 3d   4y 4d
```

Determine if the output is a `calendarDuration` array.

```
tf = iscalendarduration(d)
```

```
tf = logical
   1
```

Input Arguments

`t` — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. `t` can be any data type.

See Also

See Also

`calendarDuration` | `isdatetime` | `isduration`

Introduced in R2014b

iscategorical

Determine whether input is categorical array

Syntax

```
tf = iscategorical(A)
```

Description

`tf = iscategorical(A)` returns logical `1` (`true`) if `A` is a categorical array. Otherwise, `iscategorical` returns logical `0` (`false`).

Examples

Determine Whether Workspace Variable Is Categorical Array

Create a workspace variable, `A`.

```
A = categorical({'red' 'green' 'violet'; 'orange' 'red' 'yellow'})
```

```
A = 2×3 categorical array
     red         green      violet
     orange      red        yellow
```

Verify that the workspace variable, `A`, is a categorical array.

```
tf = iscategorical(A)
```

```
tf = logical
   1
```

`A` is a 2-by-3 categorical array.

Input Arguments

A — Input variable
workspace variable

Input variable, specified as a workspace variable. A can be any data type.

See Also

See Also

`categorical` | `iscell` | `islogical` | `isnumeric` | `isobject` | `isstruct` | `istable`

Introduced in R2013b

iscategory

Test for categorical array categories

Syntax

```
tf = iscategory(A,catnames)
```

Description

`tf = iscategory(A,catnames)` returns an array containing logical `1` (`true`) where the data in `catnames` is a category of `A`. Otherwise, `iscategory` returns logical `0` (`false`).

`tf` is the same size as `catnames`.

Examples

Test for Categories

Create an ordinal categorical array, `A`.

```
A = categorical({'shirt' 'pants'; 'pants' 'hat'; 'shirt' 'pants'})
```

```
A = 3×2 categorical array
     shirt      pants
     pants      hat
     shirt      pants
```

`A` is a 3-by-2 categorical array.

Test if the articles of clothing, `shirt`, `pants`, `socks`, and `shoes`, are categories of `A`.

```
catnames = {'shirt' 'pants' 'socks' 'shoes'};
tf = iscategory(A,catnames)
```

```
tf = 1×4 logical array
```

```
   1   1   0   0
```

`shirt` and `pants` are categories of `A`, but `socks` and `shoes` are not.

`iscategory` does not tell us anything about the category, `hat`, which we did not include in `catnames`.

Test for Category with No Corresponding Data

Create a categorical array, `A`.

```
A = categorical({'plane' 'car' 'train' 'car' 'plane'},...
    {'boat' 'car' 'plane' 'train'})
```

```
A = 1×5 categorical array
     plane      car      train      car      plane
```

`A` is a 1-by-5 categorical array.

Test to see if `boat` is a category in `A`.

```
tf = iscategory(A,'boat')
```

```
tf = logical
   1
```

`iscategory` returns true, even though `A` does not contain any values from the category `boat`.

Input Arguments

`A` — Categorical array
vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

`catnames` — Category names
character vector | cell array of character vectors | categorical array

Category names, specified as a character vector, cell array of character vectors, or categorical array.

See Also

See Also

`addcats` | `categorical` | `categories` | `ismember` | `mergecats` | `removecats` | `renamecats` | `reordercats` | `setcats` | `unique`

Introduced in R2013b

iscell

Determine whether input is cell array

Syntax

```
tf = iscell(A)
```

Description

`tf = iscell(A)` returns logical `1` (`true`) if `A` is a cell array and logical `0` (`false`) otherwise.

Examples

```
A{1,1} = [1 4 3; 0 5 8; 7 2 9];
A{1,2} = 'Anne Smith';
A{2,1} = 3+7i;
A{2,2} = -pi:pi/10:pi;

iscell(A)

ans =

     1
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`cell` | `istable` | `iscellstr` | `isstruct` | `isnumeric` | `islogical` | `isobject` | `isa` | `is*`

Introduced before R2006a

iscellstr

Determine if input is cell array of character vectors

Syntax

```
tf = iscellstr(A)
```

Description

`tf = iscellstr(A)` returns logical `1` (`true`) if `A` is a cell array of character vectors (or an empty cell array), and logical `0` (`false`) otherwise. A cell array of character vectors is a cell array where every cell contains a character vector.

Examples

Determine if Array is Cell Array of Character Vectors

Create different arrays, and then determine if they are cell arrays of character vectors.

Test a cell array of character vectors.

```
C1 = {'Smith','Chung','Morales'; ...
      'Sanchez','Peterson','Adams'}
```

```
C1 = 2×3 cell array
    'Smith'      'Chung'       'Morales'
    'Sanchez'    'Peterson'    'Adams'
```

```
tf = iscellstr(C1)
```

```
tf = logical
   1
```

Every cell of `C1` contains a character vector, so `iscellstr` returns `1`.

Convert `C1` to a string array and test it.

```
str = string(C1)
```

```
str = 2×3 string array
    "Smith"      "Chung"       "Morales"
    "Sanchez"    "Peterson"    "Adams"
```

```
tf = iscellstr(str)
```

```
tf = logical
   0
```

`str` is a string array, not a cell array, so `iscellstr` returns `0`.

Test a cell array that contains elements of different data types.

```
X = rand(1,3);
C2 = {'red','blue',X}
```

```
C2 = 1×3 cell array
    'red'    'blue'    [1×3 double]
```

```
tf = iscellstr(C2)
```

```
tf = logical
   0
```

`C2` has a cell that does not contain a character vector, so `iscellstr` returns `0`.

- "Cell Arrays of Character Vectors"
- "Create String Arrays"

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. `A` can be any data type.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cellstr` | `char` | `is*` | `isa` | `iscategorical` | `iscell` | `ischar` | `isstring` | `isstrprop` | `isstruct` | `istable` | `string`

Topics

"Cell Arrays of Character Vectors"
"Create String Arrays"

Introduced before R2006a

ischar

Determine if input is character array

Syntax

```
tf = ischar(A)
```

Description

`tf = ischar(A)` returns logical `1` (`true`) if `A` is a character array and logical `0` (`false`) otherwise.

Examples

Determine if Array is Character Array

Create different arrays, and then determine if they are character arrays.

Test a character vector.

```
chr = 'Mary Jones'
```

```
chr =
'Mary Jones'
```

```
tf = ischar(chr)
```

```
tf = logical
   1
```

Test a numeric array.

```
X = rand(1,3)
```

```
X =
```

```
    0.8147    0.9058    0.1270
```

```
tf = ischar(X)
```

```
tf = logical
   0
```

Test a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Smith","Chung","Morales"; ...
       "Sanchez","Peterson","Adams"]
```

```
str = 2×3 string array
    "Smith"      "Chung"       "Morales"
    "Sanchez"    "Peterson"    "Adams"
```

```
tf = ischar(str)
```

```
tf = logical
   0
```

`str` is a string array, not a character array, so `ischar` returns `0`.

- "Create Character Arrays"
- "Cell Arrays of Character Vectors"
- "Create String Arrays"

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. `A` can be any data type.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cellstr` | `char` | `is*` | `isa` | `iscellstr` | `isletter` | `isnumeric` | `isspace` | `isstring` | `isstrprop` | `string`

Topics

"Create Character Arrays"
"Cell Arrays of Character Vectors"
"Create String Arrays"

Introduced before R2006a

iscolumn

Determine whether input is column vector

Syntax

```
iscolumn(V)
```

Description

`iscolumn(V)` returns logical 1 (`true`) if `size(V)` returns `[n 1]` with a nonnegative integer value `n`, and logical 0 (`false`) otherwise.

Examples

Determine Column Vector

Determine if a vector is a column or not.

```
V = rand(1,5);
iscolumn(V)
```

```
ans = logical
   0
```

```
Vt = V';
iscolumn(Vt)
```

```
ans = logical
   1
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`ismatrix` | `isrow` | `isscalar` | `isvector`

Introduced in R2010b

iscom

Determine whether input is COM or ActiveX object

Syntax

```
tf = iscom(h)
```

Description

`tf = iscom(h)` returns logical `1` (`true`) if handle `h` is a COM or Microsoft ActiveX object. Otherwise, returns logical `0` (`false`).

COM functions are available on Microsoft Windows systems only.

Examples

Test an instance of a Microsoft Excel application.

```
h = actxserver('Excel.Application');
iscom(h)
```

MATLAB displays `true`, indicating object `h` is a COM object.

Test an Excel interface:

```
h = actxserver('Excel.Application');
% Create a workbooks object
w = get(h,workbooks');
iscom(w)
```

MATLAB displays `false`, indicating object `w` is not a COM object.

See Also

Topics

"MATLAB COM Integration"

Introduced before R2006a

isdatetime

Determine if input is datetime array

Syntax

```
tf = isdatetime(t)
```

Description

`tf = isdatetime(t)` returns logical `1` (`true`) if `t` is a datetime array. Otherwise, it returns logical `0` (`false`).

Examples

Determine if Array Contains Datetime Values

Define an array.

```
A = [datetime('now');datetime('tomorrow');datetime(2016,1,15)]
```

```
A = 3×1 datetime array
   24-Feb-2017 12:53:16
   25-Feb-2017 00:00:00
   15-Jan-2016 00:00:00
```

Determine if the array is a `datetime` array.

```
tf = isdatetime(A)
```

```
tf = logical
   1
```

Input Arguments

`t` — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. `t` can be any data type.

See Also

See Also

`datetime` | `iscalendarduration` | `isduration`

Introduced in R2014b

isdiag

Determine if matrix is diagonal

Syntax

```
tf = isdiag(A)
```

Description

`tf = isdiag(A)` returns logical `1` (`true`) if `A` is a diagonal matrix; otherwise, it returns logical `0` (`false`).

Examples

Test Diagonal Matrix

Create a 4-by-4 identity matrix.

```
I = eye(4)
```

```
I =

     1     0     0     0
     0     1     0     0
     0     0     1     0
     0     0     0     1
```

Test to see if the matrix is diagonal.

```
isdiag(I)
```

```
ans = logical
   1
```

The result is logical `1` (`true`) because all of the nonzero elements in `I` are on the main diagonal.

Test Banded Matrix

Create a matrix with nonzero elements on the main and first diagonals.

```
A = 3*eye(4) + diag([2 2 2],1)
```

```
A =

     3     2     0     0
     0     3     2     0
     0     0     3     2
     0     0     0     3
```

Test to see if the matrix is diagonal.

```
isdiag(A)
```

```
ans = logical
   0
```

The matrix is not diagonal since there are nonzero elements above the main diagonal.

Create a new matrix, B, from the main diagonal elements of A.

```
B = diag(diag(A));
```

Test to see if B is a diagonal matrix.

```
isdiag(B)
```

```
ans = logical
   1
```

The result is logical 1 (`true`) because there are no nonzero elements above or below the main diagonal of B.

Input Arguments

A — Input array
numeric array

Input array, specified as a numeric array. `isdiag` returns logical `0` (`false`) if `A` has more than two dimensions.

Data Types: `single` | `double`
Complex Number Support: Yes

Definitions

Diagonal Matrix

A matrix is diagonal if all elements above and below the main diagonal are zero. Any number of the elements on the main diagonal can also be zero.

For example, the 4-by-4 identity matrix,

$$I_4 = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

is a diagonal matrix. Diagonal matrices are typically, but not always, square.

Tips

- Use the `diag` function to produce diagonal matrices for which `isdiag` returns logical `1` (`true`).
- The functions `isdiag`, `istriu`, and `istril` are special cases of the function `isbanded`, which can perform all of the same tests with suitably defined upper and lower bandwidths. For example, `isdiag(A) == isbanded(A,0,0)`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`bandwidth` | `diag` | `isbanded` | `istril` | `istriu` | `tril` | `triu`

Introduced in R2014a

isdir

Determine whether input is a folder

Syntax

```
result = isdir(folderName)
```

Description

`result = isdir(folderName)` returns 1 if `folderName` is a folder. Otherwise, it returns 0.

Examples

Determine Whether Input is a Folder

Check whether the input `myfile1.m` is a folder. A result of 0 indicates that `myfile1.m` is not a folder.

```
result = isdir('myfile1.m')
```

```
result = logical
   0
```

Create the folder `myfolder`, then check whether `myfolder` is a folder. A result of 1 indicates that `myfolder` is a folder.

```
mkdir myfolder;
result = isdir('myfolder')
```

```
result = logical
   1
```

List Only Folders in Current Folder

Get the Current Folder listing and filter out only the folders.

Create two folders, `myfolder1` and `myfolder2`.

```
mkdir myfolder1
mkdir myfolder2
```

Get the current folder listing.

```
listing = dir;
```

Filter out only the folders.

```
onlyFolders = listing([listing.isdir]);
onlyFolders.name
```

```
ans =
'.'

ans =
'..'

ans =
'myfolder1'

ans =
'myfolder2'
```

Input Arguments

`folderName` — Name of folder

character vector

Name of the folder, specified as a character vector. `folderName` can be specified as an absolute or relative path.

Output Arguments

`result` — Indication of whether the specified name is a folder

0 | 1

Indication of whether the specified name is a folder, specified as `0` or `1`. If the specified name is a folder, `result` is 1. Otherwise, `result` is 0.

Data Types: `logical`

See Also

See Also

`dir` | `is*`

Introduced before R2006a

isdst

Determine daylight saving time elements

Syntax

```
tf = isdst(t)
```

Description

`tf = isdst(t)` returns an array the same size as `t` containing logical 1 (`true`) where the corresponding element of `t` is a datetime that occurs during Daylight Saving Time, and logical 0 (`false`) otherwise. `isdst` returns `false` for all elements when the `TimeZone` property of `t` is empty (`''`).

Examples

Determine If Datetime Occurs During Daylight Saving Time

```
t = datetime(2014,3,7:11,'TimeZone','America/New_York')
```

```
t = 1×5 datetime array
   07-Mar-2014   08-Mar-2014   09-Mar-2014   10-Mar-2014   11-Mar-2014
```

```
tf = isdst(t)
```

```
tf = 1×5 logical array
   0   0   0   1   1
```

March 10 and March 11, 2014 in the `America/New_York` time zone occur during daylight saving time.

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

datetime Properties | `isweekend` | `tzoffset`

Introduced in R2014b

isduration

Determine if input is duration array

Syntax

```
tf = isduration(t)
```

Description

`tf = isduration(t)` returns logical `1` (`true`) if `t` is a `duration` array. Otherwise, it returns logical `0` (`false`).

Examples

Determine if Array Contains Duration Values

Determine if the output of an arithmetic calculation is a `duration` array.

Subtract a `datetime` array from another.

```
t1 = datetime(2014,03,16:17);
t2 = datetime(2014,03,20);
dt = t2 - t1
```

```
dt = 1×2 duration array
   96:00:00   72:00:00
```

Determine if the output is a `duration` array.

```
tf = isduration(dt)
```

```
tf = logical
   1
```

Input Arguments

`t` — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. `t` can be any data type.

See Also

See Also

`duration` | `iscalendarduration` | `isdatetime`

Introduced in R2014b

isEdge

Class: TriRep

(Not recommended) Test if vertices are joined by edge

Note: `isEdge(TriRep)` is not recommended. Use isConnected(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
TF = isEdge(TR, V1, V2)
TF = isEdge(TR, EDGE)
```

Description

`TF = isEdge(TR, V1, V2)` returns an array of 1/0 (true/false) flags, where each entry `TF(i)` is true if `V1(i)`, `V2(i)` is an edge in the triangulation. `V1`, `V2` are column vectors representing the indices of the vertices in the mesh, that is, indices into the vertex coordinate arrays.

`TF = isEdge(TR, EDGE)` specifies the edge start and end indices in matrix format.

Input Arguments

`TR`	Triangulation representation.
`V1, V2`	Column vectors of mesh vertices.
`EDGE`	Matrix of size `n`-by-2 where `n` is the number of query edges.

Output Arguments

`TF`	Array of 1/0 (true/false) flags, where each entry `TF(i)` is true if `V1(i)`, `V2(i)` is an edge in the triangulation.

Examples

Example 1

Load a 2-D triangulation and use `TriRep` to query the presence of an edge between pairs of points.

```
load trimesh2d
trep = TriRep(tri, x,y);
```

Test if vertices 3 and 117 are connected by an edge

```
isEdge(trep, 3, 117)
```

Test if vertices 3 and 164 are connected by an edge

```
isEdge(trep, 3, 164)
```

Example 2

Direct query of a 3-D Delaunay triangulation created using `DelaunayTri`.

```
X = rand(10,3)
dt = DelaunayTri(X)
```

Test if vertices 2 and 7 are connected by an edge

```
isEdge(dt, 2, 7);
```

See Also

triangulation | delaunayTriangulation

isempty

Determine whether array is empty

Syntax

```
TF = isempty(A)
```

Description

`TF = isempty(A)` returns logical 1 (`true`) if `A` is an empty array and logical 0 (`false`) otherwise. An empty array has at least one dimension of size zero, for example, 0-by-0 or 0-by-5.

Examples

Determine Empty Array

Determine if a multidimensional array is empty or not.

```
A = rand(2,2,2);
isempty(A)
```

```
ans = logical
   0
```

```
A(:,:,:) = [];
isempty(A)
```

```
ans = logical
   1
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`is*`

Introduced before R2006a

isempty (tscollection)

Determine whether `tscollection` object is empty

Syntax

```
isempty(tsc)
```

Description

`isempty(tsc)` returns a logical value for `tscollection` object `tsc`, as follows:

- `1` — When `tsc` contains neither `timeseries` members nor a time vector
- `0` — When `tsc` contains either `timeseries` members or a time vector

See Also

timeseries | `length (tscollection)` | `size (tscollection)` | `tscollection`

Introduced before R2006a

isequal

Determine array equality

Syntax

```
tf = isequal(A,B)
tf = isequal(A1,A2,...,An)
```

Description

`tf = isequal(A,B)` returns logical `1` (`true`) if `A` and `B` are the same size and their contents are of equal value; otherwise, it returns logical `0` (`false`). The test compares both real and imaginary parts of numeric arrays. `isequal` ignores the data type of the values in determining whether they are equal. For cell arrays, categorical arrays, tables, or structures, the function returns logical `1` (`true`) only when all elements and properties are equal. Undefined categorical elements, `<missing>`, `NaN` (Not a Number), or `NaT` (Not a Time) values are considered to be unequal to other elements, as well as themselves.

`tf = isequal(A1,A2,...,An)` returns logical `1` (`true`) if all the inputs are numerically equal.

Examples

Compare Two Numeric Matrices

Create two numeric matrices and compare them for equality.

```
A = zeros(3,3)+1e-20;
B = zeros(3,3);
tf = isequal(A,B)
```

```
tf = logical
   0
```

The function returns logical 0 (false) because the matrices differ by a very small amount and are not *exactly* equal.

Compare Two Structures

Create two structures and specify the fields in a different order.

```
A = struct('field1',0.005,'field2',2500);
B = struct('field2',2500,'field1',0.005);
```

Compare the structures for equality.

```
tf = isequal(A,B)
```

```
tf = logical
   1
```

Even though the ordering of the fields in each structure is different, isequal treats them as the same because the values are equal.

Comparing Numeric Values with Special Nonnumeric Values

Compare the logical value true to the double integer 1.

```
isequal(true,1)
```

```
ans = logical
   1
```

Notice that isequal does not consider data type when it tests for equality.

Similarly, compare 'A' to the ASCII-equivalent integer, 65.

```
isequal('A',65)
```

```
ans = logical
   1
```

The result is logical 1 (true) since double('A') equals 65.

Compare Vectors Containing NaN Values

Create three vectors containing NaN values.

```
A1 = [1 NaN NaN];
A2 = [1 NaN NaN];
A3 = [1 NaN NaN];
```

Compare the vectors for equality.

```
tf = isequal(A1,A2,A3)
```

```
tf = logical
   0
```

The result is logical `0` (`false`) because `isequal` does not treat NaN values as equal to each other.

Compare Two Datetime Values

Determine if midnight on January 13, 2013 in Anchorage, Alaska is equal to 11 AM on the same date in Cairo.

```
t1 = datetime(2013,1,13,0,0,0,'TimeZone','America/Anchorage');
t2 = datetime(2013,1,13,11,0,0,'TimeZone','Africa/Cairo');
tf = isequal(t1,t2)
```

```
tf = logical
   1
```

Add 8 months to the date, and compare the datetime values for equality.

```
t1 = datetime(2013,9,13,0,0,0,'TimeZone','America/Anchorage');
t2 = datetime(2013,9,13,11,0,0,'TimeZone','Africa/Cairo');
tf = isequal(t1,t2)
```

```
tf = logical
   0
```

The datetime values are no longer equal since Cairo does not observe daylight saving time.

Input Arguments

A,B — Inputs to be compared

numeric arrays | categorical arrays | cell arrays | string arrays | tables | structures | ...

Inputs to be compared, specified as numeric arrays, categorical arrays, cell arrays, string arrays, tables, structures, logical arrays, character arrays, datetime arrays, duration arrays, calendarDuration arrays, or objects. The numeric types of A and B do not have to match.

- You can compare any combination of datetime arrays and cell arrays of character vectors for equality.

If inputs A and B are *both*

- Structures -- Fields need not be in the same order as long as the contents are equal.
- Ordinal categorical arrays -- Must have the same sets of categories, including their order.
- Categorical arrays that are not ordinal -- Can have different sets of categories, and `isequal` compares the category names of each pair of elements.
- Datetime arrays -- `isequal` ignores time zone and display format when it compares points in time.
- Objects with dynamic properties – `isequal` returns logical 0 (`false`). This applies even if the properties have the same name and value.

A1,A2,...,An — Series of inputs to be compared

numeric arrays | categorical arrays | cell arrays | string arrays | tables | structures | ...

Series of inputs to be compared, specified as numeric arrays, categorical arrays, cell arrays, string arrays, tables, structures, logical arrays, character arrays, datetime arrays, duration arrays, calendarDuration arrays, or objects. The numeric types of the inputs do not have to match.

- You can compare any combination of datetime arrays and cell arrays of character vectors for equality.

If the inputs are *all*

- Structures -- Fields need not be in the same order as long as the contents are equal.

- Ordinal categorical arrays -- Must have the same sets of categories, including their order.
- Categorical arrays that are not ordinal -- Can have different sets of categories, and `isequal` compares the category names of each pair of elements.
- Datetime arrays -- `isequal` ignores time zone and display format when it compares points in time.
- Objects with dynamic properties – `isequal` returns logical `0` (`false`). This applies even if the properties have the same name and value.

Tips

- When comparing handle objects, use `==` to test whether objects have the same handle. Use `isequal` to determine if objects with different handles have equal property values.
- Use `isequaln` if you want to test for equality and treat `NaN`, `NaT`, or `<missing>` values as equal.
- The equality of two function handles depends on how they are constructed. For more information, see “Compare Function Handles”.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`eq` | `is*` | `isa` | `isequaln` | `strcmp`

Introduced before R2006a

isenum

Determine if variable is enumeration

Syntax

```
tf = isenum(e)
```

Description

`tf = isenum(e)` returns logical 1 (`true`) if `e` is an enumeration. Otherwise, it returns logical 0 (`false`). Empty enumeration objects return `true`.

If `e` is a heterogeneous array, `isenum` always returns `false`.

Examples

Test for Enumeration

Determine if a variable is an enumeration.

The `PPM` class defines enumerations for three levels:

```
classdef PPM < int32
   enumeration
      High (1000)
      Medium (100)
      Low (10)
   end
end
```

Create a variable representing a level. Use `isenum` to determine if the variable is an enumeration:

```
currentLevel = PPM.High;
isenum(currentLevel)
```

```
ans =
```

1

Input Arguments

e — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as any MATLAB variable.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`islogical` | `isnumeric` | `isobject` | `isstruct`

Topics

"Define Enumeration Classes"

Introduced in R2015a

isequaln

Determine array equality, treating NaN values as equal

Syntax

```
tf = isequaln(A,B)
tf = isequaln(A1,A2,...,An)
```

Description

`tf = isequaln(A,B)` returns logical `1` (`true`) if `A` and `B` are the same size and their contents are of equal value; otherwise, it returns logical `0` (`false`). The test compares both real and imaginary parts of numeric arrays. `isequaln` ignores the data type of the values in determining whether they are equal. For cell arrays, categorical arrays, tables, or structures, the function returns logical `1` (`true`) only when all elements and properties are equal. Undefined categorical elements, `<missing>`, `NaN` (Not a Number), or `NaT` (Not a Time) values are considered to be equal to other such values.

`tf = isequaln(A1,A2,...,An)` returns logical `1` (`true`) if all the inputs are numerically equal.

Examples

Compare Two Numeric Matrices

Create two numeric matrices and compare them for equality.

```
A = zeros(3,3)+1e-20;
B = zeros(3,3);
tf = isequaln(A,B)
```

```
tf = logical
   0
```

The function returns logical `0` (`false`) because the matrices differ by a very small amount and are not *exactly* equal.

Compare Two Structures

Create two structures and specify the fields in a different order.

```
A = struct('field1',0.005,'field2',2500);
B = struct('field2',2500,'field1',0.005);
```

Compare the structures for equality.

```
tf = isequaln(A,B)
```

```
tf = logical
   1
```

Even though the ordering of the fields in each structure is different, `isequaln` treats them as the same because the values are equal.

Comparing Numeric Values with Special Nonnumeric Values

Compare the logical value `true` to the double integer `1`.

```
isequaln(true,1)
```

```
ans = logical
   1
```

Notice that `isequaln` does not consider data type when it tests for equality.

Similarly, compare `'A'` to the ASCII-equivalent integer, `65`.

```
isequaln('A',65)
```

```
ans = logical
   1
```

The result is logical `1` (`true`) since `double('A')` equals `65`.

Compare Vectors Containing NaN Values

Create three vectors containing NaN values.

```
A1 = [1 NaN NaN];
A2 = [1 NaN NaN];
A3 = [1 NaN NaN];
```

Compare the vectors for equality.

```
tf = isequaln(A1,A2,A3)
```

```
tf = logical
   1
```

The result is logical `1` (`true`) because `isequaln` treats the NaN values as equal to each other.

Input Arguments

`A,B` — Inputs to be compared

numeric arrays | categorical arrays | cell arrays | string arrays | tables | structures | ...

Inputs to be compared, specified as numeric arrays, categorical arrays, cell arrays, string arrays, tables, structures, logical arrays, character arrays, datetime arrays, duration arrays, calendarDuration arrays, or objects. The numeric types of `A` and `B` do not have to match.

- You can compare any combination of datetime arrays and cell arrays of character vectors for equality.

If inputs `A` and `B` are *both*

- Structures -- Fields need not be in the same order as long as the contents are equal.
- Ordinal categorical arrays -- Must have the same sets of categories, including their order.
- Categorical arrays that are not ordinal -- Can have different sets of categories, and `isequaln` compares the category names of each pair of elements.

- Datetime arrays -- `isequaln` ignores time zone and display format when it compares points in time.
- Objects with dynamic properties – `isequaln` returns logical `0` (`false`). This applies even if the properties have the same name and value.

`A1,A2,...,An` — Series of inputs to be compared

numeric arrays | categorical arrays | cell arrays | string arrays | tables | structures | ...

Series of inputs to be compared, specified as numeric arrays, categorical arrays, cell arrays, string arrays, tables, structures, logical arrays, character arrays, datetime arrays, duration arrays, calendarDuration arrays, or objects. The numeric types of the inputs do not have to match.

- You can compare any combination of datetime arrays and cell arrays of character vectors for equality.

If the inputs are *all*

- Structures -- Fields need not be in the same order as long as the contents are equal.
- Ordinal categorical arrays -- Must have the same sets of categories, including their order.
- Categorical arrays that are not ordinal -- Can have different sets of categories, and `isequaln` compares the category names of each pair of elements.
- Datetime arrays -- `isequaln` ignores time zone and display format when it compares points in time.
- Objects with dynamic properties – `isequaln` returns logical `0` (`false`). This applies even if the properties have the same name and value.

Tips

- When comparing handle objects, use `==` to test whether objects have the same handle. Use `isequaln` to treat NaN values as equal and determine if objects with different handles have equal property values.
- Use `isequal` if you want to test for equality and treat `NaN`, `NaT`, or `<missing>` values as unequal.
- The equality of two function handles depends on how they are constructed. For more information, see “Compare Function Handles”.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`eq` | `is*` | `isa` | `isequal` | `strcmp`

Introduced in R2012a

isequalwithequalnans

Test arrays for equality, treating NaNs as equal

Note: `isequalwithequalnans` is not recommended. Use `isequaln` instead.

Syntax

```
tf = isequalwithequalnans(A, B, ...)
```

Description

`tf = isequalwithequalnans(A, B, ...)` returns logical `1` (`true`) if the input arrays are the same type and size and hold the same contents, and logical `0` (`false`) otherwise. `NaN` (Not a Number) values are considered to be equal to each other. Numeric data types and structure field order do not have to match.

Examples

Arrays containing `NaN`s are handled differently by `isequal` and `isequalwithequalnans`. `isequal` does not consider `NaN`s to be equal, while `isequalwithequalnans` does.

```
A = [32 8 -29 NaN 0 5.7];
B = A;
isequal(A, B)
ans =
     0

isequalwithequalnans(A, B)
ans =
     1
```

The position of `NaN` elements in the array does matter. If they are not in the same position in the arrays being compared, then `isequalwithequalnans` returns zero.

```
A = [2 4 6 NaN 8];   B = [2 4 NaN 6 8];
isequalwithequalnans(A, B)
ans =
     0
```

Tips

`isequalwithequalnans` is the same as `isequal`, except `isequalwithequalnans` considers `NaN` (Not a Number) values to be equal, and `isequal` does not.

`isequalwithequalnans` recursively compares the contents of cell arrays and structures. If all the elements of a cell array or structure are numerically equal, `isequalwithequalnans` returns logical `1`.

See Also

`isequal` | `strcmp` | `isa` | `is*` | `isequaln`

Introduced before R2006a

isevent

Determine whether input is COM object event

Syntax

```
tf = isevent(h,'eventname')
```

Description

`tf = isevent(h,'eventname')` returns logical `1` (`true`) if `eventname` is an event recognized by COM object `h`. Otherwise, returns logical `0` (`false`). The `eventname` argument is not case-sensitive.

COM functions are available on Microsoft Windows systems only.

Examples

This example tests events in a MATLAB sample control object.

1. Create an instance of the `mwsamp` control and test `DblClick`.

   ```
   f = figure('position',[100 200 200 200]);
   h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],f);
   isevent(h,'DblClick')
   ```

   MATLAB displays `true`, indicating `DblClick` is an event.

2. Try the same test on`Redraw`.

   ```
   isevent(h,'Redraw')
   ```

   MATLAB displays `false`, indicating `Redraw` is not an event; it is a method.

Test events in a Microsoft Excel workbook object.

1. Create a `Workbook` object `wb`

   ```
   myApp = actxserver('Excel.Application');
   ```

```
wbs = myApp.Workbooks;
wb = Add(wbs);
```

2 Test `Activate`.

```
isevent(wb,'Activate')
```

MATLAB displays `true`, indicating `Activate` is an event.

3 Test `Save`

```
isevent(wb,'Save')
```

MATLAB displays `false`, indicating `Save` is not an event; it is a method.

See Also

`events (COM)` | `eventlisteners` | `registerevent`

Topics

"Exploring Events"

Introduced before R2006a

isfield

Determine whether input is structure array field

Syntax

```
tf = isfield(S, 'fieldname')
tf = isfield(S, C)
```

Description

`tf = isfield(S, 'fieldname')` examines structure `S` to see if it includes the field specified by the quoted character vector `'fieldname'`. Output `tf` is set to logical `1` (`true`) if `S` contains the field, or logical `0` (`false`) if not. If `S` is not a structure array, `isfield` returns `false`.

`tf = isfield(S, C)` examines structure `S` for multiple fieldnames as specified in cell array of character vectors `C`, and returns an array of logical values to indicate which of these fields are part of the structure. Elements of output array `tf` are set to a logical 1 (`true`) if the corresponding element of `C` holds a fieldname that belongs to structure `S`. Otherwise, logical 0 (`false`) is returned in that element. In other words, if structure `S` contains the field specified in `C{m,n}`, `isfield` returns a logical 1 (`true`) in `tf(m,n)`.

Note `isfield` returns `false` if the `field` or `fieldnames` input is empty.

Examples

Example 1 — Single Fieldname Syntax

Given the following MATLAB structure,

```
patient.name = 'John Doe';
patient.billing = 127.00;
patient.test = [79 75 73; 180 178 177.5; 220 210 205];
```

`isfield` identifies `billing` as a field of that structure.

```
isfield(patient,'billing')
ans =
     1
```

Example 2 — Multiple Fieldname Syntax

Check structure `S` for any of four possible fieldnames. Only the first is found, so the first element of the return value is set to `true`:

```
S = struct('one', 1, 'two', 2);

fields = isfield(S, {'two', 'pi', 'One', 3.14})
fields =
     1     0     0     0
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Cell arrays are not supported for the second argument.

See Also

`fieldnames` | `setfield` | `getfield` | `orderfields` | `rmfield` | `struct` | `isstruct` | `iscell` | `isa` | `is*`

Topics

dynamic field names

Introduced before R2006a

isfinite

Array elements that are finite

Syntax

```
TF = isfinite(A)
```

Description

`TF = isfinite(A)` returns an array the same size as `A` containing logical 1 (`true`) where the elements of the array `A` are finite and logical 0 (`false`) where they are infinite or `NaN`. For a complex number `z`, `isfinite(z)` returns `1` if both the real and imaginary parts of `z` are finite, and `0` if either the real or the imaginary part is infinite or `NaN`.

For any real `A`, exactly one of the three quantities `isfinite(A)`, `isinf(A)`, and `isnan(A)` is equal to one.

Examples

Finite Elements of Vector

Create a row vector, `A`, and determine the finite elements.

```
A = 1./[-2 -1 0 1 2]
```

```
A =

   -0.5000   -1.0000       Inf    1.0000    0.5000
```

```
TF = isfinite(A)
```

```
TF = 1×5 logical array
   1   1   0   1   1
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`isinf` | `isnan` | `is*`

Introduced before R2006a

isfloat

Determine if input is floating-point array

Syntax

```
tf = isfloat(A)
```

Description

`tf = isfloat(A)` returns `true` if `A` is a floating-point array and `false` otherwise. The floating-point types are `single` and `double`, and subclasses of `single` and `double`.

Examples

These examples show the values `isfloat` returns when passed specific types:

```
% pi returns a floating-point value
isfloat(pi)
ans =
     1
% Complex numbers are floating-point values
isfloat(3+7i)
ans =
     1
% Single-precision numbers are floating-point values
isfloat(realmax('single'))
ans =
     1
% isfloat returns a logical value
isfloat(isfloat(pi))
ans =
     0
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`double` | `single` | `isa` | `isinteger` | `isnumeric`

Introduced before R2006a

isgraphics

True for valid graphics object handles

Syntax

```
tf = isgraphics(H)
tf = isgraphics(H,type)
```

Description

`tf = isgraphics(H)` returns `true` for elements of `H` that are valid graphics objects and `false` where elements are not valid graphics objects.

`tf = isgraphics(H,type)` returns `true` for elements of `H` that are valid graphics objects of the type specified by the `type` argument. An object type is the value contained in the object's `Type` property.

Examples

Test for Valid Handles

Create a plot and return the handle array. Test array for valid handles.

```
H = plot(rand(5));
```

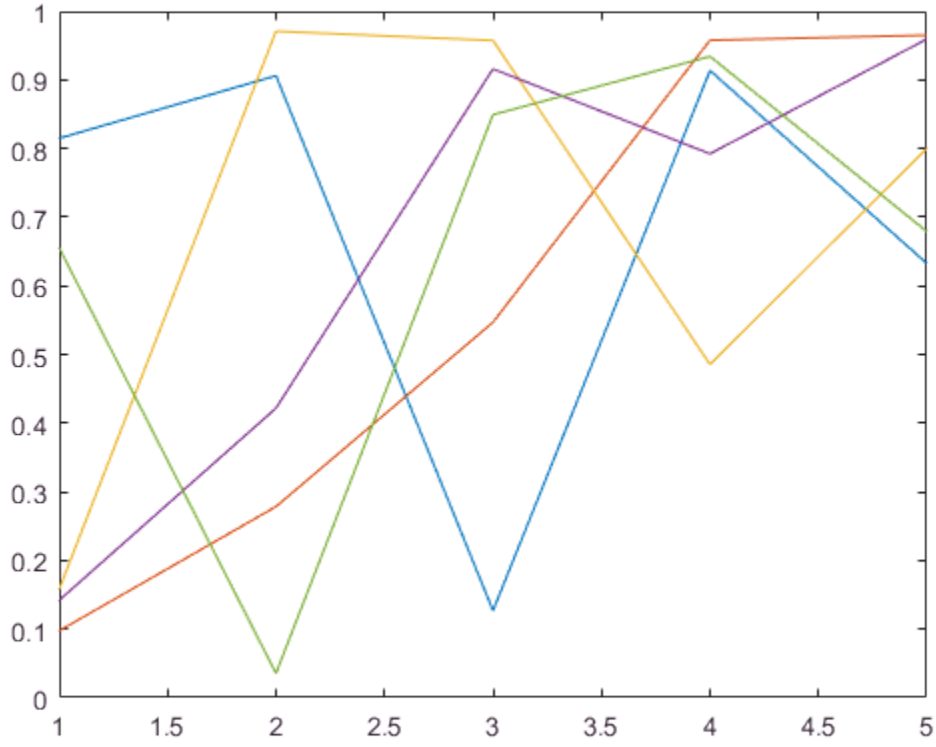


```
isgraphics(H)
```

```
ans = 5×1 logical array
   1
   1
   1
   1
   1
```

Test for Handle Types

Create a plot and return the handle array. Concatenate with other graphics objects and test for handles that are of type `Line`.

```
H = plot(rand(5));
```

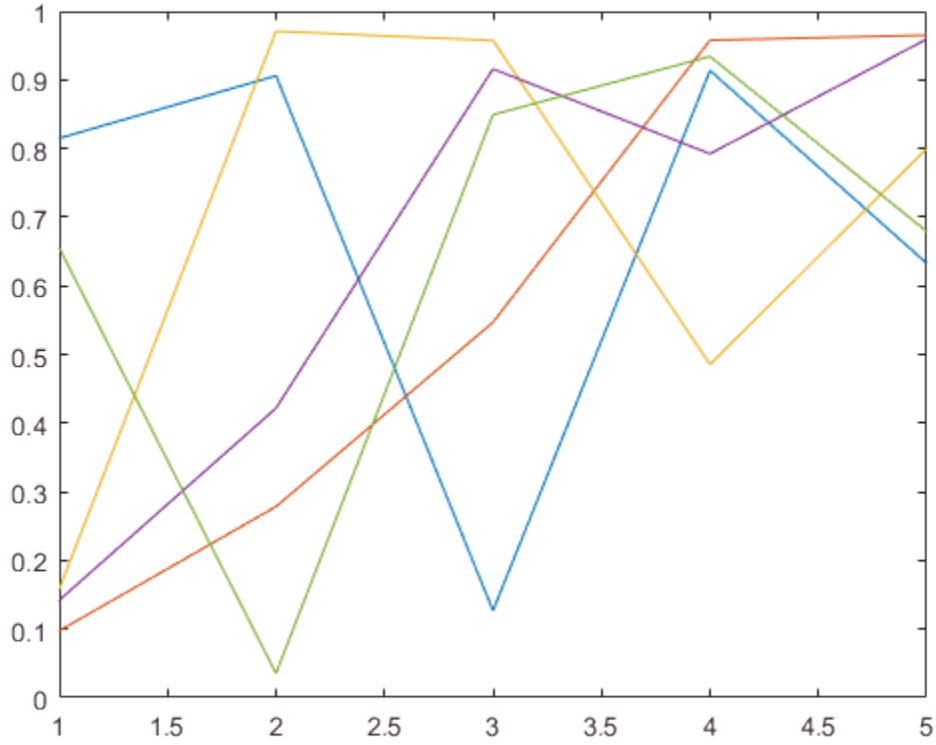


```
a = [H;gca;gcf];
isgraphics(a,'line')
```

```
ans = 7×1 logical array
   1
   1
   1
   1
   1
   0
   0
```

Input Arguments

`H` — Input variable or expression

graphics object array

Input variable or expression that evaluates to graphics object handles.

`type` — Object type

character vector

Object type, specified as a character vector. An object's type is contained in its `Type` property.

Output Arguments

`tf` — result

logical array | empty `GraphicsPlaceholder` array

Result, returned as a logical array or an empty `GraphicsPlaceholder` array. If the result is a logical array, `1` indicates elements of the input array that are valid, and `0` indicates elements that are invalid. The result is an empty `GraphicsPlaceholder` array when the input array is empty.

See Also

See Also

Functions

`isa` | `ishghandle`

Topics

"Graphics Object Handles"

Introduced in R2014b

ishandle

Test for valid graphics or Java object handle

Syntax

```
ishandle(H)
```

Description

`ishandle(H)` returns an array whose elements are `1` where the elements of `H` are graphics or Java object handles, and `0` where they are not.

Note: Use the most specific function for your application instead of `ishandle`, as described in the following sections.

MATLAB Handle Objects

Use the `isa` function to determine the class of MATLAB objects.

Use the `handle` class `isvalid` method to determine the validity of handle objects. See "Test Handle Validity" for information on testing for MATLAB handle objects.

Graphics Object Handles

Use `isgraphics` for graphics objects.

Java Object Handles

Use `isjava` for Java objects.

See Also

`isa` | `isjava` | `isgraphics`

Introduced before R2006a

ishermitian

Determine if matrix is Hermitian or skew-Hermitian

Syntax

```
tf = ishermitian(A)
tf = ishermitian(A,skewOption)
```

Description

`tf = ishermitian(A)` returns logical `1` (`true`) if square matrix `A` is Hermitian; otherwise, it returns logical `0` (`false`).

`tf = ishermitian(A,skewOption)` specifies the type of the test. Specify `skewOption` as `'skew'` to determine if `A` is skew-Hermitian.

Examples

Test if Symmetric Matrix Is Hermitian

Create a 3-by-3 matrix.

```
A = [1 0 1i; 0 1 0; 1i 0 1]
```

```
A =
   1.0000 + 0.0000i   0.0000 + 0.0000i   0.0000 + 1.0000i
   0.0000 + 0.0000i   1.0000 + 0.0000i   0.0000 + 0.0000i
   0.0000 + 1.0000i   0.0000 + 0.0000i   1.0000 + 0.0000i
```

The matrix is symmetric with respect to its real-valued diagonal.

Test whether the matrix is Hermitian.

```
tf = ishermitian(A)
```

```
tf = logical
   0
```

The result is logical `0` (`false`) because `A` is not Hermitian. In this case, `A` is equal to its transpose, `A.'`, but not its complex conjugate transpose, `A'`.

Change the element in `A(3,1)` to be `-1i`.

```
A(3,1) = -1i;
```

Determine if the modified matrix is Hermitian.

```
tf = ishermitian(A)
```

```
tf = logical
   1
```

The matrix, `A`, is now Hermitian because it is equal to its complex conjugate transpose, `A'`.

Test if Matrix Is Skew-Hermitian

Create a 3-by-3 matrix.

```
A = [-1i -1 1-i;1 -1i -1;-1-i 1 -1i]
```

```
A =
   0.0000 - 1.0000i  -1.0000 + 0.0000i   1.0000 - 1.0000i
   1.0000 + 0.0000i   0.0000 - 1.0000i  -1.0000 + 0.0000i
  -1.0000 - 1.0000i   1.0000 + 0.0000i   0.0000 - 1.0000i
```

The matrix has pure imaginary numbers on the main diagonal.

Specify `skewOption` as `'skew'` to determine whether the matrix is skew-Hermitian.

```
tf = ishermitian(A,'skew')
```

```
tf = logical
   1
```

The matrix, `A`, is skew-Hermitian since it is equal to the negation of its complex conjugate transpose, `-A'`.

Input Arguments

A — Input matrix
numeric matrix

Input matrix, specified as a numeric matrix. If A is not square, then `ishermitian` returns logical 0 (`false`).

Data Types: `single` | `double` | `logical`
Complex Number Support: Yes

`skewOption` — Test type
`'nonskew'` (default) | `'skew'`

Test type, specified as `'nonskew'` or `'skew'`. Specify `'skew'` to test whether A is skew-Hermitian.

Definitions

Hermitian Matrix

- A square matrix, A, is Hermitian if it is equal to its complex conjugate transpose, `A = A'`.

  In terms of the matrix elements, this means that

  $$a_{i,j} = \bar{a}_{j,i} \ .$$

- The entries on the diagonal of a Hermitian matrix are always real. Since real matrices are unaffected by complex conjugation, a real matrix that is symmetric is also Hermitian. For example, the matrix

  $$A = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 2 & 0 \\ 1 & 0 & 1 \end{bmatrix}$$

  is both symmetric and Hermitian.
- The eigenvalues of a Hermitian matrix are real.

Skew-Hermitian Matrix

- A square matrix, `A`, is skew-Hermitian if it is equal to the negation of its complex conjugate transpose, `A = -A'`.

  In terms of the matrix elements, this means that

  $$a_{i,j} = -\bar{a}_{j,i} \ .$$

- The entries on the diagonal of a skew-Hermitian matrix are always pure imaginary or zero. Since real matrices are unaffected by complex conjugation, a real matrix that is skew-symmetric is also skew-Hermitian. For example, the matrix

  $$A = \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}$$

  is both skew-Hermitian and skew-symmetric.
- The eigenvalues of a skew-Hermitian matrix are purely imaginary or zero.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`ctranspose` | `eig` | `isreal` | `issymmetric` | `transpose`

Introduced in R2014a

ishghandle

True for graphics object handles

Syntax

```
ishghandle(h)
```

Description

`ishghandle(h)` returns an array that contains 1's where the elements of `h` are handles to existing graphic objects and 0's where they are not. Differs from `ishandle` in that Simulink objects handles return false.

Examples

Test for Valid Graphics Object Handle

Create a plot. Test if the output `p` is a valid graphics object handle.

```
x = 1:10;
y = 1:10;
p = plot(x,y);
```

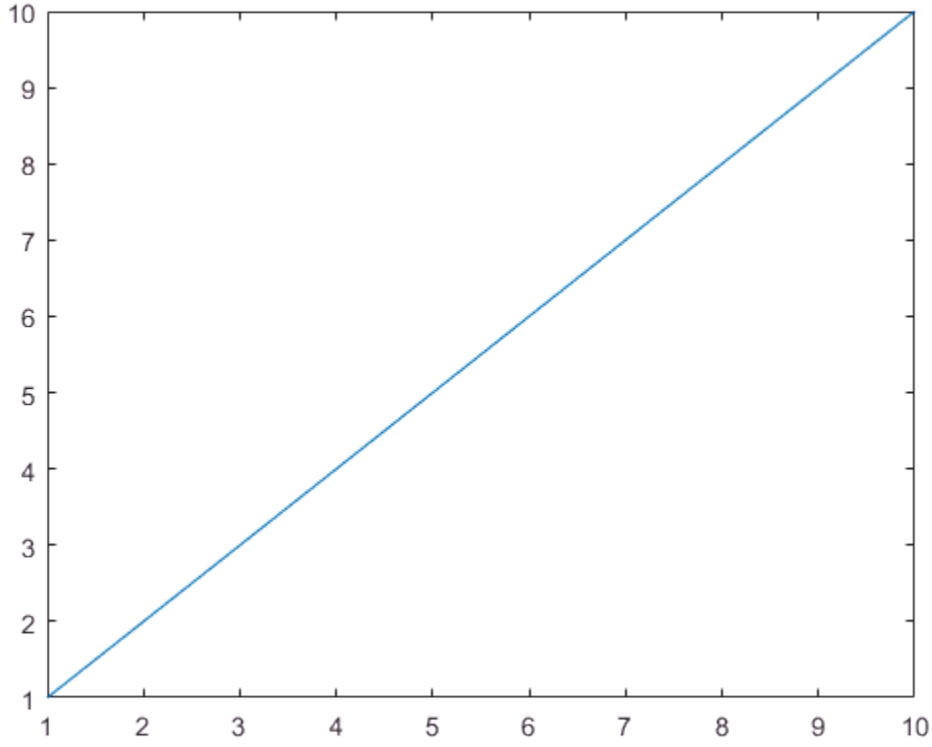


```
ishghandle(p)
```

```
ans = logical
   1
```

See Also

isa | isgraphics | gca

Topics

"Graphics Object Handles"

ishold

Current hold state

Syntax

```
tf = ishold
```

Description

`tf = ishold` returns `1` if `hold` is `on`, and `0` if it is `off`. When `hold` is `on`, the current plot and most axis properties are held so that subsequent graphing commands add to the existing graph.

A state of `hold on` implies that both figure and axes `NextPlot` properties are set to `add`.

See Also

`hold` | `newplot`

Topics

"Control Graph Display"

Introduced before R2006a

isinf

Array elements that are infinite

Syntax

```
TF = isinf(A)
```

Description

`TF = isinf(A)` returns an array the same size as `A` containing logical 1 (`true`) where the elements of `A` are `+Inf` or `-Inf` and logical 0 (`false`) where they are not. For a complex number `z`, `isinf(z)` returns `1` if either the real or imaginary part of `z` is infinite, and `0` if both the real and imaginary parts are finite or `NaN`.

For any real `A`, exactly one of the three quantities `isfinite(A)`, `isinf(A)`, and `isnan(A)` is equal to one.

Examples

Infinite Elements of Vector

Determine the infinite elements of the row vector, `A`.

```
A = 1./[-2 -1 0 1 2]
```

```
A =

   -0.5000   -1.0000       Inf    1.0000    0.5000
```

```
TF = isinf(A)
```

```
TF = 1×5 logical array
   0   0   1   0   0
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`isnan` | `isfinite` | `is*`

Introduced before R2006a

isinteger

Determine if input is integer array

Syntax

```
tf = isinteger(A)
```

Description

`tf = isinteger(A)` returns `true` if the array `A` is an integer type and `false` otherwise.

An integer array is any of the following integer types and any subclasses of those types:

MATLAB Integer Types

`int8`	8-bit signed integer array
`uint8`	8-bit unsigned integer array
`int16`	16-bit signed integer array
`uint16`	16-bit unsigned integer array
`int32`	32-bit signed integer array
`uint32`	32-bit unsigned integer array
`int64`	64-bit signed integer array
`uint64`	64-bit unsigned integer array

Examples

These examples show the values `isinteger` returns when passed specific types:

```
% uint8 is one of the integer types
isinteger(uint8(1:255))
ans =
     1
```

```
% pi returns a double-precision value
isinteger(pi)
ans =
     0
% Constants are double-precision by default
isinteger(3)
ans =
     0
% isinteger returns a logical value
isinteger(isinteger(uint8(3)))
ans =
     0
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

isa | isnumeric | isfloat

Introduced before R2006a

isinterface

Determine whether input is COM interface

Syntax

```
tf = isinterface(h)
```

Description

`tf = isinterface(h)` returns logical `1` (`true`) if handle `h` is a COM interface. Otherwise, returns logical `0` (`false`).

COM functions are available on Microsoft Windows systems only.

Examples

Test an instance of a Microsoft Excel application.

```
h = actxserver('Excel.Application');
isinterface(h)
```

MATLAB displays `false`, indicating object `h` is not an interface.

Test a `workbooks` object

```
w = get(h,'workbooks');
isinterface(w)
```

MATLAB displays `true`, indicating object `w` is an interface.

See Also

`iscom` | `interfaces`

Topics

"Exploring Interfaces"

isjava

Determine if input is Java object

Syntax

```
tf = isjava(A)
```

Description

`tf = isjava(A)` returns logical `1` (`true`) if object `A` is a Java object. Otherwise, it returns logical `0` (`false`).

Examples

Test If java.util.Date Is Java Object

Create an instance of the Java® Date class.

```
myDate = java.util.Date;
isjava(myDate)
```

```
ans = logical
   1
```

`myDate` is a Java object.

However, `myDate` is not a MATLAB® object.

```
isobject(myDate)
```

```
ans = logical
   0
```

Input Arguments

A — Input variable
any data type

Input variable, specified as any data type.

See Also

See Also

`is*` | `isa` | `isobject` | `javaArray` | `javaMethod` | `javaObject`

Introduced before R2006a

isKey

Class: containers.Map
Package: containers

Determine if `containers.Map` object contains key

Syntax

```
tf = isKey(mapObj,keySet)
```

Description

`tf = isKey(mapObj,keySet)` looks for the specified keys in `mapObj`, and returns logical `true` (`1`) for the keys that it finds, and logical `false` (`0`) for those it does not. `keySet` is a scalar key or a cell array of keys.

Input Arguments

`mapObj`

Object of class containers.Map.

`keySet`

Scalar value, character vector, or cell array that specifies keys to find in `mapObj`.

Output Arguments

`tf`

Array of logical values. If `keySet` is a scalar or a character vector, `tf` is a scalar. Otherwise, `tf` has the same size and dimensions as `keySet`.

Examples

Find Keys in a Map

Construct a map that contains rainfall data for several months:

```
months =   {'Jan', 'Feb', 'Mar', 'Apr'};
rainfall = [327.2, 368.2, 197.6, 178.4];
mapObj = containers.Map(months,rainfall);
```

Determine if keys `Apr`, `May`, and `Jun` are in the map:

```
keySet = {'Apr','May','Jun'};
tf = isKey(mapObj,keySet)
```

This code returns 1-by-3 vector `tf`:

```
tf =

     1     0     0
```

Find a Single Key

Determine if `mapObj` from the previous example contains key `Feb`:

```
keySet = 'Feb';
tf = isKey(mapObj,keySet)
```

This code returns scalar `tf`:

```
tf =

     1
```

See Also

keys | values | containers.Map | remove

iskeyword

Determine whether input is MATLAB keyword

Syntax

```
tf = iskeyword('str')
iskeyword str
iskeyword
```

Description

`tf = iskeyword('str')` returns logical `1` (`true`) if the string `str` is a keyword in the MATLAB language and logical `0` (`false`) otherwise. MATLAB keywords cannot be used as variable names.

`iskeyword str` uses the MATLAB command format.

`iskeyword` returns a list of all MATLAB keywords.

Examples

To test if the word `while` is a MATLAB keyword,

```
iskeyword while
ans =
    1
```

To obtain a list of all MATLAB keywords,

```
iskeyword
    'break'
    'case'
    'catch'
    'classdef'
    'continue'
    'else'
    'elseif'
```

```
'end'
'for'
'function'
'global'
'if'
'otherwise'
'parfor'
'persistent'
'return'
'spmd'
'switch'
'try'
'while'
```

See Also

`isvarname` | `matlab.lang.makeValidName` | `matlab.lang.makeUniqueStrings` | `is*`

Introduced before R2006a

isletter

Determine which character array elements are letters

Syntax

```
TF = isletter(A)
```

Description

`TF = isletter(A)` returns a logical array `TF`. If `A` is a character array, the elements of `TF` are logical `1` (`true`) where the corresponding elements of `A` are letters, and logical `0` (`false`) elsewhere.

If `A` is not a character array, then `isletter` returns logical `0` (`false`).

Examples

Determine Which Character Array Elements Are Letters

Create different arrays, and then determine which array elements are letters.

```
chr = '123 Main St.'
```

```
chr =
'123 Main St.'
```

```
TF = isletter(chr)
```

```
TF = 1×12 logical array
   0   0   0   0   1   1   1   1   0   1   1   0
```

Starting in R2016b, you can convert character arrays to strings using the `string` function. Convert `chr` to a string, and test it. The input argument is not a character array, so `isletter` returns `0`.

```
str = string(chr)
```

```
str =
"123 Main St."
```

```
TF = isletter(str)
```

```
TF = logical
   0
```

- "Create Character Arrays"
- "Search and Replace Text"

Input Arguments

A — Input array
scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. A can be any data type.

Tips

To find letters within elements of a string array, use the `isstrprop` function.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input values from the `char` class must be in the range 0-127.

See Also

See Also

`char` | `is*` | `isa` | `iscellstr` | `ischar` | `isnumeric` | `isspace` | `isspace` | `isstring` | `isstrprop` | `string`

Topics

"Create Character Arrays"
"Search and Replace Text"

Introduced before R2006a

islogical

Determine if input is logical array

Syntax

```
tf = islogical(A)
```

Description

`tf = islogical(A)` returns `true` if `A` is a logical array and `false` otherwise. `islogical` also returns `true` if `A` is an instance of a class that is derived from the `logical` class.

Examples

These examples show the values `islogical` returns when passed specific types:

```
% Relational operators return logical values
islogical(5<7)
ans =
     1

% true and false return logical values
islogical(true) & islogical(false)
ans =
     1

% Constants are double-precision by default
islogical(1)
ans =
     0

% logical creates logical values
islogical(logical(1))
ans =
     1
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`is*` | `isa` | `logical`

Topics

"Determine if Arrays Are Logical"

Introduced before R2006a

ismac

Determine if version is for macOS platform

Syntax

```
tf = ismac
```

Description

`tf = ismac` returns logical `1` (`true`) if the version of MATLAB software is for the Apple macOS platform. Otherwise, it returns logical `0` (`false`).

Examples

Execute MATLAB Command Based on Platform

```
if ismac
    % Code to run on Mac plaform
elseif isunix
    % Code to run on Linux plaform
elseif ispc
    % Code to run on Windows platform
else
    disp('Platform not supported')
end
```

Tips

- The `isunix` function also determines if version is for macOS platforms.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Returns true or false based on the MATLAB version used for code generation.
- Use only when the code generation target is S-function (Simulation) or MEX-function.

See Also

See Also

`computer` | `is*` | `ispc` | `isstudent` | `isunix`

Introduced in R2007a

ismatrix

Determine whether input is matrix

Syntax

```
ismatrix(V)
```

Description

`ismatrix(V)` returns logical 1 (`true`) if `size(V)` returns `[m n]` with nonnegative integer values `m` and `n`, and logical 0 (`false`) otherwise.

Examples

Determine Matrix

```
M = rand(3,3,3);
ismatrix(M)
```

```
ans = logical
   0
```

```
N = M(:,:);
ismatrix(N)
```

```
ans = logical
   1
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`iscolumn` | `isrow` | `isscalar` | `isvector`

Introduced in R2010b

ismember

Array elements that are members of set array

Syntax

```
Lia = ismember(A,B)
Lia = ismember(A,B,'rows')
[Lia,Locb] = ismember(A,B)
[Lia,Locb] = ismember(A,B,'rows')
```

```
[Lia,Locb] = ismember(___,'legacy')
```

Description

`Lia = ismember(A,B)` returns an array containing logical `1` (`true`) where the data in `A` is found in `B`. Elsewhere, the array contains logical `0` (`false`).

- If `A` and `B` are tables or timetables, then `ismember` returns a logical value for each row. For timetables, `ismember` takes row times into account to determine equality. The output, `Lia`, is a column vector.

`Lia = ismember(A,B,'rows')` treats each row of `A` and each row of `B` as single entities and returns a column vector containing logical `1` (`true`) where the rows of `A` are also rows of `B`. Elsewhere, the array contains logical `0` (`false`).

The `'rows'` option does not support cell arrays, unless one of the inputs is either a categorical array or a datetime array.

`[Lia,Locb] = ismember(A,B)` also returns an array, `Locb`.

- Generally, `Locb` contains the lowest index in `B` for each value in `A` that is a member of `B`. Values of `0` indicate where `A` is not a member of `B`.
- If `A` and `B` are tables or timetables, then `Locb` contains the lowest index in `B` for each row in `A` that is also a row in `B`. Values of `0` indicate where `A` is not a row of `B`.

`[Lia,Locb] = ismember(A,B,'rows')` also returns a column vector, `Locb`, containing the lowest index in `B` for each row in `A` that is also a row in `B`. Values of `0` indicate where `A` is not a row of `B`.

`[Lia,Locb] = ismember( ___ ,'legacy')` preserves the behavior of the `ismember` function from R2012b and prior releases using any of the input arguments in previous syntaxes.

The `'legacy'` option does not support categorical arrays, datetime arrays, duration arrays, tables, or timetables.

Examples

Values That Are Members of Set

Create two vectors with values in common.

```
A = [5 3 4 2];
B = [2 4 4 4 6 8];
```

Determine which elements of `A` are also in `B`.

```
Lia = ismember(A,B)
```

```
Lia = 1×4 logical array
   0   0   1   1
```

`A(3)` and `A(4)` are found in `B`.

Table Rows Found in Another Table

Create two tables with rows in common.

```
A = table([1:5]',['A';'B';'C';'D';'E'],logical([0;1;0;1;0]))
```

```
A = 5×3 table
    Var1    Var2    Var3
    ____    ____    _____

    1       A       false
    2       B       true
    3       C       false
    4       D       true
    5       E       false
```

```
B = table([1:2:10]',['A';'C';'E';'G';'I'],logical(zeros(5,1)))
```

```
B = 5×3 table
    Var1    Var2    Var3
    ____    ____    _____

    1       A       false
    3       C       false
    5       E       false
    7       G       false
    9       I       false
```

Determine which rows of A are also in B.

```
Lia = ismember(A,B)
```

```
Lia = 5×1 logical array
   1
   0
   1
   0
   1
```

A(1,:), A(3,:), and A(5,:) are found in B.

Members of Set and Indices to Values

Create two vectors with values in common.

```
A = [5 3 4 2];
B = [2 4 4 4 6 8];
```

Determine which elements of A are also in B as well as their corresponding locations in B.

```
[Lia,Locb] = ismember(A,B)
```

```
Lia = 1×4 logical array
   0   0   1   1


Locb =
```

```
     0     0     2     1
```

The lowest index to `A(3)` is `B(2)`, and `A(4)` is found in `B(1)`.

Rows of Another Table and Their Location

Create a table, `A`, of gender, age, and height for five people.

```
A = table(['M';'M';'F';'M';'F'],[27;52;31;46;35],[74;68;64;61;64],...
'VariableNames',{'Gender' 'Age' 'Height'},...
'RowNames',{'Ted' 'Fred' 'Betty' 'Bob' 'Judy'})
```

```
A = 5×3 table
             Gender    Age    Height
             ______    ___    ______

    Ted      M         27     74
    Fred     M         52     68
    Betty    F         31     64
    Bob      M         46     61
    Judy     F         35     64
```

Create another table, `B`, with rows in common with `A`.

```
B = table(['M';'F';'F';'F'],[47;31;35;23],[68;64;62;58],...
'VariableNames',{'Gender' 'Age' 'Height'},...
'RowNames',{'Joe' 'Meg' 'Beth' 'Amy'})
```

```
B = 4×3 table
            Gender    Age    Height
            ______    ___    ______

    Joe     M         47     68
    Meg     F         31     64
    Beth    F         35     62
    Amy     F         23     58
```

Determine which rows of `A` are also in `B`, as well as their corresponding locations in `B`.

```
[Lia,Locb] = ismember(A,B)
```

```
Lia = 5×1 logical array
   0
   0
   1
   0
   0


Locb =

     0
     0
     2
     0
     0
```

Two rows that have the same values, but different names, are considered equal. The same data for `Betty` is found in `B(2,:)`, which corresponds to `Meg`.

Rows That Belong to a Set

Create two matrices with a row in common.

```
A = [1 3 5 6; 2 4 6 8];
B = [2 4 6 8; 1 3 5 7; 2 4 6 8];
```

Determine which rows of `A` are also in `B` as well as their corresponding locations in `B`.

```
[Lia, Locb] = ismember(A,B, 'rows')
```

```
Lia = 2×1 logical array
   0
   1


Locb =

     0
     1
```

The lowest index to `A(2,:)` is `B(1,:)`.

Members of Set Containing NaN Values

Create two vectors containing NaN.

```
A = [5 NaN NaN];
B = [5 NaN NaN];
```

Determine which elements of A are also in B, as well as their corresponding locations in B.

```
[Lia,Locb] = ismember(A,B)
```

```
Lia = 1×3 logical array
   1   0   0


Locb =

     1     0     0
```

`ismember` treats NaN values as distinct.

Cell Array of Character Vectors with Trailing White Space

Create a cell array of character vectors, A.

```
A = {'dog','cat','fish','horse'};
```

Create a cell array of character vectors, B, where some of the vectors have trailing white space.

```
B = {'dog ','cat','fish ','horse'};
```

Determine which character vectors of A are also in B.

```
[Lia,Locb] = ismember(A,B)
```

```
Lia = 1×4 logical array
   0   1   0   1


Locb =

     0     2     0     4
```

`ismember` treats trailing white space in cell arrays of character vectors as distinct characters.

Members of Char and Cell Array of Character Vectors

Create a character vector, A, and a cell array of character vectors, B.

```
A = ['cat';'dog';'fox';'pig'];
B = {'dog','cat','fish','horse'};
```

Determine which character vectors of A are also in B.

```
[Lia,Locb] = ismember(A,B)
```

```
Lia = 4×1 logical array
   1
   1
   0
   0


Locb =

     2
     1
     0
     0
```

Preserve Legacy Behavior of ismember

Use the `'legacy'` flag to preserve the behavior of `ismember` from R2012b and prior releases in your code.

Find the members of B with the current behavior.

```
A = [5 3 4 2];
B = [2 4 4 4 6 8];
[Lia1,Locb1] = ismember(A,B)
```

```
Lia1 = 1×4 logical array
```

```
   0   0   1   1


Locb1 =

     0     0     2     1
```

Find the members of B, and preserve the legacy behavior.

```
[Lia2,Locb2] = ismember(A,B,'legacy')
```

```
Lia2 = 1×4 logical array
   0   0   1   1


Locb2 =

     0     0     4     1
```

Input Arguments

A — Query array

numeric arrays | logical arrays | character arrays | string arrays | categorical arrays | datetime arrays | duration arrays | cell arrays of character vectors | tables | timetables

Query array, specified as a numeric array, logical array, character array, string array, categorical array, datetime array, duration array, cell array of character vectors, table, or timetable. If you specify the `'rows'` option, A and B must have the same number of columns.

A must belong to the same class as B with the following exceptions:

- `logical`, `char`, and all numeric classes can combine with `double` arrays.
- Cell arrays of character vectors can combine with character arrays or string arrays.
- Categorical arrays can combine with character arrays, cell arrays of character vectors, or string arrays.
- Datetime arrays can combine with cell arrays of date character vectors or single date character vectors.

There are additional requirements for A and B based on data type:

- If A and B are both ordinal categorical arrays, they must have the same sets of categories, including their order. If neither A nor B are ordinal, they need not have the same sets of categories, and the comparison is performed using the category names.
- If A is a table or timetable, it must have the same variable names as B (except for order). For tables, row names are ignored, so that two rows that have the same values, but different names, are considered equal. For timetables, row times are taken into account, so that two rows that have the same values, but different times, are not considered equal.
- If A and B are datetime arrays, they must be consistent with each other in whether they specify a time zone.

A also can be an object with the following class methods:

- `sort` (or `sortrows` for the `'rows'` option)
- `eq`
- `ne`

The object class methods must be consistent with each other. These objects include heterogeneous arrays derived from the same root class. For example, A can be an array of handles to graphics objects.

B — Set array

numeric arrays | logical arrays | character arrays | string arrays | categorical arrays | datetime arrays | duration arrays | cell arrays of character vectors | tables | timetables

Set array, specified as a numeric array, logical array, character array, string array, categorical array, datetime array, duration array, cell array of character vectors, table, or timetable. If you specify the `'rows'` option, A and B must have the same number of columns.

B must belong to the same class as A with the following exceptions:

- `logical`, `char`, and all numeric classes can combine with `double` arrays.
- Cell arrays of character vectors can combine with character arrays or string arrays.
- Categorical arrays can combine with character arrays, cell arrays of character vectors, or string arrays.
- Datetime arrays can combine with cell arrays of date character vectors or single date character vectors.

There are additional requirements for A and B based on data type:

- If A and B are both ordinal categorical arrays, they must have the same sets of categories, including their order. If neither A nor B are ordinal, they need not have the same sets of categories, and the comparison is performed using the category names.
- If B is a table or timetable, it must have the same variable names as A (except for order). For tables, row names are ignored, so that two rows that have the same values, but different names, are considered equal. For timetables, row times are taken into account, so that two rows that have the same values, but different times, are not considered equal.
- If A and B are datetime arrays, they must be consistent with each other in whether they specify a time zone.

B also can be an object with the following class methods:

- `sort` (or `sortrows` for the `'rows'` option)
- `eq`
- `ne`

The object class methods must be consistent with each other. These objects include heterogeneous arrays derived from the same root class. For example, B can be an array of handles to graphics objects.

Output Arguments

`Lia` — Logical index to A

vector | matrix | N-D array

Logical index to A, returned as a vector, matrix or N-D array containing logical `1` (`true`) wherever the values (or rows) in A are members of B. Elsewhere, it contains logical `0` (`false`).

`Lia` is an array of the same size as A, unless you specify the `'rows'` flag.

If the `'rows'` flag is specified or if A is a table or timetable, `Lia` is a column vector with the same number of rows as A.

`Locb` — Locations in B

vector | matrix | N-D array

Locations in B, returned as a vector, matrix, or N-D array. If the `'legacy'` flag is not specified, `Locb` contains the lowest indices to the values (or rows) in B that are found in A. Values of `0` indicate where A is not a member of B.

`Locb` is an array of the same size as A unless you specify the `'rows'` flag.

If the `'rows'` flag is specified or if A is a table or timetable, `Locb` is a column vector with the same number of rows as A.

Tips

- To find the rows from table or timetable A that are found in B with respect to a subset of variables, you can use column subscripting. For example, you can use `ismember(A(:,vars),B(:,vars))`, where *`vars`* is a positive integer, a vector of positive integers, a variable name, a cell array of variable names, or a logical vector. Alternatively, you can use `vartype` to create a subscript that selects variables of a specified type.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

Input A must be a tall array, and input B must be an in-memory array.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not support cell arrays for the first or second arguments.
- Complex inputs must be `single` or `double`.
- See "Code Generation for Complex Data with Zero-Valued Imaginary Parts" (MATLAB Coder).

See Also

See Also

`intersect` | `ismembertol` | `issorted` | `setdiff` | `setxor` | `sort` | `union` | `unique`

Introduced before R2006a

ismembertol

Members of set within tolerance

Syntax

```
LIA = ismembertol(A,B,tol)
LIA = ismembertol(A,B)
[LIA,LocB] = ismembertol( ___ )
[ ___ ] = ismembertol( ___ ,Name,Value)
```

Description

`LIA = ismembertol(A,B,tol)` returns an array containing logical `1` (`true`) where the elements of `A` are within tolerance of the elements in `B`. Otherwise, the array contains logical `0` (`false`). Two values, `u` and `v`, are within tolerance if

```
abs(u-v) <= tol*max(abs([A(:);B(:)]))
```

That is, `ismembertol` scales the `tol` input based on the magnitude of the data.

`ismembertol` is similar to `ismember`. Whereas `ismember` performs exact comparisons, `ismembertol` performs comparisons using a tolerance.

`LIA = ismembertol(A,B)` uses a default tolerance of `1e-6` for single-precision inputs and `1e-12` for double-precision inputs.

`[LIA,LocB] = ismembertol( ___ )` also returns an array, `LocB`, that contains the index location in `B` for each element in `A` that is a member of `B`. You can use any of the input arguments in previous syntaxes.

`[ ___ ] = ismembertol( ___ ,Name,Value)` uses additional options specified by one or more Name-Value pair arguments using any of the input or output argument combinations in previous syntaxes. For example, `ismembertol(A,B,'ByRows',true)` compares the rows of `A` and `B` and returns a logical column vector.

Examples

Set Members in Presence of Numerical Error

Create a vector, `x`. Obtain a second vector, `y`, by transforming and untransforming `x`. This transformation introduces round-off differences to `y`.

```
x = (1:6)'*pi;
y = 10.^log10(x);
```

Verify that `x` and `y` are not identical by taking the difference.

```
x-y
```

```
ans =

   1.0e-14 *

    0.0444
         0
         0
         0
         0
   -0.3553
```

Use `ismember` to find the elements of `x` that are in `y`. The `ismember` function performs exact comparisons and determines that some of the matrix elements in `x` are not members of `y`.

```
lia = ismember(x,y)
```

```
lia = 6×1 logical array
   0
   1
   1
   1
   1
   0
```

Use `ismembertol` to perform the comparison using a small tolerance. `ismembertol` treats elements that are within tolerance as equal and determines that all of the elements in `x` are members of `y`.

```
LIA = ismembertol(x,y)
```

```
LIA = 6×1 logical array
   1
   1
   1
   1
   1
   1
```

Determine Set Members by Rows

By default, `ismembertol` looks for *elements* that are within tolerance, but it also can find *rows* of a matrix that are within tolerance.

Create a numeric matrix, A. Obtain a second matrix, B, by transforming and untransforming A. This transformation introduces round-off differences to B.

```
A = [0.05 0.11 0.18; 0.18 0.21 0.29; 0.34 0.36 0.41; ...
    0.46 0.52 0.76; 0.82 0.91 1.00];
B = log10(10.^A);
```

Use `ismember` to find the rows of A that are in B. `ismember` performs exact comparisons and thus determines that most of the rows in A are not members of B, even though some of the rows differ by only a small amount.

```
lia = ismember(A,B,'rows')
```

```
lia = 5×1 logical array
   0
   0
   0
   0
   1
```

Use `ismembertol` to perform the row comparison using a small tolerance. `ismembertol` treats rows that are within tolerance as equal and thus determines that all of the rows in A are members of B.

```
LIA = ismembertol(A,B,'ByRows',true)
```

```
LIA = 5×1 logical array
```

```
   1
   1
   1
   1
   1
```

Average Similar Values in Vectors

Create two vectors of random numbers and determine which values in A are also members of B, using a tolerance. Specify `OutputAllIndices` as `true` to return all of the indices for the elements in B that are within tolerance of the corresponding elements in A.

```
rng(5)
A = rand(1,15);
B = rand(1,5);
[LIA,LocAllB] = ismembertol(A,B,0.2,'OutputAllIndices',true)
```

```
LIA = 1×15 logical array
   1   0   1   0   1   1   1   1   1   1   0   1   1   1   0


LocAllB = 1×15 cell array
    [2×1 double]    [0]    [2×1 double]    [0]    [3×1 double]    [2×1 double]    [4]
```

Find the average value of the elements in B that are within tolerance of the value `A(13)`. The cell `LocAllB{13}` contains all the indices for elements in B that are within tolerance of `A(13)`.

```
A(13)
```

```
ans = 0.4413
```

```
allB = B(LocAllB{13})
```

```
allB =

    0.2741    0.4142    0.2961    0.5798


aveB = mean(allB)
```

```
aveB = 0.3911
```

Specify Absolute Tolerance

By default, `ismembertol` uses a tolerance test of the form `abs(u-v) <= tol*DS`, where `DS` automatically scales based on the magnitude of the input data. You can specify a different `DS` value to use with the `DataScale` option. However, absolute tolerances (where `DS` is a scalar) do not scale based on the magnitude of the input data.

First, compare two small values that are a distance `eps` apart. Specify `tol` and `DS` to make the within tolerance equation `abs(u-v) <= 10^-6`.

```
x = 0.1;
ismembertol(x, exp(log(x)), 10^-6, 'DataScale', 1)
```

```
ans = logical
   1
```

Next, increase the magnitude of the values. The round-off error in the calculation `exp(log(x))` is proportional to the magnitude of the values, specifically to `eps(x)`. Even though the two large values are a distance `eps` from one another, `eps(x)` is now much larger. Therefore, `10^-6` is no longer a suitable tolerance.

```
x = 10^10;
ismembertol(x, exp(log(x)), 10^-6, 'DataScale', 1)
```

```
ans = logical
   0
```

Correct this issue by using the default (scaled) value of `DS`.

```
Y = [0.1 10^10];
ismembertol(Y, exp(log(Y)))
```

```
ans = 1×2 logical array
   1   1
```

Specify DataScale by Column

Create a set of random 2-D points, and then use `ismembertol` to group the points into vertical bands that have a similar (within-tolerance) x-coordinate to a small set of query points, `B`. Use these options with `ismembertol`:

- Specify `ByRows` as `true`, since the point coordinates are in the rows of `A` and `B`.
- Specify `OutputAllIndices` as `true` to return the indices for all points in `A` that have an x-coordinate within tolerance of the query points in `B`.
- Specify DataScale as `[1 Inf]` to use an absolute tolerance for the x-coordinate, while ignoring the y-coordinate.

```
A = rand(1000,2);
B = [(0:.2:1)',0.5*ones(6,1)];
[LIA,LocAllB] = ismembertol(B, A, 0.1, 'ByRows', true, ...
    'OutputAllIndices', true, 'DataScale', [1,Inf])
```

```
LIA = 6×1 logical array
   1
   1
   1
   1
   1
   1


LocAllB = 6×1 cell array
    [ 94×1 double]
    [223×1 double]
    [195×1 double]
    [212×1 double]
    [187×1 double]
    [ 89×1 double]
```

Plot the points in `A` that are within tolerance of each query point in `B`.

```
hold on
plot(B(:,1),B(:,2),'x')
for k = 1:length(LocAllB)
    plot(A(LocAllB{k},1), A(LocAllB{k},2),'.')
end
```

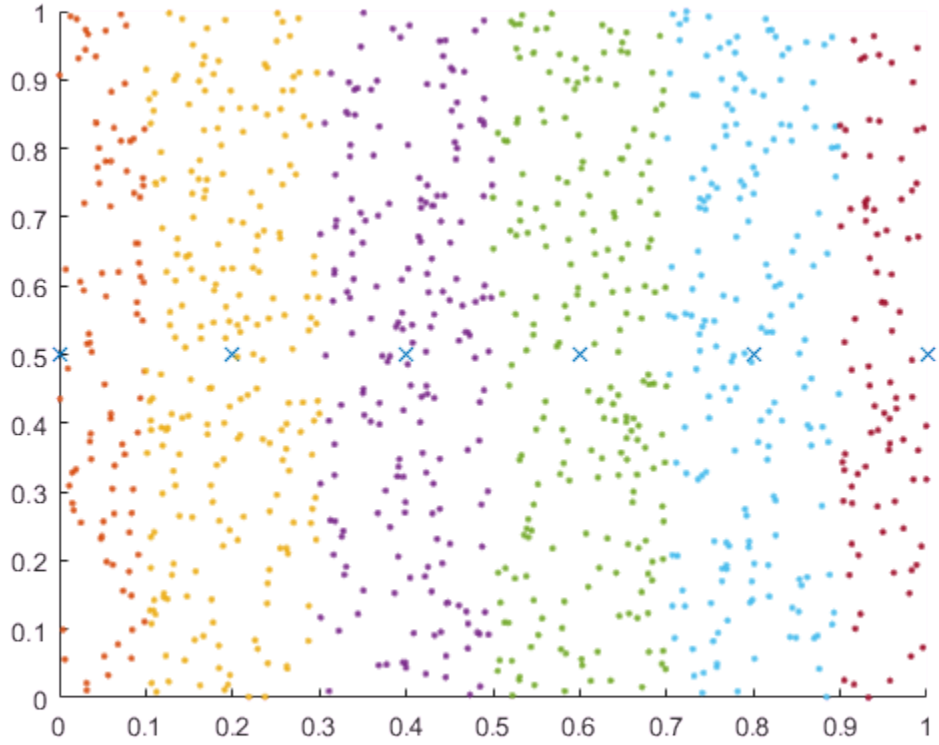

- "Group Scattered Data Using a Tolerance"

Input Arguments

A — Query array

scalar | vector | matrix | multidimensional array

Query array, specified as a scalar, vector, matrix, or multidimensional array. Inputs A and B must be full.

If you specify the ByRows option, then A and B must have the same number of columns.

Data Types: `single` | `double`

B — Query array
scalar | vector | matrix | multidimensional array

Query array, specified as a scalar, vector, matrix, or multidimensional array. Inputs `A` and `B` must be full.

If you specify the `ByRows` option, then `A` and `B` must have the same number of columns.

Data Types: `single` | `double`

`tol` — Comparison tolerance
positive real scalar

Comparison tolerance, specified as a positive real scalar. `ismembertol` scales the `tol` input using the maximum absolute values in the input arrays `A` and `B`. Then `ismembertol` uses the resulting scaled comparison tolerance to determine which elements in `A` are also a member of `B`. If two elements are within tolerance of each other, then `ismembertol` considers them to be equal.

Two values, `u` and `v`, are within tolerance if `abs(u-v) <= tol*max(abs([A(:);B(:)]))`.

To specify an absolute tolerance, specify both `tol` and the `'DataScale'` Name-Value pair.

Example: `tol = 0.05`

Example: `tol = 1e-8`

Example: `tol = eps`

Data Types: `single` | `double`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `LIA = ismembertol(A,B,'ByRows',true)`

`'OutputAllIndices'` — Output index type
`false` (default) | `true` | `0` | `1`

Output index type, specified as the comma-separated pair consisting of `'OutputAllIndices'` and either `false` (default), `true`, `0`, or `1`. `ismembertol` interprets numeric `0` as `false` and numeric `1` as `true`.

When `OutputAllIndices` is `true`, the `ismembertol` function returns the second output, `LocB`, as a cell array. The cell array contains the indices for *all* elements in `B` that are within tolerance of the corresponding value in `A`. That is, each cell in `LocB` corresponds to a value in `A`, and the values in each cell correspond to locations in `B`.

Example: `[LIA,LocAllB] = ismembertol(A,B,tol,'OutputAllIndices',true)`

`'ByRows'` — Row comparison toggle
`false` (default) | `true` | `0` | `1`

Row comparison toggle, specified as the comma-separated pair consisting of `'ByRows'` and either `false` (default), `true`, `0`, or `1`. `ismembertol` interprets numeric `0` as `false` and numeric `1` as `true`. Use this option to find rows in `A` and `B` that are within tolerance.

When `ByRows` is `true`:

- `ismembertol` compares the rows of `A` and `B` by considering each column separately. Thus, `A` and `B` must be 2-D arrays with the same number of columns.
- If the corresponding row in `A` is within tolerance of a row in `B`, then `LIA` contains logical `1` (`true`). Otherwise, it contains logical `0` (`false`).

Two rows, `u` and `v`, are within tolerance if `all(abs(u-v) <= tol*max(abs([A;B])))`.

Example: `LIA = ismembertol(A,B,tol,'ByRows',true)`

`'DataScale'` — Scale of data
scalar | vector

Scale of data, specified as the comma-separated pair consisting of `'DataScale'` and either a scalar or vector. Specify `DataScale` as a numeric scalar, `DS`, to change the tolerance test to be, `abs(u-v) <= tol*DS`.

When used together with the `ByRows` option, the `DataScale` value also can be a vector. In this case, each element of the vector specifies `DS` for a corresponding column in `A`. If

a value in the `DataScale` vector is `Inf`, then `ismembertol` ignores the corresponding column in `A`.

Example: `LIA = ismembertol(A,B,'DataScale',1)`

Example: `[LIA,LocB] = ismembertol(A,B,'ByRows',true,'DataScale',[eps(1) eps(10) eps(100)])`

Data Types: `single` | `double`

Output Arguments

`LIA` — Logical index to `A`

vector | matrix

Logical index to `A`, returned as a vector or matrix containing logical `1` (`true`) wherever the elements (or rows) in `A` are members of `B` (within tolerance). Elsewhere, `LIA` contains logical `0` (`false`).

`LIA` is the same size as `A`, unless you specify the `ByRows` option. In that case, `LIA` is a column vector with the same number of rows as `A`.

`LocB` — Locations in `B`

vector | matrix | cell array

Locations in `B`, returned as a vector, matrix, or cell array. `LocB` contains the indices to the elements (or rows) in `B` that are found in `A` (within tolerance). `LocB` contains `0` wherever an element in `A` is not a member of `B`.

If `OutputAllIndices` is `true`, then `ismembertol` returns `LocB` as a cell array. The cell array contains the indices for *all* elements in `B` that are within tolerance of the corresponding value in `A`. That is, each cell in `LocB` corresponds to a value in `A`, and the values in each cell correspond to locations in `B`.

`LocB` is the same size as `A`, unless you specify the `ByRows` option. In that case, `LocB` is a column vector with the same number of rows as `A`.

See Also

See Also

`eps` | `ismember` | `unique` | `uniquetol`

Topics

"Group Scattered Data Using a Tolerance"

Introduced in R2015a

ismethod

Determine if method of object

Syntax

```
tf = ismethod(obj,'methodName')
```

Description

`tf = ismethod(obj,'methodName')` returns logical `1` (`true`) if the specified `methodName` is a public method of object `obj`. Otherwise, returns logical `0` (`false`).

Examples

Determine if objects support equality testing:

```
if ismethod(obj1,'eq') && ismethod(obj2,'eq')
   tf = obj1 == obj2;
end
```

Tutorials

- "Methods"

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`isprop` | `methods` | `isobject` | `class`

Topics

"Methods"

Introduced before R2006a

ismethod (COM)

Determine whether input is COM object method

Syntax

```
tf = ismethod(h,'methodname')
```

Description

`tf = ismethod(h,'methodname')` returns logical `1` (`true`) if the specified `methodname` is a method you can call on COM object `h`. Otherwise, returns logical `0` (`false`).

COM functions are available on Microsoft Windows systems only.

Examples

Test members of an instance of a Microsoft Excel application.

```
h = actxserver('Excel.Application');
ismethod(h,'SaveWorkspace')
```

MATLAB returns `true`, `SaveWorkspace` is a method.

Try the same test on `UsableWidth`.

```
ismethod(h,'UsableWidth')
```

MATLAB returns `false`, `UsableWidth` is not a method; it is a property.

See Also

`methods` | `isprop` | `methodsview` | `isevent` | `isobject` | `class`

Topics

"Exploring Methods"

cool

Cool colormap array

Syntax

```
c = cool
c = cool(m)
```

Description

`c = cool` returns the cool colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = cool(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the cool colormap.

```
surf(peaks);
colormap('cool');
```

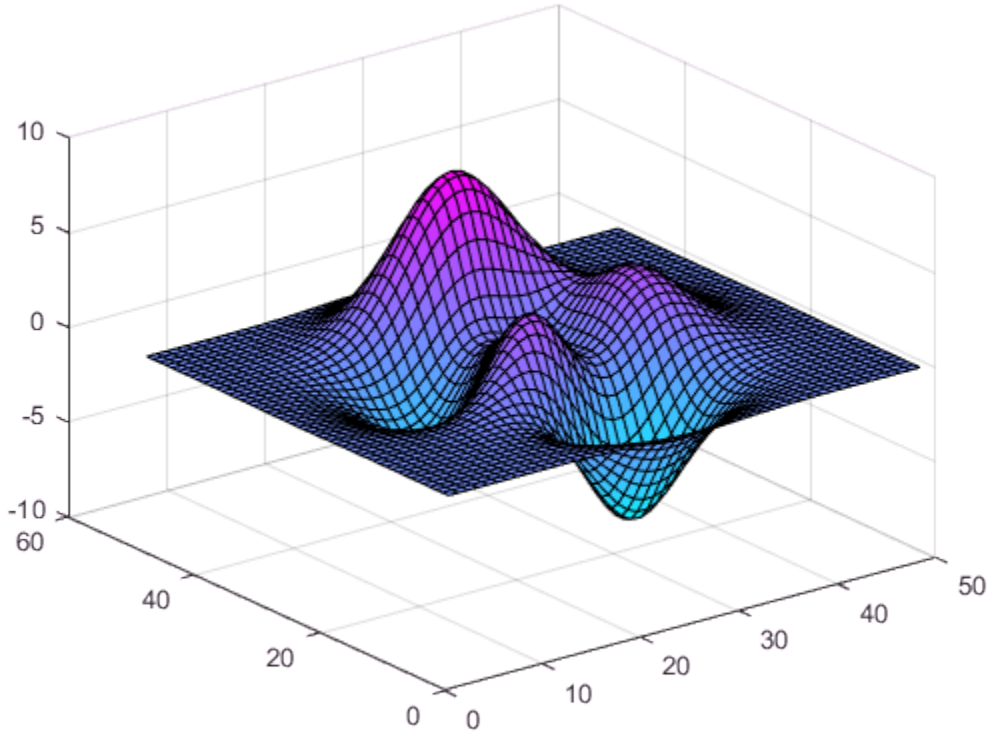

Get the cool colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = cool;
c = flipud(c);
colormap(c);
```

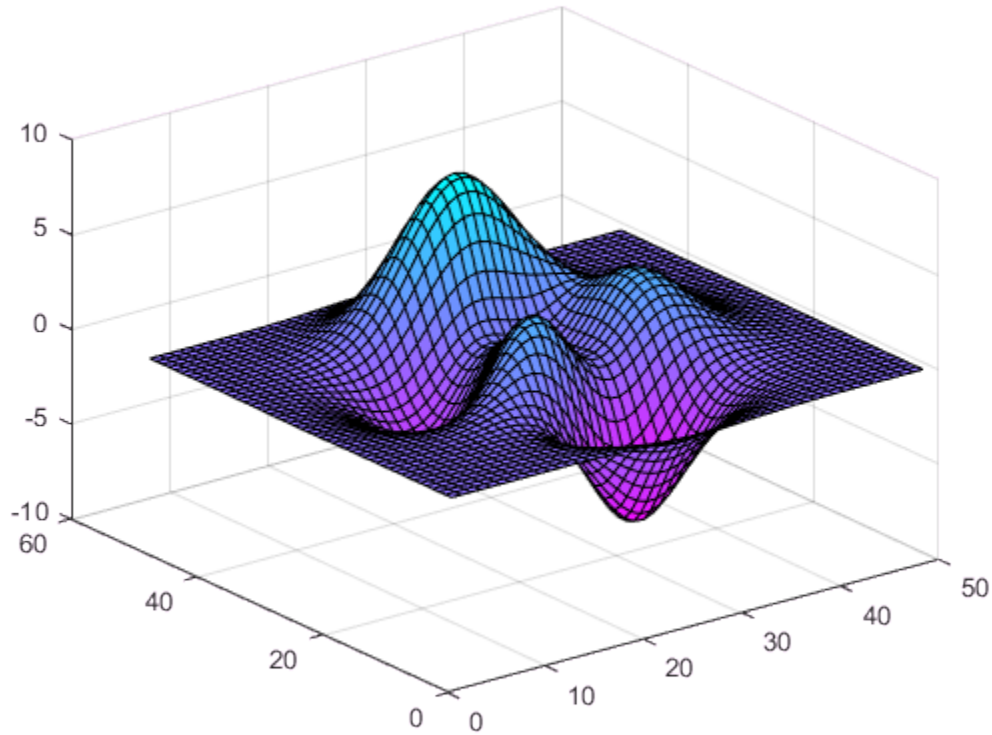

Downsample the Cool Colormap

Get a downsampled version of the cool colormap containing only ten colors. Then display the contours of the peaks function by applying the colormap and interpolated shading.

```
c = cool(10);
surf(peaks);
colormap(c);
shading interp;
```

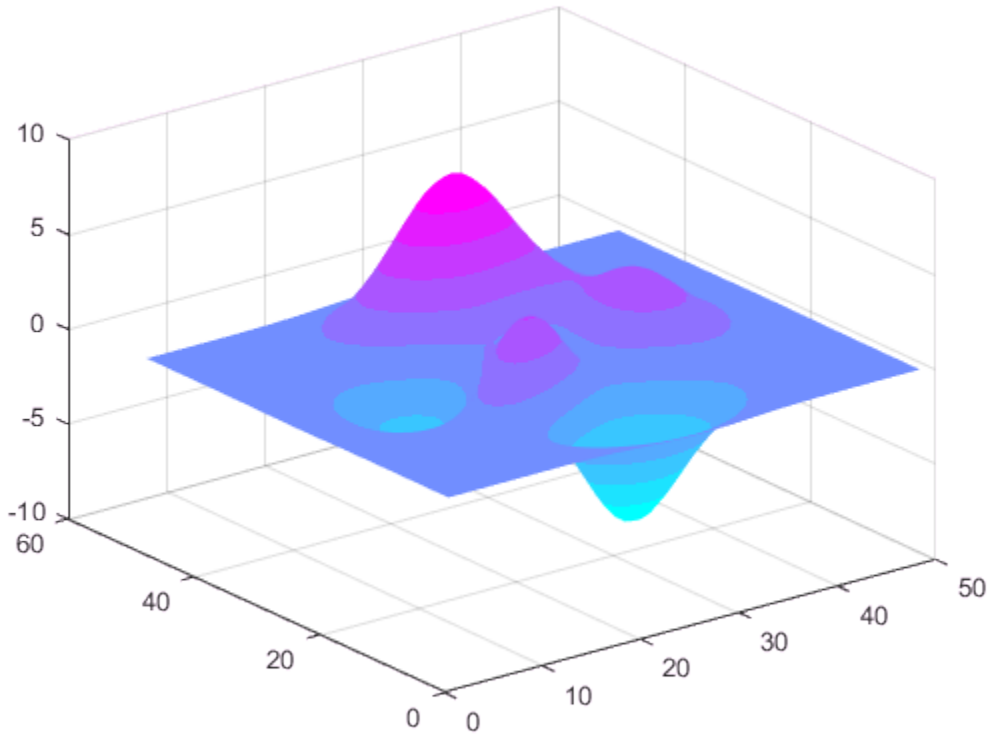

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

ismissing

Find missing values

Syntax

```
TF = ismissing(A)
TF = ismissing(A,indicator)
```

Description

`TF = ismissing(A)` returns a logical array that indicates which elements of an array or table contain missing values. The size of `TF` is the same as the size of `A`.

Standard missing values depend on the data type:

- `NaN` for `double`, `single`, `duration`, and `calendarDuration`
- `NaT` for `datetime`
- `<missing>` for `string`
- `<undefined>` for `categorical`
- `' '` for `char`
- `{''}` for `cell` of character vectors

`TF = ismissing(A,indicator)` treats the values in `indicator` as missing value indicators, ignoring all default indicators listed in the previous syntax. `indicator` can be a single indicator or multiple indicators. For example, if `A` is an array of type `double`, then `ismissing(A,[0,-99])` treats 0 and -99 as missing `double` values instead of `NaN`.

Examples

NaN Values in Vector

Create a row vector `A` that contains `NaN` values, and identify their location in `A`.

```
A = [3 NaN 5 6 7 NaN NaN 9];
TF = ismissing(A)
```

```
TF = 1×8 logical array
   0   1   0   0   0   1   1   0
```

Missing Values in Table with Various Data Types

Create a table with variables of different data types and find the elements with missing values.

```
dblVar = [NaN;3;5;7;9;11;13];
singleVar = single([1;NaN;5;7;9;11;13]);
cellstrVar = {'one';'three';'';'seven';'nine';'eleven';'thirteen'};
charVar = ['A';'C';'E';' ';'I';'J';'L'];
categoryVar = categorical({'red';'yellow';'blue';'violet';'';'ultraviolet';'orange'});
dateVar = [datetime(2015,1:2:10,15) NaT datetime(2015,11,15)]';
stringVar = ["a";"b";"c";"d";"e";"f";missing];

A = table(dblVar,singleVar,cellstrVar,charVar,categoryVar,dateVar,stringVar)
```

```
A = 7×7 table
    dblVar    singleVar    cellstrVar    charVar    categoryVar      dateVar      strin
    ______    _________    __________    _______    ___________    ___________    _____

    NaN         1          'one'         A          red            15-Jan-2015    "a"
      3       NaN          'three'       C          yellow         15-Mar-2015    "b"
      5         5          ''            E          blue           15-May-2015    "c"
      7         7          'seven'                  violet         15-Jul-2015    "d"
      9         9          'nine'        I          <undefined>    15-Sep-2015    "e"
     11        11          'eleven'      J          ultraviolet    NaT            "f"
     13        13          'thirteen'    L          orange         15-Nov-2015    <miss
```

`ismissing` returns 1 where the corresponding element in `A` has a missing value.

```
TF = ismissing(A)
```

```
TF = 7×7 logical array
   1   0   0   0   0   0   0
   0   1   0   0   0   0   0
   0   0   1   0   0   0   0
   0   0   0   1   0   0   0
   0   0   0   0   1   0   0
```

```
   0    0    0    0    0    1    0
   0    0    0    0    0    0    1
```

The size of TF is the same as the size of A.

Specify Indicators for Missing Values in Table

Create a table where 'NA', '', -99, NaN, and Inf represent missing values. Then, find the elements with missing values.

```
dblVar = [NaN;3;Inf;7;9];
int8Var = int8([1;3;5;7;-99]);
cellstrVar = {'one';'three';'';'NA';'nine'};
charVar = ['A';'C';'E';' ';'I'];

A = table(dblVar,int8Var,cellstrVar,charVar)
```

```
A = 5×4 table
    dblVar    int8Var    cellstrVar    charVar
    ______    _______    __________    _______

    NaN         1        'one'         A
      3         3        'three'       C
    Inf         5        ''            E
      7         7        'NA'
      9       -99        'nine'        I
```

ismissing returns 1 where the corresponding element in A has a missing value.

```
id = {'NA' '' -99 NaN Inf};
TF = ismissing(A,id)
```

```
TF = 5×4 logical array
   1    0    0    0
   0    0    0    0
   1    0    1    0
   0    0    1    1
   0    1    0    0
```

ismissing ignores trailing white space in character arrays. Therefore, since the empty character vector, '', is specified as a missing value indicator, ismissing identifies the

empty character vector in `A.cellstrVar` and also the blank space in `A.charVar` as missing values.

Input Arguments

A — Input data

vector | matrix | multidimensional array | table | timetable

Input data, specified as a vector, matrix, multidimensional array, table, or timetable. If `A` is a timetable, then `ismissing` operates on the table data only and ignores `NaT` or `NaN` values in the vector of row times.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `table` | `timetable` | `categorical` | `datetime` | `duration` | `calendarDuration`

`indicator` — Missing value indicator

scalar | vector | cell array

Missing value indicators, specified as a scalar, vector, or cell array. If `A` is an array, then `indicator` must be a vector. If `A` is a table or timetable, then `indicator` can also be a cell array with entries of multiple data types.

The entries of `indicator` indicate the values that `ismissing` treats as missing. Specifying `indicator` overrides all default standard missing indicators. If you want to add indicators while maintaining the list of standard indicators, then you must include all default indicators as elements of `indicator`. For example, if `A` is a table with `categorical` and numeric values, use `ismissing(A,{-99,'<undefined>'})` to indicate `-99` as a missing numeric value, but preserve `<undefined>` as a missing `categorical` value.

You can also use the `missing` value as an indicator for any missing data represented as `NaN`, `NaT`, `missing`, or `<undefined>`. If your input is a table, then `missing` is also an indicator for missing character vectors (`'  '`) and missing cell arrays of character vectors (`{''}`).

Indicator data types match data types in the entries of `A`. The following are additional data type matches between the indicator and elements of `A`:

- `double` indicators match `double`, `single`, integer, and `logical` entries of `A`.

- `string` and `char` indicators, and indicators that are cell arrays of character vectors, match `string` entries of `A`.
- `string` and `char` indicators match `categorical` entries of `A`.

Example: `TF = ismissing(A,0)` recognizes only `0` as a missing value.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `datetime` | `duration`

Tips

- Since integer variables cannot store `NaN`, use a special integer value (otherwise unused) to indicate missing integer data, such as `-99`.

Algorithms

`ismissing` handles leading and trailing white space differently for indicators that are cell arrays of character vectors, character arrays, or categorical arrays.

- For cell arrays of character vectors, `ismissing` does not ignore indicator white space. All character vectors must match exactly.
- For character arrays, `ismissing` ignores trailing white space in the indicator.
- For categorical arrays, `ismissing` ignores leading and trailing white space in the indicator.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`fillmissing` | `isempty` | `isnan` | `isundefined` | `missing` | `rmmissing` | `standardizeMissing` | `table`

Introduced in R2013b

isnan

Array elements that are NaN

Syntax

```
TF = isnan(A)
```

Description

`TF = isnan(A)` returns an array the same size as `A` containing logical 1 (`true`) where the elements of `A` are `NaN`s and logical 0 (`false`) where they are not. For a complex number `z`, `isnan(z)` returns `1` if either the real or imaginary part of `z` is `NaN`, and `0` if both the real and imaginary parts are finite or `Inf`.

For any real `A`, exactly one of the three quantities `isfinite(A)`, `isinf(A)`, and `isnan(A)` is equal to one.

Examples

NaN Elements in Vector

Determine the `NaN` elements of the row vector, `A`.

```
A = 0./[-2 -1 0 1 2]
```

```
A =

     0     0   NaN     0     0


```

```
TF = isnan(A)
```

```
TF = 1×5 logical array
   0   0   1   0   0
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`isfinite` | `ismissing` | `isinf` | `is*` | `nan`

Introduced before R2006a

isnat

Determine NaT (Not-a-Time) elements

Syntax

```
tf = isnat(A)
```

Description

`tf = isnat(A)` returns an array the same size as the datetime array, `A`, containing logical 1 (`true`) where the elements of `A` are Not-a-Time (`NaT`s) and logical 0 (`false`) where they are not. `NaT` represents a datetime that is undefined.

Examples

Determine If Array Elements are NaT

Create a datetime array from numeric values containing `NaN`.

```
d = datetime(2014,[1 2 NaN 4],1)
```

```
d = 1×4 datetime array
   01-Jan-2014   01-Feb-2014   NaT           01-Apr-2014
```

Determine if any elements of `d` are `NaT` (Not-a-Time).

```
isnat(d)
```

```
ans = 1×4 logical array
   0   0   1   0
```

Input Arguments

A — Input array
datetime array

Input array, specified as a datetime array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`isfinite` | `isinf`

Introduced in R2014b

isnumeric

Determine if input is numeric array

Syntax

```
tf = isnumeric(A)
```

Description

`tf = isnumeric(A)` returns `true` if `A` is a numeric array and `false` otherwise.

A numeric array is any of the following numeric types and any subclasses of those types:

MATLAB Numeric Types

`single`	Single-precision floating-point array
`double`	Double-precision floating-point array
`int8`	8-bit signed integer array
`uint8`	8-bit unsigned integer array
`int16`	16-bit signed integer array
`uint16`	16-bit unsigned integer array
`int32`	32-bit signed integer array
`uint32`	32-bit unsigned integer array
`int64`	64-bit signed integer array
`uint64`	64-bit unsigned integer array

Examples

These examples show the values `isnumeric` returns when passed specific types:

```
% pi returns a numeric value
isnumeric(pi)
```

```
ans =
     1
% Complex numbers are numeric
isnumeric(3+7i)
ans =
     1
% Integers are numeric
isnumeric(uint8(1:255))
ans =
     1
% isnumeric returns a logical value
isnumeric(isnumeric(pi))
ans =
     0
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`isfloat` | `isinteger` | `isnan` | `isreal` | `isprime` | `isfinite` | `isinf` | `isa` | `is*`

Introduced before R2006a

isobject

Determine if input is MATLAB object

Syntax

```
tf = isobject(A)
```

Description

`tf = isobject(A)` returns `true` if `A` is an object of a MATLAB class. Otherwise, it returns `false`.

Instances of MATLAB fundamental classes return `false`. Use `isa` to test for any of these types. See "Fundamental MATLAB Classes" for more on these classes.

Examples

Define the following MATLAB class:

```
classdef button < handle
   properties
      UiHandle
   end
   methods
      function obj = button(pos)
         obj.UiHandle = uicontrol('Position',pos,...
            'Style','pushbutton');
      end
   end
end
```

Test for MATLAB objects.

```
h = button([20 20 60 60]);
isobject(h)
```

```
ans =
```

```
  logical

   1
```

```
isobject(h.UiHandle)
```

```
ans =

  logical

   1
```

Create an object that is a MATLAB numeric type:

```
a = pi;
isobject(a)
```

```
  logical
     0
```

```
isa(a,'double')
```

```
ans =

  logical

   1
```

Tutorials

- "Class Components"

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`class` | `isa` | `is*`

Topics

"Class Components"

Introduced before R2006a

isocaps

Compute isosurface end-cap geometry

Syntax

```
fvc = isocaps(X,Y,Z,V,isovalue)
fvc = isocaps(V,isovalue)
fvc = isocaps(...,'enclose')
fvc = isocaps(...,'whichplane')
[f,v,c] = isocaps(...)
isocaps(...)
```

Description

`fvc = isocaps(X,Y,Z,V,isovalue)` computes isosurface end-cap geometry for the volume data `V` at isosurface value `isovalue`. The arrays `X`, `Y`, and `Z` define the coordinates for the volume `V`.

The struct `fvc` contains the face, vertex, and color data for the end-caps and can be passed directly to the `patch` command.

`fvc = isocaps(V,isovalue)` assumes the arrays `X`, `Y`, and `Z` are defined as `[X,Y,Z] = meshgrid(1:n,1:m,1:p)` where `[m,n,p] = size(V)`.

`fvc = isocaps(...,'enclose')` specifies whether the end-caps enclose data values above or below the value specified in `isovalue`. The `'enclose'` option can be either `'above'` (default) or `'below'`.

`fvc = isocaps(...,'whichplane')` specifies on which planes to draw the end-caps. Possible values for `'whichplane'` are `'all'` (default), `'xmin'`, `'xmax'`, `'ymin'`, `'ymax'`, `'zmin'`, or `'zmax'`.

`[f,v,c] = isocaps(...)` returns the face, vertex, and color data for the end-caps in three arrays instead of the struct `fvc`.

`isocaps(...)` without output arguments draws a patch with the computed faces, vertices, and colors.

Examples

Compute Isosurface End-Cap Geometry

This example uses a data set that is a collection of MRI slices of a human skull. It illustrates the use of isocaps to draw the end-caps on this cutaway volume.

The red isosurface shows the outline of the volume (skull) and the end-caps show what is inside of the volume.

The patch created from the end-cap data (p2) uses interpolated face coloring, which means the gray colormap and the light sources determine how it is colored. The isosurface patch (p1) used a flat red face color, which is affected by the lights, but does not use the colormap.

```
load mri
D = squeeze(D);
D(:,1:60,:) = [];
p1 = patch(isosurface(D, 5),'FaceColor','red',...
 'EdgeColor','none');
p2 = patch(isocaps(D, 5),'FaceColor','interp',...
 'EdgeColor','none');
view(3)
axis tight
daspect([1,1,.4])
colormap(gray(100))
camlight left
camlight
lighting gouraud
isonormals(D,p1)
```

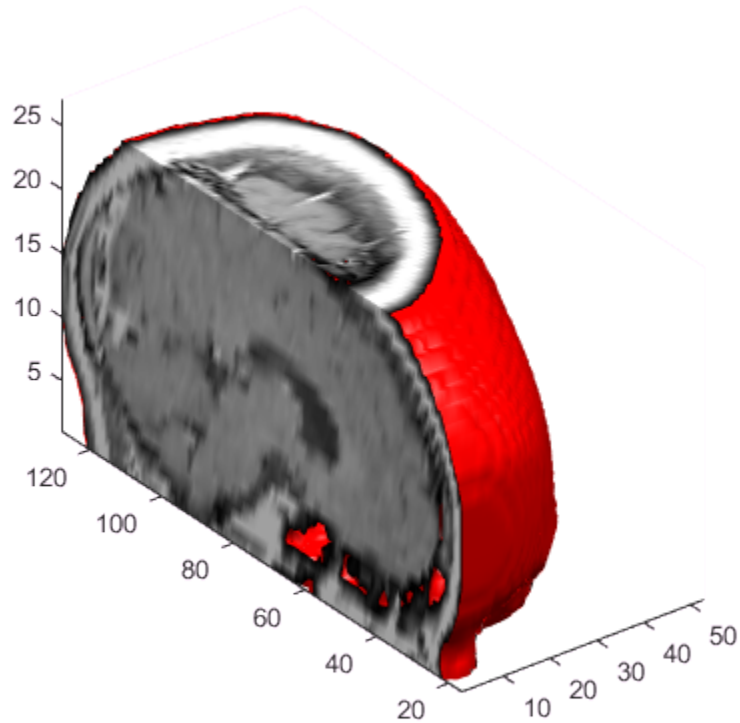

See Also

`isosurface` | `isonormals` | `smooth3` | `subvolume` | `reducevolume` | `reducepatch`

Topics

"Isocaps Add Context to Visualizations"

Introduced before R2006a

isocolors

Calculate isosurface and patch colors

Syntax

```
nc = isocolors(X,Y,Z,C,vertices)
nc = isocolors(X,Y,Z,R,G,B,vertices)
nc = isocolors(C,vertices)
nc = isocolors(R,G,B,vertices)
nc = isocolors(...,PatchHandle)
isocolors(...,PatchHandle)
```

Description

`nc = isocolors(X,Y,Z,C,vertices)` computes the colors of isosurface (patch object) vertices (`vertices`) using color values `C`. Arrays `X`, `Y`, `Z` define the coordinates for the color data in `C` and must be monotonic vectors that represent a Cartesian, axis-aligned grid (as if produced by `meshgrid`). The colors are returned in `nc`. `C` must be 3-D (index colors).

`nc = isocolors(X,Y,Z,R,G,B,vertices)` uses `R`, `G`, `B` as the red, green, and blue color arrays (true colors).

`nc = isocolors(C,vertices)`, and `nc = isocolors(R,G,B,vertices)` assume `X`, `Y`, and `Z` are determined by the expression

```
[X Y Z] = meshgrid(1:n,1:m,1:p)
```

where `[m n p] = size(C)`.

`nc = isocolors(...,PatchHandle)` uses the vertices from the patch identified by `PatchHandle`.

`isocolors(...,PatchHandle)` sets the FaceVertexCData property of the patch specified by `PatchHandle` to the computed colors.

Examples

Indexed Color Data

This example displays an isosurface and colors it with random data using indexed color.

```
[x,y,z] = meshgrid(1:20,1:20,1:20);
data = sqrt(x.^2 + y.^2 + z.^2);
cdata = smooth3(rand(size(data)),'box',7);
p = patch(isosurface(x,y,z,data,10));
isonormals(x,y,z,data,p)
isocolors(x,y,z,cdata,p)
p.FaceColor = 'interp';
p.EdgeColor = 'none';
view(150,30)
daspect([1 1 1])
axis tight
camlight
lighting gouraud
```

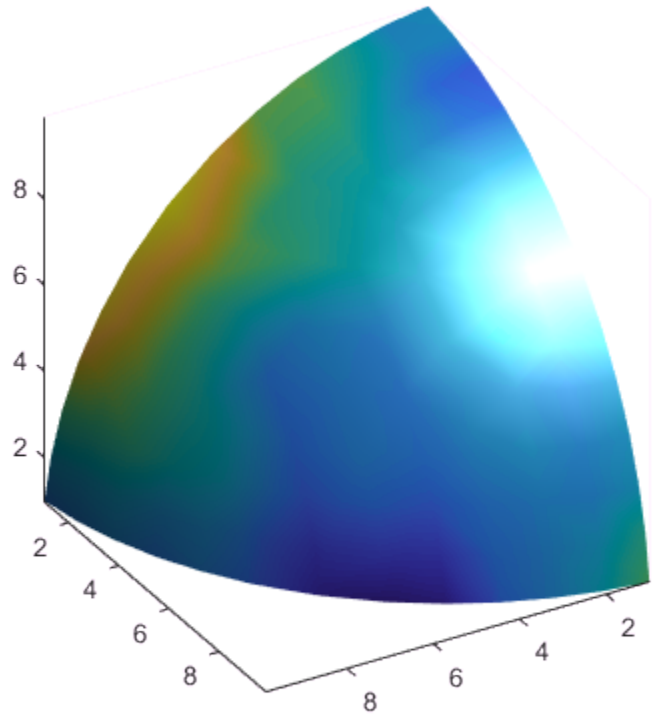

True Color Data

This example displays an isosurface and colors it with true color (RGB) data.

```
[x,y,z] = meshgrid(1:20,1:20,1:20);
data = sqrt(x.^2 + y.^2 + z.^2);
p = patch(isosurface(x,y,z,data,20));
isonormals(x,y,z,data,p)
[r,g,b] = meshgrid(20:-1:1,1:20,1:20);
isocolors(x,y,z,r/20,g/20,b/20,p)
p.FaceColor = 'interp';
p.EdgeColor = 'none';
view(150,30)
```

```
daspect([1 1 1])
camlight
lighting gouraud
```

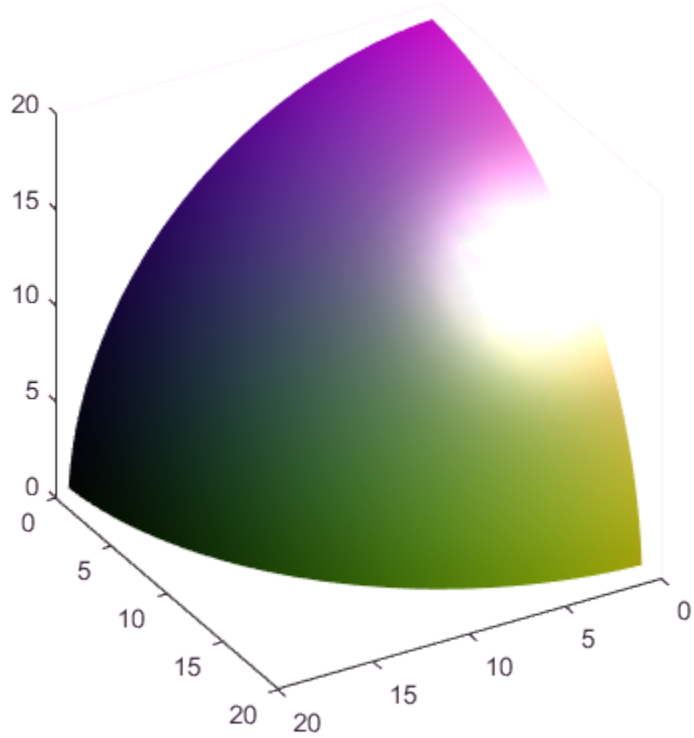

Modified True Color Data

This example uses `isocolors` to calculate the true color data using the isosurface's (patch object's) vertices, but then returns the color data in a variable (`c`) in order to modify the values. It then explicitly sets the isosurface's FaceVertexCData to the new data (`1-c`).

```
[x,y,z] = meshgrid(1:20,1:20,1:20);
```

```
data = sqrt(x.^2 + y.^2 + z.^2);
p = patch(isosurface(data,20));
isonormals(data,p)
[r,g,b] = meshgrid(20:-1:1,1:20,1:20);
c = isocolors(r/20,g/20,b/20,p);
p.FaceVertexCData = 1-c;
p.FaceColor = 'interp';
p.EdgeColor = 'none';
view(150,30)
daspect([1 1 1])
camlight
lighting gouraud
```

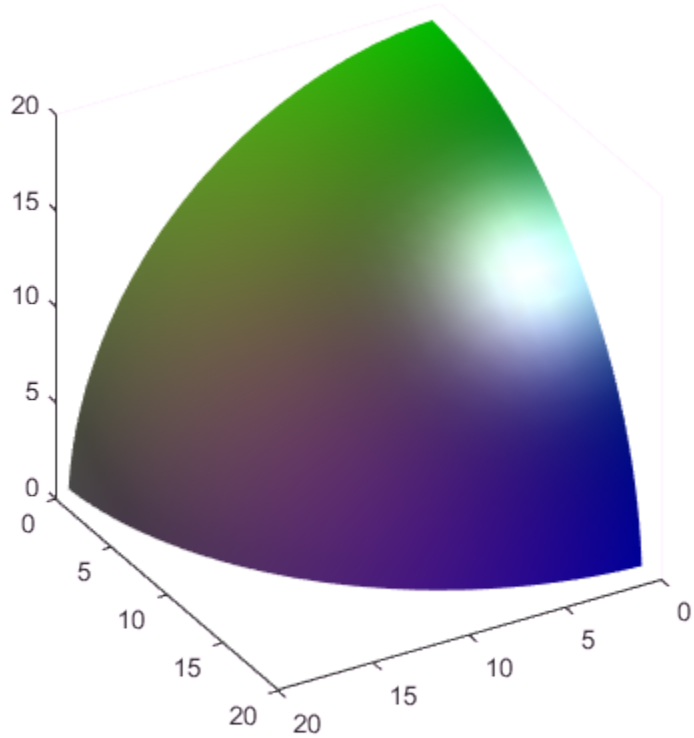

See Also

See Also

`isocaps` | `isonormals` | `isosurface` | `reducepatch` | `reducevolume` | `smooth3` | `subvolume`

Introduced before R2006a

isonormals

Compute normals of isosurface vertices

Syntax

```
n = isonormals(X,Y,Z,V,vertices)
n = isonormals(V,vertices)
n = isonormals(V,p)
n = isonormals(X,Y,Z,V,p)
n = isonormals(...,'negate')
isonormals(V,p)
isonormals(X,Y,Z,V,p)
```

Description

`n = isonormals(X,Y,Z,V,vertices)` computes the normals of the isosurface vertices from the vertex list, `vertices`, using the gradient of the data `V`. The arrays `X`, `Y`, and `Z` define the coordinates for the volume `V`. The computed normals are returned in `n`.

`n = isonormals(V,vertices)` assumes the arrays `X`, `Y`, and `Z` are defined as `[X,Y,Z] = meshgrid(1:n,1:m,1:p)` where `[m,n,p] = size(V)`.

`n = isonormals(V,p)` and `n = isonormals(X,Y,Z,V,p)` compute normals from the vertices of the patch identified by the handle `p`.

`n = isonormals(...,'negate')` negates (reverses the direction of) the normals.

`isonormals(V,p)` and `isonormals(X,Y,Z,V,p)` set the `VertexNormals` property of the patch identified by the handle `p` to the computed normals rather than returning the values.

Examples

Isosurface Using Different Types of Surface Normals

Compare the effect of different surface normals on the visual appearance of lit isosurfaces. In one case, the triangles used to draw the isosurface define the normals. In

the other, the isonormals function uses the volume data to calculate the vertex normals based on the gradient of the data points. The latter approach generally produces a smoother-appearing isosurface.

Define a 3-D array of volume data.

```
data = cat(3,[0 .2 0; 0 .3 0; 0 0 0],...
    [.1 .2 0; 0 1 0; .2 .7 0],...
    [0 .4 .2; .2 .4 0;.1 .1 0]);
data = interp3(data,3,'cubic');
```

Draw an isosurface from the volume data and add lights. This isosurface uses triangle normals.

```
figure
subplot(1,2,1)
fv = isosurface(data,.5);
p1 = patch(fv,'FaceColor','red','EdgeColor','none');
view(3)
daspect([1,1,1])
axis tight
camlight
camlight(-80,-10)
lighting gouraud
title('Triangle Normals')
```

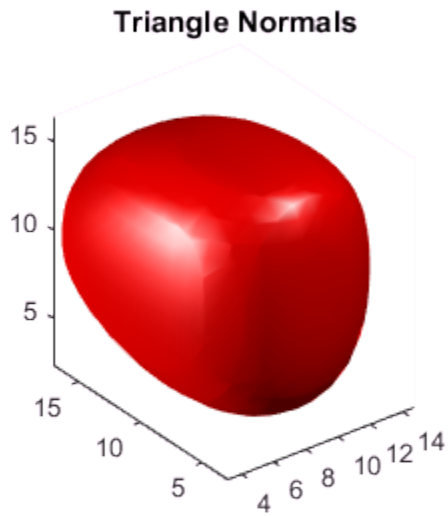

Draw the same lit isosurface using normals calculated from the volume data.

```
subplot(1,2,2)
fv = isosurface(data,.5);
p2 = patch(fv,'FaceColor','red','EdgeColor','none');
isonormals(data,p2)
view(3)
daspect([1 1 1])
axis tight
camlight
camlight(-80,-10)
lighting gouraud
title('Data Normals')
```

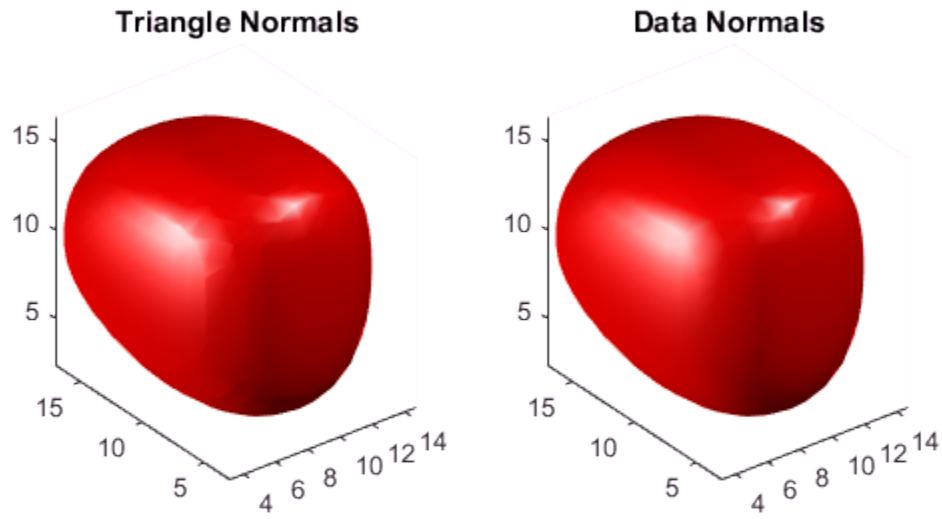

These isosurfaces illustrate the difference between triangle and data normals.

See Also

`interp3` | `isosurface` | `isocaps` | `smooth3` | `subvolume` | `reducevolume` | `reducepatch`

Introduced before R2006a

isordinal

Determine whether input is ordinal categorical array

Syntax

```
tf = isordinal(A)
```

Description

`tf = isordinal(A)` returns logical `1` (`true`) if `A` is an ordinal categorical array. Otherwise, `isordinal` returns logical `0` (`false`).

If a categorical array is ordinal, you can use relational operations for inequality comparisons, such as greater and less than, in addition to tests for equality.

Examples

Determine Whether Categorical Array Is Ordinal

Create a categorical array containing the sizes of 10 objects. Use the names `small`, `medium`, and `large` for the values `'S'`, `'M'`, and `'L'`.

```
A = categorical({'M';'L';'S';'S';'M';'L';'M';'L';'M';'S'},...
    {'S','M','L'},{'small','medium','large'})
```

```
A = 10×1 categorical array
     medium
     large
     small
     small
     medium
     large
     medium
     large
     medium
     small
```

Determine if the categories of A have a mathematical ordering.

```
isordinal(A)
```

```
ans = logical
   0
```

A is not ordinal. You must use the `'Ordinal',true` name-value pair argument in the function `categorical` to create an ordinal categorical array.

Input Arguments

A — Categorical array

vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

Tips

- To convert a categorical array, A, from nonordinal to ordinal, use `A = categorical(A,'Ordinal',true)`.
- To convert a categorical array, A, from ordinal to nonordinal, use `A = categorical(A,'Ordinal',false)`.

See Also

See Also

`categorical` | `categories`

Topics

"Ordinal Categorical Arrays"

Introduced in R2013b

isosurface

Extract isosurface data from volume data

Syntax

```
fv = isosurface(X,Y,Z,V,isovalue)
fv = isosurface(V,isovalue)
fvc = isosurface(...,colors)
fv = isosurface(...,'noshare')
fv = isosurface(...,'verbose')
[f,v] = isosurface(...)
[f,v,c] = isosurface(...)
isosurface(...)
```

Description

`fv = isosurface(X,Y,Z,V,isovalue)` computes isosurface data from the volume data `V` at the isosurface value specified in `isovalue`. That is, the isosurface connects points that have the specified value much the way contour lines connect points of equal elevation.

The arrays `X`, `Y`, and `Z` represent a Cartesian, axis-aligned grid. `V` contains the corresponding values at these grid points. The coordinate arrays (`X`, `Y`, and `Z`) must be monotonic and conform to the format produced by `meshgrid`. `V` must be a 3D volume array of the same size as `X`, `Y`, and `Z`.

The `struct` `fv` contains the faces and vertices of the isosurface, which you can pass directly to the `patch` command.

`fv = isosurface(V,isovalue)` assumes the arrays `X`, `Y`, and `Z` are defined as `[X,Y,Z] = meshgrid(1:n,1:m,1:p)` where `[m,n,p] = size(V)`.

`fvc = isosurface(...,colors)` interpolates the array `colors` onto the scalar field and returns the interpolated values in the `facevertexcdata` field of the `fvc` structure. The size of the `colors` array must be the same as `V`. The `colors` argument enables you to control the color mapping of the isosurface with data different from that

used to calculate the isosurface (e.g., temperature data superimposed on a wind current isosurface).

`fv = isosurface(...,'noshare')` does not create shared vertices. This is faster, but produces a larger set of vertices.

`fv = isosurface(...,'verbose')` prints progress messages to the command window as the computation progresses.

`[f,v] = isosurface(...)` or `[f,v,c] = isosurface(...)` returns the faces and vertices (and `faceVertexcCData`) in separate arrays instead of a struct.

`isosurface(...)` with no output arguments, creates a patch in the current axes with the computed faces and vertices. If no current axes exists, a new axes is created with a 3-D view.

Special Case Behavior — isosurface Called with No Output Arguments

If there is no current axes and you call `isosurface` with without assigning output arguments, MATLAB creates a new axes, sets it to a 3-D view, and adds lighting to the isosurface graph.

Examples

Draw Isosurface with Lighting

Load the flow data set, which represents the speed profile of a submerged jet within an infinite tank. Draw the isosurface at the data value of `-3` and prepare the isosurface for lighting by:

- Recalculating the isosurface normals based on the volume data.
- Setting the face and edge color.
- Specifying the view.
- Adding lights.

```
[x,y,z,v] = flow;
p = patch(isosurface(x,y,z,v,-3));
isonormals(x,y,z,v,p)
```

```
p.FaceColor = 'red';
p.EdgeColor = 'none';
daspect([1 1 1])
view(3);
axis tight
camlight
lighting gouraud
```

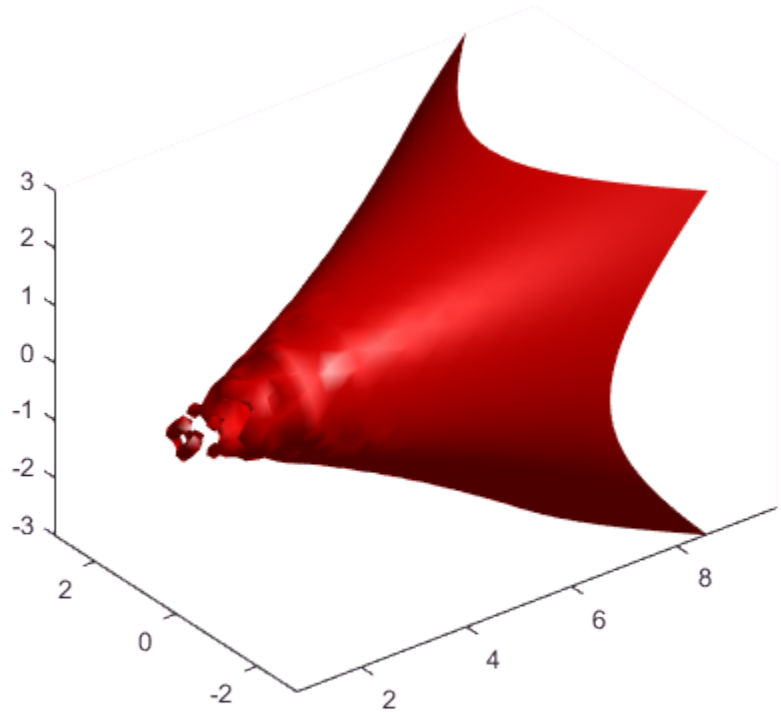

Set Isosurface Colors

Visualize the flow data, but color-code the surface to indicate magnitude along the *x*-axis. Use a sixth argument to `isosurface`, which provides a means to overlay another

data set by coloring the resulting isosurface. The `colors` variable is a vector containing a scalar value for each vertex in the isosurface, to be portrayed with the current color map. In this case, it is one of the variables that define the surface, but it could be entirely independent. You can apply a different color scheme by changing the current figure color map.

```
[x,y,z,v] = flow;
[faces,verts,colors] = isosurface(x,y,z,v,-3,x);
patch('Vertices',verts,'Faces',faces,'FaceVertexCData',colors,...
    'FaceColor','interp','EdgeColor','interp')
view(30,-15)
axis vis3d
colormap copper
```

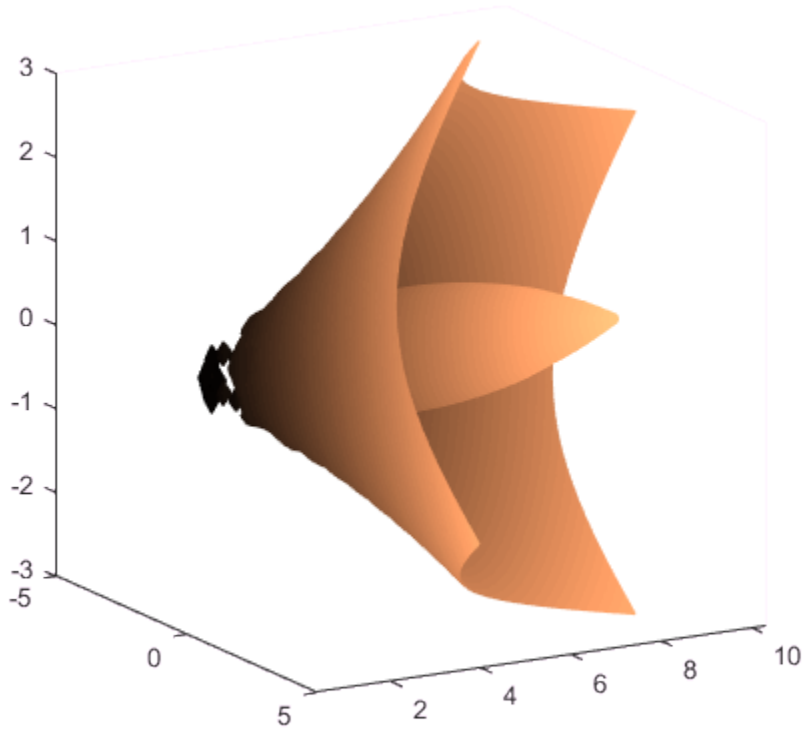

Tips

You can pass the `fv` structure created by `isosurface` directly to the `patch` command, but you cannot pass the individual faces and vertices arrays (`f`, `v`) to `patch` without specifying property names. For example,

```
patch(isosurface(X,Y,Z,V,isovalue))
```

or

```
[f,v] = isosurface(X,Y,Z,V,isovalue);
patch('Faces',f,'Vertices',v)
```

See Also

`isonormals` | `shrinkfaces` | `smooth3` | `subvolume`

Topics

"Connecting Equal Values with Isosurfaces"

Introduced before R2006a

isoutlier

Find outliers in data

Syntax

```
TF = isoutlier(A)
TF = isoutlier(A,method)
TF = isoutlier(A,movmethod,window)
TF = isoutlier( ___ ,dim)
TF = isoutlier( ___ ,Name,Value)
[TF,lower,upper,center] = isoutlier( ___ )
```

Description

`TF = isoutlier(A)` returns a logical array whose elements are `true` when an outlier is detected in the corresponding element of `A`. By default, an outlier is a value that is more than three scaled median absolute deviations (MAD) away from the median. If `A` is a matrix or table, then `isoutlier` operates on each column separately. If `A` is a multidimensional array, then `isoutlier` operates along the first dimension whose size does not equal 1.

`TF = isoutlier(A,method)` specifies a method for determining outliers. For example, `isoutlier(A,'mean')` returns `true` for all elements more than three standard deviations from the mean.

`TF = isoutlier(A,movmethod,window)` specifies a moving method for determining local outliers according to a window length defined by `window`. For example, `isoutlier(A,'movmedian',5)` returns `true` for all elements more than three local scaled MAD from the local median within a sliding window containing five elements.

`TF = isoutlier( ___ ,dim)` operates along dimension `dim` of `A` for any of the previous syntaxes. For example, `isoutlier(A,2)` operates on each row of a matrix `A`.

`TF = isoutlier( ___ ,Name,Value)` specifies additional parameters for detecting outliers using one or more name-value pair arguments. For example, `isoutlier(A,'SamplePoints',t)` detects outliers in `A` relative to the corresponding elements of a time vector `t`.

`[TF,lower,upper,center] = isoutlier( ___ )` also returns the lower and upper thresholds and the center value used by the outlier detection method.

Examples

Detect Outliers in Vector

Find the outliers in a vector of data. A logical 1 in the output indicates the location of an outlier.

```
A = [57 59 60 100 59 58 57 58 300 61 62 60 62 58 57];
TF = isoutlier(A)
```

```
TF =

  1×15 logical array

   0   0   0   1   0   0   0   0   1   0   0   0   0   0   0
```

Detect Outliers using Mean

Define outliers as points more than three standard deviations from the mean, and find the locations of outliers in a vector.

```
A = [57 59 60 100 59 58 57 58 300 61 62 60 62 58 57];
TF = isoutlier(A,'mean')
```

```
TF =

  1×15 logical array

   0   0   0   0   0   0   0   0   1   0   0   0   0   0   0
```

Detect Outliers with Sliding Window

Create a vector of data containing a local outlier.

```
x = -2*pi:0.1:2*pi;
A = sin(x);
A(47) = 0;
```

Create a time vector that corresponds to the data in A.

```
t = datetime(2017,1,1,0,0,0) + hours(0:length(x)-1);
```

Define outliers as points more than three local scaled MAD away from the local median within a sliding window. Find the locations of the outliers in A relative to the points in t with a window size of 5 hours. Plot the data and detected outliers.

```
TF = isoutlier(A,'movmedian',hours(5),'SamplePoints',t);
plot(t,A,t(TF),A(TF),'x')
legend('Data','Outlier')
```

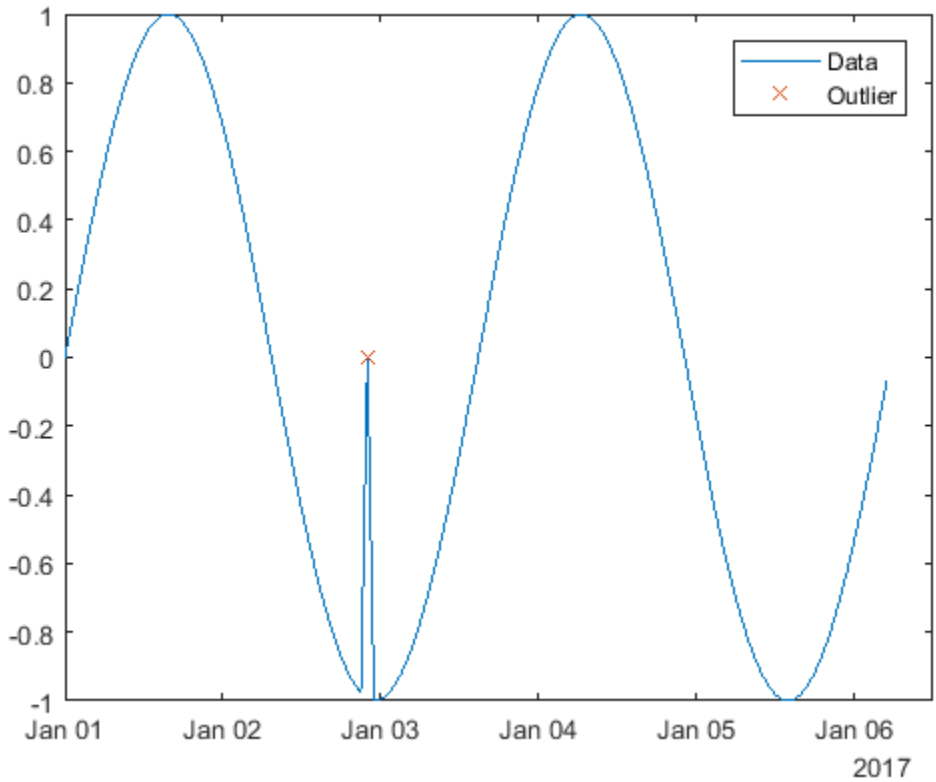

Matrix of Data

Find outliers for each row of a matrix.

Create a matrix of data containing outliers along the diagonal.

```
A = magic(5) + diag(200*ones(1,5))
```

```
A =

   217    24     1     8    15
    23   205     7    14    16
     4     6   213    20    22
    10    12    19   221     3
    11    18    25     2   209
```

Find the locations of outliers based on the data in each row.

```
TF = isoutlier(A,2)
```

```
TF =

  5×5 logical array

   1   0   0   0   0
   0   1   0   0   0
   0   0   1   0   0
   0   0   0   1   0
   0   0   0   0   1
```

Compute Outlier Thresholds

Create a vector of data containing an outlier. Find and plot the location of the outlier, and the thresholds and center value determined by the outlier method. The center value is the median of the data, and the upper and lower thresholds are three scaled MAD above and below the median.

```
x = 1:10;
A = [60 59 49 49 58 100 61 57 48 58];
[TF,lower,upper,center] = isoutlier(A);
plot(x,A,x(TF),A(TF),'x',x,lower*ones(1,10),x,upper*ones(1,10),x,center*ones(1,10))
legend('Original Data','Outlier','Lower Threshold','Upper Threshold','Center Value')
```

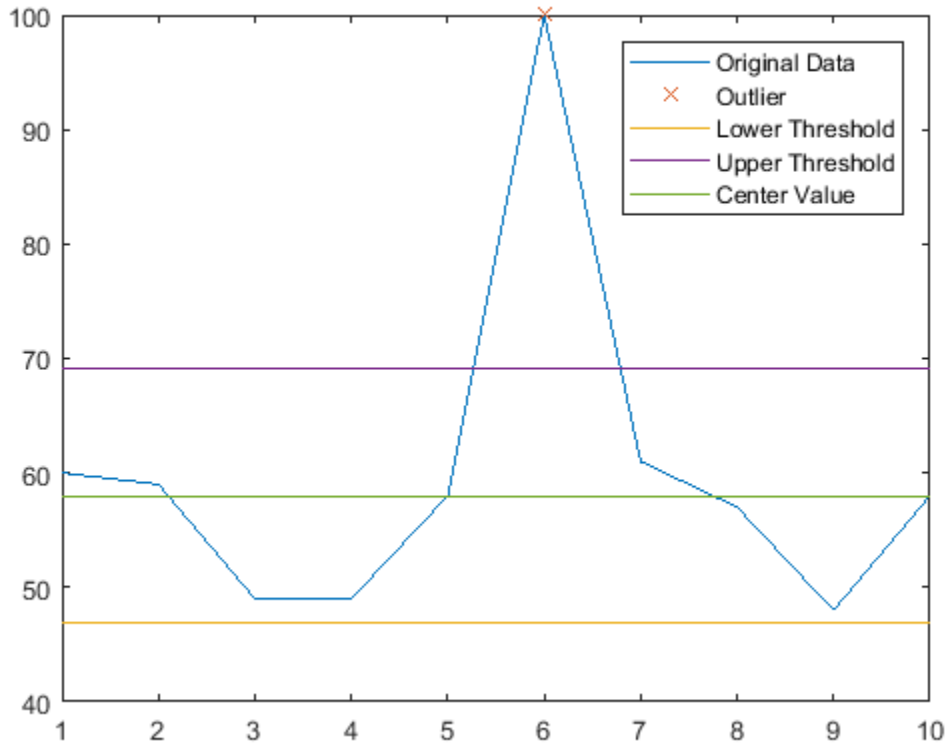

Input Arguments

A — Input data

vector | matrix | multidimensional array | table | timetable

Input data, specified as a vector, matrix, multidimensional array, table, or timetable.

If `A` is a table, then its variables must be of type `double` or `single`, or you can use the `'DataVariables'` name-value pair to list `double` or `single` variables explicitly. Specifying variables is useful when you are working with a table that contains variables with data types other than `double` or `single`.

If A is a timetable, then `isoutlier` operates only on the table elements. Row times must be unique and listed in ascending order.

Data Types: `double` | `single` | `table` | `timetable`

`method` — Method for determining outliers

`'median'` (default) | `'mean'` | `'quartiles'` | `'grubbs'` | `'gesd'`

Method for determining outliers, specified as one of the following:

Method	Description
`'median'`	Returns `true` for elements more than three scaled MAD from the median. The scaled MAD is defined as `c*median(abs(A-median(A)))` where `c=-1/(sqrt(2)*erfcinv(3/2))`.
`'mean'`	Returns `true` for elements more than three standard deviations from the mean. This method is faster but less robust than `'median'`.
`'quartiles'`	Returns `true` for elements more than 1.5 interquartile ranges above the upper quartile or below the lower quartile. This method is useful when the data in A is not normally distributed.
`'grubbs'`	Applies Grubbs's test for outliers, which iteratively removes one outlier per iteration based on hypothesis testing. This method assumes that the data in A is normally distributed.
`'gesd'`	Applies the generalized extreme Studentized deviate test for outliers. This iterative method is similar to `'grubbs'`, but can perform better when there are multiple outliers masking each other.

`movmethod` — Moving method

`'movmedian'` | `'movmean'`

Moving method for determining outliers, specified as one of the following:

Method	Description
`'movmedian'`	Returns `true` for elements more than three local scaled MAD from the local median over a window length specified by `window`.
`'movmean'`	Returns `true` for elements more than three local standard deviations from the local mean over a window length specified by `window`.

`window` — Window length

positive integer scalar | two-element vector of positive integers | positive duration scalar | two-element vector of positive durations

Window length, specified as a positive integer scalar, a two-element vector of positive integers, a positive duration scalar, or a two-element vector of positive durations.

When `window` is a positive integer scalar, then the window is centered about the current element and contains `window-1` neighboring elements. If `window` is even, then the window is centered about the current and previous elements. If `window` is a two-element vector of positive integers `[b f]`, then the window contains the current element, `b` elements backward, and `f` elements forward.

When `A` is a timetable or `'SamplePoints'` is specified as a `datetime` or `duration` vector, then `window` must be of type `duration`, and the windows are computed relative to the sample points.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a matrix `A`.

`isoutlier(A,1)` detects outliers based on the data in each column of `A`.



`isoutlier(A,2)` detects outliers based on the data in each row of `A`.



When `A` is a table or timetable, `dim` is not supported. `isoutlier` operates along each table or timetable variable separately.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `isoutlier(A,'mean','ThresholdFactor',4)`

`'ThresholdFactor'` — Detection threshold factor

nonnegative scalar

Detection threshold factor, specified as the comma-separated pair consisting of `'ThresholdFactor'` and a nonnegative scalar.

For methods `'grubbs'` and `'gesd'`, the detection threshold factor is a scalar ranging from 0 to 1. Values close to 0 result in a smaller number of outliers and values close to 1 result in a larger number of outliers. The default detection threshold factor is 0.5.

For methods `'movmedian'` and `'movmean'`, the detection threshold factor replaces the number of scaled MAD or standard deviations from the mean, which is 3 by default.

For the `'quartile'` method, the detection threshold factor replaces the number of interquartile ranges, which is 1.5 by default.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'SamplePoints'` — Sample points

vector

Sample points, specified as the comma-separated pair consisting of `'SamplePoints'` and a vector. The sample points represent the location of the data in `A`. Sample points do not need to be uniformly sampled. By default, the sample points vector is `[1 2 3 ...]`.

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if `t` is a vector of times corresponding to the input data, then `isoutlier(rand(1,10),'movmean',3,‘SamplePoints’,t)` has a window that represents the time interval between `t(i)-1.5` and `t(i)+1.5`.

When the sample points vector has data type `datetime` or `duration`, then the moving window length must have type `duration`.

Data Types: `double` | `single` | `datetime` | `duration`

`'DataVariables'` — Table variables

variable name | cell array of variable names | numeric vector | logical vector | function handle

Table variables, specified as the comma-separated pair consisting of `'DataVariables'` and a variable name, a cell array of variable names, a numeric vector, a logical vector, or a function handle. The `'DataVariables'` value indicates which columns of the input table to detect outliers in, and can be one of the following:

- A character vector specifying a single table variable name
- A cell array of character vectors where each element is a table variable name

- A vector of table variable indices
- A logical vector whose elements each correspond to a table variable, where `true` includes the corresponding variable and `false` excludes it
- A function handle that takes the table as input and returns a logical scalar

The data type associated with the indicated variable must be `double` or `single`.

Example: `'Age'`

Example: `{'Height','Weight'}`

Example: `@isnumeric`

Data Types: `char` | `cell` | `double` | `single` | `logical` | `function_handle`

`'MaxNumOutliers'` — Maximum outlier threshold
positive integer

Maximum outlier threshold, for the `'gesd'` method only, specified as the comma-separated pair consisting of `'MaxNumOutliers'` and a positive integer. The `'MaxNumOutliers'` value specifies the maximum number of outliers returned by the `'gesd'` method. For example, `isoutlier(A,'gesd','MaxNumOutliers',5)` returns no more than five outliers.

The default value for `'MaxNumOutliers'` is the integer nearest to 10 percent of the number of elements in `A`. Setting a larger value for the maximum number of outliers can ensure that all outliers are detected, but at the cost of reduced computational efficiency.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`TF` — Outlier indicator
vector | matrix | multidimensional array

Outlier indicator, returned as a vector, matrix, or multidimensional array. An element of `TF` is `true` when the corresponding element of `A` is an outlier and `false` otherwise. `TF` is the same size as `A`.

Data Types: `logical`

`lower` — Lower threshold
scalar | vector | matrix | multidimensional array

Lower threshold used by the outlier detection method, returned as a scalar, vector, matrix, or multidimensional array. For example, the lower value of the default outlier detection method is three MAD below the median of the input data. `lower` has the same size as `A` in all dimensions except for the operating dimension where the length is 1.

Data Types: `double` | `single`

`upper` — Upper threshold
scalar | vector | matrix | multidimensional array

Upper threshold used by the outlier detection method, returned as a scalar, vector, matrix, or multidimensional array. For example, the upper value of the default outlier detection method is three MAD above the median of the input data. `upper` has the same size as `A` in all dimensions except for the operating dimension where the length is 1.

Data Types: `double` | `single`

`center` — Center value
scalar | vector | matrix | multidimensional array

Center value used by the outlier detection method, returned as a scalar, vector, matrix, or multidimensional array. For example, the center value of the default outlier detection method is the median of the input data. `center` has the same size as `A` in all dimensions except for the operating dimension where the length is 1.

Data Types: `double` | `single`

Definitions

Median Absolute Deviation

For a random variable vector A made up of N scalar observations, the median absolute deviation (MAD) is defined as

$$\mathrm{MAD} = \mathrm{median}\left(\left| A_i - \mathrm{median}(A) \right|\right)$$

for $i = 1,2,\ldots,N$.

See Also

See Also

`fillmissing` | `filloutliers` | `ismissing` | `rmmissing`

Introduced in R2017a

ispc

Determine if version is for Windows (PC) platform

Syntax

```
tf = ispc
```

Description

`tf = ispc` returns logical `1` (`true`) if the version of MATLAB software is for the Microsoft Windows platform. Otherwise, it returns logical `0` (`false`).

Examples

Execute MATLAB Command Based on Platform

```
if ismac
    % Code to run on Mac plaform
elseif isunix
    % Code to run on Linux plaform
elseif ispc
    % Code to run on Windows platform
else
    disp('Platform not supported')
end
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Returns true or false based on the MATLAB version you use for code generation.
- Use only when the code generation target is S-function (Simulation) or MEX-function.

See Also

See Also

`computer` | `is*` | `ismac` | `isstudent` | `isunix`

Introduced before R2006a

ispref

Test for existence of preference

Syntax

```
ispref('group','pref')
ispref('group')
ispref('group',{'pref1','pref2',...'prefn'})
```

Description

`ispref('group','pref')` returns `1` if the preference specified by `group` and `pref` exists, and `0` otherwise.

`ispref('group')` returns `1` if the GROUP exists, and `0` otherwise.

`ispref('group',{'pref1','pref2',...'prefn'})` returns a logical array the same length as the cell array of preference names, containing `1` where each preference exists, and `0` elsewhere.

Examples

```
addpref('mytoolbox','version','1.0')
ispref('mytoolbox','version')

ans =
     1.0
```

See Also

`addpref` | `rmpref` | `getpref` | `setpref` | `uigetpref` | `uisetpref`

Introduced before R2006a

isprime

Determine which array elements are prime

Syntax

```
TF = isprime(X)
```

Description

`TF = isprime(X)` returns a logical array the same size as `X`. The value at `TF(i)` is `true` when `X(i)` is a prime number. Otherwise, the value is `false`.

Examples

Determine if Double Integer Values Are Prime

```
tf = isprime([2 3 0 6 10])
```

```
tf = 1×5 logical array
   1   1   0   0   0
```

2 and 3 are prime, but 0, 6, and 10 are not.

Determine if Unsigned Integer Values Are Prime

```
x = uint16([333 71 99]);
tf = isprime(x)
```

```
tf = 1×3 logical array
   0   1   0
```

71 is prime, but 333 and 99 are not.

Input Arguments

X — Input values
scalar, vector, or array of real, nonnegative integer values

Input values, specified as a scalar, vector, or array of real, nonnegative integer values.

Example: `17`

Example: `[1 2 3 4]`

Example: `int16([127 255 4095])`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The maximum double precision input is `2^33`.
- The maximum single precision input is `2^25`.
- The input `X` cannot have type `int64` or `uint64`.

See Also

See Also
`is*` | `primes`

Introduced before R2006a

isprop

Determine if property of object

Syntax

```
tf = isprop(obj,'PropertyName')
```

Description

`tf = isprop(obj,'PropertyName')` returns `true` if the specified `PropertyName` is a property of object `obj`. Otherwise, `isprop` returns logical `false`.

If `obj` is an array, `isprop` returns a logical array the same size as `obj`. Each true element of `tf` corresponds to an element of `obj` that has the property, `PropertyName`.

Note: If `obj` is an empty object or an array of empty objects, `isprop` returns an empty logical array, even if `PropertyName` is a property of `obj`.

While `isprop` returns `true` if the class of an object defines a property of that name, classes can control access to property values by defining property attributes. Property access can be defined as:

- Readable and writable
- Read only
- Write only
- Accessible only to certain class methods

Therefore, `isprop` might indicate that a property exists, but you might not be able to access that property. For more information, see “Get Information About Properties”.

Examples

This example uses `isprop` to determine if `XDataSource` is a property of object `h` before attempting to set the property value:

```
h = plot(1:10);
if isprop(h,'XDataSource')
   set(h,'XDataSource','x')
else
   error(['XDataSource not a property of class ',class(h)])
end
```

Since `XDataSource` is a property of `h`, its value is set to `'x'`.

Tutorials

- "Properties"

See Also

`properties` | `ismethod`

Topics

"Properties"

Introduced before R2006a

isprop (COM)

Determine whether input is COM object property

Syntax

```
tf = isprop(h,'propertyname')
```

Description

`tf = isprop(h,'propertyname')` returns logical `1` (`true`) if the specified `name` is a property of COM object `h`. Otherwise, returns logical `0` (`false`).

COM functions are available on Microsoft Windows systems only.

Examples

Test a property of an instance of a Microsoft Excel application.

```
h = actxserver('Excel.Application');
isprop(h,'UsableWidth')
```

MATLAB returns `true`, `UsableWidth` is a property.

Try the same test on `SaveWorkspace`.

```
isprop(h,'SaveWorkspace')
```

MATLAB returns `false`. `SaveWorkspace` is not a property; it is a method.

See Also

`inspect` | `ismethod` | `isevent`

Topics

"Exploring Properties"

isprotected

Determine whether categories of categorical array are protected

Syntax

```
tf = isprotected(A)
```

Description

`tf = isprotected(A)` returns logical `1` (`true`) if the categories of `A` are protected. Otherwise, `isprotected` returns logical `0` (`false`).

- `true` — When you assign new values to `B`, the values must belong to one of the existing categories. Therefore, you only can combine arrays that have the same categories. To add new categories to `B`, you must use the `addcats` function.
- `false` — When you assign new values to `B`, the categories update automatically. Therefore, you can combine (nonordinal) categorical arrays that have different categories. The categories can update to include the categories from both arrays.

Examples

Determine Whether Categories Are Protected

Create a categorical array containing the sizes of 10 objects. Use the names `small`, `medium`, and `large` for the values `'S'`, `'M'`, and `'L'`.

```
valueset = {'S','M','L'};
catnames = {'small','medium','large'};

A = categorical({'M';'L';'S';'S';'M';'L';'M';'L';'M';'S'},...
    valueset,catnames,'Ordinal',true)
```

```
A = 10×1 categorical array
     medium
     large
     small
```

```
     small
     medium
     large
     medium
     large
     medium
     small
```

A is a 10-by-1 categorical array.

Display the categories of A.

```
categories(A)
```

```
ans = 3×1 cell array
    'small'
    'medium'
    'large'
```

Determine whether the categories of A are protected.

```
tf = isprotected(A)
```

```
tf = logical
   1
```

Since A is an ordinal categorical array, the categories are protected. If you try to add a new value that does not belong to one of the existing categories, for example `A(11) = 'xlarge'`, then an error is returned.

First, use `addcats` to add a new category for `xlarge`.

```
A = addcats(A,'xlarge','After','large');
```

Since A is protected, you can now add a value for `xlarge` since it has an existing category.

```
A(11) = 'xlarge'
```

```
A = 11×1 categorical array
     medium
     large
```

```
small
small
medium
large
medium
large
medium
small
xlarge
```

A is now a 11-by-1 categorical array with four categories, such that `small < medium < large < xlarge`.

- "Work with Protected Categorical Arrays"

Input Arguments

A — Categorical array

vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

The categories of ordinal categorical arrays are always protected.

See Also

See Also

`categorical` | `categories`

Topics

"Work with Protected Categorical Arrays"

Introduced in R2013b

isreal

Determine whether array is real

Syntax

```
tf = isreal(A)
```

Description

`tf = isreal(A)` returns logical `1` (`true`) when `A` does not have an imaginary part. Otherwise, it returns logical `0` (`false`).

If `A` has a stored imaginary part with value `0`, then `isreal(A)` returns logical `0` (`false`).

Examples

Determine Whether Matrix Contains All Real Values

Define a 3-by-4 matrix, `A`.

```
A = [7 3+4i 2 5i;...
     2i 1+3i 12 345;...
     52 108 78 3];
```

Determine whether the array is real.

```
tf = isreal(A)
```

```
tf = logical
   0
```

Since `A` contains complex elements, `isreal` returns false.

Define Complex Number with Zero-Valued Imaginary Part

Use the `complex` function to create a scalar, `A`, with zero-valued imaginary part.

```
A = complex(12)
```

```
A =
  12.0000 + 0.0000i
```

Determine whether A is real.

```
tf = isreal(A)
```

```
tf = logical
   0
```

A is not real because it has an imaginary part, even though the value of the imaginary part is 0.

Determine whether A contains any elements with zero-valued imaginary part.

```
~any(imag(A))
```

```
ans = logical
   1
```

A contains elements with zero-valued imaginary part.

Computation Resulting in Zero-Valued Imaginary Part

Define two complex scalars, x and y.

```
x=3+4i;
y=5-4i;
```

Determine whether the addition of two complex scalars, x and y, is real.

```
A = x+y
```

```
A = 8
```

MATLAB® drops the zero imaginary part.

```
isreal(A)
```

```
ans = logical
   1
```

A is real since it does not have an imaginary part.

Find Real Elements in Cell Array

Create a cell array.

```
C{1,1} = pi;                    % double
C{2,1} = 'John Doe';            % char array
C{3,1} = 2 + 4i;                % complex double
C{4,1} = ispc;                  % logical
C{5,1} = magic(3);              % double array
C{6,1} = complex(5,0)           % complex double
```

```
C = 6×1 cell array
    [          3.1416]
    'John Doe'
    [2.0000 + 4.0000i]
    [               1]
    [3×3 double]
    [5.0000 + 0.0000i]
```

C is a 1-by-6 cell array.

Loop over the elements of a cell array to distinguish between real and complex elements.

```
for k = 1:6
x(k,1) = isreal(C{k,1});
end
```

```
x
```

```
x = 6×1 logical array
   1
   1
   0
   1
   1
   0
```

All but C{3,1} and C{6,1} are real arrays.

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

- For numeric data types, if A does not have an imaginary part, `isreal` returns `true`; if A does have an imaginary part `isreal` returns `false`.
- For `logical` and `char` data types, `isreal` always returns `true`.
- For `table`, `cell`, `struct`, `datetime`, `function_handle`, and `object` data types, `isreal` always returns `false`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `struct` | `table` | `cell` | `datetime` | `function_handle`
Complex Number Support: Yes

Tips

- `isreal(complex(A))` always returns `false`, even when the imaginary part is all zeros.
- `~isreal(x)` detects arrays that have an imaginary part, even if it is all zeros.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`complex` | `isa` | `isfinite` | `isinf` | `isnan` | `isnumeric` | `isprime`

Topics

"Complex Numbers"

Introduced before R2006a

isregular

Determine whether times in timetable are regular

Syntax

```
TF = isregular(TT)
TF = isregular(TT,unit)
[TF,dt] = isregular( ___ )
```

Description

`TF = isregular(TT)` returns `1` (`true`) if the row times in the timetable `TT` are regular. Otherwise, it returns `0` (`false`). The row times are regular if they increase or decrease monotonically by a fixed time step. For example, if consecutive row times always differ by one second, then the times are regular.

`TF = isregular(TT,unit)` returns `1` (`true`) if the row times are regular with respect to the calendar duration unit specified by `unit`. For example, if the row times are datetime values whose year and month components are regular to the month, and `unit` is `'month'`, then `isregular` returns `1`.

`[TF,dt] = isregular( ___ )` also returns `dt`, the fixed time step between row times. If `TT` is regular, then `dt` is either a duration or a calendar duration. If `TT` is not regular, then `dt` is a `NaN` value.

Examples

Determine if Timetable is Regular

Create a timetable using a monthly time vector. Determine whether it is regular with respect to time, and then with respect to months.

Create a timetable whose row times are the first five months of the year `2016`. Add the monthly price of a stock as a table variable.

```
StockPrice = [109.0;107.82;113.17;128.01;116];
M = timetable(datetime(2016,1:5,3)',StockPrice)
```

```
M = 5×1 timetable
        Time       StockPrice
    ___________    __________

    03-Jan-2016       109
    03-Feb-2016    107.82
    03-Mar-2016    113.17
    03-Apr-2016    128.01
    03-May-2016       116
```

Determine whether M is a regular timetable.

```
TF = isregular(M)
```

```
TF = logical
   0
```

M is not regular because the first five months have different numbers of days. You can use the `diff` function to calculate the differences in the time steps between consecutive times in M. The differences are durations, formatted to display the time steps as hours, minutes, and seconds.

```
D = diff(M.Time)
```

```
D = 4×1 duration array
   744:00:00
   696:00:00
   744:00:00
   720:00:00
```

Determine whether M is regular with respect to months, by specifying `'month'` as the unit of measure.

```
TF = isregular(M,'months')
```

```
TF = logical
   1
```

Determine Time Step of Row Times

Create a timetable. Determine if it is regular, and return the size of the time step if it is.

```
Time = [minutes(0):minutes(15):minutes(60)]';
Pulse = [72 75 80 73 69]';
TT = timetable(Time,Pulse)
```

```
TT = 5×1 timetable
     Time     Pulse
    ______    _____

     0 min    72
    15 min    75
    30 min    80
    45 min    73
    60 min    69
```

```
[TF,dt] = isregular(TT)
```

```
TF = logical
   1


dt = duration
   15 min
```

TT is a regular timetable.

- "Create Timetables"
- "Clean Timetable with Missing, Duplicate, or Nonuniform Times"
- "Select Timetable Data by Row Time and Variable Type"
- "Access Data in a Table"

Input Arguments

TT — Input timetable
timetable

Input timetable.

`unit` — Calendar duration unit

character vector

Calendar duration unit, specified as a character vector. `isregular` determines if the row times of `TT` are regular to the calendar unit specified by `unit`. The table lists the calendar duration units you can specify.

Time Unit	Description
`'years'`	Regular to the year
`'quarters'`	Regular to the quarter
`'months'`	Regular to the month
`'weeks'`	Regular to the week
`'days'`	Regular to the day
`'time'` (default)	Regular with respect to time

Output Arguments

`TF` — Regularity of row times

`1` | `0`

Regularity of row times, returned as a logical `1` if the row times are regular, and a logical `0` if they are not.

`dt` — Time step between row times

duration | calendar duration

Time step between row times, returned as a duration or a calendar duration. If the timetable is not regular, then `dt` is a `NaN` value.

See Also

See Also

`caldiff` | `calendarDuration` | `datetime` | `diff` | `duration` | `issorted` | `retime` | `sortrows` | `split` | `synchronize`

Topics

"Create Timetables"
"Clean Timetable with Missing, Duplicate, or Nonuniform Times"
"Select Timetable Data by Row Time and Variable Type"
"Access Data in a Table"
"Tables"
"Represent Dates and Times in MATLAB"

Introduced in R2016b

isrow

Determine whether input is row vector

Syntax

```
isrow(V)
```

Description

`isrow(V)` returns logical 1 (`true`) if `size(V)` returns `[1 n]` with a nonnegative integer value `n`, and logical 0 (`false`) otherwise.

Examples

Determine Row Vector

Determine if a vector is a row or not.

```
V = rand(5,1);
isrow(V)
```

```
ans = logical
   0
```

```
Vt = V';
isrow(Vt)
```

```
ans = logical
   1
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`iscolumn` | `ismatrix` | `isscalar` | `isvector`

Introduced in R2010b

isscalar

Determine whether input is scalar

Syntax

```
isscalar(A)
```

Description

`isscalar(A)` returns logical `1` (`true`) if `size(A)` returns [1 1], and logical `0` (`false`) otherwise.

Examples

Determine Scalar

```
A = [1 2; 3 4];
isscalar(A)
```

```
ans = logical
   0
```

```
B = A(1,1);
isscalar(B)
```

```
ans = logical
   1
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`isvector` | `ismatrix` | `isrow` | `iscolumn` | `islogical` | `ischar` | `isa` | `is*`

Introduced before R2006a

issorted

Determine if array is sorted

Syntax

```
TF = issorted(A)
TF = issorted(A,dim)
TF = issorted( ___ ,direction)
TF = issorted( ___ ,Name,Value)

TF = issorted(A,'rows')
```

Description

`TF = issorted(A)` returns the logical scalar 1 (`true`) when the elements of `A` are listed in ascending order and 0 (`false`) otherwise.

- If `A` is a vector, then `issorted` returns 1 when the vector elements are in ascending order.
- If `A` is a matrix, then `issorted` returns 1 when each column of `A` is in ascending order.
- If `A` is a multidimensional array, then `issorted` returns 1 when `A` is in ascending order along the first dimension whose size does not equal 1.
- If `A` is a timetable, then `issorted` returns 1 when its row time vector is in ascending order. To check the ordering of row times or variables of a timetable with additional options, use the `issortedrows` function.

`TF = issorted(A,dim)` returns 1 when `A` is sorted along dimension `dim`. For example, if `A` is a matrix, then `issorted(A,2)` returns 1 when each row of `A` is in ascending order.

`TF = issorted( ___ ,direction)` returns 1 when `A` is sorted in the order specified by `direction` for any of the previous syntaxes. For example, `issorted(A,'monotonic')` returns 1 if the elements of `A` are ascending or descending.

`TF = issorted( ___ ,Name,Value)` specifies additional parameters for checking sort order. For example, `issorted(A,'ComparisonMethod','abs')` checks if `A` is sorted by magnitude.

`TF = issorted(A,'rows')` returns 1 when the elements of the first column of a matrix are sorted. If the first column contains repeated elements, then `issorted` looks at the ordering of the second column to determine `TF`. In general, `issorted` looks to the column immediately to the right to determine `TF` when the current and previous columns have repeated elements.

- If `A` is a timetable, then `issortedrows` checks if the row time vector is in ascending order.
- This syntax is not supported for a matrix of character vectors.

Note: This syntax is not recommended. Use `issortedrows` instead.

Examples

Sorted Vector

Create a vector and check if it is sorted in ascending order.

```
A = [5 12 33 39 78 90 95 107];
issorted(A)
```

```
ans = logical
   1
```

Sorted Matrix Rows

Create a 5-by-5 matrix and check if each row is sorted in descending order.

```
A = magic(5)
```

```
A =

    17    24     1     8    15
    23     5     7    14    16
```

```
     4     6    13    20    22
    10    12    19    21     3
    11    18    25     2     9
```

```
issorted(A,2,'descend')
```

```
ans = logical
   0
```

Sort each row of A in descending order using the `sort` function, and check that the result has descending rows.

```
B = sort(A,2,'descend')
```

```
B =

    24    17    15     8     1
    23    16    14     7     5
    22    20    13     6     4
    21    19    12    10     3
    25    18    11     9     2
```

```
issorted(B,2,'descend')
```

```
ans = logical
   1
```

2-D Array of Strings

Create a 2-D array of strings and determine if each column is sorted.

```
str = string({'Horse','Chicken';'cow','Goat'})
```

```
str = 2×2 string array
    "Horse"    "Chicken"
    "cow"      "Goat"
```

```
issorted(str)
```

```
ans = logical
```

```
   1
```

Determine if the rows are sorted from left to right.

```
issorted(str,2)
```

```
ans = logical
   0
```

Determine if each row is sorted in descending order from left to right.

```
issorted(str,2,'descend')
```

```
ans = logical
   1
```

Complex Vector with NaN

Create a vector containing complex numbers and NaN values.

```
A = [NaN NaN 1+i 1+2i 2+2i 3+i];
```

Check that the NaN elements are placed first within the vector, and that the remaining elements are sorted by real part.

```
issorted(A,'MissingPlacement','first','ComparisonMethod','real')
```

```
ans = logical
   1
```

Since the third and fourth elements of A have equal real part, `issorted` checks if the imaginary part of these elements are also sorted.

```
imag(A(3))
```

```
ans = 1
```

```
imag(A(4))
```

```
ans = 2
```

Input Arguments

A — Input array

vector | matrix | multidimensional array | cell array of character vectors | timetable

Input array, specified as a vector, matrix, multidimensional array, cell array of character vectors, or timetable.

- If A contains missing values, such as NaN, NaT, <undefined>, and missing, then by default, issorted requires that they are placed at the end to return 1.
- If A is complex, then by default, issorted determines sort order by the magnitude of the elements. If there are consecutive elements with equal magnitude, then issorted also checks the phase angle in the interval (-π, π] to break ties.
- If A is a cell array of character vectors or a string array, then issorted determines sort order using the code order for the UTF-16 character encoding scheme. The sort is case-sensitive. For more information on sorted character and string arrays, see "Sort Order for Character and String Arrays" on page 1-6101.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string | cell | categorical | datetime | duration | timetable
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a matrix A. issorted(A,1) checks if the data in each column of A is sorted.



`issorted(A,2)` checks if the data in each row of `A` is sorted.



`dim` is not supported for timetable input.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`direction` — Sorting direction
`'ascend'` (default) | `'descend'` | `'monotonic'` | `'strictascend'` | `'strictdescend'` | `'strictmonotonic'`

Sorting direction, specified as one of the following:

- `'ascend'` — Checks if data is in ascending order. Data can contain consecutive repeated elements.
- `'descend'` — Checks if data is in descending order. Data can contain consecutive repeated elements.
- `'monotonic'` — Checks if data is in descending or ascending order. Data can contain consecutive repeated elements.
- `'strictascend'` — Checks if data is in strictly ascending order. Elements must be unique.
- `'strictdescend'` — Checks if data is in strictly descending order. Elements must be unique.
- `'strictmonotonic'` — Checks if data is in strictly descending or strictly ascending order. Elements must be unique.

`direction` is not supported for timetable input. Use `issortedrows` instead.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `issorted(A,'MissingPlacement','last')`

`'MissingPlacement'` — Placement of missing values
`'auto'` (default) | `'first'` | `'last'`

Placement of missing values (`NaN`, `NaT`, `<undefined>`, and `missing`) specified as the comma-separated pair consisting of `'MissingPlacement'` and one of the following:

- `'auto'` — Missing elements are required to be placed last for ascending order and first for descending order to return 1.
- `'first'` — Missing elements are required to be placed first to return 1.
- `'last'` — Missing elements are required to be placed last to return 1.

This name-value pair is not supported for timetable input. Use `issortedrows` instead.

`'ComparisonMethod'` — Element comparison method
`'auto'` (default) | `'real'` | `'abs'`

Element comparison method, specified as the comma-separated pair consisting of `'ComparisonMethod'` and one of the following:

- `'auto'` — Check if `A` is sorted by `real(A)` when `A` is real, and check if `A` is sorted by `abs(A)` when `A` is complex.
- `'real'` — Check if `A` is sorted by `real(A)` when `A` is real or complex. If `A` has elements with consecutive equal real parts, then check `imag(A)` to break ties.
- `'abs'` — Check if `A` is sorted by `abs(A)` when `A` is real or complex. If `A` has elements with consecutive equal magnitude, then check `angle(A)` in the interval (-π,π] to break ties.

Definitions

Sort Order for Character and String Arrays

MATLAB stores characters as Unicode using the UTF-16 character encoding scheme. Character and string arrays are sorted according to the UTF-16 code point order. For the

characters that are also the ASCII characters, this order means that uppercase letters come before lowercase letters. Digits and some punctuation also come before letters.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays for the first argument.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).
- See “Code Generation for Complex Data with Zero-Valued Imaginary Parts” (MATLAB Coder).

See Also

See Also

`issortedrows` | `sort` | `sortrows`

Introduced before R2006a

issortedrows

Determine if matrix or table rows are sorted

Syntax

```
TF = issortedrows(A)
TF = issortedrows(A,column)
TF = issortedrows( ___ ,direction)
TF = issortedrows( ___ ,Name,Value)

TF = issortedrows(tblA)

TF = issortedrows(tblA,'RowNames')
TF = issortedrows(tblA,rowDimName)
TF = issortedrows(tblA,vars)
TF = issortedrows( ___ ,direction)
TF = issortedrows( ___ ,Name,Value)
```

Description

`TF = issortedrows(A)` returns the logical scalar 1 (`true`) when the elements of the first column of a matrix `A` are listed in ascending order. Otherwise, `issortedrows` returns 0 (`false`). When the first column has consecutive repeated elements, `issortedrows` determines whether the next column is in ascending order, and repeats this behavior for succeeding equal values.

`TF = issortedrows(A,column)` returns 1 when `A` is sorted based on the columns specified in the vector `column`. For example, `issortedrows(A,[4 6])` first checks if the fourth column of `A` is in ascending order, then checks if the sixth column is in ascending order to break ties.

`TF = issortedrows( ___ ,direction)` returns 1 when the first column of `A` is in the order specified by `direction` for any of the previous syntaxes. For example, `issortedrows(A,'monotonic')` checks if the first column of `A` is in ascending or descending order. `direction` can also be a cell array of character vectors representing multiple directions for each column being checked. For example, `issortedrows(A,[2`

`3],{'ascend' 'descend'})` checks if the second column of `A` is in ascending order, then checks if the third column is in descending order to break ties.

`TF = issortedrows( ___ ,Name,Value)` specifies additional parameters for checking sort order. For example, `issortedrows(A,'ComparisonMethod','abs')` checks if the elements in the first column of `A` are sorted by magnitude.

`TF = issortedrows(tblA)` checks if the rows of a table are in ascending order based on the elements in the first variable. If elements in the first variable are repeated, then `issortedrows` checks the elements in the second variable, and so on.

If `tblA` is a timetable, then `issortedrows` checks if the rows of `tblA` are in ascending order based on its row times. Row times of a timetable label the rows along the first dimension of the timetable.

`TF = issortedrows(tblA,'RowNames')` checks if the rows of a table are in ascending order based on its row names. Row names of a table label the rows along the first dimension of the table.

This syntax is not supported when `tblA` is a timetable.

`TF = issortedrows(tblA,rowDimName)` checks if the rows of a table are sorted by row labels `rowDimName` along the first dimension.

- If `tblA` is a table, then the labels are row names.
- If `tblA` is a timetable, then the labels are row times.

`TF = issortedrows(tblA,vars)` checks if the rows of a table are in ascending order based on the elements in variables `vars`. For example, if `Age` and `Weight` are variables of `tblA`, then `issortedrows(tblA,{'Age','Weight'})` checks if the rows are in ascending order by age, then by weight to break ties.

- If `tblA` is a table with row names, then `vars` can include the row names.
- If `tblA` is a timetable, then `vars` can include the row times.

`TF = issortedrows( ___ ,direction)` checks if a table is sorted in the order specified by `direction` for any of the previous table syntaxes. `direction` can be a single sort order such as `'descend'` or `'monotonic'`, which is applied to each specified variable, row name, or row time. `direction` can also be a cell array whose elements contain different sort orders for each specified variable, row name, or row time that `issortedrows` operates on.

`TF = issortedrows( ___ ,Name,Value)` specifies additional parameters for sorting tables. For example, `issortedrows(tblA,'Var1','MissingPlacement','first')` checks that missing elements in `Var1`, such as `NaN` or `NaT`, are placed at the beginning of the table.

Examples

Matrix Rows

Create a matrix and determine if its rows are in ascending order based on the values in the first column. Since the first column has a repeated element, `sortrows` looks to the second column to determine whether the matrix rows are sorted.

```
A = [1 2 9; 1 5 8; 4 0 7]
```

```
A =

     1     2     9
     1     5     8
     4     0     7
```

```
TF = issortedrows(A)
```

```
TF = logical
   1
```

Determine if the rows of `A` are in ascending order based on the values in the third column.

```
TF = issortedrows(A,3)
```

```
TF = logical
   0
```

Determine if the rows of `A` are in descending order based on the values in the third column.

```
TF = issortedrows(A,3,'descend')
```

```
TF = logical
   1
```

Complex Matrix

Create a matrix containing complex numbers, and determine if its rows are in ascending order based on the real parts of the elements in the first column. Since the elements in the first column have equal real parts, `issortedrows` then checks the imaginary parts to break the tie.

```
A = [1+i 2i; 1+2i 3+4i]
```

```
A =
   1.0000 + 1.0000i   0.0000 + 2.0000i
   1.0000 + 2.0000i   3.0000 + 4.0000i
```

```
TF = issortedrows(A,'ComparisonMethod','real')
```

```
TF = logical
   1
```

Table Rows

For a table that describes patient information for five people, determine how the rows of the table are sorted.

Create a table with four variables, and determine if the rows of the table are in ascending order based on age. Since the age variable contains a repeated element, `issortedrows` then checks the next column (`Height`) to break the tie.

```
LastName = {'Sweet';'Jacobson';'Wang';'Joiner';'Berger'};
Age = [38;38;40;43;49];
Height = [69;71;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];

tblA = table(Age,Height,Weight,BloodPressure,'RowNames',LastName)
```

```
tblA = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Sweet       38     69        176       124      93
```

```
    Jacobson     38      71         163        109      77
    Wang         40      64         131        125      83
    Joiner       43      67         133        117      75
    Berger       49      64         119        122      80
```

```
TF = issortedrows(tblA)
```

```
TF = logical
   1
```

Check if the table rows are sorted by last name, which are the row names for `tblA`.

```
TF = issortedrows(tblA,'RowNames')
```

```
TF = logical
   0
```

Check if the table rows are in ascending order by age, then in descending order by weight.

```
TF = issortedrows(tblA,{'Age','Weight'},{'ascend','descend'})
```

```
TF = logical
   1
```

Timetable with Missing Times

Create a timetable, and check that the rows of the timetable are in ascending order based on the row times. Also check that missing elements are placed last.

```
Time = [seconds(1:3) NaN NaN]';
TT = timetable(Time,[98;97.5;97.9;98.1;99.9],[120;111;119;117;112],...
               'VariableNames',{'Temperature','Distance'})
```

```
TT = 5×2 timetable
      Time     Temperature    Distance
    _______    ___________    ________

      1 sec       98           120
      2 sec     97.5           111
```

```
      3 sec    97.9           119
    NaN sec    98.1           117
    NaN sec    99.9           112
```

```
TF = issortedrows(TT,'Time','MissingPlacement','last')
```

```
TF = logical
   1
```

Input Arguments

A — Input array

column vector | matrix

Input array, specified as a column vector or matrix.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

`column` — Column sorting vector

nonzero integer scalar | vector of nonzero integers

Column sorting vector, specified as a nonzero integer scalar or a vector of nonzero integers. Each specified integer value indicates a column to check for sort order. Negative integers indicate that the sort order is descending.

`direction` — Sorting direction

character vector | cell array of character vectors

Sorting direction, specified as one of the following:

- `'ascend'` (default) — Checks if data is in ascending order. Data can contain consecutive repeated elements.
- `'descend'` — Checks if data is in descending order. Data can contain consecutive repeated elements.
- `'monotonic'` — Checks if data is in descending or ascending order. Data can contain consecutive repeated elements.

- `'strictascend'` — Checks if data is in strictly ascending order. Elements must be unique.
- `'strictdescend'` — Checks if data is in strictly descending order. Elements must be unique.
- `'strictmonotonic'` — Checks if data is in strictly descending or strictly ascending order. Elements must be unique.

`direction` can also be a cell array containing a list of these character vectors, where each element in the list corresponds to a column of `A`. For example, `issortedrows(A, [2 4],{'ascend' 'descend'})` first checks if the rows of `A` are in ascending order based on the second column. Then, to break ties, `issortedrows` checks if the rows are in descending order based on the fourth column.

If `column` is specified, then the number of elements in the cell array must match the length of `column`. When `column` is not specified, the cell array must contain an element for every column of `A`, or a single element that is applied to all columns.

Data Types: `char` | `cell`

`tblA` — Input table

table | timetable

Input table, specified as a table or a timetable. Each variable in `tblA` must be a valid input to `sort` or `sortrows`.

Data Types: `table` | `timetable`

`rowDimName` — Name of first dimension of input table or timetable

character vector

Name of the first dimension of the input table or timetable, specified as a character vector.

- If `tblA` is a table with row names, then `rowDimName` is the name of the first dimension of the table. By default, the name of the first dimension is `'Row'`. Dimension names are a property of tables. You can access the dimension names of `tblA` using `tblA.Properties.DimensionNames`.
- If `tblA` is a timetable, then `rowDimName` is the name of the vector of row times. You can specify its name when you create a timetable, such as `Time` or `Date`. You can also access the dimension names using `tblA.Properties.DimensionNames`.

Example: If a table `T` has row names, and you changed the name of the first dimension using `T.Properties.DimensionName{1} = 'Name'`, then `issortedrows(T,'Name')` checks if the table is sorted by row names.

Example: If a timetable `TT` has a time vector named `Date`, then `issortedrows(TT,'Date')` checks if the timetable is sorted by the dates and times that `Date` contains.

Data Types: `char`

`vars` — Sorting variables

scalar integer | vector of integers | variable name | cell array of variable names | logical vector

Sorting variables, specified as a scalar integer, a vector of integers, a variable name, a cell array of variable names, or a logical vector. `vars` indicates the table variables to sort by.

If an element of `vars` is a positive integer, then `issortedrows` checks if the rows in the corresponding variable in `tblA` are in ascending order. If an element of `vars` is a negative integer, then `issortedrows` checks if the rows in the corresponding variable in `tblA` are in descending order.

Example: `issortedrows(tblA,{'Height','Weight'})` checks if the rows of `tblA` are in ascending order, first by the variable `Height`, then by the variable `Weight` to break ties.

Example: `issortedrows(tblA,[1 4])` first checks if the table rows are in ascending order based on the first variable, then breaks ties by checking if the rows are in ascending order based on the fourth variable.

Example: `issortedrows(TT,{'Time','X'})` checks if the row times of a timetable are in ascending order, then breaks ties by checking if the rows are in ascending order based on the table variable `'X'`.

Data Types: `double` | `single` | `char` | `cell` | `logical`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `issortedrows(A,'MissingPlacement','last')`

`'MissingPlacement'` — Placement of missing values
`'auto'` (default) | `'first'` | `'last'`

Placement of missing values (`NaN`, `NaT`, `<undefined>`, and `missing`) specified as the comma-separated pair consisting of `'MissingPlacement'` and one of the following:

- `'auto'` — Missing elements are required to be placed last for ascending order and first for descending order to return 1.
- `'first'` — Missing elements are required to be placed first to return 1.
- `'last'` — Missing elements are required to be placed last to return 1.

`'ComparisonMethod'` — Element comparison method
`'auto'` (default) | `'real'` | `'abs'`

Element comparison method, specified as the comma-separated pair consisting of `'ComparisonMethod'` and one of the following:

- `'auto'` — Check if the rows of `A` are sorted by `real(A)` when `A` is real, and check if the rows of `A` are sorted by `abs(A)` when `A` is complex.
- `'real'` — Check if the rows of `A` are sorted by `real(A)` when `A` is real or complex. If a column has elements with consecutive equal real parts, then check `imag(A)` to break ties.
- `'abs'` — Check if the rows of `A` are sorted by `abs(A)` when `A` is real or complex. If a column has elements with consecutive equal magnitude, then check `angle(A)` in the interval (-π,π] to break ties.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`issorted` | `sort` | `sortrows`

Introduced in R2017a

isspace

Determine which character array elements are space characters

Syntax

```
TF = isspace(A)
```

Description

`TF = isspace(A)` returns a logical array `TF`. If `A` is a character array, the elements of `TF` are logical `1` (`true`) where corresponding elements of `A` are space characters, and logical `0` (`false`) elsewhere. `isspace` recognizes all Unicode whitespace characters.

If `A` is not a character array, then `isspace` returns logical `0` (`false`).

Examples

Determine Which Character Array Elements Are Spaces

Create different arrays, and then determine which elements are space characters.

```
chr = '123 Main St.'
```

```
chr =
'123 Main St.'
```

```
TF = isspace(chr)
```

```
TF = 1×12 logical array
   0   0   0   1   0   0   0   0   1   0   0   0
```

Starting in R2016b, you can convert character arrays to strings using the `string` function. Convert `chr` to a string, and test it. The input argument is not a character array, so `isspace` returns `0`.

```
str = string(chr)
```

```
str =
"123 Main St."
```

```
TF = isspace(str)
```

```
TF = logical
   0
```

- "Create Character Arrays"
- "Search and Replace Text"

Input Arguments

A — Input array
scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. A can be any data type.

Tips

- To find space characters within elements of a string array, use the `isstrprop` function.
- To find all characters for which `isspace` returns logical `1`, use the code below. Then look up the returned decimal codes in a Unicode reference, such as the List of Unicode characters.

  ```
  find(isspace(char(1):char(intmax('uint16'))))
  ```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input values from the `char` class must be in the range 0–127.

See Also

See Also

`blanks` | `char` | `deblank` | `is*` | `isa` | `ischar` | `isletter` | `isnumeric` | `isstring` | `isstrprop` | `newline` | `regexp` | `string` | `strip` | `strtrim`

Topics

"Create Character Arrays"
"Search and Replace Text"

Introduced before R2006a

issparse

Determine whether input is sparse

Syntax

```
TF = issparse(S)
```

Description

`TF = issparse(S)` returns logical 1 (`true`) if the storage class of `S` is sparse and logical 0 (`false`) otherwise.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`sparse` | `full` | `is*`

Introduced before R2006a

isstr

Determine whether input is character array

Note: `isstr` is not recommended. Use `ischar` instead.

See Also

`ischar` | `isa` | `is*`

Introduced before R2006a

isstring

Determine if input is string array

Syntax

```
tf = isstring(A)
```

Description

`tf = isstring(A)` returns `1` (`true`) if `A` is a string array. Otherwise, it returns `0` (`false`).

Examples

Determine if Array Contains String Values

Create different arrays, and then determine if they are string arrays.

Test a character vector.

```
chr = 'Mary Jones'
```

```
chr =
'Mary Jones'
```

```
tf = isstring(chr)
```

```
tf = logical
   0
```

Character vectors are not strings, so `isstring` returns `0`.

Test a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Smith","Chung","Morales"; ...
```

```
       "Sanchez","Peterson","Adams"]
```

```
str = 2×3 string array
    "Smith"      "Chung"       "Morales"
    "Sanchez"    "Peterson"    "Adams"
```

```
tf = isstring(str)
```

```
tf = logical
   1
```

`str` is a string array, so `isstring` returns `1`.

- "Create String Arrays"
- "Create Character Arrays"

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. A can be any data type.

See Also

See Also

`cellstr` | `char` | `is*` | `isa` | `iscategorical` | `iscell` | `iscellstr` | `ischar` | `isstrprop` | `isstruct` | `istable` | `string`

Topics

"Create String Arrays"
"Create Character Arrays"

Introduced in R2016b

isstrprop

Determine if string is of specified category

Syntax

```
TF = isstrprop(str,category)
TF = isstrprop(str,category,'ForceCellOutput',tf)
```

Description

`TF = isstrprop(str,category)` determines if elements of input text are of the specified category, such as letters, numbers, or whitespace. For example, `isstrprop('ABC123','alpha')` returns a `1`-by-`6` logical array, `[1 1 1 0 0 0]`, indicating that the first three characters are letters.

- If `str` is a character array, string scalar, or numeric array, then `isstrprop` returns a logical array.
- If `str` is a cell array of character vectors or a string array, then `isstrprop` returns a cell array of logical vectors.

`TF = isstrprop(str,category,'ForceCellOutput',tf)`, where `tf` is `1` (`true`), returns `TF` as a cell array even when `str` is a character array, string scalar, or numeric array. The default for `tf` is `0` (`false`).

Examples

Determine Which Characters Are Letters

Create a character vector and determine which characters are letters.

```
chr = '123 Maple Street'
```

```
chr =
'123 Maple Street'
```

```
TF = isstrprop(chr,'alpha')
```

```
TF = 1×16 logical array
   0   0   0   0   1   1   1   1   1   0   1   1   1   1   1   1
```

Find indices for the letters in `chr` using `TF`.

```
idx = find(TF)
```

```
idx =

     5     6     7     8     9    11    12    13    14    15    16
```

```
chr(idx)
```

```
ans =
'MapleStreet'
```

Determine Types of Characters in String Arrays

Create string arrays. Then determine which characters belong to various categories using the `isstrprop` function.

Create a string scalar and determine which of its characters are numeric digits. Starting in R2017a, you can strings using double quotes instead of the `string` function.

```
str = "123 Maple Street"
```

```
str =

    "123 Maple Street"
```

```
TF = isstrprop(str,'digit')
```

```
TF =

  1×16 logical array

   1   1   1   0   0   0   0   0   0   0   0   0   0   0   0   0
```

Create a nonscalar string array. Determine which characters in each string are whitespace characters. `isstrprop` returns a cell array in which each cell contains results for a string in `str`.

```
str = ["123 Maple St.";"456 Oak St."]
```

```
str =

  2×1 string array

    "123 Maple St."
    "456 Oak St."
```

```
TF = isstrprop(str,'wspace')
```

```
TF =

  2×1 cell array

    [1×13 logical]
    [1×11 logical]
```

To display the results for the second string, `str(2)`, index into `TF{2}`.

```
TF{2}
```

```
ans =

  1×11 logical array

   0   0   0   1   0   0   0   1   0   0   0
```

Determine Types of Characters in Cell Array

Create a cell array of character vectors. Determine which characters are whitespace characters.

```
C = {'123 Maple St.';'456 Oak St.'}
```

```
C = 2×1 cell array
```

```
    '123 Maple St.'
    '456 Oak St.'
```

```
TF = isstrprop(C,'wspace')
```

```
TF = 2×1 cell array
    [1×13 logical]
    [1×11 logical]
```

Return Logical Vector in Cell Array

Find the punctuation characters in a character vector. `isstrprop` returns a logical vector indicating which characters belong to that category. Force `isstrprop` to return the logical vector in a cell array.

```
chr = 'A horse! A horse! My kingdom for a horse!'
```

```
chr =
'A horse! A horse! My kingdom for a horse!'
```

```
TF = isstrprop(chr,'punct','ForceCellOutput',true)
```

```
TF = cell
    [1×41 logical]
```

Find indices for the punctuation marks in `chr` using `TF{1}`.

```
find(TF{1})
```

```
ans =

     8    17    41
```

Determine Character Types in Numeric Array

Create a numeric array. Determine which numbers correspond to character codes for letters.

```
X = [77 65 84 76 65 66]
```

```
X =
```

```
    77    65    84    76    65    66
```

```
TF = isstrprop(X,'alpha')
```

```
TF = 1×6 logical array
   1   1   1   1   1   1
```

`isstrprop` identifies all the numbers as character codes for letters. Convert the numbers to their corresponding characters with the `char` function.

```
c = char(X)
```

```
c =
'MATLAB'
```

- "Search and Replace Text"
- "Compare Text"

Input Arguments

str — Input array

string array | character array | cell array of character vectors | numeric array

Input array, specified as a string array, character array, cell array of character vectors, or numeric array.

If `str` is a numeric array, then `isstrprop` treats the numbers as Unicode character codes. If the numbers are double- or single-precision floating-point numbers, then `isstrprop` rounds them to the nearest integer values before interpreting them as character codes.

Data Types: `string` | `char` | `cell` | `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

category — Character category

`'alpha'` | `'alphanum'` | `'cntrl'` | `'digit'` | `'graphic'` | ...

Character category, specified as a character vector or string scalar. `isstrprop` classifies the characters in `str` according to categories defined by the Unicode standard.

Category	Description
`alpha`	Letters.
`alphanum`	Letters or numeric digits.
`cntrl`	Control characters (for example, `char(0:20)`).
`digit`	Numeric digits.
`graphic`	Graphic characters. `isstrprop` treats all Unicode characters as graphic characters, except for the following: • Unassigned characters • Whitespace characters • The line separator • The paragraph separator • Control characters • Private user-defined characters • Surrogate characters
`lower`	Lowercase letters.
`print`	Graphic characters, plus `char(32)`.
`punct`	Punctuation characters.
`wspace`	Whitespace characters. This range includes the ANSI® C definition of whitespace, `{' ','\t','\n','\r','\v','\f'}`, in addition to some other Unicode characters.
`upper`	Uppercase letters.
`xdigit`	Valid hexadecimal digits.

`tf` — True or false
0 (default) | 1

True or false, specified as `1` or `0`.

Output Arguments

`TF` — True or false
logical array | cell array of logical vectors

True or false, returned as a logical array or cell array of logical vectors.

- If `str` is a character vector, string scalar, or numeric array, then `TF` is a logical array indicating which characters belong to the specified category.
- If `str` is a cell array of character vectors or a string array, then `TF` is a cell array. For each element of `str`, the corresponding cell of `TF` contains a logical vector indicating which characters in that element belong to the specified category.

Tips

Whitespace characters for which the `wspace` option returns `true` include tab, line feed, vertical tab, form feed, carriage return, and space, in addition to some other Unicode characters. To see all characters for which the `wspace` option returns `true`, enter the following command, and then look up the returned decimal codes in a Unicode reference:

```
find(isstrprop(char(1):char(intmax('uint16')),'wspace'))
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input array must be specified as a character array or an array of integers.
- Input values must be in the range 0-127.

See Also

See Also

`char` | `find` | `is*` | `isa` | `iscellstr` | `ischar` | `isletter` | `isnumeric` | `isspace` | `isstring` | `regexp` | `string`

Topics

"Search and Replace Text"
"Compare Text"

Introduced before R2006a

isstruct

Determine whether input is structure array

Syntax

```
tf = isstruct(A)
```

Description

`tf = isstruct(A)` returns logical `1` (`true`) if `A` is a MATLAB structure and logical `0` (`false`) otherwise.

Examples

```
patient.name = 'John Doe';
patient.billing = 127.00;
patient.test = [79 75 73; 180 178 177.5; 220 210 205];

isstruct(patient)

ans =

     1
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`struct` | `istable` | `isfield` | `iscell` | `ischar` | `isobject` | `isnumeric` | `islogical` | `isa` | `is*`

Topics

dynamic field names

Introduced before R2006a

isstudent

Determine if version is Student Version

Syntax

```
tf = isstudent
```

Description

`tf = isstudent` returns logical `1` (`true`) if the version of MATLAB software is the Student Version, and returns logical `0` (`false`) for commercial versions.

See Also

`ver` | `version` | `license` | `ispc` | `isunix` | `is*`

Introduced before R2006a

issymmetric

Determine if matrix is symmetric or skew-symmetric

Syntax

```
tf = issymmetric(A)
tf = issymmetric(A,skewOption)
```

Description

`tf = issymmetric(A)` returns logical `1` (`true`) if square matrix `A` is symmetric; otherwise, it returns logical `0` (`false`).

`tf = issymmetric(A,skewOption)` specifies the type of the test. Specify `skewOption` as `'skew'` to determine if `A` is skew-symmetric.

Examples

Test if Hermitian Matrix Is Symmetric

Create a 3-by-3 matrix.

```
A = [1 0 1i; 0 1 0;-1i 0 1]
```

```
A =
   1.0000 + 0.0000i   0.0000 + 0.0000i   0.0000 + 1.0000i
   0.0000 + 0.0000i   1.0000 + 0.0000i   0.0000 + 0.0000i
   0.0000 - 1.0000i   0.0000 + 0.0000i   1.0000 + 0.0000i
```

The matrix is Hermitian and has a real-valued diagonal.

Test whether the matrix is symmetric.

```
tf = issymmetric(A)
```

```
tf = logical
```

```
   0
```

The result is logical `0` (`false`) because `A` is not symmetric. In this case, `A` is equal to its complex conjugate transpose, `A'`, but not its nonconjugate transpose, `A.'`.

Change the element in `A(3,1)` to be `1i`.

```
A(3,1) = 1i;
```

Determine whether the modified matrix is symmetric.

```
tf = issymmetric(A)
```

```
tf = logical
   1
```

The matrix, `A`, is now symmetric because it is equal to its nonconjugate transpose, `A.'`.

Test if Matrix Is Skew-Symmetric

Create a 4-by-4 matrix.

```
A = [0 1 -2 5; -1 0 3 -4; 2 -3 0 6; -5 4 -6 0]
```

```
A =

     0     1    -2     5
    -1     0     3    -4
     2    -3     0     6
    -5     4    -6     0
```

The matrix is real and has a diagonal of zeros.

Specify `skewOption` as `'skew'` to determine whether the matrix is skew-symmetric.

```
tf = issymmetric(A,'skew')
```

```
tf = logical
   1
```

The matrix, A, is skew-symmetric since it is equal to the negation of its nonconjugate transpose, `-A.'`.

Input Arguments

A — Input matrix

numeric matrix

Input matrix, specified as a numeric matrix. If A is not square, then `issymmetric` returns logical `0` (`false`).

Data Types: `single` | `double` | `logical`
Complex Number Support: Yes

skewOption — Test type

`'nonskew'` (default) | `'skew'`

Test type, specified as `'nonskew'` or `'skew'`. Specify `'skew'` to test whether A is skew-symmetric.

Definitions

Symmetric Matrix

- A square matrix, A, is symmetric if it is equal to its nonconjugate transpose, `A = A.'`.

  In terms of the matrix elements, this means that

  $$a_{i,j} = a_{j,i} \ .$$

- Since real matrices are unaffected by complex conjugation, a real matrix that is symmetric is also Hermitian. For example, the matrix

  $$A = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 2 & 0 \\ 1 & 0 & 1 \end{bmatrix}$$

is both symmetric and Hermitian.

Skew-Symmetric Matrix

- A square matrix, `A`, is skew-symmetric if it is equal to the negation of its nonconjugate transpose, `A = -A.'`.

  In terms of the matrix elements, this means that

  $$a_{i,j} = -a_{j,i} \ .$$

- Since real matrices are unaffected by complex conjugation, a real matrix that is skew-symmetric is also skew-Hermitian. For example, the matrix

  $$A = \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}$$

  is both skew-symmetric and skew-Hermitian.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`ctranspose` | `ishermitian` | `isreal` | `transpose`

Introduced in R2014a

isTiled

Class: Tiff

Determine if tiled image

Syntax

```
tf = isTiled(tiffobj)
```

Description

`tf = isTiled(tiffobj)` returns `true` if the image has a tiled organization and `false` if the image has a stripped organization.

Examples

Determine if Image Has Tiled Organization

Open a `Tiff` object and check if the image in the TIFF file has a tiled or stripped organization.

```
t = Tiff('example.tif','r');
tf = isTiled(t)
```

```
tf = logical
   1
```

The image has a tiled organization.

Close the `Tiff` object.

```
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"

- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFIsTiled` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

istable

Determine whether input is table

Syntax

```
TF = istable(T)
```

Description

`TF = istable(T)` returns logical `1` (`true`) if `T` is a table, and logical `0` (`false`) otherwise.

Examples

Determine if Workspace Variable Is Table

Create a workspace variable, `T`.

```
T = table(categorical({'M';'F';'M'}),[45 45;41 32;40 34],...
    {'NY';'CA';'MA'},[true;false;false])
```

```
T = 3×4 table
    Var1      Var2      Var3    Var4
    ____    ________    ____    _____

    M       45    45    'NY'    true
    F       41    32    'CA'    false
    M       40    34    'MA'    false
```

Verify that the workspace variable, `T`, is a table.

```
istable(T)
```

```
ans = logical
   1
```

`T` is a table.

Determine if Subset of Table Is Table

Create a table, T.

```
T = table(categorical({'M';'F';'M'}),[45 45;41 32;40 34],...
    {'NY';'CA';'MA'},[true;false;false])
```

```
T = 3×4 table
    Var1      Var2      Var3    Var4
    ____    ________    ____    _____

    M       45    45    'NY'    true
    F       41    32    'CA'    false
    M       40    34    'MA'    false
```

Determine if the subset of table T that contains only the second and fourth variables is a table.

```
istable(T{:,[2 4]})
```

```
ans = logical
   0
```

Conversely, accessing data with curly braces, `T{:,[2 4]}`, returns a matrix and not a table.

Input Arguments

T — Input variable

workspace variable

Input variable, specified as a workspace variable. T can be any data type.

See Also

See Also

iscell | islogical | isnumeric | isobject | isstruct | table

Introduced in R2013b

istall

Determine if input is tall array

Syntax

```
tf = istall(X)
```

Description

`tf = istall(X)` returns logical `1` (`true`) if `X` is a tall array. Otherwise, it returns logical `0` (`false`). The output, `tf`, is an in-memory logical scalar.

Examples

Determine if Array is Tall

Create an array and determine if it is a tall array.

```
X = tall(randn(1000,3))
```

```
X =

  1,000×3 tall double matrix

    0.5377    0.6737    0.2962
    1.8339   -0.6691    1.2008
   -2.2588   -0.4003    1.0902
    0.8622   -0.6718   -0.3587
    0.3188    0.5756   -0.1299
   -1.3077   -0.7781    0.7337
   -0.4336   -1.0636    0.1203
    0.3426    0.5530    1.1363
    :         :         :
    :         :         :
```

```
tf = istall(X)
```

```
tf = logical
```

1

Input Arguments

X — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. X can be any data type.

See Also

See Also

`classUnderlying` | `isaUnderlying` | `tall`

Topics

"Tall Arrays"

Introduced in R2016b

istimetable

Determine if input is timetable

Syntax

```
TF = istimetable(A)
```

Description

`TF = istimetable(A)` returns logical `1` (`true`) if `A` is a timetable, and logical `0` (`false`) otherwise.

Examples

Determine If Workspace Variable is Timetable

Create a timetable and verify that it is a timetable.

```
Date = datetime({'2015-12-18';'2015-12-19';'2015-12-20'});
Temp = [37.3;39.1;42.3];
Pressure = [29.4;29.6;30.0];
Precip = [0.1;0.9;0.0];
TT = timetable(Date,Temp,Pressure,Precip)
```

```
TT = 3×3 timetable
        Date       Temp    Pressure    Precip
    ___________    ____    ________    ______

    18-Dec-2015    37.3    29.4        0.1
    19-Dec-2015    39.1    29.6        0.9
    20-Dec-2015    42.3      30          0
```

```
TF = istimetable(TT)
```

```
TF = logical
   1
```

Convert TT to a table, T. The `istimetable` function returns 0 because T is not a timetable.

```
T = timetable2table(TT);
TF = istimetable(T)
```

```
TF = logical
   0
```

- "Create Timetables"

Input Arguments

A — Input variable

workspace variable

Input variable, specified as a workspace variable. A can be any data type.

See Also

See Also

`iscell` | `islogical` | `isnumeric` | `isobject` | `isstruct` | `istable` | `timetable`

Topics

"Create Timetables"
"Tables"
"Represent Dates and Times in MATLAB"

Introduced in R2016b

istril

Determine if matrix is lower triangular

Syntax

```
tf = istril(A)
```

Description

`tf = istril(A)` returns logical `1` (`true`) if `A` is a lower triangular matrix; otherwise, it returns logical `0` (`false`).

Examples

Test Lower Triangular Matrix

Create a 5-by-5 matrix.

```
D = tril(magic(5))
```

```
D =

    17     0     0     0     0
    23     5     0     0     0
     4     6    13     0     0
    10    12    19    21     0
    11    18    25     2     9
```

Test `D` to see if it is lower triangular.

```
istril(D)
```

```
ans = logical
   1
```

The result is logical `1` (`true`) because all elements above the main diagonal are zero.

Test Matrix of Zeros

Create a 5-by-5 matrix of zeros.

```
Z = zeros(5);
```

Test `Z` to see if it is lower triangular.

```
istril(Z)
```

```
ans = logical
   1
```

The result is logical `1` (`true`) because a lower triangular matrix can have any number of zeros on its main diagonal.

Input Arguments

A — Input array

numeric array

Input array, specified as a numeric array. `istril` returns logical `0` (`false`) if `A` has more than two dimensions.

Data Types: `single` | `double`
Complex Number Support: Yes

Definitions

Lower Triangular Matrix

A matrix is lower triangular if all elements above the main diagonal are zero. Any number of the elements on the main diagonal can also be zero.

For example, the matrix

$$A = \begin{pmatrix} 1 & 0 & 0 & 0 \\ -1 & 1 & 0 & 0 \\ -2 & -2 & 1 & 0 \\ -3 & -3 & -3 & 1 \end{pmatrix}$$

is lower triangular. A diagonal matrix is both upper and lower triangular.

Tips

- Use the `tril` function to produce lower triangular matrices for which `istril` returns logical `1` (`true`).
- The functions `isdiag`, `istriu`, and `istril` are special cases of the function `isbanded`, which can perform all of the same tests with suitably defined upper and lower bandwidths. For example, `istril(A) == isbanded(A,size(A,1),0)`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`bandwidth` | `diag` | `isbanded` | `isdiag` | `istriu` | `tril` | `triu`

Introduced in R2014a

istriu

Determine if matrix is upper triangular

Syntax

```
tf = istriu(A)
```

Description

`tf = istriu(A)` returns logical `1` (`true`) if `A` is an upper triangular matrix; otherwise, it returns logical `0` (`false`).

Examples

Test Upper Triangular Matrix

Create a 5-by-5 matrix.

```
A = triu(magic(5))
```

```
A =

    17    24     1     8    15
     0     5     7    14    16
     0     0    13    20    22
     0     0     0    21     3
     0     0     0     0     9
```

Test `A` to see if it is upper triangular.

```
istriu(A)
```

```
ans = logical
   1
```

The result is logical `1` (`true`) because all elements below the main diagonal are zero.

Test Matrix of Zeros

Create a 5-by-5 matrix of zeros.

```
Z = zeros(5);
```

Test `Z` to see if it is upper triangular.

```
istriu(Z)
```

```
ans = logical
   1
```

The result is logical `1` (`true`) because an upper triangular matrix can have any number of zeros on the main diagonal.

Input Arguments

A — Input array
numeric array

Input array, specified as a numeric array. `istriu` returns logical `0` (`false`) if `A` has more than two dimensions.

Data Types: `single` | `double`
Complex Number Support: Yes

Definitions

Upper Triangular Matrix

A matrix is upper triangular if all elements below the main diagonal are zero. Any number of the elements on the main diagonal can also be zero.

For example, the matrix

$$A = \begin{pmatrix} 1 & -1 & -1 & -1 \\ 0 & 1 & -2 & -2 \\ 0 & 0 & 1 & -3 \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

is upper triangular. A diagonal matrix is both upper and lower triangular.

Tips

- Use the `triu` function to produce upper triangular matrices for which `istriu` returns logical `1` (`true`).
- The functions `isdiag`, `istriu`, and `istril` are special cases of the function `isbanded`, which can perform all of the same tests with suitably defined upper and lower bandwidths. For example, `istriu(A) == isbanded(A,0,size(A,2))`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`bandwidth` | `diag` | `isbanded` | `isdiag` | `istril` | `tril` | `triu`

Introduced in R2014a

isundefined

Find undefined elements in categorical array

Syntax

```
TF = isundefined(A)
```

Description

`TF = isundefined(A)` returns a logical array, `TF`, that indicates which elements in the categorical array, `A`, contain undefined values. `isundefined` returns logical `1` (`true`) for undefined elements; otherwise it returns logical `0` (`false`). The size of `TF` is the same as the size of `A`.

Any elements in `A` without a corresponding category are undefined. Undefined values are similar to `NaN` in numeric arrays.

Examples

Categorical Array with Undefined Values

Create a categorical array, `A`, from numeric values where `1`, `2`, and `3` represent red, green, and blue respectively.

```
A = categorical([4 1; 2 3; 2 1; 3 4; 1 1],1:3,{'red','green','blue'})
```

```
A = 5×2 categorical array
     <undefined>      red
     green            blue
     green            red
     blue             <undefined>
     red              red
```

`A` is a 5-by-2 categorical array with three categories: `red`, `green`, and `blue`. Array elements corresponding to the numeric value `4` in the input array to the `categorical` function do not have a corresponding category. Therefore, they are undefined in the output categorical array, `A`.

Find undefined elements in A.

```
TF = isundefined(A)
```

```
TF = 5×2 logical array
   1   0
   0   0
   0   0
   0   1
   0   0
```

A(1,1) and A(4,2) are undefined.

Input Arguments

A — Categorical array

vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

ismember

Introduced in R2013b

isunix

Determine if version is for Linux or Mac platforms

Syntax

```
tf = isunix
```

Description

`tf = isunix` returns logical `1` (`true`) if the version of MATLAB is for Linux or Apple macOS platforms. Otherwise, it returns logical `0` (`false`).

Examples

Execute MATLAB Command Based on Platform

```
if ismac
    % Code to run on Mac plaform
elseif isunix
    % Code to run on Linux plaform
elseif ispc
    % Code to run on Windows platform
else
    disp('Platform not supported')
end
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Returns true or false based on the MATLAB version used for code generation.
- Use only when the code generation target is S-function (Simulation) or MEX-function.

See Also

See Also

`computer` | `is*` | `ismac` | `ispc` | `isstudent`

Introduced before R2006a

isvalid (serial)

Determine whether serial port objects are valid

Syntax

```
out = isvalid(obj)
```

Description

`out = isvalid(obj)` returns the logical array `out`, which contains a `0` where the elements of the serial port object, `obj` are invalid serial port objects and a `1` where the elements of `obj` are valid serial port objects.

Examples

Suppose you create the following two serial port objects.

```
s1 = serial('COM1');
s2 = serial('COM1');
```

`s2` becomes invalid after it is deleted.

```
delete(s2)
```

`isvalid` verifies that `s1` is valid and `s2` is invalid.

```
sarray = [s1 s2];
isvalid(sarray)
```

```
ans =
     1     0
```

Tips

`obj` becomes invalid after it is removed from memory with the `delete` function. Because you cannot connect an invalid serial port object to the device, you should remove it from the workspace with the `clear` command.

See Also

`clear` | `delete`

Introduced before R2006a

isvarname

Determine if input is valid variable name

Syntax

```
tf = isvarname(s)
isvarname s
```

Description

`tf = isvarname(s)` determines if input `s` is a valid variable name. If `s` is a valid MATLAB variable name the `isvarname` function returns logical `1` (`true`). Otherwise it returns logical `0` (`false`).

A valid variable name begins with a letter and contains not more than `namelengthmax` characters. Valid variable names can include letters, digits, and underscores. MATLAB keywords are not valid variable names. To determine if the input is a MATLAB keyword, use the `iskeyword` function.

`isvarname s` is the command form of the syntax. The command form requires fewer special characters. You do not need parentheses or single quotes around the input.

Examples

Determine Variable Name Validity

Show that input that starts with a number is not a valid variable name.

```
s = '8th_column';
isvarname(s)
```

```
ans = logical
   0
```

Change the input to a valid variable name.

```
s = 'column_8';
isvarname(s)
```

```
ans = logical
   1
```

Use the command form to determine if the input is a valid variable name.

```
isvarname column_8
```

```
ans = logical
   1
```

Input Arguments

s — Potential variable name

character vector | string

Potential variable name, specified as a character vector, or string.

Example: `'myVar'`

Example: `"myVar2"`

See Also

See Also

`is*` | `iskeyword` | `matlab.lang.makeUniqueStrings` | `matlab.lang.makeValidName` | `namelengthmax`

Topics

"Variable Names"

Introduced before R2006a

isvector

Determine whether input is vector

Syntax

```
isvector(A)
```

Description

`isvector(A)` returns logical `1` (`true`) if size(A) returns `[1 n]` or `[n 1]` with a nonnegative integer value `n`, and logical `0` (`false`) otherwise.

Examples

Determine Vector

```
A = [1 2; 3 4];
isvector(A)
```

```
ans = logical
   0
```

```
V = A(:,1);
isvector(V)
```

```
ans = logical
   1
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`iscolumn` | `ismatrix` | `isrow` | `isscalar` | `isempty` | `isnumeric` | `islogical` | `ischar` | `isa` | `is*`

Introduced before R2006a

isweekend

Determine weekend elements

Syntax

```
tf = isweekend(t)
```

Description

`tf = isweekend(t)` returns an array the same size as `t` containing logical 1 (`true`) where the corresponding element of `t` is a datetime that occurs on a weekend day, and logical 0 (`false`) otherwise. Weekend days are Saturday and Sunday.

Examples

Determine If Date Occurs During Weekend

```
t = datetime(2014,5,2:5,'Format','eee dd-MMM-yyyy')
```

```
t = 1×4 datetime array
   Fri 02-May-2014   Sat 03-May-2014   Sun 04-May-2014   Mon 05-May-2014
```

```
tf = isweekend(t)
```

```
tf = 1×4 logical array
   0   1   1   0
```

May 3 and May 4, 2014 are days that fall on a weekend.

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`day` | `isdst`

Introduced in R2014b

j

Imaginary unit

Syntax

```
1j
z = a + bj
z = x + 1j*y
```

Description

`1j` returns the basic imaginary unit. `j` is equivalent to `sqrt(-1)`.

You can use `j` to enter complex numbers. You also can use the character `i` as the imaginary unit. To create a complex number without using `i` and `j`, use the `complex` function.

`z = a + bj` returns a complex numerical constant, `z`.

`z = x + 1j*y` returns a complex array, `z`.

Examples

Complex Scalar

Create a complex scalar and use the character, `j`, without a multiplication sign as a suffix in forming a complex numerical constant.

```
z = 1+2j
```

```
z =
   1.0000 + 2.0000i
```

Complex Vector

Create a complex vector from two 4-by-1 vectors of real numbers. `z` is a 4-by-1 complex vector.

```
x = [1:4]';
y = [8:-2:2]';

z = x+1j*y
```

```
z =
   1.0000 + 8.0000i
   2.0000 + 6.0000i
   3.0000 + 4.0000i
   4.0000 + 2.0000i
```

Complex Exponential

Create a complex scalar representing a complex vector with radius, `r`, and angle from the origin, `theta`.

```
r = 4;
theta = pi/4;

z = r*exp(1j*theta)
```

```
z =
   2.8284 + 2.8284i
```

Input Arguments

a — Real component of complex scalar
scalar

Real component of a complex scalar, specified as a scalar.

Data Types: `single` | `double`

b — Imaginary component of complex scalar
scalar

Imaginary component of a complex scalar, specified as a scalar.

If `b` is `double`, you can use the character, `j`, without a multiplication sign as a suffix in forming the complex numerical constant.

Example: `7j`

If `b` is `single`, you must use a multiplication sign when forming the complex numerical constant.

Example: `single(7)*j`

Data Types: `single` | `double`

x — Real component of complex array

scalar | vector | matrix | multidimensional array

Real component of a complex array, specified as a scalar, vector, matrix, or mulitdimensional array.

The size of `x` must match the size of `y`, unless one is a scalar. If either `x` or `y` is a scalar, MATLAB expands the scalar to match the size of the other input.

`single` can combine with `double`.

Data Types: `single` | `double`

y — Imaginary component of complex array

scalar | vector | matrix | multidimensional array

Imaginary component of a complex array, specified as a scalar, vector, matrix, or mulitdimensional array.

The size of `x` must match the size of `y`, unless one is a scalar. If either `x` or `y` is a scalar, MATLAB expands the scalar to match the size of the other input.

`single` can combine with `double`.

Data Types: `single` | `double`

Output Arguments

z — Complex array

scalar | vector | matrix | multidimensional array

Complex array, returned as a scalar, vector, matrix, or multidimensional array.

The size of `z` is the same as the input arguments.

`z` is `single` if at least one input argument is `single`. Otherwise, `z` is `double`.

Tips

- For speed and improved robustness in complex arithmetic, use `1i` and `1j` instead of `i` and `j`.
- Since `j` is a function, it can be overridden and used as a variable. However, it is best to avoid using `i` and `j` for variable names if you intend to use them in complex arithmetic.
- Use the `complex` function to create a complex output in the following cases:
  - When the names `i` and `j` might be used for other variables (and do not equal `sqrt(-1)`)
  - When the inputs are not `double` or `single`
  - When the imaginary component is all zeros

See Also

See Also

`complex` | `conj` | `i` | `imag` | `real`

Topics

"Complex Numbers"

Introduced before R2006a

jet

Jet colormap array

Syntax

```
c = jet
c = jet(m)
```

Description

`c = jet` returns the jet colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.



`c = jet(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the jet colormap.

```
surf(peaks);
colormap('jet');
```

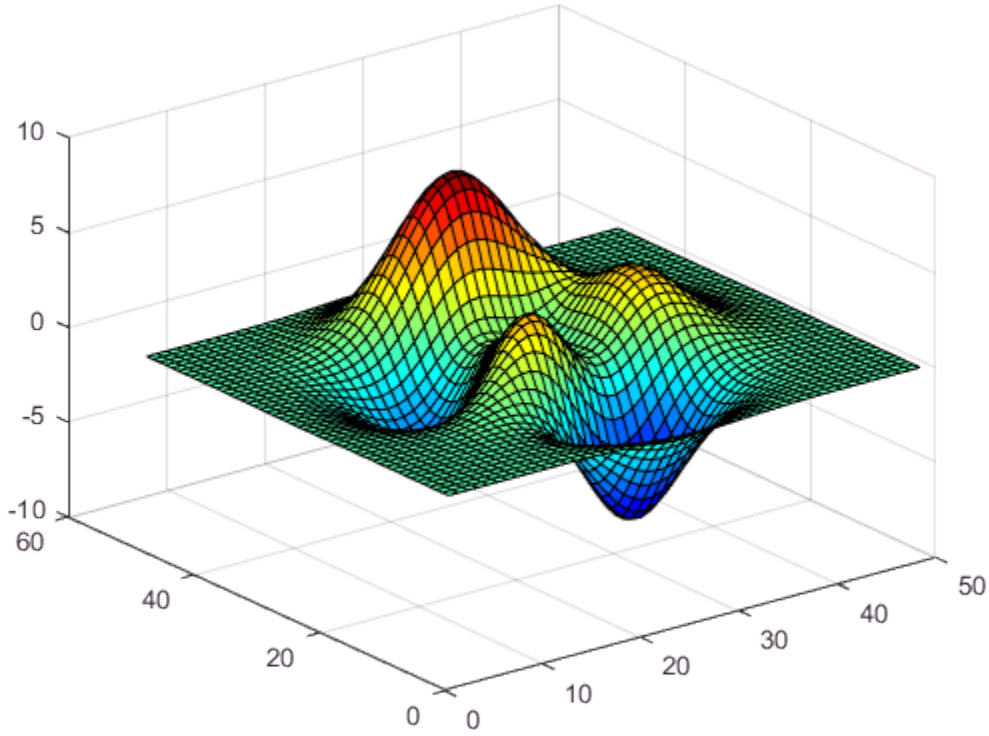

Get the jet colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = jet;
c = flipud(c);
colormap(c);
```

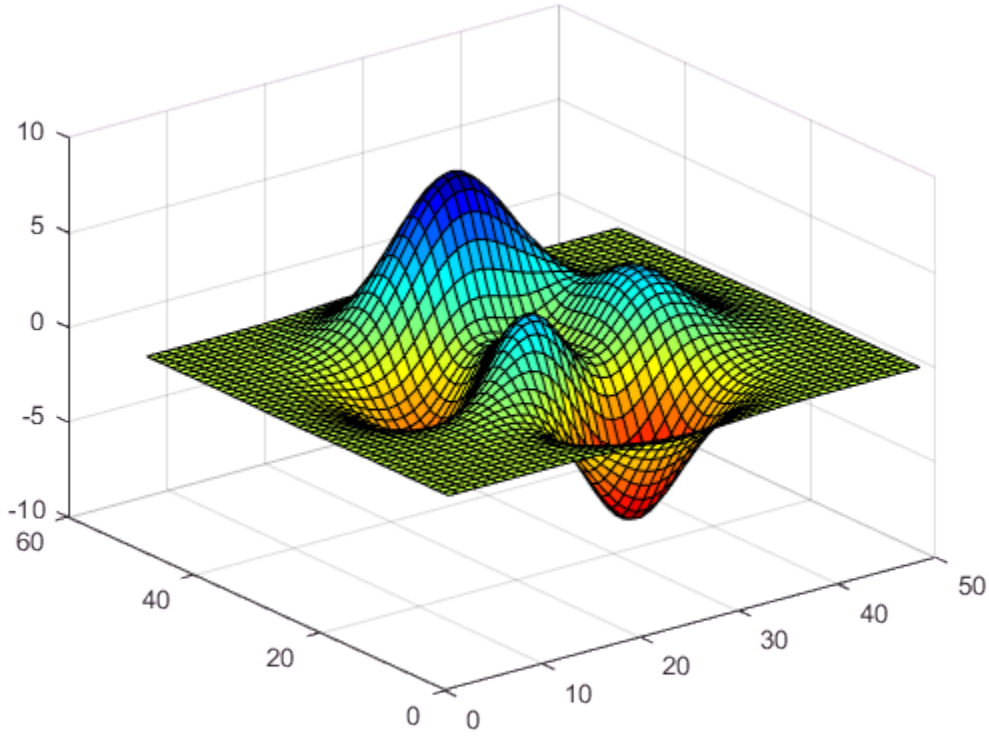

Downsample the Jet Colormap

Get a downsampled version of the jet colormap containing only ten colors. Then display the contours of the peaks function by applying the colormap and interpolated shading.

```
c = jet(10);
surf(peaks);
colormap(c);
shading interp;
```

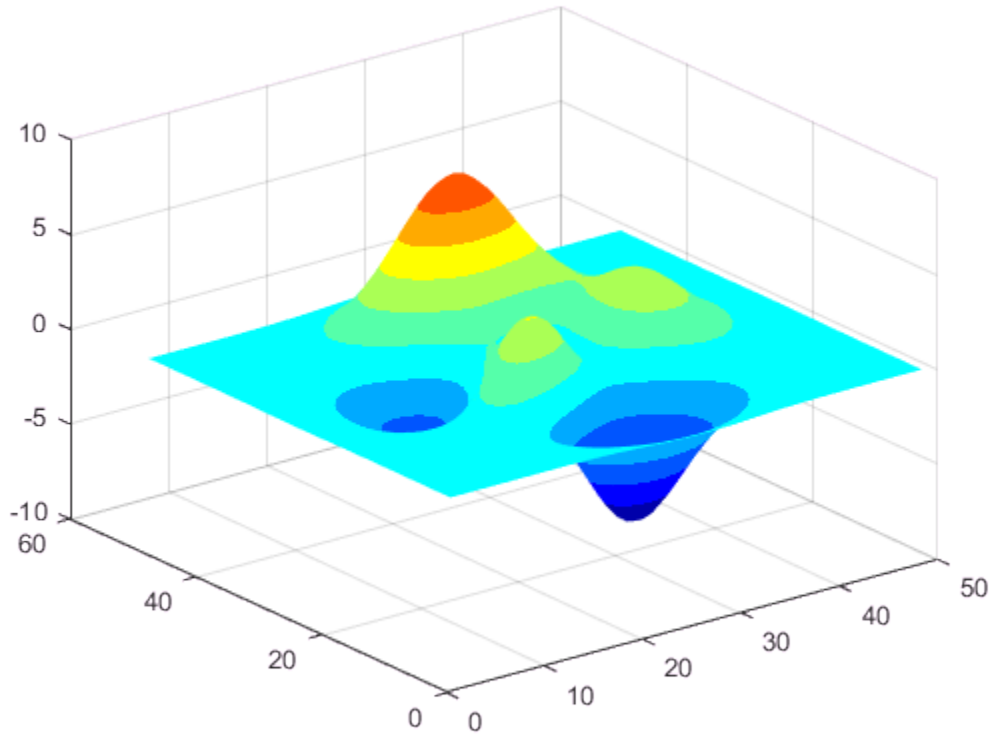

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

jsondecode

Decode JSON-formatted text

Syntax

```
value = jsondecode(text)
```

Description

`value = jsondecode(text)` parses JSON text.

Examples

Decode JSON Text

Display the JSON-formatted string `["one", "two", "three"]`.

```
jsondecode('["one", "two", "three"]')
```

```
ans = 3×1 cell array
    'one'
    'two'
    'three'
```

Input Arguments

`text` — JSON-formatted text
character vector

JSON-formatted text, specified as a character vector. Invalid names in the JSON text are made valid with `matlab.lang.makeValidName`.

Example: `'{"IDs":[116,943,234,38793]}'`

Data Types: `char`

Output Arguments

`value` — MATLAB data
any MATLAB data type

MATLAB data returned as decoded JSON-formatted text. `value` depends on the data encoded in `text`.

Algorithms

JSON supports fewer data types than MATLAB. `jsondecode` converts JSON data types to the MATLAB data types in this table. `jsondecode` converts JSON object field names to MATLAB structure field names.

JSON Data Type	MATLAB Data Type
null, in numeric arrays	NaN
null, in nonnumeric arrays	Empty `double []`
Boolean	Scalar `logical`
Number	Scalar `double`
String	Character vector
Object (In JSON, *object* means an unordered set of name-value pairs.)	Scalar structure (Names are made valid using `matlab.lang.makeValidName`.)
Array, when elements are of different data types	Cell array
Array of booleans	Array of `logical`
Array of numbers	Array of `double`
Array of strings	Cell array of character vectors
Array of objects — Same field names	Structure array
Array of objects — Different field names	Cell array of scalar structures

See Also

See Also

`fileread` | `jsonencode` | `matlab.lang.makeValidName` | `webread`

Introduced in R2016b

jsonencode

Encode structured MATLAB data as JSON-formatted text

Syntax

```
text = jsonencode(value)
```

Description

`text = jsonencode(value)` encodes `value` and returns a character vector in JSON format.

Examples

Convert Cell Array of Text to JSON

```
value = {'one'; 'two'; 'three'};
jsonencode(value)
```

```
ans =
'["one","two","three"]'
```

Input Arguments

`value` — MATLAB data
any MATLAB data type except enumerations

MATLAB data, specified as any MATLAB data type except enumerations.

Example: `s.IDs = [116, 943, 234, 38793]`

Output Arguments

`text` — JSON-formatted text
character vector

JSON-formatted text, returned as a character vector.

Limitations

- `jsonencode` does not support complex numbers, sparse arrays, or MATLAB enumerations.
- `jsonencode` does not support recursive structures such as graphics objects that contain references to parent and child objects.
- If you encode, then decode a value, MATLAB does not guarantee that the data type is preserved. JSON supports fewer data types than MATLAB, which results in loss of type information. For example, JSON data does not distinguish between `double` and `int32`. If you encode an `int32` value and then call `jsondecode`, the decoded value is type `double`.
- MATLAB does not guarantee that the shape of an array is preserved. For example, a 1-by-N numeric vector is encoded as an array. If you call `jsondecode`, then MATLAB decodes the array as an N-by-1 vector.

Algorithms

JSON supports fewer data types than MATLAB. `jsonencode` converts MATLAB data types to the JSON data types listed here.

MATLAB Data Type	JSON Data Type	Example	Output
array, empty	Array, empty	`jsonencode([])` `jsonencode(string.empty)`	`'[]'`
logical scalar	Boolean	`jsonencode(true)`	`'true'`
logical vector	Array of booleans	`jsonencode([true,false,false`	`'[true,false,false]'`
logical array	Nested array of booleans	`jsonencode(logical([0,1,0,1,`	`'[false,true,false,true,true,false]'`
character vector	String	`jsonencode('This is a char.'`	`'"This is a char."'`

MATLAB Data Type	JSON Data Type	Example	Output
character array	Array of strings	`jsonencode(['AC';'EG'])`	`'["AC","EG"]'`
string scalar	String	`jsonencode("This is a string`	`'"This is a string."'`
string vector	Array of strings	`jsonencode(["AC";"EG"])`	`'["AC","EG"]'`
string array	Nested array of strings	`jsonencode(["AC","EG";"BD","`	`'[["AC","EG"],["BD","FH"]]'`
empty character vector	String	`jsonencode('')`	`'""'`
`<missing`	null	`jsonencode(string(nan))`	`'null'`
numeric scalar	Number	`jsonencode(2.5)`	`'2.5'`
numeric vector	Array of numbers	`jsonencode(1:3)`	`'[1,2,3]'`
numeric array	Nested array of numbers	`jsonencode(eye(2))`	`'[[1,0],[0,1]]'`
complex numbers	Not supported		

table	Array of objects	`Name = {'Jones';'Brown'};`
		`Age = [40;49];`
		`jsonencode(table(Name,Age))`
			`'[{"Name":"Jones","Age":40},{"Name":"Br`

cell	Array	`jsonencode({'a',true,[2;3]})`	`'["a",true,[2,3]]'`

MATLAB Data Type	JSON Data Type	Example	Output
structure scalar object scalar	Object Object (Public properties encoded as `name-value` pairs.)	`jsonencode(struct('a','value`	`'{"a":"value"}'`
structure vector object vector	Array of objects	`jsonencode(struct('a',{true,`	`'[{"a":true},{"a":true},{"a":false}]'`
structure array object array	Nested array of objects		
datetime scalar	String (`string` method used to convert date and time to string format.)	`jsonencode(datetime('tomorro`	`'"04-Nov-2016"'`
datetime vector	Array of strings		

datetime array	Nested array of strings	`DT = datetime({'8 April 2015`
		`'InputFormat','d MMMM yy`
		`jsonencode(DT)`
			`'["08-Apr-2015","09-May-2015"]'`

MATLAB Data Type	JSON Data Type	Example	Output
categorical scalar	String (`string` method used to create string format.)	`jsonencode(categorical({'r';`	`'["r","g","b"]'`

categorical vector	Array of strings	`jsonencode(categorical( ...`
		`{'r' 'b' 'g'; ...`
		`'g' 'r' 'b'; ...`
		`'b' 'r' 'g'}))`
			`'[["r","b","g"],["g","r","b"],["b","r",`

categorical array	Nested array of strings		

containers	Object	`jsonencode(containers.Map( .`
		`{'Jan','Feb','Mar'}, ...`
		`[327,368,197]))`
			`'{"Feb":368,"Jan":327,"Mar":197}'`

See Also

See Also

`jsondecode` | `webwrite`

Introduced in R2016b

javaaddpath

Add entries to dynamic Java class path

Syntax

```
javaaddpath(dpath)
javaaddpath(dpath,'-end')
```

Description

`javaaddpath(dpath)` adds one or more folders or Java Archive (JAR) files to the beginning of the current dynamic class path. Use the dynamic path when developing and debugging your own Java classes.

The `javaaddpath` command clears the definitions of all Java classes defined by files on the dynamic class path.

`javaaddpath(dpath,'-end')` adds files or folders to the end of the path.

Examples

Add Folder to Dynamic Class Path

Display the current dynamic path. The output reflects your configuration.

```
javaclasspath('-dynamic')
```

```
  DYNAMIC JAVA PATH

    <empty>
```

Add the current folder.

```
javaaddpath(pwd)
```

Display the updated dynamic path. The output reflects your current folder.

```
p = javaclasspath
```

```
p =
    'c:\work\Java'
```

Append URL to Dynamic Class Path

```
javaaddpath('http://www.example.com','-end')
p = javaclasspath
```

```
p =
    'c:\work\Java'
    'http://www.example.com'
```

Input Arguments

`dpath` — Folder or JAR file

string | array of strings | character vector | cell array of character vectors

Folder or JAR file, specified as a string, an array of strings, a character vector, or a cell array of character vectors, to add to the dynamic path. When you add a folder to the path, MATLAB includes all files in that folder as part of the path.

Data Types: `char` | `cell`

Limitations

- MATLAB does not support JAR files generated by the MATLAB Compiler SDK product.

Tips

- Use the dynamic path while you develop your own Java classes. After you develop and debug a Java class, add the class to the static path. For more information, see `javaclasspath`.
- To add folders to the static path, which MATLAB loads at startup, create a `javaclasspath.txt` file, as described in “Static Path”.

See Also

See Also

`clear` | `javaclasspath` | `javarmpath`

Topics

"Java Class Path"

Introduced before R2006a

javaArray

Construct Java array object

Syntax

```
ObjArr = javaArray(PackageName.ClassName,x1,...,xN)
```

Description

`ObjArr = javaArray(PackageName.ClassName,x1,...,xN)` constructs an empty Java array object for objects of the specified `PackageName.ClassName` class. The array created by `javaArray` is equivalent to the array created by the following Java code.

```
A = new PackageName.ClassName[x1]...[xN];
```

Examples

Create 4-By-5 Java Array

Create 4-by-5 array of `java.lang.Double` type.

```
x1 = 4;
x2 = 5;
dblArray = javaArray('java.lang.Double',x1,x2);
```

Fill in values.

```
for m = 1:x1
    for n = 1:x2
        dblArray(m,n) = java.lang.Double((m*10) + n);
    end
end
```

Display results.

```
dblArray
```

```
dblArray =

  java.lang.Double[][]:
```

```
[11]    [12]    [13]    [14]    [15]
[21]    [22]    [23]    [24]    [25]
[31]    [32]    [33]    [34]    [35]
[41]    [42]    [43]    [44]    [45]
```

Input Arguments

`PackageName.ClassName` — Name of Java class
string | character vector

Name of the Java class, including the package name, specified as a string or character vector.

Data Types: `char`

`x1,...,xN` — Dimensions of array
integer

Dimensions of the array, specified as an integer. If any argument is zero, `javaArray` creates a zero-length Java array with the specified number of dimensions. A zero-length Java array is not the same as an empty MATLAB array, which is converted to a Java `null` when passed to a Java method.

Data Types: `double`

Output Arguments

`ObjArr` — Java array
Java array

Java array with dimensions `x1,...,xN`.

Definitions

Java Array Object

A Java array object is an object with Java dimensionality. For more information, see "How MATLAB Represents Java Arrays".

Tips

- To create an array of primitive Java types, create an array of the equivalent MATLAB type. For more information, see “MATLAB Type to Java Type Mapping”.

See Also

See Also

`class` | `isjava` | `javaMethod` | `javaObject` | `methodsview`

Topics

“How MATLAB Represents Java Arrays”

Introduced before R2006a

javachk

Error message based on Java feature support

Syntax

```
MSG = javachk(feature)
javachk(feature,component)
```

Description

`MSG = javachk(feature)` returns a generic error message if the specified Java feature is not available in the current MATLAB session.

`javachk(feature,component)` also names the specified `component` in the error message.

Examples

Generate Error If Java Not Available

The following statements test if Java is available before calling a Java command. The `isempty` function is true when there is no error.

```
if isempty(javachk('jvm'))
   scalar = java.lang.Double(5);
end
```

Test Java Availability in User-Defined Script

To provide context in the `javachk` error message, add the optional text parameter to the `javachk` function.

Create a script, `myFile.m`, with the following statements. The script checks if Java is available before calling Java to create a frame.

```
error(javachk('awt','myFile'))
```

```
myFrame = java.awt.Frame;
myFrame.setVisible(1)
```

Start MATLAB from the Linux system prompt.

```
matlab -nojvm
```

Run the script.

```
myFile
```

If Java is not available, MATLAB displays this error, identifying the source as the `myFile` script.

```
Error using myFile (line 1)
myFile is not supported because:
Java is not currently available.
```

Input Arguments

`feature` — Java feature

`'awt'` | `'desktop'` | `'jvm'` | `'swing'`

Java feature, specified as one of these values:

`'awt'`	UI components in the Java Abstract Window Toolkit (AWT) are available.
`'desktop'`	MATLAB interactive desktop is running.
`'jvm'`	Java Virtual Machine software (JVM™) is running.
`'swing'`	Swing components (Java lightweight UI components in the Java Foundation Classes) are available.

`component` — Identifier

character vector

Identifier, specified as a character vector, to display in the error message.

Data Types: `char`

Output Arguments

`MSG` — Error message
structure

Error message, returned as a structure with the following fields. If the feature is available, `javachk` returns an error structure with empty fields.

`message` — Message
character vector | empty

Message, specified as a character vector.

`identifier` — Identifier
character vector | empty

Identifier, specified as a character vector.

See Also

See Also

`error` | `usejava`

Introduced before R2006a

javaclasspath

Return Java class path or specify dynamic path

Syntax

```
javaclasspath
javaclasspath('-dynamic')
javaclasspath('-static')
```

```
dpath = javaclasspath
spath = javaclasspath('-static')
jpath = javaclasspath('-all')
```

```
javaclasspath(dpath)
javaclasspath(dpath1,dpath2)
```

```
javaclasspath(statusmsg)
```

Description

`javaclasspath` displays the static and dynamic segments of the Java class path.

`javaclasspath('-dynamic')` displays the dynamic path.

`javaclasspath('-static')` displays the static path.

`dpath = javaclasspath` returns the dynamic path, `dpath`.

`spath = javaclasspath('-static')` returns the static path, `spath`.

`jpath = javaclasspath('-all')` returns the entire path, `jpath`. The returned cell array contains first the static segment of the path, and then the dynamic segment.

`javaclasspath(dpath)` changes the dynamic path to `dpath`. Use this syntax to reload Java classes you are actively developing and debugging.

`javaclasspath(dpath1,dpath2)` changes the dynamic path to the concatenation of paths `dpath1,dpath2`.

`javaclasspath(statusmsg)` enables or disables the display of status messages.

Examples

Modify Path Using Cell Array

Use a cell array to add folders to an existing Java class path.

Create a cell array with two path values.

```
dpath = {'http://domain.com','http://some.domain.com/jarfile.jar'};
```

Set the message flag to display the class-loading messages.

```
javaclasspath('-v1')
```

Add the paths in `dpath` to the class path.

```
javaclasspath(dpath)
```

```
Loading following class path(s) from local file system:
* http://domain.com
* http://some.domain.com/jarfile.jar
```

Display the updated dynamic path. MATLAB adds folders from `dpath` to the existing path. The output depends on your system configuraion.

```
javaclasspath('-dynamic')
```

```
  DYNAMIC JAVA PATH

 http://domain.com
 http://some.domain.com/jarfile.jar
```

Capture Contents of Dynamic Path

Create a cell array, `p`, with the entries of the dynamic path. If there are no entries on the dynamic path, then MATLAB creates an empty cell array.

```
javaclasspath('-v0') % Suppress display of class-loading messages
p = javaclasspath
```

```
p =
```

```
{}
```

Input Arguments

dpath — Path entries

string | array of strings | character vector | cell array of character vectors

Path entries, specified as a string, an array of strings, a character vector, or a cell array of character vectors, for the dynamic path. MATLAB converts relative paths to absolute paths.

Example: `javaclasspath('http://domain.com')`

Data Types: `char` | `cell`

dpath1,dpath2 — Path entries

string | array of strings | character vector | cell array of character vectors

Path entries, specified as a string, an array of strings, a character vector, or a cell array of character vectors, concatenated, for the dynamic path.

Data Types: `char` | `cell`

statusmsg — Message flag

`'-v0'` (default) | `'-v1'`

Message flag, specified as one of these values:

`'-v0'`	Do not display status messages when loading the Java path from the file system.
`'-v1'`	Display status messages.

The `statusmsg` argument controls status message display from the `javaclasspath`, `javaaddpath`, and `javarmpath` functions.

Output Arguments

dpath — Dynamic path entries

array of strings | cell array of character vectors

Dynamic path entries for the current path, returned as an array of strings or a cell array of character vectors. If there are no path entries, then `dpath` is an empty cell array.

`spath` — Static path entries
array of strings | cell array of character vectors

Static path entries for the current path, returned as an array of strings or a cell array of character vectors. If there are no path entries, then `spath` is an empty cell array.

`jpath` — All path entries
array of strings | cell array of character vectors

All path entries, returned as an array of strings or a cell array of character vectors. If there are no path entries, then `jpath` is an empty cell array.

Definitions

Static Path

The static path is a segment of the Java path that is loaded at the start of each MATLAB session from the MATLAB built-in Java path and the file `javaclasspath.txt`.

MATLAB searches the static path before the dynamic path.

The static Java path offers better Java class-loading performance than the dynamic Java path. To modify the static Java path, edit the file `javaclasspath.txt` and restart MATLAB. For more information, see “Static Path”.

Dynamic Path

The dynamic path is a segment of the Java class path.

MATLAB provides the dynamic path as a convenience for when you develop your own Java classes. You can load the dynamic path any time during a MATLAB session using the `javaclasspath` function. Although the dynamic path offers flexibility in changing the path, Java classes on the dynamic path might load more slowly than classes on the static path. Also, classes on the dynamic path might not behave the same way as classes on the static path. If your class does not behave as expected, then use the static path. After you develop and debug a Java class, add the class to the static path.

- To define the dynamic path, use `javaclasspath`.
- To modify the path. use `javaaddpath` and `javarmpath`.
- To refresh the Java class definitions for all classes on the dynamic path without restarting MATLAB, use `clear java`.

For more information, see "Dynamic Path".

Tips

- Do not put Java classes on the static path that have dependencies on classes on the dynamic path. Such dependencies produce run-time errors.
- To clear the definitions of all Java classes defined by files on the dynamic class path, call the `clear` command.
- Adding an entry to the dynamic path when it is already specified on the static path produces a warning.

See Also

See Also

`clear` | `javaaddpath` | `javarmpath`

Topics

"Java Class Path"

Introduced before R2006a

matlab.exception.JavaException class

Package: matlab.exception

Capture error information for Java exception

Description

Process information from a `matlab.exception.JavaException` object to handle Java errors thrown by Java methods called from MATLAB. This class is derived from MException.

Construction

`e = matlab.exception.JavaException(msgID,errMsg,excObj)` constructs instance `e` of `matlab.exception.JavaException` class.

Input Arguments

`msgID`

Message identifier

`errMsg`

Error message text

`excObj`

`java.lang.Throwable` object that caused the exception

Output Arguments

`e`

Instance of `matlab.exception.JavaException` class

Properties

`ExceptionObject`

Java exception object that caused the error

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

To display error information, use a `matlab.exception.JavaException` object in a `try-catch` statement.

```
try
    java.lang.Class.forName('myfunction');
catch e
    e.message
    if(isa(e,'matlab.exception.JavaException'))
        ex = e.ExceptionObject;
        assert(isJava(ex));
        ex.printStackTrace;
    end
end
```

Tips

- You do not typically construct a `matlab.exception.JavaException` object explicitly. MATLAB automatically constructs a `JavaException` object whenever Java throws an exception. The `JavaException` object wraps the original Java exception.

See Also

Topics

"Capture Information About Exceptions"
"Throw an Exception"

Introduced in R2012b

javaMethod

Call Java method

Syntax

```
javaMethod(MethodName,JavaObj,x1,...,xN)
javaMethod(StaticMethodName,ClassName,x1,...,xN)
```

Description

`javaMethod(MethodName,JavaObj,x1,...,xN)` calls the method in the class of the Java object array with the signature matching the arguments `x1,...,xN`. Use `javaMethod` to call methods having names that exceed the maximum length of a MATLAB identifier. This approach is the only way you can call such a method in MATLAB. To obtain the maximum identifier length, call the `namelengthmax` function.

In general, use MATLAB syntax to call methods on Java objects.

```
method(object,arg1,...,argn)
```

Alternatively, use Java syntax.

```
object.method(arg1,...,argn)
```

`javaMethod(StaticMethodName,ClassName,x1,...,xN)` calls the static method in class `ClassName`.

In general, use MATLAB syntax to call static methods on Java objects.

```
class.method(arg1,...,argn)
```

Examples

Call Method on Java Object

Create a `java.util.Date` object `myDate` and change the month to April, which has a numeric value of `3`.

```
myDate = java.util.Date;
javaMethod('setMonth',myDate,3)
```

Call Static Method

Call `java.lang.Double` static method `isNaN` to test variable `num`. Since `num` contains a number, no message is displayed.

```
num = 2.2;
if javaMethod('isNaN','java.lang.Double',num)
    disp('This is not a number')
end
```

Call Method Specified at Runtime

Search for a text pattern in a string using variables for the pattern and for the search method. These variables could be set at runtime from user input.

Choose method, `startsWith`, and identify pattern, `str`.

```
fnc = 'startsWith';
str = java.lang.String('Four score');
```

Identify text to search.

```
gAddress = java.lang.String('Four score and seven years ago');
```

Search `gAddress` for the pattern.

```
javaMethod(fnc,gAddress,str)
```

```
ans = logical
   1
```

`gAddress` starts with the words `Four score`.

Call Java Inner Class

Call the constructor of or a static method in an inner class. In the `javaMethod` and `javaObject` functions, specify the class name, using the `$` character, as `OuterClass$InnerClass`.

For example, suppose class `com.ams.MyClass` contains class `MyInnerClass` with static method `methodname`. In Java, the calling syntax is:

```
out = com.ams.MyClass.MyInnerClass.methodname(arg);
```

In MATLAB, type:

```
out = javaMethod('methodname','com.ams.MyClass$MyInnerClass',arg)
```

Input Arguments

`MethodName` — Name of nonstatic Java method

string | character vector

Name of a nonstatic Java method, specified as a string or character vector.

Example: `javaMethod('DataDefinitionAndDataManipulationTransactions',T)`

Data Types: `char` | `string`

`JavaObj` — Array

Java object

Array, specified as a Java object of the class containing the method.

`x1,...,xN` — Java method input arguments

any type

Java method input arguments, 1 through N (if any), required by `MethodName` or `StaticMethodName`, specified by any type. The method argument list specifies the argument type.

`StaticMethodName` — Name of static Java method

string | character vector

Name of a static Java method, specified as a string or character vector.

Example: `java.lang.Double.isNaN(2.2)`

Data Types: `char` | `string`

`ClassName` — Name of Java class

string | character vector

Name of a Java class, specified as a string or character vector, containing `StaticMethodName`.

Data Types: `char` | `string`

Tips

- Use `javaMethod` to specify the method name as a variable to be invoked at run time. When calling a static method, you also can use a variable in place of the class name argument. For example, see "Call Method Specified at Runtime" on page 1-6198.

See Also

See Also

`import` | `isjava` | `javaArray` | `javaMethodEDT` | `javaObject` | `methods`

Introduced before R2006a

javaMethodEDT

Call Java method from Event Dispatch Thread (EDT)

Syntax

```
javaMethodEDT(MethodName,JavaObj,x1,...,xN)
javaMethodEDT(StaticMethodName,ClassName,x1,...,xN)
```

Description

`javaMethodEDT(MethodName,JavaObj,x1,...,xN)` calls the method in the class of the Java object array with the signature matching the arguments `x1,...,xN`. MATLAB calls the method from the Event Dispatch Thread (EDT).

`javaMethodEDT(StaticMethodName,ClassName,x1,...,xN)` calls the static method in class `ClassName`.

Examples

Call Method from EDT

Create a `java.util.Vector` object `v` and add a `string` element.

```
v = java.util.Vector;
javaMethodEDT('add',v,'string');
```

Input Arguments

`MethodName` — Name of nonstatic Java method

string | character vector

Name of a nonstatic Java method, specified as a string or character vector.

Example: `javaMethod('DataDefinitionAndDataManipulationTransactions',T)`

Data Types: `char` | `string`

`JavaObj` — Array
Java object

Array, specified as a Java object of the class containing the method.

`x1,...,xN` — Java method input arguments
any type

Java method input arguments, 1 through N (if any), required by `MethodName` or `StaticMethodName`, specified by any type. The method argument list specifies the argument type.

`StaticMethodName` — Name of static Java method
string | character vector

Name of a static Java method, specified as a string or character vector.

Example: `java.lang.Double.isNaN(2.2)`

Data Types: `char` | `string`

`ClassName` — Name of Java class
string | character vector

Name of a Java class, specified as a string or character vector, containing `StaticMethodName`.

Data Types: `char` | `string`

Definitions

EDT

The EDT is the Event Dispatch Thread, used in Java.

See Also

See Also

`import` | `isjava` | `javaMethod` | `javaObjectEDT` | `methods`

Introduced in R2009a

javaObject

Call Java constructor

Syntax

```
JavaObj = javaObject(ClassName,x1,...,xN)
```

Description

`JavaObj = javaObject(ClassName,x1,...,xN)` returns Java object array, `JavaObj`, created by the Java constructor for the class with the argument list matching `x1,...,xN`.

Examples

Create Java Object

Create a Java® object `strObj` of class `java.lang.String`.

```
strObj = javaObject('java.lang.String','hello');
```

- "Call Java Method"

Input Arguments

`ClassName` — Name of Java class
string | character vector

Name of a Java class, specified as a string or character vector.

Data Types: `char`

`x1,...,xN` — Java constructor input arguments
any type

Java constructor input arguments, 1 through N (if any), required by `ClassName`, specified as any type. The class constructor argument list specifies the argument type.

See Also

See Also

`import` | `javaArray` | `javaMethod` | `javaObjectEDT` | `methods`

Topics

"Call Java Method"

Introduced before R2006a

javaObjectEDT

Call Java constructor on Event Dispatch Thread (EDT)

Syntax

```
JavaObj = javaObjectEDT(ClassName,x1,...,xN)
```

Description

`JavaObj = javaObjectEDT(ClassName,x1,...,xN)` returns Java object array, `JavaObj`, created from the EDT by the Java constructor for the class with the signature matching the arguments `x1,...,xN`.

Examples

Construct Java Object Array from the EDT

```
f = javaObjectEDT('javax.swing.JFrame','New Title');
```

Call Method on Java Object

Create a `JOptionPane` on the EDT.

```
optPane = javaObjectEDT('javax.swing.JOptionPane');
```

Call the `createDialog` method on the EDT.

```
dlg = optPane.createDialog([],'Sample Dialog');
```

Input Arguments

`ClassName` — Name of Java class
string | character vector

Name of a Java class, specified as a string or character vector.

Data Types: `char`

`x1, ..., xN` — Java constructor input arguments
any type

Java constructor input arguments, 1 through N (if any), required by `ClassName`, specified as any type. The class constructor argument list specifies the argument type.

Definitions

EDT

The EDT is the Event Dispatch Thread, used in Java.

Tips

- MATLAB calls methods on `JavaObj` from the EDT.
- Static methods on the specified class or Java object run on the MATLAB thread unless called using the `javaMethodEDT` function.

See Also

See Also

`import` | `javaMethodEDT` | `javaObject` | `methods`

Introduced in R2009a

javarmpath

Remove entries from dynamic Java class path

Syntax

```
javarmpath(dpath1,...,dpathN)
```

Description

`javarmpath(dpath1,...,dpathN)` removes one or more files or folders from the current dynamic class path.

Examples

Remove Folder from Dynamic Path

Preserve the state of the dynamic path on your system by first adding folders to the path, and then removing one of these folders.

Create a variable that points to the MATLAB examples folder. The path reflects the folder to your MATLAB installation.

```
expath = fullfile(matlabroot,'extern','examples')
```

```
expath =

C:\Program Files\MATLAB\R2012b\extern\examples
```

Add two folders to the path. The output displays these new folders on your existing path.

```
javaclasspath({...
   expath,...
   'http://www.example.com'})
javaclasspath('-dynamic')
```

```
  DYNAMIC JAVA PATH
```

```
C:\Program Files\MATLAB\R2012b\extern\examples
http://www.example.com
```

Remove one folder. The path no longer contains the `extern\examples` folder.

```
javarmpath(expath)
javaclasspath('-dynamic')
```

```
  DYNAMIC JAVA PATH

 http://www.example.com
```

Input Arguments

`dpath1,...,dpathN` — Folders or JAR files
string | character vector

Folders or JAR files, specified as strings or character vectors, to remove from path.

Data Types: `char`

Tips

- This command clears the definitions of all Java classes defined by files on the dynamic class path.

See Also

See Also

Functions
`clear` | `javaaddpath` | `javaclasspath`

Topics
"Java Class Path"

Introduced before R2006a

join

Combine strings, or merge two tables or timetables by rows using key variables

Syntax

```
newStr = join(str)
newStr = join(str,delimiter)
newStr = join(str,dim)
newStr = join(str,delimiter,dim)
```

```
tblC = join(tblA,tblB)
tblC = join(tblA,tblB,Name,Value)
[tblC,ib] = join( ___ )
```

Description

`newStr = join(str)` concatenates the text in the input array `str`, placing a space character between consecutive elements, and returns the result as `newStr`. The input array `str` can be a string array or a cell array of character vectors. `newStr` has the same data type as `str`.

- If `str` is a `1`-by-`N` or an `N`-by-`1` string array or cell array, then `newStr` is a string scalar or a cell array that contains one character vector.
- If `str` is an `M`-by-`N` string array, then `newStr` is an `M`-by-`1` string array or cell array.

For a string or cell array of any size, `join` concatenates elements along the last dimension of `str` with a size that does not equal `1`.

`newStr = join(str,delimiter)` combines the text in `str` and places the elements of `delimiter` between the elements of `str` instead of a space character.

If the `delimiter` argument is an array of different delimiters, and `str` has `N` elements along the dimension that is joined, then `delimiter` must have `N-1` elements along the same dimension. The other dimensions of `delimiter` must have either a size of `1` or the same size as the corresponding dimension of `str`.

`newStr = join(str,dim)` combines the elements in `str` along the dimension `dim`.

`newStr = join(str,delimiter,dim)` combines the elements in `str` along the dimension `dim` and places the elements of `delimiter` between the elements of `str`.

`tblC = join(tblA,tblB)` merges `tblA` and `tblB` by matching up rows, using all the variables with the same names as key variables. The key values must be common to both `tblA` and `tblB`, but can appear in different orders. `tblA` and `tblB` can be both tables, both timetables, or one of each.

- If `tblA` is a table, then `join` returns `tblC` as a table.
- If `tblA` is a timetable, then `join` returns `tblC` as a timetable.

`join` retains all the variables from `tblA` and appends the corresponding contents from the nonkey variables of `tblB`.

The row labels of `tblA` and `tblB` can be key variables. Row labels are the row names of a table, or the row times of a timetable.

`tblC = join(tblA,tblB,Name,Value)` joins the tables or timetables with additional options specified by one or more `Name,Value` pair arguments.

For example, you can specify which variables to use as key variables.

`[tblC,ib] = join( ___ )` also returns an index vector `ib` such that each element of `ib` identifies the row in `tblB` that corresponds to that row in `tblC`. You can use this syntax with any of the input arguments of the previous syntaxes for tables.

Examples

Concatenate Strings in String Array

Concatenate the strings in a string array. The `join` function concatenates the strings from `str` and places a space character between them. `join` concatenates along the second dimension because it is the last dimension with a size that does not equal one.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["John","Smith";
       "Mary","Jones";
       "Alice","White"]
```

```
str = 3×2 string array
    "John"      "Smith"
    "Mary"      "Jones"
    "Alice"     "White"
```

Concatenate the strings using the `join` function. `join` concatenates the strings from `str` and places a space character between them. `join` concatenates along the second dimension because it is the last dimension with a size that does not equal one.

```
newStr = join(str)
```

```
newStr = 3×1 string array
    "John Smith"
    "Mary Jones"
    "Alice White"
```

Concatenate String Array with Delimiters

Concatenate the strings in a string array. Instead of spaces, insert different pieces of text between the strings in `str`.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["x","y","z";
       "a","b","c"]
```

```
str = 2×3 string array
    "x"     "y"     "z"
    "a"     "b"     "c"
```

Concatenate the strings with dashes between them.

```
newStr = join(str,"-")
```

```
newStr = 2×1 string array
    "x-y-z"
    "a-b-c"
```

Concatenate the strings with symbols that make the output strings represent equations. The `delimiters` argument must be a 2-by-2 array because `str` is a 2-by-3 array.

```
delimiters = [" + "," = ";
              " - "," = "];
newStr = join(str,delimiters)
```

```
newStr = 2×1 string array
    "x + y = z"
    "a - b = c"
```

Combine String Array Along Different Dimension

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["John","Smith";
       "Mary","Jones";
       "Alice","White"]
```

```
str = 3×2 string array
    "John"     "Smith"
    "Mary"     "Jones"
    "Alice"    "White"
```

Combine the strings in `str` along the first dimension. By default, the `join` function combines strings along the last dimension with a size that does not equal one. To combine the strings along the first dimension, specify it as an additional input argument.

```
newStr = join(str,1)
```

```
newStr = 1×2 string array
    "John Mary Alice"    "Smith Jones White"
```

Append Values from One Table to Another

Create a table, A.

```
A = table({'John','Jane','Jim','Jerry','Jill'}',[1;2;1;2;1],...
    'VariableNames',{'Employee' 'Department'})
```

```
A = 5×2 table
    Employee    Department
    ________    __________
```

```
    'John'      1
    'Jane'      2
    'Jim'       1
    'Jerry'     2
    'Jill'      1
```

Create a table, B, with a variable in common with A.

```
B = table([1 2]',{'Mary' 'Mike'}',...
    'VariableNames',{'Department' 'Manager'})
```

```
B = 2×2 table
    Department    Manager
    __________    _______

    1             'Mary'
    2             'Mike'
```

Create a new table, C, containing data from tables A and B. Use the `join` function to repeat and append `Manager` data from table B to the data from table A based on the key variable, `Department`.

```
C = join(A,B)
```

```
C = 5×3 table
    Employee    Department    Manager
    ________    __________    _______

    'John'      1             'Mary'
    'Jane'      2             'Mike'
    'Jim'       1             'Mary'
    'Jerry'     2             'Mike'
    'Jill'      1             'Mary'
```

Merge Tables with One Variable in Common

Create a table, A.

```
A = table([5;12;23;2;6],...
    {'cereal';'pizza';'salmon';'cookies';'pizza'},...
    'VariableNames',{'Age','FavoriteFood'},...
```

```
    'RowNames',{'Amy','Bobby','Holly','Harry','Sally'})
```

```
A = 5×2 table
              Age    FavoriteFood
              ___    ____________

    Amy        5     'cereal'
    Bobby     12     'pizza'
    Holly     23     'salmon'
    Harry      2     'cookies'
    Sally      6     'pizza'
```

Create a table, B, with one variable in common with A.

```
B = table({'cereal';'cookies';'pizza';'salmon';'cake'},...
    [110;160;140;367;243],...
    {'B';'D';'B-';'A';'C-'},...
    'VariableNames',{'FavoriteFood','Calories','NutritionGrade'})
```

```
B = 5×3 table
    FavoriteFood    Calories    NutritionGrade
    ____________    ________    ______________

    'cereal'        110         'B'
    'cookies'       160         'D'
    'pizza'         140         'B-'
    'salmon'        367         'A'
    'cake'          243         'C-'
```

Create a new table, C, with data from tables A and B. Use `FavoriteFood` as a key variable to the `join` function.

```
C = join(A,B)
```

```
C = 5×4 table
              Age    FavoriteFood    Calories    NutritionGrade
              ___    ____________    ________    ______________

    Amy        5     'cereal'        110         'B'
    Bobby     12     'pizza'         140         'B-'
    Holly     23     'salmon'        367         'A'
    Harry      2     'cookies'       160         'D'
    Sally      6     'pizza'         140         'B-'
```

Table C does not include information from the last row of table B about 'cake' since there is no corresponding entry in table A.

Merge Tables by Specifying One Key Variable

Create a table, A.

```
A = table([10;4;2;3;7],[5;4;9;6;1],[10;3;8;8;4])
```

```
A = 5×3 table
    Var1    Var2    Var3
    ____    ____    ____

    10      5       10
     4      4        3
     2      9        8
     3      6        8
     7      1        4
```

Create a table, B, giving Var2 the same contents as Var2 from table A.

```
B = table([6;1;1;6;8],[5;4;9;6;1])
```

```
B = 5×2 table
    Var1    Var2
    ____    ____

    6       5
    1       4
    1       9
    6       6
    8       1
```

Create a new table, C, containing data from tables A and B. Use Var2 in tables A and B as the key variable to the join function.

```
C = join(A,B,'Keys','Var2')
```

```
C = 5×4 table
    Var1_A    Var2    Var3    Var1_B
    ______    ____    ____    ______
```

```
    10          5          10         6
     4          4           3         1
     2          9           8         1
     3          6           8         6
     7          1           4         8
```

`join` adds a unique suffix to the nonkey variable `Var1` to distinguish the data from tables `A` and `B`.

Keep One Copy of Nonkey Variables

Create a new table with data from tables `A` and `B`. If any nonkey variables have the same name in both tables, keep only the copy from table `A`.

Create a table, `A`.

```
A = table([10;4;2;3;7],[5;4;9;6;1])
```

```
A = 5×2 table
    Var1    Var2
    ____    ____

    10      5
     4      4
     2      9
     3      6
     7      1
```

Create a table, `B`, giving `Var2` the same contents as `Var2` from table `A`.

```
B = table([6;1;1;6;8],[5;4;9;6;1],[10;3;8;8;4])
```

```
B = 5×3 table
    Var1    Var2    Var3
    ____    ____    ____

    6       5       10
    1       4        3
    1       9        8
    6       6        8
    8       1        4
```

Create a new table, C, with data from tables A and B. Use Var2 as a key variable to the join function and keep only the copy of Var1 from table A.

```
C = join(A,B,'Keys','Var2','KeepOneCopy','Var1')
```

```
C = 5×3 table
    Var1    Var2    Var3
    ____    ____    ____

    10      5       10
     4      4        3
     2      9        8
     3      6        8
     7      1        4
```

C does not contain the Var1 data from table B.

Merge Tables Using Row Names as Keys

Create a table, A.

```
A = table(['M';'M';'F';'F';'F'],[38;43;38;40;49],...
    'VariableNames',{'Gender' 'Age'},...
    'RowNames',{'Smith' 'Johnson' 'Williams' 'Jones' 'Brown'})
```

```
A = 5×2 table
                Gender    Age
                ______    ___

    Smith       M         38
    Johnson     M         43
    Williams    F         38
    Jones       F         40
    Brown       F         49
```

Create a table, B, such that there is a one-to-one correspondence between the rows of A and the rows of B.

```
B = table([64;69;67;71;64],...
    [119;163;133;176;131],...
    [122 80; 109 77; 117 75; 124 93; 125 83],...
```

```
    'VariableNames',{'Height' 'Weight' 'BloodPressure'},...
    'RowNames',{'Brown' 'Johnson' 'Jones' 'Smith' 'Williams'})
```

```
B = 5×3 table
                Height    Weight    BloodPressure
                ______    ______    _____________

    Brown       64        119       122      80
    Johnson     69        163       109      77
    Jones       67        133       117      75
    Smith       71        176       124      93
    Williams    64        131       125      83
```

Create a new table, C, with data from tables A and B. Use the row names as keys to the `join` function.

```
C = join(A,B,'Keys','RowNames')
```

```
C = 5×5 table
                Gender    Age    Height    Weight    BloodPressure
                ______    ___    ______    ______    _____________

    Smith       M         38     71        176       124      93
    Johnson     M         43     69        163       109      77
    Williams    F         38     64        131       125      83
    Jones       F         40     67        133       117      75
    Brown       F         49     64        119       122      80
```

The rows of C are in the same order as A.

Merge Tables Using Left and Right Keys

Create a table, A.

```
A = table([10;4;2;3;7],[5;4;9;6;1],[10;3;8;8;4])
```

```
A = 5×3 table
    Var1    Var2    Var3
    ____    ____    ____

    10      5       10
     4      4        3
     2      9        8
```

```
     3       6         8
     7       1         4
```

Create a table, B, giving Var2 the same contents as Var1 from table A, except for order.

```
B = table([6;1;1;6;8],[2;3;4;7;10])
```

```
B = 5×2 table
    Var1    Var2
    ____    ____

    6        2
    1        3
    1        4
    6        7
    8       10
```

Create a new table, C, containing data from tables A and B. Use Var1 from table A with Var2 from table B as key variables to the join function.

```
[C,ib] = join(A,B,'LeftKeys',1,'RightKeys',2)
```

```
C = 5×4 table
    Var1_A    Var2    Var3    Var1_B
    ______    ____    ____    ______

    10         5      10       8
     4         4       3       1
     2         9       8       6
     3         6       8       1
     7         1       4       6


ib =

     5
     3
     1
     2
     4
```

C is the horizontal concatenation of A and B(ib,2).

Merge Timetables

Create two timetables that have the same row times and traffic data.

```
Traffic = [0.8 0.9 0.1 0.7 0.9]';
Noise = [0 1 1.5 2 2.3]';
A = timetable(hours(1:5)',Traffic,Noise)
```

```
A = 5×2 timetable
    Time    Traffic    Noise
    ____    _______    _____

    1 hr    0.8          0
    2 hr    0.9          1
    3 hr    0.1        1.5
    4 hr    0.7          2
    5 hr    0.9        2.3
```

```
Distance = [0.88 0.86 0.91 0.9 0.86]';
B = timetable(hours(1:5)',Distance)
```

```
B = 5×1 timetable
    Time    Distance
    ____    ________

    1 hr    0.88
    2 hr    0.86
    3 hr    0.91
    4 hr     0.9
    5 hr    0.86
```

Merge the timetables. `join` uses the row times as the key variables.

```
C = join(A,B)
```

```
C = 5×3 timetable
    Time    Traffic    Noise    Distance
    ____    _______    _____    ________

    1 hr    0.8          0      0.88
    2 hr    0.9          1      0.86
    3 hr    0.1        1.5      0.91
    4 hr    0.7          2       0.9
    5 hr    0.9        2.3      0.86
```

Merge Timetable and Table

Create a timetable and a table.

```
Measurements = [0.13 0.22 0.31 0.42 0.53 0.57 0.67 0.81 0.90 1.00]';
Device = ['A';'B';'A';'B';'A';'B';'A';'B';'A';'B'];
A = timetable(seconds(1:10)',Measurements,Device)
```

```
A = 10×2 timetable
     Time     Measurements    Device
    ______    ____________    ______

     1 sec    0.13            A
     2 sec    0.22            B
     3 sec    0.31            A
     4 sec    0.42            B
     5 sec    0.53            A
     6 sec    0.57            B
     7 sec    0.67            A
     8 sec    0.81            B
     9 sec     0.9            A
    10 sec       1            B
```

```
Device = ['A';'B'];
Accuracy = [0.023;0.037];
B = table(Device,Accuracy)
```

```
B = 2×2 table
    Device    Accuracy
    ______    ________

    A         0.023
    B         0.037
```

Merge the timetable and table. `Device` is the key variable because both `A` and `B` have a variable with that name. `C` is a timetable.

```
C = join(A,B)
```

```
C = 10×3 timetable
     Time     Measurements    Device    Accuracy
```

```
_____    ____________    ______    ________

 1 sec    0.13            A         0.023
 2 sec    0.22            B         0.037
 3 sec    0.31            A         0.023
 4 sec    0.42            B         0.037
 5 sec    0.53            A         0.023
 6 sec    0.57            B         0.037
 7 sec    0.67            A         0.023
 8 sec    0.81            B         0.037
 9 sec     0.9            A         0.023
10 sec       1            B         0.037
```

Input Arguments

`str` — Input text

string array | cell array of character vectors

Input text, specified as a string array or a cell array of character vectors.

`delimiter` — Delimiting characters for joining strings

`' '` (default) | character vector | cell array of character vectors | string array

Delimiting characters for joining strings, specified as a character vector, a cell array of character vectors, or a string array. `join` forms the output string array by combining string elements with delimiters between them.

`join` inserts all characters in `delimiter` as literal text, including escaped character sequences.

`dim` — Dimension along which to join strings

positive integer scalar

Dimension along which to join strings, specified as a positive integer scalar. If `dim` is not specified, then the default is the last dimension with a size that does not equal `1`.

`tblA,tblB` — Input tables

tables | timetables

Input tables, specified as tables, timetables, or as one of each. For all key variables, each row of `tblA` must match exactly one row in `tblB`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Keys',2` uses the second variable in `tblA` and the second variable in `tblB` as key variables.

`'Keys'` — Variables to use as keys

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector | `'RowNames'`

Variables to use as keys, specified as the comma-separated pair consisting of `'Keys'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, logical vector, or `'RowNames'`.

You cannot use the `'Keys'` name-value pair argument with the `'LeftKeys'` and `'RightKeys'` name-value pair arguments.

Row labels can be key variables. Row labels are the row names of a table or the row times of a timetable. You can specify `'Keys'` as the row labels only, as one or more variables in `tblA` and `tblB`, or as row labels and variables together.

If you specify the value `'RowNames'`, then `join` uses the row names of `tblA` and row names of `tblB` as keys. In this case, there must be a row in `tblB` for every row in `tblA`. You cannot specify `'RowNames'` when `tblA` is a timetable.

Example: `'Keys',[1 3]` uses the first and third variables from `tblA` and `tblB` as a key variables.

`'LeftKeys'` — Variables to use as keys in `tblA`

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables to use as keys in `tblA`, specified as the comma-separated pair consisting of `'LeftKeys'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You must use the `'LeftKeys'` name-value pair argument in conjunction with the `'RightKeys'` name-value pair argument. `'LeftKeys'` and `'RightKeys'` both must specify the same number of key variables. `join` pairs key values based on their order.

Row labels can be key variables. Row labels are the row names of a table or the row times of a timetable. You can specify `'LeftKeys'` as the row labels of `tblA`, as one or more variables in `tblA`, or as row labels and variables together.

Example: `'LeftKeys',1` uses only the first variable in `tblA` as a key variable.

`'RightKeys'` — Variables to use as keys in `tblB`

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables to use as keys in `tblB`, specified as the comma-separated pair consisting of `'RightKeys'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You must use the `'RightKeys'` name-value pair argument in conjunction with the `'LeftKeys'` name-value pair argument. `'LeftKeys'` and `'RightKeys'` both must specify the same number of key variables. `join` pairs values in `tblA` and `tblB` based on their order.

Row labels can be key variables. Row labels are the row names of a table or the row times of a timetable. You can specify `'RightKeys'` as the row labels of `tblB`, as one or more variables in `tblB`, or as row labels and variables together.

Example: `'RightKeys',3` uses only the third variable in `tblB` as a key variable.

`'LeftVariables'` — Variables from `tblA` to include in `tblC`

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables from `tblA` to include in `tblC`, specified as the comma-separated pair consisting of `'LeftVariables'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You can use `'LeftVariables'` to include or exclude key variables, as well as nonkey variables from the output, `tblC`. However, you cannot include row names or row times from `tblA`, because they are not variables.

By default, `join` includes all variables from `tblA`.

`'RightVariables'` — Variables from `tblB` to include in `tblC`

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables from `tblB` to include in `tblC`, specified as the comma-separated pair consisting of `'RightVariables'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You can use `'RightVariables'` to include or exclude key variables, as well as nonkey variables from the output, `tblC`. However, you cannot include row names or row times from `tblB`, because they are not variables.

By default, `join` includes all the variables from `tblB` except the key variables.

`'KeepOneCopy'` — Variables for which `join` retains only the copy from `tblA`
character vector | cell array of character vectors

Variables for which `join` retains only the copy from `tblA`, specified as the comma-separated pair consisting of `'KeepOneCopy'` and a character vector or a cell array of character vectors that specify variable names.

Key variables appear once in `tblC`, but if nonkey variables with identical names occur in `tblA` and `tblB`, then `join` retains both copies in `tblC` by default. Use the `'KeepOneCopy'` name-value pair to retain only the copy from `tblA`.

Example: `'KeepOneCopy',Var2` keeps only the copy from `tblA` of the nonkey variable `Var2`.

Output Arguments

`newStr` — Output text
string array | cell array of character vectors

Output text, returned as a string array or a cell array of character vectors. `newStr` has a size of `1` along the dimension being joined.

`newStr` has the same data type as the input text.

`tblC` — Merged data from `tblA` and `tblB`
table | timetable

Merged data from `tblA` and `tblB`, returned as a table or a timetable. The table, `tblC`, contains one row for each row in `tblA`, appearing in the same order.

`join` creates `tblC` by horizontally concatenating `tblA(:,LeftVars)` and `tblB(ib,RightVars)`. By default, `LeftVars` is all the variables of `tblA`, and

`RightVars` is all the nonkey variables from `tblB`. Otherwise, `LefttVars` consists of the variables specified by the `'LeftVariables'` name-value pair argument, and `RightVars` consists of the variables specified by the `'RightVariables'` name-value pair argument.

If `tblA` and `tblB` contain nonkey variables with the same name, `join` adds a unique suffix to the corresponding variable names in `tblC`, unless you specify the `'KeepOneCopy'` name-value pair argument.

If `tblA` is a table, then `tblC` is also a table. If `tblA` is a timetable and `tblB` is either a timetable or a table, then `tblC` is a timetable.

You can store additional metadata such as descriptions, variable units, variable names, and row names in `tblC`. For more information, see Table Properties or Timetable Properties.

`ib` — Index to `tblB`
column vector

Index to `tblB`, returned as a column vector. Each element of `ib` identifies the row in `tblB` that corresponds to that row in the output table or timetable, `tblC`.

Definitions

Key Variable

Variable used to match and combine data between the input tables, `tblA` and `tblB`.

Key Value

Entry in a key variable of `tblA`.

Algorithms

The `join` function first finds one or more key variables. Then, `join` uses the key variables to find the row in input table `tblB` that matches each row in input table `tblA`, and combines those rows to create a row in output table `tblC`.

- If there is a one-to-one mapping between key values in `tblA` and `tblB`, then `join` sorts the data in `tblB` and appends it to table `tblA`.
- If there is a many-to-one mapping between key values in `tblA` and `tblB`, then `join` sorts and repeats the data in `tblB` before appending it to table `tblA`.
- If there is data in a key variable of `tblB` that does not map to a key value in `tblA`, then `join` does not include that data in the output table, `tblC`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- You cannot join two tall inputs. `join` can join together:
  - A tall table with a regular table.
  - A tall timetable with a regular table or timetable.
- The two-output syntax `[C,iB] = join(...)` is not supported.
- Unlike with tall tables, joining tall string arrays has no limitations.

For more information, see “Tall Arrays”.

See Also

See Also

`compose` | `innerjoin` | `newline` | `outerjoin` | `regexp` | `split` | `splitlines` | `sprintf` | `string`

Introduced in R2013b

juliandate

Convert MATLAB datetime to Julian date

Syntax

```
d = juliandate(t)
d = juliandate(t,dateType)
```

Description

`d = juliandate(t)` returns the "Julian dates" on page 1-6231 equivalent to the `datetime` values in `t`.

- If the time zone of `t` is not specified, then `juliandate` treats the times in `t` as UTC times. This interpretation might differ from your treatment of "unzoned" `datetime` arrays in other contexts. For example, you might think of `datetime('now')` as returning your local time. However, `juliandate` interprets it as a UTC time.
- If the time zone of `t` is specified, then `juliandate` uses the offset for the time zone to compute Julian dates with respect to UTC.
- `juliandate` ignores leap seconds unless the time zone of `t` is `UTCLeapSeconds`.

The best practice is to specify the time zone of `t` before calling `juliandate`.

`d = juliandate(t,dateType)` returns the type of Julian dates specified by `dateType`. For example, you can convert datetime values to modified Julian dates.

Examples

Convert Datetime Array to Julian Dates

Create `datetime` values and convert them to the equivalent Julian dates. Show the differences in Julian dates between zoned and unzoned `datetime` values. The best practice is to specify a time zone for a `datetime` array before calling `juliandate`.

Create a `datetime` array and specify its time zone.

```
t1 = datetime('2016-07-29 10:05:24') + calmonths(1:3);
t1.TimeZone = 'America/New_York'
```

```
t1 = 1×3 datetime array
   29-Aug-2016 10:05:24   29-Sep-2016 10:05:24   29-Oct-2016 10:05:24
```

Convert `t1` to the equivalent Julian dates. `juliandate` accounts for the time zone offset when it computes Julian dates.

```
format longG
jd1 = juliandate(t1)
```

```
jd1 =
          2457630.08708333          2457661.08708333          2457691.08708333
```

Create a `datetime` array with the same values as `t1`, but with no time zone. Convert it to the equivalent Julian dates. `juliandate` treats the times in `t2` as UTC times, with no time zone offset.

```
t2 = datetime('2016-07-29 10:05:24') + calmonths(1:3);
jd2 = juliandate(t2)
```

```
jd2 =
          2457629.92041667          2457660.92041667          2457690.92041667
```

Show the differences between `jd2` and `jd1`. The differences are equal to the time offset, in days, between UTC and the time zone of `jd1`.

```
jd2 - jd1
```

```
ans =
        -0.166666666511446        -0.166666666511446        -0.166666666511446
```

- "Convert Date and Time to Julian Date or POSIX Time"

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

`dateType` — Type of Julian date values
`'juliandate'` (default) | `'modifiedjuliandate'`

Type of Julian date values, specified as either `'juliandate'` or `'modifiedjuliandate'`.

- If `dateType` is `'juliandate'`, then `juliandate` converts the datetime values in `t` to the equivalent Julian dates. A Julian date is the number of days and fractional days since noon on November 24, 4714 BCE in the proleptic Gregorian calendar, or January 1, 4713 BCE in the proleptic Julian calendar.
- If `dateType` is `'modifiedjuliandate'`, then `juliandate` converts the datetime values in `t` to the equivalent modified Julian dates. A modified Julian date is the number of days and fractional days since November 17, 1858 00:00:00.

Definitions

Julian dates

A Julian date is the number of days and fractional days since noon on November 24, 4714 BCE in the proleptic Gregorian calendar, or January 1, 4713 BCE in the proleptic Julian calendar.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`datenum` | `datetime` | `exceltime` | `posixtime` | `yyyymmdd`

Topics

"Convert Date and Time to Julian Date or POSIX Time"

Introduced in R2014b

keyboard

Input from keyboard

Syntax

```
keyboard
```

Description

`keyboard` pauses execution of a running program and gives control to the keyboard. Place the `keyboard` function in a program at the location where you want MATLAB to pause. When the program pauses, the prompt in the Command Window changes to `K>>`, indicating that MATLAB is in debug mode. You then can view or change the values of variables to see if the new values produce expected results.

The `keyboard` function is useful for debugging your functions.

Examples

Modify Variables While Debugging

Use the `keyboard` command to pause execution of a program and modify a variable before continuing.

Create a file, `buggy.m`, containing these statements.

```
function z = buggy(x)
n = length(x);
keyboard
z = (1:n)./x;
```

Run `buggy.m`. MATLAB pauses at line 3, where the `keyboard` command is located.

```
buggy(5)
```

Multiply the variable `x` by 2 and continue running the program. MATLAB executes the rest of the program using the new value of `x`.

```
x = x * 2
dbcont
```

Tips

- To terminate debug mode and continue execution, use the `dbcont` command.
- To terminate debug mode and exit the file without completing execution, use the `dbquit` command.

See Also

See Also

`dbcont` | `dbquit` | `dbstop` | `input`

Introduced before R2006a

keys

Class: containers.Map
Package: containers

Identify keys of `containers.Map` object

Syntax

```
keySet = keys(mapObj)
```

Description

`keySet = keys(mapObj)` returns cell array `keySet`, which contains all of the keys in `mapObj`.

Input Arguments

`mapObj`

Object of class containers.Map.

Output Arguments

`keySet`

1-by-`n` cell array, where `n` is the number of keys in `mapObj`.

Examples

Get the Keys in a Map

Create a map, and view the keys in the map:

```
myKeys = {'a','b','c'};
myValues = [1,2,3];
mapObj = containers.Map(myKeys,myValues);

keySet = keys(mapObj)
```

This code returns 1-by-3 cell array `keySet`:

```
keySet =

    'a'    'b'    'c'
```

See Also

isKey | values | containers.Map | remove

kron

Kronecker tensor product

Syntax

```
K = kron(A,B)
```

Description

`K = kron(A,B)` returns the Kronecker tensor product of matrices `A` and `B`. If `A` is an `m`-by-`n` matrix and `B` is a `p`-by-`q` matrix, then `kron(A,B)` is an `m*p`-by-`n*q` matrix formed by taking all possible products between the elements of `A` and the matrix `B`.

Examples

Block Diagonal Matrix

Create a block diagonal matrix.

Create a 4-by-4 identity matrix and a 2-by-2 matrix that you want to be repeated along the diagonal.

```
A = eye(4);
B = [1 -1;-1 1];
```

Use `kron` to find the Kronecker tensor product.

```
K = kron(A,B)
```

```
K =

     1    -1     0     0     0     0     0     0
    -1     1     0     0     0     0     0     0
     0     0     1    -1     0     0     0     0
     0     0    -1     1     0     0     0     0
     0     0     0     0     1    -1     0     0
     0     0     0     0    -1     1     0     0
```

```
     0     0     0     0     0     0     1    -1
     0     0     0     0     0     0    -1     1
```

The result is an 8-by-8 block diagonal matrix.

Repeat Matrix Elements

Expand the size of a matrix by repeating elements.

Create a 2-by-2 matrix of ones and a 2-by-3 matrix whose elements you want to repeat.

```
A = [1 2 3; 4 5 6];
B = ones(2);
```

Calculate the Kronecker tensor product using `kron`.

```
K = kron(A,B)
```

```
K =

     1     1     2     2     3     3
     1     1     2     2     3     3
     4     4     5     5     6     6
     4     4     5     5     6     6
```

The result is a 4-by-6 block matrix.

Sparse Laplacian Operator Matrix

This example visualizes a sparse Laplacian operator matrix.

The matrix representation of the discrete Laplacian operator on a two-dimensional, `n`-by-`n` grid is a `n*n`-by- `n*n` sparse matrix. There are at most five nonzero elements in each row or column. You can generate the matrix as the Kronecker product of one-dimensional difference operators. In this example `n = 5`.

```
n = 5;
I = speye(n,n);
E = sparse(2:n,1:n-1,1,n,n);
D = E+E'-2*I;
A = kron(D,I)+kron(I,D);
```

Visualize the sparsity pattern with `spy`.

```
spy(A,'k')
```

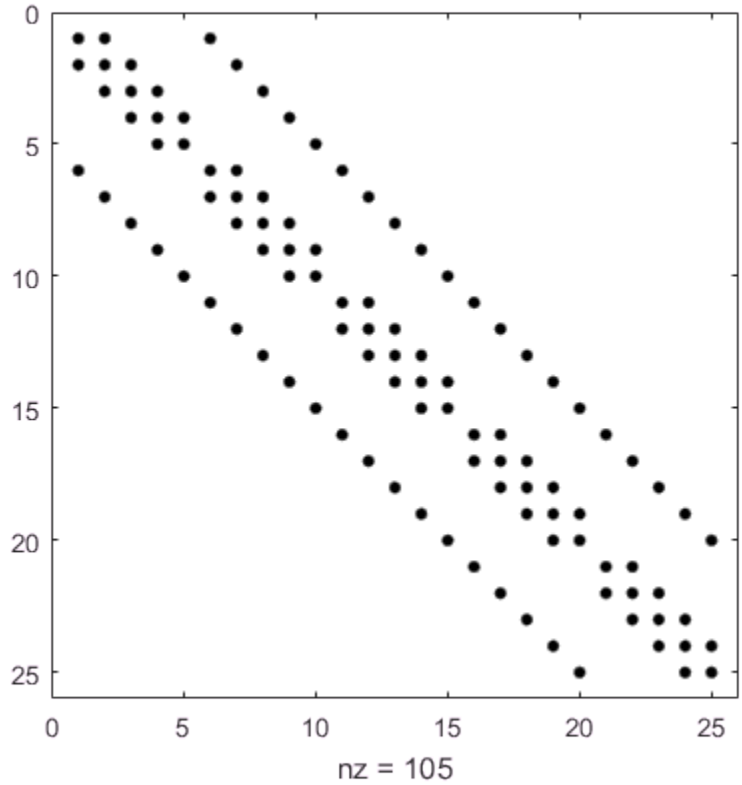

Input Arguments

A,B — Input matrices

scalars | vectors | matrices

Input matrices, specified as scalars, vectors, or matrices. If either A or B is sparse, then `kron` multiplies only nonzero elements and the result is also sparse.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

Definitions

Kronecker Tensor Product

If `A` is an `m`-by-`n` matrix and `B` is a `p`-by-`q` matrix, then the Kronecker tensor product of `A` and `B` is a large matrix formed by multiplying `B` by each element of `A`

$$A \otimes B = \begin{bmatrix} a_{11}B & a_{12}B & \cdots & a_{1n}B \\ a_{21}B & a_{22}B & \cdots & a_{2n}B \\ \vdots & \vdots & \ddots & \vdots \\ a_{m1}B & a_{m2}B & \cdots & a_{mn}B \end{bmatrix}.$$

For example, two simple 2-by-2 matrices produce

$$A = \begin{bmatrix} 1 & -2 \\ -1 & 0 \end{bmatrix}, \quad B = \begin{bmatrix} 4 & -3 \\ 2 & 3 \end{bmatrix}$$

$$A \otimes B = \begin{bmatrix} 1 \cdot 4 & 1 \cdot -3 & -2 \cdot 4 & -2 \cdot -3 \\ 1 \cdot 2 & 1 \cdot 3 & -2 \cdot 2 & -2 \cdot 3 \\ -1 \cdot 4 & -1 \cdot -3 & 0 \cdot 4 & 0 \cdot -3 \\ -1 \cdot 2 & -1 \cdot 3 & 0 \cdot 2 & 0 \cdot 3 \end{bmatrix} = \begin{bmatrix} 4 & -3 & -8 & 6 \\ 2 & 3 & -4 & -6 \\ -4 & 3 & 0 & 0 \\ -2 & -3 & 0 & 0 \end{bmatrix}.$$

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cross` | `dot` | `hankel` | `toeplitz`

Introduced before R2006a

KeyValueStore

Store key-value pairs for use with mapreduce

Description

The `mapreduce` function automatically creates a `KeyValueStore` object during execution and uses it to store key-value pairs added by the map and reduce functions. Although you never need to explicitly create a `KeyValueStore` object to use `mapreduce`, you do need to use the `add` and `addmulti` object functions to interact with this object in the map and reduce functions.

Create Object

The `mapreduce` function automatically creates `KeyValueStore` objects during execution.

Object Functions

add	Add single key-value pair to KeyValueStore
addmulti	Add multiple key-value pairs to KeyValueStore

Examples

Add Key-Value Pair to KeyValueStore in Map Function

The following map function uses the `add` function to add key-value pairs one at a time to an intermediate `KeyValueStore` object (named `intermKVStore`).

```
function MeanDistMapFun(data, info, intermKVStore)
    distances = data.Distance(~isnan(data.Distance));
    sumLenKey = 'sumAndLength';
    sumLenValue = [sum(distances), length(distances)];
```

```
    add(intermKVStore, sumLenKey, sumLenValue);
end
```

Add Multiple Key-Value Pairs to KeyValueStore in Map Function

The following map function uses `addmulti` to add several key-value pairs to an intermediate `KeyValueStore` object (named `intermKVStore`). Note that this map function collects multiple keys in the `intermKeys` variable, and multiple values in the `intermVals` variable. This prepares a single call to `addmulti` to add all of the key-value pairs at once. It is a best practice to use a single call to `addmulti` rather than using `add` in a loop.

```
function meanArrivalDelayByDayMapper(data, ~, intermKVStore)
% Mapper function for the MeanByGroupMapReduceExample.

% Copyright 2014 The MathWorks, Inc.

% Data is an n-by-2 table: first column is the DayOfWeek and the second
% is the ArrDelay. Remove missing values first.
delays = data.ArrDelay;
day = data.DayOfWeek;
notNaN =~isnan(delays);
day = day(notNaN);
delays = delays(notNaN);

% find the unique days in this chunk
[intermKeys,~,idx] = unique(day, 'stable');

% group delays by idx and apply @grpstatsfun function to each group
intermVals = accumarray(idx,delays,size(intermKeys),@countsum);
addmulti(intermKVStore,intermKeys,intermVals);

function out = countsum(x)
n = length(x); % count
s = sum(x); % mean
out = {[n, s]};
```

See Also

See Also

`mapreduce`

Topics

"Getting Started with MapReduce"

Introduced in R2014b

lag

Time-shift data in timetable

Syntax

```
TT2 = lag(TT1)
TT2 = lag(TT1,n)
TT2 = lag(TT1,dt)
```

Description

`TT2 = lag(TT1)` shifts the data in each variable in `TT1` forward in time by one time step. A shift forward in time is a *lag*. The row times of `TT1` must be regular.

The timetables `TT1` and `TT2` have the same row times. When you shift the data in each variable forward, `lag` fills the first row of `TT2` with missing data indicators.

`TT2 = lag(TT1,n)` shifts data by `n` time steps. `n` must be an integer. If `n` is positive, then `lag` shifts the data forward in time (a *lag*). If `n` is negative, then `lag` shifts the data backward in time (a *lead*).

`TT2 = lag(TT1,dt)` shifts data by `dt`, a time interval. `dt` is either a duration or a calendar duration. `dt` must be a multiple of the regular time step of `TT1`.

Examples

Shift Timetable Data

Create a timetable with temperature data as the variable. Shift the data forward in time by one time step and compare it to the original timetable.

```
Time = datetime('2015-12-18 12:00:00') + days(1:5)';
Temp = [43 42.6 42.3 39.1 37.3]';
TT = timetable(Time,Temp)
```

```
TT = 5×1 timetable
```

```
            Time            Temp
    ____________________    ____

    19-Dec-2015 12:00:00      43
    20-Dec-2015 12:00:00    42.6
    21-Dec-2015 12:00:00    42.3
    22-Dec-2015 12:00:00    39.1
    23-Dec-2015 12:00:00    37.3
```

```
TT2 = lag(TT)
```

```
TT2 = 5×1 timetable
            Time            Temp
    ____________________    ____

    19-Dec-2015 12:00:00     NaN
    20-Dec-2015 12:00:00      43
    21-Dec-2015 12:00:00    42.6
    22-Dec-2015 12:00:00    42.3
    23-Dec-2015 12:00:00    39.1
```

Synchronize the two timetables for comparison. Since the timetables already have the same row times, `synchronize` renames the variables and horizontally concatenates them.

```
synchronize(TT,TT2)
```

```
ans = 5×2 timetable
            Time            Temp_TT    Temp_TT2
    ____________________    _______    ________

    19-Dec-2015 12:00:00      43         NaN
    20-Dec-2015 12:00:00    42.6          43
    21-Dec-2015 12:00:00    42.3        42.6
    22-Dec-2015 12:00:00    39.1        42.3
    23-Dec-2015 12:00:00    37.3        39.1
```

Shift Timetable Data by Multiple Time Steps

Create a timetable with temperature data as the variable. Shift the data in time by multiple time steps.

```
Time = datetime('2015-12-18 12:00:00') + days(1:5)';
Temp = [43 42.6 42.3 39.1 37.3]';
TT = timetable(Time,Temp)
```

```
TT = 5×1 timetable
            Time            Temp
    ____________________    ____

    19-Dec-2015 12:00:00      43
    20-Dec-2015 12:00:00    42.6
    21-Dec-2015 12:00:00    42.3
    22-Dec-2015 12:00:00    39.1
    23-Dec-2015 12:00:00    37.3
```

Shift the data forward two time steps.

```
TT2 = lag(TT,2)
```

```
TT2 = 5×1 timetable
            Time            Temp
    ____________________    ____

    19-Dec-2015 12:00:00     NaN
    20-Dec-2015 12:00:00     NaN
    21-Dec-2015 12:00:00      43
    22-Dec-2015 12:00:00    42.6
    23-Dec-2015 12:00:00    42.3
```

Shift the data backward by three time steps.

```
TT2 = lag(TT,-3)
```

```
TT2 = 5×1 timetable
            Time            Temp
    ____________________    ____

    19-Dec-2015 12:00:00    39.1
    20-Dec-2015 12:00:00    37.3
    21-Dec-2015 12:00:00     NaN
    22-Dec-2015 12:00:00     NaN
    23-Dec-2015 12:00:00     NaN
```

Shift Timetable Data by Time Interval

Create a timetable with temperature data as the variable. Shift the data in time by two calendar months.

```
Time = datetime('2015-12-01 12:00:00') + calmonths(1:5)';
Temp = [43 37 35 39 45]';
TT = timetable(Time,Temp)
```

```
TT = 5×1 timetable
            Time                Temp
    ____________________        ____

    01-Jan-2016 12:00:00        43
    01-Feb-2016 12:00:00        37
    01-Mar-2016 12:00:00        35
    01-Apr-2016 12:00:00        39
    01-May-2016 12:00:00        45
```

```
TT2 = lag(TT,calmonths(2))
```

```
TT2 = 5×1 timetable
            Time                Temp
    ____________________        ____

    01-Jan-2016 12:00:00        NaN
    01-Feb-2016 12:00:00        NaN
    01-Mar-2016 12:00:00         43
    01-Apr-2016 12:00:00         37
    01-May-2016 12:00:00         35
```

- “Create Timetables”
- “Clean Timetable with Missing, Duplicate, or Nonuniform Times”
- “Select Timetable Data by Row Time and Variable Type”

Input Arguments

TT1 — Input timetable
timetable

Input timetable.

n — Number of time steps to shift data in regular timetable
integer

Number of time steps to shift the data in a regular timetable, specified as an integer.

dt — Time interval to shift data in regular timetable
duration | calendar duration

Time interval to shift the data in a regular timetable, specified as a duration or calendar duration.

See Also

See Also
`horzcat` | `innerjoin` | `outerjoin` | `retime` | `synchronize` | `vertcat`

Topics
"Create Timetables"
"Clean Timetable with Missing, Duplicate, or Nonuniform Times"
"Select Timetable Data by Row Time and Variable Type"

Introduced in R2016b

lastDirectory

Class: Tiff

Determine if current IFD is last in file

Syntax

```
tf = lastDirectory(tiffobj)
```

Description

`tf = lastDirectory(tiffobj)` returns `true` if the current image file directory (IFD) is the last IFD in the TIFF file; otherwise, `false`. If the file contains only one image, the current IFD is the last.

Examples

Determine if Current Directory is the Last Directory

Open a `Tiff` object and determine if the current directory is the last directory in the file.

```
t = Tiff('example.tif','r');
tf = lastDirectory(t)
```

```
tf = logical
   0
```

The current directory is not the last directory in the file.

Close the `Tiff` object.

```
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"

- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFLastDirectory` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.setDirectory

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

Chart Line Properties

Control chart line appearance and behavior

Description

Chart line properties control the appearance and behavior of a chart line object. By changing property values, you can modify certain aspects of the line.

Starting in R2014b, you can use dot notation to query and set properties.

```
p = plot(1:10);
c = p.Color;
p.Color = 'red';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Line

`LineStyle` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`Color` — Line color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`LineJoin` — Style of line corners

`'round'` (default) | `'miter'` | `'chamfer'`

Style of line corners, specified as `'round'`, `'miter'`, or `'chamfer'`. This table illustrates the appearance of the different values.

'round'	'miter'	'chamfer'

The appearance of the `'round'` option might look different if the `Renderer` property of the figure is set to `'opengl'` instead of `'painters'`.

`AlignVertexCenters` — Sharp vertical and horizontal lines

`'off'` (default) | `'on'`

Sharp vertical and horizontal lines, specified as `'off'` or `'on'`.

If the associated figure has a GraphicsSmoothing property set to `'on'` and a Renderer property set to `'opengl'`, then the figure applies a smoothing technique to plots. In some cases, this smoothing technique can cause vertical and horizontal lines to appear uneven in thickness or color. Use the `AlignVertexCenters` property to eliminate the uneven appearance.

- `'off'` — Do not sharpen vertical or horizontal lines. The lines might appear uneven in thickness or color.
- `'on'` — Sharpen vertical and horizontal lines to eliminate an uneven appearance.

Note: You must have a graphics card that supports this feature. To see if the feature is supported, type `opengl info`. If it is supported, then the returned fields contain the line `SupportsAlignVertexCenters: 1`.

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'*'` | `...`

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerIndices` — Indices of data points at which to display markers

`1:length(YData)` (default) | vector of positive integers | scalar positive integer

Indices of data points at which to display markers, specified as a vector of positive integers. If you do not specify the indices, then MATLAB displays a marker at every data point.

Note: To see the markers, you must also specify a marker symbol.

Example: `plot(x,y,'-o','MarkerIndices',[1 5 10])` displays a circle marker at the first, fifth, and tenth data points.

Example: `plot(x,y,'-x','MarkerIndices',1:3:length(y))` displays a cross marker every three data points.

Example: `plot(x,y,'Marker','square','MarkerIndices',5)` displays one square marker at the fifth data point.

`MarkerSize` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`MarkerFaceColor` — Marker fill color

`'none'` (default) | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which makes the interior invisible.
- `'auto'` — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Cartesian Coordinate Data

`XData` — x values

vector

x values, specified as a vector.

- For 2-D line plots, if you do not specify the *x* values, then MATLAB uses the indices of `YData` as the *x* values for the plot. `XData` and `YData` must have equal lengths.
- For 3-D line plots, if you do not specify the *x* values, then MATLAB uses the indices of `ZData` as the *x* values for the plot. `XData`, `YData`, and `ZData` must have equal lengths.

Example: `[1:10]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`XDataSource` — Variable linked to `XData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `XData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `XData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `XData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'x'`

`XDataMode` — Selection mode for `XData`

`'auto'` (default) | `'manual'`

Selection mode for `XData`, specified as one of these values:

- `'auto'` — Use the indices of the values in `YData` (or `ZData` for 3-D plots).
- `'manual'` — Use manually specified values. To specify the values, set the `XData` property or specify the input argument `X` to the plotting function.

`YData` — y values

vector

y values, specified as a vector. For 2-D line plots, `XData` and `YData` must have equal lengths. For 3-D line plots, `XData`, `YData`, and `ZData` must have equal lengths.

Example: `[1:10]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`YDataSource` — Variable linked to `YData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `YData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `YData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `YData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'y'`

`ZData` — z values

vector

z values for the 3-D line plot, specified as a vector. `XData`, `YData`, and `ZData` must have equal lengths.

Example: `[1:10]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ZDataSource` — Variable linked to `ZData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `ZData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `ZData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `ZData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'z'`

Polar Coordinate Data

`RData` — Radius values

vector

Radius values, specified as a vector. `ThetaData` and `RData` must be vectors of equal length.

This property applies only to lines in a polar axes.

`RDataSource` — Variable linked to `RData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `RData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `RData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `RData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

This property applies only to lines in a polar axes.

`ThetaData` — Angle values

vector

Angle values, specified as a vector. `ThetaData` and `RData` must be vectors of equal length.

This property applies only to lines in a polar axes.

`ThetaDataSource` — Variable linked to `ThetaData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `ThetaData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `RData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `ThetaData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

This property applies only to lines in a polar axes.

`ThetaDataMode` — Selection mode for `ThetaData`

`'auto'` (default) | `'manual'`

Selection mode for the `ThetaData` property value, specified as one of these values:

- `'auto'` — Automatically select the value.
- `'manual'` — Use the specified values. To specify the value, set the `ThetaData` property or specify the input argument `theta` to the plotting function.

This property applies only to lines in a polar axes.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects
`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`,

or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'line'`

This property is read-only.

Type of graphics object, returned as `'line'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent of chart line

axes object | polar axes object | group object | transform object

Parent of chart line, specified as an axes, polar axes, group, or transform object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Chart Line` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `Chart Line` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `Chart Line` object that has no color. The `HitTest` property determines if the `Chart Line` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Chart Line` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Chart Line` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Chart Line` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Chart Line` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback. Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Chart Line` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Chart Line` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`loglog` | `plot` | `plot3` | `polarplot` | `semilogx` | `semilogy`

Topics
"Access Property Values"
"Graphics Object Properties"

FunctionLine Properties

Control line chart appearance and behavior

Description

`FunctionLine` properties control the appearance and behavior of a `FunctionLine` object. By changing property values, you can modify certain aspects of the line chart. You can use dot notation to refer to a particular object and property:

```
fp = fplot(@(x) sin(x))
ls = fp.LineStyle
fp.LineStyle = ':'
```

Display

`Function` — Function to plot
function handle | anonymous function | symbolic expression | symbolic function

Function to plot, specified as a function handle, anonymous function, or a symbolic expression or function.

`XRange` — Plotting interval for *x* values
`[-5 5]` (default) | two-element vector of form `[xmin xmax]`

Plotting interval for *x* values, specified as a two-element vector of the form `[xmin xmax]`.

`XRangeMode` — Selection mode for `XRange`
`'auto'` (default) | `'manual'`

Selection mode for `XRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`. If axes limits are specified, follow the specified limits instead.
- `'manual'` — Use manually specified values. To specify the values, set the `XRange` property.

`MeshDensity` — Number of evaluation points
23 (default) | number

Number of evaluation points, specified as a number. The default is `23`. Because `FunctionLine` uses adaptive evaluation, the actual number of evaluation points is greater.

`ShowPoles` — Display asymptotes at poles

`'on'` (default) | `'off'`

Display asymptotes at poles, specified as `'on'` (default) or `'off'`. The asymptotes display as gray, dashed vertical lines. `fplot` displays asymptotes only with the `fplot(f)` syntax or variants, and not with the `fplot(xt,yt)` syntax.

Line

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`Color` — Line color

`[0 0 1]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'x'` | `...`

Marker symbol, specified as one of the markers listed in this table. By default, the line does not have markers. Specifying a marker symbol adds markers at selected points along the line.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square

Value	Description
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'+'`

Example: `'diamond'`

`MarkerSize` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`

Long Name	Short Name	RGB Triplet
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

MarkerFaceColor — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color specified in the MarkerEdgeColor property.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Cartesian Coordinate Data

`XData` — *x* values

vector

This property is read-only.

x values, specified as a vector. `XData`, `YData`, and `ZData` have equal lengths.

`YData` — *y* values

vector

This property is read-only.

y values, specified as a vector. `XData`, `YData`, and `ZData` have equal lengths.

`ZData` — *z* values

vector of zeros

This property is read-only.

z values, returned as a vector of zeros. `XData`, `YData`, and `ZData` have equal lengths.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

Identifiers

`Type` — Type of graphics object

`'functionline'`

This property is read-only.

Type of graphics object, returned as `'functionline'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text for legend label

autogenerated label (default) | character vector

Text for legend label, specified as a custom character vector. The default label is autogenerated from the `Function` property and the `texlabel` function. The legend does not appear until you call the `legend` function.

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `FunctionLine` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `FunctionLine` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `FunctionLine` object that has no color. The `HitTest` property determines if the `FunctionLine` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `FunctionLine` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `FunctionLine` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `FunctionLine` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `FunctionLine` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback. Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `FunctionLine` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `FunctionLine` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`fplot`

Topics
"Access Property Values"
"Graphics Object Properties"

ParameterizedFunctionLine Properties

Control parameterized line chart appearance and behavior

Description

`ParameterizedFunctionLine` properties control the appearance and behavior of a `ParameterizedFunctionLine` object. By changing property values, you can modify certain aspects of the line chart.

Display

`XFunction` — Parametric input for x-coordinates
function handle | anonymous function | symbolic expression | symbolic function

Parametric input for x-coordinates, specified as a function handle, anonymous function, or a symbolic expression or function.

`YFunction` — Parametric input for y-coordinates
function handle | anonymous function | symbolic expression | symbolic function

Parametric input for y-coordinates, specified as a function handle, anonymous function, or a symbolic expression or function.

`ZFunction` — Parametric input for z-coordinates
function handle | anonymous function | symbolic expression | symbolic function

Parametric input for z-coordinates, specified as a function handle, anonymous function, or a symbolic expression or function. For a 2-D plot, `ZFunction` is empty.

`TRange` — Range of values of parameter
[–5 5] (default) | vector of two numbers

Range of values of parameter, specified as a vector of two numbers. The default range is `[-5 5]`.

`TRangeMode` — Selection mode for `TRange`
`'auto'` (default) | `'manual'`

Selection mode for `TRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`.
- `'manual'` — Use manually specified values. To specify the values, set the `TRange` property or specify the input argument `[tmin tmax]` to the plotting function.

`MeshDensity` — Number of evaluation points

23 (default) | number

Number of evaluation points, specified as a number. The default is `23`. Because `ParameterizedFunctionLine` uses adaptive evaluation, the actual number of evaluation points is greater.

Line

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`Color` — Line color

`[0 0 1]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'*'` | `...`

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point

Value	Description
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerSize` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`

Long Name	Short Name	RGB Triplet
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

MarkerFaceColor — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color specified in the MarkerEdgeColor property.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Cartesian Coordinate Data

`XData` — x values

vector

This property is read-only.

x values, specified as a vector. `XData`, `YData`, and `ZData` have equal lengths.

`YData` — y values

vector

y values, specified as a vector. `XData`, `YData`, and `ZData` have equal lengths.

`ZData` — z values

vector

z values, specified as a vector. `XData`, `YData`, and `ZData` have equal lengths.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold`

`on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

Identifiers

`Type` — Type of graphics object

`'parameterizedfunctionline'`

This property is read-only.

Type of graphics object, returned as `'parameterizedfunctionline'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text for legend label

autogenerated label (default) | character vector

Text for legend label, specified as a custom character vector. The default label is autogenerated from the `Function` property and the `texlabel` function. The legend does not appear until you call the `legend` function.

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.

- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `ParameterizedFunctionLine` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `ParameterizedFunctionLine` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `ParameterizedFunctionLine` object that has no color. The `HitTest` property determines if the `ParameterizedFunctionLine` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `ParameterizedFunctionLine` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `ParameterizedFunctionLine` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `ParameterizedFunctionLine` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `ParameterizedFunctionLine` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `ParameterizedFunctionLine` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `ParameterizedFunctionLine` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`fplot` | `fplot3`

Topics

"Access Property Values"
"Graphics Object Properties"

FunctionContour Properties

Control contour chart appearance and behavior

Description

`FunctionContour` properties control the appearance and behavior of `FunctionContour` objects. By changing property values, you can modify certain aspects of the contour chart.

Display

`Function` — Function to plot
function handle | anonymous function | symbolic expression | symbolic function

Function to plot, specified as a function handle, anonymous function, or a symbolic expression or function.

`XRange` — Plotting interval for *x* values
`[-5 5]` (default) | two-element vector of form `[xmin xmax]`

Plotting interval for *x* values, specified as a two-element vector of the form `[xmin xmax]`.

`XRangeMode` — Selection mode for `XRange`
`'auto'` (default) | `'manual'`

Selection mode for `XRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`. If axes limits are specified, follow the specified limits instead.
- `'manual'` — Use manually specified values. To specify the values, set the `XRange` property.

`YRange` — Plotting interval for *y* values
`[-5 5]` (default) | two-element vector of form `[ymin ymax]`

Plotting interval for *y* values, specified as a two-element vector of the form `[ymin ymax]`.

`YRangeMode` — Selection mode for `YRange`

`'auto'` (default) | `'manual'`

Selection mode for `YRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`. If the axes limits are specified, follow the specified limits instead.
- `'manual'` — Use manually specified values. To specify the values, set the `YRange` property.

`MeshDensity` — Number of evaluation points per direction

71 (default) | number

Number of evaluation points per direction, specified as a number. The default is `71`. Because `fcontour` uses adaptive evaluation, the actual number of evaluation points is greater.

Example: `30`

Lines

`LineColor` — Color of contour lines

`'flat'` (default) | `'none'` | RGB triplet | character vector

Color of contour lines, specified as one of these values:

- `'flat'` — Use a different color for each contour line, determined by its contour value, the colormap, and the scaling of data values into the colormap. For more information on color scaling, see `caxis`.
- `'none'` — Do not draw the contour lines.
- RGB triplet or character vector of a color name — Use the same color for all contour lines.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`

Long Name	Short Name	RGB Triplet
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`LineStyle` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

Contour Levels

`LevelList` — Contour levels
vector of z values

Contour levels, specified as a vector of z values. By default, the `fcontour` function chooses values that span the range of values in the `ZData` property.

Setting this property sets the associated mode property to manual.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`LevelListMode` — Selection mode for `LevelList`

`'auto'` (default) | `'manual'`

Selection mode for the `LevelList`, specified as one of these values:

- `'auto'` — Determine the values based on the `ZData` values.
- `'manual'` — Use manually specified values. To specify the values, set the `LevelList` property. When the mode is `'manual'`, the `LevelList` values do not change if you change the `Function` property or the limits.

`LevelStep` — Spacing between contour lines

`0` (default) | scalar numeric value

Spacing between contour lines, specified as a scalar numeric value. For example, specify a value of `2` to draw contour lines at increments of 2. By default, `LevelStep` is determined by using the `ZData` values.

Setting this property sets the associated mode property to `'manual'`.

Example: `3.4`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`LevelStepMode` — Selection mode for `LevelStep`

`'auto'` (default) | `'manual'`

Selection mode for the `LevelStep`, specified as one of these values:

- `'auto'` — Determine the value based on the `ZData` values.
- `'manual'` — Use a manually specified value. To specify the value, set the `LevelStep` property. When the mode is `'manual'`, the value of `LevelStepMode` does not change when the `Function` property or the limits change.

Filled Contours

`Fill` — Fill between contour lines

`'off'` (default) | `'on'`

Fill between contour lines, specified as one of these values:

- `'off'` — Do not fill the spaces between contour lines with a color.
- `'on'` — Fill the spaces between contour lines with color.

Contour Matrix

`ContourMatrix` — Contour line definitions

[ ] (default) | two-row matrix

This property is read-only.

Contour line definitions, returned as a two-row matrix. Each contour line in the plot has an associated definition. If the plot has a total of `N` contour lines, then the contour matrix consists of `N` definitions:

```
C = [C(1) C(2)...C(k)...C(N)]
```

Each contour line definition follows this pattern:

```
C(k) = [level   x(1) x(2)...
        numxy   y(1) y(2)... ]
```

The first entry, `level`, indicates the contour level where the contour line is drawn. Beneath the contour level is the number of (*x*,*y*) vertices that define the contour line. The remaining columns contain the data for each of the vertices. If the first and last vertices are the same, then the contour line is a closed loop. If a particular contour level has multiple contour lines in the graph, then the matrix contains a separate definition for each line.

Example

Create a contour plot of `x^2 + y^2`. For demonstration purposes, use the lowest `MeshDensity` that results in a plot, which is `3`.

```
h = fcontour(@(x,y) x.^2+y.^2, 'MeshDensity', 3);
grid on
```

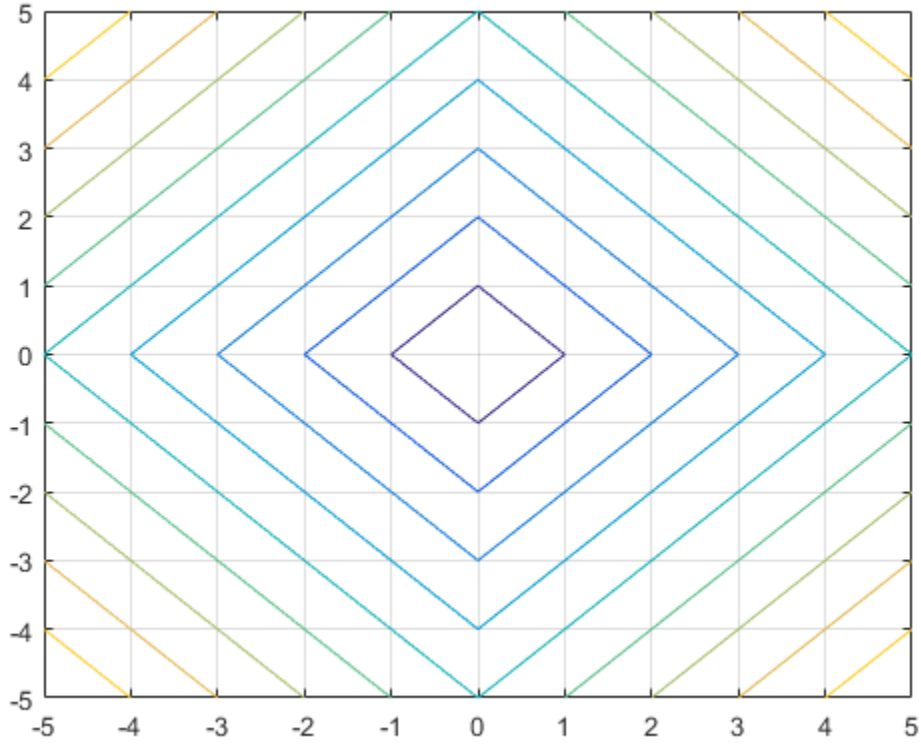

Access the contour matrix using the `ContourMatrix` property of the contour object (`h.ContourMatrix`). The contour matrix contains definitions for each of the seven contour lines. The circles in this matrix show the beginnings of the contour line definitions.

```
>> h.ContourMatrix
ans =
  Columns 1 through 13
    5     1     0    -1     0     1    10     2     0    -2     0     2    15
    5     0    -1     0     1     0     5     0    -2     0     2     0     5
  Columns 14 through 26
    3     0    -3     0     3    20     4     0    -4     0     4    25     5
    0    -3     0     3     0     5     0    -4     0     4     0     5     0
  Columns 27 through 39
    0    -5     0     5    30    -1    -5    30     5     1    30    -5    -1
   -5     0     5     0     2    -5    -1     2    -1    -5     2     1     5
  Columns 40 through 52
   30     1     5    35    -2    -5    35     5     2    35    -5    -2    35
    2     5     1     2    -5    -2     2    -2    -5     2     2     5     2
  Columns 53 through 65
    2     5    40    -3    -5    40     5     3    40    -5    -3    40     3
    5     2     2    -5    -3     2    -3    -5     2     3     5     2     5
  Columns 66 through 78
    5    45    -4    -5    45     5     4    45    -5    -4    45     4     5
    3     2    -5    -4     2    -4    -5     2     4     5     2     5     4
  Columns 79 through 90
   50    -5    -5    50     5     5    50    -5    -5    50     5     5
    2    -5    -5     2    -5    -5     2     5     5     2     5     5
```

The first definition in the matrix indicates that there is a contour line drawn at the `5` level , consisting of the five vertices `(1,0)`, `(0,-1)`, `(-1,0)`, `(0,1)`, and `(1,0)`. Since the first and last vertices are the same, the contour line is a closed loop. The last definition indicates that there is a point at the `50` level because the line starts and ends at the same point with no intervening points.

Data

`XData` — x values

matrix

This property is read-only.

x values specified as a matrix. `XData` is at least a 2-by-2 matrix. `size(XData)`, `size(YData)`, and `size(ZData)` are equal.

`YData` — y values

matrix

This property is read-only.

y values, specified as a matrix. `YData` is at least a 2-by-2 matrix. `size(XData)`, `size(YData)`, and `size(ZData)` are equal.

`ZData` — Data that defines surface to contour

matrix

This property is read-only.

Data that defines the surface to contour, specified as a matrix. `ZData` is at least a 2-by-2 matrix. `size(XData)`, `size(YData)`, and `size(ZData)` are equal.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

Identifiers

`Type` — Type of graphics object

`'functioncontour'`

This property is read-only.

Type of graphics object, returned as `'functioncontour'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with

a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

[ ] (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text for legend label

autogenerated label (default) | character vector

Text for legend label, specified as a custom character vector. The default label is autogenerated from the `Function` property and the `texlabel` function. The legend does not appear until you call the `legend` function.

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the `FunctionContour` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `FunctionContour` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `FunctionContour` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `FunctionContour` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `FunctionContour` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `FunctionContour` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `FunctionContour` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `FunctionContour` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`fcontour`

Topics
"Access Property Values"
"Graphics Object Properties"

FunctionSurface Properties

Control surface chart appearance and behavior

Description

`FunctionSurface` properties control the appearance and behavior of `FunctionSurface` objects. By changing property values, you can modify certain aspects of the surface chart. You can use dot notation to refer to a particular object and property:

```
fs = fsurf(@(x,y) sin(x)+cos(y))
alp = fs.FaceAlpha
fs.FaceAlpha = 0.6
```

Display

`Function` — Function to plot

function handle | anonymous function | symbolic expression | symbolic function

Function to plot, specified as a function handle, anonymous function, or a symbolic expression or function.

`XRange` — Plotting interval for *x* values

`[-5 5]` (default) | two-element vector of form `[xmin xmax]`

Plotting interval for *x* values, specified as a two-element vector of the form `[xmin xmax]`.

`XRangeMode` — Selection mode for `XRange`

`'auto'` (default) | `'manual'`

Selection mode for `XRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`. If axes limits are specified, follow the specified limits instead.
- `'manual'` — Use manually specified values. To specify the values, set the `XRange` property.

`YRange` — Plotting interval for *y* values

`[-5 5]` (default) | two-element vector of form `[ymin ymax]`

Plotting interval for *y* values, specified as a two-element vector of the form `[ymin ymax]`.

`YRangeMode` — Selection mode for `YRange`

`'auto'` (default) | `'manual'`

Selection mode for `YRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`. If the axes limits are specified, follow the specified limits instead.
- `'manual'` — Use manually specified values. To specify the values, set the `YRange` property.

`MeshDensity` — Number of evaluation points per direction

35 (default) | number

Number of evaluation points per direction, specified as a number. The default is `35`. Because `FunctionSurface` objects use adaptive evaluation, the actual number of evaluation points is greater.

Example: `100`

`ShowContours` — Display contour plot under plot

`'off'` (default) | `'on'`

Display contour plot under plot, specified as `'off'` (default) or `'on'`.

Faces

`FaceColor` — Face color

`'interp'` (default) | `'none'` | RGB triplet | character vector of color name

Face color, specified as one of these values:

- `'interp'` — Interpolate the face colors. Coloring is based on `ZData` values.
- `'none'` — Do not draw the faces.
- RGB triplet or character vector of a color name — Use the same color for all of the faces.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

FaceAlpha — Face transparency

1 (default) | scalar in range [0 1]

Face transparency, specified as a scalar in the range [0,1]. Use uniform transparency across all of the faces. A value of 1 is fully opaque and 0 is completely transparent. Values between 0 and 1 are semitransparent.

Edges

LineStyle — Line style

'-' (default) | '--' | ':' | '-.' | 'none'

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
'-'	Solid line	
'--'	Dashed line	
':'	Dotted line	
'-.'	Dash-dotted line	
'none'	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`EdgeColor` — Line color

`[0 0 0]` (default) | `'interp'` | `'none'` | RGB triplet or character vector

Line color, specified as one of these values:

- `'interp'` — Color the edges based on the `ZData` property values.
- `'none'` — Do not draw the edges.
- RGB triplet or a character vector of a color name — Use the same color for all the edges. The default RGB triplet value of `[0 0 0]` corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'x'` | `...`

Marker symbol, specified as one of the markers listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at the intersection points of mesh lines.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'+'`

Example: `'diamond'`

`MarkerSize` — Marker size

`6` (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color as specified in the `EdgeColor` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`MarkerFaceColor` — Marker fill color

`'none'` (default) | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which makes the interior invisible.
- `'auto'` — Use the same color specified in the `MarkerEdgeColor` property.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.3 0.2 0.1]

Example: 'green'

Ambient Lighting

AmbientStrength — Strength of ambient light

0.3 (default) | scalar in range [0,1]

Strength of ambient light, specified as a scalar value in the range [0,1]. Ambient light is a nondirectional light that illuminates the entire scene. There must be at least one visible light object in the axes for the ambient light to be visible.

The AmbientLightColor property for the axes sets the color of the ambient light. The color is the same for all objects in the axes.

Example: 0.5

Data Types: double

DiffuseStrength — Strength of diffuse light

0.6 (default) | scalar in range [0,1]

Strength of diffuse light, specified as a scalar value in the range [0,1]. Diffuse light is the nonspecular reflectance from light objects in the axes.

Example: 0.3

Data Types: double

`SpecularColorReflectance` — Color of specular reflections

1 (default) | scalar in range `[0,1]`

Color of specular reflections, specified as a scalar value in the range `[0,1]`. A value of `1` sets the color using only the color of the light source. A value of `0` sets the color using both the color of the object from which it reflects and the color of the light source. The Color property of the light contains the color of the light source. The proportions vary linearly for values in between.

Example: `0.5`

Data Types: `double`

`SpecularExponent` — Size of specular spot

10 (default) | scalar greater than or equal to 1

Size of specular spot, specified as a scalar value greater than or equal to 1. Most materials have exponents in the range `[5 20]`.

Example: `7`

Data Types: `double`

`SpecularStrength` — Strength of specular reflection

`0.9` (default) | scalar in range `[0,1]`

Strength of specular reflection, specified as a scalar value in the range `[0,1]`. Specular reflections are the bright spots on the surface from light objects in the axes.

Example: `0.3`

Data Types: `double`

Data

`XData` — x values

matrix

This property is read-only.

x values specified as a matrix. `XData` is at least a 2-by-2 matrix. `size(XData)`, `size(YData)`, and `size(ZData)` are equal.

`YData` — y values

matrix

This property is read-only.

y values, specified as a matrix. `YData` is at least a 2-by-2 matrix. `size(XData)`, `size(YData)`, and `size(ZData)` are equal.

`ZData` — Data that defines surface to contour

matrix

This property is read-only.

Data that defines the surface to contour, specified as a matrix. `ZData` is at least a 2-by-2 matrix. `size(XData)`, `size(YData)`, and `size(ZData)` are equal.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

Identifiers

`Type` — Type of graphics object

`'functionsurface'`

This property is read-only.

Type of graphics object, returned as `'functionsurface'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with

a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

[ ] (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text for legend label

autogenerated label (default) | character vector

Text for legend label, specified as a custom character vector. The default label is autogenerated from the `Function` property and the `texlabel` function. The legend does not appear until you call the `legend` function.

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `FunctionSurface` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `FunctionSurface` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `FunctionSurface` object that has no color. The `HitTest` property determines if the `FunctionSurface` object responds to the click or if an ancestor does.

- `'none'` — Cannot capture mouse clicks. Clicking the `FunctionSurface` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `FunctionSurface` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `FunctionSurface` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `FunctionSurface` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `FunctionSurface` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `FunctionSurface` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`fmesh` | `fsurf`

Topics
"Access Property Values"

"Graphics Object Properties"

ParameterizedFunctionSurface Properties

Control parameterized surface chart appearance and behavior

Description

`ParameterizedFunctionSurface` properties control the appearance and behavior of `ParameterizedFunctionSurface` objects. By changing property values, you can modify certain aspects of the surface chart.

Display

`XFunction` — Parametric input for x-coordinates
function handle | anonymous function | symbolic expression | symbolic function

Parametric input for x-coordinates, specified as a function handle, anonymous function, or a symbolic expression or function.

`YFunction` — Parametric input for y-coordinates
function handle | anonymous function | symbolic expression | symbolic function

Parametric input for y-coordinates, specified as a function handle, anonymous function, or a symbolic expression or function.

`ZFunction` — Parametric input for z-coordinates
function handle | anonymous function | symbolic expression | symbolic function

Parametric input for z-coordinates, specified as a function handle, anonymous function, or a symbolic expression or function. For a 2-D plot, `ZFunction` is empty.

`URange` — Range of first parameter
[–5 5] (default) | vector of two numbers

Range of the first parameter, specified as a vector of two numbers. The default range is `[-5 5]`.

`URangeMode` — Selection mode for `URange`
`'auto'` (default) | `'manual'`

Selection mode for `URange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`.
- `'manual'` — Use manually specified values. To specify the values, set the `URange` property or specify the input argument `[umin umax vmin vmax]` to the plotting function.

`VRange` — Range of second parameter

[–5 5] (default) | vector of two numbers

Range of the second parameter, specified as a vector of two numbers. The default range is `[-5 5]`.

`VRangeMode` — Selection mode for `VRange`

`'auto'` (default) | `'manual'`

Selection mode for `VRange`, specified as one of these values:

- `'auto'` — Use the default value `[-5 5]`.
- `'manual'` — Use manually specified values. To specify the values, set the `VRange` property or specify the input argument `[umin umax vmin vmax]` to the plotting function.

`MeshDensity` — Number of evaluation points per direction

35 (default) | number

Number of evaluation points per direction, specified as a number. The default is `35`. Because `ParameterizedFunctionSurface` objects use adaptive evaluation, the actual number of evaluation points is greater.

Example: `100`

`ShowContours` — Display contour plot under plot

`'off'` (default) | `'on'`

Display contour plot under plot, specified as `'off'` (default) or `'on'`.

Faces

`FaceColor` — Face color

`'interp'` (default) | `'none'` | RGB triplet | character vector of color name

Face color, specified as one of these values:

- `'interp'` — Interpolate the face colors. Coloring is based on `ZData` values.
- `'none'` — Do not draw the faces.
- RGB triplet or character vector of a color name — Use the same color for all of the faces.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`FaceAlpha` — Face transparency

1 (default) | scalar in range `[0 1]`

Face transparency, specified as a scalar in the range `[0,1]`. Use uniform transparency across all of the faces. A value of `1` is fully opaque and `0` is completely transparent. Values between `0` and `1` are semitransparent.

Edges

`EdgeColor` — Line color

`[0 0 0]` (default) | `'interp'` | `'none'` | RGB triplet or character vector

Line color, specified as one of these values:

- `'interp'` — Color the edges based on the `ZData` property values.
- `'none'` — Do not draw the edges.

- RGB triplet or a character vector of a color name — Use the same color for all the edges. The default RGB triplet value of `[0 0 0]` corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`EdgeColor` — Edge line color

`[0 0 0]` (default) | `'none'` | `'flat'` | `'interp'` | RGB triplet | character vector of color name

Edge line color, specified as one of the values listed here. The default color of `[0 0 0]` corresponds to black edges.

Value	Description
`'none'`	Do not draw the edges.
`'flat'`	Use a different color for each edge based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color value at the first vertex of each face (in the positive *x* and *y* directions) determines the color for the adjacent edges. You cannot use this value when the `EdgeAlpha` property is set to `'interp'`.
`'interp'`	Use interpolated coloring for each edge based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color varies across each edge by linearly interpolating the color values at the

Value	Description
	vertices. You cannot use this value when the `EdgeAlpha` property is set to `'flat'`. 
RGB triplet or color name	Use the specified color for all the edges. This option does not use the color values in the `CData` property. 

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`

Long Name	Short Name	RGB Triplet
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Markers

Marker — Marker symbol

'none' (default) | 'o' | '+' | '*' | '.' | 'x' | ...

Marker symbol, specified as one of the markers listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at the intersection points of mesh lines.

Value	Description
'o'	Circle
'+'	Plus sign
'*'	Asterisk
'.'	Point
'x'	Cross
'square' or 's'	Square
'diamond' or 'd'	Diamond
'^'	Upward-pointing triangle
'v'	Downward-pointing triangle
'>'	Right-pointing triangle
'<'	Left-pointing triangle
'pentagram' or 'p'	Five-pointed star (pentagram)
'hexagram' or 'h'	Six-pointed star (hexagram)
'none'	No markers

Example: '+'

Example: `'diamond'`

`MarkerSize` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color as specified in the `EdgeColor` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`MarkerFaceColor` — Marker fill color

`'none'` (default) | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which makes the interior invisible.
- `'auto'` — Use the same color specified in the `MarkerEdgeColor` property.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Ambient Lighting

`AmbientStrength` — Strength of ambient light

`0.3` (default) | scalar in range `[0,1]`

Strength of ambient light, specified as a scalar value in the range `[0,1]`. Ambient light is a nondirectional light that illuminates the entire scene. There must be at least one visible light object in the axes for the ambient light to be visible.

The AmbientLightColor property for the axes sets the color of the ambient light. The color is the same for all objects in the axes.

Example: `0.5`

Data Types: `double`

`DiffuseStrength` — Strength of diffuse light

`0.6` (default) | scalar in range `[0,1]`

Strength of diffuse light, specified as a scalar value in the range `[0,1]`. Diffuse light is the nonspecular reflectance from light objects in the axes.

Example: `0.3`

Data Types: `double`

`SpecularColorReflectance` — Color of specular reflections

1 (default) | scalar in range `[0,1]`

Color of specular reflections, specified as a scalar value in the range `[0,1]`. A value of `1` sets the color using only the color of the light source. A value of `0` sets the color using both the color of the object from which it reflects and the color of the light source. The Color property of the light contains the color of the light source. The proportions vary linearly for values in between.

Example: `0.5`

Data Types: `double`

`SpecularExponent` — Size of specular spot

10 (default) | scalar greater than or equal to 1

Size of specular spot, specified as a scalar value greater than or equal to 1. Most materials have exponents in the range `[5 20]`.

Example: `7`

Data Types: `double`

`SpecularStrength` — Strength of specular reflection

`0.9` (default) | scalar in range `[0,1]`

Strength of specular reflection, specified as a scalar value in the range `[0,1]`. Specular reflections are the bright spots on the surface from light objects in the axes.

Example: `0.3`

Data Types: `double`

Data

`XData` — x values

matrix

This property is read-only.

x values specified as a matrix. `XData` is at least a 2-by-2 matrix. `size(XData)`, `size(YData)`, and `size(ZData)` are equal.

`YData` — y values

matrix

This property is read-only.

y values, specified as a matrix. `YData` is at least a 2-by-2 matrix. `size(XData)`, `size(YData)`, and `size(ZData)` are equal.

`ZData` — Data that defines surface to contour

matrix

This property is read-only.

Data that defines the surface to contour, specified as a matrix. `ZData` is at least a 2-by-2 matrix. `size(XData)`, `size(YData)`, and `size(ZData)` are equal.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

Identifiers

`Type` — Type of graphics object

`'parameterizedfunctionsurface'`

This property is read-only.

Type of graphics object, returned as `'parameterizedfunctionsurface'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text for legend label

autogenerated label (default) | character vector

Text for legend label, specified as a custom character vector. The default label is autogenerated from the `Function` property and the `texlabel` function. The legend does not appear until you call the `legend` function.

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).

- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see “Callback Definition”.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `ParameterizedFunctionSurface` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `ParameterizedFunctionSurface` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `ParameterizedFunctionSurface` object that has no color. The `HitTest` property determines if the `ParameterizedFunctionSurface` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `ParameterizedFunctionSurface` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `ParameterizedFunctionSurface` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `ParameterizedFunctionSurface` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `ParameterizedFunctionSurface` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback. Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `ParameterizedFunctionSurface` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `ParameterizedFunctionSurface` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn`

property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`fmesh` | `fsurf`

Topics

"Access Property Values"
"Graphics Object Properties"

lasterr

Last error message

Note: `lasterr` will be removed in a future version. You can obtain information about any error that has been generated by catching an `MException`. See "Capture Information About Exceptions" in the Programming Fundamentals documentation.

Syntax

```
msgstr = lasterr
[msgstr, msgid] = lasterr
lasterr('new_msgstr')
lasterr('new_msgstr', 'new_msgid')
[msgstr, msgid] = lasterr('new_msgstr', 'new_msgid')
```

Description

`msgstr = lasterr` returns the last error message generated by the MATLAB software.

`[msgstr, msgid] = lasterr` returns the last error in `msgstr` and its message identifier in `msgid`. If the error was not defined with an identifier, `lasterr` returns an empty character vector for `msgid`. See "Message Identifiers" in the MATLAB Programming Fundamentals documentation for more information on the `msgid` argument and how to use it.

`lasterr('new_msgstr')` sets the last error message to a new character vector, `new_msgstr`, so that subsequent invocations of `lasterr` return the new error message. You can also set the last error to an empty character vector with `lasterr('')`.

`lasterr('new_msgstr', 'new_msgid')` sets the last error message and its identifier to `new_msgstr` and `new_msgid`, respectively. Subsequent invocations of `lasterr` return the new error message and message identifier.

`[msgstr, msgid] = lasterr('new_msgstr', 'new_msgid')` returns the last error message and its identifier, also changing these values so that subsequent

invocations of `lasterr` return the message and identifier specified by `new_msgstr` and `new_msgid` respectively.

Examples

Example 1

Here is a function that examines the `lasterr` character vector and displays its own message based on the error that last occurred. This example deals with two cases, each of which is an error that can result from a matrix multiply:

```
function matrix_multiply(A, B)
try
   A * B
catch
   errmsg = lasterr;
   if(strfind(errmsg, 'Inner matrix dimensions'))
      disp('** Wrong dimensions for matrix multiply')
   else
      if(strfind(errmsg, 'not defined for variables of class'))
         disp('** Both arguments must be double matrices')
      end
   end
end
```

If you call this function with matrices that are incompatible for matrix multiplication (e.g., the column dimension of `A` is not equal to the row dimension of `B`), MATLAB catches the error and uses `lasterr` to determine its source:

```
A = [1  2  3; 6  7  2; 0  -1  5];
B = [9  5  6; 0  4  9];

matrix_multiply(A, B)
** Wrong dimensions for matrix multiply
```

Example 2

Specify a message identifier and error message with `error`:

```
error('MyToolbox:angleTooLarge', ...
      'The angle specified must be less than 90 degrees.');
```

In your error handling code, use `lasterr` to determine the message identifier and error message for the failing operation:

```
[errmsg, msgid] = lasterr
errmsg =
   The angle specified must be less than 90 degrees.
msgid =
   MyToolbox:angleTooLarge
```

See Also

error | lasterror | rethrow | warning | lastwarn

Introduced before R2006a

lasterror

Last error message and related information

Note: `lasterror` will be removed in a future version. You can obtain information about any error that has been generated by catching an `MException`. See "Capture Information About Exceptions" in the Programming Fundamentals documentation.

Syntax

```
s = lasterror
s = lasterror(err)
s = lasterror('reset')
```

Description

`s = lasterror` returns a structure `s` containing information about the most recent error issued by the MATLAB software. The return structure contains the following fields:

Fieldname	Description
`message`	Character array containing the text of the error message.
`identifier`	Character array containing the message identifier of the error message. If the last error issued by MATLAB had no message identifier, then the `identifier` field is an empty character array.
`stack`	Structure providing information on the location of the error. The structure has fields `file`, `name`, and `line`, and is the same as the structure returned by the `dbstack` function. If `lasterror` returns no stack information, `stack` is a 0-by-1 structure having the same three fields.

Note The `lasterror` return structure might contain additional fields in future versions of MATLAB.

The fields of the structure returned in `stack` are

Fieldname	Description
`file`	Name of the file in which the function generating the error appears. This field is the empty character vector if there is no file.
`name`	Name of the function in which the error occurred. If this is the primary function in the file, and the function name differs from the file name, `name` is set to the file name.
`line`	Line number of the file at which the error occurred.

See "Message Identifiers" in the MATLAB Programming Fundamentals documentation for more information on the syntax and usage of message identifiers.

`s = lasterror(err)` sets the last error information to the error message and identifier specified in the structure `err`. Subsequent invocations of `lasterror` return this new error information. The optional return structure `s` contains information on the previous error.

`s = lasterror('reset')` sets the last error information to the default state. In this state, the `message` and `identifier` fields of the return structure are empty character vectors, and the `stack` field is a 0-by-1 structure.

Examples

Example 1

Save the following MATLAB code in a file called `average.m`:

```
function y = average(x)
% AVERAGE Mean of vector elements.
% AVERAGE(X), where X is a vector, is the mean of vector elements.
% Nonvector input results in an error.
check_inputs(x)
y = sum(x)/length(x);      % The actual computation

function check_inputs(x)
[m,n] = size(x);
if (~((m == 1) || (n == 1)) || (m == 1 && n == 1))
    error('AVG:NotAVector', 'Input must be a vector.')
end
```

Now run the function. Because this function requires vector input, passing a scalar value to it forces an error. The error occurs in subroutine `check_inputs`:

```
average(200)
Error using average>check_inputs (line 11)
Input must be a vector.

Error in average (line 5)
check_inputs(x)
```

Get the three fields from `lasterror`:

```
err = lasterror
err =
       message: [1x61 char]
    identifier: 'AVG:NotAVector'
         stack: [2x1 struct]
```

Display the text of the error message:

```
msg = err.message
msg =
    Error using average>check_inputs (line 11)
    Input must be a vector.
```

Display the fields containing the `stack` information. `err.stack` is a 2-by-1 structure because it provides information on the failing subroutine `check_inputs` and also the outer, primary function `average`:

```
st1 = err.stack(1,1)
st1 =
    file: 'd:\matlab_test\average.m'
    name: 'check_inputs'
    line: 11

st2 = err.stack(2,1)
st2 =
    file: 'd:\matlab_test\average.m'
    name: 'average'
    line: 5
```

Note As a rule, the name of your primary function should be the same as the name of the file that contains that function. If these names differ, MATLAB uses the file name in the `name` field of the `stack` structure.

Example 2

`lasterror` is often used in conjunction with the MException.rethrow function in `try, catch` statements. For example,

```
try
   do_something
catch
   do_cleanup
   rethrow(lasterror)
end
```

Tips

MathWorks is gradually transitioning MATLAB error handling to an object-oriented scheme that is based on the MException class. Although support for `lasterror` is expected to continue, using the static MException.last method of `MException` is preferable.

Warning: `lasterror` and `MException.last` are not guaranteed to always return identical results. For example, `MException.last` updates its error status only on uncaught errors, where `lasterror` can update its error status on any error, whether it is caught or not.

See Also

See Also

MException.rethrow | MException | MException.last | `assert` | `dbstack` | `error` | `lastwarn` | `try, catch`

Introduced before R2006a

lastwarn

Last warning message

Syntax

```
msgstr = lastwarn
[msgstr, msgid] = lastwarn
lastwarn('new_msgstr')
lastwarn('new_msgstr', 'new_msgid')
[msgstr, msgid] = lastwarn('new_msgstr', 'new_msgid')
```

Description

`msgstr = lastwarn` returns the last warning message generated by MATLAB, regardless of its display state.

`[msgstr, msgid] = lastwarn` returns the last warning in `msgstr` and its message identifier in `msgid`. If the warning was not defined with an identifier, `lastwarn` returns an empty character vector for `msgid`.

`lastwarn('new_msgstr')` sets the last warning message to a new character vector, `new_msgstr`, so that subsequent invocations of `lastwarn` return the new warning message. You can also set the last warning to an empty character vector with `lastwarn('')`.

`lastwarn('new_msgstr', 'new_msgid')` sets the last warning message and its identifier to new character vectors `new_msgstr` and `new_msgid`, respectively. Subsequent invocations of `lastwarn` return the new warning message and message identifier.

`[msgstr, msgid] = lastwarn('new_msgstr', 'new_msgid')` returns the last warning message and its identifier, also changing these values so that subsequent invocations of `lastwarn` return the message and identifier specified by `new_msgstr` and `new_msgid`, respectively.

Examples

Write a short function that generates a warning message. At the start of the function, enable any warnings that have a message identifier called `TestEnv:InvalidInput`:

```
function myfun(p1)
warning on TestEnv:InvalidInput;

exceedMax = find(p1 > 5000);
if any(exceedMax)
    warning('TestEnv:InvalidInput', ...
        '%d values in the "%s" array exceed the maximum.', ...
        length(exceedMax), inputname(1))
end
```

Pass an invalid value to the function:

```
dataIn = magic(10) - 2;

myfun(dataIn)
Warning: 2 values in the "dataIn" array exceed the maximum.
> In myfun at 4
```

Use `lastwarn` to determine the message identifier and warning message for the operation:

```
[warnmsg, msgid] = lastwarn
warnmsg =
   2 values in the "dataIn" array exceed the maximum.
msgid =
   TestEnv:InvalidInput
```

Tips

`lastwarn` does not return warnings that are reported during the parsing of MATLAB commands. (Warning messages that include the failing file name and line number are parse-time warnings.)

See Also

See Also

`error` | `warning`

Topics

"Issue Warnings and Errors"
"Suppress Warnings"
"Restore Warnings"

Introduced before R2006a

lcm

Least common multiple

Syntax

```
L = lcm(A,B)
```

Description

`L = lcm(A,B)` returns the least common multiples of the elements of `A` and `B`.

Examples

Least Common Multiples of Double Array and a Scalar

```
A = [5 17; 10 60];
B = 45;
L = lcm(A,B)
```

```
L =

    45   765
    90   180
```

Least Common Multiples of Unsigned Integers

```
A = uint16([255 511 15]);
B = uint16([15 127 1023]);
L = lcm(A,B)
```

```
L = 1×3 uint16 row vector

     255   64897    5115
```

Input Arguments

A,B — Input values

scalars, vectors, or arrays of real, positive integer values

Input values, specified as scalars, vectors, or arrays of real, positive integer values. A and B can be any numeric type, and they can be of different types within certain limitations:

- If A or B is of type `single`, then the other can be of type `single` or `double`.
- If A or B belongs to an integer class, then the other must belong to the same class or it must be a `double` scalar value.

A and B must be the same size or one must be a scalar.

Example: `[20 3 13],[10 6 7]`

Example: `int16([100 30 200]),int16([20 15 9])`

Example: `int16([100 30 200]),20`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

L — Least common multiple

real, positive integer values

Least common multiple, returned as an array of real positive integer values. L is the same size as A and B, and it has the same type as A and B. If A and B are of different types, then L is returned as the nondouble type.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

gcd

Introduced before R2006a

ldl

Block LDL' factorization for Hermitian indefinite matrices

Syntax

```
L = ldl(A)
[L,D] = ldl(A)
[L,D,P] = ldl(A)
[L,D,p] = ldl(A,'vector')
[U,D,P] = ldl(A,'upper')
[U,D,p] = ldl(A,'upper','vector')
[L,D,P,S] = ldl(A)
[L,D,P,S] = LDL(A,THRESH)
[U,D,p,S] = LDL(A,THRESH,'upper','vector')
```

Description

`L = ldl(A)` returns only the permuted lower triangular matrix `L` as in the two-output form. The permutation information is lost, as is the block diagonal factor `D`. By default, `ldl` references only the diagonal and lower triangle of `A`, and assumes that the upper triangle is the complex conjugate transpose of the lower triangle. Therefore `[L,D,P] = ldl(TRIL(A))` and `[L,D,P] = ldl(A)` both return the exact same factors. Note, this syntax is not valid for sparse `A`.

`[L,D] = ldl(A)` stores a block diagonal matrix `D` and a permuted lower triangular matrix in `L` such that `A = L*D*L'`. The block diagonal matrix `D` has 1-by-1 and 2-by-2 blocks on its diagonal. Note, this syntax is not valid for sparse `A`.

`[L,D,P] = ldl(A)` returns unit lower triangular matrix `L`, block diagonal `D`, and permutation matrix `P` such that `P'*A*P = L*D*L'`. This is equivalent to `[L,D,P] = ldl(A,'matrix')`.

`[L,D,p] = ldl(A,'vector')` returns the permutation information as a vector, `p`, instead of a matrix. The `p` output is a row vector such that `A(p,p) = L*D*L'`.

`[U,D,P] = ldl(A,'upper')` references only the diagonal and upper triangle of `A` and assumes that the lower triangle is the complex conjugate transpose of the upper triangle.

This syntax returns a unit upper triangular matrix U such that P'*A*P = U'*D*U (assuming that A is Hermitian, and not just upper triangular). Similarly, [L,D,P] = ldl(A,'lower') gives the default behavior.

[U,D,p] = ldl(A,'upper','vector') returns the permutation information as a vector, p, as does [L,D,p] = ldl(A,'lower','vector'). A must be a full matrix.

[L,D,P,S] = ldl(A) returns unit lower triangular matrix L, block diagonal D, permutation matrix P, and scaling matrix S such that P'*S*A*S*P = L*D*L'. This syntax is only available for real sparse matrices, and only the lower triangle of A is referenced. ldl uses MA57 for sparse real symmetric A.

[L,D,P,S] = LDL(A,THRESH) uses THRESH as the pivot tolerance in MA57. THRESH must be a double scalar lying in the interval [0, 0.5]. The default value for THRESH is 0.01. Using smaller values of THRESH may give faster factorization times and fewer entries, but may also result in a less stable factorization. This syntax is available only for real sparse matrices.

[U,D,p,S] = LDL(A,THRESH,'upper','vector') sets the pivot tolerance and returns upper triangular U and permutation vector p as described above.

Examples

These examples illustrate the use of the various forms of the ldl function, including the one-, two-, and three-output form, and the use of the vector and upper options. The topics covered are:

- "Example 1 — Two-Output Form of ldl" on page 1-6371
- "Example 2 — Three Output Form of ldl" on page 1-6371
- "Example 3 — The Structure of D" on page 1-6372
- "Example 4 — Using the 'vector' Option" on page 1-6372
- "Example 5 — Using the 'upper' Option" on page 1-6372
- "Example 6 — linsolve and the Hermitian indefinite solver" on page 1-6373

Before running any of these examples, you will need to generate the following positive definite and indefinite Hermitian matrices:

```
A = full(delsq(numgrid('L', 10)));
B = gallery('uniformdata',10,0);
M = [eye(10) B; B' zeros(10)];
```

The structure of M here is very common in optimization and fluid-flow problems, and M is in fact indefinite. Note that the positive definite matrix A must be full, as `ldl` does not accept sparse arguments.

Example 1 — Two-Output Form of ldl

The two-output form of `ldl` returns L and D such that `A-(L*D*L')` is small, L is permuted unit lower triangular, and D is a block 2-by-2 diagonal. Note also that, because A is positive definite, the diagonal of D is all positive:

```
[LA,DA] = ldl(A);
fprintf(1, ...
'The factorization error ||A - LA*DA*LA''|| is %g\n', ...
norm(A - LA*DA*LA'));
neginds = find(diag(DA) < 0)
```

Given a b, solve Ax=b using LA, DA:

```
bA = sum(A,2);
x = LA'\(DA\(LA\bA));
fprintf(...
'The absolute error norm ||x - ones(size(bA))|| is %g\n', ...
norm(x - ones(size(bA))));
```

Example 2 — Three Output Form of ldl

The three output form returns the permutation matrix as well, so that L is in fact unit lower triangular:

```
[Lm, Dm, Pm] = ldl(M);
fprintf(1, ...
'The error norm ||Pm''*M*Pm - Lm*Dm*Lm''|| is %g\n', ...
norm(Pm'*M*Pm - Lm*Dm*Lm'));
fprintf(1, ...
'The difference between Lm and tril(Lm) is %g\n', ...
norm(Lm - tril(Lm)));
```

Given b, solve Mx=b using Lm, Dm, and Pm:

```
bM = sum(M,2);
x = Pm*(Lm'\(Dm\(Lm\(Pm'*bM))));
fprintf(...
'The absolute error norm ||x - ones(size(b))|| is %g\n', ...
norm(x - ones(size(bM))));
```

Example 3 — The Structure of D

D is a block diagonal matrix with 1-by-1 blocks and 2-by-2 blocks. That makes it a special case of a tridiagonal matrix. When the input matrix is positive definite, D is almost always diagonal (depending on how definite the matrix is). When the matrix is indefinite however, D may be diagonal or it may express the block structure. For example, with A as above, DA is diagonal. But if you shift A just a bit, you end up with an indefinite matrix, and then you can compute a D that has the block structure.

```
figure; spy(DA); title('Structure of D from ldl(A)');
[Las, Das] = ldl(A - 4*eye(size(A)));
figure; spy(Das);
title('Structure of D from ldl(A - 4*eye(size(A)))');
```

Example 4 — Using the 'vector' Option

Like the `lu` function, `ldl` accepts an argument that determines whether the function returns a permutation vector or permutation matrix. `ldl` returns the latter by default. When you select `'vector'`, the function executes faster and uses less memory. For this reason, specifying the `'vector'` option is recommended. Another thing to note is that indexing is typically faster than multiplying for this kind of operation:

```
[Lm, Dm, pm] = ldl(M, 'vector');
fprintf(1, 'The error norm ||M(pm,pm) - Lm*Dm*Lm''|| is %g\n', ...
  norm(M(pm,pm) - Lm*Dm*Lm'));

% Solve a system with this kind of factorization.
clear x;
x(pm,:) = Lm'\(Dm\(Lm\(bM(pm,:))));
fprintf('The absolute error norm ||x - ones(size(b))|| is %g\n', ...
  norm(x - ones(size(bM))));
```

Example 5 — Using the 'upper' Option

Like the `chol` function, `ldl` accepts an argument that determines which triangle of the input matrix is referenced, and also whether `ldl` returns a lower (L) or upper (L') triangular factor. For dense matrices, there are no real savings with using the upper triangular version instead of the lower triangular version:

```
Ml = tril(M);
[Lml, Dml, Pml] = ldl(Ml, 'lower'); % 'lower' is default behavior.
fprintf(1, ...
'The difference between Lml and Lm is %g\n', norm(Lml - Lm));
[Umu, Dmu, pmu] = ldl(triu(M), 'upper', 'vector');
fprintf(1, ...
'The difference between Umu and Lm'' is %g\n', norm(Umu - Lm'));
```

```
% Solve a system using this factorization.
clear x;
x(pm,:) = Umu\(Dmu\(Umu'\(bM(pmu,:))));
fprintf(...
'The absolute error norm ||x - ones(size(b))|| is %g\n', ...
norm(x - ones(size(bM))));
```

When specifying both the `'upper'` and `'vector'` options, `'upper'` must precede `'vector'` in the argument list.

Example 6 — linsolve and the Hermitian indefinite solver

When using the `linsolve` function, you may experience better performance by exploiting the knowledge that a system has a symmetric matrix. The matrices used in the examples above are a bit small to see this so, for this example, generate a larger matrix. The matrix here is symmetric positive definite, and below we will see that with each bit of knowledge about the matrix, there is a corresponding speedup. That is, the symmetric solver is faster than the general solver while the symmetric positive definite solver is faster than the symmetric solver:

```
Abig = full(delsq(numgrid('L', 30)));
bbig = sum(Abig, 2);
LSopts.POSDEF = false;
LSopts.SYM = false;
tic; linsolve(Abig, bbig, LSopts); toc;
LSopts.SYM = true;
tic; linsolve(Abig, bbig, LSopts); toc;
LSopts.POSDEF = true;
tic; linsolve(Abig, bbig, LSopts); toc;
```

Algorithms

`ldl` uses the MA57 routines in the Harwell Subroutine Library (HSL) for real sparse matrices.

References

[1] Ashcraft, C., R.G. Grimes, and J.G. Lewis. “Accurate Symmetric Indefinite Linear Equations Solvers.” *SIAM J. Matrix Anal. Appl.* Vol. 20. Number 2, 1998, pp. 513–561.

[2] Duff, I. S. "MA57 — A new code for the solution of sparse symmetric definite and indefinite systems." Technical Report RAL-TR-2002-024, Rutherford Appleton Laboratory, 2002.

See Also

`chol` | `lu` | `qr`

ldivide, .\

Left array division

Syntax

```
x = B.\A
x = ldivide(B,A)
```

Description

`x = B.\A` divides each element of `A` by the corresponding element of `B`.

`x = ldivide(B,A)` is an alternative way to divide `A` by `B`, but is rarely used. It enables operator overloading for classes.

Examples

Divide Two Numeric Arrays

```
A = ones(2,3);
B = [1 2 3; 4 5 6];
x = B.\A
```

```
x =

    1.0000    0.5000    0.3333
    0.2500    0.2000    0.1667
```

Divide a Scalar by a Numeric Array

```
C = 2;
D = [1 2 3; 4 5 6];
x = D.\C
```

```
x =

    2.0000    1.0000    0.6667
```

```
    0.5000    0.4000    0.3333
```

Input Arguments

A — Numerator

scalar | vector | matrix | multidimensional array

Numerator, specified as a scalar, vector, matrix or multidimensional array. Numeric inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are duration arrays, then they must be the same size unless one is a scalar.

If B is an integer data type, then A must be the same integer type or be a scalar double.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration` | `char`
Complex Number Support: Yes

B — Denominator

scalar | vector | matrix | multidimensional array

Denominator, specified as a scalar, vector, matrix or multidimensional array. Numeric inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are duration arrays, then they must be the same size unless one is a scalar.

If A is an integer data type, then B must be the same integer type or be a scalar double.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration` | `char`
Complex Number Support: Yes

Output Arguments

x — Solution

scalar | vector | matrix | multidimensional array

Solution, returned as a scalar, vector, matrix or multidimensional array. If either A or B are integer data types, then x is that same integer data type.

Tips

- When dividing integers, use `idivide` for more rounding options.
- MATLAB does not support complex integer division.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`idivide` | `mldivide` | `mrdivide` | `rdivide`

Topics

“Array vs. Matrix Operations”
“Operator Precedence”
“MATLAB Operators and Special Characters”

Introduced before R2006a

le, <=

Determine less than or equal to

Syntax

```
A <= B
le(A,B)
```

Description

`A <= B` returns a logical array with elements set to logical 1 (`true`) where `A` is less than or equal to `B`; otherwise, the element is logical `0` (`false`). The test compares only the real part of numeric arrays. `le` returns logical `0` (`false`) where `A` or `B` have NaN or undefined categorical elements.

`le(A,B)` is an alternate way to execute `A <= B`, but is rarely used. It enables operator overloading for classes.

Examples

Test Vector Elements

Find which vector elements are less than or equal to a given value.

Create a numeric vector.

```
A = [1 12 18 7 9 11 2 15];
```

Test the vector for elements that are less than or equal to `12`.

```
A <= 12
```

```
ans = 1×8 logical array
   1   1   0   1   1   1   1   0
```

The result is a vector with values of logical `1` (`true`) where the elements of `A` satisfy the expression.

Use the vector of logical values as an index to view the values in A that are less than or equal to 12.

```
A(A <= 12)
```

```
ans =

     1    12     7     9    11     2
```

The result is a subset of the elements in A.

Replace Elements of Matrix

Create a matrix.

```
A = magic(4)
```

```
A =

    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1
```

Replace all values less than or equal to 9 with the value 10.

```
A(A <= 9) = 10
```

```
A =

    16    10    10    13
    10    11    10    10
    10    10    10    12
    10    14    15    10
```

The result is a new matrix whose smallest element is 10.

Compare Values in Categorical Array

Create an ordinal categorical array.

```
A = categorical({'large' 'medium' 'small'; 'medium' ...
'small' 'large'},{'small' 'medium' 'large'},'Ordinal',1)
```

```
A = 2×3 categorical array
     large       medium      small
     medium      small       large
```

The array has three categories: `'small'`, `'medium'`, and `'large'`.

Find all values less than or equal to the category `'medium'`.

```
A <= 'medium'
```

```
ans = 2×3 logical array
   0   1   1
   1   1   0
```

A value of logical `1` (`true`) indicates a value less than or equal to the category `'medium'`.

Compare the rows of `A`.

```
A(1,:) <= A(2,:)
```

```
ans = 1×3 logical array
   0   0   1
```

The function returns logical `1` (`true`) where the first row has a category value less than or equal to the second row.

Test Complex Numbers

Create a vector of complex numbers.

```
A = [1+i 2-2i 1+3i 1-2i 5-i];
```

Find the values that are less than or equal to `3`.

```
A(A <= 3)
```

```
ans =
   1.0000 + 1.0000i   2.0000 - 2.0000i   1.0000 + 3.0000i   1.0000 - 2.0000i
```

`le` compares only the real part of the elements in `A`.

Use `abs` to find which elements are within a radius of `3` from the origin.

```
A(abs(A) <= 3)
```

```
ans =
   1.0000 + 1.0000i   2.0000 - 2.0000i   1.0000 - 2.0000i
```

The result has one less element. The element `1.0000 + 3.0000i` is not within a radius of `3` from the origin.

Test Duration Values

Create a `duration` array.

```
d = hours(21:25) + minutes(75)
```

```
d = 1×5 duration array
   22.25 hr   23.25 hr   24.25 hr   25.25 hr   26.25 hr
```

Test the array for elements that are less than or equal to one standard day.

```
d <= 1
```

```
ans = 1×5 logical array
   1   1   0   0   0
```

Input Arguments

A — Left array

scalar | vector | matrix | multidimensional array

Left array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs `A` and `B` must either be the same size or have sizes that are compatible

(for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is an ordinal categorical array, the other input can be an ordinal categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have the same sets of categories, including their order. See "Compare Categorical Array Elements" for more details.
- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.
- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

B — Right array

scalar | vector | matrix | multidimensional array

Right array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is an ordinal categorical array, the other input can be an ordinal categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have

the same sets of categories, including their order. See "Compare Categorical Array Elements" for more details.

- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.
- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

Tips

- Some floating-point numbers cannot be represented exactly in binary form. This leads to small differences in results that the <= operator reflects. For more information, see "Avoiding Common Problems with Floating-Point Arithmetic".

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`eq` | `ge` | `gt` | `lt` | `ne`

Topics

"Array Comparison with Relational Operators"
"Ordinal Categorical Arrays"
"MATLAB Operators and Special Characters"

Introduced before R2006a

legend

Add legend to axes

Syntax

```
legend('show')
```

```
legend(label1,...,labelN)
legend(labels)
legend(labels,Name,Value)
legend(subset, ___ )
legend(target, ___ )
```

```
legend( ___ ,'Location',lcn)
legend( ___ ,'Orientation',ornt)
legend(boxOption)
```

```
lgd = legend( ___ )
[lgd,icons,plots,txt] = legend( ___ )
```

```
legend(visibilityOption)
legend('off')
```

Description

`legend('show')` creates a legend for the current axes or chart returned by `gca`. The legend automatically updates when you add or delete graphics objects from the axes. For the labels, the legend uses the text from the `DisplayName` properties of the graphics objects. If the `DisplayName` property is empty, then the legend uses a label of the form `'dataN'`. If the current axes are empty, then this command creates an empty legend. If a legend exists, then the command ensures that it is visible.

`legend(label1,...,labelN)` sets the legend labels. Specify the labels as a list of character vectors, such as `legend('Jan','Feb','Mar')`.

`legend(labels)` sets the labels using a cell array of character vectors or a character matrix; for example, `legend({'Jan','Feb','Mar'})`.

`legend(labels,Name,Value)` sets legend properties using one or more name-value pair arguments. You must specify the labels using a cell array; for example, `legend({'A','B'},'FontSize',12)`.

`legend(subset, ___ )` only includes items in the legend for the graphics objects listed in `subset`. Specify the graphics objects before specifying the labels.

`legend(target, ___ )` uses the axes, polar axes, or chart specified by `target` instead of the current axes or chart. Specify the target as the first input argument.

`legend( ___ ,'Location',lcn)` sets the legend location. For example, `'Location','northeast'` positions the legend in the upper right corner of the axes. You can use this option after any of the input argument combinations in the previous syntax group.

`legend( ___ ,'Orientation',ornt)`, where `ornt` is `'horizontal'`, displays the legend items side-by-side. The default for `ornt` is `'vertical'`, which stacks the items vertically.

`legend(boxOption)`, where `boxOption` is `'off'`, removes the legend background and outline. The default for `boxOption` is `'on'`, which displays the legend background and outline.

`lgd = legend( ___ )` returns the `Legend` object. Use `lgd` to query and set properties of the legend after it is created. For a list of properties, see Legend Properties.

`[lgd,icons,plots,txt] = legend( ___ )` additionally returns the objects used to create the legend icons, the objects plotted in the graph, and an array of the label text. This syntax creates a new legend instead of reusing the existing legend. Also, the legend does not automatically update when you add or remove charts from the axes.

Note: This syntax is not recommended. It creates a legend that does not support all graphics features. Instead, use the `lgd = legend(__)` syntax to return the `Legend` object and set Legend Properties.

`legend(visibilityOption)` controls the visibility of the legend, where `visibilityOption` is `'hide'` or `'toggle'`.

`legend('off')` deletes the legend.

Examples

Add Legend to Current Axes

Plot two lines and add a legend to the current axes. Specify the legend labels as input arguments to the `legend` function.

```
x = -pi:pi/20:pi;
y1 = sin(x);
plot(x,y1)

hold on
y2 = cos(x);
plot(x,y2,'--')
hold off

legend('sin(x)','cos(x)')
```

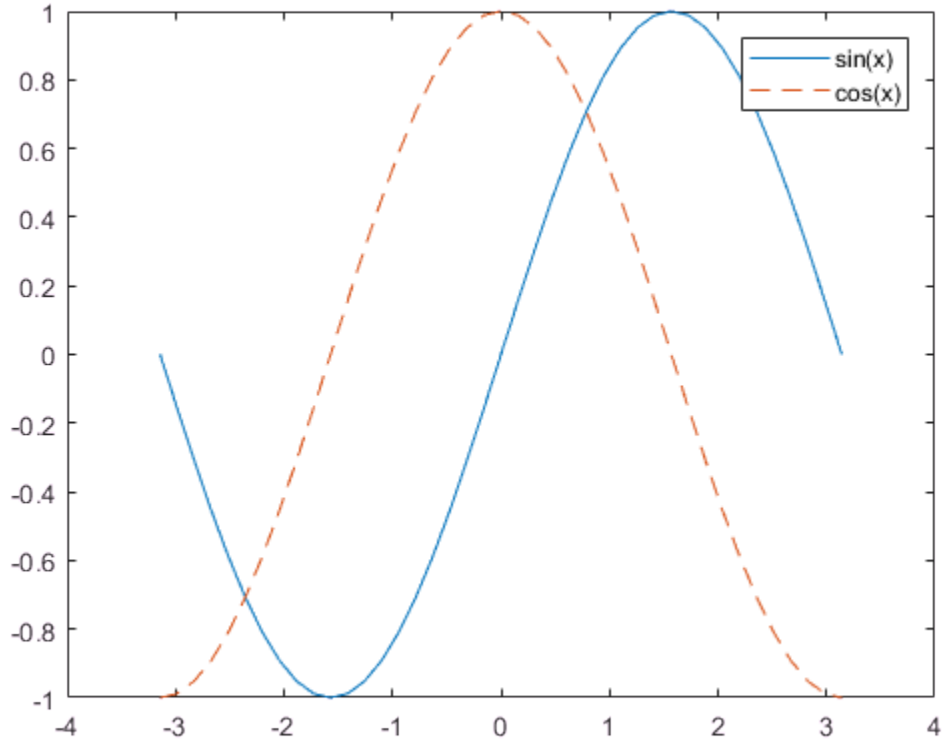

Specify Legend Labels During Plotting Commands

Plot two lines. Specify the legend labels during the plotting commands by setting the `DisplayName` property to the desired text. Then, add a legend.

```
x = linspace(-3,3,25);
y1 = sin(x);
plot(x,y1,'DisplayName','sin(x)')

hold on
y2 = cos(x);
plot(x,y2,'--','DisplayName','cos(x)')
```

```
legend('show')
```

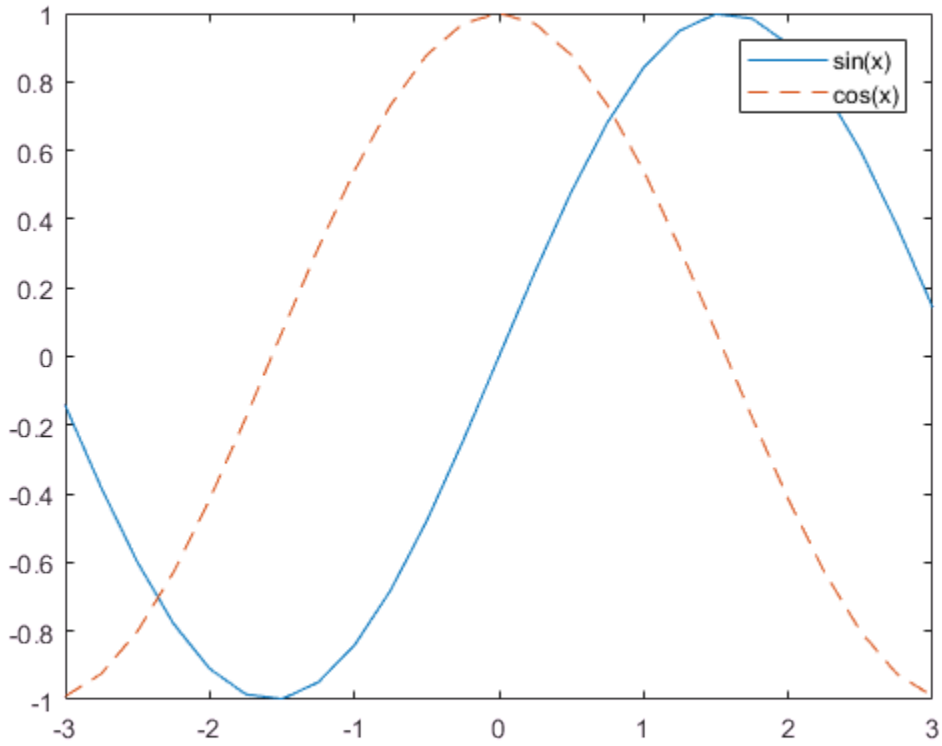

Add Plots to Axes After Creating Legend

Plot a line and add a legend to the axes. Then plot another line. The legend automatically updates to include the new line in the legend. Control the label for the new line by setting the `DisplayName` property as a name-value pair when creating the line.

```
x = linspace(0,10);
y1 = sin(x);
plot(x,y1)
legend('First Line')
```

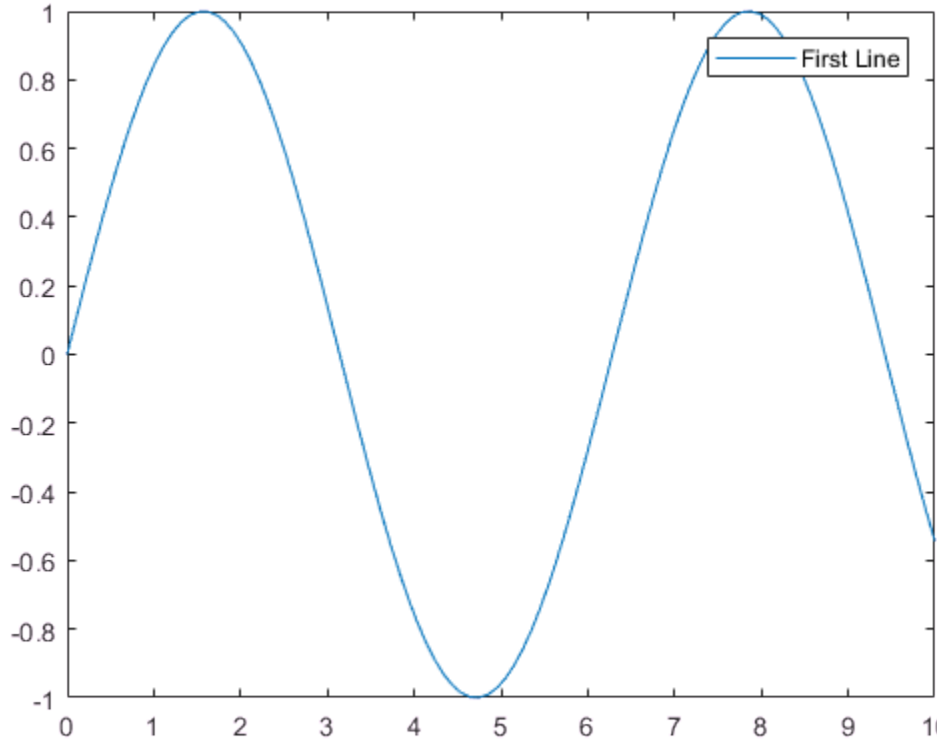


```
hold on
y2 = cos(x);
plot(x,y2,'DisplayName','Second Line')
```

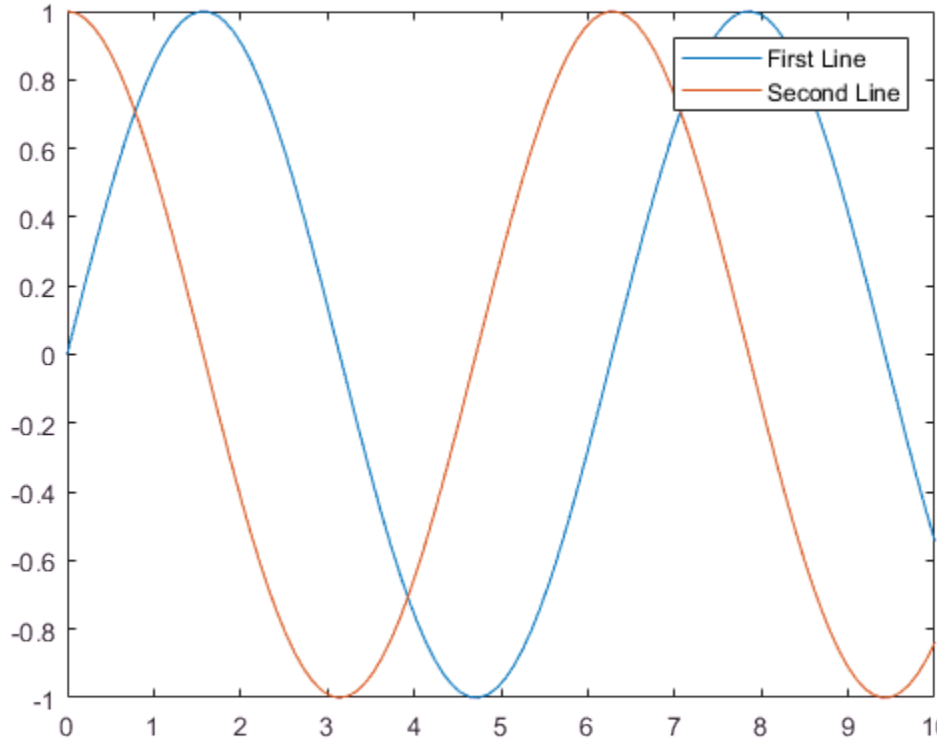

Note: If you do not want the legend to automatically update when plots are added to or removed from the axes, then set the `AutoUpdate` parameter of the legend to `'off'`, such as `legend('First Line','AutoUpdate','off')`.

Add Legend to Specific Axes

Create a figure with two subplots and return the two axes objects, `ax1` and `ax2`. Plot random data in each subplot. Add a legend to the upper subplot by specifying `ax1` as the first input argument to `legend`.

```
y1 = rand(3);
ax1 = subplot(2,1,1);
plot(y1)
```

```
y2 = rand(5);
ax2 = subplot(2,1,2);
plot(y2)

legend(ax1,'Line 1','Line 2','Line 3')
```

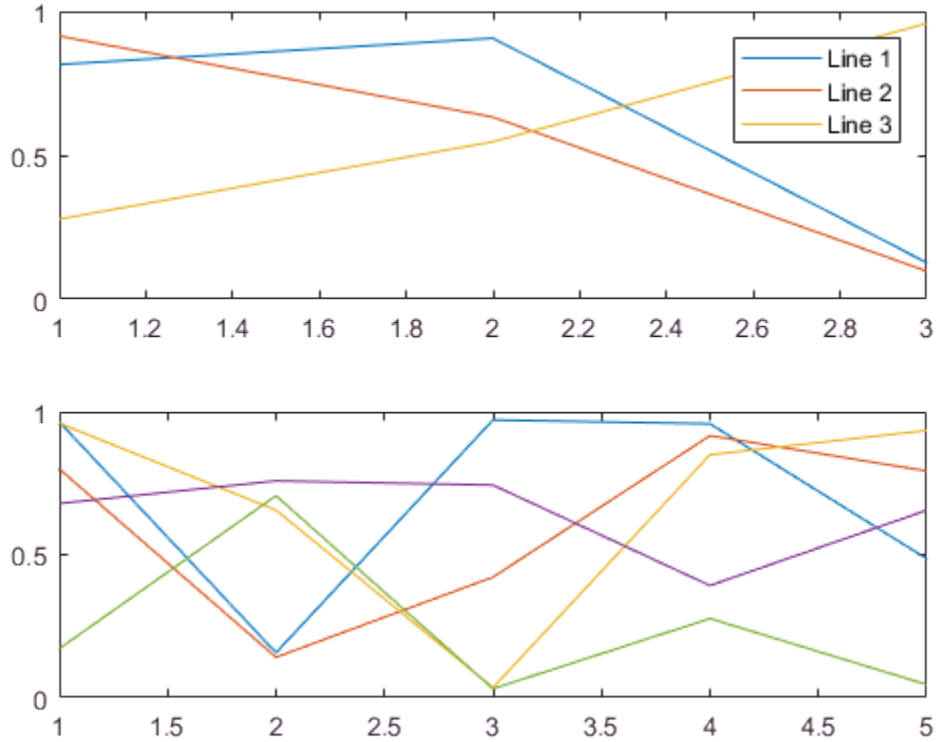

Specify Charts to Include in Legend

Plot three lines and return the chart line objects created. Then, create a legend that includes only two of the lines by specifying the first input argument as a vector of the chart line objects to include.

```
x = linspace(0,3*pi);
y1 = sin(x);
p1 = plot(x,y1);

hold on
y2 = sin(x - pi/4);
p2 = plot(x,y2);

y3 = sin(x - pi/2);
p3 = plot(x,y3);
hold off

legend([p1 p3],'First','Third')
```

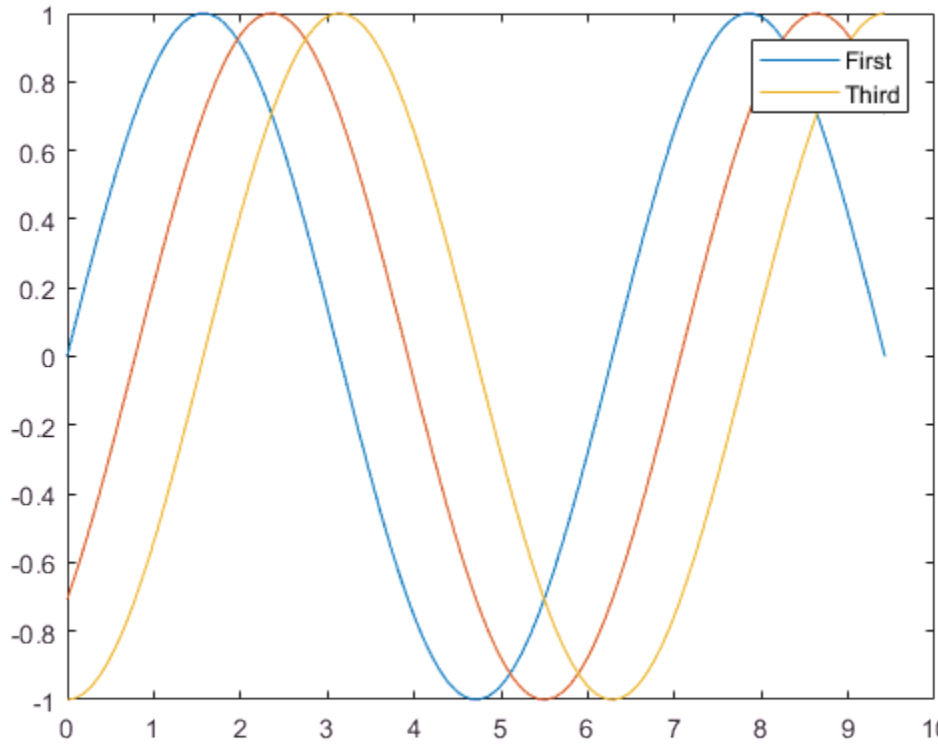

Specify Legend Location and Orientation

Plot two lines and add a legend. Control the location of the legend by setting the `Location` property. Control the orientation by setting the `Orientation` property.

```
x = -pi:pi/20:pi;
y1 = sin(x);
plot(x,y1)

hold on
y2 = cos(x);
plot(x,y2,'--')
hold off

legend('sin(x)','cos(x)','Location','northwest','Orientation','horizontal')
```

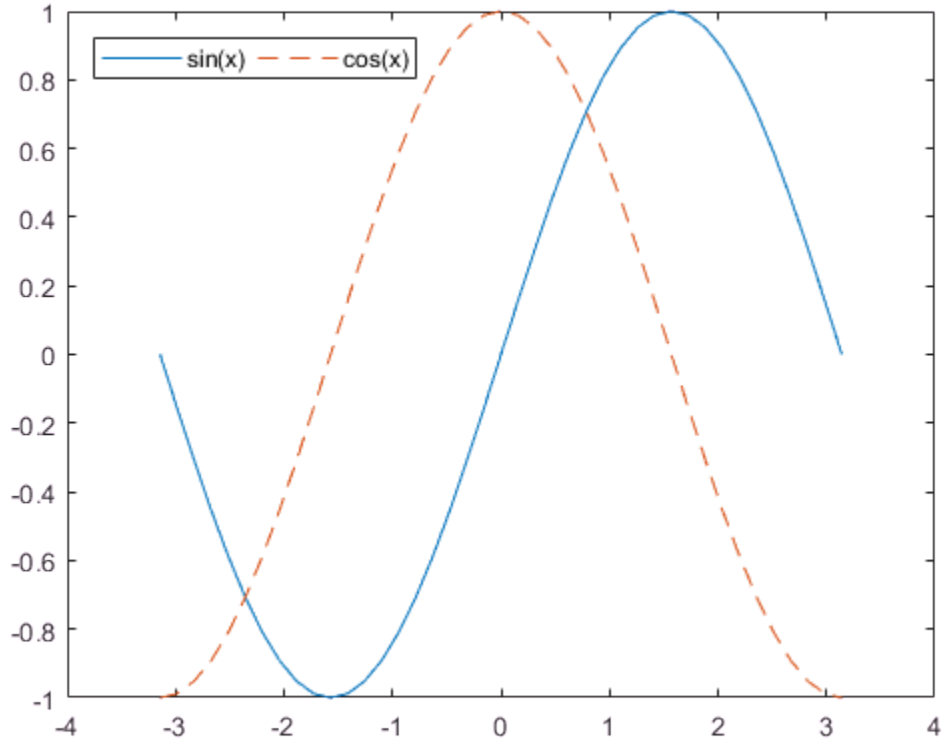

Add Title to Legend

Plot two lines and create a legend. Then, add a title to the legend.

```
x = -pi:pi/20:pi;
y1 = sin(x);
plot(x,y1)

hold on
y2 = cos(x);
plot(x,y2)
hold off
```

```
lgd = legend('sin(x)','cos(x)');
title(lgd,'My Legend Title')
```

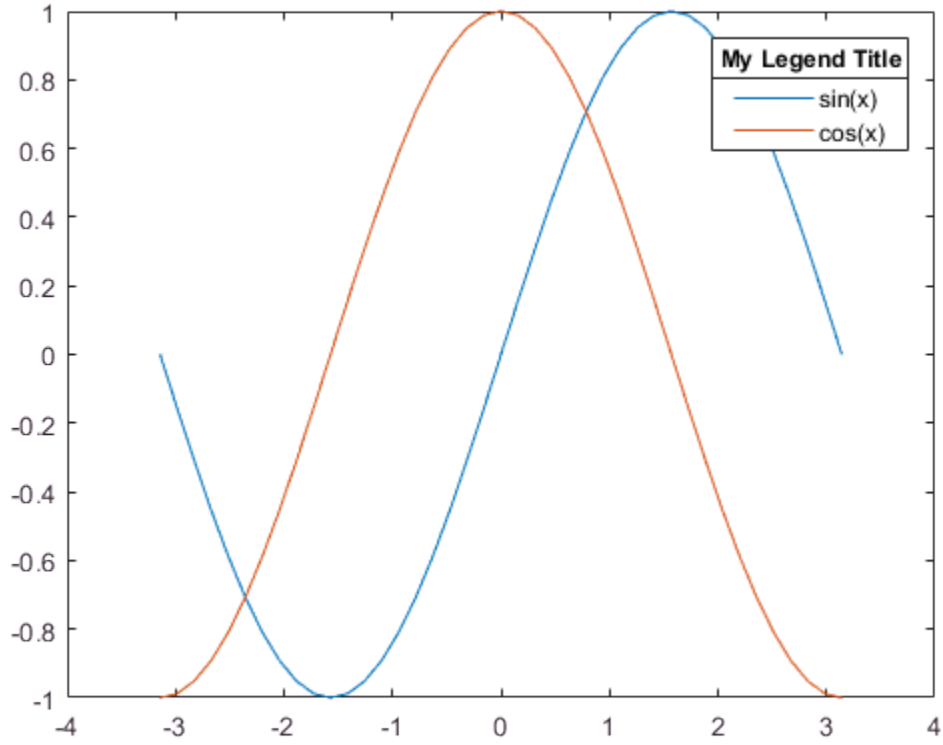

Modify Legend Appearance

Plot a line chart and a stem chart. Add a legend to the axes and set properties of the legend using name-value pair arguments. When you specify name-value pair arguments, you must specify the labels using a cell array.

```
x = linspace(-3,3,25);
y1 = sin(x);
plot(x,y1)

hold on
```

```
y2 = cos(x);
stem(x,y2)
hold off

legend({'sin(x)','cos(x)'},'FontSize',12,'TextColor','blue')
```

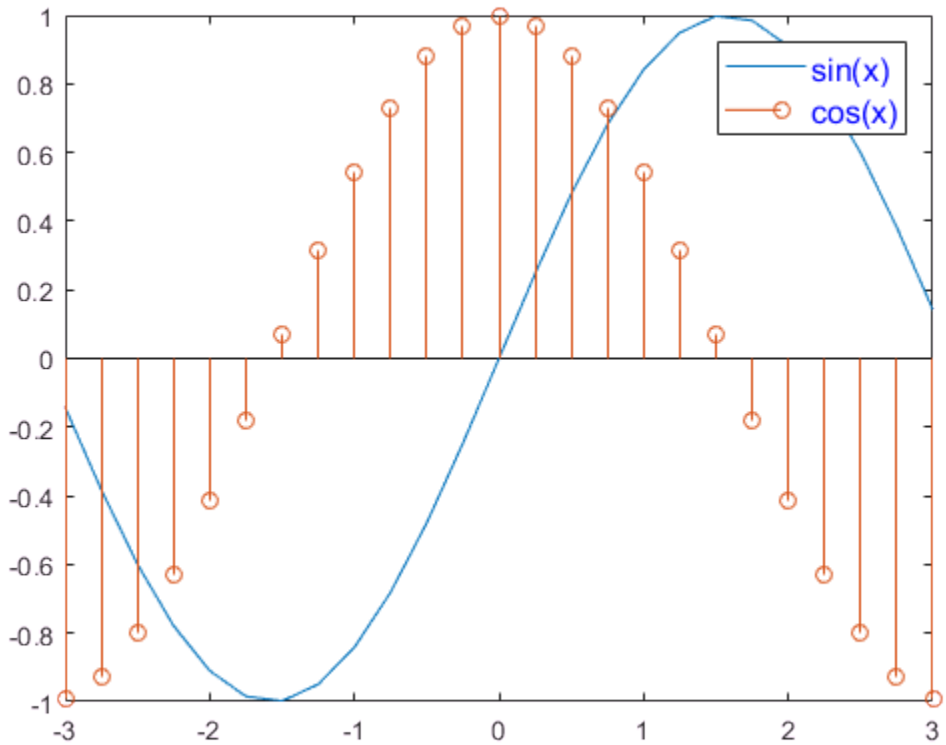

Modify Existing Legend

Plot a line chart and a stem chart. Add a legend to the axes and assign the legend object to the variable `lgd`. Then, use `lgd` to modify properties of the legend after it is created.

```
x = linspace(-3,3,25);
y1 = sin(x);
plot(x,y1,'DisplayName','sin(x)')
```

```
hold on
y2 = cos(x);
stem(x,y2,'DisplayName','cos(x)')
hold off

lgd = legend('show');
lgd.FontSize = 12;
lgd.TextColor = 'blue';
```

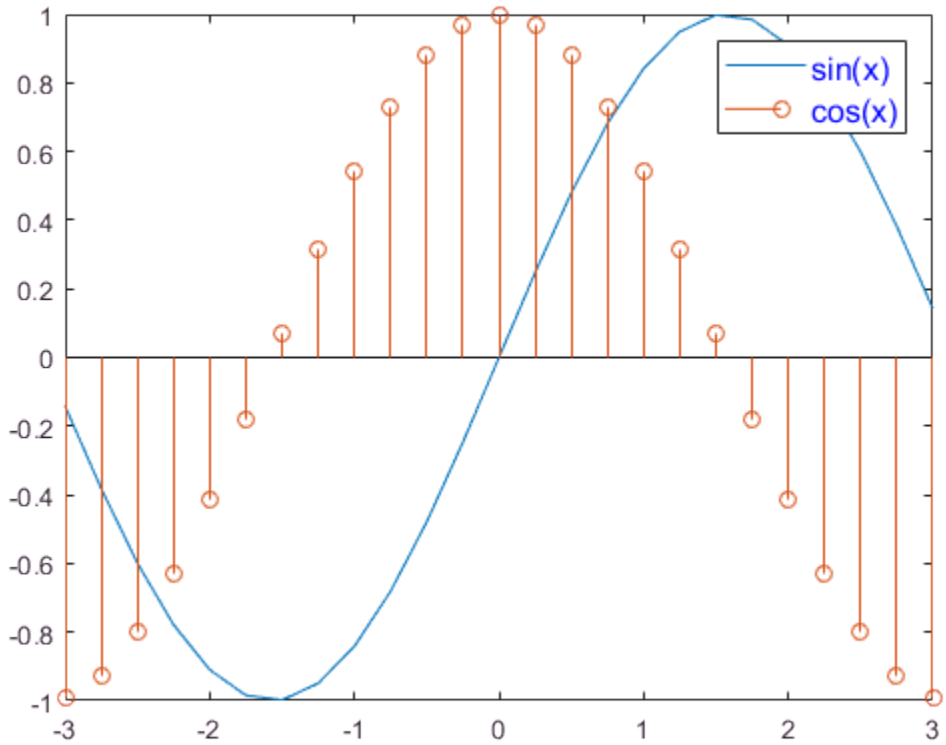

Remove Legend Background

Create a stem chart and a line chart. Add a legend to the lower left corner of the axes. Then, remove the legend background and outline.

```
x = linspace(0,2*pi,50);
y1 = sin(x);
stem(x,y1,'DisplayName','sin(x)')

hold on
y2 = cos(x);
plot(x,y2,'DisplayName','cos(x)')
hold off

legend('Location','southwest')
legend('boxoff')
```

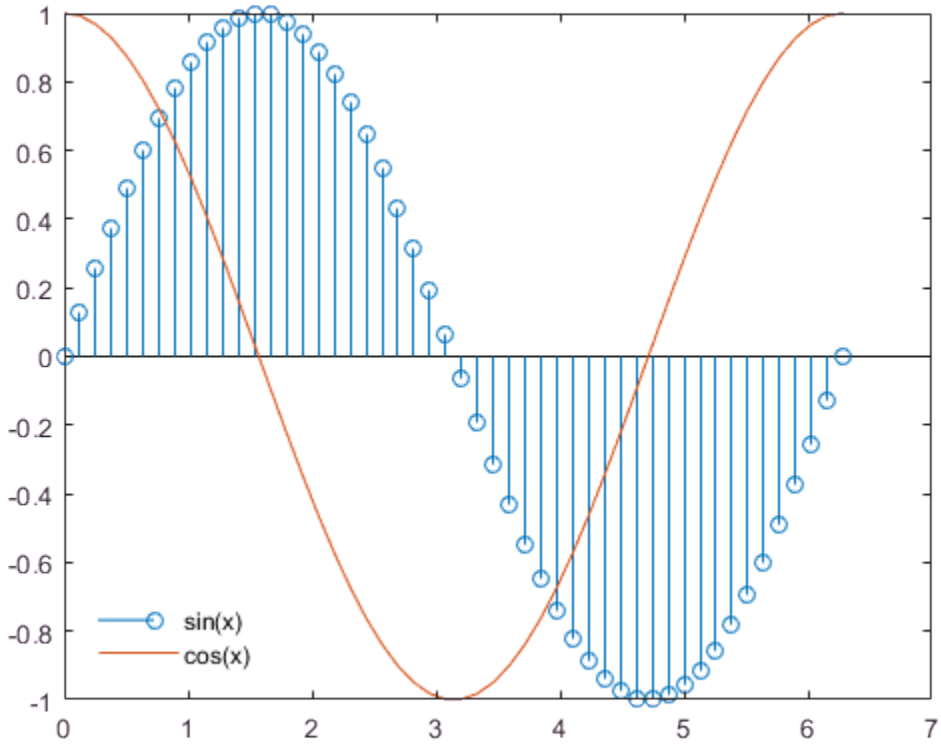

Delete Legend

Create a chart with a legend. Then, delete the legend.

```
plot(rand(3))
legend('line 1','line 2','line 3')
```

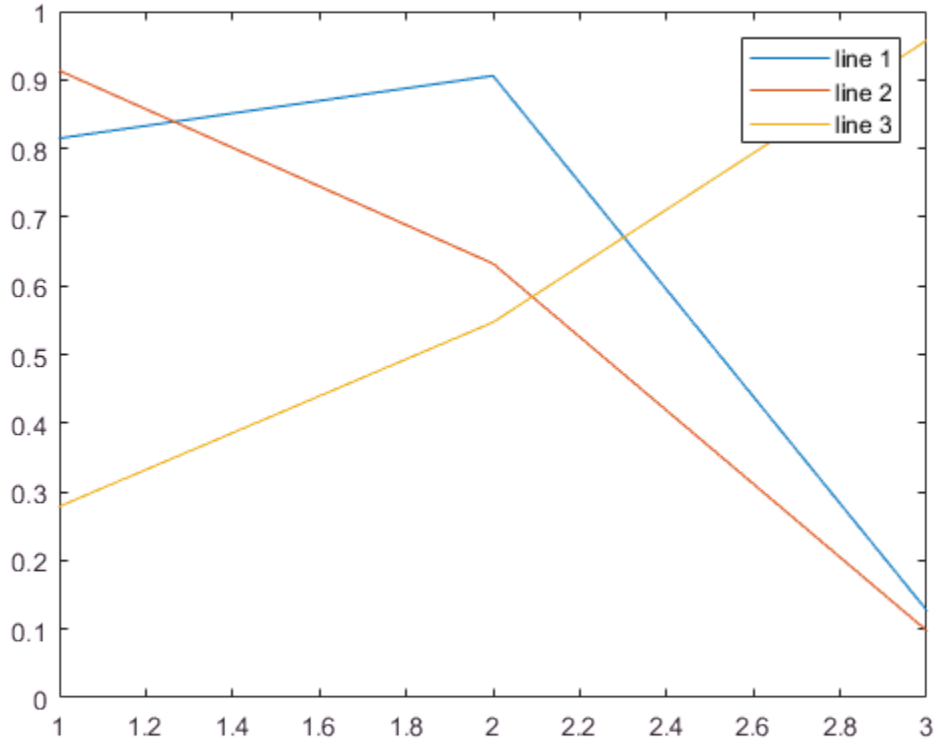


```
legend('off')
```

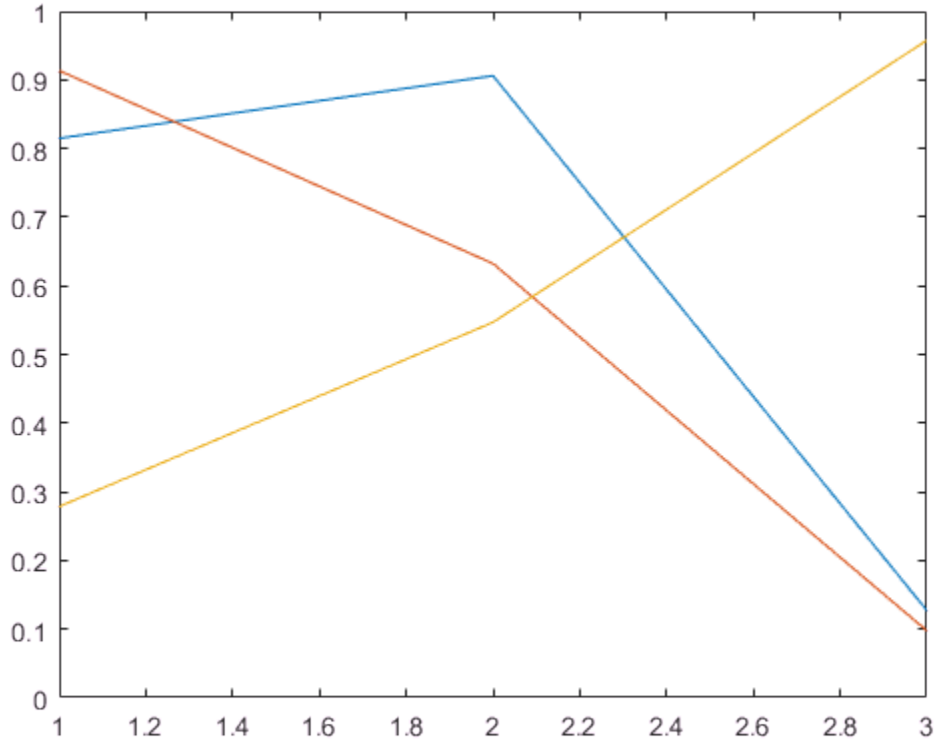

- "Exclude Objects from Graph Legend"
- "Specify Legend Descriptions During Line Creation"

Input Arguments

`label1,...,labelN` — Label for each graphics object (as separate arguments)
character vectors

Label for each graphics object, specified as separate arguments of character vectors. To include special characters or Greek letters in the labels, use TeX markup. For a table

of options, see the `Interpreter` property. To specify labels that are keywords, such as `'Location'` or `'off'`, use a cell array of character vectors or a character array.

Example: `legend('Sin Function','Cos Function')`

Example: `legend('\gamma','\sigma')`

`labels` — Label for each graphics object (as an array)

cell array of character vectors | character array

Label for each graphics object, specified as a cell array of character vectors or a character array. To include special characters or Greek letters in the labels, use TeX markup. For a table of options, see the `Interpreter` property.

Example: `legend({'Sin Function','Cos Function'})`

Example: `legend(['Sin Function';'Cos Function'])`

Example: `legend({'\gamma','\sigma'})`

`subset` — Subset of graphics object to include in legend

vector

Subset of graphics object to include in the legend, specified as a vector.

`target` — Target for legend

`Axes` object | `PolarAxes` object

Target for legend, specified as an `Axes` object, or a `PolarAxes` object.

If you do not specify the target, then the `legend` function uses the axes or chart returned by the `gca` command.

Note: Some charts do not support all legend options, such as modifying the legend appearance or returning the `Legend` object as an output argument.

`lcn` — Legend location

`'north'` | `'south'` | `'east'` | `'west'` | `'northeast'` | ...

Legend location with respect to the axes, specified as one of the location values listed in this table.

Value	Description
`'north'`	Inside top of axes
`'south'`	Inside bottom of axes
`'east'`	Inside right of axes
`'west'`	Inside left of axes
`'northeast'`	Inside top-right of axes (default for 2-D axes)
`'northwest'`	Inside top-left of axes
`'southeast'`	Inside bottom-right of axes
`'southwest'`	Inside bottom-left of axes
`'northoutside'`	Above the axes
`'southoutside'`	Below the axes
`'eastoutside'`	To the right of the axes
`'westoutside'`	To the left of the axes
`'northeastoutside'`	Outside top-right corner of the axes (default for 3-D axes)
`'northwestoutside'`	Outside top-left corner of the axes
`'southeastoutside'`	Outside bottom-right corner of the axes
`'southwestoutside'`	Outside bottom-left corner of the axes
`'best'`	Inside axes where least conflict occurs with plot data
`'bestoutside'`	To the right of the axes
`'none'`	Determined by `Position` property. Use the `Position` property to display the legend in a custom location.

Example: `legend('Location','northeastoutside')`

`ornt` — Orientation
`'vertical'` (default) | `'horizontal'`

Orientation, specified as one of these values:

- `'vertical'` — Stack the legend items vertically.
- `'horizontal'` — List the legend items side-by-side.

Example: `legend('Orientation','horizontal')`

`boxOption` — Display of legend background
`'boxon'` (default) | `'boxoff'`

Display of legend background, specified as one of these values:

- `'boxon'` — Display the legend background and outline.
- `'boxoff'` — Do not display the legend background and outline

Example: `legend('boxoff')`

`visibilityOption` — Legend visibility
`'hide'` | `'toggle'`

Legend visibility, specified as one of these values:

- `'hide'` — Hide the legend.
- `'toggle'` — Toggle the legend visibility.

Example: `legend('toggle')`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are only a subset. For a complete list, see Legend Properties.

Example: `legend({'A','B'},'FontSize',12,'TextColor','blue')` creates a legend with blue, 12-point font.

`'TextColor'` — Text color
`[0 0 0]` (default) | RGB triplet | character vector of color name

Text color, specified as an RGB triplet or a character vector of a color name. The default color is black with an RGB triplet value of `[0 0 0]`.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 0.5]`

Example: `'blue'`

`'FontSize'` — Font size

`9` (default) | scalar value greater than zero

Font size, specified as a scalar value greater than zero in point units. If you change the axes font size, then MATLAB automatically sets the font size of the `legend` object to 90% of the axes font size. If you manually set the `legend` object font size, then changing the axes font size does not affect the `legend` object.

`'Interpreter'` — Interpretation of text characters

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value in point units to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Font color — Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`

Modifier	Description	Example
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒
`\lambda`	λ	`\Phi`	Φ	`\downarrow`	↓
`\mu`	μ	`\Psi`	Ψ	`\circ`	°
`\nu`	ν	`\Omega`	Ω	`\pm`	±
`\xi`	ξ	`\forall`	∀	`\geq`	≥
`\pi`	π	`\exists`	∃	`\propto`	∝
`\rho`	ρ	`\ni`	∋	`\partial`	∂
`\sigma`	σ	`\cong`	≅	`\bullet`	•
`\varsigma`	ς	`\approx`	≈	`\div`	÷

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

Output Arguments

`lgd` — `Legend` object

`Legend` object

`Legend` object. Use `lgd` to view or modify properties of the legend after it is created.

```
plot(rand(3))
lgd = legend('line1','line2','line3');
lgd.FontSize = 12;
lgd.FontWeight = 'bold';
```

Note: Starting in R2014b, the `legend` function returns a `Legend` object. For earlier releases, it returns an `Axes` object.

`icons` — Objects used to create legend icons and labels

`Text`, `Patch`, and `Line` objects

Objects used to create the legend icons and labels, returned as `Text`, `Patch`, and `Line` objects.

Note: This output argument is not recommended.

`plots` — Objects plotted in axes

vector of graphics objects

Objects plotted in the axes, returned as a vector of graphics objects.

Note: This output argument is not recommended.

`txt` — Text used for legend labels

cell array of character vectors

Text used for legend labels, returned as a cell array of character vectors.

Note: This output argument is not recommended. Instead, access the labels using the String property of the legend.

Definitions

Compatibility Considerations

Starting in R2017a, the legend automatically updates when you add or remove plots from the axes. If you do not want the legend to automatically update, set the AutoUpdate property of the legend to `'off'`.

Tips

- An `Axes` object can have only one legend. If a legend exists, then the `legend` function updates the existing legend. Recalling the `legend` function does not reset legend properties, such as the location or orientation.
- The legend reflects the visibility of graphics objects in the axes. Graphics objects that have a `Visible` property set to `'off'` appear as grayed out items in the legend.
- To label more than 20 objects in the legend, specify a label for each object. Otherwise, `legend` depicts only the first 20 objects in the graph.

See Also

See Also

Functions

`hold` | `plot` | `text` | `title` | `xlabel` | `ylabel`

Properties

Legend Properties

Topics

"Exclude Objects from Graph Legend"
"Specify Legend Descriptions During Line Creation"

Introduced before R2006a

Legend Properties

Control legend appearance and behavior

Description

`Legend` properties control the appearance and behavior of a `Legend` object. By changing property values, you can modify certain aspects of the legend. Use dot notation to refer to a particular object and property:

```
plot(rand(3))
lgd = legend('a','b','c');
c = lgd.TextColor;
lgd.TextColor = 'red';
```

Appearance

`TextColor` — Text color

`[0 0 0]` (default) | RGB triplet | character vector of color name

Text color, specified as an RGB triplet or a character vector of a color name. The default color is black with an RGB triplet value of `[0 0 0]`.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `[0 0 0.5]`

Example: `'blue'`

`Color` — Background color

`[1 1 1]` (default) | RGB triplet | character vector of color name

Background color, specified as an RGB triplet or a character vector of a color name. The default color is white with an RGB triplet value of `[1 1 1]`.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `legend({'A','B'},'Color','y')`

Example: `legend({'A','B'},'Color',[0.8 0.8 1])`

`Box` — Display of box outline

`'on'` (default) | `'off'`

Display of box outline, specified as one of these values:

- `'on'` — Display the box around the legend.
- `'off'` — Do not display the box around the legend.

Example: `legend({'A','B'},'Box','off')`

`EdgeColor` — Color of box outline

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector of color name

Color of box outline, specified as an RGB triplet or a character vector of a color name. The default color is dark gray with an RGB triplet value of `[0.15 0.15 0.15]`.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `legend({'A','B'},'EdgeColor',[0 1 0])`

`LineWidth` — Width of box outline

`0.5` (default) | positive value

Width of box outline, specified as a positive value in point units. One point equals 1/72 inches.

Example: `1.5`

Location and Size

`Location` — Location with respect to axes

`'north'` | `'south'` | `'east'` | `'west'` | `'northeast'` | ...

Location with respect to the axes, specified as one of the location values listed in this table.

Value	Description
`'north'`	Inside top of axes
`'south'`	Inside bottom of axes
`'east'`	Inside right of axes
`'west'`	Inside left of axes
`'northeast'`	Inside top-right of axes (default for 2-D axes)
`'northwest'`	Inside top-left of axes
`'southeast'`	Inside bottom-right of axes
`'southwest'`	Inside bottom-left of axes
`'northoutside'`	Above the axes
`'southoutside'`	Below the axes
`'eastoutside'`	To the right of the axes
`'westoutside'`	To the left of the axes
`'northeastoutside'`	Outside top-right corner of the axes (default for 3-D axes)
`'northwestoutside'`	Outside top-left corner of the axes
`'southeastoutside'`	Outside bottom-right corner of the axes
`'southwestoutside'`	Outside bottom-left corner of the axes
`'best'`	Inside axes where least conflict with data in plot
`'bestoutside'`	To the right of the axes
`'none'`	Determined by `Position` property. Use the `Position` property to specify a custom location.

Example: `legend('Location','northeastoutside')`

`Orientation` — Orientation

`'vertical'` (default) | `'horizontal'`

Orientation, specified as one of these values:

- `'vertical'` — Stack the legend items vertically.
- `'horizontal'` — List the legend items side-by-side.

Example: `legend('Orientation','horizontal')`

`Position` — Custom location and size
four-element vector

Custom location and size, specified as a four-element vector of the form `[left bottom width height]`. The first two values, `left` and `bottom`, specify the distance from the lower left corner of the figure to the lower left corner of the legend. The last two values, `width` and `height`, specify the legend dimensions. The `Units` property determines the position units.

If you specify the `Position` property, then MATLAB automatically changes the `Location` property to `'none'`.

Example: `legend({'A','B'},'Position',[0.2 0.6 0.1 0.2])`

`Units` — Position units
`'normalized'` (default) | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

Units	Description
`'normalized'` (default)	Normalized with respect to the container, which is usually the figure. The lower left corner of the figure maps to `(0,0)` and the upper right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.

Units	Description
'pixels'	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units are measured from the lower-left corner of the container window.

This property affects the `Position` property. If you change the units, then it is good practice to return it to its default value after completing your computation to prevent affecting other functions that assume `Units` is the default value.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the object, then the order of specification matters. If you want to define the position with particular units, then you must set the `Units` property before the `Position` property.

Text

`AutoUpdate` — Automatic update of legend items to reflect current status

`'on'` (default) | `'off'`

Automatic update of legend items to reflect current status, specified as one of these values:

- `'on'` — Automatically add legend items for new graphics objects added to the axes. Remove legend items for graphics objects deleted from the axes.
- `'off'` — Do not automatically add or delete legend items.

Example: `legend({'A','B'},'AutoUpdate','off')`

`String` — Text for legend labels

cell array of character vectors | string array

Text for legend labels, specified as a cell array of character vectors or a string array.

`Interpreter` — Interpretation of text characters
`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value	`'\fontsize{15} text'`

Modifier	Description	Example
	in point units to change the font size.	
`\color{specifier}`	Font color — Set `specifier` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒
`\lambda`	λ	`\Phi`	Φ	`\downarrow`	↓
`\mu`	μ	`\Psi`	Ψ	`\circ`	°

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

`Title` — Legend title

legend text object

Legend title, returned as a legend text object. To add a legend title, set the `String` property of the legend text object. To change the title appearance, such as the font style or color, set legend text properties. For a list, see Legend Text Properties.

```
plot(rand(3));
lgd = legend('line 1','line 2','line 3');
lgd.Title.String = 'My Legend Title';
lgd.Title.FontSize = 12;
```

Alternatively, use the `title` function to add a title and control the appearance.

```
plot(rand(3));
lgd = legend('line 1','line 2','line 3');
title(lgd,'My Legend Title','FontSize',12)
```

Font Style

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font might look the same as the normal font.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

`FontName` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`FontSize` — Font size

9 (default) | scalar value greater than zero

Font size, specified as a scalar value greater than zero in point units. If you change the axes font size, then MATLAB automatically sets the font size of the `Legend` object to 90% of the axes font size. If you manually set the `Legend` object font size, then changing the axes font size does not affect the `Legend` object.

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

Identifiers

`Type` — Type of graphics object

`'legend'` (default)

This property is read-only.

Type of graphics object, returned as `'legend'`. Use this property to find all objects of a given type within a plotting hierarchy.

`Tag` — User-specified tag

`'legend'` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Parent/Child

`Parent` — Parent

figure object | uipanel object | uitab object

Parent, specified as a figure object, uipanel object, or a uitab object.

The `Legend` object must have the same parent as the associated axes. If you change the parent of the associated axes, then the `Legend` object automatically updates to use the same parent.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ItemHitFcn` — Callback that executes when you click legend items

`@defaultItemHitCallback` (default) | function handle | cell array | character vector

Callback that executes when you click legend items, specified as one of these values:

- Function handle. For example, `@myCallback`.
- Cell array containing a function handle and additional arguments. For example, `{@myCallback,arg3}`.
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended).

If you specify this property using a function handle, then MATLAB passes the `Legend` object and an event data structure as the first and second input arguments to the function. This table describes the fields in the event data structure.

Event Data Structure Fields

Field	Description
`Peer`	Chart object associated with the clicked legend item.
`Region`	Region of legend item clicked, returned as either `'icon'` or `'label'`.
`SelectionType`	Type of click, returned as one of these values: • `'normal'` — Single-click left mouse button • `'extend'` — **Shift** + single-click left mouse button • `'open'` — Double-click any mouse button • `'alt'` — Single-click right mouse button, both mouse buttons (Windows and Mac), or middle mouse button (Mac and Linux). If the `UIContextMenu` property contains a valid context menu (which is the default), then this type of click opens the context menu instead of triggering the `ItemHitFcn` callback.
`Source`	`Legend` object.
`EventName`	Event name, `'ItemHit'`.

For an example using this property, see “Create Interactive Legends Using Callbacks”.

Note: If you set the `ButtonDownFcn` property, then the `ItemHitFcn` property is disabled.

ButtonDownFcn — Mouse-click callback

`@bdowncb` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

UIContextMenu — Context menu

uicontextmenu object (default)

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Legend` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. The `HitTest` property determines if the `Legend` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Legend` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Legend` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Legend` object. If you have defined the `UIContextMenu` property, then invoke the context menu.

- `'off'` — Trigger the callbacks for the nearest ancestor of the `Legend` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Legend` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'off'` (default) | `'on'`

Callback interruption, specified as `'off'` or `'on'`. The `Interruptible` property determines if a running callback can be interrupted.

If the `ButtonDownFcn` callback of the legend is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'off'` — The running callback cannot be interrupted. MATLAB finishes executing the running callback without any interruptions. This is the default behavior.
- `'on'` — The running callback can be interrupted. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the

`BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

Example: `'off'`

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Legend` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments

- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`legend`

Topics
"Access Property Values"
"Graphics Object Properties"

Legend Text Properties

Control legend text appearance and behavior

Description

Legend text properties control the appearance and behavior of the legend title. By changing property values, you can modify certain aspects of the title. Use dot notation to refer to a particular object and property:

```
l = legend('show');
l.Title.String = 'My Title';
l.Title.Color = 'red';
c = l.Title.Color
```

Text

`String` — Text to display as title

character array | string array | cell array | numeric value

Text to display as title, specified as a character array, string array, cell array, or numeric value.

Example: `'my title'`

Example: `string('my title')`

Example: `{'first line','second line'}`

Example: `123`

To include numeric variables with text in a title, use the `num2str` function. For example:

```
x = 42;
str = ['The value is ',num2str(x)];
```

To include special characters, such as superscripts, subscripts, Greek letters, or mathematical symbols, use TeX markup. For a list of supported markup, see the `Interpreter` property.

To create multiline titles:

- Use a string array, where each element contains a line of text, such as `string({'line one','line two'})`.
- Use a cell array where each cell contains a line of text, such as `{'first line','second line'}`.
- Use a character array where each row contains a line of text, such as `['abc'; 'ab ']`. If you use this technique, each row must contain the same number of characters.
- Use `sprintf` to create text with a new line character, such as `sprintf('first line \n second line')`.

Numeric titles are converted to text using `sprintf('%g',value)`. For example, `12345678` displays as `1.23457e+07`.

Note: The words `default`, `factory`, and `remove` are reserved words that will not appear in a title when quoted as a normal character vector. To display any of these words individually, precede them with a backslash, such as `'\default'` or `'\remove'`.

`Interpreter` — Interpretation of text characters

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value in point units to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Font color — Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\ast	*	\chi	χ	\infty	∞
\beta	β	\psi	ψ	\clubsuit	♣
\gamma	γ	\omega	ω	\diamondsuit	♦
\delta	δ	\Gamma	Γ	\heartsuit	♥
\epsilon	ε	\Delta	Δ	\spadesuit	♠
\zeta	ζ	\Theta	Θ	\leftrightarrow	↔
\eta	η	\Lambda	Λ	\leftarrow	←
\theta	θ	\Xi	Ξ	\Leftarrow	⇐
\vartheta	ϑ	\Pi	Π	\uparrow	↑
\iota	ι	\Sigma	Σ	\rightarrow	→
\kappa	κ	\Upsilon	ϒ	\Rightarrow	⇒
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\lfloor	⌊	\times	x	\ldots	…
\perp	⊥	\surd	√	\prime	′
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

`InterpreterMode` — Selection mode for `Interpreter`

`'auto'` (default) | `'manual'`

Selection mode for the `Interpreter` property, specified as one of these values:

- `'auto'` — Use the same value as the `Interpreter` property for the associated `Legend` object.
- `'manual'` — Use a value of `Interpreter` that you specify. To specify the value, set the `Interpreter` property. When you set the `Interpreter` property, the `InterpreterMode` property changes to `'manual'`.

Font Style and Appearance

`Color` — Text color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. The default color is black with an RGB triplet value of `[0 0 0]`. If you set the color to `'none'`, then the text is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`ColorMode` — Selection mode for `Color`

`'auto'` (default) | `'manual'`

Selection mode for the `Color` property, specified as one of these values:

- `'auto'` — Use the same value as the `TextColor` property for the associated `Legend` object.
- `'manual'` — Use a value of `Color` that you specify. To specify the value, set the `Color` property. When you set the `Color` property, the `ColorMode` property changes to `'manual'`.

FontAngle — Character slant

'normal' (default) | 'italic'

Character slant, specified as 'normal' or 'italic'. Not all fonts have both font styles. Therefore, the italic font might look the same as the normal font.

Note: The 'oblique' value has been removed. Use 'italic' instead.

FontAngleMode — Selection mode for FontAngle

'auto' (default) | 'manual'

Selection mode for the FontAngle property, specified as one of these values:

- 'auto' — Use the same value as the FontAngle property for the associated Legend object.
- 'manual' — Use a value of FontAngle that you specify. To specify the value, set the FontAngle property. When you set the FontAngle property, the FontAngleMode property changes to 'manual'.

FontName — Font name

system supported font name | 'FixedWidth'

Font name, specified as the name of the font to use or 'FixedWidth'. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use 'FixedWidth'. The 'FixedWidth' value relies on the root FixedWidthFontName property. Setting the root FixedWidthFontName property causes an immediate update of the display to use the new font.

Example: 'Cambria'

FontNameMode — Selection mode for FontName

'auto' (default) | 'manual'

Selection mode for the FontName property, specified as one of these values:

- 'auto' — Use the same value as the FontName property for the associated Legend object.

- `'manual'` — Use a value of `FontName` that you specify. To specify the value, set the `FontName` property. When you set the `FontName` property, the `FontNameMode` property changes to `'manual'`.

`FontSize` — Font size

`9` (default) | scalar value greater than zero

Font size, specified as a scalar value greater than zero in point units. If you change the axes font size, then MATLAB automatically sets the font size of the `Legend Text` object to 90% of the axes font size. If you manually set the `Legend Text` object font size, then changing the axes font size does not affect the `Legend Text` object.

`FontSizeMode` — Selection mode for `FontSize`

`'auto'` (default) | `'manual'`

Selection mode for the `FontSize` property, specified as one of these values:

- `'auto'` — Use the same value as the `FontSize` property for the associated `Legend` object.
- `'manual'` — Use a value of `FontSize` that you specify. To specify the value, set the `FontSize` property. When you set the `FontSize` property, the `FontSizeMode` property changes to `'manual'`.

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

`FontWeightMode` — Selection mode for `FontWeight`

`'auto'` (default) | `'manual'`

Selection mode for the `FontWeight` property, specified as one of these values:

- `'auto'` — Use the same value as the `FontWeight` property for the associated `Legend` object.
- `'manual'` — Use a value of `FontWeight` that you specify. To specify the value, set the `FontWeight` property. When you set the `FontWeight` property, the `FontWeightMode` property changes to `'manual'`.

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

See Also

See Also

`legend` | `title`

Introduced in R2016a

legendre

Associated Legendre functions

Syntax

```
P = legendre(n,X)
S = legendre(n,X,'sch')
N = legendre(n,X,'norm')
```

Description

`P = legendre(n,X)` computes the associated Legendre functions of degree `n` and order `m = 0,1,...,n`, evaluated for each element of `X`. Argument `n` must be a positive integer, and `X` must contain real values in the domain $-1 \le x \le 1$.

If `X` is a vector, then `P` is an `(n+1)`-by-`q` matrix, where `q = length(X)`. Each element `P(m+1,i)` corresponds to the associated Legendre function of degree `n` and order `m` evaluated at `X(i)`.

In general, the returned array `P` has one more dimension than `X`, and each element `P(m+1,i,j,k,...)` contains the associated Legendre function of degree `n` and order `m` evaluated at `X(i,j,k,...)`. Note that the first row of `P` is the Legendre polynomial evaluated at `X`, i.e., the case where `m` = 0.

`S = legendre(n,X,'sch')` computes the "Schmidt Seminormalized Associated Legendre Functions" on page 1-6443.

`N = legendre(n,X,'norm')` computes the "Fully Normalized Associated Legendre Functions" on page 1-6443.

Examples

Example 1

The statement `legendre(2,0:0.1:0.2)` returns the matrix

	x = 0	x = 0.1	x = 0.2
m = 0	-0.5000	-0.4850	-0.4400
m = 1	0	-0.2985	-0.5879
m = 2	3.0000	2.9700	2.8800

Example 2

Given,

```
X = rand(2,4,5);
n = 2;
P = legendre(n,X)
```

then

```
size(P)
ans =
     3     2     4     5
```

and

```
P(:,1,2,3)
ans =
   -0.2475
   -1.1225
    2.4950
```

is the same as

```
legendre(n,X(1,2,3))
ans =
   -0.2475
   -1.1225
    2.49501
```

Definitions

Associated Legendre Functions

The Legendre functions are defined by

$$P_n^m(x) = (-1)^m (1 - x^2)^{m/2} \frac{d^m}{dx^m} P_n(x),$$

where

$$P_n(x)$$

is the Legendre polynomial of degree n:

$$P_n(x) = \frac{1}{2^n n!} \left[\frac{d^n}{dx^n} (x^2 - 1)^n \right]$$

Schmidt Seminormalized Associated Legendre Functions

The Schmidt seminormalized associated Legendre functions are related to the nonnormalized associated Legendre functions $P_n^m(x)$ by

$$P_n(x) \text{ for } m = 0,$$
$$S_n^m(x) = (-1)^m \sqrt{\frac{2(n-m)!}{(n+m)!}} P_n^m(x) \text{ for } m > 0.$$

Fully Normalized Associated Legendre Functions

The fully normalized associated Legendre functions are normalized such that

$$\int_{-1}^{1} \left(N_n^m(x) \right)^2 dx = 1$$

and are related to the unnormalized associated Legendre functions $P_n^m(x)$ by

$$N_n^m = (-1)^m \sqrt{\frac{(n + \frac{1}{2})(n-m)!}{(n+m)!}} P_n^m(x)$$

Algorithms

`legendre` uses a three-term backward recursion relationship in `m`. This recursion is on a version of the Schmidt seminormalized associated Legendre functions $Q_n^m(x)$, which are complex spherical harmonics. These functions are related to the standard Abramowitz and Stegun [1] functions $P_n^m(x)$ by

$$P_n^m(x) = \sqrt{\frac{(n+m)!}{(n-m)!}}\, Q_n^m(x)$$

They are related to the Schmidt form given previously by

$$m = 0: \quad S_n^m(x) = Q_n^0(x)$$
$$m > 0: \quad S_n^m(x) = (-1)^m \sqrt{2}\, Q_n^m(x)$$

References

[1] Abramowitz, M. and I. A. Stegun, *Handbook of Mathematical Functions*, Dover Publications, 1965, Ch.8.

[2] Jacobs, J. A., *Geomagnetism*, Academic Press, 1987, Ch.4.

Introduced before R2006a

length

Length of largest array dimension

Syntax

```
L = length(X)
```

Description

`L = length(X)` returns the length of the largest array dimension in `X`. For vectors, the length is simply the number of elements. For arrays with more dimensions, the length is `max(size(X))`. The length of an empty array is zero.

Examples

Number of Vector Elements

Find the length of a uniformly spaced vector in the interval `[5,10]`.

```
v = 5:10
```

```
v =

     5     6     7     8     9    10
```

```
L = length(v)
```

```
L = 6
```

Length of Rectangular Matrix

Find the length of a 3-by-7 matrix of zeros.

```
X = zeros(3,7);
L = length(X)
```

```
L = 7
```

Length of Structure Fields

Create a structure with fields for `Day` and `Month`. Use the `structfun` function to apply `length` to each field.

```
S = struct('Day',[1 13 14 26],'Month',{{'Jan','Feb', 'Mar'}})
```

```
S = struct with fields:
      Day: [1 13 14 26]
    Month: {'Jan'  'Feb'  'Mar'}
```

```
L = structfun(@(field) length(field),S)
```

```
L =

     4
     3
```

Input Arguments

X — Input array

numeric array | character array | logical array | structure | cell array | categorical array | datetime array | duration array | calendarDuration array

Input array, specified as a numeric array, character array, logical array, structure, cell array, categorical array, datetime array, duration array, or calendarDuration array.

`length` does not operate on tables. To examine the dimensions of a table, use the `height`, `width`, or `size` functions.

Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`ndims` | `numel` | `size`

Introduced before R2006a

length

Class: containers.Map
Package: containers

Length of `containers.Map` object

Syntax

```
mapLength = length(mapObj)
```

Description

`mapLength = length(mapObj)` returns the number of key-value pairs in `mapObj`.

Input Arguments

`mapObj`

Object of class containers.Map.

Output Arguments

`mapLength`

Scalar numeric value that indicates the number of key-value pairs in `mapObj`. This number is equivalent to `size(mapObj,1)` and to `mapObj.Count`.

Examples

Determine the Length of a Map

Create a map, and determine the number of key-value pairs:

```
myKeys = {'a','b','c'};
myValues = [1,2,3];
mapObj = containers.Map(myKeys,myValues);

mapLength = length(mapObj)
```

This code returns

```
mapLength =

     3
```

See Also

isKey | keys | values | containers.Map | size

length (serial)

Length of serial port object array

Syntax

```
length(obj)
```

Description

`length(obj)` returns the length of the serial port object, `obj`. It is equivalent to the command `max(size(obj))`.

See Also

`size`

Introduced before R2006a

length (tscollection)

Length of time vector

Syntax

```
length(tsc)
```

Description

`length(tsc)` returns an integer that represents the length of the time vector for the `tscollection` object `tsc`.

See Also

`tscollection` | `isempty (tscollection)` | `size (tscollection)`

Introduced before R2006a

libfunctions

Return information on functions in shared library

Syntax

```
libfunctions libname
```

```
m = libfunctions(libname)
m = libfunctions(libname,'-full')
```

Description

`libfunctions libname` displays names of functions defined in library, `libname`. If you called `loadlibrary` using the `alias` option, then you must use the alias name for the `libname` argument.

`m = libfunctions(libname)` returns names of functions in cell array `m`.

`m = libfunctions(libname,'-full')` returns function signatures.

Examples

Display Functions in `shrlibsample` Library

Add path to `examples` folder.

```
addpath(fullfile(matlabroot,'extern','examples','shrlib'))
```

Display functions in library.

```
if not(libisloaded('shrlibsample'))
    loadlibrary('shrlibsample')
end
libfunctions('shrlibsample')
```

```
Functions in library shrlibsample:
```

```
addDoubleRef              addMixedTypes             addStructByRef            addStruct
```

Clean up.

```
unloadlibrary shrlibsample
```

Input Arguments

`libname` — Name of shared library

character vector

Name of shared library, specified as a character vector. Do not include the path or file extension in `libname`.

If you call `loadlibrary` using the `alias` option, then you must use the alias name for the `libname` argument.

Data Types: `char`

Output Arguments

`m` — Function names

cell array

Functions names, returned as a cell array.

Limitations

- Use with libraries that are loaded using the `loadlibrary` function.

See Also

See Also

`calllib` | `libfunctionsview` | `loadlibrary`

Introduced before R2006a

libfunctionsview

Display shared library function signatures in window

Syntax

```
libfunctionsview libname
```

Description

`libfunctionsview libname` displays information about functions in library, `libname`, in a new window.

Input Arguments

`libname` — Name of shared library

character vector

Name of shared library, specified as a character vector. Do not include the path or file extension in `libname`.

If you call `loadlibrary` using the `alias` option, then you must use the alias name for the `libname` argument.

Data Types: `char`

Limitations

- Use with libraries that are loaded using the `loadlibrary` function.

Examples

Display Function Signatures for Library libmx

```
if not(libisloaded('libmx'))
```

```
  hfile = fullfile(matlabroot,'extern','include','matrix.h');
  loadlibrary('libmx',hfile)
end
libfunctionsview libmx
```

MATLAB creates a new window displaying function signatures.

See Also

`libfunctions` | `calllib`

Introduced before R2006a

libisloaded

Determine if shared library is loaded

Syntax

```
tf = libisloaded(libname)
```

Description

`tf = libisloaded(libname)` returns logical `1` (`true`) if the shared library, `libname`, is loaded. Otherwise, it returns logical `0` (`false`).

Examples

Load and Unload shrlibsample Library

Add the `shrlib` examples folder to the path.

```
addpath(fullfile(matlabroot,'extern','examples','shrlib'))
```

Load the library, if it is not already loaded.

```
if ~libisloaded('shrlibsample')
   loadlibrary('shrlibsample')
end
```

When finished, unload the library to free memory.

```
unloadlibrary shrlibsample
```

Input Arguments

`libname` — Name of shared library
character vector

Name of shared library, specified as a character vector. Do not include the path or file extension in `libname`.

If you call `loadlibrary` using the `alias` option, then you must use the alias name for the `libname` argument.

Data Types: `char`

See Also

See Also

`loadlibrary` | `unloadlibrary`

Introduced before R2006a

libpointer

Pointer object for use with shared library

Syntax

```
p = libpointer
p = libpointer(DataType)
p = libpointer(DataType,Value)
```

Description

`p = libpointer` creates `NULL` pointer `p` of type `voidPtr`.

`p = libpointer(DataType)` creates `NULL` pointer of specified `DataType`.

`p = libpointer(DataType,Value)` creates pointer initialized to a copy of `Value`.

Examples

Create NULL Pointer for string Argument

```
p = libpointer('string');
```

- "Pass Pointers"

Input Arguments

`DataType` — Type of pointer

character vector

Type of pointer, specified as a character vector, of any MATLAB numeric type, structure defined in the library, or enumeration defined in the library. For a list of valid MATLAB numeric types, refer to these tables in "C and MATLAB Equivalent Types".

- MATLAB Primitive Types
- MATLAB Extended Types

Example: `'int16Ptr'`

Data Types: `char`

`Value` — Value for pointer object
any valid value

Value, specified as any valid value for given type.

Limitations

- Use with libraries that are loaded using the `loadlibrary` function.

Tips

- This is an advanced feature for experienced C programmers. MATLAB automatically converts data passed to and from external library functions to the data type expected by the external function. Use a `lib.pointer` object instead of automatic conversion in the following situations.
  - You want to modify the data in the input arguments.
  - You are passing large amounts of data, and you want to control when MATLAB makes copies of the data.
  - The library stores and uses the pointer for a period of time so you want the MATLAB function to control the lifetime of the `lib.pointer` object.

See Also

See Also
lib.pointer | `calllib` | `libstruct`

Topics
"Pass Pointers"

"Pointer Arguments"

Introduced before R2006a

lib.pointer class

Package: lib

Pointer object compatible with C pointer

Description

MATLAB automatically converts arguments passed by reference to a function in an external library. Use a pointer object instead of automatic conversion in the following situations.

- The function modifies data in an input argument.
- You are passing large amounts of data, and you want to control when MATLAB makes copies of the data.
- The library stores and uses the pointer, so you want the MATLAB function to control the lifetime of the `lib.pointer` object.

Construction

To create a `lib.pointer` object, use the MATLAB `libpointer` function.

A library function can return a `lib.pointer` object. Use the `setdatatype` method to convert the argument manually to use in MATLAB.

Properties

`DataType`

Type of pointer, specified as a character vector, of any MATLAB numeric type, structure defined in the library, or enumeration defined in the library. For a list of valid MATLAB numeric types, refer to these tables in “C and MATLAB Equivalent Types”.

- MATLAB Primitive Types
- MATLAB Extended Types

`Value`

Value, specified as any valid value for given type.

Methods

disp	Display lib.pointer type
isNull	Points to NULL pointer
plus	+ (plus) operator for pointer arithmetic
reshape	Reshape lib.pointer array
setdatatype	Initialize type and size of lib.pointer object

Examples

Create Pointer

Create a pointer `pv` of type `int16` initialized to `485`.

```
pv = libpointer('int16Ptr',485);
```

Display the properties of `pv`.

```
get(pv)
```

```
       Value: 485
    DataType: 'int16Ptr'
```

Definitions

A passed-by-reference argument in the function signature has type names ending with `Ptr` or `PtrPtr`.

See Also

See Also

`libpointer`

Topics

"Pointer Arguments"

Introduced before R2006a

disp

Class: lib.pointer
Package: lib

Display lib.pointer type

Syntax

```
disp(h)
```

Description

`disp(h)` displays type for `lib.pointer` object, `h`.

Input Arguments

`h` — `lib.pointer` object.
handle

`lib.pointer` object, specified as a handle.

Examples

Display lib.pointer Type

Create a `double` pointer set to `15`.

```
xp = libpointer('doublePtr',15);
```

Display pointer data type.

```
disp(xp)
```

```
libpointer
```

See Also

isNull

Class: lib.pointer
Package: lib

Points to NULL pointer

Syntax

```
tf = isNull(h)
```

Description

`tf = isNull(h)` returns true if `h` is a `lib.pointer` object.

Input Arguments

`h` — `lib.pointer` object.
handle

`lib.pointer` object, specified as a handle.

Examples

Create Null lib.pointer Object

```
nullp = libpointer('doublePtr',[]);
isNull(nullp)
```

```
ans = logical
   1
```

See Also

plus

Class: lib.pointer
Package: lib

+ (plus) operator for pointer arithmetic

Syntax

```
hout = plus(h,offset)
hout = h + offset
```

Description

`hout = plus(h,offset)` returns pointer `hout`. Pointer `hout` is valid only as long as the original pointer, `h`, exists.

`hout = h + offset` is an alternative syntax.

Input Arguments

`h` — `lib.pointer` object.
handle

`lib.pointer` object, specified as a handle.

`offset` — Scalar increment
`uint64`

Scalar increment, specified as `uint64`, from `h`.

See Also

Topics
"Iterate Through an Array"

reshape

Class: lib.pointer
Package: lib

Reshape lib.pointer array

Syntax

```
reshape(h,xdim,ydim)
```

Description

`reshape(h,xdim,ydim)` creates an `xdim`-by-`ydim` matrix from `lib.pointer` object `h`.

Input Arguments

`h` — `lib.pointer` object.
handle

`lib.pointer` object, specified as a handle.

`xdim` — Size of x dimension
double

Size of x dimension, specified as `double`.

`ydim` — Size of y dimension
double

Size of y dimension, specified as `double`.

See Also

setdatatype

Class: lib.pointer
Package: lib

Initialize type and size of lib.pointer object

Syntax

```
setdatatype(h,type,size)
```

Description

`setdatatype(h,type,size)` sets data type, `type`, of `size`, to `lib.pointer`, `h`.

Input Arguments

`h` — `lib.pointer` object.
handle

`lib.pointer` object, specified as a handle.

`type` — Data type
character vector

Data type, specified as a character vector.

`size` — Size
vector of double

Size, specified as a vector of `double`.

Examples

Set Size and Type of lib.pointer Output Variable

Load the `shrlibsample` library.

```
if ~libisloaded('shrlibsample')
  addpath(fullfile(matlabroot,'extern','examples','shrlib'))
  loadlibrary('shrlibsample')
end
```

The `multDoubleRef` function takes a scalar value specified as `doubleptr`. Create variable `xp` as a `lib.pointer` object, and call the function.

```
xp = libpointer('doublePtr',99);
[xobj,xval] = calllib('shrlibsample','multDoubleRef',xp);
```

To use the variable `xobj`, set its size and data type.

```
setdatatype(xobj,'doublePtr',1,1)
xobj.Value
```

```
ans = 495
```

See Also

Topics

"Pass Arguments to Shared Library Functions"

libstruct

Convert MATLAB structure to C-style structure for use with shared library

Syntax

```
S = libstruct(structtype)
S = libstruct(structtype,mlstruct)
```

Description

`S = libstruct(structtype)` creates `NULL` pointer to MATLAB `libstruct` object `S`.

`S = libstruct(structtype,mlstruct)` creates pointer initialized to `mlstruct`.

Examples

Call Function with `c_struct` Input Argument

Call the `addStructFields` function by creating a variable of type `c_struct`.

Load the `shrlibsample` library in the *`matlabroot`*`\extern\examples\shrlib` folder, which contains the `c_struct` type.

```
if ~libisloaded('shrlibsample')
   addpath(fullfile(matlabroot,'extern','examples','shrlib'))
   loadlibrary('shrlibsample')
end
```

Display function signatures for `shrlibsample` and search the list for the `addStructFields` entry.

```
libfunctionsview shrlibsample
```

```
double addStructFields(c_struct)
```

The input argument is a pointer to a `c_struct` data type.

Create a MATLAB structure, `sm`.

```
sm.p1 = 476;   sm.p2 = -299;   sm.p3 = 1000;
```

Construct a `libstruct` object `sc` from the `c_struct` type.

```
sc = libstruct('c_struct',sm)
```

The fields of `sc` contain the values of the MATLAB structure, `sm`.

Call the `addStructFields` function.

```
calllib('shrlibsample','addStructFields',sc)
```

```
ans =
    1177
```

To clean up, first clear the `libstruct` object, and then unload the library.

```
clear sc
unloadlibrary shrlibsample
```

- "Shared Library shrlibsample"

Input Arguments

`structtype` — C structure
structure

C structure defined in shared library.

`mlstruct` — MATLAB structure
structure

MATLAB structure used to initialize the fields in `S`.

Data Types: `struct`

Output Arguments

`S` — Pointer
MATLAB `libstruct` object

Pointer, returned as MATLAB `libstruct` object.

Limitations

- Use with libraries that are loaded using the `loadlibrary` function.
- You can only use the `libstruct` function on scalar structures.
- When converting a MATLAB structure to a `libstruct` object, the structure must adhere to the requirements listed in "Structure Argument Requirements".

Tips

- If a function in the shared library has a structure argument, use `libstruct` to create the argument. The `libstruct` function creates a C-style structure that you pass to functions in the library. You handle this structure in MATLAB as you would a true MATLAB structure.

See Also

See Also

`libfunctionsview` | `loadlibrary`

Topics

"Shared Library shrlibsample"
"Structure Arguments"

Introduced before R2006a

license

Get license number or perform licensing task

Syntax

```
license
license('inuse')

S = license('inuse')
S = license('inuse',feature)

status = license('test',feature)
license('test',feature,toggle)

[status,errmsg] = license('checkout',feature)
```

Description

`license` returns the license number for this MATLAB product. The return value also can be `'demo'` for a demonstration version of MATLAB, `'student'`, for a student version of MATLAB, or `'unknown'`, if the license number cannot be determined.

`license('inuse')` displays a list of licenses checked out in the current MATLAB session. The product list is alphabetical by license feature name. These names are the same as the valid values for the `feature` input.

`S = license('inuse')` returns an array of structures indicating checked-out licenses and the user name of each person who has a license checked out.

`S = license('inuse',feature)` checks if the product specified by `feature` is checked out in the current MATLAB session. If the product is checked out, then `license` returns the product name and the user name of the person who has it checked out. Otherwise, the fields of `S` are empty.

`status = license('test',feature)` tests if a license exists for the product specified by `feature`.

`license('test',feature,toggle)` enables or disables testing of the product specified by `feature`, depending on the value of `toggle`.

`[status,errmsg] = license('checkout',feature)` checks out a license for the specified product. If you specify the optional second output argument, `errmsg`, then license returns the text of any error message encountered if the checkout is unsuccessful.

Examples

Display Licenses in Use

Display a list of licenses currently being used.

```
license('inuse')
```

```
image_toolbox
map_toolbox
matlab
```

`license` displays a list of products in alphabetical order by the license feature name.

Get Licenses in Use and User Names

Get a list of licenses in use with information about each user.

```
S = license('inuse');
```

`license` returns a structure array.

View the first element of `S`.

```
S(1)
```

```
ans 

    feature: 'image_toolbox'
       user: 'juser'
```

Determine If License Is in Use

Determine if the license for MATLAB is in use.

```
S = license('inuse','MATLAB')
```

```
S 
 
    feature: 'matlab'
       user: 'jsmith'
```

If the license is in use, then S is a structure array with nonempty fields.

Determine If License Exists

Determine if a license exists for Mapping Toolbox™.

```
status = license('test','map_toolbox')
```

```
status =

    1
```

If a license exists, `license` returns `1`.

Check Out License

Check out a license for Control System Toolbox.

```
[status,errmsg] = license('checkout','control_toolbox')
```

```
status =

     1


errmsg =

     ''
```

The `status` output is `1` and the `errmsg` output is empty if the checkout is successful.

Input Arguments

`feature` — License feature name
character vector

License feature name, specified as a character vector. The `INCREMENT` lines in a license file indicate the valid features. To locate your license file, see Where are the license files for MATLAB located?

As an example, this table lists the `feature` value for a few commonly used products.

`feature` Value	MathWorks Product
`'MATLAB'`	MATLAB
`'SIMULINK'`	Simulink
`'Control_Toolbox'`	Control System Toolbox™
`'Curve_Fitting_Toolbox'`	Curve Fitting Toolbox™
`'Signal_Blocks'`	DSP System Toolbox™
`'Image_Toolbox'`	Image Processing Toolbox
`'Optimization_Toolbox'`	Optimization Toolbox™
`'Distrib_Computing_Toolbox'`	Parallel Computing Toolbox
`'Signal_Toolbox'`	Signal Processing Toolbox
`'Stateflow'`	Stateflow®
`'Statistics_Toolbox'`	Statistics and Machine Learning Toolbox
`'Symbolic_Toolbox'`	Symbolic Math Toolbox™

Values of `feature` are not case-sensitive.

`toggle` — Ability to test product license
`'enable' | 'disable'`

Ability to test the existence of a product license, specified as either `'enable'` or `'disable'`.

- If `toggle` is `'enable'`, then the syntax, `license('test',feature)` returns `1` when the product license exists and `0` when the product license does not exist.
- If `toggle` is `'disable'`, then the syntax, `license('test',feature)` always returns `0` (product license does not exist) for the specified product.

Note Disabling a test for a particular product can affect other tests for the existence of the license, not just tests performed by the `license` command.

Output Arguments

`S` — Checked out products
array of structures

Checked out products, returned as an array of structures, where each structure represents a checked-out license. The structures contain two fields:

- `feature` — license feature name
- `user` — user name of the person who has the license checked out

If the fields are empty, then the product is not currently checked out.

`status` — Test or checkout status
`1` | `0`

Test or checkout status, returned as `1` or `0`.

- When testing for the existence of a license, `1` indicates that the license exists, and `0` indicates that the license does not exist.

  The existence of a license does not necessarily mean that the license can be checked out or that the product is installed. `status` is `1` even if the license has expired or if a system administrator has excluded you from using the product.
- When checking out a license, `1` indicates that the checkout is successful, and `0` indicates that the `license` function could not check out a license.

`errmsg` — Error message
character vector

Error message for unsuccessful license checkout, returned as a character vector. If the checkout is successful, then `errmsg` is empty.

See Also

See Also
`isstudent`

Topics

"Manage Your Licenses"

Introduced before R2006a

light

Create light

Syntax

```
light('PropertyName',propertyvalue,...)
light(ax,...)
handle = light(...)
```

Properties

For a list of properties, see Light Properties.

Description

`light` creates a light in the current axes. Lights affect only patch and surface objects.

`light('PropertyName',propertyvalue,...)` creates a `Light` object using the specified values for the named properties. For a description of the properties, see Light Properties. The MATLAB software parents the light to the current axes unless you specify another axes with the `Parent` property.

`light(ax,...)` creates the light in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`handle = light(...)` returns the `Light` object created.

Examples

Light the `peaks` surface plot with a local light source oriented along the direction defined by the vector `[-1 0 0]`, that is, looking from `0` along the positive x-axis.

```
surf(peaks,'FaceLighting','gouraud','FaceColor','interp',...
```

```
      'AmbientStrength',0.5)
light('Position',[-1 0 0],'Style','local')
```

Tutorials

For more information about lighting, see “Lighting Overview”.

Tips

You cannot see a `Light` object *per se*, but you can see the effects of the light source on patch and surface objects. You can also specify an axes-wide ambient light color that illuminates these objects. However, ambient light is visible only when at least one `Light` object is present and visible in the axes.

You can specify properties as property name/property value pairs, structure arrays, and cell arrays (see `set` and `get` for examples of how to specify these data types).

See also the Patch Properties and Primitive Surface Properties `AmbientStrength`, `DiffuseStrength`, `SpecularStrength`, `SpecularExponent`, `SpecularColorReflectance`, and `VertexNormals` properties. Also see the `lighting` and `material` commands.

See Also

`lighting` | `patch` | `material` | `surface`

Introduced before R2006a

Light Properties

Control light appearance and behavior

Description

`Light` properties control the appearance and behavior of `Light` objects. By changing property values, you can modify certain aspects of the light.

Starting in R2014b, you can use dot notation to query and set properties.

```
h = light;
c = h.Color;
h.Style = 'local';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Color, Position, and Style

`Color` — Color of light

`[1 1 1]` (default) | RGB triplet | character vector of color name

Color of light, specified as an RGB triplet or a character vector of a color name. The default RGB triplet of `[1 1 1]` corresponds to white.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`

Long Name	Short Name	RGB Triplet
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'green'`

`Position` — Location of light source

`[1 0 1]` (default) | three-element vector of the form `[x y z]`

Location of light source, specified as a three-element vector of the form `[x y z]`. Define the vector elements in data units from the axes origin to the (x, y, z) coordinate. The actual location of the light depends on the value of the `Style` property.

Example: `[-40 -4 140]`

`Style` — Type of light source

`'infinite'` (default) | `'local'`

Type of light source, specified as one of these values:

- `'infinite'` — Place the light at infinity. Use the `Position` property to specify the direction from which the light shines in parallel rays.
- `'local'` — Place the light at the location specified by the `Position` property. The light is a point source that radiates from the location in all directions.

Visibility

`Visible` — Visibility of light from light source

`'on'` (default) | `'off'`

Visibility of light from light source, specified as `'on'` or `'off'`.

Identifiers

`Type` — Type of graphics object

`'light'`

This property is read-only.

Type of graphics object, returned as `'light'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

Unused Properties

`ButtonDownFcn` — (unused) Mouse-click callback
`''` (default) | function handle | cell array | character vector

`Light` objects do not use this property.

`UIContextMenu` — (unused) Context menu
uicontextmenu object

`Light` objects do not use this property.

`Selected` — (unused) Selection state
`'off'` (default) | `'on'`

`Light` objects do not use this property.

`SelectionHighlight` — (unused) Display of selection handles when selected
`'on'` (default) | `'off'`

`Light` objects do not use this property.

`PickableParts` — (unused) Ability to capture mouse clicks
`'visible'` (default) | `'none'`

`Light` objects do not use this property.

`HitTest` — (unused) Response to captured mouse clicks
`'on'` (default) | `'off'`

Light objects do not use this property.

`Interruptible` — (unused) Callback interruption
`'on'` (default) | `'off'`

`Light` objects do not use this property.

`BusyAction` — (unused) Callback queuing
`'queue'` (default) | `'cancel'`

`Light` objects do not use this property.

See Also

See Also
`light`

Topics
"Access Property Values"
"Graphics Object Properties"

lightangle

Create or position light object in spherical coordinates

Syntax

```
lightangle(az,el)
light_handle = lightangle(az,el)
lightangle(light_handle,az,el)
[az,el] = lightangle(light_handle)
```

Description

`lightangle(az,el)` creates a light at the position specified by azimuth and elevation. `az` is the azimuthal (horizontal) rotation and `el` is the vertical elevation (both in degrees). The interpretation of azimuth and elevation is the same as that of the `view` command.

`light_handle = lightangle(az,el)` creates a light and returns the handle of the light in `light_handle`.

`lightangle(light_handle,az,el)` sets the position of the light specified by `light_handle`.

`[az,el] = lightangle(light_handle)` returns the azimuth and elevation of the light specified by `light_handle`.

Examples

Move Light Position

Create a surface. Add a light and move the position of the light.

```
surf(peaks)
axis vis3d
h = light;
```

```
for az = -50:10:50
   lightangle(h,az,30)
   pause(.1)
end
```

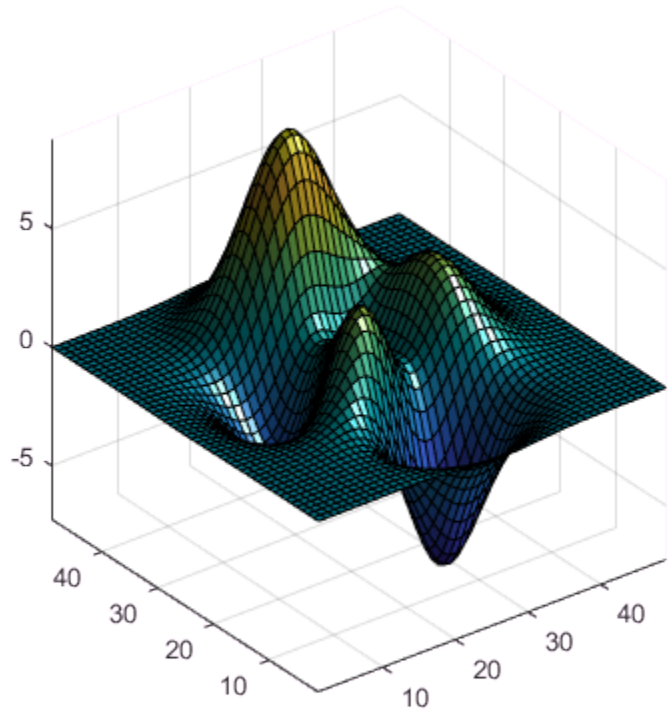

Tips

By default, when a light is created, its style is `infinite`. If the light handle passed in to `lightangle` refers to a local light, the distance between the light and the camera target is preserved as the position is changed.

See Also

`light` | `camlight` | `view`

Topics

"Lighting Overview"

Introduced before R2006a

lighting

Specify lighting algorithm

Syntax

```
lighting flat
lighting gouraud
lighting none
```

Description

`lighting` selects the algorithm used to calculate the effects of `light` objects on all `surface` and `patch` objects in the current axes. In order for the `lighting` command to have any effects, however, you must create a lighting object by using the `light` function.

`lighting flat` produces uniform lighting across each of the faces of the object. Select this method to view faceted objects.

`lighting gouraud` calculates the vertex normals and interpolates linearly across the faces. Select this method to view curved surfaces.

`lighting none` turns off lighting.

Tips

The `surf`, `mesh`, `pcolor`, `fill`, `fill3`, `surface`, and `patch` functions create graphics objects that are affected by light sources. The `lighting` command sets the FaceLighting and EdgeLighting properties of surfaces and patches appropriately for the graphics object.

See Also

`fill` | `fill3` | `light` | `material` | `mesh` | `patch` | `pcolor` | `shading` | `surface`

Topics

"Lighting Overview"

Introduced before R2006a

lin2mu

Convert linear audio signal to mu-law

Syntax

```
mu = lin2mu(y)
```

Description

`mu = lin2mu(y)` converts linear audio signal amplitudes in the range $-1 \le Y \le 1$ to mu-law encoded “flints” in the range $0 \le u \le 255$.

See Also

`mu2lin`

Introduced before R2006a

line

Create primitive line

Syntax

```
line(x,y)
line(x,y,z)
line

line('XData',x,'YData',y)
line('XData',x,'YData',y,'ZData',z)

line( ___ ,Name,Value)
line(ax, ___ )

pl = line( ___ )
```

Description

`line(x,y)` plots a line in the current axes using the data in vectors `x` and `y`. If either `x` or `y`, or both are matrices, then `line` draws multiple lines. The function cycles through colors and line styles based on the `ColorOrder` and `LineStyleOrder` properties of the axes. Unlike the `plot` function, `line` adds the line to the current axes without deleting other graphics objects or resetting axes properties.

`line(x,y,z)` plots a line in three-dimensional coordinates.

`line` draws a line from the point `(0,0)` to `(1,1)` with the default property settings.

`line('XData',x,'YData',y)` is the low-level version of `line(x,y)`. The behavior is the same as `line(x,y)`, except that the line has the default line color. Also, you cannot set `x` or `y` to matrix data.

`line('XData',x,'YData',y,'ZData',z)` is the low-level version of `line(x,y,z)`. The behavior is the same as `line(x,y,z)`, except that the line has the default line color. Also, you cannot set `x`, `y`, or `z` to matrix data.

`line( ___ ,Name,Value)` modifies the appearance of the line using one or more name-value argument pairs. For example, `'LineWidth',3` sets the line width to `3` points. Specify name-value pairs after all other input arguments.

`line(ax, ___ )` creates the line in the axes specified by `ax` instead of in the current axes (`gca`). Specify `ax` as the first input argument.

`pl = line( ___ )` returns all primitive `Line` objects created. Use `pl` to modify properties of a specific `Line` object after it is created. For a list, see Primitive Line Properties.

Examples

Plot Line Using Vector Data

Create `x` and `y` as vectors. Then plot `y` versus `x`.

```
x = linspace(0,10);
y = sin(x);
line(x,y)
```

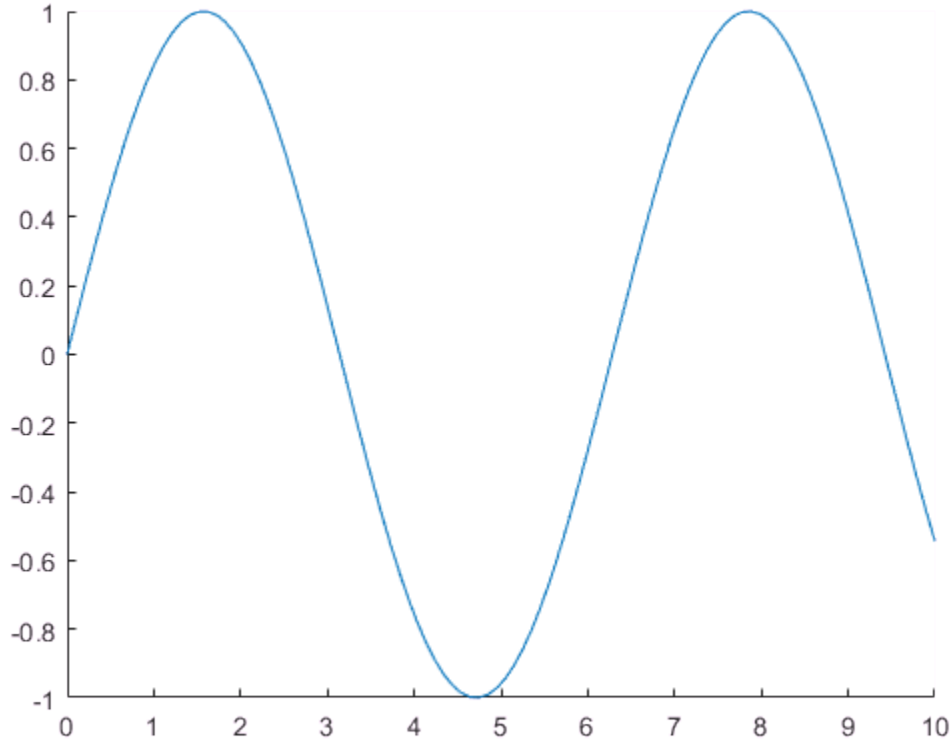

Plot Multiple Lines Using Matrix Data

Plot two lines by specifying `x` and `y` as matrices. Use `line` to plot columns of `y` versus columns of `x` as separate lines.

```
x = linspace(0,10)';
y = [sin(x) cos(x)];
line(x,y)
```

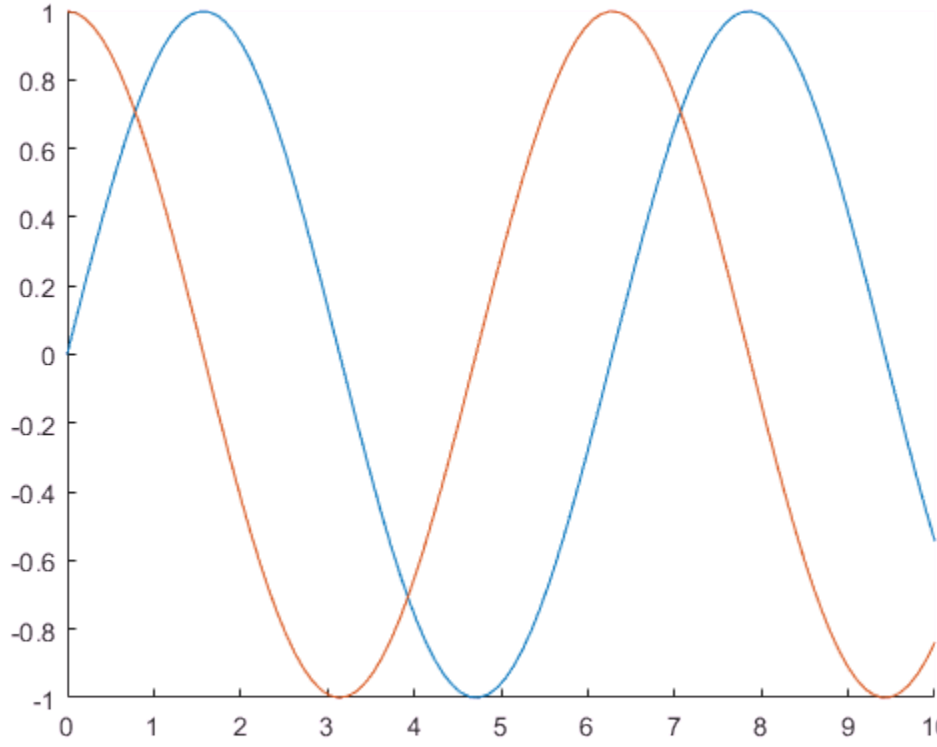

Plot Line with 3-D Coordinates

Plot a line in 3-D coordinates by specifying *x*, *y*, and *z* values. Change the axes to a 3-D view using `view(3)`.

```
t = linspace(0,10*pi,200);
x = sin(t);
y = cos(t);
z = t;
line(x,y,z)
view(3)
```

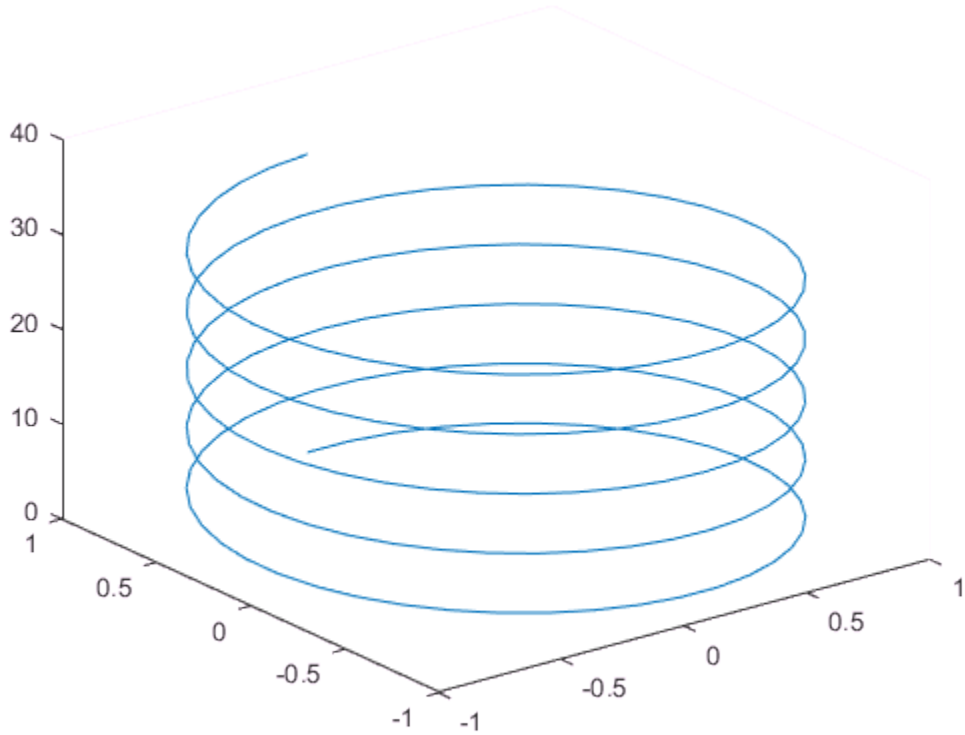

Plot Line Using Low-Level Syntax

Create `x` and `y` as vectors. Then plot `y` versus `x` using the low-level version of the `line` funcion.

```
x = linspace(0,10);
y = sin(x);
line('XData',x,'YData',y)
```

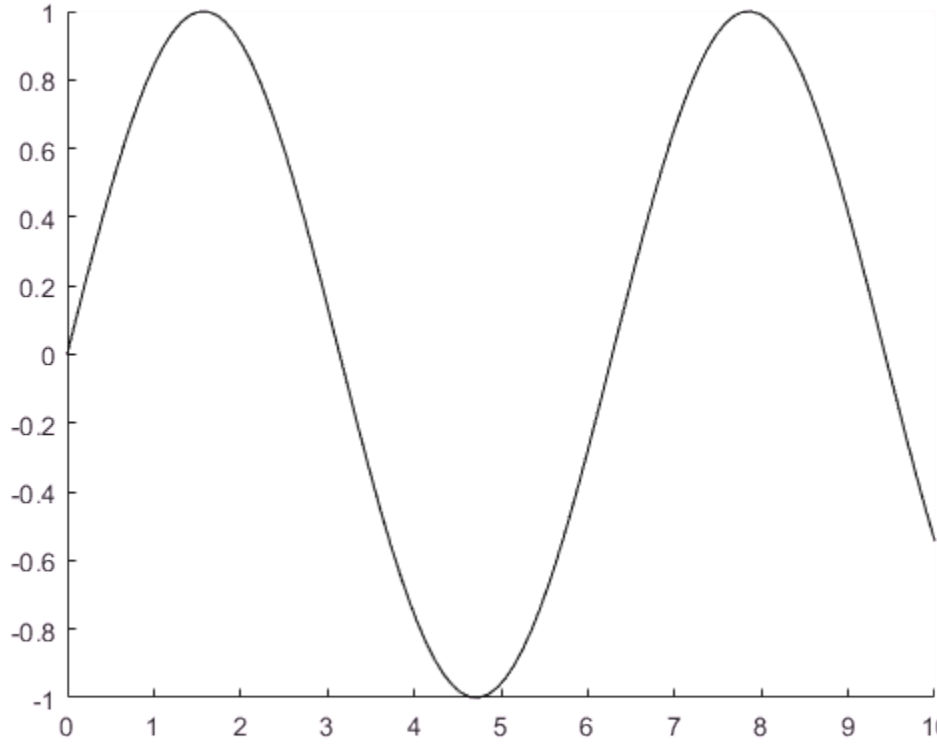

Specify Line Properties

Draw a red, dashed line between the points (1,2) and (9,12). Set the `Color` and `LineStyle` properties as name-value pairs.

```
x = [1 9];
y = [2 12];
line(x,y,'Color','red','LineStyle','--')
```

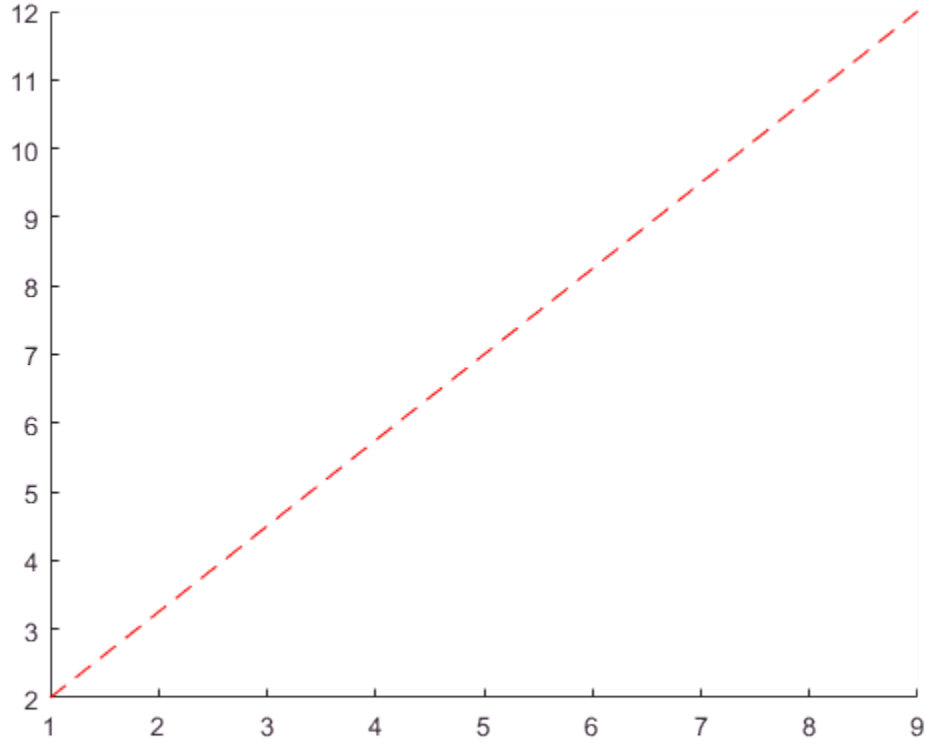

Change Line Properties After Creation

First, draw a line from the point (3,15) to (2,12) and return the `Line` object. Then change the line to a green, dashed line.

Note: Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
x = [3 2];
y = [15 12];
pl = line(x,y);
```

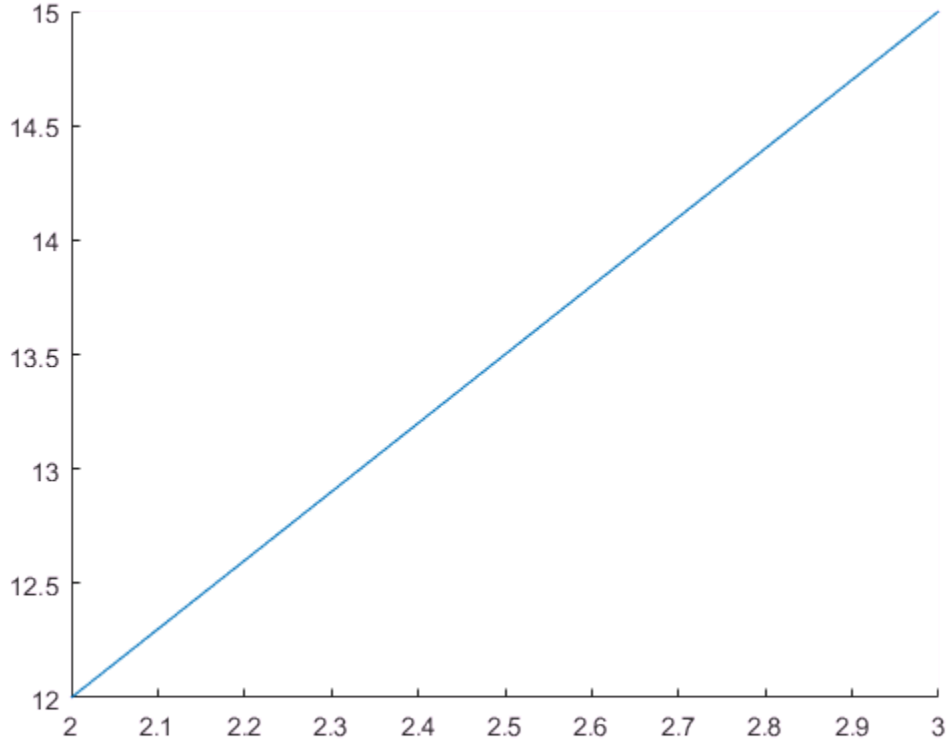


```
pl.Color = 'green';
pl.LineStyle = '--';
```

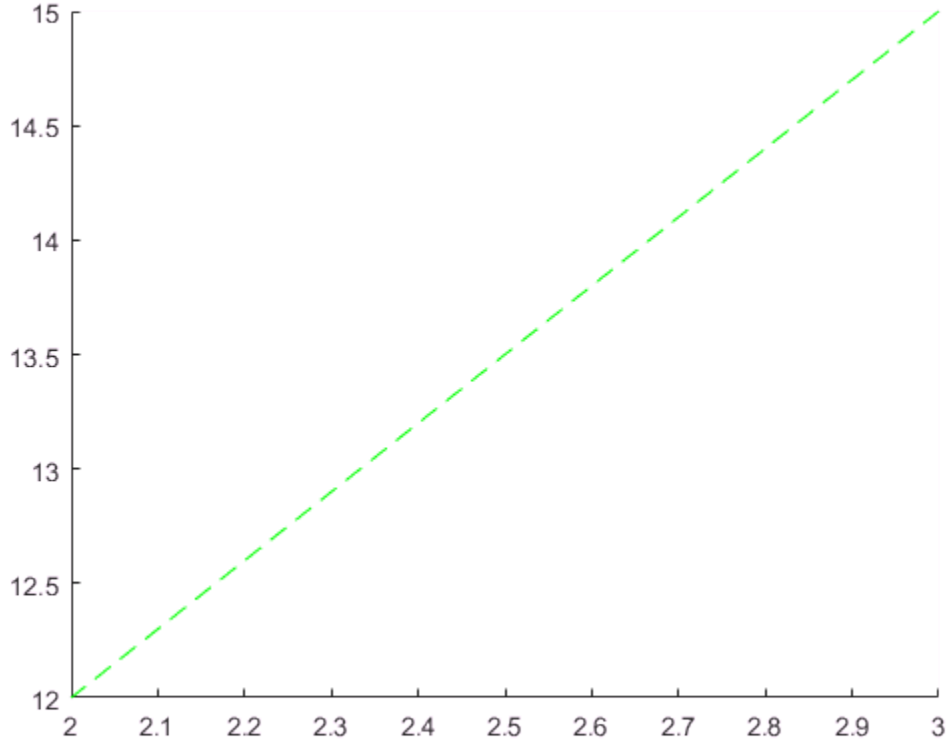

- "Plot Dates and Durations"
- "Plot Categorical Data"

Input Arguments

x — *x* values
vector | matrix

x values, specified as a vector or a matrix.

Example: `x = linspace(0,10,25)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`y` — *y* values

vector | matrix

y values, specified as a vector or a matrix:

- If `x` and `y` are both vectors with the same length, then `line` plots a single line.
- If `x` and `y` are matrices with the same size, then `line` plots multiple lines. The function plots columns of `y` versus `x`.
- If one of `x` or `y` is a vector and the other is a matrix, then `line` plots multiple lines. The length of the vector must equal one of the matrix dimensions:
  - If the vector length equals the number of matrix rows, then `line` plots each matrix column versus the vector.
  - If the vector length equals the number of matrix columns, then `line` plots each matrix row versus the vector.
  - If the matrix is square, then `line` plots each column versus the vector.

Example: `y = sin(x)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`z` — *z* values

vector | matrix

z values, specified as a vector or a matrix:

- If `x`, `y`, and `z` are all vectors with the same length, then `line` plots a single line.
- If `x`, `y`, and `z` are all matrices with the same size, then `line` plots multiple lines using the matrix columns.
- If one or two of `x`, `y`, and `z` is a vector and the others are matrices of the same size, then `line` plots multiple lines. The length of the vector must equal one of the matrix dimensions.

Example: `z = sin(x) + cos(y)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

ax — Axes in which to plot

`Axes` object

Axes in which to plot, specified as an `Axes` object. If you do not specify the axes, then the `line` function plots in the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are only a subset. For a full list, see Primitive Line Properties.

Example: `line(x,y,'Color','red','LineWidth',3)` creates a red line that is 3 points wide.

'Color' — Line color

`[0 0.4470 0.7410]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `line(x,y,'Color','blue')`

Example: `line(x,y,'Color',[0.5 0.5 1])`

`'LineStyle'` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`'Marker'` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'*'` | `...`

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point

Value	Description
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`'MarkerSize'` — Marker size
6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

Output Arguments

`pl` — Primitive line object
primitive line object

Primitive line object. Use `pl` to query or modify properties of the line after it is created. For a list, see Primitive Line Properties.

Tips

- Unlike the `plot` function, the `line` function does not call `newplot` before plotting and does not respect the value of the `NextPlot` property for the figure or axes. It simply adds the line to the current axes without deleting other graphics objects or resetting axes properties. However, some axes properties, such as the axis limits, can update to accommodate the line.

See Also

See Also

Functions

`annotation` | `loglog` | `plot` | `plot3`

Properties

Primitive Line Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

lines

Lines colormap array

Syntax

```
c = lines
c = lines(m)
```

Description

`c = lines` returns the lines colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the array contains 64 rows. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme matches the default `ColorOrder` property of the `Axes`. Thus, you can use this colormap to make your chart colors match the output of the `plot` function.

`c = lines(m)` returns the colormap with `m` colors.

Examples

Downsample the Lines Colormap

Create a scatter plot using the default colors.

```
x = [3.5 3.3 5 6.1 4 2];
y = [14 5.7 12 6 8 9];
sz = 100*[6 100 20 3 15 20];
c = [1 2 3 4 5 6];
scatter(x,y,sz,c,'filled','MarkerEdgeColor','k','MarkerFaceAlpha',.7);
xlim([1 7]);
ylim([1 16]);
```

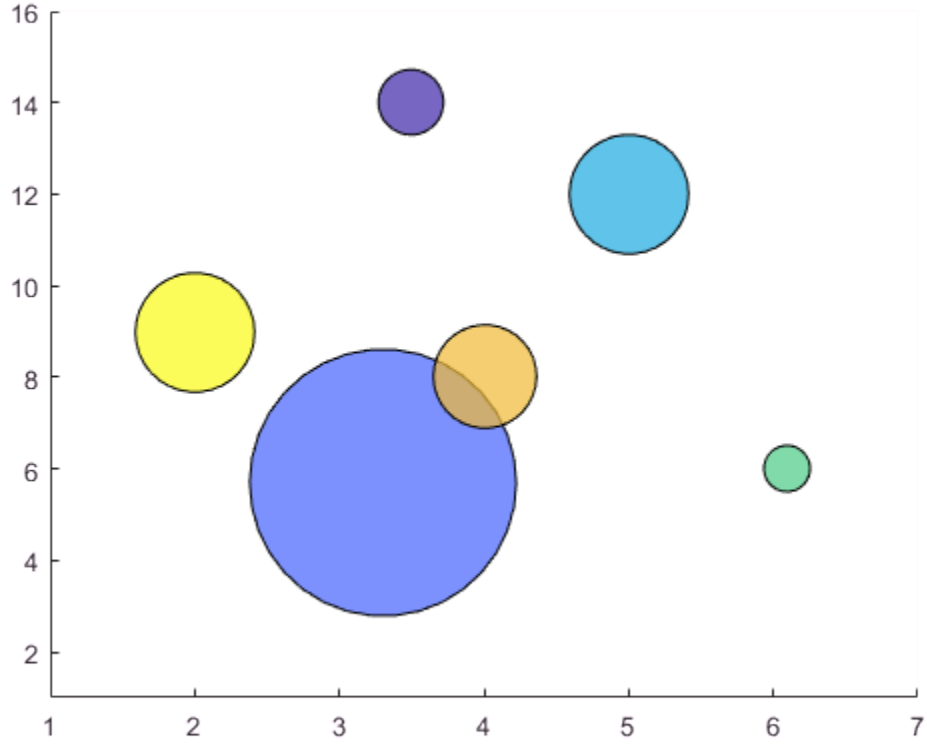

Get the lines colormap array with six entries. Then replace the colormap in the scatter plot.

```
c = lines(6);
colormap(c);
```

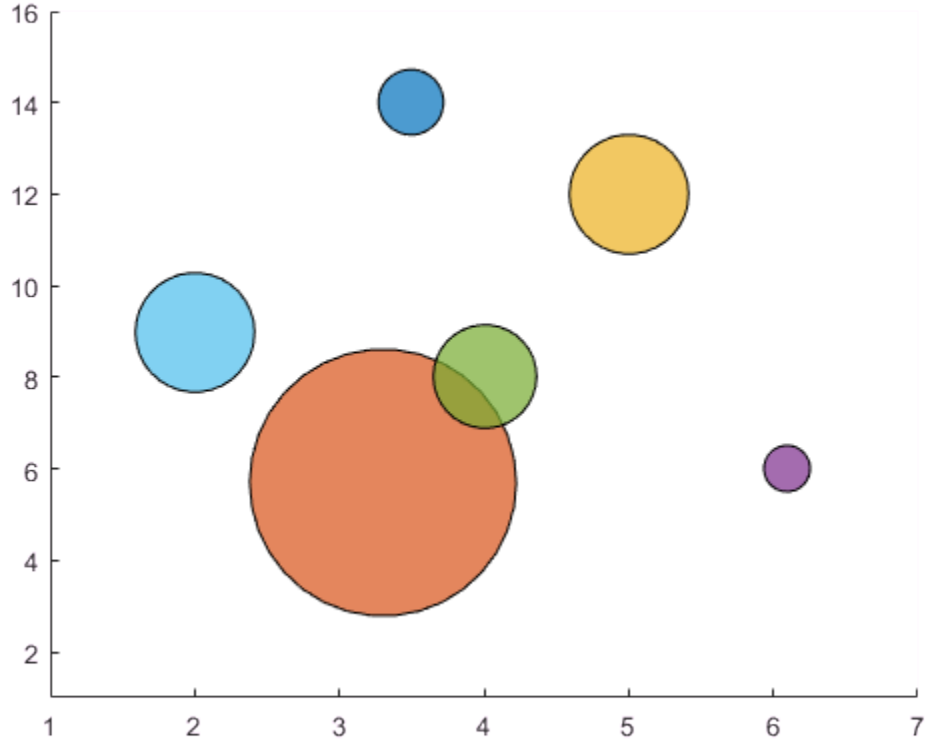

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

LineSpec (Line Specification)

Line specification

Description

Plotting functions accept line specifications as arguments and modify the graph generated accordingly. You can specify these three components:

- Line style
- Marker symbol
- Color

For example:

```
plot(x,y,'-.or')
```

plots `y` versus `x` using a dash-dot line (`-.`), places circular markers (`o`) at the data points, and colors both line and marker red (`r`). Specify the components (in any order) as a character vector after the data arguments. Note that linespecs are not name-value pairs.

Plotting Data Points with No Line

If you specify a marker, but not a line style, only the markers are plotted. For example:

```
plot(x,y,'d')
```

Line Style Specifiers

You indicate the line styles, marker types, and colors you want to display, detailed in the following tables:

Specifier	LineStyle
`'-'`	Solid line (default)
`'--'`	Dashed line

Specifier	LineStyle
':'	Dotted line
'-.'	Dash-dot line

Marker Specifiers

Specifier	Marker Type
'+'	Plus sign
'o'	Circle
'*'	Asterisk
'.'	Point
'x'	Cross
'square' or 's'	Square
'diamond' or 'd'	Diamond
'^'	Upward-pointing triangle
'v'	Downward-pointing triangle
'>'	Right-pointing triangle
'<'	Left-pointing triangle
'pentagram' or 'p'	Five-pointed star (pentagram)
'hexagram' or 'h'	Six-pointed star (hexagram)

Color Specifiers

Specifier	Color
r	Red
g	Green
b	Blue
c	Cyan
m	Magenta

Specifier	Color
y	Yellow
k	Black
w	White

Related Properties

This page also describes how to specify the properties of lines used for plotting. MATLAB graphics give you control over these visual characteristics:

- `LineWidth` — Specifies the width (in points) of the line.
- `MarkerEdgeColor` — Specifies the color of the marker or the edge color for filled markers (circle, square, diamond, pentagram, hexagram, and the four triangles).
- `MarkerFaceColor` — Specifies the color of the face of filled markers.
- `MarkerSize` — Specifies the size of the marker in points (must be greater than 0).

In addition, you can specify the `LineStyle`, `Color`, and `Marker` properties instead of using a line specification character vector. This is useful if you want to specify a color that is not in the list by using RGB triplet values. See Chart Line Properties for details on these properties and `ColorSpec` for more information on color.

Examples

Modify Line Appearance

Plot the sine function over three different ranges using different line styles, colors, and markers.

```
figure
t = 0:pi/20:2*pi;
plot(t,sin(t),'-.r*')
hold on
plot(t,sin(t-pi/2),'--mo')
plot(t,sin(t-pi),':bs')
hold off
```

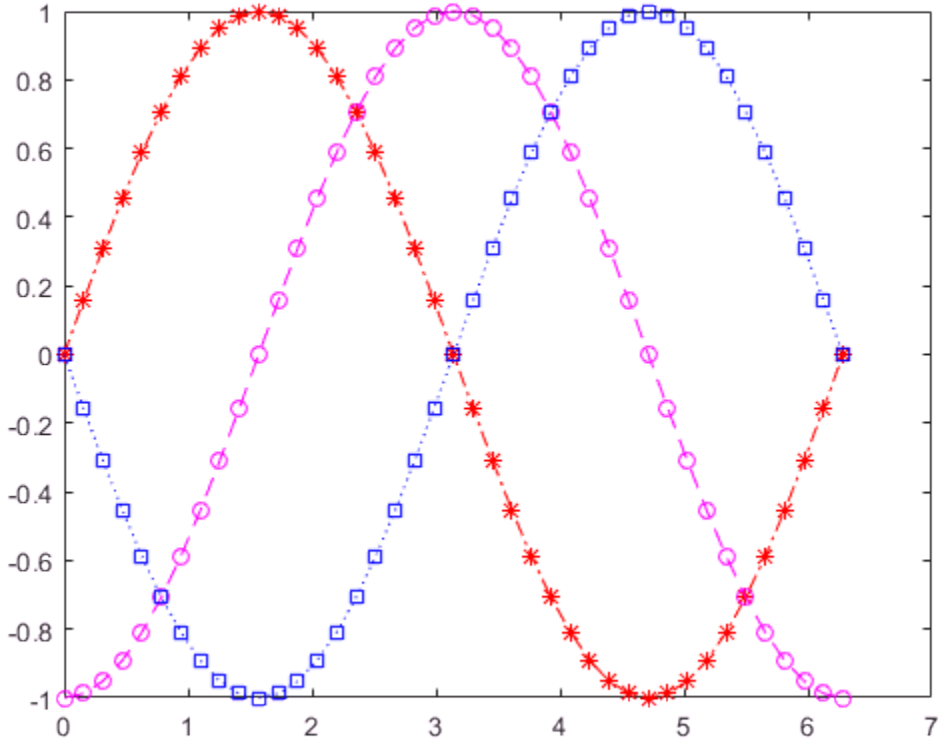

Set Line Properties

Create a plot illustrating how to set line properties.

```
t = 0:pi/20:2*pi;
figure
plot(t,sin(2*t),'-mo',...
    'LineWidth',2,...
    'MarkerEdgeColor','k',...
    'MarkerFaceColor',[.49 1 .63],...
    'MarkerSize',10)
```

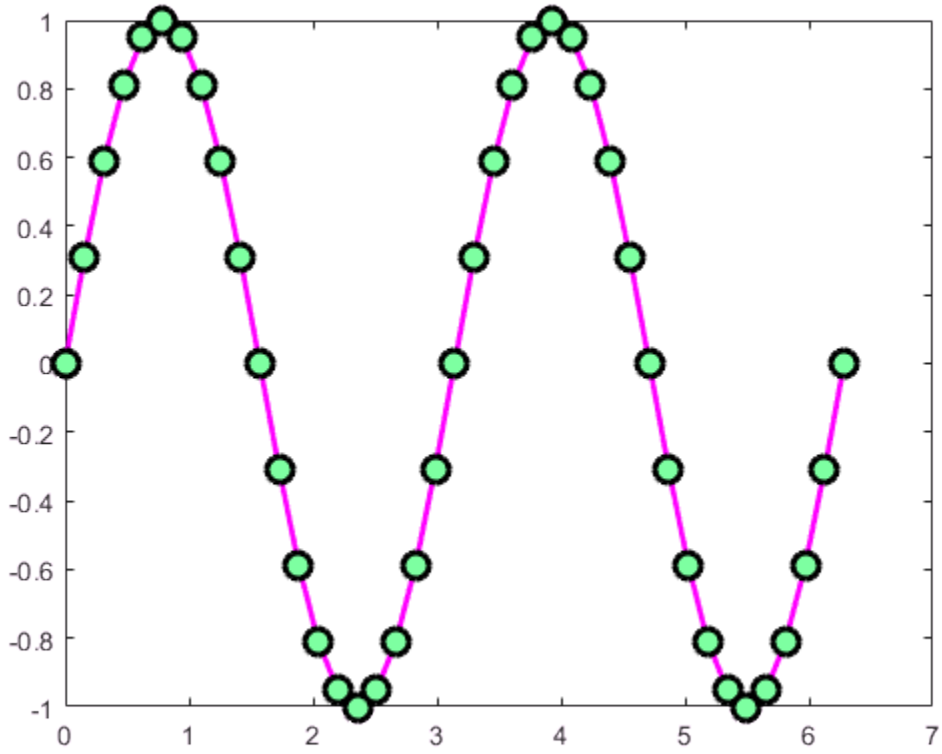

See Also

`axes` | `line` | `plot` | `patch` | `set` | `surface` | `ColorSpec`

linkaxes

Synchronize limits of specified 2-D axes

Syntax

```
linkaxes(ax)
linkaxes(ax,'option')
```

Description

Use `linkaxes` to synchronize the individual axis limits across several figures or subplots within a figure. Calling `linkaxes` makes all input axes have identical limits. Linking axes is best when you want to zoom or pan in one subplot and display the same range of data in another subplot.

Note: Use `linkaxes` for Cartesian axes that remain in 2-D views.

`linkaxes(ax)` links the *x*- and *y*-axis limits of the axes specified in the vector `ax`. You can link any number of existing plots or subplots. The `ax` input should be a vector of Cartesian axes objects. Entering an array of values results in an error message.

`linkaxes(ax,'option')` links the axes' `ax` according to the specified option. The `'option'` argument can be one of these values:

`'x'`	Link *x*-axis only.
`'y'`	Link *y*-axis only.
`'xy'`	Link *x*-axis and *y*-axis.
`'off'`	Remove linking.

See the `linkprop` function for more advanced capabilities that allow you to link object properties on any graphics object.

Examples

Create Subplots and Link Their Axes

Create a figure with three subplots and plot data in each subplot. Link the *x*-axes and *y*-axes for the three subplots. The `linkaxes` function uses the limits from the first axes passed to it. Panning or zooming into one of the subplots displays the same range of data in the other two subplots.

```
figure
ax1 = subplot(2,2,1);
x1 = linspace(0,6);
y1 = sin(x1);
plot(x1,y1)

ax2 = subplot(2,2,2);
x2 = linspace(0,10);
y2 = sin(2*x2);
plot(x2,y2)

ax3 = subplot(2,2,[3,4]);
x3 = linspace(0,16);
y3 = sin(6*x3);
plot(x3,y3)

linkaxes([ax1,ax2,ax3],'xy')
```

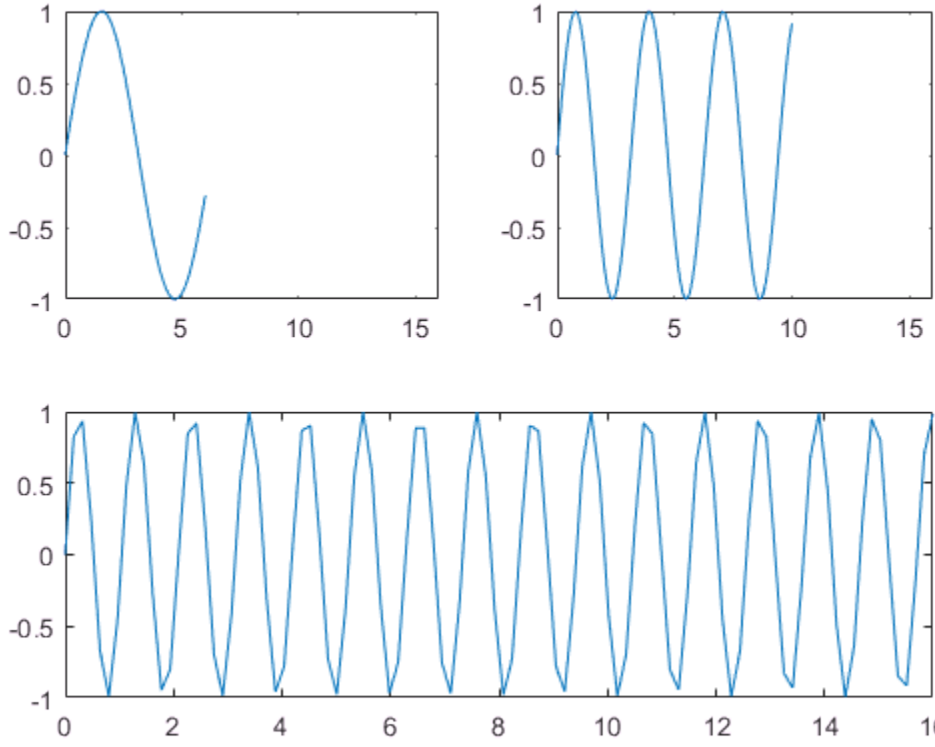

To remove the linking, use `linkaxes([ax1,ax2,ax3],'off')`.

Use Specific Subplot to Determine Limits for All Subplots

Load the `count.dat` data set which returns a three-column array named `count`. Create a new figure with three subplots and return the axes handles. In each subplot, create a bar graph.

```
load count.dat

figure
ax1 = subplot(3,1,1);
bar(count(:,1),'g');
```

```
ax2 = subplot(3,1,2);
bar(count(:,2),'b');

ax3 = subplot(3,1,3);
bar(count(:,3),'m');
```

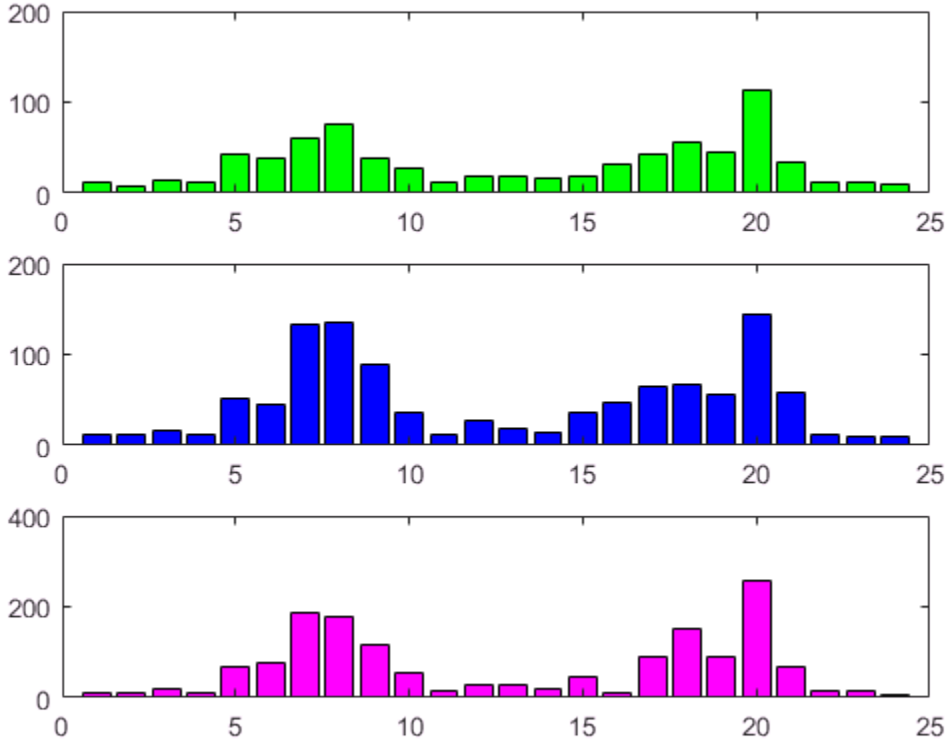

Link the *x*-axes and *y*-axes limits using `linkaxes` with the argument `'xy'`. Base the limits on the third subplot by passing its axes handle, `ax3`, as the first input to `linkaxes`.

```
linkaxes([ax3,ax2,ax1],'xy');
```

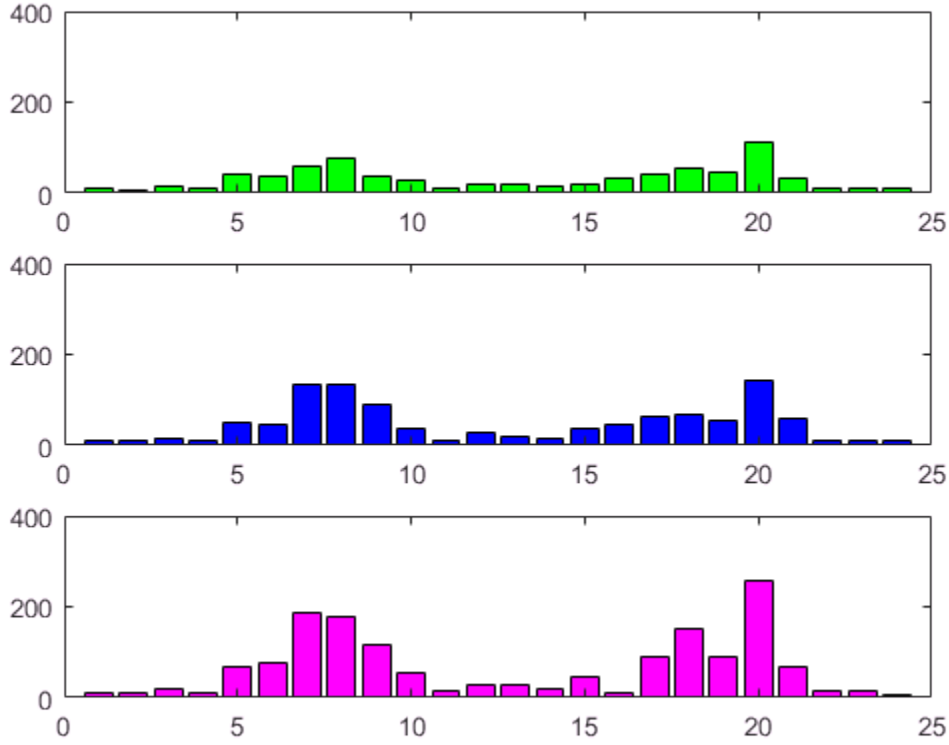

If you zoom in on one subplot, then the other two subplots behave in the same manner. To enable interactive zooming, use `zoom on`. To disable zooming, use `zoom off`.

Link x-Axes And Change Axis Limits

Load the `count.dat` data set which returns a three-column array named `count`. Create a new figure with two subplots and return the axes handles. In each subplot, create a bar graph.

```
load count.dat
figure
ax1 = subplot(2,1,1);
bar(count(:,1),'g');
```

```
ax2 = subplot(2,1,2);
bar(count(:,2),'b');
```

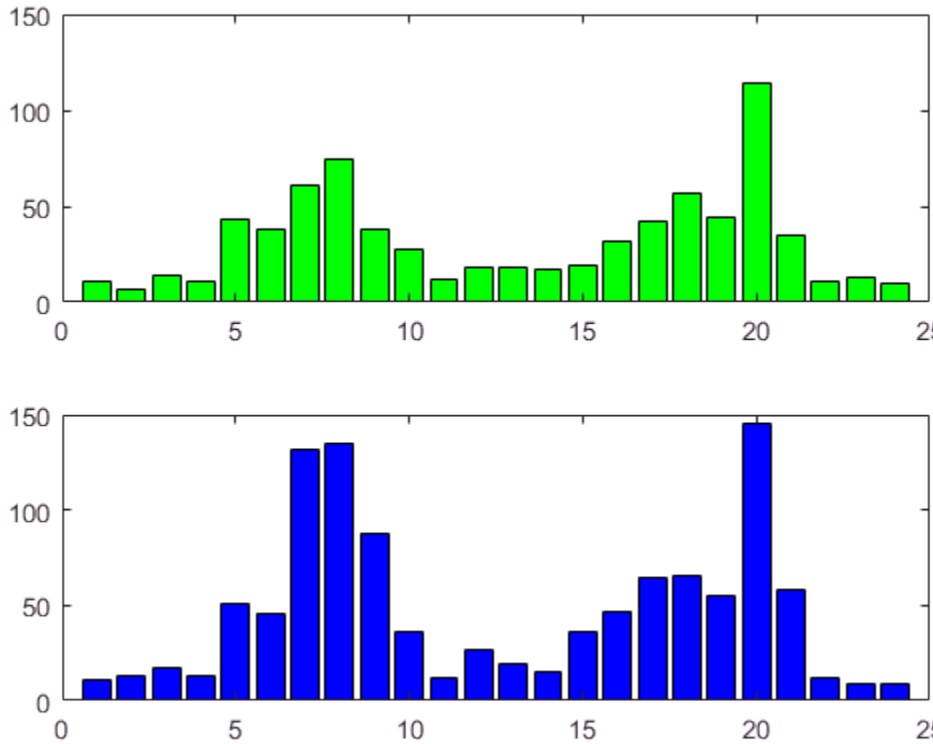

Link the *x*-axes for the two subplots.

```
linkaxes([ax1,ax2],'x');
```

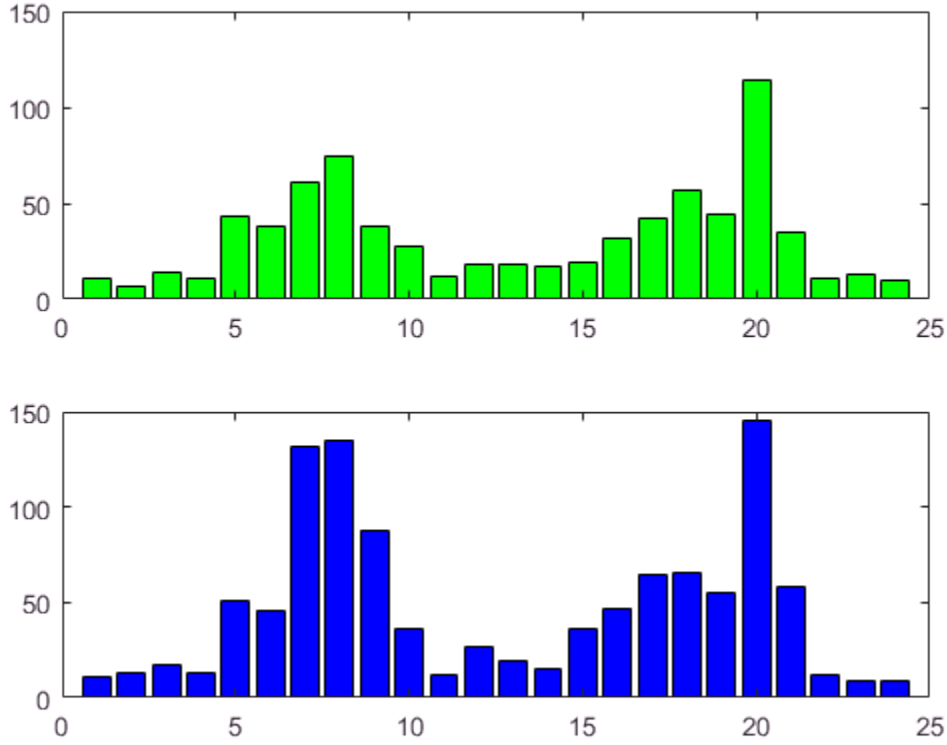

Set the *x*-axis limits for the second subplot. Setting the limits overrides the limits initially set by `linkaxes`. Changing the *x*-axis limits effects both subplots.

```
ax2.XLim = [4.5,9.5];
```

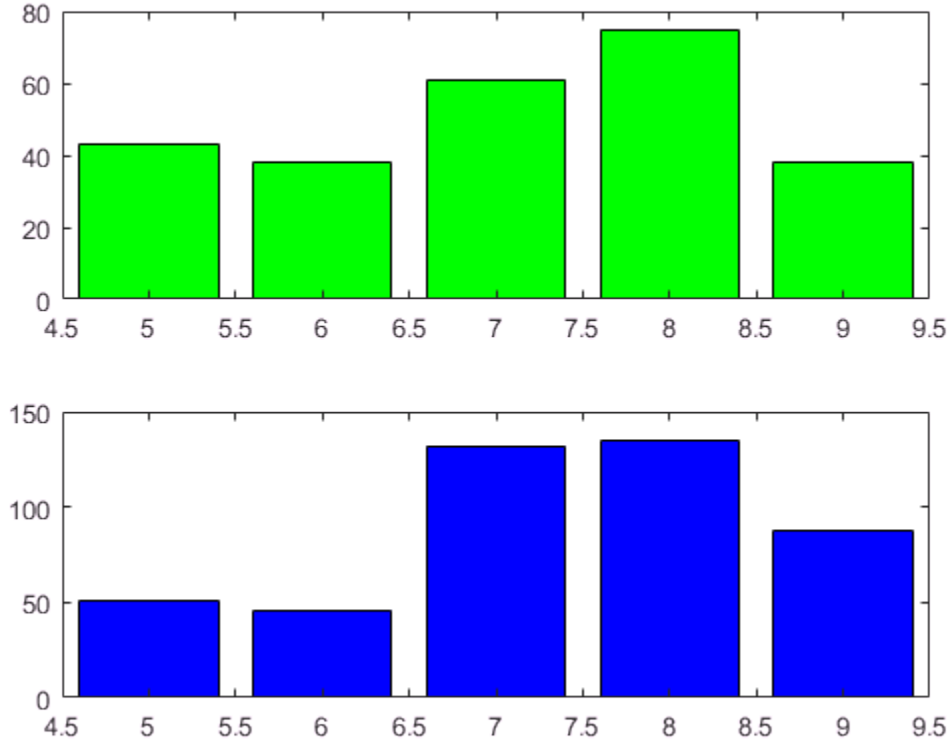

If you pan either subplot, then both subplots pan uniformly in the *x*-direction, but only one subplot moves in the *y*-direction. To enable interactive panning, use `pan on`. To disable panning, use `pan off`.

Tips

The first axes you supply to `linkaxes` determines the *x*- and *y*-limits for all linked axes. This can cause plots to partly or entirely disappear if their limits or scaling are very different. To override this behavior, after calling `linkaxes`, specify the limits of the axes that you want to control with the `set` command, as the third example illustrates.

Note: `linkaxes` is not designed to be transitive across multiple invocations. If you have three axes, `ax1`, `ax2`, and `ax3` and want to link them together, call `linkaxes` with `[ax1, ax2, ax3]` as the first argument. Linking `ax1` to `ax2`, then `ax2` to `ax3`, "unbinds" the `ax1`-`ax2` linkage.

See Also

`linkdata` | `linkprop` | `pan` | `zoom`

Introduced before R2006a

linkdata

Automatically update graphs when variables change

Syntax

```
linkdata on
linkdata off
linkdata
linkdata(figure_handle,...)
linkobj = linkdata(figure_handle)
```

Description

`linkdata on` turns on data linking for the current figure.

`linkdata off` turns data linking off.

`linkdata` by itself toggles the state of data linking.

`linkdata(figure_handle,...)` applies the function to the specified figure handle.

`linkobj = linkdata(figure_handle)` returns a *linkdata object* for the specified figure. The object has one read-only property, `Enable`, which is set to either `'on'` or `'off'`, depending on the linked state of the figure.

Data linking connects graphs in figure windows to variables in the base or a function's workspace via their `XDataSource`, `YDataSource`, and `ZDataSource` properties. When you turn on data linking for a figure, MATLAB compares variables in the current (base or function caller) workspace with the `XData`, `YData`, and `ZData` properties of graphs in the affected figure to try to match them. When a match is found, the appropriate `XDataSource`, `YDataSource` and/or `ZDataSource` for the graph are set to the matching variables.

Any subsequent changes to linked variables are reflected in graphs that use them as data sources and in the Variables editor, if the linked variables are displayed there.

Conversely, any changes to plotted data values made at the command line, in the Variables editor, or with the Brush tool (such as deleting or replacing data points), are immediately reflected in the workspace variables linked to the data points.

When a figure containing graphs is linked and any variable identified as `XDataSource`, `YDataSource`, and/or `ZDataSource` changes its values in the workspace, all graphs displaying it in that and other linked figures automatically update. This operation is equivalent to automatically calling the `refreshdata` function on the corresponding figure when a variable changes.

Linked figure windows identify themselves by the appearance of the Linked Plot information bar at the top of the window. When `linkdata` is `off` for a figure, the Linked Plot information bar is removed. If `linkdata` cannot unambiguously identify data sources for a graph in a linked figure, it reports this via the Linked Plot information bar, which gives the user an opportunity to identify data sources. The information bar displays a warning icon and a message, **No graphics have data sources** and also prompts **fix it**. Clicking **fix it** opens the Specify Data Source Properties dialog box for identifying variable names and ranges of data sources used in the graph.

Examples

Example 1

Create two variables, plot them as area charts, and link the plot to them:

```
x = 1:20;
y = rand(20,3);
area(x,y)
linkdata on
```

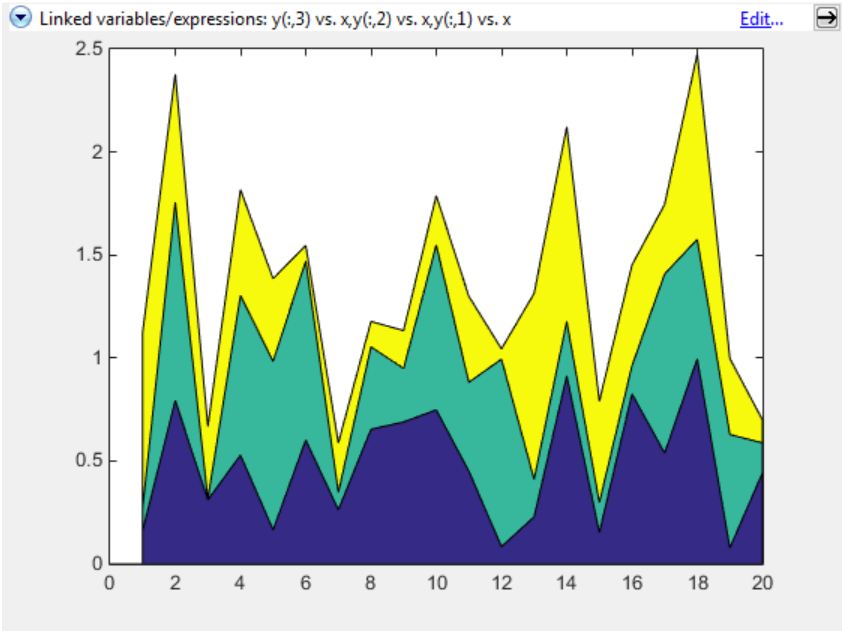

Change values for linked variable `y` in the workspace:

```
y(10,:) = 0;
```

The area graph immediately updates.

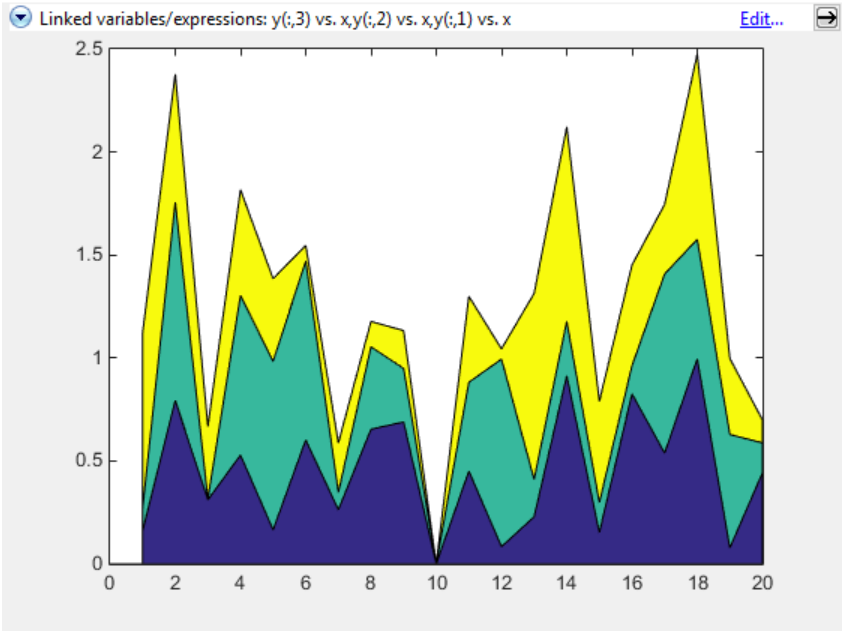

Example 2

Delete a figure if it is not linked, based on a returned `linkdata` object:

```
fig = figure;
ld = linkdata(fig)
```

```
ld 
     graphics.linkdata
```

```
if strcmp(ld.Enable,'off')
    delete(fig)
end
```

Example 3

If a plotting function can display a complex variable, then you can link such plots. To do so, you need to describe the data sources as expressions to separate the real and imaginary parts of the variable. For example,

```
x = eig(randn(20,20));
whos
  Name        Size       Bytes  Class     Attributes
  x          20x1          320  double    complex
```

yields a complex vector. You can use `plot` to display the real portion as *x* and the imaginary portion as *y*, then link the graph to the variable:

```
plot(x)
linkdata
```

However, `linkdata` cannot unambiguously identify the graph's data sources, and you must tell it by typing `real(x)` and `imag(x)` into the Specify Data Source Properties dialog box that displays when you click **fix it** in the Linked Plot information bar.

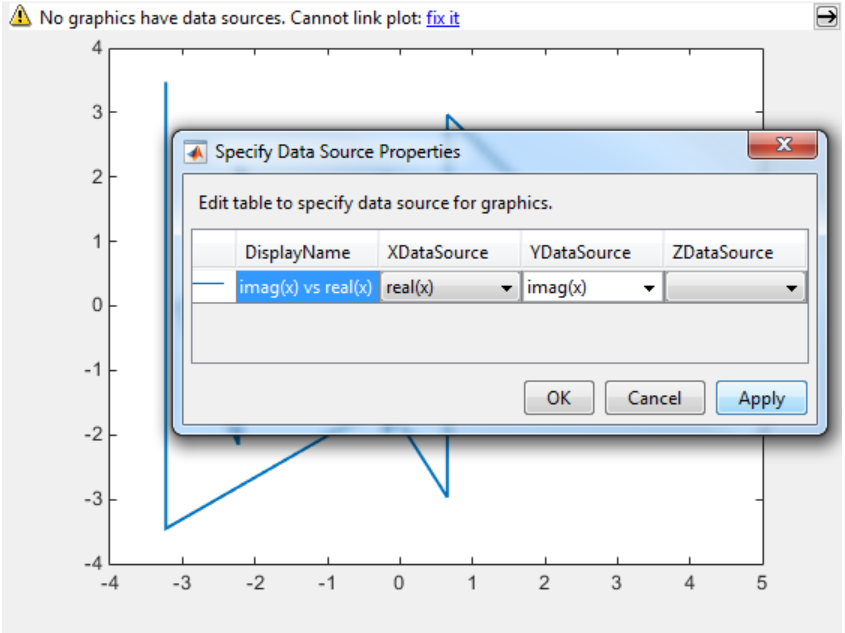

To avoid having to type the data source names in the dialog box, you can specify them when you plot:

```
plot(x,'XDataSource','real(x)','YDataSource','imag(x)')
```

If you subsequently change values of `x` programmatically or manually, the plot updates accordingly.

Note: Although you can use data brushing on linked plots of complex data, your brush marks only appear in the plot you are brushing, not in other plots or in the Variables editor. This is because function calls, such as `real(x)` and `imag(x)`, that you specify as data sources are not interpreted when brushing graphed data.

Tips

- "Types of Variables You Can Link" on page 1-6533
- "Restoring Links that Break" on page 1-6533
- "Linking Rapidly Changing Data" on page 1-6533
- "Linking Brushed Graphs" on page 1-6534

Types of Variables You Can Link

You can use `linkdata` to connect a graph with scalar, vector and matrix numeric variables of any class (including `complex`, if the graphing function can plot it) — essentially any data for which `isnumeric` equals `true`. See "Example 3" on page 1-6531 for instructions on linking complex variables. You can also link plots to numeric fields within structures. You can specify MATLAB expressions as data sources, for example, `sqrt(y)+1`.

Restoring Links that Break

Refreshing data on a linked plot fails if the variables in the `XDataSource`, `YDataSource`, or `ZDataSource` properties, when evaluated, are incompatible with what is in the current workspace, such that the corresponding `XData`, `YData`, or `ZData` are unable to respond. The visual appearance of the object in the graph is not affected by such failures, so graphic objects show no indication of broken links. Instead, a warning icon and the message **Failing links** appear on the Linked Plot information bar along with an **Edit** button that opens the Specify Data Sources dialog box.

Linking Rapidly Changing Data

`linkdata` buffers updates to data and dispatches them to plots at roughly half-second intervals. This makes data linking not suitable for smoothly animating changes in data values unless they are updated in loops that are forced to execute two times per second or less.

One consequence of buffering link updates is that `linkdata` might not detect changes in data streams it monitors. If you are running a function that uses `assignin` or `evalin` to update workspace variables, `linkdata` can sometimes fail to process updates that change values but not the size and class of workspace variables. Such failures only happen when the function itself updates the plot.

Linking Brushed Graphs

If you link data sources to graphs that have been brushed, their brushing marks can change or vanish. This is because the workspace variables in those graphs now dictate which, if any, observations are brushed, superseding any brushing annotations that were applied to their graphical data (`YData`, etc.). For more details, see "How Data Linking Affects Data Brushing" on page 1-895 in the `brush` reference page.

See Also

`brush` | `linkaxes` | `linkprop` | `refreshdata`

Topics

"Making Graphs Responsive with Data Linking"

linkprop

Keep same value for corresponding properties of graphics objects

Syntax

```
hlink = linkprop(obj_handles,'PropertyName')
```

```
hlink = linkprop(obj_handles,{'PropertyName1','PropertyName2',...})
```

Description

Use `linkprop` to maintain the same values for the corresponding properties of different graphics objects.

Note: Use `linkprop` only with graphics objects.

`hlink = linkprop(obj_handles,'`*`PropertyName`*`')` maintains the same value for the property *`PropertyName`* on all objects whose handles appear in `obj_handles`. `linkprop` returns the link object in `hlink`. See "About Link Objects" on page 1-6536 for more information.

`hlink = linkprop(obj_handles,{'`*`PropertyName1`*`','`*`PropertyName2`*`',...})` maintains the same respective values for all properties passed as a cell array on all objects whose handles appear in `obj_handles`.

MATLAB updates the linked properties of all linked objects immediately when `linkprop` is called. The first object in the list `obj_handles` determines the property values for the other objects.

A set of graphics objects can have only one link object connecting their properties at any given time. Calling `linkprop` creates a new link object. This new link object replaces any existing link object that is associated with the objects specified in `obj_handles`. However, you can manage which properties and which objects are linked by calling methods on that object:

- To add an object to the list of linked objects, use the `addtarget` method.

- To link new properties of currently-linked objects, use the `addprop` method.
- To stop linking an object, use the `removetarget` method.
- To stop properties from linking, use the `removeprop` method.

About Link Objects

The link object that `linkprop` returns stores the mechanism that links the properties of different graphics objects. Therefore, the link object must exist within the context where you want property linking to occur (such as in the base workspace if users are to interact with the objects from the command line or figure tools).

The following list describes ways to maintain a reference to the link object.

- Return the link object as an output argument from a function and keep it in the base workspace while interacting with the linked objects.
- Make the `hlink` variable global.
- Store the `hlink` variable in an object's `UserData` property or in application data.

Updating a Link Object

If you want to change either the graphics objects or the properties that are linked, you need to use the link object methods designed for that purpose. These methods are functions that operate only on link objects. To use them, you must first create a link object using `linkprop`.

Method	Purpose
`addtarget`	Add specified graphics object to the link object's targets.
`removetarget`	Remove specified graphics object from the link object's targets.
`addprop`	Add specified property to the linked properties.
`removeprop`	Remove specified property from the linked properties.

Method Syntax

```
ddtarget(hlink,obj_handles)
```

```
removetarget(hlink,obj_handles)
addprop(hlink,'PropertyName')
removeprop(hlink,'PropertyName')
```

Method Arguments

- `hlink` — Link object returned by `linkprop`
- `obj_handles` — One or more graphic object handles
- *`PropertyName`* — Name of a property common to all target objects

Examples

Link Axes So They Rotate Simultaneously

Link properties of two axes so that rotating one axes automatically rotates the other.

Create a figure with two axes and store the axes handles. Add plots to both axes.

```
figure
ax1 = subplot(2,1,1);
[X1,Y1,Z1] = peaks;
surf(X1,Y1,Z1)

ax2 = subplot(2,1,2);
[X2,Y2,Z2] = peaks(10);
surf(X2,Y2,Z2)
```

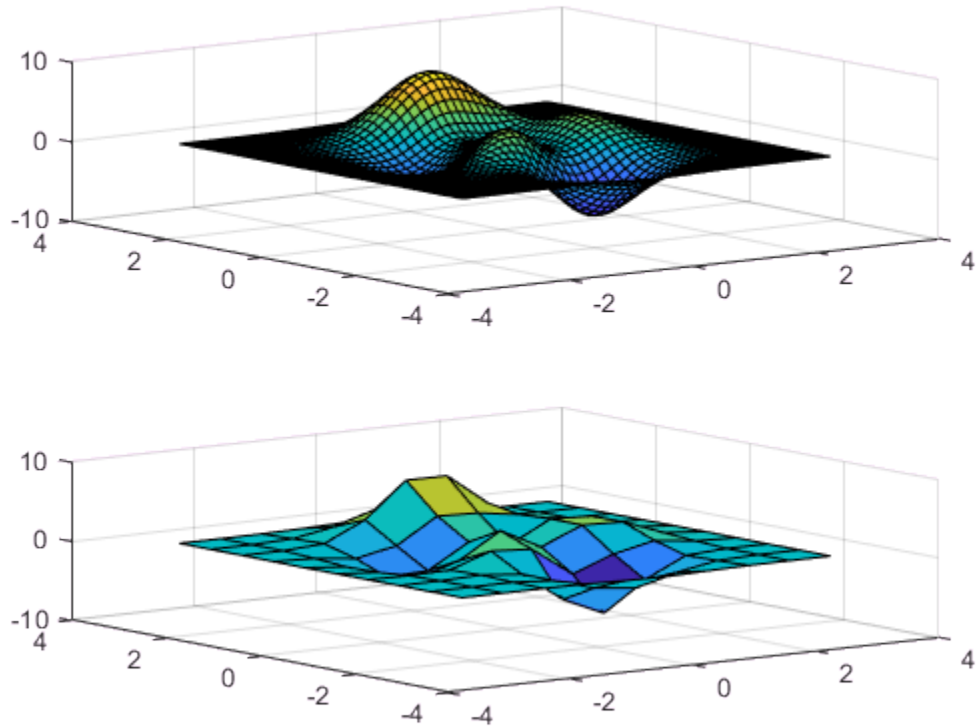

Link the `CameraPosition` and `CameraUpVector` properties of the axes and return the link object handle. Then, enable interactive rotation and use the mouse to rotate either axes. Rotating one axes automatically rotates the other in the same manner.

```
hlink = linkprop([ax1,ax2],{'CameraPosition','CameraUpVector'});
rotate3d on
```

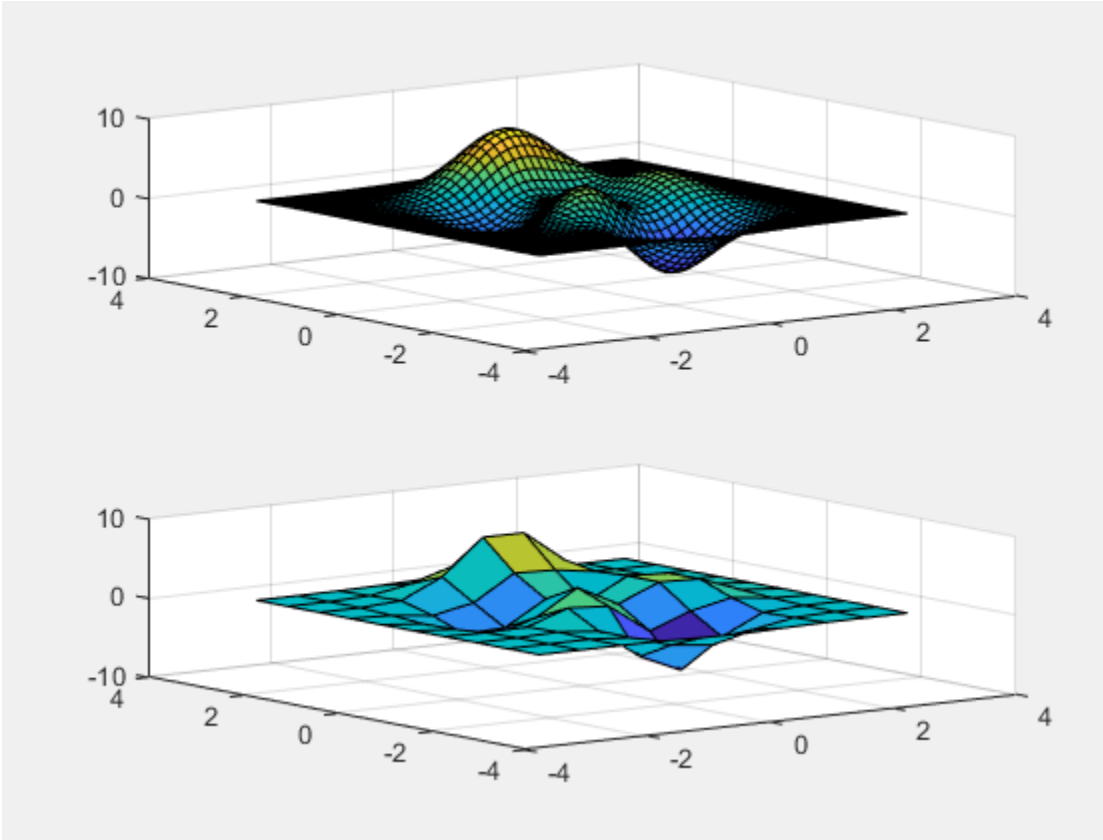

To disable interactive rotation, use `rotate3d off`.

Link an additional property by passing the link object handle and the property name to `addprop`.

```
addprop(hlink,'PlotBoxAspectRatio')
```

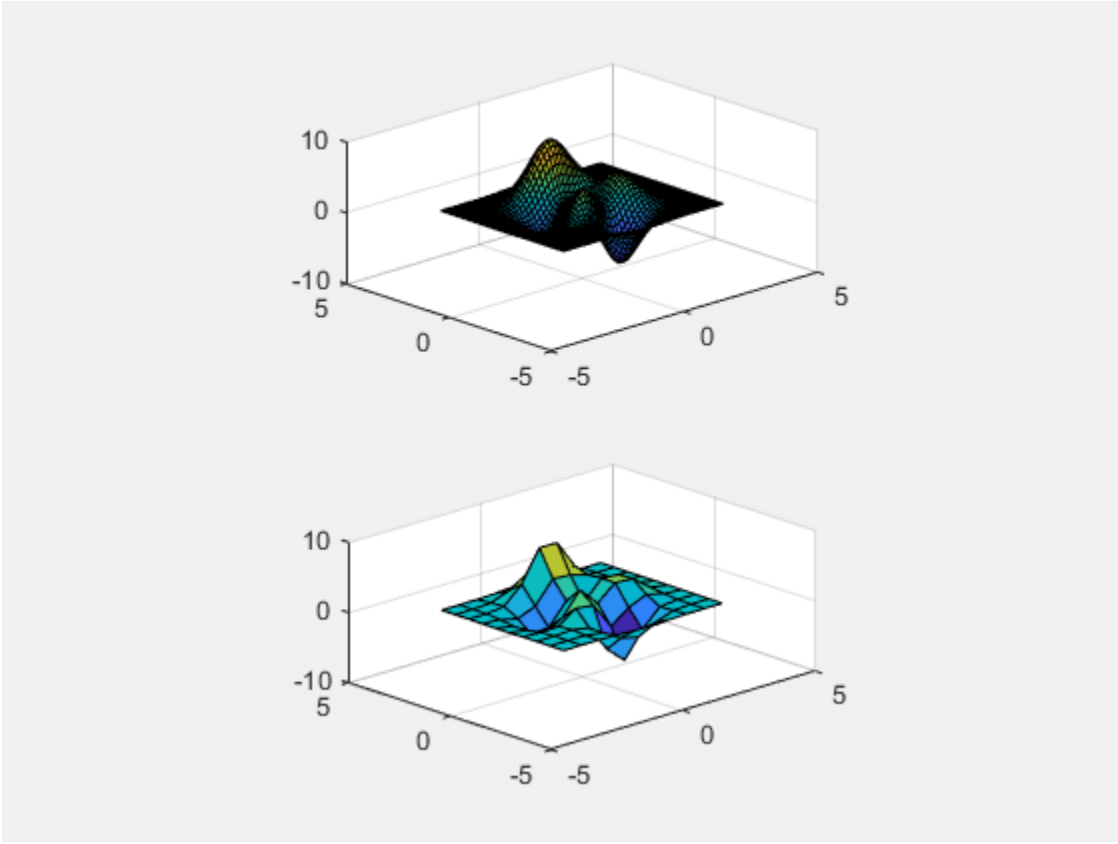

See Also

`getappdata` | `linkdata` | `setappdata` | `ishghandle` | `linkaxes`

Introduced before R2006a

linsolve

Solve linear system of equations

Syntax

```
X = linsolve(A,B)
X = linsolve(A,B,opts)
```

Description

`X = linsolve(A,B)` solves the linear system `A*X = B` using LU factorization with partial pivoting when A is square and QR factorization with column pivoting otherwise. The number of rows of `A` must equal the number of rows of `B`. If `A` is m-by-n and `B` is m-by-k, then `X` is n-by-k. `linsolve` returns a warning if `A` is square and ill conditioned or if it is not square and rank deficient.

`[X, R] = linsolve(A,B)` suppresses these warnings and returns `R`, which is the reciprocal of the condition number of `A` if `A` is square, or the rank of `A` if `A` is not square.

`X = linsolve(A,B,opts)` solves the linear system `A*X = B` or `A'*X = B`, using the solver that is most appropriate given the properties of the matrix `A`, which you specify in `opts`. For example, if `A` is upper triangular, you can set `opts.UT = true` to make `linsolve` use a solver designed for upper triangular matrices. If `A` has the properties in `opts`, `linsolve` is faster than `mldivide`, because `linsolve` does not perform any tests to verify that `A` has the specified properties.

Notes If `A` does not have the properties that you specify in `opts`, `linsolve` returns incorrect results and does not return an error message. If you are not sure whether `A` has the specified properties, use `mldivide` instead.

For small problems, there is no speed benefit in using `linsolve` on triangular matrices as opposed to using the `mldivide` function.

The `TRANSA` field of the `opts` structure specifies the form of the linear system you want to solve:

- If you set `opts.TRANSA = false`, `linsolve(A,B,opts)` solves `A*X = B`.
- If you set `opts.TRANSA` = `true`, `linsolve(A,B,opts)` solves `A'*X = B`.

The following table lists all the field of `opts` and their corresponding matrix properties. The values of the fields of `opts` must be `logical` and the default value for all fields is `false`.

Field Name	Matrix Property
`LT`	Lower triangular
`UT`	Upper triangular
`UHESS`	Upper Hessenberg
`SYM`	Real symmetric or complex Hermitian
`POSDEF`	Positive definite
`RECT`	General rectangular
`TRANSA`	Conjugate transpose — specifies whether the function solves `A*X = B` or `A'*X = B`

The following table lists all combinations of field values in `opts` that are valid for `linsolve`. A true/false entry indicates that `linsolve` accepts either true or false.

LT	UT	UHESS	SYM	POSDEF	RECT	TRANSA
true	false	false	false	false	true/false	true/false
false	true	false	false	false	true/false	true/false
false	false	true	false	false	false	true/false
false	false	false	true	true/fals	false	true/false
false	false	false	false	false	true/false	true/false

Examples

The following code solves the system `A'x = b` for an upper triangular matrix `A` using both `mldivide` and `linsolve`.

```
A = triu(rand(5,3)); x = [1 1 1 0 0]'; b = A'*x;
y1 = (A')\b
```

```
opts.UT = true; opts.TRANSA = true;
y2 = linsolve(A,b,opts)

y1 =

    1.0000
    1.0000
    1.0000
         0
         0


y2 =

    1.0000
    1.0000
    1.0000
         0
         0
```

Note If you are working with matrices having different properties, it is useful to create an options structure for each type of matrix, such as `opts_sym`. This way you do not need to change the fields whenever you solve a system with a different type of matrix `A`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The `opts` structure must be a constant scalar. Code generation does not support arrays of options structures.
- Code generation only optimizes these cases:
  - `UT`
  - `LT`

- `UHESS` = `true` (the `TRANSA` can be either `true` or `false`)
- `SYM` = `true` and `POSDEF` = `true`

Other options are equivalent to using `mldivide`.

See Also

See Also

`mldivide`

Introduced before R2006a

linspace

Generate linearly spaced vector

Syntax

```
y = linspace(x1,x2)
y = linspace(x1,x2,n)
```

Description

`y = linspace(x1,x2)` returns a row vector of 100 evenly spaced points between `x1` and `x2`.

`y = linspace(x1,x2,n)` generates `n` points. The spacing between the points is `(x2-x1)/(n-1)`.

`linspace` is similar to the colon operator, "`:`", but gives direct control over the number of points and always includes the endpoints. "`lin`" in the name "`linspace`" refers to generating linearly spaced values as opposed to the sibling function `logspace`, which generates logarithmically spaced values.

Examples

Vector of Evenly Spaced Numbers

Create a vector of 100 evenly spaced points in the interval `[-5,5]`.

```
y = linspace(-5,5);
```

Vector with Specified Number of Values

Create a vector of 7 evenly spaced points in the interval `[-5,5]`.

```
y1 = linspace(-5,5,7)
```

```
y1 =

   -5.0000   -3.3333   -1.6667         0    1.6667    3.3333    5.0000
```

Vector of Evenly Spaced Complex Numbers

Create a vector of complex numbers with 8 evenly spaced points between `1+2i` and `10+10i`.

```
y = linspace(1+2i,10+10i,8)
```

```
y =
   1.0000 + 2.0000i   2.2857 + 3.1429i   3.5714 + 4.2857i   4.8571 + 5.4286i   6.1429 -
```

Input Arguments

`x1,x2` — Point interval
pair of numeric scalars

Point interval, specified as a pair of numeric scalars. `x1` and `x2` define the interval over which `linspace` generates points. `x1` and `x2` can be real or complex, and `x2` can be either larger or smaller than `x1`. If `x2` is smaller than `x1`, then the vector contains descending values.

Data Types: `single` | `double` | `datetime` | `duration`
Complex Number Support: Yes

`n` — Number of points
100 (default) | real numeric scalar

Number of points, specified as a real numeric scalar.

- If `n` is `1`, `linspace` returns `x2`.
- If `n` is zero or negative, `linspace` returns an empty 1-by-0 matrix.
- If `n` is not an integer, `linspace` rounds down and returns `floor(n)` points.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`colon` | `logspace`

Introduced before R2006a

RandStream.list

Random number generator algorithms

Class

`RandStream`

Syntax

`RandStream.list`

Description

`RandStream.list` lists all the generator algorithms that can be used when creating a random number stream with `RandStream` or `RandStream.create`. The available generator algorithms and their properties are given in the following table.

Keyword	Generator	Multiple Stream and Substream Support	Approximate Period In Full Precision
mt19937ar	Mersenne twister (used by default stream at MATLAB startup)	No	$2^{19937}-1$
dsfmt19937	SIMD-oriented fast Mersenne twister	No	$2^{19937}-1$
mcg16807	Multiplicative congruential generator	No	$2^{31}-2$
mlfg6331_64	Multiplicative lagged Fibonacci generator	Yes	2^{124}
mrg32k3a	Combined multiple recursive generator	Yes	2^{127}

Keyword	Generator	Multiple Stream and Substream Support	Approximate Period In Full Precision
shr3cong	Shift-register generator summed with linear congruential generator	No	2^{64}
swb2712	Modified subtract with borrow generator	No	2^{1492}

See “Choosing a Random Number Generator” for details about these generator algorithms. See http://www.math.sci.hiroshima-u.ac.jp/~m-mat/MT/emt.html for a full description of the Mersenne twister algorithm.

See Also

Topics

“Creating and Controlling a Random Number Stream”

listdlg

Create list selection dialog box

Syntax

```
[Selection,ok] = listdlg(Name,Value,...)
```

Description

`[Selection,ok] = listdlg(Name,Value,...)` creates a modal dialog box that allows the user to select one or more items from a list. The function returns two output arguments containing information about the items the user selected. The first output, `Selection`, contains the indices of the selected rows in the list. `Selection` is an empty array when no selection is made. The second output, `ok`, is 0 when no selection is made, or 1 when a selection is made.

The input arguments, `Name,Value`, are pairs of arguments that specify certain aspects of the dialog box. The pair, `'ListString',S` is required, but you can optionally specify any number of other pairs. This table lists all possible `Name,Value` input arguments:

Name	Value
`'ListString'` (required)	Cell array of character vectors that specify the list items. Typically, each element in the cell array corresponds to an item in the list. For example, `{'One','Two','Three'}` creates 3 list items. Newline characters inserted using `sprintf` will result in more list items.
`'SelectionMode'`	Selection mode for allowing single or multiple selections. The possible values are `'single'` and `'multiple'`, where `'multiple'` is the default value.
`'ListSize'`	List box size in pixels, specified as a two-element vector `[width height]`. Default is `[160 300]`.
`'InitialValue'`	Vector of indices of the list box items that are initially selected. Default is 1, the first item.

Name	Value
`'Name'`	Dialog box title. The default value is an empty character vector.
`'PromptString'`	Prompt that appears above the list box. Specify this prompt as a character vector or cell array of character vectors.
`'OKString'`	Label for the **OK** button. The default label is `'OK'`.
`'CancelString'`	Label for the **Cancel** button. Default label is `'Cancel'`.

Double-clicking on an item or pressing **Return** when multiple items are selected has the same effect as clicking the **OK** button. The dialog box has a **Select all** button (when in multiple selection mode) that enables you to select all list items.

Examples

This example displays a dialog box that enables the user to select a file from the current directory.

The `listdlg` function returns two output arguments. The first output, `s`, is the index to the selected row in the list. The second output, `v`, is 0 when no selection is made, or 1 when a selection is made.

```
d = dir;
str = {d.name};
[s,v] = listdlg('PromptString','Select a file:',...
                'SelectionMode','single',...
                'ListString',str)
```

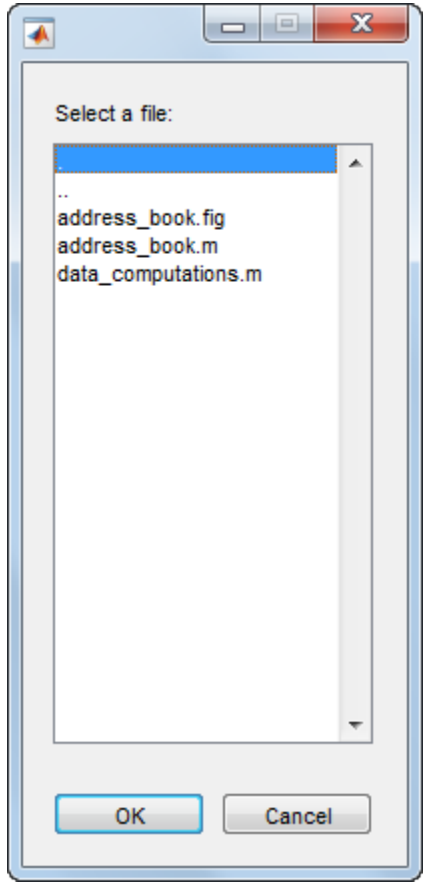

Definitions

Modal Dialog Box

A window that blocks interaction with other windows until the user closes it.

See Also

`uigetfile` | `uigetdir` | `questdlg` | `uicontrol`

Introduced before R2006a

listfonts

List available system fonts

Syntax

```
c = listfonts
c = listfonts(h)
```

Description

`c = listfonts` returns sorted list of available system fonts.

`c = listfonts(h)` returns sorted list of available system fonts and includes the `FontName` property of the object with handle `h`.

Examples

Example 1

This example returns a list of available system fonts similar in format to the one shown.

```
list = listfonts
```

```
list =
    'Agency FB'
    'Algerian'
    'Arial'
    ...
    'ZapfChancery'
    'ZapfDingbats'
    'ZWAdobeF'
```

Example 2

This example returns a list of available system fonts with the value of the `FontName` property, for the object with handle `h`, included and sorted in the list.

```
h = uicontrol('Style','text','String',...
    'My Font','FontName','MyFont');
list = listfonts(h)
```

```
list =
    'Agency FB'
    'Algerian'
    'Arial'
    ...
    'MyFont'
    ...
    'ZapfChancery'
    'ZapfDingbats'
    'ZWAdobeF'
```

Tips

Calling `listfonts` returns a list of all fonts on your system, possibly including fonts that you cannot use with MATLAB. Consider using the `uisetfont` function to preview fonts that MATLAB can render in figure windows. Like `uisetfont`, the **Custom** pane under the **Fonts** section of MATLAB Preferences also previews available fonts and only shows those that MATLAB can render.

See Also

`uisetfont`

load

Load variables from file into workspace

Syntax

```
load(filename)
load(filename,variables)
load(filename,'-ascii')
load(filename,'-mat')
load(filename,'-mat',variables)
```

```
S = load( ___ )
```

```
load filename
```

Description

`load(filename)` loads data from `filename`.

- If `filename` is a MAT-file, then `load(filename)` loads variables in the MAT-File into the MATLAB workspace.
- If `filename` is an ASCII file, then `load(filename)` creates a double-precision array containing data from the file.

`load(filename,variables)` loads the specified variables from the MAT-file, `filename`.

`load(filename,'-ascii')` treats `filename` as an ASCII file, regardless of the file extension.

`load(filename,'-mat')` treats `filename` as a MAT-file, regardless of the file extension.

`load(filename,'-mat',variables)` loads the specified variables from `filename`.

`S = load( ___ )` loads data into `S`, using any of the input arguments in the previous syntax group.

- If `filename` is a MAT-file, then `S` is a structure array.
- If `filename` is an ASCII file, then `S` is a double-precision array containing data from the file.

`load filename` is the command form of the syntax. Command form requires fewer special characters. You do not need to type parentheses or enclose input in single or double quotes. Separate inputs with spaces instead of commas.

For example, to load a file named `durer.mat`, these statements are equivalent:

```
load durer.mat      % command form
load('durer.mat')   % function form
```

You can include any of the inputs described in previous syntaxes. For example, to load the variable named `X`:

```
load durer.mat X       % command form
load('durer.mat','X')  % function form
```

Do not use command form when any of the inputs, such as `filename`, are variables.

Examples

Load All Variables from MAT-File

Load all variables from the example MAT-file, `gong.mat`. Check the contents of the workspace before and after the load operation.

```
disp('Contents of workspace before loading file:')
whos

disp('Contents of gong.mat:')
whos('-file','gong.mat')

load('gong.mat')
disp('Contents of workspace after loading file:')
whos
```

You also can use command syntax to load the variables. Clear the previously loaded variables and repeat the `load` operation.

```
clear y Fs
```

```
load gong.mat
```

Load Specific Variable From MAT-File

Load only variable `y` from example file `handel.mat`. If the workspace already contains variable `y`, the `load` operation overwrites it with data from the file.

```
load('handel.mat','y')
```

You also can use command syntax to load the variable, `y`.

```
load handel.mat y
```

Use Regular Expressions to Load Specific Variables

View the contents of the example file, `accidents.mat`.

```
whos -file accidents.mat
```

```
 Name              Size            Bytes  Class     Attributes

  datasources       3x1              2724  cell
  hwycols           1x1                 8  double
  hwydata          51x17            6936  double
  hwyheaders        1x17            2758  cell
  hwyidx           51x1              408  double
  hwyrows           1x1                 8  double
  statelabel       51x1             6596  cell
  ushwydata         1x17             136  double
  uslabel           1x1              138  cell
```

Use function syntax to load all variables with names not beginning with `'hwy'`, from the file.

```
load('accidents.mat', '-regexp', '^(?!hwy)...')
```

Alternatively, use command syntax to load the same variables.

```
load accidents.mat -regexp '^(?!hwy)...'
```

Load List of Variables into Structure Array

The file, `durer.mat`, contains variables `X`, `caption`, and `map`. Create a cell array of variable names to load.

```
filename = 'durer.mat';
myVars = {'X','caption'};
S = load(filename,myVars{:})
```

```
S = struct with fields:
          X: [648×509 double]
    caption: [2×28 char]
```

Only the variables `X` and `caption` are loaded into the structure array, `S`.

Load ASCII File

Create an ASCII file from several 4-column matrices, and load the data back into a double-precision array.

```
a = magic(4);
b = ones(2, 4) * -5.7;
c = [8 6 4 2];
save -ascii mydata.dat a b c
clear a b c

load mydata.dat -ascii
```

`load` creates an array of type `double` named `mydata`.

View information about `mydata`.

```
whos mydata
```

```
  Name        Size            Bytes  Class     Attributes

  mydata      7x4               224  double
```

Input Arguments

`filename` — Name of file
`matlab.mat` (default) | character vector | string

Name of file, specified as a character vector or string. If you do not specify `filename`, the `load` function searches for a file named `matlab.mat`.

`filename` can include a file extension and a full or partial path. If `filename` has no extension (that is, no text after a period), `load` looks for a file named `filename.mat`. If `filename` has an extension other than `.mat`, the `load` function treats the file as ASCII data.

When using the command form of `load`, it is unnecessary to enclose the input in single or double quotes. However, if `filename` contains a space, you must enclose the argument in single quotes. For example, `load 'filename withspace.mat'`.

ASCII files must contain a rectangular table of numbers, with an equal number of elements in each row. The file delimiter (the character between elements in each row) can be a blank, comma, semicolon, or tab character. The file can contain MATLAB comments (lines that begin with a percent sign, `%`).

Example: `'myFile.mat'`

Data Types: `char` | `string`

`variables` — Names of variables to load

character vector | string

Names of variables to load, specified as one or more character vector or string. When using the command form of `load`, you do not need to enclose the input in single or double quotes. `variables` can be in one of the following forms.

Form of `variables` Input	Variables to Load
`var1,...,varN`	Load the listed variables, specified as individual character vectors or strings. Use the `'*'` wildcard to match patterns. For example, `load('filename.mat','A*')` or `load filename.mat A*` loads all variables in the file whose names start with `A`.
`'-regexp'`,*`expr1,...,exprN`*	Load only the variables or fields whose names match the regular expressions, specified as character vectors or strings. For example, `load('filename.mat','-regexp','^Mon','^Tues')` or `load filename.mat -regexp ^Mon ^Tues` loads only the variables in the file whose names begin with `Mon` or `Tues`.

Data Types: `char` | `string`

Output Arguments

`S` — Loaded variables or data
structure array | `m`-by-`n` array

Loaded variables, returned as a structure array, if `filename` is a MAT-File.

Loaded data, returned as an `m`-by-`n` array of type `double`, if `filename` is an ASCII file. `m` is equal to the number of lines in the file, and `n` is equal to the number of values on a line.

Algorithms

If you do not specify an output for the `load` function, MATLAB creates a variable named after the loaded file (minus any file extension). For example, the command

```
load mydata.dat
```

reads data into a variable called `mydata`.

To create the variable name, `load` precedes any leading underscores or digits in `filename` with an `X` and replaces any other nonalphabetic characters with underscores. For example, the command

```
load 10-May-data.dat
```

creates a variable called `X10_May_data`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Use `load` only when generating MEX functions or code for Simulink simulation. To load compile-time constants, use `coder.load`.
- Does not support use of the function without assignment to a structure or array. For example, use `S = load(filename)`, not `load(filename)`.
- The output `S` must be the name of a structure or array without any subscripting. For example, `S(i) = load('myFile.mat')` is not supported.
- Arguments to `load` must be compile-time constant character vectors.
- Does not support loading objects.
- If the MAT-file contains unsupported constructs, use `S = load(filename,variables)` to load only the supported constructs.
- In a function intended for code generation, the use of `save` or the use of `coder.extrinsic` with `save` is not supported. To save the workspace data to a MAT-file, use the `save` function prior to generating code.
- When using the `load` function to load variables whose size can change at run time, you must explicitly declare the variables as variable-size data by using `coder.varsize`.

See Also

See Also

`clear` | `importdata` | `matfile` | `regexp` | `save` | `uiimport` | `whos`

Topics

"Supported File Formats for Import and Export"
"Save and Load Workspace Variables"
"Ways to Import Text Files"
"Unexpected Results When Loading Variables Within a Function"
"Import or Export a Sequence of Files"
"Command vs. Function Syntax"

Introduced before R2006a

load (COM)

Initialize control object from file

Syntax

```
load(h,'filename')
```

Description

`load(h,'filename')` initializes the COM object associated with the interface represented by the MATLAB COM object `h` from file specified by `filename`. The file must have been created previously by serializing an instance of the same control.

COM functions are available on Microsoft Windows systems only.

Note The COM `load` function is only supported for controls.

Examples

Create an `mwsamp` control and save its original state to the file `mwsample`.

```
f = figure('position',[100 200 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],f);
save(h,'mwsample')
```

Alter the figure by changing its label and the radius of the circle.

```
h.Label = 'Circle';
h.Radius = 50;
Redraw(h)
```

Restore the control to its original state using the `load` function.

```
load(h,'mwsample')
get(h)
```

```
ans =
     Label: 'Label'
```

```
Radius: 20
```

See Also

save (COM) | delete (COM) | actxcontrol | actxserver | release

Introduced before R2006a

load (serial)

Load serial port objects and variables into MATLAB workspace

Syntax

```
load filename
load filename obj1 obj2 ...
out = load('filename','obj1','obj2',...)
```

Description

`load filename` returns all variables from the file specified by `filename` into the MATLAB workspace.

`load filename obj1 obj2 ...` returns the serial port objects specified by `obj1 obj2 ...` from the file `filename` into the MATLAB workspace.

`out = load('filename','obj1','obj2',...)` returns the specified serial port objects from the file `filename` as a structure to `out` instead of directly loading them into the workspace. The field names in `out` match the names of the loaded serial port objects.

Examples

Note: This example is based on a Windows platform.

Suppose that you create the serial port objects `s1` and `s2`, configure a few properties for `s1`, and connect both objects to their instruments:

```
s1 = serial('COM1');
s2 = serial('COM2');
set(s1,'Parity','mark','DataBits',7)
fopen(s1)
fopen(s2)
```

Save s1 and s2 to the file MyObject.mat, and then load the objects back into the workspace:

```
save MyObject s1 s2
load MyObject s1
load MyObject s2

get(s1, {'Parity', 'DataBits'})

ans =
    'mark'    [7]

get(s2, {'Parity', 'DataBits'})

ans =
    'none'    [8]
```

Tips

Values for read-only properties are restored to their default values upon loading. For example, the Status property is restored to closed. To determine if a property is read-only, examine its reference pages.

See Also

save | Status

Introduced before R2006a

loadlibrary

Load C/C++ shared library into MATLAB

Syntax

```
loadlibrary(libname,hfile)
loadlibrary(libname)
loadlibrary(libname,hfile,Name,Value)
```

```
loadlibrary(libname,@protofile)
```

```
[notfound,warnings] = loadlibrary( ___ )
```

Description

`loadlibrary(libname,hfile)` loads functions from shared library, `libname`, defined in header file, `hfile`, into MATLAB. The `loadlibrary` function only supports calling functions that are callable from C and header files that can be parsed by a C compiler. Functions written in C++ must be declared as `extern "C"`.

`loadlibrary(libname)` loads the library if the name of the header file is the same as the name of the library file.

`loadlibrary(libname,hfile,Name,Value)` loads the library with one or more `Name,Value` arguments.

`loadlibrary(libname,@protofile)` uses a prototype file, `protofile`, in place of a header file.

`[notfound,warnings] = loadlibrary( ___ )` returns warning information, and can include any of the input arguments in previous syntaxes.

Examples

Display Functions in `shrlibsample` Library

Add path to `examples` folder.

```
addpath(fullfile(matlabroot,'extern','examples','shrlib'))
```

Display functions in library.

```
if not(libisloaded('shrlibsample'))
    loadlibrary('shrlibsample')
end
libfunctions('shrlibsample')
```

```
Functions in library shrlibsample:

addDoubleRef              addMixedTypes             addStructByRef            addStruct
```

Clean up.

```
unloadlibrary shrlibsample
```

Load Library Using Multiple Header Files

Suppose that you have a library, `mylib`, with the header file, `mylib.h`. The header file contains the statement, `#include header2.h`. To use functions defined in `header2.h`, call `loadlibrary` with the `addheader` option.

```
loadlibrary('mylib','mylib.h','addheader','header2')
```

Call `stringToUpper` Function Using Alias Name

```
if libisloaded('shrlibsample')
    unloadlibrary('shrlibsample')
else
    addpath(fullfile(matlabroot,'extern','examples','shrlib'))
end
```

Create an alias name `lib` for library `shrlibsample`.

```
loadlibrary('shrlibsample','shrlibsample.h','alias','lib')
```

Call function `stringToUpper` using the alias name.

```
str = 'This was a Mixed Case string';
calllib('lib','stringToUpper',str)
```

```
ans =
'THIS WAS A MIXED CASE STRING'
```

Clean up.

```
unloadlibrary lib
```

Search Alternative Paths for Header Files

Add path to folder containing `shrlibsample` and its header file, `shrlibsample.h`.

```
addpath(fullfile(matlabroot,'extern','examples','shrlib'))
```

The `shrlibsample.h` header file includes the header file, `shrhelp.h`. If `shrhelp.h` is in a different folder, for example, `c:\work`, use the `'includepath'` option to tell MATLAB where to find the file.

```
loadlibrary('shrlibsample','shrlibsample.h','includepath','c:\work')
```

Cleanup.

```
unloadlibrary shrlibsample
```

Create Alias Name for MATLAB mxGetNumberOfDimensions Function

This example shows how to replace the `mxGetNumberOfDimensions` function name in the MATLAB Matrix Library API with a shorter alias name, `mxGetDims`. To define the alias name, create a prototype file then load the library using the prototype file as the header file.

Use a folder for which you have write-access.

```
cd('c:\work')
```

Create a prototype file, `mxproto.m`.

```
hfile = fullfile(matlabroot,'extern','include','matrix.h');
[notfound,warnings] = loadlibrary('libmx',hfile,'mfilename','mxproto')
```

MATLAB creates the prototype file in the current folder. Ignore the warning message, `Type 'longdouble' was not found`.

Add the alias name to the prototype file. Open the file in MATLAB Editor.

```
edit mxproto.m
```

Search for the function `mxGetNumberOfDimensions`.

The following command assigns the alias `mxGetDims`.

```
fcns.alias{fcnNum}='mxGetDims';
```

Add the command to the line before the command to increment `fcnNum`. The new function prototype, with the new command shown in bold, looks like the following:

```
fcns.name{fcnNum}='mxGetNumberOfDimensions';
fcns.calltype{fcnNum}='cdecl';
fcns.LHS{fcnNum}='int32';
fcns.RHS{fcnNum}={'MATLAB array'};
fcns.alias{fcnNum}='mxGetDims'; % Alias defined
fcnNum=fcnNum+1; % Increment fcnNum
```

Reload `libmx` using the prototype file.

```
unloadlibrary libmx
loadlibrary('libmx',@mxproto)
```

Call the function by its alias name.

```
y = rand(4,7,2);
calllib('libmx','mxGetDims',y)
```

```
ans =
     3
```

Cleanup.

```
unloadlibrary shrlibsample
```

Input Arguments

`libname` — Name of shared library

character vector

Name of shared library, specified as a character vector. The name is case-sensitive and must match the file on your system.

On Microsoft Windows systems, `libname` refers to the name of a shared library (`.dll`) file. On Linux systems, it refers to the name of a shared object (`.so`) file. On Apple Mac systems, it refers to a dynamic shared library (`.dylib`). If you do not include a file

extension with the `libname` argument, `loadlibrary` attempts to find the library with either the appropriate platform MEX-file extension or the appropriate platform library extension. For a list of MEX-file extensions, use `mexext`.

MATLAB extracts the name portion of `libname` to identify the library in other shared library functions. For example, when you call the `calllib` function, do not include the path or file extension in the library argument name.

Data Types: `char`

`hfile` — Name of C header file

character vector

Name of C header file, specified as a character vector. The name is case-sensitive and must match the file on your system. If you do not include a file extension in the file name, `loadlibrary` uses `.h` for the extension.

Data Types: `char`

`protofile` — Name of prototype file

character vector

Name of prototype file, specified as a character vector. The name is case-sensitive and must match the file on your system. `@protofile` specifies a function handle to the prototype file. When using a prototype file, the only valid `Name,Value` pair argument is **`alias`**.

Data Types: `char`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example:

`'addheader'` — Header file

character vector

Header file, specified as the comma-separated pair consisting of `'addheader'` and a character vector. Specify the file name without a file extension.

Each file specified by `addheader` must have a corresponding `#include` statement in the base header file. To load only the functions defined in the header file that you want to use in MATLAB, use `addheader`.

MATLAB does not verify the existence of header files and ignores any that are not needed.

`'alias'` — Alternative name for library
character vector

Alternative name for library, specified as the comma-separated pair consisting of `'alias'` and a character vector. Associates the specified name with the library. All subsequent calls to MATLAB functions that reference this library must use this alias until the library is unloaded.

`'includepath'` — More search path for subordinate header files
character vector

more search path for subordinate header files—header files within header files, specified as the comma-separated pair consisting of `'includepath'` and a character vector.

`'mfilename'` — Prototype file
character vector

Prototype file, specified as the comma-separated pair consisting of `'mfilename'` and a character vector. Generates a prototype file in the current folder. The prototype file name must be different from the library name. Use this file in place of a header file when loading the library.

`'thunkfilename'` — Thunk file
character vector

Thunk file, specified as the comma-separated pair consisting of `'thunkfilename'` and a character vector. Overrides the default thunk file name.

Output Arguments

`notfound` — Names of functions
cell array

Names of functions found in header files but missing from the library, returned as cell array.

Data Types: `cell`

`warnings` — Warnings
character array

Warnings produced while processing the header file, returned as character array.

Limitations

- You must have a supported C compiler and Perl must be available.
- Do not call `loadlibrary` if the library is already in memory. To test this condition, call `libisloaded`.
- `loadlibrary` does not support libraries generated by the MATLAB Compiler SDK product.
- The MATLAB Shared Library interface does not support library functions with function pointer inputs.
- For more information, see "Limitations to Shared Library Support".

Definitions

Prototype File

A prototype file is a file of MATLAB commands which you can modify and use in place of a header file.

Thunk File

A thunk file is a compatibility layer to a 64-bit library generated by MATLAB. The name of the thunk file is `BASENAME_thunk_COMPUTER.c` where *`BASENAME`* is either the name of the shared library or, if specified, the `mfilename` prototype name. *`COMPUTER`* is the text returned by the `computer` function.

MATLAB compiles this file and creates the file `BASENAME_thunk_COMPUTER.LIBEXT`, where *`LIBEXT`* is the platform-dependent default shared library extension, for example, `dll` on Windows.

Tips

- If you have more than one library file of the same name, load the first using the library file name. Then load the additional libraries using the **`alias`** option.
- Use the **`alias`** option as an alternate name for a library. To load an alternate header file, use the `@protofile` argument.

See Also

See Also

`calllib` | `computer` | `libfunctions` | `libisloaded` | `mex` | `mexext` | `unloadlibrary`

Topics

"When to Use Prototype Files"

External Websites

Supported and Compatible Compilers

Introduced before R2006a

loadobj

Modify load process for object

Syntax

```
b = loadobj(a)
```

Description

`b = loadobj(a)` is called by the `load` function if the class of `a` defines a `loadobj` method. `load` returns `b` as the value loaded from a MAT-file.

Define a `loadobj` method when objects of the class require special processing when loaded from MAT-files. If you define a `saveobj` method, then define a `loadobj` method to restore the object to the desired state.

Define `loadobj` as a static method so it can accept as an argument whatever object or structure that you saved in the MAT-file.

When loading a subclass object, `load` calls only the subclass `loadobj` method. If a superclass defines a `loadobj` method, the subclass inherits this method. However, it is possible that the inherited method does not perform the necessary operations to load the subclass object. Consider overriding superclass `loadobj` methods.

If any superclass in a class hierarchy defines a `loadobj` method, then the subclass `loadobj` method must ensure that the subclass and superclass objects load properly. Ensure proper loading by calling the superclass `loadobj` (or other methods) from the subclass `loadobj` method.

Input Arguments

a

The input argument, `a`, can be:

- The object as loaded from the MAT-file.

- A structure created by `load` (if `load` cannot resolve the object).
- A structure returned by the `saveobj` method that was saved instead of the object.

Implement your `loadobj` method to work with scalar objects or structures. When you have saved an object array, `load` calls `loadobj` on each element of the saved array.

See Also

`load` | `save` | `saveobj`

Topics

"Save and Load Process for Objects"

Introduced before R2006a

localfunctions

Function handles to all local functions in MATLAB file

Syntax

```
fcns = localfunctions
```

Description

`fcns = localfunctions` returns a cell array of function handles, `fcns`, to all local functions in the current file.

You cannot define local functions in the context of the command line or anonymous functions, so when you call `localfunctions` from these contexts, you get an empty cell array. Within the cell array, `localfunctions` returns the function handles in an undefined order.

Examples

Create Handles to Local Functions in Function File

Create the following function in a file, `computeEllipseVals.m`, in your working folder. The function returns a cell array with handles to all the local functions.

```
function fh = computeEllipseVals
fh = localfunctions;
end

function f = computeFocus(a,b)
f = sqrt(a^2-b^2);
end

function e = computeEccentricity(a,b)
f = computeFocus(a,b);
e = f/a;
end
```

```
function ae = computeArea(a,b)
ae = pi*a*b;
end
```

At the command prompt, invoke the function to get a cell array of handles to the local functions.

```
fh = computeEllipseVals
```

```
fh =

  3×1 cell array

    @computeFocus
    @computeEccentricity
    @computeArea
```

Call a local function using its handle to compute the area of an ellipse. The `computeArea` function handle is the third element in the cell array.

```
fh{3}(3,1)
```

```
ans =

    9.4248
```

Create Handles to Local Functions in Script File

As of R2016b, you can include local functions in scripts. Therefore, you can use the `localfunctions` function to create function handles that you can invoke in the script or at the command prompt.

Create the following script in a file, `mystats.m`, in your working folder. The script creates a cell array with handles to all the local functions.

```
x = [1 3 5 7 9 10 8 6 4 2 0 -2];

avg = mymean(x)
```

```
fh = localfunctions;
med = fh{2}(x) % equivalent to med = mymedian(x,n)

function a = mymean(v)
n = length(v);
a = sum(v)/n;
end

function m = mymedian(v)
n = length(v);
w = sort(v);
if rem(n,2) == 1
    m = w((n + 1)/2);
else
    m = (w(n/2) + w(n/2 + 1))/2;
end
end
```

Run the script. MATLAB® computes the average by directly invoking the mymean local function and the median by invoking `mymedian` local function through a function handle.

```
mystats
```

```
avg =

    4.4167


med =

    4.5000
```

At the command prompt, call the `mymean` local function using its handle. Variables from the script are accessible at the command prompt. The `mymean` function handle is the first element in the cell array.

```
x2 = [1 1 2 6 24 120 720 5040];
fh
avg2 = fh{2}(x2)
```

```
fh =

  2×1 cell array

    @mymean
    @mymedian


avg2 =

    15
```

See Also

See Also

`functiontests`

Topics

"Local Functions"

Introduced in R2013b

log

Natural logarithm

Syntax

```
Y = log(X)
```

Description

`Y = log(X)` returns the natural logarithm ln(x) of each element in array `X`.

The `log` function's domain includes negative and complex numbers, which can lead to unexpected results if used unintentionally. For negative and complex numbers `z = u + i*w`, the complex logarithm `log(z)` returns

```
log(abs(z)) + 1i*angle(z)
```

If you want negative and complex numbers to return error messages rather than return complex results, use `reallog` instead.

Examples

Natural Logarithm of Negative Number

Show that the natural logarithm of -1 is $i\pi$.

```
log(-1)
```

```
ans =
   0.0000 + 3.1416i
```

Input Arguments

X — Input array
scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

`Y` — Logarithm values
scalar | vector | matrix | multidimensional array

Logarithm values, returned as a scalar, vector, matrix, or multidimensional array.

For positive real values of `X` in the interval (`0`, `Inf`), `Y` is in the interval (`-Inf`,`Inf`). For complex and negative real values of `X`, `Y` is complex. The data type of `Y` is the same as that of `X`.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- When the input value `x` is real, but the output should be complex, simulation ends with an error. To produce the complex result, make the input value complex by passing in `complex(x)`.

See Also

See Also

`exp` | `log10` | `log1p` | `log2` | `loglog` | `logm` | `reallog` | `semilogx` | `semilogy`

Introduced before R2006a

log10

Common logarithm (base 10)

Syntax

```
Y = log10(X)
```

Description

`Y = log10(X)` returns the common logarithm of each element in array `X`. The function accepts both real and complex inputs. For real values of `X` in the interval (0, `Inf`), `log10` returns real values in the interval (`-Inf` ,`Inf`). For complex and negative real values of `X`, the `log10` function returns complex values.

Examples

Calculate Scalar Common Logarithm Values

Examine several values of the base 10 logarithm function.

Calculate the common logarithm of 1.

```
log10(1)
```

```
ans = 0
```

The result is `0`, so this is the x-intercept of the `log10` function.

Calculate the common logarithm of 10.

```
log10(10)
```

```
ans = 1
```

The result is `1` since $10^1 = 10$.

Calculate the common logarithm of 100.

```
log10(100)
```

```
ans = 2
```

The result is 2 since $10^2 = 100$.

Calculate the common logarithm of 0.

```
log10(0)
```

```
ans = -Inf
```

The result is `-Inf` since $10^{-\infty} = 0$.

Real-Valued Common Logarithm

Create a vector of real numbers in the interval `[0.5,10]`.

```
X = (0.5:0.5:10)';
```

Calculate the common logarithm of `X`.

```
Y = log10(X)
```

```
Y =

   -0.3010
         0
    0.1761
    0.3010
    0.3979
    0.4771
    0.5441
    0.6021
    0.6532
    0.6990
```

Complex-Valued Common Logarithm

Create two Cartesian grids for `X` and `Y`.

```
[X,Y] = meshgrid(0:0.5:1.5,-2:0.5:2);
```

Calculate the complex base 10 logarithm $log_{10}(X + iY)$ on the grid. Use `1i` for improved speed and robustness with complex arithmetic.

```
Z = log10(X + 1i*Y)
```

```
Z =
   0.3010 - 0.6822i   0.3142 - 0.5758i   0.3495 - 0.4808i   0.3979 - 0.4027i
   0.1761 - 0.6822i   0.1990 - 0.5425i   0.2559 - 0.4268i   0.3266 - 0.3411i
   0.0000 - 0.6822i   0.0485 - 0.4808i   0.1505 - 0.3411i   0.2559 - 0.2554i
  -0.3010 - 0.6822i  -0.1505 - 0.3411i   0.0485 - 0.2014i   0.1990 - 0.1397i
     -Inf + 0.0000i  -0.3010 + 0.0000i   0.0000 + 0.0000i   0.1761 + 0.0000i
  -0.3010 + 0.6822i  -0.1505 + 0.3411i   0.0485 + 0.2014i   0.1990 + 0.1397i
   0.0000 + 0.6822i   0.0485 + 0.4808i   0.1505 + 0.3411i   0.2559 + 0.2554i
   0.1761 + 0.6822i   0.1990 + 0.5425i   0.2559 + 0.4268i   0.3266 + 0.3411i
   0.3010 + 0.6822i   0.3142 + 0.5758i   0.3495 + 0.4808i   0.3979 + 0.4027i
```

Input Arguments

X — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`exp` | `log` | `log1p` | `log2` | `loglog` | `logm` | `reallog` | `semilogx` | `semilogy`

Introduced before R2006a

log1p

Compute log(1+x) accurately for small values of x

Syntax

```
y = log1p(x)
```

Description

`y = log1p(x)` computes `log(1+x)`, compensating for the roundoff in `1+x`. `log1p(x)` is more accurate than `log(1+x)` for small values of x. For small `x`, `log1p(x)` is approximately `x`, whereas `log(1+x)` can be zero.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`log` | `expm1`

Introduced before R2006a

log2

Base 2 logarithm and dissect floating-point numbers into exponent and mantissa

Syntax

```
Y = log2(X)
[F,E] = log2(X)
```

Description

`Y = log2(X)` computes the base 2 logarithm of the elements of `X`.

`[F,E] = log2(X)` returns arrays `F` and `E`. Argument `F` is an array of real values, usually in the range `0.5 <= abs(F) < 1`. For real `X`, `F` satisfies the equation: `X = F.*2.^E`. Argument `E` is an array of integers that, for real `X`, satisfy the equation: `X = F.*2.^E`.

Examples

For IEEE arithmetic, the statement `[F,E] = log2(X)` yields the values:

X	F	E
1	1/2	1
pi	pi/4	2
-3	-3/4	2
eps	1/2	-51
realmax	1-eps/2	1024
realmin	1/2	-1021

Tips

This function corresponds to the ANSI C function `frexp()` and the IEEE floating-point standard function `logb()`. Any zeros in `X` produce `F = 0` and `E = 0`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`log` | `pow2`

Introduced before R2006a

logical

Convert numeric values to logicals

Syntax

```
L = logical(A)
```

Description

`L = logical(A)` converts `A` into an array of logical values. Any nonzero element of `A` is converted to logical `1` (`true`) and zeros are converted to logical `0` (`false`). Complex values and NaNs cannot be converted to logical values and result in a conversion error.

Examples

Pick Odd Elements from Numeric Matrix

Pick out the odd-numbered elements of a numeric matrix.

Create a numeric matrix.

```
A = [1 -3 2;5 4 7;-8 1 3];
```

Find the modulus, `mod(A,2)`, and convert it to a logical array for indexing.

```
L = logical(mod(A,2))
```

```
L = 3×3 logical array
   1   1   0
   1   0   1
   0   1   1
```

The array has logical `1` (`true`) values where `A` is odd.

Use `L` as a logical index to pick out the odd elements of `A`.

```
A(L)
```

```
ans =

     1
     5
    -3
     1
     7
     3
```

The result is a vector containing all odd elements of A.

Use the logical NOT operator, ~, on L to find the even elements of A.

```
A(~L)
```

```
ans =

    -8
     4
     2
```

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`

Tips

- Most arithmetic operations involving logical arrays return double values. For example, adding zero to a logical array returns a double array.
- Logical arrays also are created by the relational operators (==,<,>,~, etc.) and functions like `any`, `all`, `isnan`, `isinf`, and `isfinite`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`false` | `islogical` | `true`

Topics

“Using Logicals in Array Indexing”
“Determine if Arrays Are Logical”

Introduced before R2006a

loglog

Log-log scale plot



Syntax

```
loglog(Y)
loglog(X1,Y1,...)
loglog(X1,Y1,LineSpec,...)
loglog(...,'PropertyName',PropertyValue,...)
loglog(ax,...)
h = loglog(...)
```

Description

`loglog(Y)` plots the columns of `Y` versus their index if `Y` contains real numbers. If `Y` contains complex numbers, `loglog(Y)` and `loglog(real(Y),imag(Y))` are equivalent. `loglog` ignores the imaginary component in all other uses of this function.

`loglog(X1,Y1,...)` plots all `Yn` versus `Xn` pairs. If only one of `Xn` or `Yn` is a matrix, `loglog` plots the vector argument versus the rows or columns of the matrix, along the dimension of the matrix whose length matches the length of the vector. If the matrix is square, its columns plot against the vector if their lengths match.

`loglog(X1,Y1,LineSpec,...)` plots all lines defined by the `Xn,Yn,LineSpec` triples, where `LineSpec` determines line type, marker symbol, and color of the plotted lines. You can mix `Xn,Yn,LineSpec` triples with `Xn,Yn` pairs, for example,

```
loglog(X1,Y1,X2,Y2,LineSpec,X3,Y3)
```

`loglog(...,'PropertyName',PropertyValue,...)` sets line property values for all the charting lines created. For a list of properties, see Chart Line Properties.

`loglog(ax,...)` creates the line in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = loglog(...)` returns a column vector of chart line objects.

If you do not specify a color when plotting more than one line, `loglog` automatically cycles through the colors and line styles in the order specified by the current axes.

If you attempt to add a `loglog`, `semilogx`, or `semilogy` plot to a linear axis mode graph with `hold on`, the axis mode remains as it is and the new data plots as linear.

Examples

Logarithmic Scale for Both Axes

Create a plot using a logarithmic scale for both the x-axis and the y-axis. Use a line with square markers. Display the grid.

```
x = logspace(-1,2);
y = exp(x);
loglog(x,y,'-s')
grid on
```

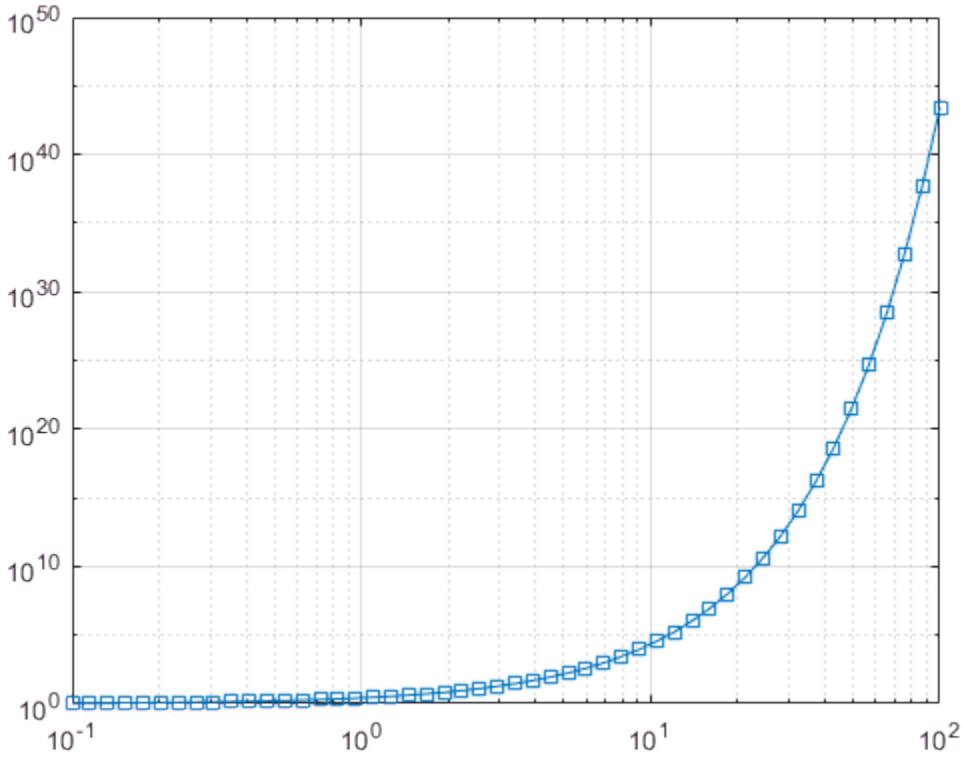

See Also

See Also

Functions
`LineSpec` | `plot` | `semilogx` | `semilogy`

Properties
Chart Line Properties

Introduced before R2006a

logm

Matrix logarithm

Syntax

```
L = logm(A)
[L,exitflag] = logm(A)
```

Description

`L = logm(A)` is the principal matrix logarithm of `A`, the inverse of `expm(A)`. The output, `L`, is the unique logarithm for which every eigenvalue has imaginary part lying strictly between $-\pi$ and π. If `A` is singular or has any eigenvalues on the negative real axis, then the principal logarithm is undefined. In this case, `logm` computes a nonprincipal logarithm and returns a warning message.

`[L,exitflag] = logm(A)` returns a scalar `exitflag` that describes the exit condition of `logm`:

- If `exitflag = 0`, the algorithm was successfully completed.
- If `exitflag = 1`, too many matrix square roots had to be computed. However, the computed value of `L` might still be accurate.

Examples

Compare Matrix Logarithms

Calculate the matrix exponential of a matrix, `A`.

```
A = [1 1 0; 0 0 2; 0 0 -1];
Y = expm(A)
```

```
Y =

    2.7183    1.7183    1.0862
```

```
         0    1.0000    1.2642
         0         0    0.3679
```

Calculate the matrix logarithm of `Y` to reproduce the original matrix, `A`.

```
P = logm(Y)
```

```
P =

    1.0000    1.0000    0.0000
         0         0    2.0000
         0         0   -1.0000
```

`log(A)` involves taking the logarithm of zero, so it produces inferior results.

```
Q = log(A)
```

```
Q =
   0.0000 + 0.0000i   0.0000 + 0.0000i     -Inf + 0.0000i
     -Inf + 0.0000i     -Inf + 0.0000i   0.6931 + 0.0000i
     -Inf + 0.0000i     -Inf + 0.0000i   0.0000 + 3.1416i
```

Input Arguments

A — Input matrix

square matrix

Input matrix, specified as a square matrix.

Data Types: `single` | `double`
Complex Number Support: Yes

Tips

- If `A` is real symmetric or complex Hermitian, then so is `logm(A)`.
- Some matrices, like `A = [0 1; 0 0]`, do not have any logarithms, real or complex, so `logm` cannot be expected to produce one.

Algorithms

The algorithm `logm` uses is described in [1] and [2].

References

[1] Al-Mohy, A. H. and Nicholas J. Higham, "Improved inverse scaling and squaring algorithms for the matrix logarithm," *SIAM J. Sci. Comput.*, 34(4), pp. C153–C169, 2012

[2] Al-Mohy, A. H., Higham, Nicholas J. and Samuel D. Relton, "Computing the Frechet derivative of the matrix logarithm and estimating the condition number," *SIAM J. Sci. Comput.,*, 35(4), pp. C394–C410, 2013

See Also

See Also

`expm` | `funm` | `sqrtm`

Introduced before R2006a

logspace

Generate logarithmically spaced vector

Syntax

```
y = logspace(a,b)
y = logspace(a,b,n)
y = logspace(a,pi)
```

Description

`y = logspace(a,b)` generates a row vector `y` of 50 logarithmically spaced points between decades `10^a` and `10^b`. The `logspace` function is especially useful for creating frequency vectors. The function is the logarithmic equivalent of `linspace` and the '`:`' operator.

`y = logspace(a,b,n)` generates `n` points between decades `10^a` and `10^b`.

`y = logspace(a,pi)` generates points between `10^a` and `pi`, which is useful in digital signal processing for creating logarithmically spaced frequencies in the interval `[10^a,pi]`.

Examples

Vector of Logarithmically Spaced Numbers

Create a vector of 50 logarithmically spaced points in the interval `[10^1,10^5]`.

```
y = logspace(1,5);
```

Vector with Specified Number of Values

Create a vector of 7 logarithmically spaced points in the interval `[10^1,10^5]`.

```
y1 = logspace(1,5,7)
```

```
y1 =

   1.0e+05 *

    0.0001    0.0005    0.0022    0.0100    0.0464    0.2154    1.0000
```

Vector of Logarithmically Spaced Complex Numbers

Create a vector of complex numbers with 8 logarithmically spaced points between `10^(1+2i) and 10^(5+5i)`.

```
y = logspace(1+2i,5+5i,8)
```

```
y =
   1.0e+04 *

  -0.0001 - 0.0010i   0.0029 - 0.0024i   0.0133 + 0.0040i   0.0147 + 0.0497i  -0.1242 -
```

Input Arguments

a — First bound

numeric scalar

First bound, specified as a numeric scalar. The `a` argument defines a bound of the interval over which `logspace` generates points. `a` can be real or complex, and the other bound, `b`, can be either larger or smaller than `a`. If `b` is smaller than `a`, then the vector contains descending values.

Data Types: `single` | `double`
Complex Number Support: Yes

b — Second bound

numeric scalar

Second bound, specified as a numeric scalar. The `b` argument defines a bound of the interval over which `logspace` generates points. `b` can be real or complex, and `b` can be either larger or smaller than the other bound, `a`. If `b` is smaller than `a`, then the vector contains descending values.

Data Types: `single` | `double`
Complex Number Support: Yes

n — Number of points

50 (default) | real numeric scalar

Number of points, specified as a real numeric scalar.

- If `n` is `1`, `logspace` returns `10^b`.
- If `n` is zero or negative, `logspace` returns an empty row vector.
- If `n` is not an integer, `logspace` rounds `n` down and returns `floor(n)` points.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`colon` | `linspace`

Introduced before R2006a

lookfor

Search for keyword in all help entries

Syntax

```
lookfor topic
lookfor topic -all
```

Description

`lookfor topic` searches for the character vector `topic` in the first comment line (the H1 line) of the help text in all MATLAB program files found on the search path. For all files in which a match occurs, `lookfor` displays the H1 line.

`lookfor topic -all` searches the entire first comment block of a MATLAB program file looking for `topic`.

Examples

For example:

```
lookfor inverse
```

finds at least a dozen matches, including H1 lines containing "inverse hyperbolic cosine," "two-dimensional inverse FFT," and "pseudoinverse." Contrast this with

```
which inverse
```

or

```
what inverse
```

These functions run more quickly, but probably fail to find anything because MATLAB does not have a function `inverse`.

In summary, `what` lists the functions in a given folder, `which` finds the folder containing a given function or file, and `lookfor` finds all functions in all folders that might have something to do with a given keyword.

Even more extensive than the `lookfor` function are the find features in the Current Folder browser. For example, you can look for all occurrences of a specified word in all the MATLAB program files in the current folder and its subfolders. For more information, see “Find Files and Folders”.

Alternatives

As an alternative to the `lookfor` function, use the Function Browser.

See Also

`dir` | `doc` | `filebrowser` | `strfind` | `help` | `regexp` | `what` | `which` | `who`

Topics

“Find Functions to Use”
“Search Syntax and Tips”

Introduced before R2006a

lower

Convert string to lowercase

Syntax

```
newTxt = lower(txt)
```

Description

`newTxt = lower(txt)` converts all uppercase characters in `txt` to the corresponding lowercase characters and leaves all other characters unchanged.

Examples

Convert Character Vector to Lowercase

```
txt = 'Hello, World.';
newTxt = lower(txt)
```

```
newTxt =
'hello, world.'
```

Convert String Array to Lowercase

Starting in R2017a, you can create string arrays using double quotes instead of the `string` function.

Convert a string array to contain lowercase characters.

```
txt = ["The SOONER,";"the BETTER."]
```

```
txt = 2×1 string array
    "The SOONER,"
    "the BETTER."
```

```
newTxt = lower(txt)
```

```
newTxt = 2×1 string array
    "the sooner,"
    "the better."
```

Text processing functions, such as `strfind` and `regexp`, accept string arrays as inputs. Other functions, such as `addpath`, do not.

- "Create Character Arrays"
- "Create String Arrays"
- "Analyze Text Data with String Arrays"
- "Search and Replace Text"

Input Arguments

`txt` — Input array

string array | character array | cell array of character vectors

Input array, specified as a string array, character array, or cell array of character vectors.

Example:

Data Types: `string` | `char` | `cell`

Tips

For character arrays, the `lower` function supports only the character sets:

- PC: Windows Latin-1
- Other: ISO® Latin-1 (ISO 8859-1)

For string arrays, the `lower` function supports Unicode.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input array must be specified as a character array. Cell arrays are not supported.
- Input values must be in the range 0-127.

See Also

See Also

`char` | `isstrprop` | `reverse` | `string` | `upper`

Topics

“Create Character Arrays”
“Create String Arrays”
“Analyze Text Data with String Arrays”
“Search and Replace Text”

Introduced before R2006a

ls

List folder contents

Syntax

```
ls
ls name
list = ls( ___ )
```

Description

`ls` lists the contents of the current folder.

`ls name` lists the files and folders in the current folder that match the specified name.

`list = ls( ___ )` returns the names of all the files and folders in the current folder that match the specified `name`. You can specify `list` with any of the arguments in the previous syntaxes.

Examples

List Files and Folders

List all the files and folders with names that contain `my`.

```
ls *my*
```

```
my_class.m     my_function.m  my_script.m    my_text.txt
```

List all the files and folders with a `.m` extension.

```
ls *.m
```

```
my_class.m       my_function.m    my_script.m      test_function.m
```

Save List of Files and Folders

Save a list of the names of all the files and folders in the current folder to the variable `MyList`.

```
MyList = ls;
```

Input Arguments

`name` — Name of file or folder

character vector

Name of file or folder, specified as a character vector. Use the `'*'` wildcard to match patterns. For example, `ls *.m` lists all files and folders with a `.m` extension, and `ls m*` lists all files and folders with names that begin with the letter `m`.

Output Arguments

`list` — List of files and folders

character array

List of files and folders, specified as a character array in one of these formats.

- **UNIX platforms** – `list` is a character vector of names separated by **tab** and **space** characters.
- **Microsoft Windows platforms** – `list` is an `m`-by-`n` character array of names. `m` is the number of names and `n` is the number of characters in the longest name. MATLAB pads names shorter than `n` characters with space characters.

Tips

- To further modify the results of the `ls` command on UNIX platforms, you can add any flags that the operating system supports. For example, `ls -c` displays files by timestamp and `ls -d` displays only directories. For more information, see the UNIX `ls` documentation.

Alternatives

Use the `dir` command to return file attributes for each file and folder in the output argument.

You can also view files and folders in the Current Folder browser by issuing the `filebrowser` command.

See Also

See Also

`dir` | `pwd`

Introduced before R2006a

lscov

Least-squares solution in presence of known covariance

Syntax

```
x = lscov(A,B)
x = lscov(A,B,w)
x = lscov(A,B,V)
x = lscov(A,B,V,alg)
[x,stdx] = lscov(...)
[x,stdx,mse] = lscov(...)
[x,stdx,mse,S] = lscov(...)
```

Description

`x = lscov(A,B)` returns the ordinary least squares solution to the linear system of equations `A*x = B`, i.e., `x` is the n-by-1 vector that minimizes the sum of squared errors `(B - A*x)'*(B - A*x)`, where `A` is m-by-n, and `B` is m-by-1. `B` can also be an m-by-k matrix, and `lscov` returns one solution for each column of `B`. When `rank(A) < n`, `lscov` sets the maximum possible number of elements of `x` to zero to obtain a "basic solution".

`x = lscov(A,B,w)`, where `w` is a vector length m of real positive weights, returns the weighted least squares solution to the linear system `A*x = B`, that is, `x` minimizes `(B - A*x)'*diag(w)*(B - A*x)`. `w` typically contains either counts or inverse variances.

`x = lscov(A,B,V)`, where `V` is an m-by-m real symmetric positive definite matrix, returns the generalized least squares solution to the linear system `A*x = B` with covariance matrix proportional to `V`, that is, `x` minimizes `(B - A*x)'*inv(V)*(B - A*x)`.

More generally, `V` can be positive semidefinite, and `lscov` returns `x` that minimizes `e'*e`, subject to `A*x + T*e = B`, where the minimization is over `x` and `e`, and `T*T' = V`. When `V` is semidefinite, this problem has a solution only if `B` is consistent with `A` and `V` (that is, `B` is in the column space of `[A T]`), otherwise `lscov` returns an error.

By default, `lscov` computes the Cholesky decomposition of `V` and, in effect, inverts that factor to transform the problem into ordinary least squares. However, if `lscov` determines that `V` is semidefinite, it uses an orthogonal decomposition algorithm that avoids inverting `V`.

`x = lscov(A,B,V,alg)` specifies the algorithm used to compute `x` when `V` is a matrix. `alg` can have the following values:

- `'chol'` uses the Cholesky decomposition of `V`.
- `'orth'` uses orthogonal decompositions, and is more appropriate when `V` is ill-conditioned or singular, but is computationally more expensive.

`[x,stdx] = lscov(...)` returns the estimated standard errors of `x`. When `A` is rank deficient, `stdx` contains zeros in the elements corresponding to the necessarily zero elements of `x`.

`[x,stdx,mse] = lscov(...)` returns the mean squared error. If `B` is assumed to have covariance matrix σ^2`V` (or (σ^2)×`diag`(1./`W`)), then `mse` is an estimate of σ^2.

`[x,stdx,mse,S] = lscov(...)` returns the estimated covariance matrix of `x`. When `A` is rank deficient, `S` contains zeros in the rows and columns corresponding to the necessarily zero elements of `x`. `lscov` cannot return `S` if it is called with multiple right-hand sides, that is, if `size(B,2) > 1`.

The standard formulas for these quantities, when `A` and `V` are full rank, are

- `x = inv(A'*inv(V)*A)*A'*inv(V)*B`
- `mse = B'*(inv(V) - inv(V)*A*inv(A'*inv(V)*A)*A'*inv(V))*B./(m-n)`
- `S = inv(A'*inv(V)*A)*mse`
- `stdx = sqrt(diag(S))`

However, `lscov` uses methods that are faster and more stable, and are applicable to rank deficient cases.

`lscov` assumes that the covariance matrix of `B` is known only up to a scale factor. `mse` is an estimate of that unknown scale factor, and `lscov` scales the outputs `S` and `stdx` appropriately. However, if `V` is known to be exactly the covariance matrix of `B`, then that scaling is unnecessary. To get the appropriate estimates in this case, you should rescale `S` and `stdx` by `1/mse` and `sqrt(1/mse)`, respectively.

Examples

Example 1 — Computing Ordinary Least Squares

The MATLAB backslash operator (\) enables you to perform linear regression by computing ordinary least-squares (OLS) estimates of the regression coefficients. You can also use `lscov` to compute the same OLS estimates. By using `lscov`, you can also compute estimates of the standard errors for those coefficients, and an estimate of the standard deviation of the regression error term:

```
x1 = [.2 .5 .6 .8 1.0 1.1]';
x2 = [.1 .3 .4 .9 1.1 1.4]';
X = [ones(size(x1)) x1 x2];
y = [.17 .26 .28 .23 .27 .34]';

a = X\y
a =
    0.1203
    0.3284
   -0.1312

[b,se_b,mse] = lscov(X,y)
b =
    0.1203
    0.3284
   -0.1312
se_b =
    0.0643
    0.2267
    0.1488
mse =
    0.0015
```

Example 2 — Computing Weighted Least Squares

Use `lscov` to compute a weighted least-squares (WLS) fit by providing a vector of relative observation weights. For example, you might want to downweight the influence of an unreliable observation on the fit:

```
w = [1 1 1 1 1 .1]';

[bw,sew_b,msew] = lscov(X,y,w)
```

```
bw =
    0.1046
    0.4614
   -0.2621
sew_b =
    0.0309
    0.1152
    0.0814
msew =
  3.4741e-004
```

Example 3 — Computing General Least Squares

Use `lscov` to compute a general least-squares (GLS) fit by providing an observation covariance matrix. For example, your data may not be independent:

```
V = .2*ones(length(x1)) + .8*diag(ones(size(x1)));

[bg,sew_b,mseg] = lscov(X,y,V)
bg =
    0.1203
    0.3284
   -0.1312
sew_b =
    0.0672
    0.2267
    0.1488
mseg =
    0.0019
```

Example 4 — Estimating the Coefficient Covariance Matrix

Compute an estimate of the coefficient covariance matrix for either OLS, WLS, or GLS fits. The coefficient standard errors are equal to the square roots of the values on the diagonal of this covariance matrix:

```
[b,se_b,mse,S] = lscov(X,y);

S
S =
    0.0041   -0.0130    0.0075
   -0.0130    0.0514   -0.0328
    0.0075   -0.0328    0.0221
```

```
[se_b sqrt(diag(S))]
ans =
    0.0643    0.0643
    0.2267    0.2267
    0.1488    0.1488
```

Algorithms

The vector `x` minimizes the quantity `(A*x-B)'*inv(V)*(A*x-B)`. The classical linear algebra solution to this problem is

```
x = inv(A'*inv(V)*A)*A'*inv(V)*B
```

but the `lscov` function instead computes the QR decomposition of `A` and then modifies `Q` by `V`.

References

[1] Strang, G., *Introduction to Applied Mathematics*, Wellesley-Cambridge, 1986, p. 398.

See Also

See Also

`lsqnonneg` | `mldivide` | `mrdivide` | `qr`

Introduced before R2006a

lsqnonneg

Solve nonnegative linear least-squares problem

Solve nonnegative least-squares curve fitting problems of the form

$$\min_x \|C \cdot x - d\|_2^2, \text{ where } x \geq 0.$$

Syntax

```
x = lsqnonneg(C,d)
x = lsqnonneg(C,d,options)
x = lsqnonneg(problem)
[x,resnorm,residual] = lsqnonneg( ___ )
[x,resnorm,residual,exitflag,output] = lsqnonneg( ___ )
[x,resnorm,residual,exitflag,output,lambda] = lsqnonneg( ___ )
```

Description

`x = lsqnonneg(C,d)` returns the vector `x` that minimizes `norm(C*x-d)` subject to `x ≥ 0`. Arguments `C` and `d` must be real.

`x = lsqnonneg(C,d,options)` minimizes with the optimization options specified in the structure `options`. Use `optimset` to set these options.

`x = lsqnonneg(problem)` finds the minimum for `problem`, where `problem` is a structure.

`[x,resnorm,residual] = lsqnonneg( ___ )`, for any previous syntax, additionally returns the value of the squared 2-norm of the residual, `norm(C*x-d)^2`, and returns the residual `d-C*x`.

`[x,resnorm,residual,exitflag,output] = lsqnonneg( ___ )` additionally returns a value `exitflag` that describes the exit condition of `lsqnonneg`, and a structure `output` with information about the optimization process.

`[x,resnorm,residual,exitflag,output,lambda] = lsqnonneg(___)` additionally returns the Lagrange multiplier vector `lambda`.

Examples

Nonnegative Linear Least Squares

Compute a nonnegative solution to a linear least-squares problem, and how to compare the result to the solution of an unconstrained problem.

Prepare a `C` matrix and `d` vector for the problem $\min ||Cx - d||$.

```
C = [0.0372    0.2869
     0.6861    0.7071
     0.6233    0.6245
     0.6344    0.6170];

d = [0.8587
     0.1781
     0.0747
     0.8405];
```

Compute the constrained and unconstrained solutions.

```
x = lsqnonneg(C,d)
```

```
x =

         0
    0.6929
```

```
xunc = C\d
```

```
xunc =

   -2.5627
    3.1108
```

All entries in `x` are nonnegative, but some entries in `xunc` are negative.

Compute the norms of the residuals for the two solutions.

```
constrained_norm = norm(C*x - d)
```

```
constrained_norm = 0.9118
```

```
unconstrained_norm = norm(C*xunc - d)
```

```
unconstrained_norm = 0.6674
```

The unconstrained solution has a smaller residual norm because constraints can only increase a residual norm.

Nonnegative Least Squares with Nondefault Options

Set the `Display` option to `'final'` to see output when `lsqnonneg` finishes.

Create the options.

```
options = optimset('Display','final');
```

Prepare a `C` matrix and `d` vector for the problem $\min ||Cx - d||$.

```
C = [0.0372    0.2869
     0.6861    0.7071
     0.6233    0.6245
     0.6344    0.6170];

d = [0.8587
     0.1781
     0.0747
     0.8405];
```

Call `lsqnonneg` with the options structure.

```
x = lsqnonneg(C,d,options);
```

```
Optimization terminated.
```

Obtain Residuals from Nonnegative Least Squares

Call `lsqnonneg` with outputs to obtain the solution, residual norm, and residual vector.

Prepare a `C` matrix and `d` vector for the problem $\min ||Cx - d||$.

```
C = [0.0372    0.2869
     0.6861    0.7071
     0.6233    0.6245
     0.6344    0.6170];

d = [0.8587
     0.1781
     0.0747
     0.8405];
```

Obtain the solution and residual information.

```
 [x,resnorm,residual] = lsqnonneg(C,d)
```

```
x =

         0
    0.6929


resnorm = 0.8315

residual =

    0.6599
   -0.3119
   -0.3580
    0.4130
```

Verify that the returned residual norm is the square of the norm of the returned residual vector.

```
 norm(residual)^2
```

```
ans = 0.8315
```

Inspect the Result of Nonnegative Least Squares

Request all output arguments to examine the solution and solution process after `lsqnonneg` finishes.

Prepare a `C` matrix and `d` vector for the problem $\min ||Cx - d||$.

```
C = [0.0372    0.2869
     0.6861    0.7071
     0.6233    0.6245
     0.6344    0.6170];

d = [0.8587
     0.1781
     0.0747
     0.8405];
```

Solve the problem, requesting all output arguments.

```
[x,resnorm,residual,exitflag,output,lambda] = lsqnonneg(C,d)
```

```
x =

         0
    0.6929


resnorm = 0.8315

residual =

    0.6599
   -0.3119
   -0.3580
    0.4130


exitflag = 1

output = struct with fields:
    iterations: 1
     algorithm: 'active-set'
       message: 'Optimization terminated.'


lambda =

   -0.1506
   -0.0000
```

`exitflag` is `1`, indicating a correct solution.

`x(1) = 0`, and the corresponding `lambda(1)` $\neq$ `0`, showing the correct duality. Similarly, `x(2) > 0`, and the corresponding `lambda(2) = 0`.

Input Arguments

`C` — Linear multiplier

real matrix

Linear multiplier, specified as a real matrix. Represents the variable C in the problem

$$\min_x \|C \cdot x - d\|_2^2, \text{ where } x \geq 0.$$

For compatibility, the number of rows of `C` must equal the length of `d`.

Example: `C = [1,2;3,-1;-4,4]`

Data Types: `double`

`d` — Additive term

real vector

Additive term, specified as a real vector. Represents the variable d in the problem

$$\min_x \|C \cdot x - d\|_2^2, \text{ where } x \geq 0.$$

For compatibility, the length of `d` must equal the number of rows of `C`.

Example: `d = [1;-6;5]`

Data Types: `double`

`options` — Optimization options

structure such as `optimset` returns

Optimization options, specified as a structure such as `optimset` returns. You can use `optimset` to set or change the values of these fields in the options structure. See "Set Options" for detailed information.

`Display`	Level of display: • `'notify'` (default) displays output only if the function does not converge. • `'off'` or `'none'` displays no output. • `'final'` displays just the final output.
`TolX`	Termination tolerance on `x`, a positive scalar. The default is `10*eps*norm(C,1)*length(C)`. See "Tolerances and Stopping Criteria".

Example: `options = optimset('Display','final')`

Data Types: `struct`

`problem` — Problem structure
structure

Problem structure, specified as a structure with the following fields.

Field Name	Entry
`C`	Real matrix
`d`	Real vector
`solver`	`'lsqnonneg'`
`options`	Options structure such as returned by `optimset`

The simplest way to obtain a `problem` structure is to export the problem from the Optimization app.

Data Types: `struct`

Output Arguments

`x` — Solution
real vector

Solution, returned as a real vector. The length of `x` is the same as the length of `d`.

`resnorm` — Squared residual norm
nonnegative scalar

Squared residual norm, returned as a nonnegative scalar. Equal to `norm(C*x-d)^2`.

`residual` — Residual
real vector

Residual, returned as a real vector. The residual is `d - C*x`.

`exitflag` — Reason `lsqnonneg` stopped
integer

Reason `lsqnonneg` stopped, returned as an integer.

`1`	Function converged to a solution `x`.
`0`	Number of iterations exceeded `options.MaxIter`.

`output` — Information about the optimization process
structure

Information about the optimization process, returned as a structure with fields:

`iterations`	Number of iterations taken
`algorithm`	`'active-set'`
`message`	Exit message

`lambda` — Lagrange multipliers
real vector

Lagrange multipliers, returned as a real vector. The entries satisfy the complementarity condition `x'*lambda = 0`. This means `lambda(i) < 0` when `x(i)` is approximately `0`, and `lambda(i)` is approximately `0` when `x(i) > 0`.

Algorithms

`lsqnonneg` uses the algorithm described in [1]. The algorithm starts with a set of possible basis vectors and computes the associated dual vector `lambda`. It then selects the basis vector corresponding to the maximum value in `lambda` to swap it out of the basis in exchange for another possible candidate. This continues until `lambda ≤ 0`.

References

[1] Lawson, C. L. and R. J. Hanson. *Solving Least-Squares Problems*. Upper Saddle River, NJ: Prentice Hall. 1974. Chapter 23, p. 161.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

For C/C++ code generation:

- You must enable support for variable-size arrays.
- The exit message in the output structure is not translated.

See Also

See Also

`mldivide` | `optimset`

Introduced before R2006a

lsqr

LSQR method

Syntax

```
x = lsqr(A,b)
lsqr(A,b,tol)
lsqr(A,b,tol,maxit)
lsqr(A,b,tol,maxit,M)
lsqr(A,b,tol,maxit,M1,M2)
lsqr(A,b,tol,maxit,M1,M2,x0)
[x,flag] = lsqr(A,b,tol,maxit,M1,M2,x0)
[x,flag,relres] = lsqr(A,b,tol,maxit,M1,M2,x0)
[x,flag,relres,iter] = lsqr(A,b,tol,maxit,M1,M2,x0)
[x,flag,relres,iter,resvec] = lsqr(A,b,tol,maxit,M1,M2,x0)
[x,flag,relres,iter,resvec,lsvec] = lsqr(A,b,tol,maxit,M1,M2,x0)
```

Description

`x = lsqr(A,b)` attempts to solve the system of linear equations `A*x=b` for `x` if `A` is consistent, otherwise it attempts to solve the least squares solution `x` that minimizes `norm(b-A*x)`. The `m`-by-`n` coefficient matrix `A` need not be square but it should be large and sparse. The column vector `b` must have length `m`. You can specify `A` as a function handle, `afun`, such that `afun(x,'notransp')` returns `A*x` and `afun(x,'transp')` returns `A'*x`.

"Parameterizing Functions" explains how to provide additional parameters to the function `afun`, as well as the preconditioner function `mfun` described below, if necessary.

If `lsqr` converges, a message to that effect is displayed. If `lsqr` fails to converge after the maximum number of iterations or halts for any reason, a warning message is printed displaying the relative residual `norm(b-A*x)/norm(b)` and the iteration number at which the method stopped or failed.

`lsqr(A,b,tol)` specifies the tolerance of the method. If `tol` is `[]`, then `lsqr` uses the default, `1e-6`.

`lsqr(A,b,tol,maxit)` specifies the maximum number of iterations.

`lsqr(A,b,tol,maxit,M)` and `lsqr(A,b,tol,maxit,M1,M2)` use `n`-by-`n` preconditioner `M` or `M = M1*M2` and effectively solve the system `A*inv(M)*y = b` for `y`, where `y = M*x`. If `M` is `[]` then `lsqr` applies no preconditioner. `M` can be a function `mfun` such that `mfun(x,'notransp')` returns `M\x` and `mfun(x,'transp')` returns `M'\x`.

`lsqr(A,b,tol,maxit,M1,M2,x0)` specifies the `n`-by-`1` initial guess. If `x0` is `[]`, then `lsqr` uses the default, an all zero vector.

`[x,flag] = lsqr(A,b,tol,maxit,M1,M2,x0)` also returns a convergence flag.

Flag	Convergence
0	`lsqr` converged to the desired tolerance `tol` within `maxit` iterations.
1	`lsqr` iterated `maxit` times but did not converge.
2	Preconditioner `M` was ill-conditioned.
3	`lsqr` stagnated. (Two consecutive iterates were the same.)
4	One of the scalar quantities calculated during `lsqr` became too small or too large to continue computing.

Whenever `flag` is not `0`, the solution `x` returned is that with minimal norm residual computed over all the iterations. No messages are displayed if you specify the `flag` output.

`[x,flag,relres] = lsqr(A,b,tol,maxit,M1,M2,x0)` also returns an estimate of the relative residual `norm(b-A*x)/norm(b)`. If `flag` is `0`, `relres <= tol`.

`[x,flag,relres,iter] = lsqr(A,b,tol,maxit,M1,M2,x0)` also returns the iteration number at which `x` was computed, where `0 <= iter <= maxit`.

`[x,flag,relres,iter,resvec] = lsqr(A,b,tol,maxit,M1,M2,x0)` also returns a vector of the residual norm estimates at each iteration, including `norm(b-A*x0)`.

`[x,flag,relres,iter,resvec,lsvec] = lsqr(A,b,tol,maxit,M1,M2,x0)` also returns a vector of estimates of the scaled normal equations residual at each iteration: `norm((A*inv(M))'*(B-A*X))/norm(A*inv(M),'fro')`. Note that the estimate of `norm(A*inv(M),'fro')` changes, and hopefully improves, at each iteration.

Examples

Example 1

```
n = 100;
on = ones(n,1);
A = spdiags([-2*on 4*on -on],-1:1,n,n);
b = sum(A,2);
tol = 1e-8;
maxit = 15;
M1 = spdiags([on/(-2) on],-1:0,n,n);
M2 = spdiags([4*on -on],0:1,n,n);

x = lsqr(A,b,tol,maxit,M1,M2);
```

displays the following message:

```
lsqr converged at iteration 11 to a solution with relative
residual 3.5e-009
```

Example 2

This example replaces the matrix `A` in Example 1 with a handle to a matrix-vector product function `afun`. The example is contained in a function `run_lsqr` that

- Calls `lsqr` with the function handle `@afun` as its first argument.
- Contains `afun` as a nested function, so that all variables in `run_lsqr` are available to `afun`.

The following shows the code for `run_lsqr`:

```
function x1 = run_lsqr
n = 100;
on = ones(n,1);
A = spdiags([-2*on 4*on -on],-1:1,n,n);
b = sum(A,2);
tol = 1e-8;
maxit = 15;
M1 = spdiags([on/(-2) on],-1:0,n,n);
M2 = spdiags([4*on -on],0:1,n,n);
x1 = lsqr(@afun,b,tol,maxit,M1,M2);
```

```
    function y = afun(x,transp_flag)
       if strcmp(transp_flag,'transp')      % y = A'*x
          y = 4 * x;
          y(1:n-1) = y(1:n-1) - 2 * x(2:n);
          y(2:n) = y(2:n) - x(1:n-1);
       elseif strcmp(transp_flag,'notransp') % y = A*x
          y = 4 * x;
          y(2:n) = y(2:n) - 2 * x(1:n-1);
          y(1:n-1) = y(1:n-1) - x(2:n);
       end
    end
end
```

When you enter

```
x1=run_lsqr;
```

MATLAB software displays the message

```
lsqr converged at iteration 11 to a solution with relative
residual 3.5e-009
```

References

[1] Barrett, R., M. Berry, T. F. Chan, et al., *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*, SIAM, Philadelphia, 1994.

[2] Paige, C. C. and M. A. Saunders, "LSQR: An Algorithm for Sparse Linear Equations And Sparse Least Squares," *ACM Trans. Math. Soft.*, Vol.8, 1982, pp.43-71.

See Also

See Also

`bicg` | `bicgstab` | `cgs` | `gmres` | `minres` | `norm` | `pcg` | `qmr` | `symmlq`

Topics

"Create Function Handle"

Introduced before R2006a

lt, <

Determine less than

Syntax

```
A < B
lt(A,B)
```

Description

`A < B` returns an array with elements set to logical 1 (`true`) where `A` is less than `B`; otherwise, the element is logical `0` (`false`). The test compares only the real part of numeric arrays. `lt` returns logical `0` (`false`) where `A` or `B` have NaN or undefined categorical elements.

`lt(A,B)` is an alternate way to execute `A < B`, but is rarely used. It enables operator overloading for classes.

Examples

Test Vector Elements

Determine if vector elements are less than a given value.

Create a numeric vector.

```
A = [1 12 18 7 9 11 2 15];
```

Test the vector for elements that are less than `12`.

```
A < 12
```

```
ans = 1×8 logical array
   1   0   0   1   1   1   1   0
```

The result is a vector with values of logical `1` (`true`) where the elements of `A` satisfy the expression.

Use the vector of logical values as an index to view the values in A that are less than 12.

```
A(A < 12)
```

```
ans =

     1     7     9    11     2
```

The result is a subset of the elements in A.

Replace Elements of Matrix

Create a matrix.

```
A = magic(4)
```

```
A =

    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1
```

Replace all values less than 9 with the value 10.

```
A(A < 9) = 10
```

```
A =

    16    10    10    13
    10    11    10    10
     9    10    10    12
    10    14    15    10
```

The result is a new matrix whose smallest element is 9.

Compare Values in Categorical Array

Create an ordinal categorical array.

```
A = categorical({'large' 'medium' 'small'; 'medium' ...
```

```
'small' 'large'},{'small' 'medium' 'large'},'Ordinal',1)
```

```
A = 2×3 categorical array
     large       medium      small
     medium      small       large
```

The array has three categories: `'small'`, `'medium'`, and `'large'`.

Find all values less than the category `'medium'`.

```
A < 'medium'
```

```
ans = 2×3 logical array
   0   0   1
   0   1   0
```

A value of logical `1` (`true`) indicates a value less than the category `'medium'`.

Compare the rows of `A`.

```
A(1,:) < A(2,:)
```

```
ans = 1×3 logical array
   0   0   1
```

The function returns logical `1` (`true`) where the first row has a category value less than the second row.

Test Complex Numbers

Create a vector of complex numbers.

```
A = [1+i 2-2i 1+3i 1-2i 5-i];
```

Find the values that are less than `3`.

```
A(A < 3)
```

```
ans =
   1.0000 + 1.0000i   2.0000 - 2.0000i   1.0000 + 3.0000i   1.0000 - 2.0000i
```

`lt` compares only the real part of the elements in `A`.

Use `abs` to find which elements are within a radius of `3` from the origin.

```
A(abs(A) < 3)
```

```
ans =
   1.0000 + 1.0000i   2.0000 - 2.0000i   1.0000 - 2.0000i
```

The result has one less element. The element `1.0000 + 3.0000i` is not within a radius of `3` from the origin.

Compare Dates

Create a vector of dates.

```
A = datetime([2014,05,01;2014,05,31])
```

```
A = 2×1 datetime array
   01-May-2014
   31-May-2014
```

Find the dates that occur before May 10, 2014.

```
A(A < '2014-05-10')
```

```
ans = datetime
   01-May-2014
```

Input Arguments

A — Left array

scalar | vector | matrix | multidimensional array

Left array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs `A` and `B` must either be the same size or have sizes that are compatible (for example, `A` is an `M`-by-`N` matrix and `B` is a scalar or `1`-by-`N` row vector). For more information, see “Compatible Array Sizes for Basic Operations”.

If `A` and `B` are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is an ordinal categorical array, the other input can be an ordinal categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have the same sets of categories, including their order. See "Compare Categorical Array Elements" for more details.
- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.
- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

B — Right array

scalar | vector | matrix | multidimensional array

Right array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is an ordinal categorical array, the other input can be an ordinal categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have the same sets of categories, including their order. See "Compare Categorical Array Elements" for more details.
- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.
- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.

- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also
`eq` | `ge` | `gt` | `le` | `ne`

Topics
“Array Comparison with Relational Operators”
“Ordinal Categorical Arrays”
“MATLAB Operators and Special Characters”

Introduced before R2006a

lu

LU matrix factorization

Syntax

```
Y = lu(A)
[L,U] = lu(A)
[L,U,P] = lu(A)
[L,U,P,Q] = lu(A)
[L,U,P,Q,R] = lu(A)
[...] = lu(A,'vector')
[...] = lu(A,thresh)
[...] = lu(A,thresh,'vector')
```

Description

The `lu` function expresses a matrix `A` as the product of two essentially triangular matrices, one of them a permutation of a lower triangular matrix and the other an upper triangular matrix. The factorization is often called the *LU*, or sometimes the *LR*, factorization. `A` can be rectangular.

`Y = lu(A)` returns matrix `Y` that contains the strictly lower triangular `L`, i.e., without its unit diagonal, and the upper triangular `U` as submatrices. That is, if `[L,U,P] = lu(A)`, then `Y = U+L-eye(size(A))`. The permutation matrix `P` is not returned.

`[L,U] = lu(A)` returns an upper triangular matrix in `U` and a permuted lower triangular matrix in `L` such that `A = L*U`. Return value `L` is a product of lower triangular and permutation matrices.

`[L,U,P] = lu(A)` returns an upper triangular matrix in `U`, a lower triangular matrix `L` with a unit diagonal, and a permutation matrix `P`, such that `L*U = P*A`. The statement `lu(A,'matrix')` returns identical output values.

`[L,U,P,Q] = lu(A)` for sparse nonempty `A`, returns a unit lower triangular matrix `L`, an upper triangular matrix `U`, a row permutation matrix `P`, and a column reordering

matrix Q, so that P*A*Q = L*U. If A is empty or not sparse, lu displays an error message. The statement lu(A,'matrix') returns identical output values.

[L,U,P,Q,R] = lu(A) returns unit lower triangular matrix L, upper triangular matrix U, permutation matrices P and Q, and a diagonal scaling matrix R so that P*(R\A)*Q = L*U for sparse non-empty A. Typically, but not always, the row-scaling leads to a sparser and more stable factorization. The statement lu(A,'matrix') returns identical output values.

[...] = lu(A,'vector') returns the permutation information in two row vectors p and q. You can specify from 1 to 5 outputs. Output p is defined as A(p,:)=L*U, output q is defined as A(p,q)=L*U, and output R is defined as R(:,p)\A(:,q)=L*U.

[...] = lu(A,thresh) controls pivoting. This syntax applies to sparse matrices only. The thresh input is a one- or two-element vector of type single or double that defaults to [0.1, 0.001]. If A is a square matrix with a mostly symmetric structure and mostly nonzero diagonal, MATLAB uses a symmetric pivoting strategy. For this strategy, the diagonal where

```
A(i,j) >= thresh(2) * max(abs(A(j:m,j)))
```

is selected. If the diagonal entry fails this test, a pivot entry below the diagonal is selected, using thresh(1). In this case, L has entries with absolute value 1/min(thresh) or less.

If A is not as described above, MATLAB uses an asymmetric strategy. In this case, the sparsest row i where

```
A(i,j) >= thresh(1) * max(abs(A(j:m,j)))
```

is selected. A value of 1.0 results in conventional partial pivoting. Entries in L have an absolute value of 1/thresh(1) or less. The second element of the thresh input vector is not used when MATLAB uses an asymmetric strategy.

Smaller values of thresh(1) and thresh(2) tend to lead to sparser LU factors, but the solution can become inaccurate. Larger values can lead to a more accurate solution (but not always), and usually an increase in the total work and memory usage. The statement lu(A,thresh,'matrix') returns identical output values.

[...] = lu(A,thresh,'vector') controls the pivoting strategy and also returns the permutation information in row vectors, as described above. The thresh input must precede 'vector' in the input argument list.

Note In rare instances, incorrect factorization results in `P*A*Q` ≠ `L*U`. Increase `thresh`, to a maximum of `1.0` (regular partial pivoting), and try again.

Arguments

`A`	Rectangular matrix to be factored.
`thresh`	Pivot threshold for sparse matrices. Valid values are in the interval `[0,1]`. If you specify the fourth output `Q`, the default is `0.1`. Otherwise, the default is `1.0`.
`L`	Factor of `A`. Depending on the form of the function, `L` is either a unit lower triangular matrix, or else the product of a unit lower triangular matrix with `P'`.
`U`	Upper triangular matrix that is a factor of `A`.
`P`	Row permutation matrix satisfying the equation `L*U = P*A`, or `L*U = P*A*Q`. Used for numerical stability.
`Q`	Column permutation matrix satisfying the equation `P*A*Q = L*U`. Used to reduce fill-in in the sparse case.
`R`	Row-scaling matrix

Examples

Example 1

Start with

```
A = [ 1     2     3
      4     5     6
      7     8     0 ];
```

To see the LU factorization, call `lu` with two output arguments.

```
[L1,U] = lu(A)

L1 =
    0.1429    1.0000         0
```

```
    0.5714    0.5000    1.0000
    1.0000         0         0

U =
    7.0000    8.0000         0
         0    0.8571    3.0000
         0         0    4.5000
```

Notice that `L1` is a permutation of a lower triangular matrix: if you switch rows 2 and 3, and then switch rows 1 and 2, the resulting matrix is lower triangular and has `1`s on the diagonal. Notice also that `U` is upper triangular. To check that the factorization does its job, compute the product

```
L1*U
```

which returns the original `A`. The inverse of the example matrix, `X = inv(A)`, is actually computed from the inverses of the triangular factors

```
X = inv(U)*inv(L1)
```

Using three arguments on the left side to get the permutation matrix as well,

```
[L2,U,P] = lu(A)
```

returns a truly lower triangular `L2`, the same value of `U`, and the permutation matrix `P`.

```
L2 =

    1.0000         0         0
    0.1429    1.0000         0
    0.5714    0.5000    1.0000

U =
    7.0000    8.0000         0
         0    0.8571    3.0000
         0         0    4.5000

P =
    0    0    1
    1    0    0
    0    1    0
```

Note that `L2 = P*L1`.

```
P*L1
```

```
ans =

    1.0000         0         0
    0.1429    1.0000         0
    0.5714    0.5000    1.0000
```

To verify that `L2*U` is a permuted version of `A`, compute `L2*U` and subtract it from `P*A`:

```
P*A - L2*U

ans =
     0     0     0
     0     0     0
     0     0     0
```

In this case, `inv(U)*inv(L)` results in the permutation of `inv(A)` given by `inv(P)*inv(A)`.

The determinant of the example matrix is

```
d = det(A)

d =    27
```

It is computed from the determinants of the triangular factors

```
d = det(L)*det(U)
```

The solution to $Ax = b$ is obtained with matrix division

```
x = A\b
```

The solution is actually computed by solving two triangular systems

```
y = L\b
x = U\y
```

Example 2

The 1-norm of their difference is within roundoff error, indicating that `L*U = P*B*Q`.

Generate a 60-by-60 sparse adjacency matrix of the connectivity graph of the Buckminster-Fuller geodesic dome.

```
B = bucky;
```

Use the sparse matrix syntax with four outputs to get the row and column permutation matrices.

```
[L,U,P,Q] = lu(B);
```

Apply the permutation matrices to B, and subtract the product of the lower and upper triangular matrices.

```
Z = P*B*Q - L*U;
norm(Z,1)

ans =
  7.9936e-015
```

Example 3

This example illustrates the benefits of using the `'vector'` option. Note how much memory is saved by using the `lu(F,'vector')` syntax.

```
F = gallery('uniformdata',[1000 1000],0);
g = sum(F,2);
[L,U,P] = lu(F);
[L,U,p] = lu(F,'vector');
whos P p

Name          Size           Bytes  Class      Attributes
P          1000x1000       8000000  double
p             1x1000          8000  double
```

The following two statements are equivalent. The first typically requires less time:

```
x = U\(L\(g(p,:)));
y = U\(L\(P*g));
```

Tips

Most of the algorithms for computing LU factorization are variants of Gaussian elimination. The factorization is a key step in obtaining the inverse with `inv` and the determinant with `det`. It is also the basis for the linear equation solution or matrix division obtained with `\` and `/`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`cond` | `det` | `inv` | `ilu` | `qr` | `rref`

Introduced before R2006a

Primitive Line Properties

Control primitive line appearance and behavior

Description

Primitive line properties control the appearance and behavior of a primitive line object. By changing property values, you can modify certain aspects of the line.

Starting in R2014b, you can use dot notation to query and set properties.

```
h = line;
s = h.LineStyle;
h.LineStyle = ':';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Line

`LineStyle` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`Color` — Line color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you specify the color as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`LineJoin` — Style of line corners

`'round'` (default) | `'miter'` | `'chamfer'`

Style of line corners, specified as `'round'`, `'miter'`, or `'chamfer'`. This table illustrates the appearance of the different values.

'round'	'miter'	'chamfer'

The appearance of the `'round'` option might look different if the `Renderer` property of the figure is set to `'opengl'` instead of `'painters'`.

`AlignVertexCenters` — Sharp vertical and horizontal lines

`'off'` (default) | `'on'`

Sharp vertical and horizontal lines, specified as `'off'` or `'on'`.

If the associated figure has a GraphicsSmoothing property set to `'on'` and a Renderer property set to `'opengl'`, then the figure applies a smoothing technique to plots. In some cases, this smoothing technique can cause vertical and horizontal lines to appear uneven in thickness or color. Use the `AlignVertexCenters` property to eliminate the uneven appearance.

- `'off'` — Do not sharpen vertical or horizontal lines. The lines might appear uneven in thickness or color.
- `'on'` — Sharpen vertical and horizontal lines to eliminate an uneven appearance.

Note: You must have a graphics card that supports this feature. To see if the feature is supported, type `opengl info`. If it is supported, then the returned fields contain the line `SupportsAlignVertexCenters: 1`.

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'*'` | `...`

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerIndices` — Indices of data points at which to display markers

`1:length(YData)` (default) | vector of positive integers | scalar positive integer

Indices of data points at which to display markers, specified as a vector of positive integers. If you do not specify the indices, then MATLAB displays a marker at every data point.

Note: To see the markers, you must also specify a marker symbol.

Example: `plot(x,y,'-o','MarkerIndices',[1 5 10])` displays a circle marker at the first, fifth, and tenth data points.

Example: `plot(x,y,'-x','MarkerIndices',1:3:length(y))` displays a cross marker every three data points.

Example: `plot(x,y,'Marker','square','MarkerIndices',5)` displays one square marker at the fifth data point.

`MarkerSize` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`MarkerFaceColor` — Marker fill color

`'none'` (default) | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which makes the interior invisible.
- `'auto'` — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Data

`XData` — x values

`[0 1]` (default) | vector

x values, specified as a vector. `XData` and `YData` must have equal lengths.

Example: `1:10`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`YData` — y values

`[0 1]` (default) | vector

y values, specified as a vector. `XData` and `YData` must have equal lengths.

Example: `1:10`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ZData` — z values

empty matrix (default) | vector

z values, specified as a vector. `ZData` must have the same length as `XData` and `YData`.

Example: `1:10`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

EraseMode — (removed) Technique to draw and erase objects

'normal' (default) | 'none' | 'xor' | 'background'

Note: EraseMode has been removed. You can delete code that accesses the EraseMode property with minimal impact. If you were using EraseMode to create line animations, use the animatedline function instead.

Technique to draw and erase objects, specified as one of these values:

- 'normal' — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- 'none' — Do not erase the object when it is moved or destroyed. After you erase the object with EraseMode,'none', it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- 'xor' — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- 'background' — Erase the object by redrawing it in the axes background color, or the figure background color if the axes Color property is 'none'. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the EraseMode property of all objects is set to 'normal'. This means graphics objects created with EraseMode set to 'none', 'xor', or 'background' can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the getframe command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

Type — Type of graphics object

'line'

This property is read-only.

Type of graphics object, returned as `'line'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — Tag to associate with primitive line

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see “Callback Definition”.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Primitive Line` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `Primitive Line` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `Primitive Line` object that has no color. The `HitTest` property determines if the `Primitive Line` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Primitive Line` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Primitive Line` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Primitive Line` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Primitive Line` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Primitive Line` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Primitive Line` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see “Callback Definition”.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`line`

Topics

"Access Property Values"
"Graphics Object Properties"

magic

Magic square

Syntax

```
M = magic(n)
```

Description

`M = magic(n)` returns an `n`-by-`n` matrix constructed from the integers `1` through `n^2` with equal row and column sums. The order n must be a scalar greater than or equal to `3`.

Examples

Third-Order Magic Square

Compute the third-order magic square, `M`.

```
M = magic(3)
```

```
M =

     8     1     6
     3     5     7
     4     9     2
```

The sum of the elements in each column and the sum of the elements in each row are the same.

```
sum(M)
```

```
ans =

    15    15    15
```

```
sum(M,2)
```

```
ans =

    15
    15
    15
```

Limitations

If you supply `n` less than `3`, `magic` returns either a nonmagic square, or else the degenerate magic squares `1` and `[]`.

Tips

A magic square, scaled by its magic sum, is doubly stochastic.

Algorithms

There are three different algorithms:

- `n` odd
- `n` even but not divisible by four
- `n` divisible by four

To make this apparent, type

```
for n = 3:20
    A = magic(n);
    r(n) = rank(A);
end
```

For `n` odd, the rank of the magic square is `n`. For `n` divisible by 4, the rank is `3`. For `n` even but not divisible by 4, the rank is `n/2 + 2`.

```
[(3:20)',r(3:20)']
ans =
     3     3
     4     3
     5     5
     6     5
     7     7
     8     3
     9     9
    10     7
    11    11
    12     3
    13    13
    14     9
    15    15
    16     3
    17    17
    18    11
    19    19
    20     3
```

Plotting A for n = 18, 19, 20 shows the characteristic plot for each category.







Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

`ones` | `rand`

Introduced before R2006a

makehgtform

Create 4-by-4 transform matrix

Syntax

```
M = makehgtform
M = makehgtform('translate',[tx ty tz])
M = makehgtform('scale',s)
M = makehgtform('scale',[sx,sy,sz])
M = makehgtform('xrotate',t)
M = makehgtform('yrotate',t)
M = makehgtform('zrotate',t)
M = makehgtform('axisrotate',[ax,ay,az],t)
```

Description

Use `makehgtform` to create transform matrices for translation, scaling, and rotation of graphics objects. Apply the transform to graphics objects by assigning the transform to the `Matrix` property of a parent transform object.

`M = makehgtform` returns an identity transform.

`M = makehgtform('translate',[tx ty tz])` or M = makehgtform('translate',tx,ty,tz) returns a transform that translates along the *x*-axis by `tx`, along the *y*-axis by `ty`, and along the *z*-axis by `tz`.

`M = makehgtform('scale',s)` returns a transform that scales uniformly along the *x*-, *y*-, and *z*-axes.

`M = makehgtform('scale',[sx,sy,sz])` returns a transform that scales along the *x*-axis by `sx`, along the *y*-axis by `sy`, and along the *z*-axis by `sz`.

`M = makehgtform('xrotate',t)` returns a transform that rotates around the *x*-axis by `t` radians.

`M = makehgtform('yrotate',t)` returns a transform that rotates around the *y*-axis by `t` radians.

`M = makehgtform('zrotate',t)` returns a transform that rotates around the *z*-axis by `t` radians.

`M = makehgtform('axisrotate',[ax,ay,az],t)` Rotate around axis `[ax ay az]` by `t` radians.

Note that you can specify multiple operations in one call to `makehgtform` and the MATLAB software returns a transform matrix that is the result of concatenating all specified operations. For example,

```
m = makehgtform('xrotate',pi/2,'yrotate',pi/2);
```

is the same as

```
mx = makehgtform('xrotate',pi/2);
my = makehgtform('yrotate',pi/2);
m = mx*my;
```

See Also

`hggroup` | `hgtransform`

Topics

"Create Object Groups"

Introduced before R2006a

mapreduce

Programming technique for analyzing data sets that do not fit in memory

Syntax

```
outds = mapreduce(ds,mapfun,reducefun)
outds = mapreduce(ds,mapfun,reducefun,mr)
outds = mapreduce( ___ ,Name,Value)
```

Description

`outds = mapreduce(ds,mapfun,reducefun)` applies map function `mapfun` to input datastore `ds`, and then passes the values associated with each unique key to reduce function `reducefun`. The output datastore is a `KeyValueDatastore` object that points to `.mat` files in the current folder.

`outds = mapreduce(ds,mapfun,reducefun,mr)` optionally specifies the run-time configuration settings for `mapreduce`. The `mr` input is the result of a call to the `mapreducer` function. Typically, this argument is used with Parallel Computing Toolbox, MATLAB Distributed Computing Server, or MATLAB Compiler. For more information, see "Speed Up and Deploy MapReduce Using Other Products".

`outds = mapreduce( ___ ,Name,Value)` specifies additional options with one or more `Name,Value` pair arguments using any of the previous syntaxes. For example, you can specify `'OutputFolder'` followed by a character vector specifying a path to the output folder.

Examples

Count Flights by Airline

Use `mapreduce` to count the number of flights made by each unique airline carrier in a data set.

Create a datastore using the `airlinesmall.csv` data set. This 12-megabyte data set contains 29 columns of flight information for several airline carriers, including

arrival and departure times. In this example, select `UniqueCarrier` (airline name) as the variable of interest. Specify the `'TreatAsMissing'` name-value pair so that the datastore treats `'NA'` values as missing and replaces them with `NaN` values.

```
ds = tabularTextDatastore('airlinesmall.csv', 'TreatAsMissing', 'NA');
ds.SelectedVariableNames = 'UniqueCarrier';
ds.SelectedFormats = '%C';
```

Preview the data.

```
preview(ds)
```

```
ans = 8×1 table
    UniqueCarrier
    _____________

    PS
    PS
    PS
    PS
    PS
    PS
    PS
    PS
```

Run `mapreduce` on the data. The map and reduce functions count the number of instances of each airline carrier name in each chunk of data, then combine those intermediate counts into a final count. This method leverages the intermediate sorting by unique key performed by `mapreduce`. The functions `countMapper` and `countReducer` are included at the end of this script.

```
outds = mapreduce(ds, @countMapper, @countReducer);
```

```
********************************
*      MAPREDUCE PROGRESS      *
********************************
Map   0% Reduce   0%

Map  16% Reduce   0%

Map  32% Reduce   0%

Map  48% Reduce   0%

Map  65% Reduce   0%
```

```
Map  81% Reduce   0%

Map  97% Reduce   0%

Map 100% Reduce   0%

Map 100% Reduce  10%

Map 100% Reduce  21%

Map 100% Reduce  31%

Map 100% Reduce  41%

Map 100% Reduce  52%

Map 100% Reduce  62%

Map 100% Reduce  72%

Map 100% Reduce  83%

Map 100% Reduce  93%

Map 100% Reduce 100%
```

```
readall(outds)
```

```
ans = 29×2 table
      Key         Value
    ________    _______

    'AA'        [14930]
    'AS'        [ 2910]
    'CO'        [ 8138]
    'DL'        [16578]
    'EA'        [  920]
    'HP'        [ 3660]
    'ML (1)'    [   69]
    'NW'        [10349]
    'PA (1)'    [  318]
    'PI'        [  871]
    'PS'        [   83]
    'TW'        [ 3805]
    'UA'        [13286]
    'US'        [13997]
    'WN'        [15931]
    'AQ'        [  154]
```

```
    'MQ'        [ 3962]
    'B6'        [  806]
    'DH'        [  696]
    'EV'        [ 1699]
    'F9'        [  335]
    'FL'        [ 1263]
    'HA'        [  273]
    'OH'        [ 1457]
    'OO'        [ 3090]
    'TZ'        [  216]
    'XE'        [ 2357]
    '9E'        [  521]
    'YV'        [  849]
```

The map function `countMapper` leverages the fact that the data is categorical. The `countcats` and `categories` functions are used on each chunk of the input data to generate key/value pairs of the airline name and associated count.

```
function countMapper(data, info, intermKV)
% Counts unique airline carrier names in each chunk.
a = data.UniqueCarrier;
c = num2cell(countcats(a));
keys = categories(a);
addmulti(intermKV, keys, c)
end
```

The reduce function `countReducer` reads in the intermediate data produced by the map function and adds together all of the counts to produce a single final count for each airline carrier.

```
function countReducer(key, intermValIter, outKV)
% Combines counts from all chunks to produce final counts.
count = 0;
while hasnext(intermValIter)
    data = getnext(intermValIter);
    count = count + data;
end
add(outKV, key, count)
end
```

- “Compute Mean Value with MapReduce”
- “Compute Summary Statistics by Group Using MapReduce”

- "Using MapReduce to Fit a Logistic Regression Model"

Input Arguments

ds — Input datastore

datastore object

Input datastore, specified as a datastore object. Use the `datastore` function to create a datastore object from your data set.

mapfun — Function handle to map function

function handle

Function handle to map function. `mapfun` receives chunks from input datastore `ds`, and then uses the `add` and `addmulti` functions to add key-value pairs to an intermediate `KeyValueStore` object. The number of calls to the map function by `mapreduce` is equal to the number of chunks in the `datastore` (the number of chunks is determined by the `ReadSize` property of the datastore).

The inputs to the map function are `data`, `info`, and `intermKVStore`, which `mapreduce` automatically creates and passes to the map function:

- The `data` and `info` inputs are the result of a call to the `read` function of `datastore`, which `mapreduce` executes automatically before each call to the map function.
- `intermKVStore` is the name of the intermediate `KeyValueStore` object to which the map function needs to add key-value pairs. If none of the calls to the map function add key-value pairs to `intermKVStore`, then `mapreduce` does not call the reduce function and the output datastore is empty.

An example of a template for the map function is

```
function myMapper(data, info, intermKVStore)
%do a calculation with the data chunk
add(intermKVStore, key, value)
end
```

Example: `@myMapper`

Data Types: `function_handle`

reducefun — Function handle to reduce function

function handle

Function handle to reduce function. `mapreduce` calls `reducefun` once for each unique key added to the intermediate `KeyValueStore` by the map function. In each call, `mapreduce` passes the values associated with the active key to `reducefun` as a `ValueIterator` object. The `reducefun` function loops through the values for each key using the `hasnext` and `getnext` functions. Then, after performing some calculation(s), it writes key-value pairs to the final output.

The inputs to the reduce function are `intermKey`, `intermValIter`, and `outKVStore`, which `mapreduce` automatically creates and passes to the reduce function:

- `intermKey` is the active key from the intermediate `KeyValueStore` object. Each call to the reduce function by `mapreduce` specifies a new unique key from the keys in the intermediate `KeyValueStore` object.
- `intermValIter` is the `ValueIterator` associated with the active key, `intermKey`. This `ValueIterator` object contains all of the values associated with the active key. Scroll through the values using the `hasnext` and `getnext` functions.
- `outKVStore` is the name for the final `KeyValueStore` object to which the reduce function needs to add key-value pairs. `mapreduce` takes the output key-value pairs from `outKVStore` and returns them in the output datastore, `outds`, which is a `KeyValueDatastore` object by default. If none of the calls to the reduce function add final key-value pairs to `outKVStore`, then the output datastore is empty.

An example of a template for the reduce function is

```
function myReducer(intermKey, intermValIter, outKVStore)
while hasnext(intermValIter)
    X = getnext(intermValIter);
    %do a calculation with the current value, X
end
add(outKVStore, key, value)
end
```

Example: `@myReducer`

Data Types: `function_handle`

`mr` — Execution environment

MapReducer object

Execution environment, specified as a MapReducer object. `mr` is the result of a call to the `mapreducer` function. The default `mr` argument is a call to `gcmr`, which uses the default global execution environment for `mapreduce` (in MATLAB the default is `mapreducer(0)`, which returns a `SerialMapReducer` object).

Note: This setting specifies the execution environment for `mapreduce` and is not necessary to run `mapreduce` on your local computer. For more information, see "Speed Up and Deploy MapReduce Using Other Products".

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `outds = mapreduce(ds, @mapfun, @reducefun, 'Display', 'off', 'OutputFolder', 'C:\Users\username\Desktop')`

`'OutputType'` — Type of datastore output

`'Binary'` (default) | `'TabularText'`

Type of datastore output, specified as `'Binary'` or `'TabularText'`. The default setting of `'Binary'` returns a `KeyValueDatastore` output datastore that points to binary (`.mat` or `.seq`) files in the output folder. The `'TabularText'` option returns a `TabularTextDatastore` output datastore that points to `.txt` files in the output folder.

The table provides the details for each of the output types.

`'OutputType'`	Type of datastore output	Datastore points to files of type	Values that the Reduce function can add	Keys that the Reduce function can add	Details
`'Binary'` (default)	`KeyValueData`	`.mat` (or `.seq` when running against Hadoop).	Any valid MATLAB object.	Character vectors, or numeric scalars that are not `NaN`, complex, logical, or sparse.	N/A
`'TabularTex`	`TabularTextD`	`.txt`	Character vectors, or numeric	Character vectors, or numeric	• File is UTF-8 encoded.

'OutputType'	Type of datastore output	Datastore points to files of type	Values that the Reduce function can add	Keys that the Reduce function can add	Details
			scalars that are not NaN, complex, logical, or sparse.	scalars that are not NaN, complex, logical, or sparse.	• Keys and values are tab (\t) separated. • The row delimiter is \r\n on Windows, and \n on Linux and Mac.

'OutputFolder' — Destination folder of mapreduce output
pwd (default) | file path

Destination folder for mapreduce output, specified as a file path. The default output folder is the current folder, pwd. You can specify a different path with a fully qualified path or with a path relative to the current folder.

Example: mapreduce(..., 'OutputFolder', 'MyOutputFolder\Results') specifies a file path relative to the current folder for the output.

'Display' — Toggle for command line progress output
'on' (default) | 'off'

Toggle for command line progress output, specified as 'on' or 'off'. The default is 'on', so that mapreduce displays progress information in the command window during the map and reduce phases of execution.

Output Arguments

outds — Output datastore
KeyValueDatastore (default) | TabularTextDatastore

Output datastore, returned as a KeyValueDatastore or TabularTextDatastore object. By default, outds is a KeyValueDatastore object that points to .mat files

in the current folder. Use the `Name,Value` pair arguments for `'OutputType'` and `'OutputFolder'` to return a `TabularTextDatastore` object or change the location of the output files, respectively.

`mapreduce` does not sort the key-value pairs in `outds`. Their order may differ when using other products with `mapreduce`.

To view the contents of `outds`, use the `preview`, `read`, or `readall` functions of `datastore`.

Tips

- Debugging your `mapreduce` algorithms to examine how key-value pairs move through the different phases is always useful. To examine the movement of data, set breakpoints in your map and reduce functions. The breakpoints stop execution of `mapreduce`, allowing you to examine the current status of relevant variables, like the `KeyValueStore` or `ValueIterator`. For more information, see "Debug MapReduce Algorithms".
- Some recommendations to optimize `mapreduce` performance on any platform are:
  - Minimize the number of calls to the map function. The easiest approach is to increase the value of the `ReadSize` property of the input datastore. The result is that `mapreduce` passes larger chunks of data to the map function, and the datastore depletes with fewer reads.
  - Decrease the amount of intermediate data sent between map and reduce functions. One approach is to use `unique` inside a map function to combine similar keys. See "Compute Mean by Group Using MapReduce" for an example of this technique.

See Also

See Also

`datastore` | `gcmr` | KeyValueStore | `mapreducer` | `tall` | ValueIterator

Topics

"Compute Mean Value with MapReduce"
"Compute Summary Statistics by Group Using MapReduce"

"Using MapReduce to Fit a Logistic Regression Model"
"Getting Started with MapReduce"
"Speed Up and Deploy MapReduce Using Other Products"
"Build Effective Algorithms with MapReduce"

Introduced in R2014b

mapreducer

Define execution environment for mapreduce or tall arrays

Syntax

```
mapreducer
mapreducer(0)
mapreducer(mr)
mr = mapreducer( ___ )
mr = mapreducer( ___ ,'ObjectVisibility','Off')
```

Description

`mapreducer`, with no arguments, sets the global execution environment to be the default (`SerialMapReducer` in MATLAB).

`mapreducer` is a configuration function that changes how MATLAB executes `mapreduce` algorithms and tall array calculations. Use this function to set, change, or store the execution environment to leverage Parallel Computing Toolbox, MATLAB Distributed Computing Server, or MATLAB Compiler.

Note: In MATLAB, `mapreduce` algorithms and tall array calculations automatically run using a `SerialMapReducer`, and it is unnecessary to specify configuration settings using `mapreducer` to use these features. However, if you have Parallel Computing Toolbox, MATLAB Distributed Computing Server, or MATLAB Compiler, then additional `mapreducer` configuration options are available for running in parallel or deployed environments.

For more information, see `mapreducer` in the Parallel Computing Toolbox documentation, or `mapreducer` in the MATLAB Compiler documentation.

`mapreducer(0)` sets the global execution environment to be the local MATLAB session.

`mapreducer(mr)` sets the global execution environment using a previously created MapReducer object, `mr`.

`mr = mapreducer( ___ )` also returns a MapReducer object using any of the previous syntaxes. You can use `mr` as a fourth input argument to `mapreduce` when you want to explicitly specify the execution environment.

`mr = mapreducer( ___ ,'ObjectVisibility','Off')` toggles the visibility of MapReducer object `mr`. Use this syntax to create new MapReducer objects without affecting the global execution environment.

Output Arguments

`mr` — Execution environment
MapReducer object

Execution environment, returned as a MapReducer object.

If the `ObjectVisibility` property of `mr` is set to `'On'` (the default), then `mr` defines the execution environment for all `mapreduce` algorithms and tall array calculations. You can optionally pass `mr` to the `mapreduce` function to explicitly specify the execution environment, even if its `ObjectVisibility` property is set to `'Off'`.

Tips

- When working with tall arrays, use `mapreducer` to set the execution environment prior to creating the tall array with `tall(ds)`. Tall arrays are bound to the current global execution environment when they are constructed. If the global execution environment is subsequently changed, then the tall array becomes invalid and must be reconstructed.

See Also

See Also
`gcmr` | `mapreduce` | `tall`

Topics
"Speed Up and Deploy MapReduce Using Other Products"

"Extend Tall Arrays with Other Products"

Introduced in R2014b

containers.Map class

Package: containers

Map values to unique keys

Description

A `Map` object is a data structure that allows you to retrieve values using a corresponding key. Keys can be real numbers or character vectors and provide more flexibility for data access than array indices, which must be positive integers. Values can be scalar or nonscalar arrays.

Construction

`mapObj = containers.Map` constructs an empty `Map` container `mapObj`.

`mapObj = containers.Map(keySet,valueSet)` constructs a `Map` that contains one or more values and a unique key for each value.

`mapObj = containers.Map(keySet,valueSet,'UniformValues',isUniform)` specifies whether all values must be uniform (either all scalars of the same data type, or all character vectors). Possible values for `isUniform` are logical `true` (`1`) or `false` (`0`).

`mapObj = containers.Map('KeyType',kType,'ValueType',vType)` constructs an empty `Map` object and sets the `KeyType` and `ValueType` properties. The order of the key type and value type argument pairs is not important, but both pairs are required.

Input Arguments

`keySet`

1-by-`n` array that specifies `n` unique keys for the map.

All keys in a `Map` object are real numeric values or all keys are character vectors. If `n` > 1 and the keys are character vectors, `keySet` must be a cell array. The number of keys in `keySet` must equal the number of values in `valueSet`.

valueSet

1-by-n array of any class that specifies n values for the map. The number of values in valueSet must equal the number of keys in keySet.

'UniformValues'

Parameter character vector to use with the isUniform argument.

isUniform

Logical value that specifies whether all values are uniform. If isUniform is true (1), all values must be scalars of the same data type, or all values must be character vectors. If isUniform is false (0), then containers.Map sets the ValueType to 'any'.

Default: true for empty Map objects, otherwise determined by the data types of values in valueSet.

'KeyType'

Parameter character vector to use with the kType argument.

kType

Character vector that specifies the data type for the keys. Possible values are 'char', 'double', 'single', 'int32', 'uint32', 'int64', or 'uint64'.

Default: 'char' for empty Map objects, otherwise determined by the data types of keys in keySet. If you specify keys of different numeric types, kType is 'double'.

'ValueType'

Literal character vector parameter to use with the vType argument.

vType

Character vector that specifies the data type for the values. Possible values are 'any', 'char', 'logical', 'double', 'single', 'int8', 'uint8', 'int16', 'uint16', 'int32', 'uint32', 'int64', or 'uint64'.

Default: 'any' when you create an empty Map object or when you specify values of different sizes or types, otherwise determined by the data type of valueSet.

Properties

`Count`

Unsigned 64-bit integer that represents the total number of key-value pairs contained in the `Map` object. Read only.

`KeyType`

Character array that indicates the data type of all keys in the `Map` object. The default `KeyType` for empty `Map` objects is `'char'`. Otherwise, `KeyType` is determined from the data type of the `keySet` inputs. Read only.

`ValueType`

Character array that indicates the data type of all values in the `Map` object. If you construct an empty `Map` object or specify values with different data types, then the value of `ValueType` is `'any'`. Otherwise, `ValueType` is determined from the data type of the `valueSet` inputs. Read only.

Methods

isKey	Determine if `containers.Map` object contains key
keys	Identify keys of `containers.Map` object
length	Length of `containers.Map` object
remove	Remove key-value pairs from `containers.Map` object
size	Size of `containers.Map` object
values	Identify values in `containers.Map` object

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Construct a Map and View Properties

Construct a `Map` object that contains rainfall data for several months:

```
keySet =   {'Jan', 'Feb', 'Mar', 'Apr'};
valueSet = [327.2, 368.2, 197.6, 178.4];
mapObj = containers.Map(keySet,valueSet)
```

This code returns a description of the map, including the property values:

```
mapObj =

  Map with properties:

        Count: 4
      KeyType: char
    ValueType: double
```

Get a specific property using dot notation, such as

```
mapObj.Count
```

which returns

```
ans =

                     4
```

Look Up Values in a Map

Use the map created in the previous example to find the rainfall data for February:

```
rainFeb = mapObj('Feb')
```

This code returns

```
rainFeb =

  368.2000
```

Add a Single Value and Key to a Map

Add data for the month of May to the map created in the first example:

```
mapObj('May') = 100.0;
```

Add Multiple Values and Keys by Concatenating Maps

Create a map that contains rainfall data for June, July, and August, and add the data to `mapObj` (from previous examples):

```
keySet   = {'Jun','Jul','Aug'};
valueSet = [ 69.9, 32.3, 37.3];
newMap = containers.Map(keySet,valueSet);

mapObj = [mapObj; newMap];
```

Map objects only support vertical concatenation (that is, adding columns with a semicolon, `;`). When concatenating maps, the data type of all values must be consistent with the `ValueType` of the leftmost map. In this example, both maps have the a `ValueType` of `double`.

Get the Keys or Values in a Map

Determine all the keys of `mapObj` (from previous examples) by calling the `keys` method:

```
allKeys = keys(mapObj)
```

This method returns the keys in alphabetical order:

```
allKeys =

    'Apr'    'Aug'    'Feb'    'Jan'    'Jul'    'Jun'    'Mar'    'May'
```

Get multiple values from the map by calling the `values` method. Like the `keys` method, you can request all values with the syntax `values(mapObj)`. Alternatively, request values for specific keys. For example, view the values for March, April, and May in `mapObj`:

```
springValues = values(mapObj,{'Mar','Apr','May'})
```

This method returns the values in a cell array, in the order corresponding to the specified keys:

```
springValues =

    [197.6000]    [178.4000]    [100]
```

Remove Keys and Values

Remove the data for March and April from `mapObj` (from previous examples) by calling the `remove` method, and view the remaining keys:

```
remove(mapObj,{'Mar','Apr'});
keys(mapObj)
```

This code returns

```
ans =

    'Aug'    'Feb'    'Jan'    'Jul'    'Jun'    'May'
```

Create a Map with Nonscalar Values

Map integer keys to nonscalar arrays, and view the value for one of the keys:

```
keySet = [5,10,15];
valueSet = {magic(5),magic(10),magic(15)};
mapObj = containers.Map(keySet,valueSet);
mapObj(5)
```

This code returns

```
ans =

    17    24     1     8    15
    23     5     7    14    16
     4     6    13    20    22
    10    12    19    21     3
    11    18    25     2     9
```

Construct an Empty Map

Construct a map with no values, but set the `KeyType` and `ValueType` properties:

```
mapObj = containers.Map('KeyType','char','ValueType','int32')
```

This code returns

```
mapObj =

  Map with properties:

        Count: 0
      KeyType: char
    ValueType: int32
```

Specify Whether Values Are Uniform

Construct a map with numeric values, and specify that the values do not have to be uniform:

```
keySet = {'a','b','c'};
valueSet = {1,2,3};
mapObj = containers.Map(keySet,valueSet,'UniformValues',false);
```

This map allows nonnumeric values, so

```
mapObj('d') = 'OK';
values(mapObj)
```

returns

```
ans =

    [1]    [2]    [3]    'OK'
```

See Also

isKey | values | keys

mat2cell

Convert array to cell array with potentially different sized cells

Syntax

```
C = mat2cell(A,dim1Dist,...,dimNDist)
C = mat2cell(A,rowDist)
```

Description

`C = mat2cell(A,dim1Dist,...,dimNDist)` divides array `A` into smaller arrays within cell array `C`. Vectors `dim1Dist,...dimNDist` specify how to divide the rows, columns, and (when applicable) higher dimensions of `A`.

`C = mat2cell(A,rowDist)` divides array `A` into an `n`-by-1 cell array `C`, where `n == numel(rowDist)`.

Input Arguments

`A`

Any type of array.

`dim1Dist,...,dimNDist`

Numeric vectors that describe how to divide each dimension of `A`. For example, this command

```
c = mat2cell(x, [10, 20, 30], [25, 25])
```

divides a 60-by-50 array into six arrays contained in a cell array.

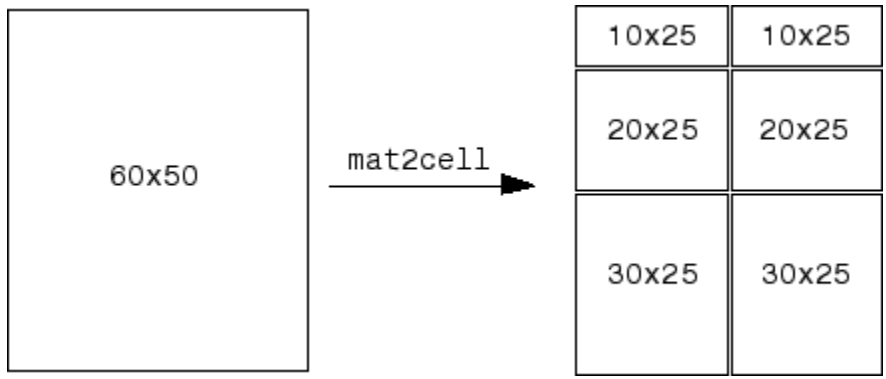

For the *k*th dimension, `sum(dim*k*Dist) == size(A, *k*)`.

If the *k*th dimension of `A` is zero, set the corresponding `dim*k*Dist` to the empty array, `[]`. For example,

```
a = rand(3, 0, 4);
c = mat2cell(a, [1, 2], [], [2, 1, 1]);
```

`rowDist`

Numeric vector that describes how to divide the rows of `A`. When you do not specify distributions for any other dimension, the `mat2cell` function creates an `n`-by-1 cell array `C`, where `n == numel(rowDist)`.

Output Arguments

`C`

Cell array. The *k*th dimension of array `C` is given by `size(C, *k*) == numel(dim*k*Dist)`. The *k*th dimension of the *i*th cell of `C` is given by `size(C{i}, *k*) == dim*k*Dist(i)`.

Examples

Divide the 5-by-4 matrix `X` into 2-by-3 and 2-by-2 matrices contained in a cell array.

```
X = reshape(1:20,5,4)'
```

```
C = mat2cell(X, [2 2], [3 2])
celldisp(C)
```

This code returns

```
X =
     1     2     3     4     5
     6     7     8     9    10
    11    12    13    14    15
    16    17    18    19    20

C =
    [2x3 double]    [2x2 double]
    [2x3 double]    [2x2 double]

C{1,1} =
     1     2     3
     6     7     8

C{2,1} =
    11    12    13
    16    17    18

C{1,2} =
     4     5
     9    10

C{2,2} =
    14    15
    19    20
```

Divide X (created in the previous example) into a 2-by-1 cell array.

```
C = mat2cell(X, [1 3])
celldisp(C)
```

This code returns

```
C =
    [1x5 double]
    [3x5 double]

C{1} =
     1     2     3     4     5
```

```
C{2} =
     6     7     8     9    10
    11    12    13    14    15
    16    17    18    19    20
```

See Also

cell2mat | num2cell

Introduced before R2006a

mat2str

Convert matrix to character vector

Syntax

```
str = mat2str(A)
str = mat2str(A,n)
str = mat2str(A, 'class')
str = mat2str(A, n, 'class')
```

Description

`str = mat2str(A)` converts matrix `A` into a character vector. The character vector is suitable for input to the `eval` function such that `eval(str)` produces the original matrix to within 15 digits of precision.

`str = mat2str(A,n)` converts matrix `A` using `n` digits of precision.

`str = mat2str(A, 'class')` creates a character vector with the name of the class of `A` included. This option ensures that the result of evaluating `str` will also contain the class information.

`str = mat2str(A, n, 'class')` uses `n` digits of precision and includes the class information.

Limitations

The `mat2str` function is intended to operate on scalar, vector, or rectangular array inputs only. An error will result if `A` is a multidimensional array.

Examples

Example 1

Consider the matrix

```
x = [3.85 2.91; 7.74 8.99]

x =

    3.8500    2.9100
    7.7400    8.9900
```

The statement

```
A = mat2str(x)
```

produces

```
A =

[3.85 2.91;7.74 8.99]
```

where A is a character vector of 21 characters, including the square brackets, spaces, and a semicolon.

`eval(mat2str(x))` reproduces `x`.

Example 2

Create a 1-by-6 matrix of signed 16-bit integers, and then use `mat2str` to convert the matrix to a 1-by-33 character vector, A. Note that A includes the class name, `int16`:

```
x1 = int16([-300 407 213 418 32 -125]);

A = mat2str(x1, 'class')
A =

int16([-300 407 213 418 32 -125])

class(A)

ans =

char
```

Evaluating A gives you an output `x2` that is the same as the original `int16` matrix:

```
x2 = eval(A);
```

```
if isnumeric(x2) && isa(x2, 'int16') && all(x2 == x1)
   disp 'Conversion back to int16 worked'
end
```

```
Conversion back to int16 worked
```

See Also

num2str | int2str | str2num | sprintf | fprintf

Introduced before R2006a

material

Control reflectance properties of surfaces and patches

Syntax

```
material shiny
material dull
material metal
material([ka kd ks])
material([ka kd ks n])
material([ka kd ks n sc])
material default
```

Description

`material` sets the lighting characteristics of `surface` and `patch` objects.

`material shiny` sets the reflectance properties so that the object has a high specular reflectance relative to the diffuse and ambient light, and the color of the specular light depends only on the color of the light source.

`material dull` sets the reflectance properties so that the object reflects more diffuse light and has no specular highlights, but the color of the reflected light depends only on the light source.

`material metal` sets the reflectance properties so that the object has a very high specular reflectance, very low ambient and diffuse reflectance, and the color of the reflected light depends on both the color of the light source and the color of the object.

`material([ka kd ks])` sets the ambient/diffuse/specular strength of the objects.

`material([ka kd ks n])` sets the ambient/diffuse/specular strength and specular exponent of the objects.

`material([ka kd ks n sc])` sets the ambient/diffuse/specular strength, specular exponent, and specular color reflectance of the objects.

`material default` sets the ambient/diffuse/specular strength, specular exponent, and specular color reflectance of the objects to their defaults.

Tips

The `material` command sets the `AmbientStrength`, `DiffuseStrength`, `SpecularStrength`, `SpecularExponent`, and `SpecularColorReflectance` properties of all `surface` and `patch` objects in the axes. There must be visible `light` objects in the `axes` for lighting to be enabled. Look at the `material.m` file to see the actual values set (enter the command `type material`).

See Also

`lighting` | `patch` | `light` | `surface`

Topics

"Lighting Overview"

Introduced before R2006a

matfile

Access and change variables directly in MAT-files, without loading into memory

Syntax

```
m = matfile(filename)
m = matfile(filename,'Writable',isWritable)
```

Description

`m = matfile(filename)` creates a MAT-file object, `m`, connected to the MAT-file named `filename`. The object allows you to access and change variables directly in a MAT-file, without having to load the variables into memory.

The partial loading and saving that the `matfile` function provides requires less memory than the `load` and `save` commands, which always operate on entire variables.

`m = matfile(filename,'Writable',isWritable)` enables or disables write access to the file.

Examples

Load Entire Variable

Load variable `topo` from the example file, `topography.mat`.

Open the example MAT-file, `topography.mat`.

```
filename = 'topography.mat';
m = matfile(filename);
```

Read the variable `topo` from the MAT-file.

```
topo = m.topo;
```

MATLAB® loads the entire variable, `topo`, into the workspace.

Save Entire Variable to Existing MAT-file

Generate a 20-by-20 example array, `x`, and save it to a MAT-file called `myFile.mat`.

```
x = magic(20);
save('myFile.mat','x');
```

Create a MAT-file object connected to the existing MAT-file named `myFile.mat`. Enable write access to the MAT-file by setting `Writable` to `true`.

```
m = matfile('myFile.mat','Writable',true);
```

Generate a 15-by-15 example array, `y`.

```
y = magic(15);
```

Save `y` to the MAT-file. Specify the variable in the MAT-file using dot notation similar to accessing fields of structure arrays.

```
m.y = y;
```

MATLAB® adds a variable named `y` to the file.

Display all variables stored in the MAT-file, `myFile.mat`.

```
whos('-file','myFile.mat')
```

```
  Name        Size            Bytes  Class     Attributes

  x          20x20             3200  double
  y          15x15             1800  double
```

Load and Save Parts of Variables

Access specific elements of a MAT-file variable.

Open a new MAT-file, `myFile2.mat`.

```
m = matfile('myFile2.mat');
```

Save a 20-by-20 example array to part of a variable, `y`, in `myFile2.mat`. Specify the variable in the MAT-file using dot notation similar to accessing fields of structure arrays.

```
m.y(81:100,81:100) = magic(20);
```

MATLAB® inserts the 20-by-20 array into the elements of `y` specified by the indices `(81:100,81:100)`.

Read a subset of array `y` into a new workspace variable, `z`.

```
z = m.y(85:94,85:94);
```

MATLAB reads the 10-by-10 subarray specified by the indices `(85:94,85:94)` from the MAT-file into workspace variable `z`.

Determine Size of Variables

Determine the size of a variable, and then calculate the average of each column.

Open the example MAT-file, `stocks.mat`.

```
filename = 'stocks.mat';
m = matfile(filename);
```

Determine the size of the variable, `stocks`, in `stocks.mat`.

```
[nrows,ncols] = size(m,'stocks');
```

Compute the average of each column of the variable `stocks`.

```
avgs = zeros(1,ncols);
for i = 1:ncols
    avgs(i) = mean(m.stocks(:,i));
end
```

Enable Write Access to MAT-file

Enable write access to the MAT-file, `myFile.mat`, by setting `Writable` to `true` when you open the MAT-file.

```
filename = 'myFile.mat';
m = matfile(filename,'Writable',true);
```

Alternatively, set `Properties.Writable` in a separate step after you open the MAT-file.

```
m.Properties.Writable = true;
```

Input Arguments

`filename` — Name of MAT-file

character vector

Name of a MAT-file, specified as a character vector. If the file is not in the current folder, `filename` must include a full or a relative path. If `filename` does not include an extension, then `matfile` appends `.mat`.

If the file does not exist, then `matfile` creates a Version 7.3 MAT-file on the first assignment to a variable.

`matfile` only supports efficient partial loading and saving for MAT-files in Version 7.3 format. If you index into a variable in a Version 7 (the current default) or earlier MAT-file, MATLAB warns and temporarily loads the entire contents of the variable.

Example: `'myFile.mat'`

Data Types: `char`

`isWritable` — Write access to MAT-file

`true` | `false`

Write access to the MAT-file, specified as either `true` or `false`.

- `true` enables saving to the MAT-file. If the file is read only, MATLAB changes the system permissions with the `fileattrib` function.
- `false` disables saving to the MAT-file. MATLAB does not change the system permissions.

The default value is `true` for new files, and `false` for existing files.

Data Types: `logical`

Output Arguments

`m` — MAT-file object

`matlab.io.MatFile` object

MAT-file object connected to a MAT-file.

Access variables in the MAT-file with dot notation similar to accessing fields of structure arrays:

- To load part of variable `varName` from the MAT-file corresponding to `m`, call:

  ```
  loadedData = m.varName(indices);
  ```

- To save part of variable `varName` to the MAT-file corresponding to `m`, call:

  ```
  m.varName(indices) = dataToSave;
  ```

When accessing variables, specify indices for all dimensions. Indices can be a single value, an equally spaced range of increasing values, or a colon `(:)`; for example:

```
m.varName(100:500,200:600)
m.varName(:,501:1000)
m.varName(1:2:1000,80)
```

Limitations

- `matfile` does not support linear indexing. You must specify indices for all dimensions.
- `matfile` does not support indexing into:
  - Variables of tables
  - Cells of cell arrays
  - Fields of structure arrays
  - User-defined classes
  - Sparse arrays
- You cannot assign complex values to an indexed portion of a real array.
- You cannot evaluate function handles using the `m` output. For example, if your MAT-file contains function handle `myfunc`, the syntax `m.myfunc()` attempts to index into the function handle, and does not invoke the function.
- Efficient partial loading and saving requires Version 7.3 MAT-files. To create a Version 7.3 MAT-file, call the `save` function with the `'-v7.3'` option. For example, to convert an existing MAT-file named `durer.mat` to Version 7.3, call:

  ```
  load('durer.mat');
  save('mycopy_durer.mat','-v7.3');
  ```

Tips

- Using the `end` keyword as part of an index causes MATLAB to load the entire variable into memory. For very large variables, this load operation results in `Out of Memory` errors. Rather than using `end`, determine the extent of a variable, `myVar`, with the size method, such as:

  ```
  sizeMyVar = size(m,'myVar')
  ```

See Also

See Also

`load` | `save` | size | whos

Topics

"Save and Load Parts of Variables in MAT-Files"
MAT-File Versions

Introduced in R2011b

matlab.addons.toolbox.installedToolboxes

Return information about installed toolboxes

Syntax

```
toolboxes = matlab.addons.toolbox.installedToolboxes
```

Description

`toolboxes = matlab.addons.toolbox.installedToolboxes` returns a structure array containing information about the installed toolboxes. The structure array does not include information about MathWorks toolboxes.

Examples

Display Installed Toolbox Information

Assume that you previously installed two toolboxes, `myToolbox` and `myOtherToolbox`. Store information about these toolboxes in a variable.

```
toolboxes = matlab.addons.toolbox.installedToolboxes
```

```
toolboxes =

1x2 struct array with fields:

    Name
    Version
    Guid
```

Use `struct2table` to format this stored information as a readable table.

```
struct2table(toolboxes)
```

```
ans =

          Name          Version                      Guid
```

```
_________________    _______    ____________________________________
'myToolbox'          '1.5.2'    'd0169b4a-fe74-463f-981a-26160c94cbe5'
'myOtherToolbox'     '1.0'      '1deb72c1-725f-4e1b-a1a7-dcc8e75453bb'
```

Output Arguments

`toolboxes` — Information about installed toolboxes
structure array

Information about installed toolboxes, returned as a structure array with one element for each installed toolbox. Each element of the structure array has the following fields.

Field	Description
`Name`	Name of the toolbox
`Version`	Toolbox version
`Guid`	Unique toolbox identifier

Tips

- To view information about MathWorks toolboxes, see `ver`.

Alternatives

You can query your installed toolboxes from the Add-On Manager UI. For more information, see “Manage Your Add-Ons”.

See Also

See Also

`matlab.addons.toolbox.installToolbox` | `matlab.addons.toolbox.packageToolbox` | `matlab.addons.toolbox.toolboxVersion` | `matlab.addons.toolbox.uninstallToolbox`

Introduced in R2016a

matlab.addons.toolbox.installToolbox

Install toolbox file

Syntax

```
installedToolbox = matlab.addons.toolbox.installToolbox(toolboxFile)
installedToolbox = matlab.addons.toolbox.installToolbox(toolboxFile,
agreeToLicense)
```

Description

`installedToolbox = matlab.addons.toolbox.installToolbox(toolboxFile)` installs the toolbox file (`.mltbx` file) specified by `toolboxFile` and returns information about the toolbox.

`installedToolbox = matlab.addons.toolbox.installToolbox(toolboxFile, agreeToLicense)` accepts the license agreement before installing the toolbox if `agreeToLicense` is `true`.

Examples

Install Toolbox

Assume that you have the `myToolbox.mltbx` toolbox file in your current working folder. Install the toolbox.

```
toolboxFile = 'MyToolbox.mltbx';
installedToolbox = matlab.addons.toolbox.installToolbox(toolboxFile)
```

```
installedToolbox = 

       Name: 'myToolbox'
    Version: '2.0'
       Guid: 'd0169b4a-fe74-463f-981a-26160c94cbe5'
```

If the toolbox contains a licenses agreement, a dialog box opens to prompt you to agree to the license before installation.

Accept License Agreement and Install Toolbox

Assume that you have the `myToolbox.mltbx` toolbox file in your `C:\Downloads\` folder, and that the toolbox contains a license agreement. Install the toolbox and prevent MATLAB from opening the license agreement dialog box by indicating you accept the license.

```
toolboxFile = 'MyToolbox.mltbx';
agreeToLicense = true;
installedToolbox = matlab.addons.toolbox.installToolbox(toolboxFile,agreeToLicense)
```

```
installedToolbox = 

       Name: 'myToolbox'
    Version: '2.0'
       Guid: 'd0169b4a-fe74-463f-981a-26160c94cbe5'
```

Input Arguments

`toolboxFile` — Name of toolbox file

character vector | string scalar

Name of the toolbox file (`.mltbx` file), specified as a character vector or string scalar. The name includes the relative or absolute path to the file.

Example: `toolboxFile = 'myToolbox.mltbx'`

Example: `toolboxFile = "C:\Work\myOtherToolbox.mltbx"`

`agreeToLicense` — Indicator to accept license agreement

`false` (default) | `true`

Indicator to accept license agreement, specified as `false` or `true`. By default, `agreeToLicense` is `false`. If a toolbox contains a license agreement:

- If `agreeToLicense` is `false`, then MATLAB displays a dialog box where you can accept the license or cancel installation.
- If `agreeToLicense` is `true`, then MATLAB installs the toolbox without opening the license agreement dialog box. By setting `agreeToLicense` to `true`, you accept the

terms of the license agreement. Be sure that you have reviewed the license agreement before installing the toolbox.

If a toolbox does not have a license agreement, the value of `agreeToLicense` has no effect on installation.

Data Types: `logical`

Output Arguments

`installedToolbox` — Information about installed toolbox
structure

Information about the installed toolbox, returned as a structure. The structure has the following fields.

Field	Description
`Name`	Name of the toolbox
`Version`	Toolbox version
`Guid`	Unique toolbox identifier

Alternatives

You can install toolboxes from the Add-On Explorer UI. For more information, see "Get Add-Ons".

See Also

See Also

`matlab.addons.toolbox.installedToolboxes` | `matlab.addons.toolbox.packageToolbox` | `matlab.addons.toolbox.toolboxVersion` | `matlab.addons.toolbox.uninstallToolbox`

Introduced in R2016a

matlab.addons.toolbox.packageToolbox

Package toolbox project

Syntax

```
matlab.addons.toolbox.packageToolbox(projectFile)
matlab.addons.toolbox.packageToolbox(projectFile,outputFile)
```

Description

`matlab.addons.toolbox.packageToolbox(projectFile)` packages the toolbox project file (`.prj` file) into a MATLAB toolbox file (`.mltbx` file) of the same name. For you to package a toolbox, the toolbox root folder and the toolbox files must be in the same location as when you created the toolbox project file.

`matlab.addons.toolbox.packageToolbox(projectFile,outputFile)` packages the toolbox and saves the `.mltbx` file with the name and location specified by `outputFile`.

Examples

Package Toolbox

Assume that you have the `myToolbox.prj` toolbox project file in your current working folder. Package the toolbox in the same folder.

```
projectFile = 'myToolbox.prj';
matlab.addons.toolbox.packageToolbox(projectFile)
```

Specify Output File Name and Package Toolbox

Assume that you have the `myToolbox.prj` toolbox project file in your current working folder. Package the toolbox as `myFavoriteToolbox.mltbx`.

```
projectFile = 'myToolbox.prj';
outputFile = 'myFavoriteToolbox';
```

```
matlab.addons.toolbox.packageToolbox(projectFile,outputFile)
```

Input Arguments

`projectFile` — Name of toolbox project file

character vector | string scalar

Name of the toolbox project file (`.prj` file), specified as a character vector or string scalar. The name includes the relative or absolute path to the file.

Example: `projectFile = 'myToolbox.prj'`

Example: `projectFile = "C:\Work\myOtherToolbox.prj"`

`outputFile` — Name of output MATLAB toolbox file

character vector | string scalar

Name of the output MATLAB toolbox file (`.mltbx` file), specified as a character vector or string scalar. The name includes the relative or absolute path to the file. If the value of `outputFile` does not contain the `.mltbx` extension, the `packageToolbox` function appends the extension.

Example: `outputFile = "myToolbox.mltbx"`

Example: `outputFile = 'C:\Work\myOtherToolbox'`

Alternatives

You can package toolboxes from the Package a Toolbox UI. For more information, see "Create and Share Toolboxes".

See Also

See Also

`matlab.addons.toolbox.installedToolboxes` | `matlab.addons.toolbox.installToolbox` | `matlab.addons.toolbox.toolboxVersion` | `matlab.addons.toolbox.uninstallToolbox`

Introduced in R2016a

matlab.addons.toolbox.toolboxVersion

Query or modify version of toolbox

Syntax

```
currentVersion = matlab.addons.toolbox.toolboxVersion(toolboxFile)
previousVersion = matlab.addons.toolbox.toolboxVersion(toolboxFile,
newVersion)
```

Description

`currentVersion = matlab.addons.toolbox.toolboxVersion(toolboxFile)` queries `toolboxFile` for the current version number. You do not need to install the toolbox to query the version number.

`previousVersion = matlab.addons.toolbox.toolboxVersion(toolboxFile, newVersion)` sets the toolbox version number to `newVersion` and returns the previous version number.

Examples

Query Toolbox Version Number

Assume that you have the `myToolbox.mltbx` toolbox file on your MATLAB search path. Query the version number.

```
toolboxFile = 'myToolbox.mltbx';
currentVersion = matlab.addons.toolbox.toolboxVersion(toolboxFile)
```

```
currentVersion =

1.5.2
```

Set Toolbox Version Number

Assume that you have the `myToolbox.prj` toolbox project file on your MATLAB search path. Update the `myToolbox` version number to `2.0`.

```
toolboxFile = 'myToolbox.prj';
newVersion = '2.0';
previousVersion = matlab.addons.toolbox.toolboxVersion(toolboxFile,newVersion)
```

```
previousVersion =

1.5.2
```

Verify that the version number is now `2.0`.

```
currentVersion = matlab.addons.toolbox.toolboxVersion(toolboxFile)
```

```
currentVersion =

2.0
```

The version number is updated for the toolbox project file, but not for the MATLAB toolbox file (`.mltbx`).

```
matlab.addons.toolbox.toolboxVersion('myToolbox.mltbx')
```

```
ans =

1.5.2
```

Repackage the toolbox to update the `.mltbx` file. For more information, see `matlab.addons.toolbox.packageToolbox`.

Input Arguments

`toolboxFile` — Name of toolbox file

character vector | string scalar

Name of the toolbox file, specified as a character vector or string scalar. The name includes the relative or absolute path to the toolbox file.

If you are only querying the toolbox version, `toolboxFile` can be a toolbox project file (`.prj`) or a MATLAB toolbox file (`.mltbx`).

If you are setting the toolbox version, `toolboxFile` must be a toolbox project file (`.prj`).

Example: `toolboxFile = 'myToolbox.mltbx'`

Example: `toolboxFile = "C:\Work\myOtherToolbox.prj"`

`newVersion` — New toolbox version number
character vector | string scalar

New toolbox version number, specified as a character vector or string scalar. Enter the toolbox version number in the *`Major.Minor.Bug.Build`* format. The *`Bug`* and *`Build`* segments are optional. Each segment of the version number is an integer.

Example: `newVersion = "2.0"`

Example: `newVersion = '3.7.12.2'`

Alternatives

You can query the version number of your toolbox from the Add-On Manager UI. For more information, see "Manage Your Add-Ons".

You can update the version number of your toolbox from the Package a Toolbox UI. For more information, see "Create and Share Toolboxes".

See Also

See Also

`matlab.addons.toolbox.installedToolboxes` | `matlab.addons.toolbox.installToolbox` | `matlab.addons.toolbox.packageToolbox` | `matlab.addons.toolbox.uninstallToolbox`

Introduced in R2016a

matlab.addons.toolbox.uninstallToolbox

Uninstall toolbox

Syntax

```
matlab.addons.toolbox.uninstallToolbox(installedToolbox)
```

Description

`matlab.addons.toolbox.uninstallToolbox(installedToolbox)` uninstalls the specified toolbox. MATLAB removes all the files and folders associated with the toolbox from the path and then deletes them.

Examples

Uninstall Toolbox

Assume that you previously installed two toolboxes, `myToolbox` and `myOtherToolbox`, and you want to uninstall the `myToolbox` toolbox.

Obtain the structure array of installed toolboxes, and display it as a table.

```
toolboxes = matlab.addons.toolbox.installedToolboxes;
struct2table(toolboxes)
```

```
ans =

          Name           Version                     Guid
    _________________    _______    ____________________________________

    'myToolbox'          '1.5.2'    'd0169b4a-fe74-463f-981a-26160c94cbe5'
    'myOtherToolbox'     '1.0'      '1deb72c1-725f-4e1b-a1a7-dcc8e75453bb'
```

Read the table and note the location of the toolbox you want to uninstall. Since `myToolbox` is listed first in the table, information about it can be found in `toolboxes(1)`.

```
installedToolbox = toolboxes(1)
```

```
installedToolbox = 

       Name: 'myToolbox'
    Version: '1.5.2'
       Guid: 'd0169b4a-fe74-463f-981a-26160c94cbe5'
```

Uninstall the toolbox. If the uninstallation process is successful, MATLAB does not display output.

```
matlab.addons.toolbox.uninstallToolbox(installedToolbox)
```

Input Arguments

`installedToolbox` — Information about toolbox to uninstall

structure

Information about the toolbox to uninstall, specified as a structure.
The structure is an element of the structure array returned by the `matlab.addons.toolbox.installedToolboxes` function, and it has the following fields.

Field	Description
`Name`	Name of the toolbox
`Version`	Toolbox version
`Guid`	Unique toolbox identifier

MATLAB uses the `Guid` field to determine which toolbox to uninstall.

Data Types: `struct`

Alternatives

You can uninstall toolboxes from the Add-On Manager UI. For more information, see “Manage Your Add-Ons”.

See Also

See Also

`matlab.addons.toolbox.installedToolboxes` | `matlab.addons.toolbox.installToolbox` | `matlab.addons.toolbox.packageToolbox` | `matlab.addons.toolbox.toolboxVersion`

Introduced in R2016a

matlab.codetools.requiredFilesAndProducts

List dependencies of MATLAB program files

Syntax

```
fList = matlab.codetools.requiredFilesAndProducts(files)
[fList, pList] = matlab.codetools.requiredFilesAndProducts(files)
[fList, pList] =
matlab.codetools.requiredFilesAndProducts( ___ ,'toponly')
```

Description

`fList = matlab.codetools.requiredFilesAndProducts(files)` returns a list of the MATLAB program files required to run the program files specified by `files`.

The `matlab.codetools.requiredFilesAndProducts` function is intended to provide you with information to pass on to consumers of your MATLAB program files.

`[fList, pList] = matlab.codetools.requiredFilesAndProducts(files)` also returns a list of the MathWorks products possibly required to run the program files specified by `files`.

If you use the `matlab.codetools.requiredFilesAndProducts` function on MATLAB code that you received, `plist` only includes the required toolboxes that are installed on your system. In this case, `plist` can be incomplete.

`[fList, pList] = matlab.codetools.requiredFilesAndProducts( ___ ,'toponly')` indicates that for a file or product to be included in the output, it must be used directly by at least one file specified in `files`. The `'toponly'` input option is case insensitive.

Examples

Identify Required Files and Products for MATLAB Toolbox Function

Determine the required files and products for the `edge` function in the Image Processing Toolbox.

```
[fList,pList] = matlab.codetools.requiredFilesAndProducts('edge.m')
```

```
fList =

     {}


pList =

1x2 struct array with fields:

    Name
    Version
    ProductNumber
    Certain
```

There are no required MATLAB files, but there are two required products.

List the required products.

```
{pList.Name}'
```

```
ans =

    'MATLAB'
    'Image Processing Toolbox'
```

Identify Required Files and Products for Your MATLAB Program Files

In your current working folder, create a function in the file `getRandomNumber.m`.

```
function a = getRandomNumber
    rng shuffle
    a = rand;
end
```

Now, at the command line, determine the required files and products for `getRandomNumber.m`.

```
[fList,pList] = matlab.codetools.requiredFilesAndProducts('getRandomNumber.m')
```

```
fList =

    'C:\work\getRandomNumber.m'
```

```
pList =

             Name: 'MATLAB'
          Version: '8.5'
    ProductNumber: 1
          Certain: 1
```

The only file required to run the `getRandomNumber` function is the function file itself. The only required MathWorks product is MATLAB.

In your current working folder, create a function in the file `displayNumber.m`.

```
function displayNumber
    a = getRandomNumber;
    disp(['Your number is ' num2str(a)])
end
```

Now, at the command line, determine the required files and products for `displayNumber.m`.

```
[fList,pList] = matlab.codetools.requiredFilesAndProducts('displayNumber.m')
```

```
fList =

    'C:\work\displayNumber.m'    'C:\work\getRandomNumber.m'


pList =

             Name: 'MATLAB'
          Version: '8.5'
    ProductNumber: 1
          Certain: 1
```

In addition to the function file itself, the `displayNumber` function requires the `getRandomNumber.m` file. The only required MathWorks product is MATLAB.

Identify Top-Level Dependencies Only

In your current working folder, create a handle class in the file `ExampleHandle.m`.

```
classdef ExampleHandle < handle
    % class content
end
```

In your current working folder, create a class in the file `AnotherExampleHandle.m` that inherits from `ExampleHandle`.

```
classdef AnotherExampleHandle < ExampleHandle
    % class content
end
```

In your current working folder, create a function in the file `getHandles.m` that instantiates `AnotherExampleHandle` objects.

```
function [h1,h2] = getHandles()
    h1 = AnotherExampleHandle;
    h2 = AnotherExampleHandle;
end
```

Now, at the command line, determine the required files for `getHandles.m`.

```
[fList,~] = matlab.codetools.requiredFilesAndProducts('getHandles.m');
fList'
```

```
ans =

    'C:\work\AnotherExampleHandle.m'
    'C:\work\ExampleHandle.m'
    'C:\work\getHandles.m'
```

Determine the required files that are directly required for `getHandles.m`.

```
[fList,~] = matlab.codetools.requiredFilesAndProducts('getHandles.m','toponly')
```

```
fList =

    'C:\work\AnotherExampleHandle.m'    'C:\work\getHandles.m'
```

Although `AnotherExampleHandle.m` requires `ExampleHandle.m`, that file is not a direct requirement for `getHandles.m`.

Input Arguments

`files` — List of files for analysis

character vector | cell array of character vectors | string array

List of files for analysis, specified as a character vector, a cell array of character vectors, or a string array. Each element is the name of a single MATLAB program file. For

example, `files` is a list of MATLAB program files that you intend to provide to other users. The `matlab.codetools.requiredFilesAndProducts` function provides you with requirements information to pass along with your files.

To ensure an accurate dependency report, `files` and dependencies must be on the MATLAB path. `matlab.codetools.requiredFilesAndProducts` does not return information about dependent files not on the path.

Example: `'myFile.m'` or `"C:\Program Files\MATLAB\R2014a\my_work\myFile.m"`

Example: `{'myFile.m','myOtherFile.m'}`

Example: `cellstr(ls('*.m'))`

Output Arguments

`fList` — List of user-authored MATLAB program files

cell array of character vectors

List of user-authored MATLAB program files required by `files`, returned as a cell array of character vectors. Each character vector indicates the full path of the required file. `fList` does not include built-in MATLAB files, since these files are installed with the products listed in `pList`.

`fList` includes dependent files that are accessed using standard file format and low-level I/O functions. These dependent files include text files, spreadsheets, images, audio, video, and XML files. For example, if you are analyzing a file that contains the code `load('mydata.mat')`, the `matlab.codetools.requiredFilesAndProducts` function includes `mydata.mat` in `fList`.

Functions that support automatic detection of dependent files include `audioinfo`, `audioread`, `csvread`, `daqread`, `dlmread`, `fileread`, `fopen`, `imfinfo`, `importdata`, `imread`, `load`, `matfile`, `mmfileinfo`, `open`, `readtable`, `type`, `VideoReader`, `xlsfinfo`, `xlsread`, `xmlread`, and `xslt`.

`pList` — List of MathWorks products

structure or array of structures

List of MathWorks products possibly required by `files`, returned as a structure or array of structures. Each product is described by name (`Name` field), version (`Version` field),

product number (`ProductNumber` field), and a certainty indicator (`Certain` field). The `Certain` field has a value of 1 if `matlab.codetools.requiredFilesAndProducts` determines the product is required by the specified program files, `files`, or a value of 0 if the product is possibly required.

The `matlab.codetools.requiredFilesAndProducts` function is intended to provide you with information to pass on to consumers of your MATLAB program files. The version numbers indicate the version of the products you have installed when you execute the function. `Version` is not an indicator of backward compatibility.

See Also

Topics

"Identify Program Dependencies"

Introduced in R2014a

matlab.engine.engineName

Return name of shared MATLAB session

Syntax

```
name = matlab.engine.engineName
```

Description

`name = matlab.engine.engineName` returns the name of the MATLAB session if the session is shared. Otherwise, `matlab.engine.engineName` returns the empty value `''`.

Examples

Name of Shared MATLAB Session

Share the MATLAB session and return its name.

```
matlab.engine.shareEngine('Engine_1')
name = matlab.engine.engineName
```

```
name =

Engine_1
```

- "Connect Python to Running MATLAB Session"
- "Connect Java to Running MATLAB Session"

See Also

See Also

`matlab.engine.isEngineShared` | `matlab.engine.shareEngine`

Topics

"Connect Python to Running MATLAB Session"
"Connect Java to Running MATLAB Session"

Introduced in R2015b

matlab.engine.isEngineShared

Determine if MATLAB session is shared

Syntax

```
tf = matlab.engine.isEngineShared
```

Description

`tf = matlab.engine.isEngineShared` returns logical 1 (true) if a MATLAB session is shared. It returns logical 0 (false) if the session is not shared. By default, MATLAB sessions are not shared.

Examples

Test If MATLAB Session Is Shared

Determine if the current MATLAB session is shared for connections to other processes.

```
tf = matlab.engine.isEngineShared
```

```
tf =

     0
```

By default, the session is not shared.

- "Connect Python to Running MATLAB Session"
- "Connect Java to Running MATLAB Session"

See Also

See Also

`matlab.engine.engineName` | `matlab.engine.shareEngine`

Topics

"Connect Python to Running MATLAB Session"
"Connect Java to Running MATLAB Session"

Introduced in R2015b

matlab.engine.shareEngine

Convert running MATLAB session to shared session

Syntax

```
matlab.engine.shareEngine
matlab.engine.shareEngine(name)
```

Description

`matlab.engine.shareEngine` converts the current MATLAB session to a shared session with a default name. The default name is `'MATLAB_<process_ID>'`, where `<process_ID>` is a number that indicates the process ID of the current MATLAB session.

`matlab.engine.shareEngine(name)` converts the current MATLAB session to a shared session and gives it the name specified by `name`.

If there is already a shared MATLAB session on your local machine that has the name specified by `name`, then `matlab.engine.shareEngine` converts the current session to a shared session with a default name.

Examples

Share MATLAB Session

Convert the current MATLAB session to a shared session with a default name.

```
matlab.engine.shareEngine
matlab.engine.engineName
```

```
ans =

MATLAB_49593
```

`matlab.engine.shareEngine` gives the shared session the default name `MATLAB_49593`, where 49593 is the process ID of the MATLAB session. The process ID is different each time you start MATLAB.

Name and Share Your MATLAB Session

Give a name to the current MATLAB session and share the session.

```
matlab.engine.shareEngine('Engine_1')
matlab.engine.engineName
```

```
ans =

Engine_1
```

- "Connect Python to Running MATLAB Session"
- "Connect Java to Running MATLAB Session"

Input Arguments

`name` — Name of shared MATLAB session

character array

Name of the shared MATLAB session, specified as a character array. `name` must be a valid MATLAB variable name.

Tips

You also can use a MATLAB startup option to start a shared session. To start a shared MATLAB session, type this command at the operating system prompt:

```
matlab -r 'matlab.engine.shareEngine'
```

See Also

See Also

`matlab.engine.engineName` | `matlab.engine.isEngineShared`

Topics

"Connect Python to Running MATLAB Session"
"Connect Java to Running MATLAB Session"

Introduced in R2015b

matlab.io.MatFile class

Package: matlab.io

Load and save parts of variables in MAT-files

Description

The `matfile` function constructs a `matlab.io.MatFile` object that corresponds to a MAT-File, such as

```
matObj = matfile('myFile.mat')
```

Access variables in the MAT-file as properties of `matObj`, with dot notation similar to accessing fields of structs. The syntax for loading and saving part of variable `varName` in the MAT-file corresponding to `matObj` is:

```
loadedData = matObj.varName(indices);    % Load into workspace
matObj.varName(indices) = dataToSave;    % Save to file
```

When indexing, specify indices for all dimensions. Indices can be a single value, an equally spaced range of increasing values, or a colon `(:)`, such as

```
matObj.varName(100:500, 200:600)
matObj.varName(:, 501:1000)
matObj.varName(1:2:1000, 80)
```

Limitations

- Using the `end` keyword as part of an index causes MATLAB to load the entire variable into memory. For very large variables, this load operation results in `Out of Memory` errors. Rather than using `end`, determine the extent of a variable with the size method, such as:

  ```
  sizeMyVar = size(matObj,'myVar')
  ```
- `matfile` does not support linear indexing. You must specify indices for all dimensions.
- `matfile` does not support indexing into:
  - Cells of cell arrays

  - Fields of structs
  - User-defined classes
  - Sparse arrays
- You cannot assign complex values to an indexed portion of a real array.
- You cannot evaluate function handles using a `MatFile` object. For example, if your MAT-file contains function handle `myfunc`, the syntax `matObj.myfunc()` attempts to index into the function handle, and does not invoke the function.

Construction

`matObj = matfile(filename)` constructs a `matlab.io.MatFile` object that can load or save parts of variables in MAT-file `filename`. MATLAB does not load any data from the file into memory when creating the object.

`matObj = matfile(filename,'Writable',isWritable)` enables or disables write access to the file for object `matObj`. Possible values for `isWritable` are logical `true` (1) or `false` (0).

Input Arguments

`filename`

Character vector that specifies the name of a MAT-file.

`filename` can include a full or partial path, otherwise `matfile` searches for the file along the MATLAB search path. If `filename` does not include an extension, `matfile` appends `.mat`.

If the file does not exist, `matfile` creates a Version 7.3 MAT-file on the first assignment to a variable.

`matfile` only supports partial loading and saving for MAT-files in Version 7.3 format (described in MAT-File Versions). If you index into a variable in a Version 7 (the current default) or earlier MAT-file, MATLAB warns and temporarily loads the entire contents of the variable.

`'Writable'`

Parameter to use with the `isWritable` argument.

isWritable

Logical value that specifies whether to allow saving to the file. Possible values:

`true (1)`	Enable saving. If the file is read only, change the system permissions with `fileattrib`.
`false (0)`	Disable saving with `matfile`. MATLAB does not change the system permissions.

Default: `true` for new files, `false` for existing files

Properties

Properties.Source

Character vector that contains the fully qualified path to the file. Read only.

Properties.Writable

Logical value that specifies whether to allow saving to the file. Possible values:

`true (1)`	Enable saving. If the file is read only, change the system permissions with `fileattrib`.
`false (0)`	Disable saving with `matfile`. MATLAB does not change the system permissions.

Default: `true` for new files, `false` for existing files

Methods

size	Array dimensions
who	Names of variables in MAT-file
whos	Names, sizes, and types of variables in MAT-file

You cannot access help for these methods using the `help` command. Find help on the methods from the command line using the `doc` command, such as `doc matlab.io.MatFile/size`.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create `myFile.mat` in a temporary folder and save data to part of variable `savedVar`:

```
filename = fullfile(tempdir,'myFile.mat');
matObj = matfile(filename);
matObj.savedVar(81:100,81:100) = magic(20);
```

Load part of the data into variable `loadVar`:

```
loadVar = matObj.savedVar(85:94,85:94);
```

Load or save an entire variable by omitting the indices. For example, load variable `topo` from `topography.mat`:

```
filename = 'topography.mat';
matObj = matfile(filename);
topo = matObj.topo;
```

Determine the dimensions of a variable, and process one part of the variable at a time. In this case, calculate and store the average of each column of variable `stocks` in the example file `stocks.mat`:

```
filename = 'stocks.mat';
matObj = matfile(filename);
[nrows, ncols] = size(matObj,'stocks');

avgs = zeros(1,ncols);
for idx = 1:ncols
    avgs(idx) = mean(matObj.stocks(:,idx));
end
```

By default, `matfile` only supports loading data from existing files. To enable saving, set `Writable` to `true` either during construction of the object,

```
filename = 'myFile.mat';
matObj = matfile(filename,'Writable',true);
```

or in a separate step, by setting `Properties.Writable`:

```
filename = 'myFile.mat';
matObj = matfile(filename);
matObj.Properties.Writable = true;
```

See Also

`load` | `save` | size | whos

matlab.io.fits.closeFile

Close FITS file

Syntax

```
closeFile(fptr)
```

Description

`closeFile(fptr)` closes an open FITS file.

This function corresponds to the `fits_close_file (ffclos)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits','READONLY');
fits.closeFile(fptr);
```

See Also

See Also

`createFile` | `openFile`

matlab.io.fits.createFile

Create FITS file

Syntax

```
fptr = createFile(filename)
```

Description

`fptr = createFile(filename)` creates a FITS file. An error will be returned if the specified file already exists, unless the filename is prefixed with an exclamation point (!). In that case CFITSIO will overwrite (delete) any existing file with the same name.

This function corresponds to the `fits_create_file (ffinit)` function in the CFITSIO library C API.

Examples

Create a new FITS file.

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'uint8',[256 512]);
fits.closeFile(fptr);
fitsdisp('myfile.fits');
```

See Also

See Also

`closeFile` | `createImg` | `createTbl` | `openFile`

matlab.io.fits.deleteFile

Delete FITS file

Syntax

```
deleteFile(fptr)
```

Description

`deleteFile(fptr)` closes and deletes an open FITS file. This can be useful if a FITS file cannot be properly closed.

This function corresponds to the `fits_delete_file (ffdelt)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','tst0012.fits');
copyfile(srcFile,'myfile.fits');
fileattrib('myfile.fits','+w');
fptr = fits.openFile('myfile.fits','readwrite');
fits.deleteFile(fptr);
fptrs = fits.getOpenFiles()
```

See Also

See Also

`closeFile` | `createFile`

matlab.io.fits.fileName

Name of FITS file

Syntax

```
name = fileName(fptr)
```

Description

`name = fileName(fptr)` returns the name of the FITS file associated with the file handle.

This function corresponds to the `fits_file_name (ffflnm)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits','READONLY');
name = fits.fileName(fptr);
fits.closeFile(fptr);
```

See Also

See Also

`createFile` | `openFile`

matlab.io.fits.fileMode

I/O mode of FITS file

Syntax

```
mode = fileMode(fptr)
```

Description

`mode = fileMode(fptr)` returns the I/O mode of the opened FITS file. Possible values returned for `mode` are `'READONLY'` or `'READWRITE'`.

This function corresponds to the `fits_file_mode (ffflmd)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
mode = fits.fileMode(fptr);
fits.closeFile(fptr);
```

See Also

See Also

`createFile` | `openFile`

matlab.io.fits.openFile

Open FITS file

Syntax

```
fptr = openFile(filename)
fptr = openFile(filename,mode)
```

Description

`fptr = openFile(filename)` opens a existing FITS file in read-only mode and returns a file pointer, `fptr`, which references the primary array (first header data unit, or "HDU").

`fptr = openFile(filename,mode)` opens a existing FITS file according to the `mode`, which describes the type of access. `mode` may be either `'READONLY'` or `'READWRITE'`.

This function corresponds to the `fits_open_file (ffopen)` function in the CFITSIO library C API.

Examples

Open a file in read-only mode and read image data from the primary array.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
imagedata = fits.readImg(fptr);
fits.closeFile(fptr);
```

Open a file in read-write mode and add a comment to the primary array.

```
import matlab.io.*
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','tst0012.fits');
copyfile(srcFile,'myfile.fits');
fileattrib('myfile.fits','+w');
fptr = fits.openFile('myfile.fits','readwrite');
fits.writeComment(fptr,'This is just a comment.');
```

```
fits.closeFile(fptr);
```

See Also

See Also

closeFile | createFile

matlab.io.fits.createImg

Create FITS image

Syntax

```
createImg(fptr,bitpix,naxes)
```

Description

`createImg(fptr,bitpix,naxes)` creates a new primary image or image extension with a specified datatype `bitpix` and size `naxes`. If the FITS file is currently empty then a primary array is created, otherwise a new image extension is appended to the file.

The first two elements of `naxes` correspond to the NAXIS2 and NAXIS1 keywords, while any additional elements correspond to the NAXIS3, NAXIS4 ... NAXISn keywords.

The datatype `bitpix` may be given as either a CFITSIO name or as the corresponding MATLAB datatype.

`'byte_img'`	`'uint8'`
`'short_img'`	`'int16'`
`'long_img'`	`'int32'`
`'longlong_img'`	`'int64'`
`'float_img'`	`'single'`
`'double_img'`	`'double'`

This function corresponds to the `fits_create_imgll (ffcrimll)` function in the CFITSIO library C API.

Examples

Create two images in a new FITS file. There are 100 rows (NAXIS2 keyword) and 200 columns (NAXIS1 keyword) in the first image, and 256 rows (NAXIS2 keyword), 512 columns (NAXIS1 keyword), and 3 planes (NAXIS3 keyword) in the second image.

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'int16',[100 200]);
fits.createImg(fptr,'byte_img',[256 512 3]);
fits.closeFile(fptr);
fitsdisp('myfile.fits');
```

See Also

See Also

`createTbl` | `insertImg` | `readImg` | `setCompressionType` | `writeImg`

matlab.io.fits.getImgSize

Size of image

Syntax

```
imagesize = getImgSize(fptr)
```

Description

`imagesize = getImgSize(fptr)` returns the number of rows and columns of an image. This function corresponds to the `fits_get_img_size (ffgisz)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*;
fptr = fits.openFile('tst0012.fits');
hdus = [1 3 4];
for j = hdus;
    htype = fits.movAbsHDU(fptr,j);
    sz = fits.getImgSize(fptr);
    fprintf('HDU %d:  "%s", [', j, htype);
    for k = 1:numel(sz)
        fprintf(' %d ', sz(k));
    end
    fprintf(']\n');
end
fits.closeFile(fptr);
```

See Also

See Also

`createImg` | `getImgType`

matlab.io.fits.getImgType

Data type of image

Syntax

```
datatype = getImgType(fptr)
```

Description

`datatype = getImgType(fptr)` gets the data type of an image. `datatype` can be one of the following:

```
'BYTE_IMG'
'SHORT_IMG'
'LONG_IMG'
'LONGLONG_IMG'
'FLOAT_IMG'
'DOUBLE_IMG'
```

This function corresponds to the `fits_get_img_type (ffgidt)` function in the CFITSIO library C API.

Examples

```
fptr = fits.openFile('tst0012.fits');
hdus = [1 3 4];
for j = hdus;
    htype = fits.movAbsHDU(fptr,j);
    dtype = fits.getImgType(fptr);
    fprintf('HDU %d:  "%s", "%s"\n', j, htype, dtype);
end
fits.closeFile(fptr);
```

See Also

See Also

`getImgSize`

matlab.io.fits.insertImg

Insert FITS image after current image

Syntax

```
insertImage(fptr,bitpix,naxes)
```

Description

`insertImage(fptr,bitpix,naxes)` inserts a new image extension immediately following the current HDU. If the file has just been created, a new primary array is inserted at the beginning of the file. Any following extensions in the file will be shifted down to make room for the new extension. If the current HDU is the last HDU in the file, then the new image extension will be appended to the end of the file.

This function corresponds to the `fits_insert_imgll (ffiimgll)` function in the CFITSIO library C API.

Examples

Create a 150x300 image between the 1st and 2nd images in a FITS file.

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'byte_img',[100 200]);
fits.createImg(fptr,'byte_img',[200 400]);
fits.movAbsHDU(fptr,1);
fits.insertImg(fptr,'byte_img',[150 300]);
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','min');
```

See Also

See Also

`createImg`

matlab.io.fits.readImg

Read image data

Syntax

```
imgdata = readImg(fptr)
imgdata = readImg(fptr,fpixel,lpixel)
imgdata = readImg(fptr,fpixel,lpixel,inc)
```

Description

`imgdata = readImg(fptr)` reads the entire current image. The number of rows in `imgdata` will correspond to the value of the NAXIS2 keyword, while the number of columns will correspond to the value of the NAXIS1 keyword. Any further dimensions of `imgdata` will correspond to NAXIS3, NAXIS4, and so on.

`imgdata = readImg(fptr,fpixel,lpixel)` reads the subimage defined by pixel coordinates `fpixel` and `lpixel`. The `fpixel` argument is the coordinate of the first pixel and `lpixel` is the coordinate of the last pixel. `fpixel` and `lpixel` are one-based.

`imgdata = readImg(fptr,fpixel,lpixel,inc)` reads the subimage defined by `fpixel`, `lpixel`, and `inc`. The `inc` argument denotes the inter- element spacing along each extent.

This function corresponds to the `fits_read_subset (ffgsv)` function in the CFITSIO library C API.

Examples

Read an entire image.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
data = fits.readImg(fptr);
fits.closeFile(fptr);
```

Read a 70x80 image subset.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
img = fits.readImg(fptr,[11 11],[80 90]);
fits.closeFile(fptr);
```

See Also

See Also

`createImg` | `writeImg`

matlab.io.fits.setBscale

Reset image scaling

Syntax

```
setBscale(fptr,BSCALE,BZERO)
```

Description

`setBscale(fptr,BSCALE,BZERO)` resets the scaling factors in the primary array or image extension according to the equation

```
output = (FITS array) * BSCALE + BZERO
```

The inverse formula is used when writing data values to the FITS file.

This only affects the automatic scaling performed when the data elements are read. It does not change the BSCALE and BZERO keyword values.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.setBscale(fptr,2.0,0.5);
data = fits.readImg(fptr);
fits.closeFile(fptr);
```

See Also

See Also

`readImg`

matlab.io.fits.writeImg

Write to FITS image

Syntax

```
writeImg(fptr,data)
writeImg(fptr,data,fpixel)
```

Description

`writeImg(fptr,data)` writes an entire image to the FITS data array. The number of rows and columns in `data` must equal the values of the NAXIS2 and NAXIS1 keywords, respectively. Any further extents must correspond to the NAXIS3, NAXIS4 ... NAXISn keywords respectively.

`writeImg(fptr,data,fpixel)` writes a subset of an image to the FITS data array. `fpixel` gives the coordinate of the first pixel in the image region.

This function corresponds to the `fits_write_subset (ffpss)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'long_img',[256 512]);
data = reshape(1:256*512,[256 512]);
data = int32(data);
fits.writeImg(fptr,data);
fits.closeFile(fptr);
```

Create an 80x40 `uint8` image and set all but the outermost pixels to 1.

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'uint8',[80 40]);
```

```
data = ones(78,38);
fits.writeImg(fptr,data,[1 1]);
fits.closeFile(fptr);
```

See Also

See Also

`createImg` | `readImg`

matlab.io.fits.deleteKey

Delete key by name

Syntax

```
deleteKey(fptr,keyname)
```

Description

`deleteKey(fptr,keyname)` deletes a keyword by name.

This function corresponds to the `fits_delete_key (ffdrec)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','tst0012.fits');
copyfile(srcFile,'myfile.fits');
fileattrib('myfile.fits','+w');
fprintf('Before key deletion...\n');
fitsdisp('myfile.fits','index',1);
fptr = fits.openFile('myfile.fits','readwrite');
fits.deleteKey(fptr,'DATE');
fits.closeFile(fptr);
fprintf('\n\n\nAfter key deletion...\n');
fitsdisp('myfile.fits','index',1);
```

See Also

See Also

`deleteRecord` | `writeKey`

matlab.io.fits.deleteRecord

Delete key by record number

Syntax

```
deleteRecord(fptr,keynum)
```

Description

`deleteRecord(fptr,keynum)` deletes a keyword by record number.

This function corresponds to the `fits_delete_record (ffdrec)` function in the CFITSIO library C API.

Examples

Delete the 18th keyword ("ORIGIN") in a primary array.

```
import matlab.io.*
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','tst0012.fits');
copyfile(srcFile,'myfile.fits');
fileattrib('myfile.fits','+w');
fptr = fits.openFile('myfile.fits','readwrite');
card = fits.readRecord(fptr,18);
fits.deleteRecord(fptr,18);
fits.closeFile(fptr);
```

See Also

See Also

`deleteKey` | `readRecord`

matlab.io.fits.getHdrSpace

Number of keywords in header

Syntax

```
[nkeys,morekeys] = fits.getHdrSpace(fptr)
```

Description

`[nkeys,morekeys] = fits.getHdrSpace(fptr)` returns the number of existing keywords (not counting the END keyword) and the amount of space currently available for more keywords. It returns `morekeys = -1` if the header has not yet been closed. Note that the CFITSIO library will dynamically add space if required when writing new keywords to a header so in practice there is no limit to the number of keywords that can be added to a header.

This function corresponds to the `fits_get_hdrspace (ffghsp)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
[nkeys,morekeys] = fits.getHdrSpace(fptr);
fits.closeFile(fptr);
```

matlab.io.fits.readCard

Header record of keyword

Syntax

```
card = readCard(fptr,keyname)
```

Description

`card = readCard(fptr,keyname)` returns the entire 80-character header record of the keyword, with any trailing blank characters stripped off.

This function corresponds to the `fits_read_card (ffgcrd)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
n = fits.getNumHDUs(fptr);
for j = 1:n
    fits.movAbsHDU(fptr,j);
    card = fits.readCard(fptr,'NAXIS');
    fprintf('HDU %d:  ''%s''\n', j, card);
end
fits.closeFile(fptr);
```

See Also

See Also

`readKey` | `readRecord`

matlab.io.fits.readKey

Keyword

Syntax

```
[value,comment] = readKey(fptr,keyname)
```

Description

`[value,comment] = readKey(fptr,keyname)` returns the specified key and comment. `value` and `comment` are returned as character vectors.

This function corresponds to the `fits_read_key_str (ffgkys)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
n = fits.getNumHDUs(fptr);
for j = 1:n
    fits.movAbsHDU(fptr,j);
    [key,comment] = fits.readKey(fptr,'NAXIS');
    fprintf('HDU %d:  NAXIS %s, "%s"\n', j, key, comment);
end
fits.closeFile(fptr);
```

See Also

See Also

`readKeyCmplx` | `readKeyDbl` | `readKeyLongLong`

matlab.io.fits.readKeyCmplx

Keyword as complex scalar value

Syntax

```
[value,comment] = readKeyCmplx(fptr,keyname)
```

Description

`[value,comment] = readKeyCmplx(fptr,keyname)` returns the specified key and comment. `value` is returned as a double precision complex scalar value.

This function corresponds to the `fits_read_key_dblcmp" (ffgkym)` function in the CFITSIO library C API.

See Also

See Also

`readKey` | `readKeyDbl` | `readKeyLongLong`

matlab.io.fits.readKeyDbl

Keyword as double precision value

Syntax

```
[value,comment] = readKeyDbl(fptr,keyname)
```

Description

`[value,comment] = readKeyDbl(fptr,keyname)` returns the specified key and comment.

This function corresponds to the `fits_read_key_dbl (ffgkyd)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
n = fits.getNumHDUs(fptr);
for j = 1:n
    fits.movAbsHDU(fptr,j);
    [key,comment] = fits.readKeyDbl(fptr,'NAXIS');
    fprintf('HDU %d:  NAXIS %s, "%s"\n', j, key, comment);
end
fits.closeFile(fptr);
```

See Also

See Also

`readKey` | `readKeyCmplx` | `readKeyLongLong`

matlab.io.fits.readKeyLongLong

Keyword as `int64`

Syntax

```
[value,comment] = readKeyLongLong(fptr,keyname)
```

Description

`[value,comment] = readKeyLongLong(fptr,keyname)` returns the specified key and comment. `value` is returned an `int64` scalar value.

This function corresponds to the `fits_read_key_lnglng (ffgkyjj)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
n = fits.getNumHDUs(fptr);
for j = 1:n
    fits.movAbsHDU(fptr,j);
    [key,comment] = fits.readKeyLongLong(fptr,'NAXIS');
    fprintf('HDU %d:  NAXIS %d, "%s"\n', j, key, comment);
end
fits.closeFile(fptr);
```

See Also

See Also

`readKey` | `readKeyCmplx` | `readKeyDbl`

matlab.io.fits.readKeyLongStr

Long string value

Syntax

```
[value,comment] = readKeyLongStr(fptr,keyname)
```

Description

`[value,comment] = readKeyLongStr(fptr,keyname)` returns the specified long string value and comment as character vectors.

This function corresponds to the `fits_read_key_longstr (ffgkls)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
idata = repmat(char(97:106),1,10);
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'byte_img',[100 200]);
fits.writeKey(fptr,'mykey',idata);
odata1 = fits.readKey(fptr,'mykey');
odata2 = fits.readKeyLongStr(fptr,'mykey');
fits.closeFile(fptr);
```

See Also

See Also

`readKey`

matlab.io.fits.readKeyUnit

Physical units string from keyword

Syntax

```
units = readKeyUnit(fptr,keyname)
```

Description

`units = readKeyUnit(fptr,keyname)` returns the physical units string from an existing keyword. If no units are defined, `units` is returned as an empty character vector.

This function corresponds to the `fits_read_key_unit" (ffgunt)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'long_img',[10 20]);
fits.writeKey(fptr,'VELOCITY',12.3,'orbital speed');
fits.writeKeyUnit(fptr,'VELOCITY','km/s');
units = fits.readKeyUnit(fptr,'VELOCITY');
fits.closeFile(fptr);
```

See Also

See Also

`readKey` | `writeKeyUnit`

matlab.io.fits.readRecord

Header record specified by number

Syntax

```
card = readRecord(fptr,keynum)
```

Description

`card = readRecord(fptr,keynum)` returns the entire 80-character header record identified by the numeric `keynum`. Trailing blanks are truncated.

This function corresponds to the `fits_read_record (ffgrec)` function in the CFITSIO library C API.

Examples

Read the second record in each HDU.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
n = fits.getHdrSpace(fptr);
for j = 1:n
    card = fits.readRecord(fptr,j);
    fprintf('record %d:  "%s"\n', j, card);
end
fits.closeFile(fptr);
```

See Also

See Also

`deleteRecord` | `readCard` | `readKey`

matlab.io.fits.writeComment

Write or append COMMENT keyword to CHU

Syntax

```
writeComment(fptr,comment)
```

Description

`writeComment(fptr,comment)` writes (appends) a COMMENT keyword to the CHU. The comment keyword, specified as a character vector, will be continued over multiple keywords if it is longer than 70 characters.

This function corresponds to the `fits_write_comment (ffpcom)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'byte_img',[100 200]);
fits.writeComment(fptr,'this is a comment');
fits.writeComment(fptr,'this is another comment');
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','full');
```

See Also

See Also

`writeDate` | `writeHistory`

matlab.io.fits.writeDate

Write DATE keyword to CHU

Syntax

```
writeDate(FPTR)
```

Description

`writeDate(FPTR)` writes the DATE keyword to the CHU.

This function corresponds to the `fits_write_date (ffpdat)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'byte_img',[100 200]);
fits.writeDate(fptr);
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','full');
```

See Also

See Also

`writeComment` | `writeHistory`

matlab.io.fits.writeKey

Update or add new keyword into current HDU

Syntax

```
writeKey(fptr,keyname,value,comment)
writeKey(fptr,keyname,value,comment,decimals)
```

Description

`writeKey(fptr,keyname,value,comment)` adds a new record in the current HDU, or updates it if it already exists. `comment` is optional.

`writeKey(fptr,keyname,value,comment,decimals)` adds a new floating point keyword in the current HDU, or updates it if it already exists. You must use this syntax to write a keyword with imaginary components. `decimals` is ignored otherwise.

If a character `value` exceeds 68 characters in length, the LONGWARN convention is automatically employed.

This function corresponds to the `fits_write_key (ffpky)` and `fits_update_key (ffuky)` family of functions in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'byte_img',[100 200]);
fits.writeKey(fptr,'mykey1','a char value','with a comment');
fits.writeKey(fptr,'mykey2',int32(1));
fits.writeKey(fptr,'mykey3',5+7*j,'with another comment');
fits.writeKey(fptr,'mykey4',4/3,'with yet another comment',2);
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','full');
```

See Also

See Also

`deleteKey` | `readKey` | `readRecord`

matlab.io.fits.writeKeyUnit

Write physical units string

Syntax

```
writeKeyUnit(fptr,keyname,unit)
```

Description

`writeKeyUnit(fptr,keyname,unit)` writes a physical units string into an existing keyword. `fptr` is created using the `fits.createFile` function. `keyname` and `unit` are specified as character vectors.

This function corresponds to the `fits_write_key_unit (ffpunt)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myFitsFile.fits');
fits.createImg(fptr,'long_img',[10 20]);
fits.writeKey(fptr,'VELOCITY',12.3,'orbital speed');
fits.writeKeyUnit(fptr,'VELOCITY','km/s');
fits.closeFile(fptr);
```

See Also

See Also

`readKeyUnit`

matlab.io.fits.writeHistory

Write or append HISTORY keyword to CHU

Syntax

```
writeHistory(fptr,history)
```

Description

`writeHistory(fptr,history)` writes (appends) a HISTORY keyword to the CHU. The history keyword, specified as a character vector, is continued over multiple keywords if it is longer than 70 characters.

This function corresponds to the `fits_write_history (ffphis)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'byte_img',[100 200]);
fits.writeHistory(fptr,'this is a history keyword');
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','full');
```

See Also

See Also

`writeComment` | `writeDate`

matlab.io.fits.copyHDU

Copy current HDU from one file to another

Syntax

```
copyHDU(infptr,outfptr)
```

Description

`copyHDU(infptr,outfptr)` copies the current HDU from the FITS file associated with `infptr` and appends it to the end of the FITS file associated with `outfptr`.

This function corresponds to the `fits_copy_hdu (ffcopy)` function in the CFITSIO library C API.

Examples

Copy the first, third, and fifth HDUs from one file to another.

```
import matlab.io.*
infptr = fits.openFile('tst0012.fits');
outfptr = fits.createFile('myfile.fits');
fits.copyHDU(infptr,outfptr);
fits.movAbsHDU(infptr,3);
fits.copyHDU(infptr,outfptr);
fits.movAbsHDU(infptr,5);
fits.copyHDU(infptr,outfptr);
fits.closeFile(infptr);
fits.closeFile(outfptr);
fitsdisp('tst0012.fits','mode','min','index',[1 3 5]);
fitsdisp('myfile.fits','mode','min');
```

See Also

See Also

`deleteHDU`

matlab.io.fits.deleteHDU

Delete current HDU in FITS file

Syntax

```
HDU_TYPE = deleteHDU(fptr)
```

Description

`HDU_TYPE = deleteHDU(fptr)` deletes the current HDU in the FITS file. Any following HDUs will be shifted forward in the file, filling the gap created by the deleted HDU. In the case of deleting the primary array (the first HDU in the file) then the current primary array will be replaced by a null primary array containing the minimum set of required keywords and no data. If there are more HDUs in the file following the HDU being deleted, then the current HDU will be redefined to point to the following HDU. If there are no following HDUs then the current HDU will be redefined to point to the previous HDU. `HDU_TYPE` returns the type of the new current HDU.

This function corresponds to the `fits_delete_hdu (ffdhdu)` function in the CFITSIO library C API.

Examples

Delete the second HDU in a FITS file.

```
import matlab.io.*
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','tst0012.fits');
copyfile(srcFile,'myfile.fits');
fileattrib('myfile.fits','+w');
fitsdisp('myfile.fits','mode','min');
fptr = fits.openFile('myfile.fits','readwrite');
fits.movAbsHDU(fptr,2);
new_current_hdu = fits.deleteHDU(fptr);
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','min');
```

See Also

See Also

`copyHDU`

matlab.io.fits.getHDUnum

Number of current HDU in FITS file

Syntax

```
N = getHDUnum(fptr)
```

Description

`N = getHDUnum(fptr)` returns the number of the current HDU in the FITS file. The primary array has HDU number 1.

This function corresponds to the `fits_get_hdu_num (ffghdn)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
n = fits.getHDUnum(fptr);
fits.closeFile(fptr);
```

See Also

See Also

`getHDUtype` | `getNumHDUs`

matlab.io.fits.getHDUtype

Type of current HDU

Syntax

```
htype = getHDUtype(fptr)
```

Description

`htype = getHDUtype(fptr)` returns the type of the current HDU in the FITS file. The possible values for `htype` are:

```
'IMAGE_HDU'
'ASCII_TBL'
'BINARY_TBL'
```

This function corresponds to the `fits_get_hdu_type (ffghdt)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
n = fits.getNumHDUs(fptr);
for j = 1:n
    fits.getHDUtype(fptr);
end
fits.closeFile(fptr);
```

See Also

See Also

`getHDUnum`

matlab.io.fits.getNumHDUs

Total number of HDUs in FITS file

Syntax

```
N = getNumHDUs(fptr)
```

Description

`N = getNumHDUs(fptr)` returns the number of completely defined HDUs in a FITS file. If a new HDU has just been added to the FITS file, then that last HDU will only be counted if it has been closed, or if data has been written to the HDU. The current HDU remains unchanged by this routine.

This function corresponds to the `fits_get_num_hdus (ffthdu)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
n = fits.getNumHDUs(fptr);
fits.closeFile(fptr);
```

See Also

See Also

`getHDUnum`

matlab.io.fits.movAbsHDU

Move to absolute HDU number

Syntax

```
htype = fits.movAbsHDU(fptr,HDUNUM)
```

Description

`htype = fits.movAbsHDU(fptr,HDUNUM)` moves to a specified absolute HDU number (starting with 1 for the primary array) in the FITS file. The possible values for `htype` are:

`'IMAGE_HDU'`

`'ASCII_TBL'`

`'BINARY_TBL'`

This function corresponds to the `fits_move_abs_hdu` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
n = fits.getNumHDUs(fptr);
for j = 1:n
    htype = fits.movAbsHDU(fptr,j);
    fprintf('HDU %d:  "%s"\n',j,htype);
end
fits.closeFile(fptr);
```

See Also

See Also

`getNumHDUs` | `movNamHDU` | `movRelHDU`

matlab.io.fits.movNamHDU

Move to first HDU having specific type and keyword values

Syntax

```
movNamHDU(fptr,hdutype,EXTNAME,EXTVER)
```

Description

`movNamHDU(fptr,hdutype,EXTNAME,EXTVER)` moves to the first HDU which has the specified extension type and `EXTNAME` and `EXTVER` keyword values (or `HDUNAME` and `HDUVER` keywords).

The `hdutype` parameter may have a value of:

```
'IMAGE_HDU'
'ASCII_TBL'
'BINARY_TBL'
'ANY_HDU'
```

If `hdutype` is `'ANY_HDU'`, only the `EXTNAME` and `EXTVER` values are used to locate the correct extension. If the input value of `EXTVER` is 0, then the `EXTVER` keyword is ignored and the first HDU with a matching `EXTNAME` (or `HDUNAME`) keyword will be found.

This function corresponds to the `fits_movnam_hdu (ffmnhd)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movNamHDU(fptr,'IMAGE_HDU','quality',1);
fits.closeFile(fptr);
```

See Also

See Also

`movAbsHDU` | `movRelHDU`

matlab.io.fits.movRelHDU

Move relative number of HDUs from current HDU

Syntax

```
htype = moveRelHDU(fptr,nmove)
```

Description

`htype = moveRelHDU(fptr,nmove)` moves a relative number of HDUs forward or backward from the current HDU and returns the HDU type, `htype`, of the resulting HDU. The possible values for `htype` are:

```
'IMAGE_HDU'
'ASCII_TBL'
'BINARY_TBL'
```

This function corresponds to the `fits_movrel_hdu (ffmrhd)` function in the CFITSIO library C API.

Examples

Move through each HDU in succession, then move backwards twice by two HDUs.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
n = fits.getNumHDUs(fptr);
for j = 1:n
    htype = fits.movAbsHDU(fptr,j);
    fprintf('HDU %d:  "%s"\n',j,htype);
end
htype = fits.movRelHDU(fptr,-2);
n = fits.getHDUnum(fptr);
fprintf('HDU %d:  "%s"\n',n,htype);
htype = fits.movRelHDU(fptr,-2);
```

```
n = fits.getHDUnum(fptr);
fprintf('HDU %d:  "%s"\n',n,htype);
fits.closeFile(fptr);
```

See Also

See Also

movAbsHDU | movNamHDU

matlab.io.fits.writeChecksum

Compute and write checksum for current HDU

Syntax

```
writeChecksum(fptr)
```

Description

`writeChecksum(fptr)` computes and writes the `DATASUM` and `CHECKSUM` keyword values for the current HDU into the current header. If the keywords already exist, their values are updated only if necessary (for example, if the file has been modified since the original keyword values were computed).

This function corresponds to the `fits_write_chksum (ffpcks)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'long_img',[10 20]);
fits.writeChecksum(fptr)
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','full');
```

See Also

See Also

`fitsdisp`

matlab.io.fits.imgCompress

Compress HDU from one file into another

Syntax

```
imgCompress(infptr,outfptr)
```

Description

`imgCompress(infptr,outfptr)` initializes the output HDU, copies all the keywords, and loops through the input image, compressing the data and writing the compressed data to the output HDU.

This function corresponds to the `fits_img_compress` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
infptr = fits.openFile('tst0012.fits');
outfptr = fits.createFile('myfile.fits');
fits.setCompressionType(outfptr,'rice');
fits.imgCompress(infptr,outfptr);
fits.closeFile(infptr);
fits.closeFile(outfptr);
```

See Also

See Also

`setCompressionType`

matlab.io.fits.isCompressedImg

Determine if current image is compressed

Syntax

```
TF = isCompressedImg(fptr)
```

Description

`TF = isCompressedImg(fptr)` returns true if the image in the current HDU is compressed.

This function corresponds to the `fits_is_compressed_image` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
bool = fits.isCompressedImg(fptr);
fits.closeFile(fptr);
```

See Also

See Also

`setCompressionType`

matlab.io.fits.setCompressionType

Set image compression type

Syntax

```
setCompressionType(fptr,comptype)
```

Description

`setCompressionType(fptr,comptype)` specifies the image compression algorithm that should be used when writing a FITS image.

Supported values for `comptype` include:

```
'GZIP'
'GZIP2'
'RICE'
'PLIO'
'HCOMPRESS'
'NOCOMPRESS'
```

This function corresponds to the `fits_set_compression_type` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.setCompressionType(fptr,'GZIP2');
fits.createImg(fptr,'long_img',[256 512]);
data = reshape(1:256*512,[256 512]);
data = int32(data);
fits.writeImg(fptr,data);
fits.closeFile(fptr);
```

```
fitsdisp('myfile.fits','mode','full');
```

See Also

See Also

`createImg` | `setTileDim`

matlab.io.fits.setHCompScale

Set scale parameter for HCOMPRESS algorithm

Syntax

```
setHCompScale(fptr,scale)
```

Description

`setHCompScale(fptr,scale)` sets the scale parameter to be used with the HCOMPRESS compression algorithm. Setting the scale parameter causes the algorithm to operate in lossy mode.

This function corresponds to the `fits_set_hcomp_scale` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
data = 50*ones(256,512,'double') + 10 * rand([256 512]);
fptr = fits.createFile('myfile.fits');
fits.setCompressionType(fptr,'HCOMPRESS_1');
fits.setHCompScale(fptr,2.5);
fits.createImg(fptr,'double_img',[256 512]);
fits.writeImg(fptr,data);
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','full');
```

See Also

See Also

`setCompressionType` | `setHCompSmooth`

matlab.io.fits.setHCompSmooth

Set smoothing for images compressed with HCOMPRESS

Syntax

```
setHCompSmooth(fptr,smooth)
```

Description

`setHCompSmooth(fptr,smooth)` sets the smoothing to be used when compressing an image with the HCOMPRESS algorithm. Setting either the scale or smoothing parameter causes the algorithm to operate in lossy mode.

This function corresponds to the `fits_set_hcomp_smooth` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
data = int32(50*ones(256,512,'double') + 10 * rand([256 512]));
fptr = fits.createFile('myfile.fits');
fits.setCompressionType(fptr,'HCOMPRESS');
fits.setHCompSmooth(fptr,1);
fits.createImg(fptr,'long_img',[256 512]);
fits.writeImg(fptr,data);
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','full');
```

See Also

See Also

`setCompressionType` | `setHCompScale`

matlab.io.fits.setTileDim

Set tile dimensions

Syntax

```
fits.setTileDim(fptr,tiledims)
```

Description

`fits.setTileDim(fptr,tiledims)` specifies the size of the image compression tiles to be used when creating a compressed image.

This function corresponds to the `fits_set_tile_dim` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.setCompressionType(fptr,'RICE_1');
fits.setTileDim(fptr,[64 128]);
fits.createImg(fptr,'byte_img',[256 512]);
data = ones(256,512,'uint8');
fits.writeImg(fptr,data);
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','full');
```

See Also

See Also

`setCompressionType`

matlab.io.fits.createTbl

Create new ASCII or binary table extension

Syntax

```
fptr = createTbl(fptr,tbltype,nrows,ttype,tform,tunit,extname)
```

Description

`fptr = createTbl(fptr,tbltype,nrows,ttype,tform,tunit,extname)` creates a new ASCII or bintable table extension. `ttype` must be either `'binary'` or `'ascii'`. The `nrows` argument gives the initial number of rows to be created in the table and should normally be zero. `tunit` specifies the units for each column, but can be an empty cell array if no units are desired. `extname` specifies the extension name, but can be omitted.

`tform` specifies the format of the column. For binary tables, the values should be in the form of `'rt'`, where `'r'` is the repeat count and `'t'` is one of the following letters.

`'A'`	ASCII character
`'B'`	Byte or `uint8`
`'C'`	Complex (single precision)
`'D'`	Double precision
`'E'`	Single precision
`'I'`	`int16`
`'J'`	`int32`
`'K'`	`int64`
`'L'`	Logical
`'M'`	Complex (double precision)
`'X'`	Bit (`int8` zeros and ones)

A column can also be specified as having variable-width if the `tform` value has the form `'1Pt'` or `'1Qt'`, where `'t'` specifies the data type as above.

For ASCII tables, the `tform` values take the form:

Iw	`int16` column with width `'w'`
Aw	ASCII column with width `'w'`
Fww.dd	Fixed point
Eww.dd	Single precision with width `'ww'` and precision `'dd'`
Dww.dd	Double precision with width `'ww'` and precision `'dd'`

This function corresponds to the `fits_create_tbl (ffcrtb)` function in the CFITSIO library C API.

Examples

Create a binary table. The first column contains strings of nine characters each. The second column contains four-element sequences of bits. The third column contains three-element sequences of `uint8` values. The fourth column contains double-precision scalars.

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
ttype = {'Col1','Col2','Col3','Col4'};
tform = {'9A','4X','3B','1D'};
tunit = {'m/s','kg','kg/m^3','candela'};
fits.createTbl(fptr,'binary',10,ttype,tform,tunit,'my-table');
fits.closeFile(fptr);
fitsdisp('myfile.fits');
```

Create a two-column table where the first column has a single double-precision value, but the second column has a variable-length double-precision value.

```
import matlab.io.*
fptr = fits.createFile('myfile2.fits');
ttype = {'Col1','Col2'};
tform = {'1D','1PD'};
fits.createTbl(fptr,'binary',0,ttype,tform);
fits.closeFile(fptr);
fitsdisp('myfile2.fits');
```

See Also

See Also

`createImg` | `insertATbl` | `insertBTbl` | `readCol` | `writeCol`

matlab.io.fits.deleteCol

Delete column from table

Syntax

```
deleteCol(fptr,colnum)
```

Description

`deleteCol(fptr,colnum)` deletes the column from an ASCII or binary table.

This function corresponds to the `fits_delete_col (ffdcol)` function in the CFITSIO library C API.

Examples

Delete the second column in a binary table.

```
import matlab.io.*
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','tst0012.fits');
copyfile(srcFile,'myfile.fits');
fileattrib('myfile.fits','+w');
fprintf('Before:  '); fitsdisp('myfile.fits','index',2,'mode','min');
fptr = fits.openFile('myfile.fits','readwrite');
fits.movAbsHDU(fptr,2);
fits.deleteCol(fptr,2);
fits.closeFile(fptr);
fprintf('After :  '); fitsdisp('myfile.fits','index',2,'mode','min');
```

See Also

See Also

`deleteRows`

matlab.io.fits.deleteRows

Delete rows from table

Syntax

```
deleteRows(fptr,firstrow,nrows)
```

Description

`deleteRows(fptr,firstrow,nrows)` deletes rows from an ASCII or binary table.

This function corresponds to the `fits_delete_rows (ffdrow)` function in the CFITSIO library C API.

Examples

Delete the second, third, and fourth rows in a binary table (second HDU).

```
import matlab.io.*
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','tst0012.fits');
copyfile(srcFile,'myfile.fits');
fileattrib('myfile.fits','+w');
fprintf('Before:  '); fitsdisp('myfile.fits','index',2,'mode','min');
fptr = fits.openFile('myfile.fits','readwrite');
fits.movAbsHDU(fptr,2);
fits.deleteRows(fptr,2,2);
fits.closeFile(fptr);
fprintf('After :  '); fitsdisp('myfile.fits','index',2,'mode','min');
```

See Also

See Also

`deleteCol` | `insertRows`

matlab.io.fits.insertRows

Insert rows into table

Syntax

```
insertRows(fptr,firstrow,nrows)
```

Description

`insertRows(fptr,firstrow,nrows)` inserts rows into an ASCII or binary table. `firstrow` is a one-based number.

This function corresponds to the `fits_insert_rows (ffirow)` function in the CFITSIO library C API.

Examples

Insert five rows into an empty table.

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
ttype = {'Col1','Col2'};
tform = {'3A','1D'};
tunit = {'m/s','candela'};
fits.createTbl(fptr,'binary',0,ttype,tform,tunit,'my-table');
fits.insertRows(fptr,1,5);
fits.closeFile(fptr);
fitsdisp('myfile.fits','index',2);
```

See Also

See Also

`deleteRows` | `insertCol`

matlab.io.fits.getAColParms

ASCII table information

Syntax

```
[ttype,tbcol,tunit,tform,scale,zero,nulstr,tdisp] =
getAColParms(fptr,colnum)
```

Description

`[ttype,tbcol,tunit,tform,scale,zero,nulstr,tdisp] = getAColParms(fptr,colnum)` gets information about an existing ASCII table column.

This function corresponds to the `fits_get_acolparms (fffacl)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,5);
[ttype,tbcol,tunit,tform,scale,zero,nulstr,tdisp] = fits.getAColParms(fptr,2);
fits.closeFile(fptr);
```

See Also

See Also

`getBColParms`

matlab.io.fits.getBColParms

Binary table information

Syntax

```
[ttype,tunit,typechar,repeat,scale,zero,nulval,tdisp] =
getBColParms(fptr,colnum)
```

Description

`[ttype,tunit,typechar,repeat,scale,zero,nulval,tdisp] = getBColParms(fptr,colnum)` gets information about an existing binary table column.

This function corresponds to the `fits_get_bcolparms (ffgbcl)` function in the CFITSIO library C API.

Examples

Get information about the second column in a binary table.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,2);
[ttype,tunit,typechar,repeat,scale,zero,nulval,tdisp]= fits.getBColParms(fptr,2);
fits.closeFile(fptr);
```

See Also

See Also

`getAColParms`

matlab.io.fits.getColName

Table column name

Syntax

```
[colnum,colname] = getColNum(fptr,templt,casesen)
```

Description

`[colnum,colname] = getColNum(fptr,templt,casesen)` gets the table column numbers and names of the columns whose names match an input template name. If `casesen` is true, then the column name match is case-sensitive. `casesen` defaults to false.

The input column name template may be either the exact name of the column to be searched for, or it may contain wildcard characters (*, ?, or #), or it may contain the integer number of the desired column (with the first column = 1). The `'*'` wildcard character matches any sequence of characters (including zero characters) and the `'?'` character matches any single character. The # wildcard matches any sequence of consecutive decimal digit characters (0-9).

Examples

Return all the columns starting with the letter `'C'`.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,2);
[nums,names] = fits.getColName(fptr,'C*');
fits.closeFile(fptr);
```

See Also

See Also

`getAColParms` | `getBColParms`

matlab.io.fits.getColType

Scaled column data type, repeat value, width

Syntax

```
[dtype,repeat,width] = getColType(fptr,colnum)
```

Description

`[dtype,repeat,width] = getColType(fptr,colnum)` returns the data type, vector repeat value, and the width in bytes of a column in an ASCII or binary table.

This function corresponds to the `fits_get_coltypell (ffgtclll)` function in the CFITSIO library C API.

Examples

Get information about the 'FLUX' column in the second HDU.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,2);
[dtype,repeat,width] = fits.getColType(fptr,5);
fits.closeFile(fptr);
```

See Also

See Also

`getEqColType`

matlab.io.fits.getEqColType

Column data type, repeat value, width

Syntax

```
[dtype,repeat,width] = getColType(fptr,colnum)
```

Description

`[dtype,repeat,width] = getColType(fptr,colnum)` returns the scaled data type needed to store the scaled column data type, the vector repeat value, and the width in bytes of a column in an ASCII or binary table.

This function corresponds to the `fits_get_eqcoltypell (ffeqtyll)` function in the CFITSIO library C API.

Examples

Get information about the 'FLUX' column in the second HDU.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,2);
[dtype,repeat,width] = fits.getEqColType(fptr,5);
fits.closeFile(fptr);
```

See Also

See Also

`getColType`

matlab.io.fits.getNumCols

Number of columns in table

Syntax

```
ncols = getNumCols(fptr)
```

Description

`ncols = getNumCols(fptr)` gets the number of columns in the current FITS table. This function corresponds to the `fits_get_num_cols (ffgncl)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,2);
ncols = fits.getNumCols(fptr);
nrows = fits.getNumRows(fptr);
fits.closeFile(fptr);
```

See Also

See Also

`getNumRows`

matlab.io.fits.getNumRows

Number of rows in table

Syntax

```
nrows = getNumRows(fptr)
```

Description

`nrows = getNumRows(fptr)` gets the number of rows in the current FITS table. This function corresponds to the `fits_get_num_rowsll` (ffgnrwll) function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,2);
ncols = fits.getNumCols(fptr);
nrows = fits.getNumRows(fptr);
fits.closeFile(fptr);
```

See Also

See Also

`getNumCols`

matlab.io.fits.insertCol

Insert column into table

Syntax

```
insertCol(fptr,colnum,ttype,tform)
```

Description

`insertCol(fptr,colnum,ttype,tform)` inserts a column into an ASCII or binary table.

This function corresponds to the `fits_insert_col (fficol)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
ttype = {'Col1','Col2'};
tform = {'3A','1D'};
tunit = {'m/s','candela'};
fits.createTbl(fptr,'binary',0,ttype,tform,tunit,'my-table');
fits.insertCol(fptr,3,'Col3','3D');
fits.closeFile(fptr);
fitsdisp('myfile.fits','index',2);
```

See Also

See Also

`insertRows`

matlab.io.fits.insertATbl

Insert ASCII table after current HDU

Syntax

```
insertATbl(fptr,rowlen,nrows,ttype,tbcol,tform,tunit,extname)
```

Description

`insertATbl(fptr,rowlen,nrows,ttype,tbcol,tform,tunit,extname)` inserts a new ASCII table extension immediately following the current HDU. Any following extensions are shifted down to make room for the new extension. If there are no other following extensions, then the new table extension is simply appended to the end of the file. If the FITS file is currently empty then this routine creates a dummy primary array before appending the table to it. The new extension becomes the current HDU. If `rowlen` is 0, then CFITSIO calculates the default `rowlen` based on the `tbcol` and `ttype` values.

`tform` can take the following forms. In each case, `'w'` and `'ww'` represent the widths of the ASCII columns.

Iw	`int16` column
Aw	ASCII column
Fww.dd	Fixed point with `'dd'` digits after the decimal point
Eww.dd	Single precision with `'dd'` digits of precision
Dww.dd	Double precision with `'dd'` digits of precision

Binary tables are recommended instead of ASCII tables.

This function corresponds to the `fits_insert_atbl (ffitab)` function in the CFITSIO library C API.

Examples

Create an ASCII table between two images.

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
fits.createImg(fptr,'uint8',[20 30]);
fits.createImg(fptr,'int16',[30 40]);
fits.movRelHDU(fptr,-1);
ttype = {'Name','Short','Fix','Double'};
tbcol = [1 17 28 43];
tform = {'A15','I10','F14.2','D12.4'};
tunit = {'','m**2','cm','km/s'};
fits.insertATbl(fptr,0,0,ttype,tbcol,tform,tunit,'my-table');
fits.writeCol(fptr,1,1,char('abracadabra','hocus-pocus'));
fits.writeCol(fptr,2,1,int16([0; 1]));
fits.writeCol(fptr,3,1,[12.4; 4/3]);
fits.writeCol(fptr,4,1,[12.4; 4e8/3]);
fits.closeFile(fptr);
fitsdisp('myfile.fits','mode','min');
```

See Also

See Also

`createTbl` | `insertBTbl`

matlab.io.fits.insertBTbl

Insert binary table after current HDU

Syntax

```
insertBTbl(fptr,nrows,ttype,tform,tunit,extname,pcount)
```

Description

`insertBTbl(fptr,nrows,ttype,tform,tunit,extname,pcount)` inserts a new binary table extension immediately following the current HDU. Any following extensions are shifted down to make room for the new extension. If there are no other following extensions then the new table extension is simply appended to the end of the file. If the FITS file is currently empty then this routine creates a dummy primary array before appending the table to it. The new extension becomes the CHDU. If there are following extensions in the file and if the table contains variable-length array columns then `pcount` must specify the expected final size of the data heap. Otherwise, `pcount` must be zero.

This function corresponds to the `fits_insert_btbl (ffibin)` function in the CFITSIO library C API.

Examples

Create a table following the primary array. Then, insert a new table just before it.

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
ttype = {'Col1','Col2'};
tform = {'9A','1D'};
tunit = {'m/s','candela'};
fits.createTbl(fptr,'binary',10,ttype,tform,tunit,'my-table');
fits.movRelHDU(fptr,-1);
fits.insertBTbl(fptr,5,ttype,tform,tunit,'my-new-table',0);
fits.closeFile(fptr);
fitsdisp('myfile.fits');
```

See Also

See Also

`createTbl` | `insertATbl`

matlab.io.fits.readATblHdr

Read header information from current ASCII table

Syntax

```
[rowlen,nrows,ttype,tbcol,tform,tunit,extname] = readATblHdr(fptr)
```

Description

`[rowlen,nrows,ttype,tbcol,tform,tunit,extname] = readATblHdr(fptr)` reads header information for the current ASCII table.

This function corresponds to the `fits_read_atblhdrll (ffghtbll)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,5);
[rowlen,nrows,ttype,tbcol,tform,tunit,extname] = fits.readATblHdr(fptr);
fits.closeFile(fptr);
```

See Also

See Also

`readBTblHdr`

matlab.io.fits.readBTblHdr

Read header information from current binary table

Syntax

```
[nrows,ttype,tform,tunit,extname,pcount] = readBTblHdr(fptr)
```

Description

`[nrows,ttype,tform,tunit,extname,pcount] = readBTblHdr(fptr)` reads header information for the current binary table.

This function corresponds to the `fits_read_btblhdrll (ffghbnll)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,2);
[nrows,ttype,tform,tunit,extname,pcount] = fits.readBTblHdr(fptr);
fits.closeFile(fptr);
```

See Also

See Also

`readATblHdr`

matlab.io.fits.readCol

Read rows of ASCII or binary table column

Syntax

```
[coldata,nullval] = readCol(fptr,colnum)
[coldata,nullval] = readCol(fptr,colnum,firstrow,numrows)
```

Description

`[coldata,nullval] = readCol(fptr,colnum)` reads an entire column from an ASCII or binary table column. `nullval` is a logical array specifying if a particular element of `coldata` should be treated as undefined. It is the same size as `coldata`.

`[coldata,nullval] = readCol(fptr,colnum,firstrow,numrows)` reads a subsection of rows from an ASCII or binary table column.

The MATLAB data type returned by `readCol` corresponds to the data type returned by `getEqColType`.

This function corresponds to the `fits_read_col (ffgcv)` function in the CFITSIO library C API.

Examples

Read an entire column.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,2);
colnum = fits.getColName(fptr,'flux');
fluxdata = fits.readCol(fptr,colnum);
fits.closeFile(fptr);
```

Read the first five rows in a column.

```
import matlab.io.*
```

```
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,2);
colnum = fits.getColName(fptr,'flux');
fluxdata = fits.readCol(fptr,colnum,1,5);
fits.closeFile(fptr);
```

See Also

See Also

writeCol

matlab.io.fits.setTscale

Reset image scaling

Syntax

```
setTscale(fptr,colnum,tscale,tzero)
```

Description

`setTscale(fptr,colnum,tscale,tzero)` resets the scaling factors for a table column according to the equation:

```
output = (FITS array) * tscale + tzero
```

The inverse formula is used when writing data values to the FITS file.

This only affects the automatic scaling performed when the data elements are read. It does not change the `tscale` and `tzero` keyword values.

Examples

Turn off automatic scaling in a table column where the `tscale` and `tzero` keywords are present.

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
fits.movAbsHDU(fptr,2);
scaled_data = fits.readCol(fptr,3);
fits.setTscale(fptr,3,1.0,0.0);
unscaled_data = fits.readCol(fptr,3);
fits.closeFile(fptr);
```

See Also

See Also

`readImg`

matlab.io.fits.writeCol

Write elements into ASCII or binary table column

Syntax

```
writeCol(fptr,colnum,firstrow,coldata)
```

Description

`writeCol(fptr,colnum,firstrow,coldata)` writes elements into an ASCII or binary table extension column.

When writing rows of data to a variable length field, `coldata` must be a cell array.

This function corresponds to the `fits_write_col" (ffpcl)` function in the CFITSIO library C API.

Examples

Write to a table with ASCII, `uint8`, double-precision, and variable-length double-precision columns.

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
ttype = {'Col1','Col2','Col3','Col4'};
tform = {'3A','3B','1D','1PD'};
tunit = {'m/s','kg/m^3','candela','parsec'};
fits.createTbl(fptr,'binary',0,ttype,tform,tunit,'my-table');
fits.writeCol(fptr,1,1,['dog'; 'cat']);
fits.writeCol(fptr,2,1,[0 1 2; 3 4 5; 6 7 8; 9 10 11]);
fits.writeCol(fptr,3,1,[1; 2; 3; 4]);
fits.writeCol(fptr,4,1,{1;[1 2];[1 2 3];[1 2 3 4]});
fits.closeFile(fptr);
fitsdisp('myfile.fits','index',2,'mode','full');
```

Write to a table with logical, bit, double precision, and variable-length complex single-precision columns.

```
import matlab.io.*
fptr = fits.createFile('myfile.fits');
ttype = {'Col1','Col2','Col3','Col4'};
tform = {'2L','3X','1D','1PC'};
tunit = {'','kg/m^3','candela','parsec'};
fits.createTbl(fptr,'binary',0,ttype,tform,tunit,'my-table');
fits.writeCol(fptr,1,1,[false false; true false]);
fits.writeCol(fptr,2,1,int8([0 1 1; 1 1 1; 1 1 1; 1 0 1]));
fits.writeCol(fptr,3,1,[1; 2; 3; 4]);
data = cell(4,1);
data{1} = single(1);
data{2} = single(1+2j);
data{3} = single([1j 2 3+j]);
data{4} = single([1 2+3j 3 4]);
fits.writeCol(fptr,4,1,data);
fits.closeFile(fptr);
fitsdisp('myfile.fits','index',2,'mode','full');
```

See Also

See Also

`createTbl` | `readCol`

matlab.io.fits.getConstantValue

Numeric value of named constant

Syntax

```
N = getConstantValue(name)
```

Description

`N = getConstantValue(name)` returns the numeric value corresponding to the named CFITSIO constant.

Examples

```
import matlab.io.*
n = fits.getConstantValue('BYTE_IMG');
```

matlab.io.fits.getVersion

Revision number of the CFITSIO library

Syntax

```
V = getVersion()
```

Description

`V = getVersion()` returns the revision number of the CFITSIO library. This function corresponds to the `fits_get_version (ffvers)` function in the CFITSIO library C API.

Examples

```
import matlab.io.*
v = fits.getVersion();
```

matlab.io.fits.getOpenFiles

List of open FITS files

Syntax

```
fptrs = getOpenFiles()
```

Description

`fptrs = getOpenFiles()` returns a list of file pointers of all open FITS files.

Examples

```
import matlab.io.*
fptr = fits.openFile('tst0012.fits');
clear fptr;
fptr = fits.getOpenFiles();
fits.closeFile(fptr);
```

See Also

See Also

`closeFile` | `openFile`

matlab.io.hdf4.sd

Interact directly with HDF4 multifile scientific data set (SD) interface

Description

To use these MATLAB functions, you should be familiar with the HDF SD C API. In most cases, the syntax of the MATLAB function is similar to the syntax of the corresponding HDF library function. The functions are implemented as the package `matlab.io.hdf4.sd`. To use this package, prefix the function name with a package path, or use the import function to add the package to the current import list, prior to calling the function, for example,

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','read');
```

Access

matlab.io.hdf4.sd.close	Terminate access to SD interface
matlab.io.hdf4.sd.endAccess	Terminate access to data set
matlab.io.hdf4.sd.getFilename	Name of file
matlab.io.hdf4.sd.select	Identifier of data set with specified index
matlab.io.hdf4.sd.setExternalFile	Store data in external file
matlab.io.hdf4.sd.start	Open HDF file and initialize SD interface

Read/Write

matlab.io.hdf4.sd.create	Create new data set
matlab.io.hdf4.sd.readData	Read subsample of data
matlab.io.hdf4.sd.setFillMode	Set current fill mode of file
matlab.io.hdf4.sd.writeData	Write to data set

Inquiry

matlab.io.hdf4.sd.fileInfo	Number of data sets and global attributes in file
matlab.io.hdf4.sd.getCompInfo	Information about data set compression
matlab.io.hdf4.sd.getFillValue	Fill value for data set
matlab.io.hdf4.sd.getInfo	Information about data set
matlab.io.hdf4.sd.idToRef	Reference number corresponding to data set identifier
matlab.io.hdf4.sd.idType	Type of object
matlab.io.hdf4.sd.isCoordVar	Determine if data set is a coordinate variable
matlab.io.hdf4.sd.isRecord	Determine if data set is appendable
matlab.io.hdf4.sd.nameToIndex	Index value of named data set
matlab.io.hdf4.sd.nameToIndices	List of data sets with same name
matlab.io.hdf4.sd.refToIndex	Index of data set corresponding to reference number

Dimensions

matlab.io.hdf4.sd.dimInfo	Information about dimension
matlab.io.hdf4.sd.getDimID	Dimension identifier
matlab.io.hdf4.sd.getDimScale	Scale data for dimension
matlab.io.hdf4.sd.setDimName	Associate name with dimension
matlab.io.hdf4.sd.setDimScale	Set scale values for dimension

User-defined Attributes

matlab.io.hdf4.sd.attrInfo	Information about attribute
matlab.io.hdf4.sd.findAttr	Index of specified attribute

matlab.io.hdf4.sd.readAttr	Read attribute value
matlab.io.hdf4.sd.setAttr	Write attribute value

Predefined Attributes

matlab.io.hdf4.sd.getCal	Data set calibration information
matlab.io.hdf4.sd.getDataStrs	Predefined attributes for data set
matlab.io.hdf4.sd.getDimStrs	Predefined attributes for dimension
matlab.io.hdf4.sd.getFillValue	Fill value for data set
matlab.io.hdf4.sd.getRange	Maximum and minimum range values
matlab.io.hdf4.sd.setCal	Set data set calibration information
matlab.io.hdf4.sd.setDataStrs	Set predefined attributes for data set
matlab.io.hdf4.sd.setDimStrs	Set label, unit, and format attributes
matlab.io.hdf4.sd.setFillValue	Set fill value for data set
matlab.io.hdf4.sd.setRange	Set maximum and minimum range value for data set

Chunking/Tiling Operations

matlab.io.hdf4.sd.getChunkInfo	Chunk size for data set
matlab.io.hdf4.sd.readChunk	Read chunk from data set
matlab.io.hdf4.sd.setChunk	Set chunk size and compression method of data set
matlab.io.hdf4.sd.writeChunk	Write chunk to data set

Compression

matlab.io.hdf4.sd.setCompress	Set compression method of data set
matlab.io.hdf4.sd.setNBitDataSet	Specify nonstandard bit length for data set values

matlab.io.hdf4.sd.attrInfo

Package: matlab.io.hdf4.sd

Information about attribute

Syntax

```
[name,datatype,nelts] = attrInfo(objID,idx)
```

Description

`[name,datatype,nelts] = attrInfo(objID,idx)` returns the name, data type, and number of elements in the specified attribute. The attribute is specified by its zero-based index value. `objID` can be either an SD interface identifier, a data set identifier, or a dimension identifier.

This function corresponds to the `SDattrinfo` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.findAttr(sdID,'creation_date');
[name,datatype,nelts] = sd.attrInfo(sdID,idx);
data = sd.readAttr(sdID,idx);
sd.close(sdID);
```

See Also

See Also

`sd.findAttr`

matlab.io.hdf4.sd.close

Package: matlab.io.hdf4.sd

Terminate access to SD interface

Syntax

```
sd.close(sdID)
```

Description

`sd.close(sdID)` closes the file identified by `sdID`.

This function corresponds to the `SDend` function in the HDF C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.start`

matlab.io.hdf4.sd.create

Package: matlab.io.hdf4.sd

Create new data set

Syntax

```
sdsID = create(sdID,name,datatype,dims)
```

Description

`sdsID = create(sdID,name,datatype,dims)` creates a data set with the given name `name`, data type `datatype`, and dimension sizes `dims`.

To create a data set with an unlimited dimension, the last value in `dims` should be set to 0.

This function corresponds to the `SDcreate` function in the HDF library C API, but because MATLAB uses FORTRAN-style ordering, the `dims` parameter is reversed with respect to the C library API.

Examples

Create a 3D data set with an unlimited dimension.

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 20 0]);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.endAccess`

matlab.io.hdf4.sd.dimInfo

Package: matlab.io.hdf4.sd

Information about dimension

Syntax

```
[name,dimlen,datatype,nattrs] = dimInfo(dimID)
```

Description

`[name,dimlen,datatype,nattrs] = dimInfo(dimID)` returns the name, length, data type, and number of attributes of the specified dimension.

This function corresponds to the `SDdiminfo` function in the HDF library C API.

Examples

Read a 2-by-3 portion of a data set.

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'latitude');
sdsID = sd.select(sdID,idx);
dimID = sd.getDimID(sdsID,0);
[name,dimlen,datatype,nattrs] = sd.dimInfo(dimID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.getDimID`

matlab.io.hdf4.sd.endAccess

Package: matlab.io.hdf4.sd

Terminate access to data set

Syntax

```
sd.endAccess(sdsID)
```

Description

`sd.endAccess(sdsID)` terminates access to the data set identified by `sdsID`. Failing to call this function after all operations on the specified data set are complete may result in loss of data.

This function corresponds to the `SDendaccess` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.close` | `sd.select`

matlab.io.hdf4.sd.fileInfo

Package: matlab.io.hdf4.sd

Number of data sets and global attributes in file

Syntax

```
[ndatasets,ngatts] = fileInfo(sdID)
```

Description

`[ndatasets,ngatts] = fileInfo(sdID)` returns the number of data sets `ndatasets` and the number of global attributes `ngatts` in the file identified by `sdID`.

`ndatasets` includes the number of coordinate variable data sets.

This function corresponds to the `SDfileinfo` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
[ndatasets,ngatts] = sd.fileInfo(sdID);
sd.close(sdID);
```

See Also

See Also

`sd.getInfo`

matlab.io.hdf4.sd.findAttr

Package: matlab.io.hdf4.sd

Index of specified attribute

Syntax

```
idx = findAttr(objID,attrname)
```

Description

`idx = findAttr(objID,attrname)` returns the index of the attribute specified by `attrname`. The `objID` input can be either an SD interface identifier, a data set identifier, or a dimension identifier.

The function corresponds to the `SDfindattr` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.findAttr(sdID,'creation_date');
data = sd.readAttr(sdID,idx);
sd.close(sdID);
```

See Also

See Also

`sd.getDimID` | `sd.readAttr` | `sd.select` | `sd.start`

matlab.io.hdf4.sd.getCal

Package: matlab.io.hdf4.sd

Data set calibration information

Syntax

```
[cal,calErr,offset,offsetErr,datatype] = getCal(sdsID)
```

Description

`[cal,calErr,offset,offsetErr,datatype] = getCal(sdsID)` retrieves the calibration information associated with a data set.

This function corresponds to the `SDgetcal` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
[cal,calErr,offset,offsetErr,dtype] = sd.getCal(sdsID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.setCal`

matlab.io.hdf4.sd.getChunkInfo

Package: matlab.io.hdf4.sd

Chunk size for data set

Syntax

```
chunkDims = getChunkInfo(sdsID)
```

Description

`chunkDims = getChunkInfo(sdsID)` returns the chunk size for the data set specified by `sdsID`. If a data set is chunked, the dimensions of the chunks is returned in `chunkDims`. Otherwise `chunkDims` is `[]`.

This function corresponds to the `SDgetchunkinfo` function in the HDF library C API, but because MATLAB uses FORTRAN-style ordering, the `chunkDims` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
cdims = sd.getChunkInfo(sdsID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.getCompInfo` | `sd.setChunk`

matlab.io.hdf4.sd.getCompInfo

Package: matlab.io.hdf4.sd

Information about data set compression

Syntax

```
[comptype,compparms] = getCompType(sdsID)
```

Description

`[comptype,compparms] = getCompType(sdsID)` retrieves the compression type and compression information for a data set. `comptype` can be one of the following values.

`'none'`	No compression
`'rle'`	Run-length encoding
`'nbit'`	NBIT compression
`'skphuff'`	Skipping Huffman compression
`'deflate'`	GZIP compression
`'szip'`	SZIP compression

If `comptype` is `'none'` or `'rle'`, then `compparms` is `[]`.

If `comptype` is `'nbit'`, then `compparms` is a 4-element array.

`compparm(1)`	sign_ext
`compparm(2)`	fill_one
`compparm(3)`	start_bit
`compparm(4)`	bit_len

If `comptype` is `'deflate'`, then `compparms` contains the deflation value, a number between 0 and 9.

If `comptype` is `'szip'`, them `compparms` is a 5-element array. Consult the HDF Reference Manual for details on SZIP compression.

This function corresponds to the `SDgetcompinfo` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[100 50]);
sd.setCompress(sdsID,'deflate',5);
[comptype,compparm] = sd.getCompInfo(sdsID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.setCompress` | `sd.setNBitDataSet`

matlab.io.hdf4.sd.getDataStrs

Package: matlab.io.hdf4.sd

Predefined attributes for data set

Syntax

```
[label,unit,format,coordsys] = getDataStrs(sdsID)
[label,unit,format,coordsys] = getDataStrs(sdsID,maxlen)
```

Description

`[label,unit,format,coordsys] = getDataStrs(sdsID)` returns the label, unit, format, and coordsys attributes for the data set identified by `sdsID`.

`[label,unit,format,coordsys] = getDataStrs(sdsID,maxlen)` returns the label, unit, format, and coordsys attributes for the data set identified by `sdsID`. The `maxlen` input is the maximum length of the attribute text. It defaults to 1000 if not specified.

This function corresponds to the `SDgetdatastrs` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
[label,unit,fmt,coordsys] = sd.getDataStrs(sdsID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.setDataStrs`

matlab.io.hdf4.sd.getDimID

Package: matlab.io.hdf4.sd

Dimension identifier

Syntax

```
dimID = getDimID(sdsID,dimnumber)
```

Description

`dimID = getDimID(sdsID,dimnumber)` returns the identifier of the dimension given its index.

Note: MATLAB uses Fortran-style indexing while the HDF library uses C-style indexing. The order of the dimension identifiers retrieved with `sd.getDimID` are reversed from what would be retrieved via the C API.

This function corresponds to the `SDgetdimid` function in the HDF library C API.

Examples

Read an entire data set.

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
dimID0 = sd.getDimID(sdsID,0);
dimID1 = sd.getDimID(sdsID,1);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.setDimName`

matlab.io.hdf4.sd.getDimScale

Package: matlab.io.hdf4.sd

Scale data for dimension

Syntax

```
scale = getDimScale(dimID)
```

Description

`scale = getDimScale(dimID)` returns the scale values of the dimension identified by `dimID`.

This function corresponds to the `SDgetdimscale` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',20);
dimID = sd.getDimID(sdsID,0);
sd.setDimName(dimID,'x');
sd.setDimScale(dimID,0:5:95);
sd.endAccess(sdsID);
sd.close(sdID);
sdID = sd.start('myfile.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
dimID = sd.getDimID(sdsID,0);
scale = sd.getDimScale(dimID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.dimInfo` | `sd.setDimScale`

matlab.io.hdf4.sd.getDimStrs

Package: matlab.io.hdf4.sd

Predefined attributes for dimension

Syntax

```
[label,unit,format] = getDimStrs(dimID)
```

Description

`[label,unit,format] = getDimStrs(dimID)` returns the label, unit, and format attributes for the dimension identified by `dimID`.

This function corresponds to the `SDgetdimstrs` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',20);
dimID = sd.getDimID(sdsID,0);
sd.setDimName(dimID,'x');
sd.setDimStrs(dimID,'xdim','none','%d');
sd.endAccess(sdsID);
sd.close(sdID);
sdID = sd.start('myfile.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
dimID = sd.getDimID(sdsID,0);
[label,unit,fmt] = sd.getDimStrs(dimID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.setDimStrs`

matlab.io.hdf4.sd.getFilename

Package: matlab.io.hdf4.sd

Name of file

Syntax

```
filename = getFilename(sdID)
```

Description

`filename = getFilename(sdID)` retrieves the name of a file previously opened with the `sd` package with identifier `sdID`.

This function corresponds to the `SDgetfilename` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
filename = sd.getFilename(sdID);
sd.close(sdID);
```

See Also

See Also

`sd.getInfo` | `sd.start`

matlab.io.hdf4.sd.getFillValue

Package: matlab.io.hdf4.sd

Fill value for data set

Syntax

```
fillvalue = getFillValue(sdsID)
```

Description

`fillvalue = getFillValue(sdsID)` returns the fill value for a data set.

This function corresponds to the `SDgetfillvalue` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
fillvalue = sd.getFillValue(sdsID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.setFillValue`

matlab.io.hdf4.sd.getInfo

Package: matlab.io.hdf4.sd

Information about data set

Syntax

```
[name,dims,datatype,nattrs] = getInfo(sdsID)
```

Description

`[name,dims,datatype,nattrs] = getInfo(sdsID)` returns the name, extents, and number of attributes of the data set identified by `sdsID`.

This function corresponds to the `SDgetinfo` function in the HDF library C API, but because MATLAB uses FORTRAN-style ordering, the dims parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
[name,dims,datatype,nattrs] = sd.getInfo(sdsID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.attrInfo` | `sd.dimInfo` | `sd.fileInfo`

matlab.io.hdf4.sd.getRange

Package: matlab.io.hdf4.sd

Maximum and minimum range values

Syntax

```
[maxval,minval] = getRange(sdsID)
```

Description

`[maxval,minval] = getRange(sdsID)` retrieves the "valid_range" two-element attribute value.

This function corresponds to the `SDgetrange` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
[maxval,minval] = sd.getRange(sdsID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.setRange`

matlab.io.hdf4.sd.idToRef

Package: matlab.io.hdf4.sd

Reference number corresponding to data set identifier

Syntax

```
ref = idToRef(sdsID)
```

Description

`ref = idToRef(sdsID)` returns the reference number corresponding to the data set.

This function corresponds to the `SDidtoref` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
ref = sd.idToRef(sdsID);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.refToIndex`

matlab.io.hdf4.sd.idType

Package: matlab.io.hdf4.sd

Type of object

Syntax

```
objtype = idType(objID)
```

Description

`objtype = idType(objID)` returns the type of object that `objID` represents. Possible values for `objtype` are:

`'NOT_SDAPI_ID'`	The object is not an HDF SD identifier.
`'SD_ID'`	The object is an SD identifier (file handle) .
`'SDS_ID'`	The object is a data set identifier.
`'DIM_ID'`	The object is a dimension identifier.

This function corresponds to the `SDidtype` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
objType = sd.idType(sdID);
sd.close(sdID);
```

matlab.io.hdf4.sd.isCoordVar

Package: matlab.io.hdf4.sd

Determine if data set is a coordinate variable

Syntax

```
TF = isCoordVar(sdsID)
```

Description

`TF = isCoordVar(sdsID)` returns `true` if a data set is a coordinate variable and returns `false` otherwise.

This function corresponds to the `SDiscoordvar` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
ndataset = sd.fileInfo(sdID);
for idx = 0:ndataset-1
 sdsID = sd.select(sdID,idx);
 sdsName = sd.getInfo(sdsID);
 fprintf('%s (index %d) ', sdsName, idx);
 if ( sd.isCoordVar(sdsID) )
  fprintf('is a coordinate variable.\n');
 else
  fprintf('is not a coordinate variable.\n');
 end
 sd.endAccess(sdsID);
end
sd.close(sdID);
```

See Also

See Also

`sd.isRecord`

matlab.io.hdf4.sd.isRecord

Package: matlab.io.hdf4.sd

Determine if data set is appendable

Syntax

```
TF = isRecord(sdsID)
```

Description

`TF = isRecord(sdsID)` determines if the data set specified by `sdsID` is appendable, meaning that the slowest changing dimension is unlimited.

This function corresponds to the `SDisrecord` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
ndataset = sd.fileInfo(sdID);
for idx = 0:ndataset-1
    sdsID = sd.select(sdID,idx);
    sdsName = sd.getInfo(sdsID);
    if sd.isRecord(sdsID)
        fprintf('%s is a record variable.\n',sdsName);
    else
        fprintf('%s is not a record variable.\n',sdsName);
    end
    sd.endAccess(sdsID);
end
sd.close(sdID);
```

See Also

See Also

`sd.isCoordVar`

matlab.io.hdf4.sd.nameToIndex

Package: matlab.io.hdf4.sd

Index value of named data set

Syntax

```
idx = nameToIndex(sdID,sdsname)
```

Description

`idx = nameToIndex(sdID,sdsname)` returns the index of the data set with the name specified by `sdsname`. If there is more than one data set with the same name, the routine returns the index of the first one.

This function corresponds to the `SDnametoindex` function in the HDF C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf','read');
idx = sd.nameToIndex(sdID,'temperature');
sd.close(sdID);
```

See Also

See Also

`sd.select`

matlab.io.hdf4.sd.nameToIndices

Package: matlab.io.hdf4.sd

List of data sets with same name

Syntax

```
varstruct = nameToIndices(sdID,sdsname)
```

Description

`varstruct = nameToIndices(sdID,sdsname)` returns a structure array for all data sets with the same name. Each element of `varstruct` has two fields.

`'index'`	Index of data set
`'type'`	Type of data set, either `'SDSVAR'`, `'COORDVAR'`, or `'UNKNOWN'`

This function corresponds to the `SDnametoindices` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
varlist = sd.nameToIndices(sdID,'latitude');
sd.close(sdID);
```

See Also

See Also

`sd.isCoordVar` | `sd.setDimScale`

matlab.io.hdf4.sd.readAttr

Package: matlab.io.hdf4.sd

Read attribute value

Syntax

```
data = readAttr(objID,idx)
```

Description

`data = readAttr(objID,idx)` reads the value of the attribute specified by index `idx`. The `objID` input can be an SD interface identifier, a data set identifier, or a dimension identifier. `idx` is a zero-based index.

This function corresponds to the `SDreadattr` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.findAttr(sdID,'creation_date');
data = sd.readAttr(sdID,idx);
sd.close(sdID);
```

See Also

See Also

`sd.findAttr` | `sd.setAttr`

matlab.io.hdf4.sd.readChunk

Package: matlab.io.hdf4.sd

Read chunk from data set

Syntax

```
datachunk = readChunk(sdsID,origin)
```

Description

`datachunk = readChunk(sdsID,origin)` reads an entire chunk of data from the data set identified by `sdsID`. The `origin` input specifies the location of the chunk in zero-based chunking coordinates, not in data set coordinates.

This function corresponds to the `SDreadchunk` function in the HDF library C API, but because MATLAB uses FORTRAN-style ordering, the origin parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
dataChunk = sd.readChunk(sdsID,[0 1]);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.writeChunk` | `sd.writeData`

matlab.io.hdf4.sd.readData

Package: matlab.io.hdf4.sd

Read subsample of data

Syntax

```
data = readData(sdsID)
data = readData(sdsID,start,count)
data = readData(sdsID,start,count,stride)
```

Description

`data = readData(sdsID)` reads all of the data for the data set identified by `sdsID`.

`data = readData(sdsID,start,count)` reads a contiguous hyperslab of data from the data set identified by `sdsID`. The `start` input specifies the starting position from where the hyperslab is read. `count` specifies the number of values to read along each data set dimension.

`data = readData(sdsID,start,count,stride)` reads a strided hyperslab of data from the data set identified by `sdsID`.

`start`, `count`, and `stride` use zero-based indexing.

This function corresponds to the `SDreaddata` function in the HDF library C API, but because MATLAB uses FORTRAN-style ordering, the `start`, `count`, and `stride` parameters are reversed with respect to the C library API.

Examples

Read an entire data set.

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
```

```
sdsID = sd.select(sdID,idx);
data = sd.readData(sdsID);
sd.endAccess(sdsID);
sd.close(sdID);
```

Read a 2-by-3 portion of a data set.

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
data = sd.readData(sdsID,[0 0],[2 3]);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.writeData`

matlab.io.hdf4.sd.refToIndex

Package: matlab.io.hdf4.sd

Index of data set corresponding to reference number

Syntax

```
idx = refToIndex(sdID,ref)
```

Description

`idx = refToIndex(sdID,ref)` returns the index of the data set identified by its reference number `ref`. The `idx` output can then be passed to `sd.select`, to obtain a data set identifier.

This function corresponds to the `SDreftoindex` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf','read');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
ref = sd.idToRef(sdsID);
idx2 = sd.refToIndex(sdID,ref);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.idToRef` | `sd.select`

matlab.io.hdf4.sd.select

Package: matlab.io.hdf4.sd

Identifier of data set with specified index

Syntax

```
sdsID = select(sdID,IDX)
```

Description

`sdsID = select(sdID,IDX)` returns the identifier of the data set specified by its index.

This function corresponds to the `SDselect` function in the HDF C library.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf','read');
idx = sd.nameToIndex(sdID,'temperature');
sdsID = sd.select(sdID,idx);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.endAccess` | `sd.nametoIndex`

matlab.io.hdf4.sd.setAttr

Package: matlab.io.hdf4.sd

Write attribute value

Syntax

```
setAttr(objID,name,value)
```

Description

`setAttr(objID,name,value)` attaches an attribute to the object specified by `objID`. If `objID` is the SD interface identifier, then a global attribute is created. If a data identifier is specified, then the attribute is attached to the data set. If a dimension identifier is specified, then the attribute is attached to the dimension.

This function corresponds to the `SDsetattr` function in the HDF library C API.

Examples

Attach attributes to a file, a data set, and to a dimension.

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sd.setAttr(sdID,'creation_date',datestr(now));
sdsID = sd.create(sdID,'temperature','double',[10 20]);
sd.setAttr(sdsID,'long_name','Temperature in sunlight.');
dimID0 = sd.getDimID(sdsID,0);
sd.setAttr(dimID0,'long_name','latitude');
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.findAttr` | `sd.readAttr`

matlab.io.hdf4.sd.setCal

Package: matlab.io.hdf4.sd

Set data set calibration information

Syntax

```
setCal(sdsID,cal,calErr,offset,offsetErr,datatype)
```

Description

`setCal(sdsID,cal,calErr,offset,offsetErr,datatype)` sets the calibration information for a data set.

This function corresponds to the `SDsetcal` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 20]);
sd.setDataStrs(sdsID,'Temperature','degrees_kelvin','%.3f','spherical');
sd.setCal(sdsID,1,0,273,0,'double');
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.getCal`

matlab.io.hdf4.sd.setChunk

Package: matlab.io.hdf4.sd

Set chunk size and compression method of data set

Syntax

```
setChunk(sdsID,chunkSize,comptype,compparm)
```

Description

`setChunk(sdsID,chunkSize,comptype,compparm)` makes the data set specified by `sdsID` a chunked data set with chunk size given by `chunkSize` and compression specified by `comptype` and `compparm`. The `comptype` input can be one of the following values.

`'none'`	No compression
`'skphuff'`	Skipping Huffman compression
`'deflate'`	GZIP compression
`'rle'`	Run-length encoding

- If `comptype` is `'none'` or `'rle'`, then `compparm` need not be specified.
- If `comptype` is `'skphuff'`, then `compparm` is the skipping size.
- If `comptype` is `'deflate'`, then `compparm` is the deflate level, which must be between 0 and 9.

This function corresponds to the `SDsetchunk` function in the HDF library C API, but because MATLAB uses FORTRAN-style ordering, the `chunkSize` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdf4.*
```

```
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[200 100]);
sd.setChunk(sdsID,[20 10],'skphuff',16);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

sd.readChunk | sd.writeChunk

matlab.io.hdf4.sd.setCompress

Package: matlab.io.hdf4.sd

Set compression method of data set

Syntax

```
setCompress(sdsID,comptype,compparm)
```

Description

`setCompress(sdsID,comptype,compparm)` sets the compression scheme for the specified data set. The compression must be done before writing the data set. Specify `comptype` as one of these values.

`'none'`	No compression
`'skphuff'`	Skipping Huffman compression
`'deflate'`	GZIP compression
`'rle'`	Run-length encoding

- If `comptype` is `'none'` or `'rle'`, then `compparm` need not be specified.
- If `comptype` is `'skphuff'`, then `compparm` is the skipping size.
- If `comptype` is `'deflate'`, then `compparm` is the deflate level, which must be between 0 and 9.

This function corresponds to the `SDsetcompress` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[200 100]);
sd.setCompress(sdsID,'deflate',5);
data = rand(200,100);
```

```
sd.writeData(sdsID,[0 0],data);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.setChunk`

matlab.io.hdf4.sd.setDataStrs

Package: matlab.io.hdf4.sd

Set predefined attributes for data set

Syntax

```
setDataStrs(sdsID,label,unit,format,coordsys)
```

Description

`setDataStrs(sdsID,label,unit,format,coordsys)` sets the predefined attributes `'long_name'`, `'units'`, `'format'`, and `'coordsys'` for a data set.

This function corresponds to the `SDsetdatastrs` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 20]);
sd.setDataStrs(sdsID,'degrees_celsius','degrees_east','','geo');
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.getDataStrs` | `sd.setDimStrs`

matlab.io.hdf4.sd.setDimName

Package: matlab.io.hdf4.sd

Associate name with dimension

Syntax

```
setDimName(dimID,dimname)
```

Description

`setDimName(dimID,dimname)` sets the name of the dimension identified by `dimID` to `dimname`.

This function corresponds to the `SDsetdimname` function in the HDF library C API.

Examples

Create a 2D data set with dimensions `'lat'` and `'lon'`.

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 20]);
dimID = sd.getDimID(sdsID,0);
sd.setDimName(dimID,'lat');
dimID = sd.getDimID(sdsID,1);
sd.setDimName(dimID,'lon');
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.dimInfo`

matlab.io.hdf4.sd.setDimScale

Package: matlab.io.hdf4.sd

Set scale values for dimension

Syntax

```
setDimScale(dimID,scaledata)
```

Description

`setDimScale(dimID,scaledata)` sets the scale values for a dimension.

This function corresponds to the `SDsetdimscale` function in the HDF library C API.

Examples

Create a 2D data set with dimensions `'lat'` and `'lon'`.

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 20]);
dimID = sd.getDimID(sdsID,0);
sd.setDimName(dimID,'lat');
sd.setDimScale(dimID,0:10:90);
dimID = sd.getDimID(sdsID,1);
sd.setDimName(dimID,'lon');
sd.setDimScale(dimID, -180:18:179);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.getDimScale`

matlab.io.hdf4.sd.setDimStrs

Package: matlab.io.hdf4.sd

Set label, unit, and format attributes

Syntax

```
setDimStrs(dimID,label,unit,format)
```

Description

`setDimStrs(dimID,label,unit,format)` sets the label, unit, and format attributes for the dimension identified by `dimID`.

This function corresponds to the `SDsetdimstrs` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 20]);
dimID = sd.getDimID(sdsID,0);
sd.setDimName(dimID,'lat');
dimID = sd.getDimID(sdsID,1);
sd.setDimName(dimID,'lon');
sd.setDimStrs(dimID,'Degrees of Longitude','degrees_east','%.2f');
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.getDimStrs`

matlab.io.hdf4.sd.setExternalFile

Package: matlab.io.hdf4.sd

Store data in external file

Syntax

```
setExternalFile(sdsID,extfile,offset)
```

Description

`setExternalFile(sdsID,extfile,offset)` moves data values (not metadata) into the external data file `extfile` starting at the byte offset, `offset`.

Data can only be moved once for any given data set. The external file should be kept with the main file.

This function corresponds to the `SDsetexternalfile` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 20]);
sd.setExternalFile(sdsID,'myExternalFile.dat',0);
sd.writeData(sdsID,[0 0],rand(10,20));
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.create` | `sd.writeData`

matlab.io.hdf4.sd.setFillMode

Package: matlab.io.hdf4.sd

Set current fill mode of file

Syntax

```
prevmode = setFillMode(sdID,fillmode)
```

Description

`prevmode = setFillMode(sdID,fillmode)` returns the previous fill mode of a file and resets it to `fillmode`. This setting applies to all data sets contained in the file identified by `sdID`.

Possible values of `fillmode` are `'fill'`, and `'nofill'`. `'fill'` is the default mode and indicates that fill values will be written when the data set is created. `'nofill'` indicates that the fill values will not be written.

When a fixed-size data set is created, the first call to `sd.writeData` will fill the entire data set with the default or user-defined fill value if `fillmode` is `'fill'`. In data sets with an unlimited dimension, if a new write operation takes place along the unlimited dimension beyond the last location of the previous write operation, the array locations between these written areas will be initialized to the user-defined fill value, or the default fill value if a user-defined fill value has not been specified.

If it is certain that all data set values will be written before any read operation takes place, there is no need to write the fill values. Calling `sd.setFillMode` with `'nofill'` can improve performance in this case.

This function corresponds to the `SDsetfillmode` function in the HDF library C API.

Examples

Write two partial records. Write the first in `'nofill'` mode, and the second with `'fill'` mode.

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sd.setFillMode(sdID,'nofill');
sdsID = sd.create(sdID,'temperature','double',[10 10 0]);
sd.writeData(sdsID,[0 0 0], rand(5,5));
sd.setFillMode(sdID,'fill');
sd.setFillValue(sdsID,-999);
sd.writeData(sdsID,[0 0 1], rand(5,5));
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

sd.getFillValue | sd.setFillValue

matlab.io.hdf4.sd.setFillValue

Package: matlab.io.hdf4.sd

Set fill value for data set

Syntax

```
setFillValue(sdsID,fillValue)
```

Description

`setFillValue(sdsID,fillValue)` sets the fill value for a data set. The fill value must have the same data type as the data set.

This function corresponds to the `SDsetfillvalue` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 20]);
sd.setFillValue(sdsID,-999);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.getFillValue`

matlab.io.hdf4.sd.setNBitDataSet

Package: matlab.io.hdf4.sd

Specify nonstandard bit length for data set values

Syntax

```
setNBitDataSet(sdsID,startBit,bitlen,ext,fillone)
```

Description

`setNBitDataSet(sdsID,startBit,bitlen,ext,fillone)` specifies that the integer data set identified by `sdsID` contains data of a non-standard length defined by `startBit` and `bitlen`.

Any length between 1 and 32 bits can be specified. After `setNBitDataset` has been called for the data set array, any read or write operation will involve conversion between the new data length of the data set array and the data length of the read or write buffer.

Bit lengths of all data types are counted from the right of the bit field starting with 0. In a bit field containing the values 01111011, bits 2 and 7 are set to 0 and all the other bits are set to 1. The least significant bit is bit 0.

The `startBit` parameter specifies the left-most position of the variable-length bit field to be written. For example, in the bit field described in the preceding paragraph a `startBit` parameter set to 4 would correspond to the fourth bit value of 1 from the right.

The parameter `bitlen` specifies the number of bits of the variable-length bit field to be written. This number includes the starting bit and the count proceeds toward the right end of the bit field - toward the lower-bit numbers. For example, starting at bit 5 and writing 4 bits of the bit field described in the preceding paragraph would result in the bit field 1110 being written to the data set. This would correspond to a `startBit` value of 5 and a `bitlen` value of 4.

The parameter `ext` specifies whether to use the left-most bit of the variable-length bit field to sign-extend to the left-most bit of the data set data. For example, if 9-bit signed integer data is extracted from bits 17-25 and the bit in position 25 is 1, then when the

data is read back from disk, bits 26-31 will be set to 1. Otherwise bit 25 will be 0 and bits 26-31 will be set to 0. The `ext` parameter can be set to `true` (or 1) or `false` (or 0); specify `true` to sign-extend.

The parameter `fillone` specifies whether to fill the "background" bits with the value 1 or 0. This parameter is also set to either `true` (or 1) or `false` (or 0).

The "background" bits of a non-standard length data set are the bits that fall outside of the non-standard length bit field stored on disk. For example, if five bits of an unsigned 16-bit integer data set located in bits 5 to 9 are written to disk with the parameter `fillone` set to `true` (or 1), then when the data is reread into memory bits 0 to 4 and 10 to 15 would be set to 1. If the same 5-bit data was written with a `fillone` value of `false` (or 0), then bits 0 to 4 and 10 to 15 would be set to 0.

The operation on `fillone` is performed before the operation on `ext`. For example, using the `ext` example above, bits 0 to 16 and 26 to 31 will first be set to the background bit value, and then bits 26 to 31 will be set to 1 or 0 based on the value of the 25th bit.

This function corresponds to the `SDsetnbitdataset` in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','int32',[10 20]);
sd.setNBitDataSet(sdsID,6,4,0,0);
data = int32([1:200]);
data = reshape(data,10,20);
sd.writeData(sdsID,[0 0],data);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.setCompress`

matlab.io.hdf4.sd.setRange

Package: matlab.io.hdf4.sd

Set maximum and minimum range value for data set

Syntax

```
setRange(sdsID,maxval,minval)
```

Description

`setRange(sdsID,maxval,minval)` sets the maximum and minimum range values of the data set identified by `sdsID`. These values form the "valid_range" attribute for `sdsID`.

The actual maximum and minimum values of the data set are not computed. The "valid_range" attribute is for informational purposes only.

This function corresponds to the `SDsetrange` function in the HDF library C interface.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 20]);
sd.setDataStrs(sdsID,'Temperature','degrees_celsius','%.2f','');
sd.setRange(sdsID,1000,-273.15);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.getRange`

matlab.io.hdf4.sd.start

Package: matlab.io.hdf4.sd

Open HDF file and initialize SD interface

Syntax

```
sdID = start(filename)
sdID = start(filename,access)
```

Description

`sdID = start(filename)` opens the file `filename` in read-only mode. This routine must be called for each file before any other `sd` calls can be made on that file.

`sdID = start(filename,access)` opens the file `filename` with the access mode specified by `access`. This routine must be called before any other SD interface operations can be made on that file. Specify `access` as one these values:

- `'read'`
- `'write'`
- `'create'`

`access` defaults to `'read'` if not supplied.

This function corresponds to the `SDstart` function in the HDF library C API.

Examples

```
import matlab.io.hdf4.*
sdID = sd.start('sd.hdf');
sd.close(sdID);
```

See Also

See Also

`sd.close`

matlab.io.hdf4.sd.writeChunk

Package: matlab.io.hdf4.sd

Write chunk to data set

Syntax

```
writeChunk(sdsID,origin,dataChunk)
```

Description

`writeChunk(sdsID,origin,dataChunk)` writes an entire chunk of data to the data set identified by `sdsID`. The `origin` input specifies the location of the chunk in chunking coordinates, not in data set coordinates.

This function corresponds to the `SDwritechunk` function in the HDF library C API, but because MATLAB uses FORTRAN-style ordering, the origin parameter is reversed with respect to the C library API.

Examples

Write to a 2D chunked and compressed data set. The chunked layout constitutes a 10-by-5 grid.

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[100 50]);
sd.setChunk(sdsID,[10 10],'deflate',5);
for j = 0:9
    for k = 0:4
        origin = [j k];
        data = (1:100) + k*1000 + j*10000;
        data = reshape(data,10,10);
        sd.writeChunk(sdsID,origin,data);
    end
end
```

```
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

sd.readChunk | sd.writeData

matlab.io.hdf4.sd.writeData

Package: matlab.io.hdf4.sd

Write to data set

Syntax

```
writeData(sdsID,data)
writeData(sdsID,start,data)
writeData(sdsID,start,stride,data)
```

Description

`writeData(sdsID,data)` writes all the data to the data set identified by `sdsID`.

`writeData(sdsID,start,data)` writes a contiguous hyperslab to the data set. `start` specifies the zero-based starting index. The number of values along each dimension is inferred from the size of `data`.

`writeData(sdsID,start,stride,data)` writes a strided hyperslab of data to a grid datafield. The number of elements to write along each dimension is inferred either from the size of `data` or from the data set itself.

`start` and `stride` use zero-based indexing.

This function corresponds to the `SDreadchunk` function in the HDF library C API, but because MATLAB uses FORTRAN-style ordering, the `start` and `stride` parameters are reversed with respect to the C library API.

Examples

Write to a 2D data set.

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 20]);
```

```
data = rand(10,20);
sd.writeData(sdsID,[0 0],data);
sd.endAccess(sdsID);
sd.close(sdID);
```

Write to a 2D unlimited data set.

```
import matlab.io.hdf4.*
sdID = sd.start('myfile.hdf','create');
sdsID = sd.create(sdID,'temperature','double',[10 0]);
data = rand(10,20);
sd.writeData(sdsID,[0 0],data);
data = rand(10,30);
sd.writeData(sdsID,[0 20],data);
sd.endAccess(sdsID);
sd.close(sdID);
```

See Also

See Also

`sd.readData`

matlab.io.hdfeos.gd

Low-level access to HDF-EOS grid data

Description

To use these MATLAB functions, you must be familiar with the HDF-EOS library C interface. In most cases, the syntax of the MATLAB function is similar to the syntax of the corresponding HDF-EOS library function. The functions are implemented as the package `matlab.io.hdfeos.gd`. To use this package, prefix the function name with a package path, or use the import function to add the package to the current import list, prior to calling the function, for example,

```
import matlab.io.hdfeos.*
gfid = gd.open(filename,'read');
```

Access

matlab.io.hdfeos.gd.attach	Attach to existing grid
matlab.io.hdfeos.gd.close	Close HDF-EOS grid file
matlab.io.hdfeos.gd.detach	Detach from existing grid
matlab.io.hdfeos.gd.open	Open grid file

Definition

matlab.io.hdfeos.gd.create	Create new grid structure
matlab.io.hdfeos.gd.defComp	Set grid field compression
matlab.io.hdfeos.gd.defDim	Define new dimension within grid
matlab.io.hdfeos.gd.defField	Define new data field within grid
matlab.io.hdfeos.gd.defOrigin	Define origin of pixels in grid
matlab.io.hdfeos.gd.defPixReg	Define pixel registration within grid
matlab.io.hdfeos.gd.defProj	Define grid projection
matlab.io.hdfeos.gd.writeBlkSomOffset	Write Block SOM offset

Basic I/O

matlab.io.hdfeos.gd.getFillValue	Fill value for specified field
matlab.io.hdfeos.gd.readAttr	Read grid attribute
matlab.io.hdfeos.gd.readField	Read data from grid field
matlab.io.hdfeos.gd.setFillValue	Set fill value for specified field
matlab.io.hdfeos.gd.writeAttr	Write grid attribute
matlab.io.hdfeos.gd.writeField	Write data to grid field

Inquiry

matlab.io.hdfeos.gd.compInfo	Compression information for field
matlab.io.hdfeos.gd.dimInfo	Length of dimension
matlab.io.hdfeos.gd.fieldInfo	Information about data field
matlab.io.hdfeos.gd.gridInfo	Position and size of grid
matlab.io.hdfeos.gd.inqAttrs	Names of grid attributes
matlab.io.hdfeos.gd.inqDims	Information about dimensions defined in grid
matlab.io.hdfeos.gd.inqFields	Information about data fields defined in grid
matlab.io.hdfeos.gd.inqGrid	Names of grids in file
matlab.io.hdfeos.gd.nEntries	Number of specified objects
matlab.io.hdfeos.gd.originInfo	Origin code
matlab.io.hdfeos.gd.pixRegInfo	Pixel registration code
matlab.io.hdfeos.gd.projInfo	GCTP projection information about grid
matlab.io.hdfeos.gd.readBlkSomOffset	Read Block SOM offset

Subsetting

matlab.io.hdfeos.gd.defBoxRegion	Define region of interest by latitude and longitude
matlab.io.hdfeos.gd.defVrtRegion	Define vertical subset region
matlab.io.hdfeos.gd.extractRegion	Read region of interest from field
matlab.io.hdfeos.gd.getPixels	Pixel rows and columns for latitude/longitude pairs
matlab.io.hdfeos.gd.getPixValues	Read data values for specified pixels
matlab.io.hdfeos.gd.interpolate	Bilinear interpolation on a grid field
matlab.io.hdfeos.gd.regionInfo	Information about subsetted region

Tiling

matlab.io.hdfeos.gd.defTile	Define tiling parameters
matlab.io.hdfeos.gd.readTile	Read single tile of data from field
matlab.io.hdfeos.gd.setTileComp	Set tiling and compression for field with fill value
matlab.io.hdfeos.gd.tileInfo	Tile size of grid field
matlab.io.hdfeos.gd.writeTile	Write tile to field

Utility

matlab.io.hdfeos.gd.ij2ll	Convert row and column space to latitude and longitude
matlab.io.hdfeos.gd.ll2ij	Convert latitude and longitude to row and column space

matlab.io.hdfeos.gd.sphereCodeToName	Name corresponding to GCTP sphere code
matlab.io.hdfeos.gd.sphereNameToCode	Numeric GCTP code corresponding to sphere name

matlab.io.hdfeos.gd.attach

Package: matlab.io.hdfeos.gd

Attach to existing grid

Syntax

```
gridID = attach(gfID,gridName)
```

Description

`gridID = attach(gfID,gridName)` attaches to the grid dataset identified by `gridName` in the file identified by `gfID`. The `gridID` output is the identifier for the grid dataset.

This function corresponds to the `GDattach` function in the HDF-EOS library C API.

Examples

Attach to the grid named `'PolarGrid'` in the file `'grid.hdf'`.

```
import matlab.io.hdfeos.*
gfID = gd.open('grid.hdf');
gridID = gd.attach(gfID,'PolarGrid');
gd.detach(gridID);
gd.close(gfID);
```

See Also

See Also

`gd.detach` | `gd.inqGrid` | `gd.readField`

matlab.io.hdfeos.gd.close

Package: matlab.io.hdfeos.gd

Close HDF-EOS grid file

Syntax

```
close(gfID)
```

Description

`close(gfID)` closes an HDF-EOS grid file identified by `gfID`.

This function corresponds to the `GDclose` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfID = gd.open('grid.hdf');
gd.close(gfID);
```

See Also

See Also

`gd.create` | `gd.open`

matlab.io.hdfeos.gd.compInfo

Package: matlab.io.hdfeos.gd

Compression information for field

Syntax

```
[compCode,parms] = compInfo(gridID,fieldname)
```

Description

`[compCode,parms] = compInfo(gridID,fieldname)` returns the compression code and compression parameters for a given field. Refer to `gd.defComp` for a description of various compression schemes and parameters.

This function corresponds to the `GDcompinfo` function in the HDF-EOS library C API.

Examples

Get compression information for the `ice_temp` field.

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
[compCode,compParms] = gd.compInfo(gridID,'ice_temp');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defComp`

matlab.io.hdfeos.gd.create

Package: matlab.io.hdfeos.gd

Create new grid structure

Syntax

```
gridID = create(gfID,gridName,xdim,ydim,upLeft,lowRight)
```

Description

`gridID = create(gfID,gridName,xdim,ydim,upLeft,lowRight)` creates a new grid structure where `gfID` is the grid file identifier. `gridName` is the name of the new grid. `xdim` and `ydim` define the size of the grid. `upLeft` is a two-element vector containing the location of the upper left pixel, and `lowRight` is a two-element vector containing the location of the lower right pixel.

Note: `upLeft` and `lowRight` are in units of meters for all GCTP projections other than the geographic and bcea projections, which should have units of packed degrees.

Note: For certain projections, `upLeft` and `lowRight` can be given as `[]`.

- Polar Stereographic projection of an entire hemisphere.
- Goode Homolosine projection of the entire globe.
- Lambert Azimuthal entire polar or equatorial projection.

Note: MATLAB uses Fortran-style ordering, but the HDF-EOS library uses C-style ordering.

This function corresponds to the `GDcreate` function in the HDF-EOS library C API.

Examples

Create a polar stereographic grid of the northern hemisphere.

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
gridID = gd.create(gfid,'PolarGrid',100,100,[],[]);
gd.detach(gridID);
gd.close(gfid);
```

Create a UTM grid bounded by 54 E to 60 E longitude and 20 N to 30 N latitude. Divide the grid into 120 bins along the x-axis and 200 bins along the y-axis.

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
uplft = [210584.50041 3322395.95445];
lowrgt = [813931.10959 2214162.53278];
gridID = gd.create(gfid,'UTMGrid',120,200,uplft,lowrgt);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defProj` | `gd.detach` | `gd.gridInfo`

matlab.io.hdfeos.gd.defBoxRegion

Package: matlab.io.hdfeos.gd

Define region of interest by latitude and longitude

Syntax

```
regionID = defBoxRegion(gridID,cornerLat,cornerLon)
```

Description

`regionID = defBoxRegion(gridID,cornerLat,cornerLon)` defines a latitude-longitude box region as a subset region for a grid. `regionID` can be used to read all the entries of a data field within the region.

This function corresponds to the `GDdefboxregion` function in the HDF-EOS library C API.

Examples

Define a region of interest between 20 and 50 degrees latitude and between -90 and -60 degrees longitude.

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf','read');
gridID = gd.attach(gfid,'PolarGrid');
cornerlat = [20 50];
cornerlon = [-90 -60];
regionID = gd.defBoxRegion(gridID,cornerlat,cornerlon);
data = gd.extractRegion(gridID,regionID,'ice_temp');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.extractRegion`

matlab.io.hdfeos.gd.defComp

Package: matlab.io.hdfeos.gd

Set grid field compression

Syntax

```
defComp(gridID,compscheme,compparm)
```

Description

`defComp(gridID,compscheme,compparm)` sets the HDF field compression for subsequent field definitions. The compression scheme does not apply to one-dimensional fields. `compscheme` can be one of the following values.

`'rle'`	Run-length encoding
`'skphuff'`	Skipping Huffman
`'deflate'`	Gzip deflate
`'none'`	No compression

When the compression scheme is `'deflate'`, `compparm` is the deflate compression level, an integer between 0 and 9. `compparm` can be omitted for the other compression schemes.

If a field is defined with compression, it must be written with a single call to `gd.writeField`. If this is not possible, you should consider using tiling.

This function corresponds to the `GDdefcomp` function in the HDF-EOS library C API.

Examples

Create a grid with a polar stereographic `Pressure` field using run-length encoding, and then an `Opacity` field with deflate compression.

```
import matlab.io.hdfeos.*
```

```
gfid = gd.open('myfile.hdf','create');
gridID = gd.create(gfid,'PolarGrid',100,100,[],[]);
projparm = zeros(1,13);
projparm(6) = 90000000;
gd.defProj(gridID,'ps',[],'WGS 84',projparm);
dims = { 'XDim', 'YDim' };
gd.defComp(gridID,'rle');
gd.defField(gridID,'Pressure',dims,'float');
gd.defComp(gridID,'deflate',5);
gd.defField(gridID,'Opacity',dims,'float');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

gd.defField | gd.defTile

matlab.io.hdfeos.gd.defDim

Package: matlab.io.hdfeos.gd

Define new dimension within grid

Syntax

```
defDim(gridID,dimname,dimlen)
```

Description

`defDim(gridID,dimname,dimlen)` defines a new dimension named `dimname` with length `dimlen` in the grid structure identified by `gridID`.

To specify an unlimited dimension, you can use either 0 or `'unlimited'` for `dimlen`.

This function corresponds to the `GDdefdim` function in the HDF-EOS library C API.

Examples

Define a dimension `'Band'` with length of 15 and an unlimited dimension `'Time'`.

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
gridID = gd.create(gfid,'PolarGrid',100,100,[],[]);
gd.defDim(gridID,'Band',15);
gd.defDim(gridID,'Time',0);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defField` | `gd.dimInfo`

matlab.io.hdfeos.gd.defField

Package: matlab.io.hdfeos.gd

Define new data field within grid

Syntax

```
defField(gridID,fieldname,dimlist,dtype)
defField(gridID,fieldname,dimlist,dtype,mergeCode)
```

Description

`defField(gridID,fieldname,dimlist,dtype)` defines data fields for a grid specified by `gridID`. The `fieldname` input is the name of the new field. `dimlist` is a cell array of geolocation dimensions and should be listed in FORTRAN-style order, that is, the fastest varying dimension should be listed first. Specify `dimlist` as a cell array of character vectors containing text which describes the dimensions or just a character vector when there is only one dimension. `dtype` is the data type of the field.

`defField(gridID,fieldname,dimlist,dtype,mergeCode)` defines a data field with a specific merge code. `mergeCode` can be either `'nomerge'` or `'automerge'`. The `mergeCode` input defaults to `'nomerge'` if not provided.

This function corresponds to the `GDdeffield` function in the HDF library C API, but because MATLAB uses FORTRAN-style ordering, the `dimlist` parameter is reversed with respect to the C library API.

Examples

Define a single precision grid field `'Temperature'` with dimensions `'XDim'` and `'YDim'`. Then define a single precision field `'Spectra'` with dimensions `'XDim'`, `'YDim'`, and `'Bands'`.

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
```

```
xdim = 120; ydim = 200;
gridID = gd.create(gfid,'geo',xdim,ydim,[],[]);
gd.defProj(gridID,'geo',[],[],[]);
dimlist = {'XDim','YDim'};
gd.defField(gridID,'Temperature',dimlist,'single');
gd.defDim(gridID,'Bands',3);
dimlist = {'XDim','YDim','Bands'};
gd.defField(gridID,'Spectra',dimlist,'uint8');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.create` | `gd.defDim`

matlab.io.hdfeos.gd.defOrigin

Package: matlab.io.hdfeos.gd

Define origin of pixels in grid

Syntax

```
defOrigin(gridID,originCode)
```

Description

`defOrigin(gridID,originCode)` defines the origin of pixels in a grid. `gridID` is the identifier of the grid, and `originCode` can be one of the following four values.

`'ul'`	Upper-left
`'ur'`	Upper-right
`'ll'`	Lower-left
`'lr'`	Lower-right

You can select any corner of the grid pixel as the origin. If this routine is not invoked, the grid defaults to using the upper-left corner for the origin.

This function corresponds to the `GDdeforigin` function in the HDF-EOS library C API.

Examples

Create a polar stereographic grid with the origin of the grid pixel in the lower right corner.

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
gridID = gd.create(gfid,'PolarGrid',100,100,[],[]);
projparm = zeros(1,13);
projparm(6) = 90000000;
gd.defProj(gridID,'ps',[],'WGS 84',projparm);
```

```
gd.defOrigin(gridID,'lr');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

gd.defPixReg | gd.originInfo

matlab.io.hdfeos.gd.defPixReg

Package: matlab.io.hdfeos.gd

Define pixel registration within grid

Syntax

```
defPixReg(gridID,pixRegCode)
```

Description

`defPixReg(gridID,pixRegCode)` defines whether the pixel center or pixel corner is used when requesting the location (longitude and latitude) of a given pixel. `pixRegCode` can be one of the following values.

`'center'`	Center of pixel cell
`'corner'`	Corner of pixel cell

If this routine is not invoked, the pixel registration is `'center'`.

This function corresponds to the `GDdefpixreg` function in the HDF-EOS library.

Examples

Define a grid with pixel registration in the center.

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
gridID = gd.create(gfid,'PolarGrid',100,100,[],[]);
projparm = zeros(1,13);
projparm(6) = 90000000;
gd.defProj(gridID,'ps',[],'WGS 84',projparm);
gd.defPixReg(gridID,'corner');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defOrigin` | `gd.pixRegInfo`

matlab.io.hdfeos.gd.defProj

Package: matlab.io.hdfeos.gd

Define grid projection

Syntax

```
defProj(gridID,projCode,zoneCode,sphereCode,projParm)
```

Description

`defProj(gridID,projCode,zoneCode,sphereCode,projParm)` defines a GCTP projection on the grid specified by `gridID`. The `projCode` argument can be one of these values.

`'geo'`	Geographic
`'utm'`	Universal Transverse Mercator
`'albers'`	Albers Canonical Equal Area
`'lamcc'`	Lambert Conformal Conic
`'ps'`	Polar Stereographic
`'polyc'`	Polyconic
`'tm'`	Transverse Mercator
`'lamaz'`	Lambert Azimuthal Equal Area
`'snsoid'`	Sinusoidal
`'hom'`	Hotine Oblique Mercator
`'som'`	Space Oblique Mercator
`'good'`	Interrupted Goode Homolosine
`'cea'`	Cylindrical Equal Area
`'bcea'`	Behrmann Cylindrical Equal Area
`'isinus'`	Integerized Sinusoidal

If `projCode` is `'geo'`, then `zoneCode`, `sphereCode`, and `projParm` should be specified as `[]`. Any other values for these parameters are ignored.

`zoneCode` is the Universal Transverse Mercator zone code. It should be specified as -1 for other projections.

`sphereCode` is the name of the GCTP spheroid or the corresponding numeric code.

`projParm` is a vector of up to 13 elements containing projection-specific parameters. For more details about `projCode`, `zoneCode`, `sphereCode`, and `projParm`, see Chapter 6 of HDF-EOS Library Users Guide for the ECS Project, Volume 1: Overview and Examples.

This function corresponds to the `GDdefproj` function in the HDF library C API.

Examples

Create a UTM grid bounded by 54 E to 60 E longitude and 20 N to 30 N latitude (zone 40). Divide the grid into 120 bins along the x-axis and 200 bins along the y-axis.

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
uplft = [210584.50041 3322395.95445];
lowrgt = [813931.10959 2214162.53278];
gridID = gd.create(gfid,'UTMGrid',120,200,uplft,lowrgt);
gd.defProj(gridID,'utm',40,'Clarke 1866',[]);
gd.detach(gridID);
gd.close(gfid);
```

Add a polar stereographic projection of the northern hemisphere with true scale at 90 N, 0 longitude below the pole using the WGS 84 spheroid.

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
gridID = gd.create(gfid,'PolarGrid',100,100,[],[]);
projparm = zeros(1,13);
projparm(6) = 90000000;
gd.defProj(gridID,'ps',[],'WGS 84',projparm);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.create` | `gd.projInfo` | `gd.sphereCodeToName`

matlab.io.hdfeos.gd.defTile

Package: matlab.io.hdfeos.gd

Define tiling parameters

Syntax

```
defTile(gridID,tileDims)
```

Description

`defTile(gridID,tileDims)` defines tiling dimensions for subsequent field definitions. If `tileDims` is `[]`, then subsequently defined fields will have no tiling.

This function corresponds to the `GDdeftile` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `tileDims` parameter is reversed with respect to the C library API.

Examples

Define a field with tiling, then a subsequent field with no tiling.

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
gridID = gd.create(gfid,'GeoGrid',120,200,[],[]);
gd.defDim(gridID,'Bands',3);
gd.defProj(gridID,'geo',[],[],[]);
gd.defTile(gridID,[30 50 1]);
dimlist = {'XDim','YDim','Bands'};
gd.defField(gridID,'Spectra',dimlist,'float');
gd.defTile(gridID,[]);
dimlist = {'XDim','YDim'};
gd.defField(gridID,'Temperature',dimlist,'int32');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defField` | `gd.tileInfo`

matlab.io.hdfeos.gd.defVrtRegion

Package: matlab.io.hdfeos.gd

Define vertical subset region

Syntax

```
out_RID = defVrtRegion(gridID,regionID,vobj,vRange)
```

Description

`out_RID = defVrtRegion(gridID,regionID,vobj,vRange)` defines a vertical subset region and can be used on either a monotonic field or contiguous elements of a dimension.

`regionID` should be `'noprevsub'` if no prior subsetting has occurred. Otherwise it should be a value as returned from a previous subsetting routine.

`vobj` is the name of either the dimension or field to subset. If `vobj` is a dimension, it should be prefixed with `'DIM:'`.

`vRange` is the minimum and maximum range for the vertical subset.

This function corresponds to the `GDdefvrtregion` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
range = [333 667];
regionID = gd.defVrtRegion(gridID,'noprevsub','Height',range);
data = gd.extractRegion(gridID,regionID,'pressure');
gd.detach(gridID);
gd.close(gfid);
```

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
range = [3 5];
regionID = gd.defVrtRegion(gridID,'noprevsub','DIM:Height',range);
data = gd.extractRegion(gridID,regionID,'pressure');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

gd.extractRegion

matlab.io.hdfeos.gd.detach

Package: matlab.io.hdfeos.gd

Detach from existing grid

Syntax

```
detach(gridID)
```

Description

`detach(gridID)` detaches from the grid identified by `gridID`.

This function corresponds to the `GDdetach` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfID = gd.open('grid.hdf');
gridID = gd.attach(gfID,'PolarGrid');
gd.detach(gridID);
gd.close(gfID);
```

See Also

See Also

`gd.attach`

matlab.io.hdfeos.gd.dimInfo

Package: matlab.io.hdfeos.gd

Length of dimension

Syntax

```
dimlen = diminfo(gridID,dimname)
```

Description

`dimlen = diminfo(gridID,dimname)` retrieves the length of the specified user-defined dimension.

Please note that the two extents used to create the grid are not considered user-defined dimensions. To retrieve the length of `XDim` and `YDim`, use `gd.gridInfo`. This function corresponds to the `GDdiminfo` function in the HDF-EOS library C API.

Examples

Inquire about a `'Bands'` dimension.

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
dimlen = gd.dimInfo(gridID,'Height');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defDim` | `gd.gridInfo`

matlab.io.hdfeos.gd.extractRegion

Package: matlab.io.hdfeos.gd

Read region of interest from field

Syntax

```
data = extractRegion(gridID,regionID,fieldname)
```

Description

`data = extractRegion(gridID,regionID,fieldname)` extract data from a subsetted region.

This routine corresponds to the `GDextractregion` function in the HDF-EOS library C API.

Examples

Define and extract a region of interest between 20 and 50 degrees latitude and between -90 and -60 degrees longitude.

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf','read');
gridID = gd.attach(gfid,'PolarGrid');
cornerlat = [20 50];
cornerlon = [-90 -60];
regionID = gd.defBoxRegion(gridID,cornerlat,cornerlon);
data = gd.extractRegion(gridID,regionID,'ice_temp');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defBoxRegion` | `gd.defVrtRegion`

matlab.io.hdfeos.gd.fieldInfo

Package: matlab.io.hdfeos.gd

Information about data field

Syntax

```
[dims,ntype,dimlist] = fieldInfo(gridID,fieldname)
```

Description

`[dims,ntype,dimlist] = fieldInfo(gridID,fieldname)` returns information about a specific geolocation or data field in the grid. `dims` is a vector containing the dimension sizes of the field. `ntype` is a character vector containing the HDF number type of the field. `dimlist` is a cell array of character vectors containing the dimension names.

This function corresponds to the `GDfieldinfo` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `dimlist` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf','read');
gridID = gd.attach(gfid,'PolarGrid');
[dims,ntype,dimlist] = gd.fieldInfo(gridID,'ice_temp');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defField`

matlab.io.hdfeos.gd.getFillValue

Package: matlab.io.hdfeos.gd

Fill value for specified field

Syntax

```
fillvalue = getFillValue(gridID,fieldname)
```

Description

`fillvalue = getFillValue(gridID,fieldname)` retrieves the fill value for the specified field.

This function corresponds to the `GDgetfillvalue` function in the HDF-EOS library C API.

Examples

Return the fill value for the `'ice_temp'` field in the `'PolarGrid'` grid.

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
fillvalue = gd.getFillValue(gridID,'ice_temp');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.setFillValue`

matlab.io.hdfeos.gd.getPixels

Package: matlab.io.hdfeos.gd

Pixel rows and columns for latitude/longitude pairs

Syntax

```
[row,col] = getPixels(gridID,lat,lon)
```

Description

`[row,col] = getPixels(gridID,lat,lon)` converts latitude/longitude pairs into zero-based pixel row and column coordinates. The origin is the upper left-hand corner of the grid pixel. If the latitude/longitude pairs are outside the grid, then `row` and `col` are -1.

This function corresponds to the `GDgetpixels` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf','read');
gridID = gd.attach(gfid,'PolarGrid');
cornerlat = [20 50];
cornerlon = [-90 -60];
[row,col] = gd.getPixels(gridID,cornerlat,cornerlon);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.getPixValues`

matlab.io.hdfeos.gd.getPixValues

Package: matlab.io.hdfeos.gd

Read data values for specified pixels

Syntax

```
data = getPixValues(gridID,rows,cols,fieldname)
```

Description

`data = getPixValues(gridID,rows,cols,fieldname)` reads data values for the pixels specified by the zero-based `rows` and `cols` coordinates. All entries along the non-geographic dimensions, i.e. NOT `XDim` and `YDim`, are returned.

This function corresponds to the `GDgetpixvalues` function in the HDF-EOS library C API.

Examples

Read the grid field's corner values.

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf','read');
gridID = gd.attach(gfid,'PolarGrid');
rows = [0 99 99  0];
cols = [0  0 99 99];
data = gd.getPixValues(gridID,rows,cols,'ice_temp');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defBoxRegion` | `gd.extractRegion` | `gd.getPixels` | `gd.readField`

matlab.io.hdfeos.gd.gridInfo

Package: matlab.io.hdfeos.gd

Position and size of grid

Syntax

```
[xDim,yDim,upLeft,lowRight] = gridInfo(gridID)
```

Description

`[xDim,yDim,upLeft,lowRight] = gridInfo(gridID)` returns the size of a grid as well as the upper left and lower right corners of the grid.

Note: `upLeft` and `lowRight` are in units of meters for all GCTP projections other than the geographic and bcea projections, which will have units of packed degrees.

This function corresponds to the `GDgridinfo` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
[xdimsize,ydimsize,upleft,lowright] = gd.gridInfo(gridID);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.create`

matlab.io.hdfeos.gd.ij2ll

Package: matlab.io.hdfeos.gd

Convert row and column space to latitude and longitude

Syntax

```
[lat,lon] = ij2ll(gridID,row,col)
```

Description

`[lat,lon] = ij2ll(gridID,row,col)` converts a grid's row and column coordinates to latitude and longitude in decimal degrees.

`row` and `col` are zero-based and defined such that `col` increases monotonically with the `XDim` dimension and `row` increases monotonically with the `YDim` dimension in the HD-EOS library.

This routine corresponds to the `GDij2ll` function in the HDF-EOS C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
[xdim,ydim] = gd.gridInfo(gridID);
r = 0:(xdim-1);
c = 0:(ydim-1);
[Col,Row] = meshgrid(c,r);
[lat,lon] = gd.ij2ll(gridID,Row,Col);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.ll2ij` | `gd.readField`

matlab.io.hdfeos.gd.inqAttrs

Package: matlab.io.hdfeos.gd

Names of grid attributes

Syntax

```
attrList = inqAttrs(gridID)
```

Description

`attrList = inqAttrs(gridID)` returns the list of grid attribute names. `attrList` is a cell array.

This function corresponds to the `GDinqattrs` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
attrList = gd.inqAttrs(gridID);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.readAttr` | `gd.writeAttr`

matlab.io.hdfeos.gd.inqDims

Package: matlab.io.hdfeos.gd

Information about dimensions defined in grid

Syntax

```
[dimnames,dimlens] = inqDims(gridID)
```

Description

`[dimnames,dimlens] = inqDims(gridID)` returns the names of the dimensions `dimnames` in a cell array and their respective lengths `dimlens`. This does not include the grid extent dimensions `XDim` and `YDim`.

This function corresponds to the `GDinqdims` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `dimnames` and `dimlens` parameters are reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf','read');
gridID = gd.attach(gfid,'PolarGrid');
[dims,dimlens] = gd.inqDims(gridID);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defDim`

matlab.io.hdfeos.gd.inqFields

Package: matlab.io.hdfeos.gd

Information about data fields defined in grid

Syntax

```
[fldList,fldRank,fldType] = inqFields(gridID)
```

Description

`[fldList,fldRank,fldType] = inqFields(gridID)` returns the list of fields `fldList` as a cell array. `fldRank` contains the rank of each data field. `fldType` is a cell array containing the data type of each data field.

This function corresponds to the `GDinqfields` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
[fldlist,fldrank,fldtype] = gd.inqFields(gridID);
gd.detach(gridID);
gd.close(gfid);
for j = 1:numel(fldrank)
    fprintf('%s: Rank %d, datatype %s\n', fldlist{j},fldrank(j),fldtype{j});
end
```

See Also

See Also

`gd.defField`

matlab.io.hdfeos.gd.inqGrid

Package: matlab.io.hdfeos.gd

Names of grids in file

Syntax

```
grids = inqGrid(filename)
```

Description

`grids = inqGrid(filename)` returns the names of all grids in the given file. `grids` is a cell array.

This function corresponds to the `GDinqgrid` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
grids = gd.inqGrid('grid.hdf');
```

See Also

See Also

`gd.create` | `sw.inqSwath`

matlab.io.hdfeos.gd.interpolate

Package: matlab.io.hdfeos.gd

Bilinear interpolation on a grid field

Syntax

```
data = interpolate(gridID,lat,lon,fieldname)
```

Description

`data = interpolate(gridID,lat,lon,fieldname)` performs bilinear interpolation on lat/lon pairs from the data in the grid field.

`data` contains the interpolated field values.

This function corresponds to the `GDinterpolate` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('example.hdf');
gridID = gd.attach(gfid,'MonthlyRain');
[lat,lon] = gd.ij2ll(gridID,[36 36],[14 15]);
data = gd.interpolate(gridID,lat,lon,'TbOceanRain');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.ij2ll`

matlab.io.hdfeos.gd.ll2ij

Package: matlab.io.hdfeos.gd

Convert latitude and longitude to row and column space

Syntax

```
[row,col] = ll2ij(gridID,lat,lon)
```

Description

`[row,col] = ll2ij(gridID,lat,lon)` converts latitude and longitude coordinates to a pre-defined grid's row and column coordinates.

`row` and `col` are zero-based and defined such that `col` increases monotonically with the `XDim` dimension and `row` increases monotonically with the `YDim` dimension in the HD-EOS library.

This routine corresponds to the `GDll2ij` function in the HDF-EOS C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
lat = [46 46 42 42];
lon = [-71 -67 -67 -71];
[row,col] = gd.ll2ij(gridID,lat,lon);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.ij2ll`

matlab.io.hdfeos.gd.nEntries

Package: matlab.io.hdfeos.gd

Number of specified objects

Syntax

```
nentries = nEntries(gridID,entType)
```

Description

`nentries = nEntries(gridID,entType)` returns the number of specified objects in a grid. `entType` can be either `'dims'` or `'fields'`.

This function corresponds to the `GDnentries` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
fid = gd.open('grid.hdf');
gridID = gd.attach(fid,'PolarGrid');
ndims = gd.nEntries(gridID,'dims');
nflds = gd.nEntries(gridID,'fields');
gd.detach(gridID);
gd.close(fid);
fprintf('The number of dimensions is %d.\n', ndims);
fprintf('The number of fields is %d.\n', nflds);
```

See Also

See Also

`gd.inqGrid`

matlab.io.hdfeos.gd.open

Package: matlab.io.hdfeos.gd

Open grid file

Syntax

```
gfid = open(filename,access)
```

Description

`gfid = open(filename,access)` opens or creates an HDF-EOS grid file identified by `filename` and returns a file ID. `access` can be one of the following values:

`'read'`	Read-only
`'rdwr'`	Read-write
`'create'`	Creates a file, deleting it if it already exists

If `access` is not provided, it defaults to `'read'`.

This function corresponds to the `GDopen` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gd.close(gfid);
```

See Also

See Also

`gd.attach` | `gd.close`

matlab.io.hdfeos.gd.originInfo

Package: matlab.io.hdfeos.gd

Origin code

Syntax

```
originCode = originInfo(gridID)
```

Description

`originCode = originInfo(gridID)` retrieves the origin code for the grid specified by `gridID`. The `originCode` output is one of the following four values.

`'ul'`	Upper-left
`'ur'`	Upper-right
`'ll'`	Lower-left
`'lr'`	Lower-right

This function corresponds to the `GDorigininfo` routine in the HDF-EOS library.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
origin = gd.originInfo(gridID);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defOrigin`

matlab.io.hdfeos.gd.pixRegInfo

Package: matlab.io.hdfeos.gd

Pixel registration code

Syntax

```
pixRegCode = pixRegInfo(gridID)
```

Description

`pixRegCode = pixRegInfo(gridID)` retrieve the pixel registration code for the grid identified by `gridID`. The `pixRegCode` output can be one of the following values.

`'center'`	Center of pixel cell
`'corner'`	Corner of pixel cell

This function corresponds to the `GDpixreginfo` routine in the HDF-EOS library.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
code = gd.pixRegInfo(gridID);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defPixReg`

matlab.io.hdfeos.gd.projInfo

Package: matlab.io.hdfeos.gd

GCTP projection information about grid

Syntax

```
[projCode,zoneCode,sphereName,projParm] = projInfo(gridID)
```

Description

`[projCode,zoneCode,sphereName,projParm] = projInfo(gridID)` returns the GCTP projection code, zone code, spheroid, and projection parameters for the grid identified by `gridID`.

`zoneCode` is -1 if `projCode` is anything other than `'UTM'`.

This function corresponds to the `GDprojinfo` function in the HDF-EOS library C API.

For details about the GCTP projection code, zone code, spheroid code, and projection parameters, please consult the HDF-EOS User's Guide.

Examples

```
import matlab.io.hdfeos.*
fid = gd.open('grid.hdf');
gridID = gd.attach(fid,'PolarGrid');
[projCode,zoneCode,sphereCode,projParm] = gd.projInfo(gridID);
gd.detach(gridID);
gd.close(fid);
```

See Also

See Also

`gd.defProj` | `gd.sphereCodeToName` | `gd.sphereNameToCode`

matlab.io.hdfeos.gd.readAttr

Package: matlab.io.hdfeos.gd

Read grid attribute

Syntax

```
data = readAttr(gridID,attrname)
```

Description

`data = readAttr(gridID,attrname)` reads a grid attribute.

This function corresponds to the `GDreadattr` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf','read');
gridID = gd.attach(gfid,'PolarGrid');
data = gd.readAttr(gridID,'creation_date');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.writeAttr`

matlab.io.hdfeos.gd.readBlkSomOffset

Package: matlab.io.hdfeos.gd

Read Block SOM offset

Syntax

```
offset = readBlkSomOffset(GID)
```

Description

`offset = readBlkSomOffset(GID)` reads the block SOM offset values, in pixels, from a standard SOM (Space Oblique Mercator) projection. `offset` is a vector of offset values for SOM projection data. This routine can only be used with grids that use the SOM projection.

This function corresponds to the `GDblkSOMoffset` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
lowright = [30521379.68485 1152027.64253];
upleft = [-11119487.42844 8673539.24806];
gridID = gd.create(gfid,'SOM',120,60,upleft,lowright);
projparm(1) = 6378137;
projparm(2) = 0.006694348;
projparm(4) = 98096360;  % 98.161 in DDDMMMSSS
projparm(5) = 87069061;  % 87.112 in DDDMMMSSS
projparm(9) = 0.068585416*1440;
projparm(10) = 0.0;
projparm(12) = 6;
gd.defProj(gridID,'som',[],[],projparm);
gd.writeBlkSomOffset(gridID,[5 10 12 8 2]);
gd.detach(gridID);
```

```
gd.close(gfid);
gfid = gd.open('myfile.hdf');
gridID = gd.attach(gfid,'SOM');
blk = gd.readBlkSomOffset(gridID);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

gd.writeBlkSomOffset

matlab.io.hdfeos.gd.readField

Package: matlab.io.hdfeos.gd

Read data from grid field

Syntax

```
data = readField(gridID,fieldname)
data = readField(gridID,fieldname,start,count)
data = readField(gridID,fieldname,start,count,stride)
[data,lat,lon] = readField( ___ )
```

Description

`data = readField(gridID,fieldname)` reads the entire grid field identified by `fieldname` in the grid identified by `gridID`.

`data = readField(gridID,fieldname,start,count)` reads a contiguous hyperslab of data from the field. `start` specifies the zero-based starting index of the hyperslab. `count` specifies the number of values to read along each dimension.

`data = readField(gridID,fieldname,start,count,stride)` reads a strided hyperslab of data from the field. `stride` specifies the inter-element spacing along each dimension.

`[data,lat,lon] = readField( ___ )` reads the data and the associated geo-coordinates from the grid field. This syntax is only allowed when the leading two dimensions of the grid are `'XDim'` and `'YDim'`.

This function corresponds to the `GDreadfield` function in the HDF-EOS library C API.

Examples

Read the data, latitude, and longitude for the `'ice_temp'` field.

```
import matlab.io.hdfeos.*
```

```
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
[data,lat,lon] = gd.readField(gridID,'ice_temp');
gd.detach(gridID);
gd.close(gfid);
```

Read only the first 4x4 hyperslab of data, latitude, and longitude for the `'ice_temp'` field.

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
[data2,lat2,lon2] = gd.readField(gridID,'ice_temp',[0 0], [4 4]);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.writeField`

matlab.io.hdfeos.gd.readTile

Package: matlab.io.hdfeos.gd

Read single tile of data from field

Syntax

```
data = readTile(gridID,fieldname,tileCoords)
```

Description

`data = readTile(gridID,fieldname,tileCoords)` reads a single of data from a field. If the data is to be read tile by tile, this routine is more efficient than `gd.readField`. In all other cases, use `gd.readField`. The `tileCoords` argument has the form `[rownum colnum]` and is defined in terms of the tile coordinates, not the data elements.

This function corresponds to the `GDreadtile` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `tileCoords` parameter is reversed with respect to the C library API.

Examples

Define a field with a 2-by-3 tiling scheme.

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf','read');
gridID = gd.attach(gfid,'PolarGrid');
for h = 0:9
    data = gd.readTile(gridID,'pressure',[0 0 h]);
end
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.tileInfo` | `gd.writeTile`

matlab.io.hdfeos.gd.regionInfo

Package: matlab.io.hdfeos.gd

Information about subsetted region

Syntax

```
[dims,upLeft,lowRight] = regionInfo(gridID,regionID,fieldname)
```

Description

`[dims,upLeft,lowRight] = regionInfo(gridID,regionID,fieldname)` returns the dimensions and corner points for the specified field of a subsetted region identified by `regionID` in the grid identified by `gridID`.

This function corresponds to the `GDregioninfo` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf','read');
gridID = gd.attach(gfid,'PolarGrid');
cornerlat = [20 50];
cornerlon = [-90 -60];
regionID = gd.defBoxRegion(gridID,cornerlat,cornerlon);
[dims,upleft,lowright] = gd.regionInfo(gridID,regionID,'ice_temp');
data = gd.extractRegion(gridID,regionID,'ice_temp');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defBoxRegion` | `gd.defVrtRegion`

matlab.io.hdfeos.gd.setFillValue

Package: matlab.io.hdfeos.gd

Set fill value for specified field

Syntax

```
setFillValue(gridID,fieldname,fillvalue)
```

Description

`setFillValue(gridID,fieldname,fillvalue)` sets the fill value for the specified field. The fill value should have the same data type as the field.

This function corresponds to the `GDsetfillvalue` function in the HDF-EOS library C API.

Examples

Create a new double-precision field with a fill value of -1.

```
import matlab.io.hdfeos.*
srcFile = fullfile(matlabroot,'toolbox','matlab','imagesci','grid.hdf');
copyfile(srcFile,'myfile.hdf');
fileattrib('myfile.hdf','+w');
gfid = gd.open('myfile.hdf','rdwr');
gridID = gd.attach(gfid,'PolarGrid');
gd.defComp(gridID,'none');
gd.defField(gridID,'newfield',{'XDim','YDim'},'double');
gd.setFillValue(gridID,'newfield',-1);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.getFillValue`

matlab.io.hdfeos.gd.setTileComp

Package: matlab.io.hdfeos.gd

Set tiling and compression for field with fill value

Syntax

```
setTileComp(gridID,fieldname,tilesize,compCode,compParm)
```

Description

`setTileComp(gridID,fieldname,tilesize,compCode,compParm)` sets the tiling and compression for a field that had a fill value. This function must be applied after `gd.defField` and `gd.setFillValue`. The `compCode` argument can be one of the following values.

`'rle'`	Run-length encoding
`'skphuff'`	Skipping Huffman
`'deflate'`	Deflate
`'none'`	No compression

`compParm` need only be specified when the compression scheme is `'deflate'`, and then must be an integer between 0 and 9.

This function corresponds to the `GDsettilecomp` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `tilesize` parameter is reversed with respect to the C library API.

Examples

Define a temperature field with a 2-by-2 tiling scheme, a fill value of -999, and deflate compression.

```
import matlab.io.hdfeos.*
```

```
gfid = gd.open('myfile.hdf','create');
upleft = [210584.50041 3322395.95445];
lowright = [813931.10959 2214162.53278];
gridID = gd.create(gfid,'UTMGrid',120,200,upleft,lowright);
spherecode = 0; zonecode = 40;
projparm = zeros(1,13);
gd.defProj(gridID,'utm',zonecode,spherecode,projparm);
gd.defDim(gridID,'Time',10);
gd.defField(gridID,'Pollution',{'XDim','YDim','Time'},'float');
gd.setFillValue(gridID,'Pollution',single(7));
gd.setTileComp(gridID,'Pollution',[40 20 1],'deflate',5);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

gd.defComp | gd.defTile

matlab.io.hdfeos.gd.sphereCodeToName

Package: matlab.io.hdfeos.gd

Name corresponding to GCTP sphere code

Syntax

```
name = sphereCodeToName(code)
```

Description

`name = sphereCodeToName(code)` returns the name for the spheroid corresponding to the spheroid code. The list of supported GCTP spheroids is as follows:

GCTP Spheroid Code	Spheroid Name
0	Clarke 1866
1	Clarke 1880
2	Bessel
3	International 1967
4	International 1909
5	WGS 72
6	Everest
7	WGS 66
8	GRS 1980
9	Airy
10	Modified Airy
11	Modified Everest
12	WGS 84
13	Southeast Asia
14	Australian National

GCTP Spheroid Code	Spheroid Name
15	Krassovsky
16	Hough
17	Mercury 1960
18	Modified Mercury 1968
19	Sphere of radius 6370997m
20	Sphere of radius 6371228m
21	Sphere of radius 6371007.181m

See Also

See Also

`gd.defProj` | `gd.sphereNameToCode`

matlab.io.hdfeos.gd.sphereNameToCode

Package: matlab.io.hdfeos.gd

Numeric GCTP code corresponding to sphere name

Syntax

```
code = sphereCodeToName(name)
```

Description

`code = sphereCodeToName(name)` returns the numeric GCTP code corresponding to the named spheroid. The list of supported GCTP spheroids is as follows:

GCTP Spheroid Code	Spheroid Name
0	Clarke 1866
1	Clarke 1880
2	Bessel
3	International 1967
4	International 1909
5	WGS 72
6	Everest
7	WGS 66
8	GRS 1980
9	Airy
10	Modified Airy
11	Modified Everest
12	WGS 84
13	Southeast Asia
14	Australian National

GCTP Spheroid Code	Spheroid Name
15	Krassovsky
16	Hough
17	Mercury 1960
18	Modified Mercury 1968
19	Sphere of radius 6370997m
20	Sphere of radius 6371228m
21	Sphere of radius 6371007.181m

See Also

See Also

`gd.defProj` | `gd.sphereCodeToName`

matlab.io.hdfeos.gd.tileInfo

Package: matlab.io.hdfeos.gd

Tile size of grid field

Syntax

```
tileDims = tileInfo(gridID,fieldname)
```

Description

`tileDims = tileInfo(gridID,fieldname)` returns the tile dimensions of the field specified by `fieldname` in the grid specified by `gridID`. If the field is not tiled, then `tileDims` is `[]`.

This function corresponds to the `GDtileinfo` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `tileDims` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('grid.hdf');
gridID = gd.attach(gfid,'PolarGrid');
tileDims = gd.tileInfo(gridID,'pressure');
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.defTile`

matlab.io.hdfeos.gd.writeAttr

Package: matlab.io.hdfeos.gd

Write grid attribute

Syntax

```
writeAttr(gridID,attrname,data)
```

Description

`writeAttr(gridID,attrname,data)` writes an attribute to a grid. If the attribute does not exist, it is created. If the attribute exists, it can be modified in place, but it cannot be recreated with a different data type or length.

This function corresponds to the `GDwriteattr` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
srcFile = fullfile(matlabroot,'toolbox','matlab','imagesci','grid.hdf');
copyfile(srcFile,'myfile.hdf');
fileattrib('myfile.hdf','+w');
gfid = gd.open('myfile.hdf','rdwr');
gridID = gd.attach(gfid,'PolarGrid');
gd.writeAttr(gridID,'modification_date',datestr(now));
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

`gd.readAttr`

matlab.io.hdfeos.gd.writeBlkSomOffset

Package: matlab.io.hdfeos.gd

Write Block SOM offset

Syntax

```
writeBlkSomOffset(gridID,offset)
```

Description

`writeBlkSomOffset(gridID,offset)` writes the block SOM offset values n pixels for a standard Solar Oblique Mercator (SOM) projection. `offset` is a vector of offset values for SOM projection data. This routine can only be used with grids that use the SOM projection. You must take care to use this function properly in conjunction with `gd.defProj`. The 12th element of the projection parameters must be set to the total number of blocks to be defined. `offset` starts by listing the offset to the second block, so the 12th element of the projection parameters is always one more than the length of `offset`.

All fields defined after writing the block SOM offset values will automatically include "SOMBlockDim" as the slowest varying dimension.

This function corresponds to the `GDblkSOMoffset` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
lowright = [30521379.68485 1152027.64253];
upleft = [-11119487.42844 8673539.24806];
gridID = gd.create(gfid,'SOM',120,60,upleft,lowright);
projparm(1) = 6378137;
projparm(2) = 0.006694348;
projparm(4) = 98096360;  % 98.161 in DDDMMMSSS
```

```
projparm(5) = 87069061;  % 87.112 in DDDMMMSSS
projparm(9) = 0.068585416*1440;
projparm(10) = 0.0;
projparm(12) = 6;
gd.defProj(gridID,'som',[],[],projparm);
gd.writeBlkSomOffset(gridID,[5 10 12 8 2]);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

gd.readBlkSomOffset

matlab.io.hdfeos.gd.writeField

Package: matlab.io.hdfeos.gd

Write data to grid field

Syntax

```
writeField(gridID,fieldname,data)
writeField(gridID,fieldname,start,data)
writeField(gridID,fieldname,start,stride,data)
```

Description

`writeField(gridID,fieldname,data)` writes all the data to a grid field. The field is identified by `fieldname` and the grid is identified by `gridID`.

`writeField(gridID,fieldname,start,data)` writes a contiguous hyperslab to the grid field. `start` specifies the zero-based starting index.

`writeField(gridID,fieldname,start,stride,data)` writes a strided hyperslab of data to a grid data field. `stride` specifies the inter-element spacing along each dimension. The number of elements to write along each dimension is inferred from the size of `data`.

This function corresponds to the `GDwritefield` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `start` and `stride` parameters are reversed with respect to the C library API.

Examples

Write all the data to a grid field.

```
import matlab.io.hdfeos.*
srcFile = fullfile(matlabroot,'toolbox','matlab','imagesci','grid.hdf');
copyfile(srcFile,'myfile.hdf');
fileattrib('myfile.hdf','+w');
```

```
gfid = gd.open('myfile.hdf','rdwr');
gridID = gd.attach(gfid,'PolarGrid');
data = zeros(100,100,'uint16');
gd.writeField(gridID,'ice_temp',data);
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

gd.readField

matlab.io.hdfeos.gd.writeTile

Package: matlab.io.hdfeos.gd

Write tile to field

Syntax

```
writeTile(gridID,fieldname,tileCoords,data)
```

Description

`writeTile(gridID,fieldname,tileCoords,data)` writes a single tile of data to a field. If the field data can be arranged tile by tile, this routine is more efficient than `gd.writeField`. In all other cases, use `gd.writeField`. The `tileCoords` argument has the form `[rownum colnum]` and is defined in terms of the tile coordinates, not the data elements.

This function corresponds to the `GDwritetile` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `tileCoords` parameter is reversed with respect to the C library API.

Examples

Define a field with a 2-by-3 tiling scheme.

```
import matlab.io.hdfeos.*
gfid = gd.open('myfile.hdf','create');
xdim = 200; ydim = 180;
gridID = gd.create(gfid,'PolarGrid',xdim,ydim,[],[]);
zonecode = 40;
spherecode = 0;
projParm = zeros(1,13);
projParm(6) =  90000000;
gd.defProj(gridID,'ps',[],spherecode,projParm);
tileSize = [100 60];
gd.defTile(gridID,tileSize);
```

```
dimlist = {'XDim','YDim'};
gd.defField(gridID,'Pressure',dimlist,'int32');
for c = 0:2
    for r = 0:1
        data = (r+c)*ones(tileSize,'int32');
        gd.writeTile(gridID,'Pressure',[r c],data);
    end
end
gd.detach(gridID);
gd.close(gfid);
```

See Also

See Also

gd.readTile

matlab.io.hdfeos.sw

Low-level access to HDF-EOS swath files

Description

To use these MATLAB functions, you must be familiar with the HDF-EOS library C interface. In most cases, the syntax of the MATLAB function is similar to the syntax of the corresponding HDF-EOS library function. The functions are implemented as the package `matlab.io.hdfeos.sw`. To use this package, prefix the function name with a package path, or use the import function to add the package to the current import list, prior to calling the function, for example,

```
import matlab.io.hdfeos.*
fileId = sw.open(filename);
```

Access

matlab.io.hdfeos.sw.attach	Attach to swath data set
matlab.io.hdfeos.sw.close	Close swath file
matlab.io.hdfeos.sw.create	Create new swath structure
matlab.io.hdfeos.sw.detach	Detach from swath
matlab.io.hdfeos.sw.open	Open swath file

Definition

matlab.io.hdfeos.sw.defComp	Set grid field compression
matlab.io.hdfeos.sw.defDataField	Define new data field within swath
matlab.io.hdfeos.sw.defDim	Define new dimension within swath
matlab.io.hdfeos.sw.defDimMap	Define mapping between geolocation and data dimensions
matlab.io.hdfeos.sw.defGeoField	Define new data field within swath

Basic I/O

matlab.io.hdfeos.sw.getFillValue	Fill value for specified field
matlab.io.hdfeos.sw.readAttr	Read swath attribute
matlab.io.hdfeos.sw.readField	Read data from swath field
matlab.io.hdfeos.sw.setFillValue	Set fill value for the specified field
matlab.io.hdfeos.sw.writeAttr	Write swath attribute
matlab.io.hdfeos.sw.writeField	Write data to swath field

Inquiry

matlab.io.hdfeos.sw.compInfo	Compression information for field
matlab.io.hdfeos.sw.dimInfo	Size of dimension
matlab.io.hdfeos.sw.fieldInfo	Information about swath field
matlab.io.hdfeos.sw.geoMapInfo	Type of dimension mapping for named dimension
matlab.io.hdfeos.sw.idxMapInfo	Indexed array of geolocation mapping
matlab.io.hdfeos.sw.inqAttrs	Names of swath attributes
matlab.io.hdfeos.sw.inqDataFields	Information about geolocation fields
matlab.io.hdfeos.sw.inqDims	Information about dimensions defined in swath
matlab.io.hdfeos.sw.inqGeoFields	Information about geolocation fields
matlab.io.hdfeos.sw.inqIdxMaps	Information about swath indexed geolocation mapping
matlab.io.hdfeos.sw.inqMaps	Information about swath geolocation relations
matlab.io.hdfeos.sw.inqSwath	Names of swaths in file

matlab.io.hdfeos.sw.mapInfo	Offset and increment of specific geolocation mapping
matlab.io.hdfeos.sw.nEntries	Number of entries for specific type

Subsetting

matlab.io.hdfeos.sw.defBoxRegion	Define latitude-longitude region for swath
matlab.io.hdfeos.sw.defTimePeriod	Define time period of interest
matlab.io.hdfeos.sw.defVrtRegion	Subset on monotonic field or dimension
matlab.io.hdfeos.sw.extractPeriod	Read data from subsetted time period
matlab.io.hdfeos.sw.extractRegion	Read subsetted region
matlab.io.hdfeos.sw.periodInfo	Information about subsetted period
matlab.io.hdfeos.sw.regionInfo	Information about subsetted region

matlab.io.hdfeos.sw.attach

Package: matlab.io.hdfeos.sw

Attach to swath data set

Syntax

```
swathID = attach(swfID,swathname)
```

Description

`swathID = attach(swfID,swathname)` attaches to the swath identified by `swathname` in the file identified by `swfID`. The `swathID` output is the identifier for the named swath.

This function corresponds to the `SWattach` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.detach`

matlab.io.hdfeos.sw.close

Package: matlab.io.hdfeos.sw

Close swath file

Syntax

```
close(swfID)
```

Description

`close(swfID)` closes an HDF-EOS swath file identified by `swfID`.

This function corresponds to the `SWclose` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
swathID = sw.create(swfid,'ExampleSwath');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.create` | `sw.open`

matlab.io.hdfeos.sw.compInfo

Package: matlab.io.hdfeos.sw

Compression information for field

Syntax

```
[code,parms] = compInfo(swathID,fieldname)
```

Description

`[code,parms] = compInfo(swathID,fieldname)` returns the compression code and compression parameters for a given field. Refer to `sw.defComp` for a description of various compression schemes and parameters.

This function corresponds to the `SWcompinfo` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
[compCode,parms] = sw.compInfo(swathID,'Spectra');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defComp`

matlab.io.hdfeos.sw.create

Package: matlab.io.hdfeos.sw

Create new swath structure

Syntax

```
swathID = create(swfID,swathname)
```

Description

`swathID = create(swfID,swathname)` creates a new swath structure where `swfID` is the swath file identifier and `swathname` is the name of the new swath. The swath is created as a Vgroup with the HDF file with the name `swathname` and HDF Vgroup class `'SWATH'`.

This function corresponds to the `SWcreate` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
swathID = sw.create(swfid,'ExampleSwath');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.detach`

matlab.io.hdfeos.sw.defBoxRegion

Package: matlab.io.hdfeos.sw

Define latitude-longitude region for swath

Syntax

```
regionID = defBoxRegion(swathID,lat,lon,mode)
```

Description

`regionID = defBoxRegion(swathID,lat,lon,mode)` defines a latitude-longitude box region for a swath. `lat` and `lon` are two-element arrays containing the latitude and longitude in decimal degrees of the box corners. A cross track is determined to be within the box if a condition is met according to the value of `mode`:

`'MIDPOINT'`	The cross track midpoint is within the box.
`'ENDPOINT'`	Either endpoint is within the box.
`'ANYPOINT'`	Any point of the cross track is within the box.

All elements of a cross track are within the region if the condition is met. The swath must have both Longitude and Latitude (or Colatitude) defined.

`regionID` is an identifier to be used by `sw.extractRegion` to read all the entries of a data field within the region.

This function corresponds to the `SWdefboxregion` and `SWregionindex` functions in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
lat = [34 44];
```

```
lon = [16 24];
regionID = sw.defBoxRegion(swathID,lat,lon,'MIDPOINT');
data = sw.extractRegion(swathID,regionID,'Temperature');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

sw.extractRegion

matlab.io.hdfeos.sw.defComp

Package: matlab.io.hdfeos.sw

Set grid field compression

Syntax

```
defComp(swathID,compscheme,compparm)
```

Description

`defComp(swathID,compscheme,compparm)` sets the field compression for subsequent definitions. The compression scheme does not apply to one-dimensional fields. `compscheme` can be one of the following strings.

`'rle'`	Run-length encoding
`'skphuff'`	Skipping Huffman
`'deflate'`	Gzip compression
`'none'`	No compression

When the compression scheme is `'deflate'`, the `compparm` input is the deflate compression level, an integer between 0 and 9. `compparm` can be omitted for the other compression schemes.

Fields defined with compression must be written with a single call to `sw.writeField`.

This function corresponds to the `SWdefcomp` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
swathID = sw.create(swfid,'MySwath');
sw.defDim(swathID,'Track',4000);
```

```
sw.defDim(swathID,'Xtrack',2000);
sw.defDim(swathID,'Bands',3);
sw.defComp(swathID,'rle');
dims = {'Xtrack','Track'};
sw.defDataField(swathID,'Pressure',dims,'float');
sw.defComp(swathID,'deflate',5);
sw.defDataField(swathID,'Opacity',dims,'float');
sw.defComp(swathID,'skphuff');
dims = {'Xtrack','Track','Bands'};
sw.defDataField(swathID,'Spectra',dims,'float');
sw.defComp(swathID,'none');
dims = {'Xtrack','Track'};
sw.defDataField(swathID,'Temperature',dims,'float');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.compInfo`

matlab.io.hdfeos.sw.defDataField

Package: matlab.io.hdfeos.sw

Define new data field within swath

Syntax

```
defDataField(swathID,fieldname,dimlist,dtype)
defDataField(swathID,fieldname,dimlist,dtype,mergeCode)
```

Description

`defDataField(swathID,fieldname,dimlist,dtype)` defines a data field to be stored in the swath identified by `swathID`. The `dimlist` input can be a cell array of dimension names, or a single char if there is only one dimension. `dtype` is the data type of the field and can be one of the following values.

- `'double'`
- `'single'`
- `'int32'`
- `'uint32'`
- `'int16'`
- `'uint16'`
- `'int8'`
- `'uint8'`
- `'char'`

`dimlist` should be ordered such that the fastest varying dimension is listed first. This is opposite from the order in which the dimensions are listed in the C API.

`defDataField(swathID,fieldname,dimlist,dtype,mergeCode)` defines a data field that can be merged with other data fields according to the value of `mergeCode`. The `mergeCode` input can be `'automerge'` or `'nomerge'`. If `mergeCode` is `'automerge'`, then the HDF-EOS library will attempt to merge swath fields into a single object. This

should not be done if you wish to access the swath fields individually with the another interface. By default, `mergeCode` is `'nomerge'`.

Note: To assure that the fields defined by `sw.defDataField` are properly established in the file, the swath should be detached and then reattached before writing to any fields.

This function corresponds to the `SWdefdatafield` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `dimlist` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
swathID = sw.create(swfid,'MySwath');
sw.defDim(swathID,'GeoTrack',2000);
sw.defDim(swathID,'GeoXtrack',1000);
sw.defDim(swathID,'DataTrack',4000);
sw.defDim(swathID,'DataXtrack',2000);
sw.defDim(swathID,'Bands',3);
sw.defDimMap(swathID,'GeoTrack','DataTrack',0,2);
sw.defDimMap(swathID,'GeoXtrack','DataXtrack',1,2);
dims = {'GeoXtrack','GeoTrack'};
sw.defGeoField(swathID,'Longitude',dims,'float');
sw.defGeoField(swathID,'Latitude',dims,'float');
dims = {'DataXtrack','DataTrack','Bands'};
sw.defDataField(swathID,'Spectra',dims,'float');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defGeoField` | `sw.inqDataFields`

matlab.io.hdfeos.sw.defDim

Package: matlab.io.hdfeos.sw

Define new dimension within swath

Syntax

```
defDim(swathID,dimname,dimlen)
```

Description

`defDim(swathID,dimname,dimlen)` defines a new dimension named `dimname` with length `dimlen` in the swath structure identified by `swathID`.

To specify an unlimited dimension, use either 0 or `'unlimited'` for `dimlen`.

This function corresponds to the `SWdefdim` function in the HDF-EOS library.

Examples

Define a dimension `'Band'` with length of 15 and an unlimited dimension `'Time'`.

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
swathID = sw.create(swfid,'MySwath');
sw.defDim(swathID,'GeoTrack',2000);
sw.defDim(swathID,'GeoXtrack',1000);
sw.defDim(swathID,'DataTrack',4000);
sw.defDim(swathID,'DataXtrack',2000);
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.dimInfo`

matlab.io.hdfeos.sw.defDimMap

Package: matlab.io.hdfeos.sw

Define mapping between geolocation and data dimensions

Syntax

```
defDimMap(swathID,geoDim,dataDim,offset,increment)
```

Description

`defDimMap(swathID,geoDim,dataDim,offset,increment)` defines a monotonic mapping between the geolocation and data dimensions, which usually have differing lengths. `offset` gives the index of the data element corresponding to the first geolocation element, and `increment` gives the number of data elements to skip for each geolocation element. If the geolocation dimension begins "before" the data dimension, then `offset` is negative. Similarly, if the geolocation dimension has higher resolution than the data dimension, then `increment` is negative.

This function corresponds to the `SWdefdimmap` function in the HDF-EOS library.

Examples

Create a dimension mapping such that the first element of the GeoTrack dimension corresponds to the first element of the DataTrack Dimension and such that the data dimension has twice the resolution as the geolocation dimension. Also create a dimension mapping such that the first element of the GeoXtrack dimension corresponds to the second element of the DataXtrack dimensions and such that the data dimension has twice the resolution as the geolocation dimension.

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
swathID = sw.create(swfid,'MySwath');
sw.defDim(swathID,'GeoTrack',2000);
sw.defDim(swathID,'GeoXtrack',1000);
sw.defDim(swathID,'DataTrack',4000);
```

```
sw.defDim(swathID,'DataXtrack',2000);
sw.defDimMap(swathID,'GeoTrack','DataTrack',0,2);
sw.defDimMap(swathID,'GeoXtrack','DataXtrack',1,2);
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

sw.defDim | sw.mapInfo

matlab.io.hdfeos.sw.defGeoField

Package: matlab.io.hdfeos.sw

Define new data field within swath

Syntax

```
defGeoField(swathID,fieldname,dimlist,dtype)
defGeoField(swathID,fieldname,dimlist,dtype,mergeCode)
```

Description

`defGeoField(swathID,fieldname,dimlist,dtype)` defines a geolocation field to be stored in the swath identified by `swathID`. The `dimlist` argument can be a cell array of dimension names or a single char if there is only one dimension. `dtype` is the data type of the field

`dimlist` should be ordered such that the fastest varying dimension is listed first. This is opposite from the order in which the dimensions are listed in the C API.

`defGeoField(swathID,fieldname,dimlist,dtype,mergeCode)` defines a geolocation field that may be merged with other geolocation fields according to the value of `mergeCode`. The `mergeCode` argument can `'automerge'` or `'nomerge'`. If `mergeCode` is `'automerge'`, then the HDF-EOS library will attempt to merge swath fields into a single object. This should not be done if you wish to access the swath fields individually with the another interface. By default, `mergeCode` is `'nomerge'`.

This function corresponds to the `SWdefgeofield` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `dimlist` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
```

```
swathID = sw.create(swfid,'MySwath');
sw.defDim(swathID,'GeoTrack',2000);
sw.defDim(swathID,'GeoXtrack',1000);
sw.defDim(swathID,'DataTrack',4000);
sw.defDim(swathID,'DataXtrack',2000);
sw.defDimMap(swathID,'GeoTrack','DataTrack',0,2);
sw.defDimMap(swathID,'GeoXtrack','DataXtrack',1,2);
dims = {'GeoXtrack','GeoTrack'};
sw.defGeoField(swathID,'Longitude',dims,'float');
sw.defGeoField(swathID,'Latitude',dims,'float');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

sw.defDataField | sw.inqGeoFields

matlab.io.hdfeos.sw.defTimePeriod

Package: matlab.io.hdfeos.sw

Define time period of interest

Syntax

```
outpID = defTimePeriod(swathID,start,stop,mode)
```

Description

`outpID = defTimePeriod(swathID,start,stop,mode)` defines a time period for a swath. `outpID` is a swath period ID that can be used to read all the entries of a data field within the time period. The swath structure must have the `'Time'` field defined. A cross track is within a time period if a condition is met according to the value of `mode`:

`'MIDPOINT'`	The midpoint is within the time period.
`'ENDPOINT'`	Either endpoint is within the time period.

This function corresponds to the `SWdeftimeperiod` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
starttime =  25;
stoptime = 425;
periodID = sw.defTimePeriod(swathID,starttime,stoptime,'MIDPOINT');
data = sw.extractPeriod(swathID,periodID,'Temperature');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defBoxRegion` | `sw.defVrtRegion` | `sw.extractPeriod`

matlab.io.hdfeos.sw.defVrtRegion

Package: matlab.io.hdfeos.sw

Subset on monotonic field or dimension

Syntax

```
regionID_out = defVrtRegion(swathID,regionID,vertObj,range)
```

Description

`regionID_out = defVrtRegion(swathID,regionID,vertObj,range)` subsets on a monotonic field or contiguous elements of a dimension. Whereas `defBoxRegion` and `defTimePeriod` subset along the `'Track'` dimension, this routine allows the user to subset along any dimension. `regionID` specifies the subsetted region from a previous call. `vertObj` specifies the dimension by which to subset. `range` specifies the minimum and maximum values for `vertObj`.

If there is no current subsetted region, `regionID` should be `'noprevsub'`.

`vertObj` can be either a dimension or a field. If it is a dimension, then `range` should consist of dimension indices. If `vertObj` corresponds to a field, then `range` should consist of the minimum and maximum field values. `vertObj` must be one-dimensional in this case, and the its values must be monotonic.

This function corresponds to the `SWdefvrtregion` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
regionID = sw.defVrtRegion(swathID,'noprevsub','Bands',[450 600]);
data = sw.extractRegion(swathID,regionID,'Spectra');
sw.detach(swathID);
```

```
sw.close(swfid);
```

See Also

See Also

sw.defBoxRegion | sw.defTimePeriod

matlab.io.hdfeos.sw.detach

Package: matlab.io.hdfeos.sw

Detach from swath

Syntax

```
detach(swathID)
```

Description

`detach(swathID)` detaches from the swath identified by `swathID`.

This function corresponds to the `SWdetach` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.attach` | `sw.create`

matlab.io.hdfeos.sw.dimInfo

Package: matlab.io.hdfeos.sw

Size of dimension

Syntax

```
dimlen = dimInfo(swathID,dimname)
```

Description

`dimlen = dimInfo(swathID,dimname)` returns the length of the specified dimension.

This function corresponds to the `SWdiminfo` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
dimlen = sw.dimInfo(swathID,'GeoTrack');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defDim`

matlab.io.hdfeos.sw.extractPeriod

Package: matlab.io.hdfeos.sw

Read data from subsetted time period

Syntax

```
data = extractPeriod(swathID,periodID,fieldname)
```

Description

`data = extractPeriod(swathID,periodID,fieldname)` reads data for the given field for the time period specified by `periodID`.

This routine corresponds to the `SWextractperiod` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
starttime =  25;
stoptime = 425;
periodID = sw.defTimePeriod(swathID,starttime,stoptime,'MIDPOINT');
data = sw.extractPeriod(swathID,periodID,'Temperature');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defTimePeriod`

matlab.io.hdfeos.sw.extractRegion

Package: matlab.io.hdfeos.sw

Read subsetted region

Syntax

```
data = extractRegion(swathID,regionID,fieldname)
```

Description

`data = extractRegion(swathID,regionID,fieldname)` reads data for a specified field from a subsetted region identified by `regionID`.

This function corresponds to the `SWextractregion` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
lat = [34 44];
lon = [16 24];
regionID = sw.defBoxRegion(swathID,lat,lon,'MIDPOINT');
data = sw.extractRegion(swathID,regionID,'Temperature');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defBoxRegion` | `sw.defVrtRegion`

matlab.io.hdfeos.sw.fieldInfo

Package: matlab.io.hdfeos.sw

Information about swath field

Syntax

```
[dimsizes,ntype,dimlist] = fieldInfo(swathID,fieldname)
```

Description

`[dimsizes,ntype,dimlist] = fieldInfo(swathID,fieldname)` returns the size, data type, and list of named dimensions for the specified swath geolocation or data field.

This function corresponds to the `SWfieldinfo` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `dimlist` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
[fieldSize,ntype,dimlist] = sw.fieldInfo(swathID,'Spectra');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.inqDataFields` | `sw.inqGeoFields`

matlab.io.hdfeos.sw.geoMapInfo

Package: matlab.io.hdfeos.sw

Type of dimension mapping for named dimension

Syntax

```
mappingType = geoMapInfo(swathID,dimname)
```

Description

`mappingType = geoMapInfo(swathID,dimname)` returns the type of dimension mapping for the named dimension. `mappingType` is one of `'indexed'`, `'regular'`, or `'unmapped'`.

This routine corresponds to the `SWgeomapinfo` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
maptype = sw.geoMapInfo(swathID,'GeoTrack');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defDimMap`

matlab.io.hdfeos.sw.getFillValue

Package: matlab.io.hdfeos.sw

Fill value for specified field

Syntax

```
fillvalue = getFillValue(swathID,fieldname)
```

Description

`fillvalue = getFillValue(swathID,fieldname)` returns the fill value for the specified field.

This function corresponds to the `SWgetfillvalue` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
fv = sw.getFillValue(swathID,'Spectra');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.setFillValue`

matlab.io.hdfeos.sw.idxMapInfo

Package: matlab.io.hdfeos.sw

Indexed array of geolocation mapping

Syntax

```
idx = idxMapInfo(swathID,geodim,datadim)
```

Description

`idx = idxMapInfo(swathID,geodim,datadim)` retrieves the indexed elements of the geolocation mapping between `geodim` and `datadim`.

This function corresponds to the `SWidxmapinfo` function in the HDF-EOS C library API.

See Also

See Also

`sw.geoMapInfo`

matlab.io.hdfeos.sw.inqAttrs

Package: matlab.io.hdfeos.sw

Names of swath attributes

Syntax

```
attrlist = inqAttrs(swathID)
```

Description

`attrlist = inqAttrs(swathID)` returns the list of swath attribute names. `attrlist` is a cell array.

This function corresponds to the `SWinqattrs` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
attrList = sw.inqAttrs(swathID);
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.readAttr` | `sw.writeAttr`

matlab.io.hdfeos.sw.inqDataFields

Package: matlab.io.hdfeos.sw

Information about geolocation fields

Syntax

```
[fields,rank,datatype] = inqDataFields(swathID)
```

Description

`[fields,rank,datatype] = inqDataFields(swathID)` returns the list of geolocation field names, the rank of each field, and the data type of each field.

This function corresponds to the `SWinqdatafields` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `fields` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
[fields,rank,datatype] = sw.inqDataFields(swathID);
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defDataField` | `sw.inqGeoFields`

matlab.io.hdfeos.sw.inqDims

Package: matlab.io.hdfeos.sw

Information about dimensions defined in swath

Syntax

```
[dimnames,dimlens] = inqDims(swathID)
```

Description

`[dimnames,dimlens] = inqDims(swathID)` returns the names of the dimensions `dimnames` as a cell array. The length of each respective dimension is returned in `dimlens`.

This function corresponds to the `SWinqdims` routine in the HDF-EOS library.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
[dimnames,dimlens] = sw.inqDims(swathID);
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defDim`

matlab.io.hdfeos.sw.inqGeoFields

Package: matlab.io.hdfeos.sw

Information about geolocation fields

Syntax

```
[fields,rank,datatype] = inqGeoFields(swathID)
```

Description

`[fields,rank,datatype] = inqGeoFields(swathID)` returns the list of geolocation fields `fields`, the rank of each field, and the data type of each field.

This function corresponds to the `SWinqgeofields` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `fields` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
[fields,rank,datatypes] = sw.inqGeoFields(swathID);
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defGeoField` | `sw.inqDataFields`

matlab.io.hdfeos.sw.inqIdxMaps

Package: matlab.io.hdfeos.sw

Information about swath indexed geolocation mapping

Syntax

```
[idxMap,idxSize] = inqIdxMaps(swathID)
```

Description

`[idxMap,idxSize] = inqIdxMaps(swathID)` retrieves all indexed geolocation/data mappings defined in the swath. `idxMap` is a cell array with each element consisting of the names of the dimensions of a mapping, separated by a `'/'`. `idxSize` contains the size of the index arrays corresponding to each mapping.

This function corresponds to the `SWinqidxmaps` routine in the HDF-EOS library.

See Also

See Also

`sw.inqMaps`

matlab.io.hdfeos.sw.inqMaps

Package: matlab.io.hdfeos.sw

Information about swath geolocation relations

Syntax

```
[map,offset,increment] = inqMaps(swathID)
```

Description

`[map,offset,increment] = inqMaps(swathID)` returns the dimension mapping list, the offset of each geolocation relation, and the increment of each geolocation relation. These mappings are not indexed. `map` is a cell array where each element contains the names of the dimensions for each mapping, separated by a slash. `offset` and `increment` contain the offset and increment of each geolocation relation.

This function corresponds to the `SWinqmaps` routine in the HDF-EOS library.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
[dimmap,offset,increment] = sw.inqMaps(swathID);
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defDimMap` | `sw.inqDims` | `sw.inqIdxMaps`

matlab.io.hdfeos.sw.inqSwath

Package: matlab.io.hdfeos.sw

Names of swaths in file

Syntax

```
swaths = inqSwath(filename)
```

Description

`swaths = inqSwath(filename)` returns a cell array containing the names of all the swaths in a file.

This function corresponds to the `SWinqswath` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swaths = sw.inqSwath('swath.hdf');
```

See Also

See Also

`gd.inqGrid`

matlab.io.hdfeos.sw.mapInfo

Package: matlab.io.hdfeos.sw

Offset and increment of specific geolocation mapping

Syntax

```
[offset,increment] = mapInfo(swathID,geodim,datadim)
```

Description

`[offset,increment] = mapInfo(swathID,geodim,datadim)` retrieves the offset and increment of the geolocation mapping between the specified geolocation dimension and the specified data dimension.

This function corresponds to the `SWmapinfo` function in the HDF-EOS C library API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
swathID = sw.create(swfid,'MySwath');
sw.defDim(swathID,'GeoTrack',2000);
sw.defDim(swathID,'GeoXtrack',1000);
sw.defDim(swathID,'DataTrack',4000);
sw.defDim(swathID,'DataXtrack',2000);
sw.defDimMap(swathID,'GeoTrack','DataTrack',0,2);
sw.defDimMap(swathID,'GeoXtrack','DataXtrack',1,2);
sw.detach(swathID);
sw.close(swfid);
swfid = sw.open('myfile.hdf','read');
swathID = sw.attach(swfid,'MySwath');
[offset,increment] = sw.mapInfo(swathID,'GeoTrack','DataTrack');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defDimMap`

matlab.io.hdfeos.sw.nEntries

Package: matlab.io.hdfeos.sw

Number of entries for specific type

Syntax

```
nEnts = nEntries(swathID,type)
```

Description

`nEnts = nEntries(swathID,type)` returns the number of entries in a swath. Valid inputs for `type` include:

`'dims'`	or `'HDFE_NENTDIM'`
`'maps'`	or `'HDFE_NENTMAP'`
`'imaps'`	or `'HDFE_NENTIMAP'`
`'geofields'`	or `'HDFE_NENTGFLD'`
`'datafields'`	or `'HDFE_NENTFLD'`

This function corresponds to the `SWnentries` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
swathID = sw.create(swfid,'MySwath');
sw.defDim(swathID,'GeoTrack',2000);
sw.defDim(swathID,'GeoXtrack',1000);
sw.defDim(swathID,'DataTrack',4000);
sw.defDim(swathID,'DataXtrack',2000);
ndims = sw.nEntries(swathID,'dims');
sw.detach(swathID);
sw.close(swfid);
```

matlab.io.hdfeos.sw.open

Package: matlab.io.hdfeos.sw

Open swath file

Syntax

```
swfID = open(filename)
swfID = open(filename,access)
```

Description

`swfID = open(filename)` opens an HDF-EOS swath file for read-only access.

`swfID = open(filename,access)` opens or creates an HDF-EOS swath file identified by `filename` and returns a file ID. `access` can be one of the following values.

`'read'` (default)	Read-only
`'rdwr'`	Read-write
`'create'`	Creates a file, deleting it if it already exists

This routine corresponds to the `SWopen` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
sw.close(swfid);
```

See Also

See Also

`sw.close`

matlab.io.hdfeos.sw.periodInfo

Package: matlab.io.hdfeos.sw

Information about subsetted period

Syntax

```
[datatype,dims] = periodInfo(swathID,periodID,fieldname)
```

Description

`[datatype,dims] = periodInfo(swathID,periodID,fieldname)` retrieves information about the period defined for the given field. `datatype` is the data type of the field. `dims` is the dimensions of the subsetted region.

This function corresponds to the `SWperiodinfo` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `dims` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
starttime =  25;
stoptime = 425;
periodID = sw.defTimePeriod(swathID,starttime,stoptime,'MIDPOINT');
[ntype,dims] = sw.periodInfo(swathID,periodID,'Temperature');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defTimePeriod` | `sw.extractPeriod`

matlab.io.hdfeos.sw.readAttr

Package: matlab.io.hdfeos.sw

Read swath attribute

Syntax

```
data = readAttr(swathID,attrname)
```

Description

`data = readAttr(swathID,attrname)` reads a swath attribute.

This function corresponds to the `SWreadAttr` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
value = sw.readAttr(swathID,'creation_date');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.writeAttr`

matlab.io.hdfeos.sw.readField

Package: matlab.io.hdfeos.sw

Read data from swath field

Syntax

```
data = readField(swathID,fieldname)
data = readField(swathID,fieldname,start,count)
data = readField(swathID,fieldname,start,count,stride)
```

Description

`data = readField(swathID,fieldname)` reads an entire swath field.

`data = readField(swathID,fieldname,start,count)` reads a contiguous hyperslab of data from the swath field `fieldname`. The `start` input specifies the zero-based index of the first element to be read. `count` specifies the number of elements along each dimension to read.

`data = readField(swathID,fieldname,start,count,stride)` reads a strided hyperslab of data from the swath field `fieldname`. The `stride` input specifies the inter-element spacing along each dimension.

This function corresponds to the `SWreadfield` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `start`, `count`, and `stride` parameters are reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
data = sw.readField(swathID,'Longitude');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.writeField`

matlab.io.hdfeos.sw.regionInfo

Package: matlab.io.hdfeos.sw

Information about subsetted region

Syntax

```
[datatype,extent] = regionInfo(swathID,regionID,fieldname)
```

Description

`[datatype,extent] = regionInfo(swathID,regionID,fieldname)` returns the data type and extent of a subsetted region of a field. `regionID` is the identifier for the subsetted region.

This function corresponds to the `SWregioninfo` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `extent` parameter is reversed with respect to the C library API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('swath.hdf');
swathID = sw.attach(swfid,'Example Swath');
lat = [34 44];
lon = [16 24];
regionID = sw.defBoxRegion(swathID,lat,lon,'MIDPOINT');
[ntype,dims] = sw.regionInfo(swathID,regionID,'Temperature');
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.defBoxRegion` | `sw.defVrtRegion`

matlab.io.hdfeos.sw.setFillValue

Package: matlab.io.hdfeos.sw

Set fill value for the specified field

Syntax

```
setFillValue(swathID,fieldname,fillvalue)
```

Description

`setFillValue(swathID,fieldname,fillvalue)` sets the fill value for the specified field. The field must have more than two dimensions.

This function corresponds to the `SWsetfillvalue` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
swathID = sw.create(swfid,'MySwath');
sw.defDim(swathID,'Track',400);
sw.defDim(swathID,'Xtrack',200);
dims = {'Track','Xtrack'};
sw.defDataField(swathID,'Temperature',dims,'float');
sw.setFillValue(swathID,'Temperature',single(-999));
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.getFillValue`

matlab.io.hdfeos.sw.writeAttr

Package: matlab.io.hdfeos.sw

Write swath attribute

Syntax

```
writeAttr(swathID,attrname,data)
```

Description

`writeAttr(swathID,attrname,data)` writes an attribute to a swath. If the attribute does not exist, it is created. If the attribute exists, it can be modified in place, but it cannot be recreated with a different data type or length.

This function corresponds to the `SWwriteattr` function in the HDF-EOS library C API.

Examples

```
import matlab.io.hdfeos.*
swfid = sw.open('myfile.hdf','create');
swathID = sw.create(swfid,'MySwath');
sw.writeAttr(swathID,'creation_date', datestr(now));
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

`sw.readAttr`

matlab.io.hdfeos.sw.writeField

Package: matlab.io.hdfeos.sw

Write data to swath field

Syntax

```
writeField(swathID,fieldname,data)
writeField(swathID,fieldname,start,data)
writeField(swathID,fieldname,start,stride,data)
```

Description

`writeField(swathID,fieldname,data)` writes an entire swath data field.

`writeField(swathID,fieldname,start,data)` writes a contiguous hyperslab to a swath field. `start` specifies the index of the first element to write. The number of elements along each dimension is inferred from either the size of `data` or from the swath field itself.

`writeField(swathID,fieldname,start,stride,data)` writes a strided hyperslab to a swath field. `stride` specifies the inter-element spacing along each dimension.

This function corresponds to the `SWwritefield` function in the HDF-EOS library C API, but because MATLAB uses FORTRAN-style ordering, the `start` and `stride` parameters are reversed with respect to the C library API.

Examples

Write data to a geolocation field `'Longitude'`.

```
lon = [-50:49];
data = repmat(lon(:),1,100);
data = single(data);
import matlab.io.hdfeos.*
srcFile = fullfile(matlabroot,'toolbox','matlab','imagesci','swath.hdf');
```

```
copyfile(srcFile,'myfile.hdf');
fileattrib('myfile.hdf','+w');
swfid = sw.open('myfile.hdf','rdwr');
swathID = sw.attach(swfid,'Example Swath');
sw.writeField(swathID,'Longitude',data);
sw.detach(swathID);
sw.close(swfid);
```

See Also

See Also

sw.readField

matlab.io.saveVariablesToScript

Save workspace variables to MATLAB script

Syntax

```
matlab.io.saveVariablesToScript(filename)
matlab.io.saveVariablesToScript(filename,varnames)
matlab.io.saveVariablesToScript(filename,Name,Value)
[r1,r2] = matlab.io.saveVariablesToScript(filename)
```

Description

`matlab.io.saveVariablesToScript(filename)` saves variables in the current workspace to a MATLAB script named `filename.m`. The filename can include the `.m` suffix. If you do not include it, the function adds it when it creates the file.

Variables that MATLAB cannot generate code for are saved to a MAT-file named `filename.mat`.

If a file with the same name already exists, it is overwritten.

`matlab.io.saveVariablesToScript(filename,varnames)` saves only workspace variables specified by `varnames` to the MATLAB script.

`matlab.io.saveVariablesToScript(filename,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments.

`[r1,r2] = matlab.io.saveVariablesToScript(filename)` additionally returns two cell arrays:

- `r1` for variables that were saved to the MATLAB script
- `r2` for variables that were saved to a MAT-file

Examples

Save Workspace Variables to MATLAB Script

Save variables from a workspace to a MATLAB script, `test.m`.

```
matlab.io.saveVariablesToScript('test.m')
```

Save Specific Workspace Variables to MATLAB Script

Create and save variable `myVar` from a workspace to a MATLAB script, `test.m`.

```
myVar = 55.3;
matlab.io.saveVariablesToScript('test.m','myVar')
```

Append Specific Variables to Existing MATLAB Script

Create two variables, `a` and `b`, and save them to an existing MATLAB script `abfile.m`.

```
a = 72.3;
b = pi;
matlab.io.saveVariablesToScript('abfile.m',{'a','b'},...
'SaveMode','append')
```

Update Specific Variables in Existing MATLAB Script

Update and save two variables, `y` and `z`, to an existing MATLAB script `yzfile.m`.

```
y = 15.7;
z = 3 * pi;
matlab.io.saveVariablesToScript('yzfile.m',{'y','z'},...
'SaveMode','update')
```

Specify MATLAB Script Configuration for Saving Variable

Update and save variable `resistance` to an existing MATLAB script `designData.m` while specifying the configuration of the script file.

```
resistance = [10 20.5 11 13.7 15.1 7.7];
matlab.io.saveVariablesToScript('designData.m','resistance',...
'SaveMode','Update','MaximumArraySize',5,...
'MaximumNestingLevel',5,'MaximumTextWidth',30)
```

Specify 2-D Slice for Saving 3-D Array in MATLAB Script

Specify a 2-D slice for the output of the 3-D array `my3Dtable`, such that the 2-D slice expands along the first and third dimensions. Save the 2-D slice in the MATLAB script `sliceData.m`.

```
level1 = [1 2; 3 4];
```

```
level2 = [5 6; 7 8];
my3Dtable( :, :, 1) = level1;
my3Dtable( :, :, 2) = level2;
matlab.io.saveVariablesToScript('sliceData.m','MultidimensionalFormat',[1,3])
```

The resulting MATLAB code is similar to the following:

```
level1 = ...
 [1 2;
 3 4];

level2 = ...
 [5 6;
 7 8];
my3Dtable = zeros(2, 2, 2);
my3Dtable(:,1,:) = ...
 [1 5;
 3 7];

my3Dtable(:,2,:) = ...
 [2 6;
 4 8];
```

Save Variables Matching a Regular Expression

Save variables that match the expression `autoL*` to a MATLAB script `autoVariables.m`.

```
matlab.io.saveVariablesToScript('autoVariables.m','RegExp','autoL*')
```

Save Variables to Version 7.3 MATLAB Script

Create two variables, `p` and `q`, and save them to a version 7.3 MATLAB script `version73.m`.

```
p = 49;
q = 35.5;
matlab.io.saveVariablesToScript('version73.m','p','q',...
'MATFileVersion','v7.3')
```

Return Variables Saved to MATLAB Script

Save variables that were saved to a MATLAB script to the variable `r1`, and those that were saved to a MAT-file to the variable `r2`.

```
[r1,r2] = matlab.io.saveVariablesToScript('mydata.m')
```

```
r1 =

    'level1'
    'level2'
    'level3'
    'my3Dtable'


r2 =

   Empty cell array: 0-by-1
```

Input Arguments

`filename` — Name of MATLAB script for saving variables

filename | variable

Name of MATLAB script for saving variables, specified as a string giving a file name or a variable containing the file name.

Example: `matlab.io.saveVariablesToScript('myVariables.m')`

`varnames` — Name of variables to save

string | cell array

Name of variables to save, specified as a string or a cell array.

Example: `{'X','Y','Z'}`

Data Types: `char` | `cell`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'MaximumArraySize',500,'MATFileVersion','v4'` specifies that the maximum number of array elements to save is `500` using MATLAB version 4 syntax.

`'MATFileVersion'` — MATLAB version whose syntax to use
`'v7.3'` (default) | `'v4'` | `'v6'` | `'v7'`

MATLAB version whose syntax to use for saving MAT-files, specified as the comma-separated pair consisting of `'MATFileVersion'` and one of the following version numbers:

- `'v4'`
- `'v6'`
- `'v7'`
- `'v7.3'`

Example: `'MATFileVersion','v6'`

Data Types: `char`

`'MaximumArraySize'` — Maximum array elements to save
`1000` (default) | integer

Maximum array elements to save, specified as the comma-separated pair consisting of `'MaximumArraySize'` and an integer in the range of 1 to 10,000.

Example: `'MaximumArraySize',1050`

`'MaximumNestingLevel'` — Maximum number of object levels or array hierarchies to save
`20` (default) | integer

Maximum number of object levels or array hierarchies to save, specified as the comma-separated pair consisting of `'MaximumNestingLevel'` and an integer in the range of 1 to 200.

Example: `'MaximumNestingLevel',67`

`'MaximumTextWidth'` — Text wrap width during save
`76` (default) | integer

Text wrap width during save, specified as the comma-separated pair consisting of `'MaximumTextWidth'` and an integer in the range of 32 to 256.

Example: `'MaximumTextWidth',82`

`'MultidimensionalFormat'` — Dimensions of 2-D slices that represent n-D arrays of char, logic, or numeric data
`'rowvector'` (default) | integer cell array

Dimensions of 2-D slices that represent n-D arrays of char, logic, or numeric data, specified as the comma-separated pair consisting of `'MultidimensionalFormat'` and one of these values:

- `'rowvector'` — Save multidimensional variables as a single row vector.
- `integer cell array` — Save a 2-D slice of multidimensional variables, where the dimensions satisfy all the following criteria:
  - Two positive integers represent dimensions.
  - The two integers are less than or equal to the dimensions of the n-D array.
  - The second integer is greater than the first.

Example: `'MultidimensionalFormat',[1,3]`

`'RegExp'` — Regular expression for matching
string

Regular expression for matching, specified as the comma-separated pair consisting of `'RegExp'` and one or more expressions given as a string.

Example: `'RegExp','level*'`

Data Types: `char`

`'SaveMode'` — Mode to save MATLAB script
`'create'` (default) | `'update'` | `'append'`

Mode to save MATLAB script, specified as the comma-separated pair consisting of `SaveMode` and one of these values:

- `'create'` — Save variables to a new MATLAB script.
- `'update'` — Only update variables that are already present in a MATLAB script.
- `'append'` — Update variables that are already present in a MATLAB script and append new variables to the end of the script.

Example: `'SaveMode','Update'`

Output Arguments

`r1` — Variables that were saved to a MATLAB script
cell array

Variables that were saved to a MATLAB script, returned as a cell array of variable names.

r2 — Variables that were saved to a MAT-file
cell array

Variables that were saved to a MAT-file, returned as a cell array of variable names.

Limitations

- `matlab.io.saveVariablesToScript` does not save the following variables to a MATLAB script or a MAT-file.
  - Java objects
  - .NET objects
  - Python objects
- `matlab.io.saveVariablesToScript` saves the following variables only to a MAT-file.
  - MATLAB objects
  - Function handles
  - Anonymous functions

If you have Simulink, you can use `matlab.io.saveVariablesToScript` to save the variables that your models use. However, if you save many variables, the generated MATLAB file can contain many lines of code and take a long time to execute. To avoid the long execution time, consider these alternatives:

- Permanently store variables in a data dictionary instead of using `Simulink.saveVars`. A data dictionary also provides more tools for managing variables. See "Determine Where to Store Variables and Objects for Simulink Models" (Simulink).
- Save variables in a MAT-file by using the `save` function.

See Also

matlab.lang.makeUniqueStrings

Construct unique strings from input strings

Syntax

```
U = matlab.lang.makeUniqueStrings(S)
```

```
U = matlab.lang.makeUniqueStrings(S,excludedStrings)
U = matlab.lang.makeUniqueStrings(S,whichStringsIdx)
U = matlab.lang.makeUniqueStrings(S, ___ , maxStringLength)
```

```
[U, modified] = matlab.lang.makeUniqueStrings( ___ )
```

Description

`U = matlab.lang.makeUniqueStrings(S)` constructs unique strings or character vectors, `U`, from input strings or character vectors, `S`, by appending an underscore and a number to duplicates.

`U = matlab.lang.makeUniqueStrings(S,excludedStrings)` constructs strings or character vectors that are unique within `U` and with respect to `excludedStrings`. The `makeUniqueStrings` function does not check `excludedStrings` for uniqueness.

`U = matlab.lang.makeUniqueStrings(S,whichStringsIdx)` specifies the subset of `S` to make unique within the entire set. `makeUniqueStrings` makes the elements in `S(whichStringsIdx)` unique among themselves and with respect to the remaining elements. `makeUniqueStrings` returns the remaining elements unmodified in `U`. Use this syntax when you have an string array or an array of character vectors, and need to check that only some elements are unique.

`U = matlab.lang.makeUniqueStrings(S, ___ , maxStringLength)` specifies the maximum length, `maxStringLength`, of elements in `U`. If `makeUniqueStrings` cannot make elements in `S` unique without exceeding `maxStringLength`, it returns an error. You can use this syntax with any of the input arguments of the previous syntaxes.

`[U, modified] = matlab.lang.makeUniqueStrings( ___ )` returns a logical array, `modified`, indicating the modified elements.

Examples

Construct Unique Character Vectors

Create a cell array of names and make each element unique.

```
S = {'John' 'Sue' 'Nick' 'John' 'Campion' 'John' 'Jason'};
U = matlab.lang.makeUniqueStrings(S)
```

```
U = 1×7 cell array
    'John'    'Sue'    'Nick'    'John_1'    'Campion'    'John_2'    'Jason'
```

The `makeUniqueStrings` function appends the duplicate names in elements 3 and 5 with underscores and incrementing numbers.

Construct Unique Character Vectors and Specify Exclusions

Without specifying excluded values, make the character vectors in `U` unique.

```
S = {'John' 'Sue' 'Nick' 'John' 'Campion' 'John' 'Jason'};
U = matlab.lang.makeUniqueStrings(S)
```

```
U = 1×7 cell array
    'John'    'Sue'    'Nick'    'John_1'    'Campion'    'John_2'    'Jason'
```

Specify that the character vector, `'Nick'`, should be excluded from the output.

```
U = matlab.lang.makeUniqueStrings(S, 'Nick')
```

```
U = 1×7 cell array
    'John'    'Sue'    'Nick_1'    'John_1'    'Campion'    'John_2'    'Jason'
```

`makeUniqueStrings` excludes `'Nick'` from `U` and instead modifies the first duplicate, found in element 3, to be `'Nick_1'`.

Exclude workspace variables from the unique cell array.

```
Sue = 42;
U = matlab.lang.makeUniqueStrings(S, who)
```

```
U = 1×7 cell array
    'John'    'Sue_1'    'Nick'    'John_1'    'Campion'    'John_2'    'Jason'
```

Since `'Sue'` exists in the workspace, `makeUniqueStrings` makes this character vector unique by appending an underscore and number.

Construct Unique Elements for Specified Array Indices

Create an array of character vectors and make only the first four elements unique.

```
S = {'quiz' 'quiz' 'quiz' 'exam' 'quiz' 'exam'};
U = matlab.lang.makeUniqueStrings(S, 1:4)
```

```
U = 1×6 cell array
    'quiz_1'    'quiz_2'    'quiz_3'    'exam_1'    'quiz'    'exam'
```

The first four elements in `U` are unique among themselves, and among the remaining character vectors in elements 5 and 6 (`'quiz'` and `'exam'`). Alternatively, you can use a logical array instead of a range of linear indices to achieve the same results: `U = matlab.lang.makeUniqueStrings(S, [true true true true false false])` or `U = matlab.lang.makeUniqueStrings(S, logical([1 1 1 1 0 0]))`.

Append a duplicate `'quiz'` onto the end of `S` and make the first four elements unique.

```
S{end+1} = 'quiz'
```

```
S = 1×7 cell array
    'quiz'    'quiz'    'quiz'    'exam'    'quiz'    'exam'    'quiz'
```

```
U = matlab.lang.makeUniqueStrings(S, 1:4)
```

```
U = 1×7 cell array
    'quiz_1'    'quiz_2'    'quiz_3'    'exam_1'    'quiz'    'exam'    'quiz'
```

The character vectors that `makeUniqueStrings` checks are still unique among themselves and among the remaining elements. Since `makeUniqueStrings` does not check any elements after element 4, duplicate character vectors remain.

Construct Unique Character Vectors with Maximum Length

Create an array from `S` where the first three elements are unique and the maximum length of each string is 5.

```
S = {'sampleData' 'sampleData' 'sampleData' 'sampleData'};
U = matlab.lang.makeUniqueStrings(S, 1:3, 5)
```

```
U = 1×4 cell array
    'sampl'    'sam_1'    'sam_2'    'sampleData'
```

The first element is truncated to 5 characters. The second and third elements are truncated to 3 characters to allow `makeUniqueStrings` to append an underscore and number, and still not exceed 5 characters.

Determine Modified Character Vectors

```
S = {'a%name', 'name_1', '2_name'};
[N, modified] = matlab.lang.makeValidName(S)
```

```
N = 1×3 cell array
    'a_name'    'name_1'    'x2_name'


modified = 1×3 logical array
   1   0   1
```

`makeValidName` did not modify the second element.

Input Arguments

S — Input values

character vector | cell array of character vectors | string array

Input strings, specified as a character vector, cell array of character vectors, or string array.

`excludedStrings` — Strings to exclude

character vector | cell array of character vectors | string array

Character vectors to exclude from `U`, specified as a character vector, cell array of character vectors, or string array.

Example: `'dontDuplicateThis'`

Example: `{'excludeS1' 'excludeS2'}`

Example: `["excludeThis" "andThis"]`

Example: `who`

`whichStringsIdx` — Subset of strings to make unique

range of linear indices or logical array

Subset of `S`to make unique within the entire set, specified as a range of linear indices or as a logical array with the same size and shape as `S`. If there are duplicates in `S`, the `makeUniqueStrings` function only modifies those specified by `whichStringsIdx`.

If `whichStringsIdx` is a logical array, elements are checked for uniqueness when the array element in the same position has a value of `true`.

Example: `1:5`, `logical([1 0 1])`, `[true false true]`

`maxStringLength` — Maximum length of strings

integer

Maximum length of strings in `U`, specified as an integer. If `makeUniqueStrings` cannot make elements in `S` unique without exceeding `maxStringLength`, it returns an error.

Output Arguments

`U` — Unique strings

character vector | cell array of character vectors | string array

Unique strings, returned as a character vector, cell array of character vectors, or string array. The output has the same dimension as the input, `S`.

`modified` — Indicator of modified elements

logical scalar | logical array

Indicator of modified elements, returned as a logical scalar or array and having the same dimension as the input, `S`. A value of `1` (`true`) indicates that `makeUniqueStrings` modified the element in the corresponding location. A value of `0` (`false`) indicates that `makeUniqueStrings` did not need to modify the element in the corresponding location.

Tips

- To ensure that input values are valid and unique, use `matlab.lang.makeValidName` before `matlab.lang.makeUniqueStrings`.

```
S = {'my.Name','my_Name','my_Name'};
validValues = matlab.lang.makeValidName(S)
validUniqueValues = matlab.lang.makeUniqueStrings(validValues,...
    {},namelengthmax)
```

```
validValues =

    'my_Name'    'my_Name'    'my_Name'


validUniqueValues =

    'my_Name'    'my_Name_1'    'my_Name_2'
```

See Also

See Also

`matlab.lang.makeValidName` | `namelengthmax` | `who`

Introduced in R2014a

matlab.lang.makeValidName

Construct valid MATLAB identifiers from input strings

Syntax

```
N = matlab.lang.makeValidName(S)
N = matlab.lang.makeValidName(S,Name,Value)
[N, modified] = matlab.lang.makeValidName( ___ )
```

Description

`N = matlab.lang.makeValidName(S)` constructs valid MATLAB identifiers, `N`, from input strings, `S`. The `makeValidName` function does not guarantee the strings in `N` are unique.

A valid MATLAB identifier is a character vector of alphanumerics (A–Z, a–z, 0–9) and underscores, such that the first character is a letter and the length of the character vector is less than or equal to `namelengthmax`.

`makeValidName` deletes any whitespace characters before replacing any characters that are not alphanumerics or underscores. If a whitespace character is followed by a lowercase letter, `makeValidName` converts the letter to the corresponding uppercase character.

`N = matlab.lang.makeValidName(S,Name,Value)` includes additional options specified by one or more `Name,Value` pair arguments.

`[N, modified] = matlab.lang.makeValidName( ___ )` returns a logical array, `modified`, indicating modified characters. You can use this syntax with any of the input arguments of the previous syntaxes.

Examples

Construct Valid MATLAB Identifiers

```
S = {'Item_#','Price/Unit','1st order','Contact'};
```

```
N = matlab.lang.makeValidName(S)
```

```
N = 1×4 cell array
    'Item__'    'Price_Unit'    'x1stOrder'    'Contact'
```

In the first and second elements, `makeValidName` replaced the invalid characters (# and /), with underscores. In the third element, `makeValidName` appended a prefix because the character vector does not begin with a letter, deleted the empty space, and capitalized the character following the deleted space.

Construct Valid MATLAB Identifiers Using Specified Replacement Style

Replace invalid characters with the corresponding hexadecimal representation.

```
S = {'Item_#','Price/Unit','1st order','Contact'};
N = matlab.lang.makeValidName(S,'ReplacementStyle','hex')
```

```
N = 1×4 cell array
    'Item_0x23'    'Price0x2FUnit'    'x1stOrder'    'Contact'
```

In the first and second elements, `makeValidName` replaced the invalid characters (# and /), with their hexadecimal representation. In the third element, `makeValidName` appended a prefix because the character vector does not begin with a letter, deleted the empty space, and capitalized the character following the deleted space.

Delete invalid characters.

```
N = matlab.lang.makeValidName(S,'ReplacementStyle','delete')
```

```
N = 1×4 cell array
    'Item_'    'PriceUnit'    'x1stOrder'    'Contact'
```

`makeValidName` deleted the invalid characters (# and /). In the third element, `makeValidName` appended a prefix because the character vector does not begin with a letter, deleted the empty space, and capitalized the character following the deleted space.

Construct Valid MATLAB Identifiers Using Specified Prefix

```
S = {'1stMeasurement','2ndMeasurement','Control'};
N = matlab.lang.makeValidName(S,'Prefix','m_')
```

```
N = 1×3 cell array
    'm_1stMeasurement'    'm_2ndMeasurement'    'Control'
```

Only the elements that do not start with a letter are prepended with a prefix.

Determine Modified Character Vectors

```
S = {'a%name', 'name_1', '2_name'};
[N, modified] = matlab.lang.makeValidName(S)
```

```
N = 1×3 cell array
    'a_name'    'name_1'    'x2_name'


modified = 1×3 logical array
   1   0   1
```

`makeValidName` did not modify the second element.

Input Arguments

S — Input strings

character vector | cell array of character vectors | string array

Input strings, specified as a character vector, cell array of character vectors, or string array. If `S` is a string array or cell array of character vectors, it must be a 1xN or Nx1 array.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'ReplacementStyle','delete'` deletes invalid characters.

`'ReplacementStyle'` — Replacement style

`'underscore'` (default) | `'delete'` | `'hex'`

Replacement style, specified as `'underscore'`, `'delete'`, or `'hex'`. The value controls how MATLAB replaces nonalphanumeric characters.

`ReplacementStyle` Value	Description
`'underscore'` (default)	Replaces all characters that are not alphanumerics or underscores with underscores. `'underscore'` deletes whitespace characters and changes a lowercase letter following a whitespace to uppercase.
`'hex'`	Replaces each character that is not an alphanumeric or underscore with its corresponding hexadecimal representation. `'hex'` deletes whitespace characters and changes a lowercase letter following a whitespace to uppercase.
`'delete'`	Deletes all characters that are not alphanumerics or underscores. `'delete'` deletes whitespace characters and changes any lowercase letter following a whitespace to uppercase.

`'Prefix'` — Characters to prefix

`'x'` (default) | character vector | string

Characters to prefix to inputs that do not begin with a letter after `makeValidName` replaces nonalphanumeric characters, specified as a character vector or string. A valid prefix must start with a letter, contain only alphanumeric characters and underscores, and not be longer than the value of `namelengthmax`.

Output Arguments

`N` — Valid MATLAB identifiers

character vector | cell array of character vectors | string array

Valid MATLAB identifiers, returned as a character vector, cell array of character vectors, or string array. The output has the same number of dimensions as the input, `S`.

`modified` — Indicator of modified elements

logical scalar | logical array

Indicator of modified elements, returned as a logical scalar or array and having the same number of dimensions as the input, `S`. A value of `1` (`true`) indicates that `makeValidName` modified the input in the corresponding location. A value of `0` (`false`) indicates that `makeValidName` did not need to modify the input in the corresponding location.

Tips

- To ensure that input values are valid and unique, use `matlab.lang.makeUniqueStrings` after `matlab.lang.makeValidName`.

```
S = {'my.Name','my_Name','my_Name'};
validValues = matlab.lang.makeValidName(S)
validUniqueValues = matlab.lang.makeUniqueStrings(validValues,{},...
    namelengthmax)
```

```
validValues =

    'my_Name'    'my_Name'    'my_Name'


validUniqueValues =

    'my_Name'    'my_Name_1'    'my_Name_2'
```

- To customize an invalid character replacement, first use functions such as `strrep` or `regexprep` to convert to valid characters. For example, convert `'@'` characters in `S` to `'At'` using `strrep(S,'@','At')`. Then, use `matlab.lang.makeValidName` to ensure that all characters in `S` are valid.

See Also

See Also

`iskeyword` | `isletter` | `isvarname` | `matlab.lang.makeUniqueStrings` | `namelengthmax` | `regexp` | `regexprep` | `strrep` | `who`

Introduced in R2014a

matlab.mock.actions.AssignOutputs class

Package: matlab.mock.actions

Define return values for method called or property accessed

Description

To specify the values that the framework returns when a mock object method is invoked or a mock object property is accessed, use the `AssignOutputs` class.

If you call a mocked method with fewer outputs than specified by `AssignOutputs`, the remaining outputs are discarded. If you call a mocked method with more outputs than specified by `AssignOutputs`, MATLAB throws an error.

Construction

`action = AssignOutputs(A1,...,An)` defines the values for the mock object to return for a method call or property access. The `AssignOutputs` constructor accepts one or more values, `A1,...,An`, that correspond to the values for the output arguments of the mock object method or the value of the mock object property.

Input Arguments

`A1,...,An` — Return values
scalar | vector | matrix | multidimensional array

Return values, specified as scalars, vectors, matrices, or multidimensional arrays. Return values can be any data type.

Example: `"mySpecifiedValue"`

Example: `7,13,42`

Example: `[1 2 3;4 5 6]`

Properties

`Outputs` — Predefined return values

cell array

Predefined return values, returned as a cell array of arguments. Return values are specified during class construction, and can be any data type.

Data Types: `cell`

Methods

repeat	Repeat same action multiple times
then	Specify action

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Assign Outputs to Mock

Create a mock for a quadrilateral class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"sideLengths");
```

Set up behavior.

```
import matlab.mock.actions.AssignOutputs;
when(withAnyInputs(behavior.sideLengths),AssignOutputs(2,2,4,4));
```

Use the mock.

```
[a,b,c,d] = mock.sideLengths
```

Alternatives

For simple definition of outputs, you can use the assignOutputsWhen method of the `matlab.mock.TestCase` class. However, there is more functionality when you use the `AssignOutputs` action.

See Also

See Also

matlab.mock.TestCase | matlab.mock.actions.ThrowException | matlab.mock.MethodCallBehavior.when | matlab.mock.PropertyGetBehavior.when

Introduced in R2017a

repeat

Class: matlab.mock.actions.AssignOutputs
Package: matlab.mock.actions

Repeat same action multiple times

Syntax

```
repeat(n,action)
```

Description

`repeat(n,action)` repeats the same action multiple times.

Input Arguments

n — Number of times to repeat action

integer

Number of times to repeat action, specified as an integer.

Example: 5

action — Defined action

instance of `matlab.mock.actions.AssignOutputs`

Defined action, specified as an instance of `matlab.mock.actions.AssignOutputs`.

Example: `AssignOutputs(true)`

Example: `AssignOutputs(7,13,42)`

Examples

Assign Repeating Outputs to Mock

Create a mock for a bank account class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"isOpen");
```

Specify behavior.

```
import matlab.mock.actions.AssignOutputs
when(withExactInputs(behavior.isOpen),then(repeat(2,AssignOutputs(true)), ...
    then(AssignOutputs(false))));
```

Use the mock.

```
for i = 1:3
    isAccountOpen = mock.isOpen
end
```

```
isAccountOpen = logical
   1


isAccountOpen = logical
   1


isAccountOpen = logical
   0
```

Tips

- If you repeat an action, and do not follow it with a call to the `then` method, the mock continues to return the repeated value. For example, consider the following mock of a bank account class.

  ```
  import matlab.mock.actions.AssignOutputs
  testCase = matlab.mock.TestCase.forInteractiveUse;
  [mock,behavior] = testCase.createMock('AddedProperties',"IsJointAccount");
  ```

  If you repeat an action to return a property value of `true` twice, the following code, which goes on to get the property value a third and fourth time, returns `true` all four times.

  ```
  when(get(behavior.IsJointAccount),then(repeat(2,AssignOutputs(true))));
  for i = 1:4
  ```

```
    tf = mock.IsJointAccount
end
```

But the following code returns `true` twice and `false` twice.

```
when(get(behavior.IsJointAccount),then(repeat(2,AssignOutputs(true)), ...
    then(AssignOutputs(false))));
for i = 1:4
    tf = mock.IsJointAccount
end
```

See Also

Introduced in R2017a

then

Class: matlab.mock.actions.AssignOutputs
Package: matlab.mock.actions

Specify action

Syntax

```
then(action1)
then(action1,action2)
```

Description

`then(action1)` specifies an action for mock object interactions.

`then(action1,action2)` specifies an action and a subsequent action for mock object interactions.

Input Arguments

`action1` — Defined action
instance of `matlab.mock.actions.AssignOutputs`

Defined action, specified as an instance of `matlab.mock.actions.AssignOutputs`.

Example: `AssignOutputs(true)`

Example: `AssignOutputs(7,13,42)`

`action2` — Second defined action
instance of `matlab.mock.actions.AssignOutputs` | instance of `matlab.mock.actions.ThrowException`

Second defined action, specified as an instance of `matlab.mock.actions.AssignOutputs` or `matlab.mock.actions.ThrowException`.

Example: `AssignOutputs(7,13,42)`

Example: `ThrowException`

Examples

Assign Series of Outputs to Mock

Create a mock for a bank account class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"isOpen");
```

Set up behavior to return `true`, `true`, and then `false`.

```
import matlab.mock.actions.AssignOutputs;
when(withExactInputs(behavior.isOpen),then(AssignOutputs(true), ...
    then(AssignOutputs(true),then(AssignOutputs(false)))));
```

Use the mock.

```
isAccountOpen = mock.isOpen
```

```
isAccountOpen = logical
   1
```

```
isAccountOpen = mock.isOpen
```

```
isAccountOpen = logical
   1
```

```
isAccountOpen = mock.isOpen
```

```
isAccountOpen = logical
   0
```

Tips

- Each call to `then` accepts up to two actions. To specify more subsequent actions, use multiple calls to `then`. For example, to specify three actions use `then(action1,then(action2,action3))`.

See Also

Introduced in R2017a

matlab.mock.actions.ReturnStoredValue class

Package: matlab.mock.actions

Return stored property value

Description

The `ReturnStoredValue` action specifies that the stored value is returned when accessing a property.

By default, when you access property values in strict mocks, MATLAB throws an exception. To specify that the framework returns the stored value of a mock object property, use the `ReturnStoredValue` class.

Construction

`action = ReturnStoredValue` returns the stored property value.

Methods

repeat	Repeat same action multiple times
then	Specify action

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Return Mock Property Value

Create a strict mock. By default, property interactions throw exceptions.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
properties = ["PropA" "PropB" "PropC"];
[mock,behavior] = testCase.createMock('AddedProperties',properties,"Strict",true);
```

Enable access to `PropA`.

```
import matlab.mock.actions.ReturnStoredValue;
when(get(behavior.PropA),ReturnStoredValue);
```

Use the mock.

```
val1 = mock.PropA
```

```
val1 =

     []
```

```
val2 = mock.PropB
```

```
Interactive assertion failed.

----------------
Test Diagnostic:
----------------
Unexpected access of strict mock property 'PropB'.
Assertion failed.
```

Alternatives

For a simple directive to return property values, you can use the returnStoredValueWhen method of the `matlab.mock.TestCase` class. However, there is more functionality when you use the `ReturnStoredValue` action.

See Also

See Also

matlab.mock.TestCase | matlab.mock.actions.AssignOutputs | matlab.mock.actions.StoreValue | matlab.mock.actions.ThrowException | matlab.mock.PropertyGetBehavior.when

Introduced in R2017a

repeat

Class: matlab.mock.actions.ReturnStoredValue
Package: matlab.mock.actions

Repeat same action multiple times

Syntax

```
repeat(n,action)
```

Description

`repeat(n,action)` repeats the same action multiple times.

Input Arguments

n — Number of times to repeat action

integer

Number of times to repeat action, specified as an integer.

Example: 5

action — Defined action

instance of `matlab.mock.actions.ReturnStoredValue`

Defined action, specified as an instance of `matlab.mock.actions.ReturnStoredValue`.

Examples

Repeat Return of Stored Property Value

Create a strict mock for a bank account class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"isOpen",'Strict',true);
```

Specify behavior. Return the stored property value, which is empty by default, twice and then assign an output of `false`.

```
import matlab.mock.actions.ReturnStoredValue
import matlab.mock.actions.AssignOutputs
when(get(behavior.isOpen),then(repeat(2,ReturnStoredValue), ...
    then(AssignOutputs(false))));
```

Use the mock.

```
for i = 1:3
    isOpen = mock.isOpen
end
```

```
isOpen =

     []

isOpen =

     []

isOpen = logical
   0
```

See Also

Introduced in R2017a

then

Class: matlab.mock.actions.ReturnStoredValue
Package: matlab.mock.actions

Specify action

Syntax

```
then(action1)
then(action1,action2)
```

Description

`then(action1)` specifies an action for mock object interactions.

`then(action1,action2)` specifies an action and a subsequent action for mock object interactions.

Input Arguments

`action1` — Defined action
instance of `matlab.mock.actions.ReturnStoredValue`

Defined action, specified as an instance of `matlab.mock.actions.ReturnStoredValue`.

`action2` — Second defined action
instance of `matlab.mock.actions.AssignOutputs` | instance of `matlab.mock.actions.ThrowException`

Second defined action, specified as an instance of `matlab.mock.actions.AssignOutputs`, or `matlab.mock.actions.ThrowException`.

Example: `ReturnStoredValue`

Example: `AssignOutputs(7,13,42)`

Example: `ThrowException`

Examples

Assign Series of Outputs to Mock

Create a strict mock for a bank account class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"isOpen",'Strict',true);
```

Set up behavior to return empty once and then `true`.

```
import matlab.mock.actions.ReturnStoredValue
import matlab.mock.actions.AssignOutputs
when(get(behavior.isOpen),then(ReturnStoredValue,AssignOutputs(true)))
```

Use the mock.

```
isAccountOpen = mock.isOpen
```

```
isAccountOpen =

     []
```

```
isAccountOpen = mock.isOpen
```

```
isAccountOpen = logical
   1


isAccountOpen = mock.isOpen
```

```
isAccountOpen = logical
   1
```

Tips

- Each call to `then` accepts up to two actions. To specify more subsequent actions, use multiple calls to `then`. For example, to specify three actions use `then(action1,then(action2,action3))`.

See Also

Introduced in R2017a

matlab.mock.actions.StoreValue class

Package: matlab.mock.actions

Store property value

Description

The `StoreValue` action specifies that the specified value is stored when setting a property.

By default, when you set property values in strict mocks, MATLAB throws an exception. To specify that the framework stores the value of a mock object property, use the `StoreValue` class.

Construction

`action = StoreValue` stores a property value.

Methods

repeat	Repeat same action multiple times
then	Specify action

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Store Mock Property Value

Create a strict mock. By default, property interactions throw exceptions.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
properties = ["PropA" "PropB" "PropC"];
[mock, behavior] = testCase.createMock('AddedProperties',properties,"Strict",true);
```

Enable set access to `PropA`.

```
import matlab.mock.actions.StoreValue;
when(set(behavior.PropA),StoreValue);
```

Use the mock.

```
mock.PropA = 1;
```

Use the mock.

```
mock.PropB = 2;
```

```
Interactive assertion failed.

----------------
Test Diagnostic:
----------------
Unexpected set of strict mock property 'PropB'.
Assertion failed.
```

Alternatives

For a simple directive to store property values, you can use the storeValueWhen method of the `matlab.mock.TestCase` class. However, there is more functionality when you use the `StoreValue` action.

See Also

See Also

matlab.mock.TestCase | matlab.mock.actions.ReturnStoredValue | matlab.mock.actions.ThrowException | matlab.mock.PropertySetBehavior.when

Introduced in R2017a

repeat

Class: matlab.mock.actions.StoreValue
Package: matlab.mock.actions

Repeat same action multiple times

Syntax

```
repeat(n,action)
```

Description

`repeat(n,action)` repeats the same action multiple times.

Input Arguments

n — Number of times to repeat action

integer

Number of times to repeat action, specified as an integer.

Example: 5

action — Defined action

instance of `matlab.mock.actions.StoreValue`

Defined action, specified as an instance of `matlab.mock.actions.StoreValue`.

Examples

Repeat Storing of Property Value

Create a mock for a bank account class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
```

```
[mock,behavior] = testCase.createMock('AddedProperties',"IsOpen");
```

Specify behavior. Allow the `IsOpen` property to be set twice, then throw an exception.

```
import matlab.mock.actions.StoreValue
import matlab.mock.actions.ThrowException
when(set(behavior.IsOpen),then(repeat(2,StoreValue), ...
    then(ThrowException(MException('Account:setValue:tooMany', ...
    'Value set too many times.')))));
```

Use the mock.

```
for i = 1:3
    mock.IsOpen = i
end
```

```
mock =

  Mock with properties:

    IsOpen: 1


mock =

  Mock with properties:

    IsOpen: 2

Error using matlab.mock.internal.MockContext>mockPropertySetCallback (line 706)
Value set too many times.

Error in matlab.mock.internal.MockContext>@(name,obj,value)mockPropertySetCallback(name
(line 284)
            propertySetCallback = @(name, obj, value)mockPropertySetCallback(name, obj
```

See Also

Introduced in R2017a

then

Class: matlab.mock.actions.StoreValue
Package: matlab.mock.actions

Specify action

Syntax

```
then(action1)
then(action1,action2)
```

Description

`then(action1)` specifies an action for mock object interactions.

`then(action1,action2)` specifies an action and a subsequent action for mock object interactions.

Input Arguments

`action1` — Defined action
instance of `matlab.mock.actions.StoreValue`

Defined action, specified as an instance of `matlab.mock.actions.StoreValue`.

`action2` — Second defined action
instance of `matlab.mock.actions.ThrowException`

Second defined action, specified as an instance of `matlab.mock.actions.ThrowException`.

Example: `StoreValue`

Example: `ThrowException(MException('Account:deposit:Negative','Deposit amount must be positive.'))`

Examples

Store Series of Values to Mock Property

Create a mock for a bank account class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"IsOpen");
```

Specify behavior. Allow the `IsOpen` property to be set once, and then throw an exception.

```
import matlab.mock.actions.StoreValue
import matlab.mock.actions.ThrowException
when(set(behavior.IsOpen),then(StoreValue,ThrowException( ...
    MException('Account:setValue:tooMany','Value set too many times.'))));
```

Use the mock.

```
mock.IsOpen = false
```

```
mock =

  Mock with properties:

    IsOpen: 0
```

```
mock.IsOpen = true
```

```
Error using matlab.mock.internal.MockContext>mockPropertySetCallback (line 706)
Value set too many times.

Error in matlab.mock.internal.MockContext>@(name,obj,value)mockPropertySetCallback(name
(line 284)
            propertySetCallback = @(name, obj, value)mockPropertySetCallback(name, obj
```

Tips

- Each call to `then` accepts up to two actions. To specify more subsequent actions, use multiple calls to `then`. For example, to specify three actions use `then(action1,then(action2,action3))`.

See Also

Introduced in R2017a

matlab.mock.actions.ThrowException class

Package: matlab.mock.actions

Throw exception when method is called or when property is set or accessed

Description

To specify that the framework throws an exception when a mock object method is invoked or when a mock object property is set or accessed, use the `ThrowException` class. You can use this action to inject error conditions into the system under test.

Construction

`action = ThrowException` throws an exception when a method is called or a property is set or accessed.

`action = ThrowException(exception)` specifies the exception that the mock throws.

Input Arguments

`exception` — Exception to throw
scalar `MException` object

Exception for the framework to throw at method call or property interaction, specified as a scalar `MException` object.

Example: `MException('MyProduct:myID','My exception message.')`

Methods

repeat	Repeat same action multiple times

then	Specify action

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Throw Exception for Particular Mock Method Inputs

Create a mock for a bank account class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"deposit");
```

Set up behavior.

```
import matlab.mock.actions.ThrowException;
import matlab.unittest.constraints.IsLessThan;
when(behavior.deposit(IsLessThan(0)), ...
    ThrowException(MException('Account:deposit:Negative', ...
    'Deposit amount must be positive.')));
```

Use the mock.

```
mock.deposit(10)
mock.deposit(-10)
```

```
Error using matlab.mock.internal.MockContext>mockMethodCallback (line 663)
Deposit amount must be positive.

Error in matlab.mock.internal.MockContext>@(data)mockMethodCallback(data,catalog) (line
            methodCallback = @(data)mockMethodCallback(data, catalog);
```

Alternatives

For simple definition of outputs, you can use the throwExceptionWhen method of the `matlab.mock.TestCase` class. However, there is more functionality when you use the `ThrowException` action.

See Also

See Also

matlab.mock.TestCase | matlab.mock.actions.AssignOutputs | matlab.mock.MethodCallBehavior.when | matlab.mock.PropertyGetBehavior.when | matlab.mock.PropertySetBehavior.when

Introduced in R2017a

repeat

Class: matlab.mock.actions.ThrowException
Package: matlab.mock.actions

Repeat same action multiple times

Syntax

```
repeat(n,action)
```

Description

`repeat(n,action)` repeats the same action multiple times.

Input Arguments

n — Number of times to repeat action

integer

Number of times to repeat action, specified as an integer.

Example: 5

action — Defined action

instance of `matlab.mock.actions.ThrowException`

Defined action, specified as an instance of `matlab.mock.actions.ThrowException`.

Example: `ThrowException`

Example: `ThrowException(MException('Account:deposit:Negative','Deposit amount must be positive.'))`

Examples

Throwing Repeated Exceptions for Mock Method Calls

Create a mock for a bank account class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"isOpen");
```

Specify behavior.

```
import matlab.mock.actions.ThrowException
import matlab.mock.actions.AssignOutputs
when(withExactInputs(behavior.isOpen),then(repeat(2,ThrowException), ...
    then(AssignOutputs(false))));
```

Use the mock.

```
isAccountOpen = mock.isOpen
```

```
Error using matlab.mock.internal.MockContext>mockMethodCallback (line 663)
The following method call was specified to throw an exception:
 isOpen([1×1 matlab.mock.classes.Mock])

Error in matlab.mock.internal.MockContext>@(data)mockMethodCallback(data,catalog) (line
            methodCallback = @(data)mockMethodCallback(data, catalog);
```

```
isAccountOpen = mock.isOpen
```

```
Error using matlab.mock.internal.MockContext>mockMethodCallback (line 663)
The following method call was specified to throw an exception:
 isOpen([1×1 matlab.mock.classes.Mock])

Error in matlab.mock.internal.MockContext>@(data)mockMethodCallback(data,catalog) (line
            methodCallback = @(data)mockMethodCallback(data, catalog);
```

```
isAccountOpen = mock.isOpen
```

```
isAccountOpen =

  logical

   0
```

Tips

- If you repeat an action, and do not follow it with a call to the `then` method, the mock continues to return the repeated value. For example, consider the following mock of a bank account class.

```
import matlab.mock.actions.ThrowException
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock, behavior] = testCase.createMock('AddedProperties',"IsJointAccount");
```

If you repeat an action to throw an exception twice, the framework continues to throw an exception in the following code, which goes on to get the property value a third time.

```
when(get(behavior.IsJointAccount),then(repeat(2,ThrowException)));
tf = mock.IsJointAccount
tf = mock.IsJointAccount
tf = mock.IsJointAccount
```

But the following code throws an exception twice and the returns `false`.

```
import matlab.mock.actions.AssignOutputs
when(get(behavior.IsJointAccount),then(repeat(2,ThrowException), ...
    then(AssignOutputs(false))));
tf = mock.IsJointAccount
tf = mock.IsJointAccount
tf = mock.IsJointAccount
```

See Also

Introduced in R2017a

then

Class: matlab.mock.actions.ThrowException
Package: matlab.mock.actions

Specify action

Syntax

```
then(action1)
then(action1,action2)
```

Description

`then(action1)` specifies an action for mock object interactions.

`then(action1,action2)` specifies an action and a subsequent action for mock object interactions.

Input Arguments

`action1` — Defined action
instance of `matlab.mock.actions.ThrowException`

Defined action, specified as an instance of `matlab.mock.actions.ThrowException`.

Example: `ThrowException`

Example: `ThrowException(MException('Account:deposit:Negative','Deposit amount must be positive.'))`

`action2` — Second defined action
instance of `matlab.mock.actions.ThrowException` | instance of `matlab.mock.actions.AssignOutputs` | instance of `matlab.mock.actions.ReturnStoredValue` | instance of `matlab.mock.actions.StoreValue`

Second defined action, specified as an instance of `matlab.mock.actions.ThrowException`, `matlab.mock.actions.AssignOutputs`, `matlab.mock.actions.ReturnStoredValue`, or `matlab.mock.actions.StoreValue`.

Example: `ThrowException`

Example: `AssignOutputs(7,13,42)`

Examples

Throw Exceptions for Mock Method Calls

Create a mock for a bank account class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"isOpen");
```

Specify behavior.

```
import matlab.mock.actions.ThrowException
import matlab.mock.actions.AssignOutputs
when(withExactInputs(behavior.isOpen),then(ThrowException,AssignOutputs(false)));
```

Use the mock.

```
isAccountOpen = mock.isOpen
```

```
Error using matlab.mock.internal.MockContext>mockMethodCallback (line 663)
The following method call was specified to throw an exception:
 isOpen([1×1 matlab.mock.classes.Mock])

Error in matlab.mock.internal.MockContext>@(data)mockMethodCallback(data,catalog) (line
            methodCallback = @(data)mockMethodCallback(data, catalog);
```

Use the mock.

```
isAccountOpen = mock.isOpen
```

```
isAccountOpen =

  logical
```

0

Tips

- Each call to `then` accepts up to two actions. To specify more subsequent actions, use multiple calls to `then`. For example, to specify three actions use `then(action1,then(action2,action3))`.

See Also

Introduced in R2017a

matlab.mock.AnyArguments class

Package: matlab.mock

Match any number of arguments

Description

Use the `AnyArguments` class to match any number of arguments when specifying mock behavior or qualifying mock interactions.

Construction

`AnyArguments` matches an unlimited, unspecified number of arguments, including zero. When defining mock behavior or qualifying mock interactions, specify `AnyArguments` as the last argument in the argument list.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Match Any Number of Arguments

Match any number of arguments.

```
import matlab.mock.AnyArguments
import matlab.mock.actions.ThrowException

testCase = matlab.mock.TestCase.forInteractiveUse;

% Create a mock for a bank account class
[saboteurAccount,behavior] = testCase.createMock('AddedMethods',"deposit");
```

```
% Define behavior to throw exception with any input argument
when(behavior.deposit(AnyArguments),ThrowException)

% All of the following interactions throw an exception:
saboteurAccount.deposit;
saboteurAccount.deposit(-10);
saboteurAccount.deposit(10);
saboteurAccount.deposit('a','b','c');
```

Alternatives

The `AnyArguments` class is functionally similar to using the `withAnyInputs` method of the `matlab.mock.MethodCallBehavior` class. For example, the following code blocks are similar.

```
% Using the AnyArguments class
import matlab.mock.AnyArguments;
testCase.verifyCalled(behavior.myMethod(AnyArguments));

% Using the withAnyInputs method
testCase.verifyCalled(withAnyInputs(behavior.myMethod))
```

However, `AnyArguments` requires that the mock is the first input argument, and `withAnyInputs` does not. The `MethodCallBehavior` class provides additional methods to specify behavior and record interactions, such as specification of exact inputs or a number of outputs.

See Also

See Also

matlab.mock.TestCase

Introduced in R2017a

matlab.mock.constraints.WasAccessed class

Package: matlab.mock.constraints

Constraint determining property get access

Description

The `WasAccessed` constraint produces a qualification failure if an actual value is not a `PropertyBehavior` instance, or if the property that corresponds to the `PropertyBehavior` was not accessed the specified number of times.

The number of times a property is accessed includes the number of times that MATLAB implicitly accesses the property. For example, if you display a mock object, MATLAB accesses the object properties to display their values.

Construction

`constraint = WasAccessed` provides a constraint that determines the property get access. If a property was accessed at least once, the constraint is satisfied. To qualify that a property was not accessed, negate the `WasAccessed` constraint with the tilde (~) operator.

`constraint = WasAccessed('WithCount',n)` provides a constraint that is satisfied when a property was accessed exactly `n` times.

If you negate `WasAccessed` with this syntax, if the property was not accessed exactly `n` times, the constraint passes. For example, if a property was accessed 4 times, `~WasAccessed('WithCount',3)` passes and `~WasAccessed('WithCount',4)` fails.

Input Arguments

n — Number of times of property get access
integer

Number of times of property get access, specified as an integer.

Properties

`Count` — Property access count
integer

Property access count, returned as an integer. This property is read-only once the constraint is constructed. You can specify it during constraint construction.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Qualify Mock Property Get Access

Create a mock for a person class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[fakePerson,behavior] = testCase.createMock('AddedProperties',["Name" "Age"]);
fakePerson.Name = 'David';
fprintf(1,'The person''s name is %s.\n',fakePerson.Name);
```

```
The person's name is David.
```

Construct passing cases.

```
import matlab.mock.constraints.WasAccessed
testCase.verifyThat(behavior.Name,WasAccessed)
```

```
Interactive verification passed.
```

```
testCase.verifyThat(behavior.Age,~WasAccessed)
```

```
Interactive verification passed.
```

```
testCase.verifyThat(behavior.Name,WasAccessed('WithCount',1))
```

```
Interactive verification passed.
```

Construct failing cases.

```
testCase.verifyThat(behavior.Name,~WasAccessed)
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
Negated WasAccessed failed.
--> Property 'Name' was unexpectedly accessed 1 time(s).

Specified property access:
    PropertyGetBehavior
        <Mock>.Name
```

```
testCase.verifyThat(behavior.Age,WasAccessed)
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
WasAccessed failed.
--> Property 'Age' was never accessed.

Specified property access:
    PropertyGetBehavior
        <Mock>.Age
```

```
testCase.verifyThat(behavior.Name,WasAccessed('WithCount',5))
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
WasAccessed failed.
--> Property 'Name' was not accessed the expected number of times.

    Actual property access count:
              1
    Expected property access count:
              5

Specified property access:
```

```
PropertyGetBehavior
    <Mock>.Name
```

See Also

See Also

matlab.mock.TestCase | matlab.mock.PropertyBehavior

Introduced in R2017a

matlab.mock.constraints.WasCalled class

Package: matlab.mock.constraints

Constraint determining method call

Description

The `WasCalled` constraint produces a qualification failure if an actual value is not a `MethodCallBehavior` instance, or if the method that corresponds to the `MethodCallBehavior` was not called the specified number of times.

Construction

`constraint = WasCalled` provides a constraint that determines a method call. If a method was called at least once, the constraint is satisfied. To qualify that a method was not called, negate the `WasCalled` constraint with the tilde (~) operator.

`constraint = WasCalled('WithCount',n)` provides a constraint that is satisfied when a method is called exactly `n` times.

If you negate `WasCalled` with this syntax, if the method was not called exactly `n` times, the constraint passes. For example, if a method was called four times, `~WasCalled('WithCount',3)` passes and `~WasCalled('WithCount',4)` fails.

Input Arguments

`n` — Number of method calls
integer

Number of method calls, specified as an integer.

Properties

`Count` — Method call count
integer

Method call count, returned as an integer. This property is read-only. You can specify it during constraint construction.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Qualify Mock Method Calls

Create a mock for a bank account class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[fakeAccount,behavior] = testCase.createMock('AddedMethods',"deposit");
```

Use the mock account.

```
fakeAccount.deposit(10);
fakeAccount.deposit(20);
fakeAccount.deposit(10);
```

Construct passing cases.

```
import matlab.mock.constraints.WasCalled
testCase.verifyThat(behavior.deposit(10),WasCalled)
```

```
Interactive verification passed.
```

```
testCase.verifyThat(behavior.deposit(10),WasCalled('WithCount',2))
```

```
Interactive verification passed.
```

```
import matlab.unittest.constraints.IsGreaterThan
testCase.verifyThat(behavior.deposit(IsGreaterThan(100)),~WasCalled)
```

```
Interactive verification passed.
```

Construct failing cases.

```
testCase.verifyThat(behavior.deposit(100),WasCalled);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
WasCalled failed.
--> Method 'deposit' was not called with the specified signature.
--> Observed method call(s) with any signature:
        deposit([1×1 matlab.mock.classes.Mock], 10)
        deposit([1×1 matlab.mock.classes.Mock], 20)
        deposit([1×1 matlab.mock.classes.Mock], 10)

Specified method call:
    MethodCallBehavior
        [...] = deposit(<Mock>, 100)
```

```
testCase.verifyThat(behavior.deposit(20),WasCalled('WithCount',2))
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
WasCalled failed.
--> Method 'deposit' was not called the expected number of times with the specified sig

    Actual method call count:
              1
    Expected method call count:
              2
--> Observed method call(s) with any signature:
        deposit([1×1 matlab.mock.classes.Mock], 10)
        deposit([1×1 matlab.mock.classes.Mock], 20)
        deposit([1×1 matlab.mock.classes.Mock], 10)

Specified method call:
    MethodCallBehavior
        [...] = deposit(<Mock, 20)
```

```
testCase.verifyThat(behavior.deposit(IsGreaterThan(50)),WasCalled)
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
```

```
----------------------
WasCalled failed.
--> Method 'deposit' was not called with the specified signature.
--> Observed method call(s) with any signature:
        deposit([1×1 matlab.mock.classes.Mock], 10)
        deposit([1×1 matlab.mock.classes.Mock], 20)
        deposit([1×1 matlab.mock.classes.Mock], 10)

Specified method call:
    MethodCallBehavior
        [...] = deposit(<Mock>, <IsGreaterThan constraint>)
```

See Also

See Also

matlab.mock.TestCase | matlab.mock.MethodCallBehavior

Introduced in R2017a

matlab.mock.constraints.WasSet class

Package: matlab.mock.constraints

Constraint determining property set interaction

Description

The `WasSet` constraint produces a qualification failure if an actual value is not a `PropertyBehavior` instance, or if the property that corresponds to the `PropertyBehavior` was not set the specified number of times.

Construction

`constraint = WasSet` provides a constraint that determines property set interaction. If a property value was set at least once, the constraint is satisfied. To qualify that a property was not set, negate the `WasSet` constraint with the tilde (~) operator.

`constraint = WasSet(Name,Value)` provides a constraint with additional options specified by one or more `Name,Value` pair arguments. For example, `WasSet('ToValue',42)` constructs a constraint that is satisfied if a property value is set to 42, and `WasSet('ToValue',42,'WithCount',3)` constructs a constraint that is satisfied if a property value is set to 42 exactly 3 times.

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example:

`'ToValue'` — Specified property value
scalar | vector | matrix | multidimensional array

Specified property values, specified as a scalar, vector, matrix, or multidimensional array. Values can be any data type, and relate to the property specified by behavior.

Example: `'Joe'`

Example: `[1 2 3;4 5 6]`

`'WithCount'` — Number of times of property was set
integer

Number of times the property was set, specified as an integer.

If you negate `WasSet` with this syntax, if the property value was not set exactly `n` times, the constraint passes. For example, if a property was set four times, `~WasSet('WithCount',3)` passes and `~WasSet('WithCount',4)` fails.

Example: 5

Properties

`Value` — Property values
scalar | vector | matrix | multidimensional array

Property values, specified as a scalar, vector, matrix, or multidimensional array. Values can be any data type, and relate to the property specified by behavior.

`Count` — Property set access count
integer

Property set access count, returned as an integer. This property is read-only once the constraint is constructed. You can specify it during constraint construction.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Qualify Mock Property Set Access

Create a mock for a person class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[fakePerson,behavior] = testCase.createMock('AddedProperties',["Name" "Age"]);
```

Use the mock.

```
fakePerson.Name = 'David';
```

Construct passing cases.

```
import matlab.mock.constraints.WasSet
testCase.verifyThat(behavior.Name,WasSet)
```

```
Interactive verification passed.
```

```
testCase.verifyThat(behavior.Age,~WasSet)
```

```
Interactive verification passed.
```

```
testCase.verifyThat(behavior.Name,WasSet('ToValue','David'))
```

```
Interactive verification passed.
```

```
testCase.verifyThat(behavior.Name,WasSet('WithCount',1))
```

```
Interactive verification passed.
```

Construct failing cases.

```
testCase.verifyThat(behavior.Name,~WasSet)
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
Negated WasSet failed.
--> Property 'Name' was unexpectedly set to the specified value 1 time(s).
--> Observed property set(s) to any value:
        <Mock>.Name = 'David'
```

```
Specified property set:
    PropertySetBehavior
        <Mock>.Name = <IsAnything constraint>

testCase.verifyThat(behavior.Age,WasSet)

Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
WasSet failed.
--> Property 'Age' was never set.

Specified property set:
    PropertySetBehavior
        <Mock>.Age = <IsAnything constraint>

testCase.verifyThat(behavior.Name,WasSet('ToValue','Andy'))

Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
WasSet failed.
--> Property 'Name' was not set to the specified value.
--> Observed property set(s) to any value:
        <Mock>.Name = 'David'

Specified property set:
    PropertySetBehavior
        <Mock>.Name = 'Andy'

testCase.verifyThat(behavior.Name,WasSet('WithCount',5))

Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
WasSet failed.
--> Property 'Name' was not set to the specified value the expected number of times.

    Actual property set count:
              1
```

```
    Expected property set count:
             5
--> Observed property set(s) to any value:
        <Mock>.Name = 'David'

Specified property set:
    PropertySetBehavior
        <Mock>.Name = <IsAnything constraint>
```

See Also

See Also

matlab.mock.TestCase | matlab.mock.PropertyBehavior

Introduced in R2017a

matlab.mock.MethodCallBehavior class

Package: matlab.mock

Specify mock object method behavior and qualify method calls

Description

Use the `MethodCallBehavior` object to specify behavior for a mock object method and to qualify method calls.

There are several ways to define behavior for a mock object method.

- Pass a mock object action, such as `matlab.mock.actions.AssignOutputs`, to the `when` method of the `MethodCallBehavior` class.
- Pass a `MethodCallBehavior` object to a method of the matlab.mock.TestCase class, such as `assignOutputsWhen`.

There are several ways to qualify interactions with the mock object method.

- Pass a mock object constraint, such as `matlab.mock.constraints.WasCalled`, to the `verifyThat`, `assertThat`, `fatalAssertThat`, or `assumeThat` method of the matlab.unittest.TestCase.
- Pass a `MethodCallBehavior` object to a method of the matlab.mock.TestCase class, such as `verifyCalled` or `assumeNotCalled`.

Construction

The mocking framework constructs a `MethodCallBehavior` instance when you call a method of the mock behavior object.

Methods

when	Specify mock object method behavior
withAnyInputs	Specify mock object method call with any number of inputs with any value

withExactInputs	Specify mock object method call with only object as input
withNargout	Specify mock object method call with defined number of output arguments

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.mock.TestCase | matlab.mock.constraints.WasCalled

Introduced in R2017a

when

Class: matlab.mock.MethodCallBehavior
Package: matlab.mock

Specify mock object method behavior

Syntax

```
when(behavior,action)
```

Description

`when(behavior,action)` specifies the action that a mock object method takes when it is called with the inputs defined by `behavior`.

Input Arguments

`behavior` — Behavior of mock

`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `withExactInputs(myMockBehavior.myMockedMethod)`

`action` — Defined action

instance of `matlab.mock.actions.AssignOutputs` | instance of `matlab.mock.actions.ThrowException`

Defined action, specified as an instance of `matlab.mock.actions.AssignOutputs` or `matlab.mock.actions.ThrowException`.

Example: `AssignOutputs(7,13,42)`

Example: `ThrowException(MException('Account:deposit:Negative','Deposit amount must be positive.'))`

Examples

Specify Mock Method Behavior

Create a mock for a triangle class. The mock has one method, `sideLengths`.

```
import matlab.mock.actions.AssignOutputs;
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"sideLengths");
```

Set up behavior. Regardless of the inputs to the `sideLengths` method, the mock returns the values 2, 3, and 4.

```
when(withAnyInputs(behavior.sideLengths),AssignOutputs(2,3,4))
```

Call the `sideLengths` method of the mock object.

```
[a,b,c] = mock.sideLengths
```

```
a = 2
```

```
b = 3
```

```
c = 4
```

Call the `sideLengths` method again using different inputs and only two outputs.

```
[a,b] = mock.sideLengths(13,"inputText")
```

```
a = 2
```

```
b = 3
```

See Also

See Also

matlab.mock.actions.AssignOutputs | matlab.mock.actions.ThrowException

Introduced in R2017a

withAnyInputs

Class: matlab.mock.MethodCallBehavior
Package: matlab.mock

Specify mock object method call with any number of inputs with any value

Syntax

```
withAnyInputs(behavior)
```

Description

`withAnyInputs(behavior)` specifies a mock object method call with any number of inputs that can have any value.

Input Arguments

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `myMockBehavior.myMockedMethod`

Examples

Specify Method Call with Any Inputs

Create a mock with a `myMethod` method.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"myMethod");
```

Set up the behavior. Regardless of the inputs to the method, it returns `"hello"`.

```
testCase.assignOutputsWhen(withAnyInputs(behavior.myMethod),"hello")
```

Call the method with various inputs.

```
output = mock.myMethod
```

```
output =
"hello"
```

```
output = mock.myMethod(123)
```

```
output =
"hello"
```

```
output = myMethod("abc",mock)
```

```
output =
"hello"
```

Verify that the method was called at least once with some set of inputs.

```
testCase.verifyCalled(withAnyInputs(behavior.myMethod))
```

```
Interactive verification passed.
```

See Also

See Also

matlab.mock.MethodCallBehavior.withExactInputs

Introduced in R2017a

withExactInputs

Class: matlab.mock.MethodCallBehavior
Package: matlab.mock

Specify mock object method call with only object as input

Syntax

```
withExactInputs(behavior)
```

Description

`withExactInputs(behavior)` specifies a mock object method call with only the object as an input.

Input Arguments

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `myMockBehavior.myMockedMethod`

Examples

Specify Method Call with Object Only

Create a mock with a `myMethod` method.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',{'myMethod'});
```

Set up behavior. If the method is called with only the object as input, return `"hello"`.

```
testCase.assignOutputsWhen(withExactInputs(behavior.myMethod),"hello")
```

Call the method with only the object as an input.

```
output = myMethod(mock)
```

```
output =
"hello"
```

Call the method with additional inputs. Since this behavior is not defined, the mock returns the default value.

```
output = mock.myMethod(123)
```

```
output =

     []
```

Verify that the method was called at least once with only the object as an input.

```
testCase.verifyCalled(withExactInputs(behavior.myMethod))
```

```
Interactive verification passed.
```

See Also

See Also

matlab.mock.MethodCallBehavior.withAnyInputs

Introduced in R2017a

withNargout

Class: matlab.mock.MethodCallBehavior
Package: matlab.mock

Specify mock object method call with defined number of output arguments

Syntax

```
withNargout(n,behavior)
```

Description

`withNargout(n,behavior)` specifies a mock object method call with a defined number of output arguments.

Input Arguments

n — Number of outputs

integer

Number of outputs from mock object method, specified as an integer.

Example: 3

behavior — Behavior of mock

`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `myMockBehavior.myMockedMethod`

Examples

Specify Method Call with Specific Number of Outputs

Create a mock for a triangle class.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mockQuad,behavior] = testCase.createMock('AddedMethods',"sideLengths");
```

Set up behavior. If the `sideLengths` method is called with only the object as input and with one output, then return an array of three values. If it is called with only the object as input and with three outputs, then return the three values. Otherwise, return the default value of an empty array.

```
import matlab.mock.actions.AssignOutputs
when(withNargout(1,withExactInputs(behavior.sideLengths)), ...
    AssignOutputs([1 2 3]))
when(withNargout(3,withExactInputs(behavior.sideLengths)), ...
    AssignOutputs(1,2,3))
```

Call the `sideLengths` method with only the object as an input and one output.

```
len = mockQuad.sideLengths
```

```
len =

     1     2     3
```

Verify that the `sideLengths` method was called at least once with one output argument.

```
import matlab.mock.constraints.WasCalled
testCase.verifyThat(withNargout(1, ...
    withExactInputs(behavior.sideLengths)),WasCalled)
```

```
Interactive verification passed.
```

Verify that the `sideLengths` method was not called with three output arguments.

```
testCase.verifyThat(withNargout(3, ...
    withExactInputs(behavior.sideLengths)),~WasCalled)
```

```
Interactive verification passed.
```

See Also

Introduced in R2017a

matlab.mock.PropertyBehavior class

Package: matlab.mock

Specify mock object property behavior and qualify interactions

Description

Use the `PropertyBehavior` class to specify mock object property behavior and qualify interactions.

There are several ways to qualify interactions with mock object properties.

- Pass the `PropertyBehavior` instance to a method of the matlab.mock.TestCase, such as `verifyAccessed` or `assumeNotSet`.
- Pass the `PropertyBehavior` instance and a mock object constraint, such as `matlab.mock.constraints.WasAccessed`, to the `verifyThat`, `assertThat`, `fatalAssertThat`, or `assumeThat` method of the matlab.unittest.TestCase class.

To define behavior for a mock object property, you first need a `PropertyGetBehavior` or `PropertySetBehavior` instance. To create one of these instances, call a `PropertyBehavior` method. For more information on defining property behavior, see matlab.mock.PropertyGetBehavior or matlab.mock.PropertySetBehavior.

Construction

The mocking framework constructs a `PropertyBehavior` instance when you access a property on the mock behavior object.

Methods

get	Construct object to define mock property get behavior
setToValue	Construct object to define behavior when mocked property is set to specific value

set	Construct object to define mock property set behavior

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.mock.PropertyGetBehavior | matlab.mock.PropertySetBehavior | matlab.mock.constraints.WasSet | matlab.mock.constraints.WasAccessed

Introduced in R2017a

get

Class: matlab.mock.PropertyBehavior
Package: matlab.mock

Construct object to define mock property get behavior

Syntax

```
getBehavior = get(behavior)
```

Description

`getBehavior = get(behavior)` constructs a `PropertyGetBehavior` object to define mock property get behavior. Typically you use the `get` method to construct the `PropertyGetBehavior` implicitly when you define mock behavior.

Input Arguments

`behavior` — Behavior of mock

`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `myMockBehavior.MyProperty`

Examples

Define Behavior with `PropertyGetBehavior` Object

Create a mock for a person class with a `Name` property.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"Name");
```

Create a `PropertyGetBehavior` and set up the behavior. The mock returns `"David"` when you get the value of the `Name` property.

```
getBehavior = get(behavior.Name);
testCase.assignOutputsWhen(getBehavior,"David")
```

Alternatively, you can create the `PropertyGetBehavior` object implicitly with the behavior definition.

```
testCase.assignOutputsWhen(get(behavior.Name),"David")
```

Access the `Name` property.

```
name = mock.Name
```

```
name =
"David"
```

See Also

See Also

matlab.mock.PropertyGetBehavior

Introduced in R2017a

setToValue

Class: matlab.mock.PropertyBehavior
Package: matlab.mock

Construct object to define behavior when mocked property is set to specific value

Syntax

```
setBehavior = setToValue(behavior,value)
```

Description

`setBehavior = setToValue(behavior,value)` constructs a `PropertySetBehavior` object to define behavior when mocked property is set to a specific value. Typically you use the `setToValue` method to construct the `PropertySetBehavior` implicitly when you define mock behavior.

Input Arguments

`behavior` — Behavior of mock

`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `myMockBehavior.MyProperty`

`value` — Property values

scalar | vector | matrix | multidimensional array | constraint | behavior object

Property values that the mock property must be set to, specified as a scalar, vector, matrix, multidimensional array, constraint, or behavior object. Values can be any data type, and relate to the property specified by behavior.

Example: `"hello"`

Example: `42`

Example: `[1 2 3]`

Example: `matlab.unittest.constraints.IsLessThan(10)`

Examples

Define Behavior for Specific Property Values

Create a mock for a person class with a `Name` property.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"Name");
```

Create a `PropertySetBehavior` object and set up the behavior. The mock throws an exception when you set the value of the `Name` property to `"David"`.

```
setBehavior = setToValue(behavior.Name,"David");
testCase.throwExceptionWhen(setBehavior)
```

Alternatively, you can create the `PropertySetBehavior` object implicitly with the behavior definition.

```
testCase.throwExceptionWhen(behavior.Name.setToValue("David"))
```

Set the value of the `Name` property.

```
mock.Name = "Andy";
mock.Name = "David";
```

```
Error using matlab.mock.internal.MockContext>mockPropertySetCallback (line 706)
The following property set was specified to throw an exception:
  <Mock>.Name = "David"

Error in matlab.mock.internal.MockContext>@(name,obj,value)mockPropertySetCallback(name
            propertySetCallback = @(name, obj, value)mockPropertySetCallback(name, obj
```

See Also

See Also

matlab.mock.PropertySetBehavior

Introduced in R2017a

set

Class: matlab.mock.PropertyBehavior
Package: matlab.mock

Construct object to define mock property set behavior

Syntax

```
setBehavior = set(behavior)
```

Description

`setBehavior = set(behavior)` constructs a `PropertySetBehavior` object to define mock property set behavior. Typically you use the `set` method to construct the `PropertySetBehavior` implicitly when you define mock behavior.

Input Arguments

`behavior` — Behavior of mock

`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `myMockBehavior.MyProperty`

Examples

Define Behavior with `PropertySetBehavior` Object

Create a mock for a person class with a `Name` property.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"Name");
```

Create a `PropertySetBehavior` object and set up the behavior. The mock throws an exception when you set the value of the `Name` property.

```
setBehavior = set(behavior.Name);
testCase.throwExceptionWhen(setBehavior)
```

Alternatively, you can create the `PropertySetBehavior` object implicitly with the behavior definition.

```
testCase.throwExceptionWhen(set(behavior.Name))
```

Set the value of the `Name` property.

```
mock.Name = "Andy";
```

```
Error using matlab.mock.internal.MockContext>mockPropertySetCallback (line 706)
The following property set was specified to throw an exception:
<Mock>.Name = "Andy"

Error in matlab.mock.internal.MockContext>@(name,obj,value)mockPropertySetCallback(name
            propertySetCallback = @(name, obj, value)mockPropertySetCallback(name, obj
```

See Also

See Also

matlab.mock.PropertySetBehavior

Introduced in R2017a

matlab.mock.PropertyGetBehavior class

Package: matlab.mock

Specify mock property get behavior

Description

Use the `PropertyGetBehavior` class to specify mock object get behavior. There are several ways to specify get behavior.

- Pass a mock object action, such as `matlab.mock.actions.AssignOutputs`, to the `when` method.
- Pass a `PropertyGetBehavior` object to a method of the matlab.mock.TestCase class, such as `assignOutputsWhen`.

To qualify mock property interactions, see matlab.mock.PropertyBehavior.

Construction

The mocking framework creates a `PropertyGetBehavior` instance when you call the matlab.mock.PropertyBehavior.get method. Typically, you construct the `PropertyGetBehavior` implicitly. For example, `testCase.assignOutputsWhen(get(behavior.MyProperty),'abc')`.

Methods

when	Specify mock object property access action

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.mock.PropertyBehavior | matlab.mock.TestCase

Introduced in R2017a

when

Class: matlab.mock.PropertyGetBehavior
Package: matlab.mock

Specify mock object property access action

Syntax

```
when(behavior,action)
```

Description

`when(behavior,action)` specifies the action that a mock object property takes when it is accessed.

Input Arguments

`behavior` — Behavior of mock

`matlab.mock.PropertyGetBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyGetBehavior` instance. To create an instance of `matlab.mock.PropertyGetBehavior`, call the `matlab.mock.PropertyBehavior.get` method with the behavior object.

Example: `get(myMockBehavior.MyProperty)`

`action` — Defined action

instance of `matlab.mock.actions.ReturnStoredValue` | instance of `matlab.mock.actions.ThrowException`

Defined action, specified as an instance of `matlab.mock.actions.ReturnStoredValue` or `matlab.mock.actions.ThrowException`.

Example: `ReturnStoredValue`

Example: `ThrowException(MException('Account:deposit:Negative','Deposit amount must be positive.'))`

Examples

Specify Mock Property Access Behavior

Create a mock for a person class. The mock has one property, `Name`.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"Name");
```

Set up the behavior. When the property is accessed, return the value `"David"`.

```
import matlab.mock.actions.AssignOutputs
when(get(behavior.Name),AssignOutputs("David"))
```

Access the property.

```
name = mock.Name
```

```
name =
"David"
```

See Also

See Also

matlab.mock.PropertyBehavior.get | matlab.mock.actions.ReturnStoredValue | matlab.mock.actions.ThrowException

Introduced in R2017a

matlab.mock.PropertySetBehavior class

Package: matlab.mock

Specify mock object set behavior

Description

Use the `PropertySetBehavior` class to specify mock object set behavior. There are several ways to specify property set behavior.

- Pass a mock object action, such as `matlab.mock.actions.StoreValue`, to the `when` method.
- Pass a `PropertySetBehavior` object to a method of the matlab.mock.TestCase class, such as `storeValueWhen`.

To qualify mock property interactions, see matlab.mock.PropertyBehavior.

Construction

The mocking framework creates a `PropertySetBehavior` instance when you call the matlab.mock.PropertyBehavior.set or matlab.mock.PropertyBehavior.setToValue method. Typically, you construct the `PropertySetBehavior` implicitly. For example, `testCase.throwExceptionWhen(set(behavior.MyProperty))`.

Methods

when	Specify mock object property set action

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.mock.PropertyBehavior | matlab.mock.TestCase

Introduced in R2017a

when

Class: matlab.mock.PropertySetBehavior
Package: matlab.mock

Specify mock object property set action

Syntax

```
when(behavior,action)
```

Description

`when(behavior,action)` specifies the action that a mock object property takes when it is set.

Input Arguments

`behavior` — Behavior of mock

`matlab.mock.PropertySetBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertySetBehavior` instance. To create an instance of `matlab.mock.PropertySetBehavior`, call the `matlab.mock.PropertyBehavior.set` or `matlab.mock.PropertyBehavior.setToValue` method with the behavior object.

Example: `set(myMockBehavior.MyProperty)`

Example: `setToValue(myMockBehavior.MyProperty,13)`

`action` — Defined action

instance of `matlab.mock.actions.StoreValue` | instance of `matlab.mock.actions.ThrowException`

Defined action, specified as an instance of `matlab.mock.actions.StoreValue` or `matlab.mock.actions.ThrowException`.

Example: `StoreValue`

Example: `ThrowException(MException('Account:deposit:Negative','Deposit amount must be positive.'))`

Examples

Specify Mock Property Set Behavior

Create a strict mock for a person class. The mock has one property, `Name`.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"Name",'Strict',true);
```

Set up the behavior. When the property is set, store the value, and when the property is accessed, return the value. Without defining this behavior, strict mocks throw an exception when setting or accessing the property.

```
import matlab.mock.actions.StoreValue
import matlab.mock.actions.ReturnStoredValue
when(set(behavior.Name),StoreValue)
when(get(behavior.Name),ReturnStoredValue)
```

Set the property. The property access is implicit because we are displaying the result.

```
mock.Name = "David"
```

```
mock 
  Mock with properties:

    Name: "David"
```

See Also

See Also

matlab.mock.PropertyBehavior.set | matlab.mock.PropertyBehavior.setToValue | matlab.mock.actions.StoreValue | matlab.mock.actions.ThrowException

Introduced in R2017a

matlab.mock.TestCase class

Package: matlab.mock
Superclasses: matlab.unittest.TestCase

`TestCase` to write tests with mocking framework

Description

Use the `matlab.mock.TestCase` class to write tests that use the mocking framework. The `matlab.mock.TestCase` derives from the `matlab.unittest.TestCase` class.

Construction

The testing framework constructs the `matlab.mock.TestCase` instances.

Methods

assertAccessed	Assert that a property was accessed
assertCalled	Assert that a method was called with certain input values
assertSet	Assert that a property was set
assertNotAccessed	Assert that a property was not accessed
assertNotCalled	Assert that a method was not called with certain input values
assertNotSet	Assert that a property was not set
assignOutputsWhen	Define return values for method call or property access
assumeAccessed	Assume that a property was accessed
assumeCalled	Assume that a method was called with certain input values
assumeSet	Assume that a property was set

assumeNotAccessed	Assume that a property was not accessed
assumeNotCalled	Assume that a method was not called with certain input values
assumeNotSet	Assume that a property was not set
createMock	Create mock object
fatalAssertAccessed	Fatally assert that a property was accessed
fatalAssertCalled	Fatally assert that a method was called with certain input values
fatalAssertSet	Fatally assert that a property was set
fatalAssertNotAccessed	Fatally assert that a property was not accessed
fatalAssertNotCalled	Fatally assert that a method was not called with certain input values
fatalAssertNotSet	Fatally assert that a property was not set
forInteractiveUse	Create `TestCase` for interactive use
returnStoredValueWhen	Return stored property value
storeValueWhen	Store property value
throwExceptionWhen	Throw exception for method call or property interaction
verifyAccessed	Verify that a property was accessed
verifyCalled	Verify that a method was called with certain input values
verifySet	Verify that a property was set
verifyNotAccessed	Verify that a property was not accessed
verifyNotCalled	Verify that a method was not called with certain input values
verifyNotSet	Verify that a property was not set

Inherited Methods

addTeardown	Dynamically add teardown routine
applyFixture	Use fixture with `TestCase`

forInteractiveUse	Create TestCase for interactive use
getSharedTestFixtures	Provide access to shared test fixtures
log	Record diagnostic information
run	Run `TestCase` test

Also, the `TestCase` class inherits methods from these classes:

matlab.unittest.qualifications.Assertable	Qualification to validate preconditions of a test
matlab.unittest.qualifications.Assumable	Qualification to filter test content
matlab.unittest.qualifications.FatalAssertable	Qualification to abort test execution
matlab.unittest.qualifications.Verifiable	Qualification to produce soft failure conditions

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Write Test Using Mock

Write a test using a mock.

```
import matlab.unittest.constraints.IsLessThan;
testCase = matlab.mock.TestCase.forInteractiveUse;

% Create a mock for a bank account class
[mock, behavior] = testCase.createMock('AddedMethods',["deposit" "isOpen"]);

% Set up behavior
```

```
testCase.throwExceptionWhen(behavior.deposit(IsLessThan(0)), ...
    MException('Account:deposit:Negative', ...
    'Deposit amount must be positive.'));

% Use mock object
mock.deposit(100);
testCase.verifyError(@() mock.deposit(-10), 'Account:deposit:Negative');

% Passing verifications
testCase.verifyCalled(behavior.deposit(100),...
    'A $100 deposit should have been made.');
testCase.assertNotCalled(behavior.deposit(0));
testCase.assertCalled(behavior.deposit(IsLessThan(0)));

% Failing assertion
testCase.assertCalled(withExactInputs(behavior.isOpen));
```

See Also

See Also

matlab.unittest.TestCase

Introduced in R2017a

assertAccessed

Class: matlab.mock.TestCase
Package: matlab.mock

Assert that a property was accessed

Syntax

```
assertAccessed(testcase,behavior,diagnostic)
```

Description

`assertAccessed(testcase,behavior,diagnostic)` asserts that a property was accessed.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assert Property Access

Assert a property was accessed.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
value = mock.PropertyFoo;
```

Test passing cases.

```
testCase.assertAccessed(behavior.PropertyFoo);
testCase.assertAccessed(behavior.PropertyFoo, ...
    'PropertyFoo should have been accessed.');
```

Test failing cases.

```
testCase.assertAccessed(behavior.PropertyBar);
```

Tips

Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assertAccessed` method is functionally equivalent to using the matlab.mock.constraints.WasAccessed constraint with the assertThat method of the `Assertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assertAccessed method
testCase.assertAccessed(behavior.PropertyFoo);

% Using the WasAccessed constraint with assertThat method
import matlab.mock.constraints.WasAccessed;
testCase.assertThat(behavior.PropertyFoo,WasAccessed);
```

However, there is more functionality when you use the `WasAccessed` constraint. For instance, you can specify a property was accessed a certain number of times.

See Also

See Also

matlab.mock.constraints.WasAccessed

Introduced in R2017a

assertCalled

Class: matlab.mock.TestCase
Package: matlab.mock

Assert that a method was called with certain input values

Syntax

```
assertCalled(testcase,behavior,diagnostic)
```

Description

`assertCalled(testcase,behavior,diagnostic)` asserts that a method was called with certain input values.

Input Arguments

`testcase` — Instance of test case

`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock

`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `withExactInputs(myMockBehavior.myMockedMethod)`

`diagnostic` — Diagnostic information to display

string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assert Method Call

Assert a method was called.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',["foo","bar"]);
mock.foo(123);
```

Test passing cases.

```
testCase.assertCalled(behavior.foo(123));
testCase.assertCalled(behavior.foo(123), ...
    'Method foo should have been called with input 123.');
```

Test failing cases.

```
testCase.assertCalled(behavior.foo(456));
testCase.assertCalled(withExactInputs(behavior.bar));
```

Tips

Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assertCalled` method is functionally equivalent to using the matlab.mock.constraints.WasCalled constraint with the assertThat method of the `Assertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assertCalled method
testCase.assertCalled(behavior.foo(123), ...
    'Method foo should have been called with input 123.')

% Using the WasCalled constraint with assertThat method
import matlab.mock.constraints.WasCalled;
testCase.assertThat(behavior.foo(123),WasCalled, ...
    'Method foo should have been called with input 123.');
```

However, there is more functionality when you use the `WasCalled` constraint. For instance, you can specify a method was called a certain number of times.

See Also

See Also

matlab.mock.constraints.WasCalled

Introduced in R2017a

assertSet

Class: matlab.mock.TestCase
Package: matlab.mock

Assert that a property was set

Syntax

```
assertSet(testcase,behavior,diagnostic)
```

Description

`assertSet(testcase,behavior,diagnostic)` asserts that a property was set.

Input Arguments

`testcase` — Instance of test case

`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock

`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display

string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assert Property Set

Assert a property was set.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
mock.PropertyFoo = 123;
```

Test passing cases.

```
testCase.assertSet(behavior.PropertyFoo);
testCase.assertSet(behavior.PropertyFoo, 'PropertyFoo should have been set.');
```

Test failing cases.

```
testCase.assertSet(behavior.PropertyBar);
```

Tips

Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assertSet` method is functionally equivalent to using the matlab.mock.constraints.WasSet constraint with the assertThat method of the `Assertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assertSet method
testCase.assertSet(behavior.PropertyFoo);

% Using the WasSet constraint with assertThat method
import matlab.mock.constraints.WasSet;
testCase.assertThat(behavior.PropertyFoo, WasSet);
```

However, there is more functionality when you use the `WasSet` constraint. For instance, you can specify a property was set a certain number of times.

See Also

See Also

matlab.mock.constraints.WasSet

Introduced in R2017a

assertNotAccessed

Class: matlab.mock.TestCase
Package: matlab.mock

Assert that a property was not accessed

Syntax

```
assertNotAccessed(testcase,behavior,diagnostic)
```

Description

`assertNotAccessed(testcase,behavior,diagnostic)` asserts that a property was not accessed.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assert Property Access

Assert a property was not accessed.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',...
    ["PropertyFoo","PropertyBar"]);
value = mock.PropertyFoo;
```

Test passing cases.

```
testCase.assertNotAccessed(behavior.PropertyBar);
```

Test failing cases.

```
testCase.assertNotAccessed(behavior.PropertyFoo, ...
    'PropertyFoo should not have been accessed.');
```

Tips

Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assertNotAccessed` method is functionally equivalent to using the negated matlab.mock.constraints.WasAccessed constraint with the assertThat method of the `Assertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assertNotAccessed method
testCase.assertNotAccessed(behavior.PropertyBar);

% Using the WasAccessed constraint with assertThat method
import matlab.mock.constraints.WasAccessed;
testCase.assertThat(behavior.PropertyBar,~WasAccessed);
```

However, there is more functionality when you use the `WasAccessed` constraint. For instance, you can specify a property was not accessed a certain number of times.

See Also

See Also

matlab.mock.constraints.WasAccessed

Introduced in R2017a

assertNotCalled

Class: matlab.mock.TestCase
Package: matlab.mock

Assert that a method was not called with certain input values

Syntax

```
assertNotCalled(testcase,behavior,diagnostic)
```

Description

`assertNotCalled(testcase,behavior,diagnostic)` asserts that a method was not called with certain input values.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `withExactInputs(myMockBehavior.myMockedMethod)`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assert Method Call

Assert a method was not called.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"foo");
mock.foo(123);
```

Test passing cases.

```
testCase.assertNotCalled(behavior.foo(456));
testCase.assertNotCalled(withExactInputs(behavior.foo));
```

Test failing cases.

```
testCase.assertNotCalled(behavior.foo(123));
testCase.assertNotCalled(behavior.foo(123), ...
    'Method foo should not have been called with input 123.');
```

Tips

Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assertNotCalled` method is functionally equivalent to using the negated matlab.mock.constraints.WasCalled constraint with the assertThat method of the `Assertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assertNotCalled method
testCase.assertNotCalled(behavior.foo(456), ...
    'Method foo should not have been called with input 456.')

% Using the WasCalled constraint with assertThat method
import matlab.mock.constraints.WasCalled;
testCase.assertThat(behavior.foo(456),~WasCalled, ...
    'Method foo should not have been called with input 456.')
```

However, there is more functionality when you use the `WasCalled` constraint. For instance, you can specify a method was not called a certain number of times.

See Also

See Also

matlab.mock.constraints.WasCalled

Introduced in R2017a

assertNotSet

Class: matlab.mock.TestCase
Package: matlab.mock

Assert that a property was not set

Syntax

```
assertNotSet(testcase,behavior,diagnostic)
```

Description

`assertNotSet(testcase,behavior,diagnostic)` asserts that a property was not set.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assert Property Set

Assert a property was not set.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
mock.PropertyFoo = 123;
```

Test passing cases.

```
testCase.assertNotSet(behavior.PropertyBar);
```

Test failing cases.

```
testCase.assertNotSet(behavior.PropertyFoo);
testCase.assertNotSet(behavior.PropertyFoo, ...
    'PropertyFoo should have been set.');
```

Tips

Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assertNotSet` method is functionally equivalent to using the negated matlab.mock.constraints.WasSet constraint with the assertThat method of the `Assertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assertNotSet method
testCase.assertNotSet(behavior.PropertyBar);

% Using the WasSet constraint with assertThat method
import matlab.mock.constraints.WasSet;
testCase.assertThat(behavior.PropertyBar,~WasSet);
```

However, there is more functionality when you use the `WasSet` constraint. For instance, you can specify a property was not set a certain number of times.

See Also

See Also

matlab.mock.constraints.WasSet

Introduced in R2017a

assignOutputsWhen

Class: matlab.mock.TestCase
Package: matlab.mock

Define return values for method call or property access

Syntax

```
assignOutputsWhen(testcase,behavior,A1,...,An)
```

Description

`assignOutputsWhen(testcase,behavior,A1,...,An)` defines values to return for a method called or property accessed.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance | `matlab.mock.PropertyGetBehavior` instance

Behavior of mock, specified as a `matlab.mock.MethodCallBehavior` or a `matlab.mock.PropertyGetBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object. To create an instance of `matlab.mock.PropertyGetBehavior`, call the `get` method on a property of the behavior object.

Example: `get(behavior.MyMockedProperty)`

Example: `withExactInputs(behavior.myMockedMethod)`

A1,...,An — Defined return values
scalar | vector | matrix | multidimensional array

Defined return values, specified as scalars, vectors, matrices, or multidimensional arrays. Return values can be any data type, and relate to the property or method specified by `behavior`.

Example: `"mySpecifiedValue"`

Example: `7,13,42`

Example: `[1 2 3;4 5 6]`

Examples

Assign Outputs

Assign outputs.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock, behavior] = testCase.createMock('AddedProperties',"PropertyFoo", ...
    'AddedMethods',"methodBar");
testCase.assignOutputsWhen(get(behavior.PropertyFoo), 'abc');
testCase.assignOutputsWhen(withExactInputs(behavior.methodBar), 1, 2, 3);

% Carry out actions
mock.PropertyFoo
[out1,out2,out3] = mock.methodBar
```

Alternatives

Using the `assignOutputsWhen` method is functionally equivalent to using the `matlab.mock.actions.AssignOutputs` action with the `when` method of the `MethodCallBehavior` or `PropertyGetBehavior` class. For example, the following code blocks are functionally equivalent.

```
% Using the assignOutputsWhen method
testCase.assignOutputsWhen(get(behavior.PropertyFoo),'abc');
testCase.assignOutputsWhen(withExactInputs(behavior.methodBar),1,2,3);

% Using the AssignOutputs action with the when function
```

```
import matlab.mock.actions.AssignOutputs;
when(get(behavior.PropertyFoo),AssignOutputs('abc'));
when(withExactInputs(behavior.methodBar),AssignOutputs(1,2,3));
```

However, there is more functionality when you use the `AssignOutputs` action. For instance, you can specify different subsequent behavior for the same mocked object interaction.

See Also

See Also

matlab.mock.actions.AssignOutputs

Introduced in R2017a

assumeAccessed

Class: matlab.mock.TestCase
Package: matlab.mock

Assume that a property was accessed

Syntax

```
assumeAccessed(testcase,behavior,diagnostic)
```

Description

`assumeAccessed(testcase,behavior,diagnostic)` assumes that a property was accessed.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assume Property Access

Assume a property was accessed.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
value = mock.PropertyFoo;
```

Test passing cases.

```
testCase.assumeAccessed(behavior.PropertyFoo);
testCase.assumeAccessed(behavior.PropertyFoo, ...
    'PropertyFoo should have been accessed.');
```

Test failing cases.

```
testCase.assumeAccessed(behavior.PropertyBar);
```

Tips

Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assumeAccessed` method is functionally equivalent to using the matlab.mock.constraints.WasAccessed constraint with the assumeThat method of the `Assumable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assumeAccessed method
testCase.assumeAccessed(behavior.PropertyFoo);

% Using the WasAccessed constraint with assumeThat method
import matlab.mock.constraints.WasAccessed;
testCase.assumeThat(behavior.PropertyFoo,WasAccessed);
```

However, there is more functionality when you use the `WasAccessed` constraint. For instance, you can specify a property was accessed a certain number of times.

See Also

See Also

matlab.mock.constraints.WasAccessed

Introduced in R2017a

assumeCalled

Class: matlab.mock.TestCase
Package: matlab.mock

Assume that a method was called with certain input values

Syntax

```
assumeCalled(testcase,behavior,diagnostic)
```

Description

`assumeCalled(testcase,behavior,diagnostic)` assumes that a method was called with certain input values.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `withExactInputs(myMockBehavior.myMockedMethod)`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assume Method Call

Assume a method was called.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',["foo","bar"]);
mock.foo(123);
```

Test passing cases.

```
testCase.assumeCalled(behavior.foo(123));
testCase.assumeCalled(behavior.foo(123), ...
    'Method foo should have been called with input 123.');
```

Test failing cases.

```
testCase.assumeCalled(behavior.foo(456));
testCase.assumeCalled(withExactInputs(behavior.bar));
```

Tips

Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assumeCalled` method is functionally equivalent to using the matlab.mock.constraints.WasCalled constraint with the assumeThat method of the `Assumable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assumeCalled method
testCase.assumeCalled(behavior.foo(123), ...
    'Method foo should have been called with input 123.')

% Using the WasCalled constraint with assumeThat method
import matlab.mock.constraints.WasCalled;
testCase.assumeThat(behavior.foo(123),WasCalled, ...
    'Method foo should have been called with input 123.');
```

However, there is more functionality when you use the `WasCalled` constraint. For instance, you can specify a method was called a certain number of times.

See Also

See Also

matlab.mock.constraints.WasCalled

Introduced in R2017a

assumeSet

Class: matlab.mock.TestCase
Package: matlab.mock

Assume that a property was set

Syntax

```
assumeSet(testcase,behavior,diagnostic)
```

Description

`assumeSet(testcase,behavior,diagnostic)` assumes that a property was set.

Input Arguments

`testcase` — Instance of test case

`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock

`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display

string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assume Property Set

Assume a property was set.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
mock.PropertyFoo = 123;
```

Test passing cases.

```
testCase.assumeSet(behavior.PropertyFoo);
testCase.assumeSet(behavior.PropertyFoo, 'PropertyFoo should have been set.');
```

Test failing cases.

```
testCase.assumeSet(behavior.PropertyBar);
```

Tips

Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assumeSet` method is functionally equivalent to using the matlab.mock.constraints.WasSet constraint with the assertThat method of the `Assumable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assertSet method
testCase.assertSet(behavior.PropertyFoo);

% Using the WasSet constraint with assertThat method
import matlab.mock.constraints.WasSet;
testCase.assertThat(behavior.PropertyFoo, WasSet);
```

However, there is more functionality when you use the `WasSet` constraint. For instance, you can specify a property was set a certain number of times.

See Also

See Also

matlab.mock.constraints.WasSet

Introduced in R2017a

assumeNotAccessed

Class: matlab.mock.TestCase
Package: matlab.mock

Assume that a property was not accessed

Syntax

```
assumeNotAccessed(testcase,behavior,diagnostic)
```

Description

`assumeNotAccessed(testcase,behavior,diagnostic)` assumes that a property was not accessed.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assume Property Access

Assume a property was not accessed.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',...
    ["PropertyFoo","PropertyBar"]);
value = mock.PropertyFoo;
```

Test passing cases.

```
testCase.assumeNotAccessed(behavior.PropertyBar);
```

Test failing cases.

```
testCase.assumeNotAccessed(behavior.PropertyFoo, ...
    'PropertyFoo should not have been accessed.');
```

Tips

Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assumeNotAccessed` method is functionally equivalent to using the negated matlab.mock.constraints.WasAccessed constraint with the assumeThat method of the `Assumable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assumeNotAccessed method
testCase.assumeNotAccessed(behavior.PropertyBar);

% Using the WasAccessed constraint with assumeThat method
import matlab.mock.constraints.WasAccessed;
testCase.assumeThat(behavior.PropertyBar,~WasAccessed);
```

However, there is more functionality when you use the `WasAccessed` constraint. For instance, you can specify a property was not accessed a certain number of times.

See Also

See Also

matlab.mock.constraints.WasAccessed

Introduced in R2017a

assumeNotCalled

Class: matlab.mock.TestCase
Package: matlab.mock

Assume that a method was not called with certain input values

Syntax

```
assumeNotCalled(testcase,behavior,diagnostic)
```

Description

`assumeNotCalled(testcase,behavior,diagnostic)` assumes that a method was not called with certain input values.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `withExactInputs(myMockBehavior.myMockedMethod)`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assume Method Call

Assume a method was not called.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"foo");
mock.foo(123);
```

Test passing cases.

```
testCase.assumeNotCalled(behavior.foo(456));
testCase.assumeNotCalled(withExactInputs(behavior.foo));
```

Test failing cases.

```
testCase.assumeNotCalled(behavior.foo(123));
testCase.assumeNotCalled(behavior.foo(123), ...
    'Method foo should not have been called with input 123.');
```

Tips

Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assumeNotCalled` method is functionally equivalent to using the negated matlab.mock.constraints.WasCalled constraint with the assumeThat method of the `Assumable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assumeNotCalled method
testCase.assumeNotCalled(behavior.foo(456), ...
    'Method foo should not have been called with input 456.')

% Using the WasCalled constraint with assumeThat method
import matlab.mock.constraints.WasCalled;
testCase.assumeThat(behavior.foo(456),~WasCalled, ...
    'Method foo should not have been called with input 456.')
```

However, there is more functionality when you use the `WasCalled` constraint. For instance, you can specify a method was not called a certain number of times.

See Also

See Also

matlab.mock.constraints.WasCalled

Introduced in R2017a

assumeNotSet

Class: matlab.mock.TestCase
Package: matlab.mock

Assume that a property was not set

Syntax

```
assumeNotSet(testcase,behavior,diagnostic)
```

Description

`assumeNotSet(testcase,behavior,diagnostic)` assumes that a property was not set.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Assume Property Set

Assume a property was not set.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
mock.PropertyFoo = 123;
```

Test passing cases.

```
testCase.assumeNotSet(behavior.PropertyBar);
```

Test failing cases.

```
testCase.assumeNotSet(behavior.PropertyFoo);
testCase.assumeNotSet(behavior.PropertyFoo,'PropertyFoo should have been set.');
```

Tips

Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `assumeNotSet` method is functionally equivalent to using the negated matlab.mock.constraints.WasSet constraint with the assumeThat method of the `Assumable` class. For example, the following code blocks are functionally equivalent.

```
% Using the assumeNotSet method
testCase.assumeNotSet(behavior.PropertyBar);

% Using the WasSet constraint with assumeThat method
import matlab.mock.constraints.WasSet;
testCase.assumeThat(behavior.PropertyBar,~WasSet);
```

However, there is more functionality when you use the `WasSet` constraint. For instance, you can specify a property was not set a certain number of times.

See Also

See Also

matlab.mock.constraints.WasSet

Introduced in R2017a

createMock

Class: matlab.mock.TestCase
Package: matlab.mock

Create mock object

Syntax

```
[mock,behavior] = createMock(testcase)
[mock,behavior] = createMock(testcase,superclass)
[mock,behavior] = createMock( ___ ,Name,Value)
```

Description

`[mock,behavior] = createMock(testcase)` creates a mock object and an associated behavior object.

`[mock,behavior] = createMock(testcase,superclass)` creates a mock that derives from the `superclass` class.

`[mock,behavior] = createMock( ___ ,Name,Value)` creates a mock with additional options specified by one or more `Name,Value` pair arguments. You can use this syntax with any of the arguments from the previous syntaxes.

Input Arguments

`testcase` — Instance of test case

`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`superclass` — Superclass for mock

scalar `meta.class` object

Superclass for mock, specified as a scalar `meta.class` object. The mock object implements all the abstract properties and methods of this class.

Example: `?MyIterfaceClass`

Example: `?MException`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

For example, `[mock,behavior] = testCase.createMock('AddedProperties', {'Prop1','Prop2'})` creates a mock and adds the `Prop1` and `Prop2` properties to it.

`'AddedMethods'` — Names of methods to add to mock
string array | cell array of character vectors

Names of methods to add to the mock, specified as a string array or a cell array of character vectors. Unless the mock is strict or the mock behavior has been defined, calling these methods on the mock returns an empty array.

Example: `["methodA","methodB","methodC"]`

Example: `{'method1','method2'}`

`'AddedProperties'` — Properties to add to mock
string array | cell array of character vectors

Names of properties to add to the mock, specified as a string array or a cell array of character vectors. If a mock is not strict, you can set and get their values. However, if a mock is strict, by default MATLAB produces an assertion failure if you set or get a property value.

Example: `"MyProperty"`

Example: `{'Prop1','Prop2'}`

`'Strict'` — Indicator if mock is strict
`false` (default) | `true`

Indicator if mock is strict, specified as `false` or `true`. By default, a mock method returns an empty array if the behavior is undefined. If you set `Strict` to `true`, the framework produces an assertion failure for undefined behavior for

- All `abstract` methods and properties of the specified interface.
- Methods added to the mock with the `AddedMethods` argument.
- Properties added to the mock with the `AddedProperties` argument.

Data Types: `logical`

`'ConstructorInputs'` — Inputs to pass to `superclass` constructor
cell array of values

Inputs to pass to the `superclass` constructor, specified as a cell array of values.

Example: If you construct a mock where you define `superclass` to be `?MException`, `'ConstructorInputs'` could be `{'My:ID','My message'}`.

Output Arguments

`mock` — Implementation of abstract methods and properties
mock object

Implementation of the abstract methods and properties of the interface specified by the `superclass` input, returned as a mock object. If a mock is constructed without defining a superclass, it does not have an explicit interface.

`behavior` — Definition of mock behavior
behavior object

Definition of the mock behavior, returned as a behavior object. Use `behavior` to define mock actions and verify interactions.

Examples

Construct Mocks

Construct a strict mock.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock, behavior] = testCase.createMock('AddedMethods',"foo",'Strict',true);
```

Construct a mock with specific methods.

```
[mock,behavior] = testCase.createMock('AddedMethods', ...
    {'one', 'two', 'three'});
```

Construct a mock providing constructor inputs.

```
[mock,behavior] = testCase.createMock(?MException,'ConstructorInputs', ...
    {'My:ID','My message'});
```

See Also

Introduced in R2017a

fatalAssertAccessed

Class: matlab.mock.TestCase
Package: matlab.mock

Fatally assert that a property was accessed

Syntax

```
fatalAssertAccessed(testcase,behavior,diagnostic)
```

Description

`fatalAssertAccessed(testcase,behavior,diagnostic)` fatally asserts that a property was accessed.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Fatally Assert Property Access

Fatally assert a property was accessed.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
value = mock.PropertyFoo;
```

Test passing cases.

```
testCase.fatalAssertAccessed(behavior.PropertyFoo);
testCase.fatalAssertAccessed(behavior.PropertyFoo, ...
    'PropertyFoo should have been accessed.');
```

Test failing cases.

```
testCase.fatalAssertAccessed(behavior.PropertyBar);
```

Tips

Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit

from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

Alternatives

Using the `fatalAssertAccessed` method is functionally equivalent to using the matlab.mock.constraints.WasAccessed constraint with the fatalAssertThat method of the `FatalAssertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the fatalAssertAccessed method
testCase.fatalAssertAccessed(behavior.PropertyFoo);
```

```
% Using the WasAccessed constraint with fatalAssertThat method
import matlab.mock.constraints.WasAccessed;
testCase.fatalAssertThat(behavior.PropertyFoo,WasAccessed);
```

However, there is more functionality when you use the `WasAccessed` constraint. For instance, you can specify a property was accessed a certain number of times.

See Also

See Also

matlab.mock.constraints.WasAccessed

Introduced in R2017a

fatalAssertCalled

Class: matlab.mock.TestCase
Package: matlab.mock

Fatally assert that a method was called with certain input values

Syntax

```
fatalAssertCalled(testcase,behavior,diagnostic)
```

Description

`fatalAssertCalled(testcase,behavior,diagnostic)` fatally asserts that a method was called with certain input values.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `withExactInputs(myMockBehavior.myMockedMethod)`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Fatally Assert Method Call

Fatally assert a method was called.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',["foo","bar"]);
mock.foo(123);
```

Test passing cases.

```
testCase.fatalAssertCalled(behavior.foo(123));
testCase.fatalAssertCalled(behavior.foo(123), ...
    'Method foo should have been called with input 123.');
```

Test failing cases.

```
testCase.fatalAssertCalled(behavior.foo(456));
testCase.fatalAssertCalled(withExactInputs(behavior.bar));
```

Tips

Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit

from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

Alternatives

Using the `fatalAssertCalled` method is functionally equivalent to using the matlab.mock.constraints.WasCalled constraint with the fatalAssertThat method of the `FatalAssertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the fatalAssertCalled method
testCase.fatalAssertCalled(behavior.foo(123), ...
    'Method foo should have been called with input 123.')

% Using the WasCalled constraint with fatalAssertThat method
import matlab.mock.constraints.WasCalled;
testCase.fatalAssertThat(behavior.foo(123),WasCalled, ...
    'Method foo should have been called with input 123.');
```

However, there is more functionality when you use the `WasCalled` constraint. For instance, you can specify a method was called a certain number of times.

See Also

See Also

matlab.mock.constraints.WasCalled

Introduced in R2017a

fatalAssertSet

Class: matlab.mock.TestCase
Package: matlab.mock

Fatally assert that a property was set

Syntax

```
fatalAssertSet(testcase,behavior,diagnostic)
```

Description

`fatalAssertSet(testcase,behavior,diagnostic)` fatally asserts that a property was set.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Fatally Assert Property Set

Fatally assert a property was set.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
mock.PropertyFoo = 123;
```

Test passing cases.

```
testCase.fatalAssertSet(behavior.PropertyFoo);
testCase.fatalAssertSet(behavior.PropertyFoo, ...
    'PropertyFoo should have been set.');
```

Test failing cases.

```
testCase.fatalAssertSet(behavior.PropertyBar);
```

Tips

Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit

from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

Alternatives

Using the `fatalAssertSet` method is functionally equivalent to using the matlab.mock.constraints.WasSet constraint with the fatalAssertThat method of the `FatalAssertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the fatalAssertSet method
testCase.fatalAssertSet(behavior.PropertyFoo);
```

```
% Using the WasSet constraint with fatalAssertThat method
import matlab.mock.constraints.WasSet;
testCase.fatalAssertThat(behavior.PropertyFoo, WasSet);
```

However, there is more functionality when you use the `WasSet` constraint. For instance, you can specify a property was set a certain number of times.

See Also

See Also

matlab.mock.constraints.WasSet

Introduced in R2017a

fatalAssertNotAccessed

Class: matlab.mock.TestCase
Package: matlab.mock

Fatally assert that a property was not accessed

Syntax

```
fatalAssertNotAccessed(testcase,behavior,diagnostic)
```

Description

`fatalAssertNotAccessed(testcase,behavior,diagnostic)` fatally asserts that a property was not accessed.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Fatally Assert Property Access

Fatally assert a property was not accessed.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',...
    ["PropertyFoo","PropertyBar"]);
value = mock.PropertyFoo;
```

Test passing cases.

```
testCase.fatalAssertNotAccessed(behavior.PropertyBar);
```

Test failing cases.

```
testCase.fatalAssertNotAccessed(behavior.PropertyFoo, ...
    'PropertyFoo should not have been accessed.');
```

Tips

Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

Alternatives

Using the `fatalAssertNotAccessed` method is functionally equivalent to using the negated matlab.mock.constraints.WasAccessed constraint with the fatalAssertThat method of the `FatalAssertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the fatalAssertNotAccessed method
testCase.fatalAssertNotAccessed(behavior.PropertyBar);

% Using the WasAccessed constraint with fatalAssertThat method
import matlab.mock.constraints.WasAccessed;
testCase.fatalAssertThat(behavior.PropertyBar,~WasAccessed);
```

However, there is more functionality when you use the `WasAccessed` constraint. For instance, you can specify a property was not accessed a certain number of times.

See Also

See Also

matlab.mock.constraints.WasAccessed

Introduced in R2017a

fatalAssertNotCalled

Class: matlab.mock.TestCase
Package: matlab.mock

Fatally assert that a method was not called with certain input values

Syntax

```
fatalAssertNotCalled(testcase,behavior,diagnostic)
```

Description

`fatalAssertNotCalled(testcase,behavior,diagnostic)` fatally asserts that a method was not called with certain input values.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `withExactInputs(myMockBehavior.myMockedMethod)`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Fatally Assert Method Call

Fatally assert a method was not called.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"foo");
mock.foo(123);
```

Test passing cases.

```
testCase.fatalAssertNotCalled(behavior.foo(456));
testCase.fatalAssertNotCalled(withExactInputs(behavior.foo));
```

Test failing cases.

```
testCase.fatalAssertNotCalled(behavior.foo(123));
testCase.fatalAssertNotCalled(behavior.foo(123), ...
    'Method foo should not have been called with input 123.');
```

Tips

Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit

from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

Alternatives

Using the `fatalAssertNotCalled` method is functionally equivalent to using the negated matlab.mock.constraints.WasCalled constraint with the fatalAssertThat method of the `FatalAssertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the fatalAssertNotCalled method
testCase.fatalAssertNotCalled(behavior.foo(456), ...
    'Method foo should not have been called with input 456.')

% Using the WasCalled constraint with fatalAssertThat method
import matlab.mock.constraints.WasCalled;
testCase.fatalAssertThat(behavior.foo(456),~WasCalled, ...
    'Method foo should not have been called with input 456.')
```

However, there is more functionality when you use the `WasCalled` constraint. For instance, you can specify a method was not called a certain number of times.

See Also

See Also

matlab.mock.constraints.WasCalled

Introduced in R2017a

fatalAssertNotSet

Class: matlab.mock.TestCase
Package: matlab.mock

Fatally assert that a property was not set

Syntax

```
fatalAssertNotSet(testcase,behavior,diagnostic)
```

Description

`fatalAssertNotSet(testcase,behavior,diagnostic)` fatally asserts that a property was not set.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Fatally Assert Property Set

Fatally assert a property was not set.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
mock.PropertyFoo = 123;
```

Test passing cases.

```
testCase.fatalAssertNotSet(behavior.PropertyBar);
```

Test failing cases.

```
testCase.fatalAssertNotSet(behavior.PropertyFoo);
testCase.fatalAssertNotSet(behavior.PropertyFoo, ...
    'PropertyFoo should have been set.');
```

Tips

Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit

from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

Alternatives

Using the `fatalAssertNotSet` method is functionally equivalent to using the negated matlab.mock.constraints.WasSet constraint with the fatalAssertThat method of the `FatalAssertable` class. For example, the following code blocks are functionally equivalent.

```
% Using the fatalAssertNotSet method
testCase.fatalAssertNotSet(behavior.PropertyBar);

% Using the WasSet constraint with fatalAssertThat method
import matlab.mock.constraints.WasSet;
testCase.fatalAssertThat(behavior.PropertyBar,~WasSet);
```

However, there is more functionality when you use the `WasSet` constraint. For instance, you can specify a property was not set a certain number of times.

See Also

See Also

matlab.mock.constraints.WasSet

Introduced in R2017a

matlab.mock.TestCase.forInteractiveUse

Class: matlab.mock.TestCase
Package: matlab.mock

Create `TestCase` for interactive use

Syntax

```
tc = matlab.mock.TestCase.forInteractiveUse
```

Description

`tc = matlab.mock.TestCase.forInteractiveUse` creates a `matlab.mock.TestCase` instance for interactive use. The `TestCase` is configured so you can experiment with it at the MATLAB command prompt. The `TestCase` reacts to qualification failures and successes by displaying messages to the screen for both passing and failing conditions.

Examples

Construct Interactive TestCase

Create a TestCase configured for interactive use at the MATLAB command prompt.

```
import matlab.mock.TestCase;
testCase = TestCase.forInteractiveUse;
```

Create a mock.

```
[mock,behavior] = testCase.createMock('AddedMethods',"myMethod");
```

Produce a failing verification.

```
testCase.verifyCalled(behavior.myMethod(123));
```

See Also

Introduced in R2017a

returnStoredValueWhen

Class: matlab.mock.TestCase
Package: matlab.mock

Return stored property value

Syntax

```
returnStoredValueWhen(testcase,behavior)
```

Description

`returnStoredValueWhen(testcase,behavior)` specifies that the mock returns the stored property value when a property is accessed. If the mock is strict and the property is an abstract property of the mock interface, the framework produces an assertion failure when it accesses a property. To enable access to the property in a strict mock, use the `returnStoredValueWhen` method.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyGetBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyGetBehavior` instance. To create an instance of `matlab.mock.PropertyGetBehavior`, call the `get` method on a property of the behavior object.

Example: `get(behavior.MyMockedProperty)`

Examples

Return Property Value

Create a strict mock. All property interactions throw exceptions by default.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"PropertyFoo",...
    'Strict',true);
```

Enable `PropertyFoo` to be accessed instead of throwing an exception.

```
testCase.returnStoredValueWhen(get(behavior.PropertyFoo));
```

Alternatives

Using the `returnStoredValueWhen` method is functionally equivalent to using the `matlab.mock.actions.ReturnStoredValue` action with the `when` method of the `PropertyGetBehavior` class. For example, the following code blocks are functionally equivalent.

```
% Using the returnStoredValueWhen method
testCase.returnStoredValueWhen(get(behavior.PropertyFoo));
```

```
% Using the ReturnStoredValue action with the when function
import matlab.mock.actions.ReturnStoredValue;
when(get(behavior.PropertyFoo),ReturnStoredValue);
```

However, there is more functionality when you use the `ReturnStoredValue` action. For instance, you can specify different subsequent behavior for the same mocked object interaction.

See Also

See Also

matlab.mock.actions.ReturnStoredValue

Introduced in R2017a

storeValueWhen

Class: matlab.mock.TestCase
Package: matlab.mock

Store property value

Syntax

```
storeValueWhen(testcase,behavior)
```

Description

`storeValueWhen(testcase,behavior)` specifies that the mock should store the property value when a property is set. If the mock is strict and the property is an abstract property of the mock interface, the framework produces an assertion failure at property set access. To enable the property to be set in a strict mock, use the `storeValueWhen` method.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertySetBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertySetBehavior` instance. To create an instance of `matlab.mock.PropertySetBehavior`, call the `set` method on a property of the behavior object.

Example: `set(behavior.MyMockedProperty)`

Examples

Store Property Value

Create a strict mock. All property interactions throw exceptions by default.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"PropertyFoo", ...
    'Strict',true);
```

Enable `PropertyFoo` to be set instead of throwing an exception.

```
testCase.storeValueWhen(set(behavior.PropertyFoo));
```

Alternatives

Using the `storeValueWhen` method is functionally equivalent to using the `matlab.mock.actions.StoreValue` action with the `when` method of the `PropertySetBehavior` class. For example, the following code blocks are functionally equivalent.

```
% Using the storeValueWhen method
testCase.storeValueWhen(set(behavior.PropertyFoo));
```

```
% Using the StoreValue action with the when function
import matlab.mock.actions.StoreValue;
when(set(behavior.PropertyFoo),StoreValue);
```

However, there is more functionality when you use the `StoreValue` action. For instance, you can specify different subsequent behavior for the same mocked object interaction.

See Also

See Also

matlab.mock.actions.StoreValue

Introduced in R2017a

throwExceptionWhen

Class: matlab.mock.TestCase
Package: matlab.mock

Throw exception for method call or property interaction

Syntax

```
throwExceptionWhen(testcase,behavior)
throwExceptionWhen(testcase,behavior,exception)
```

Description

`throwExceptionWhen(testcase,behavior)` specifies that the mock should throw an exception when a method is called or a property is accessed or set.

`throwExceptionWhen(testcase,behavior,exception)` specifies the exception that the mock throws.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance |
`matlab.mock.PropertyGetBehavior` instance |
`matlab.mock.PropertySetBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior`, `matlab.mock.PropertyGetBehavior`, or `matlab.mock.PropertySetBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object. To create an instance of `matlab.mock.PropertyGetBehavior`,

call the `get` method on a property of the behavior object. To create an instance of `matlab.mock.PropertySetBehavior`, call the `set` method on a property of the behavior object.

Example: `withExactInputs(behavior.myMockedMethod)`

Example: `get(behavior.MyMockedProperty)`

Example: `set(behavior.MyMockedProperty)`

`exception` — Exception to throw at method call or property interaction
scalar `MException` object

Exception for the framework to throw at the method call or property interaction, specified as a scalar `MException` object.

Example: `MException('MyProduct:myID','My exception message.')`

Examples

Throw Exception

Throw an exception when a method is called or when a property is accessed or set.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',"PropertyFoo", ...
    'AddedMethods',"methodBar");
testCase.throwExceptionWhen(get(behavior.PropertyFoo));
testCase.throwExceptionWhen(set(behavior.PropertyFoo), ...
    MException('PropertyFoo:set', 'Do not change PropertyFoo'));
testCase.throwExceptionWhen(withAnyInputs(behavior.methodBar));

% Carry out actions
mock.PropertyFoo
mock.PropertyFoo = 123;
mock.methodBar;
```

Alternatives

Using the `throwExceptionWhen` method is functionally equivalent to using the `matlab.mock.actions.ThrowException` action with the `when` method of the

`MethodCallBehavior`, `PropertyGetBehavior`, or `PropertySetBehavior` class. For example, the following code blocks are functionally equivalent.

```
% Using the throwExceptionWhen method
testCase.throwExceptionWhen(behavior.deposit(IsLessThan(0)), ...
    MException('Account:deposit:Negative', ...
    'Deposit amount must be positive.'));

% Using the ThrowException action with the when function
import matlab.mock.actions.ThrowException
when(behavior.deposit(IsLessThan(0)),ThrowException( ...
    MException('Account:deposit:Negative', ...
    'Deposit amount must be positive.')))
```

However, there is more functionality when you use the `ThrowException` action. For instance, you can specify different subsequent behavior for the same mocked object interaction.

See Also

See Also

matlab.mock.actions.ThrowException

Introduced in R2017a

verifyAccessed

Class: matlab.mock.TestCase
Package: matlab.mock

Verify that a property was accessed

Syntax

```
verifyAccessed(testcase,behavior,diagnostic)
```

Description

`verifyAccessed(testcase,behavior,diagnostic)` verifies that a property was accessed.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Verify Property Access

Verify a property was accessed.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
value = mock.PropertyFoo;
```

Test passing cases.

```
testCase.verifyAccessed(behavior.PropertyFoo);
testCase.verifyAccessed(behavior.PropertyFoo, ...
    'PropertyFoo should have been accessed.');
```

Test failing cases.

```
testCase.verifyAccessed(behavior.PropertyBar);
```

Tips

Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `verifyAccessed` method is functionally equivalent to using the matlab.mock.constraints.WasAccessed constraint with the verifyThat method of the `Verifiable` class. For example, the following code blocks are functionally equivalent.

```
% Using the verifyAccessed method
testCase.verifyAccessed(behavior.PropertyFoo);

% Using the WasAccessed constraint with verifyThat method
import matlab.mock.constraints.WasAccessed;
testCase.verifyThat(behavior.PropertyFoo,WasAccessed);
```

However, there is more functionality when you use the `WasAccessed` constraint. For instance, you can specify a property was accessed a certain number of times.

See Also

See Also

matlab.mock.constraints.WasAccessed

Introduced in R2017a

verifyCalled

Class: matlab.mock.TestCase
Package: matlab.mock

Verify that a method was called with certain input values

Syntax

```
verifyCalled(testcase,behavior,diagnostic)
```

Description

`verifyCalled(testcase,behavior,diagnostic)` verifies that a method was called with certain input values.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `withExactInputs(myMockBehavior.myMockedMethod)`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Verify Method Call

Verify a method was called.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',["foo","bar"]);
mock.foo(123);
```

Test passing cases.

```
testCase.verifyCalled(behavior.foo(123));
testCase.verifyCalled(behavior.foo(123), ...
    'Method foo should have been called with input 123.');
```

Test failing cases.

```
testCase.verifyCalled(behavior.foo(456));
testCase.verifyCalled(withExactInputs(behavior.bar));
```

Tips

Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `verifyCalled` method is functionally equivalent to using the matlab.mock.constraints.WasCalled constraint with the verifyThat method of the `Verifiable` class. For example, the following code blocks are functionally equivalent.

```
% Using the verifyCalled method
testCase.verifyCalled(behavior.foo(123), ...
    'Method foo should have been called with input 123.')

% Using the WasCalled constraint with verifyThat method
import matlab.mock.constraints.WasCalled;
testCase.verifyThat(behavior.foo(123),WasCalled, ...
    'Method foo should have been called with input 123.');
```

However, there is more functionality when you use the `WasCalled` constraint. For instance, you can specify a method was called a certain number of times.

See Also

See Also

matlab.mock.constraints.WasCalled

Introduced in R2017a

verifySet

Class: matlab.mock.TestCase
Package: matlab.mock

Verify that a property was set

Syntax

```
verifySet(testcase,behavior,diagnostic)
```

Description

`verifySet(testcase,behavior,diagnostic)` verifies that a property was set.

Input Arguments

`testcase` — Instance of test case

`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock

`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display

string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Verify Property Set

Verify a property was set.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
mock.PropertyFoo = 123;
```

Test passing cases.

```
testCase.verifySet(behavior.PropertyFoo);
testCase.verifySet(behavior.PropertyFoo, ...
    'PropertyFoo should have been set.');
```

Test failing cases.

```
testCase.verifySet(behavior.PropertyBar);
```

Tips

Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `verifySet` method is functionally equivalent to using the matlab.mock.constraints.WasSet constraint with the verifyThat method of the `Verifiable` class. For example, the following code blocks are functionally equivalent.

```
% Using the verifySet method
testCase.verifySet(behavior.PropertyFoo);

% Using the WasSet constraint with verifyThat method
import matlab.mock.constraints.WasSet;
testCase.verifyThat(behavior.PropertyFoo, WasSet);
```

However, there is more functionality when you use the `WasSet` constraint. For instance, you can specify a property was set a certain number of times.

See Also

See Also

matlab.mock.constraints.WasSet

Introduced in R2017a

verifyNotAccessed

Class: matlab.mock.TestCase
Package: matlab.mock

Verify that a property was not accessed

Syntax

```
verifyNotAccessed(testcase,behavior,diagnostic)
```

Description

`verifyNotAccessed(testcase,behavior,diagnostic)` verifies that a property was not accessed.

Input Arguments

`testcase` — Instance of test case

`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock

`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display

string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Verify Property Access

Verify a property was not accessed.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties',...
    ["PropertyFoo","PropertyBar"]);
value = mock.PropertyFoo;
```

Test passing cases.

```
testCase.verifyNotAccessed(behavior.PropertyBar);
```

Test failing cases.

```
testCase.verifyNotAccessed(behavior.PropertyFoo, ...
    'PropertyFoo should not have been accessed.');
```

Tips

Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `verifyNotAccessed` method is functionally equivalent to using the negated matlab.mock.constraints.WasAccessed constraint with the verifyThat method of the `Verifiable` class. For example, the following code blocks are functionally equivalent.

```
% Using the verifyNotAccessed method
testCase.verifyNotAccessed(behavior.PropertyBar);

% Using the WasAccessed constraint with verifyThat method
import matlab.mock.constraints.WasAccessed;
testCase.verifyThat(behavior.PropertyBar,~WasAccessed);
```

However, there is more functionality when you use the `WasAccessed` constraint. For instance, you can specify a property was not accessed a certain number of times.

See Also

See Also

matlab.mock.constraints.WasAccessed

Introduced in R2017a

verifyNotCalled

Class: matlab.mock.TestCase
Package: matlab.mock

Verify that a method was not called with certain input values

Syntax

```
verifyNotCalled(testcase,behavior,diagnostic)
```

Description

`verifyNotCalled(testcase,behavior,diagnostic)` verifies that a method was not called with certain input values.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.MethodCallBehavior` instance

Behavior of the mock, specified as a `matlab.mock.MethodCallBehavior` instance. To create an instance of `matlab.mock.MethodCallBehavior`, call a method of the behavior object.

Example: `withExactInputs(myMockBehavior.myMockedMethod)`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Verify Method Call

Verify a method was not called.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedMethods',"foo");
mock.foo(123);
```

Test passing cases.

```
testCase.verifyNotCalled(behavior.foo(456));
testCase.verifyNotCalled(withExactInputs(behavior.foo));
```

Test failing cases.

```
testCase.verifyNotCalled(behavior.foo(123));
testCase.verifyNotCalled(behavior.foo(123), ...
    'Method foo should not have been called with input 123.');
```

Tips

Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `verifyNotCalled` method is functionally equivalent to using the negated matlab.mock.constraints.WasCalled constraint with the verifyThat method of the `Verifiable` class. For example, the following code blocks are functionally equivalent.

```
% Using the verifyNotCalled method
testCase.verifyNotCalled(behavior.foo(456), ...
    'Method foo should not have been called with input 456.')

% Using the WasCalled constraint with verifyThat method
import matlab.mock.constraints.WasCalled;
testCase.verifyThat(behavior.foo(456),~WasCalled, ...
    'Method foo should not have been called with input 456.')
```

However, there is more functionality when you use the `WasCalled` constraint. For instance, you can specify a method was not called a certain number of times.

See Also

See Also

matlab.mock.constraints.WasCalled

Introduced in R2017a

verifyNotSet

Class: matlab.mock.TestCase
Package: matlab.mock

Verify that a property was not set

Syntax

```
verifyNotSet(testcase,behavior,diagnostic)
```

Description

`verifyNotSet(testcase,behavior,diagnostic)` verifies that a property was not set.

Input Arguments

`testcase` — Instance of test case
`matlab.mock.TestCase` object

Instance of the test case, specified as a `matlab.mock.TestCase` object.

`behavior` — Behavior of mock
`matlab.mock.PropertyBehavior` instance

Behavior of the mock, specified as a `matlab.mock.PropertyBehavior` instance. To create an instance of `matlab.mock.PropertyBehavior`, access a property of the behavior object.

Example: `behavior.PropertyFoo`

`diagnostic` — Diagnostic information to display
string array | character array | function handle | `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic information to display, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` object. Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Example: `"My diagnostic message."`

Example: `@() datetime('now')`

Examples

Verify Property Set

Verify a property was not set.

```
testCase = matlab.mock.TestCase.forInteractiveUse;
[mock,behavior] = testCase.createMock('AddedProperties', ...
    ["PropertyFoo","PropertyBar"]);
mock.PropertyFoo = 123;
```

Test passing cases.

```
testCase.verifyNotSet(behavior.PropertyBar);
```

Test failing cases.

```
testCase.verifyNotSet(behavior.PropertyFoo);
testCase.verifyNotSet(behavior.PropertyFoo, ...
    'PropertyFoo should have been set.');
```

Tips

Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualifications for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point marks the current test method as failed and incomplete.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

Alternatives

Using the `verifyNotSet` method is functionally equivalent to using the negated matlab.mock.constraints.WasSet constraint with the verifyThat method of the `Verifiable` class. For example, the following code blocks are functionally equivalent.

```
% Using the verifyNotSet method
testCase.verifyNotSet(behavior.PropertyBar);

% Using the WasSet constraint with verifyThat method
import matlab.mock.constraints.WasSet;
testCase.verifyThat(behavior.PropertyBar,~WasSet);
```

However, there is more functionality when you use the `WasSet` constraint. For instance, you can specify a property was not set a certain number of times.

See Also

See Also

matlab.mock.constraints.WasSet

Introduced in R2017a

matlabrc

Start up file for MATLAB program

Description

At startup time, MATLAB automatically executes the file `matlabrc.m`. This function establishes the MATLAB path, sets the default figure size, and sets some uicontrol defaults.

On multiuser or networked systems, system administrators can put messages, definitions, or other code that applies to all users in their `matlabrc.m` file.

For individual systems, use the `startup.m` file to customize MATLAB startup. The `matlabrc.m` file, located in the *`matlabroot`*`/toolbox/local` folder, is reserved for system administrators.

Examples

Turn Off Figure Window Toolbar

If you do not want the toolbar to appear in the figure window, remove the comment marks from the following line in the `matlabrc.m` file. Alternatively, create a similar line in your own `startup.m` file.

```
%   set(0,'defaultfiguretoolbar','none')
```

Tips

You can also start MATLAB using options you define at the command prompt or in your Microsoft Windows shortcut for MATLAB.

Algorithms

MATLAB invokes `matlabrc` at startup. `matlabrc.m` contains the statements

```
if exist('startup') == 2
    startup
end
```

that invokes `startup.m`, if it exists. Extend this process to create additional startup files, if necessary.

See Also

`matlabroot` | `quit` | `restoredefaultpath` | `startup`

Topics

Startup Options
"MATLAB Startup Folder"

matlabroot

Root folder

Syntax

```
matlabroot
mr = matlabroot
```

Description

`matlabroot` returns the name of the folder where the MATLAB software is installed. Use `matlabroot` to create a path to MATLAB and toolbox folders that does not depend on a specific platform, MATLAB version, or installation location.

`mr = matlabroot` returns the name of the folder in which the MATLAB software is installed and assigns it to `mr`.

Examples

Get the location where MATLAB is installed:

```
matlabroot
```

MATLAB returns:

```
C:\Program Files\MATLAB\R2009a
```

Produce a full path to the `toolbox/matlab/general` folder that is correct for the platform on which it is executed:

```
fullfile(matlabroot,'toolbox','matlab','general')
```

Change the current folder to the MATLAB root folder:

```
cd(matlabroot)
```

To add the folder `myfiles` to the MATLAB search path, run

```
addpath([matlabroot '/toolbox/local/myfiles'])
```

Tips

matlabroot as Folder Name

The term *matlabroot* also refers to the folder where MATLAB files are installed. For example, "save to *matlabroot*/toolbox/local" means save to the toolbox/local folder in the MATLAB root folder.

Using $matlabroot as a Literal

In some files, $matlabroot is literal. In those files, MATLAB interprets $matlabroot as the full path to the MATLAB root folder. For example, including the line:

```
$matlabroot/toolbox/local/myfile.jar
```

in javaclasspath.txt, adds myfile.jar, which is located in the toolbox/local folder, to the static Java class path.

Sometimes, particularly in older code examples, the term $matlabroot or $MATLABROOT is not meant to be interpreted literally but is used to represent the value returned by the matlabroot function.

matlabroot on Macintosh Platforms

In R2008b (V7.7) and more recent versions, running matlabroot on Apple Macintosh platforms returns

```
/Applications/MATLAB_R2008b.app
```

In versions prior to R2008b (V7.7), such as R2008a (V7.6), running matlabroot on Macintosh platforms returns, for example

```
/Applications/MATLAB_R2008a
```

When you use GUIs on Macintosh platforms, you cannot directly view the contents of the MATLAB root folder. For more information, see "Navigating Within the MATLAB Root Folder on Macintosh Platforms".

See Also

`fullfile` | `path` | `toolboxdir`

Introduced before R2006a

matlabshared.supportpkg.checkForUpdate

List of support packages that can be updated (Not recommended)

Compatibility

`checkForUpdate` will be removed in a future release. To check for updates to support packages, on the MATLAB **Home** tab, in the **Environment** section, click **Add-Ons** > **Check for Updates** > **Hardware Support Packages**.

Syntax

```
matlabshared.supportpkg.checkForUpdate
info = matlabshared.supportpkg.checkForUpdate
```

Description

`matlabshared.supportpkg.checkForUpdate` displays information about support package updates in the MATLAB Command Window. If an update is available, use `supportPackageInstaller` to install the updates.

`info = matlabshared.supportpkg.checkForUpdate` returns a structured array of information about installed support packages.

Examples

Check for support package updates

```
matlabshared.supportpkg.checkForUpdate
```

```
No support packages need updates.
```

If one or more updates are available, the command line displays that information in the response.

Get a structured array of support package updates

```
info = matlabshared.supportpkg.checkForUpdate
```

```
info =

                Name: 'Arduino'
    InstalledVersion: '3.0'
         BaseProduct: 'Simulink'
```

Output Arguments

`info` — Return argument from function
structure created using `matlabshared.supportpkg.checkForUpdate`

Information about support package updates, returned as a structured array.

See Also

See Also

`matlabshared.supportpkg.getInstalled` | `supportPackageInstaller` | `targetupdater`

Introduced in R2014b

matlabshared.supportpkg.getInstalled

List of installed support packages

Syntax

```
matlabshared.supportpkg.getInstalled
info = matlabshared.supportpkg.getInstalled
```

Description

`matlabshared.supportpkg.getInstalled` displays information about installed support packages in the MATLAB Command Window.

`info = matlabshared.supportpkg.getInstalled` returns a structured array of information about installed support packages.

Examples

Get a list of installed support packages

```
matlabshared.supportpkg.getInstalled
```

```
Name   Version Base Product
------- ------- ------------
Arduino 3.0     Simulink
```

Get a structured array of installed support packages

```
info = matlabshared.supportpkg.getInstalled
```

```
info =

                Name: 'Arduino'
    InstalledVersion: '3.0'
```

```
        BaseProduct: 'Simulink'
```

Output Arguments

`info` — Return argument from function
structure created using `matlabshared.supportpkg.getInstalled`

Information about installed support packages, returned as a structured array.

See Also

See Also

`matlabshared.supportpkg.checkForUpdate` | `supportPackageInstaller` | `targetupdater`

Introduced in R2014b

matlabshared.supportpkg.getSupportPackageRoot

Get root folder of support packages

Syntax

```
installDir = matlabshared.supportpkg.getSupportPackageRoot
```

Description

`installDir = matlabshared.supportpkg.getSupportPackageRoot` gets root folder of the current support packages. Support Package Installer installs all support packages to this location.

Examples

Set and Get Custom Support Package Root

Use the `setSupportPackageRoot` function to change the installation folder for support packages. You need administrative privileges to use this function.

```
matlabshared.supportpkg.setSupportPackageRoot('C:\MATLAB\CustomSupportPackageRoot')
```

Use `getSupportPackageRoot` to check that the change was successful.

```
matlabshared.supportpkg.getSupportPackageRoot
```

```
ans =

C:\MATLAB\CustomSupportPackageRoot
```

Output Arguments

`installDir` — Root folder of support packages
string

Root folder of support packages, returned as a string. By default, the directory is set to:

- Windows – `'C:\MATLAB\SupportPackage\release'`
- For Unix – `'/home/user/Documents/MATLAB/SupportPackages/release'`

Here, *`release`* is your specific MATLAB release and *`user`* is your Unix user name. If the default location exists and is not empty, the location becomes *`release_num`*.

Example: `'C:\MATLAB\SupportPackage\R2016a'`

Data Types: `char`

See Also

See Also

`matlabshared.supportpkg.setSupportPackageRoot`

Topics

"Support Package Installation"

Introduced in R2016a

matlabshared.supportpkg.setSupportPackageRoot

Set root folder of support packages

Syntax

```
matlabshared.supportpkg.setSupportPackageRoot(installDir)
```

Description

`matlabshared.supportpkg.setSupportPackageRoot(installDir)` sets the root folder of the current support packages. Support Package Installer installs all support packages to this location.

You must have administrative privileges on the folder that you set the root to. You must also have administrative privileges to modify `matlabroot`, because the root folder of the support package is recorded under `matlabroot`.

When you change the root folder, support packages installed in the new location become available on the MATLAB path. Any previously installed support packages are removed from the MATLAB path, but the files are still available.

Examples

Set and Get Custom Support Package Root

Use the `setSupportPackageRoot` function to change the installation folder for support packages. You need administrative privileges to use this function.

```
matlabshared.supportpkg.setSupportPackageRoot('C:\MATLAB\CustomSupportPackageRoot')
```

Use `getSupportPackageRoot` to check that the change was successful.

```
matlabshared.supportpkg.getSupportPackageRoot
```

```
ans =
```

```
C:\MATLAB\CustomSupportPackageRoot
```

Input Arguments

`installDir` — Root folder of support packages
string

Root folder of support packages, specified as a string. By default, the directory is set to:

- Windows – `'C:\MATLAB\SupportPackage\release'`
- For Unix – `'/home/user/Documents/MATLAB/SupportPackages/release'`

Here, *`release`* is your specific MATLAB release and *`user`* is your Unix user name. If the default location exists and is not empty, the location becomes *`release_num`*.

Example: `'C:\MATLAB\SupportPackage\R2016a'`

Data Types: `char`

See Also

See Also
`matlabshared.supportpkg.getSupportPackageRoot`

Topics
"Support Package Installation"

Introduced in R2016a

matlab (Linux)

Start MATLAB program from Linux system prompt

Syntax

```
matlab
matlab option1 ... optionN
```

Description

`matlab` is a Bourne shell script that starts the MATLAB program from a Linux system prompt. Here the term `matlab` refers to this script and MATLAB refers to the program.

The `matlab` script:

- Determines the MATLAB root folder, the value returned by the `matlabroot` function.
- Processes command-line options, if any.
- Reads the MATLAB startup file, `.matlab7rc.sh`.
- Sets MATLAB environment variables.

`matlab option1 ... optionN` starts MATLAB with the specified startup options.

Alternatively, assign startup options in the MATLAB ".matlab7rc.sh Startup File" on page 1-7205. Modifying the `.matlab7rc.sh` file defines startup options every time you start MATLAB.

MATLAB uses the Java Virtual Machine (JVM) software to run the desktop and to display graphics. The `-nojvm` option allows you to start MATLAB without the JVM. Using this option minimizes memory usage and improves initial startup speed, but restricts functionality.

Input Arguments

`option1 ... optionN` — One or more startup options
strings

One or more startup options, specified as strings corresponding to valid startup options from the following tables.

Mode Options

Option	Result
`-desktop`	Start MATLAB without a controlling terminal. Use this option when you start MATLAB from a window manager menu or desktop icon.
`-nodesktop`	Run the JVM software without opening the MATLAB desktop. You can use development environment tools by calling them as functions. Use this option to run in batch processing mode. If you pipe to MATLAB using the > constructor, the `nodesktop` option is used automatically. MATLAB provides a command window-only interface in the desktop environment. On the **Home** tab, click **Layout**. Then, under **Select Layout**, select **Command Window Only**.
`-nojvm`	Start MATLAB without the JVM software. Features that require Java software (such as the desktop tools and graphics) are not supported.

Display Options

Option	Result
`-noFigureWindows`	Disable the display of figure windows in MATLAB.
`-nosplash`	Do not display the splash screen during startup.
`-nodisplay`	Start the JVM software without starting the MATLAB desktop. This option does not display X commands. It overrides the `DISPLAY` environment variable.
`-display xDisp`	Send X commands to X Window Server display `xDisp`. This option overrides the `DISPLAY` environment variable.

Execute MATLAB Script or Function

Option	Result
`-r statement`	Execute the specified MATLAB *`statement`*, specified as a string or as the name of a MATLAB script or function. If *`statement`* is MATLAB code, enclose the string with double quotation marks. If *`statement`* is the name of a MATLAB function or script, do not specify the file extension and do not use quotation marks. Any required file must be on the MATLAB search path or in the startup folder. Example: `-r "disp(['Current folder: ' pwd])"` Example: `-r myscript`

Set Initial Working Folder

The initial working folder is the current folder when MATLAB starts. For more information, see "MATLAB Startup Folder".

Option	Result
`-sd folder`	Set the MATLAB startup folder to *`folder`*, specified as a string. Example: `matlab -sd "C:\work"`
`-useStartupFolderPref`	Set the MATLAB startup folder to the value specified by the **Initial working folder** option in the General Preferences panel.

Specify MATLAB Version

Option	Result
`v=variant`	Start the version of MATLAB in the `bin/arch/variant` folder instead of the `bin/arch` folder. *`arch`* is the system architecture, the value returned by the `computer('arch')` function. *`variant`* is a string representing a MATLAB version.

Debugging Options

Option	Result
`-logfile` *`filename`*	Copy Command Window output, including error reports, into *`filename`*, specified as a string. Example: `-logfile output.log`
`-n`	Display, without starting MATLAB, final values of the environment variables and arguments passed to the MATLAB executable. This option also displays other diagnostic information for use when working with a Technical Support Representative.
`-e`	Display, without starting MATLAB, all environment variables and their values to standard output. If the exit status is not `0` on return, then the variables and values might not be correct.
`-D`*`debugger debugopts`*	Start MATLAB in debug mode. This option uses the debugger program name, *`debugger`*, specified as a string, for example, `gdb`, `lldb`, or `dbx`. You can specify the full path to the debugger. This option must be the first option in the `matlab` command. Debugger program command-line options, *`debugopts`*, specified as a string of valid options for *`debugger`*. See your debugger documentation for details. Do not use any other `matlab` command options when using *`debugopts`*. Do not add a space between **D** and *`debugger`*. Example: `-Dgdb`
`-jdb` *`portnumber`*	Enable use of the Java debugger. The Java debugger uses the default *`portnumber`* value 4444 to communicate with MATLAB. The port number is optional. However, to use the Java debugger while running multiple MATLAB sessions, you must specify a port number. The *`portnumber`* value must be an integer in the range 0–65535. The integer cannot be

Option	Result
	reserved or currently in use by another application on your system.
`-debug`	Display information for debugging X-based problems. Use this option only when working with a Technical Support Representative from MathWorks, Inc.

Use Single Computational Thread

By default, MATLAB uses the multithreading capabilities of the computer on which it is running.

Option	Result
`-singleCompThread`	Limit MATLAB to a single computational thread.

Disable Searching Custom Java Class Path

Option	Result
`-nouserjavapath`	Disable use of `javaclasspath.txt` and `javalibrarypath.txt` files. For more information, see "Specifying Java Startup Options".

OpenGL Library Options

These options control the use of software OpenGL libraries when MATLAB detects a graphics driver with known issues. For more information, see "Graphics Features with OpenGL Requirements".

Option	Result
`-softwareopengl`	Force MATLAB to start with software OpenGL libraries.
`-nosoftwareopengl`	Disable auto-selection of OpenGL software.

Specify License File

Option	Result
`-c license`	Use the specified license file, *`license`*, specified as a string, a colon-separated list of license file names, or a `port@host` entry. For more information, see Understanding License Files in the "License Management" (Installation, Licensing, and Activation) documentation.

Open Student Version

Option	Result
`-student`	Open student version of MATLAB.

Help Options

Option	Result
`-h`	Display startup options without starting MATLAB.
`-help`	Same as `-h` option.

Examples

Start MATLAB Without Desktop

```
matlab -nojvm -nodisplay -nosplash
```

Display Current Folder at Startup

```
matlab -r "disp(['Current folder: ' pwd])"
```

- "Start MATLAB on Linux Platforms"

Definitions

.matlab7rc.sh Startup File

The `.matlab7rc.sh` shell script contains variable definitions used by the `matlab` script.

Use the `.matlab7rc.sh` file to redefine variables defined in the `matlab` script. `matlab` looks for the first occurrence of `.matlab7rc.sh` in the:

- Current folder
- Home folder (`$HOME`)
- *`matlabroot`*`/bin` folder

To edit the `.matlab7rc.sh` file, use the template located in the *`matlabroot`*`/bin` folder.

This table lists the variables. For more information, see the comments in the `.matlab7rc.sh` file.

Variable	Definition and Standard Assignment Behavior
`ARCH`	The machine architecture. MATLAB checks for a valid architecture in this order: • The value `ARCH` passed with the `-arch` or `-arch/ext` argument to the script. • The value of the environment variable `MATLAB_ARCH`.
`DISPLAY`	The host name of the X Window display MATLAB uses for output. The value of `Xdisplay` passed with the `-display` argument to the script is used; otherwise, the value in the environment is used. MATLAB ignores `DISPLAY` if the `-nodisplay` argument is passed.
`LD_LIBRARY_PATH`	Final Load library path. The final value is normally a colon-separated list of four sublists, each of which could be empty. The first sublist is defined in `.matlab7rc.sh` as `LDPATH_PREFIX`. The

Variable	Definition and Standard Assignment Behavior
	second sublist is computed in the script and includes folders inside the MATLAB root folder and relevant Java folders. The third sublist contains any nonempty value of `LD_LIBRARY_PATH` from the environment possibly augmented in `.matlab7rc.sh`. The final sublist is defined in `.matlab7rc.sh` as `LDPATH_SUFFIX`.
`MATLAB`	The MATLAB root folder. MATLAB uses the default computed by the script unless `MATLABdefault` is reset in `.matlab7rc.sh`. Currently `MATLABdefault` is not reset in the shipping `.matlab7rc.sh`.
`MATLABPATH`	The MATLAB search path. The final value is a colon-separated list with the `MATLABPATH` from the environment prepended to a list of computed defaults. At startup, you can add subfolders of `userpath` to the MATLAB search path. See `userpath` for details.
`SHELL`	The shell to use with the MATLAB "`!`" or `unix` commands. This value is taken from the environment, unless `SHELL` is reset in `.matlab7rc.sh`. The default `.matlab7rc.sh` file does not reset `SHELL`.
`MATLAB_SHELL`	The shell to use instead of `SHELL`. MATLAB checks for `MATLAB_SHELL` first and, if empty or not defined, checks `SHELL`. If `SHELL` is also empty or not defined, MATLAB uses the Bourne shell, `/bin/sh`. Use an absolute path for the value of `MATLAB_SHELL`, that is, `/bin/sh`, not simply `sh`. The default `.matlab7rc.sh` file does not reference or set `MATLAB_SHELL`.

Variable	Definition and Standard Assignment Behavior
TOOLBOX	The path of the toolbox folder. A nonempty value in the environment is used first. Otherwise, *matlabroot*/toolbox, computed by the script, is used unless TOOLBOX is reset in .matlab7rc.sh. Currently TOOLBOX is not reset in the shipping .matlab7rc.sh.

The matlab script determines the path of the MATLAB root folder by looking up the folder tree from the *matlabroot*/bin folder (where the matlab script is located). MATLAB use the MATLAB variable to locate all files within the MATLAB folder tree.

You can change the definition of MATLAB. For example, change the definition if you want to run a different version of MATLAB. Or change the definition if your system uses certain types of automounting schemes and the path determined by the matlab script is not correct.

See Also

See Also

computer | matlab (Mac) | matlab (Windows) | unix

Topics

"Start MATLAB on Linux Platforms"
"Specify Startup Options"
General Preferences

matlab (Mac)

Start MATLAB program from Mac Terminal

Syntax

```
matlab
matlab option1 ... optionN
```

Description

`matlab` is a Bourne shell script that starts the MATLAB program from a Mac system prompt. Here the term `matlab` refers to this script and MATLAB refers to the program.

The `matlab` script is located in the MATLAB application package, `/Applications/`*`matlabroot`*`/MATLAB_`*`release`*`.app/bin`, where *`matlabroot`* is the name of the folder in which you installed MATLAB and *`release`* is the MATLAB release number.

The `matlab` script:

- Determines the MATLAB root folder, the value returned by the `matlabroot` function.
- Processes command-line options, if any.
- Reads the MATLAB startup file, `.matlab7rc.sh`.
- Sets MATLAB environment variables.

`matlab option1 ... optionN` starts MATLAB with the specified startup options.

Alternatively, assign startup options in the MATLAB ".matlab7rc.sh Startup File" on page 1-7214. Modifying the `.matlab7rc.sh` file defines startup options every time you start MATLAB.

MATLAB uses the Java Virtual Machine (JVM) software to run the desktop and to display graphics. The `-nojvm` option allows you to start MATLAB without the JVM. Using this option minimizes memory usage and improves initial startup speed, but restricts functionality.

Input Arguments

`option1 ... optionN` — One or more startup options
strings

One or more startup options, specified as strings corresponding to valid startup options from the following tables.

Mode Options

Option	Result
`-desktop`	Start MATLAB without a controlling terminal. Use this option when you start MATLAB from a window manager menu or desktop icon.
`-nodesktop`	Run the JVM software without opening the MATLAB desktop. You can use development environment tools by calling them as functions. Use this option to run in batch processing mode. If you pipe to MATLAB using the > constructor, the `nodesktop` option is used automatically. MATLAB provides a command window-only interface in the desktop environment. On the **Home** tab, click **Layout**. Then, under **Select Layout**, select **Command Window Only**.
`-nojvm`	Start MATLAB without the JVM software. Features that require Java software (such as the desktop tools and graphics) are not supported.

Display Options

Option	Result
`-noFigureWindows`	Disable the display of figure windows in MATLAB.

Option	Result
`-nosplash`	Do not display the splash screen during startup.
`-nodisplay`	Start the JVM software without starting the MATLAB desktop.

Execute MATLAB Script or Function

Option	Result
`-r` *`statement`*	Execute the specified MATLAB *`statement`*, specified as a string or as the name of a MATLAB script or function. If *`statement`* is MATLAB code, enclose the string with double quotation marks. If *`statement`* is the name of a MATLAB function or script, do not specify the file extension and do not use quotation marks. Any required file must be on the MATLAB search path or in the startup folder. Example: `-r "disp(['Current folder: ' pwd])"` Example: `-r myscript`

Set Initial Working Folder

The initial working folder is the current folder when MATLAB starts. For more information, see “MATLAB Startup Folder”.

Option	Result
`-sd` *`folder`*	Set the MATLAB startup folder to *`folder`*, specified as a string. Example: `matlab -sd "C:\work"`
`-useStartupFolderPref`	Set the MATLAB startup folder to the value specified by the **Initial working folder** option in the General Preferences panel.

Specify MATLAB Version

Option	Result
`v=variant`	Start the version of MATLAB in the `bin/arch/variant` folder instead of the `bin/arch` folder. *`arch`* is the system architecture, the value returned by the `computer('arch')` function. *`variant`* is a string representing a MATLAB version.

Debugging Options

Option	Result
`-logfile filename`	Copy Command Window output, including error reports, into *`filename`*, specified as a string. Example: `-logfile output.log`
`-n`	Display, without starting MATLAB, final values of the environment variables and arguments passed to the MATLAB executable. This option also displays other diagnostic information for use when working with a Technical Support Representative.
`-e`	Display, without starting MATLAB, all environment variables and their values to standard output. If the exit status is not `0` on return, then the variables and values might not be correct.
`-Ddebugger debugopts`	Start MATLAB in debug mode. This option uses the debugger program name, *`debugger`*, specified as a string, for example, `gdb`, `lldb`, or `dbx`. You can specify the full path to the debugger. This option must be the first option in the `matlab` command. Debugger program command-line options, *`debugopts`*, specified as a string of valid options for *`debugger`*. See your debugger documentation for details. Do not use any other `matlab` command options when using *`debugopts`*. Do not add a space between **D** and *`debugger`*.

Option	Result
	Example: `-Dlldb`
`-jdb` *`portnumber`*	Enable use of the Java debugger. The Java debugger uses the default *`portnumber`* value 4444 to communicate with MATLAB. The port number is optional. However, to use the Java debugger while running multiple MATLAB sessions, you must specify a port number. The *`portnumber`* value must be an integer in the range 0–65535. The integer cannot be reserved or currently in use by another application on your system.

Use Single Computational Thread

By default, MATLAB uses the multithreading capabilities of the computer on which it is running.

Option	Result
`-singleCompThread`	Limit MATLAB to a single computational thread.

Disable Searching Custom Java Class Path

Option	Result
`-nouserjavapath`	Disable use of `javaclasspath.txt` and `javalibrarypath.txt` files. For more information, see "Specifying Java Startup Options".

Specify License File

Option	Result
`-c` *`license`*	Use the specified license file, *`license`*, specified as a string, a colon-separated list of license file names,

Option	Result
	or a `port@host` entry. For more information, see Understanding License Files in the "License Management" (Installation, Licensing, and Activation) documentation.

Open Student Version

Option	Result
`-student`	Open student version of MATLAB.

Help Options

Option	Result
`-h`	Display startup options without starting MATLAB.
`-help`	Same as `-h` option.

Examples

Start MATLAB R2015a from Applications Folder

Move to the `bin` folder within the application package for MATLAB installed in a folder named `MyMATLAB`.

```
cd /Applications/MyMATLAB/MATLAB_R2015a.app/bin
```

Preface the `matlab` command with `./` characters.

```
./matlab -nosplash
```

Start MATLAB from Any Folder

Start MATLAB R2015a from any Terminal folder by specifying the full path name. Assume MATLAB is installed in a folder named `MyMATLAB`.

```
/Applications/MyMATLAB/MATLAB_R2015a.app/bin/matlab
```

Start MATLAB Without Desktop

```
matlab -nojvm -nodisplay -nosplash
```

Display Current Folder at Startup

```
matlab -r "disp(['Current folder: ' pwd])"
```

- "Start MATLAB on Mac Platforms"

Definitions

.matlab7rc.sh Startup File

The `.matlab7rc.sh` shell script contains variable definitions used by the `matlab` script. To redefine variables defined in the `matlab` script, modify the `.matlab7rc.sh` file.

`matlab` looks for the first occurrence of `.matlab7rc.sh` in the:

- Current folder
- Home folder `($HOME)`
- *`matlabroot`*`/bin` folder

To edit the `.matlab7rc.sh` file, use the template located in the *`matlabroot`*`/bin` folder.

The following table lists the variables. For more information, see the comments in the `.matlab7rc.sh` file.

`.matlab7rc.sh` Variable	Definition and Standard Assignment Behavior
`ARCH`	The machine architecture. MATLAB checks for a valid architecture in this order: • The value `ARCH` passed with the `-arch` or `-arch/ext` argument to the script. • The value of the environment variable `MATLAB_ARCH`.

`.matlab7rc.sh` Variable	Definition and Standard Assignment Behavior
`DYLD_LIBRARY_PATH`	Final Load library path. The final value is normally a colon-separated list of four sublists, each of which could be empty. The first sublist is defined in `.matlab7rc.sh` as `LDPATH_PREFIX`. The second sublist is computed in the script and includes folders inside the MATLAB root folder and relevant Java folders. The third sublist contains any nonempty value of `DYLD_LIBRARY_PATH` from the environment possibly augmented in `.matlab7rc.sh`. The final sublist is defined in `.matlab7rc.sh` as `LDPATH_SUFFIX`.
`MATLAB`	The MATLAB root folder. MATLAB uses the default computed by the script unless `MATLABdefault` is reset in `.matlab7rc.sh`. Currently `MATLABdefault` is not reset in the shipping `.matlab7rc.sh`.
`MATLABPATH`	The MATLAB search path. The final value is a colon-separated list with the `MATLABPATH` from the environment prepended to a list of computed defaults. At startup, you can add subfolders of `userpath` to the MATLAB search path. See `userpath` for details.
`SHELL`	The shell to use with the MATLAB "`!`" or `unix` commands. This value is taken from the environment, unless `SHELL` is reset in `.matlab7rc.sh`. The default `.matlab7rc.sh` file does not reset `SHELL`.

`.matlab7rc.sh` Variable	Definition and Standard Assignment Behavior
`MATLAB_SHELL`	The shell to use instead of `SHELL`. MATLAB checks for `MATLAB_SHELL` first and, if empty or not defined, checks `SHELL`. If `SHELL` is also empty or not defined, MATLAB uses the Bourne shell, `/bin/sh`. Use an absolute path for the value of `MATLAB_SHELL`, that is, `/bin/sh`, not simply `sh`. The default `.matlab7rc.sh` file does not reference or set `MATLAB_SHELL`.
`TOOLBOX`	Path of the toolbox folder. A nonempty value in the environment is used first. Otherwise, *`matlabroot`*`/toolbox`, computed by the script, is used unless `TOOLBOX` is reset in `.matlab7rc.sh`. Currently `TOOLBOX` is not reset in the shipping `.matlab7rc.sh`.

The `matlab` script determines the path of the MATLAB root folder by looking up the folder tree from the *`matlabroot`*`/bin` folder (where the `matlab` script is located). MATLAB use the `MATLAB` variable to locate all files within the MATLAB folder tree.

You can change the definition of `MATLAB`. For example, change the definition if you want to run a different version of MATLAB. Or change the definition if your system uses certain types of automounting schemes and the path determined by the `matlab` script is not correct.

See Also

See Also

`matlab (Windows)` | `matlab (Linux)` | `matlabroot` | `unix`

Topics

"Start MATLAB on Mac Platforms"
"Specify Startup Options"

General Preferences

matlab (Windows)

Start MATLAB program from Windows system prompt

Syntax

```
matlab
matlab option1 ... optionN
```

Description

`matlab` starts the MATLAB program from the Microsoft Windows system prompt. Here the term `matlab` refers to the command you type, and MATLAB refers to the program).

The `matlab` command:

- Determines the MATLAB root folder, the value returned by the `matlabroot` function.
- Processes command-line options and passes other options to MATLAB.

`matlab option1 ... optionN` starts MATLAB with the specified startup options.

Input Arguments

`option1 ... optionN` — One or more startup options
strings

One or more startup options, specified as strings corresponding to valid startup options from the following tables.

Display Options

Option	Result
`-noFigureWindows`	Disable the display of figure windows in MATLAB.
`-nosplash`	Do not display the splash screen during startup.

Execute MATLAB Script or Function

Option	Result
`-r statement`	Execute the MATLAB *`statement`*, specified as a string or as the name of a MATLAB script or function. If *`statement`* is MATLAB code, enclose the string with double quotation marks. If *`statement`* is the name of a MATLAB function or script, do not specify the file extension and do not use quotation marks. Any required file must be on the MATLAB search path or in the startup folder. Example: `-r "disp(['Current folder: ' pwd])"` Example: `-r myscript`

Set Initial Working Folder

The initial working folder is the current folder when MATLAB starts. For more information, see "MATLAB Startup Folder".

Option	Result
`-sd folder`	Set the MATLAB startup folder to *`folder`*, specified as a string. Example: `matlab -sd "C:\work"`
`-useStartupFolderPref`	Set the MATLAB startup folder to the value specified by the **Initial working folder** option in the General Preferences panel.

Debugging Options

Option	Result
`-logfile filename`	Copy Command Window output, including error log reports, in to *`filename`*, specified as a string. Example: `-logfile output.log`

Option	Result
`-jdb` *`portnumber`*	Enable use of the Java debugger. The Java debugger uses the default *`portnumber`* value 4444 to communicate with MATLAB. The port number is optional. However, to use the Java debugger while running multiple MATLAB sessions, you must provide a port number. The *`portnumber`* value must be an integer in the range 0–65535. The integer cannot be reserved or currently in use by another application on your system.

Use Single Computational Thread

By default, MATLAB uses the multithreading capabilities of the computer on which it is running.

Option	Result
`-singleCompThread`	Limit MATLAB to a single computational thread.

Disable Searching Custom Java Class Path

Option	Result
`-nouserjavapath`	Disable use of `javaclasspath.txt` and `javalibrarypath.txt` files. For more information, see "Specifying Java Startup Options".

OpenGL Library Options

These options control the use of software OpenGL libraries when MATLAB detects a graphics driver with known issues. For more information, see "Graphics Features with OpenGL Requirements".

Option	Result
`-softwareopengl`	Force MATLAB to start with software OpenGL libraries.
`-nosoftwareopengl`	Disable auto-selection of OpenGL software.

COM Automation Server Options

Option	Result
`-automation`	Start MATLAB as a Component Object Model (COM) Automation server. MATLAB does not display the splash screen and minimizes the window. Use for a single call to MATLAB.
`-regserver`	Register MATLAB as a COM Automation server in the Windows registry. MATLAB displays a minimized command window; close this window. You must have administrator privileges to change the Windows registry. Based on your User Account Control (UAC) settings, you might need to right-click a Windows Command Processor and select **Run as administrator**. If that option is not available, contact your system administrator. MATLAB remains registered until you use the `-unregserver` option. Alternatively, you can register MATLAB from the MATLAB command prompt. Type: `!matlab -regserver` MATLAB displays a minimized command window. To continue working with MATLAB, open this window and exit MATLAB.
`-unregserver`	Remove MATLAB COM server entries from the registry.

Wait for MATLAB to Terminate

By default, when you call the `matlab` command from a script, the command starts MATLAB and then immediately executes the next statements in the script. The `-wait` option pauses the script until MATLAB terminates.

Option	Result
`-wait`	Use in a startup script to process the results from MATLAB. Calling MATLAB with this option blocks the script from continuing until the results are generated.

Specify License File

For more information, see Understanding License Files in the "License Management" (Installation, Licensing, and Activation) documentation.

Option	Result
`-c` *`license`*	Use the License File, *`license`*, specified as a string, a colon-separated list of license file names, or a `port@host` entry. If specifying multiple files, separate the names by semicolons and enclose the entire list in quotation marks. If the path to your license file contains a space, enclose the path name in quotation marks. Example: `-c "c:\TMW license \license_agreement.txt"`

Open Student Version

Option	Result
`-student`	Open student version of MATLAB.

Help Options

Option	Result
`-h`	Display startup options without starting MATLAB.

Option	Result
`-help`	Same as `-h` option.
`-?`	Same as `-h` option.

Examples

Startup Without Splash Screen

```
matlab -nosplash
```

Copy Command Window Output into output.log File

```
matlab -logfile output.log
```

Tips

- To add folders to the MATLAB search path at startup, set the `MATLABPATH` environment variable before running the `matlab` command. For more information, see "Add Folders to the MATLAB Search Path at Startup".

See Also

See Also

`matlab (Linux)` | `matlab (Mac)` | `matlabroot` | `memory` | `userpath`

Topics

"Start MATLAB on Windows Platforms"
"MATLAB Startup Folder"
"Specify Startup Options"

max

Largest elements in array

Syntax

```
M = max(A)
M = max(A,[],dim)
[M,I] = max(___)

C = max(A,B)

___ = max(___,nanflag)
```

Description

`M = max(A)` returns the largest elements of `A`.

- If `A` is a vector, then `max(A)` returns the largest element of `A`.
- If `A` is a matrix, then `max(A)` is a row vector containing the maximum value of each column.
- If `A` is a multidimensional array, then `max(A)` operates along the first array dimension whose size does not equal `1`, treating the elements as vectors. The size of this dimension becomes `1` while the sizes of all other dimensions remain the same. If `A` is an empty array whose first dimension has zero length, then `max(A)` returns an empty array with the same size as `A`.

`M = max(A,[],dim)` returns the largest elements along dimension `dim`. For example, if `A` is a matrix, then `max(A,[],2)` is a column vector containing the maximum value of each row.

`[M,I] = max(___)` finds the indices of the maximum values of `A` and returns them in output vector `I`, using any of the input arguments in the previous syntaxes. If the maximum value occurs more than once, then `max` returns the index corresponding to the first occurrence.

`C = max(A,B)` returns an array with the largest elements taken from `A` or `B`.

`___ = max(___,nanflag)` specifies whether to include or omit `NaN` values in the calculation for any of the previous syntaxes. For the single input case, to specify `nanflag` without specifying `dim`, use `max(A,[],nanflag)`. For example, `max(A,[],'includenan')` includes all `NaN` values in `A` while `max(A,[],'omitnan')` ignores them.

Examples

Largest Vector Element

Create a vector and compute its largest element.

```
A = [23 42 37 18 52];
M = max(A)
```

```
M = 52
```

Largest Complex Element

Create a complex vector and compute its largest element, that is, the element with the largest magnitude.

```
A = [-2+2i 4+i -1-3i];
max(A)
```

```
ans =
   4.0000 + 1.0000i
```

Largest Element in Each Matrix Column

Create a matrix and compute the largest element in each column.

```
A = [2 8 4; 7 3 9]
```

```
A =

     2     8     4
     7     3     9
```

```
M = max(A)

M =

     7     8     9
```

Largest Element in Each Matrix Row

Create a matrix and compute the largest element in each row.

```
A = [1.7 1.2 1.5; 1.3 1.6 1.99]

A =

    1.7000    1.2000    1.5000
    1.3000    1.6000    1.9900


M = max(A,[],2)

M =

    1.7000
    1.9900
```

Largest Element Indices

Create a matrix A and compute the largest elements in each column, as well as the row indices of A in which they appear.

```
A = [1 9 -2; 8 4 -5]

A =

     1     9    -2
     8     4    -5


[M,I] = max(A)

M =
```

```
     8     9    -2

I =

     2     1     1
```

Largest Element Comparison

Create a matrix and return the largest value between each of its elements compared to a scalar.

```
A = [1 7 3; 6 2 9]
```

```
A =

     1     7     3
     6     2     9
```

```
B = 5;
C = max(A,B)
```

```
C =

     5     7     5
     6     5     9
```

Largest Element in Matrix

Create a matrix `A` and use its column representation, `A(:)`, to find the value and index of the largest element.

```
A = [8 2 4; 7 3 9]
```

```
A =

     8     2     4
     7     3     9
```

```
A(:)
```

```
ans =

     8
     7
     2
     3
     4
     9
```

```
[M,I] = max(A(:))
```

```
M = 9
```

```
I = 6
```

`I` is the index of `A(:)` containing the largest element.

Now, use the `ind2sub` function to extract the row and column indices of `A` corresponding to the largest element.

```
[I_row, I_col] = ind2sub(size(A),I)
```

```
I_row = 2
```

```
I_col = 3
```

If you need only the maximum value of `A` and not its index, then call the `max` function twice.

```
M = max(max(A))
```

```
M = 9
```

Largest Element Involving `NaN`

Create a vector and compute its maximum, excluding `NaN` values.

```
A = [1.77 -0.005 3.98 -2.95 NaN 0.34 NaN 0.19];
```

```
M = max(A,[],'omitnan')
```

```
M = 3.9800
```

`max(A)` will also produce this result since `'omitnan'` is the default option.

Use the `'includenan'` flag to return `NaN`.

```
M = max(A,[],'includenan')
```

```
M = NaN
```

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

- If `A` is complex, then `max(A)` returns the complex number with the largest magnitude. If magnitudes are equal, then `max(A)` returns the value with the largest magnitude and the largest phase angle.
- If `A` is a scalar, then `max(A)` returns `A`.
- If `A` is a 0-by-0 empty array, then `max(A)` is as well.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension whose length reduces to `1`. The `size(M,dim)` is `1`, while the sizes of all other dimensions remain the same, unless `size(A,dim)` is `0`. If `size(A,dim)` is `0`, then `max(A,dim)` returns an empty array with the same size as `A`.

Consider a two-dimensional input array, `A`:

- If `dim = 1`, then `max(A,[],1)` returns a row vector containing the largest element in each column.

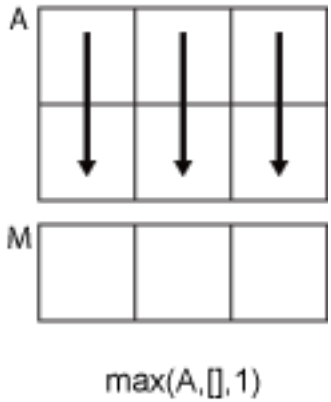

- If `dim = 2`, then `max(A,[],2)` returns a column vector containing the largest element in each row.

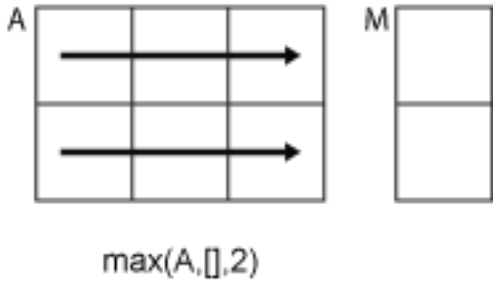

`max` returns `A` if `dim` is greater than `ndims(A)`.

`B` — Additional input array

scalar | vector | matrix | multidimensional array

Additional input array, specified as a scalar, vector, matrix, or multidimensional array. Numeric inputs `A` and `B` must either be the same size or have sizes that are compatible (for example, `A` is an `M`-by-`N` matrix and `B` is a scalar or `1`-by-`N` row vector). For more information, see “Compatible Array Sizes for Basic Operations”.

If `A` and `B` are datetime, duration, or categorical arrays, then they must be the same size unless one is a scalar.

- A and B must be the same data type unless one is a double. In that case, the data type of the other array can be single, duration, or any integer type.
- If A and B are ordinal categorical arrays, they must have the same sets of categories with the same order.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | categorical | datetime | duration
Complex Number Support: Yes

nanflag — NaN condition
'omitnan' (default) | 'includenan'

NaN condition, specified as one of these values:

- 'omitnan' — Ignore all NaN values in the input.
- 'includenan' — Include the NaN values in the input for the calculation.

For datetime arrays, you can also use 'omitnat' or 'includenat' to omit and include NaT values, respectively.

The max function does not support the nanflag option for categorical arrays.

Data Types: char

Output Arguments

M — Maximum values
scalar | vector | matrix | multidimensional array

Maximum values, returned as a scalar, vector, matrix, or multidimensional array. size(M,dim) is 1, while the sizes of all other dimensions match the size of the corresponding dimension in A, unless size(A,dim) is 0. If size(A,dim) is 0, then M is an empty array with the same size as A.

I — Index to maximum values of A
scalar | vector | matrix | multidimensional array

Index to maximum values of A, returned as a scalar, vector, matrix, or multidimensional array. I is the same size as M. If the largest element occurs more than once, then I contains the index to the first occurrence of the value.

C — Maximum elements from A or B
scalar | vector | matrix | multidimensional array

Maximum elements from A or B, returned as a scalar, vector, matrix, or multidimensional array. The size of C is determined by implicit expansion of the dimensions of A and B. For more information, see "Compatible Array Sizes for Basic Operations".

The data type of C depends on the data types of A and B:

- If A and B are the same data type, then C matches the data type of A and B.
- If either A or B is `single`, then C is `single`.
- If either A or B is an integer data type with the other a scalar `double`, then C assumes the integer data type.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

- The two-output syntax `[Y,I] = max(...)` is not supported.

For more information, see "Tall Arrays".

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you specify `dim`, then it must be a constant.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

- See “Code Generation for Complex Data with Zero-Valued Imaginary Parts” (MATLAB Coder).

See Also

See Also

`mean` | `median` | `min` | `sort`

Topics

“Matrix Indexing”

Introduced before R2006a

MaximizeCommandWindow

Open Automation server window

Syntax

IDL Method Signature

```
HRESULT MaximizeCommandWindow(void)
```

Microsoft Visual Basic Client

```
MaximizeCommandWindow
```

MATLAB Client

```
MaximizeCommandWindow(h)
```

Description

`MaximizeCommandWindow(h)` displays the window for the server attached to handle `h`, and makes it the currently active window on the desktop.

`MaximizeCommandWindow` restores the window to the size it had at the time it was minimized, not to the maximum size on the desktop. If the server window was not previously in a minimized state, `MaximizeCommandWindow` does nothing.

Examples

From a Visual Basic .NET client, modify the size of the command window in a MATLAB Automation server.

```
Dim Matlab As Object

Matlab = CreateObject("matlab.application")
```

```
Matlab.MinimizeCommandWindow

'Now return the server window to its former state on
'the desktop and make it the currently active window.

Matlab.MaximizeCommandWindow
```

See Also

MinimizeCommandWindow

Topics

Introduced before R2006a

maxNumCompThreads

Control maximum number of computational threads

Syntax

```
N = maxNumCompThreads
LASTN = maxNumCompThreads(N)
LASTN = maxNumCompThreads('automatic')
```

Description

`N = maxNumCompThreads` returns the current maximum number of computational threads `N`.

`LASTN = maxNumCompThreads(N)` sets the maximum number of computational threads to `N`, and returns the previous maximum number of computational threads, `LASTN`.

`LASTN = maxNumCompThreads('automatic')` sets the maximum number of computational threads using what the MATLAB software determines to be the most desirable. It additionally returns the previous maximum number of computational threads, `LASTN`.

Currently, the maximum number of computational threads is equal to the number of computational cores on your machine.

Note Setting the maximum number of computational threads using `maxNumCompThreads` does not propagate to your next MATLAB session.

You can set the `-singleCompThread` option when starting MATLAB to limit MATLAB to a single computational thread. By default, MATLAB makes use of the multithreading capabilities of the computer on which it is running.

Introduced in R2007b

mean

Average or mean value of array

Syntax

```
M = mean(A)
M = mean(A,dim)
M = mean( ___ ,outtype)
M = mean( ___ ,nanflag)
```

Description

`M = mean(A)` returns the mean of the elements of `A` along the first array dimension whose size does not equal 1.

- If `A` is a vector, then `mean(A)` returns the mean of the elements.
- If `A` is a matrix, then `mean(A)` returns a row vector containing the mean of each column.
- If `A` is a multidimensional array, then `mean(A)` operates along the first array dimension whose size does not equal 1, treating the elements as vectors. This dimension becomes `1` while the sizes of all other dimensions remain the same.

`M = mean(A,dim)` returns the mean along dimension `dim`. For example, if `A` is a matrix, then `mean(A,2)` is a column vector containing the mean of each row.

`M = mean( ___ ,outtype)` returns the mean with a specified data type, using any of the input arguments in the previous syntaxes. `outtype` can be `'default'`, `'double'`, or `'native'`.

`M = mean( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `mean(A,'includenan')` includes all `NaN` values in the calculation while `mean(A,'omitnan')` ignores them.

Examples

Mean of Matrix Columns

Create a matrix and compute the mean of each column.

```
A = [0 1 1; 2 3 2; 1 3 2; 4 2 2]
```

```
A =

     0     1     1
     2     3     2
     1     3     2
     4     2     2
```

```
M = mean(A)
```

```
M =

    1.7500    2.2500    1.7500
```

Mean of Matrix Rows

Create a matrix and compute the mean of each row.

```
A = [0 1 1; 2 3 2]
```

```
A =

     0     1     1
     2     3     2
```

```
M = mean(A,2)
```

```
M =

    0.6667
    2.3333
```

Mean of 3-D Array

Create a 4-by-2-by-3 array of integers between 1 and 10 and compute the mean values along the second dimension.

```
A = gallery('integerdata',10,[4,2,3],1);
M = mean(A,2)
```

```
M =

(:,:,1) =

    9.5000
    6.5000
    9.5000
    6.0000


(:,:,2) =

    1.5000
    4.0000
    7.5000
    7.5000


(:,:,3) =

    7.0000
    2.5000
    4.0000
    5.5000
```

Mean of Single-Precision Array

Create a single-precision vector of ones and compute its single-precision mean.

```
A = single(ones(10,1));
M = mean(A,'native')
```

```
M = single
    1
```

The result is also in single precision.

```
class(M)
```

```
ans =
'single'
```

Mean Excluding NaN

Create a vector and compute its mean, excluding NaN values.

```
A = [1 0 0 1 NaN 1 NaN 0];
M = mean(A,'omitnan')
```

```
M = 0.5000
```

If you do not specify `'omitnan'`, then `mean(A)` returns NaN.

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

- If A is a scalar, then `mean(A)` returns A.
- If A is an empty 0-by-0 matrix, then `mean(A)` returns NaN.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `datetime` | `duration`

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension whose length reduces to `1`. The `size(M,dim)` is `1`, while the sizes of all other dimensions remain the same.

Consider a two-dimensional input array, A.

- If `dim = 1`, then `mean(A,1)` returns a row vector containing the mean of the elements in each column.



mean(A,1)

- If `dim = 2`, then `mean(A,2)` returns a column vector containing the mean of the elements in each row.

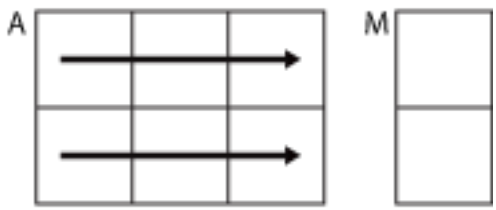

mean(A,2)

`mean` returns A when `dim` is greater than `ndims(A)` or when `size(A,dim)` is 1.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`outtype` — Output data type
`'default'` (default) | `'double'` | `'native'`

Output data type, specified as `'default'`, `'double'`, or `'native'`. These options also specify the data type in which the operation is performed.

outtype	Output data type
'default'	double, unless the input data type is single, duration, or datetime, in which case, the output is 'native'
'double'	double, unless the data type is duration or datetime, in which case, 'double' is not supported
'native'	same data type as the input, unless • Input data type is logical, in which case, the output is double • Input data type is char, in which case, 'native'is not supported

Data Types: char

nanflag — NaN condition
'includenan' (default) | 'omitnan'

NaN condition, specified as one of these values:

- 'includenan' — Include NaN values when computing the mean, resulting in NaN.
- 'omitnan' — Ignore all NaN values in the input.

For datetime arrays, you can also use 'omitnat' or 'includenat' to omit and include NaT values, respectively.

Data Types: char

Definitions

Mean

For a random variable vector A made up of N scalar observations, the mean is defined as

$$\mu = \frac{1}{N}\sum_{i=1}^{N} A_i.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

- Tall datetime arrays are not supported.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you specify `dim`, then it must be a constant.
- The `outtype` and `nanflag` options must be constant character vectors.
- Integer types do not support the `'native'` output data type option.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

See Also

`median` | `mode` | `std` | `sum` | `var`

Introduced before R2006a

matlab.unittest.measurement.MeasurementResult class

Package: matlab.unittest.measurement

Result of measuring test suite

Description

A `MeasurementResult` holds results from running a measurement experiment on a test suite. It contains the measurement values, categories, and timestamps, and information about the functional test results.

When you run an experiment, the testing framework returns a `MeasurementResult` object for each `Test` object in the suite.

Properties

`Name` — Name of the test suite element

character vector

Name of the test suite element that corresponds to the measurement result, returned as a character vector.

`Valid` — Indicator if measurement is valid

`logical` 0 or 1

Indicator if the measurement is valid, returned as `logical` 0 or 1. A measurement is valid (`logical` 1) if it is collected from a passing test. Otherwise it is invalid (`logical` 0).

`Samples` — Information about sample measurements

table

Information about sample measurements, returned as a table containing these columns:

Column Name	Description
Name	Name of the test suite element.
MeasuredValu	Value of the measurement. Experiments can give this column a more specific name, such as `MeasuredTime`.
Timestamp	Time of measurement.
Host	Machine name.
Platform	Platform architecture.
Version	MATLAB Version.
RunIdentifier	Unique identifier of measurement run.

The `Samples` table does not include information from warm-up runs.

`TestActivity` — Information about all test activity
table

Information about all test activity, including the warm-up measurements, returned as a table. This table is useful when you want all the data, such as during debugging or when performing a more involved data analysis. The `TestActivity` table contains these columns in addition to the columns described for `Samples`:

Column Name	Description
Passed	Logical value indicating if the test passed
Failed	Logical value indicating if the test failed
Incomplete	Logical value indicating if test run is incomplete
Objective	Categorical value indicating the type of measurement: `sample` or `warmup`
TestResult	`TestResult` object from the functional test

Methods

samplefun	Apply function across samples of `MeasurementResult` array

sampleSummary	Create table of summary statistics from `MeasurementResult` array

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.unittest.TestResult | matlab.unittest.TestSuite

Introduced in R2016a

samplefun

Class: matlab.unittest.measurement.MeasurementResult
Package: matlab.unittest.measurement

Apply function across samples of `MeasurementResult` array

Syntax

```
[B1,...,Bm] = samplefun(fh,R)
[B1,...,Bm] = samplefun(fh,R,'UniformOutput',tf)
```

Description

`[B1,...,Bm] = samplefun(fh,R)` applies a function `fh` across the samples on each element of a `MeasurementResult` array. Each output argument from `samplefun` corresponds to an output argument from `fh` and has the same size and shape as `R`.

`[B1,...,Bm] = samplefun(fh,R,'UniformOutput',tf)` indicates if the output of `fh` can be returned without encapsulation in a cell array. By default, `fh` must return scalar values that can be concatenated into an array.

Input Arguments

`fh` — Function to apply

function handle

Function to apply across the samples on each element of a `MeasurementResult` array, specified as a function handle.

`R` — Results from running a measurement experiment on a test suite

`MeasurementResult` array

Results from running a measurement experiment on a test suite, specified as a `MeasurementResult` array.

`tf` — Indicator whether to combine results into cell array

`true` (default) | `false`

Indicator whether to combine results into cell array, specified as `true` or `false`. This value is `true` by default, which indicates that the output of `fh` can be returned without encapsulation in a cell array. Therefore, `fh` must return scalar values that can be concatenated into an array. To obtain results in a cell array, set `tf` to `false`.

Examples

Apply Function to Measurement Results

In your current working folder, create a class-based test, `preallocationTest.m`, that compares different methods of preallocation.

```
classdef preallocationTest < matlab.perftest.TestCase
    methods(Test)
        function testOnes(testCase)
            x = ones(1,1e7);
        end

        function testIndexingWithVariable(testCase)
            id = 1:1e7;
            x(id) = 1;
        end

        function testIndexingOnLHS(testCase)
            x(1:1e7) = 1;
        end

        function testForLoop(testCase)
            for i=1:1e7
                x(i) = 1;
            end
        end

    end
end
```

Create a test suite.

```
suite = testsuite('preallocationTest');
```

Construct a variable time experiment, and run the tests.

```
import matlab.perftest.TimeExperiment
experiment = TimeExperiment.limitingSamplingError;
R = run(experiment,suite);
```

```
Running preallocationTest
..........
..........
..........
......Warning: Target Relative Margin of Error not met after running the MaxSamples
for preallocationTest/testOnes.
....
..........
..........
..........
..........
.....
Done preallocationTest
__________
```

For each test element, find the mean time of the samples.

```
M = samplefun(@mean,R)
```

```
M =

    0.0350    0.1351    0.0789    0.7337
```

For each test element, find the minimum time and index to the minimum time.

```
[M,I] = samplefun(@min,R)
```

```
M =

    0.0258    0.1169    0.0691    0.6531


I =
```

```
    27      3      1      1
```

Apply Custom Function to Measurement Results

In your current working folder, create a class-based test, `preallocationTest.m`, that compares different methods of preallocation.

```
classdef preallocationTest < matlab.perftest.TestCase
    methods(Test)
        function testOnes(testCase)
            x = ones(1,1e7);
        end

        function testIndexingWithVariable(testCase)
            id = 1:1e7;
            x(id) = 1;
        end

        function testIndexingOnLHS(testCase)
            x(1:1e7) = 1;
        end

        function testForLoop(testCase)
            for i=1:1e7
                x(i) = 1;
            end
        end

    end
end
```

Create a test suite.

```
suite = testsuite('preallocationTest');
```

Construct a fixed time experiment with 26 sample measurements, and run the tests.

```
import matlab.perftest.TimeExperiment
experiment = TimeExperiment.withFixedSampleSize(26);
R = run(experiment,suite);
```

```
Running preallocationTest
```

```
..........
..........
..........
..........
..........
..........
..........
..........
..........
..........
....
Done preallocationTest
__________
```

In your current working folder, create a function, `customSampleFun`, that computes the mean of each of the 26 samples, converts the mean to milliseconds, and returns a character vector indicating if the mean time was fast or slow.

```
function [mean_ms,speed] = customSampleFun(S)
threshold_ms = 100;
mean_ms = mean(S)*1e3;
if mean_ms < threshold_ms
    speed = 'fast';
else
    speed = 'slow';
end
end
```

Apply `customSampleFun` to each element in the `MeasurementResult` array. Since the character vectors aren't scalar, specify `UniformOutput` as false.

```
[mean_ms,speed] = samplefun(@customSampleFun,R,'UniformOutput',false)
```

```
mean_ms =

  1×4 cell array

    [30.9500]    [142.7037]    [83.9830]    [806.3446]


speed =
```

```
1×4 cell array

  'fast'    'slow'    'fast'    'slow'
```

See Also

See Also

matlab.unittest.measurement.MeasurementResult.sampleSummary

Introduced in R2017a

sampleSummary

Class: matlab.unittest.measurement.MeasurementResult
Package: matlab.unittest.measurement

Create table of summary statistics from `MeasurementResult` array

Syntax

```
T = sampleSummary(R)
```

Description

`T = sampleSummary(R)` creates a table of summary statistics from a `MeasurementResult` array.

Input Arguments

R — Results array
`MeasurementResult` array

Results array from running a measurement experiment on a test suite, specified as a `MeasurementResult` array.

Output Arguments

T — Measurement sample summary
table

Measurement sample summary, returned as a table. The table contains the following columns: `Name`, `SampleSize`, `Mean`, `StandardDeviation`, `Min`, `Median`, and `Max`.

Examples

Generate Table of Summary Statistics

In your current working folder, create a class-based test, `preallocationTest.m`, that compares different methods of preallocation.

```
classdef preallocationTest < matlab.perftest.TestCase
    methods(Test)
        function testOnes(testCase)
            x = ones(1,1e7);
        end

        function testIndexingWithVariable(testCase)
            id = 1:1e7;
            x(id) = 1;
        end

        function testIndexingOnLHS(testCase)
            x(1:1e7) = 1;
        end

        function testForLoop(testCase)
            for i=1:1e7
                x(i) = 1;
            end
        end

    end
end
```

Create a test suite.

```
suite = testsuite('preallocationTest');
```

Construct a time experiment with a variable number of sample measurements, and run the tests.

```
import matlab.perftest.TimeExperiment
experiment = TimeExperiment.limitingSamplingError;
R = run(experiment,suite);
```

```
Running preallocationTest
```

```
..........
..........
..........
..........
..........
.....
Done preallocationTest
__________
```

Create a table of summary statistics from the result array R.

```
T = sampleSummary(R)
```

```
T =

  4×7 table array

                        Name                        SampleSize      Mean      StandardDev
    ____________________________________________    __________    ________    ___________

    preallocationTest/testOnes                       4             0.02649    0.00086703
    preallocationTest/testIndexingWithVariable      16             0.13356      0.014525
    preallocationTest/testIndexingOnLHS             13            0.073571     0.0073962
    preallocationTest/testForLoop                    6             0.74768       0.03897
```

See Also

See Also

matlab.unittest.measurement.MeasurementResult.samplefun

Introduced in R2017a

median

Median value of array

Syntax

```
M = median(A)
M = median(A,dim)
M = median( ___ ,nanflag)
```

Description

`M = median(A)` returns the median value of `A`.

- If `A` is a vector, then `median(A)` returns the median value of `A`.
- If `A` is a nonempty matrix, then `median(A)` treats the columns of `A` as vectors and returns a row vector of median values.
- If `A` is an empty 0-by-0 matrix, `median(A)` returns `NaN`.
- If `A` is a multidimensional array, then `median(A)` treats the values along the first array dimension whose size does not equal `1` as vectors. The size of this dimension becomes `1` while the sizes of all other dimensions remain the same.

`median` computes natively in the numeric class of `A`, such that `class(M) = class(A)`.

`M = median(A,dim)` returns the median of elements along dimension `dim`. For example, if `A` is a matrix, then `median(A,2)` is a column vector containing the median value of each row.

`M = median( ___ ,nanflag)` optionally specifies whether to include or omit `NaN` values in the median calculation for any of the previous syntaxes. For example, `median(A,'omitnan')` ignores all `NaN` values in `A`.

Examples

Median of Matrix Columns

Define a 4-by-3 matrix.

```
A = [0 1 1; 2 3 2; 1 3 2; 4 2 2]
```

```
A =

     0     1     1
     2     3     2
     1     3     2
     4     2     2
```

Find the median value of each column.

```
M = median(A)
```

```
M =

    1.5000    2.5000    2.0000
```

For each column, the median value is the mean of the middle two numbers in sorted order.

Median of Matrix Rows

Define a 2-by-3 matrix.

```
A = [0 1 1; 2 3 2]
```

```
A =

     0     1     1
     2     3     2
```

Find the median value of each row.

```
M = median(A,2)
```

```
M =

     1
     2
```

For each row, the median value is the middle number in sorted order.

Median of 3-D Array

Create a 1-by-3-by-4 array of integers between 1 and 10.

```
A = gallery('integerdata',10,[1,3,4],1)
```

```
A =

(:,:,1) =

    10     8    10


(:,:,2) =

     6     9     5


(:,:,3) =

     9     6     1


(:,:,4) =

     4     9     5
```

Find the median values of this 3-D array along the second dimension.

```
M = median(A)
```

```
M =

(:,:,1) =

    10


(:,:,2) =
```

```
     6

(:,:,3) =

     6

(:,:,4) =

     5
```

This operation produces a 1-by-1-by-4 array by computing the median of the three values along the second dimension. The size of the second dimension is reduced to 1.

Compute the median along the first dimension of A.

```
M = median(A,1);
isequal(A,M)
```

```
ans = logical
   1
```

This command returns the same array as A because the size of the first dimension is 1.

Median of 8-Bit Integer Array

Define a 1-by-4 vector of 8-bit integers.

```
A = int8(1:4)
```

```
A = 1×4 int8 row vector

   1   2   3   4
```

Compute the median value.

```
M = median(A),
```

```
M = int8
```

```
    3
```

```
class(M)
```

```
ans =
'int8'
```

M is the mean of the middle two numbers in sorted order returned as an 8-bit integer.

Median Excluding NaN

Create a vector and compute its median, excluding NaN values.

```
A = [1.77 -0.005 3.98 -2.95 NaN 0.34 NaN 0.19];
M = median(A,'omitnan')
```

```
M = 0.2650
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array. A can be a numeric array, ordinal `categorical` array, `datetime` array, or `duration` array.

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension whose length reduces to `1`. The `size(M,dim)` is `1`, while the sizes of all other dimensions remain the same.

Consider a two-dimensional input array, A.

- If `dim = 1`, then `median(A,1)` returns a row vector containing the median of the elements in each column.

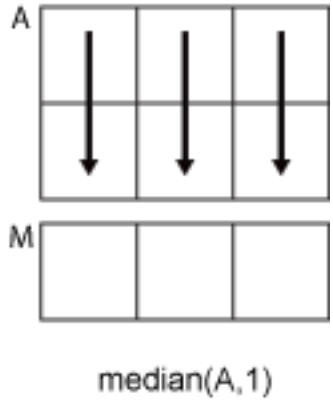

- If `dim = 2`, then `median(A,2)` returns a column vector containing the median of the elements in each row.

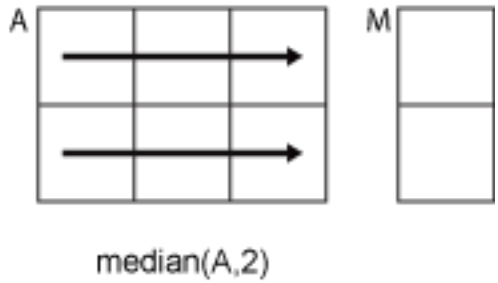

`median` returns `A` when `dim` is greater than `ndims(A)`.

`nanflag` — `NaN` condition
`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of these values:

- `'includenan'` — the median of input containing `NaN` values is also `NaN`.
- `'omitnan'` — all `NaN` values appearing in the input are ignored. Note: the `NaN` flags are not set to `0`.

For `datetime` arrays, you can also use `'omitnat'` or `'includenat'` to omit and include `NaT` values, respectively.

The `median` function does not support the `nanflag` option for `categorical` arrays.

Data Types: `char`

Algorithms

For ordinal categorical arrays, MATLAB interprets the median of an even number of elements as follows:

If the number of categories between the middle two values is ...	Then the median is ...
zero (values are from consecutive categories)	larger of the two middle values
an odd number	value from category occurring midway between the two middle values
an even number	value from larger of the two categories occurring midway between the two middle values

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If specified, `dim` must be a constant.
- "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder)
- "Code Generation for Complex Data with Zero-Valued Imaginary Parts" (MATLAB Coder).

See Also

See Also

`corrcoef` | `cov` | `max` | `mean` | `min` | `mode` | `std` | `var`

Introduced before R2006a

memmapfile

Create memory map to a file

Syntax

```
m = memmapfile(filename)
m = memmapfile(filename,Name,Value)
```

Description

`m = memmapfile(filename)` maps an existing file, `filename`, to memory and returns the memory map, `m`.

Memory-mapping is a mechanism that maps a portion of a file, or an entire file, on disk to a range of memory addresses within the MATLAB address space. Then, MATLAB can access files on disk in the same way it accesses dynamic memory, accelerating file reading and writing. Memory-mapping allows you to work with data in a file as if it were a MATLAB array.

`m = memmapfile(filename,Name,Value)` specifies the properties of `m` using one or more name-value pair arguments. For example, you can specify the format of the data in the file.

Examples

Map Entire File of `uint8` Data

At the command prompt, create a sample file in your current folder called `records.dat`, containing 10 `uint8` values.

```
myData = uint8(1:10)';

fileID = fopen('records.dat','w');
fwrite(fileID, myData,'uint8');
fclose(fileID);
```

Create a map for `records.dat`. When using `memmapfile`, the default data format is `uint8` so the file name is the only required input argument in this case.

```
m = memmapfile('records.dat')
```

```
m =

    Filename: 'd:\matlab\records.dat'
    Writable: false
      Offset: 0
      Format: 'uint8'
      Repeat: Inf
        Data: 10x1 uint8 array
```

MATLAB maps the entire `records.dat` file to memory, setting all properties of the memory map to their default values. The memory map is assigned to the variable, `m`. In this example, the command maps the entire file as a sequence of unsigned 8-bit integers and gives the caller read-only access to its contents.

View the mapped data by accessing the `Data` property of `m`.

```
m.Data
```

```
ans =

    1
    2
    3
    4
    5
    6
    7
    8
    9
   10
```

Map Entire File of Double-Precision Data

Create a memory map for double-precision data. The syntax is similar when specifying other data types.

At the command prompt, create a sample file in your current folder called `records.dat`, containing 10 `double` values.

```
myData = (1:10)';
```

```
fileID = fopen('records.dat','w');
fwrite(fileID,myData,'double');
fclose(fileID);
```

Create a memory map for `records.dat`, and set the `Format` property for the output to `'double'`.

```
m = memmapfile('records.dat','Format','double') ;
```

The memmapfile, `m`, contains the following properties: `Filename`, `Writable`, `Offset`, `Format`, `Repeat`, and `Data`. To display any one property, for example `Format`, type `m.Format` in the command window.

```
m.Format
```

```
ans =
'double'
```

The `Data` property contains the 10 double-precision values in `records.dat`.

Map and Change Part of a File

Create a memory map for a large array of `int32` data. Specify write access, and nondefault `Format` and `Offset` values.

At the command prompt, create a sample file in your current folder called `records.dat`, containing 10,000 `int32` values.

```
myData = int32([1:10000]);

fileID = fopen('records.dat','w');
fwrite(fileID,myData,'int32');
fclose(fileID);
```

Create a memory map for `records.dat`, and set the `Format` property for the output to `int32`. Also, set the `Offset` property to disregard the first 9000 bytes in the file, and the `Writable` property to permit write access.

```
m = memmapfile('records.dat',...
               'Offset',9000,...
               'Format','int32',...
               'Writable',true);
```

An `Offset` value of `9000` indicates that the first 9000 bytes of `records.dat` are not mapped.

Type the name of the memory map to see the current settings for all properties.

```
m
```

```
m =
    Filename: 'd:\matlab\records.dat'
    Writable: true
      Offset: 9000
      Format: 'int32'
      Repeat: Inf
        Data: 7750x1 int32 array
```

The `Format` property indicates that any read or write operation made via the memory map reads and writes the file contents as a sequence of signed 32-bit integers. The `Data` property contains only 7750 elements because the first 9000 bytes of `records.dat`, representing the first 2250 values in the file, are not mapped.

View the first five elements of the mapped data by accessing the `Data` property of `m`.

```
m.Data(1:5)
```

```
ans =

        2251
        2252
        2253
        2254
        2255
```

Map Region of File to Specific Array Shape

Create a memory map for a region of a file containing 100 double-precision values.

At the command prompt, create a sample file in your current folder called `mybinary.bin`, containing 100 double-precision values.

```
randData = gallery('uniformdata',[100,1],0,'double');

fileID = fopen('mybinary.bin','w');
fwrite(fileID,randData,'double');
fclose(fileID);
```

Map the first 75 values in `mybinary.bin` to a 5-by-5-by-3 array of double-precision values that can be referenced in the structure of the memory map using the field name `x`. Specify these parameters with the `Format` name-value pair argument.

```
m = memmapfile('mybinary.bin',...
               'Format',{'double',[5 5 3],'x'})
```

```
m =

    Filename: 'd:\matlab\mybinary.bin'
    Writable: false
      Offset: 0
      Format: {'double' [5 5 3] 'x'}
      Repeat: Inf
        Data: 1x1 struct array with fields:
                x
```

The `Data` property is a structure array that contains the mapped values in the field, `x`.

Assign the mapped data to a variable, `A`. Because the `Data` property is a structure array, you must index into the field, `x`, to access the data.

```
A = m.Data.x;
```

View information about `A`.

```
whos A
```

```
  Name      Size              Bytes  Class     Attributes

  A         5x5x3               600  double
```

Map Segments of File to Multiple Arrays

Map segments of a file with different array shapes and data types to memory.

At the command prompt, create a sample file in your current folder called `mybinary.bin`. Write `uint16` data and double-precision data representing sample pressure, temperature, and volume values into the file. In this case, each of the `uint16` arrays are 50-by-1 and the double-precision arrays are 5-by-10. `k` is a sample scaling factor.

```
k = 8.21;
[pres1,temp1] = gallery('integerdata',[1,300],[50,1],0,'uint16');
vol1 = double(reshape(k*temp1./pres1,5,10));
```

```
[pres2,temp2] = gallery('integerdata',[5,500],[50,1],5,'uint16');
vol2 = double(reshape(k*temp2./pres2,5,10));

fileID = fopen('mybinary.bin','w');
fwrite(fileID,pres1,'uint16');
fwrite(fileID,temp1,'uint16');
fwrite(fileID,vol1,'double');
fwrite(fileID,pres2,'uint16');
fwrite(fileID,temp2,'uint16');
fwrite(fileID,vol2,'double');
fclose(fileID);
```

Map the file to arrays accessible by unique names. Define a field, `pressure`, containing a 50-by-1 array of `uint16` values, followed by a field, `temperature`, containing 50-by-1 `uint16` values. Define a field, `volume`, containing a 5-by-10 array of double-precision values. Use a cell array to define the format of the mapped region and repeat the pattern twice.

```
m = memmapfile('mybinary.bin',...
'Format',{'uint16',[50 1],'pressure';...
'uint16',[50,1],'temperature';...
'double',[5,10],'volume'},'Repeat',2)
```

```
m =

    Filename: 'd:\matlab\mybinary.bin'
    Writable: false
      Offset: 0
      Format: {'uint16' [50 1] 'pressure'
               'uint16' [50 1] 'temperature'
               'double' [5 10] 'volume'}
      Repeat: 2
        Data: 2x1 struct array with fields:
         pressure
      temperature
           volume
```

The `Data` property of the memory map, `m`, is a 2-by-1 structure array because the `Format` is applied twice.

Copy the `Data` property to a variable, `A`. Then, view the last block of `double` data, which you can access using the field name, `volume`.

```
A = m.Data;
```

```
myVolume = A(2).volume
```

```
myVolume =

     2    13    32     5     5    16     4    22     3     8
     2     9    53    38    13    19    23    85     2   120
    29    10     6     1     2     5     6    58    20    11
     7    15     4     1     5    18     1     4    14     8
     9     8     4     2     0     9     8     6     3     3
```

- "Map File to Memory"

Input Arguments

`filename` — Name of file to map

character vector

Name of the file to map including the file extension, specified as a character vector. The `filename` argument cannot include any wildcard characters (for example, `*` or `?`).

Example: `'myFile.dat'`

Data Types: `char`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `m = memmapfile('myFile.dat','Format','int32','Offset',255)` maps `int32` data in the file, `myFile.dat`, to memory starting from the 256th byte.

`'Writable'` — Type of access allowed to mapped region

`false` (default) | `true`

Type of access allowed to the mapped region, specified as the comma-separated pair consisting of `'Writable'` and either `true` or `false`. If the `Writable` property is set to `false`, the mapped region is read-only. If `true`, then write access is allowed.

Example: `'Writable',true`

Data Types: `logical`

`'Offset'` — Number of bytes from start of file to start of mapped region

0 (default) | nonnegative integer

Number of bytes from the start of the file to the start of the mapped region, specified as the comma-separated pair consisting of `'Offset'` and a nonnegative integer. This value is zero-based. That is, an `Offset` value of 0 represents the start of the file.

Example: `'Offset',1024`

Data Types: `double`

`'Format'` — Format of mapped region

`'uint8'` (default) | character vector | `n`-by-3 cell array

Format of the mapped region contents, specified as the comma-separated pair consisting of `'Format'` and a single character vector or an `n`-by-3 cell array.

- If the file region you are mapping contains data of only one type, specify the `Format` value as a character vector identifying that type.
  Example: `'int16'`
- To specify an array shape to apply to the data read or written to the mapped file, and a field name to reference this array, specify the `Format` value as a 1-by-3 cell array. The first cell contains a character vector identifying the data type to apply to the mapped region. The second cell contains the array dimensions to apply to the region. The third cell specifies the field name to use in the `Data` structure array of the memory map.
  Example: `{'uint64',[30 4 10],'x'}`
- If the region you are mapping is composed of segments of varying data types or array shapes, you can specify an individual format for each segment using an `n`-by-3 cell array, where `n` is the number of segments.
  Example: `{'uint64',[30 4 10],'x'; 'uint32',[30 4 6],'y'}`

You can use any of the following data types when you specify a `Format` value:

- `'int8'`
- `'int16'`
- `'int32'`
- `'int64'`
- `'uint8'`

- 'uint16'
- 'uint32'
- 'uint64'
- 'single'
- 'double'

Data Types: char | cell

'Repeat' — Number of times to apply Format parameter
Inf (default) | positive integer

Number of times to apply the Format parameter to the mapped region of the file, specified as the comma-separated pair consisting of 'Repeat' and a positive integer. If the value of Repeat is Inf, then memmapfile applies the Format parameter until the end of the file.

Example: 'Repeat',2000

Data Types: double

Output Arguments

m — Memory map
memmapfile object

Memory map, returned as a memmapfile object with the following properties.

Property	Description
Filename	Path and name of the mapped file
Writable	Type of access allowed to the mapped region
Offset	Number of bytes from the start of the file to the start of the mapped region
Format	Format of the contents of the mapped region, including data type, array size, and field name by which to access the data
Repeat	Number of times to apply the pattern specified by the Format property to the mapped region of the file

Property	Description
`Data`	Memory-mapped data from the file. `Data` can be a numeric array or a structure array with field names specified in the `Format` property

The values for any property (except for `Data`) are set at the time you call `memmapfile`, using name-value pair arguments.

Access any property of `m` with dot notation similar to accessing fields of a structure array. For example, to access the memory-mapped data in the `Data` property, do one of the following:

- If `Data` is a numeric array, call `m.Data`.
- If `Data` is a scalar (1-by-1) structure array, call `m.Data.`*`fieldname`*, where *`fieldname`* is the name of a field.
- If `Data` is a nonscalar structure array, call `m.Data(`*`index`*`).`*`fieldname`* where *`index`* is the index for the element in the structure array, and *`fieldname`* is the name of a field. For example, to access the file data in the `temperature` field of the first element of `Data`, call `m.Data(1).temperature`.

After you create a memory map, `m`, you can change the value of any of its properties, except for `Data`. To assign a new value, use dot notation. For example, to set a new `Offset` value for `m`, type:

```
m.Offset = 2048;
```

Tips

- You can map only an existing file. You cannot create a new file and map that file to memory in one operation. Use the MATLAB file I/O functions to create the file before attempting to map it to memory.
- After `memmapfile` locates the file, MATLAB stores the file's absolute pathname internally, and then uses this stored path to locate the file from that point on. As a result, you can work in other directories outside your current work directory and retain access to the mapped file.
- `memmapfile` does not expand or append to a mapped file. Use instead standard file I/O functions like `fopen` and `fwrite`.

Algorithms

The actual mapping of a file to the MATLAB address space does not take place when you construct a `memmapfile` object. A memory map, based on the information currently stored in the mapped object, is generated the first time you reference or modify the `Data` property for that object.

See Also

Topics

"Map File to Memory"
"Overview of Memory-Mapping"

Introduced before R2006a

memoize

Add memoization semantics to function handle

Memoization is an optimization technique used to speed up programs by caching the results of expensive function calls and returning the cached result when the program is called with the same inputs.

Consider memoizing a function call if all of the following are true:

- Performance is important.
- The function is time consuming.
- The function has return values that are determined entirely by the input values, and has no side effects.
- System memory is adequate to store unique input and output combinations.

Syntax

```
memoizedFcn = memoize(fh)
```

Description

`memoizedFcn = memoize(fh)` adds memoization semantics to the input function handle, and returns a `MemoizedFunction` object. Invoke `memoizedFcn` as you would invoke `fh`. However, `memoizedFcn` is not a function handle.

The `MemoizedFunction` object maintains the cache of inputs and the corresponding outputs. When it is invoked, MATLAB returns the associated cached output values if the following conditions are true.

1. The input arguments are numerically equal to cached inputs. When comparing input values, MATLAB treats `NaN`s as equal.
2. The number of requested output arguments matches the number of cached outputs associated with the inputs.

The memoization of a function is associated with the input function and not with the `MemoizedFunction` object. Therefore, keep the following in mind.

- Constructing a new `MemoizedFunction` object to the same function creates another reference to the same data. Two variables that memoize the same function share a cache and object property values, such as cache size. In the following example, the variables `a` and `b` share a cache and have the same value for cache size.

  ```
  a = memoize(@svd);
  b = memoize(@svd);
  ```

  Similarly, clearing the cache for `b` (`b.clearCache`) also clears the cache for `a`, and any other variables that memoize the `svd` function. `clearCache` is a `MemoizedFunction` object function.
- Assigning a `MemoizedFunction` object to a new variable creates another reference to the same data. In the following example, the variables `c` and `d` share data.

  ```
  c = memoize(@svd);
  d = c;
  ```
- Clearing a variable does not clear the cache associated with the input function. To clear the cache for a `MemoizedFunction` object that no longer exists in the workspace, create a new `MemoizedFunction` object to the same function, and use the `clearCache` function on the new object. Alternatively, you can clear caches for all `MemoizedFunction` objects using the `clearAllMemoizedCaches` function.

Caution: A `MemoizedFunction` object is not aware of updates to the underlying function. If you modify the function associated with the memoized function, clear the cache with the `clearCache` object function.

Examples

Cache Results from MATLAB Built-in Function

To speed up performing a singular value decomposition when you could be operating on the same inputs multiple times, memoize the `svd` function.

```
fh = @svd;
memoizedFcn = memoize(fh);
```

Create a matrix and cache the results of the singular value decomposition. Time the function call.

```
X = magic(1234);
```

```
tic
[U,S,V]= memoizedFcn(X);
preCachedTime = toc
```

```
preCachedTime = 0.5378
```

Call the memoized function again using the same inputs. To observe the speed improvement using cached results, time the function call again.

```
tic
[U,S,V]= memoizedFcn(X);
postCachedTime = toc
```

```
postCachedTime = 0.0776
```

Cache Results from User-Defined Function

In your current working folder, create a file `computeNumberCombinations.m` that contains the following function to compute the number of combinations of `n` items taken `k` at a time.

```
type computeNumberCombinations.m
```

```
function c = computeNumberCombinations(n,k)
% Calculate number of combinations of n items taken k at a time
c = fact(n)/(fact(n-k)*fact(k));
end

function f = fact(n)
f = 1;
for m = 2:n
    f = f*m;
end
end
```

Memoize the `computeNumberCombinations` function to speed up computation for repeated input values.

```
fh = @computeNumberCombinations;
memoizedFcn = memoize(fh);
```

Call the memoized function and time the function call. This function call caches the results for the specified inputs.

```
tic
```

```
c = memoizedFcn(56,42);
preCachedTime = toc
```

```
preCachedTime = 0.2224
```

Call the memoized function and time the function call again. This function call uses the cached results and does not execute the function.

```
tic
c = memoizedFcn(56,42);
postCachedTime = toc
```

```
postCachedTime = 0.1233
```

Input Arguments

`fh` — Function to memoize
function handle

Function to memoize, specified as a function handle.

Example: `memoizedEigs = memoize(@eigs)`

Data Types: `function_handle`

Tips

- Multiple calls to `memoize` with the same function handle return the same `MemoizedFunction` object. For example:

  ```
  x = memoize(@plus);
  y = memoize(@plus);
  x == y
  ```

  ```
  ans =

    logical

     1
  ```

- You should not memoize a function with side effects such as setting some global state or performing I/O operations. Side effects are not repeated on subsequent calls to the

memoized function with the same inputs. For example, if you memoize the `randi` function, the memoized function always returns the same value when called with the same input argument.

```
fh = @randi;
memoized_fh = memoize(fh);

fh_result = [fh(100) fh(100) fh(100)]
memoized_result = [memoized_fh(100) memoized_fh(100) memoized_fh(100)]
```

```
fh_result =

    18    71     4


memoized_result =

    28    28    28
```

See Also

See Also

Functions
`clearAllMemoizedCaches`

Using Objects
`MemoizedFunction`

Introduced in R2017a

MemoizedFunction

Call memoized function and cache results

Description

A `MemoizedFunction` object maintains the memoization semantics of a function handle and a cache of the function call results. It has the same calling syntax as the function handle specified in the `Function` property. However, the `MemoizedFunction` object is not a function handle.

The first time you call the memoized function with a certain set of input values, MATLAB executes the function specified by the `Function` property and caches the results. In later calls to the memoized function with the same set of inputs, MATLAB returns the cached results instead of executing the function again.

The `MemoizedFunction` object maintains the cache of inputs and the corresponding outputs. When it is invoked, MATLAB returns the associated cached output values if the following conditions are true.

1. The input arguments are numerically equal to cached inputs. When comparing input values, MATLAB treats `NaN`s as equal.
2. The number of requested output arguments matches the number of cached outputs associated with the inputs.

Caution: A `MemoizedFunction` object is not aware of updates to the underlying function. If you modify the function associated with the memoized function, clear the cache with the `clearCache` object function.

Create Object

To create a `MemoizedFunction` object, call the `memoize` function.

The memoization of a function is associated with the input function and not with the `MemoizedFunction` object. Therefore, keep the following in mind.

- Constructing a new `MemoizedFunction` object to the same function creates another reference to the same data. Two variables that memoize the same function share a

cache and object property values, such as cache size. In the following example, the variables `a` and `b` share a cache and have the same value for cache size.

```
a = memoize(@svd);
b = memoize(@svd);
```

Similarly, clearing the cache for `b` (`b.clearCache`) also clears the cache for `a`, and any other variables that memoize the `svd` function. `clearCache` is a `MemoizedFunction` object function.

- Assigning a `MemoizedFunction` object to a new variable creates another reference to the same data. In the following example, the variables `c` and `d` share data.

```
c = memoize(@svd);
d = c;
```

- Clearing a variable does not clear the cache associated with the input function. To clear the cache for a `MemoizedFunction` object that no longer exists in the workspace, create a new `MemoizedFunction` object to the same function, and use the `clearCache` function on the new object. Alternatively, you can clear caches for all `MemoizedFunction` objects using the `clearAllMemoizedCaches` function.

Properties

`MemoizedFunction` properties control the behavior of the memoized function. You can access or modify properties of the memoized function. Use dot notation to refer to a particular object and property:

```
m = memoize(@ones);
m.CacheSize = 25;
```

`Function` — Function with memoization semantics applied

function handle

Function with memoization semantics applied, returned as a function handle. This property is read only.

Data Types: `function_handle`

`CacheSize` — Maximum number of cached input and output combinations

10 (default) | positive integer

Maximum number of cached input and output combinations, specified as a positive integer.

Example:

Data Types: `double`

`Enabled` — Caching state
`true` (default) | `false`

Caching state, specified as `true` or `false`. To instruct MATLAB to call the function specified by the `Function` property regardless of whether the results are cached, and not to cache results, set this property to `false`.

Data Types: `logical`

Object Functions

clearCache	Clear cache for MemoizedFunction object
stats	Return cached values and statistics for MemoizedFunction object

Examples

Change Cache Size of Memoized Function

Create a `MemoizedFunction` object by memozing the `datetime` function.

```
mf = memoize(@datetime)
```

```
mf 
  MemoizedFunction with properties:

     Function: @datetime
      Enabled: 1
    CacheSize: 10
```

Change the maxinum number of cached input and output combinations.

```
mf.CacheSize = 2
```

```
mf 
  MemoizedFunction with properties:
```

```
     Function: @datetime
      Enabled: 1
    CacheSize: 2
```

Call the memoized function with three different input values.

```
a = mf('today');
b = mf('yesterday');
c = mf('tomorrow');
```

Call the `stats` function to investigate the cached results.

```
s = stats(mf);
s.Cache.Inputs{:}
```

```
ans = cell
    'yesterday'


ans = cell
    'tomorrow'
```

The results of calling the memoized function with `'today'` are not cached because the `CacheSize` is 2.

Disable Memoization

In your current working folder, create the following file `memoizeSquareExample.m` that contains a function to compute the square of a number. When the function is called, if MATLAB returns cached results, `msg` is not displayed.

```
type memoizeSquareExample.m
```

```
function m = memoizeSquareExample(n)

m = n^2;
msg = "The square of " + string(n) + " is " + string(m) +".";
disp(msg)

end
```

Memoize the function. By default, memoization is enabled.

```
mf = memoize(@memoizeSquareExample);
```

Call the memoized function twice with the same input value. `msg` is displayed only once because the second function call returns cached results.

```
a = mf(42);
```

```
The square of 42 is 1764.
```

```
b = mf(42);
```

Disable memoization and call the memoized function with a repeat input value. Although the results for an input of 42 are cached, `msg` is displayed because memoization is disabled.

```
mf.Enabled = false;
c = mf(42);
```

```
The square of 42 is 1764.
```

Call the memoized function with a different set of inputs.

```
d = mf(13);
```

```
The square of 13 is 169.
```

Call the `stats` function to investigate the cached results. MATLAB does not return cached results while memoization is disabled or collect statistics, it continues to store input and output values.

```
s = mf.stats();
s.Cache.Inputs{:}
```

```
ans = cell
    [42]
```

See Also

See Also

`clearAllMemoizedCaches` | `memoize`

Introduced in R2017a

memory

Display memory information

Syntax

```
memory
userview = memory
[userview systemview] = memory
```

Limitations

- The `memory` function is available only on Microsoft Windows systems. Results are dependant on your computer hardware and the load on your computer.

Description

`memory` displays information showing how much memory is available and how much the MATLAB software is currently using. The information displayed at your computer screen includes the following items, each of which is described in a section below:

- "Maximum Possible Array" on page 1-7287
- "Memory Available for All Arrays" on page 1-7288
- "Memory Used By MATLAB" on page 1-7288
- "Physical Memory (RAM)" on page 1-7289

`userview = memory` returns user-focused information on memory use in structure `userview`. The information returned in `userview` includes the following items, each of which is described in a section below:

- "Maximum Possible Array" on page 1-7287
- "Memory Available for All Arrays" on page 1-7288
- "Memory Used By MATLAB" on page 1-7288

`[userview systemview] = memory` returns both user- and system-focused information on memory use in structures `userview` and `systemview`, respectively.

The `userview` structure is described in the command syntax above. The information returned in `systemview` includes the following items, each of which is described in a section below:

- "Virtual Address Space" on page 1-7289
- "System Memory" on page 1-7290
- "Physical Memory (RAM)" on page 1-7289

Output Arguments

Each of the sections below describes a value that is displayed or returned by the `memory` function.

Maximum Possible Array

Maximum Possible Array is the size of the largest contiguous free memory block. As such, it is an upper bound on the largest single array MATLAB can create at this time.

MATLAB derives this number from the smaller of the following two values:

- The largest contiguous memory block found in the MATLAB virtual address space
- The total available system memory

To see how many array elements this number represents, divide by the number of bytes in the array class. For example, for a `double` array, divide by 8. The actual number of elements MATLAB can create is always fewer than this number.

When you enter the `memory` command without assigning its output, MATLAB displays this information in the Command Window. When you do assign the output, MATLAB returns the information in a structure field. See the table below.

Command	Returned in
`memory`	Character vector labelled `Maximum possible array:`
`user = memory`	Structure field `user.MaxPossibleArrayBytes`

All values are double-precision and in units of bytes.

Footnotes

When you enter the `memory` command without specifying any outputs, MATLAB may also display one of the following footnote on 64-bit systems:

`Limited by System Memory (physical + swap file) available.`

There is insufficient system memory to allow mapping of all virtual addresses in the largest available block of the MATLAB process.

Memory Available for All Arrays

Memory Available for All Arrays is the total amount of memory available to hold data. The amount of memory available is guaranteed to be at least as large as this field.

MATLAB derives this number from the smaller of the following two values:

- The total available MATLAB virtual address space
- The total available system memory

When you enter the `memory` command without assigning its output, MATLAB displays this information in the Command Window. When you do assign the output, MATLAB returns the information in a structure field. See the table below.

Command	Returned in
`memory`	Character vector labelled `Memory available for all arrays:`
`user = memory`	Structure field `user.MemAvailableAllArrays`

Footnotes

When you enter the `memory` command without specifying any outputs, MATLAB may also display the following footnote on 64-bit systems:

`Limited by System Memory (physical + swap file) available.`

There is insufficient system memory to allow mapping of all available virtual addresses in the MATLAB process.

Memory Used By MATLAB

Memory Used By MATLAB is the total amount of system memory reserved for the MATLAB process. It is the sum of the physical memory and potential swap file usage.

When you enter the `memory` command without assigning its output, MATLAB displays this information in the Command Window. When you do assign the output, MATLAB returns the information in a structure field. See the table below.

Command	Returned in
`memory`	Character vector labelled `Memory used by MATLAB:`
`user = memory`	Structure field `user.MemUsedMATLAB`

Physical Memory (RAM)

Physical Memory is the available and total amounts of physical memory (RAM) on the computer running MATLAB.

When you enter the `memory` command without assigning its output, MATLAB displays the total memory in the Command Window. When you do assign the output, MATLAB returns both the available and total memory in a structure field. See the table below.

Command	Value	Returned in
`memory`	Total memory	Character vector labelled `Physical Memory (RAM):`
`[user,sys] = memory`	Available memory	Structure field `sys.PhysicalMemory.Available`
	Total memory	Structure field `sys.PhysicalMemory.Total`

Available physical memory is the same as **Available** found in the Windows Task Manager: Performance/Physical Memory, and the total physical memory is the same as **Total**.

You can use the amount of available physical memory as a measure of how much data you can access quickly.

Virtual Address Space

Virtual Address Space is the amount of available and total virtual memory for the MATLAB process. MATLAB returns the information in two fields of the return structure: `Available` and `Total`.

Command	Return Value	Returned in Structure Field
`[user,sys] = memory`	Available memory	`sys.VirtualAddressSpace.Available`
	Total memory	`sys.VirtualAddressSpace.Total`

You can monitor the difference:

```
VirtualAddressSpace.Total - VirtualAddressSpace.Available
```

as the Virtual Bytes counter in the Windows Performance Monitor (e.g., Windows 7 Control Panel/Administrative Tools/Performance Monitor). If you add a counter, the **Virtual Bytes** counter is found under the **Process** menu. Select the counter, and then select MATLAB from the **Instances of selected object** pane.

System Memory

System Memory is the amount of available system memory on your computer system. This number includes the amount of available physical memory and the amount of available swap file space on the computer running MATLAB. MATLAB returns the information in the `SystemMemory` field of the return structure.

Command	Return Value	Returned in Structure Field
`[user,sys] = memory`	Available memory	`sys.SystemMemory`

This is the same as the difference:

```
limit - total (in bytes)
```

found in the Windows Task Manager: Performance/Commit Charge.

Examples

Display memory statistics on a 64-bit Windows system:

```
memory
```

```
Maximum possible array:            14253 MB (1.495e+10 bytes) *
Memory available for all arrays:           14253 MB (1.495e+10 bytes) *
Memory used by MATLAB:              747 MB (7.833e+08 bytes)
Physical Memory (RAM):            12279 MB (1.288e+10 bytes)

*  Limited by System Memory (physical + swap file) available.
```

Return in the structure `userview`, information on the largest array MATLAB can create at this time, how much memory is available to hold data, and the amount of memory currently being used by your MATLAB process:

```
userview = memory
```

```
userview =

    MaxPossibleArrayBytes: 1.4957e+10
    MemAvailableAllArrays: 1.4957e+10
            MemUsedMATLAB: 784044032
```

Assign the output to two structures, `user` and `sys`, to obtain the information shown here:

```
[user, sys] = memory;

%  --- Largest array MATLAB can create ---
user.MaxPossibleArrayBytes

ans =
   1.4956e+10

%  --- Memory available for data ---
user.MemAvailableAllArrays

ans =
   1.4956e+10

%  --- Memory used by MATLAB process ---
user.MemUsedMATLAB

ans =
   784039936

%  --- Virtual memory for MATLAB process ---
sys.VirtualAddressSpace

ans =
    Available: 8.7910e+12
        Total: 8.7961e+12

%  --- Physical memory and paging file ---
sys.SystemMemory

ans =
```

```
    Available: 1.4956e+10

%   --- Computer's physical memory ---
sys.PhysicalMemory

ans =
    Available: 2.7093e+09
        Total: 1.2876e+10
```

Tutorials

- "How MATLAB Allocates Memory"
- "Strategies for Efficient Use of Memory"
- "Resolve "Out of Memory" Errors"

Tips

Details on Memory Used By MATLAB

MATLAB computes the value for Memory Used By MATLAB by walking the MATLAB process memory structures and summing all the sections that have physical storage allocated in memory or in the paging file on disk.

Using the Windows Task Manager, you have for the MATLAB.exe image:

```
Mem Usage < MemUsedMATLAB < Mem Usage + VM Size (in bytes)
```

where both of the following are true:

- `Mem Usage` is the working set size in kilobytes.
- `VM Size` is the page file usage, or private bytes, in kilobytes.

The working set size is the portion of the MATLAB virtual address space that is *currently* resident in RAM and can be referenced without a memory page fault. The page file usage gives the portion of the MATLAB virtual address space that requires a backup that doesn't already exist. Another name for page file usage is *private bytes*. It includes all MATLAB variables and workspaces. Since some of the pages in the page file may also be part of the working set, this sum is an overestimate of `MemUseMATLAB`. Note that there are virtual pages in the MATLAB process space that already have a backup. For example, code loaded from EXEs and DLLs and memory-mapped files. If any part of

those files is in memory when the memory builtin is called, that memory will be counted as part of `MemUsedMATLAB`.

Reserved Addresses

Reserved addresses are addresses sets aside in the process virtual address space for some specific future use. These reserved addresses reduce the size of `MemAvailableAllArrays` and can reduce the size of the current or future value of `MaxPossibleArrayBytes`.

Example 1 — Java Virtual Machine (JVM)

At MATLAB startup, part of the MATLAB virtual address space is reserved by the Java Virtual Machine (JVM) and cannot be used for storing MATLAB arrays.

Example 2 — Standard Windows Heap Manager

MATLAB, by default, uses the standard Windows heap manager except for a set of small preselected allocation sizes. One characteristic of this heap manager is that its behavior depends upon whether the requested allocation is less than or greater than the fixed number of 524,280 bytes. For, example, if you create a sequence of MATLAB arrays, each less than 524,280 bytes, and then clear them all, the `MemUsedMATLAB` value before and after shows little change, and the `MemAvailableAllArrays` value is now smaller by the total space allocated.

The result is that, instead of globally freeing the extra memory, the memory becomes reserved. It can *only* be reused for arrays less than 524,280 bytes. You cannot reclaim this memory for a larger array except by restarting MATLAB.

See Also

`clear` | `pack` | `whos` | `inmem` | `save` | `load` | `mlock` | `munlock`

Topics

"How MATLAB Allocates Memory"
"Strategies for Efficient Use of Memory"
"Resolve "Out of Memory" Errors"

Introduced in R2008a

menu

(Not recommended) Create multiple-choice dialog box

Note: The `menu` function is not recommended. Instead, use the `dialog` function to create multiple choice dialog boxes.

Syntax

```
choice = menu(mtitle,opt1,opt2,...,optn)
choice = menu(mtitle,options)
```

Description

`choice = menu(mtitle,opt1,opt2,...,optn)` displays the menu whose title is specified by the character vector `mtitle` and whose choices are the character vectors `opt1`, `opt2`,... `optn`. The menu opens in a modal dialog box. The `menu` function returns the number of the selected menu item, or 0 if the user clicks the close button on the window.

`choice = menu(mtitle,options)` , where options is a 1-by-N cell array of character vectors containing the menu choices.

If the user's terminal provides a graphics capability, `menu` displays the menu items as push buttons in a figure window (Example 1). Otherwise. they will be given as a numbered list in the Command Window (Example 2).

Examples

Example 1

On a system with a display, `menu` displays choices as buttons in a dialog box:

```
choice = menu('Choose a color','Red','Blue','Green')
```
displays the following dialog box.



The number entered by the user in response to the prompt is returned as `choice` (i.e., `choice = 2` implies that the user selected `Blue`).

After input is accepted, the dialog box closes, returning the output in `choice`. You can use `choice` to control the color of a graph:

```
t = 0:.1:60;
s = sin(t);
color = ['r','b','g']
plot(t,s,color(choice))
```

Example 2

On a system without a display, `menu` displays choices in the Command Window:

```
choice = menu('Choose a color','Red','Blue','Green')
```

displays the following text.

```
----- Choose a color -----
1) Red
2) Blue
3) Green
Select a menu number:
```

Tips

To call `menu` from a uicontrol or other ui object, set that object's `Interruptible` property to `'on'`. For more information, see Uicontrol Properties.

See Also

`guide` | `input` | `uicontrol` | `uimenu` | `dialog`

Introduced before R2006a

mergecats

Merge categories in categorical array

Syntax

```
B = mergecats(A,oldcats)
B = mergecats(A,oldcats,newcat)
```

Description

`B = mergecats(A,oldcats)` merges two or more categories in `A` into the first category, `oldcats(1)`. Any values in `A` from `oldcats` become `oldcats(1)` in `B`.

`B = mergecats(A,oldcats,newcat)` merges `oldcats` into a single new category, `newcat`. Any values in `A` from `oldcats` become `newcat` in `B`.

Examples

Merge Two Categories into One

Create a categorical array containing various colors.

```
A = categorical({'red';'blue';'pink';'red';'blue';'red'})
```

```
A = 6×1 categorical array
     red
     blue
     pink
     red
     blue
     red
```

`A` is a 6-by-1 categorical array.

Display the categories of `A`.

```
categories(A)
```

```
ans = 3×1 cell array
    'blue'
    'pink'
    'red'
```

The three categories are in alphabetical order.

Merge the categories `red` and `pink` into the category `red`. Specify `red` first in `oldcats` to use it as the merged category.

```
oldcats = {'red','pink'};
B = mergecats(A,oldcats)
```

```
B = 6×1 categorical array
     red
     blue
     red
     red
     blue
     red
```

`mergecats` replaces the value `pink` from `A(3)` with `red`.

Display the categories of `B`.

```
categories(B)
```

```
ans = 2×1 cell array
    'blue'
    'red'
```

`B` has two categories instead of three.

Merge Alphabetically Listed Categories

Create a categorical array containing various items.

```
A = categorical({'shirt' 'pants'; 'shoes' 'shirt'; 'dress' 'belt'})
```

```
A = 3×2 categorical array
```

```
     shirt      pants
     shoes      shirt
     dress      belt
```

Display the categories of A.

```
categories(A)
```

```
ans = 5×1 cell array
    'belt'
    'dress'
    'pants'
    'shirt'
    'shoes'
```

The five categories are in alphabetical order.

Merge the categories `belt` and `shoes` into a new category called `other`.

```
B = mergecats(A,{'belt' 'shoes'},'other')
```

```
B = 3×2 categorical array
     shirt      pants
     other      shirt
     dress      other
```

The value `other` replaces all instances of `belt` and `shoes`.

Display the categories of B.

```
categories(B)
```

```
ans = 4×1 cell array
    'other'
    'dress'
    'pants'
    'shirt'
```

B has four categories and the order is no longer alphabetical. `other` appears in place of `belt`.

Merge Categories of Ordinal Categorical Array

Create an ordinal categorical array.

```
A = categorical([1 2 3 2 1],1:3,{'poor','fair','good'},'Ordinal',true)
```

```
A = 1×5 categorical array
     poor      fair      good      fair      poor
```

Display the categories of A.

```
categories(A)
```

```
ans = 3×1 cell array
    'poor'
    'fair'
    'good'
```

Since A is ordinal, the categories have the mathematical ordering `poor < fair < good`.

Consider all `fair` or `poor` values to be `bad`. Since A is ordinal, the categories to merge must be consecutive.

```
B = mergecats(A,{'fair' 'poor'},'bad')
```

```
B = 1×5 categorical array
     bad       bad       good      bad       bad
```

The value `bad` replaces all instances of `fair` and `poor`.

Display the categories of B.

```
categories(B)
```

```
ans = 2×1 cell array
    'bad'
    'good'
```

B has two categories with the mathematical ordering: `bad < good`.

Input Arguments

A — Categorical array
vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

`oldcats` — Categories to merge
cell array of character vectors

Categories to merge, specified as a cell array of character vectors. If A is ordinal, the categories to merge must be consecutive.

`newcat` — New category
`oldcats(1)` (default) | character vector

New category, specified as a character vector.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also
`addcats` | `categories` | `iscategory` | `removecats` | `renamecats` | `reordercats` | `setcats`

Introduced in R2013b

mesh

Mesh plot



Syntax

```
mesh(X,Y,Z)
mesh(Z)
mesh(...,C)
mesh(...,'PropertyName',PropertyValue,...)
mesh(axes_handles,...)
h = mesh(...)
```

Description

`mesh(X,Y,Z)` draws a wireframe mesh with color determined by `Z`, so color is proportional to surface height. If `X` and `Y` are vectors, `length(X) = n` and `length(Y) = m`, where `[m,n] = size(Z)`. In this case, ($X(j)$, $Y(i)$, $Z(i,j)$) are the intersections of the wireframe grid lines; `X` and `Y` correspond to the columns and rows of `Z`, respectively. If `X` and `Y` are matrices, ($X(i,j)$, $Y(i,j)$, $Z(i,j)$) are the intersections of the wireframe grid lines. The values in `X`, `Y`, or `Z` can be numeric, datetime, duration, or categorical values.

`mesh(Z)` draws a wireframe mesh using `X = 1:n` and `Y = 1:m`, where `[m,n] = size(Z)`. The height, `Z`, is a single-valued function defined over a rectangular grid. Color is proportional to surface height. The values in `Z` can be numeric, datetime, duration, or categorical values.

`mesh(...,C)` draws a wireframe mesh with color determined by matrix `C`. MATLAB performs a linear transformation on the data in `C` to obtain colors from the current colormap. If `X`, `Y`, and `Z` are matrices, they must be the same size as `C`.

`mesh(...,'PropertyName',PropertyValue,...)` sets the value of the specified surface property. Multiple property values can be set with a single statement.

`mesh(axes_handles,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = mesh(...)` returns a handle to a Chart Surface Properties graphics object.

Examples

Create Mesh Plot of Sinc Function

Create a mesh plot of the sinc function, $z = \sin(r)/r$.

```
[X,Y] = meshgrid(-8:.5:8);
R = sqrt(X.^2 + Y.^2) + eps;
Z = sin(R)./R;

figure
mesh(Z)
```

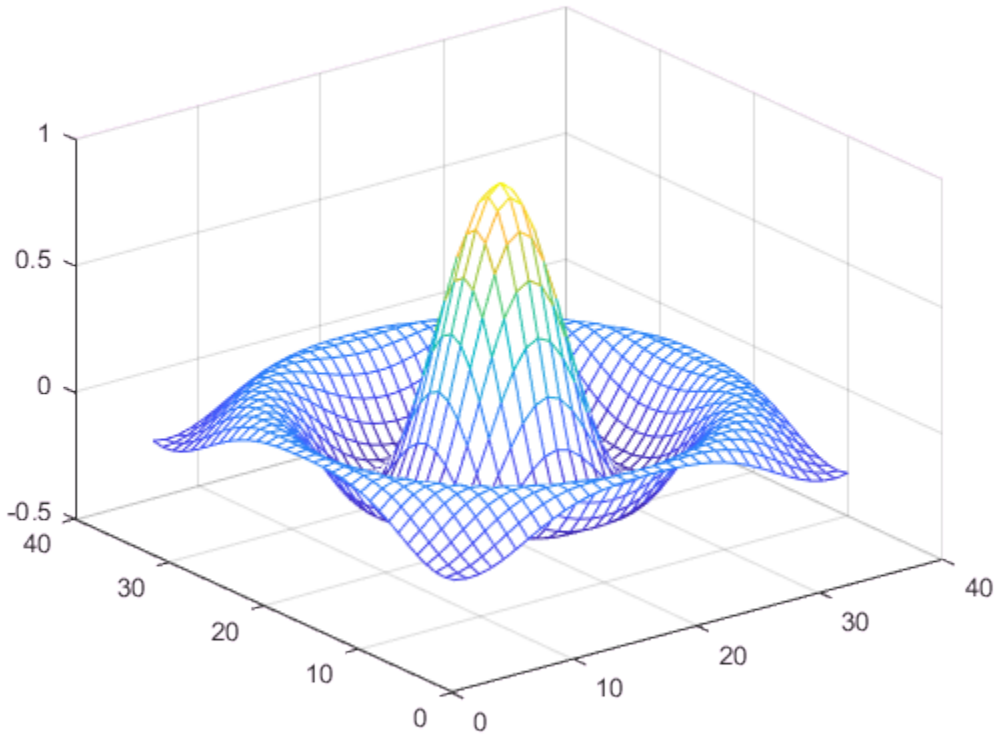

Specify Color for Mesh Plot

Specify a color matrix for a mesh plot.

```
[X,Y] = meshgrid(-8:.5:8);
R = sqrt(X.^2 + Y.^2) + eps;
Z = sin(R)./R;
C = gradient(Z);

figure
mesh(X,Y,Z,C)
```

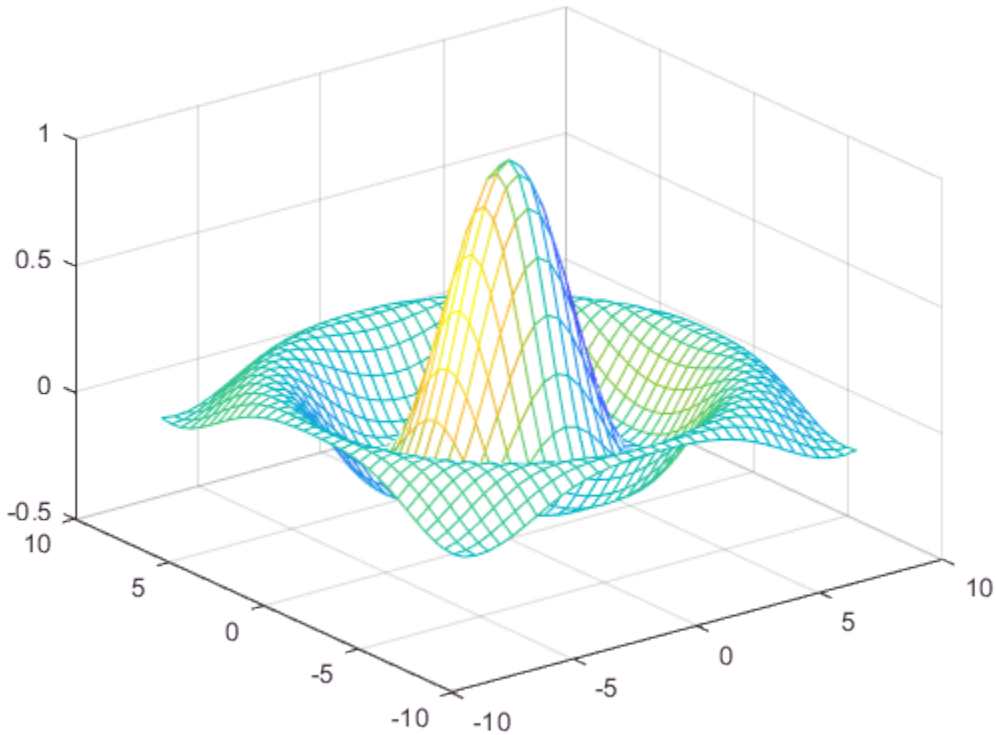

Change Lighting and Line Width for Mesh Plot

Change the lighting and the line width for a mesh plot using `Name,Value` pair arguments.

```
[X,Y] = meshgrid(-8:.5:8);
R = sqrt(X.^2 + Y.^2) + eps;
Z = sin(R)./R;
C = del2(Z);

figure
mesh(X,Y,Z,C,'FaceLighting','gouraud','LineWidth',0.3)
```

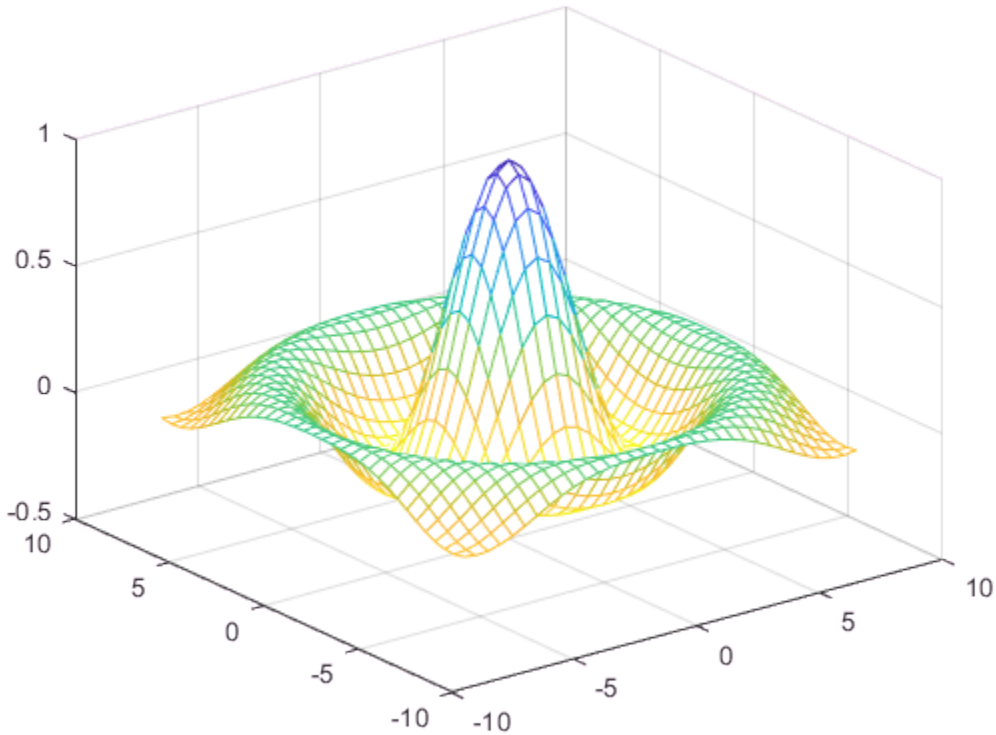

- "Plot Dates and Durations"
- "Plot Categorical Data"

Tips

`mesh` does not accept complex inputs.

A mesh is drawn as a `Surfaceplot` graphics object with the viewpoint specified by `view(3)`. The face color is the same as the background color (to simulate a wireframe with hidden-surface elimination), or `none` when drawing a standard see-through

wireframe. The current colormap determines the edge color. The `hidden` command controls the simulation of hidden-surface elimination in the mesh, and the `shading` command controls the shading model.

See Also

See Also

Functions

`axis` | `colormap` | `griddata` | `hidden` | `hold` | `meshc` | `meshgrid` | `meshz` | `scatteredInterpolant` | `shading` | `surf` | `surface` | `view` | `waterfall`

Properties

Chart Surface Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"
"Representing Data as a Surface"

Introduced before R2006a

meshc

Plot a contour graph under mesh graph



Syntax

```
meshc(X,Y,Z)
meshc(Z)
meshc(...,C)
meshc(axes_handles,...)
h = meshc(...)
```

Description

`meshc(X,Y,Z)` draws a wireframe mesh and a contour plot under it with color determined by `Z`, so color is proportional to surface height. If `X` and `Y` are vectors, `length(X) = n` and `length(Y) = m`, where `[m,n] = size(Z)`. In this case, ($X(j)$, $Y(i)$, $Z(i,j)$) are the intersections of the wireframe grid lines; `X` and `Y` correspond to the columns and rows of `Z`, respectively. If `X` and `Y` are matrices, ($X(i,j)$, $Y(i,j)$, $Z(i,j)$) are the intersections of the wireframe grid lines.

`meshc(Z)` draws a contour plot under wireframe mesh using `X = 1:n` and `Y = 1:m`, where `[m,n] = size(Z)`. The height, `Z`, is a single-valued function defined over a rectangular grid. Color is proportional to surface height.

`meshc(...,C)` draws a `meshc` graph with color determined by matrix `C`. MATLAB performs a linear transformation on the data in `C` to obtain colors from the current colormap. If `X`, `Y`, and `Z` are matrices, they must be the same size as `C`.

`meshc(axes_handles,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = meshc(...)` returns handles to the Chart Surface Properties and Contour Properties graphics object.

Examples

Display Contour Plot Under Mesh Plot

Use `meshc` to display a combination of a mesh plot and a contour plot of the `peaks` function.

```
figure
[X,Y] = meshgrid(-3:.125:3);
Z = peaks(X,Y);
meshc(Z)
```

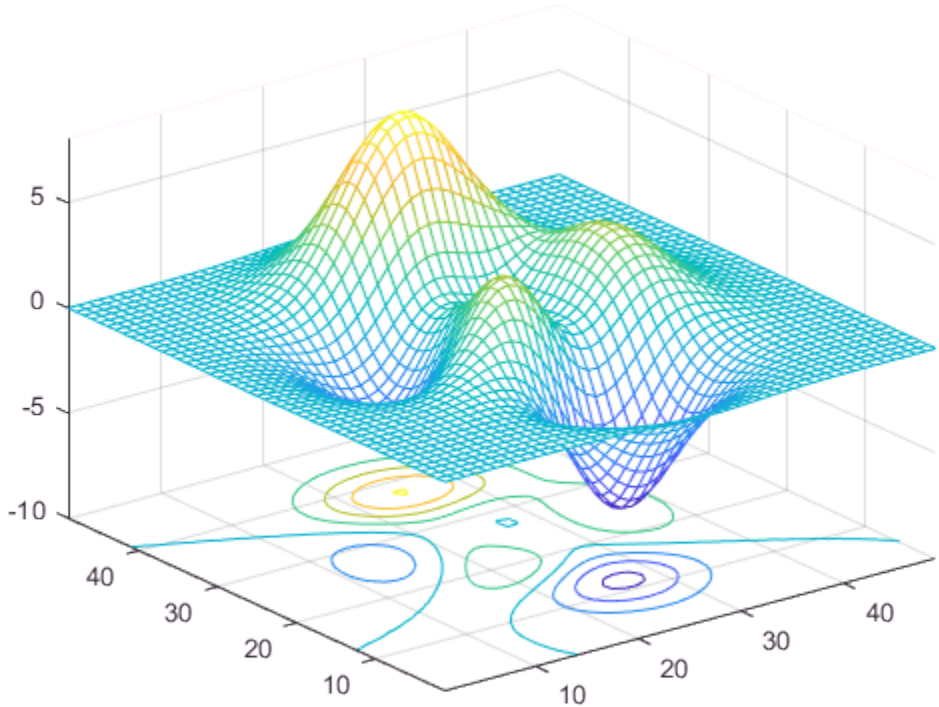

Tips

`meshc` does not accept complex inputs.

A mesh is drawn as a `Surfaceplot` graphics object with the viewpoint specified by `view(3)`. The face color is the same as the background color (to simulate a wireframe with hidden-surface elimination), or `none` when drawing a standard see-through wireframe. The current colormap determines the edge color. The `hidden` command controls the simulation of hidden-surface elimination in the mesh, and the `shading` command controls the shading model.

Algorithms

The range of `X`, `Y`, and `Z`, or the current settings of the axes XLimMode, YLimMode, and ZLimMode properties, determine the axis limits. `axis` sets these properties.

The range of `C`, or the current settings of the axes CLim and CLimMode properties (also set by the `caxis` function), determine the color scaling. Use the scaled color values are used as indices into the current colormap.

The mesh rendering functions produce color values by mapping the *z* data values (or an explicit color array) onto the current colormap. The MATLAB default behavior is to compute the color limits automatically using the minimum and maximum data values (also set using `caxis auto`). The minimum data value maps to the first color value in the colormap and the maximum data value maps to the last color value in the colormap. MATLAB performs a linear transformation on the intermediate values to map them to the current colormap.

`meshc` calls `mesh`, turns `hold` on, and then calls `contour` and positions the contour on the *x*-*y* plane. For additional control over the appearance of the contours, issue these commands directly. You can combine other types of graphs in this manner, for example `surf` and `pcolor` plots.

`meshc` assumes that `X` and `Y` are monotonically increasing. If `X` or `Y` is irregularly spaced, `contour3` calculates contours using a regularly spaced contour grid, and then it transforms the data to `X` or `Y`.

See Also

See Also

Functions

`axis` | `caxis` | `colormap` | `contour` | `hidden` | `hold` | `mesh` | `meshgrid` | `meshz` | `shading` | `surf` | `surface` | `surfc` | `surfl` | `view` | `waterfall`

Properties

Chart Surface Properties | Contour Properties

Introduced before R2006a

meshz

Plot a curtain around mesh plot



Syntax

```
meshz(X,Y,Z)
meshz(Z)
meshz(...,C)
meshz(axes_handles,...)
h = meshz(...)
```

Description

`meshz(X,Y,Z)` draws a curtain around the wireframe mesh with color determined by `Z`, so color is proportional to surface height. If `X` and `Y` are vectors, `length(X) = n` and `length(Y) = m`, where `[m,n] = size(Z)`. In this case, ($X(j)$, $Y(i)$, $Z(i,j)$) are the intersections of the wireframe grid lines; `X` and `Y` correspond to the columns and rows of `Z`, respectively. If `X` and `Y` are matrices, ($X(i,j)$, $Y(i,j)$, $Z(i,j)$) are the intersections of the wireframe grid lines.

`meshz(Z)` draws a curtain around the wireframe mesh using `X = 1:n` and `Y = 1:m`, where `[m,n] = size(Z)`. The height, `Z`, is a single-valued function defined over a rectangular grid. Color is proportional to surface height.

`meshz(...,C)` draws a `meshz` graph with color determined by matrix `C`. MATLAB performs a linear transformation on the data in `C` to obtain colors from the current colormap. If `X`, `Y`, and `Z` are matrices, they must be the same size as `C`.

`meshz(axes_handles,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = meshz(...)` returns a handle to a Chart Surface Properties graphics object.

Examples

Curtain Plot of Peaks Function

Generate a curtain plot of the `peaks` function using `meshz`.

```
figure
[X,Y] = meshgrid(-3:.125:3);
Z = peaks(X,Y);
meshz(Z)
```

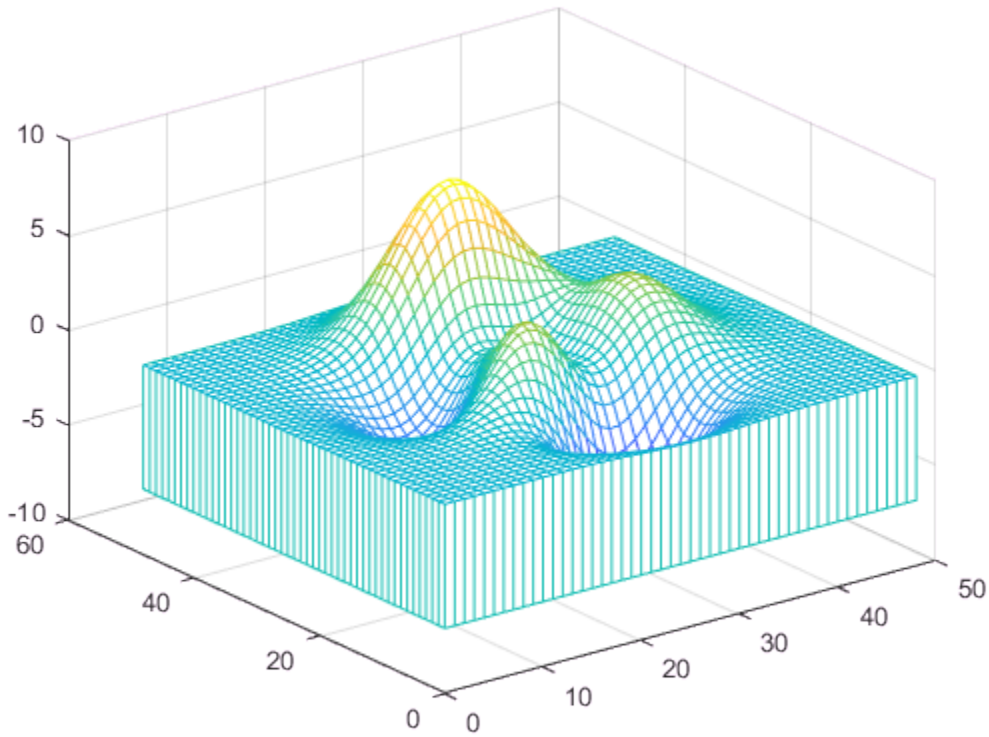

Specify Color for Curtain Plot

Specify a color matrix for a curtain plot.

```
[X,Y] = meshgrid(-3:.125:3);
Z = peaks(X,Y);
C = gradient(Z);

figure
meshz(X,Y,Z,C)
```

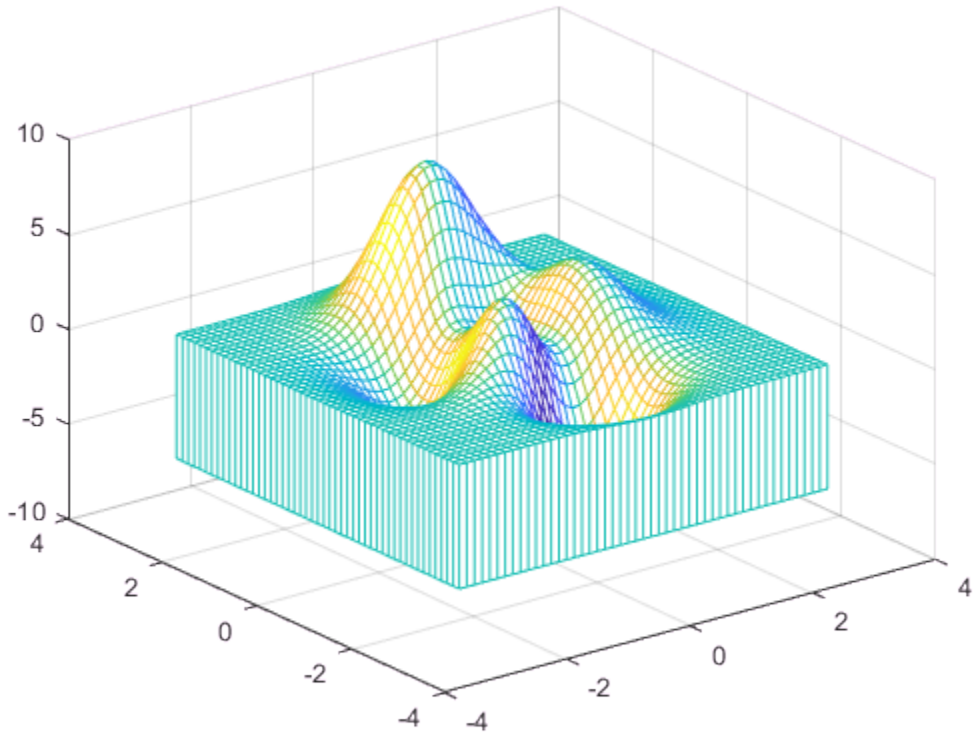

Tips

`meshz` does not accept complex inputs.

A mesh is drawn as a chart surface graphics object with the viewpoint specified by `view(3)`. The face color is the same as the background color (to simulate a wireframe with hidden-surface elimination), or `none` when drawing a standard see-through wireframe. The current colormap determines the edge color. The `hidden` command controls the simulation of hidden-surface elimination in the mesh, and the `shading` command controls the shading model.

See Also

See Also

Functions

`axis` | `caxis` | `colormap` | `contour` | `hidden` | `hold` | `mesh` | `meshc` | `meshgrid` | `shading` | `surf` | `surface` | `surfc` | `surfl` | `view` | `waterfall`

Properties

Chart Surface Properties

Introduced before R2006a

meshgrid

2-D and 3-D grids

Syntax

```
[X,Y] = meshgrid(x,y)
[X,Y] = meshgrid(x)

[X,Y,Z] = meshgrid(x,y,z)
[X,Y,Z] = meshgrid(x)
```

Description

`[X,Y] = meshgrid(x,y)` returns 2-D grid coordinates based on the coordinates contained in vectors `x` and `y`. `X` is a matrix where each row is a copy of `x`, and `Y` is a matrix where each column is a copy of `y`. The grid represented by the coordinates `X` and `Y` has `length(y)` rows and `length(x)` columns.

`[X,Y] = meshgrid(x)` is the same as `[X,Y] = meshgrid(x,x)`, returning square grid coordinates with grid size `length(x)`-by-`length(x)`.

`[X,Y,Z] = meshgrid(x,y,z)` returns 3-D grid coordinates defined by the vectors `x`, `y`, and `z`. The grid represented by `X`, `Y`, and `Z` has size `length(y)`-by-`length(x)`-by-`length(z)`.

`[X,Y,Z] = meshgrid(x)` is the same as `[X,Y,Z] = meshgrid(x,x,x)`, returning 3-D grid coordinates with grid size `length(x)`-by-`length(x)`-by-`length(x)`.

Examples

2-D Grid

Create 2-D grid coordinates with *x*-coordinates defined by the vector `x` and *y*-coordinates defined by the vector `y`.

```
x = 1:3;
y = 1:5;
[X,Y] = meshgrid(x,y)
```

```
X =

     1     2     3
     1     2     3
     1     2     3
     1     2     3
     1     2     3


Y =

     1     1     1
     2     2     2
     3     3     3
     4     4     4
     5     5     5
```

Evaluate the expression $x^2 + y^2$ over the 2-D grid.

```
X.^2 + Y.^2
```

```
ans =

     2     5    10
     5     8    13
    10    13    18
    17    20    25
    26    29    34
```

Plot Surface

Create a 2-D grid with uniformily spaced *x*-coordinates and *y*-coordinates in the interval [-2,2].

```
x = -2:0.25:2;
y = x;
[X,Y] = meshgrid(x);
```

Evaluate and plot the function $f(x, y) = xe^{-x^2-y^2}$ over the 2-D grid.

```
F = X.*exp(-X.^2-Y.^2);
surf(X,Y,F)
```

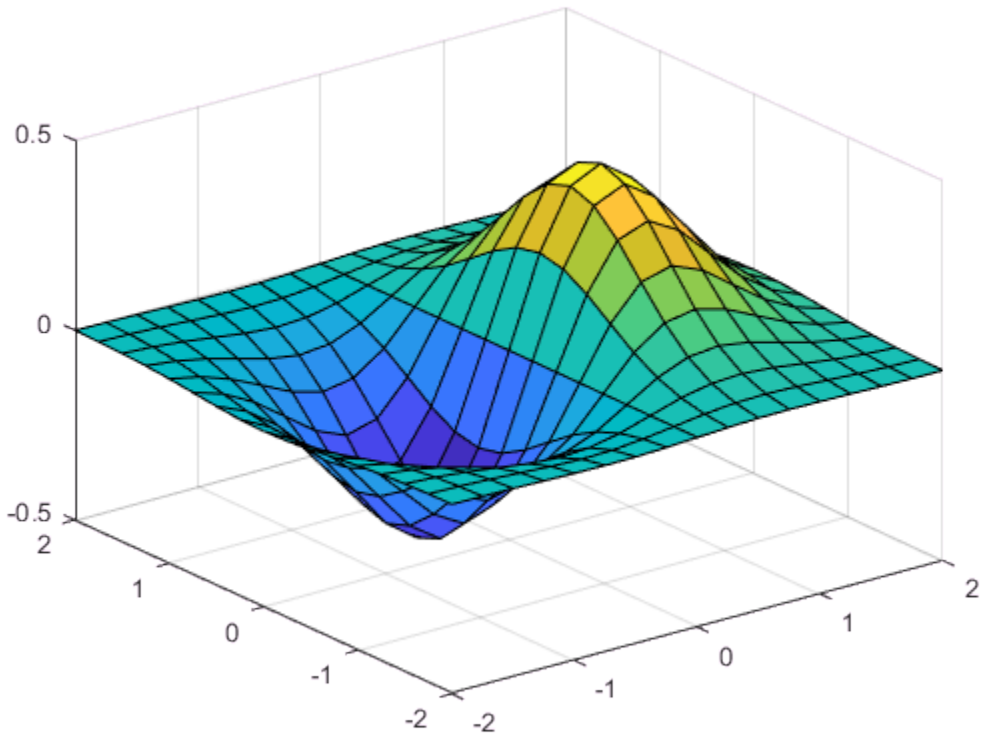

Starting in R2016b, it is not always necessary to create the grid before operating over it.

For example, computing the expression $xe^{-x^2-y^2}$ implicitly expands the vectors `x` and `y`. For more information on implicit expansion, see “Array vs. Matrix Operations”.

```
surf(x,y,x.*exp(-x.^2-(y').^2))
```

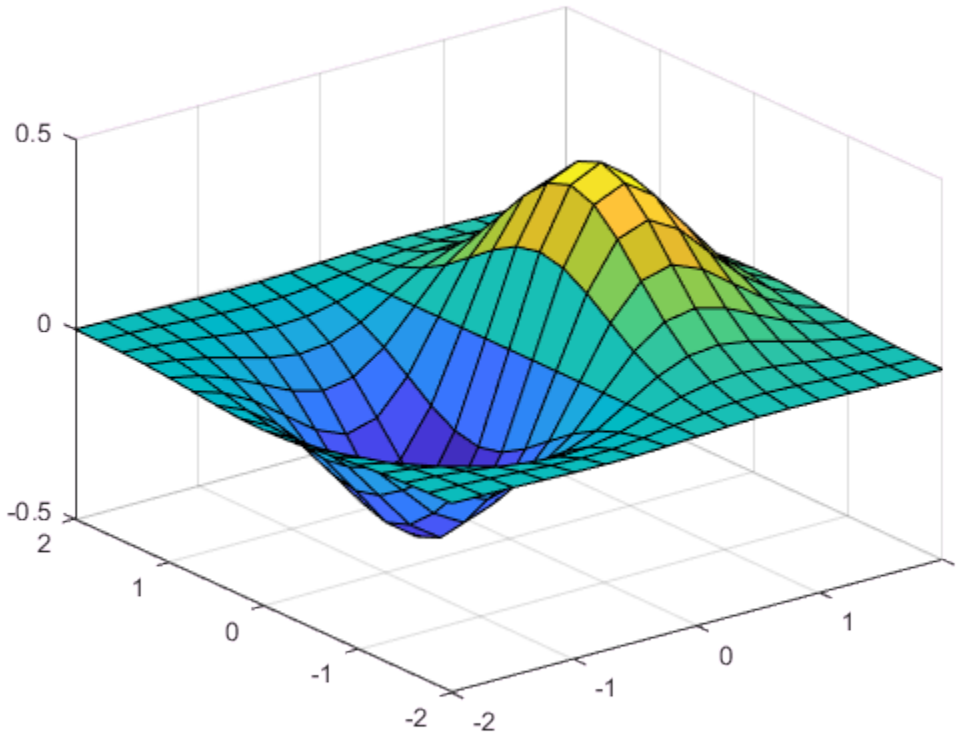

3-D Grid

Create 3-D grid coordinates from x-, y-, and z-coordinates defined in the interval [0,6], and evaluate the expression $x^2 + y^2 + z^2$.

```
x = 0:2:6;
y = 0:1:6;
z = 0:3:6;
[X,Y,Z] = meshgrid(x,y,z);
F = X.^2 + Y.^2 + Z.^2;
```

Determine the size of the grid. The three coordinate vectors have different lengths, forming a rectangular box of grid points.

```
gridsize = size(F)
```

```
gridsize =

     7     4     3
```

Use the single-input syntax to generate a uniformly spaced 3-D grid based on the coordinates defined in `x`. The new grid forms a cube of grid points.

```
[X,Y,Z] = meshgrid(x);
G = X.^2 + Y.^2 + Z.^2;
gridsize = size(G)
```

```
gridsize =

     4     4     4
```

- "Interpolating Gridded Data"

Input Arguments

x — x-coordinates of points

vector

x-coordinates of points, specified as a vector.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

y — y-coordinates of points

vector

y-coordinates of points, specified as a vector.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

z — z-coordinates of points

vector

z-coordinates of points, specified as a vector.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`X` — x-coordinates over grid
2-D or 3-D array

x-coordinates over a grid, specified as a 2-D (two inputs) or 3-D array (three inputs).

`Y` — y-coordinates over grid
2-D or 3-D array

y-coordinates over a grid, specified as a 2-D (two inputs) or 3-D array (three inputs).

`Z` — z-coordinates over grid
3-D array

z-coordinates over a grid, specified as a 3-D array.

Tips

- For additional information on creating multidimensional grids, see “Grid Representation”.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`griddedInterpolant` | `mesh` | `ndgrid` | `surf`

Topics

"Interpolating Gridded Data"

Introduced before R2006a

meta.class

Describe MATLAB class

Description

Instances of the `meta.class` class contains information about MATLAB classes. The read/write properties of the `meta.class` class correspond to class attributes and are set only from within class definitions on the `classdef` line. You can query the read–only properties of the `meta.class` object to obtain information that is specified syntactically by the class (for example, to obtain the name of the class).

You cannot instantiate a `meta.class` object directly. You can construct a `meta.class` object from an instance of a class or using the class name:

- `metaclass` — returns a `meta.class` object representing the object passed as an argument.
- `?`*`ClassName`* — returns a `meta.class` object representing the named class.
- `fromName` — static method returns a `meta.class` object representing the named class.

For example, the `metaclass` function returns the `meta.class` object representing `MyClass`.

```
ob = MyClass;
obmeta = metaclass(ob);
obmeta.Name
```

```
ans =
MyClass
```

You can use the class name to obtain the `meta.class` object:

```
obmeta = ?MyClass;
```

You can also use the `fromName` static method:

```
obmeta = meta.class.fromName('MyClass');
```

Properties

Property	Purpose
`Abstract` attribute, default = `false`	If `true`, this class is an abstract class (cannot be instantiated). For more information, see "Abstract Classes".
`AllowedSubclasses` attribute, write only from `classdef` statement	List classes that can subclass this class. Specify subclasses as `meta.class` objects in the form: • A single `meta.class` object • A cell array of `meta.class` objects Specify `meta.class` objects using the `?ClassName` syntax only. See "Specify Allowed Subclasses".
`ConstructOnLoad` attribute, default = `false`	If `true`, MATLAB calls the class constructor automatically when loading an object from a MAT-file. Therefore, the construction must be implemented so that calling it with no arguments does not produce an error. See "Save and Load Process for Objects"
`ContainingPackage` read only	A `meta.package` object describing the package within which this class is contained, or an empty object if this class is not in a package. See "Packages Create Namespaces".
`Description` read only	This property holds the first comment line following a `classdef` keyword in a MATLAB `char` array
`DetailedDescription` read only	This property holds the comment lines immediately following a `classdef` keyword up until the first line that does not begin with a comment. The lines are in a 1-by-n MATLAB `char` array with newline characters separating lines.
`Enumeration` attribute, default = `false`	If `true`, this class is an enumeration class. See "Define Enumeration Classes".

Property	Purpose
`EventList` read only	An array of `meta.event` objects describing each event defined by this class, including all inherited events. See “Events”.
`Events` read only Use `EventList` instead	A cell array of `meta.event` objects describing each event defined by this class, including all inherited events.
`EnumerationMemberList`	An array of `meta.EnumeratedValue` objects describing the member names defined by an enumeration class. See “Enumerations” for more information on enumeration classes.
`EnumeratedValues` read only Use `EnumeratedMemberList` instead	A cell array of `meta.EnumeratedValue` objects describing the member names defined by an enumeration class. See “Enumerations” for more information on enumeration classes.
`Hidden` attribute, default = `false`	If set to `true`, the class does not appear in the output of MATLAB commands or tools that display class names.
`InferiorClasses` attribute, default = `{}`	A cell array of `meta.class` objects defining the precedence of classes represented by the list as inferior to this class. See “Class Precedence”
`MethodList` read only	An array of `meta.method` objects describing each method defined by this class, including all inherited public and protected methods. See “Methods in Class Design”.
`Methods` read only Use `MethodList` instead	A cell array of `meta.method` objects describing each method defined by this class, including all inherited public and protected methods.
`Name` read only	Name of the class associated with this `meta.class` object (`char` array)

Property	Purpose
`PropertyList` read only	An array of `meta.property` objects describing each property defined by this class, including all inherited public and protected properties. See “Properties”.
`Properties` read only Use `PropertyList` instead	A cell array of `meta.property` objects describing each property defined by this class, including all inherited public and protected properties. See “Properties”.
`RestrictsSubclassing` read only	If the class is not `Sealed` and has an empty list of `AllowedSubclasses`, this property is set to `false`. If the class is `Sealed`or specifies any `AllowedSubclasses`, this property is set to `true`. See “Specify Allowed Subclasses”.
`Sealed` attribute, default = `false`	If `true`, the class cannot be subclassed.
`SuperClassList` read only	An array of `meta.class` objects describing each direct superclass from which this class is derived. See “Subclass Constructors”.
`SuperClasses` read only Use `SuperClassList` instead	A cell array of `meta.class` objects describing each direct superclass from which this class is derived.

Methods

Method	Purpose
`fromName`	Returns the `meta.class` object associated with the specified class name.
`tf = eq(Cls)`	Equality function (`a == b`). Use to test if two variables refer to equal classes (classes that contain exactly the same list of elements).

Method	Purpose
`tf = ne(Cls)`	Not equal function (`a ~= b`). Use to test if two variables refer to different meta–classes.
`tf = lt(ClsA,ClsB)`	Less than function (`ClsA < ClsB`). Use to determine if `ClsA` is a strict subclass of `ClsB` (i.e., a strict subclass means `ClsX < ClsX` is `false`).
`tf = le(ClsA,ClsB)`	Less than or equal to function (`ClsA <= ClsB`). Use to determine if `ClsA` is a subclass of `ClsB`.
`tf = gt(ClsA,ClsB)`	Greater than function (`ClsA > ClsB`). Use to determine if `ClsA` is a strict superclass of `ClsB` (i.e., a strict superclass means `ClsX > ClsX` is `false`).
`tf = ge(ClsA,ClsB)`	Greater than or equal to function (`ClsA >= ClsB`). Use to determine if `ClsA` is a superclass of `ClsB`.

Events

Event	Purpose
`InstanceCreated`	If the class is a handle class, this event occurs every time a new instance of this handle class is created, including new instances of any subclasses. The event occurs immediately after all constructor functions finish executing.
`InstanceDestroyed`	If the class is a handle class, this event occurs every time an instance of this handle class is destroyed, including all subclasses. The event occurs immediately before any destructor functions execute.

Examples

Find property attributes using the `handle` class `findobj` method and the `audioplayer` `meta.class` object. Determine if a class defines the property named `SampleRate` and does it have public set access.

```
mc = ?audioplayer;
mp = findobj(mc.PropertyList,'Name','SampleRate');
strcmp(mp.SetAccess,'public')
```

...

See Also

`fromName` | `meta.property` | `meta.method` | `meta.event` | `meta.package`

Topics

"Class Metadata"

meta.class.fromName

Return `meta.class` object associated with named class

Syntax

```
mcls = meta.class.fromName('ClassName')
```

Description

`mcls = meta.class.fromName('ClassName')` is a static method that returns the `meta.class` object associated with the class *`ClassName`*. Note that you can also use the `?` operator to obtain the `meta.class` object for a class name:

```
mcls = ?ClassName;
```

The equivalent call to `meta.class.fromName` is:

```
mcls = meta.class.fromName('ClassName');
```

Use `meta.class.fromName` when using a `char` variable for the class name:

```
function mcls = getMetaClass(clname)
   % Do error checking
   mcls = meta.class.fromName(clname);
   ...
end
```

See Also

`meta.class`

meta.DynamicProperty

Describe dynamic property of MATLAB object

Description

The `meta.DynamicProperty` class contains descriptive information about dynamic properties that you have added to an instance of a MATLAB classes. The MATLAB class must be a subclass of `dynamicprops`. The properties of the `meta.DynamicProperty` class correspond to property attributes that you specify from within class definitions. Dynamic properties are not defined in `classdef` blocks, but you can set their attributes by setting the `meta.DynamicProperty` object properties.

You add a dynamic property to an object using the `addprop` method of the `dynamicprops` class. The `addprop` method returns a `meta.DynamicProperty` instance representing the new dynamic property. You can modify the properties of the `meta.DynamicProperty` object to set the attributes of the dynamic property or to add set and get access methods, which would be defined in the `classdef` for regular properties.

You cannot instantiate the `meta.DynamicProperty` class. You must use `addprop` to obtain a `meta.DynamicProperty` object.

To remove the dynamic property, call the `delete` handle class method on the `meta.DynamicProperty` object.

The `dynamicprops` addprop method returns an array of `meta.DynamicProperty` objects, one for each dynamic property added.

See “Dynamic Properties — Adding Properties to an Instance” for more information.

Properties

Property	Purpose
`Name`	Name of the property.
`Description`	Currently not used
`DetailedDescription`	Currently not used

Property	Purpose
`AbortSet`	If `true`, then MATLAB does not set the property value if the new value is the same as the current value. This approach prevents the triggering of property `PreSet` and `PostSet` events.
`Abstract` attribute, default = `false`	If `true`, the property has no implementation, but a concrete subclass must redefine this property without `Abstract` being set to `true`. • Abstract properties cannot define set or get access methods. See "Property Access Methods" • Abstract properties cannot define initial values. "Assigning a Default Value" • All subclasses must specify the same values as the superclass for the property `SetAccess` and `GetAccess` attributes. • `Abstract=true` should be used with the class attribute `Sealed=false` (the default).
`Access`	`public` – unrestricted access `protected` – access from class or subclasses `private` – access by class members only (not subclasses) List of classes that have get and set access to this property. Specify classes as `meta.class` objects in the form: • A single `meta.class` object • A cell array of `meta.class` objects. An empty cell array, `{}`, is the same as `private` access. Use `Access` to set both `SetAccess` and `GetAccess` to the same value. Query the values of `SetAccess` and `GetAccess` directly (not `Access`).
`Constant` attribute, default = `false`	Setting the `Constant` attribute of a dynamic property is not allowed. Dynamic properties cannot be constant.

Property	Purpose
`DefaultValue`	Querying this property returns an error because dynamic properties cannot define default values.
`DefiningClass`	The `meta.class` object representing the class that defines this property.
`GetAccess` attribute, default = `public`	`public` – unrestricted access `protected` – access from class or subclasses `private` – access by class members only
`SetAccess` attribute, default = `public`	`public` – unrestricted access `protected` – access from class or subclasses `private` – access by class members only
`Dependent` attribute, default = `false`	If `false`, property value is stored in object. If `true`, property value is not stored in object and the set and get functions cannot access the property by indexing into the object using the property name. See “Property Get Methods”
`Transient` attribute, default = `false`	If `true`, property value is not saved when object is saved to a file. See “Save and Load Process for Objects” for more about saving objects.
`Hidden` attribute, default = `false`	Determines whether the property should be shown in a property list (e.g., Property Inspector, call to `properties`, etc.).
`NonCopyable` default = `false`	Determines if dynamic property should be copied when object is copied. By default, dynamic properties are not copied. For more information, see “Exclude Properties from Copy”
`GetObservable` attribute, default = `false`	If `true`, then listeners can be created for access to this property. The listeners are called whenever property values are queried. See “Property-Set and Query Events”

Property	Purpose
`SetObservable` attribute, default = `false`	If `true`, then listeners can be created for access to this property. The listeners are called whenever property values are modified. See “Property-Set and Query Events”
`GetMethod`	Function handle of the get method associated with this property. Empty if there is no get method specified. See “Get Method Syntax”
`SetMethod`	Function handle of the set method associated with this property. Empty if there is no set method specified. See “Property Set Methods”
`HasDefault`	Always `false`. Dynamic properties cannot define default values.

Events

See “Listen for Changes to Property Values” for information on using property events.

Event Name	Purpose
`PreGet`	Event occurs just before property is queried.
`PostGet`	Event occurs just after property has been queried
`PreSet`	Event occurs just before this property is modified
`PostSet`	Event occurs just after this property has been modified
`ObjectBeingDestroyed`	Inherited from handle

See Also

`addprop` | handle

meta.EnumeratedValue

Describe enumeration member of MATLAB class

Description

The `meta.EnumeratedValue` class contains information about enumeration members defined by MATLAB classes. The properties of a `meta.EnumeratedValue` object correspond to the attributes of the enumeration member being described.

All `meta.EnumeratedValue` properties are read-only. Query the `meta.EnumeratedValue` object to obtain information about the enumeration member it describes.

Obtain a `meta.EnumeratedValue` object from the `EnumerationMemberList` property of the `meta.class` object. `EnumerationMemberList` is an array of `Meta.EnumeratedValue` instances, one per enumeration member.

The `meta.EnumeratedValue` class is a subclass of the handle class.

Example

To access the `meta.EnumeratedValue` objects for a class, first create a `meta.class` object for that class. For example, give the following `OnOff` class definition:

```
classdef OnOff < logical
   enumeration
      On (true)
      Off (false)
   end
end
```

Obtain a `meta.EnumeratedValue` object from the `EnumerationMemberList` property of the `meta.class` object:

```
% Obtain the meta.class instance for the OnOff class
mc = ?OnOff;
% Get the array of EnumerateValue objects
enumList = mc.EnumerationMemberList;
% Access the Name property of the first object in the array
```

```
enumList(1).Name =
ans =
On
```

Properties

Property	Purpose
`Name` read-only	Name of the enumeration member associated with this `meta.EnumeratedValue` object
`Description` read-only	This property holds the first comment line following an enumeration name inside an enumeration block.
`DetailedDescription` read-only	This property holds the comment lines immediately following an enumeration definition up to the first line that does not begin with a comment. The lines are in a 1-by-n MATLAB `char` array with newline characters separating lines.

Methods

See the handle superclass for inherited methods.

Events

See the handle superclass for inherited events.

See Also

`meta.property` | `meta.event` | `meta.class` | `meta.method`

Topics

"Define Enumeration Classes"
"Class Metadata"

meta.event

Describe event of MATLAB class

Description

The `meta.event` class provides information about MATLAB class events. The read/write properties of the `meta.event` class correspond to event attributes and are specified only from within class definitions.

You can query the read-only properties of the `meta.event` object to obtain information that is specified syntactically by the class (for example, to obtain the name of the class defining the event).

You cannot instantiate a `meta.event` object directly. Obtain a `meta.event` object from the `meta.class` `EventList` property, which contains an array of `meta.event` objects, one for each event defined by the class. For example, replace *`ClassName`* with the name of the class whose events you want to query:

```
mco = ?ClassName;
elist = mco.EventList;
elist(1).Name; % name of first event in list
```

Use the `metaclass` function to obtain a `meta.class` object from a class instance:

```
mco = metaclass(obj);
```

Properties

Property	Purpose
`Name` read-only	Name of the event.
`Description` read-only	This property holds the first comment line following an event name inside an events block.
`DetailedDescription` read-only	This property holds the comment lines immediately following an event definition up to the first line that does not begin with a comment. The lines are in a 1-by-n MATLAB `char` array with newline characters separating lines.

Property	Purpose
`Hidden`	If `true`, the event does not appear in the list of events returned by the `events` function (or other event listing functions or viewers)

`ListenAccess`	Determines where you can create listeners for the event.
	• `public` — unrestricted access
	• `protected` — access from methods in class or subclasses
	• `private` — access by class methods only (not from subclasses)
	• List classes that have listen access to this event. Specify classes as `meta.class` objects in the form:
	  • A single `meta.class` object
	  • A cell array of `meta.class` objects. An empty cell array, `{}`, is the same as `private` access.
	See "Class Members Access"

`NotifyAccess`	Determines where code can trigger the event.
	• `public` — any code can trigger event
	• `protected` — can trigger event from methods in class or subclasses
	• `private` — can trigger event by class methods only (not from subclasses)
	• List classes that have notify access to this event. Specify classes as `meta.class` objects in the form:
	  • A single `meta.class` object
	  • A cell array of `meta.class` objects. An empty cell array, `{}`, is the same as `private` access.
	See "Class Members Access"

`DefiningClass`	The `meta.class` object representing the class that defines this event.

See Also

`meta.property` | `meta.class` | `meta.method` | `metaclass`

Topics

"Events"
"Class Metadata"

meta.MetaData class

Package: meta
Superclasses: matlab.mixin.Heterogeneous

Superclass for MATLAB object metadata

Description

The `meta.MetaData` class of objects represent MATLAB class definitions and the constituent parts of those definitions, such as properties and methods. Metadata enable a program to get information about a class definition.

The `meta.MetaData` class forms the root of the metadata class hierarchy, which enables the formation of arrays of metadata objects belonging to different specific classes.

MATLAB uses instances of the `meta.MetaData` class as the default object to fill in missing array elements.

`findobj` and `findprop`, can search the metadata hierarchy and return an array of different metadata objects. These function require the ability to form heterogeneous arrays containing various metaclass objects.

See the `matlab.mixin.Heterogeneous` class for more information on heterogeneous hierarchies.

Construction

You cannot create an instance of the `meta.MetaData` class directly. MATLAB constructs instances of this class as required.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

This example shows how the `meta.MetaData` class facilitates working with metaclasses.

Create a `meta.class` instance representing the MATLAB `timeseries` class:

```
>> mc = ?timeseries;
```

MATLAB uses `meta.MetaData` objects to fill empty array elements:

```
>> m(2) = mc
>> class(m(1))

ans =

meta.MetaData
>> class(m(2))

ans =

meta.class
```

Use `findobj` to find all properties and methods that have protected access:

```
>> protectedMembers = findobj(mc,{'Access','protected'},...
'-or',{'SetAccess','protected'},...
'-or',{'GetAccess','protected'});
```

The `timeseries` class defines both properties and methods that have protected access. Therefore, `findobj` returns a heterogeneous array of class `meta.MetaData`. This array contains both `meta.property` and `meta.method` objects.

```
>> protectedMembers

protectedMembers =

  11x1 heterogeneous meta.MetaData (meta.property, meta.method)
  handle with no properties.
  Package: meta
>> class(protectedMembers(1))

ans =

meta.property

>> protectedMembers(1).Name
```

```
ans =

Length
>> protectedMembers(1).SetAccess

ans =

protected
>> protectedMembers(1).GetAccess

ans =

public
```

See Also

handle | matlab.mixin.Heterogeneous

Topics

Class Attributes
Property Attributes
"Class Metadata"

meta.method

Describe method of MATLAB class

Description

The `meta.method` class provides information about the methods of MATLAB classes. The read/write properties of the `meta.method` class correspond to method attributes and are specified only from within class definitions.

You can query the read-only properties of the `meta.method` object to obtain information that is specified syntactically by the class (for example, to obtain the name of the class defining a method).

You cannot instantiate a `meta.method` object directly. Obtain a `meta.method` object from the `meta.class` `MethodList` property, which contains an array of `meta.method` objects, one for each class method. For example, replace *`ClassName`* with the name of the class whose methods you want to query:

```
mco = ?ClassName;
mlist = mco.MethodList;
mlist(1).Name; % name of first method in the list
```

Use the `metaclass` function to obtain a `meta.class` object from a class instance:

```
mco = metaclass(obj);
```

Properties

Property	Purpose
`Abstract`	If `true`, the method has no implementation. The method has a syntax line that can include arguments, which subclasses use when implementing the method. • Subclasses are not required to define the same number of input and output arguments. • The method can have comments after the `function` line

Property	Purpose
	• Does not contain `function` or `end` keywords, only the function syntax (e.g., `[a,b] = myMethod(x,y)`)

`Access` attribute, default = `public`	Determines what code can call this method.
	• `public` — unrestricted access
	• `protected` — access from methods in class or subclasses
	• `private` — access by class methods only (not from subclasses)
	• List classes that have access to this method. Specify classes as `meta.class` objects in the form:
	  • A single `meta.class` object
	  • A cell array of `meta.class` objects. An empty cell array, `{}`, is the same as `private` access.

`DefiningClass`	The `meta.class` object representing the class that defines this method.
`Description` read-only	This property holds the purpose comment line for a method function. This line is the first line following a function-line if the function is defined inside a methods block that is inside a class definition.
`DetailedDescription` read-only	This property holds the help comment lines for a method function. The lines are in a 1-by-n MATLAB `char` array with newline characters separating lines.
`Hidden`attribute, default = `false`	When `false`, the method name shows in the list of methods displayed using the `methods` or `methodsview` commands. If set to `true`, the method name is not included in these listings.
`InputNames`	Character vector or cell array containing the names of the input arguments used in the function signature.
`Name` read-only	Name of the method.
`OutputNames`	Character vector or cell array containing the names of the output arguments used in the function signature.

Property	Purpose
`Sealed`attribute, default = `false`	If `true`, the method cannot be redefined in a subclass. Attempting to define a method with the same name in a subclass causes an error.
`Static`attribute, default = `false`	Set to `true` to define a method that does not depend on an object of the class and does not require an object argument. Call static methods using the class name in place of the object: *`classname.methodname()`* Or with an instance of the class, like any method: `o.`*`methodname()`* See “Static Methods”

See Also

`meta.property` | `meta.class` | `meta.event` | `metaclass`

Topics

“Methods”
“Class Metadata”

meta.package

Describe MATLAB package

Description

The `meta.package` class contains information about MATLAB packages.

You cannot instantiate a `meta.package` object directly. Obtain a `meta.package` object from the `meta.class` `ContainingPackage` property, which contains a `meta.package` object, or an empty object, if the class is not in a package.

Properties

Property	Purpose
`Name`	Name of the package associated with this `meta.package` object. Read only
`Description`	Currently not used. Read only
`DetailedDescriptio`	Currently not used. Read only
`ClassList`	List of classes that are scoped to this package. An object array of `meta.class` objects. Read only
`Classes` Use `ClassList` instead	List of classes that are scoped to this package. A cell array of `meta.class` objects. Read only
`FunctionList`	List of functions that are scoped to this package. An object array of function handles. Read only
`Functions` Use `FunctionList` instead	List of functions that are scoped to this package. A cell array of function handles. Read only
`PackageList`	List of packages that are scoped to this package. An object array of `meta.package` objects. Read only

Property	Purpose
`Packages` Use `PackageList` instead	List of packages that are scoped to this package. A cell array of `meta.package` objects. Read only
`ContainingPackage`	A `meta.package` object describing the package within which this package is contained, or an empty object if this package is not nested. Read only

Methods

Method	Purpose
`fromName`	Static method returns a `meta.package` object for a specified package name.
`getAllPackages`	Static method returns a cell array of `meta.package` objects representing all top-level packages.

See Also

`meta.property` | `meta.event` | `meta.class` | `meta.method`

Topics

"Class Metadata"

meta.abstractDetails

Package: meta

Find abstract methods and properties

Syntax

```
meta.abstractDetails(ClassName)
meta.abstractDetails(mc)
absMembers = meta.abstractDetails( ___ )
```

Description

`meta.abstractDetails(ClassName)` displays a list of abstract methods and properties for the class with name `ClassName`. Use the fully specified name for classes in packages. MATLAB displays all public and protected abstract methods and properties, including those declared `Hidden`.

`meta.abstractDetails(mc)` displays a list of abstract methods and properties for the class represented by the `meta.class` object `mc`.

`absMembers = meta.abstractDetails( ___ )` returns an array of the metaclass objects corresponding to the abstract members of the class, and can include any of the input arguments in previous syntaxes. If the class has both abstract methods and abstract properties, `absMembers` is a heterogeneous array of class meta.MetaData containing `meta.method` and `meta.property` objects.

A class can be abstract without defining any abstract methods or properties if it declares the `Abstract` class attribute. In this case, `meta.abstractDetails` returns no abstract members for that class, but the class is abstract. See “Determine If a Class Is Abstract” for more information.

Input Arguments

`ClassName`

Name of the class specified as a `char` vector (for example, `'MyClass'`)

mc

`meta.class` object representing the class (for example, `?MyClass`)

Output Arguments

absMembers

Array of metaclass objects representing abstract class members

Examples

Display Abstract Member Names

Define the class, `AbsBase`, with an abstract property:

```
classdef AbsBase
   properties (Abstract)
      Prop1
   end
   methods(Abstract)
      result = methodOne(obj)
      output = methodTwo(obj)
   end
end
```

Pass the class name (`AbsBase`) as a `char` vector:

```
meta.abstractDetails('AbsBase')
```

`meta.abstractDetails` displays the names of the abstract properties and methods defined in the class `AbsBase`.

```
Abstract methods for class AbsBase:
    methodTwo   % defined in AbsBase
    methodOne   % defined in AbsBase

Abstract properties for class AbsBase:
```

```
    Prop1   % defined in AbsBase
```

Return Abstract Member Metaclass Objects

Pass a `meta.class` object representing the `AbsBase` class and return the metaclass objects for the abstract members. Use the definition of the `AbsBase` class from the previous example.

```
mc = ?AbsBase;
absMembers = meta.abstractDetails(mc);
```

`absMembers` is a heterogeneous array containing a `meta.property` object for the `Prop1` abstract property and `meta.method` objects for the `methodOne` and `methodTwo` abstract methods.

List the names of the metaclass objects.

```
for k = 1:length(absMembers)
   disp(absMembers(k).Name)
end
```

```
methodTwo
methodOne
Prop1
```

Find Inherited Abstract Members

Derive the `SubAbsBase` class from `AbsBase`, which is defined in a previous example.

```
classdef SubAbsBase < AbsBase
   properties
      SubProp = 1;
   end
   methods
      function result = methodOne(obj)
         result = obj.SubProp + 1;
      end
   end
end
```

Display the names of the abstract members inherited by `SubAbsBase`.

```
meta.abstractDetails('SubAbsBase')
```

```
Abstract methods for class SubAbsBase:
```

```
    methodTwo   % defined in AbsBase

Abstract properties for class SubAbsBase:
    Prop1   % defined in AbsBase
```

To make `SubAbsBase` a concrete class, you need to implement concrete versions of `methodTwo` and `Prop1` in the subclass.

See Also

See Also

`meta.class` | `meta.class.fromName`

Topics

"Abstract Classes"
"Class Metadata"

meta.package.fromName

Return `meta.package` object for specified package

Syntax

```
mpkg = meta.package.fromName('pkgname')
```

Description

`mpkg = meta.package.fromName('pkgname')` is a static method that returns the `meta.package` object associated with the named package. If `pkgname` is a nested package, then you must provide the fully qualified name (e.g., `'pkgname1.pkgname2'`).

Examples

List the classes in the `event` package:

```
mev = meta.package.fromName('event');
for k=1:length(mev.Classes)
   disp(mev.Classes{k}.Name)
end
event.EventData
event.PropertyEvent
event.listener
event.proplistener
```

See Also

`meta.package` | `meta.package.getAllPackages`

meta.package.getAllPackages

Get all top-level packages

Syntax

```
P = meta.package.getAllPackages
```

Description

`P = meta.package.getAllPackages` is a static method that returns a cell array of `meta.package` objects representing all the top-level packages that are visible on the MATLAB path or defined as top-level built-in packages. You can access subpackages using the `Packages` property of each `meta.package` object.

Note that the time required to find all the packages on the path might be excessively long in some cases. You should therefore avoid using this method in any code where execution time is a consideration. `getAllPackages` is generally intended for interactive use only.

See Also

`meta.package` | `meta.package.fromName`

meta.property

Describe property of MATLAB class

Description

The `meta.property` class provides information about the properties of MATLAB classes. The read/write properties of the `meta.property` class correspond to property attributes and are specified only from within your class definitions.

You can query the read-only properties of the `meta.property` object to obtain information that is specified syntactically by the class (for example, to obtain the function handle of a property set access method).

You cannot instantiate a `meta.property` object directly. Obtain a `meta.property` object from the `meta.class` `PropertyList` property, which contains an array of `meta.property` objects, one for each class property. For example, replace *`ClassName`* with the name of the class whose properties you want to query:

```
mco = ?ClassName;
plist = mco.PropertyList;
plist(1).Name; % name of first property
```

Use the `metaclass` function to obtain a `meta.class` object from a class instance:

```
mco = metaclass(obj);
```

Properties

Property	Purpose
`Name` read-only	Name of the property.
`Description` read-only	This property holds the first comment line following a property definition inside the properties block.
`DetailedDescription` read-only	This property holds the comment lines immediately following a property up to the first line that does not begin with a comment. The lines are in a 1-by-n MATLAB `char` array with newline characters separating lines.

Property	Purpose
`AbortSet` attribute, default = `false`	If `true`, and this property belongs to a handle class, then MATLAB does not set the property value if the new value is the same as the current value. This setting prevents the triggering of property `PreSet` and `PostSet` events. See "Listen for Changes to Property Values"
`Abstract` attribute, default = `false`	If `true`, the property has no implementation, but a concrete subclass must redefine this property without `Abstract` being set to `true`. • Abstract properties cannot define set or get access methods. See "Property Access Methods" • Abstract properties cannot define initial values. "Assigning a Default Value" • All subclasses must specify the same values as the superclass for the property `SetAccess` and `GetAccess` attributes. • `Abstract=true` should be used with the class attribute `Sealed=false` (the default).
`GetAccess` attribute, default = `public`	`public` – unrestricted access `protected` – access from class or subclasses `private` – access by class members only List classes that allow access for this property. Specify classes as `meta.class` objects in the form: • A single `meta.class` object • A cell array of `meta.class` objects. An empty cell array, `{}`, is the same as `private` access. See "Class Members Access"

Property	Purpose
`SetAccess` attribute, default = `public`	`public` – unrestricted access `protected` – access from class or subclasses `private` – access by class members only `immutable` — property can be set only in the constructor. See "Mutable and Immutable Properties" List classes that have set access to this property. Specify classes as `meta.class` objects in the form: • A single `meta.class` object • A cell array of `meta.class` objects. An empty cell array, `{}`, is the same as `private` access. See "Class Members Access"
`Access`	`public` – unrestricted access `protected` – access from class or subclasses `private` – access by class members only (not subclasses) List of classes that have get and set access to this property. Specify classes as `meta.class` objects in the form: • A single `meta.class` object • A cell array of `meta.class` objects. An empty cell array, `{}`, is the same as `private` access. Use `Access` to set both `SetAccess` and `GetAccess` to the same value. Query the values of `SetAccess` and `GetAccess` directly (not `Access`).

Property	Purpose
`Constant` attribute, default = `false`	Set to `true` if you want only one value for this property in all instances of the class. • Subclasses inherit constant properties, but cannot change them. • `Constant` properties cannot be `Dependent` • `SetAccess` is ignored. See "Properties with Constant Values"
`DefaultValue`	Property default value (if specified in class definition). See also `HasDefault` property. Abstract, dependent, and dynamic properties cannot specify default values.
`DefiningClass`	The `meta.class` object representing the class that defines this property.
`Dependent` attribute, default = `false`	If `false`, property value is stored in object. If `true`, the property value is not stored in the object and the set and get functions cannot access the property by indexing into the object using the property name. See "Property Get Methods"
`Transient`attribute, default = `false`	If `true`, property value is not saved when object is saved to a file. See "Save and Load Process for Objects" for more about saving objects.
`GetMethod` read-only	Function handle of the get method associated with this property. Empty if there is no get method specified. See "Property Get Methods"
`GetObservable` attribute, default = `false`	If `true`, and it is a handle class property, then listeners can be created for access to this property. The listeners are called whenever property values are queried. See "Property-Set and Query Events"
`HasDefault`	Property contains a boolean value indicating whether the property defines a default value. Test `HasDefault` before querying the `DefaultValue` property to avoid a `MATLAB:class:NoDefaultDefined` error.

Property	Purpose
`Hidden` attribute, default = `false`	Determines whether the property should be shown in a property list (e.g., Property Inspector, call to `properties`, etc.).
`NonCopyable` attribute, default = `false`	Indicate if property value should be copied when object is copied. For more information, see "Exclude Properties from Copy"
`SetMethod` read-only	Function handle of the set method associated with this property. Empty if there is no set method specified. See "Property Set Methods"
`SetObservable` attribute, default = `false`	If `true`, and it is a handle class property, then listeners can be created for access to this property. The listeners are called whenever property values are modified. See "Property-Set and Query Events"

Events

See "Listen for Changes to Property Values" for information on using property events.

Event Name	Purpose
`PreGet`	Event occurs just before property is queried.
`PostGet`	Event occurs just after property has been queried
`PreSet`	Event occurs just before this property is modified
`PostSet`	Event occurs just after this property has been modified

See Also

`meta.method` | `meta.class` | `meta.event` | `metaclass`

Topics

"Properties"
"Class Metadata"

Introduced in R2008a

metaclass

Obtain `meta.class` object

Syntax

```
mc = metaclass(object)
mc = ?ClassName
```

Description

`mc = metaclass(object)` returns the `meta.class` object for the class of `object`. The `object` input argument can be a scalar or an array of objects. However, `metaclass` always returns a scalar `meta.class` object.

`mc = ?ClassName` returns the `meta.class` object for the class with name, *`ClassName`*. The `?` operator works only with a class name, not an object.

If you pass a class name as a `char` vector to the `metaclass` function, it returns the `meta.class` object for the `char` class. Use the `?` operator or the `meta.class.fromName` method to obtain the `meta.class` object from a class name. Use this method if you want to pass the class name in a `char` variable.

Examples

Return the `meta.class` object for an instance of the `MException` class:

```
obj = MException('Msg:ID','MsgTxt');
mc = metaclass(obj);
```

Use the `?` operator to get the `meta.class` object for the `matlab.mixin.SetGet` class:

```
mc = ?matlab.mixin.SetGet;
```

Tutorials

- "Class Metadata"

See Also

`meta.class` | `meta.class.fromName`

Topics

"Class Metadata"

methods

Class method names

Syntax

```
methods('classname')
methods(...,'-full')
m = methods(...)
```

Description

`methods('classname')` displays the names of the methods for the class *`classname`*. If *`classname`* is a MATLAB or Java class, then `methods` displays only public methods, including those methods inherited from superclasses.

`methods(...,'-full')` displays a full description of the methods, including inheritance information and, for MATLAB and Java methods, method attributes and signatures. `methods` does not remove duplicate method names with different signatures. Do not use this option with classes defined before MATLAB 7.6.

`m = methods(...)` returns the method names in a cell array of strings.

`methods` is also a MATLAB class-definition keyword. See `classdef` for more information on class-definition keywords.

This function does not show generic methods from classes based on the Microsoft .NET Framework. Use your product documentation to get information on generic methods.

Examples

Retrieve the names of the static methods in class `MException`:

```
methods('MException')
```

```
Methods for class MException:
```

```
addCause     getReport      ne           throw
eq           isequal        rethrow      throwAsCaller

Static methods:

last
```

Tutorials

- "Methods"

See Also

methodsview | properties | events | what | which

Topics

"Methods"

Introduced before R2006a

methodsview

View class methods

Syntax

```
methodsview packagename.classname
methodsview classname
methodsview(object)
```

Description

`methodsview packagename.classname` displays information about the methods in the class, `classname`. If the class is in a package, include `packagename`. If `classname` is a MATLAB or Java class, `methodsview` lists only public methods, including those methods inherited from superclasses.

`methodsview classname` displays information describing the class `classname`.

`methodsview(object)` displays information about the methods of the class of `object`.

`methodsview` creates a window that displays the methods defined in the specified class. `methodsview` provides additional information like arguments, returned values, and superclasses. It also includes method qualifiers (for example, `abstract` or `synchronized`) and possible exceptions thrown.

Examples

List information on all methods in the `java.awt.MenuItem` class:

```
methodsview java.awt.MenuItem
```

MATLAB displays this information in a new window.

See Also

`methods` | `import` | `class` | `javaArray`

Introduced before R2006a

mex

Build MEX function from C/C++ or Fortran source code

Syntax

```
mex filenames
mex option1 ... optionN filenames
```

```
mex -setup lang
mex -setup -client engine [lang]
```

Description

`mex filenames` compiles and links one or more C, C++, or Fortran source files into a binary MEX file, callable from MATLAB. `filenames` specify the source files. Also builds executable files for standalone MATLAB engine and MAT-file applications.

MATLAB automatically selects a compiler, if installed, based on the language of the `filenames` arguments.

`mex option1 ... optionN filenames` builds with the specified build options. The `option1 ... optionN` arguments supplement or override the default `mex` build configuration.

`mex -setup lang` selects a compiler for the given `lang`. Use this option to change the default compiler for the given language.

`mex -setup -client engine [lang]` selects a compiler for building engine applications. Use this option when you want to change the default compiler. Use the `lang` argument for choosing Fortran or C++ compilers.

Examples

Build C MEX File

Build a single C program `yprime.c` into a MEX file.

Create a writable folder on your path `c:\work` and set it as the current folder.

```
[s,msg,msgid] = mkdir('c:\work');
if (isempty(msgid))
    mkdir('c:\work')
end
cd c:\work
```

Copy the source code example from the *`matlabroot`*`/extern/examples` folder.

```
copyfile(fullfile(matlabroot,'extern','examples','mex','yprime.c'),'.','f')
```

Build the MEX file. The output displays information specific to your compiler.

```
mex yprime.c
```

```
Building with 'MinGW64 Compiler  C '.
MEX completed successfully.
```

Test.

```
T=1;
Y=1:4;
yprime(T,Y)
```

```
ans =

    2.0000    8.9685    4.0000   -1.0947
```

Display Detailed Build and Troubleshooting Information

To display the compile and link commands and other information useful for troubleshooting, use verbose mode.

```
mex -v -compatibleArrayDims yprime.c
```

The output displays information specific to your platform and compiler.

Override Default Compiler Switch Option

Build the `yprime.c` MEX file by appending the value `-Wall` to the existing compiler flag. Because the value includes a space character, you must delineate the string; the character you use depends on the platform.

At the MATLAB prompt, use MATLAB single quotes (').

```
mex -v COMPFLAGS='$COMPFLAGS -Wall' yprime.c
```

For the MinGW-w64 compiler, which is based on gcc/g++, use the Linux compiler flags.

```
mex -v CXXFLAGS='$CXXFLAGS -Wall' yprime.c
```

At the Windows Command Prompt, use double quotes (").

```
mex -v COMPFLAGS="$COMPFLAGS -Wall" yprime.c
```

At the shell command line on Mac and Linux, use single quotes (').

```
mex -v CFLAGS='$CFLAGS -Wall' yprime.c
```

Build MEX File from Multiple Source Files

The MEX file example `fulltosparse` consists of two Fortran source files, `loadsparse.F` and `fulltosparse.F`. To run this example, you need a supported Fortran compiler installed on your system.

Copy the source files to the current folder.

```
copyfile(fullfile(matlabroot,'extern','examples','refbook','loadsparse.F'),'.','f')
copyfile(fullfile(matlabroot,'extern','examples','refbook','fulltosparse.F'),'.','f')
```

Build the `fulltosparse` MEX file. The MEX file name is `fulltosparse` because `fulltosparse.F` is the first file on the command line. The output contains information specific to your compiler.

```
mex -largeArrayDims fulltosparse.F loadsparse.F
```

```
Building with 'Intel Visual Fortran Composer XE 2013 with Microsoft Visual Studio 2012
MEX completed successfully.
```

Test.

```
full = eye(5);
spar = fulltosparse(full)
```

```
spar =
```

```
    1,1         1
    2,2         1
    3,3         1
    4,4         1
    5,5         1
```

Combine Source Files Using Wildcard

Combine all C source files in the current folder into MEX file `mymex`. Use the `-output` option to control the name of the MEX file.

```
mex -output mymex *.c
```

Preview Build Commands

To preview the build command details without executing the commands, use the `-n` option. The output contains information specific to your platform and compiler.

```
mex -n yprime.c
```

Create and Link to Separate Object Files

You can link to object files that you compile separately from your source MEX files.

The MEX file example fulltosparse consists of two Fortran source files. The `fulltosparse` file is the gateway routine (contains the `mexFunction` subroutine) and `loadsparse` contains the computational routine.

To run this example, you need a supported Fortran compiler installed on your system. Copy the computational subroutine to your current folder.

```
copyfile(fullfile(matlabroot,'extern','examples','refbook','loadsparse.F'),'.','f')
```

Compile the subroutine and place the object file in a separate folder, `c:\objfiles`.

```
mkdir c:\objfiles
mex -largeArrayDims -c -outdir c:\objfiles loadsparse.F
```

```
Building with 'Intel Visual Fortran Composer XE 2013 with Microsoft Visual Studio 2012
MEX completed successfully.
```

Copy the gateway subroutine to your current folder. Compile and link with the `loadsparse` object file.

```
copyfile(fullfile(matlabroot,'extern','examples','refbook','fulltosparse.F'),'.','f')
mex -largeArrayDims fulltosparse.F c:\objfiles\loadsparse.obj
```

```
Building with 'Intel Visual Fortran Composer XE 2013 with Microsoft Visual Studio 2012
MEX completed successfully.
```

Specify Path to Include File

To specify the path to include the MATLAB LAPACK library subroutines for handling complex number routines, use the `-I` option. To use these subroutines, your MEX file must access the header file `fort.h`.

Copy the `matrixDivideComplex.c` example to the current folder.

```
copyfile(...
fullfile(matlabroot,'extern','examples','refbook','matrixDivideComplex.c'),'.','f')
```

Create the `-I` argument by concatenating `'-I'` with the path to `fort.h` file.

```
ipath = ['-I' fullfile(matlabroot,'extern','examples','refbook')];
```

Create variables for the names and paths to the LAPACK library file and the file, `fort.c`, containing the complex number handling routines.

```
lapacklib = fullfile(...
    matlabroot,'extern','lib',computer('arch'),'microsoft','libmwlapack.lib');
fortfile = fullfile(...
    matlabroot,'extern','examples','refbook','fort.c');
```

Build the MEX file.

```
mex('-v',ipath,'matrixDivideComplex.c',fortfile,lapacklib)
```

Specify Path to Library File

Build the `matrixDivide.c` example on a Windows platform using the `-L` and `-l` options to specify the `libmwlapack.lib` library. The library file is located in the folder, *`matlabroot`*`\extern\lib\`*`arch`*`\microsoft`.

Copy the `matrixDivide.c` example to the current folder.

```
copyfile(fullfile(matlabroot,'extern','examples','refbook','matrixDivide.c'),'.','f')
```

Capture the value of *`matlabroot`*.

```
matlabroot
```

```
ans =

C:\Program Files\MATLAB\R2014a
```

Capture the value of *arch*.

```
computer('arch')
```

```
ans =

win64
```

To build the MEX file, copy the values of *matlabroot* and *arch* into the `mex` command, as shown in the following statement.

```
mex '-LC:\Program Files\MATLAB\R2014a\extern\lib\win64\microsoft'...
   -llibmwlapack matrixDivide.c
```

You must use the `'` characters because `\Program Files` in the path includes a space.

Define Compiler Directive

The `mxcreatecharmatrixfromstr.c` example uses a `#define` symbol `SPACE_PADDING` to determine what character to use between character vectors in a matrix. To set the value, build the MEX file with the `-D` option.

Copy the example to the current folder.

```
copyfile(fullfile(matlabroot,'extern','examples','mx','mxcreatecharmatrixfromstr.c'),'
```

Set the `SPACE_PADDING` directive to add a space between values.

```
mex mxcreatecharmatrixfromstr.c -DSPACE_PADDING
```

```
Building with 'MinGW64 Compiler  C '.
MEX completed successfully.
```

Build Engine Application

Copy the `engwindemo.c` engine example to the current folder.

```
copyfile(fullfile(matlabroot,'extern','examples','eng_mat','engwindemo.c'),'.','f')
```

```
mex -client engine engwindemo.c
```

If you are running on a Windows platform, you must first register MATLAB as a COM server. For more information, see “Register MATLAB as a COM Server”.

Run the example.

```
!engwindemo
```

Select C Compiler

```
mex -setup
```

MATLAB displays the options for your version and system based on the list of Supported and Compatible Compilers.

- “Table of MEX File Source Code Files”

Input Arguments

`filenames` — One or more file names

character vector

One or more file names, including name and file extension, specified as a character vector. If the file is not in the current folder, specify the full path to the file. File names can be any combination of:

- C, C++, or Fortran language source files
- Simulink S-function files
- Object files
- Static library files. For linking dynamic libraries, use the `-l`*`libname`* option.

The first source code file listed in `filenames` is the name of the binary MEX file. To override this naming convention, use the `'-output'` option.

Data Types: `char`

`option1 ... optionN` — One or more build options

character vectors corresponding to valid option flags

One or more build options, specified as one of these values. Options can appear in any order on any platform, except where indicated.

Option	Description
`@rspfile`	Uses Windows RSP file. An RSP file is a text file containing command-line options. Non-ASCII characters are not supported.
`-c`	Compiles an object file only. Does not build a binary MEX file.
`-client engine`	Build engine application.
`-compatibleArrayDims` `-largeArrayDims`(default)	Links with the specified MATLAB array-handling API. • `-compatibleArrayDims` — Uses the MATLAB Version 7.2 array-handling API, which limits arrays to 2^{31}-1 elements. Default option for C MEX S-functions only. • `-largeArrayDims` — Uses the MATLAB large-array-handling API. This API handles arrays with more than 2^{31}-1 elements. Must use this option when calling LAPACK or BLAS functions. Default option for MEX files. In verbose mode (`-v` option), if you do not specify either the `-compatibleArrayDims` or the `-largeArrayDims` option, MATLAB displays a message showing the default option.

`-Dsymbolname`
`-Dsymbolname=symbolvalu`
`-Usymbolname`
	The `-D` options define C preprocessor macros. Equivalent to the following in the source file:
	• `#define symbolname`
	• `#define symbolname symbolvalue`
	
	The `-U` option removes any initial definition of the C preprocessor macro, `symbolname`. Inverse of the `-D` option.
	
	Do not add a space between **D** or **U** and *`symbolname`*. Do not add spaces around the **=** sign.
	
	Example: “Define Compiler Directive” on page 1-7369

Option	Description
`-f` *`filepath`*	To build engine applications, use the `-client engine` option. Specifies name and location of the `mex` configuration file. Overrides the default compiler selection. For information about using a non-default compiler, see "Change Default Compiler". *`filepath`* is the name and full path of the configuration file, specified as a character vector.
`-g`	Adds symbolic information and disables optimizing built object code. Use for debugging. To debug with optimization, add the `-O` option.
`-h[elp]`	Displays help for `mex`. Use from an operating system prompt.
`-I`*`pathname`*	Adds *`pathname`* to the list of folders to search for `#include` files. Do not add a space between **I** and *`pathname`*. Example: "Specify Path to Include File" on page 1-7368

Option	Description
`-l`*`libname`* `-L`*`libfolder`* `-l`*`libname`*	Links with dynamic object library *`libname`* in (optional) *`libfolder`*. MATLAB expands *`libname`* to: • *`libname`*`.lib` or `lib`*`libname`*`.lib` — Windows systems • `lib`*`libname`*`.dylib` — Mac systems • `lib`*`libname`*`.so` — Linux systems If used, the `-L` option must precede the `-l` option. When using the `-L` option on Linux or Mac systems, you also must set the runtime library path, as explained in "Setting Run-Time Library Path". Do not add a space between **l** and *`libname`* or between **L** and *`libfolder`*. Specify the `-l` option with the lowercase letter **L**. To link a static library, use the `filenames` input argument. Example: "Specify Path to Library File" on page 1-7368

`-largeArrayDims`
(default)
`-compatibleArrayDims`
	Links with the specified MATLAB array-handling API.
	
	• `-largeArrayDims` — Uses the MATLAB large-array-handling API. This API handles arrays with more than 2^{31}-1 elements. Must use this option when calling LAPACK or BLAS functions. Default option.
	• `-compatibleArrayDims` — Uses the MATLAB Version 7.2 array-handling API, which limits arrays to 2^{31}-1 elements. Default option for C MEX S-functions only.
	
	In verbose mode (`-v` option), if you do not specify either the `-compatibleArrayDims` or the `-largeArrayDims` option, MATLAB displays a message showing the default option.

Option	Description
`-n`	Displays, but does not execute, commands that `mex` would execute. Example: "Preview Build Commands" on page 1-7367
`-O`	Optimizes the object code. Use this option to compile with optimization. Optimization is enabled by default. Optimization is disabled when the `-g` option appears without the `-O` option. Specify this option with the capital letter **O**.
`-outdir` *`dirname`*	Places all output files in folder *`dirname`*. Example: "Create and Link to Separate Object Files" on page 1-7367
`-output` *`mexname`*	Overrides the default MEX file naming mechanism. Creates binary MEX file named *`mexname`* with the appropriate MEX file extension. Example: "Combine Source Files Using Wildcard" on page 1-7367
`-setup` *`lang`*	Change the default compiler to build *`lang`* language MEX files. When you use this option, all other command-line options are ignored.
`-silent`	Suppresses informational messages. The `mex` command still reports errors and warnings, even when you specify `-silent`.
`-U`*`symbolname`*	Removes any initial definition of the C preprocessor macro *`symbolname`*. (Inverse of the `-D` option.) Do not add a space between **U** and *`symbolname`*.

Option	Description
`-v`	Builds in verbose mode. Displays values for internal variables after all command-line arguments are considered. Displays each compile and link step fully evaluated. Use for troubleshooting compiler setup problems. Example: “Display Detailed Build and Troubleshooting Information” on page 1-7365
`varname=varvalue`	Overrides default setting for variable *`varname`*. This option is processed after all command-line arguments are considered. Example: “Override Default Compiler Switch Option” on page 1-7365.

`lang` — Language

`C` (default) | `C++` | `CPP` | `Fortran`

Language, specified as one of these values.

`C`	C compilers, including C++.
`C++` or `CPP`	C++ compilers.
`Fortran`	Fortran compilers.

Tips

- You can run `mex` from:
  - MATLAB Command Window
  - Windows system prompt
  - Mac Terminal
  - Linux shell

  For command-line usage outside of MATLAB, the `mex` program is located in the folder specified by `[matlabroot '/bin']`.
- The MEX file has a platform-dependent extension. You can place binary MEX files for different platforms in the same folder.

MEX File Platform-Dependent Extension

Platform	Binary MEX File Extension
Linux (64-bit)	`mexa64`
Apple Mac (64-bit)	`mexmaci64`
Windows (64-bit)	`mexw64`

To identify the MEX file extension, use the `mexext` function.

- To use `mex` to build executable files for standalone MATLAB engine and MAT-file applications, use the `-client engine` option.

See Also

See Also

"C/C++ Matrix Library API" | "Fortran Matrix Library API" | `clear` | `computer` | `dbmex` | `inmem` | `loadlibrary` | `mex.getCompilerConfigurations` | `mexext` | `pcode` | `prefdir` | `system`

Topics

"Table of MEX File Source Code Files"
"Build MEX File"
"Change Default Compiler"
"Troubleshoot MEX Files"
"Upgrade MEX Files to Use 64-Bit API"

External Websites

Supported and Compatible Compilers

Introduced before R2006a

mex.getCompilerConfigurations

Get compiler configuration information for building MEX files

Syntax

```
cc = mex.getCompilerConfigurations
cc = mex.getCompilerConfigurations(lang)
cc = mex.getCompilerConfigurations(lang,list)
```

Description

`cc = mex.getCompilerConfigurations` returns an object `cc` containing information about the default compiler configurations used by the `mex` command. There is one configuration for each supported language.

`cc = mex.getCompilerConfigurations(lang)` returns an array of objects for the given language, `lang`.

`cc = mex.getCompilerConfigurations(lang,list)` returns information about the set of configurations, `list`.

Examples

Display Information for C Compiler

```
myCCompiler = mex.getCompilerConfigurations('C','Selected')
```

```
myCCompiler = 

  CompilerConfiguration with properties:

             Name: 'Microsoft Visual C++ 2010 (C)'
     Manufacturer: 'Microsoft'
         Language: 'C'
          Version: '10.0'
         Location: 'c:\Program Files (x86)\Microsoft Visual Studio 10.0'
        ShortName: 'MSVC100'
```

```
         Priority: 'A'
          Details: [1x1 mex.CompilerConfigurationDetails]
       LinkerName: 'link'
    LinkerVersion: ''
           MexOpt: 'C:\Users\auser\AppData\Roaming\MathWorks\MATLAB\R2014a\mex_C_win64
```

MATLAB displays information depending on your architecture and your version of MATLAB.

Display Number of Supported C Compilers

```
cLanguageCC = mex.getCompilerConfigurations('C','Supported');
length(cLanguageCC)
```

```
ans =
    10
```

The number of compilers for your version of MATLAB might be different.

Input Arguments

`lang` — Language

`'Any'` (default) | `'C'` | `'C++'` | `'CPP'` | `'Fortran'`

Language, specified as one of these values.

`'Any'`	Default value. All supported languages.
`'C'`	All C compiler configurations, including C++ configurations.
`'C++'` or `'CPP'`	All C++ compiler configurations.
`'Fortran'`	All Fortran compiler configurations.

`list` — Set of configurations

`'Selected'` (default) | `'Installed'` | `'Supported'`

Set of configurations, specified as one of these values.

`'Selected'`	The default compiler for each language.
`'Installed'`	All supported compilers `mex` finds installed on your system.

`'Supported'`	All compilers supported in the current release.

Output Arguments

`cc` — Compiler information

mex.CompilerConfiguration object or array of objects

Compiler information, specified as a `mex.CompilerConfiguration` object or array of `mex.CompilerConfiguration` objects. The `mex.CompilerConfiguration` class contains the following read-only properties.

Property	Purpose
`Name`	Compiler name.
`ShortName`	Text used to identify options file for the compiler.
`Manufacturer`	Name of the manufacturer of the compiler.
`Language`	Compiler language.
`Version`	(Windows platforms only) Version of the compiler.
`Location`	(Windows platforms only) Folder where compiler is installed.
`Details`	More read-only properties about the compiler configuration. These properties depend on the compiler, platform, and release of MATLAB.
`LinkerName`	Linker name.
`LinkerVersion`	(Windows platforms only) Version of the linker.
`MexOpt`	Name and full path to options file.
`Priority`	The priority of this compiler.

See Also

See Also

`mex`

External Websites

Supported and Compatible Compilers

Introduced in R2008b

MException class

Capture error information

Description

Any MATLAB code that detects an error and throws an exception must construct an `MException` object. This class contains retrievable information about errors. MATLAB can throw either predefined exceptions or exceptions that you construct.

Construction

`ME = MException(msgID,msgtext)` captures information about a specific error and stores it in the `MException` object, `ME`. The `MException` object is constructed with a message identifier, `msgID`, and an error message, `msgtext`.

`ME = MException(msgID,msgtext,A1,...,An)` allows formatting of the error message using text or numeric values, `A1,...,An`, to replace conversion specifiers in `msgtext` at run time.

Input Arguments

`msgID` — Identifier for error
character vector

Identifier for the error, specified as a character vector. Use the message identifier with exception handling to better identify the source of the error or to control a selected subset of the exceptions in your program.

The message identifier includes a `component` and `mnemonic`. The identifier must always contain a colon and follows a simple format: `component:mnemonic`. The `component` and `mnemonic` fields must each begin with a letter. The remaining characters can be alphanumerics (A–Z, a–z, 0–9) and underscores. No white space characters can appear anywhere in `msgID`. For more information, see “Message Identifiers”.

Example: `'MyComponent:noSuchVariable'`

`msgtext` — Information about cause of error

character vector

Information about the cause of the error and how you might correct it, specified as a character vector. To format the text, use escape sequences, such as `\t` or `\n`. You also can use any format specifiers supported by the `sprintf` function, such as `%s` or `%d`. Specify values for the conversion specifiers via the `A1,...,An` input arguments. For more information, see "Formatting Text".

Example: `'Error opening file.'`

Example: `'Error on line %d.'`

`A1,...,An` — Numeric or character arrays

scalar | vector | matrix | multidimensional array

Numeric or character arrays, specified as a scalar, vector, matrix, or multidimensional array. This input argument provides the values that correspond to and replace the conversion specifiers in `msgtext`.

Properties

`identifier` — Unique identifier of error

character vector

Character vector that uniquely identifies the error, specified as a character vector by the `msgID` input argument. This property is read only. For more information, see "Message Identifiers".

`message` — Error message

character vector

Character vector that contains the error message that is displayed when MATLAB throws the exception, specified by the `msgtext` and `A1,...,An` input arguments. This property is read only. For more information, see "Text of the Error Message".

`stack` — Stack trace information

array of structures

Structure array that contains stack trace information including the file name (`file`), function name (`name`), and line number (`line`) where MATLAB throws the exception.

If the error occurs in a called function, the `stack` property also contains the file name, function name, and line number for each of the called functions. MATLAB generates the stack only when it throws the exception.

`stack` is an N-by-1 `struct` array, where N represents the depth of the call stack. This property is read only. For more information, see "The Call Stack".

`cause` — Cause of the exception

cell array of `MException` objects

Cell array of `MException` objects that caused MATLAB to create this exception. Use the `addCause` method to add an exception to the `cause` field of the another exception. For more information, see "The Cause Array".

Methods

addCause	Record additional causes of exception
getReport	Get error message for exception
last	Return last uncaught exception
rethrow	Rethrow previously caught exception
throw	Throw exception
throwAsCaller	Throw exception as if occurs within calling function

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create MException Object

```
msgID = 'myComponent:inputError';
msgtext = 'Input does not have the expected format.';
```

```
ME = MException(msgID,msgtext)
```

```
ME 
  MException with properties:

    identifier: 'myComponent:inputError'
       message: 'Input does not have the expected format.'
         cause: {}
         stack: [0×1 struct]
```

Create MException with Formatted Error Message

```
msgID = 'MATLAB:test';
msgtext = 'There are %d errors on this page';
A1 = 10;

ME = MException(msgID,msgtext,A1)
```

```
ME 
  MException with properties:

    identifier: 'MATLAB:test'
       message: 'There are 10 errors on this page'
         cause: {}
         stack: [0×1 struct]
```

Create and Throw MException Object

Throw an exception if an input variable name does not exist in the workspace.

```
str = input('Type a variable name: ','s');
if ~exist(str,'var')
    ME = MException('MyComponent:noSuchVariable', ...
        'Variable %s not found',str);
    throw(ME)
end
```

At the input prompt, enter any variable that does not exist in your workspace. For example, enter `notaVariable`.

```
Variable notaVariable not found
```

Since `notVariable` doesn't exist in your workspace, MATLAB creates an `MException` object, and then throws it.

Use try/catch to Capture Exception

Catch the exception generated by calling a nonexistent function, `notaFunction`. If the function is not defined, issue a warning and assign the output a value of 0.

```
try
    a = notaFunction(5,6);
catch ME
    if strcmp(ME.identifier,'MATLAB:UndefinedFunction')
        warning('Function is undefined.  Assigning a value of 0.');
    else
        rethrow(ME)
    end
end
```

```
Warning: Function is undefined.  Assigning a value of 0.
```

By itself, the call to `notaFunction` results in an error. Using `try` and `catch`, this code catches the undefined function exception and repackages it as a warning, allowing MATLAB to continue executing subsequent commands. If the caught exception has a different error identifier, MATLAB rethrows the exception.

- "Capture Information About Exceptions"

See Also

See Also

MException.throw | MException.rethrow | MException.throwAsCaller | MException.addCause | MException.getReport | MException.last | `assert` | `dbstack` | `error` | `try, catch`

Topics

"Capture Information About Exceptions"

Introduced in R2007b

addCause

Class: MException

Record additional causes of exception

Syntax

```
baseException = addCause(baseException,causeException)
```

Description

`baseException = addCause(baseException,causeException)` modifies the existing `MException` object `baseException` by appending `causeException` to its `cause` property. Catching the resulting exception in a `try/catch` statement makes the base exception, along with all of the appended cause records, available to help diagnose the error.

Input Arguments

`baseException` — Primary exception
`MException` object

Primary exception containing the primary cause and location of an error, specified as an `MException` object.

`causeException` — Related exception
`MException` object

Related exception containing the cause and location of an error related to `baseException`, specified as an `MException` object.

Examples

Add Causes to Exception

Create an array, and an index into it with a logical array.

```
A = [13 42; 7 20];
idx = [1 0 1; 0 1 0];
```

Create an exception that provides general information about an error. Test the index array and add exceptions with more detailed information about the source of the failure.

```
try
    A(idx);
catch
    msgID = 'MYFUN:BadIndex';
    msg = 'Unable to index into array.';
    baseException = MException(msgID,msg);

    try
        assert(islogical(idx),'MYFUN:notLogical',...
            'Indexing array is not logical.')
    catch causeException
        baseException = addCause(baseException,causeException);
    end

    if any(size(idx) > size(A))
        msgID = 'MYFUN:incorrectSize';
        msg = 'Indexing array is too large.';
        causeException2 = MException(msgID,msg);
        baseException = addCause(baseException,causeException2);
    end
    throw(baseException)
end
```

```
Unable to index into array.

Caused by:
    Indexing array is not logical.
    Indexing array is too large.
```

Examine the `baseException` object.

```
baseException
```

```
baseException =

  MException with properties:

    identifier: 'MYFUN:BadIndex'
       message: 'Unable to index into array.'
```

```
        cause: {2x1 cell}
        stack: [0x1 struct]
```

The value of the `cause` property is a `2x1` cell array.

Examine the first cause of the exception.

```
baseException.cause{1}
```

```
ans =

  MException with properties:

    identifier: 'MYFUN:notLogical'
       message: 'Indexing array is not logical.'
         cause: {0x1 cell}
         stack: [0x1 struct]
```

Examine the second cause of the exception.

```
baseException.cause{2}
```

```
ans =

  MException with properties:

    identifier: 'MYFUN:incorrectSize'
       message: 'Indexing array is too large.'
         cause: {}
         stack: [0x1 struct]
```

See Also

See Also

MException | MException.throw | MException.rethrow | MException.throwAsCaller | MException.getReport | MException.last | `assert` | `error` | `try, catch`

Introduced in R2007b

getReport

Class: MException

Get error message for exception

Syntax

```
msgText = getReport(exception)
msgText = getReport(exception,type)
msgText = getReport(exception,type,'hyperlinks',hlink)
```

Description

`msgText = getReport(exception)` gets the error message for an exception and returns it as formatted text, `msgText`. The message is the value of the `message` property of the `MException` object, `exception`. It is the same text that MATLAB displays when it throws the exception.

`msgText = getReport(exception,type)` returns the error message using the indicated level of detail, specified by `type`.

`msgText = getReport(exception,type,'hyperlinks',hlink)` uses the value of `hlink` to determine whether to include active hyperlinks to the failing lines of code within the error message.

Input Arguments

`exception` — Exception object that provides error message

`MException` object

Exception object that provides the error message, specified as a scalar `MException` object.

`type` — Detail indicator of message

`'extended'` (default) | `'basic'`

Detail indicator of the message returned, specified as `'extended'` or `'basic'`.

`type` Value	`msgText` Detail Level
`'extended'` (default)	`msgText` includes the line number, error message, cause, and stack summary. To display the proper stack, MATLAB first must throw an exception.
`'basic'`	`msgText` includes the error message.

`hlink` — Hyperlink indicator of message
`'on'` (default) | `'off'` | `'default'`

Hyperlink indicator of the message that includes active hyperlinks to the failing lines of code, specified as `'on'`, `'off'`, or `'default'`.

`hlink` Value	Action
`'on'`	Display hyperlinks to failing lines of code.
`'off'`	Do not display hyperlinks to failing lines of code.
`'default'`	Use the default for the Command Window to determine whether or not to use hyperlinks in the error message.

Examples

Get Error Message from Exception

Cause MATLAB to throw an exception.

```
plus
```

```
Error using +
Not enough input arguments.
```

Get the error message from the exception.

```
exception = MException.last;
msgText = getReport(exception)
```

```
msgText =

Error using +
```

```
Not enough input arguments.
```

Specify Detail Level in Error Message

In a file in your current working folder, create the following function in `testFunc.m`.

```
function a = testFunc
try
    a = notaFunction(5,6);
catch a

end
```

Since the function, `notaFunction`, does not exist, `testFunc` returns an `MException` object.

At the command prompt, call `testFunc` and get the error message.

```
m = testFunc;
msgText = getReport(m)
```

```
msgText =

Undefined function 'notaFunction' for input arguments of type 'double'.

Error in testFunc (line 3)
    a = notaFunction(5,6);
```

Specify that the error message only contains the error message and not the stack information.

```
msgText = getReport(m,'basic')
```

```
msgText =

Undefined function 'notaFunction' for input arguments of type 'double'.
```

Turn Off Hyperlinks in Error Message

Cause MATLAB to throw an exception.

```
try
    surf
catch exception
end
```

Get the error message from the exception.

```
msgText = getReport(exception)
```

```
msgText =

Error using surf (line 49)
Not enough input arguments.
```

Get the error message without active hyperlinks to `surf.m`.

```
msgText = getReport(exception,'extended','hyperlinks','off')
```

```
msgText =

Error using surf (line 49)
Not enough input arguments.
```

See Also

See Also

MException.addCause | MException.rethrow | MException.last | MException.throw | MException.throwAsCaller | MException | `assert` | `error` | `try, catch`

Introduced in R2007b

MException.last

Class: MException

Return last uncaught exception

Syntax

```
exception = MException.last
MException.last('reset')
```

Description

`exception = MException.last` returns the contents of the most recently thrown, uncaught `MException` object. `MException.last` is not set if the last exception is caught by a `try/catch` statement. `MException.last` is a static method of the `MException` class.

`MException.last('reset')` clears the properties of the exception returned from `MException.last`. It sets the `MException` `identifier` and `message` properties to an empty character vector, the `stack` property to a 0-by-1 structure, and the `cause` property to an empty cell array.

Examples

Get Last Uncaught Exception

Cause MATLAB to throw, but not catch, an exception.

```
A = 25;
A(2)
```

```
Index exceeds matrix dimensions.
```

Get the uncaught exception.

```
exception = MException.last

exception =

  MException with properties:

    identifier: 'MATLAB:badsubscript'
       message: 'Index exceeds matrix dimensions.'
         cause: {}
         stack: [0x1 struct]
```

Reset Last Uncaught Exception

Call the `surf` function with no input arguments.

```
surf

Error using surf (line 49)
Not enough input arguments.
```

Get the uncaught exception.

```
exception = MException.last

exception =

  MException with properties:

    identifier: 'MATLAB:narginchk:notEnoughInputs'
       message: 'Not enough input arguments.'
         cause: {}
         stack: [1x1 struct]
```

Get the last, uncaught exception.

```
MException.last('reset')
exception = MException.last

exception =

  MException with properties:

    identifier: ''
       message: ''
         cause: {0x1 cell}
```

```
        stack: [0x1 struct]
```

Tips

- Use `MException.last` only from the Command Window, not within a function.

See Also

See Also

MException.addCause | MException.getReport | MException.rethrow | MException.throw | MException.throwAsCaller | MException | `assert` | `error` | `try, catch`

Introduced in R2007b

rethrow

Class: MException

Rethrow previously caught exception

Syntax

```
rethrow(exception)
```

Description

`rethrow(exception)` rethrows a previously caught exception, `exception`. MATLAB typically responds to errors by terminating the currently running program. However, you can use a `try/catch` block to catch the exception. This interrupts the program termination so you can execute your own error handling procedures. End the `catch` block with a `rethrow` statement to terminate the program and redisplay the exception.

`rethrow` handles the stack trace differently from `error`, `assert`, and `throw`. Instead of creating the stack from where MATLAB executes the method, `rethrow` preserves the original exception information and enables you to retrace the source of the original error.

Input Arguments

`exception` — Exception containing cause and location of error

`MException` object

Exception containing the cause and location of an error, specified as a scalar `MException` object.

Examples

Catch and Rethrow Exception

Cause MATLAB to throw an error by calling `surf` with no inputs. Catch the exception, display the error identifier, and rethrow the exception.

```
try
    surf
catch ME
    disp(['ID: ' ME.identifier])
    rethrow(ME)
end
```

```
ID: MATLAB:narginchk:notEnoughInputs
Error using surf (line 49)
Not enough input arguments.
```

Compare Behavior of throw and rethrow

Create a function, `combineArrays`, in your working folder.

```
function C = combineArrays(A,B)
try
    C = catAlongDim1(A,B);       % Line 3
catch exception
    throw(exception)             % Line 5
end
end

function V = catAlongDim1(V1,V2)
V = cat(1,V1,V2);                % Line 10
end
```

Call the `combineArrays` function with arrays of different sizes.

```
A = 1:5;
B = 1:4;

combineArrays(A,B)
```

```
Error using combineArrays (line 5)
Dimensions of matrices being concatenated are not consistent.
```

The stack refers to line 5 where MATLAB throws the exception.

Replace `throw(exception)` with `rethrow(exception)` on line 5 of the `combineArrays` function, and call the function again.

```
combineArrays(A,B)
```

```
Error using cat
```

```
Dimensions of matrices being concatenated are not consistent.

Error in combineArrays>catAlongDim1 (line 10)
V = cat(1,V1,V2);                % Line 10

Error in combineArrays (line 3)
    C = catAlongDim1(A,B);       % Line 3
```

The `rethrow` method maintains the original stack and indicates the error is on line 3.

See Also

See Also

MException.addCause | MException.getReport | MException.last | MException.throw | MException.throwAsCaller | MException | `assert` | `error` | `try, catch`

Introduced in R2007b

throw

Class: MException

Throw exception

Syntax

```
throw(exception)
```

Description

`throw(exception)` throws an exception based on the information contained in the `MException` object, `exception`. The exception terminates the currently running function and returns control either to the keyboard or to an enclosing `catch` block. When you throw an exception from outside a `try/catch` statement, MATLAB displays the error message in the Command Window.

The `throw` method, unlike the `throwAsCaller` and `rethrow` methods, creates the stack trace from the location where MATLAB executes the method.

You can access the `MException` object via a `try/catch` statement or the `MException.last` method.

Input Arguments

`exception` — Exception containing cause and location of error

`MException` object

Exception containing the cause and location of an error, specified as a scalar `MException` object.

Examples

Create and Throw MException Object

Throw an exception if an input variable name does not exist in the workspace.

```
str = input('Type a variable name: ','s');
if ~exist(str,'var')
    ME = MException('MyComponent:noSuchVariable', ...
        'Variable %s not found',str);
    throw(ME)
end
```

At the input prompt, enter any variable that does not exist in your workspace. For example, enter `notaVariable`.

```
Variable notaVariable not found
```

Since `notVariable` doesn't exist in your workspace, MATLAB creates an `MException` object, and then throws it.

Compare Behavior of throw and rethrow

Create a function, `combineArrays`, in your working folder.

```
function C = combineArrays(A,B)
try
    C = catAlongDim1(A,B);       % Line 3
catch exception
    throw(exception)             % Line 5
end
end

function V = catAlongDim1(V1,V2)
V = cat(1,V1,V2);                % Line 10
end
```

Call the `combineArrays` function with arrays of different sizes.

```
A = 1:5;
B = 1:4;

combineArrays(A,B)
```

```
Error using combineArrays (line 5)
Dimensions of matrices being concatenated are not consistent.
```

The stack refers to line 5 where MATLAB throws the exception.

Replace `throw(exception)` with `rethrow(exception)` on line 5 of the `combineArrays` function, and call the function again.

```
combineArrays(A,B)
```

```
Error using cat
Dimensions of matrices being concatenated are not consistent.

Error in combineArrays>catAlongDim1 (line 10)
V = cat(1,V1,V2);                % Line 10

Error in combineArrays (line 3)
    C = catAlongDim1(A,B);       % Line 3
```

The `rethrow` method maintains the original stack and indicates the error is on line 3.

See Also

See Also

MException | MException.rethrow | MException.throwAsCaller | MException.addCause | MException.getReport | MException.last | | `error` | `try, catch`

Introduced in R2007b

throwAsCaller

Class: MException

Throw exception as if occurs within calling function

Syntax

```
throwAsCaller(exception)
```

Description

`throwAsCaller(exception)` throws an exception as if it occurs within the calling function. The exception terminates the currently running function and returns control to the keyboard or an enclosing `catch` block. When you throw an exception from outside a `try/catch` statement, MATLAB displays the error message in the Command Window.

You can access the `MException` object via a `try/catch` statement or the `MException.last` method.

In some cases, it is more informative for the error to point to the location in the calling function that results in the exception rather than pointing to the function that actually throws the exception. You can use `throwAsCaller` to simplify the error display.

Input Arguments

`exception` — Exception containing cause and location of error

`MException` object

Exception containing the cause and location of an error, specified as a scalar `MException` object.

Examples

Compare Behavior of throw and throwAsCaller

Create a function, `sayHello`, in your working folder.

```
function sayHello(N)
checkInput(N)
str = ['Hello, ' N '!'];
disp(str)

function checkInput(N)
if ~ischar(N)
    ME = MException('sayHello:inputError','Input must be char.');
    throw(ME)
end
```

At the command prompt, call the function with a numeric input.

```
sayHello(42)
```

```
Error using sayHello>checkInput (line 9)
Input must be char.

Error in sayHello (line 2)
checkInput(N)
```

The top of the stack refers to line 9 because this is where MATLAB throws the exception. After the initial stack frame, MATLAB displays information from the calling function.

Replace `throw(ME)` with `throwAsCaller(ME)` in line 9 of `sayHello.m` and call the function again.

```
sayHello(42)
```

```
Error using sayHello (line 2)
Input must be char.
```

The top of the stack refers to line 2 because that is the location of the error in the calling function.

See Also

See Also

MException | MException.rethrow | MException.throwAsCaller | MException.addCause | MException.getReport | MException.last | | `assert` | `error` | `try, catch`

Introduced in R2007b

mexext

Binary MEX file-name extension

Syntax

```
ext = mexext
extlist = mexext('all')
```

Description

`ext = mexext` returns the file-name extension for the current platform.

`extlist = mexext('all')` returns the extensions for all platforms.

Examples

Display File Extension for Your Computer

Find the MEX file extension for the system you are currently working on.

```
ext = mexext
```

```
ext =
'mexw64'
```

Your results reflect your system.

Find MEX File Extension for Mac Platform

Get the list of file extensions for supported platforms.

```
extlist = mexext('all');
```

The `mex` command identifies a platform by its `arch` value, which is the output of the `computer('arch')` command. For Mac platforms, the value is `maci64`.

Search the `arch` field in `extlist` for `'maci64'`, and display the corresponding `ext` field.

```
for k=1:length(extlist)
   if strcmp(extlist(k).arch, 'maci64')
   disp(sprintf('Arch: %s  File Extension: %s', extlist(k).arch, extlist(k).ext))
   end
end
```

```
Arch: maci64  File Extension: mexmaci64
```

Output Arguments

`ext` — File-name extension

`mexa64` | `mexmaci64` | `mexw64`

File-name extension for MEX file, returned as one of these values.

MEX File Platform-Dependent Extension

Platform	Binary MEX File Extension
Linux (64-bit)	`mexa64`
Apple Mac (64-bit)	`mexmaci64`
Windows (64-bit)	`mexw64`

`extlist` — All file-name extensions

structure

All file-name extensions, returned as a structure with these fields:

`arch` — Platform

character vector

Platform, returned as a character vector. The name of the platform is the output of the `computer('arch')` command.

`ext` — File extension

character vector

File extension, returned as a character vector.

Tips

- To use the MEX file-name extension in makefiles or scripts outside MATLAB, type one of the following from the system command prompt. The script is located in the *matlabroot*`\bin` folder.

  - `mexext.bat`—Windows platform.
  - `mexext.sh`—UNIX platform.

  For example, the following commands are in a GNU® makefile.

  ```
  ext = $(shell mexext)
  yprime.$(ext) : yprime.c
    mex yprime.c
  ```

See Also

See Also

`computer` | `mex`

Introduced before R2006a

mfilename

File name of currently running code

Syntax

```
mfilename
p = mfilename('fullpath')
c = mfilename('class')
```

Description

`mfilename` returns a character vector containing the file name of the file in which the function call occurs. When called from within the file, it returns the name of that file. This allows a script or function to determine its name.

`p = mfilename('fullpath')` returns the full path and name of the file in which the call occurs, not including the filename extension.

`c = mfilename('class')` in a method, returns the class of the method, not including the leading `@` sign. If called from a nonmethod, it yields the empty character vector.

Tips

If `mfilename` is called with any argument other than the above two, it behaves as if it were called with no argument.

When called from the command line, `mfilename` returns an empty character vector.

To get the names of the callers of a MATLAB function file, use `dbstack` with an output argument.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`dbstack` | `nargin` | `function` | `nargout` | `inputname`

Introduced before R2006a

mget

Class: FTP

Download files from FTP server

Syntax

```
mget(ftpobj,contents)
mget(ftpobj,contents,target)
```

Description

`mget(ftpobj,contents)` retrieves the file or folder specified by `contents` from an FTP server into the MATLAB current folder.

`mget(ftpobj,contents,target)` retrieves the file or folder into the local folder specified by `target`, which includes an absolute or relative path.

Input Arguments

`ftpobj`

FTP object created by ftp.

`contents`

Character vector enclosed in single quotation marks that specifies either a file name or a folder name. Can include a wildcard character (`*`).

`target`

Character vector enclosed in single quotation marks that specifies the absolute or relative path of the local folder to contain the downloaded contents.

Examples

Connect to the National Geophysical Data Center (NGDC) FTP server and retrieve the file `README.txt` into the current MATLAB folder:

```
ngdc = ftp('ftp.ngdc.noaa.gov');
mget(ngdc,'README.txt');
close(ngdc);
```

FTP service courtesy of the NGDC. See NGDC Privacy Policy, Disclaimer, and Copyright for NGDC terms of service.

See Also

mput | cd | ftp

Introduced before R2006a

milliseconds

Duration in milliseconds

Syntax

```
MS = milliseconds(X)
```

Description

`MS = milliseconds(X)` returns an array of milliseconds equivalent to the values in `X`.

- If `X` is a numeric array, then `MS` is a `duration` array in units of milliseconds.
- If `X` is a `duration` array, then `MS` is a `double` array with each element equal to the number of milliseconds in the corresponding element of X.

Examples

Create Duration Array of Milliseconds

```
X = magic(3);
MS = milliseconds(X)
```

```
MS = 3×3 duration array
   0.008 sec   0.001 sec   0.006 sec
   0.003 sec   0.005 sec   0.007 sec
   0.004 sec   0.009 sec   0.002 sec
```

Convert Durations to Numeric Array of Milliseconds

Create a `duration` array.

```
X = minutes(2) + seconds(1:3)
```

```
X = 1×3 duration array
   2.0167 min   2.0333 min     2.05 min
```

Convert each duration in `X` to a number of milliseconds.

```
MS = milliseconds(X)
```

```
MS =

      121000       122000       123000
```

`MS` is a `double` array.

Input Arguments

X — Input array

numeric array | duration array | logical array

Input array, specified as a numeric array, duration array, or logical array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`duration`

Introduced in R2015a

min

Smallest elements in array

Syntax

```
M = min(A)
M = min(A,[],dim)
[M,I] = min( ___ )
```

```
C = min(A,B)
```

```
___ = min( ___ ,nanflag)
```

Description

`M = min(A)` returns the smallest elements of `A`.

- If `A` is a vector, then `min(A)` returns the smallest element of `A`.
- If `A` is a matrix, then `min(A)` is a row vector containing the minimum value of each column.
- If `A` is a multidimensional array, then `min(A)` operates along the first array dimension whose size does not equal `1`, treating the elements as vectors. The size of this dimension becomes `1` while the sizes of all other dimensions remain the same. If `A` is an empty array with first dimension `0`, then `min(A)` returns an empty array with the same size as `A`.

`M = min(A,[],dim)` returns the smallest elements along dimension `dim`. For example, if `A` is a matrix, then `min(A,[],2)` is a column vector containing the minimum value of each row.

`[M,I] = min( ___ )` finds the indices of the minimum values of `A` and returns them in output vector `I`, using any of the input arguments in the previous syntaxes. If the minimum value occurs more than once, then `min` returns the index corresponding to the first occurrence.

`C = min(A,B)` returns an array with the smallest elements taken from `A` or `B`.

`___ = min(___,nanflag)` specifies whether to include or omit `NaN` values in the calculation for any of the previous syntaxes. For the single input case, to specify `nanflag` without specifying `dim`, use `min(A,[],nanflag)`. For example, `min(A,[],'includenan')` includes all `NaN` values in `A` while `min(A,[],'omitnan')` ignores them.

Examples

Smallest Vector Element

Create a vector and compute its smallest element.

```
A = [23 42 37 15 52];
M = min(A)
```

```
M = 15
```

Smallest Complex Element

Create a complex vector and compute its smallest element, that is, the element with the smallest magnitude.

```
A = [-2+2i 4+i -1-3i];
min(A)
```

```
ans =
  -2.0000 + 2.0000i
```

Smallest Element in Each Matrix Column

Create a matrix and compute the smallest element in each column.

```
A = [2 8 4; 7 3 9]
```

```
A =

     2     8     4
     7     3     9
```

```
M = min(A)
```

```
M =

     2     3     4
```

Smallest Element in Each Matrix Row

Create a matrix and compute the smallest element in each row.

```
A = [1.7 1.2 1.5; 1.3 1.6 1.99]
```

```
A =

    1.7000    1.2000    1.5000
    1.3000    1.6000    1.9900
```

```
M = min(A,[],2)
```

```
M =

    1.2000
    1.3000
```

Smallest Element Indices

Create a matrix A and compute the smallest elements in each column as well as the row indices of A in which they appear.

```
A = [1 9 -2; 8 4 -5]
```

```
A =

     1     9    -2
     8     4    -5
```

```
[M,I] = min(A)
```

```
M =
```

```
     1     4    -5

I =

     1     2     2
```

Smallest Element Comparison

Create a matrix and return the smallest value between each of its elements compared to a scalar.

```
A = [1 7 3; 6 2 9]

A =

     1     7     3
     6     2     9


B = 5;
C = min(A,B)

C =

     1     5     3
     5     2     5
```

Smallest Element in Matrix

Create a matrix `A` and use its column representation, `A(:)`, to find the value and index of the smallest element.

```
A = [8 2 4; 7 3 9]

A =

     8     2     4
     7     3     9
```

```
A(:)
```

```
ans =

     8
     7
     2
     3
     4
     9
```

```
[M,I] = min(A(:))
```

```
M = 2

I = 3
```

`I` is the index of `A(:)` containing the smallest element.

Now, use the `ind2sub` function to extract the row and column indices of `A` corresponding to the smallest element.

```
[I_row, I_col] = ind2sub(size(A),I)
```

```
I_row = 1

I_col = 2
```

If you need only the minimum value of `A` and not its index, call the `min` function twice.

```
M = min(min(A))
```

```
M = 2
```

Smallest Element Involving `NaN`

Create a vector and compute its minimum, excluding `NaN` values.

```
A = [1.77 -0.005 3.98 -2.95 NaN 0.34 NaN 0.19];
M = min(A,[],'omitnan')
```

```
M = -2.9500
```

`min(A)` will also produce this result since `'omitnan'` is the default option.

Use the `'includenan'` flag to return `NaN`.

```
M = min(A,[],'includenan')
```

```
M = NaN
```

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

- If `A` is complex, then `min(A)` returns the complex number with the smallest magnitude. If magnitudes are equal, then `min(A)` returns the value with the smallest magnitude and the smallest phase angle.
- If `A` is a scalar, then `min(A)` returns `A`.
- If `A` is a 0-by-0 empty array, then `min(A)` is as well.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension whose length reduces to `1`. The `size(M,dim)` is `1`, while the sizes of all other dimensions remain the same, unless `size(A,dim)` is `0`. If `size(A,dim)` is `0`, then `min(A,dim)` returns an empty array with the same size as `A`.

Consider a two-dimensional input array, `A`:

- If `dim = 1`, then `min(A,[],1)` returns a row vector containing the smallest element in each column.



min(A,[],1)

- If `dim = 2`, then `min(A,[],2)` returns a column vector containing the smallest element in each row.

min(A,[],2)

`min` returns `A` if `dim` is greater than `ndims(A)`.

B — Additional input array

scalar | vector | matrix | multidimensional array

Additional input array, specified as a scalar, vector, matrix, or multidimensional array. Numeric inputs `A` and `B` must either be the same size or have sizes that are compatible (for example, `A` is an `M`-by-`N` matrix and `B` is a scalar or `1`-by-`N` row vector). For more information, see “Compatible Array Sizes for Basic Operations”.

If `A` and `B` are datetime, duration, or categorical arrays, then they must be the same size unless one is a scalar.

- A and B must be the same data type unless one is a double. In that case, the data type of the other array can be single, duration, or any integer type.
- If A and B are ordinal categorical arrays, they must have the same sets of categories with the same order.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | categorical | datetime | duration
Complex Number Support: Yes

nanflag — NaN condition

'omitnan' (default) | 'includenan'

NaN condition, specified as one of these values:

- 'omitnan' — Ignore all NaN values in the input.
- 'includenan' — Include the NaN values in the input for the calculation.

For datetime arrays, you can also use 'omitnat' or 'includenat' to omit and include NaT values, respectively.

The min function does not support the nanflag option for categorical arrays.

Data Types: char

Output Arguments

M — Minimum values

scalar | vector | matrix | multidimensional array

Minimum values, returned as a scalar, vector, matrix, or multidimensional array. size(M,dim) is 1, while the sizes of all other dimensions match the size of the corresponding dimension in A, unless size(A,dim) is 0. If size(A,dim) is 0, then M is an empty array with the same size as A.

I — Index to minimum values of A

scalar | vector | matrix | multidimensional array

Index to minimum values of A, returned as a scalar, vector, matrix, or multidimensional array. I is the same size as M. If the smallest element occurs more than once, then I contains the index to the first occurrence of the value.

C — Minimum elements from A or B
scalar | vector | matrix | multidimensional array

Minimum elements from A or B, returned as a scalar, vector, matrix, or multidimensional array. The size of C is determined by implicit expansion of the dimensions of A and B. For more information, see "Compatible Array Sizes for Basic Operations".

The data type of C depends on the data types of A and B:

- If A and B are the same data type, then C matches the data type of A and B.
- If either A or B is `single`, then C is `single`.
- If either A or B is an integer data type with the other a scalar `double`, then C assumes the integer data type.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

- The two-output syntax `[Y,I] = min(...)` is not supported.

For more information, see "Tall Arrays".

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you specify `dim`, then it must be a constant.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

- See “Code Generation for Complex Data with Zero-Valued Imaginary Parts” (MATLAB Coder).

See Also

See Also

`max` | `mean` | `median` | `sort`

Topics

“Matrix Indexing”

Introduced before R2006a

MinimizeCommandWindow

Minimize size of Automation server window

Syntax

IDL Method Signature

```
HRESULT MinimizeCommandWindow(void)
```

Microsoft Visual Basic Client

```
MinimizeCommandWindow
```

MATLAB Client

```
MinimizeCommandWindow(h)
```

Description

`MinimizeCommandWindow(h)` minimizes the window for the server attached to handle `h`, and makes it inactive.

If the server window was already in a minimized state, `MinimizeCommandWindow` does nothing.

Examples

From a Visual Basic .NET client, modify the size of the command window in a MATLAB Automation server.

```
Dim Matlab As Object

Matlab = CreateObject("matlab.application")
Matlab.MinimizeCommandWindow
```

```
'Now return the server window to its former state on
'the desktop and make it the currently active window.

Matlab.MaximizeCommandWindow
```

See Also

MaximizeCommandWindow

Topics

Introduced before R2006a

minres

Minimum residual method

Syntax

```
x = minres(A,b)
minres(A,b,tol)
minres(A,b,tol,maxit)
minres(A,b,tol,maxit,M)
minres(A,b,tol,maxit,M1,M2)
minres(A,b,tol,maxit,M1,M2,x0)
[x,flag] = minres(A,b,...)
[x,flag,relres] = minres(A,b,...)
[x,flag,relres,iter] = minres(A,b,...)
[x,flag,relres,iter,resvec] = minres(A,b,...)
[x,flag,relres,iter,resvec,resveccg] = minres(A,b,...)
```

Description

`x = minres(A,b)` attempts to find a minimum norm residual solution `x` to the system of linear equations `A*x=b`. The `n`-by-`n` coefficient matrix `A` must be symmetric but need not be positive definite. It should be large and sparse. The column vector `b` must have length `n`. You can specify `A` as a function handle, `afun`, such that `afun(x)` returns `A*x`.

"Parameterizing Functions" explains how to provide additional parameters to the function `afun`, as well as the preconditioner function `mfun` described below, if necessary.

If `minres` converges, a message to that effect is displayed. If `minres` fails to converge after the maximum number of iterations or halts for any reason, a warning message is printed displaying the relative residual `norm(b-A*x)/norm(b)` and the iteration number at which the method stopped or failed.

`minres(A,b,tol)` specifies the tolerance of the method. If `tol` is `[]`, then `minres` uses the default, `1e-6`.

`minres(A,b,tol,maxit)` specifies the maximum number of iterations. If `maxit` is `[]`, then `minres` uses the default, `min(n,20)`.

`minres(A,b,tol,maxit,M)` and `minres(A,b,tol,maxit,M1,M2)` use symmetric positive definite preconditioner `M` or `M = M1*M2` and effectively solve the system `inv(sqrt(M))*A*inv(sqrt(M))*y = inv(sqrt(M))*b` for `y` and then return `x = inv(sqrt(M))*y`. If `M` is `[]` then `minres` applies no preconditioner. `M` can be a function handle `mfun`, such that `mfun(x)` returns `M\x`.

`minres(A,b,tol,maxit,M1,M2,x0)` specifies the initial guess. If `x0` is `[]`, then `minres` uses the default, an all-zero vector.

`[x,flag] = minres(A,b,...)` also returns a convergence flag.

Flag	Convergence
0	`minres` converged to the desired tolerance `tol` within `maxit` iterations.
1	`minres` iterated `maxit` times but did not converge.
2	Preconditioner `M` was ill-conditioned.
3	`minres` stagnated. (Two consecutive iterates were the same.)
4	One of the scalar quantities calculated during `minres` became too small or too large to continue computing.

Whenever `flag` is not `0`, the solution `x` returned is that with minimal norm residual computed over all the iterations. No messages are displayed if the `flag` output is specified.

`[x,flag,relres] = minres(A,b,...)` also returns the relative residual `norm(b-A*x)/norm(b)`. If `flag` is `0`, `relres <= tol`.

`[x,flag,relres,iter] = minres(A,b,...)` also returns the iteration number at which `x` was computed, where `0 <= iter <= maxit`.

`[x,flag,relres,iter,resvec] = minres(A,b,...)` also returns a vector of estimates of the `minres` residual norms at each iteration, including `norm(b-A*x0)`.

`[x,flag,relres,iter,resvec,resveccg] = minres(A,b,...)` also returns a vector of estimates of the Conjugate Gradients residual norms at each iteration.

Examples

Using minres with a Matrix Input

```
n = 100; on = ones(n,1);
A = spdiags([-2*on 4*on -2*on],-1:1,n,n);
b = sum(A,2);
tol = 1e-10;
maxit = 50;
M1 = spdiags(4*on,0,n,n);

x = minres(A,b,tol,maxit,M1);
minres converged at iteration 49 to a solution with relative
residual 4.7e-014
```

Using minres with a Function Handle

This example replaces the matrix `A` in the previous example with a handle to a matrix-vector product function `afun`. The example is contained in a file `run_minres` that

- Calls `minres` with the function handle `@afun` as its first argument.
- Contains `afun` as a nested function, so that all variables in `run_minres` are available to `afun`.

The following shows the code for `run_minres`:

```
function x1 = run_minres
n = 100;
on = ones(n,1);
A = spdiags([-2*on 4*on -2*on],-1:1,n,n);
b = sum(A,2);
tol = 1e-10;
maxit = 50;
M = spdiags(4*on,0,n,n);
x1 = minres(@afun,b,tol,maxit,M);

       function y = afun(x)
          y = 4 * x;
          y(2:n) = y(2:n) - 2 * x(1:n-1);
          y(1:n-1) = y(1:n-1) - 2 * x(2:n);
       end
```

```
end
```

When you enter

```
x1=run_minres;
```

MATLAB software displays the message

```
minres converged at iteration 49 to a solution with relative
residual 4.7e-014
```

Using minres instead of pcg

Use a symmetric indefinite matrix that fails with `pcg`.

```
A = diag([20:-1:1, -1:-1:-20]);
b = sum(A,2);      % The true solution is the vector of all ones.
x = pcg(A,b);      % Errors out at the first iteration.
```

displays the following message:

```
pcg stopped at iteration 1 without converging to the desired
tolerance 1e-006 because a scalar quantity became too small or
too large to continue computing.
The iterate returned (number 0) has relative residual 1
```

However, `minres` can handle the indefinite matrix `A`.

```
x = minres(A,b,1e-6,40);
minres converged at iteration 39 to a solution with relative
residual 1.3e-007
```

References

[1] Barrett, R., M. Berry, T. F. Chan, et al., *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*, SIAM, Philadelphia, 1994.

[2] Paige, C. C. and M. A. Saunders, “Solution of Sparse Indefinite Systems of Linear Equations.” *SIAM J. Numer. Anal.*, Vol.12, 1975, pp. 617-629.

See Also

See Also

`bicg` | `bicgstab` | `cgs` | `gmres` | `ichol` | `lsqr` | `mldivide` | `pcg` | `qmr` | `symmlq`

Topics

"Create Function Handle"

Introduced before R2006a

minus, -

Subtraction

Syntax

```
C = A - B
C = minus(A,B)
```

Description

`C = A - B` subtracts array `B` from array `A` and returns the result in `C`.

`C = minus(A,B)` is an alternate way to execute `A - B`, but is rarely used. It enables operator overloading for classes.

Examples

Subtract Scalar from Array

Create an array, `A`, and subtract a scalar value from it.

```
A = [2 1; 3 5];
C = A - 2
```

```
C =

     0    -1
     1     3
```

The scalar is subtracted from each entry of `A`.

Subtract Two Arrays

Create two arrays, `A` and `B`, and subtract the second, `B`, from the first, `A`.

```
A = [1 0; 2 4];
B = [5 9; 2 1];
```

```
C = A - B
```

```
C =

    -4    -9
     0     3
```

The elements of B are subtracted from the corresponding elements of A.

Use the syntax -C to negate the elements of C.

```
-C
```

```
ans =

     4     9
     0    -3
```

Subtract Mean from Matrix

Create a matrix, A. Scale the elements in each column by subtracting the mean.

```
A = [1 9 3; 2 7 8]
```

```
A =

     1     9     3
     2     7     8
```

```
A - mean(A)
```

```
ans =

   -0.5000    1.0000   -2.5000
    0.5000   -1.0000    2.5000
```

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. Numeric inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Datetime, duration, and calendar duration arrays must be the same size unless one is a scalar. If one input is a datetime array, duration array, or calendar duration array, then numeric values in the other input are treated as a number of 24-hour days. If one input is a datetime array, then the other input also can be a date string or a cell array containing date strings.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

B — Input array
scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. Numeric inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Datetime, duration, and calendar duration arrays must be the same size unless one is a scalar. If one input is a datetime array, duration array, or calendar duration array, then numeric values in the other input are treated as a number of 24-hour days. If one input is a datetime array, then the other input also can be a date string or a cell array containing date strings.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`diff` | `plus` | `uminus`

Topics

“Array vs. Matrix Operations”
“Operator Precedence”
“MATLAB Operators and Special Characters”

Introduced before R2006a

minute

Minute number

Syntax

```
m = minute(t)
```

Description

`m = minute(t)` returns the minute numbers of the datetime values in `t`. The `m` output is a `double` array the same size as `t` and contains integer values from 0 to 59.

The `minute` function returns the minute numbers of datetime values. To assign minute values to a datetime array, `t`, use `t.Minute` and modify the Minute property.

Examples

Find Minute Number of Datetime Values

```
t1 = datetime('now');
t = t1 + minutes(2:4)
```

```
t = 1×3 datetime array
   24-Feb-2017 13:52:49   24-Feb-2017 13:53:49   24-Feb-2017 13:54:49
```

```
m = minute(t)
```

```
m =

    52    53    54
```

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

datetime Properties | `hms` | `hour` | `second` | `timeofday`

Introduced in R2014b

minutes

Duration in minutes

Syntax

```
M = minutes(X)
```

Description

`M = minutes(X)` returns an array of minutes equivalent to the values in `X`.

- If `X` is a numeric array, then `M` is a `duration` array in units of minutes.
- If `X` is a `duration` array, then `M` is a `double` array with each element equal to the number of minutes in the corresponding element of `X`.

The `minutes` function converts between `duration` and `double` values. To display a duration in units of minutes, set its `Format` property to `'m'`.

Examples

Create Duration Array of Minutes

```
X = magic(4);
M = minutes(X)
```

```
M = 4×4 duration array
   16 min    2 min    3 min   13 min
    5 min   11 min   10 min    8 min
    9 min    7 min    6 min   12 min
    4 min   14 min   15 min    1 min
```

Convert Durations to Numeric Array of Minutes

Create a `duration` array.

```
X = hours(2:10:38) + minutes(30)
```

```
X = 1×4 duration array
    2.5 hr   12.5 hr   22.5 hr   32.5 hr
```

Convert each duration in X to a number of minutes.

```
M = minutes(X)
```

```
M =

         150         750        1350        1950
```

View the data type of M.

```
whos M
```

```
  Name      Size            Bytes  Class     Attributes

  M         1x4                32  double
```

Input Arguments

X — Input array
numeric array | duration array | logical array

Input array, specified as a numeric array, duration array, or logical array.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`duration`

Introduced in R2014b

mislocked

Determine if function is locked in memory

Syntax

```
mislocked
mislocked(fun)
```

Description

`mislocked` by itself returns logical `1` (`true`) if the currently running function is locked in memory, and logical `0` (`false`) otherwise. Functions that are locked cannot be removed with the `clear` function unless you first unlock them using the `munlock` function. You can use locking on functions that reside in MATLAB `.m` files or `.mex` files.

`mislocked(fun)` returns logical `1` (`true`) if the function named *`fun`* is locked in memory, and logical `0` (`false`) otherwise.

See Also

`mlock` | `munlock` | `inmem`

Introduced before R2006a

missing

Create missing values

Syntax

```
m = missing
```

Description

`m = missing` returns a missing value displayed as `<missing>`. You can set an element of an array or table to `missing` to represent missing data. The value of `missing` is then automatically converted to the standard missing value native to the data type of the array or table variable. For example, core data types that support `missing` and their corresponding standard missing values after assignment are as follows:

- `double`, `single`, `duration`, and `calendarDuration` convert `missing` to `NaN`
- `datetime` converts `missing` to `NaT`
- `categorical` converts `missing` to `<undefined>`
- `string` converts `missing` to `<missing>`

Examples

Missing Data in Timetable

Create a timetable containing weather data, and replace the last row with missing values. Each `missing` value is automatically replaced with the standard missing value for the relevant data type.

```
Time = datetime({'2015-12-18 08:03:05';'2015-12-18 10:03:17';'2015-12-18 12:03:13'});
Temp = [37.3;39.1;42.3];
WindDirection = categorical({'NW';'N';'NW'});
TT = timetable(Time,Temp,WindDirection)
```

```
TT = 3×2 timetable
            Time            Temp    WindDirection
```

```
    ____________________    ____    _____________

    18-Dec-2015 08:03:05    37.3    NW
    18-Dec-2015 10:03:17    39.1    N
    18-Dec-2015 12:03:13    42.3    NW
```

```
TT.Time(3) = missing;
TT.Temp(3) = missing;
TT.WindDirection(3) = missing;

TT
```

```
TT = 3×2 timetable
            Time            Temp    WindDirection
    ____________________    ____    _____________

    18-Dec-2015 08:03:05    37.3    NW
    18-Dec-2015 10:03:17    39.1    N
    NaT                      NaN    <undefined>
```

See Also

See Also

`fillmissing` | `ismissing` | `standardizeMissing`

Introduced in R2017a

mkdir

Make new folder

Syntax

```
mkdir folderName
mkdir parentFolder folderName

status = mkdir( ___ )
[status,msg] = mkdir( ___ )
[status,msg,msgID] = mkdir( ___ )
```

Description

`mkdir folderName` creates the folder `folderName`. If `folderName` exists, MATLAB issues a warning. If the operation is not successful, `mkdir` throws an error to the Command Window.

`mkdir parentFolder folderName` creates the folder `folderName` in `parentFolder`. If `parentFolder` does not exist, MATLAB attempts to create it.

`status = mkdir( ___ )` creates the specified folder and returns a status of `1` if the operation is successful or if the folder exists. Otherwise, it returns `0`. Warnings and errors are not thrown to the Command Window. You can use this syntax with any of the input argument combinations in the previous syntaxes.

`[status,msg] = mkdir( ___ )` also returns the message text for any warning or error that occurs. You can use this syntax with any of the input argument combinations in the previous syntaxes.

`[status,msg,msgID] = mkdir( ___ )` also returns the message ID for any warning or error that occurs. You can use this syntax with any of the input argument combinations in the previous syntaxes.

Examples

Create a Subfolder in the Current Folder

Create a folder called `newdir` in the current folder.

```
mkdir newdir
```

Create a Subfolder in the Specified Parent Folder

Create a folder called `newfolder` in the folder `testdata`, using a relative path, where `newFolder` is at the same level as the current folder.

```
mkdir ../testdata newFolder
```

Create a Folder that Already Exists

Create the same folder twice, verifying the status of the operation after each try.

Create the folder `newFolder`. The operation succeeds, returning a status of 1, and no error or warning message.

```
[status, msg, msgID] = mkdir('newFolder')
```

```
status = logical
   1


msg =

  0×0 empty char array

msgID =

  0×0 empty char array
```

Create the folder `newFolder` once again. The operation once again succeeds, returning a status of 1. A warning message and message ID inform you that the folder already exists.

```
[status, msg, msgID] = mkdir('newFolder')
```

```
status = logical
   1
```

```
msg =
'Directory already exists.'

msgID =
'MATLAB:MKDIR:DirectoryExists'
```

Input Arguments

`folderName` — Name of the folder to create

character vector

Name of the folder to create, specified as a character vector. `folderName` can be specified as an absolute or relative path, unless a parent folder is specified. If a parent folder is specified, `folderName` must be a path relative to the parent folder.

If `folderName` specifies a path that includes one or more nonexistent folders, MATLAB attempts to create the nonexistent folder. For example, for the path `myFolder\folder1\folder2\targetFolder`, if `folder1` does not exist, MATLAB creates `folder1`, creates `folder2` within `folder1`, and creates `targetFolder` within `folder2`.

`parentFolder` — Name of the parent in which to create the specified folder

character vector

Name of the parent in which to create the specified folder, specified as a character vector. `parentFolder` can be specified as an absolute or relative path. If `parentFolder` does not exist, MATLAB attempts to create it.

Output Arguments

`status` — Indication of whether the attempt to create the folder is successful

0 | 1

Indication of whether the attempt to create the folder is successful, specified as `0` or `1`. If the attempt is successful or the folder exists, `status` is 1. Otherwise, `status` is 0.

Data Types: `logical`

`msg` — Error message

character vector

Error message, specified as a character vector. If an error or warning occurs, `msg` contains the message text of the error or warning. Otherwise, `msg` is empty, `''`.

`msgID` — Error message identifier

character vector

Error message identifier, specified as a character vector. If an error or warning occurs, `msgID` contains the message identifier of the error or warning. Otherwise, `msgID` is empty, `''`.

See Also

See Also

`cd` | `copyfile` | `dir` | `movefile` | `rmdir`

Topics

"Manage Files and Folders"

Introduced before R2006a

mkdir

Class: FTP

Create folder on FTP server

Syntax

```
mkdir(ftpobj,folder)
```

Description

`mkdir(ftpobj,folder)` creates the specified folder on the FTP server associated with `ftpobj`.

Input Arguments

ftpobj

FTP object created by ftp.

folder

Character vector enclosed in single quotation marks that specifies a path relative to the current folder on the FTP server.

Examples

Suppose that a hypothetical host, `ftp.testsite.com`, contains a folder named `testfolder`. Connect to the server and add a subfolder:

```
ts = ftp('ftp.testsite.com');
mkdir(ts,'testfolder/newfolder');
close(ts);
```

See Also

rmdir | dir | ftp

Introduced before R2006a

mkpp

Make piecewise polynomial

Syntax

```
pp = mkpp(breaks,coefs)
pp = mkpp(breaks,coefs,d)
```

Description

`pp = mkpp(breaks,coefs)` builds a piecewise polynomial `pp` from its breaks and coefficients. Use `ppval` to evaluate the piecewise polynomial at specific points, or `unmkpp` to extract details about the piecewise polynomial.

`pp = mkpp(breaks,coefs,d)` specifies that the piecewise polynomial is vector-valued, such that the value of each of its coefficients is a vector of length `d`.

Examples

Create Piecewise Polynomial

Create a piecewise polynomial that has a cubic polynomial in the interval [0,4], a quadratic polynomial in the interval [4,10], and a quartic polynomial in the interval [10,15].

```
breaks = [0 4 10 15];
coefs = [0 1 -1 1 1; 0 0 1 -2 53; -1 6 1 4 77];
pp = mkpp(breaks,coefs)
```

```
pp = struct with fields:
      form: 'pp'
    breaks: [0 4 10 15]
     coefs: [3×5 double]
    pieces: 3
     order: 5
       dim: 1
```

Evaluate the piecewise polynomial at many points in the interval [0,15] and plot the results. Plot vertical dashed lines at the break points where the polynomials meet.

```
xq = 0:0.01:15;
plot(xq,ppval(pp,xq))
line([4 4],ylim,'LineStyle','--','Color','k')
line([10 10],ylim,'LineStyle','--','Color','k')
```

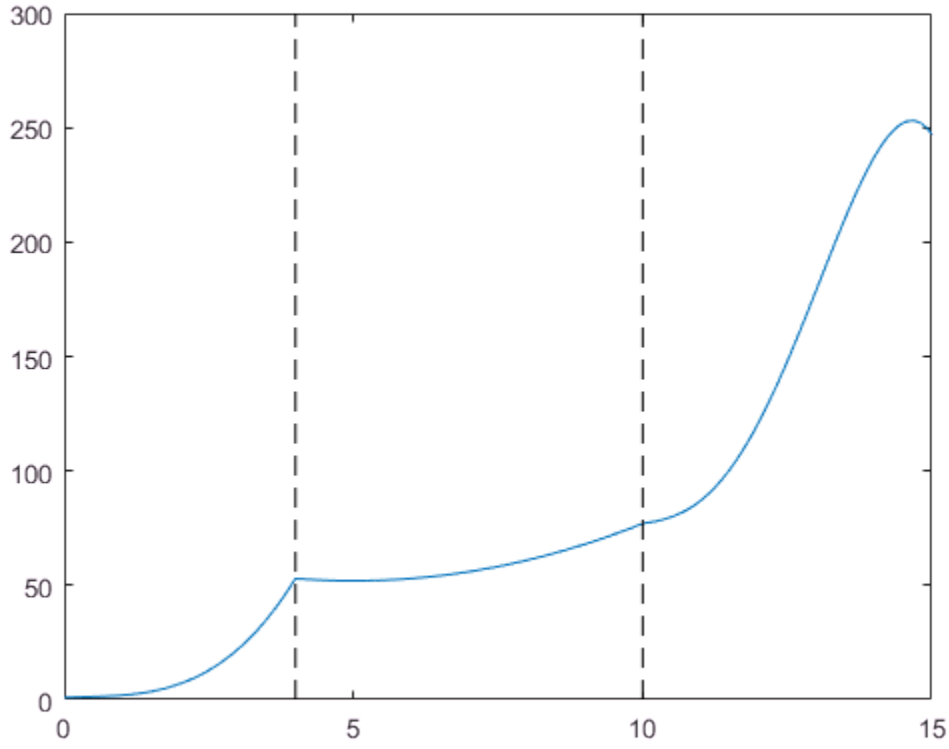

Construct and Plot Piecewise Polynomial

Create two quadratic polynomials, evaluate them at several query points, and plot the results. Then create a single piecewise polynomial with four intervals that alternate between the two quadratic polynomials.

The first two plots show a quadratic polynomial and its negation shifted to the intervals [-8,-4] and [-4,0]. The polynomial is

$$1 - \left(\frac{x}{2} - 1\right)^2 = \frac{-x^2}{4} + x.$$

The last plot shows a piecewise polynomial constructed by alternating these two quadratic pieces over four intervals. It also shows its first derivative, which was constructed after breaking the piecewise polynomial apart using `unmkpp`.

```
subplot(2,2,1)
cc = [-1/4 1 0];
pp1 = mkpp([-8 -4],cc);
xx1 = -8:0.1:-4;
plot(xx1,ppval(pp1,xx1),'k-')

subplot(2,2,2)
pp2 = mkpp([-4 0],-cc);
xx2 = -4:0.1:0;
plot(xx2,ppval(pp2,xx2),'k-')

subplot(2,1,2)
pp = mkpp([-8 -4 0 4 8],[cc;-cc;cc;-cc]);
xx = -8:0.1:8;
plot(xx,ppval(pp,xx),'k-')
[breaks,coefs,l,k,d] = unmkpp(pp);
dpp = mkpp(breaks,repmat(k-1:-1:1,d*l,1).*coefs(:,1:k-1),d);
hold on
plot(xx,ppval(dpp,xx),'r-')
hold off
```

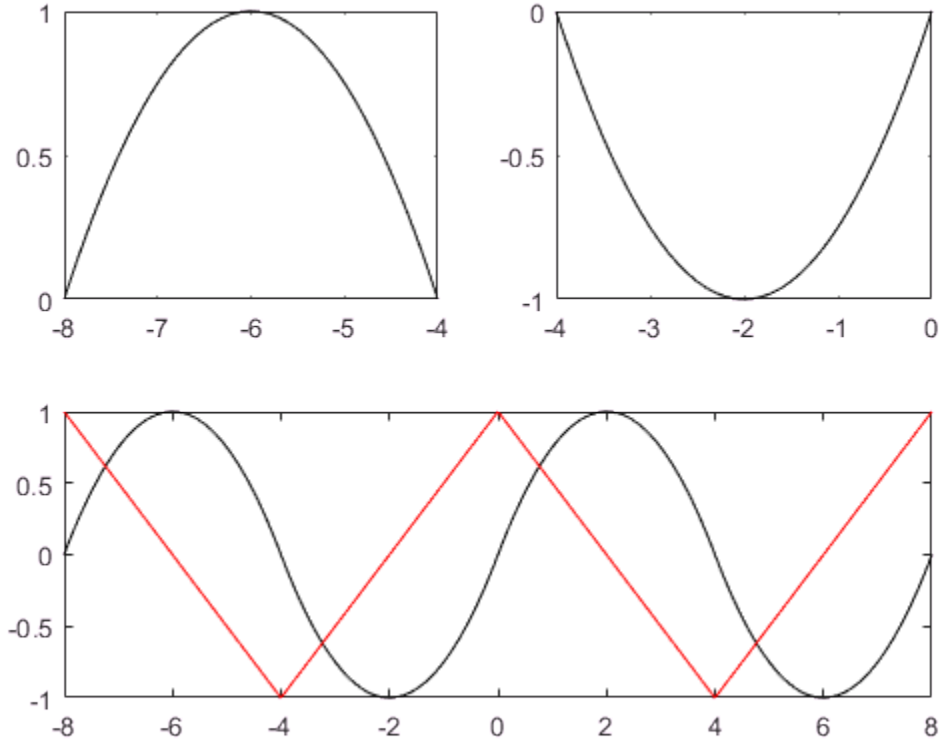

Input Arguments

`breaks` — Break points

vector

Break points, specified as a vector of length `L+1` with strictly increasing elements that represent the start and end of each of `L` intervals.

Data Types: `single` | `double`

`coefs` — Polynomial coefficients

matrix

Polynomial coefficients, specified as an `L`-by-`k` matrix with the ith row `coefs(i,:)` containing the local coefficients of an order `k` polynomial on the ith interval, `[breaks(i), breaks(i+1)]`. In other words, the polynomial is `coefs(i,1)*(X-breaks(i))^(k-1) + coefs(i,2)*(X-breaks(i))^(k-2) + ... + coefs(i,k-1)*(X-breaks(i)) + coefs(i,k)`.

Data Types: `single` | `double`

`d` — Dimension
scalar | vector

Dimension, specified as a scalar or vector of integers. Specify `d` to signify that the piecewise polynomial has coefficient values of size `d`.

Data Types: `single` | `double`

Output Arguments

`pp` — Piecewise polynomial
structure

Piecewise polynomial, returned as a structure. Use this structure with the `ppval` function to evaluate the piecewise polynomial at one or more query points. The structure has these fields.

Field	Description
`form`	`'pp'` for *piecewise polynomial*
`breaks`	Vector of length `L+1` with strictly increasing elements that represent the start and end of each of `L` intervals
`coefs`	`L`-by-`k` matrix with each row `coefs(i,:)` containing the local coefficients of an order `k` polynomial on the ith interval, `[breaks(i),breaks(i+1)]`
`pieces`	Number of pieces, `L`
`order`	Order of the polynomials
`dim`	Dimensionality of target

Since the polynomial coefficients in `coefs` are local coefficients for each interval, you must subtract the lower endpoint of the corresponding knot interval to use the coefficients in a conventional polynomial equation. In other words, for the coefficients `[a,b,c,d]` on the interval `[x1,x2]`, the corresponding polynomial is

$$f(x) = a(x - x_1)^3 + b(x - x_1)^2 + c(x - x_1) + d.$$

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The output structure `pp` differs from the `pp` structure in MATLAB. In MATLAB, `ppval` cannot use the `pp` structure from the code generator. For code generation, `ppval` cannot use a `pp` structure created by MATLAB. `unmkpp` can use a MATLAB `pp` structure for code generation.

  To create a MATLAB `pp` structure from a `pp` structure created by the code generator:

  - In code generation, use `unmkpp` to return the piecewise polynomial details to MATLAB.
  - In MATLAB, use `mkpp` to create the `pp` structure.
- If you do not provide `d`, then `coefs` must be two-dimensional and have a fixed number of columns. In this case, the number of columns is the order.
- To define a piecewise constant polynomial, `coefs` must be a column vector or `d` must have at least two elements.
- If you provide `d` and `d` is `1`, then `d` must be a constant. Otherwise, if the input to `ppval` is nonscalar, then the shape of the output of `ppval` can differ from `ppval` in MATLAB.
- If you provide `d`, then it must have a fixed length. One of the following sets of statements must be true:

  1 Suppose that `m = length(d)` and `npieces = length(breaks) - 1`.

```
size(coefs,j) = d(j)
size(coefs,m+1) = npieces
size(coefs,m+1) = order
```

j = 1,2,...,m. The dimension m+2 must be fixed length.

2 Suppose that m = length(d) and npieces = length(breaks) - 1.

```
size(coefs,1) = prod(d)*npieces
size(coefs,2) = order
```

The second dimension must be fixed length.

- If you do not provide d, then the following statements must be true:

  Suppose that m = length(d) and npieces = length(breaks) - 1.

  ```
  size(coefs,1) = prod(d)*npieces
  size(coefs,2) = order
  ```

  The second dimension must be fixed length.

See Also

See Also

pchip | ppval | spline | unmkpp

Introduced before R2006a

mldivide, \

Solve systems of linear equations $Ax = B$ for x

Syntax

```
x = A\B
x = mldivide(A,B)
```

Description

`x = A\B` solves the system of linear equations `A*x = B`. The matrices `A` and `B` must have the same number of rows. MATLAB displays a warning message if `A` is badly scaled or nearly singular, but performs the calculation regardless.

- If `A` is a scalar, then `A\B` is equivalent to `A.\B`.
- If `A` is a square `n`-by-`n` matrix and `B` is a matrix with `n` rows, then `x = A\B` is a solution to the equation `A*x = B`, if it exists.
- If `A` is a rectangular `m`-by-`n` matrix with `m ~= n`, and `B` is a matrix with `m` rows, then `A\B` returns a least-squares solution to the system of equations `A*x= B`.

`x = mldivide(A,B)` is an alternative way to execute `x = A\B`, but is rarely used. It enables operator overloading for classes.

Examples

System of Equations

Solve a simple system of linear equations, `A*x = B`.

```
A = magic(3);
B = [15; 15; 15];
x = A\B
```

```
x =

    1.0000
```

```
    1.0000
    1.0000
```

Linear System with Singular Matrix

Solve a linear system of equations `A*x = b` involving a singular matrix, `A`.

```
A = magic(4);
b = [34; 34; 34; 34];
x = A\b
```

```
Warning: Matrix is close to singular or badly scaled. Results may be inaccurate. RCOND

x =

    1.5000
    2.5000
   -0.5000
    0.5000
```

When `rcond` is between `0` and `eps`, MATLAB® issues a nearly singular warning, but proceeds with the calculation. When working with ill-conditioned matrices, an unreliable solution can result even though the residual `(b-A*x)` is relatively small. In this particular example, the norm of the residual is zero, and an exact solution is obtained, although `rcond` is small.

When `rcond` is equal to `0`, the singular warning appears.

```
A = [1 0; 0 0];
b = [1; 1];
x = A\b
```

```
Warning: Matrix is singular to working precision.

x =

     1
   Inf
```

In this case, division by zero leads to computations with `Inf` and/or `NaN`, making the computed result unreliable.

Least-Squares Solution of Underdetermined System

Solve a system of linear equations, `A*x = b`.

```
A = [1 2 0; 0 4 3];
b = [8; 18];
x = A\b
```

```
x =

         0
    4.0000
    0.6667
```

Linear System with Sparse Matrix

Solve a simple system of linear equations using sparse matrices.

Consider the matrix equation `A*x = B`.

```
A = sparse([0 2 0 1 0; 4 -1 -1 0 0; 0 0 0 3 -6; -2 0 0 0 2; 0 0 4 2 0]);
B = sparse([8; -1; -18; 8; 20]);
x = A\B
```

```
x =
   (1,1)        1.0000
   (2,1)        2.0000
   (3,1)        3.0000
   (4,1)        4.0000
   (5,1)        5.0000
```

Input Arguments

A — Coefficient matrix

vector | full matrix | sparse matrix

Coefficient matrix, specified as a vector, full matrix, or sparse matrix. If `A` has `m` rows, then `B` must have `m` rows.

Data Types: `single` | `double`
Complex Number Support: Yes

B — Right-hand side

vector | full matrix | sparse matrix

Right-hand side, specified as a vector, full matrix, or sparse matrix. If `B` has `m` rows, then `A` must have `m` rows.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

x — Solution

vector | full matrix | sparse matrix

Solution, returned as a vector, full matrix, or sparse matrix. If `A` is an `m`-by-`n` matrix and `B` is an `m`-by-`p` matrix, then `x` is an `n`-by-`p` matrix, including the case when `p==1`.

If `A` has full storage, `x` is also full. If `A` is sparse, then `x` has the same storage as `B`.

Tips

- If `A` is a square matrix, `A\B` is roughly equal to `inv(A)*B`, but MATLAB processes `A\B` differently and more robustly.
- If the rank of `A` is less than the number of columns in `A`, then `x = A\B` is not necessarily the minimum norm solution. The more computationally expensive `x = pinv(A)*B` computes the minimum norm least-squares solution.
- For full singular inputs, you can compute the least-squares solution using the function `linsolve`.

Algorithms

The versatility of `mldivide` in solving linear systems stems from its ability to take advantage of symmetries in the problem by dispatching to an appropriate solver. This

approach aims to minimize computation time. The first distinction the function makes is between *full* (also called "*dense*") and *sparse* input arrays.

Algorithm for Full Inputs

The flow chart below shows the algorithm path when inputs A and B are **full**.

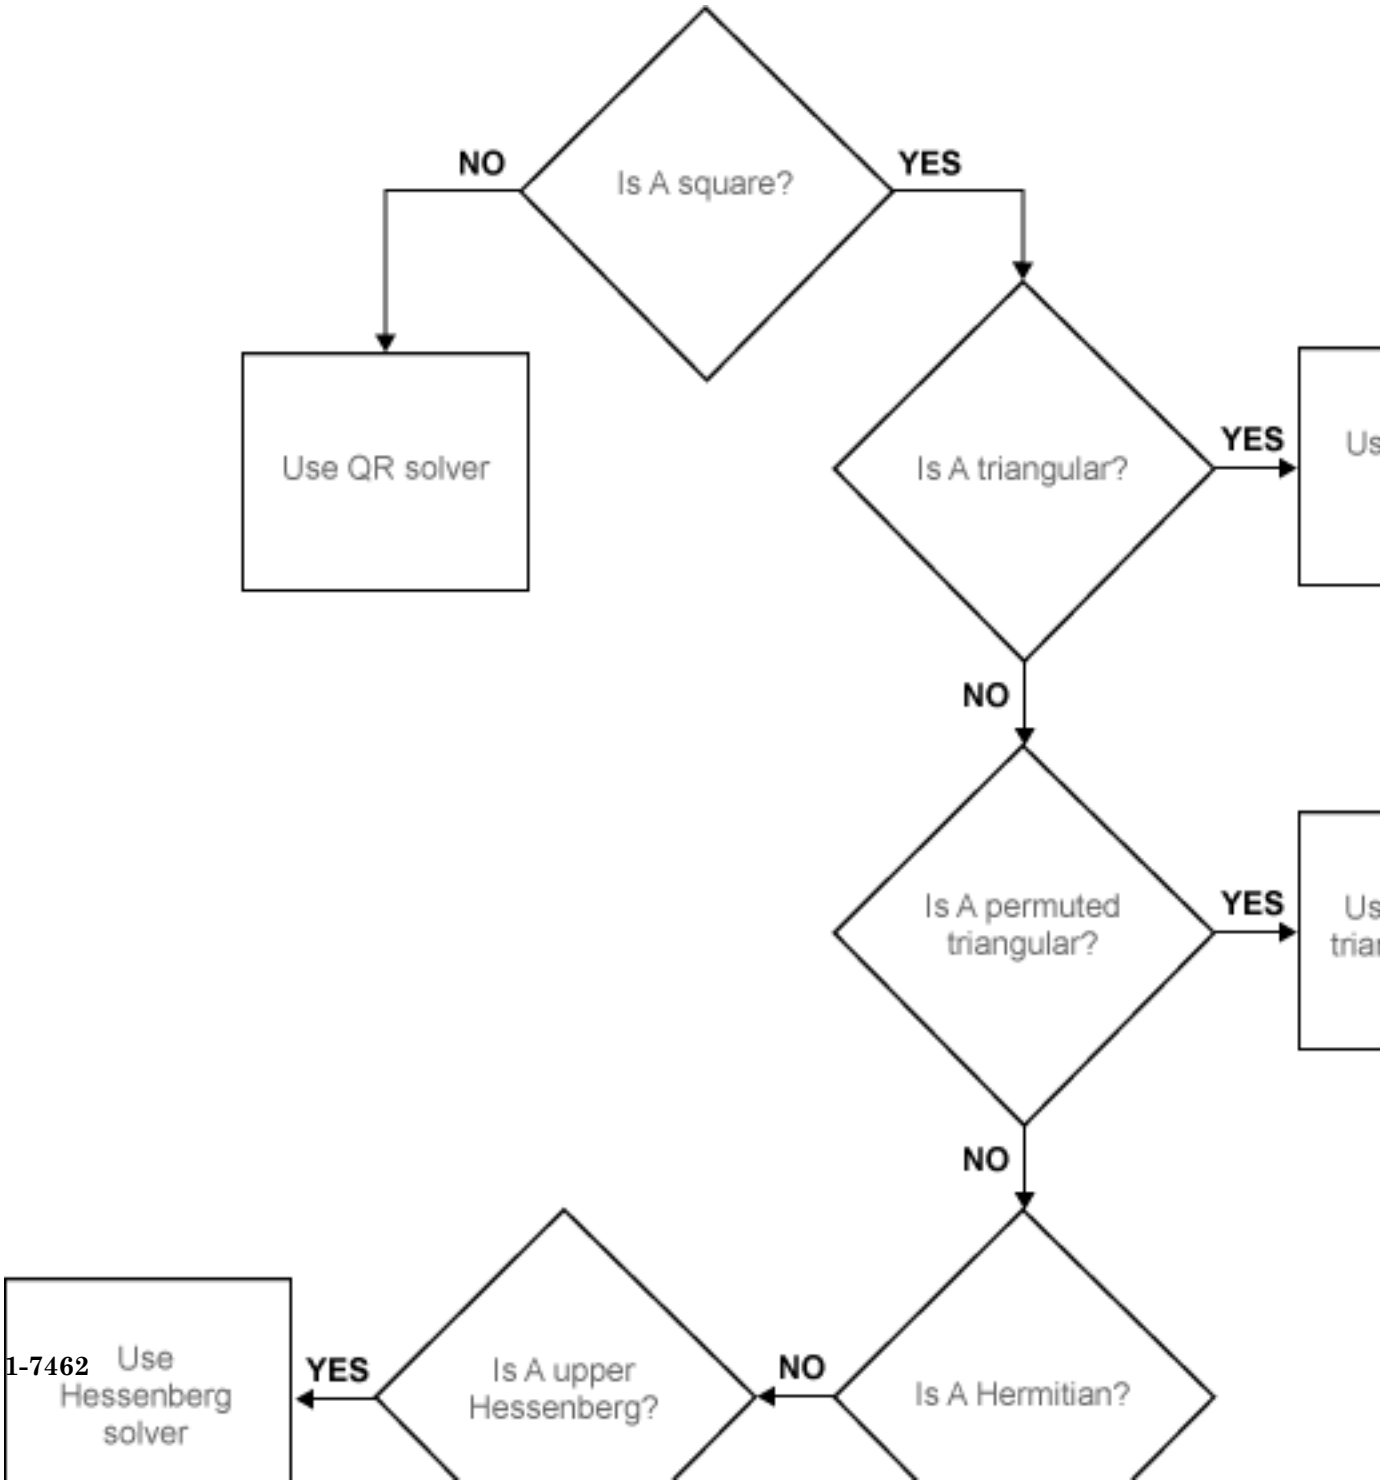
Is A square?
NO
YES
Use QR solver
Is A triangular?
YES
NO
Is A permuted triangular?
YES
NO
Is A Hermitian?
NO
Is A upper Hessenberg?
YES
Use Hessenberg solver

Algorithm for Sparse Inputs

If A is full and B is sparse then `mldivide` converts B to a full matrix and uses the full algorithm path (above) to compute a solution with full storage. If A is sparse, the storage of the solution x is the same as that of B and `mldivide` follows the algorithm path for **sparse** inputs, shown below.

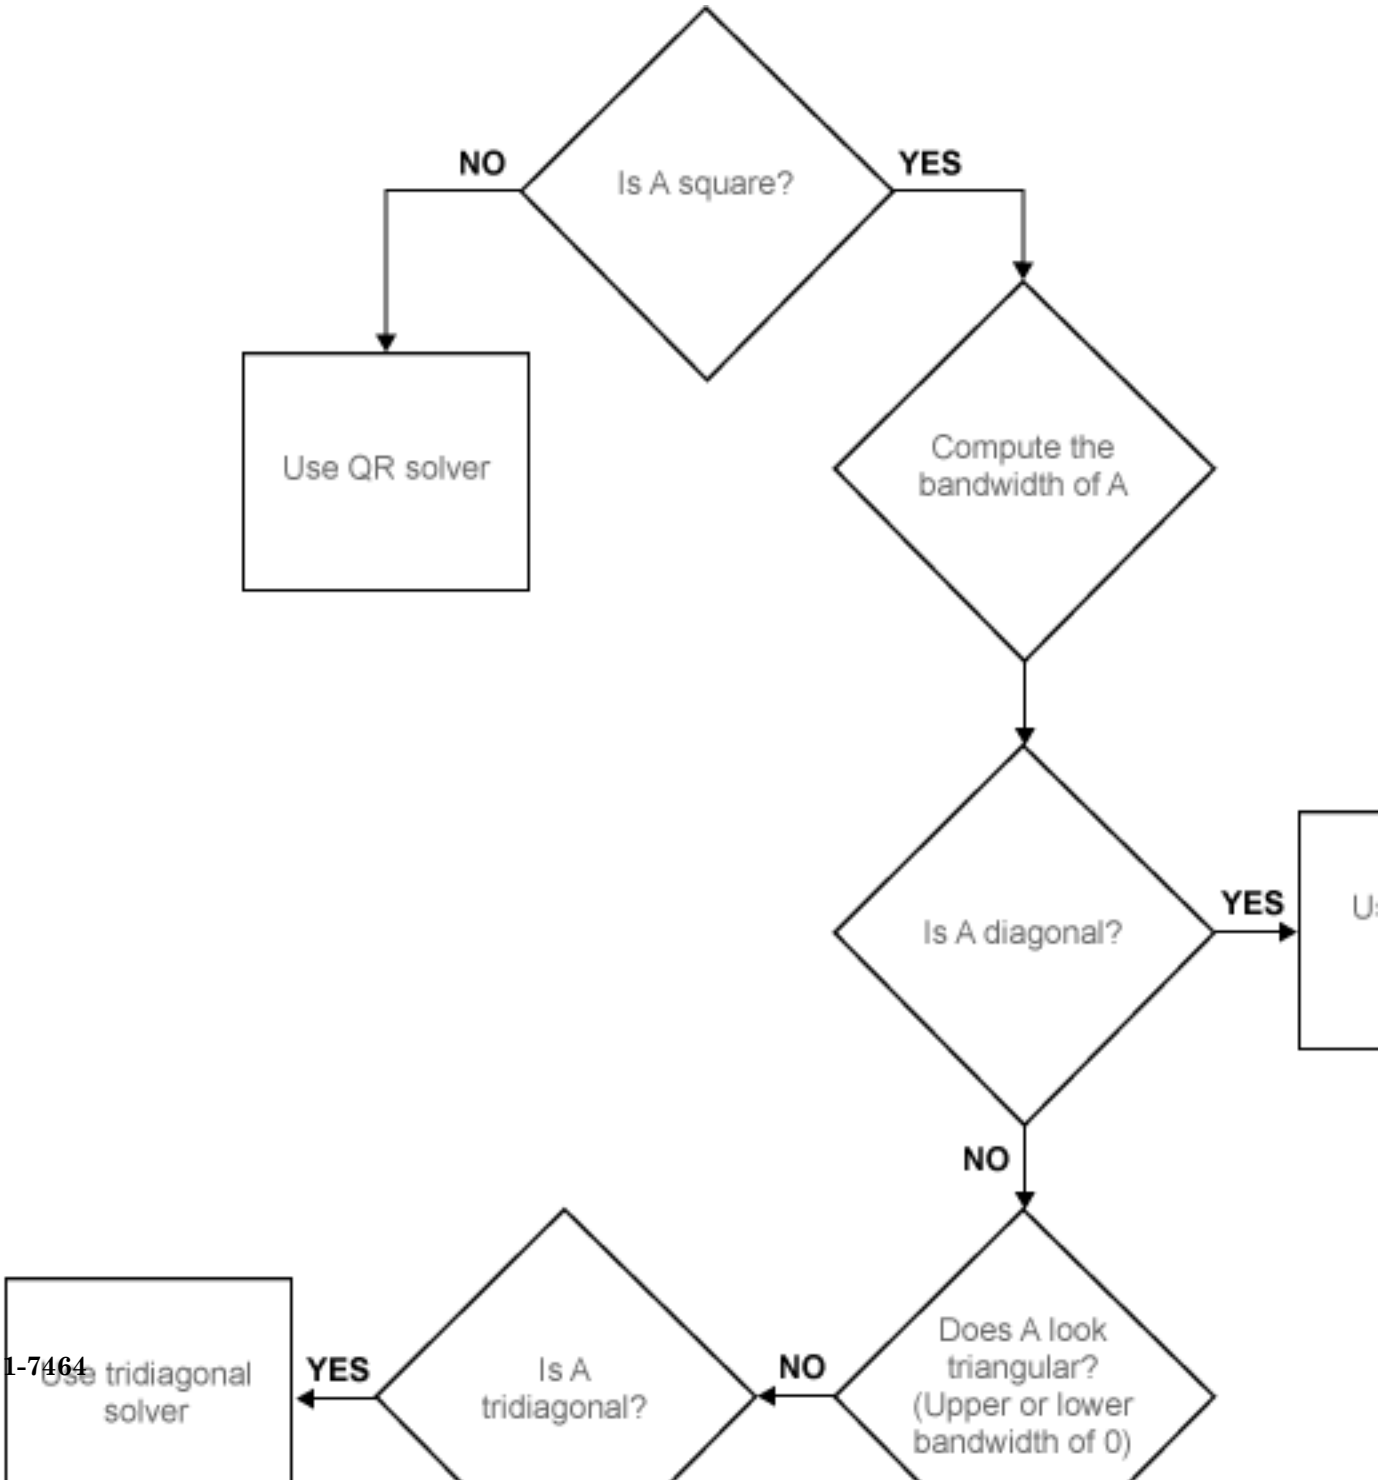
Is A square?
NO
YES
Use QR solver
Compute the bandwidth of A
Is A diagonal?
YES
NO
Does A look triangular? (Upper or lower bandwidth of 0)
NO
Is A tridiagonal?
YES
Use tridiagonal solver

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

For the syntax `Z = X\Y`, the array `X` must be a non-tall scalar.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`chol` | `inv` | `ldivide` | `ldl` | `linsolve` | `lu` | `mrdivide` | `pinv` | `qr` | `rdivide`

Topics

"Array vs. Matrix Operations"
"Operator Precedence"
"Systems of Linear Equations"
"Operator Overloading"
"MATLAB Operators and Special Characters"

Introduced before R2006a

mrdivide, /

Solve systems of linear equations $xA = B$ for x

Syntax

```
x = B/A
x = mrdivide(B,A)
```

Description

`x = B/A` solves the system of linear equations `x*A = B` for `x`. The matrices `A` and `B` must contain the same number of columns. MATLAB displays a warning message if `A` is badly scaled or nearly singular, but performs the calculation regardless.

- If `A` is a scalar, then `B/A` is equivalent to `B./A`.
- If `A` is a square `n`-by-`n` matrix and `B` is a matrix with `n` columns, then `x = B/A` is a solution to the equation `x*A = B`, if it exists.
- If `A` is a rectangular `m`-by-`n` matrix with `m ~= n`, and `B` is a matrix with `n` columns, then `x = B/A` returns a least-squares solution of the system of equations `x*A = B`.

`x = mrdivide(B,A)` is an alternative way to execute `x = B/A`, but is rarely used. It enables operator overloading for classes.

Examples

System of Equations

Solve a system of equations that has a unique solution, `x*A = B`.

```
A = [1 1 3; 2 0 4; -1 6 -1];
B = [2 19 8];
x = B/A
```

```
x =
```

```
    1.0000    2.0000    3.0000
```

Least-Squares on an Underdetermined System

Solve an underdetermined system, `x*C = D`.

```
C = [1 0; 2 0; 1 0];
D = [1 2];
x = D/C
```

```
Warning: Rank deficient, rank = 1, tol =  1.332268e-15.

x =

         0    0.5000         0
```

MATLAB® issues a warning but proceeds with calculation.

Verify that `x` is not an exact solution.

```
x*C-D
```

```
ans =

     0    -2
```

Input Arguments

A — Coefficient matrix

vector | full matrix | sparse matrix

Coefficient matrix, specified as a vector, full matrix, or sparse matrix. If `A` has `n` columns, then `B` must have `n` columns.

Data Types: `single` | `double`
Complex Number Support: Yes

B — Right-hand side

vector | full matrix | sparse matrix

Right-hand side, specified as a vector, full matrix, or sparse matrix. If `B` has `n` columns, then `A` must have `n` columns.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

`x` — Solution
vector | full matrix | sparse matrix

Solution, returned as a vector, full matrix, or sparse matrix. If `A` is an `m`-by-`n` matrix and `B` is a `p`-by-`n` matrix, then `x` is a `p`-by-`m` matrix.

`x` is sparse only if both `A` and `B` are sparse matrices.

Tips

- The operators `/` and `\` are related to each other by the equation `B/A = (A'\B')'`.
- If `A` is a square matrix, `B/A` is roughly equal to `B*inv(A)`, but MATLAB processes `B/A` differently and more robustly.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

For the syntax `Z = X/Y`, the array `Y` must be a non-tall scalar.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`inv` | `ldivide` | `mldivide` | `rdivide` | `transpose`

Topics

"Array vs. Matrix Operations"
"Operator Precedence"
"Systems of Linear Equations"
"MATLAB Operators and Special Characters"

Introduced before R2006a

mlint

Check MATLAB code files for possible problems

Note: `mlint` is not recommended. Use `checkcode` instead.

Alternatives

For information on using the graphical user interface to the Code Analyzer, see "Check Code for Errors and Warnings".

Syntax

```
mlint('filename')
mlint('filename','-config=settings.txt')
mlint('filename','-config=factory')
inform=mlint('filename','-struct')
msg=mlint('filename','-string')
[inform,filepaths]=mlint('filename')
inform=mlint('filename','-id')
inform=mlint('filename','-fullpath')
inform=mlint('filename','-notok')
mlint('filename','-cyc')
mlint('filename','-codegen')
mlint('filename','-eml')
```

Description

`mlint('filename')` displays Code Analyzer messages about `filename`, where the message reports potential problems and opportunities for code improvement. The line number in the message is a hyperlink that opens the file in the Editor, scrolled to that line. If `filename` is a cell array, information is displayed for each file. For `mlint(F1,F2,F3,...)`, where each input is a character array, MATLAB software

displays information about each input file name. You cannot combine cell arrays and character arrays of file names. Note that the exact text of the `mlint` messages is subject to some change between versions.

`mlint('filename','-config=settings.txt')` overrides the default active settings file with the settings that enable or suppress messages as indicated in the specified `settings.txt` file.

Note: If used, you must specify the full path to the `settings.txt` file specified with the `-config` option.

For information about creating a `settings.txt` file, see "Save and Reuse Code Analyzer Message Settings". If you specify an invalid file, `mlint` returns a message indicating that it cannot open or read the file you specified. In that case, `mlint` uses the factory default settings.

`mlint('filename','-config=factory')` ignores all settings files and uses the factory default preference settings.

`inform=mlint('filename','-struct')` returns the information in a structure array whose length is the number of messages found. The structure has the fields that follow.

Field	Description
`message`	Message describing the suspicious construct that code analysis caught.
`line`	Vector of file line numbers to which the message refers.
`column`	Two-column array of file columns (column extents) to which the message applies. The first column of the array specifies the column in the Editor where the message begins. The second column of the array specifies the column in the Editor where the message ends. There is one row in the two-column array for each occurrence of a message.

If you specify multiple file names as input, or if you specify a cell array as input, `inform` contains a cell array of structures.

`msg=mlint('filename','-string')` returns the information as the character vector `msg`. If you specify multiple file names as input, or if you specify a cell array as input,

`msg` contains information for each file, separated by 10 equal sign characters (=), a space, the file name, a space, and 10 equal sign characters.

If you omit the **`-struct`** or **`-string`** argument and you specify an output argument, the default behavior is **`-struct`**. If you omit the argument and there are no output arguments, the default behavior is to display the information to the command line.

`[inform,filepaths]=mlint('filename')` additionally returns `filepaths`, the absolute paths to the file names, in the same order as you specified them.

`inform=mlint('filename','-id')` requests the message ID, where ID is a character vector of the form `ABC...`. When returned to a structure, the output also has the `id` field, which is the ID associated with the message.

`inform=mlint('filename','-fullpath')` assumes that the input file names are absolute paths, so that `mlint` does not try to locate them.

`inform=mlint('filename','-notok')` runs `mlint` for all lines in `filename`, even those lines that end with the `mlint` suppression directive, `%#ok`.

`mlint('filename','-cyc')` displays the McCabe complexity (also referred to as cyclomatic complexity) of each function in the file. Higher McCabe complexity values indicate higher complexity, and there is some evidence to suggest that programs with higher complexity values are more likely to contain errors. Frequently, you can lower the complexity of a function by dividing it into smaller, simpler functions. In general, smaller complexity values indicate programs that are easier to understand and modify. Some people advocate splitting up programs that have a complexity rating over 10.

`mlint('filename','-codegen')` enables code generation messages for display in the Command Window.

`mlint('filename','-eml')` `'-eml'` is not recommended. Use `'-codegen'` instead.

Examples

The following examples use `lengthofline.m`, which is a sample file with MATLAB code that can be improved. You can find it in *`matlabroot`*`/help/techdoc/matlab_env/examples`. If you want to run the examples, save a copy of `lengthofline.m` to a location on your MATLAB path.

Running mlint on a File with No Options

To run `mlint` on the example file, `lengthofline.m`, run

```
mlint('lengthofline')
```

MATLAB displays the M-Lint messages for `lengthofline.m` in the Command Window:

```
L 22 (C 1-9): The value assigned here to variable 'nothandle' might never be used.
L 23 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 24 (C 5-11): 'notline' might be growing inside a loop. Consider preallocating for speed.
L 24 (C 44-49): Use STRCMPI(str1,str2) instead of using LOWER in a call to STRCMP.
L 28 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 34 (C 13-16): 'data' might be growing inside a loop. Consider preallocating for speed.
L 34 (C 24-31): Use dynamic fieldnames with structures instead of GETFIELD.
                Type 'doc struct' for more information.
L 38 (C 29): Use || instead of | as the OR operator in (scalar) conditional statements.
L 39 (C 47): Use || instead of | as the OR operator in (scalar) conditional statements.
L 40 (C 47): Use || instead of | as the OR operator in (scalar) conditional statements.
L 42 (C 13-16): 'data' might be growing inside a loop. Consider preallocating for speed.
L 43 (C 13-15): 'dim' might be growing inside a loop. Consider preallocating for speed.
L 45 (C 13-15): 'dim' might be growing inside a loop.Consider preallocating for speed.
L 48 (C 52): There may be a parenthesis imbalance around here.
L 48 (C 53): There may be a parenthesis imbalance around here.
L 48 (C 54): There may be a parenthesis imbalance around here.
L 48 (C 55): There may be a parenthesis imbalance around here.
L 49 (C 17): Terminate statement with semicolon to suppress output (in functions).
L 49 (C 23): Use of brackets [] is unnecessary. Use parentheses to group, if needed.
```

For details about these messages and how to improve the code, see “Changing Code Based on Code Analyzer Messages” in the MATLAB Desktop Tools and Development Environment documentation.

Running mlint with Options to Show IDs and Return Results to a Structure

To store the results to a structure and include message IDs, run

```
inform=mlint('lengthofline', '-id')
```

MATLAB returns

```
inform =

19x1 struct array with fields:
    message
    line
    column
    id
```

To see values for the first message, run

```
inform(1)
```

MATLAB displays

```
ans =

    message: 'The value assigned here to variable 'nothandle' might never be used.'
       line: 22
     column: [1 9]
         id: 'NASGU'
```

Here, the message is for the value that appears on line 22 that extends from column 1–9 in the file.NASGU is the ID for the message `'The value assigned here to variable 'nothandle' might never be used.'`.

Displaying McCabe Complexity with mlint

To display the McCabe complexity of a MATLAB code file, run `mlint` with the `-cyc` option, as shown in the following example (assuming you have saved `lengthofline.m` to a local folder).

```
mlint lengthofline.m -cyc
```

Results displayed in the Command Window show the McCabe complexity of the file, followed by the M-Lint messages, as shown here:

```
L 1 (C 23-34): The McCabe complexity of 'lengthofline' is 12.
L 22 (C 1-9): The value assigned here to variable 'nothandle' might never be used.
L 23 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 24 (C 5-11): 'notline' might be growing inside a loop. Consider preallocating for speed.
L 24 (C 44-49): Use STRCMPI(str1,str2) instead of using UPPER/LOWER in a call to STRCMP.
L 28 (C 12-15): NUMEL(x) is usually faster than PROD(SIZE(x)).
L 34 (C 13-16): 'data' might be growing inside a loop. Consider preallocating for speed.
L 34 (C 24-31): Use dynamic fieldnames with structures instead of GETFIELD. Type 'doc struct'
 for more information.
L 38 (C 29): Use || instead of | as the OR operator in (scalar) conditional statements.
L 39 (C 47): Use || instead of | as the OR operator in (scalar) conditional statements.
L 40 (C 47): Use || instead of | as the OR operator in (scalar) conditional statements.
L 42 (C 13-16): 'data' might be growing inside a loop. Consider preallocating for speed.
L 43 (C 13-15): 'dim' might be growing inside a loop. Consider preallocating for speed.
L 45 (C 13-15): 'dim' might be growing inside a loop. Consider preallocating for speed.
L 48 (C 52): There may be a parenthesis imbalance around here.
L 48 (C 53): There may be a parenthesis imbalance around here.
L 48 (C 54): There may be a parenthesis imbalance around here.
L 48 (C 55): There may be a parenthesis imbalance around here.
L 49 (C 17): Terminate statement with semicolon to suppress output (in functions).
L 49 (C 23): Use of brackets [] is unnecessary.  Use parentheses to group, if needed.
```

See Also

`mlintrpt`, `profile`

How To

- For information on the suppression directive, `%#ok`, and suppressing messages from within your program, see “Adjust Code Analyzer Message Indicators and Messages”.

Introduced before R2006a

mlintrpt

Run `checkcode` for file or folder

Syntax

```
mlintrpt
mlintrpt(f)
mlintrpt(f, inputType)
mlintrpt( ___ ,settingsfile)
```

Description

`mlintrpt` scans all MATLAB code files in the current folder for Code Analyzer messages and reports the results in a MATLAB web browser.

`mlintrpt(f)` scans the specified file `f`.

`mlintrpt(f, inputType)` scans the specified file or folder `f`, as specified by `inputType`. Use `'file'` to specify a file and `'dir'` to specify a folder.

`mlintrpt( ___ ,settingsfile)` overrides the default active settings file with the specified settings file. You can specify `settingsfile` with any of the input arguments in the previous syntaxes.

Examples

Create Report for File

Run `mlintrpt` on the example file `lengthofline.m`. MATLAB® displays a report of potential problems and improvements for `lengthogline`.

```
mlintrpt('lengthofline')
```

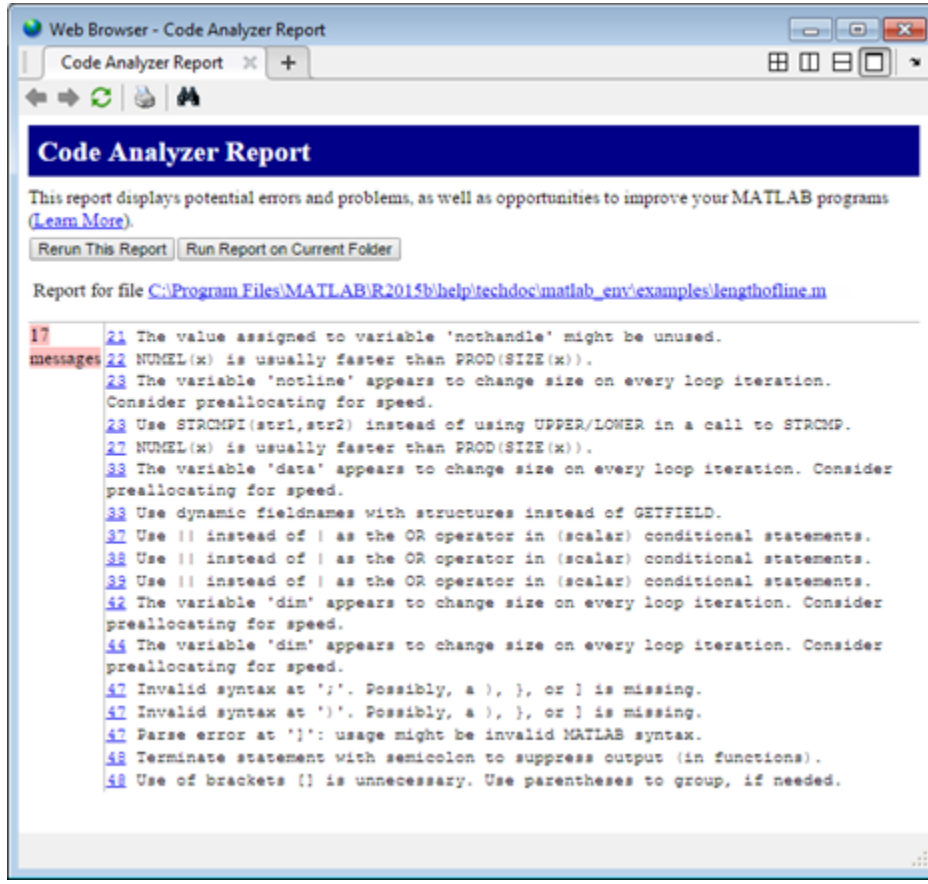

Create Report for All Files in Folder

Run `mlintrpt` on all examples in the MATLAB® example folder *`matlabroot`*`/matlab/help/techdoc/matlab_env/examples`. MATLAB displays a report of potential problems and improvements for all MATLAB code files in this folder.

```
mlintrpt(fullfile(matlabroot,'help','techdoc','matlab_env','examples'),'dir')
```

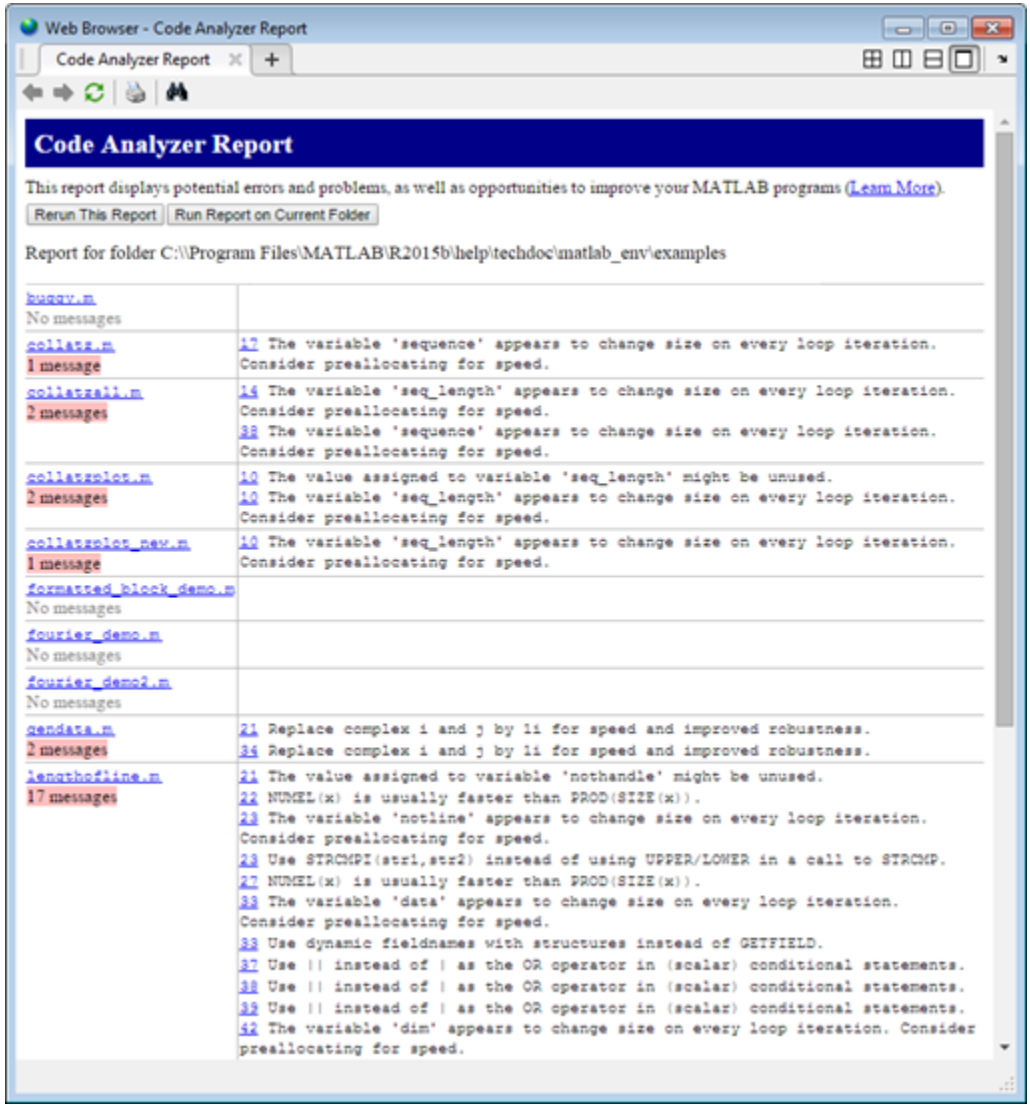
Web Browser - Code Analyzer Report
Code Analyzer Report
Code Analyzer Report
This report displays potential errors and problems, as well as opportunities to improve your MATLAB programs (Learn More).
Rerun This Report
Run Report on Current Folder
Report for folder C:\\Program Files\MATLAB\R2015b\help\techdoc\matlab_env\examples
buggy.m
No messages
collatz.m
1 message
17 The variable 'sequence' appears to change size on every loop iteration. Consider preallocating for speed.
collatzall.m
2 messages
14 The variable 'seq_length' appears to change size on every loop iteration. Consider preallocating for speed.
38 The variable 'sequence' appears to change size on every loop iteration. Consider preallocating for speed.
collatzplot.m
2 messages
10 The value assigned to variable 'seq_length' might be unused.
10 The variable 'seq_length' appears to change size on every loop iteration. Consider preallocating for speed.
collatzplot_new.m
1 message
10 The variable 'seq_length' appears to change size on every loop iteration. Consider preallocating for speed.
formatted_block_demo.m
No messages
fourier_demo.m
No messages
fourier_demo2.m
No messages
gendata.m
2 messages
21 Replace complex i and j by 1i for speed and improved robustness.
34 Replace complex i and j by 1i for speed and improved robustness.
lengthofline.m
17 messages
21 The value assigned to variable 'nothandle' might be unused.
22 NUMEL(x) is usually faster than PROD(SIZE(x)).
23 The variable 'notline' appears to change size on every loop iteration. Consider preallocating for speed.
23 Use STRCMPI(str1,str2) instead of using UPPER/LOWER in a call to STRCMP.
27 NUMEL(x) is usually faster than PROD(SIZE(x)).
33 The variable 'data' appears to change size on every loop iteration. Consider preallocating for speed.
33 Use dynamic fieldnames with structures instead of GETFIELD.
37 Use || instead of | as the OR operator in (scalar) conditional statements.
38 Use || instead of | as the OR operator in (scalar) conditional statements.
39 Use || instead of | as the OR operator in (scalar) conditional statements.
42 The variable 'dim' appears to change size on every loop iteration. Consider preallocating for speed.

Suppress Code Analyzer Messages in Report

Suppress specific messages in a report by creating and specifying a settings file. For example, the file `lengthofline.m` includes several lines that use `|` instead of `||` as the `OR` operator. By default, `mlintrpt` flags these lines.

```
mlintrpt('lengthofline')
```

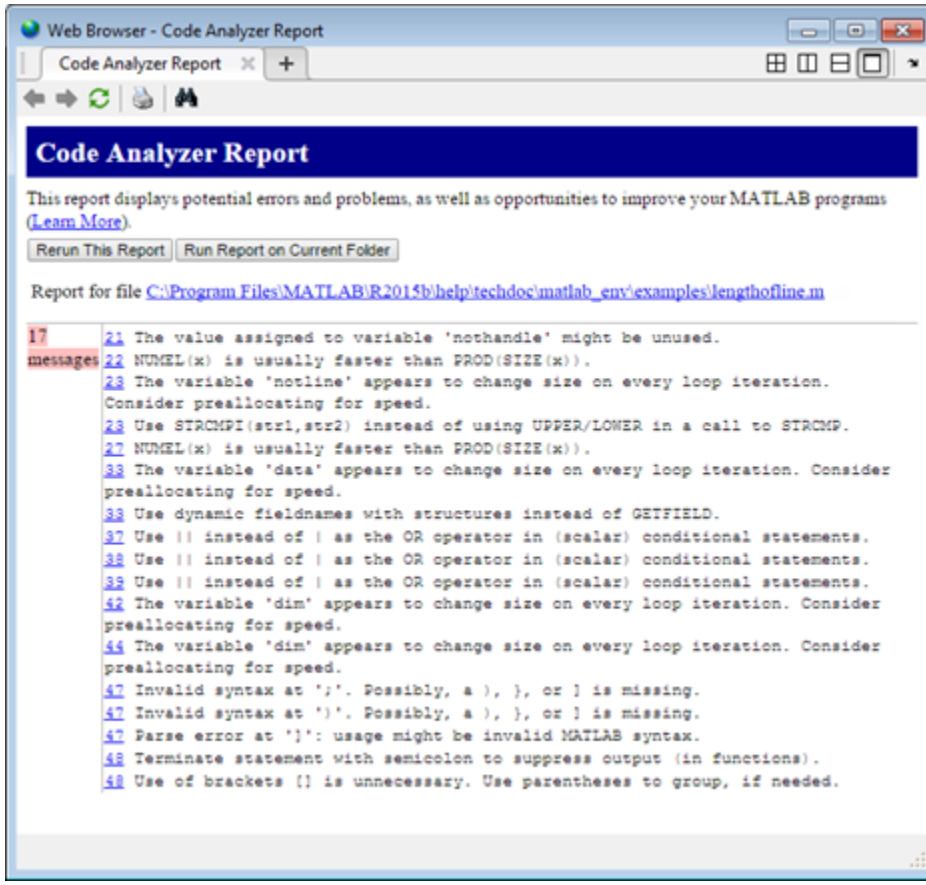

Create a settings file that suppresses the message flagging the use of `|` as the `OR` operator.

1 On the **Home** tab, in the **Environment** section, click the **Preferences** button.

2. Select **Code Analyzer** in the left pane.
3. Under **Default Settings**, in the **Aesthetics and Readability** section, clear the message **Use || instead of | as the OR operator in (scalar) conditional statements**.
4. Enter `mysettings.txt` as the file name and save it to your current folder.
5. Press the **Cancel** button to exit out of the preference panel without changing the active settings.

Run `mlintrpt` on the example file using the custom settings file `mysettings.txt`. The message **Use || instead of | as the OR operator in (scalar) conditional statements** is suppressed and is no longer visible in the report.

```
mlintrpt('lengthofline','mysettings.txt')
```

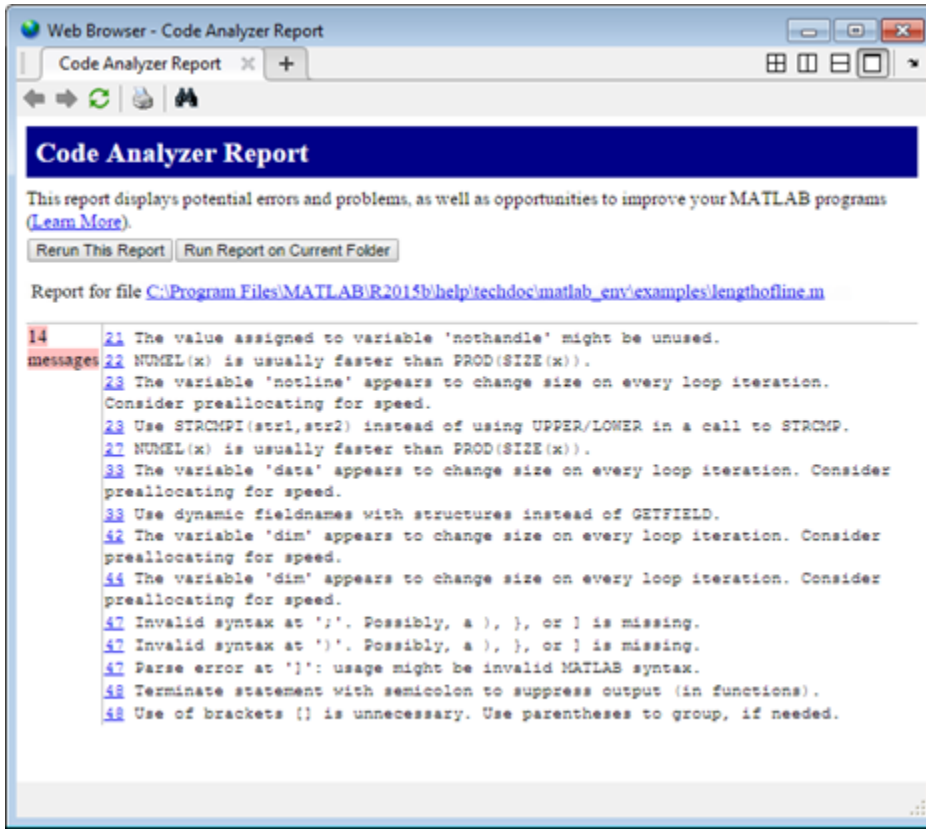

Input Arguments

`f` — File or folder name
character vector

File or folder name, specified as a character vector. The file name can include a partial path, but must be in a folder on the search path, or in the current folder.

`inputType` — Input type
`'file'` | `'dir'`

Input type, specified as `'file'` if the input is a file or `'dir'` if the input is a folder.

`settingsfile` — Settings file name
character vector

Settings file name, specified as a character vector. If the file is not in the current folder, provide the full path to the file.

For information about creating a settings file, see "Save and Reuse Code Analyzer Message Settings". If you specify an invalid file, the first message in the report is `0: Unable to open or read the configuration file 'mymlint.txt'--using default settings`.

See Also

See Also
`checkcode`

Topics
"Check Code for Errors and Warnings"

Introduced before R2006a

mlock

Prevent clearing function from memory

Syntax

```
mlock
```

Description

`mlock` locks the currently running function in memory so that subsequent `clear` functions do not remove it. Locking a function in memory also prevents any `persistent` variables defined in the file from getting reinitialized.

Use the `munlock` function to return the file to its normal, clearable state.

Examples

The function `testfun` begins with an `mlock` statement.

```
function testfun
mlock
  .
  .
```

When you execute this function, it becomes locked in memory. You can check this using the `mislocked` function.

```
testfun

mislocked('testfun')
ans =
     1
```

Using `munlock`, you unlock the `testfun` function in memory. Checking its status with `mislocked` shows that it is indeed unlocked at this point.

```
munlock('testfun')
```

```
mislocked('testfun')
ans =
     0
```

See Also

mislocked | inmem | munlock | persistent

Introduced before R2006a

mmfileinfo

Information about multimedia file

Syntax

```
info = mmfileinfo(filename)
```

Description

`info = mmfileinfo(filename)` returns a structure, `info`, with fields containing information about the contents of the multimedia file identified by `filename`. The `filename` is specified as a character vector.

If `filename` is a URL, `mmfileinfo` might take a long time to return because it must first download the file. For large files, downloading can take several minutes. To avoid blocking the MATLAB command line while this processing takes place, download the file before calling `mmfileinfo`.

The `info` structure contains the following fields, listed in the order they appear in the structure.

Field	Description
`Filename`	Character vector indicating the name of the file.
`Path`	Character vector indicating the absolute path to the file.
`Duration`	Length of the file in seconds.
`Audio`	Structure containing information about the audio data in the file. See “Audio Data” on page 1-7485 for more information about this data structure.
`Video`	Structure containing information about the video data in the file. See “Video Data” on page 1-7485 for more information about this data structure.

Audio Data

The `Audio` structure contains the following fields, listed in the order they appear in the structure. If the file does not contain audio data, the fields in the structure are empty.

Field	Description
`Format`	Text indicating the audio format.
`NumberOfChannels`	Number of audio channels.

Video Data

The `Video` structure contains the following fields, listed in the order they appear in the structure. If the file does not contain video data, the fields in the structure are empty.

Field	Description
`Format`	Text indicating the video format.
`Height`	Height of the video frame.
`Width`	Width of the video frame.

Examples

Display information about the example file `xylophone.mpg`:

```
info = mmfileinfo('xylophone.mpg')
audio = info.Audio
video = info.Video
```

MATLAB returns:

```
info = 
    Filename: 'xylophone.mpg'
        Path: 'matlabroot\toolbox\matlab\audiovideo'
    Duration: 4.7020
       Audio: [1x1 struct]
       Video: [1x1 struct]

audio = 
              Format: 'MPEG'
```

```
    NumberOfChannels: 2

video =
    Format: 'MPEG1'
    Height: 240
     Width: 320
```

where `Path` is system-dependent.

See Also

See Also

`VideoReader`

Introduced before R2006a

mod

Remainder after division (modulo operation)

Syntax

```
b = mod(a,m)
```

Description

`b = mod(a,m)` returns the remainder after division of `a` by `m`, where `a` is the dividend and `m` is the divisor. This function is often called the modulo operation, which can be expressed as `b = a - m.*floor(a./m)`. The `mod` function follows the convention that `mod(a,0)` returns `a`.

Examples

Remainder After Division of Scalar

Compute 23 modulo 5.

```
b = mod(23,5)
```

```
b = 3
```

Remainder After Division of Vector

Find the remainder after division for a vector of integers and the divisor `3`.

```
a = 1:5;
m = 3;
b = mod(a,m)
```

```
b =

     1     2     0     1     2
```

Remainder After Division for Positive and Negative Values

Find the remainder after division for a set of integers including both positive and negative values. Note that nonzero results are always positive if the divisor is positive.

```
a = [-4 -1 7 9];
m = 3;
b = mod(a,m)
```

```
b =

     2     2     1     0
```

Remainder After Division for Negative Divisor

Find the remainder after division by a negative divisor for a set of integers including both positive and negative values. Note that nonzero results are always negative if the divisor is negative.

```
a = [-4 -1 7 9];
m = -3;
b = mod(a,m)
```

```
b =

    -1    -1    -2     0
```

Remainder After Division for Floating-Point Values

Find the remainder after division for several angles using a modulus of `2*pi`. Note that `mod` attempts to compensate for floating-point round-off effects to produce exact integer results when possible.

```
theta = [0.0 3.5 5.9 6.2 9.0 4*pi];
m = 2*pi;
b = mod(theta,m)
```

```
b =
```

```
     0    3.5000    5.9000    6.2000    2.7168         0
```

Input Arguments

a — Dividend

scalar | vector | matrix | multidimensional array

Dividend, specified as a scalar, vector, matrix, or multidimensional array. `a` must be a real-valued array of any numerical type. Numeric inputs `a` and `m` must either be the same size or have sizes that are compatible (for example, `a` is an `M`-by-`N` matrix and `m` is a scalar or `1`-by-`N` row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If `a` and `m` are duration arrays, then they must be the same size unless one is a scalar. If one input is a duration array, the other input can be a duration array or a numeric array. In this context, `mod` treats numeric values as a number of standard 24-hour days.

If one input has an integer data type, then the other input must be of the same integer data type or be a scalar `double`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration` | `char`

m — Divisor

scalar | vector | matrix | multidimensional array

Divisor, specified as a scalar, vector, matrix, or multidimensional array. `m` must be a real-valued array of any numerical type. Numeric inputs `a` and `m` must either be the same size or have sizes that are compatible (for example, `a` is an `M`-by-`N` matrix and `m` is a scalar or `1`-by-`N` row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If `a` and `m` are duration arrays, then they must be the same size unless one is a scalar. If one input is a duration array, the other input can be a duration array or a numeric array. In this context, `mod` treats numeric values as a number of standard 24-hour days.

If one input has an integer data type, then the other input must be of the same integer data type or be a scalar `double`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration` | `char`

Definitions

Differences Between mod and rem

The concept of remainder after division is not uniquely defined, and the two functions `mod` and `rem` each compute a different variation. The `mod` function produces a result that is either zero or has the same sign as the divisor. The `rem` function produces a result that is either zero or has the same sign as the dividend.

Another difference is the convention when the divisor is zero. The `mod` function follows the convention that `mod(a,0)` returns `a`, whereas the `rem` function follows the convention that `rem(a,0)` returns `NaN`.

Both variants have their uses. For example, in signal processing, the `mod` function is useful in the context of periodic signals because its output is periodic (with period equal to the divisor).

Congruence Relationships

The `mod` function is useful for congruence relationships: `a` and `b` are congruent (mod m) if and only if `mod(a,m) == mod(b,m)`. For example, 23 and 13 are congruent (mod 5).

References

[1] Knuth, Donald E. *The Art of Computer Programming*. Vol. 1. Addison Wesley, 1997 pp.39–40.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Arithmetic is performed using the output class. Results might not match MATLAB due to differences in rounding errors.
- If one of the inputs has type `int64` or `uint64`, both inputs must have the same type.

See Also

See Also

`rem`

Introduced before R2006a

mode

Most frequent values in array

Syntax

```
M = mode(A)
M = mode(A,dim)

[M,F] = mode( ___ )
[M,F,C] = mode( ___ )
```

Description

`M = mode(A)` returns the sample mode of `A`, which is the most frequently occurring value in `A`. When there are multiple values occurring equally frequently, `mode` returns the smallest of those values. For complex inputs, the smallest value is the first value in a sorted list.

- If `A` is a vector, then `mode(A)` returns the most frequent value of `A`.
- If `A` is a nonempty matrix, then `mode(A)` returns a row vector containing the mode of each column of `A`.
- If `A` is an empty 0-by-0 matrix, `mode(A)` returns `NaN`.
- If `A` is a multidimensional array, then `mode(A)` treats the values along the first array dimension whose size does not equal `1` as vectors and returns an array of most frequent values. The size of this dimension becomes `1` while the sizes of all other dimensions remain the same.

`M = mode(A,dim)` returns the mode of elements along dimension `dim`. For example, if `A` is a matrix, then `mode(A,2)` is a column vector containing the most frequent value of each row

`[M,F] = mode( ___ )` also returns a frequency array `F`, using any of the input arguments in the previous syntaxes. `F` is the same size as `M`, and each element of `F` represents the number of occurrences of the corresponding element of `M`.

`[M,F,C] = mode(___)` also returns a cell array `C` of the same size as `M` and `F`. Each element of `C` is a sorted vector of all values that have the same frequency as the corresponding element of `M`.

Examples

Mode of Matrix Columns

Define a 3-by-4 matrix.

```
A = [3 3 1 4; 0 0 1 1; 0 1 2 4]
```

```
A =

     3     3     1     4
     0     0     1     1
     0     1     2     4
```

Find the most frequent value of each column.

```
M = mode(A)
```

```
M =

     0     0     1     4
```

Mode of Matrix Rows

Define a 3-by-4 matrix.

```
A = [3 3 1 4; 0 0 1 1; 0 1 2 4]
```

```
A =

     3     3     1     4
     0     0     1     1
     0     1     2     4
```

Find the most frequent value of each row.

```
M = mode(A,2)
```

```
M =

     3
     0
     0
```

Mode of 3-D Array

Create a 1-by-3-by-4 array of integers between 1 and 10.

```
A = gallery('integerdata',10,[1,3,4],1)
```

```
A =

(:,:,1) =

    10     8    10


(:,:,2) =

     6     9     5


(:,:,3) =

     9     6     1


(:,:,4) =

     4     9     5
```

Find the most frequent values of this 3-D array along the second dimension.

```
M = mode(A)
```

```
M =

(:,:,1) =
```

```
    10

(:,:,2) =

     5

(:,:,3) =

     1

(:,:,4) =

     4
```

This operation produces a 1-by-1-by-4 array by finding the most frequent value along the second dimension. The size of the second dimension reduces to 1.

Compute the mode along the first dimension of A.

```
M = mode(A,1);
isequal(A,M)
```

```
ans = logical
   1
```

This returns the same array as A because the size of the first dimension is 1.

Mode of Matrix Columns with Frequency Information

Define a 3-by-4 matrix.

```
A = [3 3 1 4; 0 0 1 1; 0 1 2 4]
```

```
A =

     3     3     1     4
     0     0     1     1
```

```
     0     1     2     4
```

Find the most frequent value of each column, as well as how often it occurs.

```
[M,F] = mode(A)
```

```
M =

     0     0     1     4


F =

     2     1     2     2
```

`F(1)` is `2` since `M(1)` occurs twice in the first column.

Mode of Matrix Rows with Frequency and Multiplicity Information

Define a 3-by-4 matrix.

```
A = [3 3 1 4; 0 0 1 1; 0 1 2 4]
```

```
A =

     3     3     1     4
     0     0     1     1
     0     1     2     4
```

Find the most frequent value of each row, how often it occurs, and which values in that row occur with the same frequency.

```
[M,F,C] = mode(A,2)
```

```
M =

     3
     0
     0
```

```
F =

     2
     2
     1


C = 3×1 cell array
    [         3]
    [2×1 double]
    [4×1 double]
```

`C{2}` is the 2-by-1 vector `[0;1]` since values `0` and `1` in the second row occur with frequency `F(2)`.

`C{3}` is the 4-by-1 vector `[0;1;2;4]` since all values in the third row occur with frequency `F(3)`.

Mode of 16-bit Unsigned Integer Array

Define a 1-by-4 vector of 16-bit unsigned integers.

```
A = gallery('integerdata',10,[1,4],3,'uint16')
```

```
A = 1×4 uint16 row vector

   6   3   2   3
```

Find the most frequent value, as well as the number of times it occurs.

```
[M,F] = mode(A),
```

```
M = uint16
    3

F = 2
```

```
class(M)
```

```
ans =
'uint16'
```

M is the same class as the input, A.

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array. A can be a numeric array, categorical array, datetime array, or duration array.

NaN or NaT (Not a Time) values in the input array, A, are ignored. Undefined values in categorical arrays are similar to NaNs in numeric arrays.

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension dim indicates the dimension whose length reduces to 1. The size(M,dim) is 1, while the sizes of all other dimensions remain the same.

Consider a two-dimensional input array, A.

- If dim = 1, then mode(A,1) returns a row vector containing the most frequent value in each column.

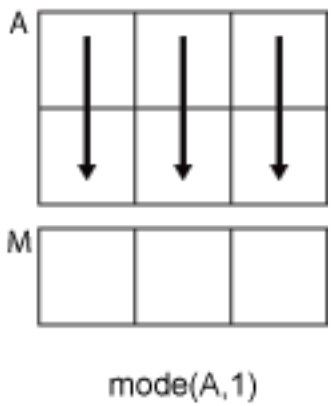

- If `dim = 2`, then `mode(A,2)` returns a column vector containing the most frequent value in each row.

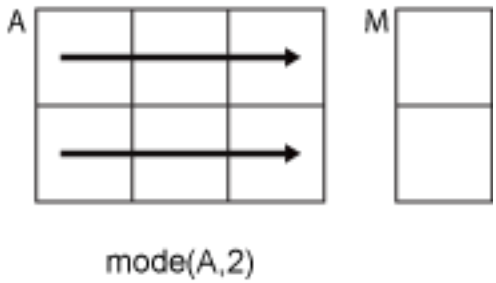

`mode` returns `A` if `dim` is greater than `ndims(A)`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`M` — Most frequent values

scalar | vector | matrix | multidimensional array

Most frequent values returned as a scalar, vector, matrix, or multidimensional array. When there are multiple values occurring equally frequently, `mode` returns the smallest of those values. For complex inputs, this is taken to be the first value in a sorted list of values.

The class of `M` is the same as the class of the input array, `A`.

`F` — Frequency array

scalar | vector | matrix | multidimensional array

Frequency array returned as a scalar, vector, matrix, or multidimensional array. The size of `F` is the same as the size of `M`, and each element of `F` represents the number of occurrences of the corresponding element of `M`.

The class of `F` is always `double`.

`C` — Most frequent values with multiplicity

cell array

Most frequent values with multiplicity returned as a cell array. The size of `C` is the same as the size of `M` and `F`, and each element of `C` is a sorted column vector of all values that have the same frequency as the corresponding element of `M`.

Tips

- The `mode` function is most useful with discrete or coarsely rounded data. The mode for a continuous probability distribution is defined as the peak of its density function. Applying the `mode` function to a sample from that distribution is unlikely to provide a good estimate of the peak; it would be better to compute a histogram or density estimate and calculate the peak of that estimate. Also, the `mode` function is not suitable for finding peaks in distributions having multiple modes.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support the third output argument `C`.
- If supplied, `dim` must be a constant.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`histcounts` | `histogram` | `mean` | `median` | `sort`

Introduced before R2006a

month

Month number and name

Syntax

```
m = month(t)
m = month(t,monthType)
```

Description

`m = month(t)` returns the month numbers of the datetime values in `t`. The `m` output contains integer values from 1 to 12.

`m = month(t,monthType)` returns the type of month number or name specified by `monthType`.

The `month` function returns the month numbers or names of datetime values. To assign month numbers to datetime array `t`, use `t.Month` and modify the Month property.

Examples

Extract Month Number from Dates

Extract the month numbers from an array of dates.

```
t = datetime(2014,05,31):caldays(35):datetime(2014,10,15)
```

```
t = 1×4 datetime array
   31-May-2014   05-Jul-2014   09-Aug-2014   13-Sep-2014
```

```
m = month(t)
```

```
m =

     5     7     8     9
```

Find Month Names of Dates

Get the month names from an array of dates.

```
t = datetime(2013,01,01):calweeks(12):datetime(2013,12,31)
```

```
t = 1×5 datetime array
   01-Jan-2013   26-Mar-2013   18-Jun-2013   10-Sep-2013   03-Dec-2013
```

```
m = month(t,'name')
```

```
m = 1×5 cell array
    'January'    'March'    'June'    'September'    'December'
```

Input Arguments

`t` — Input date and time
`datetime` array

Input date and time, specified as a `datetime` array.

`monthType` — Type of month values
`'monthofyear'` (default) | `'name'` | `'shortname'`

Type of month values, specified as a value in the table.

Value of `monthType`	Description
`'monthofyear'`	Month-of-year number
`'name'`	Full month names, for example, `August` or `September`. For `NaT` datetime values, the month name is the empty character vector, `''`.
`'shortname'`	Abbreviated month names, for example, `Aug` or `Sep`. For `NaT` datetime values, the month name is the empty character vector, `''`.

Note: `month` returns month names in the language specified by the **Locale** option in the **Datetime format** section of the Preferences panel. To change the default datetime locale, see "Set Command Window Preferences".

Output Arguments

`m` — Month number or name

`double` array | cell array of character vectors

Month number or name, returned as a numeric array of type `double`, or a cell array of character vectors. `m` is the same size as `t`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

See Also

See Also

datetime Properties | `day` | `quarter` | `week` | `year` | `ymd`

Introduced in R2014b

more

Control paged output for Command Window

Syntax

```
more on
more off
more(n)
A = more(state)
```

Description

`more on` enables paging of the output in the MATLAB Command Window. MATLAB displays output one page at a time. Use the keys defined in the table below to control paging.

`more off` disables paging of the output in the MATLAB Command Window.

`more(n)` defines the length of a page to be `n` lines.

`A = more(state)` returns in `A` the number of lines that are currently defined to be a page. `state` can either be `'on'` or `'off'`, or the number of lines to set as the new page length.

By default, the length of a page is equal to the number of lines available for display in the MATLAB Command Window. Manually changing the size of the command window adjusts the page length accordingly.

If you set the page length to a specific value, MATLAB uses that value for the page size, regardless of the size of the command window. To have MATLAB return to matching page size to window size, type `more off` followed by `more on`.

To see the status of `more`, type `get(0,'More')`. MATLAB returns either `on` or `off`, indicating the `more` status.

When you have enabled `more` and are examining output, you can do the following.

Press the...	To...
Return key	Advance to the next line of output.
Space bar	Advance to the next page of output.
Q (for quit) key	Terminate display of the text. Do not use **Ctrl+C** to terminate `more` or you might generate error messages in the Command Window.

`more` is in the **`off`** state, by default.

See Also

`diary`

Introduced before R2006a

morebins

Increase number of histogram bins

Syntax

```
N = morebins(h)
N = morebins(h,direction)
```

Description

`N = morebins(h)` increases the number of bins in histogram `h` by 10% (rounded up to the nearest integer) and returns the new number of bins.

For bivariate histograms, this increases the bin count in both the *x* and *y* directions.

`N = morebins(h,direction)`, where `h` must be a `histogram2` object, only increases the number of bins in the dimension specified by `direction`. The `direction` option can be `'x'`, `'y'`, or `'both'`. The default value is `'both'`.

Examples

Increase Number of Histogram Bins

Plot a histogram of 1,000 random numbers and return a handle to the histogram object.

```
x = randn(1000,1);
h = histogram(x)
```

```
h =
  Histogram with properties:

             Data: [1000×1 double]
           Values: [3 1 2 15 17 27 53 79 85 101 127 110 124 95 67 32 27 16 6 6 4 1 2]
          NumBins: 23
         BinEdges: [-3.3000 -3.0000 -2.7000 -2.4000 -2.1000 -1.8000 -1.5000 -1.2000 -0
         BinWidth: 0.3000
```

```
        BinLimits: [-3.3000 3.6000]
    Normalization: 'count'
        FaceColor: 'auto'
        EdgeColor: [0 0 0]

  Show all properties
```

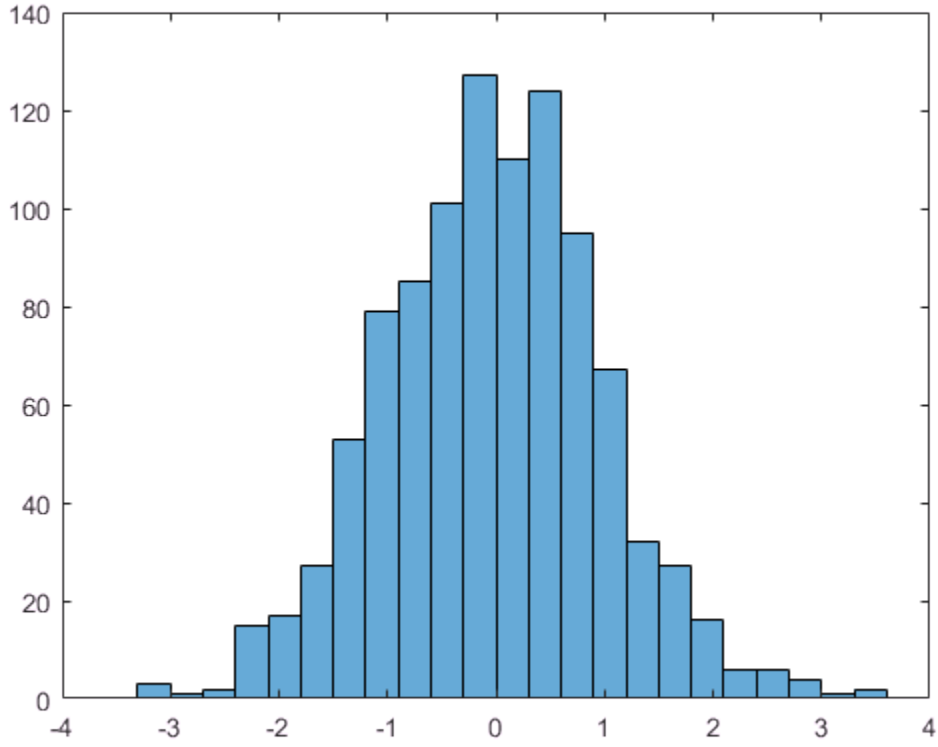

Use `morebins` to increase the number of bins in the histogram.

```
morebins(h);
morebins(h)
```

```
ans = 29
```

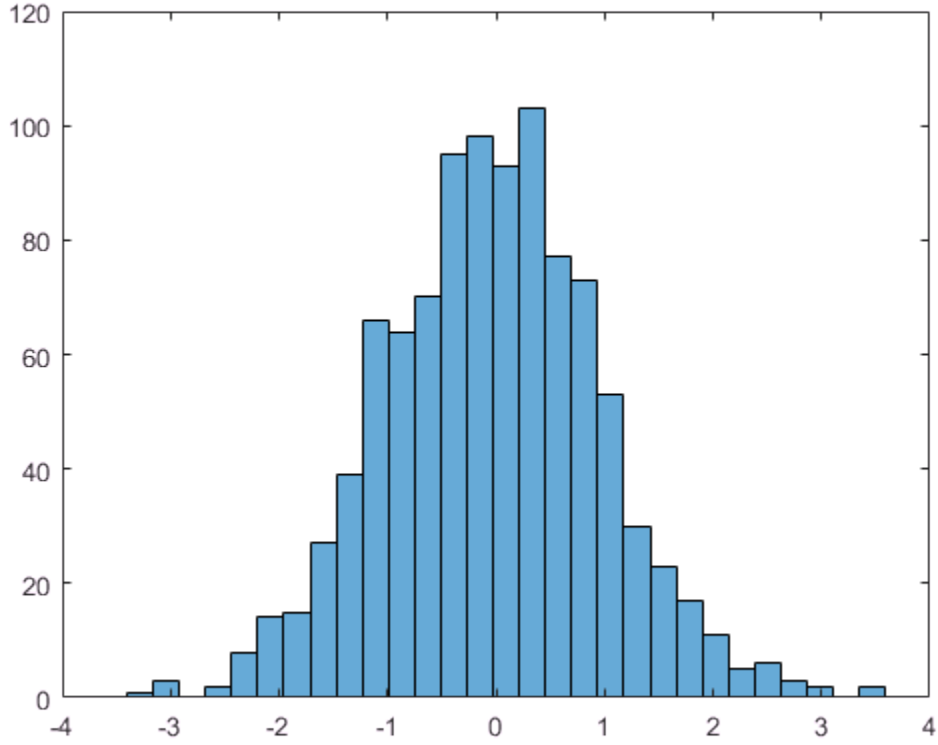

Input Arguments

h — Input histogram

`histogram` object | `histogram2` object

Input histogram, specified as a `histogram` or `histogram2` object. For more information, see histogram or histogram2.

`h` cannot be a categorical histogram.

`direction` — Direction to increase number of bins

`'both'` (default) | `'x'` | `'y'`

Direction to increase the number of bins, specified as `'x'`, `'y'`, or `'both'`. Specify `'x'` or `'y'` to only increase the number of bins in that direction while leaving the number of bins in the other direction constant.

Output Arguments

`N` — Number of bins

scalar | vector

Number of bins, returned as a scalar or vector. `N` is the new number of bins for the histogram after increase. For bivariate histogram plots, `N` is a two-element vector, `[nx ny]`.

See Also

See Also

`fewerbins` | `histcounts` | `histcounts2` | `histogram` | `histogram2`

Topics

histogram
histogram2

Introduced in R2014b

move

Move or resize control in parent window

Syntax

```
V = move(h,position)
```

Description

`V = move(h,position)` moves the control to the position specified by the `position` argument. When you use `move` with only the handle argument, `h`, it returns a four-element vector indicating the current position of the control.

The position argument is a four-element vector specifying the position and size of the control in the parent figure window. The elements of the vector are:

```
[x, y, width, height]
```

where `x` and `y` are offsets, in pixels, from the bottom left corner of the figure window to the same corner of the control, and `width` and `height` are the size of the control itself.

Examples

This example moves the control.

```
f = figure('Position',[100 100 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.1',[0 0 200 200],f);
pos = move(h,[50 50 200 200])
```

```
pos =
    50    50   200   200
```

The next example resizes the control to always be centered in the figure as you resize the figure window. Start by creating the script `resizectrl.m` that contains:

```
% Get the new position and size of the figure window
  fpos = get(gcbo,'position');
```

```
% Resize the control accordingly
  move(h,[0 0 fpos(3) fpos(4)]);
```

Now execute the following:

```
f = figure('Position',[100 100 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.1',[0 0 200 200]);
set(f,'ResizeFcn','resizectrl');
```

As you resize the figure window, notice that the circle moves so that it is always positioned in the center of the window.

See Also

`set (COM)` | `get (COM)`

Introduced before R2006a

movefile

Move file or folder

Syntax

```
movefile source
movefile source destination
movefile source destination f

status = movefile( ___ )
[status,msg] = movefile( ___ )
[status,msg,msgID] = movefile( ___ )
```

Description

`movefile source` moves the file or folder `source` to the current folder. `movefile` does not preserve the archive attribute of `source`.

`movefile source destination` moves the file or folder `source` to the file or folder `destination`. If `source` and `destination` are in the same location, `movefile` renames `source` to `destination`. To rename a file or folder when moving it, make `destination` a different name than `source`, and specify only one file or folder for `source`.

If `source` is a folder, `destination` must also be a folder. If `source` is a folder or specifies multiple files and `destination` does not exist, `movefile` creates `destination`.

`movefile source destination f` moves `source` to `destination`, even when `destination` is not writable. The state of the read/write attribute for `destination` does not change.

`status = movefile( ___ )` moves the specified file or folder and returns a status of `1` if the operation is successful. Otherwise, it returns `0`. You can use this syntax with any of the input argument combinations in the previous syntaxes.

`[status,msg] = movefile( ___ )` also returns the message text for any warning or error that occurs. You can use this syntax with any of the input argument combinations in the previous syntaxes.

`[status,msg,msgID] = movefile( ___ )` also returns the message ID for any warning or error that occurs. You can use this syntax with any of the previously defined input arguments.

Examples

Move Files to the Current Folder

Move files and folders to the current folder by omitting the destination input.

Create two folders: the first, `myfiles`, containing the file `myfile1.m`, and the second, `myotherfiles`, containing the file `myfile2.m`.

```
mkdir myfiles
movefile myfile1.m myfiles
mkdir myotherfiles
movefile myfile2.m myotherfiles
```

Move `myfile1.m` to the current folder. Since a destination is not specified, MATLAB® assumes the destination is the current folder.

```
movefile myfiles/myfile1.m
```

Set the current folder to `myfiles`. Move `myotherfiles` and its contents to the current folder.

```
cd myfiles
movefile ../myotherfiles
```

Move Files and Folders to a New Folder

Move files and subfolders whose names begin with `my` from the current folder to the folder `newFolder`, where `newFolder` does not exist.

```
movefile my* newFolder
```

Rename a Folder

Create and then rename the folder `myoldfolder` to `mynewfolder`.

```
mkdir myoldfolder
movefile myoldfolder mynewfolder
```

Move File to Read-Only Folder

Move the file `myfile1.m` from the current folder to the read-only folder `restricted.`

Create the read-only folder `restricted`.

```
mkdir restricted
fileattrib restricted -w
```

Move the file `myfile1.m`. A status of 0 shows the copy was unsuccessful.

```
status = movefile('myfile1.m','restricted');
status
```

```
status =

  logical

   0
```

Move the file `myfile1.m` using the 'f' option to override. A status of 1 and an empty `message` and `messageID` confirms the copy was successful.

```
[status,message,messageId] = movefile('myfile1.m','restricted','f');
status
message
messageId
```

```
status =

  logical

   1


message =

  0×0 empty char array
```

```
messageId =

  0×0 empty char array
```

Input Arguments

`source` — File or folder name to copy

character vector

File or folder name to copy, specified as a character vector. `source` can be an absolute or relative path. To copy multiple files or folders, use wildcards (*).

`destination` — File or folder name to copy to

character vector

File or folder name to copy to, specified as a character vector. `destination` can be an absolute or relative path, but cannot include wildcards (*).

Output Arguments

`status` — Indication of whether the attempt to copy the file or folder is successful

`0` | `1`

Indication of whether the attempt to copy the file or folder is successful, specified as `0` or `1`. If the attempt is successful, `status` is 1. Otherwise, `status` is 0.

Data Types: `logical`

`msg` — Error message

character vector

Error message, specified as a character vector. If an error or warning occurs, `msg` contains the message text of the error or warning. Otherwise, `msg` is empty, `''`.

`msgID` — Error message identifier

character vector

Error message identifier, specified as a character vector. If an error or warning occurs, `msgID` contains the message identifier of the error or warning. Otherwise, `msgID` is empty, `''`.

See Also

See Also

`cd` | `copyfile` | `delete` | `dir` | `mkdir` | `rmdir`

Topics

"Manage Files and Folders"
"Specify File Names"

Introduced before R2006a

movegui

Move UI figure to specified location on screen

Syntax

```
movegui(h,position)
movegui(position)
movegui(h)
movegui
```

Description

`movegui(h,position)` moves the figure `h` to the specified screen location and preserves the figure's size. The `position` argument is either a character vector or a two-element numeric vector, as defined in the tables that follow.

`movegui(position)` moves the callback figure (`gcbf`) or the current figure (`gcf`) to the specified position.

`movegui(h)` moves the figure to the `onscreen` position.

`movegui` moves the callback figure (`gcbf`) or the current figure (`gcf`) to the `onscreen` position. You can specify `'movegui'` as a `CreateFcn` callback for a figure. Doing so ensures that after you save a figure, that figure appears on screen when you reload it, regardless of its saved position. See the following example.

When it is a character vector, `position` is one of the following descriptors.

Position Character Vector	Description
`'north'`	Top center edge of screen
`'south'`	Bottom center edge of screen
`'east'`	Right center edge of screen
`'west'`	Left center edge of screen
`'northeast'`	Top right corner of screen

Position Character Vector	Description
`'northwest'`	Top left corner of screen
`'southeast'`	Bottom right corner of screen
`'southwest'`	Bottom left corner
`'center'`	Centered on screen
`'onscreen'`	Nearest location to current location that is entirely on screen

You can also specify the `position` argument as a two-element numeric vector, `[h,v]`. Depending on sign, `h` specifies the figure's offset from the left or right edge of the screen, and `v` specifies the figure's offset from the top or bottom of the screen, in pixels. The following table summarizes the possible values.

`h` (for `h >= 0`)	Offset of left side from left edge of screen
`h` (for `h < 0`)	Offset of right side from right edge of screen
`v` (for `v >= 0`)	Offset of bottom edge from bottom of screen
`v` (for `v < 0`)	Offset of top edge from top of screen

Applying `movegui` to a maximized figure window moves the window towards the task bar and creates a gap on the opposite side of the screen about as wide as the task bar. The window might shrink in size by a few pixels. If you use the `onscreen` option with a maximized figure window, then `movegui` creates a gap on both the left and upper sides of the screen so that the top-left corner of the figure is visible.

`GUIDE` and `openfig` call `movegui` when loading figures to ensure they are visible.

Examples

Ensure that a saved UI window appears on screen when you reload it, regardless of the target computer screen size and resolution. Create a figure that is off the screen, assign `movegui` as its `CreateFcn` callback, save the figure, and then reload it.

```
f = figure('Position',[10000,10000,400,300]);
% The figure does not display because
% it is created offscreen.
```

```
f.CreateFcn = @movegui;
hgsave(f,'onscreenfig');
close(f);
f2 = hgload('onscreenfig');
% The reloaded figure is now visible
```

Move a figure to the bottom left corner of the screen.

```
f = figure;
movegui(f,'southwest');
```

Move a figure so that it is offset 100 pixels from the bottom and left side of the screen.

```
f = figure;
movegui(f,[100,100]);
```

Definitions

Pixels

Distances in pixels are independent of your system resolution on Windows and Macintosh systems:

- On Windows systems, a pixel is 1/96th of an inch.
- On Macintosh systems, a pixel is 1/72nd of an inch.

On Linux systems, the size of a pixel is determined by your system resolution.

See Also

`guide` | `openfig`

Introduced before R2006a

movie

Play recorded movie frames

Syntax

```
movie(M)
movie(M,n)
movie(M,n,fps)
movie(h,...)
movie(h,M,n,fps,loc)
```

Description

The `movie` function plays the movie defined by a matrix whose columns are movie frames (usually produced by `getframe`).

`movie(M)` plays the movie in matrix `M` once, using the current axes as the default target. If you want to play the movie in the figure instead of the axes, specify the figure handle (or `gcf`) as the first argument: `movie(figure_handle,...)`. `M` must be an array of movie frames (usually from `getframe`).

`movie(M,n)` plays the movie `n` times. If `n` is negative, each cycle is shown forward then backward. If `n` is a vector, the first element is the number of times to play the movie, and the remaining elements make up a list of frames to play in the movie.

For example, if `M` has four frames then `n = [10 4 4 2 1]` plays the movie ten times, and the movie consists of frame `4` followed by frame `4` again, followed by frame `2` and finally frame `1`.

`movie(M,n,fps)` plays the movie at `fps` frames per second. The default is 12 frames per second. Computers that cannot achieve the specified speed play as fast as possible.

`movie(h,...)` plays the movie centered in the figure or axes identified by the handle `h`. Specifying the figure or axes enables MATLAB to fit the movie to the available size.

`movie(h,M,n,fps,loc)` specifies `loc`, a four-element location vector, `[x y 0 0]`, where the lower left corner of the movie frame is anchored (only the first two elements in

the vector are used). The location is relative to the lower left corner of the figure or axes specified by `handle` `h` and in units of pixels, regardless of the object's `Units` property.

Examples

Record Frames and Play Movie

Use the `getframe` function in a loop to record frames of the `peaks` function vibrating. Preallocate an array to store the movie frames.

```
figure
Z = peaks;
surf(Z)
axis tight manual
ax = gca;
ax.NextPlot = 'replaceChildren';


loops = 40;
F(loops) = struct('cdata',[],'colormap',[]);
for j = 1:loops
    X = sin(j*pi/10)*Z;
    surf(X,Z)
    drawnow
    F(j) = getframe;
end
```

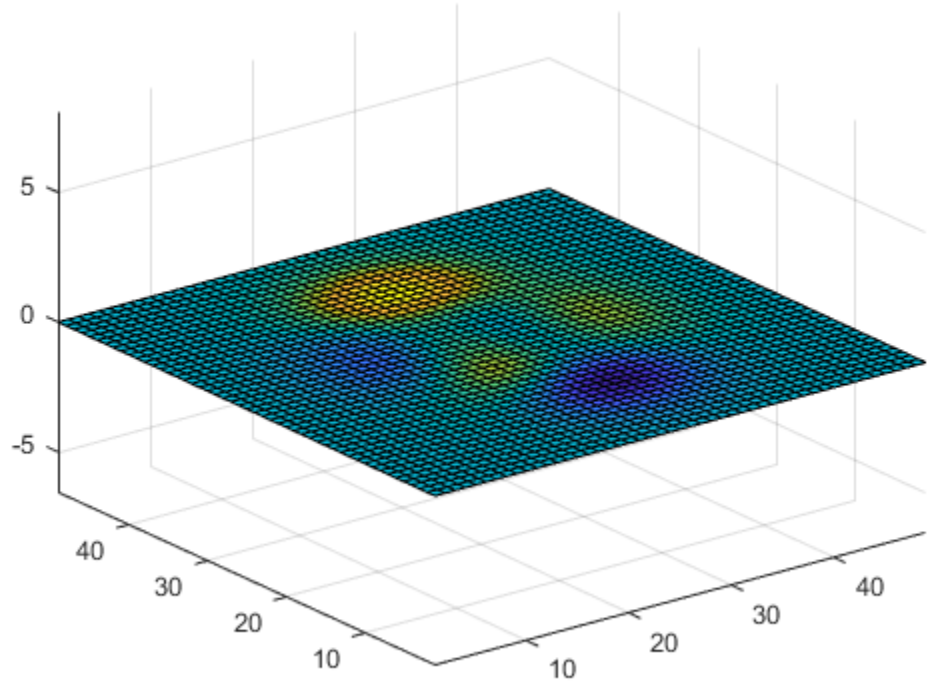

To play the movie two times, use `movie(F,2)`.

- "Record Animation for Playback"

Tips

The `movie` function uses a default figure size of 560-by-420 and does not resize figures to fit movies with larger or smaller frames. To accommodate other frame sizes, you can resize the figure to fit the movie.

`movie` only accepts 8-bit image frames; it does not accept 16-bit grayscale or 24–bit truecolor image frames.

Buffering the movie places all frames in memory. As a result, on Microsoft Windows and perhaps other platforms, a long movie (on the order of several hundred frames) can exhaust memory, depending on system resources. In such cases an error message is issued:

```
??? Error using ==> movie
Could not create movie frame
```

You can abort a movie by typing **Ctrl-C**.

`movie` is not a built-in function. Therefore, you cannot call `movie` using the `builtin` function.

Limitations with Renderer on Windows Systems

Setting the figure `Renderer` property to `painters` works around limitations of using `getframe` with the `OpenGL` renderer on some Windows systems.

See Also

See Also

`frame2im` | `getframe` | `im2frame` | `VideoReader` | `VideoWriter`

Topics

"Record Animation for Playback"

Introduced before R2006a

movmad

Moving median absolute deviation

Syntax

```
M = movmad(A,k)
M = movmad(A,[kb kf])
M = movmad( ___ ,dim)
M = movmad( ___ ,nanflag)
M = movmad( ___ ,Name,Value)
```

Description

`M = movmad(A,k)` returns an array of local `k`-point median absolute deviations (MADs), where each MAD is calculated over a sliding window of length `k` across neighboring elements of `A`. `M` is the same size as `A`.

When `k` is odd, the window is centered about the element in the current position. When `k` is even, the window is centered about the current and previous elements. The window size is automatically truncated at the endpoints when there are not enough elements to fill the window. When the window is truncated, the MAD is taken over only the elements that fill the window.

- If `A` is a vector, then `movmad` operates along the length of the vector.
- If `A` is a multidimensional array, then `movmad` operates along the first array dimension whose size does not equal 1.

`M = movmad(A,[kb kf])` computes the MAD with a window of length `kb+kf+1` that includes the element in the current position, `kb` elements backward, and `kf` elements forward.

`M = movmad( ___ ,dim)` computes the MAD along dimension `dim` for any of the previous syntaxes. For example, `movmad(A,k,2)` for a matrix `A` operates across the columns of `A`, computing the `k`-element sliding MAD for each row.

`M = movmad( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `movmad(A,k,'includenan')` includes all

`NaN` values in the calculation, which is the default. `movmad(A,k,'omitnan')` ignores them and computes the MAD over fewer points.

`M = movmad( ___ ,Name,Value)` specifies additional parameters for the moving MAD using one or more name-value pair arguments. For example, if `x` is a vector of time values, then `movmad(A,k,'SamplePoints',x)` computes the moving MAD of `A` relative to the times in `x`.

Examples

Centered Moving MAD of Vector

Compute the three-point centered moving MAD of a row vector. When there are fewer than three elements in the window at the endpoints, compute over the elements that are available.

```
A = [1 2 4 -1 -2 -3 -1 3 2 1];
M = movmad(A,3)
```

```
M =

  Columns 1 through 7

    0.5000    1.0000    2.0000    1.0000    1.0000    1.0000    2.0000

  Columns 8 through 10

    1.0000    1.0000    0.5000
```

Trailing Moving MAD of Vector

Compute the three-point trailing moving MAD of a row vector. When there are fewer than three elements in the window at the endpoints, compute over the elements that are available.

```
A = [1 2 1 -1 -2 -3 -1 3 4 1];
M = movmad(A,[2 0])
```

```
M =

  Columns 1 through 7

         0    0.5000         0    1.0000    1.0000    1.0000    1.0000

  Columns 8 through 10

    2.0000    1.0000    1.0000
```

Moving MAD of Matrix

Compute the 3-point centered moving MAD for each row of a matrix. The dimension argument is 2, which slides the window across the columns of A. The window starts on the first row, slides horizontally to the end of the row, then moves to the second row, and so on.

```
A = [1 2 1; -1 -2 -3; -1 3 4]
```

```
A =

     1     2     1
    -1    -2    -3
    -1     3     4
```

```
M = movmad(A,3,2)
```

```
M =

    0.5000         0    0.5000
    0.5000    1.0000    0.5000
    2.0000    1.0000    0.5000
```

Moving MAD of Vector with NaN Elements

Compute the three-point centered moving MAD of a row vector containing two NaN elements.

```
A = [2 1 NaN -1 -2 -3 NaN 3 4 1];
```

```
M = movmad(A,3)
```

```
M =

  Columns 1 through 7

    0.5000       NaN       NaN       NaN    1.0000       NaN       NaN

  Columns 8 through 10

       NaN    1.0000    1.5000
```

Recalculate the moving MAD omitting the `NaN` values. When `movmad` discards `NaN` elements, it computes over the remaining elements in the window.

```
M = movmad(A,3,'omitnan')
```

```
M =

  Columns 1 through 7

    0.5000    0.5000    1.0000    0.5000    1.0000    0.5000    3.0000

  Columns 8 through 10

    0.5000    1.0000    1.5000
```

Sample Points for Moving MAD

Compute a 3-hour centered moving MAD of the data in `A` according to the time vector `t`.

```
A = [4 8 6 -1 -2 -3];
k = hours(3);
t = datetime(2016,1,1,0,0,0) + hours(0:5)
```

```
t =

  1×6 datetime array

Columns 1 through 3
```

```
   01-Jan-2016 00:00:00   01-Jan-2016 01:00:00   01-Jan-2016 02:00:00

Columns 4 through 6

   01-Jan-2016 03:00:00   01-Jan-2016 04:00:00   01-Jan-2016 05:00:00
```

```
M = movmad(A,k,'SamplePoints',t)
```

```
M =

    2.0000    2.0000    2.0000    1.0000    1.0000    0.5000
```

Return Only Full-Window MADs

Compute the three-point centered moving MAD of a row vector, but discard any calculation that uses fewer than three points from the output. In other words, return only the MADs computed from a full three-element window, discarding endpoint calculations.

```
A = [1 2 1 -1 -2 -3 -1 3 4 1];
M = movmad(A,3,'Endpoints','discard')
```

```
M =

     0     1     1     1     1     2     1     1
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

k — Window length

numeric or duration scalar

Window length, specified as a numeric or duration scalar. When `k` is a positive integer scalar, the centered MAD includes the element in the current position plus surrounding neighbors. For example, a three-point MAD defined by a window of length three results in the following calculation for a vector `A`:

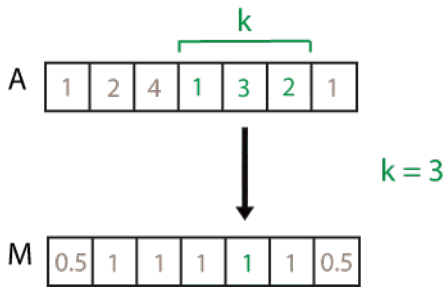

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`[kb kf]` — Directional window length

numeric or duration row vector containing two elements

Directional window length, specified as a numeric or duration row vector containing two elements. When `kb` and `kf` are positive integer scalars, the calculation is over `kb+kf+1` elements. The calculation includes the element in the current position, `kb` elements before the current position, and `kf` elements after the current position. For example, a four-point MAD defined by the directional window `[2 1]` results in the following calculation for a vector `A`:

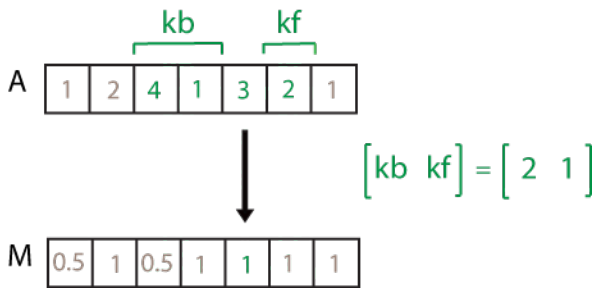

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a matrix `A`.

- If `dim = 1`, then `movmad(A,k,1)` starts with the first column and slides vertically over each row. The MAD is computed over `k` elements at a time. Then it moves to the second column and repeats the computation. This process continues until all columns are exhausted.



- If `dim = 2`, then `movmad(A,k,2)` starts with the first row and slides horizontally across each column, computing over `k` elements at a time. Then it moves to the second row and repeats the computation. This process continues until all rows are exhausted.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition

`'includenan'` (default) | `'omitnan'`

NaN condition, specified as one of these values:

- 'includenan' — Include NaN values from the input when computing the MAD, resulting in NaN output.
- 'omitnan' — Ignore all NaN values in the input. If a window contains only NaN values, then movmad returns NaN.

Name-Value Pair Arguments

Specify optional comma-separated pairs of Name,Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside single quotes (' '). You can specify several name and value pair arguments in any order as Name1,Value1,...,NameN,ValueN.

Example: M = movmad(A,k,'Endpoints','fill')

'Endpoints' — Method to treat windows near endpoints

'shrink' (default) | 'discard' | 'fill' | numeric or logical scalar

Method to treat windows near endpoints, specified as the comma-separated pair consisting of 'Endpoints' and one of the following:

'Endpoints' Value	Description
'shrink'	Shrink the window size near the endpoints of the input to include only existing elements.
'discard'	Do not output any MAD values when the window does not completely overlap with existing elements.
'fill'	Replace nonexisting elements with NaN.
numeric or logical scalar	Replace nonexisting elements with the specified numeric or logical value.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string

'SamplePoints' — Sample points for computing MADs

vector

Sample points for computing MADs, specified as the comma-separated pair consisting of 'SamplePoints' and a vector. The sample points represent the locations of the data

in A. Sample points do not need to be uniformly sampled. By default, the sample points vector is `[1 2 3 ... ]`.

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if `t` is a vector of times corresponding to the input data, then `movmad(rand(1,10),3,'SamplePoints',t)` has a window that represents the time interval between `t(i)-1.5` and `t(i)+1.5`.

When the sample points vector has data type `datetime` or `duration`, then the moving window length must have type `duration`.

If the sample points are nonuniformly spaced and the `'Endpoints'` name-value pair is specified, then its value must be `'shrink'`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `datetime` | `duration`

Definitions

Median Absolute Deviation

For a random variable vector A made up of N scalar observations, the median absolute deviation (MAD) is defined as

$$\text{MAD} = \text{median}\left(\left| A_i - \text{median}(A) \right|\right)$$

for $i = 1,2,\ldots,N$.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'SamplePoints'` name-value pair is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`median` | `movmean` | `movmedian` | `movstd` | `movvar`

Introduced in R2017a

movmax

Moving maximum

Syntax

```
M = movmax(A,k)
M = movmax(A,[kb kf])
M = movmax(___,dim)
M = movmax(___,nanflag)
M = movmax(___,Name,Value)
```

Description

`M = movmax(A,k)` returns an array of local `k`-point maximum values, where each maximum is calculated over a sliding window of length `k` across neighboring elements of `A`. When `k` is odd, the window is centered about the element in the current position. When `k` is even, the window is centered about the current and previous elements. The window size is automatically truncated at the endpoints when there are not enough elements to fill the window. When the window is truncated, the maximum is taken over only the elements that fill the window. `M` is the same size as `A`.

- If `A` is a vector, then `movmax` operates along the length of the vector.
- If `A` is a multidimensional array, then `movmax` operates along the first array dimension whose size does not equal 1.

`M = movmax(A,[kb kf])` computes the maximum with a window of length `kb+kf+1` that includes the element in the current position, `kb` elements backward, and `kf` elements forward.

`M = movmax(___,dim)` returns the array of moving maximums along dimension `dim` for any of the previous syntaxes. For example, if `A` is a matrix, then `movmax(A,k,2)` operates along the columns of `A`, computing the `k`-element sliding maximum for each row.

`M = movmax(___,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `movmax(A,k,'includenan')` includes all `NaN` values in the calculation while `movmax(A,k,'omitnan')` ignores them and computes the maximum over fewer points.

`M = movmax( ___ ,Name,Value)` specifies additional parameters for the moving maximum using one or more name-value pair arguments. For example, if `x` is a vector of time values, then `movmax(A,k,'SamplePoints',x)` computes the moving maximum relative to the times in `x`.

Examples

Centered Moving Maximum of Vector

Compute the three-point centered moving maximum of a row vector. When there are fewer than three elements in the window at the endpoints, take the maximum over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmax(A,3)
```

```
M =

     8     8     8     6    -1    -1     3     4     5     5
```

Trailing Moving Maximum of Vector

Compute the three-point trailing moving maximum of a row vector. When there are fewer than three elements in the window at the endpoints, `movmax` takes the maximum over the number of elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmax(A,[2 0])
```

```
M =

     4     8     8     8     6    -1    -1     3     4     5
```

Moving Maximum of Matrix

Compute the three-point centered moving maximum for each row of a matrix. The window starts on the first row, slides horizontally to the end of the row, then moves to

the second row, and so on. The dimension argument is two, which slides the window across the columns of A.

```
A = [4 8 6; -1 -2 -3; -1 3 4]
```

```
A =

     4     8     6
    -1    -2    -3
    -1     3     4
```

```
M = movmax(A,3,2)
```

```
M =

     8     8     8
    -1    -1    -2
     3     4     4
```

Moving Maximum of Vector with NaN Elements

Compute the three-point centered moving maximum of a row vector containing two NaN elements.

```
A = [4 8 NaN -1 -2 -3 NaN 3 4 5];
M = movmax(A,3)
```

```
M =

     8     8     8    -1    -1    -2     3     4     5     5
```

Recalculate the maximum, but include the NaN values. When taking the maximum over a group of elements containing at least one NaN value, movmax returns NaN.

```
M = movmax(A,3,'includenan')
```

```
M =

     8   NaN   NaN   NaN    -1   NaN   NaN   NaN     5     5
```

Sample Points for Moving Maximum

Compute a 3-hour centered moving maximum of the data in A according to the time vector t.

```
A = [4 8 6 -1 -2 -3];
k = hours(3);
t = datetime(2016,1,1,0,0,0) + hours(0:5)
```

```
t =

  1×6 datetime array

Columns 1 through 3

   01-Jan-2016 00:00:00   01-Jan-2016 01:00:00   01-Jan-2016 02:00:00

Columns 4 through 6

   01-Jan-2016 03:00:00   01-Jan-2016 04:00:00   01-Jan-2016 05:00:00
```

```
M = movmax(A,k,'SamplePoints',t)
```

```
M =

     8     8     8     6    -1    -2
```

Return Only Full-Window Maximums

Compute the three-point centered moving maximum of a row vector, but discard any calculation that uses fewer than three points from the output. In other words, return only the maximums computed from a full three-element window, discarding endpoint calculations.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmax(A,3,'Endpoints','discard')
```

```
M =

     8     8     6    -1    -1     3     4     5
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

k — Window length

numeric or duration scalar

Window length, specified as a numeric or duration scalar. When `k` is a positive integer scalar, the centered maximum includes the element in the current position plus surrounding neighbors. For example, a three-point maximum defined by a window of length three results in the following calculation for a vector `A`:



Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

[kb kf] — Directional window length

numeric or duration row vector containing two elements

Directional window length, specified as a numeric or duration row vector containing two elements. When `kb` and `kf` are positive integer scalars, the calculation is over `kb+kf+1` elements. The calculation includes the element in the current position, `kb` elements before the current position, and `kf` elements after the current position. For example, a four-point maximum defined by the directional window `[2 1]` results in the following calculation for a vector `A`:

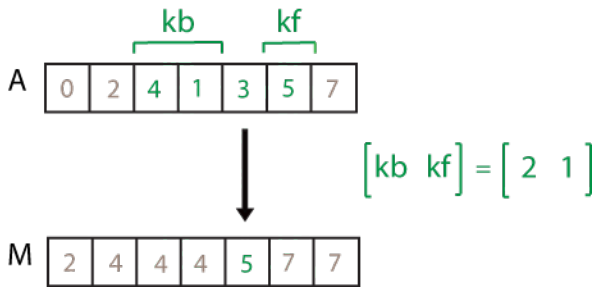

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension that `movmax` operates along, that is, the direction in which the specified window slides.

Consider a two-dimensional input array, `A`.

- If `dim = 1`, then `movmax(A,k,1)` starts with the first column and slides vertically over each row to compute. The maximum is computed over `k` elements at a time. Then it moves to the second column and repeats the computation. This process continues until all columns are exhausted.



- If `dim = 2`, then `movmax(A,k,2)` starts with the first row and slides horizontally across each column. The maximum is computed over `k` elements at a time. Then it moves to the second row and repeats the computation. This process continues until all rows are exhausted.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition
`'omitnan'` (default) | `'includenan'`

`NaN` condition, specified as one of these values:

- `'omitnan'` — Ignore all `NaN` values in the input. If a window includes only `NaN` values, then `movmax` returns `NaN`.
- `'includenan'` — Include `NaN` values from the input when computing the maximum, resulting in the output `NaN`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `M = movmax(A,k,'Endpoints','fill')`

`'Endpoints'` — Method to treat leading and trailing windows
`'shrink'` (default) | `'discard'` | `'fill'` | numeric or logical scalar

Method to treat leading and trailing windows, specified as the comma-separated pair consisting of `'Endpoints'` and one of the following:

'Endpoints' Value	Description
'shrink'	Shrink the window size near the endpoints of the input to include only existing elements.
'discard'	Do not output any maximum values when the window does not completely overlap with existing elements.
'fill'	Substitute nonexisting elements with NaN.
numeric or logical scalar	Substitute nonexisting elements with a specified numeric or logical value.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string

'SamplePoints' — Sample points for computing maximums

vector

Sample points for computing maximums, specified as the comma-separated pair consisting of 'SamplePoints' and a vector. The sample points represent the location of the data in A. Sample points do not need to be uniformly sampled. By default, the sample points vector is [1 2 3 ...].

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if t is a vector of times corresponding to the input data, then movmax(rand(1,10),3,'SamplePoints',t) has a window that represents the time interval between t(i)-1.5 and t(i)+1.5.

When the sample points vector has data type datetime or duration, then the moving window length must have type duration.

If the sample points are nonuniformly spaced and the 'Endpoints' name-value pair is specified, then its value must be 'shrink'.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | datetime | duration

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'SamplePoints'` name-value pair is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`cummax` | `max` | `movmin` | `movsum`

Introduced in R2016a

movmean

Moving mean

Syntax

```
M = movmean(A,k)
M = movmean(A,[kb kf])
M = movmean(___,dim)
M = movmean(___,nanflag)
M = movmean(___,Name,Value)
```

Description

`M = movmean(A,k)` returns an array of local `k`-point mean values, where each mean is calculated over a sliding window of length `k` across neighboring elements of `A`. When `k` is odd, the window is centered about the element in the current position. When `k` is even, the window is centered about the current and previous elements. The window size is automatically truncated at the endpoints when there are not enough elements to fill the window. When the window is truncated, the average is taken over only the elements that fill the window. `M` is the same size as `A`.

- If `A` is a vector, then `movmean` operates along the length of the vector.
- If `A` is a multidimensional array, then `movmean` operates along the first array dimension whose size does not equal 1.

`M = movmean(A,[kb kf])` computes the mean with a window of length `kb+kf+1` that includes the element in the current position, `kb` elements backward, and `kf` elements forward.

`M = movmean(___,dim)` returns the array of moving averages along dimension `dim` for any of the previous syntaxes. For example, if `A` is a matrix, then `movmean(A,k,2)` operates along the columns of `A`, computing the `k`-element sliding mean for each row.

`M = movmean(___,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `movmean(A,k,'includenan')` includes all `NaN` values in the calculation while `movmean(A,k,'omitnan')` ignores them and computes the mean over fewer points.

`M = movmean(___,Name,Value)` specifies additional parameters for the moving average using one or more name-value pair arguments. For example, if `x` is a vector of time values, then `movmean(A,k,'SamplePoints',x)` computes the moving average relative to the times in `x`.

Examples

Centered Moving Average of Vector

Compute the three-point centered moving average of a row vector. When there are fewer than three elements in the window at the endpoints, take the average over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmean(A,3)
```

```
M =

    6.0000    6.0000    4.3333    1.0000   -2.0000   -2.0000   -0.3333    2.0000    4.0
```

Trailing Moving Average of Vector

Compute the three-point trailing moving average of a row vector. When there are fewer than three elements in the window at the endpoints, take the average over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmean(A,[2 0])
```

```
M =

    4.0000    6.0000    6.0000    4.3333    1.0000   -2.0000   -2.0000   -0.3333    2.0
```

Moving Average of Matrix

Compute the three-point centered moving average for each row of a matrix. The window starts on the first row, slides horizontally to the end of the row, then moves to the second

row, and so on. The dimension argument is two, which slides the window across the columns of A.

```
A = [4 8 6; -1 -2 -3; -1 3 4]
```

```
A =

     4     8     6
    -1    -2    -3
    -1     3     4
```

```
M = movmean(A,3,2)
```

```
M =

    6.0000    6.0000    7.0000
   -1.5000   -2.0000   -2.5000
    1.0000    2.0000    3.5000
```

Moving Average of Vector with NaN Elements

Compute the three-point centered moving average of a row vector containing two NaN elements.

```
A = [4 8 NaN -1 -2 -3 NaN 3 4 5];
M = movmean(A,3)
```

```
M =

    6.0000       NaN       NaN       NaN   -2.0000       NaN       NaN       NaN    4.0
```

Recalculate the average, but omit the NaN values. When movmean discards NaN elements, it takes the average over the remaining elements in the window.

```
M = movmean(A,3,'omitnan')
```

```
M =

    6.0000    6.0000    3.5000   -1.5000   -2.0000   -2.5000         0    3.5000    4.0
```

Sample Points for Moving Average

Compute a 3-hour centered moving average of the data in A according to the time vector t.

```
A = [4 8 6 -1 -2 -3];
k = hours(3);
t = datetime(2016,1,1,0,0,0) + hours(0:5)
```

```
t =

  1×6 datetime array

Columns 1 through 3

   01-Jan-2016 00:00:00   01-Jan-2016 01:00:00   01-Jan-2016 02:00:00

Columns 4 through 6

   01-Jan-2016 03:00:00   01-Jan-2016 04:00:00   01-Jan-2016 05:00:00
```

```
M = movmean(A,k,'SamplePoints',t)
```

```
M =

    6.0000    6.0000    4.3333    1.0000   -2.0000   -2.5000
```

Return Only Full-Window Averages

Compute the three-point centered moving average of a row vector, but discard any calculation that uses fewer than three points from the output. In other words, return only the averages computed from a full three-element window, discarding endpoint calculations.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmean(A,3,'Endpoints','discard')
```

```
M =

    6.0000    4.3333    1.0000   -2.0000   -2.0000   -0.3333    2.0000    4.0000
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

k — Window length

numeric or duration scalar

Window length, specified as a numeric or duration scalar. When `k` is a positive integer scalar, the centered average includes the element in the current position plus surrounding neighbors. For example, a three-point average defined by a window of length three results in the following calculation for a vector `A`:



Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`[kb kf]` — Directional window length

numeric or duration row vector containing two elements

Directional window length, specified as a numeric or duration row vector containing two elements. When `kb` and `kf` are positive integer scalars, the calculation is over `kb+kf+1` elements. The calculation includes the element in the current position, `kb` elements before the current position, and `kf` elements after the current position. For example, a four-point average defined by the directional window `[2 1]` results in the following calculation for a vector `A`:

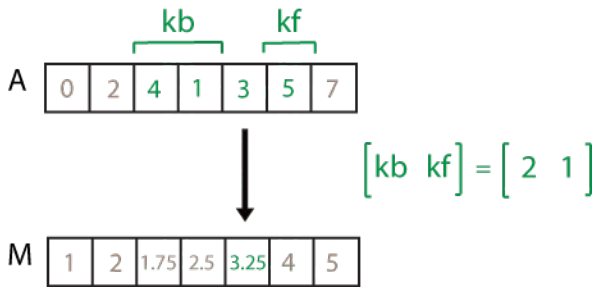

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension that `movmean` operates along, that is, the direction in which the specified window slides.

Consider a two-dimensional input array, `A`.

- If `dim = 1`, then `movmean(A,k,1)` starts with the first column and slides vertically over each row. The mean is computed over `k` elements at a time. Then it moves to the second column and repeats the computation. This process continues until all columns are exhausted.



- If `dim = 2`, then `movmean(A,k,2)` starts with the first row and slides horizontally across each column. The mean is computed over `k` elements at a time. Then it moves to the second row and repeats the computation. This process continues until all rows are exhausted.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition
`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of these values:

- `'includenan'` — Include `NaN` values from the input when computing the mean, resulting in `NaN` output.
- `'omitnan'` — Ignore all `NaN` values in the input. If a window contains only `NaN` values, then `movmean` returns `NaN`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `M = movmean(A,k,'Endpoints','fill')`

`'Endpoints'` — Method to treat leading and trailing windows
`'shrink'` (default) | `'discard'` | `'fill'` | numeric or logical scalar

Method to treat leading and trailing windows, specified as the comma-separated pair consisting of `'Endpoints'` and one of the following:

'Endpoints' Value	Description
'shrink'	Shrink the window size near the endpoints of the input to include only existing elements.
'discard'	Do not output any averages when the window does not completely overlap with existing elements.
'fill'	Substitute nonexisting elements with NaN.
numeric or logical scalar	Substitute nonexisting elements with a specified numeric or logical value.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string

'SamplePoints' — Sample points for computing averages
vector

Sample points for computing averages, specified as the comma-separated pair consisting of 'SamplePoints' and a vector. The sample points represent the location of the data in A. Sample points do not need to be uniformly sampled. By default, the sample points vector is [1 2 3 ...].

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if t is a vector times corresponding to the input data, then movmean(rand(1,10),3,'SamplePoints',t) has a window that represents the time interval between t(i)-1.5 and t(i)+1.5.

When the sample points vector has data type datetime or duration, then the moving window length must have type duration.

If the sample points are nonuniformly spaced and the 'Endpoints' name-value pair is specified, then its value must be 'shrink'.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | datetime | duration

Definitions

Mean

For a random variable vector A made up of N scalar observations, the mean is defined as

$$\mu = \frac{1}{N}\sum_{i=1}^{N} A_i.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'SamplePoints'` name-value pair is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`mean` | `movmad` | `movmedian` | `movstd` | `movsum` | `movvar`

Introduced in R2016a

movmedian

Moving median

Syntax

```
M = movmedian(A,k)
M = movmedian(A,[kb kf])
M = movmedian(___,dim)
M = movmedian(___,nanflag)
M = movmedian(___,Name,Value)
```

Description

`M = movmedian(A,k)` returns an array of local `k`-point median values, where each median is calculated over a sliding window of length `k` across neighboring elements of `A`. When `k` is odd, the window is centered about the element in the current position. When `k` is even, the window is centered about the current and previous elements. The window size is automatically truncated at the endpoints when there are not enough elements to fill the window. When the window is truncated, the median is taken over only the elements that fill the window. `M` is the same size as `A`.

- If `A` is a vector, then `movmedian` operates along the length of the vector.
- If `A` is a multidimensional array, then `movmedian` operates along the first array dimension whose size does not equal 1.

`M = movmedian(A,[kb kf])` computes the median with a window of length `kb+kf+1` that includes the element in the current position, `kb` elements backward, and `kf` elements forward.

`M = movmedian(___,dim)` returns the array of moving medians along dimension `dim` for any of the previous syntaxes. For example, if `A` is a matrix, then `movmedian(A,k,2)` operates along the columns of `A`, computing the `k`-element sliding median for each row.

`M = movmedian(___,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `movmedian(A,k,'includenan')` includes all `NaN` values in the calculation while `movmedian(A,k,'omitnan')` ignores them and computes the median over fewer points.

`M = movmedian( ___ ,Name,Value)` specifies additional parameters for the moving median using one or more name-value pair arguments. For example, if `x` is a vector of time values, then `movmedian(A,k,'SamplePoints',x)` computes the moving median relative to the times in `x`.

Examples

Centered Moving Median of Vector

Compute the three-point centered moving median of a row vector. When there are fewer than three elements in the window at the endpoints, take the average over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmedian(A,3)
```

```
M =

    6.0000    6.0000    6.0000   -1.0000   -2.0000   -2.0000   -1.0000    3.0000    4.0
```

Trailing Moving Median of Vector

Compute the three-point trailing moving median of a row vector. When there are fewer than three elements in the window at the endpoints, take the average over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmedian(A,[2 0])
```

```
M =

     4     6     6     6    -1    -2    -2    -1     3     4
```

Moving Median of Matrix

Compute the three-point centered moving median for each row of a matrix. The window starts on the first row, slides horizontally to the end of the row, then moves to the second

row, and so on. The dimension argument is two, which slides the window across the columns of A.

```
A = [4 8 6; -1 -2 -3; -1 3 4]
```

```
A =

     4     8     6
    -1    -2    -3
    -1     3     4
```

```
M = movmedian(A,3,2)
```

```
M =

    6.0000    6.0000    7.0000
   -1.5000   -2.0000   -2.5000
    1.0000    3.0000    3.5000
```

Moving Median of Vector with NaN Elements

Compute the three-point centered moving median of a row vector containing NaN elements.

```
A = [4 8 NaN -1 -2 -3 NaN 3 4 5];
M = movmedian(A,3)
```

```
M =

    6.0000       NaN       NaN       NaN   -2.0000       NaN       NaN       NaN    4.0
```

Recalculate the median, but omit the NaN values. When movmedian discards NaN elements, it takes the median over the remaining elements in the window.

```
M = movmedian(A,3,'omitnan')
```

```
M =

    6.0000    6.0000    3.5000   -1.5000   -2.0000   -2.5000         0    3.5000    4.0
```

Sample Points for Moving Median

Compute a 3-hour centered moving median of the data in A according to the time vector t.

```
A = [4 8 6 -1 -2 -3];
k = hours(3);
t = datetime(2016,1,1,0,0,0) + hours(0:5)
```

```
t =

  1×6 datetime array

Columns 1 through 3

   01-Jan-2016 00:00:00   01-Jan-2016 01:00:00   01-Jan-2016 02:00:00

Columns 4 through 6

   01-Jan-2016 03:00:00   01-Jan-2016 04:00:00   01-Jan-2016 05:00:00
```

```
M = movmedian(A,k,'SamplePoints',t)
```

```
M =

    6.0000    6.0000    6.0000   -1.0000   -2.0000   -2.5000
```

Return Only Full-Window Medians

Compute the three-point centered moving median of a row vector, but discard any calculation that uses fewer than three points from the output. In other words, return only the medians computed from a full three-element window, discarding endpoint calculations.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmedian(A,3,'Endpoints','discard')
```

```
M =

     6     6    -1    -2    -2    -1     3     4
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

k — Window length

numeric or duration scalar

Window length, specified as a numeric or duration scalar. When `k` is a positive integer scalar, the centered median includes the element in the current position plus surrounding neighbors. For example, a three-point median defined by a window of length three results in the following calculation for a vector `A`:



Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

[kb kf] — Directional window length

numeric or duration row vector containing two elements

Directional window length, specified as a numeric or duration row vector containing two elements. When `kb` and `kf` are positive integer scalars, the calculation is over `kb+kf+1` elements. The calculation includes the element in the current position, `kb` elements before the current position, and `kf` elements after the current position. For example, a four-point median defined by the directional window `[2 1]` results in the following calculation for a vector `A`:

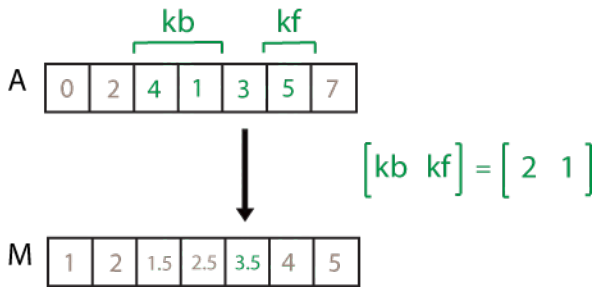

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension that `movmedian` operates along, that is, the direction in which the specified window slides.

Consider a two-dimensional input array, `A`.

- If `dim = 1`, then `movmedian(A,k,1)` starts with the first column and slides vertically over each row. The median is computed over `k` elements at a time. Then it moves to the second column and repeats the computation. This process continues until all columns are exhausted.



- If `dim = 2`, then `movmedian(A,k,2)` starts with the first row and slides horizontally across each column. The median is computed over `k` elements at a time. Then it moves to the second row and repeats the computation. This process continues until all rows are exhausted.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition
`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of these values:

- `'includenan'` — Include `NaN` values from the input when computing the median, resulting in the output `NaN`.
- `'omitnan'` — Ignore all `NaN` values in the input. If a window contains only `NaN` values, then `movmedian` returns `NaN`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `M = movmedian(A,k,'Endpoints','fill')`

`'Endpoints'` — Method to treat leading and trailing windows
`'shrink'` (default) | `'discard'` | `'fill'` | numeric or logical scalar

Method to treat leading and trailing windows, specified as the comma-separated pair consisting of `'Endpoints'` and one of the following:

'Endpoints' Value	Description
'shrink'	Shrink the window size near the endpoints of the input to include only existing elements.
'discard'	Do not output any medians when the window does not completely overlap with existing elements.
'fill'	Substitute nonexisting elements with NaN.
numeric or logical scalar	Substitute nonexisting elements with a specified numeric or logical value.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string

'SamplePoints' — Sample points for computing medians

vector

Sample points for computing medians, specified as the comma-separated pair consisting of 'SamplePoints' and a vector. The sample points represent the location of the data in A. Sample points do not need to be uniformly sampled. By default, the sample points vector is [1 2 3 ...].

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if t is a vector of times corresponding to the input data, then movmedian(rand(1,10),3,'SamplePoints',t) has a window that represents the time interval between t(i)-1.5 and t(i)+1.5.

When the sample points vector has data type datetime or duration, then the moving window length must have type duration.

If the sample points are nonuniformly spaced and the 'Endpoints' name-value pair is specified, then its value must be 'shrink'.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | datetime | duration

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'SamplePoints'` name-value pair is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`median` | `movmad` | `movmean` | `movstd` | `movvar`

Introduced in R2016a

movmin

Moving minimum

Syntax

```
M = movmin(A,k)
M = movmin(A,[kb kf])
M = movmin( ___ ,dim)
M = movmin( ___ ,nanflag)
M = movmin( ___ ,Name,Value)
```

Description

`M = movmin(A,k)` returns an array of local `k`-point centered minimum values, where each minimum is calculated over a sliding window of length `k` across neighboring elements of `A`. When `k` is odd, the window is centered about the element in the current position. When `k` is even, the window is centered about the current and previous elements. The window size is automatically truncated at the endpoints when there are not enough elements to fill the window. When the window is truncated, the minimum is taken over only the elements that fill the window. `M` is the same size as `A`.

- If `A` is a vector, then `movmin` operates along the length of the vector.
- If `A` is a multidimensional array, then `movmin` operates along the first array dimension whose size does not equal 1.

`M = movmin(A,[kb kf])` computes the minimum with a window of length `kb+kf +1` that includes the element in the current position, `kb` elements backward, and `kf` elements forward.

`M = movmin( ___ ,dim)` returns the array of sliding minimums along dimension `dim` for any of the previous syntaxes. For example, if `A` is a matrix, then `movmin(A,k,2)` operates along the columns of `A`, computing the `k`-element sliding minimum for each row.

`M = movmin( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `movmin(A,k,'includenan')` includes all `NaN` values in the calculation while `movmin(A,k,'omitnan')` ignores them and computes the minimum over fewer points.

`M = movmin(___,Name,Value)` specifies additional parameters for the minimum using one or more name-value pair arguments. For example, if `x` is a vector of time values, then `movmin(A,k,'SamplePoints',x)` computes the moving minimum relative to the times in `x`.

Examples

Centered Moving Minimum of Vector

Compute the three-point centered moving minimum of a row vector. When there are fewer than three elements in the window at the endpoints, take the minimum over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmin(A,3)
```

```
M =

     4     4    -1    -2    -3    -3    -3    -1     3     4
```

Trailing Moving Minimum of Vector

Compute the three-point trailing moving minimum of a row vector. When there are fewer than three elements in the window at the endpoints, take the minimum over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmin(A,[2 0])
```

```
M =

     4     4     4    -1    -2    -3    -3    -3    -1     3
```

Moving Minimum of Matrix

Compute the three-point centered moving minimum for each row of a matrix. The window starts on the first row, slides horizontally to the end of the row, then moves to

the second row, and so on. The dimension argument is two, which slides the window across the columns of A.

```
A = [4 8 6; -1 -2 -3; -1 3 4]
```

```
A =

     4     8     6
    -1    -2    -3
    -1     3     4
```

```
M = movmin(A,3,2)
```

```
M =

     4     4     6
    -2    -3    -3
    -1    -1     3
```

Moving Minimum of Vector with NaN Elements

Compute the three-point centered moving minimum of a row vector containing two NaN elements.

```
A = [4 8 NaN -1 -2 -3 NaN 3 4 5];
M = movmin(A,3)
```

```
M =

     4     4    -1    -2    -3    -3    -3     3     3     4
```

Recalculate the minimum, but include the NaN values. When taking the minimum over a group of elements containing at least one NaN value, movmin returns NaN.

```
M = movmin(A,3,'includenan')
```

```
M =

     4   NaN   NaN   NaN    -3   NaN   NaN   NaN     3     4
```

Sample Points for Moving Minimum

Compute a 3-hour centered moving minimum of the data in A according to the time vector t.

```
A = [4 8 6 -1 -2 -3];
k = hours(3);
t = datetime(2016,1,1,0,0,0) + hours(0:5)
```

```
t =

  1×6 datetime array

Columns 1 through 3

   01-Jan-2016 00:00:00   01-Jan-2016 01:00:00   01-Jan-2016 02:00:00

Columns 4 through 6

   01-Jan-2016 03:00:00   01-Jan-2016 04:00:00   01-Jan-2016 05:00:00
```

```
M = movmin(A,k,'SamplePoints',t)
```

```
M =

     4     4    -1    -2    -3    -3
```

Return Only Full-Window Minimums

Compute the three-point centered moving minimum of a row vector, but discard any calculation that uses fewer than three points from the output. In other words, return only the minimums computed from a full three-element window, discarding endpoint calculations.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movmin(A,3,'Endpoints','discard')
```

```
M =

     4    -1    -2    -3    -3    -3    -1     3
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

k — Window length

numeric or duration scalar

Window length, specified as a numeric or duration scalar. When `k` is a positive integer scalar, the centered minimum includes the element in the current position plus surrounding neighbors. For example, a three-point minimum defined by a window of length three results in the following calculation for a vector `A`:



Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

[kb kf] — Directional window length

numeric or duration row vector containing two elements

Directional window length, specified as a numeric or duration row vector containing two elements. When `kb` and `kf` are positive integer scalars, the calculation is over `kb+kf+1` elements. The calculation includes the element in the current position, `kb` elements before the current position, and `kf` elements after the current position. For example, a four-point minimum defined by the directional window `[2 1]` results in the following calculation for a vector `A`:

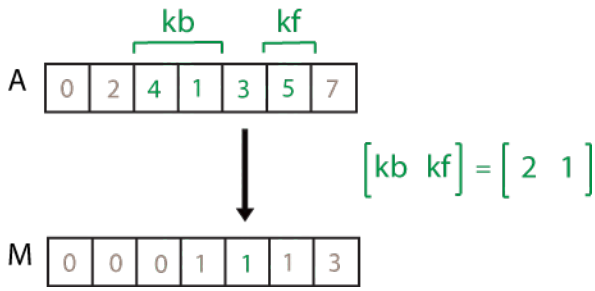

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension that `movmin` operates along, that is, the direction in which the specified window slides.

Consider a two-dimensional input array, `A`.

- If `dim = 1`, then `movmin(A,k,1)` starts with the first column and slides vertically over each row. The minimum is computed over `k` elements at a time. Then it moves to the second column and repeats the computation. This process continues until all columns are exhausted.



- If `dim = 2`, then `movmin(A,k,2)` starts with the first row and slides horizontally across each column. The minimum is computed over `k` elements at a time. Then it moves to the second row and repeats the computation. This process continues until all rows are exhausted.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition
`'omitnan'` (default) | `'includenan'`

`NaN` condition, specified as one of these values:

- `'omitnan'` — Ignore all `NaN` values in the input. If a window contains only `NaN` values, then `movmin` returns `NaN`.
- `'includenan'` — Include `NaN` values from the input when computing the minimum, resulting in the output `NaN`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `M = movmin(A,k,'Endpoints','fill')`

`'Endpoints'` — Method to treat leading and trailing windows
`'shrink'` (default) | `'discard'` | `'fill'` | numeric or logical scalar

Method to treat leading and trailing windows, specified as the comma-separated pair consisting of `'Endpoints'` and one of the following:

'Endpoints' Value	Description
'shrink'	Shrink the window size near the endpoints of the input to include only existing elements.
'discard'	Do not output any minimums when the window does not completely overlap with existing elements.
'fill'	Substitute nonexisting elements with NaN.
numeric or logical scalar	Substitute nonexisting elements with a specified numeric or logical value.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string

'SamplePoints' — Sample points for computing minimums

vector

Sample points for computing minimums, specified as the comma-separated pair consisting of 'SamplePoints' and a vector. The sample points represent the location of the data in A. Sample points do not need to be uniformly sampled. By default, the sample points vector is [1 2 3 ...].

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if t is a vector of times corresponding to the input data, then movmin(rand(1,10),3,'SamplePoints',t) has a window that represents the time interval between t(i)-1.5 and t(i)+1.5.

When the sample points vector has data type datetime or duration, then the moving window length must have type duration.

If the sample points are nonuniformly spaced and the 'Endpoints' name-value pair is specified, then its value must be 'shrink'.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | datetime | duration

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'SamplePoints'` name-value pair is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`cummin` | `min` | `movmax` | `movsum`

Introduced in R2016a

movprod

Moving product

Syntax

```
M = movprod(A,k)
M = movprod(A,[kb kf])
M = movprod( ___ ,dim)
M = movprod( ___ ,nanflag)
M = movprod( ___ ,Name,Value)
```

Description

`M = movprod(A,k)` returns an array of local `k`-point products, where each product is calculated over a sliding window of length `k` across neighboring elements of `A`. `M` is the same size as `A`.

When `k` is odd, the window is centered about the element in the current position. When `k` is even, the window is centered about the current and previous elements. The window size is automatically truncated at the endpoints when there are not enough elements to fill the window. When the window is truncated, the product is taken over only the elements that fill the window.

- If `A` is a vector, then `movprod` operates along the length of the vector.
- If `A` is a multidimensional array, then `movprod` operates along the first array dimension whose size does not equal 1.

`M = movprod(A,[kb kf])` computes the product with a window of length `kb+kf+1` that includes the element in the current position, `kb` elements backward, and `kf` elements forward.

`M = movprod( ___ ,dim)` computes the product along dimension `dim` for any of the previous syntaxes. For example, if `A` is a matrix, then `movprod(A,k,2)` operates across the columns of `A`, computing the `k`-element sliding product for each row.

`M = movprod( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `movprod(A,k,'includenan')` includes all

NaN values in the calculation, which is the default. `movprod(A,k,'omitnan')` ignores them and computes the product over fewer points.

`M = movprod(___,Name,Value)` specifies additional parameters for the moving product using one or more name-value pair arguments. For example, if `x` is a vector of time values, then `movprod(A,k,'SamplePoints',x)` computes the moving product relative to the times in `x`.

Examples

Centered Moving Product of Vector

Compute the three-point centered moving product of a row vector. When there are fewer than three elements in the window at the endpoints, take the product over the elements that are available.

```
A = [1 2 4 -1 -2 -3 -1 3 2 1];
M = movprod(A,3)
```

```
M =

     2     8    -8     8    -6    -6     9    -6     6     2
```

Trailing Moving Product of Vector

Compute the three-point trailing moving product of a row vector. When there are fewer than three elements in the window at the endpoints, take the product over the elements that are available.

```
A = [1 2 1 -1 -2 -3 -1 3 4 1];
M = movprod(A,[2 0])
```

```
M =

     1     2     2    -2     2    -6    -6     9   -12    12
```

Moving Product of Matrix

Compute the 3-point centered moving product for each row of a matrix. The dimension argument is 2, which slides the window across the columns of `A`. The window starts on

the first row, slides horizontally to the end of the row, then moves to the second row, and so on.

```
A = [1 2 1; -1 -2 -3; -1 3 4]
```

```
A =

     1     2     1
    -1    -2    -3
    -1     3     4
```

```
M = movprod(A,3,2)
```

```
M =

     2     2     2
     2    -6     6
    -3   -12    12
```

Moving Product of Vector with NaN Elements

Compute the three-point centered moving product of a row vector containing two NaN elements.

```
A = [2 1 NaN -1 -2 -3 NaN 3 4 1];
M = movprod(A,3)
```

```
M =

     2   NaN   NaN   NaN    -6   NaN   NaN   NaN    12     4
```

Recalculate the product, but omit the NaN values. When movprod discards NaN elements, it takes the product over the remaining elements in the window.

```
M = movprod(A,3,'omitnan')
```

```
M =

     2     2    -1     2    -6     6    -9    12    12     4
```

Sample Points for Moving Product

Compute a 3-hour centered moving product of the data in A according to the time vector t.

```
A = [4 8 6 -1 -2 -3];
k = hours(3);
t = datetime(2016,1,1,0,0,0) + hours(0:5)
```

```
t =

  1×6 datetime array

Columns 1 through 3

   01-Jan-2016 00:00:00   01-Jan-2016 01:00:00   01-Jan-2016 02:00:00

Columns 4 through 6

   01-Jan-2016 03:00:00   01-Jan-2016 04:00:00   01-Jan-2016 05:00:00
```

```
M = movprod(A,k,'SamplePoints',t)
```

```
M =

    32   192   -48    12    -6     6
```

Return Only Full-Window Products

Compute the three-point centered moving product of a row vector, but discard any calculation that uses fewer than three points from the output. In other words, return only the products computed from a full three-element window, discarding endpoint calculations.

```
A = [1 2 1 -1 -2 -3 -1 3 4 1];
M = movprod(A,3,'Endpoints','discard')
```

```
M =
```

```
     2    -2     2    -6    -6     9   -12    12
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

k — Window length

numeric or duration scalar

Window length, specified as a numeric or duration scalar. When `k` is a positive integer scalar, the centered product includes the element in the current position plus surrounding neighbors. For example, a three-point product defined by a window of length three results in the following calculation for a vector `A`:

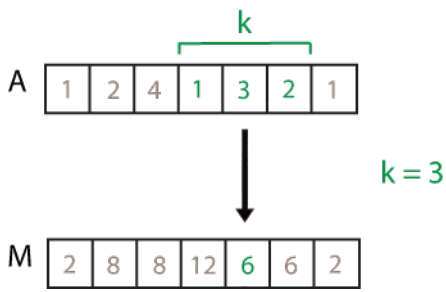

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

[kb kf] — Directional window length

numeric or duration row vector containing two elements

Directional window length, specified as a numeric or duration row vector containing two elements. When `kb` and `kf` are positive integer scalars, the calculation is over `kb+kf+1` elements. The calculation includes the element in the current position, `kb` elements

before the current position, and `kf` elements after the current position. For example, a four-point MAD defined by the directional window `[2 1]` results in the following calculation for a vector `A`:

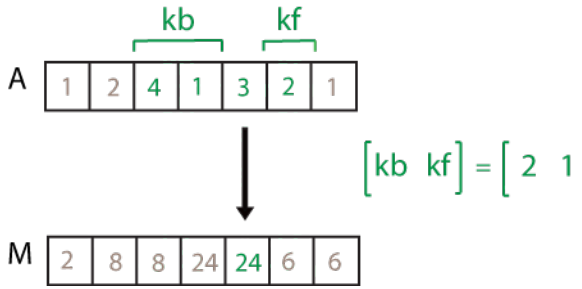

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a matrix `A`.

- If `dim = 1`, then `movprod(A,k,1)` starts with the first column and slides vertically over each row. The product is computed over `k` elements at a time. Then it moves to the second column and repeats the computation. This process continues until all columns are exhausted.



- If `dim = 2`, then `movprod(A,k,2)` starts with the first row and slides horizontally across each column. The product is computed over `k` elements at a time. Then it moves to the second row and repeats the computation. This process continues until all rows are exhausted.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition
`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of these values:

- `'includenan'` — Include `NaN` values from the input when computing the product, resulting in `NaN` output.
- `'omitnan'` — Ignore all `NaN` values in the input. If a window contains only `NaN` values, then `movprod` returns 1.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `M = movprod(A,k,'Endpoints','fill')`

`'Endpoints'` — Method to treat windows near endpoints
`'shrink'` (default) | `'discard'` | `'fill'` | numeric or logical scalar

Method to treat windows near endpoints, specified as the comma-separated pair consisting of `'Endpoints'` and one of the following:

'Endpoints' Value	Description
'shrink'	Shrink the window size near the endpoints of the input to include only existing elements.
'discard'	Do not output any products when the window does not completely overlap with existing elements.
'fill'	Replace nonexisting elements with NaN.
numeric or logical scalar	Replace nonexisting elements with the specified numeric or logical value.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string

'SamplePoints' — Sample points for computing products

vector

Sample points for computing products, specified as the comma-separated pair consisting of 'SamplePoints' and a vector. The sample points represent the locations of the data in A. Sample points do not need to be uniformly sampled. By default, the sample points vector is [1 2 3 ...].

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if t is a vector of times corresponding to the input data, then movprod(rand(1,10),3,'SamplePoints',t) has a window that represents the time interval between t(i)-1.5 and t(i)+1.5.

When the sample points vector has data type datetime or duration, then the moving window length must have type duration.

If the sample points are nonuniformly spaced and the 'Endpoints' name-value pair is specified, then its value must be 'shrink'.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | datetime | duration

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'SamplePoints'` name-value pair is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`cumprod` | `movsum` | `prod`

Introduced in R2017a

movstd

Moving standard deviation

Syntax

```
M = movstd(A,k)
M = movstd(A,[kb kf])
M = movstd(___,w)
M = movstd(___,w,dim)
M = movstd(___,nanflag)
M = movstd(___,Name,Value)
```

Description

`M = movstd(A,k)` returns an array of local `k`-point standard deviation values. Each standard deviation is calculated over a sliding window of length `k` across neighboring elements of `A`. When `k` is odd, the window is centered about the element in the current position. When `k` is even, the window is centered about the current and previous elements. The window size is automatically truncated at the endpoints when there are not enough elements to fill the window. When the window is truncated, the standard deviation is taken over only the elements that fill the window. `M` is the same size as `A`.

- If `A` is a vector, then `movstd` operates along the length of the vector.
- If `A` is a multidimensional array, then `movstd` operates along the first array dimension whose size does not equal 1.

`M = movstd(A,[kb kf])` computes the standard deviation with a window of length `kb+kf+1`. The calculation includes the element in the current position, `kb` elements backward, and `kf` elements forward.

`M = movstd(___,w)` specifies a normalization factor for any of the previous syntaxes. When `w = 0` (default), `M` is normalized by `k-1` for window length `k`. When `w = 1`, `M` is normalized by `k`.

`M = movstd(___,w,dim)` returns the array of sliding standard deviations along dimension `dim` for any of the previous syntaxes. Always specify the weight `w` from the previous syntax when specifying `dim`. For example, `movstd(A,k,0,2)` operates along

the columns of a matrix `A`, computing the `k`-element sliding standard deviation for each row. The normalization factor is the default, `k-1`.

`M = movstd(___,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `movstd(A,k,'includenan')` includes all `NaN` values in the calculation while `movstd(A,k,'omitnan')` ignores them and computes the standard deviation over fewer points.

`M = movstd(___,Name,Value)` specifies additional parameters for the standard deviation using one or more name-value pair arguments. For example, if `x` is a time vector, then `movstd(A,k,'SamplePoints',x)` computes the moving standard deviation relative to the times in `x`.

Examples

Centered Moving Standard Deviation of Vector

Compute the three-point centered moving standard deviation of a row vector. When there are fewer than three elements in the window at the endpoints, take the standard deviation over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movstd(A,3)
```

```
M =

    2.8284    2.0000    4.7258    4.3589    1.0000    1.0000    3.0551    2.6458    1.0
```

Trailing Moving Standard Deviation of Vector

Compute the three-point trailing moving standard deviation of a row vector. When there are fewer than three elements in the window at the endpoints, take the standard deviation over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movstd(A,[2 0])
```

```
M =

         0    2.8284    2.0000    4.7258    4.3589    1.0000    1.0000    3.0551    2.6
```

Specify Normalization for Moving Standard Deviation

Compute the three-point centered moving standard deviation of a row vector and normalize each standard deviation by the number of elements in the window.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movstd(A,3,1)
```

```
M =

    2.0000    1.6330    3.8586    3.5590    0.8165    0.8165    2.4944    2.1602    0.8
```

Moving Standard Deviation of Matrix

Compute the three-point centered moving standard deviation for each row of a matrix. The window starts on the first row, slides horizontally to the end of the row, then moves to the second row, and so on. The dimension argument is two, which slides the window across the columns of `A`. Always specify the normalization factor when specifying the dimension.

```
A = [4 8 6; -1 -2 -3; -1 3 4];
M = movstd(A,3,0,2)
```

```
M =

    2.8284    2.0000    1.4142
    0.7071    1.0000    0.7071
    2.8284    2.6458    0.7071
```

Moving Standard Deviation of Vector with `NaN` Elements

Compute the three-point centered moving standard deviation of a row vector containing two `NaN` elements.

```
A = [4 8 NaN -1 -2 -3 NaN 3 4 5];
M = movstd(A,3)
```

```
M =

    2.8284       NaN       NaN       NaN    1.0000       NaN       NaN       NaN    1.0
```

Recalculate the standard deviation, but omit the NaN values. When movstd discards NaN elements, it takes the standard deviation over the remaining elements in the window.

```
M = movstd(A,3,'omitnan')
```

```
M =

    2.8284    2.8284    6.3640    0.7071    1.0000    0.7071    4.2426    0.7071    1.0
```

Sample Points for Moving Standard Deviation

Compute a 3-hour centered moving standard deviation of the data in A according to the time vector t.

```
A = [4 8 6 -1 -2 -3];
k = hours(3);
t = datetime(2016,1,1,0,0,0) + hours(0:5)
```

```
t =

  1×6 datetime array

Columns 1 through 3

   01-Jan-2016 00:00:00   01-Jan-2016 01:00:00   01-Jan-2016 02:00:00

Columns 4 through 6

   01-Jan-2016 03:00:00   01-Jan-2016 04:00:00   01-Jan-2016 05:00:00
```

```
M = movstd(A,k,'SamplePoints',t)
```

```
M =

    2.8284    2.0000    4.7258    4.3589    1.0000    0.7071
```

Return Only Full-Window Standard Deviations

Compute the three-point centered moving standard deviation of a row vector, but discard any calculation that uses fewer than three points from the output. In other words, return

only the standard deviations computed from a full three-element window, discarding endpoint calculations.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movstd(A,3,'Endpoints','discard')
```

```
M =

    2.0000    4.7258    4.3589    1.0000    1.0000    3.0551    2.6458    1.0000
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `logical`

k — Window length

numeric or duration scalar

Window length, specified as a numeric or duration scalar. When `k` is a positive integer scalar, the centered standard deviation includes the element in the current position plus surrounding neighbors. For example, a three-point standard deviation defined by a window of length three results in the following calculation for a vector `A`:



Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`[kb kf]` — Directional window length

numeric or duration row vector containing two elements

Directional window length, specified as a numeric or duration row vector containing two elements. When `kb` and `kf` are positive integer scalars, the calculation is over `kb+kf+1` elements. The calculation includes the element in the current position, `kb` elements before the current position, and `kf` elements after the current position. For example, a four-point standard deviation defined by the directional window `[2 1]` results in the following calculation for a vector `A`:

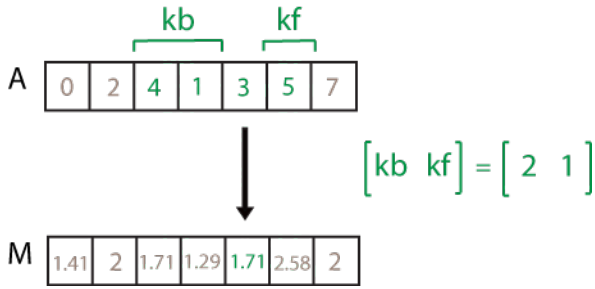

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`w` — Weight

`0` (default) | `1`

Weight, specified as one of these values:

- `0` — Normalize by `k-1`, where `k` is the window length. If `k=1`, the weight is `k`.
- `1` — Normalize by `k`.

Data Types: `single` | `double`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension that `movstd` operates along, that is, the direction in which the specified window slides.

Consider a two-dimensional input array, `A`.

- If `dim = 1`, then `movstd(A,k,0,1)` starts with the first column and slides vertically over each row. The standard deviation is taken over `k` elements at a time. Then it moves to the second column and repeats the computation. This process continues until all columns are exhausted. The argument `0` specifies the default weight, which is required when specifying `dim`.



- If `dim = 2`, then `movstd(A,k,0,2)` starts with the first row and slides horizontally across each column. The standard deviation is taken over `k` elements at a time. Then it moves to the second row and repeats the computation. This process continues until all rows are exhausted. The argument `0` specifies the default weight, which is required when specifying `dim`.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition
`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of these values:

- `'includenan'` — Include `NaN` values from the input when computing the standard deviation, resulting in the output `NaN`.
- `'omitnan'` — Ignore all `NaN` values in the input. If a window contains only `NaN` values, then `movstd` returns `NaN`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `M = movstd(A,k,'Endpoints','fill')`

`'Endpoints'` — Method to treat leading and trailing windows

`'shrink'` (default) | `'discard'` | `'fill'` | numeric or logical scalar

Method to treat leading and trailing windows, specified as the comma-separated pair consisting of `'Endpoints'` and one of the following:

`'Endpoints'` Value	Description
`'shrink'`	Shrink the window size near the endpoints of the input to include only existing elements.
`'discard'`	Do not output any standard deviations when the window does not completely overlap with existing elements.
`'fill'`	Substitute nonexisting elements with `NaN`.
numeric or logical scalar	Substitute nonexisting elements with a specified numeric or logical value.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string`

`'SamplePoints'` — Sample points for computing standard deviations

vector

Sample points for computing standard deviations, specified as the comma-separated pair consisting of `'SamplePoints'` and a vector. The sample points represent the location of

the data in A. Sample points do not need to be uniformly sampled. By default, the sample points vector is `[1 2 3 ... ]`.

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if `t` is a vector of times corresponding to the input data, then `movstd(rand(1,10),3,'SamplePoints',t)` has a window that represents the time interval between `t(i)-1.5` and `t(i)+1.5`.

When the sample points vector has data type `datetime` or `duration`, then the moving window length must have type `duration`.

If the sample points are nonuniformly spaced and the `'Endpoints'` name-value pair is specified, then its value must be `'shrink'`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `datetime` | `duration`

Definitions

Standard Deviation

For a random variable vector A made up of N scalar observations, the standard deviation is defined as

$$S = \sqrt{\frac{1}{N-1}\sum_{i=1}^{N}|A_i - \mu|^2} \quad ,$$

where μ is the mean of A:

$$\mu = \frac{1}{N}\sum_{i=1}^{N} A_i.$$

The standard deviation is the square root of the variance. Some definitions of standard deviation use a normalization factor of N instead of N-1, which you can specify by setting `w` to `1`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'SamplePoints'` name-value pair is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`movmad` | `movmean` | `movmedian` | `movvar` | `std`

Introduced in R2016a

movsum

Moving sum

Syntax

```
M = movsum(A,k)
M = movsum(A,[kb kf])
M = movsum( ___ ,dim)
M = movsum( ___ ,nanflag)
M = movsum( ___ ,Name,Value)
```

Description

`M = movsum(A,k)` returns an array of local `k`-point sums, where each sum is calculated over a sliding window of length `k` across neighboring elements of `A`. When `k` is odd, the window is centered about the element in the current position. When `k` is even, the window is centered about the current and previous elements. The window size is automatically truncated at the endpoints when there are not enough elements to fill the window. When the window is truncated, the sum is taken over only the elements that fill the window. `M` is the same size as `A`.

- If `A` is a vector, then `movsum` operates along the length of the vector.
- If `A` is a multidimensional array, then `movsum` operates along the first array dimension whose size does not equal 1.

`M = movsum(A,[kb kf])` computes the sum with a window of length `kb+kf+1` that includes the element in the current position, `kb` elements backward, and `kf` elements forward.

`M = movsum( ___ ,dim)` returns the array of sliding sums along dimension `dim` for any of the previous syntaxes. For example, if `A` is a matrix, then `movsum(A,k,2)` operates along the columns of `A`, computing the `k`-element sliding sum for each row.

`M = movsum( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `movsum(A,k,'includenan')` includes all `NaN` values in the calculation while `movsum(A,k,'omitnan')` ignores them and computes the sum over fewer points.

`M = movsum(___,Name,Value)` specifies additional parameters for the sum using one or more name-value pair arguments. For example, if `x` is a time vector, then `movsum(A,k,'SamplePoints',x)` computes the moving sum of `A` relative to the times in `x`.

Examples

Centered Moving Sum of Vector

Compute the three-point centered moving sum of a row vector. When there are fewer than three elements in the window at the endpoints, take the sum over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movsum(A,3)
```

```
M =

    12    18    13     3    -6    -6    -1     6    12     9
```

Trailing Moving Sum of Vector

Compute the three-point trailing moving sum of a row vector. When there are fewer than three elements in the window at the endpoints, `movsum` takes the sum over the number of elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movsum(A,[2 0])
```

```
M =

     4    12    18    13     3    -6    -6    -1     6    12
```

Moving Sum of Matrix

Compute the three-point centered moving sum for each row of a matrix. The window starts on the first row, slides horizontally to the end of the row, then moves to the second

row, and so on. The dimension argument is two, which slides the window across the columns of A.

```
A = [4 8 6; -1 -2 -3; -1 3 4]
```

```
A =

     4     8     6
    -1    -2    -3
    -1     3     4
```

```
M = movsum(A,3,2)
```

```
M =

    12    18    14
    -3    -6    -5
     2     6     7
```

Moving Sum of Vector with NaN Elements

Compute the three-point centered moving sum of a row vector containing two NaN elements.

```
A = [4 8 NaN -1 -2 -3 NaN 3 4 5];
M = movsum(A,3)
```

```
M =

    12   NaN   NaN   NaN    -6   NaN   NaN   NaN    12     9
```

Recalculate the sum, but omit the NaN values. When movsum discards NaN elements, it takes the sum over the remaining elements in the window.

```
M = movsum(A,3,'omitnan')
```

```
M =

    12    12     7    -3    -6    -5     0     7    12     9
```

Sample Points for Moving Sum

Compute a 3-hour centered moving sum of the data in A according to the time vector t.

```
A = [4 8 6 -1 -2 -3];
k = hours(3);
t = datetime(16,1,1,0,0,0) + hours(0:5)
```

```
t =

  1×6 datetime array

Columns 1 through 3

   01-Jan-0016 00:00:00   01-Jan-0016 01:00:00   01-Jan-0016 02:00:00

Columns 4 through 6

   01-Jan-0016 03:00:00   01-Jan-0016 04:00:00   01-Jan-0016 05:00:00
```

```
M = movsum(A,k,'SamplePoints',t)
```

```
M =

    12    18    13     3    -6    -5
```

Return Only Full-Window Sums

Compute the three-point centered moving sum of a row vector, but discard any calculation that uses fewer than three points from the output. In other words, return only the sums computed from a full three-element window, discarding endpoint calculations.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movsum(A,3,'Endpoints','discard')
```

```
M =

    18    13     3    -6    -6    -1     6    12
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

k — Window length

numeric or duration scalar

Window length, specified as a numeric or duration scalar. When `k` is a positive integer scalar, the centered sum includes the element in the current position plus surrounding neighbors. For example, a three-point sum defined by a window of length three results in the following calculation for a vector `A`:

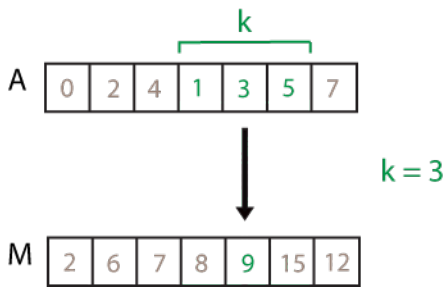

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

[kb kf] — Directional window length

numeric or duration row vector containing two elements

Directional window length, specified as a numeric or duration row vector containing two elements. When `kb` and `kf` are positive integer scalars, the calculation is over `kb+kf+1` elements. The calculation includes the element in the current position, `kb` elements before the current position, and `kf` elements after the current position. For example, a four-point sum defined by the directional window `[2 1]` results in the following calculation for a vector `A`:

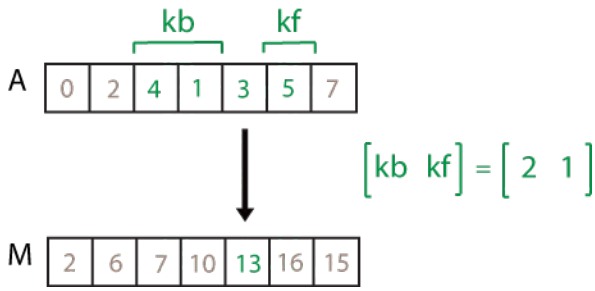

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension that `movsum` operates along, that is, the direction in which the specified window slides.

Consider a two-dimensional input array, `A`.

- If `dim = 1`, then `movsum(A,k,1)` starts with the first column and slides vertically over each row. The sum is computed over `k` elements at a time. Then it moves to the second column and repeats the computation. This process continues until all columns are exhausted.



- If `dim = 2`, then `movsum(A,k,2)` starts with the first row and slides horizontally across each column. The sum is computed over `k` elements at a time. Then it moves to the second row and repeats the computation. This process continues until all rows are exhausted.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition
`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of these values:

- `'includenan'` — Include `NaN` values when computing the sum, resulting in `NaN`.
- `'omitnan'` — Ignore all `NaN` values in the input. If a window contains only `NaN` values, then `movsum` returns 0.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `M = movsum(A,k,'Endpoints','fill')`

`'Endpoints'` — Method to treat leading and trailing windows
`'shrink'` (default) | `'discard'` | `'fill'` | numeric or logical scalar

Method to treat leading and trailing windows, specified as the comma-separated pair consisting of `'Endpoints'` and one of the following:

'Endpoints' Value	Description
'shrink'	Shrink the window size near the endpoints of the input to include only existing elements.
'discard'	Do not output any sums when the window does not completely overlap with existing elements.
'fill'	Substitute nonexisting elements with NaN.
numeric or logical scalar	Substitute nonexisting elements with a specified numeric or logical value.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string

'SamplePoints' — Sample points for computing sums

vector

Sample points for computing sums, specified as the comma-separated pair consisting of 'SamplePoints' and a vector. The sample points represent the location of the data in A. Sample points do not need to be uniformly sampled. By default, the sample points vector is [1 2 3 ...].

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if t is a vector of times corresponding to the input data, then movsum(rand(1,10),3,'SamplePoints',t) has a window that represents the time interval between t(i)-1.5 and t(i)+1.5.

When the sample points vector has data type datetime or duration, then the moving window length must have type duration.

If the sample points are nonuniformly spaced and the 'Endpoints' name-value pair is specified, then its value must be 'shrink'.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | datetime | duration

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'SamplePoints'` name-value pair is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`cumsum` | `movmax` | `movmean` | `movmin` | `movprod` | `sum`

Introduced in R2016a

movvar

Moving variance

Syntax

```
M = movvar(A,k)
M = movvar(A,[kb kf])
M = movvar( ___ ,w)
M = movvar( ___ ,w,dim)
M = movvar( ___ ,nanflag)
M = movvar( ___ ,Name,Value)
```

Description

`M = movvar(A,k)` returns an array of local `k`-point variance values, where each variance is calculated over a sliding window of length `k` across neighboring elements of `A`. When `k` is odd, the window is centered about the element in the current position. When `k` is even, the window is centered about the current and previous elements. The window size is automatically truncated at the endpoints when there are not enough elements to fill the window. When the window is truncated, the variance is taken over only the elements that fill the window. `M` is the same size as `A`.

- If `A` is a vector, then `movvar` operates along the length of the vector.
- If `A` is a multidimensional array, then `movvar` operates along the first array dimension whose size does not equal 1.

`M = movvar(A,[kb kf])` computes the variance with a window of length `kb+kf+1` that includes the element in the current position, `kb` elements backward, and `kf` elements forward.

`M = movvar( ___ ,w)` specifies a normalization factor for any of the previous syntaxes. When `w = 0` (default), `M` is normalized by `k-1` for window length `k`. When `w = 1`, `M` is normalized by `k`.

`M = movvar( ___ ,w,dim)` returns the array of sliding variances along dimension `dim` for any of the previous syntaxes. Always specify the weight `w` from the previous syntax when specifying `dim`. For example, if `A` is a matrix, then `movvar(A,k,0,2)` operates

along the columns of A, computing the k-element sliding variance for each row. The normalization factor is the default, k-1.

M = movvar(___ ,nanflag) specifies whether to include or omit NaN values from the calculation for any of the previous syntaxes. movvar(A,k,'includenan') includes all NaN values in the calculation while movvar(A,k,'omitnan') ignores them and computes the variance over fewer points.

M = movvar(___ ,Name,Value) specifies additional parameters for the variance using one or more name-value pair arguments. For example, if x is a vector of time values, then movvar(A,k,'SamplePoints',x) computes the moving variance relative to the times in x.

Examples

Centered Moving Variance of Vector

Compute the three-point centered moving variance of a row vector. When there are fewer than three elements in the window at the endpoints, take the variance over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movvar(A,3)
```

```
M =

    8.0000    4.0000   22.3333   19.0000    1.0000    1.0000    9.3333    7.0000    1.0
```

Trailing Moving Variance of Vector

Compute the three-point trailing moving variance of a row vector. When there are fewer than three elements in the window at the endpoints, take the variance over the elements that are available.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movvar(A,[2 0])
```

```
M =

         0    8.0000    4.0000   22.3333   19.0000    1.0000    1.0000    9.3333    7.0
```

Specify Normalization for Moving Variance

Compute the three-point centered moving variance of a row vector and normalize each variance by the number of elements in the window.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movvar(A,3,1)
```

```
M =

    4.0000    2.6667   14.8889   12.6667    0.6667    0.6667    6.2222    4.6667    0.6
```

Moving Variance of Matrix

Compute the three-point centered moving variance for each row of a matrix. The window starts on the first row, slides horizontally to the end of the row, then moves to the second row, and so on. The dimension argument is two, which slides the window across the columns of A. Always specify the normalization factor when specifying the dimension.

```
A = [4 8 6; -1 -2 -3; -1 3 4];
M = movvar(A,3,0,2)
```

```
M =

    8.0000    4.0000    2.0000
    0.5000    1.0000    0.5000
    8.0000    7.0000    0.5000
```

Moving Variance of Vector with NaN Elements

Compute the three-point centered moving variance of a row vector containing two NaN elements.

```
A = [4 8 NaN -1 -2 -3 NaN 3 4 5];
M = movvar(A,3)
```

```
M =

    8.0000       NaN       NaN       NaN    1.0000       NaN       NaN       NaN    1.0
```

Recalculate the variance, but omit the NaN values. When movvar discards NaN elements, it takes the variance over the remaining elements in the window.

```
M = movvar(A,3,'omitnan')
```

```
M =

    8.0000    8.0000   40.5000    0.5000    1.0000    0.5000   18.0000    0.5000    1.0
```

Sample Points for Moving Variance

Compute a 3-hour centered moving variance of the data in A according to the time vector t.

```
A = [4 8 6 -1 -2 -3];
k = hours(3);
t = datetime(2016,1,1,0,0,0) + hours(0:5)
```

```
t =

  1×6 datetime array

Columns 1 through 3

   01-Jan-2016 00:00:00   01-Jan-2016 01:00:00   01-Jan-2016 02:00:00

Columns 4 through 6

   01-Jan-2016 03:00:00   01-Jan-2016 04:00:00   01-Jan-2016 05:00:00
```

```
M = movvar(A,k,'SamplePoints',t)
```

```
M =

    8.0000    4.0000   22.3333   19.0000    1.0000    0.5000
```

Return Only Full-Window Variances

Compute the three-point centered moving variance of a row vector, but discard any calculation that uses fewer than three points from the output. In other words, return

only the variances computed from a full three-element window, discarding endpoint calculations.

```
A = [4 8 6 -1 -2 -3 -1 3 4 5];
M = movvar(A,3,'Endpoints','discard')
```

```
M =

    4.0000   22.3333   19.0000    1.0000    1.0000    9.3333    7.0000    1.0000
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `logical`

k — Window length

numeric or duration scalar

Window length, specified as a numeric or duration scalar. When `k` is a positive integer scalar, the centered variance includes the element in the current position plus surrounding neighbors. For example, a three-point variance defined by a window of length three results in the following calculation for a vector `A`:



Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`[kb kf]` — Directional window length

numeric or duration row vector containing two elements

Directional window length, specified as a numeric or duration row vector containing two elements. When `kb` and `kf` are positive integer scalars, the calculation is over `kb+kf+1` elements. The calculation includes the element in the current position, `kb` elements before the current position, and `kf` elements after the current position. For example, a four-point variance defined by the directional window `[2 1]` results in the following calculation for a vector `A`:

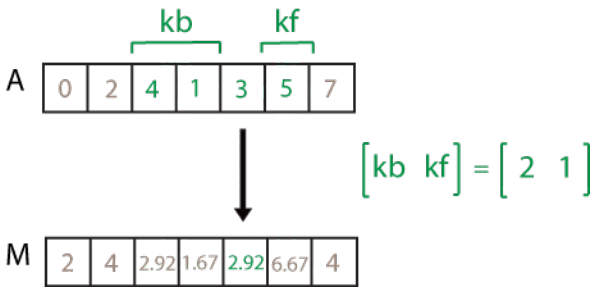

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`w` — Weight

`0` (default) | `1`

Weight, specified as one of these values:

- `0` — Normalize by `k-1`, where `k` is the window length. If `k=1`, the weight is `k`.
- `1` — Normalize by `k`.

Data Types: `single` | `double`

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension `dim` indicates the dimension that `movvar` operates along, that is, the direction in which the specified window slides.

Consider a two-dimensional input array, `A`.

- If `dim = 1`, then `movvar(A,k,0,1)` starts with the first column and slides vertically over each row. The variance is computed over `k` elements at a time. Then it moves to the second column and repeats the computation. This process continues until all columns are exhausted. The argument `0` specifies the default weight, which is required when specifying `dim`.



movvar(A,k,0,1)

- If `dim = 2`, then `movvar(A,k,0,2)` starts with the first row and slides horizontally across each column. The variance is computed over `k` elements at a time. Then it moves to the second row and repeats the computation. This process continues until all rows are exhausted. The argument `0` specifies the default weight, which is required when specifying `dim`.



movvar(A,k,0,2)

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition

`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of these values:

- `'includenan'` — Include `NaN` values from the input when computing the variance, resulting in the output `NaN`.

- `'omitnan'` — Ignore all `NaN` values in the input. If a window contains only `NaN` values, then `movvar` returns `NaN`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `M = movvar(A,k,'Endpoints','fill')`

`'Endpoints'` — Method to treat leading and trailing windows

`'shrink'` (default) | `'discard'` | `'fill'` | numeric or logical scalar

Method to treat leading and trailing windows, specified as the comma-separated pair consisting of `'Endpoints'` and one of the following:

`'Endpoints'` Value	Description
`'shrink'`	Shrink the window size near the endpoints of the input to include only existing elements.
`'discard'`	Do not output any variances when the window does not completely overlap with existing elements.
`'fill'`	Substitute nonexisting elements with `NaN`.
numeric or logical scalar	Substitute nonexisting elements with a specified numeric or logical value.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string`

`'SamplePoints'` — Sample points for computing variances

vector

Sample points for computing variances, specified as the comma-separated pair consisting of `'SamplePoints'` and a vector. The sample points represent the location of the data in `A`. Sample points do not need to be uniformly sampled. By default, the sample points vector is `[1 2 3 ... ]`.

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if `t` is a vector of times corresponding to the input

data, then `movvar(rand(1,10),3,'SamplePoints',t)` has a window that represents the time interval between `t(i)-1.5` and `t(i)+1.5`.

When the sample points vector has data type `datetime` or `duration`, then the moving window length must have type `duration`.

If the sample points are nonuniformly spaced and the `'Endpoints'` name-value pair is specified, then its value must be `'shrink'`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `datetime` | `duration`

Definitions

Variance

For a random variable vector A made up of N scalar observations, the variance is defined as

$$V = \frac{1}{N-1}\sum_{i=1}^{N}|A_i - \mu|^2$$

where μ is the mean of A,

$$\mu = \frac{1}{N}\sum_{i=1}^{N}A_i.$$

Some definitions of variance use a normalization factor of N instead of $N-1$. You can specify a factor of N by setting `w` to `1`. In either case, the mean is assumed to have the usual normalization factor N.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

The `'SamplePoints'` name-value pair is not supported.

For more information, see “Tall Arrays”.

See Also

See Also

`movmad` | `movmean` | `movmedian` | `movstd` | `var`

Introduced in R2016a

mpower, ^

Matrix power

Syntax

```
C = A^B
C = mpower(A,B)
```

Description

`C = A^B` computes `A` to the `B` power and returns the result in `C`.

`C = mpower(A,B)` is an alternate way to execute `A^B`, but is rarely used. It enables operator overloading for classes.

Examples

Square a Matrix

Create a 2-by-2 matrix and square it.

```
A = [1 2; 3 4];
C = A^2
```

```
C =

     7    10
    15    22
```

The syntax `A^2` is equivalent to `A*A`.

Matrix Exponents

Create a 2-by-2 matrix and use it as the exponent for a scalar.

```
B = [0 1; 1 0];
C = 2^B
```

```
C =

    1.2500    0.7500
    0.7500    1.2500
```

Compute C by first finding the eigenvalues D and eigenvectors V of the matrix B.

```
[V,D] = eig(B)
```

```
V =

   -0.7071    0.7071
    0.7071    0.7071


D =

    -1     0
     0     1
```

Next, use the formula 2^B = V*2^D/V to compute the power.

```
C = V*2^D/V
```

```
C =

    1.2500    0.7500
    0.7500    1.2500
```

Input Arguments

A — Base

scalar | matrix

Base, specified as a scalar or matrix. Inputs A and B must be one of the following:

- Base A is a square matrix and exponent B is a scalar. If B is a positive integer, the power is computed by repeated squaring. For other values of B the calculation involves eigenvalues and eigenvectors.

- Base A is a scalar and exponent B is a square matrix. The calculation uses eigenvalues and eigenvectors.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

B — Exponent
scalar | matrix

Exponent, specified as a scalar or matrix. Inputs A and B must be one of the following:

- Base A is a square matrix and exponent B is a scalar. If B is a positive integer, the power is computed by repeated squaring. For other values of B the calculation involves eigenvalues and eigenvectors.
- Base A is a scalar and exponent B is a square matrix. The calculation uses eigenvalues and eigenvectors.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

Tips

- MATLAB computes `X^(-1)` and `inv(X)` in the same manner, and both are subject to the same limitations. For more information, see `inv`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If A is a 2-by-2 or larger matrix and B is `Inf` or `-Inf`, then `mpower(A,B)` returns a matrix of NaNs.

See Also

See Also

`mtimes` | `power` | `times`

Topics

"Array vs. Matrix Operations"
"Operator Precedence"
"MATLAB Operators and Special Characters"

Introduced before R2006a

mput

Class: FTP

Upload file or folder to FTP server

Syntax

```
mput(ftpobj,contents)
paths = mput(ftpobj,contents)
```

Description

`mput(ftpobj,contents)` uploads the file or folder specified by `contents` to the current folder on an FTP server.

`paths = mput(ftpobj,contents)` returns a cell array that lists the paths to the uploaded files on the server.

Input Arguments

ftpobj

FTP object created by ftp.

contents

Character vector enclosed in single quotation marks that specifies either a file name or a folder name. Can include a wildcard character (`*`).

Output Arguments

paths

Cell array that includes the paths to the uploaded files on the server.

Examples

Suppose that your current MATLAB folder contains files `myfile1.m` through `myfile10.m`, and that you want to upload to a hypothetical FTP server, `ftp.testsite.com`. Connect to the server and upload the files:

```
ts = ftp('ftp.testsite.com');
mput(ts,'myfile*.m');
close(ts);
```

See Also

mkdir | mget | ftp | rename

Introduced before R2006a

msgbox

Create message dialog box

Syntax

```
h = msgbox(Message)
h = msgbox(Message,Title)
h = msgbox(Message,Title,Icon)
h = msgbox(Message,Title,'custom',IconData,IconCMap)
h = msgbox( ___ ,CreateMode)
```

Description

`h = msgbox(Message)` creates a message dialog box that automatically wraps `Message` to fit an appropriately sized figure.

`h = msgbox(Message,Title)` specifies the title of the message box.

`h = msgbox(Message,Title,Icon)` specifies which built-in icon to display in the message dialog box.

`h = msgbox(Message,Title,'custom',IconData,IconCMap)` specifies a custom icon to include in the message dialog box. `IconData` is the image data that defines the icon. `IconCMap` is the colormap used for the image. If IconData is a true-color image, you do not need to specify an IconCMap.

`h = msgbox( ___ ,CreateMode)` specifies whether the message box is modal. Additionally, you can specify a TeX interpreter for `Message` and `Title`.

Examples

Simple Message Dialog Box

Specify the text you want displayed in the message dialog box.

```
h = msgbox('Operation Completed');
```

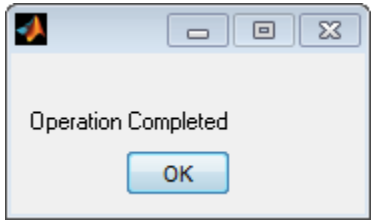

Message Dialog Box Text with Line Breaks

Specify the message dialog box text using a cell array of character vectors separated by newline characters.

```
h = msgbox({'Operation' 'Completed'});
```



Message Dialog Box with a Title

Specify the message dialog box text and give the dialog box a title, `Success`.

```
h = msgbox('Operation Completed','Success');
```

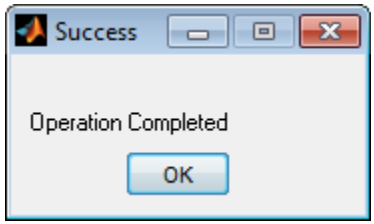

Message Dialog Box That Uses a Built-in Icon

Include a built-in error icon with an error message in a message dialog box entitled Error.

```
h = msgbox('Invalid Value', 'Error','error');
```

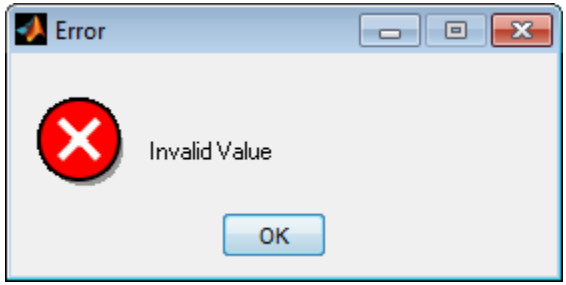

Message Dialog Box That Uses a Truecolor Custom Icon

Read an RGB image into the workspace. Then, specify it as a custom icon in the dialog box.

```
myicon = imread('landOcean.jpg');
h=msgbox('Operation Completed','Success','custom',myicon);
```

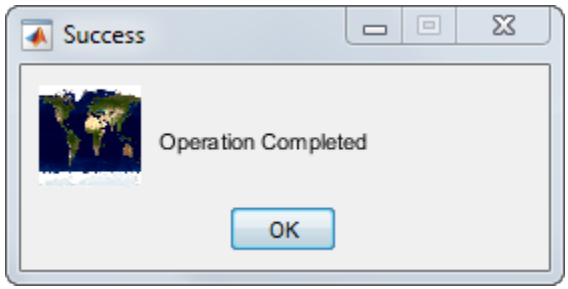

Message Dialog Box That Uses an Indexed Color Icon

Read the image data and colormap into the workspace.

```
[cdata,map] = imread('trees.tif');
```

Create the message dialog box, including the custom icon.

```
h=msgbox('Operation Completed',...
         'Success','custom',cdata,map);
```

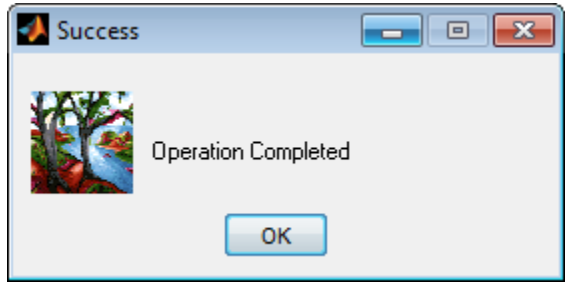

Adjust the image colors by specifying a different colormap. For instance, specify the MATLAB built-in colormap, `summer`

```
h=msgbox('Operation Completed','Success','custom',...
          cdata,summer);
```

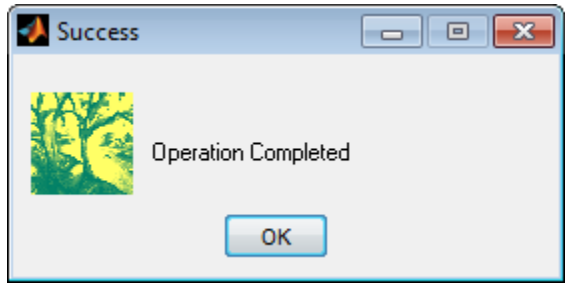

Modal Message Dialog Box

Create a modal message dialog box, wrapping the call to `msgbox` with `uiwait` to make the message dialog box block MATLAB execution until the user responds to the message dialog box.

```
uiwait(msgbox('Operation Completed','Success','modal'));
```



Modal Message Dialog Box That Uses a TeX Formatted Message

Create a structure to specify that the user must click OK before interacting with another window and that MATLAB interpret the message text as TeX format.

```
CreateStruct.Interpreter = 'tex';
CreateStruct.WindowStyle = 'modal';
```

Create the message dialog box.

```
h=msgbox('Z = X^2 + Y^2','Value',CreateStruct);
```

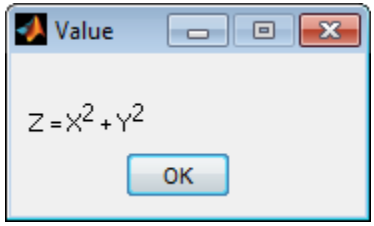

Input Arguments

`Message` — Dialog box text

character vector | character array | cell array of character vectors

Dialog box text, specified as a character vector, character array, or cell array of character vectors.

Example: `'Operation Completed'`

Example: `['Operation ', 'Completed']`

Example: `{'Operation', 'Completed'}`

`Title` — Dialog box title

character vector

Dialog box title specified as a character vector.

Example: `'Success'`

`Icon` — Icon to include in dialog box

`'none'` (default) | `'error'` | `'help'` | `'warn'` | `'custom'`

Icon to include in dialog box, specified as `'error'`, `'help'`, `'warn'`, or `'custom'`.

Built-in icons appear as follows:

- Error
- Help
- Warn

`IconData` — Image data defining a custom icon

matrix

Image data defining a custom icon specified as a matrix. Each element of the matrix specifies the color of a rectangular segment in the image. Use `imread` to get the `IconData` value for an image that you want to use as a message dialog box icon.

Example: [1:64]'*[1:64])/64

`IconCMap` — Colormap for a custom icon that is not true-color

m–by–3 matrix | built-in colormap

Colormap for a custom icon that is not true-color, specified as an m-by-3 matrix of real numbers between `0.0` and `1.0`, or as a MATLAB built-in colormap. Use `imread` to get the `IconCMap` value for an image that you want to use as a message dialog box icon.

Example: [0.5 0.5 0.5]

Example: hot(64)

`CreateMode` — Message dialog box mode

`'nonmodal'` (default) | `'modal'` | `'replace'` | structure array

Mode in which message dialog box is created, specified as `'nonmodal'`, `'modal'`, `'replace'`, or a structure array.

- If `CreateMode` is a structure array, it can have the fields `WindowStyle` and `Interpreter`. The `WindowStyle` field must be one of the values listed in the list items that follow this one. The `Interpreter` field must be `'tex'` or `'none'`. If the `Interpreter` value is `'tex'`, MATLAB interprets the `Message` and `Title` values as TeX. The default value for `Interpreter` is `'none'`.
- If `CreateMode` is `'nonmodal'`, MATLAB creates a new nonmodal message box with the specified parameters. Existing message boxes with the same `Title` remain.
- If `CreateMode` is `'modal'`, MATLAB replaces the existing message box with the specified `Title` that was last created or clicked on with the specified modal dialog box. MATLAB deletes all other message boxes with the same title. The replaced message box can be either modal or nonmodal.
- If `CreateMode` is `'replace'`, MATLAB replaces the message box having the specified `Title` that was last created or clicked on with a nonmodal message box as specified. MATLAB deletes all other message boxes with the same title. The replaced message box can be either modal or nonmodal.

Example: CreateStruct.Interpreter='tex';

Output Arguments

h — Message dialog box handle

scalar

Message dialog box handle returned as a scalar. This is a unique identifier, which you can use to query and modify the properties of a specific message dialog box.

Definitions

modal dialog box

A modal dialog box prevents a user from interacting with other windows before responding to the modal dialog box.

For more information about modal dialog boxes, see `WindowStyle` in the Figure Properties topic.

Tips

- Program execution continues even when a modal dialog box is active. To block MATLAB program execution until the user responds to the modal dialog box, use the `uiwait` function.
- Modal dialogs (created using `errordlg`, `msgbox`, or `warndlg`) replace any existing dialogs created with these functions that also have the same name.

See Also

See Also

`errordlg` | `helpdlg` | `imread` | `warndlg`

Introduced before R2006a

mtimes, *

Matrix Multiplication

Syntax

```
C = A*B
C = mtimes(A,B)
```

Description

`C = A*B` is the matrix product of `A` and `B`. If `A` is an m-by-p and `B` is a p-by-n matrix, then `C` is an m-by-n matrix defined by

$$C(i,j) = \sum_{k=1}^{p} A(i,k)B(k,j).$$

This definition says that `C(i,j)` is the inner product of the `i`th row of `A` with the `j`th column of `B`. You can write this definition using the MATLAB colon operator as

```
C(i,j) = A(i,:)*B(:,j)
```

For nonscalar `A` and `B`, the number of columns of `A` must equal the number of rows of `B`. Matrix multiplication is *not* universally commutative for nonscalar inputs. That is, `A*B` is typically not equal to `B*A`. If at least one input is scalar, then `A*B` is equivalent to `A.*B` and is commutative.

`C = mtimes(A,B)` is an alternative way to execute `A*B`, but is rarely used. It enables operator overloading for classes.

Examples

Multiply Two Vectors

Create a 1-by-4 row vector, `A`, and a 4-by-1 column vector, `B`.

```
A = [1 1 0 0];
B = [1; 2; 3; 4];
```

Multiply A times B.

```
C = A*B
```

```
C = 3
```

The result is a 1-by-1 scalar, also called the *dot product* or *inner product* of the vectors A and B. Alternatively, you can calculate the dot product $A \cdot B$ with the syntax `dot(A,B)`.

Multiply B times A.

```
C = B*A
```

```
C =

     1     1     0     0
     2     2     0     0
     3     3     0     0
     4     4     0     0
```

The result is a 4-by-4 matrix, also called the *outer product* of the vectors A and B. The outer product of two vectors, $A \otimes B$, returns a matrix.

Multiply Two Arrays

Create two arrays, A and B.

```
A = [1 3 5; 2 4 7];
B = [-5 8 11; 3 9 21; 4 0 8];
```

Calculate the product of A and B.

```
C = A*B
```

```
C =

    24    35   114
    30    52   162
```

Calculate the inner product of the second row of A and the third column of B.

```
A(2,:)*B(:,3)
```

```
ans = 162
```

This answer is the same as C(2,3).

Input Arguments

A — Left Array

scalar | vector | matrix

Left Array, specified as a scalar, vector, or matrix. For nonscalar inputs, the number of columns in A must be equal to the number of rows in B.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | duration | calendarDuration
Complex Number Support: Yes

B — Right Array

scalar | vector | matrix

Right Array, specified as a scalar, vector, or matrix. For nonscalar inputs, the number of columns in A must be equal to the number of rows in B.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | duration | calendarDuration
Complex Number Support: Yes

Output Arguments

C — Product Array

scalar | vector | matrix

Product Array, returned as a scalar, vector, or matrix. Array C has the same number of rows as input A and the same number of columns as input B. For example, if A is an m-by-0 empty matrix and B is a 0-by-n empty matrix, then A*B is an m-by-n matrix of zeros.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- For `A*B`, only `A` or `B` can be a tall array. If `B` is a tall array, then `A` must be a scalar. If `A` is a tall array, then `B` must have the same number of rows as `A` has columns.
- For `A'*B`, both `A` and `B` must be tall vectors or matrices with a common size in the first dimension.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Multiplication of pure imaginary numbers by non-finite numbers might not match MATLAB. The code generator does not specialize multiplication by pure imaginary numbers—it does not eliminate calculations with the zero real part. For example, `(Inf + 1i)*1i = (Inf*0 – 1*1) + (Inf*1 + 1*0)i = NaN + Infi`.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`colon` | `cross` | `dot` | `times`

Topics

"Array vs. Matrix Operations"

"Operator Precedence"
"MATLAB Operators and Special Characters"

Introduced before R2006a

mu2lin

Convert mu-law audio signal to linear

Syntax

```
y = mu2lin(mu)
```

Description

`y = mu2lin(mu)` converts mu-law encoded 8-bit audio signals, stored as “flints” in the range $0 \le$ `mu` ≤ 255, to linear signal amplitude in the range `-s < Y < s` where `s = 32124/32768 ~= .9803`. The input `mu` is often obtained using `fread(...,'uchar')` to read byte-encoded audio files. "Flints" are MATLAB integers — floating-point numbers whose values are integers.

See Also

`audioread` | `lin2mu`

Introduced before R2006a

multibandread

Read band-interleaved data from binary file

Syntax

```
X = multibandread(filename, size, precision, offset, interleave,
byteorder)
X = multibandread(...,subset1,subset2,subset3)
```

Description

`X = multibandread(filename, size, precision, offset, interleave, byteorder)` reads band-sequential (BSQ), band-interleaved-by-line (BIL), or band-interleaved-by-pixel (BIP) data from the binary file `filename`. The `filename` input is specified as a character vector. This function defines *band* as the third dimension in a 3-D array, as shown in this figure.

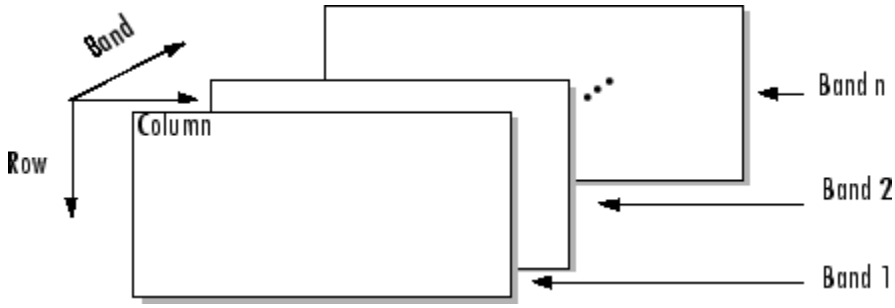

You can use the parameters to `multibandread` to specify many aspects of the read operation, such as which bands to read. See "Parameters" on page 1-7629 for more information.

`X` is a 2-D array if only one band is read; otherwise it is 3-D. `X` is returned as an array of data type `double` by default. Use the `precision` parameter to map the data to a different data type.

`X = multibandread(...,subset1,subset2,subset3)` reads a subset of the data in the file. You can use up to three subsetting parameters to specify the data subset along row, column, and band dimensions. See "Subsetting Parameters" on page 1-7630 for more information.

Note: In addition to BSQ, BIL, and BIP files, multiband imagery may be stored using the TIFF file format. In that case, use the `imread` function to import the data.

Parameters

This table describes the arguments accepted by `multibandread`.

Argument	Description
`filename`	Character vector containing the name of the file to be read.
`size`	Three-element vector of integers consisting of `[height, width, N]`, where • `height` is the total number of rows • `width` is the total number of elements in each row • `N` is the total number of bands. This will be the dimensions of the data if it is read in its entirety.
`precision`	Character vector specifying the format of the data to be read, such as `'uint8'`, `'double'`, `'integer*4'`, or any of the other precisions supported by the `fread` function. Note: You can also use the `precision` parameter to specify the format of the output data. For example, to read `uint8` data and output a `uint8` array, specify a precision of `'uint8=>uint8'` (or `'*uint8'`). To read `uint8` data and output it in the MATLAB software in single precision, specify `'uint8=>single'`. See `fread` for more information.
`offset`	Scalar specifying the zero-based location of the first data element in the file. This value represents the number of bytes from the beginning of the file to where the data begins.

Argument	Description
`interleave`	Character vector specifying the format in which the data is stored • `'bsq'` — Band-Sequential • `'bil'` — Band-Interleaved-by-Line • `'bip'` — Band-Interleaved-by-Pixel For more information about these interleave methods, see the `multibandwrite` reference page.
`byteorder`	Character vector specifying the byte ordering (machine format) in which the data is stored, such as • `'ieee-le'` — Little-endian • `'ieee-be'` — Big-endian See `fopen` for a complete list of supported formats.

Subsetting Parameters

You can specify up to three subsetting parameters. Each subsetting parameter is a three-element cell array, `{`*`dim`*`,`*`method`*`,index}`, where

Parameter	Description
`dim`	The dimension to subset along. Specified as any of these values: • `'Column'` • `'Row'` • `'Band'`
`method`	The subsetting method. Specified as either of these values: • `'Direct'` • `'Range'` If you leave out this element of the subset cell array, `multibandread` uses `'Direct'` as the default.

Parameter	Description
`index`	If `method` is `'Direct'`, `index` is a vector specifying the indices to read along the Band dimension. If `method` is `'Range'`, `index` is a three-element vector of `[start, increment, stop]` specifying the range and step size to read along the dimension specified in `dim`. If `index` is a two-element vector, `multibandread` assumes that the value of `increment` is `1`.

Examples

Example 1

Setup initial parameters for a data set.

```
rows=3; cols=3; bands=5;
filename = tempname;
```

Define the data set.

```
fid = fopen(filename, 'w', 'ieee-le');
fwrite(fid, 1:rows*cols*bands, 'double');
fclose(fid);
```

Read every other band of the data using the Band-Sequential format.

```
im1 = multibandread(filename, [rows cols bands], ...
                    'double', 0, 'bsq', 'ieee-le', ...
                    {'Band', 'Range', [1 2 bands]} )
```

Read the first two rows and columns of data using Band-Interleaved-by-Pixel format.

```
im2 = multibandread(filename, [rows cols bands], ...
                    'double', 0, 'bip', 'ieee-le', ...
                    {'Row', 'Range', [1 2]}, ...
                    {'Column', 'Range', [1 2]} )
```

Read the data using Band-Interleaved-by-Line format.

```
im3 = multibandread(filename, [rows cols bands], ...
```

```
                    'double', 0, 'bil', 'ieee-le')
```

Delete the file created in this example.

```
delete(filename);
```

Example 2

Read `int16` BIL data from the FITS file `tst0012.fits`, starting at byte 74880.

```
im4 = multibandread('tst0012.fits', [31 73 5], ...
                    'int16', 74880, 'bil', 'ieee-be', ...
                    {'Band', 'Range', [1 3]} );
im5 = double(im4)/max(max(max(im4)));
imagesc(im5);
```

See Also

`fread` | `fwrite` | `imread` | `memmapfile` | `multibandwrite`

Introduced before R2006a

multibandwrite

Write band-interleaved data to file

Syntax

```
multibandwrite(data,filename,interleave)
multibandwrite(data,filename,interleave,start,totalsize)
multibandwrite(...,param,value...)
```

Description

`multibandwrite(data,filename,interleave)` writes `data`, a two- or three-dimensional numeric or logical array, to the binary file specified by `filename`. The `filename` is specified as a character vector. The length of the third dimension of `data` determines the number of bands written to the file. The bands are written to the file in the form specified by `interleave`. See "Interleave Methods" on page 1-7634 for more information about this argument.

If filename already exists, `multibandwrite` overwrites it unless you specify the optional `offset` parameter. See the last alternate syntax for `multibandwrite` for information about other optional parameters.

`multibandwrite(data,filename,interleave,start,totalsize)` writes `data` to the binary file `filename` in chunks. In this syntax, `data` is a subset of the complete data set.

`start` is a 1-by-3 array `[firstrow firstcolumn firstband]` that specifies the location to start writing data. `firstrow` and `firstcolumn` specify the location of the upper left image pixel. `firstband` gives the index of the first band to write. For example, `data(I,J,K)` contains the data for the pixel at `[firstrow+I-1, firstcolumn+J-1]` in the `(firstband+K-1)`-th band.

`totalsize` is a 1-by-3 array, `[totalrows,totalcolumns,totalbands]`, which specifies the full, three-dimensional size of the data to be written to the file.

Note In this syntax, you must call `multibandwrite` multiple times to write all the data to the file. The first time it is called, `multibandwrite` writes the complete file,

using the fill value for all values outside the data subset. In each subsequent call, `multibandwrite` overwrites these fill values with the data subset in `data`. The parameters `filename`, `interleave`, `offset`, and `totalsize` must remain constant throughout the writing of the file.

`multibandwrite(...,param,value...)` writes the multiband data to a file, specifying any of these optional parameter/value pairs.

Parameter	Description
`'precision'`	Character vector specifying the form and size of each element written to the file. See the help for `fwrite` for a list of valid values. The default precision is the class of the data.
`'offset'`	The number of bytes to skip before the first data element. If the file does not already exist, `multibandwrite` writes ASCII null values to fill the space. To specify a different fill value, use the parameter `'fillvalue'`. This option is useful when you are writing a header to the file before or after writing the data. When writing the header to the file after the data is written, open the file with `fopen` using `'r+'` permission.
`'machfmt'`	Character vector to control the format in which the data is written to the file. Typical values are `'ieee-le'` for little endian and `'ieee-be'` for big endian. See the help for `fopen` for a complete list of available formats. The default machine format is the local machine format.
`'fillvalue'`	A number specifying the value to use in place of missing data. `'fillvalue'` can be a single number, specifying the fill value for all missing data, or a 1-by-Number-of-bands vector of numbers specifying the fill value for each band. This value is used to fill space when data is written in chunks.

Interleave Methods

`interleave` is a character vector that specifies how `multibandwrite` interleaves the bands as it writes data to the file. If `data` is two-dimensional, `multibandwrite` ignores

the `interleave` argument. The following table lists the supported methods and uses this example multiband file to illustrate each method.

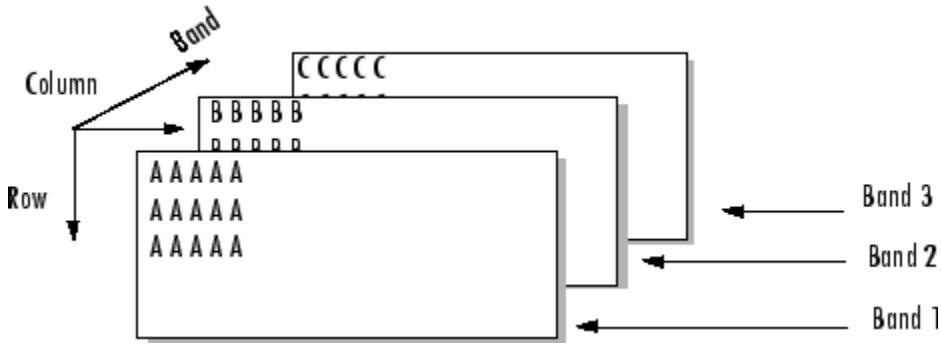

Supported methods of interleaving bands include those listed below.

Method	Specified as	Description	Example
Band-Interleaved-by-Line	`'bil'`	Write an entire row from each band	AAAAABBBBBCCCCC AAAAABBBBBCCCCC AAAAABBBBBCCCCC
Band-Interleaved-by-Pixel	`'bip'`	Write a pixel from each band	ABCABCABCABCABC...
Band-Sequential	`'bsq'`	Write each band in its entirety	AAAAA AAAAA AAAAA BBBBB BBBBB BBBBB CCCCC CCCCC CCCCC

Examples

Note To run these examples successfully, you must be in a writable directory.

Example 1

Write all data (interleaved by line) to the file in one call.

```
data = reshape(uint16(1:600), [10 20 3]);
multibandwrite(data,'data.bil','bil');
```

Example 2

Write a single-band tiled image with one call for each tile. This is only useful if a subset of each band is available at each call to `multibandwrite`.

```
numBands = 1;
dataDims = [1024 1024 numBands];
data = reshape(uint32(1:(1024 * 1024 * numBands)), dataDims);

for band = 1:numBands
   for row = 1:2
      for col = 1:2

         subsetRows = ((row - 1) * 512 + 1):(row * 512);
         subsetCols = ((col - 1) * 512 + 1):(col * 512);

         upperLeft = [subsetRows(1), subsetCols(1), band];
         multibandwrite(data(subsetRows, subsetCols, band), ...
                        'banddata.bsq', 'bsq', upperLeft, dataDims);

      end
   end
end
```

See Also

`multibandread` | `fwrite` | `fread`

Introduced before R2006a

munlock

Allow clearing functions from memory

Syntax

```
munlock
munlock fun
munlock('fun')
```

Description

`munlock` unlocks the currently running `.m` or `.mex` function in memory so that subsequent `clear` functions can remove it.

`munlock fun` unlocks the `.m` or `.mex` file named `fun` from memory. By default, these files are unlocked so that changes to the file are picked up. Calls to munlock are needed only to unlock `.m` or `.mex` functions that have been locked with `mlock`.

`munlock('fun')` is the function form of `munlock`.

Examples

The function `testfun` begins with an `mlock` statement.

```
function testfun
mlock
  .
  .
```

When you execute this function, it becomes locked in memory. You can check this using the `mislocked` function.

```
testfun

mislocked testfun
ans =
```

```
     1
```

Using `munlock`, you unlock the `testfun` function in memory. Checking its status with `mislocked` shows that it is indeed unlocked at this point.

```
munlock testfun

mislocked testfun
ans =
     0
```

See Also

`mlock` | `mislocked` | `inmem` | `persistent`

Introduced before R2006a

mustBePositive

Validate that value is positive or issue error

Syntax

```
mustBePositive(A)
```

Description

`mustBePositive(A)` issues an error if `A` is not positive. Values are positive when they are real, numeric, and greater than zero. This function does not return a value.

`mustBePositive` accepts user-defined objects if the class of the object implements these methods:

- `gt`
- `isreal`
- `isnumeric` or `islogical`

Examples

Validate That Values Are Positive

Use `mustBePositive` to validate that the input contains only positive values.

The `rand` function creates a uniformly distributed random number.

```
A = rand(1,5) -0.5;
```

Validate that array elements are positive.

```
mustBePositive(A)
```

```
Error using mustBePositive (line 14)
Value must be positive.
```

The result of subtracting `0.5` from the array return by `rand` can contain negative numbers. When a value is negative, `mustBePositive` issues an error.

Constrain Property to Positive Values

This class constrains the value of `Prop1` to positive values.

```
classdef MyClass
   properties
      Prop1 {mustBePositive}
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = 0;
```

```
Error setting property 'Prop1' of class 'MyClass':
Value must be positive.
```

When you assign a value to the property, MATLAB calls `mustBePositive` with the value being assigned to the property. `mustBePositive` issues an error because the value `0` is not positive.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical` or numeric class
- MATLAB classes that implement `gt`, `isreal`, and either `isnumeric` or `islogical`

See Also

See Also

`mustBeNonnegative` | `mustBeNonzero`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeNonpositive

Validate that value is nonpositive or issue error

Syntax

```
mustBeNonpositive(A)
```

Description

`mustBeNonpositive(A)` issues an error if `A` is positive. Values are positive when they are greater than zero. This function does not return a value.

`mustBeNonpositive` accepts user-defined objects if the class of the object implements these methods:

- `le`
- `isreal`
- `isnumeric` or `islogical`

Examples

Validate That Values Are Not Positive

Use `mustBeNonpositive` to validate that the input contains only nonpositive values.

```
A = 1 < 10;
mustBeNonpositive(A)
```

```
Error using mustBeNonpositive (line 14)
Value must not be positive.
```

Because the expression `1 < 10` returns logical `1`, the value of `A` is positive and causes `mustBeNonpositive` to issue an error.

Constrain Property to Nonpositive Values

This class constrains the value of `Prop1` to a nonpositive values.

```
classdef MyClass
   properties
      Prop1 {mustBeNonpositive}
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = 10;
```

```
Error setting property 'Prop1' of class 'MyClass':
Value must not be positive.
```

When you assign a value to the property, MATLAB calls `mustBeNonpositive` with the value being assigned to the property. `mustBeNonpositive` issues an error because the value `10` is positive.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical` or numeric class
- MATLAB classes that implement `le`, `isreal`, and either `isnumeric` or `islogical`

Example: `A = -1` does not generate an error.

See Also

See Also

`mustBeNegative` | `mustBeNonzero`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeFinite

Validate that value is finite or issue error

Syntax

```
mustBeFinite(A)
```

Description

`mustBeFinite(A)` issues an error if `A` is not finite. A value is finite if it is not `NaN` or `Inf`. This function does not return a value.

This function accepts user-defined objects if the class of the object implements the following method:

- `isfinite`

Examples

Validate That Values Are Not NaN or Inf

Use `mustBeFinite` to validate that no array elements are `NaN` or `Inf`.

```
d = 0:9;
A = 1./d;
mustBeFinite(A)
```

```
Error using mustBeFinite (line 13)
Value must be finite.
```

The division by `d` resulted in one element becoming `Inf`, which causes an error.

Constrain Property to Finite Values

This class constrains the value of `Prop1` to finite values.

```
classdef MyClass
```

```
   properties
      Prop1 {mustBeFinite}
   end
end
```

Create an object and assign a value to its property.

```
d = 0:9;
obj = MyClass;
obj.Prop1 = 1./d;
```

```
Error setting property 'Prop1' of class 'MyClass':
Value must be finite.
```

When you assign a value to the property, MATLAB calls `mustBeFinite` with the value being assigned to the property. `mustBeFinite` issues an error because the result of division by `0` is `Inf`.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical` or numeric class
- MATLAB classes that implement `isfinite`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

See Also

See Also

`mustBeNonNan` | `mustBeReal`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeNonNan

Validate that value is nonNaN

Syntax

```
mustBeNonNan(A)
```

Description

`mustBeNonNan(A)` issues an error if `A` is `NaN`. This function does not return a value.

`mustBeNonNan` accepts user-defined objects if the class of the object implements this method:

- `isnan`

Examples

Validate That Values Are Not NaN

Use `mustBeNonNan` to validate that no array elements are `NaN`.

```
A = 0./[-2 -1 0 1 2];
mustBeNonNan(A)
```

```
Error using mustBeNonNan (line 13)
Value must not be NaN.
```

Division of `0` by `0` is equal to `NaN` so the array value contains one element that is `NaN`, which causes an error.

Constrain Property to NonNan Values

This class constrains the value of `Prop1` to nonNaN values.

```
classdef MyClass
   properties
      Prop1 {mustBeNonNan}
```

```
    end
end
```

Create an object and assign a value to `Prop1`.

```
obj = MyClass;
obj.Prop1 = 0./[-2 -1 0 1 2];
```

```
Error setting property 'Prop1' of class 'MyClass':
Value must not be NaN.
```

When you assign a value to the property, MATLAB calls `mustBeNonNan` with the value being assigned to the property. `mustBeNonNan` issues an error because division of `0` by `0` is `NaN`.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- All MATLAB numeric classes and `logical`.
- MATLAB user-defined classes that implement `isnan`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

See Also

See Also

`mustBeFinite` | `mustBeNonempty`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeNonnegative

Validate that value is nonnegative or issue error

Syntax

```
mustBeNonnegative(A)
```

Description

`mustBeNonnegative(A)` issues an error if `A` is negative. This function does not return a value.

`mustBeNonnegative` accepts user-defined objects if the class of the object implements these methods:

- `ge`
- `isreal`
- `isnumeric` or `islogical`

Examples

Validate That Values Are Not Negative

Use `mustBeNonnegative` to validate that the input contains only nonnegative values.

The `randn` function creates normally distributed random numbers.

```
A = randn(1,5);
```

Validate that the random numbers are nonnegative.

```
mustBeNonnegative(A)
```

```
Error using mustBeNonnegative (line 14)
Value must be nonnegative.
```

Constrain Property to Nonnegative Values

This class constrains the value of `Prop1` to nonnegative values.

```
classdef MyClass
   properties
      Prop1 {mustBeNonnegative}
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = -10;
```

```
Error using mustBeNonnegative (line 14)
Value must be nonnegative.
```

When you assign a value to the property, MATLAB calls `mustBeNonnegative` with the value being assigned to the property. `mustBeNonnegative` issues an error because the value `-10` is negative.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical` or numeric class
- MATLAB classes that implement `ge`, `isreal`, and either `isnumeric` or `islogical`

Example: `A = 1` does not generate an error.

See Also

See Also

`mustBeNonzero` | `mustBePositive`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeGreaterThan

Validate that value is greater than another value or issue error

Syntax

```
mustBeGreaterThan(A,B)
```

Description

`mustBeGreaterThan(A,B)` issues an error if all elements in `A` are not greater than the scalar `B`. This function does not return a value.

`mustBeGreaterThan` accepts user-defined objects if the class of the object implements these methods:

- `gt`
- `isreal`
- `isnumeric` or `islogical`

Examples

Validate First Input Greater Than Second

Use `mustBeGreaterThan` to validate that the values in the first input are greater than the value of the second input.

```
mustBeGreaterThan([2 3 4],2)
```

```
Error using mustBeGreaterThan (line 19)
Value must be greater than 2.
```

Constrain Property Values to Be Greater Than Specified Value.

This class constrains the value of `Prop1` to be greater than `2`.

```
classdef MyClass
   properties
```

```
      Prop1 {mustBeGreaterThan(Prop1,2)}
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
Obj.Prop1 = 2;
```

```
Error setting property 'Prop1' of class 'MyClass':
Value must be greater than 2.
```

When you assign a value to the property, MATLAB calls `mustBeGreaterThan` with the value being assigned to the property. `mustBeGreaterThan` issues an error because the value `2` is not greater than `2`.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical`, `char`, `string`, or numeric class
- MATLAB classes that implement `gt`, `isreal`, and either `isnumeric`, or `islogical`

B — Value that A must be greater than

scalar

Value that `A` must be greater than, specified as a scalar of one of the following:

- `logical`, `char`, `string`, and numeric class
- MATLAB classes that implement `gt`, `isreal`, and either `isnumeric`, or `islogical`

See Also

See Also

`mustBeGreaterThanOrEqual` | `mustBeLessThan`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeGreaterThanOrEqual

Validate that value is greater than or equal to another value or issue error

Syntax

```
mustBeGreaterThanOrEqual(A,B)
```

Description

`mustBeGreaterThanOrEqual(A,B)` issues an error if all elements in `A` are not greater than or equal to the scalar `B`. This function does not return a value.

`mustBeGreaterThanOrEqual` accepts user-defined objects if the class of the object implements these methods:

- `ge`
- `isreal`
- `isnumeric` or `islogical`

Examples

Validate That Input Is Greater Than Specified Value

Use `mustBeGreaterThanOrEqual` to validate that the values in the array are greater than or equal to `3`.

```
mustBeGreaterThanOrEqual([2,3,4],3)
```

```
Error using mustBeGreaterThanOrEqual (line 19)
Value must be greater than or equal to 3.
```

Constrain Property Values

Constrain property values to be greater than or equal to a specified value.

This class constrains the value of `Prop1` to be greater than or equal to `3`.

```
classdef MyClass
   properties
      Prop1 {mustBeGreaterThanOrEqual(Prop1,3)}
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = 2;
```

```
Error setting property 'Prop1' of class 'MyClass':
Value must be greater than or equal to 3.
```

When you assign a value to the property, MATLAB calls `mustBeGreaterThanOrEqual` with the value being assigned to the property. `mustBeGreaterThanOrEqual` issues an error because the value `2` is not greater than or equal to `3`.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical`, `char`, `string`, and numeric class
- MATLAB classes that implement `ge`, `isreal`, and either `isnumeric` or `islogical`

B — Value that A must be greater than or equal to

scalar

Value that `A` must be greater than or equal to, specified as a scalar of one of the following:

- Any numeric class
- Logical class
- MATLAB classes that implement `ge`, `isreal`, and either `isnumeric` or `islogical`

See Also

See Also

`mustBeGreaterThan` | `mustBeLessThanOrEqual`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeLessThan

Validate that value is less than another value or issue error

Syntax

```
mustBeLessThan(A,B)
```

Description

`mustBeLessThan(A,B)` issues an error if all elements in `A` are not less than the scalar `B`. This function does not return a value.

`mustBeLessThan` accepts user-defined objects if the class of the object implements these methods:

- `lt`
- `isscalar`
- `isreal`
- `isnumeric` or `islogical`

Examples

Validate First Input Less Than Second

Use `mustBeLessThan` to validate that the values in the first input are less than the value of the second input.

```
mustBeLessThan([2 3 4],2)
```

```
Error using mustBeLessThan (line 19)
Value must be less than 2.
```

Property Value Less Than Specified Value

Constrain property values to be less than a specified value.

This class constrains the value of `Prop1` to be less than `2`.

```
classdef MyClass
   properties
      Prop1 {mustBeLessThan(Prop1,2)}
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = 2;
```

```
Error setting property 'Prop1' of class 'MyClass':
Value must be less than 2.
```

When you assign a value to the property, MATLAB calls `mustBeLessThan` with the value being assigned to the property. `mustBeLessThan` issues an error because the value `2` is not less than `2`.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical`, `char`, `string`, or numeric class
- MATLAB classes that implement `lt`, `isscalar`, `isreal`, and either `isnumeric` or `islogical`

When using `mustBeLessThan` as a property validator, this argument must be the property name, specified without quotation marks.

B — Value that A must be less than

scalar

Value that `A` must be less than, specified as a scalar of one of the following:

- Any numeric class

- Logical class
- MATLAB classes that implement `lt`, `isscalar`, `isreal`, and either `isnumeric` or `islogical`

See Also

See Also

`mustBeGreaterThan` | `mustBeLessThanOrEqual`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeLessThanOrEqual

Validate that value is less than or equal to another value or issue error

Syntax

```
mustBeLessThanOrEqual(A,B)
```

Description

`mustBeLessThanOrEqual(A,B)` issues an error if all elements in `A` are not less than or equal to the scalar `B`. This function does not return a value.

`mustBeLessThanOrEqual` accepts user-defined objects if the class of the object implements these methods:

- `le`
- `isscalar`
- `isreal`
- `isnumeric` or `islogical`

Examples

Validate First Input Less Than or Equal to Second

Use `mustBeLessThanOrEqual` to validate that the values in the first input are less than or equal to the value of the second input.

```
mustBeLessThanOrEqual([3 4 5],2)
```

```
Error using mustBeLessThanOrEqual (line 18)
Values must be less than or equal to 2.
```

Property Value Less Than or Equal to Specified Value

Constrain property values to be less than or equal to a specified value.

This class constrains the value of `Prop1` to be less than or equal to `2`.

```
classdef MyClass
   properties
      Prop1 {mustBeLessThanOrEqual(Prop1,2)}
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = 3;
```

```
Error setting 'Prop1' property of 'MyClass' class:
Values must be less than or equal to 2.
```

When you assign a value to the property, MATLAB calls `mustBeLessThanOrEqual` with the value being assigned to the property. `mustBeLessThanOrEqual` issues an error because the value `3` is not less than or equal to `2`.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical`, `char`, or numeric classes
- MATLAB classes that implement `le`, `isscalar`, `isreal`, and either `isnumeric` or `islogical`

B — Value that A must be less than or equal to

scalar

Value that `A` must be less than or equal to, specified as a scalar of one of the following:

- `logical`, `char`, `string`, and numeric class
- MATLAB classes that implement `le`, `isscalar`, `isreal`, and either `isnumeric` or `islogical`

See Also

See Also

`mustBeGreaterThanOrEqual` | `mustBeLessThan`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeNegative

Validate that value is negative or issue error

Syntax

```
mustBeNegative(A)
```

Description

`mustBeNegative(A)` issues an error if `A` is not negative. A value is negative if it is less than zero. This function does not return a value.

`mustBeNegative` accepts user-defined objects if the class of the object implements these methods:

- `lt`
- `isreal`
- `isnumeric` or `islogical`

Examples

Validate That Values Are Negative

Use `mustBeNegative` to validate that the input contains only negative values.

The `rand` function creates uniformly distributed random numbers in the interval `(0,1)`. Test the array after the subtraction to validate that all values are negative. If not, `mustBeNegative` issues an error.

```
A = rand(1,5) - 0.75;
mustBeNegative(A)
```

```
Error using mustBeNegative (line 14)
Value must be negative.
```

Constrain Property to Negative Values

This class constrains the value of `Prop1` to negative values.

```
classdef MyClass
   properties
      Prop1 {mustBeNegative}
   end
end
```

Create an object and assign a value to `Prop1`.

```
obj = MyClass;
obj.Prop1 = rand(1,5) - 0.75;
```

```
Error setting property 'Prop1' of class 'MyClass':
Value must be negative.
```

When you assign a value to the property, MATLAB calls `mustBeNegative` with the value being assigned to the property. `mustBeNegative` issues an error if the any of the elements in the array are not negative.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical` or numeric class
- MATLAB classes that implement `lt`, `isreal`, and either `isnumeric` or `islogical`

See Also

See Also

`mustBeNonnegative`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeNonempty

Validate that value is nonempty or issue error

Syntax

```
mustBeNonempty(A)
```

Description

`mustBeNonempty(A)` issues an error if `A` is empty. This function does not return a value.

`mustBeNonempty` accepts user-defined objects if the class of the object implements this method:

- `isempty`

Examples

Validate Input Not Empty

Use `mustBeNonempty` to validate that the input is not empty.

Create a containers.Map.

```
A = containers.Map;
```

Validate that `A` is not an empty value.

```
mustBeNonempty(A)
```

```
Error using mustBeNonempty (line 13)
Values must not be empty.
```

Creating a `containers.Map` with no input arguments results in an empty object.

Constrain Property to Nonempty Values

This class constrains the value of `Prop1` to nonempty values. The default value must also be nonempty.

```
classdef MyClass
   properties
      Prop1 {mustBeNonempty} = containers.Map(1,'First')
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = containers.Map;
```

```
Error setting 'Prop1' property of 'MyClass' class:
Values must not be empty.
```

When you assign a value to the property, MATLAB calls `mustBeNonempty` with the value being assigned to the property. `mustBeNonempty` issues an error because the value assigned to `Prop1` is empty.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or array of any one of the following:

- Any MATLAB data type
- MATLAB classes that implement `isempty`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `struct` | `table` | `cell` | `function_handle` | `categorical` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

See Also

See Also

`mustBeMember` | `mustBeNonzero`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeNonsparse

Validate that value is nonsparse or issue error

Syntax

```
mustBeNonsparse(A)
```

Description

`mustBeNonsparse(A)` issues an error if `A` is sparse. This function does not return a value.

`mustBeNonsparse` accepts user-defined objects if the class of the object implements this method:

- `issparse`

Examples

Validate Input Is Not Sparse

Use `mustBeNonsparse` to validate that the input is nonsparse.

Use the `sparse` function to create a sparse matrix.

```
A = [ 0   0   0   5
      0   2   0   0
      1   3   0   0
      0   0   4   0];
S = sparse(A);
```

Validate that `S` is nonsparse.

```
mustBeNonsparse(S)
```

```
Error using mustBeNonsparse (line 13)
```

```
Values must not be sparse.
```

Constrain Property to Nonsparse Values

This class constrains the value of `Prop1` to nonsparse values.

```
classdef MyClass
   properties
      Prop1 {mustBeNonsparse}
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
A = [ 0   0   0   5
      0   2   0   0
      1   3   0   0
      0   0   4   0];
obj.Prop1 = sparse(A);
```

```
Error setting 'Prop1' property of 'MyClass' class:
Values must not be sparse.
```

When you assign a value to the property, MATLAB calls `mustBeNonsparse` with the value being assigned to the property. `mustBeNonsparse` issues an error because the value assigned to `Prop1` is sparse.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or array of any one of the following:

- `logical` or numeric class
- MATLAB classes that implement `issparse`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`

Complex Number Support: Yes

See Also

See Also

`mustBeNonempty` | `mustBeNumeric`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeNonzero

Validate that value is nonzero or issue error

Syntax

```
mustBeNonzero(A)
```

Description

`mustBeNonzero(A)` issues an error if `A` is zero. This function does not return a value.

`mustBeNonzero` accepts user-defined objects if the class of the object implements these methods:

- `eq`
- `isnumeric` or `islogical`

Examples

Validate That Values Are Not Zero

Use `mustBeNonzero` to validate that the input does not contain values that are zero.

`A` is an array of numbers that is the result of a calculation:

```
A = sin([-1,0,1]);
msutBeNonzero(A)
```

```
Error using mustBeNonzero (line 14)
Value must not be zero.
```

Constrain Property to Nonzero Values

This class constrains the value of `Prop1` to be nonzero.

```
classdef MyClass
   properties
```

```
        Prop1 {mustBeNonzero}
    end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = sin([-1,0,1]);
```

```
Error setting property 'Prop1' of class 'MyClass':
Value must not be zero.
```

When you assign a value to the property, MATLAB calls `mustBeNonzero` with the value being assigned to the property. `mustBeNonzero` issues an error because the one of the values in `A` is zero.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical` or numeric class
- MATLAB classes that implement `eq`, and either `isnumeric` or `islogical`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

See Also

See Also

`mustBeNonnegative` | `mustBePositive`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeNumeric

Validate that value is numeric or issue error

Syntax

```
mustBeNumeric(A)
```

Description

`mustBeNumeric(A)` issues an error if `A` is not numeric. This function does not return a value.

`mustBeNumeric` accepts user-defined objects if the class of the object implements this method:

- `isnumeric`

Examples

Validate That Input Is Numeric

Validate that the result of an operation is numeric.

```
mustBeNumeric(5 < 10)
```

```
Error using mustBeNumeric (line 10)
Values must be numeric.
```

The relational operator for less than returns a logical value.

Constrain Property to Numeric Values

This class constrains the value of `Prop1` to numeric values.

```
classdef MyClass
   properties
      Prop1 {mustBeNumeric}
   end
```

```
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = isprime(29);
```

```
Error setting 'Prop1' property of 'MyClass' class:
Values must be numeric.
```

When you assign a value to the property, MATLAB calls `mustBeNumeric` with the value being assigned to the property. `mustBeNumeric` issues an error because the value assigned to `Prop1` is a logical.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or array of any of the following:

- Any MATLAB numeric class
- MATLAB classes that implement `isnumeric`

Other data types cause an error.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`
Complex Number Support: Yes

See Also

See Also

`mustBeNumericOrLogical`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeNumericOrLogical

Validate that value is numeric or logical or issue error

Syntax

```
mustBeNumericOrLogical(A)
```

Description

`mustBeNumericOrLogical(A)` issues an error if `A` is not numeric or logical. This function does not return a value.

`mustBeNumericOrLogical` accepts user-defined objects if the class of the object implements these methods:

- `isnumeric` or `islogical`

Examples

Validate That Input Is Numeric or Logical

Validate that the value of an object property is a numeric or logical value.

```
a = axes;
mustBeNumericOrLogical(a.Visible)
```

```
Error using mustBeNumericOrLogical (line 11)
Values must be numeric or logical.
```

In this case, the value of the `Visible` property is a `char` vector, which results in an error.

Constrain Property to Numeric or Logical Values

This class constrains the value of `Prop1` to numeric values.

```
classdef MyClass
   properties
```

```
      Prop1 {mustBeNumericOrLogical}
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = get(gca,'Visible');
```

```
Error setting 'Prop1' property of 'MyClass' class:
Values must be numeric or logical.
```

When you assign a value to the property, MATLAB calls `mustBeNumericOrLogical` with the value being assigned to the property. `mustBeNumericOrLogical` issues an error because the value assigned to `Prop1` is a `char` vector.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or array of any one of the following:

- `logical` or numeric class
- MATLAB classes that implement `isnumeric` or `islogical`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`
Complex Number Support: Yes

See Also

See Also

`mustBeNumeric`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeReal

Validate that value is real or issue error

Syntax

```
mustBeReal(A)
```

Description

`mustBeReal(A)` issues an error if `A` is not a real number. This function does not return a value.

`mustBeReal` accepts user-defined objects if the class of the object implements this method:

- `isreal`

Examples

Validate Input Is Real

Use `mustBeReal` to validate that the input is a real number.

Validate that a calculation results in real numbers.

```
x = -2:2;
z = x.^exp(-x.^2);
mustBeReal(z)
```

```
Error using mustBeReal (line 13)
values must be real.
```

The value `z` is complex.

Constrain Property to Real Values

This class constrains the value of `Prop1` to real values.

```
classdef MyClass
```

```
   properties
      Prop1 {mustBeReal}
   end
end
```

Create an object and assign a value to its property.

```
x = -2:0.1:2;
obj = MyClass;
obj.Prop1 = x.^exp(-x.^2);
```

```
Error setting 'Prop1' property of 'MyClass' class:
values must be real.
```

When you assign a value to the property, MATLAB calls `mustBeReal` with the value being assigned to the property. `mustBeReal` issues an error because the value assigned to `Prop1` is complex.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or array of any one of the following:

- `logical`, `char`, or numeric class
- MATLAB classes that implement `isreal`

Other data types cause an error.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

See Also

See Also

`mustBeFinite` | `mustBeNonNan`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeInteger

Validate that value is integer or issue error

Syntax

```
mustBeInteger(A)
```

Description

`mustBeInteger(A)` issues an error if `A` does not contain integer values. `mustBeInteger` does not return a value.

This function accepts user-defined objects if the class of the object implements these methods:

- `isreal`
- `isfinite`
- `floor`
- `eq`
- `isnumeric` or `islogical`

Examples

Validate That Input Contains Only Integers

Validate that a calculation results in integer values.

```
A = randi(9)/randi(9);
mustBeInteger(A)
```

```
Error using mustBeInteger (line 14)
Values must be integer.
```

If the result using random numbers is not an integer value, `mustBeInteger` issues an error.

Constrain Property to Integer Values

Constrain the property values to be only integers.

```
classdef MyClass
   properties
      Prop1 {mustBeInteger}
   end
end
```

Create an object and assign a value to its property.

```
obj = MyClass;
obj.Prop1 = randi(9)/randi(9);
```

```
Error setting 'Prop1' property of 'MyClass' class:
Value must be integer.
```

When you assign a value to the property, MATLAB calls `mustBeInteger` with the value being assigned to the property. `mustBeInteger` issues an error because the value resulting from the division of these particular random integers did not result in an integer.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or array of any of the following:

- `logical`, `char`, or numeric class
- MATLAB classes that implement `eq`, `isreal`, `isfinite`, `floor`, and either `isnumeric` or `islogical`

Other data types cause an error.

See Also

See Also

`mustBeNumeric` | `mustBePositive`

Topics

"Property Validation Functions"

Introduced in R2017a

mustBeMember

Validate that value is member of specified set

Syntax

```
mustBeMember(A,B)
```

Description

`mustBeMember(A,B)` issues an error if `A` is not a member of the set of values specified by `B`. The set of values specified by `A` must be a case-sensitive, exact match. `mustBeMember` does not return a value.

When using `mustBeMember` as a property validation function, ensure that the property default value is a member of the set.

This function accepts user-defined objects if the class of the object implements the following method:

- `ismember`

Examples

Validate That First Input Is Member of Set

Use `mustBeMember` to validate that the first input is a member of the set of values specified by the second input.

Validate that the character vector `'red'` is a member of set of character vectors, `'yellow'`, `'green'`, and `'blue'`.

```
A = 'red';
B = {'yellow','green','blue'};
mustBeMember(A,B)
```

```
Error using mustBeMember (line 14)
```

```
Value must be a member of this set
    'yellow'
    'green'
    'blue'
```

The validation failed because `'red'` is not a member of the set. MATLAB returns an error message listing the allowed values.

Constrain Property Value to Specified Set

Constrain property values to a specific set of values.

This class constrains the value of `Prop1` to be either `'yellow'`, `'green'`, or `'blue'`.

```
classdef MyClass
   properties
      Prop1 {mustBeMember(Prop1,{'yellow','green','blue'})} = 'yellow'
   end
end
```

The default property value must comply with the restrictions imposed by the validator. Therefore, you must explicitly assign a default value that is a member of the set.

Create an object and assign a value to its property.

```
obj = MyClass
obj.Prop1 = 'red';
```

```
Error setting 'Prop1' property of 'MyClass' class:
Value must be a member of this set
    'yellow'
    'green'
    'blue'
```

The validation failed because `'red'` is not a member of the set. MATLAB returns an error message listing the allowed values.

- "Property Validation Functions"

Input Arguments

A — Value to validate

scalar | array

Value to validate, specified as a scalar or an array of one of the following:

- `logical`, `string`, `char`, or any numeric class
- Logical array, string array, `cellstr`, or numeric array
- MATLAB classes that implement `ismember`

When using `mustBeMember` as a property validator, this argument must be the property name, specified without quotation marks.

Example: `PropName {mustBeMember(PropName,{'High','Medium','Low'})} = 'Low'`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string`
Complex Number Support: Yes

B — Set of values to which A must belong
scalar | array

Set of values to which A must belong, specified as any of the following:

- `logical`, `string`, `char`, or any numeric class
- Logical array, string array, `cellstr`, or numeric array
- MATLAB classes that implement `ismember`

Example: Property with cell array of `char` vectors: `PropName {mustBeMember(PropName,{'yellow','green','blue'})} = 'blue'`

Example: Property with string array: `PropName {mustBeMember(PropName, ["yellow","green","blue"])} = "blue"`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string`
Complex Number Support: Yes

See Also

See Also

`mustBeNonempty`

Topics

"Property Validation Functions"

Introduced in R2017a

namelengthmax

Maximum identifier length

Syntax

```
l = namelengthmax
```

Description

`l = namelengthmax` returns the maximum length allowed for MATLAB identifiers. MATLAB identifiers include:

- Variable names
- Structure field names
- Script, function, and class names
- Model names

Use the `namelengthmax` function instead of hard-coding a specific maximum name length into your programs. Then, if the identifier length changes in a future MATLAB release, it is not necessary to update this limit in your code.

Examples

Determine Maximum MATLAB Identifier Length

```
l = namelengthmax
```

```
l = 63
```

See Also

See Also

`isvarname` | `matlab.lang.makeUniqueStrings` | `matlab.lang.makeValidName`

Introduced before R2006a

NaN

Not-a-Number

Syntax

```
NaN
N = NaN(n)
N = NaN(sz1,...,szN)
N = NaN(sz)

N = NaN(classname)
N = NaN(n,classname)
N = NaN(sz1,...szN,classname)
N = NaN(sz,classname)

N = NaN('like',p)
N = NaN(n,'like',p)
N = NaN(sz1,...szN,'like',p)
N = NaN(sz,'like',p)
```

Description

`NaN` returns the IEEE arithmetic representation for Not-a-Number (`NaN`). These values result from operations which have undefined numerical results.

`N = NaN(n)` is an `n`-by-`n` matrix of `NaN` values.

`N = NaN(sz1,...,szN)` is a `sz1`-by-...-by-`szN` array of `NaN` values where `sz1,...,szN` indicates the size of each dimension. For example, `NaN(3,4)` returns a 3-by-4 array of `NaN` values.

`N = NaN(sz)` is an array of `NaN` values where the size vector, `sz`, defines `size(N)`. For example, `NaN([3,4])` returns a 3-by-4 array of `NaN` values.

Note The size inputs `sz1,...,szN`, as well as the elements of the size vector `sz`, should be nonnegative integers. Negative integers are treated as 0.

`N = NaN(classname)` returns a `NaN` value where the string, `classname`, specifies the data type. `classname` can be either `'single'` or `'double'`.

`N = NaN(n,classname)` returns an `n`-by-`n` array of `NaN` values of data type `classname`.

`N = NaN(sz1,...szN,classname)` returns a `sz1`-by-...-by-`szN` array of `NaN` values of data type `classname`.

`N = NaN(sz,classname)` returns an array of `NaN` values where the size vector, `sz`, defines `size(N)` and `classname` defines `class(N)`.

`N = NaN('like',p)` returns a `NaN` value of the same data type, sparsity, and complexity (real or complex) as the numeric variable, `p`.

`N = NaN(n,'like',p)` returns an `n`-by-`n` array of `NaN` values like `p`.

`N = NaN(sz1,...szN,'like',p)` returns a `sz1`-by-...-by-`szN` array of `NaN` values like `p`.

`N = NaN(sz,'like',p)` returns an array of `NaN` values like `p` where the size vector, `sz`, defines `size(N)`.

Examples

These operations produce `NaN`:

- Any arithmetic operation on a `NaN`, such as `sqrt(NaN)`
- Addition or subtraction, such as magnitude subtraction of infinities as `(+Inf)+(-Inf)`
- Multiplication, such as `0*Inf`
- Division, such as `0/0` and `Inf/Inf`
- Remainder, such as `rem(x,y)` where `y` is zero or `x` is infinity

Tips

Because two `NaN`s are not equal to each other, logical operations involving `NaN`s always return false, except ~= (not equal). Consequently,

```
NaN ~= NaN
ans =
     1
NaN == NaN
ans =
     0
```

and the NaNs in a vector are treated as different unique elements.

```
unique([1 1 NaN NaN])
ans =
     1 NaN NaN
```

Use the `isnan` function to detect NaNs in an array.

```
isnan([1 1 NaN NaN])
ans =
     0     0     1     1
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Dimensions must be real, nonnegative, integers.

See Also

See Also

`inf` | `isfinite` | `isfloat` | `isnan`

Topics

"Class Support for Array-Creation Functions"

Introduced before R2006a

nargchk

Validate number of input arguments

Compatibility

`nargchk` is not recommended. Use `narginchk` instead.

Syntax

```
msgText = nargchk(minArgs,maxArgs,numArgs)
msgStruct = nargchk(minArgs,maxArgs,numArgs,'struct')
```

Description

`msgText = nargchk(minArgs,maxArgs,numArgs)` validates the number of input arguments, and returns a message if the number of inputs, `numArgs`, is less than `minArgs` or greater than `maxArgs`.

This syntax is the same as `msgtext = nargchk(minArgs,maxArgs,numArgs,'string')`.

`msgStruct = nargchk(minArgs,maxArgs,numArgs,'struct')` returns a message structure instead of a character vector.

Examples

Check Number of Function Inputs

In a file in your current working folder, create a `checkInputs` function.

```
function checkInputs(varargin)
    msgTxt = nargchk(2,3,nargin)
end
```

At the command prompt, call the `checkInputs` function with an accepted number of inputs. `nargchk` returns an empty character vector.

```
checkInputs(13,7)
```

```
msgTxt =

     []
```

Call the `checkInputs` function with too few inputs.

```
checkInputs(42)
```

```
msgTxt =

    'Not enough input arguments.'
```

Call the `checkInputs` function with too many inputs.

```
checkInputs(0,1,1,2,3)
```

```
msgTxt =

    'Too many input arguments.'
```

Pass `nargchk` Output Structure to `error` Function

In a file in your current working folder, create a `checkInputs` function.

```
function checkInputs(varargin)
    msgStruct = nargchk(2,3,nargin,'struct');
    error(msgStruct)
end
```

At the command prompt, call the `checkInputs` function with an accepted number of inputs. `nargchk` does not throw an error.

```
checkInputs(13,7)
```

Call the `checkInputs` function with too few inputs.

```
checkInputs(42)
```

```
Error using checkInputs (line 3)
Not enough input arguments.
```

Call the `checkInputs` function with too many inputs.

```
checkInputs(0,1,1,2,3)
```

```
Error using checkInputs (line 3)
Too many input arguments.
```

- "Validate Number of Function Arguments"

Input Arguments

`minArgs` — Minimum number accepted inputs

scalar numeric value

Minimum number accepted of inputs, specified as a scalar numeric value.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`maxArgs` — Maximum number accepted inputs

scalar numeric value

Maximum number accepted of inputs, specified as a scalar numeric value.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`numArgs` — Number of function inputs

scalar numeric value

Number of function inputs, specified as a scalar numeric value. Typically, you use the `nargin` function to determine the number of input arguments specified in the function call.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`msgText` — Message text

`'Not enough input arguments.'` | `'Too many input arguments.'` | empty matrix

Message text, returned as `'Not enough input arguments.'`, `'Too many input arguments.'`, or an empty matrix.

If numArgs is less than minArgs, nargchk returns a character vector with the value 'Not enough input arguments.'. If numArgs is greater than maxArgs, nargchk returns a character value with the value 'Too many input arguments.'. Otherwise, nargchk returns an empty matrix.

msgStruct — Message and identifier
structure

Message and identifier, returned as a structure with message and identifier fields. If numArgs is less than minArgs, nargchk returns the following structure.

```
       message: 'Not enough input arguments.'
    identifier: 'MATLAB:nargchk:notEnoughInputs'
```

If numArgs is greater than maxArgs, nargchk returns the following structure.

```
       message: 'Too many input arguments.'
    identifier: 'MATLAB:nargchk:tooManyInputs'
```

Otherwise, nargchk returns an empty structure.

Tips

- nargchk is often used with the error function. The error function accepts either type of return value from nargchk: a message character vector or message structure. For example, this command uses the output message structure from nargchk as the input to the error function.

  ```
  error(nargchk(2,4,nargin,'struct'))
  ```

  If the number of input arguments is within the expected range, nargchk returns an empty character vector or structure. When the error function receives an empty character vector or structure, it does not throw an error.

See Also

See Also

error | nargin | narginchk | nargout | nargoutchk | varargin | varargout

Topics

"Validate Number of Function Arguments"

Introduced before R2006a

nargin

Number of function input arguments

Syntax

```
nargin
nargin(fun)
```

Description

`nargin` returns the number of function input arguments given in the call to the currently executing function. Use this syntax in the body of a function only.

`nargin(fun)` returns the number of input arguments that appear in the `fun` function definition. If the function includes `varargin` in its definition, then `nargin` returns the negative of the number of inputs. For example, if function `myFun` declares inputs `a`, `b`, and `varargin`, then `nargin('myFun')` returns `-3`.

Examples

Inputs to Current Function

Create a function in a file named `addme.m` that accepts up to two inputs, and identify the number of inputs with `nargin`.

```
function c = addme(a,b)

switch nargin
    case 2
        c = a + b;
    case 1
        c = a + a;
    otherwise
        c = 0;
end
```

At the command prompt, call the `addme` function with two inputs.

```
c = addme(13,42)
```

```
c =

    55
```

Call the function with one input.

```
c = addme(13)
```

```
c =

    26
```

Inputs Defined for a Function

Determine how many inputs a function accepts.

The function `addme` created in the previous example has two inputs in its declaration statement (`a` and `b`).

```
fun = 'addme';
nargin(fun)
```

```
ans =
     2
```

Function with `varargin` Input

Determine how many inputs a function that uses `varargin` can accept.

Define a function in a file named `mynewplot.m` that accepts numeric inputs `x` and `y` and any number of additional plot inputs using `varargin`.

```
function mynewplot(x,y,varargin)
   figure
   plot(x,y,varargin{:})
   title('My New Plot')
end
```

At the command line, query how many inputs `newplot` can accept.

```
fx = 'mynewplot';
nargin(fx)
```

```
ans =
```

```
-3
```

The minus sign indicates that the third input is `varargin`. The `mynewplot` function can accept an indeterminate number of additional input arguments.

- "Find Number of Function Arguments"

Input Arguments

`fun` — Function to return number of input arguments
function handle | character vector

Function to return number of input arguments from its definition, specified as a function handle or a character vector.

Example: `@cos`

Example: `'plot'`

Data Types: `char` | `function_handle`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- For the syntax `nargin(fun)`, if `fun` is a function handle or a function name that C/C++ code generation does not support, then the generated code for `nargin` returns 0.

See Also

See Also

`narginchk` | `nargout` | `varargin`

Topics

"Find Number of Function Arguments"
"Argument Checking in Nested Functions"

Introduced before R2006a

narginchk

Validate number of input arguments

Syntax

```
narginchk(minArgs,maxArgs)
```

Description

`narginchk(minArgs,maxArgs)` validates the number of input arguments. `narginchk` throws an error if the number of inputs specified in the call to the currently executing function is less than `minArgs` or greater than `maxArgs`. If the number of inputs is between `minArgs` and `maxArgs` (inclusive), `narginchk` does nothing.

Examples

Number of Inputs Within Expected Range

Verify that a function is called with a minimum of two and maximum of five input arguments.

In a file, `checkInputs.m`, in your current working folder, create the following function. The function signature indicates that `checkInputs` requires two input arguments and accepts additional, optional arguments.

```
function checkInputs(A,B,varargin)
minArgs=2;
maxArgs=5;
narginchk(minArgs,maxArgs)

disp("Received 2 required and " + length(varargin) + " optional inputs")
end
```

At the command prompt, call the function with one input argument.

```
checkInputs(13)
```

```
Error using checkInputs (line 4)
Not enough input arguments.
```

Call the function again with five input arguments.

```
checkInputs(13,7,42,1701,5)
```

```
Received 2 required and 3 optional inputs
```

Call the function again with six input arguments.

```
checkInputs(13,7,42,1701,5,88)
```

```
Error using checkInputs (line 4)
Too many input arguments.
```

- "Validate Number of Function Arguments"

Input Arguments

`minArgs` — Minimum number accepted inputs

scalar numeric value

Minimum number accepted of inputs, specified as a scalar numeric value.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`maxArgs` — Maximum number accepted inputs

scalar numeric value

Maximum number accepted of inputs, specified as a scalar numeric value.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Tips

- To verify that there are a minimum number of arguments, with no maximum number, specify `inf` as `maxArgs`. For example: `narginchk(5,inf)` throws an error when there are not at least five inputs.

- To verify that there is an exact number of arguments, specify the same value for `minArgs` and `maxArgs` For example: `narginchk(3,3)` throws an error when there are not exactly three inputs.
- If you call a function with too few inputs, the message identifier and message are:

  ```
  identifier: 'MATLAB:narginchk:notEnoughInputs'
     message: 'Not enough input arguments.'
  ```

  When too many inputs are supplied, the message identifier and message are:

  ```
  identifier: 'MATLAB:narginchk:tooManyInputs'
     message: 'Too many input arguments.'
  ```
- If `minArgs` is 0 and `maxArgs` is `nargin(fun)`, you do not need to use `narginchk`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`nargin` | `varargin`

Topics

"Validate Number of Function Arguments"

Introduced in R2011b

nargout

Number of function output arguments

Syntax

```
nargout
nargout(fun)
```

Description

`nargout` returns the number of function output arguments specified in the call to the currently executing function. Use this syntax in the body of a function only.

`nargout(fun)` returns the number of outputs that appear in the `fun` function definition. If the function includes `varargout` in its definition, then `nargout` returns the negative of the number of outputs. For example, if function `myFun` declares outputs `y`, `z`, and `varargout`, then `nargout('myFun')` returns `-3`.

Examples

Outputs for Current Function

Create a function in a file named `subtract.m` that calculates a second return value, `absdif`, only if requested.

```
function [dif,absdif] = subtract(y,x)
dif = y-x;
if nargout > 1
    disp('Calculating absolute value')
    absdif = abs(dif);
end
end
```

At the command prompt, call the `subtract` function with one return value.

```
diff = subtract(42,13)
```

```
diff =

    29
```

Call the `subtract` function again with two return values.

```
[dif,absdif] = subtract(2,5)
```

```
Calculating absolute value

dif =

    -3


absdif =

     3
```

Outputs Defined for a Function

Determine how many outputs a function can return.

The function `subtract` created in the previous example has two outputs in its declaration statement (`dif` and `absdif`).

```
fun = @subtract;
nargout(fun)
```

```
ans =
     2
```

Function with `varargout` Output

Determine how many outputs a function that uses `varargout` can return.

Define a function in a file named `mySize.m` that returns a vector of dimensions from the `size` function and the individual dimensions using `varargout`.

```
function [sizeVector,varargout] = mySize(x)
   sizeVector = size(x);
   varargout = cell(1,nargout-1);
```

```
    for k = 1:length(varargout)
        varargout{k} = sizeVector(k);
    end
end
```

At the command line, query how many outputs `mySize` can return.

```
fun = 'mySize';
nargout(fun)
```

```
ans =
    -2
```

The minus sign indicates that the second output is `varargout`. The `mySize` function can return an indeterminate number of additional outputs.

- "Find Number of Function Arguments"

Input Arguments

`fun` — Function to return number of output arguments

function handle | character vector

Function to return number of output arguments from its definition, specified as a function handle or a character vector.

Example: `@rand`

Example: `'sortrows'`

Data Types: `char` | `function_handle`

Tips

- When you use a function as part of an expression, such as an `if` statement, MATLAB calls the function with one output argument. Therefore, the `nargout` function returns `1` within expressions.
- If `nargout == 0` and you specify the value of the output, MATLAB populates `ans`. However, if you check `nargout` and do not specify a value for the output, MATLAB does not modify `ans`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- For the syntax `nargout`, if the function that contains the `nargout` call has at least one output argument and you call the function without a terminating semicolon, then the generated code for `nargout` returns 1.

  This behavior does not occur for extrinsic functions.
- For the syntax `nargout(fun)`, if `fun` is a function handle or function name that C/C++ code generation does not support, then the generated code for `nargout` returns 0.

See Also

See Also

`nargoutchk` | `varargout`

Topics

"Find Number of Function Arguments"
"Argument Checking in Nested Functions"

Introduced before R2006a

nargoutchk

Validate number of output arguments

Syntax

```
nargoutchk(minArgs,maxArgs)
msgText = nargoutchk(minArgs,maxArgs,numArgs)
msgStruct = nargoutchk(minArgs,maxArgs,numArgs,'struct')
```

Description

`nargoutchk(minArgs,maxArgs)` validates the number of output arguments. `nargoutchk` throws an error if the number of outputs specified in the function call is less than `minArgs` or greater than `maxArgs`. If the number of outputs is between `minArgs` and `maxArgs` (inclusive), `nargoutchk` does nothing.

`msgText = nargoutchk(minArgs,maxArgs,numArgs)` validates the value of `numArgs`, and returns a message if `numArgs` is less than `minArgs` or greater than `maxArgs`.

Note: `nargoutchk(minargs,maxargs,numargs)` is not recommended.

`msgStruct = nargoutchk(minArgs,maxArgs,numArgs,'struct')` returns a message structure.

Note: `nargoutchk(minargs,maxargs,numargs,'struct')` is not recommended.

Examples

Number of Outputs Within Expected Range

Verify that a function is called with a minimum of two and maximum of five output arguments.

In a file, `checkOutputs.m`, in your current working folder, create the following function. The function signature indicates that `checkOutputs` accepts a variable number of output arguments.

```
function varargout = checkOutputs(varargin)
minArgs=2;
maxArgs=5;
nargoutchk(minArgs,maxArgs)

disp("You requested " + nargout + " outputs.")

varargout = cell(nargout,1);
for k=1:nargout
    varargout{k} = randi(100);
end
end
```

At the command prompt, call the function with one output argument.

```
a = checkOutputs(13)
```

```
Error using checkOutputs (line 4)
Not enough output arguments.
```

Call the function again with five output arguments.

```
[a,b,c,d,e] = checkOutputs(7,42);
```

```
You requested 5 outputs.
```

Call the function again with six output arguments.

```
[a,b,c,d,e,f] = checkOutputs(7,42);
```

```
Error using checkOutputs (line 4)
Too many output arguments.
```

- "Validate Number of Function Arguments"

Input Arguments

`minArgs` — Minimum number accepted outputs
scalar numeric value

Minimum number accepted of outputs, specified as a scalar numeric value.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`maxArgs` — Maximum number accepted outputs
scalar numeric value

Maximum number accepted of outputs, specified as a scalar numeric value.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`numArgs` — Number of function outputs
scalar numeric value

Note: Use of `numargs` is not recommended.

Number of function outputs, specified as a scalar numeric value. Typically, you use the `nargout` function to determine the number of output arguments specified in the function call.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`msgText` — Message text
`'Not enough output arguments.'` | `'Too many output arguments.'` | empty matrix

Note: Use of `msgText` is not recommended.

Message text, returned as `'Not enough output arguments.'`, `'Too many output arguments.'`, or an empty matrix.

If `numArgs` is less than `minArgs`, `nargoutchk` returns a character vector with the value `'Not enough output arguments.'`. If `numArgs` is greater than

`maxArgs`, `nargoutchk` returns a character value with the value `'Too many output arguments.'`. Otherwise, `nargoutchk` returns an empty matrix.

`msgStruct` — Message and identifier
structure

Note: Use of `msgStruct` is not recommended.

Message and identifier, returned as a structure with `message` and `identifier` fields. If `numArgs` is less than `minArgs`, `nargoutchk` returns the following structure.

```
       message: 'Not enough output arguments.'
    identifier: 'MATLAB:nargoutchk:notEnoughOutputs'
```

If `numArgs` is greater than `maxArgs`, `nargoutchk` returns the following structure.

```
       message: 'Too many output arguments.'
    identifier: 'MATLAB:nargoutchk:tooManyOutputs'
```

Otherwise, `nargoutchk` returns an empty structure.

Tips

- To verify that there are a minimum number of arguments, with no maximum number, specify `inf` as `maxArgs`. For example: `nargoutchk(5,inf)` throws an error when there are not at least five outputs.
- To verify that there is an exact number of arguments, specify the same value for `minArgs` and `maxArgs` For example: `nargoutchk(3,3)` throws an error when there are not exactly three outputs.
- If `minArgs` is 0 and `maxArgs` is `nargout`, you do not need to use `nargoutchk`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`nargout` | `varargout`

Topics

"Validate Number of Function Arguments"

Introduced before R2006a

NaT

Not-a-Time

NaT is the representation for Not-a-Time, a value that can be stored in a datetime array to indicate an unknown or missing datetime value.

The datetime function creates a NaT value automatically when it cannot convert text to a datetime value, or for elements in a datetime array where the Year, Month, Day, Hour, Minute, or Second properties are set to NaN. You also can assign the character vector, 'NaT', to elements of an existing datetime array. Use the NaT function to create a new datetime array containing only NaT values.

Syntax

```
NaT
t = NaT(n)
t = NaT(sz1,...,szN)
t = NaT(sz)

t = NaT(___,'Format',fmt)
t = NaT(___,'TimeZone',tz)
```

Description

NaT returns a scalar Not-a-Time (NaT) datetime value.

t = NaT(n) returns an n-by-n matrix of NaT values.

t = NaT(sz1,...,szN) returns a sz1-by-...-by-szN array of NaT values where sz1,...,szN indicates the size of each dimension. For example, NaT(3,4) returns a 3-by-4 array of NaT values.

t = NaT(sz) returns an array of NaT values where the size vector, sz, defines size(t). For example, NaT([3,4]) returns a 3-by-4 array of NaT values.

t = NaT(___,'Format',fmt) returns a datetime array with the specified display format. Use this syntax to initialize a datetime array. Not-a-Time values always display as NaT, but non-NaT values assigned to the array will display using the specified format.

`t = NaT( ___ ,'TimeZone',tz)` returns an array of `NaT` values in the time zone specified by `tz`.

Examples

Square NaT Matrix

Create a 3-by-3 matrix of `NaT` values.

```
t = NaT(3)
```

```
t = 3×3 datetime array
   NaT   NaT   NaT
   NaT   NaT   NaT
   NaT   NaT   NaT
```

Initialize Rectangular datetime Array and Specify Format

Create a 2-by-3 array of `NaT` values and specify a date format.

```
t = NaT(2,3,'Format','dd/MM/yyyy')
```

```
t = 2×3 datetime array
   NaT   NaT   NaT
   NaT   NaT   NaT
```

Assign a `datetime` value to an element of `t`.

```
t(1,2) = datetime('today')
```

```
t = 2×3 datetime array
   NaT          24/02/2017   NaT
   NaT          NaT          NaT
```

Input Arguments

n — Size of square matrix
integer

Size of square matrix, specified as an integer.

- If `n` is `0`, then `t` is an empty matrix.
- If `n` is negative, then it is treated as `0`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz1,...,szN` — Size of each dimension (as separate arguments)
integer values

Size of each dimension, specified as separate arguments of integer values.

- If the size of any dimension is `0`, then `t` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz` — Size of each dimension (as a row vector)
integer values

Size of each dimension, specified as a row vector of integer values. Each element of this vector indicates the size of the corresponding dimension:

- If the size of any dimension is `0`, then `t` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.

Example: `sz = [2,3,4]` creates a 2-by-3-by-4 array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`fmt` — Date format
`'default'` (default) | `'defaultdate'` | character vector

Date format, specified as a character vector. Use the letters `A-Z` and `a-z` to define the format. For a complete list of valid letter identifiers, see the Format property for datetime arrays.

Alternatively, use one of the following character vectors to specify a default format.

Value of `fmt`	Description
`'default'`	Use the default display format.
`'defaultdate'`	Use the default display format for datetime values created without time components.

Example: `'yyyy MMM dd'`

Data Types: `char`

`tz` — Time zone region

`''` (default) | character vector

Time zone region, specified as a character vector.

The value of `tz` can be:

- `''`, to create an "unzoned" `datetime` array that does not belong to a specific time zone.
- The name of a time zone region from the IANA Time Zone Database, for example, `'America/Los_Angeles'`. The name of a time zone region accounts for the current and historical rules for standard and daylight offsets from UTC that are observed in a geographic region.
- An ISO 8601 character vector of the form `+HH:mm` or `-HH:mm`, for example, `'+01:00'`, to specify a time zone that is a fixed offset from UTC.
- `'UTC'`, to create a `datetime` array in Universal Coordinated Time.
- `'UTCLeapSeconds'`, to create a `datetime` array in Universal Coordinated Time that accounts for leap seconds.
- `'local'`, to create a `datetime` array in the system time zone.

This table lists some common names of time zone regions from the IANA Time Zone Database.

Value of `TimeZone`	UTC Offset	UTC DST Offset
`'Africa/Johannesburg'`	+02:00	+02:00
`'America/Chicago'`	−06:00	−05:00
`'America/Denver'`	−07:00	−06:00
`'America/Los_Angeles'`	−08:00	−07:00

Value of `TimeZone`	UTC Offset	UTC DST Offset
`'America/New_York'`	−05:00	−04:00
`'America/Sao_Paulo'`	−03:00	−02:00
`'Asia/Hong_Kong'`	+08:00	+08:00
`'Asia/Kolkata'`	+05:30	+05:30
`'Asia/Tokyo'`	+09:00	+09:00
`'Australia/Sydney'`	+10:00	+11:00
`'Europe/London'`	+00:00	+01:00
`'Europe/Zurich'`	+01:00	+02:00

Data Types: `char`

See Also

See Also

`datetime` | `isnat` | `nan`

Introduced in R2015b

native2unicode

Convert numeric bytes to Unicode character representation

Syntax

```
unicodestr = native2unicode(bytes)
unicodestr = native2unicode(bytes, encoding)
```

Description

`unicodestr = native2unicode(bytes)` converts a numeric vector, `bytes`, from the user default encoding to a Unicode character representation. `native2unicode` treats `bytes` as a vector of 8-bit bytes, and each value must be in the range [0,255]. The output argument `unicodestr` is a `char` vector having the same general array shape as `bytes`.

`unicodestr = native2unicode(bytes, encoding)` converts `bytes` to a Unicode representation with the assumption that `bytes` is in the character encoding scheme specified by the character vector `encoding`. `encoding` must have no characters (`''`) or it must be a name or alias for an encoding scheme. Some examples are `'UTF-8'`, `'latin1'`, `'US-ASCII'`, and `'Shift_JIS'`. If `encoding` is unspecified or has no characters (`''`), the default encoding scheme is used.

Note If `bytes` is a `char` vector, it is returned unchanged.

Examples

This example begins with a vector of bytes in an unknown character encoding scheme. The user-written function `detect_encoding` determines the encoding scheme. If successful, it returns the encoding scheme name or alias as a character vector. If unsuccessful, it throws an error represented by an MException object, `ME`. The example calls `native2unicode` to convert the bytes to Unicode representation:

```
try
    enc = detect_encoding(bytes);
```

```
    str = native2unicode(bytes, enc);
    disp(str);
catch ME
    rethrow(ME);
end
```

Note that the computer must be configured to display text in a language represented by the detected encoding scheme for the output of `disp(str)` to be correct.

See Also

`unicode2native`

Introduced before R2006a

nchoosek

Binomial coefficient or all combinations

Syntax

```
b = nchoosek(n,k)
C = nchoosek(v,k)
```

Description

`b = nchoosek(n,k)` returns the binomial coefficient, defined as $n!/((n-k)!\ k!)$. This is the number of combinations of `n` items taken `k` at a time.

`C = nchoosek(v,k)` returns a matrix containing all possible combinations of the elements of vector `v` taken `k` at a time. Matrix `C` has `k` columns and $n!/((n-k)!\ k!)$ rows, where n is `length(v)`.

Examples

Binomial Coefficient, "5 Choose 4"

```
b = nchoosek(5,4)
```

```
b = 5
```

All Combinations of Five Numbers Taken Four at a Time

```
v = 2:2:10;
C = nchoosek(v,4)
```

```
C =

     2     4     6     8
     2     4     6    10
     2     4     8    10
     2     6     8    10
     4     6     8    10
```

All Combinations of Three Unsigned Integers Taken Two at a Time

```
v = uint16([10 20 30]);
C = nchoosek(v,uint16(2))
```

```
C = 3×2 uint16 matrix

   10   20
   10   30
   20   30
```

Input Arguments

n — Number of possible choices

scalar, real, nonnegative value

Number of possible choices, specified as a scalar value of any numeric type that is real and nonnegative.

Example: `10`

Example: `int16(10)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

k — Number of selected choices

scalar, real, nonnegative value

Number of selected choices, specified as a scalar value that is real and nonnegative. `k` can be any numeric type. However, `nchoosek(n,k)` requires that `n` and `k` be the same type or that at least one of them be of type `double`.

There are no restrictions on combining inputs of different types for `nchoosek(v,k)`.

Example: `3`

Example: `int16(3)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

v — Set of all choices

vector of numeric, `logical`, or `char` values

Set of all choices, specified as a vector of numeric, `logical`, or `char` values.

Example: `[1 2 3 4 5]`

Example: `[1+1i 2+1i 3+1i 4+1i]`

Example: `int16([1 2 3 4 5])`

Example: `[true false true false]`

Example: `['abcd']`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

Output Arguments

b — Binomial coefficient

nonnegative scalar value

Binomial coefficient, returned as a nonnegative scalar value. `b` is the same type as `n` and `k`. If `n` and `k` are of different types, then `b` is returned as the nondouble type.

C — All combinations of v

matrix

All combinations of `v`, returned as a matrix of the same type as `v`. Matrix `C` has `k` columns and $n!/((n-k)!\ k!)$ rows, where n is `length(v)`.

Each row of `C` contains a combination of `k` items chosen from `v`. The elements in each row of `C` are listed in the same order as they appear in `v`.

Limitations

- When `b = nchoosek(n,k)` is sufficiently large, `nchoosek` displays a warning that the result might not be exact. In this case, the result is only accurate to 15 digits for double-precision inputs, or 8 digits for single-precision inputs.

- `C = nchoosek(v,k)` is only practical for situations where `length(v)` is less than about `15`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- When the first input, `x`, is a scalar, `nchoosek` returns a binomial coefficient. In this case, `x` must be a nonnegative integer. It cannot have type `int64` or `uint64`.
- When the first input, `x`, is a vector, `nchoosek` treats it as a set. In this case, `x` can have type `int64` or `uint64`.
- The second input, `k`, cannot have type `int64` or `uint64`.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`perms`

Introduced before R2006a

ndgrid

Rectangular grid in N-D space

Syntax

```
[X1,X2,...,Xn] = ndgrid(x1,x2,...,xn)
[X1,X2,...,Xn] = ndgrid(x1)
```

Description

`[X1,X2,...,Xn] = ndgrid(x1,x2,...,xn)` replicates the grid vectors `x1,x2,...,xn` to produce an `n`-dimensional full grid.

`[X1,X2,...,Xn] = ndgrid(x1)` specifies a single grid vector `x1` to use for all dimensions. The number of output arguments you specify determines the dimensionality `n` of the output.

Examples

Create 2-D Grid

Create a 2-D grid from the vectors `[1 3 5 7 9 11 13 15 17 19]` and `[2 4 6 8 10 12]`.

```
[X,Y] = ndgrid(1:2:19,2:2:12)
```

```
X =

     1     1     1     1     1     1
     3     3     3     3     3     3
     5     5     5     5     5     5
     7     7     7     7     7     7
     9     9     9     9     9     9
    11    11    11    11    11    11
    13    13    13    13    13    13
```

```
    15    15    15    15    15    15
    17    17    17    17    17    17
    19    19    19    19    19    19


Y =

     2     4     6     8    10    12
     2     4     6     8    10    12
     2     4     6     8    10    12
     2     4     6     8    10    12
     2     4     6     8    10    12
     2     4     6     8    10    12
     2     4     6     8    10    12
     2     4     6     8    10    12
     2     4     6     8    10    12
     2     4     6     8    10    12
```

Evaluate Function Over Gridded Domain

Evaluate and plot the function

$$x_1 e^{-x_1^2 - x_2^2}$$

over the gridded domain

$-2 < x_1 < 2$ and $-2 < x_2 < 2$.

Create a grid of values for the domain.

```
[X1,X2] = ndgrid(-2:.2:2);
```

Evaluate the function over the domain.

```
Z = X1 .* exp(-X1.^2 - X2.^2);
```

Generate a mesh plot of the function.

```
mesh(X1,X2,Z)
```

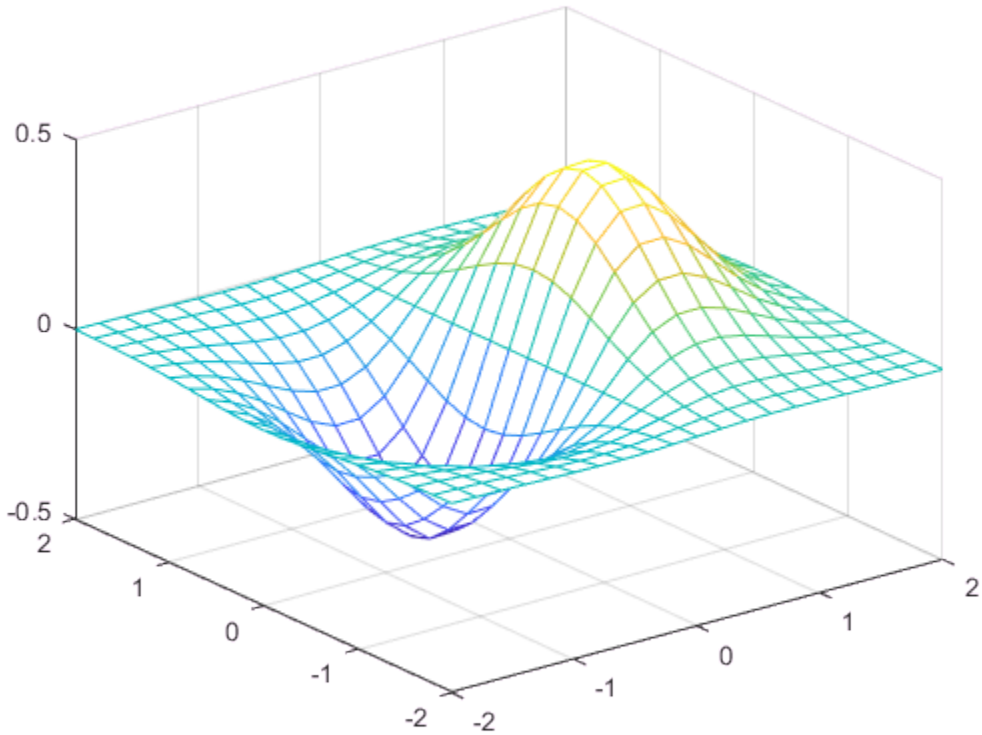

In R2016b and later releases, this task does not require the use of `ndgrid`. Instead, you can construct the grid using implicit expansion with these commands:

```
x = -2:.2:2;
```

```
Z1 = x.' .* exp(-(x.').^2 - x.^2);
```

Interpolate Data

Create a 2-D grid and calculate some function values on the grid. Interpolate between the assigned values to refine the grid.

Create a coarse grid for (x, y) in the range $[-5, 5]$.

```
[X,Y] = ndgrid(-5:0.5:5);
```

Calculate some function values on the grid and plot the function.

```
f = sin(X.^2) * cos(Y.^2);
surf(X,Y,f)
```

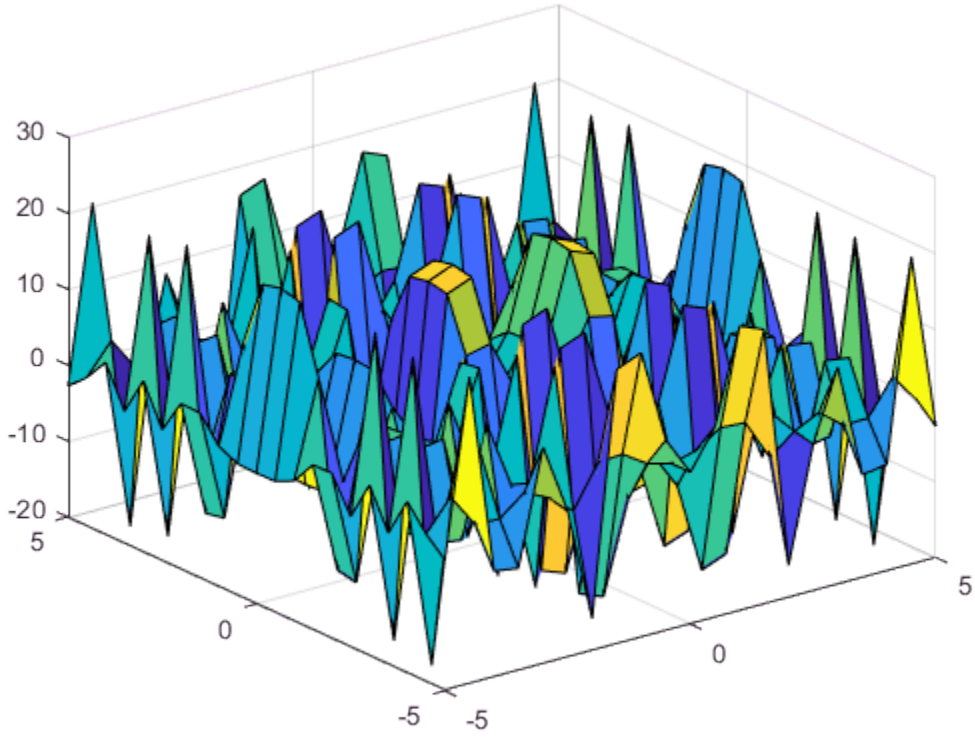

Interpolate between the points using a more refined grid and plot the result.

```
[X1,Y1] = ndgrid(-5:0.125:5);
F = interpn(X,Y,f,X1,Y1,'spline');

surf(X1,Y1,F)
```

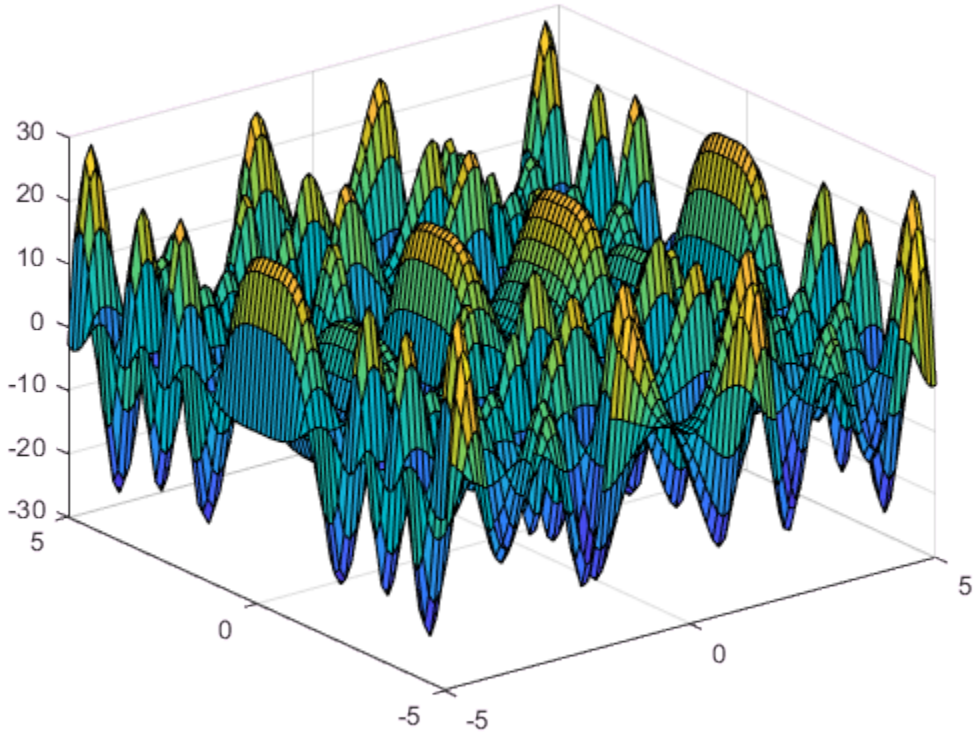

Input Arguments

x1, x2, xn — Grid vectors

vectors

Grid vectors, specified as vectors containing grid coordinates for each dimension. The grid vectors implicitly define the grid. For example, in 2-D:

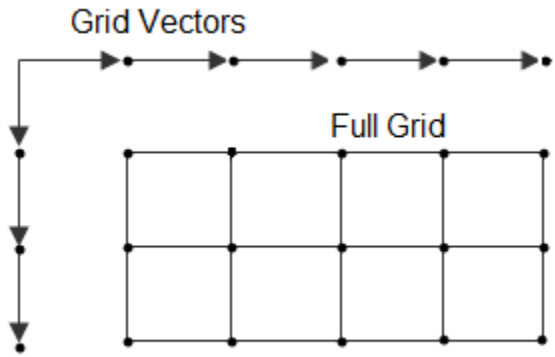

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`
Complex Number Support: Yes

Output Arguments

`X1, X2, Xn` — Full grid representation
array

Full grid representation, returned as separate arrays. For each output array `Xi`, the `i`th dimension contains copies of the grid vector `xi`.

Tips

- The `ndgrid` function is similar to `meshgrid`. However, `ndgrid` supports 1-D to N-D while `meshgrid` is restricted to 2-D and 3-D.

  The coordinates produced by each function are the same, but the shape of the output arrays in the first two dimensions is different. For grid vectors `x1`, `x2` and `x3` of lengths `M`, `N` and `P`, respectively, the command `ndgrid(x1,x2)` outputs arrays of size `M`-by-`N` while `meshgrid(x1,x2)` outputs arrays of size `N`-by-`M`.

  Similarly, `ndgrid(x1,x2,x3)` outputs arrays of size `M`-by-`N`-by-`P` while `meshgrid(x1,x2,x3)` outputs arrays of size `N`-by-`M`-by-`P`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`griddedInterpolant` | `mesh` | `meshgrid` | `surf`

Introduced before R2006a

ndims

Number of array dimensions

Syntax

```
N = ndims(A)
```

Description

`N = ndims(A)` returns the number of dimensions in the array `A`. The number of dimensions is always greater than or equal to *2*. The function ignores trailing singleton dimensions, for which `size(A,dim) = 1`.

Examples

Find Dimensions of Vector

Create a row vector.

```
A = 1:5;
```

Find the number of dimensions in the vector.

```
ndims(A)
```

```
ans = 2
```

The result is `2` because the vector has a size of 1-by-5.

Find Dimensions of Cell Array

Create a cell array of character vectors.

```
A{1,1,1} = 'cell_1';
A{1,1,2} = 'cell_2';
A{1,1,3} = 'cell_3'
```

```
A = 1×1×3 cell array
```

```
(:,:,1) =

    'cell_1'


(:,:,2) =

    'cell_2'


(:,:,3) =

    'cell_3'
```

Find the number of dimensions of the cell array.

```
ndims(A)
```

```
ans = 3
```

The result is 3 because the cell array has a size of 1-by-1-by-3.

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array | table | timetable

Input array, specified as a scalar, vector, matrix, multidimensional array, table, or timetable.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string | struct | cell | table | timetable | categorical | datetime | duration | calendarDuration

Algorithms

The number of dimensions in an array is the same as the length of the size vector of the array. In other words, `ndims(A) = length(size(A))`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`length` | `size`

Introduced before R2006a

ne, ~=

Determine inequality

Syntax

```
A ~= B
ne(A,B)
```

Description

`A ~= B` returns a logical array with elements set to logical `1` (`true`) where arrays `A` and `B` are not equal; otherwise, the element is logical `0` (`false`). The test compares both real and imaginary parts of numeric arrays. `ne` returns logical `1` (`true`) where `A` or `B` have NaN or undefined categorical elements.

`ne(A,B)` is an alternative way to execute `A ~= B`, but is rarely used. It enables operator overloading for classes.

Examples

Inequality of Two Vectors

Create two vectors containing both real and imaginary numbers, then compare the vectors for inequality.

```
A = [1+i 3 2 4+i];
B = [1 3+i 2 4+i];
A ~= B
```

```
ans = 1×4 logical array
   1   1   0   0
```

The `ne` function tests both real and imaginary parts for inequality, and returns logical `1` (`true`) where one or both parts are not equal.

Find Characters

Create a character vector.

```
M = 'masterpiece';
```

Test for the presence of a specific character using ~=.

```
M ~= 'n'
```

```
ans = 1×11 logical array
   1   1   1   1   1   1   1   1   1   1   1
```

The value of logical 1 (true) indicates the absence of the character 'n'. The character is not present in the vector.

Find Values in Categorical Array

Create a categorical array with two values: 'heads' and 'tails'.

```
A = categorical({'heads' 'heads' 'tails'; 'tails' 'heads' 'tails'})
```

```
A = 2×3 categorical array
     heads      heads      tails
     tails      heads      tails
```

Find all values not in the 'heads' category.

```
A ~= 'heads'
```

```
ans = 2×3 logical array
   0   0   1
   1   0   1
```

A value of logical 1 (true) indicates a value not in the category. Since A only has two categories, A ~= 'heads' returns the same answer as A == 'tails'.

Compare the rows of A for inequality.

```
A(1,:) ~= A(2,:)
```

```
ans = 1×3 logical array
```

```
   1   0   0
```

A value of logical `1` (`true`) indicates where the rows have unequal category values.

Compare Floating-Point Numbers

Many numbers expressed in decimal text cannot be represented exactly as binary floating numbers. This leads to small differences in results that the `~=` operator reflects.

Perform a few subtraction operations on numbers expressed in decimal and store the result in `C`.

```
C = 0.5-0.4-0.1
```

```
C = -2.7756e-17
```

With exact decimal arithmetic, `C` should be equal to *exactly* `0`. Its small value is due to the nature of binary floating-point arithmetic.

Compare `C` to `0` for inequality.

```
C ~= 0
```

```
ans = logical
   1
```

Compare floating-point numbers using a tolerance, `tol`, instead of using `~=`.

```
tol = eps(0.5);
abs(C-0) > tol
```

```
ans = logical
   0
```

The two numbers, `C` and `0`, are closer to one another than two consecutive floating-point numbers near `0.5`. In many situations, `C` may act like `0`.

Inequality of Two Datetime Arrays

Compare the elements of two `datetime` arrays for inequality.

Create two `datetime` arrays in different time zones.

```
t1 = [2014,04,14,9,0,0;2014,04,14,10,0,0];
A = datetime(t1,'TimeZone','America/Los_Angeles');
A.Format = 'd-MMM-y HH:mm:ss Z'
```

```
A = 2×1 datetime array
   14-Apr-2014 09:00:00 -0700
   14-Apr-2014 10:00:00 -0700
```

```
t2 = [2014,04,14,12,0,0;2014,04,14,12,30,0];
B = datetime(t2,'TimeZone','America/New_York');
B.Format = 'd-MMM-y HH:mm:ss Z'
```

```
B = 2×1 datetime array
   14-Apr-2014 12:00:00 -0400
   14-Apr-2014 12:30:00 -0400
```

Check where elements in A and B are not equal.

```
A~=B
```

```
ans = 2×1 logical array
   0
   1
```

Input Arguments

A — Left array

scalar | vector | matrix | multidimensional array

Left array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see “Compatible Array Sizes for Basic Operations”.

If A and B are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is a categorical array, the other input can be a categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have the same sets of categories, including their order. If both inputs are categorical arrays that are not ordinal, they can have different sets of categories. See "Compare Categorical Array Elements" for more details.
- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.
- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, a character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

B — Right array

scalar | vector | matrix | multidimensional array

Right array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are categorical, datetime, or duration arrays, then they must be the same size unless one is a scalar.

- If one input is a categorical array, the other input can be a categorical array, a cell array of character vectors, or a single character vector. A single character vector expands into a cell array of character vectors of the same size as the other input. If both inputs are ordinal categorical arrays, they must have the same sets of categories, including their order. If both inputs are categorical arrays that are not ordinal, they can have different sets of categories. See "Compare Categorical Array Elements" for more details.
- If one input is a datetime array, the other input can be a datetime array, a character vector, or a cell array of character vectors.

- If one input is a duration array, the other input can be a duration array or a numeric array. The operator treats each numeric value as a number of standard 24-hour days.
- If one input is a string array, the other input can be a string array, character vector, or a cell array of character vectors. The corresponding elements of A and B are compared lexicographically.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- You cannot use `ne` to test inequality between an enumeration member and a character array or cell array of character arrays.

See Also

See Also

`eq` | `ge` | `gt` | `le` | `lt`

Topics

"Array Comparison with Relational Operators"
"MATLAB Operators and Special Characters"

Introduced before R2006a

nearestNeighbor

Class: DelaunayTri

(Not recommended) Point closest to specified location

Note: `nearestNeighbor(DelaunayTri)` is not recommended. Use nearestNeighbor(triangulation) instead.

`DelaunayTri` is not recommended. Use delaunayTriangulation instead.

Syntax

```
PI = nearestNeighbor(DT,QX)
PI = nearestNeighbor(DT,QX,QY)
PI = nearestNeighbor(DT,QX,QY,QZ)
[PI,D] = nearestNeighbor(DT,QX,...)
```

Description

`PI = nearestNeighbor(DT,QX)` returns the index of the nearest point in `DT.X` for each query point location in `QX`.

`PI = nearestNeighbor(DT,QX,QY)` and `PI = nearestNeighbor(DT,QX,QY,QZ)` allow the query points to be specified in column vector format when working in 2-D and 3-D.

`[PI,D] = nearestNeighbor(DT,QX,...)` returns the index of the nearest point in `DT.X` for each query point location in `QX`. The corresponding Euclidean distances between the query points and their nearest neighbors are returned in `D`.

Note: `nearestNeighbor` is not supported for 2-D triangulations that have constrained edges.

Input Arguments

`DT`	Delaunay triangulation.
`QX`	The matrix `QX` is of size `mpts`-by-`ndim`, `mpts` being the number of query points and `ndim` the dimension of the space where the points reside.

Output Arguments

`PI`	`PI` is a column vector of point indices that index into the points `DT.X`. The length of `PI` is equal to the number of query points `mpts`
`D`	`D` is a column vector of length `mpts`.

Examples

Create a Delaunay triangulation:

```
x = rand(10,1);
y = rand(10,1);
dt = DelaunayTri(x,y);
```

Create query points:

```
qrypts = [0.25 0.25; 0.5 0.5];
```

Find the nearest neighbors to the query points:

```
pid = nearestNeighbor(dt, qrypts)
```

See Also

delaunayTriangulation | pointLocation | triangulation

neighbors

Class: TriRep

(Not recommended) Simplex neighbor information

Note: `neighbors(TriRep)` is not recommended. Use neighbors(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
SN = neighbors(TR, SI)
```

Description

`SN = neighbors(TR, SI)` returns the simplex neighbor information for the specified simplices `SI`.

Input Arguments

`TR`	Triangulation representation.
`SI`	`SI` is a column vector of simplex indices that index into the triangulation matrix `TR.Triangulation`. If `SI` is not specified the neighbor information for the entire triangulation is returned, where the neighbors associated with simplex `i` are defined by the `i`'th row of `SN`.

Output Arguments

`SN`	`SN` is an `m`-by-`n` matrix, where `m = length(SI)` , the number of specified simplices, and `n` is the number of neighbors per simplex. Each row `SN(i,:)` represents the neighbors of the simplex `SI(i)`.

By convention, the simplex opposite `vertex(j)` of simplex `SI(i)` is `SN(i,j)`. If a simplex has one or more boundary facets, the nonexistent neighbors are represented by `NaN`.

Examples

Example 1

Load a 3-D triangulation and use `TriRep` to compute the neighbors of all tetrahedra.

```
load tetmesh
trep = TriRep(tet, X)
nbrs = neighbors(trep)
```

Example 2

Query a 2-D triangulation created using `DelaunayTri`.

```
x = rand(10,1)
y = rand(10,1)
dt = DelaunayTri(x,y)
```

Find the neighbors of the first triangle:

```
n1 = neighbors(dt, 1)
```

Definitions

Simplex

A *simplex* is a triangle/tetrahedron or higher-dimensional equivalent.

Facet

A *facet* is an edge of a triangle or a face of a tetrahedron.

See Also

triangulation | delaunayTriangulation

NET

Summary of functions in MATLAB .NET interface

Description

Use the following functions to bring assemblies from the Microsoft .NET Framework into the MATLAB environment. The functions are implemented as a package called NET. To use these functions, prefix the function name with package name NET.

BeginInvoke	Initiate asynchronous .NET delegate call
cell	Create cell array
Combine	Convenience function for static .NET System.Delegate Combine method
enableNETfromNetworkDrive	Enable access to .NET commands from network drive
EndInvoke	Retrieve result of asynchronous call initiated by .NET System.Delegate BeginInvoke method
NET.addAssembly	Make .NET assembly visible to MATLAB
NET.Assembly	Members of .NET assembly
NET.convertArray	Convert numeric MATLAB array to .NET array
NET.createArray	Array for nonprimitive .NET types
NET.createGeneric	Create instance of specialized .NET generic type
NET.disableAutoRelease	Lock .NET object representing a RunTime Callable Wrapper (COM Wrapper) so that MATLAB does not release COM object
NET.enableAutoRelease	Unlock .NET object representing a RunTime Callable Wrapper (COM Wrapper) so that MATLAB releases COM object
NET.GenericClass	Represent parameterized generic type definitions

NET.invokeGenericMethod	Invoke generic method of object
NET.isNETSupported	Check for supported Microsoft .NET Framework
NET.NetException	Capture error information for .NET exception
NET.setStaticProperty	Static property or field name
Remove	Convenience function for static .NET System.Delegate Remove method
RemoveAll	Convenience function for static .NET System.Delegate RemoveAll method

See Also

Topics

"Call .NET Libraries"

NET.addAssembly

Package: NET

Make .NET assembly visible to MATLAB

Syntax

```
asmInfo = NET.addAssembly(globalName)
asmInfo = NET.addAssembly(privateName)
```

Description

`asmInfo = NET.addAssembly(globalName)` loads a global .NET assembly into MATLAB.

`asmInfo = NET.addAssembly(privateName)` loads a private .NET assembly.

Limitations

- `NET.addAssembly` does not support assemblies generated by the MATLAB Compiler SDK product.

Input Arguments

`globalName`

One of the following:

- Character vector representing the name of a global assembly.
- Instance of `System.Reflection.AssemblyName` class.

Default:

`privateName`

Character vector representing the full path of a private assembly.

Default:

Output Arguments

asmInfo

NET.Assembly object containing names of the members of the assembly.

Examples

Display today's date using `System.DateTime` in the `mscorlib` assembly.

```
System.DateTime.Now.ToLongDateString
```

Call the `System.Windows.Forms.MessageBox.Show` method in the global assembly `System.Windows.Forms`.

```
asm = NET.addAssembly('System.Windows.Forms');
import System.Windows.Forms.*
MessageBox.Show('Simple Message Box')
```

Display classes in the private assembly `NetSample.dll`.

```
asm = NET.addAssembly('c:\work\NetSample.dll');
asm.Classes
```

Tips

- MATLAB dynamically loads the `mscorlib.dll` and `system.dll` assemblies from the .NET Framework class library the first time you type `"NET."` or `"System."`. You do not need to call `NET.addAssembly` to access classes in these assemblies.
- Refer to your .NET product documentation for the name of the assembly and its deployment type (global or private).

See Also

NET.Assembly

Topics

"Assembly is Library of .NET Classes"

External Websites

MSDN AssemblyName Class

Introduced in R2009a

NET.Assembly class

Package: NET

Members of .NET assembly

Description

`NET.Assembly` object returns names of the members of an assembly.

Construction

The `NET.addAssembly` function creates an instance of this class.

Properties

`AssemblyHandle`

Instance of `System.Reflection.Assembly` class of the added assembly.

`Classes`

`nClassx1` cell array of class names of the assembly, where `nClass` is the number of classes.

`Enums`

`nEnumx1` cell array of enumerations of the assembly, where `nEnum` is the number of enumerations.

`Structures`

`nStructx1` cell array of structures of the assembly, where `nStruct` is the number of structures.

`GenericTypes`

`nGenTypex1` cell array of generic types of the assembly, where `nGenType` is the number of generic types.

`Interfaces`

`nInterfacex1` cell array of interface names of the assembly, where `nInterface` is the number of interfaces.

`Delegates`

`nDelegatex1` cell array of delegates of the assembly, where `nDelegate` is the number of delegates.

See Also

`NET.addAssembly`

Topics

"What Classes Are in a .NET Assembly?"

NET.convertArray

Package: NET

Convert numeric MATLAB array to .NET array

Note: MATLAB automatically converts arrays to .NET types. For information, see "Use Arrays with .NET Applications".

Syntax

```
arrObj = NET.convertArray(V,'arrType',[m,n])
```

Description

`arrObj = NET.convertArray(V,'arrType',[m,n])` converts a MATLAB array `V` to a .NET array. Optional value `arrType` is a character vector representing a namespace-qualified .NET array type. To convert a MATLAB vector to a two-dimensional .NET array (either 1-by-n or m-by-1), use optional values `m,n`. If `V` is a MATLAB vector and you do not specify the number of dimensions and their sizes, the output `arrObj` is a one-dimensional .NET array.

If you do not specify `arrType`, MATLAB converts the type according to the MATLAB Primitive Type Conversion Table. See "Pass Primitive .NET Types".

Examples

Create a list `L` of random `System.Int32` integers using the `System.Collections.Generic.List` class, and then sort the results.

```
% Create array R of random integers
nInt = 5;
R = randi(100,1,nInt);
% Create .NET array A
```

```
A = NET.convertArray(R,'System.Int32');
% Put A into L, a generic collections list
L = NET.createGeneric('System.Collections.Generic.List',{'System.Int32'},A.Length);
L.AddRange(A)
% Sort the values in L
L.Sort
```

See Also

NET.createArray

Introduced in R2009a

NET.createArray

Package: NET

Array for nonprimitive .NET types

Syntax

```
array = NET.createArray(typeName,[m,n,p,...])
array = NET.createArray(typeName,m,n,p,...)
```

Description

`array = NET.createArray(typeName,[m,n,p,...])` creates an `m`-by-`n`-by-`p`-by-`...` `array` of type `typeName`, which is either a fully qualified .NET array type name (`namespace` and array type name) or an instance of the `NET.GenericClass` class, in case of arrays of generic type. `m,n,p,...` are the number of elements in each dimension of the array.

`array = NET.createArray(typeName,m,n,p,...)` alternative syntax for creating an array.

You cannot specify the lower bound of an array.

Examples

Create .NET Array of Generic Type

This example creates a .NET array of `List<Int32>` generic type.

```
genType = NET.GenericClass('System.Collections.Generic.List',...
  'System.Int32');
arr = NET.createArray(genType, 5)
```

```
arr =
```

```
  List<System*Int32>[] with properties:

            Length: 5
        LongLength: 5
              Rank: 1
          SyncRoot: [1x1 System.Collections.Generic.List<System*Int32>[]]
        IsReadOnly: 0
       IsFixedSize: 1
    IsSynchronized: 0
```

Create and Initialize Jagged Array

This example creates a jagged .NET array of three elements.

```
jaggedArray = NET.createArray('System.Double[]', 3)
```

```
jaggedArray =

  Double[][] with properties

            Length: 3
        LongLength: 3
              Rank: 1
          SyncRoot: [1x1 System.Double[][]]
        IsReadOnly: 0
       IsFixedSize: 1
    IsSynchronized: 0
```

Assign values:

```
jaggedArray(1) = [1, 3, 5, 7, 9];
jaggedArray(2) = [0, 2, 4, 6];
jaggedArray(3) = [11, 22];
```

Access first value of third array:

```
jaggedArray(3,1)
```

```
ans =
    11
```

Create Jagged Array of Generic Type

This example creates a jagged array of `List<Double>` generic type.

```
genCls = NET.GenericClass('System.Collections.Generic.List[]',...
  'System.Double');
```

Create the array, genArr.

```
genArr = NET.createArray(genCls,3)
```

```
genArr =

  List<System*Double>[][] with properties:

           Length: 3
       LongLength: 3
             Rank: 1
         SyncRoot: [1x1 System.Collections.Generic.List`1[][]]
       IsReadOnly: 0
      IsFixedSize: 1
    IsSynchronized: 0
```

Create Nested Jagged Array

This command creates a jagged array of type System.Double[][][].

```
netArr = NET.createArray('System.Double[][]', 3)
```

```
netArr =

  Double[][][] with properties:

           Length: 3
       LongLength: 3
             Rank: 1
         SyncRoot: [1x1 System.Double[][][]]
       IsReadOnly: 0
      IsFixedSize: 1
    IsSynchronized: 0
```

See Also

NET.convertArray | NET.createGeneric

Introduced in R2009a

NET.createGeneric

Package: NET

Create instance of specialized .NET generic type

Syntax

```
genObj = createGeneric(className,paramTypes,varargin ctorArgs)
```

Description

`genObj = createGeneric(className,paramTypes,varargin ctorArgs)` creates an instance `genObj` of generic type `className`.

Input Arguments

`className`	Character vector containing the fully qualified generic type name.
`paramTypes`	Allowed cell types are: character vectors with fully qualified parameter type names and instances of the `NET.GenericClass` class when parameterization with another parameterized type is needed.
`ctorArgs`	Optional, variable length (0 to N) list of constructor arguments matching the arguments of the .NET generic class constructor intended to be invoked.

Output Arguments

`genObj`	Handle to the specialized generic class instance.

Examples

Create List of `System.Double` Objects

Create a strongly typed list `dblLst` of objects of type `System.Double`.

```
t = NET.createGeneric('System.Collections.Generic.List',{'System.Double'},10);
```

Create List with Key/Value Pairs

Create the `kvpType` generic association where `Key` is of `System.Int32` type and `Value` is a `System.String`.

```
kvpType = NET.GenericClass(...
    'System.Collections.Generic.KeyValuePair',...
    'System.Int32','System.String');
```

Create the list `kvpList` with initial storage capacity for 10 key-value pairs.

```
kvpList = NET.createGeneric('System.Collections.Generic.List',{kvpType},10);
```

Add Item to List

Create a `KeyValuePair` item.

```
kvpItem = NET.createGeneric(...
    'System.Collections.Generic.KeyValuePair',...
    {'System.Int32','System.String'},...
    42,'myString');
```

Add this item to the list `kvpList`.

```
Add(kvpList,kvpItem)
```

See Also

NET.GenericClass

Introduced in R2009a

NET.disableAutoRelease

Package: NET

Lock .NET object representing a RunTime Callable Wrapper (COM Wrapper) so that MATLAB does not release COM object

Syntax

```
A = NET.disableAutoRelease(obj)
```

Description

`A = NET.disableAutoRelease(obj)` locks a .NET object representing a RunTime Callable Wrapper (COM Wrapper) so that MATLAB does not release the COM object. `obj` is a .NET object representing a COM Wrapper.

Before passing a .NET object representing a COM Wrapper to another process, lock the object using this function so that MATLAB does not release it. After using the object, call `NET.enableAutoRelease` to release the COM object.

Examples

The following user-defined function, `GetComApp.m`, has access to a COM object defined in the **pseudo-class**`ComNamespace.ComClass`. One of its methods is `readData`, with the signature:

```
System.String RetVal readData(ComNamespace.ComClass this, System.String strIn)
```

The input argument is defined in the **pseudo-class** `NetDocTest.MyClass`, which has a property named `MyApp`.

```
function GetComApp(obj)
comObj = ComNamespace.ComClass;
obj.MyApp = comObj;
% To pass a COM object to another process, lock the object
NET.disableAutoRelease(comObj);
end
```

The example in `NET.enableAutoRelease` shows how to call the `GetComApp` function.

See Also

`NET.enableAutoRelease`

Topics

"How MATLAB Handles System.__ComObject"

Introduced in R2010b

NET.enableAutoRelease

Package: NET

Unlock .NET object representing a RunTime Callable Wrapper (COM Wrapper) so that MATLAB releases COM object

Syntax

```
A = NET.enableAutoRelease(obj)
```

Description

`A = NET.enableAutoRelease(obj)` releases the COM wrapper when the object goes out of scope, where `obj` is a .NET object representing a COM Wrapper.

Call this function only if the object was locked using `NET.disableAutoRelease.`

Examples

The following **pseudo-code** shows how to call a function (`GetComApp.m`, described in `NET.disableAutoRelease`) which returns a COM object. The object, `mainObj` of type `NetDocTest.MyClass`, has a property, `MyApp`. Call `GetComApp` to get a COM object, and use its `readData` method.

```
mainObj = NetDocTest.MyClass;
GetComApp(mainObj);
app = mainObj.MyApp;
app.readData('hello');
% Unlock the COM object
NET.enableAutoRelease(mainObj.MyApp);
```

See Also

`NET.disableAutoRelease`

Topics

"How MATLAB Handles System.__ComObject"

Introduced in R2010b

NET.GenericClass class

Package: NET

Represent parameterized generic type definitions

Description

The `NET.createGeneric` function uses instances of this class to create a generic specialization that requires parameterization with another parameterized type.

Construction

```
genType = NET.GenericClass(className,paramTypes)
```

Input Arguments

`className`

Character vector containing the fully qualified generic type name.

Default:

`paramTypes`

Optional, variable length (1 to N) list of types for the generic class parameterization. Allowed argument types are:

- Character vector containing the fully qualified generic type name.
- Instance of the `NET.GenericClass` class when deeper nested parameterization with another parameterized type is needed.

Default:

Examples

Create an instance of `System.Collections.Generic.List` of `System.Collections.Generic.KeyValuePair` generic associations where `Key` is of

`System.Int32` type and `Value` is a `System.String` class with initial storage capacity for 10 key-value pairs.

```
kvpType = NET.GenericClass(...
    'System.Collections.Generic.KeyValuePair',...
    'System.Int32', 'System.String');
kvpList = NET.createGeneric('System.Collections.Generic.List',...
    {kvpType}, 10);
```

See Also

`NET.createGeneric` | `NET.createArray` | `NET.invokeGenericMethod`

Topics

".NET Generic Classes"

Introduced in R2009a

NET.invokeGenericMethod

Package: NET

Invoke generic method of object

Syntax

```
[varargout] =
NET.invokeGenericMethod(obj,'genericMethodName',paramTypes,args,...)
```

Description

`[varargout] = NET.invokeGenericMethod(obj,'genericMethodName',paramTypes,args,...)` calls instance or static generic method *`genericMethodName`*.

Input Arguments

`obj`	Allowed argument types are: • Instances of class containing the generic method • Character vectors with fully qualified class name, if calling static generic methods • Instances of `NET.GenericClass` definitions, if calling static generic methods of a generic class
`genericMethodName`	Generic method name to invoke
`paramTypes`	Cell vector (1 to N) with the types for generic method parameterization, where allowed cell types are: • Character vectors with fully qualified parameter type name. • Instances of `NET.GenericClass` definitions, if using nested parameterization with another parameterized type
`args`	Optional, variable length (0 to N) list of method arguments

Output Arguments

`varargout`	Variable-length output argument list, `varargout`, from method *`genericMethodName`*

Examples

The following syntax calls a generic method that takes two parameterized types and returns a parameterized type:

```
a = NET.invokeGenericMethod(obj, ...
  'myGenericSwapMethod', ...
  {'System.Double', 'System.Double'}, ...
  5, 6);
```

To display generic methods in MATLAB, see the example “Display .NET Generic Methods Using Reflection”.

See Also

NET.GenericClass | `NET.createGeneric` | `varargout`

Topics

“Call .NET Generic Methods”

Introduced in R2009b

NET.isNETSupported

Check for supported Microsoft .NET Framework

Syntax

```
tf = NET.isNETSupported
```

Description

`tf = NET.isNETSupported` returns logical `1` (`true`) if a supported version of the Microsoft .NET Framework is found. Otherwise, it returns logical `0` (`false`) and you cannot use the .NET Framework in MATLAB.

Examples

Display Message If Supported Microsoft .NET Framework Not Found

```
if ~NET.isNETSupported
    disp('Supported .NET Framework not found')
end
```

See Also

Introduced in R2013a

NET.NetException class

Package: NET

Capture error information for .NET exception

Description

Process information from a `NET.NetException` object to handle .NET errors. This class is derived from MException.

Construction

`e = NET.NetException(msgID,errMsg,netObj)` constructs instance `e` of `NET.NetException` class.

Input Arguments

`msgID`

message identifier

`errMsg`

error message text

`netObj`

`System.Exception` object that caused the exception

Properties

`ExceptionObject`

`System.Exception` class causing the error.

Methods

Inherited Methods

See the methods of the base class MException.

Examples

Display error information after trying to load an unknown assembly:

```
try
  NET.addAssembly('C:\Work\invalidfile.dll')
catch e
  e.message;
  if(isa(e, 'NET.NetException'))
    eObj = e.ExceptionObject
  end
end
```

```
ans =
Message: Could not load file or assembly
  'file:///C:\Work\invalidfile.dll' or
  one of its dependencies. The system cannot
  find the file specified.
Source: mscorlib
HelpLink:

eObj =
  FileNotFoundException with properties:

           Message: [1x1 System.String]
          FileName: [1x1 System.String]
         FusionLog: [1x1 System.String]
              Data: [1x1 System.Collections.ListDictionaryInternal]
    InnerException: []
        TargetSite: [1x1 System.Reflection.RuntimeMethodInfo]
        StackTrace: [1x1 System.String]
          HelpLink: []
            Source: [1x1 System.String]
```

See Also

MException

Topics

Class Attributes
Property Attributes

Introduced in R2009b

NET.setStaticProperty

Package: NET

Static property or field name

Syntax

```
NET.setStaticProperty('propName', value)
```

Description

`NET.setStaticProperty('propName', value)` sets the static property or field name specified in the character vector `propName` to the given `value`.

Examples

To set the `myStaticProperty` in the given class and namespace, use the syntax:

```
NET.setStaticProperty('MyTestObject.MyClass.myStaticProperty', 5);
```

Introduced in R2009b

nccreate

Create variable in NetCDF file

Syntax

```
nccreate(filename,varname)
nccreate(filename,varname,Name,Value)
```

Description

`nccreate(filename,varname)` creates a scalar `double` variable named `varname` in the NetCDF file specified by `filename`. If `filename` does not exist, then `nccreate` creates the file using the `netcdf4_classic` format.

`nccreate(filename,varname,Name,Value)` creates a variable with additional options specified by one or more name-value pair arguments. For example, to create a nonscalar variable, use the `Dimensions` name-value pair argument.

Examples

Create New Variables in NetCDF File

Create a NetCDF file named `myexample.nc` that contains a variable named `Var1`.

```
nccreate('myexample.nc','Var1')
```

Create a second variable in the same file.

```
nccreate('myexample.nc','Var2')
```

Display the contents of the NetCDF file.

```
ncdisp('myexample.nc')
```

```
Source:
```

```
            pwd\myexample.nc
Format:
            netcdf4_classic
Variables:
    Var1
            Size:       1x1
            Dimensions:
            Datatype:   double
    Var2
            Size:       1x1
            Dimensions:
            Datatype:   double
```

Create Variable and Specify Dimensions and File Format

Create a new two-dimensional variable named `peaks` in a classic (NetCDF 3) format file named `myncclassic.nc`. Use the `'Dimensions'` name-value pair argument to specify the names and lengths of the two dimensions. Use the `'Format'` name-value pair argument to specify the file format.

```
nccreate('myncclassic.nc','peaks',...
          'Dimensions',{'r',200,'c',200},...
          'Format','classic')
```

Write data to the variable.

```
ncwrite('myncclassic.nc','peaks',peaks(200))
```

Display the contents of the NetCDF file.

```
ncdisp('myncclassic.nc')
```

```
Source:
            pwd\myncclassic.nc
Format:
            classic
Dimensions:
            r = 200
            c = 200
Variables:
    peaks
            Size:       200x200
            Dimensions: r,c
```

```
            Datatype:   double
```

Input Arguments

`filename` — File name

character vector

File name, specified as a character vector. The file is an existing NetCDF file, or the name you want to assign to a new NetCDF file.

Example: `'myFile.nc'`

`varname` — Name of new variable

character vector

Name of the new variable, specified as a character vector.

Example: `'myVar'`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example:
`nccreate('myFile.nc','Var1','Datatype','double','Format','classic')` creates a variable named `Var1` of type `NC_DOUBLE` in a NetCDF 3 file named `myFile.nc`.

`'Dimensions'` — Dimensions of variable

cell array

Dimensions of the new variable, specified as the comma-separated pair consisting of `'Dimensions'` and a cell array. The cell array lists the dimension name as a character vector followed by its numerical length, in this form: `{dname1,dlength1,dname2,dlength2, ...}`. The `dname1` input is the name of the first dimension specified as a character vector, `dlength1` is the length of the first dimension, `dname2` is the name of the second dimension, and so on. If a dimension exists,

specifying its length is optional. A variable with a single dimension is always treated as a column vector.

Use `Inf` to specify an unlimited dimension. A `netcdf4` format file can have any number of unlimited dimensions in any order. All other formats can have only one unlimited dimension per file and it must be specified last in the cell array.

`nccreate` creates the dimension at the same location as the variable. For `netcdf4` format files, you can specify a different location for the dimension using a fully qualified dimension name.

Example: `'Dimensions',{'dim1',100,'dim2',150,'dim3',Inf}`

`'Datatype'` — MATLAB data type
`'double'` (default) | character vector

MATLAB data type, specified as the comma-separated pair consisting of `'Datatype'` and a character vector containing the name of the data type. When `nccreate` creates the variable in the NetCDF file, it uses a corresponding NetCDF datatype. This table lists valid values for `'Datatype'` and the corresponding NetCDF variable type that `nccreate` creates.

Value of `Datatype`	NetCDF Variable Type
`'double'`	`NC_DOUBLE`
`'single'`	`NC_FLOAT`
`'int64'`	`NC_INT64*`
`'uint64'`	`NC_UINT64*`
`'int32'`	`NC_INT`
`'uint32'`	`NC_UINT*`
`'int16'`	`NC_SHORT`
`'uint16'`	`NC_USHORT*`
`'int8'`	`NC_BYTE`
`'uint8'`	`NC_UBYTE*`
`'char'`	`NC_CHAR`

* These data types are only available when the file is a `netcdf4` format file.

Example: `'Datatype','uint16'`

`'Format'` — NetCDF file format

`'netcdf4_classic'` (default) | character vector

NetCDF file format, specified as the comma-separated pair consisting of `'Format'` and one of these values.

Value of `Format`	Description
`'classic'`	NetCDF 3
`'64bit'`	NetCDF 3, with 64-bit offsets
`'netcdf4_classic'`	NetCDF 4 classic model
`'netcdf4'`	NetCDF 4 model (Use this format to enable group hierarchy)

If `varname` specifies a group (for example, `'/grid3/temperature'`), then `nccreate` sets the value of `Format` to `'netcdf4'`.

Example: `'Format','classic'`

`'FillValue'` — Replacement value for missing values

scalar | `'disable'`

Replacement value for missing values, specified as the comma-separated pair consisting of `'FillValue'` and a scalar or `'disable'`. The default value is specified by the NetCDF library. To disable replacement values, specify `'FillValue','disable'`.

This argument is available for `netcdf4` or `netcdf4_classic` formats only.

Example: `'FillValue',NaN`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char`

`'ChunkSize'` — Chunk size along each dimension

vector

Chunk size along each dimension, specified as the comma-separated pair consisting of `'ChunkSize'` and a vector. The first element specifies the number of rows, the second element specifies the number of columns, the third element specifies the length of the third dimension, and so on. The default value is specified by the NetCDF library.

This argument is available for `netcdf4` or `netcdf4_classic` formats only.

Example: `'ChunkSize',[5 6 9]`

Data Types: `double`

`'DeflateLevel'` — Amount of compression
`0` (default) | scalar value between `0` and `9`

Amount of compression, specified as the comma-separated pair consisting of `'DeflateLevel'` and a scalar value between `0` and `9`. `0` indicates no compression and `9` indicates the most compression.

This argument is available for `netcdf4` or `netcdf4_classic` formats only.

Example: `'DeflateLevel',5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'Shuffle'` — Status of shuffle filter
`false` (default) | `true`

Status of the shuffle filter, specified as the comma-separated pair consisting of `'Shuffle'` and `false` or `true`. `false` disables the shuffle filter and `true` enables it. The shuffle filter can assist with the compression of integer data by changing the byte order in the data stream.

This argument is available for `netcdf4` or `netcdf4_classic` formats only.

Example: `'Shuffle',true`

Data Types: `logical`

See Also

See Also
`ncdisp` | `ncinfo` | `ncwrite` | `ncwriteschema` | `netcdf`

Topics
"Export to NetCDF Files"

Introduced in R2011a

ncdisp

Display contents of NetCDF data source in Command Window

Syntax

```
ncdisp(source)
ncdisp(source,location)
ncdisp(source,location,dispFormat)
```

Description

`ncdisp(source)` displays all the groups, dimensions, variable definitions, and all attributes in the NetCDF data source, `source`, as text in the Command Window.

`ncdisp(source,location)` displays information about the variable or group specified by `location`.

`ncdisp(source,location,dispFormat)` displays the contents of the NetCDF data source, in the display format specified by `dispFormat`.

Examples

Display Contents of NetCDF File

Display the contents of the example NetCDF file, `example.nc`.

```
ncdisp('example.nc')
```

```
Source:
           matlabroot\toolbox\matlab\demos\example.nc
Format:
           netcdf4
Global Attributes:
           creation_date = '29-Mar-2010'
Dimensions:
           x = 50
           y = 50
           z = 5
```

```
Variables:
    avagadros_number
           Size:       1x1
           Dimensions:
           Datatype:   double
           Attributes:
                       description = 'this variable has no dimensions'
    temperature
           Size:       50x1
           Dimensions: x
           Datatype:   int16
           Attributes:
                       scale_factor = 1.8
                       add_offset   = 32
                       units        = 'degrees_fahrenheight'
    peaks
           Size:       50x50
           Dimensions: x,y
           Datatype:   int16
           Attributes:
                       description = 'z = peaks(50);'
Groups:
    /grid1/
        Attributes:
                   description = 'This is a group attribute.'
        Dimensions:
                   x    = 360
                   y    = 180
                   time = 0     (UNLIMITED)
        Variables:
            temp
                   Size:       []
                   Dimensions: x,y,time
                   Datatype:   int16

    /grid2/
        Attributes:
                   description = 'This is another group attribute.'
        Dimensions:
                   x    = 360
                   y    = 180
                   time = 0     (UNLIMITED)
        Variables:
            temp
```

```
                    Size:       []
                    Dimensions: x,y,time
                    Datatype:   int16
```

MATLAB displays all the groups, dimensions, and variable definitions in `example.nc`.

Display Contents of NetCDF Variable

Display the contents of the variable `peaks` in the file, `example.nc`.

```
ncdisp('example.nc','peaks')
```

```
Source:
           matlabroot\toolbox\matlab\demos\example.nc
Format:
           netcdf4
Dimensions:
           x = 50
           y = 50
Variables:
    peaks
           Size:       50x50
           Dimensions: x,y
           Datatype:   int16
           Attributes:
                       description = 'z = peaks(50);'
```

Display Contents of NetCDF File and Hide Attributes

Display only the group hierarchy and variable definitions of the example file, `example.nc`.

```
ncdisp('example.nc','/','min')
```

```
Source:
           matlabroot\toolbox\matlab\demos\example.nc
Format:
           netcdf4
Variables:
    avagadros_number
           Size:       1x1
           Dimensions:
           Datatype:   double
    temperature
           Size:       50x1
           Dimensions: x
```

```
            Datatype:   int16
    peaks
            Size:       50x50
            Dimensions: x,y
            Datatype:   int16
Groups:
    /grid1/
        Variables:
            temp
                   Size:       []
                   Dimensions: x,y,time
                   Datatype:   int16

    /grid2/
        Variables:
            temp
                   Size:       []
                   Dimensions: x,y,time
                   Datatype:   int16
```

Input Arguments

`source` — Name of NetCDF file

character vector

Name of a NetCDF file, specified as a character vector. `source` also can be the URL of an OPeNDAP NetCDF data source that resolves to a NetCDF file or a variable in a NetCDF file.

Example: `'myNetCDFfile.nc'`

Data Types: `char`

`location` — Location of variable or group

`'/'` (default) | character vector

Location of a variable or group in the NetCDF file, specified as a character vector. Set `location` to `'/'`(forward slash) to display the entire contents of the file.

Data Types: `char`

`dispFormat` — Display format

`'full'` (default) | `'min'`

Display format, specified as one of the following character vectors.

`'full'`	Display group hierarchy with dimensions, attributes, and variable definitions.
`'min'`	Display group hierarchy and variable definitions.

Data Types: `char`

Tips

- If `source` is an OPeNDAP URL with a constraint expression, use the syntax, `ncdisp(source)` with no other input arguments.

See Also

See Also

`ncinfo` | `ncread` | `ncreadatt` | `ncwrite` | `netcdf`

Topics

"Import NetCDF Files and OPeNDAP Data"

Introduced in R2011a

ncinfo

Return information about NetCDF data source

Syntax

```
finfo = ncinfo(source)
vinfo = ncinfo(source,varname)
ginfo = ncinfo(source,groupname)
```

Description

`finfo = ncinfo(source)` returns information in the structure `finfo` about the entire NetCDF data source specified by `source`, where source can be the name of a NetCDF file or the URL of an OPeNDAP NetCDF data source.

`vinfo = ncinfo(source,varname)` returns information in the structure `vinfo` about the variable `varname` in `source`.

`ginfo = ncinfo(source,groupname)` returns information in the structure `ginfo` about the group `groupname` in `source` (only NetCDF4 data sources).

Note: Use `ncdisp` for visual inspection of a NetCDF source.

Input Arguments

`source`

Character vector specifying the name of a NetCDF file or the URL of an OPeNDAP NetCDF data source.

Default:

`varname`

Character vector specifying the name of a variable in a NetCDF file or OPeNDAP data source.

Default:

`groupname`

Character vector specifying the name of a group in a NetCDF file or OPeNDAP data source.

Default:

Output Arguments

`finfo`

A structure with the following fields.

Field	Description	
`Filename`	NetCDF file name or OPeNDAP URL	
`Name`	`'/'`, indicating the full file	
`Dimensions`	An array of structures with these fields:	
	`Name`	Dimension name
	`Length`	Current length of dimension
	`Unlimited`	Boolean flag, true for unlimited dimensions
`Variables`	An array of structures with these fields:	
	`Name`	Variable name
	`Dimensions`	Associated dimensions
	`Size`	Current variable size
	`Datatype`	MATLAB datatype
	`Attributes`	Associated variable attributes
	`ChunkSize`	Chunk size, if defined. `[]` otherwise
	`FillValue`	Fill value of the variable.
	`DeflateLevel`	Deflate filter level, if enabled.

Field	Description	
	`Shuffle`	Shuffle filter enabled flag
`Attributes`	An array of global attributes with these fields:	
	`Name`	Attribute name
	`Value`	Attribute value
`Groups`	An array of groups present in the file, for `netcdf4` files; An empty array (`[ ]`) for all other NetCDF file formats.	
`Format`	The format of the NetCDF file	

`vinfo`

A structure containing only the variable fields from `finfo`.

Field	Description
`Filename`	NetCDF file name
`Name`	Name of the variable
`Dimensions`	Dimensions of the variable
`Size`	Size of the current variable
`Datatype`	MATLAB datatype
`Attributes`	Attributes associated with the variable
`ChunkSize`	Chunk size, if defined. `[ ]` otherwise.
`FillValue`	Fill value used in the variable.
`DeflateLevel`	Deflate filter level, if enabled.
`Shuffle`	Shuffle filter enabled flag
`Format`	The format of the NetCDF file

`ginfo`

A structure containing only the group fields from `finfo`.

Field	Description
`Filename`	NetCDF file name

Field	Description
`Name`	Name of the group
`Dimensions`	Only dimensions defined in the specified group
`Variables`	Only variables defined in the specified group
`Attributes`	Attributes associated with the variable
`Groups`	Names of groups, if defined. `[]` otherwise.
`Format`	The format of the NetCDF file

Examples

Search for dimensions with names that start with the character `x` in the file.

```
finfo = ncinfo('example.nc');
disp(finfo);
dimNames = {finfo.Dimensions.Name};
dimMatch = strncmpi(dimNames,'x',1);
disp(finfo.Dimensions(dimMatch));
```

Obtain the size of a variable and check if it has any unlimited dimensions.

```
vinfo = ncinfo('example.nc','peaks');
varSize = vinfo.Size;
disp(vinfo);
hasUnLimDim = any([vinfo.Dimensions.Unlimited]);
```

Find all unlimited dimensions defined in a group.

```
ginfo = ncinfo('example.nc','/grid2/');
unlimDims = [ginfo.Dimensions.Unlimited];
disp(ginfo.Dimensions(unlimDims));
```

Tutorials

- "Import NetCDF Files and OPeNDAP Data"

See Also

`ncdisp` | `ncwrite` | `ncread` | `ncwriteschema` | `netcdf`

Topics

"Import NetCDF Files and OPeNDAP Data"

Introduced in R2011a

ncread

Read data from variable in NetCDF data source

Syntax

```
vardata = ncread(source,varname)
vardata = ncread(source,varname,start,count,stride)
```

Description

`vardata = ncread(source,varname)` reads data from the variable `varname` in `source`, which can be either the name of a NetCDF file or an OPeNDAP NetCDF data source.

`vardata = ncread(source,varname,start,count,stride)` reads data from the variable `varname` in `source` beginning at the location given by `start`. `count` specifies the number of elements to read along the corresponding dimension. The optional argument `stride` specifies the inter-element spacing along each dimension.

Input Arguments

`source`

Character vector specifying the name of a NetCDF file or the URL of an OPeNDAP NetCDF data source.

Default:

`varname`

Character vector specifying the name of a variable in the NetCDF file or OPeNDAP NetCDF data source.

Default:

start

For an *N*-dimensional variable, `start` is a vector of length *N* of indices specifying the starting location. Indices are 1-based.

count

Vector of length *N* specifying the number of elements to read along the corresponding dimensions. If a particular element of `count` is `Inf`, `ncread` reads data until the end of the corresponding dimension.

stride

Optional argument that specifies the inter-element spacing along each dimension.

Default: Vector of 1s (ones)

Output Arguments

vardata

The data in the variable. `ncread` uses the MATLAB datatype that is the closest type to the corresponding NetCDF datatype, except when at least one of `_FillValue`, `scale_factor`, and `add_offset` variables attribute is present. `ncread` applies the following attribute conventions, in sequence, to `vardata` if the corresponding attribute exists for this variable:

- If the `_FillValue` attribute exists, `ncread` replaces values in `vardata` equal to the value of `_FillValue` with `NaN`s. If the`_FillValue` attribute does not exist, `ncread` queries the NetCDF library for the variable's fill value.
- If the `scale_factor` attribute exists, `ncread` multiplies `vardata` by the value of the `scale_factor` attribute.
- If the `add_offset` attribute exists, `ncread` adds the value of the `add_offset` attribute to `vardata`.

Note: For variable values containing text, the `ncread` function supports reading only of `vardata` that is ASCII encoded.

Examples

Read and display the data in the `peaks` variable in the example file.

```
ncdisp('example.nc','peaks');
peaksData  = ncread('example.nc','peaks');
peaksDesc  = ncreadatt('example.nc','peaks','description');
surf(double(peaksData));
title(peaksDesc);
```

Subsample the peaks data by a factor of 2 (read every other value along each dimension).

```
subsetdata = ncread('example.nc','peaks',...
                    [1 1], [Inf Inf], [2 2]);
surf(double(subsetdata));
```

Tutorials

- "Import NetCDF Files and OPeNDAP Data"

See Also

`ncdisp` | `ncinfo` | `netcdf` | `ncwrite` | `ncreadatt`

Topics

"Import NetCDF Files and OPeNDAP Data"

Introduced in R2011a

ncreadatt

Read attribute value from NetCDF data source

Syntax

```
attvalue = ncreadatt(source,location,attname)
```

Description

`attvalue = ncreadatt(source,location,attname)` reads the attribute `attname` from the group or variable specified by `location` in `source`, where source is the name of a NetCDF file or the URL of a NetCDF data source.

Input Arguments

source

Character vector specifying the name of a NetCDF file or the URL of an OPeNDAP NetCDF data source.

location

Character vector specifying a group or variable in the NetCDF data source. To read global attributes, set `location` to `'/'` (forward slash).

attname

Character vector specifying the name of an attribute that you want to read in the NetCDF data source.

Output Arguments

attvalue

Data associated with the attribute.

Examples

Read Global Attribute

```
creation_date = ncreadatt('example.nc','/','creation_date')
```

```
creation_date =
'29-Mar-2010'
```

Read Attribute Associated with Variable

Read an attribute associated with a variable.

```
scale_factor = ncreadatt('example.nc','temperature','scale_factor')
```

```
scale_factor = 1.8000
```

Read Attribute Associated with Group

Read an attribute associated with a group. This example applies to netcdf4 format files only.

```
desc_value = ncreadatt('example.nc','/grid2','description')
```

```
desc_value =
'This is another group attribute.'
```

Tutorials

- "Import NetCDF Files and OPeNDAP Data"

See Also

`ncdisp` | `ncinfo` | `ncread` | `netcdf` | `ncwriteatt`

Topics

"Import NetCDF Files and OPeNDAP Data"

Introduced in R2011a

ncwrite

Write data to NetCDF file

Syntax

```
ncwrite(filename,varname,vardata)
ncwrite(filename,varname,vardata,start,stride)
```

Description

`ncwrite(filename,varname,vardata)` writes the numerical or char data in `vardata` to an existing variable `varname` in the NetCDF file `filename`. `ncwrite` writes the data in `vardata` starting at the beginning of the variable and extends unlimited dimensions automatically, if needed.

If the NetCDF file or the variable do not exist, use `nccreate` to create them first.

`ncwrite(filename,varname,vardata,start,stride)` writes `vardata` to an existing variable `varname` in file `filename` beginning at the location given by `start`. `stride` is an optional argument that specifies the inter-element spacing of the data written. Use this syntax to append data to an existing variable or write partial data.

Input Arguments

`filename`

Character vector specifying the name of a NetCDF file. If the file does not exist, use `nccreate` to create it first.

Default:

`varname`

Character vector specifying the name of a variable in a NetCDF file. If the variable does not exist, use `nccreate` to create it first.

vardata

Data to write to the variable in the NetCDF file.

Note: For variable values containing text data, the `vardata` input must have only ASCII encoded characters.

---

start

For an *N*-dimensional variable, `start` is a vector of indices of length *N* specifying the starting location. Indices are 1-based.

stride

(Optional) Vector of length *N*, specifying the inter-element spacing.

Default: Vector of ones

Examples

Create a new `netcdf4_classic` file, and write a scalar variable with no dimensions. Add the creation time as a global attribute.

```
nccreate('myfile.nc','pi');
ncwrite('myfile.nc','pi',3.1);
ncwriteatt('myfile.nc','/','creation_time',datestr(now));
% overwrite existing data
ncwrite('myfile.nc','pi',3.1416);
ncdisp('myfile.nc');
```

Create a `netcdf4_classic` file with a variable defined on an unlimited dimension. Write data incrementally to the variable.

```
nccreate('myncfile.nc','vmark',...
         'Dimensions', {'time', inf, 'cols', 6},...
         'ChunkSize',  [3 3],...
         'DeflateLevel', 2);
ncwrite('myncfile.nc','vmark', eye(3),[1 1]);
varData = ncread('myncfile.nc','vmark');
disp(varData);
```

```
ncwrite('myncfile.nc','vmark',fliplr(eye(3)),[1 4]);
varData = ncread('myncfile.nc','vmark');
disp(varData);
```

Tutorials

- "Export to NetCDF Files"

Tips

- If the variable `varname` already exists, `ncwrite` expects the datatype of `vardata` to match the NetCDF variable data type.
- If the variable `varname` has a `_FillValue`, `scale_factor` or `add_offset` attribute, `ncwrite` expects data in `double` format and casts `vardata` to the NetCDF data type, after applying the following attribute conventions in sequence:

  1. Subtract the value of' the`add_offset` attribute from `vardata`.
  2. Divide `vardata` by the value of the `scale_factor` attribute.
  3. Replace `NaN`s in `vardata` by the value of the `_FillValue` attribute. If this attribute does not exist, `ncwrite` tries to use the fill value for this variable as reported by the NetCDF library.

See Also

`ncdisp` | `ncread` | `ncinfo` | `netcdf` | `ncwriteatt` | `nccreate`

Topics

"Export to NetCDF Files"

Introduced in R2011a

ncwriteatt

Write attribute to NetCDF file

Syntax

```
ncwriteatt(filename,location,attname,attvalue)
```

Description

`ncwriteatt(filename,location,attname,attvalue)` creates or modifies the attribute specified by `attname` in the group or variable specified by `location`, in the NetCDF file specified by `filename`. `attvalue` can be a numeric vector or a character vector.

Input Arguments

`filename`

Character vector specifying the name of a NetCDF file

`location`

Character vector specifying a group or variable in the NetCDF file. To write global attributes, set `location` to `'/'` (forward slash).

`attname`

Character vector specifying the name of an existing attribute in a NetCDF file or the name of the attribute that you want to create.

`attvalue`

Numeric vector or a character vector.

Examples

Create a global attribute.

```
copyfile(which('example.nc'),'myfile.nc');
fileattrib('myfile.nc','+w');
ncdisp('myfile.nc');
ncwriteatt('myfile.nc','/','creation_date',datestr(now));
ncdisp('myfile.nc');
```

Modify an existing attribute.

```
copyfile(which('example.nc'),'myfile.nc');
fileattrib('myfile.nc','+w');
ncdisp('myfile.nc','peaks');
ncwriteatt('myfile.nc','peaks','description','Output of PEAKS');
ncdisp('myfile.nc','peaks');
```

Tutorials

- "Export to NetCDF Files"

See Also

`ncdisp` | `ncreadatt` | `ncwrite` | `ncread` | `nccreate` | `netcdf`

Topics

"Export to NetCDF Files"

Introduced in R2011a

ncwriteschema

Add NetCDF schema definitions to NetCDF file

Syntax

```
ncwriteschema(filename,schema)
```

Description

`ncwriteschema(filename,schema)` creates or adds attributes, dimensions, variable definitions and group structure defined in `schema` to the file `filename`.

Use `ncwriteschema` in combination with `ncinfo` to create a new NetCDF file based on the schema of an existing file. You can also use `ncwriteschema` to add variable definitions, attributes, dimensions, or group structure to an existing file.

Note: `ncwriteschema` does not write variable data. Use `ncwrite` to write data to the created variables. Created unlimited dimensions will have an initial size of 0 until you write data.

Note: `ncwriteschema` cannot change the format of an existing file. It cannot redefine existing variables and dimensions in `filename`. If your schema contains attributes, dimensions, variable definitions, or a group structure that already exist in the file, `writeschema` issues a warning but continues processing.

Input Arguments

`filename`

Character vector containing the name of a NetCDF file. If `filename` does not exist, `ncwriteschema` creates a new file using the `netcdf4_classic` format, unless the `Format` field in `schema` specifies another format.

Default:

schema

A structure, or array of structures, representing either a dimension, variable, an entire NetCDF file, or a `netcdf4` group. A group or file schema can contain a dimension or variable schema, or both. You can use the output returned by `ncinfo` as a `schema` structure. The following table lists the fields in the various types of schema structures. Optional fields are marked with asterisk (*).

Schema Type	Structure Field	Description
Group/File Schema	`Name`	Character vector identifying the group name. Use `'/'` to indicate the entire file.
	`Dimensions*`	Dimension schema
	`Variables*`	Variable schema
	`Attributes*`	Structure array of group/global attributes with Name and Value fields
	`Format*`	Character vector identifying a NetCDF file format
Dimension schema	`Name`	Character vector identifying the dimension
	`Length`	Length of the dimension. Can be `Inf`.
	`Unlimited*`	Boolean flag indicating if the dimension is unlimited
	`Format*`	Character vector identifying a NetCDF file format
Variable schema	`Name`	Character vector identifying a variable name
	`Dimensions`	Variable's dimension schema
	`Datatype`	Character vector identifying a MATLAB datatype
	`Attributes*`	Structure array of variable attributes with Name and Value fields
	`ChunkSize*`	Numeric value specifying chunk size of the variable
	`FillValue*`	Character or numeric fill value

Schema Type	Structure Field	Description
	`DeflateValue*`	Deflate compression level
	`Shuffle*`	Boolean flag to turn on the Shuffle filter
	`Format*`	Character vector identifying a NetCDF file format

Default:

Examples

Create a classic format file with two dimension definitions.

```
mySchema.Name   = '/';
mySchema.Format = 'classic';
mySchema.Dimensions(1).Name   = 'time';
mySchema.Dimensions(1).Length = Inf;
mySchema.Dimensions(2).Name   = 'rows';
mySchema.Dimensions(2).Length = 10;
ncwriteschema('emptyFile.nc', mySchema);
ncdisp('emptyFile.nc');
```

Create a `netcdf4_classic` format file to store a single variable from an existing file. First use `ncinfo` to get the schema of the peaks variable from the file. Then use `ncwriteschema` to create a NetCDF file, defining the peaks variable. Use `ncread` to get the data associated with the peaks variable and then use `ncwrite` to write the data to the variable in the new NetCDF file.

```
myVarSchema = ncinfo('example.nc','peaks');
ncwriteschema('peaksFile.nc',myVarSchema);
peaksData   = ncread('example.nc','peaks');
ncwrite('peaksFile.nc','peaks',peaksData);
ncdisp('peaksFile.nc');
```

Tutorials

- "Export to NetCDF Files"

See Also

`ncdisp` | `ncinfo` | `ncwrite` | `ncread` | `netcdf`

Topics

"Export to NetCDF Files"

Introduced in R2011a

netcdf

Interact directly with NetCDF Library

Description

Functions in the MATLAB `netcdf` package provide interfaces to dozens of functions in the NetCDF library. The MATLAB functions enable reading data from and writing data to NetCDF files (known as *data sets* in NetCDF terminology). To use these functions, you should be familiar with the NetCDF C Interface.

MATLAB supports NetCDF version 4.3.3.1.

In most cases, the syntax of the MATLAB function matches the syntax of the NetCDF library function. The functions are implemented as a package called `netcdf`. To use these functions, prefix the function name with the package name, `netcdf`. For example, to call the NetCDF library routine used to open existing NetCDF files, use the following MATLAB syntax:

```
ncid = netcdf.open(ncfile,mode);
```

For copyright information, see the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

Note: For information about MATLAB support for the Common Data Format (CDF), which is a completely separate and incompatible format, see `cdflib`.

Library Functions

netcdf.getChunkCache	Retrieve chunk cache settings for NetCDF library
netcdf.inqLibVers	Return NetCDF library version information
netcdf.setChunkCache	Set default chunk cache settings for NetCDF library
netcdf.setDefaultFormat	Change default netCDF file format

File Operations

netcdf.abort	Revert recent netCDF file definitions
netcdf.close	Close netCDF file
netcdf.create	Create new NetCDF dataset
netcdf.endDef	End netCDF file define mode
netcdf.inq	Return information about netCDF file
netcdf.inqFormat	Determine format of NetCDF file
netcdf.inqGrps	Retrieve array of child group IDs
netcdf.inqUnlimDims	Return list of unlimited dimensions in group
netcdf.open	Open NetCDF data source
netcdf.reDef	Put open netCDF file into define mode
netcdf.setFill	Set netCDF fill mode
netcdf.sync	Synchronize netCDF file to disk

Dimensions

netcdf.defDim	Create netCDF dimension
netcdf.inqDim	Return netCDF dimension name and length
netcdf.inqDimID	Return dimension ID
netcdf.renameDim	Change name of netCDF dimension

Groups

netcdf.defGrp	Create group in NetCDF file
netcdf.inqDimIDs	Retrieve list of dimension identifiers in group
netcdf.inqGrpName	Retrieve name of group
netcdf.inqGrpNameFull	Complete pathname of group
netcdf.inqGrpParent	Retrieve ID of parent group.

netcdf.inqNcid	Return ID of named group
netcdf.inqVarIDs	IDs of all variables in group

Variables

netcdf.defVar	Create NetCDF variable
netcdf.defVarChunking	Define chunking behavior for NetCDF variable
netcdf.defVarDeflate	Define compression parameters for NetCDF variable
netcdf.defVarFill	Define fill parameters for NetCDF variable
netcdf.defVarFletcher32	Define checksum parameters for NetCDF variable
netcdf.getVar	Read data from NetCDF variable
netcdf.inqVarChunking	Determine chunking settings for NetCDF variable
netcdf.inqVarDeflate	Determine compression settings for NetCDF variable
netcdf.inqVarFill	Determine values of fill parameters for NetCDF variable
netcdf.inqVarFletcher32	Fletcher32 checksum setting for NetCDF variable
netcdf.inqVar	Information about variable
netcdf.inqVarID	Return ID associated with variable name
netcdf.putVar	Write data to netCDF variable
netcdf.renameVar	Change name of netCDF variable

Attributes

netcdf.copyAtt	Copy attribute to new location
netcdf.delAtt	Delete netCDF attribute
netcdf.getAtt	Return netCDF attribute
netcdf.inqAtt	Return information about netCDF attribute

netcdf.inqAttID	Return ID of netCDF attribute
netcdf.inqAttName	Return name of netCDF attribute
netcdf.putAtt	Write netCDF attribute
netcdf.renameAtt	Change name of attribute

Utilities

netcdf.getConstant	Return numeric value of named constant
netcdf.getConstantNames	Return list of constants known to netCDF library

netcdf.abort

Revert recent netCDF file definitions

Syntax

```
netcdf.abort(ncid)
```

Description

`netcdf.abort(ncid)` reverts a netCDF file to its previous state, backing out any definitions made since the file last entered define mode. A file enters define mode when you create it (using `netcdf.create`) or when you explicitly enter define mode (using `netcdf.redef`). Once you leave define mode (using `netcdf.endDef`), you cannot revert the definitions you made while in define mode. `ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`. A call to `netcdf.abort` closes the file.

This function corresponds to the `nc_abort` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example creates a new file, performs an operation on the file, and then reverts the file back to its original state. To run this example, you must have write permission in your current directory.

```
% Create a netCDF file
ncid = netcdf.create('foo.nc','NC_NOCLOBBER');

% Perform an operation, such as defining a dimension.
dimid = netcdf.defDim(ncid, 'lat', 50);

% Revert the file back to its previous state.
netcdf.abort(ncid)

% Verify that the file is now closed.
```

```
dimid = netcdf.defDim(ncid, 'lat', 50); % should fail
??? Error using ==> netcdflib
NetCDF: Not a valid ID

Error in ==> defDim at 22
dimid = netcdflib('def_dim', ncid,dimname,dimlen);
```

See Also

netcdf.create | netcdf.endDef | netcdf.reDef

netcdf.close

Close netCDF file

Syntax

```
netcdf.close(ncid)
```

Description

`netcdf.close(ncid)` terminates access to the netCDF file identified by `ncid`.

`ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

This function corresponds to the `nc_close` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example creates a new netCDF file, and then closes the file. You must have write permission in your current directory to run this example.

```
ncid = netcdf.open('foo.nc','NC_WRITE')
```

```
netcdf.close(ncid)
```

See Also

`netcdf.create` | `netCDF.open`

netcdf.copyAtt

Copy attribute to new location

Syntax

```
netcdf.copyAtt(ncid_in,varid_in,attname,ncid_out,varid_out)
```

Description

`netcdf.copyAtt(ncid_in,varid_in,attname,ncid_out,varid_out)` copies an attribute from one variable to another, possibly across files. `ncid_in` and `ncid_out` are netCDF file identifiers returned by `netcdf.create` or `netcdf.open`. `varid_in` identifies the variable with an attribute that you want to copy. `varid_out` identifies the variable to which you want to associate a copy of the attribute.

This function corresponds to the `nc_copy_att` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example makes a copy of the attribute associated with the first variable in the netCDF example file, `example.nc`, in a new file. To run this example, you must have write permission in your current directory.

```
% Open example file.
ncid = netcdf.open('example.nc','NC_NOWRITE');

% Get identifier for a variable in the file.
varid = netcdf.inqVarID(ncid,'avagadros_number');

% Create new netCDF file.
ncid2 = netcdf.create('foo.nc','NC_NOCLOBBER');

% Define a dimension in the new file.
dimid2 = netcdf.defDim(ncid2,'x',50);
```

```
% Define a variable in the new file.
varid2 = netcdf.defVar(ncid2,'myvar','double',dimid2);

% Copy the attribute named 'description' into the new file,
% associating the attribute with the new variable.
netcdf.copyAtt(ncid,varid,'description',ncid2,varid2);
%
% Check the name of the attribute in new file.
attname = netcdf.inqAttName(ncid2,varid2,0)

attname =

description
```

See Also

netcdf.inqAtt | netcdf.inqAttID | netcdf.inqAttName | netcdf.putAtt | netcdf.renameAtt

netcdf.create

Create new NetCDF dataset

Syntax

```
ncid = netcdf.create(filename,cmode)
[chunksize_out,ncid] =
netcdf.create(filename,cmode,initsz,chunksize)
```

Description

`ncid = netcdf.create(filename,cmode)` creates a new NetCDF file according to the file creation mode. The return value `ncid` is a file ID. The `cmode` parameter determines the type of file access. Specify `cmode` as one of these character vectors.

Value of `cmode`	Description
`'NOCLOBBER'`	Prevent overwriting of existing file with the same name.
`'CLOBBER'`	Overwrite any existing file with the same name.
`'SHARE'`	Allow synchronous file updates.
`'64BIT_OFFSET'`	Allow easier creation of files and variables which are larger than two gigabytes.
`'NETCDF4'`	Create a NetCDF-4/HDF5 file
`'CLASSIC_MODEL'`	Enforce the classic model; has no effect unless used in a bitwise-or with `NETCDF4`

Note: You can specify the mode as a numeric value, retrieved using the `netcdf.getConstant` function. To specify more than one mode, use a bitwise-OR of the numeric values of the modes.

`[chunksize_out,ncid] = netcdf.create(filename,cmode,initsz,chunksize)` creates a new NetCDF file, but with additional performance tuning parameters. `initsz` sets the initial size of the

file. `chunksize` can affect I/O performance. The actual value chosen by the NetCDF library might not correspond to the input value.

This function corresponds to the `nc_create` and `nc__create` functions in the NetCDF library C API. To use this function, you should be familiar with the NetCDF programming paradigm. See `netcdf` for more information.

Examples

Create NetCDF File Without Overwriting Existing File

Create a NetCDF dataset named `foo.nc`, only if no other file with the same name exists in the current directory. To run this example, you must have write permission in your current directory.

```
ncid = netcdf.create('foo.nc','NOCLOBBER')
```

```
ncid = 65536
```

`netcdf.create` returns a file identifier.

Close the file

```
netcdf.close(ncid)
```

Create NetCDF-4 File Using Classic Model

Get the numeric values corresponding to the `NETCDF4` and `CLASSIC_MODEL` constants defined by the NetCDF library. Use a bitwise-OR of the numeric values to specify more than one creation mode.

```
cmode = netcdf.getConstant('NETCDF4');
cmode = bitor(cmode,netcdf.getConstant('CLASSIC_MODEL'));
```

Create a NetCDF-4 file that uses the classic model by specifying the creation mode value, `cmode`.

```
ncid = netcdf.create('myfile.nc',cmode);
```

Close the file.

```
netcdf.close(ncid);
```

See Also

`netcdf.getConstant` | `netcdf.open`

netcdf.defDim

Create netCDF dimension

Syntax

```
dimid = netcdf.defDim(ncid,dimname,dimlen)
```

Description

`dimid = netcdf.defDim(ncid,dimname,dimlen)` creates a new dimension in the netCDF file specified by `ncid`, where `dimname` is a character vector that specifies the name of the dimension and `dimlen` is a numeric value that specifies its length. To define an unlimited dimension, specify the predefined constant `'NC_UNLIMITED'` for `dimlen`, using `netcdf.getConstant` to retrieve the value.

`netcdf.defDim` returns `dimid`, a numeric ID corresponding to the new dimension.

This function corresponds to the `nc_def_dim` function in the netCDF library C API.To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

Examples

Create a new file and define two dimensions in the file. One dimension is an unlimited dimension. To run this example, you must have write permission in your current folder.

```
% Create a netCDF file.
ncid = netcdf.create('foo.nc','NC_NOCLOBBER')

% Define a dimension.
lat_dimID = netcdf.defDim(ncid,'latitude',360);

% Define an unlimited dimension.
```

```
long_dimID = netcdf.defDim(ncid,'longitude',...
  netcdf.getConstant('NC_UNLIMITED'));
```

See Also

netcdf.getConstant

netcdf.defGrp

Create group in NetCDF file

Syntax

```
childGrpID = netcdf.defGrp(parentGroupId,childGroupName)
```

Description

`childGrpID = netcdf.defGrp(parentGroupId,childGroupName)` creates a child group with the name specified by `childGroupName`, that is the child of the parent group specified by `parentGroupId`

Input Arguments

`parentGroupId`

Identifier of NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

`childGroupName`

Character vector specifying the name that you want to assign to the group.

Default:

Output Arguments

`childGrpID`

Identifier of a NetCDF group.

Examples

This example creates a NetCDF dataset and then defines a group.

```
ncid = netcdf.create('myfile.nc','netcdf4');
childGroupId = netcdf.defGrp(ncid,'mygroup');
netcdf.close(ncid);
```

References

This function corresponds to the `nc_def_grp` function in the NetCDF library C API.

For copyright information, read the files `netcdfcopyright.txt` and `mexnccopyright.txt`.

See Also

`netcdf` | `netcdf.inqGrps`

netcdf.defVar

Create NetCDF variable

Syntax

```
varid = netcdf.defVar(ncid,varname,xtype,dimids)
```

Description

`varid = netcdf.defVar(ncid,varname,xtype,dimids)` creates a new variable in the dataset identified by `ncid`.

`varname` is a character vector that specifies the name of the variable.

`xtype` specifies the NetCDF data type of the variable, using one of these values.

Value of `xtype`	MATLAB Class
`'NC_BYTE'`	`int8` or `uint8`[a]
`'NC_CHAR'`	`char`
`'NC_SHORT'`	`int16`
`'NC_INT'`	`int32`
`'NC_FLOAT'`	`single`
`'NC_DOUBLE'`	`double`

a. NetCDF interprets byte data as either signed or unsigned.

Alternatively, `xtype` can be the numeric equivalent returned by the `netcdf.getConstant` function.

`dimids` specifies a list of dimension IDs.

`netcdf.defVar` returns `varid`, a numeric identifier for the new variable.

This function corresponds to the `nc_def_var` function in the NetCDF library C API. Because MATLAB uses FORTRAN-style ordering, the fastest-varying dimension comes

first and the slowest comes last. Any unlimited dimension is therefore last in the list of dimension IDs. This ordering is the reverse of that found in the C API.To use this function, you should be familiar with the NetCDF programming paradigm. See `netcdf` for more information.

Examples

Define Dimension and Variable in NetCDF File

Create a new NetCDF file, define a dimension in the file, and then define a variable on that dimension. In NetCDF files, you must create a dimension before you can create a variable. To run this example, you must have write permission in your current folder.

Create a new NetCDF file named `foo.nc`.

```
ncid = netcdf.create('foo.nc','NC_NOCLOBBER');
```

Define a dimension in the new file.

```
dimid = netcdf.defDim(ncid,'x',50);
```

Define a variable in the new file using `netcdf.defVar`.

```
varid = netcdf.defVar(ncid,'myvar','double',dimid)
```

```
varid = 0
```

`netcdf.defVar` returns a numeric identifier for the new variable.

Close the file.

```
netcdf.close(ncid)
```

See Also

`netCDF.getConstant` | `netCDF.inqVar` | `netCDF.putVar`

netcdf.defVarChunking

Define chunking behavior for NetCDF variable

Syntax

```
netcdf.defVarChunking(ncid,varid,storage,chunkDims)
```

Description

`netcdf.defVarChunking(ncid,varid,storage,chunkDims)`. sets the chunk settings for the variable specified by `varid`. Chunking is a technique to improve performance. `storage` specifies the type of chunking to use and `chunkDims` specifies the extents of the chunk size. You must specify the chunk size used with a variable after creating the variable but before you write data to the variable.

You cannot specify the chunk size for variables in a NetCDF file created with the netCDF-3 mode (`CLASSIC_MODEL`).

Input Arguments

ncid

Identifier of NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

varid

Identifier of a NetCDF variable, returned by `netcdf.defVar`.

Default:

storage

Character vector specifying whether NetCDF should break the variable into chunks when writing to a file. If set to `'CHUNKED'`, NetCDF breaks the variable into chunks; if set to `'CONTIGUOUS'`, NetCDF does not break the data into chunks.

Default:

`chunkDims`

Array specifying the dimensions of the chunk.

Because MATLAB uses FORTRAN-style ordering, the order of dimensions in `chunkdims` is reversed relative to what would be in the C API.

If storage is `CONTIGUOUS`, you can omit `chunkDims`.

Default: Chunk size determined by the NetCDF library.

Examples

This example creates a NetCDF file and specifies the chunking behavior of a variable.

```
ncid = netcdf.create('myfile.nc','NETCDF4');
latdimid = netcdf.defDim(ncid,'lat',1800);
londimid = netcdf.defDim(ncid,'col',3600);
varid = netcdf.defVar(ncid,'earthgrid','double',[latdimid londimid]);
netcdf.defVarChunking(ncid,varid,'CHUNKED',[180 360]);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_def_var_chunking` function in the NetCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.inqVarChunking`

netcdf.defVarDeflate

Define compression parameters for NetCDF variable

Syntax

```
netcdf.defVarDeflate(ncid,varid,shuffle,deflate,deflateLevel)
```

Description

`netcdf.defVarDeflate(ncid,varid,shuffle,deflate,deflateLevel)` sets the compression parameters for the NetCDF variable specified by `varid` in the location specified by `ncid`.

Input Arguments

`ncid`

Identifier of NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

`varid`

Identifier of a NetCDF variable, returned by `netcdf.defVar`.

Default:

`shuffle`

Boolean value. To turn on the shuffle filter, set this argument to `true`. The shuffle filter can assist with the compression of integer data by changing the byte order in the data stream.

Default:

deflate

Boolean value. To turn on compression, set this argument to `true` and set the `deflateLevel` argument to the desired compression level.

Default:

deflateLevel

Numeric value between `0` and `9` specifying the amount of compression, where `0` is no compression and `9` is the most compression.

Default:

Examples

This example create a variable with dimensions [1800 3600] and a compression level of 5. This results in a chunked layout that is a 10-by-10 grid.

```
ncid = netcdf.create('myfile.nc','NETCDF4');
latdimid = netcdf.defDim(ncid,'lat',1800);
londimid = netcdf.defDim(ncid,'col',3600);
varid = netcdf.defVar(ncid,'earthgrid','double',[latdimid londimid]);
netcdf.defVarDeflate(ncid,varid,true,true,5);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_def_var_deflate` function in the netCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.inqVarDeflate`

netcdf.defVarFill

Define fill parameters for NetCDF variable

Syntax

```
netcdf.defVarFill(ncid,varid,noFillMode,fillValue)
```

Description

`netcdf.defVarFill(ncid,varid,noFillMode,fillValue)` sets the fill parameters for a variable in a NetCDF-4 file. `varid` identifies the variable and the `ncid` identifies the NetCDF-4 file.

For netCDF files, you can only specify fill values when the NetCDF is in definition mode (before calling `netcdf.endDef`). For NetCDF files in classic and 64-bit offset modes, you can turn no-fill mode on and off at any time.

Input Arguments

`ncid`

Identifier of a NetCDF-4 file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

`varid`

Identifier of a NetCDF variable, returned by `netcdf.defVar`.

Default:

`noFillMode`

Boolean value. When set to `true`, turns off use of fill values for the variable, which can be helpful in high performance applications. When `true`, `netcdf.defVarFill` ignores the value of the `fillValue` argument. To use the fill value, set this to `false`.

Default:

`fillValue`

Specifies the value to use in the variable when no other value is specified. The data type must be the same data type as the variable.

Default:

Examples

This example creates a NetCDF-4 file and defines a fill value for a variable.

```
ncid = netcdf.create('myfile.nc','NETCDF4');
dimid = netcdf.defDim(ncid,'latitude',180);
varid = netcdf.defVar(ncid,'latitude','double',dimid);
netcdf.defVarFill(ncid,varid,false,-999);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_def_var_fill` function in the NetCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.setFill` | `netcdf.inqVarFill`

netcdf.defVarFletcher32

Define checksum parameters for NetCDF variable

Syntax

```
netcdf.defVarFletcher32(ncid,varid,setting)
```

Description

`netcdf.defVarFletcher32(ncid,varid,setting)` defines the checksum settings for the NetCDF variable specified by `varid` in the file specified by `ncid`.

Input Arguments

`ncid`

Identifier of NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

`varid`

Identifier of a NetCDF variable, returned by `netcdf.defVar`.

Default:

`setting`

Character vector specifying whether Fletcher32 checksum error detection is used with the variable. To turn on Fletcher32 checksum, specify the value `FLETCHER32`. To turn off the use of checksum error detection, specify the value `NOCHECKSUM`.

Default:

Examples

This example creates a NetCDF dataset and turns on the Fletcher32 checksum for a variable.

```
ncid = netcdf.create('myfile.nc','NETCDF4');
latdimid = netcdf.defDim(ncid,'lat',1800);
londimid = netcdf.defDim(ncid,'col',3600);
varid = netcdf.defVar(ncid,'earthgrid','double',[latdimid londimid]);
netcdf.defVarFletcher32(ncid,varid,'FLETCHER32');
netcdf.close(ncid);
```

References

This function corresponds to the `nc_def_var_fletcher32` function in the NetCDF library C API.

For copyright information, read the files `netcdfcopyright.txt` and `mexnccopyright.txt`.

See Also

`netcdf` | `netcdf.inqVarFletcher32`

netcdf.delAtt

Delete netCDF attribute

Syntax

```
netcdf.delAtt(ncid,varid,attName)
```

Description

`netcdf.delAtt(ncid,varid,attName)` deletes the attribute identified by the character vector `attName`.

`ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

`varid` is a numeric value that identifies the variable. To delete a global attribute, use `netcdf.getConstant('GLOBAL')` for the `varid`. You must be in define mode to delete an attribute.

This function corresponds to the `nc_del_att` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example opens a local copy of the example netCDF file included with MATLAB, `example.nc`.

```
% Open a netCDF file.
ncid = netcdf.open('my_example.nc','NC_WRITE')

% Determine number of global attributes in file.
[numdims numvars numatts unlimdimID] = netcdf.inq(ncid);

numatts =

   1
```

```
% Get name of attribute; it is needed for deletion.
attname = netcdf.inqAttName(ncid,netcdf.getConstant('NC_GLOBAL'),0)

% Put file in define mode to delete an attribute.
netcdf.reDef(ncid);

% Delete the global attribute in the netCDF file.
netcdf.delAtt(ncid,netcdf.getConstant('GLOBAL'),attname);

% Verify that the global attribute was deleted.
[numdims numvars numatts unlimdimID] = netcdf.inq(ncid);

numatts =

   0
```

See Also

netcdf.getConstant | netcdf.inqAttName

netcdf.endDef

End netCDF file define mode

Syntax

```
netcdf.endDef(ncid)
netcdf.endDef(ncid,h_minfree,v_align,v_minfree,r_align)
```

Description

`netcdf.endDef(ncid)` takes a netCDF file out of define mode and into data mode. `ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

`netcdf.endDef(ncid,h_minfree,v_align,v_minfree,r_align)` takes a netCDF file out of define mode, specifying four additional performance tuning parameters. For example, one reason for using the performance parameters is to reserve extra space in the netCDF file header using the `h_minfree` parameter:

```
ncid = netcdf.endDef(ncid,20000,4,0,4);
```

This reserves 20,000 bytes in the header, which can be used later when adding attributes. This can be extremely efficient when working with very large netCDF 3 files. To understand how to use these performance tuning parameters, see the netCDF library documentation.

This function corresponds to the `nc_enddef` and `nc__enddef` functions in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

Take File out of Define Mode

When you create a file using `netcdf.create`, the functions opens the file in define mode. This example uses `netcdf.endDef` to take the file out of define mode.

Create a netCDF file.

```
ncid = netcdf.create('foo.c','NC_NOCLOBBER');
```

Define a dimension.

```
dimid = netcdf.defDim(ncid,'lat',50);
```

Leave define mode.

```
netcdf.endDef(ncid)
```

Making a change, when not in define mode, will return an error. For this example the define mode was ended, using the `netcdf.endDef` function, therefore typing `dimid = netcdf.defDim(ncid,'lon',50)` in the command window should return an error.

See Also

`netcdf.create` | `netcdf.reDef`

netcdf.getAtt

Return netCDF attribute

Syntax

```
attrvalue = netcdf.getAtt(ncid,varid,attname)
attrvalue = netcdf.getAtt(ncid,varid,attname,output_datatype)
```

Description

`attrvalue = netcdf.getAtt(ncid,varid,attname)` returns `attrvalue`, the value of the attribute name contained in `attname`. Specify `attname` as a character vector. When it chooses the data type of `attrvalue`, MATLAB attempts to match the netCDF class of the attribute. For example, if the attribute has the netCDF data type `NC_INT`, MATLAB uses the `int32` class for the output data. If an attribute has the netCDF data type `NC_BYTE`, the class of the output data is `int8` value.

`attrvalue = netcdf.getAtt(ncid,varid,attname,output_datatype)` returns `attrvalue`, the value of the attribute name specified by `attname`, using the output class specified by `output_datatype`. Specify the output data type using one of these values.

'int'	'double'	'int16'
'short'	'single'	'int8'
'float'	'int32'	'uint8'

This function corresponds to several attribute I/O functions in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example opens the example netCDF file included with MATLAB, `example.nc`, and gets the value of the attribute associated with the first variable. The example also gets the value of the global variable in the file.

```
% Open a netCDF file.
ncid = netcdf.open('example.nc','NC_NOWRITE');

% Get name of first variable.
[varname vartype vardimIDs varatts] = netcdf.inqVar(ncid,0);

% Get ID of variable, given its name.
varid = netcdf.inqVarID(ncid,varname);

% Get attribute name, given variable id.
attname = netcdf.inqAttName(ncid,varid,0);

% Get value of attribute.
attval = netcdf.getAtt(ncid,varid,attname);

% Get name of global attribute
gattname = netcdf.inqAttName(ncid,netcdf.getConstant('NC_GLOBAL'),0);

% Get value of global attribute.
gattval = netcdf.getAtt(ncid,netcdf.getConstant('NC_GLOBAL'),gattname)

gattval =

09-Jun-2008
```

See Also

netcdf.inqAtt | netcdf.putAtt

netcdf.getChunkCache

Retrieve chunk cache settings for NetCDF library

Syntax

```
[csize, nelems, premp] = netcdf.getChunkCache()
```

Description

`[csize, nelems, premp] = netcdf.getChunkCache()` returns the default chunk cache settings.

Output Arguments

`csize`

Scalar double specifying the total size of the raw data chunk cache in bytes.

`nelems`

Scalar double specifying the number of chunk slots in the raw data chunk cache hash table.

`premp`

Double, between 0 and 1, inclusive, that specifies how the library handles preempting fully read chunks in the chunk cache. A value of zero means fully read chunks are treated no differently than other chunks, that is, preemption occurs solely based on the Least Recently Used (LRU) algorithm. A value of 1 means fully read chunks are always preempted before other chunks.

Examples

Determine information about the chunk cache size used by the NetCDF library.

```
[csize, nelems, premp] = netcdf.getChunkCache();
```

References

This function corresponds to the `nc_get_chunk_cache` function in the NetCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.setChunkCache`

netcdf.getConstant

Return numeric value of named constant

Syntax

```
val = netcdf.getConstant(param_name)
```

Description

`val = netcdf.getConstant(param_name)` returns the numeric value corresponding to the name of a constant defined by the netCDF library. For example, `netcdf.getConstant('NC_NOCLOBBER')` returns the numeric value corresponding to the netCDF constant `NC_NOCLOBBER`.

The value for `param_name` can be either upper- or lowercase, and does not need to include the leading three characters `'NC_'`. To retrieve a list of all the names defined by the netCDF library, use the `netcdf.getConstantNames` function.

This function has no direct equivalent in the netCDF C interface. To find out more about NetCDF, see `netcdf`.

Examples

This example opens the example netCDF file included with MATLAB, `example.nc`.

```
% Open example file.
ncid = netcdf.open('example.nc','NC_NOWRITE');

% Determine contents of the file.
[ndims nvars natts dimm] = netcdf.inq(ncid);

% Get name of global attribute.
% Note: You must use netcdf.getConstant to specify NC_GLOBAL.
attname = netcdf.inqattname(ncid,netcdf.getConstant('NC_GLOBAL'),0)

attname =
```

```
creation_date
```

See Also

netcdf.getConstantNames

netcdf.getConstantNames

Return list of constants known to netCDF library

Syntax

```
val = netcdf.getConstantNames(param_name)
```

Description

`val = netcdf.getConstantNames(param_name)` returns a list of names of netCDF library constants, definitions, and enumerations. When these names, returned as character vectors, are supplied as actual parameters to MATLAB netCDF package functions, the functions automatically convert the constant to the appropriate numeric value.

This MATLAB function has no direct equivalent in the netCDF C interface. To find out more about netCDF, see `netcdf`.

Examples

```
nc_constants = netcdf.getConstantNames

nc_constants =

    'NC2_ERR'
    'NC_64BIT_OFFSET'
    'NC_BYTE'
    'NC_CHAR'
    'NC_CLOBBER'
    'NC_DOUBLE'
    'NC_EBADDIM'
    'NC_EBADID'
    'NC_EBADNAME'
    'NC_EBADTYPE'
  ...
```

See Also

`netCDF.getConstantNames`

netcdf.getVar

Read data from NetCDF variable

Syntax

```
data = netcdf.getVar(ncid,varid)
data = netcdf.getVar(ncid,varid,start)
data = netcdf.getVar(ncid,varid,start,count)
data = netcdf.getVar(ncid,varid,start,count,stride)
data = netcdf.getVar( ___ ,output_type)
```

Description

`data = netcdf.getVar(ncid,varid)` returns `data`, the value of the variable specified by `varid`. MATLAB attempts to match the class of the output data to NetCDF class of the variable.

Note: For variable values containing text, the `netcdf.getVar` function supports reading only of `data` that is ASCII encoded.

`ncid` is a NetCDF file identifier returned by `netcdf.create` or `netcdf.open`.

`data = netcdf.getVar(ncid,varid,start)` returns a single value starting at the specified index, `start`.

`data = netcdf.getVar(ncid,varid,start,count)` returns a contiguous section of a variable. `start` specifies the starting point and `count` specifies the amount of data to return.

`data = netcdf.getVar(ncid,varid,start,count,stride)` returns a subset of a section of a variable. `start` specifies the starting point, `count` specifies the extent of the section, and `stride` specifies which values to return.

`data = netcdf.getVar( ___ ,output_type)` specifies the data type of the return value `data`. Specify the output data type as one of these character vectors.

'int8'
'uint8'
'int16'
'int32'
'single'
'double'

This function corresponds to several functions in the NetCDF library C API. To use this function, you should be familiar with the NetCDF programming paradigm. See `netcdf` for more information.

Examples

Read Value of Variable in NetCDF File

Open the example file, `example.nc`.

```
ncid = netcdf.open('example.nc','NC_NOWRITE');
```

Get the name of the first variable in the file.

```
varname = netcdf.inqVar(ncid,0)
```

```
varname =
'avagadros_number'
```

Get variable ID of the first variable, given its name.

```
varid = netcdf.inqVarID(ncid,varname)
```

```
varid = 0
```

Get the value of the variable. Use the variable ID as the second input to the `netcdf.getVar` function.

```
data = netcdf.getVar(ncid,varid)
```

```
data = 6.0221e+23
```

Display the data type of the output value.

```
whos data
```

```
  Name      Size            Bytes  Class     Attributes

  data      1x1                 8  double
```

Get the value of the `avogadros_number` variable again, specifying that the output data type should be `single`.

```
data = netcdf.getVar(ncid,varid,'single');
```

Display the data type of the output value.

```
whos data
```

```
  Name      Size            Bytes  Class     Attributes

  data      1x1                 4  single
```

Close the NetCDF file.

```
netcdf.close(ncid)
```

See Also

`netcdf.create` | `netcdf.inqVarID` | `netcdf.open`

netcdf.inq

Return information about netCDF file

Syntax

```
[ndims,nvars,ngatts,unlimdimid] = netcdf.inq(ncid)
```

Description

`[ndims,nvars,ngatts,unlimdimid] = netcdf.inq(ncid)` returns the number of dimensions, variables, and global attributes in a netCDF file. The function also returns the ID of the dimension defined with unlimited length, if one exists.

`ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`. You can call `netcdf.inq` in either define mode or data mode.

This function corresponds to the `nc_inq` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example opens the example netCDF file included with MATLAB, `example.nc`, and uses the `netcdf.inq` function to get information about the contents of the file.

```
% Open netCDF example file.
ncid = netcdf.open('example.nc','NC_NOWRITE')

% Get information about the contents of the file.
[numdims, numvars, numglobalatts, unlimdimID] = netcdf.inq(ncid)

numdims =

     4
```

```
numvars =

     4


numglobalatts =

     1


unlimdimID =

     3
```

See Also

netcdf.create | netcdf.open

netcdf.inqDimIDs

Retrieve list of dimension identifiers in group

Syntax

```
dimIDs = netcdf.inqDimIDs(ncid)
dimIDs = netcdf.inqDimIDs(ncid,includeParents)
```

Description

`dimIDs = netcdf.inqDimIDs(ncid)` returns a list of dimension identifiers in the group specified by `ncid`.

`dimIDs = netcdf.inqDimIDs(ncid,includeParents)` includes all dimensions in all parent groups if `includeParents` is `true`.

Input Arguments

ncid

Identifier of a NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

includeParents

Boolean value. If set to `true`, `netcdf.inqDimIDs` includes the dimensions of all parent groups.

Default: `false`

Output Arguments

dimIDs

Array of dimension IDs

Examples

This example opens the NetCDF sample file and gets the IDs of all the dimensions.

```
ncid = netcdf.open('example.nc','NOWRITE');
gid = netcdf.inqNcid(ncid,'grid1');
dimids = netcdf.inqDimIDs(gid);
dimids_all = netcdf.inqDimIDS(gid, true);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_dimids` function in the NetCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.inqVarIDs`

netcdf.inqFormat

Determine format of NetCDF file

Syntax

```
format = netcdf.inqFormat(ncid)
```

Description

`format = netcdf.inqFormat(ncid)` returns the format for the file specified by NetCDF file identifier, `ncid`.

Input Arguments

`ncid`

Identifier of a NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

Output Arguments

`format`

Character vector that specifies the format of the NetCDF file. Returned values include:

Format	Description
`'FORMAT_CLASSIC'`	Classic format — Original NetCDF format, used by all NetCDF files created between 1989 and 2004
`'FORMAT_64BIT'`	Classic format, 64–bit — Original format with 64–bit addressing capability to allow creation and access of much larger files.

Format	Description
'FORMAT_NETCDF4'	Enhanced model, HDF5-based — Introduced in 2008, NetCDF, version 4, extends the classic model and is based on HDF5.
'FORMAT_NETCDF4_CLASSIC'	Classic model, HDF5-based — Introduced in 2008, NetCDF, version 4, implements classic model but is based on HDF5.

Examples

This example opens the sample NetCDF file and determines the format.

```
ncid = netcdf.open('example.nc','NOWRITE');
fmt = netcdf.inqFormat(ncid)

format =

FORMAT_NETCDF4

netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_format` function in the NetCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf.getConstant` | `netcdf`

netcdf.inqGrpName

Retrieve name of group

Syntax

```
groupName = netcdf.inqGrpName(ncid)
```

Description

`groupName = netcdf.inqGrpName(ncid)` returns the name of a group specified by `ncid`.

Input Arguments

`ncid`

Identifier of NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

Output Arguments

`groupName`

Character vector containing the name of the group specified by `ncid`. The root group has the name `'/'`.

Examples

This example opens the NetCDF sample file and gets the names of groups in the dataset.

```
ncid = netcdf.open('example.nc','nowrite');
```

```
name = netcdf.inqGrpName(ncid);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_grpname` function in the NetCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.inqGrpNameFull`

netcdf.inqGrpNameFull

Complete pathname of group

Syntax

```
groupName = netcdf.inqGrpNameFull(ncid)
```

Description

`groupName = netcdf.inqGrpNameFull(ncid)` returns the complete pathname of the group specified by `ncid`.

Input Arguments

ncid

Identifier of NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

Output Arguments

groupName

Character vector specifying complete path of group.

The root group has the name `'/'`. The names of parent groups and child groups use the forward slash `'/'` separator, as in UNIX folder names, for example, `/group1/subgrp2/subsubgrp3`.

Examples

Open the NetCDF sample dataset and retrieve the names of all groups.

```
ncid = netcdf.open('example.nc','NOWRITE');
gid = netcdf.inqNcid(ncid,'grid2');
fullName = netcdf.inqGrpNameFull(gid);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_grpname_full` function in the netCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.inqGrpName`

netcdf.inqGrpParent

Retrieve ID of parent group.

Syntax

```
parentGroupID = netcdf.inqGrpParent(ncid)
```

Description

`parentGroupID = netcdf.inqGrpParent(ncid)` returns the ID of the parent group given the location of the child group, specified by `ncid`.

Input Arguments

`ncid`

Identifier of a NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

Output Arguments

`parentGroupID`

Identifier of the NetCDF group or file that is the parent of the specified file or group.

Examples

This example opens the NetCDF sample file and gets the full path of the parent of the specified group.

```
ncid = netcdf.open('example.nc','NOWRITE');
```

```
gid = netcdf.inqNcid(ncid,'grid2');
parentId = netcdf.inqGrpParent(gid);
fullName = netcdf.inqGrpNameFull(parentId);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_grp_parent` function in the NetCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.inqGrps`

netcdf.inqGrps

Retrieve array of child group IDs

Syntax

```
childGrps = netcdf.inqGrps(ncid)
```

Description

`childGrps = netcdf.inqGrps(ncid)` returns all the child group IDs in the parent group, specified by `ncid`.

Input Arguments

ncid

Identifier of NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

Output Arguments

childGrps

Array containing identifiers of child groups in the specified NetCDF file or group.

Examples

This example opens the sample NetCDF file and then gets information about the groups it contains.

```
ncid = netcdf.open('example.nc','nowrite');
```

```
childGroups = netcdf.inqGrps(ncid);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_grps` function in the netCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.inqNcid`

netcdf.inqNcid

Return ID of named group

Syntax

```
childGroupId = netcdf.inqNcid(ncid,childGroupName)
```

Description

`childGroupId = netcdf.inqNcid(ncid,childGroupName)` returns the ID of the child group, specified by the name `childGroupName`, in the file or group specified by `ncid`.

Input Arguments

ncid

Identifier of a NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

childGroupName

Character vector specifying the name of a NetCDF group.

Default:

Output Arguments

childGroupID

Identifier of a NetCDF group.

Examples

This example opens the sample NetCDF dataset and then gets the ID of a group in the dataset.

```
ncid = netcdf.open('example.nc','nowrite');
gid = netcdf.inqNcid(ncid,'grid1');
netcdf.close(ncid);
```

References

This function corresponds to the nc_inq_ncid function in the netCDF library C API. Read the files `netcdfcopyright.txt` and `mexnccopyright.txt` for more information.

See Also

`netcdf` | `netcdf.inqGrpName` | `netcdf.inqGrpNameFull`

netcdf.inqUnlimDims

Return list of unlimited dimensions in group

Syntax

```
unlimdimIDs = netcdf.inqUnlimDims(ncid)
```

Description

`unlimdimIDs = netcdf.inqUnlimDims(ncid)` returns the IDs of all unlimited dimensions in the group specified by `ncid`.

Input Arguments

`ncid`

Identifier of a NetCDF file, returned by `netcdf.create` or `netcdf.open`, or group, returned by `netcdf.defGrp`.

Default:

Output Arguments

`unlimDimIDs`

An array containing the identifiers of each unlimited dimension. `unlimDimIDs` is empty if there are no unlimited dimensions.

Examples

This example opens the NetCDF sample dataset and gets the IDs of all the unlimited dimensions.

```
ncid = netcdf.open('example.nc','NOWRITE');
dimids = netcdf.inqUnlimDims(ncid)

dimids =

     []

netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_unlim_dims` function in the NetCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.defDim` | `netcdf.inqDim` | `netcdf.inqDimID` | `netcdf.renameDim` | `netcdf.inqDimIDs`

netcdf.inqVarIDs

IDs of all variables in group

Syntax

```
varids = netcdf.inqVarIDs(ncid)
```

Description

`varids = netcdf.inqVarIDs(ncid)` returns IDs of the all the variables in the group specified by `ncid`.

Input Arguments

`ncid`

Identifier of NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

Output Arguments

`varids`

Array containing identifiers of variables in a NetCDF file or group.

Examples

This example opens the NetCDF sample file and gets the IDs of all the variables in a group.

```
ncid = netcdf.open('example.nc','NOWRITE');
```

```
gid = netcdf.inqNcid(ncid,'grid1');
varids = netcdf.inqVarIDs(gid);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_varids` function in the NetCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.inqDimIDs` | `netcdf.inqVarID`

netcdf.inqVarChunking

Determine chunking settings for NetCDF variable

Syntax

```
[storage,chunkSizes] = netcdf.inqVarChunking(ncid,varid)
```

Description

`[storage,chunkSizes] = netcdf.inqVarChunking(ncid,varid)` returns the type of chunking and the dimensions of a chunk for the NetCDF variable specified by `varid`, in the file or group specified by `ncid`.

Input Arguments

ncid

Identifier of NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

varid

Identifier of NetCDF variable, returned by `netcdf.defVar`.

Default:

Output Arguments

storage

Character vector specifying if NetCDF breaks the data into chunks when writing to a file. The value `'CHUNKED'` indicates the data is chunked; `'CONTIGUOUS'` indicates that the data is not chunked.

chunkSizes

Array specifying the dimensions of the chunk.

Because MATLAB uses FORTRAN-style ordering, the order of dimensions in `chunkdims` is reversed relative to what would be in the NetCDF C API.

If the storage type specified is `CONTIGUOUS`, `netcdf.inqVarChunking` returns an empty array, `[]`.

Examples

This example opens the NetCDF sample dataset and gets the values of chunking parameters associated with a variable.

```
ncid = netcdf.open('example.nc','NOWRITE');
groupid = netcdf.inqNcid(ncid,'grid1');
varid = netcdf.inqVarID(groupid,'temp');
[storage,chunkSize] = netcdf.inqVarChunking(groupid,varid);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_var_chunking` function in the netCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.defVar` | `netcdf.defVarChunking`

netcdf.inqVarDeflate

Determine compression settings for NetCDF variable

Syntax

```
[shuffle,deflate,deflateLevel] = netcdf.inqVarDeflate(ncid,varid)
```

Description

`[shuffle,deflate,deflateLevel] = netcdf.inqVarDeflate(ncid,varid)` returns the compression parameters for the NetCDF variable specified by `varid` in the location specified by `ncid`.

Input Arguments

ncid

Identifier of a NetCDF file, returned by `netcdf.create` or `netcdf.open`, or of a NetCDF group, returned by `netcdf.defGrp`.

Default:

varid

Identifier of NetCDF variable, returned by `netcdf.defVar`.

Default:

Output Arguments

shuffle

Boolean value. `true` indicates that the shuffle filter is enabled for the specified variable. The shuffle filter can assist with the compression of integer data by changing the byte order in the data stream.

deflate

Boolean value. `true` indicates that compression is enabled for this variable. The `deflateLevel` argument specifies the level of compression.

deflateLevel

Scalar value between `0` and `9` specifying the amount of compression, where `0` is no compression and `9` is the most compression

Examples

This example opens the NetCDF sample file and gets information about variable compression.

```
ncid = netcdf.open('example.nc','NOWRITE');
groupid = netcdf.inqNcid(ncid,'grid1');
varid = netcdf.inqVarID(groupid,'temp');
[shuffle,deflate,deflateLevel] = netcdf.inqVarDeflate(groupid,varid);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_var_deflate` function in the netCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.defVarDeflate`

netcdf.inqVarFill

Determine values of fill parameters for NetCDF variable

Syntax

```
[noFillMode,fillValue] = netcdf.inqVarFill(ncid,varid)
```

Description

`[noFillMode,fillValue] = netcdf.inqVarFill(ncid,varid)` returns the fill mode and the fill value for the variable `varid` in the NetCDF-4 file or group specified by `ncid`.

Input Arguments

ncid

Identifier of a NetCDF-4 file, returned by `netcdf.create` or `netcdf.open`, or a NetCDF group, returned by `netcdf.defGrp`.

Default:

varid

Identifier of NetCDF variable.

Default:

Output Arguments

noFillMode

Boolean value. `true` indicates that use of the fill values for the variable has been disabled.

fillValue

Specifies the value to use in the variable when no other value is specified and use of fill values has been enabled.

Examples

This example opens the NetCDF sample dataset and gets the fill mode and fill value used with a variable.

```
ncid = netcdf.open('example.nc','NOWRITE');
varid = netcdf.inqVarID(ncid,'temperature');
[noFillMode,fillValue] = netcdf.inqVarFill(ncid,varid);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_var_fill` function in the netCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.defVarFill` | `netcdf.setFill`

netcdf.inqVarFletcher32

Fletcher32 checksum setting for NetCDF variable

Syntax

```
setting = netcdf.inqVarFletcher32(ncid,varid)
```

Description

`setting = netcdf.inqVarFletcher32(ncid,varid)` returns the Fletcher32 checksum setting for the NetCDF variable specified by `varid` in the file or group specified by `ncid`.

Input Arguments

ncid

Identifier for NetCDF file, returned by `netcdf.create` or `netcdf.open`, or group, returned by `netcdf.defGrp`.

Default:

varid

Identifier of NetCDF variable.

Default:

Output Arguments

setting

Character vector specifying whether the Fletcher32 checksum is turned on for the specified variable. `netcdf.inqVarFletcher32` returns `'FLETCHER32'` or `'NOCHECKSUM'`.

- `'FLETCHER32'` — If the checksum is turned on for the variable.
- `'NOCHECKSUM'` — Otherwise.

Examples

This example opens the sample NetCDF file and gets information about the checksum setting for a variable.

```
ncid = netcdf.open('example.nc','NOWRITE');
varid = netcdf.inqVarID(ncid,'temperature');
setting = netcdf.inqVarFletcher32(ncid,varid);
netcdf.close(ncid);
```

References

This function corresponds to the `nc_inq_var_fletcher32` function in the netCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` for more information.

See Also

`netcdf` | `netcdf.defVarFletcher32`

netcdf.inqAtt

Return information about netCDF attribute

Syntax

```
[xtype,attlen] = netcdf.inqAtt(ncid,varid,attname)
```

Description

`[xtype,attlen] = netcdf.inqAtt(ncid,varid,attname)` returns the data type, `xtype`, and length, `attlen`, of the attribute identified by the character vector `attname`.

`ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

`varid` identifies the variable that the attribute is associated with. To get information about a global attribute, specify `netcdf.getConstant('NC_GLOBAL')` in place of `varid`.

This function corresponds to the `nc_inq_att` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example opens the example netCDF file included with MATLAB, `example.nc`, and gets information about an attribute in the file.

```
% Open netCDF example file.
ncid = netcdf.open('example.nc','NOWRITE');

% Get identifier of a variable in the file, given its name.
varid = netcdf.inqVarID(ncid,'avagadros_number');

% Get attribute name, given variable id and attribute number.
attname = netcdf.inqAttName(ncid,varid,0);
```

```
% Get information about the attribute.
[xtype,attlen] = netcdf.inqAtt(ncid,varid,'description')

xtype =

     2


attlen =

    31

% Get name of global attribute
gattname = netcdf.inqAttName(ncid,netcdf.getConstant('NC_GLOBAL'),0);

% Get information about global attribute.
[gxtype gattlen] = netcdf.inqAtt(ncid,netcdf.getConstant('NC_GLOBAL'),gattname)

gxtype =

     2


gattlen =

    11
```

See Also

netcdf.inqAttID | netcdf.inqAttName

netcdf.inqAttID

Return ID of netCDF attribute

Syntax

```
attnum = netcdf.inqAttID(ncid,varid,attname)
```

Description

`attnum = netcdf.inqAttID(ncid,varid,attname)` retrieves `attnum`, the identifier of the attribute indicated by `attname`. Specify `attname` as a character vector.

`varid` specifies the variable the attribute is associated with.

`ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

This function corresponds to the `nc_inq_attid` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example opens the netCDF example file included with MATLAB, `example.nc`.

```
% Open the netCDF example file.
ncid = netcdf.open('example.nc','NC_NOWRITE');

% Get the identifier of a variable in the file.
varid = netcdf.inqVarID(ncid,'avagadros_number');

% Retrieve the identifier of the attribute associated with the variable.
attid = netcdf.inqAttID(ncid,varid,'description');
```

See Also

`netcdf.inqAtt` | `netcdf.inqAttName`

netcdf.inqAttName

Return name of netCDF attribute

Syntax

```
attname = netcdf.inqAttName(ncid,varid,attnum)
```

Description

`attname = netcdf.inqAttName(ncid,varid,attnum)` returns `attname`, a character vector containing the name of an attribute.

`ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

`varid` is a numeric identifier of a variable in the file. If you want to get the name of a global attribute in the file, use `netcdf.getConstant('NC_GLOBAL')` in place of `attnum` is a zero-based numeric value specifying the attribute, with 0 indicating the first attribute, 1 the second attribute, and so on.

This function corresponds to the `nc_inq_attname` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example opens the example netCDF file included with MATLAB, `example.nc`.

```
% Open netCDF example file.
ncid = netcdf.open('example.nc','NC_NOWRITE');

% Get identifier of a variable in the file.
varid = netcdf.inqVarID(ncid,'avagadros_number')

% Get the name of the attribute associated with the variable.
attname = netcdf.inqAttName(ncid,varid,0)
```

```
attname =

description

% Get the name of the global attribute associated with the variable.
gattname = netcdf.inqAttName(ncid,netcdf.getConstant('NC_GLOBAL'),0)

gattname =

creation_date
```

See Also

netcdf.inqAtt | netcdf.inqAttID

netcdf.inqDim

Return netCDF dimension name and length

Syntax

```
[dimname, dimlen] = netcdf.inqDim(ncid,dimid)
```

Description

`[dimname, dimlen] = netcdf.inqDim(ncid,dimid)` returns the name, `dimname`, and length, `dimlen`, of the dimension specified by `dimid`. If `ndims` is the number of dimensions defined for a netCDF file, each dimension has an ID between 0 and `ndims-1`. For example, the dimension identifier of the first dimension is 0, the second dimension is 1, and so on.

`ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

This function corresponds to the `nc_inq_dim` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

The example opens the example netCDF file include with MATLAB, `example.nc`.

```
ncid = netcdf.open('example.nc','NC_NOWRITE');

% Get name and length of first dimension
[dimname, dimlen] = netcdf.inqDim(ncid,0)

dimname =

x


dimlen =
```

```
50
```

See Also

`netcdf.inqDimID`

netcdf.inqDimID

Return dimension ID

Syntax

```
dimid = netcdf.inqDimID(ncid,dimname)
```

Description

`dimid = netcdf.inqDimID(ncid,dimname)` returns `dimid`, the identifier of the dimension specified by the character vector `dimname`. You can use the `netcdf.inqDim` function to retrieve the dimension name. `ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

This function corresponds to the `nc_inq_dimid` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example opens the example netCDF file included with MATLAB, `example.nc`.

```
% Open netCDF example file.
ncid = netcdf.open('example.nc','NC_NOWRITE');

% Get name and length of first dimension
[dimname, dimlen] = netcdf.inqDim(ncid,0);

% Retrieve identifier of dimension.
dimid = netcdf.inqDimID(ncid,dimname)

dimid =

     0
```

See Also

`netcdf.inqDim`

netcdf.inqLibVers

Return NetCDF library version information

Syntax

```
libvers = netcdf.inqLibVers
```

Description

`libvers = netcdf.inqLibVers` returns a character vector identifying the version of the NetCDF library.

This function corresponds to the `nc_inq_libvers` function in the NetCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

```
libvers = netcdf.inqLibVers
```

```
libvers =

4.3.3.1
```

netcdf.inqVar

Information about variable

Syntax

```
[varname,xtype,dimids,natts] = netcdf.inqVar(ncid,varid)
```

Description

`[varname,xtype,dimids,natts] = netcdf.inqVar(ncid,varid)` returns information about the variable identified by `varid`. The argument, `ncid`, is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

The output argument, `varname`, is the name of the variable. `xtype` is the data type, `dimids` is the dimension IDs, and `natts` is the number of attributes associated with the variable. Dimension IDs are zero-based.

This function corresponds to the `nc_inq_var` function in the netCDF library C API. Because MATLAB uses FORTRAN-style ordering, however, the order of the dimension IDs is reversed relative to what would be obtained from the C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

Open the example netCDF file included with MATLAB, `example.nc`, and get information about a variable in the file.

```
% Open the example netCDF file.
ncid = netcdf.open('example.nc','NC_NOWRITE');

% Get information about third variable in the file.
[varname, xtype, dimids, numatts] = netcdf.inqVar(ncid,2)

varname =
```

```
peaks

xtype =

     5


dimids =

     0     1


numatts =

     1     1
```

See Also

netcdf.create | netcdf.inqVarID | netcdf.open

netcdf.inqVarID

Return ID associated with variable name

Syntax

```
varid = netcdf.inqVarID(ncid,varname)
```

Description

`varid = netcdf.inqVarID(ncid,varname)` returns `varid`, the ID of a netCDF variable specified by the character vector `varname`.

`ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

This function corresponds to the `nc_inq_varid` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example opens the example netCDF file included with MATLAB, `example.nc`, and uses several inquiry functions to get the ID of the first variable.

```
ncid = netcdf.open('example.nc','NC_NOWRITE');

% Get information about first variable in the file.
[varname, xtype, dimids, atts] = netcdf.inqVar(ncid,0);

% Get variable ID of the first variable, given its name
varid = netcdf.inqVarID(ncid,varname)

varid =

     0
```

See Also

`netcdf.create` | `netcdf.inqVar` | `netcdf.open`

netcdf.open

Open NetCDF data source

Syntax

```
ncid = netcdf.open(source)
ncid = netcdf.open(source,mode)
[chosen_chunksize, ncid] = netcdf.open(source,mode,chunksize)
```

Description

`ncid = netcdf.open(source)` opens `source`, which can be the name of a NetCDF file or the URL of an OPeNDAP NetCDF data source, for read-only access. Returns a NetCDF ID in `ncid`.

`ncid = netcdf.open(source,mode)` opens `source` with the type of access specified by `mode`, which can have any of the following values.

Value	Description
`'WRITE'`	Read-write access
`'SHARE'`	Synchronous file updates
`'NOWRITE'`	Read-only access (Default)

You can also specify `mode` as a numeric value that can be retrieved using `netcdf.getConstant`. Use these numeric values when you want to specify a bitwise-OR of several modes.

`[chosen_chunksize, ncid] = netcdf.open(source,mode,chunksize)` opens `source`, an existing netCDF data source, specifying the additional I/O performance tuning parameter, `chunksize`. The actual value used by the NetCDF library might not correspond to the input value you specify.

This function corresponds to the `nc_open` and `nc__open` functions in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example opens the example NetCDF file included with MATLAB, `example.nc`.

```
ncid = netcdf.open('example.nc','NOWRITE');
netcdf.close(ncid);
```

See Also

`netcdf.close` | `netcdf` | `netcdf.getConstant`

netcdf.putAtt

Write netCDF attribute

Syntax

```
netcdf.putAtt(ncid,varid,attrname,attrvalue)
```

Description

`netcdf.putAtt(ncid,varid,attrname,attrvalue)` writes the attribute named `attrname` with value `attrvalue` to the netCDF variable specified by `varid`. To specify a global attribute, use `netcdf.getConstant('NC_GLOBAL')` for `varid`.

`ncid` is a netCDF file identifier returned by `netCDF.create` or `netCDF.open`.

Note: You cannot use `netcdf.putAtt` to set the `'_FillValue'` attribute of NetCDF4 files. Use the `netcdf.defVarFill` function to set the fill value for a variable.

This function corresponds to several attribute I/O functions in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example creates a new netCDF file, defines a dimension and a variable, adds data to the variable, and then creates an attribute associated with the variable. To run this example, you must have writer permission in your current directory.

```
% Create a variable in the workspace.
my_vardata = linspace(0,50,50);

% Create a netCDF file.
ncid = netcdf.create('foo.nc','NC_WRITE');
```

```
% Define a dimension in the file.
dimid = netcdf.defDim(ncid,'my_dim',50);

% Define a new variable in the file.
varid = netcdf.defVar(ncid,'my_var','double',dimid);

% Leave define mode and enter data mode to write data.
netcdf.endDef(ncid);

% Write data to variable.
netcdf.putVar(ncid,varid,my_vardata);

% Re-enter define mode.
netcdf.reDef(ncid);

% Create an attribute associated with the variable.
netcdf.putAtt(ncid,0,'my_att',10);

% Verify that the attribute was created.
[xtype xlen] = netcdf.inqAtt(ncid,0,'my_att')

xtype =

     6


xlen =

     1
```

This example creates a new netCDF file, specifies a global attribute, and assigns a value to the attribute.

```
ncid = netcdf.create('myfile.nc','CLOBBER');
varid = netcdf.getConstant('GLOBAL');
netcdf.putAtt(ncid,varid,'creation_date',datestr(now));
netcdf.close(ncid);
```

See Also

netcdf.getAtt | netcdf.defVarFill | netcdf.getConstant

netcdf.putVar

Write data to netCDF variable

Syntax

```
netcdf.putVar(ncid,varid,data)
netcdf.putVar(ncid,varid,start,data)
netcdf.putVar(ncid,varid,start,count,data)
netcdf.putVar(ncid,varid,start,count,stride,data)
```

Description

`netcdf.putVar(ncid,varid,data)` writes `data` to a netCDF variable identified by `varid`.

Note: For variable values containing text data, the `data` input must have only ASCII encoded characters.

`ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

`netcdf.putVar(ncid,varid,start,data)` writes a single data value into the variable at the index specified by `start`.

`netcdf.putVar(ncid,varid,start,count,data)` writes a section of values into the netCDF variable at the index specified by the vector `start` to the extent specified by the vector `count`, along each dimension of the specified variable.

`netcdf.putVar(ncid,varid,start,count,stride,data)` writes the subsection specified by sampling interval, `stride`, of the values in the section of the variable beginning at the index `start` and to the extent specified by `count`.

This function corresponds to several variable I/O functions in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

Write Variable to New netCDF File

Create a new netCDF file and write a variable to the file.

Create a 50 element vector for a variable.

```
my_vardata = linspace(0,50,50);
```

Open the netCDF file.

```
ncid = netcdf.create('foo.nc','NOCLOBBER');
```

Define the dimensions of the variable.

```
dimid = netcdf.defDim(ncid,'my_dim',50);
```

Define a new variable in the file.

```
my_varID = netcdf.defVar(ncid,'my_var','double',dimid);
```

Leave define mode and enter data mode to write data.

```
netcdf.endDef(ncid);
```

Write data to variable.

```
netcdf.putVar(ncid,my_varID,my_vardata);
```

Verify that the variable was created.

```
[varname xtype dimid natts ] = netcdf.inqVar(ncid,0)
```

```
varname =
'my_var'

xtype = 6

dimid = 0

natts = 0
```

Close the file.

```
netcdf.close(ncid)
```

Write Elements of Variable

Write to the first ten elements of the example `temperature` variable.

```
srcFile = fullfile(matlabroot,'toolbox','matlab','demos','example.nc');
copyfile(srcFile,'myfile.nc');
fileattrib('myfile.nc','+w');
ncid = netcdf.open('myfile.nc','WRITE');
varid = netcdf.inqVarID(ncid,'temperature');
data = [100:109];
netcdf.putVar(ncid,varid,0,10,data);
netcdf.close(ncid);
```

See Also

`netcdf.getVar`

netcdf.reDef

Put open netCDF file into define mode

Syntax

```
netcdf.reDef(ncid)
```

Description

`netcdf.reDef(ncid)` puts an open netCDF file into define mode so that dimensions, variables, and attributes can be added or renamed. Attributes can also be deleted in define mode. `ncid` is a valid NetCDF file ID, returned from a previous call to `netcdf.open` or `netcdf.create`.

This function corresponds to the `nc_redef` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example opens a local copy of the example netCDF file included with MATLAB, `example.nc`.

```
% Open a netCDF file.
ncid = netcdf.open('my_example.nc','NC_WRITE')

% Try to define a dimension.
dimid = netcdf.defdim(ncid, 'lat', 50); % should fail.
??? Error using ==> netcdflib
NetCDF: Operation not allowed in data mode

Error in ==> defDim at 22
dimid = netcdflib('def_dim', ncid,dimname,dimlen);

% Put file in define mode.
netcdf.reDef(ncid);
```

```
% Try to define a dimension again. Should succeed.
dimid = netcdf.defDim(ncid, 'lat', 50);
```

See Also

netcdf.create | netcdf.endDef | netcdf.open

netcdf.renameAtt

Change name of attribute

Syntax

```
netcdf.renameAtt(ncid,varid,oldName,newName)
```

Description

`netcdf.renameAtt(ncid,varid,oldName,newName)` changes the name of the attribute specified by the character vector `oldName`.

`newName` is a character vector specifying the new name.

`ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`.

`varid` identifies the variable to which the attribute is associated. To specify a global attribute, use `netcdf.getConstant('NC_GLOBAL')` for `varid`.

This function corresponds to the `nc_rename_att` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example modifies a local copy of the example netCDF file included with MATLAB, `example.nc`.

```
% Open netCDF file.
ncid = netcdf.open('my_example.nc','NC_WRITE')

% Get the ID of a variable the attribute is associated with.
varID = netcdf.inqVarID(ncid,'avagadros_number')

% Rename the attribute.
netcdf.renameAtt(ncid,varID,'description','Description');
```

```
% Verify that the name changed.
attname = netcdf.inqAttName(ncid,varID,0)

attname =

Description
```

See Also

netcdf.inqAttName

netcdf.renameDim

Change name of netCDF dimension

Syntax

```
netcdf.renameDim(ncid,dimid,newName)
```

Description

`netcdf.renameDim(ncid,dimid,newName)` renames the dimension identified by the dimension identifier, `dimid`.

`newName` is a character vector specifying the new name. `ncid` is a netCDF file identifier returned by `netcdf.create` or `netcdf.open`

This function corresponds to the `nc_rename_dim` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example modifies a local copy of the example netCDF file included with MATLAB, `example.nc`.

```
% Open netCDF file.
ncid = netcdf.open('my_example.nc','NC_WRITE')

% Put file is define mode.
netcdf.reDef(ncid)

% Get the identifer of a dimension to rename.
dimid = netcdf.inqDimID(ncid,'x');

% Rename the dimension.
netcdf.renameDim(ncid,dimid,'Xdim')
```

```
% Verify that the name changed.
data = netcdf.inqDim(ncid,dimid)

data =

Xdim
```

See Also

netcdf.defDim

netcdf.renameVar

Change name of netCDF variable

Syntax

```
netcdf.renameVar(ncid,varid,newName)
```

Description

`netcdf.renameVar(ncid,varid,newName)` renames the variable identified by `varid` in the netCDF file identified by `ncid`.`newName` is a character vector specifying the new name.

This function corresponds to the `nc_rename_var` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example modifies a local copy of the example netCDF file included with MATLAB, `example.nc`.

```
% Open netCDF file.
ncid = netcdf.open('my_example.nc','NC_WRITE')

% Put file in define mode.
netcdf.redef(ncid)

% Get name of first variable
[varname, xtype, varDimIDs, varAtts] = netcdf.inqVar(ncid,0);

varname

varname =

avagadros_number
```

```
% Rename the variable, using a capital letter to start the name.
netcdf.renameVar(ncid,0,'Avagadros_number')

% Verify that the name of the variable changed.
[varname, xtype, varDimIDs, varAtts] = netcdf.inqVar(ncid,0);

varname

varname =

Avagadros_number
```

See Also

netCDF.defVar | netCDF.inqVar | netCDF.putVar

netcdf.setChunkCache

Set default chunk cache settings for NetCDF library

Syntax

```
netcdf.setChunkCache(csize,nelems,premp)
```

Description

`netcdf.setChunkCache(csize,nelems,premp)` sets the default chunk cache settings used by the NetCDF library.

Settings apply for subsequent file open or create operations, for the remainder of the MATLAB session or until you issue a `clear mex` call. This function does not change the chunk cache settings of files already open.

Input Arguments

`csize`

Scalar double specifying the total size of the raw data chunk cache in bytes.

Default:

`nelems`

Scalar double specifying the number of chunk slots in the raw data chunk cache hash table.

Default:

`premp`

Scalar double, between `0` and `1`, inclusive, that specifies how the library handles preempting fully read chunks in the chunk cache. A value of `0` means fully read chunks are treated no differently than other chunks, that is, preemption occurs solely based

on the Least Recently Used (LRU) algorithm. A value of 1 means fully read chunks are always preempted before other chunks.

Default:

Examples

This example sets the cache chunk size used by the NetCDF library.

```
netcdf.setChunkCache(32000000, 2003, .75)
```

References

This function corresponds to the `nc_set_chunk_cache` function in the NetCDF library C API.

For copyright information, read the `netcdfcopyright.txt` and `mexnccopyright.txt` files.

See Also

`netcdf` | `netcdf.getChunkCache`

netcdf.setDefaultFormat

Change default netCDF file format

Syntax

```
oldFormat = netcdf.setDefaultFormat(newFormat)
```

Description

`oldFormat = netcdf.setDefaultFormat(newFormat)` changes the default format used by `netCDF.create` when creating new netCDF files, and returns the value of the old format. You can use this function to change the format used by a netCDF file without having to change the creation mode flag used in each call to `netCDF.create`.

`newFormat` can be either of the following values.

Value	Description
`'NC_FORMAT_CLASSIC'`	Original netCDF file format
`'NC_FORMAT_64BIT'`	64-bit offset format; relaxes limitations on creating very large files

You can also specify the numeric equivalent of these values, as retrieved by `netcdf.getConstant`.

This function corresponds to the `nc_set_default_format` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

```
oldFormat = netcdf.setDefaultFormat('NC_FORMAT_64BIT');
```

See Also

`netcdf.create`

netcdf.setFill

Set netCDF fill mode

Syntax

```
old_mode = netcdf.setFill(ncid,new_mode)
```

Description

`old_mode = netcdf.setFill(ncid,new_mode)` sets the fill mode for a netCDF file identified by `ncid`.

`new_mode` can be either `'FILL'` or `'NOFILL'` or their numeric equivalents, as retrieved by `netcdf.getConstant`. The default mode is `'FILL'`. netCDF pre-fills data with fill values. Specifying `'NOFILL'` can be used to enhance performance, because it avoids the duplicate writes that occur when the netCDF writes fill values that are later overwritten with data.

This function corresponds to the `nc_set_fill` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example creates a new file and specifies the fill mode used by netCDF with the file.

```
ncid = netcdf.open('foo.nc','NC_WRITE');

% Set filling behavior
old_mode = netcdf.setFill(ncid,'NC_NOFILL');
```

See Also

`netcdf.getConstant`

netcdf.sync

Synchronize netCDF file to disk

Syntax

```
netcdf.sync(ncid)
```

Description

`netcdf.sync(ncid)` synchronizes the state of a netCDF file to disk. The netCDF library normally buffers accesses to the underlying netCDF file, unless you specify the `NC_SHARE` mode when you opened the file with `netcdf.open` or `netcdf.create`. To call `netcdf.sync`, the netCDF file must be in data mode.

This function corresponds to the `nc_sync` function in the netCDF library C API. To use this function, you should be familiar with the netCDF programming paradigm. See `netcdf` for more information.

Examples

This example creates a new netCDF file for write access, performs an operation on the file, takes the file out of define mode, and then synchronizes the file to disk.

```
% Create a netCDF file.
ncid = netcdf.create('foo.nc','NC_WRITE');

% Perform an operation.
dimid = netcdf.defDim(ncid,'Xdim',50);

% Take file out of define mode.
netcdf.endDef(ncid);

% Synchronize the file to disk.
netcdf.sync(ncid)
```

See Also

`netcdf.close` | `netcdf.create` | `netcdf.open` | `netcdf.endDef`

newline

Create newline character

Syntax

```
c = newline
```

Description

`c = newline` creates a newline character. `newline` is equivalent to `char(10)`. Use `newline` to concatenate a newline character onto a character vector or a string, or to split text on newline characters.

Examples

Add Newline to Character Vector and String

Create a newline character with `newline` and concatenate it onto a character vector.

```
chr = 'Whose woods these are I think I know.';
chr = [chr newline 'His house is in the village though']
```

```
chr =
    'Whose woods these are I think I know.
     His house is in the village though'
```

Although `chr` displays on two lines, `chr` is a 1-by-73 character vector that contains the two sentences, separated by a newline.

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Create a newline character. Then use `+` to concatenate the newline character and more text onto the end of a string.

```
str = "In Xanadu did Kubla Khan";
str = str + newline + "A stately pleasure-dome decree"
```

```
str =
```

```
"In Xanadu did Kubla Khan
 A stately pleasure-dome decree"
```

Although `str` displays on two lines, `str` is a 1-by-1 string.

Tips

The `newline` function does not create carriage return or line feed characters.

See Also

See Also

`char` | `splitlines` | `string`

Introduced in R2016b

newplot

Determine where to draw graphics objects

Syntax

```
newplot
h = newplot
h = newplot(hsave)
```

Description

`newplot` prepares a figure and axes for subsequent graphics commands.

`h = newplot` prepares a figure and axes for subsequent graphics commands and returns a handle to the current axes.

`h = newplot(hsave)` prepares and returns an axes, but does not delete any objects whose handles you have assigned to the `hsave` argument, which can be a vector of handles. If `hsave` is not empty, the figure and axes containing `hsave` are prepared for plotting instead of the current axes of the current figure. If `hsave` is empty, `newplot` behaves as if it were called without any inputs.

Tips

To create a simple 2-D plot, use the `plot` function instead.

Use `newplot` at the beginning of high-level graphics code to determine which figure and axes to target for graphics output. Calling `newplot` can change the current figure and current axes. Basically, there are three options when you are drawing graphics in existing figures and axes:

- Add the new graphics without changing any properties or deleting any objects.
- Delete all existing objects whose handles are not hidden before drawing the new objects.

- Delete all existing objects regardless of whether or not their handles are hidden, and reset most properties to their defaults before drawing the new objects (refer to the following table for specific information).

The figure and axes NextPlot properties determine how `newplot` behaves. The following two tables describe this behavior with various property values.

First, `newplot` reads the current figure's NextPlot property and acts accordingly.

NextPlot	What Happens
`new`	Create a new figure and use it as the current figure.
`add`	Draw to the current figure without clearing any graphics objects already present.
`replacechildren`	Remove all child objects whose `HandleVisibility` property is set to `on` and reset figure `NextPlot` property to `add`. This clears the current figure and is equivalent to issuing the `clf` command.
`replace`	Remove all child objects (regardless of the setting of the HandleVisibility property) and reset figure properties to their defaults, except `NextPlot` is reset to `add` regardless of user-defined defaults. • Position, Units, PaperPosition, and PaperUnits are not reset. This clears and resets the current figure and is equivalent to issuing the `clf reset` command.

After `newplot` establishes which figure to draw in, it reads the current axes' `NextPlot` property and acts accordingly.

NextPlot	Description
`add`	Draw into the current axes, retaining all graphics objects already present.

NextPlot	Description
`replacechildren`	Remove all child objects whose `HandleVisibility` property is set to `on`, but do not reset axes properties. This clears the current axes like the `cla` command.
`replace`	Remove all child objects (regardless of the setting of the HandleVisibility property) and reset axes properties to their defaults, except `Position` and `Units`. This clears and resets the current axes like the `cla reset` command.

See Also

`plot` | `axes` | `cla` | `clf` | `figure` | `hold` | `ishold` | `reset`

Topics

"Control Graph Display"

Introduced before R2006a

nextDirectory

Class: Tiff

Make next IFD current IFD

Syntax

```
nextDirectory(tiffobj)
```

Description

`nextDirectory(tiffobj)` makes the next image file directory (IFD) in the file the current IFD. `Tiff` object methods operate on the current IFD. Use this method to navigate among IFDs in a TIFF file containing multiple images.

Examples

Make Next Directory the Current Directory

Open a `Tiff` object and change the current IFD to the next IFD in the file.

```
t = Tiff('example.tif','r');
nextDirectory(t);
close(t);
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFReadDirectory` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.setDirectory

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

nextpow2

Exponent of next higher power of 2

Syntax

```
P = nextpow2(A)
```

Description

`P = nextpow2(A)` returns the exponents for the smallest powers of two that satisfy

$$2^p \geq |A|$$

for each element in A.

You can use `nextpow2` to pad the signal you pass to `fft`. Doing so can speed up the computation of the FFT when the signal length is not an exact power of 2.

Examples

Next Power of 2 of Double Integer Values

Define a vector of `double` integer values and calculate the exponents for the next power of 2 higher than those values.

```
a = [1 -2 3 -4 5 9 519];
p = nextpow2(a)
```

```
p =

     0     1     2     2     3     4    10
```

Calculate the positive next powers of 2.

```
np2 = 2.^p
```

```
np2 =

           1           2           4           4           8          16        1024
```

Preserve the sign of the original input values.

```
np2.*sign(a)
```

```
ans =

           1          -2           4          -4           8          16        1024
```

Next Power of 2 of Unsigned Integer Values

Define a vector of unsigned integers and calculate the exponents for the next power of 2 higher than those values.

```
a = uint32([1020 4000 32700]);
p = nextpow2(a)
```

```
p = 1×3 uint32 row vector

   10   12   15
```

Calculate the next powers of 2 higher than the values in `a`.

```
2.^p
```

```
ans = 1×3 uint32 row vector

    1024    4096   32768
```

Optimize FFT with Padding

Use the `nextpow2` function to increase the performance of `fft` when the length of a signal is not a power of 2.

Create a 1-D vector containing 8191 sample values.

```
x = gallery('uniformdata',[1,8191],0);
```

Calculate the next power of 2 higher than 8191.

```
p = nextpow2(8191);
n = 2^p
```

```
n = 8192
```

Pass the signal and the next power of 2 to the `fft` function.

```
y = fft(x,n);
```

Input Arguments

A — Input values

scalar, vector, or array of real numbers

Input values, specified as a scalar, vector, or array of real numbers of any numeric type.

Example: `15`

Example: `[-15.123 32.456 63.111]`

Example: `int16([-15 32 63])`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`fft` | `log2` | `pow2`

Introduced before R2006a

nnz

Number of nonzero matrix elements

Syntax

```
n = nnz(X)
```

Description

`n = nnz(X)` returns the number of nonzero elements in matrix `X`.

The density of a sparse matrix is `nnz(X)/prod(size(X))`.

Examples

The matrix

```
w = sparse(wilkinson(21));
```

is a tridiagonal matrix with `20` nonzeros on each of three diagonals, so `nnz(w) = 60`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`nzmax` | `size` | `whos` | `find` | `isa` | `nonzeros`

Introduced before R2006a

noanimate

Change `EraseMode` of all objects to `normal`

Note: `noanimate` has been removed.

Syntax

```
noanimate(state,fig_handle)
noanimate(state)
```

Description

`noanimate(state,fig_handle)` sets the `EraseMode` of all image, line, patch, surface, and text graphics objects in the specified figure to `normal`. `state` can be the following:

- `'save'` — Set the values of the `EraseMode` properties to `normal` for all the appropriate objects in the designated figure.
- `'restore'` — Restore the `EraseMode` properties to the previous values (i.e., the values before calling `noanimate` with the `'save'` argument).

`noanimate(state)` operates on the current figure.

`noanimate` is useful if you want to print the figure to a TIFF or JPEG format.

See Also

`print`

Introduced before R2006a

nonzeros

Nonzero matrix elements

Syntax

```
s = nonzeros(A)
```

Description

`s = nonzeros(A)` returns a full column vector of the nonzero elements in `A`, ordered by columns.

This gives the `s`, but not the `i` and `j`, from `[i,j,s] = find(A)`. Generally,

```
length(s) = nnz(A) <= nzmax(A) <= prod(size(A))
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`find` | `isa` | `nnz` | `nzmax` | `size` | `whos`

Introduced before R2006a

norm

Vector and matrix norms

Syntax

```
n = norm(v)
n = norm(v,p)

n = norm(X)
n = norm(X,p)
n = norm(X,'fro')
```

Description

`n = norm(v)` returns the 2-norm or Euclidean norm of vector `v`.

`n = norm(v,p)` returns the generalized vector p-norm.

`n = norm(X)` returns the 2-norm or maximum singular value of matrix `X`, which is approximately `max(svd(X))`.

`n = norm(X,p)` returns the *p*-norm of matrix `X`, where `p` is `1`, `2`, or `Inf`:

- If `p = 1`, then `n` is the maximum absolute column sum of the matrix.
- If `p = 2`, then `n` is approximately `max(svd(X))`. This is equivalent to `norm(X)`.
- If `p = Inf`, then `n` is the maximum absolute row sum of the matrix.

`n = norm(X,'fro')` returns the Frobenius norm of matrix `X`.

Examples

1- and 2- Norm of Vector

Calculate the 2-norm of a vector corresponding to the point (-2,3,-1) in 3-D space. The 2-norm is equal to the Euclidean length of the vector.

```
X = [-2 3 -1];
n = norm(X)
```

```
n = 3.7417
```

Calculate the 1-norm of the vector, which is the sum of the element magnitudes.

```
n = norm(X,1)
```

```
n = 6
```

2-Norm of Matrix

Calculate the 2-norm of a matrix, which is the largest singular value.

```
X = [2 0 1;-1 1 0;-3 3 0];
n = norm(X)
```

```
n = 4.7234
```

Frobenius Norm of Sparse Matrix

Use `'fro'` to calculate the Frobenius norm of a sparse matrix, which calculates the 2-norm of the column vector, `S(:)`.

```
S = sparse(1:25,1:25,1);
n = norm(S,'fro')
```

```
n = 5
```

Input Arguments

v — Input vector
vector

Input vector.

Data Types: `single` | `double`
Complex Number Support: Yes

X — Input matrix
matrix

Input matrix.

Data Types: `single` | `double`
Complex Number Support: Yes

p — Norm type
2 (default) | positive integer scalar | `Inf` | `-Inf`

Norm type, specified as `2` (default), a different positive integer scalar, `Inf`, or `-Inf`. The valid values of `p` and what they return depend on whether the first input to `norm` is a matrix or vector, as shown in the table.

Note: This table does not reflect the actual algorithms used in calculations.

p	Matrix	Vector
1	`max(sum(abs(X)))`	`sum(abs(X))`
2	`max(svd(X))`	`sum(abs(X).^2)^(1/2)`
Positive, real-valued numeric `p`	—	`sum(abs(X).^p)^(1/p)`
`Inf`	`max(sum(abs(X')))`	`max(abs(X))`
`-Inf`	—	`min(abs(X))`

Output Arguments

n — Matrix or vector norm
scalar

Matrix or vector norm, returned as a scalar. The norm gives a measure of the magnitude of the elements. By convention, `norm` returns `NaN` if the input contains `NaN` values.

Definitions

Euclidean Norm

The Euclidean norm (or 2-norm) of a vector `v` that has `N` elements is defined by

$$\|v\| = \sqrt{\sum_{k=1}^{N} |v_k|^2}.$$

General Vector Norm

The general definition for the vector p-norm of a vector `v` that has `N` elements is

$$\|v\|_p = \left[\sum_{k=1}^{N} |v_k|^p\right]^{1/p},$$

where `p` is any positive real value, `Inf`, or `-Inf`.

- If `p = Inf`, then $\|v\|_\infty = \max_i\left(|v(i)|\right)$.
- If `p = -Inf`, then $\|v\|_{-\infty} = \min_i\left(|v(i)|\right)$.

Maximum Absolute Column Sum

The maximum absolute column sum of an `m`-by-`n` matrix `X` (with `m,n >= 2`) is defined by

$$\|X\|_1 = \max_{1\le j\le n}\left(\sum_{i=1}^{m} |a_{ij}|\right).$$

Maximum Absolute Row Sum

The maximum absolute row sum of an `m`-by-`n` matrix `X` (with `m,n >= 2`) is defined by

$$\|X\|_\infty = \max_{1\le i\le m}\left(\sum_{j=1}^{n} |a_{ij}|\right).$$

Frobenius Norm

The Frobenius norm of an `m`-by-`n` matrix `X` (with `m,n >= 2`) is defined by

$$\|X\|_F = \sqrt{\sum_{i=1}^{m}\sum_{j=1}^{n}\left|a_{ij}\right|^2} = \sqrt{\operatorname{trace}\left(X^{\dagger}X\right)}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cond` | `condest` | `hypot` | `normest` | `rcond`

Introduced before R2006a

normest

2-norm estimate

Syntax

```
nrm = normest(S)
nrm = normest(S,tol)
[nrm,count] = normest(...)
```

Description

This function is intended primarily for sparse matrices, although it works correctly and may be useful for large, full matrices as well.

`nrm = normest(S)` returns an estimate of the 2-norm of the matrix `S`.

`nrm = normest(S,tol)` uses relative error `tol` instead of the default tolerance `1.e-6`. The value of `tol` determines when the estimate is considered acceptable.

`[nrm,count] = normest(...)` returns an estimate of the 2-norm and also gives the number of power iterations used.

Algorithms

The power iteration involves repeated multiplication by the matrix `S` and its transpose, `S'`. The iteration is carried out until two successive estimates agree to within the specified relative tolerance.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`norm` | `rcond` | `svd` | `cond` | `condest`

Introduced before R2006a

not, ~

Find logical NOT

Syntax

```
~A
not(A)
```

Description

`~A` returns a logical array of the same size as `A`. The array contains logical `1` (`true`) values where `A` is zero and logical `0` (`false`) values where `A` is nonzero.

`not(A)` is an alternate way to execute `~A`, but is rarely used. It enables operator overloading for classes.

Examples

Logical Negation of Matrix

Create a 3-by-3 identity matrix.

```
A = eye(3)
```

```
A =

     1     0     0
     0     1     0
     0     0     1
```

Find the logical negation of `A`. The new matrix has type `logical`.

```
B = ~A
```

```
B = 3×3 logical array
   0   1   1
   1   0   1
```

```
   1   1   0
```

Conditional Code Execution

Execute code based on a condition using the logical not operator in the context of an `if` loop.

Create a logical variable `A`.

```
A = false;
```

Use `A` to write an if/else code block. Wrap the if/else block in a `for` loop so that it executes four times.

```
for k = 1:4
    if ~A
        disp('IF block')
        A = true;
    else
        disp('ELSE block')
    end
end
```

```
IF block

ELSE block

ELSE block

ELSE block
```

On the first iteration, `A` is `false`, so the `if` block executes since `~A` is `true`. However, the `if` block also changes the value of `A` to `true`. In the remaining iterations, `~A` is `false` and the `else` block executes.

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a numeric scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

Tips

- You also can use the ~ symbol as a placeholder output argument in a function call. For example, `[~,i] = max(A)` suppresses the first output of the `max` function, returning only the indices of the maximum values. For more information, see "Ignore Function Inputs".

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`all` | `and` | `any` | `bitcmp` | `or` | `xor`

Topics

"Truth Table for Logical Operations"
"Operator Precedence"

"MATLAB Operators and Special Characters"

Introduced before R2006a

notebook

(To be removed) Open MATLAB Notebook in Microsoft Word software (on Microsoft Windows platforms)

Note: `notebook` will be removed in a future version. Use the Live Editor instead.

Syntax

```
notebook
notebook('filename')
notebook('-setup')
```

Description

`notebook` starts Microsoft Word software and creates a new MATLAB Notebook titled `Document 1`.

Note: The `notebook` command is available only on Windows systems that have a 32–bit version of Microsoft Word installed. The `notebook` command is not available for 64–bit versions of Microsoft Word.

`notebook('filename')` starts Microsoft Word and opens the notebook `filename`, where `filename` is either in the MATLAB current folder or is a full path. If `filename` does not exist, MATLAB creates a new notebook titled `filename`. If the file name extension is not specified, MATLAB assumes `.doc`.

`notebook('-setup')` runs an interactive setup function for MATLAB Notebook. It copies the notebook template, `m-book.dot`, to the Microsoft Word template folder, whose location MATLAB automatically determines from the Windows system registry. Upon completion, MATLAB displays a message indicating whether or not the setup was successful.

See Also

Topics

"What Is a Live Script?"
"Options for Presenting Your Code"
"Create a MATLAB Notebook with Microsoft Word"

Introduced before R2006a

now

Current date and time as serial date number

Syntax

```
t = now
```

Description

`t = now` returns the current date and time as a serial date number. A serial date number represents the whole and fractional number of days from a fixed, preset date (January 0, 0000).

`floor(now)` returns the current date as a serial date number, and `rem(now,1)` returns the current time as a serial date number. `datestr(now)` returns the current date and time as text.

Examples

```
t1 = now, t2 = rem(now,1)
```

```
t1 =

   7.2908e+05


t2 =

    0.4013
```

Tips

- To return a datetime scalar representing the current date and time, type:

  ```
  t = datetime('now')
  ```

See Also

`clock` | `date` | `datenum` | `datestr` | `datetime`

Introduced before R2006a

nthroot

Real nth root of real numbers

Syntax

```
Y = nthroot(X,N)
```

Description

`Y = nthroot(X,N)` returns the real nth root of the elements of `X`. Both `X` and `N` must be real scalars or arrays of the same size. If an element in `X` is negative, then the corresponding element in `N` must be an odd integer.

Examples

Calculate Real Root of Negative Number

Find the real cube root of `-27`.

```
nthroot(-27, 3)
```

```
ans = -3
```

For comparison, also calculate `(-27)^(1/3)`.

```
(-27)^(1/3)
```

```
ans =
   1.5000 + 2.5981i
```

The result is the complex cube root of `-27`.

Calculate Several Real Roots of Scalar

Create a vector of roots to calculate, `N`.

```
N = [5 3 -1];
```

Use `nthroot` to calculate several real roots of `-8`.

```
Y = nthroot(-8,N)
```

```
Y =

   -1.5157   -2.0000   -0.1250
```

The result is a vector of the same size as `N`.

Elementwise Roots of Matrix

Create a matrix of bases, `X`, and a matrix of nth roots, `N`.

```
X = [-2 -2 -2; 4 -3 -5]
```

```
X =

    -2    -2    -2
     4    -3    -5
```

```
N = [1 -1 3; 1/2 5 3]
```

```
N =

    1.0000   -1.0000    3.0000
    0.5000    5.0000    3.0000
```

Each element in `X` corresponds to an element in `N`.

Calculate the real nth roots of the elements in `X`.

```
Y = nthroot(X,N)
```

```
Y =

   -2.0000   -0.5000   -1.2599
   16.0000   -1.2457   -1.7100
```

Except for the signs (which are treated separately), the result is comparable to `abs(X).^(1./N)`. By contrast, you can calculate the complex roots using `X.^(1./N)`.

Input Arguments

X — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. X can be either a scalar or an array of the same size as N. The elements of X must be real.

Data Types: single | double

N — Roots to calculate

scalar | array of same size as X

Roots to calculate, specified as a scalar or array of the same size as X. The elements of N must be real. If an element in X is negative, the corresponding element in N must be an odd integer.

Data Types: single | double

Tips

- While power is a more efficient function for computing the roots of numbers, in cases where both real and complex roots exist, power returns only the complex roots. In these cases, use nthroot to obtain the real roots.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`power` | `sqrt`

Introduced before R2006a

null

Null space

Syntax

```
Z = null(A)
Z = null(A,'r')
```

Description

`Z = null(A)` is an orthonormal basis for the null space of `A` obtained from the singular value decomposition. That is, `A*Z` has negligible elements, `size(Z,2)` is the nullity of `A`, and `Z'*Z = I`.

`Z = null(A,'r')` is a "rational" basis for the null space obtained from the reduced row echelon form. `A*Z` is zero, `size(Z,2)` is an estimate for the nullity of `A`, and, if `A` is a small matrix with integer elements, the elements of the reduced row echelon form (as computed using `rref`) are ratios of small integers.

The orthonormal basis is preferable numerically, while the rational basis may be preferable pedagogically.

Examples

Example 1

Compute the orthonormal basis for the null space of a matrix A.

```
A = [1     2     3
     1     2     3
     1     2     3];

Z = null(A);
```

```
A*Z

ans =
  1.0e-015 *
     0.2220    0.2220
     0.2220    0.2220
     0.2220    0.2220

Z'*Z

ans =
    1.0000   -0.0000
   -0.0000    1.0000
```

Example 2

Compute the 1-norm of the matrix A*Z and determine that it is within a small tolerance.

```
norm(A*Z,1) < 1e-12
ans =
    1
```

Example 3

Compute the rational basis for the null space of the same matrix A.

```
ZR = null(A,'r')

ZR =
    -2    -3
     1     0
     0     1

A*ZR

ans =

     0     0
     0     0
     0     0
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generated code might return a different basis than MATLAB
- Code generation does not support the rational basis option (second input).

See Also

`orth` | `rank` | `rref` | `svd`

Introduced before R2006a

numArgumentsFromSubscript

Number of arguments for customized indexing methods

Syntax

```
n = numArgumentsFromSubscript(obj,s,indexingContext)
```

Description

`n = numArgumentsFromSubscript(obj,s,indexingContext)` returns the number of expected inputs to `subsasgn` or the number of expected outputs from `subsref`.

Overload `numArgumentsFromSubscript` to describe the number of values to return from indexing expressions that return or assign to a comma-separated list. That is, indexing expression that end in `'{}'` or `'.'` indexing. The `numArgumentsFromSubscript` can:

- Access the indexing operations and indices used in the indexing expression.
- Determine if an indexing operation is made in the context of a reference statement, an expression passed to a function, or an assignment.

If a class overloads `numArgumentsFromSubscript`, MATLAB calls it to determine the number of array elements involved in an indexing operation when the number of elements is greater than one. For example, these `'.'` indexing operations generate a call to `numArgumentsFromSubscript`:

- `objArray.a` — Number of elements referenced in a statement (`Statement`)
- `func(objArray.a)` — Number of elements returned in an expression (`Expression`)
- `[objArray.a] = rhs` — Number of values assigned with a comma-separated list (`Assignment`)

MATLAB uses the calling context to determine when to apply the value returned by `numArgumentsFromSubscript`. Your implementation of `numArgumentsFromSubscript` can provide different outputs for the three types of indexing statements. For example, this overload of `numArgumentsFromSubscript`:

- Changes the expected number of output arguments from `subsref` for indexing expressions that are passed to functions.
- Uses the indexing substructure `s` to determine the number of arguments required by the indexing operation

```
function n = numArgumentsFromSubscript(obj,s,indexingContext)
   if indexingContext == matlab.mixin.util.IndexingContext.Expression
      n = 1;
   else
      n = length(s(1).subs{:});
   end
end
```

Implement the `subsref` method with a `varargout` output to enable MATLAB to call this method with the specified number of output arguments.

```
function varargout = subsref(obj,s)
   ...
end
```

Examples

Indexing with Character Array Keywords

Use words as indices for object properties.

By default, MATLAB treats each character in a character array as a separate element. Therefore, MATLAB interprets a character array index as multiple index values.

Without overloading `numArgumentsFromSubscript`, keyword indexing statements request too many arguments for `subsref` and `subsasgn` methods. To implement indexing that uses character arrays as a single keyword, define a `numArgumentsFromSubscript` method to return `1` as the number of elements referenced or assigned.

Overload `numArgumentsFromSubscript` to support the following kinds of indexed reference and assignment.

Index reference with character array:

```
obj{'keyword'}
```

Index reference in function argument:

```
func(obj{'keyword'})
```

Assign comma-separated list to object array:

```
[obj{'keyword'}] = right-side values;
```

In these cases, `subsref` and `subsasgn` cannot determine the number of required output and input arguments, respectively, from the calling context. Provide this information using the `numArgumentsFromSubscript` function.

Define the `KeyIndex` class with two properties. `KeyCell` stores key names. `DataArray` stores corresponding data. To customize indexing:

- Implement a `subsref` method that returns the data values that correspond to the specified keyword.
- Implement a `subsasgn` method that assigns the specified values to the corresponding element in `DataArray` properties.
- Overload `numArgumentsFromSubscript` to return a value of `1` or scalar objects and a value of `numel(objArray)` for object arrays.

Specify a cell array containing the names of months for the `KeyCell` property. Specify a numeric array of the snow fall for the corresponding months in the `DataArray` property.

```
snow15 = KeyIndex({'Jan','Feb','March'},[36 42 2])
```

```
snow15 =

  KeyIndex with properties:

      KeyCell: {'Jan'  'Feb'  'March'}
    DataArray: [36 42 2]
```

Reference the snow amount for a particular month using the keyword:

```
snow15{'Feb'}
```

```
ans =

    42
```

Assign to the corresponding element using `'{}'` indexing with the keyword:

```
snow15{'Feb'} = 52;
```

The value corresponding to the key `'Feb'` changes:

```
snow15{'Feb'}
```

```
ans =

    52
```

Create an array with the snow fall for 2 years:

```
snow14 = KeyIndex({'Jan','Feb','March'},[12 8 2]);
sTotal = [snow14,snow15];
```

Show the snow fall for both years for February:

```
sTotal{'Feb'}
```

```
ans =

     8


ans =

    52
```

Update the values of snow fall for both years for the month of February. Indexing into a cell array returns a comma-separated list:

```
c{1} = 34;
c{2} = 56;
[sTotal{'Feb'}] = c{:};
```

Here is the `KeyIndex` class. This class shows a particular programming technique. It does not include error checking and other features that your class can require.

```
classdef KeyIndex
   properties
      KeyCell
      DataArray
   end
   methods
      function obj = KeyIndex(key,data)
         if nargin > 0
            obj.KeyCell = key;
            obj.DataArray = data;
         end
      end
```

```
        function n = numArgumentsFromSubscript(obj,~,~)
           n = numel(obj);
        end
        function varargout = subsref(obj,s)
           a = numel(obj);
           switch s(1).type
              case '{}'
                 varargout = cell(1,a);
                 for j = 1:a
                    for k = 1:numel(obj(j).KeyCell)
                       if strcmp(s.subs(:),obj(j).KeyCell{k})
                          varargout{j} = obj(j).DataArray(k);
                       end
                    end
                 end
              case '.'
                 varargout = {builtin('subsref',obj,s)};
              case '()'
                 varargout = {builtin('subsref',obj,s)};
           end
        end
        function obj = subsasgn(obj,s,varargin)
           a = numel(varargin);
           switch s(1).type
              case '{}'
                 for j = 1:a
                    for k = 1:numel(obj(j).KeyCell)
                       if strcmp(s.subs(:),obj(j).KeyCell{k})
                          obj(j).DataArray(k) = varargin{j};
                       end
                    end
                 end
              case '.'
                 obj = builtin('subsasgn',obj,s,varargin{:});
              case '()'
                 obj = builtin('subsasgn',obj,s,varargin{:});
           end
        end
     end
  end
```

Reference Property Value Once Per Array

Define a class that supports per-element and per-array indexing for properties.

The `numArgumentsFromSubscript` function enables classes to customize references to specific properties. The indexing substructure argument (`s`) to `numArgumentsFromSubscript` contains the name of the property referenced in a dot indexing expression (that is, a reference of the form `obj.PropertyName`). Using the indexing substructure, `numArgumentsFromSubscript` can return a unique value for any given property.

The `PerArray` class uses the information in the indexing substructure to specify the number of outputs for each property reference.

Overload `numArgumentsFromSubscript` to return:

- A comma-separated list of values for the `ByElement` property, one value per array element
- A single value for the `ByArray` property for the entire array

Create an array of `PerArray` objects:

```
for k = 1:4
   pa(k) = PerArray(rand(k));
end
```

Query the `ByElement` property to return a comma-separated list of property values:

```
pa.ByElement
```

```
ans =

    0.7513


ans =

    0.2551    0.6991
    0.5060    0.8909


ans =

    0.9593    0.1493    0.2543
    0.5472    0.2575    0.8143
    0.1386    0.8407    0.2435
```

```
ans =

    0.9293    0.6160    0.5853    0.7572
    0.3500    0.4733    0.5497    0.7537
    0.1966    0.3517    0.9172    0.3804
    0.2511    0.8308    0.2858    0.5678
```

Query the `ByArray` property to return a single value for the array:

```
pa.ByArray
```

```
ans =

    3.1416
```

Here is the `PerArray` class. This class shows a particular programming technique. It does not include error checking and other features that your class can require.

```
classdef PerArray
   properties
      ByElement
   end
   properties (Constant)
      ByArray = pi;
   end
   methods
      function obj = PerArray(be)
         if nargin > 0
            obj.ByElement = be;
         end
      end
      function n = numArgumentsFromSubscript(obj,s,indexingContext)
         import matlab.mixin.util.IndexingContext
         if (indexingContext ~= IndexingContext.Assignment)
            if length(s) < 2
               switch (s.subs(:)')
                  case 'ByElement'
                     n = numel(obj);
                  case 'ByArray'
                     if strcmp(s(1).type,'.')
                        n = 1;
                     end
               end
            elseif length(s) > 1
```

```
            n = length([s(1).subs{:}]);
         end
      end
   end
   function varargout = subsref(obj,s)

      switch s(1).type
         case '.'
            varargout = cell(1,numel(obj));
            for k = 1:numel(obj)
               varargout{k} = obj(k).(s.subs(:));
            end
         case '()'
            if length([s(1).subs{:}]) > 1
               ind = [s(1).subs{:}];
               numInd = length(ind);
               varargout = cell(1,numInd);
               for k = 1:numInd
                  varargout{k} = obj(ind(k)).(s(2).subs(:));
               end
            else
               varargout = {builtin('subsref',obj,s)};
            end
      end
   end
  end
end
```

Input Arguments

`obj` — Object of overloading class

object

Object of overloading class used in the indexing operation. The class of this object determines which `subsref` or `subsasgn` method MATLAB calls as a result of an indexing operation.

`s` — Indexing structure

`struct`

Indexing structure or array of indexing structures containing information about the specific indexing expression. Each structure has two fields:

- `type` — Indexing expression can be `'()'`, `'{}'`, `'.'`
- `subs` — Subscript values (property name or cell array of index numbers)

Data Types: `struct`

`indexingContext` — Context in which result applies
`matlab.mixin.util.IndexingContext`

Context in which result applies, specified as one of these enumerations:

- `matlab.mixin.util.IndexingContext.Statement` — Indexed reference used as a statement (`obj.a`)
- `matlab.mixin.util.IndexingContext.Expression` — Indexed reference used as an argument to a function (`func(obj.a)`)
- `matlab.mixin.util.IndexingContext.Assignment` — Indexed assignment (`[obj.a] = x`).

Output Arguments

n — Number of arguments
scalar integer

Number of arguments returned by overloaded `subsref` or passed to overloaded `subsasgn`. Overload `numArgumentsFromSubscript` to return the values required by your class for various indexing scenarios.

Tips

- Overload `numArgumentsFromSubscript` instead of `numel` to control the results from overloaded `subsref` and `subsasgn`. Overloading `numArgumentsFromSubscript` can avoid errors caused by overloading `numel`.

See Also

See Also
`subsasgn` | `subsref`

Topics

"Number of Arguments for subsref and subsasgn"
"Modify nargout and nargin for Indexing Methods"

Introduced in R2015b

num2cell

Convert array to cell array with consistently sized cells

Syntax

```
C = num2cell(A)
C = num2cell(A,dim)
```

Description

`C = num2cell(A)` converts array `A` into cell array `C` by placing each element of `A` into a separate cell in `C`. Array `A` need not be numeric.

`C = num2cell(A,dim)` splits the contents of `A` into separate cells of `C`, where `dim` specifies which dimensions of `A` to include in each cell. `dim` can be a scalar or a vector of dimensions. For example, if `A` has 2 rows and 3 columns, then:

- `num2cell(A,1)` creates a 1-by-3 cell array `C`, where each cell contains a 2-by-1 column of `A`.
- `num2cell(A,2)` creates a 2-by-1 cell array `C`, where each cell contains a 1-by-3 row of `A`.
- `num2cell(A,[1 2])` creates a 1-by-1 cell array `C`, where the cell contains the entire array `A`.

Examples

Convert Arrays to Cell Array

Place all elements of a numeric array into separate cells.

```
a = magic(3)
```

```
a =

     8     1     6
```

```
     3     5     7
     4     9     2
```

```
c = num2cell(a)
```

```
c = 3×3 cell array
    [8]    [1]    [6]
    [3]    [5]    [7]
    [4]    [9]    [2]
```

Place individual letters of a word into separate cells of an array.

```
a = ['four';'five';'nine']
```

```
a = 3×4 char array
    'four'
    'five'
    'nine'
```

```
c = num2cell(a)
```

```
c = 3×4 cell array
    'f'    'o'    'u'    'r'
    'f'    'i'    'v'    'e'
    'n'    'i'    'n'    'e'
```

Create Cell Array of Numeric Arrays

Generate a 4-by-3-by-2 numeric array, and then create a 1-by-3-by-2 cell array of 4-by-1 column vectors.

```
A = reshape(1:12,4,3);
A(:,:,2) = A*10
```

```
A =

(:,:,1) =

     1     5     9
     2     6    10
     3     7    11
     4     8    12
```

```
(:,:,2) =

    10    50    90
    20    60   100
    30    70   110
    40    80   120
```

```
C = num2cell(A,1)
```

```
C = 1×3×2 cell array

(:,:,1) =

    [4×1 double]    [4×1 double]    [4×1 double]


(:,:,2) =

    [4×1 double]    [4×1 double]    [4×1 double]
```

Each 4-by-1 vector contains elements from along the *first* dimension of A:

```
C{1}
```

```
ans =

     1
     2
     3
     4
```

Create a 4-by-1-by-2 cell array of 1-by-3 numeric arrays.

```
C = num2cell(A,2)
```

```
C = 4×1×2 cell array

(:,:,1) =

    [1×3 double]
    [1×3 double]
```

```
    [1×3 double]
    [1×3 double]


(:,:,2) =

    [1×3 double]
    [1×3 double]
    [1×3 double]
    [1×3 double]
```

Each 1-by-3 row vector contains elements from along the *second* dimension of A:

```
C{1}
```

```
ans =

     1     5     9
```

Finally, create a 4-by-3 cell array of 1-by-1-by-2 numeric arrays.

```
C = num2cell(A,3)
```

```
C = 4×3 cell array
    [1×1×2 double]    [1×1×2 double]    [1×1×2 double]
    [1×1×2 double]    [1×1×2 double]    [1×1×2 double]
    [1×1×2 double]    [1×1×2 double]    [1×1×2 double]
    [1×1×2 double]    [1×1×2 double]    [1×1×2 double]
```

Each 1-by-1-by-2 vector contains elements from along the *third* dimension of A:

```
C{1}
```

```
ans =

(:,:,1) =

     1


(:,:,2) =
```

```
    10
```

Combine Across Multiple Dimensions

Create a cell array by combining elements into numeric arrays along several dimensions.

```
A = reshape(1:12,4,3);
A(:,:,2) = A*10
```

```
A =

(:,:,1) =

     1     5     9
     2     6    10
     3     7    11
     4     8    12


(:,:,2) =

    10    50    90
    20    60   100
    30    70   110
    40    80   120
```

```
c = num2cell(A,[1 3])
```

```
c = 1×3 cell array
    [4×1×2 double]    [4×1×2 double]    [4×1×2 double]
```

Each 4-by-1-by-2 array contains elements from along the first and third dimension of A:

```
c{1}
```

```
ans =

(:,:,1) =

     1
     2
     3
```

```
     4


(:,:,2) =

    10
    20
    30
    40
```

```
c = num2cell(A,[2 3])
```

```
c = 4×1 cell array
    [1×3×2 double]
    [1×3×2 double]
    [1×3×2 double]
    [1×3×2 double]
```

Input Arguments

A — Input

any type of multidimensional array

Input, specified as any type of multidimensional array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `cell` | `categorical` | `datetime` | `duration` | `calendarDuration` | `function_handle`

dim — Dimension of A

positive integer | positive vector of integers

Dimension of `A`, specified as a positive integer or a vector of positive integers. `dim` must be between 1 and `ndims(A)`.

Elements need not be in numeric order. However, `num2cell` permutes the dimensions of the arrays in each cell of `C` to match the order of the specified dimensions.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

C — Resulting array

cell array

Resulting array, returned as a cell array. The size of `C` depends on the size of `A` and the values of `dim`.

- If `dim` is not specified, then `C` is the same size as `A`.
- If `dim` is a scalar, then `C` contains `numel(A)/size(A,dim)` cells. If `dim` is 1 or 2, then each cell contains a column or row vector, respectively. If `dim` > 2, then each cell contains an array whose `dim`th dimensional length is `size(A,dim)`, and whose other dimensions are all singletons.

  For example, given a 4-by-7-by-3 array, `A`, this figure shows how `num2cell` creates cells corresponding to `dim` values of `1`, `2`, and `3`.

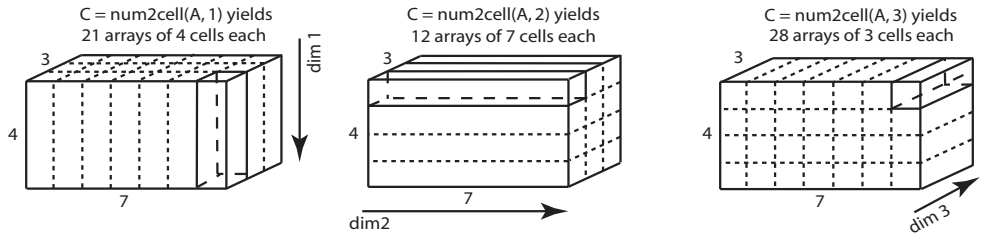

- If `dim` is a vector containing `N` values, then `C` has `numel(A)/prod([size(A,dim(1)),...,size(A,vdim(N))])` cells. Each cell contains an array whose `dim(i)`th dimension has a length of `size(A,dim(i))` and whose other dimensions are singletons.

  For example, given a 4-by-7-by-3 array, you can specify `dim` as an positive integer vector to create cell arrays of different dimensions.

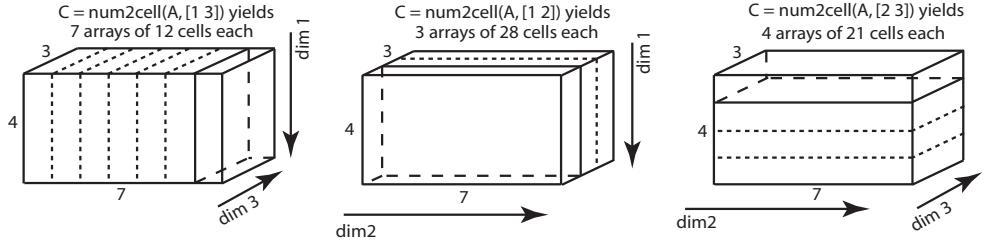

Data Types: `cell`

See Also

See Also

`cat` | `cell2mat` | `mat2cell`

Introduced before R2006a

num2hex

Convert singles and doubles to IEEE hexadecimal strings

Syntax

```
num2hex(X)
```

Description

If `X` is a single or double precision array with `n` elements, then `num2hex(X)` is an `n`-by-`8` or `n`-by-`16` character array in which each row contains the hexadecimal floating-point representation of a number. The same representation is printed with format `hex`.

Examples

```
num2hex([1 0 0.1 -pi Inf NaN])
```

returns

```
ans =

3ff0000000000000
0000000000000000
3fb999999999999a
c00921fb54442d18
7ff0000000000000
fff8000000000000
num2hex(single([1 0 0.1 -pi Inf NaN]))
```

returns

```
ans =

3f800000
00000000
3dcccccd
c0490fdb
```

```
7f800000
ffc00000
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`hex2num` | `dec2hex` | `format`

Introduced before R2006a

num2ruler

Convert numeric data for use with specific ruler

Syntax

```
data = num2ruler(num,ruler)
```

Description

`data = num2ruler(num,ruler)` converts the numeric values in `num` to the appropriate values for the specified ruler. The resulting values depend on both the type and limits of the `ruler` input. The output `data` is an array the same size as `num`.

Examples

Convert Numeric Value to Equivalent Date Value

Convert the output of `ginput` from a numeric value to the equivalent date value.

Create a plot with dates along the *x*-axis. Then, click a point in the axes and use the `ginput` function to return the location of the selected point.

```
t = datetime(2015,1,1:10);
y = rand(10,1);
plot(t,y)
ax = gca;
[x,y] = ginput(1)
```

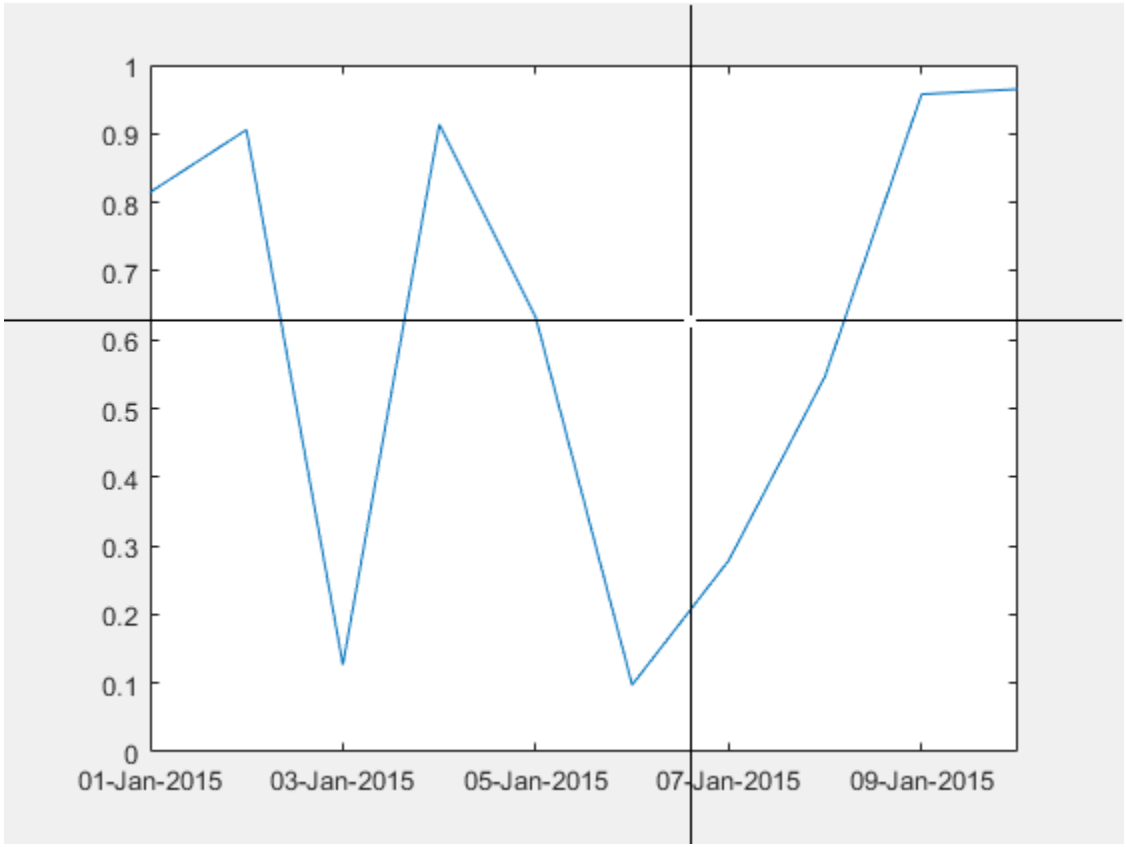


```
x =

    5.8168


y =

    0.6458
```

The `ginput` function returns the location as numeric values. Use `num2ruler` to determine the date value that is equivalent to the numeric value returned for `x`.

```
xdate = num2ruler(x,ax.XAxis)
```

```
xdate =
```

```
06-Jan-2015 19:36:13
```

Input Arguments

num — Numeric data

array

Numeric data, specified as an array.

Example: `num = [1 2 3]`

ruler — Ruler that determines data mapping

`DurationRuler` object | `DatetimeRuler` object | `NumericRuler` object

Ruler that determines data mapping, specified as one of these types of ruler objects:

- `DurationRuler` object — Convert the input `num` to duration values.
- `DatetimeRuler` object — Convert the input `num` to datetime values.
- `NumericRuler` object — No conversion. For this case, the output `data` is equal to the input `num`.

Specify the ruler object by referring to either the `XAxis`, `YAxis`, or `ZAxis` property of the `Axes` object.

```
ax = gca;
data = num2ruler(num,ax.XAxis)
```

See Also

See Also

`axes` | `datetime` | `duration` | `ruler2num`

Introduced in R2016b

num2str

Convert numbers to character array

Syntax

```
s = num2str(A)
s = num2str(A,precision)
s = num2str(A,formatSpec)
```

Description

`s = num2str(A)` converts a numeric array into a character array that represents the numbers. The output format depends on the magnitudes of the original values. `num2str` is useful for labeling and titling plots with numeric values.

`s = num2str(A,precision)` returns a character array that represents the numbers with the maximum number of significant digits specified by `precision`.

`s = num2str(A,formatSpec)` applies a format specified by `formatSpec` to all elements of `A`.

Examples

Default Conversions of Floating-Point Values

Convert the floating-point values returned by `pi` and `eps` to character vectors.

```
s = num2str(pi)
```

```
s =
'3.1416'
```

```
s = num2str(eps)
```

```
s =
```

```
'2.2204e-16'
```

Specify Precision

Specify the maximum number of significant digits for floating-point values.

```
A = gallery('normaldata',[2,2],0);
s = num2str(A,3)
```

```
s = 2×16 char array
    '-0.433     0.125'
    ' -1.67     0.288'
```

Specify Formatting

Specify the width, precision, and other formatting for an array of floating-point values.

```
A = gallery('uniformdata',[2,3],0) * 9999;
s = num2str(A,'%10.5e\n')
```

```
s = 2×35 char array
    '9.50034e+03'
    '6.06782e+03'
    '8.91210e+03'
    '2.31115e+03'
    '4.85934e+03'
    '7.62021e+03'
```

The format `'%10.5e'` prints each value in exponential format with five decimal places, and `'\n'` prints a new line character.

Input Arguments

A — Input array

numeric array

Input array, specified as a numeric array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Complex Number Support: Yes

`precision` — Maximum number of significant digits

positive integer

Maximum number of significant digits in the output string, specified as a positive integer.

Note: If you specify `precision` to exceed the precision of the input floating-point data type, the results might not match the input values to the precision you specified. The result depends on your computer hardware and operating system.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`formatSpec` — Format of output fields

formatting operators

Format of the output fields, specified using formatting operators. `formatSpec` also can include ordinary text and special characters.

`formatSpec` can be a character vector in single quotes, or, starting in R2016b, a string scalar.

Formatting Operator

A formatting operator starts with a percent sign, `%`, and ends with a conversion character. The conversion character is required. Optionally, you can specify identifier, flags, field width, precision, and subtype operators between `%` and the conversion character. (Spaces are invalid between operators and are shown here only for readability).

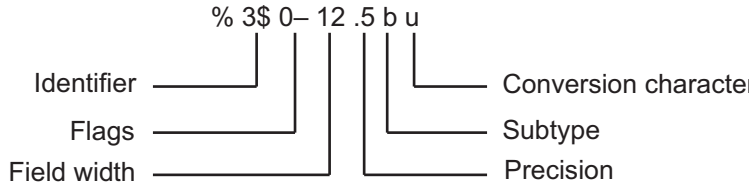

Conversion Character

This table shows conversion characters to format numeric and character data as text.

Value Type	Conversion	Details
Integer, signed	`%d` or `%i`	Base 10
Integer, unsigned	`%u`	Base 10
	`%o`	Base 8 (octal)
	`%x`	Base 16 (hexadecimal), lowercase letters `a`–`f`
	`%X`	Same as `%x`, uppercase letters `A`–`F`
Floating-point number	`%f`	Fixed-point notation (Use a precision operator to specify the number of digits after the decimal point.)
	`%e`	Exponential notation, such as `3.141593e+00` (Use a precision operator to specify the number of digits after the decimal point.)
	`%E`	Same as `%e`, but uppercase, such as `3.141593E+00` (Use a precision operator to specify the number of digits after the decimal point.)
	`%g`	The more compact of `%e` or `%f`, with no trailing zeros (Use a precision operator to specify the number of significant digits.)
	`%G`	The more compact of `%E` or `%f`, with no trailing zeros (Use a precision operator to specify the number of significant digits.)
Characters or strings	`%c`	Single character
	`%s`	Character vector or string array. The type of the output text is the same as the type of `formatSpec`.

Optional Operators

The optional identifier, flags, field width, precision, and subtype operators further define the format of the output text.

- **Identifier**

  Order for processing the function input arguments. Use the syntax *n*$, where *n* represents the positions of the other input arguments in the function call.

  Example: `('%3$s %2$s %1$s %2$s','A','B','C')` prints input arguments `'A'`, `'B'`, `'C'` as follows: `C B A B`.

  Note: If an input argument is an array, you cannot use identifiers to specify particular array elements from that input argument.

- **Flags**

`'–'`	Left-justify. **Example:** `%-5.2f` **Example:** `%-10s`
`'+'`	Always print a sign character (+ or –) for any numeric value. **Example:** `%+5.2f` Right-justify text. **Example:** `%+10s`
`' '`	Insert a space before the value. **Example:** `% 5.2f`
`'0'`	Pad to field width with zeros before the value. **Example:** `%05.2f`
`'#'`	Modify selected numeric conversions: • For `%o`, `%x`, or `%X`, print `0`, `0x`, or `0X` prefix. • For `%f`, `%e`, or `%E`, print decimal point even when precision is 0. • For `%g` or `%G`, do not remove trailing zeros or decimal point. **Example:** `%#5.0f`

- **Field Width**

  Minimum number of characters to print. The field width operator can be a number, or an asterisk (`*`) to refer to an input argument.

  Example: The input arguments `('%12d',intmax)` are equivalent to `('%*d', 12, intmax)`.

The function pads to field width with spaces before the value unless otherwise specified by flags.

- **Precision**

For `%f`, `%e`, or `%E`	Number of digits to the right of the decimal point **Example:** `'%.4f'` prints `pi` as `'3.1416'`
For `%g` or `%G`	Number of significant digits **Example:** `'%.4g'` prints `pi` as `' 3.142'`

The precision operator can be a number, or an asterisk (`*`) to refer to an argument.

Example: The input arguments `('%6.4f', pi)` are equivalent to `('%*.*f', 6, 4, pi)`.

Note: If you specify a precision operator for floating-point values that exceeds the precision of the input numeric data type, the results might not match the input values to the precision you specified. The result depends on your computer hardware and operating system.

- **Subtypes**

You can use a subtype operator to print a floating-point value as its octal, decimal, or hexadecimal value. The subtype operator immediately precedes the conversion character. This table shows the conversions that can use subtypes.

Input Value Type	Subtype and Conversion Character	Output Value Type

Floating-point number	`%bx` or `%bX`
	`%bo`
	`%bu`
		Double-precision hexadecimal, octal, or decimal value
		Example: `%bx` prints `pi` as `400921fb54442d18`

	`%tx` or `%tX`
	`%to`
	`%tu`
		Single-precision hexadecimal, octal, or decimal value
		Example: `%tx` prints `pi` as `40490fdb`

Text Before or After Formatting Operators

`formatSpec` can also include additional text before a percent sign, `%`, or after a conversion character. The text can be:

- Ordinary text to print.
- Special characters that you cannot enter as ordinary text. This table shows how to represent special characters in `formatSpec`.

Special Character	Representation
Single quotation mark	`''`
Percent character	`%%`
Backslash	`\\`
Alarm	`\a`
Backspace	`\b`
Form feed	`\f`
New line	`\n`
Carriage return	`\r`
Horizontal tab	`\t`
Vertical tab	`\v`

Character whose Unicode numeric value can be represented by the hexadecimal number, `N`	`\xN`
	
	Example:
	`sprintf('\x5A')` returns `'Z'`

Character whose Unicode numeric value can be represented by the octal number, `N`	`\N`
	
	Example:
	`sprintf('\132')` returns `'Z'`

Notable Behavior of Conversions with Formatting Operators

- Numeric conversions print only the real component of complex numbers.
- If you specify a conversion that does not fit the data, such as a text conversion for a numeric value, MATLAB overrides the specified conversion, and uses `%e`.

Example: `'%s'` converts `pi` to `3.141593e+00`.

- If you apply a text conversion (either `%c` or `%s`) to integer values, MATLAB converts values that correspond to valid character codes to characters.

  Example: `'%s'` converts `[65 66 67]` to `ABC`.

Data Types: `char` | `string`

Output Arguments

s — Text representation of input array
character array

Text representation of the input array, returned as a character array.

Tips

`num2str` does not accept positional identifiers in the `formatSpec` input argument. For example, `num2str([14 15],'%2$X %1$o)` returns an error.

Positional identifiers specify the order in which the formatting operator processes input arguments of the function, not the elements of an input array. When you call `num2str`, there is only one input argument that has numbers to convert.

Algorithms

`num2str` trims any leading spaces from a character array, even when `formatSpec` includes a space character flag. For example, `num2str(42.67,'% 10.2f')` returns a 1-by-5 character array `'42.67'`.

See Also

See Also

`cast` | `int2str` | `mat2str` | `sprintf` | `str2num`

Introduced before R2006a

numberOfStrips

Class: Tiff

Total number of strips in image

Syntax

```
numStrips = numberOfStrips(tiffobj)
```

Description

`numStrips = numberOfStrips(tiffobj)` returns the total number of strips in the image.

Examples

Determine Number of Strips in Image

Determine the number of strips in the second image of a file.

Create a `Tiff` object associated with the example file, `example.tif`.

```
t = Tiff('example.tif','r');
```

When the `Tiff` object is created, the first image in the file is the current image file directory.

Make the second image the current directory.

```
nextDirectory(t)
```

Get the number of strips in the image if the image has a stripped organization.

```
if ~isTiled(t)
 numStrips = numberOfStrips(t)
end
```

```
numStrips = 7
```

The image has 7 strips.

Close the `Tiff` object.

```
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFNumberOfStrips` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.numberOfTiles | Tiff.isTiled

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

numberOfTiles

Class: Tiff

Total number of tiles in image

Syntax

```
numTiles = numberOfTiles(tiffobj)
```

Description

`numTiles = numberOfTiles(tiffobj)` returns the total number of tiles in the image.

Examples

Determine Number of Tiles in Image

Create a `Tiff` object associated with the example file, `example.tif`. Get the number of tiles in the image if the image has a tiled organization.

```
t = Tiff('example.tif','r');
if isTiled(t)
 nTiles = numberOfTiles(t)
end
```

```
nTiles = 110
```

The image has 110 tiles.

Close the `Tiff` object.

```
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"

- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFNumberOfTiles` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.numberOfStrips | Tiff.isTiled

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

numel

Number of array elements

Syntax

```
n = numel(A)
```

Description

`n = numel(A)` returns the number of elements, `n`, in array `A`, equivalent to `prod(size(A))`.

Examples

Number of Elements in 3-D Matrix

Create a 4-by-4-by-2 matrix.

```
A = magic(4);
A(:,:,2) = A'
```

```
A =

(:,:,1) =

    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1


(:,:,2) =

    16     5     9     4
     2    11     7    14
     3    10     6    15
    13     8    12     1
```

`numel` counts 32 elements in the matrix.

```
n = numel(A)
```

```
n = 32
```

Number of Elements in Cell Array

Create a cell array of character vectors.

```
A = {'dog','cat','fish','horse'};
```

`numel` counts 4 elements in the array.

```
n = numel(A)
```

```
n = 4
```

Number of Elements in Table

Create a table with four variables listing patient information for five people.

```
LastName = {'Smith';'Johnson';'Williams';'Jones';'Brown'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];
```

```
A = table(Age,Height,Weight,BloodPressure,'RowNames',LastName)
```

```
A = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Smith       38     71        176       124      93
    Johnson     43     69        163       109      77
    Williams    38     64        131       125      83
    Jones       40     67        133       117      75
    Brown       49     64        119       122      80
```

Find the number of elements in the table.

```
n = numel(A)
```

```
n = 20
```

`numel` returns a value equivalent to `prod(size(A))` corresponding to the 5 rows and 4 variables.

Input Arguments

A — Input array
scalar | vector | matrix | multidimensional array | table | timetable

Input array, specified as a scalar, vector, matrix, multidimensional array, table, or timetable.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `cell` | `table` | `timetable` | `categorical` | `datetime` | `duration` | `calendarDuration`

Limitations

- If `A` is a table, `numel` returns the number of elements in the table, `A`, equivalent to `prod(size(A))`. Variables in a table can have multiple columns, but `numel(A)` only accounts for the number of rows and number of variables.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`prod` | `size` | `subsref`

Topics

"Modify nargout and nargin for Indexing Methods"

Introduced before R2006a

NumericRuler Properties

Control axis with numeric values

Description

`NumericRuler` properties control the appearance and behavior of an *x*-axis, *y*-axis, or *z*-axis that shows numeric values. Each individual axis has its own ruler object. By changing property values of the ruler, you can modify certain aspects of a specific axis.

Use dot notation to refer to a particular ruler and property. Access the ruler objects through the `XAxis`, `YAxis`, and `ZAxis` properties of the `Axes` object.

```
ax = gca;
co = ax.XAxis.Color;
ax.XAxis.Color = 'blue';
```

Appearance

`Color` — Color of axis line and labels

RGB triplet | character vector of a color name | `'none'`

Color of the axis line and labels, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the axis is invisible.

Example: `ax.XAxis.Color = 'red';`

Example: `ax.YAxis.Color = [0.1 0.7 0.8];`

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`

Long Name	Short Name	RGB Triplet
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Note: The `Color` property for the ruler and the associated `XColor`, `YColor`, or `ZColor` property for the parent axes always have the same value. Setting one also sets the other.

`LineWidth` — Width of axis line and tick marks

`0.5` (default) | positive value

Width of axis line and tick marks, specified as a positive value in point units. One point equals 1/72 inch.

Example: `ax.XAxis.LineWidth = 2;`

Note: Setting the `LineWidth` property for the parent axes sets the `LineWidth` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

`Label` — Axis label

text object (default)

Axis label, which is a text object. To display text or change existing text, set the `String` property for the text object. Use other properties to change the text appearance, such as the font style or color.

```
ax = gca;
ax.XAxis.Label.String = 'X Axis';
ax.XAxis.Label.FontSize = 12;
```

For a full list of options, see Text Properties.

Alternatively, add or modify the axis labels using the `xlabel`, `ylabel`, and `zlabel` functions.

Note: The text object is not a child of the ruler object, so it cannot be returned by `findobj` and it does not use the default text property values.

`Visible` — Axis visibility

`'on'` (default) | `'off'`

Axis visibility, specified as one of these values:

- `'on'` — Display the axis.
- `'off'` — Hide the axis without deleting it. You still can access properties of an invisible axis using the ruler object.

Example: `ax.XAxis.Visible = 'off';`

Scale and Direction

`Limits` — Minimum and maximum axis limits

`[0 1]` (default) | two-element vector of the form `[min max]`

Minimum and maximum axis limits, specified as a two-element vector of the form `[min max]`.

If you assign a value to this property, then MATLAB sets the associated mode to `'manual'`.

Alternatively, set the limits using the `xlim`, `ylim`, and `zlim` functions.

Note: The `Limits` property for the ruler and the associated `XLim`, `YLim`, or `ZLim` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.Limits = [-10 10];`

`LimitsMode` — Selection mode for `Limits` property

`'auto'` (default) | `'manual'`

Selection mode for the `Limits` property, specified as one of these values:

- `'auto'` — Automatically select the axis limits based on the data plotted.
- `'manual'` — Use axis limit values that you specify. To specify the axis limits, set the `Limits` property.

Note: The `LimitsMode` property for the ruler and the associated `XLimMode`, `YLimMode`, or `ZLimMode` property for the parent axes always have the same value. Setting one also sets the other.

`Scale` — Scale of values along axis

`'linear'` (default) | `'log'`

Scale of values along axis, specified as `'linear'` or `'log'`.

Note: The `Scale` property for the ruler and the associated `XScale`, `YScale`, or `ZScale` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.Scale = 'log';`

`Direction` — Direction of increasing values

`'normal'` (default) | `'reverse'`

Direction of increasing values, specified as one of these values:

- `'normal'` — Values increase from left to right or bottom to top.
- `'reverse'` — Values increase from right to left or top to bottom.

Note: The `Direction` property for the ruler and the associated `XDir`, `YDir`, or `ZDir` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.Direction = 'reverse';`

Tick Values and Labels

`TickValues` — Tick mark locations along the axis

[ ] (default) | vector of increasing values

Tick mark locations along the axis, specified as a vector of increasing values.

Example: `ax.XAxis.TickValues = [2 4 6 8 10];`

Example: `ax.XAxis.TickValues = 0:10:100;`

If you assign a value to this property, then MATLAB sets the `TickValuesMode` property to `'manual'`.

Alternatively, use the `xticks`, `yticks`, and `zticks` functions.

Note: The `TickValues` property for the ruler and the associated `XTick`, `YTick`, or `ZTick` property for the parent axes always have the same value. Setting one also sets the other.

`TickValuesMode` — Selection mode for `TickValues` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickValues` property, specified as one of these values:

- `'auto'` — Automatically select the tick values based on the data plotted.
- `'manual'` — Use tick values that you specify. To specify the values, set the `TickValues` property.

Note: The `TickValuesMode` property for the ruler and the associated `XTickMode`, `YTickMode`, or `ZTickMode` property for the parent axes always have the same value. Setting one also sets the other.

`Exponent` — Exponential notation common to all tick values

integer value

Exponential notation common to all tick values, specified as an integer value. The axis displays an exponent label showing the base and exponent value, for example:

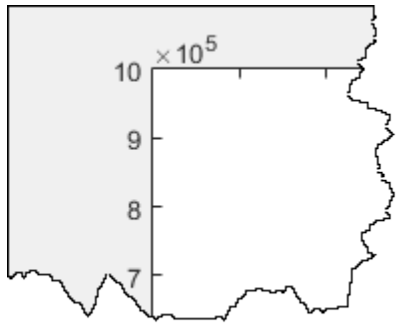

The base value is always 10. However, you can change the exponent value by setting the `Exponent` property. For example, change the exponent to 2.

```
ax = gca;
ax.YAxis.Exponent = 2;
```

If the exponent value is `0`, then the exponent label does not display.

If you assign a value to this property, then MATLAB sets the `ExponentMode` property to `'manual'`.

`ExponentMode` — Selection mode for `Exponent` property

`'auto'` (default) | `'manual'`

Selection mode for the `Exponent` property, specified as one of these values:

- `'auto'` — Automatically select the exponent value based on the axis limits.
- `'manual'` — Use an exponent value that you specify. To specify the value, set the `Exponent` property.

`TickLabels` — Tick mark labels

`''` (default) | cell array of character vectors | string array

Tick mark labels, specified as a cell array of character vectors or a string array. If you do not specify enough labels for all of the tick values, then the labels repeat. The labels support TeX and LaTeX markup. See the `TickLabelInterpreter` property for more information.

Example: `ax.XAxis.TickLabels = {'January','February','March','April','May'}';`

Example: `ax.YAxis.TickLabels = {'\pi','2\pi','3\pi'}'`

If you set this property, then MATLAB sets the `TickLabelsMode` property to `'manual'`.

Alternatively, specify the tick labels using the `xticklabels`, `yticklabels`, and `zticklabels` functions.

Note: The `TickLabels` property for the ruler and the associated `XTickLabel`, `YTickLabel`, or `ZTickLabel` property for the parent axes always have the same value. Setting one also sets the other.

Data Types: `char` | `string`

`TickLabelsMode` — Selection mode for `TickLabels` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickLabels` property, specified as one of these values:

- `'auto'` — Automatically select the tick labels.
- `'manual'` — Use tick labels that you specify. To specify the labels, set the `TickLabels` property.

Note: The `TickLabelsMode` property for the ruler and the associated `XTickLabelMode`, `YTickLabelMode`, or `ZTickLabelMode` property for the parent axes always have the same value. Setting one also sets the other.

`TickLabelInterpreter` — Interpretation of tick label characters

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of tick label characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

Note: Setting the `TickLabelInterpreter` property for the parent axes sets the `TickLabelInterpreter` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.TickLabelInterpreter = 'latex';`

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the text type and color, and include special characters in the text.

This table lists the supported modifiers with the `TickLabelInterpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the text within the curly braces `{}`.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (rarely available)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Set `specifier` as the name of a font family to change the font style. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Set `specifier` as a scalar numeric value to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`

Modifier	Description	Example
`\color[rgb] {specifier}`	Set `specifier` as a three-element RGB triplet to change the font color.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒
`\lambda`	λ	`\Phi`	Φ	`\downarrow`	↓
`\mu`	μ	`\Psi`	Ψ	`\circ`	°
`\nu`	ν	`\Omega`	Ω	`\pm`	±
`\xi`	ξ	`\forall`	∀	`\geq`	≥
`\pi`	π	`\exists`	∃	`\propto`	∝
`\rho`	ρ	`\ni`	∋	`\partial`	∂
`\sigma`	σ	`\cong`	≅	`\bullet`	•
`\varsigma`	ς	`\approx`	≈	`\div`	÷

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	′
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `TickLabelInterpreter` property to `'latex'`. Use dollar symbols around the labels, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$\int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup within the text. The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this is reduced by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

`TickLabelFormat` — Tick label format and decimal precision

character vector of numeric format

Tick label format and decimal precision, specified as a character vector of numeric format. For example, you can display the tick labels in a currency format, control the number of decimals that appear in each label, or add text after all the labels.

Example: `ax.XAxis.TickLabelFormat = '%g%%';` displays a percent sign after all the tick labels.

This table lists some common formats and the associated character vector.

Common Format	Character Vector to Use	Examples of Resulting Format

Currency — Display dollar sign before values, use two decimal places, and use commas.	`'$%,.2f'`	`$0.01`
		`$1.00`
		`$1,000.00`

Temperatures — Display degree symbol after values.	`'%g\\circ'`	`0.01°`
		`1°`
		`1000°`

Percentages — Display percent sign after values.	`'%g%%'`	`0.01%`
		`1%`
		`1000%`

Commas — Display commas in the thousandth place.	`'%,g'`	`0.01`
		`1`
		`1,000`

Alternatively, specify the tick label format using the `xtickformat`, `ytickformat`, and `ztickformat` functions.

Custom Format

If none of the formats mentioned in the table gives your desired format, then create a custom character vector of identifiers.

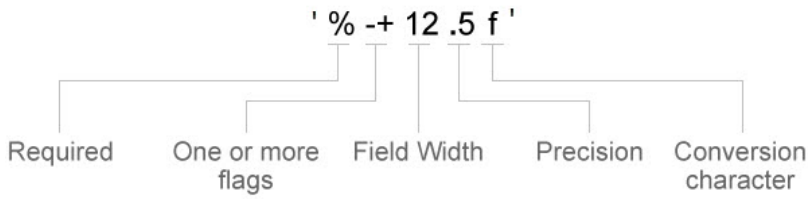

Identifiers are optional, except the percent sign and conversion character. Construct the format in this order:

- One or more flags — Options such as adding a plus sign before positive values. For a full list of options, see the table of Optional Flags.
- Field width — Minimum number of characters to print in the tick label. Specify the field width as an integer value. If the number of significant digits in the tick value is smaller than the field width, then the label is padded with spaces.
- Precision — Number of digits to the right of the decimal point or the number of significant digits, depending on the conversion character. Specify the precision as an integer value.
- Conversion character — Value type. For a full list of options, see the table of Conversion Characters. If you specify a conversion that does not fit the data, MATLAB overrides the specified conversion and uses `%e`.

Also, you can specify literal text at the beginning or end of the format. To print a single quotation mark, use `''`. To print a percent character, use `%%`.

- `'$%.2f'` — Display a dollar sign before each value and use fixed-point notation with two decimal values.
- `'%.3f Million'` — Display `Million` after each value and use fixed-point notation with three decimal values.

Optional Flags

Identifier	Description	Example of Numeric Format
`,`	Display commas every three digits, such as `'1,000'`.	`'%,4.4g'`
`+`	Print the sign character (+) for positive values, such as `'+100'`.	`'%+4.4g'`
`0`	Pad the field width with leading zeros instead of spaces, such as `'0100'`.	`'%04.4g'`
`–`	Left-justify, which pads the end of the value with spaces instead of the beginning. For example, if the field	`'%-4.4g'`

Identifier	Description	Example of Numeric Format
	width is 4, then this flag formats the label as `'100 '` instead of `' 100'`.	
#	For the `%f`, `%e`, and `%g` conversion characters, print the decimal point even when the precision is 0, such as `'100.'`. For `%g`, do not remove trailing zeros.	`'%#4.4g'`

Conversion Characters

Identifier	Description	Example
`d` or `i`	Signed integer with base 10. The precision value indicates the number of significant digits.	`'%.4d'` displays π as `0003`.
`f`	Fixed-point notation. The precision value indicates the number of decimal places.	`'%.4f'` displays π as `3.1416`.
`e`	Exponential notation. The precision value indicates the number of decimal places.	`'%.4e'` displays π as 3.1416×10^0.
`g`	The more compact version of `e` or `f`, with no trailing zeros. The precision value indicates the maximum number of decimal places.	`'%.4g'` displays π as `3.1416`.

`TickLabelRotation` — Rotation of tick labels

scalar value in degrees

Rotation of tick labels, specified as a scalar value in degrees. Positive values give counterclockwise rotation. Negative values give clockwise rotation.

Alternatively, you can rotate the tick labels using the `xtickangle`, `ytickangle`, and `ztickangle` functions.

Note: The `TickLabelRotation` property for the ruler and the associated `XTickLabelRotation`, `YTickLabelRotation`, or `ZTickLabelRotation` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.TickLabelRotation = 45;`

Example: `ax.YAxis.TickLabelRotation = -45;`

`TickLabelRotationMode` — Selection mode for `TickLabelRotation` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickLabelRotation` property, specified as one of these values:

- `'auto'` — Automatically select the tick label rotation.
- `'manual'` — Use a tick label rotation that you specify. To specify the rotation, set the `TickLabelRotation` property.

`TickDirection` — Tick mark direction

`'in'` (default) | `'out'` | `'both'`

Tick mark direction, specified as one of these values:

- `'in'` — Direct the tick marks inward from the axis lines. This is the default for 2-D views.
- `'out'` — Direct the tick marks outward from the axis lines. This is the default for 3-D views.
- `'both'` — Center the tick marks over the axis lines.

If you assign a value to this property, then MATLAB sets the `TickDirectionMode` property to `'manual'`.

Note: Setting the `TickDir` property for the parent axes sets the `TickDirection` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.YAxis.TickDirection = 'out';`

`TickDirectionMode` — Selection mode for `TickDirection` property

`'auto'` (default) | `'manual'`

Selection mode for the `TickDirection` property, specified as one of these values:

- `'auto'` — Automatically select the tick direction.
- `'manual'` — Use a tick direction that you specify. To specify the tick direction, set the `TickDirection` property.

`TickLength` — Tick mark length

two-element vector

Tick mark length, specified as a two-element vector of the form `[2Dlength 3Dlength]`. The first element is the tick mark length in 2-D views. The second element is the tick mark length in 3-D views. Specify the values in units normalized relative to the longest axes dimension.

Note: Setting the `TickLength` property for the parent axes sets the `TickLength` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.YAxis.TickLength = [0.02 0.035];`

`MinorTick` — Minor tick mark display

`'off'` (default) | `'on'`

Minor tick mark display, specified as one of these values:

- `'off'` — Do not display minor tick marks. This is the default value for an axis with a linear scale.
- `'on'` — Display minor tick marks between the major tick marks on the axis. This is the default value for an axis with a log scale. The space between the major tick marks determines the number of minor tick marks. If the `MinorTickValues` property is set to empty `[]`, then no minor tick marks appear. Specify the tick mark locations by setting the `MinorTickValues` property.

Note: The `MinorTick` property for the ruler and the associated `XMinorTick`, `YMinorTick`, or `ZMinorTick` property for the parent axes always have the same value. Setting one also sets the other.

Example: `ax.XAxis.MinorTick = 'on';`

`MinorTickValues` — Minor tick mark locations

`[ ]` (default) | vector of increasing values

Minor tick mark locations, specified as a vector of increasing values.

Example: `ax.XAxis.MinorTickValues = [0 0.5 1 1.5 2 2.5];`

Example: `ax.YAxis.MinorTickValues = 0:5:100;`

If you assign values to this property, then MATLAB sets the `MinorTickValuesMode` property to `'manual'`.

`MinorTickValuesMode` — Selection mode for `MinorTickValues` property

`'auto'` (default) | `'manual'`

Selection mode for the `MinorTickValues` property, specified as one of these values:

- `'auto'` — Use automatically calculated minor tick values.
- `'manual'` — Use minor tick values that you specify. To specify the values, set the `MinorTickValues` property.

Font

`FontName` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as a system supported font name or `'FixedWidth'`. The default font depends on the specific system and locale. To use a fixed-width font that renders well, specify `'FixedWidth'`. The actual fixed-width font used depends on the `FixedWidthFontName` property of the root object.

Note: Setting the `FontName` property for the parent axes sets the `FontName` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontName = 'Cambria';`

`FontSize` — Font size

`10` (default) | scalar numeric value

Font size, specified as a scalar numeric value.

Note: Setting the `FontSize` property for the parent axes sets the `FontSize` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontSize = 12;`

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font.
- `'bold'` — Thicker character outlines than normal.

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: Setting the `FontWeight` property for the parent axes sets the `FontWeight` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontWeight = 'bold';`

`FontAngle` — Text character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font can look the same as the normal font.

Note: Setting the `FontAngle` property for the parent axes sets the `FontAngle` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontAngle = 'italic';`

`FontSmoothing` — Text antialiasing

`'on'` (default) | `'off'`

Text smoothing, specified as one of these values:

- `'on'` — Enable text antialiasing to reduce the jagged appearance of text characters and make the text easier to read. In certain cases, smoothed text blends against the background color and can make the text appear blurry.
- `'off'` — Disable text antialiasing. Use this setting if the text seems blurry.

Note: Setting the `FontSmoothing` property for the parent axes sets the `FontSmoothing` property for the ruler to the same value. However, setting the ruler property does not set the axes property. To prevent the axes property value from overriding the ruler property value, set the axes value first, and then set the ruler value.

Example: `ax.XAxis.FontSmoothing = 'off';`

Parent/Child

`Parent` — Ruler parent

`Axes` object

Ruler parent, specified as an `Axes` object.

Note: Ruler objects are not listed in the `Children` property of the parent `Axes` object.

`Children` — Ruler children

empty `GraphicsPlaceholder` array

The ruler has no children. You cannot set this property.

See Also

See Also

Axes Properties

Introduced in R2015b

nzmax

Amount of storage allocated for nonzero matrix elements

Syntax

```
n = nzmax(S)
```

Description

`n = nzmax(S)` returns the amount of storage allocated for nonzero elements in sparse matrix `S`. For sparse matrices, `nzmax(S) >= 1`.

- If `S` is a full matrix, then `nzmax(S)` is equal to `prod(size(S))`.

Often, `nnz(S)` and `nzmax(S)` are the same. But if `S` is created by an operation which produces fill-in matrix elements, such as sparse matrix multiplication or sparse LU factorization, then more storage might be allocated than is actually required, and `nzmax(S)` reflects this. Alternatively, `sparse(i,j,s,m,n,nzmax)` or its simpler form, `spalloc(m,n,nzmax)`, can set `nzmax` in anticipation of later fill-in.

See Also

`find` | `isa` | `nnz` | `nonzeros` | `size` | `whos`

Introduced before R2006a

ode15i

Solve fully implicit differential equations — variable order method

Syntax

```
[t,y] = ode15i(odefun,tspan,y0,yp0)
[t,y] = ode15i(odefun,tspan,y0,yp0,options)
[t,y,te,ye,ie] = ode15i(odefun,tspan,y0,yp0,options)
sol = ode15i( ___ )
```

Description

`[t,y] = ode15i(odefun,tspan,y0,yp0)`, where `tspan = [t0 tf]`, integrates the system of differential equations $f(t,y,y') = 0$ from `t0` to `tf` with initial conditions `y0` and `yp0`. Each row in the solution array `y` corresponds to a value returned in column vector `t`.

`[t,y] = ode15i(odefun,tspan,y0,yp0,options)` also uses the integration settings defined by `options`, which is an argument created using the `odeset` function. For example, use the `AbsTol` and `RelTol` options to specify absolute and relative error tolerances, or the `Jacobian` option to provide the Jacobian matrix.

`[t,y,te,ye,ie] = ode15i(odefun,tspan,y0,yp0,options)` additionally finds where functions of `(t,y,y')`, called event functions, are zero. In the output, `te` is the time of the event, `ye` is the solution at the time of the event, and `ie` is the index of the triggered event.

For each event function, specify whether the integration is to terminate at a zero and whether the direction of the zero crossing matters. Do this by setting the `'Events'` property to a function, such as `myEventFcn` or `@myEventFcn`, and creating a corresponding function: [`value`,`isterminal`,`direction`] = `myEventFcn`(`t`,`y`,`yp`). For more information, see “ODE Event Location”.

`sol = ode15i( ___ )` returns a structure that you can use with `deval` to evaluate the solution at any point on the interval `[t0 tf]`. You can use any of the input argument combinations in previous syntaxes.

Examples

Solve Weissinger Implicit ODE

Use `decic` to compute consistent initial conditions for the Weissinger implicit ODE. `decic` holds fixed the initial value for *y(t0)* and computes a consistent initial value for *y'(t0)*. The `weissinger` function evaluates the residual of the implicit ODE.

```
t0 = 1;
y0 = sqrt(3/2);
yp0 = 0;
[y0,yp0] = decic(@weissinger,t0,y0,1,yp0,0);
```

Use the result returned by `decic` with `ode15i` to solve the ODE. Plot the numerical solution, `y`, against the analytical solution, `ytrue`.

```
[t,y] = ode15i(@weissinger,[1 10],y0,yp0);
ytrue = sqrt(t.^2 + 0.5);
plot(t,y,t,ytrue,'o')
```

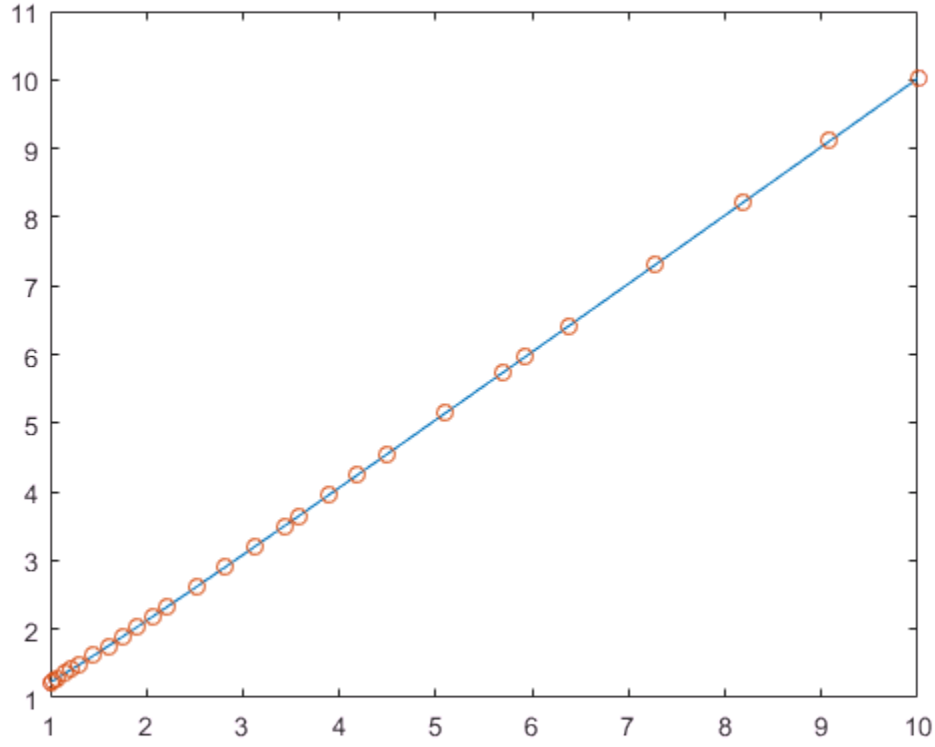

Solve Robertson Problem as Implicit Differential Algebraic Equations (DAEs)

This example reformulates a system of ODEs as a fully implicit system of differential algebraic equations (DAEs). The Robertson problem coded by hb1ode.m is a classic test problem for programs that solve stiff ODEs. The system of equations is

$$\begin{aligned} y_1' &= -0.04y_1 + 10^4 y_2 y_3 \\ y_2' &= 0.04y_1 - 10^4 4 y_2 y_3 - (3 \times 10^7) y_2^2 \\ y_3' &= (3 \times 10^7) y_2^2. \end{aligned}$$

`hb1ode` solves this system of ODEs to steady state with the initial conditions $y_1 = 1$, $y_2 = 0$, and $y_3 = 0$. But the equations also satisfy a linear conservation law,

$$y_1' + y_2' + y_3' = 0.$$

In terms of the solution and initial conditions, the conservation law is

$$y_1 + y_2 + y_3 = 1.$$

The problem can be rewritten as a system of DAEs by using the conservation law to determine the state of y_3. This reformulates the problem as the implicit DAE system

$$\begin{aligned} 0 &= y_1' + 0.04y_1 - 10^4 y_2 y_3 \\ 0 &= y_2' - 0.04y_1 + 10^4 y_2 y_3 + (3 \times 10^7) y_2^2 \\ 0 &= y_1 + y_2 + y_3 - 1. \end{aligned}$$

The function `robertsidae` encodes this DAE system.

```
function res = robertsidae(t,y,yp)
res = [yp(1) + 0.04*y(1) - 1e4*y(2)*y(3);
   yp(2) - 0.04*y(1) + 1e4*y(2)*y(3) + 3e7*y(2)^2;
   y(1) + y(2) + y(3) - 1];
```

The full example code for this formulation of the Robertson problem is available in ihb1dae.m.

Set the error tolerances and the value of $\partial f / \partial y'$.

```
options = odeset('RelTol',1e-4,'AbsTol',[1e-6 1e-10 1e-6], ...
   'Jacobian',{[],[1 0 0; 0 1 0; 0 0 0]});
```

Use `decic` to compute consistent initial conditions from guesses. Fix the first two components of `y0` to get the same consistent initial conditions as found by `ode15s` in hb1dae.m, which formulates this problem as a semi-explicit DAE system.

```
y0 = [1; 0; 1e-3];
yp0 = [0; 0; 0];
[y0,yp0] = decic(@robertsidae,0,y0,[1 1 0],yp0,[],options);
```

Solve the system of DAEs using `ode15i`.

```
tspan = [0 4*logspace(-6,6)];
[t,y] = ode15i(@robertsidae,tspan,y0,yp0,options);
```

Plot the solution components. Since the second solution component is small relative to the others, multiply it by `1e4` before plotting.

```
y(:,2) = 1e4*y(:,2);
semilogx(t,y)
ylabel('1e4 * y(:,2)')
title('Robertson DAE problem with a Conservation Law, solved by ODE15I')
```

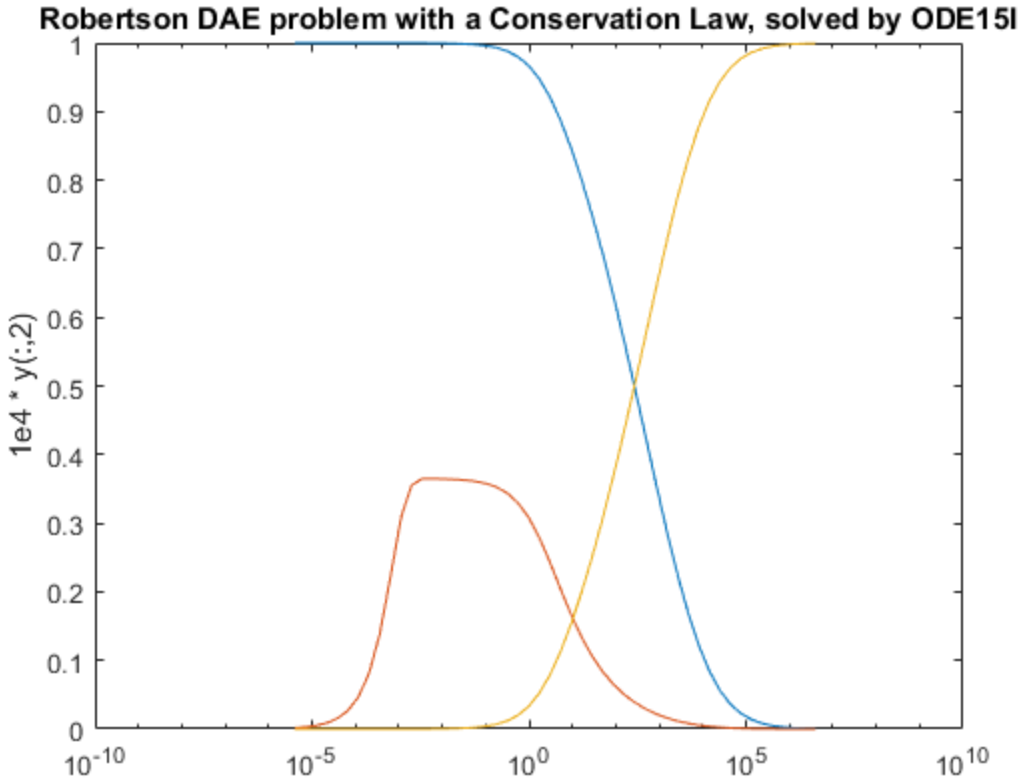

Input Arguments

`odefun` — Functions to solve

function handle

Functions to solve, specified as a function handle that defines the functions to be integrated.

The function `f = odefun(t,y,yp)`, for a scalar `t` and column vectors `y` and `yp`, must return a column vector `f` of data type `single` or `double` that corresponds to $f(t, y, y')$. `odefun` must accept the three inputs for `t`, `y`, and `yp` even if one of the inputs is not used in the function.

For example, to solve $y' - y = 0$, use this function.

```
function f = odefun(t,y,yp)
f = yp - y;
```

For a system of equations, the output of `odefun` is a vector. Each equation becomes an element in the solution vector. For example, to solve

$$y'_1 - y_2 = 0$$
$$y'_2 + 1 = 0,$$

use this function.

```
function dy = odefun(t,y,yp)
dy = zeros(2,1);
dy(1) = yp(1)-y(2);
dy(2) = yp(2)+1;
```

For information on how to provide additional parameters to the function `odefun`, see "Parameterizing Functions".

Example: `@myFcn`

Data Types: `function_handle`

`tspan` — Interval of integration

vector

Interval of integration, specified as a vector. At minimum, `tspan` must be a two element vector `[t0 tf]` specifying the initial and final times. To obtain solutions at specific times between `t0` and `tf`, use a longer vector of the form `[t0,t1,t2,...,tf]`. The elements in `tspan` must be all increasing or all decreasing.

The solver imposes the initial conditions, `y0`, at `tspan(1)`, and then integrates from `tspan(1)` to `tspan(end)`:

- If `tspan` has two elements, `[t0 tf]`, then the solver returns the solution evaluated at each internal integration step within the interval.
- If `tspan` contains more than two elements `[t0,t1,t2,...,tf]`, then the solver returns the solution evaluated at the given points. This does *not* affect the internal steps that the solver uses to traverse from `tspan(1)` to `tspan(end)`. Thus, the solver does not necessarily step precisely to each point specified in `tspan`. However, the solutions produced at the specified points are of the same order of accuracy as the solutions computed at each internal step.

  Specifying several intermediate points has little effect on the efficiency of computation, but for large systems it can affect memory management.

The solution obtained by the solver might be different depending on whether you specify `tspan` as a two-element vector or as a vector with intermediate points. If `tspan` contains several intermediate points, then they give an indication of the scale for the problem, which can affect the size of the initial step taken by the solver.

Example: `[1 10]`

Example: `[1 3 5 7 9 10]`

Data Types: `single` | `double`

`y0` — Initial conditions for *y*

vector

Initial conditions for *y*, specified as a vector. `y0` must be the same length as the vector output of `odefun`, so that `y0` contains an initial condition for each equation defined in `odefun`.

The initial conditions for `y0` and `yp0` must be consistent, meaning that $f(t_0, y_0, y'_0) = 0$. Use the `decic` function to compute consistent initial conditions close to guessed values.

Data Types: `single` | `double`

`yp0` — Initial conditions for *y′*

vector

Initial conditions for *y'*, specified as a vector. `yp0` must be the same length as the vector output of `odefun`, so that `yp0` contains an initial condition for each variable defined in `odefun`.

The initial conditions for `y0` and `yp0` must be consistent, meaning that $f(t_0, y_0, y'_0) = 0$. Use the `decic` function to compute consistent initial conditions close to guessed values.

Data Types: `single` | `double`

`options` — Option structure
structure array

Option structure, specified as a structure array. Use the `odeset` function to create or modify the option structure.

See "Summary of ODE Options" for a list of which options are compatible with each ODE solver.

Example: `options = odeset('RelTol',1e-5,'Stats','on','OutputFcn',@odeplot)` specifies a relative error tolerance of `1e-5`, turns on the display of solver statistics, and specifies the output function `@odeplot` to plot the solution as it is computed.

Data Types: `struct`

Output Arguments

`t` — Evaluation points
column vector

Evaluation points, returned as a column vector.

- If `tspan` contains two elements, `[t0 tf]`, then `t` contains the internal evaluation points used to perform the integration.
- If `tspan` contains more than two elements, then `t` is the same as `tspan`.

`y` — Solutions
array

Solutions, returned as an array. Each row in `y` corresponds to the solution at the value returned in the corresponding row of `t`.

`te` — Time of events
column vector

Time of events, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ye` — Solution at time of events

array

Solution at time of events, returned as an array. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ie` — Index of vanishing event function

column vector

Index of vanishing event function, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`sol` — Structure for evaluation

structure array

Structure for evaluation, returned as a structure array. Use this structure with the `deval` function to evaluate the solution at any point in the interval `[t0 tf]`. The `sol` structure array always includes these fields:

Structure Field	Description
`sol.x`	Row vector of the steps chosen by the solver.
`sol.y`	Solutions. Each column `sol.y(:,i)` contains the solution at time `sol.x(i)`.
`sol.solver`	Solver name.

Additionally, if you specify the `Events` option and events are detected, then `sol` also includes these fields:

Structure Field	Description
`sol.xe`	Points when events occurred. `sol.xe(end)` contains the exact point of a terminal event, if any.
`sol.ye`	Solutions that correspond to events in `sol.xe`.

Structure Field	Description
`sol.ie`	Indices into the vector returned by the function specified in the `Events` option. The values indicate which event the solver detected.

Tips

- Providing the Jacobian matrix to `ode15i` is critical for reliability and efficiency. Alternatively, if the system is large and sparse, then providing the Jacobian sparsity pattern also assists the solver. In either case, use `odeset` to pass in the matrices using the `Jacobian` or `JPattern` options.

Algorithms

`ode15i` is a variable-step, variable-order (VSVO) solver based on the backward differentiation formulas (BDFs) of orders 1 to 5. `ode15i` is designed to be used with fully implicit differential equations and index-1 differential algebraic equations (DAEs). The helper function `decic` computes consistent initial conditions that are suitable to be used with `ode15i` [1].

References

[1] Lawrence F. Shampine, "Solving 0 = F(t, y(t), y′(t)) in MATLAB," *Journal of Numerical Mathematics*, Vol.10, No.4, 2002, pp. 291-310.

See Also

See Also

`decic` | `deval` | `ode15s` | `ode23t` | `odeget` | `odeset`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"

"Solve Differential Algebraic Equations (DAEs)"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

ode15s

Solve stiff differential equations and DAEs — variable order method

Syntax

```
[t,y] = ode15s(odefun,tspan,y0)
[t,y] = ode15s(odefun,tspan,y0,options)
[t,y,te,ye,ie] = ode15s(odefun,tspan,y0,options)
sol = ode15s( ___ )
```

Description

`[t,y] = ode15s(odefun,tspan,y0)`, where `tspan = [t0 tf]`, integrates the system of differential equations $y' = f(t, y)$ from `t0` to `tf` with initial conditions `y0`. Each row in the solution array `y` corresponds to a value returned in column vector `t`.

All MATLAB ODE solvers can solve systems of equations of the form $y' = f(t, y)$, or problems that involve a mass matrix, $M(t, y)y' = f(t, y)$. The solvers all use similar syntaxes. The `ode23s` solver only can solve problems with a mass matrix if the mass matrix is constant. `ode15s` and `ode23t` can solve problems with a mass matrix that is singular, known as differential-algebraic equations (DAEs). Specify the mass matrix using the `Mass` option of `odeset`.

`[t,y] = ode15s(odefun,tspan,y0,options)` also uses the integration settings defined by `options`, which is an argument created using the `odeset` function. For example, use the `AbsTol` and `RelTol` options to specify absolute and relative error tolerances, or the `Mass` option to provide a mass matrix.

`[t,y,te,ye,ie] = ode15s(odefun,tspan,y0,options)` additionally finds where functions of (*t*,*y*), called event functions, are zero. In the output, `te` is the time of the event, `ye` is the solution at the time of the event, and `ie` is the index of the triggered event.

For each event function, specify whether the integration is to terminate at a zero and whether the direction of the zero crossing matters. Do this by setting the `'Events'`

property to a function, such as `myEventFcn` or `@myEventFcn`, and creating a corresponding function: `[value,isterminal,direction] = myEventFcn(t,y)`. For more information, see "ODE Event Location".

`sol = ode15s( ___ )` returns a structure that you can use with `deval` to evaluate the solution at any point on the interval `[t0 tf]`. You can use any of the input argument combinations in previous syntaxes.

Examples

ODE With Single Solution Component

Simple ODEs that have a single solution component can be specified as an anonymous function in the call to the solver. The anonymous function must accept two inputs `(t,y)` even if one of the inputs is not used.

Solve the ODE

$$y' = -10t.$$

Use a time interval of `[0,2]` and the initial condition `y0 = 1`.

```
tspan = [0 2];
y0 = 1;
[t,y] = ode15s(@(t,y) -10*t, tspan, y0);
```

Plot the solution.

```
plot(t,y,'-o')
```

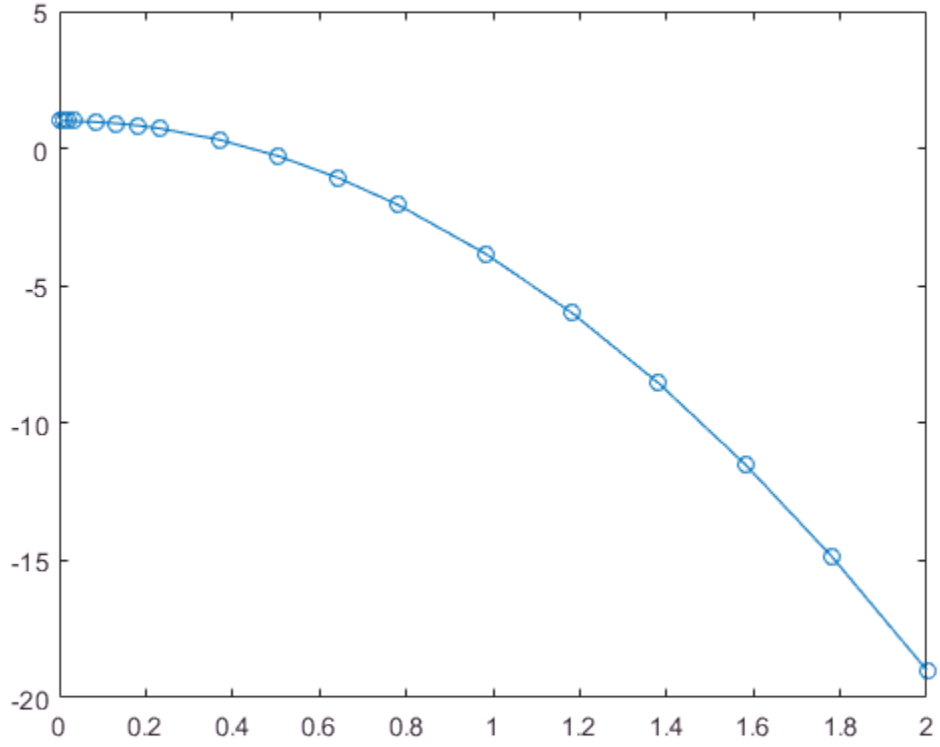

Solve Stiff ODE

An example of a stiff system of equations is the van der Pol equations in relaxation oscillation. The limit cycle has regions where the solution components change slowly and the problem is quite stiff, alternating with regions of very sharp change where it is not stiff.

The system of equations is:

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= 1000(1 - y_1^2)y_2 - y_1 \end{aligned}$$

The initial conditions are $y_1(0) = 2$ and $y_2(0) = 0$. The function `vdp1000` ships with MATLAB® and encodes the equations.

```
function dydt = vdp1000(t,y)
%VDP1000  Evaluate the van der Pol ODEs for mu = 1000.
%
%   See also ODE15S, ODE23S, ODE23T, ODE23TB.

%   Jacek Kierzenka and Lawrence F. Shampine
%   Copyright 1984-2014 The MathWorks, Inc.

dydt = [y(2); 1000*(1-y(1)^2)*y(2)-y(1)];
```

Solving this system using `ode45` with the default relative and absolute error tolerances (`1e-3` and `1e-6`, respectively) is extremely slow, requiring several minutes to solve and plot the solution. `ode45` requires millions of time steps to complete the integration, due to the areas of stiffness where it struggles to meet the tolerances.

This is a plot of the solution obtained by `ode45`, which takes a long time to compute. Notice the enormous number of time steps required to pass through areas of stiffness.

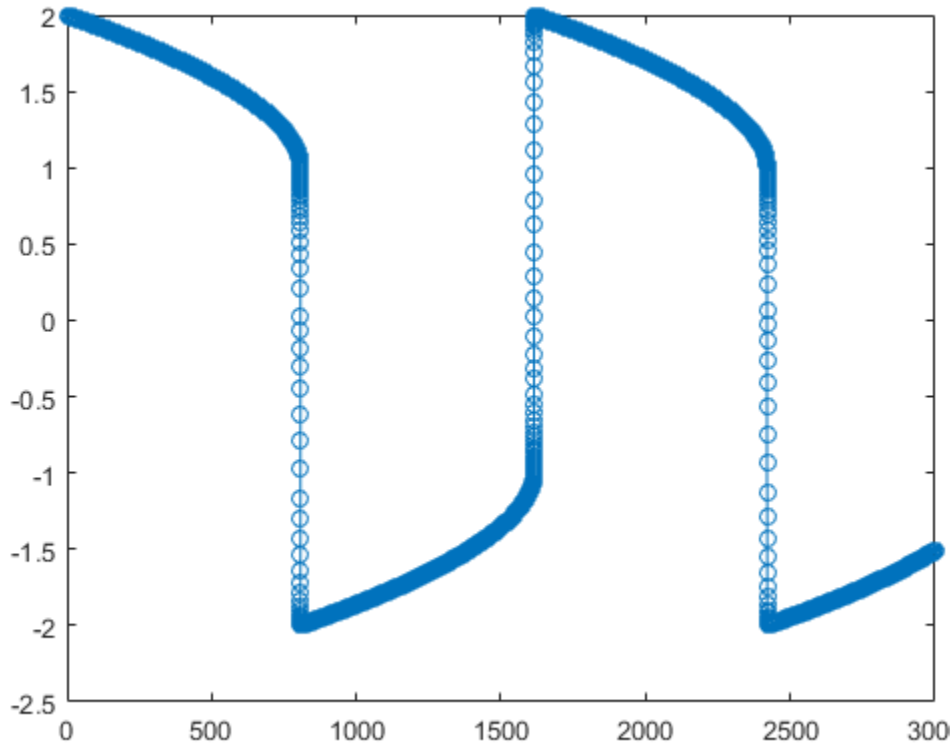

Solve the stiff system using the `ode15s` solver, and then plot the first column of the solution `y` against the time points `t`. The `ode15s` solver passes through stiff areas with far fewer steps than `ode45`.

```
[t,y] = ode15s(@vdp1000,[0 3000],[2 0]);
plot(t,y(:,1),'-o')
```

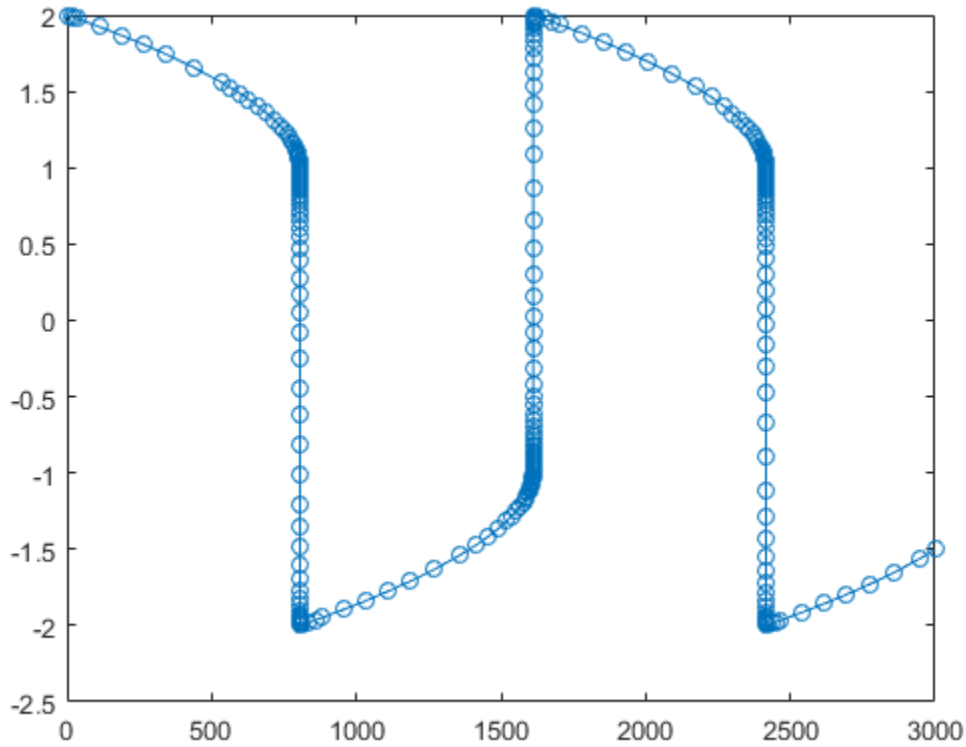

Pass Extra Parameters to ODE Function

`ode15s` only works with functions that use two input arguments, `t` and `y`. However, you can pass in extra parameters by defining them outside the function and passing them in when you specify the function handle.

Solve the ODE

$$y'' = \frac{A}{B} t y.$$

Rewriting the equation as a first-order system yields

$$
\begin{aligned}
y_1' &= y_2 \\
y_2' &= \frac{A}{B} t y_1.
\end{aligned}
$$

odefcn.m represents this system of equations as a function that accepts four input arguments: t, y, A, and B.

```
function dydt = odefcn(t,y,A,B)
dydt = zeros(2,1);
dydt(1) = y(2);
dydt(2) = (A/B)*t.*y(1);
```

Solve the ODE using ode15s. Specify the function handle such that it passes in the predefined values for A and B to odefcn.

```
A = 1;
B = 2;
tspan = [0 5];
y0 = [0 0.01];
[t,y] = ode15s(@(t,y) odefcn(t,y,A,B), tspan, y0);
```

Plot the results.

```
plot(t,y(:,1),'-o',t,y(:,2),'-.')
```

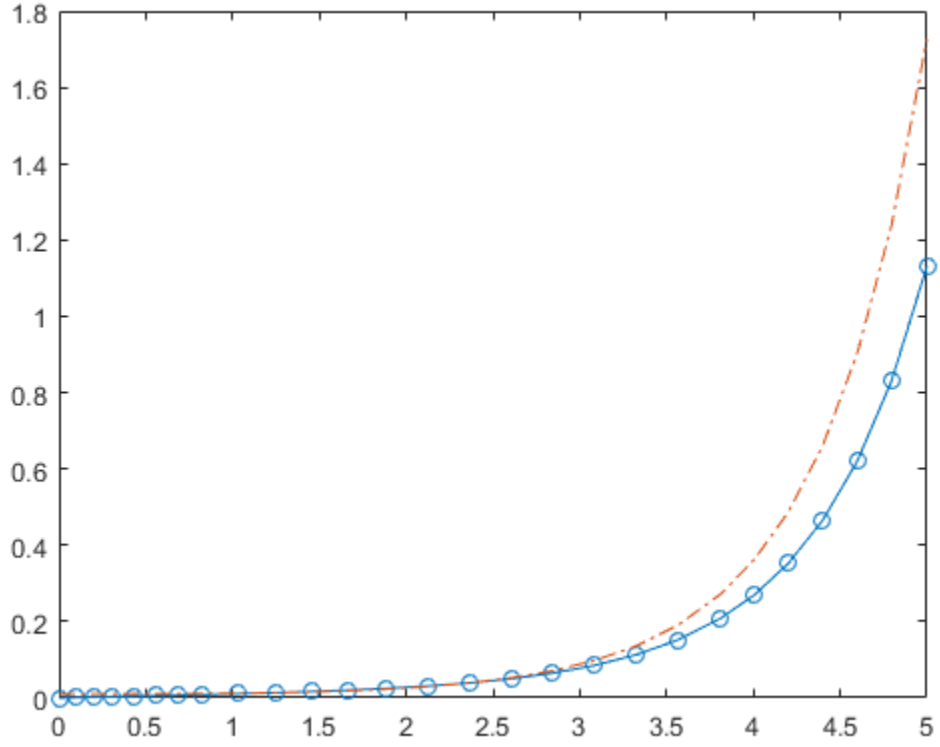

Compare Stiff ODE Solvers

The `ode15s` solver is a good first choice for most stiff problems. However, the other stiff solvers might be more efficient for certain types of problems. This example solves a stiff test equation using all four stiff ODE solvers.

Consider the test equation

$$y' = -\lambda y.$$

The equation becomes increasingly stiff as the magnitude of λ increases. Use $\lambda = 1 \times 10^9$ and the initial condition $y(0) = 1$ over the time interval `[0 0.5]`. With

these values, the problem is stiff enough that `ode45` and `ode23` struggle to integrate the equation. Also, use `odeset` to pass in the constant Jacobian $J = \frac{\partial f}{\partial y} = -\lambda$ and turn on the display of solver statistics.

```
lambda = 1e9;
opts = odeset('Stats','on','Jacobian',-lambda);
tspan = [0 0.5];
y0 = 1;
subplot(2,2,1)
disp('ode15s stats:')
```

```
ode15s stats:
```

```
tic, ode15s(@(t,y) -lambda*y, tspan, y0, opts), toc
```

```
104 successful steps
1 failed attempts
212 function evaluations
0 partial derivatives
21 LU decompositions
210 solutions of linear systems
Elapsed time is 0.760013 seconds.
```

```
title('ode15s')

subplot(2,2,2)
disp(' ')



disp('ode23s stats:')
```

```
ode23s stats:
```

```
tic, ode23s(@(t,y) -lambda*y, tspan, y0, opts), toc
```

```
63 successful steps
0 failed attempts
191 function evaluations
0 partial derivatives
63 LU decompositions
189 solutions of linear systems
Elapsed time is 0.244000 seconds.
```

```
title('ode23s')

subplot(2,2,3)
disp(' ')



disp('ode23t stats:')

ode23t stats:

tic, ode23t(@(t,y) -lambda*y, tspan, y0, opts), toc

95 successful steps
0 failed attempts
125 function evaluations
0 partial derivatives
28 LU decompositions
123 solutions of linear systems
Elapsed time is 0.356294 seconds.

title('ode23t')

subplot(2,2,4)
disp(' ')



disp('ode23tb stats:')

ode23tb stats:

tic, ode23tb(@(t,y) -lambda*y, tspan, y0, opts), toc

71 successful steps
0 failed attempts
167 function evaluations
0 partial derivatives
23 LU decompositions
236 solutions of linear systems
Elapsed time is 0.307926 seconds.

title('ode23tb')
```

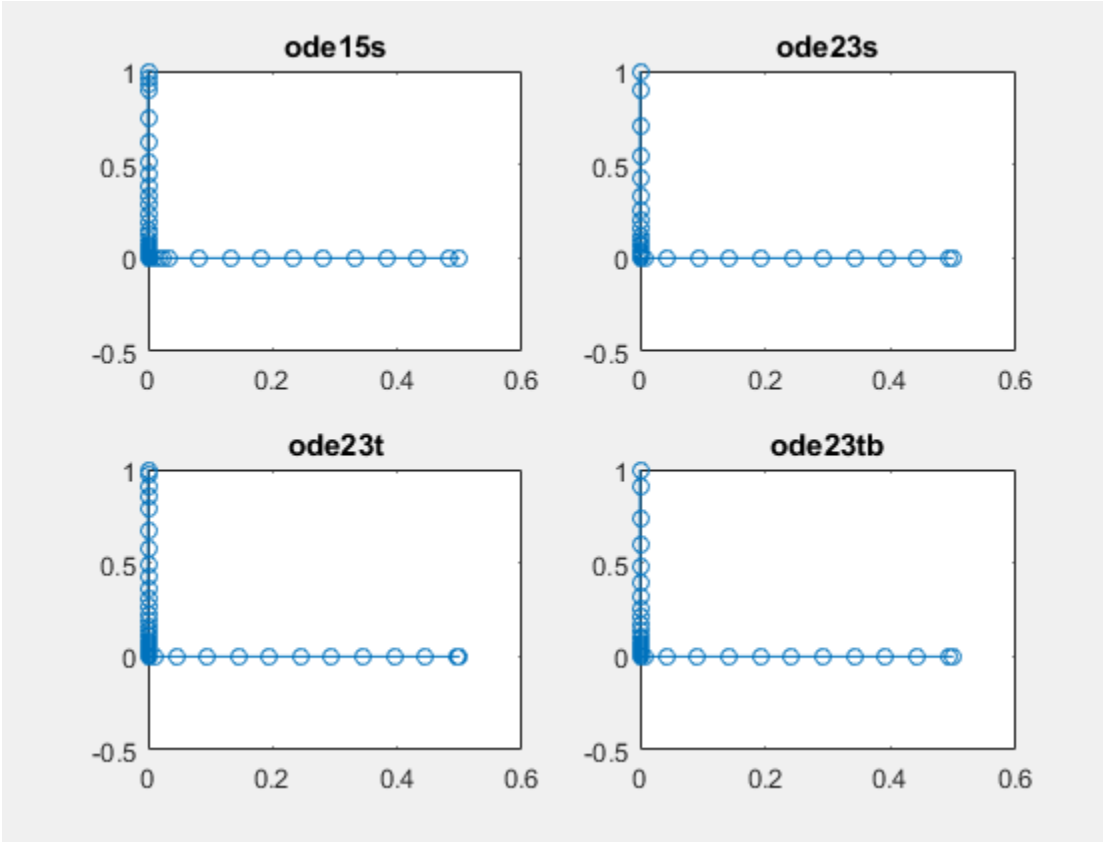

The stiff solvers all perform well, but `ode23s` completes the integration with the fewest steps and runs the fastest for this particular problem. Since the constant Jacobian is specified, none of the solvers need to calculate partial derivatives to compute the solution. Specifying the Jacobian benefits `ode23s` the most since it normally evaluates the Jacobian in every step.

For general stiff problems, the performance of the stiff solvers varies depending on the format of the problem and specified options. Providing the Jacobian matrix or sparsity pattern always improves solver efficiency for stiff problems. But since the stiff solvers use the Jacobian differently, the improvement can vary significantly. Practically speaking, if a system of equations is very large or needs to be solved many times, then it is worthwhile to investigate the performance of the different solvers to minimize execution time.

Evaluate and Extend Solution Structure

The van der Pol equation is a second order ODE

$$y_1'' - \mu\left(1 - y_1^2\right)y_1' + y_1 = 0.$$

Solve the van der Pol equation with $\mu = 1000$ using `ode15s`. The function `vdp1000.m` ships with MATLAB® and encodes the equations. Specify a single output to return a structure containing information about the solution, such as the solver and evaluation points.

```
tspan = [0 3000];
y0 = [2 0];
sol = ode15s(@vdp1000,tspan,y0)
```

```
sol = struct with fields:
     solver: 'ode15s'
    extdata: [1×1 struct]
          x: [1×592 double]
          y: [2×592 double]
      stats: [1×1 struct]
      idata: [1×1 struct]
```

Use `linspace` to generate 2500 points in the interval `[0 3000]`. Evaluate the first component of the solution at these points using `deval`.

```
x = linspace(0,3000,2500);
y = deval(sol,x,1);
```

Plot the solution.

```
plot(x,y)
```

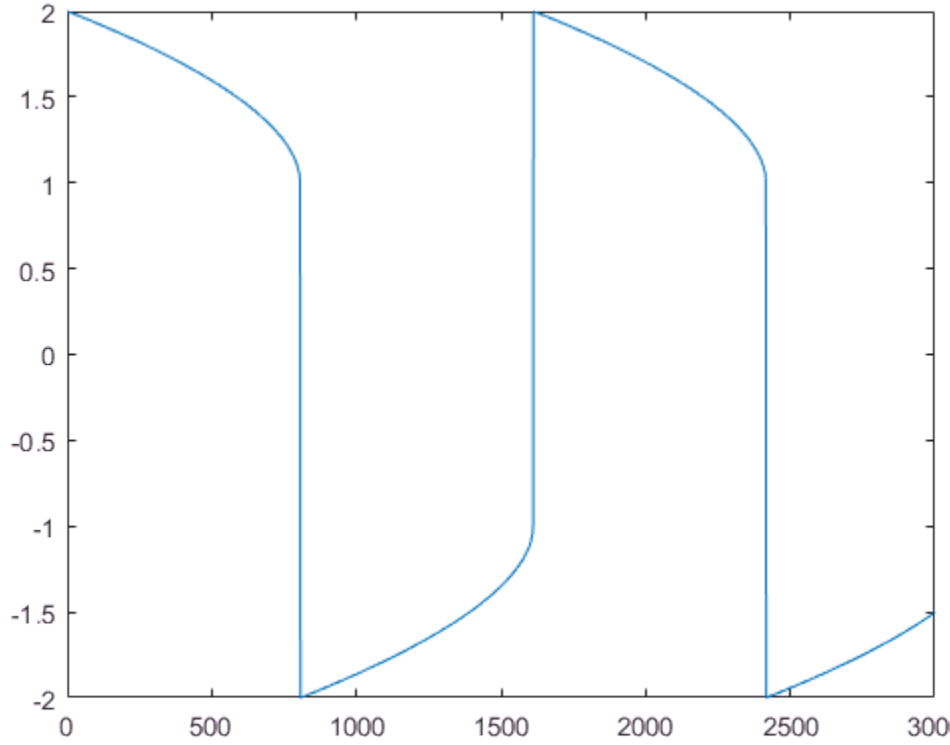

Extend the solution to t_f = 4000 using `odextend` and add the result to the original plot.

```
tf = 4000;
sol_new = odextend(sol,@vdp1000,tf);
x = linspace(3000,tf,350);
y = deval(sol_new,x,1);
hold on
plot(x,y,'r')
```

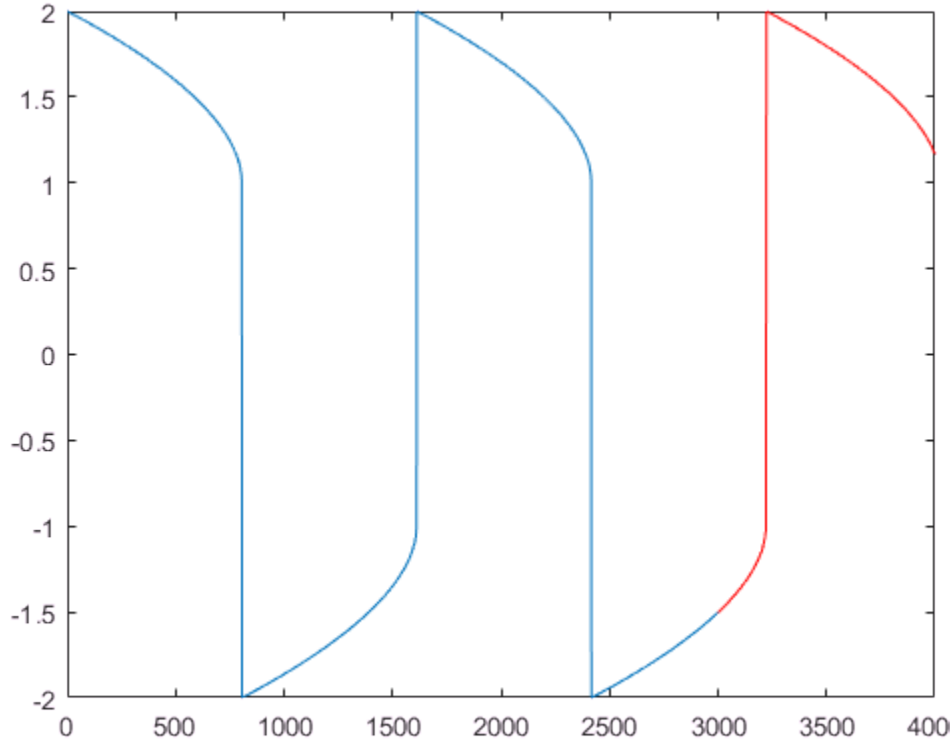

Solve Robertson Problem as Semi-Explicit Differential Algebraic Equations (DAEs)

This example reformulates a system of ODEs as a system of differential algebraic equations (DAEs). The Robertson problem found in hb1ode.m is a classic test problem for programs that solve stiff ODEs. The system of equations is

$$\begin{aligned} y_1' &= -0.04y_1 + 10^4 y_2 y_3 \\ y_2' &= 0.04y_1 - 10^4 y_2 y_3 - (3 \times 10^7) y_2^2 \\ y_3' &= (3 \times 10^7) y_2^2. \end{aligned}$$

`hb1ode` solves this system of ODEs to steady state with the initial conditions $y_1 = 1$, $y_2 = 0$, and $y_3 = 0$. But the equations also satisfy a linear conservation law,

$$y_1' + y_2' + y_3' = 0.$$

In terms of the solution and initial conditions, the conservation law is

$$y_1 + y_2 + y_3 = 1.$$

The system of equations can be rewritten as a system of DAEs by using the conservation law to determine the state of y_3. This reformulates the problem as the DAE system

$$\begin{aligned} y_1' &= -0.04y_1 + 10^4 y_2 y_3 \\ y_2' &= 0.04y_1 - 10^4 y_2 y_3 - (3 \times 10^7) y_2^2 \\ 0 &= y_1 + y_2 + y_3 - 1. \end{aligned}$$

The differential index of this system is 1, since only a single derivative of y_3 is required to make this a system of ODEs. Therefore, no further transformations are required before solving the system.

The function `robertsdae` encodes this DAE system. Save `robertsdae.m` in your current folder to run the example.

```
function out = robertsdae(t,y)
out = [-0.04*y(1) + 1e4*y(2).*y(3)
   0.04*y(1) - 1e4*y(2).*y(3) - 3e7*y(2).^2
   y(1) + y(2) + y(3) - 1 ];
```

The full example code for this formulation of the Robertson problem is available in hb1dae.m.

Solve the DAE system using `ode15s`. Consistent initial conditions for `y0` are obvious based on the conservation law. Use `odeset` to set the options:

- Use a constant mass matrix to represent the left hand side of the system of equations.

$$\begin{pmatrix} y_1' \\ y_2' \\ 0 \end{pmatrix} = My' \rightarrow M = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 0 \end{pmatrix}$$

- Set the relative error tolerance to `1e-4`.

- Use an absolute tolerance of `1e-10` for the second solution component, since the scale varies dramatically from the other components.
- Leave the `'MassSingular'` option at its default value `'maybe'` to test the automatic detection of a DAE.

```
y0 = [1; 0; 0];
tspan = [0 4*logspace(-6,6)];
M = [1 0 0; 0 1 0; 0 0 0];
options = odeset('Mass',M,'RelTol',1e-4,'AbsTol',[1e-6 1e-10 1e-6]);
[t,y] = ode15s(@robertsdae,tspan,y0,options);
```

Plot the solution.

```
y(:,2) = 1e4*y(:,2);
semilogx(t,y);
ylabel('1e4 * y(:,2)');
title('Robertson DAE problem with a Conservation Law, solved by ODE15S');
```

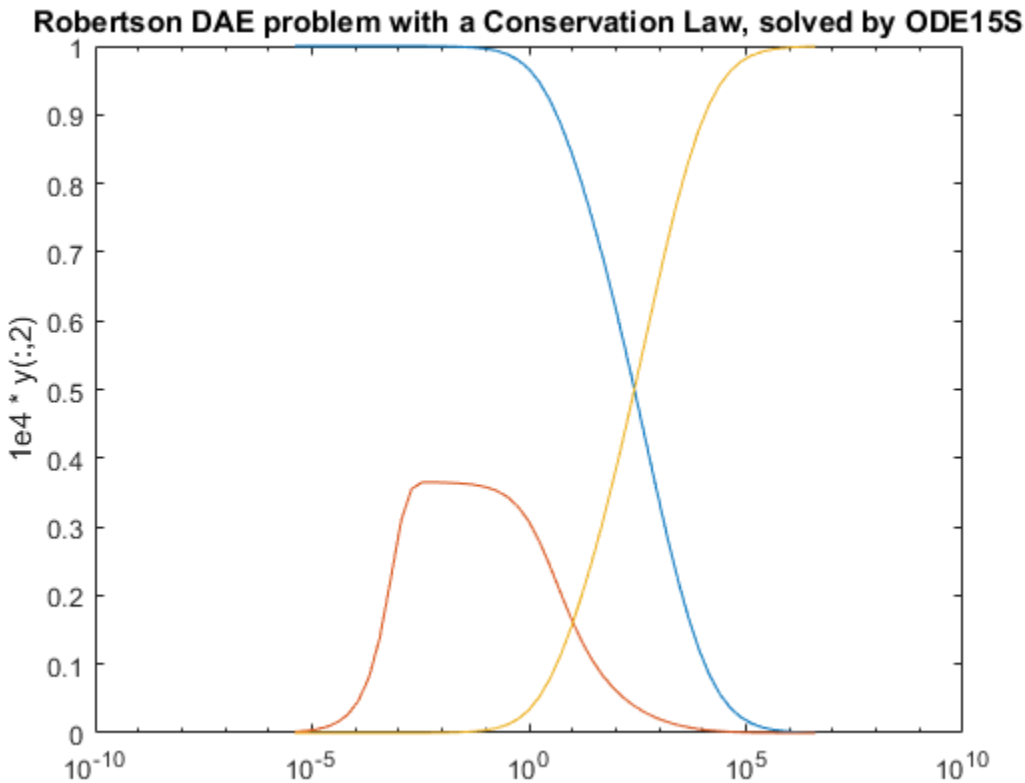

Input Arguments

`odefun` — Functions to solve
function handle

Functions to solve, specified as a function handle which defines the functions to be integrated.

The function `dydt = odefun(t,y)`, for a scalar `t` and a column vector `y`, must return a column vector `dydt` of data type `single` or `double` that corresponds to $f(t,y)$. `odefun`

must accept both input arguments, `t` and `y`, even if one of the arguments is not used in the function.

For example, to solve $y' = 5y - 3$, use the function:

```
function dydt = odefun(t,y)
dydt = 5*y-3;
```

For a system of equations, the output of `odefun` is a vector. Each element in the vector is the solution to one equation. For example, to solve

$$y'_1 = y_1 + 2y_2$$
$$y'_2 = 3y_1 + 2y_2$$

use the function:

```
function dydt = odefun(t,y)
dydt = zeros(2,1);
dydt(1) = y(1)+2*y(2);
dydt(2) = 3*y(1)+2*y(2);
```

For information on how to provide additional parameters to the function `odefun`, see "Parameterizing Functions".

Example: `@myFcn`

Data Types: `function_handle`

`tspan` — Interval of integration

vector

Interval of integration, specified as a vector. At minimum, `tspan` must be a two element vector `[t0 tf]` specifying the initial and final times. To obtain solutions at specific times between `t0` and `tf`, use a longer vector of the form `[t0,t1,t2,...,tf]`. The elements in `tspan` must be all increasing or all decreasing.

The solver imposes the initial conditions, `y0`, at `tspan(1)`, then integrates from `tspan(1)` to `tspan(end)`:

- If `tspan` has two elements, `[t0 tf]`, then the solver returns the solution evaluated at each internal integration step within the interval.

- If `tspan` contains more than two elements `[t0,t1,t2,...,tf]`, then the solver returns the solution evaluated at the given points. This does *not* affect the internal steps that the solver uses to traverse from `tspan(1)` to `tspan(end)`. Thus, the solver does not necessarily step precisely to each point specified in `tspan`. However, the solutions produced at the specified points are of the same order of accuracy as the solutions computed at each internal step.

  Specifying several intermediate points has little effect on the efficiency of computation, but for large systems it can affect memory management.

The solution obtained by the solver might be different depending on whether you specify `tspan` as a two-element vector or as a vector with intermediate points. If `tspan` contains several intermediate points, then they give an indication of the scale for the problem, which can affect the size of the initial step taken by the solver.

Example: `[1 10]`

Example: `[1 3 5 7 9 10]`

Data Types: `single` | `double`

`y0` — Initial conditions
vector

Initial conditions, specified as a vector. `y0` must be the same length as the vector output of `odefun`, so that `y0` contains an initial condition for each equation defined in `odefun`.

Data Types: `single` | `double`

`options` — Option structure
structure array

Option structure, specified as a structure array. Use the `odeset` function to create or modify the options structure. See "Summary of ODE Options" for a list of the options compatible with each solver.

Example: `options = odeset('RelTol',1e-5,'Stats','on','OutputFcn',@odeplot)` specifies a relative error tolerance of `1e-5`, turns on the display of solver statistics, and specifies the output function `@odeplot` to plot the solution as it is computed.

Data Types: `struct`

Output Arguments

`t` — Evaluation points
column vector

Evaluation points, returned as a column vector.

- If `tspan` contains two elements, `[t0 tf]`, then `t` contains the internal evaluation points used to perform the integration.
- If `tspan` contains more than two elements, then `t` is the same as `tspan`.

`y` — Solutions
array

Solutions, returned as an array. Each row in `y` corresponds to the solution at the value returned in the corresponding row of `t`.

`te` — Time of events
column vector

Time of events, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ye` — Solution at time of events
array

Solution at time of events, returned as an array. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ie` — Index of vanishing event function
column vector

Index of vanishing event function, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`sol` — Structure for evaluation
structure array

Structure for evaluation, returned as a structure array. Use this structure with the `deval` function to evaluate the solution at any point in the interval `[t0 tf]`. The `sol` structure array always includes these fields:

Structure Field	Description
`sol.x`	Row vector of the steps chosen by the solver.
`sol.y`	Solutions. Each column `sol.y(:,i)` contains the solution at time `sol.x(i)`.
`sol.solver`	Solver name.

Additionally, if you specify the `Events` option and events are detected, then `sol` also includes these fields:

Structure Field	Description
`sol.xe`	Points when events occurred. `sol.xe(end)` contains the exact point of a terminal event, if any.
`sol.ye`	Solutions that correspond to events in `sol.xe`.
`sol.ie`	Indices into the vector returned by the function specified in the `Events` option. The values indicate which event the solver detected.

Algorithms

`ode15s` is a variable-step, variable-order (VSVO) solver based on the numerical differentiation formulas (NDFs) of orders 1 to 5. Optionally, it can use the backward differentiation formulas (BDFs, also known as Gear's method) that are usually less efficient. Like `ode113`, `ode15s` is a multistep solver. Use `ode15s` if `ode45` fails or is very inefficient and you suspect that the problem is stiff, or when solving a differential-algebraic equation (DAE) [1], [2].

References

[1] Shampine, L. F. and M. W. Reichelt, “The MATLAB ODE Suite,” *SIAM Journal on Scientific Computing*, Vol. 18, 1997, pp. 1–22.

[2] Shampine, L. F., M. W. Reichelt, and J.A. Kierzenka, “Solving Index-1 DAEs in MATLAB and Simulink,” *SIAM Review*, Vol. 41, 1999, pp. 538–552.

See Also

See Also

`deval` | `ode23s` | `ode23t` | `ode23tb` | `ode45` | `odeget` | `odeset`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"
"Solve Stiff ODEs"
"Solve Differential Algebraic Equations (DAEs)"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

ode23

Solve nonstiff differential equations — low order method

Syntax

```
[t,y] = ode23(odefun,tspan,y0)
[t,y] = ode23(odefun,tspan,y0,options)
[t,y,te,ye,ie] = ode23(odefun,tspan,y0,options)
sol = ode23( ___ )
```

Description

`[t,y] = ode23(odefun,tspan,y0)`, where `tspan = [t0 tf]`, integrates the system of differential equations $y' = f(t, y)$ from `t0` to `tf` with initial conditions `y0`. Each row in the solution array `y` corresponds to a value returned in column vector `t`.

All MATLAB ODE solvers can solve systems of equations of the form $y' = f(t, y)$, or problems that involve a mass matrix, $M(t, y)y' = f(t, y)$. The solvers all use similar syntaxes. The `ode23s` solver only can solve problems with a mass matrix if the mass matrix is constant. `ode15s` and `ode23t` can solve problems with a mass matrix that is singular, known as differential-algebraic equations (DAEs). Specify the mass matrix using the `Mass` option of `odeset`.

`[t,y] = ode23(odefun,tspan,y0,options)` also uses the integration settings defined by `options`, which is an argument created using the `odeset` function. For example, use the `AbsTol` and `RelTol` options to specify absolute and relative error tolerances, or the `Mass` option to provide a mass matrix.

`[t,y,te,ye,ie] = ode23(odefun,tspan,y0,options)` additionally finds where functions of (*t*,*y*), called event functions, are zero. In the output, `te` is the time of the event, `ye` is the solution at the time of the event, and `ie` is the index of the triggered event.

For each event function, specify whether the integration is to terminate at a zero and whether the direction of the zero crossing matters. Do this by setting the `'Events'`

property to a function, such as `myEventFcn` or `@myEventFcn`, and creating a corresponding function: [`value`,`isterminal`,`direction`] = `myEventFcn`(`t`,`y`). For more information, see "ODE Event Location".

`sol = ode23( ___ )` returns a structure that you can use with `deval` to evaluate the solution at any point on the interval `[t0 tf]`. You can use any of the input argument combinations in previous syntaxes.

Examples

ODE with Single Solution Component

Simple ODEs that have a single solution component can be specified as an anonymous function in the call to the solver. The anonymous function must accept two inputs `(t,y)` even if one of the inputs is not used.

Solve the ODE

$$y' = 2t.$$

Use a time interval of `[0,5]` and the initial condition `y0 = 0`.

```
tspan = [0 5];
y0 = 0;
[t,y] = ode23(@(t,y) 2*t, tspan, y0);
```

Plot the solution.

```
plot(t,y,'-o')
```

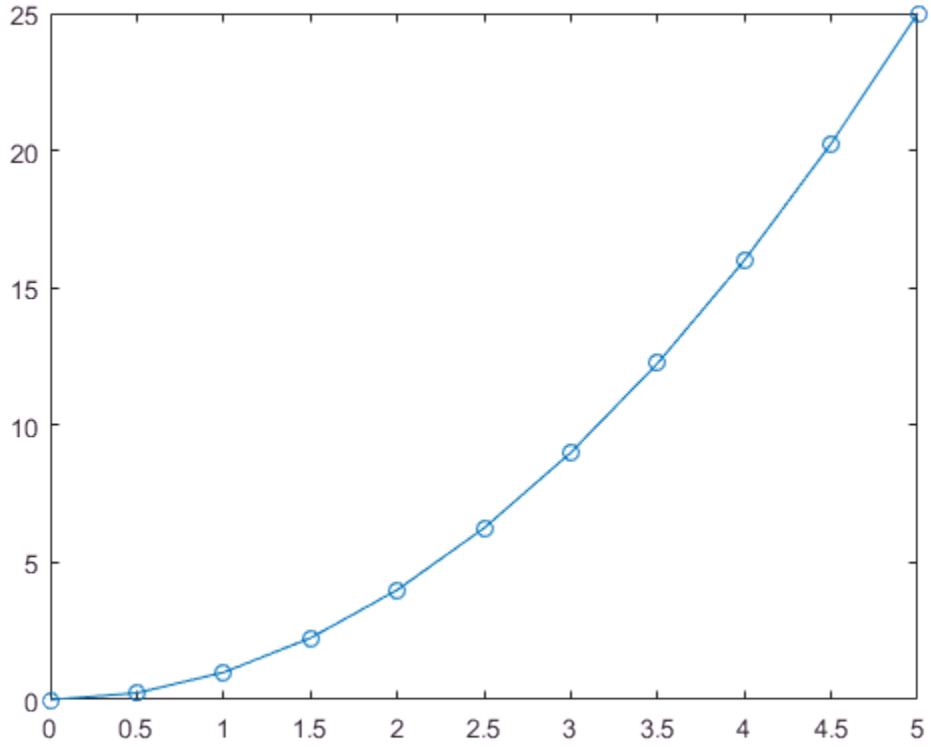

Solve Nonstiff Equation

The van der Pol equation is a second order ODE

$$y_1'' - \mu\left(1 - y_1^2\right) y_1' + y_1 = 0,$$

where $\mu > 0$ is a scalar parameter. Rewrite this equation as a system of first-order ODEs by making the substitution $y_1' = y_2$. The resulting system of first-order ODEs is

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= \mu(1 - y_1^2)y_2 - y_1. \end{aligned}$$

The function file `vdp1.m` represents the van der Pol equation using $\mu = 1$. The variables y_1 and y_2 are the entries `y(1)` and `y(2)` of a two-element vector, `dydt`.

```
function dydt = vdp1(t,y)
%VDP1  Evaluate the van der Pol ODEs for mu = 1
%
%   See also ODE113, ODE23, ODE45.

%   Jacek Kierzenka and Lawrence F. Shampine
%   Copyright 1984-2014 The MathWorks, Inc.

dydt = [y(2); (1-y(1)^2)*y(2)-y(1)];
```

Solve the ODE using the `ode23` function on the time interval `[0 20]` with initial values `[2 0]`. The resulting output is a column vector of time points `t` and a solution array `y`. Each row in `y` corresponds to a time returned in the corresponding row of `t`. The first column of `y` corresponds to y_1, and the second column to y_2.

```
[t,y] = ode23(@vdp1,[0 20],[2; 0]);
```

Plot the solutions for y_1 and y_2 against `t`.

```
plot(t,y(:,1),'-o',t,y(:,2),'-o')
title('Solution of van der Pol Equation (\mu = 1) with ODE23');
xlabel('Time t');
ylabel('Solution y');
legend('y_1','y_2')
```

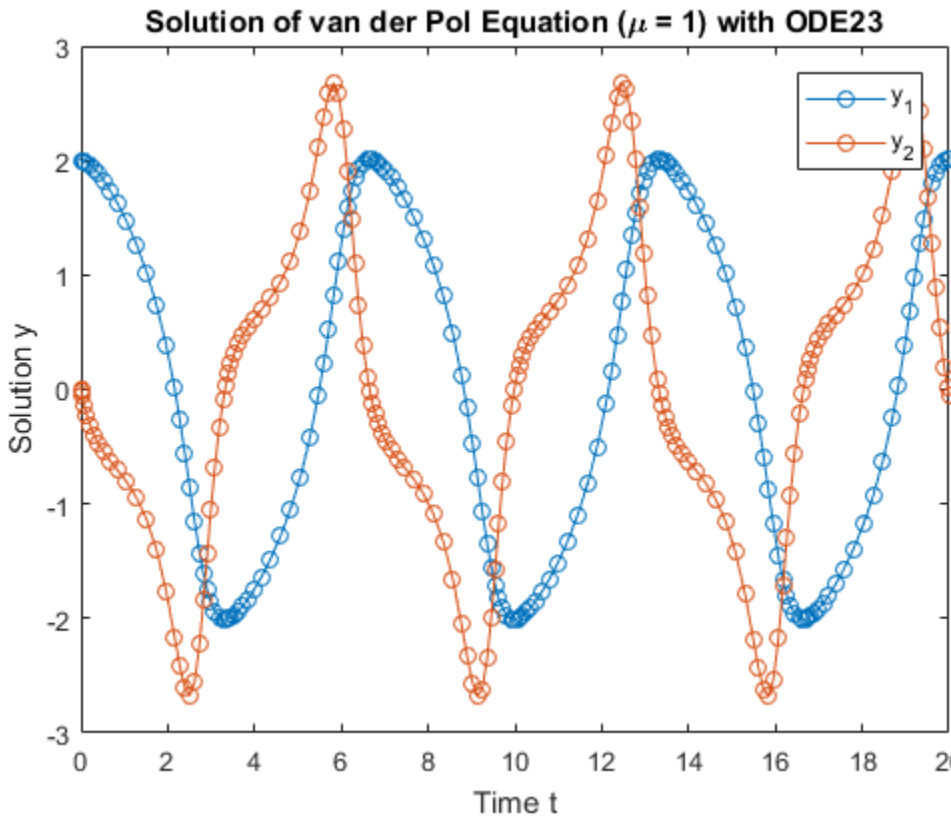

Pass Extra Parameters to ODE Function

`ode23` only works with functions that use two input arguments, `t` and `y`. However, you can pass in extra parameters by defining them outside the function and passing them in when you specify the function handle.

Solve the ODE

$$y'' = \frac{A}{B} t y.$$

Rewriting the equation as a first-order system yields

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= \frac{A}{B} t y_1. \end{aligned}$$

odefcn.m represents this system of equations as a function that accepts four input arguments: t, y, A, and B.

```
function dydt = odefcn(t,y,A,B)
dydt = zeros(2,1);
dydt(1) = y(2);
dydt(2) = (A/B)*t.*y(1);
```

Solve the ODE using ode23. Specify the function handle such that it passes in the predefined values for A and B to odefcn.

```
A = 1;
B = 2;
tspan = [0 5];
y0 = [0 0.01];
[t,y] = ode23(@(t,y) odefcn(t,y,A,B), tspan, y0);
```

Plot the results.

```
plot(t,y(:,1),'-o',t,y(:,2),'-.')
```

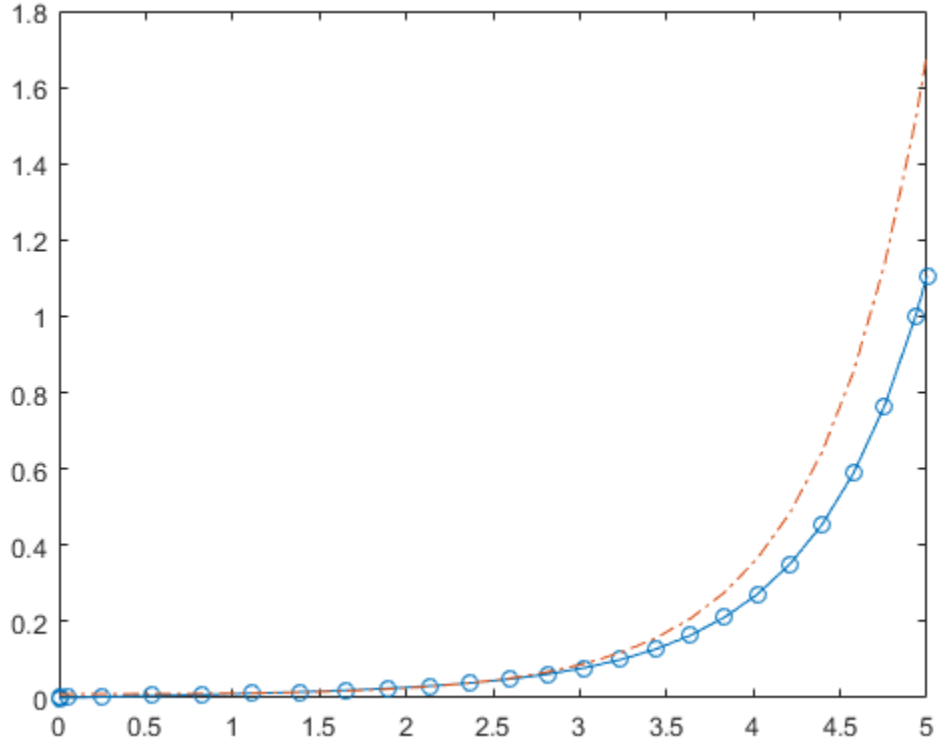

ODE With Crude Error Threshold

Compared to `ode45`, the `ode23` solver is better at solving problems with crude error tolerances.

Compare the performance of `ode45` and `ode23` by solving the moderately-stiff ODE

$$y' = -\lambda y$$

for $\lambda = 1000$. This ODE is a test equation that becomes increasingly stiff as λ increases. Use `odeset` to turn on the display of solver statistics.

```
opts = odeset('Stats','on');
```

```
tspan = [0 2];
y0 = 1;
lambda = 1e3;
subplot(1,2,1)
disp('ode45 stats:')
```

```
ode45 stats:
```

```
tic, ode45(@(t,y) -lambda*y, tspan, y0, opts), toc
```

```
615 successful steps
35 failed attempts
3901 function evaluations
Elapsed time is 1.031308 seconds.
```

```
title('ode45')

subplot(1,2,2)
disp(' ')



disp('ode23 stats:')
```

```
ode23 stats:
```

```
tic, ode23(@(t,y) -lambda*y, tspan, y0, opts), toc
```

```
822 successful steps
2 failed attempts
2473 function evaluations
Elapsed time is 0.823940 seconds.
```

```
title('ode23')
```

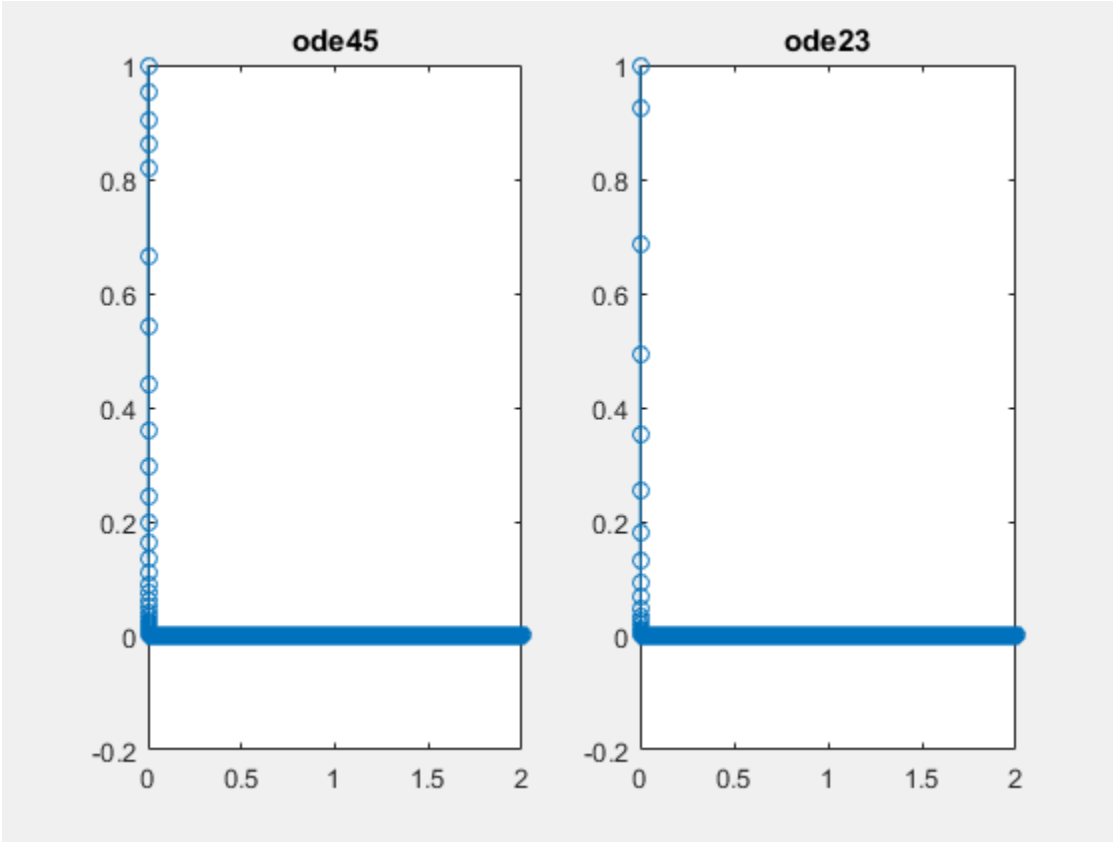

For this moderately stiff problem, `ode23` executes slightly faster than `ode45` and also has fewer failed steps. The step sizes taken by `ode45` and `ode23` for this problem are limited by the stability requirements of the equation rather than by accuracy. Since steps taken by `ode23` are cheaper than with `ode45`, the `ode23` solver executes quicker even though it takes more steps.

Input Arguments

`odefun` — Functions to solve
function handle

Functions to solve, specified as a function handle which defines the functions to be integrated.

The function `dydt = odefun(t,y)`, for a scalar `t` and a column vector `y`, must return a column vector `dydt` of data type `single` or `double` that corresponds to $f(t,y)$. `odefun` must accept both input arguments, `t` and `y`, even if one of the arguments is not used in the function.

For example, to solve $y' = 5y - 3$, use the function:

```
function dydt = odefun(t,y)
dydt = 5*y-3;
```

For a system of equations, the output of `odefun` is a vector. Each element in the vector is the solution to one equation. For example, to solve

$$y'_1 = y_1 + 2y_2$$
$$y'_2 = 3y_1 + 2y_2$$

use the function:

```
function dydt = odefun(t,y)
dydt = zeros(2,1);
dydt(1) = y(1)+2*y(2);
dydt(2) = 3*y(1)+2*y(2);
```

For information on how to provide additional parameters to the function `odefun`, see "Parameterizing Functions".

Example: `@myFcn`

Data Types: `function_handle`

`tspan` — Interval of integration

vector

Interval of integration, specified as a vector. At minimum, `tspan` must be a two element vector `[t0 tf]` specifying the initial and final times. To obtain solutions at specific times between `t0` and `tf`, use a longer vector of the form `[t0,t1,t2,...,tf]`. The elements in `tspan` must be all increasing or all decreasing.

The solver imposes the initial conditions, `y0`, at `tspan(1)`, then integrates from `tspan(1)` to `tspan(end)`:

- If `tspan` has two elements, `[t0 tf]`, then the solver returns the solution evaluated at each internal integration step within the interval.
- If `tspan` contains more than two elements `[t0,t1,t2,...,tf]`, then the solver returns the solution evaluated at the given points. This does *not* affect the internal steps that the solver uses to traverse from `tspan(1)` to `tspan(end)`. Thus, the solver does not necessarily step precisely to each point specified in `tspan`. However, the solutions produced at the specified points are of the same order of accuracy as the solutions computed at each internal step.

  Specifying several intermediate points has little effect on the efficiency of computation, but for large systems it can affect memory management.

The solution obtained by the solver might be different depending on whether you specify `tspan` as a two-element vector or as a vector with intermediate points. If `tspan` contains several intermediate points, then they give an indication of the scale for the problem, which can affect the size of the initial step taken by the solver.

Example: `[1 10]`

Example: `[1 3 5 7 9 10]`

Data Types: `single` | `double`

`y0` — Initial conditions
vector

Initial conditions, specified as a vector. `y0` must be the same length as the vector output of `odefun`, so that `y0` contains an initial condition for each equation defined in `odefun`.

Data Types: `single` | `double`

`options` — Option structure
structure array

Option structure, specified as a structure array. Use the `odeset` function to create or modify the options structure. See “Summary of ODE Options” for a list of the options compatible with each solver.

Example: `options = odeset('RelTol',1e-5,'Stats','on','OutputFcn',@odeplot)` specifies a

relative error tolerance of `1e-5`, turns on the display of solver statistics, and specifies the output function `@odeplot` to plot the solution as it is computed.

Data Types: `struct`

Output Arguments

`t` — Evaluation points
column vector

Evaluation points, returned as a column vector.

- If `tspan` contains two elements, `[t0 tf]`, then `t` contains the internal evaluation points used to perform the integration.
- If `tspan` contains more than two elements, then `t` is the same as `tspan`.

`y` — Solutions
array

Solutions, returned as an array. Each row in `y` corresponds to the solution at the value returned in the corresponding row of `t`.

`te` — Time of events
column vector

Time of events, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ye` — Solution at time of events
array

Solution at time of events, returned as an array. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ie` — Index of vanishing event function
column vector

Index of vanishing event function, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`sol` — Structure for evaluation
structure array

Structure for evaluation, returned as a structure array. Use this structure with the `deval` function to evaluate the solution at any point in the interval `[t0 tf]`. The `sol` structure array always includes these fields:

Structure Field	Description
`sol.x`	Row vector of the steps chosen by the solver.
`sol.y`	Solutions. Each column `sol.y(:,i)` contains the solution at time `sol.x(i)`.
`sol.solver`	Solver name.

Additionally, if you specify the `Events` option and events are detected, then `sol` also includes these fields:

Structure Field	Description
`sol.xe`	Points when events occurred. `sol.xe(end)` contains the exact point of a terminal event, if any.
`sol.ye`	Solutions that correspond to events in `sol.xe`.
`sol.ie`	Indices into the vector returned by the function specified in the `Events` option. The values indicate which event the solver detected.

Algorithms

`ode23` is an implementation of an explicit Runge-Kutta (2,3) pair of Bogacki and Shampine. It may be more efficient than `ode45` at crude tolerances and in the presence of moderate stiffness. `ode23` is a single-step solver [1], [2].

References

[1] Bogacki, P. and L. F. Shampine, “A 3(2) pair of Runge-Kutta formulas,” *Appl. Math. Letters*, Vol. 2, 1989, pp. 321–325.

[2] Shampine, L. F. and M. W. Reichelt, "The MATLAB ODE Suite," *SIAM Journal on Scientific Computing*, Vol. 18, 1997, pp. 1–22.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- All `odeset` option arguments must be constant.
- Code generation does not support a constant mass matrix in the options structure. Provide a mass matrix as a function.
- You must provide at least the two output arguments `T` and `Y`.
- Input types must be homogeneous—all double or all single.
- Variable-sizing support must be enabled. Code generation requires dynamic memory allocation when `tspan` has two elements or you use event functions.

See Also

See Also

`deval` | `ode45` | `odeget` | `odeset` | `odextend`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"
"Solve Nonstiff ODEs"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

ode23s

Solve stiff differential equations — low order method

Syntax

```
[t,y] = ode23s(odefun,tspan,y0)
[t,y] = ode23s(odefun,tspan,y0,options)
[t,y,te,ye,ie] = ode23s(odefun,tspan,y0,options)
sol = ode23s( ___ )
```

Description

`[t,y] = ode23s(odefun,tspan,y0)`, where `tspan = [t0 tf]`, integrates the system of differential equations $y' = f(t, y)$ from `t0` to `tf` with initial conditions `y0`. Each row in the solution array `y` corresponds to a value returned in column vector `t`.

All MATLAB ODE solvers can solve systems of equations of the form $y' = f(t, y)$, or problems that involve a mass matrix, $M(t, y)y' = f(t, y)$. The solvers all use similar syntaxes. The `ode23s` solver only can solve problems with a mass matrix if the mass matrix is constant. `ode15s` and `ode23t` can solve problems with a mass matrix that is singular, known as differential-algebraic equations (DAEs). Specify the mass matrix using the `Mass` option of `odeset`.

`[t,y] = ode23s(odefun,tspan,y0,options)` also uses the integration settings defined by `options`, which is an argument created using the `odeset` function. For example, use the `AbsTol` and `RelTol` options to specify absolute and relative error tolerances, or the `Mass` option to provide a mass matrix.

`[t,y,te,ye,ie] = ode23s(odefun,tspan,y0,options)` additionally finds where functions of (*t*,*y*), called event functions, are zero. In the output, `te` is the time of the event, `ye` is the solution at the time of the event, and `ie` is the index of the triggered event.

For each event function, specify whether the integration is to terminate at a zero and whether the direction of the zero crossing matters. Do this by setting the `'Events'`

property to a function, such as `myEventFcn` or `@myEventFcn`, and creating a corresponding function: `[value,isterminal,direction] = myEventFcn(t,y)`. For more information, see "ODE Event Location".

`sol = ode23s( ___ )` returns a structure that you can use with `deval` to evaluate the solution at any point on the interval `[t0 tf]`. You can use any of the input argument combinations in previous syntaxes.

Examples

ODE With Single Solution Component

Simple ODEs that have a single solution component can be specified as an anonymous function in the call to the solver. The anonymous function must accept two inputs `(t,y)` even if one of the inputs is not used.

Solve the ODE

$$y' = -10t.$$

Use a time interval of `[0,2]` and the initial condition `y0 = 1`.

```
tspan = [0 2];
y0 = 1;
[t,y] = ode23s(@(t,y) -10*t, tspan, y0);
```

Plot the solution.

```
plot(t,y,'-o')
```

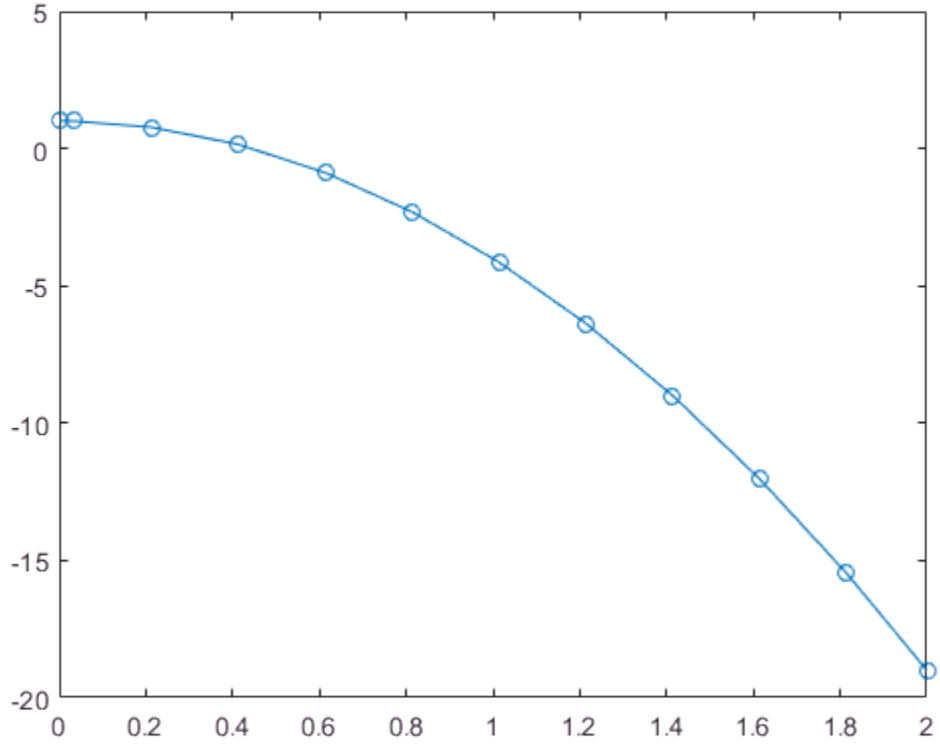

Solve Stiff ODE

An example of a stiff system of equations is the van der Pol equations in relaxation oscillation. The limit cycle has regions where the solution components change slowly and the problem is quite stiff, alternating with regions of very sharp change where it is not stiff.

The system of equations is:

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= 1000(1 - y_1^2)y_2 - y_1 \end{aligned}$$

The initial conditions are $y_1(0) = 2$ and $y_2(0) = 0$. The function `vdp1000` ships with MATLAB® and encodes the equations.

```
function dydt = vdp1000(t,y)
%VDP1000  Evaluate the van der Pol ODEs for mu = 1000.
%
%   See also ODE15S, ODE23S, ODE23T, ODE23TB.

%   Jacek Kierzenka and Lawrence F. Shampine
%   Copyright 1984-2014 The MathWorks, Inc.

dydt = [y(2); 1000*(1-y(1)^2)*y(2)-y(1)];
```

Solving this system using `ode45` with the default relative and absolute error tolerances (`1e-3` and `1e-6`, respectively) is extremely slow, requiring several minutes to solve and plot the solution. `ode45` requires millions of time steps to complete the integration, due to the areas of stiffness where it struggles to meet the tolerances.

This is a plot of the solution obtained by `ode45`, which takes a long time to compute. Notice the enormous number of time steps required to pass through areas of stiffness.

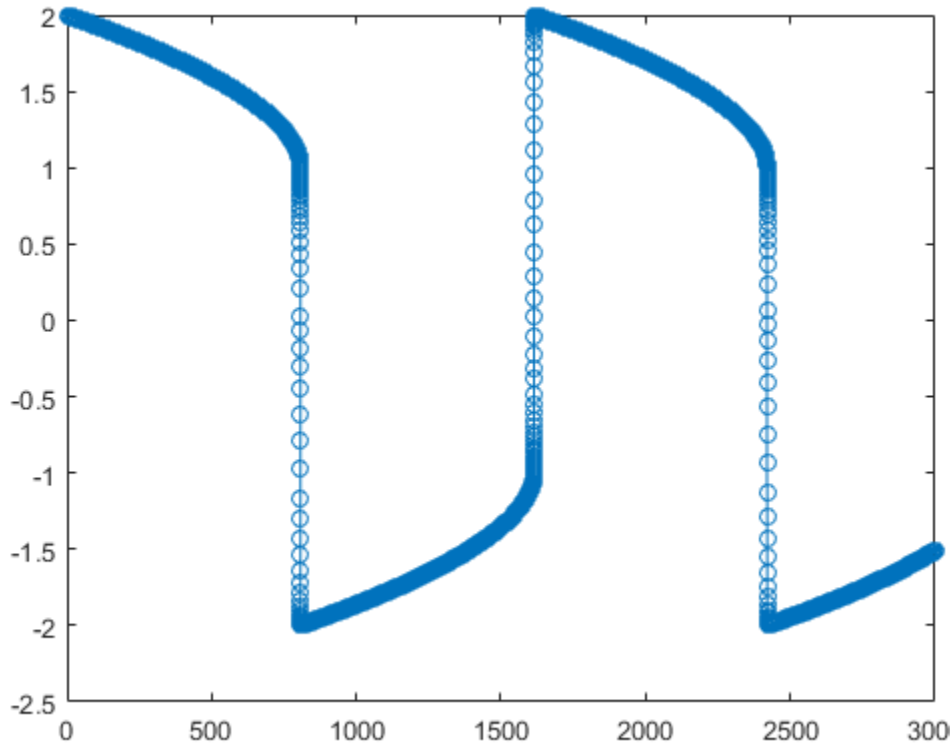

Solve the stiff system using the `ode23s` solver, and then plot the first column of the solution `y` against the time points `t`. The `ode23s` solver passes through stiff areas with far fewer steps than `ode45`.

```
[t,y] = ode23s(@vdp1000,[0 3000],[2 0]);
plot(t,y(:,1),'-o')
```

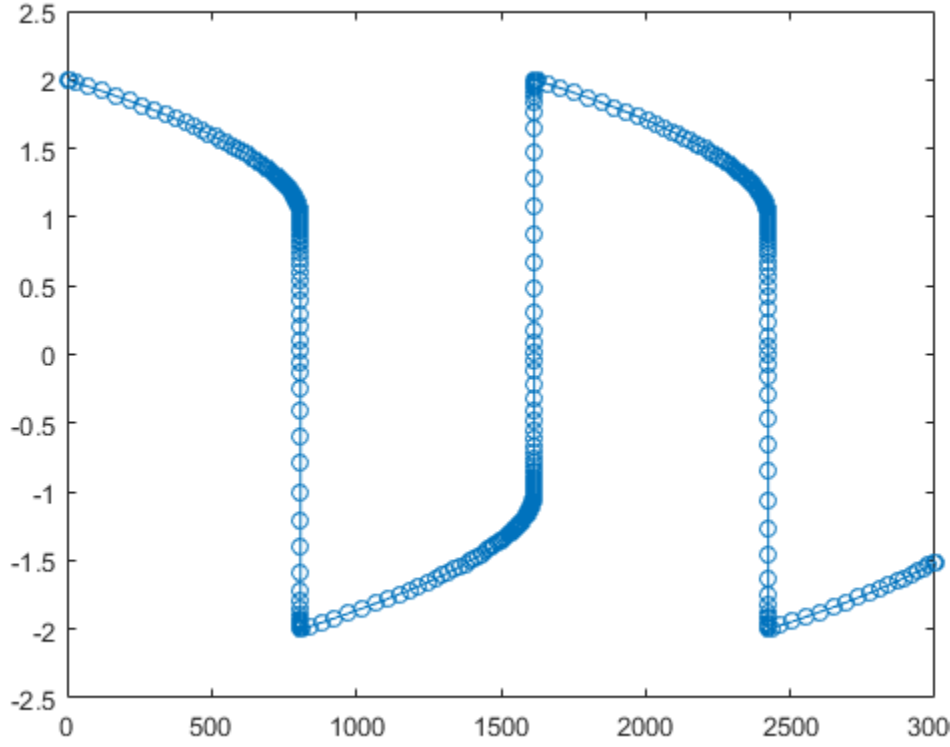

Pass Extra Parameters to ODE Function

`ode23s` only works with functions that use two input arguments, `t` and `y`. However, you can pass in extra parameters by defining them outside the function and passing them in when you specify the function handle.

Solve the ODE

$$y'' = \frac{A}{B} t y.$$

Rewriting the equation as a first-order system yields

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= \frac{A}{B} t y_1. \end{aligned}$$

`odefcn.m` represents this system of equations as a function that accepts four input arguments: `t`, `y`, `A`, and `B`.

```
function dydt = odefcn(t,y,A,B)
dydt = zeros(2,1);
dydt(1) = y(2);
dydt(2) = (A/B)*t.*y(1);
```

Solve the ODE using `ode23s`. Specify the function handle such that it passes in the predefined values for `A` and `B` to `odefcn`.

```
A = 1;
B = 2;
tspan = [0 5];
y0 = [0 0.01];
[t,y] = ode23s(@(t,y) odefcn(t,y,A,B), tspan, y0);
```

Plot the results.

```
plot(t,y(:,1),'-o',t,y(:,2),'-.')
```

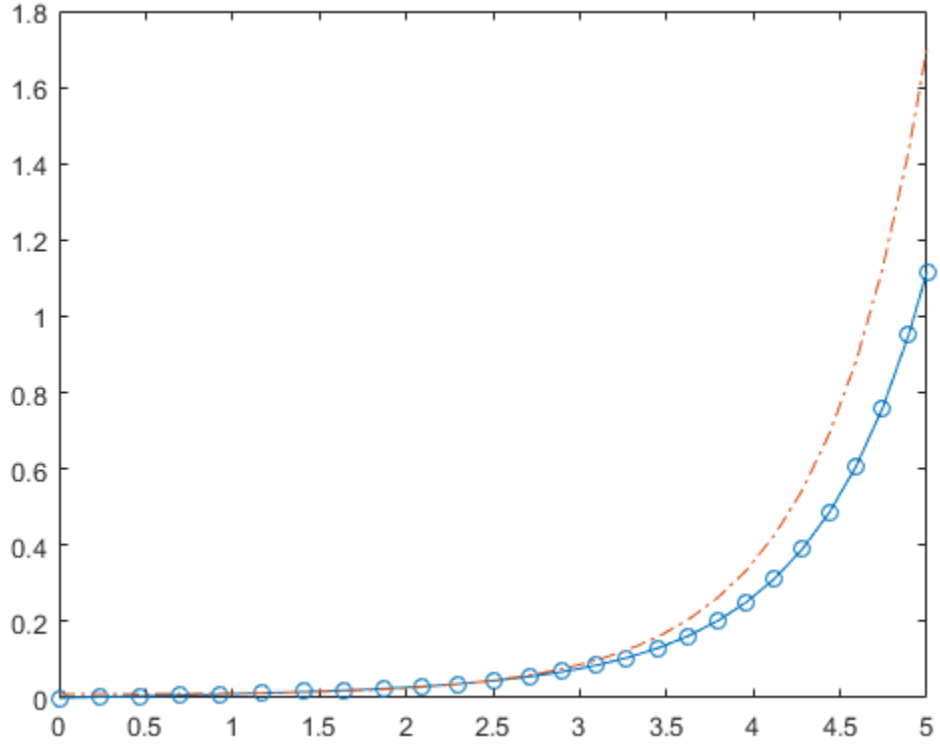

Compare Stiff ODE Solvers

The `ode15s` solver is a good first choice for most stiff problems. However, the other stiff solvers might be more efficient for certain types of problems. This example solves a stiff test equation using all four stiff ODE solvers.

Consider the test equation

$$y' = -\lambda y.$$

The equation becomes increasingly stiff as the magnitude of λ increases. Use $\lambda = 1 \times 10^9$ and the initial condition $y(0) = 1$ over the time interval `[0 0.5]`. With

these values, the problem is stiff enough that `ode45` and `ode23` struggle to integrate the equation. Also, use `odeset` to pass in the constant Jacobian $J = \frac{\partial f}{\partial y} = -\lambda$ and turn on the display of solver statistics.

```
lambda = 1e9;
opts = odeset('Stats','on','Jacobian',-lambda);
tspan = [0 0.5];
y0 = 1;
subplot(2,2,1)
disp('ode15s stats:')
```

```
ode15s stats:
```

```
tic, ode15s(@(t,y) -lambda*y, tspan, y0, opts), toc
```

```
104 successful steps
1 failed attempts
212 function evaluations
0 partial derivatives
21 LU decompositions
210 solutions of linear systems
Elapsed time is 0.760013 seconds.
```

```
title('ode15s')

subplot(2,2,2)
disp(' ')



disp('ode23s stats:')
```

```
ode23s stats:
```

```
tic, ode23s(@(t,y) -lambda*y, tspan, y0, opts), toc
```

```
63 successful steps
0 failed attempts
191 function evaluations
0 partial derivatives
63 LU decompositions
189 solutions of linear systems
Elapsed time is 0.244000 seconds.
```

```
title('ode23s')

subplot(2,2,3)
disp(' ')



disp('ode23t stats:')

ode23t stats:

tic, ode23t(@(t,y) -lambda*y, tspan, y0, opts), toc

95 successful steps
0 failed attempts
125 function evaluations
0 partial derivatives
28 LU decompositions
123 solutions of linear systems
Elapsed time is 0.356294 seconds.

title('ode23t')

subplot(2,2,4)
disp(' ')



disp('ode23tb stats:')

ode23tb stats:

tic, ode23tb(@(t,y) -lambda*y, tspan, y0, opts), toc

71 successful steps
0 failed attempts
167 function evaluations
0 partial derivatives
23 LU decompositions
236 solutions of linear systems
Elapsed time is 0.307926 seconds.

title('ode23tb')
```

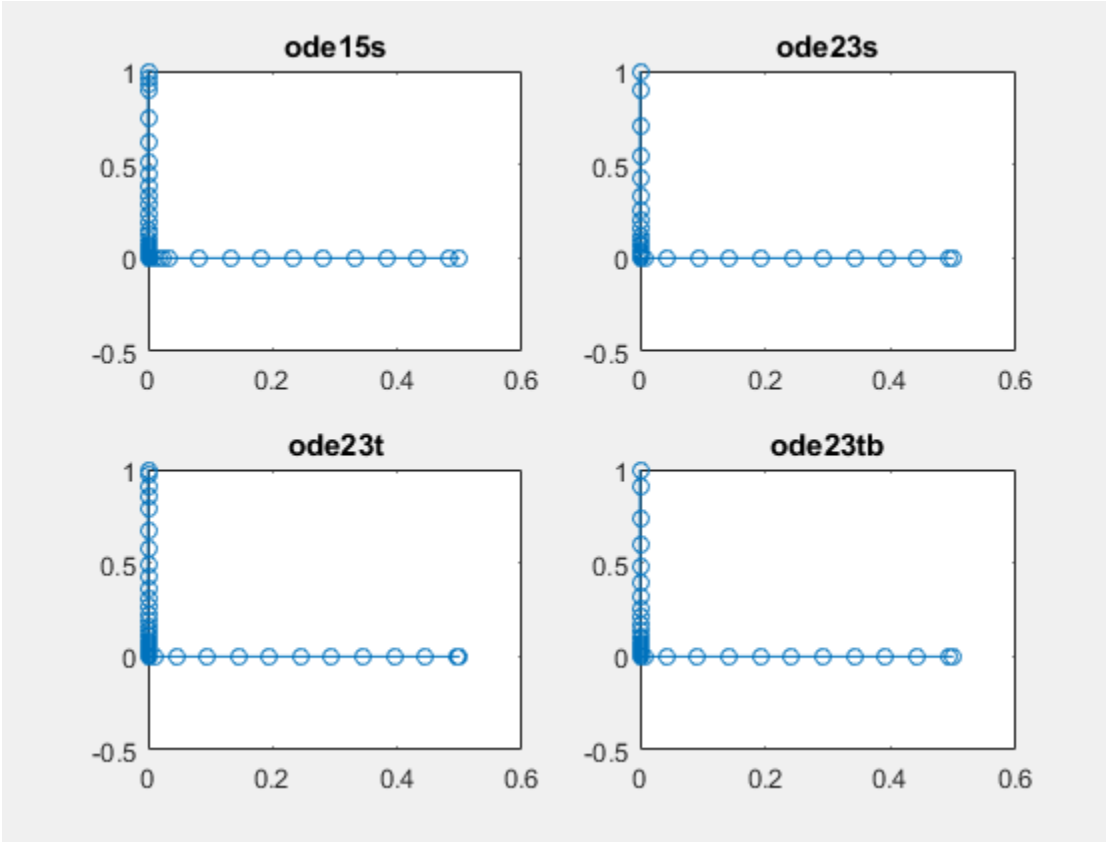

The stiff solvers all perform well, but `ode23s` completes the integration with the fewest steps and runs the fastest for this particular problem. Since the constant Jacobian is specified, none of the solvers need to calculate partial derivatives to compute the solution. Specifying the Jacobian benefits `ode23s` the most since it normally evaluates the Jacobian in every step.

For general stiff problems, the performance of the stiff solvers varies depending on the format of the problem and specified options. Providing the Jacobian matrix or sparsity pattern always improves solver efficiency for stiff problems. But since the stiff solvers use the Jacobian differently, the improvement can vary significantly. Practically speaking, if a system of equations is very large or needs to be solved many times, then it is worthwhile to investigate the performance of the different solvers to minimize execution time.

Input Arguments

odefun — Functions to solve
function handle

Functions to solve, specified as a function handle which defines the functions to be integrated.

The function `dydt = odefun(t,y)`, for a scalar `t` and a column vector `y`, must return a column vector `dydt` of data type `single` or `double` that corresponds to $f(t,y)$. `odefun` must accept both input arguments, `t` and `y`, even if one of the arguments is not used in the function.

For example, to solve $y' = 5y - 3$, use the function:

```
function dydt = odefun(t,y)
dydt = 5*y-3;
```

For a system of equations, the output of `odefun` is a vector. Each element in the vector is the solution to one equation. For example, to solve

$$y'_1 = y_1 + 2y_2$$
$$y'_2 = 3y_1 + 2y_2$$

use the function:

```
function dydt = odefun(t,y)
dydt = zeros(2,1);
dydt(1) = y(1)+2*y(2);
dydt(2) = 3*y(1)+2*y(2);
```

For information on how to provide additional parameters to the function `odefun`, see "Parameterizing Functions".

Example: `@myFcn`

Data Types: `function_handle`

`tspan` — Interval of integration

vector

Interval of integration, specified as a vector. At minimum, `tspan` must be a two element vector `[t0 tf]` specifying the initial and final times. To obtain solutions at specific times between `t0` and `tf`, use a longer vector of the form `[t0,t1,t2,...,tf]`. The elements in `tspan` must be all increasing or all decreasing.

The solver imposes the initial conditions, `y0`, at `tspan(1)`, then integrates from `tspan(1)` to `tspan(end)`:

- If `tspan` has two elements, `[t0 tf]`, then the solver returns the solution evaluated at each internal integration step within the interval.
- If `tspan` contains more than two elements `[t0,t1,t2,...,tf]`, then the solver returns the solution evaluated at the given points. This does *not* affect the internal steps that the solver uses to traverse from `tspan(1)` to `tspan(end)`. Thus, the solver does not necessarily step precisely to each point specified in `tspan`. However, the solutions produced at the specified points are of the same order of accuracy as the solutions computed at each internal step.

  Specifying several intermediate points has little effect on the efficiency of computation, but for large systems it can affect memory management.

The solution obtained by the solver might be different depending on whether you specify `tspan` as a two-element vector or as a vector with intermediate points. If `tspan` contains several intermediate points, then they give an indication of the scale for the problem, which can affect the size of the initial step taken by the solver.

Example: `[1 10]`

Example: `[1 3 5 7 9 10]`

Data Types: `single` | `double`

`y0` — Initial conditions

vector

Initial conditions, specified as a vector. `y0` must be the same length as the vector output of `odefun`, so that `y0` contains an initial condition for each equation defined in `odefun`.

Data Types: `single` | `double`

`options` — Option structure

structure array

Option structure, specified as a structure array. Use the `odeset` function to create or modify the options structure. See "Summary of ODE Options" for a list of the options compatible with each solver.

Example: `options = odeset('RelTol',1e-5,'Stats','on','OutputFcn',@odeplot)` specifies a relative error tolerance of `1e-5`, turns on the display of solver statistics, and specifies the output function `@odeplot` to plot the solution as it is computed.

Data Types: `struct`

Output Arguments

`t` — Evaluation points

column vector

Evaluation points, returned as a column vector.

- If `tspan` contains two elements, `[t0 tf]`, then `t` contains the internal evaluation points used to perform the integration.
- If `tspan` contains more than two elements, then `t` is the same as `tspan`.

`y` — Solutions

array

Solutions, returned as an array. Each row in `y` corresponds to the solution at the value returned in the corresponding row of `t`.

`te` — Time of events

column vector

Time of events, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ye` — Solution at time of events

array

Solution at time of events, returned as an array. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ie` — Index of vanishing event function

column vector

Index of vanishing event function, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`sol` — Structure for evaluation
structure array

Structure for evaluation, returned as a structure array. Use this structure with the `deval` function to evaluate the solution at any point in the interval `[t0 tf]`. The `sol` structure array always includes these fields:

Structure Field	Description
`sol.x`	Row vector of the steps chosen by the solver.
`sol.y`	Solutions. Each column `sol.y(:,i)` contains the solution at time `sol.x(i)`.
`sol.solver`	Solver name.

Additionally, if you specify the `Events` option and events are detected, then `sol` also includes these fields:

Structure Field	Description
`sol.xe`	Points when events occurred. `sol.xe(end)` contains the exact point of a terminal event, if any.
`sol.ye`	Solutions that correspond to events in `sol.xe`.
`sol.ie`	Indices into the vector returned by the function specified in the `Events` option. The values indicate which event the solver detected.

Algorithms

`ode23s` is based on a modified Rosenbrock formula of order 2. Because it is a single-step solver, it may be more efficient than `ode15s` at solving problems that permit crude tolerances or problems with solutions that change rapidly. It can solve some kinds of stiff

problems for which `ode15s` is not effective. The `ode23s` solver evaluates the Jacobian during each step of the integration, so supplying it with the Jacobian matrix is critical to its reliability and efficiency [1].

References

[1] Shampine, L. F. and M. W. Reichelt, "The MATLAB ODE Suite," *SIAM Journal on Scientific Computing*, Vol. 18, 1997, pp. 1–22.

See Also

See Also

`deval` | `ode15s` | `odeget` | `odeset`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"
"Solve Stiff ODEs"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

ode23t

Solve moderately stiff ODEs and DAEs — trapezoidal rule

Syntax

```
[t,y] = ode23t(odefun,tspan,y0)
[t,y] = ode23t(odefun,tspan,y0,options)
[t,y,te,ye,ie] = ode23t(odefun,tspan,y0,options)
sol = ode23t( ___ )
```

Description

`[t,y] = ode23t(odefun,tspan,y0)`, where `tspan = [t0 tf]`, integrates the system of differential equations $y' = f(t, y)$ from `t0` to `tf` with initial conditions `y0`. Each row in the solution array `y` corresponds to a value returned in column vector `t`.

All MATLAB ODE solvers can solve systems of equations of the form $y' = f(t, y)$, or problems that involve a mass matrix, $M(t, y)y' = f(t, y)$. The solvers all use similar syntaxes. The `ode23s` solver only can solve problems with a mass matrix if the mass matrix is constant. `ode15s` and `ode23t` can solve problems with a mass matrix that is singular, known as differential-algebraic equations (DAEs). Specify the mass matrix using the `Mass` option of `odeset`.

`[t,y] = ode23t(odefun,tspan,y0,options)` also uses the integration settings defined by `options`, which is an argument created using the `odeset` function. For example, use the `AbsTol` and `RelTol` options to specify absolute and relative error tolerances, or the `Mass` option to provide a mass matrix.

`[t,y,te,ye,ie] = ode23t(odefun,tspan,y0,options)` additionally finds where functions of (*t*,*y*), called event functions, are zero. In the output, `te` is the time of the event, `ye` is the solution at the time of the event, and `ie` is the index of the triggered event.

For each event function, specify whether the integration is to terminate at a zero and whether the direction of the zero crossing matters. Do this by setting the `'Events'`

property to a function, such as `myEventFcn` or `@myEventFcn`, and creating a corresponding function: `[value,isterminal,direction] = myEventFcn(t,y)`. For more information, see "ODE Event Location".

`sol = ode23t( ___ )` returns a structure that you can use with `deval` to evaluate the solution at any point on the interval `[t0 tf]`. You can use any of the input argument combinations in previous syntaxes.

Examples

ODE With Single Solution Component

Simple ODEs that have a single solution component can be specified as an anonymous function in the call to the solver. The anonymous function must accept two inputs `(t,y)` even if one of the inputs is not used.

Solve the ODE

$$y' = -10t.$$

Use a time interval of `[0,2]` and the initial condition `y0 = 1`.

```
tspan = [0 2];
y0 = 1;
[t,y] = ode23t(@(t,y) -10*t, tspan, y0);
```

Plot the solution.

```
plot(t,y,'-o')
```

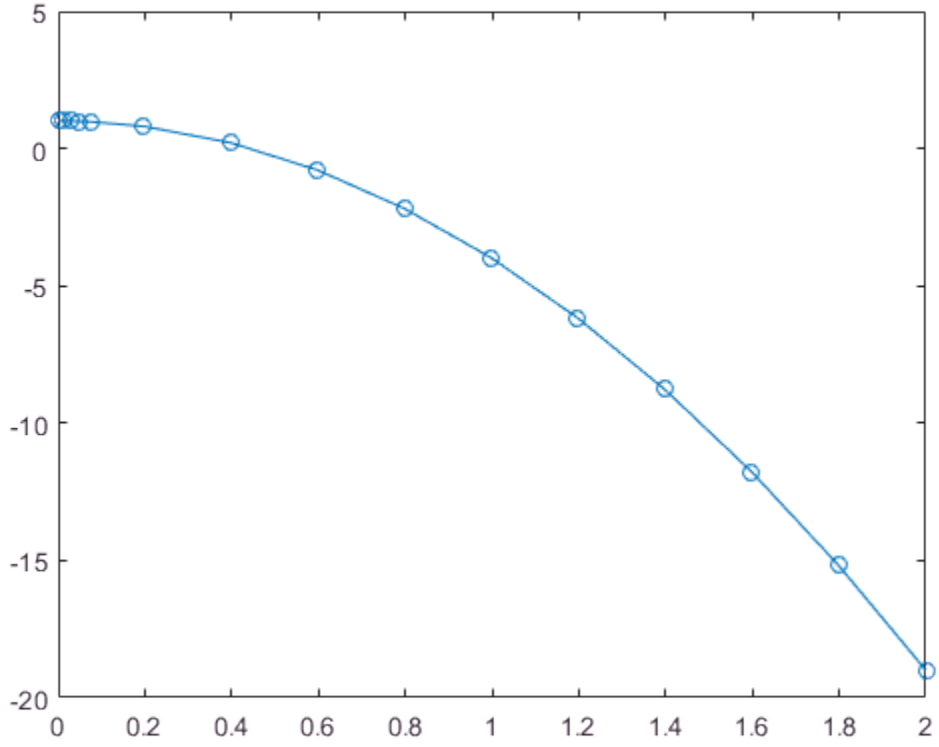

Solve Stiff ODE

An example of a stiff system of equations is the van der Pol equations in relaxation oscillation. The limit cycle has regions where the solution components change slowly and the problem is quite stiff, alternating with regions of very sharp change where it is not stiff.

The system of equations is:

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= 1000(1 - y_1^2)y_2 - y_1 \end{aligned}$$

The initial conditions are $y_1(0) = 2$ and $y_2(0) = 0$. The function `vdp1000` ships with MATLAB® and encodes the equations.

```
function dydt = vdp1000(t,y)
%VDP1000  Evaluate the van der Pol ODEs for mu = 1000.
%
%   See also ODE15S, ODE23S, ODE23T, ODE23TB.

%   Jacek Kierzenka and Lawrence F. Shampine
%   Copyright 1984-2014 The MathWorks, Inc.

dydt = [y(2); 1000*(1-y(1)^2)*y(2)-y(1)];
```

Solving this system using `ode45` with the default relative and absolute error tolerances (`1e-3` and `1e-6`, respectively) is extremely slow, requiring several minutes to solve and plot the solution. `ode45` requires millions of time steps to complete the integration, due to the areas of stiffness where it struggles to meet the tolerances.

This is a plot of the solution obtained by `ode45`, which takes a long time to compute. Notice the enormous number of time steps required to pass through areas of stiffness.

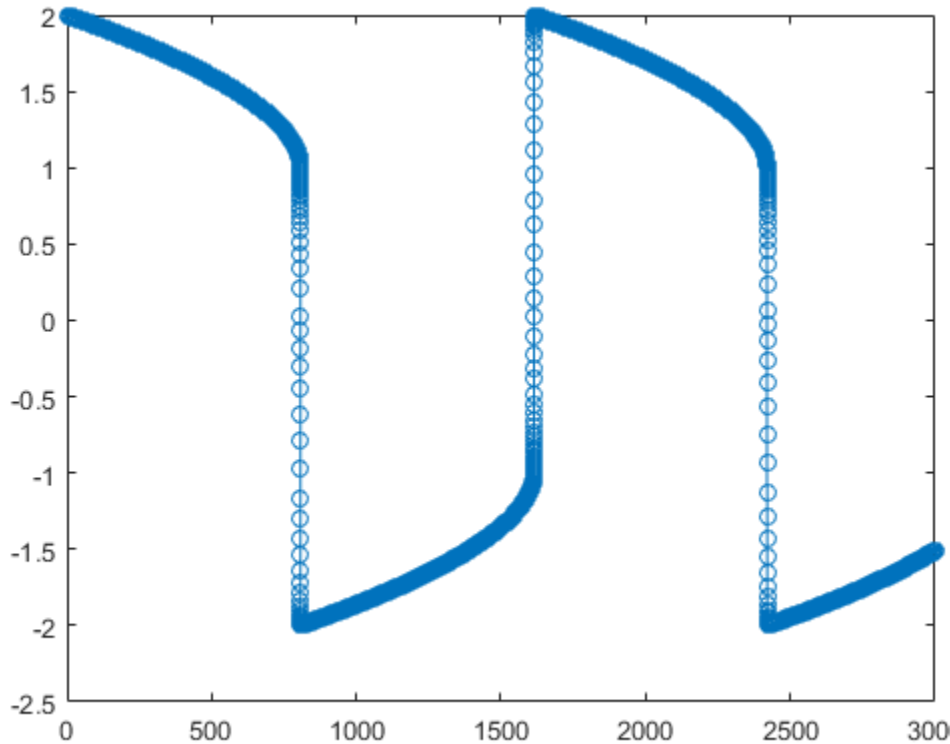

Solve the stiff system using the `ode23t` solver, and then plot the first column of the solution `y` against the time points `t`. The `ode23t` solver passes through stiff areas with far fewer steps than `ode45`.

```
[t,y] = ode23t(@vdp1000,[0 3000],[2 0]);
plot(t,y(:,1),'-o')
```

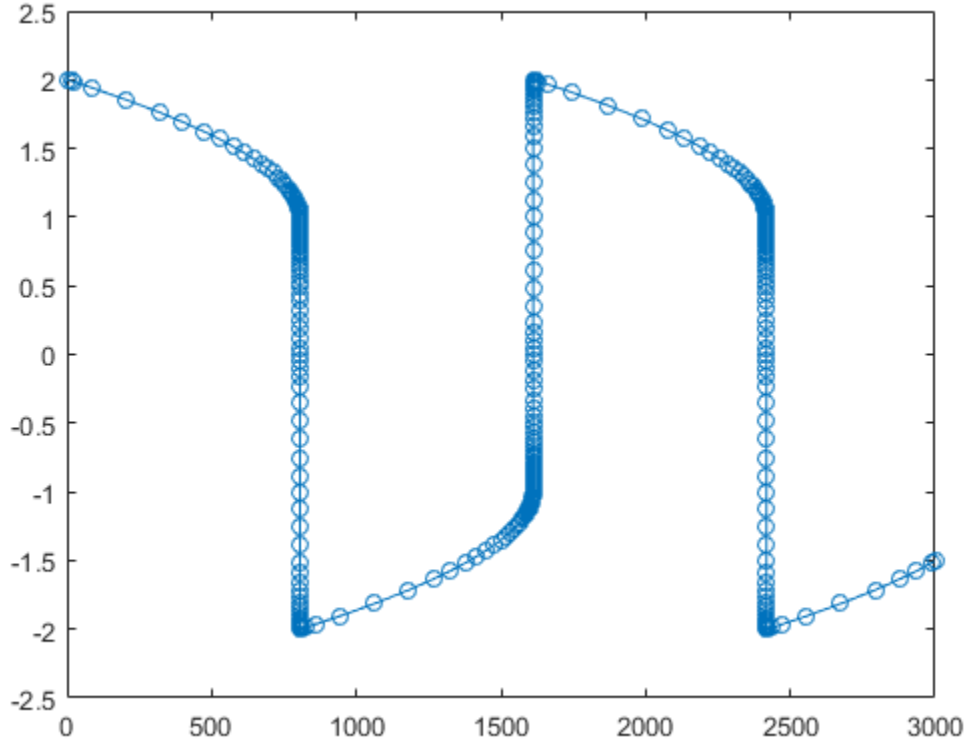

Pass Extra Parameters to ODE Function

`ode23t` only works with functions that use two input arguments, `t` and `y`. However, you can pass in extra parameters by defining them outside the function and passing them in when you specify the function handle.

Solve the ODE

$$y'' = \frac{A}{B} t y.$$

Rewriting the equation as a first-order system yields

$$
\begin{aligned}
y_1' &= y_2 \\
y_2' &= \frac{A}{B} t y_1.
\end{aligned}
$$

odefcn.m represents this system of equations as a function that accepts four input arguments: t, y, A, and B.

```
function dydt = odefcn(t,y,A,B)
dydt = zeros(2,1);
dydt(1) = y(2);
dydt(2) = (A/B)*t.*y(1);
```

Solve the ODE using ode23t. Specify the function handle such that it passes in the predefined values for A and B to odefcn.

```
A = 1;
B = 2;
tspan = [0 5];
y0 = [0 0.01];
[t,y] = ode23t(@(t,y) odefcn(t,y,A,B), tspan, y0);
```

Plot the results.

```
plot(t,y(:,1),'-o',t,y(:,2),'-.')
```

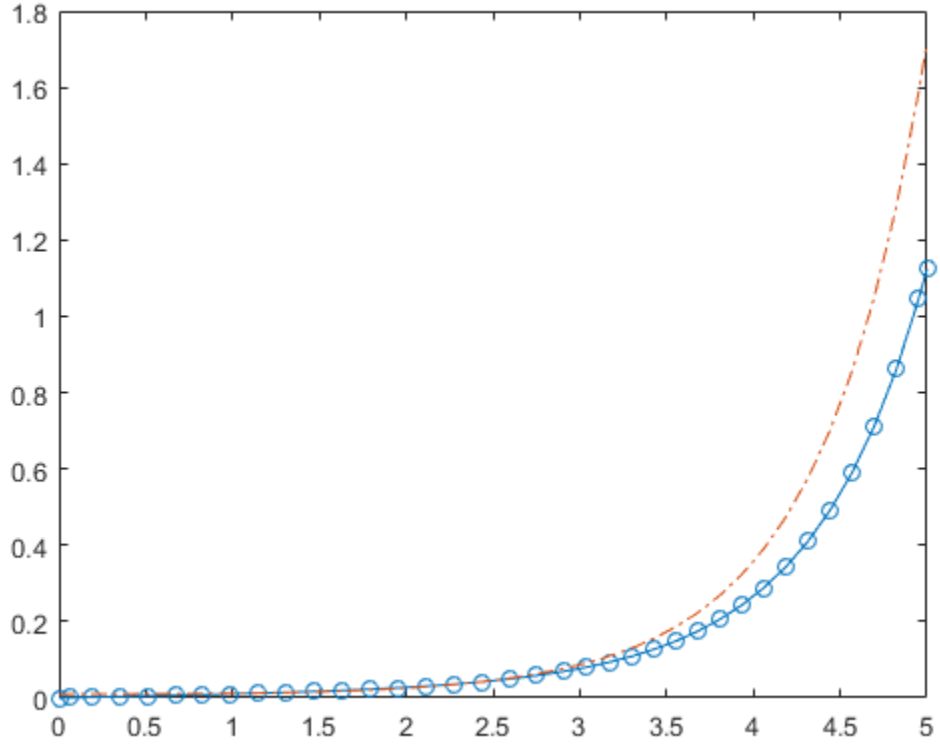

Compare Stiff ODE Solvers

The `ode15s` solver is a good first choice for most stiff problems. However, the other stiff solvers might be more efficient for certain types of problems. This example solves a stiff test equation using all four stiff ODE solvers.

Consider the test equation

$$y' = -\lambda y.$$

The equation becomes increasingly stiff as the magnitude of λ increases. Use $\lambda = 1 \times 10^9$ and the initial condition $y(0) = 1$ over the time interval `[0 0.5]`. With

these values, the problem is stiff enough that `ode45` and `ode23` struggle to integrate the equation. Also, use `odeset` to pass in the constant Jacobian $J = \frac{\partial f}{\partial y} = -\lambda$ and turn on the display of solver statistics.

```
lambda = 1e9;
opts = odeset('Stats','on','Jacobian',-lambda);
tspan = [0 0.5];
y0 = 1;
subplot(2,2,1)
disp('ode15s stats:')
```

```
ode15s stats:
```

```
tic, ode15s(@(t,y) -lambda*y, tspan, y0, opts), toc
```

```
104 successful steps
1 failed attempts
212 function evaluations
0 partial derivatives
21 LU decompositions
210 solutions of linear systems
Elapsed time is 0.760013 seconds.
```

```
title('ode15s')

subplot(2,2,2)
disp(' ')



disp('ode23s stats:')
```

```
ode23s stats:
```

```
tic, ode23s(@(t,y) -lambda*y, tspan, y0, opts), toc
```

```
63 successful steps
0 failed attempts
191 function evaluations
0 partial derivatives
63 LU decompositions
189 solutions of linear systems
Elapsed time is 0.244000 seconds.
```

```
title('ode23s')

subplot(2,2,3)
disp(' ')



disp('ode23t stats:')

ode23t stats:

tic, ode23t(@(t,y) -lambda*y, tspan, y0, opts), toc

95 successful steps
0 failed attempts
125 function evaluations
0 partial derivatives
28 LU decompositions
123 solutions of linear systems
Elapsed time is 0.356294 seconds.

title('ode23t')

subplot(2,2,4)
disp(' ')



disp('ode23tb stats:')

ode23tb stats:

tic, ode23tb(@(t,y) -lambda*y, tspan, y0, opts), toc

71 successful steps
0 failed attempts
167 function evaluations
0 partial derivatives
23 LU decompositions
236 solutions of linear systems
Elapsed time is 0.307926 seconds.

title('ode23tb')
```

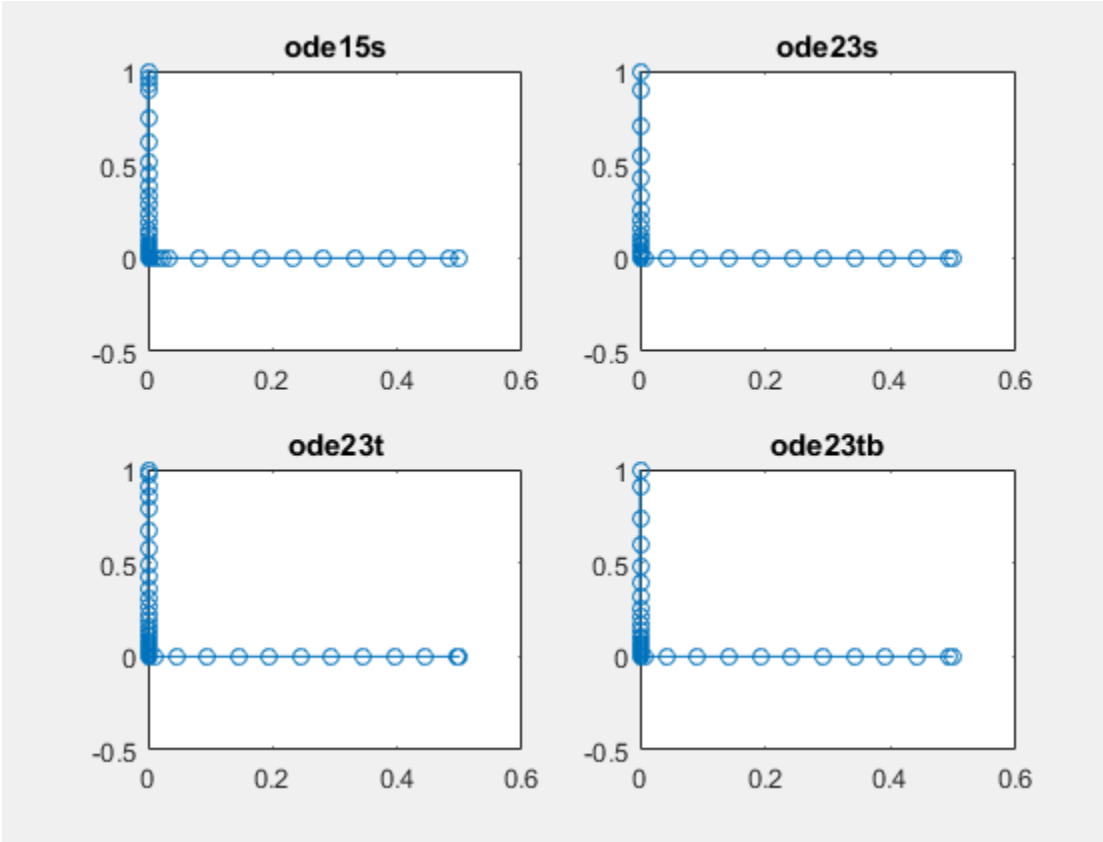

The stiff solvers all perform well, but `ode23s` completes the integration with the fewest steps and runs the fastest for this particular problem. Since the constant Jacobian is specified, none of the solvers need to calculate partial derivatives to compute the solution. Specifying the Jacobian benefits `ode23s` the most since it normally evaluates the Jacobian in every step.

For general stiff problems, the performance of the stiff solvers varies depending on the format of the problem and specified options. Providing the Jacobian matrix or sparsity pattern always improves solver efficiency for stiff problems. But since the stiff solvers use the Jacobian differently, the improvement can vary significantly. Practically speaking, if a system of equations is very large or needs to be solved many times, then it is worthwhile to investigate the performance of the different solvers to minimize execution time.

Solve Stiff Differential Algebraic Equation

This example shows how to use `ode23t` to solve a stiff differential algebraic equation (DAE) problem that arises from an electrical circuit. This problem is originally from p.377 of E. Hairer and G. Wanner, *Solving Ordinary Differential Equations II: Stiff and Differential-Algebraic Problems*, 2nd ed. (Berlin: Springer, 1996).

The one-transistor amplifier problem coded by amp1dae.m can be rewritten in semi-explicit form, but this example solves it in its original form $Mu' = \phi(u)$. The problem includes a constant, singular mass matrix that is not diagonal. The transistor amplifier circuit contains six resistors, three capacitors, and a transistor.

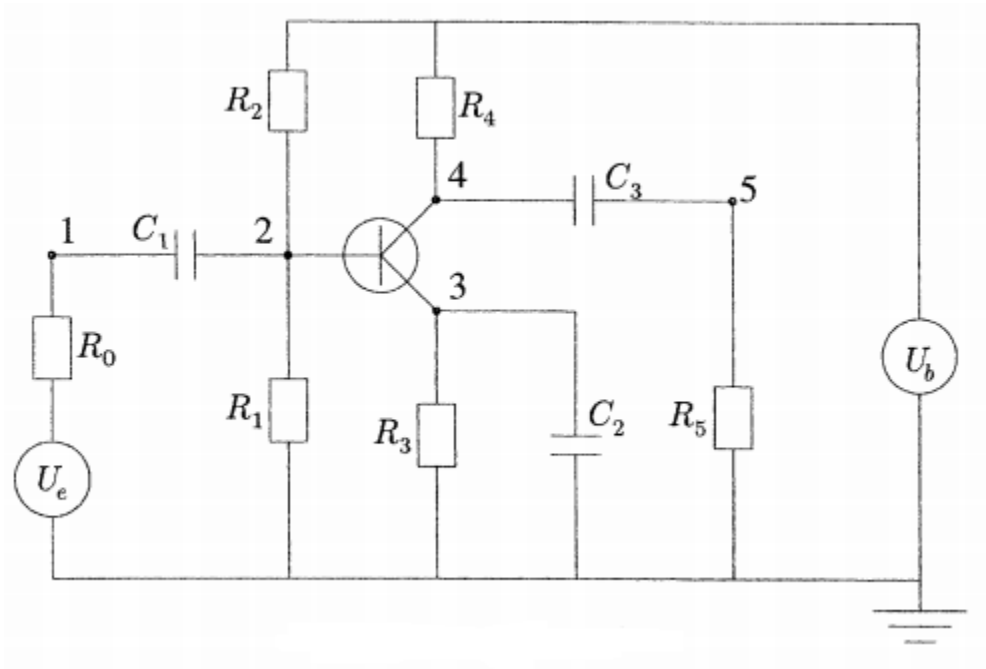

The initial voltage signal is $U_e(t) = 0.4 \sin(200\pi t)$, and the other parameters are constant. The goal is to solve for the output voltage through node 5.

Set the values of the initial and operating voltages.

```
Ue = @(t) 0.4*sin(200*pi*t);
```

```
Ub = 6;
```

Using Kirchoff's law to equalize the current through each node (1 through 5), you obtain a system of five equations. The mass matrix of this system has the form

$$M = \begin{pmatrix} -c_1 & c_1 & 0 & 0 & 0 \\ c_1 & -c_1 & 0 & 0 & 0 \\ 0 & 0 & -c_2 & 0 & 0 \\ 0 & 0 & 0 & -c_3 & c_3 \\ 0 & 0 & 0 & c_3 & -c_3 \end{pmatrix},$$

where $c_k = k \times 10^{-6}$ for $k = 1, 2, 3$.

Use the `odeset` function to pass in the mass matrix. Leave the `'MassSingular'` option at its default value of `'maybe'` to test the automatic detection of a DAE problem by the solver.

```
c = 1e-6 * (1:3);
M = zeros(5,5);
M(1,1) = -c(1);
M(1,2) =  c(1);
M(2,1) =  c(1);
M(2,2) = -c(1);
M(3,3) = -c(2);
M(4,4) = -c(3);
M(4,5) =  c(3);
M(5,4) =  c(3);
M(5,5) = -c(3);
opts = odeset('Mass',M);
```

The function `transampdae.m` contains the system of equations for this example. Save this function in your current folder to run the example.

```
function dudt = transampdae(t,u)
% Define voltages and constant parameters
Ue = @(t) 0.4*sin(200*pi*t);
Ub = 6;
R0 = 1000;
R15 = 9000;
alpha = 0.99;
```

```
beta = 1e-6;
Uf = 0.026;

f23 = beta*(exp((u(2) - u(3))/Uf) - 1);
dudt = [ -(Ue(t) - u(1))/R0
    -(Ub/R15 - u(2)*2/R15 - (1-alpha)*f23)
    -(f23 - u(3)/R15)
    -((Ub - u(4))/R15 - alpha*f23)
    (u(5)/R15) ];
end
```

Set the initial conditions. This example uses the consistent initial conditions computed by Hairer and Wanner.

```
u0(1) = 0;
u0(2) = Ub/2;
u0(3) = Ub/2;
u0(4) = Ub;
u0(5) = 0;
```

Solve the DAE system over the time interval `[0 0.05]` using `ode23t`.

```
tspan = [0 0.05];
[t,u] = ode23t(@transampdae,tspan,u0,opts);
```

Plot the initial voltage $U_e(t)$ and output voltage $U_5(t)$.

```
plot(t,Ue(t),'o',t,u(:,5),'.')
axis([0 0.05 -3 2]);
legend('Input Voltage U_e(t)','Output Voltage U_5(t)', 'Location', 'NorthWest');
title('One transistor amplifier DAE problem solved by ODE23T');
xlabel('t');
```

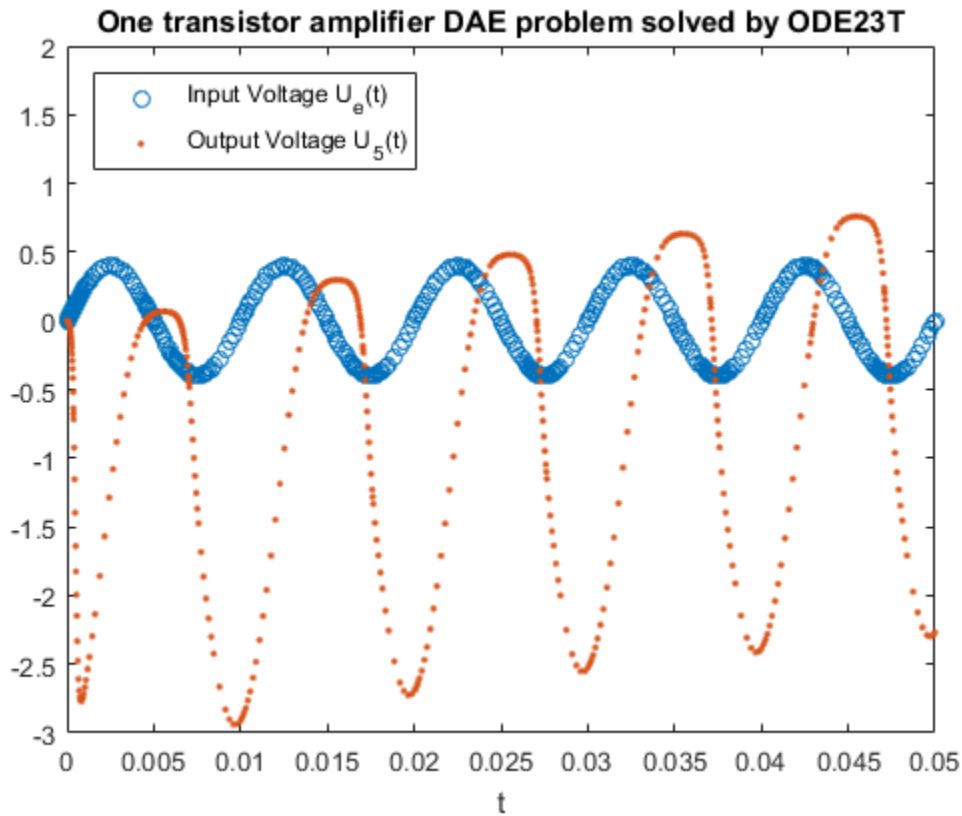

Input Arguments

`odefun` — Functions to solve
function handle

Functions to solve, specified as a function handle which defines the functions to be integrated.

The function `dydt = odefun(t,y)`, for a scalar `t` and a column vector `y`, must return a column vector `dydt` of data type `single` or `double` that corresponds to $f(t,y)$. `odefun`

must accept both input arguments, `t` and `y`, even if one of the arguments is not used in the function.

For example, to solve $y' = 5y - 3$, use the function:

```
function dydt = odefun(t,y)
dydt = 5*y-3;
```

For a system of equations, the output of `odefun` is a vector. Each element in the vector is the solution to one equation. For example, to solve

$$y'_1 = y_1 + 2y_2$$
$$y'_2 = 3y_1 + 2y_2$$

use the function:

```
function dydt = odefun(t,y)
dydt = zeros(2,1);
dydt(1) = y(1)+2*y(2);
dydt(2) = 3*y(1)+2*y(2);
```

For information on how to provide additional parameters to the function `odefun`, see "Parameterizing Functions".

Example: `@myFcn`

Data Types: `function_handle`

`tspan` — Interval of integration

vector

Interval of integration, specified as a vector. At minimum, `tspan` must be a two element vector `[t0 tf]` specifying the initial and final times. To obtain solutions at specific times between `t0` and `tf`, use a longer vector of the form `[t0,t1,t2,...,tf]`. The elements in `tspan` must be all increasing or all decreasing.

The solver imposes the initial conditions, `y0`, at `tspan(1)`, then integrates from `tspan(1)` to `tspan(end)`:

- If `tspan` has two elements, `[t0 tf]`, then the solver returns the solution evaluated at each internal integration step within the interval.

- If `tspan` contains more than two elements `[t0,t1,t2,...,tf]`, then the solver returns the solution evaluated at the given points. This does *not* affect the internal steps that the solver uses to traverse from `tspan(1)` to `tspan(end)`. Thus, the solver does not necessarily step precisely to each point specified in `tspan`. However, the solutions produced at the specified points are of the same order of accuracy as the solutions computed at each internal step.

  Specifying several intermediate points has little effect on the efficiency of computation, but for large systems it can affect memory management.

The solution obtained by the solver might be different depending on whether you specify `tspan` as a two-element vector or as a vector with intermediate points. If `tspan` contains several intermediate points, then they give an indication of the scale for the problem, which can affect the size of the initial step taken by the solver.

Example: `[1 10]`

Example: `[1 3 5 7 9 10]`

Data Types: `single` | `double`

`y0` — Initial conditions

vector

Initial conditions, specified as a vector. `y0` must be the same length as the vector output of `odefun`, so that `y0` contains an initial condition for each equation defined in `odefun`.

Data Types: `single` | `double`

`options` — Option structure

structure array

Option structure, specified as a structure array. Use the `odeset` function to create or modify the options structure. See "Summary of ODE Options" for a list of the options compatible with each solver.

Example: `options = odeset('RelTol',1e-5,'Stats','on','OutputFcn',@odeplot)` specifies a relative error tolerance of `1e-5`, turns on the display of solver statistics, and specifies the output function `@odeplot` to plot the solution as it is computed.

Data Types: `struct`

Output Arguments

`t` — Evaluation points
column vector

Evaluation points, returned as a column vector.

- If `tspan` contains two elements, `[t0 tf]`, then `t` contains the internal evaluation points used to perform the integration.
- If `tspan` contains more than two elements, then `t` is the same as `tspan`.

`y` — Solutions
array

Solutions, returned as an array. Each row in `y` corresponds to the solution at the value returned in the corresponding row of `t`.

`te` — Time of events
column vector

Time of events, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ye` — Solution at time of events
array

Solution at time of events, returned as an array. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ie` — Index of vanishing event function
column vector

Index of vanishing event function, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`sol` — Structure for evaluation
structure array

Structure for evaluation, returned as a structure array. Use this structure with the `deval` function to evaluate the solution at any point in the interval `[t0 tf]`. The `sol` structure array always includes these fields:

Structure Field	Description
`sol.x`	Row vector of the steps chosen by the solver.
`sol.y`	Solutions. Each column `sol.y(:,i)` contains the solution at time `sol.x(i)`.
`sol.solver`	Solver name.

Additionally, if you specify the `Events` option and events are detected, then `sol` also includes these fields:

Structure Field	Description
`sol.xe`	Points when events occurred. `sol.xe(end)` contains the exact point of a terminal event, if any.
`sol.ye`	Solutions that correspond to events in `sol.xe`.
`sol.ie`	Indices into the vector returned by the function specified in the `Events` option. The values indicate which event the solver detected.

Algorithms

`ode23t` is an implementation of the trapezoidal rule using a "free" interpolant. This solver is preferred over `ode15s` if the problem is only moderately stiff and you need a solution without numerical damping. `ode23t` also can solve differential algebraic equations (DAEs) [1], [2].

References

[1] Shampine, L. F., M. W. Reichelt, and J.A. Kierzenka, "Solving Index-1 DAEs in MATLAB and Simulink", *SIAM Review*, Vol. 41, 1999, pp. 538–552.

[2] Shampine, L. F. and M. E. Hosea, "Analysis and Implementation of TR-BDF2," *Applied Numerical Mathematics 20*, 1996.

See Also

See Also

`deval` | `ode15s` | `odeget` | `odeset`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"
"Solve Stiff ODEs"
"Solve Differential Algebraic Equations (DAEs)"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

ode23tb

Solve stiff differential equations — trapezoidal rule + backward differentiation formula

Syntax

```
[t,y] = ode23tb(odefun,tspan,y0)
[t,y] = ode23tb(odefun,tspan,y0,options)
[t,y,te,ye,ie] = ode23tb(odefun,tspan,y0,options)
sol = ode23tb(___)
```

Description

`[t,y] = ode23tb(odefun,tspan,y0)`, where `tspan = [t0 tf]`, integrates the system of differential equations $y' = f(t, y)$ from `t0` to `tf` with initial conditions `y0`. Each row in the solution array `y` corresponds to a value returned in column vector `t`.

All MATLAB ODE solvers can solve systems of equations of the form $y' = f(t, y)$, or problems that involve a mass matrix, $M(t, y)y' = f(t, y)$. The solvers all use similar syntaxes. The `ode23s` solver only can solve problems with a mass matrix if the mass matrix is constant. `ode15s` and `ode23t` can solve problems with a mass matrix that is singular, known as differential-algebraic equations (DAEs). Specify the mass matrix using the `Mass` option of `odeset`.

`[t,y] = ode23tb(odefun,tspan,y0,options)` also uses the integration settings defined by `options`, which is an argument created using the `odeset` function. For example, use the `AbsTol` and `RelTol` options to specify absolute and relative error tolerances, or the `Mass` option to provide a mass matrix.

`[t,y,te,ye,ie] = ode23tb(odefun,tspan,y0,options)` additionally finds where functions of (t,y), called event functions, are zero. In the output, `te` is the time of the event, `ye` is the solution at the time of the event, and `ie` is the index of the triggered event.

For each event function, specify whether the integration is to terminate at a zero and whether the direction of the zero crossing matters. Do this by setting the `'Events'`

property to a function, such as `myEventFcn` or `@myEventFcn`, and creating a corresponding function: [`value`,`isterminal`,`direction`] = `myEventFcn`(`t`,`y`). For more information, see "ODE Event Location".

`sol = ode23tb( ___ )` returns a structure that you can use with `deval` to evaluate the solution at any point on the interval `[t0 tf]`. You can use any of the input argument combinations in previous syntaxes.

Examples

ODE With Single Solution Component

Simple ODEs that have a single solution component can be specified as an anonymous function in the call to the solver. The anonymous function must accept two inputs `(t,y)` even if one of the inputs is not used.

Solve the ODE

$$y' = -10t.$$

Use a time interval of `[0,2]` and the initial condition `y0 = 1`.

```
tspan = [0 2];
y0 = 1;
[t,y] = ode23tb(@(t,y) -10*t, tspan, y0);
```

Plot the solution.

```
plot(t,y,'-o')
```

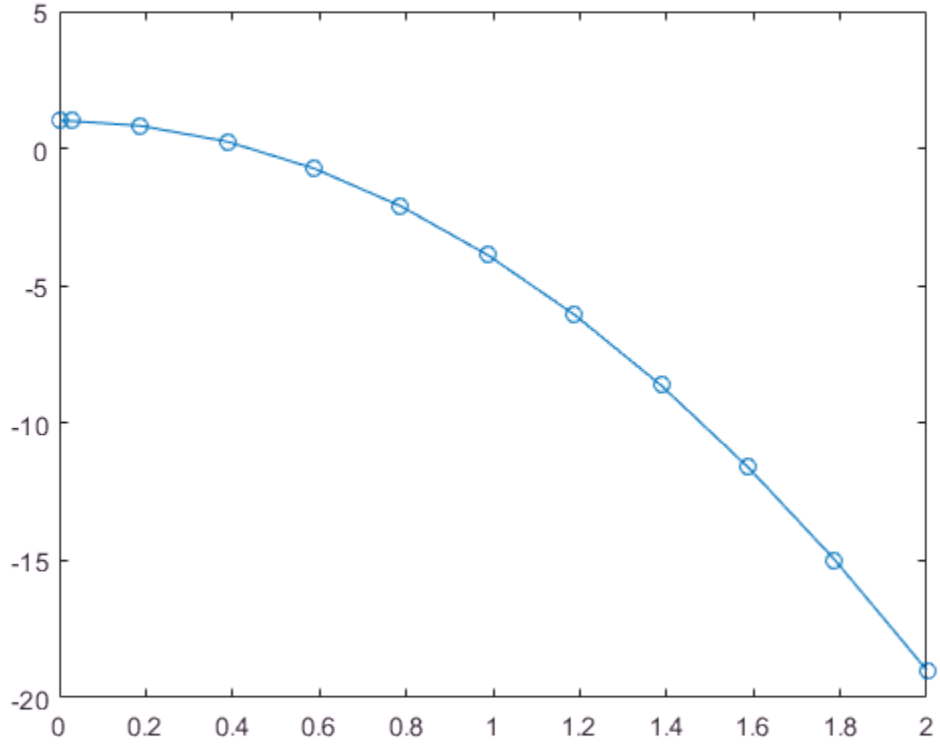

Solve Stiff ODE

An example of a stiff system of equations is the van der Pol equations in relaxation oscillation. The limit cycle has regions where the solution components change slowly and the problem is quite stiff, alternating with regions of very sharp change where it is not stiff.

The system of equations is:

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= 1000(1 - y_1^2)y_2 - y_1 \end{aligned}$$

The initial conditions are $y_1(0) = 2$ and $y_2(0) = 0$. The function `vdp1000` ships with MATLAB® and encodes the equations.

```
function dydt = vdp1000(t,y)
%VDP1000  Evaluate the van der Pol ODEs for mu = 1000.
%
%   See also ODE15S, ODE23S, ODE23T, ODE23TB.

%   Jacek Kierzenka and Lawrence F. Shampine
%   Copyright 1984-2014 The MathWorks, Inc.

dydt = [y(2); 1000*(1-y(1)^2)*y(2)-y(1)];
```

Solving this system using `ode45` with the default relative and absolute error tolerances (`1e-3` and `1e-6`, respectively) is extremely slow, requiring several minutes to solve and plot the solution. `ode45` requires millions of time steps to complete the integration, due to the areas of stiffness where it struggles to meet the tolerances.

This is a plot of the solution obtained by `ode45`, which takes a long time to compute. Notice the enormous number of time steps required to pass through areas of stiffness.

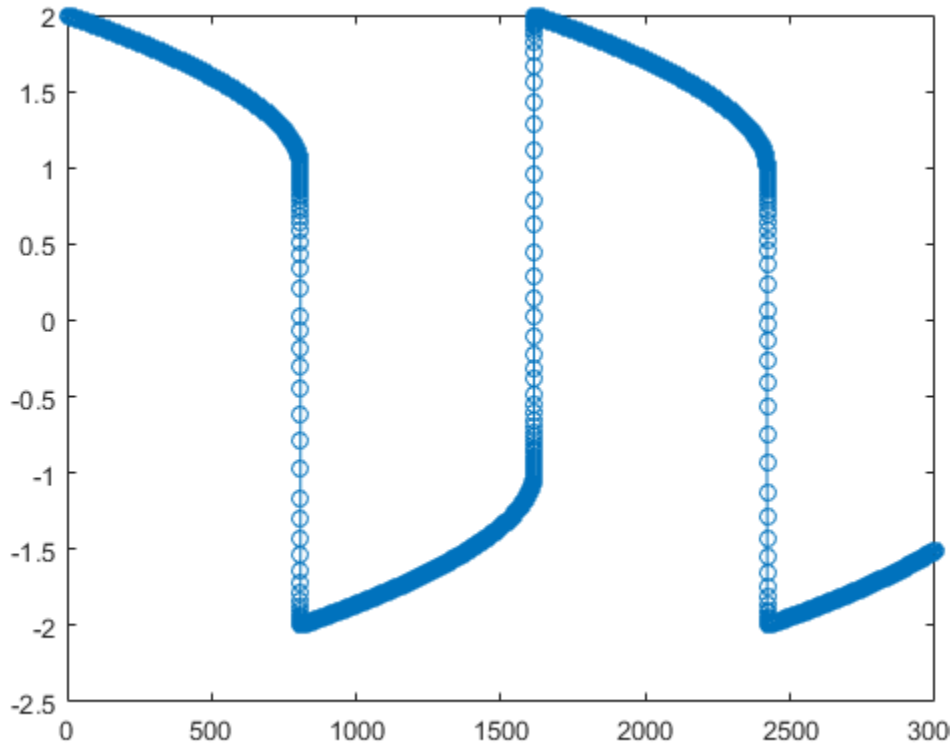

Solve the stiff system using the `ode23tb` solver, and then plot the first column of the solution `y` against the time points `t`. The `ode23tb` solver passes through stiff areas with far fewer steps than `ode45`.

```
[t,y] = ode23tb(@vdp1000,[0 3000],[2 0]);
plot(t,y(:,1),'-o')
```

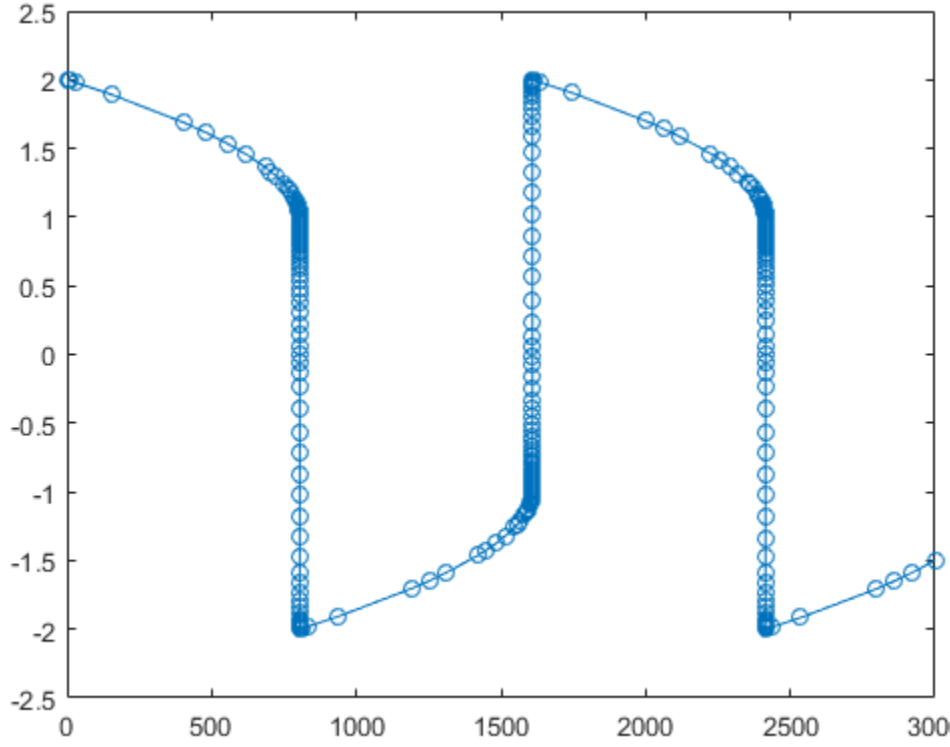

Pass Extra Parameters to ODE Function

`ode23s` only works with functions that use two input arguments, `t` and `y`. However, you can pass in extra parameters by defining them outside the function and passing them in when you specify the function handle.

Solve the ODE

$$y'' = \frac{A}{B} t y.$$

Rewriting the equation as a first-order system yields

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= \frac{A}{B} t y_1. \end{aligned}$$

`odefcn.m` represents this system of equations as a function that accepts four input arguments: `t`, `y`, `A`, and `B`.

```
function dydt = odefcn(t,y,A,B)
dydt = zeros(2,1);
dydt(1) = y(2);
dydt(2) = (A/B)*t.*y(1);
```

Solve the ODE using `ode23tb`. Specify the function handle such that it passes in the predefined values for `A` and `B` to `odefcn`.

```
A = 1;
B = 2;
tspan = [0 5];
y0 = [0 0.01];
[t,y] = ode23tb(@(t,y) odefcn(t,y,A,B), tspan, y0);
```

Plot the results.

```
plot(t,y(:,1),'-o',t,y(:,2),'-.')
```

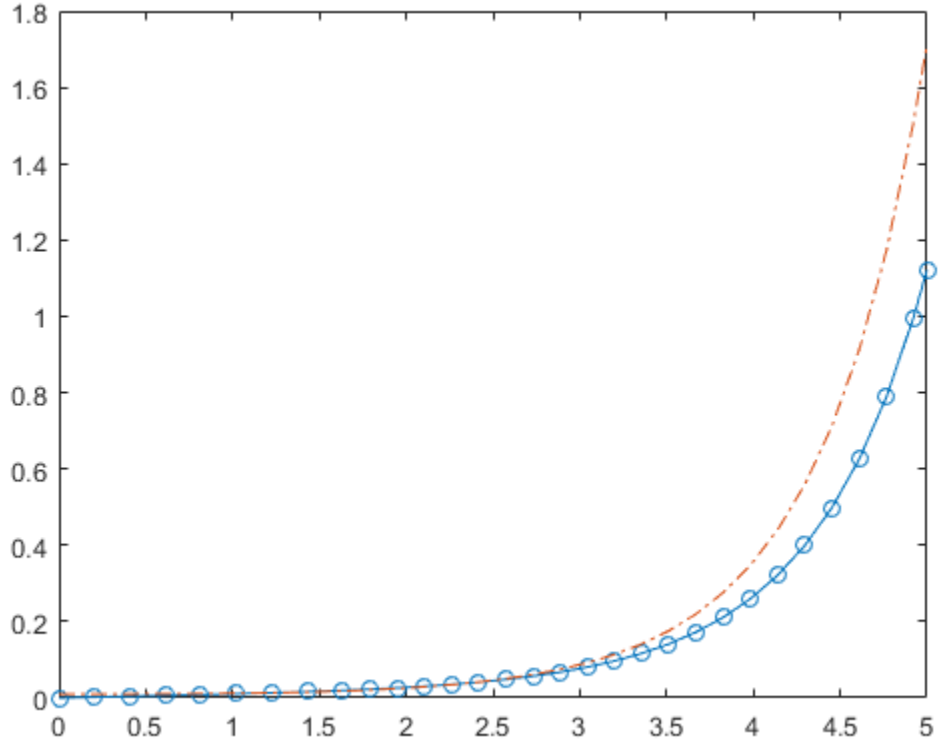

Compare Stiff ODE Solvers

The `ode15s` solver is a good first choice for most stiff problems. However, the other stiff solvers might be more efficient for certain types of problems. This example solves a stiff test equation using all four stiff ODE solvers.

Consider the test equation

$$y' = -\lambda y.$$

The equation becomes increasingly stiff as the magnitude of λ increases. Use $\lambda = 1 \times 10^9$ and the initial condition $y(0) = 1$ over the time interval `[0 0.5]`. With

these values, the problem is stiff enough that `ode45` and `ode23` struggle to integrate the equation. Also, use `odeset` to pass in the constant Jacobian $J = \frac{\partial f}{\partial y} = -\lambda$ and turn on the display of solver statistics.

```
lambda = 1e9;
opts = odeset('Stats','on','Jacobian',-lambda);
tspan = [0 0.5];
y0 = 1;
subplot(2,2,1)
disp('ode15s stats:')
```

```
ode15s stats:
```

```
tic, ode15s(@(t,y) -lambda*y, tspan, y0, opts), toc
```

```
104 successful steps
1 failed attempts
212 function evaluations
0 partial derivatives
21 LU decompositions
210 solutions of linear systems
Elapsed time is 0.760013 seconds.
```

```
title('ode15s')

subplot(2,2,2)
disp(' ')



disp('ode23s stats:')
```

```
ode23s stats:
```

```
tic, ode23s(@(t,y) -lambda*y, tspan, y0, opts), toc
```

```
63 successful steps
0 failed attempts
191 function evaluations
0 partial derivatives
63 LU decompositions
189 solutions of linear systems
Elapsed time is 0.244000 seconds.
```

```
title('ode23s')

subplot(2,2,3)
disp(' ')



disp('ode23t stats:')

ode23t stats:

tic, ode23t(@(t,y) -lambda*y, tspan, y0, opts), toc

95 successful steps
0 failed attempts
125 function evaluations
0 partial derivatives
28 LU decompositions
123 solutions of linear systems
Elapsed time is 0.356294 seconds.

title('ode23t')

subplot(2,2,4)
disp(' ')



disp('ode23tb stats:')

ode23tb stats:

tic, ode23tb(@(t,y) -lambda*y, tspan, y0, opts), toc

71 successful steps
0 failed attempts
167 function evaluations
0 partial derivatives
23 LU decompositions
236 solutions of linear systems
Elapsed time is 0.307926 seconds.

title('ode23tb')
```

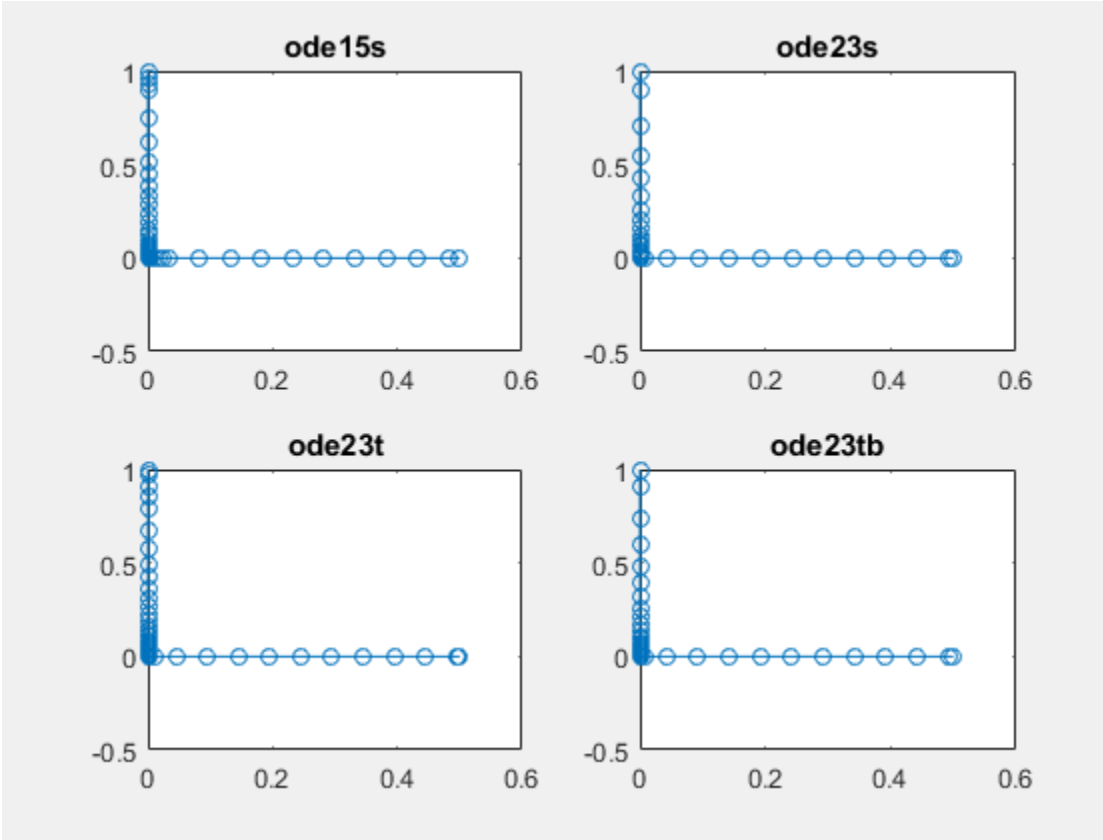

The stiff solvers all perform well, but `ode23s` completes the integration with the fewest steps and runs the fastest for this particular problem. Since the constant Jacobian is specified, none of the solvers need to calculate partial derivatives to compute the solution. Specifying the Jacobian benefits `ode23s` the most since it normally evaluates the Jacobian in every step.

For general stiff problems, the performance of the stiff solvers varies depending on the format of the problem and specified options. Providing the Jacobian matrix or sparsity pattern always improves solver efficiency for stiff problems. But since the stiff solvers use the Jacobian differently, the improvement can vary significantly. Practically speaking, if a system of equations is very large or needs to be solved many times, then it is worthwhile to investigate the performance of the different solvers to minimize execution time.

Input Arguments

odefun — Functions to solve
function handle

Functions to solve, specified as a function handle which defines the functions to be integrated.

The function `dydt = odefun(t,y)`, for a scalar `t` and a column vector `y`, must return a column vector `dydt` of data type `single` or `double` that corresponds to $f(t,y)$. `odefun` must accept both input arguments, `t` and `y`, even if one of the arguments is not used in the function.

For example, to solve $y' = 5y - 3$, use the function:

```
function dydt = odefun(t,y)
dydt = 5*y-3;
```

For a system of equations, the output of `odefun` is a vector. Each element in the vector is the solution to one equation. For example, to solve

$$y'_1 = y_1 + 2y_2$$
$$y'_2 = 3y_1 + 2y_2$$

use the function:

```
function dydt = odefun(t,y)
dydt = zeros(2,1);
dydt(1) = y(1)+2*y(2);
dydt(2) = 3*y(1)+2*y(2);
```

For information on how to provide additional parameters to the function `odefun`, see "Parameterizing Functions".

Example: `@myFcn`

Data Types: `function_handle`

`tspan` — Interval of integration

vector

Interval of integration, specified as a vector. At minimum, `tspan` must be a two element vector `[t0 tf]` specifying the initial and final times. To obtain solutions at specific times between `t0` and `tf`, use a longer vector of the form `[t0,t1,t2,...,tf]`. The elements in `tspan` must be all increasing or all decreasing.

The solver imposes the initial conditions, `y0`, at `tspan(1)`, then integrates from `tspan(1)` to `tspan(end)`:

- If `tspan` has two elements, `[t0 tf]`, then the solver returns the solution evaluated at each internal integration step within the interval.
- If `tspan` contains more than two elements `[t0,t1,t2,...,tf]`, then the solver returns the solution evaluated at the given points. This does *not* affect the internal steps that the solver uses to traverse from `tspan(1)` to `tspan(end)`. Thus, the solver does not necessarily step precisely to each point specified in `tspan`. However, the solutions produced at the specified points are of the same order of accuracy as the solutions computed at each internal step.

  Specifying several intermediate points has little effect on the efficiency of computation, but for large systems it can affect memory management.

The solution obtained by the solver might be different depending on whether you specify `tspan` as a two-element vector or as a vector with intermediate points. If `tspan` contains several intermediate points, then they give an indication of the scale for the problem, which can affect the size of the initial step taken by the solver.

Example: `[1 10]`

Example: `[1 3 5 7 9 10]`

Data Types: `single` | `double`

`y0` — Initial conditions

vector

Initial conditions, specified as a vector. `y0` must be the same length as the vector output of `odefun`, so that `y0` contains an initial condition for each equation defined in `odefun`.

Data Types: `single` | `double`

`options` — Option structure

structure array

Option structure, specified as a structure array. Use the `odeset` function to create or modify the options structure. See "Summary of ODE Options" for a list of the options compatible with each solver.

Example: `options = odeset('RelTol',1e-5,'Stats','on','OutputFcn',@odeplot)` specifies a relative error tolerance of `1e-5`, turns on the display of solver statistics, and specifies the output function `@odeplot` to plot the solution as it is computed.

Data Types: `struct`

Output Arguments

`t` — Evaluation points

column vector

Evaluation points, returned as a column vector.

- If `tspan` contains two elements, `[t0 tf]`, then `t` contains the internal evaluation points used to perform the integration.
- If `tspan` contains more than two elements, then `t` is the same as `tspan`.

`y` — Solutions

array

Solutions, returned as an array. Each row in `y` corresponds to the solution at the value returned in the corresponding row of `t`.

`te` — Time of events

column vector

Time of events, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ye` — Solution at time of events

array

Solution at time of events, returned as an array. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ie` — Index of vanishing event function

column vector

Index of vanishing event function, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`sol` — Structure for evaluation
structure array

Structure for evaluation, returned as a structure array. Use this structure with the `deval` function to evaluate the solution at any point in the interval `[t0 tf]`. The `sol` structure array always includes these fields:

Structure Field	Description
`sol.x`	Row vector of the steps chosen by the solver.
`sol.y`	Solutions. Each column `sol.y(:,i)` contains the solution at time `sol.x(i)`.
`sol.solver`	Solver name.

Additionally, if you specify the `Events` option and events are detected, then `sol` also includes these fields:

Structure Field	Description
`sol.xe`	Points when events occurred. `sol.xe(end)` contains the exact point of a terminal event, if any.
`sol.ye`	Solutions that correspond to events in `sol.xe`.
`sol.ie`	Indices into the vector returned by the function specified in the `Events` option. The values indicate which event the solver detected.

Algorithms

`ode23tb` is an implementation of TR-BDF2, an implicit Runge-Kutta formula with a trapezoidal rule step as its first stage and a backward differentiation formula of order two as its second stage. By construction, the same iteration matrix is used in evaluating

both stages. Like `ode23s` and `ode23t`, this solver may be more efficient than `ode15s` for problems with crude tolerances [1], [2].

References

[1] Bank, R. E., W. C. Coughran, Jr., W. Fichtner, E. Grosse, D. Rose, and R.Smith, "Transient Simulation of Silicon Devices and Circuits," *IEEE Trans. CAD*, 4 (1985), pp. 436–451.

[2] Shampine, L. F. and M. E. Hosea, "Analysis and Implementation of TR-BDF2," *Applied Numerical Mathematics 20*, 1996.

See Also

See Also

`deval` | `ode15s` | `odeget` | `odeset`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"
"Solve Stiff ODEs"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

ode45

Solve nonstiff differential equations — medium order method

Syntax

```
[t,y] = ode45(odefun,tspan,y0)
[t,y] = ode45(odefun,tspan,y0,options)
[t,y,te,ye,ie] = ode45(odefun,tspan,y0,options)
sol = ode45( ___ )
```

Description

`[t,y] = ode45(odefun,tspan,y0)`, where `tspan = [t0 tf]`, integrates the system of differential equations $y' = f(t,y)$ from `t0` to `tf` with initial conditions `y0`. Each row in the solution array `y` corresponds to a value returned in column vector `t`.

All MATLAB ODE solvers can solve systems of equations of the form $y' = f(t,y)$, or problems that involve a mass matrix, $M(t,y)y' = f(t,y)$. The solvers all use similar syntaxes. The `ode23s` solver only can solve problems with a mass matrix if the mass matrix is constant. `ode15s` and `ode23t` can solve problems with a mass matrix that is singular, known as differential-algebraic equations (DAEs). Specify the mass matrix using the `Mass` option of `odeset`.

`ode45` is a versatile ODE solver and is the first solver you should try for most problems. However, if the problem is stiff or requires high accuracy, then there are other ODE solvers that might be better suited to the problem. See “Choose an ODE Solver” for more information.

`[t,y] = ode45(odefun,tspan,y0,options)` also uses the integration settings defined by `options`, which is an argument created using the `odeset` function. For example, use the `AbsTol` and `RelTol` options to specify absolute and relative error tolerances, or the `Mass` option to provide a mass matrix.

`[t,y,te,ye,ie] = ode45(odefun,tspan,y0,options)` additionally finds where functions of (t,y), called event functions, are zero. In the output, `te` is the time of the

event, `ye` is the solution at the time of the event, and `ie` is the index of the triggered event.

For each event function, specify whether the integration is to terminate at a zero and whether the direction of the zero crossing matters. Do this by setting the `'Events'` property to a function, such as `myEventFcn` or `@myEventFcn`, and creating a corresponding function: `[value,isterminal,direction] = myEventFcn(t,y)`. For more information, see "ODE Event Location".

`sol = ode45( ___ )` returns a structure that you can use with `deval` to evaluate the solution at any point on the interval `[t0 tf]`. You can use any of the input argument combinations in previous syntaxes.

Examples

ODE with Single Solution Component

Simple ODEs that have a single solution component can be specified as an anonymous function in the call to the solver. The anonymous function must accept two inputs `(t,y)` even if one of the inputs is not used.

Solve the ODE

$$y' = 2t.$$

Use a time interval of `[0,5]` and the initial condition `y0 = 0`.

```
tspan = [0 5];
y0 = 0;
[t,y] = ode45(@(t,y) 2*t, tspan, y0);
```

Plot the solution.

```
plot(t,y,'-o')
```

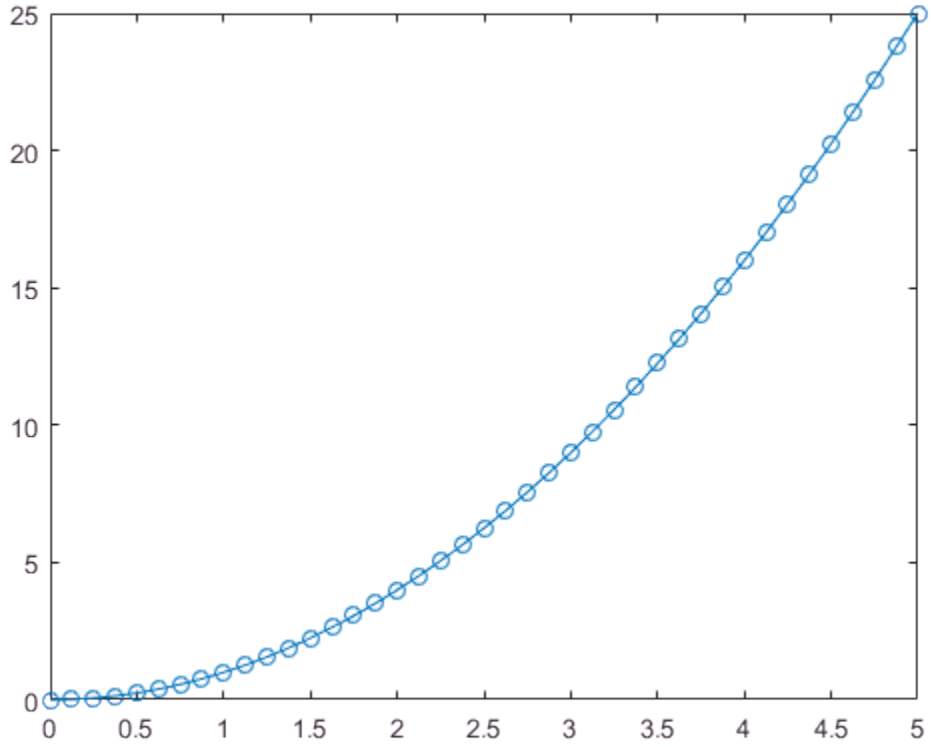

Solve Nonstiff Equation

The van der Pol equation is a second order ODE

$$y_1'' - \mu\left(1 - y_1^2\right) y_1' + y_1 = 0,$$

where $\mu > 0$ is a scalar parameter. Rewrite this equation as a system of first-order ODEs by making the substitution $y_1' = y_2$. The resulting system of first-order ODEs is

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= \mu(1 - y_1^2)y_2 - y_1. \end{aligned}$$

The function file `vdp1.m` represents the van der Pol equation using $\mu = 1$. The variables y_1 and y_2 are the entries `y(1)` and `y(2)` of a two-element vector, `dydt`.

```
function dydt = vdp1(t,y)
%VDP1  Evaluate the van der Pol ODEs for mu = 1
%
%   See also ODE113, ODE23, ODE45.

%   Jacek Kierzenka and Lawrence F. Shampine
%   Copyright 1984-2014 The MathWorks, Inc.

dydt = [y(2); (1-y(1)^2)*y(2)-y(1)];
```

Solve the ODE using the `ode45` function on the time interval `[0 20]` with initial values `[2 0]`. The resulting output is a column vector of time points `t` and a solution array `y`. Each row in `y` corresponds to a time returned in the corresponding row of `t`. The first column of `y` corresponds to y_1, and the second column to y_2.

```
[t,y] = ode45(@vdp1,[0 20],[2; 0]);
```

Plot the solutions for y_1 and y_2 against `t`.

```
plot(t,y(:,1),'-o',t,y(:,2),'-o')
title('Solution of van der Pol Equation (\mu = 1) with ODE45');
xlabel('Time t');
ylabel('Solution y');
legend('y_1','y_2')
```

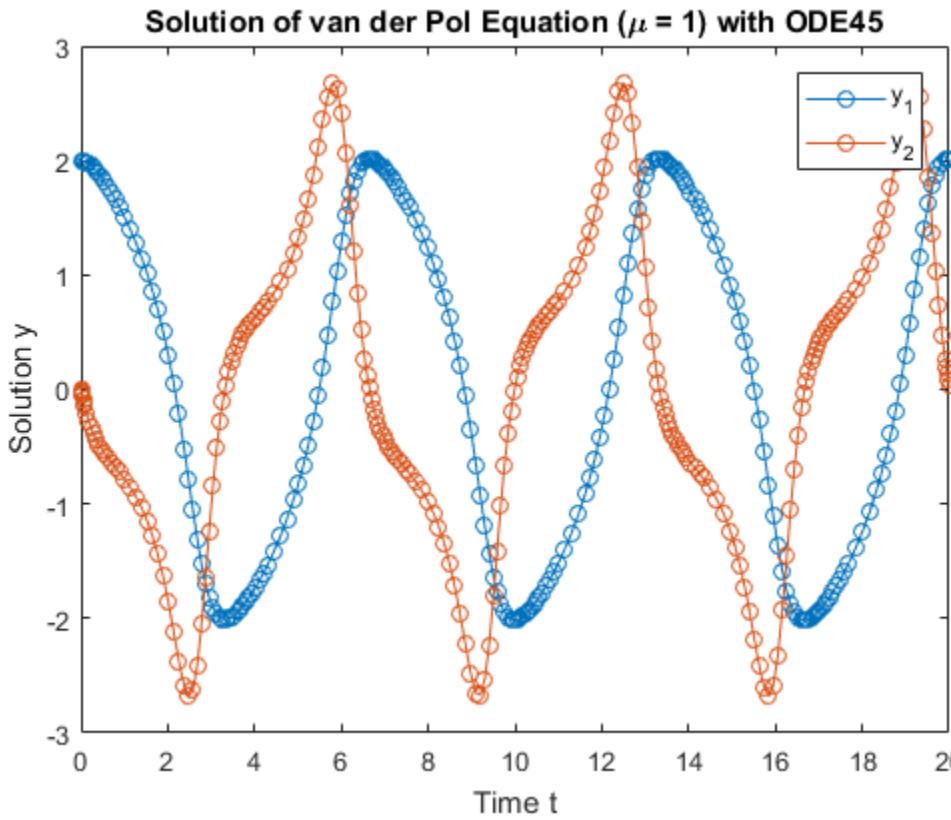

Pass Extra Parameters to ODE Function

`ode45` only works with functions that use two input arguments, `t` and `y`. However, you can pass in extra parameters by defining them outside the function and passing them in when you specify the function handle.

Solve the ODE

$$y'' = \frac{A}{B} t y.$$

Rewriting the equation as a first-order system yields

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= \frac{A}{B} t y_1. \end{aligned}$$

odefcn.m represents this system of equations as a function that accepts four input arguments: t, y, A, and B.

```
function dydt = odefcn(t,y,A,B)
dydt = zeros(2,1);
dydt(1) = y(2);
dydt(2) = (A/B)*t.*y(1);
```

Solve the ODE using ode45. Specify the function handle such that it passes in the predefined values for A and B to odefcn.

```
A = 1;
B = 2;
tspan = [0 5];
y0 = [0 0.01];
[t,y] = ode45(@(t,y) odefcn(t,y,A,B), tspan, y0);
```

Plot the results.

```
plot(t,y(:,1),'-o',t,y(:,2),'-.')
```

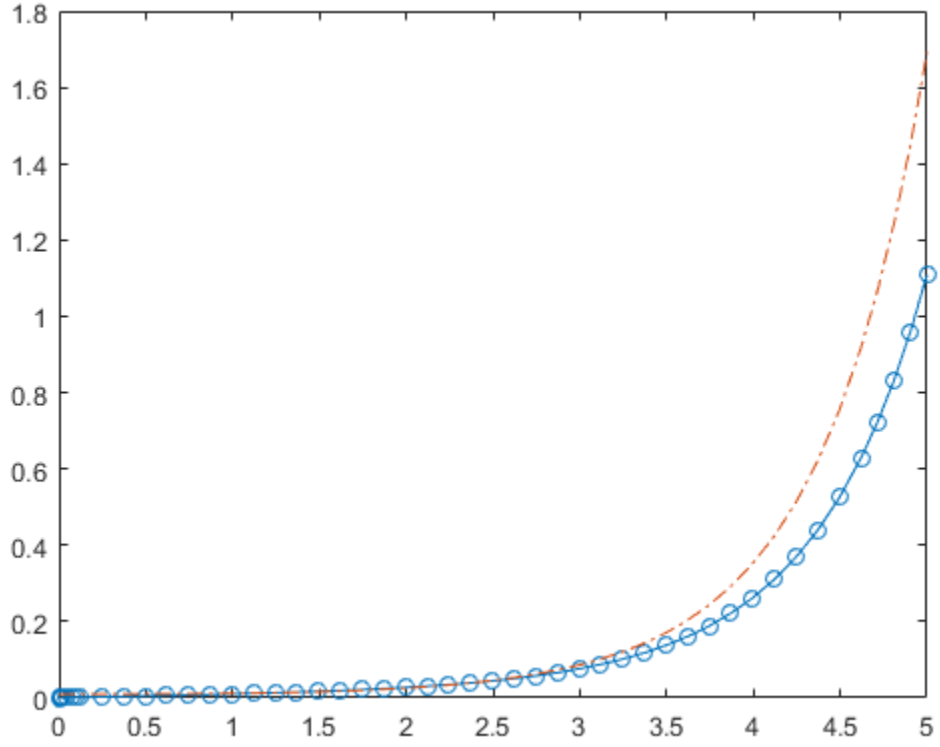

ODE with Time-Dependent Terms

Consider the following ODE with time-dependent parameters

$$y'(t) + f(t)y(t) = g(t).$$

The initial condition is $y_0 = 1$. The function `f(t)` is defined by the n-by-1 vector `f` evaluated at times `ft`. The function `g(t)` is defined by the m-by-1 vector `g` evaluated at times `gt`.

Create the vectors `f` and `g`.

```
ft = linspace(0,5,25);
```

```
f = ft.^2 - ft - 3;

gt = linspace(1,6,25);
g = 3*sin(gt-0.25);
```

Write a function named `myode` that interpolates `f` and `g` to obtain the value of the time-dependent terms at the specified time. Save the function in your current folder to run the rest of the example.

The `myode` function accepts extra input arguments to evaluate the ODE at each time step, but `ode45` only uses the first two input arguments `t` and `y`.

```
function dydt = myode(t,y,ft,f,gt,g)
f = interp1(ft,f,t); % Interpolate the data set (ft,f) at time t
g = interp1(gt,g,t); % Interpolate the data set (gt,g) at time t
dydt = -f.*y + g; % Evaluate ODE at time t
```

Solve the equation over the time interval `[1 5]` using `ode45`. Specify the function using a function handle so that `ode45` uses only the first two input arguments of `myode`. Also, loosen the error thresholds using `odeset`.

```
tspan = [1 5];
ic = 1;
opts = odeset('RelTol',1e-2,'AbsTol',1e-4);
[t,y] = ode45(@(t,y) myode(t,y,ft,f,gt,g), tspan, ic, opts);
```

Plot the solution, `y`, as a function of the time points, `t`.

```
plot(t,y)
```

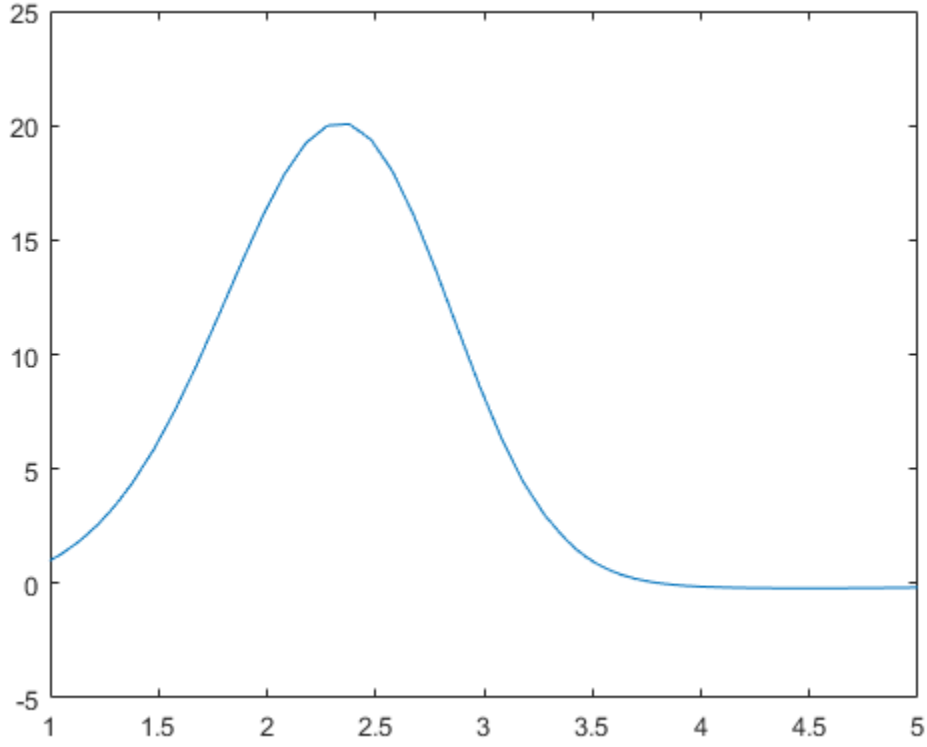

Evaluate and Extend Solution Structure

The van der Pol equation is a second order ODE

$$y_1'' - \mu\left(1 - y_1^2\right)y_1' + y_1 = 0.$$

Solve the van der Pol equation with $\mu = 1$ using `ode45`. The function `vdp1.m` ships with MATLAB® and encodes the equations. Specify a single output to return a structure containing information about the solution, such as the solver and evaluation points.

```
tspan = [0 20];
y0 = [2 0];
```

```
sol = ode45(@vdp1,tspan,y0)
```

```
sol = struct with fields:
     solver: 'ode45'
    extdata: [1×1 struct]
          x: [1×60 double]
          y: [2×60 double]
      stats: [1×1 struct]
      idata: [1×1 struct]
```

Use `linspace` to generate 250 points in the interval `[0 20]`. Evaluate the solution at these points using `deval`.

```
x = linspace(0,20,250);
y = deval(sol,x);
```

Plot the first component of the solution.

```
plot(x,y(1,:))
```

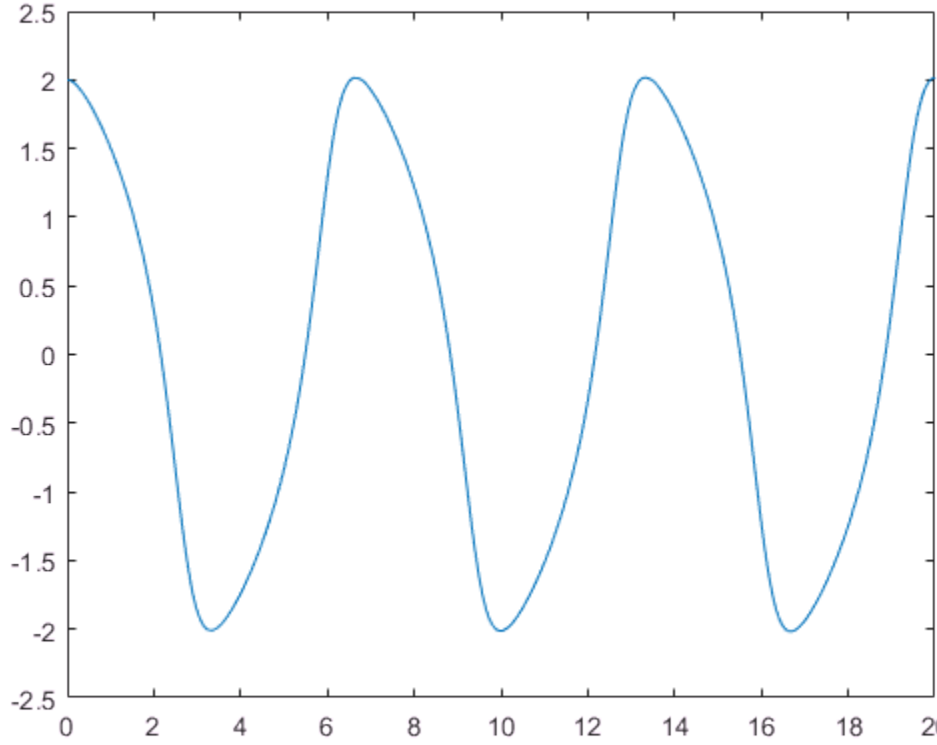

Extend the solution to $t_f = 35$ using `odextend` and add the result to the original plot.

```
sol_new = odextend(sol,@vdp1,35);
x = linspace(20,35,350);
y = deval(sol_new,x);
hold on
plot(x,y(1,:),'r')
```

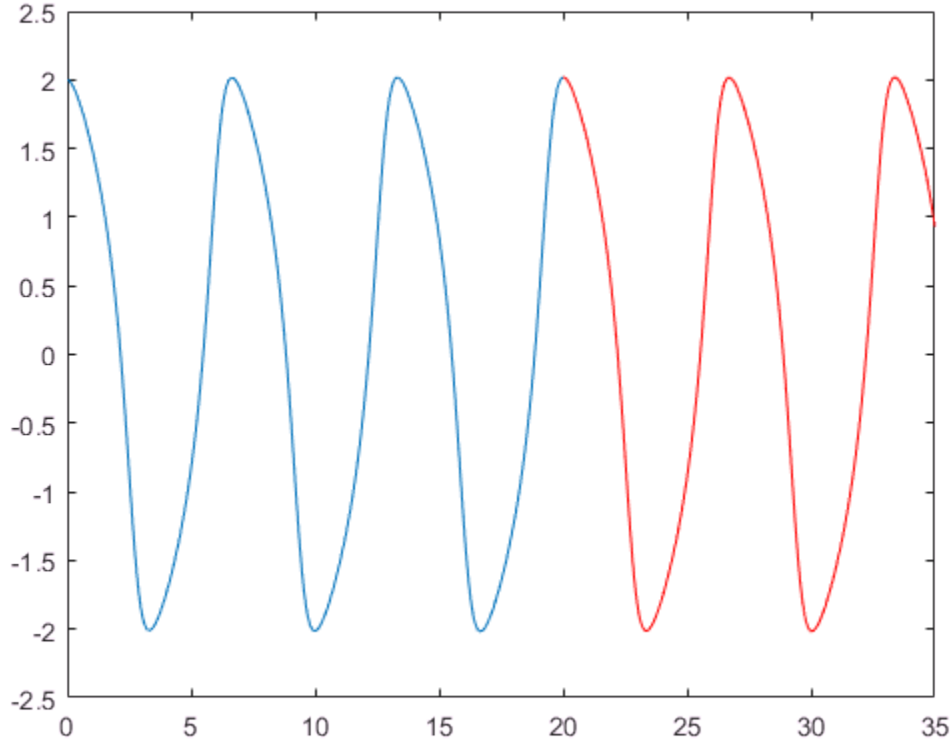

Input Arguments

`odefun` — Functions to solve
function handle

Functions to solve, specified as a function handle which defines the functions to be integrated.

The function `dydt = odefun(t,y)`, for a scalar `t` and a column vector `y`, must return a column vector `dydt` of data type `single` or `double` that corresponds to $f(t,y)$. `odefun`

must accept both input arguments, `t` and `y`, even if one of the arguments is not used in the function.

For example, to solve $y' = 5y - 3$, use the function:

```
function dydt = odefun(t,y)
dydt = 5*y-3;
```

For a system of equations, the output of `odefun` is a vector. Each element in the vector is the solution to one equation. For example, to solve

$$y'_1 = y_1 + 2y_2$$
$$y'_2 = 3y_1 + 2y_2$$

use the function:

```
function dydt = odefun(t,y)
dydt = zeros(2,1);
dydt(1) = y(1)+2*y(2);
dydt(2) = 3*y(1)+2*y(2);
```

For information on how to provide additional parameters to the function `odefun`, see "Parameterizing Functions".

Example: `@myFcn`

Data Types: `function_handle`

`tspan` — Interval of integration

vector

Interval of integration, specified as a vector. At minimum, `tspan` must be a two element vector `[t0 tf]` specifying the initial and final times. To obtain solutions at specific times between `t0` and `tf`, use a longer vector of the form `[t0,t1,t2,...,tf]`. The elements in `tspan` must be all increasing or all decreasing.

The solver imposes the initial conditions, `y0`, at `tspan(1)`, then integrates from `tspan(1)` to `tspan(end)`:

- If `tspan` has two elements, `[t0 tf]`, then the solver returns the solution evaluated at each internal integration step within the interval.

- If `tspan` contains more than two elements `[t0,t1,t2,...,tf]`, then the solver returns the solution evaluated at the given points. This does *not* affect the internal steps that the solver uses to traverse from `tspan(1)` to `tspan(end)`. Thus, the solver does not necessarily step precisely to each point specified in `tspan`. However, the solutions produced at the specified points are of the same order of accuracy as the solutions computed at each internal step.

  Specifying several intermediate points has little effect on the efficiency of computation, but for large systems it can affect memory management.

The solution obtained by the solver might be different depending on whether you specify `tspan` as a two-element vector or as a vector with intermediate points. If `tspan` contains several intermediate points, then they give an indication of the scale for the problem, which can affect the size of the initial step taken by the solver.

Example: `[1 10]`

Example: `[1 3 5 7 9 10]`

Data Types: `single` | `double`

`y0` — Initial conditions

vector

Initial conditions, specified as a vector. `y0` must be the same length as the vector output of `odefun`, so that `y0` contains an initial condition for each equation defined in `odefun`.

Data Types: `single` | `double`

`options` — Option structure

structure array

Option structure, specified as a structure array. Use the `odeset` function to create or modify the options structure. See "Summary of ODE Options" for a list of the options compatible with each solver.

Example: `options = odeset('RelTol',1e-5,'Stats','on','OutputFcn',@odeplot)` specifies a relative error tolerance of `1e-5`, turns on the display of solver statistics, and specifies the output function `@odeplot` to plot the solution as it is computed.

Data Types: `struct`

Output Arguments

`t` — Evaluation points
column vector

Evaluation points, returned as a column vector.

- If `tspan` contains two elements, `[t0 tf]`, then `t` contains the internal evaluation points used to perform the integration.
- If `tspan` contains more than two elements, then `t` is the same as `tspan`.

`y` — Solutions
array

Solutions, returned as an array. Each row in `y` corresponds to the solution at the value returned in the corresponding row of `t`.

`te` — Time of events
column vector

Time of events, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ye` — Solution at time of events
array

Solution at time of events, returned as an array. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ie` — Index of vanishing event function
column vector

Index of vanishing event function, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`sol` — Structure for evaluation
structure array

Structure for evaluation, returned as a structure array. Use this structure with the `deval` function to evaluate the solution at any point in the interval `[t0 tf]`. The `sol` structure array always includes these fields:

Structure Field	Description
`sol.x`	Row vector of the steps chosen by the solver.
`sol.y`	Solutions. Each column `sol.y(:,i)` contains the solution at time `sol.x(i)`.
`sol.solver`	Solver name.

Additionally, if you specify the `Events` option and events are detected, then `sol` also includes these fields:

Structure Field	Description
`sol.xe`	Points when events occurred. `sol.xe(end)` contains the exact point of a terminal event, if any.
`sol.ye`	Solutions that correspond to events in `sol.xe`.
`sol.ie`	Indices into the vector returned by the function specified in the `Events` option. The values indicate which event the solver detected.

Algorithms

`ode45` is based on an explicit Runge-Kutta (4,5) formula, the Dormand-Prince pair. It is a single-step solver – in computing $y(t_n)$, it needs only the solution at the immediately preceding time point, $y(t_{n-1})$ [1], [2].

References

[1] Dormand, J. R. and P. J. Prince, "A family of embedded Runge-Kutta formulae," *J. Comp. Appl. Math.*, Vol. 6, 1980, pp. 19–26.

[2] Shampine, L. F. and M. W. Reichelt, "The MATLAB ODE Suite," *SIAM Journal on Scientific Computing*, Vol. 18, 1997, pp. 1–22.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- All `odeset` option arguments must be constant.
- Code generation does not support a constant mass matrix in the options structure. Provide a mass matrix as a function.
- You must provide at least the two output arguments `T` and `Y`.
- Input types must be homogeneous—all double or all single.
- Variable-sizing support must be enabled. Code generation requires dynamic memory allocation when `tspan` has two elements or you use event functions.

See Also

See Also

`deval` | `ode113` | `ode15s` | `ode23` | `odeget` | `odeset` | `odextend`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"
"Solve Nonstiff ODEs"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

ode113

Solve nonstiff differential equations — variable order method

Syntax

```
[t,y] = ode113(odefun,tspan,y0)
[t,y] = ode113(odefun,tspan,y0,options)
[t,y,te,ye,ie] = ode113(odefun,tspan,y0,options)
sol = ode113( ___ )
```

Description

`[t,y] = ode113(odefun,tspan,y0)`, where `tspan = [t0 tf]`, integrates the system of differential equations $y' = f(t, y)$ from `t0` to `tf` with initial conditions `y0`. Each row in the solution array `y` corresponds to a value returned in column vector `t`.

All MATLAB ODE solvers can solve systems of equations of the form $y' = f(t, y)$, or problems that involve a mass matrix, $M(t, y)y' = f(t, y)$. The solvers all use similar syntaxes. The `ode23s` solver only can solve problems with a mass matrix if the mass matrix is constant. `ode15s` and `ode23t` can solve problems with a mass matrix that is singular, known as differential-algebraic equations (DAEs). Specify the mass matrix using the `Mass` option of `odeset`.

`[t,y] = ode113(odefun,tspan,y0,options)` also uses the integration settings defined by `options`, which is an argument created using the `odeset` function. For example, use the `AbsTol` and `RelTol` options to specify absolute and relative error tolerances, or the `Mass` option to provide a mass matrix.

`[t,y,te,ye,ie] = ode113(odefun,tspan,y0,options)` additionally finds where functions of (*t*,*y*), called event functions, are zero. In the output, `te` is the time of the event, `ye` is the solution at the time of the event, and `ie` is the index of the triggered event.

For each event function, specify whether the integration is to terminate at a zero and whether the direction of the zero crossing matters. Do this by setting the `'Events'`

property to a function, such as `myEventFcn` or `@myEventFcn`, and creating a corresponding function: [`value`,`isterminal`,`direction`] = `myEventFcn`(`t`,`y`). For more information, see "ODE Event Location".

`sol = ode113( ___ )` returns a structure that you can use with `deval` to evaluate the solution at any point on the interval `[t0 tf]`. You can use any of the input argument combinations in previous syntaxes.

Examples

ODE with Single Solution Component

Simple ODEs that have a single solution component can be specified as an anonymous function in the call to the solver. The anonymous function must accept two inputs `(t,y)` even if one of the inputs is not used.

Solve the ODE

$$y' = 2t.$$

Use a time interval of `[0,5]` and the initial condition `y0 = 0`.

```
tspan = [0 5];
y0 = 0;
[t,y] = ode113(@(t,y) 2*t, tspan, y0);
```

Plot the solution.

```
plot(t,y,'-o')
```

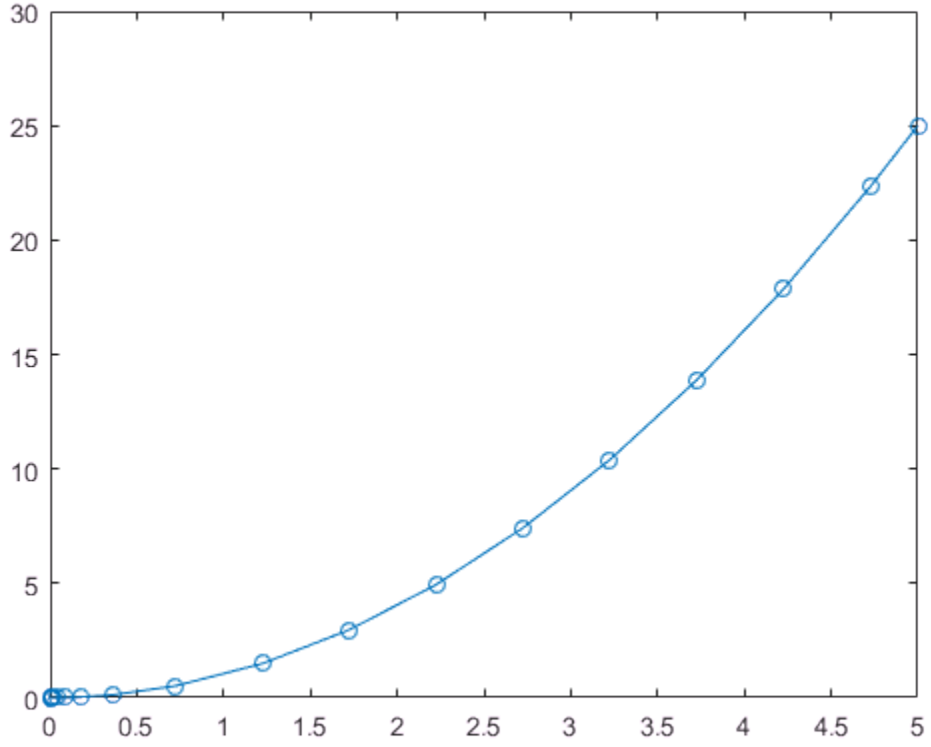

Solve Nonstiff Equation

The van der Pol equation is a second order ODE

$$y_1'' - \mu\left(1 - y_1^2\right) y_1' + y_1 = 0,$$

where $\mu > 0$ is a scalar parameter. Rewrite this equation as a system of first-order ODEs by making the substitution $y_1' = y_2$. The resulting system of first-order ODEs is

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= \mu(1 - y_1^2)y_2 - y_1. \end{aligned}$$

The function file `vdp1.m` represents the van der Pol equation using $\mu = 1$. The variables y_1 and y_2 are the entries `y(1)` and `y(2)` of a two-element vector, `dydt`.

```
function dydt = vdp1(t,y)
%VDP1  Evaluate the van der Pol ODEs for mu = 1
%
%   See also ODE113, ODE23, ODE45.

%   Jacek Kierzenka and Lawrence F. Shampine
%   Copyright 1984-2014 The MathWorks, Inc.

dydt = [y(2); (1-y(1)^2)*y(2)-y(1)];
```

Solve the ODE using the `ode113` function on the time interval `[0 20]` with initial values `[2 0]`. The resulting output is a column vector of time points `t` and a solution array `y`. Each row in `y` corresponds to a time returned in the corresponding row of `t`. The first column of `y` corresponds to y_1, and the second column to y_2.

```
[t,y] = ode113(@vdp1,[0 20],[2; 0]);
```

Plot the solutions for y_1 and y_2 against `t`.

```
plot(t,y(:,1),'-o',t,y(:,2),'-o')
title('Solution of van der Pol Equation (\mu = 1) with ODE113');
xlabel('Time t');
ylabel('Solution y');
legend('y_1','y_2')
```

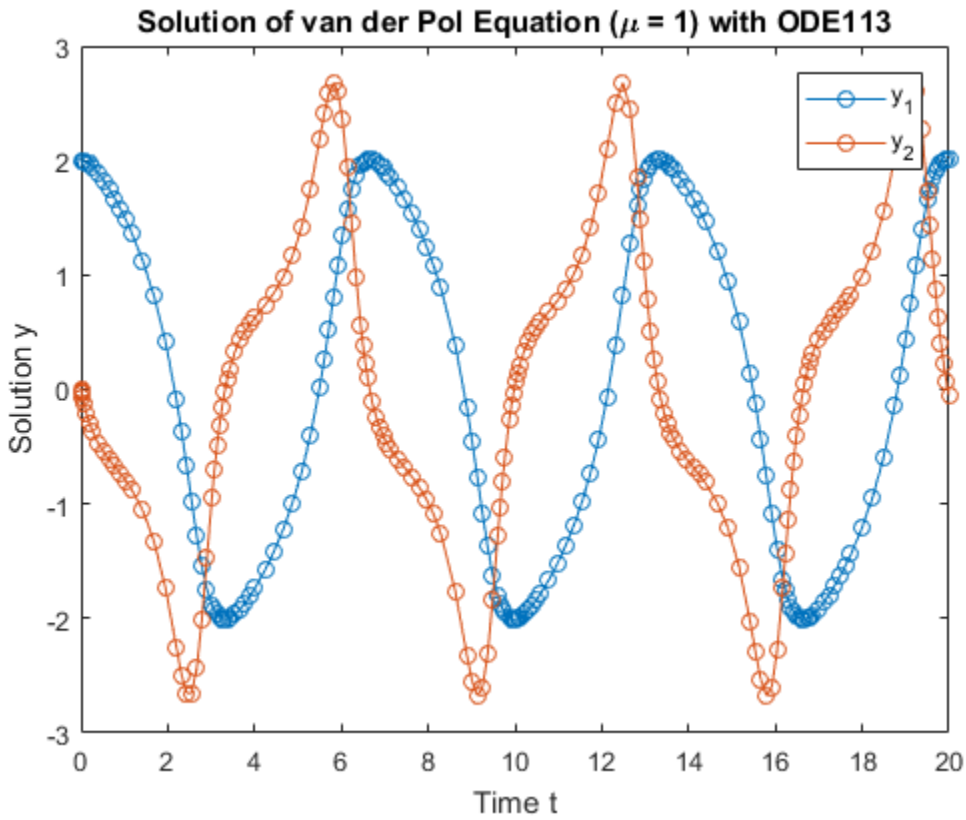

Pass Extra Parameters to ODE Function

`ode113` only works with functions that use two input arguments, `t` and `y`. However, you can pass in extra parameters by defining them outside the function and passing them in when you specify the function handle.

Solve the ODE

$$y'' = \frac{A}{B} t y.$$

Rewriting the equation as a first-order system yields

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= \frac{A}{B} t y_1. \end{aligned}$$

odefcn.m represents this system of equations as a function that accepts four input arguments: t, y, A, and B.

```
function dydt = odefcn(t,y,A,B)
dydt = zeros(2,1);
dydt(1) = y(2);
dydt(2) = (A/B)*t.*y(1);
```

Solve the ODE using ode113. Specify the function handle such that it passes in the predefined values for A and B to odefcn.

```
A = 1;
B = 2;
tspan = [0 5];
y0 = [0 0.01];
[t,y] = ode113(@(t,y) odefcn(t,y,A,B), tspan, y0);
```

Plot the results.

```
plot(t,y(:,1),'-o',t,y(:,2),'-.')
```

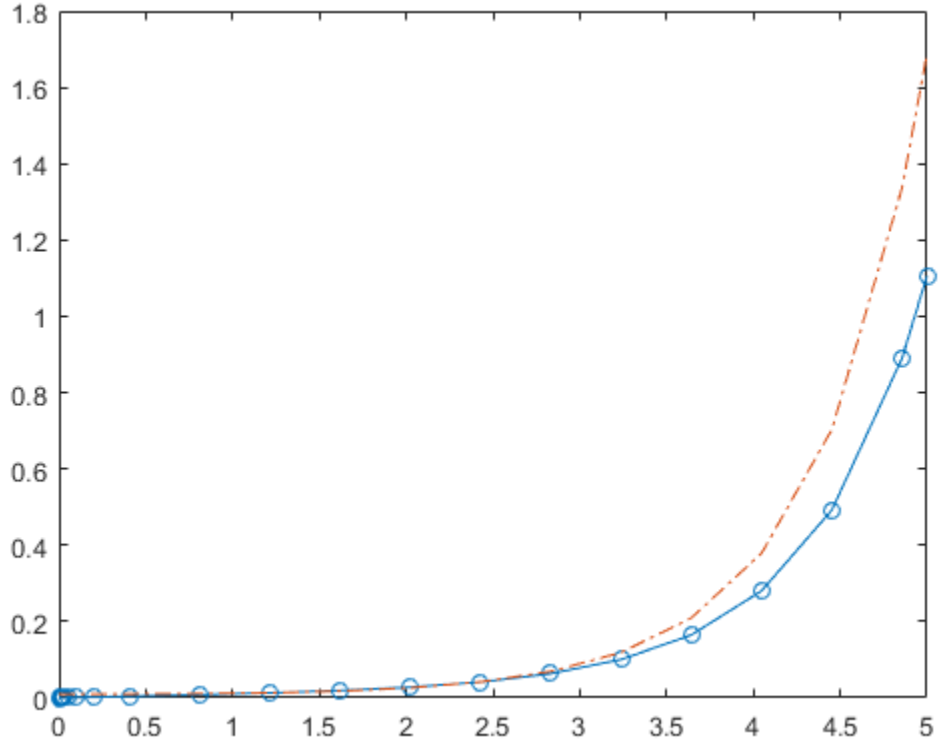

ODE with Stringent Error Threshold

Compared to `ode45`, the `ode113` solver is better at solving problems with stringent error tolerances. A common situation where `ode113` excels is in orbital dynamics problems, where the solution curve is smooth and requires high accuracy.

The two-body problem considers two interacting masses `m1` and `m2` orbiting in a common plane. In this example, one of the masses is significantly larger than the other. With the heavy body at the origin, the equations of motion are

$$\begin{aligned} x'' &= -x/r^3 \\ y'' &= -y/r^3, \end{aligned}$$

where

$$r = \sqrt{x^2 + y^2}.$$

To solve the system, first convert to a system of four first-order ODEs using the substitutions

$$\begin{aligned} y_1 &= x \\ y_2 &= x' \\ y_3 &= y \\ y_4 &= y'. \end{aligned}$$

The substitutions produce the first-order system

$$\begin{aligned} y_1' &= y_2 \\ y_2' &= -y_1/r^3 \\ y_3' &= y_4 \\ y_4' &= -y_3/r^3. \end{aligned}$$

The function `twobodyode` codes the system of equations for the two-body problem.

```
function dy = twobodyode(t,y)
% Two body problem with one mass much larger than the other.
r = sqrt(y(1)^2 + y(3)^2);
dy = [y(2);
    -y(1)/r^3;
    y(4);
    -y(3)/r^3];
```

Save `twobodyode.m` in your working directory, then solve the ODE using `ode113`. Use stringent error tolerances of `1e-13` for `RelTol` and `1e-14` for `AbsTol`.

```
opts = odeset('Reltol',1e-13,'AbsTol',1e-14,'Stats','on');
tspan = [0 10*pi];
y0 = [2 0 0 0.5];

[t,y] = ode113(@twobodyode, tspan, y0, opts);
```

```
plot(t,y)
legend('x','x''','y','y''','Location','SouthEast')
title('Position and Velocity Components')
```

```
924 successful steps
4 failed attempts
1853 function evaluations
```

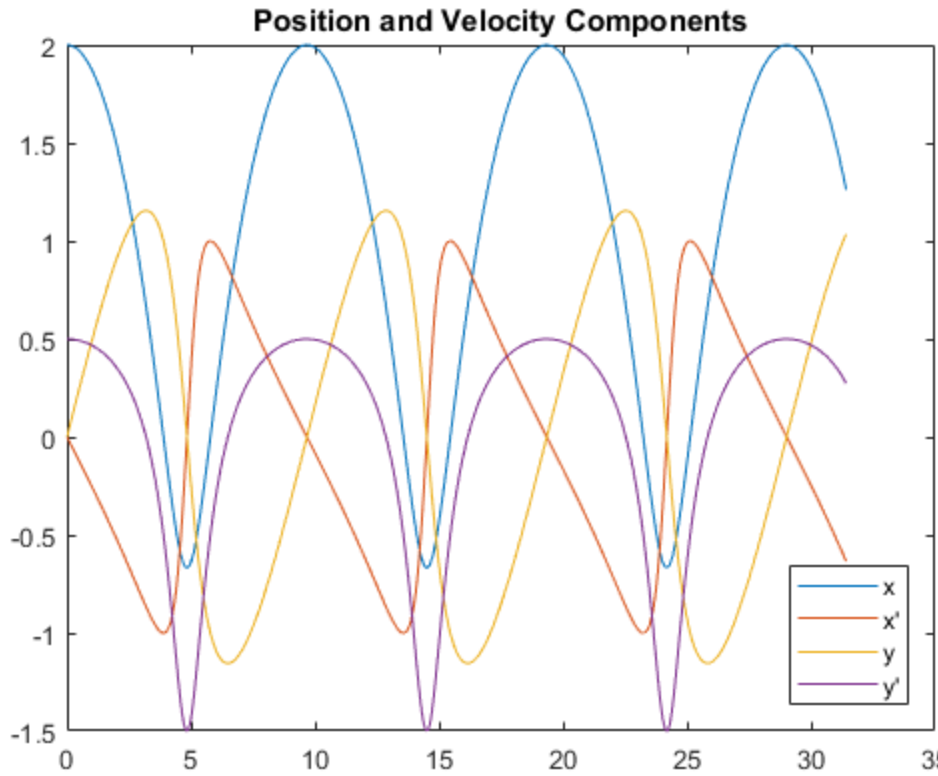


```
figure
plot(y(:,1),y(:,3),'-o',0,0,'ro')
axis equal
title('Orbit of Smaller Mass')
```

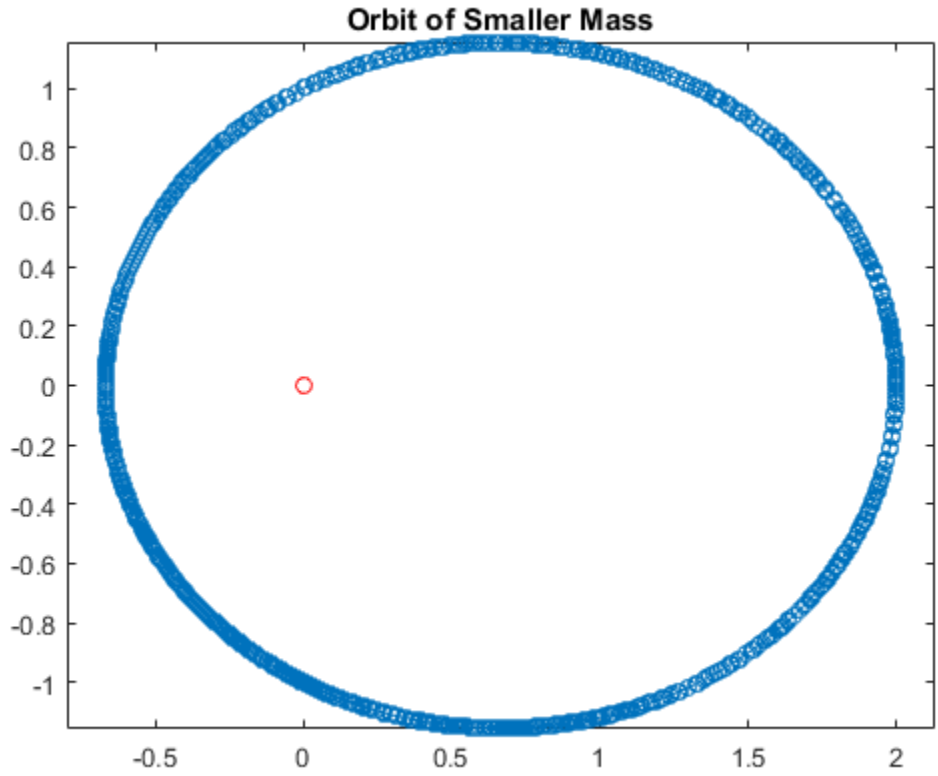

Compared to `ode45`, the `ode113` solver is able to obtain the solution faster and with fewer function evaluations.

Input Arguments

`odefun` — Functions to solve
function handle

Functions to solve, specified as a function handle which defines the functions to be integrated.

The function `dydt = odefun(t,y)`, for a scalar `t` and a column vector `y`, must return a column vector `dydt` of data type `single` or `double` that corresponds to $f(t,y)$. `odefun` must accept both input arguments, `t` and `y`, even if one of the arguments is not used in the function.

For example, to solve $y' = 5y - 3$, use the function:

```
function dydt = odefun(t,y)
dydt = 5*y-3;
```

For a system of equations, the output of `odefun` is a vector. Each element in the vector is the solution to one equation. For example, to solve

$$y'_1 = y_1 + 2y_2$$
$$y'_2 = 3y_1 + 2y_2$$

use the function:

```
function dydt = odefun(t,y)
dydt = zeros(2,1);
dydt(1) = y(1)+2*y(2);
dydt(2) = 3*y(1)+2*y(2);
```

For information on how to provide additional parameters to the function `odefun`, see "Parameterizing Functions".

Example: `@myFcn`

Data Types: `function_handle`

`tspan` — Interval of integration

vector

Interval of integration, specified as a vector. At minimum, `tspan` must be a two element vector `[t0 tf]` specifying the initial and final times. To obtain solutions at specific times between `t0` and `tf`, use a longer vector of the form `[t0,t1,t2,...,tf]`. The elements in `tspan` must be all increasing or all decreasing.

The solver imposes the initial conditions, `y0`, at `tspan(1)`, then integrates from `tspan(1)` to `tspan(end)`:

- If `tspan` has two elements, `[t0 tf]`, then the solver returns the solution evaluated at each internal integration step within the interval.
- If `tspan` contains more than two elements `[t0,t1,t2,...,tf]`, then the solver returns the solution evaluated at the given points. This does *not* affect the internal steps that the solver uses to traverse from `tspan(1)` to `tspan(end)`. Thus, the solver does not necessarily step precisely to each point specified in `tspan`. However, the solutions produced at the specified points are of the same order of accuracy as the solutions computed at each internal step.

  Specifying several intermediate points has little effect on the efficiency of computation, but for large systems it can affect memory management.

The solution obtained by the solver might be different depending on whether you specify `tspan` as a two-element vector or as a vector with intermediate points. If `tspan` contains several intermediate points, then they give an indication of the scale for the problem, which can affect the size of the initial step taken by the solver.

Example: `[1 10]`

Example: `[1 3 5 7 9 10]`

Data Types: `single` | `double`

`y0` — Initial conditions

vector

Initial conditions, specified as a vector. `y0` must be the same length as the vector output of `odefun`, so that `y0` contains an initial condition for each equation defined in `odefun`.

Data Types: `single` | `double`

`options` — Option structure

structure array

Option structure, specified as a structure array. Use the `odeset` function to create or modify the options structure. See "Summary of ODE Options" for a list of the options compatible with each solver.

Example: `options = odeset('RelTol',1e-5,'Stats','on','OutputFcn',@odeplot)` specifies a relative error tolerance of `1e-5`, turns on the display of solver statistics, and specifies the output function `@odeplot` to plot the solution as it is computed.

Data Types: `struct`

Output Arguments

`t` — Evaluation points

column vector

Evaluation points, returned as a column vector.

- If `tspan` contains two elements, `[t0 tf]`, then `t` contains the internal evaluation points used to perform the integration.
- If `tspan` contains more than two elements, then `t` is the same as `tspan`.

`y` — Solutions

array

Solutions, returned as an array. Each row in `y` corresponds to the solution at the value returned in the corresponding row of `t`.

`te` — Time of events

column vector

Time of events, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ye` — Solution at time of events

array

Solution at time of events, returned as an array. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`ie` — Index of vanishing event function

column vector

Index of vanishing event function, returned as a column vector. The event times in `te` correspond to the solutions returned in `ye`, and `ie` specifies which event occurred.

`sol` — Structure for evaluation

structure array

Structure for evaluation, returned as a structure array. Use this structure with the `deval` function to evaluate the solution at any point in the interval `[t0 tf]`. The `sol` structure array always includes these fields:

Structure Field	Description
`sol.x`	Row vector of the steps chosen by the solver.
`sol.y`	Solutions. Each column `sol.y(:,i)` contains the solution at time `sol.x(i)`.
`sol.solver`	Solver name.

Additionally, if you specify the `Events` option and events are detected, then `sol` also includes these fields:

Structure Field	Description
`sol.xe`	Points when events occurred. `sol.xe(end)` contains the exact point of a terminal event, if any.
`sol.ye`	Solutions that correspond to events in `sol.xe`.
`sol.ie`	Indices into the vector returned by the function specified in the `Events` option. The values indicate which event the solver detected.

Algorithms

`ode113` is a variable-step, variable-order (VSVO) Adams-Bashforth-Moulton PECE solver of orders 1 to 12. It may be more efficient than `ode45` at stringent tolerances or if the ODE function is particularly expensive to evaluate. `ode113` is a multistep solver — it normally needs the solutions at several preceding time points to compute the current solution [1], [2].

References

[1] Shampine, L. F. and M. K. Gordon, *Computer Solution of Ordinary Differential Equations: the Initial Value Problem*, W. H. Freeman, SanFrancisco, 1975.

[2] Shampine, L. F. and M. W. Reichelt, “The MATLAB ODE Suite,” *SIAM Journal on Scientific Computing*, Vol. 18, 1997, pp. 1–22.

See Also

See Also

`deval` | `ode45` | `odeget` | `odeset` | `odextend`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"
"Solve Nonstiff ODEs"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

odeget

Extract ODE option values

Syntax

```
v = odeget(options,'Name')
v = odeget(options,'Name',default)
```

Description

`v = odeget(options,'Name')` extracts the value of the named option from `options`, which is a structure containing option values. Use `odeset` to create or update the options structure.

`v = odeget(options,'Name',default)` returns the value `v = default` if the named option does not have a value specified in `options`.

Examples

Extract ODE Option Values

Create an options structure using `odeset` that contains several values for different options.

```
M = @(t) [t 0; 0 -t];
options = odeset('RelTol',1e-4,'AbsTol',1e-5,'OutputFcn',@odephas2,...
    'Mass',M,'MassSingular','no','MStateDependence','none')
```

```
options = struct with fields:
              AbsTol: 1.0000e-05
                 BDF: []
              Events: []
         InitialStep: []
            Jacobian: []
           JConstant: []
            JPattern: []
                Mass: @(t)[t,0;0,-t]
        MassSingular: 'no'
```

```
            MaxOrder: []
             MaxStep: []
         NonNegative: []
         NormControl: []
           OutputFcn: @odephas2
           OutputSel: []
              Refine: []
              RelTol: 1.0000e-04
               Stats: []
          Vectorized: []
    MStateDependence: 'none'
           MvPattern: []
        InitialSlope: []
```

Use `odeget` to extract the value of the `OutputFcn` field from the options structure.

```
v = odeget(options,'OutputFcn')
```

```
v = function_handle with value:
    @odephas2
```

Now extract the value of the `Refine` field. Since this field is not set, `odeget` returns an empty matrix `[]`.

```
v = odeget(options,'Refine')
```

```
v =

     []
```

You can specify a third input to `odeget` to change the default return value. This ensures that `v` is never empty.

```
v = odeget(options,'Refine',1)
```

```
v = 1
```

Input Arguments

`options` — Options structure
structure

Options structure. Use `odeset` to create or modify the options structure.

Example: `options = odeset('RelTol',1e-4,'AbsTol',1e-5)` returns an options structure with values specified for the relative and absolute error tolerances.

Data Types: `struct`

`Name` — Option name
any valid option from `odeset`

Option name, specified as any valid option accepted by `odeset`:

- Error control — `'AbsTol'`, `'RelTol'`, `'NormControl'`
- Output control — `'NonNegative'`, `'OutputFcn'`, `'OutputSel'`, `'Refine'`, `'Stats'`
- Solver steps — `'InitialStep'`, `'MaxStep'`
- Event functions — `'Events'`
- Jacobian matrix — `'Jacobian'`, `'JPattern'`, `'Vectorized'`
- Mass matrix — `'Mass'`, `'MStateDependence'`, `'MvPattern'`, `'MassSingular'`, `'InitialSlope'`
- Algorithm options for `ode15s` and `ode15i` — `'MaxOrder'`, `'BDF'`

Example: `v = odeget(options,'AbsTol')`

`default` — Default return value
any MATLAB object

Default return value, specified as any valid MATLAB object.

Example: `v = odeget(options,'AbsTol',1e-6)` returns `1e-6` if `options` does not have a value set for `AbsTol`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `struct` | `table` | `cell` | `function_handle` | `categorical`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The `name` argument must be constant.

See Also

See Also

`deval` | `odeset` | `odextend`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

odeset

Create or modify options structure for ODE solvers

Syntax

```
options = odeset(Name,Value,...)
options = odeset(oldopts,Name,Value,...)
options = odeset(oldopts,newopts)
odeset
```

Description

`options = odeset(Name,Value,...)` creates an options structure that you can pass as an argument to any of the ODE solvers. In the structure, `options`, the named options have the specified values. Any unspecified options have default values. For example, `options = odeset('RelTol',1e-3)` returns an options structure with `RelTol` set to `1e-3`.

`options = odeset(oldopts,Name,Value,...)` modifies an existing options structure, `oldopts`, using the newly specified name-value pairs. This overwrites any old values of the specified options, and adds values for new options to the structure.

`options = odeset(oldopts,newopts)` modifies an existing options structure, `oldopts`, by combining it with a new options structure, `newopts`. Any new options not equal to `[]` overwrite the corresponding options in `oldopts`.

`odeset` with no input arguments displays all possible option names and their possible values. Default values are indicated with `{}`, where applicable.

Examples

Set and Update ODE Options

Create an options structure that contains values for `RelTol` and `AbsTol`.

```
options = odeset('RelTol',1e-8,'AbsTol',1e-10);
```

Update the value of `AbsTol` in the existing options structure.

```
options = odeset(options,'AbsTol',1e-9)
```

```
options = struct with fields:
              AbsTol: 1.0000e-09
                 BDF: []
              Events: []
         InitialStep: []
            Jacobian: []
           JConstant: []
            JPattern: []
                Mass: []
        MassSingular: []
            MaxOrder: []
             MaxStep: []
         NonNegative: []
         NormControl: []
           OutputFcn: []
           OutputSel: []
              Refine: []
              RelTol: 1.0000e-08
               Stats: []
          Vectorized: []
    MStateDependence: []
            MvPattern: []
        InitialSlope: []
```

Combine Options Structures

Create two options structures.

```
opts_1 = odeset('RelTol',1e-8,'AbsTol',1e-9,'OutputFcn',@odeplot,'Stats','on');
```

```
opts_2 = odeset('Mass',@(t) [t 0; 0 -t],'MStateDependence','none',...
    'MassSingular','no','OutputFcn',@odephas2);
```

Combine the options structures, giving preference to `opts_2`. Since both structures contain different values for `OutputFcn`, the value in `opts_2` overrides the one in `opts_1`.

```
opts = odeset(opts_1,opts_2)
```

```
opts = struct with fields:
              AbsTol: 1.0000e-09
                 BDF: []
```

```
             Events: []
        InitialStep: []
           Jacobian: []
          JConstant: []
           JPattern: []
               Mass: @(t)[t,0;0,-t]
       MassSingular: 'no'
           MaxOrder: []
            MaxStep: []
        NonNegative: []
        NormControl: []
          OutputFcn: @odephas2
          OutputSel: []
             Refine: []
             RelTol: 1.0000e-08
              Stats: 'on'
         Vectorized: []
  MStateDependence: 'none'
          MvPattern: []
       InitialSlope: []
```

Input Arguments

`oldopts` — Old options structure

structure

Old options structure, specified as a structure previously created using `odeset`.

Data Types: `struct`

`newopts` — New options structure

structure

New options structure, specified as a structure previously created using `odeset`.

Data Types: `struct`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `options = odeset('AbsTol',1e-3,'Reltol',1e-2,'Jacobian',@J,'Mass',M)` specifies thresholds for the absolute and relative error tolerances, a function that returns the Jacobian, and a mass matrix.

Error Control

`'RelTol'` — Relative error tolerance

`1e-3` (default) | positive scalar

Relative error tolerance, specified as the comma-separated pair consisting of `'RelTol'` and a positive scalar. This tolerance measures the error relative to the magnitude of each solution component. Roughly speaking, it controls the number of correct digits in all solution components, except those smaller than the absolute tolerance `AbsTol`.

At each step, the ODE solver estimates the local error `e` in the `i`th component of the solution. To be successful, the step must have acceptable error, as determined by both the relative and absolute error tolerances:

```
|e(i)| <= max(RelTol*abs(y(i)),AbsTol(i))
```

Example: `opts = odeset('RelTol',1e-5,'AbsTol',1e-7)`

Data Types: `single` | `double`

`'AbsTol'` — Absolute error tolerance

`1e-6` (default) | positive scalar | vector

Absolute error tolerance, specified as the comma-separated pair consisting of `'AbsTol'` and a positive scalar or vector. This tolerance is a threshold below which the value of the solution becomes unimportant. If the solution `|y|` is smaller than `AbsTol`, then the solver does not need to obtain any correct digits in `|y|`. For this reason, the value of `AbsTol` should take into account the scale of the solution components.

If `AbsTol` is a vector, then it must be the same length as the solution. If `AbsTol` is a scalar, then the value applies to all solution components.

At each step, the ODE solver estimates the local error `e` in the `i`th component of the solution. To be successful, the step must have acceptable error, as determined by both the relative and absolute error tolerances:

```
|e(i)| <= max(RelTol*abs(y(i)),AbsTol(i))
```

Example: `opts = odeset('RelTol',1e-5,'AbsTol',1e-7)`

Data Types: `single` | `double`

`'NormControl'` — Control error relative to norm

`'off'` (default) | `'on'`

Control error relative to the norm of the solution, specified as the comma-separated pair consisting of `'NormControl'` and `'on'` or `'off'`. When `NormControl` is `'on'`, the solvers control the error `e` at each step using the norm of the solution rather than its absolute value:

```
norm(e(i)) <= max(RelTol*norm(y(i)),AbsTol(i))
```

Example: `opts = odeset('NormControl','on')`

Solver Output

`'NonNegative'` — Nonnegative solution components

`[ ]` (default) | scalar | vector

Nonnegative solution components, specified as the comma-separated pair consisting of `'NonNegative'` and a scalar or vector. The scalar or vector selects which solution components must be nonnegative.

Note: `NonNegative` is not available for `ode23s` or `ode15i`. Additionally, for `ode15s`, `ode23t`, and `ode23tb` it is not available for problems where there is a mass matrix.

Example: `opts = odeset('NonNegative',1)` specifies that the first solution component must be nonnegative.

Data Types: `single` | `double`

`'OutputFcn'` — Output function

`[ ]` or `@odeplot` (default) | function handle

Output function, specified as the comma-separated pair consisting of `'OutputFcn'` and a function handle. The ODE solver calls the output function after each successful time

step. If you call an ODE solver with no outputs, then the output function defaults to `@odeplot`, which plots all of the solution components as they are computed. Otherwise, the default is `[]`.

These are the built-in output functions that you can use with `OutputFcn`:

Function Name	Description
`odeplot`	Plot all components of the solution vs. time
`odephas2`	2-D phase plane plot of the first two solution components
`odephas3`	3-D phase plane plot of the first three solution components
`odeprint`	Print solution and time step

If you write a custom output function, then it must be of the form

```
status = myOutputFcn(t,y,flag)
```

The output function must respond appropriately to these flags:

Flag	Description
`'init'`	The solver calls `myOutputFcn(tspan,y0,'init')` before beginning the integration to allow the output function to initialize. `tspan` and `y0` are the input arguments to the ODE solver.
`[]`	The solver calls `status = myOutputFcn(t,y,[])` after each integration step for which output is requested. `t` contains points where output was generated during the step, and `y` is the numerical solution at the points in `t`. If `t` is a vector, then the `i`th column of `y` corresponds to the `i`th element of `t`. • If `length(tspan) > 2`, then the output is produced at every point in `tspan`.

Flag	Description
	• If `length(tspan) = 2`, then the output is produced according to the `Refine` option. `myOutputFcn` must return a status of `0` or `1`. If `status = 1`, then the solver halts integration. You can use this mechanism, for instance, to implement a **Stop** button.
`'done'`	The solver calls `myOutputFcn([], [],'done')` once integration is complete to allow the output function to perform cleanup tasks.

Data Types: `function_handle`

`'OutputSel'` — Component selection for output function

vector of indices

Component selection for output function, specified as the comma-separated pair consisting of `'OutputSel'` and a vector of indices. The vector specifies which components of the solution to pass to the output function.

Example: `opts = odeset('OutputFcn',@myFcn,'OutputSel',[1 3])` passes the first and third components of the solution to the output function.

`'Refine'` — Solution refinement factor

`1` (most solvers) or `4` (`ode45` only) (default) | scalar

Solution refinement factor, specified as the comma-separated pair consisting of `'Refine'` and a scalar. The scalar specifies a factor by which the number of output points should increase in each step.

- If the refinement factor is `1`, then the solver returns solutions only at the end of each step.
- If the refinement factor is `n>1`, then the solver subdivides each step into `n` smaller intervals and returns solutions at each point.

The default value for most solvers is `1`, but `ode45` uses a default of `4` to compensate for large step sizes.

The extra values produced by the refinement factor are computed by means of continuous extension formulas. These are specialized formulas used by the ODE solvers to obtain accurate solutions between computed time steps without significant increase in computation time.

Note: `Refine` does not apply when `length(tspan) > 2`, or when the ODE solver returns the solution as a structure.

Example: `opts = odeset('Refine',5)` increases the number of output points by a factor of five.

`'Stats'` — Solver statistics

`'off'` (default) | `'on'`

Solver statistics, specified as the comma-separated pair consisting of `'Stats'` and `'on'` or `'off'`. When `'on'`, the solver displays information after completing the solution:

- The number of successful steps
- The number of failed attempts
- The number of times the ODE function was called to evaluate $f(t,y)$

Implicit solvers display additional information about the solution:

- The number of times that the partial derivatives matrix $\partial f / \partial y$ was formed
- The number of LU decompositions
- The number of solutions of linear systems

Example: `opts = odeset('Stats','on')`

Step-Size

`'InitialStep'` — Suggested initial step size

scalar

Suggested initial step size, specified as the comma-separated pair consisting of `'InitialStep'` and a positive scalar. `InitialStep` sets an upper bound on the magnitude of the first step size that the ODE solver tries.

If you do not specify an initial step size, then the solver bases the initial step size on the slope of the solution at the initial time point, `tspan(1)`. If the slope of all solution components is zero, then the solver might try a step size that is too large. If you are aware that this is occurring, or if you want to be sure that the solver resolves important behavior at the beginning of the integration, then use `InitialStep` to provide a suitable initial step size.

Example: `opts = odeset('InitialStep',1e-3)` sets an upper bound of `1e-3` on the size of the initial step.

`'MaxStep'` — Maximum step size

`0.1*abs(t0-tf)` (default) | scalar

Maximum step size, specified as the comma-separated pair consisting of `'MaxStep'` and a positive scalar. `MaxStep` sets an upper bound on the size of any step taken by the solver. If the ODE has periodic behavior, for example, then setting `MaxStep` to a fraction of the period ensures that the solver does not enlarge the step so much that it steps over an area of interest.

- Do not use `MaxStep` just to obtain more output points, as it can significantly slow down the integration. Instead, use the `Refine` option to compute additional points at low computational cost.
- Do not use `MaxStep` to increase the accuracy of the solution. If the solution is not accurate enough, then reduce the value of `RelTol` and use the solution to determine a suitable value for `AbsTol`.
- Avoid using `MaxStep` to make sure the solver does not step over some behavior that occurs only once in the integration interval. If you know the time at which the behavior occurs, then break the interval into two pieces and call the solver twice. If you do not know the time at which the change occurs, try reducing `RelTol` and `AbsTol`. Use `MaxStep` only as a last resort in this case.

Example: `opts = odeset('MaxStep',1e-2)`

Event Location

`'Events'` — Event function

function handle

Event function, specified as the comma-separated pair consisting of `'Events'` and a function handle such as `@myEventsFcn`. The event function specified by the function handle must have the general form

```
[value,isterminal,direction] = myEventsFcn(t,y)
```

`value`, `isterminal`, and `direction` are vectors whose `i`th element corresponds to the `i`th event function:

- `value(i)` is the value of the `i`th event function.
- `isterminal(i) = 1` if the integration is to terminate at a zero of this event function. Otherwise, it is `0`.
- `direction(i) = 0` if all zeros are to be located (the default). A value of `+1` locates only zeros where the event function is increasing, and `-1` locates only zeros where the event function is decreasing.

See "Parameterizing Functions" to see how to pass in additional inputs to the events function.

If you specify an events function, you can call the ODE solver with three extra output arguments as

```
[t,y,te,ye,ie] = odeXY(odefun,tspan,y0,options)
```

The three additional outputs returned by the solver correspond to the detected events:

- `te` is a column vector of the times at which events occurred.
- `ye` is the solution value corresponding to the event times in `te`.
- `ie` are indices into the vector returned by the events function. The values indicate which event the solver detected.

Alternatively, you can call the solver with a single output as

```
sol = odeXY(odefun,tspan,y0,options)
```

In this case, the event information is stored in the structure as `sol.te`, `sol.ye`, and `sol.ie`.

The root finding mechanism employed by the ODE solver in conjunction with the event function has these limitations:

- If a terminal event occurs during the first step of the integration, then the solver registers the event as nonterminal and continues integrating.
- If more than one terminal event occurs during the first step, then only the first event registers and the solver continues integrating.

- Zeros are determined by sign crossings between steps. Therefore, zeros with an even number of crossings between steps can be missed.

If the solver steps past events, try reducing `RelTol` and `AbsTol` to improve accuracy. Alternatively, set `MaxStep` to place an upper bound on the step size. Adjusting `tspan` does not change the steps taken by the solver.

Example: The `ballode` example file contains an event function that detects the bounces of a ball.

Example: The `orbitode` example file contains an event function that detects points of interest in the orbit of a spaceship.

Data Types: `function_handle`

Jacobian Matrix

`'Jacobian'` — Jacobian matrix

matrix | function handle | cell array

Jacobian matrix, specified as the comma-separated pair consisting of `'Jacobian'` and a matrix or function that evaluates the Jacobian. The Jacobian is a matrix of partial derivatives of the function that defines the differential equations.

$$J = \frac{\partial f}{\partial y} = \begin{bmatrix} \frac{\partial f_1}{\partial y_1} & \frac{\partial f_1}{\partial y_2} & \cdots \\ \frac{\partial f_2}{\partial y_1} & \frac{\partial f_2}{\partial y_2} & \cdots \\ \vdots & \vdots & \\ & & \end{bmatrix}$$

For the stiff ODE solvers (`ode15s`, `ode23s`, `ode23t`, `ode23tb`, and `ode15i`), providing information about the Jacobian matrix is critical for reliability and efficiency. If you do not provide the Jacobian, then the ODE solver approximates it numerically using finite differences.

For `ode15i` *only*: The `Jacobian` option must specify matrices for both $\frac{\partial f}{\partial y}$ and $\frac{\partial f}{\partial y'}$. You can provide these matrices as a cell array of two constant matrices $\left\{\frac{\partial f}{\partial y}, \frac{\partial f}{\partial y'}\right\}$, or as a function that computes the matrices and has the general form

```
[dfdy, dfdp] = Fjac(t,y,yp)
```

For very large systems where it is not feasible to provide the entire analytic Jacobian, use the `JPattern` property to pass in the sparsity pattern of the Jacobian matrix. The solver uses the sparsity pattern to calculate a sparse Jacobian.

Example: `opts = odeset('Jacobian',@J)` specifies the function `J` that calculates the Jacobian matrix.

Example: `opts = odeset('Jacobian',[0 1; -2 1])` specifies a constant Jacobian matrix.

Example: `opts = odeset('Jacobian',{A,Ap})` specifies two constant Jacobian matrices for use with `ode15i`.

Data Types: `single` | `double` | `cell` | `function_handle`

`'JPattern'` — Jacobian sparsity pattern
sparse matrix | cell array

Jacobian sparsity pattern, specified as the comma-separated pair consisting of `'JPattern'` and a sparse matrix. The sparse matrix contains `1`s where there might be nonzero entries in the Jacobian. The ODE solver uses the sparsity pattern to generate a sparse Jacobian matrix numerically. Use this option to improve execution time when the ODE system is large and you cannot provide an analytic Jacobian.

For `ode15i` *only*: Set the `JPattern` option using a cell array containing two sparse matrices `{dfdyPattern, dfdypPattern}`, which are the sparsity patterns for $\frac{\partial f}{\partial y}$ and $\frac{\partial f}{\partial y'}$.

Note: If you specify a Jacobian matrix using `Jacobian`, then the solver ignores any setting for `JPattern`.

Example: `opts = odeset('JPattern',S)` specifies the Jacobian sparsity pattern using sparse matrix `S`.

Example: `opts = odeset('JPattern',{dFdy, dFdyp})` specifies two constant Jacobian sparsity patterns for use with `ode15i`.

Data Types: `double` | `cell`

`'Vectorized'` — Vectorized function toggle

`'off'` (default) | `'on'` | cell array

Vectorized function toggle, specified as the comma-separated pair consisting of `'Vectorized'` and either `'off'` or `'on'`. Use this option to inform the ODE solver that the function is coded so that it accepts and returns vectors for the second argument. That is, `f(t,[y1 y2 y3...])` returns `[f(t,y1) f(t,y2) f(t,y3) ...]`. Compared to evaluating values one at a time, this vectorization allows the solver to reduce the number of function evaluations required to compute all the columns of the Jacobian matrix, and might significantly reduce solution time. See "Array vs. Matrix Operations" for a description of the elementwise operators that support vectorization.

For `ode15i` only: Set the `Vectorized` option using a two-element cell array. Set the first element to `'on'` if `f(t,[y1,y2,...],yp)` returns `[f(t,y1,yp), f(t,y2,yp), ...]`. Set the second element to `'on'` if `f(t,y,[yp1,yp2,...])` returns `[f(t,y,yp1), f(t,y,yp2), ...]`. The default value of `Vectorized` in this case is `{'off','off'}`.

Note: If you specify a Jacobian matrix using `Jacobian`, then the solver ignores a setting of `'on'` for `Vectorized`.

Example: `opts = odeset('JPattern',S,'Vectorized','on')` specifies that the function is vectorized and sets the Jacobian sparsity pattern.

Example: `opts = odeset('JPattern',{dy,dyp},'Vectorized',{'on','on'})` specifies that the function is vectorized with respect to `y` and `yp`, and also sets the Jacobian sparsity pattern for use with `ode15i`.

Mass Matrix and DAEs (do not apply to `ode15i`)

`'Mass'` — Mass matrix

matrix | function handle

Mass matrix, specified as the comma-separated pair consisting of `'Mass'` and a matrix or function handle. The ODE solvers can solve problems containing a mass matrix of the form $M(t,y)y' = f(t,y)$, where $M(t,y)$ is a mass matrix that can be full or sparse (the `ode23s` solver can solve only equations with constant mass matrices).

- When the mass matrix is nonsingular, the equation simplifies to $y' = M^{-1} f(t,y)$ and the ODE has a solution for any initial value. However, it is often more convenient and natural to express the model in terms of the mass matrix directly using $M(t,y)y' = f(t,y)$, and avoiding the computation of the matrix inverse reduces the storage and execution time needed to solve the problem.
- When $M(t,y)$ is a singular matrix, then the problem is a system of differential algebraic equations (DAEs). A DAE has a solution only when `y0` is consistent; that is, there exists an initial slope `yp0` such that `M(t0,y0)yp0 = f(t0,y0)`, where `yp0` is specified using the `InitialSlope` option. DAEs are characterized by their differential index, or the number of derivatives required to simplify the system to an equivalent system of ODEs. For DAEs of index 1, solving an initial value problem with consistent initial conditions is much like solving an ODE. The `ode15s` and `ode23t` solvers can solve DAEs of index 1. When solving DAEs, it is advantageous to formulate the problem so that the mass matrix is a diagonal matrix (a semiexplicit DAE).

In all cases, mass matrices that are time- or state-dependent (instead of constant) require the use of additional options:

- For problems of the form $M(t)y' = f(t,y)$, set the `MStateDependence` option to `'none'`. This ensures that the solver calls the mass matrix function with a single input argument for `t`.
- If the mass matrix depends on `y`, then set `MStateDependence` to either `'weak'` (default) or `'strong'`. In both cases the solver calls the mass matrix function with two inputs `(t,y)`, but the `'weak'` option results in implicit solvers using approximations when solving algebraic equations.
- If the system contains many equations with a strongly state-dependent mass matrix $M(t,y)$, then set `MvPattern` to a sparse matrix `S` to specify the sparsity pattern.

Example: The example files `fem2ode` and `batonode` illustrate different uses of the mass matrix.

Data Types: `single` | `double` | `function_handle`

`'MStateDependence'` — State dependence of mass matrix
`'weak'` (default) | `'none'` | `'strong'`

State dependence of mass matrix, specified as the comma-separated pair consisting of `'MStateDependence'` and `'weak'`, `'strong'`, or `'none'`.

- For problems of the form $M(t)y' = f(t,y)$, set the `MStateDependence` option to `'none'`. This ensures that the solver calls the mass matrix function with a single input argument for `t`.
- If the mass matrix depends on `y`, then set `MStateDependence` to either `'weak'` (default) or `'strong'`. In both cases the solver calls the mass matrix function with two inputs `(t,y)`, but the `'weak'` option results in implicit solvers using approximations when solving algebraic equations.

Example: `opts = odeset('Mass',@M,'MStateDependence','none')` specifies that the mass matrix `M` depends only on `t`.

`'MvPattern'` — Mass matrix sparsity pattern
sparse matrix

Mass matrix sparsity pattern, specified as the comma-separated pair consisting of `'MvPattern'` and a sparse matrix. Use this option to specify the sparsity pattern of the matrix $\frac{\partial}{\partial y}\left[M(t,y)v\right]$. The sparse matrix `S` has `S(i,j) = 1` if for any `k`, the `(i,k)` component of $M(t,y)$ depends on component `j` of `y`.

Note: `MvPattern` is for use by `ode15s`, `ode23t`, and `ode23tb` when `MStateDependence` is `'strong'`.

Example: `opts = odeset('MStateDependence','strong','MvPattern',S)`

`'MassSingular'` — Singular mass matrix toggle
`'maybe'` (default) | `'yes'` | `'no'`

Singular mass matrix toggle, specified as the comma-separated pair consisting of `'MassSingular'` and `'maybe'`, `'yes'`, or `'no'`. The default value of `'maybe'` causes

the solver to test whether the problem is a DAE, by testing whether the mass matrix is singular. Avoid this check by specifying `'yes'` if you know the system is a DAE, or `'no'` if it is not.

`'InitialSlope'` — Consistent initial slope

vector of zeros (default) | vector

Consistent initial slope, specified as the comma-separated pair consisting of `'InitialSlope'` and a vector. Use this option with the `ode15s` and `ode23t` solvers when solving DAEs. The specified vector is the initial slope y'_0 such that $M(t_0, y_0)y'_0 = f(t_0, y_0)$. If the specified initial conditions are not consistent, then the solver treats them as guesses, attempts to compute consistent values that are close to the guesses, and continues to solve the problem.

Data Types: `single` | `double`

Only for `ode15s` and `ode15i`

`'MaxOrder'` — Maximum order of formula

5 (default) | 4 | 3 | 2 | 1

Maximum order of formula, specified as the comma-separated pair consisting of `'MaxOrder'` and an integer between 1 and 5. Use this option to specify the maximum order used in the numerical differentiation formulas (NDFs) or backward differentiation formulas (BDFs) that are used by the variable-order solvers `ode15s` and `ode15i`.

`'BDF'` — Toggle to use BDFs with `ode15s`

`'off'` (default) | `'on'`

Toggle to use backward differentiation formulas (BDFs) with `ode15s`, specified as the comma-separated pair consisting of `'BDF'` and either `'off'` or `'on'`. The default numerical differentiation formulas (NDFs) are generally more efficient than BDFs, but the two are closely related.

Example: `opts = odeset('BDF','on','MaxOrder',4)` enables the use of BDFs by `ode15s` with a maximum order of 4.

Output Arguments

`options` — Options structure
structure

Options structure. `options` can be used as a fourth input argument to `ode45`, `ode23`, `ode113`, `ode15s`, `ode23s`, `ode23t`, `ode23tb`, or `ode15i`.

Tips

- See "Summary of ODE Examples and Files" for a list of ODE examples that illustrate the use of various options.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- All inputs must be constant.

See Also

See Also

`deval` | `odeget` | `odextend`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"
"ODE Event Location"
"Nonnegative ODE Solution"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

odextend

Extend solution to ODE

Syntax

```
solext = odextend(sol,odefun,tfinal)
solext = odextend(sol,[],tfinal)
solext = odextend(sol,odefun,tfinal,y0)
solext = odextend(sol,odefun,tfinal,y0,options)
```

Description

`solext = odextend(sol,odefun,tfinal)` extends the solution `sol` by integrating `odefun` from `sol.x(end)` to `tfinal`, using the same ODE solver that created `sol`. The function `odefun` can be different than the original function used to compute `sol`. The lower bound for the independent variable in `solext` is the same as in `sol`, that is, `sol.x(1)`. By default, `odextend` uses:

- The initial conditions `y = sol.y(:,end)` for the subsequent integration.
- The same integration properties and additional input arguments that the ODE solver originally used to compute `sol`. This information is stored in the solution structure `sol` and is later returned in `solext`. Unless you want to change these values, you do not need to pass them to `odextend`.

`solext = odextend(sol,[],tfinal)` extends the solution to the same ODE function that was solved to obtain `sol`.

`solext = odextend(sol,odefun,tfinal,y0)` specifies new initial conditions `y0` for the extended integration instead of using `sol.y(:,end)`.

For the `ode15i` solver: `y0` must be an m-by-2 matrix containing column vectors of initial conditions for the solution components and their derivatives, `y0 = [yinit ypinit]`.

`solext = odextend(sol,odefun,tfinal,y0,options)` uses the integration options defined by `options`, which is an argument created using the `odeset` function.

The specified options override the options that the ODE solver originally used to compute `sol`. You can optionally specify `y0 = []` to use default initial conditions.

Examples

Evaluate and Extend Solution Structure

The van der Pol equation is a second order ODE

$$y_1'' - \mu\left(1 - y_1^2\right)y_1' + y_1 = 0.$$

Solve the van der Pol equation with $\mu = 1$ using `ode45`. The function `vdp1.m` ships with MATLAB® and encodes the equations. Specify a single output to return a structure containing information about the solution, such as the solver and evaluation points.

```
tspan = [0 20];
y0 = [2 0];
sol = ode45(@vdp1,tspan,y0)
```

```
sol = struct with fields:
     solver: 'ode45'
    extdata: [1×1 struct]
          x: [1×60 double]
          y: [2×60 double]
      stats: [1×1 struct]
      idata: [1×1 struct]
```

Use `linspace` to generate 250 points in the interval `[0 20]`. Evaluate the solution at these points using `deval`.

```
x = linspace(0,20,250);
y = deval(sol,x);
```

Plot the first component of the solution.

```
plot(x,y(1,:))
```

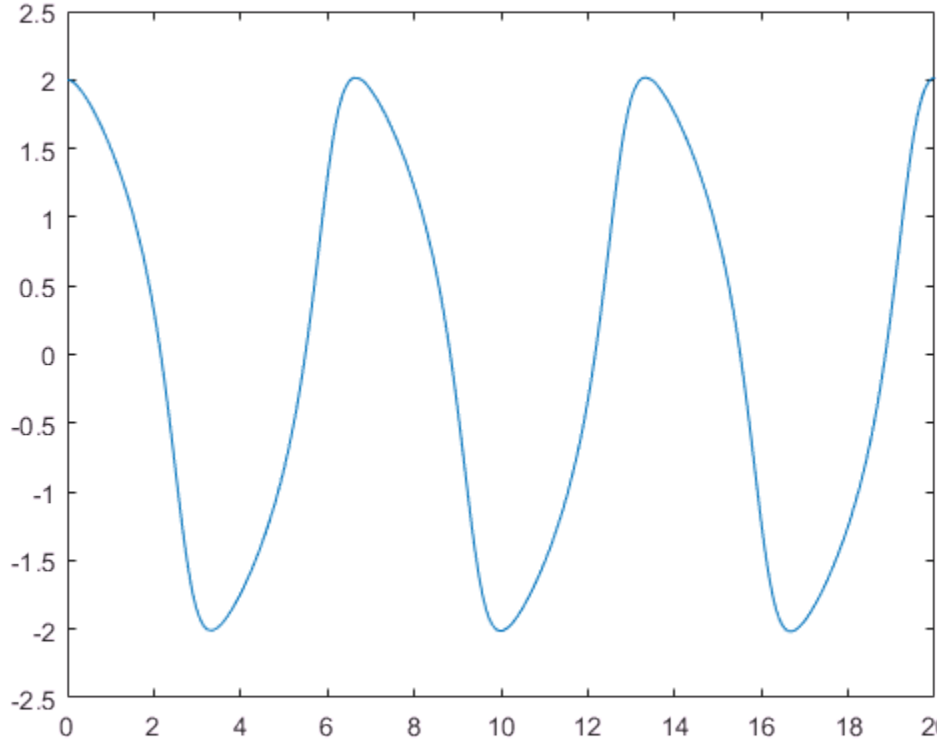

Extend the solution to $t_f = 35$ using `odextend` and add the result to the original plot.

```
sol_new = odextend(sol,@vdp1,35);
x = linspace(20,35,350);
y = deval(sol_new,x);
hold on
plot(x,y(1,:),'r')
```

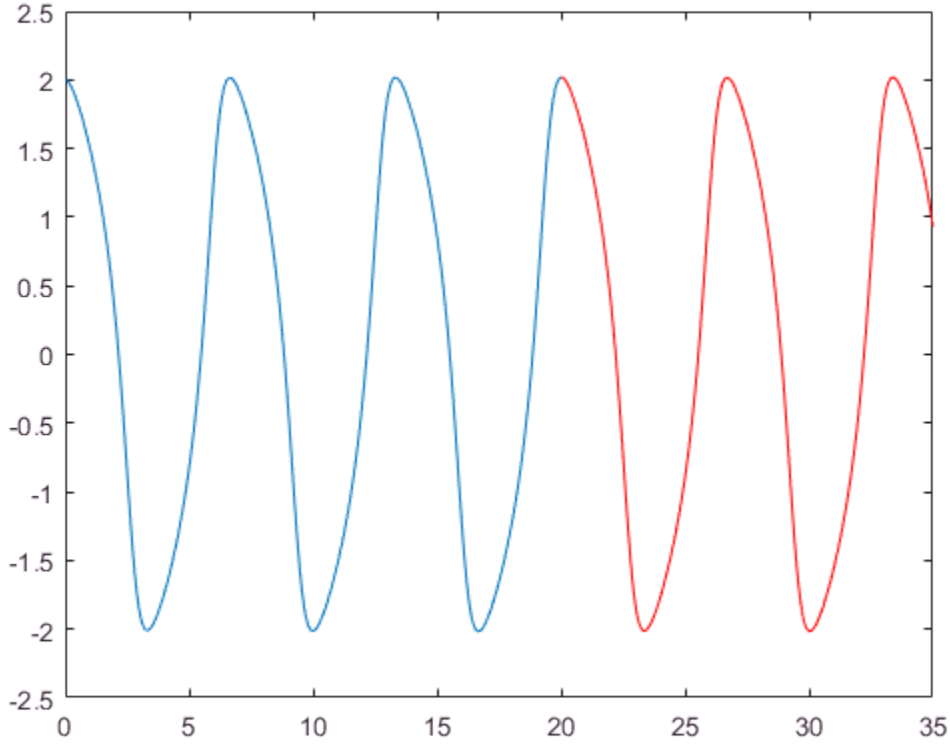

Input Arguments

`sol` — Solution structure

structure

Solution structure, specified as a structure returned by an ODE solver. When you call an ODE solver with a single output argument, it returns a solution structure.

Example: `sol = ode45(myode,tspan,y0)`

Data Types: `struct`

`odefun` — Function to solve

`[]` | function handle

Function to solve, specified as a function handle. Use this input to extend the solution using a new or modified ODE function. To continue using the original ODE function used to create the solution structure `sol`, specify `odefun` as an empty input `[]`.

Data Types: `function_handle`

`tfinal` — Final integration time

scalar

Final integration time, specified as a scalar.

Data Types: `single` | `double`

`y0` — Initial conditions

`[]` | scalar | vector | matrix

Initial conditions, specified as a scalar, vector, or matrix. By default `odextend` uses the initial conditions `y = sol.y(:,end)` to extend the integration. Use this input to specify new initial conditions for the extended integration.

For the `ode15i` solver: `y0` must be an m-by-2 matrix containing column vectors of initial conditions for the solution components and their derivatives, `y0 = [yinit ypinit]`.

Data Types: `single` | `double`

`options` — Options structure

structure

Options structure. By default, `odextend` uses the same options and additional inputs as the ODE solver originally used to compute `sol`. Use this input to specify a new options structure that overrides the options used to create `sol`.

Use the `odeset` function to create or modify an ODE options structure.

Data Types: `struct`

Output Arguments

`solext` — Extended solution

structure

Extended solution, returned as a structure. Use this structure with the `deval` function to evaluate the solution at any point in the interval `[t0 tf]`. The `solext` structure array always includes these fields:

Structure Field	Description
`sol.x`	Row vector of the steps chosen by the solver.
`sol.y`	Each column `sol.y(:,i)` contains the solution at time `sol.x(i)`.
`sol.solver`	Solver name.

Additionally, if you specify the `Events` option and events are detected, then `solext` also includes these fields:

Structure Field	Description
`sol.xe`	Points when events occurred. `sol.xe(end)` contains the exact point of a terminal event, if any.
`sol.ye`	Solutions that correspond to events in `sol.xe`.
`sol.ie`	Indices into the vector returned by the function specified in the `Events` option. The values indicate which event the solver detected.

See Also

See Also

`deval` | `odeget` | `odeset`

Topics

"Choose an ODE Solver"
"Summary of ODE Options"
"Troubleshoot Common ODE Problems"

Introduced before R2006a

onCleanup

Cleanup tasks upon function completion

Syntax

```
cleanupObj = onCleanup(cleanupFun)
```

Description

`cleanupObj = onCleanup(cleanupFun)` creates an object that, when destroyed, executes the function `cleanupFun`. MATLAB implicitly clears all local variables at the termination of a function, whether by normal completion, or a forced exit, such as an error, or **Ctrl+C**.

If you reference or pass `cleanupObj` outside your function, then `cleanupFun` does not run when that function terminates. Instead, it runs whenever MATLAB destroys the object.

Examples

Close a Figure After Executing Function

Save the following code in `action.m` and type `action` in the Command Window.

```
function [] = action()
f = figure;
finishup = onCleanup(@() myCleanupFun(f));
disp('Display Figure')
end

function myCleanupFun(f)
close(f)
disp('Close Figure')
end
```

```
Display Figure
```

```
Close Figure
```

Switch Directories After Executing Function

Pass your own script to the `onCleanup` object so that it executes when MATLAB destroys the cleanup object.

Save the following code in `cleanup.m`.

```
cd(tempdir)
disp('You are now in the temporary folder')
```

Save the following code in `youraction.m` and type `youraction` in the Command Window.

```
function [] = youraction
 changeup = onCleanup(@cleanup);
 disp('Execute Code')
end
```

```
Execute Code
You are now in the temporary folder
```

Input Arguments

`cleanupFun` — Clean-up task
function handle

Clean-up task, specified as a handle to a function.

You can declare any number of `onCleanup` objects in a program file. However, if the clean-up tasks depend on the order of execution, then you should define only one object that calls a script or function, containing the relevant clean-up commands.

You should use an anonymous function handle to call your clean-up task. This allows you to pass arguments to your clean-up function.

Example: `@() fclose('file.m')`

Example: `@() user_script`

Example: `@() function(input)`

Data Types: `function_handle`

Tips

- Avoid using nested functions during cleanup. MATLAB can clear variables used in nested functions before the clean-up function tries to read from them.
- If your program contains multiple cleanup objects, MATLAB does not guarantee the order that it destroys these objects.
- If the order of your cleanup functions matters, define one `onCleanup` object for all the tasks.

See Also

See Also

`clear` | `clearvars`

Topics

"Clean Up When Functions Complete"
"Object Lifecycle"
"Function Handles"
"What Are Anonymous Functions?"

Introduced in R2008a

ones

Create array of all ones

Syntax

```
X = ones
X = ones(n)
X = ones(sz1,...,szN)
X = ones(sz)

X = ones(classname)
X = ones(n,classname)
X = ones(sz1,...,szN,classname)
X = ones(sz,classname)

X = ones('like',p)
X = ones(n,'like',p)
X = ones(sz1,...,szN,'like',p)
X = ones(sz,'like',p)
```

Description

`X = ones` returns the scalar `1`.

`X = ones(n)` returns an `n`-by-`n` matrix of ones.

`X = ones(sz1,...,szN)` returns an `sz1`-by-...-by-`szN` array of ones where `sz1,...,szN` indicates the size of each dimension. For example, `ones(2,3)` returns a 2-by-3 array of ones.

`X = ones(sz)` returns an array of ones where the size vector, `sz`, defines `size(X)`. For example, `ones([2,3])` returns a 2-by-3 array of ones.

`X = ones(classname)` returns a scalar `1` where `classname` specifies the data type. For example, `ones('int8')` returns a scalar, 8-bit integer `1`.

`X = ones(n,classname)` returns an `n`-by-`n` array of ones of data type `classname`.

`X = ones(sz1,...,szN,classname)` returns an `sz1`-by-...-by-`szN` array of ones of data type `classname`.

`X = ones(sz,classname)` returns an array of ones where the size vector, `sz`, defines `size(X)` and `classname` defines `class(X)`.

`X = ones('like',p)`returns a scalar `1` with the same data type, sparsity, and complexity (real or complex) as the numeric variable, `p`.

`X = ones(n,'like',p)` returns an `n`-by-`n` array of ones like `p`.

`X = ones(sz1,...,szN,'like',p)` returns an `sz1`-by-...-by-`szN` array of ones like `p`.

`X = ones(sz,'like',p)` returns an array of ones like `p` where the size vector, `sz`, defines `size(X)`.

Examples

Square Array of Ones

Create a 4-by-4 array of ones.

```
X = ones(4)
```

```
X =

     1     1     1     1
     1     1     1     1
     1     1     1     1
     1     1     1     1
```

3-D Array of Ones

Create a 2-by-3-by-4 array of ones.

```
X = ones(2,3,4);
```

```
size(X)
```

```
ans =
```

```
     2     3     4
```

Size Defined by Existing Array

Define a 3-by-2 array A.

```
A = [1 4 ; 2 5 ; 3 6];
```

```
sz = size(A)
```

```
sz =

     3     2
```

Create an array of ones that is the same size as A

```
X = ones(sz)
```

```
X =

     1     1
     1     1
     1     1
```

Nondefault Numeric Data Type

Create a 1-by-3 vector of ones whose elements are 16-bit unsigned integers.

```
X = ones(1,3,'uint16'),
```

```
X = 1×3 uint16 row vector

   1   1   1
```

```
class(X)
```

```
ans =
'uint16'
```

Complex One

Create a scalar 1 that is not real valued, but instead is complex like an existing array.

Define a complex vector.

```
p = [1+2i 3i];
```

Create a scalar 1 that is complex like p.

```
X = ones('like',p)
```

```
X =
   1.0000 + 0.0000i
```

Size and Numeric Data Type Defined by Existing Array

Define a 2-by-3 array of 8-bit unsigned integers.

```
p = uint8([1 3 5 ; 2 4 6]);
```

Create an array of ones that is the same size and data type as p.

```
X = ones(size(p),'like',p),
```

```
X = 2×3 uint8 matrix

   1   1   1
   1   1   1
```

```
class(X)
```

```
ans =
'uint8'
```

Input Arguments

n — Size of square matrix
integer value

Size of square matrix, specified as an integer value, defines the output as a square, n-by-n matrix of ones.

- If `n` is `0`, then `X` is an empty matrix.
- If `n` is negative, then it is treated as `0`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz1,...,szN` — Size of each dimension

two or more integer values

Size of each dimension, specified as two or more integer values, defines `X` as a sz1-by...-by-szN array.

- If the size of any dimension is `0`, then `X` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- If any trailing dimensions greater than `2` have a size of `1`, then the output, `X`, does not include those dimensions.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz` — Output size

row vector of integer values

Output size, specified as a row vector of integer values. Each element of this vector indicates the size of the corresponding dimension.

- If the size of any dimension is `0`, then `X` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- If any trailing dimensions greater than `2` have a size of `1`, then the output, `X`, does not include those dimensions.

Example: `sz = [2,3,4]` defines `X` as a 2-by-3-by-4 array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`classname` — Output class

`'double'` (default) | `'single'` | `'logical'` | `'int8'` | `'uint8'` | ...

Output class, specified as `'double'`, `'single'`, `'logical'`, `'int8'`, `'uint8'`, `'int16'`, `'uint16'`, `'int32'`, `'uint32'`, `'int64'`, or `'uint64'`.

Data Types: `char`

p — Prototype
variable

Prototype, specified as a variable.

Data Types: `double` | `single` | `logical` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`
Complex Number Support: Yes

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Dimensions must be real, nonnegative integers.

See Also

See Also

`complex` | `eye` | `false` | `rand` | `randn` | `size` | `zeros`

Topics

"Class Support for Array-Creation Functions"
"Preallocation"

Introduced before R2006a

matlab.lang.OnOffSwitchState class

Package: matlab.lang

Represent on and off states with logical values

Description

`matlab.lang.OnOffSwitchState` is an enumeration class that derives from the `logical` class. Use this class to implement properties that accept values of `'on'` and `'off'` and logical `true`, `false`, `1`, or `0`.

Use this class to constrain property values to any of these values:

Class	Logical True	Logical False
Character vector	`'on'`	`'off'`
String scalar	`"on"`	`"off"`
Logical	`true`	`false`
Logical and numeric	`1`	`0`
Enumeration member	`matlab.lang.OnOffSwitc`	`matlab.lang.OnOffSwitchState.off`

Because `OnOffSwitchState` derives from the `logical` class, you can use these enumeration members in logical expressions.

Enumeration Members

`off`	Logical false
`on`	Logical true

Examples

Enable Property Values to Be Logical or on/off

Use `OnOffSwitchState` to define the class of these properties.

```
classdef SystemState
   properties
      Power matlab.lang.OnOffSwitchState = 'off'
      Monitor matlab.lang.OnOffSwitchState = 'off'
   end
   methods
      function val = isOn(obj)
         if ~(obj.Power && obj.Monitor)
            val = matlab.lang.OnOffSwitchState.off;
         else
            val = matlab.lang.OnOffSwitchState.on;
         end
      end
   end
end
```

Create an object and set the property values to `'on'`.

```
a = SystemState;
a.Power = 'on';
a.Monitor = 'on';
```

You can call the `isOn` method to determine the state of the system. The method returns a logical value provided by the `OnOffSwitchState` enumeration.

```
if isOn(a)
   ...% System is ready to use
end
```

- "Validate Property Values"

See Also

See Also

`logical`

Topics

"Validate Property Values"

Introduced in R2017a

open

Open file in appropriate application

Syntax

```
open name
A = open(name)
```

Description

`open name` opens the specified file or variable in the appropriate application.

You can extend the functionality of `open` by defining your own file-handling function of the form `open`*`xxx`*, where *`xxx`* is a file extension. For example, if you create a function `openlog`, the `open` function calls `openlog` to process any files with the `.log` extension. The `open` function returns any single output defined by your function.

`A = open(name)` returns a structure if `name` is a MAT-file or a figure handle if `name` is a figure. Otherwise, `open` returns an empty array. For increased flexibility and options, use the `load` function to open MAT-files, and the `openfig` function to open figures.

Examples

Open a File

Open the file `num2str.m` in the Editor. MATLAB opens the file *`matlabroot`*`\toolbox\matlab\strfun\num2str.m`. If a file called `num2str.m` exists in a folder that is before `toolbox\matlab\strfun` on the MATLAB path, MATLAB opens that file instead.

```
open num2str.m
```

Open a File Not on the Path

Open a file not on the MATLAB path by including the complete file specification. If the file does not exist, MATLAB displays an error message.

```
open C:\temp\data.mat
```

Create a Function to Handle an Extension

Create a function called `opentxt` to handle files with a `.txt` extension.

```
function opentxt(filename)
   [~, name, ext] = fileparts(filename);
   fprintf('You have requested file: %s\n', [name ext]);

   if exist(filename, 'file') == 2
     fprintf('Opening in MATLAB Editor: %s\n', [name ext]);
     edit(filename);
   else
      wh = which(filename);
      if ~isempty(wh)
         fprintf('Opening in MATLAB Editor: %s\n', wh);
         edit(wh);
      else
        warning('MATLAB:fileNotFound', ...
                'File was not found: %s', [name ext]);
      end
   end

end
```

Create a text file.

```
dlmwrite('myTestFile.txt',[1,2,3,4]);
```

Read the data from the file. The `open` function calls the function `opentxt` to open the file.

```
open('myTestFile.txt');
```

```
You have requested file: myTestFile.txt
Opening in MATLAB Editor: myTestFile.txt
```

Input Arguments

`name` — Name of file or variable to open

character array

Name of file or variable to open, specified as a character array. If `name` does not include an extension, MATLAB searches for variables and files according to the "Function Precedence Order". If `name` is a variable, the `open` function opens it in the Variables editor. Otherwise, the `open` function performs one of these actions based on the file extension:

`.m` or `.mlx`	Open code file in MATLAB Editor.
`.mat`	Return variables in structure `A` when called with the syntax `A = open(name)`.
`.fig`	Open figure in Figure window.
`.mdl` or `.slx`	Open model in Simulink.
`.prj`	Open project in the MATLAB Compiler Deployment Tool.
`.doc*`	Open document in Microsoft Word.
`.exe`	Run executable file (only on Windows systems).
`.pdf`	Open document in Adobe® Acrobat®.
`.ppt*`	Open document in Microsoft PowerPoint.
`.xls*`	Start MATLAB Import Wizard.
`.htm` or `.html`	Open document in MATLAB browser.
`.slxc`	Open report file for the Simulink cache file.

See Also

See Also

`edit` | `load` | `openfig` | `openvar` | `which` | `winopen`

Introduced before R2006a

openfig

Open figure saved in FIG-file

Syntax

```
openfig(filename)
openfig(filename,copies)
openfig( ___ ,visibility)
```

```
fig = openfig( ___ )
```

Description

`openfig(filename)` opens the figure saved in the MATLAB figure file (FIG-file) called `filename`.

`openfig(filename,copies)` specifies whether to open a new copy of the figure in the case that a copy is already open. If you do not want to create a new copy, set `copies` to `'reuse'`. The `'reuse'` option brings the existing figure to the front of the screen. To open a new copy of the figure regardless of whether a copy is already open, set `copies` to `'new'` . The `'new'` option is the default behavior.

`openfig( ___ ,visibility)` specifies whether to open the figure in a visible or invisible state. To display the figure, set `visibility` to `'visible'`. If you do not want to display the figure, use the `'invisible'` setting. You can use this option with any of the input argument combinations in the previous syntaxes.

`fig = openfig( ___ )` returns the figure object. Set properties of the figure object to modify its appearance or behavior. For a list of properties, see Figure Properties.

Examples

Open Figure Saved in MATLAB Figure File

Create a surface plot and save the figure as a MATLAB figure file. Then, close the figure.

```
surf(peaks)
savefig('MySavedPlot.fig')
close(gcf)
```

Open the saved figure.

```
openfig('MySavedPlot.fig')
```

Open Invisible Figure in Visible State

Create a surface plot and make the figure invisible. Then, save the figure as a MATLAB figure file. Close the invisible figure.

```
surf(peaks)
set(gcf,'Visible','off')
savefig('MySavedPlot.fig')
close(gcf)
```

Open the saved figure and make it visible on the screen.

```
openfig('MySavedPlot.fig','visible')
```

Input Arguments

`filename` — File name of saved figure

character vector

File name of saved figure, specified as a character vector. You do not have to specify the full file path, as long as it is on your MATLAB path. Including `.fig` in the file name is optional.

Example: `openfig('MySavedFigure.fig')`

`copies` — Control for opening multiple copies of figure

`'new'` (default) | `'reuse'`

Control for opening multiple copies of the figure, specified as one of these values:

- `'new'` — Open a new copy of the figure, even if a copy already exists on the screen.
- `'reuse'` — Open a new copy of the figure only if one does not exist. If a copy exists, then bring the existing copy to the front of the screen. If the figure is off the screen, then `'reuse'` repositions the figure so that it is completely on the screen. This option

helps provide compatibility with different screen sizes and resolutions by ensuring that the figure displays on screen.

Example: `openfig('MySavedFigure.fig','reuse')`

`visibility` — Figure visibility
`'visible'` | `'invisible'`

Figure visibility, specified as one of these values:

- `'visible'` — Open the saved figure in a visible state. If the MATLAB figure file contains an invisible figure, then you can use this option to make the figure visible when it opens.
- `'invisible'` — Open the saved figure in an invisible state.

Example: `openfig('MySavedFigure.fig','invisible')`

Output Arguments

`fig` — Figure object
figure object

Figure object. Set properties of the figure to change the appearance or behavior of the opened figure. For a list of properties, see Figure Properties.

Limitations

- Do not use `openfig` to open FIG-files created with GUIDE. Use the `guide` function instead.

See Also

See Also
`open` | `saveas` | `savefig`

Topics
"Save Figure to Reopen in MATLAB Later"

Introduced before R2006a

opengl

Control OpenGL rendering

Syntax

```
opengl info
d = opengl('data')

opengl software
opengl hardware
opengl hardwarebasic

opengl('save',pref)
```

Description

`opengl info` prints information about the OpenGL implementation currently in use by MATLAB, such as the version, vendor, and graphics features that it supports. The returned fields might change in future releases as graphics features change. Using this command loads OpenGL.

`d = opengl('data')` returns the same data provided with `opengl info`, but stores it in a structure.

`opengl software` uses a software version of OpenGL to render subsequent graphics for the current MATLAB session. This command works only on Windows systems.

`opengl hardware` uses a hardware-accelerated version of OpenGL to render subsequent graphics. If your graphics hardware does not support hardware-accelerated OpenGL, then MATLAB uses a software version instead.

`opengl hardwarebasic` uses a hardware-accelerated version of OpenGL, but disables some advanced graphics features that are unstable with certain graphics drivers. If your graphics hardware does not support hardware-accelerated OpenGL, then MATLAB uses a software version instead.

`opengl('save',pref)` sets your preferences so that future sessions of MATLAB on this computer use the preferred version of OpenGL. Specify `pref` as `'software'`, `'hardware'`, `'hardwarebasic'`, or `'none'`. This command does not affect the current session.

Note: The `autoselect`, `neverselect`, `advise`, `quiet`, `verbose`, and `DriverBugWorkaround` inputs have been removed in R2014b. For more information about the behavior of these syntaxes in previous releases, see opengl for R2014a.

Examples

Display Information About OpenGL

Using the `opengl info` command, display information about the OpenGL implementation currently in use by MATLAB. For example, display the vendor, the version, and the supported graphics features. Also display whether MATLAB is using a hardware-accelerated implementation or a software implementation of OpenGL.

```
opengl info
```

```
                         Version: '3.3.0'
                          Vendor: 'NVIDIA Corporation'
                        Renderer: 'Quadro 400/PCIe/SSE2'
            RendererDriverVersion: '9.18.13.4192'
        RendererDriverReleaseDate: '13-Oct-2015'
                    MaxTextureSize: 8192
                          Visual: 'Visual 0x07, (RGBA 32 bits (8 8 8 8), Z depth 16 b
                        Software: 'false'
             HardwareSupportLevel: 'full'
        SupportsGraphicsSmoothing: 1
    SupportsDepthPeelTransparency: 1
       SupportsAlignVertexCenters: 1
                      Extensions: {249×1 cell}
                MaxFrameBufferSize: 8192
```

Determine Graphics Hardware

Using the `opengl info` command, determine your graphics hardware by checking the `Vendor` and `Renderer` fields.

```
opengl info

                          Version: '3.3.0'
                           Vendor: 'NVIDIA Corporation'
                         Renderer: 'Quadro 400/PCIe/SSE2'
            RendererDriverVersion: '9.18.13.3182'
        RendererDriverReleaseDate: '11-Nov-2013'
                    MaxTextureSize: 8192
                           Visual: 'Visual 0x07, (RGBA 32 bits...'
                         Software: 'false'
             HardwareSupportLevel: 'full'
        SupportsGraphicsSmoothing: 1
    SupportsDepthPeelTransparency: 1
       SupportsAlignVertexCenters: 1
                       Extensions: {248x1 cell}
                MaxFrameBufferSize: 8192
```

Note: If the returned fields contain the line `Software: 'true'`, then you are using software OpenGL and the name listed in the `Vendor` field is not your graphics hardware vendor. Instead, the `Vendor` field indicates the manufacturer of the software OpenGL implementation.

Determine Graphics Hardware When Using Software OpenGL (Windows)

Close all figures, switch to hardware OpenGL, and issue the `opengl info` command. Then, switch back to software OpenGL.

```
close all
opengl hardware
opengl info
opengl software
```

Determine Graphics Hardware When Using Software OpenGL (Linux)

Start MATLAB with the `-nosoftwareopengl` flag. Then, issue the `opengl info` command.

Use Software OpenGL for Current Session

Switch to using software OpenGL to render graphics in the current session.

```
opengl software
```

This command works only on Windows systems.

Use Software OpenGL for Future Sessions

Set your preferences so that MATLAB uses software OpenGL to render graphics in all future sessions. This command does not affect the current session.

```
opengl('save','software')
```

Input Arguments

`info` — Information about OpenGL implementation

`info`

Information about the OpenGL implementation currently in use by MATLAB, specified as `info`. The `opengl info` command returns the fields listed in this table.

Field	Description
`Version`	Version of the OpenGL implementation.
`Vendor`	Manufacturer of the OpenGL implementation.
`RendererDriverVersion`	Version of the OpenGL driver (Windows systems with hardware-accelerated OpenGL only). This field does not display on virtual machines.
`RendererDriverReleaseDate`	Release date of the OpenGL driver (Windows systems with hardware-accelerated OpenGL only). This field does not display on virtual machines.
`Renderer`	Description of the OpenGL renderer. If you are using hardware-accelerated OpenGL, this field is the graphics card model name.
`MaxTextureSize`	Maximum texture size supported by the OpenGL implementation.
`Visual`	Display properties of the OpenGL implementation.

Field	Description
`Software`	Software OpenGL enabled, returned as `'true'` or `'false'`.
`HardwareSupportLevel`	Hardware support level, returned as one of these values: • `'full'` — Hardware-accelerated OpenGL (all graphics features enabled) • `'basic'` — Basic hardware-accelerated OpenGL (some graphics features disabled) • `'none'` — Software OpenGL If MATLAB detects an unsupported driver, this field also contains `'known graphics driver issues'`.
`SupportsGraphicsSmoothing`	Graphics smoothing feature support, returned as `1` if supported or `0` otherwise.
`SupportsDepthPeelTransparency`	Depth peel transparency feature support, returned as `1` if supported or `0` otherwise.
`SupportsAlignVertexCenters`	Align vertex centers feature support, returned as `1` if supported or `0` otherwise.
`Extensions`	Extended capabilities supported by the OpenGL implementation.
`MaxFrameBufferSize`	Maximum frame buffer size supported by the OpenGL implementation.

For more information about the graphics smoothing, depth peel transparency, and align vertex centers features, see “Advanced Graphics Features” on page 1-8194.

`software` — Software OpenGL

`software`

Software OpenGL, specified as `software`.

To switch to software OpenGL:

- On Windows systems, execute `opengl software`.

- On Linux systems, start MATLAB with the `-softwareopengl` flag.
- Macintosh systems do not support software OpenGL.

Software OpenGL can be slower than hardware-accelerated OpenGL and does not support all graphics features. For a table of supported features, see "Advanced Graphics Features" on page 1-8194.

`hardware` — Hardware-accelerated OpenGL

`hardware`

Hardware-accelerated OpenGL, specified as `hardware`. All systems support using the `opengl hardware` command to switch from basic hardware to hardware OpenGL. However, only Windows systems support using the `opengl hardware` command to switch from software to hardware OpenGL. To switch from software to hardware on Linux systems, start MATLAB with the `-nosoftwareopengl` flag.

If your system automatically switched to using software OpenGL, then forcing your system to use hardware OpenGL can cause instabilities.

`hardwarebasic` — Basic version of hardware-accelerated OpenGL

`hardwarebasic`

Basic version of hardware-accelerated OpenGL, specified as `hardwarebasic`. This version of hardware-accelerated OpenGL uses your graphics hardware, but disables graphics features that are unstable with some graphics drivers. The disabled features might change in future releases as graphics features change and graphics hardware evolves. For a table of disabled features, see "Advanced Graphics Features" on page 1-8194.

`pref` — OpenGL version preference for future sessions

`'software' | 'hardware' | 'hardwarebasic' | 'none'`

OpenGL version preference for future sessions, specified as one of these options:

- `'software'` — Software OpenGL. This option is not available on Macintosh systems.
- `'hardware'` — Hardware-accelerated OpenGL.
- `'hardwarebasic'` — Hardware-accelerated OpenGL with some advanced graphics features disabled. For more information, see "Advanced Graphics Features" on page 1-8194.
- `'none'` — Default value for your system.

Definitions

Advanced Graphics Features

Advanced graphics features are features that require certain implementations of OpenGL. These features are graphics smoothing, depth peel transparency, align vertex centers, and hardware-accelerated markers. Support for these features depends on:

- Whether you are using hardware, basic hardware, or software OpenGL. To determine which implementation you are using, check the `HardwareSupportLevel` field returned by `opengl info`.
- The version of the OpenGL implementation. To determine the version in use, check the `Version` field returned by `opengl info`. To get the latest version available for your graphics hardware, upgrade your graphics drivers from your computer manufacturer website. For more information on upgrading graphics drivers, see "System Requirements for Graphics".

This table lists the advanced graphics features and the circumstances under which they are supported.

Graphics Feature	Hardware OpenGL	Basic Hardware OpenGL	Software OpenGL on Windows (Uses OpenGL 1.1)	Software OpenGL on Linux (Uses OpenGL 2.1)
Graphics Smoothing	Supported for OpenGL 2.1 or higher	Supported for OpenGL 2.1 or higher	Not supported	Not supported
Depth Peel Transparency	Supported for OpenGL 2.1 or higher	Disabled	Not supported	Supported
Align Vertex Centers	Supported for OpenGL 2.1 or higher	Disabled	Not supported	Not supported
Hardware-accelerated markers	Supported for OpenGL 4.0 or higher	Disabled	Not supported	Not supported

Graphics Smoothing

Graphics smoothing is a technique to improve the appearance of plots by reducing the appearance of jagged lines. By default, this feature is enabled if your system supports it.

This table shows the difference when the feature is enabled or disabled. To turn off this feature for a particular figure, set the GraphicsSmoothing property of the figure to `'off'`.

When Supported and Enabled	When Not Supported or Disabled
	
(Zoomed-in view) 	(Zoomed-in view) 

Depth Peel Transparency

Depth peel transparency is a feature for correctly drawing transparent 3-D objects or complex plots that contain intersecting transparent objects. In the table, the left image shows the result of using transparency on a sphere when the depth peel transparency feature is supported. The right image shows the same sphere with unexpected shaded areas that occur when the feature is not supported.

When Supported	When Not Supported
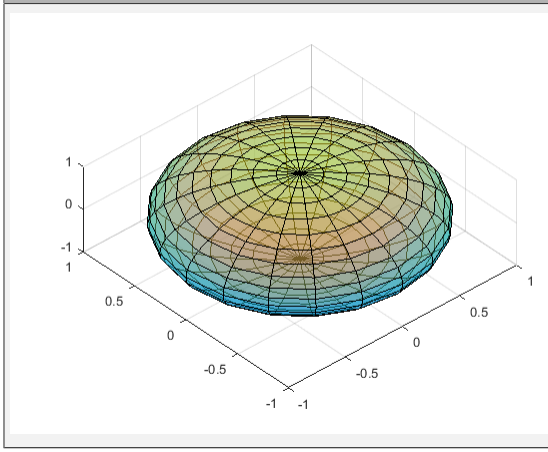	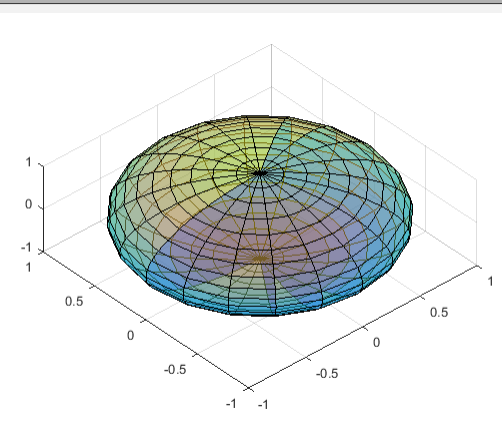

Align Vertex Centers

Align vertex centers is a feature for sharp vertical and horizontal lines. If graphics smoothing is enabled, it can cause horizontal and vertical lines to appear uneven in thickness or color. The align vertex centers feature eliminates the uneven appearance. By default, the align vertex centers feature is not enabled. However, if your system supports this feature, then you can turn it on for objects that have an `AlignVertexCenters` property by setting the property to `'on'`.

This table shows the difference when the feature is enabled or disabled.

When Supported and Enabled	When Not Supported or Disabled
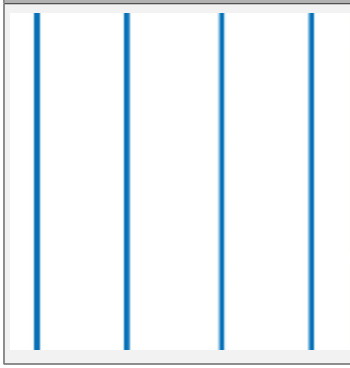	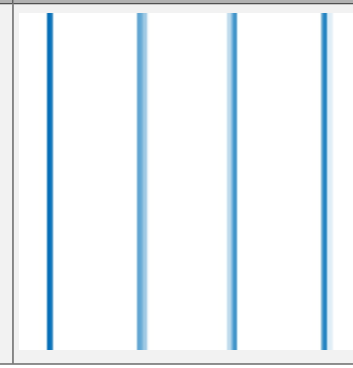

Hardware-Accelerated Markers

Hardware-accelerated markers take advantage of your graphics hardware for improved performance and quality. This table shows the difference when the feature is supported or not supported.

When Supported	When Not Supported

Tips

- Painters is an alternate rendering method for screen display and printing. For more information, see the figure's Renderer property.
- By default, MATLAB uses hardware-accelerated OpenGL if your graphics hardware supports it. However, in some cases, MATLAB automatically switches to software OpenGL, for example, if it detects:
  - You are using a graphics driver with known issues or graphics virtualization.
  - A previous MATLAB session crashed due to a graphics issue.
  - You do not have graphics hardware or your graphics hardware does not support hardware OpenGL.

See Also

See Also

`matlablinux` | `matlabmac` | `matlabwindows`

Topics

"System Requirements for Graphics"
"Resolving Low-Level Graphics Issues"

Introduced before R2006a

openvar

Open workspace variable in Variables editor or other graphical editing tool

Syntax

```
openvar(varname)
```

Description

`openvar(varname)` opens the workspace variable `varname`, in the Variables editor for graphical editing. Changes that you make to variables in the Variables editor occur in the workspace as soon as you enter them.

In some toolboxes, `openvar` opens a tool appropriate for viewing or editing objects indicated by `varname` instead of opening the Variables editor.

MATLAB does not impose any limitation on the size of a variable that you can open in the Variables editor. However, your operating system or the amount of physical memory installed on your computer can impose such limits.

Examples

Identify Outliers in a Linked Graph

Use data brushing to identify observations in a vector or matrix that might warrant further analysis.

Make a scatter plot of data in the sample MAT-file `count.dat`, and open the variable `count` in the Variables editor.

```
load count.dat
scatter(count(:,1),count(:,2))
openvar('count')
```

Right-click a cell in the Variables editor and select **Brushing** > **Brushing On**. This turns on data brushing in the Variables editor.

Select the rows 7, 8, and 20. (Select noncontiguous rows by holding down the **Ctrl** key and clicking in each row.)

count

24x3 double

	1	2	3	4	5
1	11	11	9		
2	7	13	11		
3	14	17	20		
4	11	13	9		
5	43	51	69		
6	38	46	76		
7	61	132	186		
8	75	135	180		
9	38	88	115		
10	28	36	55		
11	12	12	14		
12	18	27	30		
13	18	19	29		
14	17	15	18		
15	19	36	48		
16	32	47	10		
17	42	65	92		
18	57	66	151		
19	44	55	90		
20	114	145	257		
21	35	58	68		
22	11	12	15		
23	13	9	15		
24	10	9	7		
25					

In the Figure window with the scatter plot, click **Brush/Select Data** to enable data brushing, and **Link Plot** to enable data linking.

The data observations you brushed in the Variables editor appear highlighted in the scatter plot.

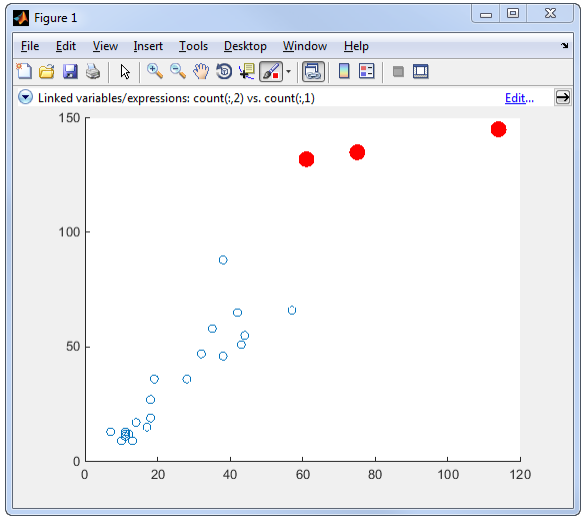

As long as data linking is enabled in the figure, observations that you brush in the scatter plot are highlighted in the Variables editor. When a figure is not linked to its data sources, you can still brush its graphs and you can brush the same data in the Variables editor, but only the display that you brush responds by highlighting.

Input Arguments

`varname` — Variable name

character vector

Variable name, specified as a character vector. The named variable can be an array, character vector, cell array, structure, or an object and its properties. If the named variable is a multidimensional array, then you can only view the array in the Variables editor, and not edit it.

Example: `'myVariable'`

Example: `'A'`

Tips

- As an alternative to the `openvar` function, double-click a variable in the Workspace browser.

See Also

See Also

`brush` | `linkdata` | `load` | `save` | `workspace`

Topics

"Create and Edit Variables"
"Making Graphs Responsive with Data Linking"

Introduced before R2006a

optimget

Optimization options values

Syntax

```
val = optimget(options,'param')
val = optimget(options,'param',default)
```

Description

`val = optimget(options,'param')` returns the value of the specified parameter in the optimization options structure `options`. You need to type only enough leading characters to define the parameter name uniquely. Case is ignored for parameter names.

`val = optimget(options,'param',default)` returns `default` if the specified parameter is not defined in the optimization options structure `options`. Note that this form of the function is used primarily by other optimization functions.

Examples

This statement returns the value of the `Display` optimization options parameter in the structure called `my_options`.

```
val = optimget(my_options,'Display')
```

This statement returns the value of the `Display` optimization options parameter in the structure called `my_options` (as in the previous example) except that if the `Display` parameter is not defined, it returns the value `'final'`.

```
optnew = optimget(my_options,'Display','final');
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

Input parameter names must be constant.

See Also

`optimset` | `fminbnd` | `fminsearch` | `fzero` | `lsqnonneg`

Introduced before R2006a

optimset

Create or edit optimization options structure

Syntax

```
options = optimset('param1',value1,'param2',value2,...)
optimset
options = optimset
options = optimset(optimfun)
options = optimset(oldopts,'param1',value1,...)
options = optimset(oldopts,newopts)
```

Description

The function `optimset` creates an `options` structure that you can pass as an input argument to the following four MATLAB optimization functions:

- `fminbnd`
- `fminsearch`
- `fzero`
- `lsqnonneg`

You can use the `options` structure to change the default parameters for these functions.

Note If you have an Optimization Toolbox license, you can also use `optimset` to create an expanded `options` structure containing additional options specifically designed for the functions provided in that toolbox. For more information about these additional options, see the reference page for the enhanced Optimization Toolbox `optimset` function.

`options = optimset('param1',value1,'param2',value2,...)` creates an optimization options structure called `options`, in which the specified parameters (`param`) have specified values. Any unspecified parameters are set to `[]` (parameters with value `[]` indicate to use the default value for that parameter when `options`

is passed to the optimization function). It is sufficient to type only enough leading characters to define the parameter name uniquely. Case is ignored for parameter names.

`optimset` with no input or output arguments displays a complete list of parameters with their valid values.

`options = optimset` (with no input arguments) creates an options structure `options` where all fields are set to `[]`.

`options = optimset(optimfun)` creates an options structure `options` with all parameter names and default values relevant to the optimization function `optimfun`.

`options = optimset(oldopts,'param1',value1,...)` creates a copy of `oldopts`, modifying the specified parameters with the specified values.

`options = optimset(oldopts,newopts)` combines an existing options structure `oldopts` with a new options structure `newopts`. Any parameters in `newopts` with nonempty values overwrite the corresponding old parameters in `oldopts`.

Options

The following table lists the available options for the MATLAB optimization functions.

Option	Value	Description	Solvers
`Display`	`'off'` | `'iter'` | {`'final'`} | `'notify'`	Level of display. `'off'` displays no output; `'iter'` displays output at each iteration (not available for `lsqnonneg`); `'final'` displays just the final output; `'notify'` displays output only if the function does not converge.	`fminbnd`, `fminsearch`,`fzero`, `lsqnonneg`
`FunValChec`	{`'off'`} | `'on'`	Check whether objective function values are valid. `'on'` displays an error when the objective function returns a value that is `complex` or `NaN`. `'off'` displays no error.	`fminbnd`, `fminsearch`,`fzero`

Option	Value	Description	Solvers
`MaxFunEval`	positive integer	Maximum number of function evaluations allowed.	`fminbnd`, `fminsearch`
`MaxIter`	positive integer	Maximum number of iterations allowed.	`fminbnd`, `fminsearch`
`OutputFcn`	function | {[ ]}	User-defined function that an optimization function calls at each iteration. See "Output Functions".	`fminbnd`, `fminsearch`,`fzero`
`PlotFcns`	function | {[ ]}	User-defined or built-in plot function that an optimization function calls at each iteration. Built-in functions: • `@optimplotx` plots the current point • `@optimplotfval` plots the function value • `@optimplotfunccount` plots the function count (not available for `fzero`) See "Plot Functions".	`fminbnd`, `fminsearch`,`fzero`
`TolFun`	positive scalar	Termination tolerance on the function value. See "Tolerances and Stopping Criteria".	`fminsearch`
`TolX`	positive scalar	Termination tolerance on *x*, the current point. See "Tolerances and Stopping Criteria".	`fminbnd`, `fminsearch`,`fzero`, `lsqnonneg`

Examples

This statement creates an optimization options structure called `options` in which the `Display` parameter is set to `'iter'` and the `TolFun` parameter is set to `1e-8`.

```
options = optimset('Display','iter','TolFun',1e-8)
```

This statement makes a copy of the options structure called `options`, changing the value of the `TolX` parameter and storing new values in `optnew`.

```
optnew = optimset(options,'TolX',1e-4);
```

This statement returns an optimization options structure that contains all the parameter names and default values relevant to the function `fminbnd`.

```
optimset('fminbnd')
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not support the syntax that has no input or output arguments:

  ```
  optimset
  ```

- Functions specified in the `options` must be supported for code generation.
- The input argument `optimfun` must be a function that is supported for code generation.
- The fields of the options structure `oldopts` must be fixed-size fields.
- Code generation ignores the `Display` option.
- Code generation does not support the additional options in an options structure created by the Optimization Toolbox `optimset` function. If an input options structure includes the additional Optimization Toolbox options, then the output structure does not include them.

See Also

`optimset` | `optimget` | `fminbnd` | `fminsearch` | `fzero` | `lsqnonneg`

Introduced before R2006a

or, |

Find logical OR

Syntax

```
A | B
or(A,B)
```

Description

`A | B` performs a logical OR of arrays `A` and `B` and returns an array containing elements set to either logical 1 (`true`) or logical 0 (`false`). An element of the output array is set to logical 1 (`true`) if either `A` or `B` contain a nonzero element at that same array location. Otherwise, the array element is set to 0.

`or(A,B)` is an alternate way to execute `A | B`, but is rarely used. It enables operator overloading for classes.

Examples

Locate Zeros in Matrices

Find the logical OR of two matrices. The result contains logical `1` (`true`) where either matrix contains a nonzero value. The zeros in the result indicate spots where both arrays have a value of zero.

```
A = [5 7 0; 0 2 9; 5 0 0]
```

```
A =

     5     7     0
     0     2     9
     5     0     0
```

```
B = [6 6 0; 1 3 5; -1 0 0]
```

```
B =
```

```
     6     6     0
     1     3     5
    -1     0     0
```

```
A | B
```

```
ans = 3×3 logical array
   1   1   0
   1   1   1
   1   0   0
```

Truth Table for Logical OR

Create a truth table for `or`.

```
A = [true false]
```

```
A = 1×2 logical array
   1   0
```

```
B = [true; false]
```

```
B = 2×1 logical array
   1
   0
```

```
C = A|B
```

```
C = 2×2 logical array
   1   1
   1   0
```

Input Arguments

A — Left operand

scalar | vector | matrix | multidimensional array

Left operand, specified as a scalar, vector, matrix, or multidimensional array. Inputs A and B must either be the same size or have sizes that are compatible (for example, A

is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

B — Right operand
scalar | vector | matrix | multidimensional array

Right operand, specified as a scalar, vector, matrix, or multidimensional array. Inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Tips

- You can chain together several logical operations, for example, `A & B | C`.
- The symbols `|` and `||` perform different operations in a MATLAB application. The element-wise OR operator described here is `|`. The short-circuit OR operator is `||`. See `Logical Operators: Short Circuit` for more information.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`all` | `and` | `any` | `bitor` | `not` | `xor`

Topics

"Truth Table for Logical Operations"
"MATLAB Operators and Special Characters"

Introduced before R2006a

ordeig

Eigenvalues of quasitriangular matrices

Syntax

```
E = ordeig(T)
E = ordeig(AA,BB)
```

Description

`E = ordeig(T)` takes a quasitriangular Schur matrix `T`, typically produced by `schur`, and returns the vector `E` of eigenvalues in their order of appearance down the diagonal of T.

`E = ordeig(AA,BB)` takes a quasitriangular matrix pair `AA` and `BB`, typically produced by `qz`, and returns the generalized eigenvalues in their order of appearance down the diagonal of `AA-λ*BB`.

`ordeig` is an order-preserving version of `eig` for use with `ordschur` and `ordqz`. It is also faster than `eig` for quasitriangular matrices.

Examples

Example 1

```
T=diag([1 -1 3 -5 2]);
```

`ordeig(T)` returns the eigenvalues of `T` in the same order they appear on the diagonal.

```
ordeig(T)

ans =

     1
    -1
     3
```

```
    -5
     2
```

`eig(T)`, on the other hand, returns the eigenvalues in order of increasing magnitude.

```
eig(T)

ans =

    -5
    -1
     1
     2
     3
```

Example 2

```
A = rand(10);
[U, T] = schur(A);
abs(ordeig(T))

ans =

    5.3786
    0.7564
    0.7564
    0.7802
    0.7080
    0.7080
    0.5855
    0.5855
    0.1445
    0.0812
% Move eigenvalues with magnitude < 0.5 to the
% upper-left corner of T.
[U,T] = ordschur(U,T,abs(E)<0.5);
abs(ordeig(T))

ans =

    0.1445
    0.0812
    5.3786
    0.7564
```

```
    0.7564
    0.7802
    0.7080
    0.7080
    0.5855
    0.5855
```

See Also

`schur` | `qz` | `ordschur` | `ordqz` | `eig`

Introduced before R2006a

orderfields

Order fields of structure array

Syntax

```
s = orderfields(s1)
s = orderfields(s1, s2)
s = orderfields(s1, c)
s = orderfields(s1, perm)
[s, perm] = orderfields(...)
```

Description

`s = orderfields(s1)` orders the fields in `s1` so that the new structure array `s` has field names in ASCII dictionary order.

`s = orderfields(s1, s2)` orders the fields in `s1` so that the new structure array `s` has field names in the same order as those in `s2`. Structures `sl` and `s2` must have the same fields.

`s = orderfields(s1, c)` orders the fields in `s1` so that the new structure array `s` has field names in the same order as the names in the cell array `c`. Structure `s1` and cell array `c` must contain the same field names.

`s = orderfields(s1, perm)` orders the fields in `s1` so that the new structure array `s` has field names in the order specified by the indices in permutation vector `perm`.

If `s1` has `N` fieldnames, the elements of `perm` must be an arrangement of the numbers from `1` to `N`. This is particularly useful if you have more than one structure array that you would like to reorder in the same way.

`[s, perm] = orderfields(...)` returns a permutation vector representing the change in order performed on the fields of the structure array that results in `s`.

Examples

Create a structure `s`. Then create a new structure from `s`, but with the fields ordered alphabetically:

```
s = struct('b', 2, 'c', 3, 'a', 1)
s =
    b: 2
    c: 3
    a: 1

snew = orderfields(s)
snew =
    a: 1
    b: 2
    c: 3
```

Arrange the fields of `s` in the order specified by the second (cell array) argument of `orderfields`. Return the new structure in `snew` and the permutation vector used to create it in `perm`:

```
[snew, perm] = orderfields(s, {'b', 'a', 'c'})
snew =
    b: 2
    a: 1
    c: 3
perm =
     1
     3
     2
```

Now create a new structure, `s2`, having the same fieldnames as `s`. Reorder the fields using the permutation vector returned in the previous operation:

```
s2 = struct('b', 3, 'c', 7, 'a', 4)
s2 =
    b: 3
    c: 7
    a: 4

snew = orderfields(s2, perm)
snew =
    b: 3
    a: 4
```

```
c: 7
```

Tips

`orderfields` only orders top-level fields. It is not recursive.

See Also

See Also

`cell2struct` | `fieldnames` | `getfield` | `isfield` | `rmfield` | `setfield` | `struct` | `struct2cell`

Topics

dynamic field names

Introduced before R2006a

ordqz

Reorder eigenvalues in QZ factorization

Syntax

```
[AAS,BBS,QS,ZS] = ordqz(AA,BB,Q,Z,select)
[...] = ordqz(AA,BB,Q,Z,keyword)
[...] = ordqz(AA,BB,Q,Z,clusters)
```

Description

`[AAS,BBS,QS,ZS] = ordqz(AA,BB,Q,Z,select)` reorders the QZ factorizations `Q*A*Z = AA` and `Q*B*Z = BB` produced by the `qz` function for a matrix pair `(A,B)`. It returns the reordered pair `(AAS,BBS)` and the cumulative orthogonal transformations `QS` and `ZS` such that `QS*A*ZS = AAS` and `QS*B*ZS = BBS`. In this reordering, the selected cluster of eigenvalues appears in the leading (upper left) diagonal blocks of the quasitriangular pair `(AAS,BBS)`, and the corresponding invariant subspace is spanned by the leading columns of `ZS`. The logical vector `select` specifies the selected cluster as `E(select)` where `E` is the vector of eigenvalues as they appear along the diagonal of `AA-λ*BB`.

Note To extract `E` from `AA` and `BB`, use `ordeig(BB)`, instead of `eig`. This ensures that the eigenvalues in `E` occur in the same order as they appear on the diagonal of `AA-λ*BB`.

`[...] = ordqz(AA,BB,Q,Z,keyword)` sets the selected cluster to include all eigenvalues in the region specified by `keyword`:

keyword	Selected Region
`'lhp'`	Left-half plane (`real(E) < 0`)
`'rhp'`	Right-half plane (`real(E) > 0`)
`'udi'`	Interior of unit disk (`abs(E) < 1`)
`'udo'`	Exterior of unit disk (`abs(E) > 1`)

`[...] = ordqz(AA,BB,Q,Z,clusters)` reorders multiple clusters at once. Given a vector `clusters` of cluster indices commensurate with `E = ordeig(AA,BB)`, such that all eigenvalues with the same `clusters` value form one cluster, `ordqz` sorts the specified clusters in descending order along the diagonal of `(AAS,BBS)`. The cluster with highest index appears in the upper left corner.

See Also

`ordeig` | `ordschur` | `qz`

Introduced before R2006a

ordschur

Reorder eigenvalues in Schur factorization

Syntax

```
[US,TS] = ordschur(U,T,select)
[US,TS] = ordschur(U,T,keyword)
[US,TS] = ordschur(U,T,clusters)
```

Description

`[US,TS] = ordschur(U,T,select)` reorders the Schur factorization `X = U*T*U'` produced by the `schur` function and returns the reordered Schur matrix `TS` and the cumulative orthogonal transformation `US` such that `X = US*TS*US'`. In this reordering, the selected cluster of eigenvalues appears in the leading (upper left) diagonal blocks of the quasitriangular Schur matrix `TS`, and the corresponding invariant subspace is spanned by the leading columns of `US`. The logical vector `select` specifies the selected cluster as `E(select)` where `E` is the vector of eigenvalues as they appear along `T`'s diagonal.

Note To extract `E` from `T`, use `E = ordeig(T)`, instead of `eig`. This ensures that the eigenvalues in `E` occur in the same order as they appear on the diagonal of `TS`.

`[US,TS] = ordschur(U,T,keyword)` sets the selected cluster to include all eigenvalues in one of the following regions:

keyword	Selected Region
`'lhp'`	Left-half plane (`real(E) < 0`)
`'rhp'`	Right-half plane (`real(E) > 0`)
`'udi'`	Interior of unit disk (`abs(E) < 1`)
`'udo'`	Exterior of unit disk (`abs(E) > 1`)

`[US,TS] = ordschur(U,T,clusters)` reorders multiple clusters at once. Given a vector `clusters` of cluster indices, commensurate with `E = ordeig(T)`, and such that all eigenvalues with the same `clusters` value form one cluster, `ordschur` sorts the specified clusters in descending order along the diagonal of `TS`, the cluster with highest index appearing in the upper left corner.

See Also

`ordeig` | `ordqz` | `schur`

Introduced before R2006a

orient

Paper orientation for printing or saving

Syntax

```
orient ornt
orient(fig,ornt)
```

```
or = orient
or = orient(fig)
```

Description

`orient ornt` specifies the paper orientation to use when printing or saving the current figure to a paged format, such as PDF. Specify the orientation as either `portrait`, `landscape`, or `tall`. Figure property values related to printing, such as the `PaperPositionMode` value, affect the behavior.

`orient(fig,ornt)` sets the paper orientation for the figure or Simulink model specified by `fig`. Use single quotes around the orientation option, such as `'portrait'`.

`or = orient` returns the paper orientation value for the current figure as either `'portrait'`, `'landscape'`, or `'tall'`.

`or = orient(fig)` returns the paper orientation value for the figure or Simulink model specified by `fig`.

Examples

Set Landscape Orientation with Current Figure Size

Create a figure with a surface plot and save the figure to a PDF format. Save the figure with the same size that it appears on screen and use a landscape orientation for the page.

```
fig = figure;
surf(peaks)
orient(fig,'landscape')
```

```
print(fig,'LandscapePage.pdf','-dpdf')
```

Set Landscape Orientation with Expanded Figure Size

Create a figure with a surface plot and save the figure to a PDF format. Use landscape orientation for the page and expand the figure size to fill page.

```
fig = figure;
surf(peaks)
fig.PaperPositionMode = 'manual';
orient(fig,'landscape')
print(fig,'LandscapePage_ExpandedFigure.pdf','-dpdf')
```

Return Current Paper Orientation Value

Create a surface plot. Return the current paper orientation value for the figure.

```
figure
surf(peaks)
or = orient
```

```
or =

    'portrait'
```

Input Arguments

`ornt` — Paper orientation
`portrait` (default) | `landscape` | `tall`

Paper orientation, specified as one of the values in this table.

Value	Description
`landscape`	Landscape orientation. Set the PaperOrientation property to `'landscape'`. • If the PaperPositionMode property of the figure is set to `'auto'` (the default), then print or save the figure using the size of the figure on the screen. • If the `PaperPositionMode` property of the figure is set to `'manual'`, then

Value	Description
	resize the figure to fit across the entire page with a 0.25-inch margin. Set the PaperPosition property accordingly.
`tall`	Tall portrait orientation. Set the `PaperOrientation` property to `'portrait'` and resize the figure to fit across the entire page with a 0.25-inch margin. Set the `PaperPosition` property accordingly.
`portrait`	Portrait orientation. Set the `PaperOrientation` property to `'portrait'`. • If the `PaperPositionMode` property of the figure is set to `'auto'`, then print or save the figure using the size of the figure on the screen. • If the `PaperPositionMode` property is `'manual'`, then set the `PaperPosition` property based on the default `PaperType` and `PaperOrientation` values. For details, see Effect of Default Values on `portrait` option.

Effect of Default Values on `portrait` Option

The default PaperType and PaperOrientation properties affect the result of the `portrait` option in these ways.

Default Versus Current Figure `PaperType` Value	Default `PaperOrientation` Value	Current Figure `PaperOrientation` Value	Result
Same value	`'portrait'`	Not applicable	Position the figure on the page

Default Versus Current Figure `PaperType` Value	Default `PaperOrientation` Value	Current Figure `PaperOrientation` Value	Result
			using the default `PaperPosition` value for figures. In inches, it typically is `[0.25 2.5 8 6]`.
Same value	`'landscape'`	Not applicable	Position the figure on the page using the reverse of the default `PaperPosition` value for figures. In inches, it typically is `[2.5 0.25 6 8]`.
Different values	Not applicable	`'portrait'`	Position the figure on the page using the current `PaperPosition` value for the figure.
Different values	Not applicable	`'landscape'`	Position the figure on the page using the reverse of the current `PaperPosition` value for the figure, such as`[y x height width]`.

`fig` — Target figure or Simulink model

figure object | Simulink model

Target figure or Simulink model, specified as a figure object or Simulink model. If you do not specify the figure or model, then `orient` uses the current figure.

See Also

See Also

`print` | `printpreview`

Introduced before R2006a

orth

Orthonormal basis for range of matrix

Syntax

```
Q = orth(A)
```

Description

`Q = orth(A)` returns an orthonormal basis for the range of `A`. The columns of `Q` are vectors, which span the range of `A`. The number of columns in `Q` is equal to the rank of `A`.

Examples

Basis for Full Rank Matrix

Calculate and verify the orthonormal basis vectors for the range of a full rank matrix.

Define a matrix and find the rank.

```
A = [1 0 1;-1 -2 0; 0 1 -1];
r = rank(A)
```

```
r = 3
```

Since `A` is a square matrix of full rank, the orthonormal basis calculated by `orth(A)` matches the matrix `U` calculated in the singular value decomposition, `[U,S] = svd(A,'econ')`. This is because the singular values of `A` are all nonzero.

Calculate the orthonormal basis for the range of `A` using `orth`.

```
Q = orth(A)
```

```
Q =

   -0.1200   -0.8097    0.5744
```

```
    0.9018    0.1531    0.4042
   -0.4153    0.5665    0.7118
```

The number of columns in `Q` is equal to `rank(A)`. Since `A` is of full rank, `Q` and `A` are the same size.

Verify that the basis, `Q`, is orthogonal and normalized within a reasonable error range.

```
E = norm(eye(r)-Q'*Q,'fro')
```

```
E = 9.6228e-16
```

The error is on the order of `eps`.

Basis for Rank Deficient Matrix

Calculate and verify the orthonormal basis vectors for the range of a rank deficient matrix.

Define a singular matrix and find the rank.

```
A = [1 0 1; 0 1 0; 1 0 1];
r = rank(A)
```

```
r = 2
```

Since `A` is rank deficient, the orthonormal basis calculated by `orth(A)` matches only the first `r = 2` columns of matrix `U` calculated in the singular value decomposition, `[U,S] = svd(A,'econ')`. This is because the singular values of `A` are *not* all nonzero.

Calculate the orthonormal basis for the range of `A` using `orth`.

```
Q = orth(A)
```

```
Q =

   -0.7071         0
         0    1.0000
   -0.7071         0
```

Since `A` is rank deficient, `Q` contains one fewer column than `A`.

Input Arguments

A — Input matrix
scalar | vector | matrix

Input matrix, specified as a scalar, vector, or matrix.

Data Types: `single` | `double`
Complex Number Support: Yes

Definitions

Range

The column space, or *range*, of a matrix `A` is the collection of all linear combinations of the columns of `A`. Any vector, `b`, that is a solution to the linear equation, `A*x = b`, is included in the range of `A` since you can also write it as a linear combination of the columns of `A`.

Rank

The `rank` of a matrix is equal to the dimension of the range.

Algorithms

`orth` is obtained from `U` in the singular value decomposition, `[U,S] = svd(A,'econ')`. If `r = rank(A)`, the first `r` columns of `U` form an orthonormal basis for the range of `A`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generated code can return a different basis than MATLAB returns.

See Also

See Also

`null` | `rank` | `svd`

Introduced before R2006a

outerjoin

Outer join between two tables or timetables

Syntax

```
C = outerjoin(A,B)
C = outerjoin(A,B,Name,Value)
[C,ia,ib] = outerjoin( ___ )
```

Description

`C = outerjoin(A,B)` creates the table or timetable, `C`, as the outer join between `A` and `B` by matching up rows using all the variables with the same name as key variables. You can perform outer joins only on certain combinations of tables and timetables.

- If `A` is a table, then `B` must be a table. `outerjoin` returns `C` as a table.
- If `A` is a timetable, then `B` can be either a table or a timetable. `outerjoin` returns `C` as a timetable for either combination of inputs.

The outer join includes the rows that match between `A` and `B`, and also unmatched rows from either `A` or `B`, all with respect to the key variables. `C` contains all variables from both `A` and `B`, including the key variables.

The row labels of `A` and `B` can be key variables. Row labels are the row names of a table, or the row times of a timetable.

`C = outerjoin(A,B,Name,Value)` performs the outer-join operation with additional options specified by one or more `Name,Value` pair arguments.

`[C,ia,ib] = outerjoin( ___ )` also returns index vectors, `ia` and `ib`, indicating the correspondence between rows in `C` and those in `A` and `B` respectively. You can use this syntax with any of the input arguments in the previous syntaxes.

Examples

Outer-Join Operation of Tables with One Variable in Common

Create a table, A.

```
A = table([5;12;23;2;15;6],...
    {'cheerios';'pizza';'salmon';'oreos';'lobster';'pizza'},...
    'VariableNames',{'Age','FavoriteFood'},...
    'RowNames',{'Amy','Bobby','Holly','Harry','Marty','Sally'})
```

```
A = 6×2 table
             Age    FavoriteFood
             ___    ____________

    Amy       5     'cheerios'
    Bobby    12     'pizza'
    Holly    23     'salmon'
    Harry     2     'oreos'
    Marty    15     'lobster'
    Sally     6     'pizza'
```

Create a table, B, with one variable in common with A, called `FavoriteFood`.

```
B = table({'cheerios';'oreos';'pizza';'salmon';'cake'},...
    [110;160;140;367;243],...
    {'A-';'D';'B';'B';'C-'},...
    'VariableNames',{'FavoriteFood','Calories','NutritionGrade'})
```

```
B = 5×3 table
    FavoriteFood    Calories    NutritionGrade
    ____________    ________    ______________

    'cheerios'      110         'A-'
    'oreos'         160         'D'
    'pizza'         140         'B'
    'salmon'        367         'B'
    'cake'          243         'C-'
```

Use the `outerjoin` function to create a new table, C, with data from tables A and B.

```
C = outerjoin(A,B)
```

```
C = 7×5 table
    Age    FavoriteFood_A    FavoriteFood_B    Calories    NutritionGrade
    ___    ______________    ______________    ________    ______________

    NaN    ''                'cake'            243         'C-'
      5    'cheerios'        'cheerios'        110         'A-'
     15    'lobster'         ''                NaN         ''
      2    'oreos'           'oreos'           160         'D'
     12    'pizza'           'pizza'           140         'B'
      6    'pizza'           'pizza'           140         'B'
     23    'salmon'          'salmon'          367         'B'
```

Table C contains a separate variable for the key variable from A, called FavoriteFood_A, and the key variable from B, called FavoriteFood_B.

Merge Key Variable Pair to Single Variable

Create a table, A.

```
A = table({'a' 'b' 'c' 'e' 'h'}',[1 2 3 11 17]',...
    'VariableNames',{'Key1' 'Var1'})
```

```
A = 5×2 table
    Key1    Var1
    ____    ____

    'a'      1
    'b'      2
    'c'      3
    'e'     11
    'h'     17
```

Create a table, B, with common values in the variable Key1 between tables A and B, but also containing rows with values of Key1 not present in A.

```
B = table({'a','b','d','e'}',[4;5;6;7],...
    'VariableNames',{'Key1' 'Var2'})
```

```
B = 4×2 table
    Key1    Var2
    ____    ____
```

```
    'a'      4
    'b'      5
    'd'      6
    'e'      7
```

Use the `outerjoin` function to create a new table, `C`, with data from tables `A` and `B`. Merge the key values into a single variable in the output table, `C`.

```
C = outerjoin(A,B,'MergeKeys',true)
```

```
C = 6×3 table
    Key1    Var1    Var2
    ____    ____    ____

    'a'       1       4
    'b'       2       5
    'c'       3     NaN
    'd'     NaN       6
    'e'      11       7
    'h'      17     NaN
```

Variables in table `C` that came from `A` contain null values in the rows that have no match from `B`. Similarly, variables in `C` that came from `B` contain null values in those rows that had no match from `A`.

Outer-Join Operation of Tables and Indices to Values

Create a table, `A`.

```
A = table({'a' 'b' 'c' 'e' 'h'}',[1 2 3 11 17]',...
    'VariableNames',{'Key1' 'Var1'})
```

```
A = 5×2 table
    Key1    Var1
    ____    ____

    'a'      1
    'b'      2
    'c'      3
    'e'     11
```

```
    'h'      17
```

Create a table, B, with common values in the variable Key1 between tables A and B, but also containing rows with values of Key1 not present in A.

```
B = table({'a','b','d','e'}',[4;5;6;7],...
    'VariableNames',{'Key1' 'Var2'})
```

```
B = 4×2 table
    Key1    Var2
    ____    ____

    'a'     4
    'b'     5
    'd'     6
    'e'     7
```

Use the outerjoin function to create a new table, C, with data from tables A and B. Match up rows with common values in the key variable, Key1, but also retain rows whose key values don't have a match.

Also, return index vectors, ia and ib indicating the correspondence between rows in C and rows in A and B respectively.

```
[C,ia,ib] = outerjoin(A,B)
```

```
C = 6×4 table
    Key1_A    Var1    Key1_B    Var2
    ______    ____    ______    ____

    'a'         1     'a'         4
    'b'         2     'b'         5
    'c'         3     ''        NaN
    ''        NaN     'd'         6
    'e'        11     'e'         7
    'h'        17     ''        NaN


ia =

     1
     2
```

```
     3
     0
     4
     5


ib =

     1
     2
     0
     3
     4
     0
```

The index vectors `ia` and `ib` contain zeros to indicate the rows in table `C` that do not correspond to rows in tables `A` or `B`, respectively.

Left Outer-Join Operation of Tables and Indices to Values

Create a table, `A`.

```
A = table({'a' 'b' 'c' 'e' 'h'}',[1 2 3 11 17]',...
    'VariableNames',{'Key1' 'Var1'})
```

```
A = 5×2 table
    Key1    Var1
    ____    ____

    'a'      1
    'b'      2
    'c'      3
    'e'     11
    'h'     17
```

Create a table, `B`, with common values in the variable `Key1` between tables `A` and `B`, but also containing rows with values of `Key1` not present in `A`.

```
B = table({'a','b','d','e'}',[4;5;6;7],...
    'VariableNames',{'Key1' 'Var2'})
```

```
B = 4×2 table
```

```
    Key1    Var2
    ____    ____

    'a'     4
    'b'     5
    'd'     6
    'e'     7
```

Use the `outerjoin` function to create a new table, `C`, with data from tables `A` and `B`. Ignore rows in `B` whose key values do not match any rows in `A`.

Also, return index vectors, `ia` and `ib` indicating the correspondence between rows in `C` and rows in `A` and `B` respectively.

```
[C,ia,ib] = outerjoin(A,B,'Type','left')
```

```
C = 5×4 table
    Key1_A    Var1    Key1_B    Var2
    ______    ____    ______    ____

    'a'        1      'a'         4
    'b'        2      'b'         5
    'c'        3      ''        NaN
    'e'       11      'e'         7
    'h'       17      ''        NaN


ia =

     1
     2
     3
     4
     5


ib =

     1
     2
     0
     4
     0
```

All values of `ia` are nonzero indicating that all rows in `C` have corresponding rows in `A`.

Outer-Join Operation of Timetables

Create two timetables, `A` and `B`. They have some row times in common, but each also includes row times that are not in the other timetable.

```
A = timetable(seconds([1;2;4;6]),[1 2 3 11]')
```

```
A = 4×1 timetable
     Time    Var1
    _____    ____

    1 sec     1
    2 sec     2
    4 sec     3
    6 sec    11
```

```
B = timetable(seconds([2;4;6;7]),[4 5 6 7]')
```

```
B = 4×1 timetable
     Time    Var1
    _____    ____

    2 sec    4
    4 sec    5
    6 sec    6
    7 sec    7
```

Combine `A` and `B` with an outer join. `C` matches up the rows with common row times, but also includes the rows that do not have matches.

```
C = outerjoin(A,B)
```

```
C = 5×2 timetable
     Time    Var1_A    Var1_B
    _____    ______    ______

    1 sec      1       NaN
    2 sec      2         4
    4 sec      3         5
    6 sec     11         6
```

```
    7 sec    NaN         7
```

Combine A and B, but ignore rows in B whose row times do not match any row times in A.

```
D = outerjoin(A,B,'Type','left')
```

```
D = 4×2 timetable
     Time    Var1_A    Var1_B
    _____    ______    ______

    1 sec     1        NaN
    2 sec     2          4
    4 sec     3          5
    6 sec    11          6
```

Input Arguments

A,B — Input tables

tables | timetables

Input tables, specified as tables or as timetables.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Keys',2` uses the second variable in A and the second variable in B as key variables.

'Keys' — Variables to use as keys

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables to use as keys, specified as the comma-separated pair consisting of `'Keys'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You cannot use the `'Keys'` name-value pair argument with the `'LeftKeys'` and `'RightKeys'` name-value pair arguments.

Row labels can be keys, alone or in combination with other key variables. For more information, see the "Tips" on page 1-8245 section.

Example: `'Keys',[1 3]` uses the first and third variables in `A` and `B` as a key variables.

`'LeftKeys'` — Variables to use as keys in `A`

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables to use as keys in `A`, specified as the comma-separated pair consisting of `'LeftKeys'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You must use the `'LeftKeys'` name-value pair argument in conjunction with the `'RightKeys'` name-value pair argument. `'LeftKeys'` and `'RightKeys'` both must specify the same number of key variables. `outerjoin` pairs key values based on their order.

Row labels can be keys, alone or in combination with other key variables. For more information, see the "Tips" on page 1-8245 section.

Example: `'LeftKeys',1` uses only the first variable in `A` as a key variable.

`'RightKeys'` — Variables to use as keys in `B`

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables to use as keys in `B`, specified as the comma-separated pair consisting of `'RightKeys'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You must use the `'RightKeys'` name-value pair argument in conjunction with the `'LeftKeys'` name-value pair argument. `'LeftKeys'` and `'RightKeys'` both must specify the same number of key variables. `outerjoin` pairs key values based on their order.

Row labels can be keys, alone or in combination with other key variables. For more information, see the "Tips" on page 1-8245 section.

Example: `'RightKeys',3` uses only the third variable in `B` as a key variable.

'MergeKeys' — Merge keys flag

false (default) | true | 0 | 1

Merge keys flag, specified as the comma-separated pair consisting of 'MergeKeys' and either false, true, 0 or 1.

false	outerjoin includes two separate variables in the output table, C, for each key variable pair from tables A and B. This is the default behavior.
true	outerjoin includes a single variable in the output table, C, for each key variable pair from tables A and B. outerjoin creates the single variable by merging the key values from A and B, taking values from A where a corresponding row exists in A, and taking values from B otherwise. • If you specify 'LeftVariables' or 'RightVariables' to include only one key from a key variable pair, then outerjoin includes the merged key—containing values from both key variables—in the output table. • If you specify 'LeftVariables' and 'RightVariables' to exclude both keys from a key variable pair, then outerjoin does not include the merged key variable in the output table.

'LeftVariables' — Variables from A to include in C

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables from A to include in C, specified as the comma-separated pair consisting of 'LeftVariables' and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You can use 'LeftVariables' to include or exclude key variables as well as nonkey variables from the output, C.

By default, outerjoin includes all variables from A.

'RightVariables' — Variables from B to include in C

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables from B to include in C, specified as the comma-separated pair consisting of 'RightVariables' and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

You can use 'RightVariables' to include or exclude key variables as well as nonkey variables from the output, C.

By default, outerjoin includes all the variables from B.

'Type' — Type of outer join operation
'full' (default) | 'left' | 'right'

Type of outer-join operation, specified as the comma-separated pair consisting of 'Type' and either 'full', 'left', or 'right'.

- For a left outer join, C contains rows corresponding to key values in A that do not match any values in B, but not vice-versa.
- For a right outer join, C contains rows corresponding to key values in B that do not match any values in A, but not vice-versa.

By default, outerjoin does a full outer join and includes unmatched rows from both A and B.

Output Arguments

C — Outer join from A and B
table

Outer join from A and B, returned as a table. The output table, C, contains one row for each pair of rows in tables A and B that share the same combination of key values. If A and B contain variables with the same name, outerjoin adds a unique suffix to the corresponding variable names in C. Variables in C that came from A contain null values in those rows that had no match from B. Similarly, variables in C that came from B contain null values in those rows that had no match from A.

In general, if there are m rows in table A and n rows in table B that all contain the same combination of values in the key variables, table C contains m*n rows for that combination. C also contains rows corresponding to key value combinations in one input table that do not match any row the other input table.

C contains the horizontal concatenation of A(ia,LeftVars) and B(ib,RightVars) sorted by the values in the key variables. By default, LeftVars consists of all the variables of A, and RightVars consists of all the from B. Otherwise, LeftVars consists of the variables specified by the 'LeftVariables' name-value pair argument, and RightVars consists of the variables specified by the 'RightVariables' name-value pair argument.

You can store additional metadata such as descriptions, variable units, variable names, and row names in the table. For more information, see Table Properties.

ia — Index to A
column vector

Index to A, returned as a column vector. Each element of ia identifies the row in table A that corresponds to that row in the output table, C. The vector ia contains zeros to indicate the rows in C that do not correspond to rows in A.

ib — Index to B
column vector

Index to B, returned as a column vector. Each element of ib identifies the row in table B that corresponds to that row in the output table, C. The vector ib contains zeros to indicate the rows in C that do not correspond to rows in B.

Definitions

Key Variable

Variable used to match and combine data between the input tables, A and B.

Tips

Row labels from the input tables A and B can be keys, alone or in combination with other key variables. Row labels are the row names of a table or the row times of a timetable. In general, outerjoin copies row labels from the input table A to the output table C.

- If A has no row labels, then C has no row labels.
- If A has row labels, then outerjoin copies row labels from A to create row labels in C.

- If you specify row labels from both `A` and `B` as a key pair, then `outerjoin` merges row labels from `B` into row labels of `C` where needed.
- If you specify row labels of `A` as a key, but do not specify row labels of `B` as the matching key, then `outerjoin` creates default row labels in `C` where needed.
- If both `A` and `B` are tables, but you do not specify either input table's row names as a key, then `outerjoin` does not create row names in `C`.

You cannot perform an outer join using the row labels of `A` as the left key and a variable of `B` as the right key. To perform the outer join, convert the row labels of `A` to a table variable and use the new table variable as a key.

See Also

See Also

`innerjoin` | `join`

Introduced in R2013b

pack

Consolidate workspace memory

Syntax

```
pack
pack filename
pack('filename')
```

Description

`pack` frees up needed space by reorganizing information so that it only uses the minimum memory required. All variables from your base and global workspaces that are less than 2GB are preserved. Any persistent variables that are defined at the time are set to their default value (the empty matrix, `[]`).

Caution: The `pack` function is unable to preserve variables larger than 2GB. It clears them from your workspace.

Do not use the `pack` function with objects that define events and listeners. The `pack` function causes the destructor of any listeners defined for the objects in the workspace. For information on restoring listeners when saving objects, see "Restore Listeners".

The MATLAB software temporarily stores your workspace data in a file called `tp######.mat` (where `######` is a numeric value) that is located in your temporary folder. (You can use the command `dir(tempdir)` to see the files in this folder).

`pack filename` frees space in memory, temporarily storing workspace data in a file specified by `filename`. This file resides in your current working folder and, unless specified otherwise, has a `.mat` file extension.

`pack('filename')` is the function form of `pack`.

Examples

Change the current folder to one that is writable, run `pack`, and return to the previous folder.

```
cwd = pwd;
cd(tempdir);
pack
cd(cwd)
```

Tips

You can only run `pack` from the MATLAB command line.

If you specify a `filename` argument, that file must reside in a folder for which you have write permission.

The `pack` function does not affect the amount of memory allocated to the MATLAB process. You must quit MATLAB to free up this memory.

Since MATLAB uses a heap method of memory management, extended MATLAB sessions may cause memory to become fragmented. When memory is fragmented, there may be plenty of free space, but not enough contiguous memory to store a new large variable.

If you get the `Out of memory` message from MATLAB, the `pack` function may find you some free memory without forcing you to delete variables.

The `pack` function frees space by

- Saving all variables in the base and global workspaces to a temporary file.
- Clearing all variables and functions from memory.
- Reloading the base and global workspace variables back from the temporary file and then deleting the file.

If you use `pack` and there is still not enough free memory to proceed, you must clear some variables. If you run out of memory often, you can allocate larger matrices earlier in the MATLAB session and use these system-specific tips:

- When running MATLAB on The Open Group UNIX platforms, ask your system manager to increase your swap space.

- On Microsoft Windows platforms, increase virtual memory using the Windows Control Panel.

To maintain persistent variables when you run pack, use `mlock` in the function.

See Also

`clear` | `memory`

Introduced before R2006a

pad

Add leading or trailing characters to strings

Syntax

```
newStr = pad(str)
newStr = pad(str,length)
newStr = pad(str,side)
newStr = pad(str,length,side)
newStr = pad( ___ ,padCharacter)
```

Description

`newStr = pad(str)` adds space characters to the end of each string in `str`. All of the strings in `newStr` are as long as the longest string in `str`.

If `str` contains only one piece of text, then `pad` returns `str` unaltered.

`newStr = pad(str,length)` adds space characters to the end of each string, up to the length specified by `length`. If any string in `str` is longer than `length`, then `pad` does not modify that string.

`newStr = pad(str,side)` adds space characters to the side specified by `side`. The `side` argument can be `'left'`, `'right'`, or `'both'`.

`newStr = pad(str,length,side)` adds space characters to the side specified by `side`, up to the length specified by `length`.

`newStr = pad( ___ ,padCharacter)` pads each string with the character specified by `padCharacter` instead of the space character. You can use any of the input arguments in the previous syntaxes.

If `str` contains only one piece of text, then `pad(str,padCharacter)` returns `str` unaltered.

Examples

Pad String Array with Spaces

Create a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Mercury","Gemini","Apollo";
       "Skylab","Skylab B","ISS"]
```

```
str = 2×3 string array
    "Mercury"    "Gemini"      "Apollo"
    "Skylab"     "Skylab B"    "ISS"
```

Pad the elements of `str` with space characters.

```
newStr = pad(str)
```

```
newStr = 2×3 string array
    "Mercury "    "Gemini  "    "Apollo  "
    "Skylab  "    "Skylab B"    "ISS     "
```

Pad String Array to Specified Length

Create a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Mercury","Gemini","Apollo";
       "Skylab","Skylab B","ISS"]
```

```
str = 2×3 string array
    "Mercury"    "Gemini"      "Apollo"
    "Skylab"     "Skylab B"    "ISS"
```

Specify the length so that even the longest string is padded with spaces.

```
newStr = pad(str,12)
```

```
newStr = 2×3 string array
    "Mercury     "    "Gemini      "    "Apollo      "
    "Skylab      "    "Skylab B    "    "ISS         "
```

Pad Strings to Different Sides

Create a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Mary";"Elizabeth";"James"]
```

```
str = 3×1 string array
    "Mary"
    "Elizabeth"
    "James"
```

Pad the strings to the left.

```
newStr = pad(str,'left')
```

```
newStr = 3×1 string array
    "     Mary"
    "Elizabeth"
    "    James"
```

Pad both sides.

```
newStr = pad(str,'both')
```

```
newStr = 3×1 string array
    "  Mary   "
    "Elizabeth"
    "  James  "
```

Pad String Array with Different Character

Create a string array representing numbers and pad the strings with leading zeroes instead of space characters.

```
A = [69.45 31.71 95.36 3.44 7.82];
A = A';
str = string(A)
```

```
str = 5×1 string array
    "69.45"
```

```
    "31.71"
    "95.36"
    "3.44"
    "7.82"
```

```
newStr = pad(str,7,'left','0')
```

```
newStr = 5×1 string array
    "0069.45"
    "0031.71"
    "0095.36"
    "0003.44"
    "0007.82"
```

- "Create String Arrays"
- "Search and Replace Text"

Input Arguments

str — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

length — Length to pad strings to

positive integer

Length to pad strings to, specified as a positive integer.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

side — Side of string to pad

`'right'` (default) | `'left'` | `'both'`

Side of string to pad, specified as `'left'`, `'right'`, or `'both'`. The default behavior is to pad the right side of the string.

Data Types: `char` | `string`

`padCharacter` — Character to pad with
`' '` (default) | character | string

Character to pad with, specified as a character or as a string that contains one character.

Data Types: `char` | `string`

Output Arguments

`newStr` — Output text
string array | character vector | cell array of character vectors

Output text, returned as a string array, a character vector, or a cell array of character vectors. `str` and `newStr` are the same data type.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

If you do not specify `width`, then a full pass through the data is required to determine it.

For more information, see “Tall Arrays”.

See Also

See Also
`erase` | `join` | `replace` | `split` | `strip` | `strsplit`

Topics

"Create String Arrays"
"Search and Replace Text"

Introduced in R2016b

padecoef

Padé approximation of time delays

Syntax

```
[num,den] = padecoef(T,N)
```

Description

`[num,den] = padecoef(T,N)` returns the `N`th-order Padé Approximation of the continuous-time delay `exp(-T*s)` in transfer function form. The row vectors `num` and `den` contain the numerator and denominator coefficients in descending powers of `s`. Both are `N`th-order polynomials.

Examples

Second Order Pade Approximation

Use `padecoef` to estimate the value of e^{-2s} to second order.

```
[a,b] = padecoef(2,2)
```

```
a =

     1    -3     3


b =

     1     3     3
```

The result indicates that the second order approximation is

$$f(s) \approx \frac{a}{b} = \frac{s^2 - 3s + 3}{s^2 + 3s + 3}.$$

Compare the approximation to the actual value at $s = 0.25$.

```
f_approx = @(s) (s^2 - 3*s+3)/(s^2 + 3*s + 3);
f_actual = @(s) exp(-2*s);
abs(f_approx(0.25) - f_actual(0.25))
```

```
ans =

   2.6717e-05
```

Input Arguments

T — Time delay
scalar

Time delay, specified as a real numeric scalar.

Data Types: `single` | `double`

N — Order of approximation
scalar

Order of approximation, specified as a real numeric scalar.

Data Types: `single` | `double`

Definitions

Padé Approximation

The Laplace transform of a time delay of `T` seconds is `exp(-Ts)`. The `padecoef` function approximates this exponential transfer function by a rational transfer function using Padé approximation formulas. [1]

References

[1] Golub, G. H. and C. F. Van Loan. *Matrix Computations*. 4th ed. Johns Hopkins University Press, Baltimore: 2013, pp. 530–532.

See Also

See Also

pade

Introduced in R2008a

pagesetupdlg

Page setup dialog box

Syntax

```
dlg = pagesetupdlg(fig)
```

Note: `pagesetupdlg` is no longer supported. Use `printpreview` instead.

Description

`dlg = pagesetupdlg(fig)` creates a dialog box from which a set of page layout properties for the figure window, `fig`, can be set.

`pagesetupdlg` implements the "Page Setup..." option in the **Figure File Menu**.

`pagesetupdlg` supports setting the layout for a single figure. `fig` must be a single figure handle, not a vector of figures or a Simulink diagram.

See Also

`printdlg` | `printpreview` | `printopt`

Introduced before R2006a

pan

Pan view of graph interactively

Syntax

```
pan on
pan xon
pan yon
pan off
pan
pan(fig,...)
h = pan(fig)
```

Description

`pan on` turns on mouse-based panning for axes in the current figure.

`pan xon` turns on panning only in the *x* direction for axes in a 2-D view in the current figure.

`pan yon` turns on panning only in the *y* direction for axes in a 2-D view in the current figure.

`pan off` turns panning off for axes in the current figure.

`pan` toggles the pan state for axes in the current figure to `on` or `off`.

`pan(fig,...)` sets the pan state for axes in the specified figure.

`h = pan(fig)` returns the figure's pan *mode object* for the figure `fig` for you to customize the mode's behavior.

Using Pan Mode Objects

Access the following properties of pan mode objects.

- *Enable* `'on'|'off'` — Specifies whether this figure mode is currently enabled on the figure.
- *Motion* `'horizontal'|'vertical'|'both'` — The type of panning enabled for the figure. This property only affects axes in a 2-D view (`[0 90]`).
- `FigureHandle <handle>` — The associated figure handle, a read-only property that cannot be set.

Pan Mode Callbacks

You can program the following callbacks for pan mode operations.

- `ButtonDownFilter <function_handle>` — Function to intercept `ButtonDown` events

  The application can inhibit the panning operation under circumstances the programmer defines, depending on what the callback returns. The input function handle should reference a function with two implicit arguments (similar to graphics object callbacks):

  ```
  function [res] = myfunction(obj,event_obj)
  % obj          handle to the object clicked on
  % event_obj    event data (empty in this release)
  % res [output] a logical flag to determine whether the pan
  %              operation should take place(for 'res' set to 'false')
  %              or the 'ButtonDownFcn' property of the object should
  %              take precedence (when 'res' is 'true')
  ```

- `ActionPreCallback <function_handle>` — Function to execute before panning

  Set this callback to if you need to execute code when a pan operation begins. The function handle should reference a function with two implicit arguments (similar to graphics object callbacks):

  ```
  function myfunction(obj,event_obj)
  % obj         handle to the figure that has been clicked on
  % event_obj   object containing struct of event data
  ```

  The event data struct has the following field:

`Axes`	The handle of the axes that is being panned

- `ActionPostCallback <function_handle>` — Function to execute after panning

Set this callback if you need to execute code when a pan operation ends. The function handle should reference a function with two implicit arguments (similar to graphics object callbacks):

```
function myfunction(obj,event_obj)
% obj         handle to the figure that has been clicked on
% event_obj   object containing struct of event data
%             (same as the event data of the
%             'ActionPreCallback' callback)
```

Pan Mode Utility Functions

The following functions in pan mode query and set certain of its properties.

- `flags = isAllowAxesPan(h,ax)` — Function querying permission to pan axes.

  Calling the function `isAllowAxesPan` on the pan object, `h`, with a vector of axes handles, `ax`, as input returns a logical array of the same dimension as the axes handle vector, which indicates whether a pan operation is permitted on the axes objects.
- `setAllowAxesPan(h,ax,flag)` — Function to set permission to pan axes.

  Calling the function `setAllowAxesPan` on the pan object, `h`, with a vector of axes handles, `ax`, and a logical scalar, `flag`, either allows or disallows a pan operation on the axes objects.
- `cn = getAxesPanConstraint(h,ax)` — Function to get constraints of pan operations.

  Calling the function `getAxesZoomConstraint` on the pan object, `h`, with an axes object, `ax`, as input returns the constraint for the axes. The returned constraint is one of these values: `'x'`, `'y'`, `'z'`, `'xy'`, `'xz'`, `'yz'`, or `'unconstrained'`.
- `setAxesPanConstraint(h,ax,cnstr)` — Function to set constraints of pan operations.

  Calling the function `setAxesZoomConstraint` on the pan object, `h`, with an axes object, `ax`, and a constraint option, `cnstr`, sets the constraint for the axes. Specify the constraint as one of these values: `'x'`, `'y'`, `'z'`, `'xy'`, `'xz'`, `'yz'`, or `'unconstrained'`.
- `sty = getAxes3DPanAndZoomStyle(h,ax)` — Function to get style of pan operations.

Calling the function `getAxes3DPanAndZoomStyle` on the pan object, `h`, with a vector of axes handles, `ax`, as input returns the style of panning for each axes. The returned value for each axes is either `'limits'` or `'camera'`.

- `setAxes3DPanAndZoomStyle(h,ax,style)` — Function to set style of pan operations.

  Calling the function `setAxes3DPanAndZoomStyle` on the pan object, `h`, with a vector of axes handles, `ax`, and a character array, `style`, sets the style of panning on each axes. Specify the style as either `'limits'` or `'camera'`.

- `cns = getAxesPanMotion(h,ax)` — Function to get constraints of pan operations (not recommended, use `getAxesPanConstraint`).

  Calling the function `getAxesPanMotion` on the pan object, `h`, with a vector of axes objects, `ax`, as input returns a character cell array of the same dimension as `ax`, which indicates the constraint for each axes. The returned value for each axes is `'horizontal'`, `'vertical'` or `'both'`.

- `setAxesPanMotion(h,ax,constraints)` — Function to set constraints of pan operations (not recommended, use `setAxesPanConstraint`).

  Calling the function `setAxesPanMotion` on the pan object, `h`, with a vector of axes objects, `ax`, and a character array, `constraints`, sets the constraint for each axes. Specify the constraints as `'horizontal'`, `'vertical'` or `'both'`.

Examples

Example 1 — Entering Pan Mode

Plot a graph and turn on Pan mode:

```
plot(magic(10));
pan on
% pan on the plot
```

Example 2 — Constrained Pan

Constrain pan to *x*-axis using `set`:

```
plot(magic(10));
h = pan;
h.Motion = 'horizontal';
h.Enable = 'on';
% pan on the plot in the horizontal direction.
```

Example 3 — Constrained Pan in Subplots

Create four axes as subplots and give each one a different panning behavior:

```
ax1 = subplot(2,2,1);
plot(1:10);
h = pan;
ax2 = subplot(2,2,2);
plot(rand(3));
setAllowAxesPan(h,ax2,false);
ax3 = subplot(2,2,3);
plot(peaks);
setAxesPanMotion(h,ax3,'horizontal');
ax4 = subplot(2,2,4);
contour(peaks);
setAxesPanMotion(h,ax4,'vertical');
% pan on the plots.
```

Example 4 — Coding a ButtonDown Callback

Create a buttonDown callback for pan mode objects to trigger. Copy the following code to a new file, execute it, and observe panning behavior:

```
function demo
% Allow a line to have its own 'ButtonDownFcn' callback.
hLine = plot(rand(1,10));
hLine.ButtonDownFcn = 'disp(''This executes'')';
hLine.Tag = 'DoNotIgnore';
h = pan;
h.ButtonDownFilter = @mycallback;
h.Enable = 'on';
% mouse click on the line
%
function [flag] = mycallback(obj,event_obj)
% If the tag of the object is 'DoNotIgnore', then
% return true.
```

```
% Indicate what the target is.
disp(['Clicked ' obj.Type ' object'])
objTag = obj.Tag;
if strcmpi(objTag,'DoNotIgnore')
   flag = true;
else
   flag = false;
end
```

Example 5 — Coding Pre- and Post-Callback Behavior

Create callbacks for pre- and post-ButtonDown events for pan mode objects to trigger. Copy the following code to a new file, execute it, and observe panning behavior:

```
function demo
% Listen to pan events
plot(1:10);
h = pan;
h.ActionPreCallback = @myprecallback;
h.ActionPostCallback = @mypostcallback;
h.Enable = 'on';
%
function myprecallback(obj,evd)
disp('A pan is about to occur.');
%
function mypostcallback(obj,evd)
newLim = evd.Axes.XLim;
msgbox(sprintf('The new X-Limits are [%.2f,%.2f].',newLim));
```

Example 6 — Creating a Context Menu for Pan Mode

Coding a context menu that lets the user to switch to Zoom mode by right-clicking:

```
figure
plot(magic(10));
hCM = uicontextmenu;
hMenu = uimenu('Parent',hCM,'Label','Switch to zoom',...
        'Callback','zoom(gcbf,''on'')');
hPan = pan(gcf);
hPan.UIContextMenu = hCM;
pan('on')
```

You cannot add items to the built-in pan context menu, but you can replace it with your own.

Tips

You can create a pan mode object once and use it to customize the behavior of different axes, as Example 3 illustrates. You can also change its callback functions on the fly.

Note: Do not change figure callbacks within an interactive mode. While a mode is active (when panning, zooming, etc.), you will receive a warning if you attempt to change any of the figure's callbacks and the operation will not succeed. The one exception to this rule is the figure `WindowButtonMotionFcn` callback, which can be changed from within a mode. Therefore, if you are creating a UI that updates a figure's callbacks, the UI should some keep track of which interactive mode is active, if any, before attempting to do this.

When you assign different pan behaviors to different `subplot` axes via a mode object and then link them using the `linkaxes` function, the behavior of the axes you manipulate with the mouse carries over to the linked axes, regardless of the behavior you previously set for the other axes.

Alternatives

Use the Pan tool on the figure toolbar to enable and disable pan mode on a plot, or select **Pan** from the figure's **Tools** menu. For details, see “Panning — Shifting Your View of the Graph”.

See Also

`zoom` | `linkaxes` | `rotate3d`

Introduced before R2006a

matlab.unittest.parameters

Summary of classes associated with MATLAB Unit Test parameters

Description

The `matlab.unittest.parameters` package consists of the following classes used in parameterized testing.

matlab.unittest.parameters.EmptyParameter	Empty parameter implementation
matlab.unittest.parameters.ClassSetupParameter	Specification of Class Setup Parameter
matlab.unittest.parameters.TestParameter	Specification of Test Parameter
matlab.unittest.parameters.MethodSetupParameter	Specification of Method Setup Parameter

See Also

See Also

matlab.unittest.TestSuite.selectIf

Topics

"Create Basic Parameterized Test"
"Create Advanced Parameterized Test"

matlab.unittest.parameters.EmptyParameter class

Package: matlab.unittest.parameters

Empty parameter implementation

Description

The `matlab.unittest.parameters.EmptyParameter` class is a `Parameter` implementation that provides no parameter information. There is no need for test authors to interact with this `Parameter` directly. This class provides an empty parameter instance to the `Parameterization` property of a nonparameterized test element.

Properties

`Property`

Character vector indicating the name of the property that defines the Empty Parameter.

`Name`

Character vector indicating the name that uniquely identifies a particular value for a Empty Parameter.

`Value`

Value of the Empty Parameter. The `Value` property holds the data that the Test Runner uses for parameterized testing.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.unittest.TestCase

Topics

"Create Basic Parameterized Test"
"Create Advanced Parameterized Test"

Introduced in R2014a

matlab.unittest.parameters.ClassSetupParameter class

Package: matlab.unittest.parameters

Specification of Class Setup Parameter

Description

The `matlab.unittest.parameters.ClassSetupParameter` class holds information about a single value of a Class Setup Parameter.

Properties

`Property`

Character vector indicating the name of the property that defines the Class Setup Parameter.

`Name`

Character vector indicating the name that uniquely identifies a particular value for a Class Setup Parameter.

`Value`

Value of the Class Setup Parameter. The `Value` property holds the data that the Test Runner uses for parameterized testing.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.unittest.TestCase

Topics

"Create Basic Parameterized Test"
"Create Advanced Parameterized Test"

Introduced in R2014a

matlab.unittest.parameters.TestParameter class

Package: matlab.unittest.parameters

Specification of Test Parameter

Description

The `matlab.unittest.parameters.TestParameter` class holds information about a single value of a Test Parameter.

Properties

`Property`

Character vector indicating the name of the property that defines the Test Parameter.

`Name`

Character vector indicating the name that uniquely identifies a particular value for a Test Parameter.

`Value`

Value of the Test Parameter. The `Value` property holds the data that the Test Runner uses for parameterized testing.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.unittest.TestCase

Topics

"Create Basic Parameterized Test"
"Create Advanced Parameterized Test"

Introduced in R2014a

matlab.unittest.parameters.MethodSetupParameter class

Package: matlab.unittest.parameters

Specification of Method Setup Parameter

Description

The `matlab.unittest.parameters.MethodSetupParameter` class holds information about a single value of a Method Setup Parameter.

Properties

`Property`

Character vector indicating the name of the property that defines the Method Setup Parameter.

`Name`

Character vector indicating the name that uniquely identifies a particular value for a Method Setup Parameter.

`Value`

Value of the Method Setup Parameter. The `Value` property holds the data that the Test Runner uses for parameterized testing.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.unittest.TestCase

Topics

"Create Basic Parameterized Test"
"Create Advanced Parameterized Test"

Introduced in R2014a

pareto

Pareto chart



Syntax

```
pareto(Y)
pareto(Y,names)
pareto(Y,X)
H = pareto(...)
[H,ax] = pareto(...)
```

Description

Pareto charts display the values in the vector `Y` as bars drawn in descending order. Values in `Y` must be nonnegative and not include `NaN`s. Only the first 95% of the cumulative distribution is displayed.

`pareto(Y)` labels each bar with its element index in `Y` and also plots a line displaying the cumulative sum of `Y`.

`pareto(Y,names)` labels each bar with the associated text in the matrix or cell array `names`.

`pareto(Y,X)` labels each bar with the associated value from `X`.

`pareto(ax,..)` plots into the axes `ax` rather than the current axes, `gca`.

`H = pareto(...)` returns the primitive `Line` and `Bar` objects created.

`[H,ax] = pareto(...)` additionally returns the two axes objects created.

Examples

Create Pareto Chart

Create a Pareto chart of vector `y`.

```
y = [90,75,30,60,5,40,40,5];
figure
pareto(y)
```

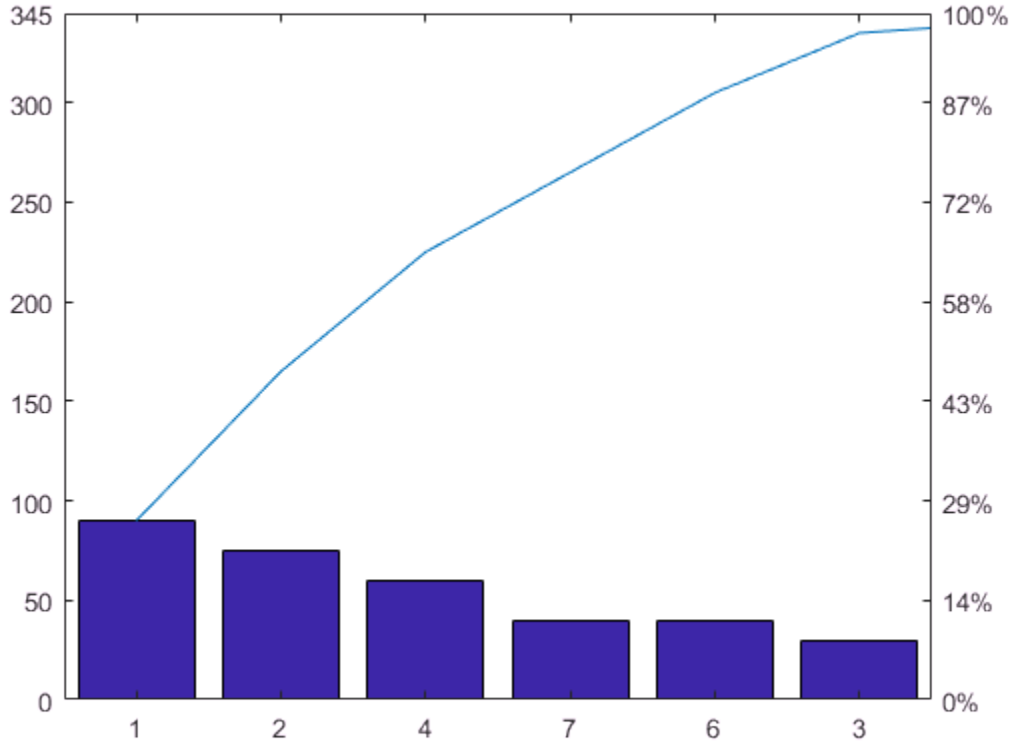

`pareto` displays the elements in `y` as bars in descending order and labels each bar with its index in `y`. Since `pareto` displays only the first 95% of the cumulative distribution, some elements in `y` are not displayed.

Label Bars in Pareto Chart

Examine the cumulative productivity of a group of programmers to see how normal its distribution is. Label each bar with the name of the programmer.

```
codelines = [200 120 555 608 1024 101 57 687];
coders = {'Fred','Ginger','Norman','Max','Julia','Wally','Heidi','Pat'};

figure
pareto(codelines, coders)
title('Lines of Code by Programmer')
```

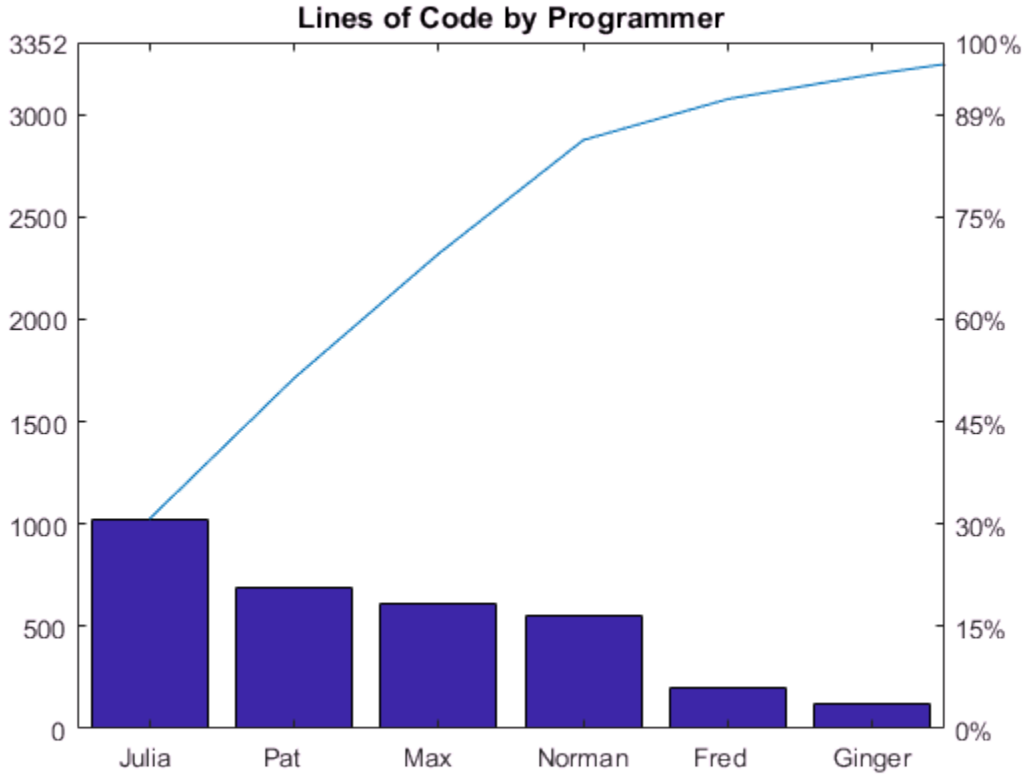

Tips

You cannot place datatips (use the Datacursor tool) on graphs created with `pareto`.

See Also

See Also

Functions

`bar` | `histogram` | `line`

Properties

Bar Properties | Primitive Line Properties

Introduced before R2006a

parfor

Parallel for loop

Syntax

```
parfor loopvar = initval:endval; statements; end
parfor (loopvar = initval:endval, M); statements; end
```

Description

`parfor loopvar = initval:endval; statements; end` executes a series of MATLAB statements for values of `loopvar` between `initval` and `endval`, inclusive, which specify a vector of increasing integer values. The loop runs in parallel when you have the Parallel Computing Toolbox or when you create a MEX function or standalone code with MATLAB Coder. Unlike a traditional `for`-loop, iterations are not executed in a guaranteed order. You cannot call scripts directly in a `parfor`-loop. However, you can call functions that call scripts.

`parfor (loopvar = initval:endval, M); statements; end` executes statements in a loop using a maximum of `M` workers or threads, where `M` is a nonnegative integer.

Examples

Perform three large eigenvalue computations using three workers or cores with Parallel Computing Toolbox software:

```
parpool(3)
parfor i=1:3, c(:,i) = eig(rand(1000)); end
```

Tips

- If you have Parallel Computing Toolbox software, see the function reference pages for `parfor` and `parpool` for additional information.

- If you have MATLAB Coder software, see the `parfor` function reference page for additional information.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Treated as a `for`-loop in a MATLAB Function block or when used with `fiaccel`.
- See `parfor` in MATLAB Coder.
- See "Generate Code with Parallel for-Loops (parfor)" (MATLAB Coder).

See Also

`for`

Introduced in R2008a

parse

Class: inputParser

Parse function inputs

Syntax

`parse(p,argList)`

Description

`parse(p,argList)` parses and validates the inputs in `arglist`.

Input Arguments

p

Object of class inputParser.

argList

Comma separated list of inputs to parse and validate for your custom function. The class of each input depends upon your function definition.

Examples

Input Parsing

Parse and validate required and optional function inputs.

Create a custom function with required and optional inputs in the file `findArea.m`.

```
function a = findArea(width,varargin)
   p = inputParser;
   defaultHeight = 1;
```

```
defaultUnits = 'inches';
defaultShape = 'rectangle';
expectedShapes = {'square','rectangle','parallelogram'};

addRequired(p,'width',@isnumeric);
addOptional(p,'height',defaultHeight,@isnumeric);
addParameter(p,'units',defaultUnits);
addParameter(p,'shape',defaultShape,...
              @(x) any(validatestring(x,expectedShapes)));

parse(p,width,varargin{:});
a = p.Results.width .* p.Results.height;
```

The input parser checks whether `width` and `height` are numeric, and whether the `shape` matches a character vector in the `expectedShapes` cell array. `@` indicates a function handle, and the syntax `@(x)` creates an anonymous function with input `x`.

Call the function with inputs that do not match the scheme. For example, specify a nonnumeric value for the `width` input:

```
findArea('text')
```

```
Error using findArea (line 14)
The value of 'width' is invalid. It must satisfy the function: isnumeric.
```

Specify an unsupported value for `shape`:

```
findArea(4,'shape','circle')
```

```
Error using findArea (line 14)
The value of 'shape' is invalid. Expected input to match one of these values:

'square', 'rectangle', 'parallelogram'

The input, 'circle', did not match any of the valid values.
```

See Also

See Also

addOptional | addParameter | addRequired | inputParser

Introduced in R2007a

parseSoapResponse

Convert response string from SOAP (Simple Object Access Protocol) server into MATLAB types

Compatibility

`parseSoapResponse` will be removed in a future release. Use `matlab.wsdl.createWSDLClient` instead.

Syntax

```
data = parseSoapResponse(response)
```

Description

`data = parseSoapResponse(response)` extracts data from SOAP server `response` and converts to MATLAB types.

Examples

Retrieve Book Information from Library Database

This example assumes the library is on a local intranet and does not use an actual endpoint; therefore, you cannot run it.

Retrieve the name of the author of a book titled “In the Fall.” The relative path of the library service is `urn:LibraryCatalog`. To get the author's name, use the `getAuthor` function, which takes the book name as the input value. The `getAuthor` parameter is `nameToLookUp`. The XML data type for title is `{http://www.w3.org/2001/XMLSchema}string`. The SOAP message style is `rpc` by default.

Create the SOAP message.

```
message = createSoapMessage(...
```

```
  'urn:LibraryCatalog',...
  'getAuthor',...
  {'In the Fall'},...
  {'nameToLookUp'},...
  {'{http://www.w3.org/2001/XMLSchema}string'})
```

```
message =

[#document: null]
```

This response does not necessarily indicate that the message is valid, although certain input problems produce error messages.

Send the message to the server for processing, and get the author's name back. The server endpoint is `http://test/soap/services/LibraryCatalog`. The server method is `urn:LibraryCatalog#getAuthor`.

```
response = callSoapService(...
  'http://test/soap/services/LibraryCatalog',...
  'urn:LibraryCatalog#getAuthor',...
  message)
```

```
<?xml version="1.0" encoding="utf-8"?>
<soapenv:Envelope
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
<soapenv:Body>
<getAuthorResponse xmlns="urn:LibraryCatalog">
<ns1:getAuthorReturn xmlns:ns1="http://latestversion.soap.test">
Kate Alvin
</ns1:getAuthorReturn>
</getAuthorResponse>
</soapenv:Body>
</soapenv:Envelope>
```

MATLAB returns the message in a single line, displayed here on separate lines for legibility.

Extract the author's name.

```
author = parseSoapResponse(response)
```

```
author = Kate Alvin
```

MATLAB automatically converted the XML string data type to `char`.

Input Arguments

`response` — Data from SOAP server

string

Data from SOAP server, specified as a string. `response` is the output from the `callSoapService` function.

Output Arguments

`data` — Output of SOAP service call

cell array of any valid MATLAB type

Output of SOAP service call, returned as a cell array of any valid MATLAB type. For information about `data`, see the documentation for the SOAP service used in the `callSoapService` function.

See Also

See Also

`callSoapService` | `createSoapMessage` | `matlab.wsdl.createWSDLClient` | `urlread` | `xmlread`

Introduced before R2006a

pascal

Pascal matrix

Syntax

```
A = pascal(n)
A = pascal(n,1)
A = pascal(n,2)
```

Description

`A = pascal(n)` returns a "Pascal's Matrix" on page 1-8288 of order `n`: a symmetric positive definite matrix with integer entries taken from Pascal's triangle. The inverse of `A` has integer entries.

`A = pascal(n,1)` returns the lower triangular Cholesky factor (up to the signs of the columns) of the Pascal matrix. It is *involutary*, that is, it is its own inverse.

`A = pascal(n,2)` returns a transposed and permuted version of `pascal(n,1)`. `A` is a cube root of the identity matrix.

Examples

Matrix from Pascal's Triangle

Compute the fourth-order Pascal matrix.

```
A = pascal(4)
```

```
A =

     1     1     1     1
     1     2     3     4
     1     3     6    10
     1     4    10    20
```

Compute the lower triangular Cholesky factor of the third-order Pascal matrix and verify it is involutary.

```
A = pascal(3,1)
```

```
A =

     1     0     0
     1    -1     0
     1    -2     1
```

```
inv(A)
```

```
ans =

     1     0     0
     1    -1     0
     1    -2     1
```

Definitions

Pascal's Matrix

Pascal's triangle is a triangle formed by rows of numbers. The first row has entry `1`. Each succeeding row is formed by adding adjacent entries of the previous row, substituting a `0` where there is no adjacent entry. Pascal's matrix is generated by selecting the portion of Pascal's triangle that corresponds to the specified matrix dimensions, as outlined in the graphic. The matrix outlined corresponds to the MATLAB command `pascal(4)`.

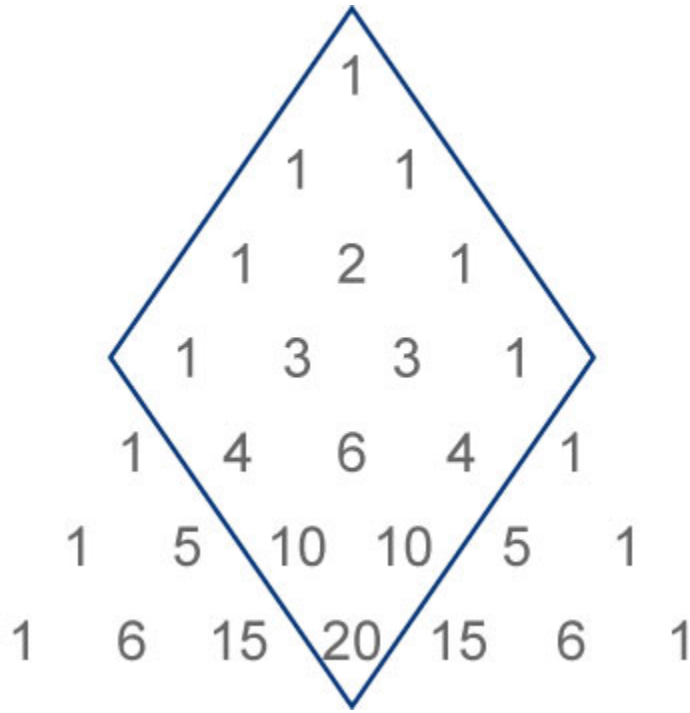

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`vander` | `chol` | `gallery`

Introduced before R2006a

patch

Create one or more filled polygons

Syntax

```
patch(X,Y,C)
patch(X,Y,Z,C)
patch('XData',X,'YData',Y)
patch('XData',X,'YData',Y,'ZData',Z)

patch('Faces',F,'Vertices',V)

patch(S)

patch(___,Name,Value)
patch(ax,___)

p = patch(___)
```

Description

`patch(X,Y,C)` creates one or more filled polygons using the elements of `X` and `Y` as the coordinates for each vertex. `patch` connects the vertices in the order that you specify them. To create one polygon, specify `X` and `Y` as vectors. To create multiple polygons, specify `X` and `Y` as matrices where each column corresponds to a polygon. `C` determines the polygon colors.

`patch(X,Y,Z,C)` creates the polygons in 3-D coordinates using `X`, `Y`, and `Z`. To view the polygons in a 3-D view, use the `view(3)` command. `C` determines the polygon colors.

`patch('XData',X,'YData',Y)` is similar to `patch(X,Y,C)`, except that you do not have to specify color data for the 2-D coordinates.

`patch('XData',X,'YData',Y,'ZData',Z)` is similar to `patch(X,Y,Z,C)`, except that you do not have to specify color data for the 3-D coordinates.

`patch('Faces',F,'Vertices',V)` creates one or more polygons where `V` specifies vertex values and `F` defines which vertices to connect. Specifying only unique vertices and their connection matrix can reduce the size of the data when there are many polygons. Specify one vertex per row in `V`. To create one polygon, specify `F` as a vector. To create multiple polygons, specify `F` as a matrix with one row per polygon. Each face does not have to have the same number of vertices. To specify different numbers of vertices, pad `F` with `NaN` values.

`patch(S)` creates one or more polygons using structure `S`. The structure fields correspond to patch property names and the field values corresponding to property values. For example, `S` can contain the fields `Faces` and `Vertices`.

`patch( ___ ,Name,Value)` creates polygons and specifies one or more patch properties using name-value pair arguments. A patch is the object that contains the data for all of the polygons created. You can specify patch properties with any of the input argument combinations in the previous syntaxes. For example, `'LineWidth',2` sets the outline width for all of the polygons to 2 points.

`patch(ax, ___ )` creates the patch in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`p = patch( ___ )` returns the patch object that contains the data for all the polygons. Use `p` to query and modify properties of the patch object after it is created. For a list of properties and descriptions, see Patch Properties.

Examples

Specifying Coordinates

Create a single polygon by specifying the (*x*,*y*) coordinates of each vertex. Then, add two more polygons to the figure.

Create a red square with vertices at `(0,0)`, `(1,0)`, `(1,1)`, and `(0,1)`. Specify `x` as the *x*-coordinates of the vertices and `y` as the *y*-coordinates. `patch` automatically connects the last (*x*,*y*) coordinate with the first (*x*,*y*) coordinate.

```
x = [0 1 1 0];
y = [0 0 1 1];
patch(x,y,'red')
```

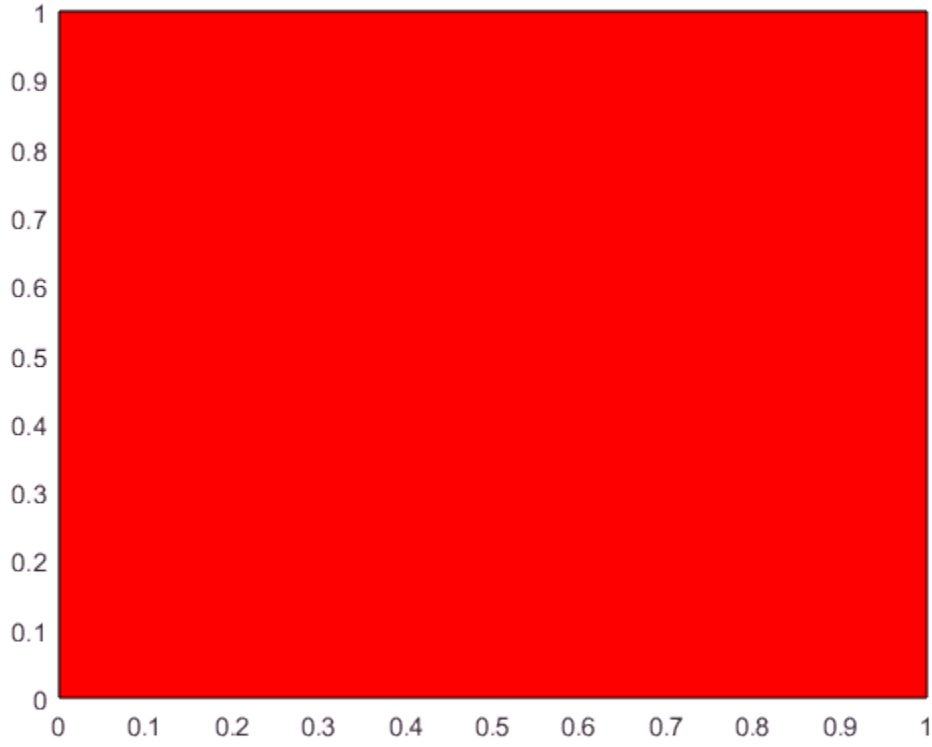

Create two polygons by specifying `x` and `y` as two-column matrices. Each column defines the coordinates for one of the polygons. `patch` adds the polygons to the current axes without clearing the axes.

```
x2 = [2 5; 2 5; 8 8];
y2 = [4 0; 8 2; 4 0];
patch(x2,y2,'green')
```

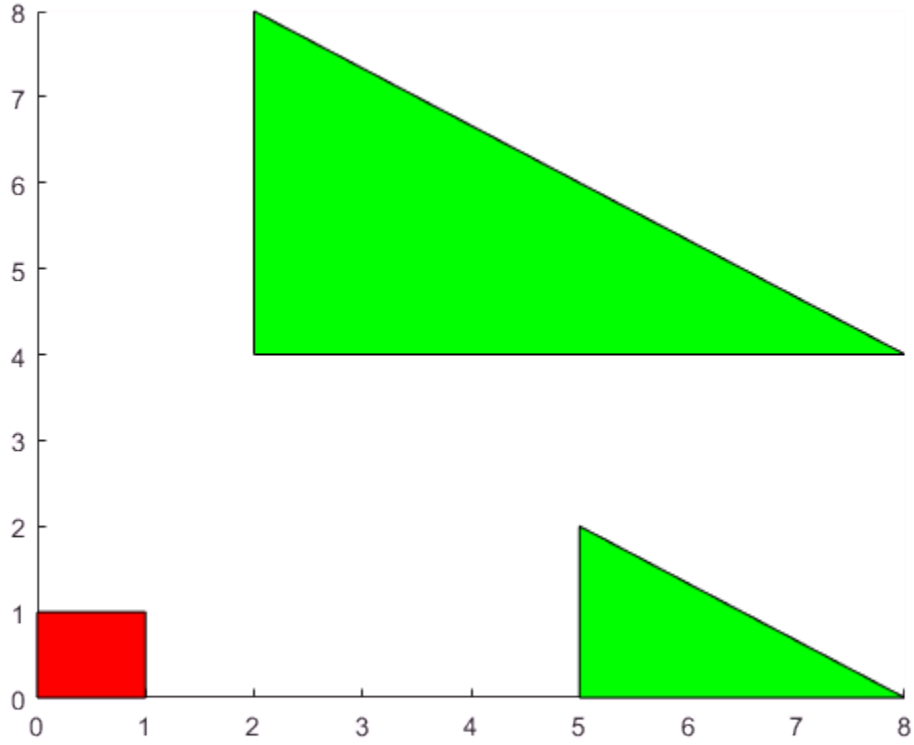

Specifying Faces and Vertices

Create a single polygon by specifying the coordinates of each unique vertex and a matrix that defines how to connect them. Then, add two more polygons to the figure.

Create a red square with corners at `(0,0)`, `(1,0)`, `(1,1)`, and `(0,1)`. Specify `v` so that each row defines the (*x*,*y*) coordinates for one vertex. Then, specify `f` as the vertices to connect. Set the color by specifying the `FaceColor` property.

```
v = [0 0; 1 0; 1 1; 0 1];
f = [1 2 3 4];
patch('Faces',f,'Vertices',v,'FaceColor','red')
```

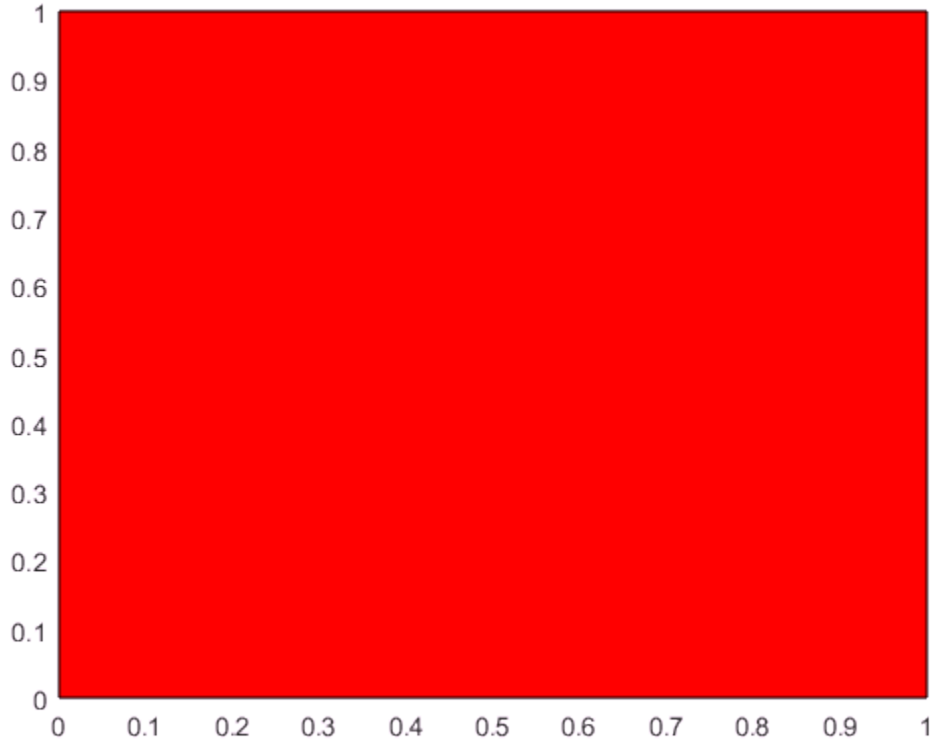

Create two polygons by specifying `f` as a two-row matrix. Each row defines the face for one patch.

```
v2 = [2 4; 2 8; 8 4; 5 0; 5 2; 8 0];
f2 = [1 2 3;
    4 5 6];
patch('Faces',f2,'Vertices',v2,'FaceColor','green')
```

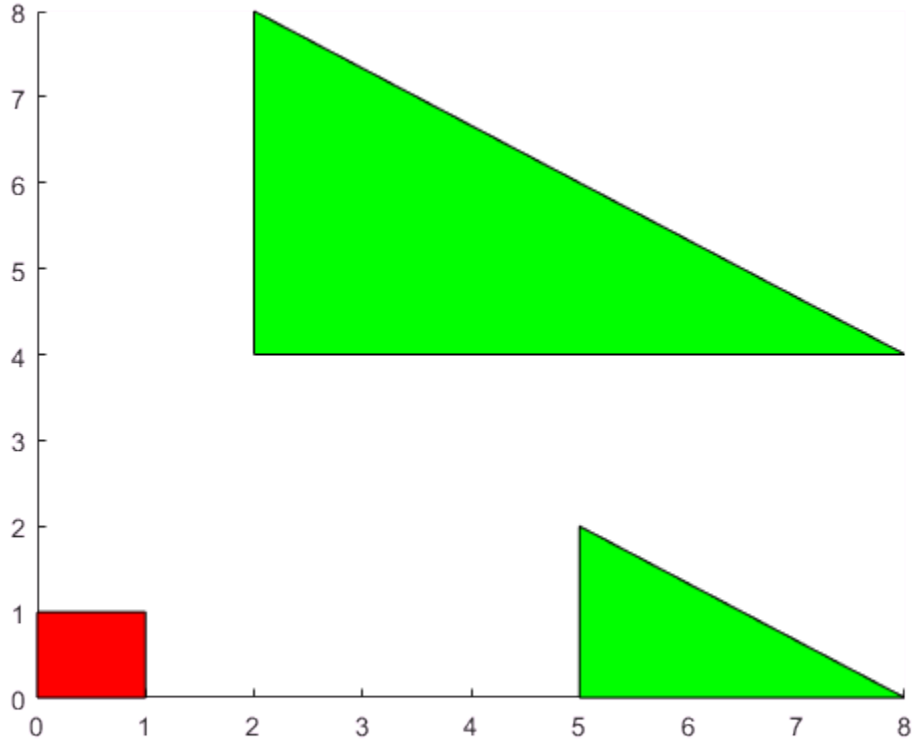

Different Polygon Face Colors

Create two polygons and use a different color for each polygon face. Use a colorbar to show how the colors map into the colormap.

Create the polygons using matrices `x` and `y`. Specify `c` as an column vector with two elements since there are two polygon faces, and add a colorbar.

```
x = [2 5; 2 5; 8 8];
y = [4 0; 8 2; 4 0];
c = [0; 1];
figure
```

```
patch(x,y,c)
colorbar
```

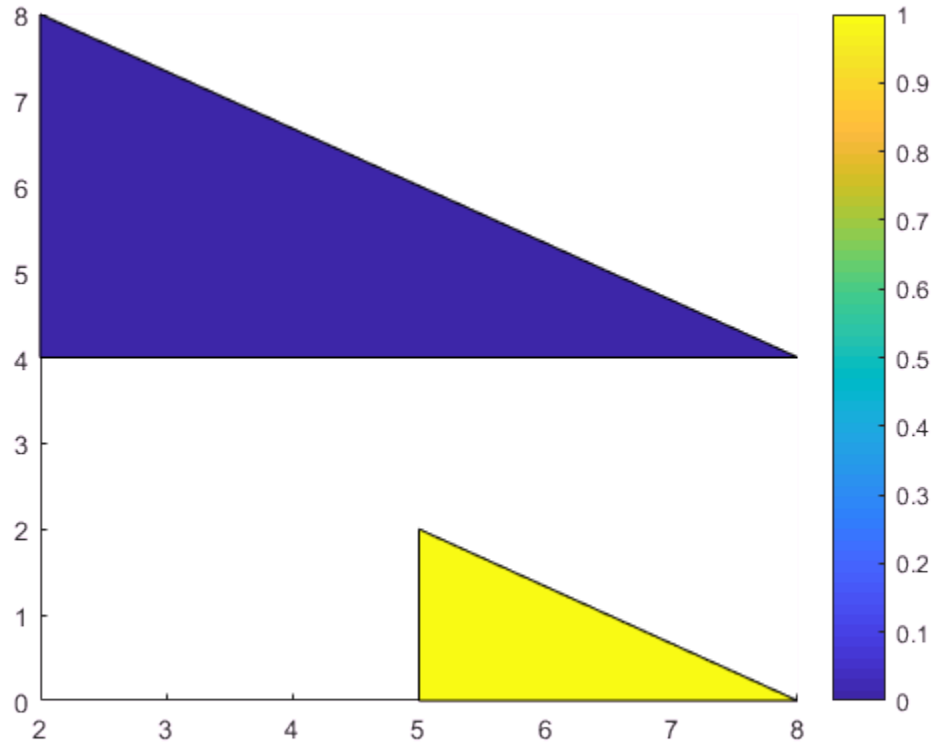

Alternatively, you can get the same result when using `f` and `v` instead. When you create the polygons, set `FaceVertexCData` to a column vector with two elements since there are two polygon faces. Set `FaceColor` to `'flat'`.

```
v = [2 4; 2 8; 8 4; 5 0; 5 2; 8 0];
f = [1 2 3; 4 5 6];
col = [0; 1];
figure
patch('Faces',f,'Vertices',v,'FaceVertexCData',col,'FaceColor','flat');
colorbar
```

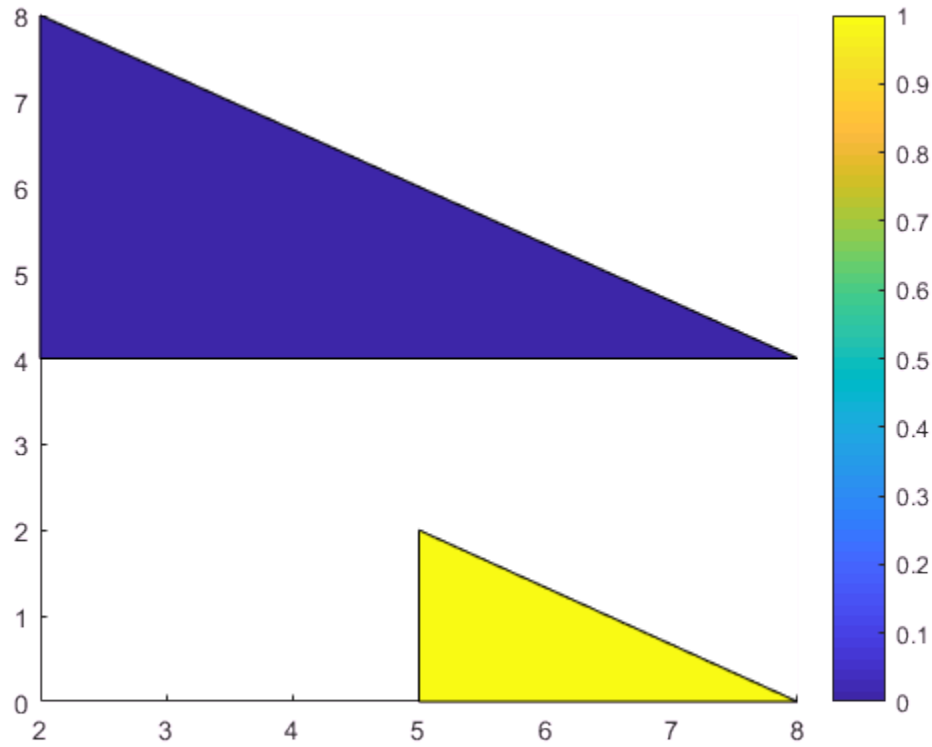

Interpolated Polygon Face Colors

Interpolate colors across polygon faces by specifying a color at each polygon vertex, and use a colorbar to show how the colors map into the colormap.

Create the polygons using matrices `x` and `y`. Specify `c` as a matrix the same size as `x` and `y` defining one color per vertex, and add a colorbar.

```
x = [2 5; 2 5; 8 8];
y = [4 0; 8 2; 4 0];
c = [0 3; 6 4; 4 6];
figure
```

```
patch(x,y,c)
colorbar
```

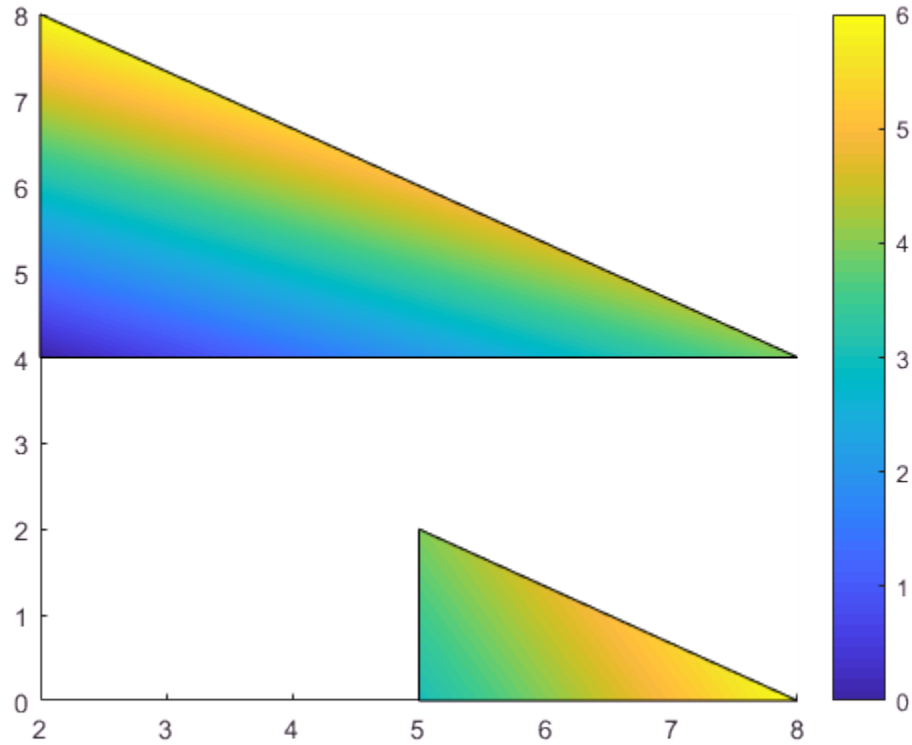

Alternatively, you can get the same result using `f` and `v` instead. When you create the polygons, set `FaceVertexCData` to a column vector with one value per vertex and set `FaceColor` to `'interp'`.

```
v = [2 4; 2 8; 8 4; 5 0; 5 2; 8 0];
f = [1 2 3; 4 5 6];
col = [0; 6; 4; 3; 4; 6];
figure
patch('Faces',f,'Vertices',v,'FaceVertexCData',col,'FaceColor','interp');
colorbar
```

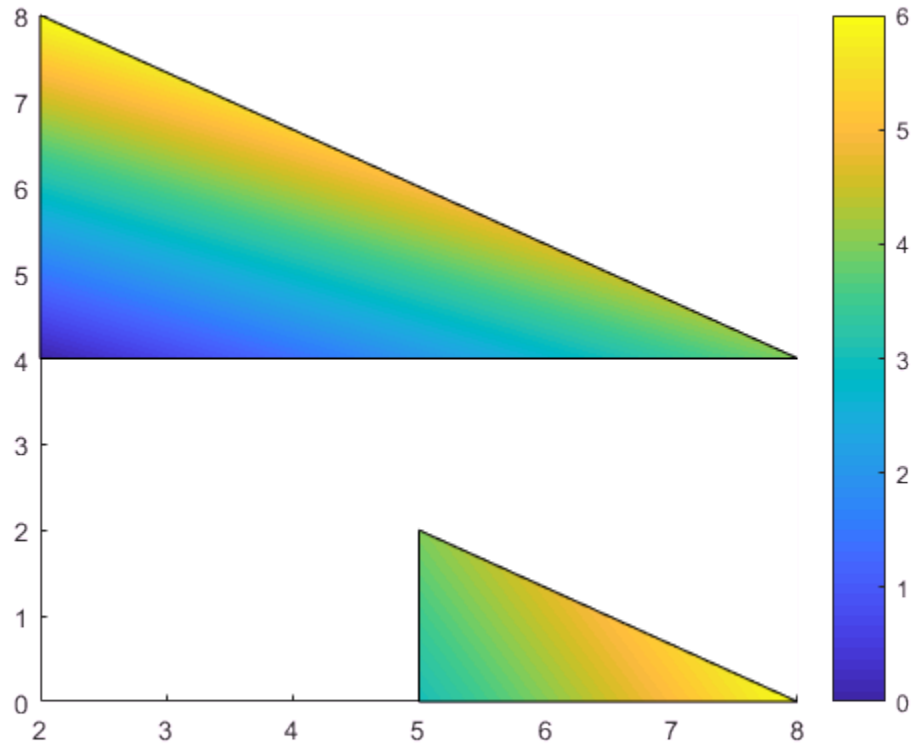

Polygon Edges Without Faces

Create a polygon with green edges and do not display the face. Then, create a second polygon with a different color for each edge.

```
v = [0 0; 1 0; 1 1];
f = [1 2 3];
figure
patch('Faces',f,'Vertices',v,...
    'EdgeColor','green','FaceColor','none','LineWidth',2);
```

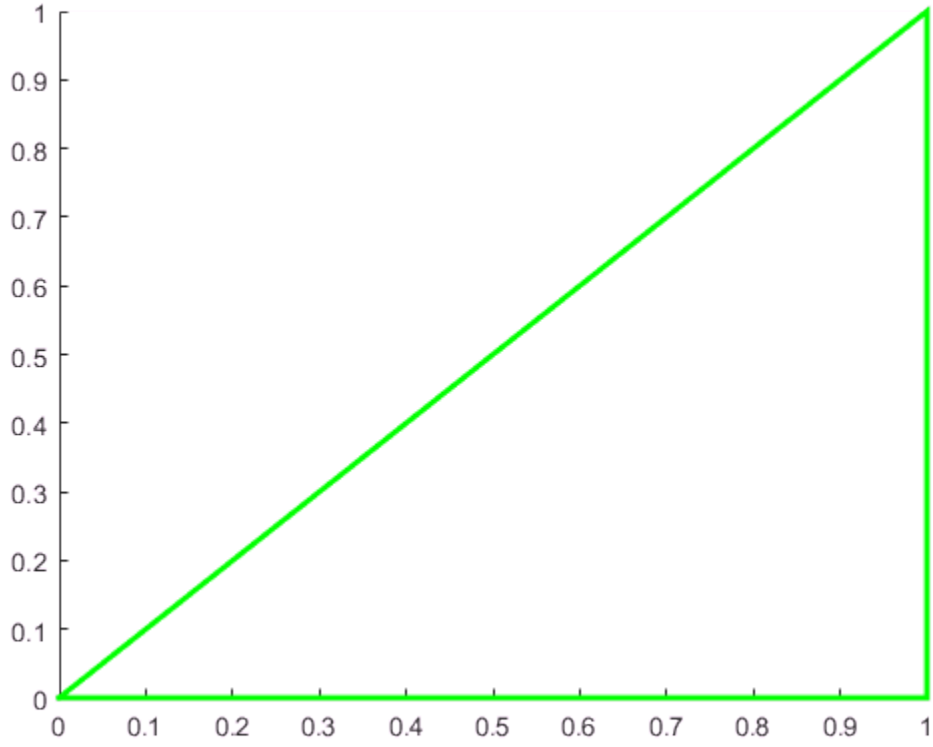

Use a different color for each edge by specifying a color for each vertex and setting `EdgeColor` to `'flat'`.

```
v = [2 0; 3 0; 3 1];
f = [1 2 3];
c = [1 0 0; % red
    0 1 0; % green
    0 0 1]; % blue
patch('Faces',f,'Vertices',v,'FaceVertexCData',c,...
    'EdgeColor','flat','FaceColor','none','LineWidth',2);
```

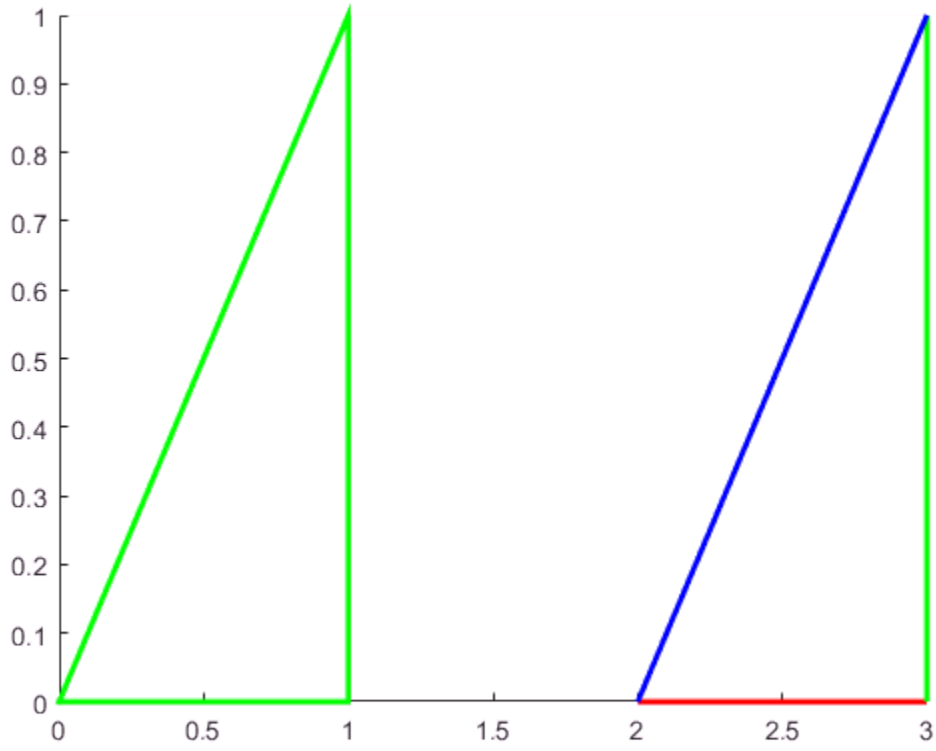

Polygons Using Structure

Use a structure to create two polygons. First, create a structure with fields names that match patch property names. Then, use the structure to create the polygons.

```
clear S
S.Vertices = [2 4; 2 8; 8 4; 5 0; 5 2; 8 0];
S.Faces = [1 2 3; 4 5 6];
S.FaceVertexCData = [0; 1];
S.FaceColor = 'flat';
S.EdgeColor = 'red';
S.LineWidth = 2;
figure
```

```
patch(S)
```

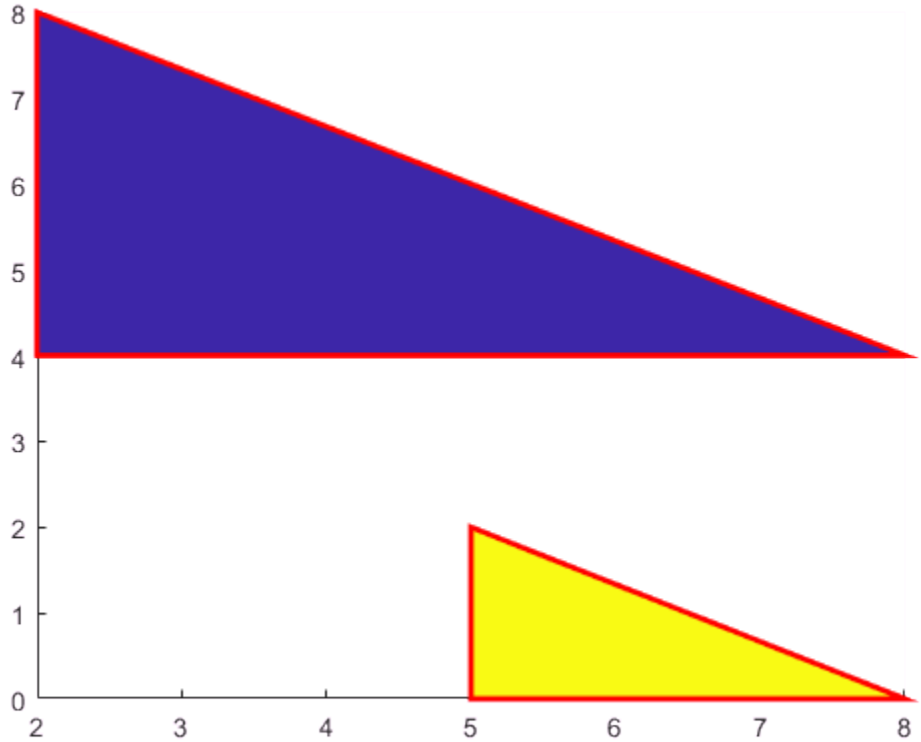

Semitransparent Polygons

Create two semitransparent polygons by setting the `FaceAlpha` property to a value between `0` and `1`.

```
v1 = [2 4; 2 8; 8 4];
f1 = [1 2 3];
figure
patch('Faces',f1,'Vertices',v1,'FaceColor','red','FaceAlpha',.3);
```

```
v2 = [2 4; 2 8; 8 8];
f2 = [1 2 3];
patch('Faces',f2,'Vertices',v2,'FaceColor','blue','FaceAlpha',.5);
```

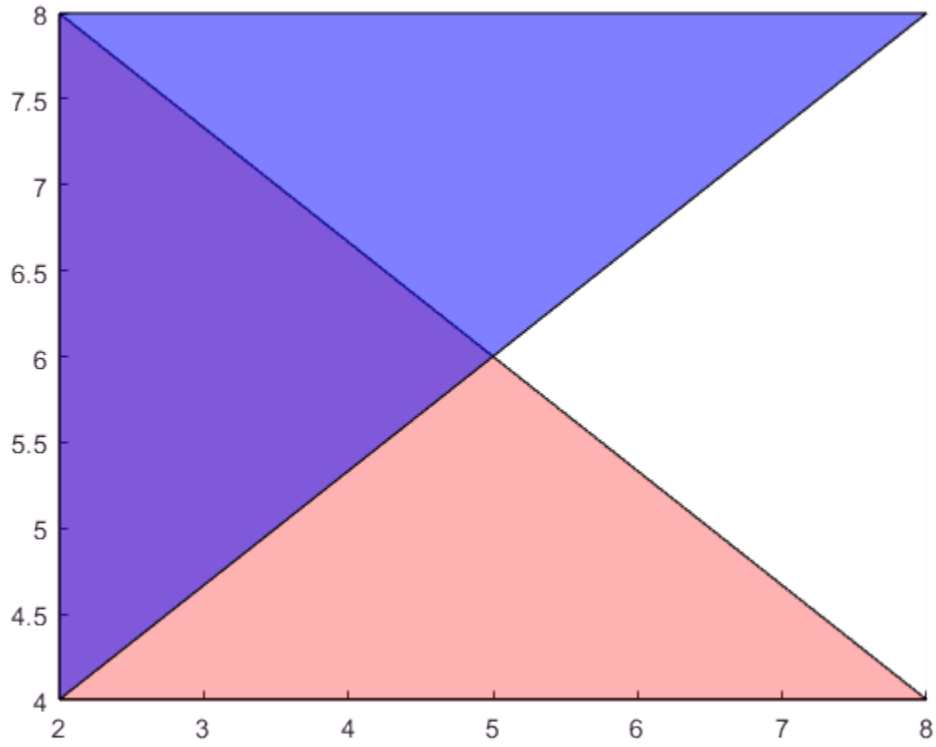

Create Multicolored Line

Create a multicolored line with markers at each vertex. Interpolate the colors and use a colorbar to show how the values map to the colormap.

Create the data. Set the last entry of `y` to `NaN` so that `patch` creates a line instead of a closed polygon. Define a color for each vertex using the `y` values. The values in `c` map to colors in the colormap.

```
x = linspace(1,10,15);
y = sin(x);
y(end) = NaN;
c = y;
```

Create the line. Show markers at each vertex and set the `EdgeColor` to `'interp'` to interpolate the colors between vertices. Add a colorbar.

```
figure
patch(x,y,c,'EdgeColor','interp','Marker','o','MarkerFaceColor','flat');
colorbar;
```

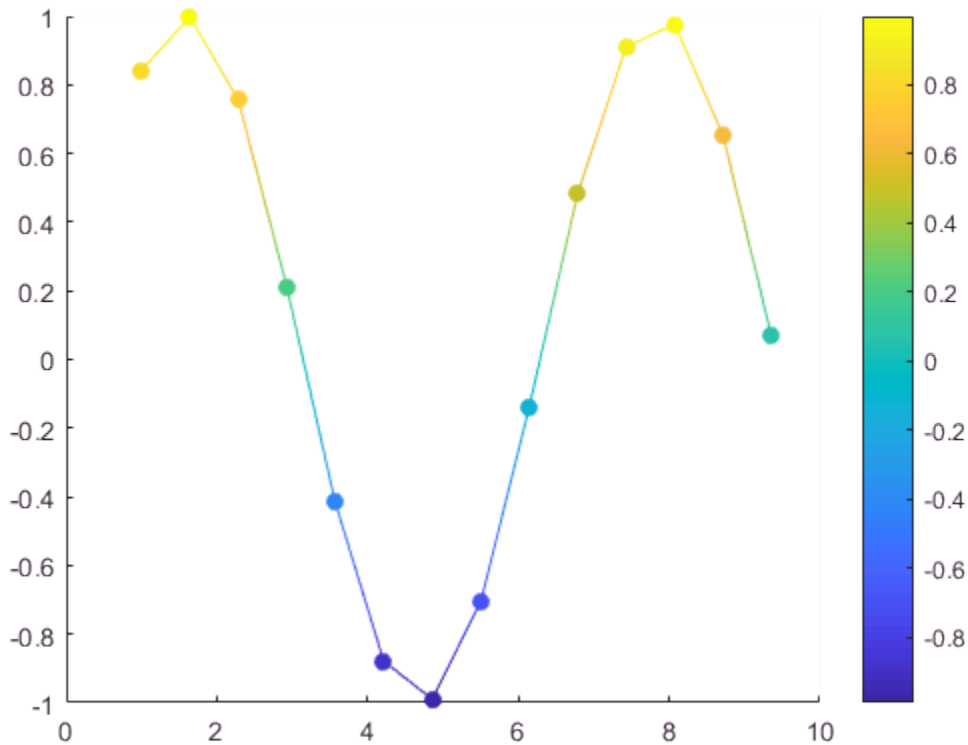

- “Multifaceted Patches”

Input Arguments

X — *x*-coordinates for vertices

vector | matrix

x-coordinates for the vertices, specified in one of these forms:

- Vector — Create one polygon.
- Matrix — Create `n` polygons with `m` vertices each, where `[m,n] = size(X)`. Each column in the matrix corresponds to one polygon.

If the data does not define closed polygons, then `patch` closes the polygons. If the edges of an individual polygon intersect themselves, the resulting polygons might be partly filled. In that case, it is better to divide the patch object into smaller polygons.

When you specify `X`, the `patch` function sets the XData property for the patch object to the same value. The patch object automatically calculates the face and vertex data and sets the Faces and Vertices properties to the appropriate values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Y — *y*-coordinates for vertices

vector | matrix

y-coordinates for the vertices, specified in one of these forms:

- Vector — Create one polygon.
- Matrix — Create `n` polygons with `m` vertices each, where `[m,n] = size(Y)`. Each column in the matrix corresponds to one polygon.

If the data does not define closed polygons, then `patch` closes the polygons. If the edges of an individual polygon intersect themselves, the resulting polygons might be partly filled. In that case, it is better to divide the patch object into smaller polygons.

When you specify `Y`, the `patch` function sets the YData property for the patch object to the same value. The patch object automatically calculates the face and vertex data and sets the Faces and Vertices properties to the appropriate values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Z` — *z*-coordinates for vertices

vector | matrix

z-coordinates for the vertices, specified in one of these forms:

- Vector — Create one polygon.
- Matrix — Create `m` polygons with `n` vertices each, where `[m,n] = size(Z)`. Each column in the matrix corresponds to one polygon.

When you specify `Z`, the `patch` function sets the ZData property for the patch object to the same value. The patch object automatically calculates the face and vertex data and sets the Faces and Vertices properties to the appropriate values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`C` — Polygon colors

scalar | vector | matrix | character vector of color name

Polygon colors, specified as a scalar, vector, matrix, or a character vector of a color name. The format of the input determines whether all polygons have the same color, one color per face, or interpolated face colors.

Desired Effect	Use One of These Formats	Results
Single color for all faces	• Color name, for example, `'r'` for red. • RGB triplet, for example, `[0 .5 .5]`. • Scalar value, for example, `2`. The CDataMapping property determines how the value maps into the colormap. For an example, see "Specifying Coordinates" on page 1-8291.	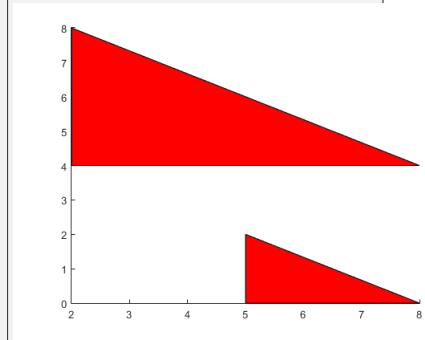 • Sets the FaceColor property to the specified color.

Desired Effect	Use One of These Formats	Results
One color per face	• `n`-by-1 vector of colormap colors, where `n` is the number of faces. The `CDataMapping` property determines how the values map into the colormap. • `n`-by-`1`-by-`3` array of RGB values. The first page of the array defines the red components of the colors, the second page defines the blue, and the third page defines the green. For an example, see "Different Polygon Face Colors" on page 1-8295.	 • Sets the FaceColor property to `'flat'`. • Sets the CData and FaceVertexCData properties using the specified color values.
Interpolated face colors	• `m`-by-`n` matrix of colormap values, where `[m,n] = size(X)`. Specify one color per vertex. • `m`-by-`n`-by-`3` array of RGB values. For an example, see "Interpolated Polygon Face Colors" on page 1-8297.	 • Sets the FaceColor property to `'interp'`. • Sets the CData and FaceVertexCData properties using the specified color values.

V — Polygon vertices

two-column or three-column matrix

Polygon vertices, specified in one of these forms:

- Two-column matrix — Each row contains the (*x*,*y*) coordinates for a vertex.
- Three-column matrix — Each row contains the (*x*,*y*,*Z*) coordinates for a vertex.

Specify only unique vertices. You can refer to a vertex more than once when defining the face definitions in `F`.

When you specify `V`, the `patch` function sets the Vertices property for the patch object to the same value. The patch object automatically calculates the coordinate data and sets the `XData`, `YData`, and `ZData` to the appropriate values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

F — Face definitions

row vector | matrix

Face definitions, specified in one of these forms:

- Row vector — Create a single polygon.
- Matrix — Create multiple polygons where each row corresponds to a polygon.

For example, this code defines three vertices in `V` and creates one polygon by connecting vertex 1 to 2, 2 to 3, and 3 to 1.

```
V = [1 1; 2 1; 2 2];
F = [1 2 3 1];
patch('Faces',F,'Vertices',V)
```

When you specify `F`, the `patch` function sets the Faces property for the patch object to the same value. The patch object automatically calculates the coordinate data and sets the `XData`, `YData`, and `ZData` to the appropriate values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

S — Patch definition

structure

Patch definition, specified as a structure with fields that correspond patch property names and field values that correspond to patch property values.

ax — Axes object
axes object

Axes object. If you do not specify an axes object, then `patch` uses the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `patch(x,y,c,'FaceAlpha',.5,'LineStyle',':')` creates semitransparent polygons with dotted edges.

The properties listed here are only a subset of patch properties. For a complete list, see Patch Properties.

`'FaceColor'` — Face color
`[0 0 0]` (default) | RGB triplet | character vector of color name | `'flat'` | `'interp'` | `'none'`

Face color, specified as one of these values:

- RGB triplet or character vector of color name — Single color for all of the faces. See the following table for more details.
- `'flat'` — Uniform face colors. First, specify `CData` or `FaceVertexCData` as an array containing one color per face or one color per vertex. If you specify a color for each vertex, then the color of the first vertex specified determines the face color.
- `'interp'` — Interpolate the color across each face. First, specify `CData` or `FaceVertexCData` as an array containing one value per vertex. Determine the face colors by using a bilinear interpolation of the values at each vertex.
- `'none'` — No faces displayed.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

'FaceAlpha' — Face transparency

1 (default) | scalar in range [0,1] | 'flat' | 'interp'

Face transparency, specified as one of these values:

- Scalar in range [0,1] — Use uniform transparency across all of the faces. A value of 1 is fully opaque and 0 is completely transparent. This option does not use the transparency values in the FaceVertexAlphaData property.
- 'flat' — Use a different transparency for each face based on the values in the FaceVertexAlphaData property. First you must specify the FaceVertexAlphaData property as a vector containing one transparency value per face or vertex. The transparency value at the first vertex determines the transparency for the entire face.
- 'interp' — Use interpolated transparency for each face based on the values in FaceVertexAlphaData property. First you must specify the FaceVertexAlphaData property as a vector containing one transparency value per vertex. The transparency varies across each face by interpolating the values at the vertices.

'EdgeColor' — Edge colors

[0 0 0] (default) | 'none' | 'flat' | 'interp' | RGB triplet | character vector of color name

Edge colors, specified as one of the values in this table. The default edge color is black with an RGB triplet value of [0 0 0]. If multiple polygons share an edge, then the first polygon drawn controls the displayed edge color.

Value	Description	Result
RGB triplet or a character vector of a color name	Single color for all of the edges. See the following table for more details.	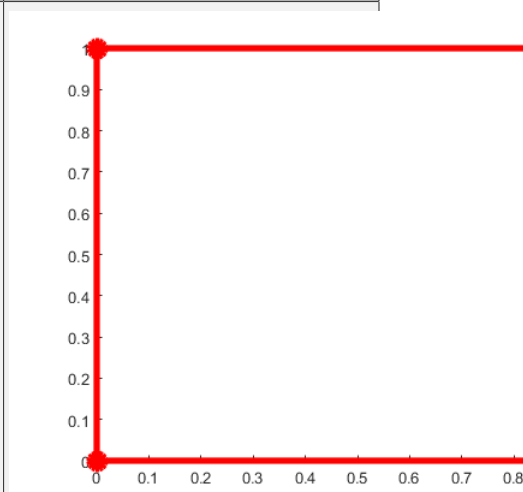
`'flat'`	Different color for each edge. Use the vertex colors to set the color of the edge that follows it. You must first specify `CData` or `FaceVertexCData` as an array containing one color per vertex. The edge color depends on the order in which you specify the vertices.	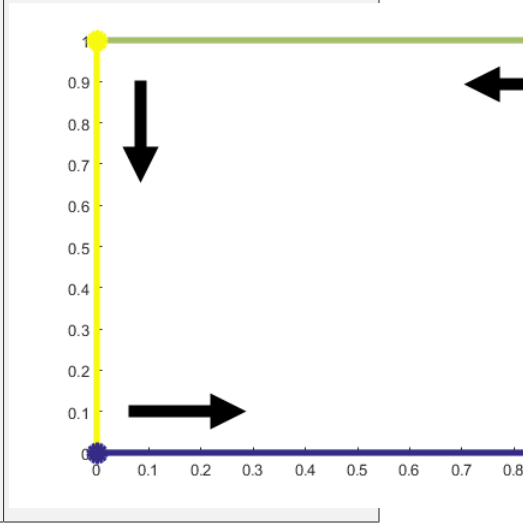

Value	Description	Result
`'interp'`	Interpolated edge color. You must first specify `CData` or `FaceVertexCData` as an array containing one color per vertex. Determine the edge color by linearly interpolating the values at the two bounding vertices.	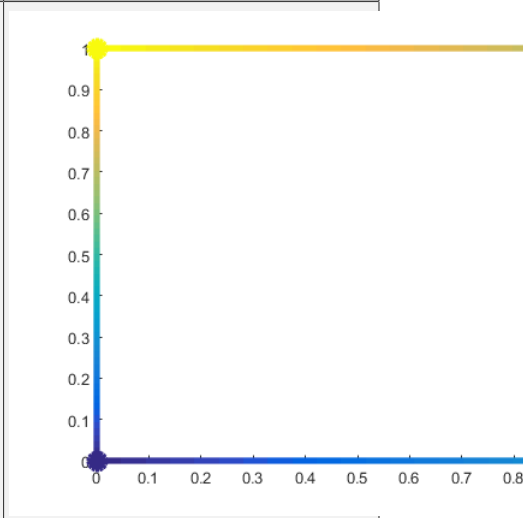
`'none'`	No edges displayed.	No edges displayed.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`'LineStyle'` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

Output Arguments

p — patch object
scalar

Patch object, returned as a scalar. Each patch object can consist of one or more polygons. Use `p` to query or change properties of the patch object after it is created.

See Also

See Also

Functions
`area` | `fill` | `fill3`

Properties
Patch Properties

Topics
"Multifaceted Patches"
"How Patch Data Relates to a Colormap"
"Differences Between Colormaps and Truecolor"

Introduced before R2006a

Patch Properties

Control patch appearance and behavior

Description

`Patch` properties control the appearance and behavior of `Patch` objects. By changing property values, you can modify certain aspects of the patch.

Starting in R2014b, you can use dot notation to query and set properties.

```
p = patch;
c = p.CData;
p.CDataMapping = 'scaled';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Faces

`FaceColor` — Face color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'flat'` | `'interp'` | `'none'`

Face color, specified as one of these values:

- RGB triplet or character vector of color name — Single color for all of the faces. See the following table for more details.
- `'flat'` — Uniform face colors. First, specify `CData` or `FaceVertexCData` as an array containing one color per face or one color per vertex. If you specify a color for each vertex, then the color of the first vertex specified determines the face color.
- `'interp'` — Interpolate the color across each face. First, specify `CData` or `FaceVertexCData` as an array containing one value per vertex. Determine the face colors by using a bilinear interpolation of the values at each vertex.
- `'none'` — No faces displayed.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

FaceAlpha — Face transparency

1 (default) | scalar in range [0,1] | 'flat' | 'interp'

Face transparency, specified as one of these values:

- Scalar in range [0,1] — Use uniform transparency across all of the faces. A value of 1 is fully opaque and 0 is completely transparent. This option does not use the transparency values in the FaceVertexAlphaData property.
- 'flat' — Use a different transparency for each face based on the values in the FaceVertexAlphaData property. First you must specify the FaceVertexAlphaData property as a vector containing one transparency value per face or vertex. The transparency value at the first vertex determines the transparency for the entire face.
- 'interp' — Use interpolated transparency for each face based on the values in FaceVertexAlphaData property. First you must specify the FaceVertexAlphaData property as a vector containing one transparency value per vertex. The transparency varies across each face by interpolating the values at the vertices.

FaceLighting — Effect of light objects on faces

'flat' (default) | 'gouraud' | 'none'

Effect of light objects on faces, specified as one of these values:

- `'flat'` — Apply light uniformly across each face. Use this value to view faceted objects.
- `'gouraud'` — Vary the light across the faces. Calculate the light at the vertices and then linearly interpolate the light across the faces. Use this value to view curved surfaces.
- `'none'` — Do not apply light from light objects to the faces.

To add a light object to the axes, use the `light` function.

Note: The `'phong'` value has been removed. Use `'gouraud'` instead.

`BackFaceLighting` — Face lighting when normals point away from camera

`'reverselit'` (default) | `'unlit'` | `'lit'`

Face lighting when the vertex normals point away from camera, specified as one of these values:

- `'reverselit'` — Light the face as if the vertex normal pointed towards the camera.
- `'unlit'` — Do not light the face.
- `'lit'` — Light the face according to the vertex normal.

Use this property to discriminate between the internal and external surfaces of an object. For an example, see “Back Face Lighting”.

Edges

`EdgeColor` — Edge colors

`[0 0 0]` (default) | `'none'` | `'flat'` | `'interp'` | RGB triplet | character vector of color name

Edge colors, specified as one of the values in this table. The default edge color is black with an RGB triplet value of `[0 0 0]`. If multiple polygons share an edge, then the first polygon drawn controls the displayed edge color.

Value	Description	Result
RGB triplet or a character vector of a color name	Single color for all of the edges. See the following table for more details.	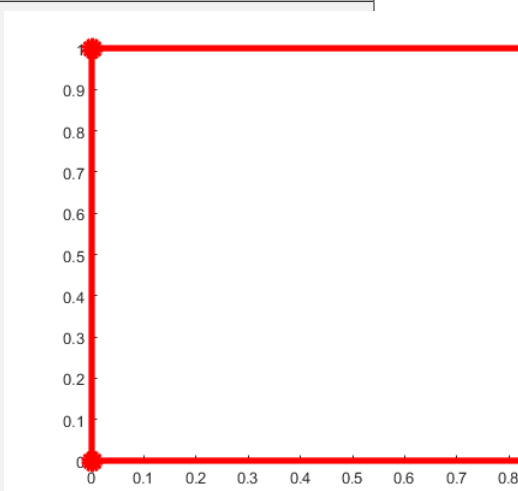
`'flat'`	Different color for each edge. Use the vertex colors to set the color of the edge that follows it. You must first specify `CData` or `FaceVertexCData` as an array containing one color per vertex. The edge color depends on the order in which you specify the vertices.	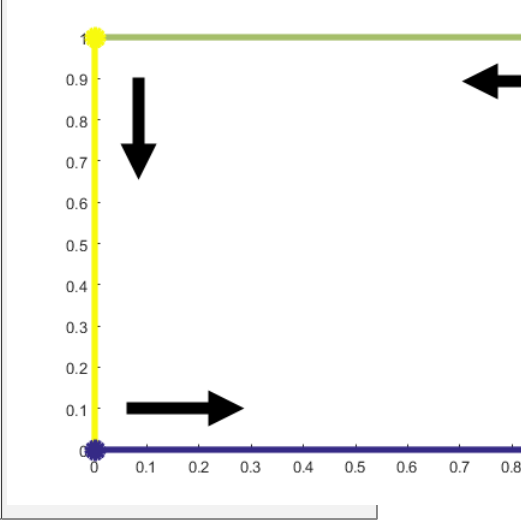

Value	Description	Result
`'interp'`	Interpolated edge color. You must first specify `CData` or `FaceVertexCData` as an array containing one color per vertex. Determine the edge color by linearly interpolating the values at the two bounding vertices.	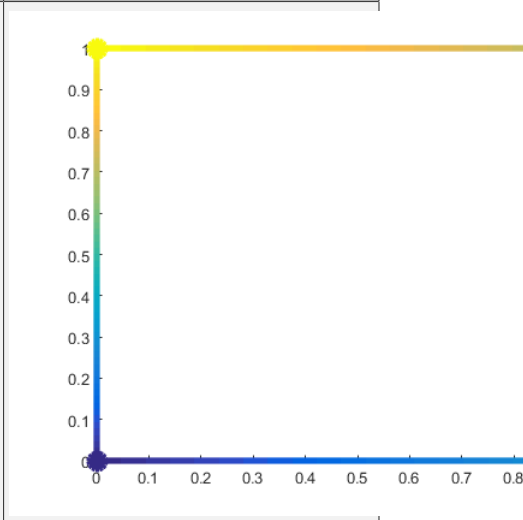
`'none'`	No edges displayed.	No edges displayed.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`EdgeAlpha` — Edge line transparency

1 (default) | scalar value in range `[0,1]` | `'flat'` | `'interp'`

Edge line transparency, specified as one of these values:

- Scalar value in range `[0,1]` — Use uniform transparency across all of the edges. A value of `1` is fully opaque and `0` is completely transparent. This option does not use the transparency values in the `FaceVertexAlphaData` property.
- `'flat'` — Use a different transparency for each edge based on the values in the `FaceVertexAlphaData` property. First you must specify the `FaceVertexAlphaData` property as a vector containing one transparency value per face or vertex. The transparency value at the first vertex determines the transparency for the edge.
- `'interp'` — Use interpolated transparency for each edge based on the values in `FaceVertexAlphaData` property. First you must specify the `FaceVertexAlphaData` property as a vector containing one transparency value per vertex. Vary the transparency across each edge by interpolating the values at the vertices.

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`EdgeLighting` — Effect of light objects on edges

`'none'` (default) | `'flat'` | `'gouraud'`

Effect of light objects on edges, specified as one of these values:

- `'flat'` — Apply light uniformly across the each edges.
- `'none'` — Do not apply lights from light objects to the edges.
- `'gouraud'` — Calculate the light at the vertices, and then linearly interpolate across the edges.

Note: The `'phong'` value has been removed. Use `'gouraud'` instead.

`AlignVertexCenters` — Sharp vertical and horizontal lines

`'off'` (default) | `'on'`

Sharp vertical and horizontal lines, specified as `'off'` or `'on'`.

If the associated figure has a GraphicsSmoothing property set to `'on'` and a Renderer property set to `'opengl'`, then the figure applies a smoothing technique to plots. In some cases, this smoothing technique can cause vertical and horizontal lines to appear uneven in thickness or color. Use the `AlignVertexCenters` property to eliminate the uneven appearance.

- `'off'` — Do not sharpen vertical or horizontal lines. The lines might appear uneven in thickness or color.
- `'on'` — Sharpen vertical and horizontal lines to eliminate an uneven appearance.

Note: You must have a graphics card that supports this feature. To see if the feature is supported, type `opengl info`. If it is supported, then the returned fields contain the line `SupportsAlignVertexCenters: 1`.

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'*'` | `...`

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | `'flat'` | RGB triplet | character vector of color name

Marker outline color, specified as specified as one of these values:

- `'auto'` — Use the same color as the `EdgeColor` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- `'flat'` — Use the `CData` value at the vertex to set the color.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

MarkerFaceColor — Marker fill color

'none' (default) | 'auto' | 'flat' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which allows the background to show through.
- 'auto' — Use the same color as the Color property for the axes.
- 'flat' — Use the CData value of the vertex to set the color.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]

Long Name	Short Name	RGB Triplet
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

This property affects only the circle, square, diamond, pentagram, hexagram, and the four triangle marker types.

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Example:

`MarkerSize` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

Color and Transparency Mapping

`FaceVertexCData` — Face and vertex colors

[ ] (default) | single color for entire patch | one color per face | one color per vertex

Face and vertex colors, specified as a single color for the entire patch, one color per face, or one color per vertex for interpolated face color.

If you want to use indexed colors, then specify `FaceVertexCData` in one of these forms:

- For one color for the entire patch, use a single value.
- For one color per face, use an m-by-1 column vector, where m is the number of rows in the `Faces` property.
- For interpolated face color, use an m-by–1 column vector where m is the number of rows in the `Vertices` property.

If you want to use true colors, then specify `FaceVertexCData` in one of these forms:

- For one color for the entire patch, use a three-element row vector defining an RGB triplet.
- For one color per face, use an m-by-3 array of RGB triplets, where m is the number of rows in the `Faces` property.

- For interpolated face color, use an m-by-3 array, where m is the number of rows in the `Vertices` property.

The following diagram illustrates the various forms of the `FaceVertexCData` property for a patch having eight faces and nine vertices. The `CDataMapping` property determines how MATLAB interprets the `FaceVertexCData` property when you specify indexed colors.

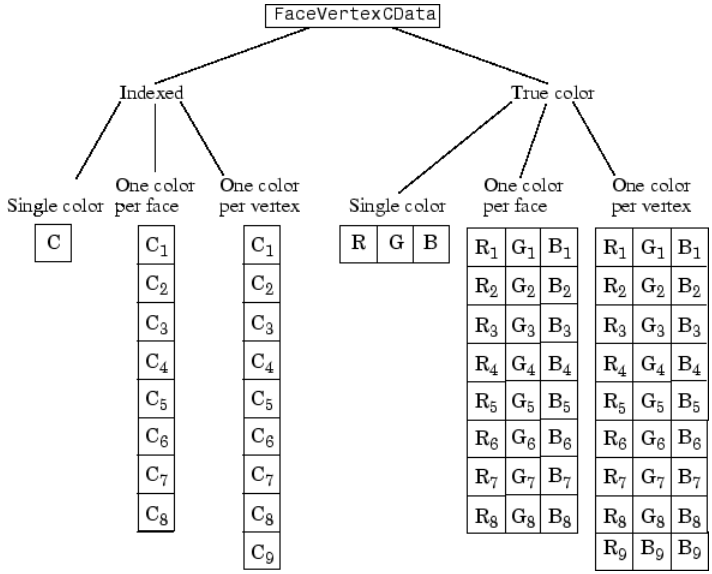

`CData` — Patch color data

single color for entire patch | one color per face | one color per vertex

Patch color data, specified as a single color for the entire patch, one color per face, or one color per vertex.

The way the `patch` function interprets `CData` depends on the type of data supplied. Specify `CData` in one of these forms:

- Numeric values that are scaled to map linearly into the current colormap.
- Integer values that are used directly as indices into the current colormap.
- Arrays of RGB triplets. RGB triplets are not mapped into the current colormap, but interpreted as the colors defined.

The following diagrams illustrate the dimensions of `CData` with respect to the arrays in the `XData`, `YData`, and `ZData` properties.

These diagrams illustrates the use of indexed color.

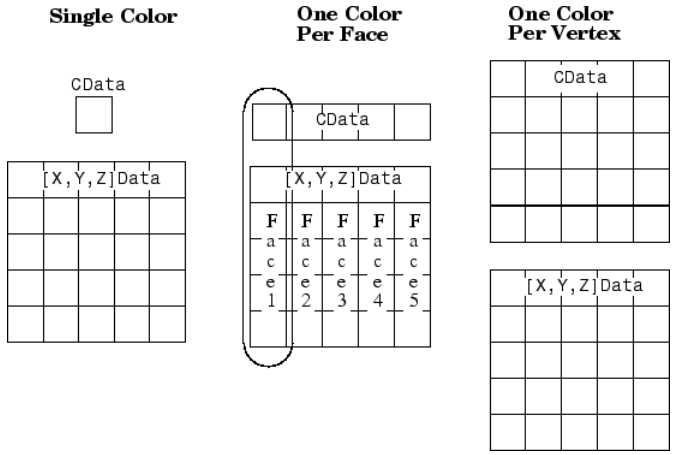

These diagrams illustrates the use of true color. True color requires either a single RGB triplet or an array of RGB triplets.

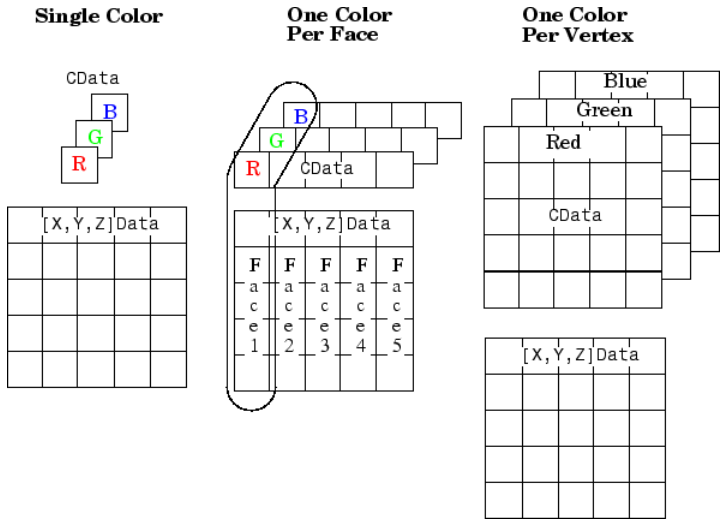

If `CData` contains NaNs, then `patch` does not color the faces.

An alternative method for defining patches uses the Faces, Vertices, and FaceVertexCData properties.

Example: `[1,0,0]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`CDataMapping` — Direct or scaled color data mapping

`'scaled'` (default) | `'direct'`

Direct or scaled color data mapping, specified as `'scaled'` (the default) or `'direct'`. The `CData` and `FaceVertexCData` properties contains color data. If you use true color specification for `CData` or `FaceVertexCData`, then this property has no effect.

- `'direct'` — Interpret the values as indices into the current colormap. Values with a decimal portion are fixed to the nearest lower integer.
  - If the values are of type `double` or `single`, then values of `1` or less map to the first color in the colormap. Values equal to or greater than the length of the colormap map to the last color in the colormap.
  - If the values are of type `uint8`, `uint16`, `uint32`, `uint64` , `int8`, `int16`, `int32`, or `int64`, then values of `0` or less map to the first color in the colormap. Values equal to or greater than the length of the colormap map to the last color in the colormap (or up to the range limits of the type).
  - If the values are of type `logical`, then values of `0` map to the first color in the colormap and values of `1` map to the second color in the colormap.
- `'scaled'` — Scale the values to range between the minimum and maximum color limits. The CLim property of the axes contains the color limits.

`FaceVertexAlphaData` — Face and vertex transparency values

`[ ]` (default) | scalar | vector with one value per face | vector with one value per vertex

Face and vertex transparency values, specified as a scalar, a vector with one value per face, or a vector with one value per vertex.

- For uniform transparency across all of the faces or edges, specify a scalar value. Then, set the `FaceAlpha` or `EdgeAlpha` property to `'flat'`.
- For a different transparency for each face or edge, specify an `m`-by-1 vector, where `m` is the number of faces. Then, set the `FaceAlpha` or `EdgeAlpha` property to `'flat'`. To determine the number of faces, query the number of rows in the `Faces` property.

- For interpolated transparency across each face or edge, specify an `n`-by-1 vector, where `n` is the number of vertices. Then, set the `FaceAlpha` or `EdgeAlpha` property to `'interp'`. To determine the number of faces, query the number of rows in the `Vertices` property.

The `AlphaDataMapping` property determines how the patch interprets the `FaceVertexAlphaData` property values.

Note: If the `FaceAlpha` and `EdgeAlpha` properties are both set to scalar values, then the patch does not use the `FaceVertexAlphaData` values.

`AlphaDataMapping` — Interpretation of `FaceVertexAlphaData` values

`'scaled'` (default) | `'direct'` | `'none'`

Interpretation of `FaceVertexAlphaData` values, specified as one of these values:

- `'none'` — Interpret the values as transparency values. A value of 1 or greater is completely opaque, a value of 0 or less is completely transparent, and a value between 0 and 1 is semitransparent.
- `'scaled'` — Map the values into the figure's alphamap. The minimum and maximum alpha limits of the axes determine the alpha data values that map to the first and last elements in the alphamap, respectively. For example, if the alpha limits are `[3 5]`, then alpha data values less than or equal to `3` map to the first element in the alphamap. Alpha data values greater than or equal to `5` map to the last element in the alphamap. The ALim property of the axes contains the alpha limits. The Alphamap property of the figure contains the alphamap.
- `'direct'` — Interpret the values as indices into the figure's alphamap. Values with a decimal portion are fixed to the nearest lower integer.
  - If the values are of type `double` or `single`, then values of 1 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap.
  - If the values are of integer type, then values of 0 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap (or up to the range limits of the type). The integer types are `uint8`, `uint16`, `uint32`, `uint64` , `int8`, `int16`, `int32`, and `int64`.

- If the values are of type `logical`, then values of 0 map to the first element in the alphamap and values of 1 map to the second element in the alphamap.

Face and Vertex Normals

`FaceNormals` — Face normal vectors

m-by-n-by-3 array (default) | array of normal vectors

Face normal vectors, specified as an array of normal vectors with one normal vector one per patch face. Define one normal per patch face, as determined by the size of the `Faces` property value. Face normals determine the orientation of each patch face. This data is used for lighting calculations.

Specifying values for this property sets the associated mode to manual. If you do not specify normal vectors, then the patch generates this data when the axes contains light objects. The patch computes face normals using Newell's method.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`VertextNormals` — Vertex normal vectors

m-by-n-by-3 array (default) | array of normal vectors

Vertex normal vectors, specified as an array of normal vectors with one normal vector one per patch vertex. Define one normal per patch vertex, as determined by the size of the `Vertices` property value. Vertex normals determine the shape and orientation of the patch. This data is used for lighting calculations.

Specifying values for this property sets the associated mode to manual. If you do not specify normal vectors, then the patch generates this data when the axes contains light objects.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`FaceNormalsMode` — Selection mode for `FaceNormals`

`'auto'` (default) | `'manual'`

Selection mode for `FaceNormals`, specified as one of these values:

- `'auto'` — The `patch` function calculates face normals when you add a light to the scene.

- `'manual'` — Use the face normal data specified by the `FaceNormals` property. Assigning values to the `FaceNormals` property sets `FaceNormalsMode` to `'manual'`.

`VertexNormalsMode` — Selection mode for `VertexNormals`
`'auto'` (default) | `'manual'`

Selection mode for `VertexNormals`, specified as one of these values:

- `'auto'` — The `patch` function calculates vertex normals when you add a light to the scene.
- `'manual'` — Use the vertex normal data specified by the `VertexNormals` property. Assigning values to the `VertexNormals` property sets `VertexNormalsMode` to `'manual'`.

Ambient Lighting

`AmbientStrength` — Strength of ambient light
`0.3` (default) | scalar in range `[0,1]`

Strength of ambient light, specified as a scalar value in the range `[0,1]`. Ambient light is a nondirectional light that illuminates the entire scene. There must be at least one visible light object in the axes for the ambient light to be visible.

The AmbientLightColor property for the axes sets the color of the ambient light. The color is the same for all objects in the axes.

Example: `0.5`

Data Types: `double`

`DiffuseStrength` — Strength of diffuse light
`0.6` (default) | scalar in range `[0,1]`

Strength of diffuse light, specified as a scalar value in the range `[0,1]`. Diffuse light is the nonspecular reflectance from light objects in the axes.

Example: `0.3`

Data Types: `double`

`SpecularStrength` — Strength of specular reflection
`0.9` (default) | scalar in range `[0,1]`

Strength of specular reflection, specified as a scalar value in the range `[0,1]`. Specular reflections are the bright spots on the surface from light objects in the axes.

Example: `0.3`

Data Types: `double`

`SpecularColorReflectance` — Color of specular reflections

1 (default) | scalar between 0 and 1 inclusive

Color of specular reflections, specified as a scalar between 0 and 1 inclusive.

- 0 — The color of the specular reflection depends on both the color of the object from which it reflects and the color of the light source.
- 1 — The color of the specular reflection depends only on the color or the light source (that is, the light object Color property).

The contributions from the light source color and the patch color to the specular reflection color vary linearly for values between 0 and 1.

Example: `0.5`

Data Types: `single` | `double`

`SpecularExponent` — Expansiveness of specular reflection

10 (default) | scalar value greater than 0

Expansiveness of specular reflection, specified as a scalar value greater than 0. `SpecularExponent` controls the size of the specular reflection spot. Greater values produce less specular reflection.

Most materials have exponents in the range of 5 to 20.

Example: `17`

Data Types: `double`

Data

`XData` — x-coordinates of the patch vertices

vector | matrix

The *x*-coordinates of the patch vertices, specified as a vector or a matrix. If `XData` is a matrix, then each column represents the *x*-coordinates of a single face of the patch. In this case, `XData`, `YData`, and `ZData` must have the same dimensions.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`YData` — y-coordinates of the patch vertices

vector | matrix

The *y*-coordinates defining the patch, specified as a vector or a matrix. If `YData` is a matrix, then each column represents the *y*-coordinates of a single face of the patch. In this case, `XData`, `YData`, and `ZData` must have the same dimensions.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`ZData` — z-coordinates of the patch vertices

vector | matrix

The *z*-coordinates of the patch vertices, specified as a vector or a matrix. If `ZData` is a matrix, then each column represents the *z*-coordinates of a single face of the patch. In this case, `XData`, `YData`, and `ZData` must have the same dimensions.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Faces` — Vertex connection defining each face

vector | matrix

Vertex connection defining each face, specified as a vector or a matrix defining the vertices in the `Vertices` property that are to be connected to form each face. The `Faces` and `Vertices` properties provide an alternative way to specify a patch that can be more efficient than using `XData`, `YData`, and `ZData` coordinates in most cases.

Each row in the faces array designates the connections for a single face, and the number of elements in that row that are not `NaN` defines the number of vertices for that face. Therefore, an m-by-n `Faces` array defines m faces with up to n vertices each.

For example, consider the following patch. It is composed of eight triangular faces defined by nine vertices. The corresponding `Faces` and `Vertices` properties are shown to the right of the patch. Note how some faces share vertices with other faces. For example, the fifth vertex (`V5`) is used six times, once each by faces one, two, three, six, seven, and eight. Without sharing vertices, this same patch requires `24` vertex definitions.

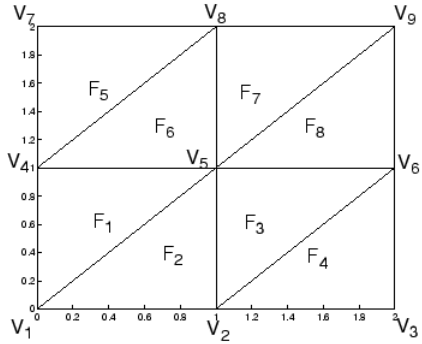

Faces property

F_1	V_1	V_4	V_5
F_2	V_1	V_5	V_2
F_3	V_2	V_5	V_6
F_4	V_2	V_6	V_3
F_5	V_4	V_7	V_8
F_6	V_4	V_8	V_5
F_7	V_5	V_8	V_9
F8	V_5	V_9	V_6

Vertices property

V_1	X_1	Y_1	Z_1
V_2	X_2	Y_2	Z_2
V_3	X_3	Y_3	Z_3
V_4	X_4	Y_4	Z_4
V_5	X_5	Y_5	Z_5
V_6	X_6	Y_6	Z_6
V_7	X_7	Y_7	Z_7
V_8	X_8	Y_8	Z_8
V_9	X_9	Y_9	Z_9

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Vertices` — Vertex coordinates

vector | matrix

Vertex coordinates, specified as a vector or a matrix defining the (*x*,*y*,*z*) coordinates of each vertex. The `Faces` and `Vertices` properties provide an alternative way to specify a patch that can be more efficient than using `XData`, `YData`, and `ZData` coordinates in most cases. See the Faces property for a description of how the vertex data is used.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects
`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`,

or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'patch'`

This property is read-only.

Type of graphics object, returned as `'patch'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Patch` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `Patch` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `Patch` object that has no color. The `HitTest` property determines if the `Patch` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Patch` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Patch` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Patch` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Patch` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback. Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Patch` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Patch` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`patch`

Topics
"Access Property Values"
"Graphics Object Properties"

path

View or change search path

Syntax

```
path
path('newpath')
path(path,'newpath')
path('newpath',path)
p = path
```

Description

`path` displays the MATLAB search path, which is stored in `pathdef.m`.

`path('newpath')` changes the search path to `newpath`, where `newpath` is a character array of folder names.

`path(path,'newpath')` adds the `newpath` folder to the end of the search path. If `newpath` is already on the search path, then `path(path,'newpath')` moves `newpath` to the end of the search path.

`path('newpath',path)` adds the `newpath` folder to the top of the search path. If `newpath` is already on the search path, then `path('newpath',path)` moves `newpath` to the top of the search path. To add multiple folders in one statement, instead use `addpath`.

`p = path` returns the search path to `p`.

Examples

Display the search path:

```
path
```

MATLAB returns, for example

```
MATLABPATH

 H:\My Documents\MATLAB
 C:\Program Files\MATLAB\R200nn\toolbox\matlab\general
 C:\Program Files\MATLAB\R200nn\toolbox\matlab\ops
 C:\Program Files\MATLAB\R200nn\toolbox\matlab\lang
 C:\Program Files\MATLAB\R200nn\toolbox\matlab\elmat
 C:\Program Files\MATLAB\R200nn\toolbox\matlab\elfun
...
```

`R200nn` represents the folder for the MATLAB release, for example, `R2009b`.

Add a new folder to the search path on Microsoft Windows platforms:

```
path(path,'c:/tools/goodstuff')
```

Add a new folder to the search path on UNIX[2] platforms:

```
path(path,'/home/tools/goodstuff')
```

Temporarily add the folder `my_files` to the search path, run `my_function` in `my_files`, then restore the previous search path:

```
p = path
path(p,'my_files')
my_function
path(p)
```

Alternatives

As an alternative to the `path` function, use the Set Path dialog box.

See Also

`addpath` | `cd` | `dir` | `genpath` | `matlabroot` | `pathsep` | `pathtool` | `rehash` | `restoredefaultpath` | `rmpath` | `savepath` | `startup` | `userpath` | `what`

Topics

"What Is the MATLAB Search Path?"

2. UNIX is a registered trademark of The Open Group in the United States and other countries.

"Files and Folders that MATLAB Accesses"

Introduced before R2006a

path2rc

Save current search path to `pathdef.m` file

Syntax

```
path2rc
```

Description

`path2rc` runs `savepath`. The `savepath` function is replacing `path2rc`. Use `savepath` instead of `path2rc` and replace instances of `path2rc` with `savepath`.

Introduced before R2006a

pathsep

Search path separator for current platform

Syntax

```
c = pathsep
```

Description

`c = pathsep` returns the search path separator character for this platform. The search path separator is the character that separates path names in the `pathdef.m` file, as returned by the `path` function. The character is a semicolon (`;`). For versions of MATLAB software earlier than version 7.7 (R2008b), the character on UNIX[3] platforms was a colon (`:`). Use `pathsep` to work programmatically with the content of the search path file.

See Also

`fileparts` | `filesep` | `fullfile` | `path`

Topics

"What Is the MATLAB Search Path?"

Introduced before R2006a

3. UNIX is a registered trademark of The Open Group in the United States and other countries.

pathtool

Open Set Path dialog box to view and change search path

Syntax

```
pathtool
```

Description

`pathtool` opens the Set Path dialog box, a graphical user interface you use to view and modify the MATLAB search path.

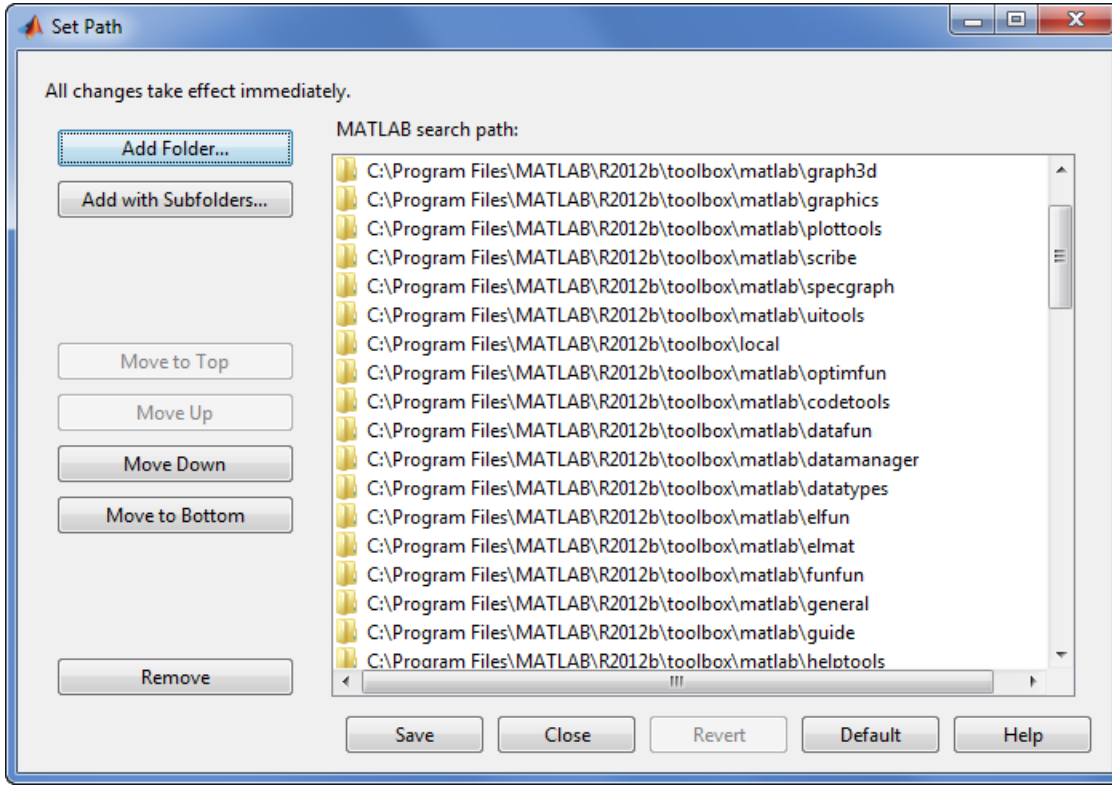

See Also

`addpath` | `cd` | `dir` | `genpath` | `matlabroot` | `path` | `pathsep` | `rehash` | `restoredefaultpath` | `rmpath` | `savepath` | `startup` | `what`

Topics

"What Is the MATLAB Search Path?"

Introduced before R2006a

pause

Stop MATLAB execution temporarily

Syntax

```
pause
```

```
pause(n)
```

```
pause(state)
oldState = pause(state)
```

Description

`pause` temporarily stops MATLAB execution and waits for the user to press any key. The `pause` function also temporarily stops the execution of Simulink models, but does not pause their repainting.

Note: If you previously disabled the pause setting, reenable it using `pause('on')` for this call to take effect.

`pause(n)` pauses execution for `n` seconds before continuing. Pausing must be enabled for this call to take effect.

`pause(state)` enables, disables, or displays the current pause setting.

`oldState = pause(state)` returns the current pause setting and sets the pause state as indicated by `state`. For example, if pausing is enabled, `oldState = pause('off')` returns `'on'` in `oldState` and disables pausing.

Examples

Pause Execution

Pause execution for 5 seconds. MATLAB blocks, or hides, the command prompt (>>) while it pauses execution.

```
n = 5;
pause(n)
```

Disable Pause Setting

Disable the pause setting and query the current state.

```
pause('off')
pause('query')
```

```
ans =
'off'
```

Pause execution for 100 seconds. Since the pause setting is off, MATLAB ignores the request to pause execution, and immediately returns the command prompt.

```
pause(100)
```

Enable the pause setting.

```
pause('on')
```

Save and Restore Pause State

Store the current pause setting and then disable the ability to pause execution.

```
oldState = pause('off')
```

```
oldState =
'on'
```

Query the current pause setting.

```
pause('query')
```

```
ans =
'off'
```

Restore the initial pause state.

```
pause(oldState)
pause('query')
```

```
ans =
'on'
```

Alternatively, you can store the queried value of the pause state and then disable the ability to pause execution.

```
oldState = pause('query');
pause('off')
```

Restore the initial pause state.

```
pause(oldState)
```

Input Arguments

n — Number of seconds

nonnegative, real number

Number of seconds to pause execution specified as a nonnegative, real number.

Typing `pause(inf)` puts you into an infinite loop. To return to the MATLAB prompt, type **Ctrl+C**.

Example: `pause(3)` pauses for 3 seconds.

Example: `pause(5/1000)` pauses for 5 milliseconds.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

state — Pause setting

`'on'` | `'off'` | `'query'`

Pause control indicator specified as `'on'`, `'off'`, or `'query'`. Use `'on'` or `'off'` to control whether the `pause` function is able to pause MATLAB execution. Use `'query'` to query the current state of the pause setting.

To run interactive code unattended, disable the pause setting.

Tips

- The accuracy of the `pause` function is subject to the scheduling resolution of your operating system, and to other concurrent system activity. The accuracy is not guaranteed, and finer resolution results in higher relative error.

- While MATLAB is paused, the following continue to execute:
  - Repainting of figure windows, Simulink block diagrams, and Java windows
  - HG callbacks from figure windows
  - Event handling from Java windows

See Also

See Also

`drawnow` | `input` | `keyboard`

Introduced before R2006a

pbaspect

Control relative lengths of each axis

Syntax

```
pbaspect(ratio)
pb = pbaspect
```

```
pbaspect auto
pbaspect manual
m = pbaspect('mode')
```

```
___ = pbaspect(ax, ___ )
```

Description

`pbaspect(ratio)` sets the plot box aspect ratio for the current axes. The plot box aspect ratio is the relative length of the *x*-axis, *y*-axis, and *z*-axis. Specify `ratio` as a three-element vector of positive values that represent the ratio of the *x*-axis, *y*-axis, and *z*-axis lengths. For example, `[3 1 1]` specifies that the length of the *x*-axis is equal to three times the length of the *y*-axis and *z*-axis. For equal axis lengths in all directions, use `[1 1 1]`.

`pb = pbaspect` returns the plot box aspect ratio for the current axes.

`pbaspect auto` sets an automatic mode, enabling the axes to choose the appropriate plot box aspect ratio. The mode must be automatic to enable the "stretch-to-fill" feature of the axes.

`pbaspect manual` sets a manual mode and uses the ratio stored in the `PlotBoxAspectRatio` property of the `Axes` object. When the mode is manual, it disables the stretch-to-fill feature of the axes. Specifying a value for the plot box aspect ratio sets the mode to manual.

`m = pbaspect('mode')` returns the current mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify the plot box aspect ratio or set the mode to manual.

`___ = pbaspect(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify the axes as the first input argument for any of the previous syntaxes. Use single quotes around the `'auto'` and `'manual'` inputs.

Examples

Use Equal Axis Lengths

Create a simple line plot. Make the *x*-axis, *y*-axis, and *z*-axis (not shown) equal lengths.

```
x = linspace(0,10);
y = sin(x);
plot(x,y)
pbaspect([1 1 1])
```

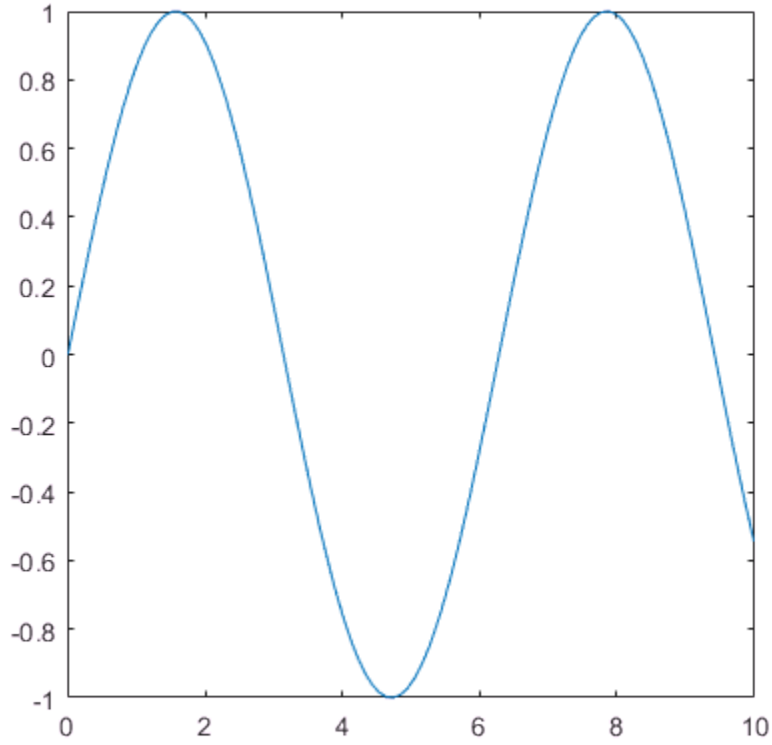

Use Different Axis Lengths

Plot a surface and make the *x*-axis twice as long as the *y*-axis and *z*-axis.

```
[x,y] = meshgrid(-2:.2:2);
z = x.*exp(-x.^2 - y.^2);
surf(x,y,z)
pbaspect([2 1 1])
```

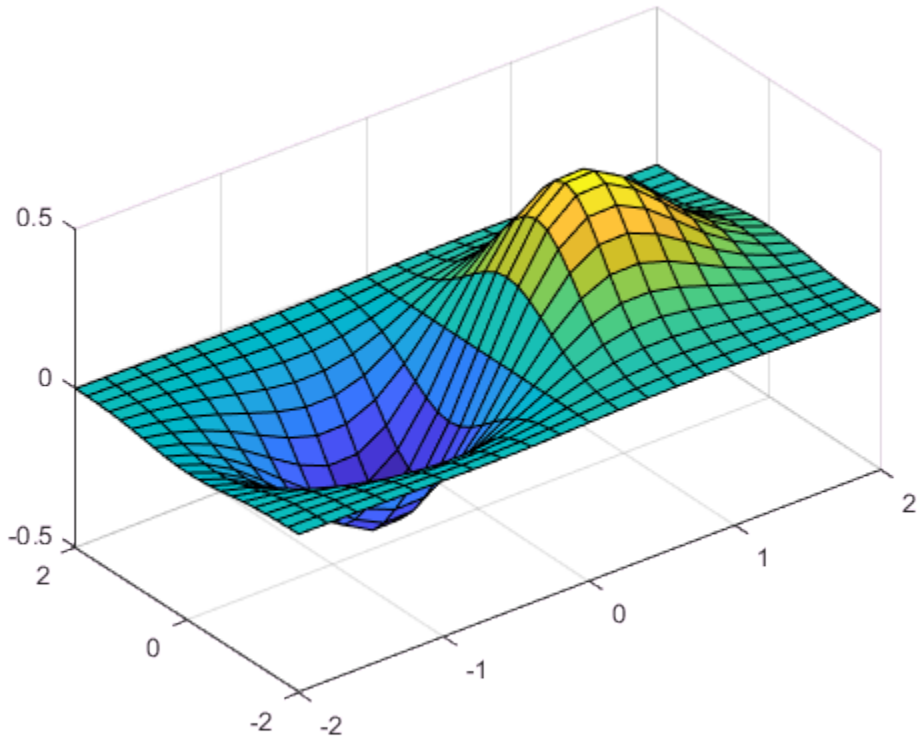

When you specify the plot box aspect ratio, the associated mode changes to manual. Query the current plot box aspect ratio mode.

```
m = pbaspect('mode')
```

```
m =
'manual'
```

Revert Back to Default Plot Box Aspect Ratio

Create a 3-D scatter chart of random data and set the plot box aspect ratio. Then revert back to the default plot box aspect ratio.

```
X = rand(100,1);
```

```
Y = rand(100,1);
Z = rand(100,1);
scatter3(X,Y,Z)
pbaspect([3 2 1])
```

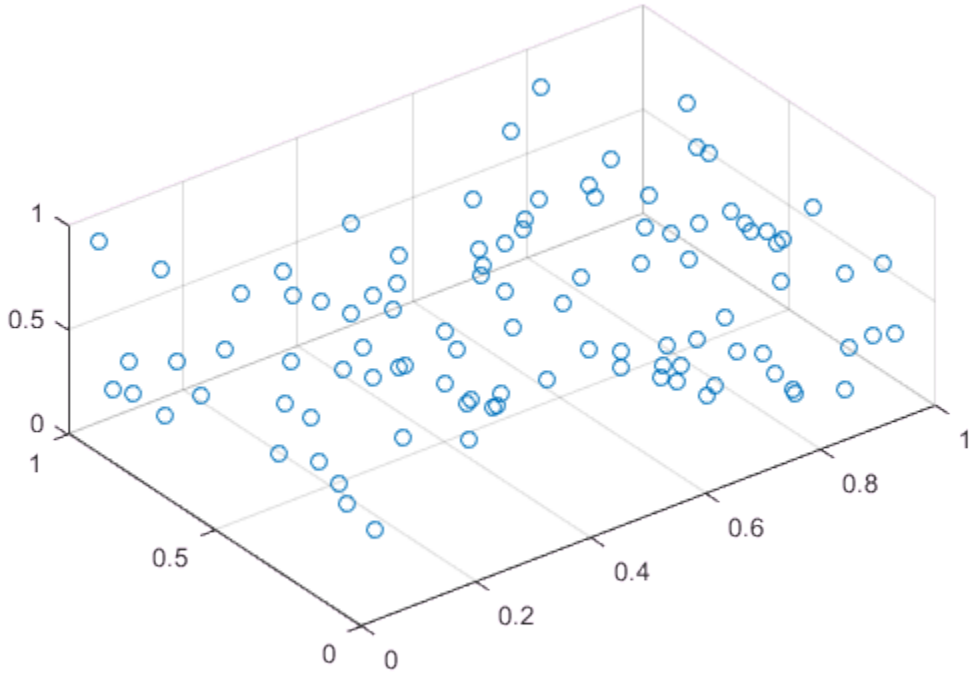


```
pbaspect auto
```

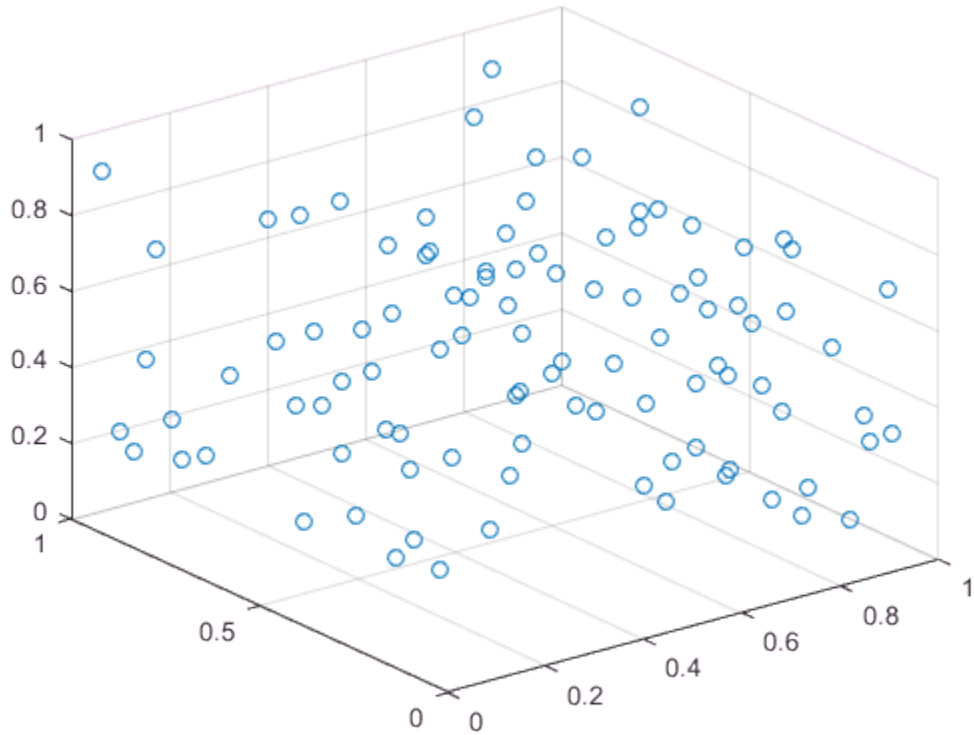

Query Plot Box Aspect Ratio

Create a surface plot.

```
[x,y] = meshgrid(-2:.2:2);
z = x.*exp(-x.^2 - y.^2);
surf(x,y,z)
```

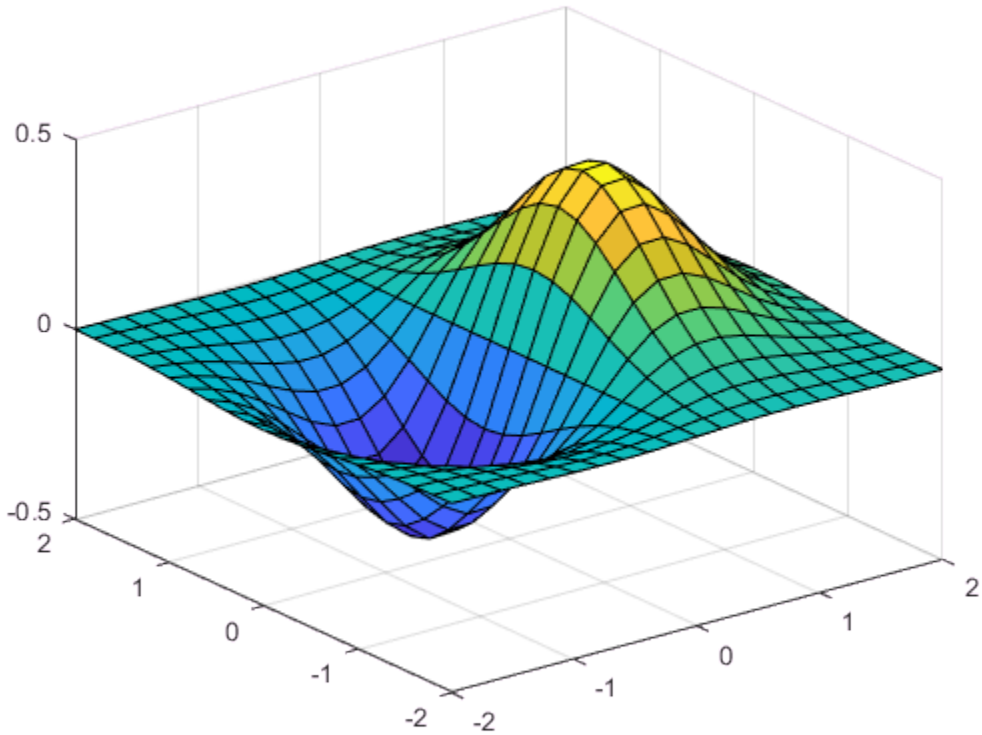

Query the plot box aspect ratio. The values indicate the ratio of the *x*-axis length to *y*-axis length to *z*-axis length.

```
pb = pbaspect
```

```
pb =

    1.0000    0.9419    0.8518
```

Set Plot Box Aspect Ratio for Specific Axes

Create a figure with two subplots and assign the `Axes` objects to the variables `ax1` and `ax2`. Set the plot box aspect ratio for lower subplot by specifying `ax2` as the first input argument to the `pbaspect` function.

```
ax1 = subplot(2,1,1);
mesh(peaks(20))

ax2 = subplot(2,1,2);
mesh(peaks(20))
pbaspect(ax2,[2 2 1])
```

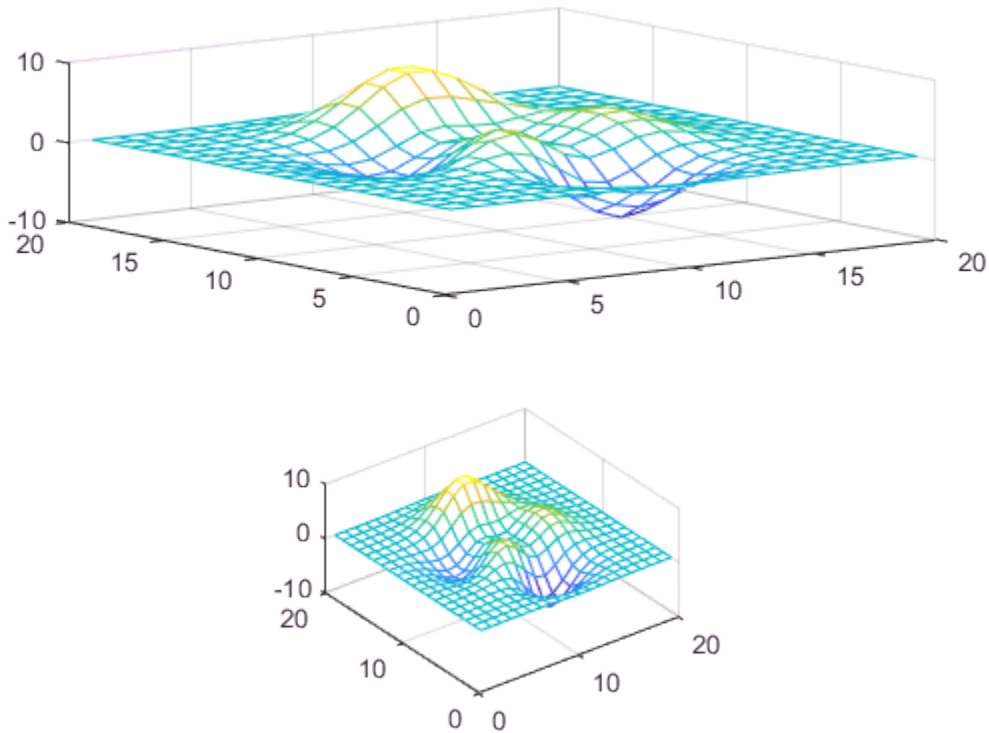

Input Arguments

`ratio` — Plot box aspect ratio

three-element vector

Plot box aspect ratio, specified as a three-element vector of positive values. For example, `pbaspect([3 2 1])` specifies that the ratio of the *x*-axis length to *y*-axis length to *z*-axis length is 3 to 2 to 1. Thus, the *x*-axis is the longest and the *z*-axis is the shortest.

Specifying the ratio sets the PlotBoxAspectRatio property for the `Axes` object to the specified value. The `PlotBoxAspectRatio` property interacts with the `DataAspectAspectRatio`, `XLim`, `YLim`, and `ZLim` properties to control the length and scale of the *x*-axis, *y*-axis, and *z*-axis.

Specifying the ratio sets the `PlotBoxAspectRatioMode` property to `'manual'` and disables the stretch-to-fill behavior of the axes.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`ax` — Target axes

`Axes` object

Target axes, specified as an `Axes` object. If you do not specify the axes, then `pbaspect` uses the current axes (`gca`).

Output Arguments

`pb` — Current plot box aspect ratio values

three-element vector

Current plot box aspect ratio, returned as a three-element vector of values representing the ratio of the *x*-axis, *y*-axis, and *z*-axis lengths.

Querying the plot box aspect ratio returns the PlotBoxAspectRatio property value for the `Axes` object.

`m` — Current plot box aspect ratio mode

`'auto'` | `'manual'`

Current plot box aspect ratio mode, returned as either `'auto'` or `'manual'`. When the mode is automatic, MATLAB determines the appropriate plot box aspect ratio value. If you specify a value, then the mode changes to manual.

Querying the plot box aspect ratio mode returns the PlotBoxAspectRatioMode property value for the `Axes` object.

Definitions

Stretch-to-Fill

When the "stretch-to-fill" behavior is enabled, MATLAB stretches the axes to fill the available space. The axes might not exactly match the data aspect ratio, plot box aspect ratio, and camera-view angle values stored in its `DataAspectRatio`, `PlotBoxAspectRatio`, and `CameraViewAngle` properties.

If you specify the data aspect ratio, plot box aspect ratio, or camera-view angle, then the "stretch-to-fill" behavior is disabled. When stretch-to-fill is disabled, MATLAB makes the axes as large as possible within the available space and strictly adheres to the property values so that there is no distortion. For more information, see "Control Axes Layout".

Algorithms

The `pbaspect` function sets and queries several axes properties related to the data aspect ratio.

- PlotBoxAspectRatio — Property that stores the plot box aspect ratio value.
- PlotBoxAspectRatioMode — Property that stores the plot box aspect ratio mode. When you set the ratio, this property changes to `'manual'`.

See Also

See Also

`axis` | `daspect` | `xlim` | `ylim` | `zlim`

Topics

"Control Ratio of Axis Lengths and Data Unit Lengths"

Introduced before R2006a

pcg

Preconditioned conjugate gradients method

Syntax

```
x = pcg(A,b)
pcg(A,b,tol)
pcg(A,b,tol,maxit)
pcg(A,b,tol,maxit,M)
pcg(A,b,tol,maxit,M1,M2)
pcg(A,b,tol,maxit,M1,M2,x0)
[x,flag] = pcg(A,b,...)
[x,flag,relres] = pcg(A,b,...)
[x,flag,relres,iter] = pcg(A,b,...)
[x,flag,relres,iter,resvec] = pcg(A,b,...)
```

Description

`x = pcg(A,b)` attempts to solve the system of linear equations `A*x=b` for `x`. The `n`-by-`n` coefficient matrix `A` must be symmetric and positive definite, and should also be large and sparse. The column vector `b` must have length `n`. You also can specify `A` to be a function handle, `afun`, such that `afun(x)` returns `A*x`.

"Parameterizing Functions" explains how to provide additional parameters to the function `afun`, as well as the preconditioner function `mfun` described below, if necessary.

If `pcg` converges, a message to that effect is displayed. If `pcg` fails to converge after the maximum number of iterations or halts for any reason, a warning message is printed displaying the relative residual `norm(b-A*x)/norm(b)` and the iteration number at which the method stopped or failed.

`pcg(A,b,tol)` specifies the tolerance of the method. If `tol` is `[]`, then `pcg` uses the default, `1e-6`.

`pcg(A,b,tol,maxit)` specifies the maximum number of iterations. If `maxit` is `[]`, then `pcg` uses the default, `min(n,20)`.

`pcg(A,b,tol,maxit,M)` and `pcg(A,b,tol,maxit,M1,M2)` use symmetric positive definite preconditioner `M` or `M = M1*M2` and effectively solve the system `inv(M)*A*x = inv(M)*b` for `x`. If `M` is `[]` then `pcg` applies no preconditioner. `M` can be a function handle `mfun` such that `mfun(x)` returns `M\x`.

`pcg(A,b,tol,maxit,M1,M2,x0)` specifies the initial guess. If `x0` is `[]`, then `pcg` uses the default, an all-zero vector.

`[x,flag] = pcg(A,b,...)` also returns a convergence flag.

Flag	Convergence
0	`pcg` converged to the desired tolerance `tol` within `maxit` iterations.
1	`pcg` iterated `maxit` times but did not converge.
2	Preconditioner `M` was ill-conditioned.
3	`pcg` stagnated. (Two consecutive iterates were the same.)
4	One of the scalar quantities calculated during `pcg` became too small or too large to continue computing.

Whenever `flag` is not `0`, the solution `x` returned is that with minimal norm residual computed over all the iterations. No messages are displayed if the `flag` output is specified.

`[x,flag,relres] = pcg(A,b,...)` also returns the relative residual `norm(b-A*x)/norm(b)`. If `flag` is `0`, `relres <= tol`.

`[x,flag,relres,iter] = pcg(A,b,...)` also returns the iteration number at which `x` was computed, where `0 <= iter <= maxit`.

`[x,flag,relres,iter,resvec] = pcg(A,b,...)` also returns a vector of the residual norms at each iteration including `norm(b-A*x0)`.

Examples

Using pcg with Large Matrices

This example shows how to use pcg with a matrix input and with a function handle.

```
n1 = 21;
A = gallery('moler',n1);
b1 = sum(A,2);
tol = 1e-6;
maxit = 15;
M1 = spdiags((1:n1)',0,n1,n1);
[x1,flag1,rr1,iter1,rv1] = pcg(A,b1,tol,maxit,M1);
```

Alternatively, you can use the following function in place of the matrix A:

```
function y = applyMoler(x)
y = x;
y(end-1:-1:1) = y(end-1:-1:1) - cumsum(y(end:-1:2));
y(2:end) = y(2:end) - cumsum(y(1:end-1));
```

By using this function, you can solve larger systems more efficiently as there is no need to store the entire matrix A:

```
n2 = 21;
b2 = applyMoler(ones(n2,1));
tol = 1e-6;
maxit = 15;
M2 = spdiags((1:n2)',0,n2,n2);
[x2,flag2,rr2,iter2,rv2] = pcg(@applyMoler,b2,tol,maxit,M2);
```

Using pcg with a Preconditioner

This example demonstrates how to use a preconditioner matrix with pcg.

Create an input matrix and try to solve the system with pcg.

```
A = delsq(numgrid('S',100));
b = ones(size(A,1),1);
[x0,fl0,rr0,it0,rv0] = pcg(A,b,1e-8,100);
```

fl0 is 1 because pcg does not converge to the requested tolerance of 1e-8 within the requested maximum 100 iterations. A preconditioner can make the system converge more quickly.

Use ichol with only one input argument to construct an incomplete Cholesky factorization with zero fill.

```
L = ichol(A);
```

```
[x1,fl1,rr1,it1,rv1] = pcg(A,b,1e-8,100,L,L');
```

`fl1` is `0` because `pcg` drives the relative residual to `9.8e-09` (the value of `rr1`) which is less than the requested tolerance of `1e-8` at the seventy-seventh iteration (the value of `it1`) when preconditioned by the zero-fill incomplete Cholesky factorization. `rv1(1) = norm(b)` and `rv1(78) = norm(b-A*x1)`.

The previous matrix represents the discretization of the Laplacian on a 100x100 grid with Dirichlet boundary conditions. This means that a modified incomplete Cholesky preconditioner might perform even better.

Use the `michol` option to create a modified incomplete Cholesky preconditioner.

```
L = ichol(A,struct('michol','on'));
[x2,fl2,rr2,it2,rv2] = pcg(A,b,1e-8,100,L,L');
```

In this case you attain convergence in only forty-seven iterations.

You can see how the preconditioners affect the rate of convergence of `pcg` by plotting each of the residual histories starting from the initial estimate (iterate number `0`).

```
figure;
semilogy(0:it0,rv0/norm(b),'b.');
hold on;
semilogy(0:it1,rv1/norm(b),'r.');
semilogy(0:it2,rv2/norm(b),'k.');
legend('No Preconditioner','IC(0)','MIC(0)');
xlabel('iteration number');
ylabel('relative residual');
hold off;
```

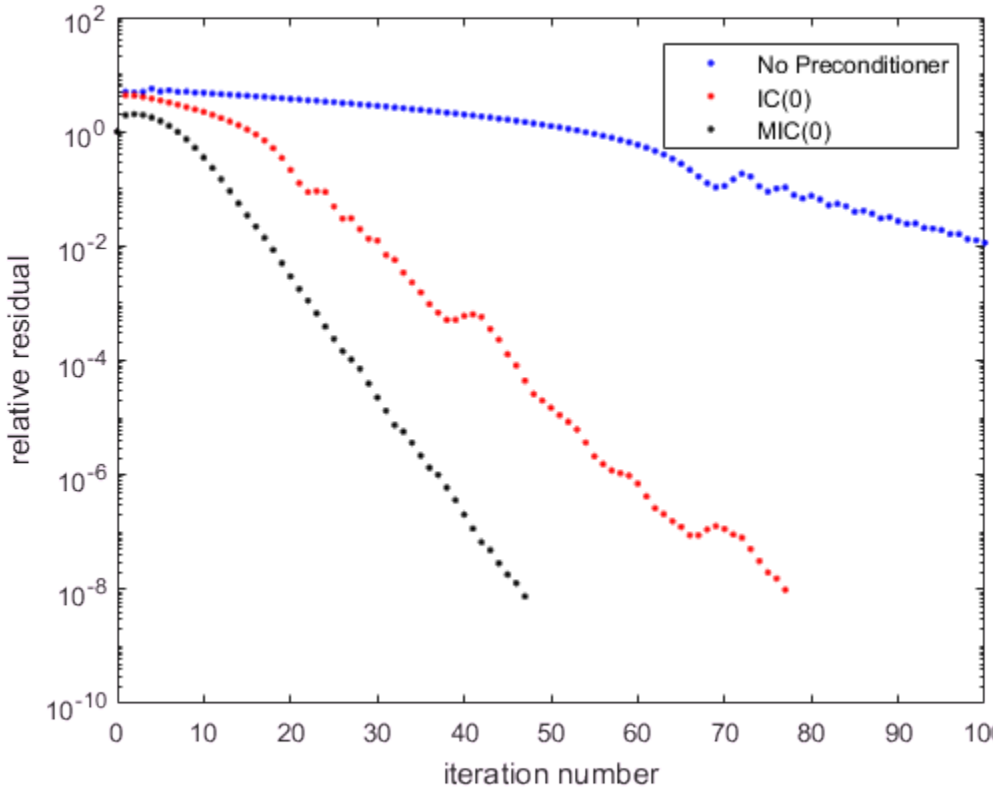

References

[1] Barrett, R., M. Berry, T. F. Chan, et al., *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*, SIAM, Philadelphia, 1994.

See Also

See Also

`bicg` | `bicgstab` | `cgs` | `gmres` | `ichol` | `lsqr` | `minres` | `mldivide` | `qmr` | `symmlq`

Topics

"Create Function Handle"

Introduced before R2006a

pchip

Piecewise Cubic Hermite Interpolating Polynomial (PCHIP)

Syntax

```
p = pchip(x,y,xq)
pp = pchip(x,y)
```

Description

`p = pchip(x,y,xq)` returns a vector of interpolated values `p` corresponding to the query points in `xq`. The values of `p` are determined by shape-preserving piecewise cubic interpolation of `x` and `y`.

`pp = pchip(x,y)` returns a piecewise polynomial structure for use with `ppval` and the spline utility `unmkpp`.

Examples

Data Interpolation Using `spline` and `pchip`

Compare the interpolation results produced by `spline` and `pchip` for two different functions.

Create vectors of `x` values, function values at those points `y`, and query points `xq`. Compute interpolations at the query points using both `spline` and `pchip`. Plot the interpolated function values at the query points for comparison.

```
x = -3:3;
y = [-1 -1 -1 0 1 1 1];
xq1 = -3:.01:3;
p = pchip(x,y,xq1);
s = spline(x,y,xq1);
plot(x,y,'o',xq1,p,'-',xq1,s,'-.')
```

```
legend('Sample Points','pchip','spline','Location','SouthEast')
```

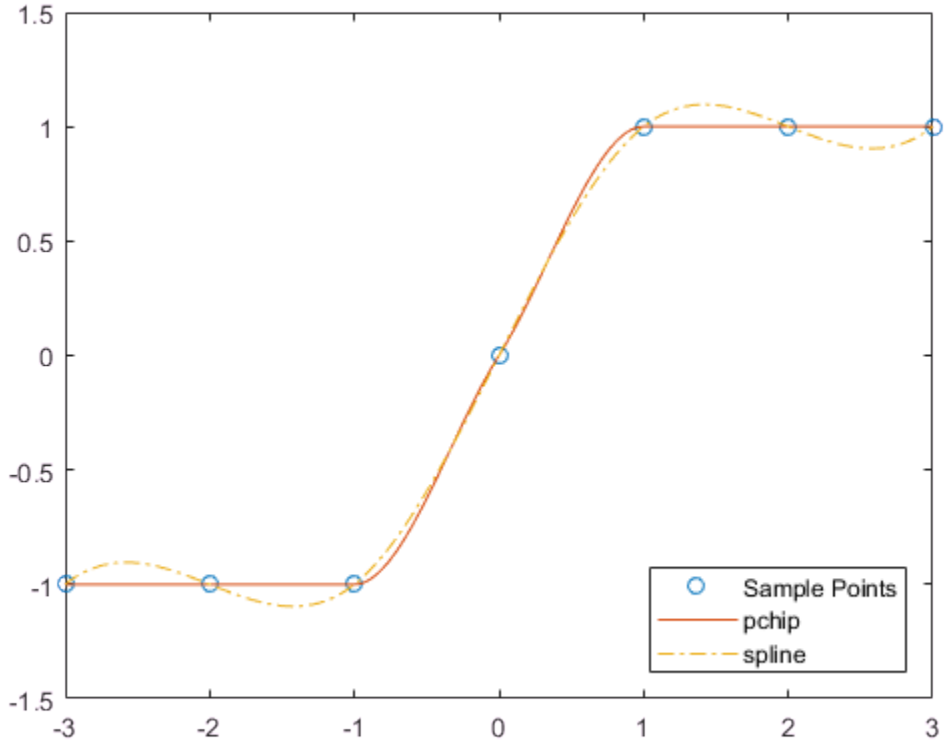

In this case, `pchip` is favorable since it does not oscillate as freely between the sample points.

Perform a second comparison using an oscillatory sample function.

```
x = 0:25;
y = besselj(1,x);
xq2 = 0:0.01:25;
p = pchip(x,y,xq2);
s = spline(x,y,xq2);
plot(x,y,'o',xq2,p,'-',xq2,s,'-.')
```

```
legend('Sample Points','pchip','spline')
```

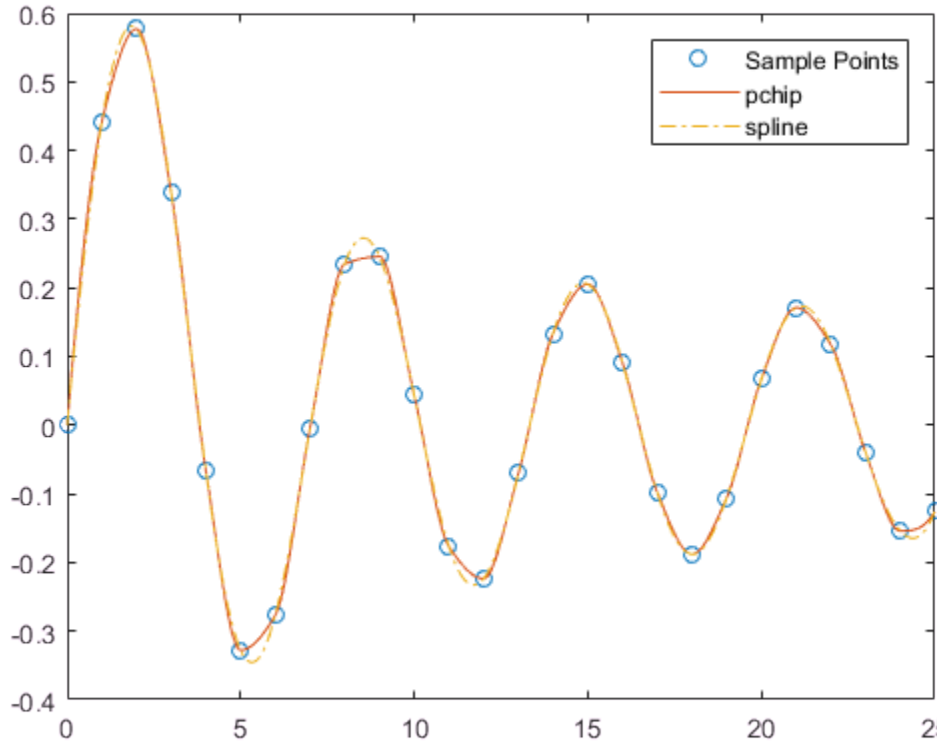

When the underlying function is oscillatory, `spline` captures the movement between points better than `pchip`.

Interpolation with Piecewise Polynomial Structure

Create vectors for the `x` values and function values `y`, and then use `pchip` to construct a piecewise polynomial structure.

```
x = -5:5;
y = [1 1 1 1 0 0 1 2 2 2 2];
p = pchip(x,y);
```

Use the structure with `ppval` to evaluate the interpolation at several query points. Plot the results.

```
xq = -5:0.2:5;
pp = ppval(p,xq);
plot(x,y,'o',xq,pp,'-.')
ylim([-0.2 2.2])
```

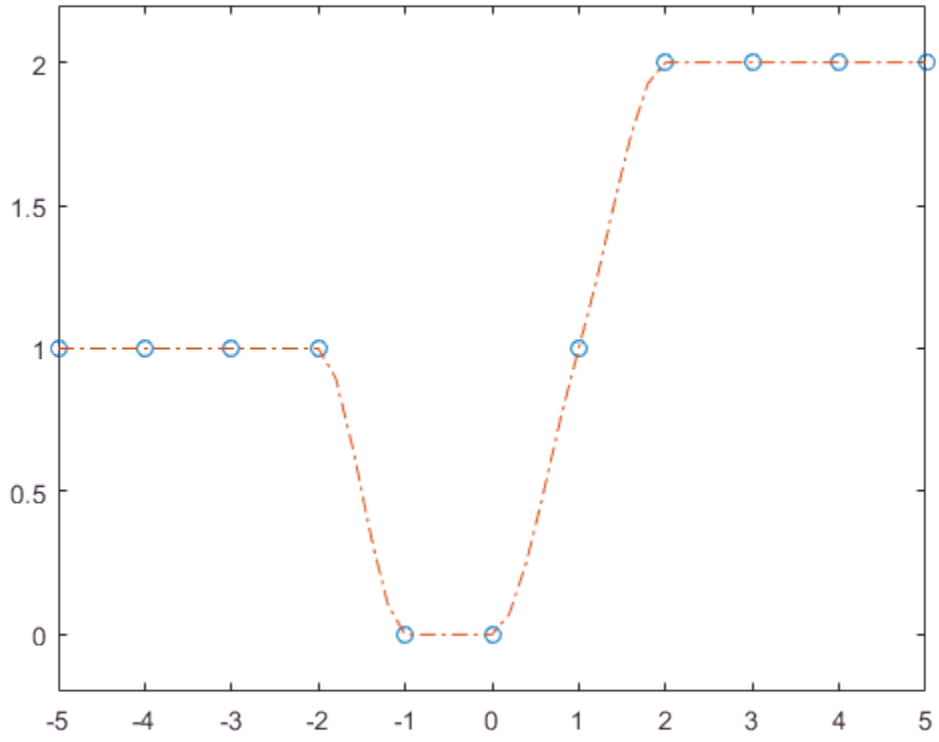

Input Arguments

x — Sample points

vector

Sample points, specified as a vector. The vector `x` specifies the points at which the data `y` is given. The elements of `x` must be unique.

Data Types: `single` | `double`

y — Function values at sample points

vector | matrix | array

Function values at sample points, specified as a numeric vector, matrix, or array. `x` and `y` must have the same length.

If `y` is a matrix or array, then the values in the last dimension, `y(:,...,:,j)`, are taken as the values to match with `x`. In that case, the last dimension of `y` must be the same length as `x`.

Data Types: `single` | `double`

xq — Query points

vector

Query points, specified as a vector. The points specified in `xq` are the *x*-coordinates for the interpolated function values `p` computed by `pchip`.

Data Types: `single` | `double`

Output Arguments

p — Interpolated values at query points

vector | matrix | array

Interpolated values at query points, returned as a vector, matrix, or array. The size of `p` depends on the sizes of the inputs:

- If `y` is a vector, then `p` is a vector that has the same length as `xq`.
- If `y` has two or more dimensions denoted by `n`, then `p` has size `[size(y,1) size(y,2) ... size(y,n-1) length(xq)]`. For example, if `y` is a matrix, then `p` is of size `[size(y,1) length(xq)]`.

pp — Piecewise polynomial

structure

Piecewise polynomial, returned as a structure. Use this structure with the `ppval` function to evaluate the interpolating polynomials at one or more query points. The structure has these fields.

Field	Description
`form`	`'pp'` for *piecewise polynomial*
`breaks`	Vector of length `L+1` with strictly increasing elements that represent the start and end of each of `L` intervals
`coefs`	`L`-by-`k` matrix with each row `coefs(i,:)` containing the local coefficients of an order `k` polynomial on the `i`th interval, `[breaks(i),breaks(i+1)]`
`pieces`	Number of pieces, `L`
`order`	Order of the polynomials
`dim`	Dimensionality of target

Since the polynomial coefficients in `coefs` are local coefficients for each interval, you must subtract the lower endpoint of the corresponding knot interval to use the coefficients in a conventional polynomial equation. In other words, for the coefficients `[a,b,c,d]` on the interval `[x1,x2]`, the corresponding polynomial is

$$f(x) = a(x - x_1)^3 + b(x - x_1)^2 + c(x - x_1) + d.$$

Definitions

Shape-Preserving Piecewise Cubic Interpolation

`pchip` interpolates using a piecewise cubic polynomial $P(x)$ with these properties:

- On each subinterval $x_k \le x \le x_{k+1}$, the polynomial $P(x)$ is a cubic Hermite interpolating polynomial for the given data points with specified derivatives (slopes) at the interpolation points.

- $P(x)$ interpolates y, that is, $P(x_j) = y_j$, and the first derivative $\frac{dP}{dx}$ is continuous.

  The second derivative $\frac{d^2P}{dx^2}$ is probably not continuous so jumps at the x_j are possible.
- The cubic interpolant $P(x)$ is shape preserving. The slopes at the x_j are chosen in such a way that $P(x)$ preserves the shape of the data and respects monotonicity. Therefore, on intervals where the data is monotonic, so is $P(x)$, and at points where the data has a local extremum, so does $P(x)$.

Note If y is a matrix, $P(x)$ satisfies these properties for each row of y.

Tips

- `spline` constructs $S(x)$ in almost the same way `pchip` constructs $P(x)$. However, `spline` chooses the slopes at the x_j differently, namely to make even $S''(x)$ continuous. This difference has several effects:
  - `spline` produces a smoother result, such that $S''(x)$ is continuous.
  - `spline` produces a more accurate result if the data consists of values of a smooth function.
  - `pchip` has no overshoots and less oscillation if the data is not smooth.
  - `pchip` is less expensive to set up.
  - The two are equally expensive to evaluate.

References

[1] Fritsch, F. N. and R. E. Carlson. "Monotone Piecewise Cubic Interpolation." *SIAM Journal on Numerical Analysis*. Vol. 17, 1980, pp.238–246.

[2] Kahaner, David, Cleve Moler, Stephen Nash. *Numerical Methods and Software*. Upper Saddle River, NJ: Prentice Hall, 1988.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input `x` must be strictly increasing.
- Code generation does not remove `y` entries with `NaN` values.
- If you generate code for the `pp = pchip(x,y)` syntax, then you cannot input `pp` to the `ppval` function in MATLAB. To create a MATLAB `pp` structure from a `pp` structure created by the code generator:
  - In code generation, use `unmkpp` to return the piecewise polynomial details to MATLAB.
  - In MATLAB, use `mkpp` to create the `pp` structure.

See Also

See Also

`interp1` | `ppval` | `spline`

Introduced before R2006a

pcode

Create protected function file

Syntax

```
pcode(fun)
pcode(fun1,...,funN)
pcode(fun,'-inplace')
```

Description

`pcode(fun)` obfuscates the code in `fun.m` and produces a file called `fun.p`, known as a P-file. If `fun` is a folder, then all the script or function files in that folder are obfuscated in P-files. MATLAB creates the P-files in the current folder. The original `.m` file or folder can be anywhere on the search path.

`pcode(fun1,...,funN)` creates `N` P-files from the listed files. If any inputs are folders, then MATLAB creates a P-file for every `.m` file the folders contain.

`pcode(fun,'-inplace')` creates P-files in the same folder as the script or function files.

Note:

- The `pcode` function *obfuscates* your code files, it does not *encrypt* them. While the content in a `.p` file is difficult to understand, it should not be considered secure. It is not recommended that you P-code files to protect your intellectual property.

- The `pcode` function does not support live scripts (`.mlx`).

Input Arguments

fun

MATLAB file or directory containing MATLAB files. If `fun` resides within a package and/or class folder, then `pcode` creates the same package and/or class structure to house the resulting P-files.

An input argument with no file extension and that is not a folder must be a function in the MATLAB path or in the current folder.

When using wild cards `*`, `pcode` ignores all files with extensions other than `.m`.

Default:

Examples

P-Coding Multiple Files

Convert selected files from the `sparfun` folder into P-files.

Create a temporary folder and define an existing path to `.m` files.

```
tmp = tempname;
mkdir(tmp)
cd(tmp)
fun = fullfile(matlabroot,'toolbox','matlab','sparfun','spr*.m');
```

Create the P-files.

```
pcode(fun)
dir(tmp)
```

```
.           ..          sprand.p     sprandn.p    sprandsym.p  sprank.p
```

The temporary folder now contains encoded P-files.

P-Coding Files That Belong to a Package and/or Class

Generate P-files from input files that are part of a package and/or class. This example uses an existing MATLAB example class.

Define `funclass` as an existing a class folder that contains `.m` files.

```
funclass = fullfile(docroot, 'techdoc', 'matlab_oop', ...
    'examples', '@BankAccount')
dir(funclass)
```

```
funclass =

C:\Program Files\MATLAB\R2013a\help\techdoc\matlab_oop\examples\@BankAccount

.            ..           BankAccount.m
```

Create a temporary folder. This folder has no package or class structure at this time.

```
tmp = tempname;
mkdir(tmp);
cd(tmp);
dir(tmp)
```

```
.            ..
```

Create a P-file for every `.m` file in the path `funclass`. Because the input files are part of a package and/or class, MATLAB creates a folder structure so that the output file belongs to the same package and/or class.

```
pcode(funclass)
dir(tmp)
```

```
.            ..           @BankAccount
```

You see that the P-file resides in the same folder structure.

```
dir('@BankAccount')
```

```
.            ..           BankAccount.p
```

P-Coding In Place

Generate P-files in the same folder as the input files using the option `inplace`

Copy several MATLAB files to a temporary folder.

```
fun = fullfile(matlabroot,'toolbox','matlab','sparfun','spr*.m');
tmp = tempname;
mkdir(tmp);
copyfile(fun,tmp)
dir(tmp)
```

```
.          ..          sprand.m     sprandn.m    sprandsym.m  sprank.m
```

Create P-files in the same folder as the original `.m` files.

```
pcode(tmp,'-inplace')
dir(tmp)
```

```
.            sprand.m     sprandn.m    sprandsym.m  sprank.m
..           sprand.p     sprandn.p    sprandsym.p  sprank.p
```

Tips

- The `pcode` algorithm was redesigned in MATLAB 7.5 (Release R2007b). If your P-file was generated prior to MATLAB 7.5, it will not run in MATLAB 8.6 (Release R2015b) or later. Files generated in 7.5, or later versions, cannot run in MATLAB 7.4 or earlier.
- When obfuscating all files in a folder, `pcode` does not obfuscate any files within subfolders.
- A P-file takes precedence over the corresponding MATLAB code file (`.m`) for execution, even after modifications to the code file.
- MATLAB does not display any of the help comments that might be in the original MATLAB code file (`.m`).

See Also

See Also

`matlab.codetools.requiredFilesAndProducts`

Topics

"Protect Your Source Code"

Introduced before R2006a

pcolor

Pseudocolor (checkerboard) plot

Syntax

```
pcolor(C)
pcolor(X,Y,C)
pcolor(axes_handles,...)
h = pcolor(...)
```

Description

A pseudocolor plot is a rectangular array of cells with colors determined by `C`. MATLAB creates a pseudocolor plot using each set of four adjacent points in `C` to define a surface rectangle (i.e., cell).

The default `shading` is `faceted`, which colors each cell with a single color. The last row and column of `C` are not used in this case. With `shading interp`, each cell is colored by bilinear interpolation of the colors at its four vertices, using all elements of `C`.

The minimum and maximum elements of `C` are assigned the first and last colors in the colormap. Colors for the remaining elements in `C` are determined by a linear mapping from value to colormap element.

`pcolor(C)` draws a pseudocolor plot. The elements of `C` are linearly mapped to an index into the current colormap. The mapping from `C` to the current colormap is defined by `colormap` and `caxis`.

`pcolor(X,Y,C)` draws a pseudocolor plot of the elements of `C` at the locations specified by `X` and `Y`. The plot is a logically rectangular, two-dimensional grid with vertices at the points `[X(i,j), Y(i,j)]`. `X` and `Y` are vectors or matrices that specify the spacing of the grid lines. If `X` and `Y` are vectors, `X` corresponds to the columns of `C` and `Y` corresponds to the rows. If `X` and `Y` are matrices, they must be the same size as `C`.

`pcolor(axes_handles,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = pcolor(...)` returns a handle to a `surface` graphics object.

Examples

Pseudocolor Plot of Hadamard Matrix

A Hadamard matrix has elements that are `+1` and `-1`. A colormap with only two entries is appropriate when displaying a pseudocolor plot of this matrix.

```
pcolor(hadamard(20))
colormap(gray(2))
axis ij
axis square
```

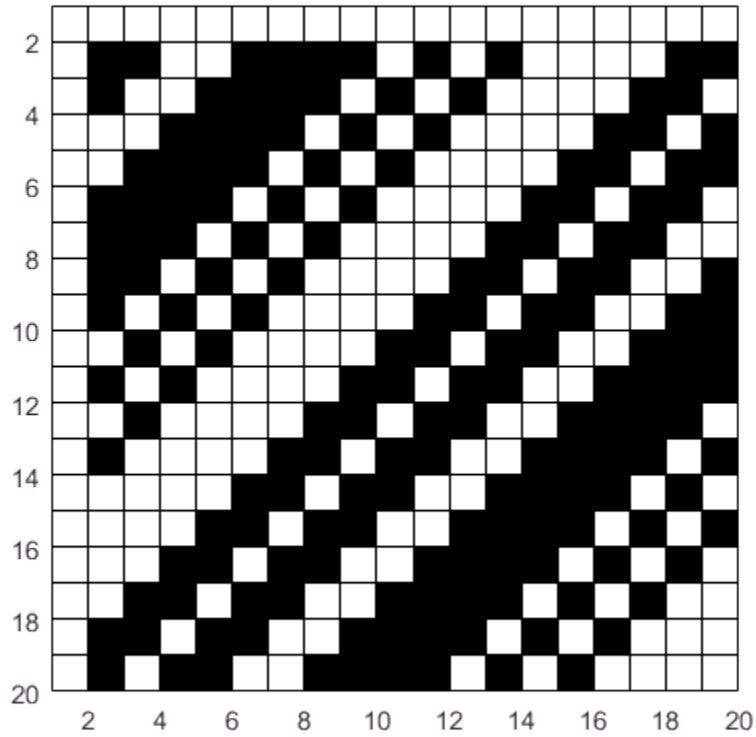

Polar Coordinate System

A simple color wheel illustrates a polar coordinate system.

```
n = 6;
r = (0:n)'/n;
theta = pi*(-n:n)/n;
X = r*cos(theta);
Y = r*sin(theta);
C = r*cos(2*theta);
pcolor(X,Y,C)
axis equal tight
```

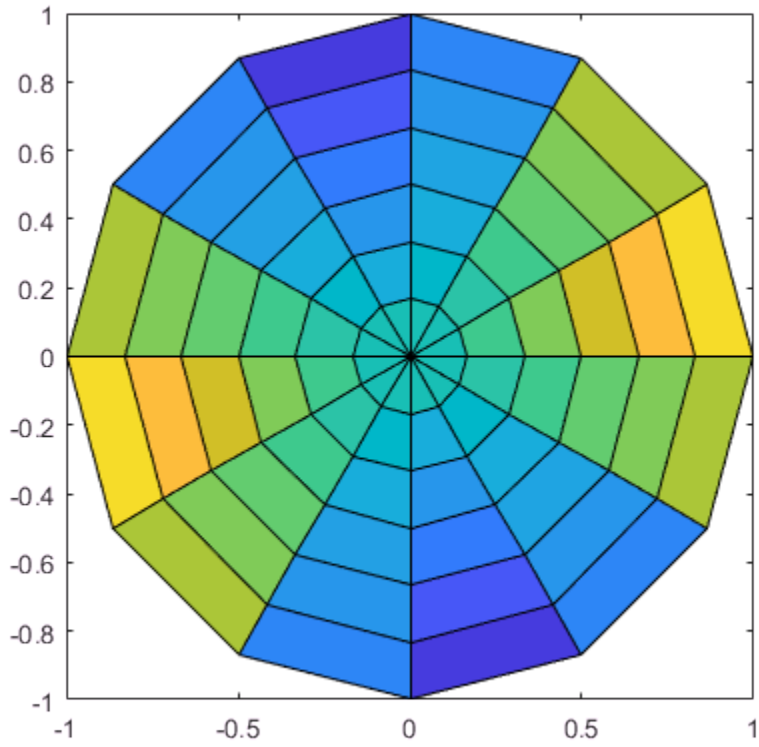

Tips

A pseudocolor plot is a flat surface plot viewed from above. `pcolor(X,Y,C)` is the same as viewing `surf(X,Y,zeros(size(X)),C)` using `view([0 90])`.

When you use `shading faceted` or `shading flat`, the constant color of each cell is the color associated with the corner having the smallest *x*-*y* coordinates. Therefore, `C(i,j)` determines the color of the cell in the *i*th row and *j*th column. The last row and column of `C` are not used.

When you use `shading interp`, each cell's color results from a bilinear interpolation of the colors at its four vertices, and all elements of `C` are used.

Algorithms

Use the `pcolor`, `image`, or `imagesc` function to display image data. Each function displays a rectangular array of cells and uses `C` to determine the colors.

- `pcolor(C)` uses the values in `C` to define the vertex colors by scaling the values to map to the full range of the colormap. The size of `C` determines the number of vertices. `pcolor` determines the cell colors using the colors defined at the cell vertices.
- `image(C)` uses `C` to define the cell colors by mapping the values directly into the colormap. The size of `C` determines the number of cells.
- `imagesc(C)` uses `C` to define the cell colors by scaling the values to map to the full range of the colormap. The size of `C` determines the number of cells.

`pcolor(X,Y,C)` can produce parametric grids, which is not possible with `image` or `imagesc`.

See Also

`caxis` | `image` | `mesh` | `shading` | `surf` | `view`

Introduced before R2006a

pdepe

Solve initial-boundary value problems for parabolic-elliptic PDEs in 1-D

Syntax

```
sol = pdepe(m,pdefun,icfun,bcfun,xmesh,tspan)
sol = pdepe(m,pdefun,icfun,bcfun,xmesh,tspan,options)
[sol,tsol,sole,te,ie] =
pdepe(m,pdefun,icfun,bcfun,xmesh,tspan,options)
```

Arguments

`m`	A parameter corresponding to the symmetry of the problem. `m` can be slab = `0`, cylindrical = `1`, or spherical = `2`.
`pdefun`	A handle to a function that defines the components of the PDE.
`icfun`	A handle to a function that defines the initial conditions.
`bcfun`	A handle to a function that defines the boundary conditions.
`xmesh`	A vector [`x0`, `x1`, ..., `xn`] specifying the points at which a numerical solution is requested for every value in `tspan`. The elements of `xmesh` must satisfy `x0 < x1 < ... < xn`. The length of `xmesh` must be >= `3`.
`tspan`	A vector [`t0`, `t1`, ..., `tf`] specifying the points at which a solution is requested for every value in `xmesh`. The elements of `tspan` must satisfy `t0 < t1 < ... < tf`. The length of `tspan` must be >= `3`.
`options`	Some options of the underlying ODE solver are available in `pdepe`: `RelTol`, `AbsTol`, `NormControl`, `InitialStep`, `MaxStep`, and `Events`. In most cases, default values for these options provide satisfactory solutions. See `odeset` for details.

Description

`sol = pdepe(m,pdefun,icfun,bcfun,xmesh,tspan)` solves initial-boundary value problems for systems of parabolic and elliptic PDEs in the one space variable

x and time t. `pdefun`, `icfun`, and `bcfun` are function handles. See "Create Function Handle" for more information. The ordinary differential equations (ODEs) resulting from discretization in space are integrated to obtain approximate solutions at times specified in `tspan`. The `pdepe` function returns values of the solution on a mesh provided in `xmesh`.

"Parameterizing Functions" explains how to provide additional parameters to the functions `pdefun`, `icfun`, or `bcfun`, if necessary.

`pdepe` solves PDEs of the form:

$$c\left(x,t,u,\frac{\partial u}{\partial x}\right)\frac{\partial u}{\partial t} = x^{-m}\frac{\partial}{\partial x}\left(x^m f\left(x,t,u,\frac{\partial u}{\partial x}\right)\right) + s\left(x,t,u,\frac{\partial u}{\partial x}\right)$$

The PDEs hold for $t_0 \le t \le t_f$ and $a \le x \le b$. The interval $[a,b]$ must be finite. m can be 0, 1, or 2, corresponding to slab, cylindrical, or spherical symmetry, respectively. If $m > 0$, then a must be ≥ 0.

In Equation 1-3, $f\,(x,t,u,\partial u/\partial x)$ is a flux term and $s\,(x,t,u,\partial u/\partial x)$ is a source term. The coupling of the partial derivatives with respect to time is restricted to multiplication by a diagonal matrix $c\,(x,t,u,\partial u/\partial x)$. The diagonal elements of this matrix are either identically zero or positive. An element that is identically zero corresponds to an elliptic equation and otherwise to a parabolic equation. There must be at least one parabolic equation. An element of c that corresponds to a parabolic equation can vanish at isolated values of x if those values of x are mesh points. Discontinuities in c and/or s due to material interfaces are permitted provided that a mesh point is placed at each interface.

For $t = t_0$ and all x, the solution components satisfy initial conditions of the form

$$u(x,t_0) = u_0(x)$$

For all t and either $x = a$ or $x = b$, the solution components satisfy a boundary condition of the form

$$p(x,t,u) + q(x,t)f\left(x,t,u,\frac{\partial u}{\partial x}\right) = 0$$

Elements of q are either identically zero or never zero. Note that the boundary conditions are expressed in terms of the flux f rather than $\partial u/\partial x$. Also, of the two coefficients, only p can depend on u.

In the call `sol = pdepe(m,pdefun,icfun,bcfun,xmesh,tspan)`:

- `m` corresponds to m.
- `xmesh(1)` and `xmesh(end)` correspond to a and b.
- `tspan(1)` and `tspan(end)` correspond to t_0 and t_f.
- `pdefun` computes the terms c, f, and s (Equation 1-3). It has the form

  ```
  [c,f,s] = pdefun(x,t,u,dudx)
  ```

  The input arguments are scalars `x` and `t` and vectors `u` and `dudx` that approximate the solution u and its partial derivative with respect to x, respectively. `c`, `f`, and `s` are column vectors. `c` stores the diagonal elements of the matrix c (Equation 1-3).
- `icfun` evaluates the initial conditions. It has the form

  ```
  u = icfun(x)
  ```

  When called with an argument `x`, `icfun` evaluates and returns the initial values of the solution components at `x` in the column vector `u`.
- `bcfun` evaluates the terms p and q of the boundary conditions (Equation 1-5). It has the form

  ```
  [pl,ql,pr,qr] = bcfun(xl,ul,xr,ur,t)
  ```

  `ul` is the approximate solution at the left boundary `xl` = a and `ur` is the approximate solution at the right boundary `xr` = b. `pl` and `ql` are column vectors corresponding to p and q evaluated at `xl`, similarly `pr` and `qr` correspond to `xr`. When $m > 0$ and $a = 0$, boundedness of the solution near $x = 0$ requires that the flux f vanish at $a = 0$. `pdepe` imposes this boundary condition automatically and it ignores values returned in `pl` and `ql`.

`pdepe` returns the solution as a multidimensional array `sol`. u_i = `ui` = `sol(:,:,i)` is an approximation to the `i`th component of the solution vector u. The element `ui(j,k)` = `sol(j,k,i)` approximates u_i at (t,x) = (`tspan(j)`,`xmesh(k)`).

`ui = sol(j,:,i)` approximates component `i` of the solution at time `tspan(j)` and mesh points `xmesh(:)`. Use `pdeval` to compute the approximation and its partial derivative $\partial u_i/\partial x$ at points not included in `xmesh`. See `pdeval` for details.

`sol = pdepe(m,pdefun,icfun,bcfun,xmesh,tspan,options)` solves as above with default integration parameters replaced by values in `options`, an argument created

with the `odeset` function. Only some of the options of the underlying ODE solver are available in `pdepe`: `RelTol`, `AbsTol`, `NormControl`, `InitialStep`, and `MaxStep`. The defaults obtained by leaving off the input argument `options` will generally be satisfactory. See `odeset` for details.

`[sol,tsol,sole,te,ie] = pdepe(m,pdefun,icfun,bcfun,xmesh,tspan,options)` with the `'Events'` property in `options` set to a function handle `Events`, solves as above while also finding where event functions `g(t,u(x,t))`are zero. For each function you specify whether the integration is to terminate at a zero and whether the direction of the zero crossing matters. Three column vectors are returned by `events`: `[value,isterminal,direction] = events(m,t,xmesh,umesh)`. `xmesh` contains the spatial mesh and `umesh` is the solution at the mesh points. Use `pdeval` to evaluate the solution between mesh points. For the I-th event function, `value(i)` is the value of the function, `ISTERMINAL(I) = 1` if the integration is to terminate at a zero of this event function and 0 otherwise. `direction(i) = 0` if all zeros are to be computed (the default), +1 if only zeros where the event function is increasing, and -1 if only zeros where the event function is decreasing. Output `tsol` is a column vector of times specified in `tspan`, prior to first terminal event. `SOL(j,:,:)` is the solution at `T(j)`. `TE` is a vector of times at which events occur. `SOLE(j,:,:)` is the solution at `TE(j)` and indices in vector `IE` specify which event occurred.

If `UI = SOL(j,:,i)` approximates component i of the solution at time `TSPAN(j)` and mesh points `XMESH`, `pdeval` evaluates the approximation and its partial derivative $\partial u_i/\partial x$ at the array of points `XOUT` and returns them in `UOUT` and `DUOUTDX: [UOUT,DUOUTDX] = PDEVAL(M,XMESH,UI,XOUT)`

Note: The partial derivative $\partial u_i/\partial x$ is evaluated here rather than the flux. The flux is continuous, but at a material interface the partial derivative may have a jump.

Examples

Example 1. This example illustrates the straightforward formulation, computation, and plotting of the solution of a single PDE.

$$\pi^2 \frac{\partial u}{\partial t} = \frac{\partial}{\partial x}\left(\frac{\partial u}{\partial x}\right)$$

This equation holds on an interval $0 \le x \le 1$ for times $t \ge 0$.

The PDE satisfies the initial condition

$$u(x,0) = \sin \pi x$$

and boundary conditions

$$u(0,t) \equiv 0$$
$$\pi e^{-t} + \frac{\partial u}{\partial x}(1,t) = 0$$

It is convenient to use local functions to place all the functions required by `pdepe` in a single function.

```
function pdex11

m = 0;
x = linspace(0,1,20);
t = linspace(0,2,5);

sol = pdepe(m,@pdex1pde,@pdex1ic,@pdex1bc,x,t);
% Extract the first solution component as u.
u = sol(:,:,1);

% A surface plot is often a good way to study a solution.
surf(x,t,u)
title('Numerical solution computed with 20 mesh points.')
xlabel('Distance x')
ylabel('Time t')

% A solution profile can also be illuminating.
figure
plot(x,u(end,:))
title('Solution at t = 2')
xlabel('Distance x')
ylabel('u(x,2)')
% --------------------------------------------------------------
function [c,f,s] = pdex1pde(x,t,u,DuDx)
c = pi^2;
f = DuDx;
s = 0;
```

```
% --------------------------------------------------------------
function u0 = pdex1ic(x)
u0 = sin(pi*x);
% --------------------------------------------------------------
function [pl,ql,pr,qr] = pdex1bc(xl,ul,xr,ur,t)
pl = ul;
ql = 0;
pr = pi * exp(-t);
qr = 1;
```

In this example, the PDE, initial condition, and boundary conditions are coded in local functions `pdex1pde`, `pdex1ic`, and `pdex1bc`.

The surface plot shows the behavior of the solution.

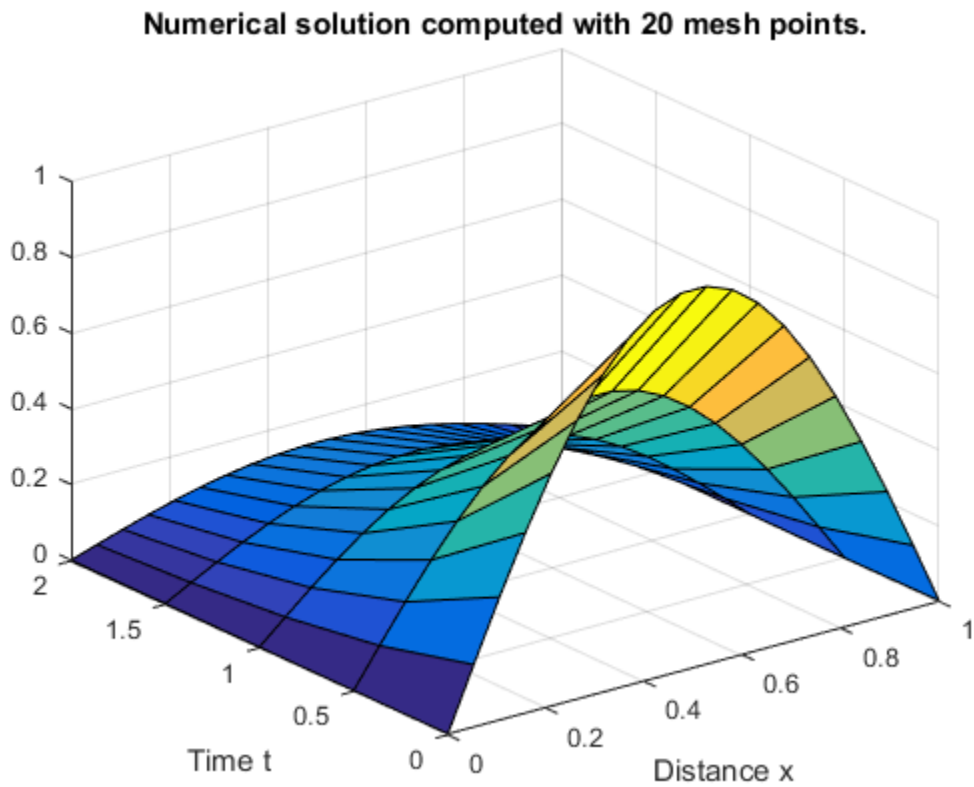

The following plot shows the solution profile at the final value of `t` (i.e., `t = 2`).

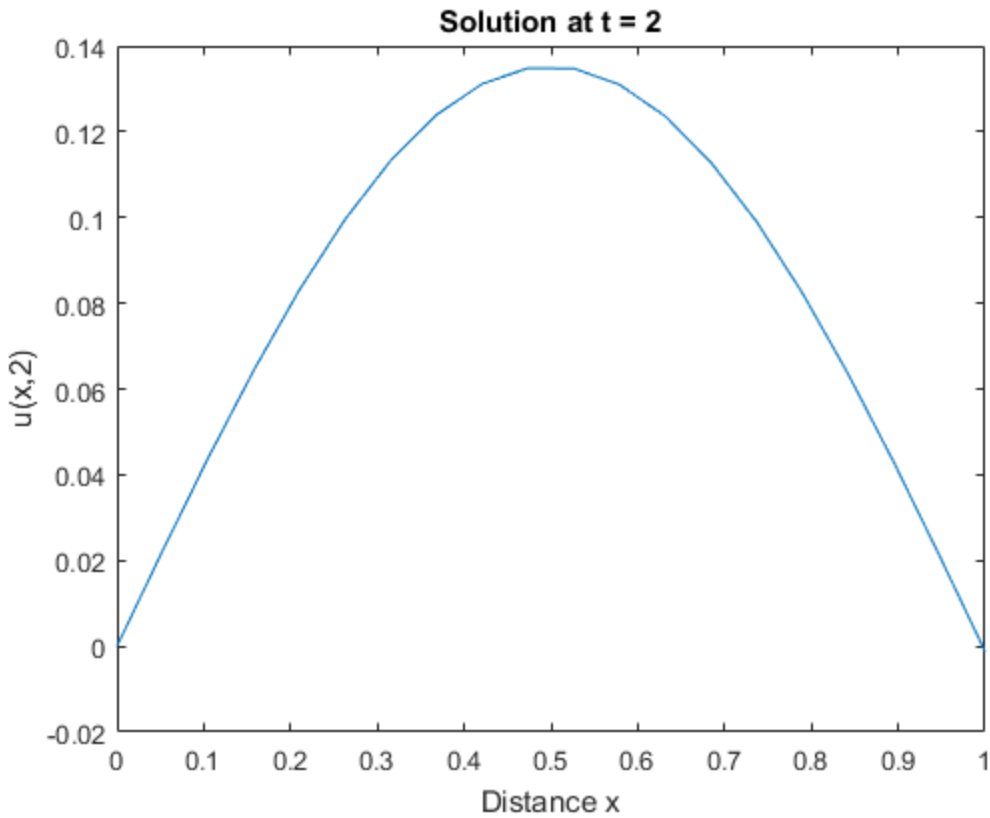

Example 2. This example illustrates the solution of a system of PDEs. The problem has boundary layers at both ends of the interval. The solution changes rapidly for small t.

The PDEs are

$$\frac{\partial u_1}{\partial t} = 0.024\frac{\partial^2 u_1}{\partial x^2} - F(u_1 - u_2)$$
$$\frac{\partial u_2}{\partial t} = 0.170\frac{\partial^2 u_2}{\partial x^2} + F(u_1 - u_2)$$

where $F(y) = \exp(5.73y) - \exp(-11.46y)$.

This equation holds on an interval $0 \le x \le 1$ for times $t \ge 0$.

The PDE satisfies the initial conditions

$$u_1(x,0) \equiv 1$$
$$u_2(x,0) \equiv 0$$

and boundary conditions

$$\frac{\partial u_1}{\partial x}(0,t) \equiv 0$$
$$u_2(0,t) \equiv 0$$
$$u_1(1,t) \equiv 1$$
$$\frac{\partial u_2}{\partial x}(1,t) \equiv 0$$

In the form expected by `pdepe`, the equations are

$$\begin{bmatrix}1\\1\end{bmatrix}.*\frac{\partial}{\partial t}\begin{bmatrix}u_1\\u_2\end{bmatrix} = \frac{\partial}{\partial x}\begin{bmatrix}0.024(\partial u_1/\partial x)\\0.170(\partial u_2/\partial x)\end{bmatrix} + \begin{bmatrix}-F(u_1-u_2)\\F(u_1-u_2)\end{bmatrix}$$

The boundary conditions on the partial derivatives of u have to be written in terms of the flux. In the form expected by `pdepe`, the left boundary condition is

$$\begin{bmatrix}0\\u_2\end{bmatrix} + \begin{bmatrix}1\\0\end{bmatrix}.*\begin{bmatrix}0.024(\partial u_1/\partial x)\\0.170(\partial u_2/\partial x)\end{bmatrix} = \begin{bmatrix}0\\0\end{bmatrix}$$

and the right boundary condition is

$$\begin{bmatrix}u_1-1\\0\end{bmatrix} + \begin{bmatrix}0\\1\end{bmatrix}.*\begin{bmatrix}0.024(\partial u_1/\partial x)\\0.170(\partial u_2/\partial x)\end{bmatrix} = \begin{bmatrix}0\\0\end{bmatrix}$$

The solution changes rapidly for small t. The program selects the step size in time to resolve this sharp change, but to see this behavior in the plots, the example must select the output times accordingly. There are boundary layers in the solution at both ends of [0,1], so the example places mesh points near `0` and `1` to resolve these sharp changes.

Often some experimentation is needed to select a mesh that reveals the behavior of the solution.

```
function pdex4
m = 0;
x = [0 0.005 0.01 0.05 0.1 0.2 0.5 0.7 0.9 0.95 0.99 0.995 1];
t = [0 0.005 0.01 0.05 0.1 0.5 1 1.5 2];

sol = pdepe(m,@pdex4pde,@pdex4ic,@pdex4bc,x,t);
u1 = sol(:,:,1);
u2 = sol(:,:,2);

figure
surf(x,t,u1)
title('u1(x,t)')
xlabel('Distance x')
ylabel('Time t')

figure
surf(x,t,u2)
title('u2(x,t)')
xlabel('Distance x')
ylabel('Time t')
% --------------------------------------------------------------
function [c,f,s] = pdex4pde(x,t,u,DuDx)
c = [1; 1];
f = [0.024; 0.17] .* DuDx;
y = u(1) - u(2);
F = exp(5.73*y)-exp(-11.47*y);
s = [-F; F];
% --------------------------------------------------------------
function u0 = pdex4ic(x);
u0 = [1; 0];
% --------------------------------------------------------------
function [pl,ql,pr,qr] = pdex4bc(xl,ul,xr,ur,t)
pl = [0; ul(2)];
ql = [1; 0];
pr = [ur(1)-1; 0];
qr = [0; 1];
```

In this example, the PDEs, initial conditions, and boundary conditions are coded in local functions `pdex4pde`, `pdex4ic`, and `pdex4bc`.

The surface plots show the behavior of the solution components.

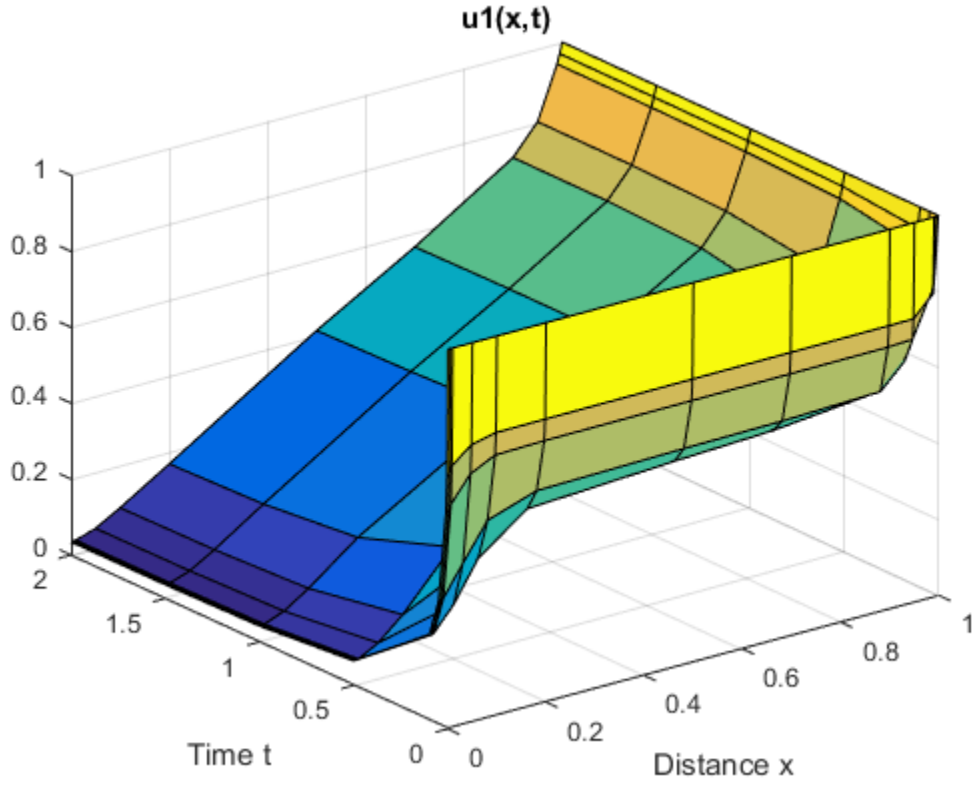
u1(x,t)
1
0.8
0.6
0.4
0.2
0
2
1.5
1
0.5
0
Time t
0
0.2
0.4
0.6
0.8
1
Distance x

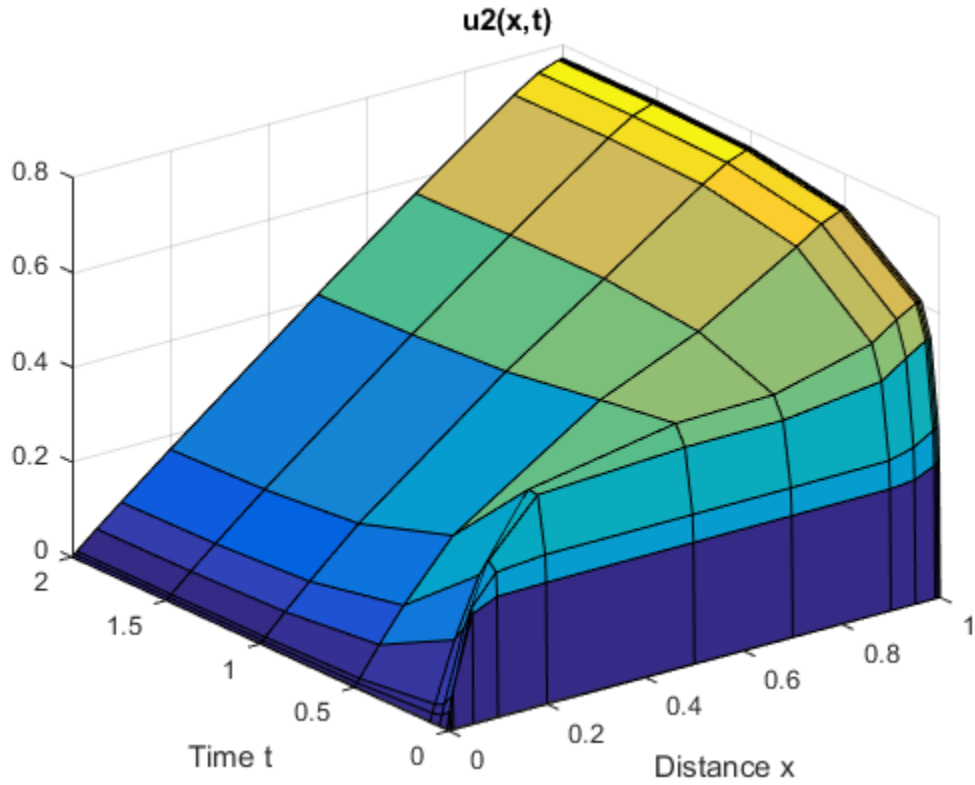

Tips

- The arrays `xmesh` and `tspan` play different roles in `pdepe`.

  `tspan` – The `pdepe` function performs the time integration with an ODE solver that selects both the time step and formula dynamically. The elements of `tspan` merely specify where you want answers and the cost depends weakly on the length of `tspan`.

  `xmesh` – Second order approximations to the solution are made on the mesh specified in `xmesh`. Generally, it is best to use closely spaced mesh points where the solution changes rapidly. `pdepe` does *not* select the mesh in *x* automatically. You must provide

an appropriate fixed mesh in `xmesh`. The cost depends strongly on the length of `xmesh`. When $m > 0$, it is not necessary to use a fine mesh near $x = 0$ to account for the coordinate singularity.

- The time integration is done with `ode15s`. `pdepe` exploits the capabilities of `ode15s` for solving the differential-algebraic equations that arise when Equation 1-3 contains elliptic equations, and for handling Jacobians with a specified sparsity pattern.
- After discretization, elliptic equations give rise to algebraic equations. If the elements of the initial conditions vector that correspond to elliptic equations are not "consistent" with the discretization, `pdepe` tries to adjust them before beginning the time integration. For this reason, the solution returned for the initial time may have a discretization error comparable to that at any other time. If the mesh is sufficiently fine, `pdepe` can find consistent initial conditions close to the given ones. If `pdepe` displays a message that it has difficulty finding consistent initial conditions, try refining the mesh.

  No adjustment is necessary for elements of the initial conditions vector that correspond to parabolic equations.

References

[1] Skeel, R. D. and M. Berzins, "A Method for the Spatial Discretization of Parabolic Equations in One Space Variable," *SIAM Journal on Scientific and Statistical Computing*, Vol. 11, 1990, pp.1–32.

See Also

See Also

`ode15s` | `odeget` | `odeset` | `pdeval`

Topics

“Create Function Handle”

Introduced before R2006a

pdeval

Evaluate numerical solution of PDE using output of pdepe

Syntax

```
[uout,duoutdx] = pdeval(m,x,ui,xout)
```

Arguments

`m`	Symmetry of the problem: slab = `0`, cylindrical = `1`, spherical = `2`. This is the first input argument used in the call to `pdepe`.
`x`	A vector [`x0`, `x1`, ..., `xn`] specifying the points at which the elements of `ui` were computed. This is the same vector with which `pdepe` was called.
`ui`	A vector `sol(j,:,i)` that approximates component `i` of the solution at time t_f and mesh points `xmesh`, where `sol` is the solution returned by `pdepe`.
`xout`	A vector of points from the interval [`x0`,`xn`] at which the interpolated solution is requested.

Description

`[uout,duoutdx] = pdeval(m,x,ui,xout)` approximates the solution u_i and its partial derivative $\partial u_i/\partial x$ at points from the interval [`x0`,`xn`]. The `pdeval` function returns the computed values in `uout` and `duoutdx`, respectively.

Note `pdeval` evaluates the partial derivative $\partial u_i/\partial x$ rather than the flux f. Although the flux is continuous, the partial derivative may have a jump at a material interface.

See Also

`pdepe`

Introduced before R2006a

peaks

Example function of two variables

Syntax

```
Z = peaks;
Z = peaks(n);
Z = peaks(V);
Z = peaks(X,Y);
peaks(...)
[X,Y,Z] = peaks(...);
```

Description

`peaks` is a function of two variables, obtained by translating and scaling Gaussian distributions, which is useful for demonstrating `mesh`, `surf`, `pcolor`, `contour`, and so on.

`Z = peaks;` returns a 49-by-49 matrix.

`Z = peaks(n);` returns an `n`-by-`n` matrix.

`Z = peaks(V);` returns an `n`-by-`n` matrix, where `n = length(V)`.

`Z = peaks(X,Y);` evaluates `peaks` at the given `X` and `Y` (which must be the same size) and returns a matrix the same size.

`peaks(...)` (with no output argument) plots the peaks function with `surf`. Use any of the input argument combinations in the previous syntaxes.

`[X,Y,Z] = peaks(...);` returns two additional matrices, `X` and `Y`, for parametric plots, for example, `surf(X,Y,Z,del2(Z))`. If not given as input, the underlying matrices `X` and `Y` are

```
[X,Y] = meshgrid(V,V)
```

where `V` is a given vector, or `V` is a vector of length `n` with elements equally spaced from -3 to 3. If no input argument is given, the default `n` is 49.

Examples

Peaks Surface

Create a 5-by-5 matrix of peaks and display the surface.

```
figure
peaks(5);
```

```
z =  3*(1-x).^2.*exp(-(x.^2) - (y+1).^2) ...
   - 10*(x/5 - x.^3 - y.^5).*exp(-x.^2-y.^2) ...
   - 1/3*exp(-(x+1).^2 - y.^2)
```

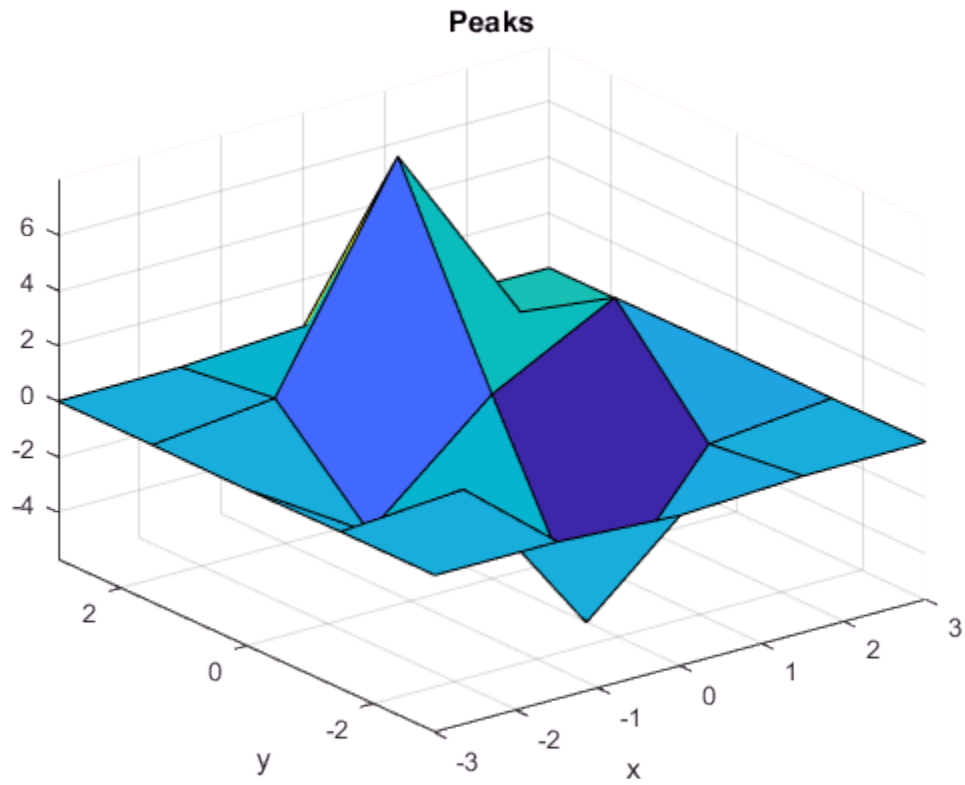

See Also

`meshgrid` | `surf`

Introduced before R2006a

matlab.perftest.FixedTimeExperiment class

Package: matlab.perftest
Superclasses: matlab.perftest.TimeExperiment

`TimeExperiment` that collects fixed number of measurements

Description

A `FixedTimeExperiment` is an instance of the `TimeExperiment` class that collects a fixed number of measurements.

To create a `FixedTimeExperiment` instance, use the matlab.perftest.TimeExperiment.withFixedSampleSize static method.

Properties

`NumWarmups` — Number of warm-up measurements

0 (default) | positive integer

Number of warm-up measurements, specified as a positive integer. `NumWarmups` defines the number of times that the test framework runs the test code to warm it up.

`SampleSize` — Number of sample measurements to collect after warm-up

positive integer

Number of sample measurements to collect after warm-up, specified as a positive integer.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.perftest.TimeExperiment | matlab.unittest.measurement.MeasurementResult

Introduced in R2016a

matlab.perftest.FrequentistTimeExperiment class

Package: matlab.perftest
Superclasses: matlab.perftest.TimeExperiment

`TimeExperiment` that collects variable number of measurements

Description

A `FrequentistTimeExperiment` is an instance of the `TimeExperiment` class that collects a variable number of measurements. The test framework collects a variable number of measurements to reach a specified relative margin of error at a specified confidence level.

To create a `FrequentistTimeExperiment` instance, use the matlab.perftest.TimeExperiment.limitingSamplingError static method.

Properties

`NumWarmups` — Number of warm-up measurements

4 (default) | positive integer

Number of warm-up measurements, specified as a positive integer. `NumWarmups` defines the number of times that the test framework runs the test code to warm it up.

`MinSamples` — Minimum number of samples

4 (default) | integer greater than 1

Minimum number of sample measurements, specified as an integer greater than 1. `MinSamples` defines the minimum number of times that the test framework runs the test code after `NumWarmups`. The test framework exercises the test code at least `MinSamples` times, regardless of whether the experiment meets the statistical objectives.

`MaxSamples` — Maximum number of samples

32 (default) | integer greater than or equal to `MinSamples`

Maximum number of sample measurements, specified as an integer greater than or equal to `MinSamples`. `MaxSamples` defines the maximum number of times that the

test framework runs the test code after `NumWarmups`. The test framework will stop after is takes `MaxSamples` samples, even if the experiment does not meet the statistical objectives.

`RelativeMarginOfError` — Goal relative margin of error for samples
0.05 (default) | positive number

Goal relative margin of error for samples, specified as a positive number.

The framework calculates the Relative Margin of Error for a sample `X` using the equation

$$\text{relMoE} = \frac{\text{T} * \text{std(X)}}{\text{mean(X)} * \sqrt{\text{length(X)}}}$$

where `T` is the T-score from Student's T distribution using the specified `ConfidenceLevel` and `length(X)-1` degrees of freedom.

`ConfidenceLevel` — Confidence level for samples to be within relative margin of error
0.95 (default) | number between 0 and 1

Confidence level for the samples to be within the relative margin of error, specified as a number between 0 and 1.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.perftest.TimeExperiment | matlab.unittest.measurement.MeasurementResult

Introduced in R2016a

matlab.perftest.TestCase class

Package: matlab.perftest
Superclasses: matlab.unittest.TestCase

Superclass of `matlab.perftest` performance test classes

Description

Use the `matlab.perftest.TestCase` class to write class-based performance tests that can define measurement boundaries. By default, the framework measures performance around the test method boundary. However, test classes that inherit from `matlab.perftest.TestCase` can use the `startMeasuring` and `stopMeasuring` methods to define boundaries to measure specific code segments.

The `matlab.perftest.TestCase` derives from the `matlab.unittest.TestCase` class.

Construction

The testing framework constructs the `matlab.perftest.TestCase` instances.

Methods

startMeasuring	Designate start of measurement boundary
stopMeasuring	Designate end of measurement boundary

Inherited Methods

addTeardown	Dynamically add teardown routine
applyFixture	Use fixture with `TestCase`
forInteractiveUse	Create TestCase for interactive use
getSharedTestFixtures	Provide access to shared test fixtures
log	Record diagnostic information
run	Run `TestCase` test

Also, the `TestCase` class inherits methods from these classes:

matlab.unittest.qualifications.Assertable	Qualification to validate preconditions of a test
matlab.unittest.qualifications.Assumable	Qualification to filter test content
matlab.unittest.qualifications.FatalAssertable	Qualification to abort test execution
matlab.unittest.qualifications.Verifiable	Qualification to produce soft failure conditions

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create Performance Test Class

Create a performance test class, `preallocationTest`. The performance testing framework measures the time for each of the four test methods.

```
classdef preallocationTest < matlab.perftest.TestCase
    methods(Test)
        function testOnes(testCase)
            x = ones(1,1e7);
        end

        function testIndexingWithVariable(testCase)
            id = 1:1e7;
            x(id) = 1;
        end

        function testIndexingOnLHS(testCase)
            x(1:1e7) = 1;
        end
```

```
        function testForLoop(testCase)
            for i=1:1e7
                x(i) = 1;
            end
        end

    end
end
```

Specify Boundaries for Performance Test Class

Create a performance test class, `fprintfTest`. The performance testing framework measures the code between the calls to the `startMeasuring` and `stopMeasuring` methods. This boundary restricts the performance testing framework to measuring only the call to the `fprintf` function. It excludes setup and teardown actions, and qualifications testing.

```
classdef fprintfTest < matlab.perftest.TestCase
    methods(Test)
        function testPrintingToFile(testCase)
            file = tempname;
            fid = fopen(file, 'w');
            testCase.assertNotEqual(fid, -1, 'IO Problem');

            stringToWrite = repmat('abcdef', 1, 1000000);

            testCase.startMeasuring();
            fprintf(fid, '%s', stringToWrite);
            testCase.stopMeasuring();

            testCase.verifyEqual(fileread(file), stringToWrite);
            fclose(fid);
        end
    end
end
```

See Also

See Also

matlab.perftest.TimeExperiment

Introduced in R2016a

startMeasuring

Class: matlab.perftest.TestCase
Package: matlab.perftest

Designate start of measurement boundary

Syntax

```
startMeasuring(testcase)
```

Description

`startMeasuring(testcase)` designates the start of a measurement boundary. Invoke this method and the `stopMeasuring` method to restrict measurements to the code between the `startMeasuring` and `stopMeasuring` method calls. Defining this boundary allows you to exclude setup, verification, and teardown code from the measurement.

The performance framework permits one call at most to the `startMeasuring` and `stopMeasuring` methods within each method that is tagged with the `Test` attribute. When creating bounded performance tests, keep the following in mind:

- A test method that calls the `startMeasuring` method must call the `stopMeasuring` method.
- A call to the `stopMeasuring` method must have a preceding call to `startMeasuring` method in the scope of the same test method.
- The performance framework does not permit multiple calls to `startMeasuring` and `stopMeasuring` within a particular test method.

If the framework encounters unsupported use of `startMeasuring` and `stopMeasuring` within a test method, it marks the corresponding `MeasurementResult` instance invalid.

Input Arguments

`testcase` — Instance of test case
`matlab.perftest.TestCase` object

Instance of the test case, specified as a `matlab.perftest.TestCase` object.

Examples

Specify Boundaries for Performance Test Class

Create a performance test class, `fprintfTest`. The performance testing framework measures the code between the calls to the `startMeasuring` and `stopMeasuring` methods. This boundary restricts the performance testing framework to measuring only the call to the `fprintf` function. It excludes setup and teardown actions, and qualifications testing.

```
classdef fprintfTest < matlab.perftest.TestCase
    methods(Test)
        function testPrintingToFile(testCase)
            file = tempname;
            fid = fopen(file, 'w');
            testCase.assertNotEqual(fid, -1, 'IO Problem');

            stringToWrite = repmat('abcdef', 1, 1000000);

            testCase.startMeasuring();
            fprintf(fid, '%s', stringToWrite);
            testCase.stopMeasuring();

            testCase.verifyEqual(fileread(file), stringToWrite);
            fclose(fid);
        end
    end
end
```

See Also

See Also

matlab.perftest.TimeExperiment | stopMeasuring

Introduced in R2016a

stopMeasuring

Class: matlab.perftest.TestCase
Package: matlab.perftest

Designate end of measurement boundary

Syntax

```
stopMeasuring(testcase)
```

Description

`stopMeasuring(testcase)` designates the end of a measurement boundary. Invoke this method and the `startMeasuring` method to restrict measurements to the code between the `startMeasuring` and `stopMeasuring` method calls. Defining this boundary allows you to exclude setup, verification, and teardown code from the measurement.

The performance framework permits one call at most to the `startMeasuring` and `stopMeasuring` methods within each method that is tagged with the `Test` attribute. When creating bounded performance tests, keep the following in mind:

- A test method that calls the `startMeasuring` method must call the `stopMeasuring` method.
- A call to the `stopMeasuring` method must have a preceding call to `startMeasuring` method in the scope of the same test method.
- The performance framework does not permit multiple calls to `startMeasuring` and `stopMeasuring` within a particular test method.

If the framework encounters unsupported use of `startMeasuring` and `stopMeasuring` within a test method, it marks the corresponding `MeasurementResult` instance invalid.

Input Arguments

`testcase` — Instance of test case
`matlab.perftest.TestCase` object

Instance of the test case, specified as a `matlab.perftest.TestCase` object.

Examples

Specify Boundaries for Performance Test Class

Create a performance test class, `fprintfTest`. The performance testing framework measures the code between the calls to the `startMeasuring` and `stopMeasuring` methods. This boundary restricts the performance testing framework to measuring only the call to the `fprintf` function. It excludes setup and teardown actions, and qualifications testing.

```
classdef fprintfTest < matlab.perftest.TestCase
    methods(Test)
        function testPrintingToFile(testCase)
            file = tempname;
            fid = fopen(file, 'w');
            testCase.assertNotEqual(fid, -1, 'IO Problem');

            stringToWrite = repmat('abcdef', 1, 1000000);

            testCase.startMeasuring();
            fprintf(fid, '%s', stringToWrite);
            testCase.stopMeasuring();

            testCase.verifyEqual(fileread(file), stringToWrite);
            fclose(fid);
        end
    end
end
```

See Also

See Also

matlab.perftest.TimeExperiment | startMeasuring

Introduced in R2016a

matlab.perftest.TimeExperiment class

Package: matlab.perftest

Interface for measuring execution time of code under test

Description

The `matlab.perftest.TimeExperiment` class is the principal interface for measuring the execution time of code under test. The performance testing framework runs a test suite and returns a `matlab.unittest.measurement.MeasurementResult` object for each element of the suite. For each test suite element, the testing framework collects multiple measurements and reports them in the corresponding `MeasurementResult`.

Construction

Instantiate a `TimeExperiment` object using one of its static methods.

Methods

limitingSamplingError	Construct time experiment for specified margin of error and confidence level
run	Run time experiment on test suite
withFixedSampleSize	Construct time experiment with fixed number of measurements

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.perftest.FrequentistTimeExperiment | matlab.perftest.FixedTimeExperiment | matlab.unittest.measurement.MeasurementResult | matlab.unittest.TestRunner

Introduced in R2016a

matlab.perftest.TimeExperiment.limitingSamplingError

Class: matlab.perftest.TimeExperiment
Package: matlab.perftest

Construct time experiment for specified margin of error and confidence level

Syntax

```
experiment = matlab.perftest.TimeExperiment.limitingSamplingError
experiment = matlab.perftest.TimeExperiment.limitingSamplingError(
Name,Value)
```

Description

`experiment = matlab.perftest.TimeExperiment.limitingSamplingError` constructs a time experiment for each test suite element, with the specified statistical objectives (such as margin of error and confidence level). This method returns an instance of `FrequentistTimeExperiment`. This syntax uses the following defaults to determine the number of sample measurements.

- Number of warm-up measurements: 4
- Minimum number of samples: 4
- Maximum number of samples collected in the event other statistical objectives are not met: 32
- Objective relative margin of error for samples: 0.05 (5%)
- Confidence level for samples to be within relative margin of error: 0.95 (95%)

`experiment = matlab.perftest.TimeExperiment.limitingSamplingError(Name,Value)` constructs a time experiment with additional options specified by one or more `Name,Value` pair arguments. Use this syntax to override the defaults listed above.

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `experiment = matlab.perftest.TimeExperiment.limitingSamplingError('RelativeMarginOfError',0`
creates a time experiment that collects sample measurements until samples have a relative margin of error of 12%, or until it collects 100 measurements.

`'NumWarmups'` — Number of warm-up measurements
4 (default) | positive integer

Number of warm-up measurements, specified as a positive integer. The value defines the number of times that the test framework exercises the test code to warm it up.

`'MinSamples'` — Minimum number of samples
4 (default) | positive integer

Minimum number of sample measurements, specified as a positive integer. The value defines the minimum number of times that the test framework exercises the test code after any warm-up runs. The test framework exercises the test code at least `MinSamples` times, regardless of whether the experiment meets the statistical objectives.

`'MaxSamples'` — Maximum number of samples
32 (default) | positive integer

Maximum number of sample measurements, specified as a positive integer. The value defines the maximum number of times that the test framework exercises the test code after `NumWarmups`. If the experiment does not meet the statistical objectives, the testing framework collects up to `MaxSamples`.

`'RelativeMarginOfError'` — Objective relative margin of error for samples
0.05 (default) | positive number

Objective relative margin of error for samples, specified as a positive number.

The testing framework calculates the relative margin of error for a sample `X` using the equation

$$\text{relMoE} = \frac{\text{T} * \text{std(X)}}{\text{mean(X)} * \sqrt{\text{length(X)}}}$$

where `T` is the T-score from Student's T distribution using the specified `ConfidenceLevel` and `length(X)-1` degrees of freedom.

`'ConfidenceLevel'` — Confidence level for samples to be within relative margin of error
0.95 (default) | number between 0 and 1

Confidence level for the samples to be within the relative margin of error, specified as a number from 0 through 1.

Examples

Performance Test with Variable Number of Measurements

In your current working folder, create a class-based test, `preallocationTest.m`, that compares different methods of preallocation.

```
classdef preallocationTest < matlab.perftest.TestCase
    methods(Test)
        function testOnes(testCase)
            x = ones(1,1e7);
        end
        function testIndexingWithVariable(testCase)
            id = 1:1e7;
            x(id) = 1;
        end
        function testIndexingOnLHS(testCase)
            x(1:1e7) = 1;
        end
        function testForLoop(testCase)
            for i=1:1e7
                x(i) = 1;
            end
        end
```

```
    end
end
```

Create a test suite.

```
suite = testsuite('preallocationTest');
```

Construct a time experiment with a variable number of sample measurements, and run the tests.

```
import matlab.perftest.TimeExperiment
experiment = TimeExperiment.limitingSamplingError;
result = run(experiment,suite);
```

```
Running preallocationTest
..........
..........
..........
..........
..........
..........
.........
Done preallocationTest
__________
```

View the test activity for the first test. Your results might vary.

```
result(1).TestActivity
```

```
ans =

                Name                 Passed    Failed    Incomplete    MeasuredTime    Obj
    ____________________________    ______    ______    __________    ____________    ___

    preallocationTest/testOnes      true      false     false         0.049027        war
    preallocationTest/testOnes      true      false     false         0.043951        war
    preallocationTest/testOnes      true      false     false         0.053917        war
    preallocationTest/testOnes      true      false     false         0.031983        war
    preallocationTest/testOnes      true      false     false         0.025259        sar
    preallocationTest/testOnes      true      false     false         0.031734        sar
    preallocationTest/testOnes      true      false     false         0.025073        sar
    preallocationTest/testOnes      true      false     false         0.024593        sar
    preallocationTest/testOnes      true      false     false         0.024708        sar
    preallocationTest/testOnes      true      false     false         0.024768        sar
    preallocationTest/testOnes      true      false     false         0.024791        sar
```

```
    preallocationTest/testOnes    true      false     false         0.024675        sar
    preallocationTest/testOnes    true      false     false         0.024579        sar
    preallocationTest/testOnes    true      false     false         0.024599        sar
    preallocationTest/testOnes    true      false     false         0.024858        sar
```

For this test, the performance testing framework collected 4 warm-up measurements (the default), and 11 sample measurements. After 11 sample measurements, the performance testing framework satisfied the default statistical objectives.

Construct a time experiment that collects two warm-up measurements and runs the tests a variable number of times to reach a sample mean with a 10% relative margin of error within a 90% confidence level.

```
experiment = TimeExperiment.limitingSamplingError('NumWarmups',2,...
    'RelativeMarginOfError',0.10, 'ConfidenceLevel', 0.90);
result = run(experiment, suite);
```

```
Running preallocationTest
..........
..........
..........
...
Done preallocationTest
__________
```

View the test activity for the first test. Your results might vary.

```
result(1).TestActivity
```

```
ans =

                Name                Passed    Failed    Incomplete    MeasuredTime    Ob
    ____________________________    ______    ______    __________    ____________    __

    preallocationTest/testOnes    true      false     false          0.02477        war
    preallocationTest/testOnes    true      false     false         0.046385        war
    preallocationTest/testOnes    true      false     false         0.040836        sar
    preallocationTest/testOnes    true      false     false         0.025888        sar
    preallocationTest/testOnes    true      false     false          0.02498        sar
    preallocationTest/testOnes    true      false     false          0.02476        sar
    preallocationTest/testOnes    true      false     false         0.024958        sar
    preallocationTest/testOnes    true      false     false         0.029113        sar
    preallocationTest/testOnes    true      false     false         0.024762        sar
    preallocationTest/testOnes    true      false     false         0.025303        sar
    preallocationTest/testOnes    true      false     false         0.025702        sar
```

For this test, the performance testing framework collected two warm-up measurements and nine sample measurements. After nine sample measurements, the performance testing framework satisfied the specified statistical objectives.

See Also

See Also

matlab.perftest.TimeExperiment.withFixedSampleSize | matlab.perftest.FrequentistTimeExperiment

Topics

"Overview of Performance Testing Framework"

Introduced in R2016a

run

Class: matlab.perftest.TimeExperiment
Package: matlab.perftest

Run time experiment on test suite

Syntax

```
results = run(experiment,suite)
```

Description

`results = run(experiment,suite)` runs a time experiment on a test suite, and returns an array of `MeasurementResult` objects. Each element in `results` corresponds to an element in `suite`.

Input Arguments

`experiment` — Experiment to collect measurements on
`matlab.perftest.TimeExperiment` instance

Experiment to collect measurements on, specified as a `matlab.perftest.TimeExperiment` instance.

`suite` — Suite of tests
`matlab.unittest.Test` array

Suite of tests, specified as a `matlab.unittest.Test` array.

Examples

Run Time Experiment

In your current working folder, create a class-based test, preallocationTest.m, that compares different methods of preallocation.

```
classdef preallocationTest < matlab.perftest.TestCase
    methods(Test)
        function testOnes(testCase)
            x = ones(1,1e7);
        end

        function testIndexingWithVariable(testCase)
            id = 1:1e7;
            x(id) = 1;
        end

        function testIndexingOnLHS(testCase)
            x(1:1e7) = 1;
        end

        function testForLoop(testCase)
            for i=1:1e7
                x(i) = 1;
            end
        end

    end
end
```

Create a test suite.

```
suite = testsuite('preallocationTest');
```

Construct a time experiment with a fixed number of sample measurements, and run the tests.

```
import matlab.perftest.TimeExperiment
numSamples = 10;
experiment = TimeExperiment.withFixedSampleSize(numSamples);
result = run(experiment,suite)
```

```
Running preallocationTest
..........
..........
..........
..........
Done preallocationTest
__________
```

```
result =

  1×4 MeasurementResult array with properties:

    Name
    Valid
    Samples
    TestActivity

Totals:
   4 Valid, 0 Invalid.
```

Alternatives

If you do not need to create an experiment and test suite explicitly, you can use `runperf`.

See Also

See Also

`runperf`

Topics

"Overview of Performance Testing Framework"

Introduced in R2016a

matlab.perftest.TimeExperiment.withFixedSampleSize

Class: matlab.perftest.TimeExperiment
Package: matlab.perftest

Construct time experiment with fixed number of measurements

Syntax

```
experiment = matlab.perftest.TimeExperiment.withFixedSampleSize(
numSamples)
```

Description

`experiment = matlab.perftest.TimeExperiment.withFixedSampleSize(numSamples)` constructs a time experiment with a fixed number of measurements. This method returns an instance of `FixedTimeExperiment`.

`experiment = matlab.perftest.TimeExperiment.withFixedSampleSize(numSamples,'NumWarmups',numWarmups)` configures the time experiment to first warm up the code by exercising it `numWarmups` times.

Input Arguments

`numSamples` — Number of sample measurements to collect
positive integer

Number of sample measurements to collect, specified as a positive integer. If you specified a number of warm-ups, the testing framework first exercises the code `numWarmups` times before collecting `numSamples` measurements.

`numWarmups` — Number of warm-up measurements
0 (default) | positive integer

Number of warm-up measurements, specified as a positive integer. `numWarmups` defines the number of times that the test framework exercises the test code to warm it up.

Warming up the code gives a more realistic analysis of typical execution time, since it minimizes the effects of first-time run costs.

Example: `experiment = matlab.perftest.TimeExperiment.withFixedSampleSize(24,'NumWarmups',8)` constructs a `FixedTimeExperiment` that exercises the code 8 times to warm it up and then exercises the code 24 times to collect sample measurements.

Examples

Performance Test with Fixed Number of Measurements

In your current working folder, create a class-based test, `preallocationTest.m`, that compares different methods of preallocation.

```
classdef preallocationTest < matlab.perftest.TestCase
    methods(Test)
        function testOnes(testCase)
            x = ones(1,1e7);
        end
        function testIndexingWithVariable(testCase)
            id = 1:1e7;
            x(id) = 1;
        end
        function testIndexingOnLHS(testCase)
            x(1:1e7) = 1;
        end
        function testForLoop(testCase)
            for i=1:1e7
                x(i) = 1;
            end
        end

    end
end
```

Create a test suite.

```
suite = testsuite('preallocationTest');
```

Construct a time experiment with a fixed number of sample measurements, and run the tests.

```
import matlab.perftest.TimeExperiment
numSamples = 6;
experiment = TimeExperiment.withFixedSampleSize(numSamples);
result = run(experiment,suite);
```

```
Running preallocationTest
..........
..........
....
Done preallocationTest
__________
```

View the test activity for the fourth test.

```
result(4).TestActivity
```

```
ans =

                Name                 Passed    Failed    Incomplete    MeasuredTime
    ____________________________     ______    ______    __________    ____________

    preallocationTest/testForLoop    true      false     false         0.90553
    preallocationTest/testForLoop    true      false     false         0.86564
    preallocationTest/testForLoop    true      false     false         0.75888
    preallocationTest/testForLoop    true      false     false         0.74051
    preallocationTest/testForLoop    true      false     false          0.8735
    preallocationTest/testForLoop    true      false     false         0.83188
```

The performance testing framework collected six sample measurements for each test.

Construct a time experiment that also runs the code 3 times to warm it up. Run the tests.

```
numWarmups = 3;
experiment = TimeExperiment.withFixedSampleSize(numSamples,'NumWarmups',numWarmups);
result = run(experiment,suite);
```

```
Running preallocationTest
..........
..........
....
Done preallocationTest
__________
```

View the test activity for the fourth test.

```
result(4).TestActivity
```

```
ans =

                Name                  Passed    Failed    Incomplete    MeasuredTime
    ____________________________      ______    ______    __________    ____________

    preallocationTest/testForLoop     true      false     false         0.82972
    preallocationTest/testForLoop     true      false     false         0.85917
    preallocationTest/testForLoop     true      false     false         0.85857
    preallocationTest/testForLoop     true      false     false         0.85307
    preallocationTest/testForLoop     true      false     false         0.86655
    preallocationTest/testForLoop     true      false     false         0.81533
    preallocationTest/testForLoop     true      false     false         0.88266
    preallocationTest/testForLoop     true      false     false         0.94436
    preallocationTest/testForLoop     true      false     false          1.0375
```

For each test, the performance testing framework collected three warm-up measurements in addition to the six sample measurements.

See Also

See Also

matlab.perftest.TimeExperiment.limitingSamplingError | matlab.perftest.FixedTimeExperiment

Topics

"Overview of Performance Testing Framework"

Introduced in R2016a

perl

Call Perl script using appropriate operating system executable

Syntax

```
perl('perlfile')
perl('perlfile',arg1,arg2,...)
result = perl(...)
[result, status] = perl(...)
```

Description

`perl('perlfile')` calls the Perl script `perlfile`, using the appropriate operating system Perl executable. Perl is included with MATLAB on Microsoft Windows systems, so you can run MATLAB functions containing the `perl` function. On Linux and Macintosh systems, MATLAB calls the Perl interpreter available with the operating system.

`perl('perlfile',arg1,arg2,...)` calls the Perl script `perlfile`, using the appropriate operating system Perl executable, and passes the arguments `arg1`, `arg2`, and so on, to `perlfile`.

`result = perl(...)` returns the results of attempted Perl call to `result`.

`[result, status] = perl(...)` returns the results of attempted Perl call to `result` and its exit status to `status`.

It is sometimes beneficial to use Perl scripts instead of MATLAB code. For example:

- Perl script exists
- Perl script preprocesses data quickly, formatting it in a way more easily read by MATLAB
- Perl has features not supported by MATLAB

Examples

Given the Perl script, `hello.pl`:

```
$input = $ARGV[0];
print "Hello $input.";
```

At the MATLAB command line, type:

```
perl('hello.pl','World')
```

```
ans =
Hello World.
```

See Also

`dos` | `regexp` | `system` | `unix` | `!` (exclamation point)

Introduced before R2006a

perms

All possible permutations

Syntax

```
P = perms(v)
```

Description

`P = perms(v)` returns a matrix containing all permutations of the elements of vector `v` in reverse lexicographic order. Each row of `P` contains a different permutation of the n elements in `v`. Matrix `P` has the same data type as `v`, and it has $n!$ rows and n columns.

Examples

All Permutations of Double Integers

```
v = [2 4 6];
P = perms(v)
```

```
P =

     6     4     2
     6     2     4
     4     6     2
     4     2     6
     2     6     4
     2     4     6
```

All Permutations of Unsigned Integers

```
v = uint16([1023 4095 65535]);
P = perms(v)
```

```
P = 6×3 uint16 matrix
```

```
   65535    4095    1023
   65535    1023    4095
    4095   65535    1023
    4095    1023   65535
    1023   65535    4095
    1023    4095   65535
```

All Permutations of Complex Numbers

```
v = [1+1i 2+1i 3+1i];
P = perms(v)
```

```
P =
   3.0000 + 1.0000i   2.0000 + 1.0000i   1.0000 + 1.0000i
   3.0000 + 1.0000i   1.0000 + 1.0000i   2.0000 + 1.0000i
   2.0000 + 1.0000i   3.0000 + 1.0000i   1.0000 + 1.0000i
   2.0000 + 1.0000i   1.0000 + 1.0000i   3.0000 + 1.0000i
   1.0000 + 1.0000i   3.0000 + 1.0000i   2.0000 + 1.0000i
   1.0000 + 1.0000i   2.0000 + 1.0000i   3.0000 + 1.0000i
```

Input Arguments

v — Set of items

vector of numeric, `logical`, or `char` values

Set of items, specified as a vector of numeric, `logical`, or `char` values.

Example: `[1 2 3 4]`

Example: `[1+1i 2+1i 3+1i 4+1i]`

Example: `int16([1 2 3 4])`

Example: `['abcd']`

Example: `[true false true false]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

Limitations

`perms(v)` is practical when `length(v)` is less than about 10.

See Also

See Also

`nchoosek` | `permute` | `randperm`

Introduced before R2006a

permute

Rearrange dimensions of N-D array

Syntax

```
B = permute(A,order)
```

Description

`B = permute(A,order)` rearranges the dimensions of `A` so that they are in the order specified by the vector `order`. `B` has the same values of `A` but the order of the subscripts needed to access any particular element is rearranged as specified by `order`. All the elements of `order` must be unique, real, positive, integer values.

Examples

Permute Array Dimensions

Create a 3-by-4-by-5 array and permute it so that the first and third dimensions are switched.

```
A = rand(3,4,5);
B = permute(A,[3 2 1]);
size(B)
```

```
ans =

     5     4     3
```

Tips

`permute` and `ipermute` are a generalization of transpose (`.'`) for multidimensional arrays.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

Permuting the tall dimension (dimension one) is not supported.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays for the first argument.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

`ipermute` | `randperm` | `circshift` | `fliplr` | `flipud` | `reshape` | `shiftdim`

Introduced before R2006a

persistent

Define persistent variable

Syntax

```
persistent X Y Z
```

Description

`persistent X Y Z` defines `X`, `Y`, and `Z` as variables that are local to the function in which they are declared; yet their values are retained in memory between calls to the function. Persistent variables are similar to global variables because the MATLAB software creates permanent storage for both. They differ from global variables in that persistent variables are known only to the function in which they are declared. This prevents persistent variables from being changed by other functions or from the MATLAB command line.

Whenever you clear or modify a function that is in memory, MATLAB also clears all persistent variables declared by that function. To keep a function in memory until MATLAB quits, use `mlock`.

If the persistent variable does not exist the first time you issue the `persistent` statement, it is initialized to the empty matrix.

It is an error to declare a variable persistent if a variable with the same name exists in the current workspace. MATLAB also errors if you declare any of a function's input or output arguments as persistent within that same function. For example, the following persistent declaration is invalid:

```
function myfun(argA, argB, argC)
persistent argB
```

Examples

This function writes a large array to a spreadsheet file and then reads several rows from the same file. Because you only need to write the array to the spreadsheet one time, the

program tests whether an array can be read from the file and, if so, does not waste time in repeating that task. By defining the `dblArray` variable as persistent, you can easily check whether the array has been read from the spreadsheet file.

Here is the `arrayToXLS` function:

```
function arrayToXLS(A, xlsfile, x1, x2)
persistent dblArray;

if isempty(dblArray)
    disp 'Writing spreadsheet file ...'
    xlswrite(xlsfile, A);
end

disp 'Reading array from spreadsheet ...'
dblArray = xlsread(xlsfile, 'Sheet1', [x1 ':' x2])
fprintf('\n');
```

Run the function three times and observe the time elapsed for each run. The second and third run take approximately one tenth the time of the first run in which the function must create the spreadsheet:

```
largeArray = rand(4000, 200);

tic,  arrayToXLS(largeArray, 'myTest.xls','E254', 'J256'),  toc
Writing spreadsheet file ...
Reading array from spreadsheet ...
dblArray =
    0.0982    0.3783    0.1264    0.7880    0.1902    0.5811
    0.2251    0.2704    0.5682    0.7271    0.8028    0.2834
    0.6453    0.5568    0.8254    0.4961    0.9096    0.5402

Elapsed time is 8.990525 seconds.


tic,  arrayToXLS(largeArray, 'myTest.xls','E257', 'J258'),  toc
Reading array from spreadsheet ...
dblArray =
    0.4620    0.3781    0.6386    0.5930    0.0946    0.4865
    0.1605    0.1251    0.8709    0.5188    0.6702    0.2138

Elapsed time is 0.912534 seconds.
```

```
tic,  arrayToXLS(largeArray, 'myTest.xls','E259', 'J262'),  toc
Reading array from spreadsheet ...
dblArray =
    0.7015    0.6588    0.4023    0.0359    0.4512    0.6097
    0.1308    0.6441    0.0431    0.6396    0.7481    0.8688
    0.8278    0.2686    0.5475    0.8550    0.5896    0.1080
    0.9437    0.1671    0.0505    0.1203    0.2461    0.7306

Elapsed time is 0.928843 seconds.
```

Now clear the `arrayToXLS` function from memory and observe that running it takes much longer again:

```
clear functions

tic,  arrayToXLS(largeArray, 'myTest.xls','E263', 'J264'),  toc
Writing spreadsheet file ...
Reading array from spreadsheet ...
dblArray =
    0.6292    0.7788    0.0732    0.6481    0.9299    0.8631
    0.7700    0.5181    0.9805    0.5092    0.8658    0.4070

Elapsed time is 7.603461 seconds.
```

Tips

There is no function form of the `persistent` command (i.e., you cannot use parentheses and quote the variable names).

See Also

`global` | `clear` | `mislocked` | `mlock` | `munlock` | `isempty`

Introduced before R2006a

pi

Ratio of circle's circumference to its diameter

Syntax

```
pi
```

Description

`pi` returns the floating-point number nearest the value of π. The expressions `4*atan(1)` and `imag(log(-1))` provide the same value.

Examples

Sine of Pi

Compute the sine of pi. The result is not exactly zero in floating point arithmetic.

```
sin(pi)
```

```
ans = 1.2246e-16
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Introduced before R2006a

pie

Pie chart

Syntax

```
pie(X)
pie(X,explode)
pie(X,labels)
pie(X,explode,labels)
```

```
pie(ax, ___ )
```

```
p = pie( ___ )
```

Description

`pie(X)` draws a pie chart using the data in `X`. Each slice of the pie chart represents an element in `X`.

- If `sum(X) ≤ 1`, then the values in `X` directly specify the areas of the pie slices. `pie` draws only a partial pie if `sum(X) < 1`.
- If `sum(X) > 1`, then `pie` normalizes the values by `X/sum(X)` to determine the area of each slice of the pie.
- If `X` is of data type `categorical`, the slices correspond to categories. The area of each slice is the number of elements in the category divided by the number of elements in `X`.

`pie(X,explode)` offsets slices from the pie. `explode` is a vector or matrix of zeros and nonzeros that correspond to `X`. The `pie` function offsets slices for the nonzero elements only in `explode`.

If `X` is of data type `categorical`, then `explode` can be a vector of zeros and nonzeros corresponding to categories, or a cell array of the names of categories to offset.

`pie(X,labels)` specifies text labels for the slices. The number of labels must equal the number of slices. `X` must be numeric.

`pie(X,explode,labels)` specifies text labels for the slices. The number of labels must equal the number of slices.

`pie(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`p = pie( ___ )` returns a vector of patch and text graphics objects. The input can be any of the input argument combinations in the previous syntaxes.

Examples

Create Pie Chart with Offset Slices

Create a pie chart of vector `X`.

```
X = [1 3 0.5 2.5 2];
pie(X)
```

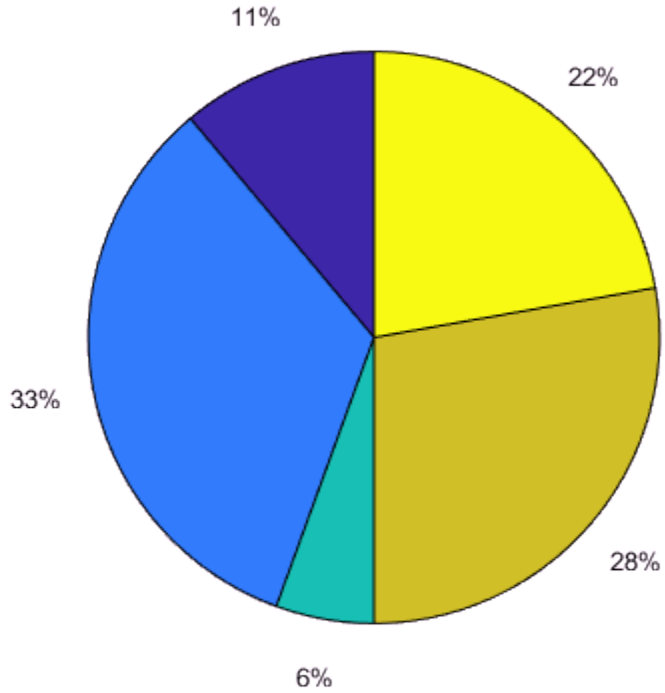

Offset the second and fourth pie slices by setting the corresponding `explode` elements to 1.

```
explode = [0 1 0 1 0];
pie(X,explode)
```

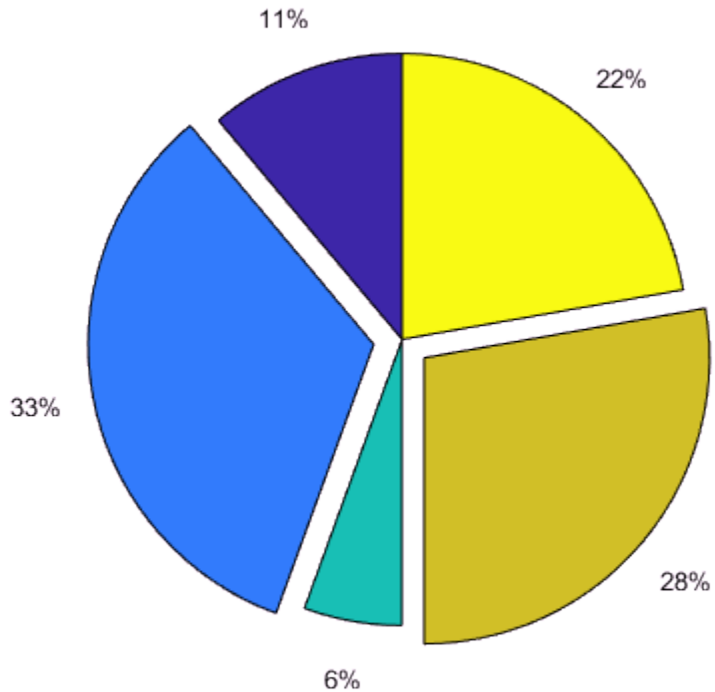

Specify Text Labels for Pie Chart

Create a pie chart of vector X and label the slices.

```
X = 1:3;
labels = {'Taxes','Expenses','Profit'};
pie(X,labels)
```

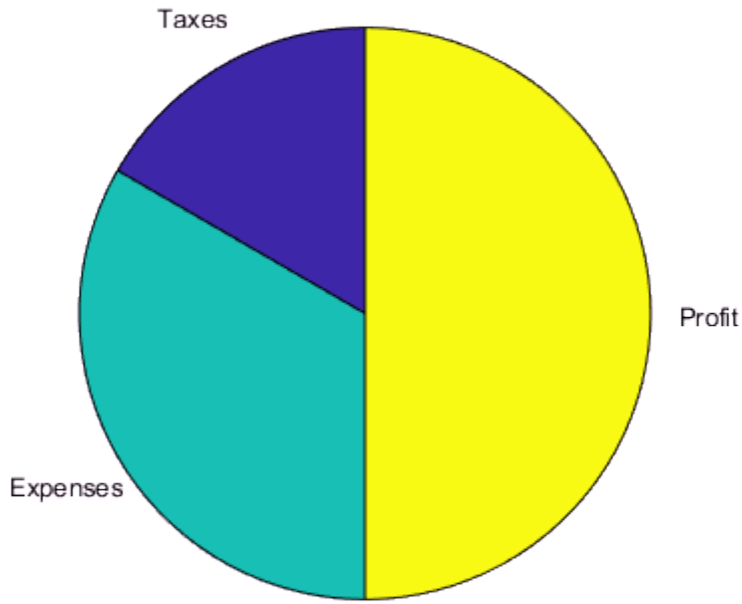

Modify Text Label for Pie Chart

Create a labeled pie chart, and then modify the color and font size of the text labels.

```
X = 1:3;
labels = {'Taxes','Expenses','Profit'};
p = pie(X,labels)
```

```
p =
  1×6 graphics array:

    Patch    Text     Patch    Text     Patch    Text
```

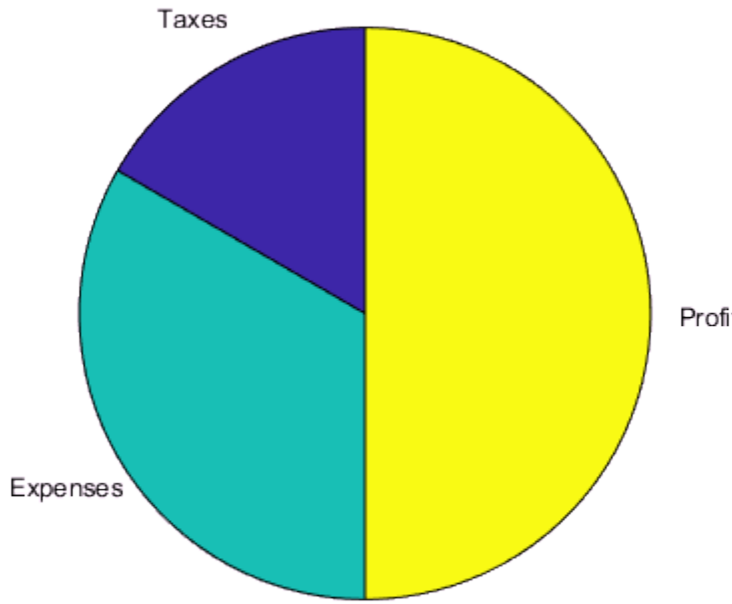

Get the text object for the label 'Profit'. Change its color and font size. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
t = p(6);
t.BackgroundColor = 'cyan';
t.EdgeColor = 'red';
t.FontSize = 14;
```

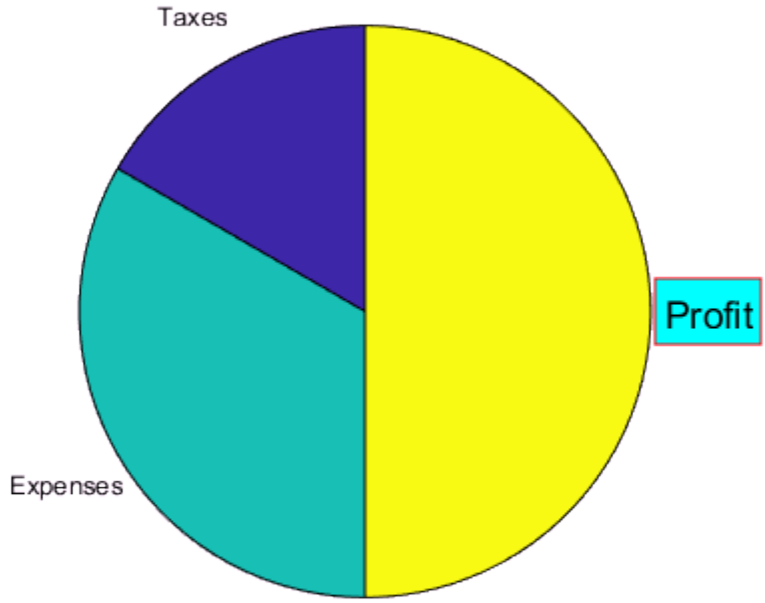

Plot Partial Pie Chart

Create a pie chart of vector X where the sum of the elements is less than 1.

```
X = [0.19 0.22 0.41];
pie(X)
```

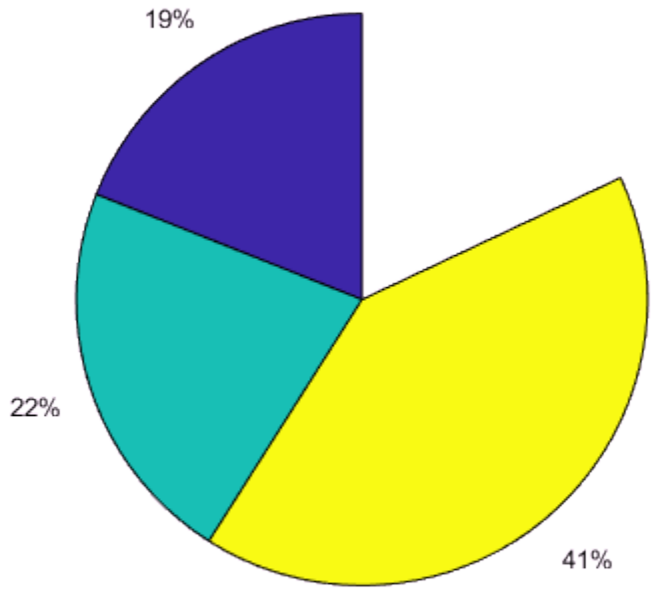

`pie` draws a partial pie because the sum of the elements is less than 1.

Plot Multiple Pie Charts

Create two vectors of data and plot and label each one in its own pie chart.

```
X = [0.2 0.4 0.4];
labels = {'Taxes','Expenses','Profit'};
ax1 = subplot(1,2,1);
pie(ax1,X,labels)
title(ax1,'2012');

Y = [0.24 0.46 0.3];
```

```
ax2 = subplot(1,2,2);
pie(ax2,Y,labels)
title(ax2,'2013');
```

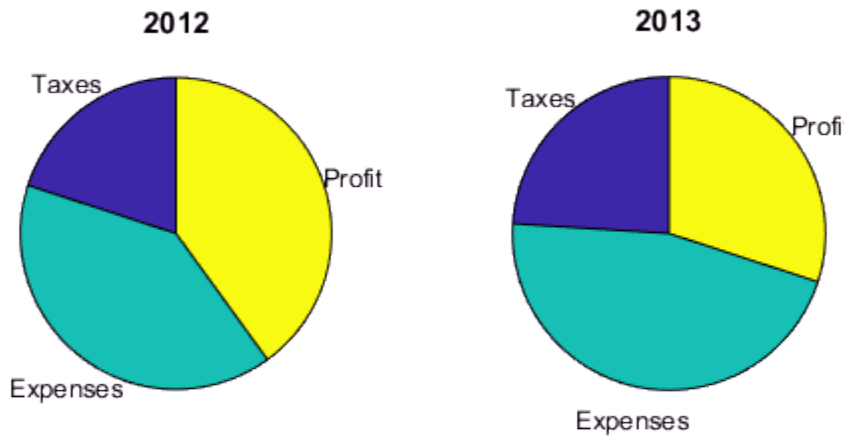

Plot Categorical Pie Chart with Offsets

Plot a categorical pie chart with offset slices corresponding to categories.

```
X = categorical({'North','South','North','East','South','West'});
explode = {'North','South'};
pie(X,explode)
```

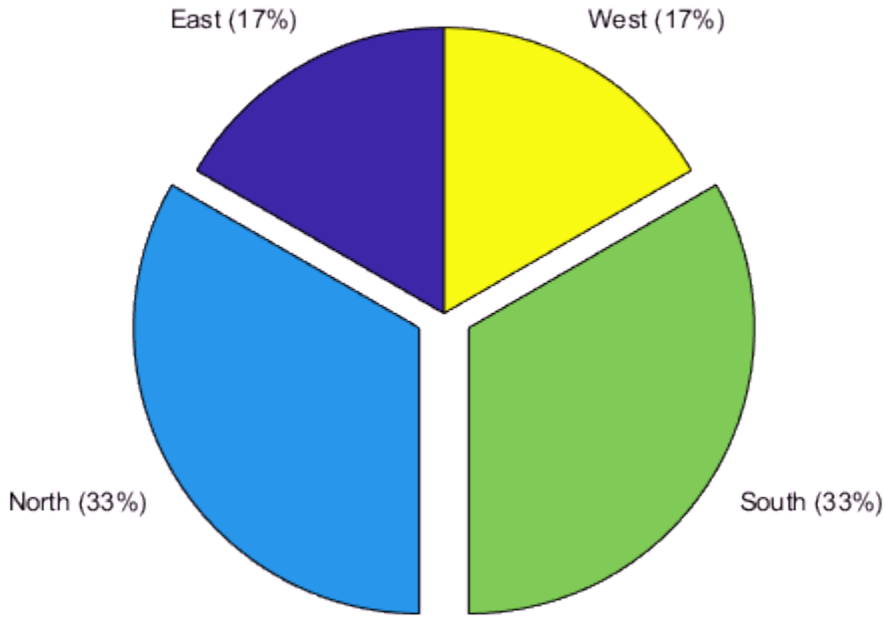

Now, use a logical vector to offset the same slices.

```
explode = [0 1 1 0];
pie(X,explode)
```

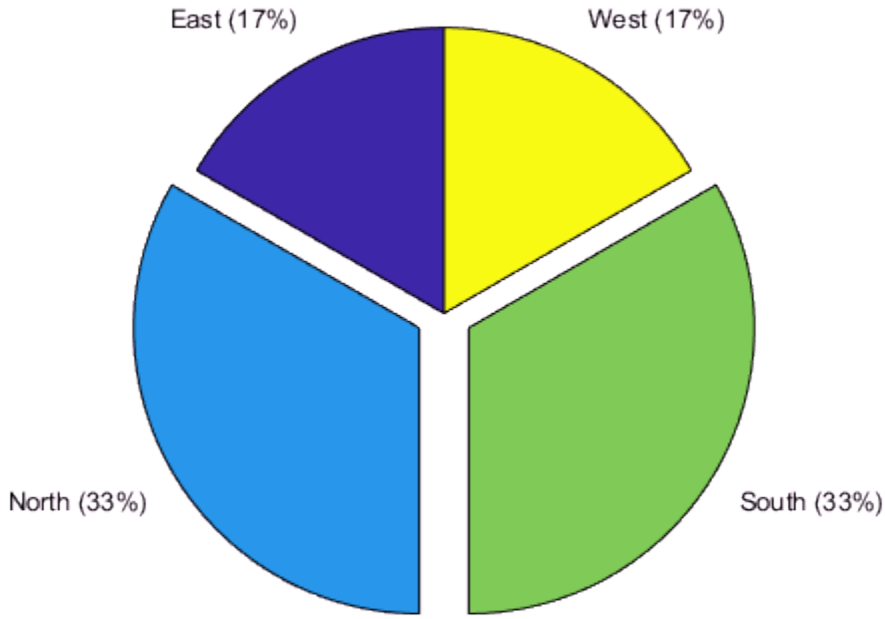

Plot Categorical Pie Chart with Labels

Plot a categorical pie chart without any offset slices and label the slices. When `X` is of data type `categorical` you must specify the input argument `explode`. To specify labels without any offset slices, specify `explode` as an empty cell array, and `labels` as the labels.

```
X = categorical({'North','South','North','East','South','West'});
explode = {};
labels = {'E','N','S','W'};
pie(X,explode,labels)
```

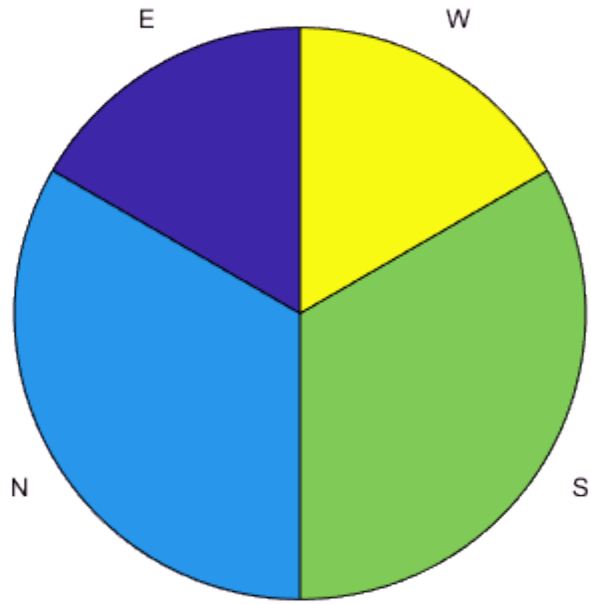

Now, offset a slice and label all slices.

```
X = categorical({'North','South','North','East','South','West'});
explode = {'West'};
labels = {'E','N','S','W'};
pie(X,explode,labels)
```

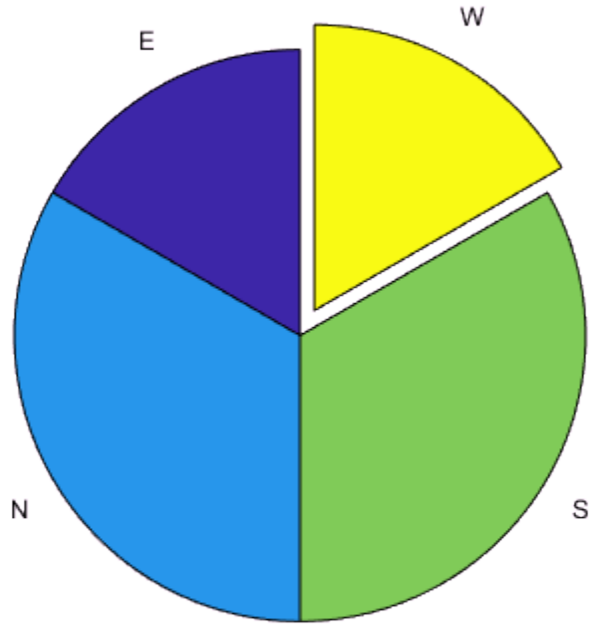

- "Offset Pie Slice with Greatest Contribution"
- "Label Pie Chart With Text and Percentages"

Input Arguments

X — Input array
vector or matrix

Input vector or matrix.

- If `X` is numeric, then all values in `X` must be finite. `pie` ignores nonpositive values.
- If `X` is categorical, then `pie` ignores undefined elements.

Data Types: `double|logical|categorical`

`explode` — Offset slices
numeric vector or matrix | cell array of character vectors

Offset slices, specified as a numeric vector or matrix or a cell array of character vectors.

- If `X` is numeric, then `explode` must be a logical or numeric vector or matrix of zeros and nonzeros that correspond to `X`. A true (nonzero) value offsets the corresponding slice from the center of the pie chart, so that `X(i,j)` is offset from the center if `explode(i,j)` is nonzero. `explode` must be the same size as `X`.
- If `X` is categorical, then `explode` can be a cell array of character vectors that are category names. `pie` offsets slices corresponding to categories in `explode`.
- If `X` is categorical, then `explode` also can be a logical or numeric vector with elements that correspond to each category in `X`. The `pie` function offsets slices corresponding to true (nonzero) in category order.

`labels` — Text labels
cell array of character vectors

Text labels for slices, specified as a cell array of character vectors.

`ax` — Axes
axes object

Axes object. Use `ax` to plot the pie chart in a specific axes instead of the current axes (`gca`).

Output Arguments

`p` — Patch and text objects
vector

Patch and text objects, returned as a vector.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the following limitations:

`X` must be a tall categorical array.

For more information, see "Tall Arrays".

See Also

See Also

`pie3`

Topics

"Offset Pie Slice with Greatest Contribution"
"Label Pie Chart With Text and Percentages"

Introduced before R2006a

pie3

3-D pie chart

Syntax

```
pie3(X)
pie3(X,explode)
pie3(...,labels)
pie3(axes_handle,...)
h = pie3(...)
```

Description

`pie3(X)` draws a three-dimensional pie chart using the data in `X`. Each element in `X` is represented as a slice in the pie chart.

- If `sum(X) ≤ 1`, then the values in `X` directly specify the area of the pie slices. `pie3` draws only a partial pie if `sum(X) < 1`.
- If the sum of the elements in `X` is greater than one, then `pie3` normalizes the values by `X/sum(X)` to determine the area of each slice of the pie.

`pie3(X,explode)` specifies whether to offset a slice from the center of the pie chart. `X(i,j)` is offset from the center of the pie chart if `explode(i,j)` is nonzero. `explode` must be the same size as `X`.

`pie3(...,labels)` specifies text labels for the slices. The number of labels must equal the number of elements in `X`.

`pie3(axes_handle,...)` plots into the axes with the handle `axes_handle` instead of into the current axes (`gca`).

`h = pie3(...)` returns a vector of handles to patch, surface, and text graphics objects.

Examples

Create 3-D Pie Chart

Create a 3-D pie chart of vector `x`.

```
x = [1,3,0.5,2.5,2];
figure
pie3(x)
```

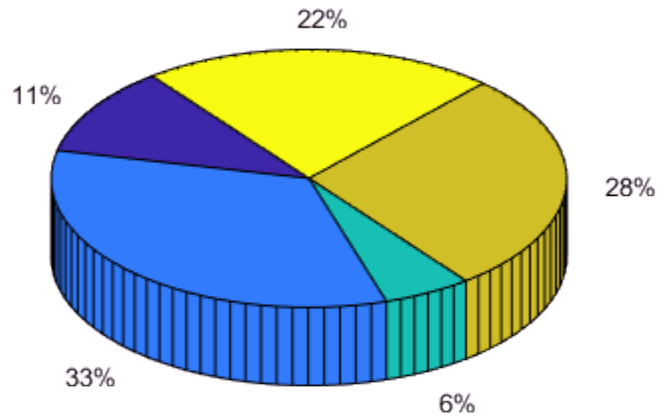

To offset the second pie slice, set the corresponding `explode` element to 1.

```
explode = [0,1,0,0,0];
figure
pie3(x,explode)
```

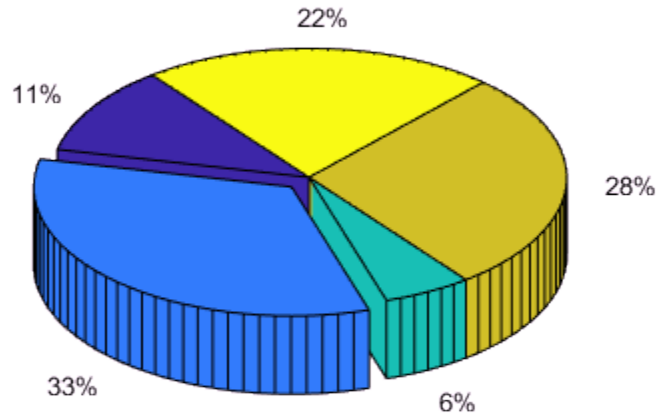

Specify Text Labels for 3-D Pie Chart

Create a 3-D pie chart and specify the text labels.

```
x = 1:3;
labels = {'Taxes','Expenses','Profit'};

figure
pie3(x,labels)
```

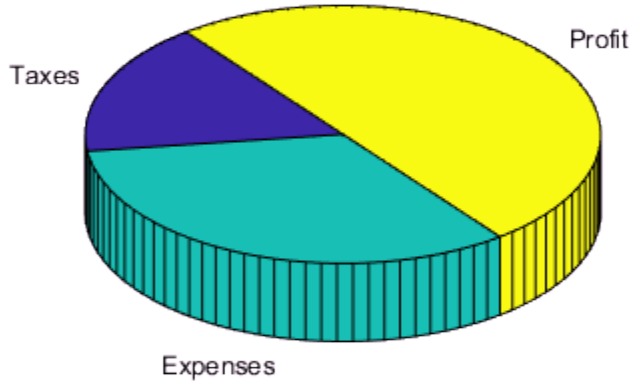

See Also

`pie`

Introduced before R2006a

pink

Pink colormap array

Syntax

```
c = pink
c = pink(m)
```

Description

`c = pink` returns the pink colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = pink(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the pink colormap.

```
surf(peaks);
colormap('pink');
```

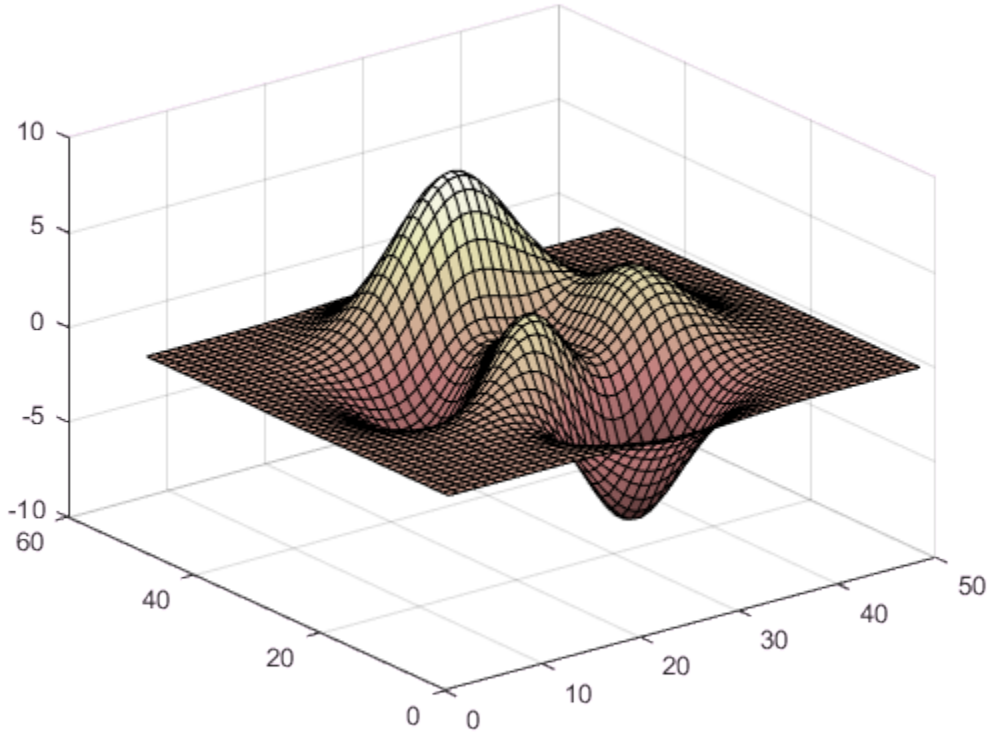

Get the pink colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = pink;
c = flipud(c);
colormap(c);
```

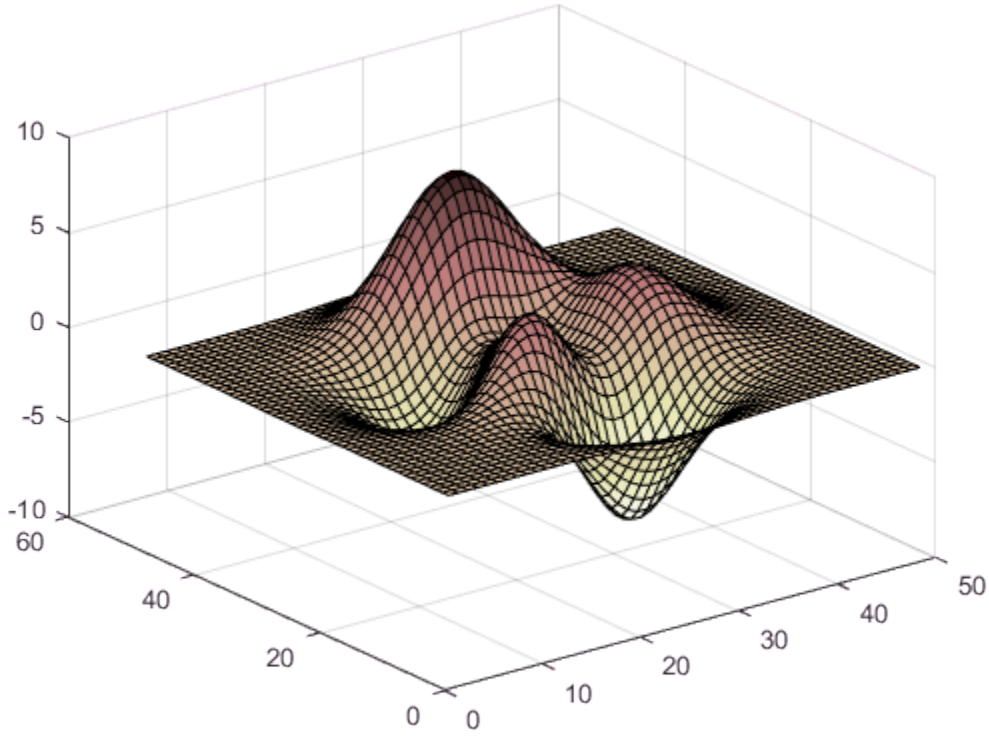

Downsample the Pink Colormap

Get a downsampled version of the pink colormap containing only twenty colors. Then display the contours of a paraboloid by applying the colormap and interpolated shading.

```
c = pink(20);
[X,Y] = meshgrid(-10:1:10);
Z = X.^2 + Y.^2;
surf(X,Y,Z);
colormap(c);
shading interp;
```

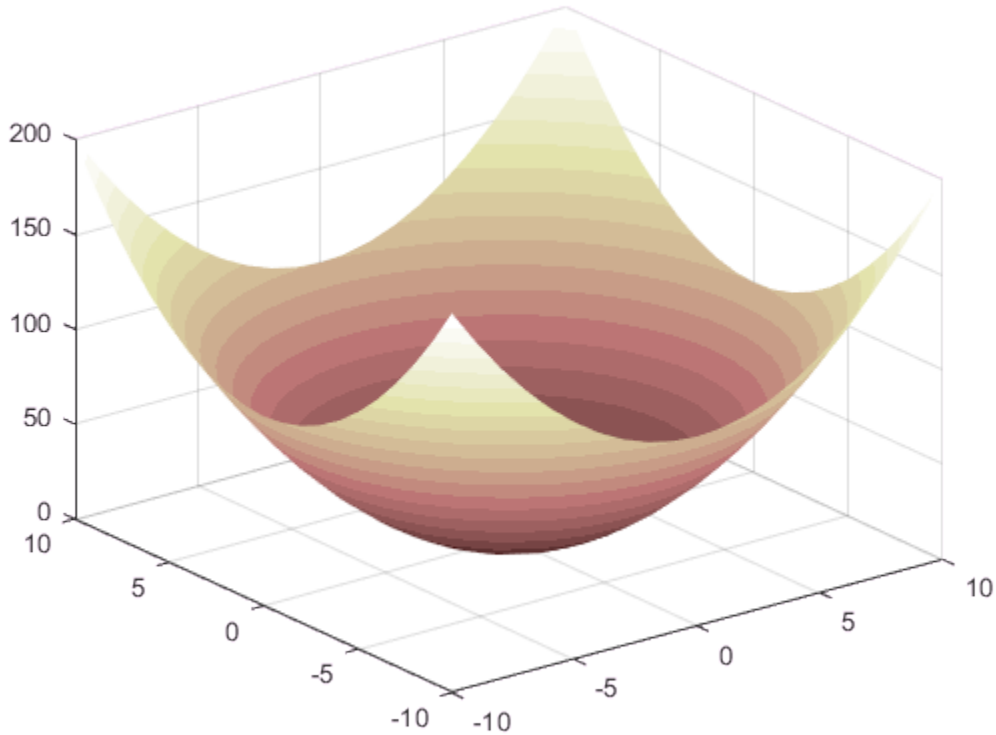

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

pinv

Moore-Penrose pseudoinverse of matrix

Syntax

```
B = pinv(A)
B = pinv(A,tol)
```

Description

`B = pinv(A)` returns the Moore-Penrose pseudoinverse of `A`.

`B = pinv(A,tol)` returns the Moore-Penrose pseudoinverse and overrides the default tolerance, `max(size(A))*eps(norm(A))`.

Examples

If `A` is square and not singular, then `pinv(A)` is an expensive way to compute `inv(A)`. If `A` is not square, or is square and singular, then `inv(A)` does not exist. In these cases, `pinv(A)` has some of, but not all, the properties of `inv(A)`.

If `A` has more rows than columns and is not of full rank, then the overdetermined least squares problem

```
minimize norm(A*x-b)
```

does not have a unique solution. Two of the infinitely many solutions are

```
x = pinv(A)*b
```

and

```
y = A\b
```

These two are distinguished by the facts that `norm(x)` is smaller than the norm of any other solution and that `y` has the fewest possible nonzero components.

For example, the matrix generated by

```
A = magic(8); A = A(:,1:6)
```

is an 8-by-6 matrix that happens to have `rank(A) = 3`.

```
A =
    64     2     3    61    60     6
     9    55    54    12    13    51
    17    47    46    20    21    43
    40    26    27    37    36    30
    32    34    35    29    28    38
    41    23    22    44    45    19
    49    15    14    52    53    11
     8    58    59     5     4    62
```

The right-hand side is `b = 260*ones(8,1)`,

```
b =
     260
     260
     260
     260
     260
     260
     260
     260
```

The scale factor 260 is the 8-by-8 magic sum. With all eight columns, one solution to `A*x = b` would be a vector of all `1`'s. With only six columns, the equations are still consistent, so a solution exists, but it is not all `1`'s. Since the matrix is rank deficient, there are infinitely many solutions. Two of them are

```
x = pinv(A)*b
```

which is

```
x =
    1.1538
    1.4615
    1.3846
    1.3846
    1.4615
    1.1538
```

and

```
y = A\b
```

which produces this result.

```
Warning: Rank deficient, rank = 3  tol =   1.8829e-013.
y =
    4.0000
    5.0000
         0
         0
         0
   -1.0000
```

Both of these are exact solutions in the sense that `norm(A*x-b)` and `norm(A*y-b)` are on the order of roundoff error. The solution `x` is special because

```
norm(x) = 3.2817
```

is smaller than the norm of any other solution, including

```
norm(y) = 6.4807
```

On the other hand, the solution `y` is special because it has only three nonzero components.

Definitions

Moore-Penrose Pseudoinverse

The Moore-Penrose pseudoinverse is a matrix `B` of the same dimensions as `A'` satisfying four conditions:

```
A*B*A = A
B*A*B = B
A*B is Hermitian
B*A is Hermitian
```

The computation is based on `svd(A)` and any singular values less than `tol` are treated as zero.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`inv` | `qr` | `rank` | `svd`

Introduced before R2006a

planerot

Givens plane rotation

Syntax

```
[G,y] = planerot(x)
```

Description

`[G,y] = planerot(x)` where `x` is a 2-component column vector, returns a 2-by-2 orthogonal matrix G so that `y = G*x` has `y(2) = 0`.

Examples

```
x = [3 4];
[G,y] = planerot(x')

G  =
    0.6000    0.8000
   -0.8000    0.6000

y =
     5
     0
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

`qrdelete` | `qrinsert`

Introduced before R2006a

play

Play audio from `audioplayer` object

Syntax

```
play(playerObj)
play(playerObj,start)
play(playerObj,[start,stop])
```

Description

`play(playerObj)` plays the audio associated with `audioplayer` object `playerObj` from beginning to end.

`play(playerObj,start)` plays audio from the sample indicated by `start` to the end.

`play(playerObj,[start,stop])` plays audio from the sample indicated by `start` to the sample indicated by `stop`.

Examples

Play with and without Blocking

Play two audio samples with and without blocking using the `play` and `playblocking` methods.

Load data from example files `chirp.mat` and `gong.mat`.

```
chirpData = load('chirp.mat');
chirpObj = audioplayer(chirpData.y,chirpData.Fs);

gongData = load('gong.mat');
gongObj = audioplayer(gongData.y,gongData.Fs);
```

Play the samples with blocking, one after the other.

```
playblocking(chirpObj);
```

```
playblocking(gongObj);
```

Play without blocking. The audio can overlap.

```
play(chirpObj);
play(gongObj);
```

Starting Sample

Play audio from the example file `handel.mat` starting 4 seconds from the beginning.

```
load handel.mat;
playerObj = audioplayer(y,Fs);
start = playerObj.SampleRate * 4;

play(playerObj,start);
```

Sample Range

Play the first 3 seconds of audio from the example file `handel.mat`.

```
load handel.mat;
playerObj = audioplayer(y,Fs);
start = 1;
stop = playerObj.SampleRate * 3;

play(playerObj,[start,stop]);
```

See Also

`audioplayer` | playblocking

Topics

"Play Audio"

play

Play audio from `audiorecorder` object

Syntax

```
player = play(recObj)
player = play(recObj, start)
player = play(recObj, [start stop])
```

Description

`player = play(recObj)` plays the audio associated with `audiorecorder` object *`recObj`* from beginning to end, and returns an `audioplayer` object.

`player = play(recObj, start)` plays audio from the sample indicated by *`start`* to the end.

`player = play(recObj, [start stop])` plays audio from the sample indicated by *`start`* to the sample indicated by *`stop`*.

Examples

Record 5 seconds of your speech with a microphone, and play it back. Display the properties of the `audioplayer` object.

```
myVoice = audiorecorder;

disp('Start speaking.');
recordblocking(myVoice, 5);
disp('End of recording. Playing back ...');

playerObj = play(myVoice);

disp('Properties of playerObj:');
get(playerObj)
```

Play back only the first 3 seconds of the speech recorded in the previous example:

```
play(myVoice, [1 myVoice.SampleRate*3]);
```

See Also

audioplayer | audiorecorder

playblocking

Play audio from `audioplayer` object, holding control until playback completes

Syntax

```
playblocking(playerObj)
playblocking(playerObj,start)
playblocking(playerObj,[start,stop])
```

Description

`playblocking(playerObj)` plays the audio associated with `audioplayer` object `playerObj` from beginning to end. `playblocking` does not return control until playback completes.

`playblocking(playerObj,start)` plays audio from the sample indicated by `start` to the end.

`playblocking(playerObj,[start,stop])` plays audio from the sample indicated by `start` to the sample indicated by `stop`.

Examples

Play with and without Blocking

Play two audio samples with and without blocking using the `play` and `playblocking` methods.

Load data from example files `chirp.mat` and `gong.mat`.

```
chirpData = load('chirp.mat');
chirpObj = audioplayer(chirpData.y,chirpData.Fs);

gongData = load('gong.mat');
gongObj = audioplayer(gongData.y,gongData.Fs);
```

Play the samples with blocking, one after the other.

```
playblocking(chirpObj);
playblocking(gongObj);
```

Play without blocking. The audio can overlap.

```
play(chirpObj);
play(gongObj);
```

Starting Sample

Play audio from the example file `handel.mat` starting 4 seconds from the beginning.

```
load handel.mat;
playerObj = audioplayer(y,Fs);
start = playerObj.SampleRate * 4;

play(playerObj,start);
```

Sample Range

Play the first 3 seconds of audio from the example file `handel.mat`.

```
load handel.mat;
playerObj = audioplayer(y,Fs);
start = 1;
stop = playerObj.SampleRate * 3;

play(playerObj,[start,stop]);
```

See Also

`audioplayer` | play

Topics

"Play Audio"

plot

2-D line plot

Syntax

```
plot(X,Y)
plot(X,Y,LineSpec)
plot(X1,Y1,...,Xn,Yn)
plot(X1,Y1,LineSpec1,...,Xn,Yn,LineSpecn)
```

```
plot(Y)
plot(Y,LineSpec)
```

```
plot( ___ ,Name,Value)
plot(ax, ___ )
```

```
h = plot( ___ )
```

Description

`plot(X,Y)` creates a 2-D line plot of the data in `Y` versus the corresponding values in `X`.

- If `X` and `Y` are both vectors, then they must have equal length. The `plot` function plots `Y` versus `X`.
- If `X` and `Y` are both matrices, then they must have equal size. The `plot` function plots columns of `Y` versus columns of `X`.
- If one of `X` or `Y` is a vector and the other is a matrix, then the matrix must have dimensions such that one of its dimensions equals the vector length. If the number of matrix rows equals the vector length, then the `plot` function plots each matrix column versus the vector. If the number of matrix columns equals the vector length, then the function plots each matrix row versus the vector. If the matrix is square, then the function plots each column versus the vector.
- If one of `X` or `Y` is a scalar and the other is either a scalar or a vector, then the `plot` function plots discrete points. However, to see the points you must specify a marker symbol, for example, `plot(X,Y,'o')`.

`plot(X,Y,LineSpec)` sets the line style, marker symbol, and color.

`plot(X1,Y1,...,Xn,Yn)` plots multiple `X`, `Y` pairs using the same axes for all lines.

`plot(X1,Y1,LineSpec1,...,Xn,Yn,LineSpecn)` sets the line style, marker type, and color for each line. You can mix `X`, `Y`, `LineSpec` triplets with `X`, `Y` pairs. For example, `plot(X1,Y1,X2,Y2,LineSpec2,X3,Y3)`.

`plot(Y)` creates a 2-D line plot of the data in `Y` versus the index of each value.

- If `Y` is a vector, then the *x*-axis scale ranges from 1 to `length(Y)`.
- If `Y` is a matrix, then the `plot` function plots the columns of `Y` versus their row number. The *x*-axis scale ranges from 1 to the number of rows in `Y`.
- If `Y` is complex, then the `plot` function plots the imaginary part of `Y` versus the real part of `Y`, such that `plot(Y)` is equivalent to `plot(real(Y),imag(Y))`.

`plot(Y,LineSpec)` sets the line style, marker symbol, and color.

`plot( ___ ,Name,Value)` specifies line properties using one or more `Name,Value` pair arguments. For a list of properties, see Chart Line Properties. Use this option with any of the input argument combinations in the previous syntaxes. `Name,Value` pair settings apply to all the lines plotted.

`plot(ax, ___ )` creates the line in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = plot( ___ )` returns a column vector of chart line objects. Use `h` to modify properties of a specific chart line after it is created. For a list of properties, see Chart Line Properties.

Examples

Create Line Plot

Define `x` as a vector of linearly spaced values between 0 and 2π. Use an increment of $\pi/100$ between the values. Define `y` as sine values of `x`.

```
x = 0:pi/100:2*pi;
y = sin(x);
```

Create a line plot of the data.

```
figure % opens new figure window
plot(x,y)
```

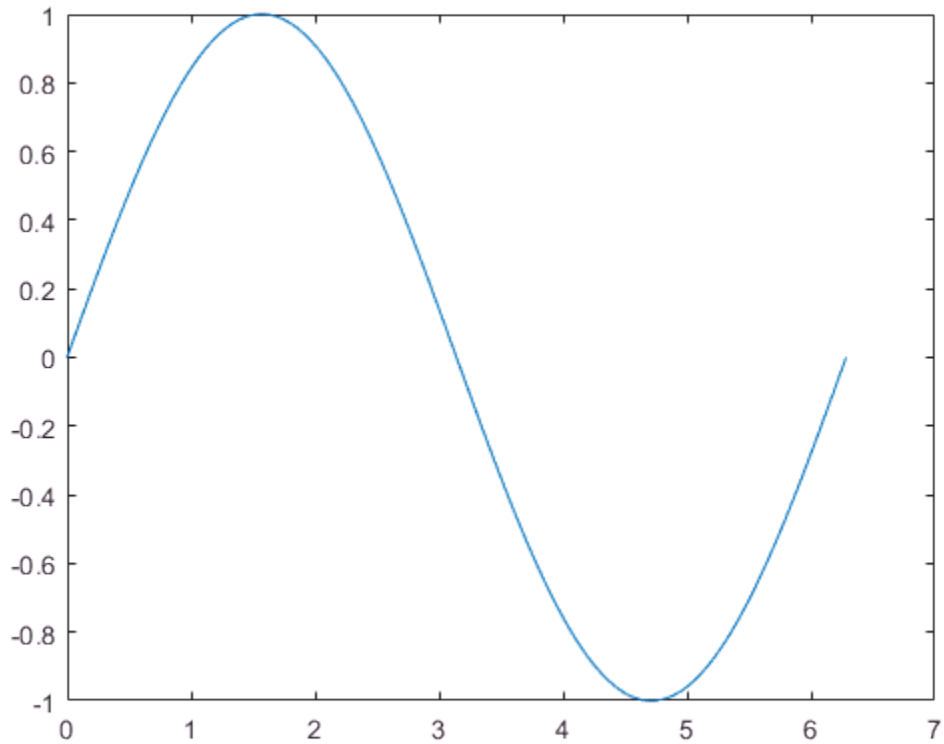

Plot Multiple Lines

Define `x` as 100 linearly spaced values between -2π and 2π. Define `y1` and `y2` as sine and cosine values of `x`. Create a line plot of both sets of data.

```
x = linspace(-2*pi,2*pi);
y1 = sin(x);
y2 = cos(x);

figure
```

```
plot(x,y1,x,y2)
```

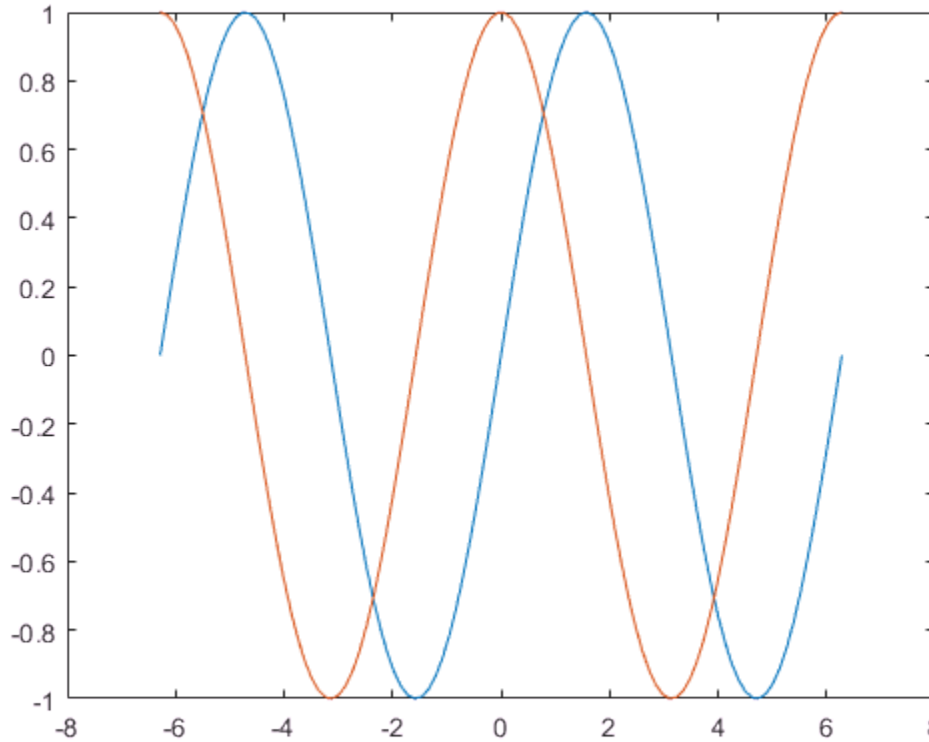

Create Line Plot From Matrix

Define `Y` as the 4-by-4 matrix returned by the `magic` function.

```
Y = magic(4)
```

```
Y =

    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1
```

Create a 2-D line plot of Y. MATLAB® plots each matrix column as a separate line.

```
figure
plot(Y)
```

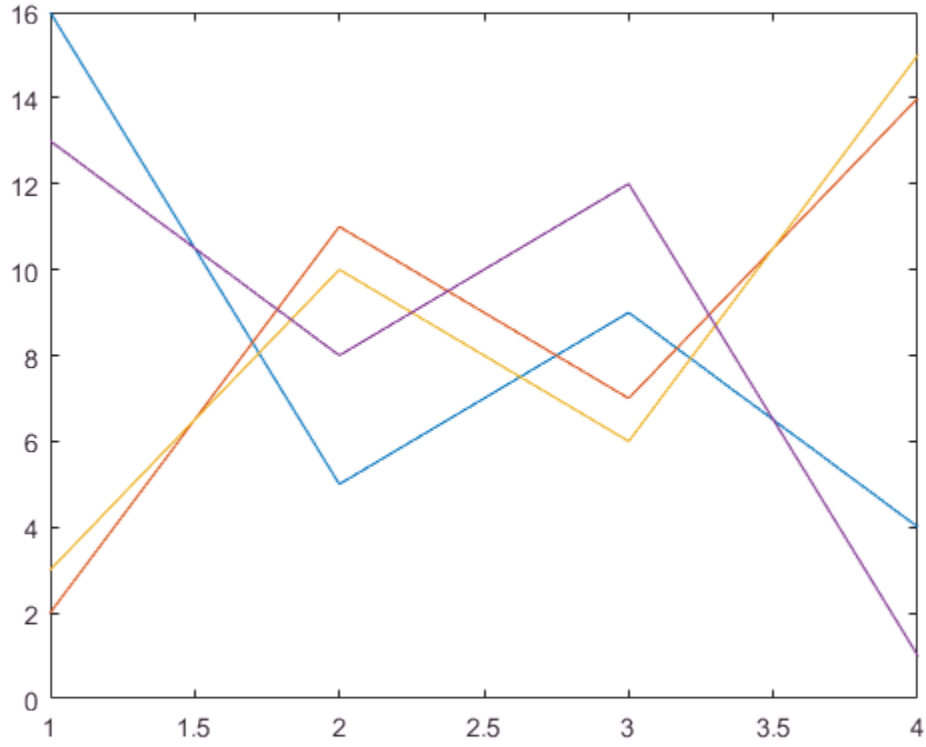

Specify Line Style

Plot three sine curves with a small phase shift between each line. Use the default line style for the first line. Specify a dashed line style for the second line and a dotted line style for the third line.

```
x = 0:pi/100:2*pi;
```

```
y1 = sin(x);
y2 = sin(x-0.25);
y3 = sin(x-0.5);

figure
plot(x,y1,x,y2,'--',x,y3,':')
```

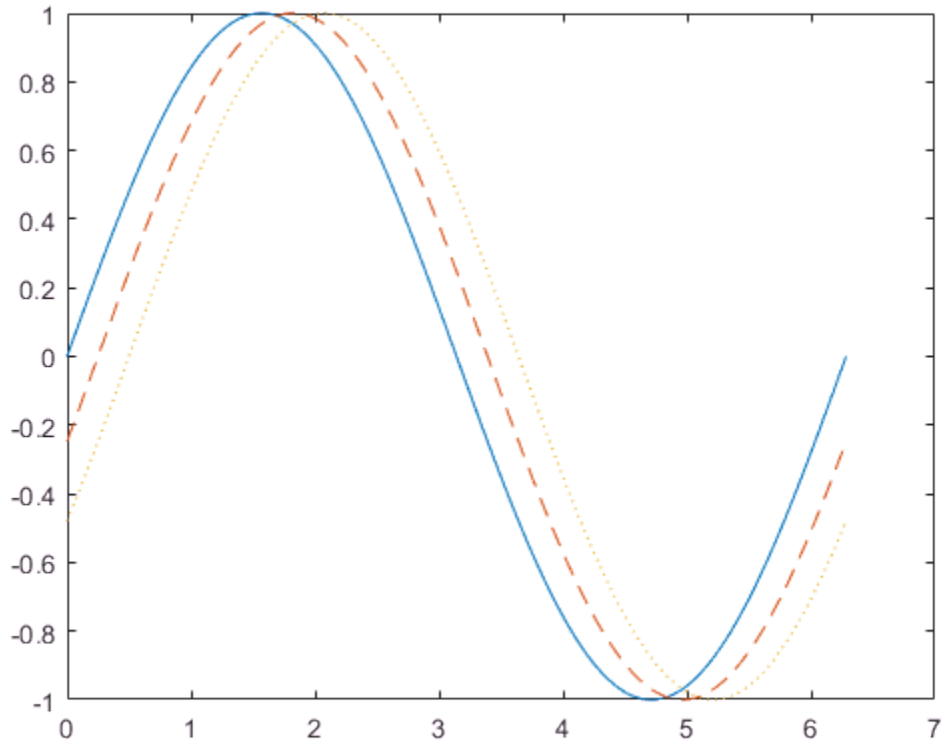

MATLAB® cycles the line color through the default color order.

Specify Line Style, Color, and Marker

Plot three sine curves with a small phase shift between each line. Use a green line with no markers for the first sine curve. Use a blue dashed line with circle markers for the second sine curve. Use only cyan star markers for the third sine curve.

```
x = 0:pi/10:2*pi;
y1 = sin(x);
y2 = sin(x-0.25);
y3 = sin(x-0.5);

figure
plot(x,y1,'g',x,y2,'b--o',x,y3,'c*')
```

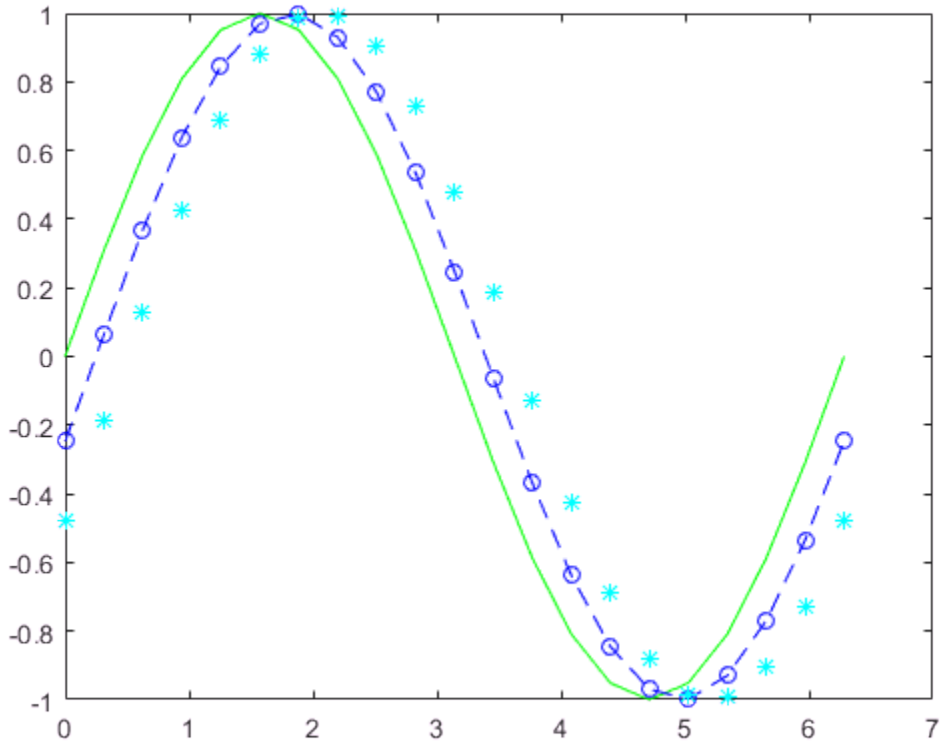

Display Markers at Specific Data Points

Create a line plot and display markers at every fifth data point by specifying a marker symbol and setting the `MarkerIndices` property as a name-value pair.

```
x = linspace(0,10);
y = sin(x);
plot(x,y,'-o','MarkerIndices',1:5:length(y))
```

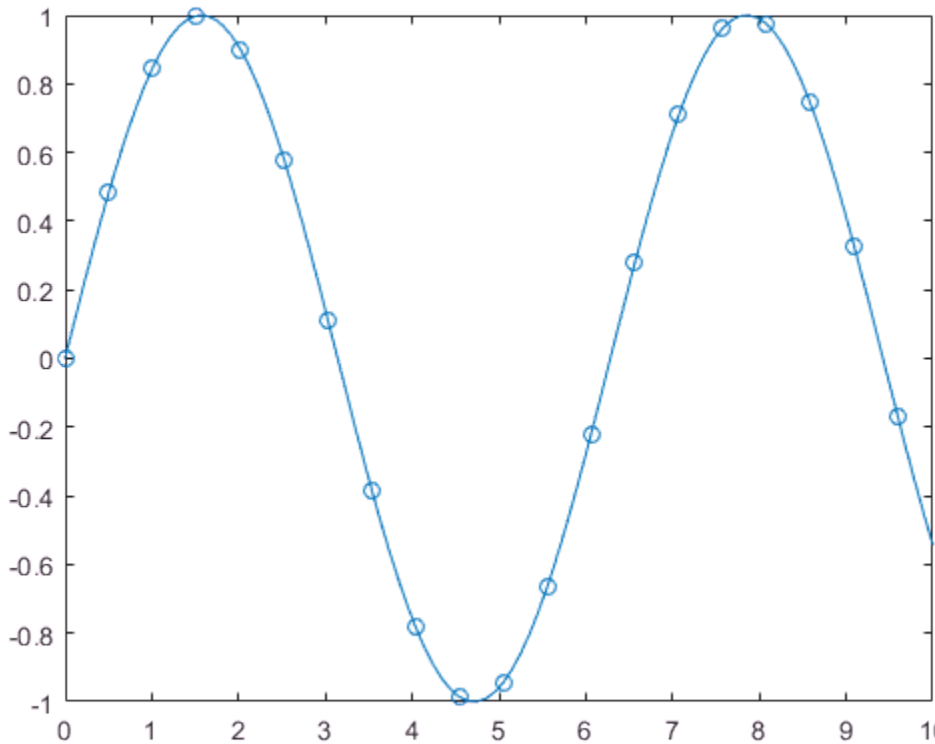

Specify Line Width, Marker Size, and Marker Color

Create a line plot and use the `LineSpec` option to specify a dashed green line with square markers. Use `Name,Value` pairs to specify the line width, marker size, and marker colors. Set the marker edge color to blue and set the marker face color using an RGB color value.

```
x = -pi:pi/10:pi;
```

```
y = tan(sin(x)) - sin(tan(x));

figure
plot(x,y,'--gs',...
    'LineWidth',2,...
    'MarkerSize',10,...
    'MarkerEdgeColor','b',...
    'MarkerFaceColor',[0.5,0.5,0.5])
```

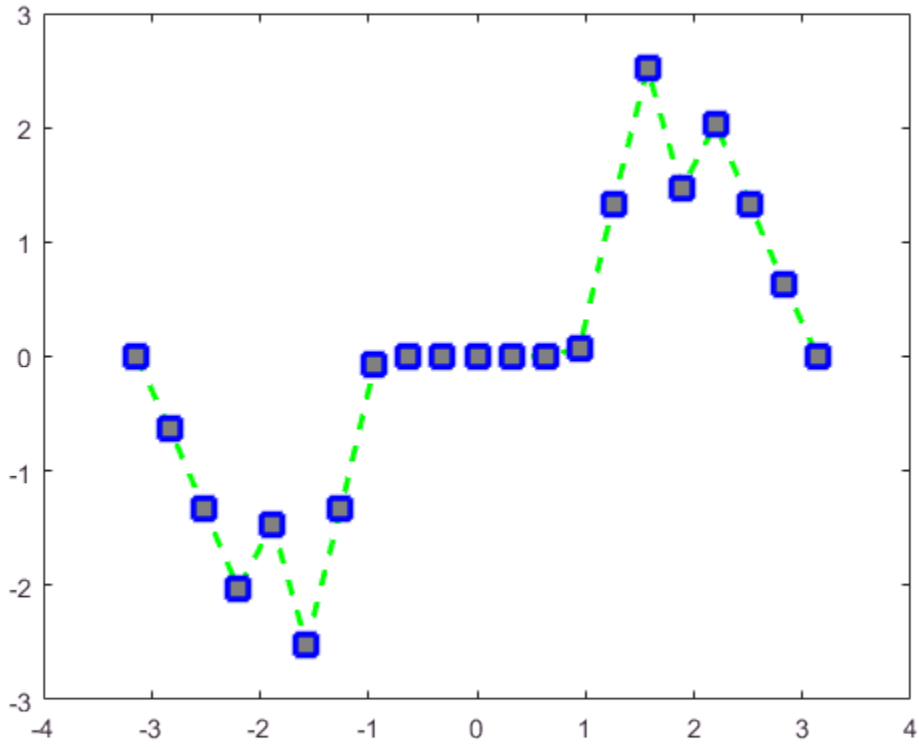

Add Title and Axis Labels

Use the `linspace` function to define `x` as a vector of 150 values between 0 and 10. Define `y` as cosine values of `x`.

```
x = linspace(0,10,150);
y = cos(5*x);
```

Create a 2-D line plot of the cosine curve. Change the line color to a shade of blue-green using an RGB color value. Add a title and axis labels to the graph using the `title`, `xlabel`, and `ylabel` functions.

```
figure
plot(x,y,'Color',[0,0.7,0.9])

title('2-D Line Plot')
xlabel('x')
ylabel('cos(5x)')
```

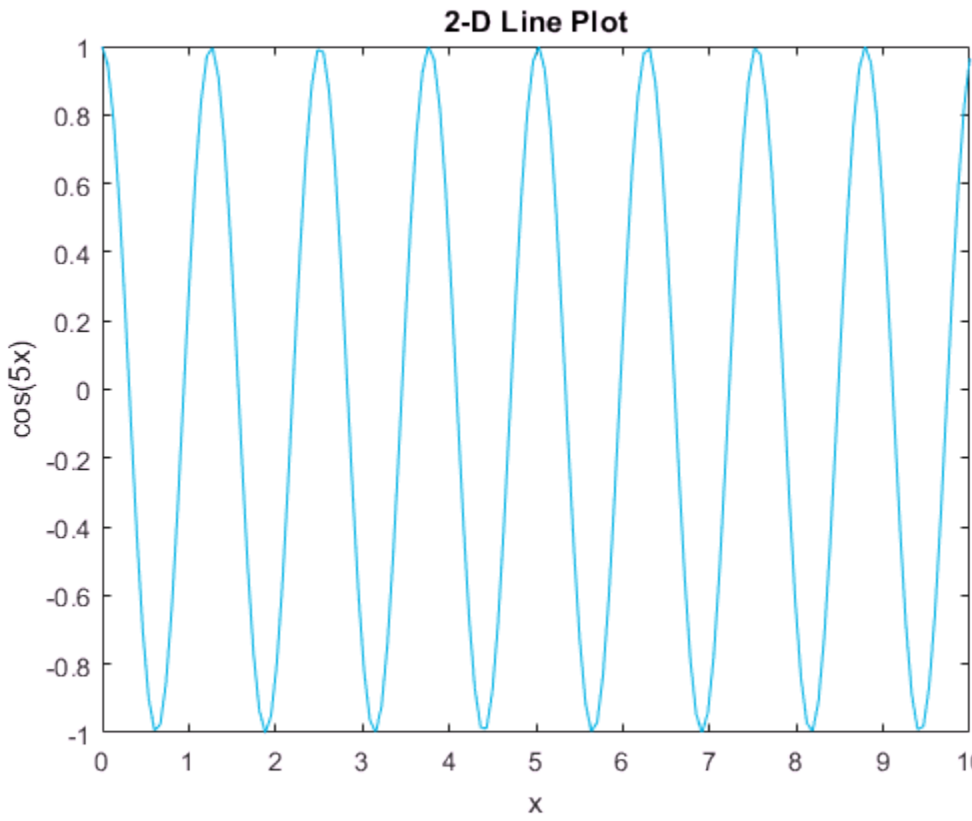

Plot Durations and Specify Tick Format

Define `t` as seven linearly spaced `duration` values between 0 and 3 minutes. Plot random data and specify the format of the `duration` tick marks using the `'DurationTickFormat'` name-value pair argument.

```
t = 0:seconds(30):minutes(3);
y = rand(1,7);

plot(t,y,'DurationTickFormat','mm:ss')
```

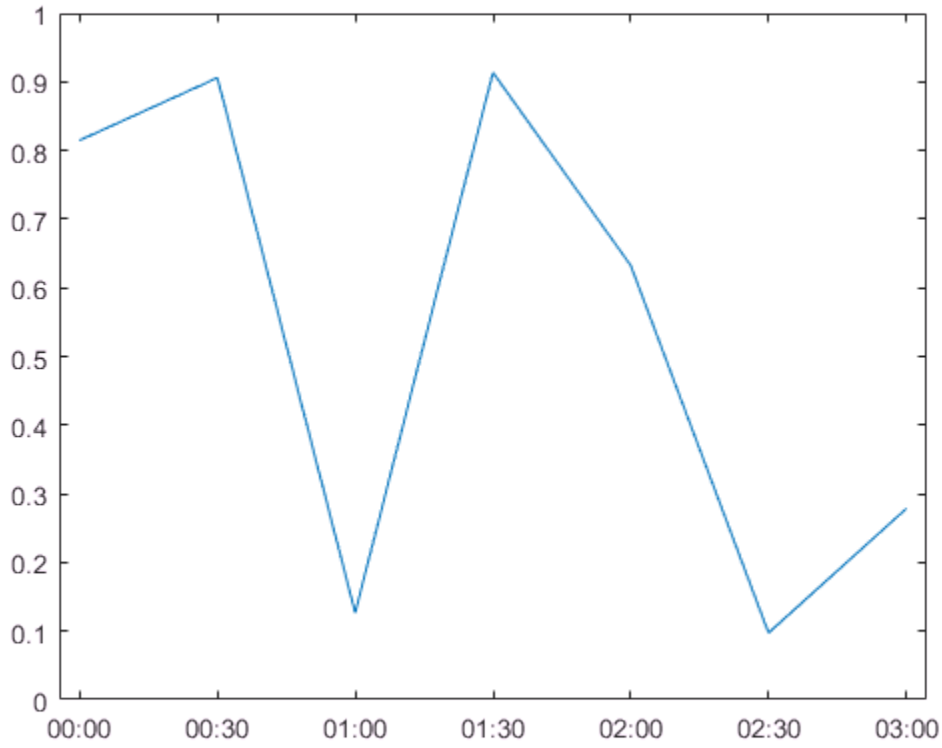

Specify Axes for Line Plot

Create a figure with two subplots and return the handle to each subplot axes, `ax1` and `ax1`.

```
figure % new figure
ax1 = subplot(2,1,1); % top subplot
ax2 = subplot(2,1,2); % bottom subplot
```

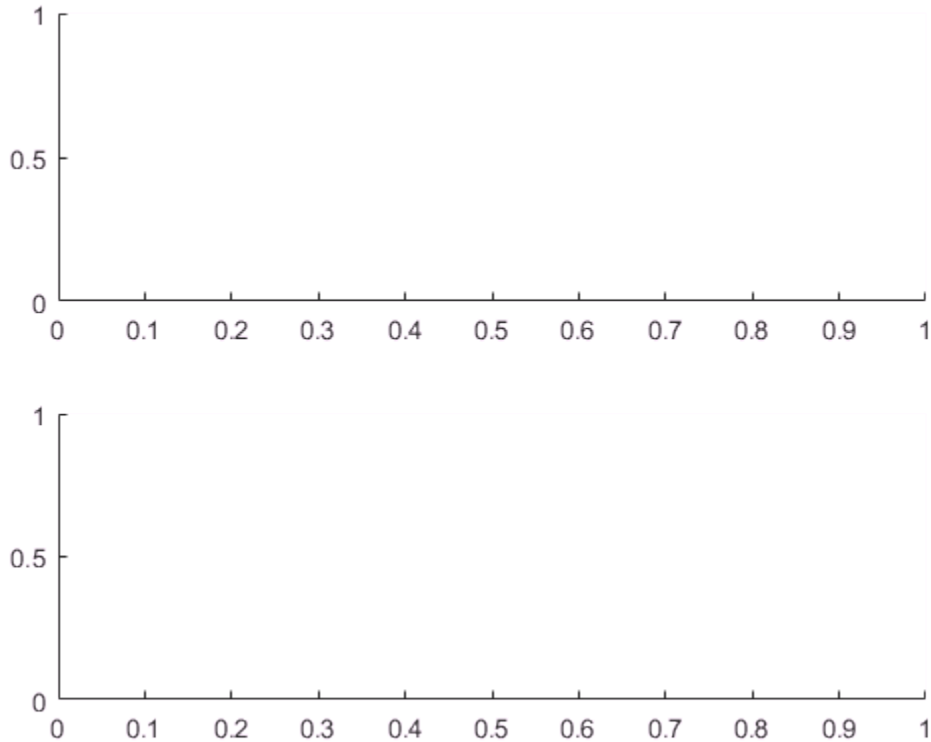

Create a 2-D line plot in each axes by referring to the axes handles. Add a title and *y*-axis label to each axes by passing the axes handles to the `title` and `ylabel` functions.

```
x = linspace(0,3);
```

```
y1 = sin(5*x);
y2 = sin(15*x);

plot(ax1,x,y1)
title(ax1,'Top Subplot')
ylabel(ax1,'sin(5x)')

plot(ax2,x,y2)
title(ax2,'Bottom Subplot')
ylabel(ax2,'sin(15x)')
```

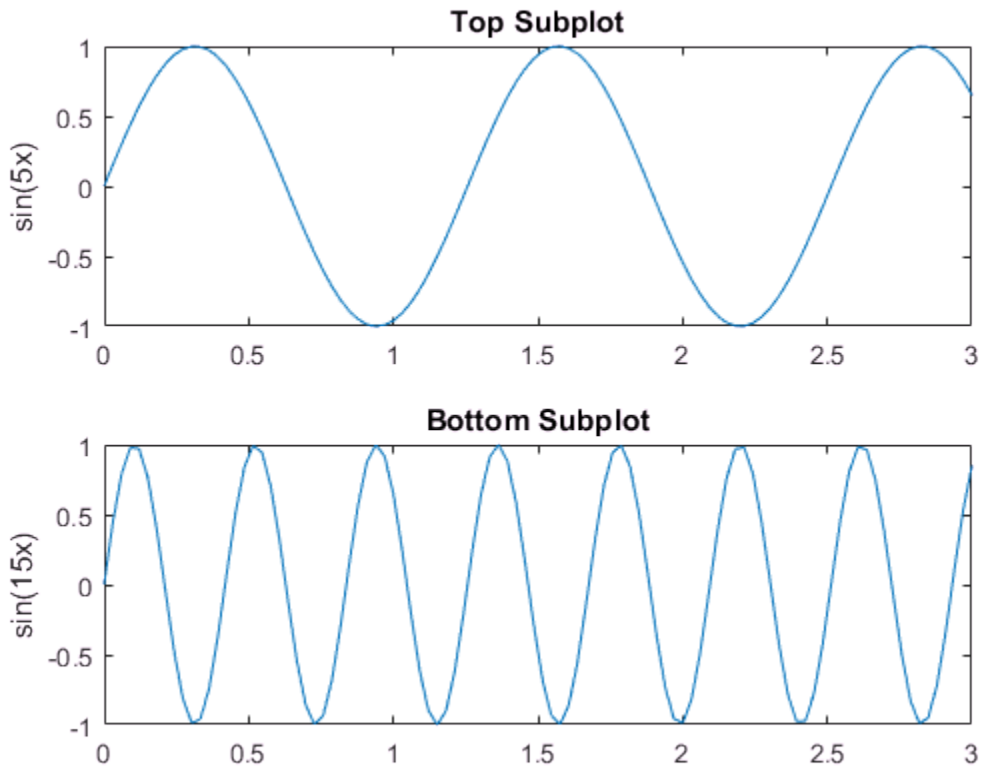

Modify Lines After Creation

Define x as 100 linearly spaced values between -2π and 2π. Define y1 and y2 as sine and cosine values of x. Create a line plot of both sets of data and return the two chart lines in p.

```
x = linspace(-2*pi,2*pi);
y1 = sin(x);
y2 = cos(x);
p = plot(x,y1,x,y2);
```

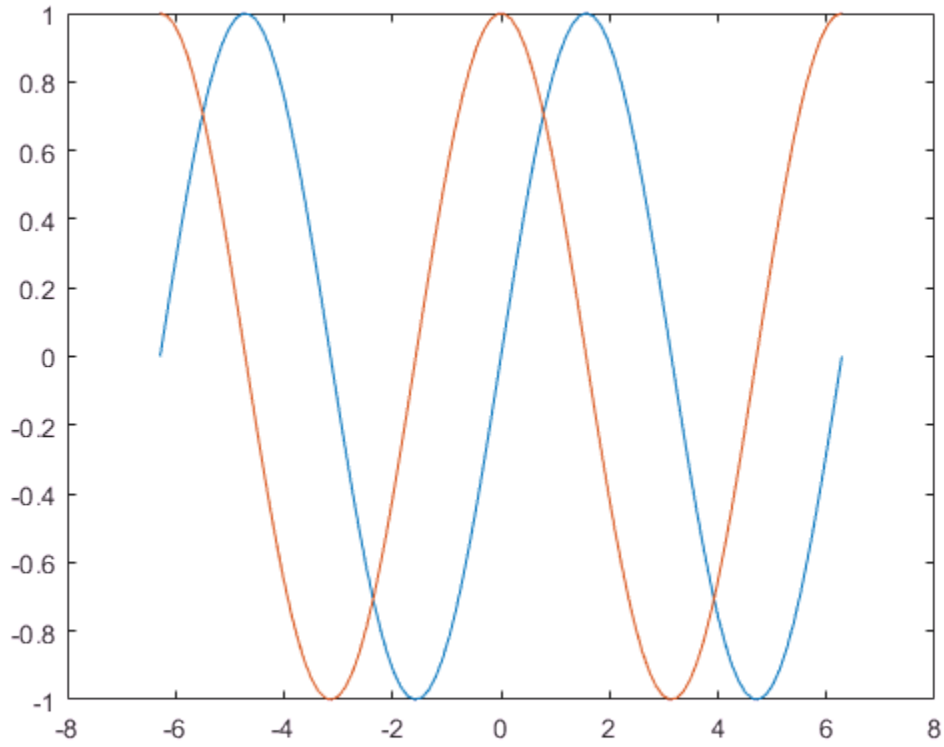

Change the line width of the first line to 2. Add star markers to the second line. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
p(1).LineWidth = 2;
p(2).Marker = '*';
```

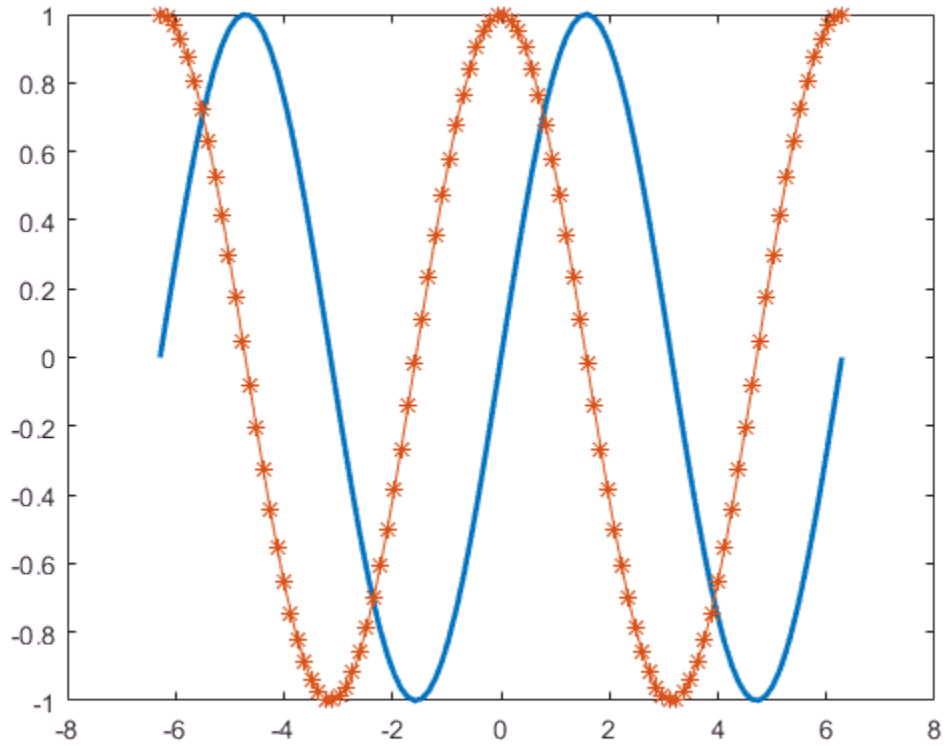

Plot Circle

Plot a circle centered at the point (4,3) with a radius equal to 2. Use `axis equal` to use equal data units along each coordinate direction.

```
r = 2;
xc = 4;
yc = 3;

theta = linspace(0,2*pi);
x = r*cos(theta) + xc;
```

```
y = r*sin(theta) + yc;
plot(x,y)
axis equal
```

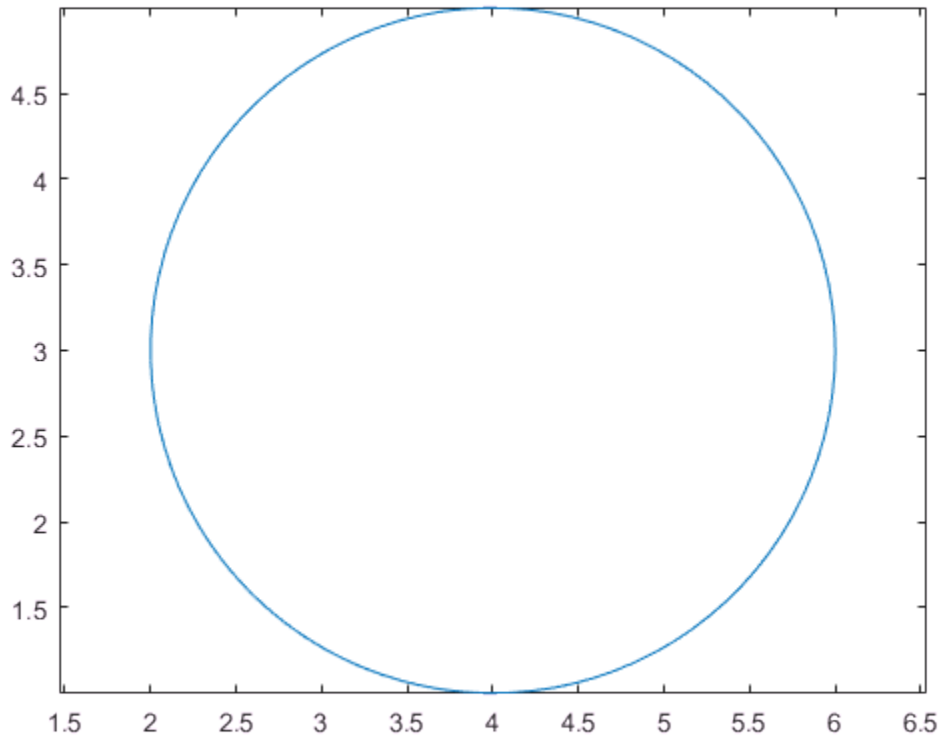

- "Plot Dates and Durations"
- "Plot Categorical Data"

Input Arguments

Y — y values
scalar | vector | matrix

y values, specified as a scalar, a vector, or a matrix. To plot against specific *x* values you must also specify `X`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`X` — x values

scalar | vector | matrix

x values, specified as a scalar, a vector, or a matrix.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`LineSpec` — Line style, marker, and color

character vector

Line style, marker, and color, specified as a character vector of symbols. The symbols can appear in any order. You do not need to specify all three characteristics (line style, marker, and color). For example, if you omit the line style and specify the marker, then the plot shows only the marker and no line.

Example: `'--or'` is a red dashed line with circle markers

Line Style	Description
`-`	Solid line (default)
`--`	Dashed line
`:`	Dotted line
`-.`	Dash-dot line

Marker	Description
`o`	Circle
`+`	Plus sign
`*`	Asterisk
`.`	Point
`x`	Cross
`s`	Square

Marker	Description
d	Diamond
^	Upward-pointing triangle
v	Downward-pointing triangle
>	Right-pointing triangle
<	Left-pointing triangle
p	Pentagram
h	Hexagram

Color	Description
y	yellow
m	magenta
c	cyan
r	red
g	green
b	blue
w	white
k	black

ax — Axes in which to plot

axes object | polar axes object

Axes in which to plot, specified as an axes object or a polar axes object. If you do not specify the axes and if the current axes are Cartesian axes, then the `plot` function uses the current axes. To plot into polar axes, specify the polar axes object as the first input argument.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The chart line properties listed here are only a subset. For a complete list, see Chart Line Properties.

Example: `'Marker','o','MarkerFaceColor','red'`

`'Color'` — Line color

`[0 0.4470 0.7410]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'LineStyle'` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	

Line Style	Description	Resulting Line
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`'Marker'` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'x'` | ...

Marker symbol, specified as one of the markers in this table. By default, a chart line does not have markers. Add markers at each data point along the line by specifying a marker symbol.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle

Value	Description
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'Marker','+'`

Example: `'Marker','diamond'`

`'MarkerIndices'` — Indices of data points at which to display markers
`1:length(YData)` (default) | vector of positive integers | scalar positive integer

Indices of data points at which to display markers, specified as a vector of positive integers. If you do not specify the indices, then MATLAB displays a marker at every data point.

Note: To see the markers, you must also specify a marker symbol.

Example: `plot(x,y,'-o','MarkerIndices',[1 5 10])` displays a circle marker at the first, fifth, and tenth data points.

Example: `plot(x,y,'-x','MarkerIndices',1:3:length(y))` displays a cross marker every three data points.

Example: `plot(x,y,'Marker','square','MarkerIndices',5)` displays one square marker at the fifth data point.

`'MarkerEdgeColor'` — Marker outline color
`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

'MarkerFaceColor' — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]

Long Name	Short Name	RGB Triplet
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.3 0.2 0.1]

Example: 'green'

'MarkerSize' — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

'DatetimeTickFormat' — Format for datetime tick labels

character vector of date format

Format for datetime tick labels, specified as the comma-separated pair consisting of 'DatetimeTickFormat' and a character vector of a date format. Use the letters A-Z and a-z to construct a custom format. These letters correspond to the Unicode Locale Data Markup Language (LDML) standard for dates. You can include non-ASCII letter characters such as a hyphen, space, or colon to separate the fields.

If you do not specify a value for 'DatetimeTickFormat', then plot automatically optimizes and updates the tick labels based on the axis limits.

Example: 'DatetimeTickFormat','eeee, MMMM d, yyyy HH:mm:ss' displays a date and time such as Saturday, April 19, 2014 21:41:06.

The following table shows several common display formats and examples of the formatted output for the date, Saturday, April 19, 2014 at 9:41:06 PM in New York City.

Value of DatetimeTickFormat	Example
'yyyy-MM-dd'	2014-04-19
'dd/MM/yyyy'	19/04/2014
'dd.MM.yyyy'	19.04.2014

Value of DatetimeTickFormat	Example
'yyyy# MM# dd#'	2014# 04# 19#
'MMMM d, yyyy'	April 19, 2014
'eeee, MMMM d, yyyy HH:mm:ss'	Saturday, April 19, 2014 21:41:06
'MMMM d, yyyy HH:mm:ss Z'	April 19, 2014 21:41:06 -0400

For a complete list of valid letter identifiers, see the Format property for datetime arrays.

`DatetimeTickFormat` is not a chart line property. You must set the tick format using the name-value pair argument when creating a plot. Alternatively, set the format using the `xtickformat` and `ytickformat` functions.

The `TickLabelFormat` property of the datetime ruler stores the format.

`'DurationTickFormat'` — Format for `duration` tick labels
character vector of duration format

Format for `duration` tick labels, specified as the comma-separated pair consisting of `'DurationTickFormat'` and a character vector of a duration format.

If you do not specify a value for `'DurationTickFormat'`, then `plot` automatically optimizes and updates the tick labels based on the axis limits.

To display a duration as a single number that includes a fractional part, for example, 1.234 hours, specify one of the values in this table.

Value of DurationTickFormat	Description
'y'	Number of exact fixed-length years. A fixed-length year is equal to 365.2425 days.
'd'	Number of exact fixed-length days. A fixed-length day is equal to 24 hours.
'h'	Number of hours
'm'	Number of minutes
's'	Number of seconds

Example: `'DurationTickFormat','h'` displays duration values in terms of fixed-length days.

To display a duration in the form of a digital timer, specify one of these values.

- `'dd:hh:mm:ss'`
- `'hh:mm:ss'`
- `'mm:ss'`
- `'hh:mm'`

In addition, you can display up to nine fractional second digits by appending up to nine `S` characters.

Example: `'DurationTickFormat','hh:mm:ss.SSS'` displays the milliseconds of a duration value to three digits.

`DurationTickFormat` is not a chart line property. You must set the tick format using the name-value pair argument when creating a plot. Alternatively, set the format using the `xtickformat` and `ytickformat` functions.

The `TickLabelFormat` property of the duration ruler stores the format.

Output Arguments

h — One or more chart line objects

scalar | vector

One or more chart line objects, returned as a scalar or a vector. These are unique identifiers, which you can use to query and modify properties of a specific chart line. For a list of properties, see Chart Line Properties.

Tips

- Use `NaN` and `Inf` values to create breaks in the lines. For example, this code plots the first two elements, skips the third element, and draws another line using the last two elements:

  ```
  plot([1,2,NaN,4,5])
  ```

- `plot` uses colors and line styles based on the `ColorOrder` and `LineStyleOrder` properties of the axes. `plot` cycles through the colors with the first line style. Then, it cycles through the colors again with each additional line style.

You can change the default colors and line styles by setting default values for the `ColorOrder` and `LineStyleOrder` properties. For example, to set the default line styles to a solid line with asterisk markers, a dotted line, and circle markers with no line, use this command:

```
set(groot,'defaultAxesLineStyleOrder',{'-*',':','o'})
```

For more information about setting defaults, see "Default Property Values".

See Also

See Also

Functions

`gca` | `hold` | `legend` | `loglog` | `plot3` | `title` | `xlabel` | `xlim` | `ylabel` | `ylim` | `yyaxis`

Properties

Chart Line Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

External Websites

MATLAB Plot Gallery

Introduced before R2006a

plot3

3-D line plot

Syntax

```
plot3(X1,Y1,Z1,...)
plot3(X1,Y1,Z1,LineSpec,...)
plot3(...,'PropertyName',PropertyValue,...)
plot3(ax,...)
h = plot3(...)
```

Description

The `plot3` function displays a three-dimensional plot of a set of data points.

`plot3(X1,Y1,Z1,...)`, where `X1`, `Y1`, `Z1` are vectors or matrices, plots one or more lines in three-dimensional space through the points whose coordinates are the elements of `X1`, `Y1`, and `Z1`. The values in `X1`, `Y1`, and `Z1` can be numeric, datetime, duration, or categorical values.

`plot3(X1,Y1,Z1,LineSpec,...)` creates and displays all lines defined by the `Xn,Yn,Zn,LineSpec` quads, where `LineSpec` is a line specification that determines line style, marker symbol, and color of the plotted lines.

`plot3(...,'PropertyName',PropertyValue,...)` sets line properties to the specified property values for all the charting lines created by `plot3`. See Chart Line Properties for a description of the properties you can set.

`plot3(ax,...)` creates the line in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = plot3(...)` returns a column vector of chart line objects.

Examples

Plot 3-D Helix

Define `t` as values between 0 and 10π. Define `st` and `ct` as vectors of sine and cosine values. Plot a 3-D helix.

```
t = 0:pi/50:10*pi;
st = sin(t);
ct = cos(t);

figure
plot3(st,ct,t)
```

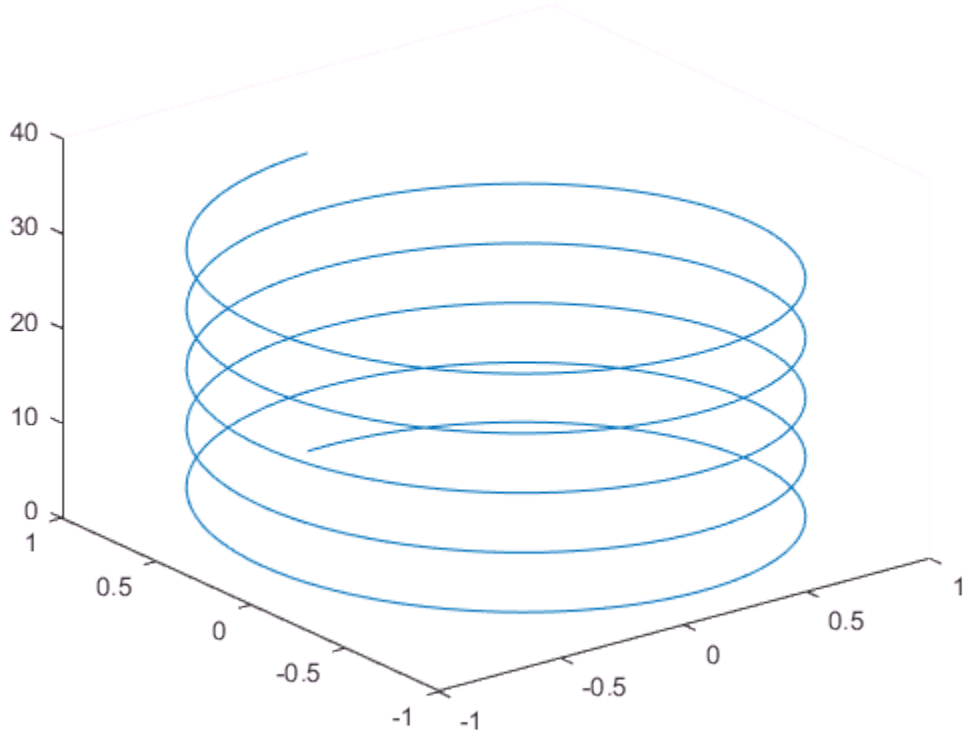

- "Plot Dates and Durations"
- "Plot Categorical Data"

Tips

If one or more of `X1`, `Y1`, `Z1` is a vector, the vectors are plotted versus the rows or columns of the matrix, depending whether the vectors' lengths equal the number of rows or the number of columns.

You can mix `Xn,Yn,Zn` triples with `Xn,Yn,Zn,`*`LineSpec`* quads, for example,

```
plot3(X1,Y1,Z1,X2,Y2,Z2,LineSpec,X3,Y3,Z3)
```

See `LineSpec` and `plot` for information on line types and markers.

See Also

See Also

Functions

`axis` | `bar3` | `LineSpec` | `loglog` | `plot` | `scatter3` | `subplot`

Properties

Chart Line Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

plotbrowser

Show or hide figure **Plot Browser**

Syntax

```
plotbrowser('on')
plotbrowser('off')
plotbrowser
plotbrowser(figure_handle,...)
```

Description

`plotbrowser('on')` displays the Plot Browser on the current figure.

`plotbrowser('off')` hides the Plot Browser on the current figure.

`plotbrowser` toggles the visibility of the Plot Browser on the current figure. You can use `plotbrowser('toggle')` instead for the same functionality.

`plotbrowser(figure_handle,...)` shows or hides the Plot Browser on the figure specified by `figure_handle`.

Examples

Open Plot Browser

Plot a 5-by-5 matrix of random numbers. Then, open the plot browser.

```
plot(rand(5))
plotbrowser('on')
```

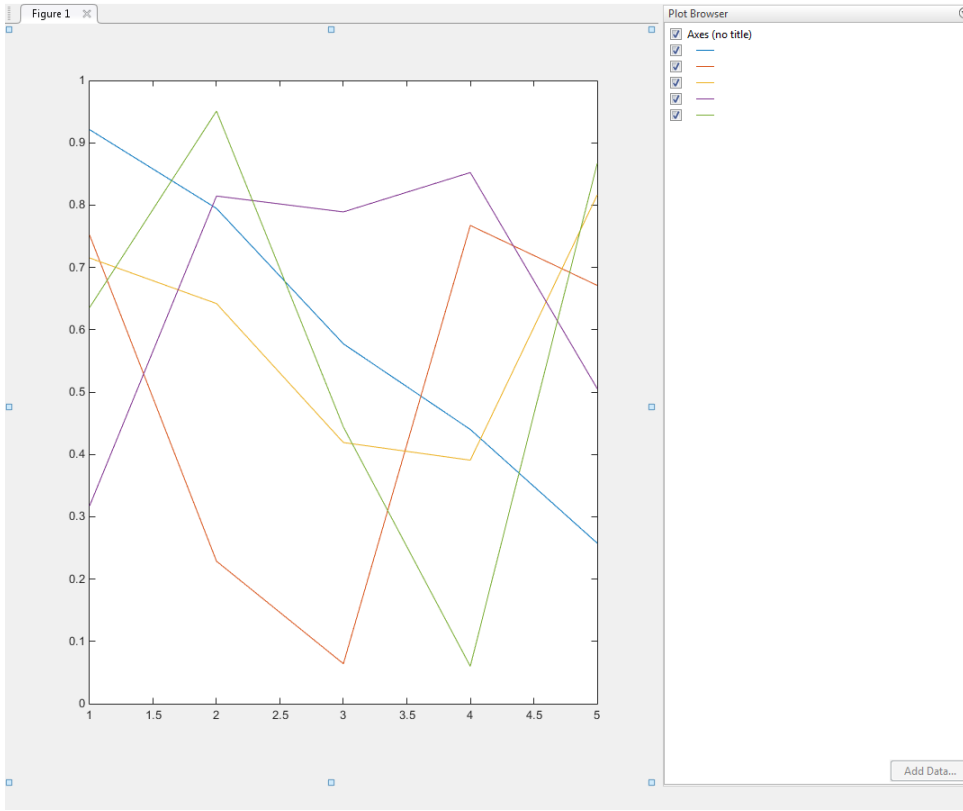

Tips

If you call `plotbrowser` in a MATLAB program and subsequent lines depend on the Plot Browser being fully initialized, follow it by `drawnow` to ensure complete initialization.

Alternatives

To collectively enable the plot tools, use the larger icon on the figure toolbar. To collectively disable the plot tools, use the smaller icon . Open or close the **Plot Browser** tool from the figure's **View** menu.

See Also

`plottools` | `figurepalette` | `propertyeditor`

Introduced before R2006a

plotedit

Interactively edit and annotate plots

Syntax

```
plotedit on
plotedit off
plotedit
plotedit(h)
plotedit(state)
plotedit(h,state)
```

Description

`plotedit on` starts plot edit mode for the current figure, allowing you to use a graphical interface to annotate and edit plots easily. In plot edit mode, you can label axes, change line styles, and add text, line, and arrow annotations.

`plotedit off` ends plot mode for the current figure.

`plotedit` toggles the plot edit mode for the current figure.

`plotedit(h)` toggles the plot edit mode for the figure specified by figure handle `h`.

`plotedit(state)` specifies the `plotedit` state for the current figure. Values for `state` can be as shown.

Value for state	Description
`'on'`	Starts plot edit mode
`'off'`	Ends plot edit mode
`'showtoolsmenu'`	Displays the **Tools** menu in the menu bar
`'hidetoolsmenu'`	Removes the **Tools** menu from the menu bar

Note `'hidetoolsmenu'` is intended for UI developers who do not want the **Tools** menu to appear in applications that use the figure window.

`plotedit(h,state)` specifies the `plotedit` `state` for figure handle `h`.

Examples

Start plot edit mode for figure 2.

```
plotedit(2)
```

End plot edit mode for figure 2.

```
plotedit(2, 'off')
```

Hide the **Tools** menu for the current figure:

```
plotedit('hidetoolsmenu')
```

See Also

`axes` | `line` | `open` | `plot` | `print` | `saveas` | `text` | `propedit`

Introduced before R2006a

plotmatrix

Scatter plot matrix

Syntax

```
plotmatrix(X,Y)
plotmatrix(X)
plotmatrix( ___ ,LineSpec)
```

```
[S,AX,BigAx,H,HAx] = plotmatrix( ___ )
```

Description

`plotmatrix(X,Y)` creates a matrix of subaxes containing scatter plots of the columns of `X` against the columns of `Y`. If `X` is *p*-by-*n* and `Y` is *p*-by-*m*, then `plotmatrix` produces an *n*-by-*m* matrix of subaxes.

`plotmatrix(X)` is the same as `plotmatrix(X,X)` except that the subaxes along the diagonal are replaced with histogram plots of the data in the corresponding column of `X`. For example, the subaxes along the diagonal in the *i*th column is replaced by `histogram(X(:,i))`.

`plotmatrix( ___ ,LineSpec)` specifies the line style, marker symbol, and color for the scatter plots. The option `LineSpec` can be preceded by any of the input argument combinations in the previous syntaxes.

`[S,AX,BigAx,H,HAx] = plotmatrix( ___ )` returns the graphic objects created as follows:

- `S` – Chart line objects for the scatter plots
- `AX` – Axes objects for each subaxes
- `BigAx` – Axes object for big axes that frames the subaxes
- `H` – Histogram objects for the histogram plots
- `HAx` – Axes objects for the invisible histogram axes

`BigAx` is left as the current axes (`gca`) so that a subsequent `title`, `xlabel`, or `ylabel` command centers text with respect to the big axes.

Examples

Create Scatter Plot Matrix with Two Matrix Inputs

Create X as a matrix of random data and Y as a matrix of integer values. Then, create a scatter plot matrix of the columns of X against the columns of Y.

```
X = randn(50,3);
Y = reshape(1:150,50,3);
plotmatrix(X,Y)
```

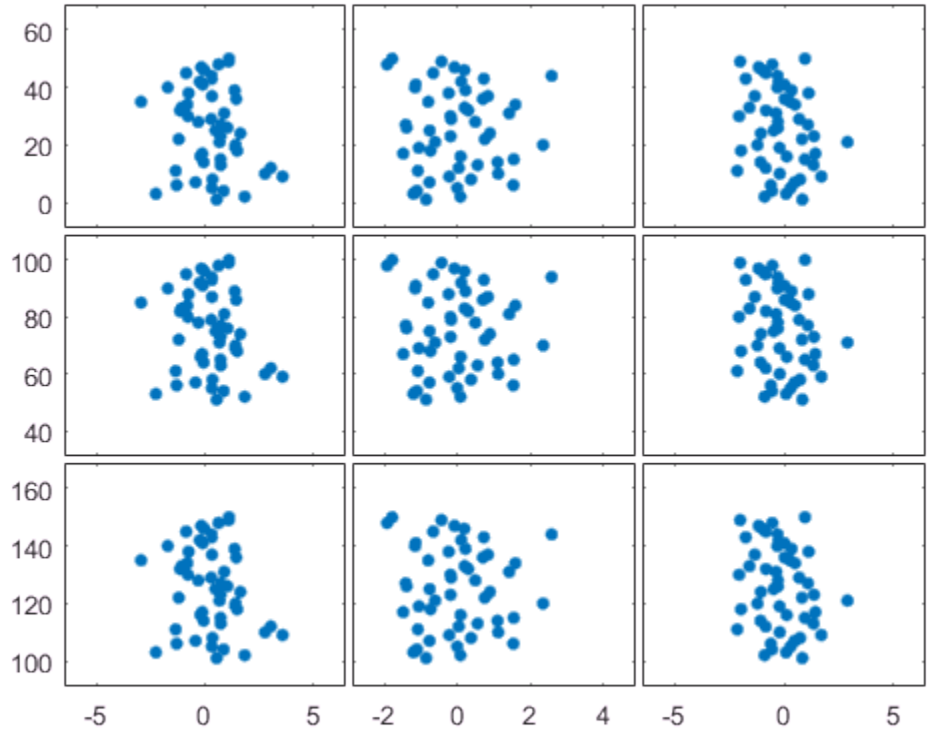

The subplot in the ith row, jth column of the figure is a scatter plot of the ith column of Y against the jth column of X.

Create Scatter Plot Matrix with One Matrix Input

Create a scatter plot matrix of random data. The subplot in the ith row, jth column of the matrix is a scatter plot of the ith column of X against the jth column of X. Along the diagonal are histogram plots of each column of X.

```
X = randn(50,3);
plotmatrix(X)
```

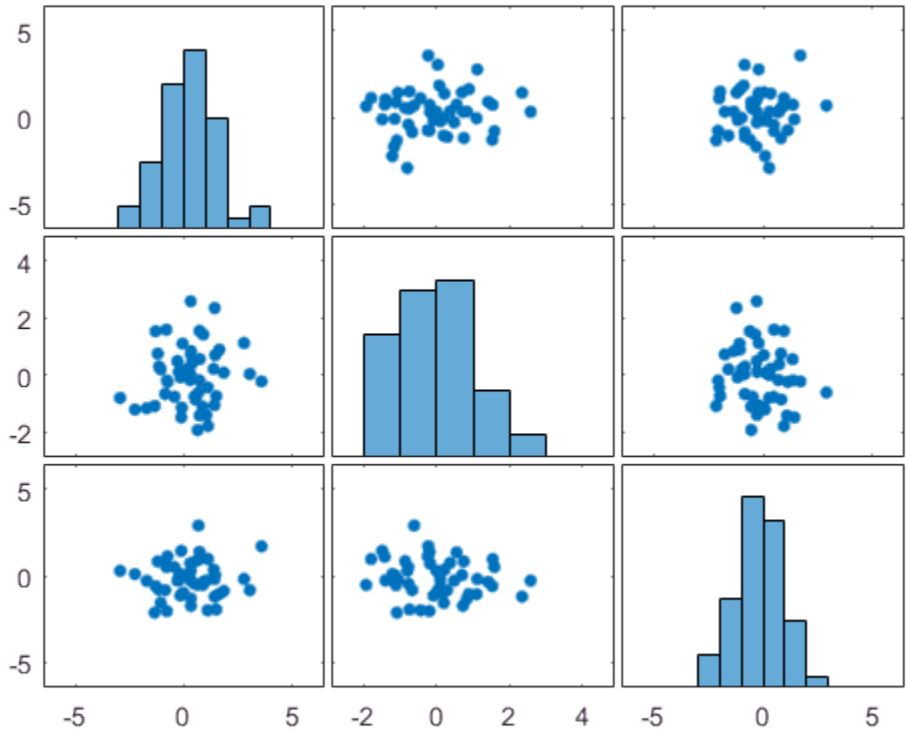

Specify Marker Type and Color

Create a scatter plot matrix of random data. Specify the marker type and the color for the scatter plots.

```
X = randn(50,3);
plotmatrix(X,'*r')
```

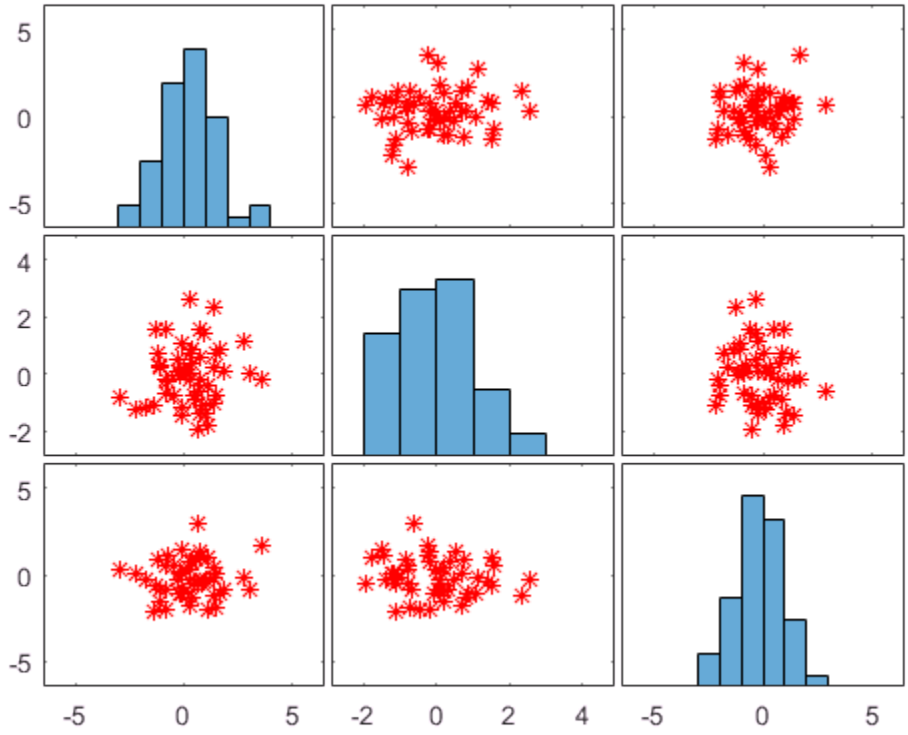

The `LineSpec` option sets properties for the scatter plots. To set properties for the histogram plots, return the histogram objects.

Modify Scatter Plot Matrix After Creation

Create a scatter plot matrix of random data.

```
rng default
X = randn(50,3);
[S,AX,BigAx,H,HAx] = plotmatrix(X);
```

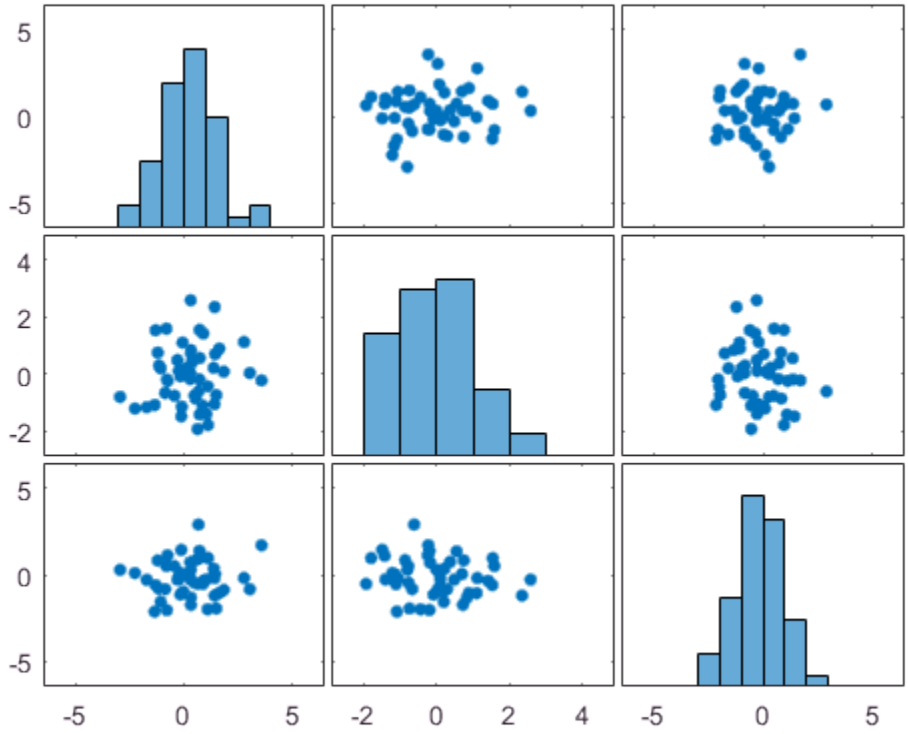

To set properties for the scatter plots, use `S`. To set properties for the histograms, use `H`. To set axes properties, use `AX`, `BigAx`, and `HAx`. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

Set the color and marker type for the scatter plot in the lower left corner of the figure. Set the color for the histogram plot in the lower right corner. Use the `title` command to title the figure.

```
S(3).Color = 'g';
S(3).Marker = '*';

H(3).EdgeColor = 'k';
H(3).FaceColor = 'g';
```

```
title(BigAx,'A Comparison of Data Sets')
```

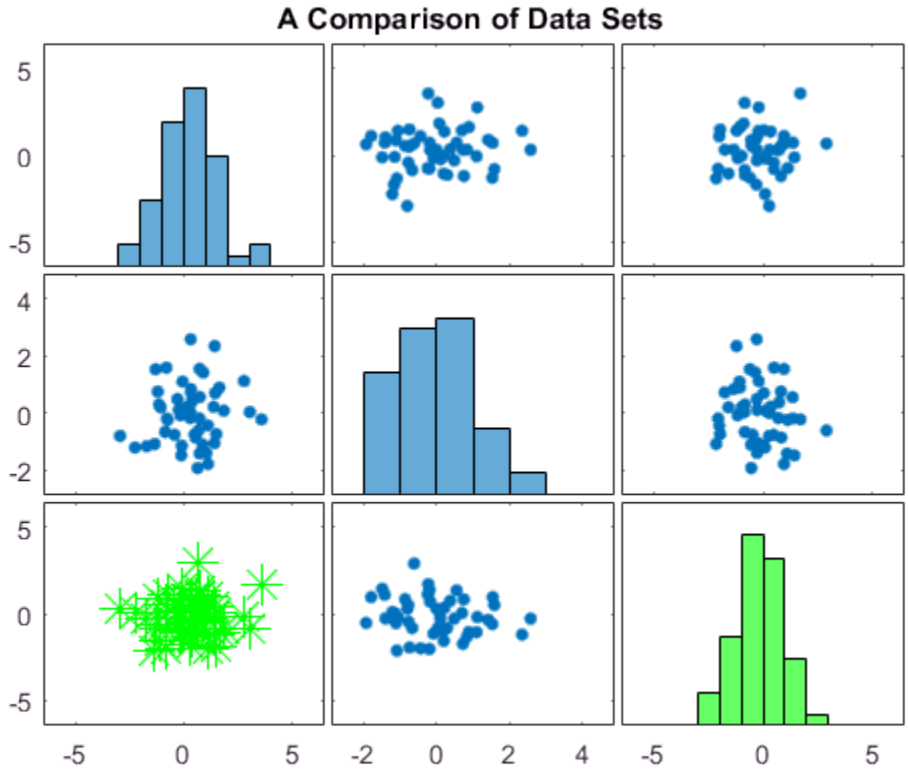

Input Arguments

X — Data to display

matrix

Data to display, specified as a matrix.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Y — Data to plot against X
matrix

Data to plot against X, specified as a matrix.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

LineSpec — Line style, marker symbol, and color for scatter plots
character vector

Line style, marker symbol, and color for the scatter plots, specified as a character vector. For more information on line style, marker symbol, and color options see `LineSpec`.

Example: `':*r'`

Output Arguments

S — Chart line objects for scatter plots
matrix

Chart line objects for the scatter plots, returned as a matrix. These are unique identifiers, which you can use to query and modify the properties of a specific scatter plot.

AX — Axes objects for subaxes
matrix

Axes objects for the subaxes, returned as a matrix. These are unique identifiers, which you can use to query and modify the properties of a specific subaxes.

BigAx — Axes object for big axes
scalar

Axes object for big axes, returned as a scalar. This is a unique identifier, which you can use to query and modify properties of the big axes.

H — Histogram objects
vector | []

Histogram objects, returned as a vector or `[]`. These are unique identifiers, which you can use to query and modify the properties of a specific histogram object. If no histogram plots are created, then H is returned as empty brackets.

Note: Starting in R2015b, H is a vector of histogram objects, In previous releases, it was a vector of patch objects.

HAx — Axes objects for invisible histogram axes

vector | []

Axes objects for invisible histogram axes, returned as a vector or `[]`. These are unique identifiers, which you can use to query and modify the properties of a specific axes. If no histogram plots are created, then HAx is returned as empty brackets.

See Also

See Also

`scatter` | `scatter3`

Introduced before R2006a

plottools

Show or hide plot tools

Syntax

```
plottools('on')
plottools('off')
plottools
plottools(figure_handle,...)
plottools(...,'tool')
```

Description

`plottools('on')` displays the Figure Palette, Plot Browser, and Property Editor on the current figure, configured as you last used them.

`plottools('off')` hides the Figure Palette, Plot Browser, and Property Editor on the current figure.

`plottools` with no arguments, is the same as `plottools('on')`

`plottools(figure_handle,...)` displays or hides the plot tools on the specified figure instead of on the current figure.

`plottools(...,'tool')` operates on the specified tool only. `'tool'` can be one of these values:

- `'figurepalette'`
- `'plotbrowser'`
- `'propertyeditor'`

Note: The first time you open the plotting tools, all three of them appear, grouped around the current figure as shown above. If you close, move, or undock any of the tools, MATLAB remembers the configuration you left them in and restores it when you invoke the tools for subsequent figures, both within and across MATLAB sessions.

Examples

Open Plot Tools

Create a line plot and open the plot tools.

```
plot(1:10);
plottools('on')
```

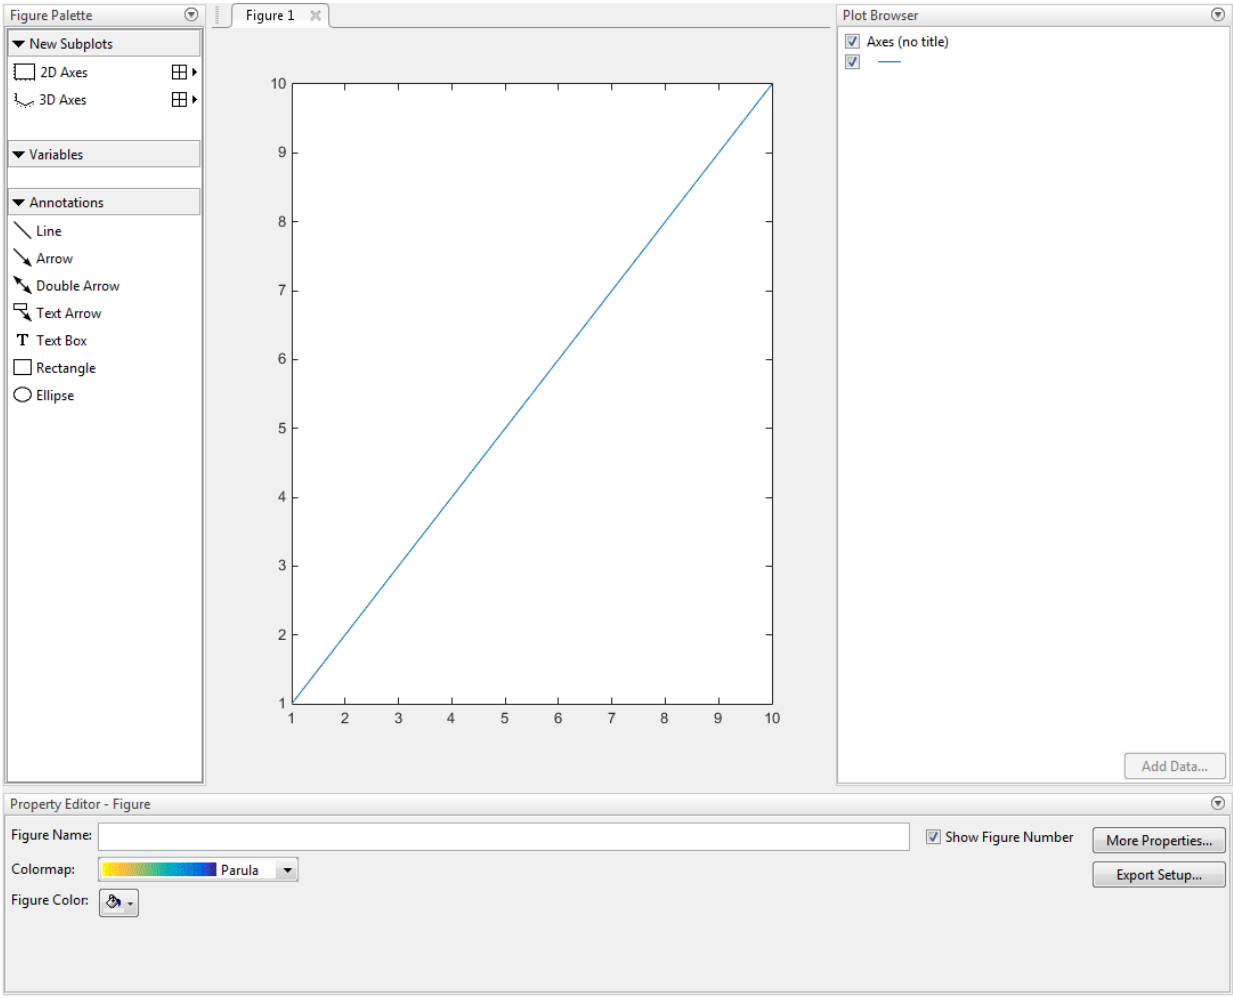

Alternatives

To collectively enable the plot tools, use the larger icon on the figure toolbar. To collectively disable the plot tools, use the smaller icon . Individually select the

Figure Palette, **Plot Browser**, and **Property Editor** tools from the figure's **View** menu. For details, see “Customize Graph Using Plot Tools”.

See Also

`figurepalette` | `plotbrowser` | `propertyeditor`

Introduced before R2006a

plotyy

(Not recommended) Create graph with two y-axes

Compatibility

`plotyy` is not recommended. Use `yyaxis` instead.

Syntax

```
plotyy(X1,Y1,X2,Y2)
plotyy(X1,Y1,X2,Y2,function)
plotyy(X1,Y1,X2,Y2,'function1','function2')
plotyy(AX1,___)
[AX,H1,H2] = plotyy(___)
```

Description

`plotyy(X1,Y1,X2,Y2)` plots `Y1` versus `X1` with *y*-axis labeling on the left and plots `Y2` versus `X2` with *y*-axis labeling on the right.

`plotyy(X1,Y1,X2,Y2,function)` uses the specified plotting function to produce the graph.

`function` can be either a function handle or a character vector specifying `plot`, `semilogx`, `semilogy`, `loglog`, `stem`, or any MATLAB function that accepts the syntax

```
h = function(x,y)
```

For example,

```
plotyy(x1,y1,x2,y2,@loglog) % function handle
plotyy(x1,y1,x2,y2,'loglog') % character vector
```

Function handles enable you to access user-defined local functions and can provide other advantages. For more information on using function handles, see “Create Function Handle”.

`plotyy(X1,Y1,X2,Y2,'function1','function2')` uses `function1(X1,Y1)` to plot the data for the left axis and `function2(X2,Y2)` to plot the data for the right axis.

`plotyy(AX1, ___ )` plots the data using the axes specified by `AX1` for the first set of data, instead of using the current axes. Specify `AX1` as a single axes object or a vector of the two axes objects returned by a previous call to `plotyy`. If you specify a vector, then `plotyy` uses the first axes object in the vector. Use this option with any of the input argument combinations in the previous syntaxes.

`[AX,H1,H2] = plotyy( ___ )` returns the handles of the two axes created in `AX` and the handles of the graphics objects from each plot in `H1` and `H2`. `AX(1)` is the left axes and `AX(2)` is the right axes.

Examples

Plot Two Data Sets with Different y-Axes

Plot two data sets on one graph using two *y*-axes.

```
x = 0:0.01:20;
y1 = 200*exp(-0.05*x).*sin(x);
y2 = 0.8*exp(-0.5*x).*sin(10*x);

figure % new figure
plotyy(x,y1,x,y2)
```

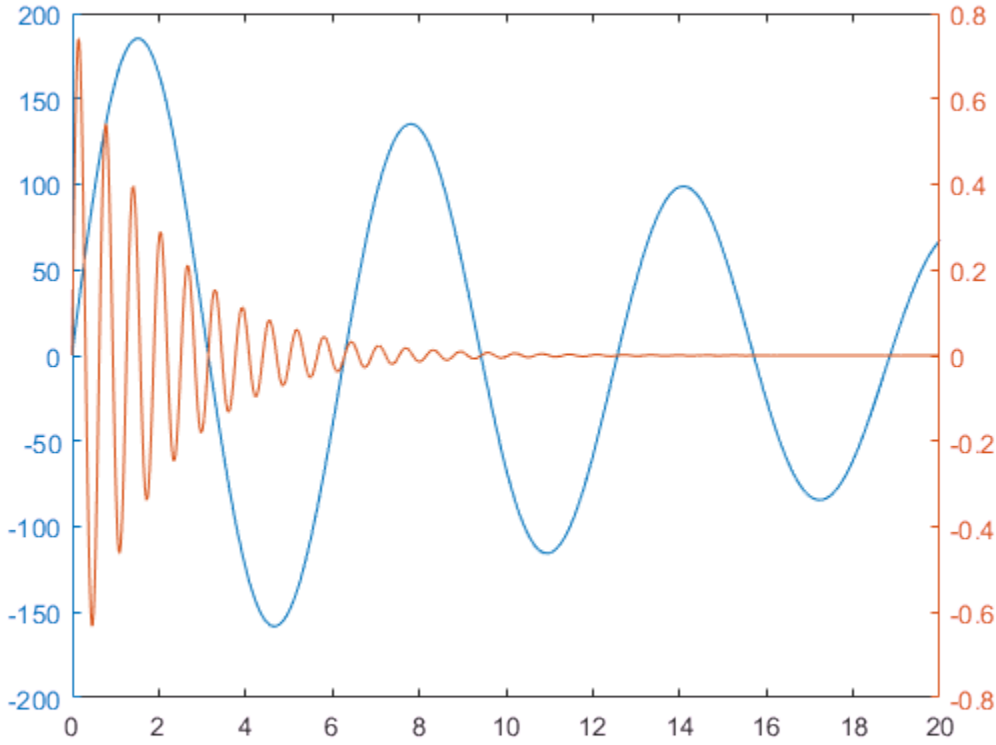

Add Title and Axis Labels

Plot two data sets using a graph with two *y*-axes. Add a title and axis labels.

```
x = 0:0.01:20;
y1 = 200*exp(-0.05*x).*sin(x);
y2 = 0.8*exp(-0.5*x).*sin(10*x);

figure % new figure
[hAx,hLine1,hLine2] = plotyy(x,y1,x,y2);

title('Multiple Decay Rates')
xlabel('Time (\musec)')
```

```
ylabel(hAx(1),'Slow Decay') % left y-axis
ylabel(hAx(2),'Fast Decay') % right y-axis
```

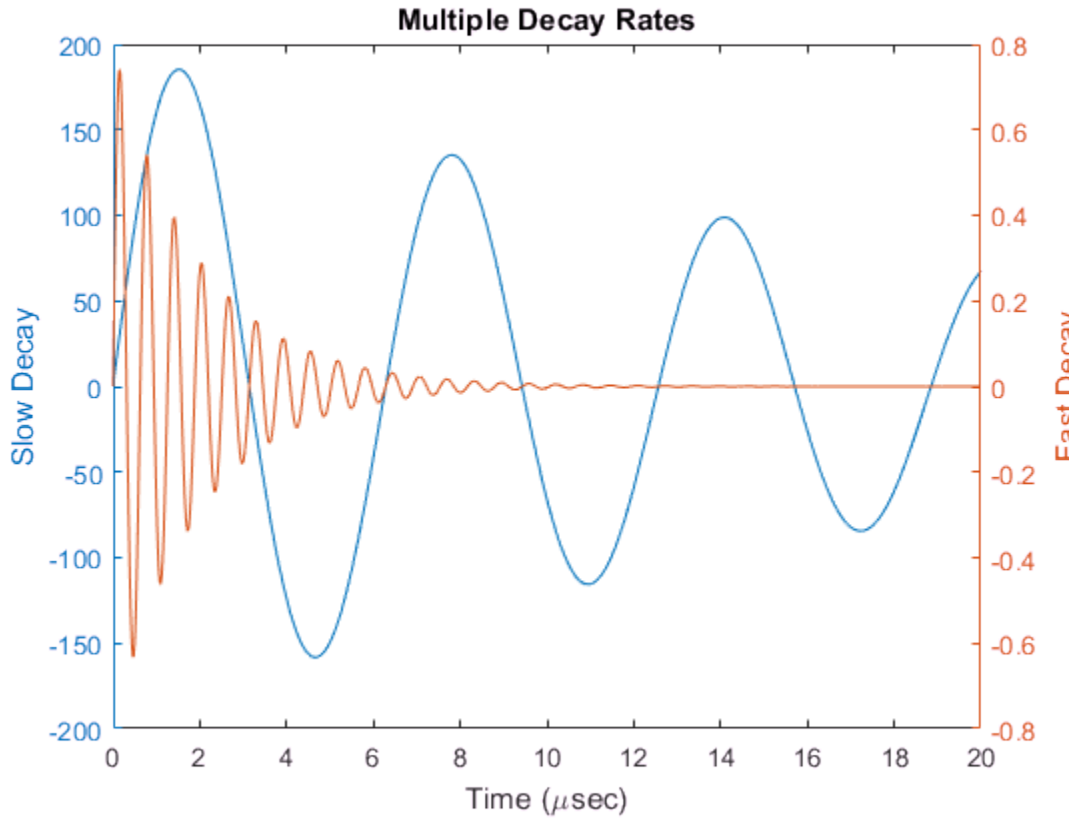

Change Line Styles

Plot two data sets using a graph with two *y*-axes. Change the line styles. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
x = 0:0.01:20;
y1 = 200*exp(-0.05*x).*sin(x);
y2 = 0.8*exp(-0.5*x).*sin(10*x);
```

```
[hAx,hLine1,hLine2] = plotyy(x,y1,x,y2);
hLine1.LineStyle = '--';
hLine2.LineStyle = ':';
```

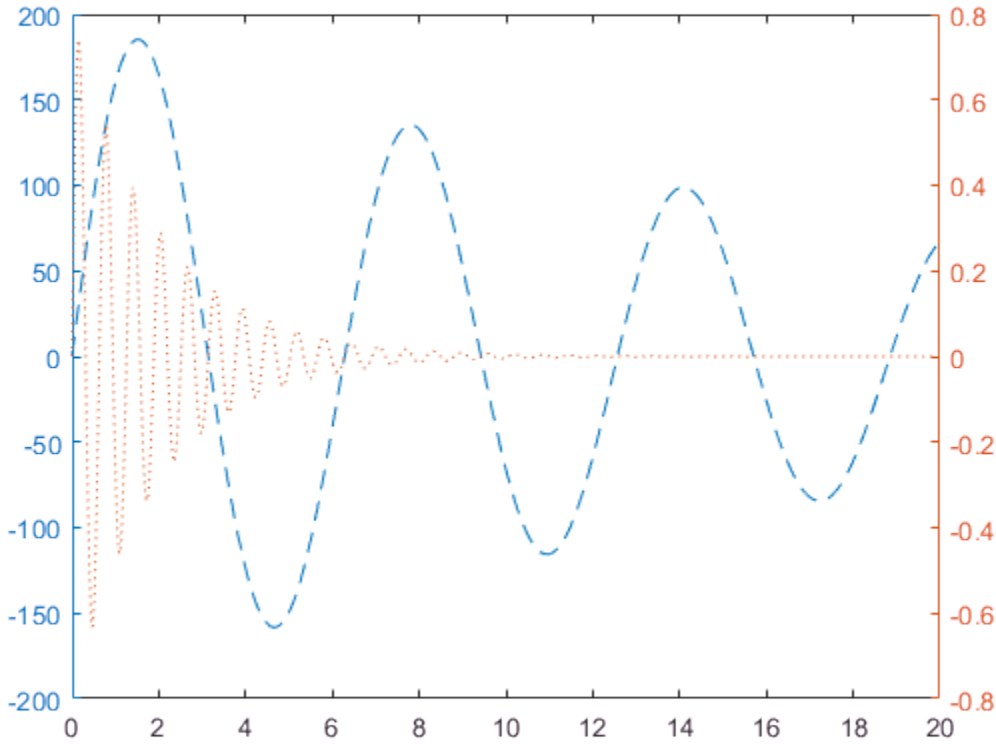

Combine Different Types of Plots

Plot two data sets using a graph with two y-axes. Use a line plot for the data associated with the left *y*-axes. Use a stem plot for the data associated with the right *y*-axes.

```
x = 0:0.1:10;
y1 = 200*exp(-0.05*x).*sin(x);
y2 = 0.8*exp(-0.5*x).*sin(10*x);
```

```
figure
plotyy(x,y1,x,y2,'plot','stem')
```

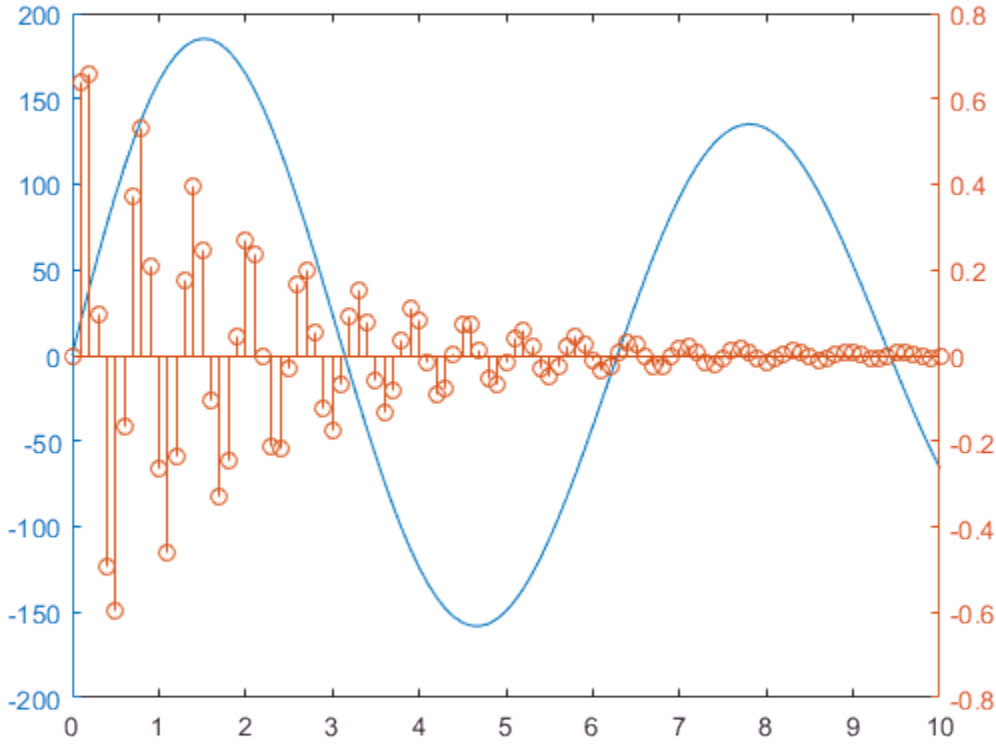

Use Right y-Axis for Two Data Sets

Plot three data sets using a graph with two *y*-axes. Plot one set of data associated with the left *y*-axis. Plot two sets of data associated with the right *y*-axis by using two-column matrices.

```
x = linspace(0,10);
y1 = 200*exp(-0.05*x).*sin(x);
y2 = 0.8*exp(-0.5*x).*sin(10*x);
```

```
y3 = 0.2*exp(-0.5*x).*sin(10*x);

figure
[hAx,hLine1,hLine2] = plotyy(x,y1,[x',x'],[y2',y3']);
```

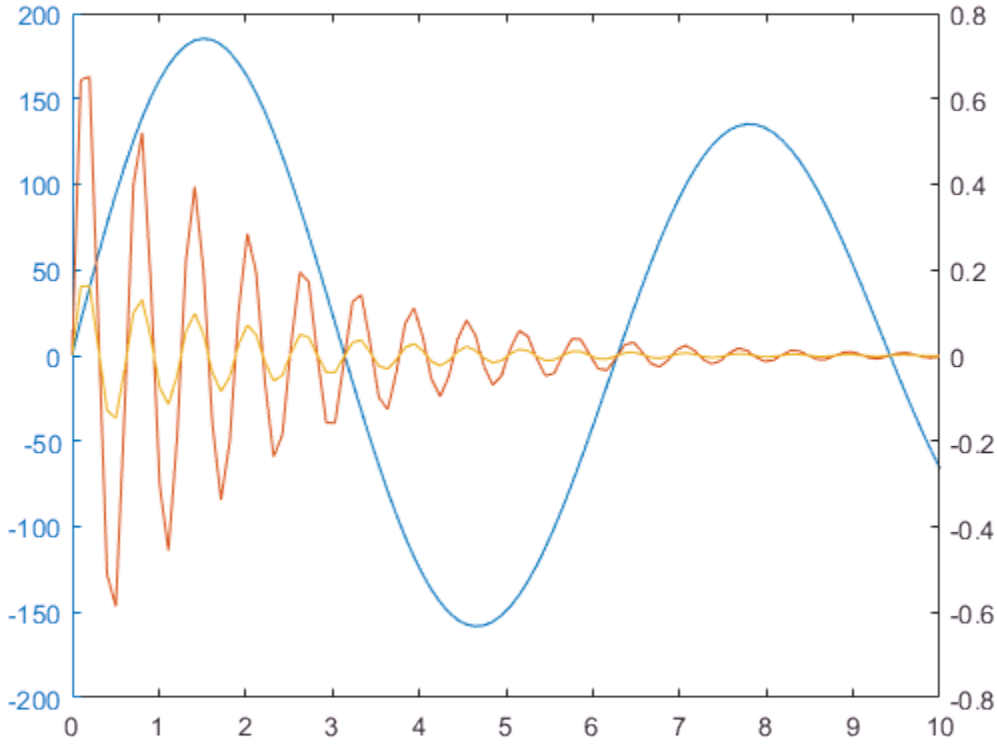

See Also

See Also

Functions

`linkaxes` | `linkprop` | `loglog` | `plot` | `semilogx` | `semilogy` | `yyaxis`

Topics

"Create Chart with Two y-Axes"
"Create Chart with Multiple x-Axes and y-Axes"

Introduced before R2006a

matlab.unittest.plugins

Summary of classes in MATLAB Plugins Interface

Package Contents

Plugins customize a `TestRunner` object. The `matlab.unittest.plugins` package consists of the following customized MATLAB plugins.

Fundamental Plugin Related Interfaces

matlab.unittest.plugins.OutputStream	Interface that determines where to send text output
matlab.unittest.plugins.QualifyingPlugin	Interface for plugins that perform system-wide qualifications
matlab.unittest.plugins.TestRunnerPlugin	Plugin interface for extending TestRunner

Plugin Implementations

Diagnostic & Progress Information

matlab.unittest.plugins.DiagnosticsRecordingPlugin	Plugin to record diagnostics on test results
matlab.unittest.plugins.FailureDiagnosticsPlugin	Plugin to show diagnostics on failure
matlab.unittest.plugins.LoggingPlugin	Plugin to report diagnostic messages
matlab.unittest.plugins.TestRunProgressPlugin	Plugin that reports test run progress

Debugging & Qualification

matlab.unittest.plugins.DiagnosticsValidationPlugin
Plugin to help validate diagnostic code

matlab.unittest.plugins.FailOnWarningsPlugin
Plugin to fail tests that issue warnings

matlab.unittest.plugins.StopOnFailuresPlugin
Plugin to debug test failures

Output Formats & Continuous Integration

matlab.unittest.plugins.TAPPlugin
Plugin that produces Test Anything Protocol stream

matlab.unittest.plugins.XMLPlugin
Plugin that writes test results in XML format

Reporting

matlab.unittest.plugins.CodeCoveragePlugin
Plugin that produces a code coverage report

matlab.unittest.plugins.TestReportPlugin
Plugin that produces a test result report

Output Streams

matlab.unittest.plugins.ToFile
Output stream to write text output to file

matlab.unittest.plugins.ToStandardOutput
Output stream to display text information to screen

Packages

matlab.unittest.plugins.testreport	Summary of classes in MATLAB Plugin Test Report Generation
matlab.unittest.plugins.diagnosticrecord	Summary of classes associated with MATLAB Plugin Diagnostic Records

See Also

Topics

"Add Plugin to Test Runner"
"Write Plugins to Extend TestRunner"
"Create Custom Plugin"
"Write Plugin to Save Diagnostic Details"

matlab.unittest.plugins.CodeCoveragePlugin class

Package: matlab.unittest.plugins

Plugin that produces a code coverage report

Description

To produce a line coverage report for MATLAB source code, add the `CodeCoveragePlugin` to the `TestRunner`. The testing framework runs the tests, and the resulting coverage report indicates the executed lines of code. The coverage report is based on source code located in one or more folders or packages. The source code must be on the MATLAB path and remain on the path during the test run.

The `CodeCoveragePlugin` uses the MATLAB profiler to determine which lines of code the tests execute. The tests and source code should not interact with the profiler. Before running a suite of tests, the plugin clears any data collected by the profiler.

Construction

Instantiate a `CodeCoveragePlugin` using one of its static methods.

To report on source code within one or more folders, use the `forFolder` static method. To report on source code within one or more packages, use the `forPackage` static method.

Methods

forFolder	Construct CodeCoveragePlugin for folders
forPackage	Construct CodeCoveragePlugin for packages

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Generate Code Coverage Report

In a new file, `quadraticSolver.m`, in your working folder, create the following function.

```
function roots = quadraticSolver(a,b,c)
% quadraticSolver returns solutions to the
% quadratic equation a*x^2 + b*x + c = 0.

checkInputs

roots(1) = (-b + sqrt(b^2 - 4*a*c)) / (2*a);
roots(2) = (-b - sqrt(b^2 - 4*a*c)) / (2*a);

    function checkInputs
        if ~isa(a,'numeric') || ~isa(b,'numeric') || ~isa(c,'numeric')
            error('quadraticSolver:InputMustBeNumeric', ...
                'Coefficients must be numeric.')
        end
    end
end
```

Create a test for the quadratic solver. In a `tests` package (a `+tests` subfolder), create `SolverTest.m` containing the following test class.

```
classdef SolverTest < matlab.unittest.TestCase
    % SolverTest tests solutions to the quadratic equation
    % a*x^2 + b*x + c = 0

    methods (Test)
        function testRealSolution(testCase)
            actSolution = quadraticSolver(1,-3,2);
            expSolution = [2,1];
            testCase.verifyEqual(actSolution,expSolution)
        end
        function testImaginarySolution(testCase)
            actSolution = quadraticSolver(1,2,10);
            expSolution = [-1+3i, -1-3i];
            testCase.verifyEqual(actSolution,expSolution)
        end
    end

end
```

At the command prompt from within your original working folder, create a test suite from the `tests` package.

```
import matlab.unittest.TestSuite
import matlab.unittest.TestRunner
import matlab.unittest.plugins.CodeCoveragePlugin

suite = TestSuite.fromPackage('tests');
```

Create a test runner.

```
runner = TestRunner.withTextOutput;
```

Add `CodeCoveragePlugin` to the runner and run the tests. Specify that the source code folder is your current working folder. If you have other source code files in your current working folder, they show up in the coverage report. The folder that contains the source code (`quadraticSolver.m`) must be on your MATLAB path.

```
runner.addPlugin(CodeCoveragePlugin.forFolder(pwd))
result = runner.run(suite);
```

```
Running tests.SolverTest
..
Done tests.SolverTest
__________
```

MATLAB opens a Profiler Coverage Report for the quadratic solver function.

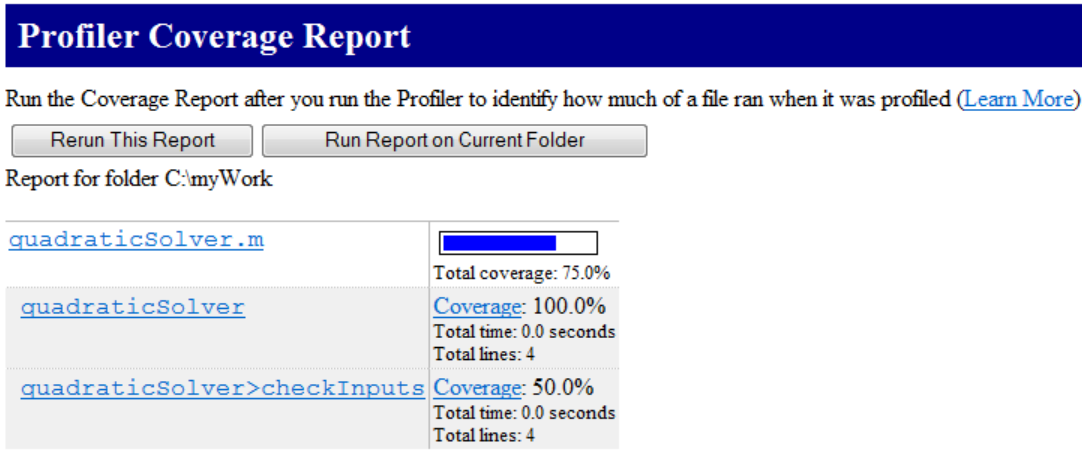

The `checkinputs` nested function does not have complete code coverage. Since the tests in `SolverTest.m` do not pass nonnumeric input to `quadraticSolver`, MATLAB does not exercise the code that throws an error if the inputs are not numeric. To address the missing coverage, add a test method to test the error condition.

See Also

See Also

matlab.unittest.plugins.TestRunnerPlugin | `profile`

Introduced in R2014b

matlab.unittest.plugins.CodeCoveragePlugin.forFolder

Class: matlab.unittest.plugins.CodeCoveragePlugin
Package: matlab.unittest.plugins

Construct CodeCoveragePlugin for folders

Syntax

```
matlab.unittest.plugins.CodeCoveragePlugin.forFolder(folder)
matlab.unittest.plugins.CodeCoveragePlugin.forFolder(
folder,'IncludingSubfolders',tf)
```

Description

`matlab.unittest.plugins.CodeCoveragePlugin.forFolder(folder)` creates a plugin that produces a code coverage report for one or more folders. The plugin reports on the source code inside `folder`.

`matlab.unittest.plugins.CodeCoveragePlugin.forFolder(folder,'IncludingSubfolders',tf)` indicates whether to report on source code inside all subfolders of `folder`. By default, `CodeCoveragePlugin` does not report on source code in subfolders.

Input Arguments

`folder` — Locations of folder containing source code

character vector | cell array of character vectors | string array

Locations of folder containing source code, specified as a character vector, a cell array of character vectors, or a string array. `folder` is the absolute or relative path to one or more folders. If you specify multiple folders, MATLAB opens a profile coverage report for each folder.

The source code folders must be on the MATLAB path and remain on the path during the test run.

Example: `'C:\projects\myproj'`

Example: `pwd`

Example: `{'C:\projects\myprojA','myprojB'}`

`tf` — Indicator to report on subfolders
`false` (default) | `true`

Indicator to report on source code in subfolders, specified as logical `false` or `true`. When this value is `false`, the plugin does not report on subfolders. The default value is `false`.

Examples

Generate Code Coverage Report

In a new file, `quadraticSolver.m`, in your working folder, create the following function.

```
function roots = quadraticSolver(a,b,c)
% quadraticSolver returns solutions to the
% quadratic equation a*x^2 + b*x + c = 0.

checkInputs

roots(1) = (-b + sqrt(b^2 - 4*a*c)) / (2*a);
roots(2) = (-b - sqrt(b^2 - 4*a*c)) / (2*a);

    function checkInputs
        if ~isa(a,'numeric') || ~isa(b,'numeric') || ~isa(c,'numeric')
            error('quadraticSolver:InputMustBeNumeric', ...
                'Coefficients must be numeric.')
        end
    end
end
```

Create a test for the quadratic solver. In a `tests` package (a `+tests` subfolder), create `SolverTest.m` containing the following test class.

```
classdef SolverTest < matlab.unittest.TestCase
    % SolverTest tests solutions to the quadratic equation
    % a*x^2 + b*x + c = 0
```

```
    methods (Test)
        function testRealSolution(testCase)
            actSolution = quadraticSolver(1,-3,2);
            expSolution = [2,1];
            testCase.verifyEqual(actSolution,expSolution)
        end
        function testImaginarySolution(testCase)
            actSolution = quadraticSolver(1,2,10);
            expSolution = [-1+3i, -1-3i];
            testCase.verifyEqual(actSolution,expSolution)
        end
    end

end
```

At the command prompt from within your original working folder, create a test suite from the `tests` package.

```
import matlab.unittest.TestSuite
import matlab.unittest.TestRunner
import matlab.unittest.plugins.CodeCoveragePlugin

suite = TestSuite.fromPackage('tests');
```

Create a test runner.

```
runner = TestRunner.withTextOutput;
```

Add `CodeCoveragePlugin` to the runner and run the tests. Specify that the source code folder is your current working folder. If you have other source code files in your current working folder, they show up in the coverage report. The folder that contains the source code (`quadraticSolver.m`) must be on your MATLAB path.

```
runner.addPlugin(CodeCoveragePlugin.forFolder(pwd))
result = runner.run(suite);
```

```
Running tests.SolverTest
..
Done tests.SolverTest
__________
```

MATLAB opens a Profiler Coverage Report for the quadratic solver function.

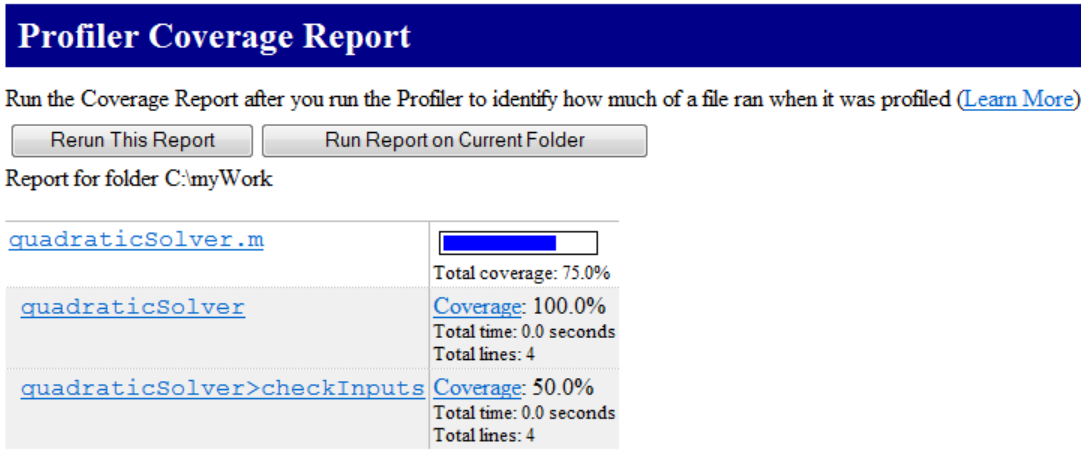

The `checkinputs` nested function does not have complete code coverage. Since the tests in `SolverTest.m` do not pass nonnumeric input to `quadraticSolver`, MATLAB does not exercise the code that throws an error if the inputs are not numeric. To address the missing coverage, add a test method to test the error condition.

See Also

See Also

matlab.unittest.plugins.CodeCoveragePlugin.forPackage

Introduced in R2014b

matlab.unittest.plugins.CodeCoveragePlugin.forPackage

Class: matlab.unittest.plugins.CodeCoveragePlugin
Package: matlab.unittest.plugins

Construct CodeCoveragePlugin for packages

Syntax

```
matlab.unittest.plugins.CodeCoveragePlugin.forPackage(package)
matlab.unittest.plugins.CodeCoveragePlugin.forPackage(
package,'IncludingSubpackages',tf)
```

Description

`matlab.unittest.plugins.CodeCoveragePlugin.forPackage(package)` creates a plugin that produces a code coverage report for one or more packages. The plugin reports on the source code inside `package`.

`matlab.unittest.plugins.CodeCoveragePlugin.forPackage(package,'IncludingSubpackages',tf)` indicates whether to report on source code inside all subpackages of `package`. By default, `CodeCoveragePlugin` does not report on source code in subpackages.

Input Arguments

`package` — Names of package containing source code

character vector | cell array of character vectors | string array

Names of package containing source code, specified as a character vector, a cell array of character vectors, or a string array. If you specify multiple packages, MATLAB opens a profile coverage report for each package.

The parent folder of the top-level source code package must be on the MATLAB path and remain on the path during the test run.

Example: `'myproject.controller'`

Example: `{'myprojA','myprojB'}`

`tf` — Indicator to report on subpackages
`false` (default) | `true`

Indicator to report on source code in subpackages, specified as logical `false` or `true`. When this value is `false`, the plugin does not report on subpackages. The default value is `false`.

See Also

See Also

matlab.unittest.plugins.CodeCoveragePlugin.forFolder

Introduced in R2014b

matlab.unittest.plugins.DiagnosticsRecordingPlugin class

Package: matlab.unittest.plugins

Plugin to record diagnostics on test results

Description

The `DiagnosticsRecordingPlugin` enables programmatic access to the diagnostic information from unit tests.

This class creates a plugin to record diagnostics on test results. The `TestRunner` records these diagnostics as `DiagnosticRecord` arrays in the `Details` property of the `TestResult` object. Each element of the `DiagnosticRecord` array corresponds to an event in an individual test.

If you run tests with the `runtests` function or the `run` method of `TestSuite` or `TestCase`, the test framework uses this plugin by default. Also, if you run performance tests with the `runperf` function or the `run` method of `TimeExperiment`, the test framework uses this plugin by default.

Construction

`matlab.unittest.plugins.DiagnosticsRecordingPlugin` creates a plugin to record diagnostics on test results. By default, the `DiagnosticsRecordingPlugin` records qualification failures and logged events.

`matlab.unittest.plugins.DiagnosticsRecordingPlugin(Name,Value)` creates a plugin with additional options specified by one or more `Name,Value` pair arguments. `Name` must appear inside single quotes (`''`). You can specify several name-value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example:
`matlab.unittest.plugins.DiagnosticsRecordingPlugin('IncludingPassingDiagnostic`
creates a plugin that records passing diagnostics in addition to diagnostics for failing qualifications and logged events.

`'IncludingPassingDiagnostics'` — Indicator to record diagnostics from passing tests
`false` (default) | `true`

Whether to record diagnostics from passing tests, specified as `false` or `true`. By default the plugin does not record diagnostics from passing tests.

Data Types: `logical`

`'Verbosity'` — Verbosity levels recorded by plugin instance
1 (default) | 2 | 3 | 4 | `matlab.unittest.Verbosity` enumeration

Verbosity levels recorded by the plugin instance, specified as an integer value from 1 through 4, or as a `matlab.unittest.Verbosity` enumeration object. The plugin records diagnostics that are logged at this level and below. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration. By default the plugin records diagnostics logged at the `matlab.unittest.Verbosity.Terse` level.

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
1	`matlab.unittest.Verbosity.T`	Minimal information
2	`matlab.unittest.Verbosity.C`	Moderate amount of information
3	`matlab.unittest.Verbosity.D`	Some supplemental information
4	`matlab.unittest.Verbosity.V`	Lots of supplemental information

`'ExcludingLoggedDiagnostics'` — Indicator to exclude diagnostics from logged events
`false` (default) | `true`

Whether to exclude diagnostics from logged events, specified as `false` or `true`. By default the plugin does not record diagnostics from logged events.

Data Types: `logical`

Properties

`IncludePassingDiagnostics` — Indicator if diagnostics for passing events are recorded
`false` (default) | `true`

Indicator if diagnostics for passing events are recorded, returned as `false` or `true`. This property is `false` by default. You can specify it as `true` during construction.

Data Types: `logical`

`Verbosity` — Verbosity levels recorded by the plugin instance
`matlab.unittest.Verbosity` enumeration

Verbosity levels recorded by the plugin instance, returned as a `matlab.unittest.Verbosity` enumeration object. The plugin records diagnostics that are logged at this level and lower. This property is `matlab.unittest.Verbosity.Terse` by default. You can specify a different verbosity level during construction.

`ExcludeLoggedDiagnostics` — Whether to exclude diagnostics from logged events
`false` (default) | `true`

Whether to exclude diagnostics from logged events from the report, specified as `false` or `true` (`logical` 0 or 1). This property is read only. You can specify it as `true` during plugin construction.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Record Diagnostics on Test Result

In your working folder, create a file, `ExampleTest.m`, containing the following test class. The intent of this test is to illustrate how to use the `DiagnosticsRecordingPlugin` plugin, and it is not intended to be a representative unit test.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods (Test)
        function testA(testCase)
            testCase.log(1,'Terse log message')  % logs
            testCase.log(3,'Detailed log message')  % logs
            testCase.verifyEqual(3+2,5)             % passes
            testCase.assumeTrue(true)               % passes
            testCase.verifyGreaterThan(5, 9)        % fails
            testCase.assertEqual(3.14,pi)           % fails/incomplete
        end
        function testB(testCase)
            % This test contains an intentional error - passing a character
            % instead of a variable to the ones function.
            a = [1 2];
            testCase.verifyEqual(ones('a'),[1 1]);  % errors
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class.

```
suite   = testsuite('ExampleTest');
```

Create a test runner with no plugins. This code creates a silent runner and provides you with complete control over the installed plugins. Add a `DiagnosticsRecordingPlugin` to the test runner.

```
import matlab.unittest.TestRunner;
import matlab.unittest.plugins.DiagnosticsRecordingPlugin;

runner = TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin);
```

Run the tests.

```
results = runner.run(suite);
```

Display the result from the second test. The test fails and is incomplete.

```
results(2)
```

```
ans = 

  TestResult with properties:

          Name: 'ExampleTest/testB'
        Passed: 0
        Failed: 1
    Incomplete: 1
      Duration: 7.8912e-04
       Details: [1×1 struct]

Totals:
   0 Passed, 1 Failed, 1 Incomplete.
   0.00078912 seconds testing time.
```

Index into the diagnostic record to display more information.

```
results(2).Details.DiagnosticRecord
```

```
ans = 

  ExceptionDiagnosticRecord with properties:

            Event: 'ExceptionThrown'
       EventScope: TestMethod
    EventLocation: 'ExampleTest/testB'
        Exception: [1×1 MException]
            Stack: [1×1 struct]
           Report: '=================================================================
```

The test throws an uncaught exception.

Collect the diagnostic records for the first test, `testA`.

```
testA_records = results(1).Details.DiagnosticRecord
```

```
testA_records = 

  1×3 heterogeneous DiagnosticRecord (LoggedDiagnosticRecord, QualificationDiagnosticRe

    Event
    EventScope
```

```
    EventLocation
    Stack
    Report
```

View the events that the plugin recorded for `testA`.

```
{testA_records.Event}'
```

```
ans =

  3×1 cell array

    'DiagnosticLogged'
    'VerificationFailed'
    'AssertionFailed'
```

The plugin records the message logged at a `Terse` level of verbosity, and the verification and assertion failures.

Create a plugin that records messages at all verbosity levels and includes passing diagnostics. Rerun the tests and collect the diagnostic records for `testA`.

```
runner = TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin(...
    'IncludingPassingDiagnostics',true,'Verbosity',4));
results = runner.run(suite);
testA_records = results(1).Details.DiagnosticRecord;
```

View the events that the plugin recorded for `testA`.

```
{testA_records.Event}'
```

```
ans =

  6×1 cell array

    'DiagnosticLogged'
    'DiagnosticLogged'
    'VerificationPassed'
    'AssumptionPassed'
    'VerificationFailed'
    'AssertionFailed'
```

The plugin records diagnostic information for all the qualifications and calls to the `log` method.

Select all the records with failing event diagnostics.

```
failedRecords = selectFailed(testA_records)
```

```
failedRecords = 

  1×2 QualificationDiagnosticRecord array with properties:

    Event
    EventScope
    EventLocation
    TestDiagnosticResults
    FrameworkDiagnosticResults
    Stack
    Report
```

Select all the records with passing event diagnostics and display the report for the first record.

```
passedRecords = selectPassed(testA_records);
passedRecords(1).Report
```

```
ans = 

'==============================================================================
Verification passed in ExampleTest/testA.

    ----------------------
    Framework Diagnostic:
    ----------------------
    verifyEqual passed.
    --> The values are equal using "isequaln".

    Actual double:
             5
    Expected double:
             5

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testA) at 6
==============================================================================='
```

Select all the records for incomplete events.

```
incompleteRecords = selectIncomplete(testA_records)
```

```
incompleteRecords = 

  QualificationDiagnosticRecord with properties:

                        Event: 'AssertionFailed'
                   EventScope: TestMethod
                EventLocation: 'ExampleTest/testA'
         TestDiagnosticResults: [1×0 matlab.unittest.diagnostics.DiagnosticResult]
    FrameworkDiagnosticResults: [1×1 matlab.unittest.diagnostics.DiagnosticResult]
                        Stack: [1×1 struct]
                       Report: '=====================================================
```

Since this event is an assertion failure, the framework also returns this record with the failing diagnostics as `failedRecords(2)`.

Select all the records with logged events and display the logged messages.

```
loggedRecords = selectLogged(testA_records);
{loggedRecords.Report}'
```

```
ans = 

  2×1 cell array

    '   [Terse] Diagnostic logged (2016-12-12T12:28:07): Terse log message'
    '[Detailed] Diagnostic logged (2016-12-12T12:28:07): Detailed log message'
```

- “Programmatically Access Test Diagnostics”

See Also

See Also

matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord | matlab.unittest.plugins.FailureDiagnosticsPlugin | matlab.unittest.plugins.LoggingPlugin | `matlab.unittest.plugins` | `matlab.unittest.plugins.diagnosticrecord`

Topics

“Programmatically Access Test Diagnostics”

Introduced in R2016a

selectFailed

Class: matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord
Package: matlab.unittest.plugins.diagnosticrecord

Return diagnostic records for failed events

Syntax

```
selectedRecords = selectFailed(records)
```

Description

`selectedRecords = selectFailed(records)` returns the diagnostic records for failed events as an array of `matlab.unittest.plugins.diagnosticrecord.QualificationDiagnosticRecord` and `matlab.unittest.plugins.diagnosticrecord.ExceptionDiagnosticRecord` instances.

Failed events are events that result in a failure on the `TestResult`. These events include verification failures, assertion failures, and uncaught `MException` objects.

Input Arguments

`records` — Recorded diagnostics on test result

array of `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord` instances

Recorded diagnostics on a test result, specified as an array of `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord` instances. Access recorded diagnostics via the `DiagnosticRecord` field in the `Details` property on `TestResult`. For example, if your test results are stored in the variable `results`, find the recorded diagnostics for the second test by invoking `records = result(2).Details.DiagnosticRecord`.

Examples

Select Diagnostics on Test Result

In your working folder, create a file, `ExampleTest.m`, containing the following test class. The intent of this test is to illustrate how to use the `DiagnosticsRecordingPlugin` plugin, and it is not intended to be a representative unit test.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods (Test)
        function testA(testCase)
            testCase.log(1,'Terse log message')  % logs
            testCase.log(3,'Detailed log message')  % logs
            testCase.verifyEqual(3+2,5)             % passes
            testCase.assumeTrue(true)               % passes
            testCase.verifyGreaterThan(5, 9)        % fails
            testCase.assertEqual(3.14,pi)           % fails/incomplete
        end
        function testB(testCase)
            % This test contains an intentional error - passing a character
            % instead of a variable to the ones function.
            a = [1 2];
            testCase.verifyEqual(ones('a'),[1 1]);  % errors
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class.

```
suite   = testsuite('ExampleTest');
```

Create a test runner with no plugins. This code creates a silent runner and provides you with complete control over the installed plugins. Add a `DiagnosticsRecordingPlugin` to the test runner.

```
import matlab.unittest.TestRunner;
import matlab.unittest.plugins.DiagnosticsRecordingPlugin;

runner = TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin);
```

Run the tests.

```
results = runner.run(suite);
```

Display the result from the second test. The test fails and is incomplete.

```
results(2)
```

```
ans = 

  TestResult with properties:

          Name: 'ExampleTest/testB'
        Passed: 0
        Failed: 1
    Incomplete: 1
      Duration: 7.8912e-04
       Details: [1×1 struct]

Totals:
   0 Passed, 1 Failed, 1 Incomplete.
   0.00078912 seconds testing time.
```

Index into the diagnostic record to display more information.

```
results(2).Details.DiagnosticRecord
```

```
ans = 

  ExceptionDiagnosticRecord with properties:

            Event: 'ExceptionThrown'
       EventScope: TestMethod
    EventLocation: 'ExampleTest/testB'
        Exception: [1×1 MException]
            Stack: [1×1 struct]
           Report: '=================================================================
```

The test throws an uncaught exception.

Collect the diagnostic records for the first test, `testA`.

```
testA_records = results(1).Details.DiagnosticRecord
```

```
testA_records = 

  1×3 heterogeneous DiagnosticRecord (LoggedDiagnosticRecord, QualificationDiagnosticRe
```

```
    Event
    EventScope
    EventLocation
    Stack
    Report
```

View the events that the plugin recorded for `testA`.

```
{testA_records.Event}'
```

```
ans =

  3×1 cell array

    'DiagnosticLogged'
    'VerificationFailed'
    'AssertionFailed'
```

The plugin records the message logged at a `Terse` level of verbosity, and the verification and assertion failures.

Create a plugin that records messages at all verbosity levels and includes passing diagnostics. Rerun the tests and collect the diagnostic records for `testA`.

```
runner = TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin(...
    'IncludingPassingDiagnostics',true,'Verbosity',4));
results = runner.run(suite);
testA_records = results(1).Details.DiagnosticRecord;
```

View the events that the plugin recorded for `testA`.

```
{testA_records.Event}'
```

```
ans =

  6×1 cell array

    'DiagnosticLogged'
    'DiagnosticLogged'
    'VerificationPassed'
    'AssumptionPassed'
    'VerificationFailed'
    'AssertionFailed'
```

The plugin records diagnostic information for all the qualifications and calls to the `log` method.

Select all the records with failing event diagnostics.

```
failedRecords = selectFailed(testA_records)
```

```
failedRecords =

  1×2 QualificationDiagnosticRecord array with properties:

    Event
    EventScope
    EventLocation
    TestDiagnosticResults
    FrameworkDiagnosticResults
    Stack
    Report
```

Select all the records with passing event diagnostics and display the report for the first record.

```
passedRecords = selectPassed(testA_records);
passedRecords(1).Report
```

```
ans =

'==============================================================================
Verification passed in ExampleTest/testA.

    ----------------------
    Framework Diagnostic:
    ----------------------
    verifyEqual passed.
    --> The values are equal using "isequaln".

    Actual double:
             5
    Expected double:
             5

    ------------------
    Stack Information:
    ------------------
```

```
    In C:\work\ExampleTest.m (ExampleTest.testA) at 6
================================================================================'
```

Select all the records for incomplete events.

```
incompleteRecords = selectIncomplete(testA_records)
```

```
incompleteRecords =

  QualificationDiagnosticRecord with properties:

                        Event: 'AssertionFailed'
                   EventScope: TestMethod
                EventLocation: 'ExampleTest/testA'
         TestDiagnosticResults: [1×0 matlab.unittest.diagnostics.DiagnosticResult]
    FrameworkDiagnosticResults: [1×1 matlab.unittest.diagnostics.DiagnosticResult]
                        Stack: [1×1 struct]
                       Report: '=====================================================
```

Since this event is an assertion failure, the framework also returns this record with the failing diagnostics as `failedRecords(2)`.

Select all the records with logged events and display the logged messages.

```
loggedRecords = selectLogged(testA_records);
{loggedRecords.Report}'
```

```
ans =

  2×1 cell array

    '   [Terse] Diagnostic logged (2016-12-12T12:28:07): Terse log message'
    '[Detailed] Diagnostic logged (2016-12-12T12:28:07): Detailed log message'
```

- “Programmatically Access Test Diagnostics”

See Also

See Also

matlab.unittest.plugins.DiagnosticsRecordingPlugin |
matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord |
matlab.unittest.plugins.diagnosticrecord.QualificationDiagnosticRecord |

matlab.unittest.plugins.diagnosticrecord.ExceptionDiagnosticRecord | selectIncomplete | selectLogged | selectPassed

Topics

"Programmatically Access Test Diagnostics"

Introduced in R2016a

selectIncomplete

Class: matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord
Package: matlab.unittest.plugins.diagnosticrecord

Return diagnostic records for incomplete events

Syntax

```
selectedRecords = selectIncomplete(records)
```

Description

`selectedRecords = selectIncomplete(records)` returns the diagnostic records for incomplete events as an array of `matlab.unittest.plugins.diagnosticrecord.QualificationDiagnosticRecord` and `matlab.unittest.plugins.diagnosticrecord.ExceptionDiagnosticRecord` instances.

Incomplete events are events that result in a incomplete test on the `TestResult`. These events include assumption failures, assertion failures, and uncaught `MException` objects.

Input Arguments

`records` — Recorded diagnostics on test result
array of `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord` instances

Recorded diagnostics on a test result, specified as an array of `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord` instances. Access recorded diagnostics via the `DiagnosticRecord` field in the `Details` property on `TestResult`. For example, if your test results are stored in the variable `results`, find the recorded diagnostics for the second test by invoking `records = result(2).Details.DiagnosticRecord`.

Examples

Select Diagnostics on Test Result

In your working folder, create a file, `ExampleTest.m`, containing the following test class. The intent of this test is to illustrate how to use the `DiagnosticsRecordingPlugin` plugin, and it is not intended to be a representative unit test.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods (Test)
        function testA(testCase)
            testCase.log(1,'Terse log message')  % logs
            testCase.log(3,'Detailed log message')  % logs
            testCase.verifyEqual(3+2,5)             % passes
            testCase.assumeTrue(true)               % passes
            testCase.verifyGreaterThan(5, 9)        % fails
            testCase.assertEqual(3.14,pi)           % fails/incomplete
        end
        function testB(testCase)
            % This test contains an intentional error - passing a character
            % instead of a variable to the ones function.
            a = [1 2];
            testCase.verifyEqual(ones('a'),[1 1]);  % errors
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class.

```
suite   = testsuite('ExampleTest');
```

Create a test runner with no plugins. This code creates a silent runner and provides you with complete control over the installed plugins. Add a `DiagnosticsRecordingPlugin` to the test runner.

```
import matlab.unittest.TestRunner;
import matlab.unittest.plugins.DiagnosticsRecordingPlugin;

runner = TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin);
```

Run the tests.

```
results = runner.run(suite);
```

Display the result from the second test. The test fails and is incomplete.

```
results(2)
```

```
ans =

  TestResult with properties:

          Name: 'ExampleTest/testB'
        Passed: 0
        Failed: 1
    Incomplete: 1
      Duration: 7.8912e-04
       Details: [1×1 struct]

Totals:
   0 Passed, 1 Failed, 1 Incomplete.
   0.00078912 seconds testing time.
```

Index into the diagnostic record to display more information.

```
results(2).Details.DiagnosticRecord
```

```
ans =

  ExceptionDiagnosticRecord with properties:

            Event: 'ExceptionThrown'
       EventScope: TestMethod
    EventLocation: 'ExampleTest/testB'
        Exception: [1×1 MException]
            Stack: [1×1 struct]
           Report: '=================================================================
```

The test throws an uncaught exception.

Collect the diagnostic records for the first test, `testA`.

```
testA_records = results(1).Details.DiagnosticRecord
```

```
testA_records =

  1×3 heterogeneous DiagnosticRecord (LoggedDiagnosticRecord, QualificationDiagnosticRe
```

```
    Event
    EventScope
    EventLocation
    Stack
    Report
```

View the events that the plugin recorded for `testA`.

```
{testA_records.Event}'
```

```
ans =

  3×1 cell array

    'DiagnosticLogged'
    'VerificationFailed'
    'AssertionFailed'
```

The plugin records the message logged at a `Terse` level of verbosity, and the verification and assertion failures.

Create a plugin that records messages at all verbosity levels and includes passing diagnostics. Rerun the tests and collect the diagnostic records for `testA`.

```
runner = TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin(...
    'IncludingPassingDiagnostics',true,'Verbosity',4));
results = runner.run(suite);
testA_records = results(1).Details.DiagnosticRecord;
```

View the events that the plugin recorded for `testA`.

```
{testA_records.Event}'
```

```
ans =

  6×1 cell array

    'DiagnosticLogged'
    'DiagnosticLogged'
    'VerificationPassed'
    'AssumptionPassed'
    'VerificationFailed'
    'AssertionFailed'
```

The plugin records diagnostic information for all the qualifications and calls to the `log` method.

Select all the records with failing event diagnostics.

```
failedRecords = selectFailed(testA_records)
```

```
failedRecords =

  1×2 QualificationDiagnosticRecord array with properties:

    Event
    EventScope
    EventLocation
    TestDiagnosticResults
    FrameworkDiagnosticResults
    Stack
    Report
```

Select all the records with passing event diagnostics and display the report for the first record.

```
passedRecords = selectPassed(testA_records);
passedRecords(1).Report
```

```
ans =

'==============================================================================
Verification passed in ExampleTest/testA.

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual passed.
    --> The values are equal using "isequaln".

    Actual double:
             5
    Expected double:
             5

    ------------------
    Stack Information:
    ------------------
```

```
    In C:\work\ExampleTest.m (ExampleTest.testA) at 6
================================================================================'
```

Select all the records for incomplete events.

```
incompleteRecords = selectIncomplete(testA_records)
```

```
incompleteRecords =

  QualificationDiagnosticRecord with properties:

                        Event: 'AssertionFailed'
                   EventScope: TestMethod
                EventLocation: 'ExampleTest/testA'
         TestDiagnosticResults: [1×0 matlab.unittest.diagnostics.DiagnosticResult]
    FrameworkDiagnosticResults: [1×1 matlab.unittest.diagnostics.DiagnosticResult]
                        Stack: [1×1 struct]
                       Report: '=====================================================
```

Since this event is an assertion failure, the framework also returns this record with the failing diagnostics as `failedRecords(2)`.

Select all the records with logged events and display the logged messages.

```
loggedRecords = selectLogged(testA_records);
{loggedRecords.Report}'
```

```
ans =

  2×1 cell array

    '   [Terse] Diagnostic logged (2016-12-12T12:28:07): Terse log message'
    '[Detailed] Diagnostic logged (2016-12-12T12:28:07): Detailed log message'
```

- “Programmatically Access Test Diagnostics”

See Also

See Also

matlab.unittest.plugins.DiagnosticsRecordingPlugin |
matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord |
matlab.unittest.plugins.diagnosticrecord.ExceptionDiagnosticRecord |

matlab.unittest.plugins.diagnosticrecord.QualificationDiagnosticRecord | selectFailed | selectLogged | selectPassed

Topics

"Programmatically Access Test Diagnostics"

Introduced in R2016a

selectLogged

Class: matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord
Package: matlab.unittest.plugins.diagnosticrecord

Return diagnostic records for logged events

Syntax

```
selectedRecords = selectLogged(records)
```

Description

`selectedRecords = selectLogged(records)` returns the diagnostic records for logged events as an array of `matlab.unittest.plugins.diagnosticrecord.LoggedDiagnosticRecord` instances. Logged events are calls to the `log` method within the test.

Input Arguments

`records` — Recorded diagnostics on test result

array of `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord` instances

Recorded diagnostics on a test result, specified as an array of `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord` instances. Access recorded diagnostics via the `DiagnosticRecord` field in the `Details` property on `TestResult`. For example, if your test results are stored in the variable `results`, find the recorded diagnostics for the second test by invoking `records = result(2).Details.DiagnosticRecord`.

Examples

Select Diagnostics on Test Result

In your working folder, create a file, `ExampleTest.m`, containing the following test class. The intent of this test is to illustrate how to use the `DiagnosticsRecordingPlugin` plugin, and it is not intended to be a representative unit test.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods (Test)
        function testA(testCase)
            testCase.log(1,'Terse log message')  % logs
            testCase.log(3,'Detailed log message')  % logs
            testCase.verifyEqual(3+2,5)             % passes
            testCase.assumeTrue(true)               % passes
            testCase.verifyGreaterThan(5, 9)        % fails
            testCase.assertEqual(3.14,pi)           % fails/incomplete
        end
        function testB(testCase)
            % This test contains an intentional error - passing a character
            % instead of a variable to the ones function.
            a = [1 2];
            testCase.verifyEqual(ones('a'),[1 1]);  % errors
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class.

```
suite   = testsuite('ExampleTest');
```

Create a test runner with no plugins. This code creates a silent runner and provides you with complete control over the installed plugins. Add a `DiagnosticsRecordingPlugin` to the test runner.

```
import matlab.unittest.TestRunner;
import matlab.unittest.plugins.DiagnosticsRecordingPlugin;

runner = TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin);
```

Run the tests.

```
results = runner.run(suite);
```

Display the result from the second test. The test fails and is incomplete.

```
results(2)
```

```
ans = 

  TestResult with properties:

          Name: 'ExampleTest/testB'
        Passed: 0
        Failed: 1
    Incomplete: 1
      Duration: 7.8912e-04
       Details: [1×1 struct]

Totals:
   0 Passed, 1 Failed, 1 Incomplete.
   0.00078912 seconds testing time.
```

Index into the diagnostic record to display more information.

```
results(2).Details.DiagnosticRecord
```

```
ans = 

  ExceptionDiagnosticRecord with properties:

            Event: 'ExceptionThrown'
       EventScope: TestMethod
    EventLocation: 'ExampleTest/testB'
        Exception: [1×1 MException]
            Stack: [1×1 struct]
           Report: '================================================================
```

The test throws an uncaught exception.

Collect the diagnostic records for the first test, `testA`.

```
testA_records = results(1).Details.DiagnosticRecord
```

```
testA_records = 

  1×3 heterogeneous DiagnosticRecord (LoggedDiagnosticRecord, QualificationDiagnosticRe

    Event
    EventScope
```

```
    EventLocation
    Stack
    Report
```

View the events that the plugin recorded for `testA`.

```
{testA_records.Event}'
```

```
ans =

  3×1 cell array

    'DiagnosticLogged'
    'VerificationFailed'
    'AssertionFailed'
```

The plugin records the message logged at a `Terse` level of verbosity, and the verification and assertion failures.

Create a plugin that records messages at all verbosity levels and includes passing diagnostics. Rerun the tests and collect the diagnostic records for `testA`.

```
runner = TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin(...
    'IncludingPassingDiagnostics',true,'Verbosity',4));
results = runner.run(suite);
testA_records = results(1).Details.DiagnosticRecord;
```

View the events that the plugin recorded for `testA`.

```
{testA_records.Event}'
```

```
ans =

  6×1 cell array

    'DiagnosticLogged'
    'DiagnosticLogged'
    'VerificationPassed'
    'AssumptionPassed'
    'VerificationFailed'
    'AssertionFailed'
```

The plugin records diagnostic information for all the qualifications and calls to the `log` method.

Select all the records with failing event diagnostics.

```
failedRecords = selectFailed(testA_records)
```

```
failedRecords = 

  1×2 QualificationDiagnosticRecord array with properties:

    Event
    EventScope
    EventLocation
    TestDiagnosticResults
    FrameworkDiagnosticResults
    Stack
    Report
```

Select all the records with passing event diagnostics and display the report for the first record.

```
passedRecords = selectPassed(testA_records);
passedRecords(1).Report
```

```
ans = 

'==============================================================================
Verification passed in ExampleTest/testA.

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual passed.
    --> The values are equal using "isequaln".

    Actual double:
             5
    Expected double:
             5

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testA) at 6
==============================================================================' 
```

Select all the records for incomplete events.

```
incompleteRecords = selectIncomplete(testA_records)
```

```
incompleteRecords =

  QualificationDiagnosticRecord with properties:

                        Event: 'AssertionFailed'
                   EventScope: TestMethod
                EventLocation: 'ExampleTest/testA'
         TestDiagnosticResults: [1×0 matlab.unittest.diagnostics.DiagnosticResult]
    FrameworkDiagnosticResults: [1×1 matlab.unittest.diagnostics.DiagnosticResult]
                        Stack: [1×1 struct]
                       Report: '=====================================================
```

Since this event is an assertion failure, the framework also returns this record with the failing diagnostics as `failedRecords(2)`.

Select all the records with logged events and display the logged messages.

```
loggedRecords = selectLogged(testA_records);
{loggedRecords.Report}'
```

```
ans =

  2×1 cell array

    '   [Terse] Diagnostic logged (2016-12-12T12:28:07): Terse log message'
    '[Detailed] Diagnostic logged (2016-12-12T12:28:07): Detailed log message'
```

- “Programmatically Access Test Diagnostics”

See Also

See Also

matlab.unittest.plugins.DiagnosticsRecordingPlugin | matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord | matlab.unittest.plugins.diagnosticrecord.LoggedDiagnosticRecord | selectFailed | selectIncomplete | selectPassed

Topics

“Programmatically Access Test Diagnostics”

Introduced in R2016a

selectPassed

Class: matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord
Package: matlab.unittest.plugins.diagnosticrecord

Return diagnostic records for passed events

Syntax

```
selectedRecords = selectPassed(records)
```

Description

`selectedRecords = selectPassed(records)` returns the diagnostic records for passed events as an array of `matlab.unittest.plugins.diagnosticrecord.QualificationDiagnosticRecord` instances.

Input Arguments

`records` — Recorded diagnostics on test result
array of `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord` instances

Recorded diagnostics on a test result, specified as an array of `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord` instances. Access recorded diagnostics via the `DiagnosticRecord` field in the `Details` property on `TestResult`. For example, if your test results are stored in the variable `results`, find the recorded diagnostics for the second test by invoking `records = result(2).Details.DiagnosticRecord`.

Examples

Select Diagnostics on Test Result

In your working folder, create a file, `ExampleTest.m`, containing the following test class. The intent of this test is to illustrate how to use the `DiagnosticsRecordingPlugin` plugin, and it is not intended to be a representative unit test.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods (Test)
        function testA(testCase)
            testCase.log(1,'Terse log message')  % logs
            testCase.log(3,'Detailed log message')  % logs
            testCase.verifyEqual(3+2,5)             % passes
            testCase.assumeTrue(true)               % passes
            testCase.verifyGreaterThan(5, 9)        % fails
            testCase.assertEqual(3.14,pi)           % fails/incomplete
        end
        function testB(testCase)
            % This test contains an intentional error - passing a character
            % instead of a variable to the ones function.
            a = [1 2];
            testCase.verifyEqual(ones('a'),[1 1]);  % errors
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class.

```
suite   = testsuite('ExampleTest');
```

Create a test runner with no plugins. This code creates a silent runner and provides you with complete control over the installed plugins. Add a `DiagnosticsRecordingPlugin` to the test runner.

```
import matlab.unittest.TestRunner;
import matlab.unittest.plugins.DiagnosticsRecordingPlugin;

runner = TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin);
```

Run the tests.

```
results = runner.run(suite);
```

Display the result from the second test. The test fails and is incomplete.

```
results(2)
```

```
ans = 

  TestResult with properties:

          Name: 'ExampleTest/testB'
        Passed: 0
        Failed: 1
    Incomplete: 1
      Duration: 7.8912e-04
       Details: [1×1 struct]

Totals:
   0 Passed, 1 Failed, 1 Incomplete.
   0.00078912 seconds testing time.
```

Index into the diagnostic record to display more information.

```
results(2).Details.DiagnosticRecord
```

```
ans = 

  ExceptionDiagnosticRecord with properties:

            Event: 'ExceptionThrown'
       EventScope: TestMethod
    EventLocation: 'ExampleTest/testB'
        Exception: [1×1 MException]
            Stack: [1×1 struct]
           Report: '=================================================================
```

The test throws an uncaught exception.

Collect the diagnostic records for the first test, `testA`.

```
testA_records = results(1).Details.DiagnosticRecord
```

```
testA_records = 

  1×3 heterogeneous DiagnosticRecord (LoggedDiagnosticRecord, QualificationDiagnosticRe

    Event
    EventScope
```

```
    EventLocation
    Stack
    Report
```

View the events that the plugin recorded for `testA`.

```
{testA_records.Event}'
```

```
ans =

  3×1 cell array

    'DiagnosticLogged'
    'VerificationFailed'
    'AssertionFailed'
```

The plugin records the message logged at a `Terse` level of verbosity, and the verification and assertion failures.

Create a plugin that records messages at all verbosity levels and includes passing diagnostics. Rerun the tests and collect the diagnostic records for `testA`.

```
runner = TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin(...
    'IncludingPassingDiagnostics',true,'Verbosity',4));
results = runner.run(suite);
testA_records = results(1).Details.DiagnosticRecord;
```

View the events that the plugin recorded for `testA`.

```
{testA_records.Event}'
```

```
ans =

  6×1 cell array

    'DiagnosticLogged'
    'DiagnosticLogged'
    'VerificationPassed'
    'AssumptionPassed'
    'VerificationFailed'
    'AssertionFailed'
```

The plugin records diagnostic information for all the qualifications and calls to the `log` method.

Select all the records with failing event diagnostics.

```
failedRecords = selectFailed(testA_records)
```

```
failedRecords =

  1×2 QualificationDiagnosticRecord array with properties:

    Event
    EventScope
    EventLocation
    TestDiagnosticResults
    FrameworkDiagnosticResults
    Stack
    Report
```

Select all the records with passing event diagnostics and display the report for the first record.

```
passedRecords = selectPassed(testA_records);
passedRecords(1).Report
```

```
ans =

'==============================================================================
Verification passed in ExampleTest/testA.

    ----------------------
    Framework Diagnostic:
    ----------------------
    verifyEqual passed.
    --> The values are equal using "isequaln".

    Actual double:
             5
    Expected double:
             5

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testA) at 6
==============================================================================='
```

Select all the records for incomplete events.

```
incompleteRecords = selectIncomplete(testA_records)
```

```
incompleteRecords = 

  QualificationDiagnosticRecord with properties:

                        Event: 'AssertionFailed'
                   EventScope: TestMethod
                EventLocation: 'ExampleTest/testA'
         TestDiagnosticResults: [1×0 matlab.unittest.diagnostics.DiagnosticResult]
    FrameworkDiagnosticResults: [1×1 matlab.unittest.diagnostics.DiagnosticResult]
                        Stack: [1×1 struct]
                       Report: '=====================================================
```

Since this event is an assertion failure, the framework also returns this record with the failing diagnostics as `failedRecords(2)`.

Select all the records with logged events and display the logged messages.

```
loggedRecords = selectLogged(testA_records);
{loggedRecords.Report}'
```

```
ans = 

  2×1 cell array

    '   [Terse] Diagnostic logged (2016-12-12T12:28:07): Terse log message'
    '[Detailed] Diagnostic logged (2016-12-12T12:28:07): Detailed log message'
```

- “Programmatically Access Test Diagnostics”

See Also

See Also

matlab.unittest.plugins.DiagnosticsRecordingPlugin | matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord | matlab.unittest.plugins.diagnosticrecord.QualificationDiagnosticRecord | selectFailed | selectIncomplete | selectLogged

Topics

“Programmatically Access Test Diagnostics”

Introduced in R2016a

matlab.unittest.plugins.DiagnosticsValidationPlugin class

Package: matlab.unittest.plugins

Plugin to help validate diagnostic code

Description

The `DiagnosticsValidationPlugin` creates a plugin to help validate diagnostic code.

Add the `DiagnosticsValidationPlugin` to the `TestRunner` to confirm that user-supplied diagnostics execute correctly. This plugin is useful because typically tests do not encounter failure conditions. A failure can result in unexercised diagnostic code. If a programming error exists in this diagnostic code, the error is not evident unless the test fails. However, at this point in the testing process, the diagnostics for the failure condition are lost due to the error in the diagnostic code.

Use this plugin to unconditionally evaluate the diagnostics supplied by the test writer, regardless of whether the test results in a passing or failing condition. This approach helps you to confirm that all of the diagnostic code is free from programming errors.

The diagnostic analysis can reduce the test performance and can result in very verbose text output. Be aware of these impacts before using this plugin for routine testing.

Construction

`matlab.unittest.plugins.DiagnosticsValidationPlugin` creates a plugin to help validate diagnostic code.

`matlab.unittest.plugins.DiagnosticsValidationPlugin(stream)` redirects all the text output to the output stream, `stream`. If you do not specify the output stream, the plugin uses the default `ToStandardOutput` stream.

Input Arguments

stream

Location where the plugin directs text output, specified as an `OutputStream`.

Default: `ToStandardOutput`

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Add Plugin to TestRunner

In your working folder, create a file, `ExampleTest.m`, containing the following test class. In this example, the `testThree` method has an intentional error. The method should use a function handle to the `dir` function as a `FunctionHandleDiagnostic`, but `dir` is misspelled.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)
            % test code
        end
        function testTwo(testCase)
            % test code
        end
        function testThree(testCase)
            % The following should use @dir as a function handle,
            % but there is a typo
            testCase.verifyEqual('myfile','myfile', @dri)
        end
    end
end
```

All of the tests in `ExampleTest.m` result in a passing condition, but there is an error in the diagnostic.

At the command prompt, create a test suite from the `ExampleTest` class.

```
import matlab.unittest.TestRunner
import matlab.unittest.TestSuite
import matlab.unittest.plugins.DiagnosticsValidationPlugin

suite = TestSuite.fromClass(?ExampleTest);
```

Create a test runner with no plugins. This code creates a silent runner and provides you with complete control over the installed plugins.

```
runner = TestRunner.withTextOutput;
```

Run the tests.

```
result1 = runner.run(suite);
```

```
Running ExampleTest
...
Done ExampleTest
__________
```

No diagnostic output is displayed because all the tests passed. The testing framework does not encounter the bug in the `FunctionHandleDiagnostic` of `testThree`.

Add `DiagnosticValidationPlugin` to the runner and run the tests.

```
runner.addPlugin(DiagnosticsValidationPlugin)
result2 = runner.run(suite);
```

```
Running ExampleTest
..
------------------------------
Validation of Test Diagnostic:
------------------------------
Error occurred while capturing diagnostics:
Error using evalc
Undefined function or variable 'dri'.

Error in ExampleTest/testThree (line 12)
            testCase.verifyEqual('myfile','myfile', @dri);

.
Done ExampleTest
__________
```

The framework executes the diagnostic provided by the `FunctionHandleDiagnostic`, even though none of the tests fails. Without this plugin, the test framework only encounters the bug if the test fails.

See Also

See Also

`matlab.unittest.diagnostics` | `matlab.unittest.plugins` | OutputStream | ToStandardOutput

matlab.unittest.plugins.FailureDiagnosticsPlugin class

Package: matlab.unittest.plugins

Plugin to show diagnostics on failure

Description

The `FailureDiagnosticsPlugin` creates a plugin to show diagnostics upon encountering a test failure. Add it to the `TestRunner` to output test failure diagnostics to the Command Window. This plugin is used by default when you construct a test runner using `TestRunner.withTextOutput`.

Construction

`matlab.unittest.plugins.FailureDiagnosticsPlugin` creates a plugin to show diagnostics upon encountering a test failure.

`matlab.unittest.plugins.FailureDiagnosticsPlugin(stream)` redirects all the text output to the output stream, `stream`. If you do not specify the output stream, the plugin uses the `ToStandardOutput` stream.

Input Arguments

`stream`

Location where the plugin directs text output, specified as an `OutputStream`.

Default: `ToStandardOutput`

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Add Plugin to TestRunner

In your working folder, create a file, `ExampleTest.m`, containing the following test class.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testPathAdd(testCase)
            % test code
        end
        function testOne(testCase)  % Test fails
            testCase.verifyEqual(5, 4, 'Testing 5==4')
        end
         function testTwo(testCase)  % Test passes
             testCase.verifyEqual(5, 5, 'Testing 5==5')
        end
    end
end
```

The `verifyEqual` qualification in `testOne` causes a test failure.
The qualifications in `testOne` and `testTwo` include an instance of a `matlab.unittest.diagnostics.StringDiagnostic`.

At the command prompt, create a test suite from the `ExampleTest` class.

```
import matlab.unittest.TestRunner
import matlab.unittest.TestSuite
import matlab.unittest.plugins.FailureDiagnosticsPlugin

suite = TestSuite.fromClass(?ExampleTest);
```

Create a test runner with no plugins. This code creates a silent runner and provides you with complete control over the installed plugins.

```
runner = TestRunner.withNoPlugins;
```

Run the tests.

```
result1 = runner.run(suite);
```

No output is displayed, but `result1` contains information about the failed test.

Add `FailureDiagnosticsPlugin` to the runner and run the tests.

```
runner.addPlugin(FailureDiagnosticsPlugin)
result2 = runner.run(suite);
```

```
==============================================================================
Verification failed in ExampleTest/testOne.

    ----------------
    Test Diagnostic:
    ----------------
    Testing 5==4

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                5         4           1        0.25

    Actual double:
             5
    Expected double:
             4

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 7
==============================================================================
Failure Summary:

     Name                 Failed  Incomplete  Reason(s)
    ================================================================
     ExampleTest/testOne    X                 Failed by verification.
```

The framework displays the `DiagnosticResult` of the `StringDiagnostic` for failed tests only. It also displays additional framework diagnostics. The `TestResult` object, `result2`, is the same as `result1`.

See Also

See Also

`matlab.unittest.diagnostics` | `matlab.unittest.plugins` | OutputStream | ToStandardOutput

Introduced in R2013a

matlab.unittest.plugins.FailOnWarningsPlugin class

Package: matlab.unittest.plugins

Plugin to fail tests that issue warnings

Description

The `FailOnWarningsPlugin` creates a plugin that, when added to the `TestRunner`, fails any test that issues a warning. The plugin produces a qualification failure in the test scope that issues the warning. For example, if a shared test fixture issues a warning, the plugin produces a qualification failure on the fixture and fails all tests that share the fixture.

The `FailOnWarningsPlugin` plugin does not produce a failure if:

- A test accounts for the warning through a constraint such as `IssuesWarnings` or `IssuesNoWarnings`, regardless of whether the constraint is satisfied or not.
- A warning is disabled. For example, if you disable a warning using the `SupressedWarningsFixture`.

Construction

`matlab.unittest.plugins.FailOnWarningsPlugin` creates a plugin that fails any test that issues a warning.

`matlab.unittest.plugins.FailOnWarningsPlugin('Ignoring',warnIDs)` creates a plugin that does not fail for the specified warning identifiers, `warnIDs`.

Input Arguments

`warnIDs` — Identifiers for warnings to ignore
cell array of character vectors

Identifiers for warnings to ignore, specified as a cell array of character vectors. The plugin does not fail a test for the warnings with identifiers included in `warnIDs`.

Example: `FailOnWarningsPlugin('Ignoring',{'MATLAB:singularMatrix'})`

Properties

`Ignore` — Values to ignore
empty cell array (default) | cell array of character vectors

The `Ignore` property is empty by default. To specify the property as a cell array of character vectors, use the `'Ignoring'` syntax when you construct the plugin instance.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Fail Tests If They Issue Warnings

Create the `solve` function to solve a set of linear equations. There is an intentional error in the `solve` function — the `assert` call that checks whether the matrix is singular should use `rcond` instead of `det`.

```
function x = solve(A,b)

assert(abs(det(A)) > 1e-12,... % intentional bug for illustrative purposes
    'The matrix is singular or nearly singular');

x = A\b;
```

Create the following test class. In `testTwo`, the `A` matrix is singular, but since there is a bug in the `solve` function, the `assert` call does not catch it.

```
classdef TestSolve < matlab.unittest.TestCase

    methods(Test)
        function testOne(testCase)
            A = eye(3);
            b = [3; 4; 1];
            testCase.verifyEqual(solve(A b),b);
        end
```

```
        function testTwo(testCase)
            A = [1e-100 0; 0 1e100];
            b = [5; 5];
            expX = [5e100 5e-100];
            testCase.verifyEqual(solve(A,b),expX);
        end
    end
end
```

At the command prompt, create a test suite, and test runner.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
import matlab.unittest.plugins.FailOnWarningsPlugin;

suite = TestSuite.fromClass(?TestSolve);
runner = TestRunner.withTextOutput;
```

Add the `FailOnWarningsPlugin` plugin, and run the tests. `testTwo` fails because the `solve` function issues a warning. Without `FailOnWarningsPlugin`, the `solve` function issues the warning, but both tests pass.

```
runner.addPlugin(FailOnWarningsPlugin);
result = runner.run(suite);
```

```
Running TestSolve
.Warning: Matrix is close to singular or badly scaled. Results may be inaccurate. RCOND
.
================================================================================
Verification failed in TestSolve/testTwo.

    ---------------------
    Framework Diagnostic:
    ---------------------
    TestSolve/testTwo issued warnings:

        ---------------------------
        MATLAB:nearlySingularMatrix
        ---------------------------
        Matrix is close to singular or badly scaled. Results may be inaccurate. RCOND =
            In C:\work\solve.m (solve) at 6
            In C:\work\TestSolve.m (TestSolve.testTwo) at 14

    ------------------
    Stack Information:
```

```
    ------------------
    In C:\Program Files\MATLAB\R2015b\toolbox\matlab\testframework\+matlab\+unittest\+p
==============================================================================

Done TestSolve
_________

Failure Summary:

     Name               Failed  Incomplete  Reason(s)
    ===============================================================
     TestSolve/testTwo    X                 Failed by verification.
```

Tips

- Set the warning stack trace display using the `warning` function. For example, `warning('off','backtrace')`.
- Disable warnings using the `SuppressedWarningsFixture` class.

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.plugins.TestRunnerPlugin | matlab.unittest.constraints.IssuesWarnings | matlab.unittest.constraints.IssuesNoWarnings | matlab.unittest.fixtures.SuppressedWarningsFixture | `warning`

Introduced in R2015b

matlab.unittest.plugins.LoggingPlugin class

Package: matlab.unittest.plugins

Plugin to report diagnostic messages

Description

The `LoggingPlugin` creates a plugin to report diagnostic messages that are created by the `log` method of a `TestCase` or `Fixture`.

Construction

Instantiate a `LoggingPlugin` using one of its static methods.

Use the `withVerbosity` static method to configure a plugin to respond to messages of a particular verbosity. Also, the `withVerbosity` method accepts a number of name/value pairs to configure the format for reporting logged messages.

Properties

`Description` — Logged diagnostic message description

`'Diagnostic logged'` (default) | character vector | string scalar

Logged diagnostic message description, specified as a character vector or string scalar. The value of this property is printed alongside each logged diagnostic message. `Description` is read only, and its value is set during construction.

`HideLevel` — Indicator to display verbosity level

`false` (default) | `true`

Indicator to display the verbosity level alongside each logged diagnostic, specified as `false` (`logical(0)`) or `true` (`logical(1)`). By default, this property is `false` and the test framework displays the verbosity level. `HideLevel` is read only, and its value is set during construction.

`HideTimestamp` — Indicator to display timestamp

`false` (default) | `true`

Indicator to display the timestamp from when the test framework generates the logged message alongside each logged diagnostic, specified as `false` (`logical(0)`) or `true` (`logical(1)`). By default, this property is `false` and the test framework displays the timestamp. `HideTimestamp` is read only, and its value is set during construction.

`NumStackFrames` — Number of stack frames to display

`0` (default) | integer value | `Inf`

Number of stack frames to display after each logged diagnostic message, specified as an integer value. By default, this property is `0`, and the test framework does not display stack information. If `NumStackFrames` is `Inf`, the test framework displays all available stack frames. `NumStackFrames` is read only, and its value is set during construction.

`Verbosity` — Verbosity levels supported by plugin instance

array of `matlab.unittest.Verbosity` instances

Verbosity levels supported by plugin instance, specified as an array of `matlab.unittest.Verbosity` instances. The plugin reacts to diagnostics that are logged at a verbosity level listed in this array. `Verbosity` is read only, and its value is set during construction.

Methods

withVerbosity	Construct LoggingPlugin for messages of specified verbosity

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.unittest.Verbosity | matlab.unittest.fixtures.Fixture.log | matlab.unittest.TestCase.log

Introduced in R2014b

matlab.unittest.plugins.LoggingPlugin.withVerbosity

Class: matlab.unittest.plugins.LoggingPlugin
Package: matlab.unittest.plugins

Construct LoggingPlugin for messages of specified verbosity

Syntax

```
matlab.unittest.plugins.LoggingPlugin.withVerbosity(v)
matlab.unittest.plugins.LoggingPlugin.withVerbosity(v,stream)
matlab.unittest.plugins.LoggingPlugin.withVerbosity(v,Name,Value)
```

Description

`matlab.unittest.plugins.LoggingPlugin.withVerbosity(v)` constructs a `LoggingPlugin` for messages of the specified verbosity.

`matlab.unittest.plugins.LoggingPlugin.withVerbosity(v,stream)` redirects the text output to the output stream.

`matlab.unittest.plugins.LoggingPlugin.withVerbosity(v,Name,Value)` includes additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

v — Verbosity levels supported by plugin instance

`1 | 2 | 3 | 4 | matlab.unittest.Verbosity` enumeration

Verbosity levels supported by the plugin instance, specified as an integer value between 1 and 4 or a `matlab.unittest.Verbosity` enumeration object. The plugin reacts to diagnostics that are logged at this level and lower. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration.

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
1	`matlab.unittest.Verbosity.Ter`	minimal amount of information

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
2	`matlab.unittest.Verbosity.Con`	typical amount of information
3	`matlab.unittest.Verbosity.Det`	supplemental amount of information
4	`matlab.unittest.Verbosity.Ver`	surplus of information

`stream` — Location where plugin directs text output
`ToStandardOutput` instance (default) | `OutputStream` instance

Location where the plugin directs text output, specified as an `OutputStream` instance. By default, the plugin uses the `OutputStream` subclass `ToStandardOutput` as the stream.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'Description'` — Logged diagnostic message description
`'Diagnostic logged'` (default) | character vector | string scalar

Logged diagnostic message description, specified as a character vector or string scalar. This value is printed alongside each logged diagnostic message. If the value empty, the test framework does not display a description.

`'ExcludingLowerLevels'` — Indicator to display messages logged at levels lower than the verbosity level
`false` (default) | `true`

Indicator to display messages logged at levels lower than the verbosity level, `v`, specified as `false` or `true` (`logical(0)` or `logical(1)`). By default, the value is `false` and the plugin reacts to all messages logged at level `v` or lower. If the value is `true`, the plugin reacts only to messages logged at level `v`.

`'HideLevel'` — Indicator to display verbosity level
`false` (default) | `true`

Indicator to display the verbosity level alongside each logged diagnostic, specified as `false` or `true` (`logical(0)` or `logical(1)`). By default, the value is `false` and the test framework displays the verbosity level.

`'HideTimestamp'` — Indicator to display timestamp
`false` (default) | `true`

Indicator to display the timestamp from when the test framework generates the logged message alongside each logged diagnostic, specified as `false` or `true` (`logical(0)` or `logical(1)`). By default, the value is `false` and the test framework displays the timestamp.

`'NumStackFrames'` — Number of stack frames to display
`0` (default) | integer value | `Inf`

Number of stack frames to display after each logged diagnostic message, specified as an integer value. By default, the value is `0`, and the test framework does not display stack information. If `NumStackFrames` is `Inf`, the test framework displays all available stack frames.

Examples

Create Logging Plugin

Create a function-based test in a file, `sampleLogTest.m`, in your working folder.

```
function tests = sampleLogTest
tests = functiontests(localfunctions);

function svdTest(testCase)
import matlab.unittest.Verbosity

log(testCase,'Generating matrix.');
m = rand(1000);

log(testCase,1,'About to call SVD.');
[U,S,V] = svd(m);

log(testCase,Verbosity.Terse,'SVD finished.');

verifyEqual(testCase,U*S*V',m,'AbsTol',1e-6)
```

At the command prompt, run the test.

```
results = run(sampleLogTest);
```

```
Running sampleLogTest
   [Terse] Diagnostic logged (2014-04-14T14:20:59): About to call SVD.
   [Terse] Diagnostic logged (2014-04-14T14:20:59): SVD finished.
.
Done sampleLogTest
__________
```

The default runner reports the diagnostics at level 1 (`Terse`).

Create a test runner to report the diagnostics at levels 1 and 2, and rerun the test.

```
import matlab.unittest.TestRunner
import matlab.unittest.plugins.LoggingPlugin

runner = TestRunner.withNoPlugins;
p = LoggingPlugin.withVerbosity(2);
runner.addPlugin(p);

results = runner.run(sampleLogTest);
```

```
 [Concise] Diagnostic logged (2014-04-14T14:28:14): Generating matrix.
   [Terse] Diagnostic logged (2014-04-14T14:28:14): About to call SVD.
   [Terse] Diagnostic logged (2014-04-14T14:28:15): SVD finished.
```

Configure Logged Message Output

Create the following class In a file in your current working folder, `ExampleLogTest.m`.

```
classdef ExampleLogTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)  % Test fails
            log(testCase,3,'Starting Test')
            log(testCase,'Testing 5==4')
            testCase.verifyEqual(5,4)
            log(testCase,4,'Test Complete')
        end
        function testTwo(testCase)  % Test passes
            log(testCase,matlab.unittest.Verbosity.Detailed,'Starting Test')
            log(testCase,'Testing 5==5')
            testCase.verifyEqual(5,5)
            log(testCase,matlab.unittest.Verbosity.Verbose,'Test Complete')
```

```
        end
    end
end
```

The log messages in `testTwo` uses `Verbosity` enumerations instead of the corresponding integers.

At the command prompt, create the test suite and a runner at verbosity level 4, and then run the test.

```
import matlab.unittest.TestSuite
import matlab.unittest.TestRunner
import matlab.unittest.plugins.LoggingPlugin
suite   = TestSuite.fromClass(?ExampleLogTest);

runner = TestRunner.withNoPlugins;
p = LoggingPlugin.withVerbosity(4);
runner.addPlugin(p);

results = runner.run(suite);
```

```
[Detailed] Diagnostic logged (2014-04-14T15:24:03): Starting Test
 [Concise] Diagnostic logged (2014-04-14T15:24:03): Testing 5==4
 [Verbose] Diagnostic logged (2014-04-14T15:24:03): Test Complete
[Detailed] Diagnostic logged (2014-04-14T15:24:03): Starting Test
 [Concise] Diagnostic logged (2014-04-14T15:24:03): Testing 5==5
 [Verbose] Diagnostic logged (2014-04-14T15:24:03): Test Complete
```

Create a new plugin to direct the output to a file, `myOutput.log`, and rerun the tests.

```
import matlab.unittest.plugins.ToFile
outFile = 'myOutput.log';

runner = TestRunner.withNoPlugins;
p = LoggingPlugin.withVerbosity(4,ToFile(outFile));
runner.addPlugin(p);

results = runner.run(suite);
```

Observe the contents in the file created by the plugin.

```
disp(fileread(outFile))
```

```
[Detailed] Diagnostic logged (2014-04-14T15:27:44): Starting Test
 [Concise] Diagnostic logged (2014-04-14T15:27:44): Testing 5==4
```

```
 [Verbose] Diagnostic logged (2014-04-14T15:27:44): Test Complete
[Detailed] Diagnostic logged (2014-04-14T15:27:44): Starting Test
 [Concise] Diagnostic logged (2014-04-14T15:27:44): Testing 5==5
 [Verbose] Diagnostic logged (2014-04-14T15:27:44): Test Complete
```

Create a new plugin that does not display level 4 messages. Do not display the verbosity level or timestamp. Rerun the tests.

```
runner = TestRunner.withNoPlugins;
p = LoggingPlugin.withVerbosity(matlab.unittest.Verbosity.Detailed,...
    'HideLevel',true,'HideTimestamp',true);
runner.addPlugin(p);

results = runner.run(suite);
```

```
Diagnostic logged: Starting Test
Diagnostic logged: Testing 5==4
Diagnostic logged: Starting Test
Diagnostic logged: Testing 5==5
```

See Also

See Also

matlab.unittest.plugins.OutputStream | matlab.unittest.plugins.ToStandardOutput | matlab.unittest.Verbosity | matlab.unittest.fixtures.Fixture.log | matlab.unittest.TestCase.log

Introduced in R2014b

matlab.unittest.plugins.OutputStream class

Package: matlab.unittest.plugins

Interface that determines where to send text output

Description

The `OutputStream` interface is an abstract interface class that you can use as a base class to specify where plugins direct their text output. To create a custom output stream, implement a `print` method that correctly handles the formatted text information the testing framework passes to it. Many text-oriented plugins accept an `OutputStream` to redirect the text they produce in a configurable manner.

Methods

print	Print text to output stream

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create Custom Output Stream

In a file in your working directory, create a new output stream class in the file `ToFigure.m`. This class allows plugin output to be redirected to a figure.

```
classdef ToFigure < matlab.unittest.plugins.OutputStream

    properties(SetAccess=private)
        Figure
    end
    properties(Access=private)
```

```
        ListBox
    end
```

This class uses two properties. `Figure` is the figure that receives and displays the output. `ListBox` is a handle to the list box that displays the text.

In the same file, add the following `methods` block.

```
    methods
        function print(stream,formatSpec,varargin)
            % Create the figure
            if isempty(stream.Figure) || ~ishghandle(stream.Figure)
                stream.createFigure
            end
            newStr = sprintf(formatSpec,varargin{:});
            oldStr = strjoin(stream.ListBox.String', '\n');

            % Create the full message
            fullStr = [oldStr,newStr];
            fullStrCell = strsplit(fullStr,'\n','CollapseDelimiters',false);

            % Set the string and selection
            stream.ListBox.String = fullStrCell';
            stream.ListBox.Value = numel(fullStrCell);
            drawnow
        end
    end
```

You must implement the `print` method for any subclass of `OutputStream`. In this example, the method creates a new figure (if necessary), formats the incoming text, and then adds it to the output stream.

In the same file, add the following `methods` block containing a helper function to create the figure.

```
    methods(Access=private)
        function createFigure(stream)
            stream.Figure = figure(...
                'Name',          'Unit Test Output', ...
                'WindowStyle',   'docked');

            stream.ListBox = uicontrol( ...
                'Parent',        stream.Figure, ...
                'Style',         'listbox', ...
```

```
                'String',       {}, ...
                'Units',        'normalized', ...
                'Position',     [.05 .05 .9 .9], ...
                'Max',          2, ...
                'FontName',     'Monospaced', ...
                'FontSize',      13);
        end
    end
end
```

In an new file in your working folder, create `ExampleTest.m` containing the following test class.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)  % Test fails
            testCase.verifyEqual(5, 4, 'Testing 5==4' );
        end
        function testTwo(testCase)  % Test passes
            testCase.verifyEqual(5, 5, 'Testing 5==5' );
        end
        function testThree(testCase)
            % test code
        end
    end
end
```

The `verifyEqual` qualification in `testOne` causes a test failure.
The qualifications in `testOne` and `testTwo` include an instance of a `matlab.unittest.diagnostics.StringDiagnostic`.

At the command prompt, create a test suite from the `ExampleTest` class.

```
import matlab.unittest.TestSuite
import matlab.unittest.TestRunner
import matlab.unittest.plugins.DiagnosticsValidationPlugin

suite = TestSuite.fromClass(?ExampleTest);
```

Create a test runner that displays output to the command window.

```
runner = TestRunner.withTextOutput;
```

Create a `DiagnosticsValidationPlugin` that explicitly specifies that its output should go to a figure via the `ToFigure` output stream.

```
plugin = DiagnosticsValidationPlugin(ToFigure);
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin)
result = runner.run(suite);
```

```
Running ExampleTest

================================================================================
Verification failed in ExampleTest/testOne.

    ----------------
    Test Diagnostic:
    ----------------
    Testing 5==4

    ----------------------
    Framework Diagnostic:
    ----------------------
    verifyEqual failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                5         4           1        0.25

    Actual double:
             5
    Expected double:
             4

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 4
================================================================================
...
Done ExampleTest
_________

Failure Summary:

     Name                 Failed  Incomplete  Reason(s)
```

```
    ==================================================================
     ExampleTest/testOne    X                 Failed by verification.
```

Only the test failures produce output to the screen. By default, `TestRunner.withTextOutput` uses a `FailureDiagnosticsPlugin` to display output on the screen.

In addition to the default text output being displayed on the screen, the `DiagnosticsValidationPlugin` output is directed to a docked figure. The figure shows the following text.

```
------------------------------
Validation of Test Diagnostic:
------------------------------
Testing 5==4
------------------------------
Validation of Test Diagnostic:
------------------------------
Testing 5==5
```

The `DiagnosticsValidationPlugin` displays the diagnostic information regardless of whether the tests encounter failure conditions.

See Also

See Also

matlab.unittest.plugins.OutputStream | `fprintf` | `matlab.unittest.plugins`

Introduced in R2014a

print

Class: matlab.unittest.plugins.OutputStream
Package: matlab.unittest.plugins

Print text to output stream

Syntax

```
print(stream,formatSpec,A1,...,An)
```

Description

`print(stream,formatSpec,A1,...,An)` formats the data in arrays `A1,...,An` according to `formatSpec`, and sends the result to the output stream, `stream`. Assign `formatSpec` and `A1,...,An` using the same interface that you use for `sprintf` and `fprintf`.

Input Arguments

`stream`

Output stream, specified as an instance of the `OutputStream` class

`formatSpec`

Format of text in output stream, specified as a character vector. For information on the construction of `formatSpec`, see the input argument entry on the `fprintf` or `sprint` reference pages.

`A`

Numeric or character arrays, specified as a scalar, vector, matrix, or multidimensional array.

Examples

Create Custom Output Stream

In a file in your working directory, create a new output stream class in the file `ToFigure.m`. This class allows plugin output to be redirected to a figure.

```
classdef ToFigure < matlab.unittest.plugins.OutputStream

    properties(SetAccess=private)
        Figure
    end
    properties(Access=private)
        ListBox
    end
```

This class uses two properties. `Figure` is the figure that receives and displays the output. `ListBox` is a handle to the list box that displays the text.

In the same file, add the following `methods` block.

```
    methods
        function print(stream,formatSpec,varargin)
            % Create the figure
            if isempty(stream.Figure) || ~ishghandle(stream.Figure)
                stream.createFigure
            end
            newStr = sprintf(formatSpec,varargin{:});
            oldStr = strjoin(stream.ListBox.String', '\n');

            % Create the full message
            fullStr = [oldStr,newStr];
            fullStrCell = strsplit(fullStr,'\n','CollapseDelimiters',false);

            % Set the string and selection
            stream.ListBox.String = fullStrCell';
            stream.ListBox.Value = numel(fullStrCell);
            drawnow
        end
    end
```

You must implement the `print` method for any subclass of `OutputStream`. In this example, the method creates a new figure (if necessary), formats the incoming text, and then adds it to the output stream.

In the same file, add the following `methods` block containing a helper function to create the figure.

```
    methods(Access=private)
        function createFigure(stream)
            stream.Figure = figure(...
                'Name',          'Unit Test Output', ...
                'WindowStyle',   'docked');

            stream.ListBox = uicontrol( ...
                'Parent',        stream.Figure, ...
                'Style',         'listbox', ...
                'String',        {}, ...
                'Units',         'normalized', ...
                'Position',      [.05 .05 .9 .9], ...
                'Max',           2, ...
                'FontName',      'Monospaced', ...
                'FontSize',       13);
        end
    end
end
```

In an new file in your working folder, create `ExampleTest.m` containing the following test class.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)  % Test fails
            testCase.verifyEqual(5, 4, 'Testing 5==4' );
        end
        function testTwo(testCase)  % Test passes
            testCase.verifyEqual(5, 5, 'Testing 5==5' );
        end
        function testThree(testCase)
            % test code
        end
    end
end
```

The `verifyEqual` qualification in `testOne` causes a test failure.
The qualifications in `testOne` and `testTwo` include an instance of a `matlab.unittest.diagnostics.StringDiagnostic`.

At the command prompt, create a test suite from the `ExampleTest` class.

```
import matlab.unittest.TestSuite
import matlab.unittest.TestRunner
import matlab.unittest.plugins.DiagnosticsValidationPlugin

suite = TestSuite.fromClass(?ExampleTest);
```

Create a test runner that displays output to the command window.

```
runner = TestRunner.withTextOutput;
```

Create a `DiagnosticsValidationPlugin` that explicitly specifies that its output should go to a figure via the `ToFigure` output stream.

```
plugin = DiagnosticsValidationPlugin(ToFigure);
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin)
result = runner.run(suite);
```

```
Running ExampleTest

================================================================================
Verification failed in ExampleTest/testOne.

    ----------------
    Test Diagnostic:
    ----------------
    Testing 5==4

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                5         4           1        0.25

    Actual double:
             5
    Expected double:
             4
```

```
    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 4
================================================================================
...
Done ExampleTest
__________

Failure Summary:

     Name                 Failed  Incomplete  Reason(s)
    ===============================================================
     ExampleTest/testOne    X                 Failed by verification.
```

Only the test failures produce output to the screen. By default, `TestRunner.withTextOutput` uses a `FailureDiagnosticsPlugin` to display output on the screen.

In addition to the default text output being displayed on the screen, the `DiagnosticsValidationPlugin` output is directed to a docked figure. The figure shows the following text.

```
------------------------------
Validation of Test Diagnostic:
------------------------------
Testing 5==4
------------------------------
Validation of Test Diagnostic:
------------------------------
Testing 5==5
```

The `DiagnosticsValidationPlugin` displays the diagnostic information regardless of whether the tests encounter failure conditions.

See Also

See Also

`fprintf` | `sprintf`

Introduced in R2014a

matlab.unittest.plugins.QualifyingPlugin class

Package: matlab.unittest.plugins
Superclasses: matlab.unittest.plugins.TestRunnerPlugin

Interface for plugins that perform system-wide qualifications

Description

Use qualifying plugins to produce test failures apart from your test content. Qualifications at the plugin level are useful because you can avoid repeating the same qualification in every test. You can decide to apply system-wide qualifications to the test suite periodically by simply adding the plugin to the test runner for a particular test session.

The `QualifyingPlugin` interface enables test runner plugin authors to implement plugins that perform system-wide qualifications on a test suite. You can perform verifications, assumptions, assertions, and fatal assertions in these inherited methods:

- `setupTestClass`
- `teardownTestClass`
- `setupTestMethod`
- `teardownTestMethod`

You can perform only assumptions, assertions, and fatal assertions in these inherited methods:

- `setupSharedTestFixture`
- `teardownSharedTestFixture`

Methods

assertUsing	Assert that value satisfies given constraint
assumeUsing	Assume that value satisfies given constraint
fatalAssertUsing	Fatally assert that value satisfies given constraint

verifyUsing	Verify that value satisfies given constraint

Inherited Methods

createSharedTestFixture	Extend creation of shared test fixture instances
createTestClassInstance	Extend creation of class-level TestCase instances
createTestMethodInstance	Extend creation of method-level TestCase instances
reportFinalizedResult	Enable reporting of finalized TestResults
runTest	Extend running of single TestSuite element
runTestClass	Extend running of TestSuite array from same class or function
runTestSuite	Extend running of TestSuite array
runTestMethod	Extend running of single Test method
setupSharedTestFixture	Extend setting up shared test fixture
setupTestClass	Extend setting up test class
setupTestMethod	Extend setting up of test method
teardownSharedTestFixture	Extend tearing down shared test fixture
teardownTestClass	Extend tearing down of test class
teardownTestMethod	Extend tearing down of test method

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test Using Qualification in Plugin

Create a plugin to ensure that test files leaves the MATLAB path unchanged. If the path after running the test file is different from the starting path, the test fails.

Create a class, `VerifyNoPathChangePlugin`, that inherits from the `matlab.unittest.plugins.QualifyingPlugin` class.

```
classdef VerifyNoPathChangePlugin < matlab.unittest.plugins.QualifyingPlugin
    properties (Access=private)
        OriginalPath
    end

    methods (Access=protected)
        function setupTestClass(plugin, pluginData)
            plugin.OriginalPath = path;
            setupTestClass@matlab.unittest.plugins.QualifyingPlugin(plugin,pluginData)
        end
        function teardownTestClass(plugin, pluginData)
            import matlab.unittest.constraints.IsEqualTo;
            teardownTestClass@matlab.unittest.plugins.QualifyingPlugin(plugin,pluginDat
            plugin.verifyUsing(pluginData.QualificationContext, ...
                path, IsEqualTo(plugin.OriginalPath), ...
                sprintf('%s modified the path.', pluginData.Name));
        end
    end
end
```

Create the following test class. The test modifies the path, but does not restore the original path.

```
classdef LeavesModifiedPath < matlab.unittest.TestCase
    methods (Test)
        function test1(~)
            addpath(pwd);
        end
    end
end
```

For purposes of this example, at the command prompt, remove the present working folder from the path.

```
rmpath(pwd)
```

Create a test suite, add the plugin to the test runner, and run the suite. The test fails because the path after the test is different from the starting path.

```
suite = matlab.unittest.TestSuite.fromClass(?LeavesModifiedPath);
runner = matlab.unittest.TestRunner.withTextOutput;
```

```
runner.addPlugin(VerifyNoPathChangePlugin);
runner.run(suite);
```

```
Running LeavesModifiedPath
.
================================================================================
Verification failed while setting up or tearing down LeavesModifiedPath.
As a result, all LeavesModifiedPath tests failed.

    ----------------
    Test Diagnostic:
    ----------------
    LeavesModifiedPath modified the path.

    ---------------------
    Framework Diagnostic:
    ---------------------
    IsEqualTo failed.
    --> StringComparator failed.
        --> The character arrays are not equal.

    Actual char:
        C:\work;C:\Program Files\MATLAB\R2015b\toolbox\matlab\...
   Expected char:
        C:\Program Files\MATLAB\R2015b\toolbox\matlab\...

    ------------------
    Stack Information:
    ------------------
    In C:\work\VerifyNoPathChangePlugin.m (VerifyNoPathChangePlugin.teardownTestClass)
================================================================================

Done LeavesModifiedPath
__________

Failure Summary:

     Name                      Failed  Incomplete  Reason(s)
    ===========================================================================
     LeavesModifiedPath/test1    X                 Failed by verification.
```

- “Add Plugin to Test Runner”
- “Write Plugins to Extend TestRunner”
- “Create Custom Plugin”

See Also

See Also

matlab.unittest.plugins.TestRunnerPlugin |
matlab.unittest.plugins.plugindata.QualificationContext |
matlab.unittest.plugins.FailOnWarningsPlugin

Topics

"Add Plugin to Test Runner"
"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2015b

assertUsing

Class: matlab.unittest.plugins.QualifyingPlugin
Package: matlab.unittest.plugins

Assert that value satisfies given constraint

Syntax

```
assertUsing(plugin,context,actual,constraint)
assertUsing(plugin,context,actual,constraint,diagnostic)
```

Description

`assertUsing(plugin,context,actual,constraint)` asserts that `actual` is a value that satisfies the given constraint, `constraint`, using the qualification `context`. If the actual value does not satisfy the constraint, the testing framework reports an assertion failure.

You can perform assertions in these `QualifyingPlugin` methods:

- `setupSharedTestFixture`
- `teardownSharedTestFixture`
- `setupTestClass`
- `teardownTestClass`
- `setupTestMethod`
- `teardownTestMethod`

`assertUsing(plugin,context,actual,constraint,diagnostic)` displays the diagnostic information, `diagnostic`, upon failure.

Input Arguments

`plugin` — Qualifying plugin instance
`matlab.unittest.plugins.QualifyingPlugin`

Plugin instance, specified as an instance of the `matlab.unittest.plugins.QualifyingPlugin` class.

`context` — Context for plugins
`matlab.unittest.plugins.plugindata.QualificationContext`

Context for plugins, specified as an instance of `matlab.unittest.plugins.plugindata.QualificationContext` class. This instance provides the context for the plugin to perform qualifications on test suites. The plugin obtains this context from the plugin data.

`actual` — Value to test
workspace variable

Value to test, specified as a workspace variable. `actual` can be any data type. The qualification passes when `actual` satisfies the specified constraint, `constraint`.

`constraint` — Condition test must satisfy
instance of class in `matlab.unittest.constraints` package

Condition the test must satisfy, specified as an instance of a class in the `matlab.unittest.constraints` package.

`diagnostic` — Diagnostic information to display
string | character vector | function handle | instance of class in `matlab.unittest.diagnostics` package

Diagnostic information to display upon failure, specified as a string, a character vector, a function handle, or an instance of a class in the `matlab.unittest.diagnostics` package.

Examples

Use Qualifications in Plugin

See examples for the QualifyingPlugin class and replace calls to `verifyUsing` with `assertUsing`.

Tips

Use the `QualifyingPlugin.assertUsing` method when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the associated test content as failed and incomplete. Alternatively,

- Use the `QualifyingPlugin.verifyUsing` method to produce and record failures without throwing an exception. Because a `QualifyingPlugin` performs additional qualifications beyond the ones defined in the unit tests, it typically uses verifications. Verifications do not cause an early exit from the test, ensuring that the test framework executes all test content. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use the `QualifyingPlugin.assumeUsing` method to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the associated test content as `Incomplete`.
- Use the `QualifyingPlugin.fatalAssertUsing` method to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

See Also

See Also

matlab.unittest.plugins.QualifyingPlugin

Introduced in R2015b

assumeUsing

Class: matlab.unittest.plugins.QualifyingPlugin
Package: matlab.unittest.plugins

Assume that value satisfies given constraint

Syntax

```
assumeUsing(plugin,context,actual,constraint)
assumeUsing(plugin,context,actual,constraint,diagnostic)
```

Description

`assumeUsing(plugin,context,actual,constraint)` assumes that `actual` is a value that satisfies the given constraint, `constraint`, using the qualification `context`. If the actual value does not satisfy the constraint, the testing framework reports an assumption failure.

You can perform assumptions in these `QualifyingPlugin` methods:

- `setupSharedTestFixture`
- `teardownSharedTestFixture`
- `setupTestClass`
- `teardownTestClass`
- `setupTestMethod`
- `teardownTestMethod`

`assumeUsing(plugin,context,actual,constraint,diagnostic)` displays the diagnostic information, `diagnostic`, upon failure.

Input Arguments

`plugin` — Qualifying plugin instance
`matlab.unittest.plugins.QualifyingPlugin`

Plugin instance, specified as an instance of the `matlab.unittest.plugins.QualifyingPlugin` class.

`context` — Context for plugins
`matlab.unittest.plugins.plugindata.QualificationContext`

Context for plugins, specified as an instance of `matlab.unittest.plugins.plugindata.QualificationContext` class. This instance provides the context for the plugin to perform qualifications on test suites. The plugin obtains this context from the plugin data.

`actual` — Value to test
workspace variable

Value to test, specified as a workspace variable. `actual` can be any data type. The qualification passes when `actual` satisfies the specified constraint, `constraint`.

`constraint` — Condition test must satisfy
instance of class in `matlab.unittest.constraints` package

Condition the test must satisfy, specified as an instance of a class in the `matlab.unittest.constraints` package.

`diagnostic` — Diagnostic information to display
string | character vector | function handle | instance of class in `matlab.unittest.diagnostics` package

Diagnostic information to display upon failure, specified as a string, a character vector, a function handle, or an instance of a class in the `matlab.unittest.diagnostics` package.

Examples

Use Qualifications in Plugin

See examples for the QualifyingPlugin class and replace calls to `verifyUsing` with `assumeUsing`.

Tips

Use the `QualifyingPlugin.assumeUsing` method to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the associated test content as `Incomplete`. Alternatively,

- Use the `QualifyingPlugin.verifyUsing` method to produce and record failures without throwing an exception. Because a `QualifyingPlugin` performs additional qualifications beyond the ones defined in the unit tests, it typically uses verifications. Verifications do not cause an early exit from the test, ensuring that the test framework executes all test content. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use the `QualifyingPlugin.assertUsing` method when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the associated test content as failed and incomplete.
- Use the `QualifyingPlugin.fatalAssertUsing` method to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

See Also

See Also

matlab.unittest.plugins.QualifyingPlugin

Introduced in R2015b

fatalAssertUsing

Class: matlab.unittest.plugins.QualifyingPlugin
Package: matlab.unittest.plugins

Fatally assert that value satisfies given constraint

Syntax

```
fatalAssertUsing(plugin,context,actual,constraint)
fatalAssertUsing(plugin,context,actual,constraint,diagnostic)
```

Description

`fatalAssertUsing(plugin,context,actual,constraint)` fatally asserts that `actual` is a value that satisfies the given constraint, `constraint`, using the qualification `context`. If the actual value does not satisfy the constraint, the testing framework reports a fatal assertion failure.

You can perform fatal assertions in these `QualifyingPlugin` methods:

- `setupSharedTestFixture`
- `teardownSharedTestFixture`
- `setupTestClass`
- `teardownTestClass`
- `setupTestMethod`
- `teardownTestMethod`

`fatalAssertUsing(plugin,context,actual,constraint,diagnostic)` displays the diagnostic information, `diagnostic`, upon failure.

Input Arguments

`plugin` — Qualifying plugin instance
`matlab.unittest.plugins.QualifyingPlugin`

Plugin instance, specified as an instance of the `matlab.unittest.plugins.QualifyingPlugin` class.

`context` — Context for plugins
`matlab.unittest.plugins.plugindata.QualificationContext`

Context for plugins, specified as an instance of `matlab.unittest.plugins.plugindata.QualificationContext` class. This instance provides the context for the plugin to perform qualifications on test suites. The plugin obtains this context from the plugin data.

`actual` — Value to test
workspace variable

Value to test, specified as a workspace variable. `actual` can be any data type. The qualification passes when `actual` satisfies the specified constraint, `constraint`.

`constraint` — Condition test must satisfy
instance of class in `matlab.unittest.constraints` package

Condition the test must satisfy, specified as an instance of a class in the `matlab.unittest.constraints` package.

`diagnostic` — Diagnostic information to display
string | character vector | function handle | instance of class in `matlab.unittest.diagnostics` package

Diagnostic information to display upon failure, specified as a string, a character vector, a function handle, or an instance of a class in the `matlab.unittest.diagnostics` package.

Examples

Use Qualifications in Plugin

See examples for the QualifyingPlugin class and replace calls to `verifyUsing` with `fatalAssertUsing`.

Tips

Use the `QualifyingPlugin.fatalAssertUsing` method to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

- Use the `QualifyingPlugin.verifyUsing` method to produce and record failures without throwing an exception. Because a `QualifyingPlugin` performs additional qualifications beyond the ones defined in the unit tests, it typically uses verifications. Verifications do not cause an early exit from the test, ensuring that the test framework executes all test content. Use other qualification types to test for violation of preconditions or incorrect test setup.
- Use the `QualifyingPlugin.assumeUsing` method to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the associated test content as `Incomplete`.
- Use the `QualifyingPlugin.assertUsing` method when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the associated test content as failed and incomplete.

See Also

See Also

matlab.unittest.plugins.QualifyingPlugin

Introduced in R2015b

verifyUsing

Class: matlab.unittest.plugins.QualifyingPlugin
Package: matlab.unittest.plugins

Verify that value satisfies given constraint

Syntax

```
verifyUsing(plugin,context,actual,constraint)
verifyUsing(plugin,context,actual,constraint,diagnostic)
```

Description

`verifyUsing(plugin,context,actual,constraint)` verifies that `actual` is a value that satisfies the given constraint, `constraint`, using the qualification `context`. If the actual value does not satisfy the constraint, the testing framework reports a verification failure.

You can perform verifications in these `QualifyingPlugin` methods:

- `setupTestClass`
- `teardownTestClass`
- `setupTestMethod`
- `teardownTestMethod`

`verifyUsing(plugin,context,actual,constraint,diagnostic)` displays the diagnostic information, `diagnostic`, upon failure.

Input Arguments

`plugin` — Qualifying plugin instance
`matlab.unittest.plugins.QualifyingPlugin`

Plugin instance, specified as an instance of the `matlab.unittest.plugins.QualifyingPlugin` class.

`context` — Context for plugins
`matlab.unittest.plugins.plugindata.QualificationContext`

Context for plugins, specified as an instance of `matlab.unittest.plugins.plugindata.QualificationContext` class. This instance provides the context for the plugin to perform qualifications on test suites. The plugin obtains this context from the plugin data.

`actual` — Value to test
workspace variable

Value to test, specified as a workspace variable. `actual` can be any data type. The qualification passes when `actual` satisfies the specified constraint, `constraint`.

`constraint` — Condition test must satisfy
instance of class in `matlab.unittest.constraints` package

Condition the test must satisfy, specified as an instance of a class in the `matlab.unittest.constraints` package.

`diagnostic` — Diagnostic information to display
string | character vector | function handle | instance of class in `matlab.unittest.diagnostics` package

Diagnostic information to display upon failure, specified as a string, a character vector, a function handle, or an instance of a class in the `matlab.unittest.diagnostics` package.

Examples

Use Qualifications in Plugin

See examples for the QualifyingPlugin class.

Tips

Use the `QualifyingPlugin.verifyUsing` method to produce and record failures without throwing an exception. Because a `QualifyingPlugin` performs additional

qualifications beyond the ones defined in the unit tests, it typically uses verifications. Verifications do not cause an early exit from the test, ensuring that the test framework executes all test content. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

- Use the `QualifyingPlugin.assumeUsing` method to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`.
- Use the `QualifyingPlugin.assertUsing` method when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete.
- Use the `QualifyingPlugin.fatalAssertUsing` method to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session.

See Also

See Also

matlab.unittest.plugins.QualifyingPlugin

Introduced in R2015b

matlab.unittest.plugins.StopOnFailuresPlugin class

Package: matlab.unittest.plugins

Plugin to debug test failures

Description

The `StopOnFailuresPlugin` class provides a plugin to help debug test failures. Adding `StopOnFailuresPlugin` to the test runner pauses execution of a test if it encounters a qualification failure or uncaught error and puts MATLAB into debug mode.

If `StopOnFailuresPlugin` encounters a qualification failure or uncaught error in a test, you can use MATLAB debugging commands, such as `dpbup`, `dbstep`, `dbcont`, and `dbquit`, to investigate the cause of the test failure.

If `StopOnFailuresPlugin` encounters an uncaught error in a test, you cannot use `dbup` to shift context to the source of the error because the error disrupts the stack.

Construction

`matlab.unittest.plugins.StopOnFailuresPlugin` creates a plugin to debug test failures.

`matlab.unittest.plugins.StopOnFailuresPlugin('IncludingAssumptionFailures', tf)` indicates whether to react to assumption failures. By default, `StopOnFailuresPlugin` reacts to only uncaught errors and verification, assertion, and fatal assertion qualification errors. However, when `'IncludingAssumptionFailures'` is set to `true`, the plugin also reacts to assumption failures.

Input Arguments

`tf` — Indicator to react to assumption failures
FALSE (default) | TRUE

Indicator to react to assumption failures, specified as logical `false` or `true`. When this value is `true`, the test runner reacts to assumption failures. When the value is `false`, the plugin ignores assumption failures.

Properties

IncludeAssumptionFailures

When this property value is `true`, the instance reacts to assumption failures. When the value is `false`, the instance ignores assumption failures. The `IncludeAssumptionFailures` property is `false` by default. To specify the property as `true`, use the `IncludingAssumptionFailures` input when you construct the instance.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Add Plugin to TestRunner

In your working folder, create the file `ExampleTest.m` containing the following test class.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)  % Test fails
            act = 3.1416;
            exp = pi;
            testCase.verifyEqual(act, exp)
        end
        function testTwo(testCase)  % Test does not complete
            testCase.assumeEqual(5, 4)
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class and a test runner.

```
import matlab.unittest.TestRunner
import matlab.unittest.TestSuite
import matlab.unittest.plugins.StopOnFailuresPlugin
```

```
suite = TestSuite.fromClass(?ExampleTest);
runner = TestRunner.withTextOutput;
```

Run the tests.

```
result = runner.run(suite);
```

```
Running ExampleTest

================================================================================
Verification failed in ExampleTest/testOne.

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual        Expected               Error               RelativeError
                ______    _________________    ____________________    _________________

                3.1416    3.14159265358979    7.34641020683213e-06    2.33843499679617e

    Actual double:
           3.141600000000000
    Expected double:
           3.141592653589793

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 6
================================================================================
.
================================================================================
ExampleTest/testTwo was filtered.
    Details
================================================================================
.
Done ExampleTest
__________

Failure Summary:
```

```
 Name                 Failed  Incomplete  Reason(s)
===================================================================
 ExampleTest/testOne    X                 Failed by verification.
-------------------------------------------------------------------
 ExampleTest/testTwo              X       Filtered by assumption.
```

As a result of the qualifications in the test class, the first test fails, and the second test does not complete.

Add the `StopOnFailuresPlugin` to the runner and run the tests.

```
runner.addPlugin(StopOnFailuresPlugin)
result = runner.run(suite);
```

```
Running ExampleTest
Test execution paused due to failure. Either click here or execute DBUP to shift contex
```

During the test execution, when the failure occurs, MATLAB enters debug mode.

Click on the hyperlinked word `'here'` to shift debug context to your work source. If necessary, make the command window your current window.

```
In workspace belonging to ExampleTest>ExampleTest.testOne at 6
```

Examine the variables in the workspace.

```
whos
```

```
  Name          Size            Bytes  Class           Attributes

  act           1x1                 8  double
  exp           1x1                 8  double
  testCase      1x1               112  ExampleTest
```

Now, you can investigate the cause of the test failure.

For example, see if the test passes when you specify a relative tolerance of `100*eps`.

```
testCase.verifyEqual(act,exp,'RelTol',100*eps)
```

```
Verification failed in ExampleTest/testOne.

    ---------------------
    Framework Diagnostic:
    ---------------------
```

```
    verifyEqual failed.
    --> The values are not equal using "isequaln".
    --> The error was not within relative tolerance.
    --> Failure table:
                Actual        Expected               Error               RelativeError
                ______    _________________    ____________________    _________________

                3.1416    3.14159265358979    7.34641020683213e-06    2.33843499679617e

    Actual double:
           3.141600000000000
    Expected double:
           3.141592653589793

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 6
================================================================================
```

The test fails even with the specified tolerance.

Exit out of debug mode.

```
dbquit
```

```
================================================================================
Verification failed in ExampleTest/testOne.

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual        Expected               Error               RelativeError
                ______    _________________    ____________________    _________________

                3.1416    3.14159265358979    7.34641020683213e-06    2.33843499679617e

    Actual double:
           3.141600000000000
    Expected double:
           3.141592653589793
```

```
    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 6
================================================================================
.
================================================================================
ExampleTest/testTwo was filtered.
    Details
================================================================================
.
Done ExampleTest
__________

Failure Summary:

     Name                 Failed  Incomplete  Reason(s)
    ================================================================
     ExampleTest/testOne    X                 Failed by verification.
    ----------------------------------------------------------------
     ExampleTest/testTwo              X       Filtered by assumption.
```

To enter debug mode for tests that fail by assumption, such as `testTwo` in the `ExampleTest` class, include `'IncludingAssumptionFailures'` option for the plugin.

```
runner = TestRunner.withTextOutput;
runner.addPlugin(StopOnFailuresPlugin(...
    'IncludingAssumptionFailures', true))
```

If you run the test runner, you enter debug mode for both `testOne` and `testTwo`.

See Also

See Also

`dbcont` | `dbquit` | `dbstep` | `dbup` | `matlab.unittest.plugins`

Introduced in R2013b

matlab.unittest.plugins.TAPPlugin class

Package: matlab.unittest.plugins

Plugin that produces Test Anything Protocol stream

Description

The `TAPPlugin` creates a plugin that produces a Test Anything Protocol (TAP) stream. Using this plugin, you can integrate MATLAB Unit Test results into third-party systems that recognize the TAP protocol. For example, you can integrate test results with continuous integration systems like Jenkins™ or TeamCity®.

Construction

Instantiate a `TAPPlugin` using one of its static methods.

To produce output in the original TAP format (version 12), use the `producingOriginalFormat` static method. To produce output with TAP version 13 format, use the `producingVersion13` static method. TAP version 13 output includes test diagnostics in YAML blocks.

Methods

producingOriginalFormat	Construct TAPPlugin for original TAP format
producingVersion13	Construct TAPPlugin for version 13 TAP format

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.unittest.plugins.TestRunnerPlugin | matlab.unittest.plugins.ToFile | matlab.unittest.plugins.OutputStream

External Websites

Jenkins
TeamCity
testanything.org

Introduced in R2014a

matlab.unittest.plugins.TAPPlugin.producingOriginalFormat

Class: matlab.unittest.plugins.TAPPlugin
Package: matlab.unittest.plugins

Construct TAPPlugin for original TAP format

Syntax

```
matlab.unittest.plugins.TAPPlugin.producingOriginalFormat
matlab.unittest.plugins.TAPPlugin.producingOriginalFormat(stream)
matlab.unittest.plugins.TAPPlugin.producingOriginalFormat( ___ ,
Name,Value)
```

Description

`matlab.unittest.plugins.TAPPlugin.producingOriginalFormat` creates a plugin that produces output in the form of the original Test Anything Protocol (TAP) format (version 12). By default, the plugin uses the `ToStandardOutput` stream, and the output appears on the screen. In this case, other output sent to the screen can invalidate the TAP stream.

`matlab.unittest.plugins.TAPPlugin.producingOriginalFormat(stream)` redirects all the text output to a specified output stream. For example, you can redirect the output to the `ToFile` stream.

`matlab.unittest.plugins.TAPPlugin.producingOriginalFormat( ___ , Name,Value)` creates a plugin with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`stream` — Location where the plugin directs text output
`matlab.unittest.plugins.ToStandardOutput` (default) | instance of `matlab.unittest.plugins.OutputStream` class

Location where the plugin directs text output, specified as an instance of the `OutputStream` class. By default, the plugin uses the `ToStandardOutput` stream.

Example: `stream = matlab.unittest.plugins.ToStandardOutput`

Example: `stream = matlab.unittest.plugins.ToFile('myFile.tap')`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `TAPPlugin.producingOriginalFormat('Verbosity', Verbosity.Detailed)` creates a plugin that includes diagnostics logged at and below the `Detailed` level.

`'IncludingPassingDiagnostics'` — Indicator to record diagnostics from passing tests

`false` (default) | `true`

Whether to record diagnostics from passing tests, specified as `false` or `true`. By default the plugin does not record diagnostics from passing tests.

Data Types: `logical`

`'Verbosity'` — Verbosity levels recorded by plugin instance

1 (default) | 2 | 3 | 4 | `matlab.unittest.Verbosity` enumeration

Verbosity levels recorded by the plugin instance, specified as an integer value from 1 through 4, or as a `matlab.unittest.Verbosity` enumeration object. The plugin records diagnostics that are logged at this level and below. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration. By default the plugin records diagnostics logged at the `matlab.unittest.Verbosity.Terse` level.

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
1	`matlab.unittest.Verbosity.T`	Minimal information
2	`matlab.unittest.Verbosity.C`	Moderate amount of information

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
3	`matlab.unittest.Verbosity.D`	Some supplemental information
4	`matlab.unittest.Verbosity.V`	Lots of supplemental information

`'ExcludingLoggedDiagnostics'` — Indicator to exclude diagnostics from logged events
`false` (default) | `true`

Whether to exclude diagnostics from logged events, specified as `false` or `true`. By default the plugin does not record diagnostics from logged events.

Data Types: `logical`

Examples

Create TAP Plugin

In a new file in your working folder, create `ExampleTest.m` containing the following test class.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)  % Test fails
            testCase.verifyEqual(5,4,'Testing 5==4')
        end
        function testTwo(testCase)  % Test passes
            testCase.verifyEqual(5,5,'Testing 5==5')
        end
        function testThree(testCase)
            % test code
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class.

```
import matlab.unittest.TestRunner
import matlab.unittest.TestSuite
import matlab.unittest.plugins.TAPPlugin
```

```
import matlab.unittest.plugins.ToFile

suite   = TestSuite.fromClass(?ExampleTest);
```

Create a test runner that displays output to the command window using the default plugin.

```
runner = TestRunner.withTextOutput;
```

Create a `TAPPlugin` that sends output to the file `MyTapOutput.tap`.

```
tapFile = 'MyTAPOutput.tap';
plugin = TAPPlugin.producingOriginalFormat(ToFile(tapFile));
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin)
result = runner.run(suite);
```

```
Running ExampleTest

================================================================================
Verification failed in ExampleTest/testOne.

    ----------------
    Test Diagnostic:
    ----------------
    Testing 5==4

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                5         4           1        0.25

    Actual double:
             5
    Expected double:
             4
```

```
    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 4
================================================================================
...
Done ExampleTest
__________

Failure Summary:

     Name                 Failed  Incomplete  Reason(s)
    ================================================================
     ExampleTest/testOne    X                 Failed by verification.
```

Display the file created by the plugin.

```
disp(fileread(tapFile))
```

```
1..3
not ok 1 - ExampleTest/testOne
# ================================================================================
# Verification failed in ExampleTest/testOne.
#
#     ----------------
#     Test Diagnostic:
#     ----------------
#     Testing 5==4
#
#     ---------------------
#     Framework Diagnostic:
#     ---------------------
#     verifyEqual failed.
#     --> The values are not equal using "isequaln".
#     --> Failure table:
#                 Actual    Expected    Error    RelativeError
#                 ______    ________    _____    _____________
#
#                 5         4           1        0.25
#
#     Actual double:
#              5
#     Expected double:
#              4
#
```

```
#     ------------------
#     Stack Information:
#     ------------------
#     In C:\work\ExampleTest.m (ExampleTest.testOne) at 4
# ================================================================================
#
ok 2 - ExampleTest/testTwo
ok 3 - ExampleTest/testThree
```

You can use the `TAPPlugin` directed to standard output. However, any other text displayed to standard output (such as failed test information) interrupts the stream and has the potential to invalidate it.

See Also

See Also

matlab.unittest.plugins.TAPPlugin.producingVersion13 | matlab.unittest.plugins.ToFile | matlab.unittest.plugins.OutputStream

External Websites

testanything.org

Introduced in R2014a

matlab.unittest.plugins.TAPPlugin.producingVersion13

Class: matlab.unittest.plugins.TAPPlugin
Package: matlab.unittest.plugins

Construct TAPPlugin for version 13 TAP format

Syntax

```
matlab.unittest.plugins.TAPPlugin.producingVersion13
matlab.unittest.plugins.TAPPlugin.producingVersion13(stream)
matlab.unittest.plugins.TAPPlugin.producingVersion13( ___ ,Name,Value)
```

Description

`matlab.unittest.plugins.TAPPlugin.producingVersion13` creates a plugin that produces output in version 13 of the Test Anything Protocol (TAP) format. The TAP version 13 output includes test diagnostics in YAML blocks. By default, the plugin uses the `ToStandardOutput` stream, and the output appears on the screen. In this case, other output sent to the screen can invalidate the TAP stream.

`matlab.unittest.plugins.TAPPlugin.producingVersion13(stream)` redirects all the text output to a specified output stream. For example, you can redirect the output to the `ToFile` stream.

`matlab.unittest.plugins.TAPPlugin.producingVersion13( ___ ,Name,Value)` creates a plugin with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`stream` — Location where the plugin directs text output

`matlab.unittest.plugins.ToStandardOutput` (default) | instance of `matlab.unittest.plugins.OutputStream` class

Location where the plugin directs text output, specified as an instance of the `OutputStream` class. By default, the plugin uses the `ToStandardOutput` stream.

Example: `stream = matlab.unittest.plugins.ToStandardOutput`

Example: `stream = matlab.unittest.plugins.ToFile('myFile.tap')`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `TAPPlugin.producingVersion13('Verbosity', Verbosity.Detailed)` creates a plugin that includes diagnostics logged at and below the `Detailed` level.

`'IncludingPassingDiagnostics'` — Indicator to record diagnostics from passing tests
`false` (default) | `true`

Whether to record diagnostics from passing tests, specified as `false` or `true`. By default the plugin does not record diagnostics from passing tests.

Data Types: `logical`

`'Verbosity'` — Verbosity levels recorded by plugin instance
1 (default) | 2 | 3 | 4 | `matlab.unittest.Verbosity` enumeration

Verbosity levels recorded by the plugin instance, specified as an integer value from 1 through 4, or as a `matlab.unittest.Verbosity` enumeration object. The plugin records diagnostics that are logged at this level and below. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration. By default the plugin records diagnostics logged at the `matlab.unittest.Verbosity.Terse` level.

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
1	`matlab.unittest.Verbosity.T`	Minimal information
2	`matlab.unittest.Verbosity.C`	Moderate amount of information
3	`matlab.unittest.Verbosity.D`	Some supplemental information
4	`matlab.unittest.Verbosity.V`	Lots of supplemental information

`'ExcludingLoggedDiagnostics'` — Indicator to exclude diagnostics from logged events
`false` (default) | `true`

Whether to exclude diagnostics from logged events, specified as `false` or `true`. By default the plugin does not record diagnostics from logged events.

Data Types: `logical`

Examples

Create TAP Plugin

In a new file in your working folder, create `ExampleTest.m` containing the following test class.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)  % Test fails
            testCase.verifyEqual(5,4,'Testing 5==4')
        end
        function testTwo(testCase)  % Test passes
            testCase.verifyEqual(5,5,'Testing 5==5')
        end
        function testThree(testCase)
            % test code
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class.

```
import matlab.unittest.TestRunner
import matlab.unittest.TestSuite
import matlab.unittest.plugins.TAPPlugin
import matlab.unittest.plugins.ToFile

suite = TestSuite.fromClass(?ExampleTest);
```

Create a test runner that displays output to the command window using the default plugin.

```
runner = TestRunner.withTextOutput;
```

Create a `TAPPlugin` that sends output to the file `MyTapOutput.tap`.

```
tapFile = 'MyTAPOutput.tap';
plugin = TAPPlugin.producingVersion13(ToFile(tapFile));
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin)
result = runner.run(suite);
```

```
Running ExampleTest

================================================================================
Verification failed in ExampleTest/testOne.

    ----------------
    Test Diagnostic:
    ----------------
    Testing 5==4

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                5         4           1        0.25

    Actual double:
             5
    Expected double:
             4

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 4
================================================================================
...
Done ExampleTest
_________
```

```
Failure Summary:

     Name                 Failed  Incomplete  Reason(s)
    ================================================================
     ExampleTest/testOne    X                 Failed by verification.
```

Display the file created by the plugin.

```
disp(fileread(tapFile))
```

```
TAP version 13
1..3
not ok 1 - ExampleTest/testOne
    ---
    Event:
        Event Name: 'VerificationFailed'
        Event Location: 'ExampleTest/testOne'
        Test Diagnostic: |
            Testing 5==4
        Framework Diagnostic: |
            verifyEqual failed.
            --> The values are not equal using "isequaln".
            --> Failure table:
                    Actual    Expected    Error    RelativeError
                    ______    ________    _____    _____________

                    5         4           1        0.25

            Actual Value:
                 5
            Expected Value:
                 4
        Stack: |
            In C:\work\ExampleTest.m (ExampleTest.testOne) at 4
    ...
ok 2 - ExampleTest/testTwo
ok 3 - ExampleTest/testThree
```

You can use the `TAPPlugin` directed to standard output. However, any other text displayed to standard output (such as failed test information) interrupts the stream and has the potential to invalidate it.

See Also

See Also

matlab.unittest.plugins.TAPPlugin.producingVersion13 | matlab.unittest.plugins.ToFile | matlab.unittest.plugins.OutputStream

External Websites

testanything.org
yaml.org

Introduced in R2016b

matlab.unittest.plugins.ToFile class

Package: matlab.unittest.plugins
Superclasses: matlab.unittest.plugins.OutputStream

Output stream to write text output to file

Description

The `ToFile` class creates an output stream that writes text output to a UTF-8 encoded file. Whenever text prints to this stream, the output stream opens the file, appends the text, and closes the file.

Construction

`matlab.unittest.plugins.ToFile(fname)` creates an `OutputStream` that writes text output to the file, `fname`.

Input Arguments

`fname`

Name of file to write the output text, specified as a character vector or string scalar. If `fname` exists, the text from the stream is appended to the file.

Properties

`Filename`

Name of file to redirect text output from the plugin, specified in the input argument, `fname`.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Direct TAPPlugin Output Text to Separate File

In your working folder, create the file `ExampleTest.m` containing the following test class.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)  % Test fails
            testCase.verifyEqual(5, 4, 'Testing 5==4')
        end
        function testTwo(testCase)  % Test passes
            testCase.verifyEqual(5, 5, 'Testing 5==5')
        end
        function testThree(testCase)
            % test code
        end
    end
end
```

The `verifyEqual` qualification in `testOne` causes a test failure.
The qualifications in `testOne` and `testTwo` include an instance of a `matlab.unittest.diagnostics.StringDiagnostic`.

At the command prompt, create a test suite from the `ExampleTest` class.

```
import matlab.unittest.TestRunner
import matlab.unittest.TestSuite
import matlab.unittest.plugins.TAPPlugin
import matlab.unittest.plugins.ToFile

suite   = TestSuite.fromClass(?ExampleTest);
```

Create a test runner that displays output to the command window.

```
runner = TestRunner.withTextOutput;
```

Create a `TAPPlugin` that explicitly specifies that its output should go to the file, `MyTapOutput.tap`.

```
filename = 'MyTapOutput.tap';
plugin = TAPPlugin.producingOriginalFormat(ToFile(filename));
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin)
result = runner.run(suite);
```

```
Running ExampleTest

================================================================================
Verification failed in ExampleTest/testOne.

    ----------------
    Test Diagnostic:
    ----------------
    Testing 5==4

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                5         4           1        0.25

    Actual double:
             5
    Expected double:
             4

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 4
================================================================================
...
Done ExampleTest
_________

Failure Summary:

     Name                 Failed  Incomplete  Reason(s)
    ===============================================================
     ExampleTest/testOne    X                 Failed by verification.
```

Only the test failures produce output to the screen. By default, `TestRunner.withTextOutput` uses a `FailureDiagnosticsPlugin` to display output on the screen.

Observe contents in the file created by the plugin.

```
disp(fileread(filename))
```

```
1..3
not ok 1 - ExampleTest/testOne
# ================================================================================
# Verification failed in ExampleTest/testOne.
#
#     ----------------
#     Test Diagnostic:
#     ----------------
#     Testing 5==4
#
#     ----------------------
#     Framework Diagnostic:
#     ----------------------
#     verifyEqual failed.
#     --> The values are not equal using "isequaln".
#     --> Failure table:
#                 Actual    Expected    Error    RelativeError
#                 ______    ________    _____    _____________
#
#                 5         4           1        0.25
#
#     Actual double:
#              5
#     Expected double:
#              4
#
#     ------------------
#     Stack Information:
#     ------------------
#     In C:\work\ExampleTest.m (ExampleTest.testOne) at 4
# ================================================================================
#
ok 2 - ExampleTest/testTwo
```

```
ok 3 - ExampleTest/testThree
```

See Also

See Also

matlab.unittest.plugins.OutputStream | `fopen` | `fprintf` | `matlab.unittest.plugins`

Introduced in R2014a

matlab.unittest.plugins.ToStandardOutput class

Package: matlab.unittest.plugins
Superclasses: matlab.unittest.plugins.OutputStream

Output stream to display text information to screen

Description

The `ToStandardOutput` class creates an output stream to display text output to the screen. Many plugins that accept an output stream use `ToStandardOutput` as their default stream.

Construction

`matlab.unittest.plugins.ToStandardOutput` creates an `OutputStream` that prints text output to the screen.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Direct Plugin Output Text to Standard Output

In your working folder, create the file `ExampleTest.m` containing the following test class.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)  % Test fails
            testCase.verifyEqual(5, 4, 'Testing 5==4')
        end
```

```
        function testTwo(testCase)  % Test passes
            testCase.verifyEqual(5, 5, 'Testing 5==5')
        end
        function testThree(testCase)
            % test code
        end
    end
end
```

The `verifyEqual` qualification in `testOne` causes a test failure. The qualifications in `testOne` and `testTwo` include an instance of a `matlab.unittest.diagnostics.StringDiagnostic`.

At the command prompt, create a test suite from the `ExampleTest` class.

```
import matlab.unittest.TestRunner
import matlab.unittest.TestSuite
import matlab.unittest.plugins.FailureDiagnosticsPlugin
import matlab.unittest.plugins.ToStandardOutput

suite   = TestSuite.fromClass(?ExampleTest);
```

Create a test runner with no plugins. This code creates a silent runner and provides you with complete control over the installed plugins.

```
runner = TestRunner.withNoPlugins;
```

Create a `FailureDiagnosticsPlugin` that explicitly specifies that its output should go to the screen.

```
plugin = FailureDiagnosticsPlugin(ToStandardOutput);
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin)
result = runner.run(suite);
```

```
================================================================================
Verification failed in ExampleTest/testOne.

    ----------------
    Test Diagnostic:
    ----------------
    Testing 5==4
```

```
    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual failed.
    --> The values are not equal using "isequaln".
    --> Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                5         4           1        0.25

    Actual double:
             5
    Expected double:
             4

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 4
================================================================================
Failure Summary:

     Name                 Failed  Incomplete  Reason(s)
    ================================================================
     ExampleTest/testOne    X                 Failed by verification.
```

Only the test failures produce output to the screen.

See Also

See Also

matlab.unittest.plugins.OutputStream | `fprintf` | `matlab.unittest.plugins`

Introduced in R2014a

matlab.unittest.plugins.testreport

Summary of classes in MATLAB Plugin Test Report Generation

Description

The `testreport` classes create plugins to generate test result reports. The `matlab.unittest.plugins.testreport` package consists of the following MATLAB classes.

matlab.unittest.plugins.testreport.DOCXTestReportPlugin	`TestReportPlugin` that creates a test report in `.docx` format
matlab.unittest.plugins.testreport.PDFTestReportPlugin	`TestReportPlugin` that creates a test report in `.pdf` format

See Also

See Also

`matlab.unittest.plugins` | TestReportPlugin

matlab.unittest.plugins.testreport.DOCXTestReportPlugin class

Package: matlab.unittest.plugins.testreport
Superclasses: matlab.unittest.plugins.TestReportPlugin

`TestReportPlugin` that creates a test report in `.docx` format

Description

A `DOCXTestReportPlugin` is an instance of the `TestReportPlugin` class that creates a test result report in `.docx` format. To create a `DOCXTestReportPlugin` instance, use the matlab.unittest.plugins.TestReportPlugin.producingDOCX static method.

Properties

`PageOrientation` — Report orientation

`'portrait'` (default) | `'landscape'`

Report orientation, specified as `'portrait'` or `'landscape'`. This property is read only. You can specify it during plugin construction.

These properties are inherited from `matlab.unittest.plugins.TestReportPlugin`:

`ExcludeLoggedDiagnostics` — Whether to exclude diagnostics from logged events

`false` (default) | `true`

Whether to exclude diagnostics from logged events from the report, specified as `false` or `true` (`logical` 0 or 1). This property is read only. You can specify it as `true` during plugin construction.

`IncludeCommandWindowText` — Whether to include text output from the Command Window

`false` (default) | `true`

Whether to include the text output from the Command Window in the report, specified as `false` or `true` (`logical` 0 or 1). This property is read only. You can specify it as `true` during plugin construction.

`IncludePassingDiagnostics` — Whether to record events from passing events
`false` (default) | `true`

Whether to include diagnostics from passing events in the report, specified as `false` or `true` (`logical` 0 or 1). This property is read only. You can specify it as `true` during plugin construction.

`Verbosity` — Verbosity levels recorded by plugin
`matlab.unittest.Verbosity.Terse` (default) | array of `matlab.unittest.Verbosity` enumeration instances

Verbosity levels recorded by the plugin, specified as an array of `matlab.unittest.Verbosity` enumeration instances. The plugin records diagnostics that are logged at this level and below. This property is read only. You can specify it during plugin construction.

Example: `[Terse Concise Detailed]`

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.unittest.plugins.TestReportPlugin | matlab.unittest.plugins.TestReportPlugin.producingDOCX

Introduced in R2016b

matlab.unittest.plugins.testreport.PDFTestReportPlugin class

Package: matlab.unittest.plugins.testreport
Superclasses: matlab.unittest.plugins.TestReportPlugin

`TestReportPlugin` that creates a test report in `.pdf` format

Description

A `PDFTestReportPlugin` is an instance of the `TestReportPlugin` class that creates a test result report in `PDF` format. To create a `PDFTestReportPlugin` instance, use the matlab.unittest.plugins.TestReportPlugin.producingPDF static method.

Properties

`PageOrientation` — Report orientation

`'portrait'` (default) | `'landscape'`

Report orientation, specified as `'portrait'` or `'landscape'`. This property is read only. You can specify it during plugin construction.

These properties are inherited from `matlab.unittest.plugins.TestReportPlugin`:

`ExcludeLoggedDiagnostics` — Whether to exclude diagnostics from logged events

`false` (default) | `true`

Whether to exclude diagnostics from logged events from the report, specified as `false` or `true` (`logical` 0 or 1). This property is read only. You can specify it as `true` during plugin construction.

`IncludeCommandWindowText` — Whether to include text output from the Command Window

`false` (default) | `true`

Whether to include the text output from the Command Window in the report, specified as `false` or `true` (`logical` 0 or 1). This property is read only. You can specify it as `true` during plugin construction.

`IncludePassingDiagnostics` — Whether to record events from passing events
`false` (default) | `true`

Whether to include diagnostics from passing events in the report, specified as `false` or `true` (`logical` 0 or 1). This property is read only. You can specify it as `true` during plugin construction.

`Verbosity` — Verbosity levels recorded by plugin
`matlab.unittest.Verbosity.Terse` (default) | array of `matlab.unittest.Verbosity` enumeration instances

Verbosity levels recorded by the plugin, specified as an array of `matlab.unittest.Verbosity` enumeration instances. The plugin records diagnostics that are logged at this level and below. This property is read only. You can specify it during plugin construction.

Example: `[Terse Concise Detailed]`

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Tips

- PDF test reports are generated based on your system locale and the font families installed on your machine. When generating a report with a non-English locale, unless your machine has the Noto Sans CJK font families installed, the report may have pound sign characters (#) in place of Chinese, Japanese, and Korean characters.

See Also

See Also

matlab.unittest.plugins.TestReportPlugin | matlab.unittest.plugins.TestReportPlugin.producingPDF

Introduced in R2016b

matlab.unittest.plugins.TestReportPlugin class

Package: matlab.unittest.plugins

Plugin that produces a test result report

Description

`TestReportPlugin` creates a plugin that directs the `TestRunner` to produce a test result report. Using this plugin, you can produce readable and archivable test reports.

Construction

Instantiate a `TestReportPlugin` using one of its static methods:

- To produce a `.docx` report, use the `producingDOCX` static method.
- To produce a `PDF` report, use the `producingPDF` static method.

Properties

`ExcludeLoggedDiagnostics` — Whether to exclude diagnostics from logged events
`false` (default) | `true`

Whether to exclude diagnostics from logged events from the report, specified as `false` or `true` (`logical` 0 or 1). This property is read only. You can specify it as `true` during plugin construction.

`IncludeCommandWindowText` — Whether to include text output from the Command Window
`false` (default) | `true`

Whether to include the text output from the Command Window in the report, specified as `false` or `true` (`logical` 0 or 1). This property is read only. You can specify it as `true` during plugin construction.

`IncludePassingDiagnostics` — Whether to record events from passing events
`false` (default) | `true`

Whether to include diagnostics from passing events in the report, specified as `false` or `true` (`logical` 0 or 1). This property is read only. You can specify it as `true` during plugin construction.

`Verbosity` — Verbosity levels recorded by plugin
`matlab.unittest.Verbosity.Terse` (default) | array of `matlab.unittest.Verbosity` enumeration instances

Verbosity levels recorded by the plugin, specified as an array of `matlab.unittest.Verbosity` enumeration instances. The plugin records diagnostics that are logged at this level and below. This property is read only. You can specify it during plugin construction.

Example: `[Terse Concise Detailed]`

Methods

producingDOCX	Constructs plugin that produces `.docx` report
producingPDF	Constructs plugin that produces `.pdf` report

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Generate Test Result Report in `.docx` Format

Create a test suite from two test files, run the suite, and generate a `.docx` report of the results.

Create a new file in your working folder named `ScriptBasedTest.m` containing the following test script. The script includes two failing and incomplete tests.

```
%% Test double class
```

```
expSolution = 'double';
actSolution = ones;
assert(isa(actSolution,expSolution))

%% Test single class
expSolution = 'single';
actSolution = ones('single');
assert(isa(actSolution,expSolution))

%% Test uint16 class
expSolution = 'uint16';
actSolution = ones('uint16');
assert(isa(actSolution,expSolution))

%% Test that fails
assert(false==true);

%% Another test that fails
assert(strcmp('correlation','causation'))
```

Create a file named `ClassBasedTest.m` containing the following test class. The class includes a failing test that, with parameterization, results in nine failed test results.

```
classdef ClassBasedTest < matlab.unittest.TestCase
    properties (ClassSetupParameter)
        generator = {'twister','combRecursive','multFibonacci'};
    end
    properties (MethodSetupParameter)
        seed = {0,123,4294967295};
    end
    properties (TestParameter)
        dim1 = struct('small',1,'medium',2,'large',3);
        dim2 = struct('small',2,'medium',3,'large',4);
        dim3 = struct('small',3,'medium',4,'large',5);
        type = {'single','double'};
    end
    methods (TestClassSetup)
        function ClassSetup(testCase,generator)
            orig = rng;
            testCase.addTeardown(@rng,orig)
            rng(0, generator)
        end
    end
    methods (TestMethodSetup)
        function MethodSetup(testCase,seed)
```

```
            orig = rng;
            testCase.addTeardown(@rng,orig)
            rng(seed)
        end
    end
    methods (Test, ParameterCombination='sequential')
        function testSize(testCase,dim1,dim2,dim3)
            testCase.verifySize(rand(dim1,dim2,dim3),[dim1 dim2 dim3])
        end
    end
    methods (Test, ParameterCombination='pairwise')
        function testRepeatable(testCase,dim1,dim2,dim3)
            state = rng;
            firstRun = rand(dim1,dim2,dim3);
            rng(state)
            secondRun = rand(dim1,dim2,dim3);
            testCase.verifyEqual(firstRun,secondRun);
        end
    end
    methods (Test)
        function testClass(testCase,dim1,dim2,type)
            testCase.verifyClass(rand(dim1,dim2,type),type)
        end
    end
end
```

At the command prompt, create a test suite from both test files.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
import matlab.unittest.plugins.TestReportPlugin;

suite = testsuite({'ScriptBasedTest','ClassBasedTest'})
```

```
suite =

  1×284 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags
```

```
Tests Include:
   17 Unique Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

Create a silent test runner, so that there is no information output to the command window. Create a `TestReportPlugin` that sends output to the file `MyTestReport.docx`.

```
runner = TestRunner.withNoPlugins;
docxFile = 'MyTestReport.docx';
plugin = TestReportPlugin.producingDOCX(docxFile);
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin);
result = runner.run(suite)
```

```
Generating report. Please wait.
    Preparing content for the report.
    Adding content to the report.
    Writing report to file.
Report has been saved to: C:\work\MyTestReport.docx

result =

  1×284 TestResult array with properties:

    Name
    Passed
    Failed
    Incomplete
    Duration
    Details

Totals:
   282 Passed, 2 Failed, 2 Incomplete.
   0.73477 seconds testing time.
```

Open the test report.

```
open(docxFile)
```

Generate `.pdf` Report That Includes Passing Diagnostics

Create a test suite from a function-based test, run the suite, and generate a report of the results. Include passing diagnostics and the text output to the Command Window.

Create a new file in your working folder named `FunctionBasedTest.m` containing the following function-based test. The test file includes two failing tests.

```
%% Main function to generate tests
function tests = FunctionBasedTest
tests = functiontests(localfunctions);
end

%% Test Functions
function passingTest(testCase)
actSolution = 13*3+7*5;
expSolution = 74;
verifyEqual(testCase,actSolution,expSolution)
end

function failingTest(testCase)
actSolution = single(1);
verifyTrue(testCase,actSolution)
end

function anotherPassingTest(testCase)
verifyClass(testCase,string('some text'),'string')
end

function anotherFailingTest(testCase)
verifyTrue(testCase,strcmp('42','everything'))
end
```

At the command prompt, create a test suite from `FunctionBasedTest.m`. Create a test runner that displays output to the command window using the default plugin.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
import matlab.unittest.plugins.TestReportPlugin;

suite = testsuite('FunctionBasedTest');
runner = TestRunner.withTextOutput;
```

Create a `TestReportPlugin` that sends output to the file `MyTestReport2.pdf`. Include passing diagnostics and text output from the Command Window in the report.

```
pdfFile = 'MyTestReport2.pdf';
plugin = TestReportPlugin.producingPDF(pdfFile,...
    'IncludingPassingDiagnostics',true,'IncludingCommandWindowText',true);
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin);
result = runner.run(suite);
```

```
Running FunctionBasedTest
.
================================================================================
Verification failed in FunctionBasedTest/failingTest.

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyTrue failed.
    --> The value must be logical. It is of type "single".

    Actual single:
             1

    ------------------
    Stack Information:
    ------------------
    In C:\Work\FunctionBasedTest.m (failingTest) at 15
================================================================================
..
================================================================================
Verification failed in FunctionBasedTest/anotherFailingTest.

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyTrue failed.
    --> The value must evaluate to "true".

    Actual logical:
           0

    ------------------
    Stack Information:
    ------------------
    In C:\Work\FunctionBasedTest.m (anotherFailingTest) at 23
================================================================================
.
Done FunctionBasedTest
_________
```

```
Failure Summary:

     Name                                  Failed  Incomplete  Reason(s)
    ==================================================================================
     FunctionBasedTest/failingTest           X                 Failed by verification.
    ----------------------------------------------------------------------------------
     FunctionBasedTest/anotherFailingTest    X                 Failed by verification.

Generating report. Please wait.
    Preparing content for the report.
    Adding content to the report.
    Writing report to file.
Report has been saved to: C:\Work\MyTestReport2.pdf
```

Open the test report.

```
open(pdfFile)
```

Create Test Report That Includes Artifacts

In a file in your current working folder, create the `FigurePropTest` test class. If the `failingTest` test method fails (it always does in this example), it uses a `FigureDiagnostic` to save the figure so you can examine it later.

```
classdef FigurePropTest < matlab.unittest.TestCase
    properties
        TestFigure
    end
    methods(TestMethodSetup)
        function createFigure(testCase)
            testCase.TestFigure = figure;
        end
    end
    methods(TestMethodTeardown)
        function closeFigure(testCase)
            close(testCase.TestFigure)
        end
    end
    methods(Test)
        function defaultCurrentPoint(testCase)
            cp = testCase.TestFigure.CurrentPoint;
            testCase.verifyEqual(cp,[0 0], ...
                'Default current point is incorrect')
```

```
        end
        function defaultCurrentObject(testCase)
            import matlab.unittest.constraints.IsEmpty
            co = testCase.TestFigure.CurrentObject;
            testCase.verifyThat(co,IsEmpty, ...
                'Default current object should be empty')
        end
        function failingTest(testCase)
            import matlab.unittest.diagnostics.FigureDiagnostic
            fig = testCase.TestFigure;
            ax = axes(fig);
            surf(ax,peaks)
            testCase.verifyEmpty(testCase.TestFigure.Children, ...
                FigureDiagnostic(testCase.TestFigure))
        end
    end
end
```

At the command prompt, create a test suite.

```
suite = testsuite('FigurePropTest');
```

Create a silent test runner that records diagnostics and generates a PDF report.

```
import matlab.unittest.plugins.DiagnosticsRecordingPlugin
import matlab.unittest.plugins.TestReportPlugin
runner = matlab.unittest.TestRunner.withNoPlugins;
runner.addPlugin(DiagnosticsRecordingPlugin);
runner.addPlugin(TestReportPlugin.producingPDF('MyTestReport.pdf'));
```

Change the default artifact root to your current working folder.

```
runner.ArtifactsRootFolder = pwd;
```

Run the tests. The third test fails.

```
results = runner.run(suite)
```

```
Generating report. Please wait.
    Preparing content for the report.
    Adding content to the report.
    Writing report to file.
Report has been saved to: C:\work\MyTestReport.pdf
```

```
results =

  1×3 TestResult array with properties:

    Name
    Passed
    Failed
    Incomplete
    Duration
    Details

Totals:
   2 Passed, 1 Failed, 0 Incomplete.
   1.2295 seconds testing time.
```

Display the test diagnostic results for the third test. The test framework saved two artifacts related to the third test. By default, a `FigureDiagnostic` object saves a figure as both a PNG file and a FIG file.

```
results(3).Details.DiagnosticRecord.TestDiagnosticResults
```

```
ans =

  DiagnosticResult with properties:

         Artifacts: [1×2 matlab.unittest.diagnostics.FileArtifact]
    DiagnosticText: 'Figure saved to:↵--> C:\work\715b5416-5c52-4a53-bbec-837a5db57392'
```

Display the stored location of the first artifact.

```
results(3).Details.DiagnosticRecord.TestDiagnosticResults.Artifacts(1)
```

```
ans =

  FileArtifact with properties:

        Name: "Figure_284d9501-2121-45a1-bf5c-18904ce11e8f.fig"
    Location: "C:\work\715b5416-5c52-4a53-bbec-837a5db57392"
    FullPath: "C:\work\715b5416-5c52-4a53-bbec-837a5db57392\Figure_284d9501-2121-45a1-b
```

To inspect the image related to the failed test, open the file at the location shown in the `FullPath` field. Additionally, since you generated a PDF test report, the image is captured in `MyTestReport.pdf`. The test report also contains the path to the artifacts.

See Also

See Also

matlab.unittest.plugins.testreport.DOCXTestReportPlugin | matlab.unittest.plugins.testreport.PDFTestReportPlugin

Introduced in R2016b

matlab.unittest.plugins.TestReportPlugin.producingDOCX

Class: matlab.unittest.plugins.TestReportPlugin
Package: matlab.unittest.plugins

Constructs plugin that produces `.docx` report

Syntax

```
matlab.unittest.plugins.TestReportPlugin.producingDOCX(docxFile)
matlab.unittest.plugins.TestReportPlugin.producingDOCX(docxFile,
Name,Value)
```

Description

`matlab.unittest.plugins.TestReportPlugin.producingDOCX(docxFile)` constructs a plugin that produces a `.docx` report of test results.

`matlab.unittest.plugins.TestReportPlugin.producingDOCX(docxFile, Name,Value)` constructs a plugin with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`docxFile` — Name of test report
character vector ending in `.docx`

Name of the test report that the plugin creates, specified as a character vector ending in `.docx`.

Example: `'myReportFile.docx'`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example:
`TestReportPlugin.producingDOCX(docxFile,'Verbosity',Verbosity.Detailed)` creates a plugin that includes diagnostics logged at and below the `Detailed` level.

`'PageOrientation'` — Report orientation
`'portrait'` (default) | `'landscape'`

Report orientation, specified as `'portrait'` or `'landscape'`. By default the plugin produces a report with portrait orientation.

`'ExcludingLoggedDiagnostics'` — Indicator to exclude diagnostics from logged events
`false` (default) | `true`

Whether to exclude diagnostics from logged events, specified as `false` or `true`.

Data Types: `logical`

`'IncludingCommandWindowText'` — Indicator to include the text output from the Command Window in the report
`false` (default) | `true`

Whether to include the text output from the Command Window in the report, specified as `false` or `true`.

Data Types: `logical`

`'IncludingPassingDiagnostics'` — Indicator to record diagnostics from passing events
`false` (default) | `true`

Whether to record diagnostics from passing events, specified as `false` or `true`.

Data Types: `logical`

`'Verbosity'` — Verbosity levels recorded by plugin instance
1 (default) | 2 | 3 | 4 | `matlab.unittest.Verbosity` enumeration

Verbosity levels recorded by the plugin instance, specified as an integer value from 1 through 4, or as a `matlab.unittest.Verbosity` enumeration object. The plugin records diagnostics that are logged at this level and below. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration. By default the plugin records diagnostics logged at the `matlab.unittest.Verbosity.Terse` level.

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
1	`matlab.unittest.Verbosity.T`	Minimal information
2	`matlab.unittest.Verbosity.C`	Moderate amount of information
3	`matlab.unittest.Verbosity.D`	Some supplemental information
4	`matlab.unittest.Verbosity.V`	Lots of supplemental information

Examples

Generate Test Result Report in `.docx` Format

Create a test suite from two test files, run the suite, and generate a `.docx` report of the results.

Create a new file in your working folder named `ScriptBasedTest.m` containing the following test script. The script includes two failing and incomplete tests.

```
%% Test double class
expSolution = 'double';
actSolution = ones;
assert(isa(actSolution,expSolution))

%% Test single class
expSolution = 'single';
actSolution = ones('single');
assert(isa(actSolution,expSolution))

%% Test uint16 class
expSolution = 'uint16';
actSolution = ones('uint16');
assert(isa(actSolution,expSolution))

%% Test that fails
assert(false==true);

%% Another test that fails
```

```
assert(strcmp('correlation','causation'))
```

Create a file named `ClassBasedTest.m` containing the following test class. The class includes a failing test that, with parameterization, results in nine failed test results.

```
classdef ClassBasedTest < matlab.unittest.TestCase
    properties (ClassSetupParameter)
        generator = {'twister','combRecursive','multFibonacci'};
    end
    properties (MethodSetupParameter)
        seed = {0,123,4294967295};
    end
    properties (TestParameter)
        dim1 = struct('small',1,'medium',2,'large',3);
        dim2 = struct('small',2,'medium',3,'large',4);
        dim3 = struct('small',3,'medium',4,'large',5);
        type = {'single','double'};
    end
    methods (TestClassSetup)
        function ClassSetup(testCase,generator)
            orig = rng;
            testCase.addTeardown(@rng,orig)
            rng(0, generator)
        end
    end
    methods (TestMethodSetup)
        function MethodSetup(testCase,seed)
            orig = rng;
            testCase.addTeardown(@rng,orig)
            rng(seed)
        end
    end
    methods (Test, ParameterCombination='sequential')
        function testSize(testCase,dim1,dim2,dim3)
            testCase.verifySize(rand(dim1,dim2,dim3),[dim1 dim2 dim3])
        end
    end
    methods (Test, ParameterCombination='pairwise')
        function testRepeatable(testCase,dim1,dim2,dim3)
            state = rng;
            firstRun = rand(dim1,dim2,dim3);
            rng(state)
            secondRun = rand(dim1,dim2,dim3);
            testCase.verifyEqual(firstRun,secondRun);
        end
```

```
    end
    methods (Test)
        function testClass(testCase,dim1,dim2,type)
            testCase.verifyClass(rand(dim1,dim2,type),type)
        end
    end
end
```

At the command prompt, create a test suite from both test files.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
import matlab.unittest.plugins.TestReportPlugin;

suite = testsuite({'ScriptBasedTest','ClassBasedTest'})
```

```
suite =

  1×284 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   17 Unique Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

Create a silent test runner, so that there is no information output to the command window. Create a `TestReportPlugin` that sends output to the file `MyTestReport.docx`.

```
runner = TestRunner.withNoPlugins;
docxFile = 'MyTestReport.docx';
plugin = TestReportPlugin.producingDOCX(docxFile);
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin);
result = runner.run(suite)
```

```
Generating report. Please wait.
    Preparing content for the report.
```

```
    Adding content to the report.
    Writing report to file.
Report has been saved to: C:\work\MyTestReport.docx

result =

  1×284 TestResult array with properties:

    Name
    Passed
    Failed
    Incomplete
    Duration
    Details

Totals:
   282 Passed, 2 Failed, 2 Incomplete.
   0.73477 seconds testing time.
```

Open the test report.

```
open(docxFile)
```

Generate `.docx` Report That Includes Passing Diagnostics

Create a test suite from a function-based test, run the suite, and generate a report of the results. Include passing diagnostics and the text output to the Command Window.

Create a new file in your working folder named `FunctionBasedTest.m` containing the following function-based test. The test file includes two failing tests.

```
%% Main function to generate tests
function tests = FunctionBasedTest
tests = functiontests(localfunctions);
end

%% Test Functions
function passingTest(testCase)
actSolution = 13*3+7*5;
expSolution = 74;
verifyEqual(testCase,actSolution,expSolution)
end

function failingTest(testCase)
actSolution = single(1);
```

```
verifyTrue(testCase,actSolution)
end

function anotherPassingTest(testCase)
verifyClass(testCase,string('some text'),'string')
end

function anotherFailingTest(testCase)
verifyTrue(testCase,strcmp('42','everything'))
end
```

At the command prompt, create a test suite from `FunctionBasedTest.m`. Create a test runner that displays output to the command window using the default plugin.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
import matlab.unittest.plugins.TestReportPlugin;

suite = testsuite('FunctionBasedTest');
runner = TestRunner.withTextOutput;
```

Create a `TestReportPlugin` that sends output to the file `MyTestReport2.docx`. Include passing diagnostics and text output from the Command Window in the report.

```
docxFile = 'MyTestReport2.docx';
plugin = TestReportPlugin.producingDOCX(docxFile,...
    'IncludingPassingDiagnostics',true,'IncludingCommandWindowText',true);
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin);
result = runner.run(suite);
```

```
Running FunctionBasedTest
.
================================================================================
Verification failed in FunctionBasedTest/failingTest.

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyTrue failed.
    --> The value must be logical. It is of type "single".

    Actual single:
```

```
             1

    ------------------
    Stack Information:
    ------------------
    In C:\Work\FunctionBasedTest.m (failingTest) at 15
================================================================================
..
================================================================================
Verification failed in FunctionBasedTest/anotherFailingTest.

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyTrue failed.
    --> The value must evaluate to "true".

    Actual logical:
           0

    ------------------
    Stack Information:
    ------------------
    In C:\Work\FunctionBasedTest.m (anotherFailingTest) at 23
================================================================================
.
Done FunctionBasedTest
_________

Failure Summary:

     Name                                   Failed  Incomplete  Reason(s)
    ===========================================================================
     FunctionBasedTest/failingTest           X                  Failed by verification.
    ---------------------------------------------------------------------------
     FunctionBasedTest/anotherFailingTest    X                  Failed by verification.

Generating report. Please wait.
    Preparing content for the report.
    Adding content to the report.
    Writing report to file.
Report has been saved to: C:\Work\MyTestReport2.docx
```

Open the test report.

```
open(docxFile)
```

See Also

See Also

matlab.unittest.plugins.testreport.DOCXTestReportPlugin

Introduced in R2016b

matlab.unittest.plugins.TestReportPlugin.producingPDF

Class: matlab.unittest.plugins.TestReportPlugin
Package: matlab.unittest.plugins

Constructs plugin that produces `.pdf` report

Syntax

```
matlab.unittest.plugins.TestReportPlugin.producingPDF(pdfFile)
matlab.unittest.plugins.TestReportPlugin.producingPDF(pdfFile,
Name,Value)
```

Description

`matlab.unittest.plugins.TestReportPlugin.producingPDF(pdfFile)` constructs a plugin that produces a `PDF` report of test results.

`matlab.unittest.plugins.TestReportPlugin.producingPDF(pdfFile, Name,Value)` constructs a plugin with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`pdfFile` — Name of test report
character vector ending in `.pdf`

Name of the test report that the plugin creates, specified as a character vector ending in `.pdf`.

Example: `pdfFile = 'myReportFile.pdf'`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example:
`TestReportPlugin.producingPDF(pdfFile,'PageOrientation','landscape')` creates a plugin that generates a report in landscape orientation.

`'PageOrientation'` — Report orientation
`'portrait'` (default) | `'landscape'`

Report orientation, specified as `'portrait'` or `'landscape'`. By default the plugin produces a report with portrait orientation.

`'ExcludingLoggedDiagnostics'` — Indicator to exclude diagnostics from logged events
`false` (default) | `true`

Whether to exclude diagnostics from logged events, specified as `false` or `true`.

Data Types: `logical`

`'IncludingCommandWindowText'` — Indicator to include the text output from the Command Window in the report
`false` (default) | `true`

Whether to include the text output from the Command Window in the report, specified as `false` or `true`.

Data Types: `logical`

`'IncludingPassingDiagnostics'` — Indicator to record diagnostics from passing events
`false` (default) | `true`

Whether to record diagnostics from passing events, specified as `false` or `true`.

Data Types: `logical`

`'Verbosity'` — Verbosity levels recorded by plugin instance
1 (default) | 2 | 3 | 4 | `matlab.unittest.Verbosity` enumeration

Verbosity levels recorded by the plugin instance, specified as an integer value from 1 through 4, or as a `matlab.unittest.Verbosity` enumeration object. The plugin records diagnostics that are logged at this level and below. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration. By default the plugin records diagnostics logged at the `matlab.unittest.Verbosity.Terse` level.

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
1	`matlab.unittest.Verbosity.T`	Minimal information
2	`matlab.unittest.Verbosity.C`	Moderate amount of information
3	`matlab.unittest.Verbosity.D`	Some supplemental information
4	`matlab.unittest.Verbosity.V`	Lots of supplemental information

Examples

Generate Test Result Report in `.pdf` Format

Create a test suite from two test files, run the suite, and generate a `.pdf` report of the results.

Create a new file in your working folder named `ScriptBasedTest.m` containing the following test script. The script includes two failing and incomplete tests.

```
%% Test double class
expSolution = 'double';
actSolution = ones;
assert(isa(actSolution,expSolution))

%% Test single class
expSolution = 'single';
actSolution = ones('single');
assert(isa(actSolution,expSolution))

%% Test uint16 class
expSolution = 'uint16';
actSolution = ones('uint16');
assert(isa(actSolution,expSolution))

%% Test that fails
assert(false==true);

%% Another test that fails
```

```
assert(strcmp('correlation','causation'))
```

Create a file named `ClassBasedTest.m` containing the following test class. The class includes a failing test that, with parameterization, results in nine failed test results.

```
classdef ClassBasedTest < matlab.unittest.TestCase
    properties (ClassSetupParameter)
        generator = {'twister','combRecursive','multFibonacci'};
    end
    properties (MethodSetupParameter)
        seed = {0,123,4294967295};
    end
    properties (TestParameter)
        dim1 = struct('small',1,'medium',2,'large',3);
        dim2 = struct('small',2,'medium',3,'large',4);
        dim3 = struct('small',3,'medium',4,'large',5);
        type = {'single','double'};
    end
    methods (TestClassSetup)
        function ClassSetup(testCase,generator)
            orig = rng;
            testCase.addTeardown(@rng,orig)
            rng(0, generator)
        end
    end
    methods (TestMethodSetup)
        function MethodSetup(testCase,seed)
            orig = rng;
            testCase.addTeardown(@rng,orig)
            rng(seed)
        end
    end
    methods (Test, ParameterCombination='sequential')
        function testSize(testCase,dim1,dim2,dim3)
            testCase.verifySize(rand(dim1,dim2,dim3),[dim1 dim2 dim3])
        end
    end
    methods (Test, ParameterCombination='pairwise')
        function testRepeatable(testCase,dim1,dim2,dim3)
            state = rng;
            firstRun = rand(dim1,dim2,dim3);
            rng(state)
            secondRun = rand(dim1,dim2,dim3);
            testCase.verifyEqual(firstRun,secondRun);
        end
```

```
    end
    methods (Test)
        function testClass(testCase,dim1,dim2,type)
            testCase.verifyClass(rand(dim1,dim2,type),type)
        end
    end
end
```

At the command prompt, create a test suite from both test files.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
import matlab.unittest.plugins.TestReportPlugin;

suite = testsuite({'ScriptBasedTest','ClassBasedTest'})
```

```
suite =

  1×284 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   17 Unique Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

Create a silent test runner, so that there is no information output to the command window. Create a `TestReportPlugin` that sends output to the file `MyTestReport.pdf`.

```
runner = TestRunner.withNoPlugins;
pdfFile = 'MyTestReport.pdf';
plugin = TestReportPlugin.producingPDF(pdfFile);
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin);
result = runner.run(suite)
```

```
Generating report. Please wait.
    Preparing content for the report.
    Adding content to the report.
```

```
    Writing report to file.
Report has been saved to: C:\work\MyTestReport.pdf

result =

  1×284 TestResult array with properties:

    Name
    Passed
    Failed
    Incomplete
    Duration
    Details

Totals:
   282 Passed, 2 Failed, 2 Incomplete.
   2.2054 seconds testing time.
```

Open the test report.

```
open(pdfFile)
```

Generate `.pdf` Report That Includes Passing Diagnostics

Create a test suite from a function-based test, run the suite, and generate a report of the results. Include passing diagnostics and the text output to the Command Window.

Create a new file in your working folder named `FunctionBasedTest.m` containing the following function-based test. The test file includes two failing tests.

```
%% Main function to generate tests
function tests = FunctionBasedTest
tests = functiontests(localfunctions);
end

%% Test Functions
function passingTest(testCase)
actSolution = 13*3+7*5;
expSolution = 74;
verifyEqual(testCase,actSolution,expSolution)
end

function failingTest(testCase)
actSolution = single(1);
```

```
verifyTrue(testCase,actSolution)
end

function anotherPassingTest(testCase)
verifyClass(testCase,string('some text'),'string')
end

function anotherFailingTest(testCase)
verifyTrue(testCase,strcmp('42','everything'))
end
```

At the command prompt, create a test suite from `FunctionBasedTest.m`. Create a test runner that displays output to the command window using the default plugin.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
import matlab.unittest.plugins.TestReportPlugin;

suite = testsuite('FunctionBasedTest');
runner = TestRunner.withTextOutput;
```

Create a `TestReportPlugin` that sends output to the file `MyTestReport2.pdf`. Include passing diagnostics and text output from the Command Window in the report.

```
pdfFile = 'MyTestReport2.pdf';
plugin = TestReportPlugin.producingPDF(pdfFile,...
    'IncludingPassingDiagnostics',true,'IncludingCommandWindowText',true);
```

Add the plugin to the `TestRunner` and run the suite.

```
runner.addPlugin(plugin);
result = runner.run(suite);
```

```
Running FunctionBasedTest
.
================================================================================
Verification failed in FunctionBasedTest/failingTest.

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyTrue failed.
    --> The value must be logical. It is of type "single".

    Actual single:
```

```
             1

    ------------------
    Stack Information:
    ------------------
    In C:\Work\FunctionBasedTest.m (failingTest) at 15
================================================================================
..
================================================================================
Verification failed in FunctionBasedTest/anotherFailingTest.

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyTrue failed.
    --> The value must evaluate to "true".

    Actual logical:
           0

    ------------------
    Stack Information:
    ------------------
    In C:\Work\FunctionBasedTest.m (anotherFailingTest) at 23
================================================================================
.
Done FunctionBasedTest
_________

Failure Summary:

     Name                                   Failed  Incomplete  Reason(s)
    ===============================================================================
     FunctionBasedTest/failingTest           X                  Failed by verification.
    -------------------------------------------------------------------------------
     FunctionBasedTest/anotherFailingTest    X                  Failed by verification.

Generating report. Please wait.
    Preparing content for the report.
    Adding content to the report.
    Writing report to file.
Report has been saved to: C:\Work\MyTestReport2.pdf
```

Open the test report.

```
open(pdfFile)
```

Tips

- PDF test reports are generated based on your system locale and the font families installed on your machine. When generating a report with a non-English locale, unless your machine has the Noto Sans CJK font families installed, the report may have pound sign characters (#) in place of Chinese, Japanese, and Korean characters.

See Also

See Also

matlab.unittest.plugins.testreport.PDFTestReportPlugin

Introduced in R2016b

matlab.unittest.plugins.TestRunnerPlugin class

Package: matlab.unittest.plugins

Plugin interface for extending TestRunner

Description

The `TestRunnerPlugin` interface enables extension of the `matlab.unittest.TestRunner`. To customize a test run, create a subclass of `TestRunnerPlugin` and override select methods. `TestRunnerPlugin` provides you with a default implementation, so override only methods necessary to achieve your required customization. Every method you implement must invoke its corresponding superclass method, passing along the same instance of `pluginData` that it receives.

To run tests with this extension, add the custom `TestRunnerPlugin` to the `TestRunner` using the `addPlugin` method of `TestRunner`.

Methods

createSharedTestFixture	Extend creation of shared test fixture instances
createTestClassInstance	Extend creation of class-level TestCase instances
createTestMethodInstance	Extend creation of method-level TestCase instances
reportFinalizedResult	Enable reporting of finalized TestResults
runTest	Extend running of single TestSuite element
runTestClass	Extend running of TestSuite array from same class or function
runTestSuite	Extend running of TestSuite array
runTestMethod	Extend running of single Test method
setupSharedTestFixture	Extend setting up shared test fixture
setupTestClass	Extend setting up test class

setupTestMethod	Extend setting up of test method
teardownSharedTestFixture	Extend tearing down shared test fixture
teardownTestClass	Extend tearing down of test class
teardownTestMethod	Extend tearing down of test method

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.unittest.TestRunner | `matlab.unittest.plugins.plugindata`

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

createSharedTestFixture

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend creation of shared test fixture instances

Syntax

```
f = createSharedTestFixture(plugin,pluginData)
```

Description

`f = createSharedTestFixture(plugin,pluginData)` extends the creation of shared test fixtures and returns the modified `Fixture` instance, `f`. The testing framework uses the fixture instance to customize running tests that use shared fixtures. The testing framework evaluates this method within the scope of the `runTestSuite` method of the `TestRunnerPlugin` for each shared test fixture it needs to set up. A typical implementation of this method is to add listeners to various events originating from the shared test fixture instance. Since the `Fixture` inherits from the `handle` class, add listeners by calling the `addlistener` method from within the `createSharedTestFixture` method.

Input Arguments

plugin

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

pluginData

Shared test fixture creation information, specified as an instance of `matlab.unittest.plugins.plugindata.TestContentCreationPluginData`. The test framework uses this information to introspect into the test content.

Examples

Extend Creation of Shared Test Fixture Instances

Extend the running of tests to count the number of shared test fixture assertion failures.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin

    properties (SetAccess = private)
        FixtureAssertionFailureData = {};
    end

    methods (Access = protected)
        function fixture = createSharedTestFixture(plugin, pluginData)
            % Invoke the super class method
            fixture = createSharedTestFixture@...
                matlab.unittest.plugins.TestRunnerPlugin(plugin, pluginData);

            % Get the fixture name
            fixtureName = pluginData.Name;

            % Add a listener to fixture assertion failures
            % and capture the qualification failure information
            fixture.addlistener('AssertionFailed', @(~,evd) ...
                plugin.captureFixtureAssertionFailureData(evd, fixtureName))
        end
    end

    methods (Access = private)
        function captureFixtureAssertionFailureData(plugin, eventData, fixtureName)
            plugin.FixtureAssertionFailureData{end+1} = struct(...
                'FixtureName', fixtureName, ...
                'ActualValue', eventData.ActualValue, ...
                'Constraint' , eventData.Constraint, ...
                'Stack'      , eventData.Stack);
        end
    end
end
```

- “Write Plugins to Extend TestRunner”
- “Create Custom Plugin”

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.fixtures.Fixture | matlab.unittest.plugins.plugindata.TestContentCreationPluginData | matlab.unittest.qualifications.ExceptionEventData | matlab.unittest.qualifications.QualificationEventData

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

createTestClassInstance

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend creation of class-level TestCase instances

Syntax

```
tc = createTestClassInstance(plugin,pluginData)
```

Description

`tc = createTestClassInstance(plugin,pluginData)` extends the creation of class-level `TestCase` instances, and returns the modified `TestCase` instance, `tc`. The test framework uses the `TestCase` instance to customize running tests that belong to the same test class. The test framework evaluates this method within the scope of the `runTestClass` method of the `TestRunnerPlugin`. A typical implementation of this method is to add listeners to various events originating from the class level instance. Since the `TestCase` inherits from the `handle` class, add listeners by calling the `addlistener` method from within the `createTestClassInstance` method. For each class, the test framework passes the instance to any method with the `TestClassSetup` or `TestClassTeardown` attribute.

Input Arguments

plugin

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

pluginData

Class-level `TestCase` creation information, specified as an instance of `matlab.unittest.plugins.plugindata.TestContentCreationPluginData`. The test framework uses this information to introspect into the test content.

Examples

Extend Creation of Class-Level TestCase Instances

Extend the running of tests to count the number of class-level assumption failures.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin

    properties (SetAccess = private)
        TestClassAssumptionFailureData = {};
    end

    methods (Access = protected)
        function testCase = createTestClassInstance(plugin,pluginData)
            % Invoke super class method
            testCase = createTestClassInstance@...
                matlab.unittest.plugins.TestRunnerPlugin(plugin,pluginData);

            % Get the test class name
            instanceName = pluginData.Name;

            % Add a listener to capture assumption failures
            testCase.addlistener('AssumptionFailed', @(~,evd) ...
                plugin.captureClassLevelAssumptionFailureData(evd,instanceName))
        end
    end

    methods (Access = private)
        function captureClassLevelAssumptionFailureData(plugin,eventData,instanceName)
            plugin.TestClassAssumptionFailureData{end+1} = struct(...
                'InstanceName', instanceName, ...
                'ActualValue'   , eventData.ActualValue, ...
                'Constraint'    , eventData.Constraint, ...
                'Stack'         , eventData.Stack);
        end
    end
end
```

- “Write Plugins to Extend TestRunner”
- “Create Custom Plugin”

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.TestCase | matlab.unittest.plugins.plugindata.TestContentCreationPluginData | matlab.unittest.qualifications.ExceptionEventData | matlab.unittest.qualifications.QualificationEventData

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

createTestMethodInstance

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend creation of method-level TestCase instances

Syntax

```
tc = createTestMethodInstance(plugin,pluginData)
```

Description

`tc = createTestMethodInstance(plugin,pluginData)` extends the creation of method-level `TestCase` instances, and returns the modified `TestCase` instance, `tc`. The test framework evaluates this method within the scope of the `runTest` method of the `TestRunnerPlugin`. A typical implementation of this method is to add listeners to various events originating from the method level instance. Since the `TestCase` inherits from the `handle` class, add listeners by calling the `addlistener` method from within the `createTestMethodInstance` method. The test framework creates instances for every element of the `matlab.unittest.Test` array and passes each instance to its corresponding `Test` methods and to any method with the `TestMethodSetup` or `TestMethodTeardown` attribute.

Input Arguments

plugin

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

pluginData

Method-level `TestCase` creation information, specified as an instance of `matlab.unittest.plugins.plugindata.TestContentCreationPluginData`. The test framework uses this information to introspect into the test content.

Examples

Implement createMethodInstance Method

Add a listener to listen for assumption failures. Use the helper function, `captureMethodLevelAssumptionFailureData`, to populate the `TestMethodAssumptionFailureData` property.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin

    properties (SetAccess = private)
        TestMethodAssumptionFailureData = {};
    end

    methods (Access = protected)
        function testCase = createTestMethodInstance(plugin, pluginData)
            testCase = createTestMethodInstance@...
                matlab.unittest.plugins.TestRunnerPlugin(plugin, pluginData);

            instanceName = pluginData.Name;
            testCase.addlistener('AssumptionFailed', @(~,evd) ...
                plugin.captureMethodLevelAssumptionFailureData(evd,instanceName))
        end
    end

    methods (Access = private)
        function captureMethodLevelAssumptionFailureData(...
                plugin, eventData, instanceName)
            plugin.TestMethodAssumptionFailureData{end+1} = struct(...
                'InstanceName', instanceName, ...
                'ActualValue'      , eventData.ActualValue, ...
                'Constraint'       , eventData.Constraint, ...
                'Stack'            , eventData.Stack);
        end
    end

end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.TestCase | matlab.unittest.plugins.plugindata.TestContentCreationPluginData | matlab.unittest.plugins.TestRunnerPlugin.createTestClassInstance | matlab.unittest.qualifications.ExceptionEventData | matlab.unittest.qualifications.QualificationEventData

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

reportFinalizedResult

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Enable reporting of finalized TestResults

A plugin that overrides the `reportFinalizedResult` method is recommended for streaming or inline reporting of test results. If you implement this method, the test runner reports the results as soon as they are finalized. The plugin can then report test results while the test runner is still running the test suite, rather than waiting until the entire test suite is complete.

Syntax

```
reportFinalizedResult(plugin,pluginData)
```

Description

`reportFinalizedResult(plugin,pluginData)` enables the reporting of finalized `TestResults`. The test runner uses this method to report finalized test results to the plugin. By overriding the method in your `TestRunnerPlugin` class, you can report information about each test result as soon as the test runner determines the test is finalized.

The test framework evaluates this method as soon as it can guarantee that the test result is finalized for a test suite element. It can evaluate this method within the scope of the `runTestSuite`, `runTestClass`, or `runTest` methods of the `TestRunnerPlugin`.

Input Arguments

`plugin` — plugin instance
`matlab.unittest.plugins.TestRunnerPlugin`

Plugin instance, specified as an instance of the `matlab.unittest.plugins.TestRunnerPlugin` class.

`pluginData` — Finalized test information
`matlab.unittest.plugins.plugindata.FinalizedResultPluginData`

Finalized test information, specified as an instance of the `matlab.unittest.plugins.plugindata.FinalizedResultPluginData` class. The test framework uses this information to describe the test content to the plugin.

Examples

Display Status of Each Finalized Test Element

Use the `reportFinalizedResult` method to display the status of each test element.

Create the following plugin in a file,`ExamplePlugin.m`, in your current working folder.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin
    methods (Access = protected)
        function reportFinalizedResult(plugin, pluginData)
            thisResult = pluginData.TestResult;
            if thisResult.Passed
                status = 'PASSED';
            elseif thisResult.Failed
                status = 'FAILED';
            elseif thisResult.Incomplete
                status = 'SKIPPED';
            end
            fprintf('%s: %s in %f seconds.\n',thisResult.Name,...
                status,thisResult.Duration)
            reportFinalizedResult@...
                matlab.unittest.plugins.TestRunnerPlugin(plugin,pluginData);
        end
    end
end
```

Create the following test class in a file, `ExampleTest.m`, in your current working folder.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)
            testCase.assertGreaterThan(5,1)
        end
        function testTwo(testCase)
```

```
            wrongAnswer = 'wrong';
            testCase.verifyEmpty(wrongAnswer,'Not Empty')
            testCase.verifyClass(wrongAnswer,'double','Not double')
        end
        function testThree(testCase)
            testCase.assumeEqual(7*2,13,'Values not equal')
        end
        function testFour(testCase)
            testCase.verifyEqual(3+2,5);
        end
    end
end
```

At the command prompt, create a test suite, add the plugin to the test runner, and run the tests.

```
import matlab.unittest.TestSuite
import matlab.unittest.TestRunner

suite = TestSuite.fromClass(?ExampleTest);
runner = TestRunner.withNoPlugins;
runner.addPlugin(ExamplePlugin)
result = runner.run(suite);
```

```
ExampleTest/testOne: PASSED in 0.002216 seconds.
ExampleTest/testTwo: FAILED in 0.006105 seconds.
ExampleTest/testThree: SKIPPED in 0.007458 seconds.
ExampleTest/testFour: PASSED in 0.004865 seconds.
```

- "Write Plugins to Extend TestRunner"
- "Plugin to Generate Custom Test Output Format"

Definitions

Finalized Test Results

A test result is finalized when no remaining test content can modify the results. Examples of when the test runner might modify previously run test results include when it executes code inside of `TestClassTeardown` methods, or when it tears down shared test fixtures.

See Also

See Also

matlab.unittest.TestRunner |
matlab.unittest.plugins.plugindata.FinalizedResultPluginData

Topics

"Write Plugins to Extend TestRunner"
"Plugin to Generate Custom Test Output Format"

Introduced in R2015b

runTest

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend running of single TestSuite element

Syntax

```
runTest(plugin,pluginData)
```

Description

`runTest(plugin,pluginData)` extends the running of a single `TestSuite` element. This method allows the test author to override the method that runs a scalar test element in the `TestSuite` array, including the creation of the `TestCase`, and the `TestMethodSetup` and `TestMethodTeardown` routines. Provided the test framework completes all fixture setup, it invokes this method one time per test element.

Input Arguments

`plugin`

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

`pluginData`

Test element information, specified as an instance of `matlab.unittest.plugins.plugindata.TestSuiteRunPluginData`. The test framework uses this information to introspect into the test content.

Examples

Extend runTest method

Print the label of the test content element at run time.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin
    methods (Access = protected)
        function runTest(plugin, pluginData)
            fprintf('### Running test: %s\n', pluginData.Name)
            runTest@matlab.unittest.plugins.TestRunnerPlugin(...
                plugin, pluginData);
        end
    end
end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner |
matlab.unittest.plugins.plugindata.TestSuiteRunPluginData |
matlab.unittest.TestResult

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

runTestClass

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend running of TestSuite array from same class or function

Syntax

```
runTestClass(plugin,pluginData)
```

Description

`runTestClass(plugin,pluginData)` extends the running of tests that belong to the same test class, function, or script. This method applies to a subset of the full `TestSuite` being run by the `TestRunner`. The test framework evaluates this method within the scope of the `runTestSuite` method of the `TestRunnerPlugin`. It evaluates this method between setting up and tearing down the shared test fixture (`setupSharedTestFixture` and `teardownSharedTestFixture`). Provided the test framework completes shared test fixture setup, it invokes this method one time per test class.

Input Arguments

`plugin`

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

`pluginData`

Test suite information, specified as an instance of `matlab.unittest.plugins.plugindata.TestSuiteRunPluginData`. The test framework uses this information to introspect into the test content.

Examples

Extend runTestClass method

Print the label of the test content element at run time.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin
    methods (Access = protected)
        function runTestClass(plugin, pluginData)
            fprintf('### Running test class: %s\n', pluginData.Name)

            runTestClass@matlab.unittest.plugins.TestRunnerPlugin(...
                plugin, pluginData);
        end
    end
end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.TestSuite | matlab.unittest.plugins.plugindata.TestSuiteRunPluginData | matlab.unittest.TestResult

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

runTestSuite

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend running of TestSuite array

Syntax

`runTestSuite(plugin,pluginData)`

Description

`runTestSuite(plugin,pluginData)` extends the running of the original `TestSuite` array that the test framework hands to the `TestRunner`.

Input Arguments

`plugin`

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

`pluginData`

Test suite information, specified as an instance of `matlab.unittest.plugins.plugindata.TestSuiteRunPluginData`. The test framework uses this information to introspect into the test content.

Examples

Implement runTestSuite Method

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin
    methods (Access = protected)
        function runTestSuite(plugin, pluginData)
```

```
            % Introspect into pluginData to get TestSuite size
            suiteSize = numel(pluginData.TestSuite);
            fprintf('### Running a total of %d tests\n', suiteSize)

            % Invoke the super class method
            runTestSuite@matlab.unittest.plugins.TestRunnerPlugin(plugin, pluginData)
        end
    end
end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner |
matlab.unittest.plugins.plugindata.TestSuiteRunPluginData |
matlab.unittest.TestResult

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

runTestMethod

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend running of single Test method

Syntax

```
runTestMethod(plugin,pluginData)
```

Description

`runTestMethod(plugin,pluginData)` extends the running of a single `Test` method. The test framework evaluates this method within the scope of the `runTest` method of the `TestRunnerPlugin`. It evaluates this method between setting up and tearing down the scalar `TestSuite` element (`setupTestMethod` and `teardownTestMethod`).

Input Arguments

`plugin`

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

`pluginData`

Test method information, specified as an instance of `matlab.unittest.plugins.plugindata.TestSuiteRunPluginData`. The test framework uses this information to introspect into the test content.

Examples

Extend runTestMethod method

Print the time taken to evaluate the test method.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin
    methods (Access = protected)
        function runTestMethod(plugin, pluginData)
            tic

            runTestMethod@matlab.unittest.plugins.TestRunnerPlugin(...
                plugin, pluginData);

            fprintf('### %s ran in %f seconds excluding fixture time.',...
                pluginData.Name, toc)
        end
    end
end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.plugins.plugindata.TestSuiteRunPluginData | matlab.unittest.TestResult | matlab.unittest.plugins.TestRunnerPlugin.runTest | matlab.unittest.plugins.TestRunnerPlugin.runTestClass

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

setupSharedTestFixture

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend setting up shared test fixture

Syntax

```
setupSharedTestFixture(plugin,pluginData)
```

Description

`setupSharedTestFixture(plugin,pluginData)` extends the setting up of a shared test fixture. This method defines how the `TestRunner` performs shared fixture setup. The test framework evaluates this method one time for each shared test fixture, within the scope of the `runTestSuite` method of the `TestRunnerPlugin`.

Input Arguments

`plugin`

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

`pluginData`

Shared test fixture setup information, specified as an instance of `matlab.unittest.plugins.plugindata.SharedTestFixturePluginData`. The test framework uses this information to introspect into the test content.

Examples

Implement setupSharedTestFixture Method

Display the shared test fixture name at setup time.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin

    methods (Access = protected)
        function setupSharedTestFixture(plugin, pluginData)
            fprintf('### Setting up: %s\n', pluginData.Name)
            setupSharedTestFixture@matlab.unittest.plugins.TestRunnerPlugin...
                (plugin, pluginData);
        end
    end
end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.plugins.plugindata.SharedTestFixturePluginData | createSharedTestFixture

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

setupTestClass

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend setting up test class

Syntax

```
setupTestClass(plugin,pluginData)
```

Description

`setupTestClass(plugin,pluginData)` extends the setting up of a test class. This method defines how the `TestRunner` performs test class setup. The test framework evaluates this method within the scope of the `runTestClass` method of the `TestRunnerPlugin`. If the test class contains properties with the `ClassSetupParameter` attribute, the test framework evaluates the `setupTestClass` method as many times as the class setup parameterization dictates.

Input Arguments

`plugin`

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

`pluginData`

Test class setup information, specified as an instance of `matlab.unittest.plugins.plugindata.ImplicitFixturePluginData`. The test framework uses this information to introspect into the test content.

Examples

Implement setupTestClass Method

Display the test class name at setup time.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin

    methods (Access = protected)
        function setupTestClass(plugin, pluginData)
            fprintf('### Setting up: %s\n', pluginData.Name)
            setupTestClass@matlab.unittest.plugins.TestRunnerPlugin...
                (plugin, pluginData);
        end
    end
end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.plugins.plugindata.ImplicitFixturePluginData | createTestClassInstance

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

setupTestMethod

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend setting up of test method

Syntax

```
setupTestMethod(plugin,pluginData)
```

Description

`setupTestMethod(plugin,pluginData)` extends the setting up of a test method. This method defines how the `TestRunner` performs test method setup for the single test suite element. The test framework evaluates this method within the scope of the `runTest` method of the `TestRunnerPlugin`.

Input Arguments

`plugin`

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

`pluginData`

Test method setup information, specified as an instance of `matlab.unittest.plugins.plugindata.ImplicitFixturePluginData`. The test framework uses this information to introspect into the test content.

Examples

Implement setupTestMethod

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin
```

```
    methods (Access = protected)
        function setupTestMethod(plugin, pluginData)
            fprintf('### Setting up: %s\n', pluginData.Name)
            setupTestMethod@matlab.unittest.plugins.TestRunnerPlugin...
                (plugin, pluginData);
        end
    end
end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.plugins.plugindata.ImplicitFixturePluginData

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

teardownSharedTestFixture

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend tearing down shared test fixture

Syntax

```
teardownSharedTestFixture(plugin,pluginData)
```

Description

`teardownSharedTestFixture(plugin,pluginData)` extends the tearing down of a shared test fixture. This method defines how the `TestRunner` performs shared fixture teardown. The test framework evaluates this method one time for each shared test fixture, within the scope of the `runTestSuite` method of the `TestRunnerPlugin`.

Input Arguments

`plugin`

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

`pluginData`

Shared test fixture teardown information, specified as an instance of `matlab.unittest.plugins.plugindata.SharedTestFixturePluginData`. The test framework uses this information to introspect into the test content.

Examples

Implement teardownSharedTestFixture Method

Display the shared test fixture name at teardown time.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin

    methods (Access = protected)
        function teardownSharedTestFixture(plugin, pluginData)
            fprintf('### Setting up: %s\n', pluginData.Name)
            teardownSharedTestFixturee@matlab.unittest.plugins.TestRunnerPlugin...
                (plugin, pluginData);
        end
    end
end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.plugins.plugindata.SharedTestFixturePluginData | createSharedTestFixture

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

teardownTestClass

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend tearing down of test class

Syntax

```
teardownTestClass(plugin,pluginData)
```

Description

`teardownTestClass(plugin,pluginData)` extends the tearing down of a test class. This method defines how the `TestRunner` performs test class teardown. The test framework evaluates this method within the scope of the `runTestClass` method of the `TestRunnerPlugin`. If the test class contains properties with the `ClassSetupParameter` attribute, the test framework evaluates the `teardownTestClass` method as many times as the class setup parameterization dictates.

Input Arguments

plugin

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

pluginData

Test class teardown information, specified as an instance of `matlab.unittest.plugins.plugindata.ImplicitFixturePluginData`. The test framework uses this information to introspect into the test content.

Examples

Implement teardownTestClass Method

Display the test class name at teardown time.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin

    methods (Access = protected)
        function teardownTestClass(plugin, pluginData)
            fprintf('### Tearing down: %s\n', pluginData.Name)
            teardownTestClass@matlab.unittest.plugins.TestRunnerPlugin...
                (plugin, pluginData);
        end
    end
end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner |
matlab.unittest.plugins.plugindata.ImplicitFixturePluginData |
createTestClassInstance

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

teardownTestMethod

Class: matlab.unittest.plugins.TestRunnerPlugin
Package: matlab.unittest.plugins

Extend tearing down of test method

Syntax

```
teardownTestMethod(plugin,pluginData)
```

Description

`teardownTestMethod(plugin,pluginData)` extends the tearing down of a test method. This method defines how the `TestRunner` performs test method teardown for the single test suite element. The test framework evaluates this method within the scope of the `runTest` method of the `TestRunnerPlugin`.

Input Arguments

`plugin`

Instance of `matlab.unittest.plugins.TestRunnerPlugin`.

`pluginData`

Test method teardown information, specified as an instance of `matlab.unittest.plugins.plugindata.ImplicitFixturePluginData`. The test framework uses this information to introspect into the test content.

Examples

Implement teardownTestMethod Method

Display the test method name at teardown time.

```
classdef ExamplePlugin < matlab.unittest.plugins.TestRunnerPlugin
    methods (Access = protected)
        function teardownTestMethod(plugin, pluginData)
            fprintf('### Tearing down: %s\n', pluginData.Name)
            teardownTestMethod@matlab.unittest.plugins.TestRunnerPlugin...
                (plugin, pluginData);
        end
    end
end
```

- "Write Plugins to Extend TestRunner"
- "Create Custom Plugin"

See Also

See Also

matlab.unittest.TestRunner |
matlab.unittest.plugins.plugindata.ImplicitFixturePluginData |
matlab.unittest.plugins.TestRunnerPlugin.setupTestMethod

Topics

"Write Plugins to Extend TestRunner"
"Create Custom Plugin"

Introduced in R2014a

matlab.unittest.plugins.TestRunProgressPlugin class

Package: matlab.unittest.plugins

Plugin that reports test run progress

Description

The `TestRunProgressPlugin` creates a plugin that reports on test run progress.

Construction

`matlab.unittest.plugins.TestRunProgressPlugin.withVerbosity(v)` constructs a `TestRunProgressPlugin` for the specified verbosity.

`matlab.unittest.plugins.TestRunProgressPlugin.withVerbosity(v, stream)` redirects the text output to the output stream.

Input Arguments

v — Verbosity level

`1 | 2 | 3 | 4 | matlab.unittest.Verbosity` enumeration

Verbosity level, specified as an integer value between 1 and 4 or a `matlab.unittest.Verbosity` enumeration object. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration.

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
1	`matlab.unittest.Verbosity.Ter`	Minimal amount of information
2	`matlab.unittest.Verbosity.Con`	Typical amount of information
3	`matlab.unittest.Verbosity.Det`	Supplemental amount of information

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
4	`matlab.unittest.Verbosity.Ver`	Surplus of information

`stream` — Location where plugin directs text output
`ToStandardOutput` instance (default) | `OutputStream` instance

Location where the plugin directs text output, specified as an `OutputStream` instance. By default, the plugin uses the `OutputStream` subclass `ToStandardOutput` as the stream.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create Test Run Progress Plugin

Create a function-based test called `cylinderPlotTest` in a file in your working folder.

```
function tests = cylinderPlotTest
tests = functiontests(localfunctions);
end

function setupOnce(testCase)
testCase.TestData.Figure = figure;
addTeardown(testCase,@close,testCase.TestData.Figure)
end

function setup(testCase)
testCase.TestData.Axes = axes('Parent',testCase.TestData.Figure);
addTeardown(testCase,@clf,testCase.TestData.Figure)
cylinder(testCase.TestData.Axes,10)
end
```

```
function testXLim(testCase)
xlim = testCase.TestData.Axes.XLim;
verifyLessThanOrEqual(testCase,xlim(1),-10,'Minimum x-limit too large')
verifyGreaterThanOrEqual(testCase,xlim(2),10,'Maximum x-limit too small')
end

function zdataTest(testCase)
s = findobj(testCase.TestData.Axes,'Type','surface');
verifyEqual(testCase,min(s.ZData(:)),0,'Min cylinder value is incorrect')
verifyEqual(testCase,max(s.ZData(:)),1,'Max cylinder value is incorrect')
end
```

At the command prompt, run the test.

```
results = run(cylinderPlotTest);
```

```
Running cylinderPlotTest
..
Done cylinderPlotTest
__________
```

By default, the test runner uses verbosity level 2.

Create a test runner to report the diagnostics at level 1, and rerun the test.

```
import matlab.unittest.TestRunner
import matlab.unittest.plugins.TestRunProgressPlugin

runner = TestRunner.withNoPlugins;
p = TestRunProgressPlugin.withVerbosity(1);
runner.addPlugin(p);

results = runner.run(cylinderPlotTest);
```

```
..
```

Create a test runner to report the diagnostics at level 4, and rerun the test.

```
runner = TestRunner.withNoPlugins;
p = TestRunProgressPlugin.withVerbosity(4);
runner.addPlugin(p);

results = runner.run(cylinderPlotTest);
```

```
 Running cylinderPlotTest
```

```
  Setting up cylinderPlotTest
    Evaluating TestClassSetup: setupOnce
  Done setting up cylinderPlotTest in 0.067649 seconds
   Running cylinderPlotTest/testXLim
    Evaluating TestMethodSetup: setup
    Evaluating Test: testXLim
    Evaluating TestMethodTeardown: teardown
    Evaluating addTeardown function: clf
   Done cylinderPlotTest/testXLim in 0.053834 seconds
   Running cylinderPlotTest/zdataTest
    Evaluating TestMethodSetup: setup
    Evaluating Test: zdataTest
    Evaluating TestMethodTeardown: teardown
    Evaluating addTeardown function: clf
   Done cylinderPlotTest/zdataTest in 0.037715 seconds
  Tearing down cylinderPlotTest
    Evaluating TestClassTeardown: teardownOnce
    Evaluating addTeardown function: close
  Done tearing down cylinderPlotTest in 0.022783 seconds
 Done cylinderPlotTest in 0.18198 seconds
```

Configure Progress Message Output

Create a class named `ExampleProgressTest` in a file in your current working folder.

```
classdef ExampleProgressTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)  % Test fails
            testCase.verifyEqual(5,4)
        end
        function testTwo(testCase)  % Test passes
            testCase.verifyEqual(5,5)
        end
    end
end
```

At the command prompt, create the test suite and a runner at verbosity level 3, and then run the test.

```
import matlab.unittest.TestSuite
import matlab.unittest.TestRunner
import matlab.unittest.plugins.TestRunProgressPlugin
```

```
suite = TestSuite.fromClass(?ExampleProgressTest);

runner = TestRunner.withNoPlugins;
p = TestRunProgressPlugin.withVerbosity(3);
runner.addPlugin(p);
results = runner.run(suite);
```

```
 Running ExampleProgressTest
  Setting up ExampleProgressTest
  Done setting up ExampleProgressTest in 0 seconds
   Running ExampleProgressTest/testOne
   Done ExampleProgressTest/testOne in 0.0049988 seconds
   Running ExampleProgressTest/testTwo
   Done ExampleProgressTest/testTwo in 0.0044541 seconds
  Tearing down ExampleProgressTest
  Done tearing down ExampleProgressTest in 0 seconds
 Done ExampleProgressTest in 0.0094529 seconds
```

Create a new plugin to direct the output to a file named `myOutput.log`, and rerun the tests.

```
import matlab.unittest.plugins.ToFile
outFile = 'myOutput.log';

runner = TestRunner.withNoPlugins;
p = TestRunProgressPlugin.withVerbosity(3,ToFile(outFile));
runner.addPlugin(p);

results = runner.run(suite);
```

Observe the contents of the file created by the plugin.

```
disp(fileread(outFile))
```

```
 Running ExampleProgressTest
  Setting up ExampleProgressTest
  Done setting up ExampleProgressTest in 0 seconds
   Running ExampleProgressTest/testOne
   Done ExampleProgressTest/testOne in 0.0050172 seconds
   Running ExampleProgressTest/testTwo
   Done ExampleProgressTest/testTwo in 0.0049449 seconds
  Tearing down ExampleProgressTest
  Done tearing down ExampleProgressTest in 0 seconds
 Done ExampleProgressTest in 0.009962 seconds
```

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.plugins.TestRunnerPlugin | matlab.unittest.plugins.OutputStream | matlab.unittest.plugins.ToStandardOutput | matlab.unittest.Verbosity

Introduced in R2014b

matlab.unittest.plugins.XMLPlugin class

Package: matlab.unittest.plugins

Plugin that writes test results in XML format

Description

The `XMLPlugin` class creates a plugin that writes test results to a file in XML format.

Construction

Instantiate an `XMLPlugin` using one of its static methods.

`matlab.unittest.plugins.XMLPlugin.producingJUnitFormat(xmlFile)` returns a plugin that produces JUnit-style XML output to the file, `xmlFile`. Using this plugin, you can integrate MATLAB Unit Test results into third-party systems that recognize the JUnit-style XML. For example, you can integrate test results with continuous integration systems like Jenkins, TeamCity, or Microsoft Team Foundation Server.

Input Arguments

`xmlFile` — Name of test-result file
character vector | string scalar

Name of the test-result file, specified as a character vector or string scalar. If `xmlFile` exists, the test framework overwrites the file.

Example: `XMLPlugin.producingJUnitFormat('myTestResults.xml')`

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Output Results to JUnit-style XML File

Create `ExampleTest.m` containing the following test class.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)  % Test fails
            testCase.verifyEqual(5,4,'Testing 5==4')
        end
        function testTwo(testCase)  % Test passes
            testCase.verifyEqual(5,5,'Testing 5==5')
        end
        function testThree(testCase) % Test fails
            testCase.assumeTrue(false)
        end
    end
end
```

Create a test suite from the `ExampleTest` class. Create a silent test runner.

```
import matlab.unittest.TestRunner
import matlab.unittest.TestSuite
import matlab.unittest.plugins.XMLPlugin

suite = TestSuite.fromClass(?ExampleTest);
runner = TestRunner.withNoPlugins;
```

Create an `XMLPlugin` that writes test results to the file `myTestResults.xml`.

```
xmlFile = 'myTestResults.xml';
p = XMLPlugin.producingJUnitFormat(xmlFile);
```

Add the plugin to the test runner and run the suite.

```
runner.addPlugin(p)
results = runner.run(suite);
table(results)
```

```
ans =

             Name              Passed    Failed    Incomplete    Duration       Details
    ______________________     ______    ______    __________    ________    _________
```

```
    'ExampleTest/testOne'      false     true      false          0.078297    [1x1 stru
    'ExampleTest/testTwo'      true      false     false         0.0038761    [1x1 stru
    'ExampleTest/testThree'    false     false     true           0.049763    [1x1 stru
```

View the contents in the file created by the plugin.

```
disp(fileread(xmlFile))
```

```
<?xml version="1.0" encoding="utf-8"?>
<testsuites>
   <testsuite errors="0" failures="1" name="" skipped="1" tests="3" time="0.0493">
      <testcase classname="ExampleTest" name="testOne" time="0.030643">
         <failure type="VerificationFailure">========================================
Verification failed in ExampleTest/testOne.

    ----------------
    Test Diagnostic:
    ----------------
    Testing 5==4

    ---------------------
    Framework Diagnostic:
    ---------------------
    verifyEqual failed.
    --&gt; The values are not equal using "isequaln".
    --&gt; Failure table:
                Actual    Expected    Error    RelativeError
                ______    ________    _____    _____________

                5         4           1        0.25

    Actual double:
             5
    Expected double:
             4

    ------------------
    Stack Information:
    ------------------
    In C:\work\ExampleTest.m (ExampleTest.testOne) at 4
==============================================================================
</failure>
      </testcase>
      <testcase classname="ExampleTest" name="testTwo" time="0.004332"/>
```

```
      <testcase classname="ExampleTest" name="testThree" time="0.014325">
         <skipped>==========================================================================
ExampleTest/testThree was filtered.
==============================================================================
</skipped>
      </testcase>
   </testsuite>
</testsuites>
```

Tips

- If your test file is a script-based or function-based test, the value of the `classname` attribute of the `<testcase>` element is the test file name.

See Also

External Websites

JUnit

Introduced in R2015b

matlab.unittest.plugins.diagnosticrecord

Summary of classes associated with MATLAB Plugin Diagnostic Records

Description

matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord	Diagnostic information
matlab.unittest.plugins.diagnosticrecord.ExceptionDiagnosticRecord	Diagnostic information about errors
matlab.unittest.plugins.diagnosticrecord.LoggedDiagnosticRecord	Diagnostic information about logged events
matlab.unittest.plugins.diagnosticrecord.QualificationDiagnosticRecord	Diagnostic information about qualification events

See Also

See Also

DiagnosticsRecordingPlugin | `matlab.unittest.plugins`

matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord class

Package: matlab.unittest.plugins.diagnosticrecord

Diagnostic information

Description

The `DiagnosticRecord` class defines the diagnostic information that the `DiagnosticsRecordingPlugin` includes on the `TestResult`. The `DiagnosticsRecordingPlugin` creates this class, so there is no need for test authors to construct the class directly.

Properties

`Event` — Name of recorded event

character vector

Name of recorded event, returned as a character vector. This property corresponds to the event on the `TestCase` instance.

Example: `'VerificationPassed'`

Example: `'ExceptionThrown'`

Example: `'DiagnosticLogged'`

Data Types: `char`

`EventLocation` — Location of event

character vector

Location of event, returned as a character vector. This property corresponds to the label of the test content.

Example: `'myTestClass'`

Example: `'myTestClass/testMethod1'`

Example: `'myTestClass[classSetupParam=value1]/testMethod1'`

Example: `'mySharedTestFixture'`

Data Types: `char`

`EventScope` — Scope where event originated
instance of `matlab.unittest.Scope`

Scope where event originated, returned as an instance of `matlab.unittest.Scope`. This property corresponds to the label of the test content.

Example: `matlab.unittest.Scope.TestMethod`

Example: `matlab.unittest.Scope.TestClass`

Example: `matlab.unittest.Scope.SharedTestFixture`

`Stack` — Stack trace to diagnostic
structure

Stack trace to the location of the diagnostic event, returned as a structure containing the fields `file`, `name`, and `line`.

Data Types: `struct`

`Report` — Diagnostic information
character vector

All diagnostic information, returned as a character vector. The report provides an overall summary of the event.

Data Types: `char`

Methods

selectFailed	Return diagnostic records for failed events
selectIncomplete	Return diagnostic records for incomplete events
selectLogged	Return diagnostic records for logged events
selectPassed	Return diagnostic records for passed events

See Also

See Also

matlab.unittest.plugins.DiagnosticsRecordingPlugin | `matlab.unittest.plugins.diagnosticrecord`

Introduced in R2016a

matlab.unittest.plugins.diagnosticrecord.ExceptionDiagnostic class

Package: matlab.unittest.plugins.diagnosticrecord
Superclasses: matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord

Diagnostic information about errors

Description

The `ExceptionDiagnosticRecord` class defines the diagnostic information about errors that the `DiagnosticsRecordingPlugin` includes on the `TestResult`. The `DiagnosticsRecordingPlugin` creates this class, so there is no need for test authors to construct the class directly.

Properties

`Exception` — Error information

`MException` object

Error information, returned as an `MException` object.

These properties are inherited from `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord`:

`Event` — Name of recorded event

character vector

Name of recorded event, returned as a character vector. This property corresponds to the event on the `TestCase` instance.

Example: `'VerificationPassed'`

Example: `'ExceptionThrown'`

Example: `'DiagnosticLogged'`

Data Types: `char`

`EventLocation` — Location of event

character vector

Location of event, returned as a character vector. This property corresponds to the label of the test content.

Example: `'myTestClass'`

Example: `'myTestClass/testMethod1'`

Example: `'myTestClass[classSetupParam=value1]/testMethod1'`

Example: `'mySharedTestFixture'`

Data Types: `char`

`EventScope` — Scope where event originated

instance of `matlab.unittest.Scope`

Scope where event originated, returned as an instance of `matlab.unittest.Scope`. This property corresponds to the label of the test content.

Example: `matlab.unittest.Scope.TestMethod`

Example: `matlab.unittest.Scope.TestClass`

Example: `matlab.unittest.Scope.SharedTestFixture`

`Stack` — Stack trace to diagnostic

structure

Stack trace to the location of the diagnostic event, returned as a structure containing the fields `file`, `name`, and `line`.

Data Types: `struct`

`Report` — Diagnostic information

character vector

All diagnostic information, returned as a character vector. The report provides an overall summary of the event.

Data Types: `char`

Methods

Inherited Methods

selectFailed	Return diagnostic records for failed events
selectIncomplete	Return diagnostic records for incomplete events
selectLogged	Return diagnostic records for logged events
selectPassed	Return diagnostic records for passed events

See Also

See Also

matlab.unittest.plugins.DiagnosticsRecordingPlugin | `matlab.unittest.plugins.diagnosticrecord`

Introduced in R2016a

matlab.unittest.plugins.diagnosticrecord.LoggedDiagnosticRe class

Package: matlab.unittest.plugins.diagnosticrecord
Superclasses: matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord

Diagnostic information about logged events

Description

The `LoggedDiagnosticRecord` class defines the diagnostic information about logged events that the `DiagnosticsRecordingPlugin` includes on the `TestResult`. The `DiagnosticsRecordingPlugin` creates this class, so there is no need for test authors to construct the class directly.

Properties

`LoggedDiagnosticResult` — Logged diagnostic result

cell array of character vectors

Logged diagnostic result, returned as a cell array of character vectors. A single `log` call can result in multiple logged diagnostics.

Data Types: `char`

`Timestamp` — Time the `log` method was called

date and time

The time the `log` method was called, returned as a date and time.

Data Types: `datetime`

`Verbosity` — Verbosity level of the logged message

`matlab.unittest.Verbosity` enumeration

Verbosity level of the logged message, returned as a `matlab.unittest.Verbosity` enumeration object.

Example: `Terse`

These properties are inherited from `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord`:

`Event` — Name of recorded event
character vector

Name of recorded event, returned as a character vector. This property corresponds to the event on the `TestCase` instance.

Example: `'VerificationPassed'`

Example: `'ExceptionThrown'`

Example: `'DiagnosticLogged'`

Data Types: `char`

`EventLocation` — Location of event
character vector

Location of event, returned as a character vector. This property corresponds to the label of the test content.

Example: `'myTestClass'`

Example: `'myTestClass/testMethod1'`

Example: `'myTestClass[classSetupParam=value1]/testMethod1'`

Example: `'mySharedTestFixture'`

Data Types: `char`

`EventScope` — Scope where event originated
instance of `matlab.unittest.Scope`

Scope where event originated, returned as an instance of `matlab.unittest.Scope`. This property corresponds to the label of the test content.

Example: `matlab.unittest.Scope.TestMethod`

Example: `matlab.unittest.Scope.TestClass`

Example: `matlab.unittest.Scope.SharedTestFixture`

`Stack` — Stack trace to diagnostic
structure

Stack trace to the location of the diagnostic event, returned as a structure containing the fields `file`, `name`, and `line`.

Data Types: `struct`

`Report` — Diagnostic information
character vector

All diagnostic information, returned as a character vector. The report provides an overall summary of the event.

Data Types: `char`

Methods

Inherited Methods

selectFailed	Return diagnostic records for failed events
selectIncomplete	Return diagnostic records for incomplete events
selectLogged	Return diagnostic records for logged events
selectPassed	Return diagnostic records for passed events

See Also

See Also

matlab.unittest.plugins.DiagnosticsRecordingPlugin | `matlab.unittest.plugins.diagnosticrecord`

Introduced in R2016a

matlab.unittest.plugins.diagnosticrecord.QualificationDiagno class

Package: matlab.unittest.plugins.diagnosticrecord
Superclasses: matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord

Diagnostic information about qualification events

Description

The `QualificationDiagnosticRecord` class defines the diagnostic information about qualification events that the `DiagnosticsRecordingPlugin` includes on the `TestResult`. The `DiagnosticsRecordingPlugin` creates this class, so there is no need for test authors to construct the class directly.

Properties

`TestDiagnosticResult` — Test diagnostic result

cell array of character vectors

Test diagnostic result, returned as a cell array of character vectors. A single qualification can result in multiple test diagnostics.

Data Types: `char`

`FrameworkDiagnosticResult` — Framework diagnostic result

cell array of character vectors

Framework diagnostic result, returned as a cell array of character vectors. A single qualification can result in multiple framework diagnostics.

Example: `{'verifyClass failed.…'}`

Data Types: `char`

These properties are inherited from `matlab.unittest.plugins.diagnosticrecord.DiagnosticRecord`:

`Event` — Name of recorded event

character vector

Name of recorded event, returned as a character vector. This property corresponds to the event on the `TestCase` instance.

Example: `'VerificationPassed'`

Example: `'ExceptionThrown'`

Example: `'DiagnosticLogged'`

Data Types: `char`

`EventLocation` — Location of event

character vector

Location of event, returned as a character vector. This property corresponds to the label of the test content.

Example: `'myTestClass'`

Example: `'myTestClass/testMethod1'`

Example: `'myTestClass[classSetupParam=value1]/testMethod1'`

Example: `'mySharedTestFixture'`

Data Types: `char`

`EventScope` — Scope where event originated

instance of `matlab.unittest.Scope`

Scope where event originated, returned as an instance of `matlab.unittest.Scope`. This property corresponds to the label of the test content.

Example: `matlab.unittest.Scope.TestMethod`

Example: `matlab.unittest.Scope.TestClass`

Example: `matlab.unittest.Scope.SharedTestFixture`

`Stack` — Stack trace to diagnostic

structure

Stack trace to the location of the diagnostic event, returned as a structure containing the fields `file`, `name`, and `line`.

Data Types: `struct`

`Report` — Diagnostic information
character vector

All diagnostic information, returned as a character vector. The report provides an overall summary of the event.

Data Types: `char`

Methods

Inherited Methods

selectFailed	Return diagnostic records for failed events
selectIncomplete	Return diagnostic records for incomplete events
selectLogged	Return diagnostic records for logged events
selectPassed	Return diagnostic records for passed events

See Also

See Also

matlab.unittest.plugins.DiagnosticsRecordingPlugin | `matlab.unittest.plugins.diagnosticrecord`

Introduced in R2016a

matlab.unittest.plugins.plugindata

Summary of classes in MATLAB Plugin Data Interface

Description

The `plugindata` classes store information about test content for use by the plugins and plugin methods. The `TestRunner` passes instances of these classes to various plugin methods. The `matlab.unittest.plugins.plugindata` package consists of the following MATLAB plugin data classes.

matlab.unittest.plugins.plugindata.FinalizedResultPluginData	Plugin data containing finalized test result information
matlab.unittest.plugins.plugindata.ImplicitFixturePluginData	Plugin data containing test setup and teardown information
matlab.unittest.plugins.plugindata.PluginData	Data object passed to TestRunnerPlugin methods
matlab.unittest.plugins.plugindata.QualificationContext	Context for QualifyingPlugins
matlab.unittest.plugins.plugindata.SharedTestFixturePluginData	Plugin data containing shared test fixture information
matlab.unittest.plugins.plugindata.TestContentCreationPluginData	Plugin data containing test content creation information
matlab.unittest.plugins.plugindata.TestSuiteRunPluginData	Plugin data containing selected test information

See Also

See Also

`matlab.unittest.plugins` | TestRunnerPlugin

matlab.unittest.plugins.plugindata.FinalizedResultPluginData class

Package: matlab.unittest.plugins.plugindata

Plugin data containing finalized test result information

Description

The `FinalizedResultPluginData` class defines the data the `TestRunner` passes to plugin methods related to finalized test results. The `TestRunner` creates this class, so there is no need for test plugin authors to construct the class directly.

Properties

`Index` — Location of result relative to entire suite

scalar numeric

Location of the finalized result relative to the entire suite, represented as a scalar numeric.

`TestSuite` — Specification of the Test element

`matlab.unittest.TestSuite` scalar

Specifies the test that produced the `TestResult`, represented as a `matlab.unittest.TestSuite` scalar.

`TestResult` — Result from finalized test suite element

`matlab.unittest.TestResult` scalar

Result from the finalized test suite element, represented as a `matlab.unittest.TestResult` scalar.

See Also

See Also

TestRunnerPlugin | TestRunnerPlugin.reportFinalizedResult

Introduced in R2015b

matlab.unittest.plugins.plugindata.ImplicitFixturePluginData class

Package: matlab.unittest.plugins.plugindata

Plugin data containing test setup and teardown information

Description

The `ImplicitFixturePluginData` class defines the data the `TestRunner` passes to plugin methods related to setting up and tearing down tests. The `TestRunner` creates this class, so there is no need for test plugin authors to construct this class directly.

Properties

`Name` — Label of test content test runner sets up or tears down

character vector

Label of test content test runner sets up or tears down, represented as a character vector. Use the `Name` property for informational, labeling, and display purposes. Do not use `Name` programmatically to introspect into the content.

Data Types: `char`

`QualificationContext` — Context for plugins to perform qualifications on test content

`matlab.unittest.plugins.plugindata.QualificationContext`

Context for plugins to perform qualifications on test content, represented as an instance of `matlab.unittest.plugins.plugindata.QualificationContext`. For your plugin to use qualifications it must be a subclass of `matlab.unittest.plugins.QualifyingPlugin` and provide this context in the call to one of its qualifications methods.

See Also

See Also

TestRunnerPlugin | TestRunnerPlugin.setupTestClass | TestRunnerPlugin.setupTestMethod | TestRunnerPlugin.teardownTestClass | TestRunnerPlugin.teardownTestMethod

Introduced in R2015a

matlab.unittest.plugins.plugindata.PluginData class

Package: matlab.unittest.plugins.plugindata

Data object passed to TestRunnerPlugin methods

Description

The `PluginData` class defines the data the `TestRunner` passes to various plugin methods. It is created by the `TestRunner`, so there is no need for test plugin authors to construct this class directly.

Properties

`Name`

Label of test content executed by the test runner within the scope of a plugin method, represented as a character vector. Use the `Name` property for informational, labeling, and display purposes. Do not use `Name`programmatically to introspect into the content.

See Also

Introduced in R2014a

matlab.unittest.plugins.plugindata.QualificationContext class

Package: matlab.unittest.plugins.plugindata

Context for QualifyingPlugins

Description

The `QualificationContext` class provides the context required for `QualifyingPlugins` to perform qualifications. The test framework creates this class and stores it as part of the relevant plugin data. There is no need for test plugin authors to construct this class directly.

See Also

See Also

matlab.unittest.plugins.QualifyingPlugin | matlab.unittest.plugins.plugindata.ImplicitFixturePluginData | matlab.unittest.plugins.plugindata.SharedTestFixturePluginData

Introduced in R2015b

matlab.unittest.plugins.plugindata.SharedTestFixturePluginDa class

Package: matlab.unittest.plugins.plugindata

Plugin data containing shared test fixture information

Description

The `SharedTestFixturePluginData` defines the data the `TestRunner` passes to plugin methods related to shared test fixtures. The `TestRunner` creates this, so there is no need for test plugin authors to construct this class directly.

Properties

`Name`

Label of shared test fixture, represented as a character vector. Use the `Name` property for informational, labeling, and display purposes. Do not use `Name`programmatically to introspect into the content.

`Description`

Description of action performed during setup and teardown of a shared test fixture, represented as a character vector

`QualificationContext`

Context for plugins to perform qualifications on fixtures, represented as an instance of `matlab.unittest.plugins.plugindata.QualificationContext`. For your plugin to use qualifications it must be a subclass of `matlab.unittest.plugins.QualifyingPlugin` and provide this context in the call to one of its qualifications methods.

See Also

See Also

matlab.unittest.fixtures.Fixture | TestRunnerPlugin

Introduced in R2014a

matlab.unittest.plugins.plugindata.TestContentCreationPlugin class

Package: matlab.unittest.plugins.plugindata

Plugin data containing test content creation information

Description

The `TestContentCreationPluginData` class defines the data the `TestRunner` passes to plugin methods related to test content creation. The `TestRunner` creates this class, so there is no need for test plugin authors to construct the class directly.

Properties

`Name` — Name of content test runner executes

string scalar

Name of content the test runner executes within the scope of a plugin method, represented as a string scalar. The `Name` property is for informational, labeling, and display purposes, not to introspect into the content the test runner is executing.

See Also

See Also

TestRunnerPlugin

Introduced in R2017a

matlab.unittest.plugins.plugindata.TestSuiteRunPluginData class

Package: matlab.unittest.plugins.plugindata

Plugin data containing selected test information

Description

The `TestSuiteRunPluginData` defines the data the `TestRunner` passes to plugin methods related to running tests from the suite. The `TestRunner` creates this, so there is no need for test plugin authors to construct this class directly.

Properties

`Name`

Name corresponding to the portion of the test suite the runner executes within a plugin method, represented as a character vector. Use the `Name` property for informational, labeling, and display purposes. Do not use `Name` programmatically to introspect into the content.

`TestSuite`

Select test methods, represented as a `matlab.unittest.TestSuite` instance

`TestResult`

Results from running select test methods listed in `TestSuite`, represented as a `matlab.unittest.TestResult` array

See Also

See Also

matlab.unittest.TestSuite | matlab.unittest.TestResult | TestRunnerPlugin

Introduced in R2014a

plus, +

Addition

Syntax

```
C = A + B
C = plus(A,B)
```

Description

`C = A + B` adds arrays `A` and `B` and returns the result in `C`.

`C = plus(A,B)` is an alternate way to execute `A + B`, but is rarely used. It enables operator overloading for classes.

Examples

Add Scalar to Array

Create an array, `A`, and add a scalar value to it.

```
A = [0 1; 1 0];
C = A + 2
```

```
C =

     2     3
     3     2
```

The scalar value is added to each entry of `A`.

Add Two Arrays

Create two arrays, `A` and `B`, and add them together.

```
A = [1 0; 2 4];
```

```
B = [5 9; 2 1];
C = A + B
```

```
C =

     6     9
     4     5
```

The elements of A are added to the corresponding elements of B.

Add Vector to Matrix

Create an array, A, and add a column vector to it. The vector is treated as though it is a matrix of the same size as A, so that each element in the vector is added to a row in A.

```
A = [1 2 3; 4 5 6]
```

```
A =

     1     2     3
     4     5     6
```

```
b = [10; 100]
```

```
b =

    10
   100
```

```
A + b
```

```
ans =

    11    12    13
   104   105   106
```

Concatenate Strings

Create two 1-by-3 string arrays, then concatenate similarly located strings in the arrays.

```
s1 = string({'Red' 'Blue' 'Green'})
```

```
s1 = 1×3 string array
    "Red"    "Blue"    "Green"
```

```
s2 = string({'Truck' 'Sky' 'Tree'})
```

```
s2 = 1×3 string array
    "Truck"    "Sky"    "Tree"
```

```
s = s1 + s2
```

```
s = 1×3 string array
    "RedTruck"    "BlueSky"    "GreenTree"
```

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Datetime, duration, and calendar duration arrays must be the same size unless one is a scalar.

- If one input is a datetime array, duration array, or calendar duration array, then numeric values in the other input are treated as a number of 24-hour days.
- If one input is a string array, then the other input can be a numeric, logical, character, string, or cell array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

B — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. Numeric or string inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Datetime, duration, and calendar duration arrays must be the same size unless one is a scalar.

- If one input is a datetime array, duration array, or calendar duration array, then numeric values in the other input are treated as a number of 24-hour days.
- If one input is a string array, then the other input can be a numeric, logical, character, string, or cell array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cumsum` | `minus` | `sum` | `uplus`

Topics

"Array vs. Matrix Operations"
"Operator Precedence"
"MATLAB Operators and Special Characters"

Introduced before R2006a

pointLocation

Class: DelaunayTri

(Not recommended) Simplex containing specified location

Note: `pointLocation(DelaunayTri)` is not recommended. Use pointLocation(triangulation) instead.

`DelaunayTri` is not recommended. Use delaunayTriangulation instead.

Syntax

```
SI = pointLocation(DT,QX)
SI = pointLocation(DT,QX,QY)
SI = pointLocation(DT,QX,QY,QZ)
[SI, BC] = pointLocation(DT,...)
```

Description

`SI = pointLocation(DT,QX)` returns the indices `SI` of the enclosing simplex (triangle/tetrahedron) for each query point location in `QX`. The enclosing simplex for point `QX(k,:)` is `SI(k)`. `pointLocation` returns `NaN` for all points outside the convex hull.

`SI = pointLocation(DT,QX,QY)` and `SI = pointLocation(DT,QX,QY,QZ)` allow the query point locations to be specified in alternative column vector format when working in 2-D and 3-D.

`[SI, BC] = pointLocation(DT,...)` returns the barycentric coordinates `BC`.

Input Arguments

`DT`	Delaunay triangulation.

QX	Matrix of size mpts-by-ndim, mpts being the number of query points.

Output Arguments

SI	Column vector of length mpts containing the indices of the enclosing simplex for each query point. mpts is the number of query points.
BC	BC is a mpts-by-ndim matrix, each row BC(i,:) represents the barycentric coordinates of QX(i,:) with respect to the enclosing simplex SI(i).

Examples

Example 1

Create a 2-D Delaunay triangulation:

```
X = rand(10,2);
dt = DelaunayTri(X);
```

Find the triangles that contain specified query points:

```
qrypts = [0.25 0.25; 0.5 0.5];
triids = pointLocation(dt, qrypts)
```

Example 2

Create a 3-D Delaunay triangulation:

```
x = rand(10,1);
y = rand(10,1);
z = rand(10,1);
dt = DelaunayTri(x,y,z);
```

Find the triangles that contain specified query points and evaluate the barycentric coordinates:

```
qrypts = [0.25 0.25 0.25; 0.5 0.5 0.5];
```

```
[tetids, bcs] = pointLocation(dt, qrypts)
```

See Also

delaunayTriangulation | nearestNeighbor | triangulation

pol2cart

Transform polar or cylindrical coordinates to Cartesian

Syntax

```
[x,y] = pol2cart(theta,rho)
[x,y,z] = pol2cart(theta,rho,z)
```

Description

`[x,y] = pol2cart(theta,rho)` transforms corresponding elements of the polar coordinate arrays `theta` and `rho` to two-dimensional Cartesian, or *xy*, coordinates.

`[x,y,z] = pol2cart(theta,rho,z)` transforms corresponding elements of the cylindrical coordinate arrays `theta`, `rho`, and `z` to three-dimensional Cartesian, or *xyz*, coordinates.

Examples

Polar to Cartesian Coordinates

Convert the polar coordinates defined by corresponding entries in the matrices `theta` and `rho` to two-dimensional Cartesian coordinates `x` and `y`.

```
theta = [0 pi/4 pi/2 pi]
```

```
theta =

         0    0.7854    1.5708    3.1416
```

```
rho = [5 5 10 10]
```

```
rho =
```

```
     5     5    10    10
```

```
[x,y] = pol2cart(theta,rho)
```

```
x =

    5.0000    3.5355    0.0000  -10.0000


y =

         0    3.5355   10.0000    0.0000
```

Cylindrical to Cartesian Coordinates

Convert the cylindrical coordinates defined by corresponding entries in the matrices `theta`, `rho`, and `z` to three-dimensional Cartesian coordinates `x`, `y`, and `z`.

```
theta = [0 pi/4 pi/2 pi]'
```

```
theta =

         0
    0.7854
    1.5708
    3.1416
```

```
rho = [1 3 4 5]'
```

```
rho =

     1
     3
     4
     5
```

```
z = [7 8 9 10]'
```

```
z =
```

```
     7
     8
     9
    10


[x,y,z] = pol2cart(theta,rho,z)

x =

    1.0000
    2.1213
    0.0000
   -5.0000


y =

         0
    2.1213
    4.0000
    0.0000


z =

     7
     8
     9
    10
```

Input Arguments

`theta` — Angular coordinate

scalar | vector | matrix | multidimensional array

Angular coordinate, specified as a scalar, vector, matrix, or multidimensional array. `theta`, `rho`, and `z` must be the same size, or any of them can be scalar.

`theta` is the counterclockwise angle in the *x*-*y* plane measured in radians from the positive *x*-axis.

Data Types: `single` | `double`
Complex Number Support: Yes

`rho` — Radial coordinate

scalar | vector | matrix | multidimensional array

Radial coordinate, specified as a scalar, vector, matrix, or multidimensional array. `theta`, `rho`, and `z` must be the same size, or any of them can be scalar.

`rho` is the distance from the origin to a point in the *x*-*y* plane.

Data Types: `single` | `double`
Complex Number Support: Yes

`z` — Elevation coordinate

scalar | vector | matrix | multidimensional array

Elevation coordinate, specified as a scalar, vector, matrix, or multidimensional array. `theta`, `rho`, and `z` must be the same size, or any of them can be scalar.

`z` is the height above the *x*-*y* plane.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

`x, y, z` — Cartesian coordinates

arrays

Cartesian coordinates, returned as arrays.

Algorithms

The mapping from polar and cylindrical coordinates to Cartesian coordinates is:



Polar to Cartesian Mapping

```
x = rho*cos(theta)
y = rho*sin(theta)
```



Polar to Cartesian Mapping

```
x = rho*cos(theta)
y = rho*sin(theta)
z = z
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cart2pol` | `cart2sph` | `sph2cart`

Introduced before R2006a

polar

(Not recommended) Polar coordinate plot

Compatibility

`polar` is not recommended. Use `polarplot` instead.

Syntax

```
polar(theta,rho)
polar(theta,rho,LineSpec)
polar(axes_handle,...)
h = polar(...)
```

Description

The `polar` function accepts polar coordinates, plots them in a Cartesian plane, and draws the polar grid on the plane.

`polar(theta,rho)` creates a polar coordinate plot of the angle `theta` versus the radius `rho`. `theta` is the angle from the *x*-axis to the radius vector specified in radians; `rho` is the length of the radius vector specified in dataspace units.

`polar(theta,rho,LineSpec)` `LineSpec` specifies the line type, plot symbol, and color for the lines drawn in the polar plot.

`polar(axes_handle,...)` plots into the axes with the handle `axes_handle` instead of into the current axes (`gca`).

`h = polar(...)` returns the line object in `h`.

Examples

Simple Polar Plot

Create a simple polar plot using a dashed red line.

```
theta = 0:0.01:2*pi;
rho = sin(2*theta).*cos(2*theta);

figure
polar(theta,rho,'--r')
```

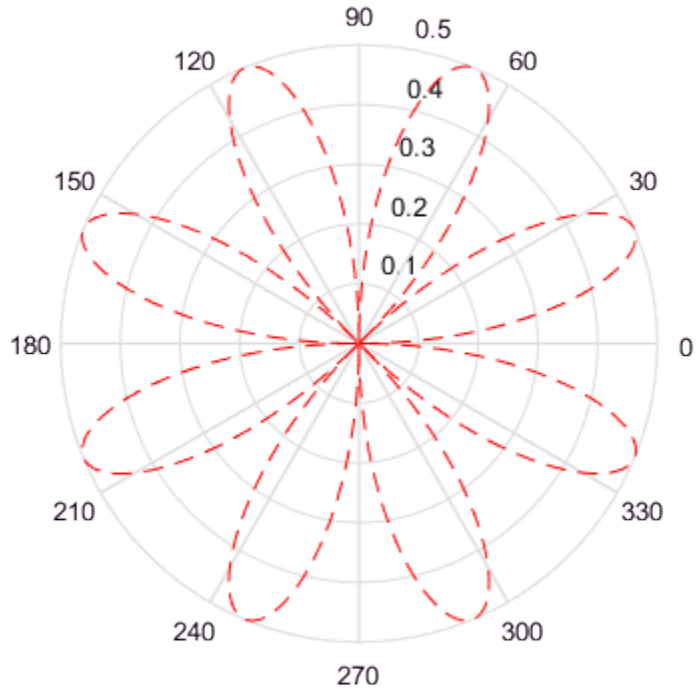

Tips

Negative `r` values reflect through the origin, rotating by `pi` (since `(theta,r)` transforms to `(r*cos(theta), r*sin(theta))`). If you want different behavior, you can

manipulate `r` prior to plotting. For example, you can make `r` equal to `max(0,r)` or `abs(r)`.

See Also

`polarplot` | | | `cart2pol` | `compass` | `pol2cart` | `rose`

Introduced before R2006a

polaraxes

Create polar axes

Syntax

```
pax = polaraxes
pax = polaraxes(Name,Value)

pax = polaraxes(parent, ___ )

polaraxes(pax_in)
```

Description

`pax = polaraxes` creates the default polar axes in the current figure and returns the `PolarAxes` object created. Use `pax` to query and set properties of the `PolarAxes` object. For a list of properties, see PolarAxes Properties.

`pax = polaraxes(Name,Value)` specifies properties for the `PolarAxes` object using one or more name-value pair arguments, for example, `'ThetaDir','clockwise'`.

`pax = polaraxes(parent, ___ )` creates the polar axes in the figure, uipanel, or uitab specified by `parent`, instead of in the current figure. Use this option with any of the input argument combinations in the previous syntaxes.

`polaraxes(pax_in)` makes the `PolarAxes` object `pax_in` the current axes.

Examples

Modify Polar Axes Properties

Create a new figure with polar axes and assign the polar axes object to `pax`. Add a plot to the axes. Then, use `pax` to modify axes properties.

```
figure
```

```
pax = polaraxes;
theta = 0:0.01:2*pi;
rho = sin(2*theta).*cos(2*theta);
polarplot(theta,rho)

pax.ThetaDir = 'clockwise';
pax.FontSize = 12;
```

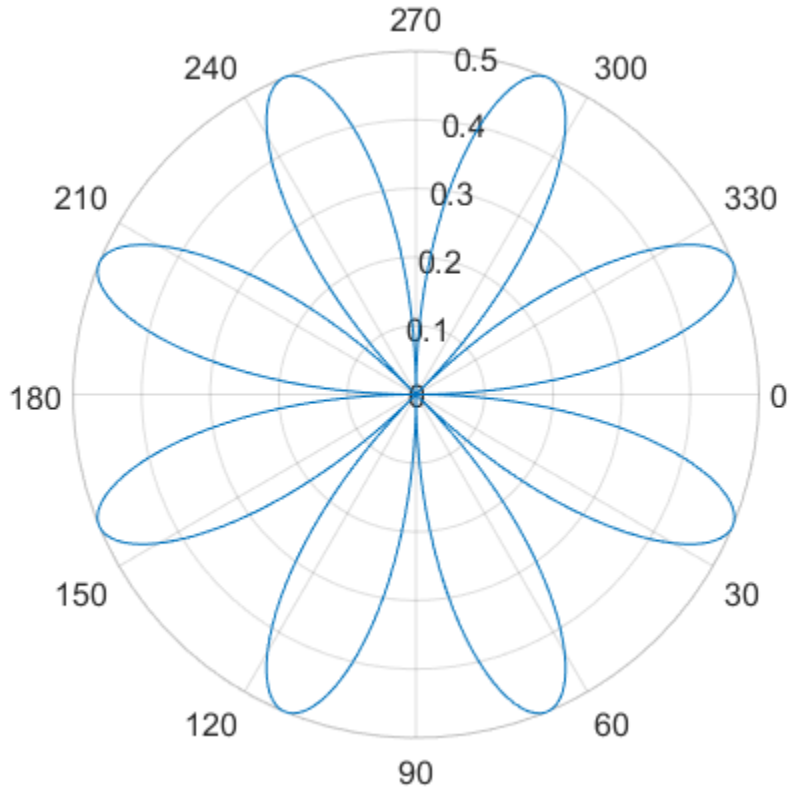

Make Polar Axes Current Axes

Create a figure with polar axes and assign the polar axes object to `pax`. Then, ensure `pax` is the current axes before calling the `polarplot` function.

```
figure
```

```
pax = polaraxes;

polaraxes(pax)
polarplot(1:10)
```

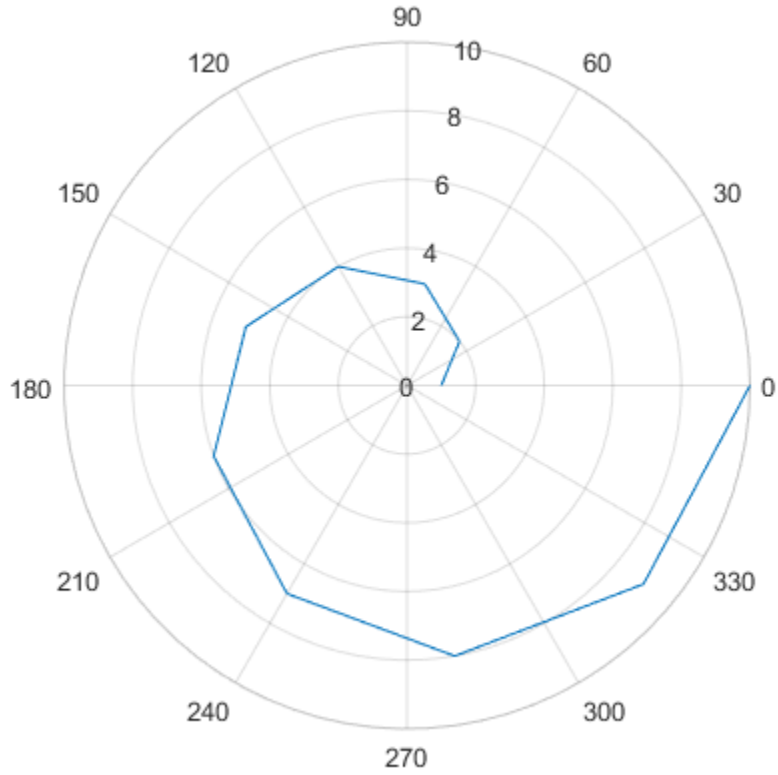

Input Arguments

`parent` — Parent container
figure object | uipanel object | uitab object

Parent container, specified as a figure, uipanel, or uitab object.

pax_in — Polar axes to make current
`PolarAxes` object

Polar axes to make current, specified as a `PolarAxes` object.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are only a subset. For a complete list, see PolarAxes Properties. Some graphics functions reset axes properties when plotting. To avoid graphics functions from overriding the property values, set axes properties after plotting.

Example: `'ThetaZeroLocation','top','ThetaDir','clockwise'`

`'ThetaAxisUnits'` — Units for angle values
`'degrees'` (default) | `'radians'`

Units for angle values, specified as one of these values:

- `'degrees'` — Label the angles in degrees, and interpret the `ThetaLim`, `ThetaTick`, and `RAxisLocation` property values in degrees. When you switch the units from radians to degrees, MATLAB converts the radian values in those three properties to the equivalent degree values.
- `'radians'` — Label the angles in radians, and interpret the `ThetaLim`, `ThetaTick`, and `RAxisLocation` property values in radians. When you switch the units from degrees to radians, MATLAB converts the degree values in those three properties to the equivalent radian values.

Example: `ax.ThetaAxisUnits = 'radians';`

`'ThetaZeroLocation'` — Location of the zero reference axis
`'right'` (default) | `'top'` | `'left'` | `'bottom'`

Location of the zero reference axis, specified as one of the values in this table.

Value	Result
`'right'`	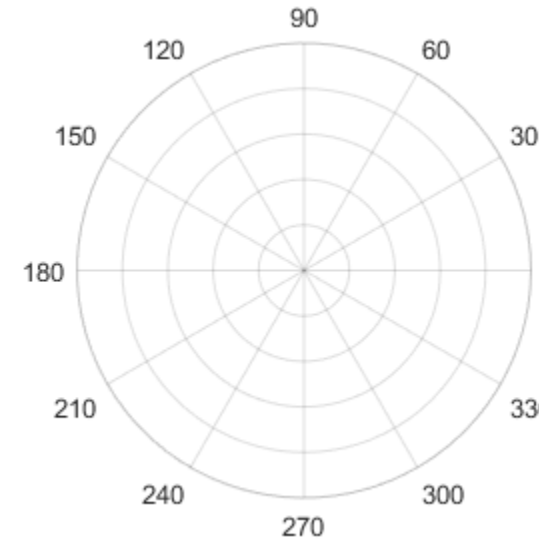
`'top'`	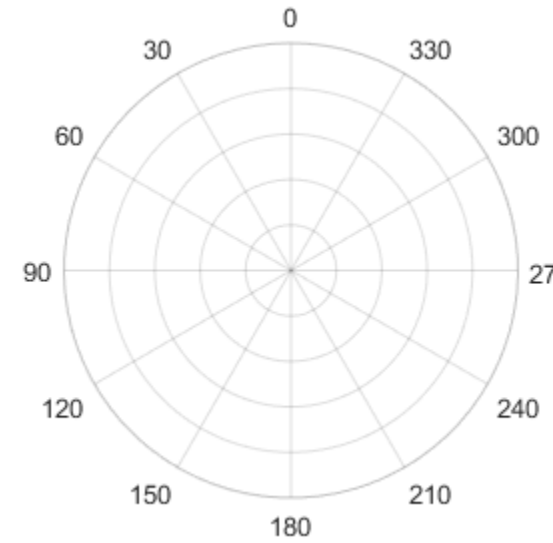

Value	Result
`'left'`	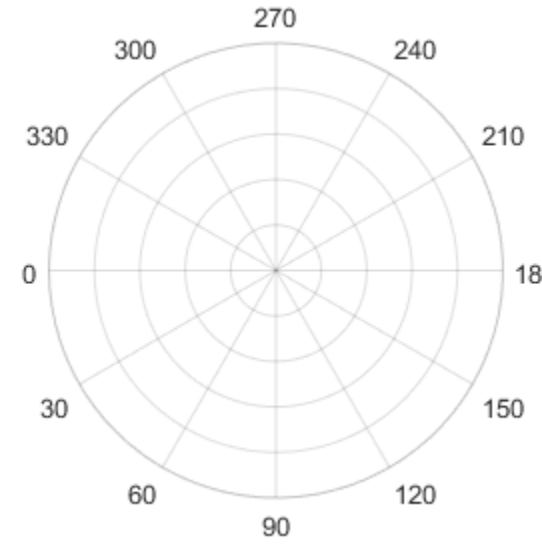
`'bottom'`	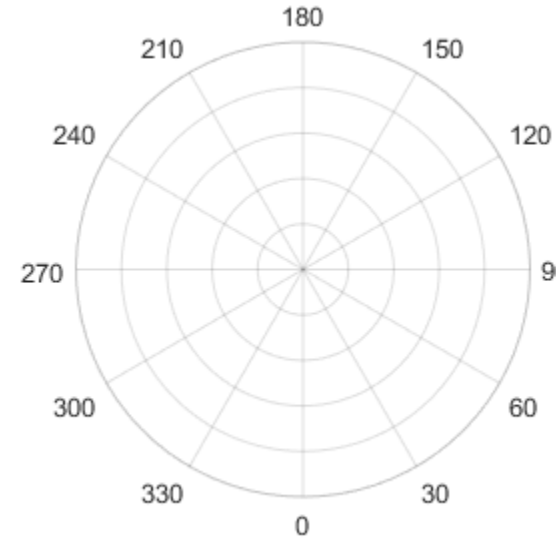

Example: `ax.ThetaZeroLocation = 'left';`

`'ThetaDir'` — Direction of increasing angles
`'counterclockwise'` (default) | `'clockwise'`

Direction of increasing angles, specified as one of the values in this table.

Value	Result
`'counterclockwise'`	Angles increase in a counterclockwise direction. 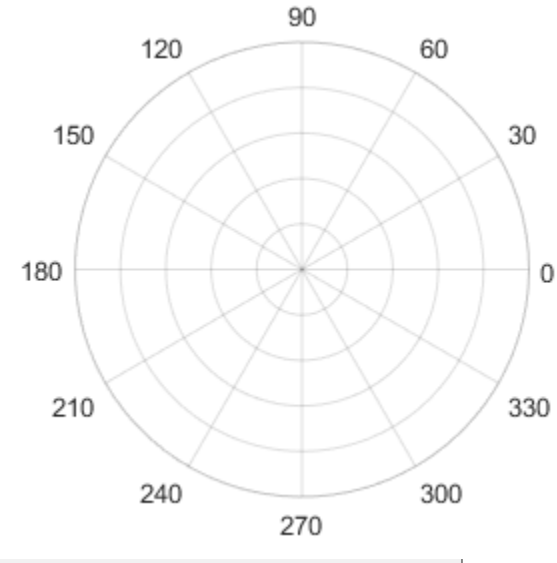
`'clockwise'`	Angles increase in a clockwise direction.

Value	Result
	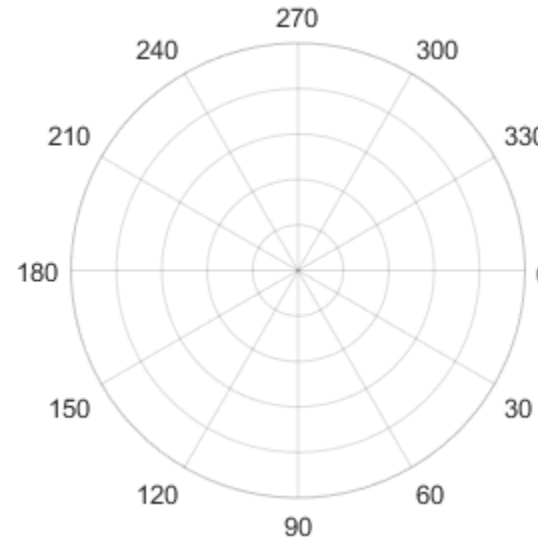

Example: `ax.ThetaDir = 'clockwise';`

`'ThetaLim'` — Minimum and maximum angle values

`[0 360]` (default) | two-element vector of the form `[thmin thmax]`

Minimum and maximum angle values, specified as a two-element vector of the form `[thmin thmax]`. If the difference between the values is less than 360 degrees, then the theta-axis is a partial circle.

MATLAB interprets the values in units determined by the `ThetaAxisUnits` property.

Example: `ax.ThetaLim = [0 180];`

`'ThetaTick'` — Angles at which to display lines

`[0 30 60 ... 300 330 360]` (default) | vector of increasing values

Angles at which to display lines extending from the origin, specified as a vector of increasing values. MATLAB labels the lines with the appropriate angle values, unless you specify different labels using the `ThetaTickLabel` property.

MATLAB interprets the values in units determined by the `ThetaAxisUnits` property.

Example: `ax.ThetaTick = [0 90 180 270];`

`'ThetaColor'` — Color of grid lines, tick marks, and tick labels

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector of color name | `'none'`

Color of grid lines, tick marks, and tick labels for the *theta*-axis, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the grid lines and tick labels are invisible.

Note: If you specify the `GridColor` property, then the grid lines use the color in the `GridColor` property instead. See GridColorMode for more information.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

For example, `ax.ThetaColor = 'r'` changes the color to red.

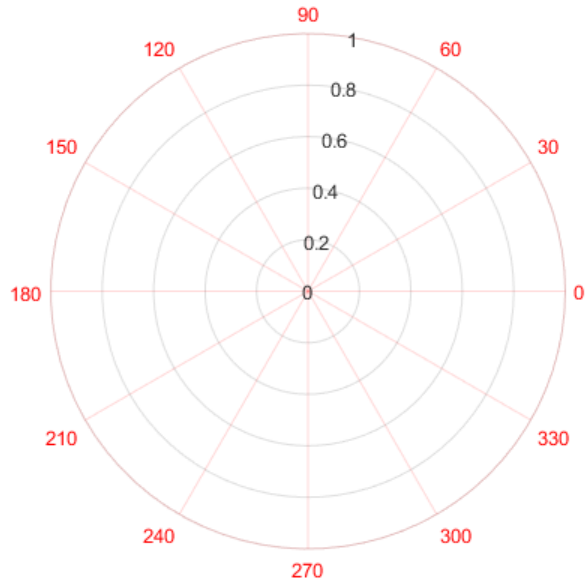

`'RAxisLocation'` — Location of r-axis

80 (default) | scalar angle value

Location of the r-axis, specified a scalar angle value. MATLAB interprets the values in units determined by the `ThetaAxisUnits` property.

Example: `ax.RAxisLocation = 90;`

`'RDir'` — Direction of increasing values along r-axis

`'normal'` (default) | `'reverse'`

Direction of increasing values along the r-axis, specified as one of these values:

- `'normal'` — Values increase outward from the center of the chart. The radius at the origin corresponds to the minimum value stored in the `RLim` property (typically 0).
- `'reverse'` — Values decrease outward from the center of the chart. The radius at the origin corresponds to the maximum value stored in the `RLim` property.

Example: `ax.RDir = 'reverse';`

`'RLim'` — Minimum and maximum radius limits

`[0 1]` (default) | two-element vector of the form `[rmin rmax]`

Minimum and maximum radius limits, specified as a two-element vector of the form `[rmin rmax]`, where `rmax` is a numeric value greater than `rmin`. You can specify both limits, or specify one limit and let the axes automatically calculate the other.

- To automatically set the minimum limit to the minimum data value, specify the first element as `-inf`, for example, `[-inf 0]`.
- To automatically set the maximum limit to the maximum data value, specify the second element as `inf`, for example, `[0 inf]`.

Alternatively, use the `rlim` function to set the limits.

Example: `ax.RLim = [0 6];`

`'RTick'` — Radius values at which to display circular lines

`[0 0.2 0.4 0.6 0.8 1]` (default) | vector of increasing values

Radius values at which to display circular lines, specified as a vector of increasing values. MATLAB labels the lines with the appropriate radius values unless you specify different labels using the `RTickLabel` property.

Example: `ax.RTick = [0 2 4 6];`

`'RColor'` — Color of *r*-axis grid lines, tick marks, and tick labels

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector of color name | `'none'`

Color of *r*-axis grid lines, tick marks, and tick labels, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the grid lines and tick labels are invisible.

Note: If you specify the `GridColor` property, then the grid lines use the color in the `GridColor` property instead. See GridColorMode for more information.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

For example, `ax.RColor = 'r'` changes the color to red.

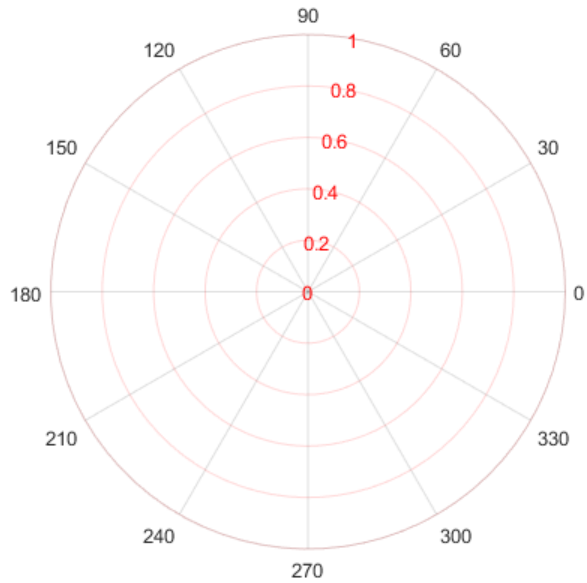

See Also

See Also

PolarAxes Properties | `polarplot` | `rlim`

Introduced in R2016a

PolarAxes Properties

Control polar axes appearance and behavior

Description

`PolarAxes` properties control the appearance and behavior of a `PolarAxes` object. By changing property values, you can modify certain aspects of the polar axes. Set axes properties after plotting since some graphics functions reset axes properties.

Some graphics functions create polar axes when plotting. Use `gca` to access the newly created axes. To create empty polar axes, use the `polaraxes` function.

```
polarplot([0 pi/2 pi],[1 2 3])
ax = gca;
d = ax.ThetaDir
ax.ThetaDir = 'clockwise';
```

Theta-Axis

`ThetaAxisUnits` — Units for angle values
`'degrees'` (default) | `'radians'`

Units for angle values, specified as one of these values:

- `'degrees'` — Label the angles in degrees, and interpret the `ThetaLim`, `ThetaTick`, and `RAxisLocation` property values in degrees. When you switch the units from radians to degrees, MATLAB converts the radian values in those three properties to the equivalent degree values.
- `'radians'` — Label the angles in radians, and interpret the `ThetaLim`, `ThetaTick`, and `RAxisLocation` property values in radians. When you switch the units from degrees to radians, MATLAB converts the degree values in those three properties to the equivalent radian values.

Example: `ax.ThetaAxisUnits = 'radians';`

`ThetaZeroLocation` — Location of the zero reference axis
`'right'` (default) | `'top'` | `'left'` | `'bottom'`

Location of the zero reference axis, specified as one of the values in this table.

Value	Result
`'right'`	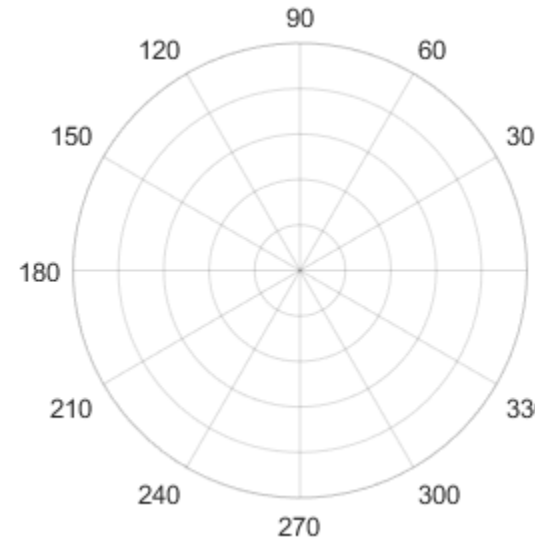
`'top'`	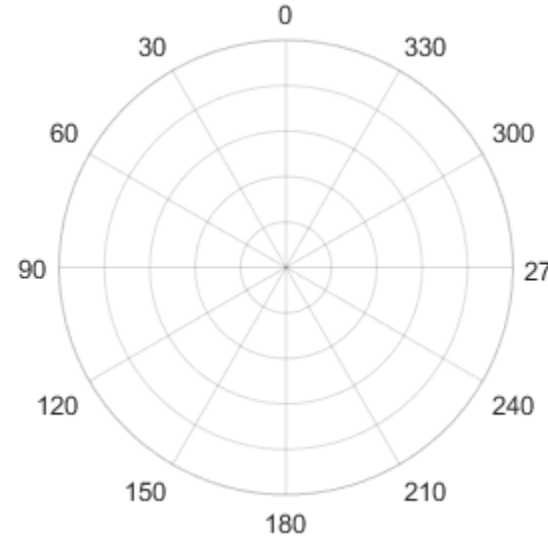

Value	Result
`'left'`	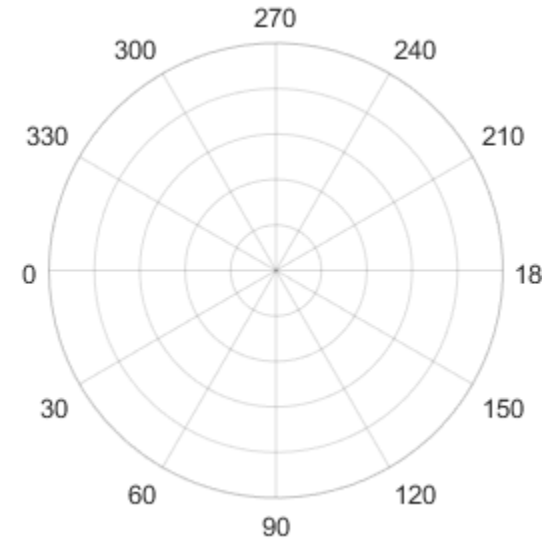
`'bottom'`	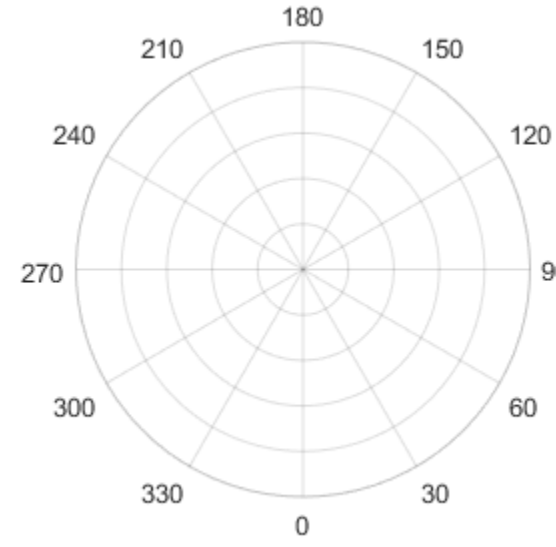

Example: `ax.ThetaZeroLocation = 'left';`

`ThetaDir` — Direction of increasing angles

`'counterclockwise'` (default) | `'clockwise'`

Direction of increasing angles, specified as one of the values in this table.

Value	Result
`'counterclockwise'`	Angles increase in a counterclockwise direction. 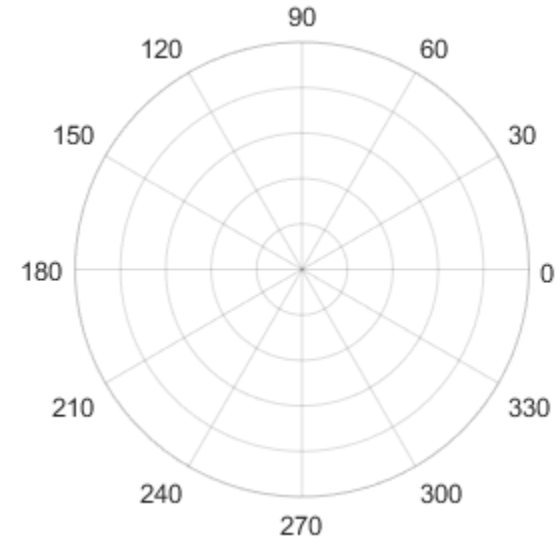
`'clockwise'`	Angles increase in a clockwise direction.

Value	Result
	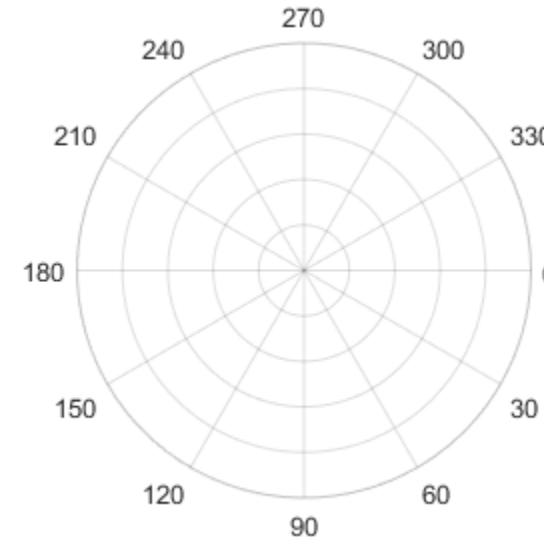

Example: `ax.ThetaDir = 'clockwise';`

`ThetaLim` — Minimum and maximum angle values

`[0 360]` (default) | two-element vector of the form `[thmin thmax]`

Minimum and maximum angle values, specified as a two-element vector of the form `[thmin thmax]`. If the difference between the values is less than 360 degrees, then the theta-axis is a partial circle.

MATLAB interprets the values in units determined by the `ThetaAxisUnits` property.

Example: `ax.ThetaLim = [0 180];`

`ThetaLimMode` — Selection mode for `ThetaLim`

`'auto'` (default) | `'manual`

Selection mode for the `ThetaLim` property value, specified as one of these values:

- `'auto'` — Automatically select the property value.
- `'manual'` — Use the specified property value. To specify the value, set the `ThetaLim` property.

ThetaTick — Angles at which to display lines

`[0 30 60 ... 300 330 360]` (default) | vector of increasing values

Angles at which to display lines extending from the origin, specified as a vector of increasing values. MATLAB labels the lines with the appropriate angle values, unless you specify different labels using the `ThetaTickLabel` property.

MATLAB interprets the values in units determined by the `ThetaAxisUnits` property.

Example: `ax.ThetaTick = [0 90 180 270];`

ThetaTickMode — Selection mode for ThetaTick

`'auto'` (default) | `'manual'`

Selection mode for the `ThetaTick` property value, specified as one of these values:

- `'auto'` — Automatically select the property value.
- `'manual'` — Use the specified property value. To specify the value, set the `ThetaTick` property.

ThetaTickLabel — Labels for angle lines

`{'0'; '30'; '60'; ... '300'; '330'; '360'}` (default) | cell array of character vectors | string array

Labels for angle lines, specified as a cell array of character vectors or a string array.

If you do not specify enough labels for all the lines, then the labels repeat. Labels support TeX and LaTeX markup. See the TickLabelInterpreter property for more information.

Example: `ax.ThetaTickLabel = {'right','top','left','bottom'};`

ThetaTickLabelMode — Selection mode for ThetaTickLabel

`'auto'` (default) | `'manual'`

Selection mode for the `ThetaTickLabel` property value, specified as one of these values:

- `'auto'` — Automatically select the property value.
- `'manual'` — Use the specified property value. To specify the value, set the `ThetaTickLabel` property.

ThetaMinorTick — Display of minor tick marks between angle lines

`'off'` (default) | `'on'`

Display of minor tick marks between angle lines, specified as one of these values:

- `'off'` — Do not display minor tick marks.
- `'on'` — Display minor tick marks. The space between the lines determines the number of minor tick marks. This property value has a visual effect only if the tick length is positive. To set the tick length, use the `TickLength` property, for example, `ax.TickLength = [0.02 0]`.

`ThetaColor` — Color of grid lines, tick marks, and tick labels

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector of color name | `'none'`

Color of grid lines, tick marks, and tick labels for the *theta*-axis, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the grid lines and tick labels are invisible.

Note: If you specify the `GridColor` property, then the grid lines use the color in the `GridColor` property instead. See GridColorMode for more information.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

For example, `ax.ThetaColor = 'r'` changes the color to red.

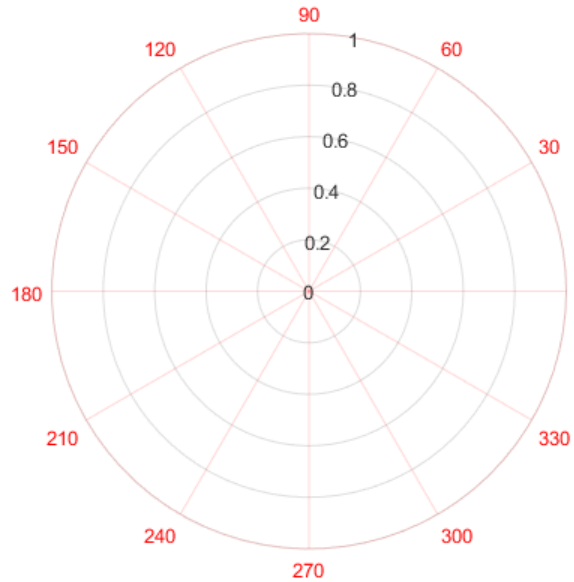

`ThetaColorMode` — Selection mode for *theta*-axis color

`'auto'` (default) | `'manual'`

Selection mode for *theta*-axis color, specified as one of these values:

- `'auto'` — Use the default color value of `[.15 .15 .15]`.
- `'manual'` — Use a color value that you specify. To specify the color, set the `ThetaColor` property.

`ThetaAxis` — Component that controls appearance and behavior of theta-axis

numeric ruler object (default)

Component that controls the appearance and behavior of the theta-axis, returned as a numeric ruler object. When MATLAB creates polar axes, it automatically creates a numeric ruler for the theta-axis. Modify the appearance and behavior of this axis by accessing the associated ruler and setting ruler properties. For a list of options, see Numeric Ruler Properties.

For example, change the color of the theta-axis to red.

```
ax = polaraxes;
```

```
ax.ThetaAxis.Color = 'r';
```

Use the `ThetaAxis` property to access the ruler object and set ruler properties. If you want to set polar axes properties, set them directly on the `PolarAxes` object.

R-Axis

`RAxisLocation` — Location of r-axis

`80` (default) | scalar angle value

Location of the r-axis, specified a scalar angle value. MATLAB interprets the values in units determined by the `ThetaAxisUnits` property.

Example: `ax.RAxisLocation = 90;`

`RAxisLocationMode` — Selection mode for `RAxisLocation`

`'auto'` (default) | `'manual'`

Selection mode for the `RAxisLocation` property value, specified as one of these values:

- `'auto'` — Automatically select the property value.
- `'manual'` — Use the specified property value. To specify the value, set the `RAxisLocation` property.

`RDir` — Direction of increasing values along r-axis

`'normal'` (default) | `'reverse'`

Direction of increasing values along the r-axis, specified as one of these values:

- `'normal'` — Values increase outward from the center of the chart. The radius at the origin corresponds to the minimum value stored in the `RLim` property (typically 0).
- `'reverse'` — Values decrease outward from the center of the chart. The radius at the origin corresponds to the maximum value stored in the `RLim` property.

Example: `ax.RDir = 'reverse';`

`RLim` — Minimum and maximum radius limits

`[0 1]` (default) | two-element vector of the form `[rmin rmax]`

Minimum and maximum radius limits, specified as a two-element vector of the form `[rmin rmax]`, where `rmax` is a numeric value greater than `rmin`. You can specify both limits, or specify one limit and let the axes automatically calculate the other.

- To automatically set the minimum limit to the minimum data value, specify the first element as `-inf`, for example, `[-inf 0]`.
- To automatically set the maximum limit to the maximum data value, specify the second element as `inf`, for example, `[0 inf]`.

Alternatively, use the `rlim` function to set the limits.

Example: `ax.RLim = [0 6];`

`RLimMode` — Selection mode for `RLim`

`'auto'` (default) | `'manual`

Selection mode for the `RLim` property value, specified as one of these values:

- `'auto'`— Automatically set the property value.
- `'manual'`— Use the specified property value. To specify the value, set the `RLim` property.

`RTick` — Radius values at which to display circular lines

`[0 0.2 0.4 0.6 0.8 1]` (default) | vector of increasing values

Radius values at which to display circular lines, specified as a vector of increasing values. MATLAB labels the lines with the appropriate radius values unless you specify different labels using the `RTickLabel` property.

Example: `ax.RTick = [0 2 4 6];`

`RTickMode` — Selection mode for `RTick`

`'auto'` (default) | `'manual'`

Selection mode for the `RTick` property value, specified as one of these values:

- `'auto'` — Automatically select the property value.
- `'manual'` — Use the specified property value. To specify the value, set the `RTick` property.

`RTickLabel` — Labels for *r*-axis tick values and grid lines

`{'0'; '0.2'; '0.4'; '0.6'; '0.8'; '1'}` (default) | cell array of character vectors | string array

Labels for *r*-axis tick values and grid lines, specified as a cell array of character vectors or a string array. If you do not specify enough labels for all the lines, then the labels repeat.

Labels support TeX and LaTeX markup. See the TickLabelInterpreter property for more information.

Example: `ax.RTickLabel = {'one','two','three','four'};`

`RTickLabelMode` — Selection mode for `RTickLabel`

`'auto'` (default) | `'manual'`

Selection mode for the `RTickLabel` property value, specified as one of these values:

- `'auto'` — Automatically select the property value.
- `'manual'` — Use a property value that you specify. To specify the value, set the `RTickLabel` property.

`RTickLabelRotation` — Rotation of *r*-axis tick labels

`0` (default) | scalar value in degrees

Rotation of *r*-axis tick labels, specified as a scalar value in degrees. Positive values give counterclockwise rotation. Negative values give clockwise rotation.

Example: `ax.RTickLabelRotation = 45;`

`RMinorTick` — Display of minor tick marks along *r*-axis

`'off'` (default) | `'on'`

Display of minor tick marks along *r*-axis, specified as one of these values:

- `'off'` — Do not display minor tick marks.
- `'on'` — Display minor tick marks. The space between the major tick marks and grid lines determines the number of minor tick marks. This property value has a visual effect only if the tick length is positive (controlled by the `TickLength` property) and if the polar axes is a full circle (controlled by the `ThetaLim` property).

Example: `ax.RMinorTick = 'on';`

`RColor` — Color of *r*-axis grid lines, tick marks, and tick labels

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector of color name | `'none'`

Color of *r*-axis grid lines, tick marks, and tick labels, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the grid lines and tick labels are invisible.

Note: If you specify the `GridColor` property, then the grid lines use the color in the `GridColor` property instead. See GridColorMode for more information.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

For example, `ax.RColor = 'r'` changes the color to red.

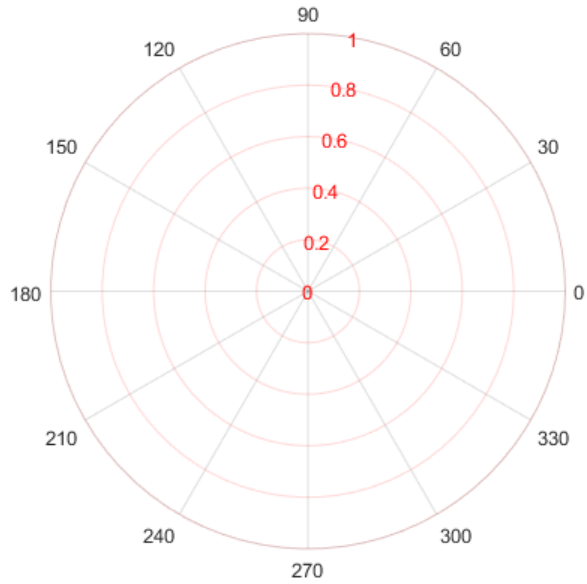

`RColorMode` — Selection mode for *r*-axis color

`'auto'` (default) | `'manual'`

Selection mode for the *r*-axis color, specified one of these values:

- `'auto'` — Use the default color value of `[0.15 0.15 0.15]`.
- `'manual'` — Use a color value that you specify. To specify the color, set the `RColor` property.

`RAxis` — Component that controls appearance and behavior of r-axis

numeric ruler object (default)

Component that controls the appearance and behavior of the *r*-axis, returned as a numeric ruler object. When MATLAB creates polar axes, it automatically creates a numeric ruler for the *r*-axis. Modify the appearance and behavior of this axis by accessing the associated ruler and setting ruler properties. For a list of options, see Numeric Ruler Properties.

For example, change the color of the *r*-axis to red.

```
ax = polaraxes;
```

```
ax.RAxis.Color = 'r';
```

Use the `RAxis` properties to access the ruler objects and set ruler properties. If you want to set polar axes properties, set them directly on the `PolarAxes` object.

Appearance

`Color` — Background color

`[1 1 1]` (default) | RGB triplet | character vector | `'none'`

Background color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the polar axes are invisible and the figure color shows through.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `ax.Color = 'none'`

`Box` — Outline around polar axes

`'off'` (default) | `'on'`

Outline around the polar axes, specified as either `'on'` or `'off'`. The difference between the values is most noticeable when the *theta*-axis limits do not span 360 degrees.

Value	Result
`'on'`	Display the full outline around the polar axes. 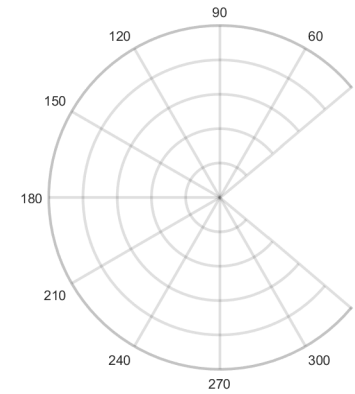
`'off'`	Do not display the full outline around the polar axes. 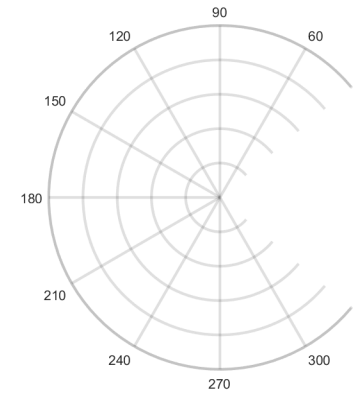

Example: `ax.Box = 'on'`

`LineWidth` — Width of circular and angle lines

`0.5` (default) | scalar value

Width of circular and angle lines, specified as a scalar value in point units. One point equals 1/72 inch.

Example: `ax.LineWidth = 1.5`

`TickLength` — Tick mark length

`[0 0]` (default) | two-element vector

Tick mark length, specified as a two-element vector. The first element determines the tick length. The second element is ignored.

Example: `ax.TickLength = [0.02 0];`

`TickDir` — Tick mark direction

`'in'` (default) | `'out'` | `'both'`

Tick mark direction, specified as one of these values:

- `'in'` — Direct the tick marks inward from the axes outline.
- `'out'` — Direct the tick marks outward from the axes outline.
- `'both'` — Center the tick marks over the axes outline.

Example: `ax.TickDir = 'out';`

`TickDirMode` — Selection mode for `TickDir`

`'auto'` (default) | `'manual'`

Selection mode for the `TickDir` property, specified as one of these values:

- `'auto'` — Use default tick direction.
- `'manual'` — Use manually specified tick mark direction. To specify the tick mark direction, set the `TickDir` property.

Example: `ax.TickDirMode = 'auto'`

`TickLabelInterpreter` — Interpretation of characters in tick labels

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of tick label characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.

- `'latex'` — Interpret characters using a subset of LaTeX markup. When you specify the tick labels, use dollar signs around each element in the cell array.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the style and color, and include special characters in the label.

This table lists the supported modifiers when the `TickLabelInterpreter` property is set to `'tex'`, which is the default value. Modifiers remain in effect until the end of the text, except for superscripts and subscripts which only modify the next character or the text within the curly braces `{}`.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (rarely available)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Set `specifier` as the name of a font family to change the font style. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Set `specifier` as a scalar numeric value to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`,	`'\color{magenta} text'`

Modifier	Description	Example
	`black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	
`\color[rgb] {specifier}`	Set `specifier` as a three-element RGB triplet to change the font color.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒
`\lambda`	λ	`\Phi`	Φ	`\downarrow`	↓
`\mu`	μ	`\Psi`	Ψ	`\circ`	°
`\nu`	ν	`\Omega`	Ω	`\pm`	±
`\xi`	ξ	`\forall`	∀	`\geq`	≥
`\pi`	π	`\exists`	∃	`\propto`	∝

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	′
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `TickLabelInterpreter` property to `'latex'`. When you specify the tick labels, use dollar signs around each element in the cell array, for example:

```
ax = polaraxes;
ax.ThetaTickLabels = {'$\sum_1^n$','$\int_1^n$','$\frac{1}{2}$'};
ax.TickLabelInterpreter = 'latex';
```

The displayed labels uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup. The maximum size of the labels that you can use with the LaTeX interpreter is 1200 characters. For multiline labels, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

Grid Lines

`ThetaGrid` — Display of *theta*-axis grid lines

`'on'` (default) | `'off'`

Display of *theta*-axis grid lines, specified as one of the values in this table.

Value	Result
`'on'`	Display the lines. 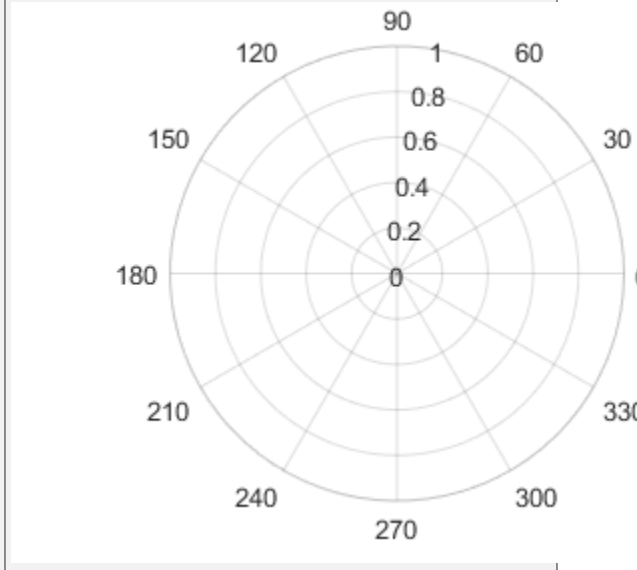
`'off'`	Do not display the lines.

Value	Result
	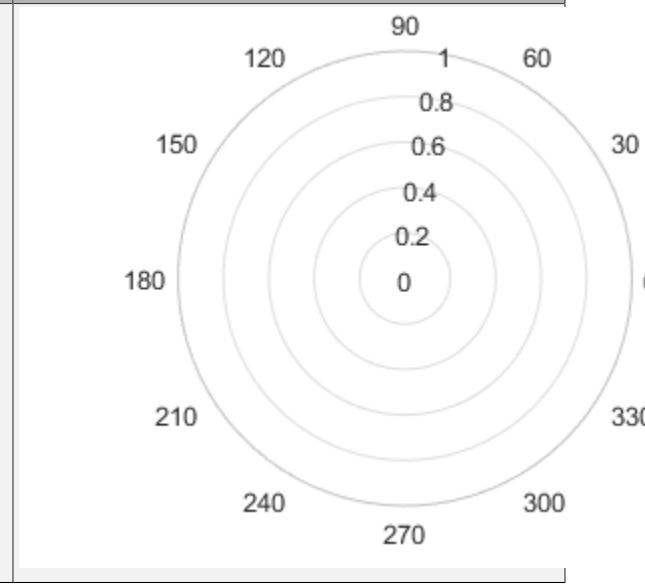

Example: `ax.ThetaGrid = 'off';`

`RGrid` — Display of *r*-axis grid lines
`'on'` (default) | `'off'`

Display of *r*-axis grid lines, specified as one of the values in this table.

Value	Result
`'on'`	Display the lines.

Value	Result
	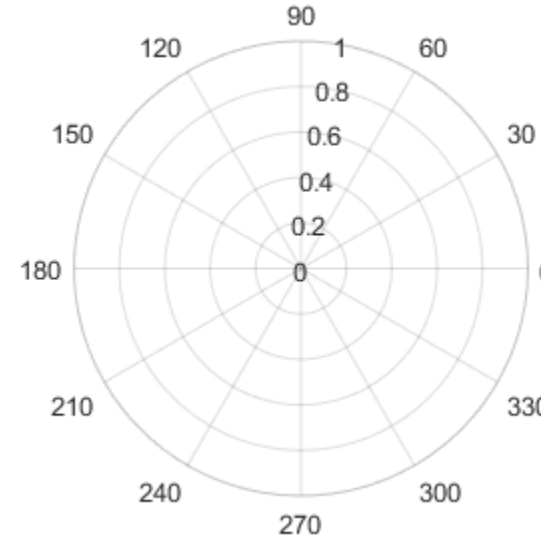
`'off'`	Do not display the lines. 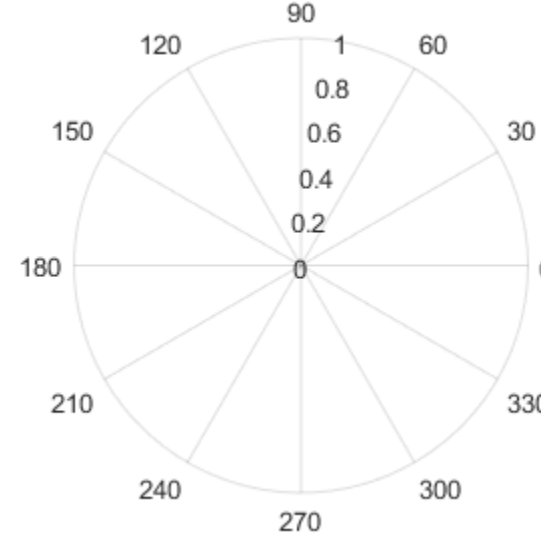

Example: `ax.RGrid = 'off';`

`ThetaMinorGrid` — Display of *theta*-axis minor grid lines
`'off'` (default) | `'on'`

Display of *theta*-axis minor grid lines, specified as one of the values in this table.

Value	Result
`'on'`	Display the lines. 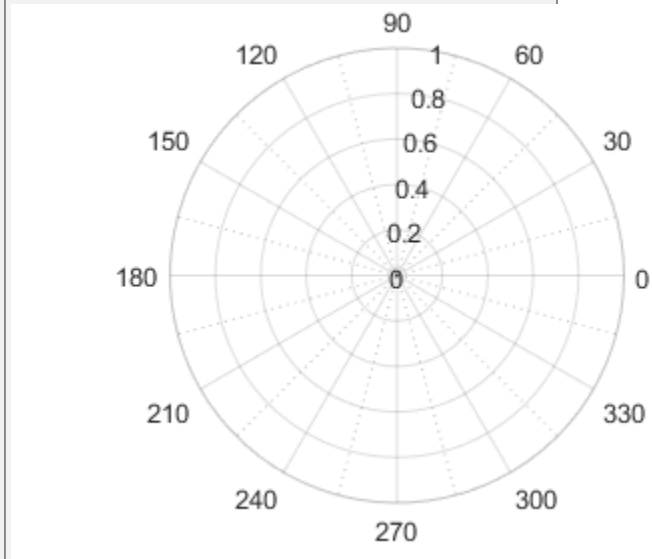
`'off'`	Do not display the lines.

Value	Result
	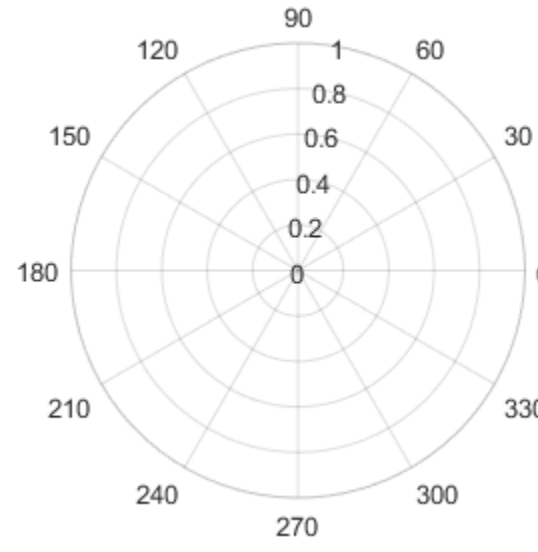

Example: `ax.ThetaMinorGrid = 'on';`

`RMinorGrid` — Display of *r*-axis minor grid lines

`'off'` (default) | `'on'`

Display of *r*-axis minor grid lines, specified as one of the values in this table.

Value	Result
`'on'`	Display the lines.

Value	Result
	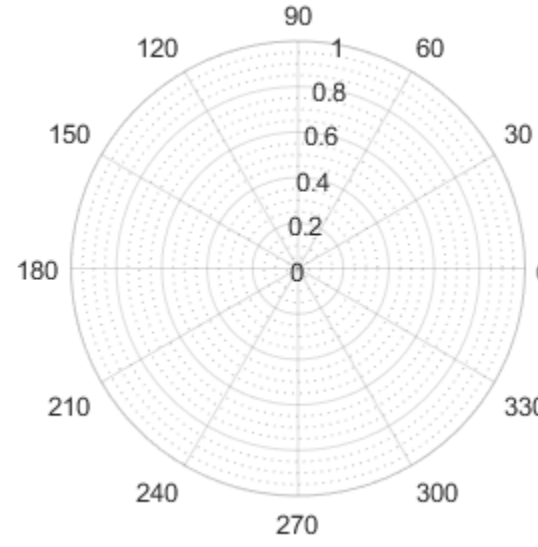
`'off'`	Do not display the lines. 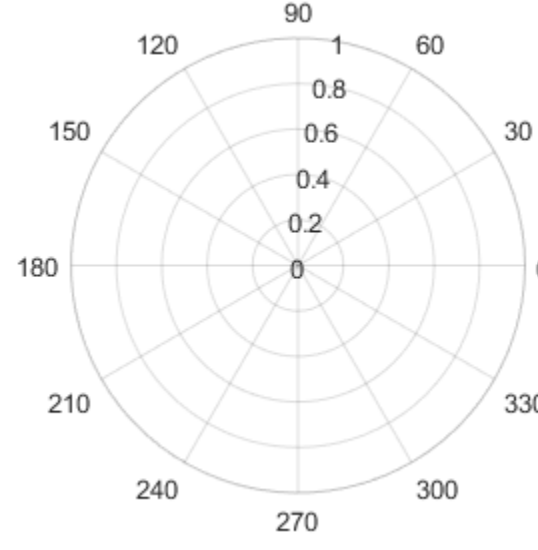

Example: `ax.RMinorGrid = 'on';`

`GridLineStyle` — Line style for grid lines

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style used for grid lines, specified as one of the line styles in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

To display grid lines, use the `grid on` command or set the `ThetaGrid` or `RGrid` property to `'on'`.

Example: `ax.GridLineStyle = '--';`

`MinorGridLineStyle` — Line style for minor grid lines

`':'` (default) | `'-'` | `'--'` | `'-.'` | `'none'`

Line style used for minor grid lines, specified as one of the line styles in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

To display the grid lines, use the `grid minor` command or set the `ThetaMinorGrid` or `RMinorGrid` property to `'on'`.

Example: `ax.MinorGridLineStyle = '-.';`

`GridColor` — Color of grid lines

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector of color name | `'none'`

Color of the grid lines, specified as an RGB triplet, a character vector of a color name, or `'none'`. The actual grid color depends on the values of the `GridColorMode`, `ThetaColorMode`, and `RColorMode` properties. See GridColorMode for more information.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `ax.GridColor = [0 0 1]`

Example: `ax.GridColor = 'b'`

Example: `ax.GridColor = 'blue'`

`GridColorMode` — Selection mode for grid color

`'auto'` (default) | `'manual'`

Selection mode for the grid color, specified as either `'auto'` or `'manual'`.

The actual grid color depends on the values of the `GridColorMode`, `ThetaColorMode`, and `RColorMode` properties. These tables list the grid line colors for different combinations of color modes.

GridColorMode Property	ThetaColorMode Property	*theta*-Axis Grid Line Color
'auto'	'auto'	Use GridColor property.
	'manual'	Use ThetaColor property.
'manual'	'auto'	Use GridColor property.
	'manual'	Use GridColor property.

GridColorMode Property	RColorMode Property	*r*-Axis Grid Line Color
'auto'	'auto'	Use GridColor property.
	'manual'	Use RColor property.
'manual'	'auto'	Use GridColor property.
	'manual'	Use GridColor property.

MinorGridColor — Color of minor grid lines

[0.1 0.1 0.1] (default) | RGB triplet | character vector of color name

Color of minor grid lines, specified as an RGB triplet, a character vector of a color name, or 'none'. The actual grid color depends on the values of the MinorGridColorMode, ThetaColorMode, and RColorMode properties. See MinorGridColorMode for more information.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]

Long Name	Short Name	RGB Triplet
'black'	'k'	[0 0 0]

Example: ax.MinorGridColor = [0 0 1]

Example: ax.MinorGridColor = 'b'

Example: ax.MinorGridColor = 'blue'

MinorGridColorMode — Selection mode for minor grid line color

'auto' (default) | 'manual'

Selection mode for the minor grid line color, specified as either 'auto' or 'manual'.

The actual minor grid line color depends on the values of the MinorGridColorMode, ThetaColorMode, and RColorMode properties. These tables list the minor grid line colors for different combinations of color modes.

MinorGridColorMode Property	ThetaColorMode Property	*theta*-Axis Minor Grid Line Color
'auto'	'auto'	Use MionrGridColor property.
	'manual'	Use ThetaColor property.
'manual'	'auto'	Use MinorGridColor property.
	'manual'	Use MinorGridColor property.

MinorGridColorMode Property	RColorMode Property	*r*-Axis Minor Grid Line Color
'auto'	'auto'	Use MinorGridColor property.
	'manual'	Use RColor property.
'manual'	'auto'	Use MinorGridColor property.
	'manual'	Use MinorGridColor property.

GridAlpha — Grid-line transparency

0.15 (default) | value in the range [0,1]

Grid-line transparency, specified as a value in the range [0,1]. A value of 1 means opaque and a value of 0 means completely transparent.

Example: ax.GridAlpha = 0.5

GridAlphaMode — Selection mode for GridAlpha

'auto' (default) | 'manual'

Selection mode for the GridAlpha property, specified as one of these values:

- 'auto' — Use default transparency value of 0.15.
- 'manual' — Use the manually specified transparency value. To specify the value, set the GridAlpha property.

Example: ax.GridAlphaMode = 'auto'

MinorGridAlpha — Minor grid line transparency

0.25 (default) | value in the range [0,1]

Minor grid line transparency, specified as a value in the range [0,1]. A value of 1 means opaque and a value of 0 means completely transparent.

Example: ax.MinorGridAlpha = 0.5

MinorGridAlphaMode — Selection mode for MinorGridAlpha

'auto' (default) | 'manual'

Selection mode for the MinorGridAlpha property, specified as one of these values:

- 'auto' — Use the default transparency value of 0.25.
- 'manual' — Use the manually specified transparency value. To specify the value, set the MinorGridAlpha property.

Example: ax.MinorGridAlphaMode = 'auto'

Layer — Placement of grid lines and tick marks in relation to graphic objects

'bottom' (default) | 'top'

Placement of grid lines and tick marks in relation to graphic objects, specified as one of these values:

- `'bottom'` — Display tick marks and grid lines under graphics objects.
- `'top'` — Display tick marks and grid lines over graphics objects.

This property affects only 2-D views.

Example: `ax.Layer = 'top'`

Font Style

`FontName` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`FontSize` — Font size

`10` (default) | scalar numeric value

Font size, specified as a scalar numeric value. The `FontSize` and `TitleFontSizeMultiplier` properties determine the size of the text used for the axis labels and the title. The `FontUnits` property determines the units used to interpret the font size.

Example: `ax.FontSize = 12`

`FontUnits` — Font size units

`'points'` (default) | `'inches'` | `'centimeters'` | `'normalized'` | `'pixels'`

Font size units, specified as one of the values in this table.

Units	Description
`'points'`	Points. One point equals 1/72 inch.
`'inches'`	Inches.
`'centimeters'`	Centimeters.

Units	Description
`'normalized'`	Interpret font size as a fraction of the axes height. If you resize the axes, the font size modifies accordingly. For example, if the `FontSize` is `0.1` in normalized units, then the text is 1/10 of the height value stored in the axes `Position` property.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

If you set both the font size and the font units in one function call, you must set the `FontUnits` property first so that the axes correctly interprets the specified font size.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font might look the same as the normal font.

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

`FontSmoothing` — Text smoothing

`'on'` (default) | `'off'`

Text smoothing, specified as one of these values:

- `'on'` — Use antialiasing to make text appear smoother on the screen.
- `'off'` — Do not use antialiasing. Use this setting if the text seems blurry. In certain cases, smoothed text blends against the background color and results in a blurring effect.

Example: `ax.FontSmoothing = 'off'`

`TitleFontWeight` — Thickness of title text

`'bold'` (default) | `'normal'`

Thickness of the title text, specified as one of these values:

- `'bold'` — Thicker characters outlines than normal.
- `'normal'` — Default weight as defined by the particular font.

Example: `ax.TitleFontWeight = 'normal'`

`TitleFontSizeMultiplier` — Scale factor for title font size

`1.1` (default) | numeric value greater than 0

Scale factor for title font size, specified as a numeric value greater than 0. The polar axes applies this scale factor to the value of the `FontSize` property to determine the font size for the title.

Example: `ax.TitleFontSizeMultiplier = 1.75`

Title and Legend

`Title` — Text object for axes title

text object (default)

Text object for axes title. To add a title, set the `String` property of the text object. To change the title appearance, such as the font style or color, set other properties. For a list, see Text Properties.

```
ax = polaraxes;
ax.Title.String = 'My Title';
ax.Title.Color = 'red';
```

Alternatively, use the `title` to add a title and control the appearance.

```
title('My Title','Color','red')
```

`Legend` — Legend associated with the axes

`empty GraphicsPlaceholder` (default) | legend object

This property is read-only.

Legend associated with the axes, specified as a legend object. You can use this property to determine if the axes has a legend.

```
ax = gca;
lgd = ax.Legend
if ~isempty(lgd)
    disp('Legend Exists')
end
```

You also can use this property to access properties of an existing legend. For a list of properties, see Legend Properties.

```
polarplot(1:10)
legend({'Line 1'},'FontSize',12)
ax = gca;
ax.Legend.TextColor = 'red';
```

Line Colors and Line Styles

`ColorOrder` — Colors for multiline plots

seven predefined colors (default) | three-column matrix of RGB triplets

Colors for multiline plots, specified as a three-column matrix of RGB triplets. Each row of the matrix defines one color in the color order. The default color order has seven colors

Default Color Order	Associated RGB Triplets
	[0 0.4470 0.7410 0.8500 0.3250 0.0980 0.9290 0.6940 0.1250 0.4940 0.1840 0.5560 0.4660 0.6740 0.1880 0.3010 0.7450 0.9330 0.6350 0.0780 0.1840]

Some graphics functions reset this property to the default value before plotting. To specify the color order, you can change the default value before plotting. For example, this code changes the default value for all future axes.

```
co = [1    0  0.4
    0.8  0.2  0.5
    0.6  0.4  0.6
    0.4  0.6  0.7
    0.2  0.8  0.8
      0    1  0.9];
set(groot,'defaultAxesColorOrder',co)
```

`ColorOrderIndex` — Next color to use in color order

1 (default) | positive integer

Next color to use in the color order, specified as a positive integer. For example, if this property is set to `1`, then the next plot added to the axes uses the first color in the color order. If the index value exceeds the number of colors in the color order, then the index value modulo the number of colors determines the next color used.

If you used a `hold on` command or if the `NextPlot` property of the axes is set to `'add'`, then the color order index value increases every time a new plot is added. Reset the color order by setting the `ColorOrderIndex` property to `1`.

Example: `ax.ColorOrderIndex = 5`

`LineStyleOrder` — Line styles and markers for multiline plots

`'-'` solid line (default) | cell array of line styles

Line styles and markers for multiline plots, specified as a cell array. You can combine line and marker specifiers in a single entry.

Example: `{'-*',':','o'}`

MATLAB cycles through the line styles only after using all the colors contained in the ColorOrder property. The default `LineStyleOrder` has only one line style.

Specifier	Line Style
`'-'` (default)	Solid line
`'--'`	Dashed line
`':'`	Dotted line
`'-.'`	Dash-dotted line

Specifier	Line Style
'+'	Plus sign markers
'o'	Circle markers
'*'	Star markers
'.'	Point markers
'x'	Cross markers
's'	Square markers
'd'	Diamond markers
'^'	Upward-pointing triangle markers
'v'	Downward-pointing triangle markers
'>'	Right-pointing triangle markers
'<'	Left-pointing triangle markers
'p'	Five-pointed star (pentagram) markers
'h'	Six-pointed star (hexagram) markers

Some graphics functions reset this property to the default value before plotting. To specify the line styles, you can change the default value before plotting. For example, this code changes the default value for all future axes.

```
set(groot,'defaultAxesLineStyleOrder',{'-*',':','o'})
```

`LineStyleOrderIndex` — Next line style to use in line style order

1 (default) | positive integer

Next line style to use in the line style order, specified as a positive integer. For example, if this property is set to `1`, then the next plot added to the axes uses the first line style in the line style order. If the index value exceeds the number of line styles in the line style order, then the index value modulo the number of line styles determines the next line style used.

If you used a `hold on` command or if the `NextPlot` property of the axes is set to `'add'`, then the line style order index value increases every time a new plot is added. Subsequent plots cycle through the line style order. Reset the line style order by setting the `LineStyleOrderIndex` property to `1`.

Example: `ax.LineStyleOrderIndex = 1`

Color and Transparency Mapping

CLim — Color limits for colormap

[0 1] (default) | two-element vector of the form [cmin cmax]

Color limits for the colormap, specified as a two-element vector of the form [cmin cmax].

If the associated mode property is set to 'auto', then MATLAB chooses the color limits. If you assign a value to this property, then MATLAB sets the mode to 'manual' and does not automatically choose the color limits.

CLimMode — Selection mode for CLim

'auto' (default) | 'manual'

Selection mode for the CLim property, specified as one of these values:

- 'auto' — Set the CLim property to span the CData limits of the graphics objects displayed in the axes.
- 'manual' — Use the manually specified values. To specify the values, set the CLim property. The axes does not change the values when the limits of the axes children change.

ALim — Alpha limits for alphamap

[0 1] (default) | two-element vector of the form [amin amax]

Alpha limits for alphamap, specified as a two-element vector of the form [amin amax].

If the associated mode property is set to 'auto', then MATLAB chooses the alpha limits. If you set this property, then MATLAB sets the mode to 'manual' and does not automatically choose the alpha limits.

ALimMode — Selection mode for ALim

'auto' (default) | 'manual'

Selection mode for the ALim property, specified as one of these values:

- 'auto' — Set the alpha limits to span the AlphaData values of the graphics objects in the axes.
- 'manual' — Use manually specified alpha limits. To specify the alpha limits, set the ALim property.

Multiple Plots

`NextPlot` — Properties to reset when adding new plot

`'replace'` (default) | `'add'` | `'replacechildren'` | `'replaceall'`

Properties to reset when adding a new plot to the axes, specified as one of these values:

- `'add'` — Add new plots to the existing axes. Do not delete existing plots or reset axes properties before displaying the new plot.
- `'replacechildren'` — Delete existing plots before displaying the new plot. Reset the `ColorOrderIndex` and `LineStyleOrderIndex` properties to `1`, but do not reset other axes properties. The next plot added to the axes uses the first color and line style based on the `ColorOrder` and `LineStyle` order properties. This value is similar to using `cla` before every new plot.
- `'replace'` — Delete existing plots and reset all axes properties, except `Position` and `Units`, to their default values before displaying the new plot.
- `'replaceall'` — Delete existing plots and reset all axes properties, except `Position` and `Units`, to their default values before displaying the new plot. This value is similar to using `cla reset` before every new plot.

Note: For axes with only one *y*-axis, the `'replace'` and `'replaceall'` property values are equivalent. For axes with two *y*-axes, the `'replace'` value affects only the active side while the `'replaceall'` value affects both sides.

Figures also have a NextPlot property. Alternatively, you can use the `newplot` function to prepare figures and axes for subsequent graphics commands.

`SortMethod` — Order for rendering objects

`'depth'` (default) | `'childorder'`

Order for rendering objects, specified as one of these values:

- `'depth'` — Draw objects in back-to-front order based on the current view. Use this value to ensure that objects in front of other objects are drawn correctly.
- `'childorder'` — Draw objects in the order in which they are created by graphics functions, without considering the relationship of the objects in three dimensions. This value can result in faster rendering, particularly if the figure is very large, but can also result in improper depth sorting of the objects displayed

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of objects to polar axes boundary

`'on'` (default) | `'off'`

Clipping of objects to the polar axes boundary, specified as either `'on'` or `'off'`. The clipping behavior of an object in the polar axes depends on both the `Clipping` property of the polar axes and the `Clipping` property of the individual object. The property value of the polar axes has these effects:

- `'on'` — Allow each individual object in the polar axes to control its own clipping behavior based on the `Clipping` property value for the object.
- `'off'` — Disable clipping for all objects in the polar axes, regardless of the `Clipping` property value for the individual objects. Parts of objects can appear outside of the polar axes limits. For example, parts can appear outside the limits if you create a plot, set `hold on`, freeze the axis scaling, and then add a plot that is larger than the original plot.

This table lists the results for different combinations of `Clipping` property values.

Clipping Property for Axes Object	Clipping Property for Individual Object	Result
`'on'`	`'on'`	Individual object is clipped. Others might or might not be.
`'on'`	`'off'`	Individual object is not clipped. Others might or might not be.
`'off'`	`'on'`	Individual object and other objects are not clipped.

Clipping Property for Axes Object	Clipping Property for Individual Object	Result
`'off'`	`'off'`	Individual object and other objects are not clipped.

Thick lines and markers might display outside the polar axes limits, even if clipping is enabled. If a plot contains markers, then as long as the data point lies within the polar axes, MATLAB draws the entire marker.

Location and Size

`OuterPosition` — Size and position of polar axes, including labels and margins

`[0 0 1 1]` (default) | four-element vector

Size and position of polar axes, including the labels and margins, specified as a four-element vector of the form `[left bottom width height]`. This vector defines the extents of the rectangle that encloses the outer bounds of the polar axes. The `left` and `bottom` elements define the distance from the lower-left corner of the figure or uipanel that contains the polar axes to the lower-left corner of the rectangle. The `width` and `height` elements are the rectangle dimensions.

By default, the values are measured in units normalized to the container. To change the units, set the `Units` property. The default value of `[0 0 1 1]` includes the whole interior of the container.

`Position` — Size and position of polar axes, not including labels or margins

`[0.1300 0.1100 0.7750 0.8150]` (default) | four-element vector

Size and position of the polar axes, not including labels or margins, specified as a four-element vector of the form `[left bottom width height]`. This vector defines the extents of the tightest bounding rectangle that encloses the polar axes. The `left` and `bottom` elements define the distance from the lower-left corner of the container to the lower-left corner of the rectangle. The `width` and `height` elements are the rectangle dimensions.

By default, the values are measured in units normalized to the container. To change the units, set the `Units` property.

Example: `ax.Position = [0 0 1 1]`

`TightInset` — Margins for text labels

four-element vector of the form `[left bottom right top]`

This property is read-only.

Margins for the text labels, returned as a four-element vector of the form `[left bottom right top]`. The elements define the distances between the bounds of the `Position` property and the extent of the polar axes text labels and title. By default, the values are measured in units normalized to the figure or uipanel that contains the polar axes. To change the units, set the `Units` property.

The `Position` property and the `TightInset` property define the tightest bounding box that encloses the polar axes and its labels and title.

`ActivePositionProperty` — Position property to hold constant during resize operation
`'outerposition'` (default) | `'position'`

Position property to hold constant during resize operation, specified as one of these values:

- `'outerposition'` — Hold the `OuterPosition` property constant. Resizing the figure does not clip any of the text.
- `'position'` — Hold the `Position` property constant.

A figure can change size if you interactively change resize it or during a printing or exporting operation.

`Units` — Position units
`'normalized'` (default) | `'inches'` | `'centimeters'` | `'points'` | `'pixels'` | `'characters'`

Position units, specified as one of the values in this table.

Units	Description
`'normalized'` (default)	Normalized with respect to the container, which is typically the figure or a uipanel. The lower left corner of the container maps to `(0,0)` and the upper right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default uicontrol font of the graphics root object:

Units	Description
	• Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Typography points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

When specifying the units as a `Name,Value` pair during object creation, you must set the `Units` property before specifying the properties that you want to use these units, such as `Position`.

Identifiers

`Type` — Type of graphics object

`'polaraxes'` (default)

This property is read-only.

Type of graphics object, returned as `'polaraxes'`.

`Tag` — Tag to associate with polaraxes

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Parent/Child

`Parent` — Parent of polaraxes

figure object | uipanel object | uitab object

Parent of polaraxes, specified as figure object, uipanel object, or uitab object.

`Children` — Children

empty `GraphicsPlaceholder` array | array of graphics objects

Children, returned as an array of graphics objects. Use this property to view a list of the children or to reorder the children by setting the property to a permutation of itself.

You cannot add or remove children using the `Children` property. To add a child to this list, set the `Parent` property of the child graphics object to the `PolarAxes` object.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see “Callback Definition”.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the `PolarAxes` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'`. The `HitTest` property determines if the `PolarAxes` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `PolarAxes` object passes the click to the object below it in the current view of the figure window, which is typically the axes or the figure. The `HitTest` property has no effect.

If you want an object to be clickable when it is underneath other objects that you do not want to be clickable, then set the `PickableParts` property of the other objects to `'none'` so that the click passes through them.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `PolarAxes` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `PolarAxes` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `PolarAxes` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `PolarAxes` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `PolarAxes` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`cla` | `gca` | `polaraxes`

Topics

"Access Property Values"
"Graphics Object Properties"

polarhistogram

Histogram chart in polar coordinates

Syntax

```
polarhistogram(theta)
polarhistogram(theta,nbins)
polarhistogram(theta,edges)
polarhistogram('BinEdges',edges,'BinCounts',counts)
```

```
polarhistogram( ___ ,Name,Value)
polarhistogram(pax, ___ )
h = polarhistogram( ___ )
```

Description

`polarhistogram(theta)` creates a histogram plot in polar coordinates by sorting the values in `theta` into equally spaced bins. Specify the values in radians.

`polarhistogram(theta,nbins)` uses the number of bins specified by the positive integer, `nbins`.

`polarhistogram(theta,edges)` sorts `theta` into bins with bin edges specified by the vector, `edges`. All bins include the left edge, but only the last bin includes the right edge. In other words, the last bin includes both edges.

`polarhistogram('BinEdges',edges,'BinCounts',counts)` uses the manually specified bin edges and associated bin counts. The `polarhistogram` function does not do any data binning.

`polarhistogram( ___ ,Name,Value)` specifies additional options using one or more name-value pair arguments. For example, you can use semitransparent bars by specifying `'FaceAlpha'` and a scalar value between 0 and 1.

`polarhistogram(pax, ___ )` plots into the polar axes specified by `pax` instead of into the current axes.

`h = polarhistogram( ___ )` returns the `Histogram` object. Use `h` to modify the histogram after it is created. For a list of properties, see Histogram Properties.

Examples

Create Histogram Chart in Polar Coordinates

Create a vector of values between 0 and 2π. Create a histogram chart that shows the data sorted into six bins.

```
theta = [0.1 1.1 5.4 3.4 2.3 4.5 3.2 3.4 5.6 2.3 2.1 3.5 0.6 6.1];
polarhistogram(theta,6)
```

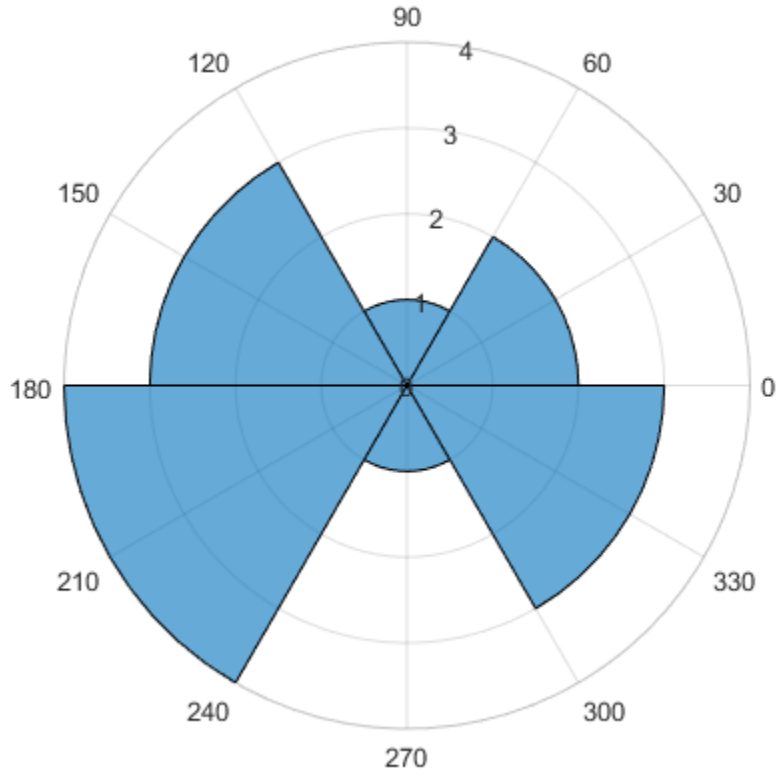

Specify Number of Bins for Polar Histogram Chart

Create a histogram plot from 100,000 values between $-\pi$ and π, and sort the data into 25 bins.

```
theta = atan2(rand(100000,1)-0.5,2*(rand(100000,1)-0.5));
polarhistogram(theta,25);
```

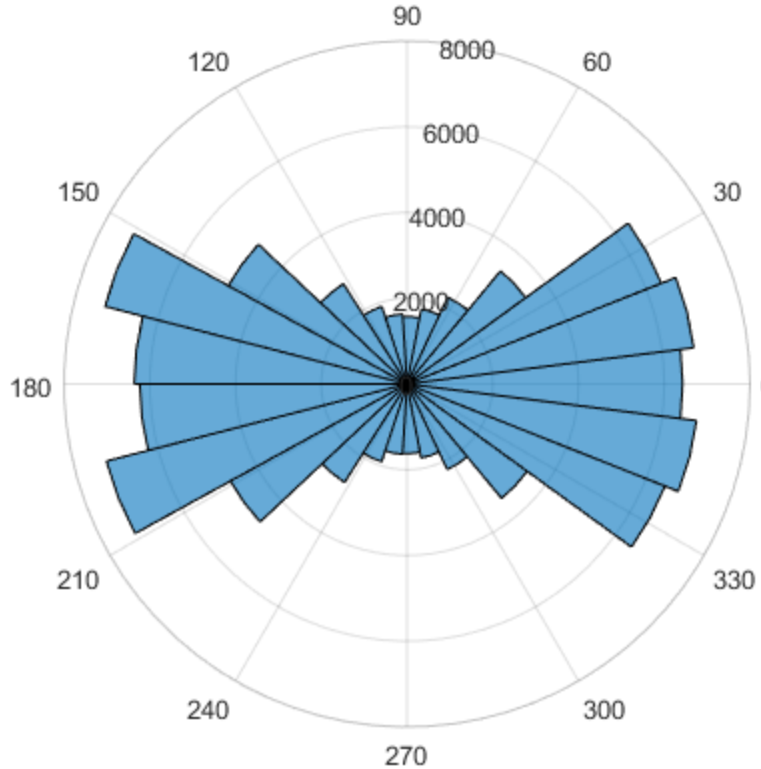

Modify Appearance of Histogram Chart

Create a histogram chart in polar coordinates, and then change its appearance. Specify the bar colors by setting the `FaceColor` property to a character vector of a color name, such as `'red'`, or an RGB triplet. Specify the transparency by setting the `FaceAlpha` property to a value between 0 and 1.

```
theta = atan2(rand(100000,1)-0.5,2*(rand(100000,1)-0.5));
polarhistogram(theta,25,'FaceColor','red','FaceAlpha',.3);
```

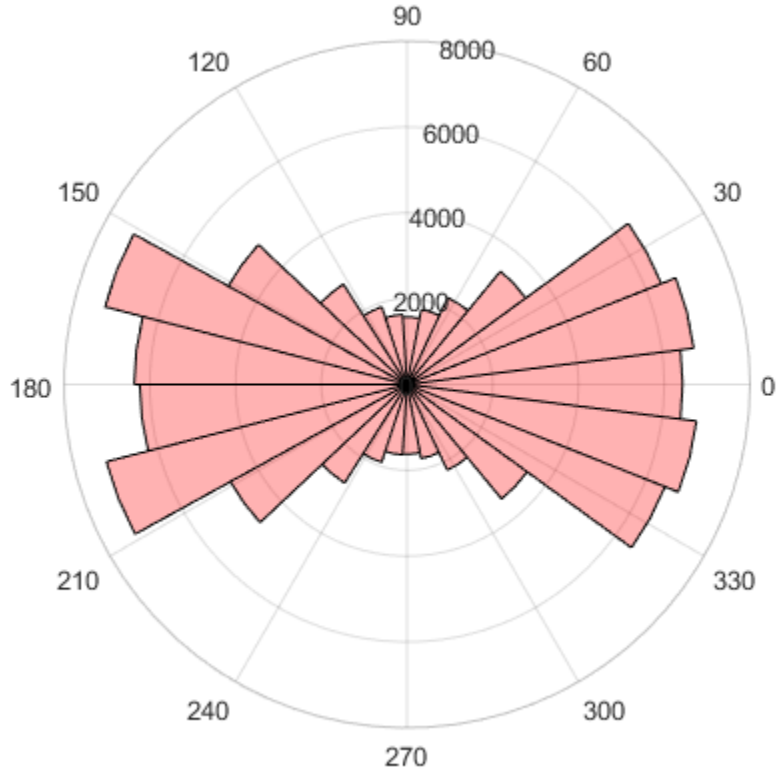

Modify Appearance of Histogram Chart After Creation

Create a histogram chart in polar coordinates. Assign the histogram object to the variable h.

```
theta = atan2(rand(100000,1)-0.5,2*(rand(100000,1)-0.5));
h = polarhistogram(theta,25)
```

```
h =

  Histogram with properties:

             Data: [100000×1 double]
```

```
          Values: [1×25 double]
         NumBins: 25
        BinEdges: [1×26 double]
        BinWidth: 0.2513
       BinLimits: [-3.1416 3.1416]
  Normalization: 'count'
       FaceColor: 'auto'
       EdgeColor: [0 0 0]

Use GET to show all properties
```

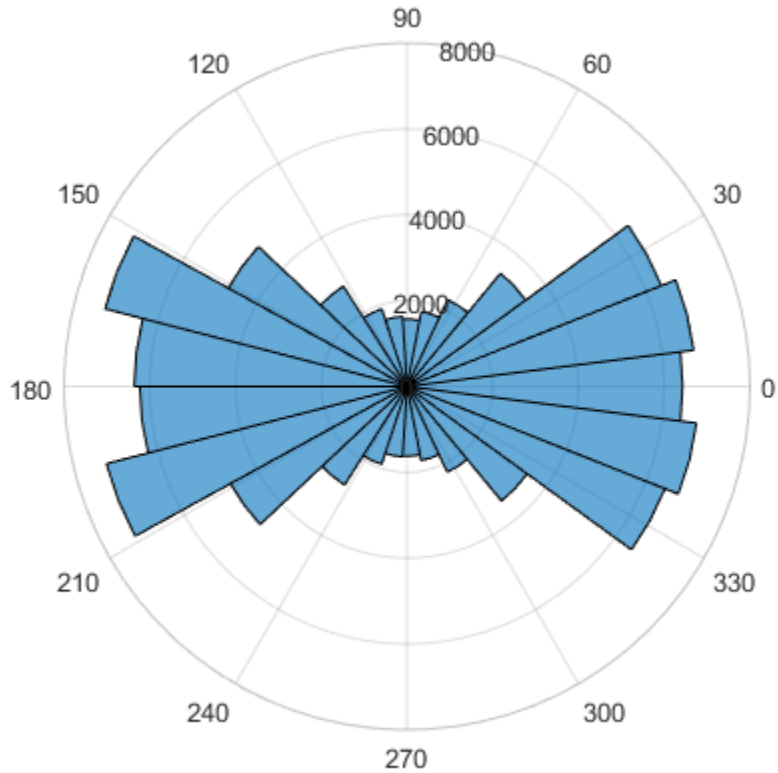

Use `h` to access and modify properties of the histogram object after it is created. For example, show just the histogram outline by setting the `DisplayStyle` property of the histogram object.

```
h.DisplayStyle = 'stairs';
```

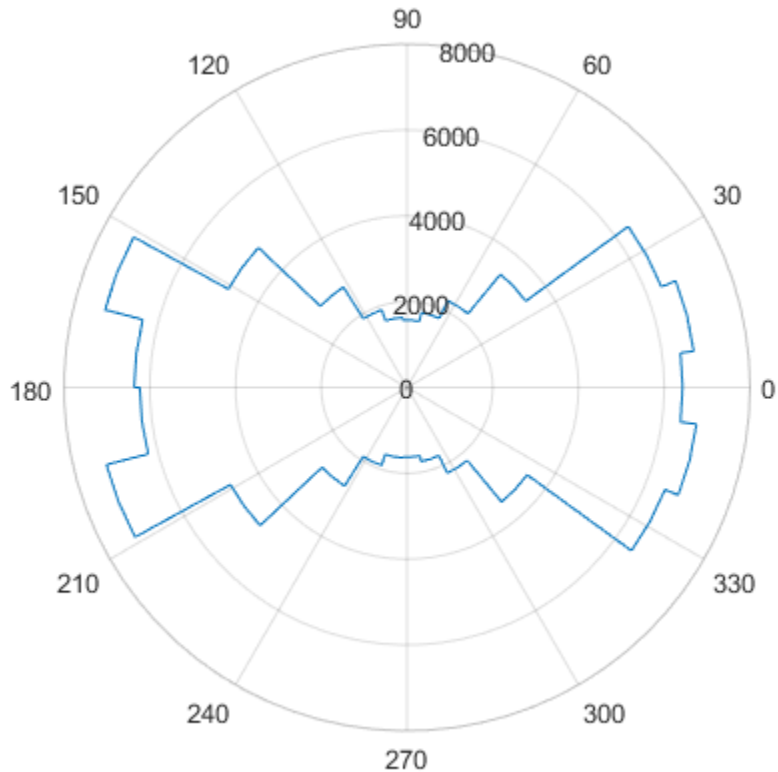

Input Arguments

`theta` — Data to distribute among bins
vector | matrix

Data to distribute among bins, specified as a vector or a matrix. `polarhistogram` creates one histogram, regardless of whether you specify a vector or a matrix. Specify the values in radians. To convert degrees to radians, use `deg2rad`.

Values that correspond to the same angle direction differ by exactly 2π, and are sorted into the same bin. `polarhistogram` does not include `NaN`, `Inf`, and `-Inf` values in any bin.

Example: `theta = [0 0.4 0.5 0.7 2.3 3.0 1.7 0.3];`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nbins` — Number of bins
positive integer

Number of bins, specified as a positive integer. If you do not specify `nbins`, then `polarhistogram` automatically calculates how many bins to use based on the values in `theta`.

Example: `nbins = 15;`

`edges` — Bin edges
vector

Bin edges, specified as a vector. The difference between the minimum and maximum edge values must be less than or equal to 2π.

Example: `polarhistogram('BinEdges',[0 pi/3 pi 3*pi/2 2*pi],'BinCounts',[5 3 4 6])`

`counts` — Bin counts
vector

Bin counts, specified as a vector. Use this option if you perform the bin counts calculation separately and you do not want `polarhistogram` to do any data binning.

Example: `polarhistogram('BinEdges',[0 pi/3 pi 3*pi/2 2*pi],'BinCounts',[5 3 4 6])`

`pax` — `PolarAxes` object
`PolarAxes` object

`PolarAxes` object. If you do not specify the polar axes, then `polarhistogram` uses the current axes. `polarhistogram` does not support plotting into Cartesian axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The histogram properties listed here are only a subset. For a complete list, see Histogram Properties.

Example: `polarhistogram(theta,'FaceAlpha',0.3)` creates a histogram chart with semitransparent bars.

`'BinLimits'` — Bin limits

two-element vector

Bin limits, specified as a two-element vector of the form `[bmin,bmax]`, where `bmin` is less than `bmax`.

This option plots a histogram using the input array values that fall between `bmin` and `bmax` inclusive. That is, `theta(theta>=bmin & theta<=bmax)`.

Example: `polarhistogram(theta,'BinLimits',[-pi/2 pi/2])` plots a histogram using only the values in `theta` that are between `-pi/2` and `pi/2` inclusive.

`'BinWidth'` — Width across top of bins

scalar less than 2π

Width across the top of the bins, specified as a scalar less than 2π.

`polarhistogram` uses a maximum of 65,536 bins (or 2^{16}). If the specified bin width requires more bins, then `polarhistogram` uses the maximum number of bins and adjust the bin width accordingly.

Example: `polarhistogram(theta,'BinWidth',pi)` uses bins with a width of π.

`'Normalization'` — Type of normalization

`'count'` (default) | `'probability'` | `'countdensity'` | `'pdf'` | `'cumcount'` | `'cdf'`

Type of normalization, specified as one of the values in this table.

Value	Description
`'count'`	Default normalization scheme. The height of each bar is the number of observations in each bin. The sum of the bar heights is `numel(theta)`.
`'probability'`	The height of each bar is the relative number of observations, (number of observations in bin/total number of observations). The sum of the bar heights is `1`.
`'countdensity'`	The height of each bar is the number of observations in bin/width of bin.
`'pdf'`	Probability density function estimate. The height of each bar is, (number of observations in the bin)/(total number of observations * width of bin). The area of each bar is the relative number of observations. The sum of the bar areas is `1`.
`'cumcount'`	The height of each bar is the cumulative number of observations in each bin and all previous bins. The height of the last bar is `numel(theta)`.
`'cdf'`	Cumulative density function estimate. The height of each bar is equal to the cumulative relative number of observations in the bin and all previous bins. The height of the last bar is `1`.

Example: `polarhistogram(theta,'Normalization','pdf')` plots an estimate of the probability density function for `theta`.

`'DisplayStyle'` — Histogram display style

`'bar'` (default) | `'stairs'`

Histogram display style, specified as one of these values:

- `'stairs'` — Display the histogram outline only.
- `'bar'` — Show each individual bar with a filled interior.

Example: `polarhistogram(theta,'DisplayStyle','stairs')` plots the outline of the histogram.

`'FaceAlpha'` — Transparency of histogram bars

`0.6` (default) | scalar value between `0` and `1` inclusive

Transparency of histogram bars, specified as a scalar value between `0` and `1` inclusive. `polarhistogram` uses the same transparency for all the bars of the histogram. A value of `1` means fully opaque and `0` means completely transparent (invisible).

Example: `polarhistogram(theta,'FaceAlpha',.5)` creates a histogram plot with semi-transparent bars.

`'FaceColor'` — Histogram bar color

`'auto'` (default) | `'none'` | RGB triplet or color name

Histogram bar color, specified as one of these values:

- `'none'` — Do not fill the bars.
- `'auto'` — Automatically choose the histogram bar color.
- RGB triplet or a color name — Fill the bars with the specified color.

  An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

If you specify `DisplayStyle` as `'stairs'`, then `polarhistogram` does not use the `FaceColor` property.

Example: `polarhistogram(theta,'FaceColor','g')` creates a histogram plot with green bars.

Limitations

- `polarhistogram` does not support creating histograms of categorical data in polar axes.

See Also

See Also

Functions
`histogram` | `polarplot` | `polarscatter`

Properties
Histogram Properties | PolarAxes Properties

Introduced in R2016b

polarplot

Plot line in polar coordinates

Syntax

```
polarplot(theta,rho)
polarplot(theta,rho,LineSpec)
polarplot(theta1,rho1,...,thetaN,rhoN)
polarplot(theta1,rho1,LineSpec1,...,thetaN,rhoN,LineSpec1)

polarplot(rho)
polarplot(rho,LineSpec)

polarplot(Z)
polarplot(Z,LineSpec)

polarplot( ___ ,Name,Value)
polarplot(pax, ___ )
p = polarplot( ___ )
```

Description

`polarplot(theta,rho)` plots a line in polar coordinates, with `theta` indicating the angle in radians and `rho` indicating the radius value for each point. The inputs must be vectors with equal length or matrices with equal size. If the inputs are matrices, then `polarplot` plots columns of `rho` versus columns of `theta`. Alternatively, one of the inputs can be a vector and the other a matrix as long as the vector is the same length as one dimension of the matrix.

`polarplot(theta,rho,LineSpec)` sets the line style, marker symbol, and color for the line.

`polarplot(theta1,rho1,...,thetaN,rhoN)` plots multiple `rho,theta` pairs.

`polarplot(theta1,rho1,LineSpec1,...,thetaN,rhoN,LineSpec1)` specifies the line style, marker symbol, and color for each line.

`polarplot(rho)` plots the radius values in `rho` at evenly spaced angles between 0 and 2π.

`polarplot(rho,LineSpec)` sets the line style, marker symbol, and color for the line.

`polarplot(Z)` plots the complex values in `Z`.

`polarplot(Z,LineSpec)` sets the line style, marker symbol, and color for the line.

`polarplot( ___ ,Name,Value)` specifies properties of the chart line using one or more `Name,Value` pair arguments. The property settings apply to all the lines. You cannot specify different property values for different lines using `Name,Value` pairs.

`polarplot(pax, ___ )` uses the `PolarAxes` object specified by `pax`, instead of the current axes.

`p = polarplot( ___ )` returns one or more chart line objects. Use `p` to set properties of a specific chart line object after it is created. For a list of properties, see Chart Line Properties.

Examples

Create Polar Plot

Plot a line in polar coordinates.

```
theta = 0:0.01:2*pi;
rho = sin(2*theta).*cos(2*theta);
polarplot(theta,rho)
```

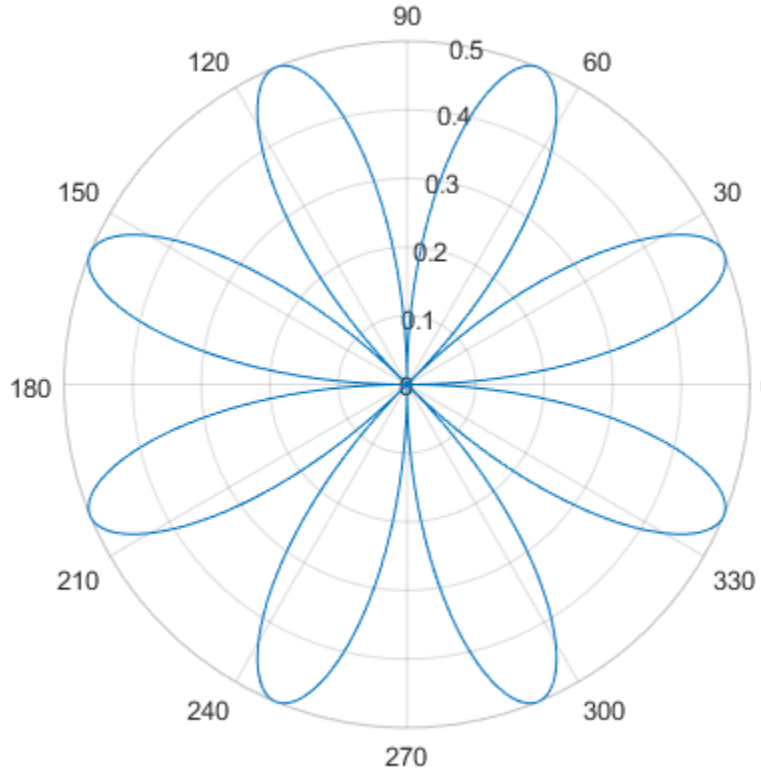

Convert from Degrees to Radians Before Plotting

Create the data to plot.

```
theta = linspace(0,360,50);
rho = 0.005*theta/10;
```

Convert the values in `theta` from degrees to radians. Then, plot the data in polar coordinates.

```
theta_radians = deg2rad(theta);
polarplot(theta_radians,rho)
```

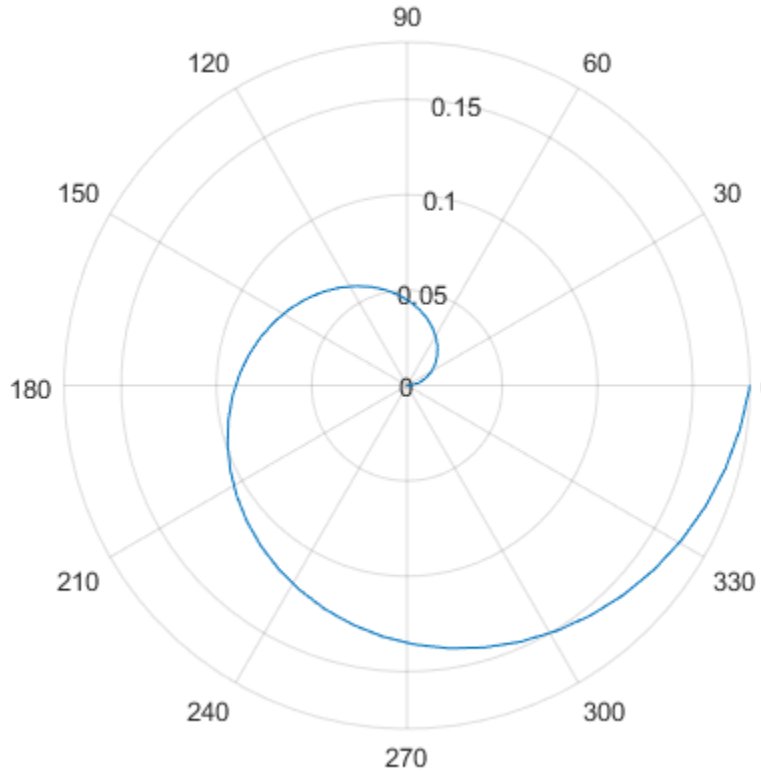

Plot Multiple Lines in Polar Coordinates

Plot two lines in polar coordinates. Use a dashed line for the second line.

```
theta = linspace(0,6*pi);
rho1 = theta/10;
polarplot(theta,rho1)

rho2 = theta/12;
hold on
polarplot(theta,rho2,'--')
hold off
```

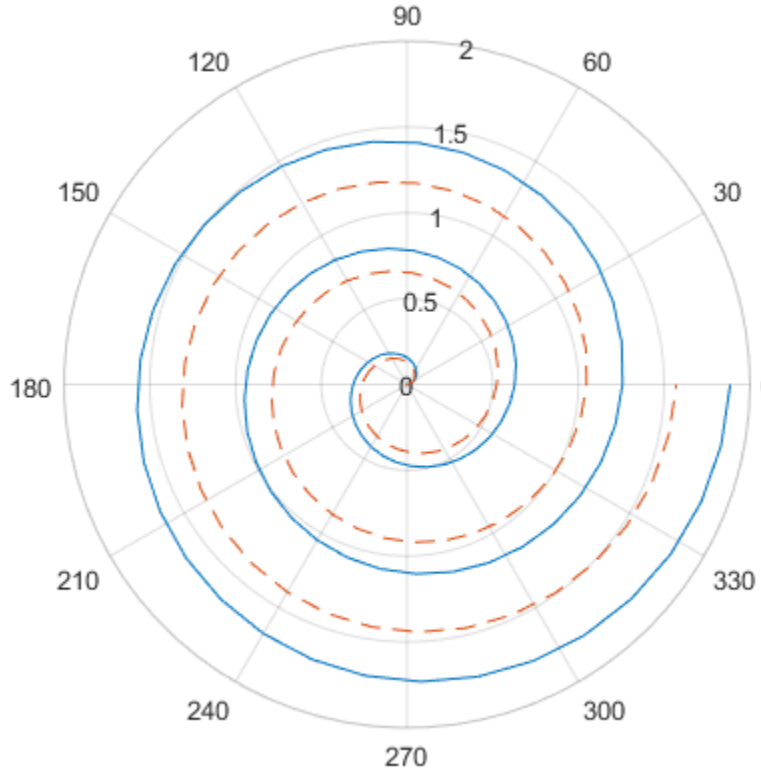

Plot Radius Values at Equally Spaced Angles

Specify only the radius values, without specifying the angle values. `polarplot` plots the radius values at equally spaced angles that span from 0 to 2π. Display a circle marker at each data point.

```
rho = 10:5:70;
polarplot(rho,'-o')
```

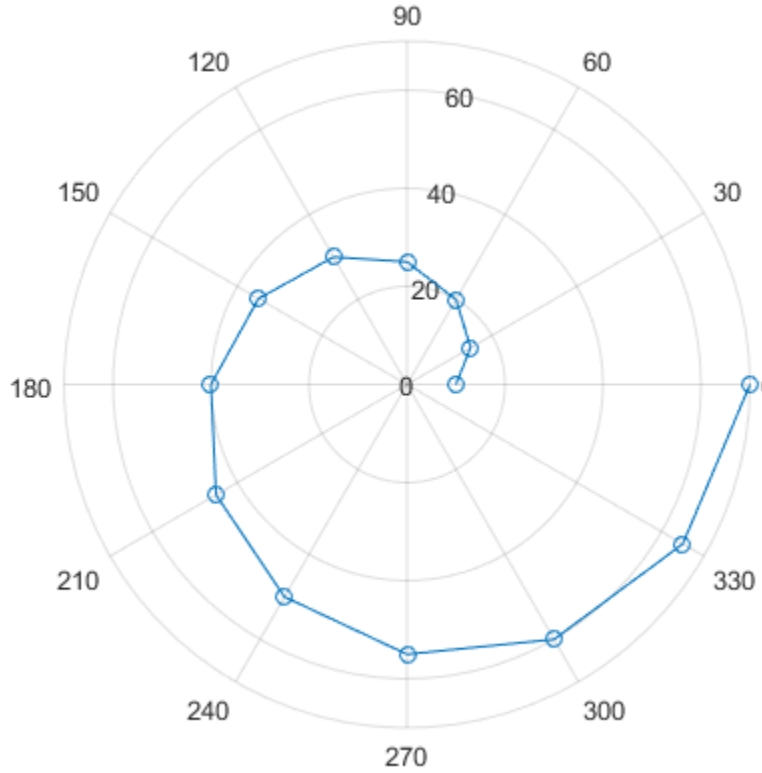

Plot Negative Radius Values

Create a polar plot using negative radius values. By default, `polarplot` reflects negative values through the origin.

```
theta = linspace(0,2*pi);
rho = sin(theta);
polarplot(theta,rho)
```

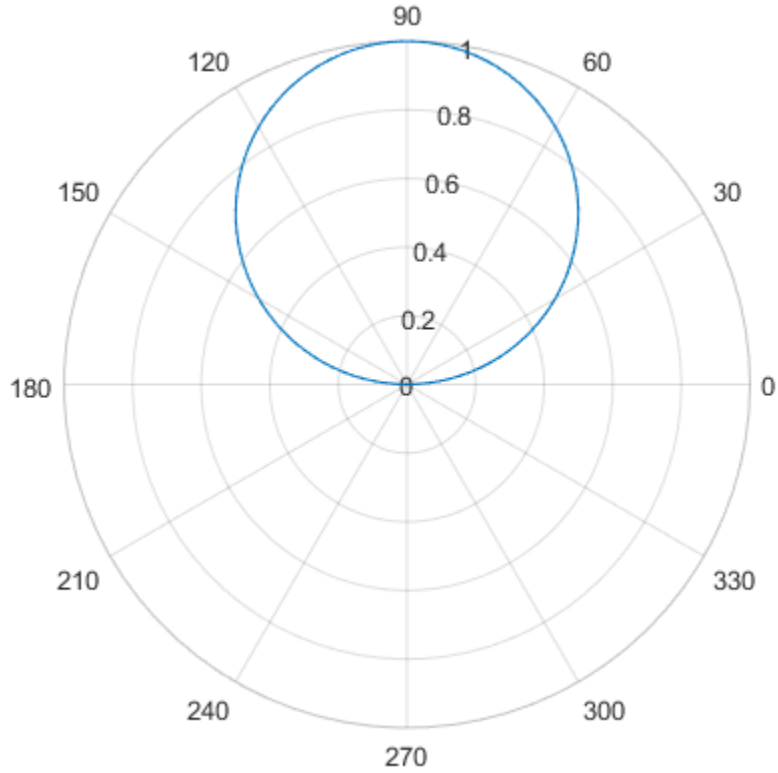

Change the limits of the *r*-axis so it ranges from -1 to 1.

```
rlim([-1 1])
```

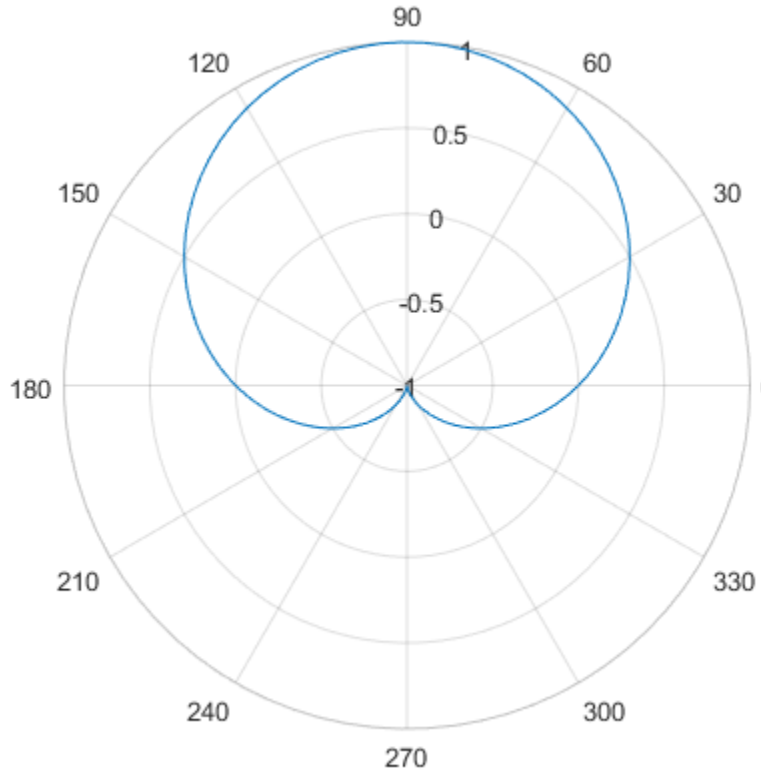

Specify Line Color for Polar Plot

Create a polar plot using a red line with circle markers.

```
theta = linspace(0,2*pi,25);
rho = 2*theta;
polarplot(theta,rho,'r-o')
```

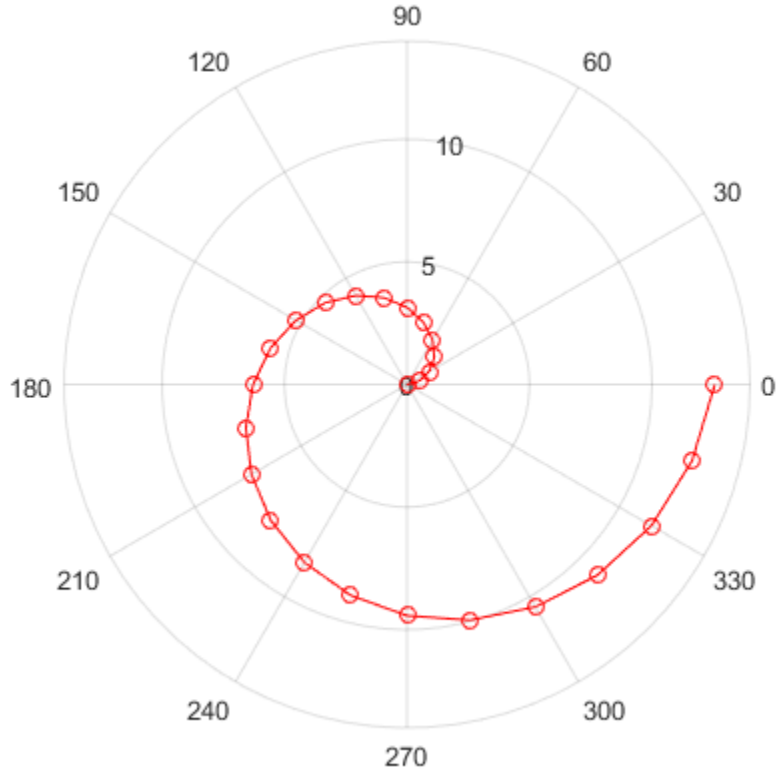

Specify Line Color After Creation

Create a polar plot and return the chart line object.

```
theta = linspace(0,2*pi,25);
rho = 2*theta;
p = polarplot(theta,rho);
```

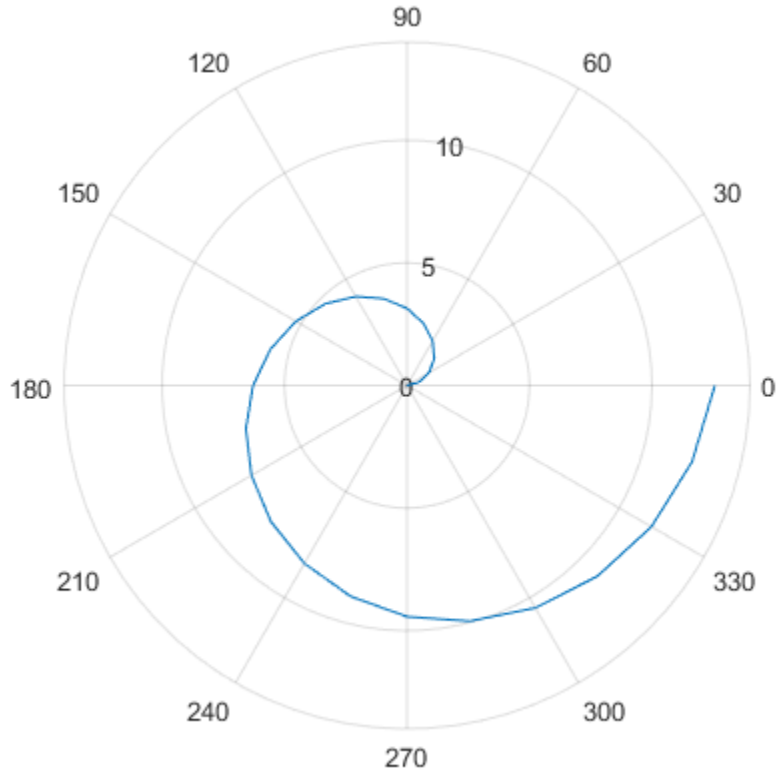

Change the line color and width and add markers.

```
p.Color = 'magenta';
p.Marker = 'square';
p.MarkerSize = 8;
```

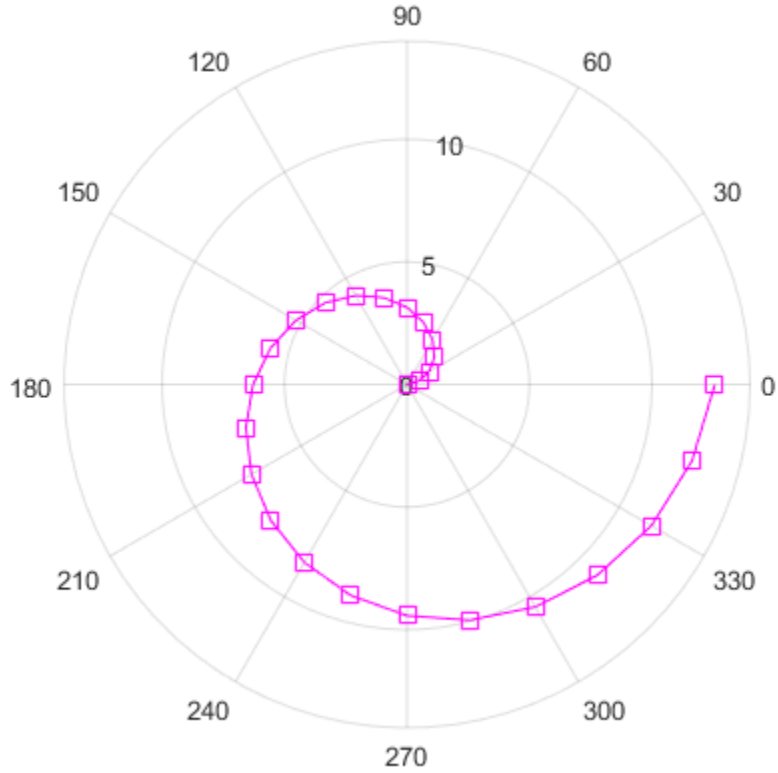

Create Polar Plot with Complex Values

Plot complex values in polar coordinates. Display markers at each point without a line connecting them.

```
Z = [2+3i 2 -1+4i 3-4i 5+2i -4-2i -2+3i -2 -3i 3i-2i];
polarplot(Z,'*')
```

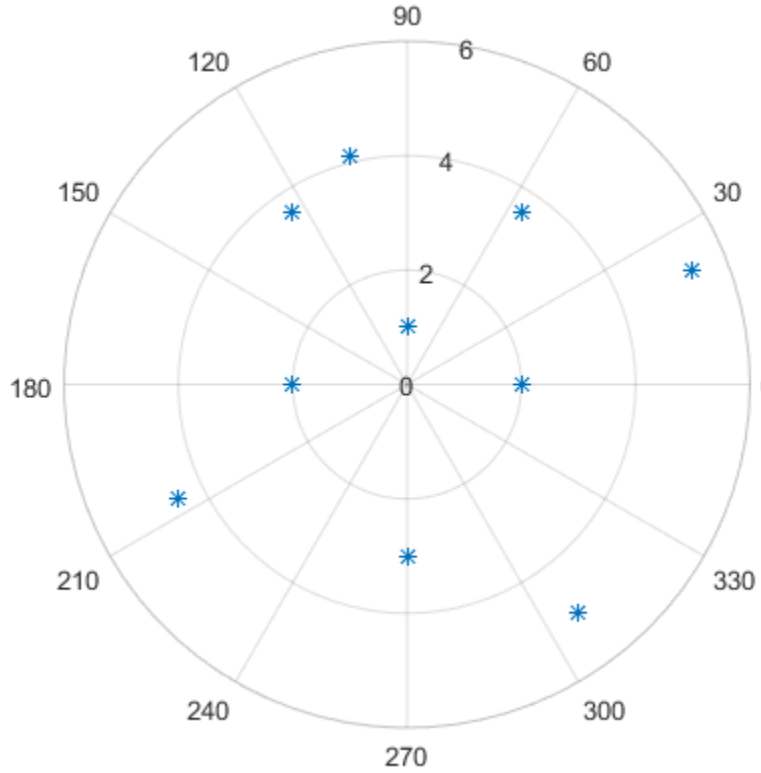

Input Arguments

`theta` — Angle values

vector | matrix

Angle values, specified as a vector or matrix. Specify the values in radians. To convert data from degrees to radians, use `deg2rad`.

To change the limits of the theta-axis, use `thetalim`.

Example: `[0 pi/2 pi 3*pi/2 2*pi]`

`rho` — Radius values

vector | matrix

Radius values, specified as a vector or matrix. By default, negative values are reflected through 0. A point is reflected by taking the absolute value of its radius, and adding 180 degrees to its angle.

To change the limits of the *r*-axis, use `rlim`.

Example: `[1 2 3 4 5]`

`Z` — Complex values

vector | matrix

Complex values, specified as a vector or matrix where each element is of the form `rho*`$e^{\text{i*theta}}$, or `x+iy`, where:

- `rho = sqrt(x^2+y^2)`
- `theta = atan(y/x)`

Example: `[1+2i 3+4i 3i]`

`LineSpec` — Line specification

character vector containing line style, marker, and color specifier

Line specification, specified as a character vector containing a line style, marker, and color specifier. The elements of the character vector can appear in any order, and you can omit one or more options. If you omit the line style and specify the marker, then the plot shows only markers with no line connecting them.

Example: `'--or'` is a red dashed line with circle markers

Specifier	Line Style
`-`	Solid line (default)
`--`	Dashed line
`:`	Dotted line
`-.`	Dash-dot line

Specifier	Marker
`o`	Circle
`+`	Plus sign

Specifier	Marker
*	Asterisk
.	Point
x	Cross
s	Square
d	Diamond
^	Upward-pointing triangle
v	Downward-pointing triangle
>	Right-pointing triangle
<	Left-pointing triangle
p	Pentagram
h	Hexagram

Specifier	Color
y	yellow
m	magenta
c	cyan
r	red
g	green
b	blue
w	white
k	black

`pax` — `PolarAxes` object
`PolarAxes` object

`PolarAxes` object. You can modify the appearance and behavior of a `PolarAxes` object by setting its properties. For a list of properties, see PolarAxes Properties.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`Name,Value` pair settings apply to all the lines plotted. You cannot specify different `Name,Value` pairs for each line using this syntax. Instead, return the chart line objects and use dot notation to set the properties for each line.

The properties listed here are only a subset. For a full list, see Chart Line Properties.

Example: `'LineWidth',3`

`'Color'` — Line color
`[0 0.4470 0.7410]` (default) | character vector | RGB triplet | `'none'`

Line color, specified as a character vector of a color name, an RGB triplet, or `'none'`.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

If you specify the `Color` as `'none'`, then the line is invisible.

`'LineStyle'` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`'Marker'` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'x'` | `...`

Marker symbol, specified as one of the markers in this table. By default, a chart line does not have markers. Add markers at each data point along the line by specifying a marker symbol.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle

Value	Description
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`'MarkerSize'` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`'MarkerFaceColor'` — Marker fill color

`'none'` (default) | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which makes the interior invisible.
- `'auto'` — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Tips

- To convert data from degrees to radians, use `deg2rad`. To convert data from radians to degrees, use `rad2deg`.
- You can modify polar axes properties to customize the chart. For a list of properties, see Polar Axes Properties.
- To plot additional data in the polar axes, use the `hold on` command. However, you cannot plot data that requires Cartesian axes in a polar chart.

See Also

See Also

Functions
`deg2rad` | `rad2deg` | `rlim`

Properties
Chart Line Properties | PolarAxes Properties

Introduced in R2016a

polarscatter

Scatter chart in polar coordinates

Syntax

```
polarscatter(th,r)
polarscatter(th,r,sz)
polarscatter(th,r,sz,c)

polarscatter( ___ ,mkr)
polarscatter( ___ ,'filled')
polarscatter( ___ ,Name,Value)
polarscatter(pax, ___ )
ps = polarscatter( ___ )
```

Description

`polarscatter(th,r)` plots `th` versus `r` and displays a circle at each data point. `th` and `r` must be vectors of the same length. You must specify `th` in radians.

`polarscatter(th,r,sz)` sets the marker sizes, where `sz` specifies the area of each marker in points squared. To draw all the markers with the same size, specify `sz` as a scalar. To draw the markers with different sizes, specify `sz` as a vector the same length as `th`.

`polarscatter(th,r,sz,c)` sets the marker colors, where `c` is either a vector, a three-column matrix, or a character vector of a color name, such as `'red'`.

`polarscatter( ___ ,mkr)` sets the marker symbol. For example, `'+'` displays cross markers. Specify the marker symbol after any of the input argument combinations in the previous syntaxes.

`polarscatter( ___ ,'filled')` fills the marker interiors.

`polarscatter( ___ ,Name,Value)` modifies the appearance of the scatter plot using one or more name-value pair arguments. For example, you can use semi-transparent markers by specifying `'FaceAlpha'` and a scalar value between `0` and `1`.

`polarscatter(pax, ___ )` plots into the polar axes specified by `pax` instead of into the current axes.

`ps = polarscatter( ___ )` returns the `Scatter` object. Use `ps` to modify the appearance of the `Scatter` object after it is created. For a list of properties, see Scatter Properties.

Examples

Create Scatter Chart

Create a scatter chart in polar coordinates.

```
th = pi/4:pi/4:2*pi;
r = [19 6 12 18 16 11 15 15];
polarscatter(th,r)
```

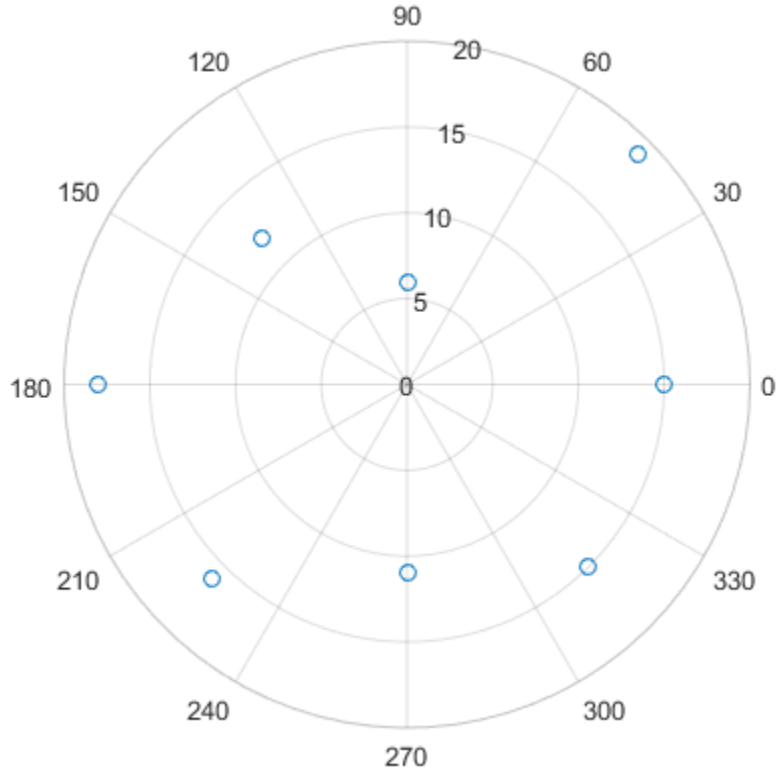

Use Filled Markers and Set Marker Size

Create a scatter chart that uses filled markers by specifying the optional input argument, `'filled'`. Set the marker size to 75 points squared.

```
th = linspace(0,2*pi,20);
r = rand(1,20);
sz = 75;
polarscatter(th,r,sz,'filled')
```

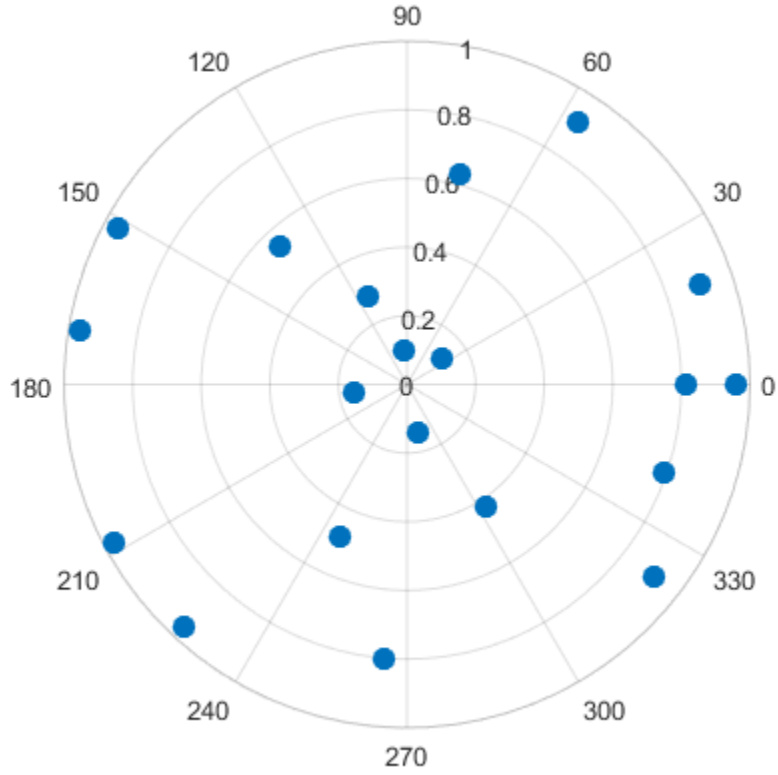

Use Markers with Varying Sizes and Colors

Create a scatter chart with markers of varying sizes and colors. Specify the optional size and color input arguments as vectors. Use unique values in the color vector to specify the different colors you want. The values map to colors in the colormap.

```
th = pi/4:pi/4:2*pi;
r = [19 6 12 18 16 11 15 15];
sz = 100*[6 15 20 3 15 3 6 40];
c = [1 2 2 2 1 1 2 1];
polarscatter(th,r,sz,c,'filled','MarkerFaceAlpha',.5)
```

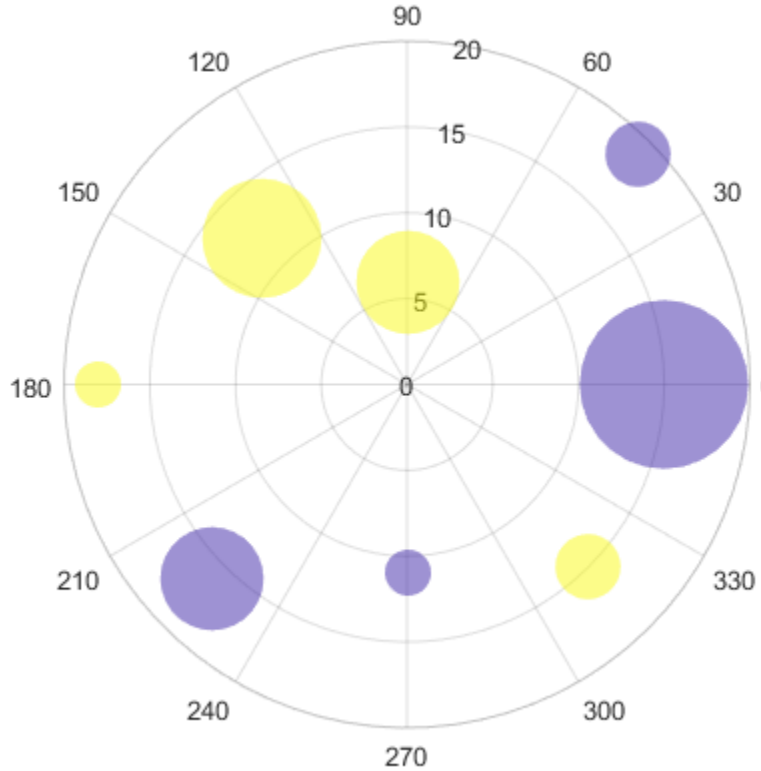

Convert from Degrees to Radians Before Plotting

Create data where the angle values are in degrees. Since `polarscatter` requires angle values in radians, convert the values to radians before plotting using `deg2rad`.

```
th = linspace(0,360,50);
r = 0.005*th/10;
th_radians = deg2rad(th);
polarscatter(th_radians,r)
```

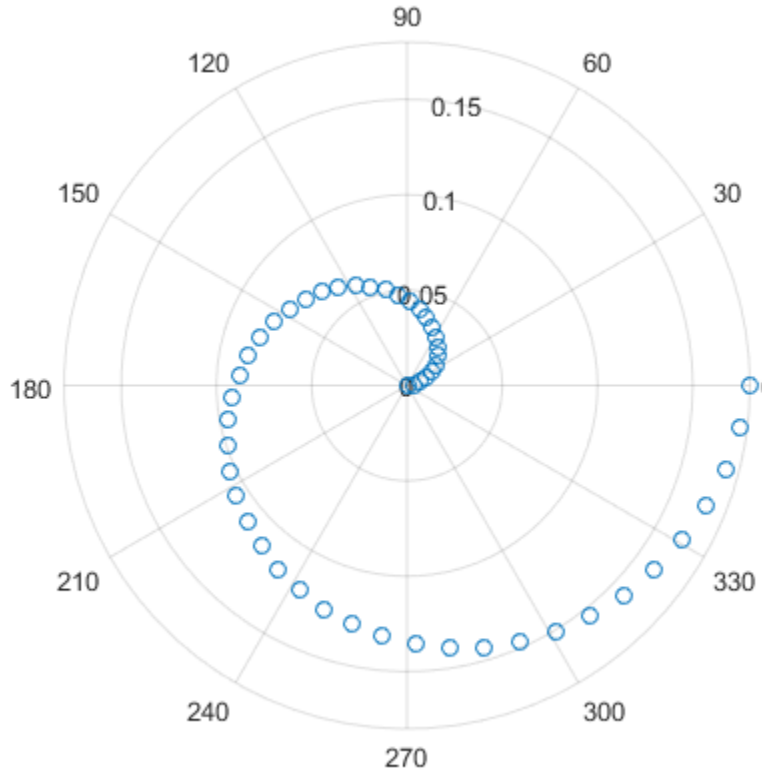

Combine Two Scatter Charts

Combine two scatter charts in the same polar axes using the `hold` command. Add a legend with a description of each chart.

```
th = pi/6:pi/6:2*pi;
r1 = rand(12,1);
polarscatter(th,r1,'filled')

hold on
r2 = rand(12,1);
polarscatter(th,r2,'filled')
hold off
```

```
legend('Series A','Series B')
```

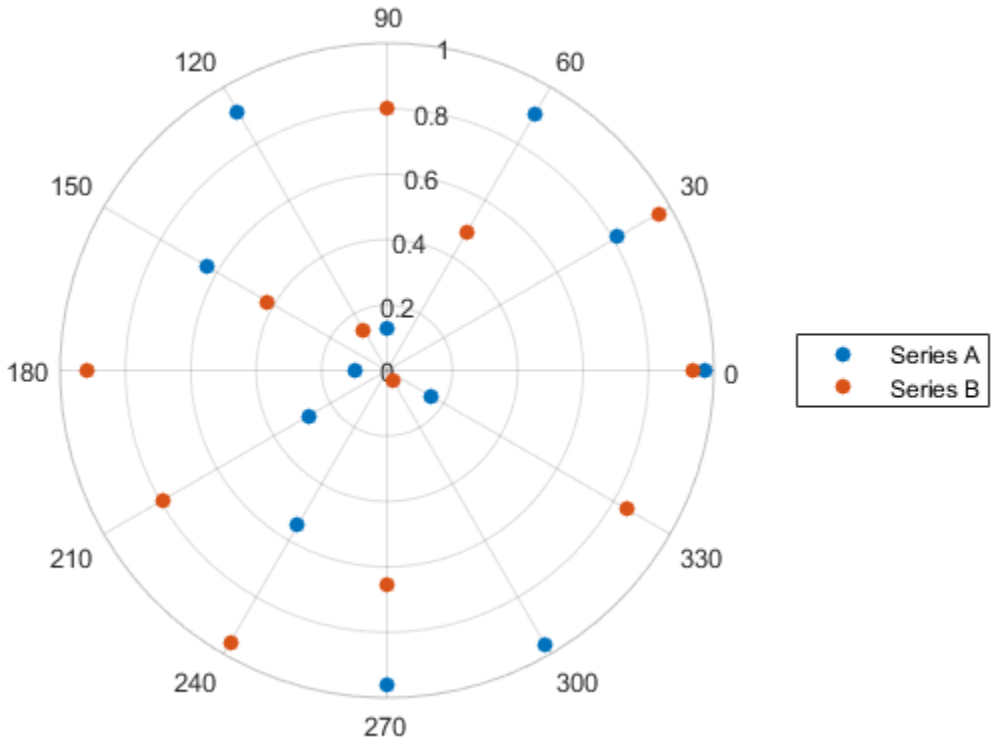

Modify Scatter Chart After Creation

Create a scatter chart and assign the scatter object to the variable `ps`.

```
th = pi/6:pi/6:2*pi;
r = rand(12,1);
ps = polarscatter(th,r,'filled')
```

```
ps =

  Scatter with properties:
```

```
          Marker: 'o'
  MarkerEdgeColor: 'none'
  MarkerFaceColor: 'flat'
        SizeData: 36
       LineWidth: 0.5000
       ThetaData: [1×12 double]
           RData: [1×12 double]
           ZData: [1×0 double]
           CData: [0 0.4470 0.7410]

Use GET to show all properties
```

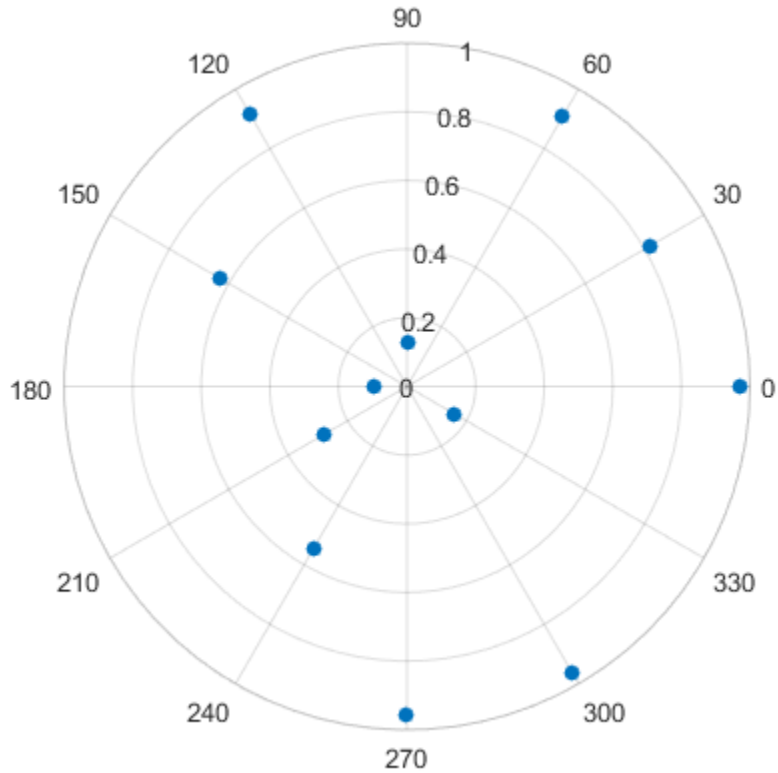

Use `ps` to modify properties of the scatter object after it is created.

```
ps.Marker = 'square';
ps.SizeData = 200;
ps.MarkerFaceColor = 'red';
ps.MarkerFaceAlpha = .5;
```

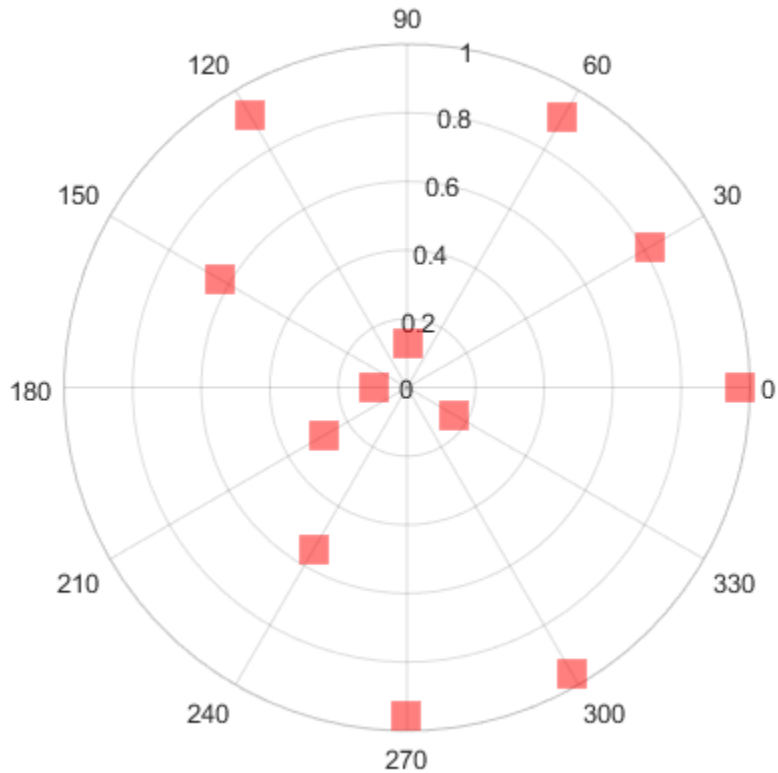

Input Arguments

th — *theta* values

vector | scalar

theta values, specified as a vector or a scalar in radians. `th` and `r` must be the same size. To convert degrees to radians, use `deg2rad`.

The ThetaData property of the scatter object stores the *theta* values.

Example: `th = [3 2 4 5 7 2 3];`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`r` — *rho* values

vector | scalar

rho values, specified as a vector or a scalar. `th` and `r` must be the same size.

The RData property of the scatter object stores the *rho* values.

Example: `r = 0:pi/2:2*pi;`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz` — Marker sizes in points squared

`36` (default) | scalar | vector | `[]`

Marker sizes in points squared, specified in one of these forms:

- Scalar — Uniform marker size. For example, `sz = 100` creates all markers with an area of 100 points squared.
- Vector — Different marker size for each data point. The vector must be the same length as `th` and `r`.
- Empty brackets `[]` — Default marker size with an area of 36 points squared. Use this option if you want to specify the color input argument, but use the default marker area; for example, `polarscatter(th,r,[],c)`.

The SizeData property of the scatter object stores the marker sizes.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`c` — Marker colors

character vector of color name | vector | three-column matrix of RGB triplets

Marker colors, specified in one of these forms.

- Character vector of a color name — Uniform marker color, such as `'red'`.

- Vector — Different marker colors for each data point. The values in `c` are linearly mapped to colors in the colormap. The vector must be the same length as `th` and `r`.
- Three-column matrix of RGB triplets — Different marker colors for each data point using RGB triplet colors. The length of the matrix must be the same length as `th` and `r`.

When you specify the marker colors, `polarscatter` sets the `MarkerFaceColor` property of the scatter object to `'flat'` and stores the marker colors in the CData property.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`mkr` — Marker symbol

`'o'` (default) | `'+'` | `'*'` | `'.'` | `'x'` | `'s'` | ...

Marker symbol, specified as one of the marker symbols listed in this table.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

The Marker property of the scatter object stores the marker symbol.

pax — PolarAxes object
PolarAxes object

PolarAxes object. If you do not specify the polar axes, then polarscatter uses the current axes. polarscatter does not support plotting into Cartesian axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of Name,Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside single quotes (' '). You can specify several name and value pair arguments in any order as Name1,Value1,...,NameN,ValueN.

The scatter object properties listed here are only a subset. For a complete list, see Scatter Properties.

Example: polarscatter(th,r,'filled','MarkerFaceAlpha',.5) creates filled, semi-transparent markers.

'MarkerFaceAlpha' — Marker face transparency
1 (default) | scalar in range [0,1]

Marker face transparency, specified as a scalar in the range [0,1]. A value of 1 is opaque and 0 is transparent. Values between 0 and 1 are semi-transparent.

'MarkerEdgeColor' — Marker outline color
'flat' (default) | 'none' | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- 'flat' — Colors defined by the CData property.
- 'none' — No color, which makes unfilled markers invisible.
- RGB triplet or character vector of color name — Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

'MarkerFaceColor' — Marker fill color

'none' (default) | 'flat' | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — No color, which makes the interior invisible.
- 'flat' — Colors defined by the CData property.
- 'auto' — Same color as the Color property for the axes.
- RGB triplet or character vector of a color name— Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]

Long Name	Short Name	RGB Triplet
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

`'LineWidth'` — Width of marker edge
`0.5` (default) | positive value

Width of marker edge, specified as a positive value in point units.

Example: `0.75`

See Also

See Also

Functions
`hold` | `legend` | `polarhistogram` | `polarplot` | `scatter`

Properties
PolarAxes Properties | Scatter Properties

Introduced in R2016b

poly

Polynomial with specified roots or characteristic polynomial

Syntax

```
p = poly(r)
p = poly(A)
```

Description

`p = poly(r)`, where `r` is a vector, returns the coefficients of the polynomial whose roots are the elements of `r`.

`p = poly(A)`, where `A` is an `n`-by-`n` matrix, returns the `n+1` coefficients of the characteristic polynomial of the matrix, `det`($\lambda I - A$).

Examples

Characteristic Polynomial from Eigenvalues

Calculate the eigenvalues of a matrix, `A`.

```
A = [1 8 -10; -4 2 4; -5 2 8]
```

```
A =

     1     8   -10
    -4     2     4
    -5     2     8
```

```
e = eig(A)
```

```
e =
  11.6219 + 0.0000i
  -0.3110 + 2.6704i
```

```
  -0.3110 - 2.6704i
```

Since the eigenvalues in `e` are the roots of the characteristic polynomial of `A`, use `poly` to determine the characteristic polynomial from the values in `e`.

```
p = poly(e)
```

```
p =

    1.0000  -11.0000   -0.0000  -84.0000
```

Characteristic Polynomial of Matrix

Use `poly` to calculate the characteristic polynomial of a matrix, `A`.

```
A = [1 2 3; 4 5 6; 7 8 0]
```

```
A =

     1     2     3
     4     5     6
     7     8     0
```

```
p = poly(A)
```

```
p =

    1.0000   -6.0000  -72.0000  -27.0000
```

Calculate the roots of `p` using `roots`. The roots of the characteristic polynomial are the eigenvalues of matrix `A`.

```
r = roots(p)
```

```
r =

   12.1229
   -5.7345
   -0.3884
```

Input Arguments

r — Polynomial roots
vector

Polynomial roots, specified as a vector.

Example: `poly([2 -3])`

Example: `poly([2 -2 3 -3])`

Example: `poly(roots(k))`

Example: `poly(eig(A))`

Data Types: `single` | `double`
Complex Number Support: Yes

A — Input matrix
matrix

Input matrix.

Example: `poly([0 -1; 1 0])`

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

p — Polynomial coefficients
row vector

Polynomial coefficients, returned as a row vector.

- If the input is a square `n`-by-`n` matrix, `A`, then `p` contains the coefficients for the characteristic polynomial of `A`.
- If the input is a vector of roots, `r`, then `p` contains the coefficients for the polynomial whose roots are in `r`.

In each case, the `n+1` coefficients in `p` describe the polynomial

$$p_1 x^n + p_2 x^{n-1} + \ldots + p_n x + p_{n+1}.$$

Tips

- For vectors, `r = roots(p)` and `p = poly(r)` are inverse functions of each other, up to roundoff error, ordering, and scaling.

Algorithms

The algorithms employed for `poly` and `roots` illustrate an interesting aspect of the modern approach to eigenvalue computation. `poly(A)` generates the characteristic polynomial of `A`, and `roots(poly(A))` finds the roots of that polynomial, which are the eigenvalues of `A`. But both `poly` and `roots` use `eig`, which is based on similarity transformations. The classical approach, which characterizes eigenvalues as roots of the characteristic polynomial, is actually reversed.

If `A` is an `n`-by-`n` matrix, `poly(A)` produces the coefficients `p(1)` through `p(n+1)`, with `p(1) = 1`, in

$$\det(\lambda I - A) = p_1 \lambda^n + \ldots + p_n \lambda + p_{n+1}.$$

The algorithm is

```
z = eig(A);
p = zeros(n+1,1);
p(1) = 1;
for j = 1:n
    p(2:j+1) = p(2:j+1)-z(j)*p(1:j);
end
```

This recursion is derived by expanding the product,

$$(\lambda - \lambda_1)(\lambda - \lambda_2)\ldots(\lambda - \lambda_n).$$

It is possible to prove that `poly(A)` produces the coefficients in the characteristic polynomial of a matrix within roundoff error of `A`. This is true even if the eigenvalues of `A` are badly conditioned. The traditional algorithms for obtaining the characteristic

polynomial do not use the eigenvalues, and do not have such satisfactory numerical properties.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not discard nonfinite input values.
- Complex input produces complex output.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`conv` | `polyval` | `polyvalm` | `residue` | `roots`

Topics

"Create and Evaluate Polynomials"

Introduced before R2006a

polyarea

Area of polygon

Syntax

```
A = polyarea(X,Y)
A = polyarea(X,Y,dim)
```

Description

`A = polyarea(X,Y)` returns the area of the polygon specified by the vertices in the vectors `X` and `Y`.

If `X` and `Y` are matrices of the same size, then `polyarea` returns the area of polygons defined by the columns `X` and `Y`.

If `X` and `Y` are multidimensional arrays, `polyarea` returns the area of the polygons in the first nonsingleton dimension of `X` and `Y`.

`A = polyarea(X,Y,dim)` operates along the dimension specified by scalar `dim`.

Examples

Find Area of Polygon

```
L = linspace(0,2.*pi,9);
xv = 1.2*cos(L)';
yv = 1.2*sin(L)';

A = polyarea(xv,yv)
```

```
A = 4.0729
```

```
plot(xv,yv);
title(['Area = ' num2str(A)])
axis image
```

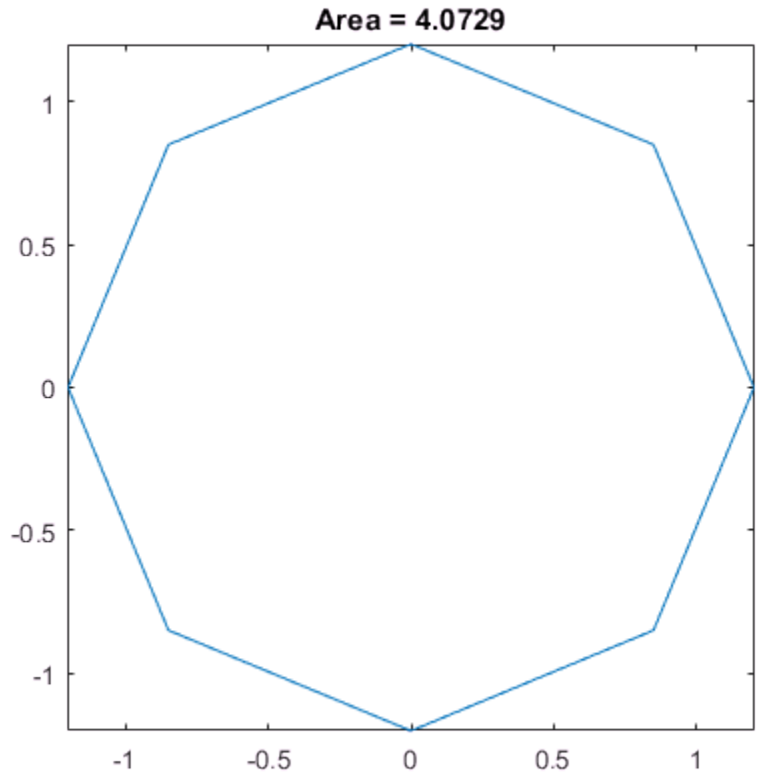

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`convhull` | `inpolygon` | `rectint`

Introduced before R2006a

polyder

Polynomial differentiation

Syntax

```
k = polyder(p)
k = polyder(a,b)
[q,d] = polyder(a,b)
```

Description

`k = polyder(p)` returns the derivative of the polynomial represented by the coefficients in `p`,

$$k(x) = \frac{d}{dx} p(x).$$

`k = polyder(a,b)` returns the derivative of the product of the polynomials `a` and `b`,

$$k(x) = \frac{d}{dx}\left[a(x)b(x)\right].$$

`[q,d] = polyder(a,b)` returns the derivative of the quotient of the polynomials `a` and `b`,

$$\frac{q(x)}{d(x)} = \frac{d}{dx}\left[\frac{a(x)}{b(x)}\right].$$

Examples

Differentiate Polynomial

Create a vector to represent the polynomial $p(x) = 3x^5 - 2x^3 + x + 5$.

```
p = [3 0 -2 0 1 5];
```

Use `polyder` to differentiate the polynomial. The result is $q(x) = 15x^4 - 6x^2 + 1$.

```
q = polyder(p)
```

```
q =

    15     0    -6     0     1
```

Differentiate Product of Polynomials

Create two vectors to represent the polynomials $a(x) = x^4 - 2x^3 + 11$ and $b(x) = x^2 - 10x + 15$.

```
a = [1 -2 0 0 11];
b = [1 -10 15];
```

Use `polyder` to calculate

$$q(x) = \frac{d}{dx}\left[a(x)b(x)\right].$$

```
q = polyder(a,b)
```

```
q =

     6   -60   140   -90    22  -110
```

The result is

$$q(x) = 6x^5 - 60x^4 + 140x^3 - 90x^2 + 22x - 110.$$

Differentiate Quotient of Polynomials

Create two vectors to represent the polynomials in the quotient,

$$\frac{x^4 - 3x^2 - 1}{x + 4}.$$

```
p = [1 0 -3 0 -1];
v = [1 4];
```

Use `polyder` with two output arguments to calculate

$$\frac{q(x)}{d(x)} = \frac{d}{dx}\left[\frac{p(x)}{v(x)}\right].$$

```
[q,d] = polyder(p,v)
```

```
q =

     3    16    -3   -24     1


d =

     1     8    16
```

The result is

$$\frac{q(x)}{d(x)} = \frac{3x^4 + 16x^3 - 3x^2 - 24x + 1}{x^2 + 8x + 16}.$$

Input Arguments

p — Polynomial coefficients

vector

Polynomial coefficients, specified as a vector. For example, the vector `[1 0 1]` represents the polynomial $x^2 + 1$, and the vector `[3.13 -2.21 5.99]` represents the polynomial $3.13x^2 - 2.21x + 5.99$.

For more information, see “Create and Evaluate Polynomials”.

Data Types: `single` | `double`
Complex Number Support: Yes

a , b — Polynomial coefficients (as separate arguments)
row vectors

Polynomial coefficients, specified as two separate arguments of row vectors.

For more information, see “Create and Evaluate Polynomials”.

Example: `polyder([1 0 -1],[10 2])`

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

k — Integrated polynomial coefficients
row vector

Integrated polynomial coefficients, returned as a row vector.

q — Numerator polynomial
row vector

Numerator polynomial, returned as a row vector.

d — Denominator polynomial
row vector

Denominator polynomial, returned as a row vector.

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The output can contain fewer `NaN`s than the MATLAB output. However, if the input contains a `NaN`, the output contains at least one `NaN`.

See Also

See Also

`conv` | `deconv` | `polyint` | `polyval`

Topics

"Create and Evaluate Polynomials"
"Integrate and Differentiate Polynomials"

Introduced before R2006a

polyeig

Polynomial eigenvalue problem

Syntax

```
e = polyeig(A0,A1,...,Ap)
[X,e] = polyeig(A0,A1,...,Ap)
[X,e,s] = polyeig(A0,A1,...,Ap)
```

Description

`e = polyeig(A0,A1,...,Ap)` returns the eigenvalues for the polynomial eigenvalue problem of degree `p`.

`[X,e] = polyeig(A0,A1,...,Ap)` also returns matrix `X`, of size `n`-by-`n*p`, whose columns are the eigenvectors.

`[X,e,s] = polyeig(A0,A1,...,Ap)` additionally returns vector `s`, of length `p*n`, containing condition numbers for the eigenvalues. At least one of `A0` and `Ap` must be nonsingular. Large condition numbers imply that the problem is close to a problem with repeated eigenvalues.

Examples

Quadratic Eigenvalue Problem with Mass, Damping, and Stiffness Matrices

Solve a quadratic eigenvalue problem involving a mass matrix `M`, damping matrix `C`, and stiffness matrix `K`. This quadratic eigenvalue problem arises from the equation of motion:

$$M\frac{d^2y}{dt^2} + C\frac{dy}{dt} + Ky = f(t)$$

This equation applies to a broad range of oscillating systems, including a dynamic mass-spring system or RLC electronic network. The fundamental solution is $y(t) = xe^{\lambda t}$, so both λ and `x` must solve the quadratic eigenvalue problem (QEP),

$$\left(M\lambda^2 + C\lambda + K\right)x = 0$$

Create coefficient matrices M, C, and K to represent a mass-spring system with four-degrees-of-freedom. The coefficient matrices are all symmetric and positive semidefinite, and M is a diagonal matrix.

```
M = diag([3 1 3 1])
```

```
M =

     3     0     0     0
     0     1     0     0
     0     0     3     0
     0     0     0     1
```

```
C = [0.4 0 -0.3 0; 0 0 0 0; -0.3 0 0.5 -0.2; 0 0 -0.2 0.2]
```

```
C =

    0.4000         0   -0.3000         0
         0         0         0         0
   -0.3000         0    0.5000   -0.2000
         0         0   -0.2000    0.2000
```

```
K = [-7 2 4  0; 2 -4 2 0; 4 2 -9 3; 0 0 3 -3]
```

```
K =

    -7     2     4     0
     2    -4     2     0
     4     2    -9     3
     0     0     3    -3
```

Solve the QEP for the eigenvalues, eigenvectors, and condition numbers using `polyeig`.

```
[X,e,s] = polyeig(K,C,M)
```

```
X =

    0.1828   -0.3421    0.3989    0.0621    0.3890   -0.4143   -0.4575    0.4563
    0.3530    0.9296    0.3330   -0.8571   -0.6366   -0.2717   -0.4981    0.4985
```

```
   -0.5360    0.0456   -0.1724    0.3509   -0.3423    0.1666   -0.5106    0.5107
    0.7448   -0.1295   -0.8368   -0.3720    0.5712    0.8525   -0.5309    0.5315


e =

   -2.4498
   -2.1536
   -1.6248
    2.2279
    2.0364
    1.4752
    0.3353
   -0.3466


s =

    0.5813
    0.8609
    1.2232
    0.7855
    0.7012
    1.2922
   10.1097
   10.0519
```

Check that the first eigenvalue, `e(1)`, and first eigenvector, `X(:,1)`, satisfy the QEP equation. The result is close to, but not exactly, zero.

```
lambda = e(1);
x = X(:,1);
(M*lambda^2 + C*lambda + K)*x

ans =

   1.0e-13 *

    0.1066
   -0.0444
    0.0178
   -0.0044
```

Input Arguments

A0,A1,...,Ap — Square coefficient matrices (as separate arguments)
matrices

Square coefficient matrices, specified as separate arguments. The matrices must all have the same order, `n`.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

e — Eigenvalues
vector

Eigenvalues, returned as a vector.

X — Eigenvectors
matrix

Eigenvectors, returned in the columns of a matrix. The first eigenvector is `X(:,1)`, the second is `X(:,2)`, and so on.

s — Condition numbers
vector

Condition numbers, returned as a vector. The condition numbers in `s` correspond to similarly located eigenvalues in `e`. Large condition numbers indicate that the problem is close to having repeated eigenvalues.

Definitions

Polynomial Eigenvalue Problem

The polynomial eigenvalue problem is a variant of the standard eigenvalue problem, $Ax = \lambda x$, but instead involves polynomials rather than linear terms.

As with the standard eigenvalue problem, the solution involves finding the eigenvalues and eigenvectors that satisfy the equation,

$$\left(A_0 + \lambda A_1 + \ldots + \lambda^P A_p\right)x = 0,$$

where the polynomial degree, `p`, is a nonnegative integer, and `A0,A1,...Ap` are square coefficient matrices of order `n`.

The most common form is the *quadratic* polynomial eigenvalue problem, which is

$$\left(A_2\lambda^2 + A_1\lambda + A_0\right)x = 0.$$

One major difference between the quadratic eigenvalue problem and the standard (or generalized) eigenvalue problem is that there can be up to `2n` eigenvalues with up to `2n` right and left eigenvectors. In cases where there are more than `n` eigenvectors, the eigenvectors do not form a linearly independent set. See [1] and [2] for more detailed information about the quadratic eigenvalue problem.

Tips

- `polyeig` handles the following simplified cases:
  - `p = 0`, or `polyeig(A)`, is the standard eigenvalue problem, `eig(A)`.
  - `p = 1`, or `polyeig(A,B)`, is the generalized eigenvalue problem, `eig(A,-B)`.
  - `n = 0`, or `polyeig(a0,a1,...,ap)`, is the standard polynomial problem, `roots([ap ... a1 a0])`, where `a0,a1,...,ap` are scalars.

Algorithms

The `polyeig` function uses the QZ factorization to find intermediate results in the computation of generalized eigenvalues. `polyeig` uses the intermediate results to determine if the eigenvalues are well-determined. See the descriptions of `eig` and `qz` for more information.

The computed solutions might not exist or be unique, and can also be computationally inaccurate. If both `A0` and `Ap` are singular matrices, then the problem might be ill-posed. If only one of `A0` and `Ap` is singular, then some of the eigenvalues might be `0` or `Inf`.

Scaling `A0,A1,...,Ap` to have `norm(Ai)` roughly equal to `1` might increase the accuracy of `polyeig`. In general, however, this improved accuracy is not achievable. (See Tisseur [3] for details).

References

[1] Dedieu, Jean-Pierre, and Francoise Tisseur. "Perturbation theory for homogeneous polynomial eigenvalue problems." *Linear Algebra Appl.* Vol. 358, 2003, pp. 71–94.

[2] Tisseur, Francoise, and Karl Meerbergen. "The quadratic eigenvalue problem." *SIAM Rev.* Vol. 43, Number 2, 2001, pp. 235–286.

[3] Francoise Tisseur. "Backward error and condition of polynomial eigenvalue problems." *Linear Algebra Appl.* Vol. 309, 2000, pp. 339–361.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The basis of the eigenvectors can be different in the generated code than in MATLAB. In general, in the eigenvalues output, the eigenvalues for real inputs are not sorted so that complex conjugate pairs are adjacent.
- Differences in eigenvectors and ordering of eigenvalues can lead to differences in the condition numbers output.

See Also

See Also

`cond` | `condeig` | `eig` | `qz`

Topics

"Create and Evaluate Polynomials"

Introduced before R2006a

polyfit

Polynomial curve fitting

Syntax

```
p = polyfit(x,y,n)
[p,S] = polyfit(x,y,n)
[p,S,mu] = polyfit(x,y,n)
```

Description

`p = polyfit(x,y,n)` returns the coefficients for a polynomial `p(x)` of degree `n` that is a best fit (in a least-squares sense) for the data in `y`. The coefficients in `p` are in descending powers, and the length of `p` is `n+1`

$$p(x) = p_1 x^n + p_2 x^{n-1} + \ldots + p_n x + p_{n+1}.$$

`[p,S] = polyfit(x,y,n)` also returns a structure `S` that can be used as an input to `polyval` to obtain error estimates.

`[p,S,mu] = polyfit(x,y,n)` also returns `mu`, which is a two-element vector with centering and scaling values. `mu(1)` is `mean(x)`, and `mu(2)` is `std(x)`. Using these values, `polyfit` centers `x` at zero and scales it to have unit standard deviation

$$\hat{x} = \frac{x - \bar{x}}{\sigma_x}.$$

This centering and scaling transformation improves the numerical properties of both the polynomial and the fitting algorithm.

Examples

Fit Polynomial to Trigonometric Function

Generate 10 points equally spaced along a sine curve in the interval `[0,4*pi]`.

```
x = linspace(0,4*pi,10);
```

```
y = sin(x);
```

Use `polyfit` to fit a 7th-degree polynomial to the points.

```
p = polyfit(x,y,7);
```

Evaluate the polynomial on a finer grid and plot the results.

```
x1 = linspace(0,4*pi);
y1 = polyval(p,x1);
figure
plot(x,y,'o')
hold on
plot(x1,y1)
hold off
```

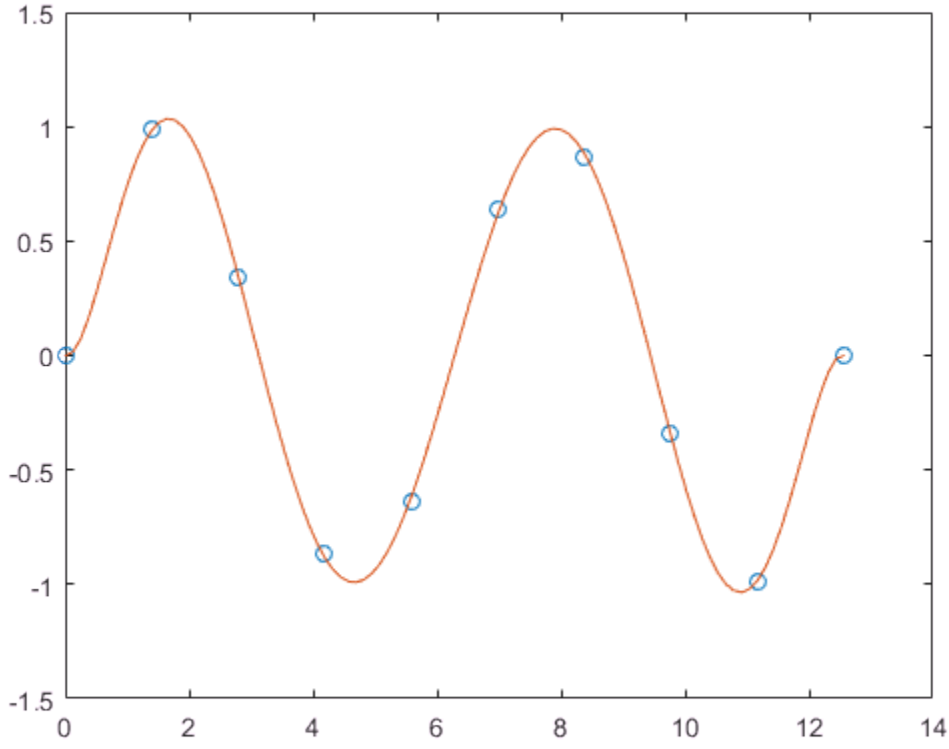

Fit Polynomial to Set of Points

Create a vector of 5 equally spaced points in the interval `[0,1]`, and evaluate $y(x) = (1 + x)^{-1}$ at those points.

```
x = linspace(0,1,5);
y = 1./(1+x);
```

Fit a polynomial of degree 4 to the 5 points. In general, for `n` points, you can fit a polynomial of degree `n-1` to exactly pass through the points.

```
p = polyfit(x,y,4);
```

Evaluate the original function and the polynomial fit on a finer grid of points between 0 and 2.

```
x1 = linspace(0,2);
y1 = 1./(1+x1);
f1 = polyval(p,x1);
```

Plot the function values and the polynomial fit in the wider interval `[0,2]`, with the points used to obtain the polynomial fit highlighted as circles. The polynomial fit is good in the original `[0,1]` interval, but quickly diverges from the fitted function outside of that interval.

```
figure
plot(x,y,'o')
hold on
plot(x1,y1)
plot(x1,f1,'r--')
legend('y','y1','f1')
```

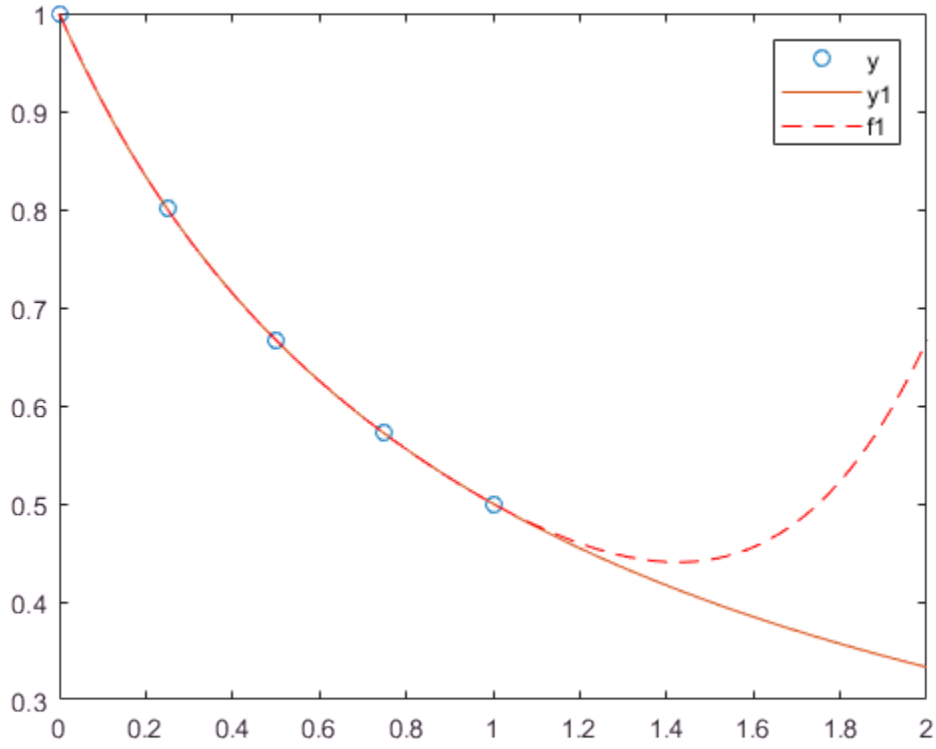

Fit Polynomial to Error Function

First generate a vector of `x` points, equally spaced in the interval `[0,2.5]`, and then evaluate `erf(x)` at those points.

```
x = (0:0.1:2.5)';
y = erf(x);
```

Determine the coefficients of the approximating polynomial of degree 6.

```
p = polyfit(x,y,6)
```

```
p =
```

```
    0.0084   -0.0983    0.4217   -0.7435    0.1471    1.1064    0.0004
```

To see how good the fit is, evaluate the polynomial at the data points and generate a table showing the data, fit, and error.

```
f = polyval(p,x);
T = table(x,y,f,y-f,'VariableNames',{'X','Y','Fit','FitError'})
```

```
T = 26×4 table
     X        Y          Fit         FitError
    ___    _______    __________    __________

      0          0    0.00044117    -0.00044117
    0.1    0.11246       0.11185     0.00060836
    0.2     0.2227       0.22231     0.00039189
    0.3    0.32863       0.32872    -9.7429e-05
    0.4    0.42839        0.4288    -0.00040661
    0.5     0.5205       0.52093    -0.00042568
    0.6    0.60386       0.60408    -0.00022824
    0.7     0.6778       0.67775     4.6383e-05
    0.8     0.7421       0.74183     0.00026992
    0.9    0.79691       0.79654     0.00036515
      1     0.8427       0.84238      0.0003164
    1.1    0.88021       0.88005     0.00015948
    1.2    0.91031       0.91035    -3.9919e-05
    1.3    0.93401       0.93422      -0.000211
    1.4    0.95229       0.95258    -0.00029933
    1.5    0.96611       0.96639    -0.00028097
    1.6    0.97635       0.97652    -0.00016704
    1.7    0.98379       0.98379     8.3306e-07
    1.8    0.98909       0.98893     0.00016278
    1.9    0.99279       0.99253     0.00025791
      2    0.99532       0.99508     0.00024347
    2.1    0.99702       0.99691      0.0001131
    2.2    0.99814       0.99823    -8.8548e-05
    2.3    0.99886       0.99911    -0.00025673
    2.4    0.99931       0.99954    -0.00022451
    2.5    0.99959       0.99936     0.00023151
```

In this interval, the interpolated values and the actual values agree fairly closely. Create a plot to show how outside this interval, the extrapolated values quickly diverge from the actual data.

```
x1 = (0:0.1:5)';
y1 = erf(x1);
f1 = polyval(p,x1);
figure
plot(x,y,'o')
hold on
plot(x1,y1,'-')
plot(x1,f1,'r--')
axis([0  5  0  2])
hold off
```

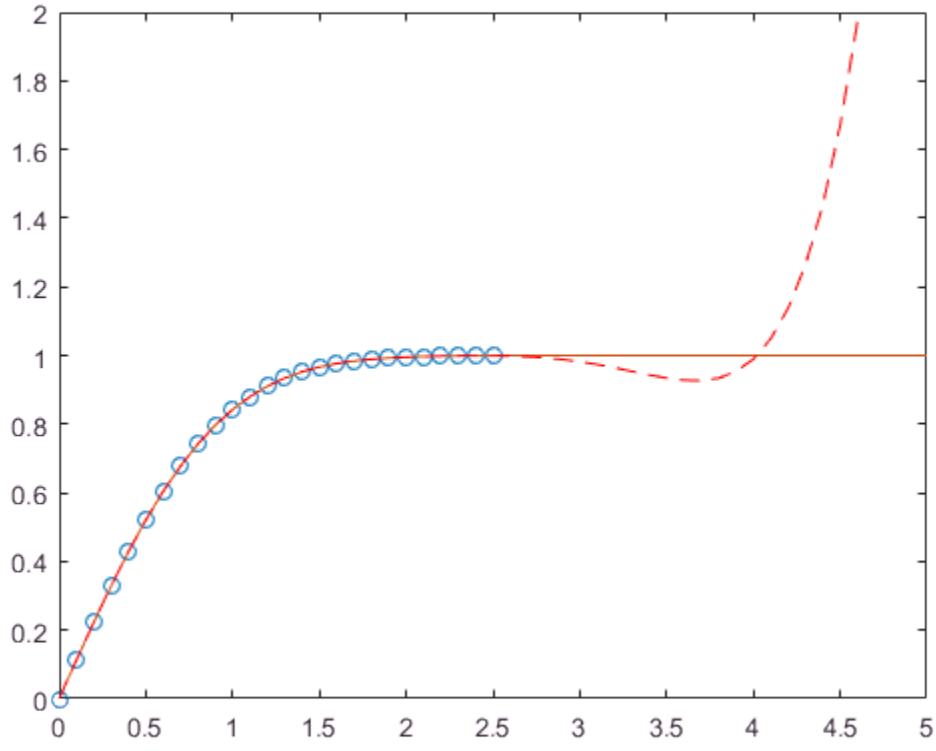

Use Centering and Scaling to Improve Numerical Properties

Create a table of population data for the years 1750 - 2000 and plot the data points.

```
year = (1750:25:2000)';
pop = 1e6*[791 856 978 1050 1262 1544 1650 2532 6122 8170 11560]';
T = table(year, pop)
```

```
T = 11×2 table
    year       pop
    ____    ________

    1750     7.91e+08
    1775     8.56e+08
    1800     9.78e+08
    1825     1.05e+09
    1850    1.262e+09
    1875    1.544e+09
    1900     1.65e+09
    1925    2.532e+09
    1950    6.122e+09
    1975     8.17e+09
    2000    1.156e+10
```

```
plot(year,pop,'o')
```

Use `polyfit` with three outputs to fit a 5th-degree polynomial using centering and scaling, which improves the numerical properties of the problem. `polyfit` centers the data in `year` at 0 and scales it to have a standard deviation of 1, which avoids an ill-conditioned Vandermonde matrix in the fit calculation.

```
[p,~,mu] = polyfit(T.year, T.pop, 5);
```

Use `polyval` with four inputs to evaluate `p` with the scaled years, `(year-mu(1))/mu(2)`. Plot the results against the original years.

```
f = polyval(p,year,[],mu);
hold on
plot(year,f)
hold off
```

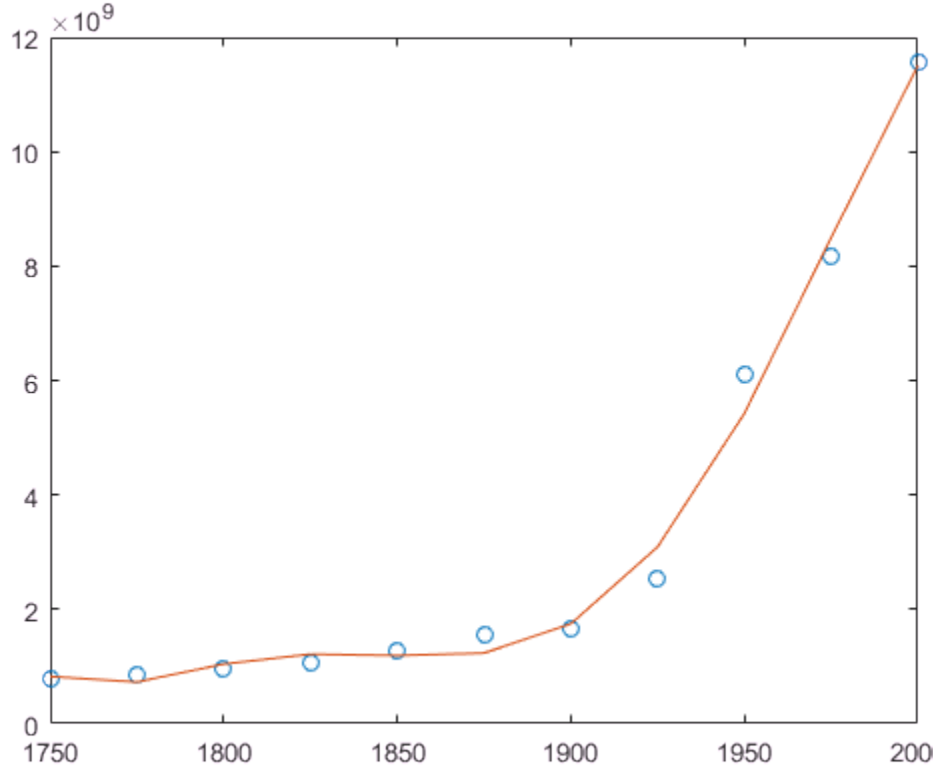

Input Arguments

x — Query points

vector

Query points, specified as a vector. The points in x correspond to the fitted function values contained in y.

Warning messages result when x has repeated (or nearly repeated) points or if x might need centering and scaling.

Data Types: `single` | `double`
Complex Number Support: Yes

y — Fitted values at query points
vector

Fitted values at query points, specified as a vector. The values in `y` correspond to the query points contained in `x`.

Data Types: `single` | `double`
Complex Number Support: Yes

n — Degree of polynomial fit
positive integer scalar

Degree of polynomial fit, specified as a positive integer scalar. `n` specifies the polynomial power of the left-most coefficient in `p`.

Output Arguments

p — Least-squares fit polynomial coefficients
vector

Least-squares fit polynomial coefficients, returned as a vector. `p` has length `n+1` and contains the polynomial coefficients in descending powers, with the highest power being `n`. If either `x` or `y` contain `NaN` values and `n < length(x)`, then all elements in `p` are `NaN`.

Use `polyval` to evaluate `p` at query points.

S — Error estimation structure
structure

Error estimation structure. This optional output structure is primarily used as an input to the `polyval` function to obtain error estimates. `S` contains the following fields:

Field	Description
`R`	Triangular factor from a QR decomposition of the Vandermonde matrix of `x`

Field	Description
`df`	Degrees of freedom
`normr`	Norm of the residuals

If the data in `y` is random, then an estimate of the covariance matrix of `p` is `(Rinv*Rinv')*normr^2/df`, where `Rinv` is the inverse of `R`.

If the errors in the data in `y` are independent and normal with constant variance, then `[y,delta] = polyval(...)` produces error bounds that contain at least 50% of the predictions. That is, `y` ± `delta` contains at least 50% of the predictions of future observations at `x`.

`mu` — Centering and scaling values
two element vector

Centering and scaling values, returned as a two element vector. `mu(1)` is `mean(x)`, and `mu(2)` is `std(x)`. These values center the query points in `x` at zero with unit standard deviation.

Use `mu` as the fourth input to `polyval` to evaluate `p` at the scaled points, `(x - mu(1))/mu(2)`.

Limitations

- In problems with many points, increasing the degree of the polynomial fit using `polyfit` does not always result in a better fit. High-order polynomials can be oscillatory between the data points, leading to a *poorer* fit to the data. In those cases, you might use a low-order polynomial fit (which tends to be smoother between points) or a different technique, depending on the problem.
- Polynomials are unbounded, oscillatory functions by nature. Therefore, they are not well-suited to extrapolating bounded data or monotonic (increasing or decreasing) data.

Algorithms

`polyfit` uses `x` to form Vandermonde matrix `V` with `n+1` columns and `m = length(x)` rows, resulting in the linear system

$$\begin{pmatrix} x_1^n & x_1^{n-1} & \cdots & 1 \\ x_2^n & x_2^{n-1} & \cdots & 1 \\ \vdots & \vdots & \ddots & \vdots \\ x_m^n & x_m^{n-1} & \cdots & 1 \end{pmatrix} \begin{pmatrix} p_1 \\ p_2 \\ \vdots \\ p_n \end{pmatrix} = \begin{pmatrix} y_1 \\ y_2 \\ \vdots \\ y_m \end{pmatrix},$$

which `polyfit` solves with `p = V\y`. Since the columns in the Vandermonde matrix are powers of the vector `x`, the condition number of `V` is often large for high-order fits, resulting in a singular coefficient matrix. In those cases centering and scaling can improve the numerical properties of the system to produce a more reliable fit.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`cov` | `lscov` | `poly` | `polyder` | `polyint` | `polyval` | `roots`

Topics

"Programmatic Fitting"

Introduced before R2006a

polyint

Polynomial integration

Syntax

```
q = polyint(p,k)
q = polyint(p)
```

Description

`q = polyint(p,k)` returns the integral of the polynomial represented by the coefficients in `p` using a constant of integration `k`.

`q = polyint(p)` assumes a constant of integration `k = 0`.

Examples

Integrate Quartic Polynomial

Evaluate

$$I = \int_{-1}^{3} \left(3x^4 - 4x^2 + 10x - 25\right) dx$$

Create a vector to represent the polynomial $3x^4 - 4x^2 + 10x - 25$.

```
p = [3 0 -4 10 -25];
```

Use `polyint` to integrate the polynomial using a constant of integration equal to `0`.

```
q = polyint(p)
```

```
q =

    0.6000         0   -1.3333    5.0000  -25.0000         0
```

Find the value of the integral, `I`, by evaluating `q` at the limits of integration.

```
a = -1;
b = 3;
I = diff(polyval(q,[a b]))
```

```
I = 49.0667
```

Integrate Product of Two Polynomials

Evaluate

$$I = \int_0^2 \left(x^5 - x^3 + 1\right)\left(x^2 + 1\right) dx$$

Create vectors to represent the polynomials $p(x) = x^5 - x^3 + 1$ and $v(x) = x^2 + 1$.

```
p = [1 0 -1 0 0 1];
v = [1 0 1];
```

Multiply the polynomials and integrate the resulting expression using a constant of integration `k = 3`.

```
k = 3;
q = polyint(conv(p,v),k)
```

```
q =

    0.1250         0         0         0   -0.2500    0.3333         0    1.0000    3.0
```

Find the value of `I` by evaluating `q` at the limits of integration.

```
a = 0;
b = 2;
I = diff(polyval(q,[a b]))
```

```
I = 32.6667
```

- "Analytic Solution to Integral of Polynomial"

Input Arguments

p — Polynomial coefficients

vector

Polynomial coefficients, specified as a vector. For example, the vector `[1 0 1]` represents the polynomial x^2+1, and the vector `[3.13 -2.21 5.99]` represents the polynomial $3.13x^2-2.21x+5.99$.

For more information, see "Create and Evaluate Polynomials".

Data Types: `single` | `double`
Complex Number Support: Yes

k — Constant of integration

numeric scalar

Constant of integration, specified as a numeric scalar.

Example: `polyint([1 0 0],3)`

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

q — Integrated polynomial coefficients

row vector

Integrated polynomial coefficients, returned as a row vector. For more information, see "Create and Evaluate Polynomials".

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`polyder` | `polyfit` | `polyval` | `polyvalm`

Topics

"Analytic Solution to Integral of Polynomial"
"Create and Evaluate Polynomials"
"Integrate and Differentiate Polynomials"

Introduced before R2006a

polyval

Polynomial evaluation

Syntax

```
y = polyval(p,x)
[y,delta] = polyval(p,x,S)
y = polyval(p,x,[],mu)
[y,delta] = polyval(p,x,S,mu)
```

Description

`y = polyval(p,x)` returns the value of a polynomial of degree `n` evaluated at `x`. The input argument `p` is a vector of length `n+1` whose elements are the coefficients in descending powers of the polynomial to be evaluated.

$y = p_1x^n + p_2x^{n-1} + \ldots + p_nx + p_{n+1}$

`x` can be a matrix or a vector. In either case, `polyval` evaluates `p` at each element of `x`.

`[y,delta] = polyval(p,x,S)` uses the optional output structure `S` generated by `polyfit` to generate error estimates `delta`. `delta` is an estimate of the standard deviation of the error in predicting a future observation at `x` by `p(x)`. If the coefficients in `p` are least squares estimates computed by `polyfit`, and the errors in the data input to `polyfit` are independent, normal, and have constant variance, then `y±delta` contains at least 50% of the predictions of future observations at `x`.

`y = polyval(p,x,[],mu)` or `[y,delta] = polyval(p,x,S,mu)` use $\hat{x} = (x - \mu_1)/\mu_2$ in place of `x`. In this equation, $\mu_1 = \text{mean}(x)$ and $\mu_2 = \text{std}(x)$. The centering and scaling parameters `mu` = [μ_1,μ_2] are optional output computed by `polyfit`.

Examples

The polynomial $p(x) = 3x^2 + 2x + 1$ is evaluated at $x = 5$, 7, and 9 with

```
p = [3 2 1];
polyval(p,[5 7 9])
```

which results in

```
ans =

    86   162   262
```

For another example, see `polyfit`.

Tips

The `polyvalm(p,x)` function, with `x` a matrix, evaluates the polynomial in a matrix sense. See `polyvalm` for more information.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`polyfit` | `polyvalm` | `polyder` | `polyint`

Introduced before R2006a

polyvalm

Matrix polynomial evaluation

Syntax

```
Y = polyvalm(p,X)
```

Description

`Y = polyvalm(p,X)` returns the evaluation of polynomial `p` in a matrix sense. This evaluation is the same as substituting matrix `X` in the polynomial, `p`.

Examples

Matrix Evaluation of Characteristic Polynomial

Find the characteristic polynomial of a Pascal Matrix of order 4.

```
X =  pascal(4)
```

```
X =

     1     1     1     1
     1     2     3     4
     1     3     6    10
     1     4    10    20
```

```
p = poly(X)
```

```
p =

    1.0000  -29.0000   72.0000  -29.0000    1.0000
```

The characteristic polynomial is

$$p(x) = x^4 - 29x^3 + 72x^2 - 29x + 1$$

Pascal matrices have the property that the vector of coefficients of the characteristic polynomial is the same forward and backward (palindromic).

Substitute the matrix, X, into the characteristic equation, p. The result is very close to being a zero matrix. This example is an instance of the Cayley-Hamilton theorem, where a matrix satisfies its own characteristic equation.

```
Y = polyvalm(p,X)
```

```
Y =

   1.0e-10 *

   -0.0013   -0.0063   -0.0104   -0.0241
   -0.0048   -0.0217   -0.0358   -0.0795
   -0.0114   -0.0510   -0.0818   -0.1805
   -0.0228   -0.0970   -0.1553   -0.3396
```

Input Arguments

p — Polynomial coefficients

vector

Polynomial coefficients, specified as a vector. For example, the vector `[1 0 1]` represents the polynomial x^2+1, and the vector `[3.13 -2.21 5.99]` represents the polynomial $3.13x^2-2.21x+5.99$.

For more information, see “Create and Evaluate Polynomials”.

Data Types: `single` | `double`
Complex Number Support: Yes

X — Input matrix

square matrix

Input matrix, specified as a square matrix.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Output polynomial coefficients
row vector

Output polynomial coefficients, returned as a row vector.

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also
`polyfit` | `polyval`

Topics
"Create and Evaluate Polynomials"

Introduced before R2006a

posixtime

Convert MATLAB datetime to POSIX time

Syntax

```
p = posixtime(t)
```

Description

`p = posixtime(t)` returns POSIX times equivalent to the `datetime` values in `t`. The POSIX time is the number of seconds (including fractional seconds) elapsed since 00:00:00 1-Jan-1970 UTC (Universal Coordinated Time), ignoring leap seconds. `p` is a `double` array.

- If the time zone of `t` is not specified, then `posixtime` treats the times in `t` as UTC times. This interpretation might differ from your treatment of "unzoned" `datetime` arrays in other contexts. For example, you might think of `datetime('now')` as returning your local time. However, `posixtime` interprets it as a UTC time.
- If the time zone of `t` is specified, then `posixtime` uses the offset for the time zone to compute POSIX times with respect to UTC.

The best practice is to specify the time zone of `t` before calling `posixtime`.

Examples

Convert Datetime Array to POSIX Times

Create `datetime` values and convert them to the equivalent POSIX® times. Show the differences in POSIX times between zoned and unzoned `datetime` values. The best practice is to specify a time zone for a `datetime` array before calling `posixtime`.

Create a `datetime` array and specify its time zone.

```
t1 = datetime('2016-07-29 10:05:24') + calmonths(1:3);
t1.TimeZone = 'America/New_York'
```

```
t1 = 1×3 datetime array
   29-Aug-2016 10:05:24   29-Sep-2016 10:05:24   29-Oct-2016 10:05:24
```

Convert `t1` to the equivalent POSIX times. `posixtime` accounts for the time zone offset when it computes POSIX times.

```
format longG
p1 = posixtime(t1)
```

```
p1 =
                 1472479524                 1475157924                 1477749924
```

Create a `datetime` array with the same values as `t1`, but with no time zone. Convert it to the equivalent POSIX times. `posixtime` treats the times in `t2` as UTC times, with no time zone offset.

```
t2 = datetime('2016-07-29 10:05:24') + calmonths(1:3);
p2 = posixtime(t2)
```

```
p2 =
                 1472465124                 1475143524                 1477735524
```

Show the differences between `p2` and `p1`. The differences are equal to the time offset, in seconds, between UTC and the time zone of `t1`.

```
p2 - p1
```

```
ans =
      -14400       -14400       -14400
```

- "Convert Date and Time to Julian Date or POSIX Time"

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`datenum` | `datetime` | `exceltime` | `juliandate` | `yyyymmdd`

Topics

“Convert Date and Time to Julian Date or POSIX Time”

Introduced in R2014b

pow2

Base 2 power and scale floating-point numbers

Syntax

```
X = pow2(Y)
X = pow2(F,E)
```

Description

`X = pow2(Y)` returns an array `X` whose elements are 2 raised to the power `Y`.

`X = pow2(F,E)` computes $x = f * 2^e$ for corresponding elements of `F` and `E`. The result is computed quickly by simply adding `E` to the floating-point exponent of `F`. Arguments `F` and `E` are real and integer arrays, respectively.

Examples

For IEEE arithmetic, the statement `X = pow2(F,E)` yields the values:

```
F          E         X
1/2        1         1
pi/4       2         pi
-3/4       2         -3
1/2        -51       eps
1-eps/2    1024      realmax
1/2        -1021     realmin
```

Tips

This function corresponds to the ANSI C function `ldexp()` and the IEEE floating-point standard function `scalbn()`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`exp` | `hex2num` | `log2` | `mpower` | `power` | `realmax` | `realmin`

Introduced before R2006a

power, .^

Element-wise power

Syntax

```
C = A.^B
C = power(A,B)
```

Description

`C = A.^B` raises each element of `A` to the corresponding power in `B`.

`C = power(A,B)` is an alternate way to execute `A.^B`, but is rarely used. It enables operator overloading for classes.

Examples

Square Each Element of Vector

Create a vector, `A`, and square each element.

```
A = 1:5;
C = A.^2
```

```
C =

     1     4     9    16    25
```

Find Inverse of Each Matrix Element

Create a matrix, `A`, and take the inverse of each element.

```
A = [1 2 3; 4 5 6; 7 8 9];
C = A.^-1
```

```
C =

    1.0000    0.5000    0.3333
    0.2500    0.2000    0.1667
    0.1429    0.1250    0.1111
```

An inversion of the elements is not equal to the inverse of the matrix, which is instead written `A^-1` or `inv(A)`.

Find Roots of Number

Calculate the roots of `-1` to the `1/3` power.

```
A = -1;
B = 1/3;
C = A.^B
```

```
C =
   0.5000 + 0.8660i
```

For negative base `A` and noninteger `B`, if `abs(B)` is less than `1`, the `power` function returns the complex roots of `A`.

Use the `nthroot` function to obtain the real roots.

```
C = nthroot(A,3)
```

```
C = -1
```

Input Arguments

A — Base

scalar | vector | matrix | multidimensional array

Base, specified as a scalar, vector, matrix, or multidimensional array. Inputs `A` and `B` must either be the same size or have sizes that are compatible (for example, `A` is an `M`-by-`N` matrix and `B` is a scalar or `1`-by-`N` row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

B — Exponent
scalar | vector | matrix | multidimensional array

Exponent, specified as a scalar, vector, matrix, or multidimensional array. Inputs `A` and `B` must either be the same size or have sizes that are compatible (for example, `A` is an `M`-by-`N` matrix and `B` is a scalar or `1`-by-`N` row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- When both `X` and `Y` are real, but `power(X,Y)` is complex, simulation produces an error and generated code returns `NaN`. To get the complex result, make the input value `X` complex by passing in `complex(X)`. For example, `power(complex(X),Y)`.
- When both `X` and `Y` are real, but `X .^ Y` is complex, simulation produces an error and generated code returns `NaN`. To get the complex result, make the input value `X` complex by using `complex(X)`. For example, `complex(X).^Y`.

See Also

See Also

`mpower` | `nthroot` | `realpow`

Topics

"Array vs. Matrix Operations"
"Operator Precedence"
"MATLAB Operators and Special Characters"

Introduced before R2006a

ppval

Evaluate piecewise polynomial

Syntax

```
v = ppval(pp,xq)
```

Description

`v = ppval(pp,xq)` evaluates the piecewise polynomial `pp` at the query points `xq`.

Examples

Create Piecewise Polynomial

Create a piecewise polynomial that has a cubic polynomial in the interval [0,4], a quadratic polynomial in the interval [4,10], and a quartic polynomial in the interval [10,15].

```
breaks = [0 4 10 15];
coefs = [0 1 -1 1 1; 0 0 1 -2 53; -1 6 1 4 77];
pp = mkpp(breaks,coefs)
```

```
pp = struct with fields:
      form: 'pp'
    breaks: [0 4 10 15]
     coefs: [3×5 double]
    pieces: 3
     order: 5
       dim: 1
```

Evaluate the piecewise polynomial at many points in the interval [0,15] and plot the results. Plot vertical dashed lines at the break points where the polynomials meet.

```
xq = 0:0.01:15;
plot(xq,ppval(pp,xq))
line([4 4],ylim,'LineStyle','--','Color','k')
line([10 10],ylim,'LineStyle','--','Color','k')
```

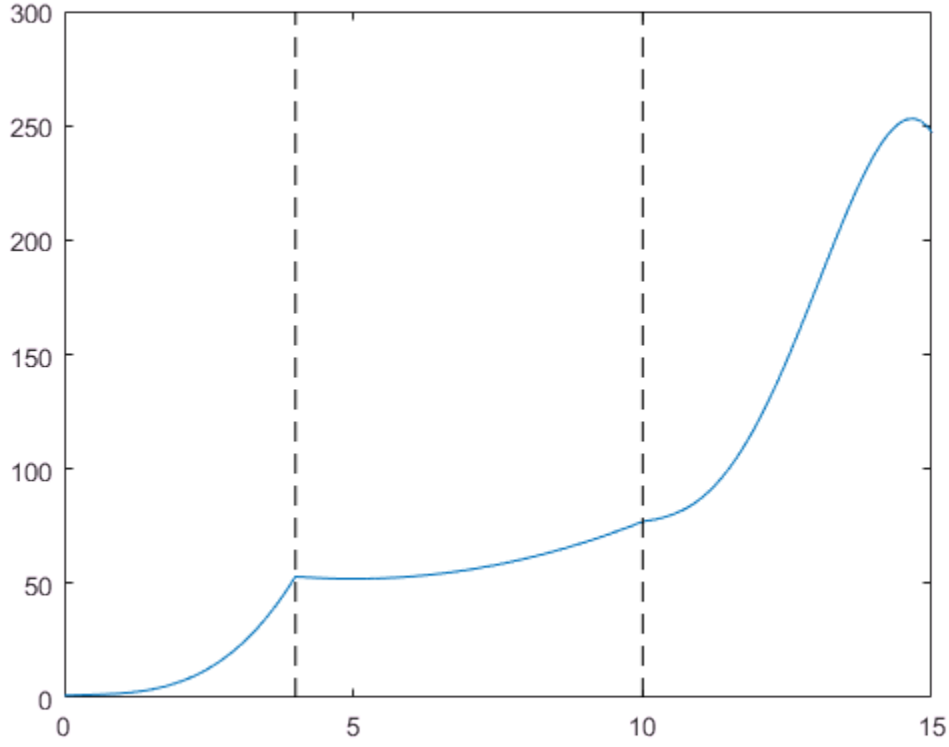

Construct and Plot Piecewise Polynomial

Create two quadratic polynomials, evaluate them at several query points, and plot the results. Then create a single piecewise polynomial with four intervals that alternate between the two quadratic polynomials.

The first two plots show a quadratic polynomial and its negation shifted to the intervals [-8,-4] and [-4,0]. The polynomial is

$$1 - \left(\frac{x}{2} - 1\right)^2 = \frac{-x^2}{4} + x.$$

The last plot shows a piecewise polynomial constructed by alternating these two quadratic pieces over four intervals. It also shows its first derivative, which was constructed after breaking the piecewise polynomial apart using `unmkpp`.

```
subplot(2,2,1)
cc = [-1/4 1 0];
pp1 = mkpp([-8 -4],cc);
xx1 = -8:0.1:-4;
plot(xx1,ppval(pp1,xx1),'k-')

subplot(2,2,2)
pp2 = mkpp([-4 0],-cc);
xx2 = -4:0.1:0;
plot(xx2,ppval(pp2,xx2),'k-')

subplot(2,1,2)
pp = mkpp([-8 -4 0 4 8],[cc;-cc;cc;-cc]);
xx = -8:0.1:8;
plot(xx,ppval(pp,xx),'k-')
[breaks,coefs,l,k,d] = unmkpp(pp);
dpp = mkpp(breaks,repmat(k-1:-1:1,d*l,1).*coefs(:,1:k-1),d);
hold on
plot(xx,ppval(dpp,xx),'r-')
hold off
```

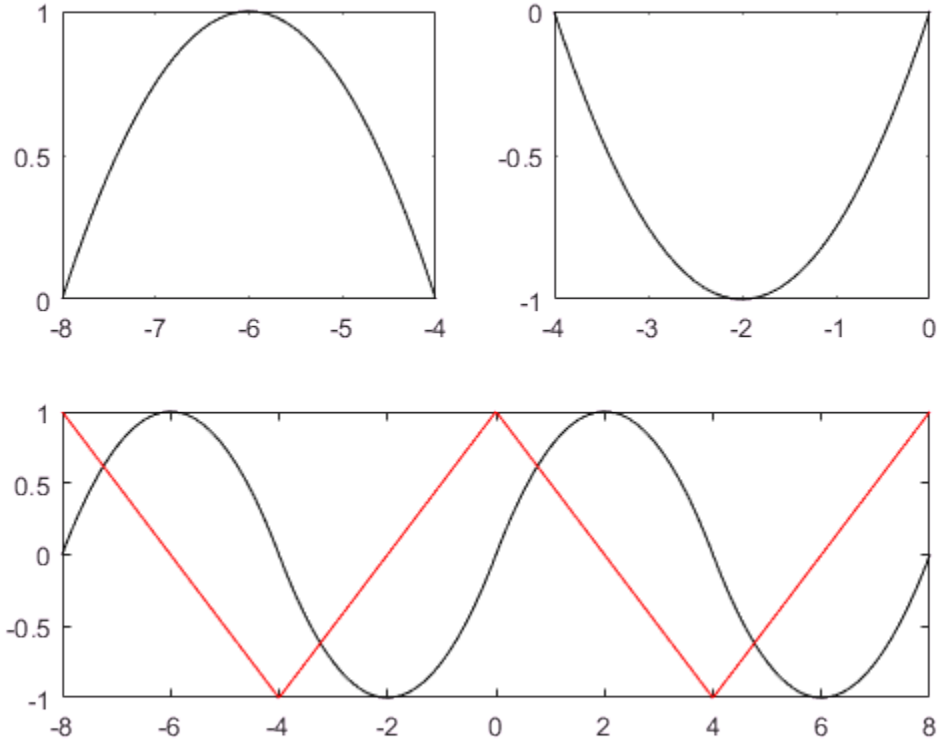

Input Arguments

pp — Piecewise polynomial

structure

Piecewise polynomial, specified as a structure. You can create `pp` using `spline`, `pchip`, or the spline utility function `mkpp`.

xq — Query points

vector | array

Query points, specified as a vector or array. `xq` specifies the points where `ppval` evaluates the piecewise polynomial.

Data Types: `single` | `double`

Output Arguments

v — Piecewise polynomial values at query points

vector | matrix | array

Piecewise polynomial values at query points, returned as a vector, matrix, or array.

If `pp` has `[d1,..,dr]`-valued coefficients (nonscalar coefficient values), then:

- When `xq` is a vector of length `N`, `v` has size `[d1,...,dr,N]`, and `v(:,...,:,j)` is the value at `xq(j)`.
- When `xq` has size `[N1,...,Ns]`, `v` has size `[d1,...,dr,N1,...,Ns]`, and `v(:,...,:, j1,...,js)` is the value at `xq(j1,...,js)`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

The size of output `v` does not match MATLAB when both of the following statements are true:

- The input `x` is a variable-size array that is not a variable-length vector.
- `x` becomes a row vector at run time.

The code generator does not remove the singleton dimensions. However, MATLAB might remove singleton dimensions.

For example, suppose that `x` is a :4-by-:5 array (the first dimension is variable size with an upper bound of 4 and the second dimension is variable size with an upper bound of

5). Suppose that `ppval(pp,0)` returns a 2-by-3 fixed-size array. `v` has size 2-by-3-by-:4-by-:5. At run time, suppose that, size(x,1) =1 and size (x,2) = 5. In the generated code, the size(v) is [2,3,1,5]. In MATLAB, the size is [2,3,5].

See Also

See Also

`mkpp` | `pchip` | `spline` | `unmkpp`

Introduced before R2006a

prefdir

Folder containing preferences, history, and layout files

Syntax

```
prefdir
folder = prefdir
folder = prefdir(1)
```

Description

`prefdir` returns the folder that contains

- Preferences for MATLAB and related products (`matlab.prf`)
- Command history file (`History.xml`)
- MATLAB shortcuts (`shortcuts_2.xml`)
- MATLAB desktop layout files (`MATLABDesktop.xml` and `Your_Saved_LayoutMATLABLayout.xml`)
- Other related files

`folder = prefdir` assigns to `folder` the name of the folder containing preferences and related files.

`folder = prefdir(1)` creates a folder for preferences and related files if one does not exist. If the folder does exist, the name is assigned to `folder`.

Examples

View the location of the preferences folder:

```
prefdir
```

Make the preferences folder become the current folder:

```
cd(prefdir)
```

```
% Then, view the files for customizing MathWorks products:
dir
```

On Windows platforms, go directly to the preferences folder in Microsoft Windows Explorer

```
winopen(prefdir)
```

Tips

- You must have write access to the preferences folder. Otherwise, MATLAB generates an error in the Command Window when you try to change preferences. This can happen if the folder is hidden, for example: `myname/.matlab/R2009a`.

See Also

`preferences` | `getpref` | `setpref`

Topics

"Preferences MATLAB Uses When Multiple Releases Are Installed"

Introduced before R2006a

preferences

Open Preferences dialog box

Syntax

```
preferences
```

Description

`preferences` displays the Preferences dialog box, from which you can make changes to options for MATLAB and related products.

See Also

`prefdir`

Topics

"Preferences"

Introduced before R2006a

primes

Prime numbers less than or equal to input value

Syntax

```
p = primes(n)
```

Description

`p = primes(n)` returns a row vector containing all the prime numbers less than or equal to `n`. The data type of `p` is the same as that of `n`.

Examples

Primes Less Than or Equal to 25

```
p = primes(25)
```

```
p =

     2     3     5     7    11    13    17    19    23
```

Primes Less Than or Equal to an Unsigned Integer

```
n = uint16(12);
p = primes(n)
```

```
p = 1×5 uint16 row vector

    2    3    5    7   11
```

Input Arguments

n — Input value
scalar, real integer value

Input value, specified as a scalar that is a real integer value.

Example: `10`

Example: `int16(32)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The maximum double precision input is `2^32`.
- The maximum single precision input is `2^24`.
- The input `n` cannot have type `int64` or `uint64`.

See Also

See Also
`factor` | `isprime`

Introduced before R2006a

print

Print figure or save to specific file format

Syntax

```
print(filename,formattype)
print(filename,formattype,formatoptions)
```

```
print
print(printer)
print(driver)
print(printer,driver)
```

```
print('-clipboard',clipboardformat)
```

```
print(resize, ___ )
print(resolution, ___ )
print(renderer, ___ )
print('-noui', ___ )
print(fig, ___ )
```

```
cdata = print('-RGBImage');
```

Description

`print(filename,formattype)` saves the current figure to a file using the specified file format, such as `print('BarPlot','-dpng')`. If the file name does not include an extension, then `print` appends the appropriate one.

`print(filename,formattype,formatoptions)` specifies additional options that are available for some formats.

`print` prints the current figure to the default printer.

`print(printer)` specifies the printer. Specify the printer as a character vector containing the printer name preceded by `-P`, for example, `'-Pmy printer'`. The printer must be set up on your system.

`print(driver)` specifies the driver. Use this option if you want to ensure that the printed output is either black and white or color.

`print(printer,driver)` specifies the printer and the driver.

`print('-clipboard',clipboardformat)` copies the current figure to the clipboard using the format specified by `clipboardformat`. You can paste the copied figure into other applications.

`print(resize, ___ )` maximizes the figure size to fill the page. Specify `resize` as `'-bestfit'` to preserve the figure's aspect ratio or `'-fillpage'` to ignore the aspect ratio. These options are valid only when saving to a page format (PDF, and PS) or printing to a printer.

`print(resolution, ___ )` uses the specified resolution. Specify the resolution as a character vector containing an integer value preceded by `-r`, for example, `'-r200'`. Use this option with any of the input arguments from the previous syntaxes.

`print(renderer, ___ )` uses the specified renderer. Specify the renderer as either `'-painters'` or `'-opengl'`.

`print('-noui', ___ )` excludes user interface controls, such as push buttons and sliders, from the saved or printed output. It does not exclude user interface objects that can contain an axes, such as a uitab or uipanel.

`print(fig, ___ )` saves or prints the figure or Simulink block diagram specified by `fig`.

`cdata = print('-RGBImage');` returns the RGB image data for the current figure. This option differs from screen captures in that all printing features apply to the output. You can also specify the `resolution`, `renderer`, `'-noui'`, and `fig` options with this syntax. However, you cannot specify a Simulink block diagram.

Examples

Print Paper Copy of Figure

Create a bar chart and print it to your system default printer. If you do not specify the figure to print, then `print` uses the current figure.

```
bar(1:10)
```

print

Copy Figure to Clipboard

Create a plot and copy it to the system clipboard.

```
plot(1:10)
print('-clipboard','-dmeta')
```

You can paste the copied plot into other applications.

Save Figure as Image File

Create a plot and save it as a PNG image file.

```
bar(1:10)
print('BarPlot','-dpng')
```

`print` saves the plot as `BarPlot.png`.

Save Figure as Vector Graphics File

Create a plot and save it as an Encapsulated PostScript file.

```
bar(1:10)
print('BarPlot','-depsc')
```

`print` saves the plot as `BarPlot.eps`.

Add TIFF Preview to EPS File

Save the current figure as an Encapsulated PostScript File and add a TIFF preview.

```
surf(peaks)
print('SurfacePlot','-depsc','-tiff')
```

Specify Figure to Save

Save a specific figure by passing its object variable to `print`.

```
fig = figure;
plot(1:10)
print(fig,'MySavedPlot','-dpng')
```

Alternatively, refer to a figure using the value of its `Number` property, which is the integer value that displays in the figure window title bar. For example, save the figure with `Figure 2` displayed in the title bar. Precede the integer value by `-f`.

```
figure(2);
plot(1:10)
print('-f2','MySavedPlot','-dpng')
```

Save Figure at Screen Size and Resolution

Save a surface plot to a PNG file. Set the `PaperPositionMode` property for the figure to `'auto'` so that it saves at the size displayed on the screen. Use `'-r0'` to save it with screen resolution.

```
surf(peaks)
set(gcf,'PaperPositionMode','auto')
print('PeaksSurface','-dpng','-r0')
```

Save Figure that Fills Page

Save a figure that fills the page using the `'-fillpage'` option.

```
bar([1 10 7 8 2 2 9 3 6])
print('FillPageFigure','-dpdf','-fillpage')
```

Save Figure Without Saving UIControls

Create a figure with a push button that clears the axes. Save the figure to a JPEG file without saving the push button.

```
surf(peaks)
uicontrol('Style','pushbutton','String','Clear',...
    'Position',[20 20 50 20],'Callback','cla');
print('SurfacePlot','-djpeg','-noui')
```

Return RGB Image Data for Figure

Return the RGB image data for a figure.

```
surf(peaks)
cdata = print('-RGBImage');
```

Display the image data at full resolution using `imshow`.

```
figure
```

```
imshow(cdata)
```

Input Arguments

`filename` — File name
character vector

File name, specified as a character vector containing the desired file name and path.

Example: `'My Saved Chart'`

Example: `'Folder\My Saved Chart'`

The maximum file name length, including the path, is operating system and file format specific. Typically, the file name should be no more than 126 characters, or if you include the path, then no more than 128 characters.

`formattype` — File format
`'-djpeg'` | `'-dpng'` | `'-dtiff'` | `'-dpdf'` | `'-deps'` | `...`

File format, specified as one of the options in these tables.

Bitmap Image File

Bitmap images contain a pixel-based representation of the figure. The size of the generated file depends on the figure, the format, and your system resolution. Bitmap images are widely used by Web browsers and other applications that display graphics. However, they do not scale well and you cannot modify individual graphics objects, such as lines and text, in other graphics applications.

This table lists the supported bitmap image formats.

Option	Bitmap Image Format	Corresponding File Extension
`'-djpeg'`	JPEG 24-bit	`.jpg`
`'-dpng'`	PNG 24-bit	`.png`
`'-dtiff'`	TIFF 24-bit (compressed)	`.tif`
`'-dtiffn'`	TIFF 24-bit (not compressed)	`.tif`

Option	Bitmap Image Format	Corresponding File Extension
`'-dmeta'`	Enhanced metafile (Windows only)	`.emf`
`'-dbmpmono'`	BMP Monochrome	`.bmp`
`'-dbmp'`	BMP 24-bit	`.bmp`
`'-dbmp16m'`	BMP 24-bit	`.bmp`
`'-dbmp256'`	BMP 8-bit (256 color, uses a fixed colormap)	`.bmp`
`'-dhdf'`	HDF 24-bit	`.hdf`
`'-dpbm'`	PBM (plain format) 1-bit	`.pbm`
`'-dpbmraw'`	PBM (raw format) 1-bit	`.pbm`
`'-dpcxmono'`	PCX 1-bit	`.pcx`
`'-dpcx24b'`	PCX 24-bit color (three 8-bit planes)	`.pcx`
`'-dpcx256'`	PCX 8-bit newer color (256 color)	`.pcx`
`'-dpcx16'`	PCX older color (EGA/VGA 16-color)	`.pcx`
`'-dpgm'`	PGM (plain format)	`.pgm`
`'-dpgmraw'`	PGM (raw format)	`.pgm`
`'-dppm'`	PPM (plain format)	`.ppm`
`'-dppmraw'`	PPM (raw format)	`.ppm`

Vector Graphics File

Vector graphics files store commands that redraw the figure. This type of format scales well, but can result in a large file. Also, it might not produce the correct 3-D arrangement of objects in certain cases. Some applications support extensive editing of vector graphics formats. However, some applications do not support editing beyond resizing the graphic. In general, try to make all the necessary changes while your figure is still in MATLAB.

If you set the `Renderer` property for the figure, then `print` uses that renderer when generating output. Otherwise, `print` chooses the appropriate renderer. Typically, `print`

uses the Painters renderer when generating vector graphics files. For some complex figures, `print` uses the OpenGL renderer instead. If it uses the OpenGL renderer, then the vector graphics file contains an embedded image, which might limit the extent to which you can edit the image in other applications. To ensure that `print` uses the Painters renderer, set the `Renderer` property for the figure to `'painters'` or specify `'-painters'` as an input argument to `print`.

Note: The default figure renderer is OpenGL. If the figure renderer differs from the renderer used when generating output, some details of the saved figure can differ from the figure on the display. If necessary, you can make the displayed figure and the saved figure use the same renderer. Set the `Renderer` property for the figure or specify the `renderer` input argument to the `print` function.

This table lists the supported vector graphics formats.

Option	Vector Graphics Format	Corresponding File Extension
`'-dpdf'`	Full page Portable Document Format (PDF) color	`.pdf`
`'-deps'`	Encapsulated PostScript (EPS) Level 3 black and white	`.eps`
`'-depsc'`	Encapsulated PostScript (EPS) Level 3 color	`.eps`
`'-deps2'`	Encapsulated PostScript (EPS) Level 2 black and white	`.eps`
`'-depsc2'`	Encapsulated PostScript (EPS) Level 2 color	`.eps`
`'-dmeta'`	Enhanced Metafile (Windows only)	`.emf`
`'-dsvg'`	SVG (Scalable Vector Graphics)	`.svg`
`'-dps'`	Full-page PostScript (PS) Level 3 black and white	`.ps`

Option	Vector Graphics Format	Corresponding File Extension
`'-dpsc'`	Full-page PostScript (PS) Level 3 color	`.ps`
`'-dps2'`	Full-page PostScript (PS) Level 2 black and white	`.ps`
`'-dpsc2'`	Full-page PostScript (PS) Level 2 color	`.ps`

You cannot save Simulink block diagrams in PostScript or EPS formats.

Note: Only PDF and PS formats use the `PaperOrientation` property of the figure and the `left` and `bottom` elements of the `PaperPosition` property. Other formats ignore these values.

`formatoptions` — Additional formatting options

`'-tiff' | '-loose' | '-cmyk' | '-append'`

Additional formatting options supported by some file formats, specified as one or more of these values:

- `'-tiff'` — Include a TIFF preview. EPS files only.
- `'-loose'` — Use a loose bounding box. EPS and PS files only.
- `'-cmyk'` — Use CMYK colors instead of RGB colors. EPS and PS files only.
- `'-append'` — Append the figure to an existing PS file. PS files only.

Example: `print('my file','-deps','-tiff','-loose')` saves the current figure to the file `my file.eps` using a loose bounding box and includes a TIFF preview.

`printer` — Printer name

character vector containing `-P` and printer name

Printer name, specified as a character vector containing `-P` and printer name.

Example: `'-Pmy local printer'`

To view a list of available printers, use this command:

```
[~,printers] = findprinters
```

If you do not specify a printer, then `print` uses the system default printer. If you want to set up a new printer or select a different default printer, use the operating system printer management utilities. Restart MATLAB if you do not see a printer that is set up already.

`driver` — Printer driver

`'-dwin' | '-dwinc' | '-dprn' | '-dprnc'`

Printer driver, specified as `'-dwin'`, `'-dwinc'`, `'-dprn'`, or `'-dprnc'`. If you do not specify a driver, then `print` uses the driver returned from the `printopt` function.

The option you use depends on your system, for example:

System	Driver	Output
Windows	`'-dwin'`	Black and white
	`'-dwinc'`	Color
Linux or Mac	`'-dprn'`	Black and white
	`'-dprnc'`	Color

`clipboardformat` — Format copied to clipboard

`-dmeta | -dbitmap | -dpdf`

Format copied to clipboard, specified as one of these options:

- `'-dmeta'` — Enhanced metafile (Windows only)
- `'-dbitmap'` — Bitmap image (Windows and Mac OS X)
- `'-dpdf'` — PDF file (Windows and Mac OS X)

`resize` — Option to expand figure to fill page

`'-fillpage' | '-bestfit'`

Option to expand figure to fill page, specified as one of these values:

- `'-fillpage'` — Maximize the size of the figure to fill the page. Leave a .25 inch margin on all sides of the page. The tick marks, layout, and aspect ratio of the figure might change.
- `'-bestfit'` — Maximize the size of the figure to fill the page, but preserve the aspect ratio of the figure. The figure might not fill the entire page. This option leaves a minimum page margin of .25 inches.

Both options are valid only when printing a figure to a printer or saving to a page format such as PDF and PS. They are not valid for Simulink block diagrams.

`resolution` — Resolution

character vector containing `-r` and integer

Resolution, specified as a character vector containing `-r` and an integer value indicating the resolution in dots per inch. For example, `'-r300'` sets the output resolution to 300 dots per inch. To specify screen resolution, use `'-r0'`.

In general, using a higher resolution value yields higher-quality output, but at the cost of higher memory use and larger output files. The higher the resolution setting, the longer it takes to render your figure. By default, the resolution is 90 DPI for Simulink models and 150 DPI for figures. For typical laser-printer output, the default resolution of 150 DPI for figures is normally adequate. However, if you are preparing figures for high-quality printing, such as a textbook or color brochures, you might want to use 200 DPI or 300 DPI. The resolution can be limited by the printer's capabilities.

Specifying the resolution is useful when creating a bitmap image or when using the OpenGL renderer with a vector graphics file format (since OpenGL produces a bitmap image even with vector formats). Specifying the resolution has no effect when using the Painters renderer with a vector graphics file format, since Painters produces a true vector graphics file that contains the commands that redraw the figure.

`renderer` — Graphics renderer

`'-opengl'` | `'-painters'`

Graphics renderer, specified as `'-opengl'` or `'-painters'`.

- `'-opengl'` — OpenGL renderer. Use this renderer when saving bitmap images. OpenGL produces a bitmap image even with vector formats, which might limit the extent to which you can edit the image in other applications.
- `'-painters'` — Painters renderer. Use this renderer when saving vector graphics files. If you save to a vector graphics file and if the figure RendererMode property is set to `'auto'`, then `print` automatically attempts to use the Painters renderer. If you want to ensure that your output format is a true vector graphics file, then specify the Painters renderer. For example:

  ```
  print('-painters','-deps','myVectorFile')
  ```

Note: Sometimes, saving a file with the `'-painters'` option can cause longer rendering times and, in rare cases, might not accurately arrange graphics objects in 3-D views. Also, the Painters renderer cannot print or save lines thinner than one pixel.

If you do not specify the renderer, then `print` automatically uses the appropriate renderer to produce the output format requested. However, if you set the `Renderer` property for the figure, then `print` uses that renderer when generating output.

`fig` — Figure, Simulink block diagram

figure object | Simulink block diagram

Figure object or Simulink block diagram. You can refer to a figure using either its object variable name or using the figure number preceded by `-f`. For example, `-f2` refers to the figure with a `Number` property value of `2`. When specifying a Simulink block diagram, precede the model name with `-s`. Specify the current model using `'-s'`.

You cannot save Simulink block diagrams in PostScript or EPS formats.

Output Arguments

`cdata` — Image data

n-by-m-by-3 array

Image data, returned as an n-by-m-by-3 array. The size of the image data array depends on the PaperPosition property of the figure and the output resolution.

Note: Starting in R2015b, if you use `print` with the `'-r0'` option on a high-resolution system, then the size of the `cdata` output array is larger than in previous releases or on other systems. Also, the number of elements in `cdata` might not match the size of the figure in pixels based on the figure's `PaperPosition` property and the root's `ScreenPixelsPerInch` property. For more information, see "DPI-Aware Behavior in MATLAB".

Limitations

- `print` does not support capturing ActiveX controls.
- Starting MATLAB in no display mode on Linux or using the `-noFigureWindows` startup option on any platform has these limitations for `print`:
  - Printing or saving figures with visible uicontrols errors. To print or save the figure, hide the uicontrols by setting their `Visible` properties to `'off'`, or use the `'-noui'` option with the `print` function.

- Always uses the painters renderer, even if you specify the `'-opengl'` option.

Definitions

Compatibility Considerations

Starting in R2016a, printed and saved figures match the size of the figure on the screen by default. Previously, printed and saved figures were 8-by-6 inches by default.

Tips

- You can set properties of the figure to control some printing and saving parameters. This table lists properties of the figure related to printing and saving.

Figure Property	Description
PaperPosition	Size of the printed or saved figure. If printing to a printer or a full-page output format, then this property also determines the figure location on the page.
PaperPositionMode	Specifies whether to use the `PaperPosition` property or the size of the figure on the screen to set the size of the printed or saved figure.
InvertHardcopy	Specifies whether to use the current background color of the figure or to change the background color to white when printing or saving the figure.
PaperOrientation	Figure orientation on printed page.
PaperType	Standard printer paper size.
PaperSize	Custom width and height of printer paper.
PaperUnits	Units for the `PaperSize` and `PaperPosition` properties.

- If you are using a Linux or Mac system and get an error about an invalid or unrecognized printer, then try specifying a PostScript driver for the `driver` option. If the printer supports PostScript level 3, try `'-dps'` for black and white or `'-dspc'` for color. If the printer supports PostScript level 2, then try `'-dps2'` for black and white or `'-dsp2c'` for color. For example:

  ```
  print('-dpsc','-Pmy printer')
  ```

  To use this driver as the default driver, edit the `printopt` file. Alternatively, print the figure to a PDF file. Then, print the PDF from an external PDF viewer.
- If you print a figure that has a callback defined for the `SizeChangedFcn` property and if the output size differs from the size of the figure on the screen, then the `print` function displays a warning message. To avoid the warning message, set the `PaperPositionMode` property for the figure to `'auto'`.

See Also

See Also

`getframe` | `saveas` | `savefig`

Introduced before R2006a

printopt

Configure printer defaults

Syntax

```
[pcmd,dev] = printopt
```

Description

`[pcmd,dev] = printopt` returns the current system-dependent printing command and output device. `printopt` is a file used by `print` to produce the printed output. You can edit the file `printopt.m` to set your default printer type and destination.

- `pcmd` contains the command that `print` uses to send a file to the printer when not using the printer drivers directly.
- `dev` contains the printer driver or graphics format option for the `print` command.

The defaults for `pcmd` and `dev` are platform-dependent. This table lists the default values for each platform.

Platform	Print Command	Driver or Format
Mac and Linux	`lpr -r`	`-dprn` In R2014a and earlier, the driver was `-dps2`.
Windows	COPY /B %s LPT1:	`-dwin`

See Also

`printdlg` | `print`

Introduced before R2006a

printdlg

Open figure Print dialog box

Note: The `-crossplatform` and `-setup` input arguments have been removed in R2014b. They no longer have any effect.

Syntax

```
printdlg
printdlg(fig)
```

Description

`printdlg` prints the current figure.

`printdlg(fig)` creates a modal dialog box from which you can print the figure window identified by the handle `fig`. Uimenus do not print.

Tips

If you want to set up a new printer, use the operating system printer management utilities. Restart MATLAB if you do not see the printer which is already setup.

See Also

`print` | `printopt` | `printpreview`

Introduced before R2006a

printpreview

Open figure Print Preview dialog box

Syntax

```
printpreview
printpreview(f)
```

Description

`printpreview` displays a dialog box showing the figure in the currently active figure window as it will print. A scaled version of the figure displays in the right-hand pane of the dialog box.

`printpreview(f)` displays a dialog box showing the figure having the handle `f` as it will print.

Use the Print Preview dialog box, shown below, to control the layout and appearance of figures before sending them to a printer or print file. Controls are grouped into four tabbed panes: **Layout**, **Lines/Text**, **Color**, and **Advanced**.

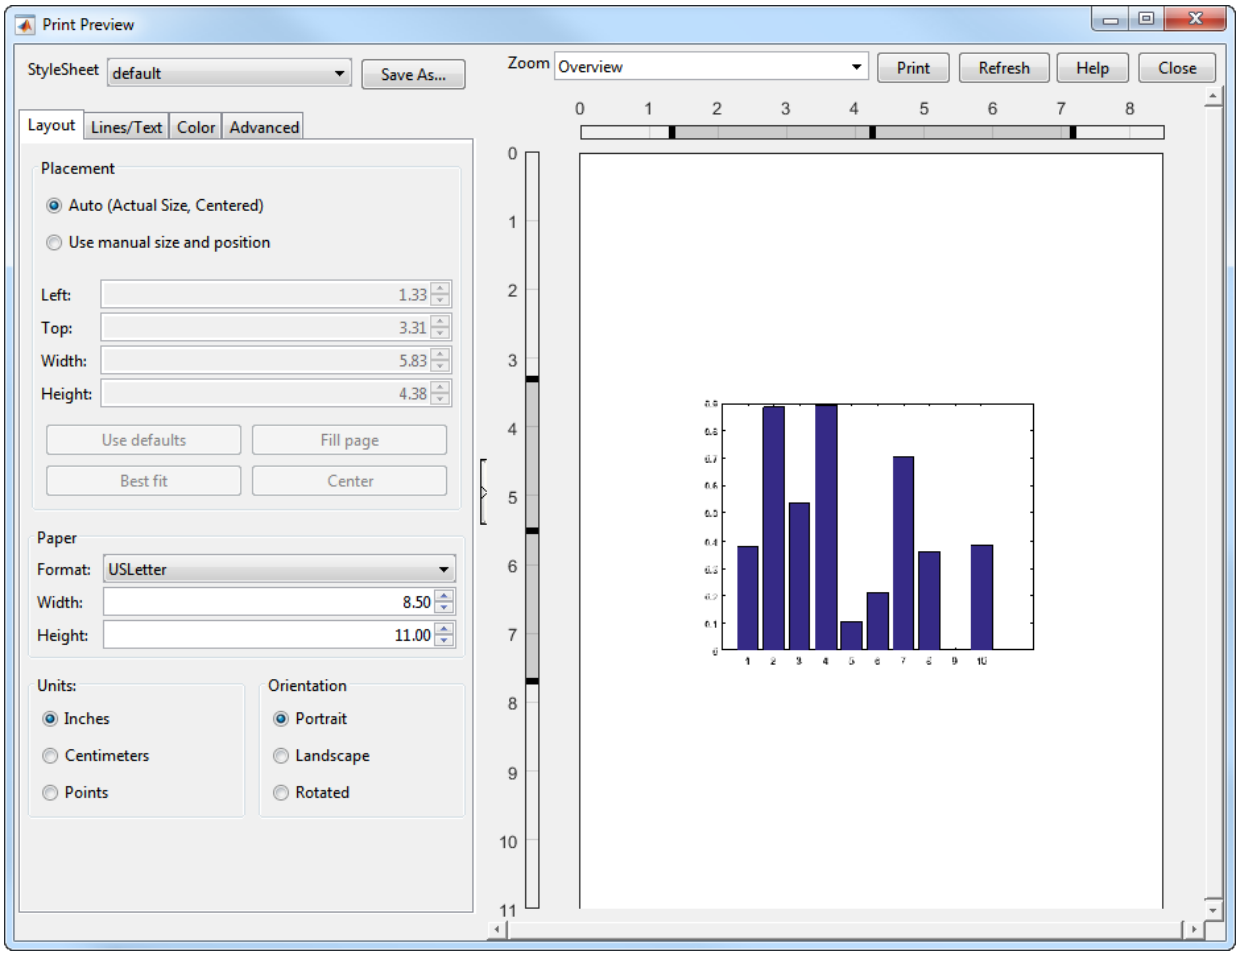

Right Pane Controls

You can position and scale plots on the printed page using the rulers in the right-hand pane of the Print Preview dialog. Use the outer ruler handlebars to change margins. Moving them changes plot proportions. Use the center ruler handlebars to change the position of the plot on the page. Plot proportions do not change, but you can move portions of the plot off the paper. The buttons on that pane let you refresh the plot, close the dialog (preserving all current settings), print the page immediately, or obtain context-

sensitive help. Use the **Zoom** box and scroll bars to view and position page elements more precisely.

The Layout Tab

Use the **Layout** tab, shown above, to control the paper format and placement of the plot on printed pages. The following table summarizes the **Layout** options:

Group	Option	Description
Placement	**Auto**	Let MATLAB decide placement of plot on page*
	Use manual...	Specify position parameters for plot on page*
	Top, Left, Width, Height	Standard position parameters in current units
	Use defaults	Revert to default position
	Fill page	Expand figure to fill printable area
	Best fit	Expand figure to fill printable area, center the figure, and preserve the figure's aspect ratio
	Center	Center plot on printed page
Paper	**Format**	U.S. and ISO sheet size selector
	Width, Height	Sheet size in current units
Units	**Inches**	Use inches as units for dimensions and positions
	Centimeters	Use centimeters as units for dimensions and positions
	Points	Use points as units for dimensions and positions
Orientation	**Portrait**	Upright paper orientation
	Landscape	Sideways paper orientation
	Rotated	Currently the same as **Landscape**

* Selecting **Auto** in the Placement group sets the figure `PaperPositionMode` to `'auto'` and disables the controls in that panel. Selecting **Use manual size and position**

sets the figure `PaperPositionMode` to `'manual'` and enables the controls. If you set `PaperPositionMode` programmatically, the print preview Placement controls respond accordingly.

The Lines/Text Tab

Use the **Lines/Text** tab, shown below, to control the line weights, font characteristics, and headers for printed pages. The following table summarizes the **Lines/Text** options:

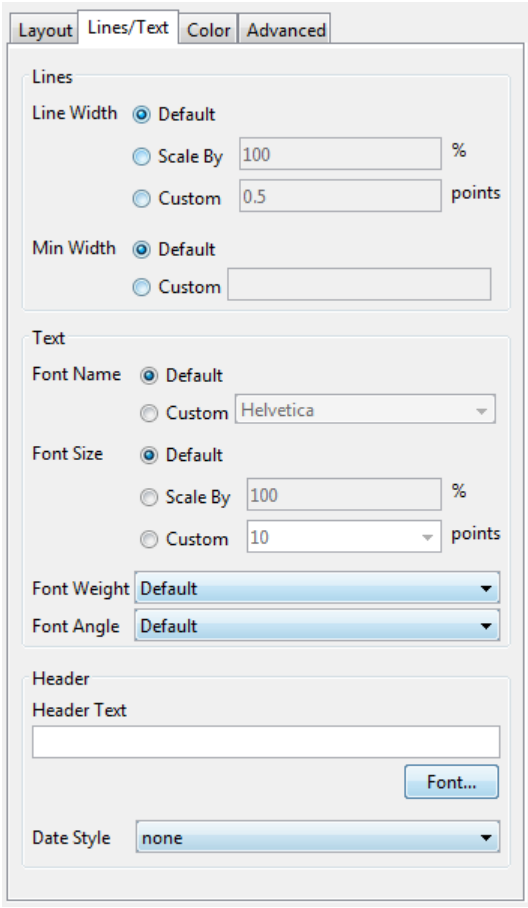

Group	Option	Description
Lines	**Line Width**	Scale all lines by a percentage from 0 upward (100 being no change), print lines at a specified point size, or default line widths used on the plot
	Min Width	Smallest line width (in points) to use when printing; defaults to 0.5 point
Text	**Font Name**	Select a system font for all text on plot, or default to fonts currently used on the plot
	Font Size	Scale all text by a percentage from 0 upward (100 being no change), print text at a specified point size, or default to this used on the plot
	Font Weight	Select `Normal` ... `Bold` font styling for all text from drop-down menu or default to the font weights used on the plot
	Font Angle	Select `Normal`, `Italic` or `Oblique` font styling for all text from drop-down menu or default to the font angles used on the plot
Header	**Header Text**	Type the text to appear on the header at the upper left of printed pages, or leave blank for no header
	Date Style	Select a date format to have today's date appear at the upper left of printed pages, or `none` for no date

The Color Tab

Use the **Color** tab, shown below, to control how colors are printed for lines and backgrounds. The following table summarizes the **Color** options:

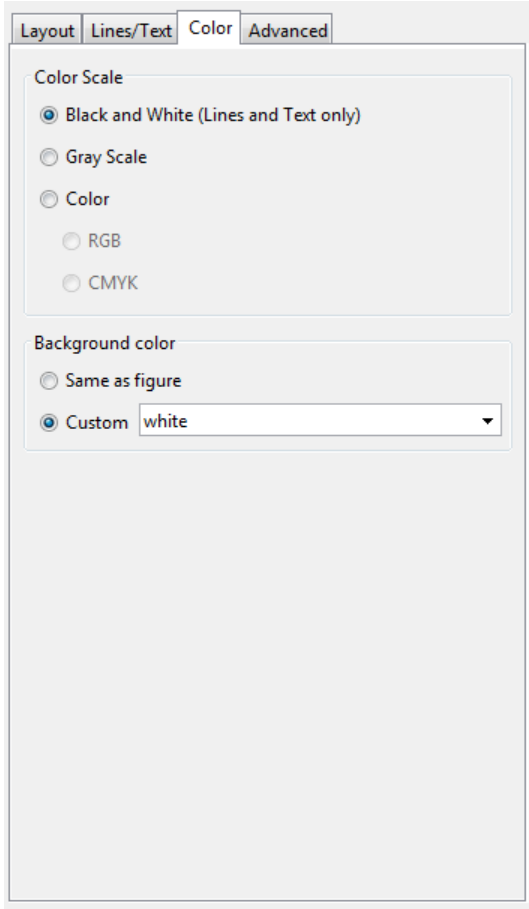

Group	Option	Description
Color Scale	**Black and White**	Select to print lines and text in black and white, but use color for patches and other objects
	Gray Scale	Convert colors to shades of gray on printed pages
	Color	Print everything in color, matching colors on plot; select `RGB` (default) or `CMYK` color model for printing

Group	Option	Description
Background Color	**Same as figure**	Print the figure's background color as it is
	Custom	Select a color name, or type a colorspec for the background; `white` (default) implies no background color, even on colored paper.

The Advanced Tab

Use the **Advanced** tab, shown below, to control finer details of printing, such as limits and ticks, renderer, resolution, and the printing of UIControls. The following table summarizes the **Advanced** options:

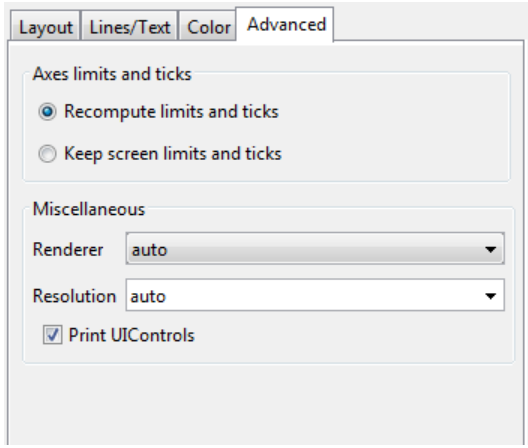

Group	Option	Description
Axes limits and ticks	**Recompute limits and ticks**	Redraw *x*- and *y*-axes ticks and limits based on printed plot size (default)
	Keep screen limits and ticks	Use the *x*- and *y*-axes ticks and limits shown on the plot when printing the previewed figure
Miscellaneous	**Renderer**	Select a rendering algorithm for printing: `painters`, `opengl`, or `auto` (default)

Group	Option	Description
	Resolution	Select resolution to print at in dots per inch: `150`, `300`, `600`, or `auto` (default), or type in any other positive value
	Print UIControls	Print all visible UIControls in the figure (default), or uncheck to exclude them from being printed

Alternatives

Use **File** > **Print Preview** on the figure window menu to access the Print Preview dialog box, described below. For details, see "Print Figure from File Menu".

See Also

`print`

Topics

"Print Figure from File Menu"

Introduced before R2006a

prism

Prism colormap array

Syntax

```
c = prism
c = prism(m)
```

Description

`c = prism` returns the prism colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme is a repeated sequence of the rainbow colors.

`c = prism(m)` returns the colormap with `m` colors.

Examples

Downsample the Prism Colormap

Create a scatter plot with the default colors.

```
x = [3.5 3.3 5 6.1 4 2];
y = [14 5.7 12 6 8 9];
sz = 100*[6 100 20 3 15 20];
c = [1 2 3 4 5 6];
scatter(x,y,sz,c,'filled','MarkerEdgeColor','k','MarkerFaceAlpha',.5);
xlim([1 7]);
ylim([1 16]);
```

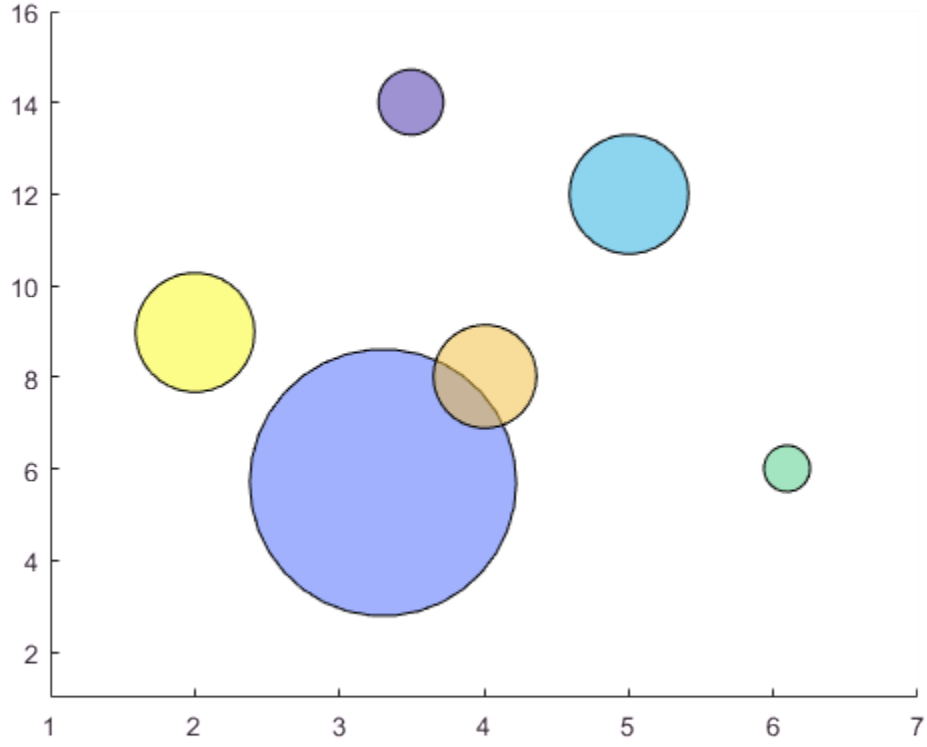

Get the prism colormap array with six entries. Then replace the colormap in the scatter plot.

```
c = prism(6);
colormap(c);
```

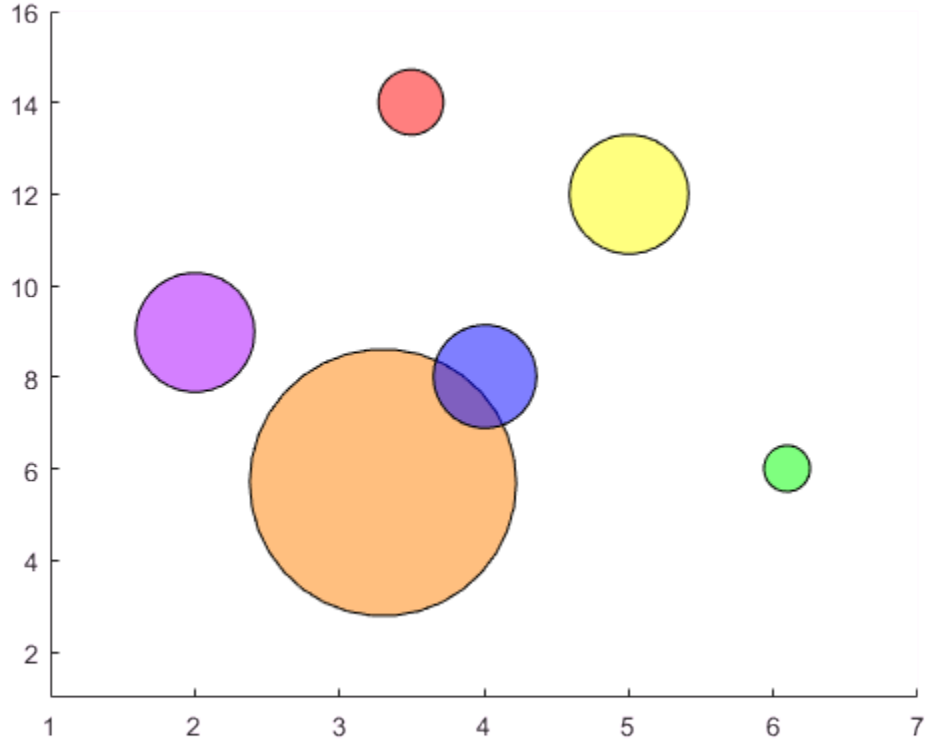

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

prod

Product of array elements

Syntax

```
B = prod(A)
B = prod(A,dim)
B = prod( ___ ,type)
B = prod( ___ ,nanflag)
```

Description

`B = prod(A)` returns the product of the array elements of `A`.

- If `A` is a vector, then `prod(A)` returns the product of the elements.
- If `A` is a nonempty matrix, then `prod(A)` treats the columns of `A` as vectors and returns a row vector of the products of each column.
- If `A` is an empty 0-by-0 matrix, `prod(A)` returns `1`.
- If `A` is a multidimensional array, then `prod(A)` acts along the first nonsingleton dimension and returns an array of products. The size of this dimension reduces to `1` while the sizes of all other dimensions remain the same.

`prod` computes and returns `B` as `single` when the input, `A`, is `single`. For all other numeric and logical data types, `prod` computes and returns `B` as `double`.

`B = prod(A,dim)` returns the products along dimension `dim`. For example, if `A` is a matrix, `prod(A,2)` is a column vector containing the products of each row.

`B = prod( ___ ,type)` returns an array in the class specified by `type`, using any of the input arguments in the previous syntaxes. `type` can be `'double'`, `'native'`, or `'default'`.

`B = prod( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `prod(A,'includenan')` includes `NaN` values in the calculation while `prod(A,'omitnan')` ignores them.

Examples

Product of Elements in Each Column

Create a 3-by-3 array whose elements correspond to their linear indices.

```
A=[1:3:7;2:3:8;3:3:9]
```

```
A =

     1     4     7
     2     5     8
     3     6     9
```

Find the product of the elements in each column. The length of the first dimension is 1, and the length of the second dimension matches `size(A,2)`.

```
B = prod(A)
```

```
B =

     6   120   504
```

Product of Logical Input

Create an array of logical values.

```
A = [true false; true true]
```

```
A = 2×2 logical array
   1   0
   1   1
```

Find the product of the elements in each column.

```
B = prod(A)
```

```
B =
```

```
     1     0
```

The output has type `double`.

```
class(B)
```

```
ans =
'double'
```

Product of Elements in Each Row

Create a 3-by-3 array whose elements correspond to their linear indices.

```
A=[1:3:7;2:3:8;3:3:9]
```

```
A =

     1     4     7
     2     5     8
     3     6     9
```

Find the product of the elements in each row and reduce the length of the second dimension to 1. The length of the first dimension matches `size(A,1)`, and the length of the second dimension is 1.

```
dim = 2;
B = prod(A,dim)
```

```
B =

    28
    80
   162
```

Product of Elements in Each Plane

Create a 3-by-3-by-2 array whose elements correspond to their linear indices.

```
A=[1:3:7;2:3:8;3:3:9];
```

```
A(:,:,2)=[10:3:16;11:3:17;12:3:18]
```

```
A =

(:,:,1) =

     1     4     7
     2     5     8
     3     6     9


(:,:,2) =

    10    13    16
    11    14    17
    12    15    18
```

Find the product of each element in the first plane with its corresponding element in the second plane. The length of the first dimension matches `size(A,1)`, the length of the second dimension matches `size(A,2)`, and the length of the third dimension is 1.

```
dim = 3;
B = prod(A,dim)
```

```
B =

    10    52   112
    22    70   136
    36    90   162
```

Single-Precision Input Treated as Double

Create a 3-by-3 array of single-precision values.

```
A = single([1200 1500 1800; 1300 1600 1900; 1400 1700 2000])
```

```
A = 3×3 single matrix

        1200        1500        1800
        1300        1600        1900
        1400        1700        2000
```

Find the product of the elements in each row by multiplying in double precision.

```
B = prod(A,2,'double')
```

```
B =

   1.0e+09 *

    3.2400
    3.9520
    4.7600
```

The output is double precision.

```
class(B)
```

```
ans =
'double'
```

Integer Data Type for Input and Output

Create a 3-by-3 array of 8-bit unsigned integers.

```
A = uint8([1:3:7;2:3:8;3:3:9])
```

```
A = 3×3 uint8 matrix

   1   4   7
   2   5   8
   3   6   9
```

Find the product of the elements in each column natively in `uint8`.

```
B = prod(A,'native')
```

```
B = 1×3 uint8 row vector

     6   120   255
```

The result is an array of 8-bit unsigned integers.

```
class(B)
```

```
ans =
'uint8'
```

Product Excluding NaN

Create a vector and compute its product, excluding NaN values. If you do not specify 'omitnan', then prod(A) returns NaN.

```
A = [1 3 2 4 NaN 3 NaN 2];
P = prod(A,'omitnan')
```

```
P =

   144
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension dim indicates the dimension whose length reduces to 1. The size(B,dim) is 1, while the sizes of all other dimensions remain the same.

Consider a two-dimensional input array, A.

- If `dim = 1`, then `prod(A,1)` returns a row vector containing the product of the elements in each column.

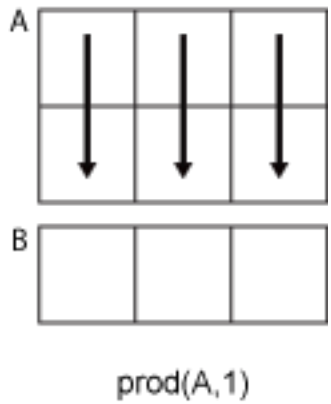

- If `dim = 2`, then `prod(A,2)` returns a column vector containing the product of the elements in each row.

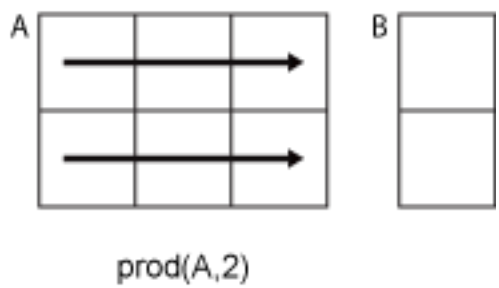

`prod` returns A when `dim` is greater than `ndims(A)`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`type` — Output class

`'default'` (default) | `'double'` | `'native'`

Output class, specified as `'default'`, `'double'`, or `'native'`, and which defines the data type of the output, B.

type	Output data type
'default'	double, unless the input data type is single. In which case, the output data type is single.
'double'	double
'native'	same data type as the input array, A

nanflag — NaN condition
'includenan' (default) | 'omitnan'

NaN condition, specified as one of these values:

- 'includenan' — Include NaN values from the input when computing the product, resulting in NaN output.
- 'omitnan' — Ignore NaN values in the input. If all elements are NaN, then prod returns 1.

Output Arguments

B — Product array
scalar | vector | matrix | multidimensional array

Product array, returned as a scalar, vector, matrix, or multidimensional array.

The class of B is as follows:

- If the type argument specifies 'default' or is not used
  - and the input is not single, then the output is double.
  - and the input is single, then the output is single.
- If the type argument specifies 'double', then the output is double regardless of the input data type.
- If the type argument specifies 'native', then the output is the same data type as the input.

Definitions

First Nonsingleton Dimension

The first nonsingleton dimension is the first dimension of an array whose size is not equal to `1`.

For example:

- If `X` is a 1-by-n row vector, then the second dimension is the first nonsingleton dimension of `X`.
- If `X` is a 1-by-0-by-n empty array, then the second dimension is the first nonsingleton dimension of `X`.
- If `X` is a 1-by-1-by-3 array, then the third dimension is the first nonsingleton dimension of `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you supply `dim`, it must be a constant.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

See Also

`cumprod` | `diff` | `ndims` | `sum`

Introduced before R2006a

profile

Profile execution time for functions

Use the Profiler to track execution time. Knowing the execution time of your MATLAB code helps you to debug and optimize it. For information on the user interface to the Profiler, see Profiling for Improving Performance.

Syntax

```
profile action
profile action option1 ... optionN
profile option1 ... optionN

p = profile('info')

s = profile('status')
```

Description

`profile action` profiles the execution time for functions. Use `action` to start, stop, and restart the Profiler, and view or clear profile statistics. For example, `profile on` starts the Profiler.

`profile action option1 ... optionN` starts or restarts the Profiler with the specified options. For example, `profile resume -history` restarts the Profiler and records the sequence of function calls.

`profile option1 ... optionN` sets the specified Profiler options. If the Profiler is on and you specify one of the options, MATLAB throws an error. To change options, first specify `profile off`, and then specify the new options.

`p = profile('info')` stops the Profiler and displays a structure containing the results. To access the data generated by `profile`, use this syntax.

`s = profile('status')` returns a structure with the Profiler status information.

Examples

Profile Function and Save Results as HTML

Turn on the Profiler, and call the `magic` function.

```
profile on
n = 100;
M = magic(n);
```

View the results in the Profiler window.

```
profile viewer
```

Save the results as HTML. By default, `profsave` saves the files to the `profile_results` subfolder in your current working folder.

```
profsave
```

Profile Function and Display Function Call History

Create the file `myFunction.m` using this main function and local function.

```
function c = myFunction(a,b)
c = sqrt(square(a)+square(b));
end

function y = square(x)
y = x.^2;
end
```

Turn on the Profiler, and enable the function call history option. Profile a call to the `myFunction` function.

```
profile on -history
a = rand(5);
b = rand(5);
c = myFunction(a,b);
```

Save the profile results.

```
p = profile('info')
```

```
p =
```

```
      FunctionTable: [2x1 struct]
    FunctionHistory: [2x6 double]
     ClockPrecision: 3.3475e-07
         ClockSpeed: 3.0600e+09
               Name: 'MATLAB'
           Overhead: 0
```

Display the function call history.

```
p.FunctionHistory
```

```
ans =

     0     0     1     0     1     1
     1     2     2     2     2     1
```

Display function entry and exit information by iterating over the function call history.

```
numEvents = size(p.FunctionHistory,2);
for n = 1:numEvents
    name = p.FunctionTable(p.FunctionHistory(2,n)).FunctionName;

    if p.FunctionHistory(1,n) == 0
        disp(['Entered ' name]);
    else
        disp(['Exited ' name]);
    end
end
```

```
Entered myFunction
Entered myFunction>square
Exited myFunction>square
Entered myFunction>square
Exited myFunction>square
Exited myFunction
```

Set the function call history to the default value.

```
profile -nohistory
```

View Current Profiler Settings

```
s = profile('status')
```

```
s =
```

```
     ProfilerStatus: 'off'
        DetailLevel: 'mmex'
              Timer: 'performance'
    HistoryTracking: 'off'
        HistorySize: 1000000
```

- Profiling for Improving Performance
- "Profiling Parallel Code" (Parallel Computing Toolbox)

Input Arguments

`action` — Control options for Profiler

`on` | `off` | `resume` | `clear` | `viewer` | `info` | `status`

Control options for the Profiler specified as one of these options.

Option	Result
`on`	Start the Profiler, clearing any previously recorded profile statistics.
`off`	Stop the Profiler.
`resume`	Restart the Profiler without clearing previously recorded statistics.
`clear`	Clear the recorded statistics.
`viewer`	Stop the Profiler and display the results in the Profiler window. For more information, see "Profile to Improve Performance".
`info`	Stop the Profiler and return a structure containing the results.
`status`	Return a structure with the Profiler status information.

`option1 ... optionN` — One or more profiling options

character vectors

One or more profiling options, specified as character vectors corresponding to valid settings from the history and clock option tables. You can specify one or more of these options with one of the following syntaxes:

- `profile on option1 ... optionN`
- `profile resume option1 ... optionN`

- `profile option1 ... optionN`

If you change the Profiler settings, the settings persist when you stop the Profiler or clear the statistics. To revert to default Profiler behavior, manually set the options to the default settings or start a new MATLAB session.

History Options

Option	Result
`-history`	Record the exact sequence of function calls, including function entry and exit events. By default, the `-history` option is not enabled.
`-historysize` *`integer`*	Specify the number of function entry and exit events to record. By default, `historysize` is 1,000,000. If the number of function calls exceeds the specified `historysize`, the `profile` function continues to record profiling statistics other than the sequence of calls.
`-nohistory`	Default setting. Disable recording of the exact sequence of function calls. The `profile` function collects all other profiling statistics.

Clock Options

Option	Result
`-timer 'performance'`	Default setting. Use wall-clock time from the clock that the operating system supplies to measure performance.
`-timer 'processor'`	Use the wall-clock time directly from the processor. Sometimes your power savings settings or use of multiple processors influence this measurement.
`-timer 'real'`	Use system time reported by the operating system. This option is the most computationally expensive measurement and has the most impact on the performance of profiled code. Changing the time on the operating system clock influences this measurement.

Option	Result
`-timer 'cpu'`	Use computer time and sums time across all threads. This measurement is different from wall-clock time. For example, the computer time for the `pause` function is typically small, but wall-clock time accounts for the actual time paused, which is larger.

Output Arguments

p — Profiler statistics

structure

Profiler statistics, returned as a structure containing these fields.

Field	Description
`FunctionTab`	Function statistics, returned as a structure array. Each structure in the array contains information about one of the functions or local functions called during profiling. Each structure contains the following fields: • `CompleteName` – Full path to `FunctionName`. • `FunctionName` – Name of function. If the function is a local function, `FunctionName` includes the main function. • `FileName` – Full path to `FunctionName`, with the file extension. If the function is a local function, `FileName` is the full path to the main function. • `Type` – Type of function. For example, MATLAB function, MEX-function, local function, or nested function. • `NumCalls` – Number of times the profiled code called the function. • `TotalTime` – Total time spent in the function and its child functions. • `TotalRecursiveTime` – MATLAB no longer uses this field. • `Children` – Information about functions that the function called. Each entry in the array contains information about one child function. The structure contains these fields: • `Index` – Index to child function information structure within `FunctionTable`.

Field	Description
	• `NumCalls` – Number of times the profiled code called the child function. • `TotalTime` – Total time spent in the child function. • `Parents` – Information about the parent functions of `FunctionName`. Each structure in the array contains information about one of the parents. The structure contains these fields: • `Index` – Index to parent function information structure within `FunctionTable`. • `NumCalls` – Number of times the parent function called this function. • `ExecutedLines` – Array containing line-by-line details for the profiled function. • Column 1 – Line number for the executed line of code in `FileName`. • Column 2 – Number of times the profiled code executed the line of code. • Column 3 – Total time spent on the line of code. The sum of Column 3 entries does not necessarily add up to the `TotalTime`. • `IsRecursive` – Indicator of whether the function is recursive. If the value is `1` (`true`), the function is recursive. If the value is `0` (`false`), the function is nonrecursive. • `PartialData` – Indicator of whether the profile statistics are incomplete. If the value is logical `1` (`true`), the function was modified during profiling. For example, if you edited the function or cleared it from memory. In that event, the Profiler collects data only up until you modified the function.
`FunctionHis-`	Function call history, returned as an array. • Row 1 – Indicator of function entry or exit. The Profiler records function entry with a `0`, and function exit with a `1`. • Row 2 – Index to function information structure within `FunctionTable`.

Field	Description
`ClockPrecis`	Precision of the time measurement of the `profile` function, returned as a `double`.
`ClockSpeed`	Estimated CPU clock speed, returned as a `double`.
`Name`	Name of the profiler, returned as a character array.
`Overhead`	Reserved for future use.

s — Profiler status
structure

Profiler status, returned as a structure containing these fields.

Field	Values	Default Value
`ProfilerStatus`	`'on'` or `'off'`	`'off'`
`DetailLevel`	`'mmex'`	`'mmex'`
`Timer`	`'performance'`, `'processor'`, `'cpu'`, or `'real'`	`'performance'`
`HistoryTracking`	`'on'` or `'off'`	`'off'`
`HistorySize`	integer	1000000

Tips

- To open the Profiler user interface, use the `profile viewer` syntax or see Profiling for Improving Performance.
- As of MATLAB R2015b, the default timer is `'performance'`. In previous versions of MATLAB, the default profiler timer was `'cpu'`, which measures compute time instead of wall-clock time.

See Also

See Also

`matlab.codetools.requiredFilesAndProducts` | `mlint` | `profsave`

Topics

Profiling for Improving Performance
"Profiling Parallel Code" (Parallel Computing Toolbox)

Introduced before R2006a

profsave

Save profile report in HTML format

Syntax

```
profsave
profsave(profinfo)
profsave(profinfo,dirname)
```

Description

`profsave` executes the `profile('info')` function and saves the results in HTML format. `profsave` creates a separate HTML file for each function listed in the `FunctionTable` field of the structure returned by `profile`. By default, `profsave` stores the HTML files in a subfolder of the current folder named `profile_results`.

`profsave(profinfo)` saves the profiling results, `profinfo`, in HTML format. `profinfo` is a structure of profiling information returned by the `profile('info')` function.

`profsave(profinfo,dirname)` saves the profiling results, `profinfo`, in HTML format. `profsave` creates a separate HTML file for each function listed in the `FunctionTable` field of `profinfo` and stores them in the folder specified by `dirname`.

Examples

Run `profile` and save the results.

```
profile on
plot(magic(5))
profile off
profsave(profile('info'),'myprofile_results')
```

See Also

`profile`

Topics

Profiling for Improving Performance

Introduced before R2006a

propedit

Open Property Editor

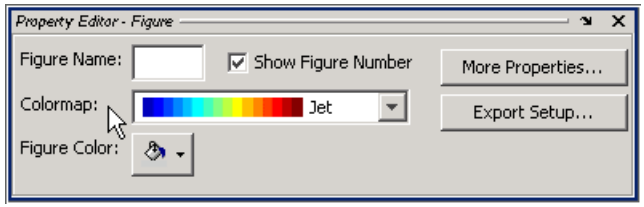

Syntax

```
propedit
propedit(handle_list)
```

Description

`propedit` starts the Property Editor, a graphical user interface to the properties of graphics objects. If no current figure exists, `propedit` will create one.

`propedit(handle_list)` edits the properties for the object (or objects) in `handle_list`.

Starting the Property Editor enables plot editing mode for the figure.

See Also

`inspect` | `plotedit` | `propertyeditor`

Introduced before R2006a

propedit (COM)

Open built-in property page for control

Syntax

```
propedit(h)
```

Description

`propedit(h)` requests the control to display its built-in property page. Note that some controls do not have a built-in property page. For those controls, this command fails.

COM functions are available on Microsoft Windows systems only.

See Also

`get (COM)` | `inspect`

Introduced before R2006a

properties

Class property names

Syntax

```
properties('classname')
properties(obj)
p = properties(...)
```

Description

`properties('classname')` displays the names of the public properties for the MATLAB class named by `classname`. The `properties` function also displays inherited properties.

`properties(obj)` `obj` can be either a scalar object or an array of objects. When `obj` is scalar, `properties` also returns dynamic properties. See "Dynamic Properties — Adding Properties to an Instance" for information on using dynamic properties.

`p = properties(...)` returns the property names in a cell array of strings.

A property is public when its `GetAccess` attribute value is `public` and its `Hidden` attribute value is `false` (default values for these attributes). See "Property Attributes" for a complete list of attributes.

The word `properties` is also a MATLAB class-definition keyword. See `classdef` for more information on class definition keywords.

Examples

Retrieve the names of the public properties of class `memmapfile` and store the result in a cell array of strings:

```
p = properties('memmapfile');
disp(p)
```

```
    'writable'
    'offset'
    'format'
    'repeat'
    'filename'
```

Construct an instance of the `MException` class and get its properties names:

```
me = MException('Msg:ID','MsgText');
properties(me)
Properties for class MException:

    identifier
    message
    cause
    stack
```

Tutorials

- "Properties"

See Also

`fieldnames` | `events` | `methods`

Topics

"Properties"

propertyeditor

Show or hide **Property Editor**

Syntax

```
propertyeditor('on')
propertyeditor('off')
propertyeditor
propertyeditor(figure_handle,...)
```

Description

`propertyeditor('on')` displays the Property Editor tool on the current figure.

`propertyeditor('off')` hides the Property Editor on the current figure.

`propertyeditor` toggles the visibility of the Property Editor on the current figure. You can also use `propertyeditor('toggle')`instead for the same functionality.

`propertyeditor(figure_handle,...)` displays or hides the Property Editor on the figure specified by `figure_handle`.

Examples

Open Property Editor

Create a simple plot and open the property editor.

```
plot(1:10)
propertyeditor
```

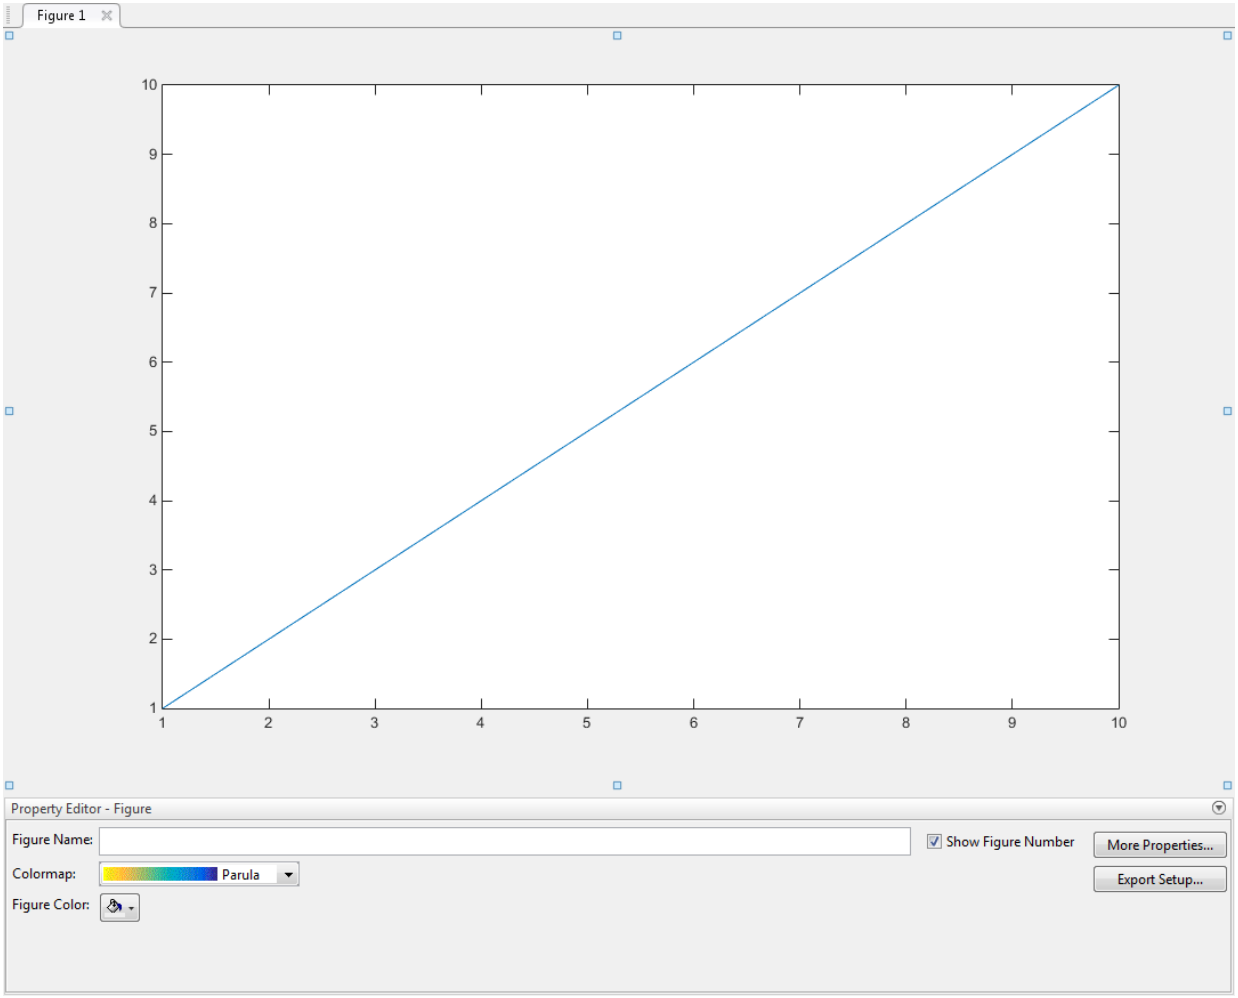

Tips

If you call `propertyeditor` in a MATLAB program and subsequent lines depend on the Property Editor being fully initialized, follow it by `drawnow` to ensure complete initialization.

Alternatives

To collectively enable the plot tools, use the larger icon on the figure toolbar. To collectively disable the plot tools, use the smaller icon . Open or close the **Property Editor** tool from the figure's **View** menu. For details, see “Customize Objects in Graph”.

See Also

`plottools` | `plotbrowser` | `figurepalette` | `inspect`

Introduced before R2006a

matlab.mixin.util.PropertyGroup class

Package: matlab.mixin.util

Custom property list for object display

Description

Use the `PropertyGroup` class to create custom property display lists for class derived from `matlab.mixin.CustomDisplay`. You can change the order of properties displayed and specify which properties to display.

Construction

`P = matlab.mixin.util.PropertyGroup(propertyList)` constructs a property group object with the supplied `propertyList`.

`P = matlab.mixin.util.PropertyGroup(propertyList,title)` displays `title` above the list of properties.

Input Arguments

`propertyList`

The `propertyList` is either a cell array of property names, or a scalar `struct` with property name-value pairs.

`title`

Text to display above properties.

Properties

`NumProperties`

The number of properties in the `PropertyList`.

Attributes:

Dependent	true
GetAccess	public
GetObservable	true
SetAccess	private
Transient	true

PropertyList

The list of properties to display, stored as a scalar `struct` or a cell array of `char` vectors.

Attributes:

GetAccess	public
GetObservable	true
SetAccess	public
SetObservable	true

Title

An optional title for the `PropertyGroup`.

Attributes:

GetAccess	public
GetObservable	true
SetAccess	public
SetObservable	true

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

See Also

See Also

matlab.mixin.CustomDisplay

Topics

"Customize Property Display"
"Custom Display Interface"
Property Attributes

Introduced in R2013b

psi

Psi (polygamma) function

Syntax

```
Y = psi(X)
Y = psi(k,X)
```

Description

`Y = psi(X)` evaluates the ψ function for each element of array `X`. `X` must be real and nonnegative. The ψ function, also known as the digamma function, is the logarithmic derivative of the gamma function

$$\begin{aligned}\psi(x) &= \text{digamma}(x)\\ &= \frac{d(\log(\Gamma(x)))}{dx}\\ &= \frac{d(\Gamma(x))\,/\,dx}{\Gamma(x)}\end{aligned}$$

`Y = psi(k,X)` evaluates the `k`th derivative of ψ at the elements of `X`. `psi(0,X)` is the digamma function, `psi(1,X)` is the trigamma function, `psi(2,X)` is the tetragamma function, etc.

Examples

Example 1

Use the `psi` function to calculate Euler's constant, γ.

```
format long
-psi(1)
ans =
   0.57721566490153
```

```
-psi(0,1)
ans =
   0.57721566490153
```

Example 2

The trigamma function of 2, `psi(1,2)`, is the same as $(\pi^2/6) - 1$.

```
format long
psi(1,2)
ans =
   0.64493406684823

pi^2/6 - 1
ans =
   0.64493406684823
```

References

[1] Abramowitz, M. and I. A. Stegun, *Handbook of Mathematical Functions*, Dover Publications, 1965, Sections 6.3 and 6.4.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

For the syntax `Y = psi(k,X)`, `k` must be a non-tall scalar.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`gamma` | `gammainc` | `gammaln`

Introduced before R2006a

publish

Generate view of MATLAB file in specified format

Syntax

```
publish(file)
publish(file,format)

publish(file,Name,Value)
publish(file,options)

my_doc = publish(file, ___ )
```

Description

`publish(file)` generates a view of a MATLAB file in HTML format for sharing your code. For example, `publish('myfile.m')` executes the code in `myfile.m` using the base workspace and saves the formatted code and results in `/html/myfile.html`. The `html` subfolder is relative to the `file` folder.

When MATLAB publishes a file, it can delete existing files from the output folder that start with the same name as `file`.

`publish(file,format)` generates a view of a MATLAB file in the specified file format. The resulting files save to the `html` subfolder for all file formats.

`publish(file,Name,Value)` generates a view of the MATLAB file, `file`, with options specified by one or more name-value pair arguments.

`publish(file,options)` uses the `options` structure to customize the output, which is useful when you want to preconfigure and save your options for repeated use. The `options` structure fields and values correspond to names and values of name-value pair arguments, respectively.

`my_doc = publish(file, ___ )` generates a view of the MATLAB file `file`, and returns the path of the resulting output file. It can include any of the input arguments in previous syntaxes.

Examples

Generate HTML View of MATLAB Script

Generate an HTML view of the code, MATLAB results, and comments in a MATLAB script.

Copy the example file, `fourier_demo2.m`, to your current folder.

```
copyfile(fullfile(matlabroot,'help','techdoc',...
'matlab_env','examples','fourier_demo2.m'),'.','f')
```

Generate an HTML view of the MATLAB file.

```
 publish('fourier_demo2.m');
```

The `publish` command executes the code for each cell in `fourier_demo2.m`, and saves the file to `/html/fourier_demo2.html`.

View the HTML file.

```
web('html/fourier_demo2.html')
```

Generate View of MATLAB Script in Microsoft Word Format

Generate a Microsoft Word view of the code, MATLAB results, and comments in a MATLAB script.

Copy the example file to your current folder.

```
copyfile(fullfile(matlabroot,'help','techdoc',...
'matlab_env','examples','fourier_demo2.m'),'.','f')
```

Publish the file in Microsoft Word format.

```
publish('fourier_demo2.m','doc');
```

View the published output.

```
winopen('html/fourier_demo2.doc')
```

Publish MATLAB Script Using Name-Value Pairs to Customize Output

Generate an HTML view of the code, MATLAB results, and comments in a MATLAB script. Use name-value pair arguments to include window decorations in the published output.

Copy the example file to your current folder.

```
copyfile(fullfile(matlabroot,'help','techdoc',...
'matlab_env','examples','fourier_demo2.m'),'.','f')
```

Publish the example MATLAB file to HTML format.

```
publish('fourier_demo2.m', 'figureSnapMethod', 'entireFigureWindow')
```

The `'figureSnapMethod','entireFigureWindow'` name-value pair argument specifies to include the window decorations in the figures, and to match the figure background color to the screen color.

View the published output.

```
web('html/fourier_demo2.html')
```

Customize `publish` Output Using Options Structure

Generate a Microsoft Word view of the code, MATLAB results, and comments in a MATLAB script. Use a structure to customize the published output.

Specifying options as a structure is useful when you want to preconfigure and save your options for repeated use.

Copy the example file to your current folder.

```
copyfile(fullfile(matlabroot,'help','techdoc',...
'matlab_env','examples','fourier_demo2.m'),'.','f')
```

Define options to customize the published output as a structure, `options_doc_nocode`.

```
options_doc_nocode.format = 'doc';
options_doc_nocode.showCode = false;
```

Publish the file, specifying the options structure.

```
publish('fourier_demo2.m',options_doc_nocode);
```

Save File Path of Published Script to Variable

Generate an HTML view of a MATLAB script, and save the path of the published HTML file to a variable.

This example assumes that the current folder is `C:\my_MATLAB_files`.

Copy the example file to your current folder.

```
copyfile(fullfile(matlabroot,'help','techdoc',...
'matlab_env','examples','fourier_demo2.m'),'.','f')
```

Publish the MATLAB file, and save the path of the resulting published HTML file to an output variable.

```
mydoc = publish('fourier_demo2.m')
```

```
mydoc =

C:\my_MATLAB_files\html\fourier_demo2.html
```

Input Arguments

`file` — MATLAB file

character vector

Full or partial path of the MATLAB file for which you want to generate a presentation view, specified as a character vector.

Example: `'myfile.m'`

`format` — Output format of published file

`'html'` (default) | `'doc'` | `'latex'` | `'ppt'` | `'xml'` | `'pdf'`

Output format of published MATLAB file, specified as one of the following values.

Output Format	Value	Notes
Hypertext Markup Language	`'html'` (default)	
Microsoft Word	`'doc'`	Format only available on Windows platforms.
LaTeX	`'latex'`	
Microsoft PowerPoint	`'ppt'`	Format only available on Windows platforms.
Extensible Markup Language	`'xml'`	
Portable Document Format	`'pdf'`	

Example: `publish('myfile.m','ppt');`

`options` — Options for published output

MATLAB structure

Options for published output, specified as a structure. Use the options structure instead of name-value pair arguments when you want to reuse the same configuration for publishing multiple MATLAB code files.

The `options` structure field and values correspond to names and values of the name-value pair arguments, respectively.

For example, to specify the PDF output format and the output folder `C:\myPublishedOutput`, use:

```
options = struct('format','pdf','outputDir','C:\myPublishedOutput')
```

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'format','latex','showCode',false` specifies LaTeX output file format and excludes the code from the output.

Output Options

`'format'` — Published output file format

`'html'` (default) | `'doc'` | `'latex'` | `'ppt'` | `'xml'` | `'pdf'`

Published output file format, specified as the comma-separated pair consisting of `'format'` and one of the following values.

Output Format	Value
Hypertext Markup Language	`'html'` (default)
Microsoft Word	`'doc'`
LaTeX	`'latex'`

Output Format	Value
Microsoft PowerPoint	`'ppt'`
Extensible Markup Language	`'xml'`
Portable Document Format	`'pdf'`

`'outputDir'` — Output folder
`''` (default) | full path

Output folder to which the published document is saved, specified as the comma-separated pair consisting of `'outputDir'` and the full path. You must specify the full path as a character vector, for example `'C:\myPublishedOutput'`.

The default value, `''`, specifies the `html` subfolder of the current folder.

`'stylesheet'` — Extensible Stylesheet language (XSL) file
`''` (default) | full path to XSL file name

Extensible Stylesheet Language (XSL) file to use when publishing MATLAB code to HTML, XML, or LaTeX format, specified as the comma-separated pair consisting of `'stylesheet'` and the full path to the XSL file. The full path must be a character vector, for example, `'C:\myStylesheet\stylesheet.xsl'`

The default value, `''`, specifies the MATLAB default style sheet.

Figure Options

`'createThumbnail'` — Thumbnail image creation
`true` (default) | `false`

Thumbnail image creation for the published document, specified as the comma-separated pair consisting of `'createThumbnail'` and either `true` or `false`. You can use this thumbnail to represent your file in HTML pages.

`'figureSnapMethod'` — Published figure window appearance
`'entireGUIWindow'` (default) | `'print'` | `'getframe'` | `'entireFigureWindow'`

Appearance of published figure windows, including window decorations and background color, specified as the comma-separated pair consisting of `'figureSnapMethod'` and one of the following values.

Value	Window Decorations		Background Color	
	GUIs	Figures	GUIs	Figures
`'entireGUIWindow'` (default)	Included	Excluded	Matches screen	White
`'print'`	Excluded	Excluded	White	White
`'getframe'`	Excluded	Excluded	Matches screen	Matches screen
`'entireFigureWindow'`	Included	Included	Matches screen	Matches screen

`'imageFormat'` — Published image file format
`'png' | 'epsc2' | 'jpg' | ...`

Published image file format, specified as the comma-separated pair consisting of `'imageFormat'` and one of the following values.

`'format'` Value	Valid `'imageFormat'` Value	Default `'imageFormat'` Value
`'doc'`	Any image format that your installed version of Microsoft Office can import, including `'png'` , `'jpg'`, `'bmp'`, and `'tiff'`. If the `'figureSnapMethod'` is `'print'`, then you can also specify `'eps'`, `'epsc'`, `'eps2'`, `'ill'`, `'meta'`, and `'pdf'`.	`'png'`
`'html'`	Any format publishes successfully. Ensure that the tools you use to view and process the output files can display the output format you specify.	`'png'`
`'latex'`	Any format publishes successfully. Ensure that the tools you use to view and process the output files can display the output format you specify.	`'epsc2'`, except when `'figureSnapMethod'` is any one of the following: • `'getframe'` • `'entireFigureWindow'`

		• 'entireGUIWindow' and the snapped window is a GUI window In these cases the default is 'png'
'pdf'	'bmp' or 'jpg'.	'bmp'
'ppt'	Any format that your installed version of Microsoft Office can import, including 'png', 'jpg', 'bmp', and 'tiff'.	'png'
'xml'	Any format publishes successfully. Ensure that the tools you use to view and process the output files can display the output format you specify.	'png'

'maxHeight' — Maximum height of published images
[ ] (default) | positive integer value

Maximum height of published images that the code generates, specified as the comma-separated pair consisting of 'maxHeight' and one of the following values:

- [ ] (default)—Unrestricted height. This value is always used when the 'format' value is 'pdf'.
- Positive integer value that specifies the image height in pixels.

'maxWidth' — Maximum width of published images
[ ] (default) | positive integer value

Maximum width of an image that the code generates, specified as the comma-separated pair consisting of 'maxWidth' and one of the following values:

- [ ] (default)—Unrestricted width. This value is always used when the 'format' value is 'pdf'.
- Positive integer value that specifies the image width in pixels.

'useNewFigure' — Create new figure
true (default) | false

A logical value that determines if MATLAB creates a new Figure window for figures that the code generates, specified as the comma-separated pair consisting of `'useNewFigure'` and one of the following:

- `true` (default)—If the code generates a figure, then MATLAB creates a Figure window with a white background, and at the default size before publishing.
- `false`—MATLAB does not create a figure window.

  This value enables you to use a figure with different properties for publishing. For example, open a Figure window, change the size and background color, and then publish your code. Figures in your published document use the characteristics of the figure you opened before publishing.

Code Options

`'evalCode'` — Option to run code

`true` (default) | `false`

Option to evaluate code and include the MATLAB output in the published view, specified as a logical value.

`'catchError'` — Error handling during publishing

`true` (default) | `false`

Error handling during publishing, specified as the comma-separated pair consisting of `'catchError'` and one of the following logical values:

- `true` (default)—MATLAB continues publishing and includes the error in the published file.
- `false`—MATLAB displays the error at the command line and does not produce a published file.

`'codeToEvaluate'` — Additional code to evaluate during publishing

character vector

Additional code to evaluate during publishing, specified as the comma-separated pair consisting of `'codeToEvaluate'` and a character vector with the corresponding code. Use this option to specify code that does not appear in the MATLAB file, for example to set the value of an input argument for a function being published.

If this option is unspecified, MATLAB evaluates only the code in the MATLAB file you are publishing.

`'maxOutputLines'` — Maximum number of lines
`Inf` (default) | nonnegative integer value

Maximum number of lines in MATLAB output per cell evaluated during publishing, specified as the comma-separated pair consisting of `'maxOutputLines'` and one of the following values:

- `Inf` (default)—MATLAB includes all output lines in the published output.
- Nonnegative integer—MATLAB truncates the number of lines in the output at the number of lines you specify.

`'showCode'` — Option to include code in published file
`true` (default) | `false`

Option to include code in published file, specified as the comma-separated pair consisting of `'showCode'` and a logical value.

Definitions

Window Decorations

Window decorations include window title bar, toolbar, menu bar, and window border.

Syntax Highlighting

Syntax highlighting colors various elements in code to help you identify these elements while reading or editing code. By default, keywords are blue, character vectors are purple, and unterminated character vectors are maroon.

MATLAB does not preserve syntax highlighting when you set `'format'` to `'latex'` or `'ppt'`.

Tips

- If `'format` is `'html'`, MATLAB includes the code being published at the end of the published HTML file as comments, even when you set the `'showCode'` option to `false`. Because MATLAB includes the code as comments, this code does not display

in a Web browser. This enables you to use the `grabcode` function to extract the MATLAB code from an HTML file, even when the file does not display the code.

See Also

See Also

`grabcode`

Topics

"Publishing MATLAB Code"
"Publishing Markup"

Introduced before R2006a

PutCharArray

Store character array in Automation server

Syntax

IDL Method Signature

```
PutCharArray([in] BSTR varname, [in] BSTR workspace,
    [in] BSTR string)
```

Microsoft Visual Basic Client

```
PutCharArray(varname As String, workspace As String,
    string As String)
```

MATLAB Client

```
PutCharArray(h,'varname','workspace','string')
```

Description

`PutCharArray(h,'varname','workspace','string')` stores the character array in `string` in the specified `workspace` of the server attached to handle `h`, assigning to it the variable `varname`. The values for *`workspace`* are `base` or `global`. The function name is case-sensitive.

Examples

Visual Basic .NET Client

This example uses the Visual Basic `MsgBox` command to control flow between MATLAB and the Visual Basic Client.

```
Dim Matlab As Object
```

```
Try
    Matlab = GetObject(, "matlab.application")
Catch e As Exception
    Matlab = CreateObject("matlab.application")
End Try
MsgBox("MATLAB window created; now open it...")
```

Open the MATLAB window, then click **Ok**.

```
Matlab.PutCharArray("str", "base", _
       "He jests at scars that never felt a wound.")
MsgBox("In MATLAB, type" & vbCrLf _
  & "str")
```

In the MATLAB window type `str`; MATLAB displays:

```
str =
He jests at scars that never felt a wound.
```

Click **Ok**.

```
MsgBox("closing MATLAB window...")
```

Click **Ok** to close and terminate MATLAB.

```
Matlab.Quit()
```

Tips

The character array specified in the `string` argument can have any dimensions. However, `PutCharArray` changes the dimensions to a 1-by-n column-wise representation, where n is the number of characters in the array. Executing the following commands in MATLAB illustrates this behavior:

```
h = actxserver('matlab.application');
chArr = ['abc'; 'def'; 'ghk']
chArr =
abc
def
ghk

PutCharArray(h,'Foo','base',chArr)
tstArr = GetCharArray(h,'Foo','base')
```

```
tstArr =
adgbehcfk
```

See Also

GetCharArray | PutWorkspaceData | GetWorkspaceData | Execute

Introduced before R2006a

PutFullMatrix

Matrix in Automation server workspace

Syntax

IDL Method Signature

```
PutFullMatrix([in] BSTR varname, [in] BSTR workspace,
[in] SAFEARRAY(double) xreal, [in] SAFEARRAY(double) ximag)
```

Microsoft Visual Basic Client

```
PutFullMatrix([in] varname As String, [in] workspace As String,
[in] xreal As Double, [in] ximag As Double)
```

MATLAB Client

```
PutFullMatrix(h,'varname','workspace',xreal,ximag)
```

Description

`PutFullMatrix(h,'varname','workspace',xreal,ximag)` stores a matrix in the specified *`workspace`* of the server attached to handle `h` and assigns it to variable `varname`. Use `xreal` and `ximag` for the real and imaginary parts of the matrix. The values for *`workspace`* are `base` or `global`.

The matrix cannot be a scalar, an empty array, or have more than two dimensions. To use higher dimensional matrices, reshape the matrix to a 2D matrix before sending it to the MATLAB server. Then change the dimensions back after receiving it from MATLAB.

For VBScript clients, use the `GetWorkspaceData` and `PutWorkspaceData` functions to pass numeric data to and from the MATLAB workspace. These functions use the `variant` data type instead of `safearray`, which VBScript does not support.

Examples

This example uses a Visual Basic .NET client to write a matrix to the base workspace of the server:

```
Dim MatLab As Object
Dim XReal(4, 4) As Double
Dim XImag(4, 4) As Double
Dim ZReal(4, 4) As Double
Dim ZImag(4, 4) As Double
Dim i, j As Integer

For i = 0 To 4
   For j = 0 To 4
   XReal(i, j) = Rnd() * 6
   XImag(i, j) = 0
   Next j
Next i

Matlab = CreateObject("matlab.application")
MatLab.PutFullMatrix("M","base",XReal,XImag)
MatLab.GetFullMatrix("M","base",ZReal,ZImag)
```

Use a Visual Basic .NET client to write a matrix to the global workspace of the server:

```
Dim MatLab As Object
Dim XReal(1,2) As Double
Dim XImag(1,2) As Double
Dim result As String
Dim i,j As Integer

For i = 0 To 1
 For j = 0 To 2
  XReal(i,j) = (j * 2 + 1) + i
  XImag(i,j) = 1
 Next j
Next i

Matlab = CreateObject("matlab.application")
MatLab.PutFullMatrix("X","global",XReal,XImag)
result = Matlab.Execute("whos global")
MsgBox(result)
```

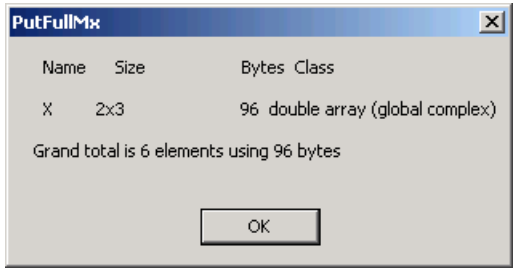

See Also

`GetFullMatrix` | `PutWorkspaceData` | `Execute`

Topics

Introduced before R2006a

PutWorkspaceData

Data in Automation server workspace

Syntax

IDL Method Signature

```
PutWorkspaceData([in] BSTR varname, [in] BSTR workspace,
[in] VARIANT data)
```

Microsoft Visual Basic Client

```
PutWorkspaceData(varname As String, workspace As String,
data As Object)
```

MATLAB Client

```
PutWorkspaceData(h,'varname','workspace',data)
```

Description

`PutWorkspaceData(h,'varname','workspace',data)` stores `data` in the *`workspace`* of the server attached to handle `h` and assigns it to `varname`. The values for *`workspace`* are `base` or `global`.

Use `PutWorkspaceData` to pass numeric and character array data respectively to the server. Do *not* use `PutWorkspaceData` on sparse arrays, structures, or function handles. Use the `Execute` method for these data types.

The `GetWorkspaceData` and `PutWorkspaceData` functions pass numeric data as a `variant` data type. These functions are especially useful for VBScript clients as VBScript does not support the `safearray` data type used by `GetFullMatrix` and `PutFullMatrix`.

Examples

Create an array in a Visual Basic .NET client and put it in the base workspace of the MATLAB Automation server:

1. Create the Visual Basic application. Use the `MsgBox` command to control flow between MATLAB and the application:

```
Dim Matlab As Object
Dim data(6) As Double
Dim i As Integer
MatLab = CreateObject("matlab.application")
For i = 0 To 6
   data(i)  = i * 15
Next i
MatLab.PutWorkspaceData("A","base",data)
MsgBox("In MATLAB, type" & vbCrLf & "A")
```

2. Open the MATLAB window and type `A`. MATLAB displays:

```
A =
     0    15    30    45    60    75    90
```

3. Click **Ok** to close and terminate MATLAB.

Tutorials

- "Conversion of COM Types to MATLAB Types"

See Also

`GetWorkspaceData` | `PutFullMatrix` | `PutCharArray` | `Execute`

Topics

"Conversion of COM Types to MATLAB Types"

Introduced before R2006a

pwd

Identify current folder

Syntax

```
pwd
currentFolder = pwd
```

Description

`pwd` displays the MATLAB current folder.

`currentFolder = pwd` returns the path to the current folder.

Examples

Store the Path to the MATLAB® Current Folder

Change the current folder to a local folder and store the path.

```
cd c:\myMATLABFiles
currentFolder = pwd
```

```
currentFolder =

  1×16 char array

c:\myMATLABFiles
```

Alternative Functionality

View the current folder in the Current Folder toolbar.

Output Arguments

`currentFolder` — Path to the MATLAB current folder
character vector

Path to the MATLAB current folder, specified as a character vector.

See Also

See Also
`cd` | `dir`

Introduced before R2006a

pyargs

Create keyword argument for Python function

Syntax

```
kwa = pyargs(argKey,argValue)
```

Description

`kwa = pyargs(argKey,argValue)` creates a `pyargs` keyword argument to pass to a Python function.

Examples

Use Keyword Argument to Modify Calendar Month Display

Create a calendar.

```
cal = py.calendar.TextCalendar;
```

Display calendar for December 2014.

```
formatmonth(cal,int32(2014),int32(12))
```

```
ans =

  Python str with no properties.

       December 2014
Mo Tu We Th Fr Sa Su
 1  2  3  4  5  6  7
 8  9 10 11 12 13 14
15 16 17 18 19 20 21
22 23 24 25 26 27 28
29 30 31
```

Read the function signature from the Python documentation for the `calendar.TextCalendar.formatmonth` function.

```
py.help('calendar.TextCalendar.formatmonth')
```

```
Help on method formatmonth in calendar.TextCalendar:

calendar.TextCalendar.formatmonth = formatmonth(self, theyear, themonth, w=0, l=0) unbo
    Return a month's calendar string (multi-line).
```

Arguments `w` and `l` are optional, with default values of `0`.

Read the function signature in MATLAB.

```
methods(cal,'-full')
```

```
lhs formatmonth(self, theyear, themonth, w, l, pyargs)
```

Search the output for the `formatmonth` function signature. You can use the `pyargs` argument instead of the optional `w` and `l` arguments.

Change the line spacing, `l`, using a `pyargs` argument.

```
formatmonth(cal,int32(2014),int32(12),pyargs('l',int32(2)))
```

```
ans =

  Python str with no properties.

       December 2014

Mo Tu We Th Fr Sa Su

 1  2  3  4  5  6  7

 8  9 10 11 12 13 14

15 16 17 18 19 20 21

22 23 24 25 26 27 28

29 30 31
```

Input Arguments

`argKey,argValue` — Python function arguments
keyword and value arguments

Python function keyword arguments specified as one or more comma-separated pairs of `argKey,argValue` arguments. `argKey` is the Python function key name and is a string or character vector. `argValue` is the argument value, represented by any type. Use the function argument list to identify `argKey` and `argValue`. You can specify several key and value pair arguments in any order as `argKey1,argValue1,...,argKeyN,argValueN`.

Example: `'length',int32(2)`

See Also

External Websites

python.org calendar.TextCalendar method

Introduced in R2014b

matlab.exception.PyException class

Package: matlab.exception

Capture error information for Python exception

Description

Process information from a `matlab.exception.PyException` object to handle Python errors thrown from Python methods called from MATLAB. This class is derived from MException.

Construction

`e = matlab.exception.PyException(msgID,errMsg,excObj)` constructs instance `e` of `matlab.exception.PyException` class.

Input Arguments

`msgID` — Message identifier
character vector

Message identifier, specified as a character vector.

`errMsg` — Error message
character vector

Error message, specified as a character vector.

`excObj` — Exception object
`pythonclass`

Exception object, specified as the `pythonclass` that caused the exception.

Output Arguments

`e` — Exception object
exception object

Instance of `matlab.exception.PyException` class

Properties

`ExceptionObject` — Object

exception object

Result from Python `sys.exc_info` function. For information about what the function returns, type:

```
help('py.sys.exc_info')
```

```
exc_info() -> (type, value, traceback)

Return information about the most recent exception caught by an except
clause in the current stack frame or in an older stack frame.
```

Examples

Catch Python Exception

Generate a Python exception and display information.

```
try
  py.list('x','y',1)
catch e
  e.message
  if(isa(e,'matlab.exception.PyException'))
    e.ExceptionObject
  end
end
```

```
ans =

Python Error: TypeError: list() takes at most 1 argument (3 given)

ans =

  Python tuple with no properties.

    (<type 'exceptions.TypeError'>, TypeError('list() takes at most 1 argument (3 given
```

When MATLAB displays a message containing the text `Python Error`, refer to your Python documentation for more information.

Tips

- Typically, you do not construct a `matlab.exception.PyException` object explicitly. MATLAB automatically constructs a `PyException` object whenever Python throws an exception. The `PyException` object wraps the original Python exception.

See Also

Topics

"Capture Information About Exceptions"
"Throw an Exception"

External Websites

www.python.org/doc
sys.exc_info

Introduced in R2014b

pyversion

Change default version of Python interpreter

Syntax

```
pyversion
[version, executable, isloaded] = pyversion
```

```
___ = pyversion version
___ = pyversion executable
```

Description

`pyversion` displays details about the current Python version.

`[version, executable, isloaded] = pyversion` returns Python version information.

`___ = pyversion version` changes the default Python version on Microsoft Windows platforms. The setting is persistent across MATLAB sessions.

You cannot change the version after MATLAB loads Python. To change the version if Python is loaded already, restart MATLAB, and then call `pyversion`.

`___ = pyversion executable` specifies full path to Python executable. Use on any platform or for repackaged CPython implementation downloads.

Examples

Display Python Version for Your System

```
pyversion
```

```
       version: '2.7'
    executable: 'C:\Python27\python.exe'
       library: 'C:\windows\system32\python27.dll'
          home: 'C:\Python27'
```

```
      isloaded: 0
```

Use Python Version 2.7

```
[v, e, isloaded] = pyversion;
if isloaded
    disp('To change the Python version, restart MATLAB, then call pyversion.')
else
    pyversion 2.7
end
```

Input Arguments

`version` — Python version number

string | character vector

Python version number, specified as a string or character vector. Version must contain the major and minor version numbers separated by a period. Windows platform only.

`pyversion` looks for the version in the Windows registry. If you download from `www.python.org/downloads`, the installation automatically adds the version to the registry. If you download the Python application from a different source, either add it to the registry, or use the `pyversion(executable)` syntax to change the version.

Example: `3.5`

`executable` — Name of existing Python executable file

string | character vector

Name of an existing Python executable file, specified as a string or character vector. This argument must contain the name of the Python executable file and it can contain the full path.

Example: `C:\Python33\python.exe`

Example: `/usr/bin/python`

Output Arguments

`version` — Python version number

character vector

Python version number, returned as a character vector.

`executable` — Name of Python executable file
character vector

Name of Python executable file, returned as a character vector.

`isloaded` — Indicates if specified version is loaded
logical

Indicates if specified version is loaded, returned as logical. MATLAB loads Python when you type a `py.` command.

If MATLAB cannot load Python, `isloaded` is `0` and MATLAB displays “Undefined variable "py" or function "py.command"” when you type a `py.` command.

Limitations

- Do not use `pyversion` to set the version in a MATLAB function containing Python commands. MATLAB loads the Python interpreter when it processes a Python command in the function before it executes the `pyversion` function.

See Also

External Websites
https://www.python.org/downloads

Introduced in R2014b

qmr

Quasi-minimal residual method

Syntax

```
x = qmr(A,b)
qmr(A,b,tol)
qmr(A,b,tol,maxit)
qmr(A,b,tol,maxit,M)
qmr(A,b,tol,maxit,M1,M2)
qmr(A,b,tol,maxit,M1,M2,x0)
[x,flag] = qmr(A,b,...)
[x,flag,relres] = qmr(A,b,...)
[x,flag,relres,iter] = qmr(A,b,...)
[x,flag,relres,iter,resvec] = qmr(A,b,...)
```

Description

`x = qmr(A,b)` attempts to solve the system of linear equations `A*x=b` for `x`. The `n`-by-`n` coefficient matrix `A` must be square and should be large and sparse. The column vector `b` must have length `n`. You can specify `A` as a function handle, `afun`, such that `afun(x,'notransp')` returns `A*x` and `afun(x,'transp')` returns `A'*x`.

"Parameterizing Functions" explains how to provide additional parameters to the function `afun`, as well as the preconditioner function `mfun` described below, if necessary.

If `qmr` converges, a message to that effect is displayed. If `qmr` fails to converge after the maximum number of iterations or halts for any reason, a warning message is printed displaying the relative residual `norm(b-A*x)/norm(b)` and the iteration number at which the method stopped or failed.

`qmr(A,b,tol)` specifies the tolerance of the method. If `tol` is `[]`, then `qmr` uses the default, `1e-6`.

`qmr(A,b,tol,maxit)` specifies the maximum number of iterations. If `maxit` is `[]`, then `qmr` uses the default, `min(n,20)`.

`qmr(A,b,tol,maxit,M)` and `qmr(A,b,tol,maxit,M1,M2)` use preconditioners `M` or `M = M1*M2` and effectively solve the system `inv(M)*A*x = inv(M)*b` for `x`. If `M` is `[]` then `qmr` applies no preconditioner. `M` can be a function handle `mfun` such that `mfun(x,'notransp')` returns `M\x` and `mfun(x,'transp')` returns `M'\x`.

`qmr(A,b,tol,maxit,M1,M2,x0)` specifies the initial guess. If `x0` is `[]`, then `qmr` uses the default, an all zero vector.

`[x,flag] = qmr(A,b,...)` also returns a convergence flag.

Flag	Convergence
0	`qmr` converged to the desired tolerance `tol` within `maxit` iterations.
1	`qmr` iterated `maxit` times but did not converge.
2	Preconditioner `M` was ill-conditioned.
3	The method stagnated. (Two consecutive iterates were the same.)
4	One of the scalar quantities calculated during `qmr` became too small or too large to continue computing.

Whenever `flag` is not `0`, the solution `x` returned is that with minimal norm residual computed over all the iterations. No messages are displayed if the `flag` output is specified.

`[x,flag,relres] = qmr(A,b,...)` also returns the relative residual `norm(b-A*x)/norm(b)`. If `flag` is `0`, `relres <= tol`.

`[x,flag,relres,iter] = qmr(A,b,...)` also returns the iteration number at which `x` was computed, where `0 <= iter <= maxit`.

`[x,flag,relres,iter,resvec] = qmr(A,b,...)` also returns a vector of the residual norms at each iteration, including `norm(b-A*x0)`.

Examples

Using qmr with a Matrix Input

This example shows how to use `qmr` with a matrix input. The code:

```
n = 100;
on = ones(n,1);
A = spdiags([-2*on 4*on -on],-1:1,n,n);
b = sum(A,2);
tol = 1e-8; maxit = 15;
M1 = spdiags([on/(-2) on],-1:0,n,n);
M2 = spdiags([4*on -on],0:1,n,n);
x = qmr(A,b,tol,maxit,M1,M2);
```

displays the message:

```
qmr converged at iteration 9 to a solution...
with relative residual
5.6e-009
```

Using qmr with a Function Handle

This example replaces the matrix `A` in the previous example with a handle to a matrix-vector product function `afun`. The example is contained in a file `run_qmr` that

- Calls `qmr` with the function handle `@afun` as its first argument.
- Contains `afun` as a nested function, so that all variables in `run_qmr` are available to `afun`.

The following shows the code for `run_qmr`:

```
function x1 = run_qmr
n = 100;
on = ones(n,1);
A = spdiags([-2*on 4*on -on],-1:1,n,n);
b = sum(A,2);
tol = 1e-8;
maxit = 15;
M1 = spdiags([on/(-2) on],-1:0,n,n);
M2 = spdiags([4*on -on],0:1,n,n);
x1 = qmr(@afun,b,tol,maxit,M1,M2);

    function y = afun(x,transp_flag)
       if strcmp(transp_flag,'transp')      % y = A'*x
          y = 4 * x;
          y(1:n-1) = y(1:n-1) - 2 * x(2:n);
          y(2:n) = y(2:n) - x(1:n-1);
```

```
        elseif strcmp(transp_flag,'notransp') % y = A*x
           y = 4 * x;
           y(2:n) = y(2:n) - 2 * x(1:n-1);
           y(1:n-1) = y(1:n-1) - x(2:n);
        end
    end
end
```

When you enter

```
x1=run_qmr;
```

MATLAB software displays the message

```
qmr converged at iteration 9 to a solution with relative residual
5.6e-009
```

Using qmr with a Preconditioner

This example demonstrates the use of a preconditioner.

Load `A = west0479`, a real 479-by-479 nonsymmetric sparse matrix.

```
load west0479;
A = west0479;
```

Define `b` so that the true solution is a vector of all ones.

```
b = full(sum(A,2));
```

Set the tolerance and maximum number of iterations.

```
tol = 1e-12;
maxit = 20;
```

Use `qmr` to find a solution at the requested tolerance and number of iterations.

```
[x0,fl0,rr0,it0,rv0] = qmr(A,b,tol,maxit);
```

`fl0` is 1 because `qmr` does not converge to the requested tolerance `1e-12` within the requested 20 iterations. The seventeenth iterate is the best approximate solution and is the one returned as indicated by `it0 = 17`. MATLAB stores the residual history in `rv0`.

Plot the behavior of `qmr`.

```
semilogy(0:maxit,rv0/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

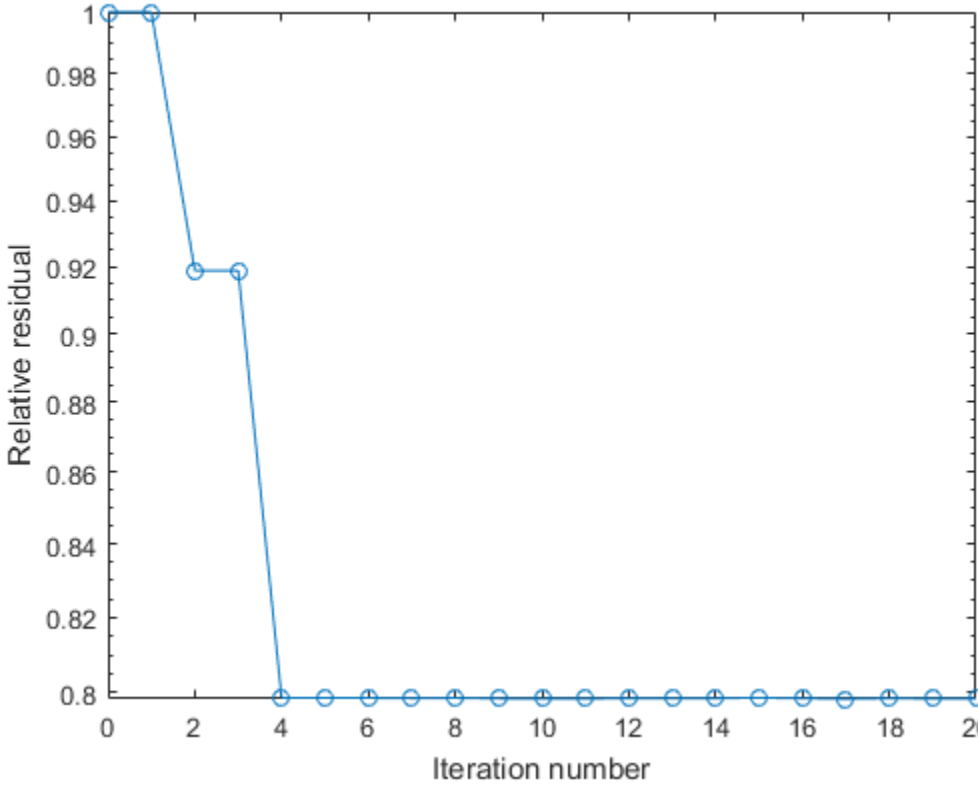

The plot shows that the solution does not converge. You can use a preconditioner to improve the outcome.

Create the preconditioner with `ilu`, since the matrix `A` is nonsymmetric.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-5));
```

```
Error using ilu
```

```
There is a pivot equal to zero. Consider decreasing
the drop tolerance or consider using the 'udiag' option.
```

MATLAB cannot construct the incomplete LU as it would result in a singular factor, which is useless as a preconditioner.

You can try again with a reduced drop tolerance, as indicated by the error message.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-6));
[x1,fl1,rr1,it1,rv1] = qmr(A,b,tol,maxit,L,U);
```

`fl1` is 0 because `qmr` drives the relative residual to `4.1410e-014` (the value of `rr1`). The relative residual is less than the prescribed tolerance of `1e-12` at the sixth iteration (the value of `it1`) when preconditioned by the incomplete LU factorization with a drop tolerance of `1e-6`. The output `rv1(1)` is `norm(b)`, and the output `rv1(7)` is `norm(b-A*x2)`.

You can follow the progress of `qmr` by plotting the relative residuals at each iteration starting from the initial estimate (iterate number 0).

```
semilogy(0:it1,rv1/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

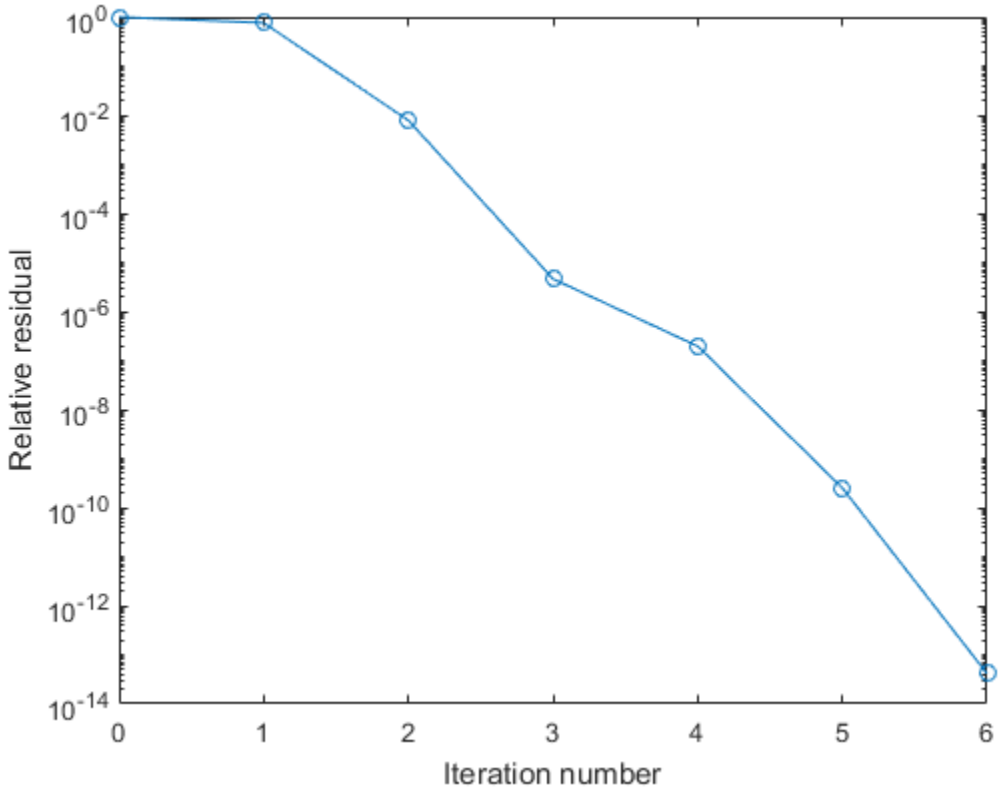

References

[1] Barrett, R., M. Berry, T. F. Chan, et al., *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*, SIAM, Philadelphia, 1994.

[2] Freund, Roland W. and Nöel M. Nachtigal, "QMR: A quasi-minimal residual method for non-Hermitian linear systems," *SIAM Journal: Numer. Math.* 60, 1991, pp. 315–339.

See Also

See Also

`bicg` | `bicgstab` | `cgs` | `gmres` | `ilu` | `lsqr` | `minres` | `mldivide` | `pcg` | `symmlq`

Topics

"Create Function Handle"

Introduced before R2006a

qr

Orthogonal-triangular decomposition

Syntax

```
[Q,R] = qr(A)
[Q,R] = qr(A,0)
[Q,R,E] = qr(A)
[Q,R,E] = qr(A,'matrix')
[Q,R,e] = qr(A,'vector')
[Q,R,e] = qr(A,0)
X = qr(A)
X = qr(A,0)
R = qr(A)
R = qr(A,0)
[C,R] = qr(A,B)
[C,R,E] = qr(A,B)
[C,R,E] = qr(A,B,'matrix')
[C,R,e] = qr(A,B,'vector')
[C,R] = qr(A,B,0)
[C,R,e] = qr(A,B,0)
```

Description

`[Q,R] = qr(A)`, where `A` is `m`-by-`n`, produces an `m`-by-`n` upper triangular matrix `R` and an `m`-by-`m` unitary matrix `Q` so that `A = Q*R`.

`[Q,R] = qr(A,0)` produces the economy-size decomposition. If `m > n`, only the first `n` columns of `Q` and the first `n` rows of `R` are computed. If `m<=n`, this is the same as `[Q,R] = qr(A)`.

If A is full:

`[Q,R,E] = qr(A)` or `[Q,R,E] = qr(A,'matrix')` produces unitary `Q`, upper triangular `R` and a permutation matrix `E` so that `A*E = Q*R`. The column permutation `E` is chosen so that `abs(diag(R))` is decreasing.

`[Q,R,e] = qr(A,'vector')` returns the permutation information as a vector instead of a matrix. That is, `e` is a row vector such that `A(:,e) = Q*R`.

`[Q,R,e] = qr(A,0)` produces an economy-size decomposition in which `e` is a permutation vector, so that `A(:,e) = Q*R`.

`X = qr(A)` and `X = qr(A,0)` return a matrix `X` such that `triu(X)` is the upper triangular factor `R`.

If A is sparse:

`R = qr(A)` computes a `Q`-less `QR` decomposition and returns the upper triangular factor `R`. Note that `R = chol(A'*A)`. Since `Q` is often nearly full, this is preferred to `[Q,R] = QR(A)`.

`R = qr(A,0)` produces economy-size `R`. If `m>n`, `R` has only `n` rows. If `m<=n`, this is the same as `R = qr(A)`.

`[Q,R,E] = qr(A)` or `[Q,R,E] = qr(A,'matrix')` produces unitary `Q`, upper triangular `R` and a permutation matrix `E` so that `A*E = Q*R`. The column permutation `E` is chosen to reduce fill-in in R.

`[Q,R,e] = qr(A,'vector')` returns the permutation information as a vector instead of a matrix. That is, `e` is a row vector such that `A(:,e) = Q*R`.

`[Q,R,e] = qr(A,0)` produces an economy-size decomposition in which `e` is a permutation vector, so that `A(:,e) = Q*R`.

`[C,R] = qr(A,B)`, where `B` has as many rows as `A`, returns `C = Q'*B`. The least-squares solution to `A*X = B` is `X = R\C`.

`[C,R,E] = qr(A,B)` or `[C,R,E] = qr(A,B,'matrix')`, also returns a fill-reducing ordering. The least-squares solution to `A*X = B` is `X = E*(R\C)`.

`[C,R,e] = qr(A,B,'vector')` returns the permutation information as a vector instead of a matrix. That is, the least-squares solution to `A*X = B` is `X(e,:) = R\C`.

`[C,R] = qr(A,B,0)` produces economy-size results. If `m>n`, `C` and `R` have only `n` rows. If `m<=n`, this is the same as `[C,R] = qr(A,B)`.

`[C,R,e] = qr(A,B,0)` additionally produces a fill-reducing permutation vector `e`. In this case, the least-squares solution to `A*X = B` is `X(e,:) = R\C`.

Examples

Find the least squares approximate solution to `A*x = b` with the `Q`-less `QR` decomposition and one step of iterative refinement:

```
if issparse(A), R = qr(A);
else R = triu(qr(A)); end
x = R\(R'\(A'*b));
r = b - A*x;
err = R\(R'\(A'*r));
x = x + err;
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`lu` | `chol` | `null` | `orth` | `qrdelete` | `qrinsert` | `qrupdate`

Introduced before R2006a

qrdelete

Remove column or row from QR factorization

Syntax

```
[Q1,R1] = qrdelete(Q,R,j)
[Q1,R1] = qrdelete(Q,R,j,'col')
[Q1,R1] = qrdelete(Q,R,j,'row')
```

Description

`[Q1,R1] = qrdelete(Q,R,j)` returns the QR factorization of the matrix `A1`, where `A1` is `A` with the column `A(:,j)` removed and `[Q,R] = qr(A)` is the QR factorization of `A`.

`[Q1,R1] = qrdelete(Q,R,j,'col')` is the same as `qrdelete(Q,R,j)`.

`[Q1,R1] = qrdelete(Q,R,j,'row')` returns the QR factorization of the matrix `A1`, where `A1` is `A` with the row `A(j,:)` removed and `[Q,R] = qr(A)` is the QR factorization of `A`.

Examples

```
A = magic(5);
[Q,R] = qr(A);
j = 3;
[Q1,R1] = qrdelete(Q,R,j,'row');

Q1 =
    0.5274   -0.5197   -0.6697   -0.0578
    0.7135    0.6911    0.0158    0.1142
    0.3102   -0.1982    0.4675   -0.8037
    0.3413   -0.4616    0.5768    0.5811

R1 =
   32.2335   26.0908   19.9482   21.4063   23.3297
         0  -19.7045  -10.9891    0.4318   -1.4873
```

```
         0         0   22.7444    5.8357   -3.1977
         0         0         0  -14.5784    3.7796
```

returns a valid QR factorization, although possibly different from

```
A2 = A;
A2(j,:) = [];
[Q2,R2] = qr(A2)

Q2 =
   -0.5274    0.5197    0.6697   -0.0578
   -0.7135   -0.6911   -0.0158    0.1142
   -0.3102    0.1982   -0.4675   -0.8037
   -0.3413    0.4616   -0.5768    0.5811

R2 =
  -32.2335  -26.0908  -19.9482  -21.4063  -23.3297
         0   19.7045   10.9891   -0.4318    1.4873
         0         0  -22.7444   -5.8357    3.1977
         0         0         0  -14.5784    3.7796
```

Algorithms

The `qrdelete` function uses a series of Givens rotations to zero out the appropriate elements of the factorization. [1]

References

[1] Golub, Gene H., and Charles F. Van Loan. *Matrix Computations*. 4th ed. Baltimore, MD: Johns Hopkins University Press, 2013, Sections 6.5.2–6.5.3, pp. 335–338.

See Also

`planerot` | `qr` | `qrinsert`

Introduced before R2006a

qrinsert

Insert column or row into QR factorization

Syntax

```
[Q1,R1] = qrinsert(Q,R,j,x)
[Q1,R1] = qrinsert(Q,R,j,x,'col')
[Q1,R1] = qrinsert(Q,R,j,x,'row')
```

Description

`[Q1,R1] = qrinsert(Q,R,j,x)` returns the QR factorization of the matrix `A1`, where `A1` is `A = Q*R` with the column `x` inserted before `A(:,j)`. If `A` has `n` columns and `j = n +1`, then `x` is inserted after the last column of `A`.

`[Q1,R1] = qrinsert(Q,R,j,x,'col')` is the same as `qrinsert(Q,R,j,x)`.

`[Q1,R1] = qrinsert(Q,R,j,x,'row')` returns the QR factorization of the matrix `A1`, where `A1` is `A = Q*R` with an extra row, `x`, inserted before `A(j,:)`.

Examples

```
A = magic(5);
[Q,R] = qr(A);
j = 3;
x = 1:5;
[Q1,R1] = qrinsert(Q,R,j,x,'row')

Q1 =
    0.5231    0.5039   -0.6750    0.1205    0.0411    0.0225
    0.7078   -0.6966    0.0190   -0.0788    0.0833   -0.0150
    0.0308    0.0592    0.0656    0.1169    0.1527   -0.9769
    0.1231    0.1363    0.3542    0.6222    0.6398    0.2104
    0.3077    0.1902    0.4100    0.4161   -0.7264   -0.0150
    0.3385    0.4500    0.4961   -0.6366    0.1761    0.0225

R1 =
   32.4962   26.6801   21.4795   23.8182   26.0031
```

```
         0   19.9292   12.4403    2.1340    4.3271
         0         0   24.4514   11.8132    3.9931
         0         0         0   20.2382   10.3392
         0         0         0         0   16.1948
         0         0         0         0         0
```

returns a valid QR factorization, although possibly different from

```
A2 = [A(1:j-1,:); x; A(j:end,:)];
[Q2,R2] = qr(A2)

Q2 =
   -0.5231    0.5039    0.6750   -0.1205    0.0411    0.0225
   -0.7078   -0.6966   -0.0190    0.0788    0.0833   -0.0150
   -0.0308    0.0592   -0.0656   -0.1169    0.1527   -0.9769
   -0.1231    0.1363   -0.3542   -0.6222    0.6398    0.2104
   -0.3077    0.1902   -0.4100   -0.4161   -0.7264   -0.0150
   -0.3385    0.4500   -0.4961    0.6366    0.1761    0.0225

R2 =
  -32.4962  -26.6801  -21.4795  -23.8182  -26.0031
         0   19.9292   12.4403    2.1340    4.3271
         0         0  -24.4514  -11.8132   -3.9931
         0         0         0  -20.2382  -10.3392
         0         0         0         0   16.1948
         0         0         0         0         0
```

Algorithms

The `qrinsert` function inserts the values of `x` into the `j`th column (row) of `R`. It then uses a series of Givens rotations to zero out the nonzero elements of `R` on and below the diagonal in the `j`th column (row). [1]

References

[1] Golub, Gene H., and Charles F. Van Loan. *Matrix Computations*. 4th ed. Baltimore, MD: Johns Hopkins University Press, 2013, Sections 6.5.2–6.5.3, pp. 335–338.

See Also

`planerot` | `qr` | `qrdelete`

Introduced before R2006a

qrupdate

Rank 1 update to QR factorization

Syntax

```
[Q1,R1] = qrupdate(Q,R,u,v)
```

Description

`[Q1,R1] = qrupdate(Q,R,u,v)` when `[Q,R] = qr(A)` is the original QR factorization of `A`, returns the QR factorization of `A + u*v'`, where `u` and `v` are column vectors of appropriate lengths.

Examples

The matrix

```
mu = sqrt(eps)

mu =

   1.4901e-08

A = [ones(1,4); mu*eye(4)];
```

is a well-known example in least squares that indicates the dangers of forming `A'*A`. Instead, we work with the QR factorization – orthonormal Q and upper triangular R.

```
 [Q,R] = qr(A);
```

As we expect, `R` is upper triangular.

```
R =

   -1.0000   -1.0000   -1.0000   -1.0000
         0    0.0000    0.0000    0.0000
         0         0    0.0000    0.0000
```

```
         0         0         0    0.0000
         0         0         0         0
```

In this case, the upper triangular entries of R, excluding the first row, are on the order of `sqrt(eps)`.

Consider the update vectors

```
 u = [-1 0 0 0 0]'; v = ones(4,1);
```

Instead of computing the rather trivial QR factorization of this rank one update to A from scratch with

```
[QT,RT] = qr(A + u*v')

QT =

     0     0     0     0     1
    -1     0     0     0     0
     0    -1     0     0     0
     0     0    -1     0     0
     0     0     0    -1     0

RT =

  1.0e-007 *

   -0.1490         0         0         0
         0   -0.1490         0         0
         0         0   -0.1490         0
         0         0         0   -0.1490
         0         0         0         0
```

we may use `qrupdate`.

```
[Q1,R1] = qrupdate(Q,R,u,v)

Q1 =

   -0.0000   -0.0000   -0.0000   -0.0000    1.0000
    1.0000   -0.0000   -0.0000   -0.0000    0.0000
    0.0000    1.0000   -0.0000   -0.0000    0.0000
    0.0000    0.0000    1.0000   -0.0000    0.0000
   -0.0000   -0.0000   -0.0000    1.0000    0.0000
```

```
R1 =

   1.0e-007 *
    0.1490    0.0000    0.0000    0.0000
         0    0.1490    0.0000    0.0000
         0         0    0.1490    0.0000
         0         0         0    0.1490
         0         0         0         0
```

Note that both factorizations are correct, even though they are different.

Tips

`qrupdate` works only for full matrices.

Algorithms

`qrupdate` uses the algorithm in section 12.5.1 of the third edition of *Matrix Computations* by Golub and van Loan. `qrupdate` is useful since, if we take `N = max(m,n)`, then computing the new QR factorization from scratch is roughly an $O(N^3)$ algorithm, while simply updating the existing factors in this way is an $O(N^2)$ algorithm.

References

[1] Golub, Gene H. and Charles Van Loan, *Matrix Computations*, Third Edition, Johns Hopkins University Press, Baltimore, 1996

See Also

`cholupdate` | `qr`

Introduced before R2006a

quad

Numerically evaluate integral, adaptive Simpson quadrature

Compatibility

`quad` will be removed in a future release. Use `integral` instead.

Syntax

```
q = quad(fun,a,b)
q = quad(fun,a,b,tol)
q = quad(fun,a,b,tol,trace)
[q,fcnt] = quad(...)
```

Description

Quadrature is a numerical method used to find the area under the graph of a function, that is, to compute a definite integral.

$$q = \int_a^b f(x)dx$$

`q = quad(fun,a,b)` tries to approximate the integral of function `fun` from `a` to `b` to within an error of `1e-6` using recursive adaptive Simpson quadrature. `fun` is a function handle. Limits `a` and `b` must be finite. The function `y = fun(x)` should accept a vector argument `x` and return a vector result `y`, the integrand evaluated at each element of `x`.

"Parameterizing Functions" explains how to provide additional parameters to the function `fun`, if necessary.

`q = quad(fun,a,b,tol)` uses an absolute error tolerance `tol` instead of the default which is `1.0e-6`. Larger values of `tol` result in fewer function evaluations and faster computation, but less accurate results. In MATLAB version 5.3 and earlier, the `quad` function used a less reliable algorithm and a default relative tolerance of `1.0e-3`.

`q = quad(fun,a,b,tol,trace)` with non-zero `trace` shows the values of `[fcnt a b-a Q]` during the recursion.

`[q,fcnt] = quad(...)` returns the number of function evaluations.

The function `quadl` may be more efficient with high accuracies and smooth integrands.

The list below contains information to help you determine which quadrature function in MATLAB to use:

- The `quad` function may be most efficient for low accuracies with nonsmooth integrands.
- The `quadl` function may be more efficient than `quad` at higher accuracies with smooth integrands.
- The `quadgk` function may be most efficient for high accuracies and oscillatory integrands. It supports infinite intervals and can handle moderate singularities at the endpoints. It also supports contour integration along piecewise linear paths.
- The `quadv` function vectorizes `quad` for an array-valued `fun`.
- If the interval is infinite, $[a,\infty)$, then for the integral of `fun(x)` to exist, `fun(x)` must decay as `x` approaches infinity, and `quadgk` requires it to decay rapidly. Special methods should be used for oscillatory functions on infinite intervals, but `quadgk` can be used if `fun(x)` decays fast enough.
- The `quadgk` function will integrate functions that are singular at finite endpoints if the singularities are not too strong. For example, it will integrate functions that behave at an endpoint `c` like `log|x-c|` or $|x-c|^p$ for `p >= -1/2`. If the function is singular at points inside `(a,b)`, write the integral as a sum of integrals over subintervals with the singular points as endpoints, compute them with `quadgk`, and add the results.

Examples

To compute the integral

$$\int_0^2 \frac{1}{x^3 - 2x - 5} dx,$$

write a function `myfun` that computes the integrand:

```
function y = myfun(x)
y = 1./(x.^3-2*x-5);
```

Then pass `@myfun`, a function handle to `myfun`, to `quad`, along with the limits of integration, `0` to `2`:

```
Q = quad(@myfun,0,2)

Q =

   -0.4605
```

Alternatively, you can pass the integrand to `quad` as an anonymous function handle `F`:

```
F = @(x)1./(x.^3-2*x-5);
Q = quad(F,0,2);
```

Diagnostics

`quad` may issue one of the following warnings:

`'Minimum step size reached'` indicates that the recursive interval subdivision has produced a subinterval whose length is on the order of roundoff error in the length of the original interval. A nonintegrable singularity is possible.

`'Maximum function count exceeded'` indicates that the integrand has been evaluated more than 10,000 times. A nonintegrable singularity is likely.

`'Infinite or Not-a-Number function value encountered'` indicates a floating point overflow or division by zero during the evaluation of the integrand in the interior of the interval.

Algorithms

`quad` implements a low order method using an adaptive recursive Simpson's rule.

References

[1] Gander, W. and W. Gautschi, "Adaptive Quadrature – Revisited," BIT, Vol. 40, 2000, pp. 84-101. This document is also available at http://www.inf.ethz.ch/personal/gander.

See Also

See Also

`dblquad` | `integral` | `integral2` | `integral3` | `quad2d` | `quadgk` | `quadl` | `quadv` | `trapz` | `triplequad`

Topics

"Anonymous Functions"
"Create Function Handle"

Introduced before R2006a

quad2d

Numerically evaluate double integral, tiled method

Syntax

```
q = quad2d(fun,a,b,c,d)
[q,errbnd] = quad2d(...)
q = quad2d(fun,a,b,c,d,param1,val1,param2,val2,...)
```

Description

`q = quad2d(fun,a,b,c,d)` approximates the integral of `fun(x,y)` over the planar region $a \le x \le b$ and $c(x) \le y \le d(x)$. `fun` is a function handle, `c` and `d` may each be a scalar or a function handle.

All input functions must be vectorized. The function `Z=fun(X,Y)` must accept 2-D matrices `X` and `Y` of the same size and return a matrix `Z` of corresponding values. The functions `ymin=c(X)` and `ymax=d(X)` must accept matrices and return matrices of the same size with corresponding values.

`[q,errbnd] = quad2d(...)`. `errbnd` is an approximate upper bound on the absolute error, `|Q - I|`, where `I` denotes the exact value of the integral.

`q = quad2d(fun,a,b,c,d,param1,val1,param2,val2,...)` performs the integration as above with specified values of optional parameters:

`AbsTol`	absolute error tolerance
`RelTol`	relative error tolerance

`quad2d` attempts to satisfy `ERRBND <= max(AbsTol,RelTol*|Q|)`. This is absolute error control when `|Q|` is sufficiently small and relative error control when `|Q|` is larger. A default tolerance value is used when a tolerance is not specified. The default value of `AbsTol` is 1e-5. The default value of `RelTol` is `100*eps(class(Q))`. This is also the minimum value of `RelTol`. Smaller `RelTol` values are automatically increased to the default value.

`MaxFunEvals`	Maximum allowed number of evaluations of `fun` reached.

The `MaxFunEvals` parameter limits the number of vectorized calls to `fun`. The default is 2000.

`FailurePlot`	Generate a plot if `MaxFunEvals` is reached.

Setting `FailurePlot` to `true` generates a graphical representation of the regions needing further refinement when `MaxFunEvals` is reached. No plot is generated if the integration succeeds before reaching `MaxFunEvals`. These (generally) 4-sided regions are mapped to rectangles internally. Clusters of small regions indicate the areas of difficulty. The default is `false`.

`Singular`	Problem may have boundary singularities

With `Singular` set to `true`, `quad2d` will employ transformations to weaken boundary singularities for better performance. The default is `true`. Setting `Singular` to `false` will turn these transformations off, which may provide a performance benefit on some smooth problems.

Examples

Evaluate Double Integral

Integrate

$$y \sin(x) + x \cos(y)$$

over $-\pi \le x \le 2\pi$ and $0 \le y \le \pi$.

```
fun = @(x,y) y.*sin(x)+x.*cos(y);
Q = quad2d(fun,pi,2*pi,0,pi)
```

```
Q = -9.8696
```

Compare the result to the true value of the integral, $-\pi^2$.

```
-pi^2
```

```
ans = -9.8696
```

Integrand with Singularity on Integration Boundary

Integrate the function

$$\left[(x+y)^{1/2}(1+x+y)^2\right]^{-1}$$

over the region $0 \le x \le 1$ and $0 \le y \le 1 - x$. This integrand is infinite at the origin (0,0), which lies on the boundary of the integration region.

```
fun = @(x,y) 1./(sqrt(x + y) .* (1 + x + y).^2 );
ymax = @(x) 1 - x;
Q = quad2d(fun,0,1,0,ymax)
```

```
Q = 0.2854
```

The true value of the integral is $\pi/4 - 1/2$.

```
pi/4 - 0.5
```

```
ans = 0.2854
```

Limitations of quad2d

`quad2d` begins by mapping the region of integration to a rectangle. Consequently, it may have trouble integrating over a region that does not have four sides or has a side that cannot be mapped smoothly to a straight line. If the integration is unsuccessful, some helpful tactics are leaving `Singular` set to its default value of `true`, changing between Cartesian and polar coordinates, or breaking the region of integration into pieces and adding the results of integration over the pieces.

For instance:

```
fun = @(x,y)abs(x.^2 + y.^2 - 0.25);
c = @(x)-sqrt(1 - x.^2);
d = @(x)sqrt(1 - x.^2);
quad2d(fun,-1,1,c,d,'AbsTol',1e-8,...
```

```
    'FailurePlot',true,'Singular',false);
```

```
Warning: Reached the maximum number of function evaluations (2000). The result fails th
```

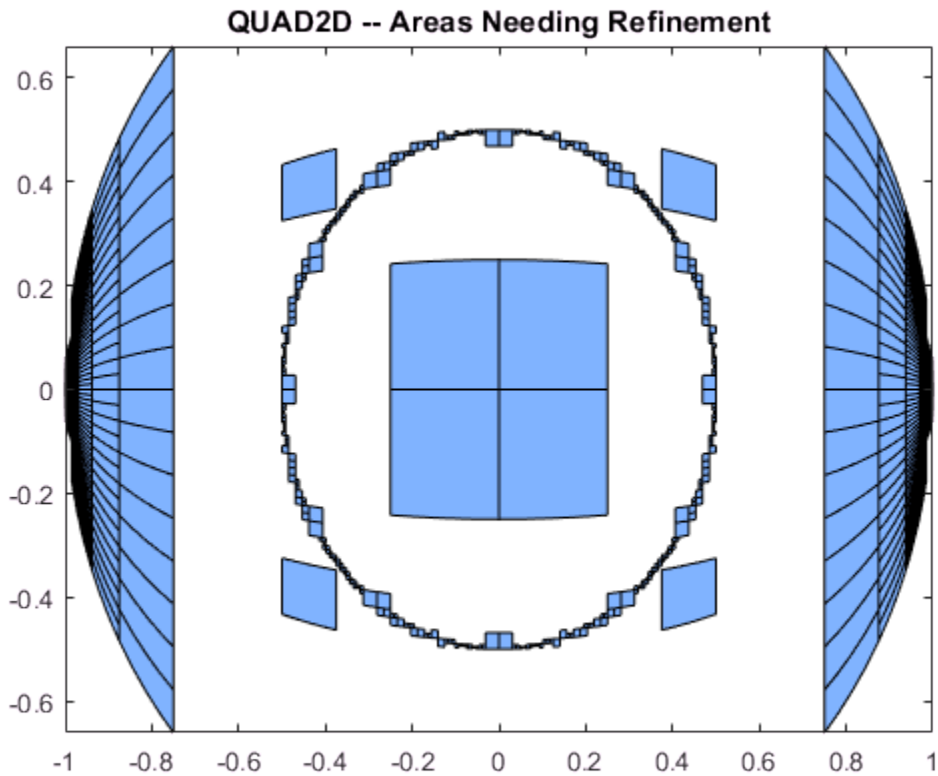

The failure plot shows two areas of difficulty, near the points `(-1,0)` and `(1,0)` and near the circle $x^2 + y^2 = 0.25$.

Changing the value of `Singular` to `true` will cope with the geometric singularities at `(-1,0)` and `(1,0)`. The larger shaded areas may need refinement but are probably not areas of difficulty.

```
Q = quad2d(fun,-1,1,c,d,'AbsTol',1e-8, ...
     'FailurePlot',true,'Singular',true);
```

```
Warning: Reached the maximum number of function evaluations (2000). The result passes t
```

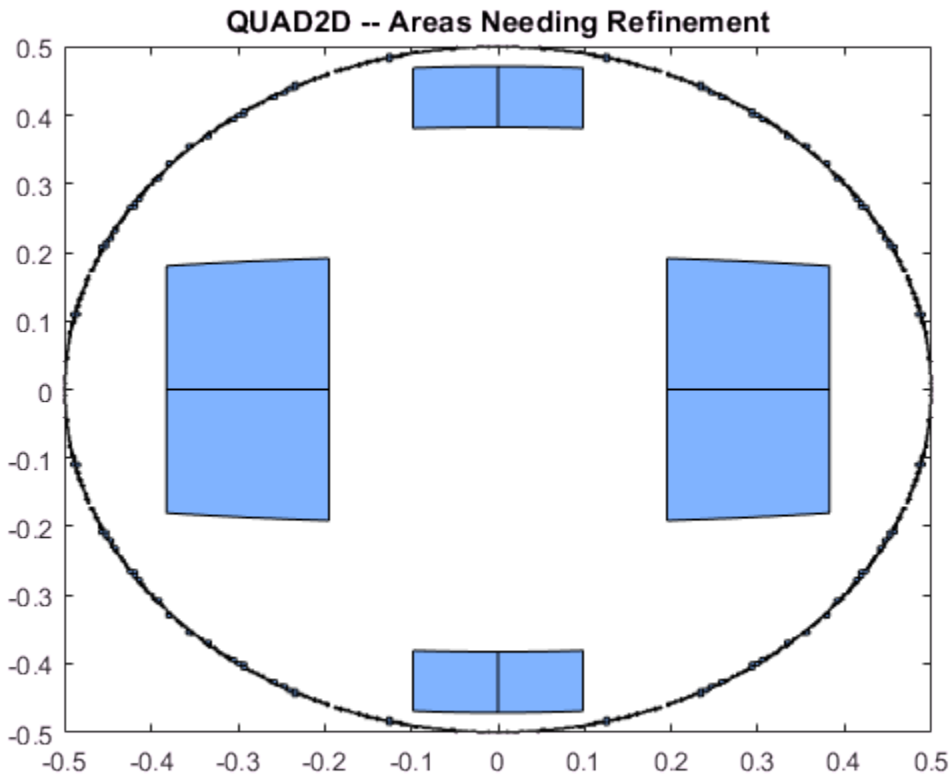

From here you can take advantage of symmetry:

```
Q = 4*quad2d(fun,0,1,0,d,'Abstol',1e-8,...
     'Singular',true,'FailurePlot',true)
```

```
Q = 0.9817
```

However, the code is still working very hard near the singularity. It may not be able to provide higher accuracy:

```
Q = 4*quad2d(fun,0,1,0,d,'Abstol',1e-10,...
     'Singular',true,'FailurePlot',true);
```

```
Warning: Reached the maximum number of function evaluations (2000). The result passes t
```

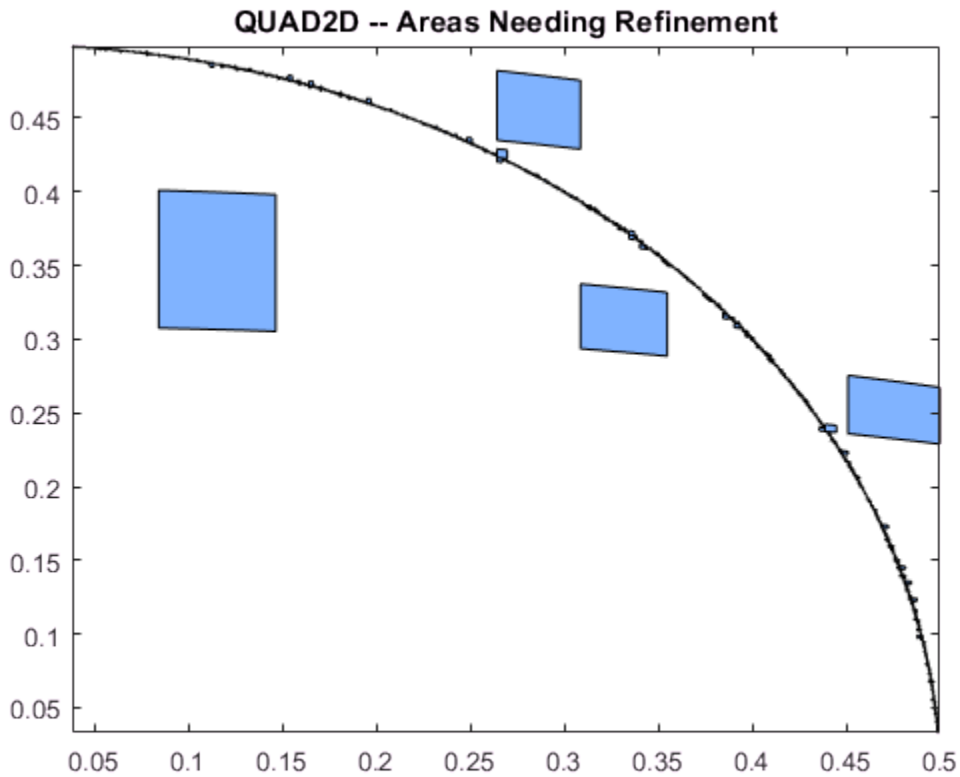

At higher accuracy, a change in coordinates may work better.

```
polarfun = @(theta,r) fun(r.*cos(theta),r.*sin(theta)).*r;
Q = 4*quad2d(polarfun,0,pi/2,0,1,'AbsTol',1e-10);
```

It is best to put the singularity on the boundary by splitting the region of integration into two parts:

```
Q1 = 4*quad2d(polarfun,0,pi/2,0,0.5,'AbsTol',5e-11);
Q2 = 4*quad2d(polarfun,0,pi/2,0.5,1,'AbsTol',5e-11);
Q = Q1 + Q2;
```

References

[1] L.F. Shampine, "Matlab Program for Quadrature in 2D." *Applied Mathematics and Computation*. Vol. 202, Issue 1, 2008, pp. 266–274.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generated code issues a warning if the size of the internal storage arrays is not large enough. If a warning occurs, as a workaround, you can try to divide the region of integration into pieces and sum the integrals over each piece.

See Also

See Also

`integral` | `integral2` | `integral3` | `quadgk`

Topics

"Anonymous Functions"
"Create Function Handle"

quadgk

Numerically evaluate integral, adaptive Gauss-Kronrod quadrature

Syntax

```
q = quadgk(fun,a,b)
[q,errbnd] = quadgk(fun,a,b)
[q,errbnd] = quadgk(fun,a,b,param1,val1,param2,val2,...)
```

Description

`q = quadgk(fun,a,b)` attempts to approximate the integral of a scalar-valued function `fun` from `a` to `b` using high-order global adaptive quadrature and default error tolerances. The function `y = fun(x)` should accept a vector argument `x` and return a vector result `y`, where `y` is the integrand evaluated at each element of `x`. `fun` must be a function handle. Limits `a` and `b` can be `-Inf` or `Inf`. If both are finite, they can be complex. If at least one is complex, the integral is approximated over a straight line path from `a` to `b` in the complex plane.

"Parameterizing Functions" explains how to provide additional parameters to the function `fun`, if necessary.

`[q,errbnd] = quadgk(fun,a,b)` returns an approximate upper bound on the absolute error, `|Q - I|`, where `I` denotes the exact value of the integral.

`[q,errbnd] = quadgk(fun,a,b,param1,val1,param2,val2,...)` performs the integration with specified values of optional parameters. The available parameters are

Parameter	Description	
`'AbsTol'`	Absolute error tolerance. The default value of `'AbsTol'` is `1.e-10` (double), `1.e-5` (single).	`quadgk` attempts to satisfy `errbnd <= max(AbsTol,RelTol*|Q|)`. This is absolute error control when `|Q|` is sufficiently small and relative error control when `|Q|` is larger. For pure absolute error control use `'AbsTol' > 0` and `'RelTol'=`
`'RelTol'`	Relative error tolerance.	

Parameter	Description	
	The default value of `'RelTol'` is `1.e-6` (double), `1.e-4` (single).	`0`. For pure relative error control use `'AbsTol' = 0`. Except when using pure absolute error control, the minimum relative tolerance is `'RelTol' >= 100*eps(class(Q))`.
`'Waypoints'`	Vector of integration waypoints.	If `fun(x)` has discontinuities in the interval of integration, the locations should be supplied as a `Waypoints` vector. When `a`, `b`, and the waypoints are all real, only the waypoints between `a` and `b` are used, and they are used in sorted order. Note that waypoints are not intended for singularities in `fun(x)`. Singular points should be handled by making them endpoints of separate integrations and adding the results. If `a`, `b`, or any entry of the waypoints vector is complex, the integration is performed over a sequence of straight line paths in the complex plane, from `a` to the first waypoint, from the first waypoint to the second, and so forth, and finally from the last waypoint to `b`.

Parameter	Description	
`'MaxIntervalCount'`	Maximum number of intervals allowed. The default value is `650`.	The `'MaxIntervalCount'` parameter limits the number of intervals that `quadgk` uses at any one time after the first iteration. A warning is issued if `quadgk` returns early because of this limit. Routinely increasing this value is not recommended, but it may be appropriate when `errbnd` is small enough that the desired accuracy has nearly been achieved.

Examples

Integrand with a singularity at an integration end point

Write a function `myfun` that computes the integrand:

```
function y = myfun(x)
y = exp(x).*log(x);
```

Then pass `@myfun`, a function handle to `myfun`, to `quadgk`, along with the limits of integration, `0` to `1`:

```
q = quadgk(@myfun,0,1)

q =

   -1.3179
```

Alternatively, you can pass the integrand to `quadgk` as an anonymous function handle `F`:

```
f = (@(x)exp(x).*log(x));
q = quadgk(f,0,1);
```

Oscillatory integrand on a semi-infinite interval

Integrate over a semi-infinite interval with specified tolerances, and return the approximate error bound:

```
f = @(x)x.^5.*exp(-x).*sin(x);
[q,errbnd] = quadgk(f,0,inf,'RelTol',1e-8,'AbsTol',1e-12)

q =

  -15.0000

errbnd =

  9.4386e-009
```

Contour integration around a pole

Use `Waypoints` to integrate around a pole using a piecewise linear contour:

```
f = @(z)1./(2*z - 1);
q = quadgk(f,-1-i,-1-i,'Waypoints',[1-i,1+i,-1+i])

q =

   0.0000 + 3.1416i
```

Diagnostics

`quadgk` may issue one of the following warnings:

`'Minimum step size reached'` indicates that interval subdivision has produced a subinterval whose length is on the order of roundoff error in the length of the original interval. A nonintegrable singularity is possible.

`'Reached the limit on the maximum number of intervals in use'` indicates that the integration was terminated before meeting the tolerance requirements and that continuing the integration would require more than `MaxIntervalCount` subintervals. The integral may not exist, or it may be difficult to approximate numerically. Increasing `MaxIntervalCount` usually does not help unless the tolerance requirements were nearly met when the integration was previously terminated.

`'Infinite or Not-a-Number function value encountered'` indicates a floating point overflow or division by zero during the evaluation of the integrand in the interior of the interval.

Tips

- If the interval is infinite, $[a,\infty)$, then for the integral of `fun(x)` to exist, `fun(x)` must decay as `x` approaches infinity, and `quadgk` requires it to decay rapidly. Special methods should be used for oscillatory functions on infinite intervals, but `quadgk` can be used if `fun(x)` decays fast enough.
- The `quadgk` function can integrate functions that are singular at finite endpoints if the singularities are not too strong. For example, it can integrate functions that behave at an endpoint `c` like `log|x-c|` or $|x-c|^p$ for `p >= -1/2`. If the function is singular at points inside `(a,b)`, write the integral as a sum of integrals over subintervals with the singular points as endpoints, compute them with `quadgk`, and add the results.

Algorithms

`quadgk` implements adaptive quadrature based on a Gauss-Kronrod pair (15th and 7th order formulas).

References

[1] L.F. Shampine "*Vectorized Adaptive Quadrature in MATLAB*," *Journal of Computational and Applied Mathematics*, 211, 2008, pp.131–140.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`integral` | `integral2` | `integral3` | `quad2d`

Topics

"Anonymous Functions"
"Create Function Handle"

quadl

Numerically evaluate integral, adaptive Lobatto quadrature

Compatibility

`quadl` will be removed in a future release. Use `integral` instead.

Syntax

```
q = quadl(fun,a,b)
q = quadl(fun,a,b,tol)
quadl(fun,a,b,tol,trace)
[q,fcnt] = quadl(...)
```

Description

`q = quadl(fun,a,b)` approximates the integral of function `fun` from `a` to `b`, to within an error of 10^{-6} using recursive adaptive Lobatto quadrature. `fun` is a function handle. It accepts a vector `x` and returns a vector `y`, the function `fun` evaluated at each element of `x`. Limits `a` and `b` must be finite.

"Parameterizing Functions" explains how to provide additional parameters to the function `fun`, if necessary.

`q = quadl(fun,a,b,tol)` uses an absolute error tolerance of `tol` instead of the default, which is `1.0e-6`. Larger values of `tol` result in fewer function evaluations and faster computation, but less accurate results.

`quadl(fun,a,b,tol,trace)` with non-zero `trace` shows the values of `[fcnt a b-a q]` during the recursion.

`[q,fcnt] = quadl(...)` returns the number of function evaluations.

Use array operators `.*`, `./` and `.^` in the definition of `fun` so that it can be evaluated with a vector argument.

The function quad might be more efficient with low accuracies or nonsmooth integrands.

The list below contains information to help you determine which quadrature function in MATLAB to use:

- The quad function might be most efficient for low accuracies with nonsmooth integrands.
- The quadl function might be more efficient than quad at higher accuracies with smooth integrands.
- The quadgk function might be most efficient for high accuracies and oscillatory integrands. It supports infinite intervals and can handle moderate singularities at the endpoints. It also supports contour integration along piecewise linear paths.
- The quadv function vectorizes quad for an array-valued fun.
- If the interval is infinite, $[a,\infty)$, then for the integral of fun(x) to exist, fun(x) must decay as x approaches infinity, and quadgk requires it to decay rapidly. Special methods should be used for oscillatory functions on infinite intervals, but quadgk can be used if fun(x) decays fast enough.
- The quadgk function will integrate functions that are singular at finite endpoints if the singularities are not too strong. For example, it will integrate functions that behave at an endpoint c like log|x-c| or $|x-c|^p$ for p >= -1/2. If the function is singular at points inside (a,b), write the integral as a sum of integrals over subintervals with the singular points as endpoints, compute them with quadgk, and add the results.

Examples

Pass the function handle, @myfun, to quadl:

```
Q = quadl(@myfun,0,2);
```

where the function myfun.m is:

```
function y = myfun(x)
y = 1./(x.^3-2*x-5);
```

Pass anonymous function handle F to quadl:

```
F = @(x) 1./(x.^3-2*x-5);
Q = quadl(F,0,2);
```

Diagnostics

`quadl` might issue one of the following warnings:

`'Minimum step size reached'` indicates that the recursive interval subdivision has produced a subinterval whose length is on the order of roundoff error in the length of the original interval. A nonintegrable singularity is possible.

`'Maximum function count exceeded'` indicates that the integrand has been evaluated more than 10,000 times. A nonintegrable singularity is likely.

`'Infinite or Not-a-Number function value encountered'` indicates a floating point overflow or division by zero during the evaluation of the integrand in the interior of the interval.

Algorithms

`quadl` implements a high order method using an adaptive Gauss/Lobatto quadrature rule.

References

[1] Gander, W. and W. Gautschi, “Adaptive Quadrature – Revisited,” BIT, Vol.40, 2000, pp. 84-101. This document is also available at http://www.inf.ethz.ch/personal/gander.

See Also

See Also

`dblquad` | `integral` | `integral2` | `integral3` | `quad` | `quad2d` | `quadgk` | `triplequad`

Topics

“Anonymous Functions”

"Create Function Handle"

Introduced before R2006a

quadv

Vectorized quadrature

Compatibility

`quadv` will be removed in a future release. Use `integral` with the `'ArrayValued'` option instead.

Syntax

```
Q = quadv(fun,a,b)
Q = quadv(fun,a,b,tol)
Q = quadv(fun,a,b,tol,trace)
[Q,fcnt] = quadv(...)
```

Description

`Q = quadv(fun,a,b)` approximates the integral of the complex array-valued function `fun` from `a` to `b` to within an error of `1.e-6` using recursive adaptive Simpson quadrature. `fun` is a function handle. The function `Y = fun(x)` should accept a scalar argument `x` and return an array result `Y`, whose components are the integrands evaluated at `x`. Limits `a` and `b` must be finite.

"Parameterizing Functions" explains how to provide addition parameters to the function `fun`, if necessary.

`Q = quadv(fun,a,b,tol)` uses the absolute error tolerance `tol` for all the integrals instead of the default, which is `1.e-6`.

Note The same tolerance is used for all components, so the results obtained with `quadv` are usually not the same as those obtained with `quad` on the individual components.

`Q = quadv(fun,a,b,tol,trace)` with non-zero `trace` shows the values of `[fcnt a b-a Q(1)]` during the recursion.

`[Q,fcnt] = quadv(...)` returns the number of function evaluations.

The list below contains information to help you determine which quadrature function in MATLAB to use:

- The `quad` function might be most efficient for low accuracies with nonsmooth integrands.
- The `quadl` function might be more efficient than `quad` at higher accuracies with smooth integrands.
- The `quadgk` function might be most efficient for high accuracies and oscillatory integrands. It supports infinite intervals and can handle moderate singularities at the endpoints. It also supports contour integration along piecewise linear paths.
- The `quadv` function vectorizes `quad` for an array-valued `fun`.
- If the interval is infinite, $[a,\infty)$, then for the integral of `fun(x)` to exist, `fun(x)` must decay as `x` approaches infinity, and `quadgk` requires it to decay rapidly. Special methods should be used for oscillatory functions on infinite intervals, but `quadgk` can be used if `fun(x)` decays fast enough.
- The `quadgk` function will integrate functions that are singular at finite endpoints if the singularities are not too strong. For example, it will integrate functions that behave at an endpoint `c` like `log|x-c|` or $|x-c|^p$ for `p >= -1/2`. If the function is singular at points inside `(a,b)`, write the integral as a sum of integrals over subintervals with the singular points as endpoints, compute them with `quadgk`, and add the results.

Examples

For the parameterized array-valued function `myarrayfun`, defined by

```
function Y = myarrayfun(x,n)
Y = 1./((1:n)+x);
```

the following command integrates `myarrayfun`, for the parameter value n = 10 between a = 0 and b = 1:

```
Qv = quadv(@(x)myarrayfun(x,10),0,1);
```

The resulting array `Qv` has 10 elements estimating `Q(k) = log((k+1)./(k))`, for `k = 1:10`.

The entries in `Qv` are slightly different than if you compute the integrals using `quad` in a loop:

```
for k = 1:10
 Qs(k) = quadv(@(x)myscalarfun(x,k),0,1);
end
```

where `myscalarfun` is:

```
function y = myscalarfun(x,k)
y = 1./(k+x);
```

See Also

See Also

`dblquad` | `integral` | `integral2` | `integral3` | `quad` | `quad2d` | `quadgk` | `quadl` | `triplequad`

Topics

"Create Function Handle"

Introduced before R2006a

matlab.unittest.qualifications

Summary of classes in MATLAB Qualifications Interface

Description

Qualifications are methods for testing values and responding to failures. Qualification failures might or might not correspond to a test failure, and they might or might not continue execution in the test when one is encountered. To determine which qualification to use, see "Types of Qualifications".

matlab.unittest.qualifications.Assertable	Qualification to validate preconditions of a test
matlab.unittest.qualifications.Assumable	Qualification to filter test content
matlab.unittest.qualifications.FatalAssertable	Qualification to abort test execution
matlab.unittest.qualifications.Verifiable	Qualification to produce soft failure conditions

The package contains the following event data classes:

matlab.unittest.qualifications.ExceptionEventData	Event data for ExceptionThrown event listeners
matlab.unittest.qualifications.QualificationEventData	Event data for qualification event listeners

The package contains the following exception handling classes:

matlab.unittest.qualifications.AssertionFailedException	Exception used for assertion failures

matlab.unittest.qualifications.AssumptionFailedException
Exception used for assumption failures

matlab.unittest.qualifications.FatalAssertionFailedException
Exception used for fatal assertion failures

matlab.unittest.qualifications.Assertable class

Package: matlab.unittest.qualifications

Qualification to validate preconditions of a test

Description

The `Assertable` class provides a qualification to validate preconditions of a test. Apart from actions performed for failures, the `Assertable` class works the same as other `matlab.unittest` qualifications.

Upon an assertion failure, the `Assertable` class throws an `AssertionFailedException` to inform the testing framework of the failure. This is most useful when a failure at the assertion point renders the rest of the current test method invalid, yet does not prevent proper execution of other test methods. Often, you use assertions to ensure that preconditions of the current test are not violated or that fixtures are set up correctly. Make sure the test content is "Exception Safe" on page 1-9089. If you cannot make the fixture teardown exception safe or if you cannot recover it after failure, use fatal assertions instead.

Use assertions to allow remaining test methods to receive coverage when preconditions are violated in a test and all fixture states are restorable. Assertions also reduce the noise level of failures by not performing later verifications that fail due the precondition failures. In the event of a failure, however, the test framework marks the full content of the test method that failed as incomplete. Therefore, if the failure does not affect the preconditions of the test or cause problems with fixture setup or teardown, use verifications, which give the added information that the full test content was run.

Methods

assertClass	Assert exact class of specified value
assertEmpty	Assert value is empty
assertEqual	Assert value is equal to specified value
assertError	Assert function throws specified exception
assertFail	Produce unconditional assertion failure

assertFalse	Assert value is false
assertGreaterThan	Assert value is greater than specified value
assertGreaterThanOrEqual	Assert value is greater than or equal to specified value
assertInstanceOf	Assert value is object of specified type
assertLength	Assert value has specified length
assertLessThan	Assert value is less than specified value
assertLessThanOrEqual	Assert value is less than or equal to specified value
assertMatches	Assert string matches specified regular expression
assertNotEmpty	Assert value is not empty
assertNotEqual	Assert value is not equal to specified value
assertNotSameHandle	Assert value is not handle to specified instance
assertNumElements	Assert value has specified element count
assertReturnsTrue	Assert function returns true when evaluated
assertSameHandle	Assert two values are handles to same instance
assertSize	Assert value has specified size
assertSubstring	Assert string contains specified string
assertThat	Assert that value meets specified constraint
assertTrue	Assert value is true
assertWarning	Assert function issues specified warning
assertWarningFree	Assert function issues no warnings

Events

`AssertionFailed`	Triggered upon failing assertion. A `QualificationEventData` object is passed to listener callback functions.

`AssertionPassed`	Triggered upon passing assertion. A `QualificationEventData` object is passed to listener callback functions.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Test for Preconditions Using Assertions

Use assertable qualifications to test for preconditions. This example will create a test case to write a polynomial to a MAT-file.

Create `DocPolynomSaveLoadTest` Test Case. Refer to the following `DocPolynomSaveLoadTest` test case in the subsequent steps in this example. The steps highlight specific code in the `testSaveLoad` function; the code statements are not intended to be executed outside the context of the class definition file.

DocPolynomSaveLoadTest Class Definition File

```
classdef DocPolynomSaveLoadTest < matlab.unittest.TestCase

    methods (TestClassSetup)
        function addDocPolynomClassToPath(testCase)
            origPath = path;
            testCase.addTeardown(@path, origPath);
            addpath(fullfile(matlabroot, ...
                'help', 'techdoc', 'matlab_oop', 'examples'));
        end
    end

    methods (Test)
        function testSaveLoad(testCase)

            import matlab.unittest.diagnostics.Diagnostic;

            %% Phase 1: Setup
            % Create a temporary working folder
```

```
        tempFolder = tempname;
        [success, message] = mkdir(tempFolder);
        testCase.assertTrue(success, ...
            Diagnostic.join('Could not create temporary folder.',...
            message));
        testCase.addTeardown(@() testCase.cleanUpTemporaryFolder(...
            tempFolder));

        % Change to the temporay folder and register the
        % teardown, which restores the original folder
        origFolder = pwd;
        testCase.addTeardown(@cd, origFolder);
        cd(tempFolder);

        %% Phase 2: Exercise
        % Save the instance to a mat file.
        p = DocPolynom([1, 0, 1]);
        save('DocPolynomFile', 'p');

        % Validate Precondition. Save resulted in valid .mat file
        testCase.assertEqual(exist('DocPolynomFile.mat','file'),...
            2, Diagnostic.join(...
            'mat file was not saved correctly.',@() dir(pwd)));

        loaded = load('DocPolynomFile');


        %% Phase 3: Verify
        testCase.verifyEqual(loaded.p, p,...
            'Loaded polynom did not equal original polynom.');


        %% Phase 4: Teardown
        % Done inline via calls to addTeardown at the points
        % at which the state was changed.


    end
end

methods(Access=private)
    function cleanUpTemporaryFolder(testCase,tempFolder)
        % Clean up the temporary folder and fatally assert
        % that it was correctly cleaned up.
```

```
            import matlab.unittest.diagnostics.Diagnostic;

            [success, message] = rmdir(tempFolder, 's');
            testCase.fatalAssertTrue(success, ...
                Diagnostic.join('Could not remove temporary folder.',...
                message));
        end
    end

end
```

To execute the MATLAB commands in “Run DocPolynomSaveLoadTest Test Case”, add the `DocPolynomSaveLoadTest.m` file to a folder on your MATLAB path.

The `testSaveLoad` function consists of the following phases:

- Phase 1: Setup — Create and verify precondition code.
- Phase 2: Exercise — Create a `DocPolynom` object and save it to a MAT-file.
- Phase 3: Verify — Test that object was successfully saved.
- Phase 4: Teardown — Execute teardown code.

Define phase 1 precondition. For this test, use a temporary folder for creating a `DocPolynom` object. The precondition for continuing with this test is that the following commands execute successfully.

```
tempFolder = tempname;
[success, message] = mkdir(tempFolder);
```

Test the results of the `mkdir` function. Use the `assertTrue` method to test the `mkdir` `success` argument for errors. If an assertion occurs, the remainder of the `testSaveLoad` test method is invalid, and the test is marked `Incomplete`.

```
testCase.assertTrue(success, ...
    Diagnostic.join('Could not create the temporary folder.', ...
        message))
```

If the `mkdir` function fails, MATLAB displays the diagnostic message, `Could not create the temporary folder`, as well as the contents of the `mkdir` `message` argument.

Add teardown fixture code. Creating a temporary folder is setup code, which requires a corresponding call to the `rmdir` function to restore MATLAB to the original state. Use

the `addTeardown` method to ensure the teardown code executes even when an exception is thrown in the middle of the test method. This makes the test Exception Safe.

```
testCase.addTeardown(@() testCase.cleanUpTemporaryFolder(tempFolder))
```

Place teardown code in the helper function. Although the `addTeardown` statement occurs in the same code block as the `mkdir` setup statement, the `cleanUpTemporaryFolder` code is executed in phase 4 of the test method.

In the `DocPolynomSaveLoadTest` test case, the helper function, `cleanUpTemporaryFolder`, executes the `rmdir` function.

Define the precondition for creating valid MAT-File. A precondition for verifying that the `DocPolynom` object was correctly saved and loaded is that the MAT-file, `DocPolynomFile.mat`, was successfully created. The following code in the `Phase 2: Exercise` block tests this condition. If an assertion occurs, the remainder of the `testSaveLoad` test method is invalid, and the test is marked `Failed` and `Incomplete`.

```
 testCase.assertEqual(exist('DocPolynomFile.mat','file'), 2, ...
     Diagnostic.join('The mat file was not saved correctly.', ...
     @() dir(pwd)))
```

If the file was not created, MATLAB displays the diagnostic message, `The mat file was not saved correctly`, as well as the contents of the temporary folder.

Run `DocPolynomSaveLoadTest` Test Case.

```
tc = DocPolynomSaveLoadTest;
run(tc);
```

```
Running DocPolynomSaveLoadTest
.
Done DocPolynomSaveLoadTest
__________
```

Definitions

Exception Safe

Test content is *exception safe* when all fixture teardown is performed with `addTeardown` or through the appropriate object destructors when a failure occurs. This ensures that the failure does not affect later testing due to stale fixtures.

This code is not exception safe. After an assertion failure, the test framework does not close the figure.

```
% Not exception safe
f = figure;
testCase.assertEqual(actual, expected);
close(f);
```

This code is exception safe because the test framework closes the figure in all cases.

```
% Exception safe
f = figure;
testCase.addTeardown(@close, f);
testCase.assertEqual(actual, expected);
```

However, tearing down a fixture using `addTeardown` does not guarantee code is exception safe. This code shows a failure in `assertEqual`.

```
% Not exception safe
f = figure;
testCase.assertEqual(actual, expected);
testCase.addTeardown(@close, f);
```

See Also

See Also

Assumable | FatalAssertable | `matlab.unittest.qualifications` | QualificationEventData | TestCase | Verifiable

Topics

"Types of Qualifications"

Introduced in R2013a

assertClass

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert exact class of specified value

Syntax

```
assertClass(assertable,actual,className)
assertClass(assertable,actual,metaClass)
assertClass( ___ ,diagnostic)
```

Description

`assertClass(assertable,actual,className)` asserts that `actual` is a MATLAB value whose class is the class specified by `className`.

`assertClass(assertable,actual,metaClass)` asserts that `actual` is a MATLAB value whose class is the class specified by the `meta.class` instance `metaClass`. The instance must be an exact class match. See `assertInstanceOf` to assert inclusion in a class hierarchy.

`assertClass( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`className`

Name of class, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyClass, and replace calls to `verifyClass` with `assertClass`.

Tips

- The method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsOfClass;
  assertable.assertThat(actual, IsOfClass(className));
  assertable.assertThat(actual, IsOfClass(metaClass));
  ```

  There exists more functionality when using the `IsOfClass` constraint directly via `assertThat`.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertInstanceOf | assertThat

Topics

"Types of Qualifications"

Introduced in R2013a

assertEmpty

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is empty

Syntax

```
assertEmpty(assertable,actual)
assertEmpty(assertable,actual,diagnostic)
```

Description

`assertEmpty(assertable,actual)` asserts that `actual` is an empty MATLAB value.

`assertEmpty(assertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array

- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyEmpty, and replace calls to `verifyEmpty` with `assertEmpty`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEmpty;
  assertable.assertThat(actual, IsEmpty());
  ```

  This method is a convenience method. There exists more functionality when using the `IsEmpty` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertNotEmpty | assertThat | `isempty`

Topics

"Types of Qualifications"

Introduced in R2013a

assertEqual

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is equal to specified value

Syntax

```
assertEqual(assertable,actual,expected)
assertEqual( ___ ,Name,Value)
assertEqual( ___ ,diagnostic)
```

Description

`assertEqual(assertable,actual,expected)` asserts that `actual` is strictly equal to `expected`.

`assertEqual( ___ ,Name,Value)` asserts equality with additional options specified by one or more `Name,Value` pair arguments.

`assertEqual( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expected`

Expected value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'AbsTol'`

Absolute tolerance, specified as a numeric array. The tolerance is applied only to values of the same data type. The value can be a scalar or array the same size as the actual and expected values.

For an absolute tolerance to be satisfied, `abs(expected-actual) <= absTol` must be true.

Default:

`'RelTol'`

Relative tolerance, specified as a numeric array. The tolerance is applied only to values of the same data type. The value can be a scalar or array the same size as the actual and expected values.

For a relative tolerance to be satisfied, `abs(expected-actual) <= relTol.*abs(expected)` must be true.

Default:

Examples

See examples for verifyEqual, and replace calls to `verifyEqual` with `assertEqual`.

Tips

- This method is functionally equivalent to any of the following:

  ```
  import matlab.unittest.constraints.IsEqualTo;
  assertable.assertThat(actual, IsEqualTo(expected));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.AbsoluteTolerance;
  assertable.assertThat(actual, IsEqualTo(expected, ...
      'Within', AbsoluteTolerance(abstol)));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.RelativeTolerance;
  assertable.assertThat(actual, IsEqualTo(expected, ...
      'Within', RelativeTolerance(reltol)));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.AbsoluteTolerance;
  import matlab.unittest.constraints.RelativeTolerance;
  assertable.assertThat(actual, IsEqualTo(expected, ...
      'Within', AbsoluteTolerance(abstol) | RelativeTolerance(reltol)));
  ```

  There exists more functionality when using the `IsEqualTo`, `RelativeTolerance`, and `IsEqualTo` constraints directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs

to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertNotEqual | assertThat

Topics

"Types of Qualifications"

Introduced in R2013a

assertError

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert function throws specified exception

Syntax

```
assertError(assertable,actual,identifier)
assertError(assertable,actual,metaClass)
assertError( ___ ,diagnostic)
```

Description

`assertError(assertable,actual,identifier)` asserts that `actual` is a function handle that throws an exception with an error identifier that is equal to `identifier`.

`assertError(assertable,actual,metaClass)` asserts that `actual` is a function handle that throws an exception whose type is defined by the `meta.class` instance specified in `metaClass`. This method does not require the instance to be an exact class match, but rather it must be in the specified class hierarchy, and that hierarchy must include the `MException` class.

`assertError( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`identifier`

Error identifier, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyError, and replace calls to `verifyError` with `assertError`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.Throws;
  assertable.assertThat(actual, Throws(identifier));
  assertable.assertThat(actual, Throws(metaClass));
  ```

  There exists more functionality when using the `Throws` constraint directly via `assertThat`.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

MException | assertThat | assertWarning | `error`

Topics

"Types of Qualifications"

Introduced in R2013a

assertFail

Produce unconditional assertion failure

Syntax

```
assertFail(assertable)
assertFail(assertable,diagnostic)
```

Description

`assertFail(assertable)` produces an unconditional assertion failure when encountered.

`assertFail(assertable,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyFail, and replace calls to `verifyFail` with `assertFail`.

Tips

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

Topics

"Types of Qualifications"

Introduced in R2013a

assertFalse

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is false

Syntax

```
assertFalse(assertable,actual)
assertFalse(assertable,actual,diagnostic)
```

Description

`assertFalse(assertable,actual)` asserts that `actual` is a scalar logical with the value of false.

`assertFalse(assertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

For examples, see verifyFalse, and replace calls to `verifyFalse` with `assertFalse`.

Tips

- This method passes if and only if the actual value is a scalar logical with a value of false. Therefore, entities such as empty arrays, false valued arrays, and zero doubles produce failures when used in this method, despite these entities exhibiting "false-like" behavior such as bypassing the execution of code inside of "if" statements.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsFalse;
  assertable.assertThat(actual, IsFalse());
  ```

  There exists more functionality when using the `IsFalse` constraint directly via `assertThat`.
- Unlike `assertTrue`, this method may create a new constraint for each call. For performance critical uses, consider using `assertTrue`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertThat | assertTrue

Topics

"Types of Qualifications"

Introduced in R2013a

assertGreaterThan

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is greater than specified value

Syntax

```
assertGreaterThan(assertable,actual,floor)
assertGreaterThan(assertable,actual,floor,diagnostic)
```

Description

`assertGreaterThan(assertable,actual,floor)` asserts that all elements of `actual` are greater than all the elements of `floor`.

`assertGreaterThan(assertable,actual,floor,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `floor` unless either one is scalar, at which point scalar expansion occurs.

`floor`

Minimum value, exclusive.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyGreaterThan, and replace calls to `verifyGreaterThan` with `assertGreaterThan`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsGreaterThan;
  assertable.assertThat(actual, IsGreaterThan(floor));
  ```

  There exists more functionality when using the `IsGreaterThan` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

matlab.unittest.constraints.IsGreaterThan | matlab.unittest.diagnostics.Diagnostic | assertGreaterThanOrEqual | assertLessThan | assertLessThanOrEqual | assertThat | `gt`

Topics

"Types of Qualifications"

Introduced in R2013a

assertGreaterThanOrEqual

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is greater than or equal to specified value

Syntax

```
assertGreaterThanOrEqual(assertable,actual,floor)
assertGreaterThanOrEqual(assertable,actual,floor,diagnostic)
```

Description

`assertGreaterThanOrEqual(assertable,actual,floor)` asserts that all elements of `actual` are greater than or equal to all the elements of `floor`.

`assertGreaterThanOrEqual(assertable,actual,floor,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `floor` unless either one is scalar, at which point scalar expansion occurs.

`floor`

Minimum value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyGreaterThanOrEqual, and replace calls to `verifyGreaterThanOrEqual` with `assertGreaterThanOrEqual`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsGreaterThanOrEqualTo;
  assertable.assertThat(actual, IsGreaterThanOrEqualTo(floor));
  ```

  There exists more functionality when using the `IsGreaterThanOrEqualTo` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

matlab.unittest.constraints.IsGreaterThanOrEqualTo | matlab.unittest.diagnostics.Diagnostic | assertGreaterThan | assertLessThan | assertLessThanOrEqual | assertThat | `ge`

Topics

"Types of Qualifications"

Introduced in R2013a

assertInstanceOf

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is object of specified type

Syntax

```
assertInstanceOf(assertable,actual,className)
assertInstanceOf(assertable,actual,metaClass)
assertInstanceOf( ___ ,diagnostic)
```

Description

`assertInstanceOf(assertable,actual,className)` asserts that `actual` is a MATLAB value whose class is the class specified by `className`.

`assertInstanceOf(assertable,actual,metaClass)` asserts that `actual` is a MATLAB value whose class is the class specified by the `meta.class` instance `metaClass`.

`assertInstanceOf( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`className`

Name of class, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyInstanceOf, and replace calls to `verifyInstanceOf` with `assertInstanceOf`.

Tips

- This method is functionally equivalent to:

  ```
  assertable.assertThat(actual, IsInstanceOf(className));
  assertable.assertThat(actual, IsInstanceOf(metaClass));
  ```

  There exists more functionality when using the `IsInstanceOf` constraint directly via `assertThat`.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertClass | assertThat | `isa`

Topics

"Types of Qualifications"

Introduced in R2013a

assertLength

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value has specified length

Syntax

```
assertLength(assertable,actual,expectedLength)
assertLength(assertable,actual,expectedLength,diagnostic)
```

Description

`assertLength(assertable,actual,expectedLength)` that `actual` is a MATLAB array whose length is `expectedLength`.

`assertLength(assertable,actual,expectedLength,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedLength`

The length of an array is defined as the largest dimension of that array.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyLength, and replace calls to `verifyLength` with `assertLength`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasLength;
  assertable.assertThat(actual, HasLength(expectedLength));
  ```

  There exists more functionality when using the `HasLength` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertNumElements | assertSize | assertThat | `length`

Topics

"Types of Qualifications"

Introduced in R2013a

assertLessThan

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is less than specified value

Syntax

```
assertLessThan(assertable,actual,ceiling)
assertLessThan(assertable,actual,ceiling,diagnostic)
```

Description

`assertLessThan(assertable,actual,ceiling)` asserts that all elements of `actual` are less than all the elements of `ceiling`.

`assertLessThan(assertable,actual,ceiling,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `ceiling` unless either one is scalar, at which point scalar expansion occurs.

Default:

`ceiling`

Maximum value, exclusive.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyLessThan, and replace calls to LessThan with `assertLessThan`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsLessThan;
  assertable.assertThat(actual, IsLessThan(ceiling));
  ```

  There exists more functionality when using the `IsLessThan` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

matlab.unittest.constraints.IsLessThan | matlab.unittest.diagnostics.Diagnostic | assertGreaterThan | assertGreaterThanOrEqual | assertLessThanOrEqual | assertThat | `lt`

Topics

"Types of Qualifications"

Introduced in R2013a

assertLessThanOrEqual

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is less than or equal to specified value

Syntax

```
assertLessThanOrEqual(assertable,actual,ceiling)
assertLessThanOrEqual(assertable,actual,ceiling,diagnostic)
```

Description

`assertLessThanOrEqual(assertable,actual,ceiling)` asserts that all elements of `actual` are less than or equal to all the elements of `ceiling`.

`assertLessThanOrEqual(assertable,actual,ceiling,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `ceiling` unless either one is scalar, at which point scalar expansion occurs.

Default:

`ceiling`

Maximum value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyLessThanOrEqual, and replace calls to `verifyLessThanOrEqual` with `assertLessThanOrEqual`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsLessThanOrEqualTo;
  assertable.assertThat(actual, IsLessThanOrEqualTo(ceiling));
  ```

  There exists more functionality when using the `IsLessThanOrEqualTo` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

matlab.unittest.constraints.IsLessThanOrEqualTo | matlab.unittest.diagnostics.Diagnostic | assertGreaterThan | assertGreaterThanOrEqual | assertLessThan | assertThat | `le`

Topics

"Types of Qualifications"

Introduced in R2013a

assertMatches

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert string matches specified regular expression

Syntax

```
assertMatches(assertable,actual,expression)
assertMatches(assertable,actual,expression,diagnostic)
```

Description

`assertMatches(assertable,actual,expression)` asserts that `actual` is a string scalar or character vector that matches the regular expression defined by `expression`.

`assertMatches(assertable,actual,expression,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expression`

The value to match, specified as a regular expression.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyMatches, and replace calls to `verifyMatches` with `assertMatches`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.Matches;
  assertable.assertThat(actual, Matches(expression));
  ```

  There exists more functionality when using the `Matches` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertSubstring | assertThat | `regexp`

Topics

"Types of Qualifications"

Introduced in R2013a

assertNotEmpty

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is not empty

Syntax

```
assertNotEmpty(assertable,actual)
assertNotEmpty(assertable,actual,diagnostic)
```

Description

`assertNotEmpty(assertable,actual)` asserts that `actual` is a non-empty MATLAB value.

`assertNotEmpty(assertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNotEmpty, and replace calls to `verifyNotEmpty` with `assertNotEmpty`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEmpty;
  assertable.assertThat(actual, ~IsEmpty());
  ```

  There exists more functionality when using the `IsEmpty` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there

is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertEmpty | assertThat | `isempty`

Topics

"Types of Qualifications"

Introduced in R2013a

assertNotEqual

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is not equal to specified value

Syntax

```
assertNotEqual(assertable,actual,notExpected)
assertNotEqual(assertable,actual,notExpected,diagnostic)
```

Description

`assertNotEqual(assertable,actual,notExpected)` asserts that `actual` is not equal to `notExpected`.

`assertNotEqual(assertable,actual,notExpected,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`notExpected`

Value to compare.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNotEqual, and replace calls to `verifyNotEqual` with `assertNotEqual`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEqualTo;
  assertable.assertThat(actual, ~IsEqualTo(notExpected));
  ```

  There exists more functionality when using the `IsEqualTo` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertEqual | assertThat

Topics

"Types of Qualifications"

Introduced in R2013a

assertNotSameHandle

Class: matlab.unittest.TestCase
Package: matlab.unittest

Assert value is not handle to specified instance

Syntax

```
assertNotSameHandle(assertable,actual,notExpectedHandle)
assertNotSameHandle(assertable,actual,notExpectedHandle,diagnostic)
```

Description

`assertNotSameHandle(assertable,actual,notExpectedHandle)` asserts that `actual` is a different size and/or does not contain the same instances as the `notExpectedHandle` handle array.

`assertNotSameHandle(assertable,actual,notExpectedHandle,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`notExpectedHandle`

The handle array to compare.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNotSameHandle, and replace calls to `verifyNotSameHandle` with `assertNotSameHandle`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsSameHandleAs;
  assertable.assertThat(actual, ~IsSameHandleAs(notExpectedHandle));
  ```

  There exists more functionality when using the `IsSameHandleAs` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertSameHandle | assertThat

Topics

"Types of Qualifications"

Introduced in R2013a

assertNumElements

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value has specified element count

Syntax

```
assertNumElements(assertable,actual,expectedElementCount)
assertNumElements(assertable,actual,expectedElementCount,diagnostic)
```

Description

`assertNumElements(assertable,actual,expectedElementCount)` asserts that `actual` is a MATLAB array with `expectedElementCount` number of elements.

`assertNumElements(assertable,actual,expectedElementCount,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedElementCount`

The expected number of elements in the array.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNumElements, and replace calls to `verifyNumElements` with `assertNumElements`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasElementCount;
  assertable.assertThat(actual, HasElementCount(expectedElementCount));
  ```

  There exists more functionality when using the `HasElementCount` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertLength | assertSize | assertThat | `numel`

Topics

"Types of Qualifications"

Introduced in R2013a

assertReturnsTrue

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert function returns true when evaluated

Syntax

```
assertReturnsTrue(assertable,actual)
assertReturnsTrue(assertable,actual,diagnostic)
```

Description

`assertReturnsTrue(assertable,actual)` asserts that `actual` is a function handle that returns a scalar logical whose value is true.

`assertReturnsTrue(assertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyReturnsTrue, and replace calls to `verifyReturnsTrue` with `assertReturnsTrue`.

Tips

- It is a shortcut for quick custom comparison functionality that can be defined quickly, and possibly inline. It can be preferable over simply evaluating the function directly and using `assertTrue` because the function handle will be shown in the diagnostics, thus providing more insight into the failure condition which is lost when using `assertTrue`.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.ReturnsTrue;
  assertable.assertThat(actual, ReturnsTrue());
  ```

  There exists more functionality when using the `ReturnsTrue` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertThat | assertTrue

Topics

"Types of Qualifications"

Introduced in R2013a

assertSameHandle

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert two values are handles to same instance

Syntax

```
assertSameHandle(assertable,actual,expectedHandle)
assertSameHandle(assertable,actual,expectedHandle,diagnostic)
```

Description

`assertSameHandle(assertable,actual,expectedHandle)` asserts that `actual` is the same size and contains the same instances as the `expectedHandle` handle array.

`assertSameHandle(assertable,actual,expectedHandle,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedHandle`

The expected handle array.

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifySameHandle, and replace calls to `verifySameHandle` with `assertSameHandle`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsSameHandleAs;
  assertable.assertThat(actual, IsSameHandleAs(expectedHandle));
  ```

  There exists more functionality when using the `IsSameHandleAs` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

handle | assertNotSameHandle | assertThat

Topics

"Types of Qualifications"

Introduced in R2013a

assertSize

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value has specified size

Syntax

```
assertSize(assertable,actual,expectedSize)
assertSize(assertable,actual,expectedSize,diagnostic)
```

Description

`assertSize(assertable,actual,expectedSize)` asserts that `actual` is a MATLAB array whose size is `expectedSize`.

`assertSize(assertable,actual,expectedSize,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedSize`

The expected sizes of each dimension the array.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifySize, and replace calls to `verifySize` with `assertSize`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasSize;
  assertable.assertThat(actual, HasSize(expectedSize));
  ```

  There exists more functionality when using the `HasSize` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertLength | assertNumElements | assertThat | `size`

Topics

"Types of Qualifications"

Introduced in R2013a

assertSubstring

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert string contains specified string

Syntax

```
assertSubstring(assertable,actual,substring)
assertSubstring(assertable,actual,substring,diagnostic)
```

Description

`assertSubstring(assertable,actual,substring)` asserts that `actual` is a string scalar or character vector that contains `substring`.

`assertSubstring(assertable,actual,substring,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`substring`

The value to match, specified as a string scalar or character vector.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifySubstring, and replace calls to `verifySubstring` with `assertSubstring`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.ContainsSubstring;
  assertable.assertThat(actual, ContainsSubstring(substring));
  ```

  There exists more functionality when using the `ContainsSubstring` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertMatches | assertThat | `strfind`

Topics

"Types of Qualifications"

Introduced in R2013a

assertThat

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert that value meets specified constraint

Syntax

```
assertThat(assertable,actual,constraint)
assertThat(assertable,actual,constraint,diagnostic)
```

Description

`assertThat(assertable,actual,constraint)` asserts that `actual` is a value that satisfies the `constraint` provided.

If the constraint is not satisfied, an assertion failure is produced utilizing only the framework diagnostic generated by the `constraint`.

`assertThat(assertable,actual,constraint,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

When using this signature, both the diagnostic information contained within `diagnostic` is used in addition to the diagnostic information provided by the `constraint`.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`constraint`

Constraint that the actual value must satisfy to pass the verification, specified as a matlab.unittest.constraints instance.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyThat, and replace calls to `verifyThat` with `assertThat`.

Tips

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

Topics

"Types of Qualifications"

Introduced in R2013a

assertTrue

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert value is true

Syntax

```
assertTrue(assertable,actual)
assertTrue(assertable,actual,diagnostic)
```

Description

`assertTrue(assertable,actual)` asserts that `actual` is a scalar logical with the value of true.

`assertTrue(assertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array

- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyTrue, and replace calls to `verifyTrue` with `assertTrue`.

Tips

- This method passes if and only if the actual value is a scalar logical with a value of true. Therefore, entities such as true valued arrays and non-zero doubles produce qualification failures when used in this method, despite these entities exhibiting "true-like" behavior such as triggering the execution of code inside of "if" statements.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsTrue;
  assertable.assertThat(actual, IsTrue());
  ```

  There exists more functionality when using the `IsTrue` constraint directly via `assertThat`.

  Use of this method for performance benefits can come at the expense of less diagnostic information, and may not provide the same level of strictness adhered to by other constraints such as `IsEqualTo`. A similar approach that is generally less performant but can provide slightly better diagnostic information is the use of `assertReturnsTrue`, which at least shows the display of the function evaluated to generate the failing result.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs

to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertFalse | assertReturnsTrue | assertThat

Topics

"Types of Qualifications"

Introduced in R2013a

assertWarning

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert function issues specified warning

Syntax

```
assertWarning(assertable,actual,warningID)
assertWarning(assertable,actual,warningID,diagnostic)
[output1,...,outputN] = assertWarning( ___ )
```

Description

`assertWarning(assertable,actual,warningID)` asserts that `actual` issues a warning with the identifier `warningID`.

`assertWarning(assertable,actual,warningID,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

`[output1,...,outputN] = assertWarning( ___ )` also returns the output arguments `output1,...,outputN` that are produced when invoking `actual`.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

`warningID`

Warning ID, specified as a character vector.

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Output Arguments

`output1,...,outputN`

Output arguments, 1 through n (if any), from `actual`, returned as any type. The argument type is specified by the `actual` argument list.

Examples

See examples for verifyWarning, and replace calls to `verifyWarning` with `assertWarning`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IssuesWarnings;
  assertable.assertThat(actual, IssuesWarnings({warningID}));
  ```

  There exists more functionality when using the `IssuesWarnings` constraint directly via `assertThat`.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertError | assertThat | assertWarningFree | `warning`

Topics

"Types of Qualifications"

Introduced in R2013a

assertWarningFree

Class: matlab.unittest.qualifications.Assertable
Package: matlab.unittest.qualifications

Assert function issues no warnings

Syntax

```
assertWarningFree(assertable,actual)
assertWarningFree(assertable,actual,diagnostic)
[output1,...,outputN] = assertWarningFree( ___ )
```

Description

`assertWarningFree(assertable,actual)` asserts that `actual` is a function handle that issues no warnings.

`assertWarningFree(assertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

`[output1,...,outputN] = assertWarningFree( ___ )` also returns the output arguments `output1,...,outputN` that are produced when invoking `actual`.

Input Arguments

`assertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assertion in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Output Arguments

`output1,...,outputN`

Output arguments, 1 through n (if any), from `actual`, returned as any type. The argument type is specified by the `actual` argument list.

Examples

See examples for verifyWarningFree, and replace calls to `verifyWarningFree` with `assertWarningFree`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IssuesNoWarnings;
  assertable.assertThat(actual, IssuesNoWarnings());
  ```

  There exists more functionality when using the `IssuesNoWarnings` constraint directly via `assertThat`.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. Alternatively,

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

assertThat | assertWarning | `warning`

Topics

"Types of Qualifications"

Introduced in R2013a

matlab.unittest.qualifications.AssertionFailedException class

Package: matlab.unittest.qualifications

Exception used for assertion failures

Description

The `AssertionFailedException` class provides an exception used for assertion failures. This class is used exclusively by the Assertable qualification type.

See Also

See Also

MException | Assertable

matlab.unittest.qualifications.Assumable class

Package: matlab.unittest.qualifications

Qualification to filter test content

Description

The `Assumable` class provides a qualification to filter test content. Apart from actions performed in the event of failures, the `Assumable` class works the same as other `matlab.unittest` qualifications.

Upon an assumption failure, the `Assumable` class informs the testing framework of the failure by throwing an `AssumptionFailedException`. The test framework then marks the test content as filtered and continues testing. Often, assumptions are used to ensure that the test is run only when certain preconditions are met. However, running the test without satisfying the preconditions does not produce a test failure. Ensure that the test content is "Exception Safe" on page 1-9171. If the failure condition is meant to produce a test failure, use assertions or verifications instead of assumptions.

The attributes specified in the `TestCase` method definition determine which tests are filtered. The following behavior occurs when the test framework encounters an assumption failure inside of a `TestCase` method:

- If you define the `TestCase` method using the `Test` attribute, the framework marks the entire method as filtered and runs subsequent test methods.
- If you define the `TestCase` method using the `TestMethodSetup` or `TestMethodTeardown` attributes, the test framework marks the method to run for that instance as filtered.
- If you define the `TestCase` method using the `TestClassSetup` or `TestClassTeardown` attributes, the test framework filters the entire `TestCase` class.

Filtering test content using assumptions does not produce test failures. Therefore, dead test code can result. Avoid this by monitoring filtered tests.

Methods

assumeClass	Assume exact class of specified value
assumeEmpty	Assume value is empty
assumeEqual	Assume value is equal to specified value
assumeError	Assume function throws specified exception
assumeFail	Produce unconditional assumption failure
assumeFalse	Assume value is false
assumeGreaterThan	Assume value is greater than specified value
assumeGreaterThanOrEqual	Assume value is greater than or equal to specified value
assumeInstanceOf	Assume value is object of specified type
assumeLength	Assume value has specified length
assumeLessThan	Assume value is less than specified value
assumeLessThanOrEqual	Assume value is less than or equal to specified value
assumeMatches	Assume string matches specified regular expression
assumeNotEmpty	Assume value is not empty
assumeNotEqual	Assume value is not equal to specified value
assumeNotSameHandle	Assume value is not handle to specified instance
assumeNumElements	Assume value has specified element count
assumeReturnsTrue	Assume function returns true when evaluated
assumeSameHandle	Assume two values are handles to same instance
assumeSize	Assume value has specified size
assumeSubstring	Assume string contains specified string
assumeThat	Assume value meets specified constraint

assumeTrue	Assume value is true
assumeWarning	Assume function issues specified warning
assumeWarningFree	Assume function issues no warnings

Events

`AssumptionFailed`	Triggered upon failing assumption. A `QualificationEventData` object is passed to listener callback functions.
`AssumptionPassed`	Triggered upon passing assumption. A `QualificationEventData` object is passed to listener callback functions.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Write TestClassSetup Method Using Assumptions

Assumptions assure that a test runs only when certain preconditions are satisfied and when such an event should not produce a test failure. When an assumption failure occurs, the test is marked as filtered.

Create `IsSupportedTest` test case. Refer to the following `IsSupportedTest` test case in the subsequent steps in this example, which highlight specific functions in the file.

IsSupportedTest Class Definition File

```
classdef IsSupportedTest < matlab.unittest.TestCase
    methods(TestClassSetup)
        function TestPlatform(testcase)
            testcase.assumeFalse(ispc,...
                'Do not run any of these tests on Windows.')
```

```
        end
    end
    methods(Test)
        function test1(testcase)
            % write test code here
        end
    end
end
```

To execute the MATLAB commands in this example, add the `IsSupportedTest.m` file to a folder on your MATLAB path.

Write Test to Verify Platform. All tests in this test case must run on UNIX platforms only. The `TestPlatform` function uses the `assumeFalse` method to test if MATLAB is running on a Windows platform. If it is, the test fails.

```
function TestPlatform(testcase)
    testcase.assumeFalse(ispc,...
        'Do not run any of these tests on Windows.')
end
```

Make `TestPlatform` a `TestClassSetup` Test. To make the `TestPlatform` test a precondition, add it inside the `methods (TestClassSetup)` block.

Run the test case. Create a test case object and run the tests on a Windows platform.

```
tc = IsSupportedTest;
res = tc.run;
```

```
Running IsSupportedTest

================================================================================
All tests in IsSupportedTest were filtered.
    Test Diagnostic: Do not run any of these tests on Windows.
    Details
================================================================================

Done IsSupportedTest
__________

Failure Summary:

     Name                    Failed  Incomplete  Reason(s)
    ==================================================================
     IsSupportedTest/test1              X       Filtered by assumption.
```

The test(s) were filtered, and did not run (marked `Incomplete`).

For more information, click the Details link.

```
==============================================================================
An assumption was not met while setting up or tearing down IsSupportedTest.
As a result, all IsSupportedTest tests were filtered.

    ----------------
    Test Diagnostic:
    ----------------
    Do not run any of these tests on Windows.

    ---------------------
    Framework Diagnostic:
    ---------------------
    assumeFalse failed.
    --> The value must evaluate to "false".

    Actual Value:
             1

    ------------------
    Stack Information:
    ------------------
    In C:\work\IsSupportedTest.m (IsSupportedTest.TestPlatform) at 4
==============================================================================
```

The link to `IsSupportedTest.TestPlatform` under `Stack Information` takes you to the failed `assumeFalse` method.

Definitions

Exception Safe

Test content is *exception safe* when all fixture teardown is performed with `addTeardown` or through the appropriate object destructors when a failure occurs. This ensures that the failure does not affect later testing due to stale fixtures.

This code is not exception safe. After an assertion failure, the test framework does not close the figure.

```
% Not exception safe
f = figure;
testCase.assumeEqual(actual, expected)
close(f)
```

This code is exception safe because the test framework closes the figure in all cases.

```
% Exception safe
f = figure;
testCase.addTeardown(@close, f)
testCase.assumeEqual(actual, expected)
```

However, tearing down a fixture using `addTeardown` does not guarantee code is exception safe. This code shows a failure in `assumeEqual`.

```
% Not exception safe
f = figure;
testCase.assumeEqual(actual, expected)
testCase.addTeardown(@close, f)
```

See Also

See Also

Assertable | FatalAssertable | `matlab.unittest.qualifications` | QualificationEventData | TestCase | Verifiable

Topics

"Types of Qualifications"
"Dynamically Filtered Tests"

Introduced in R2013a

assumeClass

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume exact class of specified value

Syntax

```
assumeClass(assumable,actual,className)
assumeClass(assumable,actual,metaClass)
assumeClass( ___ ,diagnostic)
```

Description

`assumeClass(assumable,actual,className)` assumes that `actual` is a MATLAB value whose class is the class specified by `className`.

`assumeClass(assumable,actual,metaClass)` assumes that `actual` is a MATLAB value whose class is the class specified by the `meta.class` instance `metaClass`. The instance must be an exact class match. See `assumeInstanceOf` to assume inclusion in a class hierarchy.

`assumeClass( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`className`

Name of class, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyClass, and replace calls to `verifyClass` with `assumeClass`.

Tips

- The method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsOfClass;
  assumable.assumeThat(actual, IsOfClass(className));
  assumable.assumeThat(actual, IsOfClass(metaClass));
  ```

  There exists more functionality when using the `IsOfClass` constraint directly via `assumeThat`.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeInstanceOf | assumeThat

Topics

"Types of Qualifications"

Introduced in R2013a

assumeEmpty

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is empty

Syntax

```
assumeEmpty(assumable,actual)
assumeEmpty(assumable,actual,diagnostic)
```

Description

`assumeEmpty(assumable,actual)` assumes that `actual` is an empty MATLAB value.

`assumeEmpty(assumable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array

- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyEmpty, and replace calls to `verifyEmpty` with `assumeEmpty`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEmpty;
  assumable.assumeThat(actual, IsEmpty());
  ```

  There exists more functionality when using the `IsEmpty` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeNotEmpty | assumeThat | `isempty`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeEqual

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is equal to specified value

Syntax

```
assumeEqual(assumable,actual,expected)
assumeEqual( ___ ,Name,Value)
assumeEqual( ___ ,diagnostic)
```

Description

`assumeEqual(assumable,actual,expected)` assumes that `actual` is strictly equal to `expected`.

`assumeEqual( ___ ,Name,Value)` assumes equality with additional options specified by one or more `Name,Value` pair arguments.

`assumeEqual( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expected`

Expected value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'AbsTol'`

Absolute tolerance, specified as a numeric array. The tolerance is applied only to values of the same data type. The value can be a scalar or array the same size as the actual and expected values.

For an absolute tolerance to be satisfied, `abs(expected-actual) <= absTol` must be true.

Default:

`'RelTol'`

Relative tolerance, specified as a numeric array. The tolerance is applied only to values of the same data type. The value can be a scalar or array the same size as the actual and expected values.

For a relative tolerance to be satisfied, `abs(expected-actual) <= relTol.*abs(expected)` must be true.

Default:

Examples

See examples for verifyEqual, and replace calls to `verifyEqual` with `assumeEqual`.

Tips

- This method is functionally equivalent to any of the following:

  ```
  import matlab.unittest.constraints.IsEqualTo;
  assumable.assumeThat(actual, IsEqualTo(expected));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.AbsoluteTolerance;
  assumable.assumeThat(actual, IsEqualTo(expected, ...
      'Within', AbsoluteTolerance(abstol)));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.RelativeTolerance;
  assumable.assumeThat(actual, IsEqualTo(expected, ...
      'Within', RelativeTolerance(reltol)));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.AbsoluteTolerance;
  import matlab.unittest.constraints.RelativeTolerance;
  assumable.assumeThat(actual, IsEqualTo(expected, ...
      'Within', AbsoluteTolerance(abstol) | RelativeTolerance(reltol)));
  ```

  There exists more functionality when using the `IsEqualTo`, `RelativeTolerance`, and `IsEqualTo` constraints directly via `assumeThat`.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs

to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeNotEqual | assumeThat

Topics

"Types of Qualifications"

Introduced in R2013a

assumeError

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume function throws specified exception

Syntax

```
assumeError(assumable,actual,identifier)
assumeError(assumable,actual,metaClass)
assumeError( ___ ,diagnostic)
```

Description

`assumeError(assumable,actual,identifier)` assumes that `actual` is a function handle that throws an exception with an error identifier that is equal to `identifier`.

`assumeError(assumable,actual,metaClass)` assumes that `actual` is a function handle that throws an exception whose type is defined by the `meta.class` instance specified in `metaClass`. This method does not require the instance to be an exact class match, but rather it must be in the specified class hierarchy, and that hierarchy must include the `MException` class.

`assumeError( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`identifier`

Error identifier, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyError, and replace calls to `verifyError` with `assumeError`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.Throws;
  assumable.assumeThat(actual, Throws(identifier));
  assumable.assumeThat(actual, Throws(metaClass));
  ```

  There exists more functionality when using the `Throws` constraint directly via `assumeThat`.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

MException | assumeThat | assumeWarning | `error`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeFail

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Produce unconditional assumption failure

Syntax

```
assumeFail(assumable)
assumeFail(assumable,diagnostic)
```

Description

`assumeFail(assumable)` produces an unconditional assumption failure when encountered.

`assumeFail(assumable,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyFail, and replace calls to `verifyFail` with `assumeFail`.

Tips

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

Topics

"Types of Qualifications"

Introduced in R2013a

assumeFalse

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is false

Syntax

```
assumeFalse(assumable,actual)
assumeFalse(assumable,actual,diagnostic)
```

Description

`assumeFalse(assumable,actual)` assumes that `actual` is a scalar logical with the value of false.

`assumeFalse(assumable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

For examples, see verifyFalse, and replace calls to `verifyFalse` with `assumeFalse`.

Tips

- This method passes if and only if the actual value is a scalar logical with a value of false. Therefore, entities such as empty arrays, false valued arrays, and zero doubles produce failures when used in this method, despite these entities exhibiting "false-like" behavior such as bypassing the execution of code inside of "if" statements.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsFalse;
  assumable.assumeThat(actual, IsFalse());
  ```

  There exists more functionality when using the `IsFalse` constraint directly via `assumeThat`.
- Unlike `assumeTrue`, this method may create a new constraint for each call. For performance critical uses, consider using `assumeTrue`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeThat | assumeTrue

Topics

"Types of Qualifications"

Introduced in R2013a

assumeGreaterThan

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is greater than specified value

Syntax

```
assumeGreaterThan(assumable,actual,floor)
assumeGreaterThan(assumable,actual,floor,diagnostic)
```

Description

`assumeGreaterThan(assumable,actual,floor)` assumes that all elements of `actual` are greater than all the elements of `floor`.

`assumeGreaterThan(assumable,actual,floor,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `floor` unless either one is scalar, at which point scalar expansion occurs.

`floor`

Minimum value, exclusive.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyGreaterThan, and replace calls to `verifyGreaterThan` with `assumeGreaterThan`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsGreaterThan;
  assumable.assumeThat(actual, IsGreaterThan(floor));
  ```

  There exists more functionality when using the `IsGreaterThan` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsGreaterThan | matlab.unittest.diagnostics.Diagnostic | assumeGreaterThanOrEqual | assumeLessThan | assumeLessThanOrEqual | assumeThat | `gt`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeGreaterThanOrEqual

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is greater than or equal to specified value

Syntax

```
assumeGreaterThanOrEqual(assumable,actual,floor)
assumeGreaterThanOrEqual(assumable,actual,floor,diagnostic)
```

Description

`assumeGreaterThanOrEqual(assumable,actual,floor)` assumes that all elements of `actual` are greater than or equal to all the elements of `floor`.

`assumeGreaterThanOrEqual(assumable,actual,floor,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `floor` unless either one is scalar, at which point scalar expansion occurs.

`floor`

Minimum value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyGreaterThanOrEqual, and replace calls to `verifyGreaterThanOrEqual` with `assumeGreaterThanOrEqual`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsGreaterThanOrEqualTo;
  assumable.assumeThat(actual, IsGreaterThanOrEqualTo(floor));
  ```

  There exists more functionality when using the `IsGreaterThanOrEqualTo` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsGreaterThanOrEqualTo | matlab.unittest.diagnostics.Diagnostic | assumeGreaterThan | assumeLessThan | assumeLessThanOrEqual | assumeThat | `ge`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeInstanceOf

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is object of specified type

Syntax

```
assumeInstanceOf(assumable,actual,className)
assumeInstanceOf(assumable,actual,metaClass)
assumeInstanceOf( ___ ,diagnostic)
```

Description

`assumeInstanceOf(assumable,actual,className)` assumes that `actual` is a MATLAB value whose class is the class specified by `className`.

`assumeInstanceOf(assumable,actual,metaClass)` assumes that `actual` is a MATLAB value whose class is the class specified by the `meta.class` instance `metaClass`.

`assumeInstanceOf( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`className`

Name of class, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyInstanceOf, and replace calls to `verifyInstanceOf` with `assumeInstanceOf`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsInstanceOf;
  assumable.assumeThat(actual, IsInstanceOf(className));
  assumable.assumeThat(actual, IsInstanceOf(metaClass));
  ```

  There exists more functionality when using the `IsInstanceOf` constraint directly via `assumeThat`.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeClass | assumeThat | `isa`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeLength

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value has specified length

Syntax

```
assumeLength(assumable,actual,expectedLength)
assumeLength(assumable,actual,expectedLength,diagnostic)
```

Description

`assumeLength(assumable,actual,expectedLength)` assumes that `actual` is a MATLAB array whose length is `expectedLength`.

`assumeLength(assumable,actual,expectedLength,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedLength`

The length of an array is defined as the largest dimension of that array.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyLength, and replace calls to `verifyLength` with `assumeLength`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasLength;
  assumable.assumeThat(actual, HasLength(expectedLength));
  ```

  There exists more functionality when using the `HasLength` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeNumElements | assumeSize | assumeThat | `length`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeLessThan

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is less than specified value

Syntax

```
assumeLessThan(assumable,actual,ceiling)
assumeLessThan(assumable,actual,ceiling,diagnostic)
```

Description

`assumeLessThan(assumable,actual,ceiling)` assumes that all elements of `actual` are less than all the elements of `ceiling`.

`assumeLessThan(assumable,actual,ceiling,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `ceiling` unless either one is scalar, at which point scalar expansion occurs.

Default:

`ceiling`

Maximum value, exclusive.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyLessThan, and replace calls to LessThan with `assumeLessThan`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsLessThan;
  assumable.assumeThat(actual, IsLessThan(ceiling));
  ```

  There exists more functionality when using the `IsLessThan` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsLessThan | matlab.unittest.diagnostics.Diagnostic | assumeGreaterThan | assumeGreaterThanOrEqual | assumeLessThanOrEqual | assumeThat | `lt`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeLessThanOrEqual

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is less than or equal to specified value

Syntax

```
assumeLessThanOrEqual(assumable,actual,ceiling)
assumeLessThanOrEqual(assumable,actual,ceiling,diagnostic)
```

Description

`assumeLessThanOrEqual(assumable,actual,ceiling)` assumes that all elements of `actual` are less than or equal to all the elements of `ceiling`.

`assumeLessThanOrEqual(assumable,actual,ceiling,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `ceiling` unless either one is scalar, at which point scalar expansion occurs.

Default:

`ceiling`

Maximum value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyLessThanOrEqual, and replace calls to `verifyLessThanOrEqual` with `assumeLessThanOrEqual`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsLessThanOrEqualTo;
  assumable.assumeThat(actual, IsLessThanOrEqualTo(ceiling));
  ```

  There exists more functionality when using the `IsLessThanOrEqualTo` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsLessThanOrEqualTo | matlab.unittest.diagnostics.Diagnostic | assumeGreaterThan | assumeGreaterThanOrEqual | assumeLessThan | assumeThat | `le`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeMatches

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume string matches specified regular expression

Syntax

```
assumeMatches(assumable,actual,expression)
assumeMatches(assumable,actual,expression,diagnostic)
```

Description

`assumeMatches(assumable,actual,expression)` assumes that `actual` is a string scalar or character vector that matches the regular expression defined by `expression`.

`assumeMatches(assumable,actual,expression,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The string to test.

Default:

`expression`

The value to match, specified as a regular expression.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyMatches, and replace calls to `verifyMatches` with `assumeMatches`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.Matches;
  assumable.assumeThat(actual, Matches(expression));
  ```

  There exists more functionality when using the `Matches` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeSubstring | assumeThat | `regexp`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeNotEmpty

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is not empty

Syntax

```
assumeNotEmpty(assumable,actual)
assumeNotEmpty(assumable,actual,diagnostic)
```

Description

`assumeNotEmpty(assumable,actual)` assumes that `actual` is a non-empty MATLAB value.

`assumeNotEmpty(assumable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNotEmpty, and replace calls to `verifyNotEmpty` with `assumeNotEmpty`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEmpty;
  assumable.assumeThat(actual, ~IsEmpty());
  ```

  There exists more functionality when using the `IsEmpty` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution

of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeEmpty | assumeThat | `isempty`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeNotEqual

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is not equal to specified value

Syntax

```
assumeNotEqual(assumable,actual,notExpected)
assumeNotEqual(assumable,actual,notExpected,diagnostic)
```

Description

`assumeNotEqual(assumable,actual,notExpected)` assumes that `actual` is not equal to `notExpected`.

`assumeNotEqual(assumable,actual,notExpected,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`notExpected`

Value to compare.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNotEqual, and replace calls to `verifyNotEqual` with `assumeNotEqual`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEqualTo;
  assumable.assumeThat(actual, ~IsEqualTo(notExpected));
  ```

  There exists more functionality when using the `IsEqualTo` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeEqual | assumeThat

Topics

"Types of Qualifications"

Introduced in R2013a

assumeNotSameHandle

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is not handle to specified instance

Syntax

```
assumeNotSameHandle(assumable,actual,notExpectedHandle)
assumeNotSameHandle(assumable,actual,notExpectedHandle,diagnostic)
```

Description

`assumeNotSameHandle(assumable,actual,notExpectedHandle)` assumes that `actual` is a different size and/or does not contain the same instances as the `notExpectedHandle` handle array.

`assumeNotSameHandle(assumable,actual,notExpectedHandle,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`notExpectedHandle`

The handle array to compare.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNotSameHandle, and replace calls to `verifyNotSameHandle` with `assumeNotSameHandle`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsSameHandleAs;
  assumable.assumeThat(actual, ~IsSameHandleAs(notExpectedHandle));
  ```

  There exists more functionality when using the `IsSameHandleAs` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeSameHandle | assumeThat

Topics

"Types of Qualifications"

Introduced in R2013a

assumeNumElements

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value has specified element count

Syntax

```
assumeNumElements(assumable,actual,expectedElementCount)
assumeNumElements(assumable,actual,expectedElementCount,diagnostic)
```

Description

`assumeNumElements(assumable,actual,expectedElementCount)` assumes that `actual` is a MATLAB array with `expectedElementCount` number of elements.

`assumeNumElements(assumable,actual,expectedElementCount,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedElementCount`

The expected number of elements in the array.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNumElements, and replace calls to `verifyNumElements` with `assumeNumElements`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasElementCount;
  assumable.assumeThat(actual, HasElementCount(expectedElementCount));
  ```

  There exists more functionality when using the `HasElementCount` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeLength | assumeSize | assumeThat | `numel`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeReturnsTrue

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume function returns true when evaluated

Syntax

```
assumeReturnsTrue(assumable,actual)
assumeReturnsTrue(assumable,actual,diagnostic)
```

Description

`assumeReturnsTrue(assumable,actual)` assumes that `actual` is a function handle that returns a scalar logical whose value is true.

`assumeReturnsTrue(assumable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyReturnsTrue, and replace calls to `verifyReturnsTrue` with `assumeReturnsTrue`.

Tips

- It is a shortcut for quick custom comparison functionality that can be defined quickly, and possibly inline. It can be preferable over simply evaluating the function directly and using `assumeTrue` because the function handle will be shown in the diagnostics, thus providing more insight into the failure condition which is lost when using `assumeTrue`.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.ReturnsTrue;
  assumable.assumeThat(actual, ReturnsTrue());
  ```

  There exists more functionality when using the `ReturnsTrue` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeThat | assumeTrue

Topics

"Types of Qualifications"

Introduced in R2013a

assumeSameHandle

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume two values are handles to same instance

Syntax

```
assumeSameHandle(assumable,actual,expectedHandle)
assumeSameHandle(assumable,actual,expectedHandle,diagnostic)
```

Description

`assumeSameHandle(assumable,actual,expectedHandle)` assumes that `actual` is the same size and contains the same instances as the `expectedHandle` handle array.

`assumeSameHandle(assumable,actual,expectedHandle,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedHandle`

The expected handle array.

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifySameHandle, and replace calls to `verifySameHandle` with `assumeSameHandle`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsSameHandleAs;
  assumable.assumeThat(actual, IsSameHandleAs(expectedHandle));
  ```

  There exists more functionality when using the `IsSameHandleAs` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

handle | assumeNotSameHandle | assumeThat

Topics

"Types of Qualifications"

Introduced in R2013a

assumeSize

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value has specified size

Syntax

```
assumeSize(assumable,actual,expectedSize)
assumeSize(assumable,actual,expectedSize,diagnostic)
```

Description

`assumeSize(assumable,actual,expectedSize)` assumes that `actual` is a MATLAB array whose size is `expectedSize`.

`assumeSize(assumable,actual,expectedSize,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedSize`

The expected sizes of each dimension the array.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifySize, and replace calls to `verifySize` with `assumeSize`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasSize;
  assumable.assumeThat(actual, HasSize(expectedSize));
  ```

  There exists more functionality when using the `HasSize` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeLength | assumeNumElements | assumeThat | `size`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeSubstring

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume string contains specified string

Syntax

```
assumeSubstring(assumable,actual,substring)
assumeSubstring(assumable,actual,substring,diagnostic)
```

Description

`assumeSubstring(assumable,actual,substring)` assumes that `actual` is a string scalar or character vector that contains `substring`.

`assumeSubstring(assumable,actual,substring,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`substring`

The value to match, specified as a string scalar or character vector.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifySubstring, and replace calls to `verifySubstring` with `assumeSubstring`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.ContainsSubstring;
  assumable.assumeThat(actual, ContainsSubstring(substring));
  ```

  There exists more functionality when using the `ContainsSubstring` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeMatches | assumeThat | `strfind`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeThat

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value meets specified constraint

Syntax

```
assumeThat(assumable,actual,constraint)
assumeThat(assumable,actual,constraint,diagnostic)
```

Description

`assumeThat(assumable,actual,constraint)` assumes that `actual` is a value that satisfies the `constraint` provided.

If the constraint is not satisfied, an assumption failure is produced utilizing only the framework diagnostic generated by the `constraint`.

`assumeThat(assumable,actual,constraint,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

When using this signature, both the diagnostic information contained within `diagnostic` is used in addition to the diagnostic information provided by the `constraint`.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`constraint`

Constraint that the actual value must satisfy to pass the verification, specified as a matlab.unittest.constraints instance.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyThat, and replace calls to `verifyThat` with `assumeThat`.

Tips

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

Topics

"Types of Qualifications"

Introduced in R2013a

assumeTrue

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume value is true

Syntax

```
assumeTrue(assumable,actual)
assumeTrue(assumable,actual,diagnostic)
```

Description

`assumeTrue(assumable,actual)` assumes that `actual` is a scalar logical with the value of true.

`assumeTrue(assumable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array

- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyTrue, and replace calls to `verifyTrue` with `assumeTrue`.

Tips

- This method passes if and only if the actual value is a scalar logical with a value of true. Therefore, entities such as true valued arrays and nonzero doubles produce qualification failures when used in this method, despite these entities exhibiting "true-like" behavior such as triggering the execution of code inside of "if" statements.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsTrue;
  assumable.assumeThat(actual, IsTrue());
  ```

  There exists more functionality when using the `IsTrue` constraint directly via `assumeThat`.

  Use of this method for performance benefits can come at the expense of less diagnostic information, and may not provide the same level of strictness adhered to by other constraints such as `IsEqualTo`. A similar approach that is generally less performant but can provide slightly better diagnostic information is the use of `assumeReturnsTrue`, which at least shows the display of the function evaluated to generate the failing result.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs

to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeFalse | assumeReturnsTrue | assumeThat

Topics

"Types of Qualifications"

Introduced in R2013a

assumeWarning

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume function issues specified warning

Syntax

```
assumeWarning(assumable,actual,warningID)
assumeWarning(assumable,actual,warningID,diagnostic)
[output1,...,outputN] = assumeWarning( ___ )
```

Description

`assumeWarning(assumable,actual,warningID)` assumes that `actual` issues a warning with the identifier `warningID`.

`assumeWarning(assumable,actual,warningID,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

`[output1,...,outputN] = assumeWarning( ___ )` also return the output arguments `output1,...,outputN` that are produced when invoking `actual`.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

`warningID`

Warning ID, specified as a character vector.

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Output Arguments

`output1,...,outputN`

Output arguments, 1 through n (if any), from `actual`, returned as any type. The argument type is specified by the `actual` argument list.

Examples

See examples for verifyWarning, and replace calls to `verifyWarning` with `assumeWarning`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IssuesWarnings;
  assumable.assumeThat(actual, IssuesWarnings({warningID}));
  ```

  There exists more functionality when using the `IssuesWarnings` constraint directly via `assumeThat`.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeError | assumeThat | assumeWarningFree | `warning`

Topics

"Types of Qualifications"

Introduced in R2013a

assumeWarningFree

Class: matlab.unittest.qualifications.Assumable
Package: matlab.unittest.qualifications

Assume function issues no warnings

Syntax

```
assumeWarningFree(assumable,actual)
assumeWarningFree(assumable,actual,diagnostic)
[output1,...,outputN] = assumeWarningFree( ___ )
```

Description

`assumeWarningFree(assumable,actual)` assumes that `actual` is a function handle that issues no warnings.

`assumeWarningFree(assumable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

`[output1,...,outputN] = assumeWarningFree( ___ )` also returns the output arguments `output1,...,outputN` that are produced when invoking `actual`.

Input Arguments

`assumable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the assumption in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Output Arguments

`output1,...,outputN`

Output arguments, 1 through n (if any), from `actual`, returned as any type. The argument type is specified by the `actual` argument list.

Examples

See examples for verifyWarningFree, and replace calls to `verifyWarningFree` with `assumeWarningFree`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IssuesNoWarnings;
  assumable.assumeThat(actual, IssuesNoWarnings());
  ```

  There exists more functionality when using the `IssuesNoWarnings` constraint directly via `assumeThat`.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. Alternatively,

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

assumeThat | assumeWarning | `warning`

Topics

"Types of Qualifications"

Introduced in R2013a

matlab.unittest.qualifications.AssumptionFailedException class

Package: matlab.unittest.qualifications

Exception used for assumption failures

Description

The `AssumptionFailedException` class provides an exception used for assumption failures. This class is used exclusively by the Assumable qualification type.

See Also

See Also

MException | Assumable

matlab.unittest.qualifications.ExceptionEventData class

Package: matlab.unittest.qualifications

Event data for ExceptionThrown event listeners

Description

The `ExceptionEventData` class holds event data for `ExceptionThrown` event listeners. `ExceptionThrown` event listeners are callback functions that you register with the testing framework to listen for the `TestRunner` to encounter an error during execution of test content. Typically, authors of custom plugins use this class. Only the test framework constructs this class directly.

Properties

`Exception`

Unexpected exception caught by `TestRunner` during its execution of test content

See Also

See Also

matlab.unittest.TestRunner | matlab.unittest.plugins.TestRunnerPlugin | MException

Introduced in R2014a

matlab.unittest.qualifications.FatalAssertable class

Package: matlab.unittest.qualifications

Qualification to abort test execution

Description

The `FatalAssertable` class provides a qualification to abort test execution. Apart from actions performed for failures, the `FatalAssertable` class works the same as `matlab.unittest` qualifications.

Upon a fatal assertion failure, the `FatalAssertable` class informs the testing framework of the failure by throwing a `FatalAssertionFailedException`. The test running framework then displays diagnostic information for the failure and aborts the entire test session. This is useful when the software under test contains so many errors that it does not make sense to continue the test session. Also, you can use fatal assertions in fixture teardown to guarantee the fixture state is restored correctly. If it is not restored, the full testing session will aborts and indicates to restart MATLAB before you resume testing. This allows later tests to run in a consistent MATLAB state. If you can recover the fixture teardown and make it "Exception Safe" on page 1-9255 for failures, use assertions instead.

Fatal assertions prevent false test failures due to the failure of a fundamental test. They also prevent false test failures when a prior test failed to restore test fixtures. If the test framework cannot properly tear down fixtures, restart MATLAB to ensure testing can resume in a clean state.

Methods

fatalAssertClass	Fatally assert exact class of specified value
fatalAssertEmpty	Fatally assert value is empty
fatalAssertEqual	Fatally assert value is equal to specified value
fatalAssertError	Fatally assert function throws specified exception

fatalAssertFail	Produce unconditional fatal assertion failure
fatalAssertFalse	Fatally assert value is false
fatalAssertGreaterThanOrEqual	Fatally assert value is greater than or equal to specified value
fatalAssertInstanceOf	Fatally assert value is object of specified type
fatalAssertLength	Fatally assert value has specified length
fatalAssertLessThan	Fatally assert value is less than specified value
fatalAssertLessThanOrEqual	Fatally assert value is less than or equal to specified value
fatalAssertMatches	Fatally assert string matches specified regular expression
fatalAssertNotEmpty	Fatally assert value is not empty
fatalAssertNotEqual	Fatally assert value is not equal to specified value
fatalAssertNotSameHandle	Fatally assert value is not handle to specified instance
fatalAssertNumElements	Fatally assert value has specified element count
fatalAssertReturnsTrue	Fatally assert function returns true when evaluated
fatalAssertSameHandle	Fatally assert two values are handles to same instance
fatalAssertSize	Fatally assert value has specified size
fatalAssertSubstring	Fatally assert string contains specified string
fatalAssertThat	Fatally assert value meets specified constraint
fatalAssertTrue	Fatally assert value is true
fatalAssertWarning	Fatally assert function issues specified warning

fatalAssertWarningFree	Fatally assert function issues no warnings

Events

`FatalAssertionFailed`	Triggered upon failing fatal assertion. A `QualificationEventData` object is passed to listener callback functions.
`FatalAssertionPassed`	Triggered upon passing fatal assertion. A `QualificationEventData` object is passed to listener callback functions.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Write Helper Function Using Fatal Assertions

A fatal assertion renders the remainder of the current test method invalid because the state is unrecoverable. A *helper function* is a function in the `TestCase` class but not located within any of the `methods` block statement. Execution of these functions is not controlled by the `matlab.unittest` framework.

Add the `DocPolynomSaveLoadTest.m` file to a folder on your MATLAB path. Refer to the helper function, `cleanUpTemporaryFolder`, in the `DocPolynomSaveLoadTest` test case.

DocPolynomSaveLoadTest Class Definition File

```
classdef DocPolynomSaveLoadTest < matlab.unittest.TestCase

    methods (TestClassSetup)
        function addDocPolynomClassToPath(testCase)
            origPath = path;
            testCase.addTeardown(@path, origPath);
            addpath(fullfile(matlabroot, ...
```

```
            'help', 'techdoc', 'matlab_oop', 'examples'));
    end
end

methods (Test)
    function testSaveLoad(testCase)

        import matlab.unittest.diagnostics.Diagnostic;

        %% Phase 1: Setup
        % Create a temporary working folder
        tempFolder = tempname;
        [success, message] = mkdir(tempFolder);
        testCase.assertTrue(success, ...
            Diagnostic.join('Could not create temporary folder.',...
            message));
        testCase.addTeardown(@() testCase.cleanUpTemporaryFolder(...
            tempFolder));

        % Change to the temporay folder and register the
        % teardown, which restores the original folder
        origFolder = pwd;
        testCase.addTeardown(@cd, origFolder);
        cd(tempFolder);

        %% Phase 2: Exercise
        % Save the instance to a mat file.
        p = DocPolynom([1, 0, 1]);
        save('DocPolynomFile', 'p');

        % Validate Precondition. Save resulted in valid .mat file
        testCase.assertEqual(exist('DocPolynomFile.mat','file'),...
            2, Diagnostic.join(...
            'mat file was not saved correctly.',@() dir(pwd)));

        loaded = load('DocPolynomFile');


        %% Phase 3: Verify
        testCase.verifyEqual(loaded.p, p,...
            'Loaded polynom did not equal original polynom.');


        %% Phase 4: Teardown
```

```
            % Done inline via calls to addTeardown at the points
            % at which the state was changed.


        end
    end

    methods(Access=private)
        function cleanUpTemporaryFolder(testCase,tempFolder)
            % Clean up the temporary folder and fatally assert
            % that it was correctly cleaned up.

            import matlab.unittest.diagnostics.Diagnostic;

            [success, message] = rmdir(tempFolder, 's');
            testCase.fatalAssertTrue(success, ...
                Diagnostic.join('Could not remove temporary folder.',...
                message));
        end
    end

end
```

Make the `cleanUpTemporaryFolder` function a helper function by placing it inside a separate `methods` block.

```
methods(Access=private)
    function cleanUpTemporaryFolder(testCase, tempFolder)
        % code
    end
end
```

Use the `fatalAssertTrue` method to test the `rmdir` `success` argument for errors. If a fatal assertion occurs, the test run is aborted.

```
function cleanUpTemporaryFolder(testCase, tempFolder)

    import matlab.unittest.diagnostics.Diagnostic

    [success, message] = rmdir(tempFolder, 's');
    testCase.fatalAssertTrue(success, ...
        Diagnostic.join('Could not remove the temporary folder.',...
        message))
end
```

If the `rmdir` function fails, then this test has failed to restore the state of MATLAB and the machine at initial startup. Aborting prevents subsequent tests to fail because MATLAB is left in an unexpected state by this test.

Definitions

Exception Safe

Test content is *exception safe* when all fixture teardown is performed with `addTeardown` or through the appropriate object destructors when a failure occurs. This ensures that the failure does not affect later testing due to stale fixtures.

This code is not exception safe. After an assertion failure, the test framework does not close the figure.

```
% Not exception safe
f = figure;
testCase.fatalAssertEqual(actual, expected)
close(f)
```

This code is exception safe because the test framework closes the figure in all cases.

```
% Exception safe
f = figure;
testCase.addTeardown(@close, f)
testCase.fatalAssertEqual(actual, expected)
```

However, tearing down a fixture using `addTeardown` does not guarantee code is exception safe. This code shows a failure in `fatalAssertEqual`.

```
% Not exception safe
f = figure;
testCase.fatalAssertEqual(actual, expected);
testCase.addTeardown(@close, f)
```

See Also

See Also

Assertable | Assumable | `matlab.unittest.qualifications` | QualificationEventData | TestCase | Verifiable

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertClass

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert exact class of specified value

Syntax

```
fatalAssertClass(fatalAssertable,actual,className)
fatalAssertClass(fatalAssertable,actual,metaClass)
fatalAssertClass( ___ ,diagnostic)
```

Description

`fatalAssertClass(fatalAssertable,actual,className)` fatally asserts that `actual` is a MATLAB value whose class is the class specified by `className`.

`fatalAssertClass(fatalAssertable,actual,metaClass)` fatally asserts that `actual` is a MATLAB value whose class is the class specified by the `meta.class` instance `metaClass`.

`fatalAssertClass( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`className`

Name of class, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyClass, and replace calls to `verifyClass` with `fatalAssertClass`.

Tips

- The method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsOfClass;
  fatalAssertable.fatalAssertThat(actual, IsOfClass(className));
  fatalAssertable.fatalAssertThat(actual, IsOfClass(metaClass));
  ```

  There exists more functionality when using the `IsOfClass` constraint directly via `fatalAssertThat`.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertInstanceOf | fatalAssertThat

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertEmpty

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is empty

Syntax

```
fatalAssertEmpty(fatalAssertable,actual)
fatalAssertEmpty(fatalAssertable,actual,diagnostic)
```

Description

`fatalAssertEmpty(fatalAssertable,actual)` fatally asserts that `actual` is an empty MATLAB value.

`fatalAssertEmpty(fatalAssertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array

- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyEmpty, and replace calls to `verifyEmpty` with `fatalAssertEmpty`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEmpty;
  fatalAssertable.fatalAssertThat(actual, IsEmpty());
  ```

  There exists more functionality when using the `IsEmpty` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertNotEmpty | fatalAssertThat | `isempty`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertEqual

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is equal to specified value

Syntax

```
fatalAssertEqual(fatalAssertable,actual,expected)
fatalAssertEqual( ___ ,Name,Value)
fatalAssertEqual( ___ ,diagnostic)
```

Description

`fatalAssertEqual(fatalAssertable,actual,expected)` fatally asserts that `actual` is strictly equal to `expected` .

`fatalAssertEqual( ___ ,Name,Value)` fatally asserts equality with additional options specified by one or more `Name,Value` pair arguments.

`fatalAssertEqual( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expected`

Expected value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'AbsTol'`

Absolute tolerance, specified as a numeric array. The tolerance is applied only to values of the same data type. The value can be a scalar or array the same size as the actual and expected values.

For an absolute tolerance to be satisfied, `abs(expected-actual) <= absTol` must be true.

Default:

`'RelTol'`

Relative tolerance, specified as a numeric array. The tolerance is applied only to values of the same data type. The value can be a scalar or array the same size as the actual and expected values.

For a relative tolerance to be satisfied, `abs(expected-actual) <= relTol.*abs(expected)` must be true.

Default:

Examples

See examples for verifyEqual, and replace calls to `verifyEqual` with `fatalAssertEqual`.

Tips

- This method is functionally equivalent to any of the following:

  ```
  import matlab.unittest.constraints.IsEqualTo;
  fatalAssertable.fatalAssertThat(actual, IsEqualTo(expected));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.AbsoluteTolerance;
  fatalAssertable.fatalAssertThat(actual, IsEqualTo(expected, ...
      'Within', AbsoluteTolerance(abstol)));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.RelativeTolerance;
  fatalAassertable.fatalAssertThat(actual, IsEqualTo(expected, ...
      'Within', RelativeTolerance(reltol)));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.AbsoluteTolerance;
  import matlab.unittest.constraints.RelativeTolerance;
  fatalAssertable.fatalAssertThat(actual, IsEqualTo(expected, ...
      'Within', AbsoluteTolerance(abstol) | RelativeTolerance(reltol)));
  ```

  There exists more functionality when using the `IsEqualTo`, `RelativeTolerance`, and `IsEqualTo` constraints directly via `fatalAssertThat`.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertNotEqual | fatalAssertThat

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertError

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert function throws specified exception

Syntax

```
fatalAssertError(fatalAssertable,actual,identifier)
fatalAssertError(fatalAssertable,actual,metaClass)
fatalAssertError( ___ ,diagnostic)
```

Description

`fatalAssertError(fatalAssertable,actual,identifier)` fatally asserts that `actual` is a function handle that throws an exception with an error identifier that is equal to `identifier`.

`fatalAssertError(fatalAssertable,actual,metaClass)` fatally asserts that `actual` is a function handle that throws an exception whose type is defined by the `meta.class` instance specified in `metaClass`. This method does not require the instance to be an exact class match, but rather it must be in the specified class hierarchy, and that hierarchy must include the `MException` class..

`fatalAssertError( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`identifier`

Error identifier, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyError, and replace calls to `verifyError` with `fatalAssertError`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.Throws;
  fatalAssertable.fatalAssertThat(actual, Throws(identifier));
  fatalAssertable.fatalAssertThat(actual, Throws(metaClass));
  ```

  There exists more functionality when using the `Throws` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture

teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

MException | `error` | fatalAssertThat | fatalAssertWarning

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertFail

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Produce unconditional fatal assertion failure

Syntax

```
fatalAssertFail(fatalAssertable)
fatalAssertFail(fatalAssertable,diagnostic)
```

Description

`fatalAssertFail(fatalAssertable)` produces an unconditional fatal assertion failure when encountered.

`fatalAssertFail(fatalAssertable,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyFail, and replace calls to `verifyFail` with `fatalAssertFail`.

Tips

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertFalse

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is false

Syntax

```
fatalAssertFalse(fatalAssertable,actual)
fatalAssertFalse(fatalAssertable,actual,diagnostic)
```

Description

`fatalAssertFalse(fatalAssertable,actual)` fatally asserts that `actual` is a scalar logical with the value of false.

`fatalAssertFalse(fatalAssertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyFalse, and replace calls to `verifyFalse` with `fatalAssertFalse`.

Tips

- This method passes if and only if the actual value is a scalar logical with a value of false. Therefore, entities such as empty arrays, false valued arrays, and zero doubles produce failures when used in this method, despite these entities exhibiting "false-like" behavior such as bypassing the execution of code inside of "if" statements.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsFalse;
  fatalAssertable.fatalAssertThat(actual, IsFalse());
  ```

  There exists more functionality when using the `IsFalse` constraint directly via `fatalAssertThat`.
- Unlike `fatalAssertTrue`, this method may create a new constraint for each call. For performance critical uses, consider using `fatalAssertTrue`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the

current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertThat | fatalAssertTrue

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertGreaterThan

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is greater than specified value

Syntax

```
fatalAssertGreaterThan(fatalAssertable,actual,floor)
fatalAssertGreaterThan(fatalAssertable,actual,floor,diagnostic)
```

Description

`fatalAssertGreaterThan(fatalAssertable,actual,floor)` fatally asserts that all elements of `actual` are greater than all the elements of `floor`.

`fatalAssertGreaterThan(fatalAssertable,actual,floor,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `floor` unless either one is scalar, at which point scalar expansion occurs.

`floor`

Minimum value, exclusive.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Default:

Examples

See examples for verifyGreaterThan, and replace calls to `verifyGreaterThan` with `fatalAssertGreaterThan`.

Tips

- This method is functionally equivalent to:

  ```
  matlab.unittest.constraints.IsGreaterThan;
  fatalAssertable.fatalAssertThat(actual, IsGreaterThan(floor));
  ```

  There exists more functionality when using the `IsGreaterThan` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the

current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

matlab.unittest.constraints.IsGreaterThan | matlab.unittest.diagnostics.Diagnostic | fatalAssertGreaterThanOrEqual | fatalAssertLessThan | fatalAssertLessThanOrEqual | fatalAssertThat | `gt`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertGreaterThanOrEqual

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is greater than or equal to specified value

Syntax

```
fatalAssertGreaterThanOrEqual(fatalAssertable,actual,floor)
fatalAssertGreaterThanOrEqual(fatalAssertable,actual,floor,
diagnostic)
```

Description

`fatalAssertGreaterThanOrEqual(fatalAssertable,actual,floor)` fatally asserts that all elements of `actual` are greater than or equal to all the elements of `floor`.

`fatalAssertGreaterThanOrEqual(fatalAssertable,actual,floor, diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `floor` unless either one is scalar, at which point scalar expansion occurs.

`floor`

Minimum value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyGreaterThanOrEqual, and replace calls to `verifyGreaterThanOrEqual` with `fatalAssertGreaterThanOrEqual`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsGreaterThanOrEqualTo;
  fatalAssertable.fatalAssertThat(actual, IsGreaterThanOrEqualTo(floor));
  ```

  There exists more functionality when using the `IsGreaterThanOrEqualTo` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the

current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

matlab.unittest.constraints.IsGreaterThanOrEqualTo | matlab.unittest.diagnostics.Diagnostic | fatalAssertGreaterThan | fatalAssertLessThan | fatalAssertLessThanOrEqual | fatalAssertThat | `ge`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertInstanceOf

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is object of specified type

Syntax

```
fatalAssertInstanceOf(fatalAssertable,actual,className)
fatalAssertInstanceOf(fatalAssertable,actual,metaClass)
fatalAssertInstanceOf( ___ ,diagnostic)
```

Description

`fatalAssertInstanceOf(fatalAssertable,actual,className)` fatally asserts that `actual` is a MATLAB value whose class is the class specified by `className`.

`fatalAssertInstanceOf(fatalAssertable,actual,metaClass)` fatally asserts that `actual` is a MATLAB value whose class is the class specified by the `meta.class` instance `metaClass`.

`fatalAssertInstanceOf( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`className`

Name of class, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyInstanceOf, and replace calls to `verifyInstanceOf` with `fatalAssertInstanceOf`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsInstanceOf;
  fatalAssertable.fatalAssertThat(actual, IsInstanceOf(className));
  fatalAssertable.fatalAssertThat(actual, IsInstanceOf(metaClass));
  ```

  There exists more functionality when using the `IsInstanceOf` constraint directly via `fatalAssertThat`.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertClass | fatalAssertThat | `isa`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertLength

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value has specified length

Syntax

```
fatalAssertLength(fatalAssertable,actual,expectedLength)
fatalAssertLength(fatalAssertable,actual,expectedLength,diagnostic)
```

Description

`fatalAssertLength(fatalAssertable,actual,expectedLength)` fatally asserts that `actual` is a MATLAB array whose length is `expectedLength`.

`fatalAssertLength(fatalAssertable,actual,expectedLength,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedLength`

The length of an array is defined as the largest dimension of that array.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyLength, and replace calls to `verifyLength` with `fatalAssertLength`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasLength;
  fatalAssertable.fatalAssertThat(actual, HasLength(expectedLength));
  ```

  There exists more functionality when using the `HasLength` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertNumElements | fatalAssertSize | fatalAssertThat | `length`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertLessThan

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is less than specified value

Syntax

```
fatalAssertLessThan(fatalAssertable,actual,ceiling)
fatalAssertLessThan(fatalAssertable,actual,ceiling,diagnostic)
```

Description

`fatalAssertLessThan(fatalAssertable,actual,ceiling)` fatally asserts that all elements of `actual` are less than all the elements of `ceiling`.

`fatalAssertLessThan(fatalAssertable,actual,ceiling,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `ceiling` unless either one is scalar, at which point scalar expansion occurs.

Default:

`ceiling`

Maximum value, exclusive.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyLessThan, and replace calls to `verifyLessThan` with `fatalAssertLessThan`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsLessThan;
  assertable.assertThat(actual, IsLessThan(ceiling));
  ```

  There exists more functionality when using the `IsLessThan` constraint directly via `assertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the

current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

matlab.unittest.constraints.IsLessThan | matlab.unittest.diagnostics.Diagnostic | fatalAssertGreaterThan | fatalAssertGreaterThanOrEqual | fatalAssertLessThanOrEqual | fatalAssertThat | `lt`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertLessThanOrEqual

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is less than or equal to specified value

Syntax

```
fatalAssertLessThanOrEqual(fatalAssertable,actual,ceiling)
fatalAssertLessThanOrEqual(fatalAssertable,actual,ceiling,
diagnostic)
```

Description

`fatalAssertLessThanOrEqual(fatalAssertable,actual,ceiling)` fatally asserts that all elements of `actual` are less than or equal to all the elements of `ceiling`.

`fatalAssertLessThanOrEqual(fatalAssertable,actual,ceiling, diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `ceiling` unless either one is scalar, at which point scalar expansion occurs.

Default:

`actual`

The value to test.

Default:

`ceiling`

Maximum value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyLessThanOrEqual, and replace calls to `verifyLessThanOrEqual` with `fatalAssertLessThanOrEqual`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsLessThanOrEqualTo;
  fatalAssertable.fatalAssertThat(actual, IsLessThanOrEqualTo(ceiling));
  ```

  There exists more functionality when using the `IsLessThanOrEqualTo` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

matlab.unittest.constraints.IsLessThanOrEqualTo | matlab.unittest.diagnostics.Diagnostic | fatalAssertGreaterThan | fatalAssertGreaterThanOrEqual | fatalAssertLessThan | fatalAssertThat | `le`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertMatches

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert string matches specified regular expression

Syntax

```
fatalAssertMatches(fatalAssertable,actual,expression)
fatalAssertMatches(fatalAssertable,actual,expression,diagnostic)
```

Description

`fatalAssertMatches(fatalAssertable,actual,expression)` fatally asserts that `actual` is a string scalar or character vector that matches the regular expression defined by `expression`.

`fatalAssertMatches(fatalAssertable,actual,expression,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expression`

The value to match, specified as a regular expression.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyMatches, and replace calls to `verifyMatches` with `fatalAssertMatches`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.Matches;
  fatalAssertable.fatalAssertThat(actual, Matches(expression));
  ```

  There exists more functionality when using the `Matches` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the

current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertSubstring | fatalAssertThat | `regexp`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertNotEmpty

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is not empty

Syntax

```
fatalAssertNotEmpty(fatalAssertable,actual)
fatalAssertNotEmpty(fatalAssertable,actual,diagnostic)
```

Description

`fatalAssertNotEmpty(fatalAssertable,actual)` fatally asserts that `actual` is a non-empty MATLAB value.

`fatalAssertNotEmpty(fatalAssertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array

- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNotEmpty, and replace calls to `verifyNotEmpty` with `fatalAssertNotEmpty`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEmpty;
  fatalAssertable.fatalAssertThat(actual, ~IsEmpty());
  ```

  There exists more functionality when using the `IsEmpty` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for

violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertEmpty | fatalAssertThat | `isempty`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertNotEqual

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is not equal to specified value

Syntax

```
fatalAssertNotEqual(fatalAssertable,actual,notExpected)
fatalAssertNotEqual(fatalAssertable,actual,notExpected,diagnostic)
```

Description

`fatalAssertNotEqual(fatalAssertable,actual,notExpected)` fatally asserts that `actual` is not equal to `notExpected`.

`fatalAssertNotEqual(fatalAssertable,actual,notExpected,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`notExpected`

Value to compare.

Default:

Examples

See examples for verifyNotEqual, and replace calls to `verifyNotEqual` with `fatalAssertNotEqual`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEqualTo;
  fatalAssertable.fatalAssertThat(actual, ~IsEqualTo(notExpected));
  ```

  There exists more functionality when using the `IsEqualTo` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures

result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertEqual | fatalAssertThat

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertNotSameHandle

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is not handle to specified instance

Syntax

```
fatalAssertNotSameHandle(fatalAssertable,actual,notExpectedHandle)
fatalAssertNotSameHandle(fatalAssertable,actual,notExpectedHandle,
diagnostic)
```

Description

`fatalAssertNotSameHandle(fatalAssertable,actual,notExpectedHandle)` fatally asserts that `actual` is a different size and/or does not contain the same instances as the `notExpectedHandle` handle array.

`fatalAssertNotSameHandle(fatalAssertable,actual,notExpectedHandle, diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`notExpectedHandle`

The handle array to compare.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNotSameHandle, and replace calls to `verifyNotSameHandle` with `fatalAssertNotSameHandle`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsSameHandleAs;
  fatalAssertable.fatalAssertThat(actual, ~IsSameHandleAs(notExpectedHandle));
  ```

  There exists more functionality when using the `IsSameHandleAs` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the

current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertSameHandle | fatalAssertThat

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertNumElements

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value has specified element count

Syntax

```
fatalAssertNumElements(fatalAssertable,actual,expectedElementCount)
fatalAssertNumElements(fatalAssertable,actual,expectedElementCount,
diagnostic)
```

Description

`fatalAssertNumElements(fatalAssertable,actual,expectedElementCount)` fatally asserts that `actual` is a MATLAB array with `expectedElementCount` number of elements.

`fatalAssertNumElements(fatalAssertable,actual,expectedElementCount, diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedElementCount`

The expected number of elements in the array.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyNumElements, and replace calls to `verifyNumElements` with `fatalAssertNumElements`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasElementCount;
  fatalAssertable.fatalAssertThat(actual, HasElementCount(expectedElementCount));
  ```

  There exists more functionality when using the `HasElementCount` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the

current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertLength | fatalAssertSize | fatalAssertThat | `numel`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertReturnsTrue

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert function returns true when evaluated

Syntax

```
fatalAssertReturnsTrue(fatalAssertable,actual)
fatalAssertReturnsTrue(fatalAssertable,actual,diagnostic)
```

Description

`fatalAssertReturnsTrue(fatalAssertable,actual)` fatally asserts that `actual` is a function handle that returns a scalar logical whose value is true.

`fatalAssertReturnsTrue(fatalAssertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array

- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyReturnsTrue, and replace calls to `verifyReturnsTrue` with `fatalAssertReturnsTrue`.

Tips

- It is a shortcut for quick custom comparison functionality that can be defined quickly, and possibly inline. It can be preferable over simply evaluating the function directly and using `fatalAssertTrue` because the function handle will be shown in the diagnostics, thus providing more insight into the failure condition which is lost when using `fatalAssertTrue`.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.ReturnsTrue;
  fatalAssertable.fatalAssertThat(actual, ReturnsTrue());
  ```

  There exists more functionality when using the `ReturnsTrue` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertThat | fatalAssertTrue

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertSameHandle

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert two values are handles to same instance

Syntax

```
fatalAssertSameHandle(fatalAssertable,actual,expectedHandle)
fatalAssertSameHandle(fatalAssertable,actual,expectedHandle,
diagnostic)
```

Description

`fatalAssertSameHandle(fatalAssertable,actual,expectedHandle)` fatally asserts that `actual` is the same size and contains the same instances as the `expectedHandle` handle array.

`fatalAssertSameHandle(fatalAssertable,actual,expectedHandle, diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedHandle`

The expected handle array.

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifySameHandle, and replace calls to `verifySameHandle` with `fatalAssertSameHandle`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsSameHandleAs;
  fatalAssertable.fatalAssertThat(actual, IsSameHandleAs(expectedHandle));
  ```

  There exists more functionality when using the `IsSameHandleAs` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

handle | fatalAssertNotSameHandle | fatalAssertThat

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertSize

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value has specified size

Syntax

```
fatalAssertSize(fatalAssertable,actual,expectedSize)
fatalAssertSize(fatalAssertable,actual,expectedSize,diagnostic)
```

Description

`fatalAssertSize(fatalAssertable,actual,expectedSize)` fatally asserts that `actual` is a MATLAB array whose size is `expectedSize`.

`fatalAssertSize(fatalAssertable,actual,expectedSize,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedSize`

The expected sizes of each dimension the array.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifySize, and replace calls to `verifySize` with `fatalAssertSize`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasSize;
  fatalAssertable.fatalAssertThat(actual, HasSize(expectedSize));
  ```

  There exists more functionality when using the `HasSize` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertLength | fatalAssertNumElements | fatalAssertThat | `size`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertSubstring

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert string contains specified string

Syntax

```
fatalAssertSubstring(fatalAssertable,actual,substring)
fatalAssertSubstring(fatalAssertable,actual,substring,diagnostic)
```

Description

`fatalAssertSubstring(fatalAssertable,actual,substring)` fatally asserts that `actual` is a string scalar or character vector that contains `substring`.

`fatalAssertSubstring(fatalAssertable,actual,substring,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`substring`

The value to match, specified as a string scalar or character vector.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifySubstring, and replace calls to `verifySubstring` with `fatalAssertSubstring`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.ContainsSubstring;
  fatalAssertable.fatalAssertThat(actual,...
  ContainsSubstring(substring));
  ```

  There exists more functionality when using the `ContainsSubstring` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertMatches | fatalAssertThat | `strfind`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertThat

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value meets specified constraint

Syntax

```
fatalAssertThat(fatalAssertable,actual,constraint)
fatalAssertThat(fatalAssertable,actual,constraint,diagnostic)
```

Description

`fatalAssertThat(fatalAssertable,actual,constraint)` fatally asserts that `actual` is a value that satisfies the `constraint` provided.

If the constraint is not satisfied, a fatal assertion failure is produced utilizing only the framework diagnostic generated by the `constraint`.

`fatalAssertThat(fatalAssertable,actual,constraint,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

When using this signature, both the diagnostic information contained within `diagnostic` is used in addition to the diagnostic information provided by the `constraint`.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`constraint`

Constraint that the actual value must satisfy to pass the verification, specified as a matlab.unittest.constraints instance.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyThat, and replace calls to `verifyThat` with `fatalAssertThat`.

Tips

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertTrue

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert value is true

Syntax

```
fatalAssertTrue(fatalAssertable,actual)
fatalAssertTrue(fatalAssertable,actual,diagnostic)
```

Description

`fatalAssertTrue(fatalAssertable,actual)` fatally asserts that `actual` is a scalar logical with the value of true.

`fatalAssertTrue(fatalAssertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array

- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

See examples for verifyTrue, and replace calls to `verifyTrue` with `fatalAssertTrue`.

Tips

- This method passes if and only if the actual value is a scalar logical with a value of true. Therefore, entities such as true valued arrays and nonzero doubles produce qualification failures when used in this method, despite these entities exhibiting "true-like" behavior such as triggering the execution of code inside of "if" statements.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsTrue;
  fatalAssertable.fatalAssertThat(actual, IsTrue());
  ```

  There exists more functionality when using the `IsTrue` constraint directly via `fatalAssertThat`.

  However, this method is optimized for performance and does not construct a new `IsTrue` constraint for each call. Sometimes such use can come at the expense of less diagnostic information. Use the `fatalAssertReturnsTrue` method for a similar approach which may provide better diagnostic information.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution

of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertFalse | fatalAssertReturnsTrue | fatalAssertThat

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertWarning

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert function issues specified warning

Syntax

```
fatalAssertWarning(fatalAssertable,actual,warningID)
fatalAssertWarning(fatalAssertable,actual,warningID,diagnostic)
[output1,...,outputN] = fatalAssertWarning( ___ )
```

Description

`fatalAssertWarning(fatalAssertable,actual,warningID)` fatally asserts that `actual` issues a warning with the identifier `warningID`.

`fatalAssertWarning(fatalAssertable,actual,warningID,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

`[output1,...,outputN] = fatalAssertWarning( ___ )` also returns the output arguments `output1,...,outputN` that are produced when invoking `actual`.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

warningID

Warning ID, specified as a character vector.

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Output Arguments

output1,...,outputN

Output arguments, 1 through n (if any), from `actual`, returned as any type. The argument type is specified by the `actual` argument list.

Examples

See examples for verifyWarning, and replace calls to `verifyWarning` with `fatalAssertWarning`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IssuesWarnings;
  fatalAssertable.fatalAssertThat(actual, IssuesWarnings({warningID}));
  ```

  There exists more functionality when using the `IssuesWarnings` constraint directly via `fatalAssertThat`.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertError | fatalAssertThat | fatalAssertWarningFree | `warning`

Topics

"Types of Qualifications"

Introduced in R2013a

fatalAssertWarningFree

Class: matlab.unittest.qualifications.FatalAssertable
Package: matlab.unittest.qualifications

Fatally assert function issues no warnings

Syntax

```
fatalAssertWarningFree(fatalAssertable,actual)
fatalAssertWarningFree(fatalAssertable,actual,diagnostic)
[output1,...,outputN] = fatalAssertWarningFree( ___ )
```

Description

`fatalAssertWarningFree(fatalAssertable,actual)` fatally asserts that `actual` is a function handle that issues no warnings.

`fatalAssertWarningFree(fatalAssertable,actual,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

`[output1,...,outputN] = fatalAssertWarningFree( ___ )` also returns the output arguments `output1,...,outputN` that are produced when invoking `actual`.

Input Arguments

`fatalAssertable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the fatal assertion in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Output Arguments

`output1,...,outputN`

Output arguments, 1 through n (if any), from `actual`, returned as any type. The argument type is specified by the `actual` argument list.

Examples

See examples for verifyWarningFree, and replace calls to `verifyWarningFree` with `fatalAssertWarningFree`.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IssuesNoWarnings;
  fatalAssertable.fatalAssertThat(actual, IssuesNoWarnings());
  ```

  There exists more functionality when using the `IssuesNoWarnings` constraint directly via `fatalAssertThat`.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture

teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. Alternatively,

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. For more information, see matlab.unittest.qualifications.Verifiable.
- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

See Also

See Also

fatalAssertThat | fatalAssertWarning | `warning`

Topics

"Types of Qualifications"

Introduced in R2013a

matlab.unittest.qualifications.FatalAssertionFailedException class

Package: matlab.unittest.qualifications

Exception used for fatal assertion failures

Description

The `FatalAssertionFailedException` class provides an exception used for fatal assertion failures. This class is used exclusively by the FatalAssertable qualification type.

See Also

See Also

MException | FatalAssertable

matlab.unittest.qualifications.QualificationEventData class

Package: matlab.unittest.qualifications

Event data for qualification event listeners

Description

The `QualificationEventData` class holds event data for qualification event listeners. Qualification event listeners are callback functions that you register with the testing framework to listen for passing and/or failing qualifications. Qualifications can be assertions, fatal assertions, assumptions, or verifications performed on test content. The corresponding qualification classes define these events. Typically, authors of custom plugins use this class. Only the test framework constructs this class directly.

Properties

`ActualValue`

Value tested to satisfy the qualification logic of the `Constraint`.

`Constraint`

Instance of `matlab.unittest.constraints.Constraint` used for the qualification

When you use a qualification method on a `TestCase` or `Fixture` object, the `Constraint` property contains the underlying constraint used for the qualification. For example, if you use the `verifyEqual` method, the underlying constraint is the `IsEqualTo` constraint. Therefore, if you invoke the constraint's `getDiagnosticFor` method, the diagnostic result can appear different than what the test framework displays.

`TestDiagnostic`

Diagnostic specified in the qualification, represented as a character vector, string, function handle, or instance of the `Diagnostic` class.

`TestDiagnosticResults`

Result of diagnostic specified in the qualification, represented as an array of `DiagnosticResult` instances.

`FrameworkDiagnosticResults`

Result of diagnostic from constraint used for the qualification, represented as an array of `DiagnosticResult` instances.

`Stack`

Function call stack leading up to the qualification event, represented as a structure array.

See Also

See Also

matlab.unittest.qualifications.Assertable | matlab.unittest.qualifications.Assumable | matlab.unittest.qualifications.FatalAssertable | matlab.unittest.qualifications.Verifiable | matlab.unittest.fixtures.Fixture | matlab.unittest.diagnostics.DiagnosticResult

Introduced in R2014a

matlab.unittest.qualifications.Verifiable class

Package: matlab.unittest.qualifications

Qualification to produce soft failure conditions

Description

The `Verifiable` class provides a qualification to produce soft-failure conditions. Apart from actions performed for failures, the `Verifiable` class works the same as other `matlab.unittest` qualifications.

Upon a verification failure, the `Verifiable` class informs the testing framework of the failure, including all diagnostic information associated with the failure, but continues to execute the currently running test without throwing an `MException`. This is most useful when a failure at the verification point is not fatal to the remaining test content. Often, you use verifications as the primary verification of a Four-Phase Test. Use other qualification types, such as assertions, fatal assertions, and assumptions, to test for violation of preconditions or incorrect test setup.

Since verifications do not throw `MExecptions`, all test content runs to completion even when verification failures occur. This helps you understand how close a piece of software is to meeting the test suite requirements. Qualification types that throw exceptions do not provide this insight, since once an exception is thrown an arbitrary amount of code remains that is not reached or exercised. Verifications also provide more testing coverage in failure conditions. However, when you overuse verifications, they can produce excess noise for a single failure condition. If a failure condition will cause later qualification points to also fail, use assertions or fatal assertions instead.

Methods

verifyClass	Verify exact class of specified value
verifyEmpty	Verify value is empty
verifyEqual	Verify value is equal to specified value
verifyError	Verify function throws specified exception
verifyFail	Produce unconditional verification failure

verifyFalse	Verify value is false
verifyGreaterThan	Verify value is greater than specified value
verifyGreaterThanOrEqual	Verify value is greater than or equal to specified value
verifyInstanceOf	Verify value is object of specified type
verifyLength	Verify value has specified length
verifyLessThan	Verify value is less than specified value
verifyLessThanOrEqual	Verify value is less than or equal to specified value
verifyMatches	Verify string matches specified regular expression
verifyNotEmpty	Verify value is not empty
verifyNotEqual	Verify value is not equal to specified value
verifyNotSameHandle	Verify value is not handle to specified instance
verifyNumElements	Verify value has specified element count
verifyReturnsTrue	Verify function returns true when evaluated
verifySameHandle	Verify two values are handles to same instance
verifySize	Verify value has specified size
verifySubstring	Verify string contains specified string
verifyThat	Verify value meets given constraint
verifyTrue	Verify value is true
verifyWarning	Verify function issues specified warning
verifyWarningFree	Verify function issues no warnings

Events

`VerificationFailed`	Triggered upon failing verification. A `QualificationEventData` object is passed to listener callback functions.

`VerificationPassed`	Triggered upon passing verification. A `QualificationEventData` object is passed to listener callback functions.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Write Test Methods Using Verifications

Verifications produce and record failures without throwing an exception, meaning the currently running test runs to completion. This example creates a test case to verify arithmetic operations on objects of the `DocPolynom` example class.

Create the `DocPolynomTest` Test Case. Refer to the following `DocPolynomTest` test case in the subsequent steps in this example, which highlight specific functions in the file.

DocPolynomTest Class Definition File

```
classdef DocPolynomTest < matlab.unittest.TestCase
    % Tests the DocPolynom class.

   properties
      msgEqn = 'Equation under test: ';
   end

   methods (TestClassSetup)
        function addDocPolynomClassToPath(testCase)
            testCase.addTeardown(@path,addpath(fullfile(matlabroot,...
                'help', 'techdoc', 'matlab_oop', 'examples')))
        end
    end

    methods (Test)
        function testConstructor(testCase)
            p = DocPolynom([1, 0, 1]);
```

```
            testCase.verifyClass(p, ?DocPolynom)
        end

        function testAddition(testCase)
            p1 = DocPolynom([1, 0, 1]);
            p2 = DocPolynom([5, 2]);

            actual = p1 + p2;
            expected = DocPolynom([1, 5, 3]);

            msg = [testCase.msgEqn,...
                '(x^2 + 1) + (5*x + 2) = x^2 + 5*x + 3'];
            testCase.verifyEqual(actual, expected, msg)
        end

        function testMultiplication(testCase)
            p1 = DocPolynom([1, 0, 3]);
            p2 = DocPolynom([5, 2]);

            actual = p1 * p2;
            expected = DocPolynom([5, 2, 15, 6]);

            msg = [testCase.msgEqn,...
                '(x^2 + 3) * (5*x + 2) = 5*x^3 + 2*x^2 + 15*x + 6'];
            testCase.verifyEqual(actual, expected, msg)
        end

    end
end
```

To execute the MATLAB commands in this example, add the `DocPolynomTest.m` file to a folder on your MATLAB path.

Write Test to Verify Constructor. Create a function, `testConstructor`, using the `verifyClass` method to test the `DocPolynom` class constructor.

```
function testConstructor(testCase)
    p = DocPolynom([1, 0, 1]);
    testCase.verifyClass(p, ?DocPolynom)
end
```

Write Tests to Verify Operations. In the `testAddition` function, use the `verifyEqual` method to test the equation `(x^2 + 1) + (5*x + 2) = x^2 + 5*x + 3`. The `verifyEqual` method includes this equation in the `diagnostic` argument.

```
function testAddition(testCase)
    p1 = DocPolynom([1, 0, 1]);
    p2 = DocPolynom([5, 2]);

    actual = p1 + p2;
    expected = DocPolynom([1, 5, 3]);

    msg = [testCase.msgEqn,...
        '(x^2 + 1) + (5*x + 2) = x^2 + 5*x + 3'];
    testCase.verifyEqual(actual, expected, msg)
end
```

The function, `testMultiplication`, tests multiplication operations.

Run the tests in the `DocPolynomTest` test case.

```
tc = DocPolynomTest;
ts = matlab.unittest.TestSuite.fromClass(?DocPolynomTest);
res = run(ts);
```

```
Running DocPolynomTest
...
Done DocPolynomTest
__________
```

All tests passed.

See Also

See Also

Assertable | Assumable | FatalAssertable | `matlab.unittest.qualifications` | QualificationEventData | TestCase

Topics

"Types of Qualifications"

External Websites

Four-Phase Test

Introduced in R2013a

verifyClass

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify exact class of specified value

Syntax

```
verifyClass(verifiable,actual,className)
verifyClass(verifiable,actual,metaClass)
verifyClass( ___ ,diagnostic)
```

Description

`verifyClass(verifiable,actual,className)` verifies that `actual` is a MATLAB value whose class is the class specified by `className`.

`verifyClass(verifiable,actual,metaClass)` verifies that `actual` is a MATLAB value whose class is the class specified by the `meta.class` instance `metaClass`. The instance must be an exact class match. Use `verifyInstanceOf` to verify inclusion in a class hierarchy.

`verifyClass( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`className`

Name of class, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test a Class

These interactive tests verify the class of the number, 5.

Create a `TestCase` object and the value to test.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
actvalue = 5;
```

Verify class of `actvalue` is double.

```
verifyClass(testCase, actvalue, 'double');
```

```
Interactive verification passed.
```

Verify class of `actvalue` is char.

```
verifyClass(testCase, actvalue, 'char');
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyClass failed.
--> The value's class is incorrect.

    Actual Class:
        double
    Expected Class:
        char

Actual double:
         5
```

Test fails.

Test a Function Handle

These interactive tests verify function handles, specified as a meta.class instance, `?function_handle`.

Create a `TestCase` object.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Create a function handle.

```
fh = @sin;
verifyClass(testCase, fh, ?function_handle);
```

```
Interactive verification passed.
```

Test the function name.

```
fh = 'sin';
verifyClass(testCase, fh, ?function_handle);
```

```
Interactive verification failed.
```

```
---------------------
Framework Diagnostic:
---------------------
verifyClass failed.
--> The value's class is incorrect.

    Actual Class:
        char
    Expected Class:
        function_handle

Actual char:
    sin
```

Test fails.

Test a Derived Class

Verify that a derived class is not the same class as its base class.

Create a class, `BaseExample`.

```
classdef BaseExample
end
```

Create a derived class, `DerivedExample`.

```
classdef DerivedExample < BaseExample
end
```

Verify the classes are not equal.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyClass(testCase, DerivedExample(), ?BaseExample);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyClass failed.
```

```
--> The value's class is incorrect.

    Actual Class:
        DerivedExample
    Expected Class:
        BaseExample

Actual DerivedExample:
      DerivedExample with no properties.
```

Test fails.

Test Class of Output Value

Use `verifyClass` to test the `add5` function returns a `double` value.

Function for unit testing:

```
type add5.m
```

```
function res = add5(x)
% ADD5 Increment input by 5.
if ~isa(x,'numeric')
    error('add5:InputMustBeNumeric','Input must be numeric.')
end
res = x + 5;
end
```

`TestCase` class containing test methods:

```
type Add5Test.m
```

```
classdef Add5Test < matlab.unittest.TestCase
    methods (Test)
        function testDoubleOut(testCase)
            actOutput = add5(1);
            testCase.verifyClass(actOutput,'double')
        end
        function testNonNumericInput(testCase)
            testCase.verifyError(@()add5('0'),'add5:InputMustBeNumeric')
        end
    end
end
```

Create a test suite from the `Add5Test` class file.

```
suite = matlab.unittest.TestSuite.fromFile('Add5Test.m')
```

Run the tests.

```
result = run(suite);
```

Tips

- The method is functionally equivalent to the following methods:

  ```
  import matlab.unittest.constraints.IsOfClass;
  verifiable.verifyThat(actual, IsOfClass(className));
  verifiable.verifyThat(actual, IsOfClass(metaClass));
  ```

  There exists more functionality when using the `IsOfClass` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsOfClass | matlab.unittest.diagnostics.Diagnostic | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyInstanceOf | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyEmpty

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is empty

Syntax

```
verifyEmpty(verifiable,actual)
verifyEmpty( ___ ,diagnostic)
```

Description

`verifyEmpty(verifiable,actual)` verifies that `actual` is an empty MATLAB value.

`verifyEmpty( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array

- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test for Empty Character Vectors

Create a `TestCase` object.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Verify the emtpy character.

```
verifyEmpty(testCase, '');
```

```
Interactive verification passed.
```

Test for Empty Arrays

An array with any zero dimension is empty.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyEmpty(testCase, ones(2, 5, 0, 3));
```

```
Interactive verification passed.
```

```
verifyEmpty(testCase, [2 3], 'Array is not empty.');
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------
Array is not empty.

---------------------
Framework Diagnostic:
---------------------
verifyEmpty failed.
--> The value must be empty.
```

```
--> The value has a size of [1  2].

Actual double:
         2     3
```

Test failed.

Test for Empty Cell Arrays

Test empty cell array.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyEmpty(testCase,{},'Cell array is not empty.');
```

```
Interactive verification passed.
```

A cell array of empty arrays is not empty.

```
verifyEmpty(testCase,{[],[],[]},'Cell array is not empty.');
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------
Cell array is not empty.

---------------------
Framework Diagnostic:
---------------------
verifyEmpty failed.
--> The value must be empty.
--> The value has a size of [1  3].

Actual cell:
        []    []    []
```

Test for Empty Test Suite

Test for empty object, `emptyTestSuite`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
emptyTestSuite = matlab.unittest.TestSuite.empty;
verifyEmpty(testCase, emptyTestSuite)
```

```
Interactive verification passed.
```

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEmpty;
  verifiable.verifyThat(actual, IsEmpty());
  ```

  There exists more functionality when using the `IsEmpty` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsEmpty | matlab.unittest.diagnostics.Diagnostic | `isempty` | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyNotEmpty | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyEqual

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is equal to specified value

Syntax

```
verifyEqual(verifiable,actual,expected)
verifyEqual( ___ ,Name,Value)
verifyEqual( ___ ,diagnostic)
```

Description

`verifyEqual(verifiable,actual,expected)` verifies that `actual` is strictly equal to `expected`.

`verifyEqual( ___ ,Name,Value)` verifies equality with additional options specified by one or more `Name,Value` pair arguments.

`verifyEqual( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expected`

Expected value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'AbsTol'`

Absolute tolerance, specified as a numeric array. The tolerance is applied only to values of the same data type. The value can be a scalar or array the same size as the actual and expected values.

For an absolute tolerance to be satisfied, `abs(expected-actual) <= absTol` must be true.

Default:

`'RelTol'`

Relative tolerance, specified as a numeric array. The tolerance is applied only to values of the same data type. The value can be a scalar or array the same size as the actual and expected values.

For a relative tolerance to be satisfied, `abs(expected-actual) <= relTol.*abs(expected)` must be true.

Default:

Examples

Comparing Numeric Values

Numeric values are equivalent if they are of the same class with equivalent size, complexity, and sparsity.

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

A value is equal to itself.

```
verifyEqual(testCase,5,5);
```

```
Interactive verification passed.
```

Values must have equal sizes.

```
verifyEqual(testCase,[5 5],5);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyEqual failed.
--> Sizes do not match.

    Actual size:
              1     2
    Expected size:
              1     1

Actual double:
         5     5
Expected double:
         5
```

Test failed.

Test Classes

Verify if an `int8` is equal to an `int16`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyEqual(testCase,int8(5),int16(5));
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyEqual failed.
--> Classes do not match.

    Actual Class:
        int8
    Expected Class:
        int16

Actual int8:
       5
Expected int16:
       5
```

Test failed.

Test Cell Arrays

Each element of a cell array must be equal in value, class, and size.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyEqual(testCase,{'cell', struct, 5},{'cell', struct, 5});
```

```
Interactive verification passed.
```

Test Numeric Tolerances

Test if 4.95 is equal to 5.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyEqual(testCase,4.95,5);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyEqual failed.
--> The values are not equal using "isequaln".
--> Failure table:
        Actual    Expected           Error              RelativeError
        ______    ________    ___________________    ____________________

        4.95      5           -0.0499999999999998    -0.00999999999999996

Actual double:
       4.950000000000000
Expected double:
         5
```

Test failed.

```
verifyEqual(testCase,1.5,2,'AbsTol',1)
```

```
Interactive verification passed.
```

```
verifyEqual(testCase,1.5,2,'RelTol',0.1, ...
    'Difference between actual and expected exceeds relative tolerance')
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------
Difference between actual and expected exceeds relative tolerance

---------------------
Framework Diagnostic:
---------------------
verifyEqual failed.
--> The values are not equal using "isequaln".
--> The error was not within relative tolerance.
--> Failure table:
        Actual    Expected    Error    RelativeError    RelativeTolerance
        ______    ________    _____    _____________    _________________

        1.5       2           -0.5     -0.25            0.1
```

```
Actual double:
       1.500000000000000
Expected double:
         2
```

Test failed.

Tips

- This method is functionally equivalent to any of the following:

  ```
  import matlab.unittest.constraints.IsEqualTo;
  verifiable.verifyThat(actual, IsEqualTo(expected));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.AbsoluteTolerance;
  verifiable.verifyThat(actual, IsEqualTo(expected, ...
      'Within', AbsoluteTolerance(abstol)));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.RelativeTolerance;
  verifiable.verifyThat(actual, IsEqualTo(expected, ...
      'Within', RelativeTolerance(reltol)));
  ```

  ```
  import matlab.unittest.constraints.IsEqualTo;
  import matlab.unittest.constraints.AbsoluteTolerance;
  import matlab.unittest.constraints.RelativeTolerance;
  verifiable.verifyThat(actual, IsEqualTo(expected, ...
      'Within', AbsoluteTolerance(abstol) | RelativeTolerance(reltol)));
  ```

  There exists more functionality when using the `IsEqualTo`, `RelativeTolerance`, and `IsEqualTo` constraints directly via `verifyThat`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures

result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsEqualTo | matlab.unittest.constraints.AbsoluteTolerance | matlab.unittest.constraints.RelativeTolerance | matlab.unittest.diagnostics.Diagnostic | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyNotEqual | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyError

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify function throws specified exception

Syntax

```
verifyError(verifiable,actual,identifier)
verifyError(verifiable,actual,metaClass)
verifyError( ___ ,diagnostic)
```

Description

`verifyError(verifiable,actual,identifier)` verifies that `actual` is a function handle that throws an exception with an error identifier that is equal to `identifier`.

`verifyError(verifiable,actual,metaClass)` verifies that `actual` is a function handle that throws an exception whose type is defined by the `meta.class` instance specified in `metaClass`. This method does not require the instance to be an exact class match, but rather it must be in the specified class hierarchy, and that hierarchy must include the `MException` class.

`verifyError( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`identifier`

Error identifier, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test for Error IDs

```
testCase = matlab.unittest.TestCase.forInteractiveUse;

% Passing scenarios
%%%%%%%%%%%%%%%%%%%%%
verifyError(testCase, @() error('SOME:error:id','Error!'), 'SOME:error:id');
verifyError(testCase, @testCase.assertFail, ...
    ?matlab.unittest.qualifications.AssertionFailedException);

% Failing scenarios
%%%%%%%%%%%%%%%%%%%%%
verifyError(testCase, 5, 'some:id', '5 is not a function handle');
verifyError(testCase, @testCase.verifyFail, ...
```

```
    ?matlab.unittest.qualifications.AssertionFailedException, ...
    'Verifications dont throw exceptions.');
verifyError(testCase, @() error('SOME:id'), 'OTHER:id', 'Wrong id');
verifyError(testCase, @() error('whoops'), ...
    ?matlab.unittest.qualifications.AssertionFailedException, ...
    'Wrong type of exception thrown');
```

Test Error Condition

Create `testNonNumericInput` to test if function throws expected error message, `add5:InputMustBeNumeric`, for unexpected condition, input is `char`.

Function for unit testing:

```
function res = add5(x)
% ADD5 Increment input by 5.
if ~isa(x,'numeric')
    error('add5:InputMustBeNumeric','Input must be numeric.')
end
res = x + 5;
end
```

`TestCase` class containing test methods:

```
classdef Add5Test < matlab.unittest.TestCase
    methods (Test)
        function testDoubleOut(testCase)
            actOutput = add5(1);
            testCase.verifyClass(actOutput,'double')
        end
        function testNonNumericInput(testCase)
            testCase.verifyError(@()add5('0'),'add5:InputMustBeNumeric')
        end
    end
end
```

Create a test suite from the `Add5Test` class file.

```
suite = matlab.unittest.TestSuite.fromFile('Add5Test.m')
```

```
result = run(suite);
```

```
Running Add5Test
..
Done Add5Test
```

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.Throws;
  verifiable.verifyThat(actual, Throws(identifier));
  verifiable.verifyThat(actual, Throws(metaClass));
  ```

  There exists more functionality when using the `Throws` constraint directly via `verifyThat`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

MException | matlab.unittest.constraints.Throws | matlab.unittest.diagnostics.Diagnostic | `error` | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyThat | verifyWarning

Topics

"Types of Qualifications"

Introduced in R2013a

verifyFail

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Produce unconditional verification failure

Syntax

```
verifyFail(verifiable)
verifyFail(verifiable,diagnostic)
```

Description

`verifyFail(verifiable)` produces an unconditional verification failure when encountered.

`verifyFail(verifiable,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test for Failure Condition

An example of where this method may be used is in a callback function that should not be executed in a given scenario. A test can confirm this does not occur by unconditionally performing a failure if the code path is reached.

Create a handle class, `MyHandle`, with a `SomethingHappened` event.

```
classdef MyHandle < handle
    events
        SomethingHappened
    end
end
```

Create a file, `ListenerTest`, on your MATLAB path that contains the following `TestCase` class.

```
classdef ListenerTest < matlab.unittest.TestCase
    methods(Test)
        function testDisabledListeners(testCase)
            h = MyHandle;

            % Add a listener to a test helper method
            listener = h.addlistener('SomethingHappened', ...
                @testCase.shouldNotGetCalled);

            % Passing scenario (code path is not reached)
            %%%%%%%%%%%%%%%%%%%%%%
            % Disabled listener should not invoke callbacks
            listener.Enabled = false;
            h.notify('SomethingHappened');

            % Failing scenario (code path is reached)
            %%%%%%%%%%%%%%%%%%%%%%
            % Enabled listener invoke callback and fail
            listener.Enabled = true;
            h.notify('SomethingHappened');
        end
    end

    methods
        function shouldNotGetCalled(testCase, ~, ~)
```

```
            % A test helper callback method that should not execute
            testCase.verifyFail('This listener callback should not have executed');
        end
    end

end
```

From the command prompt, run the test.

```
run(ListenerTest);
```

```
Running ListenerTest

================================================================================
Verification failed in ListenerTest/testDisabledListeners.

    ----------------
    Test Diagnostic:
    ----------------
    This listener callback should not have executed

    ------------------
    Stack Information:
    ------------------
    In C:\Desktop\ListenerTest.m (ListenerTest.shouldNotGetCalled) at 27
    In C:\\Desktop\ListenerTest.m (@(varargin)testCase.shouldNotGetCalled(varargin{:}))
    In C:\Desktop\ListenerTest.m (ListenerTest.testDisabledListeners) at 20
================================================================================
.
Done ListenerTest
_________

Failure Summary:

     Name                                Failed  Incomplete  Reason(s)
    ===============================================================================
     ListenerTest/testDisabledListeners    X                 Failed by verification.
```

Tips

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the

primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | `matlab.unittest.constraints` | `matlab.unittest.qualifications`

Topics

"Types of Qualifications"

Introduced in R2013a

verifyFalse

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is false

Syntax

```
verifyFalse(verifiable,actual)
verifyFalse( ___ ,diagnostic)
```

Description

`verifyFalse(verifiable,actual)` verifies that `actual` is a scalar logical with the value of false.

`verifyFalse( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test MATLAB Logical Functions

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Test `true`.

```
verifyFalse(testCase, true);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyFalse failed.
--> The value must evaluate to "false".

Actual Value:
         1
```

Test failed.

Test `false`.

```
verifyFalse(testCase, false);
```

```
Interactive verification passed.
```

Test the Value 0

The number `0` is a `double` value, not a logical value.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyFalse(testCase, 0);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyFalse failed.
--> The value must be logical. It is of type "double".

Actual Value:
         0
```

Test failed.

Test Array of Logical Values

To be false, the value must be scalar.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyFalse(testCase, [false false false]);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyFalse failed.
--> The value must be scalar. It has a size of [1  3].

Actual Value:
         0     0     0
```

Test failed.

Test an array of mixed logical values.

```
verifyFalse(testCase, [false true false], ...
    'A mixed array of logicals is not the one false value');
```

```
Interactive verification failed.

----------------
Test Diagnostic:
```

```
----------------
A mixed array of logicals is not the one false value

---------------------
Framework Diagnostic:
---------------------
verifyFalse failed.
--> The value must be scalar. It has a size of [1  3].

Actual Value:
         0     1     0
```

Test failed.

Tips

- This method passes if and only if the actual value is a scalar logical with a value of false. Therefore, entities such as empty arrays, false valued arrays, and zero doubles produce failures when used in this method, despite these entities exhibiting "false-like" behavior such as bypassing the execution of code inside of "if" statements.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsFalse;
  verifiable.verifyThat(actual, IsFalse());
  ```

  There exists more functionality when using the `IsFalse` constraint directly via `verifyThat`.
- Unlike `verifyTrue`, this method may create a new constraint for each call. For performance critical uses, consider using `verifyTrue`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.IsFalse | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyThat | verifyTrue

Topics

"Types of Qualifications"

Introduced in R2013a

verifyGreaterThan

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is greater than specified value

Syntax

```
verifyGreaterThan(verifiable,actual,floor)
verifyGreaterThan( ___ ,diagnostic)
```

Description

`verifyGreaterThan(verifiable,actual,floor)` verifies that all elements of `actual` are greater than all the elements of `floor`.

`verifyGreaterThan( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `floor` unless either one is scalar, at which point scalar expansion occurs.

`floor`

Minimum value, exclusive.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Compare Two Numbers

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Verify 3 is greater than 2.

```
verifyGreaterThan(testCase, 3, 2);
```

```
Interactive verification passed.
```

Test if 5 is greater than 9.

```
verifyGreaterThan(testCase, 5, 9);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyGreaterThan failed.
--> The value must be greater than the minimum value.

Actual Value:
         5
Minimum Value (Exclusive):
```

```
         9
```

Test failed.

Compare an Array to a Scalar

Test if each element is greater than the `FLOOR` value, `2`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyGreaterThan(testCase, [5 6 7], 2);
```

```
Interactive verification passed.
```

Test if value `5` is greater than each element in the `FLOOR` array, `[1 2 3]`.

```
verifyGreaterThan(testCase, 5, [1 2 3]);
```

```
Interactive verification passed.
```

Test if each element in the matrix is greater than the `FLOOR` value, `4`.

```
verifyGreaterThan(testCase, [1 2 3; 4 5 6], 4);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyGreaterThan failed.
--> Each element must be greater than the minimum value.

    Failing Indices:
             1     2     3     5

Actual Value:
         1     2     3
         4     5     6
Minimum Value (Exclusive):
         4
```

Test failed.

Compare Arrays

Test if each element is greater than each corresponding element of the `FLOOR` array, `[4 -9 0]`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyGreaterThan(testCase, [5 -3 2], [4 -9 0]);
```

```
Interactive verification passed.
```

Compare an array to itself.

```
verifyGreaterThan(testCase, eye(2), eye(2));
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyGreaterThan failed.
--> Each element must be greater than each corresponding element of the minimum value a

    Failing Indices:
             1     2     3     4

Actual Value:
         1     0
         0     1
Minimum Value (Exclusive):
         1     0
         0     1
```

Test failed.

Tips

- This method is functionally equivalent to:

  ```
  matlab.unittest.constraints.IsGreaterThan;
  verifiable.verifyThat(actual, IsGreaterThan(floor));
  ```

  There exists more functionality when using the `IsGreaterThan` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit

from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

- Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsGreaterThan | matlab.unittest.diagnostics.Diagnostic | `gt` | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyGreaterThanOrEqual | verifyLessThan | verifyLessThanOrEqual | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyGreaterThanOrEqual

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is greater than or equal to specified value

Syntax

```
verifyGreaterThanOrEqual(verifiable,actual,floor)
verifyGreaterThanOrEqual( ___ ,diagnostic)
```

Description

`verifyGreaterThanOrEqual(verifiable,actual,floor)` that all elements of `actual` are greater than or equal to all the elements of `floor`.

`verifyGreaterThanOrEqual( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `floor` unless either one is scalar, at which point scalar expansion occurs.

`floor`

Minimum value.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Compare Two Numbers

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Verify 3 is greater than 2.

```
verifyGreaterThanOrEqual(testCase, 3, 2);
```

```
Interactive verification passed.
```

Verify 3 is greater than or equal to 3.

```
verifyGreaterThanOrEqual(testCase, 3, 3);
```

```
Interactive verification passed.
```

Test if 5 is greater than 9.

```
verifyGreaterThanOrEqual(testCase, 5, 9);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
```

```
verifyGreaterThanOrEqual failed.
--> The value must be greater than or equal to the minimum value.

Actual Value:
         5
Minimum Value (Inclusive):
         9
```

Test failed.

Compare an Array to a Scalar

Test if each element is greater than or equal to the `FLOOR` value, `2`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyGreaterThanOrEqual(testCase, [5 2 7], 2);
```

```
Interactive verification passed.
```

Test if each element in the matrix is greater than or equal to the `FLOOR` value, `4`.

```
verifyGreaterThanOrEqual(testCase, [1 2 3; 4 5 6], 4);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyGreaterThanOrEqual failed.
--> Each element must be greater than or equal to the minimum value.

    Failing Indices:
             1     3     5

Actual Value:
         1     2     3
         4     5     6
Minimum Value (Inclusive):
         4
```

Compare Arrays

Test if each element is greater than or equal to each corresponding element of the `FLOOR` array, `[4 -3 0]`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyGreaterThanOrEqual(testCase, [5 -3 2], [4 -3 0]);
```

```
Interactive verification passed.
```

Compare an array to itself.

```
verifyGreaterThanOrEqual(testCase, eye(2), eye(2));
```

```
Interactive verification passed.
```

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsGreaterThanOrEqualTo;
  verifiable.verifyThat(actual, IsGreaterThanOrEqualTo(floor));
  ```

  There exists more functionality when using the `IsGreaterThanOrEqualTo` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is

preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsGreaterThanOrEqualTo | matlab.unittest.diagnostics.Diagnostic | `ge` | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyGreaterThan | verifyLessThan | verifyLessThanOrEqual | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyInstanceOf

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is object of specified type

Syntax

```
verifyInstanceOf(verifiable,actual,className)
verifyInstanceOf(verifiable,actual,metaClass)
verifyInstanceOf( ___ ,diagnostic)
```

Description

`verifyInstanceOf(verifiable,actual,className)` verifies that `actual` is a MATLAB value whose class is the class specified by `className`.

`verifyInstanceOf(verifiable,actual,metaClass)` verifies that `actual` is a MATLAB value whose class is the class specified by the `meta.class` instance `metaClass`.

`verifyInstanceOf( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`className`

Name of class, specified as a character vector.

Default:

`metaClass`

An instance of `meta.class`.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test a Class

These interactive tests verify the class of the number, 5.

Create a `TestCase` object and the value to test.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
actvalue = 5;
```

Verify `actvalue` is an instance of class `double`.

```
verifyInstanceOf(testCase, actvalue, 'double');
```

```
Interactive verification passed.
```

Verify if `actvalue` is an instance of `char`.

```
verifyInstanceOf(testCase, 5, 'char');
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyInstanceOf failed.
--> The value must be an instance of the expected type.

    Actual Class:
        double
    Expected Type:
        char

Actual Value:
         5
```

Test failed.

Test a Function Handle

These tests verify function handles, specified as a meta.class instance, `?function_handle`.

Create a function handle.

```
fh = @sin;
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyInstanceOf(testCase, fh, ?function_handle);
```

```
Interactive verification passed.
```

Test the function name.

```
fh = 'sin';
verifyInstanceOf(testCase, fh, ?function_handle);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
```

```
verifyInstanceOf failed.
--> The value must be an instance of the expected type.

    Actual Class:
        char
    Expected Type:
        function_handle

Actual Value:
    sin
```

Test failed.

Test a Derived Class

Verify that a derived class is not the same class as its base class.

Create a class, `BaseExample`.

```
classdef BaseExample
end
```

Create a derived class, `DerivedExample`.

```
classdef DerivedExample < BaseExample
end
```

Verify `DerivedExample` is an instance of `BaseExample`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
testCase.verifyInstanceOf(DerivedExample(), ?BaseExample);
```

```
Interactive verification passed.
```

Verify `BaseExample` is not an instance of `DerivedExample`.

```
testCase.verifyInstanceOf(BaseExample(), ?DerivedExample);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyInstanceOf failed.
--> The value must be an instance of the expected type.
```

```
    Actual Class:
        BaseExample
    Expected Type:
        DerivedExample

Actual Value:
      BaseExample with no properties.
```

Test failed.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsInstanceOf;
  verifiable.verifyThat(actual, IsInstanceOf(className));
  verifiable.verifyThat(actual, IsInstanceOf(metaClass));
  ```

  There exists more functionality when using the `IsInstanceOf` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when

fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.IsInstanceOf | `isa` | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyClass | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyLength

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value has specified length

Syntax

```
verifyLength(verifiable,actual,expectedLength)
verifyLength( ___ ,diagnostic)
```

Description

`verifyLength(verifiable,actual,expectedLength)` verifies that `actual` is a MATLAB array whose length is `expectedLength`.

`verifyLength( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedLength`

The length of an array is defined as the largest dimension of that array.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test Array Lengths

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Verify length of array is the expected value, 5.

```
verifyLength(testCase, ones(2, 5, 3), 5, 'User diagnostic');
```

```
Interactive verification passed.
```

Length of array is not the expected value, 3.

```
verifyLength(testCase, [2 3], 3);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyLength failed.
--> The array has an incorrect length.

    Actual Length:
             2
    Expected Length:
             3
```

```
Actual Array:
         2     3
```

Test failed.

The length of a 2x3 array is 3.

```
verifyLength(testCase, [1 2 3; 4 5 6], 3);
```

```
Interactive verification passed.
```

Verify the length of a 2x3 array is not the number of elements, 6.

```
verifyLength(testCase, [1 2 3; 4 5 6], 6);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyLength failed.
--> The array has an incorrect length.

    Actual Length:
             3
    Expected Length:
             6

Actual Array:
         1     2     3
         4     5     6
```

Test failed.

```
verifyLength(testCase, eye(2), 4);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyLength failed.
--> The array has an incorrect length.
```

```
    Actual Length:
             2
    Expected Length:
             4

Actual Array:
         1     0
         0     1
```

Test Cell Array Lengths

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyLength(testCase, {'someText', 'someotherText'}, 2);
```

```
Interactive verification passed.
```

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasLength;
  verifiable.verifyThat(actual, HasLength(expectedLength));
  ```

  There exists more functionality when using the `HasLength` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.HasLength | `length` | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyNumElements | verifySize | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyLessThan

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is less than specified value

Syntax

```
verifyLessThan(verifiable,actual,ceiling)
verifyLessThan( ___ ,diagnostic)
```

Description

`verifyLessThan(verifiable,actual,ceiling)` verifies that all elements of `actual` are less than all the elements of `ceiling`.

`verifyLessThan( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test. `actual` must be the same size as `ceiling` unless either one is scalar, at which point scalar expansion occurs.

Default:

`ceiling`

Maximum value, exclusive.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Compare Two Numbers

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Verify 2 is less than 3.

```
verifyLessThan(testCase, 2, 3);
```

```
Interactive verification passed.
```

Test if 9 is less than 5.

```
verifyLessThan(testCase, 9, 5);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyLessThan failed.
--> The value must be less than the maximum value.

Actual Value:
         9
```

```
Maximum Value (Exclusive):
         5
```

Test failed.

Compare an Array to a Scalar

Test if each element is less than the `CEILING` value, `9`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyLessThan(testCase, [5 6 7], 9);
```

```
Interactive verification passed.
```

Test if each element in the matrix is less than the `CEILING` value, `4`.

```
verifyLessThan(testCase, [1 2 3; 4 5 6], 4);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyLessThan failed.
--> Each element must be less than the maximum value.

    Failing Indices:
             2     4     6

Actual Value:
         1     2     3
         4     5     6
Maximum Value (Exclusive):
         4
```

Test failed.

Compare Arrays

Test if each element is less than each corresponding element of the `CEILING` array, `[7 -1 8]`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyLessThan(testCase, [5 -3 2], [7 -1 8]);
```

```
Interactive verification passed.
```

Compare an array to itself.

```
verifyLessThan(testCase, eye(2), eye(2));
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyLessThan failed.
--> Each element must be less than each corresponding element of the maximum value arra

    Failing Indices:
             1     2     3     4

Actual Value:
         1     0
         0     1
Maximum Value (Exclusive):
         1     0
         0     1
```

Test failed.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsLessThan;
  verifiable.verifyThat(actual, IsLessThan(ceiling));
  ```

  There exists more functionality when using the `IsLessThan` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures

result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsLessThan | matlab.unittest.diagnostics.Diagnostic | `lt` | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyGreaterThan | verifyGreaterThanOrEqual | verifyLessThanOrEqual | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyLessThanOrEqual

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is less than or equal to specified value

Syntax

```
verifyLessThanOrEqual(verifiable,actual,ceiling)
verifyLessThanOrEqual( ___ ,diagnostic)
```

Description

`verifyLessThanOrEqual(verifiable,actual,ceiling)` verifies that all elements of `actual` are less than or equal to all the elements of `ceiling`.

`verifyLessThanOrEqual( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`ceiling`

Maximum value.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Compare Two Numbers

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Verify `2` is less than `3`.

```
verifyLessThanOrEqual(testCase, 2, 3);
```

```
Interactive verification passed.
```

Verify `3` is less than or equal to `3`.

```
verifyLessThanOrEqual(testCase, 3, 3);
```

```
Interactive verification passed.
```

Test if `9` is less than `5`.

```
verifyLessThanOrEqual(testCase, 9, 5);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyLessThanOrEqual failed.
```

```
--> The value must be less than or equal to the maximum value.

Actual Value:
         9
Maximum Value (Inclusive):
         5
```

Test failed.

Compare an Array to a Scalar

Test if each element is less than or equal to the `ceiling` value, `7`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyLessThanOrEqual(testCase, [5 2 7], 7);
```

```
Interactive verification passed.
```

Test if each element in the matrix is less than or equal to the `ceiling` value, `4`.

```
verifyLessThanOrEqual(testCase, [1 2 3; 4 5 6], 4);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyLessThanOrEqual failed.
--> Each element must be less than or equal to the maximum value.

    Failing Indices:
             4     6

Actual Value:
         1     2     3
         4     5     6
Maximum Value (Inclusive):
         4
```

Test failed.

Compare Arrays

Test if each element is less than or equal to each corresponding element of the `ceiling` array, `[5 -3 8]`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyLessThanOrEqual(testCase, [5 -3 2], [5 -3 8]);
```

```
Interactive verification passed.
```

Compare an array to itself.

```
verifyLessThanOrEqual(testCase, eye(2), eye(2));
```

```
Interactive verification passed.
```

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsLessThanOrEqualTo;
  verifiable.verifyThat(actual, IsLessThanOrEqualTo(ceiling));
  ```

  There exists more functionality when using the `IsLessThanOrEqualTo` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is

preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.constraints.IsLessThanOrEqualTo | matlab.unittest.diagnostics.Diagnostic | `le` | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyGreaterThan | verifyGreaterThanOrEqual | verifyLessThan | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyMatches

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify string matches specified regular expression

Syntax

```
verifyMatches(verifiable,actual,expression)
verifyMatches( ___ ,diagnostic)
```

Description

`verifyMatches(verifiable,actual,expression)` that `actual` is a string scalar or character vector that matches the regular expression defined by `expression`.

`verifyMatches( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The string to test.

Default:

`expression`

The value to match, specified as a regular expression.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test for String Matches

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Verify that text matches a regular expression.

```
verifyMatches(testCase, 'Some Text', 'Some [Tt]ext', ...
    'My result should have matched the expression');
```

```
Interactive verification passed.
```

```
verifyMatches(testCase, 'Another message', '(Some |An)other');
```

```
Interactive verification passed.
```

```
verifyMatches(testCase, 'Another 3 messages', '^Another \d+ messages?$');
```

```
Interactive verification passed.
```

```
verifyMatches(testCase, '3 more messages', '\d+ messages?');
```

```
Interactive verification failed.

---------------------
```

```
Framework Diagnostic:
---------------------
verifyMatches failed.
--> The value does not match the regular expression.

Actual char:
    3 more messages
Regular Expression:
    \d+ messages?
```

Test failed.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.Matches;
  verifiable.verifyThat(actual, Matches(expression));
  ```

  There exists more functionality when using the `Matches` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when

fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.Matches | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | `regexp` | verifySubstring | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyNotEmpty

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is not empty

Syntax

```
verifyNotEmpty(verifiable,actual)
verifyNotEmpty( ___ ,diagnostic)
```

Description

`verifyNotEmpty(verifiable,actual)` verifies that `actual` is a non-empty MATLAB value.

`verifyNotEmpty( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test for Non-Empty Character Vectors

Create a `TestCase` object.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

```
verifyNotEmpty(testCase, '');
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyNotEmpty failed.
--> The value must not be empty.
--> The value has a size of [0  0].

Actual char:
      0×0 empty char array
```

Test failed.

Test for Non-Empty Arrays

An array with any zero dimension is empty.

Test array `[2 3]`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

```
verifyNotEmpty(testCase, [2 3]);
```

```
Interactive verification passed.
```

Test array with a zero dimension.

```
verifyNotEmpty(testCase, ones(2, 5, 0, 3));
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyNotEmpty failed.
--> The value must not be empty.
--> The value has a size of [2  5  0  3].

Actual Value:
       Empty array: 2-by-5-by-0-by-3
```

Test failed.

Test for Non-Empty Cell Arrays

A cell array of empty arrays is not empty.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyNotEmpty(testCase, {[], [], []}, '');
```

```
Interactive verification passed.
```

Test for Non-Empty Test Suite

Test an empty object, `emptyTestSuite`.

```
emptyTestSuite = matlab.unittest.TestSuite.empty;
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyNotEmpty(testCase, emptyTestSuite);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
```

```
verifyNotEmpty failed.
--> The value must not be empty.
--> The value has a size of [0  0].

Actual Value:
      0x0 TestCase array with no properties.
```

Test failed.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEmpty;
  verifiable.verifyThat(actual, ~IsEmpty());
  ```

  There exists more functionality when using the `IsEmpty` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.IsEmpty | `isempty` | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyEmpty | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyNotEqual

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is not equal to specified value

Syntax

```
verifyNotEqual(verifiable,actual,notExpected)
verifyNotEqual( ___ ,diagnostic)
```

Description

`verifyNotEqual(verifiable,actual,notExpected)` verifies that `actual` is not equal to `notExpected`.

`verifyNotEqual( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`notExpected`

Value to compare.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Compare Numeric Values

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Compare a value to itself.

```
verifyNotEqual(testCase, 5, 5);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyNotEqual failed.
--> NumericComparator passed.

Actual Value:
         5
Prohibited Value:
         5
```

Test failed.

Compare different number values.

```
verifyNotEqual(testCase, 4.95, 5, '4.95 should be different from 5');
```

```
Interactive verification passed.
```

Values `4.95` and `5` are not equal.

Compare values of different sizes.

```
verifyNotEqual(testCase, [5 5], 5, '[5 5] is not equal to 5');
```

```
Interactive verification passed.
```

Values are not equal.

Compare Classes

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyNotEqual(testCase, int8(5), int16(5), 'Classes dont match');
```

```
Interactive verification passed.
```

Compare Cell Arrays

Test a cell array by comparing each element.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyNotEqual(testCase, {'cell', struct, 5}, {'cell', struct, 5});
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyNotEqual failed.
--> CellComparator passed.

Actual Value:
        'cell'    [1x1 struct]    [5]
Prohibited Value:
        'cell'    [1x1 struct]    [5]
```

Test failed.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsEqualTo;
  verifiable.verifyThat(actual, ~IsEqualTo(notExpected));
  ```

There exists more functionality when using the `IsEqualTo` constraint directly via `verifyThat`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.IsEqualTo | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyEqual | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyNotSameHandle

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is not handle to specified instance

Syntax

```
verifyNotSameHandle(verifiable,actual,notExpectedHandle)
verifyNotSameHandle( ___ ,diagnostic)
```

Description

`verifyNotSameHandle(verifiable,actual,notExpectedHandle)` verifies that `actual` is a different size and/or does not contain the same instances as the `notExpectedHandle` handle array.

`verifyNotSameHandle( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`notExpectedHandle`

The handle array to compare.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test Handles from Same Class

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Create a handle class, `ExampleHandle`.

```
classdef ExampleHandle < handle
end
```

Create two handle variables.

```
h1 = ExampleHandle;
h2 = ExampleHandle;
```

Handles point to different objects.

```
verifyNotSameHandle(testCase, h1, h2);
```

```
Interactive verification passed.
```

Show matching handle combinations.

```
verifyNotSameHandle(testCase, [h1 h2 h1], [h1 h2 h1]);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyNotSameHandle failed.
--> The two handles must not refer to the same handle, or should have
different sizes.

Actual Value:
      1x3 ExampleHandle array with no properties.
Handle Object:
      1x3 ExampleHandle array with no properties.
```

Test failed.

The order of the handle arguments matters.

```
verifyNotSameHandle(testCase, [h1 h2], [h2 h1]);
```

```
Interactive verification passed.
```

Test a handle with itself.

```
verifyNotSameHandle(testCase, h1, h1);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyNotSameHandle failed.
--> The two handles must not refer to the same handle, or should have
different sizes.

Actual Value:
      ExampleHandle with no properties.
Handle Object:
      ExampleHandle with no properties.
```

Test failed.

Variables are not same size.

```
verifyNotSameHandle(testCase, h2, [h2 h2]);
```

```
Interactive verification passed.
```

Variables are the same size.

```
verifyNotSameHandle(testCase, [h1 h1], [h1 h1]);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyNotSameHandle failed.
--> The two handles must not refer to the same handle, or should have
different sizes.

Actual Value:
      1x2 ExampleHandle array with no properties.
Handle Object:
      1x2 ExampleHandle array with no properties.
```

Test failed.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsSameHandleAs;
  verifiable.verifyThat(actual, ~IsSameHandleAs(notExpectedHandle));
  ```

  There exists more functionality when using the `IsSameHandleAs` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.

- Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.IsSameHandleAs | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifySameHandle | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyNumElements

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value has specified element count

Syntax

```
verifyNumElements(verifiable,actual,expectedElementCount)
verifyNumElements( ___ ,diagnostic)
```

Description

`verifyNumElements(verifiable,actual,expectedElementCount)` verifies that `actual` is a MATLAB array with `expectedElementCount` number of elements.

`verifyNumElements( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedElementCount`

The expected number of elements in the array.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test Matrices

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

```
n = 7;
verifyNumElements(testCase, eye(n), n^2);
```

```
Interactive verification passed.
```

```
verifyNumElements(testCase, 3, 1);
```

```
Interactive verification passed.
```

```
verifyNumElements(testCase, [1 2 3; 4 5 6], 5);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyNumElements failed.
--> The value did not have the correct number of elements.

    Actual Number of Elements:
             6
    Expected Number of Elements:
             5
```

```
Actual Value:
         1     2     3
         4     5     6
```

Test failed.

Test Cell Array

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyNumElements(testCase, {'SomeString', 'SomeOtherString'}, 2);
```

```
Interactive verification passed.
```

Test Structure

```
s.Field1 = 1;
s.Field2 = 2;
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyNumElements(testCase, s, 2);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyNumElements failed.
--> The value did not have the correct number of elements.

    Actual Number of Elements:
             1
    Expected Number of Elements:
             2

Actual Value:
        Field1: 1
        Field2: 2
```

Test failed.

Tips

- This method is functionally equivalent to:

```
import matlab.unittest.constraints.HasElementCount;
verifiable.verifyThat(actual, HasElementCount(expectedElementCount));
```

There exists more functionality when using the `HasElementCount` constraint directly via `verifyThat`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.HasElementCount | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | `numel` | verifyLength | verifySize | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyReturnsTrue

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify function returns true when evaluated

Syntax

```
verifyReturnsTrue(verifiable,actual)
verifyReturnsTrue( ___ ,diagnostic)
```

Description

`verifyReturnsTrue(verifiable,actual)` verifies that `actual` is a function handle that returns a scalar logical whose value is true.

`verifyReturnsTrue( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test if Condition is True

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyReturnsTrue(testCase, @true);
```

```
Interactive verification passed.
```

Verify that it is true that two numbers are equal.

```
verifyReturnsTrue(testCase, @() isequal(1,1));
```

```
Interactive verification passed.
```

Verify that it is true that two letters are not the same.

```
verifyReturnsTrue(testCase, @() ~strcmp('a','b'));
```

```
Interactive verification passed.
```

Cause verification to fail by trying to verify that “false” evaluates to “true”.

```
verifyReturnsTrue(testCase, @false);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyReturnsTrue failed.
```

```
--> The function handle should have evaluated to "true".
--> Returned value:
             0

Actual Function Handle:
        @false
```

Test failed.

Cause verification to fail by having the test specified in the function handle return a vector of logical values not a scalar logical value.

```
verifyReturnsTrue(testCase, @() strcmp('a',{'a','a'}));
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyReturnsTrue failed.
--> The function handle should have returned a scalar. The return value had a size of
--> Returned value:
             1     1

Actual Function Handle:
        @()strcmp('a',{'a','a'})
```

Test failed.

Cause verification to fail by having the test specified in the function handle return a double not a logical.

```
verifyReturnsTrue(testCase, @() exist('exist'));
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyReturnsTrue failed.
--> The function handle should have returned a logical value. It was of type "double".
--> Returned value:
             5
```

```
Actual Function Handle:
        @()exist('exist')
```

Test failed.

Tips

- It is a shortcut for quick custom comparison functionality that can be defined quickly, and possibly inline. It can be preferable over simply evaluating the function directly and using `verifyTrue` because the function handle will be shown in the diagnostics, thus providing more insight into the failure condition which is lost when using `verifyTrue`.
- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.ReturnsTrue;
  verifiable.verifyThat(actual, ReturnsTrue());
  ```

  There exists more functionality when using the `ReturnsTrue` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is

preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.ReturnsTrue | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyThat | verifyTrue

Topics

"Types of Qualifications"

Introduced in R2013a

verifySameHandle

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify two values are handles to same instance

Syntax

```
verifySameHandle(verifiable,actual,expectedHandle)
verifySameHandle( ___ ,diagnostic)
```

Description

`verifySameHandle(verifiable,actual,expectedHandle)` verifies that `actual` is the same size and contains the same instances as the `expectedHandle` handle array.

`verifySameHandle( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedHandle`

The expected handle array.

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test Handles from Same Class

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Create a handle class, `ExampleHandle`.

```
classdef ExampleHandle < handle
end
```

Create two handle variables.

```
h1 = ExampleHandle;
h2 = ExampleHandle;
```

Show matching handle combinations.

```
verifySameHandle(testCase, h1, h1);
```

```
Interactive verification passed.
```

```
verifySameHandle(testCase, [h1 h1], [h1 h1]);
```

```
Interactive verification passed.
```

```
verifySameHandle(testCase, [h1 h2 h1], [h1 h2 h1]);
```

```
Interactive verification passed.
```

Handles must point to same object.

```
verifySameHandle(testCase, h1, h2);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifySameHandle failed.
--> Values do not refer to the same handle.

Actual Value:
      ExampleHandle with no properties.
Expected Handle Object:
      ExampleHandle with no properties.
```

Test failed.

Size of handle objects must match.

```
verifySameHandle(testCase, [h1 h1], h1);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifySameHandle failed.
--> Sizes do not match.
     Actual Value Size           : [1  2]
     Expected Handle Object Size : [1  1]

Actual Value:
      1x2 ExampleHandle array with no properties.
Expected Handle Object:
      ExampleHandle with no properties.
```

Test failed.

Order of arguments is important.

```
verifySameHandle(testCase, [h1 h2], [h2 h1]);
```

```
Interactive verification failed.
```

```
---------------------
Framework Diagnostic:
---------------------
verifySameHandle failed.
--> Some elements in the handle array refer to the wrong handle.

Actual Value:
      1x2 ExampleHandle array with no properties.
Expected Handle Object:
      1x2 ExampleHandle array with no properties.
```

Test failed.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsSameHandleAs;
  verifiable.verifyThat(actual, IsSameHandleAs(expectedHandle));
  ```

  There exists more functionality when using the `IsSameHandleAs` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there

is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

handle | matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.IsSameHandleAs | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyNotSameHandle | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifySize

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value has specified size

Syntax

```
verifySize(verifiable,actual,expectedSize)
verifySize( ___ ,diagnostic)
```

Description

`verifySize(verifiable,actual,expectedSize)` verifies that `actual` is a MATLAB array whose size is `expectedSize`.

`verifySize( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`expectedSize`

The expected sizes of each dimension the array.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test Arrays

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

```
verifySize(testCase, ones(2, 5, 3), [2 5 3]);
```

```
Interactive verification passed.
```

```
verifySize(testCase, [1 2 3; 4 5 6], [2 3]);
```

```
Interactive verification passed.
```

```
verifySize(testCase, [2 3], [3 2]);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifySize failed.
--> The value had an incorrect size.

    Actual Size:
             1     2
    Expected Size:
             3     2
```

```
Actual Value:
         2     3
```

Test failed.

Number of elements is not the same as size.

```
verifySize(testCase, [1 2 3; 4 5 6], [6 1]);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifySize failed.
--> The value had an incorrect size.

    Actual Size:
             2     3
    Expected Size:
             6     1

Actual Value:
         1     2     3
         4     5     6
```

Test failed.

```
verifySize(testCase, eye(2), [4 1]);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifySize failed.
--> The value had an incorrect size.

    Actual Size:
             2     2
    Expected Size:
             4     1

Actual Value:
```

```
     1     0
     0     1
```

Test failed.

Test Cell Array

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifySize(testCase, {'SomeText', 'SomeOtherText'}, [1 2]);
```

```
Interactive verification passed.
```

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.HasSize;
  verifiable.verifyThat(actual, HasSize(expectedSize));
  ```

  There exists more functionality when using the `HasSize` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when

fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.HasSize | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | `size` | verifyLength | verifyNumElements | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifySubstring

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify string contains specified string

Syntax

```
verifySubstring(verifiable,actual,substring)
verifySubstring( ___ ,diagnostic)
```

Description

`verifySubstring(verifiable,actual,substring)` verifies that `actual` is a string scalar or character vector that contains `substring`.

`verifySubstring( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The string to test.

Default:

`substring`

The value to match, specified as a string scalar or character vector.

Default:

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test for Substrings

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Test that a substring is contained in a string.

```
verifySubstring(testCase, 'SomeLongMessage', 'Long');
```

```
Interactive verification passed.
```

Show that case matters.

```
verifySubstring(testCase, 'SomeLongMessage', 'lonG');
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifySubstring failed.
--> The value does not contain the substring.

Actual char:
    SomeLongMessage
Expected Substring:
    lonG
```

Test failed.

Cause the verification to fail by testing a substring that isn't contained in the actual string.

```
verifySubstring(testCase, 'SomeLongMessage', 'OtherMessage');
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifySubstring failed.
--> The value does not contain the substring.

Actual char:
    SomeLongMessage
Expected Substring:
    OtherMessage
```

Test failed.

Show that the verification will fail if the substring is longer than the actual string.

```
verifySubstring(testCase, 'SomeLongMessage', 'SomeLongMessageThatIsLonger');
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifySubstring failed.
--> The value does not contain the substring.

Actual char:
    SomeLongMessage
Expected Substring:
    SomeLongMessageThatIsLonger
```

Test failed.

Tips

- This method is functionally equivalent to:

```
import matlab.unittest.constraints.ContainsSubstring;
verifiable.verifyThat(actual, ContainsSubstring(substring));
```

There exists more functionality when using the `ContainsSubstring` constraint directly via `verifyThat`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.ContainsSubstring | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | `strfind` | verifyMatches | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyThat

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value meets given constraint

Syntax

```
verifyThat(verifiable,actual,constraint)
verifyThat( ___ ,diagnostic)
```

Description

`verifyThat(verifiable,actual,constraint)` verifies that `actual` is a value that satisfies the `constraint` provided.

If the constraint is not satisfied, a verification failure is produced utilizing only the framework diagnostic generated by the `constraint`.

`verifyThat( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

When using this signature, both the diagnostic information contained within `diagnostic` is used in addition to the diagnostic information provided by the `constraint`.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`constraint`

Constraint that the actual value must satisfy to pass the verification, specified as a matlab.unittest.constraints instance.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test Conditions Using Constraints

```
testCase = matlab.unittest.TestCase.forInteractiveUse;

% Passing scenarios
%%%%%%%%%%%%%%%%%%%%%
import matlab.unittest.constraints.IsTrue
verifyThat(testCase, true, IsTrue)

import matlab.unittest.constraints.IsEqualTo
verifyThat(testCase, 5, IsEqualTo(5), '5 should be equal to 5')

import matlab.unittest.constraints.IsGreaterThan
import matlab.unittest.constraints.HasNaN
verifyThat(testCase, [5 NaN], IsGreaterThan(10) | HasNaN, ...
    'The value was not greater than 10 or NaN')
```

```
% Failing scenarios
%%%%%%%%%%%%%%%%%%%%%
import matlab.unittest.constraints.AnyCellOf
import matlab.unittest.constraints.ContainsSubstring
verifyThat(testCase, AnyCellOf({'cell','of','strings'}), ...
    ContainsSubstring('char'),'Test description')

import matlab.unittest.constraints.HasSize
verifyThat(testCase, zeros(10,4,2), HasSize([10,5,2]), ...
    @() disp('A function handle diagnostic.'))

import matlab.unittest.constraints.IsEmpty
verifyThat(testCase, 5, IsEmpty)
```

Tips

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.Constraint | `matlab.unittest.constraints` | `matlab.unittest.qualifications`

Topics

"Types of Qualifications"

Introduced in R2013a

verifyTrue

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify value is true

Syntax

```
verifyTrue(verifiable,actual)
verifyTrue( ___ ,diagnostic)
```

Description

`verifyTrue(verifiable,actual)` verifies that `actual` is a scalar logical with the value of true.

`verifyTrue( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The value to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Examples

Test MATLAB Logical Functions

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Test `true`.

```
verifyTrue(testCase, true);
```

```
Interactive verification passed.
```

Test `false`.

```
verifyTrue(testCase, false);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyTrue failed.
--> The value must evaluate to "true".

Actual Value:
         0
```

Test failed.

Test the Value 1

The number `1` is a `double` value, not a logical value.

A double value of 1 is not `true`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyTrue(testCase, 1);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyTrue failed.
--> The value must be logical. It is of type "double".

Actual Value:
         1
```

Test failed.

Test Array of Logical Values

To be true, the value must be scalar.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyTrue(testCase, [true true true]);
```

```
Interactive verification failed.

----------------------
Framework Diagnostic:
----------------------
verifyTrue failed.
--> The value must be scalar. It has a size of [1  3].

Actual Value:
         1     1     1
```

Test failed.

Tips

- This method passes if and only if the actual value is a scalar logical with a value of true. Therefore, entities such as true valued arrays and nonzero doubles produce

qualification failures when used in this method, despite these entities exhibiting "true-like" behavior such as triggering the execution of code inside of "if" statements.

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IsTrue;
  verifiable.verifyThat(actual, IsTrue());
  ```

  There exists more functionality when using the `IsTrue` constraint directly via `verifyThat`.

  Use of this method for performance benefits can come at the expense of less diagnostic information, and may not provide the same level of strictness adhered to by other constraints such as `IsEqualTo`. A similar approach that is generally less performant but can provide slightly better diagnostic information is the use of `verifyReturnsTrue`, which at least shows the display of the function evaluated to generate the failing result.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.IsTrue | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyFalse | verifyReturnsTrue | verifyThat

Topics

"Types of Qualifications"

Introduced in R2013a

verifyWarning

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify function issues specified warning

Syntax

```
verifyWarning(verifiable,actual,warningID)
verifyWarning( ___ ,diagnostic)
[output1,...,outputN] = verifyWarning( ___ )
```

Description

`verifyWarning(verifiable,actual,warningID)` verifies that `actual` issues a warning with the identifier `warningID`.

`verifyWarning( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

`[output1,...,outputN] = verifyWarning( ___ )` also returns the output arguments `output1,...,outputN` that are produced when invoking `actual`.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

warningID

Warning ID, specified as a character vector.

diagnostic

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Output Arguments

output1,...,outputN

Output arguments, 1 through n (if any), from `actual`, returned as any type. The argument type is specified by the `actual` argument list.

Examples

Test warning Function

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Verify actual warning ID is the same as input warning ID.

```
verifyWarning(testCase, @() warning('SOME:warning:id','Warning!'), ...
    'SOME:warning:id');
```

```
Interactive verification passed.
```

```
verifyWarning(testCase, @() warning('SOME:other:id', 'Warning message'),...
```

```
    'SOME:warning:id', 'Did not issue specified warning');
```

```
Warning: Warning message
> In @()warning('SOME:other:id','Warning message')
  In FunctionHandleConstraint>FunctionHandleConstraint.invoke at 43
  In WarningQualificationConstraint>WarningQualificationConstraint.invoke at 58
  In IssuesWarnings>IssuesWarnings.invoke at 364
  In IssuesWarnings>IssuesWarnings.issuesExpectedWarnings at 411
  In IssuesWarnings>IssuesWarnings.satisfiedBy at 240
  In QualificationDelegate>QualificationDelegate.qualifyThat at 90
  In QualificationDelegate>QualificationDelegate.qualifyWarning at 196
  In Verifiable>Verifiable.verifyWarning at 701
Interactive verification failed.

----------------
Test Diagnostic:
----------------
Did not issue specified warning

---------------------
Framework Diagnostic:
---------------------
verifyWarning failed.
--> The function handle did not issue the expected warning.

    Actual Warnings:
        --> 'SOME:other:id'
    Expected Warning:
        --> 'SOME:warning:id'

Evaluated Function:
        @()warning('SOME:other:id','Warning message')
```

Test a Function Without Warnings

Test the `true` function, which does not issue warnings.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
verifyWarning(testCase, @true, 'SOME:warning:id', ...
'@true did not issue any warning');
```

```
Interactive verification failed.

----------------
Test Diagnostic:
```

```
----------------
@true did not issue any warning

---------------------
Framework Diagnostic:
---------------------
verifyWarning failed.
--> The function handle did not issue any warnings.

    Expected Warning:
        --> 'SOME:warning:id'

Evaluated Function:
        @true
```

Test failed.

Test Function With Output Arguments

Create a `helper` function that generates a warning and returns output.

```
function varargout = helper()
    warning('SOME:warning:id','Warning!');
    varargout = {123, 'abc'};
end
```

Call `helper`.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
[actualOut1, actualOut2] = verifyWarning(testCase, @helper, ...
    'SOME:warning:id');
```

```
Interactive verification passed.
```

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IssuesWarnings;
  verifiable.verifyThat(actual, IssuesWarnings({warningID}));
  ```

  There exists more functionality when using the `IssuesWarnings` constraint directly via `verifyThat`.

- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,
  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.
  - Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.IssuesWarnings | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyError | verifyThat | verifyWarningFree | `warning`

Topics

"Types of Qualifications"

Introduced in R2013a

verifyWarningFree

Class: matlab.unittest.qualifications.Verifiable
Package: matlab.unittest.qualifications

Verify function issues no warnings

Syntax

```
verifyWarningFree(verifiable,actual)
verifyWarningFree( ___ ,diagnostic)
output1,...,outputN = verifyWarningFree( ___ )
```

Description

`verifyWarningFree(verifiable,actual)` verifies that `actual` is a function handle that issues no warnings.

`verifyWarningFree( ___ ,diagnostic)` also displays the diagnostic information in `diagnostic` upon a failure.

`output1,...,outputN = verifyWarningFree( ___ )` also returns the output arguments `output1,...,outputN` that are produced when invoking `actual`.

Input Arguments

`verifiable`

The `matlab.unittest.TestCase` instance which is used to pass or fail the verification in conjunction with the test running framework.

`actual`

The function handle to test.

Default:

`diagnostic`

Diagnostic information related to the qualification, specified as one of the following:

- string array
- character array
- function handle
- `matlab.unittest.diagnostics.Diagnostic` object

Diagnostic values can be nonscalar. For more information, see matlab.unittest.diagnostics.Diagnostic.

Output Arguments

`output1,...,outputN`

Output arguments, 1 through n (if any), from `actual`, returned as any type. The argument type is specified by the `actual` argument list.

Examples

Test for Warnings from MATLAB Functions

Create a `TestCase` object for interactive testing.

```
testCase = matlab.unittest.TestCase.forInteractiveUse;
```

Test the `why` function.

```
verifyWarningFree(testCase, @why);
```

```
The bald and not excessively bald and not excessively smart hamster obeyed a terrified
Interactive verification passed.
```

This is a randomly-generated message.

Test the `true` function.

```
verifyWarningFree(testCase, @true);
```

```
Interactive verification passed.
```

Test the `false` function.

```
actualOutputFromFalse = verifyWarningFree(testCase, @false);
```

```
Interactive verification passed.
```

Test a value that is not a function handle.

```
verifyWarningFree(testCase, 5,'diagnostic');
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------
diagnostic

---------------------
Framework Diagnostic:
---------------------
verifyWarningFree failed.
--> The value must be an instance of the expected type.

    Actual Class:
        double
    Expected Type:
        function_handle

Actual Value:
         5
```

Test failed.

Test a function that generates warning.

```
verifyWarningFree(testCase, @() warning('some:id', 'Message'));
```

```
Warning: Message
> In @()warning('some:id','Message')
  In FunctionHandleConstraint>FunctionHandleConstraint.invoke at 43
  In WarningQualificationConstraint>WarningQualificationConstraint.invoke at 58
  In IssuesNoWarnings>IssuesNoWarnings.issuesNoWarnings at 131
  In IssuesNoWarnings>IssuesNoWarnings.satisfiedBy at 82
```

```
  In QualificationDelegate>QualificationDelegate.qualifyThat at 90
  In QualificationDelegate>QualificationDelegate.qualifyWarningFree at 204
  In Verifiable>Verifiable.verifyWarningFree at 757
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyWarningFree failed.
--> The function issued warnings.

    Warnings Issued:
         some:id

Evaluated Function:
        @()warning('some:id','Message')
```

Test failed.

Tips

- This method is functionally equivalent to:

  ```
  import matlab.unittest.constraints.IssuesNoWarnings;
  verifiable.verifyThat(actual, IssuesNoWarnings());
  ```

  There exists more functionality when using the `IssuesNoWarnings` constraint directly via `verifyThat`.
- Use verification qualifications to produce and record failures without throwing an exception. Since verifications do not throw exceptions, all test content runs to completion even when verification failures occur. Typically verifications are the primary qualification for a unit test since they typically do not require an early exit from the test. Use other qualification types to test for violation of preconditions or incorrect test setup. Alternatively,

  - Use assumption qualifications to ensure that the test environment meets preconditions that otherwise do not result in a test failure. Assumption failures result in filtered tests, and the testing framework marks the tests as `Incomplete`. For more information, see matlab.unittest.qualifications.Assumable.
  - Use assertion qualifications when the failure condition invalidates the remainder of the current test content, but does not prevent proper execution

of subsequent test methods. A failure at the assertion point renders the current test method as failed and incomplete. For more information, see matlab.unittest.qualifications.Assertable.

- Use fatal assertion qualifications to abort the test session upon failure. These qualifications are useful when the failure mode is so fundamental that there is no point in continuing testing. These qualifications are also useful when fixture teardown does not restore the MATLAB state correctly and it is preferable to abort testing and start a fresh session. For more information, see matlab.unittest.qualifications.FatalAssertable.

See Also

See Also

matlab.unittest.diagnostics.Diagnostic | matlab.unittest.constraints.IssuesNoWarnings | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | verifyThat | verifyWarning | `warning`

Topics

"Types of Qualifications"

Introduced in R2013a

quarter

Quarter number

Syntax

```
q = quarter(t)
```

Description

`q = quarter(t)` returns the quarter numbers for the datetime values in `t`. The `q` output is a `double` array containing integer values from 1 to 4, and is the same size as `t`.

Examples

Find Quarter Number of Dates

```
t = datetime(2013,05,31):calmonths(3):datetime(2014,05,31)
```

```
t = 1×5 datetime array
   31-May-2013   31-Aug-2013   30-Nov-2013   28-Feb-2014   31-May-2014
```

```
q = quarter(t)
```

```
q =

     2     3     4     1     2
```

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`day` | `month` | `week` | `year`

Introduced in R2014b

questdlg

Create question dialog box

Syntax

```
button = questdlg('qstring')
button = questdlg(qstring,title)
button = questdlg(qstring,title,default)
button = questdlg(qstring,title,str1,str2,default)
button = questdlg(qstring,title,str1,str2,str3,default)
button = questdlg(qstring,title, ..., options)
```

Description

`button = questdlg('qstring')` displays a modal dialog box presenting the question `'qstring'`. The dialog has three default buttons, **Yes**, **No**, and **Cancel**. If the user presses one of these three buttons, `button` is set to the name of the button pressed. If the user presses the close button on the dialog without making a choice, `button` returns as an empty character vector (`''`). If the user presses the **Return** key, `button` returns with a value of `'Yes'`. The `'qstring'` argument is a character vector or cell array of character vectors that automatically wrap to fit within the dialog box.

Note A modal dialog box prevents the user from interacting with other windows before responding. For more information, see `WindowStyle` in the MATLAB Figure Properties.

`button = questdlg(qstring,title)` displays a question dialog with `title` displayed in the dialog's title bar.

`button = questdlg(qstring,title,default)` specifies which push button is the default in the event that the **Return** key is pressed. `default` must be `'Yes'`, `'No'`, or `'Cancel'`.

`button = questdlg(qstring,title,str1,str2,default)` creates a question dialog box with two push buttons labeled `str1` and `str2`. *`default`* specifies the default button selection and must be `str1` or `str2`.

`button = questdlg(qstring,title,str1,str2,str3,default)` creates a question dialog box with three push buttons labeled `str1`, `str2`, and `str3`. `default` specifies the default button selection and must be `str1`, `str2`, or `str3`.

When `default` is specified, but is not set to one of the button names, pressing the **Enter** key displays a warning and the dialog remains open.

`button = questdlg(qstring,title, ..., options)` replaces the `default` argument with a structure called `options`. The structure specifies which button is the default answer, and whether to use TeX to interpret the question text. Button labels and dialog titles cannot use the TeX interpreter. The `options` structure must include the fields `Default` and `Interpreter`. The structure can include other fields, but `questdlg` does not use them. You can set `Interpreter` to `'none'` or `'tex'`. If the `Default` field does not contain a valid button label, a command window warning is issued and the dialog box does not respond to pressing the **Enter** key.

Examples

Example 1

Create a dialog that requests a dessert preference and encode the resulting choice as an integer.

```
% Construct a questdlg with three options
choice = questdlg('Would you like a dessert?', ...
 'Dessert Menu', ...
 'Ice cream','Cake','No thank you','No thank you');
% Handle response
switch choice
    case 'Ice cream'
        disp([choice ' coming right up.'])
        dessert = 1;
    case 'Cake'
        disp([choice ' coming right up.'])
        dessert = 2;
    case 'No thank you'
        disp('I''ll bring you your check.')
        dessert = 0;
end
```

To access the return value assigned to `dessert`, save the example as a function, for example `choosedessert`, by inserting this line on top:

```
function dessert = choosedessert
```

You can generalize the function by defining a `switch` statement. As the example shows, `case` statements can contain white space (but are case-sensitive).

Example 2

Specify an options structure to use the TeX interpreter to format a question.

```
options.Interpreter = 'tex';
% Include the desired Default answer
options.Default = 'Don''t know';
% Use the TeX interpreter in the question
qstring = 'Is \Sigma(\alpha - \beta) < 0?';
choice = questdlg(qstring,'Boundary Condition',...
    'Yes','No','Don''t know',options)
```

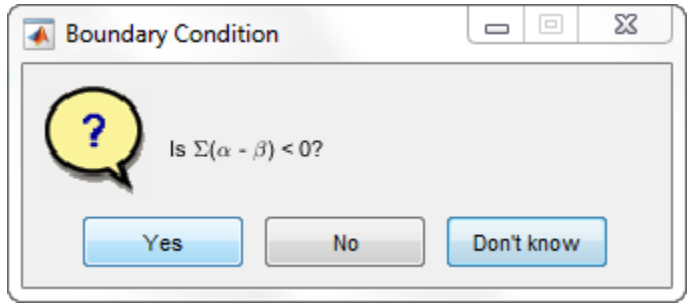

See Also

`dialog` | `errordlg` | `helpdlg` | `inputdlg` | `listdlg` | `msgbox` | `warndlg` | `figure` | `textwrap` | `uiwait` | `uiresume`

Introduced before R2006a

quit

Terminate MATLAB program

Syntax

```
quit
quit cancel
quit force
```

Description

`quit` displays a confirmation dialog box if the confirm that upon quitting preference is selected, and if confirmed or if the confirmation preference is not selected, terminates MATLAB after running `finish.m`, if `finish.m` exists. Call `quit` from the MATLAB command prompt. To interrupt a MATLAB command, see "Stop Execution".

The `quit` function does not automatically save the workspace. To save the workspace or perform other actions when quitting, create a `finish.m` file to perform those actions. For example, you can display a custom dialog box to confirm quitting using a `finish.m` file—see the following examples for details. If an error occurs while `finish.m` is running, `quit` is canceled so that you can correct your `finish.m` file without losing your workspace.

`quit` **`cancel`** is for use in `finish.m` and cancels quitting. It has no effect anywhere else.

`quit` **`force`** bypasses `finish.m` and terminates MATLAB. Use this syntax to override `finish.m`, for example, if an errant `finish.m` does not let you quit.

Examples

MATLAB includes two sample `finish.m` files. Use them to help you create your own `finish.m`, or rename one of the files to `finish.m` to use it.

- `finishsav.m`—Saves the workspace to a MAT-file when MATLAB quits.

- `finishdlg.m`—Displays a dialog box allowing you to cancel quitting; it uses `quit cancel` and contains the following code:

```
button = questdlg('Ready to quit?','Exit Dialog','Yes','No','No');
switch button
    case 'Yes',
        disp('Exiting MATLAB')
        % Save variables to matlab.mat
        save
    case 'No',
        quit cancel;
end
```

Tips

When using graphics objects in `finish.m`, use `uiwait`, `waitfor`, or `drawnow` so that figures are visible. See the reference pages for these functions for more information.

If you want MATLAB to display the following confirmation dialog box after running quit, select **Preferences** in the **Environment** section on the **Home** tab. Then select the check box for Confirm before exiting MATLAB, and click **OK**.

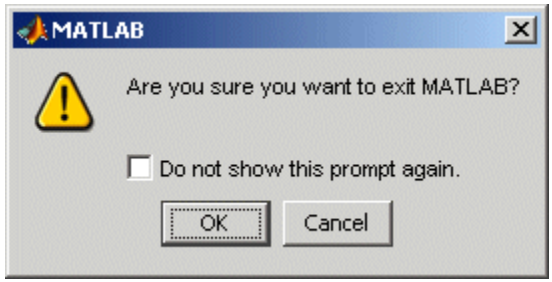

Alternatives

As an alternative to the quit function, use the Close box in the MATLAB desktop.

See Also

`exit` | `save` | `finish` | `startup`

Topics

"Stop Execution"

Introduced before R2006a

Quit (COM)

Terminate MATLAB Automation server

Syntax

IDL Method Signature

```
void Quit(void)
```

Microsoft Visual Basic Client

```
Quit
```

MATLAB Client

```
Quit(h)
```

Description

`Quit(h)` terminates the MATLAB server session attached to handle `h`. The MATLAB object is active until all references have been released, such as when the variable in a function call goes out of scope, or by calling the MATLAB `clear h` command.

The function name is case-sensitive.

To release the MATLAB object, type:

```
clear h
```

Introduced before R2006a

quiver

Quiver or velocity plot



Syntax

```
quiver(x,y,u,v)
quiver(u,v)
quiver(...,scale)
quiver(...,LineSpec)
quiver(...,LineSpec,'filled')
quiver(...,'PropertyName',PropertyValue,...)
quiver(ax,...)
h = quiver(...)
```

Description

A quiver plot displays velocity vectors as arrows with components `(u,v)` at the points `(x,y)`.

For example, the first vector is defined by components `u(1)`,`v(1)` and is displayed at the point `x(1)`,`y(1)`.

`quiver(x,y,u,v)` plots vectors as arrows at the coordinates specified in each corresponding pair of elements in `x` and `y`. The matrices `x`, `y`, `u`, and `v` must all be the same size and contain corresponding position and velocity components. However, `x` and `y` can also be vectors, as explained in the next section. By default, the arrows are scaled to just not overlap, but you can scale them to be longer or shorter if you want.

`quiver(u,v)` draws vectors specified by `u` and `v` at equally spaced points in the *x*-*y* plane.

`quiver(...,scale)` automatically scales the arrows to fit within the grid and then stretches them by the factor `scale`. `scale = 2` doubles their relative length, and `scale`

= 0.5 halves the length. Use scale = 0 to plot the velocity vectors without automatic scaling. You can also tune the length of arrows after they have been drawn by choosing the Plot Edit tool, selecting the quiver object, opening the Property Editor, and adjusting the **Length** slider.

quiver(...,LineSpec) specifies line style, marker symbol, and color using any valid LineSpec. quiver draws the markers at the origin of the vectors.

quiver(...,LineSpec,'filled') fills markers specified by LineSpec.

quiver(...,'*PropertyName*',PropertyValue,...) specifies property name and property value pairs for the quiver objects the function creates.

quiver(ax,...) plots into the axes ax instead of into the current axes (gca).

h = quiver(...) returns the Quiver object.

Expanding x- and y-Coordinates

MATLAB expands x and y if they are not matrices. This expansion is equivalent to calling meshgrid to generate matrices from vectors:

```
[x,y] = meshgrid(x,y);
quiver(x,y,u,v)
```

In this case, the following must be true:

length(x) = n and length(y) = m, where [m,n] = size(u) = size(v).

The vector x corresponds to the columns of u and v, and vector y corresponds to the rows of u and v.

Examples

Plot Vector Velocities

Use quiver to display an arrow at each data point in x and y such that the arrow direction and length represent the corresponding values in u and v.

```
[x,y] = meshgrid(0:0.2:2,0:0.2:2);
u = cos(x).*y;
v = sin(x).*y;
```

```
figure
quiver(x,y,u,v)
```

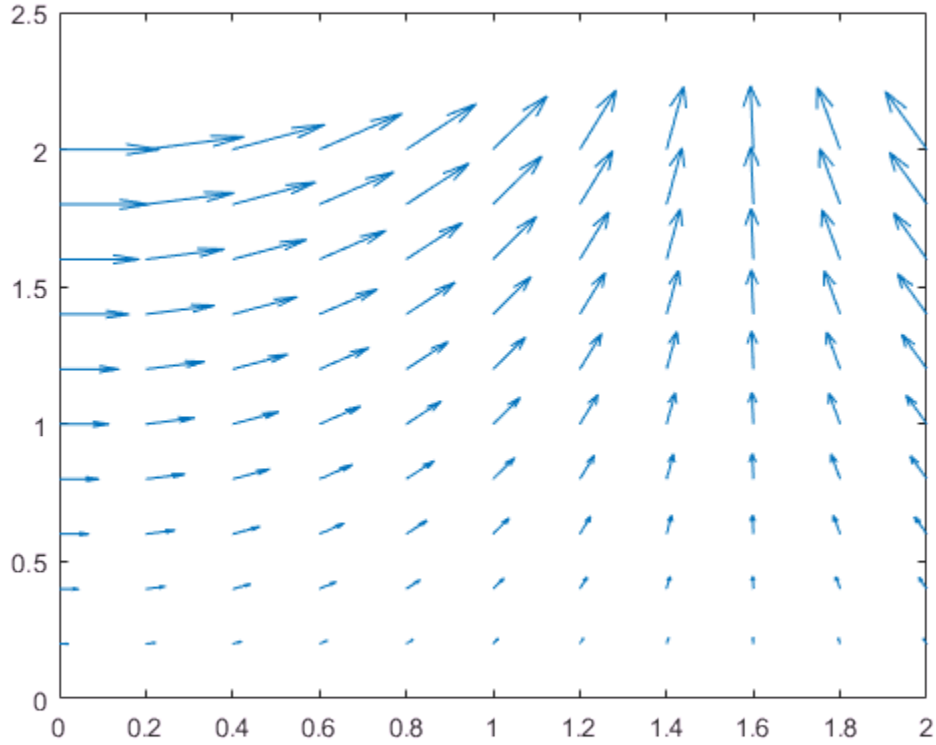

Show Gradient with Quiver Plot

Plot the gradient of the function $z = xe^{-x^2-y^2}$.

```
[X,Y] = meshgrid(-2:.2:2);
Z = X.*exp(-X.^2 - Y.^2);
[DX,DY] = gradient(Z,.2,.2);

figure
```

```
contour(X,Y,Z)
hold on
quiver(X,Y,DX,DY)
hold off
```

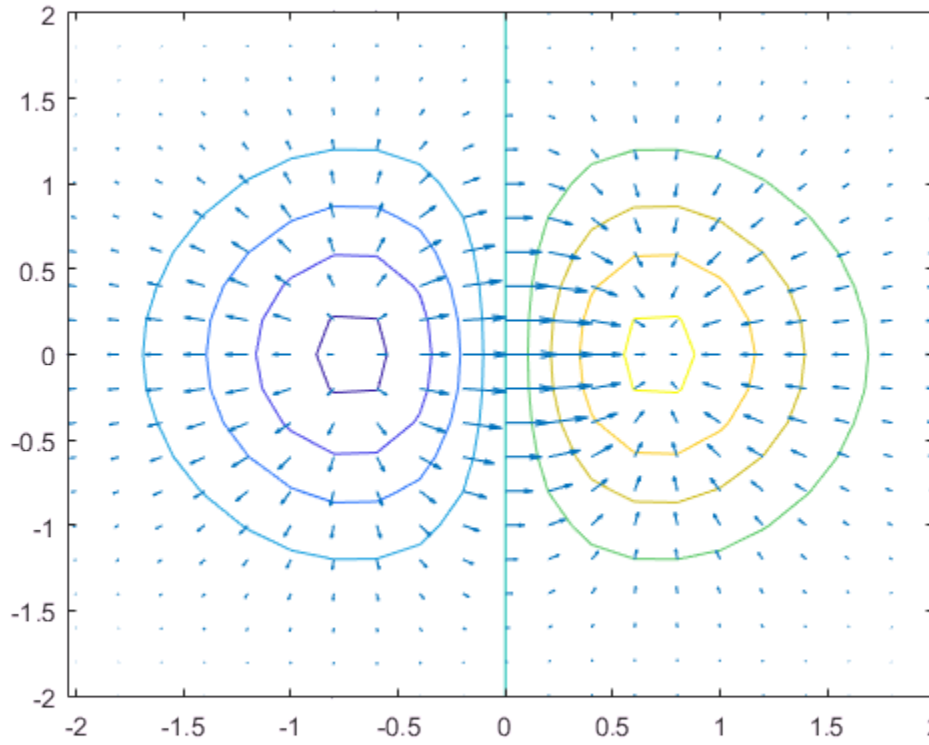

See Also

See Also

Functions

`contour` | `LineSpec` | `plot` | `quiver3`

Properties

Quiver Properties

Topics

"Combine Contour Plot and Quiver Plot"

Introduced before R2006a

quiver3

3-D quiver or velocity plot



Syntax

```
quiver3(x,y,z,u,v,w)
quiver3(z,u,v,w)
quiver3(...,scale)
quiver3(...,LineSpec)
quiver3(...,LineSpec,'filled')
quiver3(...,'PropertyName',PropertyValue,...)
quiver3(ax,...)
h = quiver3(...)
```

Description

A three-dimensional quiver plot displays vectors with components `(u,v,w)` at the points `(x,y,z)`, where `u`, `v`, `w`, `x`, `y`, and `z` all have real (non-complex) values.

`quiver3(x,y,z,u,v,w)` plots vectors with directions determined by components `(u,v,w)` at points determined by `(x,y,z)`. The matrices `x`,`y`,`z`,`u`,`v`, and `w` must all be the same size and contain the corresponding position and vector components.

`quiver3(z,u,v,w)` plots vectors with directions determined by components `(u,v,w)` at equally spaced points along the surface `z`. For each vector `(u(i,j),v(i,j),w(i,j))`, the column index `j` determines the *x*-value of the point on the surface, the row index `i` determines the *y*-value, and `z(i,j)` determines the *z*-value. That is, `quiver3` locates the vector at the point on the surface `(j,i,z(i,j))`. The `quiver3` function automatically scales the vectors to prevent overlapping based on the distance between them.

`quiver3(...,scale)` automatically scales the vectors to prevent them from overlapping, and then multiplies them by `scale`. `scale = 2` doubles their relative length, and `scale = 0.5` halves them. Use `scale = 0` to plot the vectors without the automatic scaling.

`quiver3(...,LineSpec)` specifies line style, marker symbol, and color using any valid `LineSpec`. `quiver3` draws the markers at the origin of the vectors.

`quiver3(...,LineSpec,'filled')` fills markers specified by `LineSpec`.

`quiver3(...,'PropertyName',PropertyValue,...)` specifies property name and property value pairs for the quiver chart that the function creates.

`quiver3(ax,...)` plots into the axes `ax` instead of into the current axes (`gca`).

`h = quiver3(...)` returns the `Quiver` object.

Examples

Create 3-D Quiver Plot

Define the data.

```
x = -3:0.5:3;
y = -3:0.5:3;
[X,Y] = meshgrid(x, y);
Z = Y.^2 - X.^2;
[U,V,W] = surfnorm(Z);
```

Plot vectors with components `(U,V,W)` at points that are equally spaced in the *x*-direction and *y*-direction with heights determined by `Z`.

```
figure
quiver3(Z,U,V,W)
view(-35,45)
```

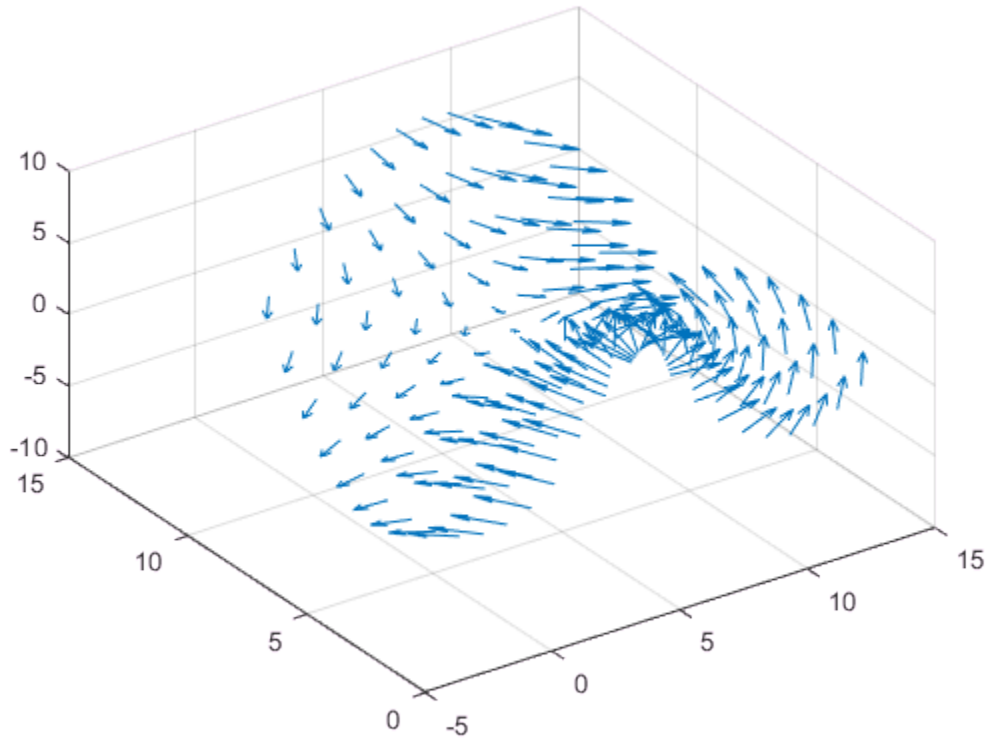

Plot Surface Normals

Plot the surface normals of the function $z = xe^{-x^2-y^2}$.

```
[X,Y] = meshgrid(-2:0.25:2,-1:0.2:1);
Z = X.* exp(-X.^2 - Y.^2);
[U,V,W] = surfnorm(X,Y,Z);

figure
quiver3(X,Y,Z,U,V,W,0.5)

hold on
```

```
surf(X,Y,Z)
view(-35,45)
axis([-2 2 -1 1 -.6 .6])
hold off
```

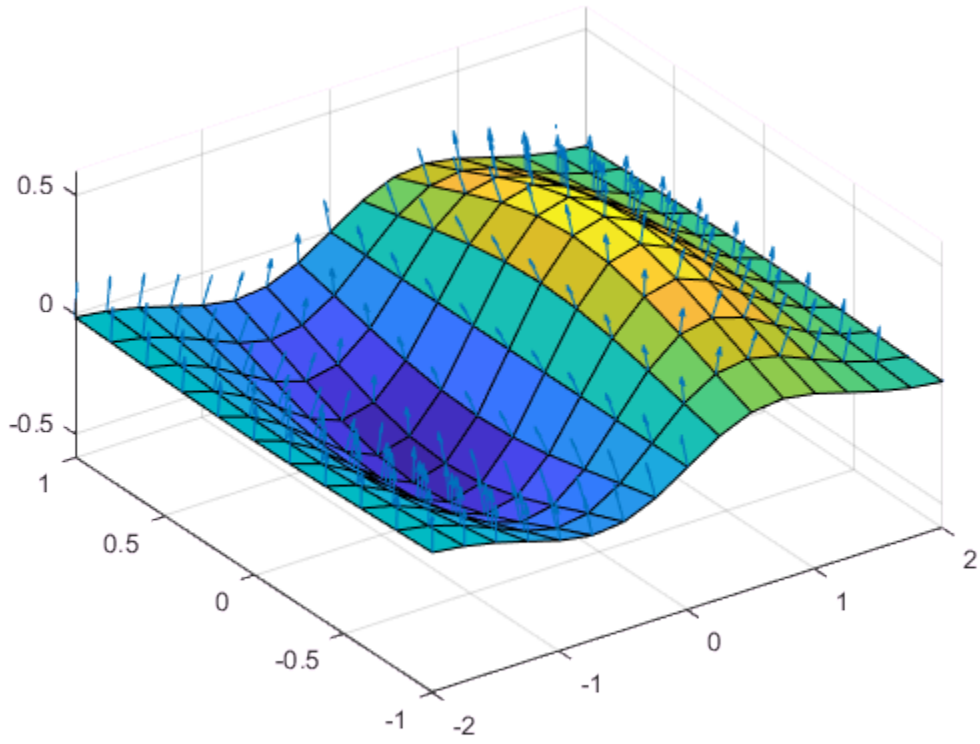

See Also

See Also

Functions

axis | contour | LineSpec | plot | plot3 | quiver | surfnorm | view

Properties

Quiver Properties

Topics

"Projectile Path Over Time"

Introduced before R2006a

Quiver Properties

Control quiver chart appearance and behavior

Description

`Quiver` properties control the appearance and behavior of a `Quiver` object. By changing property values, you can modify certain aspects of the quiver chart.

Starting in R2014b, you can use dot notation to query and set properties.

```
q = quiver(1:10,1:10);
c = q.Color;
q.Color = 'red';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Arrows

`Color` — Arrow color

`[0 0 1]` (default) | RGB triplet | character vector of color name | `'none'`

Arrow color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the arrow is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`

Long Name	Short Name	RGB Triplet
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`LineStyle` — Style of arrow stem

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Style of arrow stem, specified as one of the line styles listed in this table.

Line Style	Description	Result
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No stem	No stem

`LineWidth` — Width of arrow stem

`0.5` (default) | scalar numeric value

Width of arrow stem, specified as a scalar numeric value greater than zero in point units. One point equals `1/72` inch. The default value is `0.5` point.

Example: `0.75`

`ShowArrowHead` — Arrowhead display

`'on'` (default) | `'off'`

Arrowhead display, specified as one of these values:

- `'on'` — Display the vectors with arrowheads.
- `'off'` — Display the vectors without arrowheads.

`MaxHeadSize` — Maximum size of arrowhead

`0.2` (default) | scalar

Maximum size of arrowhead, specified as a scalar value in units relative to the length of the arrow.

Example: `0.1`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`AutoScale` — Automatic scaling of arrow length

`'on'` (default) | `'off'`

Automatic scaling of arrow length, specified as one of these values:

- `'on'` — Scale the arrow length to fit within the grid-defined coordinate data and scale arrows so that they do not overlap. The `quiver` function then applies the `AutoScaleFactor` to the arrow length.
- `'off'` — Do not scale the arrow lengths.

`AutoScaleFactor` — Scale factor

`0.9` (default) | scalar

Scale factor, specified as a scalar. A value of `2` doubles the length of the arrows. A value of `0.5` halves the arrow lengths.

This property has an effect only if the `AutoScale` property is set to `'on'`.

Example: `2`

`AlignVertexCenters` — Sharp vertical and horizontal lines

`'off'` (default) | `'on'`

Sharp vertical and horizontal lines, specified as `'off'` or `'on'`.

If the associated figure has a GraphicsSmoothing property set to `'on'` and a Renderer property set to `'opengl'`, then the figure applies a smoothing technique to plots. In

some cases, this smoothing technique can cause vertical and horizontal lines to appear uneven in thickness or color. Use the `AlignVertexCenters` property to eliminate the uneven appearance.

- `'off'` — Do not sharpen vertical or horizontal lines. The lines might appear uneven in thickness or color.
- `'on'` — Sharpen vertical and horizontal lines to eliminate an uneven appearance.

Note: You must have a graphics card that supports this feature. To see if the feature is supported, type `opengl info`. If it is supported, then the returned fields contain the line `SupportsAlignVertexCenters: 1`.

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'*'` | `...`

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle

Value	Description
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerSize` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`MarkerFaceColor` — Marker fill color

`'none'` (default) | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which makes the interior invisible.
- `'auto'` — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Data

`UData` — Vector lengths in x-direction

vector | matrix

Vector lengths in *x*-direction, specified as a vector or a matrix. The `UData`, `VData`, and `WData` properties together specify the components of the vectors displayed as arrows in the quiver chart.

Example: `1:10`

`VData` — Vector lengths in y-direction

vector | matrix

Vector lengths in *y*-direction, specified as a vector or a matrix. The `UData`, `VData`, and `WData` properties together specify the components of the vectors displayed as arrows in the quiver chart.

Example: `1:10`

`WData` — Vector lengths in z-direction

vector | matrix

Vector lengths in *z*-direction, specified as a vector or a matrix. The `UData`, `VData`, and `WData` properties together specify the components of the vectors displayed as arrows in the quiver chart. For 2-D quiver charts, `WData` is an empty array.

Example: `1:10`

`XData` — x-coordinates

vector | matrix

x-coordinates, specified as a vector or matrix. The input argument `X` to the `quiver` function determines the *x*-coordinates. If you do not specify `X`, then `quiver` uses the indices of `UData` as the *x*-coordinates. `XData` must be equal in size to `YData`.

Setting this property sets the associated mode property to manual mode.

Example: `1:10`

`YData` — y-coordinates

vector | matrix

y-coordinates, specified as a vector or matrix. The input argument `Y` to the `quiver` function determines the *y*-coordinates. If you do not specify `Y`, then `quiver` uses the indices of `VData` as the *y*-coordinates. `YData` must be equal in size to `XData`.

Setting this property sets the associated mode property to manual mode.

Example: `1:10`

`ZData` — z-coordinates

vector | matrix

z-coordinates, specified as a vector or matrix. The input argument `Z` to the `quiver3` function determines the *z*-coordinates. For 2-D quiver charts, `ZData` is an empty array. For 3-D quiver charts, `ZData` must be equal in size to `XData` and `YData`.

Example: `1:10`

`UDataSource` — Variable linked to `UData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `UData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `UData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, MATLAB does not update the `UData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

`VDataSource` — Variable linked to `VData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `VData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `VData`.

By default, there is no linked variable so the value is an character vector, `''`. If you link a variable, MATLAB does not update the `VData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

`WDataSource` — Variable linked to `WData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `WData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `WData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, MATLAB does not update the `WData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

`XDataSource` — Variable linked to `XData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `XData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `XData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `XData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'x'`

`YDataSource` — Variable linked to `YData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `YData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `YData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `YData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'y'`

`ZDataSource` — Variable linked to `ZData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `ZData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `ZData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `ZData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'z'`

`XDataMode` — Selection mode for `XData`

`'auto'` | `'manual'`

Selection mode for `XData`, specified as one of these values:

- `'auto'` — Automatically select the values.
- `'manual'` — Use manually specified values. To specify the values, set the `XData` property or use the input argument `X` to the function.

`YDataMode` — Selection mode for `YData`

`'auto'` | `'manual'`

Selection mode for `YData`, specified as one of these values:

- `'auto'` — Automatically select the values.
- `'manual'` — Use manually specified values. To specify the values, set the `YData` property or use the input argument `Y` to the function.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'quiver'`

This property is read-only.

Type of graphics object, returned as `'quiver'`. Use this property to find all objects of a given type within a plotting hierarchy, such as searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with

a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
```

```
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Quiver` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `Quiver` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Quiver` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Quiver` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Quiver` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Quiver` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Quiver` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`HitTestArea` — (removed) Extents of clickable area

`'off'` (default) | `'on'`

Note: `HitTestArea` has been removed. Use `PickableParts` instead.

Extents of clickable area, specified as one of these values:

- `'off'` — Click the object to select it. This is the default value.
- `'on'` — Click anywhere within the extent of the object to select it, that is, anywhere within the rectangle that encloses the object.

Example: `'off'`

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Quiver` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Quiver` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

DeleteFcn — Deletion callback

'' (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

BeingDeleted — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`quiver` | `quiver3`

Topics

"Access Property Values"
"Graphics Object Properties"

qz

QZ factorization for generalized eigenvalues

Syntax

```
[AA,BB,Q,Z] = qz(A,B)
[AA,BB,Q,Z,V,W] = qz(A,B)
qz(A,B,flag)
```

Description

The `qz` function gives access to intermediate results in the computation of generalized eigenvalues.

`[AA,BB,Q,Z] = qz(A,B)` for square matrices `A` and `B`, produces upper quasitriangular matrices `AA` and `BB`, and unitary matrices `Q` and `Z` such that `Q*A*Z = AA`, and `Q*B*Z = BB`. For complex matrices, `AA` and `BB` are triangular.

`[AA,BB,Q,Z,V,W] = qz(A,B)` also produces matrices `V` and `W` whose columns are generalized eigenvectors.

`qz(A,B,flag)` for real matrices `A` and `B`, produces one of two decompositions depending on the value of `flag`:

`'complex'`	Produces a possibly complex decomposition with a triangular `AA`. For compatibility with earlier versions, `'complex'` is the default.
`'real'`	Produces a real decomposition with a quasitriangular `AA`, containing 1-by-1 and 2-by-2 blocks on its diagonal.

If `AA` is triangular, then the diagonal elements `a = diag(AA)` and `b = diag(BB)` are the generalized eigenvalues that satisfy

```
A*V*b = B*V*a
b'*W'*A = a'*W'*B
```

The eigenvalues produced by `lambda = eig(A,B)` are the ratios of the diagonal elements `a` and `b`, such that `lambda = a./b`.

If `AA` is not triangular, it is necessary to further reduce the 2-by-2 blocks to obtain the eigenvalues of the full system.

See Also

`eig`

Introduced before R2006a

rad2deg

Convert angle from radians to degrees

Syntax

```
D = rad2deg(R)
```

Description

`D = rad2deg(R)` converts angle units from radians to degrees for each element of `R`.

Examples

`pi` in Degrees

Convert `pi` into degrees.

```
D = rad2deg(pi)
```

```
D = 180
```

Spherical Distance

Specify the mean radius of Earth and the distance from Munich to Bangalore measured along the Earth's surface (in kilometers). Compute the spherical distance between Munich and Bangalore in degrees.

```
dist = 7194;
radEarth = 6371;
R = dist/radEarth;
D = rad2deg(R)
```

```
D = 64.6972
```

Input Arguments

R — Angle in radians

scalar | vector | matrix | multidimensional array

Angle in radians, specified as a scalar, vector, matrix, or multidimensional array. If R contains complex elements, rad2deg converts the real and imaginary parts separately.

Data Types: single | double
Complex Number Support: Yes

Output Arguments

D — Angle in degrees

scalar | vector | matrix | multidimensional array

Angles in degrees, returned as a scalar, vector, matrix, or multidimensional array. D is the same size as R.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`deg2rad`

Introduced in R2015b

rand

Uniformly distributed random numbers

Syntax

```
X = rand
X = rand(n)
X = rand(sz1,...,szN)
X = rand(sz)

X = rand(___,typename)
X = rand(___,'like',p)
```

Description

`X = rand` returns a single uniformly distributed random number in the interval (0,1).

`X = rand(n)` returns an `n`-by-`n` matrix of random numbers.

`X = rand(sz1,...,szN)` returns an `sz1`-by-...-by-`szN` array of random numbers where `sz1,...,szN` indicate the size of each dimension. For example, `rand(3,4)` returns a 3-by-4 matrix.

`X = rand(sz)` returns an array of random numbers where size vector `sz` specifies `size(X)`. For example, `rand([3 4])` returns a 3-by-4 matrix.

`X = rand(___,typename)` returns an array of random numbers of data type `typename`. The `typename` input can be either `'single'` or `'double'`. You can use any of the input arguments in the previous syntaxes.

`X = rand(___,'like',p)` returns an array of random numbers like `p`; that is, of the same object type as `p`. You can specify either `typename` or `'like'`, but not both.

Note: The `'seed'`, `'state'`, and `'twister'` inputs to the `rand` function are not recommended. Use the `rng` function instead. For more information, see "Replace Discouraged Syntaxes of rand and randn".

Examples

Matrix of Random Numbers

Generate a 5-by-5 matrix of uniformly distributed random numbers between 0 and 1.

```
r = rand(5)
```

```
r =

    0.8147    0.0975    0.1576    0.1419    0.6557
    0.9058    0.2785    0.9706    0.4218    0.0357
    0.1270    0.5469    0.9572    0.9157    0.8491
    0.9134    0.9575    0.4854    0.7922    0.9340
    0.6324    0.9649    0.8003    0.9595    0.6787
```

Random Numbers Within Specified Interval

Generate a 10-by-1 column vector of uniformly distributed numbers in the interval (-5,5).

```
r = -5 + (5+5)*rand(10,1)
```

```
r =

    3.1472
    4.0579
   -3.7301
    4.1338
    1.3236
   -4.0246
   -2.2150
    0.4688
    4.5751
    4.6489
```

In general, you can generate `N` random numbers in the interval (a,b) with the formula `r = a + (b-a).*rand(N,1)`.

Random Integers

Use the `randi` function (instead of `rand`) to generate 5 random integers from the uniform distribution between 10 and 50.

```
r = randi([10 50],1,5)
```

```
r =

    43    47    15    47    35
```

Random Complex Numbers

Generate a single random complex number with real and imaginary parts in the interval (0,1).

```
a = rand + 1i*rand
```

```
a =
   0.8147 + 0.9058i
```

Reset Random Number Generator

Save the current state of the random number generator and create a 1-by-5 vector of random numbers.

```
s = rng;
r = rand(1,5)
```

```
r =

    0.8147    0.9058    0.1270    0.9134    0.6324
```

Restore the state of the random number generator to `s`, and then create a new 1-by-5 vector of random numbers. The values are the same as before.

```
rng(s);
r1 = rand(1,5)
```

```
r1 =

    0.8147    0.9058    0.1270    0.9134    0.6324
```

Always use the rng function (rather than the `rand` or `randn` functions) to specify the settings of the random number generator. For more information, see “Replace Discouraged Syntaxes of rand and randn”.

3-D Array of Random Numbers

Create a 3-by-2-by-3 array of random numbers.

```
X = rand([3,2,3])
```

```
X =

(:,:,1) =

    0.8147    0.9134
    0.9058    0.6324
    0.1270    0.0975


(:,:,2) =

    0.2785    0.9649
    0.5469    0.1576
    0.9575    0.9706


(:,:,3) =

    0.9572    0.1419
    0.4854    0.4218
    0.8003    0.9157
```

Specify Data Type of Random Numbers

Create a 1-by-4 vector of random numbers whose elements are single precision.

```
r = rand(1,4,'single')
```

```
r = 1×4 single row vector

    0.8147    0.9058    0.1270    0.9134
```

```
class(r)
```

```
ans =
'single'
```

Clone Size from Existing Array

Create a matrix of random numbers with the same size as an existing array.

```
A = [3 2; -2 1];
sz = size(A);
X = rand(sz)
```

```
X =

    0.8147    0.1270
    0.9058    0.9134
```

It is a common pattern to combine the previous two lines of code into a single line:

```
X = rand(size(A));
```

Clone Size and Data Type from Existing Array

Create a 2-by-2 matrix of single precision random numbers.

```
p = single([3 2; -2 1]);
```

Create an array of random numbers that is the same size and data type as `p`.

```
X = rand(size(p),'like',p)
```

```
X = 2×2 single matrix

    0.8147    0.1270
    0.9058    0.9134
```

```
class(X)
```

```
ans =
'single'
```

Clone Distributed Array

If you have Parallel Computing Toolbox™, create a 1000-by-1000 distributed array of random numbers with underlying data type `single`. For the `distributed` data type, the `'like'` syntax clones the underlying data type in addition to the primary data type.

```
p = rand(1000,'single','distributed');
```

Create an array of random numbers that is the same size, primary data type, and underlying data type as p.

```
X = rand(size(p),'like',p);
```

```
class(X)
```

```
ans =

distributed
```

```
classUnderlying(X)
```

```
ans =

single
```

- "Create Arrays of Random Numbers"
- "Random Numbers Within a Specific Range"
- "Random Numbers Within a Sphere"

Input Arguments

n — Size of square matrix

integer value

Size of square matrix, specified as an integer value.

- If n is 0, then X is an empty matrix.
- If n is negative, then it is treated as 0.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

sz1,...,szN — Size of each dimension (as separate arguments)

integer values

Size of each dimension, specified as separate arguments of integer values.

- If the size of any dimension is `0`, then `X` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- Beyond the second dimension, `rand` ignores trailing dimensions with a size of 1. For example, `rand(3,1,1,1)` produces a 3-by-1 vector of random numbers.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz` — Size of each dimension (as a row vector)

integer values

Size of each dimension, specified as a row vector of integer values. Each element of this vector indicates the size of the corresponding dimension:

- If the size of any dimension is `0`, then `X` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- Beyond the second dimension, `rand` ignores trailing dimensions with a size of 1. For example, `rand([3,1,1,1])` produces a 3-by-1 vector of random numbers.

Example: `sz = [2,3,4]` creates a 2-by-3-by-4 array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`typename` — Data type (class) to create

`'double'` (default) | `'single'`

Data type (class) to create, specified as `'double'`, `'single'`, or the name of another class that provides `rand` support.

Example: `rand(5,'single')`

`p` — Prototype of array to create

numeric array

Prototype of array to create, specified as a numeric array.

Example: `rand(5,'like',p)`

Data Types: `single` | `double`
Complex Number Support: Yes

Tips

- The sequence of numbers produced by `rand` is determined by the internal settings of the uniform pseudorandom number generator that underlies `rand`, `randi`, and `randn`. You can control that shared random number generator using `rng`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The data type (class) must be a built-in MATLAB numeric type. For other classes, the static `rand` method is not invoked. For example, `rand(sz,'myclass')` does not invoke `myclass.rand(sz)`.
- Size arguments must have a fixed size.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`randi` | `randn` | `randperm` | `RandStream` | `rng` | `sprand` | `sprandn`

Topics

"Create Arrays of Random Numbers"
"Random Numbers Within a Specific Range"
"Random Numbers Within a Sphere"
"Creating and Controlling a Random Number Stream"
"Class Support for Array-Creation Functions"
"Replace Discouraged Syntaxes of rand and randn"
"Why Do Random Numbers Repeat After Startup?"

Introduced before R2006a

rand (RandStream)

Uniformly distributed random numbers

Class

`RandStream`

Syntax

```
r = rand(s,n)
r = rand(s,m,n)
r = rand(s,[m,n])
r = rand(s,m,n,p,...)
r = rand(s,[m,n,p,...])
r = rand(s)
r = rand(s,size(A))
r = rand(..., 'double')
r = rand(..., 'single')
```

Description

`r = rand(s,n)` returns an `n`-by-`n` matrix containing pseudorandom values drawn from the standard uniform distribution on the open interval (0,1). The values are drawn from the random stream `s`.

`r = rand(s,m,n)` or `r = rand(s,[m,n])` returns an `m`-by-`n` matrix.

`r = rand(s,m,n,p,...)` or `r = rand(s,[m,n,p,...])` returns an `m`-by-`n`-by-`p`-by-... array.

`r = rand(s)` returns a scalar.

`r = rand(s,size(A))` returns an array the same size as `A`.

`r = rand(..., 'double')` or `r = rand(..., 'single')` returns an array of uniform values of the specified class.

Note: The size inputs `m`, `n`, `p`, ... should be nonnegative integers. Negative integers are treated as 0.

The sequence of numbers produced by `rand` is determined by the internal state of the random number stream `s`. Resetting that stream to the same fixed state allows computations to be repeated. Setting the stream to different states leads to unique computations, however, it does not improve any statistical properties.

See Also

`rand` | `randi (RandStream)` | `randn (RandStream)` | `@RandStream` | `randperm (RandStream)`

randi

Uniformly distributed pseudorandom integers

Syntax

```
X = randi(imax)
X = randi(imax,n)
X = randi(imax,sz1,...,szN)
X = randi(imax,sz)

X = randi(imax,classname)
X = randi(imax,n,classname)
X = randi(imax,sz1,...,szN,classname)
X = randi(imax,sz,classname)

X = randi(imax,'like',p)
X = randi(imax,n,'like',p)
X = randi(imax,sz1,...,szN,'like',p)
X = randi(imax,sz,'like',p)

X = randi([imin,imax], ___ )
```

Description

`X = randi(imax)` returns a pseudorandom scalar integer between `1` and `imax`.

`X = randi(imax,n)` returns an `n`-by-`n` matrix of pseudorandom integers drawn from the discrete uniform distribution on the interval [`1`,`imax`].

`X = randi(imax,sz1,...,szN)` returns an `sz1`-by-...-by-`szN` array where `sz1,...,szN` indicates the size of each dimension. For example, `randi(10,3,4)` returns a 3-by-4 array of pseudorandom integers between 1 and 10.

`X = randi(imax,sz)` returns an array where size vector `sz` defines `size(X)`. For example, `randi(10,[3,4])` returns a 3-by-4 array of pseudorandom integers between 1 and 10.

`X = randi(imax,classname)` returns a pseudorandom integer where `classname` specifies the data type. `classname` can be `'single'`, `'double'`, `'int8'`, `'uint8'`, `'int16'`, `'uint16'`, `'int32'`, or `'uint32'`.

`X = randi(imax,n,classname)` returns an `n`-by-`n` array of data type `classname`.

`X = randi(imax,sz1,...,szN,classname)` returns an `sz1`-by-...-by-`szN` array of data type `classname`.

`X = randi(imax,sz,classname)` returns an array where size vector `sz` defines `size(X)` and `classname` defines `class(X)`.

`X = randi(imax,'like',p)` returns a pseudorandom integer like `p`; that is, with the same data type (class).

`X = randi(imax,n,'like',p)` returns an `n`-by-`n` array like `p`.

`X = randi(imax,sz1,...,szN,'like',p)` returns an `sz1`-by-...-by-`szN` array like `p`.

`X = randi(imax,sz,'like',p)` returns an array like `p` where size vector `sz` defines `size(X)`.

`X = randi([imin,imax], ___ )` returns an array containing integers drawn from the discrete uniform distribution on the interval [`imin`,`imax`], using any of the above syntaxes.

Examples

Square Matrix of Random Integers

Generate a 5-by-5 matrix of random integers between 1 and 10. The first input to `randi` indicates the largest integer in the sampling interval (the smallest integer in the interval is 1).

```
r = randi(10,5)
```

```
r =

     9     1     2     2     7
    10     3    10     5     1
     2     6    10    10     9
```

```
    10    10     5     8    10
     7    10     9    10     7
```

Random Integers Within Specified Interval

Generate a 10-by-1 column vector of uniformly distributed random integers from the sample interval `[-5,5]`.

```
r = randi([-5,5],10,1)
```

```
r =

     3
     4
    -4
     5
     1
    -4
    -2
     1
     5
     5
```

Control Random Number Generation

Save the current state of the random number generator and create a 1-by-5 vector of random integers.

```
s = rng;
r = randi(10,1,5)
```

```
r =

     9    10     2    10     7
```

Restore the state of the random number generator to `s`, and then create a new 1-by-5 vector of random integers. The values are the same as before.

```
rng(s);
r1 = randi(10,1,5)
```

```
r1 =

     9    10     2    10     7
```

Always use the rng function (rather than the `rand` or `randn` functions) to specify the settings of the random number generator. For more information, see "Replace Discouraged Syntaxes of rand and randn".

3-D Array of Random Integers

Create a 3-by-2-by-3 array of uniformly distributed random integers between 1 and 500.

```
X = randi(500,[3,2,3])
```

```
X =

(:,:,1) =

   408   457
   453   317
    64    49


(:,:,2) =

   140   483
   274    79
   479   486


(:,:,3) =

   479    71
   243   211
   401   458
```

Random Integers of Other Data Types

Create a 1-by-4 vector of random numbers whose elements are of type `int16`.

```
r = randi(100,1,4,'int16')
```

```
r = 1×4 int16 row vector

   82   91   13   92
```

```
class(r)
```

```
ans =
'int16'
```

Size Defined by Existing Array

Create a matrix of uniformly distributed random integers between 1 and 10 with the same size as an existing array.

```
A = [3 2; -2 1];
sz = size(A);
X = randi(10,sz)
```

```
X =

     9     2
    10    10
```

It is a common pattern to combine the previous two lines of code into a single line:

```
X = randi(10,size(A));
```

Size and Numeric Data Type Defined by Existing Array

Create a 2-by-2 matrix of 8-bit signed integers.

```
p = int8([3 2; -2 1]);
```

Create an array of random integers that is the same size and data type as p.

```
X = randi(10,size(p),'like',p)
```

```
X = 2×2 int8 matrix

    9    2
   10   10
```

```
class(X)
```

```
ans =
'int8'
```

- "Random Integers"
- "Create Arrays of Random Numbers"
- "Generate Random Numbers That Are Repeatable"
- "Generate Random Numbers That Are Different"

Input Arguments

`imax` — Largest integer in sample interval

positive integer

Largest integer in sample interval, specified as a positive integer. `randi` draws values from the uniform distribution in the sample interval `[1,imax]`.

Example: `randi(10,5)`

`imin` — Smallest integer in sample interval

1 (default) | scalar integer

Smallest integer in sample interval, specified as a scalar integer.

Both `imin` and `imax` must be integers that satisfy `imin` ≤ `imax`.

For example, `randi([50,100],5)` returns a 5-by-5 matrix of random integers between (and including) 50 and 100.

`n` — Size of square matrix

integer value

Size of square matrix, specified as an integer value.

- If `n` is `0`, then `X` is an empty matrix.
- If `n` is negative, then it is treated as `0`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz1,...,szN` — Size of each dimension (as separate arguments)
two or more integer values

Size of each dimension, specified as separate arguments of integer values.

- If the size of any dimension is `0`, then `X` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- Beyond the second dimension, `randi` ignores trailing dimensions with a size of 1. For example, `randi([5,10],3,1,1,1)` produces a 3-by-1 vector of random integers between 5 and 10.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz` — Size of each dimension (as a row vector)
integer values

Size of each dimension, specified as a row vector of integer values. Each element of this vector indicates the size of the corresponding dimension:

- If the size of any dimension is `0`, then `X` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- Beyond the second dimension, `randi` ignores trailing dimensions with a size of 1. For example, `randi([5,10],[3,1,1,1])` produces a 3-by-1 vector of random integers between 5 and 10.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`classname` — Data type (class) to create
`'double'` (default) | `'single'` | `'int8'` | `'uint8'` | ...

Output class, specified as `'double'`, `'single'`, `'int8'`, `'uint8'`, `'int16'`, `'uint16'`, `'int32'`, `'uint32'`, or the name of another class that provides `randi` support.

Example: `randi(5,5,'int8')`

Data Types: `char`

`p` — Prototype of array to create
numeric array

Prototype of array to create, specified as a numeric array.

Example: `randi(5,5,'like',p)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `uint8` | `uint16` | `uint32`
Complex Number Support: Yes

Tips

- The sequence of numbers produced by `randi` is determined by the internal settings of the uniform pseudorandom number generator that underlies `rand`, `randi`, and `randn`. You can control that shared random number generator using `rng`.
- The arrays returned by `randi` might contain repeated integer values. This behavior is sometimes referred to as sampling with replacement. Use `randperm` if you require all unique values.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The data type (class) must be a built-in MATLAB numeric type. Does not invoke the static `randi` method for other classes. For example, `randi(imax,sz,'myclass')` does not invoke `myclass.randi(imax,sz)`.
- Size arguments must have a fixed size.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`rand` | `randn` | `randperm` | `RandStream` | `rng`

Topics

"Random Integers"
"Create Arrays of Random Numbers"
"Generate Random Numbers That Are Repeatable"
"Generate Random Numbers That Are Different"
"Creating and Controlling a Random Number Stream"
"Class Support for Array-Creation Functions"
"Why Do Random Numbers Repeat After Startup?"

Introduced in R2008b

randi (RandStream)

Uniformly distributed pseudorandom integers

Class

`RandStream`

Syntax

```
r = randi(s,imax,n)
r = randi(s,imax,m,n)
r = randi(s,imax,[m,n])
r = randi(s,imax,m,n,p,...)
r = randi(s,imax,[m,n,p,...])
r = randi(s,imax)
r = randi(s,imax,size(A))
r = randi(s,[imin,imax],...)
r = randi(...,classname)
```

Description

`r = randi(s,imax,n)` returns an `n`-by-`n` matrix containing pseudorandom integer values drawn from the discrete uniform distribution on `1:imax`. `randi` draws those values from the random stream `s`.

`r = randi(s,imax,m,n)` or `r = randi(s,imax,[m,n])` returns an `m`-by-`n` matrix.

`r = randi(s,imax,m,n,p,...)` or `r = randi(s,imax,[m,n,p,...])` returns an `m`-by-`n`-by-`p`-by-... array.

`r = randi(s,imax)` returns a scalar.

`r = randi(s,imax,size(A))` returns an array the same size as `A`.

`r = randi(s,[imin,imax],...)` returns an array containing integer values drawn from the discrete uniform distribution on `imin:imax`.

`r = randi(...,classname)` returns an array of integer values of class `classname`. `classname` does not support 64-bit integers.

Note: The size inputs `m`, `n`, `p`, ... should be nonnegative integers. Negative integers are treated as 0.

The arrays returned by `randi` might contain repeated integer values. This is sometimes referred to as sampling with replacement. To get unique integer values, sometimes referred to as sampling without replacement, use `randperm (RandStream)`.

The sequence of numbers produced by `randi` is determined by the internal state of the random stream `s`. `randi` uses one uniform value from `s` to generate each integer value. Resetting `s` to the same fixed state allows computations to be repeated. Setting the stream to different states leads to unique computations, however, it does not improve any statistical properties.

See Also

`randi` | `RandStream` | `rand (RandStream)` | `randperm (RandStream)` | `randn (RandStream)`

randn

Normally distributed random numbers

Syntax

```
X = randn
X = randn(n)
X = randn(sz1,...,szN)
X = randn(sz)

X = randn( ___ ,typename)
X = randn( ___ ,'like',p)
```

Description

`X = randn` returns a random scalar drawn from the standard normal distribution.

`X = randn(n)` returns an `n`-by-`n` matrix of normally distributed random numbers.

`X = randn(sz1,...,szN)` returns an `sz1`-by-...-by-`szN` array of random numbers where `sz1,...,szN` indicate the size of each dimension. For example, `randn(3,4)` returns a 3-by-4 matrix.

`X = randn(sz)` returns an array of random numbers where size vector `sz` defines `size(X)`. For example, `randn([3 4])` returns a 3-by-4 matrix.

`X = randn( ___ ,typename)` returns an array of random numbers of data type `typename`. The `typename` input can be either `'single'` or `'double'`. You can use any of the input arguments in the previous syntaxes.

`X = randn( ___ ,'like',p)` returns an array of random numbers like `p`; that is, of the same object type as `p`. You can specify either `typename` or `'like'`, but not both.

Note: The `'seed'`, `'state'`, and `'twister'` inputs to the `randn` function are not recommended. Use the `rng` function instead. For more information, see "Replace Discouraged Syntaxes of rand and randn".

Examples

Matrix of Random Numbers

Generate a 5-by-5 matrix of normally distributed random numbers.

```
r = randn(5)
```

```
r =

    0.5377   -1.3077   -1.3499   -0.2050    0.6715
    1.8339   -0.4336    3.0349   -0.1241   -1.2075
   -2.2588    0.3426    0.7254    1.4897    0.7172
    0.8622    3.5784   -0.0631    1.4090    1.6302
    0.3188    2.7694    0.7147    1.4172    0.4889
```

Bivariate Normal Random Numbers

Generate values from a bivariate normal distribution with specified mean vector and covariance matrix.

```
mu = [1 2];
sigma = [1 0.5; 0.5 2];
R = chol(sigma);
z = repmat(mu,10,1) + randn(10,2)*R
```

```
z =

    1.5377    0.4831
    2.8339    6.9318
   -1.2588    1.8302
    1.8622    2.3477
    1.3188    3.1049
   -0.3077    1.0750
    0.5664    1.6190
    1.3426    4.1420
    4.5784    5.6532
    3.7694    5.2595
```

Random Complex Numbers

Generate a single random complex number with normally distributed real and imaginary parts.

```
a = randn + 1i*randn
```

```
a =
   0.5377 + 1.8339i
```

Reset Random Number Generator

Save the current state of the random number generator and create a 1-by-5 vector of random numbers.

```
s = rng;
r = randn(1,5)
```

```
r =

    0.5377    1.8339   -2.2588    0.8622    0.3188
```

Restore the state of the random number generator to `s`, and then create a new 1-by-5 vector of random numbers. The values are the same as before.

```
rng(s);
r1 = randn(1,5)
```

```
r1 =

    0.5377    1.8339   -2.2588    0.8622    0.3188
```

Always use the rng function (rather than the `rand` or `randn` functions) to specify the settings of the random number generator. For more information, see “Replace Discouraged Syntaxes of rand and randn”.

3-D Array of Random Numbers

Create a 3-by-2-by-3 array of random numbers.

```
X = randn([3,2,3])
```

```
X =

(:,:,1) =

    0.5377    0.8622
    1.8339    0.3188
   -2.2588   -1.3077


(:,:,2) =

   -0.4336    2.7694
    0.3426   -1.3499
    3.5784    3.0349


(:,:,3) =

    0.7254   -0.2050
   -0.0631   -0.1241
    0.7147    1.4897
```

Specify Data Type of Random Numbers

Create a 1-by-4 vector of random numbers whose elements are single precision.

```
r = randn(1,4,'single')
```

```
r = 1×4 single row vector

    0.5377    1.8339   -2.2588    0.8622
```

```
class(r)
```

```
ans =
'single'
```

Clone Size from Existing Array

Create a matrix of normally distributed random numbers with the same size as an existing array.

```
A = [3 2; -2 1];
sz = size(A);
X = randn(sz)
```

```
X =

    0.5377   -2.2588
    1.8339    0.8622
```

It is a common pattern to combine the previous two lines of code into a single line:

```
X = randn(size(A));
```

Clone Size and Data Type from Existing Array

Create a 2-by-2 matrix of single precision random numbers.

```
p = single([3 2; -2 1]);
```

Create an array of random numbers that is the same size and data type as `p`.

```
X = randn(size(p),'like',p)
```

```
X = 2×2 single matrix

    0.5377   -2.2588
    1.8339    0.8622
```

```
class(X)
```

```
ans =
'single'
```

Clone Distributed Array

If you have Parallel Computing Toolbox™, create a 1000-by-1000 distributed array of random numbers with underlying data type `single`. For the `distributed` data type, the `'like'` syntax clones the underlying data type in addition to the primary data type.

```
p = randn(1000,'single','distributed');
```

```
Starting parallel pool (parpool) using the 'local' profile ... connected to 4 workers.
```

Create an array of random numbers that is the same size, primary data type, and underlying data type as p.

```
X = randn(size(p),'like',p);
```

```
class(X)
```

```
ans =

distributed
```

```
classUnderlying(X)
```

```
ans =

single
```

- "Create Arrays of Random Numbers"
- "Random Numbers Within a Specific Range"
- "Random Numbers Within a Sphere"
- "Random Numbers from Normal Distribution with Specific Mean and Variance"

Input Arguments

n — Size of square matrix

integer value

Size of square matrix, specified as an integer value.

- If n is 0, then X is an empty matrix.
- If n is negative, then it is treated as 0.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

sz1,...,szN — Size of each dimension (as separate arguments)

integer values

Size of each dimension, specified as separate arguments of integer values.

- If the size of any dimension is `0`, then `X` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- Beyond the second dimension, `randn` ignores trailing dimensions with a size of 1. For example, `randn(3,1,1,1)` produces a 3-by-1 vector of random numbers.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz` — Size of each dimension (as a row vector)

integer values

Size of each dimension, specified as a row vector of integer values. Each element of this vector indicates the size of the corresponding dimension:

- If the size of any dimension is `0`, then `X` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- Beyond the second dimension, `randn` ignores trailing dimensions with a size of 1. For example, `randn([3,1,1,1])` produces a 3-by-1 vector of random numbers.

Example: `sz = [2,3,4]` creates a 2-by-3-by-4 array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`typename` — Data type (class) to create

`'double'` (default) | `'single'`

Data type (class) to create, specified as `'double'`, `'single'`, or the name of another class that provides `randn` support.

Example: `randn(5,'single')`

`p` — Prototype of array to create

numeric array

Prototype of array to create, specified as a numeric array.

Example: `randn(5,'like',p)`

Data Types: `single` | `double`
Complex Number Support: Yes

Tips

- The sequence of numbers produced by `randn` is determined by the internal settings of the uniform pseudorandom number generator that underlies `rand`, `randi`, and `randn`. You can control that shared random number generator using `rng`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The data type (class) must be a built-in MATLAB numeric type. For other classes, the static `randn` method is not invoked. For example, `randn(sz,'myclass')` does not invoke `myclass.randn(sz)`.
- Size arguments must have a fixed size.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`rand` | `randi` | `randperm` | `RandStream` | `rng` | `sprand` | `sprandn`

Topics

"Create Arrays of Random Numbers"
"Random Numbers Within a Specific Range"
"Random Numbers Within a Sphere"
"Random Numbers from Normal Distribution with Specific Mean and Variance"
"Creating and Controlling a Random Number Stream"
"Class Support for Array-Creation Functions"
"Replace Discouraged Syntaxes of rand and randn"

"Why Do Random Numbers Repeat After Startup?"

Introduced before R2006a

randn (RandStream)

Normally distributed pseudorandom numbers

Class

`RandStream`

Syntax

```
r = randn(s,m,n)
r = randn(s,[m,n])
r = randn(s,m,n,p,...)
r = randn(s,[m,n,p,...])
r = randn(s)
r = randn(s,size(A))
r = randn(...,'double')
r = randn(...,'single')
```

Description

`r = randn(s,n)` returns an `n`-by-`n` matrix containing pseudorandom values drawn from the standard normal distribution. `randn` draws those values from the random stream `s`.

`r = randn(s,m,n)` or `r = randn(s,[m,n])` returns an `m`-by-`n` matrix.

`r = randn(s,m,n,p,...)` or `r = randn(s,[m,n,p,...])` returns an `m`-by-`n`-by-`p`-by-... array.

`r = randn(s)` returns a scalar.

`r = randn(s,size(A))` returns an array the same size as `A`.

`r = randn(...,'double')` or `r = randn(...,'single')` returns an array of uniform values of the specified class.

Note: The size inputs `m`, `n`, `p`, ... should be nonnegative integers. Negative integers are treated as 0.

The sequence of numbers produced by `randn` is determined by the internal state of the random stream `s`. `randn` uses one or more uniform values from `s` to generate each normal value. Resetting that stream to the same fixed state allows computations to be repeated. Setting the stream to different states leads to unique computations, however, it does not improve any statistical properties.

See Also

`randn` | `RandStream` | `rand (RandStream)` | `randi (RandStream)`

randperm

Random permutation

Syntax

```
p = randperm(n)
p = randperm(n,k)
```

Description

`p = randperm(n)` returns a row vector containing a random permutation of the integers from 1 to `n` inclusive.

`p = randperm(n,k)` returns a row vector containing `k` unique integers selected randomly from 1 to `n` inclusive.

Examples

```
randperm(6)
```
might be the vector

```
[3  2  6  4  1  5]
```
or it might be some other permutation of the integers from 1 to 6, depending on the state of the random number generator. Two successive calls to `randperm` would in most cases return two different vectors:

```
randperm(6)
ans =
     5     2     6     4     1     3

randperm(6)
ans =
     4     1     6     2     3     5
```

```
 randperm(6,3)
```
might be the vector

```
[4 2 5]
```

or it might be some other permutation of any three integers from 1 to 6 inclusive, depending on the state of the random number generator.

Tips

For `p = randperm(n,k)`, `p` contains `k` *unique* values. `randperm` performs k-permutations (sampling without replacement). To allow repeated values in the output (sampling with replacement), use `randi(n,1,k)`.

`randperm` uses the same random number generator as `rand`, `randi`, and `randn`. You control this generator with `rng`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`randperm(RandStream)` | `perms` | `rng` | `permute` | `nchoosek` | `randi`

Introduced before R2006a

randperm (RandStream)

Random permutation

Class

RandStream

Syntax

```
p = randperm(s,n)
p = randperm(s,n,k)
```

Description

`p = randperm(s,n)` returns a row vector containing a random permutation of integers from 1 to `n` inclusive. `randperm(s,n)` uses random values drawn from the random stream `s`.

`p = randperm(s,n,k)` returns a row vector containing `k` unique integers selected randomly from 1 to `n` inclusive.

Examples

Create a random stream `s` and generate a random permutation of the integers from 1 to 6 based on `s`:

```
s = RandStream('mt19937ar','Seed',0);
randperm(s,6)
```

MATLAB returns the vector

```
[6     3     5     1     2     4]
```

Use the random stream `s` to generate three integers between 1 and 10:

```
randperm(s,10,3)
```

```
ans =
     1     8     9
```

Tips

For `p = randperm(s,n,k)`, `p` contains `k` *unique* values. `randperm` performs k-permutations (sampling without replacement). To allow repeated values in the output (sampling with replacement), use `randi(s,n,1,k)`.

See Also

`permute` | `randi (RandStream)` | `randperm` | `nchoosek` | `perms` | `rand`

RandStream

Random number stream

Constructor

`RandStream`

Description

Pseudorandom numbers in MATLAB come from one or more random number streams. The simplest way to generate arrays of random numbers is to use `rand`, `randn`, or `randi`. These functions all rely on the same stream of uniform random numbers, known as the *global stream*. You can create other streams that act separately from the global stream, and you can use their `rand`, `randi`, or `randn` methods to generate arrays of random numbers. You can also create a random number stream and make it the global stream.

To create a single random number stream, use the `RandStream` constructor. To create multiple independent random number streams, use `RandStream.create`. The `rng` function provides a simple interface to create a new global stream.

`stream = RandStream.getGlobalStream` returns the global random number stream, that is, the one currently used by the `rand`, `randi`, and `randn` functions.

`prevstream = RandStream.setGlobalStream(stream)` designates the random number stream `stream` as the new global stream to be used by the `rand`, `randi`, and `randn` functions, and returns the previous global stream.

A random number stream `s` has properties that control its behavior. Access or assign to a property using `p = s.Property` or `s.Property = p`. The following table lists defined properties:

Properties

Property	Description
`Type`	(Read-only) Generator algorithm used by the stream. The list of possible generators is given by `RandStream.list`.
`Seed`	(Read-only) Seed value used to create the stream.
`NumStreams`	(Read-only) Number of streams in the group in which the current stream was created.
`StreamIndex`	(Read-only) Index of the current stream from among the group of streams with which it was created.
`State`	Internal state of the generator. You should not depend on the format of this property. The value you assign to `S.State` must be a value read from `S.State` previously. Use `reset` to return a stream to a predictable state without having previously read from the `State` property. The sequence of random numbers produced by a random number stream `s` is determined by the internal state of its random number generator. Saving and restoring the generator's internal state with the `State` property allows you to reproduce a sequence of random numbers.
`Substream`	Index of the substream to which the stream is currently set. The default is 1. Multiple substreams are not supported by all generator types; the multiplicative lagged Fibonacci generator (`mlfg6331_64`) and combined multiple recursive generator (`mrg32k3a`) support substreams.
`NormalTransform`	Transformation algorithm used by `randn(s, ...)` to generate normal pseudorandom values. Possible values are `'Ziggurat'`, `'Polar'`, or `'Inversion'`.

Property	Description
`Antithetic`	Logical value indicating whether `S` generates antithetic pseudorandom values, that is, the usual values subtracted from 1. The default is false.
`FullPrecision`	Logical value indicating whether `S` generates values using its full precision. Some generators can create pseudorandom values faster, but with fewer random bits, if `FullPrecision` is false. The default is true.

Methods

Method	Description
`RandStream`	Create a random number stream.
`RandStream.create`	Create multiple independent random number streams.
`get`	Get the properties of a random stream object.
`list`	List available random number generator algorithms.
`set`	Set random stream property.
`RandStream.getGlobalStream`	Get the global random number stream.
`RandStream.setGlobalStream`	Set global random number stream.
`reset`	Reset a stream to its initial internal state
`rand`	Pseudorandom numbers from a uniform distribution
`randn`	Pseudorandom numbers from a standard normal distribution
`randi`	Pseudorandom integers from a uniform discrete distribution
`randperm`	Random permutation of a set of values

Examples

Example 1

Create a single stream and designate it as the current global stream:

```
s = RandStream('mt19937ar','Seed',1);
RandStream.setGlobalStream(s);
```

Example 2

Create three independent streams:

```
[s1,s2,s3] = RandStream.create('mrg32k3a','NumStreams',3);
r1 = rand(s1,100000,1);
r2 = rand(s2,100000,1);
r3 = rand(s3,100000,1);
corrcoef([r1,r2,r3])
```

Example 3

Create only one stream from a set of three independent streams, and designate it as the current global stream:

```
s2 = RandStream.create('mrg32k3a','NumStreams',3,...
     'StreamIndices',2);
RandStream.setGlobalStream(s2);
```

Example 4

Reset the global random number stream that underlies `rand`, `randi`, and `randn` back to its beginning, to reproduce previous results:

```
stream = RandStream.getGlobalStream;
reset(stream);
```

Example 5

Save and restore the current global stream's state to reproduce the output of `rand`:

```
stream = RandStream.getGlobalStream;
savedState = stream.State;
u1 = rand(1,5)
u1 =
    0.8147    0.9058    0.1270    0.9134    0.6324

stream.State = savedState;
u2 = rand(1,5)
u2 =
    0.8147    0.9058    0.1270    0.9134    0.6324
```

`u2` contains exactly the same values as `u1`.

Example 6

Reset the global random number stream to its initial settings. This causes `rand`, `randi`, and `randn` to start over, as if in a new MATLAB session:

```
s = RandStream('mt19937ar','Seed',0);
RandStream.setGlobalStream(s);
```

Example 7

Reinitialize the global random number stream using a seed based on the current time. This causes `rand`, `randi`, and `randn` to return different values in different MATLAB sessions. It is usually not desirable to do this more than once per MATLAB session as it may affect the statistical properties of the random numbers MATLAB produces:

```
s = RandStream('mt19937ar','Seed','shuffle');
RandStream.setGlobalStream(s);
```

Example 8

Change the transformation algorithm that `randn` uses to create normal pseudorandom values from uniform values. This does not replace or reset the global stream.

```
stream = RandStream.getGlobalStream;
stream.NormalTransform = 'inversion'
```

See Also

`rand` | `rng` | `randn` | `randi`

RandStream constructor

Random number stream

Class

`RandStream`

Syntax

```
s = RandStream('gentype')
s = RandStream('gentype',Name,Value)
```

Description

`s = RandStream('gentype')` creates a random number stream that uses the uniform pseudorandom number generator algorithm specified by `gentype`. `RandStream.list` returns all possible values for `gentype`, or see "Choosing a Random Number Generator" for details on generator algorithms.

`s = RandStream('gentype',Name,Value)` allows you to specify one or more optional `Name,Value` pairs to control creation of the stream.

Once you have created a random, you can use `RandStream.setGlobalStream` to make it the global stream, so that the functions `rand`, `randi`, and `randn` draw values from it.

Parameters for `RandStream` are:

Parameter	Description
`Seed`	Nonnegative scalar integer with which to initialize all streams. Seeds must be an integer between 0 and $2^{32} - 1$ or `'shuffle'` to create a seed based on the current time. Default is 0.

Parameter	Description
`NormalTransform`	Transformation algorithm used by `randn(s, ...)` to generate normal pseudorandom values. Possible values are `'Ziggurat'`, `'Polar'`, or `'Inversion'`.

Examples

Example 1

Create a random number stream, make it the global stream, and save and restore its state to reproduce the output of `randn`:

```
s = RandStream('mrg32k3a');
RandStream.setGlobalStream(s);
savedState = s.State;
z1 = randn(1,5)
z1 =
   -0.1894   -1.4426   -0.3592    0.8883   -0.4337
s.State = savedState;
z2 = randn(1,5)
z2 =
   -0.1894   -1.4426   -0.3592    0.8883   -0.4337
```

`z2` contains exactly the same values as `z1`.

Example 2

Return `rand`, `randi`, and `randn` to their default startup settings:

```
s = RandStream('mt19937ar','Seed',0)
RandStream.setGlobalStream(s);
```

Example 3

Replace the current global random number stream with a stream whose seed is based on the current time, so `rand`, `randi`, and `randn` will return different values in different MATLAB sessions. It is usually not desirable to do this more than once per MATLAB

session as it may affect the statistical properties of the random numbers MATLAB produces:

```
s = RandStream('mt19937ar','Seed','shuffle');
RandStream.setGlobalStream(s);
```

Tips

- Streams created using `RandStream` might not be independent from each other. Use `RandStream.create` to create multiple streams that are independent.

See Also

`RandStream` | `RandStream.rand` | `RandStream.randn` | `RandStream.randi` | `RandStream.getGlobalStream` | `RandStream.setGlobalStream` | `RandStream.list` | `rng` | `RandStream.create`

RandStream.getGlobalStream

Current global random number stream

Class

`@RandStream`

Syntax

```
stream = RandStream.getGlobalStream
```

Description

`stream = RandStream.getGlobalStream` returns the current global random number stream.

`rand`, `randi`, and `randn` all rely on the same stream of uniform pseudorandom numbers, known as the *global stream*. `rand` draws one value from that stream to generate each uniform value it returns. `randi` draws one uniform value from that stream to generate each integer value it returns. And `randn` draws one or more uniform values to generate each normal value it returns. Note that there are also `rand`, `randi`, and `randn` methods for which you specify a specific random stream from which to draw values.

Note: The `rng` function is a shorter alternative for many common uses of `RandStream.getGlobalStream`.

See Also

See Also

`rand` | `randi` | `randn` | `RandStream` | `RandStream.setGlobalStream` | `rng`

Topics

"Creating and Controlling a Random Number Stream"

"Managing the Global Stream"

RandStream.setGlobalStream

Set global random number stream

Syntax

```
prevstream = RandStream.setGlobalStream(stream)
```

Description

`prevstream = RandStream.setGlobalStream(stream)` designates the random number stream, specified as `stream`, to be the global stream that the `rand`, `randi`, and `randn` functions draw values from. It returns the previous global random number stream as `prevstream`.

`rand`, `randi`, and `randn` all rely on the same stream of uniform pseudorandom numbers, known as the *global stream*. `rand` draws one value from that stream to generate each uniform value it returns. `randi` draws one uniform value from that stream to generate each integer value it returns. And `randn` draws one or more uniform values to generate each normal value it returns. Note that there are also `rand`, `randi`, and `randn` methods for which you specify a specific random stream from which to draw values.

Note: The `rng` function is a shorter alternative for many common uses of `RandStream.setGlobalStream`.

See Also

See Also

`rand` | `randi` | `randn` | `RandStream` | `RandStream.getGlobalStream` | `rng`

Topics

"Creating and Controlling a Random Number Stream"
"Managing the Global Stream"

rank

Rank of matrix

Syntax

```
k = rank(A)
k = rank(A,tol)
```

Description

The `rank` function provides an estimate of the number of linearly independent rows or columns of a full matrix.

`k = rank(A)` returns the number of singular values of `A` that are larger than the default tolerance, `max(size(A))*eps(norm(A))`.

`k = rank(A,tol)` returns the number of singular values of `A` that are larger than `tol`.

Tips

Use `sprank` to determine the structural rank of a sparse matrix.

Algorithms

There are a number of ways to compute the rank of a matrix. MATLAB software uses the method based on the singular value decomposition, or SVD. The SVD algorithm is the most time consuming, but also the most reliable.

The `rank` algorithm is

```
s = svd(A);
tol = max(size(A))*eps(max(s));
r = sum(s > tol);
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`sprank`

Introduced before R2006a

rat

Rational fraction approximation

Syntax

```
R = rat(X)
R = rat(X,tol)

[N,D] = rat( ___ )
```

Description

`R = rat(X)` returns the rational fraction approximation of `X` to within the default tolerance, `1e-6*norm(X(:),1)`. The approximation is a character array containing the truncated continued fractional expansion.

`R = rat(X,tol)` approximates `X` to within the tolerance, `tol`.

`[N,D] = rat( ___ )` returns two arrays, `N` and `D`, such that `N./D` approximates `X`, using any of the above syntaxes.

Examples

Approximate Value of π

Approximate the value of π using a rational representation of the quantity `pi`.

The mathematical quantity π is not a rational number, but the quantity `pi` that approximates it *is* a rational number since all floating-point numbers are rational.

Find the rational representation of `pi`.

```
format rat
pi
```

```
ans =
     355/113
```

The resulting expression is a character vector. You also can use `rats(pi)` to get the same answer.

Use `rat` to see the continued fractional expansion of `pi`.

```
R = rat(pi)
```

```
R =
'3 + 1/(7 + 1/(16))'
```

The result is an approximation by continued fractional expansion. If you consider the first two terms of the expansion, you get the approximation $3 + \frac{1}{7} = \frac{22}{7}$, which only agrees with `pi` to 2 decimals.

However, if you consider all three terms printed by `rat`, you can recover the value `355/113`, which agrees with `pi` to 6 decimals.

$$3 + \frac{1}{7 + \frac{1}{16}} = \frac{355}{113}$$

Specify a tolerance for additional accuracy in the approximation.

```
R = rat(pi,1e-7)
```

```
R =
'3 + 1/(7 + 1/(16 + 1/(-294)))'
```

The resulting approximation, `104348/33215`, agrees with `pi` to 9 decimals.

Express Array Elements as Ratios

Create a 4-by-4 matrix.

```
format short;
X = hilb(4)
```

```
X =

    1.0000    0.5000    0.3333    0.2500
    0.5000    0.3333    0.2500    0.2000
    0.3333    0.2500    0.2000    0.1667
    0.2500    0.2000    0.1667    0.1429
```

Express the elements of `X` as ratios of small integers using `rat`.

```
[N,D] = rat(X)
```

```
N =

     1     1     1     1
     1     1     1     1
     1     1     1     1
     1     1     1     1


D =

     1     2     3     4
     2     3     4     5
     3     4     5     6
     4     5     6     7
```

The two matrices, `N` and `D`, approximate `X` with `N./D`.

View the elements of `X` as ratios using `format rat`.

```
format rat
X
```

```
X =
       1              1/2            1/3            1/4
       1/2            1/3            1/4            1/5
       1/3            1/4            1/5            1/6
       1/4            1/5            1/6            1/7
```

In this form, it is clear that `N` contains the numerators of each fraction and `D` contains the denominators.

Input Arguments

X — Input array
numeric array

Input array, specified as a numeric array of class `single` or `double`.

Data Types: `single` | `double`
Complex Number Support: Yes

tol — Tolerance
scalar

Tolerance, specified as a scalar. `N` and `D` approximate `X`, such that `N./D - X < tol`. The default tolerance is `1e-6*norm(X(:),1)`.

Output Arguments

R — Continued fraction
character array

Continued fraction, returned as a character array with `m` rows, where `m` is the number of elements in `X`. The accuracy of the rational approximation via continued fractions increases with the number of terms.

N — Numerator
numeric array

Numerator, returned as a numeric array. `N./D` approximates `X`.

D — Denominator
numeric array

Denominator, returned as a numeric array. `N./D` approximates `X`.

Algorithms

Even though all floating-point numbers are rational numbers, it is sometimes desirable to approximate them by simple rational numbers, which are fractions whose numerator

and denominator are small integers. Rational approximations are generated by truncating continued fraction expansions.

The `rat` function approximates each element of `X` by a continued fraction of the form

$$\frac{N}{D} = D_1 + \frac{1}{D_2 + \frac{1}{\left(D_3 + \ldots + \frac{1}{D_k}\right)}}.$$

The *D*s are obtained by repeatedly picking off the integer part and then taking the reciprocal of the fractional part. The accuracy of the approximation increases exponentially with the number of terms and is worst when `X = sqrt(2)`. For `X = sqrt(2)` , the error with `k` terms is about `2.68*(.173)^k`, so each additional term increases the accuracy by less than one decimal digit. It takes 21 terms to get full floating-point accuracy.

See Also

See Also

`format` | `rats`

Introduced before R2006a

rats

Rational output

Syntax

```
S = rats(X)
S = rats(X,strlen)
```

Description

`S = rats(X)` returns a character vector containing the rational approximations to the elements of `X` using the default length of `13`.

`rats` returns asterisks for elements that cannot be printed in the allotted space, but which are not negligible compared to the other elements in `X`.

`S = rats(X,strlen)` returns a character vector of length `strlen`. The rational approximation uses a tolerance that is inversely proportional to the length.

Examples

Rational Representation of Matrix

Create a 4-by-4 matrix.

```
format short
X = hilb(4)
```

```
X =

    1.0000    0.5000    0.3333    0.2500
    0.5000    0.3333    0.2500    0.2000
    0.3333    0.2500    0.2000    0.1667
    0.2500    0.2000    0.1667    0.1429
```

View the rational representation of the matrix using `rats`. The result is the same as using `format rat`.

```
R = rats(X)
```

```
R = 4×56 char array
    '       1            1/2           1/3           1/4     '
    '      1/2           1/3           1/4           1/5     '
    '      1/3           1/4           1/5           1/6     '
    '      1/4           1/5           1/6           1/7     '
```

Adjust Output Vector Length

Find the rational representation of `pi` with the default character vector length and approximation tolerance. The result is the same as using `format rat`.

```
rats(pi)
```

```
ans =
'    355/113   '
```

Adjust the length of the output, which also adjusts the approximation tolerance.

```
rats(pi,20)
```

```
ans =
'    104348/33215     '
```

The resulting rational approximation has greater accuracy. As the output length increases, the tolerance decreases.

Adjust the output length again to achieve greater accuracy.

```
rats(pi,25)
```

```
ans =
'      1146408/364913       '
```

The resulting approximation agrees with `pi` to 10 decimal places.

Input Arguments

X — Input array
numeric array

Input array, specified as a numeric array of class `single` or `double`.

Data Types: `single` | `double`
Complex Number Support: Yes

`strlen` — Length of character vector
positive integer

Length of character vector, specified as a positive integer. The default length is 13, which allows for 6 elements in 78 spaces.

Output Arguments

`S` — Rational output
character vector

Rational output, returned as a character vector.

Algorithms

`rats` obtains rational approximations with `[N,D] = rat(X,tol)`, where `tol` is `min(10^(-(strlen-1)/2)*norm(X(isfinite(X)),1),.1)`. Thus, the tolerance is inversely proportional to the output length, `strlen`.

See Also

See Also
`format` | `rat`

Introduced before R2006a

rbbox

Create rubberband box for area selection

Syntax

```
rbbox
rbbox(initialRect)
rbbox(initialRect,fixedPoint)
rbbox(initialRect,fixedPoint,stepSize)
finalRect = rbbox(...)
```

Description

`rbbox` initializes and tracks a rubberband box in the current figure. It sets the initial rectangular size of the box to 0, anchors the box at the figure's `CurrentPoint`, and begins tracking from this point.

`rbbox(initialRect)` specifies the initial location and size of the rubberband box as `[x y width height]`, where `x` and `y` define the lower left corner, and `width` and `height` define the size. `initialRect` is in the units specified by the current figure's `Units` property, and measured from the lower left corner of the figure window. The corner of the box closest to the pointer position follows the pointer until `rbbox` receives a button-up event.

`rbbox(initialRect,fixedPoint)` specifies the corner of the box that remains fixed. All arguments are in the units specified by the current figure's `Units` property, and measured from the lower left corner of the figure window. `fixedPoint` is a two-element vector, `[x y]`. The tracking point is the corner diametrically opposite the anchored corner defined by `fixedPoint`.

`rbbox(initialRect,fixedPoint,stepSize)` specifies how frequently the rubberband box is updated. When the tracking point exceeds `stepSize` figure units, `rbbox` redraws the rubberband box. The default stepsize is `1`.

`finalRect = rbbox(...)` returns a four-element vector, `[x y width height]`, where `x` and `y` are the *x* and *y* components of the lower left corner of the box, and `width` and `height` are the dimensions of the box.

Examples

Create an annotation rectangle by rubber banding the rectangle size in the figure.

```
set(gcf,'Units','normalized')
k = waitforbuttonpress;
rect_pos = rbbox;
annotation('rectangle',rect_pos,'Color','red')
```

Execute the code, click down and drag a rectangle within the figure. Releasing the mouse button draws a rectangle in the figure.

Tips

`rbbox` is useful for defining and resizing a rectangular region:

- For box definition, `initialRect` is `[x y 0 0]`, where `(x,y)` is the figure's `CurrentPoint`.
- For box resizing, `initialRect` defines the rectangular region that you resize (e.g., a legend). `fixedPoint` is the corner diametrically opposite the tracking point.

`rbbox` returns immediately if a button is not currently pressed. Therefore, you use `rbbox` with `waitforbuttonpress` so that the mouse button is down when `rbbox` is called. `rbbox` returns when you release the mouse button.

See Also

`axis` | `dragrect` | `waitforbuttonpress`

Introduced before R2006a

rcond

Reciprocal condition number

Syntax

```
C = rcond(A)
```

Description

`C = rcond(A)` returns an estimate for the reciprocal condition of `A` in 1-norm. If `A` is well conditioned, `rcond(A)` is near 1.0. If `A` is badly conditioned, `rcond(A)` is near 0.

Examples

Sensitivity of Badly Conditioned Matrix

Examine the sensitivity of a badly conditioned matrix.

A notable matrix that is symmetric and positive definite, but badly conditioned, is the Hilbert matrix. The elements of the Hilbert matrix are $H(i,j) = 1/(i + j - 1)$.

Create a 10-by-10 Hilbert matrix.

```
A = hilb(10);
```

Find the reciprocal condition number of the matrix.

```
C = rcond(A)
```

```
C = 2.8286e-14
```

The reciprocal condition number is small, so `A` is badly conditioned.

The condition of `A` has an effect on the solutions of similar linear systems of equations. To see this, compare the solution of $Ax = b$ to that of the perturbed system, $Ax = b + 0.01$.

Create a column vector of ones and solve $Ax = b$.

```
b = ones(10,1);
x = A\b;
```

Now change b by `0.01` and solve the perturbed system.

```
b1 = b + 0.01;
x1 = A\b1;
```

Compare the solutions, `x` and `x1`.

```
norm(x-x1)
```

```
ans = 1.1250e+05
```

Since `A` is badly conditioned, a small change in `b` produces a very large change (on the order of 1e5) in the solution to `x = A\b`. The system is sensitive to perturbations.

Find Condition of Identity Matrix

Examine why the reciprocal condition number is a more accurate measure of singularity than the determinant.

Create a 5-by-5 multiple of the identity matrix.

```
A = eye(5)*0.01;
```

This matrix is full rank and has five equal singular values, which you can confirm by calculating `svd(A)`.

Calculate the determinant of `A`.

```
det(A)
```

```
ans = 1.0000e-10
```

Although the determinant of the matrix is close to zero, `A` is actually very well conditioned and *not* close to being singular.

Calculate the reciprocal condition number of `A`.

```
rcond(A)
```

```
ans = 1
```

The matrix has a reciprocal condition number of `1` and is, therefore, very well conditioned. Use `rcond(A)` or `cond(A)` rather than `det(A)` to confirm singularity of a matrix.

Input Arguments

`A` — Input matrix

square numeric matrix

Input matrix, specified as a square numeric matrix.

Data Types: `single` | `double`

Output Arguments

`C` — Reciprocal condition number

scalar

Reciprocal condition number, returned as a scalar. The data type of `C` is the same as `A`.

The reciprocal condition number is a scale-invariant measure of how close a given matrix is to the set of singular matrices.

- If `C` is near 0, the matrix is nearly singular and badly conditioned.
- If `C` is near 1.0, the matrix is well conditioned.

Tips

- `rcond` is a more efficient but less reliable method of estimating the condition of a matrix compared to the condition number, `cond`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cond` | `condest` | `norm` | `normest` | `rank` | `svd`

Introduced before R2006a

rdivide, ./

Right array division

Syntax

```
x = A./B
x = rdivide(A,B)
```

Description

`x = A./B` divides each element of `A` by the corresponding element of `B`.

`x = rdivide(A,B)` is an alternative way to divide `A` by `B`, but is rarely used. It enables operator overloading for classes.

Examples

Divide Two Numeric Arrays

Create two numeric arrays, `A` and `B`, and divide the second array, `B`, into the first, `A`.

```
A = [2 4 6 8; 3 5 7 9];
B = 10*ones(2,4);
x = A./B
```

```
x =

    0.2000    0.4000    0.6000    0.8000
    0.3000    0.5000    0.7000    0.9000
```

Integer Division

Divide an `int16` scalar value by each element of an `int16` vector.

```
a = int16(10);
b = int16([3 4 6]);
x = a./b
```

```
x = 1×3 int16 row vector

   3   3   2
```

MATLAB® rounds the results when dividing integer data types.

Divide Scalar by Array

Create an array and divide it into a scalar.

```
C = 5;
D = magic(3);
x = C./D
```

```
x =

    0.6250    5.0000    0.8333
    1.6667    1.0000    0.7143
    1.2500    0.5556    2.5000
```

When you specify a scalar value to be divided by an array, the scalar value expands into an array of the same size, then element-by-element division is performed.

Input Arguments

A — Numerator

scalar | vector | matrix | multidimensional array

Numerator, specified as a scalar, vector, matrix, or multidimensional array. Numeric inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Duration arrays must be the same size unless one is a scalar.

If B is an integer data type, then A must be the same integer type or be a scalar double.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration` | `char`

Complex Number Support: Yes

B — Denominator
scalar | vector | matrix | multidimensional array

Denominator, specified as a scalar, vector, matrix, or multidimensional array. Numeric inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Duration arrays must be the same size unless one is a scalar.

If A is an integer data type, then B must be the same integer type or be a scalar double.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration` | `char`
Complex Number Support: Yes

Output Arguments

x — Solution
scalar | vector | matrix | multidimensional array

Solution, returned as a scalar, vector, matrix or multidimensional array. If either A or B is an integer data type, then x is that same integer data type.

Tips

- When dividing integers, use `idivide` for more rounding options.
- MATLAB does not support complex integer division.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`idivide` | `ldivide` | `mldivide` | `mrdivide`

Topics

“Array vs. Matrix Operations”
“Operator Precedence”
“MATLAB Operators and Special Characters”

Introduced before R2006a

read

Class: Tiff

Read entire image

Syntax

```
imageData = read(tiffobj)
[Y,Cb,Cr] = read(tiffobj)
```

Description

`imageData = read(tiffobj)` reads the image data from the current image file directory (IFD) in the TIFF file associated with the `Tiff` object, `tiffobj`.

`[Y,Cb,Cr] = read(tiffobj)` reads the YCbCr component data from the current directory in the TIFF file. Depending upon the values of the `YCbCrSubSampling` tag, the size of the `Cb` and `Cr` channels might differ from the `Y` channel.

Examples

Open a `Tiff` object and read data from the TIFF file:

```
t = Tiff('example.tif','r');
imageData = read(t);
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

See Also

Tiff.write | `imread`

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

read

Read data from remote host over TCP/IP

Syntax

```
read(t)
read(t,size)
read(t,size,datatype)
```

Description

`read(t)` reads all available bytes of data from `tcpclient` object `t` connected to the remote host and returns the data. The number of values read is determined by the `BytesAvailable` property.

For any read or write operation, the data type is converted to `uint8` for the data transfer. It is then converted back to whatever data type you set if you specified another data type.

`read(t,size)` reads the specified number of values, `size`, from `tcpclient` object `t` connected to the remote host and returns the data. If `size` is greater than the object's `BytesAvailable` property, then the function waits until the specified amount of data is read or the `timeout` is reached.

`read(t,size,datatype)` reads the specified number of values, `size`, with the specified precision, `datatype`, from `tcpclient` object `t` connected to the remote host and returns the data. The `datatype` argument is a character vector of a standard MATLAB data type.

For any read or write operation, the data type is converted to `uint8` for the data transfer. It is then converted back to whatever data type you set if you specified another data type.

Examples

Read All Available Data from Host

Create a TCP/IP object called `t`, using the IP address shown, and Port of `4012`.

```
t = tcpclient('172.28.154.231', 4012)
```

```
t = 

   tcpclient with properties:

           Address: '172.28.154.231'
              Port: 4012
           Timeout: 10
   BytesAvailable: 0
```

Read all the bytes of data available.

```
read(t)
```

The `read` function used with no arguments reads all available bytes of data from `tcpclient` object `t` connected to the remote host and returns the data. The number of values read is determined by the `BytesAvailable` property, which is equal to the numbers of bytes available in the input buffer.

Close the connection between the TCP/IP client object and the remote host by clearing the object.

```
clear t
```

Specify the Size and Data Type to Read

Create a TCP/IP object called `t`, connecting to a TCP/IP echo server, with Port of `7`.

```
t = tcpclient('localhost', 7)
```

```
t = 

   tcpclient with properties:

           Address: 'local host'
              Port: 7
           Timeout: 10
```

```
   BytesAvailable: 0
```

Assign 10 bytes of data to the variable `data`.

```
data = (1:10)
```

Check the data.

```
whos data
```

```
Name      Size      Bytes      Class      Attributes

data      1x10         10      double
```

Write data to the echo server.

```
write(t, data)
```

Check that the data was written using the `BytesAvailable` property.

```
t.BytesAvailable
```

```
ans =

    80
```

For any read or write operation, the data type is converted to `uint8` for the data transfer. It is then converted back to whatever data type you set if you specified another data type. Since 1 `double` equals 8 `uint8` bytes, there are 80 bytes available.

Read 10 doubles from the server. The object name is always the first argument. The `size` argument must be the second argument, and `datatype` must be the third argument.

```
read(t, 10, 'double')
```

```
ans =

  1     2     3     4     5     6     7     8     9     10
```

Close the connection between the TCP/IP client object and the remote host by clearing the object.

```
clear t
```

- “Create a TCP/IP Connection”

- "Configure Properties for TCP/IP Communication"
- "Write and Read Data over TCP/IP Interface"

Input Arguments

`size` — Number of bytes to read

numeric scalar

Number of bytes to read, specified as a numeric scalar. Size cannot be set to `inf`. If `size` is greater than the object's `BytesAvailable` property, the function waits until the specified amount of data is read. The first argument must be the object name, and the second argument is the size. The `size` argument is optional.

Example: `read(t, 5)`

Data Types: `double`

`datatype` — MATLAB data type

`'uint8'` (default) | `'int8'` | `'uint16'` | `'int16'` | `'uint32'` | `'int32'` | `'uint64'` | `'int64'` | `'single'` | `'double'`

MATLAB data type, specified as a character vector. Size cannot be set to `inf`. The `datatype` must be set to one of the 10 values shown above. The first argument must be the object name, the second argument is the size, and the third argument is the data type. The `size` and `datatype` arguments are optional.

For any read or write operation, the data type is converted to `uint8` for the data transfer. It is then converted back to whatever data type you set if you specified another data type.

Example: `read(t, 10, 'double')`

Data Types: `char`

See Also

Topics

"Create a TCP/IP Connection"
"Configure Properties for TCP/IP Communication"

"Write and Read Data over TCP/IP Interface"

Introduced in R2014b

readasync

Read data asynchronously from device

Syntax

```
readasync(obj)
readasync(obj,size)
```

Description

`readasync(obj)` initiates an asynchronous read operation on the serial port object, `obj`.

`readasync(obj,size)` asynchronously reads, at most, the number of bytes given by `size`. If `size` is greater than the difference between the `InputBufferSize` property value and the `BytesAvailable` property value, an error is returned.

Examples

This example creates the serial port object `s` on a Windows platform. It connects `s` to a Tektronix TDS 210 oscilloscope, configures `s` to read data asynchronously only if `readasync` is issued, and configures the instrument to return the peak-to-peak value of the signal on channel 1.

```
s = serial('COM1');
fopen(s)
s.ReadAsyncMode = 'manual';
fprintf(s,'Measurement:Meas1:Source CH1')
fprintf(s,'Measurement:Meas1:Type Pk2Pk')
fprintf(s,'Measurement:Meas1:Value?')
```

Begin reading data asynchronously from the instrument using `readasync`. When the read operation is complete, return the data to the MATLAB workspace using `fscanf`.

```
readasync(s)
```

```
s.BytesAvailable
```

```
ans =
     15
```

```
out = fscanf(s)
```

```
out =
2.0399999619E0
```

```
fclose(s)
```

Tips

Before you can read data, you must connect `obj` to the device with the `fopen` function. A connected serial port object has a `Status` property value of `open`. An error is returned if you attempt to perform a read operation while `obj` is not connected to the device.

Only use `readasync` to configure the `ReadAsyncMode` property to `manual`. `readasync` is ignored if used when `ReadAsyncMode` is `continuous`.

The `TransferStatus` property indicates if an asynchronous read or write operation is in progress. You can write data while an asynchronous read is in progress because serial ports have separate read and write pins. You can stop asynchronous read and write operations with the `stopasync` function.

You can monitor the amount of data stored in the input buffer with the `BytesAvailable` property. Additionally, you can use the `BytesAvailableFcn` property to execute a callback function when the terminator or the specified amount of data is read.

Rules for Completing an Asynchronous Read Operation

An asynchronous read operation with `readasync` completes when one of these conditions is met:

- The terminator specified by the `Terminator` property is read.
- The time specified by the `Timeout` property passes.
- The specified number of bytes is read.
- The input buffer is filled (if `size` is not specified).

Because `readasync` checks for the terminator, this function can be slow. To increase speed, you might want to configure `ReadAsyncMode` to `continuous` and continuously return data to the input buffer as soon as it is available from the device.

See Also

`fopen` | `stopasync` | `BytesAvailable` | `BytesAvailableFcn` | `ReadAsyncMode` | `Status` | `TransferStatus`

Introduced before R2006a

readEncodedStrip

Class: Tiff

Read data from specified strip

Syntax

```
stripData = readEncodedStrip(tiffobj,stripNumber)
[Y,Cb,Cr] = readEncodedStrip(tiffobj,stripNumber)
```

Description

`stripData = readEncodedStrip(tiffobj,stripNumber)` reads data from the strip specified by `stripNumber`. Strip numbers are one-based numbers.

`[Y,Cb,Cr] = readEncodedStrip(tiffobj,stripNumber)` reads YCbCr component data from the specified strip. The size of the chrominance components `Cb` and `Cr` might differ from the size of the luminance component `Y` depending on the value of the `YCbCrSubSampling` tag.

`readEncodeStrip` clips the last strip, if the strip extends past the `ImageLength` boundary.

Examples

Read a Strip

Read the first strip in the second image of a TIFF file.

Create a `Tiff` object associated with the example file, `example.tif`, and make the second image the current directory.

```
t = Tiff('example.tif','r');
setDirectory(t,2)
```

Read the data in the first strip. Then, close the `Tiff` object.

```
data = readEncodedStrip(t,1);
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFReadEncodedStrip` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.readEncodedTile | Tiff.isTiled

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

readEncodedTile

Class: Tiff

Read data from specified tile

Syntax

```
tileData = readEncodedTile(tiffobj,tileNumber)
[Y,Cb,Cr] = readEncodedTile(tiffobj,tileNumber)
```

Description

`tileData = readEncodedTile(tiffobj,tileNumber)` reads data from the tile specified by `tileNumber`. Tile numbers are one-based numbers.

`[Y,Cb,Cr] = readEncodedTile(tiffobj,tileNumber)` reads YCbCr component data from the specified tile. The size of the chrominance components `Cb` and `Cr` might differ from the size of the luminance component `Y`, depending on the value of the `YCbCrSubSampling` tag.

`readEncodedTile` clips tiles on the last row or right-most column of an image if the tile extends past the `ImageLength` and `ImageLength` boundaries.

Examples

Read a Tile

Create a `Tiff` object associated with the example file, `example.tif`. Then, read the first tile of data.

```
t = Tiff('example.tif','r');
data = readEncodedTile(t,1);
close(t)
```

References

This method corresponds to the `TIFFReadEncodedTile` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

See Also

Tiff.readEncodedStrip | Tiff.isTiled

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

readRGBAImage

Class: Tiff

Read image using RGBA interface

Syntax

```
[RGB,alpha] = readRGBAImage()
```

Description

`[RGB,alpha] = readRGBAImage()` reads an entire image using the RGBA interface. `RGB` consists of an `m`-by-`n`-by-3 colormetric image, where `m` and `n` are the height and width of the tile, respectively. `alpha` is the associated alpha matting. If the image does not have associated alpha matting, then `alpha` is a matrix with all values set to 255 (transparent).

The pixel values may be transformed depending upon the values of the following tags:

```
PhotometricInterpretation
BitsPerSample
SamplesPerPixel
Orientation
ExtraSamples
ColorMap
```

Examples

Return all image data as RGB, with associated alpha matting.

```
t = Tiff('example.tif','r');
t.setDirectory(2);
[RGB,A] = t.readRGBAImage();
t.close();
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFReadRGBAImage` function in the LibTIFF C API.

To use this method, you must be familiar with LibTIFF version 4.0.0, as well as the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.readRGBAStrip | Tiff.read | Tiff.readRGBATile

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

readRGBAStrip

Class: Tiff

Read strip data using RGBA interface

Syntax

```
[RGB,alpha] = readRGBAStrip(row)
```

Description

`[RGB,alpha] = readRGBAStrip(row)` reads a strip using the RGBA interface. `row` is a one-based number of any row contained by the strip. `RGB` consists of an `m`-by-`n`-by-3 colormetric image, where `m` and `n` are the height and width of the strip, respectively. `alpha` is the associated alpha matting. If the image does not have associated alpha matting, then `alpha` is a matrix with all values set to 255 (transparent).

The strip is clipped if the strip boundary extends past the end of the image.

The pixel values may be transformed depending upon the values of the following tags:

```
PhotometricInterpretation
BitsPerSample
SamplesPerPixel
Orientation
ExtraSamples
ColorMap
```

Examples

Open a `Tiff` object and read the strip of data that contains the first row, using the RGBA interface, from the example file, `example.tif`

```
t = Tiff('example.tif','r');
```

```
t.setDirectory(2);
[RGB,A] = t.readRGBAStrip(1);
t.close();
```

References

This method corresponds to the `TIFFReadRGBAStrip` function in the LibTIFF C API.

To use this method, you must be familiar with LibTIFF version 4.0.0, as well as the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

See Also

Tiff.readRGBATile | Tiff.readRGBAImage

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

readRGBATile

Class: Tiff

Read tile data using RGBA interface

Syntax

```
[RGB,alpha] = readRGBATile(row,col)
```

Description

`[RGB,alpha] = readRGBATile(row,col)` reads a tile using the RGBA interface. `row` and `col` are the one-based row and column numbers of any pixel in the requested tile. `RGB` consists of an `m`-by-`n`-by-3 colormetric image, where `m` and `n` are the height and width of the tile, respectively. `alpha` is the associated alpha matting. If the image does not have associated alpha matting, then `alpha` is a matrix with all values set to 255 (transparent).

The tile is clipped if the tile boundaries extend past the edges of the image.

The pixel values may be transformed depending upon the values of the following tags:

```
PhotometricInterpretation
BitsPerSample
SamplesPerPixel
Orientation
ExtraSamples
ColorMap
```

Examples

Open a `Tiff` object and read the first tile using the RGBA interface.

```
t = Tiff('example.tif','r');
```

```
t.setDirectory(1);
[RGB,A] = t.readRGBATile(1,1);
t.close();
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFReadRGBATile` function in the LibTIFF C API.

To use this method, you must be familiar with LibTIFF version 4.0.0, as well as the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.readRGBAStrip | Tiff.readRGBAImage

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

Remove

Convenience function for static .NET System.Delegate Remove method

Syntax

```
result = Remove(combinedDelegate,removedDelegate)
```

Description

`result = Remove(combinedDelegate,removedDelegate)` removes last instance of the `removedDelegate` delegate from the `combinedDelegate` delegate.

Input Arguments

`combinedDelegate`

.NET `System.Delegate` object. The combined delegate from which to remove the `removedDelegate` delegate.

Default:

`removedDelegate`

.NET `System.Delegate` object. The delegate to remove from the `combinedDelegate` delegate.

Default:

Output Arguments

`result`

.NET `System.Delegate` object. A new delegate which is the same as the `combinedDelegate` delegate except without the last instance of the `removedDelegate` delegate.

Alternatives

Use the static `Remove` method of the `System.Delegate` class.

See Also

`RemoveAll` | `Combine`

Topics

"Combine and Remove .NET Delegates"

External Websites

MSDN System.Delegate.Remove Method reference page

Introduced in R2011a

RemoveAll

Convenience function for static .NET System.Delegate RemoveAll method

Syntax

```
result = RemoveAll(combinedDelegate,removedDelegate)
```

Description

`result = RemoveAll(combinedDelegate,removedDelegate)` removes all instances of `removedDelegate` from `combinedDelegate`.

Input Arguments

`combinedDelegate`

.NET `System.Delegate` object. The combined delegate from which to remove all instances of the `removedDelegate` delegate.

Default:

`removedDelegate`

.NET `System.Delegate` object. The delegate to remove from the `combinedDelegate` delegate.

Default:

Output Arguments

`result`

.NET `System.Delegate` object. A new delegate which is the same as the `combinedDelegate` delegate except without all instances of the `removedDelegate` delegate.

Alternatives

Use the static `RemoveAll` method of the `System.Delegate` class.

See Also

`Remove` | `Combine`

Topics

"Combine and Remove .NET Delegates"

External Websites

MSDN System.Delegate.RemoveAll Method reference page

Introduced in R2011a

timeseries class

Create `timeseries` object

Description

Time series are data vectors sampled over time, in order, often at regular intervals. They are distinguished from randomly sampled data that form the basis of many other data analyses. Time series represent the time-evolution of a dynamic population or process. The linear ordering of time series gives them a distinctive place in data analysis, with a specialized set of techniques. Time series analysis is concerned with:

- Identifying patterns
- Modeling patterns
- Forecasting values

Construction

`ts = timeseries` creates an empty time-series object.

`ts = timeseries(tsname)` creates an empty time-series object using the name, `tsname`, for the time-series object. This name can differ from the time-series variable name.

`ts = timeseries(data)` creates the time-series object using the specified `data`.

`ts = timeseries(data,time)` creates the time-series object using the specified `data` and `time`.

`ts = timeseries(data,time,quality)` specifies quality in terms of codes defined by `QualityInfo.Code`.

`ts = timeseries(data,'Name',tsname)` creates the time-series object using the specified `data` and the name, `tsname`.

`ts = timeseries(data,time,'Name',tsname)` creates the time-series object using the specified `data`, `time`, and the name, `tsname`.

`ts = timeseries(data,time,quality,'Name',tsname)` uses the specified `quality` and the name, `tsname`.

Input Arguments

data

The time-series data, which can be an array of samples

tsname

Time-series name specified as a string

Default: `''`

time

The time vector.

When time values are date strings, you must specify `Time` as a cell array of date strings. When the time vector contains duplicate values:

- Duplicated values must occupy contiguous elements.
- Time values must not be decreasing.

Interpolating time-series data using methods like resample and synchronize can produce different results depending on whether the input `timeseries` contains duplicate times.

Default: A time vector that ranges from `0` to `N-1` with a 1-second interval, where `N` is the number of samples.

quality

An integer vector with values `-128` to `127` that specifies the quality in terms of codes defined by `QualityInfo.Code`

When `Quality` is a vector:

- `Quality` must have the same length as the time vector.
- Each `Quality` value applies to the corresponding data sample.

When `Quality` is an array:

- `Quality` must have the same size as the data array.
- Each `Quality` value applies to the corresponding data value of the `ts.data` array.

Properties

`Data`

Time-series data, where each data sample corresponds to a specific time

The data can be a scalar, a vector, or a multidimensional array. Either the first or last dimension of the data must align with `Time`.

By default, `NaN`s represent missing or unspecified data. Set the `TreatNaNasMissing` property to determine how missing data is treated in calculations.

Attributes:

`Dependent`	`true`

`DataInfo`

Contains fields for storing contextual information about `Data`:

- `Units` — String that specifies data units
- `Interpolation` — A `tsdata.interpolation` object that specifies the interpolation method for this `timeseries` object.

  Fields of the `tsdata.interpolation` object include:

  - `Fhandle` — Function handle to a user-defined interpolation function
  - `Name` — String that specifies the name of the interpolation method. Predefined methods include `'linear'` and `'zoh'` (zero-order hold). `'linear'` is the default.
- `UserData` — Any user-defined information entered as a string

`Events`

An array of `tsdata.event` objects that stores event information for this `timeseries` object.

You add events by using the `addevent` method. Fields of the `tsdata.event` object include the following:

- `EventData` — Any user-defined information about the event
- `Name` — String that specifies the name of the event
- `Time` — Time value when this event occurs, specified as a real number or a date string
- `Units` — Time units
- `StartDate` — A reference date specified in MATLAB date-string format. `StartDate` is empty when you have a numerical (non-date-string) time vector.

IsTimeFirst

Logical value (`true` or `false`) specifies whether the time vector is aligned with the first or last dimension of the `Data` array. The value is `false` for 3-D and higher dimensional data and `true` otherwise.

- `true` — The first dimension of the data array is aligned with the time vector. For example, `ts = timeseries(rand(3,3),1:3);`
- `false` — The last dimension of the data array is aligned with the time vector. For example: `ts = timeseries(rand(3,4,5),1:5);`

Attributes:

Dependent	true
SetAccess	'protected'

Length

Length of the time vector in the `timeseries` object

Attributes:

Dependent	true
SetAccess	'protected'

Name

The `timeseries` object name entered as a string, `tsname`.

This name can differ from the name of the `timeseries` variable in the MATLAB workspace.

`Quality`

An integer vector or array containing values `-128` to `127` that specify the quality in terms of codes defined by `QualityInfo.Code`.

When `Quality` is a vector, it must have the same length as the time vector. In this case, each `Quality` value applies to a corresponding data sample.

When `Quality` is an array, it must have the same size as the data array. In this case, each `Quality` value applies to the corresponding value of the data array.

Attributes:

`Dependent`	`true`

`QualityInfo`

Provides a lookup table that converts numerical `Quality` codes to readable descriptions.

`QualityInfo` fields include the following:

- `Code` — Integer vector containing values `-128` to `127` that define the "dictionary" of quality codes. You can assign one of these integer values to each `Data` value by using the `Quality` property.
- `Description` — Cell vector of strings, where each element provides a readable description of the associated quality `Code`.
- `UserData` — Stores any additional user-defined information.

Lengths of `Code` and `Description` must match.

`Time`

Array of time values.

When `TimeInfo.StartDate` is empty, the numerical `Time` values are measured relative to `0` in specified units. When `TimeInfo.StartDate` is defined, the time values are date strings measured relative to the `StartDate` in specified units.

The length of `Time` must be the same as either the first or the last dimension of `Data`. When the data contains three or more dimensions, the length of `Time` matches the size of the last data dimension. Otherwise, the length of `Time` matches the size of the first data dimension.

Attributes:

`Dependent`	`true`

`TimeInfo`

Uses the following fields for storing contextual information about `Time`:

- `Units` — Time units having any of following values: `'weeks'`, `'days'`, `'hours'`, `'minutes'`, `'seconds'`, `'milliseconds'`, `'microseconds'`, or `'nanoseconds'`
- `Start` — Start time
- `End` — End time (read only)
- `Increment` — Interval between two subsequent time values
- `Length` — Length of the time vector (read only)
- `Format` — String defining the date string display format. See the MATLAB `datestr` function reference page for more information.
- `StartDate` — Date string defining the reference date. See the MATLAB setabstime function reference page for more information.
- `UserData` — Stores any additional user-defined information

`TreatNaNasMissing`

Logical value that specifies how to treat `NaN` values in `Data`:

- `true` — (Default) Treats all `NaN` values as missing data except during statistical calculations.
- `false` — Includes `NaN` values in statistical calculations, in which case `NaN` values are propagated to the result.

`UserData`

Generic field for data of any class that you want to add to the object.

Default: [ ]

Methods

Time-Series Methods

-
-
-
-
-

Methods to Query and Set Object Properties and Plot the Data

get	Query `timeseries` object property values.
getdatasamplesize	Return the size of each data sample in a `timeseries` object.
getqualitydesc	Return data quality descriptions based on the `Quality` property values assigned to a `timeseries` object.
plot	Plot the `timeseries` object.
set	Set `timeseries` property values.

Methods to Manipulate Data and Time

addsample	Add a data sample to a `timeseries` object.
append	Concatenate `timeseries` objects in the time dimension.
delsample	Delete a sample from a `timeseries` object.
detrend	Subtract the mean or best-fit line and remove all `NaN`s from time-series data.
filter	Shape frequency content of time-series data using a 1-D digital filter.
getabstime	Extract a date-string time vector from a `timeseries` object into a cell array.

getdatasamples	Extract a subset of data samples from an existing `timeseries` object into an array using a subscripted indexed array.
getsamples	Extract a subset of data samples from an existing `timeseries` object into a new `timeseries` object using a subscript indexed array.
getinterpmethod	Get the interpolation method for a `timeseries` object.
getsampleusingtime	Extract data samples from an existing `timeseries` object into a new `timeseries` object based on specified start and end time values.
idealfilter	Apply an ideal pass or notch (noncausal) filter to a `timeseries` object.
resample	Select or interpolate data in a `timeseries` object using a new time vector.
setabstime	Set the time values in the time vector as date strings.
setinterpmethod	Set interpolation method for a `timeseries` object.
setuniformtime	Assign uniform time vector to `timeseries` object.
synchronize	Synchronize and resample two `timeseries` objects using a common time vector.

Event Methods

To construct an event object, use the constructor `tsdata.event`. For an example of defining events for a time-series object, see “Defining Events”.

`addevent`	Add one or more events to a `timeseries` object.
`delevent`	Delete one or more events from a `timeseries` object.
`gettsafteratevent`	Create a new `timeseries` object by extracting the samples from an existing time series that occur after or at a specified event.
`gettsafterevent`	Create a new `timeseries` object by extracting the samples that occur after a specified event from an existing time series.
`gettsatevent`	Create a new `timeseries` object by extracting the samples that occur at the same time as a specified event from an existing time series.

`gettsbeforeatevent`	Create a new `timeseries` object by extracting the samples that occur before or at a specified event from an existing time series.
`gettsbeforeevent`	Create a new `timeseries` object by extracting the samples that occur before a specified event from an existing time series.
`gettsbetweenevents`	Create a new `timeseries` object by extracting the samples that occur between two specified events from an existing time series.

Methods to Arithmetically Combine `timeseries` Objects

`+`	Addition of the corresponding data values of `timeseries` objects.
`-`	Subtraction of the corresponding data values of `timeseries` objects.
`.*`	Element-by-element multiplication of `timeseries` data.
`*`	Matrix-multiply `timeseries` data.
`./`	Right element-by-element division of `timeseries` data.
`/`	Right matrix division of `timeseries` data.
`.\`	Element-by-element left-array divide of `timeseries` data.
`\`	Left matrix division of `timeseries` data.

Methods to Calculate Descriptive Statistics for a `timeseries` Object

iqr	Return the interquartile range of `timeseries` data.
max	Return the maximum value of `timeseries` data.
mean	Return the mean of `timeseries` data.
median	Return the median of `timeseries` data.
min	Return the minimum of `timeseries` data.
std	Return the standard deviation of `timeseries` data.
sum	Return the sum of `timeseries` data.
var	Return the variance of `timeseries` data.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Create a `timeseries` object called `'LaunchData'` that contains four data sets, each stored as a column of length `5` and using the default time vector:

```
b = timeseries(rand(5, 4),'Name','LaunchData')
```

Create a `timeseries` object containing a single data set of length `5` and a time vector starting at `1` and ending at `5`:

```
b = timeseries(rand(5,1),[1 2 3 4 5])
```

Create a `timeseries` object called `'FinancialData'` containing five data points at a single time point:

```
b = timeseries(rand(1,5),1,'Name','FinancialData')
```

Definitions

timeseries

The time-series object, called `timeseries`, is a MATLAB variable that contains time-indexed data and properties in a single, coherent structure. For example, in addition to data and time values, you can also use the time-series object to store events, descriptive information about data and time, data quality, and the interpolation method.

Data Sample

A time-series *data sample* consists of one or more values recorded at a specific time. The number of data samples in a time series is the same as the length of the time vector.

For example, suppose that `ts.data` has the size 3-by-4-by-5 and the time vector has the length 5. Then, the number of samples is `5` and the total number of data values is `3 x 4 x 5 = 60`.

Time Vector

A time vector of a timeseries object can be either numerical (`double`) values or valid MATLAB date strings.

When the `timeseries` `TimeInfo.StartDate` property is empty, the numerical `time` values are measured relative to 0 (or another numerical value) in specified units. In this case, the time vector is described as *relative* (that is, it contains time values that are not associated with a specific start date).

When `TimeInfo.StartDate` is nonempty, the time values are date strings measured relative to `StartDate` in specified units. In this case, the time vector is described as *absolute* (that is, it contains time values that are associated with a specific calendar date).

MATLAB supports the following date-string formats for time-series applications.

Date-String Format	Usage Example
`dd-mmm-yyyy HH:MM:SS`	`01-Mar-2000 15:45:17`
`dd-mmm-yyyy`	`01-Mar-2000`
`mm/dd/yy`	`03/01/00`
`mm/dd`	`03/01`
`HH:MM:SS`	`15:45:17`
`HH:MM:SS PM`	`3:45:17 PM`
`HH:MM`	`15:45`
`HH:MM PM`	`3:45 PM`
`mmm.dd,yyyy HH:MM:SS`	`Mar.01,2000 15:45:17`
`mmm.dd,yyyy`	`Mar.01,2000`
`mm/dd/yyyy`	`03/01/2000`

See Also

`tscollection` | `tsdata.event`

Introduced before R2006a

addsample

Class: timeseries

Add data sample to `timeseries` object

Syntax

```
ts1 = addsample(ts, s)
ts1 = addsample(ts, 'Data', data-value, 'Time',time-value,...,
Name,Value)
```

Description

`ts1 = addsample(ts, s)` adds one or more new data samples stored in a structure `s` to the `timeseries` object `ts`.

`ts1 = addsample(ts, 'Data', data-value, 'Time',time-value,..., Name,Value)` adds one or more data samples to the `timeseries` object `ts` along with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

s

A structure that you must define before passing as an argument to `addsample`. It consists of the following optional fields:

- `s.data`
- `s.time`
- `s.quality`
- `s.overwriteflag`

data-value

A numeric data value.

`time-value`

A valid time vector.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'Quality'`

Array of data quality codes.

Default: `[ ]`

`'OverwriteFlag'`

Logical value that controls whether to overwrite a data sample at the same time with the new sample you are adding to your `timeseries` object. When set to `true`, the new sample overwrites the old sample at the same time.

Default: `false`

Output Arguments

`ts1`

The `timeseries` object that results when you add the specified samples to the original `timeseries` object.

Examples

Add a data value of `420` at time `3`:

```
ts = ts.addsample('Time',3,'Data',420);
```

Add a data value of `420` at time `3` and specify quality code `1` for this data value. Set the `OverwriteFlag` to overwrite an existing value at time `3`.

```
ts = ts.addsample('Data',3.2,'Quality',1,'OverwriteFlag',...
        true,'Time',3);
```

Definitions

data sample

One or more values recorded at a specific time. The number of data samples in a time series is the same as the length of the time vector.

Tips

- If N is the number of data samples, you can get the sample size of each time with `SampleSize = getsamplesize(ts)`.

  When `ts.IsTimeFirst` is `true`, the size of the data is N-by-`SampleSize`. When `ts.IsTimeFirst` is `false`, the size of the data is `SampleSize`-by-N.

See Also

timeseries | delsample | getdatasamples

Introduced before R2006a

append

Class: timeseries

Concatenate time series objects in time dimension

Syntax

```
ts = append(ts1,ts2, ... tsn)
```

Description

`ts = append(ts1,ts2, ... tsn)` creates a new `timeseries` object by concatenating `timeseries` `ts1`, `ts2`, and so on, along the time dimension.

Input Arguments

ts1

The first `timeseries` object that you want to append.

ts2

The second `timeseries` object that you want to append.

tsn

The nth `timeseries` object that you want to append.

Output Arguments

ts

The `timeseries` object that results from appending the input `timeseries` objects.

Examples

After creating `timeseries` objects, `ts1` and `ts2`, append them:

```
ts1 = timeseries(rand(5,1),[1 2 3 4 5]);
ts2 = timeseries(rand(5,1),[6 7 8 9 10]);
ts3 = append(ts1, ts2)
```

Tips

- A single overlapping time between each input time series is valid, as long as the overlapping samples are identical.
- The time vectors must not overlap by a nonzero amount. That is, the last time in `ts1` must be earlier than or equal to the first time in `ts2`.
- The sample size of the time series must be the same.

See Also

timeseries

delsample

Class: timeseries

Remove sample from `timeseries` object

Syntax

```
ts1 = delsample(ts,Name,Value)
```

Description

`ts1 = delsample(ts,Name,Value)` deletes samples from the `timeseries` object `ts` based on the specified `Name,Value` pair arguments.

Input Arguments

`ts`

A `timeseries` object.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'Index'`

The indices of the time vector that correspond to the samples you want to delete.

`'Value'`

The time values that correspond to the samples you want to delete.

Output Arguments

ts1

The `timeseries` object that results from removing the specified samples.

Examples

Create a `timeseries` object, and then remove samples:

```
ts = timeseries(rand(5,1),[10 20 30 40 50]);

% Remove data sample at time index 1

ts1 = delsample(ts,'Index', 1)

% Remove data sample at time value 20:

ts2 = delsample(ts,'Value', [20])
```

See Also

set | timeseries

Topics

Introduced before R2006a

detrend

Class: timeseries

Subtract mean or best-fit line and all `NaN`s from `timeseries` object

Syntax

```
ts1 = detrend(ts, method)
ts1 = detrend(ts, method, index)
```

Description

`ts1 = detrend(ts, method)` subtracts either a mean or a best-fit line from time-series data, using the specified `method`. Usually for FFT processing.

`ts1 = detrend(ts, method, index)` uses the optional `index` to specify the columns or rows to detrend.

Input Arguments

ts

The `timeseries` object from which you want to subtract the mean or best-fit line and all `NaN`s.

Default:

method

A string that specifies one of the following detrend methods:

- `'constant'` — Subtracts the mean.
- `'linear'` — Subtracts the best-fit line.

index

An integer array that specifies the columns or rows to detrend when `ts.IsTimeFirst` is true.

Output Arguments

`ts1`

The `timeseries` object resulting from detrending the input `timeseries` object.

Tips

- You cannot apply `detrend` to`timeseries` data with more than two dimensions.

See Also

timeseries

Topics

Introduced before R2006a

filter

Class: timeseries

Shape frequency content of time-series

Syntax

```
ts1 = filter(ts, numerator, denominator)
ts1=filter(ts, numerator, denominator, index)
```

Description

`ts1 = filter(ts, numerator, denominator)` applies the transfer function filter $b(z^{-1})/a(z^{-1})$ to the data in the `timeseries` object `ts`. `b` and `a` are the coefficient arrays of the transfer function numerator and denominator, respectively.

`ts1=filter(ts, numerator, denominator, index)` uses the optional `index` integer array to specify either the columns or rows to filter, depending on the value of `ts.IsTimeFirst`.

Input Arguments

ts

The first `timeseries` object for which you want to shape the frequency content.

numerator

The coefficient array of the transfer function numerator.

denominator

The coefficient array of the transfer function denominator.

index

An integer array that specifies the columns or rows to filter when `ts.IsTimeFirst` is true.

Output Arguments

ts1

The `timeseries` object that results from filtering the input `timeseries` object.

Examples

Apply Transfer Function to Time Series Data

This example applies the following transfer function to the data in `count.dat`:

$$H(z^{-1}) = \frac{b(z^{-1})}{a(z^{-1})} = \frac{2 + 3z^{-1}}{1 + 0.2z^{-1}}$$

Load the matrix `count` into the workspace:

```
load count.dat
```

Create a time-series object based on this matrix:

```
count1 = timeseries(count(:,1),[1:24]);
```

Enter the coefficients of the denominator ordered in ascending powers of z^{-1} to represent $1 + 0.2x$:

```
a = [1 0.2];
```

Enter the coefficients of the numerator to represent $2 - 3z^{-1}$:

```
b = [2 3];
```

Call the filter method:

```
filter_count = filter(count1, b, a);
```

Compare the original data and the shaped data with an overlaid plot of the two curves:

```
figure
plot(count1,'-.')
grid on
hold on
```

```
plot(filter_count,'-')
legend('Original Data','Shaped Data','Location','NorthWest')
```

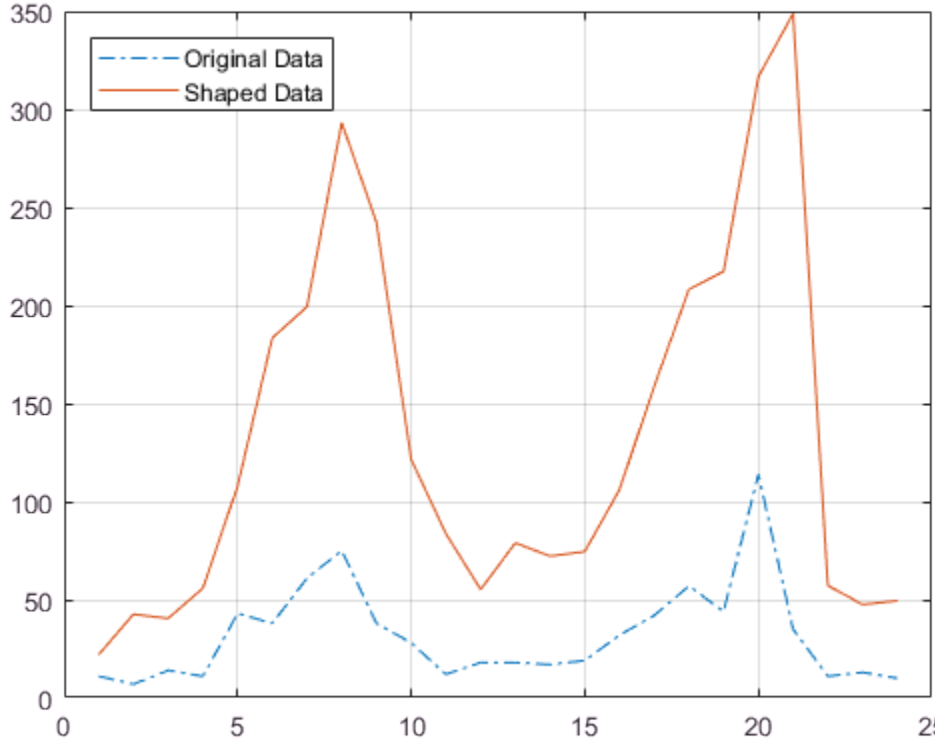

Tips

- The time-series data must be uniformly sampled to use this filter.
- The following function

  ```
  y = filter(b,a,x)
  ```

  creates filtered data `y` by processing the data in vector `x` with the filter described by vectors `a` and `b`.

- The `filter` function is a general tapped delay-line filter, described by the difference equation:
  $a(1)y(n) = b(1)x(n) + b(2)x(n - 1) + ... + b(nb)x(n - nb + 1) - a(2)y(n - 1) - ... - a(N_a)y(n - N_b + 1)$.

  Here, n is the index of the current sample, N_a is the order of the polynomial described by vector `a`, and N_b is the order of the polynomial described by vector `b`. The output $y(n)$ is a linear combination of current and previous inputs, $x(n)$ $x(n - 1)$..., and previous outputs, $y(n - 1)$ $y(n - 2)$... .
- You use the discrete filter to shape the data by applying a transfer function to the input signal.

  Depending on your objectives, the transfer function you choose might alter both the amplitude and the phase of the variations in the data at different frequencies to produce either a smoother or a rougher output.
- In digital signal processing (DSP), it is customary to write transfer functions as rational expressions in z^{-1} and to order the numerator and denominator terms in ascending powers of z^{-1}.

  Taking the z-transform of the difference equation
  $a(1)y(n) = b(1)x(n) + b(2)x(n - 1) + ... + b(nb)x(n - nb + 1) - a(2)y(n - 1) - ... - a(na)y(na + 1)$,

  results in the transfer function

$$Y(z) = H(z^{-1})X(z) = \frac{b(1) + b(2)z^{-1} + \ldots + b(nb)z^{-nb+1}}{a(1) + a(2)z^{-1} + \ldots + a(na)z^{-na+1}} X(z),$$

  where $Y(z)$ is the z-transform of the filtered output $y(n)$. The coefficients b and a are unchanged by the z-transform.

See Also

timeseries | idealfilter

Introduced before R2006a

get

Class: timeseries

Query `timeseries` object property values

Syntax

```
get(ts)
value = get(ts, PropertyName)
```

Description

`get(ts)` displays all properties and values of the `timeseries` object, `ts`.

`value = get(ts, PropertyName)` returns the property value for the specified `timeseries` object. The following syntax is equivalent:

```
value = ts.PropertyName
```

Input Arguments

`ts`

A `timeseries` object.

`PropertyName`

String specifying the name of a `timeseries` property. For a list of `timeseries` properties, see timeseries.

Output Arguments

`value`

String containing the value associated with the specified property.

Examples

Create a `timeseries` object, and then get the name. This example gets the name three different ways:

```
ts1 = timeseries(rand(5,1),[1 2 3 4 5], 'Name', 'MyTimeseries');
get(ts1)
get(ts1, 'Name')
value = ts1.Name
```

See Also

timeseries | set

Introduced before R2006a

getabstime

Class: timeseries

Extract date-string time vector into cell array

Syntax

```
getabstime(ts)
```

Description

`getabstime(ts)` extracts the time vector from the `timeseries` object `ts` as a cell array of date strings.

Input Arguments

ts

The `timeseries` object from which you want to extract the time vector.

Default:

Examples

The following example extracts a time vector as a cell array of date strings from a `timeseries` object.

First, create a `timeseries` object.

```
ts = timeseries([3 6 8 0 10]);
```

The default time vector for `ts` is `[0 1 2 3 4]`, which starts at 0 and increases in 1-second increments. The length of the time vector is equal to the length of the data.

Next, set the `StartDate` property.

```
ts.TimeInfo.StartDate = '10/27/2005 07:05:36';
```

Extract the time vector.

```
getabstime(ts)
```

MATLAB returns:

```
'27-Oct-2005 07:05:36'
'27-Oct-2005 07:05:37'
'27-Oct-2005 07:05:38'
'27-Oct-2005 07:05:39'
'27-Oct-2005 07:05:40'
```

Change the date-string format of the time vector, and then extract the time vector with the new date-string format:

```
ts.TimeInfo.Format = 'mm/dd/yy';
getabstime(ts)
```

MATLAB returns:

```
'10/27/05'
'10/27/05'
'10/27/05'
'10/27/05'
'10/27/05'
```

Tips

- To define the time vector relative to a calendar date, set the `TimeInfo.StartDate` property of the `timeseries` object. When the `TimeInfo.StartDate` format is a valid `datestr` format, the output strings from `getabstime` have the same format.

See Also

timeseries | setabstime | `datestr`

Introduced before R2006a

getdatasamples

Class: timeseries

Returns subset of time series samples using subscripted index array

Syntax

```
datasamples = getdatasamples(ts, i)
```

Description

`datasamples = getdatasamples(ts, i)` returns an array corresponding to the samples indicated by the array, `i`.

Input Arguments

ts

The `timeseries` object from which you want to exact samples.

i

An array of linear indices or logical values that specifies the time value or values for which you want to extract the corresponding samples.

Output Arguments

datasamples

The array that results from extracting the samples corresponding to the time value or values, `ts.time(i)`.

Examples

After creating a `timeseries` object, `ts`, extract the second and third data samples into an array:

```
ts = timeseries(rand(5,1),[1 2 3 4 5]);
samples = getdatasamples(ts, [2 3])
```

See Also

timeseries | getsamples | resample

Topics

getdatasamplesize

Class: timeseries

Size of data sample in `timeseries` object

Syntax

```
getdatasamplesize(ts)
```

Description

`getdatasamplesize(ts)` returns the size of each data sample in a `timeseries` object.

Input Arguments

ts

String specifying the name of a `timeseries` object.

Examples

After loading data and creating a `timeseries` object, get the size of a data sample:

```
% Load a 24-by-3 data array:
load count.dat

% Create a timeseries object with 24 time values:
count_ts = timeseries(count,[1:24],'Name','VehicleCount')

% Get the size of the data sample for this timeseries object:
getdatasamplesize(count_ts)
```

MATLAB returns the following, which indicates that the size of each data sample in `count_ts` is 1-by-3. In other words, MATLAB stores each data sample as a row with three values.

```
ans =

     1     3
```

Definitions

data sample

One or more scalar values recorded at a specific time. The number of data samples is the same as the length of the time vector.

See Also

timeseries | set

Introduced before R2006a

getinterpmethod

Class: timeseries

Interpolation method for `timeseries` object

Syntax

```
getinterpmethod(ts)
```

Description

`getinterpmethod(ts)` returns the interpolation method that the `timeseries` object `ts`, uses as a string.

Input Arguments

ts

The `timeseries` object from which you want to extract the interpolation method.

Examples

Create a `timeseries` object, and then get its interpolation method:

```
ts = timeseries(rand(5));
getinterpmethod(ts)
```

MATLAB returns:

```
linear
```

Definitions

interpolation method

Predefined interpolation methods are zero-order hold, `zoh`, and linear interpolation, `linear`. Linear interpolation is the default.

See Also

timeseries | setinterpmethod

Introduced before R2006a

getqualitydesc

Class: timeseries

Data quality descriptions

Syntax

```
getqualitydesc(ts)
```

Description

`getqualitydesc(ts)` returns a cell array of data quality descriptions based on the `Quality` values you assigned to a `timeseries` object, `ts`.

Input Arguments

ts

A `timeseries` object.

Examples

Create a `timeseries` object, and then get the data quality description strings for `ts`:

```
% Create a timeseries object, ts, with Data, Time, and Quality
% values, respectively:

ts = timeseries([3; 4.2; 5; 6.1; 8], 1:5, [1; 0; 1; 0; 1]);

% Set the QualityInfo property, including Code and Description:

ts.QualityInfo.Code = [0 1];
ts.QualityInfo.Description = {'good' 'bad'};

% Get the data quality description strings for ts:
```

```
getqualitydesc(ts)
```

MATLAB returns:

```
ans =

    'bad'
    'good'
    'bad'
    'good'
    'bad'
```

See Also

timeseries

Introduced before R2006a

getsamples

Class: timeseries

Subset of time series samples using subscripted index array

Syntax

```
ts1 = getsamples(ts, i)
```

Description

`ts1 = getsamples(ts, i)` returns a new `timeseries` object by extracting samples from `timeseries` `ts` corresponding to the time or times indicated by the subscripted index array, `i`.

Input Arguments

ts

The `timeseries` object from which you want to extract samples.

i

An index array corresponding to the times to extract.

Output Arguments

ts1

The `timeseries` object that results from extracting the samples corresponding to the time value or values `ts.time(i)` .

Examples

After creating a `timeseries` object, `ts`, extract the data samples at times 2 and 3 into a new `timeseries` object, `ts1`:

```
ts = timeseries(rand(5,1),[1 2 3 4 5]);
ts1 = getsamples(ts, ts.time([2 3]))
```

See Also

timeseries | getdatasamples | resample

getsampleusingtime

Class: timeseries

Extract data samples into new `timeseries` object

Syntax

```
ts1 = getsampleusingtime(ts,time)
ts1 = getsampleusingtime(ts,time,'AllowDuplicateTimes',true)
ts1 = getsampleusingtime(ts,starttime,endtime)
```

Description

`ts1 = getsampleusingtime(ts,time)` returns a new `timeseries` object, `ts1`, with a single sample corresponding to specified `time` in `ts.`

`ts1 = getsampleusingtime(ts,time,'AllowDuplicateTimes',true)` returns a new `timeseries` object, `ts1`, with multiple samples when the specified `time` occurs more than once in `ts`.

`ts1 = getsampleusingtime(ts,starttime,endtime)` returns a new `timeseries` object, `ts1`, with samples between the times `starttime` and `endtime` in `ts`.

Input Arguments

ts

The `timeseries` object from which you want to extract data samples.

time

The time corresponding to data sample you want to extract.

starttime

The time corresponding to the first data sample you want to extract.

endtime

The time corresponding to the last data sample you want to extract.

Output Arguments

ts1

A `timeseries` object that contains the subset of data samples from the original `timeseries` object.

Tips

- If the time vector in `ts` is not relative to a calendar date, then `starttime` and `endtime` must be numeric.
- If the time vector in `ts` is relative to a calendar date, then `starttime` and `endtime` values must be dates—either strings or `datenum` values.

See Also

timeseries

Introduced before R2006a

idealfilter

Class: timeseries

Apply ideal (noncausal) filter to `timeseries` object

Syntax

```
ts1 = idealfilter(ts, interval, filtertype)
ts1 = idealfilter(ts, interval, filtertype, index)
```

Description

`ts1 = idealfilter(ts, interval, filtertype)` applies an ideal filter of `filtertype` to one or more frequency intervals that `interval` specifies for the `timeseries` object, `ts`.

`ts1 = idealfilter(ts, interval, filtertype, index)` applies an ideal filter and uses the optional `index` integer array to specify the columns or rows to filter.

Input Arguments

`ts`

The `timeseries` object to which you want to apply an ideal filter.

`interval`

The frequency interval (specified in cycles per time unit) at which you want the ideal filter applied. To specify several frequency intervals, use an n-by-2 array of start and end frequencies, where `n` represents the number of intervals.

`filtertype`

A string specifying the type of filter you want to apply, either `pass` or `notch`.

index

An integer array that specifies the columns or rows to filter when `ts.IsTimeFirst` is true.

Output Arguments

ts1

The `timeseries` object that results when you apply an ideal filter to the original `timeseries` object.

Examples

Apply Ideal Notch and Pass Filters

This example first applies an ideal notch filter to the data in `count.dat`. Then, it applies a pass filter to the data.

Load the count matrix into the workspace:

```
load count.dat
```

Create a timeseries object from column one of this matrix. Specify a time vector that ranges from 1 to 24 s in 1-s intervals.

```
count1 = timeseries(count(:,1),1:24);
```

Obtain the mean of the data:

```
countmean = mean(count1);
```

Enter the frequency interval, in hertz, for filtering the data:

```
interval = [0.08 0.2];
```

Invoke an ideal notch filter:

```
idealfilter_countn = idealfilter(count1,interval,'notch');
```

Compare the original data and the shaped data on a line plot:

```
plot(count1,'-.')
grid on
hold on
plot(idealfilter_countn,'-')
```

Restore the mean to the filtered data and show it on the line plot, adding a legend and a title:

```
countn_restored = idealfilter_countn + countmean;
plot(countn_restored,':')
title('Notch Filter')
legend('Original Data','Shaped Data','Mean Restored',...
       'Location','NorthWest')
```

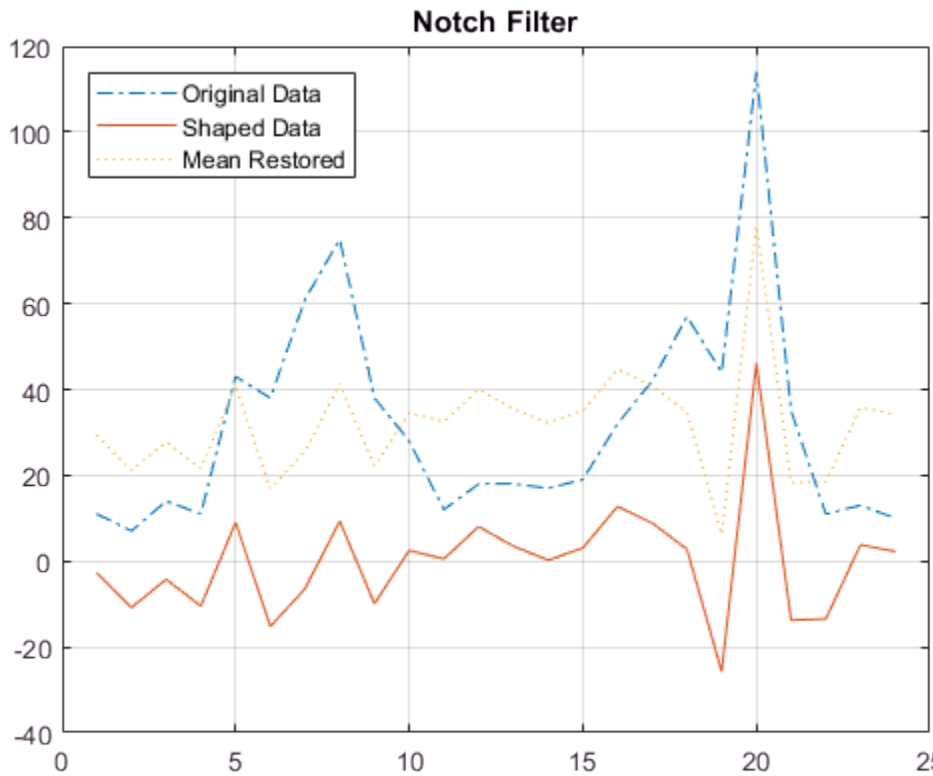

Close the Figure window:

```
close
```

Then, repeat the process using a `pass` rather than a `notch` filter:

```
figure

plot(count1,'-.')
grid on
hold on

idealfilter_countp = idealfilter(count1,interval,'pass');
plot(idealfilter_countp,'-')

countp_restored = idealfilter_countp + countmean;
plot(countp_restored,':')

title('Pass Filter')
legend('Original Data','Shaped Data','Mean Restored',...
       'Location','NorthWest')
```

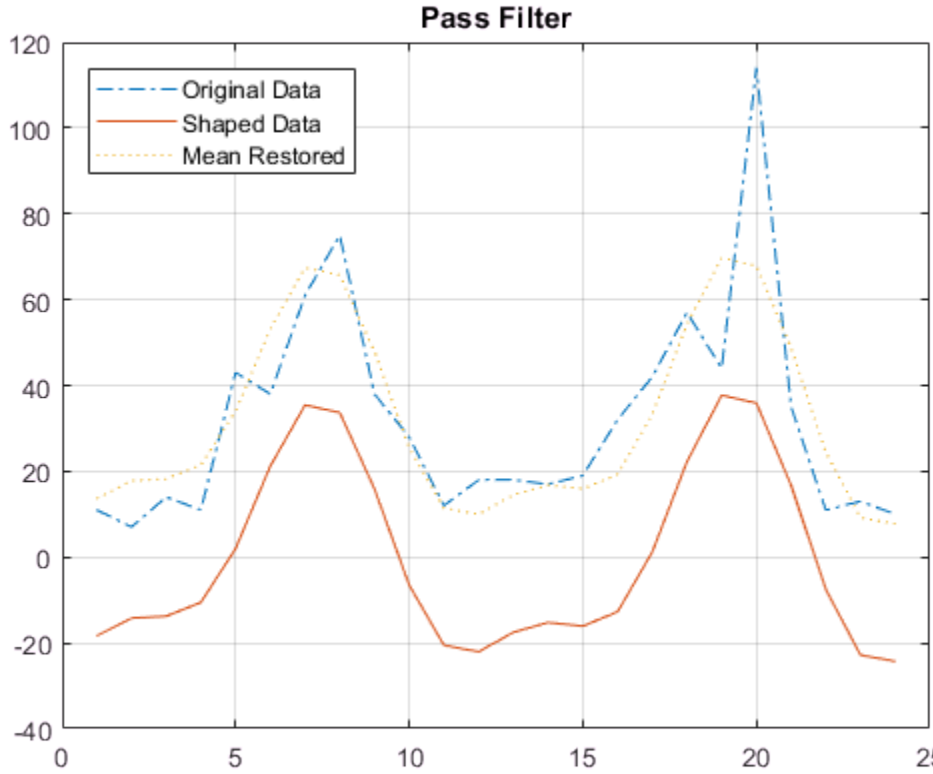

Definitions

ideal filter

Filters are *ideal* in the sense that they are *not realizable*. An ideal filter is noncausal and the ends of the filter amplitude are perfectly flat in the frequency domain.

Tips

- Ideal filters require data to have a mean of zero and prepare the data by subtracting its mean. You can restore the filtered signal amplitude by adding the mean of the input data to the filter output values.
- Use the ideal *notch* filter when you want to remove variations in a specific frequency range. Alternatively, use the ideal *pass* filter to allow only the variations in a specific frequency range.
- If the time-series data is sampled nonuniformly, filtering resamples this data on a uniform time vector.
- All `NaN`s in the time series are interpolated before filtering, using the interpolation method you assigned to the `timeseries` object.

See Also

timeseries | filter

Introduced before R2006a

iqr

Class: timeseries

Interquartile range of `timeseries` data

Syntax

```
ts_iqr = iqr(ts)
iqr(ts, Name, Value)
```

Description

`ts_iqr = iqr(ts)` returns the interquartile range of `ts.Data`.

`iqr(ts, Name, Value)` reruns the interquatrile range of `ts.Data` with the specified Name, Value pairs.

Input Arguments

`ts`

The `timeseries` object for which you want the interquartile range of `timeseries` data.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'MissingData'`

A string specifying one of two possible values, `remove` or `interpolate`, indicating how to treat missing data during the calculation.

Default: `remove`

'Quality'

A vector of integers, indicating which quality codes represent missing samples (for vector data) or missing observations (for data arrays with two or more dimensions).

Output Arguments

ts_iqr

The interquartile range of `ts.Data`, as follows:

- When `ts.Data` is a vector, `ts_iqr` is the difference between the 75th and the 25th percentiles of the `ts.Data` values.
- When `ts.Data` is a matrix, and `IsTimeFirst` is `true`, and the first dimension of `ts` is aligned with time, then `ts_iqr` is a row vector containing the interquartile range of each column of `ts.Data`.

When `ts.Data` is an N-dimensional array, `iqr` always operates along the first nonsingleton dimension of `ts.Data`.

Examples

Create a time series with a missing value, represented by `NaN`, and then calculate the interquartile range of `ts.Data` after removing the missing value from the calculation:

```
ts = timeseries([3.0 NaN 5 6.1 8], 1:5);
iqr(ts,'MissingData','remove')
```

MATLAB returns:

```
    3.0500
```

See Also

mean | min | sum | timeseries | max | median | std | var

Introduced before R2006a

max

Class: timeseries

Maximum value of `timeseries` data

Syntax

```
ts_max = max(ts)
ts_max = max(ts,Name,Value)
```

Description

`ts_max = max(ts)` returns the maximum value in the `timeseries` data.

`ts_max = max(ts,Name,Value)` returns the maximum value in the `timeseries` data with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`ts`

The `timeseries` object for which you want to determine the maximum data value.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'MissingData'`

A string specifying one of two possible values, `remove` or `interpolate`, indicating how to treat missing data during the calculation.

Default: `remove`

`'Quality'`

A vector of integers, indicating which quality codes represent missing samples (for vector data) or missing observations (for data arrays with two or more dimensions).

Output Arguments

`ts_max`

The maximum data value in the specified `timeseries` object, as follows:

- When `ts.Data` is a vector, `ts_max` is the maximum value of `ts.Data` values.
- When `ts.Data` is a matrix, `IsTimeFirst` is `true`, and the first dimension of `ts` is aligned with time, then `ts_max` is a row vector containing the maximum value of each column of `ts.Data`.

When `ts.Data` is an N-dimensional array, `max` always operates along the first nonsingleton dimension of `ts.Data`.

Examples

The following example illustrates how to find the maximum values in multivariate time-series data:

```
% Load a 24-by-3 data array:
load count.dat

% Create a timeseries object with 24 time values:
count_ts = timeseries(count,[1:24],'Name','CountPerSecond')

% Find the maximum in each data column for this timeseries object:

max(count_ts)
```

MATLAB returns:

```
114    145    257
```

See Also

mean | min | sum | timeseries | iqr | median | std | var

Introduced before R2006a

mean

Class: timeseries

Mean value of `timeseries` data

Syntax

```
ts_mn = mean(ts)
ts_mn = mean(ts,Name,Value)
```

Description

`ts_mn = mean(ts)` returns the mean value of `ts.Data`.

`ts_mn = mean(ts,Name,Value)` returns the mean value of `ts.Data` with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`ts`

The `timeseries` object for which you want the mean value of data.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'MissingData'`

A string specifying one of two possible values, `remove` or `interpolate`, indicating how to treat missing data during the calculation.

Default: `remove`

`'Quality'`

A vector of integers, indicating which quality codes represent missing samples (for vector data) or missing observations (for data arrays with two or more dimensions).

`'Weighting'`

A string specifying one of two possible values, `none` or `time`.
When you specify `time`, larger time values correspond to larger weights.

Output Arguments

`ts_mn`

The mean value of `ts.Data`, as follows:

- When `ts.Data` is a vector, `ts_mn` is the mean value of `ts.Data` values.
- When `ts.Data` is a matrix, and `IsTimeFirst` is `true` and the first dimension of `ts` is aligned with time, then `ts_mn` is a row vector containing the mean value of each column of `ts.Data`.

When `ts.Data` is an N-dimensional array, `mean` always operates along the first nonsingleton dimension of `ts.Data`.

Examples

Find the mean values in multivariate time-series data:

```
% Load a 24-by-3 data array:

load count.dat

%  Create a timeseries object with 24 time values:

count_ts = timeseries(count,[1:24],'Name','CountPerSecond')

% Find the mean of each data column for this timeseries object:
```

```
mean(count_ts)
```

MATLAB returns:

```
32.0000   46.5417   65.5833
```

Algorithms

MATLAB determines weighting by:

1. Attaching a weighting to each time value, depending on its order, as follows:
   - First time point — The duration of the first time interval `(t(2) - t(1))`.
   - Time point that is neither the first nor last time point — The duration between the midpoint of the previous time interval to the midpoint of the subsequent time interval `((t(k + 1) - t(k))/2 + (t(k) - t(k - 1))/2)`.
   - Last time point — The duration of the last time interval `(t(end) - t(end - 1))`.
2. Normalizing the weighting for each time by dividing each weighting by the mean of all weightings.

   Note: If the `timeseries` object is uniformly sampled, then the normalized weighting for each time is 1.0. Therefore, time weighting has no effect.
3. Multiplying the data for each time by its normalized weighting.

See Also

timeseries | timeseries.max | timeseries.min | timeseries.sum | timeseries.iqr | timeseries.median | timeseries.std | timeseries.var

Introduced before R2006a

median

Class: timeseries

Median value of `timeseries` data

Syntax

```
ts_med = median(ts)
ts_med = method(ts,Name,Value)
```

Description

`ts_med = median(ts)` returns the median value of `ts.Data`.

`ts_med = method(ts,Name,Value)` returns the median value of `ts.Data` with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`ts`

The `timeseries` object for which you want the median data value.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'MissingData'`

A string specifying one of two possible values, `remove` or `interpolate`, indicating how to treat missing data during the calculation.

Default: `remove`

'Quality'

A vector of integers, indicating which quality codes represent missing samples (for vector data) or missing observations (for data arrays with two or more dimensions).

'Weighting'

A string specifying one of two possible values, `none` or `time`.
When you specify `time`, larger time values correspond to larger weights.

Output Arguments

ts_med

The median value of `ts.Data`, as follows:

- When `ts.Data` is a vector, `ts_med` is the mean value of `ts.Data` values.
- When `ts.Data` is a matrix, and `IsTimeFirst` is `true`, and the first dimension of `ts` is aligned with time, then `ts_med` is a row vector containing the median value of each column of `ts.Data`.

When `ts.Data` is an N-dimensional array, `median` always operates along the first nonsingleton dimension of `ts.Data`.

Examples

The following example finds the median values in multivariate time-series data. MATLAB finds the median independently for each data column in the `timeseries` object:

```
% Load a 24-by-3 data array:

load count.dat

% Create a timeseries object with 24 time values:

count_ts = timeseries(count,[1:24],'Name','CountPerSecond');

% Find the median of each data column for this timeseries object:
```

```
median(count_ts)
```

MATLAB returns:

```
23.5000   36.0000   39.0000
```

Algorithms

MATLAB determines weighting by:

1. Attaching a weighting to each time value, depending on its order, as follows:
   - First time point — The duration of the first time interval `(t(2) - t(1))`.
   - Time point that is neither the first nor last time point — The duration between the midpoint of the previous time interval to the midpoint of the subsequent time interval `((t(k + 1) - t(k))/2 + (t(k) - t(k - 1))/2)`.
   - Last time point — The duration of the last time interval `(t(end) - t(end - 1))`.
2. Normalizing the weighting for each time by dividing each weighting by the mean of all weightings.

   Note: If the `timeseries` object is uniformly sampled, then the normalized weighting for each time is 1.0. Therefore, time weighting has no effect.
3. Multiplying the data for each time by its normalized weighting.

See Also

iqr | mean | std | var | max | min | sum | timeseries

Introduced before R2006a

min

Class: timeseries

Minimum value of `timeseries` data

Syntax

```
ts_min = min(ts)
ts_min = method(ts,Name,Value)
```

Description

`ts_min = min(ts)` returns the minimum value in the `timeseries` data.

`ts_min = method(ts,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`ts`

The `timeseries` object for which you want the minimum data value.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'MissingData'`

A string specifying one of two possible values, `remove` or `interpolate`, indicating how to treat missing data during the calculation.

Default: `remove`

'Quality'

A vector of integers, indicating which quality codes represent missing samples (for vector data) or missing observations (for data arrays with two or more dimensions).

Output Arguments

ts_min

The minimum value of `ts.Data`, as follows:

- When `ts.Data` is a vector, `ts_min` is the minimum value of `ts.Data` values.
- When `ts.Data` is a matrix, and `IsTimeFirst` is `true`, and the first dimension of `ts` is aligned with time, then `ts_min` is a row vector containing the minimum value of each column of `ts.Data`.

When `ts.Data` is an N-dimensional array, `min` always operates along the first nonsingleton dimension of `ts.Data`.

Examples

The following example finds the minimum values in multivariate time-series data. MATLAB finds the minimum independently for each data column in the `timeseries` object.

```
% Load a 24-by-3 data array:

load count.dat

% Create a timeseries object with 24 time values:

count_ts = timeseries(count,[1:24],'Name','CountPerSecond');

% Find the minimum in each data column for this timeseries object:

min(count_ts)
```

MATLAB returns:

```
7     9     7
```

See Also

max | median | sum | timeseries | iqr | mean | std | var

Introduced before R2006a

plot

Class: timeseries

Plot time series

Syntax

```
plot(ts)
plot(tsc.tsname)
plot(ts,linespec)
plot(tsc.tsname,linespec)
plot(ts,Name, Value)
plot(tsc.tsname,Name, Value)
```

Description

`plot(ts)` plots the `timeseries` data `ts` against time and interpolates values between samples by using either zero-order-hold (`'zoh'`) or linear interpolation (the default). The plot displays in the current axes. MATLAB creates a title and axes, if none exists.

`plot(tsc.tsname)` plots the `timeseries` object, `tsname` that is part of the `tscollection`, `tsc`.

`plot(ts,linespec)` plots the `timeseries` data using a line graph and applies the specified `linespec` to lines, markers, or both.

`plot(tsc.tsname,linespec)` plots the `timeseries` object that is part of a `timeseries` collection as a line graph and applies the specified `linespec` to lines, markers, or both.

`plot(ts,Name, Value)` plots a line graph of the time series data using the values specified for Chart Line Properties.

`plot(tsc.tsname,Name, Value)` plots a line graph of the `timeseries` object that is part of the specified `timeseries` collection using the values specified for Chart Line Properties.

Input Arguments

ts

A `timeseries` object.

tsc

A `tscollection`.

tsname

The name of a `timeseries` object within the `tscollection` .

Examples

Plot Time Series Object with Specified Start Date

Create a time series object, set the start date, and then plot the time vector relative to the start date.

```
x = [2 5 8 2 11 3 6];
ts1 = timeseries(x,1:7);

ts1.Name = 'Daily Count';
ts1.TimeInfo.Units = 'days';
ts1.TimeInfo.StartDate = '01-Jan-2011';     % Set start date.
ts1.TimeInfo.Format = 'mmm dd, yy';       % Set format for display on x-axis.

ts1.Time = ts1.Time - ts1.Time(1);        % Express time relative to the start date.

plot(ts1)
```

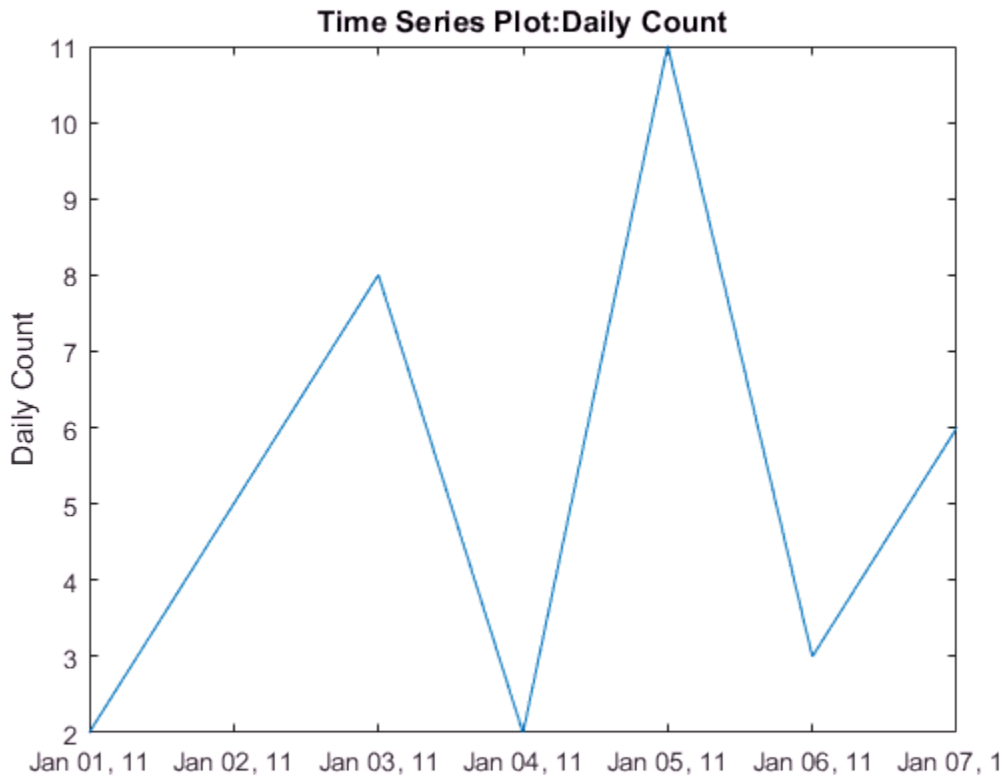

Plot Two Time Series Objects on the Same Axes

Create two time series objects from traffic count data, and then plot them in sequence on the same axes. Add an event to one series, which is automatically displayed with a red marker.

```
load count.dat;
count1 = timeseries(count(:,1),1:24);
count1.Name = 'Oak St. Traffic Count';
count1.TimeInfo.Units = 'hours';
plot(count1,':b')
grid on
```

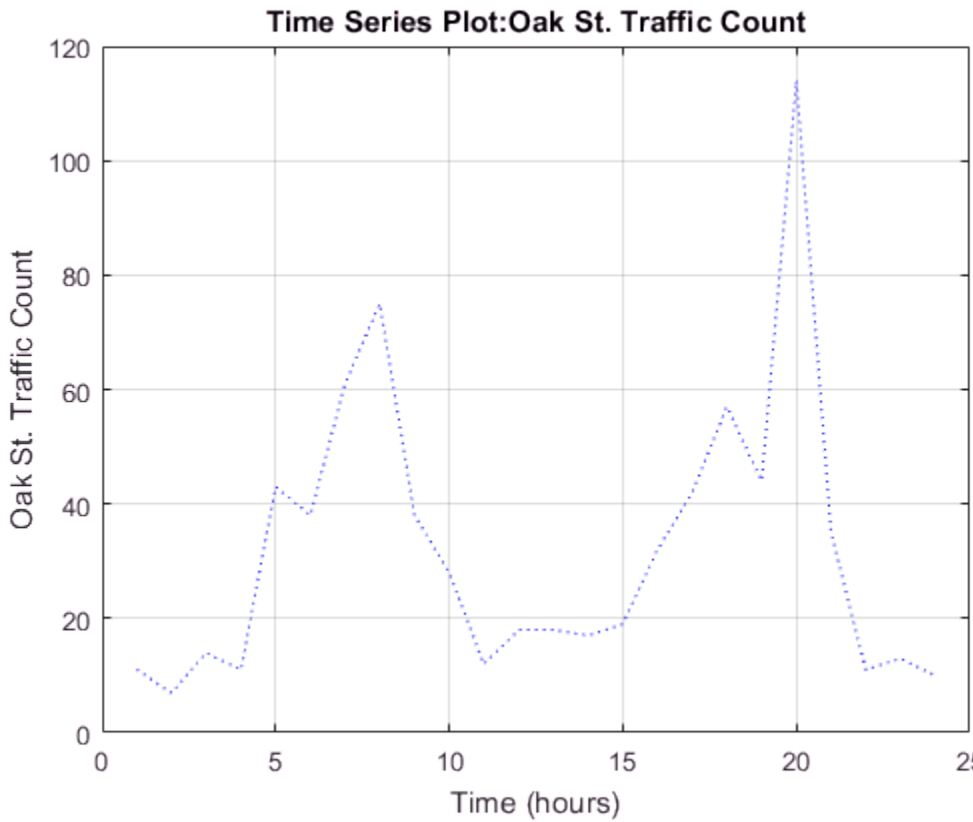

Obtain time of maximum value and add it as an event:

```
[~,index] = max(count1.Data);
max_event = tsdata.event('peak',count1.Time(index));
max_event.Units = 'hours';
```

Add the event to the time series:

```
count1 = addevent(count1,max_event);
```

Replace plot with new one showing the event:

```
plot(count1,'.-b')
grid on
```

Make a new time series object from column 2 of the same data source:

```
count2 = timeseries(count(:,2),1:24);
count2.Name = 'Maple St. Traffic Count';
count2.TimeInfo.Units = 'Hours';
```

Turn hold on to add the new data to the plot:

```
hold on
```

The plot method does not add labels to a held plot. Use property/value pairs to customize markers:

```
plot(count2,'s-m','MarkerSize',6),
```

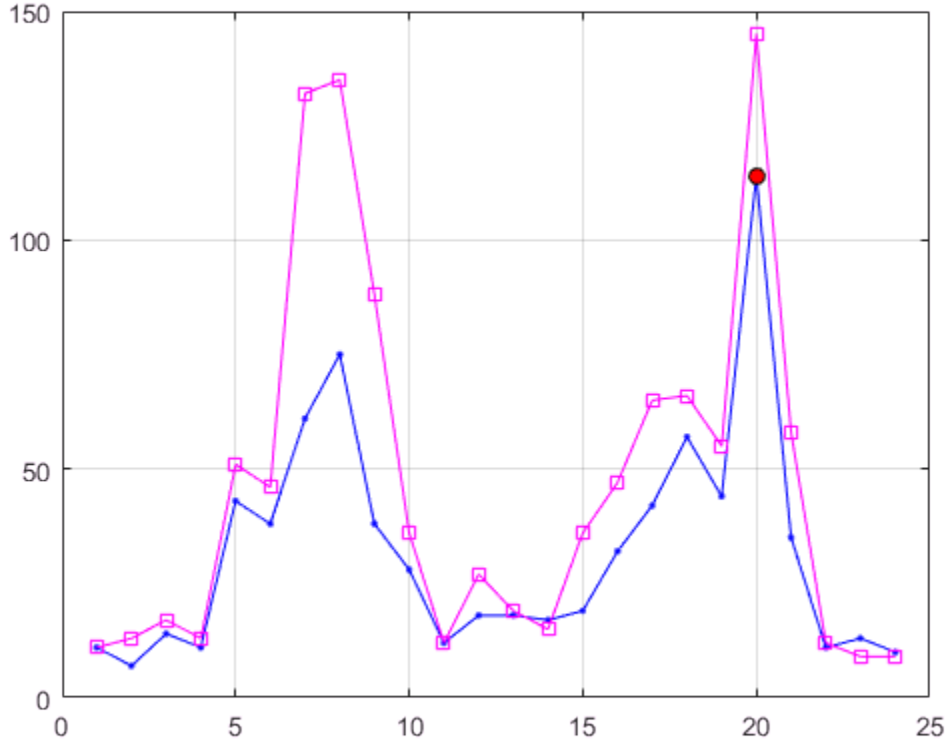

Labels are erased, so generate them manually:

```
title('Time Series: Oak Street and Maple Street')
xlabel('Hour of day')
ylabel('Vehicle count')
```

Add a legend in the upper left:

```
legend('Oak St.','Maple St.','Location','northwest')
```

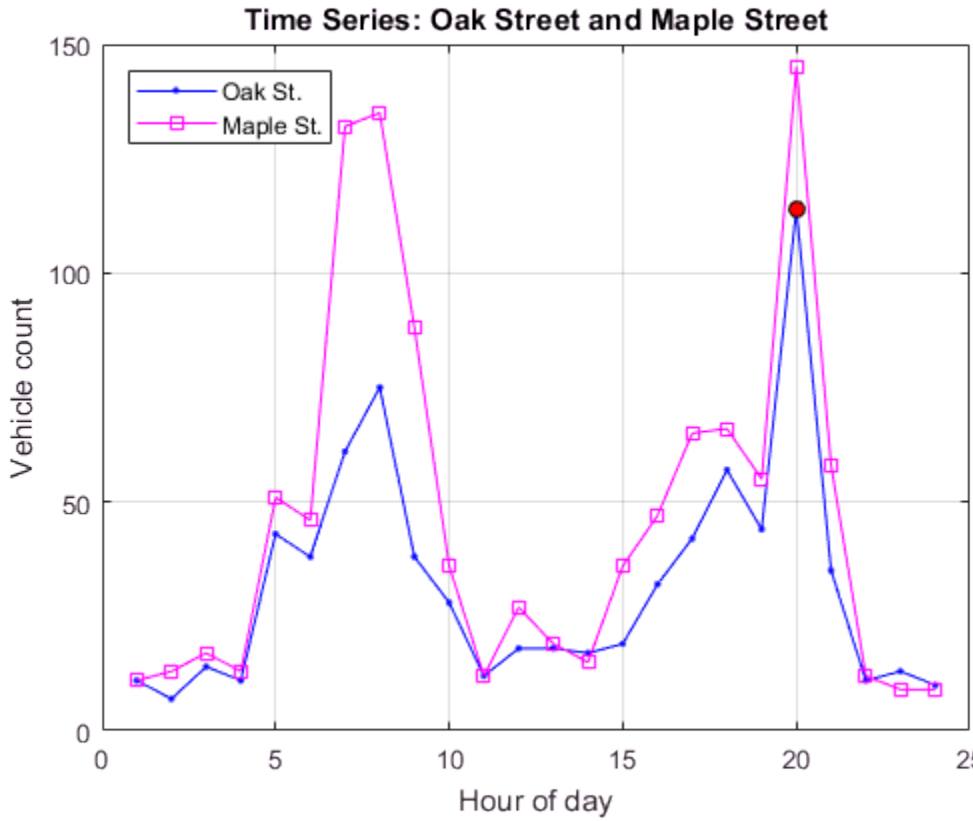

Tips

- The `timeseries/plot` method generates titles and axis labels automatically. These labels are:
  - Plot Title — `'Time Series Plot: <name>'`

    where `<name>` is the string assigned to `ts.Name`, or by default, `'unnamed'`
  - X-Axis Label — `'Time (<units>)'`

where `<units>` is the value of the `ts.TimeInfo.Units` field, which defaults to `'seconds'`

- Y-Axis Label — `'<name>'`

  where `<name>` is the string assigned to `ts.Name`, or by default, `'unnamed'`

- You can place new time series data on a time series plot (by setting `hold on`, for example, and issuing another `timeseries/plot` command). When you add data to a plot, the title and axis labels become blank strings to avoid labeling confusion. You can add your own labels after plotting using the `title`, `xlabel`, and `ylabel` commands.
- Time series events, when defined, are marked in the plot with a circular marker with red fill. You can also specify markers for all data points using a `linespec` or name/value syntax in addition to any event markers your data defines. The event markers plot on top of the markers you define.
- The value assigned to `ts.DataInfo.Interpolation.Name` controls the type of interpolation the `plot` method uses when plotting and resampling time series data. Invoke the `timeseries` method `setinterpmethod` to change default linear interpolation to zero-order hold interpolation (staircase). This method creates a new `timeseries` object, with which you can overwrite the original one if you want. For example, to cause time series `ts` to use zero-order hold interpolation, type the following:

  ```
  ts = ts.setinterpmethod('zoh');
  ```

See Also

timeseries | setinterpmethod | `tscollection` | `tsdata.event` | `plot`

Introduced before R2006a

resample

Class: timeseries

Select or interpolate `timeseries` data using new time vector

Syntax

```
ts1 = resample(ts, time)
ts1 = resample(ts, time, interp_method)
ts1 = resample(ts, time, interp_method, code)
```

Description

`ts1 = resample(ts, time)` resamples the `timeseries` object, `ts`, using the new `time` vector. The `resample` method uses the default interpolation method, which you can view by using the `getinterpmethod(ts)` syntax.

`ts1 = resample(ts, time, interp_method)` resamples the `timeseries` object `ts` using the specified interpolation method, `interp_method`.

`ts1 = resample(ts, time, interp_method, code)` resamples the `timeseries` object `ts` using the interpolation method given by the string `interp_method`. MATLAB applies the `code` to all samples.

Input Arguments

ts

The `timeseries` object that you want to resample.

time

The time vector you want to use to resample the `timeseries` object.

When `ts` uses date strings and `time` is numeric, then `time` is treated as specified relative to the `ts.TimeInfo.StartDate` property and in the same units that `ts` uses.

interp_method

A string specifying the interpolation method. Valid interpolation methods are `linear` and zero-order hold, `zoh` .

Default: `linear`

code

An integer value that specifies the user-defined `Quality` code for resampling. MATLAB applies this `Quality` code to all samples.

Output Arguments

ts1

The `timeseries` object that results when you interpolate the original `timeseries` object with a new time vector.

Examples

This example shows how to resample a `timeseries` object.

Create a `timeseries` object.

```
ts1 = timeseries([1.1; 2.9; 3.7; 4.0; 3.0],1:5,'Name','speed');
```

View the time, data, and interpolation method.

```
ts1.time
ts1.data
ts1.getinterpmethod
```

Resample `ts1` using its default interpolation method.

```
res_ts=resample(ts1,[1 1.5 3.5 4.5 4.9]);
```

View the time, data, and interpolation method for the resampled object.

```
res_ts.time
res_ts.data
```

```
res_ts.getinterpmethod
```

See Also

timeseries | getinterpmethod | setinterpmethod | synchronize

Topics

Introduced before R2006a

set

Class: timeseries

Set properties of `timeseries` object

Syntax

```
set(ts, PropertyName, Value)
set(ts, PropertyName)
set(ts)
```

Description

`set(ts, PropertyName, Value)` sets the named property, `Name`, of the `timeseries` object, `ts`, to the value, `Value`. The following syntax is equivalent:

```
ts.Property = Value
```

`set(ts, PropertyName)` displays the value of the named property for the `timeseries` object, `ts`.

`set(ts)` displays all properties and values of the `timeseries` object `ts`.

Input Arguments

ts

A `timeseries` object.

PropertyName

A string specifying the name of a `timeseries` property. For a list of `timeseries` properties, see timeseries.

Value

The value to which you want to set the named property.

Examples

Create a `timeseries`, set its name to `mytimeseries`, and then view the `timeseries` properties:

```
ts1 = timeseries(rand(5,1),[1 2 3 4 5]);
set(ts1, 'Name', 'mytimeseries')
set(ts1)
```

See Also

timeseries | get

Introduced before R2006a

setabstime

Class: timeseries

Set times of `timeseries` object as date strings

Syntax

```
ts1=setabstime(ts, times)
ts1=setabstime(ts, times, format)
```

Description

`ts1=setabstime(ts, times)` sets the times in `ts` to the date strings specified in `times`.

`ts1=setabstime(ts, times, format)` explicitly specifies the date-string format, `format`, used in `times`.

Input Arguments

ts

The `timeseries` object for which you want to set times as date strings.

times

A cell array of strings or a `char` array containing valid date or time values in the same date format.

format

The date-string format used for the time values.

Output Arguments

ts1

The `timeseries` object that results from setting times as date strings on the original `timeseries` object.

Examples

Create a `timeseries` object, and then set the absolute time vector:

```
ts = timeseries(rand(3,1))
ts1 = setabstime(ts,{'12-DEC-2005 12:34:56',...
     '12-DEC-2005 13:34:56','12-DEC-2005 14:34:56'})

% View each timeseries object in the Variable Editor to see the
% differences in the time vectors for each.
```

See Also

`datestr` | getabstime | timeseries

Introduced before R2006a

setinterpmethod

Class: timeseries

Set default interpolation method for `timeseries` object

Syntax

```
ts = setinterpmethod(ts, method)
ts = setinterpmethod(ts, fhandle)
ts = setinterpmethod(ts, interpobj)
```

Description

`ts = setinterpmethod(ts, method)` sets the default interpolation method, `method`, for `timeseries` object, `ts`, and outputs it to `ts1`.

`ts = setinterpmethod(ts, fhandle)` sets the default interpolation method for `timeseries` object `ts`, where `fhandle` is a function handle to the interpolation method.

`ts = setinterpmethod(ts, interpobj)` sets the default interpolation method for `timeseries` object `ts`, where `interpobj` is a `tsdata.interpolation` object that directly replaces the interpolation object stored in `ts`.

Input Arguments

ts

The `timeseries` object for which you want to set the default interpolation method.

method

A string specifying the interpolation method. Valid values are `linear` and zero-order hold, `zoh`.

Default: `linear`

fhandle

A function handle to the interpolation method. The order of input arguments defining the function handle must be `new_time`, `time`, and `data`. The single output argument must be the interpolated data only.

interpobj

A `tsdata.interpolation` object that directly replaces the interpolation object stored in `ts`.

Output Arguments

ts1

The `timeseries` object that results when you set the interpolation method for the original `timeseries` object.

Examples

Set the default interpolation method for `timeseries` object `ts` to zero order hold:

```
ts = timeseries(rand(100,1),1:100);
ts = setinterpmethod(ts,'zoh');
plot(ts);
```

Set the default interpolation method for `timeseries` object `ts`, where `fhandle` is a function handle to the interpolation method defined by function handle `myFuncHandle`:

```
ts = timeseries(rand(100,1),1:100);
myFuncHandle = @(new_time, time, data)...
               interp1(time, data, new_time,...
                       'linear','extrap');
ts = setinterpmethod(ts, myFuncHandle);
ts = resample(ts, [-5:0.1:10]);
plot(ts);
```

Set the default interpolation method for `timeseries` object `ts` to a `tsdata.interpolation` object:

```
ts = timeseries(rand(100,1),1:100);
```

```
myFuncHandle = @(new_time, time, data)...
               interp1(time, data, new_time,...
                       'linear','extrap');
myInterpObj = tsdata.interpolation(myFuncHandle);
ts = setinterpmethod(ts,myInterpObj);
plot(ts);
```

Tips

- This method is case sensitive.

See Also

timeseries | getinterpmethod

Introduced before R2006a

setuniformtime

Class: timeseries

Modify uniform time vector of `timeseries` object

Syntax

```
ts2 = setuniformtime(ts1,'StartTime',StartTime)
ts2 = setuniformtime(ts1,'Interval',Interval)
ts2 = setuniformtime(ts1,'EndTime',EndTime)
ts2 = setuniformtime(ts1,'StartTime',StartTime,'Interval',Interval)
ts2 = setuniformtime(ts1,'StartTime',StartTime,'EndTime',EndTime)
ts2 = setuniformtime(ts1,'Interval',Interval,'EndTime',EndTime)
```

Description

`ts2 = setuniformtime(ts1,'StartTime',StartTime)` returns the time series with a modified uniform time vector, determined from the `StartTime` and `Interval` `1.` `EndTime = StartTime + (length(ts1) - 1)`. The unit of time is unchanged.

`ts2 = setuniformtime(ts1,'Interval',Interval)` sets the `StartTime` to `0`, and uses `EndTime = (length(ts1) - 1)*Interval`.

`ts2 = setuniformtime(ts1,'EndTime',EndTime)` sets the `StartTime` to `0`, and uses `Interval = EndTime/(length(ts1) -1)`.

`ts2 = setuniformtime(ts1,'StartTime',StartTime,'Interval',Interval)` uses `EndTime = StartTime + (length(ts1) - 1) * Interval`.

`ts2 = setuniformtime(ts1,'StartTime',StartTime,'EndTime',EndTime)`uses `Interval = (EndTime - StartTime)/(length(ts1) - 1)`.

`ts2 = setuniformtime(ts1,'Interval',Interval,'EndTime',EndTime)` uses `StartTime = EndTime - (length(ts1) - 1) * Interval`.

Input Arguments

ts1

`timeseries` object to which you want to assign a uniform time vector.

StartTime

Start time of uniform time vector, specified as a numeric value.

Interval

Time interval of uniform time vector, specified as a numeric scalar value.

EndTime

End time of uniform time vector specified as a numeric scalar value.

Output Arguments

ts2

Time series with uniform time vector, returned as a `timeseries` object.

Examples

Specify New Start Time

Modify the uniform time vector of time series data by specifying a new start time.

1. Load the sample data.

   ```
   load count.dat;
   ```

2. Create a `timeseries` object.

   ```
   count_ts = timeseries(count,1:length(count),'Name','CountPerSecond');
   ```

3. Modify uniform time vector of `count_ts`.

   ```
   count_ts = setuniformtime(count_ts,'StartTime',10);
   ```

The start time of the time vector is 10 seconds. `setuniformtime` uses a default time interval of 1 and computes the end time using: `EndTime = StartTime + (length(count_ts) - 1)* Interval`.

Specify New Start and End Times

Modify the uniform time vector of time series data by specifying a new start time and end time.

1. Load sample data.

   ```
   load count.dat;
   ```

2. Create `timeseries` object.

   ```
   count_ts = timeseries(count,1:length(count),'Name','CountPerSecond');
   ```

3. Assign a uniform time vector to `count_ts`.

   ```
   count_ts2 = setuniformtime(count_ts,'StartTime',10,'EndTime',20);
   ```

   The start time of the time vector is now 10 seconds, and the end time is now 20 seconds. MATLAB computes the time interval using: `Interval = (EndTime - StartTime)/(length(count_ts) - 1)`

See Also

timeseries

synchronize

Class: timeseries

Synchronize and resample two `timeseries` objects using common time vector

Syntax

```
[ts1 ts2] = synchronize(ts1,ts2,synchronizemethod)
[ts1 ts2] = synchronize( ___ ,Name,Value)
```

Description

`[ts1 ts2] = synchronize(ts1,ts2,synchronizemethod)` creates two new `timeseries` objects by synchronizing `ts1` and `ts2` using a common time vector and the specified method.

`[ts1 ts2] = synchronize( ___ ,Name,Value)` creates the two new `timeseries` objects with additional options specified by one or more `Name,Value` pair arguments for the previous syntax.

Input Arguments

ts1

One of the `timeseries` objects that you want to synchronize and resample.

ts2

The other `timeseries` object that you want to synchronize and resample.

synchronizemethod

A string that defines the method for synchronizing the `timeseries` object. It can be any one of the following:

- `Union` — Resample `timeseries` objects using a time vector that is a union of the time vectors of `ts1` and `ts2` on the time range where the two time vectors overlap.

- `Intersection` — Resample `timeseries` objects on a time vector that is the intersection of the time vectors of `ts1` and `ts2`.
- `Uniform` — Requires an additional argument as follows:

  ```
  [ts1 ts2] = synchronize(ts1,ts2,'Uniform','Interval',value)
  ```

  This method resamples time series on a uniform time vector, where `value` specifies the time interval between two consecutive samples. The uniform time vector is the overlap of the time vectors of `ts1` and `ts2`. The interval units are the smaller units of `ts1` and `ts2`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'InterpMethod'`

Forces the specified interpolation method (over the default method) for this synchronize operation. Can be either a string, `linear` or `zoh`, or a `tsdata.interpolation` object that contains a user-defined interpolation method.

Default: `linear`

`'QualityCode'`

Integer (between -128 and 127) used as the quality code for both time series after the synchronization.

`'KeepOriginalTimes'`

Logical value (`true` or `false`) indicating whether the new time series should keep the original time values.

`'tolerance'`

Real number used as the tolerance for differentiating two time values when comparing the `ts1` and `ts2` time vectors. The default tolerance is `1e-10`. For example, when the

sixth time value in `ts1` is `5+(1e-12)` and the sixth time value in `ts2` is `5-(1e-13)`, both values are treated as 5 by default. To differentiate those two times, you can set `'tolerance'` to a smaller value such as `1e-15`, for example.

Output Arguments

`ts1`

One of the `timeseries` objects that you synchronized and resampled.

`ts2`

The other `timeseries` object that you synchronized and resampled.

Examples

This example illustrates how the `KeepOriginalTime` property affects synchronization.

```
% Create two timeseries, such that ts1.timeinfo.StartDate
% is one day after ts2.timeinfo.StartDate:

ts1 = timeseries([1 2],[datestr(now); datestr(now+1)]);
ts2 = timeseries([1 2],[datestr(now-1); datestr(now)]);

% If you use this code, then ts1.timeinfo.StartDate
% is changed to match ts2.TimeInfo.StartDate
% and ts1.Time changes to 1:

[ts1 ts2] = synchronize(ts1,ts2,'union');

% But if you use this code, then ts1.timeinfo.StartDate
% is unchanged and ts1.Time is still 0:

[ts1 ts2] = synchronize(ts1,ts2,'union','KeepOriginalTimes',true);
```

See Also

set | timeseries

Topics

Introduced before R2006a

std

Class: timeseries

Standard deviation of `timeseries` data

Syntax

```
ts_std = std(ts)
ts_std = std(ts,Name,Value)
```

Description

`ts_std = std(ts)` returns the standard deviation of the `timeseries` data.

`ts_std = std(ts,Name,Value)` specifies additional options specified with one or more `Name,Value` pair arguments.

Input Arguments

`ts`

The `timeseries` object for which you want the standard deviation of the data.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'MissingData'`

A string specifying one of two possible values, `remove` or `interpolate`, indicating how to treat missing data during the calculation.

Default: `remove`

'Quality'

A vector of integers, indicating which quality codes represent missing samples (for vector data) or missing observations (for data arrays with two or more dimensions).

'Weighting'

A string specifying one of two possible values, `none` or `time`.
When you specify `time`, larger time values correspond to larger weights.

Output Arguments

ts_std

The standard deviation of `ts.Data` values as follows:

- When `ts.Data` is a vector, `ts_std` is the standard deviation of `ts.Data` values.
- When `ts.Data` is a matrix, and `IsTimeFirst` is `true`, and the first dimension of `ts` is aligned with time, then `ts_std` is the standard deviation of each column of `ts.Data`.

When `ts.Data` is an N-dimensional array, `std` always operates along the first nonsingleton dimension of `ts.Data`.

Examples

The following example finds the standard deviation for a `timeseries` object. MATLAB calculates the standard deviation for each data column in the `timeseries` object.

```
% Load a 24-by-3 data array:

load count.dat

% Create a timeseries object with 24 time values:

count_ts = timeseries(count,1:24,'Name','CountPerSecond');

% Calculate the standard deviation of each data column for this
% timeseries object:
```

```
std(count_ts)
```

MATLAB returns:

```
25.3703   41.4057   68.0281
```

Algorithms

MATLAB determines weighting by:

1. Attaching a weighting to each time value, depending on its order, as follows:
   - First time point — The duration of the first time interval `(t(2) - t(1))`.
   - Time point that is neither the first nor last time point — The duration between the midpoint of the previous time interval to the midpoint of the subsequent time interval `((t(k + 1) - t(k))/2 + (t(k) - t(k - 1))/2)`.
   - Last time point — The duration of the last time interval `(t(end) - t(end - 1))`.
2. Normalizing the weighting for each time by dividing each weighting by the mean of all weightings.

   Note: If the `timeseries` object is uniformly sampled, then the normalized weighting for each time is 1.0. Therefore, time weighting has no effect.
3. Multiplying the data for each time by its normalized weighting.

See Also

iqr | mean | min | var | max | median | sum | timeseries

Introduced before R2006a

sum

Class: timeseries

Sum of `timeseries` data

Syntax

```
ts_sm = sum(ts)
ts_sm = sum(ts,Name,Value)
```

Description

`ts_sm = sum(ts)` returns the sum of the `timeseries` data.

`ts_sm = sum(ts,Name,Value)` specifies additional options with one or more `Name,Value` pair arguments.

Input Arguments

`ts`

The `timeseries` object for which you want the sum of the data.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'MissingData'`

A string specifying one of two possible values, `remove` or `interpolate`, indicating how to treat missing data during the calculation.

Default: `remove`

`'Quality'`

A vector of integers, indicating which quality codes represent missing samples (for vector data) or missing observations (for data arrays with two or more dimensions).

`'Weighting'`

A string specifying one of two possible values, `none` or `time`.
When you specify `time`, larger time values correspond to larger weights.

Output Arguments

`ts_sm`

The sum of the `timeseries` data, as follows:

- When `ts.Data` is a vector, ts_sm is the sum of `ts.Data` values.
- When `ts.Data` is a matrix, and `IsTimeFirst` is `true`, and the first dimension of `ts` is aligned with time, then ts_sm is a row vector containing the sum of each column of `ts.Data`.

When `ts.Data` is a N-dimensional array, `sum` always operates along the first nonsingleton dimension of `ts.Data`.

Examples

Calculate the sum of each data column for a `timeseries` object:

```
% Load a 24-by-3 data array:

load count.dat

% Create a timeseries object with 24 time values:

count_ts = timeseries(count,1:24,'Name','CountPerSecond');

% Calculate the sum of each data column for this timeseries object:
```

```
sum(count_ts)
```

MATLAB returns:

```
768          1117          1574
```

Algorithms

MATLAB determines weighting by:

1. Attaching a weighting to each time value, depending on its order, as follows:
   - First time point — The duration of the first time interval `(t(2) - t(1))`.
   - Time point that is neither the first nor last time point — The duration between the midpoint of the previous time interval to the midpoint of the subsequent time interval `((t(k + 1) - t(k))/2 + (t(k) - t(k - 1))/2)`.
   - Last time point — The duration of the last time interval `(t(end) - t(end - 1))`.
2. Normalizing the weighting for each time by dividing each weighting by the mean of all weightings.

   Note: If the `timeseries` object is uniformly sampled, then the normalized weighting for each time is 1.0. Therefore, time weighting has no effect.
3. Multiplying the data for each time by its normalized weighting.

See Also

iqr | mean | min | var | max | median | std | timeseries

Introduced before R2006a

var

Class: timeseries

Variance of `timeseries` data

Syntax

```
ts_var = var(ts)
ts_var = var(ts,Name,Value)
```

Description

`ts_var = var(ts)` returns the variance of `ts.data`.

`ts_var = var(ts,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`ts`

The `timeseries` object for which you want the variance of the data.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'MissingData'`

A string specifying one of two possible values, `remove` or `interpolate`, indicating how to treat missing data during the calculation.

Default: `remove`

'Quality'

A vector of integers, indicating which quality codes represent missing samples (for vector data) or missing observations (for data arrays with two or more dimensions).

'Weighting'

A string specifying one of two possible values, `none` or `time`.
When you specify `time`, larger time values correspond to larger weights.

Output Arguments

ts_var

The variance of `ts.data`, as follows:

- When `ts.Data` is a vector, then `ts_var` is the variance of `ts.Data` values.
- When `ts.Data` is a matrix, and `IsTimeFirst` is `true`, and the first dimension of `ts` is aligned with time, then `ts_var` is a row vector containing the variance of each column of `ts.Data`.

When `ts.Data` is an N-dimensional array, `var` always operates along the first nonsingleton dimension of `ts.Data`.

Examples

The following example calculates the variance values of a multivariate `timeseries` object. MATLAB calculates the variance independently for each data column in the `timeseries` object.

Load a 24-by-3 data array. Then create a timeseries object with 24 time values.

```
load count.dat
count_ts = timeseries(count,[1:24],'Name','CountPerSecond');
```

Calculate the variance of each data column.

```
var(count_ts)
```

MATLAB returns:

```
1.0e+03 *
  0.6437    1.7144    4.6278
```

Algorithms

MATLAB determines weighting by:

1. Attaching a weighting to each time value, depending on its order, as follows:
   - First time point — The duration of the first time interval `(t(2) - t(1))`.
   - Time point that is neither the first nor last time point — The duration between the midpoint of the previous time interval to the midpoint of the subsequent time interval `((t(k + 1) - t(k))/2 + (t(k) - t(k - 1))/2)`.
   - Last time point — The duration of the last time interval `(t(end) - t(end - 1))`.
2. Normalizing the weighting for each time by dividing each weighting by the mean of all weightings.

   Note: If the `timeseries` object is uniformly sampled, then the normalized weighting for each time is 1.0. Therefore, time weighting has no effect.
3. Multiplying the data for each time by its normalized weighting.

See Also

iqr | mean | min | sum | max | median | std | timeseries

Introduced before R2006a

triangulation class

Triangulation in 2-D or 3-D

Description

Use `triangulation` to create an in-memory representation of any 2-D or 3-D triangulation data that is in matrix format, such as the matrix output from the `delaunay` function or other software tools. When your data is represented using `triangulation`, you can perform topological and geometric queries, which you can use to develop geometric algorithms. For example, you can find the triangles or tetrahedra attached to a vertex, those that share an edge, their circumcenters, and other features.

Construction

`TR = triangulation(T,P)` creates a 2-D or 3-D triangulation representation using the triangulation connectivity list, `T`, and the points in matrix `P`.

`TR = triangulation(T,x,y)` creates a 2-D triangulation representation with the point coordinates specified as column vectors, `x` and `y`.

`TR = triangulation(T,x,y,z)` creates a 3-D triangulation representation with the point coordinates specified as column vectors, `x`, `y`, and `z`.

Input Arguments

T

Triangulation connectivity list, specified as an `m`-by-`n` matrix, where `m` is the number of triangles or tetrahedra, and `n` is the number of vertices per triangle or tetrahedron. Each element in `T` is a "Vertex ID" on page 1-9702. Each row of `T` contains the vertex IDs that define a triangle or tetrahedron.

P

Points, specified as a matrix whose columns are the `x`, `y`, (and possibly `z`) coordinates of the triangulation points. The row numbers of `P` are the vertex IDs in the triangulation.

x

x-coordinates vector, specified as a column vector containing the x-coordinates of the triangulation points.

y

y-coordinates vector, specified as a column vector containing the y-coordinates of the triangulation points.

z

z-coordinates vector, specified as a column vector containing the z-coordinates of the triangulation points.

Properties

`Points`

Points in the triangulation, represented as a matrix containing the following information:

- Each row in `TR.Points` contains the coordinates of a vertex.
- Each row number of `TR.Points` is a vertex ID.

`ConnectivityList`

Triangulation connectivity list, represented as a matrix. This matrix contains the following information:

- Each element in `TR.ConnectivityList` is a vertex ID.
- Each row represents a triangle or tetrahedron in the triangulation.
- Each row number of `TR.ConnectivityList` is a "Triangle or Tetrahedron ID" on page 1-9703.

Methods

barycentricToCartesian	Converts point coordinates from barycentric to Cartesian

cartesianToBarycentric	Converts point coordinates from Cartesian to barycentric
circumcenter	Circumcenter of triangle or tetrahedron
edgeAttachments	Triangles or tetrahedra attached to specified edge
edges	Triangulation edges
faceNormal	Triangulation face normal
featureEdges	Triangulation sharp edges
freeBoundary	Triangulation facets referenced by only one triangle or tetrahedron
incenter	Incenter of triangle or tetrahedron
isConnected	Test if two vertices are connected by edge
nearestNeighbor	Vertex closest to specified location
neighbors	Neighbors to specified triangle or tetrahedron
pointLocation	Triangle or tetrahedron containing specified point
size	Size of triangulation connectivity list
vertexAttachments	Triangles or tetrahedra attached to specified vertex
vertexNormal	Triangulation vertex normal

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

2-D Triangulation

Define the points in the triangulation.

```
P = [ 2.5    8.0
      6.5    8.0
      2.5    5.0
      6.5    5.0
      1.0    6.5
      8.0    6.5];
```

Define the triangles. This is the triangulation connectivity list.

```
T = [5  3  1;
     3  2  1;
     3  4  2;
     4  6  2];
```

Create the triangulation representation.

```
TR = triangulation(T,P)
```

```
TR 
  triangulation with properties:

              Points: [6×2 double]
    ConnectivityList: [4×3 double]
```

Examine the coordinates of the vertices of the first triangle.

```
TR.Points(TR.ConnectivityList(1,:),:)
```

```
ans 

    1.0000    6.5000
    2.5000    5.0000
    2.5000    8.0000
```

Definitions

Vertex ID

A row number of the matrix, `TR.Points`. Use this ID to refer a specific vertex in the triangulation.

Triangle or Tetrahedron ID

A row number of the matrix, `TR.ConnectivityList`. Use this ID to refer a specific triangle or tetrahedron.

See Also

See Also

delaunayTriangulation

barycentricToCartesian

Class: triangulation

Converts point coordinates from barycentric to Cartesian

Syntax

```
PC = barycentricToCartesian(TR,ti,B)
```

Description

`PC = barycentricToCartesian(TR,ti,B)` returns the Cartesian coordinates of the points in `B`. Each row, `B(j,:)`, contains the barycentric coordinates of a point with respect to the triangle or tetrahedron, `ti(j)`. The point, `PC(j,:)`, is the `j`th point represented in Cartesian coordinates.

Input Arguments

`TR`

Triangulation representation, see triangulation or delaunayTriangulation.

`ti`

Triangle or tetrahedron IDs, specified as a column vector.

`B`

Barycentric coordinates, specified as a matrix. Each row, `B(j,:)`, contains the barycentric coordinates of a point with respect to the triangle or tetrahedron, `ti(j)`.

Output Arguments

`PC`

Cartesian coordinates, returned as a matrix. The point, `PC(j,:)`, is the `j`th point represented in Cartesian coordinates.

Examples

Barycentric Coordinates Converted to Cartesian Coordinates

Create a triangulation from a set of points, P, and triangulation connectivity list, T.

```
P = [ 2.5    8.0
      6.5    8.0
      2.5    5.0
      6.5    5.0
      1.0    6.5
      8.0    6.5];

T = [5  3  1;
     3  2  1;
     3  4  2;
     4  6  2];

TR = triangulation(T,P);
```

Specify the first triangle.

```
ti = 1;
```

Specify the barycentric coordinates of the second point in the triangle.

```
B = [0 1 0];
```

Convert the point to Cartesian coordinates.

```
PC = barycentricToCartesian(TR,ti,B)
```

```
PC =

    2.5000    5.0000
```

Mapped Incenters of Deformed Triangulation

Create a Delaunay triangulation from a set of points.

```
x = [0 4 8 12 0 4 8 12]';
y = [0 0 0 0 8 8 8 8]';
```

```
DT = delaunayTriangulation(x,y);
```

Calculate the Cartesian coordinates of the incenters.

```
cc = incenter(DT);
```

Plot the original triangulation and reference points.

```
figure
subplot(1,2,1);
triplot(DT);
hold on;
plot(cc(:,1),cc(:,2),'*r');
hold off;
axis equal;
```

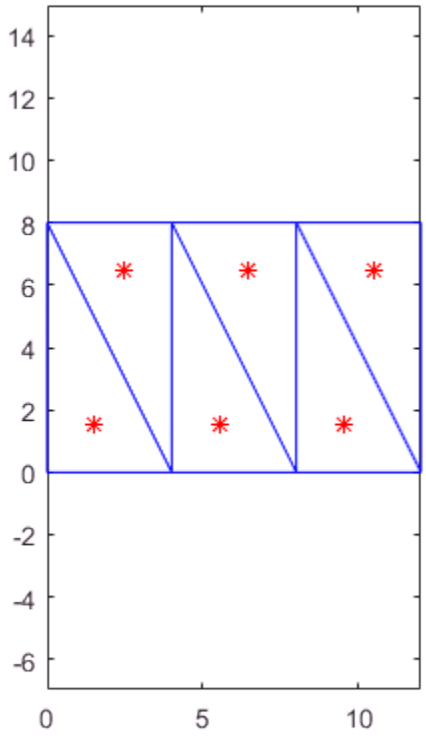

Create a new triangulation which is a deformed version of DT .

```
ti = DT.ConnectivityList;
y = [0 0 0 0 16 16 16 16]';
TR = triangulation(ti,x,y);
```

Compute the barycentric coordinates for the incenters of DT, and use them to compute the Cartesian coordinates of the analogous points in TR.

```
b = cartesianToBarycentric(DT,[1:length(ti)]',cc);
xc = barycentricToCartesian(TR,[1:length(ti)]',b);
```

Plot the deformed triangulation and mapped locations of the reference points.

```
subplot(1,2,2);
triplot(TR);
hold on;
plot(xc(:,1),xc(:,2),'*r');
hold off;
axis equal;
```

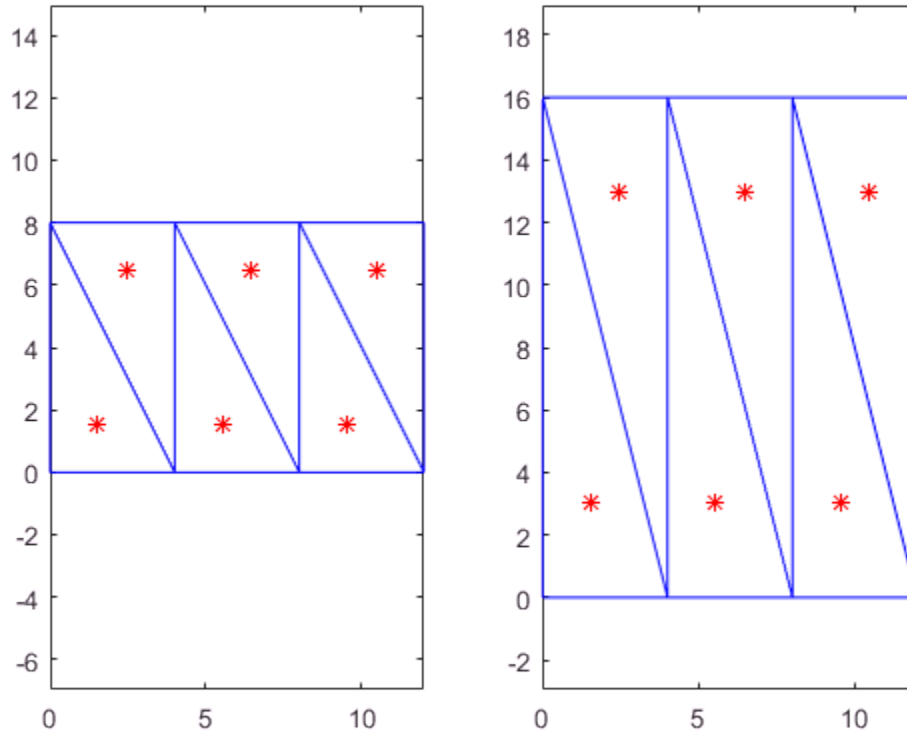

Definitions

Triangle or Tetrahedron ID

A row number of the matrix, `TR.ConnectivityList`. Use this ID to refer a specific triangle or tetrahedron.

See Also

See Also

cartesianToBarycentric | delaunayTriangulation

cartesianToBarycentric

Class: triangulation

Converts point coordinates from Cartesian to barycentric

Syntax

```
B = cartesianToBarycentric(TR,ti,PC)
```

Description

`B = cartesianToBarycentric(TR,ti,PC)` returns the barycentric coordinates of the points in `PC`. Each row, `PC(j,:)`, contains the Cartesian coordinates of a point you want to convert. `B(j,:)` are the barycentric coordinates of the point, `PC(j,:)`, with respect to triangle or tetrahedron, `ti(j)`.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

ti

Triangle or tetrahedron IDs, specified as a column vector.

PC

Cartesian coordinates, specified as a matrix. Each row, `PC(j,:)`, contains the Cartesian coordinates of a point with respect to triangle or tetrahedron, `ti(j)`.

Output Arguments

B

Barycentric coordinates, returned as a matrix. `B(j,:)` are the barycentric coordinates of `PC(j,:)` with respect to `ti(j)`.

Examples

Cartesian Coordinates Converted to Barycentric Coordinates

Create a triangulation from a set of points, P, and triangulation connectivity list, T.

```
P = [ 2.5    8.0
      6.5    8.0
      2.5    5.0
      6.5    5.0
      1.0    6.5
      8.0    6.5];

T = [5  3  1;
     3  2  1;
     3  4  2;
     4  6  2];

TR = triangulation(T,P);
```

Specify the first triangle.

```
ti = 1;
```

Get the coordinates of the third vertex in the first triangle.

```
PC = TR.Points(TR.ConnectivityList(1,3),:)
```

```
PC =

    2.5000    8.0000
```

Convert the point to barycentric coordinates.

```
B = cartesianToBarycentric(TR,ti,PC)
```

```
B =

     0     0     1
```

Mapped Incenters of Deformed Triangulation

Create a Delaunay triangulation from a set of points.

```
x = [0 4 8 12 0 4 8 12]';
y = [0 0 0 0 8 8 8 8]';
DT = delaunayTriangulation(x,y);
```

Calculate the Cartesian coordinates of the incenters.

```
cc = incenter(DT);
```

Plot the original triangulation and reference points.

```
figure
subplot(1,2,1);
triplot(DT);
hold on;
plot(cc(:,1),cc(:,2),'*r');
hold off;
axis equal;
```

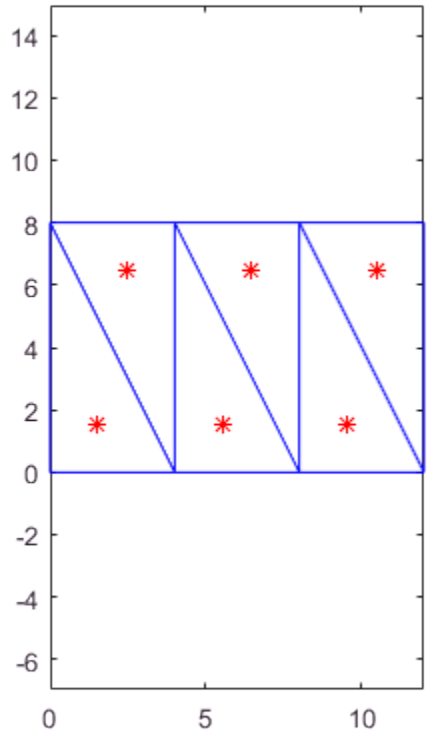

Create a new triangulation which is a deformed version of DT .

```
ti = DT.ConnectivityList;
y = [0 0 0 0 16 16 16 16]';
TR = triangulation(ti,x,y);
```

Compute the barycentric coordinates for the incenters of DT, and use them to compute the Cartesian coordinates of the analogous points in TR.

```
b = cartesianToBarycentric(DT,[1:length(ti)]',cc);
xc = barycentricToCartesian(TR,[1:length(ti)]',b);
```

Plot the deformed triangulation and mapped locations of the reference points.

```
subplot(1,2,2);
```

```
triplot(TR);
hold on;
plot(xc(:,1),xc(:,2),'*r');
hold off;
axis equal;
```

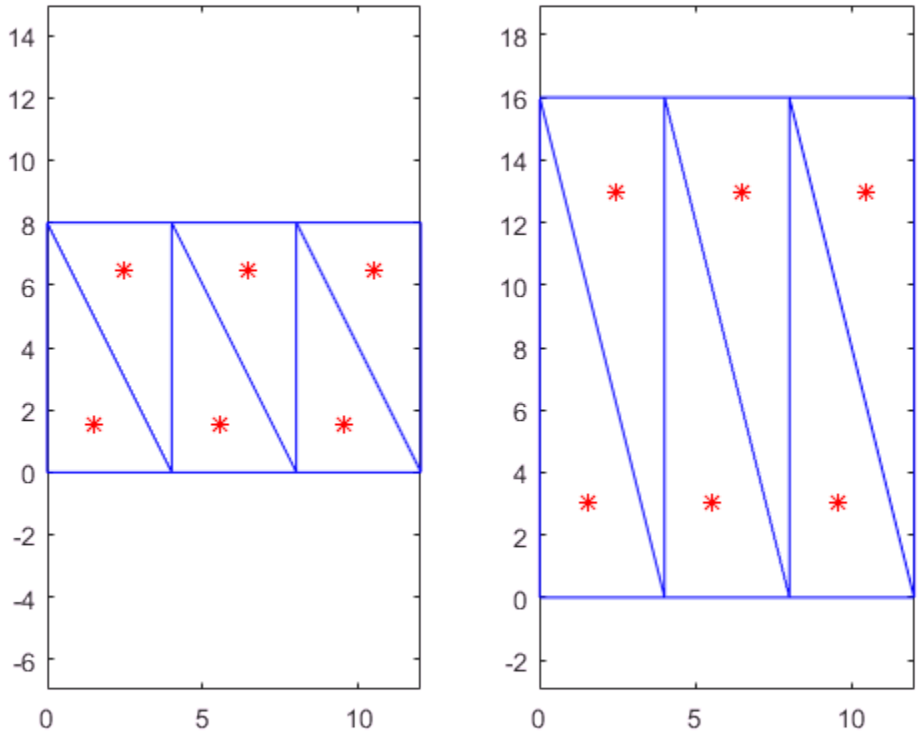

Definitions

Triangle or Tetrahedron ID

A row number of the matrix, `TR.ConnectivityList`. Use this ID to refer a specific triangle or tetrahedron.

See Also

See Also

barycentricToCartesian | delaunayTriangulation

circumcenter

Class: triangulation

Circumcenter of triangle or tetrahedron

Syntax

```
CC = circumcenter(TR,ti)
[CC,r] = circumcenter(TR,ti)
CC = circumcenter(TR)
[CC,r] = circumcenter(TR)
```

Description

`CC = circumcenter(TR,ti)` returns the coordinates of the circumcenter of each triangle or tetrahedron specified in `ti`.

`[CC,r] = circumcenter(TR,ti)` also returns the corresponding radii of the circumscribed circles or spheres.

`CC = circumcenter(TR)` returns the circumcenters of all triangles or tetrahedra in the triangulation.

`[CC,r] = circumcenter(TR)` also returns the corresponding radii of the circumscribed circles or spheres for the entire triangulation.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

ti

Triangle or tetrahedron IDs, specified as a column vector.

Output Arguments

CC

Circumcenters, returned as a matrix. Each row, `CC(j,:)`, contains the coordinates of the circumcenter of `ti(j)`.

r

Radii of the circumscribed circles or spheres, returned as a vector. The radius at `r(j)` corresponds to the circle or sphere circumscribing `ti(j)`.

Examples

Circumcenters in 2-D Triangulation

Load 2-D triangulation data and create a triangulation representation.

```
load trimesh2d
TR = triangulation(tri,x,y);
```

Compute the circumcenters.

```
CC = circumcenter(TR);
triplot(TR)
axis([-100 400 -50 350])
hold on
plot(CC(:,1),CC(:,2),'*r')
hold off
```

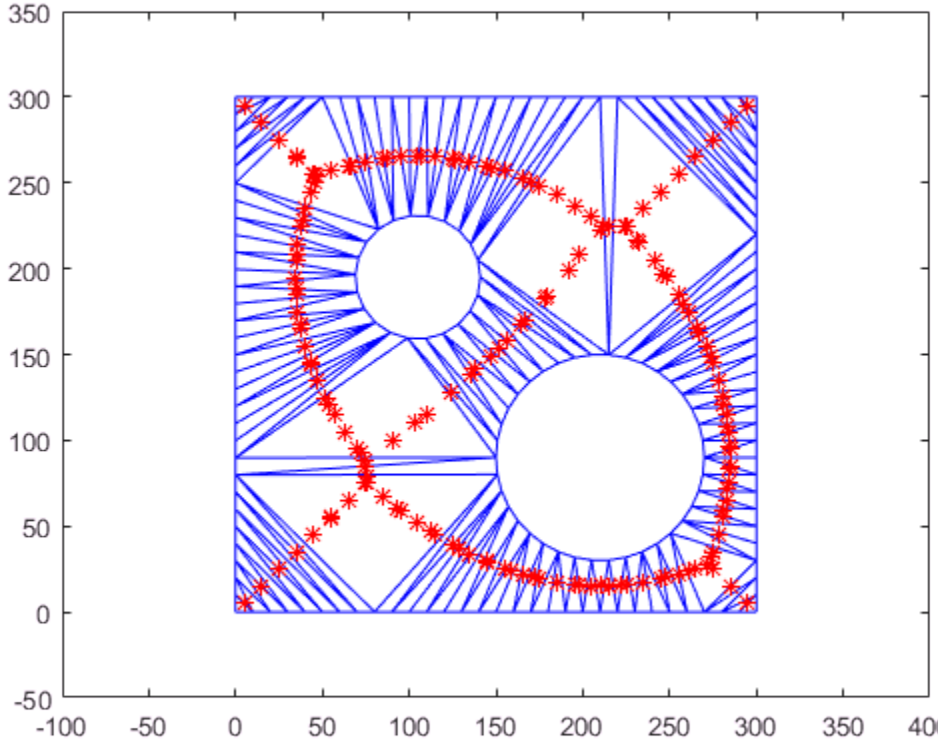

The circumcenters represent points on the medial axis of the polygon.

Circumcenters in 3-D Delaunay Triangulation

Create the Delaunay triangulation using a random set of points, P.

```
P = gallery('uniformdata',10,3,0);
DT = delaunayTriangulation(P);
```

Calculate the circumcenters of the first five tetrahedra in DT.

```
CC = circumcenter(DT,[1:5]')
```

```
CC =
```

```
    0.9626    0.3892    0.0928
    6.3458    0.2377    3.1814
    0.4820    0.9064    0.5176
   -1.2993    1.8384   -1.2185
   -0.1595    1.0852   -0.2536
```

Definitions

Triangle or Tetrahedron ID

A row number of the matrix, `TR.ConnectivityList`. Use this ID to refer a specific triangle or tetrahedron.

See Also

See Also

delaunayTriangulation | incenter

edgeAttachments

Class: triangulation

Triangles or tetrahedra attached to specified edge

Syntax

```
ti = edgeAttachments(TR,vstart,vend)
ti = edgeAttachments(TR,E)
```

Description

`ti = edgeAttachments(TR,vstart,vend)` returns the triangles or tetrahedra attached to the specified edges. To specify the edges, use the vectors, `vstart` and `vend`. These vectors contain the "Vertex ID" on page 1-9722 at the start and end of each edge.

`ti = edgeAttachments(TR,E)` specifies the starting and ending vertices of each edge in a 2-column matrix, `E`.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

vstart

IDs of starting vertices, specified as a column vector of vertex IDs. Each ID refers to a vertex at the start of an edge.

vend

IDs of ending vertices, specified as a column vector of vertex IDs. Each ID refers to a vertex at the end of an edge.

E

IDs of the edge vertices, specified as a 2-column matrix of vertex IDs. Each row of `E` corresponds to an edge and contains two IDs:

- `E(j,1)` is the ID of the vertex at the start of an edge.
- `E(j,2)` is the ID of the vertex at end of the edge.

Output Arguments

ti

IDs of the triangles or tetrahedra attached to the edges, returned as an `m`-by-`1` cell array. Each cell in `ti` contains the IDs of the attached triangles or tetrahedra. The attachments to the edge located between the vertices, `vstart(j)` and `vend(j)`, or `E(j,:)`, are returned in `ti{j}`. The attachments are returned in a cell array because the number of triangles or tetrahedra associated with each edge can vary.

Examples

Edge Attachments in 3-D Triangulation

Load 2-D triangulation data and create a triangulation representation.

```
load tetmesh
TR = triangulation(tet,X);
```

Define the starting and ending vertices of the edges.

```
vstart = [15; 21];
vend = [936; 716];
```

Find the edge attachments.

```
ti = edgeAttachments(TR,vstart,vend);
```

Examine the attachments to the first edge.

```
ti{1}
```

```
ans =
```

```
         927        2060        3438        3423        2583        4690
```

Edge Attachments in 2-D Delaunay Triangulation

Create a Delaunay triangulation.

```
x = [0 1 1 0 0.5]';
y = [0 0 1 1 0.5]';
DT = delaunayTriangulation(x,y);
```

Find the triangles attached to edge `(1,5)`.

```
ti = edgeAttachments(DT,1,5);
ti{:}
```

```
ans =

     4     1
```

Definitions

Vertex ID

A row number of the matrix, `TR.Points`. Use this ID to refer a specific vertex in the triangulation.

Triangle or Tetrahedron ID

A row number of the matrix, `TR.ConnectivityList`. Use this ID to refer a specific triangle or tetrahedron.

See Also

See Also

delaunayTriangulation | edges | vertexAttachments

edges

Class: triangulation

Triangulation edges

Syntax

```
E = edges(TR)
```

Description

`E = edges(TR)` returns the triangulation edges as a matrix of vertex IDs. The vertices referenced in `E` indicate the beginning and end of each edge.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

Output Arguments

E

Edge vertex IDs, returned as a 2-column matrix. Each row of `E` corresponds to an edge and contains two IDs:

- `E(j,1)` is the ID of the vertex at the start of the edge.
- `E(j,2)` is the ID of the vertex at end of the edge.

Examples

Edges in a 2-D Triangulation

Load 2-D triangulation data and create a triangulation representation.

```
load trimesh2d
TR = triangulation(tri,x,y);
```

Find the edges in the triangulation.

```
E = edges(TR);
```

List the first five edges.

```
E(1:5,:)
```

```
ans =

     1     2
     1   118
     1   119
     1   120
     2     3
```

Edges in a 2-D Delaunay Triangulation

Create 2-D Delaunay triangulation from a set of 10 random points.

```
X = gallery('uniformdata',[10, 2],0);
DT = delaunayTriangulation(X);
```

Find the edges in the triangulation.

```
E = edges(DT)
```

```
E =

     1     3
     1     4
     1     5
     1     6
     1     9
     2     4
     2     5
     2     6
     2     7
     2     8
```

Definitions

Vertex ID

A row number of the matrix, `TR.Points`. Use this ID to refer a specific vertex in the triangulation.

See Also

See Also

delaunayTriangulation | edgeAttachments

faceNormal

Class: triangulation

Triangulation face normal

Syntax

```
FN = faceNormal(TR,ti)
FN = faceNormal(TR)
```

Description

`FN = faceNormal(TR,ti)` returns the unit normal vector to each triangle specified by `ti`. The `faceNormal` function supports only 2-D triangulations.

`FN = faceNormal(TR)` returns the unit normal vectors to all triangles.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

ti

Triangle IDs, specified as a column vector.

Output Arguments

FN

Face normals, returned as a matrix. Each row, `FN(j,:)`, is the unit normal vector to triangle `ti(j)`.

If you do not specify `ti`, then `faceNormal` returns the unit normal information for the entire triangulation. In this case, the normal associated with `TR.ConnectivityList(j,:)` is `FN(j,:)`.

Examples

Plot Unit Normals to Facets on a Spherical Surface

Create a set of random points on a spherical surface.

```
theta = gallery('uniformdata',[100,1],0)*2*pi;
phi = gallery('uniformdata',[100,1],1)*pi;
x = cos(theta).*sin(phi);
y = sin(theta).*sin(phi);
z = cos(phi);
```

Triangulate the points with `delaunayTriangulation`.

```
DT = delaunayTriangulation(x,y,z);
```

Find the free boundary facets and use them to create a triangulation representation for plotting.

```
[T,Xb] = freeBoundary(DT);
TR = triangulation(T,Xb);
```

Plot the triangulation.

```
figure
trisurf(T,Xb(:,1),Xb(:,2),Xb(:,3), ...
     'FaceColor', 'cyan', 'faceAlpha', 0.8);
axis equal;
hold on;

% Calculate the incenters and face normals.
P = incenter(TR);
fn = faceNormal(TR);

% Display the normal vectors on the surface.
quiver3(P(:,1),P(:,2),P(:,3), ...
     fn(:,1),fn(:,2),fn(:,3),0.5, 'color','r');
```

```
hold off;
```

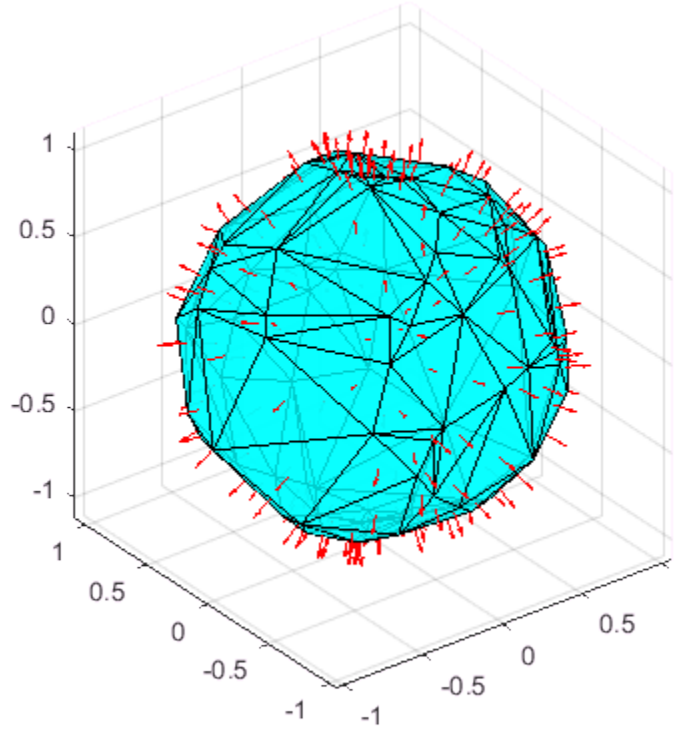

Definitions

Triangle ID

A row number of the matrix, `TR.ConnectivityList`. You use this ID to refer a specific triangle.

See Also

See Also

delaunayTriangulation | freeBoundary

featureEdges

Class: triangulation

Triangulation sharp edges

Syntax

```
FE = featureEdges(TR,filterangle)
```

Description

`FE = featureEdges(TR,filterangle)` returns the feature edges in a 2-D triangulation.

Use this method to extract the sharp edges in the surface mesh for display purposes. A feature edge is an edge that has any of the following attributes:

- The edge is shared by only one triangle.
- The edge is shared by more than two triangles.
- The edge is shared by a pair of triangles with angular deviation greater than the `filterangle`.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

filterangle

Filter angle, specified as a scalar value in the range $[0,\pi]$. `featureEdges` returns adjacent triangles that have a dihedral angle that deviates from π by an angle greater than `filterangle`.

Output Arguments

FE

Feature edge vertex IDs, returned as a two-column matrix. Each row of FE corresponds to a feature edge and contains two IDs:

- FE(j,1) is the ID of the vertex at the start of the edge.
- FE(j,2) is the ID of the vertex at end of the edge.

Examples

Feature Edges Shown on a Surface

Use featureEdges to find the feature edges of a surface and display them on a plot.

Create a surface triangulation.

```
x = [0 0 0 0 0 3 3 3 3 3 3 6 6 6 6 6 9 9 9 9 9 9]';
y = [0 2 4 6 8 0 1 3 5 7 8 0 2 4 6 8 0 1 3 5 7 8]';
DT = delaunayTriangulation(x,y);
T = DT(:,:);
```

Elevate the 2-D mesh to create a surface.

```
z = [0 0 0 0 0 2 2 2 2 2 2 0 0 0 0 0 0 0 0 0 0 0]';
subplot(1,2,1);
trisurf(T,x,y,z,'FaceColor','cyan');
axis equal;
```



Compute the feature edges using a filter angle of `pi/6`.

```
TR = triangulation(T,x,y,z);
fe = featureEdges(TR,pi/6)';
subplot(1,2,2);
trisurf(TR,'FaceColor','cyan','EdgeColor',...
'none','FaceAlpha',0.8);
axis equal;

% Add the feature edges to the plot.
hold on;
plot3(x(fe), y(fe), z(fe), 'k', 'LineWidth',1.5);
hold off;
```

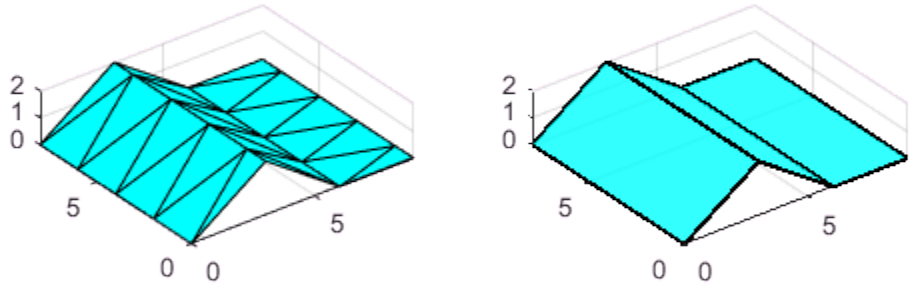

Definitions

Vertex ID

A row number of the matrix, `TR.Points`. Use this ID to refer a specific vertex in the triangulation.

See Also

See Also

delaunayTriangulation | edges

freeBoundary

Class: triangulation

Triangulation facets referenced by only one triangle or tetrahedron

Syntax

```
FBtri = freeBoundary(TR)
[FBtri,FBpoints] = freeBoundary(TR)
```

Description

`FBtri = freeBoundary(TR)` returns the free boundary facets of `TR.ConnectivityList`. A facet in `TR` is on the free boundary if it is referenced by only one triangle or tetrahedron.

`[FBtri,FBpoints] = freeBoundary(TR)` also returns a matrix containing the vertices of the free boundary facets.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

Output Arguments

FBtri

Triangulation connectivity list, returned as a matrix that contains the following information:

- Each row in `FBtri` represents a facet on the free boundary.

- Each element is a “Vertex ID” on page 1-9739.

The vertex IDs in `FBtri` reference a specific matrix, depending on the syntax you choose:

- If you call `freeBoundary` with one output argument, then the elements of `FBtri` are row numbers of `TR.Points`.
- If you call `freeBoundary` with two output arguments, then the elements of `FBtri` are row numbers of `FBpoints`.

`FBpoints`

Free boundary points, returned as a matrix containing the coordinates of the vertices of the free boundary facets. Each row of `FBpoints` contains coordinates of a vertex.

Examples

Surface of 3-D Triangulation

Use `freeBoundary` to extract the facets of a 3-D triangulation that cover the surface of an object.

Load a 3-D triangulation.

```
load tetmesh;
TR = triangulation(tet,X);
```

Compute the boundary triangulation.

```
[FBtri,FBpoints] = freeBoundary(TR);
```

Plot the boundary triangulation.

```
trisurf(FBtri,FBpoints(:,1),FBpoints(:,2),FBpoints(:,3), ...
       'FaceColor','cyan','FaceAlpha', 0.8);
```

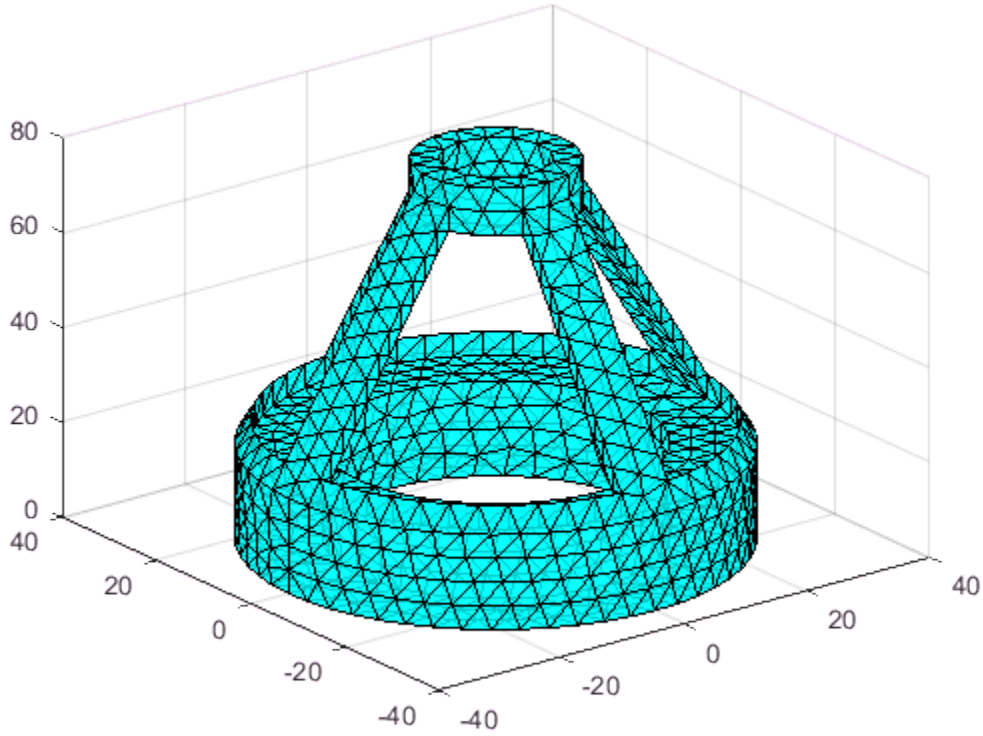

Free Boundary of 2-D Delaunay Triangulation

Use `freeBoundary` when you want to highlight the outer edges of a 2-D Delaunay triangulation.

Create a triangulation from a random set of points.

```
x = gallery('uniformdata',[20,1],0);
y = gallery('uniformdata',[20,1],1);
DT = delaunayTriangulation(x,y);
```

Find the free boundary edges.

```
fe = freeBoundary(DT)';
```

Plot the mesh and highlight the free boundary edges in red.

```
triplot(DT);
hold on;
plot(x(fe),y(fe),'-r','LineWidth',2) ;
hold off;
```

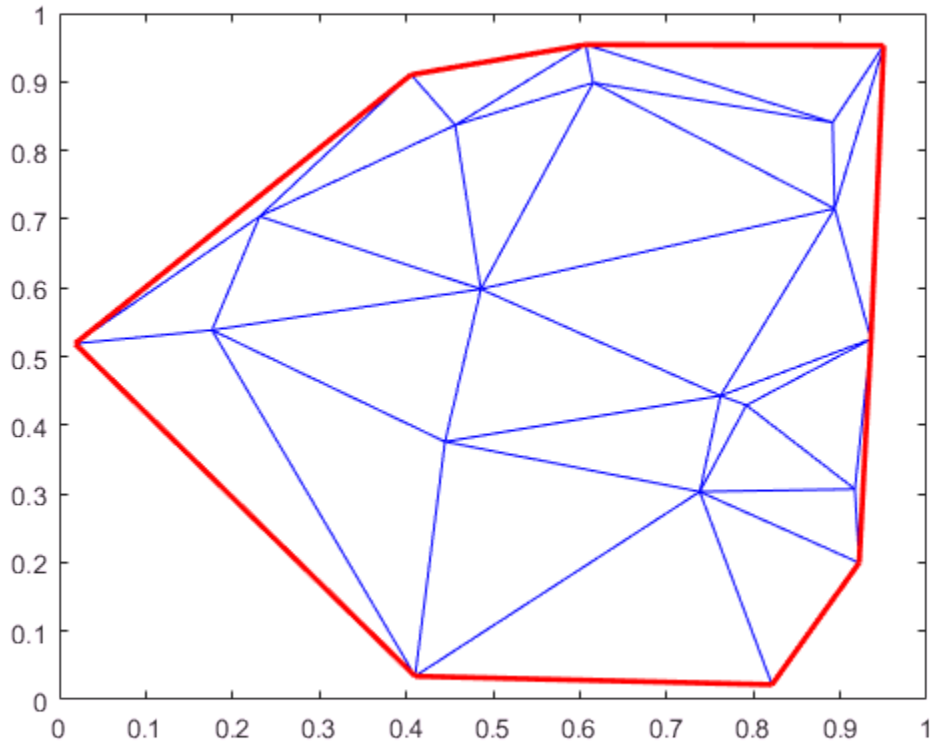

Definitions

Vertex ID

A row number of the matrix, `TR.Points` or `FBpoints`. Use this ID to refer a specific vertex in the triangulation.

See Also

See Also

delaunayTriangulation | faceNormal | featureEdges

incenter

Class: triangulation

Incenter of triangle or tetrahedron

Syntax

```
IC = incenter(TR,ti)
[IC,r] = incenter(TR,ti)
```

Description

`IC = incenter(TR,ti)` returns the coordinates of the incenter of each triangle or tetrahedron specified by `ti`.

`[IC,r] = incenter(TR,ti)` also returns the radii of the inscribed circles or spheres.

Input Arguments

`TR`

Triangulation representation, see triangulation or delaunayTriangulation.

`ti`

Triangle or tetrahedron IDs, specified as a column vector.

Output Arguments

`IC`

Incenters, returned as a matrix. Each row of `IC` contains the coordinates of an incenter. For example, `IC(j,:)` is the incenter of `ti(j)`.

r

Radii of the inscribed circles or spheres, returned as a vector. `r(j)` is the radius of the inscribed circle or sphere whose center is `IC(j,:)`.

Examples

Find Incenters in 3-D Triangulation

Load a 3-D triangulation.

```
load tetmesh
```

Calculate the incenters of the first five tetrahedra.

```
TR = triangulation(tet,X);
IC = incenter(TR,[1:5]')
```

```
IC =

   -6.1083  -31.0234    8.1439
   -2.1439  -31.0283    5.8742
   -1.9555  -31.9463    7.4112
   -4.3019  -30.8460   10.5169
   -3.1596  -29.3642    6.1851
```

Find Incenters in 2-D Delaunay Triangulation

Create the Delaunay triangulation.

```
x = [0 1 1 0 0.5]';
y = [0 0 1 1 0.5]';
DT = delaunayTriangulation(x,y);
```

Calculate incenters of the triangles

```
IC = incenter(DT)
```

```
IC =

    0.2071    0.5000
    0.5000    0.7929
```

```
    0.7929    0.5000
    0.5000    0.2071
```

Plot the triangles and incenters.

```
figure
triplot(DT)
axis equal
axis([-0.2 1.2 -0.2 1.2])
hold on
plot(IC(:,1),IC(:,2),'*r')
hold off
```

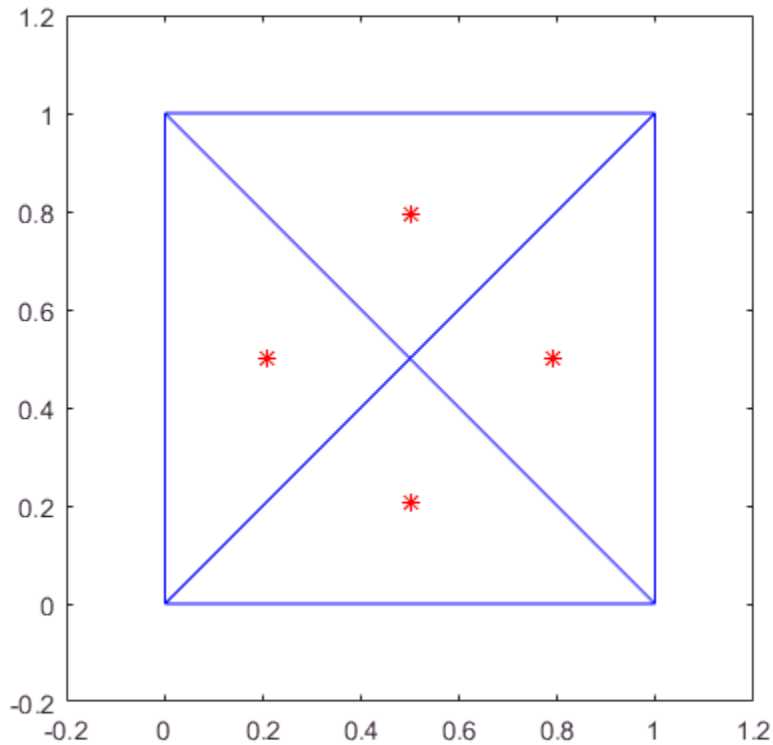

Definitions

Triangle or Tetrahedron ID

A row number of the matrix, `TR.ConnectivityList`. Use this ID to refer a specific triangle or tetrahedron.

See Also

See Also

circumcenter | delaunayTriangulation

isConnected

Class: triangulation

Test if two vertices are connected by edge

Syntax

```
tf = isConnected(TR,vstart,vend)
tf = isConnected(TR,E)
```

Description

`tf = isConnected(TR,vstart,vend)` returns a `logical` array of `true` or `false` values that indicate whether the specified pairs of vertices are connected by an edge. Element `tf(j)` is `true` when the vertices, `vstart(j)` and `vend(j)`, are connected by an edge.

`tf = isConnected(TR,E)` specifies the edge start and end indices in matrix `E`. Element `tf(j)` is `true` when the vertices, `E(j,1)` and `E(j,2)`, are connected by an edge.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

vstart

IDs of start vertices, specified as a column vector. Each vertex ID refers to a vertex at the start of an edge.

vend

IDs of end vertices, specified as a column vector. Each vertex ID refers to a vertex at the end of an edge.

E

IDs of the edge vertices, specified as a two-column matrix. Each row of `E` corresponds to a candidate edge and contains two IDs:

- `E(j,1)` is the ID of the vertex at the start of a candidate edge.
- `E(j,2)` is the ID of the vertex at end of the edge.

Output Arguments

tf

Logical values, returned as a column vector. Element `tf(j)` is `true` when either of the following are true:

- The vertices, `vstart(j)` and `vend(j)`, are connected by an edge.
- The vertices, `E(j,1)` and `E(j,2)`, are connected by an edge.

Otherwise, `tf(j)` is false.

Examples

Determine Whether Vertices are connected by an Edge in 2-D

Load a 2-D triangulation.

```
load trimesh2d
TR = triangulation(tri,x,y);
```

Determine whether vertices 3 and 117 are connected by an edge.

```
isConnected(TR,3,117)
```

```
ans = logical
   1
```

The vertices are connected by an edge.

Determine whether vertices 3 and 164 are connected by an edge.

```
isConnected(TR,3,164)
```

```
ans = logical
   0
```

The vertices are not connected by an edge.

Determine Whether Vertices are connected by an Edge in 3-D

```
X = gallery('uniformdata',[10,3],0);
DT = delaunayTriangulation(X);
```

Determine whether vertices 2 and 7 are connected by an edge.

```
E = [2 7];
isConnected(DT,E)
```

```
ans = logical
   1
```

The vertices are connected by an edge.

Definitions

Vertex ID

A row number of the matrix, `TR.Points`. Use this ID to refer a specific vertex in the triangulation.

See Also

See Also

delaunayTriangulation | edgeAttachments | edges

nearestNeighbor

Class: triangulation

Vertex closest to specified location

Syntax

```
vi = nearestNeighbor(T,QP)
vi = nearestNeighbor(T,qx,qy)
vi = nearestNeighbor(T,qx,qy,qz)
[vi,d] = nearestNeighbor( ___ )
```

Description

`vi = nearestNeighbor(T,QP)` returns the IDs of the vertices closest to the query points in `QP`. Each row in matrix `QP` contains the `x`, `y`, (and possibly `z`) coordinates of a query point.

`vi = nearestNeighbor(T,qx,qy)` specifies the `x` and `y` coordinates of the query points in 2-D as separate column vectors.

`vi = nearestNeighbor(T,qx,qy,qz)` specifies the `x`, `y`, and `z` coordinates of the query points in 3-D as separate column vectors.

`[vi,d] = nearestNeighbor( ___ )` also returns the Euclidean distance between each query point and its nearest neighbor. You can specify both output arguments with any of the previous syntaxes.

Note: `nearestNeighbor` does not support Delaunay triangulations with constrained edges.

Input Arguments

`T` — Triangulation representation
`triangulation` object | `delaunayTriangulation` object

Triangulation representation, specified as a `triangulation` object or `delaunayTriangulation` object. For more information, see triangulation or delaunayTriangulation.

`QP` — Query points
matrix with 2 columns (2-D) | matrix with 3 columns (3-D)

Query points, specified as a matrix with 2 or 3 columns. `QP` contains the `x`, `y`, (and possibly `z`) coordinates of the query points.

`qx` — Query point x-coordinates
column vector

Query point x-coordinates, specified as a column vector.

`qy` — Query point y-coordinates
column vector

Query point y-coordinates, specified as a column vector.

`qz` — Query point z-coordinates
column vector

Query point z-coordinates, specified as a column vector.

Output Arguments

`vi` — Vertex IDs of nearest neighbor
column vector

Vertex IDs of the nearest neighbor, returned as a column vector. `vi(j)` is the vertex ID of the nearest neighbor to the query point `QP(j,:)`.

`d` — Distance to nearest neighbor
column vector

Distance to the nearest neighbor, returned as a column vector of the same length as `vi`. The value at `d(j)` is the Euclidean distance between the `j`th query point `QP(j,:)` and its nearest neighbor.

Examples

Determine Nearest Neighbors of Query Points

Define the points and connectivity of the triangulation.

```
P = [2.5 8.0; 6.5 8.0; 2.5 5.0; 6.5 5.0; 1.0 6.5; 8.0 6.5];
T = [5 3 1; 3 2 1; 3 4 2; 4 6 2];
TR = triangulation(T,P);
```

Define two query points.

```
QP = [2 4; 6 6.5];
```

Plot the triangulation and the query points.

```
triplot(TR)
hold on
plot(QP(:,1),QP(:,2),'r*')
ylim([1.5 8.5])
xlim([0.5 8.5])
```

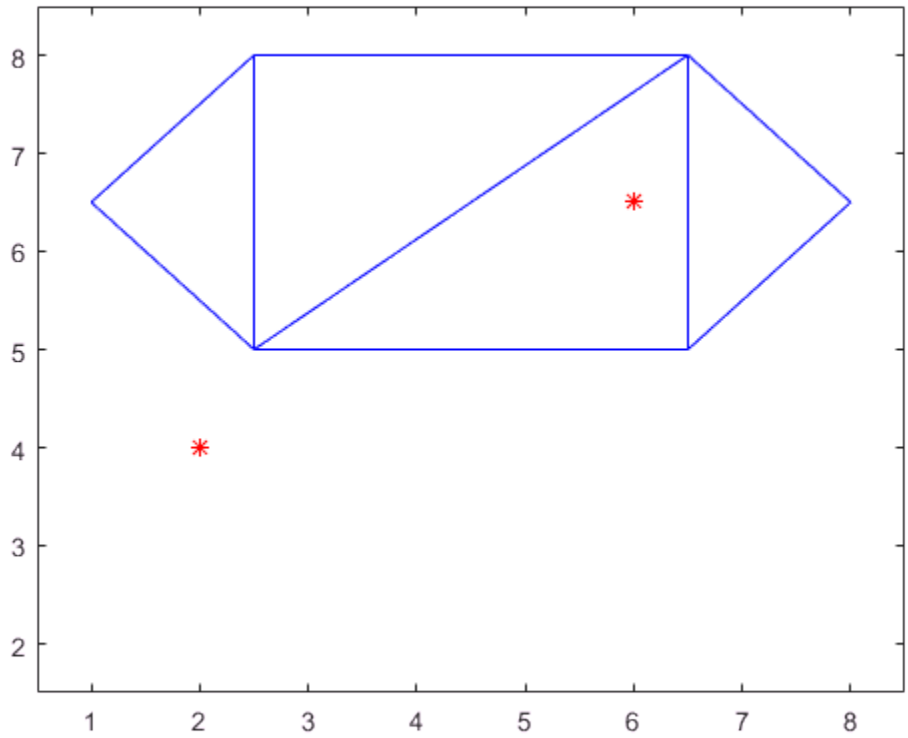

Find the nearest neighbors to the query points, as well as the distances between them.

```
[vi,d] = nearestNeighbor(TR,QP);
```

Highlight the points in the triangulation that are the nearest neighbors to the query points.

```
TP = P(vi,:);
plot(TP(:,1),TP(:,2),'ks')
```

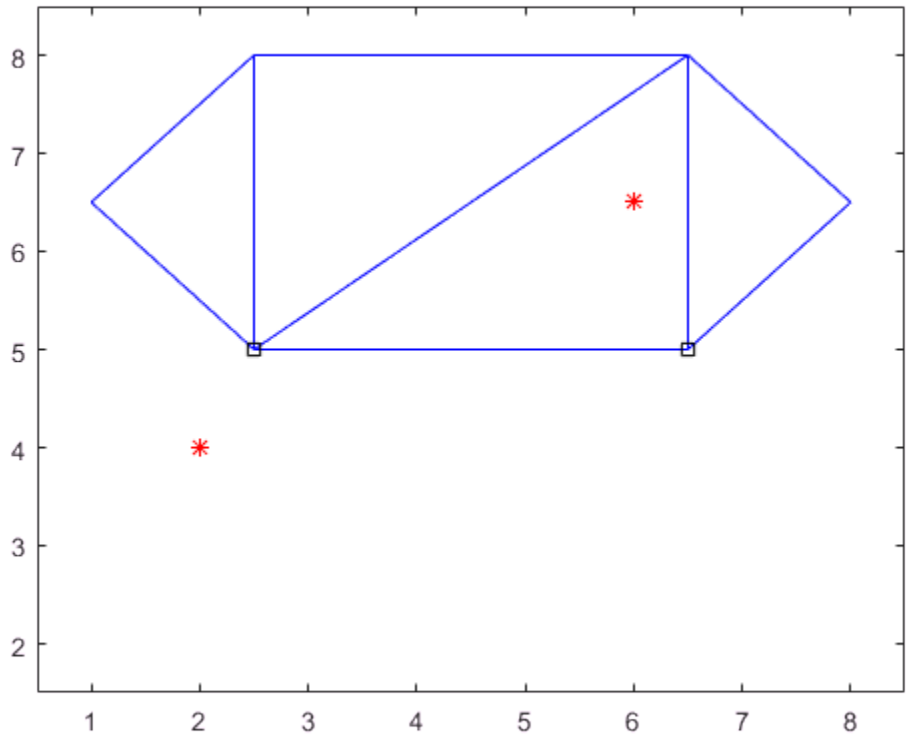

Examine the distance between each query point and its nearest neighbor.

```
d
```

```
d =

    1.1180
    1.5811
```

Locate Nearest Neighbors in 3-D Delaunay Triangulation

Create a 3-D Delaunay Triangulation.

```
P = [1 1 0; -1 1 0; -1 -1 0; 1 -1 0; 0 0 2; 0 0 0];
DT = delaunayTriangulation(P);
```

Plot the triangulation and a query point.

```
tri = DT(:,:);
trisurf(tri,P(:,1),P(:,2),P(:,3),'FaceAlpha',0.5)
hold on
QP = [0 -0.5 2];
plot3(QP(1),QP(2),QP(3),'r*')
```

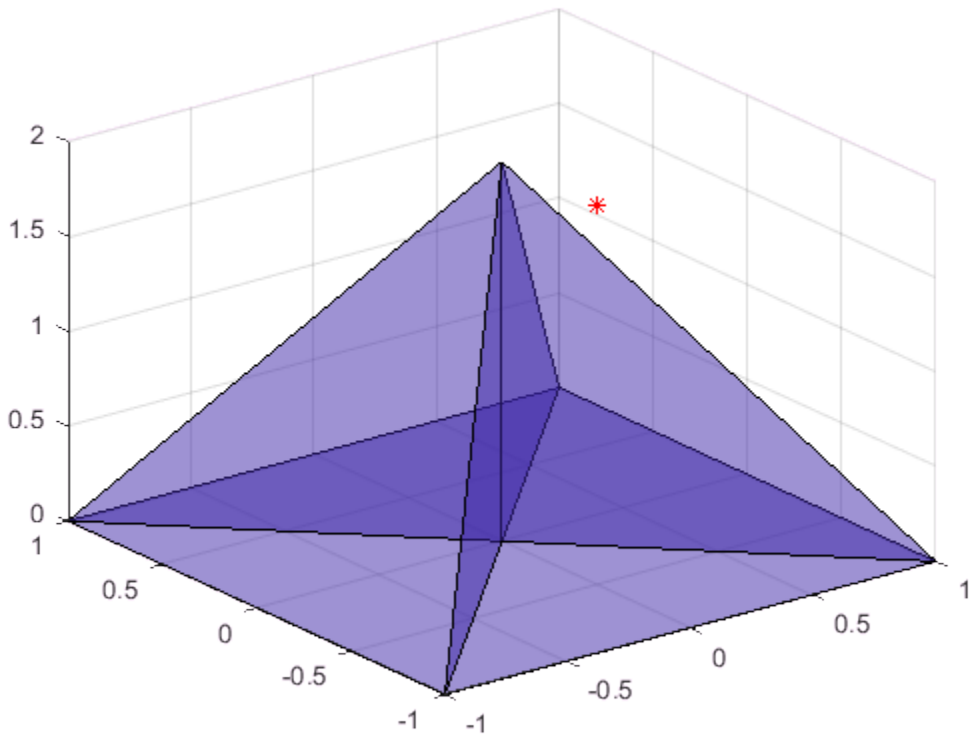

Find the coordinates for the nearest-neighbor of the query point.

```
nnVertexID = nearestNeighbor(DT,QP);
```

```
nnCoordinates = DT.Points(nnVertexID,:)
```

```
nnCoordinates =

     0     0     2
```

See Also

See Also

delaunayTriangulation | triangulation

Topics

"Spatial Searching"

neighbors

Class: triangulation

Neighbors to specified triangle or tetrahedron

Syntax

```
N = neighbors(TR,ti)
N = neighbors(TR)
```

Description

`N = neighbors(TR,ti)` returns the neighbors of the triangles or tetrahedra specified in `ti`.

`N = neighbors(TR)` returns the neighbors of all the triangles or tetrahedra.

Input Arguments

`TR`

Triangulation representation, see triangulation or delaunayTriangulation.

`ti`

Triangle or tetrahedron IDs, specified as a column vector.

Output Arguments

`TN`

IDs of the neighboring triangles or tetrahedra, returned as a matrix. The elements in `TN(i,:)` are the neighbors associated with `ti(i)`.

By convention, `TN(i,j)` is the neighbor opposite the `j`th vertex of `ti(i)`. If a triangle or tetrahedron has one or more boundary facets, the nonexistent neighbors are represented as `NaN` values in `TN`.

Examples

Query Neighbors in 2-D Delaunay Triangulation

Create a Delaunay triangulation from a set of random points.

```
x = gallery('uniformdata',[10,1],0);
y = gallery('uniformdata',[10,1],1);
DT = delaunayTriangulation(x,y);
```

Find the neighbors of the first triangle.

```
TN = neighbors(DT,1)
```

```
TN =

   NaN     4     5
```

The first triangle has a boundary edge and two neighbors.

Examine the vertex IDs of the first neighbor, `TN(2)`.

```
DT.ConnectivityList(TN(2),:)
```

```
ans =

     2     4     7
```

Query Neighbors in 3-D Triangulation

Create the Delaunay triangulation.

```
load tetmesh
TR = triangulation(tet,X);
```

Find the neighbors to each triangle in the triangulation.

```
TN = neighbors(TR);
```

Find the neighbors of the fifth tetrahedron.

```
TN(5,:)
```

```
ans =

        2360        1539           2        1851
```

Examine the vertex IDs of the first neighbor, `TN(1)`.

```
TR.ConnectivityList(TN(1),:)
```

```
ans =

        1093         891         893         858
```

Definitions

Triangle or Tetrahedron ID

A row number of the matrix, `TR.ConnectivityList`. Use this ID to refer a specific triangle or tetrahedron.

Vertex ID

A row number of the matrix, `TR.Points`. Use this ID to refer a specific vertex in the triangulation.

See Also

See Also

delaunayTriangulation | edgeAttachments

pointLocation

Class: triangulation

Triangle or tetrahedron containing specified point

Syntax

```
ti = pointLocation(T,QP)
ti = pointLocation(T,qx,qy)
ti = pointLocation(T,qx,qy,qz)
[ti,B] = pointLocation( ___ )
```

Description

`ti = pointLocation(T,QP)` returns the enclosing triangles or tetrahedra for each query point in `QP`. Each row in matrix `QP` contains the `x`, `y`, (and possibly `z`) coordinates of a query point.

`ti = pointLocation(T,qx,qy)` specifies the `x` and `y` coordinates of the query points in 2-D as separate column vectors.

`ti = pointLocation(T,qx,qy,qz)` specifies the `x`, `y`, and `z` coordinates of the query points in 3-D as separate column vectors.

`[ti,B] = pointLocation( ___ )` also returns the barycentric coordinates of each query point with respect to its enclosing triangle or tetrahedron. You can specify both output arguments with any of the previous syntaxes.

Input Arguments

`T` — Triangulation representation

`triangulation` object | `delaunayTriangulation` object

Triangulation representation, specified as a `triangulation` object or `delaunayTriangulation` object. For more information, see triangulation or delaunayTriangulation.

QP — Query points
matrix with 2 columns (2-D) | matrix with 3 columns (3-D)

Query points, specified as a matrix with 2 or 3 columns. `QP` contains the `x`, `y`, (and possibly `z`) coordinates of the query points.

qx — Query point x-coordinates
column vector

Query point x-coordinates, specified as a column vector.

qy — Query point y-coordinates
column vector

Query point y-coordinates, specified as a column vector.

qz — Query point z-coordinates
column vector

Query point z-coordinates, specified as a column vector.

Output Arguments

ti — IDs of enclosing triangles or tetrahedra
column vector

IDs of the enclosing triangles or tetrahedra, returned as a column vector. The values in `ti` correspond to the row numbers of the triangulation connectivity matrix `T.ConnectivityList`. For a query point `QP(k,:)`, the triangle or tetrahedron enclosing the point is `ti(k)`. If a query point lies on the boundary of two or more triangles or tetrahedra, then the largest ID is returned.

`ti` contains `NaN` values for points that are not located in a triangle or tetrahedron of the triangulation, `T`.

B — Barycentric coordinates
matrix

Barycentric coordinates, returned as a matrix. The values at `B(j,:)` are the barycentric coordinates of the `j`th query point `QP(j,:)` with respect to `ti(j)`.

Examples

Find Enclosing Triangles of Query Points

Define the points and connectivity of the triangulation.

```
P = [2.5 8.0; 6.5 8.0; 2.5 5.0; 6.5 5.0; 1.0 6.5; 8.0 6.5];
T = [5 3 1; 3 2 1; 3 4 2; 4 6 2];
TR = triangulation(T,P);
```

Define two query points.

```
QP = [2.25 7; 6 6.5];
```

Plot the triangulation and the query points.

```
triplot(TR)
hold on
plot(QP(:,1),QP(:,2),'r*')
ylim([4 9])
xlim([0 9])
```

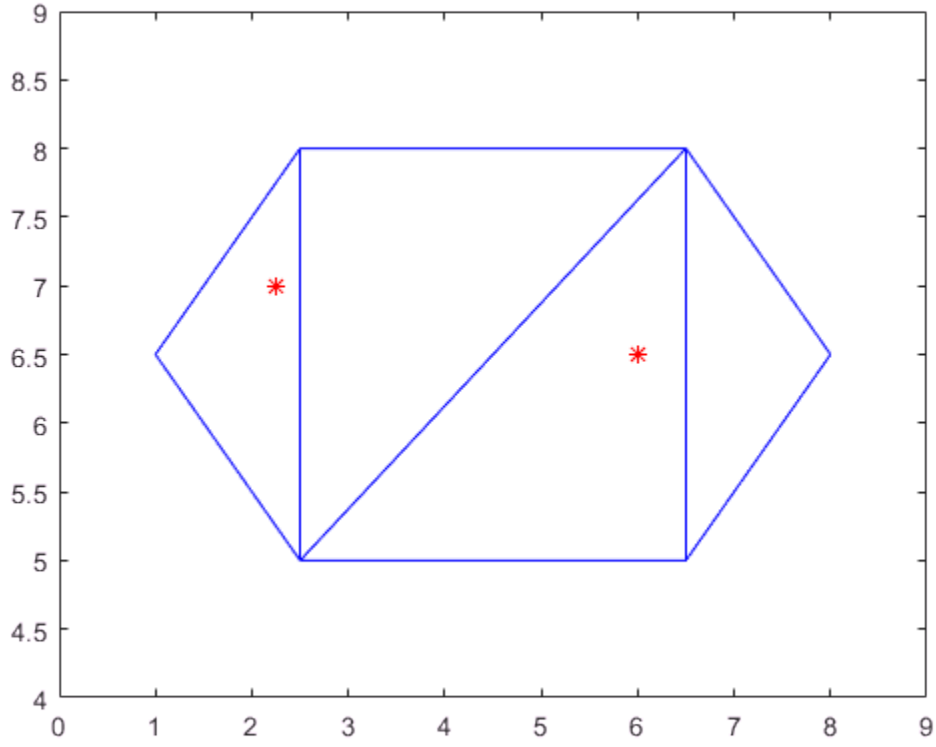

Determine which triangles in the triangulation enclose each query point.

```
ti = pointLocation(TR,QP)
```

```
ti =

     1
     3
```

Highlight the triangles that enclose each of the query points.

```
triplot(TR.ConnectivityList(ti,:),P(:,1),P(:,2),'c')
```

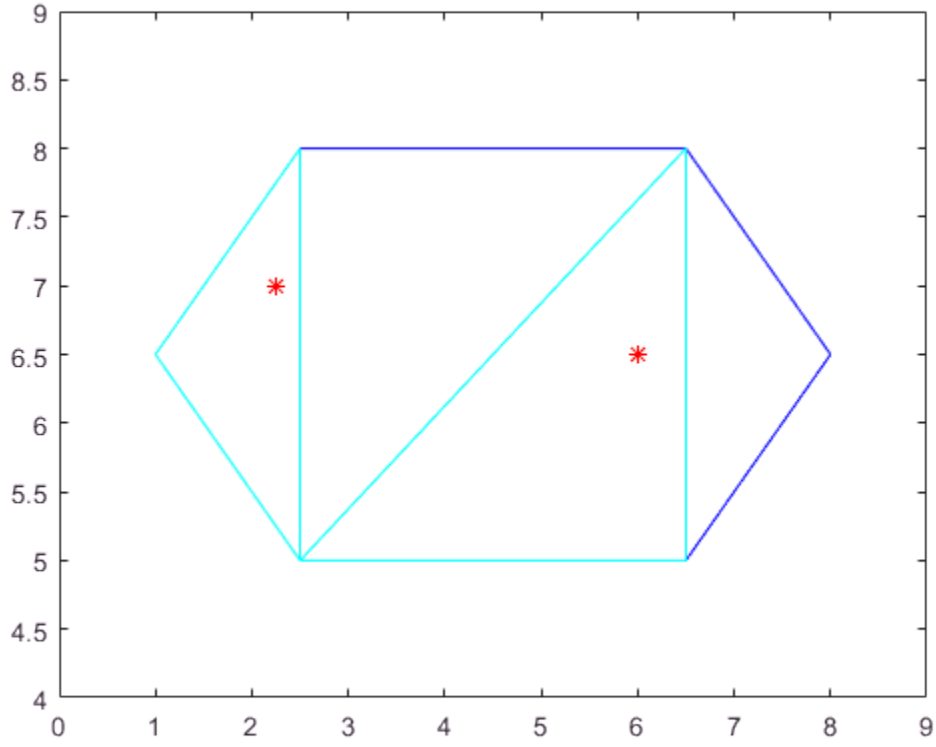

Find Enclosing Tetrahedra and Barycentric Coordinates in 3-D

Create a 3-D Delaunay triangulation from a set of random points.

```
x = gallery('uniformdata',[20 1],0);
y = gallery('uniformdata',[20 1],1);
z = gallery('uniformdata',[20 1],2);
DT = delaunayTriangulation(x,y,z);
```

Find the tetrahedra that enclose the query points and calculate the barycentric coordinates of the query points.

```
QP = [0.7 0.6 0.3; 0.5 0.5 0.5];
```

```
[ti,B] = pointLocation(DT,QP)
```

```
ti =

    57
    56


B =

    0.2796    0.0184    0.5286    0.1734
    0.3687    0.0149    0.5343    0.0821
```

See Also

See Also

delaunayTriangulation | triangulation

Topics

"Spatial Searching"

size

Class: triangulation

Size of triangulation connectivity list

Syntax

```
sz = size(TR)
```

Description

`sz = size(TR)` returns the size the triangulation connectivity list.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

Output Arguments

sz

Size of connectivity list, returned as a two-element row vector. The first element, `sz(1)` is the number of triangles or tetrahedra in the triangulation, and `sz(2)` is the number of vertices per triangle or tetrahedron.

Examples

Size of 2-D Triangulation

Create a triangulation.

```
P = [ 2.5    8.0
      6.5    8.0
      2.5    5.0
      6.5    5.0
      1.0    6.5
      8.0    6.5];

T = [5  3  1;
     3  2  1;
     3  4  2;
     4  6  2];

TR = triangulation(T,P);
```

Get the size of the connectivity list.

```
size(TR)
```

```
ans =

     4     3
```

The triangulation has 4 triangles, and each triangle has 3 vertices.

See Also

See Also

delaunayTriangulation | `size`

vertexAttachments

Class: triangulation

Triangles or tetrahedra attached to specified vertex

Syntax

```
ti = vertexAttachments(TR,vi)
ti = vertexAttachments(TR)
```

Description

`ti = vertexAttachments(TR,vi)` returns the triangles or tetrahedra attached to the specified vertices, `vi`.

`ti = vertexAttachments(TR)` returns the triangles or tetrahedra attached to every vertex in the triangulation.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

vi

Query vertices, specified as a column vector of vertex IDs.

Output Arguments

ti

IDs of the triangles or tetrahedra attached to the vertices, returned as an `m`-by-`1` cell array. Each cell in `ti` contains the IDs of the attached triangles or tetrahedra. `ti{j}`

contains the attachments to the vertex, `vi(j)`. The attachments are returned in a cell array because the number of triangles or tetrahedra associated with each vertex can vary.

Examples

Attachments to Specific Vertex in 2-D Delaunay Triangulation

Locate and plot the attachments to a specific vertex.

Create a Delaunay triangulation from a set of random points.

```
x = gallery('uniformdata',[20,1],0);
y = gallery('uniformdata',[20,1],1);
DT = delaunayTriangulation(x,y);
```

Find the triangles attached to the fifth vertex.

```
ti = vertexAttachments(DT,5);
ti{:}
```

```
ans =

    18    23    21    22
```

Plot the triangulation. Plot the triangles attached to vertex 5 in red.

```
triplot(DT)
hold on

triplot(DT(ti{:},:),x,y,'Color','r')  % vertex 5 (in red)
hold off
```

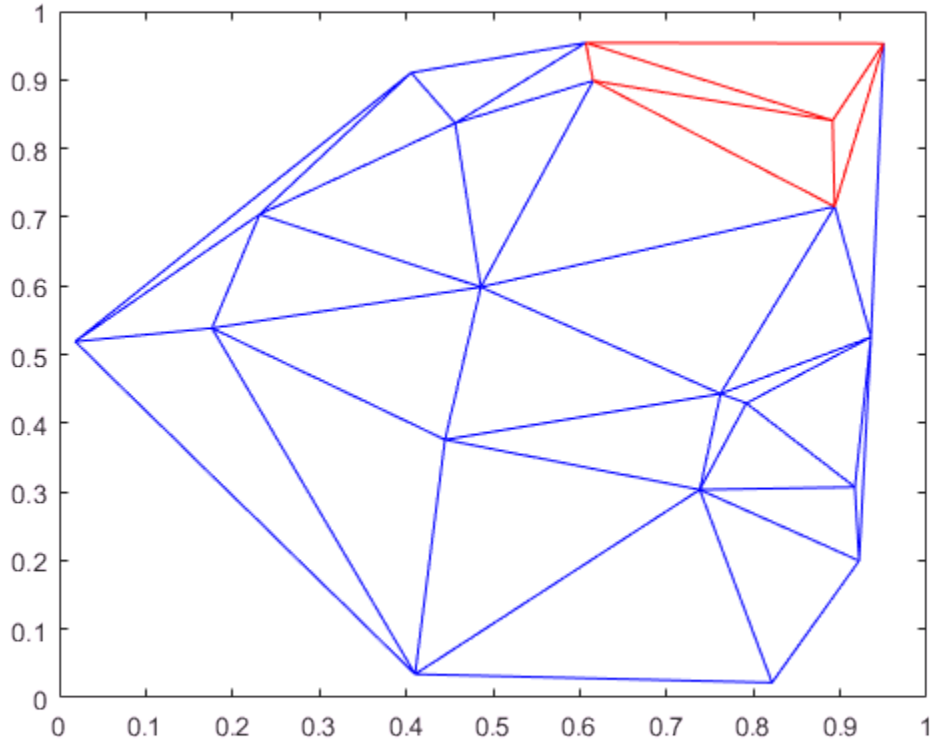

Definitions

Triangle or Tetrahedron ID

A row number of the matrix, `TR.ConnectivityList`. Use this ID to refer a specific triangle or tetrahedron.

Vertex ID

A row number of the matrix, `TR.Points`. Use this ID to refer a specific vertex in the triangulation.

See Also

See Also

delaunayTriangulation | edgeAttachments

vertexNormal

Class: triangulation

Triangulation vertex normal

Syntax

```
VN = vertexNormal(TR,vi)
VN = vertexNormal(TR)
```

Description

`VN = vertexNormal(TR,vi)` returns the unit normal vector to each of the specified vertices in `vi`.

`VN = vertexNormal(TR)` returns the normal information for all vertices in the triangulation.

Input Arguments

TR

Triangulation representation, see triangulation or delaunayTriangulation.

vi

IDs of vertices to query, specified as a column vector. Each element in `vi` is a "Vertex ID" on page 1-9771.

Output Arguments

VN

Vertex normals, returned a matrix. Each row, `VN(j,:)`, is the unit normal vector at the vertex `vi(j)`. The vector at `VN(j,:)` is the average unit normal of the faces attached to vertex `vi(j)`.

If you do not specify `vi`, then `vertexNormal` returns the unit normal information for all vertices in the triangulation. In this case, the normal associated with `TR.Points(j,:)` is `VN(j,:)`.

Examples

Unit Normal Vectors to the Surface of a Cube

Create a 3-D triangulation representing the volume of a cube.

```
[X,Y,Z] = meshgrid(1:4);
X = X(:);
Y = Y(:);
Z = Z(:);
dt = delaunayTriangulation(X,Y,Z);
```

Find the surfaces of the cube and isolate them in a 2-D triangulation.

```
[Tfb,Xfb] = freeBoundary(dt);
TR = triangulation(Tfb,Xfb);
```

Find the unit normal vectors to the triangles on the surface of the cube.

```
vn = vertexNormal(TR);
```

Plot the results.

```
trisurf(TR,'FaceColor', [0.8 0.8 1.0]);
axis equal
hold on
quiver3(Xfb(:,1),Xfb(:,2),Xfb(:,3),...
     vn(:,1),vn(:,2),vn(:,3),0.5,'color','b');
hold off
```

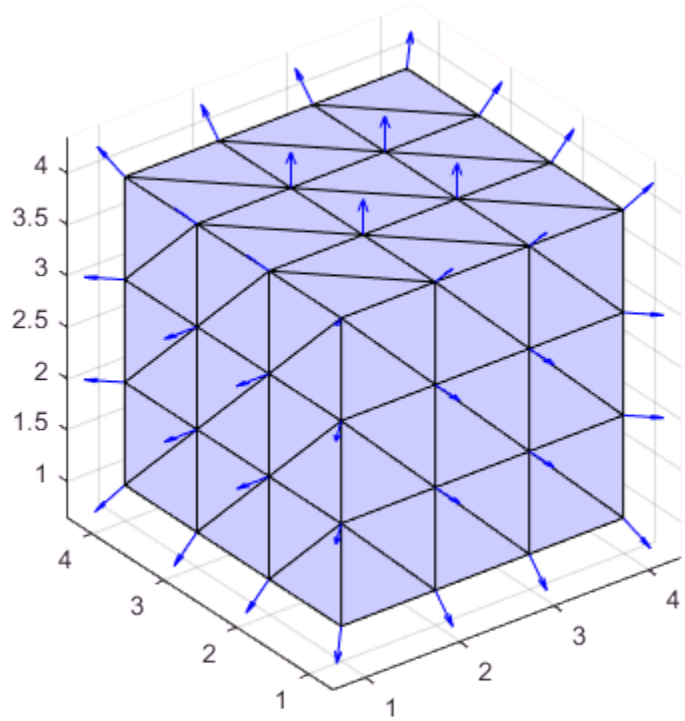

Definitions

Vertex ID

A row number of the matrix, `TR.Points`. Use this ID to refer a specific vertex in the triangulation.

See Also

See Also

delaunayTriangulation | freeBoundary

readtable

Create table from file

Syntax

```
T = readtable(filename)
T = readtable(filename,Name,Value)
T = readtable(filename,opts)
T = readtable(filename,opts,Name,Value)
```

Description

`T = readtable(filename)` creates a table by reading column oriented data from a file.

`readtable` determines the file format from the file extension:

- `.txt`, `.dat`, or `.csv` for delimited text files
- `.xls`, `.xlsb`, `.xlsm`, `.xlsx`, `.xltm`, `.xltx`, or `.ods` for spreadsheet files

`readtable` creates one variable in `T` for each column in the file and reads variable names from the first row of the file. By default, the variables created are `double` when the entire column is numeric, or cell arrays of character vectors when any element in a column is not numeric.

`T = readtable(filename,Name,Value)` creates a table from a file with additional options specified by one or more name-value pair arguments.

For example, you can specify whether `readtable` reads the first row of the file as variable names or as data.

`T = readtable(filename,opts)` creates a table using the import options `opts`.

`T = readtable(filename,opts,Name,Value)` creates a table using the import options and with additional options specified by one or more of these name-value pair

arguments: `ReadVariableNames`, `ReadRowNames`, `DateLocale`, `Encoding`, `Sheet`, and `Basic`.

Examples

Create Table from Text File

Load the file `myCsvTable.dat` and preview its contents in a text editor. A screen shot is shown below. Notice that the file contains comma-separated column oriented data.

```
filename = fullfile(matlabroot,'examples','matlab','myCsvTable.dat');
```

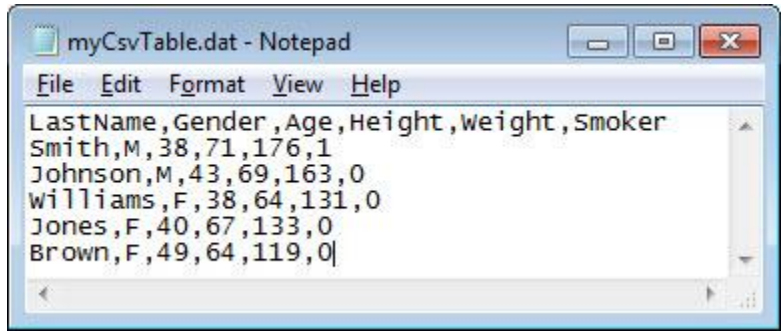

Create a table from the comma-separated text file. The resulting table `T` contains one variable for each column in the file and `readtable` treats the entries in the first line of the file as variable names.

```
T = readtable(filename)
```

```
T = 5×6 table
     LastName      Gender    Age    Height    Weight    Smoker
    __________     ______    ___    ______    ______    ______

    'Smith'        'M'       38     71        176       1
    'Johnson'      'M'       43     69        163       0
    'Williams'     'F'       38     64        131       0
    'Jones'        'F'       40     67        133       0
    'Brown'        'F'       49     64        119       0
```

Create Table from Text File without Column Headings

Load the file `mySpaceDelimTable.txt` and preview its contents in a text editor. A screen shot is shown below. Notice that the file contains space delimited, column oriented data.

```
filename = fullfile(matlabroot,'examples','matlab','mySpaceDelimTable.txt');
```

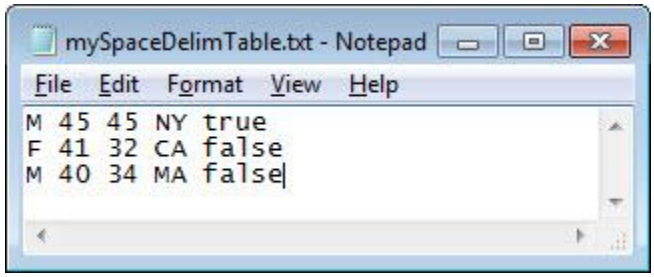

Create a table from the space delimited text file that does not contain variable names as column headings.

```
T = readtable(filename,...
    'Delimiter',' ','ReadVariableNames',false)
```

```
T = 3×5 table
    Var1    Var2    Var3    Var4     Var5
    ____    ____    ____    ____    _______

    'M'     45      45      'NY'    'true'
    'F'     41      32      'CA'    'false'
    'M'     40      34      'MA'    'false'
```

`T` contains default variable names.

Create and Format Table from Text File

Load the file `myCsvTable.dat` and preview its contents in a text editor. A screen shot is shown below. Notice that the file contains comma-separated column oriented data.

```
filename = fullfile(matlabroot,'examples','matlab','myCsvTable.dat');
```

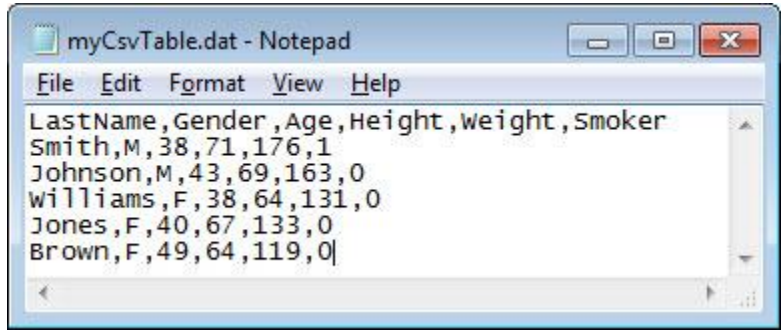

Create a table from the comma-separated text file. Import the first two columns as character vectors, the third column as `uint32`, and the next two columns as double-precision, floating-point numbers. Import the entries of the last column as character vectors.

```
T = readtable(filename,'Format','%s%s%u%f%f%s')
```

```
T = 5×6 table
     LastName      Gender    Age    Height    Weight    Smoker
    __________     ______    ___    ______    ______    ______

    'Smith'        'M'       38     71        176       '1'
    'Johnson'      'M'       43     69        163       '0'
    'Williams'     'F'       38     64        131       '0'
    'Jones'        'F'       40     67        133       '0'
    'Brown'        'F'       49     64        119       '0'
```

The conversion specifiers are `%s` for a cell array of character vectors, `%f` for `double`, and `%u` for `uint32`.

Read Foreign-Language Dates from Text File

Read German dates from a file and add them to a table as English dates.

Load the file `german_dates.txt` and preview its contents in a text editor. A screen shot is shown below. Notice that the first column of values contains dates in German and the second and third columns are numeric values.

```
filename = fullfile(matlabroot,'examples','matlab','german_dates.txt');
```

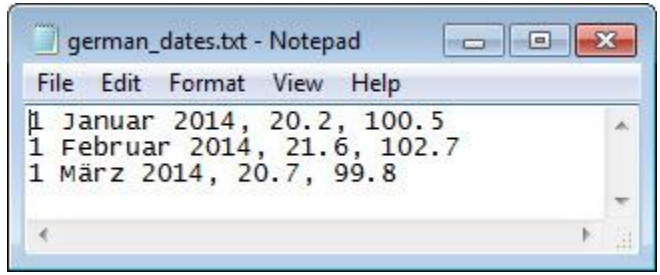

Read the sample file using `readtable`. The conversion specifiers is `%D` dates and `%f` for floating-point values. Specify the file encoding using the `FileEncoding` name-value pair argument. Specify the format and locale of the dates using the `DateLocale` name-value pair argument.

```
T = readtable(filename,'ReadVariableNames',false,...
    'Format','%{dd MMMM yyyy}D %f %f',...
    'FileEncoding','ISO-8859-15',...
    'DateLocale','de_DE')
```

```
T = 3×3 table
          Var1           Var2    Var3
    ________________     ____    _____

    01 January 2014      20.2    100.5
    01 February 2014     21.6    102.7
    01 March 2014        20.7     99.8
```

Create Table from Spreadsheet Including Row Names

Create a table from a spreadsheet that contains variable names in the first row and row names in the first column.

```
T = readtable('patients.xls','ReadRowNames',true);
```

Display the first five rows and first four variables of the table.

```
T(1:5,1:4)
```

```
ans = 5×4 table
                  Gender     Age              Location              Height
```

```
                 ________    ___    ___________________________    _______

    Smith        'Male'      38     'County General Hospital'      71
    Johnson      'Male'      43     'VA Hospital'                  69
    Williams     'Female'    38     'St. Mary's Medical Center'    64
    Jones        'Female'    40     'VA Hospital'                  67
    Brown        'Female'    49     'County General Hospital'      64
```

View the `DimensionNames` property of the table.

```
T.Properties.DimensionNames
```

```
ans = 1×2 cell array
    'LastName'    'Variables'
```

`'LastName'` is the name in the first column of the first row of the spreadsheet.

Read Specific Range of Data from Spreadsheet

Create a table using data from a specified region of the spreadsheet `patients.xls`. Use the data from the 5-by-3 rectangular region between the corners `C2` and `E6`. Do not use the first row of this region as variable names.

```
T = readtable('patients.xls',...
    'Range','C2:E6',...
    'ReadVariableNames',false)
```

```
T =

    Var1                Var2                Var3
    ____    ___________________________    ____

    38      'County General Hospital'      71
    43      'VA Hospital'                  69
    38      'St. Mary's Medical Center'    64
    40      'VA Hospital'                  67
    49      'County General Hospital'      64
```

T contains default variable names.

Create and Use Import Options for Text Files

Create import options, tailor the data types for multiple variables, and then read the data.

Create an import options object from a text file.

```
opts = detectImportOptions('airlinesmall.csv')
```

```
opts 
  DelimitedTextImportOptions with properties:

   Format Properties:
                    Delimiter: {','}
                   Whitespace: '\b\t '
                   LineEnding: {'\n'  '\r'  '\r\n'}
                CommentStyle: {}
    ConsecutiveDelimitersRule: 'split'
        LeadingDelimitersRule: 'keep'
                EmptyLineRule: 'skip'
                     Encoding: 'windows-1252'

   Replacement Properties:
                  MissingRule: 'fill'
              ImportErrorRule: 'fill'
             ExtraColumnsRule: 'addvars'

   Variable Import Properties:  Set types by name using setvartype
                VariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
                VariableTypes: {'double', 'double', 'double' ... and 26 more}
        SelectedVariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
              VariableOptions: Show all 29 VariableOptions
 Access VariableOptions sub-properties using setvaropts/getvaropts

   Location Properties:
                     DataLine: 2
            VariableNamesLine: 1
               RowNamesColumn: 0
            VariableUnitsLine: 0
     VariableDescriptionsLine: 0
```

Examine the `Type` property of variables `TaxiIn` and `TaxiOut`.

```
getvaropts(opts,{'TaxiIn','TaxiOut'})
```

```
ans =
  1×2 TextVariableImportOptions array with properties:

    WhitespaceRule
    Type
    FillValue
    Name
    QuoteRule
    TreatAsMissing
```

Change the type of the variables `TaxiIn` and `TaxiOut` to `double`.

```
 opts = setvartype(opts,{'TaxiIn','TaxiOut'},'double');
```

Specify the subset of variables to import and examine.

```
opts.SelectedVariableNames = {'TaxiIn','TaxiOut'};
```

Use the `readtable` function along with the options object to import the selected variables. Display a summary of the table.

```
T = readtable('airlinesmall.csv',opts);
summary(T)
```

```
Variables:

    TaxiIn: 123523×1 double

        Values:

            Min             0
            Median          5
            Max             1451
            NumMissing      37383

    TaxiOut: 123523×1 double

        Values:

            Min             0
            Median          13
            Max             755
```

```
            NumMissing     37364
```

Create and Use Import Options for Spreadsheet Files

Create import options for a spreadsheet file, specify the variables to import, and then read the data.

Create an import options object from a file.

```
opts = detectImportOptions('patients.xls')
```

```
opts = 
  SpreadsheetImportOptions with properties:

   Sheet Properties:
                        Sheet: ''

   Replacement Properties:
                  MissingRule: 'fill'
              ImportErrorRule: 'fill'

   Variable Import Properties:  Set types by name using setvartype
                VariableNames: {'LastName', 'Gender', 'Age' ... and 7 more}
                VariableTypes: {'char', 'char', 'double' ... and 7 more}
         SelectedVariableNames: {'LastName', 'Gender', 'Age' ... and 7 more}
               VariableOptions: Show all 10 VariableOptions
 Access VariableOptions sub-properties using setvaropts/getvaropts

   Range Properties:
                   DataRange: 'A2' (Start Cell)
           VariableNamesRange: 'A1'
                RowNamesRange: ''
           VariableUnitsRange: ''
    VariableDescriptionsRange: ''
```

Modify the options object to specify which variables to import.

```
opts.SelectedVariableNames = {'Systolic','Diastolic'};
```

Use `readtable` along with the options object to import the specified variables.

```
T = readtable('patients.xls',opts);
summary(T)
```

```
Variables:

    Systolic: 100×1 double

        Values:

            Min       109
            Median    122
            Max       138

    Diastolic: 100×1 double

        Values:

            Min         68
            Median    81.5
            Max         99
```

- "Access Data in a Table"

Input Arguments

`filename` — Name of file to read

character vector | string

Name of the file to read, specified as a character vector or a string. If `filename` includes the file extension, then `readtable` determines the file format from the extension. Otherwise, you must specify the `'FileType'` name-value pair arguments to indicate the type of file.

On Windows systems with Microsoft Excel software, `readtable` reads any Excel spreadsheet file format recognized by your version of Excel. If your system does not have Excel for Windows, `readtable` operates in `basic` import mode, and reads only `.xls, .xlsx, .xlsm, .xltx, and .xltm` files.

For a delimited text file, `readtable` converts empty fields in the file to either `NaN` (for a numeric variable) or an empty character vector (for a text variable). All lines in the text file must have the same number of delimiters. `readtable` ignores insignificant white space in the file.

Example: `'myFile.xlsx'` or `"myFile.xlsx"`

Data Types: `char` | `string`

`opts` — File import options
`SpreadsheetImportOptions` | `DelimitedtextImportOptions` | `FixedWidthImportOptions`

File import options, specified as an `SpreadsheetImportOptions`, `DelimitedTextImportOptions` or `FixedWidthImportOptions` object created by the `detectImportOptions` function. The `opts` object contains properties that control the data import process. For more information on the properties of each object, see the appropriate object page.

Type of Files	Output
Spreadsheet files	`SpreadsheetImportOptions` object
Text files	`DelimitedTextImportOptions` object
Fixed-width text files	`FixedWidthImportOptions` object

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'ReadVariableNames',false` indicates that the first row of the file does not correspond to variable names.

When reading:

- Text files, only these parameter names apply: `FileType`, `ReadVariableNames`, `ReadRowNames`, `TreatAsEmpty`, `DatetimeType`, `Delimiter`, `HeaderLines`, `Format`, `EmptyValue`, `MultipleDelimsAsOne`, `CollectOutput`, `CommentStyle`, `ExpChars`, `EndOfLine`, `DateLocale`, and `Encoding`.
- Spreadsheet files, only these parameter names apply: `FileType`, `ReadVariableNames`, `ReadRowNames`, `TreatAsEmpty`, `DatetimeType`, `Sheet`, `Range`, `Basic`, and `TextType`.
- Text or Spreadsheet files with the `opts` import options, only these parameter names apply: `ReadVariableNames`, `ReadRowNames`, `DatetLocale`, `Encoding`, `Sheet`, and `Basic`.

Text and Spreadsheet Files

`'FileType'` — Type of file
`'text'` | `'spreadsheet'`

Type of file, specified as the comma-separated pair consisting of `'FileType'` and a character vector or string containing `'text'` or `'spreadsheet'`.

Specify the `'FileType'` name-value pair argument when the `filename` does not include the file extension or if the extension is other than one of the following.

- `.txt`, `.dat`, or `.csv` for delimited text files
- `.xls`, `.xlsb`, `.xlsm`, `.xlsx`, `.xltm`, `.xltx`, or `.ods` for spreadsheet files

Example: `'FileType','text'`

Example: `'FileType',"text"`

Data Types: `char` | `string`

`'ReadVariableNames'` — Read first row as variable names
`true` | `false` | `1` | `0`

Indicator for reading the first row as variable names, specified as the comma-separated pair consisting of `'ReadVariableNames'` and either `true`, `false`, `1`, or `0`. If unspecified, `readtable` automatically detects the presence of variable names.

Indicator	Description
`true`	Use when the first row of the region to read contains the variable names for the table. `readtable` creates a variable, with the detected variable name, for each column in `T`.
`false`	Use when the first row of the region to read contains data in the table. `readtable` creates default variable names of the form `'Var1',...,'VarN'`, where `N` is the number of variables.
unspecified	When left unspecified, `readtable` automatically detects `true` or `false` and proceeds accordingly.

Note: If both the `'ReadVariableNames'` and `'ReadRowNames'` logical indicators are `true`, then `readtable` saves the name in the first column of the first row of the region to read as the first dimension name in the property, `T.Properties.DimensionNames`.

If you specify the `ReadVariableNames` argument in addition to `opts` the import options, then the `readtable` behavior changes based on the specification:

- If `ReadVariableNames` is `true`, then read the variable names from the specified file by using the `VariableNamesRange` or the `VariableNamesLine` property of the import options object.
- If `ReadVariableNames` is `false`, then read the variable names from the `VariableNames` property of the import options object.

`'ReadRowNames'` — Indicator for reading the first column as row names
`false` (default) | `true` | `0` | `1`

Indicator for reading first column as row names, specified as the comma-separated pair consisting of `'ReadRowNames'` and either `false`, `true`, `0`, or `1`.

Indicator	Description
`false`	Use when the first column of the region to read contains data, and not the row names for the table.
`true`	Use when the first column of the region to read contains the row names for the table.
unspecified	When left unspecified, `readtable` assumes `false`.

Note: If both the `'ReadVariableNames'` and `'ReadRowNames'` logical indicators are `true`, then `readtable` saves the name in the first column of the first row of the region to read as the first dimension name in the property, `T.Properties.DimensionNames`.

If you specify the `ReadRowNames` argument in addition to `opts` the import options , then the `readtable` behavior changes based on the specification:

- If `ReadRowNames` is `true`, then read the row names from the specified file by using the `RowNamesRange` or the `RowNameColumn` property of the import options object.
- If `ReadRowNames` is `false`, then do not import row names.

`'TreatAsEmpty'` — Placeholder text to treat as empty value
character vector | cell array of character vectors | string | string array

Placeholder text to treat as an empty value, specified as the comma-separated pair consisting of `'TreatAsEmpty'` and a character vector, cell array of character vectors, string, or string array. Table elements corresponding to these characters are set to `NaN`.

`'TreatAsEmpty'` only applies to numeric columns in the file, and `readtable` does not accept numeric literals, such as `'-99'`.

Example: `'TreatAsEmpty','N/A'` or `'TreatAsEmpty","N/A"` sets `N/A` within numeric columns to `NaN`.

Example: `'TreatAsEmpty',{'.','NA','N/A'}` or `'TreatAsEmpty',["."," NA","N/A"}`sets `.`, `NA` and `N/A` within numeric columns to `NaN`.

Data Types: `char` | `string`

`'TextType'` — Output data type of text

`'char'` (default) | `'string'`

Output data type of text, specified as the comma-separated pair consisting of `'TextType'` and the character vector or string containing `'char'` or `'string'`. If you specify the value `'char'`, then `readtable` returns text as a cell array of character vectors. If you specify the value `'string'`, then `readtable` returns text as an array of type `string`.

Data Types: `char` | `string`

`'DatetimeType'` — Type for imported date and time data

`'datetime'` (default) | `'text'` | `'exceldatenum'` (spreadsheet files only)

Type for imported date and time data, specified as the comma-separated pair consisting of `'DatetimeType'` and one of these character vectors or strings: `'datetime'`, `'text'`, or `'exceldatenum'`. The value `'exceldatenum'` is applicable only for spreadsheet files, and is not valid for text files.

Value	Type for Imported Date and Time Data
`'datetime'`	MATLAB `datetime` data type For more information, see `datetime`.
`'text'`	If `'DatetimeType'` is specified as `'text'`, then the type for imported date and time data depends on the value specified in the `'TextType'` parameter: • If `'TextType'` is `'char'`, then `readtable` returns dates as a cell array of character vectors. • If `'TextType'` is `'string'`, then `readtable` returns dates as an array of strings.

Value	Type for Imported Date and Time Data
`'exceldatenum'`	Excel serial date numbers A serial date number is a single number equal to the number of days from a given reference date. Excel serial date numbers use a different reference date than MATLAB serial date numbers. For more information on Excel dates, see https://support.microsoft.com/en-us/kb/214330.

Example: `'DatetimeType','text'`

Example: `'DatetimeType',"datetime"`

Data Types: `char` | `string`

Text Files Only

`'Delimiter'` — Field delimiter character

character vector | string

Field delimiter character, specified as the comma-separated pair consisting of `'Delimiter'` and a character vector or a string containing one of the following specifiers.

Specifier	Field Delimiter

`','`
 	
`'comma'`
	Comma

`' '`
 	
`'space'`
	Space

`'\t'`
 	
`'tab'`
	Tab

`';'`
 	
`'semi'`
	Semicolon

`'|'`
 	
`'bar'`
	Vertical bar

Specifier	Field Delimiter
unspecified	If unspecified, `readtable` automatically detects the delimiter.

Example: `'Delimiter','space'`

Example: `'Delimiter',"space"`

Data Types: `char` | `string`

`'HeaderLines'` — Lines to skip
positive integer

Lines to skip at beginning of the file, specified as the comma-separated pair consisting of `'HeaderLines'` and a positive integer. If unspecified, `readtable` automatically detects the number of lines to skip.

Data Types: `single` | `double`

`'Format'` — Column format
character vector | string

Column format of the file, specified as the comma-separated pair consisting of `'Format'` and a character vector or a string of one or more conversion specifiers. The conversion specifiers are the same as the specifiers accepted by the `textscan` function.

Specifying the format can significantly improve speed for some large files. If you do not specify a value for `Format`, then `readtable` uses `%q` to interpret nonnumeric columns. The `%q` specifier reads the text and omits double quotation marks (`"`) if appropriate.

By default, the variables created are either `double` or cell array of character vectors, depending on the data. If the entire column is numeric, variables are imported as `double`. If any element in a column is not numeric, the variables are imported as cell arrays of character vectors.

Data Types: `char` | `string`

`'EmptyValue'` — Returned value for empty numeric fields
`NaN` (default) | scalar

Returned value for empty numeric fields in delimited text files, specified as the comma-separated pair consisting of `'EmptyValue'` and a scalar.

`'MultipleDelimsAsOne'` — Multiple delimiter handling

`0 (false)` (default) | `1 (true)`

Multiple delimiter handling, specified as the comma-separated pair consisting of `'MultipleDelimsAsOne'` and either `true` or `false`. If `true`, then the importing function treats consecutive delimiters as a single delimiter. Repeated delimiters separated by white-space are also treated as a single delimiter. You must also specify the `Delimiter` option.

Example: `'MultipleDelimsAsOne',1`

`'CollectOutput'` — Logical indicator determining data concatenation

`false` (default) | `true`

Logical indicator determining data concatenation, specified as the comma-separated pair consisting of `'CollectOutput'` and either `true` or `false`. If `true`, then the importing function concatenates consecutive output cells of the same fundamental MATLAB class into a single array.

`'CommentStyle'` — Symbols designating text to ignore

character vector | cell array of character vectors | string | string array

Symbols designating text to ignore, specified as the comma-separated pair consisting of `'CommentStyle'` and a character vector, cell array of character vectors, string, or string array.

For example, specify a character such as `'%'` to ignore text following the symbol on the same line. Specify a cell array of two character vectors, such as `{'/*', '*/'}`, to ignore any text between those sequences.

MATLAB checks for comments only at the start of each field, not within a field.

Example: `'CommentStyle',{'/*', '*/'}`

Example: `'CommentStyle',["/*", "*/"}`

Data Types: `char` | `string`

`'ExpChars'` — Exponent characters

`'eEdD'` (default) | character vector | string

Exponent characters, specified as the comma-separated pair consisting of `'ExpChars'` and a character vector or string. The default exponent characters are `e`, `E`, `d`, and `D`.

Data Types: `char` | `string`

`'EndOfLine'` — End-of-line characters

character vector | string

End-of-line characters, specified as the comma-separated pair consisting of `'EndOfLine'` and a character vector or string. The character vector must be `'\r\n'` or it must specify a single character. Common end-of-line characters are a newline character (`'\n'`) or a carriage return (`'\r'`). If you specify `'\r\n'`, then the importing function treats any of `\r`, `\n`, and the combination of the two (`\r\n`) as end-of-line characters.

The default end-of-line sequence is `\n`, `\r`, or `\r\n`, depending on the contents of your file.

If there are missing values and an end-of-line sequence at the end of the last line in a file, then the importing function returns empty values for those fields. This ensures that individual cells in output cell array, `C`, are the same size.

Example: `'EndOfLine',':'`

Example: `"EndOfLine",":"`

Data Types: `char` | `string`

`'DateLocale'` — Locale for reading dates

character vector | string

Locale for reading dates, specified as the comma-separated pair consisting of `'DateLocale'` and a character vector or a string of the form *`xx_YY`* where:

- *`YY`* is an uppercase ISO 3166-1 alpha-2 code indicating a country
- *`xx`* is a lowercase ISO 639-1 two-letter code indicating a language

For a list of common values for the locale, see the `Locale` name-value pair argument for the `datetime` function.

When using the `%D` format specifier to read text as `datetime` values, use `DateLocale` to specify the locale in which `readtable` should interpret month and day-of-week names and abbreviations.

If you specify the `DateLocale` argument in addition to `opts` the import options, then the `readtable` function uses the specified value for `DateLocale` argument, overriding the locale defined in the import options.

Example: `'DateLocale','ja_JP'`

Example: `'DateLocale',"ja_JP"`

`'Encoding'` — Character encoding scheme
`'UTF-8' | 'ISO-8859-1' | 'windows-1251' | 'windows-1252' | ...`

Character encoding scheme associated with the file, specified as the comma-separated pair consisting of `'Encoding'` and `'system'` or a standard character encoding scheme name like one of the values in this table. When you do not specify any encoding or specify encoding as `'system'`, the `readtable` function uses your system default encoding to read the file.

'Big5'	'ISO-8859-1'	'windows-847'
'Big5-HKSCS'	'ISO-8859-2'	'windows-949'
'CP949'	'ISO-8859-3'	'windows-1250'
'EUC-KR'	'ISO-8859-4'	'windows-1251'
'EUC-JP'	'ISO-8859-5'	'windows-1252'
'EUC-TW'	'ISO-8859-6'	'windows-1253'
'GB18030'	'ISO-8859-7'	'windows-1254'
'GB2312'	'ISO-8859-8'	'windows-1255'
'GBK'	'ISO-8859-9'	'windows-1256'
'IBM866'	'ISO-8859-11'	'windows-1257'
'KOI8-R'	'ISO-8859-13'	'windows-1258'
'KOI8-U'	'ISO-8859-15'	'US-ASCII'
	'Macintosh'	'UTF-8'
	'Shift_JIS'	

If you specify the `Encoding` argument in addition to `opts` the import options, then the `readtable` function uses the specified value for `Encoding` argument, overriding the encoding defined in the import options.

Example: `'Encoding', 'UTF-8'`

Example: `"Encoding", "UTF-8"`

Example: `'Encoding', 'system'` uses the system default encoding.

Data Types: `char` | `string`

Spreadsheet Files Only

`'Sheet'` — Worksheet to read

1 (default) | positive integer | character vector | string

Worksheet to read, specified as the comma-separated pair consisting of `'Sheet'` and a positive integer indicating the worksheet index or a character vector or string containing the worksheet name. The worksheet name cannot contain a colon (`:`). To determine the names of sheets in a spreadsheet file, use `[status,sheets] = xlsfinfo(filename)`. For more information, see `xlsfinfo`.

If you specify the `Sheet` argument in addition to `opts` the import options, then the `readtable` function uses the specified value for `Sheet` argument, overriding the sheet name defined in the import options.

Example: `'Sheet', 2`

Example: `'Sheet', 'MySheetName'`

Example: `'Sheet', "MySheetName"`

Data Types: `char` | `string` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'Range'` — Portion of worksheet to read

character vector | string

Portion of the worksheet to read, indicated as a rectangular area specified by a comma separated pair consisting of `'Range'` and a character vector or string in one of the following forms.

Ways to specify `Range`	Description
`'Corner1:Corner2'` Rectangular Range	Specify the range using the syntax `'Corner1:Corner2'`, where `Corner1` and `Corner2` are two opposing corners that define the region. For example, `'D2:H4'` represents the 3-by-5 rectangular region between the two corners `D2` and `H4` on the worksheet. The `'Range'` name-value pair argument is not case-sensitive, and uses Excel A1 reference style (see Excel help).

Ways to specify Range	Description
	Example: `'Range','Corner1:Corner2'`
`''` Unspecified or Empty	If unspecified, `readtable` automatically detects the used range. **Example:** `'Range',''` **Note:** *Used Range* refers to the rectangular portion of the spreadsheet that actually contains data. `readtable` automatically detects the used range by trimming any leading and trailing rows and columns that do not contain data. Text that is only white space is considered data and is captured within the used range.
`'Row1:Row2'` Row Range	You can identify range by specifying the beginning and ending rows using Excel row designators. Then `readtable` automatically detects the used column range within the designated rows. For instance, `readtable` interprets the range specification `'1:7'` as an instruction to read all columns in the used range in rows 1 through 7 (inclusive). **Example:** `'Range','1:7'`
`'Column1:Column2'` Column Range	You can identify range by specifying the beginning and ending columns using Excel column designators. Then `readtable` automatically detects the used row range within the designated columns. For instance, `readtable` interprets the range specification `'A:F'` as an instruction to read all rows in the used range in columns A through F (inclusive). **Example:** `'Range','A:F'`
`'NamedRange'` Excel's Named Range	In Excel, you can create names to identify ranges in the spreadsheet. For instance, you can select a rectangular portion of the spreadsheet and call it `'myTable'`. If such named ranges exist in a spreadsheet, then `readtable` can read that range using its name. **Example:** `'Range','myTable'`

Example: `'Range'`, `'A1:F10'`

Example: `'Range'`, `"A1:F10"`

Data Types: `char` | `string`

`'Basic'` — Indicator for reading in `basic` mode
`true` | `false` | `1` | `0`

Indicator for reading in `basic` mode, specified as the comma-separated pair consisting of `'Basic'` and either `true`, `false`, `1`, or `0`. On Windows without Excel, Mac, and Linux, the only value allowed is the default value `true`. When operating in this mode, `readtable` functionality differs in the support of file formats and interactive features, such as formulas and macros.

Basic	`false`	`true`
Supported file formats	`.xls, .xlsx, .xlsm, .xltx, .`	`.xls, .xlsx, .xlsm, .xltx, .xltm`
Support for interactive features, such as formulas and macros	Yes	No

Output Arguments

`T` — Output table
table

Output table, returned as a table. The table can store metadata such as descriptions, variable units, variable names, and row names. For more information, see Table Properties.

See Also

See Also
`detectImportOptions` | Import Tool | `table` | `textscan` | `writetable`

Topics

"Access Data in a Table"
"Ways to Import Text Files"
"Ways to Import Spreadsheets"

Introduced in R2013b

real

Real part of complex number

Syntax

```
X = real(Z)
```

Description

`X = real(Z)` returns the real part of the elements of the complex array `Z`.

Examples

Real Part of Complex Number

Compute the real part of the complex number, `Z`.

```
Z = 2+3*i;
X = real(Z)
```

```
X = 2
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`abs` | `angle` | `conj` | `i` | `j` | `imag`

Introduced before R2006a

reallog

Natural logarithm for nonnegative real arrays

Syntax

```
Y = reallog(X)
```

Description

`Y = reallog(X)` returns the natural logarithm of each element in array `X`. Array `X` must contain only nonnegative real numbers. The size of `Y` is the same as the size of `X`.

Examples

Natural Log of Matrix

Create a 4-by-4 matrix and compute the natural log of each element.

```
X = magic(4)
```

```
X =

    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1
```

```
Y = reallog(X)
```

```
Y =

    2.7726    0.6931    1.0986    2.5649
    1.6094    2.3979    2.3026    2.0794
    2.1972    1.9459    1.7918    2.4849
    1.3863    2.6391    2.7081         0
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`log` | `realpow` | `realsqrt`

Introduced before R2006a

realmax

Largest positive floating-point number

Syntax

```
n = realmax
```

Description

`n = realmax` returns the largest finite floating-point number in IEEE double precision.

`realmax('double')` is the same as `realmax` with no arguments.

`realmax('single')` returns the largest finite floating-point number in IEEE single precision.

Examples

Find the value of the constant `realmax`:

```
ndouble = realmax
nsingle = realmax('single')
```

```
ndouble =

  1.7977e+308


nsingle =

  3.4028e+38
```

Tutorials

- "Floating-Point Numbers"

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`intmax` | `eps` | `realmin`

Topics

"Floating-Point Numbers"

Introduced before R2006a

realmin

Smallest positive normalized floating-point number

Syntax

```
n = realmin
realmin('double')
realmin('single')
```

Description

`n = realmin` returns the smallest positive normalized floating-point number in IEEE double precision.

`realmin('double')` is the same as `realmin` with no arguments.

`realmin('single')` returns the smallest positive normalized floating-point number in IEEE single precision.

Examples

Find the value of the constant `realmin`:

```
ndouble = realmin
nsingle = realmin('single')
```

```
ndouble =

  2.2251e-308


nsingle =

  1.1755e-38
```

Tutorials

- "Floating-Point Numbers"

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`intmin` | `eps` | `realmax`

Topics

"Floating-Point Numbers"

Introduced before R2006a

realpow

Array power for real-only output

Syntax

```
Z = realpow(X,Y)
```

Description

`Z = realpow(X,Y)` raises each element of array `X` to the power of its corresponding element in array `Y`. Arrays `X` and `Y` must be the same size. The range of `realpow` is the set of all real numbers, i.e., all elements of the output array `Z` must be real.

Examples

Powers of Matrix Elements

Create a 3-by-3 matrix with the same value in each element.

```
X = -2*ones(3,3)
```

```
X =

    -2    -2    -2
    -2    -2    -2
    -2    -2    -2
```

Compute a 3-by-3 matrix of integer values.

```
Y = pascal(3)
```

```
Y =

     1     1     1
     1     2     3
     1     3     6
```

Compute the element-wise powers of the elements in X corresponding to the exponents defined in Y.

```
Z = realpow(X,Y)
```

```
Z =

    -2    -2    -2
    -2     4    -8
    -2    -8    64
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

mpower | power | reallog | realsqrt

Introduced before R2006a

realsqrt

Square root for nonnegative real arrays

Syntax

```
Y = realsqrt(X)
```

Description

`Y = realsqrt(X)` returns the square root of each element of array `X`. Array `X` must contain only nonnegative real numbers. The size of `Y` is the same as the size of `X`.

Examples

Square Root of Matrix Elements

Create a 4-by-4 matrix of real, positive values.

```
X = magic(4)
```

```
X =

    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1
```

Compute the square root of each element in `X`.

```
Y = realsqrt(X)
```

```
Y =

    4.0000    1.4142    1.7321    3.6056
    2.2361    3.3166    3.1623    2.8284
    3.0000    2.6458    2.4495    3.4641
```

```
    2.0000    3.7417    3.8730    1.0000
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`reallog` | `realpow` | `sqrt` | `sqrtm`

Introduced before R2006a

record

Record data and event information to file

Syntax

```
record(obj)
record(obj,'switch')
```

Description

`record(obj)` toggles the recording state for the serial port object, `obj`.

`record(obj,'switch')` initiates or terminates recording for `obj`. *`switch`* can be `on` or `off`. If *`switch`* is `on`, recording is initiated. If *`switch`* is `off`, recording is terminated.

Examples

This example creates the serial port object `s` on a Windows platform. It connects `s` to the device, configures `s` to record information to a file, writes and reads text data, and then disconnects `s` from the device.

```
s = serial('COM1');
fopen(s)
s.RecordDetail = 'verbose';
s.RecordName = 'MySerialFile.txt';
record(s,'on')
fprintf(s,'*IDN?')
out = fscanf(s);
record(s,'off')
fclose(s)
```

Tips

Before you can record information to disk, `obj` must be connected to the device with the `fopen` function. A connected serial port object has a `Status` property value of `open`. An

error is returned if you attempt to record information while `obj` is not connected to the device. Each serial port object must record information to a separate file. Recording is automatically terminated when `obj` is disconnected from the device with `fclose`.

The `RecordName` and `RecordMode` properties are read-only while `obj` is recording, and must be configured before using `record`.

For a detailed description of the record file format and the properties associated with recording data and event information to a file, refer to Debugging: Recording Information to Disk.

See Also

`fclose` | `fopen` | `RecordDetail` | `RecordMode` | `RecordName` | `RecordStatus` | `Status`

Introduced before R2006a

record

Record audio to `audiorecorder` object

Syntax

```
record(recorderObj)
record(recorderObj, length)
```

Description

`record(recorderObj)` records audio from an input device, such as a microphone connected to your system. *`recorderObj`* is an `audiorecorder` object that defines the sample rate, bit depth, and other properties of the recording.

`record(recorderObj, length)` records for the number of seconds specified by *`length`*.

Examples

Record 5 seconds of your speech with a microphone:

```
myVoice = audiorecorder;

% Define callbacks to show when
% recording starts and completes.
myVoice.StartFcn = 'disp(''Start speaking.'')';
myVoice.StopFcn = 'disp(''End of recording.'')';

record(myVoice, 5);
```

To listen to the recording, call the `play` method:

```
play(myVoice);
```

See Also

`audiorecorder` | getaudiodata | recordblocking

Topics

"Record Audio"
"Record or Play Audio within a Function"

recordblocking

Record audio to `audiorecorder` object, holding control until recording completes

Syntax

`recordblocking(recorderObj, length)`

Description

`recordblocking(recorderObj, length)` records audio from an input device, such as a microphone connected to your system, for the number of seconds specified by *`length`*. The `recordblocking` method does not return control until recording completes. *`recorderObj`* is an `audiorecorder` object that defines the sample rate, bit depth, and other properties of the recording.

Examples

Record 5 seconds of your speech with a microphone, and play it back:

```
myVoice = audiorecorder;

disp('Start speaking.');
recordblocking(myVoice, 5);
disp('End of recording. Playing back ...');

play(myVoice);
```

See Also

`audiorecorder` | record | getaudiodata

Topics

"Record Audio"

rectangle

Create rectangle with sharp or curved corners

Syntax

```
rectangle('Position',pos)
rectangle('Position',pos,'Curvature',cur)
rectangle( ___ ,Name,Value)
rectangle(ax, ___ )
r = rectangle( ___ )
```

Description

`rectangle('Position',pos)` creates a rectangle in 2-D coordinates. Specify `pos` as a four-element vector of the form `[x y w h]` in data units. The `x` and `y` elements determine the location and the `w` and `h` elements determine the size. The function plots into the current axes without clearing existing content from the axes.

`rectangle('Position',pos,'Curvature',cur)` adds curvature to the sides of the rectangle. For different curvatures along the horizontal and vertical sides, specify `cur` as a two-element vector of the form `[horizontal vertical]`. For the same length of curvature along all sides, specify `cur` as a scalar value. Specify values between 0 (no curvature) and 1 (maximum curvature). Use `[1 1]` to create an ellipse or circle.

`rectangle( ___ ,Name,Value)` specifies rectangle properties using one or more name-value pair arguments. For example, `'FaceColor','red'` specifies a red fill color. You can specify rectangle properties with any of the input argument combinations in the previous syntaxes.

`rectangle(ax, ___ )` creates the rectangle in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`r = rectangle( ___ )` returns the rectangle object. Use `r` to modify properties of the rectangle after it is created. For a list of properties, see Rectangle Properties. You can return an output argument with any of the previous syntaxes.

Examples

Draw Rectangle

Draw a rectangle that has a lower left corner at the point (1,2). Make the width of the rectangle 5 units and the height 6 units. Then, change the axis limits.

```
rectangle('Position',[1 2 5 6])
axis([0 10 0 10])
```

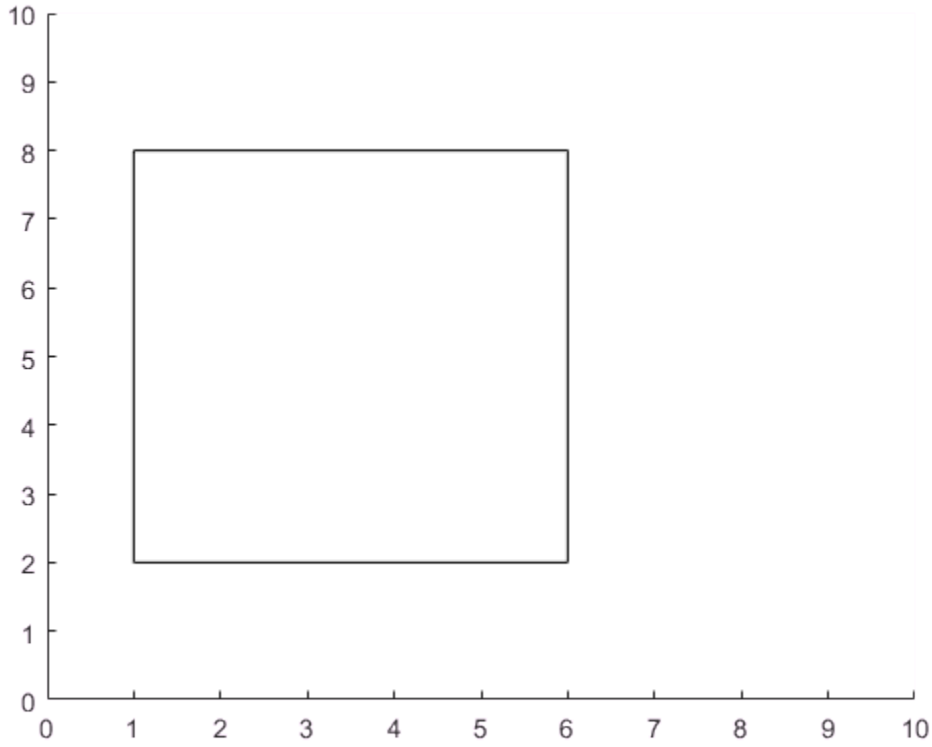

Draw Rectangle with Curved Edges

Draw a rectangle that has a lower left corner at (0,0) and an upper right corner at (2,4). Create the rectangle with curved corners by specifying the curvature as the scalar value `0.2`. For data units of equal length along both the *x*-axis and *y*-axis, use `axis equal`.

```
figure
rectangle('Position',[0 0 2 4],'Curvature',0.2)
axis equal
```

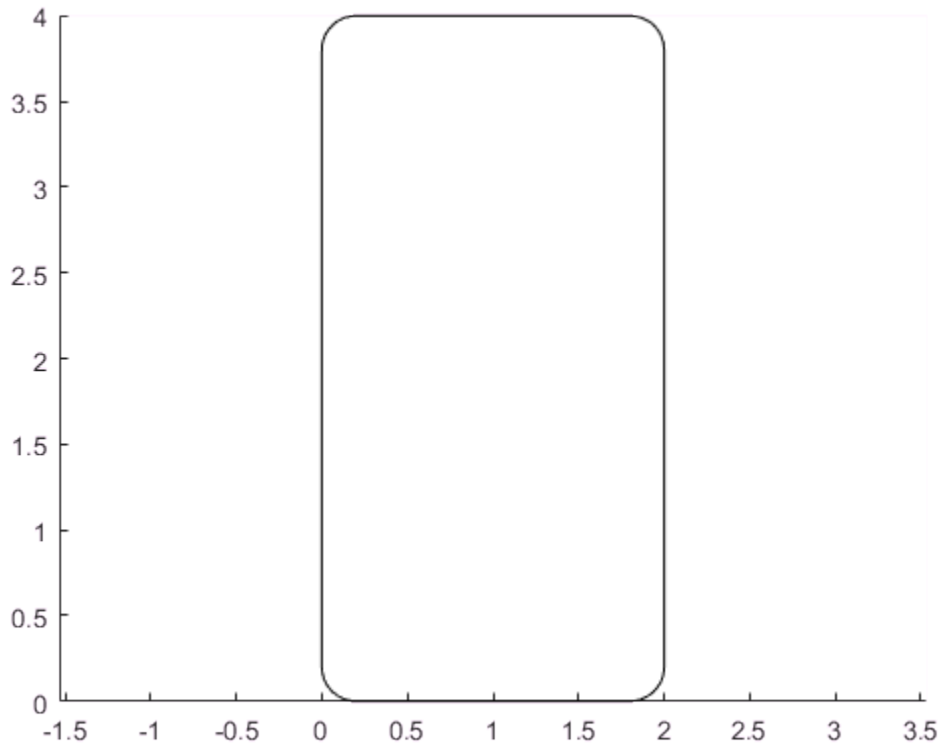

Add a second rectangle that has the shortest side completely curved by specifying the curvature as the scalar value `1`.

```
rectangle('Position',[3 0 2 4],'Curvature',1)
```

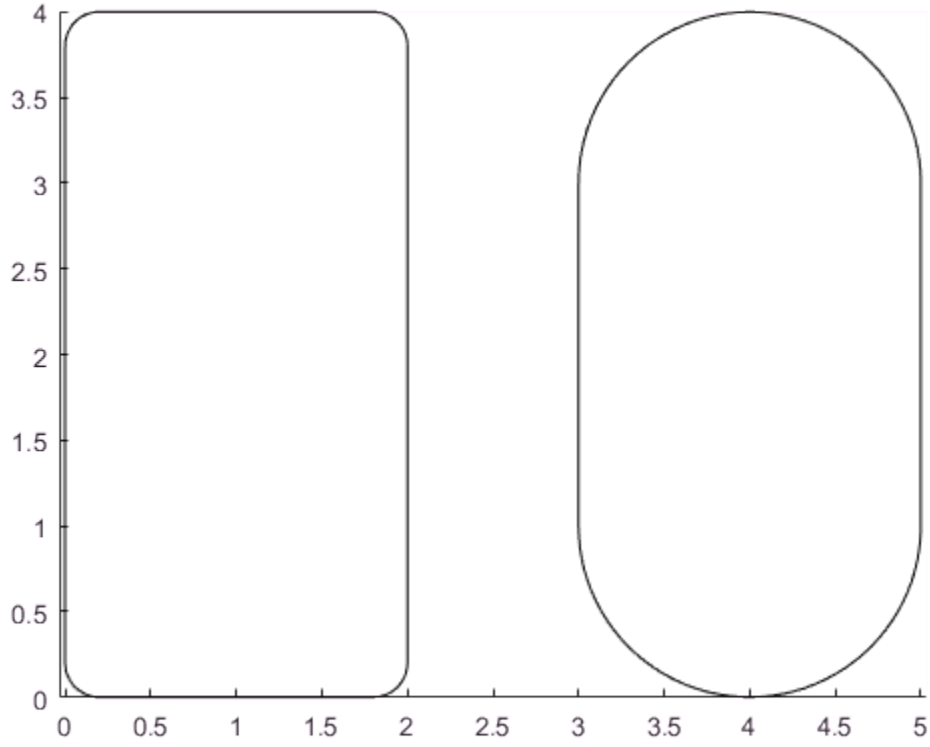

Add a third rectangle and use different curvatures along the horizontal and vertical sides. Use a horizontal curvature of 0.5 to make 50 percent of each horizontal side curved. Use a vertical curvature of 1 to make both vertical sides completely curved.

```
rectangle('Position',[6 0 2 4],'Curvature',[0.5,1])
```

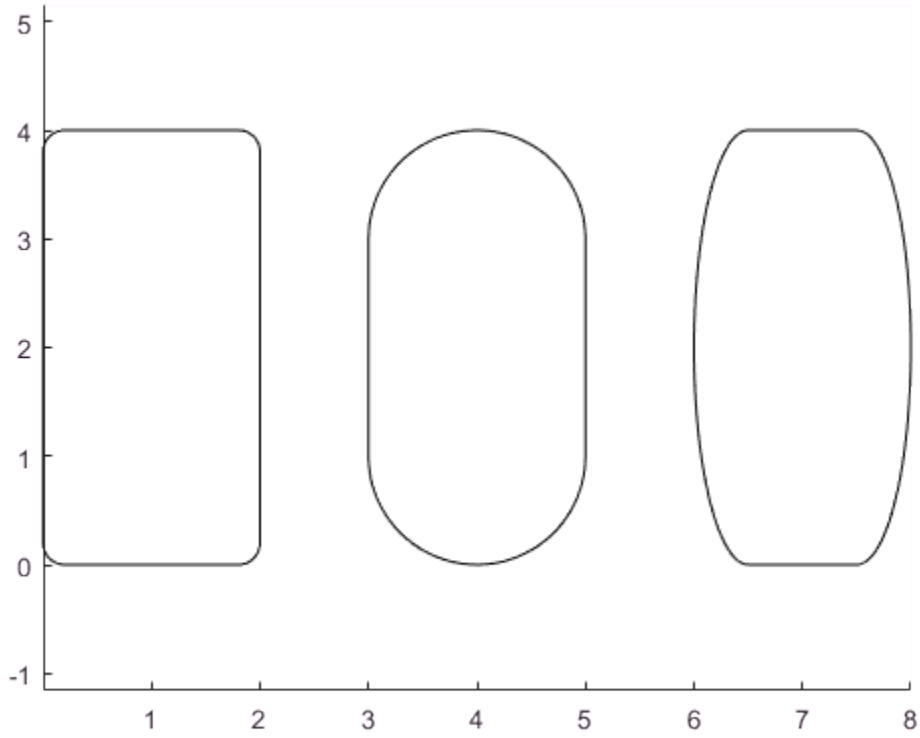

Draw Circle

Draw a circle by setting the `Curvature` property to `[1 1]`. Draw the circle so that it fills the rectangular area between the points (2,4) and (4,6). The `Position` property defines the smallest rectangle that contains the circle.

```
pos = [2 4 2 2];
rectangle('Position',pos,'Curvature',[1 1])
axis equal
```

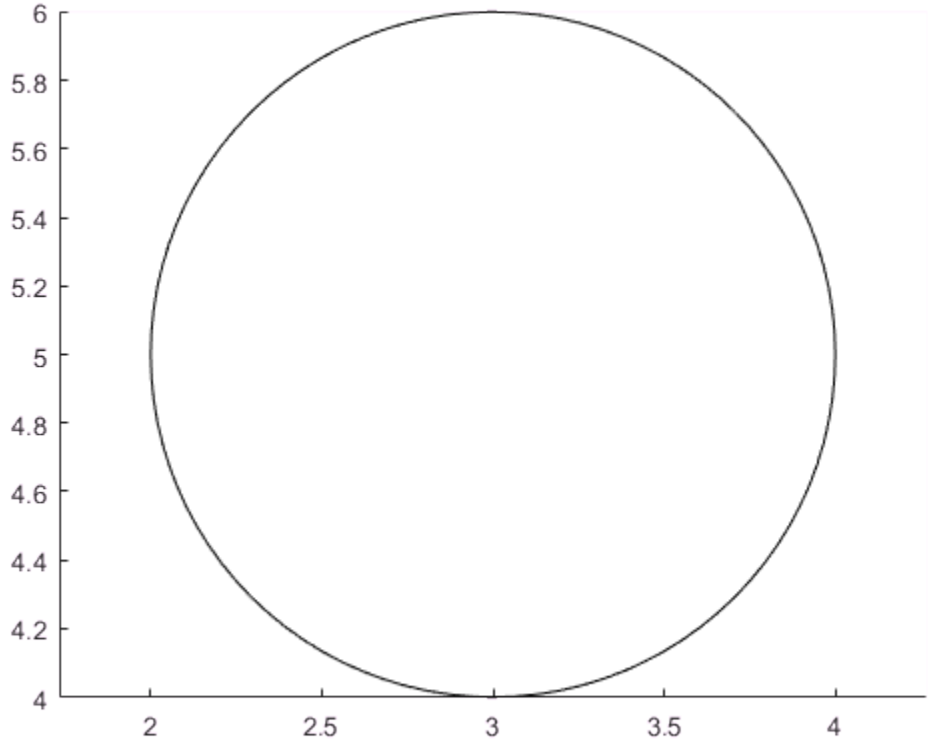

Draw a red rectangle using the same position values to show how the circle fills the rectangular area.

```
rectangle('Position',pos,'EdgeColor','r')
```

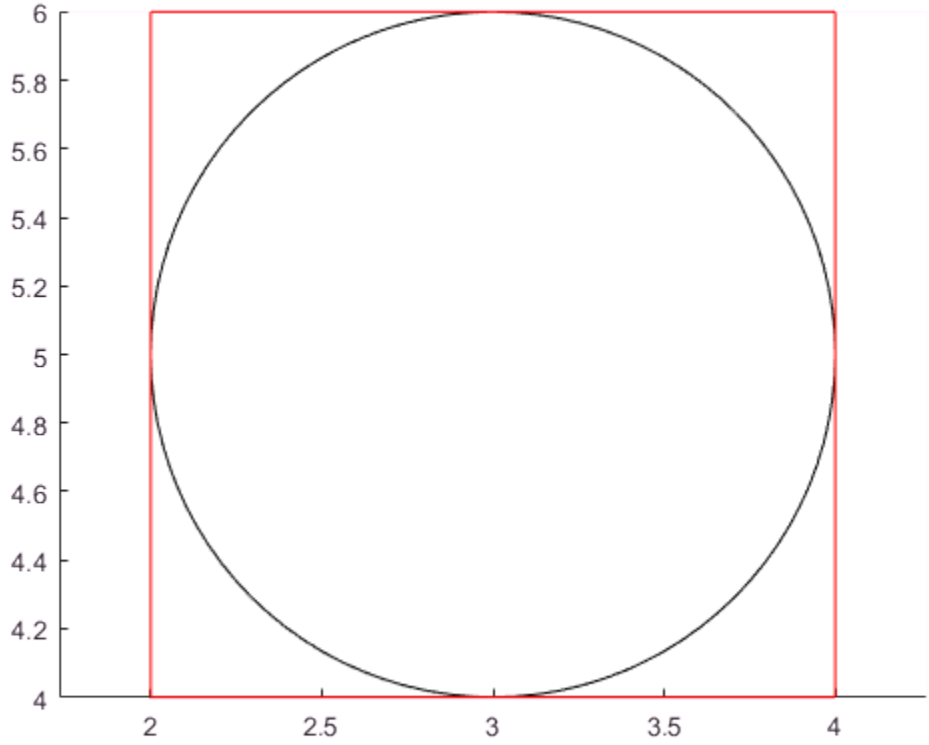

Specify Rectangle Outline and Fill Color

Draw a rectangle and specify the fill color, outline color, and outline width.

```
rectangle('Position',[1,2,5,10],'FaceColor',[0 .5 .5],'EdgeColor','b',...
    'LineWidth',3)
```

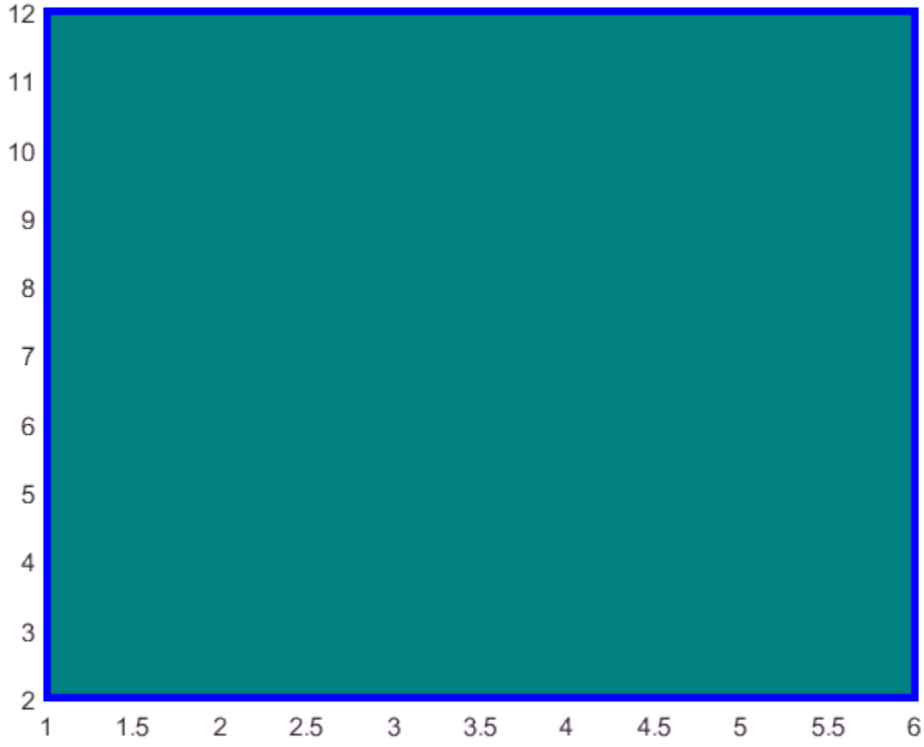

Modify Rectangle After Creation

Add a rectangle to the current axes and return the rectangle object, `r`.

```
r = rectangle('Position',[0 0 1 1]')
```

```
r =
  Rectangle with properties:

    FaceColor: 'none'
    EdgeColor: [0 0 0]
    LineWidth: 0.5000
```

```
    LineStyle: '-'
    Curvature: [0 0]
     Position: [0 0 1 1]

  Show all properties
```

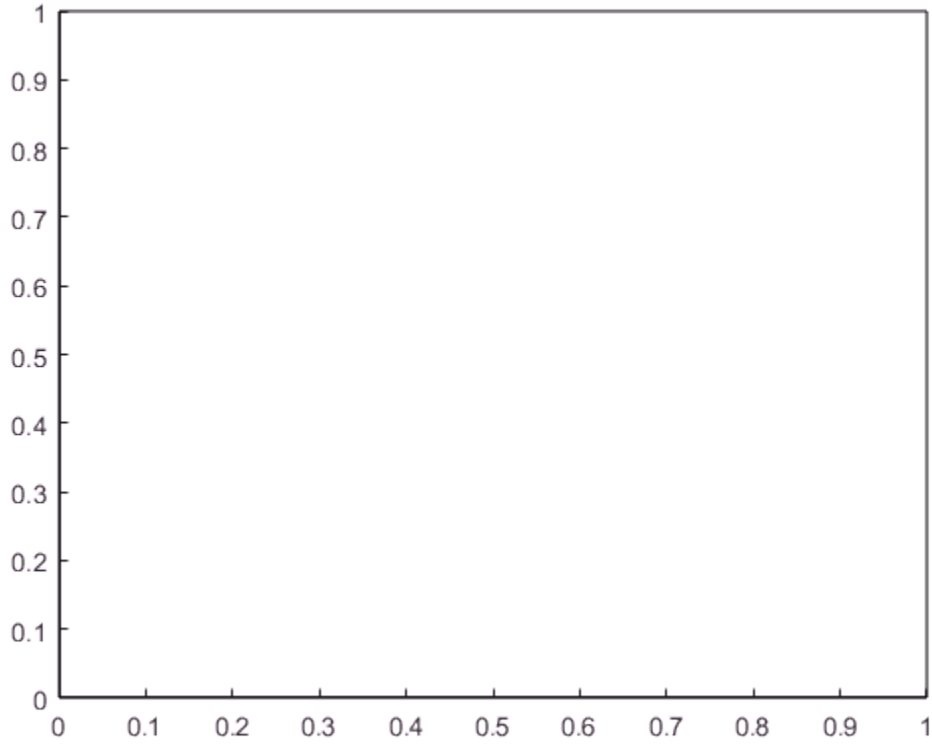

Modify the rectangle after creation using `r`. Change the fill color, outline color, and outline width.

```
r.FaceColor = [0 .5 .5];
r.EdgeColor = 'b';
r.LineWidth = 3;
```

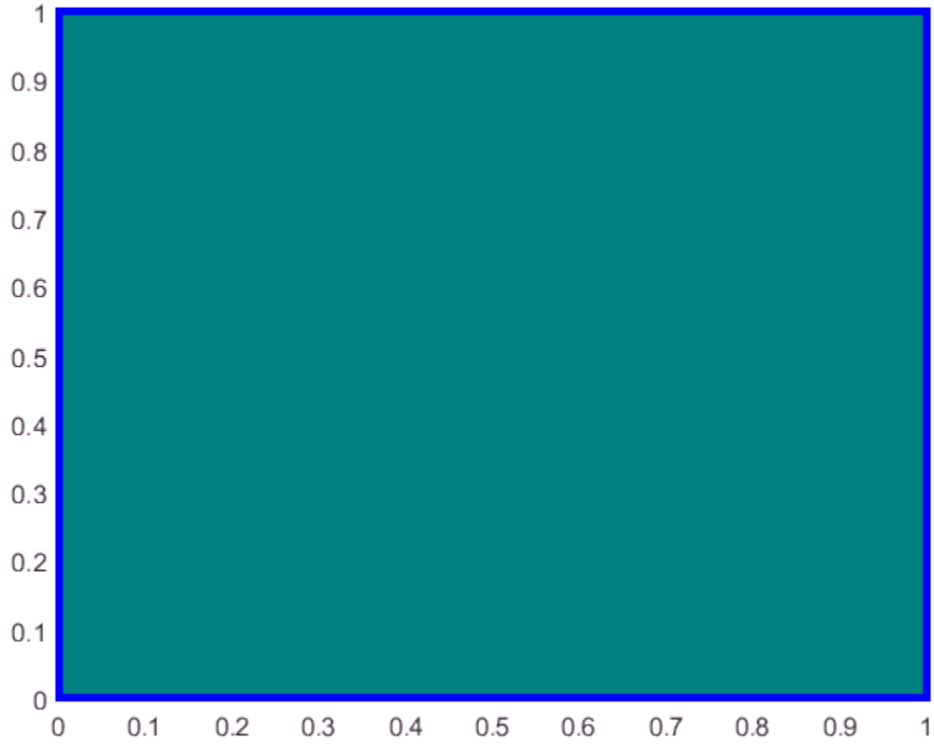

Input Arguments

pos — Size and location of rectangle

four-element vector of the form `[x y w h]`

Size and location of the rectangle, specified as a four-element vector of the form `[x y w h]`. The `x` and `y` elements define the coordinate for the lower left corner of the rectangle. The `w` and `h` elements define the dimensions of the rectangle.

All values are in data units.

Example: `rectangle('Position',[0.5 0.5 0.3 0.4])`

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`cur` — Amount of horizontal and vertical curvature

`[0 0]` (default) | two-element vector | scalar

Amount of horizontal and vertical curvature, specified as a two-element vector or a scalar value. Use this property to vary the shape of the rectangle from rectangular to ellipsoidal.

The horizontal curvature is the fraction of the width that is curved along the top and bottom edges. The vertical curvature is the fraction of the height that is curved along the left and right edges.

- To use different horizontal and vertical curvatures, specify a two-element vector of the form `[horizontal vertical]`. The `horizontal` element determines the horizontal curvature and the `vertical` element determines the vertical curvature. Specify the values between 0 (no curvature) and 1 (maximum curvature). For example, a value of `[0 0]` creates a rectangle with square edges and value of `[1 1]` creates an ellipse.
- To use the same curvature for the horizontal and vertical edges, specify a scalar value between 0 and 1, inclusive. The shorter dimension determines the length of the curvature.

Example: `[0.5 0.6]`

Example: `0.75`

Data Types: `double`

`ax` — Axes object

axes object

Axes object. If you do not specify an axes object, then `rectangle` uses the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `rectangle('Position',[0 0 1 1],'EdgeColor','k','FaceColor',[0 .5 .5])`

`'FaceColor'` — Fill color

`'none'` (default) | RGB triplet | character vector of color name

Fill color, specified as `'none'`, an RGB triplet, or a character vector of a color name. The `'none'` option makes the fill invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'EdgeColor'` — Outline color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Outline color, specified as an RGB triplet, a character vector of a color name, or `'none'`. The `'none'` option makes the edge invisible. The default RGB triplet value of `[0 0 0]` corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

'LineWidth' — Line width

0.5 (default) | positive value

Line width, specified as a positive value in point units.

Example: 0.75

'LineStyle' — Line style

'-' (default) | '--' | ':' | '-.' | 'none'

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
'-'	Solid line	
'--'	Dashed line	
':'	Dotted line	
'-.'	Dash-dotted line	

Line Style	Description	Resulting Line
`'none'`	No line	No line

See Also

See Also

Functions
`annotation` | `line` | `patch`

Properties
Rectangle Properties

Introduced before R2006a

Rectangle Properties

Control rectangle appearance and behavior

Description

Rectangle properties control the appearance and behavior of a rectangle object. By changing property values, you can modify certain aspects of the rectangle.

Starting in R2014b, you can use dot notation to query and set properties.

```
h = rectangle;
w = h.LineWidth;
h.LineWidth = 3;
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Curvature` — Amount of horizontal and vertical curvature

`[0 0]` (default) | two-element vector | scalar

Amount of horizontal and vertical curvature, specified as a two element vector of the form `[x y]` or a scalar value. Use this property to vary the shape of the rectangle from rectangular to ellipsoidal. The horizontal curvature is the fraction of the width that is curved along the top and bottom edges. The vertical curvature is the fraction of the height that is curved along the left and right edges.

- To use different horizontal and vertical curvatures, specify a two-element vector of the form `[x y]`. The `x` element determines the horizontal curvature and the `y` element determines the vertical curvature. Specify `x` and `y` as values between 0 (no curvature) and 1 (maximum curvature). For example, a value of `[0 0]` creates a rectangle with square edges and value of `[1 1]` creates an ellipse.
- To use the same curvature for the horizontal and vertical edges, specify a scalar value in the range `[0,1]`. The shorter dimension determines the length of the curvature.

Example: `[0.5 0.6]`

Example: `0.75`

EdgeColor — Outline color

[0 0 0] (default) | RGB triplet | character vector of color name | 'none'

Outline color, specified as an RGB triplet, a character vector of a color name, or 'none'. The 'none' option makes the edge invisible. The default RGB triplet value of [0 0 0] corresponds to black.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

FaceColor — Fill color

'none' (default) | RGB triplet | character vector of color name

Fill color, specified as 'none', an RGB triplet, or a character vector of a color name. The 'none' option makes the fill invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in point units.

Example: `0.75`

`AlignVertexCenters` — Sharp vertical and horizontal lines

`'off'` (default) | `'on'`

Sharp vertical and horizontal lines, specified as `'off'` or `'on'`.

If the associated figure has a GraphicsSmoothing property set to `'on'` and a Renderer property set to `'opengl'`, then the figure applies a smoothing technique to plots. In some cases, this smoothing technique can cause vertical and horizontal lines to appear uneven in thickness or color. Use the `AlignVertexCenters` property to eliminate the uneven appearance.

- `'off'` — Do not sharpen vertical or horizontal lines. The lines might appear uneven in thickness or color.
- `'on'` — Sharpen vertical and horizontal lines to eliminate an uneven appearance.

Note: You must have a graphics card that supports this feature. To see if the feature is supported, type `opengl info`. If it is supported, then the returned fields contain the line `SupportsAlignVertexCenters: 1`.

Location and Size

`Position` — Size and location of rectangle

`[0 0 1 1]` (default) | four-element vector

Size and location of the rectangle, specified as a four-element vector of the form `[x y width height]`. Specify the values in data units. The `x` and `y` elements define the coordinate for the lower-left corner of the rectangle. The `width` and `height` elements define the dimensions of the rectangle.

Example: `[0.5 0.5 0.3 0.4]`

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.

- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.

- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'rectangle'`

This property is read-only.

Type of graphics object, returned as `'rectangle'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — Tag to associate with rectangle

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Rectangle` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. The `HitTest` property determines if the `Rectangle` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `Rectangle` object that has no color. The `HitTest` property determines if the `Rectangle` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Rectangle` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Rectangle` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Rectangle` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Rectangle` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Rectangle` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Rectangle` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments

- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`rectangle`

Topics
"Access Property Values"
"Graphics Object Properties"

rectint

Rectangle intersection area

Syntax

```
area = rectint(A,B)
```

Description

`area = rectint(A,B)` returns the area of intersection of the rectangles specified by position vectors `A` and `B`.

If `A` and `B` each specify one rectangle, the output `area` is a scalar.

`A` and `B` can also be matrices, where each row is a position vector. `area` is then a matrix giving the intersection of all rectangles specified by `A` with all the rectangles specified by `B`. That is, if `A` is `n`-by-`4` and `B` is `m`-by-`4`, then `area` is an `n`-by-`m` matrix where `area(i,j)` is the intersection area of the rectangles specified by the `i`th row of `A` and the `j`th row of `B`.

Note A position vector is a four-element vector `[x,y,width,height]`, where the point defined by `x` and `y` specifies one corner of the rectangle, and `width` and `height` define the size in units along the x and y axes respectively.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`polyarea`

Introduced before R2006a

recycle

Set option to move deleted files to recycle folder

Syntax

```
status = recycle
previousState = recycle(state)
```

Description

`status = recycle` returns the current state for recycling files you remove using the `delete` function. When `status` is `off`, the `delete` function permanently removes the files. When `status` is `on`, deleted files move to a different location. For details, see the Tips section.

Note: On Mac platforms, the `recycle` option is not applied to files deleted from network drives.

`previousState = recycle(state)` sets the recycle option for MATLAB to the specified state, either `on` or `off`. The returned `previousState` value is the recycle state before running the statement.

Examples

View Current Recycling State

Start from a state where file recycling is off. Verify the current recycle state.

```
state = recycle
```

```
state =
```

`off`

Turn File Recycling On

Turn on file recycling. Then, delete an existing file and move it to the recycle bin or temporary folder.

```
recycle('on');
delete('myfile.txt')
```

Input Arguments

`state` — State of recycle option

`'on' | 'off'`

State of the recycle option, specified as `'on'` or `'off'`.

Tips

- The location for storing recycled files varies by platform, as follows:
  - Microsoft Windows platforms — Recycle bin.
  - Mac platforms — Trash.
  - Linux platforms — Subfolder with the prefix `MATLAB_Files_` in the system temporary folder, as returned by the `tempdir` function.
- The general preference for **Deleting files** sets the state of the `recycle` function at startup. When you change the preference, MATLAB changes the state of `recycle`. When you change the state of `recycle`, MATLAB also updates the **Deleting files** preference.

See Also

See Also

`delete` | `dir` | `ls` | `rmdir`

Topics

"General Preferences"

Introduced before R2006a

reducepatch

Reduce number of patch faces

Syntax

```
reducepatch(p,r)
nfv = reducepatch(p,r)
nfv = reducepatch(fv,r)
nfv = reducepatch(p)
nfv = reducepatch(fv)
reducepatch(...,'fast')
reducepatch(...,'verbose')
nfv = reducepatch(f,v,r)
[nf,nv] = reducepatch(...)
```

Description

`reducepatch(p,r)` reduces the number of faces of the patch identified by handle `p`, while attempting to preserve the overall shape of the original object. The MATLAB software interprets the reduction factor `r` in one of two ways depending on its value:

- If `r` is less than 1, `r` is interpreted as a fraction of the original number of faces. For example, if you specify `r` as 0.2, then the number of faces is reduced to 20% of the number in the original patch.
- If `r` is greater than or equal to 1, then `r` is the target number of faces. For example, if you specify `r` as 400, then the number of faces is reduced until there are 400 faces remaining.

`nfv = reducepatch(p,r)` returns the reduced set of faces and vertices but does not set the Faces and Vertices properties of patch `p`. The struct `nfv` contains the faces and vertices after reduction.

`nfv = reducepatch(fv,r)` performs the reduction on the faces and vertices in the struct `fv`.

`nfv = reducepatch(p)` and `nfv = reducepatch(fv)` uses a reduction value of `0.5`.

`reducepatch(...,'fast')` assumes the vertices are unique and does not compute shared vertices.

`reducepatch(...,'verbose')` prints progress messages to the command window as the computation progresses.

`nfv = reducepatch(f,v,r)` performs the reduction on the faces in `f` and the vertices in `v`.

`[nf,nv] = reducepatch(...)` returns the faces and vertices in the arrays `nf` and `nv`.

Examples

Reduce Number of Patch Faces

This example illustrates the effect of reducing the number of faces to only 15% of the original value.

```
figure
[x,y,z,v] = flow;
p = patch(isosurface(x,y,z,v,-3));
p.FaceColor = 'w';
p.EdgeColor = 'b';
daspect([1,1,1])
view(3)
```

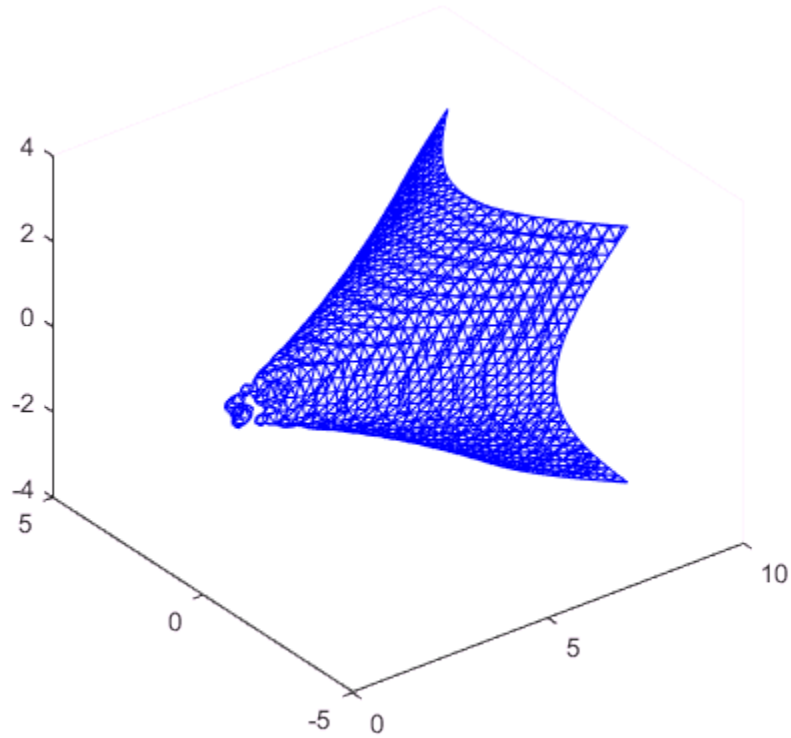

Reduce the number of faces.

```
reducepatch(p,0.15)
```

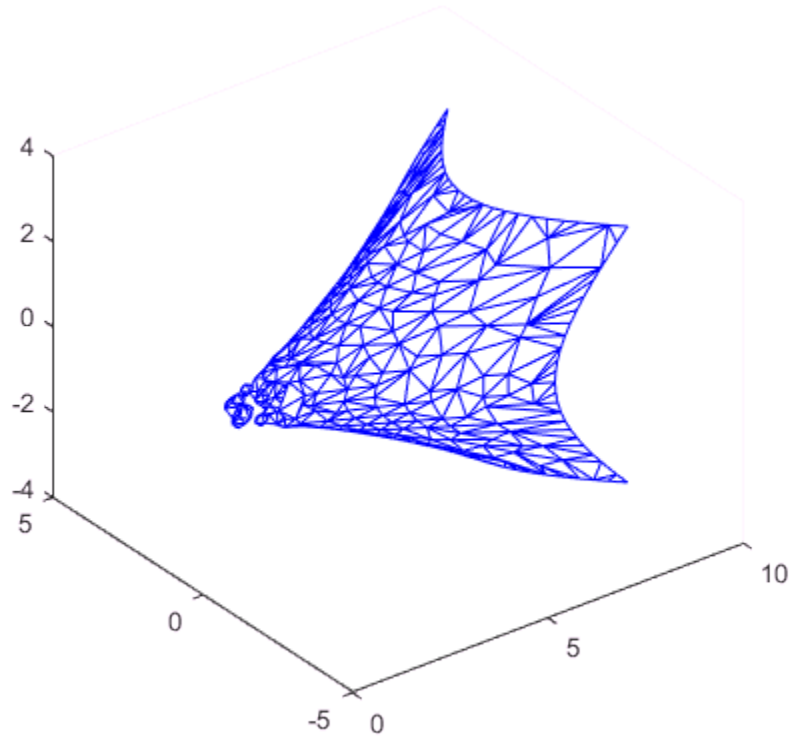

Tips

If the patch contains nonshared vertices, MATLAB computes shared vertices before reducing the number of faces. If the faces of the patch are not triangles, MATLAB triangulates the faces before reduction. The faces returned are always defined as triangles.

The number of output triangles may not be exactly the number specified with the reduction factor argument (`r`), particularly if the faces of the original patch are not triangles.

See Also

`isosurface` | `isocaps` | `isonormals` | `smooth3` | `subvolume` | `reducevolume`

Topics

Vector Field Displayed with Cone Plots

Introduced before R2006a

reducevolume

Reduce number of elements in volume data set

Syntax

```
[nx,ny,nz,nv] = reducevolume(X,Y,Z,V,[Rx,Ry,Rz])
[nx,ny,nz,nv] = reducevolume(V,[Rx,Ry,Rz])
nv = reducevolume(...)
```

Description

`[nx,ny,nz,nv] = reducevolume(X,Y,Z,V,[Rx,Ry,Rz])` reduces the number of elements in the volume by retaining every `Rx`th element in the *x* direction, every `Ry`th element in the *y* direction, and every `Rz`th element in the *z* direction. If a scalar `R` is used to indicate the amount or reduction instead of a three-element vector, the MATLAB software assumes the reduction to be `[R R R]`.

The arrays `X`, `Y`, and `Z` define the coordinates for the volume `V`. The reduced volume is returned in `nv`, and the coordinates of the reduced volume are returned in `nx`, `ny`, and `nz`.

`[nx,ny,nz,nv] = reducevolume(V,[Rx,Ry,Rz])` assumes the arrays `X`, `Y`, and `Z` are defined as `[X,Y,Z] = meshgrid(1:n,1:m,1:p)`, where `[m,n,p] = size(V)`.

`nv = reducevolume(...)` returns only the reduced volume.

Examples

Reduce Volume Data Set

This example uses a data set that is a collection of MRI slices of a human skull. This data is processed in a variety of ways:

- The 4-D array is squeezed (`squeeze`) into three dimensions and then reduced (`reducevolume`) so that what remains is every fourth element in the x and y directions and every element in the z direction.

- The reduced data is smoothed (`smooth3`).
- The outline of the skull is an isosurface generated as a patch (`p1`) whose vertex normals are recalculated to improve the appearance when lighting is applied (`patch`, `isosurface`, `isonormals`).
- A second patch (`p2`) with an interpolated face color draws the end caps (`FaceColor`) isocaps).
- The view of the object is set (`view`, `axis`, `daspect`).
- A 100-element grayscale colormap provides coloring for the end caps (`colormap`).
- Adding a light to the right of the camera illuminates the object (`camlight`, `lighting`).

```
load mri
D = squeeze(D);
[x,y,z,D] = reducevolume(D,[4,4,1]);
D = smooth3(D);
p1 = patch(isosurface(x,y,z,D,5),...
    'FaceColor','red','EdgeColor','none');
isonormals(x,y,z,D,p1)
p2 = patch(isocaps(x,y,z,D,5),...
    'FaceColor','interp','EdgeColor','none');
view(3)
axis tight
daspect([1,1,.4])
colormap(gray(100))
camlight
lighting gouraud
```

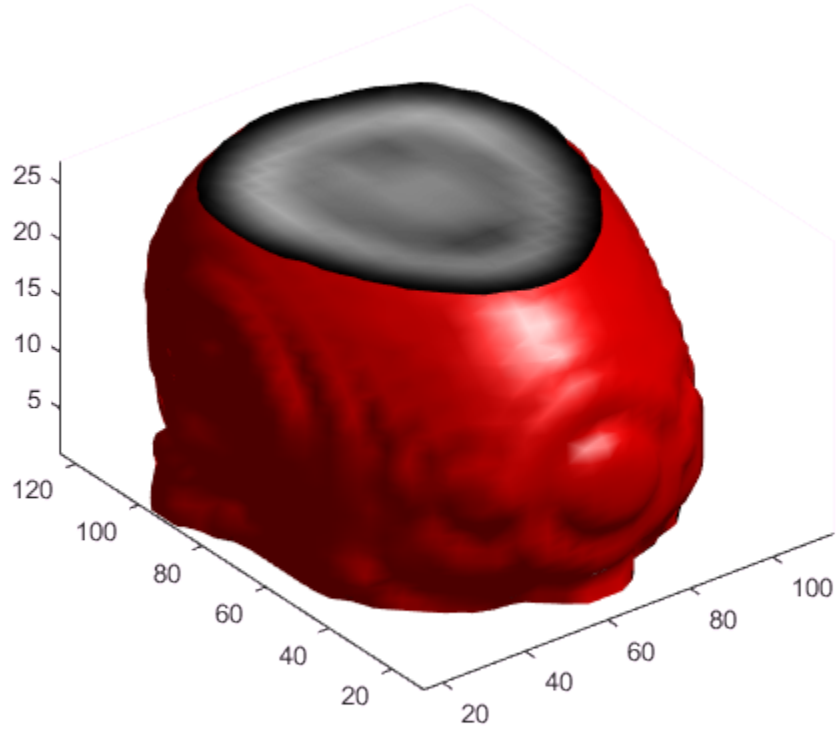

See Also

`isosurface` | `isocaps` | `isonormals` | `smooth3` | `subvolume` | `reducepatch`

Introduced before R2006a

refresh

Redraw current figure

Syntax

```
refresh
refresh(h)
```

Description

`refresh` erases and redraws the current figure.

`refresh(h)` redraws the figure identified by `h`.

See Also

Introduced before R2006a

refreshdata

Refresh data in graph when data source is specified

Syntax

```
refreshdata
refreshdata(figure_handle)
refreshdata(object_handles)
refreshdata(object_handles,'workspace')
```

Description

`refreshdata` evaluates any data source properties (`XDataSource`, `YDataSource`, or `ZDataSource`) on all objects in graphs in the current figure. If the specified data source has changed, the MATLAB software updates the graph to reflect this change.

Note: The variable assigned to the data source property must be in the base workspace or you must specify the *`workspace`* option as `'caller'`.

`refreshdata(figure_handle)` refreshes the data of the objects in the specified figure.

`refreshdata(object_handles)` refreshes the data of the objects specified in `object_handles` or the children of those objects. Therefore, `object_handles` can contain figure, axes, or plot object handles.

`refreshdata(object_handles,'workspace')` enables you to specify whether the data source properties are evaluated in the base workspace or the workspace of the function in which `refreshdata` was called. `'workspace'` is can be one of these values:

- `'base'` — Evaluate the data source properties in the base workspace.
- `'caller'` — Evaluate the data source properties in the workspace of the function that called refreshdata.

Examples

Refresh Graph with Updated Data

Plot a sine wave and return the chart line handle, `h`.

```
x = linspace(0,8);
y = sin(x);
figure
h = plot(x,y);
```

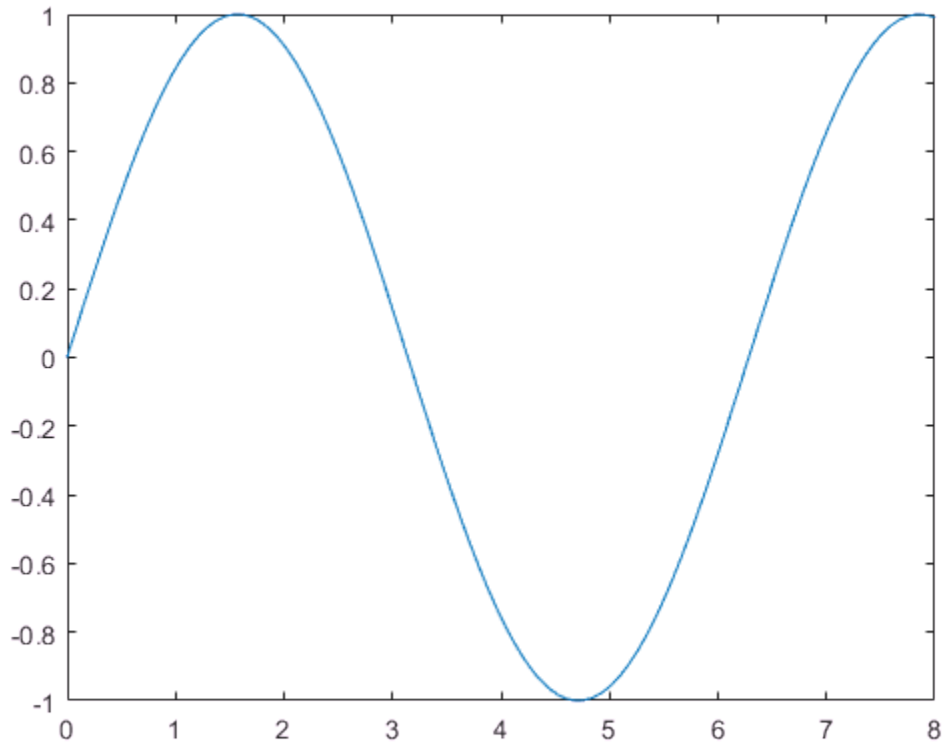

Identify the data sources for the plot by setting the `XDataSource` and `YDataSource` properties of the line to `x` and `y`, respectively. Then, modify `y`. Call `refreshdata` so that the graph updates with the changes to `y`.

```
h.XDataSource = 'x';
h.YDataSource = 'y';

y = sin(x.^3);
refreshdata
```

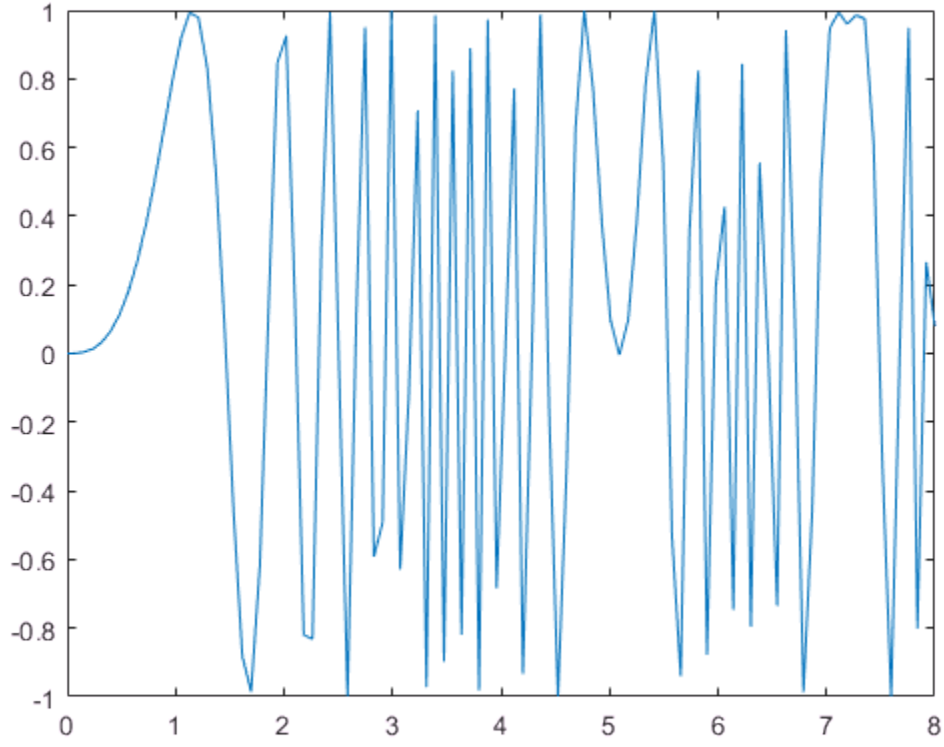

Tips

The Linked Plots feature (see documentation for `linkdata`) sets up data sources for graphs and synchronizes them with the workspace variables they display. When you use

this feature, you do not also need to call `refreshdata`, as it is essentially automatically triggered every time a data source changes.

If you are not using the Linked Plots feature, you need to set the `XDataSource`, `YDataSource`, and/or `ZDataSource` properties of a graph in order to use `refreshdata`. You can do that programmatically or use the Property Editor, one of the plotting tools. In the Property Editor, select the graph (e.g., a chart line object) and type in (or select from the drop-down choices) the name(s) of the workspace variable(s) from which you want the plot to refresh, in the fields labelled **X Data Source**, **Y Data Source**, and/or **Z Data Source**. The call to `refreshdata` causes the graph to update.

See Also

`linkprop` | `linkdata` | `linkaxes`

Introduced before R2006a

regexp

Match regular expression (case sensitive)

Syntax

```
startIndex = regexp(str,expression)
[startIndex,endIndex] = regexp(str,expression)

out = regexp(str,expression,outkey)
[out1,...,outN] = regexp(str,expression,outkey1,...,outkeyN)

___ = regexp(___,option1,...,optionM)

___ = regexp(___,'forceCellOutput')
```

Description

`startIndex = regexp(str,expression)` returns the starting index of each substring of `str` that matches the character patterns specified by the regular expression. If there are no matches, `startIndex` is an empty array.

`[startIndex,endIndex] = regexp(str,expression)` returns the starting and ending indices of all matches.

`out = regexp(str,expression,outkey)` returns the output specified by `outkey`. For example, if `outkey` is `'match'`, then `regexp` returns the substrings that match the expression rather than their starting indices.

`[out1,...,outN] = regexp(str,expression,outkey1,...,outkeyN)` returns the outputs specified by multiple output keywords, in the specified order. For example, if you specify `'match','tokens'`, then `regexp` returns substrings that match the entire expression and tokens that match parts of the expression.

`___ = regexp(___,option1,...,optionM)` modifies the search using the specified option flags. For example, specify `'ignorecase'` to perform a case-insensitive match. You can include any of the inputs and request any of the outputs from previous syntaxes.

`___ = regexp( ___ ,'forceCellOutput')` returns each output argument as a scalar cell. The cells contain the numeric arrays or substrings that are described as the outputs of the previous syntaxes. You can include any of the inputs and request any of the outputs from previous syntaxes.

Examples

Find Patterns in Text

Find words that start with `c`, end with `t`, and contain one or more vowels between them.

```
str = 'bat cat can car coat court CUT ct CAT-scan';
expression = 'c[aeiou]+t';
startIndex = regexp(str,expression)
```

```
startIndex =

     5    17
```

The regular expression `'c[aeiou]+t'` specifies this pattern:

- `c` must be the first character.
- `c` must be followed by one of the characters inside the brackets, `[aeiou]`.
- The bracketed pattern must occur one or more times, as indicated by the `+` operator.
- `t` must be the last character, with no characters between the bracketed pattern and the `t`.

Values in `startIndex` indicate the index of the first character of each word that matches the regular expression. The matching word `cat` starts at index 5, and `coat` starts at index 17. The words `CUT` and `CAT` do not match because they are uppercase.

Find Patterns in Multiple Pieces of Text

Find the location of capital letters and spaces within character vectors in a cell array.

```
str = {'Madrid, Spain','Romeo and Juliet','MATLAB is great'};
capExpr = '[A-Z]';
spaceExpr = '\s';
```

```
capStartIndex = regexp(str,capExpr);
spaceStartIndex = regexp(str,spaceExpr);
```

`capStartIndex` and `spaceStartIndex` are cell arrays because the input `str` is a cell array.

View the indices for the capital letters.

```
celldisp(capStartIndex)
```

```
capStartIndex{1} =

     1     9


capStartIndex{2} =

     1    11


capStartIndex{3} =

     1     2     3     4     5     6
```

View the indices for the spaces.

```
celldisp(spaceStartIndex)
```

```
spaceStartIndex{1} =

     8


spaceStartIndex{2} =

     6    10
```

```
spaceStartIndex{3} =

     7    10
```

Return Substrings Using match Keyword

Capture words within a character vector that contain the letter `x`.

```
str = 'EXTRA! The regexp function helps you relax.';
expression = '\w*x\w*';
matchStr = regexp(str,expression,'match')
```

```
matchStr = 1×2 cell array
    'regexp'    'relax'
```

The regular expression `'\w*x\w*'` specifies that the character vector:

- Begins with any number of alphanumeric or underscore characters, `\w*`.
- Contains the lowercase letter `x`.
- Ends with any number of alphanumeric or underscore characters after the `x`, including none, as indicated by `\w*`.

Split Text at Delimiter Using split Keyword

Split a character vector into several substrings, where each substring is delimited by a `^` character.

```
str = ['Split ^this text into ^several pieces'];
expression = '\^';
splitStr = regexp(str,expression,'split')
```

```
splitStr = 1×3 cell array
    'Split '    'this text into '    'several pieces'
```

Because the caret symbol has special meaning in regular expressions, precede it with the escape character, a backslash (\). To split a character vector at other delimiters, such as a semicolon, you do not need to include the backslash.

Return Both Matching and Nonmatching Substrings

Capture parts of a character vector that match a regular expression using the `'match'` keyword, and the remaining parts that do not match using the `'split'` keyword.

```
str = 'She sells sea shells by the seashore.';
expression = '[Ss]h.';
[match,noMatch] = regexp(str,expression,'match','split')
```

```
match = 1×3 cell array
    'She'    'she'    'sho'


noMatch = 1×4 cell array
    ''    ' sells sea '    'lls by the sea'    're.'
```

The regular expression `'[Ss]h.'` specifies that:

- `S` or `s` is the first character.
- `h` is the second character.
- The third character can be anything, including a space, as indicated by the dot (`.`).

When the first (or last) character in a character vector matches a regular expression, the first (or last) return value from the `'split'` keyword is an empty character vector.

Optionally, reassemble the original character vector from the substrings.

```
combinedStr = strjoin(noMatch,match)
```

```
combinedStr =
'She sells sea shells by the seashore.'
```

Capture Substrings of Matches Using Ordinal Tokens

Find the names of HTML tags by defining a token within a regular expression. Tokens are indicated with parentheses, `()`.

```
str = '<title>My Title</title><p>Here is some text.</p>';
expression = '<(\w+).*>.*</\1>';
[tokens,matches] = regexp(str,expression,'tokens','match');
```

The regular expression `<(\w+).*>.*</\1>` specifies this pattern:

- `<(\w+)` finds an opening angle bracket followed by one or more alphanumeric or underscore characters. Enclosing `\w+` in parentheses captures the name of the HTML tag in a token.
- `.*>` finds any number of additional characters, such as HTML attributes, and a closing angle bracket.
- `</\1>` finds the end tag corresponding to the first token (indicated by `\1`). The end tag has the form `</tagname>`.

View the tokens and matching substrings.

```
celldisp(tokens)
```

```
tokens{1}{1} =

title


tokens{2}{1} =

p
```

```
celldisp(matches)
```

```
matches{1} =

<title>My Title</title>


matches{2} =

<p>Here is some text.</p>
```

Capture Substrings of Matches Using Named Tokens

Parse dates that can appear with either the day or the month first, in these forms: `mm/dd/yyyy` or `dd-mm-yyyy`. Use named tokens to identify each part of the date.

```
str = '01/11/2000  20-02-2020  03/30/2000  16-04-2020';
expression = ['(?<month>\d+)/(?<day>\d+)/(?<year>\d+)|'...
              '(?<day>\d+)-(?<month>\d+)-(?<year>\d+)'];
```

```
tokenNames = regexp(str,expression,'names');
```

The regular expression specifies this pattern:

- `(?<name>\d+)` finds one or more numeric digits and assigns the result to the token indicated by name.
- `|` is the logical `or` operator, which indicates that there are two possible patterns for dates. In the first pattern, slashes (`/`) separate the tokens. In the second pattern, hyphens (`-`) separate the tokens.

View the named tokens.

```
for k = 1:length(tokenNames)
   disp(tokenNames(k))
end
```

```
    month: '01'
      day: '11'
     year: '2000'

    month: '02'
      day: '20'
     year: '2020'

    month: '03'
      day: '30'
     year: '2000'

    month: '04'
      day: '16'
     year: '2020'
```

Perform Case-Insensitive Matches

Find both uppercase and lowercase instances of a word.

By default, `regexp` performs case-sensitive matching.

```
str = 'A character vector with UPPERCASE and lowercase text.';
expression = '\w*case';
matchStr = regexp(str,expression,'match')
```

```
matchStr = cell
    'lowercase'
```

The regular expression specifies that the character vector:

- Begins with any number of alphanumeric or underscore characters, `\w*`.
- Ends with the literal text `case`.

The `regexpi` function uses the same syntax as `regexp`, but performs case-insensitive matching.

```
matchWithRegexpi = regexpi(str,expression,'match')
```

```
matchWithRegexpi = 1×2 cell array
    'UPPERCASE'    'lowercase'
```

Alternatively, disable case-sensitive matching for `regexp` using the `'ignorecase'` option.

```
matchWithIgnorecase = regexp(str,expression,'match','ignorecase')
```

```
matchWithIgnorecase = 1×2 cell array
    'UPPERCASE'    'lowercase'
```

For multiple expressions, disable case-sensitive matching for selected expressions using the `(?i)` search flag.

```
expression = {'(?-i)\w*case';...
              '(?i)\w*case'};
matchStr = regexp(str,expression,'match');
celldisp(matchStr)
```

```
matchStr{1}{1} =

lowercase


matchStr{2}{1} =

UPPERCASE


matchStr{2}{2} =

lowercase
```

Parse Text with Newline Characters

Create a character vector that contains a newline, `\n`, and parse it using a regular expression.

```
str = sprintf('abc\n de');
expression = '.*';
matchStr = regexp(str,expression,'match')
```

```
matchStr = cell
    'abc...'
```

By default, the dot (`.`) matches every character, including the newline, and returns a single match that is equivalent to the original character vector.

Exclude newline characters from the match using the `'dotexceptnewline'` option. This returns separate matches for each line of text.

```
matchStrNoNewline = regexp(str,expression,'match','dotexceptnewline')
```

```
matchStrNoNewline = 1×2 cell array
    'abc'    ' de'
```

Find the first or last character of each line using the `^` or `$` metacharacters and the `'lineanchors'` option.

```
expression = '.$';
lastInLine = regexp(str,expression,'match','lineanchors')
```

```
lastInLine = 1×2 cell array
    'c'    'e'
```

Return Matches in Cell

Find matches within a piece of text and return the output in a scalar cell.

Find words that start with c, end with t, and contain one or more vowels between them. Return the starting indices in a scalar cell.

```
str = 'bat cat can car coat court CUT ct CAT-scan';
expression = 'c[aeiou]+t';
startIndex = regexp(str,expression,'forceCellOutput')
```

```
startIndex = cell
    [1×2 double]
```

To access the starting indices as a numeric array, index into the cell.

```
startIndex{1}
```

```
ans =

     5    17
```

Return the matching and nonmatching substrings. Each output is in its own scalar cell.

```
[match,noMatch] = regexp(str,expression,'match','split','forceCellOutput')
```

```
match = cell
    {1×2 cell}


noMatch = cell
    {1×3 cell}
```

To access the array of matches, index into `match`.

```
match{1}
```

```
ans = 1×2 cell array
    'cat'    'coat'
```

To access the substrings that do not match, index into `noMatch`.

```
noMatch{1}
```

```
ans = 1×3 cell array
    'bat '    ' can car '    ' court CUT ct CAT-scan'
```

Input Arguments

`str` — Input text

character vector | cell array of character vectors | string array

Input text, specified as a character vector, a cell array of character vectors, or a string array. Each character vector in a cell array, or each string in a string array, can be of any length and contain any characters.

If `str` and `expression` are string arrays or cell arrays, they must have the same dimensions.

Data Types: `string` | `char` | `cell`

`expression` — Regular expression
character vector | cell array of character vectors | string array

Regular expression, specified as a character vector, a cell array of character vectors, or a string array. Each expression can contain characters, metacharacters, operators, tokens, and flags that specify patterns to match in `str`.

The following tables describe the elements of regular expressions.

Metacharacters

Metacharacters represent letters, letter ranges, digits, and space characters. Use them to construct a generalized pattern of characters.

Metacharacter	Description	Example
`.`	Any single character, including white space	`'..ain'` matches sequences of five consecutive characters that end with `'ain'`.
`[`$c_1c_2c_3$`]`	Any character contained within the brackets. The following characters are treated literally: `$ | . * + ?` and `-` when not used to indicate a range.	`'[rp.]ain'` matches `'rain'` or `'pain'` or `'.ain'`.
`[^`$c_1c_2c_3$`]`	Any character not contained within the brackets. The following characters are treated literally: `$ | . * + ?` and `-` when not used to indicate a range.	`'[^*rp]ain'` matches all four-letter sequences that end in `'ain'`, except `'rain'` and `'pain'` and `'*ain'`. For example, it matches `'gain'`, `'lain'`, or `'vain'`.
`[`c_1`-`c_2`]`	Any character in the range of c_1 through c_2	`'[A-G]'` matches a single character in the range of `A` through `G`.

Metacharacter	Description	Example
`\w`	Any alphabetic, numeric, or underscore character. For English character sets, `\w` is equivalent to `[a-zA-Z_0-9]`	`'\w*'` identifies a word.
`\W`	Any character that is not alphabetic, numeric, or underscore. For English character sets, `\W` is equivalent to `[^a-zA-Z_0-9]`	`'\W*'` identifies a term that is not a word.
`\s`	Any white-space character; equivalent to `[ \f\n\r\t\v]`	`'\w*n\s'` matches words that end with the letter `n`, followed by a white-space character.
`\S`	Any non-white-space character; equivalent to `[^ \f\n\r\t\v]`	`'\d\S'` matches a numeric digit followed by any non-white-space character.
`\d`	Any numeric digit; equivalent to `[0-9]`	`'\d*'` matches any number of consecutive digits.
`\D`	Any nondigit character; equivalent to `[^0-9]`	`'\w*\D\>'` matches words that do not end with a numeric digit.
`\oN` or `\o{N}`	Character of octal value `N`	`'\o{40}'` matches the space character, defined by octal `40`.
`\xN` or `\x{N}`	Character of hexadecimal value `N`	`'\x2C'` matches the comma character, defined by hex `2C`.

Character Representation

Operator	Description
`\a`	Alarm (beep)
`\b`	Backspace
`\f`	Form feed
`\n`	New line
`\r`	Carriage return
`\t`	Horizontal tab
`\v`	Vertical tab

Operator	Description
`\char`	Any character with special meaning in regular expressions that you want to match literally (for example, use `\\` to match a single backslash)

Quantifiers

Quantifiers specify the number of times a pattern must occur in the matching text.

Quantifier	Matches the expression when it occurs...	Example
`expr*`	0 or more times consecutively.	`'\w*'` matches a word of any length.
`expr?`	0 times or 1 time.	`'\w*(\.m)?'` matches words that optionally end with the extension `.m`.
`expr+`	1 or more times consecutively.	`'<img src="\w+\.gif">'` matches an `<img>` HTML tag when the file name contains one or more characters.
`expr{m,n}`	At least `m` times, but no more than `n` times consecutively. `{0,1}` is equivalent to `?`.	`'\S{4,8}'` matches between four and eight non-white-space characters.
`expr{m,}`	At least `m` times consecutively. `{0,}` and `{1,}` are equivalent to `*` and `+`, respectively.	`'<a href="\w{1,}\.html">'` matches an `<a>` HTML tag when the file name contains one or more characters.
`expr{n}`	Exactly `n` times consecutively. Equivalent to `{n,n}`.	`'\d{4}'` matches four consecutive digits.

Quantifiers can appear in three modes, described in the following table. *q* represents any of the quantifiers in the previous table.

Mode	Description	Example
`expr`*q*	Greedy expression: match as many characters as possible.	Given the text `'<tr><td><p>text</p></td>'`, the expression `'</?t.*>'` matches all characters between `<tr` and `/td>`: `'<tr><td><p>text</p></td>'`

Mode	Description	Example
`expr`*q*`?`	Lazy expression: match as few characters as necessary.	Given the text`'<tr><td><p>text</p></td>'`, the expression `'</?t.*?>'` ends each match at the first occurrence of the closing bracket (>): `'<tr>'  '<td>'  '</td>'`
`expr`*q*`+`	Possessive expression: match as much as possible, but do not rescan any portions of the text.	Given the text`'<tr><td><p>text</p></td>'`, the expression `'</?t.*+>'` does not return any matches, because the closing bracket is captured using `.*`, and is not rescanned.

Grouping Operators

Grouping operators allow you to capture tokens, apply one operator to multiple elements, or disable backtracking in a specific group.

Grouping Operator	Description	Example
`(expr)`	Group elements of the expression and capture tokens.	`'Joh?n\s(\w*)'` captures a token that contains the last name of any person with the first name `John` or `Jon`.
`(?:expr)`	Group, but do not capture tokens.	`'(?:[aeiou][^aeiou]){2}'` matches two consecutive patterns of a vowel followed by a nonvowel, such as `'anon'`. Without grouping, `'[aeiou][^aeiou]{2}'` matches a vowel followed by two nonvowels.
`(?>expr)`	Group atomically. Do not backtrack within the group to complete the match, and do not capture tokens.	`'A(?>.*)Z'` does not match `'AtoZ'`, although `'A(?:.*)Z'` does. Using the atomic group, `Z` is captured using `.*` and is not rescanned.
`(expr1|expr2)`	Match expression `expr1` or expression `expr2`.	`'(let|tel)\w+'` matches words that start with `let` or `tel`.

Grouping Operator	Description	Example
	If there is a match with `expr1`, then `expr2` is ignored. You can include `?:` or `?>` after the opening parenthesis to suppress tokens or group atomically.	

Anchors

Anchors in the expression match the beginning or end of the input text or word.

Anchor	Matches the...	Example
`^expr`	Beginning of the input text.	`'^M\w*'` matches a word starting with `M` at the beginning of the text.
`expr$`	End of the input text.	`'\w*m$'` matches words ending with `m` at the end of the text.
`\<expr`	Beginning of a word.	`'\<n\w*'` matches any words starting with `n`.
`expr\>`	End of a word.	`'\w*e\>'` matches any words ending with `e`.

Lookaround Assertions

Lookaround assertions look for patterns that immediately precede or follow the intended match, but are not part of the match.

The pointer remains at the current location, and characters that correspond to the `test` expression are not captured or discarded. Therefore, lookahead assertions can match overlapping character groups.

Lookaround Assertion	Description	Example
`expr(?=test)`	Look ahead for characters that match `test`.	`'\w*(?=ing)'` matches terms that are followed by `ing`, such as `'Fly'` and `'fall'` in the input text `'Flying, not falling.'`

Lookaround Assertion	Description	Example
`expr(?!test)`	Look ahead for characters that do not match `test`.	`'i(?!ng)'` matches instances of the letter `i` that are not followed by `ng`.
`(?<=test)expr`	Look behind for characters that match `test`.	`'(?<=re)\w*'` matches terms that follow `'re'`, such as `'new'`, `'use'`, and `'cycle'` in the input text `'renew, reuse, recycle'`
`(?<!test)expr`	Look behind for characters that do not match `test`.	`'(?<!\d)(\d)(?!\d)'` matches single-digit numbers (digits that do not precede or follow other digits).

If you specify a lookahead assertion *before* an expression, the operation is equivalent to a logical `AND`.

Operation	Description	Example
`(?=test)expr`	Match both `test` and `expr`.	`'(?=[a-z])[^aeiou]'` matches consonants.
`(?!test)expr`	Match `expr` and do not match `test`.	`'(?![aeiou])[a-z]'` matches consonants.

Logical and Conditional Operators

Logical and conditional operators allow you to test the state of a given condition, and then use the outcome to determine which pattern, if any, to match next. These operators support logical `OR`, and `if` or `if/else` conditions.

Conditions can be tokens, lookaround operators, or dynamic expressions of the form `(?@cmd)`. Dynamic expressions must return a logical or numeric value.

Conditional Operator	Description	Example
`expr1|expr2`	Match expression `expr1` or expression `expr2`. If there is a match with `expr1`, then `expr2` is ignored.	`'(let|tel)\w+'` matches words that start with `let` or `tel`.

Conditional Operator	Description	Example
`(?(cond)expr)`	If condition `cond` is `true`, then match `expr`.	`'(?(?@ispc)[A-Z]:\\)'` matches a drive name, such as `C:\`, when run on a Windows system.
`(?(cond)expr1|expr2)`	If condition `cond` is `true`, then match `expr1`. Otherwise, match `expr2`.	`'Mr(s?)\..*?(?(1)her|his)\w*'` matches text that includes `her` when the text begins with `Mrs`, or that includes `his` when the text begins with `Mr`.

Token Operators

Tokens are portions of the matched text that you define by enclosing part of the regular expression in parentheses. You can refer to a token by its sequence in the text (an ordinal token), or assign names to tokens for easier code maintenance and readable output.

Ordinal Token Operator	Description	Example
`(expr)`	Capture in a token the characters that match the enclosed expression.	`'Joh?n\s(\w*)'` captures a token that contains the last name of any person with the first name `John` or `Jon`.
`\N`	Match the `N`th token.	`'<(\w+).*>.*</\1>'` captures tokens for HTML tags, such as `'title'` from the text `'<title>Some text</title>'`.
`(?(N)expr1|expr2)`	If the `N`th token is found, then match `expr1`. Otherwise, match `expr2`.	`'Mr(s?)\..*?(?(1)her|his)\w*'` matches text that includes `her` when the text begins with `Mrs`, or that includes `his` when the text begins with `Mr`.

Named Token Operator	Description	Example
`(?<name>expr)`	Capture in a named token the characters that match the enclosed expression.	`'(?<month>\d+)-(?<day>\d+)-(?<yr>\d+)'` creates named tokens for the month, day, and year in an input date of the form `mm-dd-yy`.

Named Token Operator	Description	Example
`\k<name>`	Match the token referred to by `name`.	`'<(?<tag>\w+).*>.*</\k<tag>>'` captures tokens for HTML tags, such as `'title'` from the text `'<title>Some text</title>'`.
`(?(name)expr1|expr2)`	If the named token is found, then match `expr1`. Otherwise, match `expr2`.	`'Mr(?<sex>s?)\..*?(?(sex)her|his) \w*'` matches text that includes `her` when the text begins with `Mrs`, or that includes `his` when the text begins with `Mr`.

Note: If an expression has nested parentheses, MATLAB captures tokens that correspond to the outermost set of parentheses. For example, given the search pattern `'(and(y|rew))'`, MATLAB creates a token for `'andrew'` but not for `'y'` or `'rew'`.

Dynamic Regular Expressions

Dynamic expressions allow you to execute a MATLAB command or a regular expression to determine the text to match.

The parentheses that enclose dynamic expressions do *not* create a capturing group.

Operator	Description	Example
`(??expr)`	Parse `expr` and include the resulting term in the match expression. When parsed, `expr` must correspond to a complete, valid regular expression. Dynamic expressions that use the backslash escape character (\) require two backslashes: one for the initial parsing of `expr`, and one for the complete match.	`'^(\d+)((??\\w{$1}))'` determines how many characters to match by reading a digit at the beginning of the match. The dynamic expression is enclosed in a second set of parentheses so that the resulting match is captured in a token. For instance, matching `'5XXXXX'` captures tokens for `'5'` and `'XXXXX'`.
`(??@cmd)`	Execute the MATLAB command represented by `cmd`, and include the	`'(.{2,}).?(??@fliplr($1))'` finds palindromes that are at least four characters long, such as `'abba'`.

Operator	Description	Example
	output returned by the command in the match expression.	
`(?@cmd)`	Execute the MATLAB command represented by `cmd`, but discard any output the command returns. (Helpful for diagnosing regular expressions.)	`'\w*?(\w)(?@disp($1))\1\w*'` matches words that include double letters (such as `pp`), and displays intermediate results.

Within dynamic expressions, use the following operators to define replacement text.

Replacement Operator	Description
`$&` or `$0`	Portion of the input text that is currently a match
`$` `	Portion of the input text that precedes the current match
`$'`	Portion of the input text that follows the current match (use `$''` to represent `$'`)
`$N`	`N`th token
`$<name>`	Named token
`${cmd}`	Output returned when MATLAB executes the command, `cmd`

Comments

Characters	Description	Example
`(?#comment)`	Insert a comment in the regular expression. The comment text is ignored when matching the input.	`'(?# Initial digit)\<\d\w+'` includes a comment, and matches words that begin with a number.

Search Flags

Search flags modify the behavior for matching expressions. An alternative to using a search flag within an expression is to pass an `option` input argument.

Flag	Description
`(?-i)`	Match letter case (default for `regexp` and `regexprep`).
`(?i)`	Do not match letter case (default for `regexpi`).
`(?s)`	Match dot (`.`) in the pattern with any character (default).

Flag	Description
`(?-s)`	Match dot in the pattern with any character that is not a newline character.
`(?-m)`	Match the ^ and $ metacharacters at the beginning and end of text (default).
`(?m)`	Match the ^ and $ metacharacters at the beginning and end of a line.
`(?-x)`	Include space characters and comments when matching (default).
`(?x)`	Ignore space characters and comments when matching. Use `'\ '` and `'\#'` to match space and # characters.

The expression that the flag modifies can appear either after the parentheses, such as

```
(?i)\w*
```

or inside the parentheses and separated from the flag with a colon (`:`), such as

```
(?i:\w*)
```

The latter syntax allows you to change the behavior for part of a larger expression.

Data Types: `char` | `cell` | `string`

`outkey` — Keyword that indicates which outputs to return

`'start'` (default) | `'end'` | `'tokenExtents'` | `'match'` | `'tokens'` | `'names'` | `'split'`

Keyword that indicates which outputs to return, specified as one of the following character vectors.

Output Keyword	Returns
`'start'` (default)	Starting indices of all matches, `startIndex`
`'end'`	Ending indices of all matches, `endIndex`
`'tokenExtents'`	Starting and ending indices of all tokens
`'match'`	Text of each substring that matches the pattern in `expression`
`'tokens'`	Text of each captured token in `str`
`'names'`	Name and text of each named token
`'split'`	Text of nonmatching substrings of `str`

Data Types: `char` | `string`

`option` — Search option
`'once'` | `'warnings'` | `'ignorecase'` | `'emptymatch'` | `'dotexceptnewline'` | `'lineanchors'` | ...

Search option, specified as a character vector. Options come in pairs: one option that corresponds to the default behavior, and one option that allows you to override the default. Specify only one option from a pair. Options can appear in any order.

Default	Override	Description
`'all'`	`'once'`	Match the expression as many times as possible (default), or only once.
`'nowarnings'`	`'warnings'`	Suppress warnings (default), or display them.
`'matchcase'`	`'ignorecase'`	Match letter case (default), or ignore case.
`'noemptymatch'`	`'emptymatch'`	Ignore zero length matches (default), or include them.
`'dotall'`	`'dotexceptnewline'`	Match dot with any character (default), or all except newline (`\n`).
`'stringanchors'`	`'lineanchors'`	Apply `^` and `$` metacharacters to the beginning and end of a character vector (default), or to the beginning and end of a line.
`'literalspacing'`	`'freespacing'`	Include space characters and comments when matching (default), or ignore them. With `freespacing`, use `'\ '` and `'\#'` to match space and # characters.

Data Types: `char` | `string`

Output Arguments

`startIndex` — Starting index of each match
row vector | cell array of row vectors

Starting indices of each match, returned as a row vector or cell array, as follows:

- If `str` and `expression` are both character vectors or string scalars, the output is a row vector (or, if there are no matches, an empty array).

- If either `str` or `expression` is a cell array of character vectors or a string array, and the other is a character vector or a string scalar, the output is a cell array of row vectors. The output cell array has the same dimensions as the input array.
- If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions.

`endIndex` — Ending index of each match

row vector | cell array of row vectors

Ending index of each match, returned as a row vector or cell array, as follows:

- If `str` and `expression` are both character vectors or string scalars, the output is a row vector (or, if there are no matches, an empty array).
- If either `str` or `expression` is a cell array of character vectors or a string array, and the other is a character vector or a string scalar, the output is a cell array of row vectors. The output cell array has the same dimensions as the input array.
- If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions.

`out` — Information about matches

numeric array | cell array | string array | structure array

Information about matches, returned as a numeric, cell, string, or structure array. The information in the output depends upon the value you specify for `outkey`, as follows.

Output Keyword	Output Description	Output Type and Dimensions
`'start'`	Starting indices of matches	For both `'start'` and `'end'`: • If `str` and `expression` are both character vectors or string scalars, the output is a row vector (or, if there are no matches, an empty array). • If either `str` or `expression` is a cell array of character vectors or a string array, and the other is a character vector or a string scalar, the output is a cell array of row vectors. The output cell array has the same dimensions as the input array. • If `str` and `expression` are both cell arrays or string arrays, they must have the same
`'end'`	Ending indices of matches	

Output Keyword	Output Description	Output Type and Dimensions
		dimensions. The output is a cell array with the same dimensions.
`'tokenExtents'`	Starting and ending indices of all tokens	By default, when returning all matches: • If `str` and `expression` are both character vectors or string scalars, the output is a 1-by-`n` cell array, where `n` is the number of matches. Each cell contains an `m`-by-2 numeric array of indices, where `m` is the number of tokens in the match. • If either `str` or `expression` is a cell array of character vectors or a string array, the output is a cell array with the same dimensions as the input array. Each cell contains a 1-by-`n` cell array, where each inner cell contains an `m`-by-2 numeric array. • If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions. When you specify the `'once'` option to return only one match, the output is either an `m`-by-2 numeric array or a cell array with the same dimensions as `str` and/or `expression`. If a token is expected at a particular index `N`, but is not found, then MATLAB returns extents for that token of `[N,N-1]`.

Output Keyword	Output Description	Output Type and Dimensions
`'match'`	Text of each substring that matches the pattern in `expression`	By default, when returning all matches: • If `str` and `expression` are both character vectors or string scalars, the output is a 1-by-`n` array, where `n` is the number of matches. If `str` is a character vector, then the output is a cell array of character vectors. If `str` is a string scalar, then the output is a string array. • If either `str` or `expression` is a cell array of character vectors or a string array, the output is a cell array with the same dimensions as the input array. If `str` is a cell array of character vectors, then so is the output. If `str` is a string array, then the output is a cell array in which each cell contains a string array. • If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions. If `str` is a cell array of character vectors, then so is the output. If `str` is a string array, then the output is a cell array in which each cell contains a string array. When you specify the `'once'` option to return only one match, the output is either a character vector, a string array, or a cell array with the same dimensions as `str` and `expression`.

Output Keyword	Output Description	Output Type and Dimensions
`'tokens'`	Text of each captured token in `str`	By default, when returning all matches: • If `str` and `expression` are both character vectors or string scalars, the output is a 1-by-`n` cell array, where `n` is the number of matches. Each cell contains a 1-by-`m` cell array of matches, where `m` is the number of tokens in the match. If `str` is a character vector, then the output is a cell array of character vectors. If `str` is a string array, then the output is a cell array in which each cell contains a string array. • If either `str` or `expression` is a cell array of character vectors or a string array, the output is a cell array with the same dimensions as the input array. Each cell contains a 1-by-`n` cell array, where each inner cell contains a 1-by-`m` array. If `str` is a cell array of character vectors, then each inner cell contains a 1-by-`m` cell array. If `str` is a string aray, then each inner cell contains a 1-by-`m` string array. • If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions. If `str` is a cell array of character vectors, then so is the output. If `str` is a string array, then the output is a cell array in which the innermost cells contain string arrays. When you specify the `'once'` option to return only one match, the output is a 1-by-`m` string array, cell array of character vectors, or a cell array that has the same dimensions as `str` and/or `expression`.

Output Keyword	Output Description	Output Type and Dimensions
		If a token is expected at a particular index, but is not found, then MATLAB returns an empty value for the token, `''` for character vectors, or `""` for strings.
`'names'`	Name and text of each named token	For all matches: • If `str` and `expression` are both character vectors or string scalars, the output is a 1-by-`n` structure array, where `n` is the number of matches. The structure field names correspond to the token names. • If `str` or `expression` is a cell array of character vectors or a string array, the output is a cell array with the same dimensions as the input array. Each cell contains a 1-by-`n` structure array. • If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions.

Output Keyword	Output Description	Output Type and Dimensions
`'split'`	Text of nonmatching substrings of `str`	For all matches: • If `str` and `expression` are both character vectors or string scalars, the output is a 1-by-`n` array, where `n` is the number of nonmatches. If `str` is a character vector, then the output is a cell array of character vectors. If `str` is a string scalar, then the output is a string array. • If either `str` or `expression` is a cell array of character vectors or a string array, the output is a cell array with the same dimensions as the input array. Each cell contains a 1-by-`n` cell array of character vectors. If `str` is a cell array of character vectors, then so is the output. If `str` is a string array, then the output is a cell array in which each cell contains a string array. • If `str` and `expression` are both cell arrays, they must have the same dimensions. The output is a cell array with the same dimensions. If `str` is a cell array of character vectors, then so is the output. If `str` is a string array, then the output is a cell array in which each cell contains a string array.

Definitions

Tokens

Tokens are portions of the matched text that correspond to portions of the regular expression. To create tokens, enclose part of the regular expression in parentheses.

For example, this expression finds a date of the form `dd-mmm-yyyy`, including tokens for the day, month, and year.

```
str = 'Here is a date: 01-Apr-2020';
expression = '(\d+)-(\w+)-(\d+)';

mydate = regexp(str,expression,'tokens');
mydate{:}
```

```
ans =
    '01'    'April'    '2020'
```

You can associate names with tokens so that they are more easily identifiable:

```
str = 'Here is a date: 01-Apr-2020';
expression = '(?<day>\d+)-(?<month>\w+)-(?<year>\d+)';

mydate = regexp(str,expression,'names')
```

```
mydate =
      day: '01'
    month: 'Apr'
     year: '2020'
```

For more information, see “Tokens in Regular Expressions”.

Tips

- Use `contains` or `strfind` to find an exact character match within text. Use `regexp` to look for a pattern of characters.

Algorithms

MATLAB parses each input character vector or string from left to right, attempting to match the text in the character vector or string with the first element of the regular expression. During this process, MATLAB skips over any text that does not match.

When MATLAB finds the first match, it continues parsing to match the second piece of the expression, and so on.

See Also

See Also

`contains` | `regexpi` | `regexprep` | `regexptranslate` | `replace` | `strfind` | `strjoin` | `strrep` | `strsplit`

Topics

"Regular Expressions"
"Lookahead Assertions in Regular Expressions"
"Dynamic Regular Expressions"

Introduced before R2006a

regexpi

Match regular expression (case insensitive)

Syntax

```
startIndex = regexpi(str,expression)
[startIndex,endIndex] = regexpi(str,expression)
```

```
out = regexpi(str,expression,outkey)
[out1,...,outN] = regexpi(str,expression,outkey1,...,outkeyN)
```

```
___ = regexpi(___,option1,...,optionM)
```

```
___ = regexpi(___,'forceCellOutput')
```

Description

`startIndex = regexpi(str,expression)` returns the starting index of each substring of `str` that matches the character patterns specified by the regular expression, without regard to letter case. If there are no matches, `startIndex` is an empty array.

`[startIndex,endIndex] = regexpi(str,expression)` returns the starting and ending indices of all matches.

`out = regexpi(str,expression,outkey)` returns the output specified by `outkey`. For example, if `outkey` is `'match'`, then `regexpi` returns the substrings that match the expression rather than their starting indices.

`[out1,...,outN] = regexpi(str,expression,outkey1,...,outkeyN)` returns the outputs specified by multiple output keywords, in the specified order. For example, if you specify `'match','tokens'`, then `regexpi` returns substrings that match the entire expression and tokens that match parts of the expression.

`___ = regexpi(___,option1,...,optionM)` modifies the search using the specified option flags. For example, specify `'matchcase'` to perform a case-sensitive match. You can include any of the inputs and request any of the outputs from previous syntaxes.

`___ = regexpi(___,'forceCellOutput')` returns each output argument as a scalar cell. The cells contain the numeric arrays or substrings that are described as the outputs of the previous syntaxes. You can include any of the inputs and request any of the outputs from previous syntaxes.

Examples

Pattern Matching

Find words that start with `c`, end with `t`, and contain one or more vowels between them.

```
str = 'bat cat can car COAT court cut ct CAT-scan';
expression = 'c[aeiou]+t';
startIndex = regexpi(str,expression)
```

```
startIndex =

     5    17    28    35
```

Values in `startIndex` indicate the index of the first character of each word that matches the regular expression.

The regular expression `'c[aeiou]+t'` specifies this pattern:

- `c` must be the first character.
- `c` must be followed by one of the characters inside the brackets, `[aeiou]`.
- The bracketed pattern must occur one or more times, as indicated by the `+` operator.
- `t` must be the last character, with no characters between the bracketed pattern and the `t`.

Case-Sensitive Match

Match letter case in all or part of an expression.

By default, `regexpi` performs case-insensitive matching.

```
str = 'A character vector with UPPERCASE and lowercase text.';
expression = '\w*case';
matchStr = regexpi(str,expression,'match')
```

```
matchStr = 1×2 cell array
    'UPPERCASE'    'lowercase'
```

Use the `regexp` function with the same syntax as `regexpi` to perform case-sensitive matching.

```
matchWithRegexp = regexp(str,expression,'match')
```

```
matchWithRegexp = cell
    'lowercase'
```

To disable case-sensitive matching for `regexp`, use the `'ignorecase'` option.

```
matchWithIgnorecase = regexp(str,expression,'match','ignorecase')
```

```
matchWithIgnorecase = 1×2 cell array
    'UPPERCASE'    'lowercase'
```

For multiple expressions, enable and disable case-insensitive matching for selected expressions using the `(?i)` and `(?-i)` search flags.

```
expression = {'(?-i)\w*case';...
              '(?i)\w*case'};
matchStr = regexp(str,expression,'match');
celldisp(matchStr)
```

```
matchStr{1}{1} =

lowercase


matchStr{2}{1} =

UPPERCASE


matchStr{2}{2} =

lowercase
```

Input Arguments

`str` — Input text

character vector | cell array of character vectors | string array

Input text, specified as a character vector, a cell array of character vectors, or a string array. Each character vector in a cell array, or each string in a string array, can be of any length and contain any characters.

If `str` and `expression` are string arrays or cell arrays, they must have the same dimensions.

Data Types: `string` | `char` | `cell`

`expression` — Regular expression

character vector | cell array of character vectors | string array

Regular expression, specified as a character vector, a cell array of character vectors, or a string array. Each expression can contain characters, metacharacters, operators, tokens, and flags that specify patterns to match in `str`.

The following tables describe the elements of regular expressions.

Metacharacters

Metacharacters represent letters, letter ranges, digits, and space characters. Use them to construct a generalized pattern of characters.

Metacharacter	Description	Example
`.`	Any single character, including white space	`'..ain'` matches sequences of five consecutive characters that end with `'ain'`.
`[`$c_1c_2c_3$`]`	Any character contained within the brackets. The following characters are treated literally: `$ | . * + ?` and `-` when not used to indicate a range.	`'[rp.]ain'` matches `'rain'` or `'pain'` or ‘`.ain`’.
`[^`$c_1c_2c_3$`]`	Any character not contained within the brackets. The following characters are treated literally: `$`	`'[^*rp]ain'` matches all four-letter sequences that end in `'ain'`, except `'rain'` and `'pain'` and ‘`*ain`’. For

Metacharacter	Description	Example
	`|` `.` `*` `+` `?` and `-` when not used to indicate a range.	example, it matches `'gain'`, `'lain'`, or `'vain'`.
`[c1-c2]`	Any character in the range of c_1 through c_2	`'[A-G]'` matches a single character in the range of `A` through `G`.
`\w`	Any alphabetic, numeric, or underscore character. For English character sets, `\w` is equivalent to `[a-zA-Z_0-9]`	`'\w*'` identifies a word.
`\W`	Any character that is not alphabetic, numeric, or underscore. For English character sets, `\W` is equivalent to `[^a-zA-Z_0-9]`	`'\W*'` identifies a term that is not a word.
`\s`	Any white-space character; equivalent to `[ \f\n\r\t\v]`	`'\w*n\s'` matches words that end with the letter `n`, followed by a white-space character.
`\S`	Any non-white-space character; equivalent to `[^ \f\n\r\t\v]`	`'\d\S'` matches a numeric digit followed by any non-white-space character.
`\d`	Any numeric digit; equivalent to `[0-9]`	`'\d*'` matches any number of consecutive digits.
`\D`	Any nondigit character; equivalent to `[^0-9]`	`'\w*\D\>'` matches words that do not end with a numeric digit.
`\oN` or `\o{N}`	Character of octal value `N`	`'\o{40}'` matches the space character, defined by octal `40`.
`\xN` or `\x{N}`	Character of hexadecimal value `N`	`'\x2C'` matches the comma character, defined by hex `2C`.

Character Representation

Operator	Description
`\a`	Alarm (beep)
`\b`	Backspace
`\f`	Form feed
`\n`	New line

Operator	Description
`\r`	Carriage return
`\t`	Horizontal tab
`\v`	Vertical tab
`\char`	Any character with special meaning in regular expressions that you want to match literally (for example, use `\\` to match a single backslash)

Quantifiers

Quantifiers specify the number of times a pattern must occur in the matching text.

Quantifier	Matches the expression when it occurs...	Example
`expr*`	0 or more times consecutively.	`'\w*'` matches a word of any length.
`expr?`	0 times or 1 time.	`'\w*(\.m)?'` matches words that optionally end with the extension `.m`.
`expr+`	1 or more times consecutively.	`'<img src="\w+\.gif">'` matches an `<img>` HTML tag when the file name contains one or more characters.
`expr{m,n}`	At least `m` times, but no more than `n` times consecutively. `{0,1}` is equivalent to `?`.	`'\S{4,8}'` matches between four and eight non-white-space characters.
`expr{m,}`	At least `m` times consecutively. `{0,}` and `{1,}` are equivalent to `*` and `+`, respectively.	`'<a href="\w{1,}\.html">'` matches an `<a>` HTML tag when the file name contains one or more characters.
`expr{n}`	Exactly `n` times consecutively. Equivalent to `{n,n}`.	`'\d{4}'` matches four consecutive digits.

Quantifiers can appear in three modes, described in the following table. *q* represents any of the quantifiers in the previous table.

Mode	Description	Example
`expr`*q*	Greedy expression: match as many characters as possible.	Given the text `'<tr><td><p>text</p></td>'`, the

Mode	Description	Example
		expression `'</?t.*>'` matches all characters between `<tr` and `/td>`: `'<tr><td><p>text</p></td>'`
`expr`*q*`?`	Lazy expression: match as few characters as necessary.	Given the text`'<tr><td><p>text</p></td>'`, the expression `'</?t.*?>'` ends each match at the first occurrence of the closing bracket (`>`): `'<tr>'  '<td>'  '</td>'`
`expr`*q*`+`	Possessive expression: match as much as possible, but do not rescan any portions of the text.	Given the text`'<tr><td><p>text</p></td>'`, the expression `'</?t.*+>'` does not return any matches, because the closing bracket is captured using `.*`, and is not rescanned.

Grouping Operators

Grouping operators allow you to capture tokens, apply one operator to multiple elements, or disable backtracking in a specific group.

Grouping Operator	Description	Example
`(expr)`	Group elements of the expression and capture tokens.	`'Joh?n\s(\w*)'` captures a token that contains the last name of any person with the first name `John` or `Jon`.
`(?:expr)`	Group, but do not capture tokens.	`'(?:[aeiou][^aeiou]){2}'` matches two consecutive patterns of a vowel followed by a nonvowel, such as `'anon'`. Without grouping, `'[aeiou][^aeiou]{2}'` matches a vowel followed by two nonvowels.
`(?>expr)`	Group atomically. Do not backtrack within the group to complete the match, and do not capture tokens.	`'A(?>.*)Z'` does not match `'AtoZ'`, although `'A(?:.*)Z'` does. Using the

Grouping Operator	Description	Example
		atomic group, Z is captured using `.*` and is not rescanned.
`(expr1|expr2)`	Match expression `expr1` or expression `expr2`. If there is a match with `expr1`, then `expr2` is ignored. You can include `?:` or `?>` after the opening parenthesis to suppress tokens or group atomically.	`'(let|tel)\w+'` matches words that start with `let` or `tel`.

Anchors

Anchors in the expression match the beginning or end of the input text or word.

Anchor	Matches the...	Example
`^expr`	Beginning of the input text.	`'^M\w*'` matches a word starting with `M` at the beginning of the text.
`expr$`	End of the input text.	`'\w*m$'` matches words ending with `m` at the end of the text.
`\<expr`	Beginning of a word.	`'\<n\w*'` matches any words starting with `n`.
`expr\>`	End of a word.	`'\w*e\>'` matches any words ending with `e`.

Lookaround Assertions

Lookaround assertions look for patterns that immediately precede or follow the intended match, but are not part of the match.

The pointer remains at the current location, and characters that correspond to the `test` expression are not captured or discarded. Therefore, lookahead assertions can match overlapping character groups.

Lookaround Assertion	Description	Example
`expr(?=test)`	Look ahead for characters that match `test`.	`'\w*(?=ing)'` matches terms that are followed by `ing`, such as `'Fly'` and `'fall'` in the input text `'Flying, not falling.'`
`expr(?!test)`	Look ahead for characters that do not match `test`.	`'i(?!ng)'` matches instances of the letter `i` that are not followed by `ng`.
`(?<=test)expr`	Look behind for characters that match `test`.	`'(?<=re)\w*'` matches terms that follow `'re'`, such as `'new'`, `'use'`, and `'cycle'` in the input text `'renew, reuse, recycle'`
`(?<!test)expr`	Look behind for characters that do not match `test`.	`'(?<!\d)(\d)(?!\d)'` matches single-digit numbers (digits that do not precede or follow other digits).

If you specify a lookahead assertion *before* an expression, the operation is equivalent to a logical `AND`.

Operation	Description	Example
`(?=test)expr`	Match both `test` and `expr`.	`'(?=[a-z])[^aeiou]'` matches consonants.
`(?!test)expr`	Match `expr` and do not match `test`.	`'(?![aeiou])[a-z]'` matches consonants.

Logical and Conditional Operators

Logical and conditional operators allow you to test the state of a given condition, and then use the outcome to determine which pattern, if any, to match next. These operators support logical `OR`, and `if` or `if/else` conditions.

Conditions can be tokens, lookaround operators, or dynamic expressions of the form `(?@cmd)`. Dynamic expressions must return a logical or numeric value.

Conditional Operator	Description	Example
`expr1|expr2`	Match expression `expr1` or expression `expr2`.	`'(let|tel)\w+'` matches words that start with `let` or `tel`.

Conditional Operator	Description	Example
	If there is a match with `expr1`, then `expr2` is ignored.	
`(?(cond)expr)`	If condition `cond` is `true`, then match `expr`.	`'(?(?@ispc)[A-Z]:\\)'` matches a drive name, such as `C:\`, when run on a Windows system.
`(?(cond)expr1|expr2)`	If condition `cond` is `true`, then match `expr1`. Otherwise, match `expr2`.	`'Mr(s?)\..*?(?(1)her|his)\w*'` matches text that includes `her` when the text begins with `Mrs`, or that includes `his` when the text begins with `Mr`.

Token Operators

Tokens are portions of the matched text that you define by enclosing part of the regular expression in parentheses. You can refer to a token by its sequence in the text (an ordinal token), or assign names to tokens for easier code maintenance and readable output.

Ordinal Token Operator	Description	Example
`(expr)`	Capture in a token the characters that match the enclosed expression.	`'Joh?n\s(\w*)'` captures a token that contains the last name of any person with the first name `John` or `Jon`.
`\N`	Match the `N`th token.	`'<(\w+).*>.*</\1>'` captures tokens for HTML tags, such as `'title'` from the text `'<title>Some text</title>'`.
`(?(N)expr1|expr2)`	If the `N`th token is found, then match `expr1`. Otherwise, match `expr2`.	`'Mr(s?)\..*?(?(1)her|his)\w*'` matches text that includes `her` when the text begins with `Mrs`, or that includes `his` when the text begins with `Mr`.

Named Token Operator	Description	Example
`(?<name>expr)`	Capture in a named token the characters that match the enclosed expression.	`'(?<month>\d+)-(?<day>\d+)-(?<yr>\d+)'` creates named tokens for the month, day, and year in an input date of the form `mm-dd-yy`.

Named Token Operator	Description	Example
`\k<name>`	Match the token referred to by `name`.	`'<(?<tag>\w+).*>.*</\k<tag>>'` captures tokens for HTML tags, such as `'title'` from the text `'<title>Some text</title>'`.
`(?(name)expr1|expr2)`	If the named token is found, then match `expr1`. Otherwise, match `expr2`.	`'Mr(?<sex>s?)\..*?(?(sex)her|his) \w*'` matches text that includes `her` when the text begins with `Mrs`, or that includes `his` when the text begins with `Mr`.

Note: If an expression has nested parentheses, MATLAB captures tokens that correspond to the outermost set of parentheses. For example, given the search pattern `'(and(y|rew))'`, MATLAB creates a token for `'andrew'` but not for `'y'` or `'rew'`.

Dynamic Regular Expressions

Dynamic expressions allow you to execute a MATLAB command or a regular expression to determine the text to match.

The parentheses that enclose dynamic expressions do *not* create a capturing group.

Operator	Description	Example
`(??expr)`	Parse `expr` and include the resulting term in the match expression. When parsed, `expr` must correspond to a complete, valid regular expression. Dynamic expressions that use the backslash escape character (\) require two backslashes: one for the initial parsing of `expr`, and one for the complete match.	`'^(\d+)((??\\w{$1}))'` determines how many characters to match by reading a digit at the beginning of the match. The dynamic expression is enclosed in a second set of parentheses so that the resulting match is captured in a token. For instance, matching `'5XXXXX'` captures tokens for `'5'` and `'XXXXX'`.
`(??@cmd)`	Execute the MATLAB command represented by `cmd`, and include the	`'(.{2,}).?(??@fliplr($1))'` finds palindromes that are at least four characters long, such as `'abba'`.

Operator	Description	Example
	output returned by the command in the match expression.	
`(?@cmd)`	Execute the MATLAB command represented by `cmd`, but discard any output the command returns. (Helpful for diagnosing regular expressions.)	`'\w*?(\w)(?@disp($1))\1\w*'` matches words that include double letters (such as `pp`), and displays intermediate results.

Within dynamic expressions, use the following operators to define replacement text.

Replacement Operator	Description
`$&` or `$0`	Portion of the input text that is currently a match
`$\``	Portion of the input text that precedes the current match
`$'`	Portion of the input text that follows the current match (use `$''` to represent `$'`)
`$N`	`N`th token
`$<name>`	Named token
`${cmd}`	Output returned when MATLAB executes the command, `cmd`

Comments

Characters	Description	Example
`(?#comment)`	Insert a comment in the regular expression. The comment text is ignored when matching the input.	`'(?# Initial digit)\<\d\w+'` includes a comment, and matches words that begin with a number.

Search Flags

Search flags modify the behavior for matching expressions. An alternative to using a search flag within an expression is to pass an `option` input argument.

Flag	Description
`(?-i)`	Match letter case (default for `regexp` and `regexprep`).
`(?i)`	Do not match letter case (default for `regexpi`).
`(?s)`	Match dot (`.`) in the pattern with any character (default).

Flag	Description
`(?-s)`	Match dot in the pattern with any character that is not a newline character.
`(?-m)`	Match the ^ and $ metacharacters at the beginning and end of text (default).
`(?m)`	Match the ^ and $ metacharacters at the beginning and end of a line.
`(?-x)`	Include space characters and comments when matching (default).
`(?x)`	Ignore space characters and comments when matching. Use `'\ '` and `'\#'` to match space and # characters.

The expression that the flag modifies can appear either after the parentheses, such as

```
(?i)\w*
```

or inside the parentheses and separated from the flag with a colon (`:`), such as

```
(?i:\w*)
```

The latter syntax allows you to change the behavior for part of a larger expression.

Data Types: `char` | `cell` | `string`

`outkey` — Keyword that indicates which outputs to return

`'start'` (default) | `'end'` | `'tokenExtents'` | `'match'` | `'tokens'` | `'names'` | `'split'`

Keyword that indicates which outputs to return, specified as one of the following character vectors.

Output Keyword	Returns
`'start'` (default)	Starting indices of all matches, `startIndex`
`'end'`	Ending indices of all matches, `endIndex`
`'tokenExtents'`	Starting and ending indices of all tokens
`'match'`	Text of each substring that matches the pattern in `expression`
`'tokens'`	Text of each captured token in `str`
`'names'`	Name and text of each named token
`'split'`	Text of nonmatching substrings of `str`

Data Types: `char` | `string`

`option` — Search option
`'once'` | `'warnings'` | `'matchcase'` | `'emptymatch'` | `'dotexceptnewline'` | `'lineanchors'` | ...

Search option, specified as a character vector. Options come in pairs: one option that corresponds to the default behavior, and one option that allows you to override the default. Specify only one option from a pair. Options can appear in any order.

Default	Override	Description
`'all'`	`'once'`	Match the expression as many times as possible (default), or only once.
`'nowarnings'`	`'warnings'`	Suppress warnings (default), or display them.
`'ignorecase'`	`'matchcase'`	Ignore letter case (default), or match case.
`'noemptymatch'`	`'emptymatch'`	Ignore zero length matches (default), or include them.
`'dotall'`	`'dotexceptnewline'`	Match dot with any character (default), or all except newline (`\n`).
`'stringanchors'`	`'lineanchors'`	Apply `^` and `$` metacharacters to the beginning and end of a character vector (default), or to the beginning and end of a line.
`'literalspacing'`	`'freespacing'`	Include space characters and comments when matching (default), or ignore them. With `freespacing`, use `'\ '` and `'\#'` to match space and # characters.

Data Types: `char`

Output Arguments

`startIndex` — Starting index of each match
row vector | cell array of row vectors

Starting indices of each match, returned as a row vector or cell array, as follows:

- If `str` and `expression` are both character vectors or string scalars, the output is a row vector (or, if there are no matches, an empty array).

- If either `str` or `expression` is a cell array of character vectors or a string array, and the other is a character vector or a string scalar, the output is a cell array of row vectors. The output cell array has the same dimensions as the input array.
- If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions.

`endIndex` — Ending index of each match

row vector | cell array of row vectors

Ending index of each match, returned as a row vector or cell array, as follows:

- If `str` and `expression` are both character vectors or string scalars, the output is a row vector (or, if there are no matches, an empty array).
- If either `str` or `expression` is a cell array of character vectors or a string array, and the other is a character vector or a string scalar, the output is a cell array of row vectors. The output cell array has the same dimensions as the input array.
- If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions.

`out` — Information about matches

numeric array | cell array | string array | structure array

Information about matches, returned as a numeric, cell, string, or structure array. The information in the output depends upon the value you specify for `outkey`, as follows.

Output Keyword	Output Description	Output Type and Dimensions
`'start'`	Starting indices of matches	For both `'start'` and `'end'`: • If `str` and `expression` are both character vectors or string scalars, the output is a row vector (or, if there are no matches, an empty array). • If either `str` or `expression` is a cell array of character vectors or a string array, and the other is a character vector or a string scalar, the output is a cell array of row vectors. The output cell array has the same dimensions as the input array. • If `str` and `expression` are both cell arrays or string arrays, they must have the same
`'end'`	Ending indices of matches	

Output Keyword	Output Description	Output Type and Dimensions
		dimensions. The output is a cell array with the same dimensions.
`'tokenExtents'`	Starting and ending indices of all tokens	By default, when returning all matches: • If `str` and `expression` are both character vectors or string scalars, the output is a 1-by-`n` cell array, where `n` is the number of matches. Each cell contains an `m`-by-2 numeric array of indices, where `m` is the number of tokens in the match. • If either `str` or `expression` is a cell array of character vectors or a string array, the output is a cell array with the same dimensions as the input array. Each cell contains a 1-by-`n` cell array, where each inner cell contains an `m`-by-2 numeric array. • If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions. When you specify the `'once'` option to return only one match, the output is either an `m`-by-2 numeric array or a cell array with the same dimensions as `str` and/or `expression`. If a token is expected at a particular index `N`, but is not found, then MATLAB returns extents for that token of `[N,N-1]`.

Output Keyword	Output Description	Output Type and Dimensions
`'match'`	Text of each substring that matches the pattern in `expression`	By default, when returning all matches: • If `str` and `expression` are both character vectors or string scalars, the output is a 1-by-`n` array, where `n` is the number of matches. If `str` is a character vector, then the output is a cell array of character vectors. If `str` is a string scalar, then the output is a string array. • If either `str` or `expression` is a cell array of character vectors or a string array, the output is a cell array with the same dimensions as the input array. If `str` is a cell array of character vectors, then so is the output. If `str` is a string array, then the output is a cell array in which each cell contains a string array. • If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions. If `str` is a cell array of character vectors, then so is the output. If `str` is a string array, then the output is a cell array in which each cell contains a string array. When you specify the `'once'` option to return only one match, the output is either a character vector, a string array, or a cell array with the same dimensions as `str` and `expression`.

Output Keyword	Output Description	Output Type and Dimensions
`'tokens'`	Text of each captured token in `str`	By default, when returning all matches: • If `str` and `expression` are both character vectors or string scalars, the output is a 1-by-`n` cell array, where `n` is the number of matches. Each cell contains a 1-by-`m` cell array of matches, where `m` is the number of tokens in the match. If `str` is a character vector, then the output is a cell array of character vectors. If `str` is a string array, then the output is a cell array in which each cell contains a string array. • If either `str` or `expression` is a cell array of character vectors or a string array, the output is a cell array with the same dimensions as the input array. Each cell contains a 1-by-`n` cell array, where each inner cell contains a 1-by-`m` array. If `str` is a cell array of character vectors, then each inner cell contains a 1-by-`m` cell array. If `str` is a string aray, then each inner cell contains a 1-by-`m` string array. • If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions. If `str` is a cell array of character vectors, then so is the output. If `str` is a string array, then the output is a cell array in which the innermost cells contain string arrays. When you specify the `'once'` option to return only one match, the output is a 1-by-`m` string array, cell array of character vectors, or a cell array that has the same dimensions as `str` and/or `expression`.

Output Keyword	Output Description	Output Type and Dimensions
		If a token is expected at a particular index, but is not found, then MATLAB returns an empty value for the token, `''` for character vectors, or `""` for strings.
`'names'`	Name and text of each named token	For all matches: • If `str` and `expression` are both character vectors or string scalars, the output is a 1-by-`n` structure array, where `n` is the number of matches. The structure field names correspond to the token names. • If `str` or `expression` is a cell array of character vectors or a string array, the output is a cell array with the same dimensions as the input array. Each cell contains a 1-by-`n` structure array. • If `str` and `expression` are both cell arrays or string arrays, they must have the same dimensions. The output is a cell array with the same dimensions.

Output Keyword	Output Description	Output Type and Dimensions
`'split'`	Text of nonmatching substrings of `str`	For all matches: • If `str` and `expression` are both character vectors or string scalars, the output is a 1-by-`n` array, where `n` is the number of nonmatches. If `str` is a character vector, then the output is a cell array of character vectors. If `str` is a string scalar, then the output is a string array. • If either `str` or `expression` is a cell array of character vectors or a string array, the output is a cell array with the same dimensions as the input array. Each cell contains a 1-by-`n` cell array of character vectors. If `str` is a cell array of character vectors, then so is the output. If `str` is a string array, then the output is a cell array in which each cell contains a string array. • If `str` and `expression` are both cell arrays, they must have the same dimensions. The output is a cell array with the same dimensions. If `str` is a cell array of character vectors, then so is the output. If `str` is a string array, then the output is a cell array in which each cell contains a string array.

Definitions

Tokens

Tokens are portions of the matched text that correspond to portions of the regular expression. To create tokens, enclose part of the regular expression in parentheses.

For example, this expression finds a date of the form `dd-mmm-yyyy`, including tokens for the day, month, and year.

```
str = 'Here is a date: 01-Apr-2020';
expression = '(\d+)-(\w+)-(\d+)';

mydate = regexp(str,expression,'tokens');
mydate{:}
```

```
ans =
    '01'    'April'    '2020'
```

You can associate names with tokens so that they are more easily identifiable:

```
str = 'Here is a date: 01-Apr-2020';
expression = '(?<day>\d+)-(?<month>\w+)-(?<year>\d+)';

mydate = regexp(str,expression,'names')
```

```
mydate =
      day: '01'
    month: 'Apr'
     year: '2020'
```

For more information, see “Tokens in Regular Expressions”.

See Also

See Also

`contains` | `regexp` | `regexprep` | `regexptranslate` | `replace` | `strfind` | `strjoin` | `strrep` | `strsplit`

Topics

“Lookahead Assertions in Regular Expressions”
“Dynamic Regular Expressions”

Introduced before R2006a

regexprep

Replace text using regular expression

Syntax

```
newStr = regexprep(str,expression,replace)
newStr = regexprep(str,expression,replace,option1,...optionM)
```

Description

`newStr = regexprep(str,expression,replace)` replaces the text in `str` that matches `expression` with the text described by `replace`. The `regexprep` function returns the updated text in `newStr`.

- If `str` is a single piece of text (either a character vector or a string scalar), then `newStr` is also a single piece of text of the same type. `newStr` is a single piece of text even when `expression` or `replace` is a cell array of character vectors or a string array. When `expression` is a cell array or a string array, `regexprep` applies the first expression to `str`, and then applies each subsequent expression to the preceding result.
- If `str` is a cell array or a string array, then `newStr` is a cell array or string array with the same dimensions as `str`. For each element of `str`, the `regexprep` function applies each expression in sequence.
- If there are no matches to `expression`, then `newStr` is equivalent to `str`.

`newStr = regexprep(str,expression,replace,option1,...optionM)` modifies the search using the specified options. For example, specify `'ignorecase'` to perform a case-insensitive match.

Examples

Update Text

Replace words that begin with `M`, end with `y`, and have at least one character between them.

```
str = 'My flowers may bloom in May';
expression = 'M(\w+)y';
replace = 'April';

newStr = regexprep(str,expression,replace)
```

```
newStr =
'My flowers may bloom in April'
```

Include Tokens in Replacement Text

Replace variations of the phrase `'walk up'` by capturing the letters that follow `'walk'` in a token.

```
str = 'I walk up, they walked up, we are walking up.';
expression = 'walk(\w*) up';
replace = 'ascend$1';

newStr = regexprep(str,expression,replace)
```

```
newStr =
'I ascend, they ascended, we are ascending.'
```

Include Dynamic Expression in Replacement Text

Replace lowercase letters at the beginning of sentences with their uppercase equivalents using the `upper` function.

```
str = 'here are two sentences. neither is capitalized.';
expression = '(^|\.)\s*.';
replace = '${upper($0)}';

newStr = regexprep(str,expression,replace)
```

```
newStr =
'Here are two sentences. Neither is capitalized.'
```

The regular expression matches single characters (`.`) that follow the beginning of the character vector (`^`) or a period (`\.`) and any whitespace (`\s*`). The `replace` expression calls the `upper` function for the currently matching character (`$0`).

Update Multiple Pieces of Text

Replace each occurrence of a double letter in a set of character vectors with the symbols `'--'`.

```
str = {                                   ...
'Whose woods these are I think I know.' ; ...
'His house is in the village though;'   ; ...
'He will not see me stopping here'      ; ...
'To watch his woods fill up with snow.'};

expression = '(.)\1';
replace = '--';
newStr = regexprep(str,expression,replace)
```

```
newStr = 4×1 cell array
    'Whose w--ds these are I think I know.'
    'His house is in the vi--age though;'
    'He wi-- not s-- me sto--ing here'
    'To watch his w--ds fi-- up with snow.'
```

Preserve Case in Original Text

Ignore letter case in the regular expression when finding matches, but mimic the letter case of the original text when updating.

```
str = 'My flowers may bloom in May';
expression = 'M(\w+)y';
replace = 'April';

newStr = regexprep(str,expression,replace,'preservecase')
```

```
newStr =
'My flowers april bloom in April'
```

Replace Zero-Length Matches

Insert text at the beginning of a character vector using the `'^'` operator, which returns a zero-length match, and the `'emptymatch'` keyword.

```
str = 'abc';
expression = '^';
replace = '__';
```

```
newStr = regexprep(str,expression,replace,'emptymatch')
```

```
newStr =
'__abc'
```

Input Arguments

str — Text to update

character vector | cell array of character vectors | string array

Text to update, specified as a character vector, a cell array of character vectors, or a string array.

Data Types: `char` | `cell` | `string`

expression — Regular expression

character vector | cell array of character vectors | string array

Regular expression, specified as a character vector, a cell array of character vectors, or a string array. Each expression can contain characters, metacharacters, operators, tokens, and flags that specify patterns to match in `str`.

The following tables describe the elements of regular expressions.

Metacharacters

Metacharacters represent letters, letter ranges, digits, and space characters. Use them to construct a generalized pattern of characters.

Metacharacter	Description	Example
`.`	Any single character, including white space	`'..ain'` matches sequences of five consecutive characters that end with `'ain'`.
`[`$c_1c_2c_3$`]`	Any character contained within the brackets. The following characters are treated literally: `$ | . * + ?` and `-` when not used to indicate a range.	`'[rp.]ain'` matches `'rain'` or `'pain'` or ‘`.ain`’.
`[^`$c_1c_2c_3$`]`	Any character not contained within the brackets. The following	`'[^*rp]ain'` matches all four-letter sequences that end in `'ain'`, except

Metacharacter	Description	Example
	characters are treated literally: `$` `|` `.` `*` `+` `?` and `-` when not used to indicate a range.	`'rain'` and `'pain'` and `'*ain'`. For example, it matches `'gain'`, `'lain'`, or `'vain'`.
`[c1-c2]`	Any character in the range of c_1 through c_2	`'[A-G]'` matches a single character in the range of `A` through `G`.
`\w`	Any alphabetic, numeric, or underscore character. For English character sets, `\w` is equivalent to `[a-zA-Z_0-9]`	`'\w*'` identifies a word.
`\W`	Any character that is not alphabetic, numeric, or underscore. For English character sets, `\W` is equivalent to `[^a-zA-Z_0-9]`	`'\W*'` identifies a term that is not a word.
`\s`	Any white-space character; equivalent to `[ \f\n\r\t\v]`	`'\w*n\s'` matches words that end with the letter `n`, followed by a white-space character.
`\S`	Any non-white-space character; equivalent to `[^ \f\n\r\t\v]`	`'\d\S'` matches a numeric digit followed by any non-white-space character.
`\d`	Any numeric digit; equivalent to `[0-9]`	`'\d*'` matches any number of consecutive digits.
`\D`	Any nondigit character; equivalent to `[^0-9]`	`'\w*\D\>'` matches words that do not end with a numeric digit.
`\oN` or `\o{N}`	Character of octal value `N`	`'\o{40}'` matches the space character, defined by octal `40`.
`\xN` or `\x{N}`	Character of hexadecimal value `N`	`'\x2C'` matches the comma character, defined by hex `2C`.

Character Representation

Operator	Description
`\a`	Alarm (beep)
`\b`	Backspace
`\f`	Form feed

Operator	Description
`\n`	New line
`\r`	Carriage return
`\t`	Horizontal tab
`\v`	Vertical tab
`\char`	Any character with special meaning in regular expressions that you want to match literally (for example, use `\\` to match a single backslash)

Quantifiers

Quantifiers specify the number of times a pattern must occur in the matching text.

Quantifier	Matches the expression when it occurs...	Example
`expr*`	0 or more times consecutively.	`'\w*'` matches a word of any length.
`expr?`	0 times or 1 time.	`'\w*(\.m)?'` matches words that optionally end with the extension `.m`.
`expr+`	1 or more times consecutively.	`'<img src="\w+\.gif">'` matches an `<img>` HTML tag when the file name contains one or more characters.
`expr{m,n}`	At least `m` times, but no more than `n` times consecutively. `{0,1}` is equivalent to `?`.	`'\S{4,8}'` matches between four and eight non-white-space characters.
`expr{m,}`	At least `m` times consecutively. `{0,}` and `{1,}` are equivalent to `*` and `+`, respectively.	`'<a href="\w{1,}\.html">'` matches an `<a>` HTML tag when the file name contains one or more characters.
`expr{n}`	Exactly `n` times consecutively. Equivalent to `{n,n}`.	`'\d{4}'` matches four consecutive digits.

Quantifiers can appear in three modes, described in the following table. *q* represents any of the quantifiers in the previous table.

Mode	Description	Example
`expr`*q*	Greedy expression: match as many characters as possible.	Given the text `'<tr><td><p>text</p></td>'`, the

Mode	Description	Example
		expression `'</?t.*>'` matches all characters between `<tr` and `/td>`: `'<tr><td><p>text</p></td>'`
`expr`*q*`?`	Lazy expression: match as few characters as necessary.	Given the text`'<tr><td><p>text</p></td>'`, the expression `'</?t.*?>'` ends each match at the first occurrence of the closing bracket (`>`): `'<tr>'  '<td>'  '</td>'`
`expr`*q*`+`	Possessive expression: match as much as possible, but do not rescan any portions of the text.	Given the text`'<tr><td><p>text</p></td>'`, the expression `'</?t.*+>'` does not return any matches, because the closing bracket is captured using `.*`, and is not rescanned.

Grouping Operators

Grouping operators allow you to capture tokens, apply one operator to multiple elements, or disable backtracking in a specific group.

Grouping Operator	Description	Example
`(expr)`	Group elements of the expression and capture tokens.	`'Joh?n\s(\w*)'` captures a token that contains the last name of any person with the first name `John` or `Jon`.
`(?:expr)`	Group, but do not capture tokens.	`'(?:[aeiou][^aeiou]){2}'` matches two consecutive patterns of a vowel followed by a nonvowel, such as `'anon'`. Without grouping, `'[aeiou][^aeiou]{2}'` matches a vowel followed by two nonvowels.
`(?>expr)`	Group atomically. Do not backtrack within the group to complete the match, and do not capture tokens.	`'A(?>.*)Z'` does not match `'AtoZ'`, although `'A(?:.*)Z'` does. Using the

Grouping Operator	Description	Example
		atomic group, `Z` is captured using `.*` and is not rescanned.
`(expr1|expr2)`	Match expression `expr1` or expression `expr2`. If there is a match with `expr1`, then `expr2` is ignored. You can include `?:` or `?>` after the opening parenthesis to suppress tokens or group atomically.	`'(let|tel)\w+'` matches words that start with `let` or `tel`.

Anchors

Anchors in the expression match the beginning or end of the input text or word.

Anchor	Matches the...	Example
`^expr`	Beginning of the input text.	`'^M\w*'` matches a word starting with `M` at the beginning of the text.
`expr$`	End of the input text.	`'\w*m$'` matches words ending with `m` at the end of the text.
`\<expr`	Beginning of a word.	`'\<n\w*'` matches any words starting with `n`.
`expr\>`	End of a word.	`'\w*e\>'` matches any words ending with `e`.

Lookaround Assertions

Lookaround assertions look for patterns that immediately precede or follow the intended match, but are not part of the match.

The pointer remains at the current location, and characters that correspond to the `test` expression are not captured or discarded. Therefore, lookahead assertions can match overlapping character groups.

Lookaround Assertion	Description	Example
`expr(?=test)`	Look ahead for characters that match `test`.	`'\w*(?=ing)'` matches terms that are followed by `ing`, such as `'Fly'` and `'fall'` in the input text `'Flying, not falling.'`
`expr(?!test)`	Look ahead for characters that do not match `test`.	`'i(?!ng)'` matches instances of the letter `i` that are not followed by `ng`.
`(?<=test)expr`	Look behind for characters that match `test`.	`'(?<=re)\w*'` matches terms that follow `'re'`, such as `'new'`, `'use'`, and `'cycle'` in the input text `'renew, reuse, recycle'`
`(?<!test)expr`	Look behind for characters that do not match `test`.	`'(?<!\d)(\d)(?!\d)'` matches single-digit numbers (digits that do not precede or follow other digits).

If you specify a lookahead assertion *before* an expression, the operation is equivalent to a logical `AND`.

Operation	Description	Example
`(?=test)expr`	Match both `test` and `expr`.	`'(?=[a-z])[^aeiou]'` matches consonants.
`(?!test)expr`	Match `expr` and do not match `test`.	`'(?![aeiou])[a-z]'` matches consonants.

Logical and Conditional Operators

Logical and conditional operators allow you to test the state of a given condition, and then use the outcome to determine which pattern, if any, to match next. These operators support logical `OR`, and `if` or `if/else` conditions.

Conditions can be tokens, lookaround operators, or dynamic expressions of the form `(?@cmd)`. Dynamic expressions must return a logical or numeric value.

Conditional Operator	Description	Example
`expr1|expr2`	Match expression `expr1` or expression `expr2`.	`'(let|tel)\w+'` matches words that start with `let` or `tel`.

Conditional Operator	Description	Example
	If there is a match with `expr1`, then `expr2` is ignored.	
`(?(cond)expr)`	If condition `cond` is `true`, then match `expr`.	`'(?(?@ispc)[A-Z]:\\)'` matches a drive name, such as `C:\`, when run on a Windows system.
`(?(cond)expr1|expr2)`	If condition `cond` is `true`, then match `expr1`. Otherwise, match `expr2`.	`'Mr(s?)\..*?(?(1)her|his)\w*'` matches text that includes `her` when the text begins with `Mrs`, or that includes `his` when the text begins with `Mr`.

Token Operators

Tokens are portions of the matched text that you define by enclosing part of the regular expression in parentheses. You can refer to a token by its sequence in the text (an ordinal token), or assign names to tokens for easier code maintenance and readable output.

Ordinal Token Operator	Description	Example
`(expr)`	Capture in a token the characters that match the enclosed expression.	`'Joh?n\s(\w*)'` captures a token that contains the last name of any person with the first name `John` or `Jon`.
`\N`	Match the `N`th token.	`'<(\w+).*>.*</\1>'` captures tokens for HTML tags, such as `'title'` from the text `'<title>Some text</title>'`.
`(?(N)expr1|expr2)`	If the `N`th token is found, then match `expr1`. Otherwise, match `expr2`.	`'Mr(s?)\..*?(?(1)her|his)\w*'` matches text that includes `her` when the text begins with `Mrs`, or that includes `his` when the text begins with `Mr`.

Named Token Operator	Description	Example
`(?<name>expr)`	Capture in a named token the characters that match the enclosed expression.	`'(?<month>\d+)-(?<day>\d+)-(?<yr>\d+)'` creates named tokens

Named Token Operator	Description	Example
		for the month, day, and year in an input date of the form `mm-dd-yy`.
`\k<name>`	Match the token referred to by `name`.	`'<(?<tag>\w+).*>.*</\k<tag>>'` captures tokens for HTML tags, such as `'title'` from the text `'<title>Some text</title>'`.
`(?(name)expr1|expr2)`	If the named token is found, then match `expr1`. Otherwise, match `expr2`.	`'Mr(?<sex>s?)\..*?(?(sex)her|his) \w*'` matches text that includes `her` when the text begins with `Mrs`, or that includes `his` when the text begins with `Mr`.

Note: If an expression has nested parentheses, MATLAB captures tokens that correspond to the outermost set of parentheses. For example, given the search pattern `'(and(y|rew))'`, MATLAB creates a token for `'andrew'` but not for `'y'` or `'rew'`.

Dynamic Regular Expressions

Dynamic expressions allow you to execute a MATLAB command or a regular expression to determine the text to match.

The parentheses that enclose dynamic expressions do *not* create a capturing group.

Operator	Description	Example
`(??expr)`	Parse `expr` and include the resulting term in the match expression. When parsed, `expr` must correspond to a complete, valid regular expression. Dynamic expressions that use the backslash escape character (\) require two backslashes: one for the initial parsing of `expr`, and one for the complete match.	`'^(\d+)((??\\w{$1}))'` determines how many characters to match by reading a digit at the beginning of the match. The dynamic expression is enclosed in a second set of parentheses so that the resulting match is captured in a token. For instance, matching `'5XXXXX'` captures tokens for `'5'` and `'XXXXX'`.

Operator	Description	Example
`(??@cmd)`	Execute the MATLAB command represented by `cmd`, and include the output returned by the command in the match expression.	`'(.{2,}).?(??@fliplr($1))'` finds palindromes that are at least four characters long, such as `'abba'`.
`(?@cmd)`	Execute the MATLAB command represented by `cmd`, but discard any output the command returns. (Helpful for diagnosing regular expressions.)	`'\w*?(\w)(?@disp($1))\1\w*'` matches words that include double letters (such as `pp`), and displays intermediate results.

Within dynamic expressions, use the following operators to define replacement text.

Replacement Operator	Description
`$&` or `$0`	Portion of the input text that is currently a match
`$` `	Portion of the input text that precedes the current match
`$'`	Portion of the input text that follows the current match (use `$''` to represent `$'`)
`$N`	`N`th token
`$<name>`	Named token
`${cmd}`	Output returned when MATLAB executes the command, `cmd`

Comments

Characters	Description	Example
`(?#comment)`	Insert a comment in the regular expression. The comment text is ignored when matching the input.	`'(?# Initial digit)\<\d\w+'` includes a comment, and matches words that begin with a number.

Search Flags

Search flags modify the behavior for matching expressions. An alternative to using a search flag within an expression is to pass an `option` input argument.

Flag	Description
`(?-i)`	Match letter case (default for `regexp` and `regexprep`).
`(?i)`	Do not match letter case (default for `regexpi`).

Flag	Description
`(?s)`	Match dot (`.`) in the pattern with any character (default).
`(?-s)`	Match dot in the pattern with any character that is not a newline character.
`(?-m)`	Match the `^` and `$` metacharacters at the beginning and end of text (default).
`(?m)`	Match the `^` and `$` metacharacters at the beginning and end of a line.
`(?-x)`	Include space characters and comments when matching (default).
`(?x)`	Ignore space characters and comments when matching. Use `'\ '` and `'\#'` to match space and # characters.

The expression that the flag modifies can appear either after the parentheses, such as

```
(?i)\w*
```

or inside the parentheses and separated from the flag with a colon (`:`), such as

```
(?i:\w*)
```

The latter syntax allows you to change the behavior for part of a larger expression.

Data Types: `char` | `cell` | `string`

`replace` — Replacement text

character vector | cell array of character vectors | string array

Replacement text, specified as a character vector, a cell array of character vectors, or a string array, as follows:

- If `replace` is a single character vector and `expression` is a cell array of character vectors, then `regexprep` uses the same replacement text for each expression.
- If `replace` is a cell array of `N` character vectors and `expression` is a single character vector, then `regexprep` attempts `N` matches and replacements.
- If both `replace` and `expression` are cell arrays of character vectors, then they must contain the same number of elements. `regexprep` pairs each `replace` element with its matching element in `expression`.

The replacement text can include regular characters, special characters (such as tabs or new lines), or replacement operators, as shown in the following tables.

Replacement Operator	Description
`$&` or `$0`	Portion of the input text that is currently a match
`$` `	Portion of the input text that precedes the current match
`$'`	Portion of the input text that follows the current match (use `$''` to represent `$'`)
`$N`	`N`th token
`$<name>`	Named token
`${cmd}`	Output returned when MATLAB executes the command, `cmd`

Operator	Description
`\a`	Alarm (beep)
`\b`	Backspace
`\f`	Form feed
`\n`	New line
`\r`	Carriage return
`\t`	Horizontal tab
`\v`	Vertical tab
`\char`	Any character with special meaning in regular expressions that you want to match literally (for example, use `\\` to match a single backslash)

Data Types: `char` | `cell` | `string`

`option` — Search or replacement option
`'once'` | `N` | `'warnings'` | `'ignorecase'` | `'preservecase'` | `'emptymatch'` | `'dotexceptnewline'` | `'lineanchors'` | ...

Search or replacement option, specified as a character vector or an integer value, as shown in the following table.

Options come in sets: one option that corresponds to the default behavior, and one or two options that allow you to override the default. Specify only one option from a set. Options can appear in any order.

Default	Override	Description
'all'	'once'	Match and replace the expression as many times as possible (default), or only once.
	N	Replace only the Nth occurrence of the match, where N is an integer value.
'nowarnings'	'warnings'	Suppress warnings (default), or display them.
'matchcase'	'ignorecase'	Match letter case (default), or ignore case while matching and replacing.
	'preservecase'	Ignore case while matching, but preserve the case of corresponding characters in the original text while replacing.
'noemptymatch'	'emptymatch'	Ignore zero length matches (default), or include them.
'dotall'	'dotexceptnewline'	Match dot with any character (default), or all except newline (\n).
'stringanchors'	'lineanchors'	Apply ^ and $ metacharacters to the beginning and end of a character vector (default), or to the beginning and end of a line.
'literalspacing'	'freespacing'	Include space characters and comments when matching (default), or ignore them. With freespacing, use '\ ' and '\#' to match space and # characters.

Data Types: char | string

Output Arguments

newStr — Updated text

character vector | cell array of character vectors | string array

Updated text, returned as a character vector, a cell array of character vectors, or a string array. The data type of newStr is the same as the data type of str.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`contains` | `regexp` | `replace` | `strcmp` | `strfind` | `strrep`

Topics

“Lookahead Assertions in Regular Expressions”
“Tokens in Regular Expressions”
“Dynamic Regular Expressions”

Introduced before R2006a

regexptranslate

Translate text into regular expression

Syntax

```
newStr = regexptranslate(op,str)
```

Description

`newStr = regexptranslate(op,str)` translates `str` into a regular expression and returns the result in `newStr`. You can use `newStr` as a regular expression in the `regexp`, `regexpi`, and `regexprep` functions. The input argument `op` specifies the type of translation that `regexptranslate` performs. For example, if you specify `op` as `'escape'`, then `regexptranslate` translates special characters in `str` so that they are literal characters in the output. `newStr` has the same data type as `str`.

Examples

Translate Special Character

Translate a special character in a character vector using the `regexptranslate` function. Then use the result as a regular expression in `regexp`.

Create a character vector that contains the characters `'\n'`.

```
chr = 'The sequence \n generates a new line.'
```

```
chr =
'The sequence \n generates a new line.'
```

Create a regular expression that finds `'\n'` as a sequence of the two consecutive characters `'\'` and `'n'`. Since the `regexp` function interprets `'\n'` as a newline character, use `regexptranslate` to create a regular expression to escape `'\n'`.

```
pattern = regexptranslate('escape','\n')
```

```
pattern =
```

```
'\\n'
```

Find the starting index of `'\n'` in `chr`. To prevent `regexp` from interpreting `'\n'` as a newline, use `pattern` as the regular expression.

```
idx = regexp(chr,pattern)
```

```
idx = 14
```

Call `regexp` without escaping `'\n'`. Since `regexp` interprets `'\n'` as a newline, it does not find the literal characters in `chr`. The `regexp` function returns an empty array when it does not find a match.

```
idx = regexp(chr,'\n')
```

```
idx =

     []
```

Escape Special Characters in Replacement Text

Create a string. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "Put your money in."
```

```
str =
"Put your money in."
```

Specify the text, `'$0.02'`, as the text to replace the word `'money'`. To escape the `'$'` and `'.'` characters, use `regexptranslate`.

```
r = regexptranslate('escape','$0.02')
```

```
r =
'\$0\.02'
```

Replace `'money'` using the `regexprep` function.

```
newStr = regexprep(str,'money',r)
```

```
newStr =
"Put your $0.02 in."
```

Translate Wildcard Characters

Create a string array that contains file names. Then find only the file names that end with `'.mat'`.

```
str = ["test1.mat","myfile.mat","my-matlab-script.m", ...
       "jan30.mat","table3.xls"]
```

```
str = 1×5 string array
    "test1.mat"    "myfile.mat"    "my-matlab-script.m"    "jan30.mat"    "table3.xls"
```

To match strings with a regular expression, specify `'*.mat'` as the regular expression. Then translate the wildcard character, `'*'`, using the `regexptranslate` function.

```
pattern = regexptranslate('wildcard','*.mat')
```

```
pattern =
'.*\.mat'
```

Find matching elements in `str` using the regular expression specified by `pattern`.

```
matches = regexp(str,pattern)
```

```
matches = 1×5 cell array
    [1]    [1]    []    [1]    []
```

Create a logical array, `TF`, that contains `1` where corresponding elements of `str` matched `pattern`. Then index into `str` using `TF` to display the file names that end with `'.mat'`.

```
tf = ~cellfun('isempty',matches);
newStr = str(tf)
```

```
newStr = 1×3 string array
    "test1.mat"    "myfile.mat"    "jan30.mat"
```

Replace Text with Regular Expression

Create a character vector that contains words separated by whitespace characters, such as spaces and newline characters.

```
chr = 'Whose woods these are I think I know.';
```

```
chr = [chr newline 'His house is in the village though']
```

```
chr =
    'Whose woods these are I think I know.
     His house is in the village though'
```

Specify `'\s'` as a regular expression that matches whitespace characters. Then replace those characters in `chr`.

```
expression = '\s';
newChr = regexptranslate('flexible',chr,expression)
```

```
newChr =
'Whose\swoods\sthese\sare\sI\sthink\sI\sknow.\sHis\shouse\sis\sin\sthe\svillage\sthough
```

Input Arguments

op — Translation type

`'escape'` | `'wildcard'` | `'flexible'`

Type of translation, specified as a character vector or string scalar. You can translate special characters or wildcard characters, or replace text with a matching regular expression, using the options in the table.

Type of Translation	Description
`'escape'`	Translate all special characters in `str`, such as `'$'`, `'.'`, `'?'`,`'['`, so that they are treated as literal characters when used in `regexp`, `regexpi`, and `regexprep`. The translation inserts a backslash, or escape, character, `'\'`, before each special character in `str`.
`'wildcard'`	Translate all wildcard and `'.'` characters in `str` so that they are treated as literal wildcard characters and periods when used in `regexp`, `regexpi`, and `regexprep`. The translation replaces all instances of `'*'` with `'.*'`, all instances of `'?'` with `'.'`, and all instances of `'.'` with `'\.'`.

Type of Translation	Description
`'flexible'`	Replace text in `str` with a regular expression that matches the text. If you specify `'flexible'`, then also specify a regular expression to use as a replacement: `newStr = regexptranslate('flexible',str,expression)`. The `expression` input can be a character vector or string scalar. This syntax is equivalent to `newStr = regexprep(str,expression,regexptranslate('e`

`str` — Input text

character vector | cell array of character vectors | string array

Input text, specified as a character vector, a cell array of character vectors, or a string array.

See Also

See Also

`contains` | `regexp` | `regexpi` | `regexprep` | `replace` | `strfind` | `strjoin` | `strrep` | `strsplit`

Topics

"Regular Expressions"

Introduced before R2006a

registerevent

Associate event handler for COM object event at run time

Syntax

```
registerevent(h,eventhandler)
```

Description

`registerevent(h,eventhandler)` registers event handler routines with their corresponding events. The `eventhandler` argument can be either a character vector that specifies the name of the event handler function, or a function handle that maps to that function. Character vectors used in the `eventhandler` argument are not case-sensitive.

COM functions are available on Microsoft Windows systems only.

Examples

Show events in the MATLAB sample control:

```
f = figure('position',[100 200 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],f);
events(h)
```

```
   Click = void Click()
   DblClick = void DblClick()
   MouseDown = void MouseDown(int16 Button, int16 Shift,
     Variant x, Variant y)
   Event_Args = void Event_Args(int16 typeshort,
     int32 typelong, double typedouble, string typestring,
     bool typebool)
```

MATLAB displays all events associated with the instance of the control.

Register all events with the same event handler routine, `sampev`:

```
registerevent(h,'sampev')
eventlisteners(h)
```

```
ans =
    'Click'          'sampev'
    'DblClick'       'sampev'
    'MouseDown'      'sampev'
    'Event_Args'     'sampev'
```

Register individual events:

```
% Unregister existing events
unregisterallevents(h)
% Register specific events
registerevent(h,{'click' 'myclick'; 'dblclick' 'my2click'})
eventlisteners(h)
```

```
ans =
    'click'        'myclick'
    'dblclick'     'my2click'
```

Register events using a function handle (`@sampev`) instead of the function name:

```
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200]);
registerevent(h,@sampev)
```

See Also

`events (COM)` | `eventlisteners` | `unregisterevent` | `unregisterallevents` | `isevent`

Topics

"COM Event Handlers"

Introduced before R2006a

regmatlabserver

Register current MATLAB as Automation server

Syntax

```
regmatlabserver
[status,message] = regmatlabserver
```

Description

`regmatlabserver` registers the current MATLAB executable as an Automation server.

`[status,message] = regmatlabserver` returns the status and error message, if any, reported by the operating system.

Examples

Register MATLAB as Automation Server

Start MATLAB with the **Run as administrator** option.

At the MATLAB prompt, type:

```
[s,msg] = regmatlabserver
```

```
s =

     0


msg =

     ''
```

MATLAB successfully registered.

Output Arguments

`status` — MATLAB registration status
`0` | nonzero

MATLAB registration status returned as `0` or nonzero. If the attempt to register MATLAB is successful, `status` is `0`. Otherwise, `status` is nonzero.

`message` — System error message
character vector

System error message returned as a character vector if registration is unsuccessful.

See Also

Topics
"Register MATLAB as Automation Server"

Introduced before R2006a

rehash

Refresh function and file system path caches

Syntax

```
rehash
rehash path
rehash toolbox
rehash pathreset
rehash toolboxreset
rehash toolboxcache
```

Description

`rehash` with no arguments updates the MATLAB list of known files and classes for directories on the search path that are not in *`matlabroot`*`/toolbox`. It compares the timestamps for loaded functions against their timestamps on disk. It clears loaded functions if the files on disk are newer. All of this normally happens each time MATLAB displays the Command Window prompt. Use `rehash` with no arguments only when you run a program file that updates another program file, and the calling file needs to reuse the updated version of the second file before the calling file has finished running.

`rehash` **`path`** performs the same updates as `rehash`, but uses a different technique for detecting the files and directories that require updates. Run `rehash path` only if you receive a warning during MATLAB startup notifying you that MATLAB could not tell if a directory has changed, and you encounter problems with MATLAB not using the most current versions of your program files.

`rehash` **`toolbox`** performs the same updates as rehash path, except it updates the list of known files and classes for *all* directories on the search path, including those in *`matlabroot`*`/toolbox`. Run `rehash toolbox` when you change, add, or remove files in *`matlabroot`*`/toolbox` during a session. Typically, you should not make changes to files and directories in *`matlabroot`*`/toolbox`.

`rehash` **`pathreset`** performs the same updates as `rehash` **`path`**, and also ensures the known files and classes list follows precedence rules for shadowed functions.

`rehash` **`toolboxreset`** performs the same updates as `rehash` **`toolbox`**, and also ensures the known files and classes list follows precedence rules for shadowed functions.

`rehash` **`toolboxcache`** performs the same updates as `rehash` **`toolbox`**, and also updates the cache file. This is the equivalent of clicking the **Update Toolbox Path Cache** button in the General Preferences dialog box.

See Also

`addpath` | `path` | `rmpath` | `clear` | `matlabroot`

Topics

"Toolbox Path Caching in MATLAB"
"What Is the MATLAB Search Path?"

Introduced before R2006a

release

Release COM interface

Syntax

```
release(h)
```

Description

`release(h)` releases the interface and all resources used by the interface. Other interfaces on that object might still be active.

You must release the handle when you are done with the interface. A released interface is no longer valid. MATLAB generates an error if you try to use an object that represents that interface.

To release the interface and delete the control itself, use the `delete` function.

COM functions are available on Microsoft Windows systems only.

See Also

`delete (COM)` | `actxcontrol` | `actxserver`

Topics

Releasing Interfaces

Introduced before R2006a

rem

Remainder after division

Syntax

```
r = rem(a,b)
```

Description

`r = rem(a,b)` returns the remainder after division of `a` by `b`, where `a` is the dividend and `b` is the divisor. This function is often called the remainder operation, which can be expressed as `r = a - b.*fix(a./b)`. The `rem` function follows the convention that `rem(a,0)` is `NaN`.

Examples

Remainder After Division of Scalar

Compute the remainder after dividing 5 into 23.

```
a = 23;
b = 5;
r = rem(a,b)
```

```
r = 3
```

Remainder After Division of Vector

Find the remainder after division for a vector of integers and the divisor `3`.

```
a = 1:5;
b = 3;
r = rem(a,b)
```

```
r =
```

```
     1     2     0     1     2
```

Remainder After Division for Positive and Negative Values

Find the remainder after division for a set of integers including both positive and negative values. Note that nonzero results have the same sign as the dividend.

```
a = [-4 -1 7 9];
b = 3;
r = rem(a,b)
```

```
r =

    -1    -1     1     0
```

Remainder After Division for Floating-Point Values

Find the remainder after division for several angles using a divisor of `2*pi`. When possible, `rem` attempts to produce exact integer results by comepensating for floating-point round-off effects.

```
theta = [0.0 3.5 5.9 6.2 9.0 4*pi];
b = 2*pi;
r = rem(theta,b)
```

```
r =

         0    3.5000    5.9000    6.2000    2.7168         0
```

Input Arguments

a — Dividend

scalar | vector | matrix | multidimensional array

Dividend, specified as a scalar, vector, matrix, or multidimensional array. `a` must be a real-valued array of any numerical type. Numeric inputs `a` and `b` must either be the same size or have sizes that are compatible (for example, `a` is an `M`-by-`N` matrix and `b` is a

scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If a and b are duration arrays, then they must be the same size unless one is a scalar. If one input is a duration array, the other input can be a duration array or a numeric array. In this context, rem treats numeric values as a number of standard 24-hour days.

If one input has an integer data type, then the other input must be of the same integer data type or be a scalar double.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | duration | char

b — Divisor
scalar | vector | matrix | multidimensional array

Divisor, specified as a scalar, vector, matrix, or multidimensional array. b must be a real-valued array of any numerical type. Numeric inputs a and b must either be the same size or have sizes that are compatible (for example, a is an M-by-N matrix and b is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If a and b are duration arrays, then they must be the same size unless one is a scalar. If one input is a duration array, the other input can be a duration array or a numeric array. In this context, rem treats numeric values as a number of standard 24-hour days.

If one input has an integer data type, then the other input must be of the same integer data type or be a scalar double.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | duration | char

Definitions

Differences Between mod and rem

The concept of remainder after division is not uniquely defined, and the two functions mod and rem each compute a different variation. The mod function produces a result that is either zero or has the same sign as the divisor. The rem function produces a result that is either zero or has the same sign as the dividend.

Another difference is the convention when the divisor is zero. The `mod` function follows the convention that `mod(a,0)` returns `a`, whereas the `rem` function follows the convention that `rem(a,0)` returns `NaN`.

Both variants have their uses. For example, in signal processing, the `mod` function is useful in the context of periodic signals because its output is periodic (with period equal to the divisor).

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generated code performs the arithmetic using the output class. Results might not match MATLAB due to differences in rounding errors.
- If one of the inputs has type `int64` or `uint64`, then both inputs must have the same type.

See Also

See Also

`mod`

Introduced before R2006a

remove

Class: containers.Map
Package: containers

Remove key-value pairs from `containers.Map` object

Syntax

```
remove(mapObj,keySet)
```

Description

`remove(mapObj,keySet)` erases all specified keys, and the values associated with them, from `mapObj`. Input `keySet` can be a scalar key or a cell array of keys.

Input Arguments

`mapObj`

Object of class containers.Map.

`keySet`

Scalar value, character vector, or cell array that specifies keys in `mapObj` to delete.

Examples

Remove Key-Value Pairs from a Map

Create a map and view the keys and the `Count` property:

```
myKeys = {'a','b','c','d'};
myValues = [1,2,3,4];
mapObj = containers.Map(myKeys,myValues);
```

```
mapKeys = keys(mapObj)
mapCount = mapObj.Count
```

The initial map contains four key-value pairs:

```
mapKeys =

    'a'    'b'    'c'    'd'


mapCount =

                     4
```

Remove the pairs corresponding to keys `b` and `d`:

```
keySet = {'b','d'};
remove(mapObj,keySet);

mapKeys = keys(mapObj)
mapCount = mapObj.Count
```

The modified map contains two key-value pairs:

```
mapKeys =

    'a'    'c'


mapCount =

                     2
```

See Also

keys | values | containers.Map | isKey

removecats

Remove categories from categorical array

Syntax

```
B = removecats(A)
B = removecats(A,oldcats)
```

Description

`B = removecats(A)` removes unused categories from the categorical array, `A`. The output categorical array, `B`, has the same size and values as `A`. However, `B` possibly has fewer categories.

`B = removecats(A,oldcats)` removes the categories specified by `oldcats`. The function `removecats` removes categories, but does not remove any elements of the array. Therefore, elements of `B`, whose values correspond to `oldcats`, are undefined.

Examples

Remove All Unused Categories

Create a categorical array representing political parties of four people.

```
A = categorical({'republican' 'democrat' 'democrat' 'republican'},...
    {'democrat' 'republican' 'independent'})
```

```
A = 1×4 categorical array
     republican      democrat      democrat      republican
```

`A` is a 1-by-4 categorical array.

Summarize the categorical array, `A`.

```
summary(A)
```

```
     democrat      republican      independent
```

```
             2                 2                 0
```

A has three categories. `democrat` appears twice in the array, `republican` appears twice in the array, and `independent` is unused.

Remove the unused category, `independent`.

```
B = removecats(A)
```

```
B = 1×4 categorical array
     republican      democrat      democrat      republican
```

B has the same values as A.

Display the categories of B.

```
categories(B)
```

```
ans = 2×1 cell array
    'democrat'
    'republican'
```

B has fewer categories than A.

Remove Categories and Make Corresponding Values Undefined

Create a categorical array, A, containing modes of transportation.

```
A = categorical({'plane' 'car'; 'train' 'car'; 'plane' 'car'})
```

```
A = 3×2 categorical array
     plane      car
     train      car
     plane      car
```

A is a 3-by-2 categorical array.

Display the categories of A.

```
categories(A)
```

```
ans = 3×1 cell array
```

```
    'car'
    'plane'
    'train'
```

A has three categories, `car`, `plane`, and `train`.

Remove the category, `train`.

```
B = removecats(A,'train')
```

```
B = 3×2 categorical array
     plane            car
     <undefined>      car
     plane            car
```

The element that was from the category `train` is now undefined.

Display the categories of B.

```
categories(B)
```

```
ans = 2×1 cell array
    'car'
    'plane'
```

B has one fewer category than A.

Input Arguments

A — Categorical array

vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

`oldcats` — Categories to remove

character vector | cell array of character vectors

Categories to remove, specified as a character vector or cell array of character vectors. The default is all the unused categories from A.

Tips

- `~ismember(categories(A),unique(A))` returns logical `true` (1) for any unused category of A.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`addcats` | `categories` | `iscategory` | `mergecats` | `renamecats` | `reordercats` | `setcats` | `summary`

Introduced in R2013b

removets

Remove `timeseries` objects from `tscollection` object

Syntax

```
tsc = removets(tsc,Name)
```

Description

`tsc = removets(tsc,Name)` removes one or more `timeseries` objects with the name specified in `Name` from the `tscollection` object tsc. `Name` can either be a string or a cell array of strings.

Examples

The following example shows how to remove a time series from a `tscollection`.

1. Create two timeseries objects, `ts1` and `ts2`.

   ```
   ts1=timeseries([1.1 2.9 3.7 4.0 3.0],1:5,'name','acceleration');
   ts2=timeseries([3.2 4.2 6.2 8.5 1.1],1:5,'name','speed');
   ```

2. Create a `tscollection` object `tsc`, which includes `ts1` and `ts2`.

   ```
   tsc=tscollection({ts1 ts2});
   ```

3. To view the members of `tsc`, type the following at the MATLAB prompt:

   ```
   tsc
   ```

   The response is

   ```
   Time Series Collection Object: unnamed

   Time vector characteristics

         Start time            1 seconds
         End time              5 seconds
   ```

```
Member Time Series Objects:

      acceleration
      speed
```

The members of `tsc` are listed by name at the bottom: `acceleration` and `speed`. These are the `Name` properties of `ts1` and `ts2`, respectively.

4 Remove `ts2` from `tsc`.

```
tsc=removets(tsc,'speed');
```

5 To view the current members of `tsc`, type the following at the MATLAB prompt:

```
tsc
```

The response is

```
Time Series Collection Object: unnamed

Time vector characteristics

      Start time            1 seconds
      End time              5 seconds

Member Time Series Objects:
      acceleration
```

The remaining member of `tsc` is `acceleration`. The `timeseries` `speed` has been removed.

See Also

`addts` | `tscollection`

Introduced before R2006a

renamecats

Rename categories in categorical array

Syntax

```
B = renamecats(A,newnames)
B = renamecats(A,oldnames,newnames)
```

Description

`B = renamecats(A,newnames)` renames all the categories in the categorical array, `A`. Elements of `B` use the new category names.

`B = renamecats(A,oldnames,newnames)` renames only the categories specified by `oldnames`.

Examples

Rename All Categories

Create a categorical array containing states from New England.

```
A = categorical({'MA';'ME';'CT';'VT';'ME';'NH';'VT';'MA';'NH';'CT';'RI'})
```

```
A = 11×1 categorical array
     MA
     ME
     CT
     VT
     ME
     NH
     VT
     MA
     NH
     CT
     RI
```

A is an 11-by-1 categorical array.

Display the categories of A.

```
categories(A)
```

```
ans = 6×1 cell array
    'CT'
    'MA'
    'ME'
    'NH'
    'RI'
    'VT'
```

A has six categories.

Rename the categories to use the full state name instead of the abbreviation.

```
B = renamecats(A,{'Connecticut','Massachusetts',...
    'Maine','New Hampshire','Rhode Island' 'Vermont'})
```

```
B = 11×1 categorical array
     Massachusetts
     Maine
     Connecticut
     Vermont
     Maine
     New Hampshire
     Vermont
     Massachusetts
     New Hampshire
     Connecticut
     Rhode Island
```

Elements of B use the new category names.

Display the categories of B.

```
categories(B)
```

```
ans = 6×1 cell array
    'Connecticut'
    'Massachusetts'
```

```
    'Maine'
    'New Hampshire'
    'Rhode Island'
    'Vermont'
```

Rename One Category

Create a categorical array containing colors.

```
A = categorical({'red' 'blue'; 'purple' 'white'; 'green' 'red'})
```

```
A = 3×2 categorical array
     red         blue
     purple      white
     green       red
```

A is a 3-by-2 categorical array.

Display the categories of A.

```
categories(A)
```

```
ans = 5×1 cell array
    'blue'
    'green'
    'purple'
    'red'
    'white'
```

A has five categories that are listed in alphabetical order.

Change the category name from `purple` to `violet`.

```
B = renamecats(A,'purple','violet')
```

```
B = 3×2 categorical array
     red         blue
     violet      white
     green       red
```

The element `B(2,1)` is `violet` instead of `purple`.

Display the categories of B.

```
categories(B)
```

```
ans = 5×1 cell array
    'blue'
    'green'
    'violet'
    'red'
    'white'
```

`violet` replaces `purple` and the categories are no longer in alphabetical order. Note that the category has not changed its position.

Input Arguments

A — Categorical array

vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

newnames — New category names for B

character vector | cell array of character vectors

New category names for B, specified as a character vector or a cell array of character vectors. The new category names must be unique, and must not duplicate any existing names.

oldnames — Old category names from A

character vector | cell array of character vectors

Old category names from A, specified as a character vector or a cell array of character vectors.

Tips

- Renaming categories does not change their position in `categories(B)`. Use `reordercats` to change the category ordering. For example, you can use `B =`

`reordercats(B,sort(categories(B)))` to put the categories in alphabetical order.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

See Also

See Also

`addcats` | `categories` | `iscategory` | `mergecats` | `removecats` | `reordercats` | `setcats`

Introduced in R2013b

reordercats

Reorder categories in categorical array

Syntax

```
B = reordercats(A)
B = reordercats(A,neworder)
```

Description

`B = reordercats(A)` reorders the categories in the categorical array, `A`, to be in alphanumeric order.

The order of the categories is used by functions such as `summary` and `histogram`. If the categorical array is ordinal, the order of the categories defines their mathematical ordering. The first category specified is the smallest and the last category is the largest.

`B = reordercats(A,neworder)` puts the categories in the order specified by `neworder`.

Examples

Alphabetize Categories of Nonordinal Categorical Array

Create two categorical arrays, `X` and `Y`.

```
X = categorical({'frog';'cat';'cat';'ant';'frog'})
```

```
X = 5×1 categorical array
     frog
     cat
     cat
     ant
     frog
```

```
Y = categorical({'deer';'bear';'eagle';'deer'})
```

```
Y = 4×1 categorical array
     deer
     bear
     eagle
     deer
```

X is a 5-by-1 categorical array. The categories of X are the sorted unique values from the array: `{'ant';'cat';'frog'}`.

Y is a 4-by-1 categorical array. The categories of Y are the sorted unique values from the array: `{'bear';'deer';'eagle'}`.

Concatenate X and Y into a single categorical array, A.

```
A = [X;Y]
```

```
A = 9×1 categorical array
     frog
     cat
     cat
     ant
     frog
     deer
     bear
     eagle
     deer
```

`vertcat` appends the values from Y to the values from X.

List the categories of the categorical array, A.

```
acats = categories(A)
```

```
acats = 6×1 cell array
    'ant'
    'cat'
    'frog'
    'bear'
    'deer'
    'eagle'
```

`vertcat` appends the categories of `Y` to the categories from `X`. The categories of `A` are *not* in alphabetical order.

Reorder the categories of `A` into alphabetical order.

```
B = reordercats(A)
```

```
B = 9×1 categorical array
     frog
     cat
     cat
     ant
     frog
     deer
     bear
     eagle
     deer
```

The output categorical array, `B`, has the same elements in the same order as the input categorical array, `A`.

List the categories of the categorical array, `B`.

```
bcats = categories(B)
```

```
bcats = 6×1 cell array
    'ant'
    'bear'
    'cat'
    'deer'
    'eagle'
    'frog'
```

The categories of `B` are in alphabetical order.

Reorder Categories in Nonordinal Categorical Array

Create a categorical array containing the color of various items.

```
A = categorical({'red';'green';'blue';'red';'green';'red';'blue';'blue'})
```

```
A = 8×1 categorical array
```

```
     red
     green
     blue
     red
     green
     red
     blue
     blue
```

A is an 8-by-1 categorical array.

Display the categories of A.

```
categories(A)
```

```
ans = 3×1 cell array
    'blue'
    'green'
    'red'
```

The categories of A are in alphabetical order and have no mathematical meaning.

Reorder the categories to match the order commonly used for colors.

```
B = reordercats(A,{'red','green','blue'})
```

```
B = 8×1 categorical array
     red
     green
     blue
     red
     green
     red
     blue
     blue
```

B contains the same values as A.

Display the categories of B.

```
categories(B)
```

```
ans = 3×1 cell array
```

```
    'red'
    'green'
    'blue'
```

B is not ordinal and the order of the categories has no mathematical meaning. Although the categories appear in the order of the color spectrum, relational operations, such as greater than and less than, have no meaning.

Reorder Categories in Ordinal Categorical Array

Create an ordinal categorical array, A, containing modes of transportation. Order the categories based on the average price of travel.

```
A = categorical({'plane';'car'; 'train';'car';'plane';'car'},...
    {'car','train','plane'},'Ordinal',true)
```

```
A = 6×1 categorical array
     plane
     car
     train
     car
     plane
     car
```

A is a 6-by-1 ordinal categorical array.

Display the categories of A.

```
categories(A)
```

```
ans = 3×1 cell array
    'car'
    'train'
    'plane'
```

Since A is ordinal, `car < train < plane`.

Reorder the categories to reflect a decrease in the cost of train travel.

```
B = reordercats(A,{'train','car','plane'})
```

```
B = 6×1 categorical array
```

```
     plane
     car
     train
     car
     plane
     car
```

B contains the same values as A.

Display the categories of B.

```
categories(B)
```

```
ans = 3×1 cell array
    'train'
    'car'
    'plane'
```

The mathematical ordering of the categories is now `train < car < plane`. The results from relational operations, `min`, and `max` reflect the new category ordering.

Reorder Categories with Numeric Vector

Create a categorical array, A, containing modes of transportation.

```
A = categorical({'plane';'car';'train';'car';'car';'plane';'car'})
```

```
A = 7×1 categorical array
     plane
     car
     train
     car
     car
     plane
     car
```

Display the categories of A.

```
categories(A)
```

```
ans = 3×1 cell array
```

```
    'car'
    'plane'
    'train'
```

Reorder categories from least to most frequent occurrence in A.

```
B = countcats(A);
[C,neworder] = sort(B);
neworder
```

```
neworder =

     3
     2
     1
```

```
D = reordercats(A,neworder);
categories(D)
```

```
ans = 3×1 cell array
    'train'
    'plane'
    'car'
```

Because `countcats` counts the occurrences of each category, `neworder` describes how to reorder the categories—not the elements—of A.

Input Arguments

A — Categorical array

vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array. If A is an ordinal categorical array, a reordering of the categories changes the mathematical meaning. Consequently, the relational operators, such as greater than and less than, might return different results.

`neworder` — New category order for B

cell array of character vectors | numeric vector

New category order for `B`, specified as a cell array of character vectors or a numeric vector. `neworder` must be a permutation of `categories(A)`.

Tips

- To convert the categorical array, `B`, to an ordinal categorical array, use `B = categorical(B,'Ordinal',true)`. You can specify the order of the categories with `B = categorical(B,valueset,'Ordinal',true)`, where the order of the values in *`valueset`* defines the category order.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`addcats` | `categories` | `iscategory` | `mergecats` | `removecats` | `renamecats` | `setcats`

Introduced in R2013b

rename

Class: FTP

Rename file on FTP server

Syntax

```
rename(ftpobj,oldname,newname)
```

Description

`rename(ftpobj,oldname,newname)` changes the name of the file `oldname` to `newname` in the current folder on an FTP server.

Input Arguments

`ftpobj`

FTP object created by ftp.

`oldname`

Character vector enclosed in single quotation marks that specifies the original name of the file.

`newname`

Character vector enclosed in single quotation marks that specifies a new name for the file.

Examples

Suppose that hypothetical FTP server `ftp.testsite.com` contains a file named `testfile.m`. Rename the file to `final.m`:

```
ts = ftp('ftp.testsite.com');
rename(ts,'testfile.m','final.m');
close(ts);
```

See Also

dir | ftp | mput | delete | mget

Introduced before R2006a

repelem

Repeat copies of array elements

Syntax

```
u = repelem(v,n)
B = repelem(A,r1,...,rN)
```

Description

`u = repelem(v,n)`, where `v` is a scalar or vector, returns a vector of repeated elements of `v`.

- If `n` is a scalar, then each element of `v` is repeated `n` times. The length of `u` is `length(v)*n`.
- If `n` is a vector, then it must be the same length as `v`. Each element of `n` specifies the number of times to repeat the corresponding element of `v`.

This syntax is not supported for `table` input.

`B = repelem(A,r1,...,rN)` returns an array with each element of `A` repeated according to `r1,...,rN`. Each `r1,...,rN` must either be a scalar or a vector with the same length as `A` in the corresponding dimension. For example, if `A` is a matrix, `repelem(A,2,3)` returns a matrix containing a `2`-by-`3` block of each element of `A`.

Examples

Repeat Vector Elements

Create a vector and repeat each of its elements three times into a new vector.

```
v = [1 2 3 4];
u = repelem(v,3)
```

```
u =

     1     1     1     2     2     2     3     3     3     4     4     4
```

Repeat the first two elements of v twice and the last two elements three times.

```
u = repelem(v,[2 2 3 3])
```

```
u =

     1     1     2     2     3     3     3     4     4     4
```

Repeat Matrix Elements

Create a matrix and repeat each element into a 3-by-2 block of a new matrix.

```
A = [1 2; 3 4]
```

```
A =

     1     2
     3     4
```

```
B = repelem(A,3,2)
```

```
B =

     1     1     2     2
     1     1     2     2
     1     1     2     2
     3     3     4     4
     3     3     4     4
     3     3     4     4
```

Repeat Matrix Columns

Create a matrix and copy its columns into a new array, repeating the first column twice and second column three times.

```
A = [1 2; 3 4]
```

```
A =

     1     2
```

```
     3     4
```

```
B = repelem(A,1,[2 3])
```

```
B =

     1     1     2     2     2
     3     3     4     4     4
```

Input Arguments

v — Input element

scalar | vector

Input element, specified as a scalar or a vector.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `table` | `cell` | `datetime` | `duration`
Complex Number Support: Yes

n — Number of times to repeat each element

scalar | vector

Number of times to repeat each element, specified as a scalar or a vector. If `n` is a scalar, then all elements of `v` are repeated `n` times. If `n` is a vector, then each element of `n` specifies the number of times to repeat the corresponding element of `v`. In either case, `n` must be integer-valued.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

A — Input array

matrix | multidimensional array

Input array, specified as a matrix or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `struct` | `table` | `cell` | `datetime` | `duration`

Complex Number Support: Yes

r1, . . . , rN — Repetition factors for each dimension (as separate arguments)
scalars | vectors

Repetition factors for each dimension, specified as separate arguments of integer-valued scalars or vectors. If A is a table, each repetition factor must be a scalar.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

u — Output vector
vector

Output vector. If v is a row vector or scalar, u is a row vector. If v is a column vector, u is also a column vector.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `table` | `cell` | `datetime` | `duration`

B — Output array
matrix | multidimensional array

Output array, returned as a matrix or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `table` | `cell` | `datetime` | `duration`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- The two-input syntax is not supported.
- The replication factor in the first dimension must be 1. For example, `repelem(TA,1,n,p,...)`.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The input must be a vector or matrix. The input cannot be a multidimensional array.

See Also

See Also

`kron` | `repmat`

Introduced in R2015a

replace

Find and replace substrings in string array

Syntax

```
newStr = replace(str,old,new)
```

Description

`newStr = replace(str,old,new)` replaces all occurrences of `old` in string array `str` with `new`. If `old` contains multiple substrings, then `new` either must be the same size as `old`, or must be a single substring.

Examples

Replace Substring in String Array

Replace placeholder text in a list of file names.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["<ROOT_DIR>\MyData\data.tar.gz";
       "<ROOT_DIR>\MyScripts\cleandata.m";
       "<ROOT_DIR>\MyScripts\preprocess.m";
       "<ROOT_DIR>\MyScripts\publishResults.m"]
```

```
str = 4×1 string array
    "<ROOT_DIR>\MyData\data.tar.gz"
    "<ROOT_DIR>\MyScripts\cleandata.m"
    "<ROOT_DIR>\MyScripts\preprocess.m"
    "<ROOT_DIR>\MyScripts\publishResults.m"
```

Replace `<ROOT_DIR>` with a string that is the name of a file path.

```
old = "<ROOT_DIR>";
```

```
new = "C:\MyProject";
newStr = replace(str,old,new)
```

```
newStr = 4×1 string array
    "C:\MyProject\MyData\data.tar.gz"
    "C:\MyProject\MyScripts\cleandata.m"
    "C:\MyProject\MyScripts\preprocess.m"
    "C:\MyProject\MyScripts\publishResults.m"
```

Replace Multiple Substrings

Replace carriage returns with newline characters.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Submission Date: 11/29/15\r";
       "Acceptance Date: 1/20/16\r";
       "Contact: john.smith@example.com\r\n"]
```

```
str = 3×1 string array
    "Submission Date: 11/29/15\r"
    "Acceptance Date: 1/20/16\r"
    "Contact: john.smith@example.com\r\n"
```

Replace the carriage returns.

```
old = {'\r\n','\r'};
new = '\n';
newStr = replace(str,old,new)
```

```
newStr = 3×1 string array
    "Submission Date: 11/29/15\n"
    "Acceptance Date: 1/20/16\n"
    "Contact: john.smith@example.com\n"
```

- “Create String Arrays”
- “Search and Replace Text”
- “Test for Empty Strings and Missing Values”

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`old` — Substring to replace

string array | character vector | cell array of character vectors

Substring to replace, specified as a string array, character vector, or cell array of character vectors.

Data Types: `string` | `char` | `cell`

`new` — New substring

string array | character vector | cell array of character vectors

New substring, specified as a string array, character vector, or cell array of character vectors.

Data Types: `string` | `char` | `cell`

Tips

- To perform multiple replacements for overlapping patterns, use the `strrep` function.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`count` | `erase` | `eraseBetween` | `extractAfter` | `extractBefore` | `extractBetween` | `insertAfter` | `insertBefore` | `join` | `regexp` | `regexprep` | `replaceBetween` | `replaceBetween` | `size` | `split` | `strlength` | `strrep`

Topics

"Create String Arrays"
"Search and Replace Text"
"Test for Empty Strings and Missing Values"

Introduced in R2016b

replaceBetween

Replace substrings identified by indicators that mark their starts and ends

Syntax

```
newStr = replaceBetween(str,startStr,endStr,newText)
newStr = replaceBetween(str,startPos,endPos,newText)
newStr = replaceBetween( ___ ,'Boundaries',bounds)
```

Description

`newStr = replaceBetween(str,startStr,endStr,newText)` replaces substrings in `str` with the text in `newText`. The substrings that are replaced occur between the substrings `startStr` and `endStr`. However, `replaceBetween` does not replace `startStr` and `endStr` themselves. `replaceBetween` returns the result as `newStr`. The `newText` argument can have a different number of characters than the substring it replaces.

If `str` is a string array or a cell array of character vectors, then `replaceBetween` replaces substrings in each element of `str`. The output argument `newStr` has the same data type as `str`.

`newStr = replaceBetween(str,startPos,endPos,newText)` replaces substrings in `str`. The substrings that are replaced occur between the positions `startPos` and `endPos` in `str`, including the characters at those positions.

`newStr = replaceBetween( ___ ,'Boundaries',bounds)` forces the starts and ends specified in any of the previous syntaxes to be either inclusive or exclusive. They are inclusive when `bounds` is `'inclusive'`, and exclusive when `bounds` is `'exclusive'`. For example, `replaceBetween(str,startStr,endStr,newText,'Boundaries','inclusive')` replaces `startStr`, `endStr`, and all the text between them with the text specified by `newText`.

Examples

Replace Text Between Substrings

Create string arrays and replace text that occurs between substrings.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "The quick brown fox"
```

```
str =
"The quick brown fox"
```

Replace the text that occurs between the substrings `quick` and `fox`. The `replaceBetween` function replaces the text but does not replace `quick` or `fox` in the output.

```
newStr = replaceBetween(str,"quick "," fox","red")
```

```
newStr =
"The quick red fox"
```

Replace substrings from each element of a string array. When you specify different substrings as start and end indicators, they must be contained in a string array or a cell array that is the same size as `str`. The replacement text also must be in a string array or a cell array of the same size.

```
str = ["The quick brown fox jumps";"over the lazy dog"]
```

```
str = 2×1 string array
    "The quick brown fox jumps"
    "over the lazy dog"
```

```
newText = ["red";"sleeping"];
newStr = replaceBetween(str,["quick ";"the "],[" fox";" dog"],newText)
```

```
newStr = 2×1 string array
    "The quick red fox jumps"
    "over the sleeping dog"
```

Replace Substrings Between Start and End Positions

Create string arrays and replace substrings between start and end positions that are specified as numbers.

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Create a string that contains a name. To replace the middle name, specify the seventh and 11th positions in the string.

```
str = "Edgar Allen Poe"
```

```
str =
"Edgar Allen Poe"
```

```
newStr = replaceBetween(str,7,11,'A.')
```

```
newStr =
"Edgar A. Poe"
```

Replace substrings from each element of a string array. When you specify different start and end positions with numeric arrays, they must be the same size as the input string array. The replacement text also must be in a string array or a cell array of the same size.

```
str = ["Edgar Allen Poe";"Louisa May Alcott"]
```

```
str = 2×1 string array
    "Edgar Allen Poe"
    "Louisa May Alcott"
```

```
newText = ["A.";"M."];
newStr = replaceBetween(str,[7;8],[11;10],newText)
```

```
newStr = 2×1 string array
    "Edgar A. Poe"
    "Louisa M. Alcott"
```

Replace Text Within Inclusive and Exclusive Boundaries

Replace text from string arrays within boundaries that are forced to be inclusive or exclusive. `replaceBetween` replaces the boundaries along with the text when the

boundaries are inclusive. `replaceBetween` does not replace the boundaries when the boundaries are exclusive.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "small|medium|large"
```

```
str =
"small|medium|large"
```

Replace the text between sixth and 13th positions, but do not replace the characters at those positions.

```
newText = "regular";
newStr = replaceBetween(str,6,13,newText,'Boundaries','exclusive')
```

```
newStr =
"small|regular|large"
```

Replace the text between two substrings, and also the substrings themselves.

```
str = "The quick brown fox jumps over the lazy dog"
```

```
str =
"The quick brown fox jumps over the lazy dog"
```

```
newText = "red bird flies";
newStr = replaceBetween(str,'brown','jumps',newText,'Boundaries','inclusive')
```

```
newStr =
"The quick red bird flies over the lazy dog"
```

Replace Text Between Positions in Character Vector

Create a character vector and replace text between start and end positions.

```
chr = 'mushrooms, peppers, and onions'
```

```
chr =
'mushrooms, peppers, and onions'
```

```
newChr = replaceBetween(chr,12,18,'pineapple')
```

```
newChr =
'mushrooms, pineapple, and onions'
```

Replace text between substrings.

```
newChr = replaceBetween(chr,'mushrooms,',' and',' extra cheese,')
```

```
newChr =
'mushrooms, extra cheese, and onions'
```

- "Create String Arrays"
- "Search and Replace Text"
- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`startStr` — String that indicates start of substring to replace

string array | character vector | cell array of character vectors

String that indicates the start of the substring to replace, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or a cell array of character vectors, then `startStr` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Example: `replaceBetween(str,"AB","YZ",newText)` replaces the substring between `AB` and `YZ` in each element of `str` with the text specified by `newText`.

Example: If `str` is a 2-by-1 string array, then `replaceBetween(str,["AB";"FG"],["YZ";"ST"],newText)` replaces the substrings between `AB` and `YZ` in `str(1)`, and between `FG` and `ST` in `str(2)`.

Data Types: `string` | `char` | `cell`

`endStr` — String that indicates end of substring to replace

string array | character vector | cell array of character vectors

Substring that indicates the end of the text to replace, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or a cell array of character vectors, then `endStr` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Example: `replaceBetween(str,"AB","YZ",newText)` replaces the substring between `AB` and `YZ` in each element of `str` with the text specified by `newText`.

Example: If `str` is a 2-by-1 string array, then `replaceBetween(str,["AB";"FG"],["YZ";"ST"],newText)` replaces the substrings between `AB` and `YZ` in `str(1)`, and between `FG` and `ST` in `str(2)`.

Data Types: `string` | `char` | `cell`

`startPos` — Start position of substring to replace

numeric array

Start position of substring to replace, specified as a numeric array.

If `str` is a string array or a cell array of character vectors, then `startPos` can be a numeric scalar or a numeric array of the same size as `str`.

Example: `replaceBetween(str,5,9,newText)` replaces the substring from the fifth to the ninth positions in each element of `str` with the text specified by `newText`.

Example: If `str` is a 2-by-1 string array, then `replaceBetween(str,[5;10],[9;21],newText)` replaces the substring from the fifth through the ninth positions in `str(1)`, and the 10th through the 21st positions in `str(2)`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`endPos` — End position of substring to replace

numeric array

End position of substring to replace, specified as a numeric array.

If `str` is a string array or a cell array of character vectors, then `endPos` can be a numeric scalar or a numeric array of the same size as `str`.

Example: `replaceBetween(str,5,9,newText)` replaces the substring from the fifth to the ninth positions in each element of `str` with the text specified by `newText`.

Example: If `str` is a 2-by-1 string array, then `replaceBetween(str,[5;10],[9;21],newText)` replaces the substring from the fifth through the ninth positions in `str(1)`, and the 10th through the 21st positions in `str(2)`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`newText` — Replacement text
string array | character vector | cell array of character vectors

Replacement text, specified as a string array, a character vector, or a cell array of character vectors.

If `str` is a string array or a cell array of character vectors, then `newText` can be a character vector, a string scalar, or a string array or a cell array of the same size as `str`.

Example: `replaceBetween(str,"AB","YZ","efg")` replaces the substring between `AB` and `YZ` in each element of `str` with `efg`.

Example: If `str` is a 2-by-1 string array, then `replaceBetween(str,["AB";"FG"],["YZ";"ST"],["efg";"lmnop"])` replaces the substrings between `AB` and `YZ` in `str(1)` with `efg`, and between `FG` and `ST` in `str(2)` with `lmnop`.

Data Types: `string` | `char` | `cell`

Output Arguments

`newStr` — Output text
string array | character vector | cell array of character vectors

Output text, returned as a string array, a character vector, or a cell array of character vectors. `str` and `newStr` have the same data type.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`join` | `replace` | `split`

Topics

“Create String Arrays”
“Search and Replace Text”
“Test for Empty Strings and Missing Values”

Introduced in R2016b

repmat

Repeat copies of array

Syntax

```
B = repmat(A,n)
B = repmat(A,r1,...,rN)
B = repmat(A,r)
```

Description

`B = repmat(A,n)` returns an array containing `n` copies of `A` in the row and column dimensions. The size of `B` is `size(A)*n` when `A` is a matrix.

`B = repmat(A,r1,...,rN)` specifies a list of scalars, `r1,..,rN`, that describes how copies of `A` are arranged in each dimension. When `A` has `N` dimensions, the size of `B` is `size(A).*[r1...rN]`. For example, `repmat([1 2; 3 4],2,3)` returns a 4-by-6 matrix.

`B = repmat(A,r)` specifies the repetition scheme with row vector `r`. For example, `repmat(A,[2 3])` returns the same result as `repmat(A,2,3)`.

Examples

Square Block Format

Repeat copies of a matrix into a 2-by-2 block arrangement.

```
A = diag([100 200 300])
```

```
A =

   100     0     0
     0   200     0
     0     0   300
```

```
B = repmat(A,2)
```

```
B =

   100     0     0   100     0     0
     0   200     0     0   200     0
     0     0   300     0     0   300
   100     0     0   100     0     0
     0   200     0     0   200     0
     0     0   300     0     0   300
```

Rectangular Block Format

Repeat copies of a matrix into a 2-by-3 block arrangement.

```
A = diag([100 200 300])
```

```
A =

   100     0     0
     0   200     0
     0     0   300
```

```
B = repmat(A,2,3)
```

```
B =

   100     0     0   100     0     0   100     0     0
     0   200     0     0   200     0     0   200     0
     0     0   300     0     0   300     0     0   300
   100     0     0   100     0     0   100     0     0
     0   200     0     0   200     0     0   200     0
     0     0   300     0     0   300     0     0   300
```

3-D Block Array

Repeat copies of a matrix into a 2-by-3-by-2 block arrangement.

```
A = [1 2; 3 4]
```

```
A =

     1     2
     3     4
```

```
B = repmat(A,[2 3 2])
```

```
B =

(:,:,1) =

     1     2     1     2     1     2
     3     4     3     4     3     4
     1     2     1     2     1     2
     3     4     3     4     3     4


(:,:,2) =

     1     2     1     2     1     2
     3     4     3     4     3     4
     1     2     1     2     1     2
     3     4     3     4     3     4
```

Vertical Stack of Row Vectors

Vertically stack a row vector four times.

```
A = 1:4;
B = repmat(A,4,1)
```

```
B =

     1     2     3     4
     1     2     3     4
     1     2     3     4
     1     2     3     4
```

Horizontal Stack of Column Vectors

Horizontally stack a column vector four times.

```
A = (1:3)';
B = repmat(A,1,4)
```

```
B =
```

```
     1     1     1     1
     2     2     2     2
     3     3     3     3
```

Tabular Block Format

Create a table with variables `Age` and `Height`.

```
A = table([39; 26],[70; 63],'VariableNames',{'Age' 'Height'})
```

```
A = 2×2 table
    Age    Height
    ___    ______

    39     70
    26     63
```

Repeat copies of the table into a 2-by-3 block format.

```
B = repmat(A,2,3)
```

```
B = 4×6 table
    Age    Height    Age_1    Height_1    Age_2    Height_2
    ___    ______    _____    ________    _____    ________

    39     70        39       70          39       70
    26     63        26       63          26       63
    39     70        39       70          39       70
    26     63        26       63          26       63
```

`repmat` repeats the entries of the table and appends a number to the new variable names.

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `table` | `cell`
Complex Number Support: Yes

`n` — Number of times to repeat input array in row and column dimensions
integer value

Number of times to repeat the input array in the row and column dimensions, specified as an integer value. If `n` is `0` or negative, the result is an empty array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`r1,...,rN` — Repetition factors for each dimension (as separate arguments)
integer values

Repetition factors for each dimension, specified as separate arguments of integer values. If any repetition factor is `0` or negative, the result is an empty array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`r` — Vector of repetition factors for each dimension (as a row vector)
integer values

Vector of repetition factors for each dimension, specified as a row vector of integer values. If any value in `r` is `0` or negative, the result is an empty array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Tips

- To build block arrays by forming the tensor product of the input with an array of ones, use `kron`. For example, to stack the row vector `A = 1:3` four times vertically, you can use `B = kron(A,ones(4,1))`.
- To create block arrays and perform a binary operation in a single pass, use `bsxfun`. In some cases, `bsxfun` provides a simpler and more memory efficient solution. For example, to add the vectors `A = 1:5` and `B = (1:10)'` to produce a 10-by-5 array, use `bsxfun(@plus,A,B)` instead of `repmat(A,10,1) + repmat(B,1,5)`.
- When `A` is a scalar of a certain type, you can use other functions to get the same result as `repmat`.

repmat Syntax	Equivalent Alternative
`repmat(NaN,m,n)`	`NaN(m,n)`
`repmat(single(inf),m,n)`	`inf(m,n,'single')`
`repmat(int8(0),m,n)`	`zeros(m,n,'int8')`
`repmat(uint32(1),m,n)`	`ones(m,n,'uint32')`
`repmat(eps,m,n)`	`eps(ones(m,n))`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- The replication factor in the first dimension must be 1. For example, `repmat(TA,1,n,p,...)`.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Size arguments must have a fixed size.

See Also

See Also

`bsxfun` | `kron` | `meshgrid` | `ndgrid` | `repelem` | `reshape`

Introduced before R2006a

resample (tscollection)

Select or interpolate data in `tscollection` using new time vector

Syntax

```
tsc = resample(tsc,Time)
tsc = resample(tsc,Time,interp_method)
tsc = resample(tsc,Time,interp_method,code)
```

Description

`tsc = resample(tsc,Time)` resamples the `tscollection` object tsc on the new Time vector. When `tsc` uses date strings and Time is numeric, Time is treated as numerical specified relative to the `tsc.TimeInfo.StartDate` property and in the same units that tsc uses. The `resample` method uses the default interpolation method for each time series member.

`tsc = resample(tsc,Time,interp_method)` resamples the `tscollection` object tsc using the interpolation method given by the string interp_method. Valid interpolation methods include `'linear'` and `'zoh'` (zero-order hold).

`tsc = resample(tsc,Time,interp_method,code)` resamples the `tscollection` object tsc using the interpolation method given by the string interp_method. The integer code is a user-defined quality code for resampling, applied to all samples.

Examples

The following example shows how to resample a `tscollection` that consists of two `timeseries` members.

1. Create two `timeseries` objects.

   ```
   ts1=timeseries([1.1 2.9 3.7 4.0 3.0],1:5,'name','acceleration');
   ts2=timeseries([3.2 4.2 6.2 8.5 1.1],1:5,'name','speed');
   ```

2. Create a `tscollection` `tsc`.

   ```
   tsc=tscollection({ts1 ts2});
   ```

The time vector of the collection `tsc` is [1:5], which is the same as for `ts1` and `ts2` (individually).

3 Get the interpolation method for `acceleration` by typing

```
tsc.acceleration
```

MATLAB responds with

```
Time Series Object: acceleration

Time vector characteristics

      Length                5
      Start time            1 seconds
      End time              5 seconds

Data characteristics

      Interpolation method  linear
      Size                  [1  1  5]
      Data type             double
```

4 Set the interpolation method for `speed` to zero-order hold by typing

```
setinterpmethod(tsc.speed,'zoh')
```

MATLAB responds with

```
Time Series Object: acceleration

Time vector characteristics

      Length                5
      Start time            1 seconds
      End time              5 seconds

Data characteristics

      Interpolation method  zoh
      Size                  [1  1  5]
```

```
    Data type              double
```

5 Resample the time-series collection `tsc` by individually resampling each time-series member of the collection and using its interpolation method.

```
res_tsc=resample(tsc,[1 1.5 3.5 4.5 4.9])
```

See Also

getinterpmethod | setinterpmethod | `tscollection`

Introduced before R2006a

reset

Reset graphics object properties to their defaults

Syntax

```
reset(h)
```

Description

`reset(h)` resets all properties on the object identified by `h` to their default values. Properties that do not have default values are not affected.

If `h` is a figure, the MATLAB software does not reset Position, Units, WindowStyle, or PaperUnits. If `h` is an `axes`, MATLAB does not reset Position and Units.

Examples

`reset(gca)` resets the properties of the current axes.

`reset(gcf)` resets the properties of the current figure.

Tutorials

- "Default Property Values"

See Also

`cla` | `clf` | `gca` | `gcf` | `hold`

Topics

"Default Property Values"

Introduced before R2006a

reset (RandStream)

Reset random number stream

Class

`RandStream`

Syntax

```
reset(s)
reset(s,seed)
```

Description

`reset(s)` resets the generator for the random stream, `s`, to the internal state corresponding to its seed. This is similar to clearing `s` and recreating it using `RandStream(Type,...)`, except that `reset` does not set the stream's `NormalTransform`, `Antithetic`, and `FullPrecision` properties to their original values.

`reset(s,seed)` resets the generator for the random stream, `s`, to the internal state corresponding to `seed` (the seed value), and it updates the `seed` property of `s`. The value of `seed` must be an integer between 0 and $2^{32} - 1$. Resetting a stream's seed can invalidate independence with other streams.

Note: Resetting a stream should be used primarily for reproducing results.

Examples

Example 1

Reset a random number stream to its initial state. This does not create a random number stream, it simply resets the stream:

```
stream = RandStream('twister','Seed',0)
```

```
stream =

mt19937ar random stream
             Seed: 0
  NormalTransform: Ziggurat
```

```
reset(stream);
stream.Seed
```

```
ans =

           0
```

Example 2

Reset a random number stream using a specific seed:

```
stream = RandStream('twister','Seed',0)
```

```
stream =

mt19937ar random stream
             Seed: 0
  NormalTransform: Ziggurat
```

```
reset(stream,1);
stream.Seed
```

```
ans =

           1
```

See Also

RandStream | RandStream.getGlobalStream

reshape

Reshape array

Syntax

```
B = reshape(A,sz)
B = reshape(A,sz1,...,szN)
```

Description

`B = reshape(A,sz)` reshapes `A` using the size vector, `sz`, to define `size(B)`. For example, `reshape(A,[2,3])` reshapes `A` into a 2-by-3 matrix. `sz` must contain at least 2 elements, and `prod(sz)` must be the same as `numel(A)`.

`B = reshape(A,sz1,...,szN)` reshapes `A` into a `sz1`-by-`...`-by-`szN` array where `sz1,...,szN` indicates the size of each dimension. You can specify a single dimension size of `[]` to have the dimension size automatically calculated, such that the number of elements in `B` matches the number of elements in `A`. For example, if `A` is a 10-by-10 matrix, then `reshape(A,2,2,[])` reshapes the 100 elements of `A` into a 2-by-2-by-25 array.

Examples

Reshape Vector into Matrix

Reshape a 1-by-10 vector into a 5-by-2 matrix.

```
A = 1:10;
B = reshape(A,[5,2])
```

```
B =

     1     6
     2     7
     3     8
     4     9
```

```
     5    10
```

Reshape Matrix to Have Specified Number of Columns

Reshape a 6-by-6 magic square matrix into a matrix that has only 3 columns. Specify `[]` for the first dimension size to let `reshape` automatically calculate the appropriate number of rows.

```
A = magic(6);
B = reshape(A,[],3)
```

```
B =

    35     6    19
     3     7    23
    31     2    27
     8    33    10
    30    34    14
     4    29    18
     1    26    24
    32    21    25
     9    22    20
    28    17    15
```

The result is a 12-by-3 matrix, which maintains the same number of elements (36) as the original 6-by-6 matrix. The elements in `B` also maintain their columnwise order from `A`.

Reshape Multidimensional Array into Matrix

Reshape a 3-by-2-by-3 array of zeros into a 9-by-2 matrix.

```
A = zeros(3,2,3);
B = reshape(A,9,2)
```

```
B =

     0     0
     0     0
     0     0
     0     0
     0     0
```

```
     0     0
     0     0
     0     0
     0     0
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

sz — Output size

row vector of integers

Output size, specified as a row vector of integers. Each element of `sz` indicates the size of the corresponding dimension in `B`. You must specify `sz` so that the number of elements in `A` and `B` are the same. That is, `prod(sz)` must be the same as `numel(A)`.

Beyond the second dimension, the output, `B`, does not reflect trailing dimensions with a size of `1`. For example, `reshape(A,[3,2,1,1])` produces a 3-by-2 matrix.

Example: `reshape(A,[3,2])`

Example: `reshape(A,[6,4,10])`

Example: `reshape(A,[5,5,5,5])`

sz1,...,szN — Size of each dimension

two or more integers | `[]` (optional)

Size of each dimension, specified as two or more integers with at most one `[]` (optional). You must specify at least 2 dimension sizes, and at most one dimension size can be specified as `[]`, which automatically calculates the size of that dimension to ensure that `numel(B)` matches `numel(A)`. When you use `[]` to automatically calculate a dimension

size, the dimensions that you *do* explicitly specify must divide evenly into the number of elements in the input matrix, `numel(A)`.

Beyond the second dimension, the output, `B`, does not reflect trailing dimensions with a size of `1`. For example, `reshape(A,3,2,1,1)` produces a 3-by-2 matrix.

Example: `reshape(A,3,2)`

Example: `reshape(A,6,[],10)`

Example: `reshape(A,2,5,3,[])`

Example: `reshape(A,5,5,5,5)`

Output Arguments

`B` — Reshaped array
vector | matrix | multidimensional array | cell array

Reshaped array, returned as a vector, matrix, multidimensional array, or cell array. The data type and number of elements in `B` are the same as the data type and number of elements in `A`. The elements in `B` preserve their columnwise ordering from `A`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `datetime` | `duration` | `calendarDuration`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- Reshaping the tall dimension (dimension one) is not supported. The first dimension input should always be empty, such as `reshape(X,[],M,N,...)`.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If the input is a compile-time empty cell array, then the size arguments must be constants.
- Size arguments must have a fixed size.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

See Also

`colon` | `permute` | `repmat` | `shiftdim` | `squeeze`

Introduced before R2006a

residue

Partial fraction expansion (partial fraction decomposition)

Syntax

```
[r,p,k] = residue(b,a)
[b,a] = residue(r,p,k)
```

Description

`[r,p,k] = residue(b,a)` finds the residues, poles, and direct term of a "Partial Fraction Expansion" on page 1-10002 of the ratio of two polynomials, where the expansion is of the form

$$\frac{b(s)}{a(s)} = \frac{b_m s^m + b_{m-1}s^{m-1} + \ldots + b_1 s + b_0}{a_n s^n + a_{n-1}s^{n-1} + \ldots + a_1 s + a_0} = \frac{r_n}{s - p_n} + \ldots + \frac{r_2}{s - p_2} + \frac{r_1}{s - p_1} + k(s).$$

The inputs to `residue` are vectors of coefficients of the polynomials `b = [bm ... b1 b0]` and `a = [an ... a1 a0]`. The outputs are the residues `r = [rn ... r2 r1]`, the poles `p = [pn ... p2 p1]`, and the polynomial `k`. For most textbook problems, `k` is `0` or a constant.

`[b,a] = residue(r,p,k)` converts the partial fraction expansion back to the ratio of two polynomials and returns the coefficients in `b` and `a`.

Examples

Find Partial Fraction Expansion with Real Roots

Find the partial fraction expansion of the following ratio of polynomials $F(s)$ using `residue`

$$F(s) = \frac{b(s)}{a(s)} = \frac{-4s + 8}{s^2 + 6s + 8}.$$

```
b = [-4 8];
a = [1 6 8];
[r,p,k] = residue(b,a)
```

```
r =

   -12
     8


p =

    -4
    -2


k =

     []
```

This represents the partial fraction expansion

$$\frac{-4s+8}{s^2+6s+8} = \frac{-12}{s+4} + \frac{8}{s+2}.$$

Convert the partial fraction expansion back to polynomial coefficients using `residue`.

```
[b,a] = residue(r,p,k)
```

```
b =

    -4     8


a =

     1     6     8
```

This result represents the original fraction $F(s)$.

Expansion with Complex Roots and Equal Degree of Numerator and Denominator

If the degree of the numerator is equal to the degree of the denominator, the output `k` can be nonzero.

Find the partial fraction expansion of a ratio of two polynomials $F(s)$ with complex roots and equal degree of numerator and denominator, where $F(s)$ is

$$F(s) = \frac{b(s)}{a(s)} = \frac{2s^3 + s^2}{s^3 + s + 1}.$$

```
b = [2 1 0 0];
a = [1 0 1 1];
[r,p,k] = residue(b,a)
```

```
r =
   0.5354 + 1.0390i
   0.5354 - 1.0390i
  -0.0708 + 0.0000i


p =
   0.3412 + 1.1615i
   0.3412 - 1.1615i
  -0.6823 + 0.0000i


k = 2
```

`residue` returns the complex roots and poles, and a constant term in `k`, representing the partial fraction expansion

$$F(s) = \frac{b(s)}{a(s)} = \frac{2s^3 + s^2}{s^3 + s^2 + 1} = \frac{0.5354 + 1.0390i}{s - (0.3412 + 1.1615i)} + \frac{0.5354 - 1.0390i}{s - (0.3412 - 1.1615i)} + \frac{-0.0708}{s + 0.6823} + 2.$$

Expansion with Numerator Degree Greater Than Denominator Degree

When the degree of the numerator is greater than the degree of the denominator, the output `k` is a vector that represents the coefficients of a polynomial in s.

Perfom the following partial fraction expansion of $F(s)$ using `residue`.

$$F(s) = \frac{b(s)}{a(s)} = \frac{2s^4 + s}{s^2 + 1} = \frac{0.5 - 1i}{s - 1i} + \frac{0.5 + 1i}{s + 1i} + 2s^2 - 2.$$

```
b = [2 0 0 1 0];
a = [1 0 1];
[r,p,k] = residue(b,a)

r =
   0.5000 - 1.0000i
   0.5000 + 1.0000i


p =
   0.0000 + 1.0000i
   0.0000 - 1.0000i


k =

     2     0    -2
```

k represents the polynomial $2s^2 - 2$.

Input Arguments

b — Coefficients of numerator polynomial

vector of numbers

Coefficients of the polynomial in the numerator, specified as a vector of numbers representing the coefficients of the polynomial in descending powers of *s*.

Data Types: `single` | `double`
Complex Number Support: Yes

a — Coefficients of denominator polynomial

vector of numbers

Coefficients of the polynomial in the denominator, specified as a vector of numbers representing the coefficients of the polynomial in descending powers of *s*.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

r — Residues of partial fraction expansion
column vector of numbers

Residues of partial fraction expansion, returned as a column vector of numbers.

p — Poles of partial fraction expansion
column vector of numbers

Poles of partial fraction expansion, returned as a column vector of numbers.

k — Direct term
row vector of numbers

Direct term, returned as a row vector of numbers that specify the coefficients of the polynomial in descending powers of *s*.

Definitions

Partial Fraction Expansion

Consider the fraction $F(s)$ of two polynomials b and a of degree n and m, respectively

$$F(s) = \frac{b(s)}{a(s)} = \frac{b_n s^n + \ldots + b_2 s^2 + b_1 s + b_0}{a_m s^m + \ldots + a_2 s^2 + a_1 s + a_0}.$$

The fraction $F(s)$ can be represented as a sum of simple fractions

$$\frac{b(s)}{a(s)} = \frac{r_m}{s - p_m} + \frac{r_{m-1}}{s - p_{m-1}} + \ldots + \frac{r_0}{s - p_0} + k(s)$$

This sum is called the partial fraction expansion of F. The values $r_m,\ldots,r_1$ are the residues, the values $p_m,\ldots,p_1$ are the poles, and $k(s)$ is a polynomial in s. For most textbook problems, $k(s)$ is 0 or a constant.

The number of poles `n` is

```
n = length(a)-1 = length(r) = length(p)
```

The direct term vector is empty if `length(b) < length(a)`; otherwise

```
length(k) = length(b)-length(a)+1
```

If `p(j) = ... = p(j+m-1)` is a pole of multiplicity `m`, then the expansion includes terms of the form

$$\frac{r_j}{s-p_j}+\frac{r_{j+1}}{(s-p_j)^2}+\ldots+\frac{r_{j+m-1}}{(s-p_j)^m}.$$

Algorithms

`residue` first obtains the poles using `roots`. Next, if the fraction is nonproper, the direct term `k` is found using `deconv`, which performs polynomial long division. Finally, `residue` determines the residues by evaluating the polynomial with individual roots removed. For repeated roots, `resi2` computes the residues at the repeated root locations.

Numerically, the partial fraction expansion of a ratio of polynomials represents an ill-posed problem. If the denominator polynomial, $a(s)$, is near a polynomial with multiple roots, then small changes in the data, including roundoff errors, can result in arbitrarily large changes in the resulting poles and residues. Problem formulations making use of state-space or zero-pole representations are preferable.

References

[1] Oppenheim, A.V. and R.W. Schafer. *Digital Signal Processing*. Prentice-Hall, 1975, p. 56.

See Also

See Also

`deconv` | `poly` | `roots`

Topics

"Create and Evaluate Polynomials"

Introduced before R2006a

restoredefaultpath

Restore search path to its factory-installed state

Syntax

```
restoredefaultpath
```

Description

`restoredefaultpath` restores the MATLAB search path to its factory-installed state. By default, the search path includes the MATLAB *`userpath`* folder, the folders defined as part of the `MATLABPATH` environment variable, and the folders provided with MATLAB and other MathWorks products. For more information, see "What Is the MATLAB Search Path?"

Note: `restoredefaultpath` is intended only for situations where MATLAB is experiencing startup problems due to a corrupt search path. For general search-path clean up, use the `rmpath` function or the Set Path dialog box.

If MATLAB fails to initialize properly on startup, then call both `restoredefaultpath` and `matlabrc`. For more details, see "Path Unsuccessfully Set at Startup".

MATLAB does not support issuing `restoredefaultpath` from a UNC path name. Doing so might result in MATLAB being unable to find files on the search path. If you do use `restoredefaultpath` from a UNC path name, restore the expected behavior by changing the current folder to an absolute path, and then reissuing the `restoredefaultpath` command.

Alternatives

As an alternative to the `restoredefaultpath` function, use the `rmpath` function or use the `pathtool` function to open the Set Path dialog box.

See Also

`rmpath` | `pathtool` | `addpath` | `genpath` | `matlabrc` | `savepath` | `userpath`

Topics

"Path Unsuccessfully Set at Startup"
"What Is the MATLAB Search Path?"

Introduced before R2006a

rethrow

Reissue error

Note: As of version 7.5, MATLAB supports error handling that is based on the `MException` class. Calling `rethrow` with a structure argument, as described on this page, is now replaced by calling rethrow with an `MException` object, as described on the reference page for MException.rethrow. `rethrow` called with a structure input will be removed in a future version.

Syntax

```
rethrow(errorStruct)
```

Description

`rethrow(errorStruct)` reissues the error specified by `errorStruct`. The currently running function terminates and control returns to the keyboard (or to any enclosing `catch` block). The `errorStruct` argument must be a MATLAB structure containing at least the `message` and `identifier` fields:

Fieldname	Description
`message`	Text of the error message
`identifier`	Message identifier of the error message
`stack`	Information about the error from the program stack

See "Message Identifiers" in the MATLAB documentation for more information on the syntax and usage of message identifiers.

Examples

`rethrow` is usually used in conjunction with `try, catch` statements to reissue an error from a `catch` block after performing `catch`-related operations. For example,

```
try
   do_something
catch
   do_cleanup
   rethrow(previous_error)
end
```

Tips

The `errorStruct` input can contain the field `stack`, identical in format to the output of the `dbstack` command. If the `stack` field is present, the stack of the rethrown error will be set to that value. Otherwise, the stack will be set to the line at which the rethrow occurs.

See Also

See Also

MException.rethrow | MException.throwAsCaller | MException.throw | MException | `assert` | `error` | `try, catch`

Introduced before R2006a

retime

Resample or aggregate data in timetable, and resolve duplicate or irregular times

Syntax

```
TT2 = retime(TT1,newTimeStep,method)
TT2 = retime(TT1,newTimes,method)
```

```
TT2 = retime(TT1,newTimeStep)
TT2 = retime(TT1,newTimes)
```

```
TT = retime( ___ ,Name,Value)
```

Description

`TT2 = retime(TT1,newTimeStep,method)` creates a timetable that contains the variables from `TT1` and row times that are regularly spaced by the time step specified by `newTimeStep`. `retime` resamples or aggregates data from the variables of `TT1` using the function specified by `method`. You can use `retime` to:

- Interpolate data values from `TT1` at different times.
- Aggregate data into time bins (for example, to create a timetable containing quarterly means from monthly data).
- Remove rows from `TT1` that have duplicate row times.
- Make an irregular timetable into a regular timetable, since `newTimeStep` specifies regular row times.

For example, when `newTimeStep` is `'daily'`, and `method` is `'mean'`, then `TT2` contains the daily means of the data from `TT1`.

The first row time of `TT2` is on the time step before the earliest row time from `TT1`. The row times in `TT2` cover the range of row times from `TT1`. However, `TT2` might not include any of the actual row times from `TT1`, since `TT1` might not have any row times that fall on any of the regular row times of `TT2`.

To resample or aggregate data from multiple timetables, see `synchronize`.

`TT2 = retime(TT1,newTimes,method)` creates a timetable that contains the variables from `TT1` and adjusts their data to the time vector `newTimes`, using the method specified by `method`. The `newTimes` time vector must be a sorted datetime or duration vector and contain unique values. The times in `newTimes` become the row times of `TT2`.

`TT2 = retime(TT1,newTimeStep)` creates a timetable using the `'fillwithmissing'` method. `TT2` has missing data indicators wherever `TT2` has a row time that does not match any row time in `TT1`.

If `TT1` has rows with duplicate row times and `TT2` has row times that match the duplicates, then `TT2` contains the first row from each group of rows in `TT1` with duplicate row times that match.

`TT2 = retime(TT1,newTimes)` creates a timetable using the `'fillwithmissing'` method. `TT2` contains missing data indicators wherever `newTimes` does not match row times in `TT1`.

If `TT1` has rows with duplicate row times and `newTimes` has times that match the duplicates, then `TT2` contains the first row from each group of rows in `TT1` with duplicate row times that match.

`TT = retime( ___ ,Name,Value)` creates a timetable with additional options specified by one or more `Name,Value` pairs. You can use this syntax with the input arguments of any of the previous syntaxes.

Examples

Interpolate Irregular Timetable Data to Hourly Times

Create timetable data that are approximately hourly, but with some irregularity in the times. Interpolate the data so that the output timetable has regular hourly row times.

```
Time = datetime({'2015-12-18 07:02:12';'2015-12-18 08:00:47';...
                 '2015-12-18 09:01:37';'2015-12-18 10:03:10';...
                 '2015-12-18 10:59:34'});
Temp = [37.3;41.9;45.7;42.3;39.8];
Pressure = [30.1;29.9;30.03;29.9;29.8];
TT = timetable(Time,Temp,Pressure)
```

```
TT = 5×2 timetable
            Time            Temp    Pressure
```

```
    ____________________    ____    ________

    18-Dec-2015 07:02:12    37.3     30.1
    18-Dec-2015 08:00:47    41.9     29.9
    18-Dec-2015 09:01:37    45.7    30.03
    18-Dec-2015 10:03:10    42.3     29.9
    18-Dec-2015 10:59:34    39.8     29.8
```

To resample with cubic spline interpolation, specify `'spline'`.

```
TT2 = retime(TT,'hourly','spline')
```

```
TT2 = 5×2 timetable
            Time             Temp     Pressure
    ____________________    ______    ________

    18-Dec-2015 07:00:00    37.228    30.124
    18-Dec-2015 08:00:00    41.824    29.899
    18-Dec-2015 09:00:00    45.694    30.029
    18-Dec-2015 10:00:00    42.552     29.91
    18-Dec-2015 11:00:00    39.808      29.8
```

Aggregate Timetable Data and Calculate Mean Values

Create a timetable with temperature and pulse readings taken every fifteen minutes.

```
Time = [minutes(0):minutes(15):minutes(105)]';
Temp = [98;97.5;97.9;98.1;97.9;98;98.3;97.8];
Pulse = [80;75;73;68;69;65;72;71];
TT = timetable(Time,Temp,Pulse)
```

```
TT = 8×2 timetable
      Time      Temp    Pulse
    _______    ____    _____

      0 min      98    80
     15 min    97.5    75
     30 min    97.9    73
     45 min    98.1    68
     60 min    97.9    69
     75 min      98    65
     90 min    98.3    72
```

```
    105 min    97.8    71
```

Calculate the mean for each reading over hourly time bins. When you aggregate data over time bins, the row times of the output timetable are the left edges of the time bins.

```
TT2 = retime(TT,'hourly','mean')
```

```
TT2 = 2×2 timetable
     Time       Temp     Pulse
    ______    ______    _____

     0 min    97.875       74
    60 min        98    69.25
```

Interpolate Timetable Data to Arbitrary Times

Create a timetable that contains times, temperature, and pressure readings taken approximately at the half-hour mark, but with one measurement from 9:00 AM missing.

```
Time = datetime({'2015-12-18 07:29:53';'2015-12-18 08:00:00';...
                 '2015-12-18 08:31:02';'2015-12-18 09:30:00'});
Temp = [37.3;41.9;45.7;39.8];
Pressure = [30.1;29.9;30.03;29.8];
TT1 = timetable(Time,Temp,Pressure)
```

```
TT1 = 4×2 timetable
            Time             Temp    Pressure
    ____________________     ____    ________

    18-Dec-2015 07:29:53     37.3     30.1
    18-Dec-2015 08:00:00     41.9     29.9
    18-Dec-2015 08:31:02     45.7    30.03
    18-Dec-2015 09:30:00     39.8     29.8
```

Create a regular time vector and interpolate the data based on it. To resample the data from `TT1` using linear interpolation, specify `'linear'`.

```
newTimes = [datetime('2015-12-18 07:30:00'):minutes(30):datetime('2015-12-18 09:30:00')
TT2 = retime(TT1,newTimes,'linear')
```

```
TT2 = 5×2 timetable
```

```
            Time              Temp     Pressure
    ____________________    ______    ________

    18-Dec-2015 07:30:00    37.318    30.099
    18-Dec-2015 08:00:00      41.9      29.9
    18-Dec-2015 08:30:00    45.573    30.026
    18-Dec-2015 09:00:00    42.802    29.917
    18-Dec-2015 09:30:00      39.8      29.8
```

Adjust Timetable by Inserting Missing Data Indicators

Create a timetable that contains times and measurements of wind speed and direction.

```
Time = datetime({'2015-12-18 07:00:00';'2015-12-18 08:03:47';...
                 '2015-12-18 09:00:00';'2015-12-18 10:00:00';...
                 '2015-12-18 10:59:34'});
WindSpeed = [13.4;6.5;7.3;8.5;2.3];
WindDirection = categorical({'NE';'N';'NE';'NW';'W'});
TT1 = timetable(Time,WindSpeed,WindDirection)
```

```
TT1 = 5×2 timetable
            Time              WindSpeed    WindDirection
    ____________________    _________    _____________

    18-Dec-2015 07:00:00    13.4         NE
    18-Dec-2015 08:03:47     6.5         N
    18-Dec-2015 09:00:00     7.3         NE
    18-Dec-2015 10:00:00     8.5         NW
    18-Dec-2015 10:59:34     2.3         W
```

Adjust the data to an hourly time vector. Insert missing data indicators in `TT2` where `TT1` does not have data on the hourly time vector.

```
TT2 = retime(TT1,'hourly')
```

```
TT2 = 5×2 timetable
            Time              WindSpeed    WindDirection
    ____________________    _________    _____________

    18-Dec-2015 07:00:00    13.4         NE
    18-Dec-2015 08:00:00     NaN         <undefined>
    18-Dec-2015 09:00:00     7.3         NE
```

```
    18-Dec-2015 10:00:00     8.5         NW
    18-Dec-2015 11:00:00     NaN         <undefined>
```

Apply Multiple Methods to Timetable

Load a timetable. Adjust the timetable variables using the `retime` function and different methods for different variables.

Load a timetable with temperature, wind speed, and rainfall measurements for Boston.

```
load(fullfile(matlabroot,'examples','matlab','bostonTT'));
Boston
```

```
Boston = 6×3 timetable
            Time            Temp    WindSpeed    Rain
    ____________________    ____    _________    ____

    2016-06-09 06:03:00     59.5    0.1          0.05
    2016-06-09 12:00:23       63    2.3          0.08
    2016-06-09 18:02:57     61.7    3.1          0.13
    2016-06-10 06:01:47     55.4    5.7          0.15
    2016-06-10 12:06:00     62.3    2.6          0.87
    2016-06-10 18:02:57     58.8    6.2          0.33
```

Adjust the data to produce daily mean temperatures and wind speeds, and daily sums of the rainfall. `retime` applies the same method to all timetable variables. To apply different methods, index into the timetable to select variables, and call `retime` for each method you use.

```
BOS = Boston(:,{'Temp','WindSpeed'});
TT1 = retime(BOS,'daily','mean')
```

```
TT1 = 2×2 timetable
            Time             Temp     WindSpeed
    ____________________    ______    _________

    2016-06-09 00:00:00       61.4    1.8333
    2016-06-10 00:00:00     58.833    4.8333
```

```
BOS = Boston(:,'Rain');
TT2 = retime(BOS,'daily','sum')
```

```
TT2 = 2×1 timetable
            Time            Rain
    ____________________    ____

    2016-06-09 00:00:00    0.26
    2016-06-10 00:00:00    1.35
```

To combine all results in one timetable, concatenate `TT1` and `TT2`.

```
TT = [TT1 TT2]
```

```
TT = 2×3 timetable
            Time             Temp     WindSpeed    Rain
    ____________________    ______    _________    ____

    2016-06-09 00:00:00      61.4    1.8333       0.26
    2016-06-10 00:00:00    58.833    4.8333       1.35
```

- "Create Timetables"
- "Clean Timetable with Missing, Duplicate, or Nonuniform Times"
- "Resample and Aggregate Data in Timetable"
- "Combine Timetables and Synchronize Their Data"
- "Select Timetable Data by Row Time and Variable Type"
- "Access Data in a Table"

Input Arguments

`TT1` — Input timetable

timetable

Input timetable.

`newTimeStep` — Time step for spacing times in output timetable

character vector

Time step for spacing times in the output timetable, specified as a character vector. `newTimeStep` can be any of the listed time steps.

Time Step	Description
`'yearly'`	One year
`'quarterly'`	One quarter
`'monthly'`	One month
`'weekly'`	One week
`'daily'`	One day
`'hourly'`	One hour
`'minutely'`	One minute
`'secondly'`	One second

`newTimes` — New time vector

datetime vector | duration vector

New time vector, specified as a datetime vector or a duration vector. The new time vector must be a column vector. `newTimes` can have a different number of rows than `TT1`.

`method` — Method for adjusting timetable data

character vector | function handle

Method for adjusting timetable data, specified as a character vector or a function handle. You can use any of the listed methods listed to adjust the data from `TT1`.

Fill Methods

Copy data from the rows of `TT1` when row times of `TT2` match row times of `TT1`. Then, fill the remaining rows of `TT2` with missing data indicators.

To fill the remaining rows with a constant instead of a missing data indicator, specify `method` as `'fillwithconstant'` and use the `'Constant'` parameter.

Method	Description
`'fillwithmissing'` (default)	Fill gaps with missing data indicators (for example, `NaN` for numeric variables).
`'fillwithconstant'`	Fill gaps with the value of the `'Constant'` parameter. The default value is `0`.

Nearest Neighbor Methods

Copy data from the rows of `TT1` to the rows of `TT2` whose row times are the nearest match, according to the specified method. `TT1` must be sorted by its row times.

Method	Description
`'previous'`	Copy data from the nearest preceding neighbor in the input timetable, proceeding from the end of the vector of row times. If there are duplicate row times, then `'previous'` indicates the last of the duplicates.
`'next'`	Copy data from the nearest following neighbor in the input timetable, proceeding from the beginning of the vector of row times. If there are duplicate row times, then `'next'` indicates the first of the duplicates.
`'nearest'`	Copy data from the nearest neighbor in the input timetable.

Interpolation Methods

Interpolate data values in `TT2` from data values in neighboring rows of `TT1`. The input timetable must have row times that are sorted and unique. To control how the data are extrapolated beyond the first and last row times of `TT1`, use the `'EndValues'` parameter.

Method	Description
`'linear'`	Use linear interpolation.
`'spline'`	Use piecewise cubic spline interpolation.
`'pchip'`	Use shape-preserving piecewise cubic interpolation.

Aggregation Methods

Aggregate data from the rows of `TT1` over time bins specified by the row times of `TT2`. Each row time of `TT2` is the left edge of a time bin, with the next consecutive row time being the right edge. By default, the left edges are included in the time bins. To

control whether the left or the right bin edges are included in the time bins, use the `'IncludedEdge'` parameter.

If you specify the time vector `newTimes`, then `newTimes` must be sorted in ascending order.

All the listed methods omit `NaN`s, `NaT`s, and other missing data indicators, except for `func`. To include missing data indicators, specify `func` as a function handle to a function that includes them when aggregating data.

Method	Description
`'sum'`	Sum the values in each time bin.
`'mean'`	Calculate the mean of the values in each time bin.
`'prod'`	Calculate the product of the values in each time bin.
`'min'`	Calculate the minimum of the values in each time bin.
`'max'`	Calculate the maximum of the values in each time bin.
`'count'`	Count the number of values in each time bin.
`'firstvalue'`	Use the first value in each time bin.
`'lastvalue'`	Use the last value in each time bin.
`@func`	Use the function specified by the function handle (for example, `@std` to calculate the standard deviation for the values in each time bin). `func` must return an output argument that is a scalar or a row vector, and must accept empty inputs.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `TT2 = retime(TT1,newTimes,'Constant',0)` creates the timetable `TT2` and fills its rows with zeroes where `TT2` has row times that are not row times in `TT1`.

`'Constant'` — Constant to fill missing values

numeric scalar

Constant to fill missing values, specified as a numeric scalar.

`'EndValues'` — Method for extrapolation when using interpolation method

`'extrap'` (default) | numeric, datetime, or duration scalar

Method for extrapolation when using interpolation method, specified as the comma-separated pair consisting of `'EndValues'` and either `'extrap'`, or a constant scalar value.

Method	Description
`'extrap'` (default)	Extrapolate using the method specified by the `method` input argument
scalar value	Extrapolate by filling with a constant value (numeric, datetime, or duration value only)

`'IncludedEdge'` — Edges to include in each time bin

`'left'` (default) | `'right'`

Edges to include in each time bin, specified as the comma-separated pair consisting of `'IncludedEdge'` and either `'left'` or `'right'`. Each row time of `TT2` is the left edge of a time bin, with the next consecutive row time being the right edge.

Edges to Include	Description
`'left'` (default)	All bins include the left bin edge, except for the last bin, which includes both edges
`'right'`	All bins include the right bin edge, except for the first bin, which includes both edges

If you specify `'left'`, then the time bins include the left edges except for the last bin, which includes both edges. If you specify `'right'`, then the time bins include the right edges except for the first bin, which includes both edges.

Example: `TT2 = retime(TT1,'hourly','mean','IncludedEdge','right')` includes the right bin edge of each time bin.

See Also

See Also

`horzcat` | `innerjoin` | `lag` | `outerjoin` | `synchronize` | `vertcat`

Topics

"Create Timetables"
"Clean Timetable with Missing, Duplicate, or Nonuniform Times"
"Resample and Aggregate Data in Timetable"
"Combine Timetables and Synchronize Their Data"
"Select Timetable Data by Row Time and Variable Type"
"Access Data in a Table"
"Tables"
"Represent Dates and Times in MATLAB"

Introduced in R2016b

return

Return control to invoking function

Syntax

```
return
```

Description

`return` forces MATLAB to return control to the invoking function before it reaches the end of the function. The invoking function is the function that calls the script or function containing the call to `return`. If you call the function or script that contains `return` directly, there is no invoking function and MATLAB returns control to the command prompt.

Note: Be careful when you use `return` within conditional blocks, such as `if` or `switch`, or within loop control statements, such as `for` or `while`. When MATLAB reaches a `return` statement, it does not just exit the loop; it exits the script or function and returns control to the invoking function or command prompt.

Examples

Return Control to Keyboard

In your current working folder, create a function, `findSqrRootIndex`, to find the index of the first occurrence of the square root of a value within an array. If the square root isn't found, the function returns `NaN`.

```
function idx = findSqrRootIndex(target,arrayToSearch)

idx = NaN;
if target < 0
   return
end
```

```
for idx = 1:length(arrayToSearch)
    if arrayToSearch(idx) == sqrt(target)
        return
    end
end
```

At the command prompt, call the function.

```
A = [3 7 28 14 42 9 0];
b = 81;
findSqrRootIndex(b,A)
```

```
ans =

     6
```

When MATLAB encounters the return statement, it returns control to the keyboard because there is no invoking function.

Return Control to Invoking Function

In a file, `myFunction.m`, in your current working folder, create the following function to find the index of the first occurrence of the square root of a value within an array. This function calls the `findSqrRootIndex` function you created in the previous example.

```
function idx = findSqrRootIndex(target,arrayToSearch)

idx = NaN;
if target < 0
   return
end

for idx = 1:length(arrayToSearch)
    if arrayToSearch(idx) == sqrt(target)
        return
    end
end
```

At the command prompt, call the function.

```
returnControlExample(49)
```

```
Square root found at index 2
```

When MATLAB encounters the `return` statement within `findSqrRootIndex`, it returns control to the invoking function, `myFunction`, and displays the relevant message.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`break` | `continue` | `disp` | `end` | `error` | `for` | `if` | `keyboard` | `switch` | `while`

Introduced before R2006a

reverse

Reverse order of characters in string

Syntax

```
newStr = reverse(str)
```

Description

`newStr = reverse(str)` reverses the order of the characters of each element of `str`.

Examples

Reverse Strings

Reverse the strings in a string array and find strings that read the same when reversed. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["airport","control tower","radar","runway"]
```

```
str = 1×4 string array
    "airport"    "control tower"    "radar"    "runway"
```

```
newStr = reverse(str)
```

```
newStr = 1×4 string array
    "tropria"    "rewot lortnoc"    "radar"    "yawnur"
```

```
tf = (newStr == str)
```

```
tf = 1×4 logical array
   0   0   1   0
```

```
str(tf)
```

```
ans =
"radar"
```

Input Arguments

str — Input text
string array | character vector | cell array of character vectors

Input text, specified as a string array, character vector, or cell array of character vectors.

Output Arguments

newStr — Output text
string array | character vector | cell array of character vectors

Output text, returned as a string array, a character vector, or a cell array of character vectors. `str` and `newStr` are the same data type.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also
`eq` | `flip` | `fliplr` | `lower` | `replace` | `reshape` | `upper`

Introduced in R2016b

rewriteDirectory

Class: Tiff

Write modified metadata to existing IFD

Syntax

```
rewriteDirectory(tiffobj)
```

Description

`rewriteDirectory(tiffobj)` writes modified metadata (tag) data to an existing directory. Use this tag when you want to change the value of a tag in an existing image file directory.

Examples

Modify Value of Tag

Write a sample TIFF file, `mytif.tif`. Create a TIFF object associated with this file.

```
imdata = peaks(256);
imwrite(imdata,'mytif.tif');
t = Tiff('mytif.tif','r+');
```

Modify the value of a tag.

```
setTag(t,'Software','MATLAB')
rewriteDirectory(t)
close(t);
```

References

This method corresponds to the `TIFFRewriteDirectory` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

See Also

Tiff.writeDirectory

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

rgb2gray

Convert RGB image or colormap to grayscale

Syntax

```
I = rgb2gray(RGB)
newmap = rgb2gray(map)
```

Description

`I = rgb2gray(RGB)` converts the truecolor image `RGB` to the grayscale intensity image `I`. The `rgb2gray` function converts RGB images to grayscale by eliminating the hue and saturation information while retaining the luminance. If you have Parallel Computing Toolbox installed, `rgb2gray` can perform this conversion on a GPU.

`newmap = rgb2gray(map)` returns a grayscale colormap equivalent to `map`.

Examples

Convert RGB Image to Grayscale Image

Read and display an RGB image, and then convert it to grayscale.

Read the sample file, `peppers.png`, and display the RGB image.

```
RGB = imread('peppers.png');
imshow(RGB)
```

Convert the RGB image to a grayscale image and display it.

```
I = rgb2gray(RGB);
figure
imshow(I)
```

Convert RGB Colormap to Grayscale Colormap

Read an indexed image with an RGB colormap. Then, convert the colormap to grayscale.

Read the sample file, `corn.tif`, which is an indexed image with an RGB colormap.

```
[X,map] = imread('corn.tif');
```

Display the image.

```
imshow(X,map)
```

Convert the RGB colormap to a grayscale colormap and redisplay the image.

```
newmap = rgb2gray(map);
imshow(X,newmap)
```

Input Arguments

RGB — Truecolor image
3-D numeric array

Truecolor image, specified as 3-D numeric array.

If you have Parallel Computing Toolbox installed, `RGB` can also be a gpuArray.

Data Types: `single` | `double` | `uint8` | `uint16`

`map` — Colormap
m-by-3 numeric array

Colormap, specified as an *m*-by-3 numeric array.

If you have Parallel Computing Toolbox installed, `map` can also be a gpuArray.

Data Types: `double`

Output Arguments

`I` — grayscale image
numeric array

Grayscale image, returned as a numeric array.

If you have Parallel Computing Toolbox installed, then `I` can also be a gpuArray.

`newmap` — grayscale color map
m-by-3 numeric array

Grayscale colormap, returned as an *m*-by-3 numeric array.

If you have Parallel Computing Toolbox installed, then `newmap` can also be a gpuArray.

Tips

- `rgb2gray` supports the generation of C code using MATLAB Coder.

Algorithms

`rgb2gray` converts RGB values to grayscale values by forming a weighted sum of the *R*, *G*, and *B* components:

```
0.2989 * R + 0.5870 * G + 0.1140 * B
```

These are the same weights used by the `rgb2ntsc` function to compute the *Y* component.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`ind2gray` | `mat2gray` | `ntsc2rgb` | `rgb2ind` | `rgb2ntsc`

rgb2hsv

Convert RGB colormap to HSV colormap

Syntax

```
H = rgb2hsv(M)
hsv_image = rgb2hsv(rgb_image)
```

Description

`H = rgb2hsv(M)` converts an RGB colormap `M` to an HSV colormap `H`. Both colormaps are *m*-by-3 matrices. The elements of both colormaps are in the range 0 to 1.

The columns of the input matrix `M` represent intensities of red, green, and blue, respectively. The columns of the output matrix `H` represent hue, saturation, and value, respectively.

`hsv_image = rgb2hsv(rgb_image)` converts the RGB image to the equivalent HSV image. `rgb_image` is an *m*-by-*n*-by-3 image array whose three planes contain the red, green, and blue components for the image. HSV is returned as an *m*-by-*n*-by-3 image array whose three planes contain the hue, saturation, and value components for the image.

Class Support

If the input is an RGB image, it can be of class `uint8`, `uint16`, `single`, or `double`. The output image is `single` when the input is `single`. For all other input data types, the output image is `double`. If the input is a colormap, the input and output colormaps are both of class `double`.

Algorithms

Here are the conversion equations used in `rgb2hsv`:

```
v = max(max(r,g),b);
h = zeros(size(v), 'like', r);
s = (v - min(min(r,g),b));

z = ~s;
s(z) = 1;
k = (r == v);
h(k) = (g(k) - b(k))./s(k);
k = (g == v);
h(k) = 2 + (b(k) - r(k))./s(k);
k = (b == v);
h(k) = 4 + (r(k) - g(k))./s(k);
h = h/6;
k = (h < 0);
h(k) = h(k) + 1;
h(z) = 0;

tmp = s./v;
tmp(z) = 0;
k = (v~=0);
s(k) = tmp(k);
s(~v) = 0;
```

See Also

colormap | hsv2rgb | rgbplot

Introduced before R2006a

rgb2ind

Convert RGB image to indexed image

Syntax

```
[X,map] = rgb2ind(RGB,n)
X = rgb2ind(RGB, map)
[X,map] = rgb2ind(RGB, tol)
[ ___ ] = rgb2ind( ___ ,dither_option)
```

Description

`[X,map] = rgb2ind(RGB,n)` converts the RGB image to an indexed image `X` using minimum variance quantization and dithering. `map` contains at most `n` colors. `n` must be less than or equal to 65,536.

`X = rgb2ind(RGB, map)` converts the RGB image to an indexed image `X` with colormap `map` using the inverse colormap algorithm and dithering. `size(map,1)` must be less than or equal to 65,536.

`[X,map] = rgb2ind(RGB, tol)` converts the RGB image to an indexed image `X` using uniform quantization and dithering. `map` contains at most `(floor(1/tol)+1)^3` colors. `tol` must be between 0.0 and 1.0.

`[ ___ ] = rgb2ind( ___ ,dither_option)` enables or disables dithering. `dither_option` can be one of these values.

`'dither'` (default)	Dithers, if necessary, to achieve better color resolution at the expense of spatial resolution
`'nodither'`	Maps each color in the original image to the closest color in the new map. No dithering is performed.

Note The values in the resultant image `X` are indexes into the colormap `map` and should not be used in mathematical processing, such as filtering operations.

Class Support

The input image can be of class `uint8`, `uint16`, `single`, or `double`. If the length of `map` is less than or equal to 256, the output image is of class `uint8`. Otherwise, the output image is of class `uint16`.

The value `0` in the output array `X` corresponds to the first color in the colormap.

Examples

Convert RGB Image to Indexed Image

Read and display a truecolor `uint8` JPEG image of a nebula.

```
RGB = imread('ngc6543a.jpg');
figure
imagesc(RGB)
axis image
zoom(4)
```

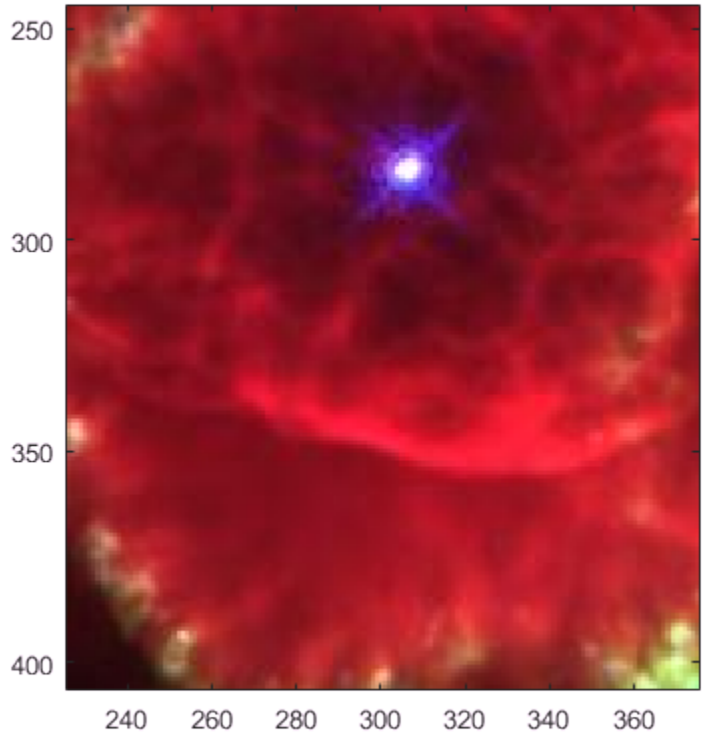

Convert RGB to an indexed image with 32 colors.

```
[IND,map] = rgb2ind(RGB,32);
figure
imagesc(IND)
colormap(map)
axis image
zoom(4)
```

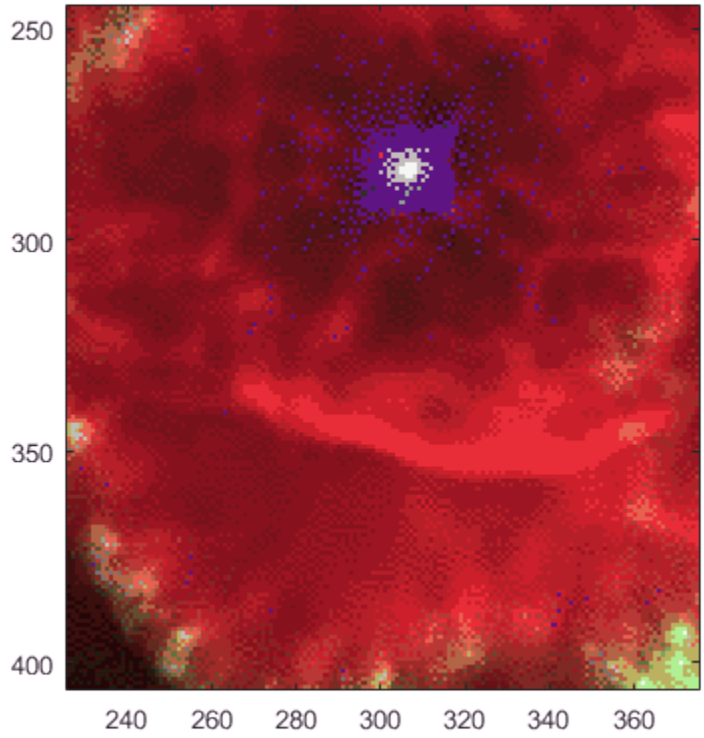

Tips

- If you specify `tol`, `rgb2ind` uses uniform quantization to convert the image. This method involves cutting the RGB color cube into smaller cubes of length `tol`.
- If you specify `n`, `rgb2ind` uses minimum variance quantization. This method involves cutting the RGB color cube into smaller boxes (not necessarily cubes) of different sizes, depending on how the colors are distributed in the image. If the input image actually uses fewer colors than the number you specify, the output colormap is also smaller.

- If you specify `map`, `rgb2ind` uses colormap mapping, which involves finding the colors in `map` that best match the colors in the RGB image.

Algorithms

- Uniform Quantization — Uniform quantization cuts the RGB color cube into smaller cubes of length `tol`. For example, if you specify a `tol` of 0.1, the edges of the cubes are one-tenth the length of the RGB cube. The total number of small cubes is:

  ```
  n = (floor(1/tol)+1)^3
  ```

  Each cube represents a single color in the output image. Therefore, the maximum length of the colormap is `n`. `rgb2ind` removes any colors that don't appear in the input image, so the actual colormap can be much smaller than `n`.
- Minimum Variance Quantization — Minimum variance quantization cuts the RGB color cube into smaller boxes (not necessarily cubes) of different sizes, depending on how the colors are distributed in the image. If the input image actually uses fewer colors than the number specified, the output colormap is also smaller.
- Inverse Colormap — The inverse colormap algorithm quantizes the specified colormap into 32 distinct levels per color component. Then, for each pixel in the input image, the closest color in the quantized colormap is found.

References

[1] Spencer W. Thomas, "Efficient Inverse Color Map Computation", *Graphics Gems II*, (ed. James Arvo), Academic Press: Boston. 1991. (includes source code)

See Also

`cmunique` | `dither` | `imapprox` | `ind2rgb`

rgbplot

Plot colormap



Syntax

```
rgbplot(cmap)
```

Description

`rgbplot(cmap)` plots the three columns of `cmap`, where `cmap` is an *m*-by-3 colormap matrix. `rgbplot` draws the first column in red, the second in green, and the third in blue.

Examples

Copper Colormap

Plot the RGB values of the `copper` colormap.

```
rgbplot(copper)
```

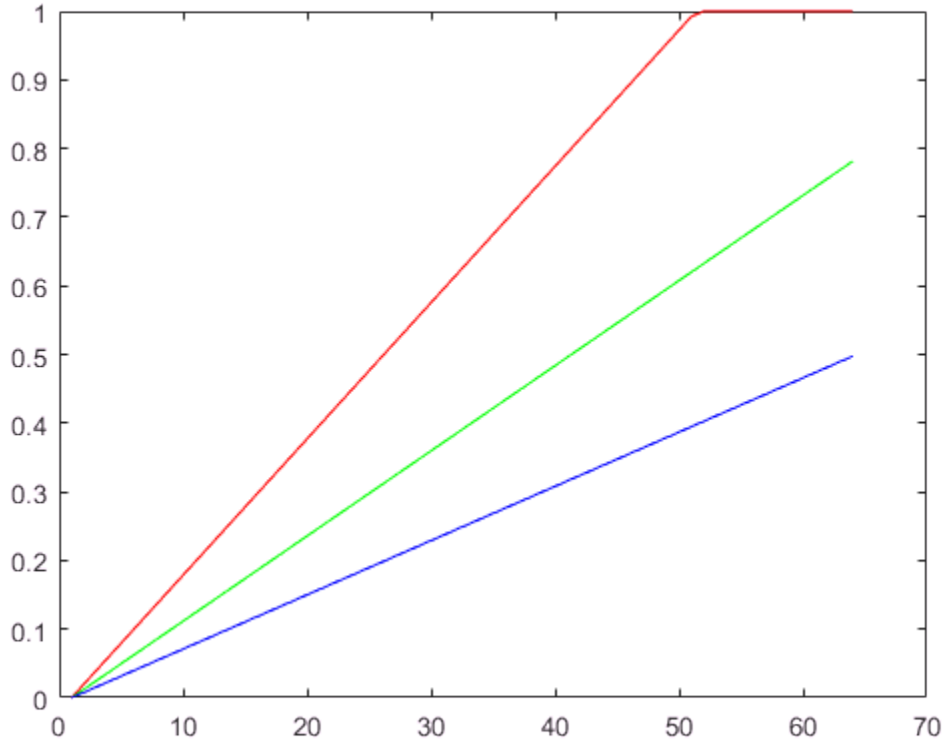

Summer Colormap

Plot the RGB values of the `summer` colormap.

```
rgbplot(summer)
```

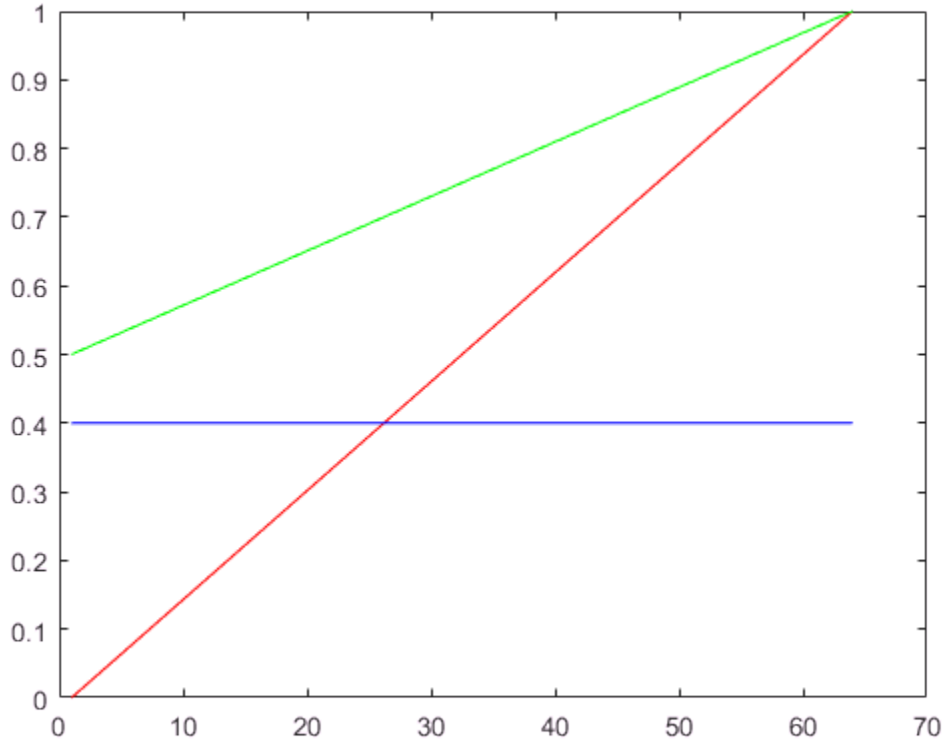

See Also

`colormap`

Introduced before R2006a

ribbon

Ribbon plot



Syntax

```
ribbon(Y)
ribbon(X,Y)
ribbon(X,Y,width)
ribbon(axes_handle,...)
h = ribbon(...)
```

Description

`ribbon(Y)` plots the columns of `Y` as three-dimensional ribbons of uniform width using `X = 1:size(Y,1)`. Ribbons advance along the *x*-axis centered on tick marks at unit intervals, three-quarters of a unit in width. Ribbon maps values in `X` to colors in colormap linearly. To change ribbon colors in the graph, change the `colormap`.

`ribbon(X,Y)` plots three dimensional ribbons for data in `Y`, centered at locations specified in `X`. `X` and `Y` are vectors or matrices of the same size. Additionally, `X` can be a row or a column vector, and `Y` a matrix with `length(X)` rows. When `Y` is a matrix, `ribbon` plots each column in `Y` as a ribbon at the corresponding `X` location.

`ribbon(X,Y,width)` specifies the width of the ribbons. The default is `0.75`. If `width = 1`, the ribbons touch, leaving no space between them when viewed down the *z*-axis. If `width > 1`, ribbons overlap and can intersect.

`ribbon(axes_handle,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = ribbon(...)` returns a vector of handles to surface graphics objects. `ribbon` returns one handle per strip.

Examples

Ribbon Plot

Create a ribbon plot of the `peaks` function.

```
[x,y] = meshgrid(-3:.5:3,-3:.1:3);
z = peaks(x,y);

figure
ribbon(y,z)
```

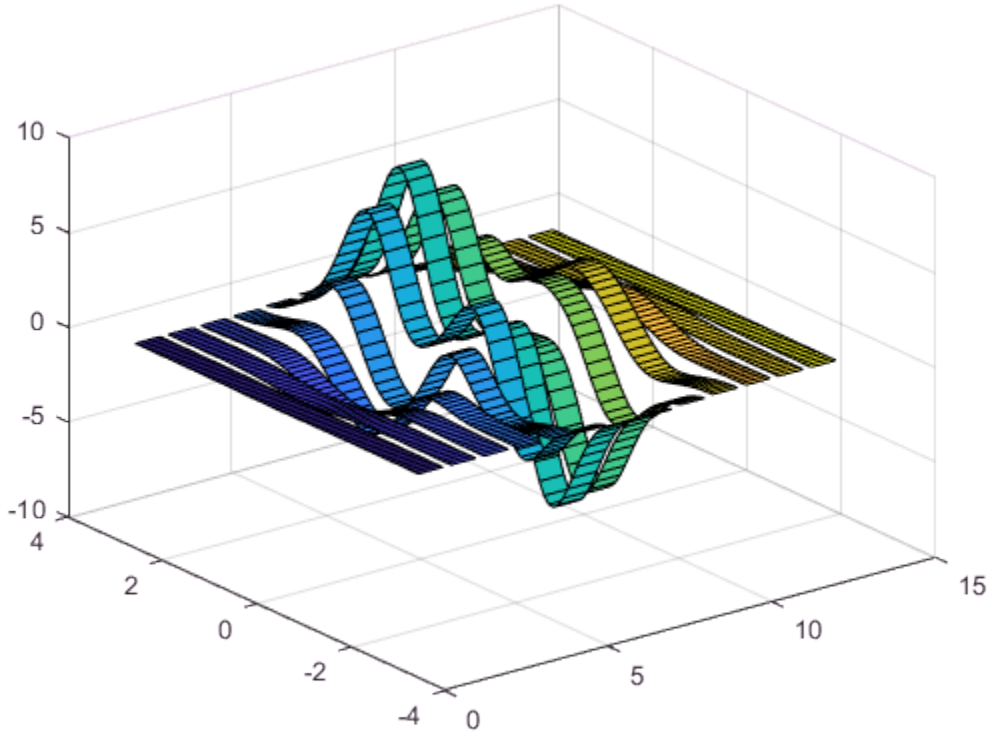

See Also

`plot` | `plot3` | `surface` | `waterfall`

Introduced before R2006a

rlim

Set or query *r*-axis limits for polar axes

Syntax

```
rlim(limits)
```

```
rlim('auto')
rlim('manual')
```

```
rl = rlim
m = rlim('mode')
```

```
___ = rlim(pax, ___)
```

Description

`rlim(limits)` specifies the *r*-axis limits for the current polar axes. Specify `limits` as a two-element vector of the form `[rmin rmax]`, where `rmax` is a numeric value greater than `rmin`.

`rlim('auto')` lets MATLAB choose the *r*-axis limits. This command sets the `RLimMode` property for the polar axes object to `'auto'`.

`rlim('manual')` prevents the limits from changing automatically. Use this option if you want to retain the current limits when adding new data to the polar axes using the `hold on` command. This command sets the `RLimMode` property for the polar axes object to `'manual'`.

`rl = rlim` returns a two-element vector containing the limits for the current polar axes.

`m = rlim('mode')` returns the current value of the limits mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify limits or set the mode to manual.

`___ = rlim(pax, ___)` uses the polar axes specified by `pax` instead of the current polar axes. Specify `pax` as the first input argument. Include additional input or output arguments only if the original syntax supported them.

Examples

Specify r-Axis Limits

Create a polar plot and change the *r*-axis limits.

```
theta = 0:0.01:2*pi;
rho = sin(2*theta).*cos(2*theta);
polarplot(theta,rho)
rlim([0 1])
```

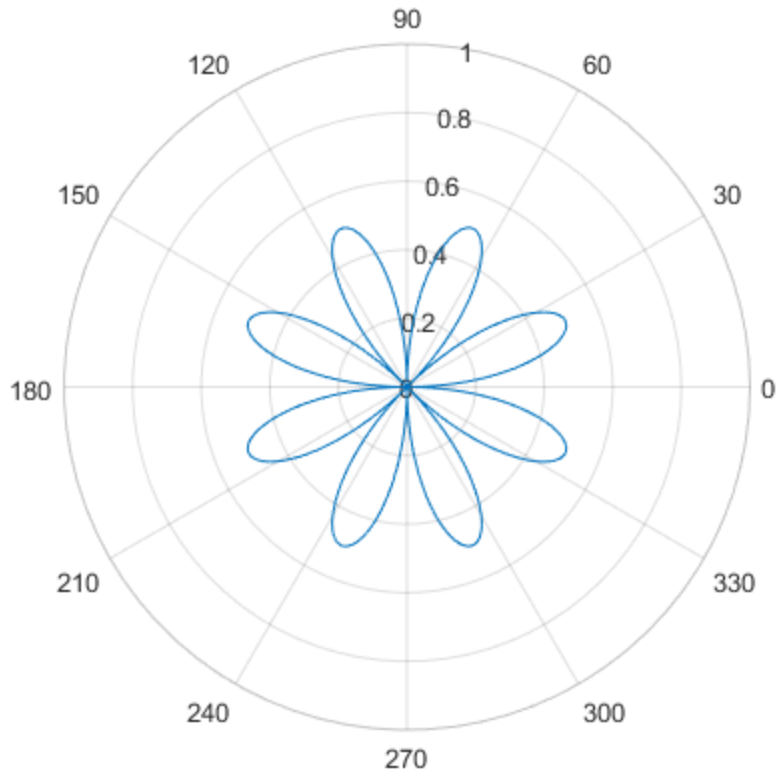

Set the limits back to the original values.

```
rlim('auto')
```

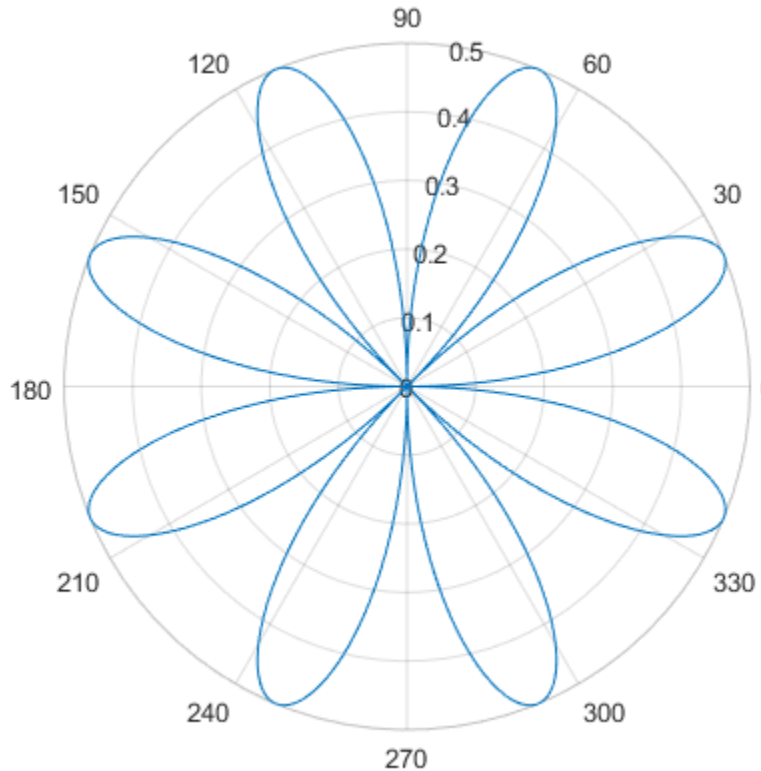

Plot Negative Radius Values

Create a polar plot using negative radius values. By default, `polarplot` reflects negative values through the origin.

```
theta = linspace(0,2*pi);
rho = sin(theta);
polarplot(theta,rho)
```

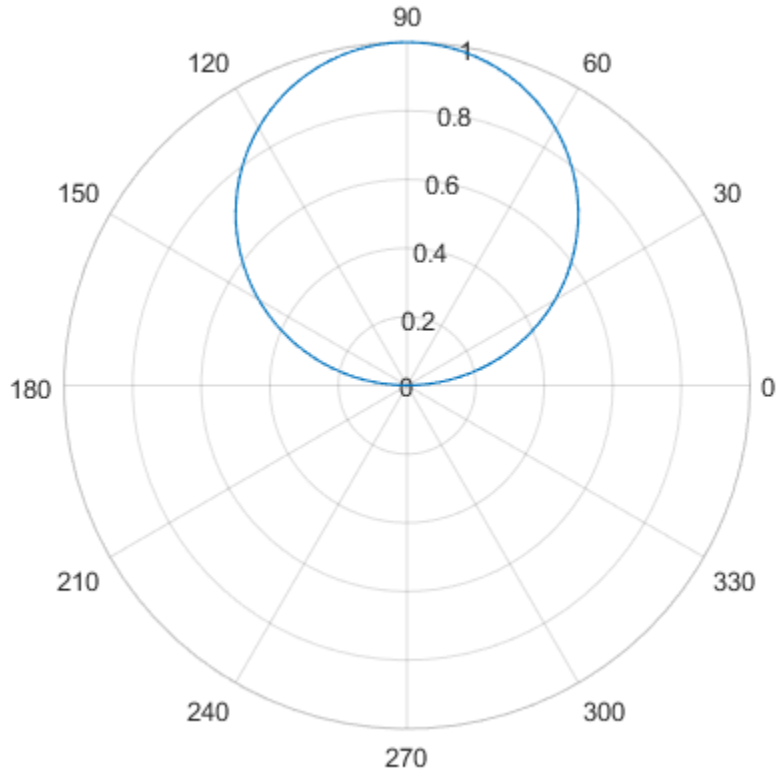

Change the limits of the *r*-axis so it ranges from -1 to 1.

```
rlim([-1 1])
```

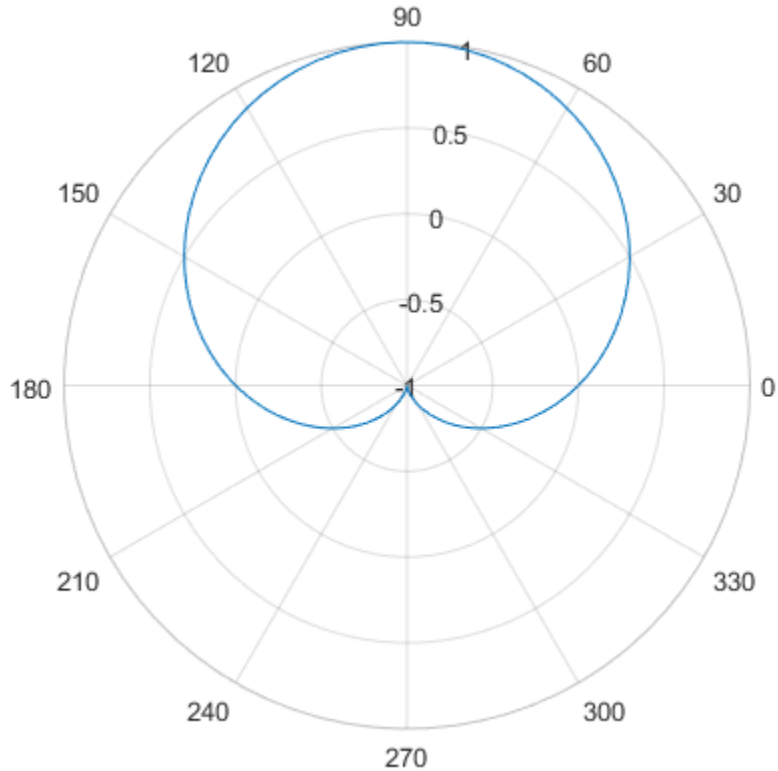

Return r-Axis Limits

Create a polar plot and return the *r*-axis limits.

```
theta = 0:0.01:2*pi;
rho = sin(2*theta).*cos(2*theta);
polarplot(theta,rho)
```

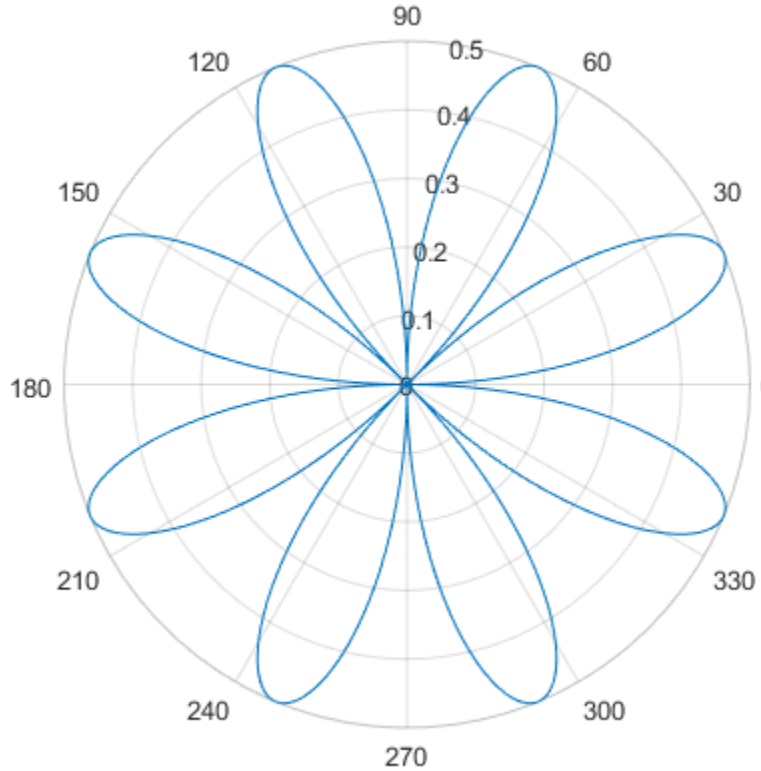


```
rl = rlim
```

```
rl =

         0    0.5000
```

Specify *r*-Axis Limits for Specific Polar Axes

Set the limits for a specific polar axes by specifying the polar axes object as the first input to `rlim`. Otherwise, `rlim` sets the limits for the current axes.

```
pax = polaraxes;
rlim(pax,[0 5])
```

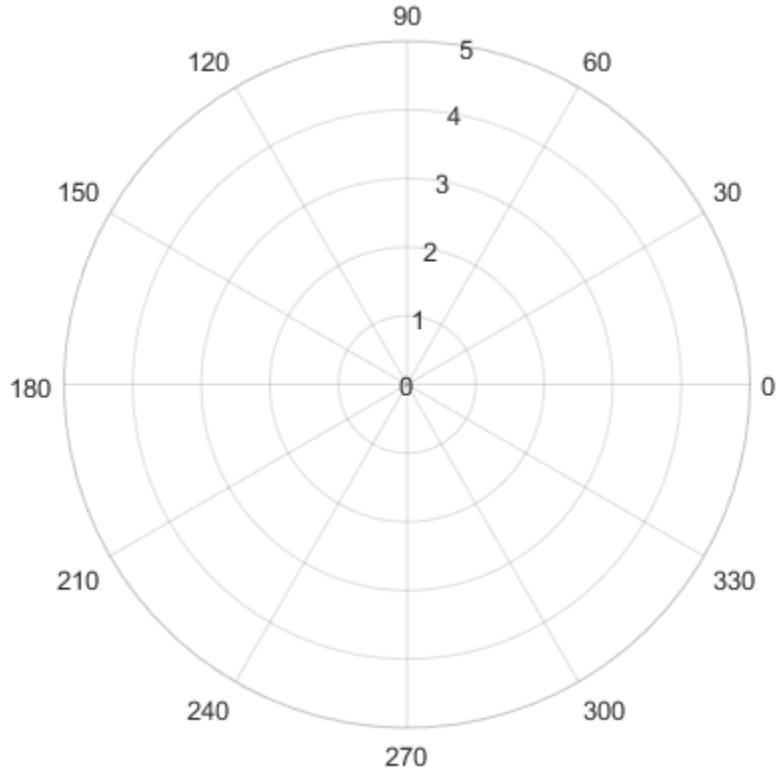

Input Arguments

`limits` — Minimum and maximum limits

two-element vector

Minimum and maximum limits, specified as a two-element vector of the form `[rmin rmax]`, where `rmax` is a numeric value greater than `rmin`. You can specify both limits, or specify one limit and let MATLAB automatically calculate the other.

- To automatically set the minimum limit to the minimum data value, specify the first element as `-inf`, for example, `rlim([-inf 0])`.

- To automatically set the maximum limit to the maximum data value, specify the second element as `inf`, for example, `rlim([0 inf])`.

When you specify the limits, the RLim property for the polar axes object updates to the specified values and the RLimMode property changes to `'manual'`.

Example: `rlim([0 1])`

`pax` — Polar axes object
polar axes object

Polar axes object. If you do not specify a polar axes object, then `rlim` sets the limits for the current polar axes.

Output Arguments

`rl` — Current limits
two-element vector

Current limits, returned as a two-element vector of the form `[rmin rmax]`. Querying the limits returns the value of the RLim property for the polar axes object.

`m` — Current limits mode
`'auto' | 'manual'`

Current limits mode, returned as one of these values:

- `'auto'` — The limits automatically update to reflect changes in the data.
- `'manual'` — The limits do not automatically update to reflect changes in the data.

Querying the *r*-axis limits mode returns the value of the RLimMode property for the polar axes object.

See Also

See Also

Functions
`deg2rad` | `polarplot` | `rad2deg` | `thetalim` | `title`

Properties
PolarAxes Properties

Introduced in R2016a

rmappdata

Remove application-defined data

Syntax

```
rmappdata(h,name)
```

Description

`rmappdata(h,name)` removes the application-defined data, `name`, from its association with the UI component, `h`.

See Also

`getappdata` | `isappdata` | `setappdata`

Introduced before R2006a

rmdir

Remove folder

Syntax

```
rmdir folderName
rmdir folderName s

status = rmdir( ___ )
[status,msg] = rmdir( ___ )
[status,msg,msgID] = rmdir( ___ )
```

Description

`rmdir folderName` removes the folder `folderName` from the current folder. `folderName` must be empty. If the operation is not successful, MATLAB throws an error to the Command Window.

`rmdir folderName s` attempts to remove the folder `folderName` and all subfolders and files in `folderName`, regardless of their write permissions. The result for read-only files follows the practices of the operating system.

`status = rmdir( ___ )` removes the specified folder and returns a status of `1` if the operation is successful. Otherwise, it returns `0`. Warnings and errors are not thrown to the Command Window. You can use this syntax with any of the input argument combinations in the previous syntaxes.

`[status,msg] = rmdir( ___ )` also returns the message text for any warning or error that occurs. You can use this syntax with any of the input argument combinations in the previous syntaxes.

`[status,msg,msgID] = rmdir( ___ )` also returns the message ID for any warning or error that occurs. You can use this syntax with any of the input argument combinations in the previous syntaxes.

Examples

Remove Folders from the Current Folder

Create and then remove the folders `myproject` and `myproject/myfiles` from the current folder.

```
mkdir myproject
mkdir myproject/myfiles

rmdir myproject/myfiles
rmdir myproject
```

Remove Non-Empty Folder

Remove the folder `myfiles`, which contains the files `myfile1.m` and `myfile2.m`.

Create the folder `myfiles` and move the files `myfile1.m` and `myfile2.m` into the folder.

```
mkdir myfiles
movefile myfile1.m myfiles
movefile myfile2.m myfiles
```

Remove the folder `myfiles`. The operation fails because `myfiles` is not empty, returning a status of 0 and an error message detailing why the operation failed.

```
[status, message, messageid] = rmdir('myfiles')
```

```
status =

  logical

   0


message =

    'No directories were removed.'


messageid =
```

```
    'MATLAB:RMDIR:NoDirectoriesRemoved'
```

Remove the folder `myfiles` using the 's' flag. A status of 1 and an empty `message` and `messageid` indicate that the operation is successful.

```
[status, message, messageid] = rmdir('myfiles', 's')
```

```
status =

  logical

   1


message =

  0×0 empty char array


messageid =

  0×0 empty char array
```

Input Arguments

`folderName` — Name of the folder to remove

character vector

Name of the folder to remove, specified as a character vector. `folderName` can be specified as an absolute or relative path.

Output Arguments

`status` — Indication of whether the attempt to remove the folder is successful

0 | 1

Indication of whether the attempt to remove the folder is successful, specified as `0` or `1`. If the attempt is successful, `status` is 1. Otherwise, `status` is 0.

Data Types: `logical`

`msg` — Error message
character vector

Error message, specified as a character vector. If an error or warning occurs, `msg` contains the message text of the error or warning. Otherwise, `msg` is empty, `''`.

`msgID` — Error message identifier
character vector

Error message identifier, specified as a character vector. If an error or warning occurs, `msgID` contains the message identifier of the error or warning. Otherwise, `msgID` is empty, `''`.

Alternative Functionality

In the Current Folder browser, right-click the folder name and select **Delete** from the context menu. To open the Current Folder browser, use the `filebrowser` command.

See Also

See Also

`cd` | `copyfile` | `delete` | `dir` | `mkdir` | `movefile`

Introduced before R2006a

rmdir

Class: FTP

Remove folder on FTP server

Syntax

```
rmdir(ftpobj,folder)
```

Description

`rmdir(ftpobj,folder)` removes the specified folder from the current folder on an FTP server.

Input Arguments

`ftpobj`

FTP object created by ftp.

`folder`

Character vector enclosed in single quotation marks that specifies the name of the folder to delete.

Examples

Remove the folder `temp` from the hypothetical FTP server `ftp.testsite.com`:

```
ts = ftp('ftp.testsite.com');
rmdir(ts,'temp');
```

See Also

delete | dir | mkdir | cd | ftp

Introduced before R2006a

rmfield

Remove fields from structure

Syntax

```
s = rmfield(s,field)
```

Description

`s = rmfield(s,field)` removes the specified field or fields from structure array `s`. Specify multiple fields using a cell array of character vectors. The dimensions of `s` remain the same.

Examples

Remove Single Field

Define a scalar structure with fields named `a`, `b`, and `c`.

```
s.a = 1;
s.b = 2;
s.c = 3;
```

Remove field `b`.

```
field = 'b';
s = rmfield(s,field)
```

```
s = struct with fields:
    a: 1
    c: 3
```

Remove Multiple Fields

Define a scalar structure with fields `first`, `second`, `third`, and `fourth`.

```
S.first = 1;
S.second = 2;
S.third = 3;
S.fourth = 4;
```

Remove fields `first` and `fourth`.

```
fields = {'first','fourth'};
S = rmfield(S,fields)
```

```
S = struct with fields:
    second: 2
     third: 3
```

Input Arguments

s — Input structure

structure array

Input structure, specified as a structure array.

Data Types: `struct`

field — Field name or names

character array | cell array of character vectors

Field name or names, specified as a character array or a cell array of character vectors.

Example: `'f1'`

Example: `{'f1';'f2'}`

Data Types: `char` | `cell`

See Also

See Also

`fieldnames` | `isfield` | `orderfields`

Topics

"Generate Field Names from Variables"

Introduced before R2006a

rmmissing

Remove missing entries

Syntax

```
R = rmmissing(A)
R = rmmissing(A,dim)
R = rmmissing( ___ ,Name,Value)
[R,TF] = rmmissing( ___ )
```

Description

`R = rmmissing(A)` removes missing entries from an array or table. If `A` is a vector, then `rmmissing` removes any entry that contains missing data. If `A` is a matrix or table, then `rmmissing` removes any row that contains missing data. Missing values are defined according to the data type of `A`:

- `NaN` — `double`, `single`, `duration`, and `calendarDuration`
- `NaT` — `datetime`
- `<missing>` — `string`
- `<undefined>` — `categorical`
- `' '` — `char`
- `{''}` — `cell` of character arrays

`R = rmmissing(A,dim)` specifies the dimension of `A` to operate along. By default, `rmmissing` operates along the first dimension whose size does not equal 1.

`R = rmmissing( ___ ,Name,Value)` specifies additional parameters for removing missing entries using one or more name-value pair arguments. For example, you can use `rmmissing('MinNumMissing',n)` to remove rows that contain at least `n` missing values.

`[R,TF] = rmmissing( ___ )` also returns a logical vector corresponding to the rows or columns of `A` that were removed.

Examples

Vector with NaN Values

Create a vector with NaN values and remove each NaN.

```
A = [1 3 NaN 6 NaN];
R = rmmissing(A)
```

```
R =

     1     3     6
```

Table with Multiple Data Types

Remove incomplete rows from a table with multiple data types.

First, create a table whose variables include `categorical`, `double`, and `char` data types.

```
A = table(categorical({'';'F';'M'}),[45;32;NaN],{'';'CA';'MA'},[6051;7234;NaN],...
    'VariableNames',{'Gender' 'Age' 'State' 'ID'})
```

```
A = 3×4 table
      Gender        Age    State      ID
    ____________    ___    _____    ____

    <undefined>      45    ''       6051
    F                32    'CA'     7234
    M               NaN    'MA'      NaN
```

Remove any row of the table that contains missing data.

```
R = rmmissing(A)
```

```
R = 1×4 table
    Gender    Age    State      ID
    ______    ___    _____    ____

    F         32     'CA'     7234
```

Only remove rows with missing values in the `Age` or `ID` table variables.

```
R = rmmissing(A,'DataVariables',{'Age','ID'})
```

```
R = 2×4 table
      Gender        Age    State     ID
    ____________    ___    _____    ____

    <undefined>     45     ''       6051
    F               32     'CA'     7234
```

Alternatively, use the `isnumeric` function to identify the numeric variables to operate on.

```
R = rmmissing(A,'DataVariables',@isnumeric)
```

```
R = 2×4 table
      Gender        Age    State     ID
    ____________    ___    _____    ____

    <undefined>     45     ''       6051
    F               32     'CA'     7234
```

Matrix with Missing Data

Create a matrix with missing data and remove any column (second dimension) containing two or more missing values. Return the new matrix and the logical row vector that indicates which columns of A were removed.

```
A = [NaN NaN 5 3 NaN 5 7 NaN 9 2;
     8 9 NaN 1 4 5 6 5 NaN 5;
     NaN 4 9 8 7 2 4 1 NaN 3]
```

```
A =

   NaN   NaN     5     3   NaN     5     7   NaN     9     2
     8     9   NaN     1     4     5     6     5   NaN     5
   NaN     4     9     8     7     2     4     1   NaN     3
```

```
[R,TF] = rmmissing(A,2,'MinNumMissing',2)
```

```
R =
```

```
   NaN     5     3   NaN     5     7   NaN     2
     9   NaN     1     4     5     6     5     5
     4     9     8     7     2     4     1     3


TF = 1×10 logical array
   1   0   0   0   0   0   0   0   1   0
```

Input Arguments

A — Input data

vector | matrix | table | timetable

Input data, specified as a vector, matrix, table, or timetable. If A is a `timetable`, then `rmmissing(A)` removes any row of A containing missing data and also removes the corresponding time vector element. If the time vector contains a `NaT` or `NaN`, then `rmmissing(A)` removes it from the time vector and also removes the corresponding row of A.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `table` | `timetable` | `categorical` | `datetime` | `duration` | `calendarDuration`

dim — Dimension to operate along

1 | 2

Dimension to operate along, specified as 1 or 2. By default, `rmmissing` operates along the first dimension whose size does not equal 1.

Consider a two-dimensional input array A.

- If `dim=1`, then `rmmissing` removes rows of A.



- If `dim=2`, then `rmmissing` removes columns of `A`.



Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `rmmissing(A,'DataVariables',{'Temperature','Altitude'})` removes rows of `A` that contain missing data in the `Temperature` or `Altitude` variables

`'MinNumMissing'` — Minimum number missing
non-negative scalar

Minimum number of missing entries required to remove a row or column, specified as the comma-separated pair consisting of `'MinNumMissing'` and a non-negative scalar, which is 1 by default.

Example: `'MinNumMissing',6`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'DataVariables'` — Table variables
variable name | cell array of variable names | numeric vector | logical vector | function handle

Table variables, specified as the comma-separated pair consisting of `'DataVariables'` and a variable name, a cell array of variable names, a numeric vector, a logical vector, or a function handle. When operating on the rows of `A`, `rmmissing` removes any row that has missing data in the column corresponding to the variables specified. When operating

on the columns of A, `rmmissing` removes the specified variables from the table. The value for `'DataVariables'` can be one of the following:

- A character vector specifying a single table variable name
- A cell array of character vectors where each element is a table variable name
- A vector of table variable indices
- A logical vector whose elements each correspond to a table variable, where `true` includes the corresponding variable and `false` excludes it
- A function handle that returns a logical scalar, such as `@isnumeric`

Example: `'Age'`

Example: `{'Height','Weight'}`

Example: `@iscategorical`

Data Types: `char` | `cell` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `function_handle`

Output Arguments

R — Data with missing entries removed

vector | matrix | table | timetable

Data with missing entries removed, returned as a vector, matrix, table, or timetable. The size of R depends on the number of removed rows or columns.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `table` | `timetable` | `categorical` | `datetime` | `duration` | `calendarDuration`

TF — Removed entry indicator

vector

Removed entry indicator, returned as a logical vector. The value 1 (`true`) corresponds to rows or columns in R that were removed. The value 0 (`false`) corresponds to unchanged rows and columns. The orientation and size of TF depends on A and the dimension of operation.

Data Types: `logical`

See Also

See Also

`fillmissing` | `ismissing` | `isnan` | `isnat` | `standardizeMissing`

Introduced in R2016b

rmpath

Remove folders from search path

Syntax

```
rmpath(folderName)
```

Description

`rmpath(folderName)` removes the specified folder from the search path.

Examples

Remove Folder from Search Path

Remove `/usr/local/matlab/mytools` from the search path.

```
rmpath('/usr/local/matlab/mytools')
```

Input Arguments

`folderName` — Name of folder
character vector

Name of folder to remove from the search path, specified as a character vector. Use the full path name for `folderName`.

Example: `'c:\matlab\work'`

Example: `'/home/user/matlab'`

See Also

See Also

`addpath` | `path` | `savepath`

Topics

"What Is the MATLAB Search Path?"

Introduced before R2006a

rmpref

Remove preference

Syntax

```
rmpref('group','pref')
rmpref('group',{'pref1','pref2',...'prefn'})
rmpref('group')
```

Description

`rmpref('group','pref')` removes the preference specified by `group` and `pref`. It is an error to remove a preference that does not exist.

`rmpref('group',{'pref1','pref2',...'prefn'})` removes each preference specified in the cell array of preference names. It is an error if any of the preferences do not exist.

`rmpref('group')` removes all the preferences for the specified `group`. It is an error to remove a group that does not exist.

Examples

```
addpref('mytoolbox','version','1.0')
rmpref('mytoolbox')
```

See Also

`addpref` | `ispref` | `getpref` | `setpref` | `uigetpref` | `uisetpref`

Introduced before R2006a

rng

Control random number generation

Syntax

```
rng(seed)
rng('shuffle')
rng(seed, generator)
rng('shuffle', generator)
rng('default')
scurr = rng
rng(s)
sprev = rng(...)
```

Description

Note: To use the `rng` function instead of `rand` or `randn` with the `'seed'`, `'state'`, or `'twister'` inputs, see the documentation on "Replace Discouraged Syntaxes of rand and randn".

`rng(seed)` seeds the random number generator using the nonnegative integer `seed` so that `rand`, `randi`, and `randn` produce a predictable sequence of numbers.

`rng('shuffle')` seeds the random number generator based on the current time. Thus, `rand`, `randi`, and `randn` produce a different sequence of numbers after each time you call `rng`.

`rng(seed, generator)` and `rng('shuffle', generator)` additionally specify the type of the random number generator used by `rand`, `randi`, and `randn`. The `generator` input is one of:

- `'twister'`: Mersenne Twister
- `'simdTwister'`: SIMD-oriented Fast Mersenne Twister
- `'combRecursive'`: Combined Multiple Recursive

- `'multFibonacci'`: Multiplicative Lagged Fibonacci
- `'v5uniform'`: Legacy MATLAB 5.0 uniform generator
- `'v5normal'`: Legacy MATLAB 5.0 normal generator
- `'v4'`: Legacy MATLAB 4.0 generator

`rng('default')` puts the settings of the random number generator used by `rand`, `randi`, and `randn` to their default values. This way, the same random numbers are produced as if you restarted MATLAB. The default settings are the Mersenne Twister with seed 0.

`scurr = rng` returns the current settings of the random number generator used by `rand`, `randi`, and `randn`. The settings are returned in a structure `scurr` with fields `'Type'`, `'Seed'`, and `'State'`.

`rng(s)` restores the settings of the random number generator used by `rand`, `randi`, and `randn` back to the values captured previously with a command such as `s = rng`.

`sprev = rng(...)` returns the previous settings of the random number generator used by `rand`, `randi`, and `randn` before changing the settings.

Examples

Example 1 — Retrieve and Restore Generator Settings

Save the current generator settings in `s`:

```
s = rng;
```

Call `rand` to generate a vector of random values:

```
x = rand(1,5)
```

```
x =

    0.8147    0.9058    0.1270    0.9134    0.6324
```

Restore the original generator settings by calling `rng`. Generate a new set of random values and verify that `x` and `y` are equal:

```
rng(s);
y = rand(1,5)

y =

    0.8147    0.9058    0.1270    0.9134    0.6324
```

Example 2 — Restore Settings for Legacy Generator

Use the legacy generator.

```
sprev = rng(0,'v5uniform')

sprev =
     Type: 'twister'
     Seed: 0
    State: [625x1 uint32]

x = rand

x =

    0.9501
```

Restore the previous settings by calling `rng`:

```
rng(sprev)
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Supports only the `'twister'`, `'v5normal'`, and `'v4'` generators.
- Does not support the `'shuffle'` input.
- For a MEX target:

- If extrinsic calls are disabled or `rng` is called inside a `parfor` loop, the output of `rng` in the MEX function is not compatible with the `rng` function in MATLAB. You cannot pass the output of `s = rng` from the MEX function to `rng` in MATLAB.
- If extrinsic calls are enabled and `rng` is not called from inside a `parfor` loop, only `rng` can access the data in the structure that `rng` returns.

See Also

See Also

`now` | `rand` | `randi` | `randn` | `RandStream`

Topics

"Generate Random Numbers That Are Repeatable"
"Generate Random Numbers That Are Different"
"Creating and Controlling a Random Number Stream"
"Why Do Random Numbers Repeat After Startup?"

Root Properties

Graphics environment and state information

Description

The `Root` object is the root of the graphics object tree. `Root` properties contain information about the graphics environment and the current state of the graphics system. Starting in R2014b, you can use dot notation to refer to a particular object and property:

```
r = groot;
fig = r.Children;
```

If you are using an earlier release, use the `get` function to query property values.

Display Information

`MonitorPositions` — Width and height of displays
n-by-4 matrix

This property is read-only.

Width and height of displays, returned as an n-by-4 matrix, where n is the number of displays. Each row corresponds to one display and is a four-element vector of the form `[x y width height]`. For example, if there are two displays, then the matrix has this form:

```
[x1 y1 width1 height1
 x2 y2 width2 height2]
```

The first two elements in each row indicate the display location with respect to the origin point. The last two elements in each row indicate the display size. The origin point is the lower-left corner of the primary display. If the units are pixels, then the origin point is `(1,1)`. For all other units, the origin point is `(0,0)`. The `Units` property determines the units of this measurement.

Note: MATLAB sets the display information values for this property at startup. The values are static. If your system display settings change, the values do not update. To refresh the values, restart MATLAB.

`PointerLocation` — Current location of pointer

two-element vector

Current location of pointer, specified as a two-element vector of the form `[x y]`. The `x` and `y` values are the coordinates of the pointer position measured from the origin point. The origin point is the lower-left corner of the primary display. If the units are pixels, then the origin point is `(1,1)`. For all other units, the origin point is `(0,0)`. The `Units` property determines the units of this measurement.

This property contains the current pointer location, even if the pointer is outside a MATLAB window. Move the pointer by changing the values of this property. On Macintosh systems, you cannot change the pointer location by setting this property.

Querying the `PointerLocation` property in a callback routine might return a value that is different from the location of the pointer when the callback was triggered. This difference results from delays in callback execution caused by competition for system resources.

Example: `[500 400]`

`ScreenDepth` — Number of bits that define each pixel color

scalar

Number of bits that define each pixel color, specified as a scalar. The default value depends on the computer. The maximum number of simultaneously displayed colors on the current graphics device equals 2 raised to the value of this property.

`ScreenPixelsPerInch` — Display resolution

scalar

This property is read-only.

Display resolution, returned as a scalar in pixels per inch. The value depends on the system.

- On Windows systems, the value is 96 DPI.
- On Macintosh systems, the value is 72 DPI.
- On Linux system, the value is determined by your system resolution.

Note: The `ScreenPixelsPerInch` property became a read-only property in R2015b. To change the size of text and other elements on the screen, adjust the display scaling for your operating system.

`ScreenSize` — Size of primary display

four-element vector

This property is read-only.

Size of primary display, returned as a four-element vector of the form `[left bottom width height]`.

- The `left` and `bottom` values are both `1` when the units are pixels, and `0` for all other units.
- The `width` and `height` values are the width and height of the display, respectively.

Note: Starting in R2015b on Windows systems, if the `Units` property is set to `'pixels'`, then the width and height values might differ from the screen size reported by the operating system. The values MATLAB reports are based on a pixel size of 1/96th of an inch. On Macintosh and Linux systems, the values match the size reported by the operating system.

Some important information to consider when using this property:

- The values might not represent the usable display size due to the presence of UIs, such as the Microsoft Windows task bar.
- MATLAB sets the display size values for this property at startup. The values are static. If your system display settings change, the display size values do not update. To refresh the values, restart MATLAB.

`FixedWidthFontName` — Font name for fixed-width font

character vector

Font name for fixed-width font, specified as a character vector giving the name of a system supported font. This property determines the font for axes, text, and uicontrols that have a `FontName` property set to `'FixedWidth'`. The default value depends on the system. `'Courier New'` is the default in systems that use Latin-based characters.

Specifying the `FixedWidthFontName` property eliminates the need to hardcode font names in MATLAB applications. MATLAB attempts to set `FixedWidthFontName` property to the correct value for the system.

If you are a MATLAB application developer and want to use a fixed-width font, set the `FontName` property for axes, text, and uicontrol objects to `'FixedWidth'` instead of

setting this root property. Users of the application can set the root property if they do not want to use the preselected value.

Example: `'Courier New'`

`Units` — Units for `MonitorPositions`, `ScreenSize`, and `PointerLocation`

`'pixels'` (default) | `'inches'` | `'centimeters'` | `'points'` | `'characters'` | `'normalized'`

Units for the `MonitorPositions`, `ScreenSize`, and `PointerLocation` properties, specified as one of the values shown in this table.

Units	Description
`'pixels'` (default)	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'points'`	Points. One point equals 1/72 inch.
`'normalized'`	Normalized with respect to the display. The lower left corner of the display maps to `(0,0)` and the upper right corner maps to `(1,1)`.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.

All units are measured from the lower-left corner of the primary display. If the units are pixels, then the lower-left corner maps to `(1,1)`. For all other units, the lower-left corner maps to `(0,0)`.

If you change the units, it is good practice to return it to its default value after completing your operation to prevent affecting other functions that assume the `Units` property is set to the default value.

Identifiers

`CallbackObject` — Object whose callback is executing

`[]` (default) | graphics object

This property is read-only.

Object whose callback is executing, returned as a graphics object. For more information, see the `gcbo` command.

`CurrentFigure` — Current figure

empty `GraphicsPlaceholder` (default) | figure object

Current figure, specified as a figure object. The current figure is typically the one most recently created, clicked on, or made current by calling the `figure` function. Setting this property makes a figure the current figure without sorting it to the front of other figures on the display. However, using the `figure` function to make a figure the current figure sorts that figure to the front of the display. To become the current figure, the `HandleVisibility` property of the figure must be set to `'on'`.

This property returns an empty `GraphicsPlaceholder` array if there are no figures. However, the `gcf` command always returns a figure object. If there are no figure objects, then `gcf` creates one.

`Type` — Type of graphics object

`'root'`

This property is read-only.

Type of graphics object, returned as `'root'`. The `Root` object handle is always visible using the `groot` function.

`Tag` — Tag to associate with root

`''` (default) | character vector

Tag to associate with root, specified as a character vector. There is only one `Root` object, which you can always access using the `groot` function.

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Parent/Child

`Parent` — Parent

empty `GraphicsPlaceholder`

The `Root` object has no parent. This property is always an empty `GraphicsPlaceholder`.

`Children` — Children

empty `GraphicsPlaceholder` | array of figure objects

Children, specified as an array of figure objects that have visible handles. The HandleVisibility property of the figure determines if the handle is visible or hidden. This property does not contain figures with hidden handles.

Change the order of the children to change the sorting order of the figures on the display.

`HandleVisibility` — Visibility of `Root` object handle

`'on'` (default) | `'callback'` | `'off'`

This property has no effect. The `Root` object handle is always visible using the `groot` function.

`ShowHiddenHandles` — Hidden handle display

`'off'` (default) | `'on'`

Hidden handle display, specified as one of these values:

- `'off'` — Do not display hidden object handles. The `HandleVisibility` property of the object determines if the handle is visible or hidden.
- `'on'` — Expose all object handles regardless of the `HandleVisibility` property.

See Also

See Also

`groot`

Topics

"Access Property Values"
"Graphics Object Properties"

roots

Polynomial roots

Syntax

```
r = roots(p)
```

Description

`r = roots(p)` returns the roots of the polynomial represented by `p` as a column vector. Input `p` is a vector containing `n+1` polynomial coefficients, starting with the coefficient of x^n. A coefficient of `0` indicates an intermediate power that is not present in the equation. For example, `p = [3 2 -2]` represents the polynomial $3x^2 + 2x - 2$.

The `roots` function solves polynomial equations of the form $p_1x^n + ... + p_nx + p_{n+1} = 0$. Polynomial equations contain a single variable with nonnegative exponents.

Examples

Roots of Quadratic Polynomial

Solve the equation $3x^2 - 2x - 4 = 0$.

Create a vector to represent the polynomial, then find the roots.

```
p = [3 -2 -4];
r = roots(p)
```

```
r =

    1.5352
   -0.8685
```

Roots of Quartic Polynomial

Solve the equation $x^4 - 1 = 0$.

Create a vector to represent the polynomial, then find the roots.

```
p = [1 0 0 0 -1];
r = roots(p)
```

```
r =
  -1.0000 + 0.0000i
   0.0000 + 1.0000i
   0.0000 - 1.0000i
   1.0000 + 0.0000i
```

Input Arguments

p — Polynomial coefficients

vector

Polynomial coefficients, specified as a vector. For example, the vector `[1 0 1]` represents the polynomial $x^2 + 1$, and the vector `[3.13 -2.21 5.99]` represents the polynomial $3.13x^2 - 2.21x + 5.99$.

For more information, see "Create and Evaluate Polynomials".

Data Types: `single` | `double`
Complex Number Support: Yes

Tips

- Use the `poly` function to obtain a polynomial from its roots: `p = poly(r)`. The `poly` function is the inverse of the `roots` function.
- Use the `fzero` function to find the roots of nonlinear equations. While the `roots` function works only with polynomials, the `fzero` function is more broadly applicable to different types of equations.

Algorithms

The `roots` function considers `p` to be a vector with `n+1` elements representing the `n`th degree characteristic polynomial of an `n`-by-`n` matrix, `A`. The roots of the polynomial are calculated by computing the eigenvalues of the companion matrix, `A`.

```
A = diag(ones(n-1,1),-1);
A(1,:) = -p(2:n+1)./p(1);
r = eig(A)
```

The results produced are the exact eigenvalues of a matrix within roundoff error of the companion matrix, `A`. However, this does not mean that they are the exact roots of a polynomial whose coefficients are within roundoff error of those in `p`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Output is variable-size and always complex.
- Roots are not always in the same order as in MATLAB.
- Roots of poorly conditioned polynomials do not always match MATLAB.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`fzero` | `poly` | `polyval` | `residue`

Topics

"Roots of Polynomials"

"Create and Evaluate Polynomials"

Introduced before R2006a

rose

Angle histogram plot

Compatibility

`rose` is not recommended. Use `polarhistogram` instead.

Syntax

```
rose(theta)
rose(theta,x)
rose(theta,nbins)
rose(ax,...)
h = rose(...)
[tout,rout] = rose(...)
```

Description

`rose(theta)` creates an angle histogram, which is a polar plot showing the distribution of values grouped according to their numeric range, showing the distribution of `theta` in 20 angle bins or less. The vector `theta`, expressed in radians, determines the angle of each bin from the origin. The length of each bin reflects the number of elements in `theta` that fall within a group, which ranges from 0 to the greatest number of elements deposited in any one bin.

`rose(theta,x)` uses the vector `x` to specify the number and the locations of bins. `length(x)` is the number of bins and the values of `x` specify the center angle of each bin. For example, if `x` is a five-element vector, `rose` distributes the elements of `theta` in five bins centered at the specified `x` values.

`rose(theta,nbins)` plots `nbins` equally spaced bins in the range `[0,2*pi]`. The default is `20`.

`rose(ax,...)` plots into the axes `ax` instead of the current axes (`gca`).

`h = rose(...)` returns the handle of the line object used to create the graph.

`[tout,rout] = rose(...)` returns the vectors `tout` and `rout` so `polar(tout,rout)` generates the histogram for the data. This syntax does not generate a plot.

Examples

Create Angle Histogram

Create an angle histogram of values between 0 and 2π. Distribute the data among 10 bins.

```
theta = [0.4 1.4 3.1 2.3 0.4 2.5 3.9 2.8 2.3 1.6 4.6 4.5 6.1 3.9 5.1];
rose(theta,10)
```

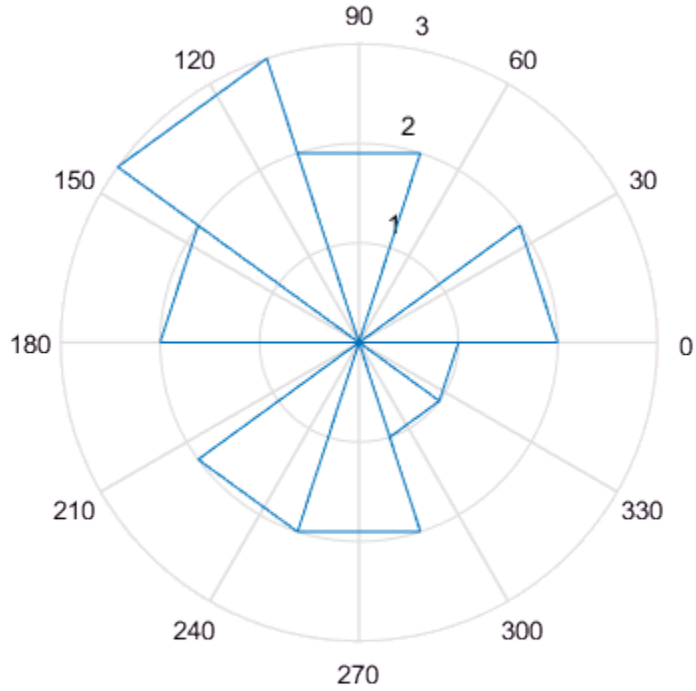

See Also

compass | histogram | polarhistogram | polarplot

Introduced before R2006a

rosser

Classic symmetric eigenvalue test problem

Syntax

```
A = rosser
A = rosser(classname)
```

Description

`A = rosser` returns the Rosser matrix in double precision.

`A = rosser(classname)` returns the Rosser matrix with a class specified by `classname`. Specify `classname` as `'single'` to return the Rosser matrix in single precision.

Examples

Generate the Rosser matrix

`rosser` returns the Rosser matrix.

```
rosser
```

```
ans =

   611   196  -192   407     -8    -52    -49     29
   196   899   113  -192    -71    -43     -8    -44
  -192   113   899   196     61     49      8     52
   407  -192   196   611      8     44     59    -23
    -8   -71    61     8    411   -599    208    208
   -52   -43    49    44   -599    411    208    208
   -49    -8     8    59    208    208     99   -911
    29   -44    52   -23    208    208   -911     99
```

Generate matrix of class 'single'

Specify `classname` as `single` to return a Rosser matrix of that class.

```
Y = rosser('single')
```

```
Y = 8×8 single matrix

   611   196  -192   407     -8    -52    -49     29
   196   899   113  -192    -71    -43     -8    -44
  -192   113   899   196     61     49      8     52
   407  -192   196   611      8     44     59    -23
    -8   -71    61     8    411   -599    208    208
   -52   -43    49    44   -599    411    208    208
   -49    -8     8    59    208    208     99   -911
    29   -44    52   -23    208    208   -911     99
```

```
whos('Y')
```

```
  Name      Size            Bytes  Class     Attributes

  Y         8x8               256  single
```

Input Arguments

`classname` — Input class
`'double'` (default) | `'single'`

Input class, specified as `'double'` (default) or `'single'`. `rosser(C)` produces a matrix of the specified class.

Definitions

Rosser Matrix

The Rosser matrix is a well known matrix used, for example, to evaluate eigenvalue algorithms. The matrix is 8-by-8 with integer elements. It has:

- A double eigenvalue

- Three nearly equal eigenvalues
- Dominant eigenvalues of the opposite sign
- A zero eigenvalue
- A small, nonzero eigenvalue

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`eig`

Introduced before R2006a

rot90

Rotate array 90 degrees

Syntax

```
B = rot90(A)
B = rot90(A,k)
```

Description

`B = rot90(A)` rotates array `A` counterclockwise by 90 degrees. For multidimensional arrays, `rot90` rotates in the plane formed by the first and second dimensions.

`B = rot90(A,k)` rotates array `A` counterclockwise by `k*90` degrees, where `k` is an integer.

Examples

Rotate Column Vector

Create a column vector of sequential elements.

```
A = (1:5)'
```

```
A =

     1
     2
     3
     4
     5
```

Rotate `A` counterclockwise by 90 degrees using `rot90`.

```
B = rot90(A)
```

```
B =
```

```
     1     2     3     4     5
```

The result, B, has the same elements as A but a different orientation.

Rotate Multidimensional Array

Create a 3-by-3-by-2 cell array of characters.

```
A = cat(3,{'a' 'b' 'c';'d' 'e' 'f';'g' 'h' 'i'},{'j' 'k' 'l';'m' 'n' 'o';'p' 'q' 'r'})
```

```
A = 3×3×2 cell array

(:,:,1) =

    'a'    'b'    'c'
    'd'    'e'    'f'
    'g'    'h'    'i'


(:,:,2) =

    'j'    'k'    'l'
    'm'    'n'    'o'
    'p'    'q'    'r'
```

Rotate the cell array by 270 degrees.

```
B = rot90(A,3)
```

```
B = 3×3×2 cell array

(:,:,1) =

    'g'    'd'    'a'
    'h'    'e'    'b'
    'i'    'f'    'c'


(:,:,2) =

    'p'    'm'    'j'
    'q'    'n'    'k'
```

```
    'r'    'o'    'l'
```

The function rotates each page of the array independently. Since a full 360 degree rotation (`k = 4`) leaves the array unchanged, `rot90(A,3)` is equivalent to `rot90(A,-1)`.

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `cell` | `categorical` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

k — Rotation constant

integer

Rotation constant, specified as an integer. Specify `k` to rotate by `k*90` degrees rather than nesting calls to `rot90`.

Example: `rot90(A,-2)` rotates `A` by -180 degrees and is equivalent to `rot90(A,2)`, which rotates by 180 degrees.

Tips

- Use the `flip` function to flip arrays in any dimension.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays for the first argument.

See Also

See Also

`flip` | `fliplr` | `flipud`

Introduced before R2006a

rotate

Rotate object about specified origin and direction

Syntax

```
rotate(h,direction,alpha)
rotate(...,origin)
```

Description

The `rotate` function rotates a graphics object in three-dimensional space.

`rotate(h,direction,alpha)` rotates the graphics object `h` by `alpha` degrees. Specify `h` as a surface, patch, line, text, or image object. `direction` is a two- or three-element vector that describes the axis of rotation in conjunction with the origin of the axis of rotation. The default origin of the axis of rotation is the center of the plot box. This point is not necessarily the origin of the axes.

Positive `alpha` is defined as the righthand-rule angle about the direction vector as it extends from the origin of rotation.

If `h` is an array of handles, all objects must be children of the same axes.

`rotate(...,origin)` specifies the origin of the axis of rotation as a three-element vector $[x_0,y_0,z_0]$.

Examples

Rotate Plot Around *x*-Axis

Create a surface plot of the `peaks` function and return the surface handle.

```
hSurface = surf(peaks(20));
```

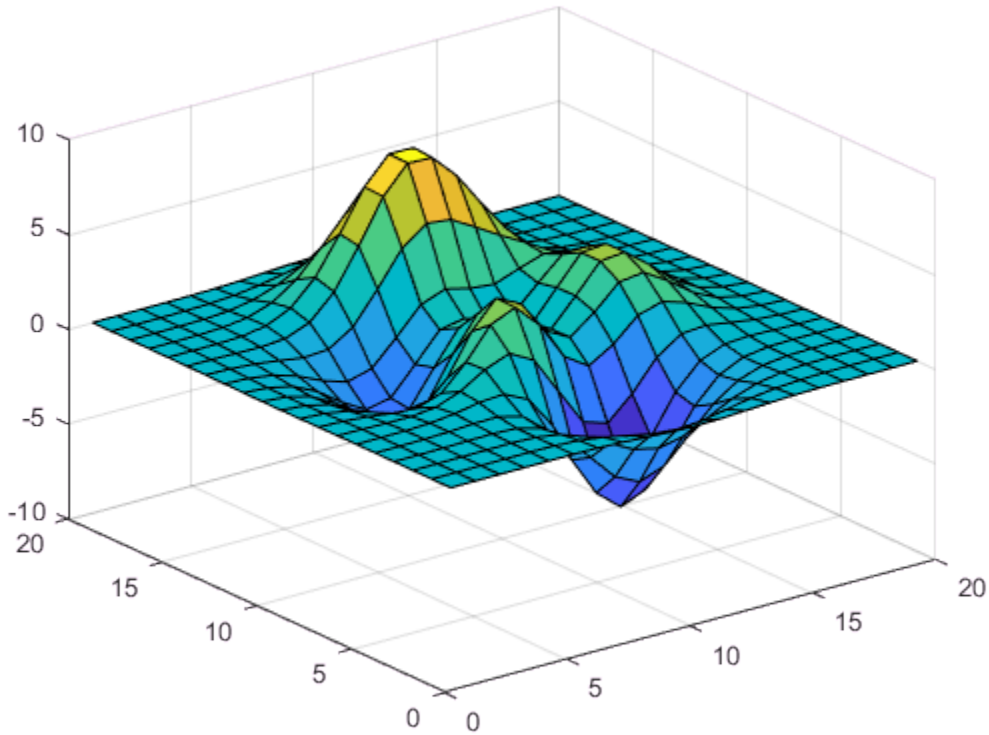

Rotate the surface plot 25 degrees around its x-axis.

```
direction = [1 0 0];
rotate(hSurface,direction,25)
```

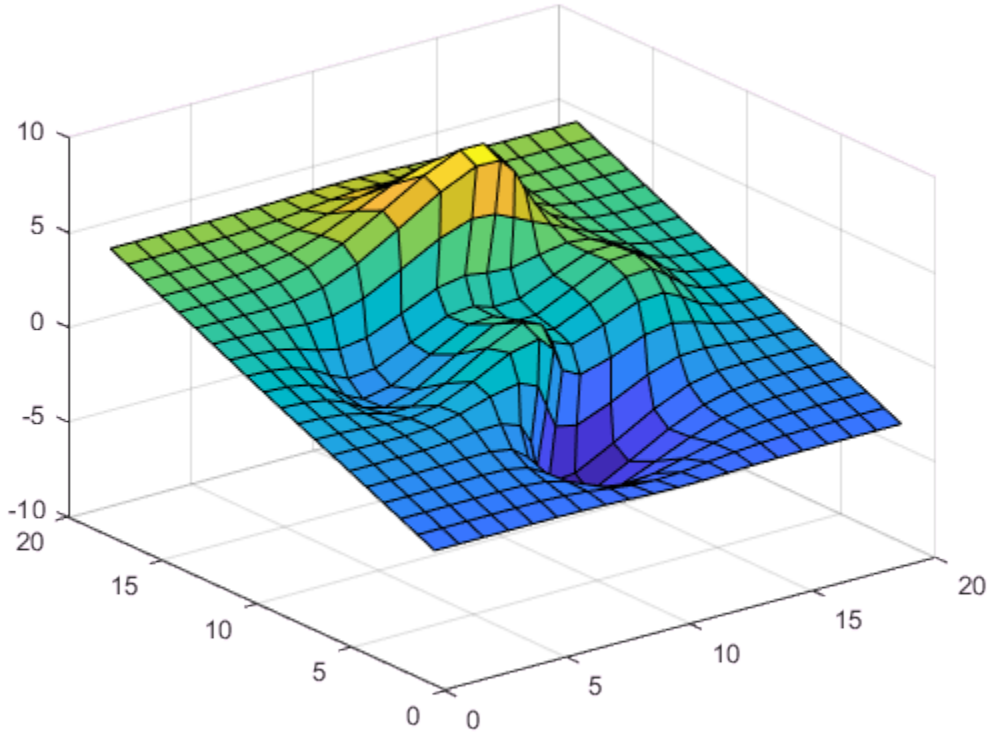

Rotate Plot Around *y*-Axis

Create a surface plot of the `peaks` function and return the surface handle.

```
hSurface = surf(peaks(20));
```

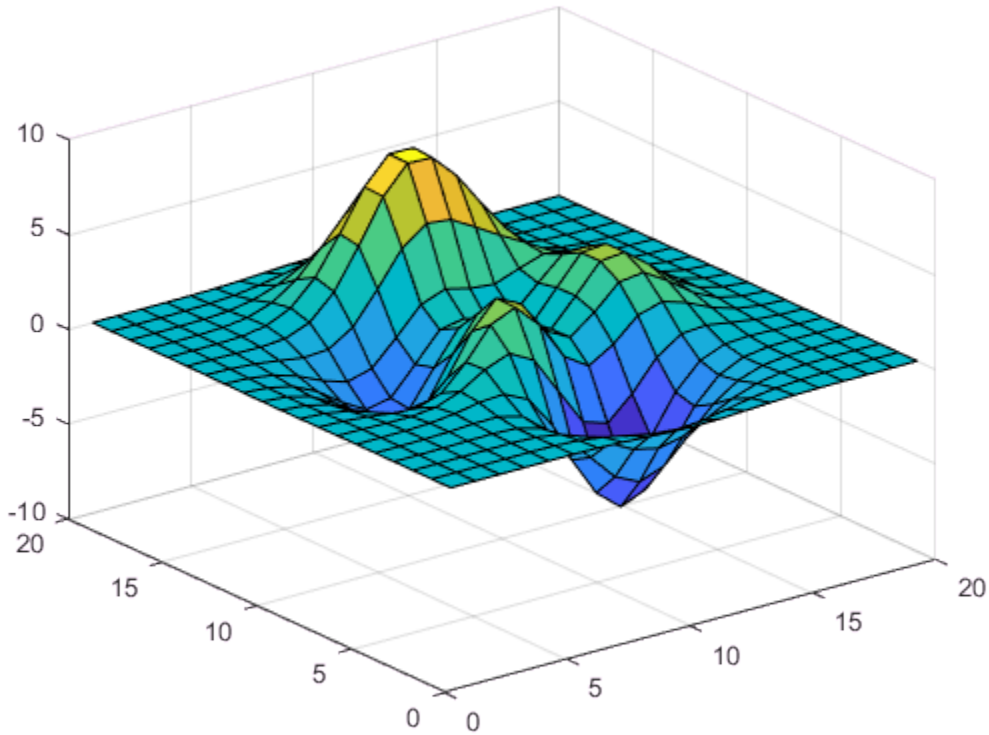

Rotate the surface plot 25 degrees around its *y*-axis.

```
direction = [0 1 0];
rotate(hSurface,direction,25)
```

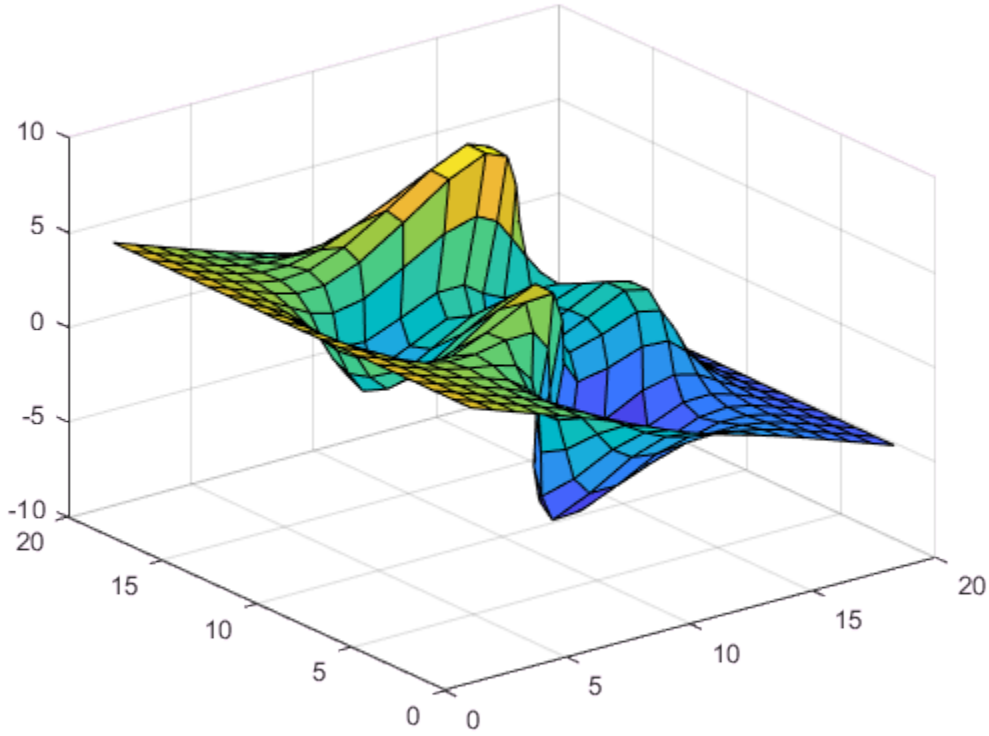

Rotate Plot Around *x*-Axis and *y*-Axis

Create a surface plot of the `peaks` function and return the surface handle.

```
hSurface = surf(peaks(20));
```

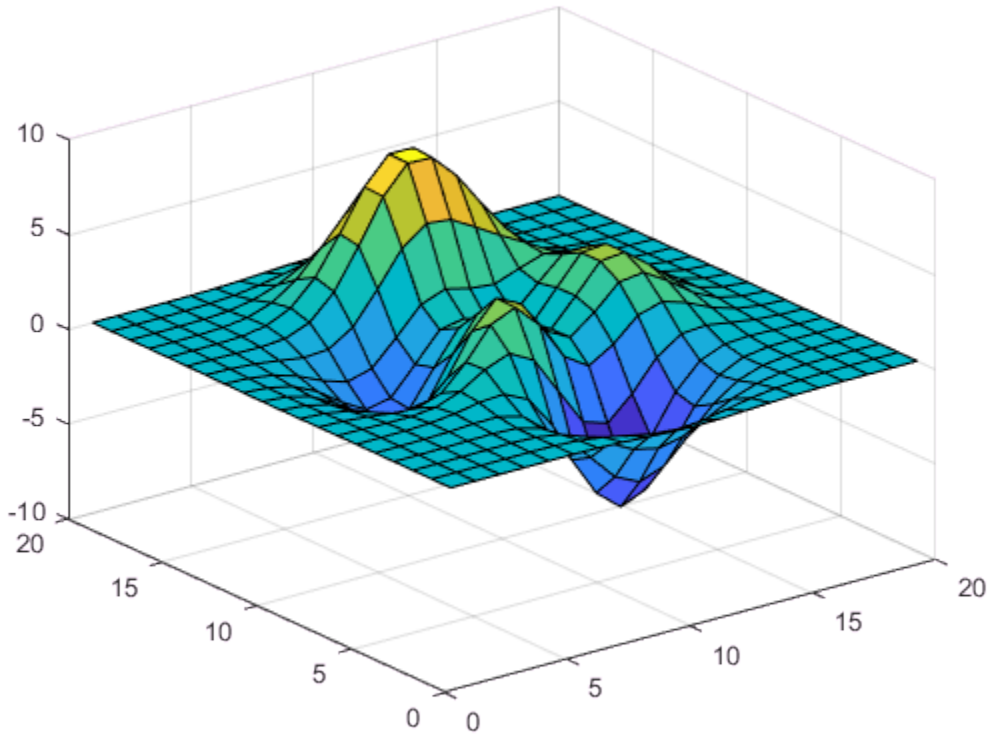

Rotate the surface plot 25 degrees around its x-axis and y-axis.

```
direction = [1 1 0];
rotate(hSurface,direction,25)
```

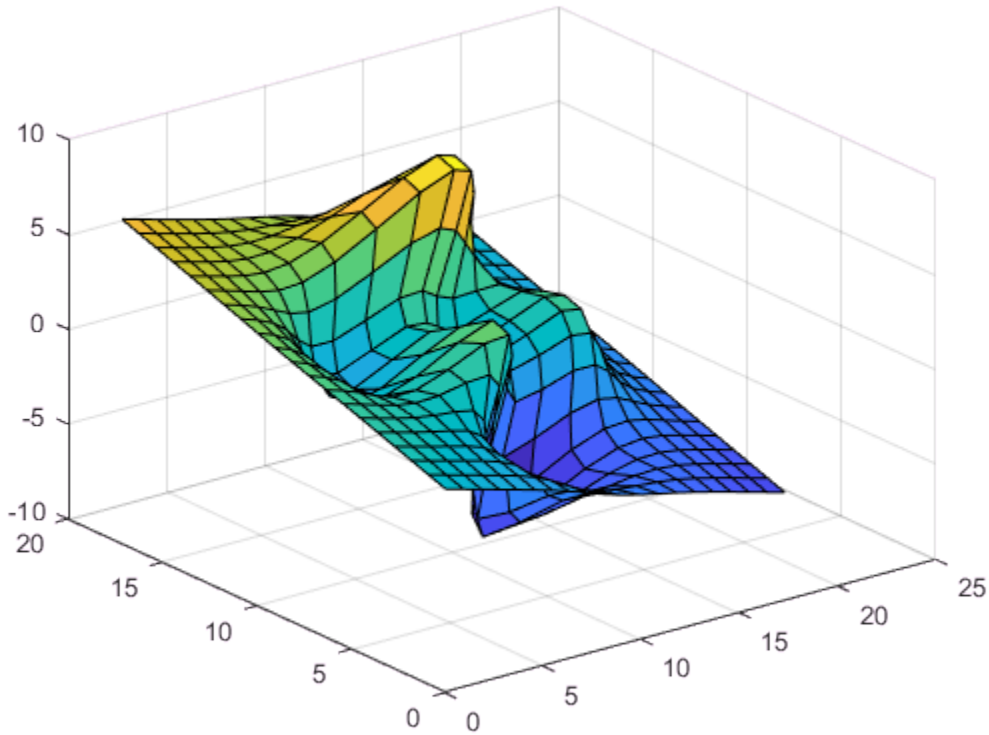

Tips

The rotation transformation modifies the object's data. This technique is different from that used by `view` and `rotate3d`, which modify only the viewpoint.

The axis of rotation is defined by an origin of rotation and a point `P`. Specify `P` as the spherical coordinates `[theta phi]` or as the Cartesian coordinates $[x_p, y_p, z_p]$.

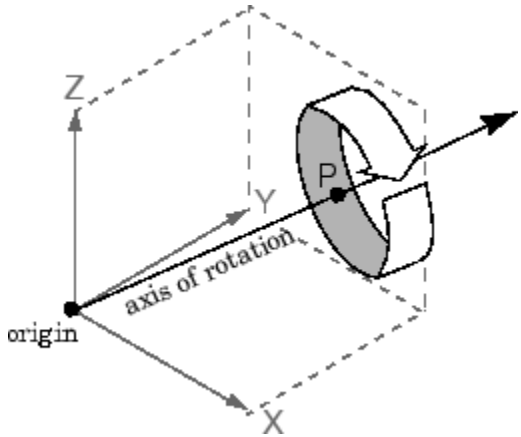

In the two-element form for `direction`, `theta` is the angle in the *x*-*y* plane counterclockwise from the positive *x*-axis. `phi` is the elevation of the direction vector from the *x*-*y* plane.

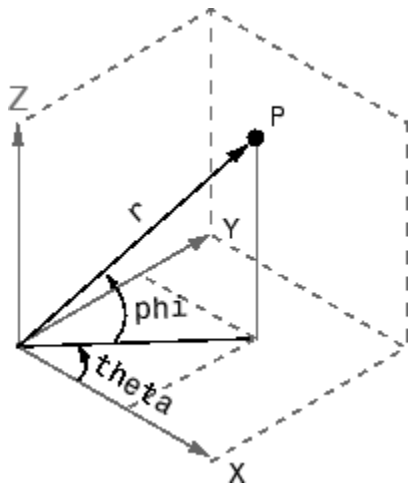

The three-element form for `direction` specifies the axis direction using Cartesian coordinates. The direction vector is the vector from the origin of rotation to `P`.

Tips

`rotate` changes the values of the `Xdata`, `Ydata`, and `Zdata` properties to rotate graphics objects.

See Also

`rotate3d` | `sph2cart` | `view`

Introduced before R2006a

rotate3d

Rotate 3-D view using mouse

Syntax

```
rotate3d on
rotate3d off
rotate3d
rotate3d(figure_handle,...)
rotate3d(axes_handle,...)
h = rotate3d(figure_handle)
```

Description

`rotate3d on` enables mouse-base rotation on all axes within the current figure.

`rotate3d off` disables interactive axes rotation in the current figure.

`rotate3d` toggles interactive axes rotation in the current figure.

`rotate3d(figure_handle,...)` enables rotation within the specified figure instead of the current figure.

`rotate3d(axes_handle,...)` enables rotation only in the specified axes.

`h = rotate3d(figure_handle)` returns a rotate3d *mode object* for figure figure_handle for you to customize the mode's behavior.

Using Rotate Mode Objects

You access the following properties of rotate mode objects.

- `FigureHandle <handle>` — The associated figure handle, a read-only property that cannot be set
- *`Enable`* `'on'|'off'` — Specifies whether this figure mode is currently enabled on the figure

- *RotateStyle* `'orbit'|'box'` — Sets the method of rotation

  `'orbit'` rotates the entire axes; `'box'` rotates a plot-box outline of the axes.

Rotate3D Mode Callbacks

You can program the following callbacks for rotate3d mode operations.

- `ButtonDownFilter <function_handle>` — Function to intercept `ButtonDown` events

  The application can inhibit the rotate operation under circumstances the programmer defines, depending on what the callback returns. The input function handle should reference a function with two implicit arguments (similar to handle callbacks):

  ```
  function [res] = myfunction(obj,event_obj)
  % obj          handle to the object that has been clicked on
  % event_obj    handle to event data object (empty in this release)
  % res [output] logical flag to determine whether the rotate
  %              operation should take place or the 'ButtonDownFcn'
  %              property of the object should take precedence
  ```

- `ActionPreCallback <function_handle>` — Function to execute before rotating

  Set this callback to listen to when a rotate operation will start. The input function handle should reference a function with two implicit arguments (similar to graphics object callbacks):

  ```
  function myfunction(obj,event_obj)
  % obj         handle to the figure that has been clicked on
  % event_obj   object containing struct of event data
  ```

  The event data has the following field:

`Axes`	The handle of the axes that is being panned

- `ActionPostCallback <function_handle>` — Function to execute after rotating

  Set this callback to listen to when a rotate operation has finished. The input function handle should reference a function with two implicit arguments (similar to graphics object callbacks):

  ```
  function myfunction(obj,event_obj)
  % obj         handle to the figure that has been clicked on
  ```

```
% event_obj   object containing struct of event data (same as the
%             event data of the 'ActionPreCallback' callback)
```

Rotate3D Mode Utility Functions

The following functions in pan mode query and set certain of its properties.

- `flags = isAllowAxesRotate(h,axes)` — Function querying permission to rotate axes

  Calling the function `isAllowAxesRotate` on the rotate3d object, `h`, with a vector of axes handles, `axes`, as input will return a logical array of the same dimension as the axes handle vector which indicate whether a rotate operation is permitted on the axes objects.
- `setAllowAxesRotate(h,axes,flag)` — Function to set permission to pan axes

  Calling the function `setAllowAxesRotate` on the rotate3d object, `h`, with a vector of axes handles, `axes`, and a logical scalar, `flag`, will either allow or disallow a rotate operation on the axes objects.

Examples

Example 1

Rotate the plot using the mouse:

```
surf(peaks);
rotate3d on;
```

Example 2

Rotate the plot using the "Plot Box" rotate style:

```
surf(peaks);
h = rotate3d;
h.RotateStyle = 'box';
h.Enable = 'on';
```

Example 3

Create two axes as subplots and then prevent one from rotating:

```
ax1 = subplot(1,2,1);
surf(peaks);
h = rotate3d;
h.Enable = 'on';
ax2 = subplot(1,2,2);
surf(membrane);
setAllowAxesRotate(h,ax2,false); % disable rotating for second plot
```

Example 4

Create a buttonDown callback for rotate mode objects to trigger. Copy the following code to a new file, execute it, and observe rotation behavior:

```
function demo_mbd
% Allow a line to have its own 'ButtonDownFcn' callback
hLine = plot(rand(1,10),'ButtonDownFcn','disp(''This executes'')');
hLine.Tag = 'DoNotIgnore';
h = rotate3d;
h.ButtonDownFilter = @mycallback;
h.Enable = 'on';
% mouse-click on the line
function [flag] = mycallback(obj,event_obj)
% If the tag of the object is 'DoNotIgnore', then return true
objTag = obj.Tag;
if strcmpi(objTag,'DoNotIgnore')
   flag = true;
else
   flag = false;
end
```

Example 5

Create callbacks for pre- and post-buttonDown events for rotate3D mode objects to trigger. Copy the following code to a new file, execute it, and observe rotation behavior:

```
function demo_mbd2
% Listen to rotate events
surf(peaks);
```

```
h = rotate3d;
h.ActionPreCallback = @myprecallback;
h.ActionPostCallback = @mypostcallback;
h.Enable = 'on';

function myprecallback(obj,evd)
disp('A rotation is about to occur.');

function mypostcallback(obj,evd)
newView = round(evd.Axes.View);
msgbox(sprintf('The new view is [%d %d].',newView));
```

Tips

When enabled, `rotate3d` provides continuous rotation of axes and the objects it contains through mouse movement. A numeric readout appears in the lower left corner of the figure during rotation, showing the current azimuth and elevation of the axes. Releasing the mouse button removes the animated box and the readout. This differs from the `camorbit` function in that while the `rotate3d` tool modifies the `View` property of the axes, the `camorbit` function fixes the aspect ratio and modifies the `CameraTarget`, `CameraPosition` and `CameraUpVector` properties of the axes. See Axes Properties for more information.

You can also enable 3-D rotation from the figure **Tools** menu or the figure toolbar.

You can create a `rotate3d` mode object once and use it to customize the behavior of different axes, as example 3 illustrates. You can also change its callback functions on the fly.

Note: Do not change figure callbacks within an interactive mode. While a mode is active (when panning, zooming, etc.), you will receive a warning if you attempt to change any of the figure's callbacks and the operation will not succeed. The one exception to this rule is the figure `WindowButtonMotionFcn` callback, which can be changed from within a mode. Therefore, if you are creating a UI that updates a figure's callbacks, the UI should some keep track of which interactive mode is active, if any, before attempting to do this.

When you assign different 3-D rotation behaviors to different `subplot` axes via a mode object and then link them using the `linkaxes` function, the behavior of the axes you

manipulate with the mouse will carry over to the linked axes, regardless of the behavior you previously set for the other axes.

Alternatives

Use the Rotate3D tool on the figure toolbar to enable and disable rotate3D mode on a plot, or select **Rotate 3D** from the figure's **Tools** menu. For details, see “Rotate in 3-D”.

See Also

`camorbit` | `pan` | `rotate` | `view` | `zoom`

Introduced before R2006a

round

Round to nearest decimal or integer

Syntax

```
Y = round(X)
Y = round(X,N)
Y = round(X,N,type)

Y = round(t)
Y = round(t,unit)
```

Description

`Y = round(X)` rounds each element of `X` to the nearest integer. In the case of a tie, where an element has a fractional part of exactly `0.5`, the `round` function rounds away from zero to the integer with larger magnitude.

`Y = round(X,N)` rounds to `N` digits:

- `N > 0`: round to `N` digits to the *right* of the decimal point.
- `N = 0`: round to the nearest integer.
- `N < 0`: round to `N` digits to the *left* of the decimal point.

`Y = round(X,N,type)` specifies the type of rounding. Specify `'significant'` to round to `N` significant digits (counted from the leftmost digit). In this case, `N` must be a positive integer.

`Y = round(t)` rounds each element of the `duration` array `t` to the nearest number of seconds.

`Y = round(t,unit)` rounds each element of `t` to the nearest number of the specified unit of time.

Examples

Round Matrix Elements

Round the elements of a 2-by-2 matrix to the nearest integer.

```
X = [2.11 3.5; -3.5 0.78];
Y = round(X)
```

```
Y =

     2     4
    -4     1
```

Round to Specified Number of Decimal Digits

Round `pi` to the nearest 3 decimal digits.

```
Y = round(pi,3)
```

```
Y = 3.1420
```

Round to Nearest Multiple of 100

Round the number `863178137` to the nearest multiple of 100.

```
round(863178137,-2)
```

```
ans = 863178100
```

Round Elements to Specified Number of Significant Digits

Round the elements of a vector to retain 2 significant digits.

```
format shortg
x = [1253 1.345 120.44]
```

```
x =
         1253        1.345       120.44
```

```
y = round(x,2,'significant')
```

```
y =
        1300          1.3          120
```

Controlling Number Display While Rounding

The `format` command controls how MATLAB® displays numbers at the command line. If a number has extra digits that cannot be displayed in the current format, then MATLAB automatically rounds the number for display purposes. This can lead to unexpected results when combined with the `round` function.

Consider the result of the following subtraction operation, which displays 5 digits.

```
format short
x = 112.05 - 110
```

```
x = 2.0500
```

Based on the displayed value of `x`, rounding `x` to 1 decimal should return `2.1`.

```
round(x,1)
```

```
ans = 2
```

In fact, the problem here is that MATLAB is rounding `x` to 5 digits for display purposes. The `round` function returns the correct answer. Confirm the answer by viewing `x` with `format long`, which displays `x` rounded to 15 digits.

```
format long
x
```

```
x =
   2.049999999999997
```

Round Duration Values

Round each value in a duration array to the nearest number of seconds.

```
t = hours(8) + minutes(29:31) + seconds(1.3:0.5:2.3);
```

```
t.Format = 'hh:mm:ss.SS'
```

```
t = 1×3 duration array
   08:29:01.30   08:30:01.80   08:31:02.30
```

```
Y1 = round(t)
```

```
Y1 = 1×3 duration array
   08:29:01.00   08:30:02.00   08:31:02.00
```

Round each value in t to the nearest number of hours.

```
Y2 = round(t,'hours')
```

```
Y2 = 1×3 duration array
   08:00:00.00   09:00:00.00   09:00:00.00
```

Input Arguments

X — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. For complex `X`, `round` treats the real and imaginary parts independently.

`X` must be `single` or `double` when you use `round` with more than one input.

`round` converts logical and `char` elements of `X` into `double` values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char` | `logical`
Complex Number Support: Yes

N — Number of digits

scalar integer

Number of digits, specified as a scalar integer. When you specify `N`, the `round` function rounds `X` to the nearest multiple of 10^{-N}.

If you specify the `'significant'` rounding type, then `N` must be a positive integer.

`type` — Rounding type
`'decimals'` (default) | `'significant'`

Rounding type, specified as `'decimals'` or `'significant'`. The rounding type determines whether `round` considers digits in relation to the decimal point or the overall number of significant digits. `N` must be a positive integer when you specify `'significant'`. In that case, the `round` function rounds to the nearest number with `N` significant digits.

The default value is `'decimals'`, so that `round(X,N,'decimals')` is equivalent to `round(X,N)`.

Example: `round(3132,2,'significant')` returns `3100`, which is the closest number to `3132` that has `2` significant digits.

Data Types: `char`

`t` — Input duration
`duration` array

Input duration, specified as a `duration` array.

`unit` — Unit of time
`'seconds'` (default) | `'minutes'` | `'hours'` | `'days'` | `'years'`

Unit of time, specified as `'seconds'`, `'minutes'`, `'hours'`, `'days'`, or `'years'`. A duration of 1 year is equal to exactly 365.2425 24-hour days.

Definitions

Compatibility Considerations

In R2014b, these syntaxes were added to round to any number of decimal or significant digits and to round duration values:

```
Y = round(X,N)
Y = round(X,N,type)
Y = round(t)
Y = round(t,unit)
```

Older versions support only this syntax, which rounds to the nearest integer:

```
Y = round(X)
```

Tips

- `format short` and `format long` both display rounded numbers. This can cause unexpected results when combined with the `round` function.
- For display purposes, use `sprintf` to control the exact display of a number as a string. For example, to display exactly 2 decimal digits of `pi` (and no trailing zeros), use `sprintf('%.2f',pi)`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation supports only the syntax `Y = round(X)`.

See Also

See Also

`ceil` | `fix` | `floor`

Topics

"Integers"
"Floating-Point Numbers"

Introduced before R2006a

rowfun

Apply function to table or timetable rows

Syntax

```
B = rowfun(func,A)
B = rowfun(func,A,Name,Value)
```

Description

`B = rowfun(func,A)` applies the function `func` to each row of the table or timetable `A` and returns the results in the table or timetable `B`.

`func` accepts `size(A,2)` inputs.

If `A` is a timetable and `func` aggregates data over groups of rows, then `rowfun` assigns the first row time from each group of rows in `A` as the corresponding row time in `B`. To return `B` as a table without row times, specify `'OutputFormat'` as `'table'`.

`B = rowfun(func,A,Name,Value)` applies the function `func` to each row of the table `A` with additional options specified by one or more `Name,Value` pair arguments.

For example, you can specify which variables to pass to the function `func` and how to call `func`.

Examples

Apply Function with Single Output to Rows

Apply the function `hypot` to each row of the 5-by-2 table `A` to find the shortest distance between the variables `x` and `y`.

Create a table, `A`, with two variables of numeric data.

```
x = gallery('integerdata',10,[5,1],2);
y = gallery('integerdata',10,[5,1],8);
```

```
A = table(x,y)
```

```
A = 5×2 table
    x    y
    _    __

    9     1
    4     5
    3     2
    7     3
    1    10
```

Apply the function, `hypot`, to each row of `A`. The function `hypot` takes two inputs and returns one output.

```
B = rowfun(@hypot,A,'OutputVariableNames','z')
```

```
B = 5×1 table
      z
    ______

    9.0554
    6.4031
    3.6056
    7.6158
     10.05
```

`B` is a table.

Append the function output, `B`, to the input table, `A`.

```
[A B]
```

```
ans = 5×3 table
    x    y       z
    _    __    ______

    9     1    9.0554
    4     5    6.4031
    3     2    3.6056
    7     3    7.6158
    1    10     10.05
```

Apply Function with Multiple Outputs to Rows

Define and apply a geometric Brownian motion model to a range of parameters.

Create a function in a file named `gbmSim.m` that contains the following code.

```
% Copyright 2015 The MathWorks, Inc.

function [m,mtrue,s,strue] = gbmSim(mu,sigma)
% Discrete approximation to geometric Brownian motion
%
% [m,mtrue,s,strue] = gbmSim(mu,sigma) computes the
% simulated mean, true mean, simulated standard deviation,
% and true standard deviation based on the parameters mu and sigma.
numReplicates = 1000; numSteps = 100;
y0 = 1;
t1 = 1;
dt = t1 / numSteps;
y1 = y0*prod(1 + mu*dt + sigma*sqrt(dt)*randn(numSteps,numReplicates));
m = mean(y1); s = std(y1);

% Theoretical values
mtrue = y0 * exp(mu*t1); strue = mtrue * sqrt(exp(sigma^2*t1) - 1);
end
```

`gbmSim` accepts two inputs, `mu` and `sigma`, and returns four outputs, `m`, `mtrue`, `s`, and `strue`.

Define the table, `params`, containing the parameters to input to the Brownian Motion Model.

```
mu = [-.5; -.25; 0; .25; .5];
sigma = [.1; .2; .3; .2; .1];

params = table(mu,sigma)
```

```
params =

  5×2 table
```

```
     mu       sigma
    _____    _____

     -0.5     0.1
    -0.25     0.2
        0     0.3
     0.25     0.2
      0.5     0.1
```

Apply the function, `gbmSim`, to the rows of the table, `params`.

```
stats = rowfun(@gbmSim,params,...
    'OutputVariableNames',...
    {'simulatedMean' 'trueMean' 'simulatedStd' 'trueStd'})
```

```
stats =

  5×4 table

    simulatedMean    trueMean    simulatedStd    trueStd
    _____________    ________    ____________    ________

    0.60501          0.60653     0.05808         0.060805
    0.77916           0.7788       0.161           0.15733
     1.0024                1      0.3048          0.30688
     1.2795            1.284     0.25851          0.25939
     1.6498           1.6487     0.16285          0.16529
```

The four variable names specified by the `'OutputVariableNames'` name-value pair argument indicate that `rowfun` should obtain four outputs from `gbmSim`. You can specify fewer output variable names to return fewer outputs from `gbmSim`.

Append the function output, `stats`, to the input, `params`.

```
[params stats]
```

```
ans =

  5×6 table
```

```
    mu      sigma    simulatedMean    trueMean    simulatedStd    trueStd
   _____    _____    _____________    ________    ____________    ________

    -0.5    0.1      0.60501          0.60653     0.05808         0.060805
   -0.25    0.2      0.77916           0.7788       0.161          0.15733
       0    0.3       1.0024                1      0.3048          0.30688
    0.25    0.2       1.2795            1.284     0.25851          0.25939
     0.5    0.1       1.6498           1.6487     0.16285          0.16529
```

Apply Function to Groups of Rows

Create a table, A, where g is a grouping variable.

```
g = gallery('integerdata',3,[15,1],1);
x = gallery('uniformdata',[15,1],9);
y = gallery('uniformdata',[15,1],2);

A = table(g,x,y)
```

```
A = 15×3 table
    g       x          y
    _    _______    ________

    3    0.24756     0.87516
    3     0.4358      0.3179
    3    0.97755     0.27323
    2    0.85995      0.6765
    3    0.30063    0.071171
    2    0.26589     0.19659
    3    0.13338     0.52908
    2     0.7425     0.17176
    1    0.85692     0.86996
    2    0.24286     0.24369
    3    0.19492     0.84291
    2    0.39076     0.55766
    1    0.29683     0.35681
    1    0.39031      0.2324
    2    0.18726      0.6476
```

Define the anonymous function, func, to compute the average difference between x and y.

```
func = @(x,y) mean(x-y);
```

Find the average difference between variables in groups 1, 2, and 3 defined by the grouping variable, g.

```
B = rowfun(func,A,...
    'GroupingVariable','g',...
    'OutputVariableName','MeanDiff')
```

```
B = 3×3 table
    g    GroupCount    MeanDiff
    _    __________    ________

    1    3             0.028298
    2    6             0.032569
    3    6             -0.10327
```

The variable GroupCount indicates the number of rows in A for each group.

- "Calculations on Tables"
- "Split Table Data Variables and Apply Functions"

Input Arguments

func — Function

function handle

Function, specified as a function handle. You can define the function in a file or as an anonymous function. If func corresponds to more than one function file (that is, if func represents a set of overloaded functions), MATLAB determines which function to call based on the class of the input arguments.

func can accept no more than size(A,2) inputs. By default, rowfun returns the first output of func. To return more than one output from func, use the 'NumOutputs' or 'OutputVariableNames' name-value pair arguments.

Example: func = @(x,y) x.^2+y.^2; takes two inputs and finds the sum of the squares.

A — Input table

table | timetable

Input table, specified as a table or a timetable.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'InputVariables',2` uses only the second variable in `A` as an input to `func`.

`'InputVariables'` — Specifiers for selecting variables of `A` to pass to `func`
positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector | function handle

Specifiers for selecting variables of `A` to pass to `func`, specified as the comma-separated pair consisting of `'InputVariables'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, logical vector, or a function handle.

If you specify `'InputVariables'` as a function handle, then it must return a logical scalar, and `rowfun` passes only the variables in `A` where the function returns `1` (`true`).

`'GroupingVariables'` — One or more variables in `A` that define groups of rows
positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector | categorical vector | datetime vector | duration vector

One or more variables in `A` that define groups of rows, specified as the comma-separated pair consisting of `'GroupingVariables'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, logical vector, categorical vector, datetime vector, or duration vector.

Rows in `A` that have the same grouping variable values belong to the same group. `rowfun` applies `func` to each group of rows, rather than separately to each row of `A`. The output, `B`, contains one row for each group.

Row labels can be grouping variables. You can group on row labels alone, on one or more variables in `A`, or on row labels and variables together.

- If `A` is a table, then the labels are row names.
- If `A` is a timetable, then the labels are row times.

`'SeparateInputs'` — Indicator for calling `func` with separate inputs
`true` (default) | `false` | `1` | `0`

Indicator for calling `func` with separate inputs, specified as the comma-separated pair consisting of `'SeparateInputs'` and either `true`, `false`, `1`, or `0`.

`true`	`func` expects separate inputs. `rowfun` calls `func` with `size(A,2)` inputs, one argument for each data variable. This is the default behavior.
`false`	`func` expects one vector containing all inputs. `rowfun` creates the input vector to `func` by concatenating the values in each row of `A`.

`'ExtractCellContents'` — Indicator to pass values from cell variables to `func`
`false` (default) | `true` | `0` | `1`

Indicator to pass values from cell variables to `func`, specified as the comma-separated pair consisting of `'ExtractCellContents'` and either `false`, `true`, `0`, or `1`.

`true`	`rowfun` extracts the contents of a variable in `A` whose data type is `cell` and passes the values, rather than the cells, to `func` For grouped computation, the values within each group in a cell variable must allow vertical concatenation.
`false`	`rowfun` passes the cells of a variable in `A` whose data type is `cell` to `func`. This is the default behavior.

`'OutputVariableNames'` — Variable names for outputs of `func`
character vector | cell array of character vectors

Variable names for outputs of `func`, specified as the comma-separated pair consisting of `'OutputVariableNames'` and a character vector or a cell array of character vectors that are nonempty and distinct. The number of character vectors must equal the number of outputs desired from `func`.

Furthermore, the variable names must be valid MATLAB identifiers. If valid MATLAB identifiers are not available for use as variable names, MATLAB uses a cell array of *N* character vectors of the form `{'Var1' ... 'VarN'}` where *N* is the number of variables. You can determine valid MATLAB variable names using the function `isvarname`.

'NumOutputs' — Number of outputs from func

0 | positive integer

Number of outputs from func, specified as the comma-separated pair consisting of 'NumOutputs' and 0 or a positive integer. The integer must be less than or equal to the possible number of outputs from func.

Example: 'NumOutputs',2 causes rowfun to call func with two outputs.

'OutputFormat' — Format of B

'table' (default) | 'timetable' | 'uniform' | 'cell'

Format of B, specified as the comma-separated pair consisting of 'OutputFormat' and either the value 'table', 'uniform', or 'cell'.

'table'	rowfun returns a table with one variable for each output of func. For grouped computation, B, also contains the grouping variables. 'table' allows you to use a function that returns values of different sizes or data types. However, for ungrouped computation, all of the outputs from func must have one row each time it is called. For grouped computation, all of the outputs from func must have the same number of rows. This is the default output format.
'timetable'	rowfun returns a timetable with one variable for each variable in A (or each variable specified with 'InputVariables'). For grouped computation, B also contains the grouping variables. rowfun creates the row times of B from the row times of A. If the row times assigned to B do not make sense in the context of the calculations performed using func, then specify the output format as 'OutputFormat','table'. If A is a timetable, then this is the default output format.
'uniform'	rowfun concatenates the values returned by func into a vector. All of the outputs from func must be scalars with the same data type.
'cell'	rowfun returns B as a cell array. 'cell' allows you to use a function that returns values of different sizes or data types.

`'ErrorHandler'` — Function to call if `func` fails

function handle

Function to call if `func` fails, specified as the comma-separated pair consisting of `'ErrorHandler'` and a function handle. Define this function so that it rethrows the error or returns valid outputs for function `func`.

MATLAB calls the specified error-handling function with two input arguments:

- A structure with these fields:

`identifier`	Error identifier.
`message`	Error message text.
`index`	Row or group index at which the error occurred.

- The set of input arguments to function `func` at the time of the error.

For example,

```
function [A, B] = errorFunc(S, varargin)
warning(S.identifier, S.message);
A = NaN; B = NaN;
```

Output Arguments

`B` — Output table

table | timetable

Output table, returned as a table or a timetable. `B` can store metadata such as descriptions, variable units, variable names, and row names. For more information, see Table Properties or Timetable Properties.

See Also

See Also

`arrayfun` | `cellfun` | `findgroups` | `isvarname` | `splitapply` | `structfun` | `varfun`

Topics

"Calculations on Tables"
"Split Table Data Variables and Apply Functions"
"Anonymous Functions"

Introduced in R2013b

rref

Reduced row echelon form (Gauss-Jordan elimination)

Syntax

```
R = rref(A)
[R,jb] = rref(A)
[R,jb] = rref(A,tol)
```

Description

`R = rref(A)` produces the reduced row echelon form of `A` using Gauss Jordan elimination with partial pivoting. A default tolerance of (`max(size(A))*eps *norm(A,inf)`) tests for negligible column elements.

`[R,jb] = rref(A)` also returns a vector `jb` such that:

- `r = length(jb)` is this algorithm's idea of the rank of `A`.
- `x(jb)` are the pivot variables in a linear system `Ax = b`.
- `A(:,jb)` is a basis for the range of `A`.
- `R(1:r,jb)` is the `r`-by-`r` identity matrix.

`[R,jb] = rref(A,tol)` uses the given tolerance in the rank tests.

Roundoff errors may cause this algorithm to compute a different value for the rank than `rank`, `orth` and `null`. Additionally, use `mldivide` to solve linear systems when high precision is required.

Examples

Use `rref` on a rank-deficient magic square:

```
A = magic(4), R = rref(A)
```

```
A =
```

```
    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1

R =
     1     0     0     1
     0     1     0     3
     0     0     1    -3
     0     0     0     0
```

See Also

inv | lu | rank

Introduced before R2006a

rsf2csf

Convert real Schur form to complex Schur form

Syntax

```
[U,T] = rsf2csf(U,T)
```

Description

The *complex Schur form* of a matrix is upper triangular with the eigenvalues of the matrix on the diagonal. The *real Schur form* has the real eigenvalues on the diagonal and the complex eigenvalues in 2-by-2 blocks on the diagonal.

`[U,T] = rsf2csf(U,T)` converts the real Schur form to the complex form.

Arguments `U` and `T` represent the unitary and Schur forms of a matrix `A`, respectively, that satisfy the relationships: `A = U*T*U'` and `U'*U = eye(size(A))`. See `schur` for details.

Examples

Given matrix `A`,

```
 1     1     1     3
 1     2     1     1
 1     1     3     1
-2     1     1     4
```

with the eigenvalues

```
4.8121    1.9202 + 1.4742i    1.9202 + 1.4742i    1.3474
```

Generating the Schur form of `A` and converting to the complex Schur form

```
[u,t] = schur(A);
[U,T] = rsf2csf(u,t)
```

yields a triangular matrix T whose diagonal (underlined here for readability) consists of the eigenvalues of A.

```
U =

-0.4916       -0.2756 - 0.4411i    0.2133 + 0.5699i   -0.3428
-0.4980       -0.1012 + 0.2163i   -0.1046 + 0.2093i    0.8001
-0.6751        0.1842 + 0.3860i   -0.1867 - 0.3808i   -0.4260
-0.2337        0.2635 - 0.6481i    0.3134 - 0.5448i    0.2466

T =

4.8121        -0.9697 + 1.0778i   -0.5212 + 2.0051i   -1.0067
     0         1.9202 + 1.4742i    2.3355              0.1117 + 1.6547i
     0              0              1.9202 - 1.4742i    0.8002 + 0.2310i
     0              0                   0              1.3474
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`schur`

Introduced before R2006a

rtickangle

Rotate *r*-axis tick labels

Syntax

```
rtickangle(angle)
rtickangle(ax,angle)

ang = rtickangle
ang = rtickangle(pax)
```

Description

`rtickangle(angle)` rotates the *r*-axis tick labels for the current axes to the specified angle in degrees, where `0` is horizontal. Specify a positive value for counterclockwise rotation or a negative value for clockwise rotation.

`rtickangle(ax,angle)` rotates the tick labels for the axes specified by `ax` instead of the current axes.

`ang = rtickangle` returns the rotation angle for the *r*-axis tick labels of the current axes as a scalar value in degrees. Positive values indicate counterclockwise rotation. Negative values indicate clockwise rotation.

`ang = rtickangle(pax)` uses the polar axes specified by `pax` instead of the current axes.

Examples

Rotate r-Axis Tick Labels

Create a polar plot and rotate the *r*-axis tick labels 45 degrees counterclockwise.

```
polarplot(1:100)
rtickangle(45)
```

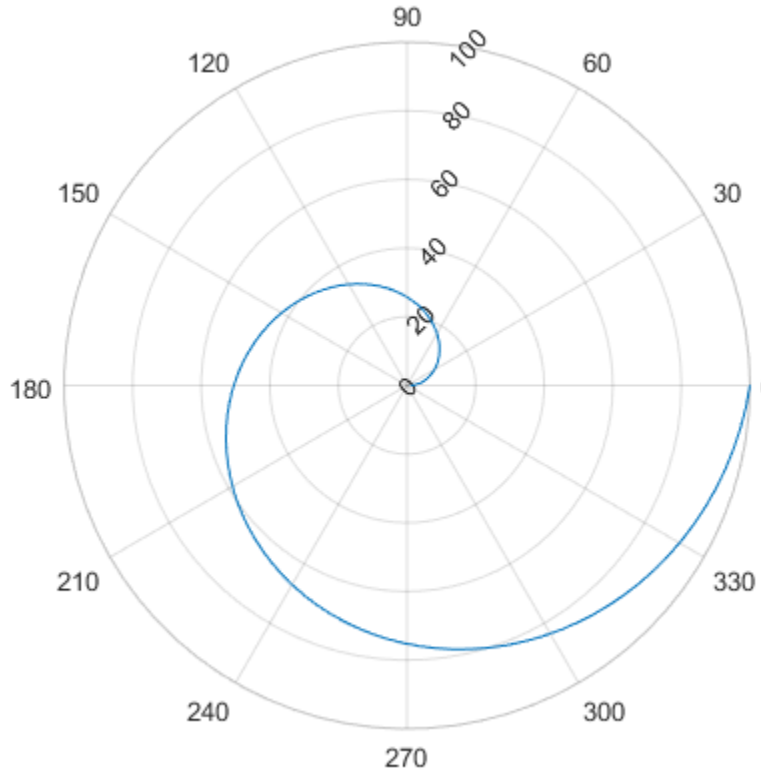

Rotate r-Axis Tick Labels for Specific Polar Axes

Create a polar plot and assign the polar axes object to the variable `pax`. Then, rotate the *r*-axis tick labels for the polar axes. Ensure that `rtickangle` affects `pax` by specifying the polar axes object as the first input argument.

```
polarplot(1:100)
pax = gca;
rtickangle(pax,45)
```

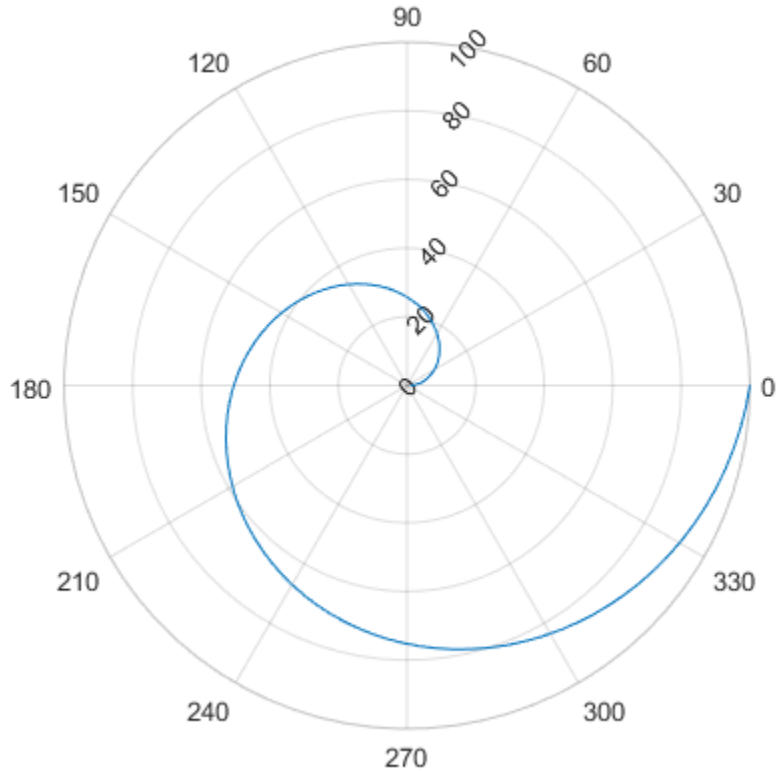

Query Current Angle for r-Axis Tick Labels

Create a polar plot. Then, query the rotation angle for the *r*-axis tick labels. By default, the labels are not rotated.

```
polarplot(1:100)
```

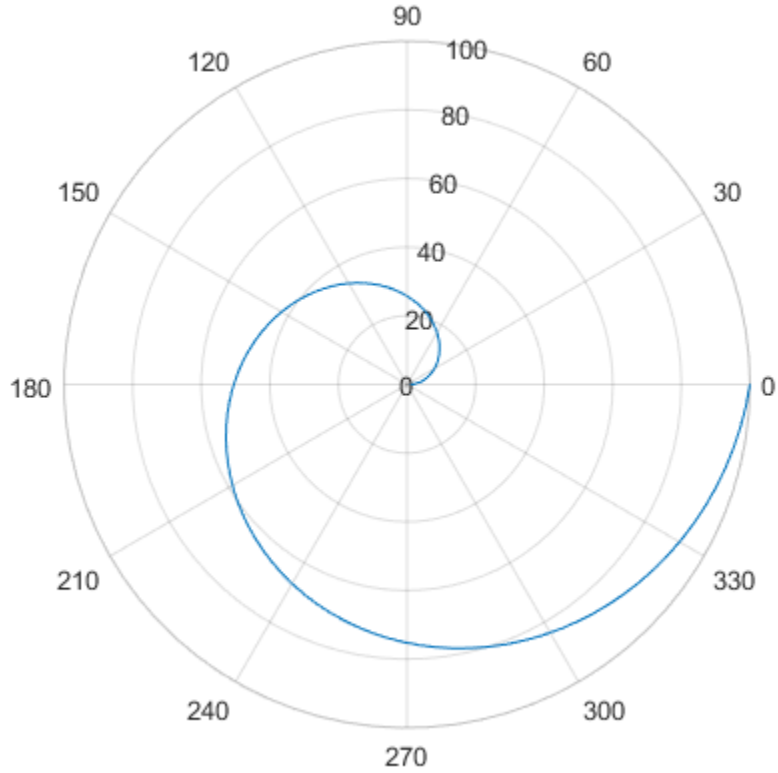


```
ang = rtickangle
```

```
ang =

     0
```

Input Arguments

`angle` — Rotation of tick labels
0 (default) | scalar value in degrees

Rotation of tick labels, specified as a scalar value in degrees, where 0 is horizontal.

Example: `rtickangle(90)`

`pax` — One or more polar axes
current axes (default) | single object | vector of objects

One or more polar axes, specified as a single object or a vector of objects. If you do not specify the polar axes, then `rtickangle` uses the current axes.

Algorithms

The `rtickangle` function sets and queries the RTickLabelRotation property of the axes object.

See Also

See Also

Functions
`rlim` | `rtickformat` | `rticklabels` | `rticks` | `thetalim`

Properties
PolarAxes Properties

Introduced in R2016b

rtickformat

Specify *r*-axis tick label format

Syntax

```
rtickformat(fmt)
rtickformat(pax, ___ )
```

```
rfmt = rtickformat
rfmt = rtickformat(pax)
```

Description

`rtickformat(fmt)` sets the format for the *r*-axis tick labels. For example, specify `fmt` as `'usd'` to display the labels in U.S. dollars.

`rtickformat(pax, ___ )` uses the axes specified by `pax` instead of the current axes. Specify `ax` as the first input argument.

`rfmt = rtickformat` returns the format style used for *r*-axis tick labels of the current axes. Depending on the type of labels along the *r*-axis, `rfmt` is a character vector of a numeric format.

`rfmt = rtickformat(pax)` returns the format style used for the axes specified by `pax` instead of the current axes.

Examples

Display *r*-Axis Tick Labels as Percentages

Create a polar plot. Display the tick labels along the *r*-axis as percentages.

```
th = linspace(0,2*pi,10);
r = [11 49 95 68 74 75 88 76 65 67];
polarplot(th,r,'o')
rtickformat('percentage')
```

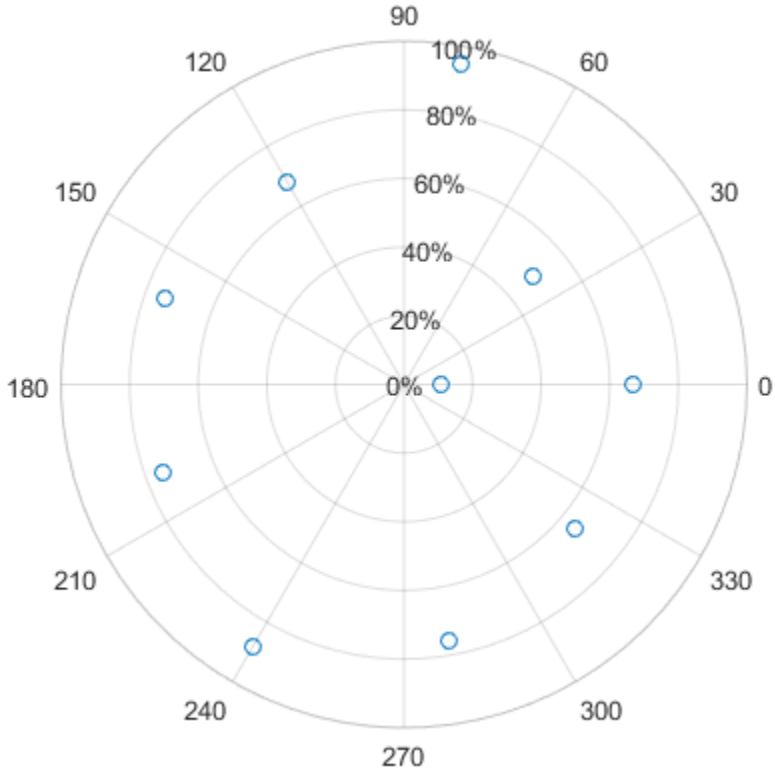

Display Text After Each *r*-Axis Tick Label

Display the tick labels along the *r*-axis with the text "cm" after each value.

```
polarplot(1:10)
rtickformat('%g cm')
```

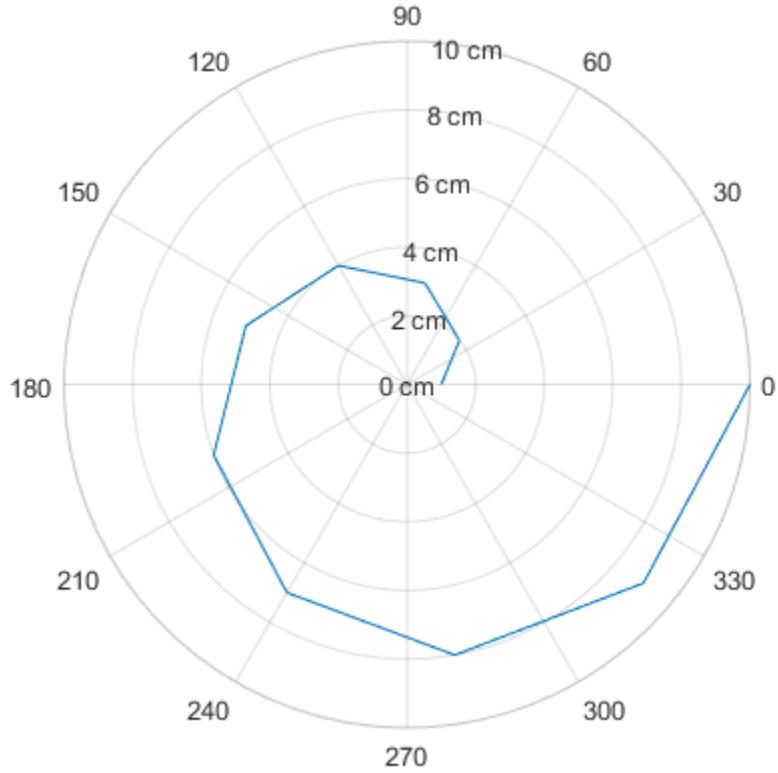

Control Number of Decimals for *r*-Axis Tick Labels

Display the *r*-axis tick labels with two decimal places. Control the decimal places by passing `rtickformat` a character vector of a numeric format that uses fixed-point notation for the conversion character and a precision value of 2.

```
theta = 0:0.01:2*pi;
rho = 50*sin(2*theta);
polarplot(theta,rho)
rtickformat('%.2f')
```

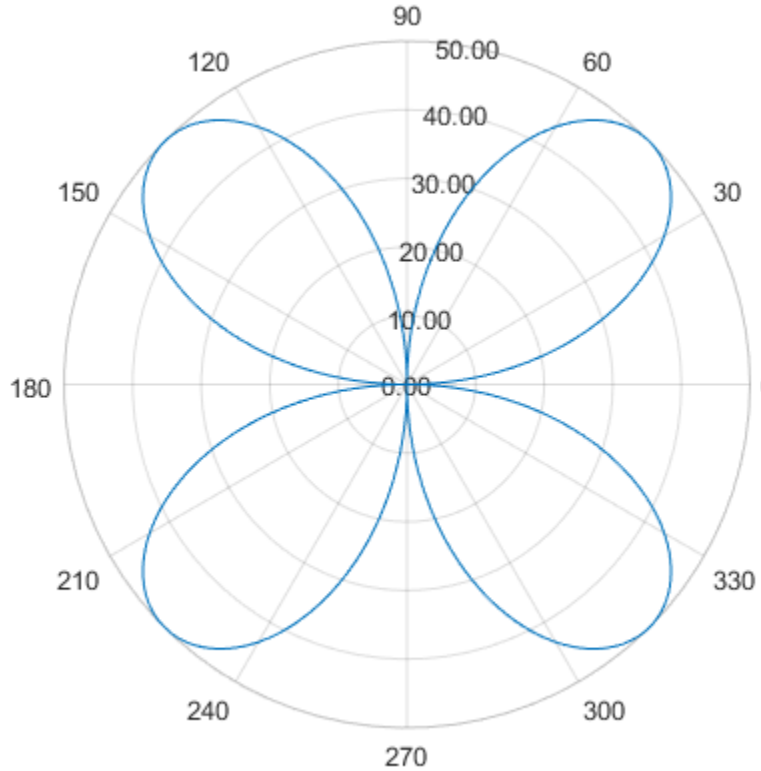

Specify *r*-Axis Tick Label Format for Specific Polar Axes

Create a polar plot and assign the polar axes object to the variable `pax`. Ensure that `rtickformat` affects the polar axes you just created by passing `pax` as the first input argument to the function.

```
polarplot(1:10)
pax = gca;
rtickformat(pax,'percentage')
```

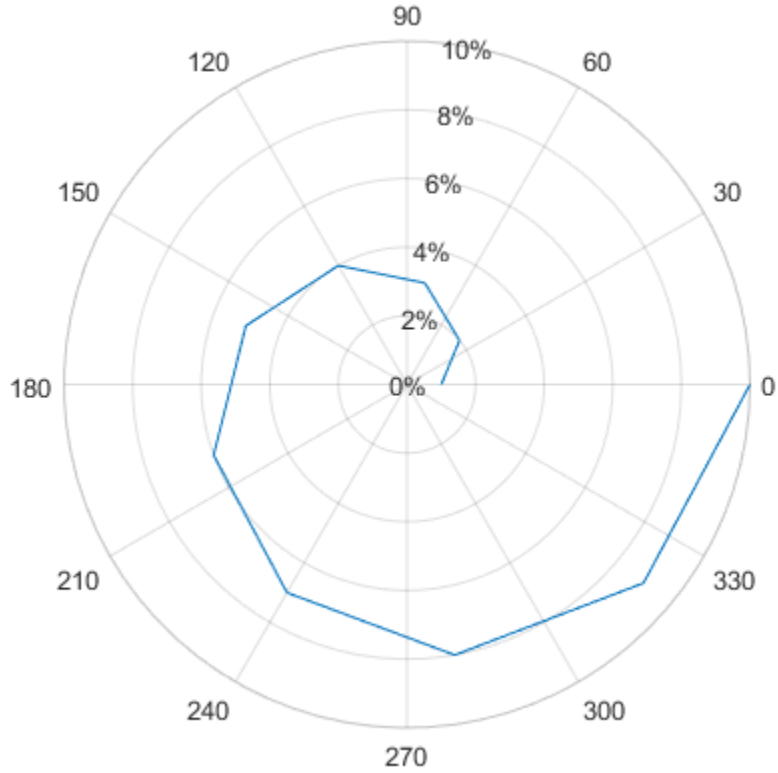

Input Arguments

`fmt` — Format for numeric tick labels

`'%g'` (default) | predefined format | character vector

Format for numeric tick labels, specified as one of the predefined formats listed in this table or a character vector of a custom numeric format.

Predefined Format	Description
`'usd'`	U.S. dollars. This option is equivalent using `'$%,.2f'`. If the labels use scientific

Predefined Format	Description
	notation, this option sets the exponent value to 0.
`'eur'`	Euro. This option is equivalent to using `'\x20AC%,.2f'` with an exponent value of 0.
`'gbp'`	British pound. This option is equivalent to using `'\x00A3%,.2f'` with an exponent value of 0.
`'jpy'`	Japanese yen. This option is equivalent to using `'\x00A5%,d'` with an exponent value of 0.
`'degrees'`	Display degree symbol after values. This option is equivalent to using `'%g\x00B0'` with the default exponent value.
`'percentage'`	Display percent sign after values. This option is equivalent to using `'%g%%'` with the default exponent value.
`'auto'`	Default format of `'%g'` with the default exponent value.

Example: `rtickformat('usd')`

Character Vector of Numeric Format

You can specify a custom numeric format by creating a character vector of identifiers.

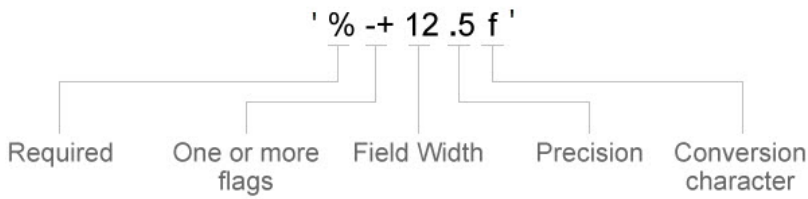

Identifiers are optional, except the percent sign and conversion character. Construct the format in this order:

- One or more flags — Options such as adding a plus sign before positive values. For a full list of options, see the table of Optional Flags.
- Field width — Minimum number of characters to print in the tick label. Specify the field width as an integer value. If the number of significant digits in the tick value is smaller than the field width, then the label is padded with spaces.
- Precision — Number of digits to the right of the decimal point or the number of significant digits, depending on the conversion character. Specify the precision as an integer value.
- Conversion character — Value type. For a full list of options, see the table of Conversion Characters. If you specify a conversion that does not fit the data, then MATLAB overrides the specified conversion, and uses `%e`.

Also, you can specify literal text at the beginning or end of the format. To print a single quotation mark, use `''`. To print a percent character, use `%%`.

Example: `rtickformat('%.2f')` displays the values using fixed-point notation with two decimal places.

Example: `rtickformat('$%.2f')` displays a dollar sign before each value.

Example: `rtickformat('%.2f million')` displays `million` after each value.

Optional Flags

Identifier	Description	Example of Numeric Format
`,`	Display commas every three digits, such as `'1,000'`.	`'%,4.4g'`
`+`	Print the sign character (+) for positive values, such as `'+100'`.	`'%+4.4g'`
`0`	Pad the field width with leading zeros instead of spaces, such as `'0100'`.	`'%04.4g'`
`–`	Left-justify, which pads the end of the value with spaces instead of the beginning. For example, if the field width is `4`, then this flag	`'%-4.4g'`

Identifier	Description	Example of Numeric Format
	formats the label as `'100 '` instead of `' 100'`.	
`#`	For the `%f`, `%e`, and `%g` conversion characters, print the decimal point even when the precision is 0, such as `'100.'`. For `%g`, do not remove trailing zeros.	`'%#4.4g'`

Conversion Characters

Identifier	Description	Example
`d` or `i`	Signed integer with base 10. The precision value indicates the number of significant digits.	`'%.4d'` displays π as `0003`.
`f`	Fixed-point notation. The precision value indicates the number of decimal places.	`'%.4f'` displays π as `3.1416`.
`e`	Exponential notation. The precision value indicates the number of decimal places.	`'%.4e'` displays π as 3.1416×10^0.
`g`	The more compact version of `e` or `f`, with no trailing zeros. The precision value indicates the maximum number of decimal places.	`'%.4g'` displays π as `3.1416`.

`pax` — One or more polar axes

current axes (default) | single object | vector of objects

One or more polar axes, specified as a single object or a vector of objects. If you do not specify a polar axes object, then `rtickformat` uses the current axes.

Algorithms

The `rtickformat` function sets and queries the `TickLabelFormat` property of the ruler object associated with the *r*-axis.

See Also

See Also

`rlim` | `rtickangle` | `rticklabels` | `rticks` | `thetatickformat`

Introduced in R2016b

rticklabels

Set or query *r*-axis tick labels

Syntax

```
rticklabels(labels)
rl = rticklabels

rticklabels('auto')
rticklabels('manual')
m = rticklabels('mode')

___ = rticklabels(pax, ___ )
```

Description

`rticklabels(labels)` sets the *r*-axis tick labels for the current axes. Specify `labels` as a cell array of character vectors; for example, `{'January','February','March'}`. If you specify the labels, then the *r*-axis tick values and tick labels no longer update automatically based on changes to the axes.

`rl = rticklabels` returns the *r*-axis tick labels for the current axes.

`rticklabels('auto')` sets an automatic mode, enabling the axes to determine the *r*-axis tick labels. Use this option if you set the labels and then want to set them back to the default values.

`rticklabels('manual')` sets a manual mode, freezing the *r*-axis tick labels at the current values.

`m = rticklabels('mode')` returns the current value of the *r*-axis tick labels mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify the tick labels or set the mode to manual.

`___ = rticklabels(pax, ___ )` uses the axes specified by `pax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes.

Examples

Specify *r*-Axis Tick Values and Labels

Create a polar plot. Display tick marks and grid lines along the *r*-axis at the values 0.1, 0.3, and 0.5. Then, specify a label for each tick mark.

```
theta = linspace(0,2*pi);
rho = theta/10;
polarplot(theta,rho)
rticks([0.1 0.25 0.5])
rticklabels({'r = .1','r = .3','r = .5'})
```

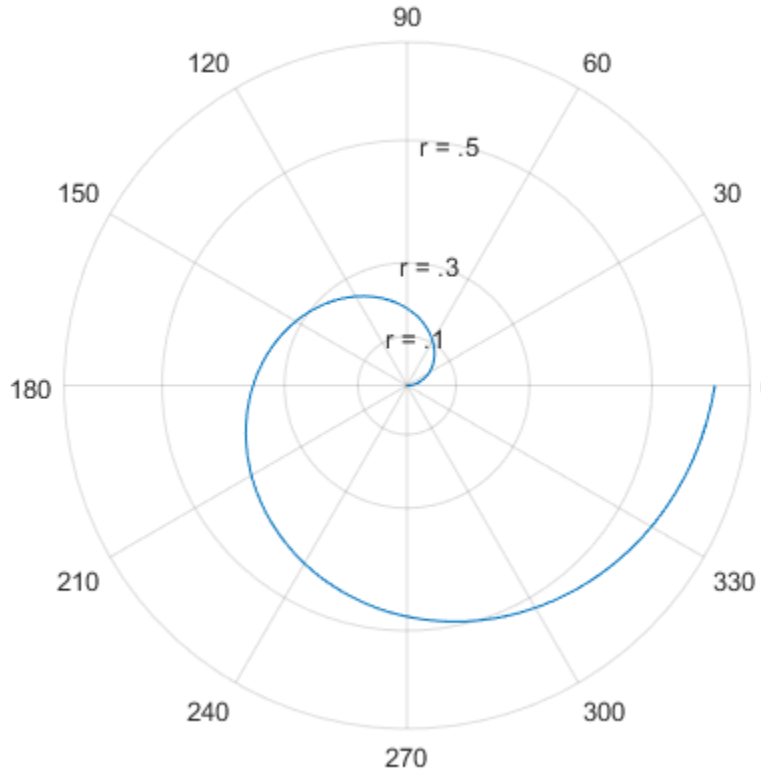

Specify r-Axis Tick Labels for Specific Polar Axes

Create a polar plot and assign the polar axes object to the variable `pax`. Ensure that `rticks` and `rticklabels` affect the polar axes you just created by specifying `pax` as the first input argument to the functions.

```
theta = 0:0.01:2*pi;
rho = 50*sin(2*theta);
polarplot(theta,rho)
pax = gca;

rticks(pax,[10 25 50])
rticklabels(pax,{'r = 10','r = 25','r = 50'})
```

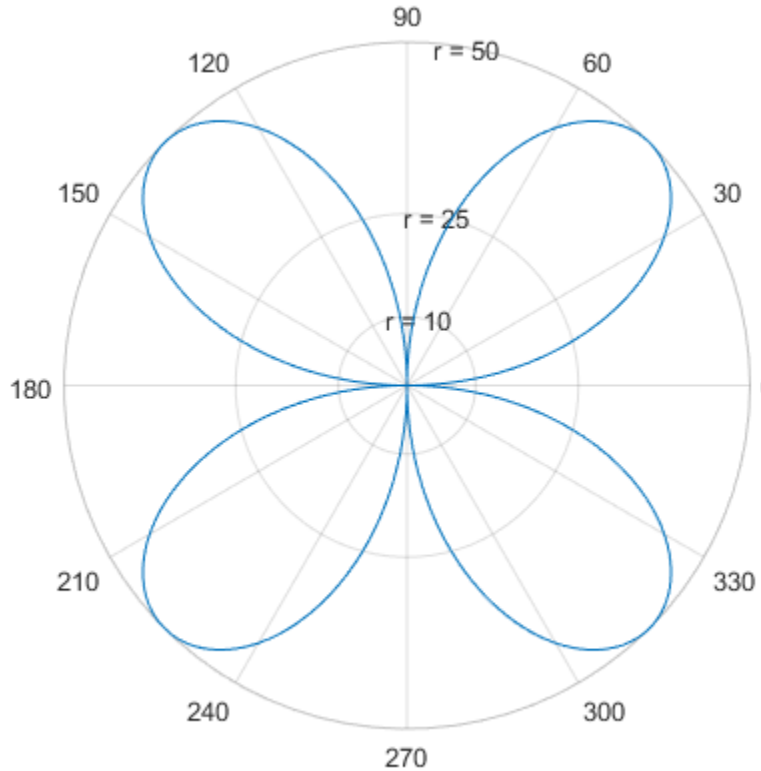

Set r-Axis Tick Labels Back to Default Labels

Create a polar plot and specify the *r*-axis tick values and corresponding labels. Then, set the *r*-axis tick values and labels back to the default values.

```
theta = linspace(0,2*pi);
rho = theta/10;
polarplot(theta,rho)
rticks([0.1 0.25 0.5])
rticklabels({'r = .1','r = .3','r = .5'})
```

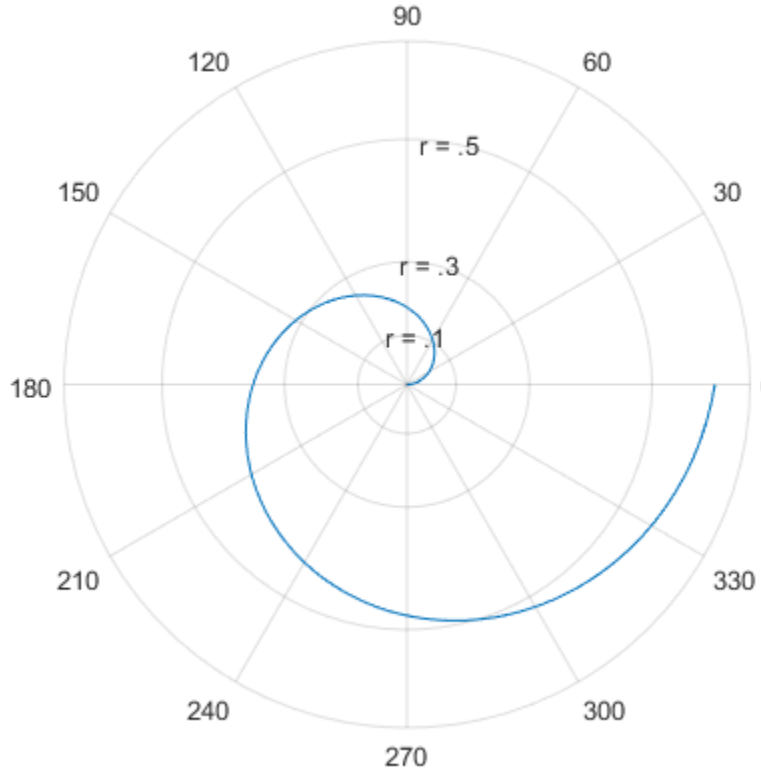


```
rticks('auto')
rticklabels('auto')
```

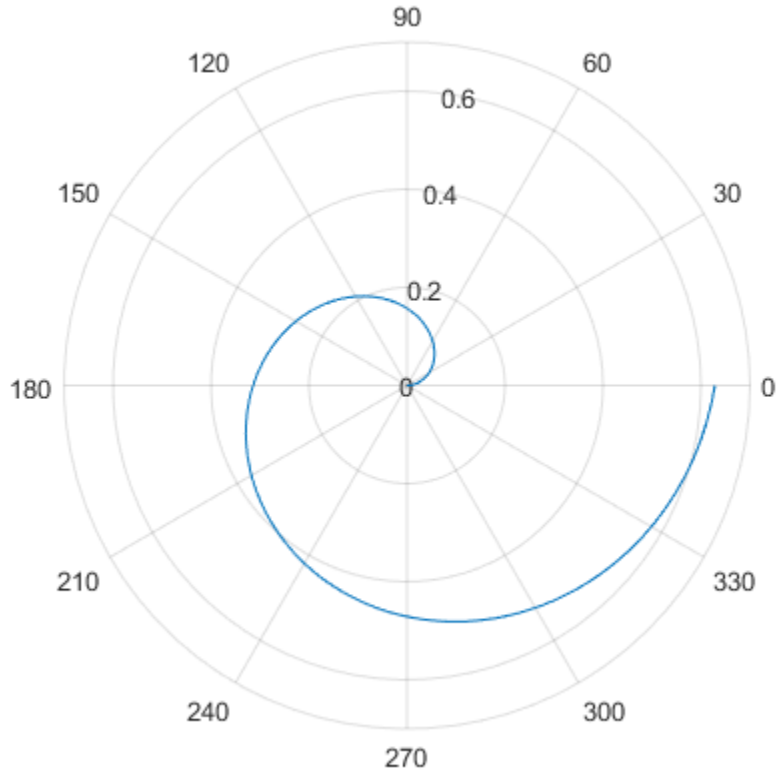

Remove r-Axis Tick Labels

Remove the tick labels along the *r*-axis by specifying the tick labels as an empty array.

```
theta = 0:0.01:2*pi;
rho = 50*sin(2*theta);
polarplot(theta,rho)
rticklabels({})
```

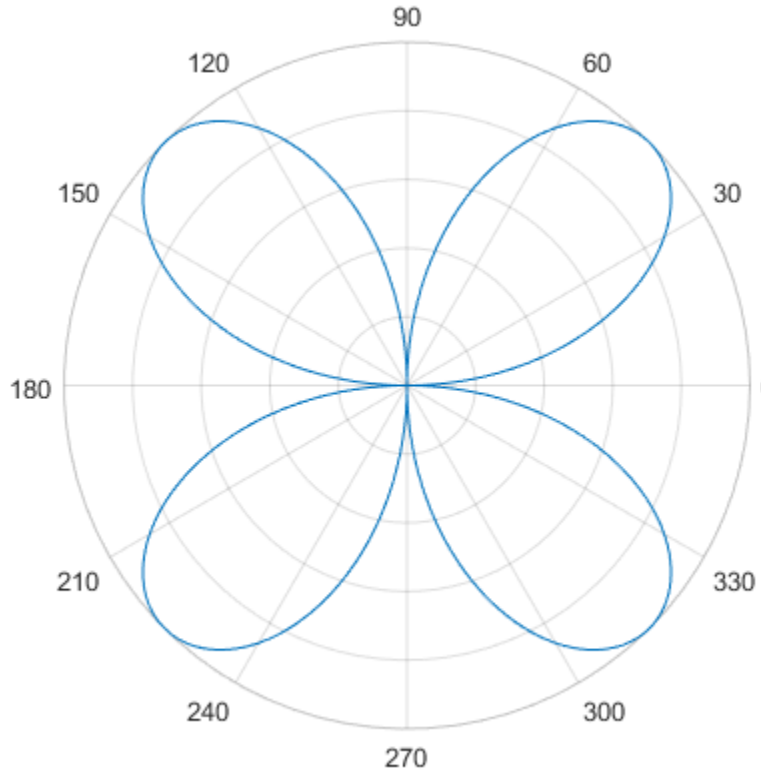

Input Arguments

`labels` — Tick labels

cell array of character vectors

Tick labels, specified as a cell array of character vectors. If you do not want tick labels to show, then specify an empty cell array `{}`. Tick labels support TeX and LaTeX markup. See the TickLabelInterpreter property of the axes object for more information.

Example: `rticklabels({'0','\pi','2\pi'})`

Example: `rticklabels({'January','Febrary','March'})`

Example: `rticklabels({})`

Note: To specify the tick values, use the `rticks` function.

`pax` — One or more polar axes

current axes (default) | single object | vector of objects

One or more polar axes, specified as a single object or a vector of objects. If you do not specify the polar axes, then `rticklabels` uses the current axes.

Output Arguments

`rl` — Current tick labels

cell array of character vectors | character matrix

Current tick labels, returned as a cell array of character vectors or a character matrix.

`m` — Current tick labels mode

`'auto'` | `'manual'`

Current tick labels mode, returned as one of these values:

- `'auto'` — Axes automatically determines the *r*-axis tick labels.
- `'manual'` — Axes uses manually specified *r*-axis tick labels.

Definitions

Tick Labels

The tick labels are the labels that you see next to each tick mark. The tick values are the locations along the *r*-axis where the tick marks appear. Set the tick values using the `rticks` function. Set the corresponding tick labels using the `rticklabels` function.

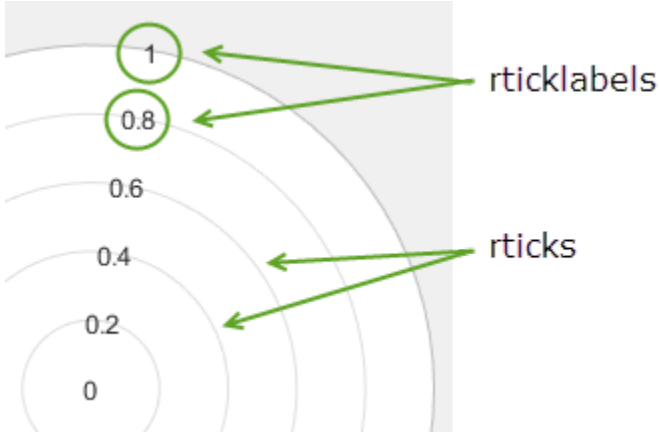

Algorithms

The `rticklabels` function sets and queries several polar axes properties related to the *r*-axis tick labels.

- RTickLabel — Property that stores the text for the *r*-axis tick labels.
- RTickLabelMode — Property that stores the *r*-axis tick label mode. When you set the *r*-axis tick labels using `rticklabels`, this property changes to `'manual'`.
- RTickMode — Property that stores the *r*-axis tick value mode. When you set the *r*-axis tick labels using `rticklabels`, this property changes to `'manual'`.

See Also

See Also

Functions
`rlim` | `rtickangle` | `rtickformat` | `rticks` | `thetaticklabels`

Properties
PolarAxes Properties

Introduced in R2016b

rticks

Set or query *r*-axis tick values

Syntax

```
rticks(ticks)
rt = rticks

rticks('auto')
rticks('manual')
m = rticks('mode')

___ = rticks(pax, ___ )
```

Description

`rticks(ticks)` sets the *r*-axis tick values, which are the locations along the *r*-axis where the tick marks and grid lines appear. Specify `ticks` as a vector of increasing values; for example, `[0 2 4 6]`. This command affects the current axes.

`rt = rticks` returns the current *r*-axis tick values as a vector.

`rticks('auto')` sets an automatic mode, enabling the axes to determine the *r*-axis tick values. Use this option if you change the tick values and then want to set them back to the default values.

`rticks('manual')` sets a manual mode, freezing the *r*-axis tick values at the current values. Use this option if you want to retain the current tick values when resizing the axes or adding new data to the axes.

`m = rticks('mode')` returns the current *r*-axis tick labels mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify tick values or change the mode to manual.

`___ = rticks(pax, ___ )` uses the axes object `pax` instead of the current axes. Specify `pax` as the first input argument for any of the previous syntaxes.

Examples

Specify *r*-Axis Tick Values and Labels

Create a polar plot. Display tick marks and grid lines along the *r*-axis at the values 0.1, 0.3, and 0.5. Then, specify a label for each tick mark.

```
theta = linspace(0,2*pi);
rho = theta/10;
polarplot(theta,rho)
rticks([0.1 0.25 0.5])
rticklabels({'r = .1','r = .3','r = .5'})
```

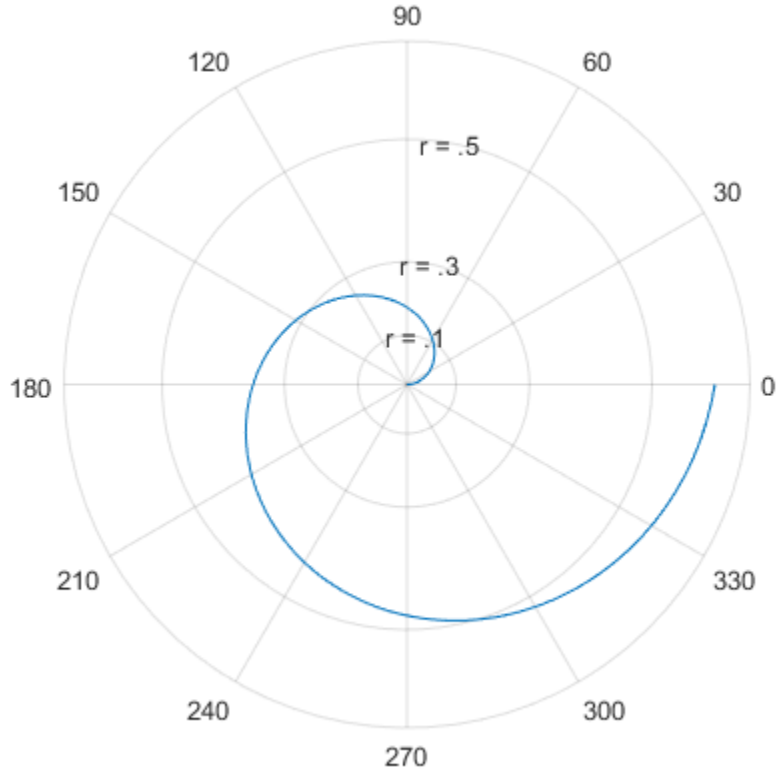

Specify Nonuniform *r*-Axis Tick Values

Display tick marks and grid lines along the *r*-axis at nonuniform values between 0 and 10. MATLAB® labels the tick marks with the numeric values.

```
theta = 0:0.01:2*pi;
rho = 10*sin(2*theta);
polarplot(theta,rho)
rticks([0 4 5 6 10])
```

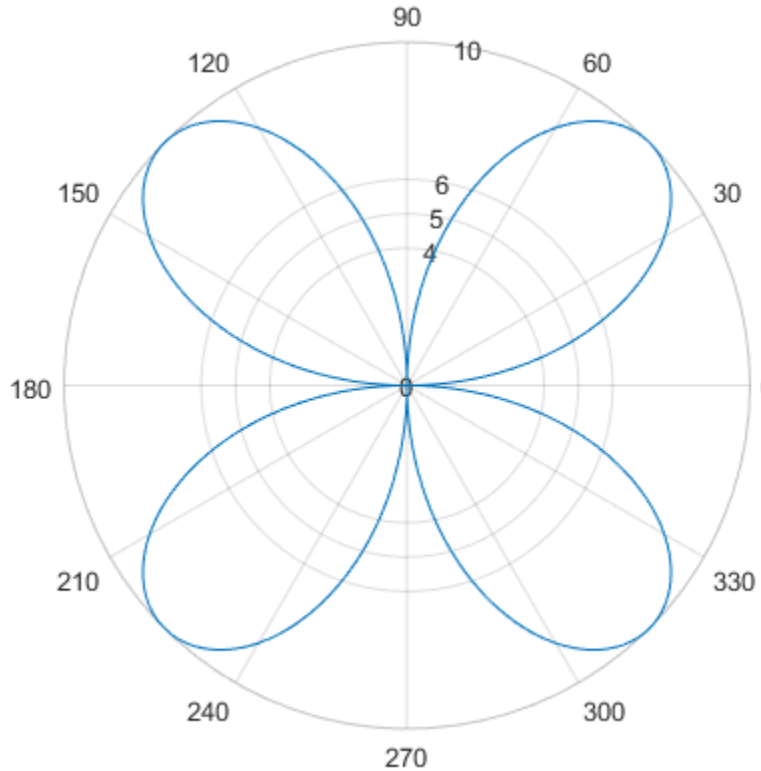

Increment *r*-Axis Tick Values by 10

Display tick marks and grid lines along the *r*-axis at increments of 10, starting from 0 and ending at 50.

```
theta = 0:0.01:2*pi;
rho = 50*sin(2*theta);
polarplot(theta,rho)
rticks(0:10:50)
```

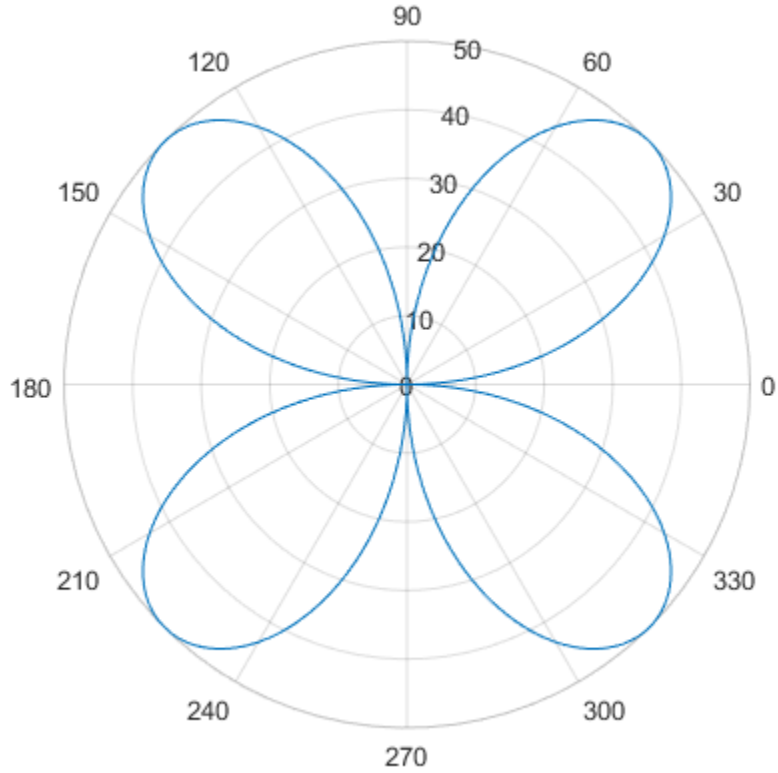

Set *r*-Axis Tick Values Back to Default Values

Create a polar plot and specify the *r*-axis tick values. Then, set the *r*-axis tick values back to the default values.

```
polarplot(1:10)
rticks([0 5 10])
```

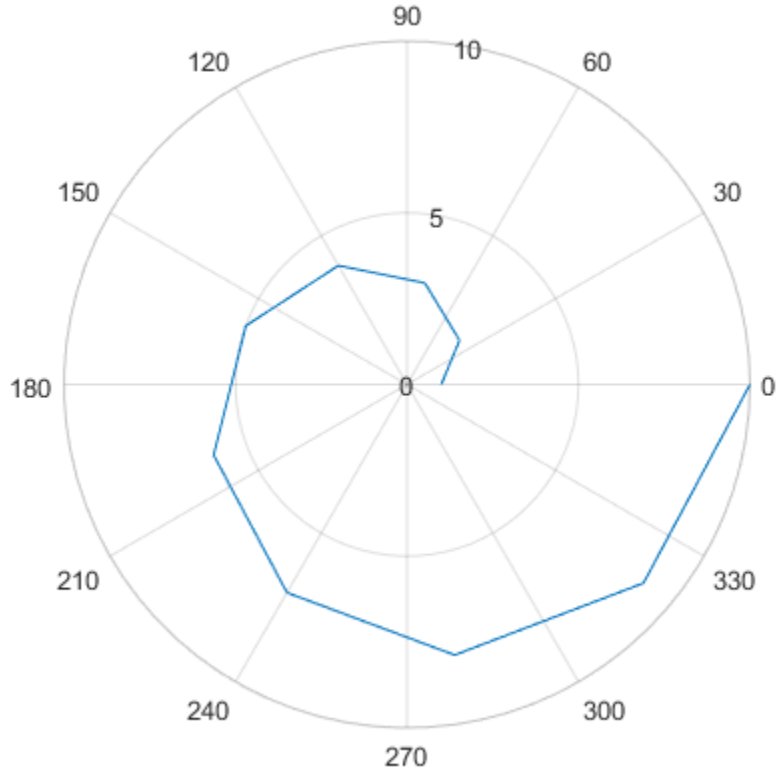


```
rticks('auto')
```

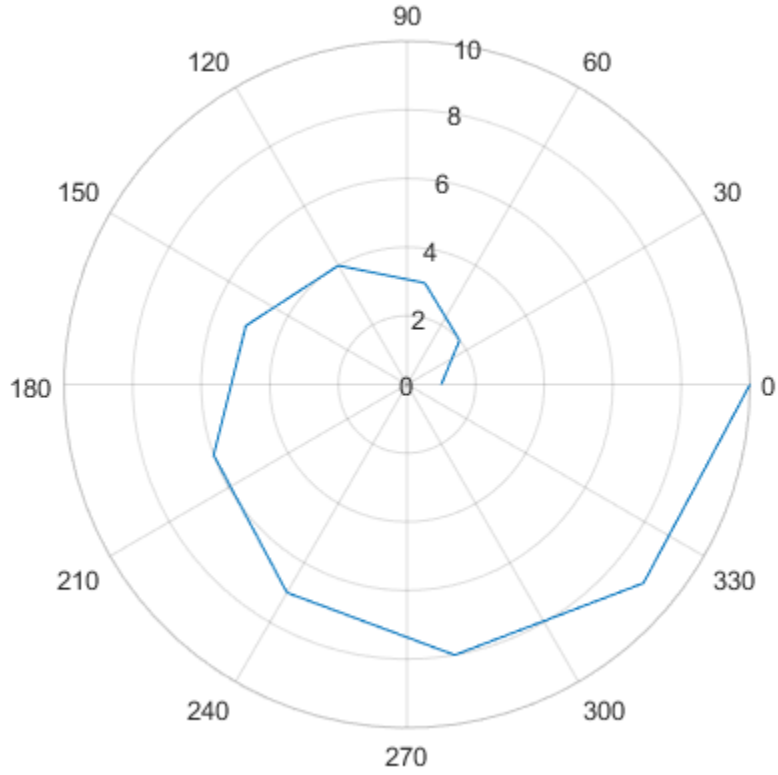

Specify *r*-Axis Tick Values for Specific Polar Axes

Create polar axes and return the polar axes object `pax`. Ensure that `rticks` affects the polar axes you just created by passing `pax` as the first input argument to the function.

```
pax = polaraxes;
rticks(pax,[0 .5 1])
```

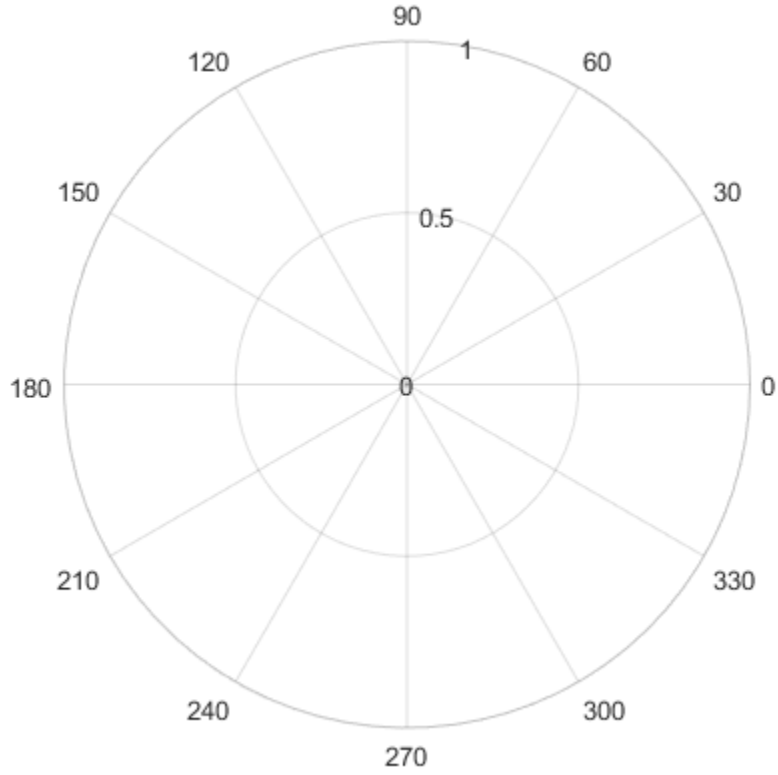

Remove *r*-Axis Tick Marks and Grid Lines

Remove the tick marks and grid lines along the *r*-axis by specifying the tick values as an empty array.

```
polarplot(1:100)
rticks([])
```

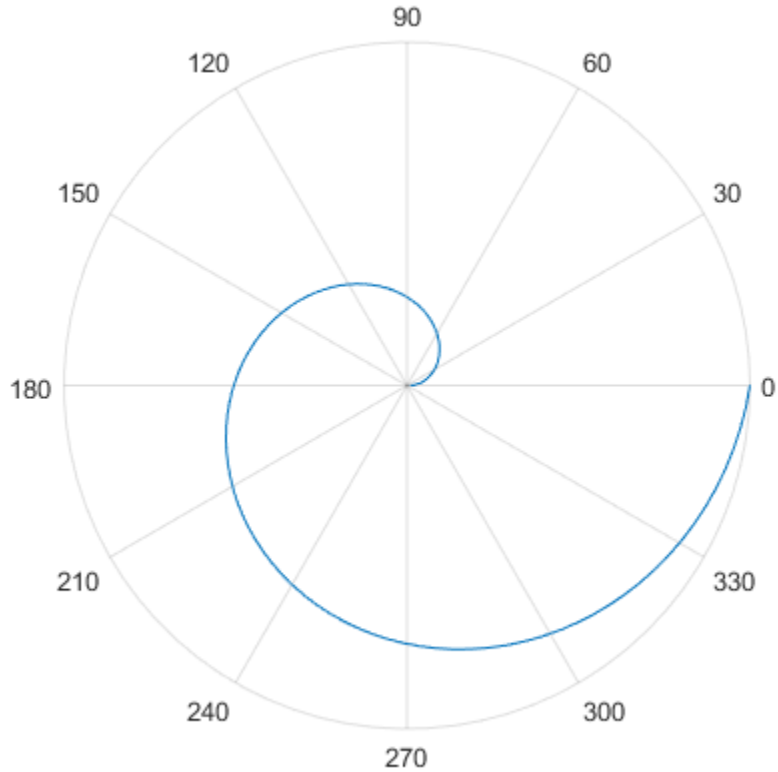

Input Arguments

`ticks` — Tick values
vector of increasing values

Tick values, specified as a vector of increasing values. If you do not want tick marks along the *r*-axis, specify an empty vector `[]`.

Example: `rticks([0 1 2 3 4])`

Example: `rticks(0:10:100)`

Example: `rticks([])`

Note: To specify the tick labels, use the `rticklabels` function.

`pax` — One or more polar axes

current axes (default) | single object | vector of objects

One or more polar axes, specified as a single object or a vector of objects. If you do not specify the polar axes, then `rticks` uses the current axes.

Output Arguments

`rt` — Current tick values

vector

Current tick values, returned as a vector.

`m` — Current mode

`'auto'` | `'manual'`

Current mode, returned as one of these values:

- `'auto'` — Axes automatically determines the *r*-axis tick values.
- `'manual'` — Axes uses manually specified *r*-axis tick values.

Definitions

Tick Values

The tick values are the locations along the *r*-axis where the tick marks appear. The tick labels are the labels that you see next to each tick mark. Set the tick values using the `rticks` function. Set the corresponding tick labels using the `rticklabels` function.

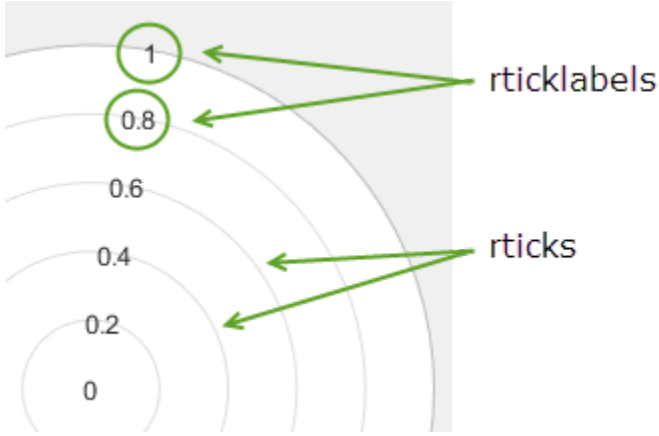

Algorithms

The `rticks` function sets and queries several axes properties related to the *r*-axis tick values.

- RTick — Property that stores the *r*-axis tick values.
- RTickMode — Property that stores the *r*-axis tick value mode. When you set the *r*-axis tick values, this property changes to `'manual'`.

See Also

See Also

Functions

`rlim` | `rtickangle` | `rtickformat` | `rticklabels` | `thetaticks`

Properties

PolarAxes Properties

Introduced in R2016b

ruler2num

Convert data from specific ruler to numeric data

Syntax

```
num = num2ruler(data,ruler)
```

Description

`num = num2ruler(data,ruler)` converts the values in `data` to numeric values. The `ruler` input indicates the ruler associated with `data`, which determines how to map the values to the corresponding numeric values. The output `num` is the same size as the input `data`.

Examples

Convert Date Value to Equivalent Numeric Value

Convert a date value to the equivalent numeric value in order to set the `Position` property of a text object.

Create a plot with dates along the *x*-axis. Add a text description to the fourth data point and return the text object.

```
t = datetime(2015,1,1:10);
y = [.2 .3 .5 .2 .8 .2 .3 .1 .3 .4];
plot(t,y,'-o')
txt = text(t(4),y(4),'My text');
```

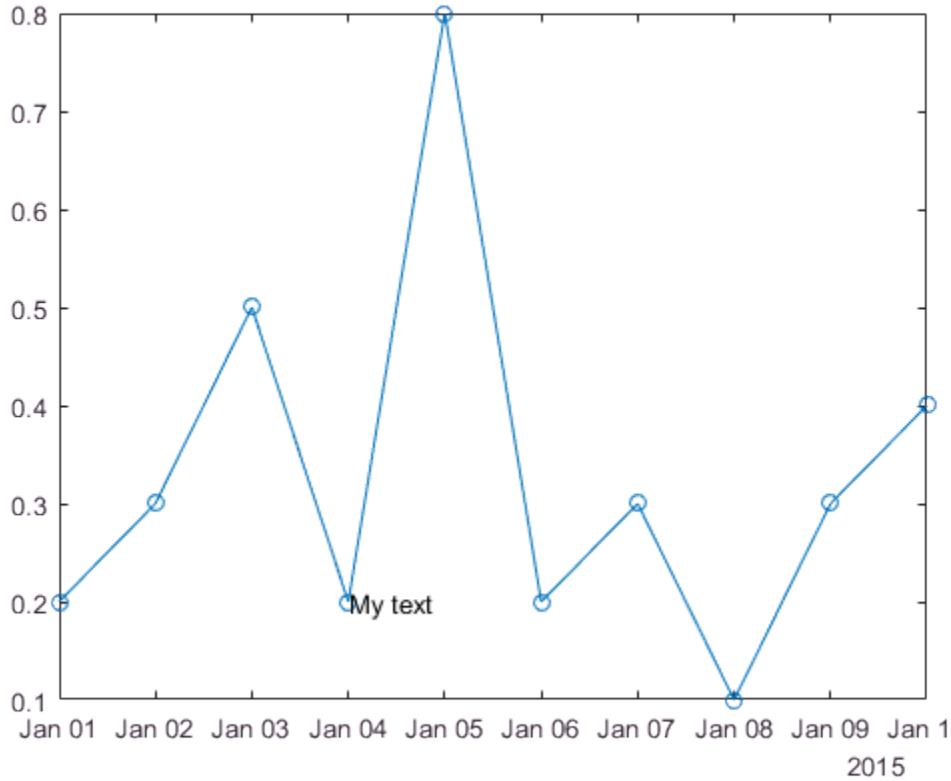

Change the position of the text to the sixth data point by setting the `Position` property of the text object. Since the `Position` property accepts only numeric values, convert the datetime value at the sixth data point to the equivalent numeric value.

```
ax = gca;
x6 = ruler2num(t(6),ax.XAxis);
txt.Position = [x6 y(6)];
```

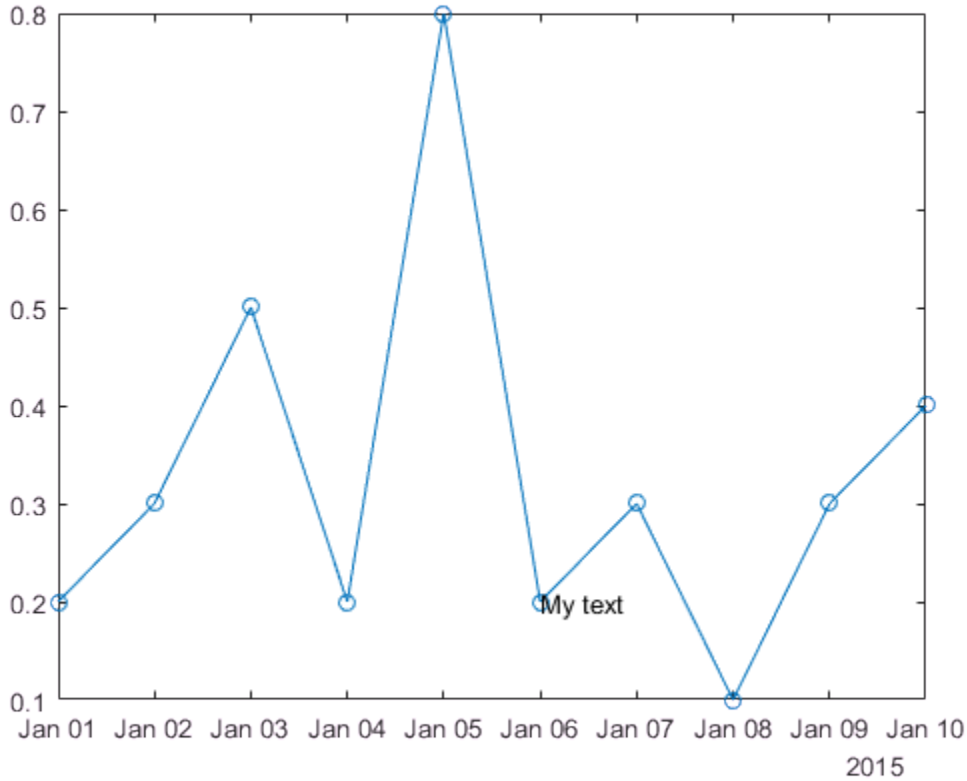

Input Arguments

`data` — Data values to convert to numeric values

array

Data values to convert to numeric values, specified as an array. If `data` is already numeric, then the output `num` is equal to the input `data`.

`ruler` — Ruler associated with input data

`DatetimeRuler` object | `DurationRuler` object | `NumericRuler` object

Ruler associated with the input data, specified as a `DatetimeRuler`, `DurationRuler`, or `NumericRuler` object. Specify the ruler object using the `XAxis`, `YAxis`, or `ZAxis` property of the `Axes` object. For example:

```
ax = gca;
num = ruler2num(data,ax.XAxis)
```

If you specify a `NumericRuler` object and the input `data` is not numeric, then the output `num` is determined by:

```
num = full(double(data))
```

See Also

See Also

`axes` | `datetime` | `duration` | `num2ruler`

Introduced in R2016b

run

Run MATLAB script

Syntax

```
run(scriptname)
```

Description

`run(scriptname)` runs the MATLAB script specified by `scriptname`.

Examples

Run Script Not on Current Path

Create a temporary folder that is not on your current path.

```
tmp = tempname;
mkdir(tmp)
```

Write MATLAB code to a file in the folder.

```
newFile = fullfile(tmp,'ANewFile.m');
fid = fopen(newFile,'w');
fprintf(fid,'Z = magic(5);\n');
fprintf(fid,'b = bar3(Z);\n');
fclose(fid);
```

Run the script.

```
run(newFile)
```

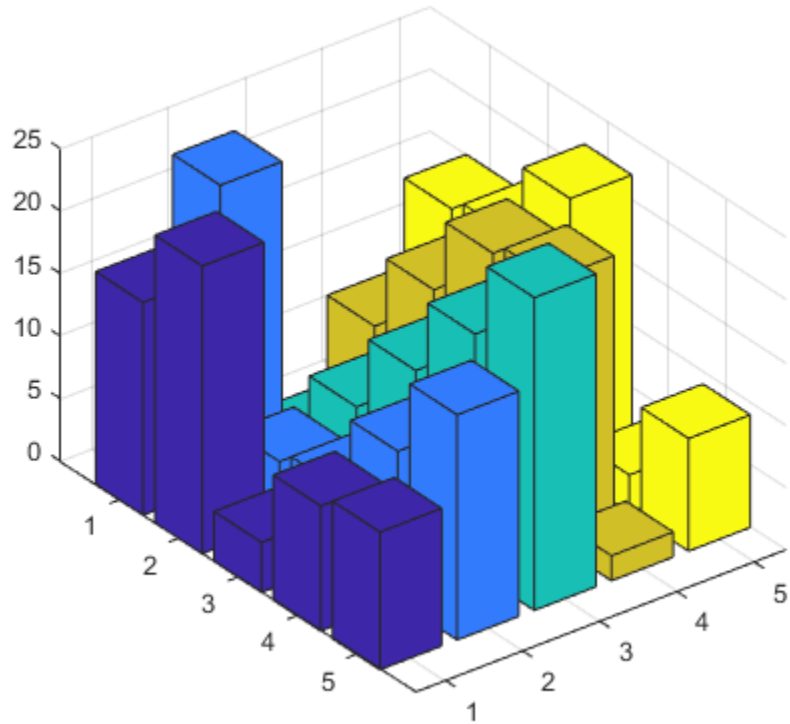

Input Arguments

`scriptname` — Full or relative script path

character vector

Full or relative script path to a MATLAB script, specified as a character vector. `scriptname` can specify any file type that MATLAB can execute, such as MATLAB script files, Simulink models, or MEX-files.

Example: `scriptname = 'myScript'`

Example: `scriptname = 'anotherScript.m'`

Example: `scriptname = 'oneMoreScript.mlx'`

Tips

- `run` executes scripts not currently on the MATLAB path. However, you should use `cd` or `addpath` to navigate to or to add the appropriate folder, making a script executable by entering its name alone.
- `scriptname` can access any variables in the current workspace.
- `run` changes to the folder that contains the script, executes it, and resets back to the original folder. If the script itself changes folders, then `run` does not revert to the original folder, unless `scriptname` changes to the folder in which this script resides.
- If `scriptname` corresponds to both a `.m` file and a P-file residing in the same folder, then `run` executes the P-file. This occurs even if you specify `scriptname` with a `.m` extension.
- If a script is not on the MATLAB path, executing the `run` command caches the script. In the same session and after calling `run`, you can edit the script using an external editor. Call `clear scriptname` before calling `run` again to use the changed version of the script rather than the cached version. If you edit the script with the MATLAB editor, `run` executes the changed version and there is no need to call `clear scriptname`.

See Also

See Also

`addpath` | `cd` | `path` | `pwd`

Topics

"Files and Folders that MATLAB Accesses"

Introduced before R2006a

runperf

Run set of tests for performance measurement

Syntax

```
results = runperf
results = runperf(tests)
results = runperf(tests,Name,Value)
```

Description

`results = runperf` runs all the tests in your current folder for performance measurements and returns an array of `MeasurementResult` objects. Each element in `results` corresponds to an element in the test suite.

The performance test framework runs the tests using a variable number of measurements to reach a sample mean with a 0.05 relative margin of error within a 0.95 confidence level. It runs the tests four times to warm up the code, and then between 4 and 32 times to collect measurements that meet the statistical objectives. If the sample mean does not meet the 0.05 relative margin of error within a 0.95 confidence level after 32 test runs, the performance test framework stops running the test and displays a warning. In this case, the `MeasurementResult` object contains information for the 4 warm-up runs and 32 measurement runs.

The `runperf` function provides a simple way to run a collection of tests as a performance experiment.

`results = runperf(tests)` runs a specified set of tests.

`results = runperf(tests,Name,Value)` runs a set of tests with additional options specified by one or more `Name,Value` pair arguments.

Examples

Run Script as Performance Test

In your current working folder, create a script-based test, `onesTest.m`, that uses three different methods to initialize a `1000x1500` matrix of ones.

```
rows = 1000;
cols = 1500;

%% Ones Function
X = ones(rows,cols);

%% Loop Assignment Without Preallocation
for r = 1:rows
    for c = 1:cols
        X(r,c) = 1;
    end
end

%% Loop Assignment With Preallocation
X = zeros(rows,cols);
for r = 1:rows
    for c = 1:cols
        X(r,c) = 1;
    end
end
```

Run the script as a performance test. Your results might vary.

```
results = runperf('onesTest');
```

```
Running onesTest
..........
..........
..........
......Warning: The target Relative Margin of Error was not met after running the MaxSar
....
..........
..........
..........
....
Done onesTest
__________
```

In the example output, the performance testing framework ran `OnesFunction` test the maximum number of times, but did not achieve a 0.05 relative margin of error with a 0.95 confidence level.

Display the results. The `results` variable is a `1x3 MeasurementResult` array. Each element in the array corresponds to one of the tests defined in the code section in `onesTest.m`.

```
results
```

```
results =

  1x3 MeasurementResult array with properties:

    Name
    Valid
    Samples
    TestActivity

Totals:
   3 Valid, 0 Invalid.
```

Display the measurement results for the second test, which loops the assignment without preallocation.

```
results(2)
```

```
ans =

  MeasurementResult with properties:

            Name: 'onesTest/LoopAssignmentWithoutPreallocation'
           Valid: 1
         Samples: [4x7 table]
    TestActivity: [8x12 table]

Totals:
   1 Valid, 0 Invalid.
```

Display the complete table of test measurements.

```
results(2).TestActivity
```

```
ans =
```

```
                      Name                        Passed    Failed    Incomplete    Me
    ____________________________________________  ______    ______    __________    __

    onesTest/LoopAssignmentWithoutPreallocation    true      false     false         0
    onesTest/LoopAssignmentWithoutPreallocation    true      false     false         0
    onesTest/LoopAssignmentWithoutPreallocation    true      false     false         0
    onesTest/LoopAssignmentWithoutPreallocation    true      false     false         0
    onesTest/LoopAssignmentWithoutPreallocation    true      false     false         0
    onesTest/LoopAssignmentWithoutPreallocation    true      false     false         0
    onesTest/LoopAssignmentWithoutPreallocation    true      false     false         0
    onesTest/LoopAssignmentWithoutPreallocation    true      false     false         0
```

The performance testing framework ran four warm-up runs, followed by four measurements runs (indicated as `sample` in the `Objective` column).

Display the mean measured time for the second test. To exclude data collected in the warm-up runs, use the values in the `Samples` field.

```
mean(results(2).Samples.MeasuredTime)
```

```
ans =

    0.3841
```

To compare the different initialization methods in the script, display the mean measured time for all the tests. Concatenate the values from the `Samples` field across the three elements in the `results` array. Then use `varfun` to group the table entries by name and compute the mean.

```
fullTable = vertcat(results.Samples);
varfun(@mean,fullTable,'InputVariables','MeasuredTime','GroupingVariables','Name')
```

```
ans =

                      Name                        GroupCount    mean_MeasuredTime
    ____________________________________________  __________    _________________

    onesTest/OnesFunction                         32            0.0031614
    onesTest/LoopAssignmentWithoutPreallocation    4              0.38408
    onesTest/LoopAssignmentWithPreallocation      26             0.016025
```

In the example output, the `ones` function was the fastest way to initialize the matrix to ones. The performance testing framework made 32 measurement runs for this test. Your results might vary.

Performance Tests from Select Unit Tests

In your current working folder, create a class-based test, `preallocationTest.m`, that compares different methods of preallocation.

```
classdef preallocationTest < matlab.perftest.TestCase
    methods(Test)
        function testOnes(testCase)
            x = ones(1,1e7);
        end

        function testIndexingWithVariable(testCase)
            id = 1:1e7;
            x(id) = 1;
        end

        function testIndexingOnLHS(testCase)
            x(1:1e7) = 1;
        end

        function testForLoop(testCase)
            for i=1:1e7
                x(i) = 1;
            end
        end

    end
end
```

The measurement boundary for the `preallocationTest` class is the test method. The time measurement for each test method includes all the code in method. For information on designating measurement boundaries, see the `startMeasuring` and `stopMeasuring` methods of `matlab.perftest.TestCase`.

Run performance tests for all the elements that contain `'Indexing'` in the name. Your results might vary, and you might see a warning if `runperf` doesn't meet statistical objectives.

```
results = runperf('preallocationTest','Name','*Indexing*')
```

```
Running preallocationTest
..........
..........
..........
..........
..
Done preallocationTest
__________


results =

  1x2 MeasurementResult array with properties:

    Name
    Valid
    Samples
    TestActivity

Totals:
   2 Valid, 0 Invalid.
```

Display the mean measured time for each of the tests. Concatenate the values from the `Samples` field across the two elements in the `results` array. Then use `varfun` to group the table entries by name and compute the mean.

```
fullTable = vertcat(results.Samples);
varfun(@mean,fullTable,'InputVariables','MeasuredTime','GroupingVariables','Name')
```

```
ans =

                        Name                        GroupCount    mean_MeasuredTime
    ____________________________________________    __________    _________________

    preallocationTest/testIndexingWithVariable       4             0.16637
    preallocationTest/testIndexingOnLHS             30            0.076792
```

Input Arguments

`tests` — Suite of tests

character vector | cell array of character vectors

Suite of tests specified as a character vector or cell array of character vectors. Each character vector in the cell array can contain the name of a test file, a test class, a test suite element name, a package containing your test classes, or a folder containing your test files.

Example: `runperf('ATestFile.m')`

Example: `runperf('ATestFile/aTest')`

Example: `runperf('mypackage.MyTestClass')`

Example: `runperf(pwd)`

Example:
`runperf({'mypackage.MyTestClass','ATestFile.m',pwd,'mypackage.subpackage'})`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `runperf(tests,'Name','productA_*')` runs test elements with a name that starts with `'productA_'`.

`'BaseFolder'` — Name of base folder

character vector

Name of the base folder that contains the file defining the test class, function, or script, specified as a character vector. This argument filters `TestSuite` array elements. For a test element to be included in the suite, the test element must be contained in the specified base folder. Use the wildcard character `*` to match any number of characters. Use the question mark character `?` to match a single character. For test files defined in packages, the base folder is the parent of the top-level package folder.

`'IncludeSubfolders'` — Indicator to run tests in subfolders
`false` (default) | `true` | `0` | `1`

Indicator to run tests in subfolders, specified as `false` or `true` (`0` or `1`). By default the framework runs tests in the specified folders, but not in their subfolders.

Data Types: `logical`

`'IncludeSubpackages'` — Indicator to run tests in subpackages
`false` (default) | `true` | `0` | `1`

Indicator to run tests in subpackages, specified as `false` or `true` (`0` or `1`). By default the framework runs tests in the specified packages, but not in their subpackages.

Data Types: `logical`

`'Name'` — Name of suite element
character vector

Name of the suite element, specified as a character vector. This argument filters `TestSuite` array elements. For the testing framework to run a test, the `Name` property of the test element must match the specified name. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match a single character.

`'ParameterName'` — Name of parameter
character vector

Name of a parameter used by the test suite element, specified as a character vector. This argument filters `TestSuite` array elements. Use the wildcard character `*` to match any number of characters. Use the question mark character `?` to match a single character.

`'ParameterProperty'` — Name of parameterization property
character vector

Name of a parameterization property used by the test suite element, specified as a character vector. This argument filters `TestSuite` array elements. Use the wildcard character `*` to match any number of characters. Use the question mark character `?` to match to a single character.

`'ProcedureName'` — Name of the test procedure in the test
character vector

Name of test procedure, specified as a character vector. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

In a class-based test, the `ProcedureName` is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title. Unlike `Name`, the name of the test procedure does not include any class or package name or information about parameterization.

`'Tag'` — Name of test element tag
character vector

Name of test element tag, specified as a character vector. This argument filters `TestSuite` array elements. Use the wildcard character `*` to match any number of characters. Use the question mark character `?` to match a single character.

Tips

- To customize the statistical objectives of the performance test, use the TimeExperiment class to construct and run the performance test.

Alternatives

To create a test suite explicitly, you can use the `testsuite` function or the matlab.unittest.TestSuite methods to create a suite. Then, you can run your performance test with the run method of your specified TimeExperiment.

See Also

See Also

matlab.perftest.FrequentistTimeExperiment | matlab.unittest.measurement.MeasurementResult | `runtests`

Topics

"Overview of Performance Testing Framework"

Introduced in R2016a

runtests

Run set of tests

Syntax

```
results = runtests
results = runtests(tests)
results = runtests(tests,Name,Value)
```

Description

`results = runtests` runs all the tests in your current folder, and returns the results as a `TestResult` object.

`results = runtests(tests)` runs a specified set of tests.

`results = runtests(tests,Name,Value)` runs a set of tests with additional options specified by one or more `Name,Value` pair arguments.

Examples

Run Tests in Working Folder

Create a folder `myExample` in your current working folder, and change into that folder.

In the `myExample` folder, create a test script, `typeTest.m`.

```
%% Test double class
exp = 'double';
act = ones;
assert(isa(act,exp))

%% Test single class
exp = 'single';
```

```
act = ones('single');
assert(isa(act,exp))

%% Test uint16 class
exp = 'uint16';
act = ones('uint16');
assert(isa(act,exp))
```

In the `myExample` folder, create a test script, `sizeValueTest.m`.

```
%% Test size
exp = [7 13];
act = ones([7 13]);
assert(isequal(size(act),exp))

%% Test values
act = ones(42);
assert(unique(act) == 1)
```

Run all tests in the current folder.

```
runtests
```

```
Running sizeValueTest
..
Done sizeValueTest
__________

Running typeTest
...
Done typeTest
__________


ans =

  1x5 TestResult array with properties:

    Name
    Passed
    Failed
    Incomplete
```

```
    Duration
    Details

Totals:
   5 Passed, 0 Failed, 0 Incomplete.
   0.038077 seconds testing time.
```

MATLAB® ran 5 tests. There are 2 passing tests from `sizeValueTest` and 3 passing tests from `typeTest`.

Run Tests Using File Name

Create the test file shown below, and save it as `runtestsExampleTest.m` on your MATLAB path.

```
function tests = runtestsExampleTest
tests = functiontests(localfunctions);

function testFunctionOne(testCase)
```

Run the tests.

```
results = runtests('runtestsExampleTest.m');
```

```
Running runtestsExampleTest
.
Done runtestsExampleTest
__________
```

Run Tests in Subfolder

If it does not exist, create the test file, `runtestsExampleTest.m`, in the example above.

Create a subfolder, `tmpTest`, and, in that folder, create the following `runtestsExampleSubFolderTest.m` file.

```
function tests = runtestsExampleSubFolderTest
tests = functiontests(localfunctions);

function testFunctionTwo(testCase)
```

Run the tests from the folder above `tmpTest` by setting `'IncludeSubfolders'` to true.

```
results = runtests(pwd,'IncludeSubfolders',true);
```

```
Running runtestsExampleTest
.
Done runtestsExampleTest
__________

Running runtestsExampleSubFolderTest
.
Done runtestsExampleSubFolderTest
__________
```

`runtests` ran the tests in both the current folder and the subfolder.

If you do not specify the `'IncludeSubfolders'` property for the `runtests` function, it does not run the test in the subfolder.

```
results = runtests(pwd);
```

```
Running runtestsExampleTest
.
Done runtestsExampleTest
__________
```

Run Tests in Parallel

Create the following test file, and save it as `runInParallelTest.m` on your MATLAB path.

```
function tests = runInParallelTest
tests = functiontests(localfunctions);

function testA(testCase)
verifyEqual(testCase,5,5);

function testB(testCase)
verifyTrue(testCase,logical(1));

function testC(testCase)
verifySubstring(testCase,'SomeLongText','Long');

function testD(testCase)
verifySize(testCase,ones(2,5,3),[2 5 3]);
```

```
function testE(testCase)
verifyGreaterThan(testCase,3,2);

function testF(testCase)
verifyEmpty(testCase,{},'Cell array is not empty.');

function testG(testCase)
verifyMatches(testCase,'Some Text','Some [Tt]ext');
```

Run the tests in parallel. Running tests in parallel requires the Parallel Computing Toolbox. The testing framework might vary the order and number of groups or which tests it includes in each group.

```
results = runtests('runInParallelTest','UseParallel',true);
```

```
Split tests into 7 groups and running them on 4 workers.
----------------
Finished Group 2
----------------
Running runInParallelTest
.
Done runInParallelTest
__________


----------------
Finished Group 3
----------------
Running runInParallelTest
.
Done runInParallelTest
__________


----------------
Finished Group 1
----------------
Running runInParallelTest
.
Done runInParallelTest
__________


----------------
```

```
Finished Group 4
----------------
Running runInParallelTest
.
Done runInParallelTest
__________


----------------
Finished Group 6
----------------
Running runInParallelTest
.
Done runInParallelTest
__________


----------------
Finished Group 5
----------------
Running runInParallelTest
.
Done runInParallelTest
__________


----------------
Finished Group 7
----------------
Running runInParallelTest
.
Done runInParallelTest
__________
```

Run Select Parameterized Tests

In your working folder, create `testZeros.m`. This class contains four test methods.

```
classdef testZeros < matlab.unittest.TestCase
    properties (TestParameter)
        type = {'single','double','uint16'};
        outSize = struct('s2d',[3 3], 's3d',[2 5 4]);
    end
```

```
    methods (Test)
        function testClass(testCase, type, outSize)
            testCase.verifyClass(zeros(outSize,type), type);
        end

        function testSize(testCase, outSize)
            testCase.verifySize(zeros(outSize), outSize);
        end

        function testDefaultClass(testCase)
            testCase.verifyClass(zeros, 'double');
        end
        function testDefaultSize(testCase)
            testCase.verifySize(zeros, [1 1]);
        end

        function testDefaultValue(testCase)
            testCase.verifyEqual(zeros,0);
        end
    end
end
```

The full test suite has 11 test elements: 6 from the `testClass` method, 2 from the `testSize` method, and 1 each from the `testDefaultClass`, `testDefaultSize`, and `testDefaultValue` methods.

At the command prompt, run the test elements that use the `outSize` parameter property.

```
runtests('testZeros','ParameterProperty','outSize')
```

```
Running testZeros
........
Done testZeros
__________


ans =

  1×8 TestResult array with properties:

    Name
    Passed
    Failed
```

```
    Incomplete
    Duration
    Details

Totals:
   8 Passed, 0 Failed, 0 Incomplete.
   0.13253 seconds testing time.
```

The `runtests` function executed eight tests that use the `outSize` parameter property: six from the `testClass` method and two from the `testSize` method.

At the command prompt, run the test elements that use the `single` parameter name.

```
runtests('testZeros','ParameterName','single')
```

```
Running testZeros
..
Done testZeros
__________


ans =

  1×2 TestResult array with properties:

    Name
    Passed
    Failed
    Incomplete
    Duration
    Details

Totals:
   2 Passed, 0 Failed, 0 Incomplete.
   0.021926 seconds testing time.
```

The `runtests` function executed the two tests from the `testClass` method that use the `outSize` parameter name.

- "Write Function-Based Unit Tests"
- "Write Simple Test Case Using Functions"
- "Write Test Using Setup and Teardown Functions"

Input Arguments

`tests` — Array of tests

character vector | cell array of character vectors

Suite of tests specified as a character vector or cell array of character vectors. Each character vector in the cell array can contain the name of a test file, a test class, a test suite element name, a package containing your test classes, or a folder containing your test files.

Example: `runtests('ATestFile.m')`

Example: `runtests('ATestFile/aTest')`

Example: `runtests('mypackage.MyTestClass')`

Example: `runtests(pwd)`

Example: `runtests({'mypackage.MyTestClass','ATestFile.m',pwd,'mypackage.subpackage'})`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `runtests(tests,'Name','productA_*')` runs test elements with a name that starts with `'productA_'`.

`'BaseFolder'` — Name of base folder

character vector

Name of the base folder that contains the file defining the test class, function, or script, specified as a character vector. This argument filters `TestSuite` array elements. For a test element to be included in the suite, the test element must be contained in the specified base folder. Use the wildcard character `*` to match any number of characters. Use the question mark character `?` to match a single character. For test files defined in packages, the base folder is the parent of the top-level package folder.

`'Debug'` — Indicator to apply debugging capabilities

`false` (default) | `true` | `0` | `1`

Indicator to apply debugging capabilities when running `tests`, specified as `false` or `true` (`0` or `1`). For example, if a test failure is encountered, the framework pauses test execution to enter debug mode.

Data Types: `logical`

`'IncludeSubfolders'` — Indicator to run tests in subfolders
`false` (default) | `true` | `0` | `1`

Indicator to run tests in subfolders, specified as `false` or `true` (`0` or `1`). By default the framework runs tests in the specified folders, but not in their subfolders.

Data Types: `logical`

`'IncludeSubpackages'` — Indicator to run tests in subpackages
`false` (default) | `true` | `0` | `1`

Indicator to run tests in subpackages, specified as `false` or `true` (`0` or `1`). By default the framework runs tests in the specified packages, but not in their subpackages.

Data Types: `logical`

`'Name'` — Name of suite element
character vector

Name of the suite element, specified as a character vector. This argument filters `TestSuite` array elements. For the testing framework to run a test, the `Name` property of the test element must match the specified name. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match a single character.

`'ParameterName'` — Name of parameter
character vector

Name of a parameter used by the test suite element, specified as a character vector. This argument filters `TestSuite` array elements. Use the wildcard character `*` to match any number of characters. Use the question mark character `?` to match a single character.

`'ParameterProperty'` — Name of parameterization property
character vector

Name of a parameterization property used by the test suite element, specified as a character vector. This argument filters `TestSuite` array elements. Use the wildcard

character * to match any number of characters. Use the question mark character ? to match to a single character.

'ProcedureName' — Name of the test procedure in the test
character vector

Name of test procedure, specified as a character vector. This argument filters TestSuite array elements. Use the wildcard character, *, to match any number of characters. Use the question mark character, ?, to match to exactly one character.

In a class-based test, the ProcedureName is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title. Unlike Name, the name of the test procedure does not include any class or package name or information about parameterization.

'Strict' — Indicator to apply strict checks
false (default) | true | 0 | 1

Indicator to apply strict checks when running tests, specified as false or true (0 or 1). For example, the framework generates a qualification failure if a test issues a warning.

Data Types: logical

'Tag' — Name of test element tag
character vector

Name of test element tag, specified as a character vector. This argument filters TestSuite array elements. Use the wildcard character * to match any number of characters. Use the question mark character ? to match a single character.

'UseParallel' — Indicator to run tests in parallel
false (default) | true | 0 | 1

Indicator to run tests in parallel, specified as false or true (0 or 1). By default runtests runs tests in serial. If you set UseParallel to true, the runtests function divides the test suite into separate groups and runs the groups in parallel if:

- The Parallel Computing Toolbox is installed.
- An open parallel pool exists or automatic pool creation is enabled in the Parallel Preferences.

Otherwise, runtests runs tests in serial regardless of the value for UseParallel.

Note: Running tests in parallel requires the Parallel Computing Toolbox. The testing framework might vary the order and number of groups or which tests it includes in each group.

Testing in parallel might not be compatible with other options. For example, testing occurs in serial if `'UseParallel'` and `'Debug'` are both set to true.

Data Types: `logical`

`'Verbosity'` — Verbosity level for test run
`1 | 2 | 3 | 4 | matlab.unittest.Verbosity` enumeration

Verbosity level for test run, specified as an integer value from 1 through 4, or as a `matlab.unittest.Verbosity` enumeration object. The `runtests` function displays the progress of a test run and messages logged by the TestCase.log method at the specified verbosity level or lower. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration.

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
1	`matlab.unittest.Verbosity.T`	Minimal information
2	`matlab.unittest.Verbosity.C`	Moderate amount of information
3	`matlab.unittest.Verbosity.D`	Some supplemental information
4	`matlab.unittest.Verbosity.V`	Lots of supplemental information

See Also

See Also

matlab.unittest.TestResult | matlab.unittest.TestRunner | matlab.unittest.TestSuite | `functiontests`

Topics

"Write Function-Based Unit Tests"

"Write Simple Test Case Using Functions"
"Write Test Using Setup and Teardown Functions"

Introduced in R2013b

Chart Surface Properties

Control chart surface appearance and behavior

Description

Chart surface properties control the appearance and behavior of chart surface objects. By changing property values, you can modify certain aspects of the surface.

Starting in R2014b, you can use dot notation to query and set properties.

```
h = surf(...);
c = h.CData;
h.CDataMapping = 'direct';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Faces

`FaceColor` — Face color
`'flat'` (default) | `'interp'` | `'none'` | `'texturemap'` | RGB triplet | character vector of color name

Face color, specified as one of the values in this table.

Value	Description
`'flat'`	Use a different color for each face based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color value at the first vertex of each face (in the positive *x* and *y* directions) determines the color for the entire face. You cannot use this value when the `FaceAlpha` property is set to `'interp'`.

Value	Description
	
`'interp'`	Use interpolated coloring for each face based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color varies across each face by bilinearly interpolating the color values at the vertices. You cannot use this value when the `FaceAlpha` property is set to `'flat'`. 

Value	Description
RGB triplet or color name	Use the specified color for all the faces. This option does not use the color values in the `CData` property. 
`'texturemap'`	Transform the color data in `CData` so that it conforms to the surface.
`'none'`	Do not draw the faces.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`FaceAlpha` — Face transparency

1 (default) | scalar in range `[0,1]` | `'flat'` | `'interp'` | `'texturemap'`

Face transparency, specified as one of these values:

- Scalar in range `[0,1]` — Use uniform transparency across all the faces. A value of `1` is fully opaque and `0` is completely transparent. Values between `0` and `1` are semitransparent. This option does not use the transparency values in the `AlphaData` property.
- `'flat'` — Use a different transparency for each face based on the values in the `AlphaData` property. The transparency value at the first vertex determines the transparency for the entire face. First you must specify the `AlphaData` property as a matrix the same size as the `ZData` property. The `FaceColor` property also must be set to `'flat'`.
- `'interp'` — Use interpolated transparency for each face based on the values in `AlphaData` property. The transparency varies across each face by interpolating the values at the vertices. First you must specify the `AlphaData` property as a matrix the same size as the `ZData` property. The `FaceColor` property also must be set to `'interp'`.
- `'texturemap'` — Transform the data in `AlphaData` so that it conforms to the surface.

`FaceLighting` — Effect of light objects on faces

`'flat'` (default) | `'gouraud'` | `'none'`

Effect of light objects on faces, specified as one of these values:

- `'flat'` — Apply light uniformly across each face. Use this value to view faceted objects.
- `'gouraud'` — Vary the light across the faces. Calculate the light at the vertices and then linearly interpolate the light across the faces. Use this value to view curved surfaces.
- `'none'` — Do not apply light from light objects to the faces.

To add a light object to the axes, use the `light` function.

Note: The `'phong'` value has been removed. Use `'gouraud'` instead.

`BackFaceLighting` — Face lighting when normals point away from camera

`'reverselit'` (default) | `'unlit'` | `'lit'`

Face lighting when the vertex normals point away from camera, specified as one of these values:

- `'reverselit'` — Light the face as if the vertex normal pointed towards the camera.
- `'unlit'` — Do not light the face.
- `'lit'` — Light the face according to the vertex normal.

Use this property to discriminate between the internal and external surfaces of an object. For an example, see "Back Face Lighting".

Edges

`MeshStyle` — Edges to display

`'both'` (default) | `'row'` | `'column'`

Edges to display, specified as `'both'`, `'row'`, or `'column'`.

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`EdgeColor` — Edge line color

`[0 0 0]` (default) | `'none'` | `'flat'` | `'interp'` | RGB triplet | character vector of color name

Edge line color, specified as one of the values listed here. The default color of `[0 0 0]` corresponds to black edges.

Value	Description
`'none'`	Do not draw the edges.
`'flat'`	Use a different color for each edge based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color value at the first vertex of each face (in the positive *x* and *y* directions) determines the color for the adjacent edges. You cannot use this value when the `EdgeAlpha` property is set to `'interp'`.
`'interp'`	Use interpolated coloring for each edge based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color varies across each edge by linearly interpolating the color values at the vertices. You cannot use this value when the `EdgeAlpha` property is set to `'flat'`.

Value	Description
	
RGB triplet or color name	Use the specified color for all the edges. This option does not use the color values in the `CData` property. 

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`

Long Name	Short Name	RGB Triplet
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

EdgeAlpha — Edge transparency

1 (default) | scalar value in range [0,1] | 'flat' | 'interp'

Edge transparency, specified as one of these values:

- Scalar in range [0,1] — Use uniform transparency across all of the edges. A value of 1 is fully opaque and 0 is completely transparent. Values between 0 and 1 are semitransparent. This option does not use the transparency values in the AlphaData property.
- 'flat' — Use a different transparency for each edge based on the values in the AlphaData property. First you must specify the AlphaData property as a matrix the same size as the ZData property. The transparency value at the first vertex determines the transparency for the entire edge. The EdgeColor property also must be set to 'flat'.
- 'interp' — Use interpolated transparency for each edge based on the values in AlphaData property. First you must specify the AlphaData property as a matrix the same size as the ZData property. The transparency varies across each edge by interpolating the values at the vertices. The EdgeColor property also must be set to 'interp'.

EdgeLighting — Effect of light objects on edges

'none' (default) | 'flat' | 'gouraud'

Effect of light objects on edges, specified as one of these values:

- 'flat' — Apply light uniformly across the each edges.
- 'none' — Do not apply lights from light objects to the edges.
- 'gouraud' — Calculate the light at the vertices, and then linearly interpolate across the edges.

Note: The 'phong' value has been removed. Use 'gouraud' instead.

`AlignVertexCenters` — Sharp vertical and horizontal lines

`'off'` (default) | `'on'`

Sharp vertical and horizontal lines, specified as `'off'` or `'on'`.

If the associated figure has a GraphicsSmoothing property set to `'on'` and a Renderer property set to `'opengl'`, then the figure applies a smoothing technique to plots. In some cases, this smoothing technique can cause vertical and horizontal lines to appear uneven in thickness or color. Use the `AlignVertexCenters` property to eliminate the uneven appearance.

- `'off'` — Do not sharpen vertical or horizontal lines. The lines might appear uneven in thickness or color.
- `'on'` — Sharpen vertical and horizontal lines to eliminate an uneven appearance.

Note: You must have a graphics card that supports this feature. To see if the feature is supported, type `opengl info`. If it is supported, then the returned fields contain the line `SupportsAlignVertexCenters: 1`.

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'*'` | `...`

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond

Value	Description
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerSize` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | `'flat'` | RGB triplet | character vector of color name

Marker outline color, specified as specified as one of these values:

- `'auto'` — Use the same color as the `EdgeColor` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- `'flat'` — Use the `CData` value at the vertex to set the color.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`

Long Name	Short Name	RGB Triplet
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

MarkerFaceColor — Marker fill color

'none' (default) | 'auto' | 'flat' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which allows the background to show through.
- 'auto' — Use the same color as the Color property for the axes.
- 'flat' — Use the CData value of the vertex to set the color.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]

Long Name	Short Name	RGB Triplet
`'black'`	`'k'`	`[0 0 0]`

This property affects only the circle, square, diamond, pentagram, hexagram, and the four triangle marker types.

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Example:

Face and Vertex Normals

`FaceNormals` — Normal vectors for each surface face

[ ] (default) | (m-1)-by-(n-1)-by-3 array

Normal vectors for each surface face, specified as a (m-1)-by-(n-1)-by-3 array, where `[m,n] = size(ZData)`. Specify one normal vector per face.

Specifying values for this property sets the associated mode to manual. If you do not specify normal vectors, then the surface generates this data for lighting calculations.

Data Types: `single` | `double`

`FaceNormalsMode` — Selection mode for `FaceNormals`

`'auto'` (default) | `'manual'`

Selection mode for `FaceNormals`, specified as one of these values:

- `'auto'` — Calculate the normal vectors based on the coordinate data.
- `'manual'` — Use manually specified values. To specify the values, set the `FaceNormals` property.

`VertexNormals` — Normal vectors for each surface vertex

[ ] (default) | m-by-n-by-3 array

Normal vectors for each surface vertex, specified as a m-by-n-by-3 array, where `[m,n] = size(ZData)`. Specify one normal vector per vertex.

Specifying values for this property sets the associated mode to manual. If you do not specify normal vectors, then the surface generates this data for lighting calculations.

Data Types: `single` | `double`

`VertexNormalsMode` — Selection mode for `VertexNormals`
`'auto'` (default) | `'manual'`

Selection mode for `VertexNormals`, specified as one of these values:

- `'auto'` — Calculate the normal vectors based on the coordinate data.
- `'manual'` — Use manually specified values. To specify the values, set the `VertexNormals` property.

`NormalMode` — (removed) Selection mode for `VertexNormals`
`'auto'` (default) | `'manual'`

The `NormalMode` property will be removed in a future release. Use `VertexNormalsMode` instead.

Color and Transparency Mapping

`CData` — Vertex colors
2-D or 3-D array

Vertex colors, specified in one of these forms:

- 2-D array — Use colormap colors. Specify a color for each vertex by setting `CData` to an array the same size as `ZData`. The `CDataMapping` property determines how these values map into the current colormap. If the `FaceColor` property is set to `'texturemap'`, then `CData` does not need to be the same size as `ZData`. However, it must be of type `double` or `uint8`. The `CData` values map to conform to the surface defined by `ZData`.
- 3-D array — Use true colors. Specify an RGB triplet color for each vertex by setting `CData` to an m-by-n-by-3 array where `[m,n] = size(ZData)`. An RGB triplet is a three-element vector that specifies the intensities of the red, green, and blue components of a color. The first page of the array contains the red components, the second the green components, and the third the blue components of the colors. Since the surface uses true colors instead of colormap colors, the `CDataMapping` property has no effect.
    - If `CData` is of type `double` or `single`, then an RGB triplet value of `[0 0 0]` corresponds to black and `[1 1 1]` corresponds to white.

- If `CData` is an integer type, then the surface uses the full range of data to determine the color. For example, if `CData` is of type `uint8`, then `[0 0 0]` corresponds to black and `[255 255 255]` corresponds to white. If `CData` is of type `int8`, then `[-128 -128 -128]` corresponds to black and `[127 127 127]` corresponds to white.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`CDataMode` — Selection mode for `CData`

`'auto'` (default) | `'manual'`

Selection mode for `CData`, specified as one of these values:

- `'auto'` — Use the `ZData` values to set the colors.
- `'manual'` — Use manually specified values. To specify the values, set the `CData` property.

`CDataSource` — Variable linked to `CData`

`''` | character vector containing MATLAB workspace variable name

Variable linked to `CData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `CData`.

By default, there is no linked variable, so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `CData` values immediately. To force an update of the values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, then you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

`CDataMapping` — Color mapping method

`'scaled'` (default) | `'direct'`

Color mapping method, specified as `'scaled'` or `'direct'`. Use this property to control the mapping of color data values in `CData` into the colormap.

The methods have these effects:

- `'direct'` — Interpret the values as indices into the current colormap. Values with a decimal portion are fixed to the nearest lower integer.
  - If the values are of type `double` or `single`, then values of `1` or less map to the first color in the colormap. Values equal to or greater than the length of the colormap map to the last color in the colormap.
  - If the values are of type `uint8`, `uint16`, `uint32`, `uint64` , `int8`, `int16`, `int32`, or `int64`, then values of `0` or less map to the first color in the colormap. Values equal to or greater than the length of the colormap map to the last color in the colormap (or up to the range limits of the type).
  - If the values are of type `logical`, then values of `0` map to the first color in the colormap and values of `1` map to the second color in the colormap.
- `'scaled'` — Scale the values to range between the minimum and maximum color limits. The CLim property of the axes contains the color limits.

`AlphaData` — Transparency data

1 (default) | array same size as `ZData`

Transparency data for each vertex, specified as an array the same size as the `ZData` property. After specifying the values, set the `FaceAlpha` and `EdgeAlpha` properties to control the type of transparency. If the `FaceAlpha` and `EdgeAlpha` properties are both set to scalar values, then the chart surface does not use the `AlphaData` values.

The `AlphaDataMapping` property determines how the chart surface interprets the `AlphaData` property values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`AlphaDataMapping` — Interpretation of `AlphaData` values

`'scaled'` (default) | `'direct'` | `'none'`

Interpretation of `AlphaData` values, specified as one of these values:

- `'none'` — Interpret the values as transparency values. A value of 1 or greater is completely opaque, a value of 0 or less is completely transparent, and a value between 0 and 1 is semitransparent.
- `'scaled'` — Map the values into the figure's alphamap. The minimum and maximum alpha limits of the axes determine the `AlphaData` values that map to the first and last elements in the alphamap, respectively. For example, if the alpha limits

are `[3 5]`, then values of `3` or less map to the first element in the alphamap. Values of `5` or greater map to the last element in the alphamap. The ALim property of the axes contains the alpha limits. The Alphamap property of the figure contains the alphamap.

- `'direct'` — Interpret the values as indices into the figure's alphamap. Values with a decimal portion are fixed to the nearest lower integer.
  - If the values are of type `double` or `single`, then values of 1 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap.
  - If the values are of integer type, then values of 0 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap (or up to the range limits of the type). The integer types are `uint8`, `uint16`, `uint32`, `uint64` , `int8`, `int16`, `int32`, and `int64`.
  - If the values are of type `logical`, then values of 0 map to the first element in the alphamap and values of 1 map to the second element in the alphamap.

Ambient Lighting

`AmbientStrength` — Strength of ambient light

`0.3` (default) | scalar in range `[0,1]`

Strength of ambient light, specified as a scalar value in the range `[0,1]`. Ambient light is a nondirectional light that illuminates the entire scene. There must be at least one visible light object in the axes for the ambient light to be visible.

The AmbientLightColor property for the axes sets the color of the ambient light. The color is the same for all objects in the axes.

Example: `0.5`

Data Types: `double`

`DiffuseStrength` — Strength of diffuse light

`0.6` (default) | scalar in range `[0,1]`

Strength of diffuse light, specified as a scalar value in the range `[0,1]`. Diffuse light is the nonspecular reflectance from light objects in the axes.

Example: `0.3`

Data Types: `double`

`SpecularColorReflectance` — Color of specular reflections

1 (default) | scalar in range `[0,1]`

Color of specular reflections, specified as a scalar value in the range `[0,1]`. A value of `1` sets the color using only the color of the light source. A value of `0` sets the color using both the color of the object from which it reflects and the color of the light source. The Color property of the light contains the color of the light source. The proportions vary linearly for values in between.

Example: `0.5`

Data Types: `double`

`SpecularExponent` — Size of specular spot

10 (default) | scalar greater than or equal to 1

Size of specular spot, specified as a scalar value greater than or equal to 1. Most materials have exponents in the range `[5 20]`.

Example: `7`

Data Types: `double`

`SpecularStrength` — Strength of specular reflection

`0.9` (default) | scalar in range `[0,1]`

Strength of specular reflection, specified as a scalar value in the range `[0,1]`. Specular reflections are the bright spots on the surface from light objects in the axes.

Example: `0.3`

Data Types: `double`

Data

`XData` — *x*-coordinate data

matrix | vector

x-coordinate data specified as a matrix that is the same size as `ZData` or as a vector of length `n`, where `[m,n] = size(ZData)`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`YData` — *y*-coordinate data

matrix | vector

y-coordinate data, specified as a matrix that is the same size as `ZData` or a vector of length `m`, where `[m,n] = size(ZData)`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ZData` — *z*-coordinate data

matrix

z-coordinate data, specified as a matrix.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`XDataSource` — Variable linked to `XData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `XData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `XData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `XData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'x'`

`YDataSource` — Variable linked to `YData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `YData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `YData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `YData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'y'`

`ZDataSource` — Variable linked to `ZData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `ZData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `ZData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `ZData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'z'`

`XDataMode` — Selection mode for `XData`

`'auto'` | `'manual'`

Selection mode for `XData`, specified as one of these values:

- `'auto'` — Use the column indices of `ZData`..
- `'manual'` — Use manually specified values. To specify the values, use an input argument to the plotting function or directly set the `XData` property.

`YDataMode` — Selection mode for `YData`

`'auto'` | `'manual'`

Selection mode for `YData`, specified as one of these values:

- `'auto'` — Use the row indices of `ZData`.
- `'manual'` — Use manually specified values. To specify the values, use an input argument to the plotting function or directly set the `YData` property.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'surface'`

This property is read-only.

Type of graphics object, returned as `'surface'`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with

a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
```

```
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Chart Surface` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `Chart Surface` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `Chart Surface` object that has no color. The `HitTest` property determines if the `Chart Surface` object responds to the click or if an ancestor does.

- `'none'` — Cannot capture mouse clicks. Clicking the `Chart Surface` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Chart Surface` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Chart Surface` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Chart Surface` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Chart Surface` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Chart Surface` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`mesh` | `meshc` | `meshz` | `surf` | `surfc`

Topics
"Access Property Values"

"Graphics Object Properties"

Primitive Surface Properties

Control primitive surface appearance and behavior

Description

Primitive surface properties control the appearance and behavior of primitive surface objects. By changing property values, you can modify certain aspects of the primitive surface.

Starting in R2014b, you can use dot notation to query and set properties.

```
s = surface;
c = s.CData;
s.CDataMapping = 'direct';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Faces

`FaceColor` — Face color
`'flat'` (default) | `'interp'` | `'none'` | `'texturemap'` | RGB triplet | character vector of color name

Face color, specified as one of the values in this table.

Value	Description
`'flat'`	Use a different color for each face based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color value at the first vertex of each face (in the positive *x* and *y* directions) determines the color for the entire face. You cannot use this value when the `FaceAlpha` property is set to `'interp'`.

Value	Description
	
`'interp'`	Use interpolated coloring for each face based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color varies across each face by bilinearly interpolating the color values at the vertices. You cannot use this value when the `FaceAlpha` property is set to `'flat'`. 

Value	Description
RGB triplet or color name	Use the specified color for all the faces. This option does not use the color values in the `CData` property. 
`'texturemap'`	Transform the color data in `CData` so that it conforms to the surface.
`'none'`	Do not draw the faces.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`FaceAlpha` — Face transparency

1 (default) | scalar in range `[0,1]` | `'flat'` | `'interp'` | `'texturemap'`

Face transparency, specified as one of these values:

- Scalar in range `[0,1]` — Use uniform transparency across all the faces. A value of `1` is fully opaque and `0` is completely transparent. Values between `0` and `1` are semitransparent. This option does not use the transparency values in the `AlphaData` property.
- `'flat'` — Use a different transparency for each face based on the values in the `AlphaData` property. The transparency value at the first vertex determines the transparency for the entire face. First you must specify the `AlphaData` property as a matrix the same size as the `ZData` property. The `FaceColor` property also must be set to `'flat'`.
- `'interp'` — Use interpolated transparency for each face based on the values in `AlphaData` property. The transparency varies across each face by interpolating the values at the vertices. First you must specify the `AlphaData` property as a matrix the same size as the `ZData` property. The `FaceColor` property also must be set to `'interp'`.
- `'texturemap'` — Transform the data in `AlphaData` so that it conforms to the surface.

`FaceLighting` — Effect of light objects on faces

`'flat'` (default) | `'gouraud'` | `'none'`

Effect of light objects on faces, specified as one of these values:

- `'flat'` — Apply light uniformly across each face. Use this value to view faceted objects.
- `'gouraud'` — Vary the light across the faces. Calculate the light at the vertices and then linearly interpolate the light across the faces. Use this value to view curved surfaces.
- `'none'` — Do not apply light from light objects to the faces.

To add a light object to the axes, use the `light` function.

Note: The `'phong'` value has been removed. Use `'gouraud'` instead.

`BackFaceLighting` — Face lighting when normals point away from camera

`'reverselit'` (default) | `'unlit'` | `'lit'`

Face lighting when the vertex normals point away from camera, specified as one of these values:

- `'reverselit'` — Light the face as if the vertex normal pointed towards the camera.
- `'unlit'` — Do not light the face.
- `'lit'` — Light the face according to the vertex normal.

Use this property to discriminate between the internal and external surfaces of an object. For an example, see "Back Face Lighting".

Edges

`EdgeColor` — Edge line color

`[0 0 0]` (default) | `'none'` | `'flat'` | `'interp'` | RGB triplet | character vector of color name

Edge line color, specified as one of the values listed here. The default color of `[0 0 0]` corresponds to black edges.

Value	Description
`'none'`	Do not draw the edges.
`'flat'`	Use a different color for each edge based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color value at the first vertex of each face (in the positive *x* and *y* directions) determines the color for the adjacent edges. You cannot use this value when the `EdgeAlpha` property is set to `'interp'`.

Value	Description
`'interp'`	Use interpolated coloring for each edge based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color varies across each edge by linearly interpolating the color values at the vertices. You cannot use this value when the `EdgeAlpha` property is set to `'flat'`. 

Value	Description
RGB triplet or color name	Use the specified color for all the edges. This option does not use the color values in the `CData` property. 

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`EdgeAlpha` — Edge transparency

1 (default) | scalar value in range `[0,1]` | `'flat'` | `'interp'`

Edge transparency, specified as one of these values:

- Scalar in range `[0,1]` — Use uniform transparency across all of the edges. A value of `1` is fully opaque and `0` is completely transparent. Values between `0` and `1` are

semitransparent. This option does not use the transparency values in the `AlphaData` property.

- `'flat'` — Use a different transparency for each edge based on the values in the `AlphaData` property. First you must specify the `AlphaData` property as a matrix the same size as the `ZData` property. The transparency value at the first vertex determines the transparency for the entire edge. The `EdgeColor` property also must be set to `'flat'`.
- `'interp'` — Use interpolated transparency for each edge based on the values in `AlphaData` property. First you must specify the `AlphaData` property as a matrix the same size as the `ZData` property. The transparency varies across each edge by interpolating the values at the vertices. The `EdgeColor` property also must be set to `'interp'`.

`EdgeLighting` — Effect of light objects on edges

`'none'` (default) | `'flat'` | `'gouraud'`

Effect of light objects on edges, specified as one of these values:

- `'flat'` — Apply light uniformly across the each edges.
- `'none'` — Do not apply lights from light objects to the edges.
- `'gouraud'` — Calculate the light at the vertices, and then linearly interpolate across the edges.

Note: The `'phong'` value has been removed. Use `'gouraud'` instead.

`LineStyle` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	————————
`'--'`	Dashed line	- — — — —
`':'`	Dotted line	……

Line Style	Description	Resulting Line
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`AlignVertexCenters` — Sharp vertical and horizontal lines

`'off'` (default) | `'on'`

Sharp vertical and horizontal lines, specified as `'off'` or `'on'`.

If the associated figure has a GraphicsSmoothing property set to `'on'` and a Renderer property set to `'opengl'`, then the figure applies a smoothing technique to plots. In some cases, this smoothing technique can cause vertical and horizontal lines to appear uneven in thickness or color. Use the `AlignVertexCenters` property to eliminate the uneven appearance.

- `'off'` — Do not sharpen vertical or horizontal lines. The lines might appear uneven in thickness or color.
- `'on'` — Sharpen vertical and horizontal lines to eliminate an uneven appearance.

Note: You must have a graphics card that supports this feature. To see if the feature is supported, type `opengl info`. If it is supported, then the returned fields contain the line `SupportsAlignVertexCenters: 1`.

`MeshStyle` — Edges to display

`'both'` (default) | `'row'` | `'column'`

Edges to display, specified as `'both'`, `'row'`, or `'column'`.

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'*'` | `...`

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerSize` — Marker size

`6` (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | `'flat'` | RGB triplet | character vector of color name

Marker outline color, specified as specified as one of these values:

- `'auto'` — Use the same color as the `EdgeColor` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- `'flat'` — Use the `CData` value at the vertex to set the color.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`MarkerFaceColor` — Marker fill color

`'none'` (default) | `'auto'` | `'flat'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which allows the background to show through.
- `'auto'` — Use the same color as the Color property for the axes.
- `'flat'` — Use the `CData` value of the vertex to set the color.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

This property affects only the circle, square, diamond, pentagram, hexagram, and the four triangle marker types.

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Example:

Face and Vertex Normals

`FaceNormals` — Normal vectors for each surface face

`[ ]` (default) | (m-1)-by-(n-1)-by-3 array

Normal vectors for each surface face, specified as a (m-1)-by-(n-1)-by-3 array, where `[m,n] = size(ZData)`. Specify one normal vector per face.

Specifying values for this property sets the associated mode to manual. If you do not specify normal vectors, then the surface generates this data for lighting calculations.

Data Types: `single` | `double`

`FaceNormalsMode` — Selection mode for `FaceNormals`

`'auto'` (default) | `'manual'`

Selection mode for `FaceNormals`, specified as one of these values:

- `'auto'` — Calculate the normal vectors based on the coordinate data.
- `'manual'` — Use manually specified values. To specify the values, set the `FaceNormals` property.

`VertexNormals` — Normal vectors for each surface vertex

`[ ]` (default) | m-by-n-by-3 array

Normal vectors for each surface vertex, specified as a m-by-n-by-3 array, where `[m,n] = size(ZData)`. Specify one normal vector per vertex.

Specifying values for this property sets the associated mode to manual. If you do not specify normal vectors, then the surface generates this data for lighting calculations.

Data Types: `single` | `double`

`VertexNormalsMode` — Selection mode for `VertexNormals`

`'auto'` (default) | `'manual'`

Selection mode for `VertexNormals`, specified as one of these values:

- `'auto'` — Calculate the normal vectors based on the coordinate data.
- `'manual'` — Use manually specified values. To specify the values, set the `VertexNormals` property.

Color and Transparency Mapping

`AlphaData` — Transparency data

1 (default) | array same size as `ZData`

Transparency data for each vertex, specified as an array the same size as the `ZData` property. After specifying the values, set the `FaceAlpha` and `EdgeAlpha` properties to control the type of transparency. If the `FaceAlpha` and `EdgeAlpha` properties are both set to scalar values, then the primitive surface does not use the `AlphaData` values.

The `AlphaDataMapping` property determines how the primitive surface interprets the `AlphaData` property values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`AlphaDataMapping` — Interpretation of `AlphaData` values

`'scaled'` (default) | `'direct'` | `'none'`

Interpretation of `AlphaData` values, specified as one of these values:

- `'none'` — Interpret the values as transparency values. A value of 1 or greater is completely opaque, a value of 0 or less is completely transparent, and a value between 0 and 1 is semitransparent.
- `'scaled'` — Map the values into the figure's alphamap. The minimum and maximum alpha limits of the axes determine the `AlphaData` values that map to the first and last elements in the alphamap, respectively. For example, if the alpha limits are `[3 5]`, then values of `3` or less map to the first element in the alphamap. Values of `5` or greater map to the last element in the alphamap. The ALim property of the axes contains the alpha limits. The Alphamap property of the figure contains the alphamap.
- `'direct'` — Interpret the values as indices into the figure's alphamap. Values with a decimal portion are fixed to the nearest lower integer.
  - If the values are of type `double` or `single`, then values of 1 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap.
  - If the values are of integer type, then values of 0 or less map to the first element in the alphamap. Values equal to or greater than the length of the alphamap map to the last element in the alphamap (or up to the range limits of the type). The integer types are `uint8`, `uint16`, `uint32`, `uint64` , `int8`, `int16`, `int32`, and `int64`.
  - If the values are of type `logical`, then values of 0 map to the first element in the alphamap and values of 1 map to the second element in the alphamap.

`CData` — Vertex colors

2-D or 3-D array

Vertex colors, specified in one of these forms:

- 2-D array — Use colormap colors. Specify a color for each vertex by setting `CData` to an array the same size as `ZData`. The `CDataMapping` property determines how these values map into the current colormap. If the `FaceColor` property is set to `'texturemap'`, then `CData` does not need to be the same size as `ZData`. However, it must be of type `double` or `uint8`. The `CData` values map to conform to the surface defined by `ZData`.

- 3-D array — Use true colors. Specify an RGB triplet color for each vertex by setting `CData` to an m-by-n-by-3 array where `[m,n] = size(ZData)`. An RGB triplet is a three-element vector that specifies the intensities of the red, green, and blue components of a color. The first page of the array contains the red components, the second the green components, and the third the blue components of the colors. Since the surface uses true colors instead of colormap colors, the `CDataMapping` property has no effect.

  - If `CData` is of type `double` or `single`, then an RGB triplet value of `[0 0 0]` corresponds to black and `[1 1 1]` corresponds to white.
  - If `CData` is an integer type, then the surface uses the full range of data to determine the color. For example, if `CData` is of type `uint8`, then `[0 0 0]` corresponds to black and `[255 255 255]` corresponds to white. If `CData` is of type `int8`, then `[-128 -128 -128]` corresponds to black and `[127 127 127]` corresponds to white.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`CDataMapping` — Direct or scaled colormapping

`'scaled'` (default) | `'direct'`

Direct or scaled colormapping, specified as one of these values:

- `scaled` — Transform the color data to span the portion of the colormap indicated by the axes `CLim` property, linearly mapping data values to colors. See the `caxis` reference page for more information on this mapping.
- `direct` — Use the color data as indices directly into the colormap. The color data should then be integer values ranging from 1 to `length(colormap)`. MATLAB maps values less than 1 to the first color in the colormap, and values greater than `length(colormap)` to the last color in the colormap. Values with a decimal portion are fixed to the nearest lower integer.

`CDataMode` — Selection mode for `CData`

`'auto'` (default) | `'manual'`

Selection mode for `CData`, specified as one of these values:

- `'auto'` — Use the `ZData` values to set the colors.
- `'manual'` — Use manually specified values. To specify the values, set the `CData` property.

Lighting

`AmbientStrength` — Strength of ambient light

`0.3` (default) | scalar in range `[0,1]`

Strength of ambient light, specified as a scalar value in the range `[0,1]`. Ambient light is a nondirectional light that illuminates the entire scene. There must be at least one visible light object in the axes for the ambient light to be visible.

The AmbientLightColor property for the axes sets the color of the ambient light. The color is the same for all objects in the axes.

Example: `0.5`

Data Types: `double`

`DiffuseStrength` — Strength of diffuse light

`0.6` (default) | scalar in range `[0,1]`

Strength of diffuse light, specified as a scalar value in the range `[0,1]`. Diffuse light is the nonspecular reflectance from light objects in the axes.

Example: `0.3`

Data Types: `double`

`SpecularColorReflectance` — Color of specular reflections

1 (default) | scalar in range `[0,1]`

Color of specular reflections, specified as a scalar value in the range `[0,1]`. A value of `1` sets the color using only the color of the light source. A value of `0` sets the color using both the color of the object from which it reflects and the color of the light source. The Color property of the light contains the color of the light source. The proportions vary linearly for values in between.

Example: `0.5`

Data Types: `double`

`SpecularExponent` — Size of specular spot

10 (default) | scalar greater than or equal to 1

Size of specular spot, specified as a scalar value greater than or equal to 1. Most materials have exponents in the range `[5 20]`.

Example: 7

Data Types: `double`

`SpecularStrength` — Strength of specular reflection

`0.9` (default) | scalar in range `[0,1]`

Strength of specular reflection, specified as a scalar value in the range `[0,1]`. Specular reflections are the bright spots on the surface from light objects in the axes.

Example: `0.3`

Data Types: `double`

Data

`XData` — *x*-coordinate data

vector or matrix

x-coordinate data specified as a matrix that is the same size as ZData or a vector of `length(n)`, where `[m,n] = size(ZData)`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`YData` — *y*-coordinate data

vector or matrix

y-coordinate data specified as a matrix that is the same size as ZData or a vector of `length(m)`, where `[m,n] = size(ZData)`.

Example:

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ZData` — *z*-coordinate data

matrix

z-coordinate data specified as a matrix.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`XDataMode` — Selection mode for `XData`

`'auto'` | `'manual'`

Selection mode for `XData`, specified as one of these values:

- `'auto'` — Use the column indices of `ZData`.
- `'manual'` — Use manually specified value. To specify the value, pass an input argument to the plotting function or directly set the `XData` property.

`YDataMode` — Selection mode for `YData`

`'auto'` | `'manual'`

Selection mode for `YData`, specified as one of these values:

- `'auto'` — Use the row indices of `ZData`.
- `'manual'` — Use manually specified value. To specify the value, pass an input argument to the plotting function or directly set the `YData` property.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`Type` — Type of graphics object
`'surface'`

This property is read-only.

Type of graphics object, returned as `'surface'`

`UserData` — Data to associate with the object
`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label
`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend
`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).

- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see “Callback Definition”.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Primitive Surface` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `Primitive Surface` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'` and you can click a part of the `Primitive Surface` object that has no color. The `HitTest` property determines if the `Primitive Surface` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Primitive Surface` object passes the click through it to the object below it in the current view of the figure window. The `HitTest` property has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Primitive Surface` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Primitive Surface` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Primitive Surface` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Primitive Surface` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

`Interruptible` — Callback interruption
`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Primitive Surface` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`pcolor` | `surface`

Topics

"Access Property Values"
"Graphics Object Properties"

save

Save workspace variables to file

Syntax

```
save(filename)
save(filename,variables)
save(filename,variables,fmt)

save(filename,variables,version)
save(filename,variables,version,'-nocompression')
save(filename,variables,'-append')
save(filename,variables,'-append','-nocompression')

save filename
```

Description

`save(filename)` saves all variables from the current workspace in a MATLAB formatted binary file (MAT-file) called `filename`. If `filename` exists, `save` overwrites the file.

`save(filename,variables)` saves only the variables or fields of a structure array specified by `variables`.

`save(filename,variables,fmt)` saves in the file format specified by `fmt`. The `variables` argument is optional. If you do not specify `variables`, the `save` function saves all variables in the workspace.

`save(filename,variables,version)` saves to the MAT-file version specified by `version`. The `variables` argument is optional.

`save(filename,variables,version,'-nocompression')` saves the variables to the MAT-file without compression. The `'-nocompression'` flag only supports MAT-file Version 7.3. Therefore, you must specify `version` as `'-v7.3'`. The `variables` argument is optional.

`save(filename,variables,'-append')` adds new variables to an existing file. If a variable already exists in a MAT-file, then `save` overwrites it with the value in the workspace.

For ASCII files, `'-append'` adds data to the end of the file.

To append to a Version 6 MAT-file, you must also include `'-v6'` as an input argument.

`save(filename,variables,'-append','-nocompression')` adds new variables to an existing file without compression. The existing file must be a MAT-file Version 7.3.

`save filename` is the command form of the syntax. Command form requires fewer special characters. You do not need to type parentheses or enclose the input in single or double quotes. Separate inputs with spaces instead of commas.

For example, to save a file named `test.mat`, these statements are equivalent:

```
save test.mat      % command form
save('test.mat')   % function form
```

You can include any of the inputs described in previous syntaxes. For example, to save the variable named `X`:

```
save test.mat X       % command form
save('test.mat','X')  % function form
```

Do not use command form when any of the inputs, such as `filename`, are variables.

Examples

Save All Workspace Variables to MAT-File

Save all variables from the workspace in a binary MAT-file, `test.mat`. If `filename` is a variable, use function syntax.

```
filename = 'test.mat';
save(filename)
```

Otherwise, you also can use command syntax.

```
save test.mat
```

Remove the variables from the workspace, and then retrieve the data with the `load` function.

```
clear
load('test.mat')
```

Save Specific Variables to MAT-File

Create and save two variables, p and q, to a file called pqfile.mat.

```
p = rand(1,10);
q = ones(10);
save('pqfile.mat','p','q')
```

MATLAB® saves the variables to the file, pqfile.mat, in the current folder.

You also can use command syntax to save the variables, p and q.

```
save pqfile.mat p q
```

Save Data to ASCII File

Create two variables, save them to an ASCII file, and then view the contents of the file.

```
p = rand(1,10);
q = ones(10);
save('pqfile.txt','p','q','-ascii')
type('pqfile.txt')
```

The type function displays the contents of the file.

Alternatively, use command syntax for the save operation.

```
save pqfile.txt p q -ascii
```

Save Structure Fields as Individual Variables

Create a structure, s1, that contains three fields, a, b, and c.

```
s1.a = 12.7;
s1.b = {'abc',[4 5; 6 7]};
s1.c = 'Hello!';
```

Save the fields of structure s1 as individual variables in a file called newstruct.mat.

```
save('newstruct.mat','-struct','s1');
```

Check the contents of the file using the whos function.

```
disp('Contents of newstruct.mat:')
```

```
Contents of newstruct.mat:
```

```
whos('-file','newstruct.mat')
```

```
  Name      Size            Bytes  Class     Attributes

  a         1x1                 8  double
  b         1x2               262  cell
  c         1x6                12  char
```

Save Variables to Version 7.3 MAT-File

Create two variables and save them to a Version 7.3 MAT-file called `example.mat`.

```
A = rand(5);
B = magic(10);
save('example.mat','A','B','-v7.3')
```

You also can use command syntax for the `save` operation.

```
save example.mat A B -v7.3
```

Save Variables to Version 7.3 MAT-File Without Compression

Create two variables and save them, without compression, to a Version `7.3` MAT-file called `myFile.mat`.

```
A = rand(5);
B = magic(10);
save('myFile.mat','A','B','-v7.3','-nocompression')
```

Alternatively, use the command syntax for the `save` operation.

```
save myFile.mat A B -v7.3 -nocompression
```

The `'-nocompression'` flag faciliates a faster save for those variables that are larger than `2` GB or those that do not benefit from compression.

Append Variable to MAT-File

Save two variables to a MAT-file. Then, append a third variable to the same file.

```
p = rand(1,10);
q = ones(10);
```

```
save('test.mat','p','q')
```

View the contents of the MAT-file.

```
whos('-file','test.mat')
```

```
  Name       Size            Bytes  Class     Attributes

  p          1x10               80  double
  q         10x10              800  double
```

Create a new variable, a, and append it to the MAT-file.

```
a = 50;
save('test.mat','a','-append')
```

View the contents of the MAT-file.

```
whos('-file','test.mat')
```

```
  Name       Size            Bytes  Class     Attributes

  a          1x1                 8  double
  p          1x10               80  double
  q         10x10              800  double
```

The variable, a, is appended to `test.mat`, without overwriting the previous variables, p and q.

Note: To append to a Version 6 MAT-file, specify both `'-v6'` and `'-append'`. For example, to save variable a to the file, `test.mat`, call:

```
save('test.mat','a','-v6','-append')
```

Append Variable to MAT-File Without Compression

Save two variables to a MAT-file. Then, append a third variable, without compression, to the same file.

Create two variables A and B and save them to a MAT-file Version `7.3`. By default, the `save` function compresses variables A and B before saving them to `myFile.mat`.

```
A = rand(5);
B = magic(10);
```

```
save('myFile.mat','A','B','-v7.3')
```

View the contents of the MAT-file.

```
whos('-file','myFile.mat')
```

```
  Name       Size            Bytes  Class     Attributes

  A          5x5               200  double
  B         10x10              800  double
```

Create a new variable `C` and append it, without compression, to `myFile.mat`.

```
C = 5;
save('myFile.mat','C','-append','-nocompression')
```

View the contents of the MAT-file.

```
whos('-file','myFile.mat')
```

```
  Name       Size            Bytes  Class     Attributes

  A          5x5               200  double
  B         10x10              800  double
  C          1x1                 8  double
```

Input Arguments

`filename` — Name of file

`'matlab.mat'` (default) | character vector | string

Name of file, specified as a character vector or string. If you do not specify `filename`, the `save` function saves to a file named `matlab.mat`.

If `filename` has no extension (that is, no period followed by text), and the value of `format` is not specified, then MATLAB appends `.mat`. If `filename` does not include a full path, MATLAB saves to the current folder. You must have permission to write to the file.

When using the command form of `save`, it is unnecessary to enclose the input in single or double quotes. However, if `filename` contains a space, you must enclose the argument in single quotes. For example, `save 'filename withspace.mat'`.

Example: `'myFile.mat'`

Data Types: `char` | `string`

`variables` — Names of variables to save

character vector | string

Names of variables to save, specified as one or more character vectors or strings. When using the command form of `save`, you do not need to enclose the input in single or double quotes. `variables` can be in one of the following forms.

Form of `variables` Input	Variables to Save
`var1,...,varN`	Save the listed variables, specified as individual character vectors or strings. Use the `'*'` wildcard to match patterns. For example, `save('filename.mat','A*')` saves all variables in the file that start with `A`.
`'-regexp',`*`expr1,...,exprN`*	Save only the variables whose names match the regular expressions, specified as character vectors or strings. For example, `save('filename.mat','-regexp','^Mon','^Tues')` saves only the variables in the file whose names begin with `Mon` or `Tues`.
`'-struct',`*`structName`*	Store the fields of the scalar structure specified by *`structName`* as individual variables in the file. For example, `save('filename.mat','-struct','S')` saves the scalar structure, `S`.
`'-struct',`*`structName,field1,...,`*	Store the specified fields of the specified scalar structure as individual variables in the file. For example, `save('filename.mat,'-struct','S','a','b')` saves the fields `S.a` and `S.b`.
`'-struct',`*`structName`*`,'-regexp',`*`expr1,...,exprN`*	Store only the fields whose names match the regular expressions, specified as character vectors or strings.

Data Types: `char` | `string`

fmt — File format

`'-mat'` (default) | `'-ascii'` | `'-ascii','-tabs'` | `'-ascii','-double'` | `'-ascii','-double','-tabs'`

File format, specified as one of the following. When using the command form of `save`, you do not need to enclose the input in single or double quotes, for example, `save myFile.txt -ascii -tabs`.

Value of `fmt`	File Format
`'-mat'`	Binary MAT-file format.
`'-ascii'`	Text format with 8 digits of precision.
`'-ascii','-tabs'`	Tab-delimited text format with 8 digits of precision.
`'-ascii','-double'`	Text format with 16 digits of precision.
`'-ascii','-double','-tabs'`	Tab-delimited text format with 16 digits of precision.

For MAT-files, data saved on one machine and loaded on another machine retains as much accuracy and range as the different machine floating-point formats allow.

Use one of the text formats to save MATLAB numeric values to text files. In this case:

- Each variable must be a two-dimensional `double` array.
- The output includes only the real component of complex numbers.
- MATLAB writes data from each variable sequentially to the file. If you plan to use the `load` function to read the file, all variables must have the same number of columns. The `load` function creates a single variable from the file.

If you specify a text format and any variable is a two-dimensional character array, then MATLAB translates characters to their corresponding internal ASCII codes. For example, `'abc'` appears in a text file as:

```
9.7000000e+001   9.8000000e+001   9.9000000e+001
```

Data Types: `char` | `string`

version — MAT-file version

`'-v7.3'` | `'-v7'` | `'-v6'` | `'-v4'`

MAT-file version, specified as one of the following. When using the command form of `save`, you do not need to enclose the input in single or double quotes.

Value of `version`	Loads in MATLAB Versions	Supported Features	Compression	Maximum Size of Each Variable
`'-v7.3'`	7.3 (R2006b) or later	Saving and loading parts of variables, and all Version 7 features. Version 7.3 also supports saving variables without compression using the `'-nocompression'` option.	Yes (default)	≥ 2 GB on 64-bit computers
`'-v7'`	7.0 (R14) or later	Unicode character encoding, which enables file sharing between systems that use different default character encoding schemes, and all Version 6 features.	Yes	2^31 bytes per variable
`'-v6'`	5 (R8) or later	N-dimensional arrays, cell arrays, structure arrays, variable names longer than 19 characters, and all Version 4 features.	No	2^31 bytes per variable
`'-v4'`	All	Two-dimensional `double`, character, and sparse arrays.	No	100,000,000 elements per array, and 2^31 bytes per variable

If any data items require features that the specified version does not support, MATLAB does not save those items and issues a warning. You cannot specify a version later than your current version of MATLAB software.

Note: Version 7.3 MAT-files use an HDF5 based format that requires some overhead storage to describe the contents of the file. For cell arrays, structure arrays, or other

containers that can store heterogeneous data types, Version 7.3 MAT-files are sometimes larger than Version 7 MAT-files.

To view or set the default version for MAT-files, select a **MAT-file save format** option in the General Preferences.

Tips

- For more flexibility in creating ASCII files, use `dlmwrite` or `fprintf`.
- Saving graphics objects with the `save` function can result in a large file since the file contains all the information required to regenerate the object.
- Avoid saving figures with the `save` function. Use the `savefig` function instead. Using `save` to save a figure in R2014b or later makes MAT-file inaccessible in earlier versions of MATLAB. If you use `save` to save a figure, then the function displays a warning message. Delete any figures before using `save`. Keep in mind that the figures might not be directly in your workspace. For example, they might be stored in a structure or in the workspace of a callback function.

See Also

See Also

`clear` | `hgsave` | `load` | `matfile` | `regexp` | `saveas` | `whos`

Topics

"Create and Edit Variables"
"Save and Load Workspace Variables"
"Write to Delimited Data Files"
"Regular Expressions"

Introduced before R2006a

save (COM)

Serialize control object to file

Syntax

```
save(h,'filename')
```

Description

`save(h,'filename')` saves COM control object `h` to file specified by `filename`.

Note The COM `save` function is only supported for controls.

Examples

Create an `mwsamp` control and save its original state to the file `mwsample`.

```
f = figure('position',[100 200 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],f);
save(h,'mwsample')
```

Alter the figure by changing its label and the radius of the circle.

```
h.Label = 'Circle';
h.Radius = 50;
Redraw(h)
```

Restore the control to its original state using the `load` function.

```
load(h,'mwsample')
get(h)
```

```
ans =
     Label: 'Label'
    Radius: 20
```

Tips

COM functions are available on Microsoft Windows systems only.

See Also

`load (COM)` | `delete (COM)` | `actxcontrol` | `actxserver` | `release`

Introduced before R2006a

save (serial)

Save serial port objects and variables to file

Syntax

```
save filename
save filename obj1 obj2...
```

Description

`save filename` saves all MATLAB variables to the file `filename`. If an extension is not specified for `filename`, then the `.mat` extension is used.

`save filename obj1 obj2...` saves the serial port objects `obj1 obj2...` to the file `filename`.

Examples

This example illustrates how to use the command and functional form of `save` on a Windows platform.

```
s = serial('COM1');
set(s,'BaudRate',2400,'StopBits',1)
save MySerial1 s
set(s,'BytesAvailableFcn',@mycallback)
save('MySerial2','s')
```

Tips

You can use `save` in the functional form as well as the command form shown above. When using the functional form, you must specify the filename and serial port objects as strings. For example. to save the serial port object `s` to the file `MySerial.mat` on a Windows platform

```
s = serial('COM1');
```

```
save('MySerial','s')
```

Any data that is associated with the serial port object is not automatically stored in the file. For example, suppose there is data in the input buffer for `obj`. To save that data to a file, you must bring it into the MATLAB workspace using one of the synchronous read functions, and then save to the file using a separate variable name. You can also save data to a text file with the `record` function.

You return objects and variables to the MATLAB workspace with the `load` command. Values for read-only properties are restored to their default values upon loading. For example, the `Status` property is restored to `closed`. To determine if a property is read-only, examine its reference pages.

See Also

`load` | `record` | `Status`

Introduced before R2006a

saveas

Save figure to specific file format

Syntax

```
saveas(fig,filename)
saveas(fig,filename,formattype)
```

Description

`saveas(fig,filename)` saves the figure or Simulink block diagram specified by `fig` to file `filename`. Specify the file name as a character vector that includes a file extension, for example, `'myplot.jpg'`. The file extension defines the file format. If you do not specify an extension, then `saveas` saves the figure to a FIG-file.To save the current figure, specify `fig` as `gcf`.

`saveas(fig,filename,formattype)` creates the file using the specified file format, `formattype`. If you do not specify a file extension in the file name, for example, `'myplot'`, then the standard extension corresponding to the specified format automatically appends to the file name. If you specify a file extension, it does not have to match the format. `saveas` uses `formattype` for the format, but saves the file with the specified extension. Thus, the file extension might not match the actual format used.

Examples

Save Figure as PNG File

Create a bar chart and save it as a PNG file.

```
x = [2 4 7 2 4 5 2 5 1 4];
bar(x);
saveas(gcf,'Barchart.png')
```

Save Figure as EPS File

Create a bar chart and save it as an EPS file. Specify the `'epsc'` driver to save it in color.

```
x = [2 4 7 2 4 5 2 5 1 4];
bar(x);
saveas(gcf,'Barchart','epsc')
```

`saveas` saves the bar chart as `Barchart.eps`.

Save Simulink Block Diagram as BMP File

Save a Simulink block diagram named `'sldemo_tank'` as a BMP file. Use `get_param` to get the handle of the diagram. You must have Simulink installed to run this code.

```
sldemo_tank
fig = get_param('sldemo_tank','Handle');
saveas(fig,'MySimulinkDiagram.bmp');
```

- "Save Figure to Open in Another Application"

Input Arguments

`fig` — Figure to save

figure object | Simulink block diagram

Figure to save, specified as a figure object or a Simulink block diagram. If you specify other types of graphics objects, such as an axes, then `saveas` saves the parent figure to the object. This means that `saveas` cannot save a subplot without also saving all subplots in the parent figure.

Example: `saveas(gcf,'MyFigure.png')`

To save a Simulink block diagram, use `get_param` to get the handle of the diagram. For example, save a block diagram named `'sldemo_tank'`.

```
sldemo_tank
saveas(get_param('sldemo_tank','Handle'),'MySimulinkDiagram.bmp');
```

`filename` — File name

character vector

File name, specified as a character vector with or without a file extension.

Example: `'Bar Chart'`

Example: `'Bar Chart.png'`

If you specify a file extension, then `saveas` uses the associated format. If you specify a file extension and additionally specify the `formattype` input argument, then `saveas` uses `formattype` for the format and saves the file with the specified file name. Thus, the file extension might not match the actual format used.

You can specify any extension corresponding to a file format. This table lists some common file extensions.

Extension	Resulting Format
`.fig`	MATLAB FIG-file (invalid for Simulink block diagrams)
`.m`	MATLAB FIG-file and MATLAB code that opens figure (invalid for Simulink block diagrams)
`.jpg`	JPEG image
`.png`	Portable Network Graphics
`.eps`	EPS Level 3 Black and White
`.pdf`	Portable Document Format
`.bmp`	Windows bitmap
`.emf`	Enhanced metafile
`.pbm`	Portable bitmap
`.pcx`	Paintbrush 24-bit
`.pgm`	Portable Graymap
`.ppm`	Portable Pixmap
`.tif`	TIFF image, compressed

`formattype` — File format

`'fig'` | `'m'` | `'mfig'` | bitmap image file format | vector graphics file format

File format, specified as one of these options:

- `'fig'` — Save the figure as a MATLAB figure file with the `.fig` extension. To open figures saved with the `.fig` extension, use the `openfig` function. This format is not valid for Simulink block diagrams.

- `'m'` or `'mfig'` — Save the figure as a MATLAB figure file and additionally create a MATLAB file that opens the figure. To open the figure, run the MATLAB file. This option is not valid for Simulink block diagrams.
- Bitmap image file format — Specify the format as one of the bitmap image options in the table, Bitmap Image Formats.
- Vector graphics file format — Specify the format as one of the vector graphics options in the table, Vector Graphics Formats.

Bitmap Image File

Bitmap images contain a pixel-based representation of the figure. The size of the generated file depends on the figure, the format, and your system resolution. Bitmap images are widely used by web browsers and other applications that display graphics. However, they do not scale well and you cannot modify individual graphics objects (such as lines and text) in other graphics applications.

Bitmap Image Formats

Option	Format	Default File Extension
`'jpeg'`	JPEG 24-bit	`.jpg`
`'png'`	PNG 24-bit	`.png`
`'tiff'`	TIFF 24-bit (compressed)	`.tif`
`'tiffn'`	TIFF 24-bit (not compressed)	`.tif`
`'meta'`	Enhanced metafile (Windows only)	`.emf`
`'bmpmono'`	BMP Monochrome	`.bmp`
`'bmp'`	BMP 24-bit	`.bmp`
`'bmp16m'`	BMP 24-bit	`.bmp`
`'bmp256'`	BMP 8-bit (256 color, uses a fixed colormap)	`.bmp`
`'hdf'`	HDF 24-bit	`.hdf`
`'pbm'`	PBM (plain format) 1-bit	`.pbm`
`'pbmraw'`	PBM (raw format) 1-bit	`.pbm`

Option	Format	Default File Extension
`'pcxmono'`	PCX 1-bit	`.pcx`
`'pcx24b'`	PCX 24-bit color (three 8-bit planes)	`.pcx`
`'pcx256'`	PCX 8-bit newer color (256 color)	`.pcx`
`'pcx16'`	PCX older color (EGA/VGA 16-color)	`.pcx`
`'pgm'`	PGM (plain format)	`.pgm`
`'pgmraw'`	PGM (raw format)	`.pgm`
`'ppm'`	PPM (plain format)	`.ppm`
`'ppmraw'`	PPM (raw format)	`.ppm`

Vector Graphics File

Vector graphics files store commands that redraw the figure. This type of format scales well, but can result in a large file. In some cases, a vector graphics format might not produce the correct 3-D arrangement of objects. Some applications support extensive editing of vector graphics formats, but others do not support editing beyond resizing the graphic. The best practice is to make all the necessary changes while your figure is still in MATLAB.

Typically, `saveas` uses the Painters renderer when generating vector graphics files. For some complex figures, `saveas` uses the OpenGL renderer instead. If it uses the OpenGL renderer, then the vector graphics file contains an embedded image, which might limit the extent to which you can edit the image in other applications. To ensure that `saveas` uses the Painters renderer, set the Renderer property for the figure to `'painters'`.

If you set the Renderer property for the figure, then `saveas` uses that renderer. Otherwise, it chooses the appropriate renderer. However, if `saveas` chooses a renderer that differs from the renderer used for the figure on the display, then some details of the saved figure can differ from the displayed figure. If necessary, you can make the displayed figure and the saved figure use the same renderer by setting the Renderer property for the figure.

Vector Graphics Formats

Option	Format	Default File Extension
`'pdf'`	Full page Portable Document Format (PDF) color	`.pdf`
`'eps'`	Encapsulated PostScript (EPS) Level 3 black and white	`.eps`
`'epsc'`	Encapsulated PostScript (EPS) Level 3 color	`.eps`
`'eps2'`	Encapsulated PostScript (EPS) Level 2 black and white	`.eps`
`'epsc2'`	Encapsulated PostScript (EPS) Level 2 color	`.eps`
`'meta'`	Enhanced Metafile (Windows only)	`.emf`
`'svg'`	SVG (scalable vector graphics)	`.svg`
`'ps'`	Full-page PostScript (PS) Level 3 black and white	`.ps`
`'psc'`	Full-page PostScript (PS) Level 3 color	`.ps`
`'ps2'`	Full-page PostScript (PS) Level 2 black and white	`.ps`
`'psc2'`	Full-page PostScript (PS) Level 2 color	`.ps`

Note: Only PDF and PS formats use the `PaperOrientation` property of the figure and the `left` and `bottom` elements of the `PaperPosition` property. Other formats ignore these values.

Definitions

Compatibility Considerations

Starting in R2016a, saved figures match the size of the figure on the screen by default. Previously, saved figures were 8-by-6 inches by default.

Tips

- To control the size or resolution when you save a figure, use the `print` function instead.
- The `saveas` function and the **Save As** dialog box (accessed from the **File** menu) do not produce identical results. The **Save As** dialog box produces images at screen resolution and at screen size. The `saveas` function uses a resolution of 150 DPI and uses the PaperPosition and PaperPositionMode properties of the figure to determine the size of the image.
- Details of saved and printed figures can differ from the figure on the display. To get output that is more consistent with the display, see "Save Figure Preserving Background Color" and "Save Figure at Specific Size and Resolution".

See Also

See Also

`open` | `print` | `savefig`

Topics

"Save Figure to Open in Another Application"

Introduced before R2006a

savefig

Save figure and contents to FIG-file

Syntax

```
savefig(filename)
savefig(H,filename)
savefig(H,filename,'compact')
```

Description

`savefig(filename)` saves the current figure to a FIG-file named *`filename`*`.fig`.

`savefig(H,filename)` saves the figures identified by the graphics array `H` to a FIG-file named *`filename`*`.fig`.

`savefig(H,filename,'compact')` saves the specified figures in a FIG-file that can be opened only in MATLAB R2014b or later releases. The `'compact'` option reduces the size of the `.fig` file and the time required to create the file.

Examples

Save Current Figure to FIG-File

Create a surface plot of the `peaks` function. Save the figure to the file `PeaksFile.fig`.

```
figure
surf(peaks)
savefig('PeaksFile.fig')
```

To open the saved figure, use the command:

```
openfig('PeaksFile.fig');
```

MATLAB creates a new figure using the saved `.fig` file.

Save Multiple Figures to FIG-File

Create two plots and store the figure handles in array `h`. Save the figures to the file `TwoFiguresFile.fig`. Close the figures after saving them.

```
h(1) = figure;
z = peaks;
surf(z)

h(2) = figure;
plot(z)

savefig(h,'TwoFiguresFile.fig')
close(h)
```

To open the two figures, use the command:

```
figs = openfig('TwoFiguresFile.fig');
```

`figs` contains the handles of the two figures created.

Save Figure Using `'compact'` Option

Save a figure using the compact option:

```
h = figure
surf(peaks)
savefig(h,'PeaksFile.fig','compact')
```

To open the figure, use the command:

```
openfig('PeaksFile.fig');
```

- "Save Figure to Open in Another Application"

Input Arguments

`H` — One or more figures

single figure | array of figures

One or more figures, specified as a single figure or an array of figures.

`filename` — File name

`'Untitled.fig'` (default) | character vector

File name, specified as a character vector. If you do not specify a file name, then MATLAB saves the file as `Untitled.fig`, which is the default.

If the specified file name does not include a `.fig` file extension, then MATLAB appends the extension. `savefig` does not accept other file extensions.

Example: `'ExampleFile.fig'`

`'compact'` — File format for R2014b or later releases

`'compact'`

File format for R2014b or later releases of MATLAB, specified as `'compact'`. This option results in smaller `.fig` files. However, do not use the `'compact'` option if you want to open the `.fig` file in versions of MATLAB before R2014b.

Tips

- You must use MATLAB to open files saved using `savefig`. To open the file, pass the file name to the function `openfig` or `open`. For example,

  ```
  openfig('ExampleFile.fig')
  ```
  opens the file, `ExampleFile.fig`, in MATLAB.
- `savefig` saves the full MATLAB figure. To save only part of a figure, such as an axes, or to save handles in addition to the data, use the `save` function to create a MAT-file.

See Also

See Also

`findobj` | `load` | `open` | `openfig` | `save`

Topics

"Save Figure to Open in Another Application"

Introduced in R2013b

saveobj

Modify save process for object

Syntax

```
b = saveobj(a)
```

Description

`b = saveobj(a)` is called by the `save` function if the class of `a` defines a `saveobj` method. `save` writes the returned value, `b`, to the MAT-file.

Define a `loadobj` method to take the appropriate action when loading the object.

If `A` is an array of objects, MATLAB invokes `saveobj` separately for each object saved.

Examples

Call the superclass `saveobj` method from the subclass implementation of `saveobj` with the following syntax:

```
classdef mySub < super
   methods
      function sobj = saveobj(obj)
         % Call superclass saveobj method
         sobj = saveobj@super(obj);
         % Perform subclass save operations
         ...
      end
   ...
   end
...
end
```

Update object when saved:

```
function b = saveobj(a)
```

```
   % If the object does not have an account number,
   % Add account number to AccountNumber property
   if isempty(a.AccountNumber)
      a.AccountNumber = getAccountNumber(a);
   end
   b = a;
end
```

Tutorials

- "Save and Load Process for Objects"

See Also

`save` | `load` | `loadobj`

Topics

"Save and Load Process for Objects"

Introduced before R2006a

savepath

Save current search path

Syntax

```
savepath
savepath folderName/pathdef.m
```

```
status = savepath( ___ )
```

Description

`savepath` saves the current MATLAB search path to an existing `pathdef.m` file in the current folder. If there is no `pathdef.m` file in the current folder, then `savepath` saves the search path to the first `pathdef.m` file on the current path. If there is no such file on the current path, then `savepath` saves the search path to the `pathdef.m` file that MATLAB located at startup.

On a Windows system with User Account Control (UAC) enabled, you might be prompted to allow the update operation because it requires administrator-level permission.

`savepath folderName/pathdef.m` saves the current search path to `pathdef.m` located in the folder specified by `folderName`. If you do not specify `folderName`, then `savepath` saves `pathdef.m` in the current folder.

Use this syntax if you do not have write access to the current `pathdef.m` file.

`status = savepath( ___ )` additionally indicates if the operation is successful, using any of the input arguments in the previous syntaxes. The `status` output is `0` when `savepath` is successful, and `1` otherwise.

Examples

Save Search Path to Specific Folder

Save the current search path to `pathdef.m` located in the folder, `I:/my_matlab_files`.

```
savepath I:/my_matlab_files/pathdef.m
```

Input Arguments

`folderName` — Folder name
character vector

Folder name, specified as a character vector

. `folderName` can be a relative or absolute path.

Example: `C:\myFolder`

Tips

- To display the paths to all `pathdef.m` files in the current folder and on the current search path, use `which`.

  ```
  which pathdef.m -all
  ```

  The `savepath` command updates the first `pathdef.m` file in this list.
- To save the search path programmatically each time you exit MATLAB, use `savepath` in a `finish.m` file.
- To save a search path and automatically use it in a future session, use the `savepath` *`folderName`*`/pathdef.m` syntax and set the folder specified by `folderName` as the MATLAB startup folder.

See Also

See Also
`addpath` | `finish` | `path` | `rmpath` | `userpath`

Topics
"What Is the MATLAB Search Path?"
"Running a Script When Exiting"

Introduced before R2006a

scatter

Scatter plot

Syntax

```
scatter(x,y)
scatter(x,y,sz)
scatter(x,y,sz,c)
scatter( ___ ,'filled')
scatter( ___ ,mkr)
scatter( ___ ,Name,Value)

scatter(ax, ___ )

s = scatter( ___ )
```

Description

`scatter(x,y)` creates a scatter plot with circles at the locations specified by the vectors `x` and `y`. This type of graph is also known as a bubble plot.

`scatter(x,y,sz)` specifies the circle sizes. To plot each circle with equal size, specify `sz` as a scalar. To plot each circle with a different size, specify `sz` as a vector with length equal to the length of `x` and `y`.

`scatter(x,y,sz,c)` specifies the circle colors. To plot all circles with the same color, specify `c` as a color name or an RGB triplet. To use varying color, specify `c` as a vector or a three-column matrix of RGB triplets.

`scatter( ___ ,'filled')` fills in the circles. Use the `'filled'` option with any of the input argument combinations in the previous syntaxes.

`scatter( ___ ,mkr)` specifies the marker type.

`scatter( ___ ,Name,Value)` modifies the scatter chart using one or more name-value pair arguments. For example, `'LineWidth',2` sets the marker outline width to 2 points.

`scatter(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes. The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`s = scatter( ___ )` returns the `Scatter` object. Use `s` to make future modifications to the scatter chart after it is created.

Examples

Create Scatter Plot

Create `x` as 200 equally spaced values between 0 and 3π. Create `y` as cosine values with random noise. Then, create a scatter plot.

```
x = linspace(0,3*pi,200);
y = cos(x) + rand(1,200);
scatter(x,y)
```

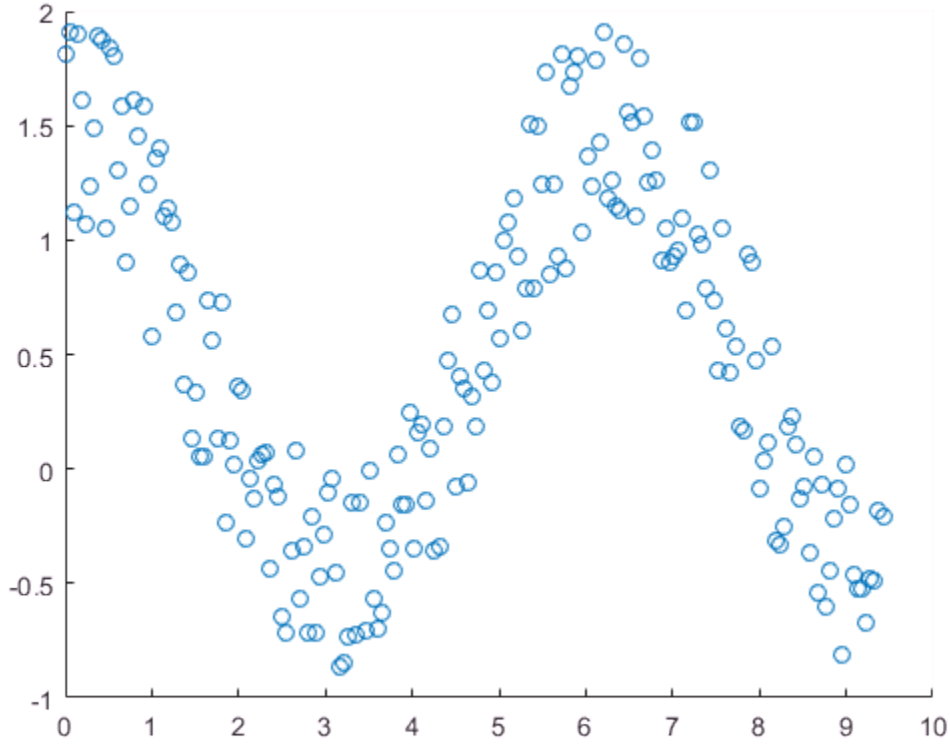

Vary Circle Size

Create a scatter plot using circles with different sizes. Specify the size in points squared

```
x = linspace(0,3*pi,200);
y = cos(x) + rand(1,200);
sz = linspace(1,100,200);
scatter(x,y,sz)
```

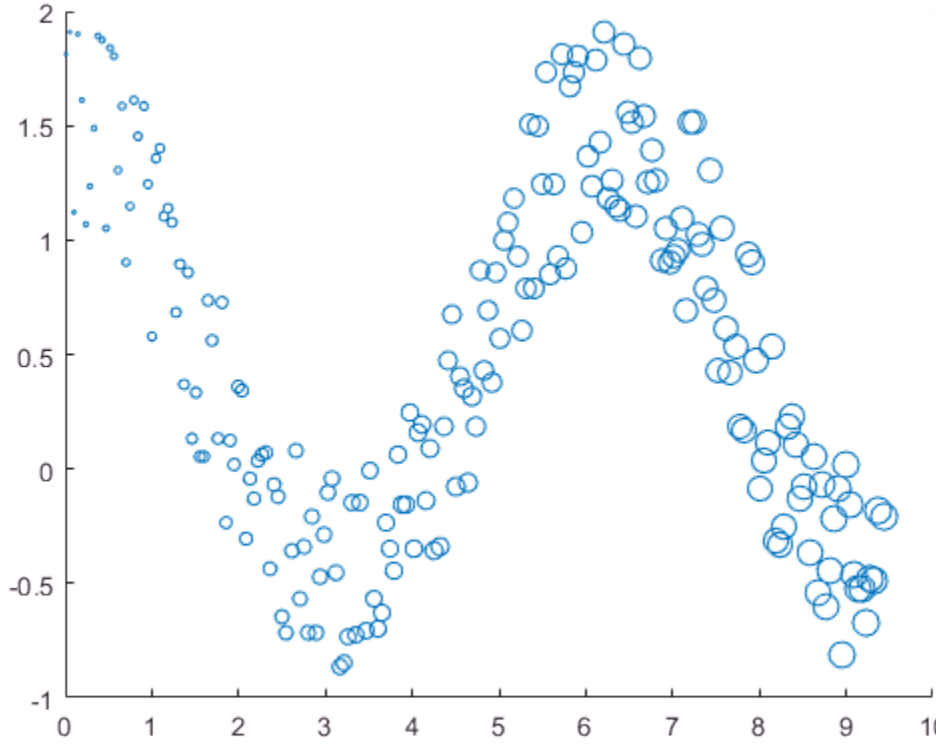

Corresponding elements in `x`, `y`, and `sz` determine the location and size of each circle. To plot all circles with the equal area, specify `sz` as a numeric scalar.

Vary Circle Color

Create a scatter plot and vary the circle color.

```
x = linspace(0,3*pi,200);
y = cos(x) + rand(1,200);
c = linspace(1,10,length(x));
scatter(x,y,[],c)
```

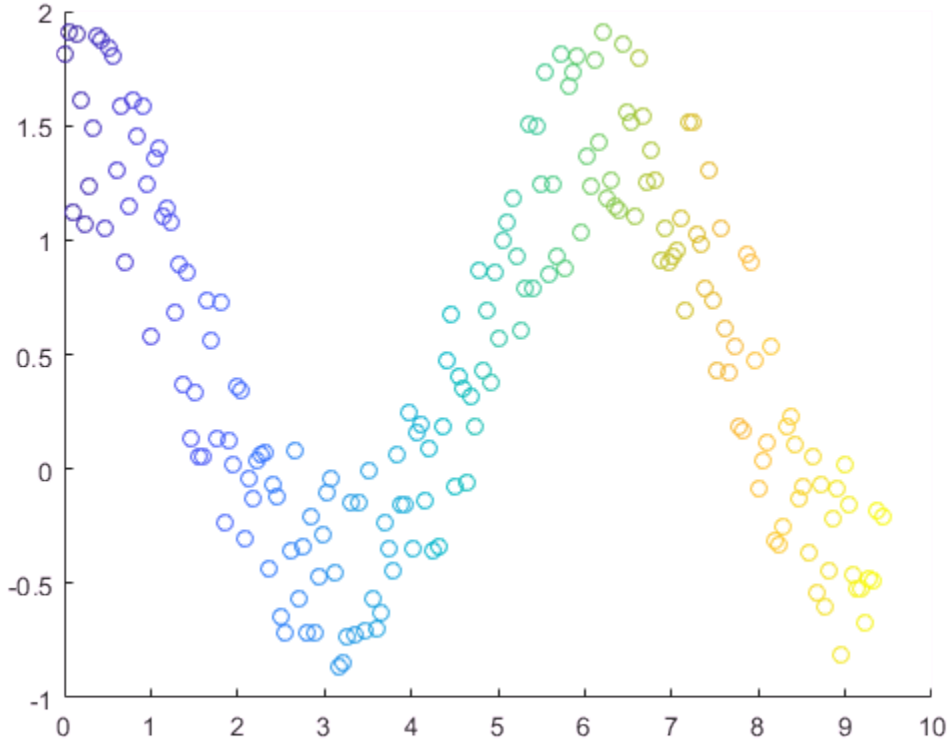

Corresponding elements in `x`, `y`, and `c` determine the location and color of each circle. The `scatter` function maps the elements in `c` to colors in the current colormap.

Fill the Markers

Create a scatter plot and fill in the markers. `scatter` fills each marker using the color of the marker edge.

```
x = linspace(0,3*pi,200);
y = cos(x) + rand(1,200);
sz = 25;
c = linspace(1,10,length(x));
scatter(x,y,sz,c,'filled')
```

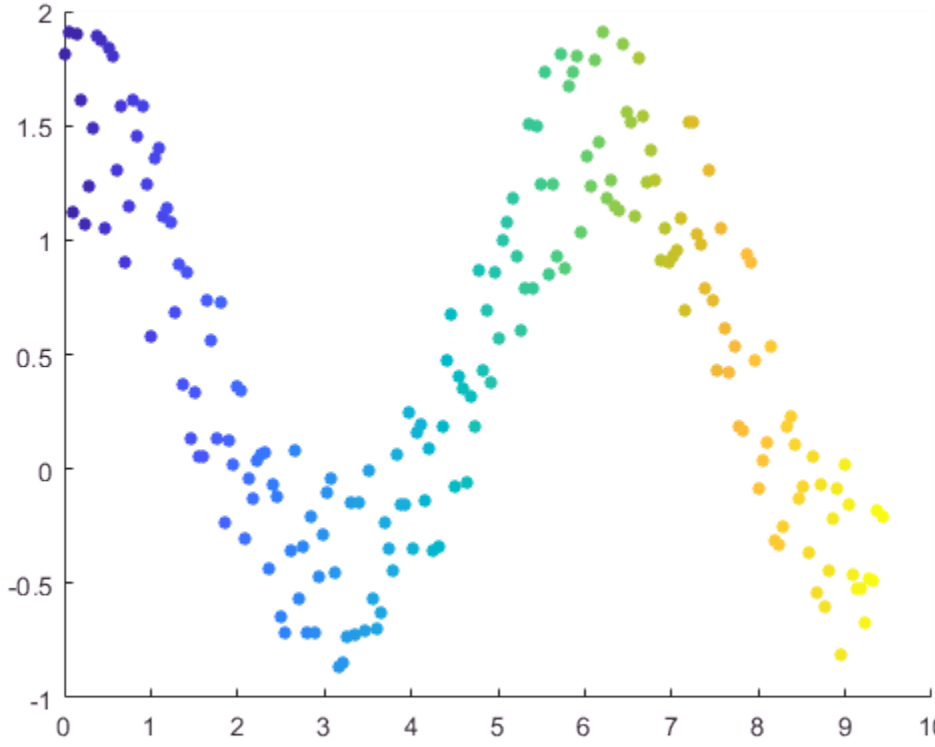

Specify Marker Symbol

Create vectors x and y as sine and cosine values with random noise. Then, create a scatter plot and use diamond markers with an area of 140 points squared.

```
theta = linspace(0,2*pi,150);
x = sin(theta) + 0.75*rand(1,150);
y = cos(theta) + 0.75*rand(1,150);
sz = 140;
scatter(x,y,sz,'d')
```

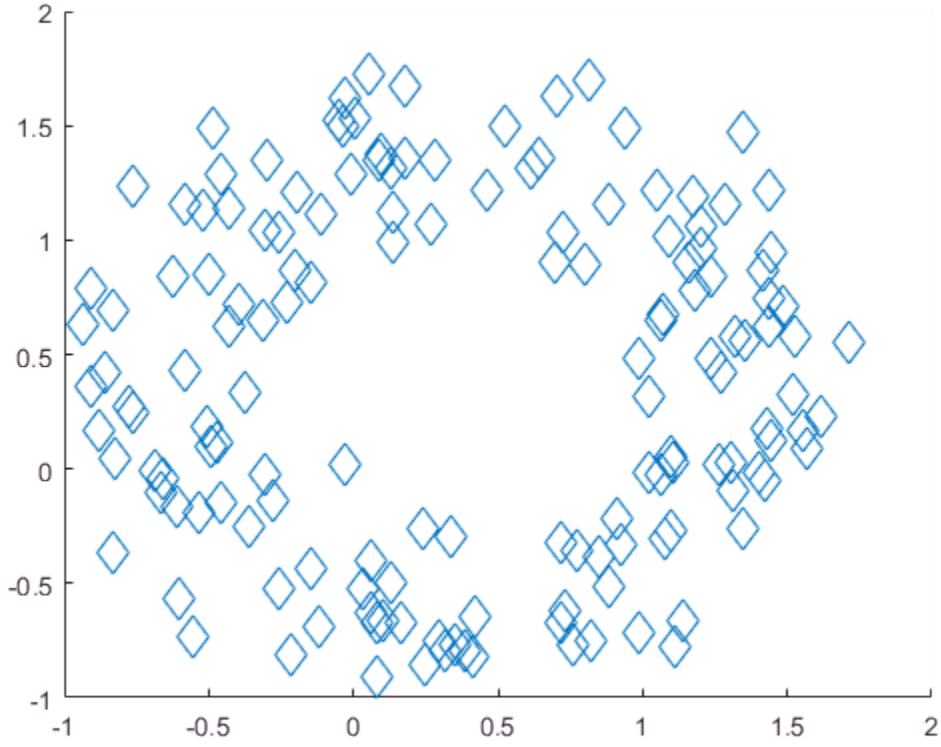

Change Marker Color and Line Width

Create vectors x and y as sine and cosine values with random noise. Create a scatter plot and set the marker edge color, marker face color, and line width.

```
theta = linspace(0,2*pi,300);
x = sin(theta) + 0.75*rand(1,300);
y = cos(theta) + 0.75*rand(1,300);
sz = 40;
scatter(x,y,sz,'MarkerEdgeColor',[0 .5 .5],...
              'MarkerFaceColor',[0 .7 .7],...
              'LineWidth',1.5)
```

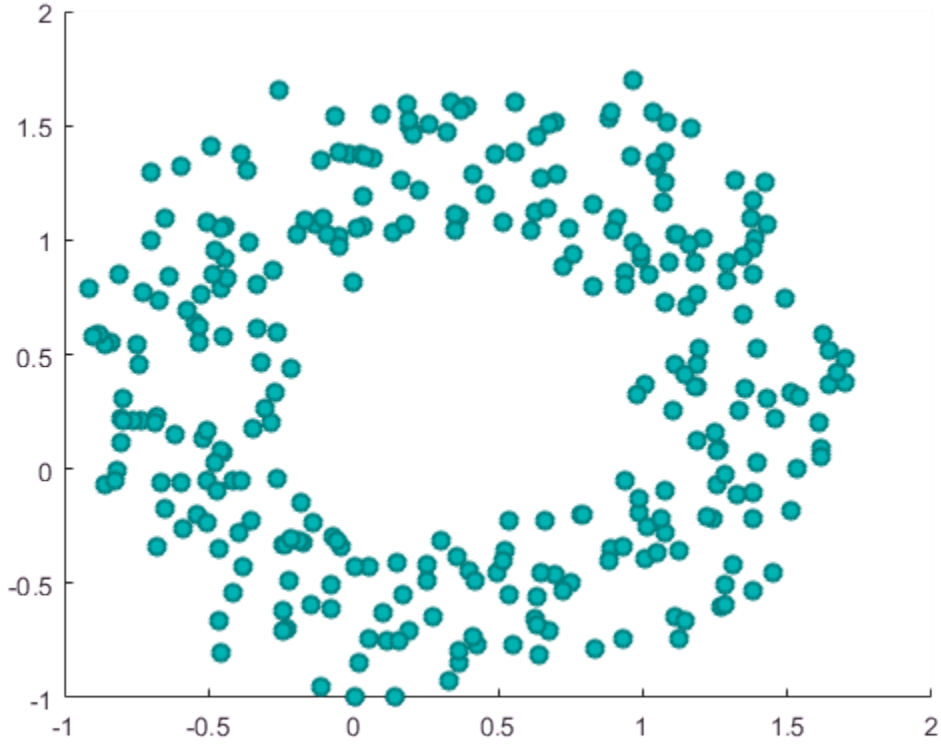

Specify Subplot for Scatter Plot

Create a figure with two subplots and add a scatter plot to each subplot. Use filled diamond markers for the scatter plot in the lower subplot.

```
x = linspace(0,3*pi,200);
y = cos(x) + rand(1,200);
ax1 = subplot(2,1,1);
scatter(ax1,x,y)

ax2 = subplot(2,1,2);
scatter(ax2,x,y,'filled','d')
```

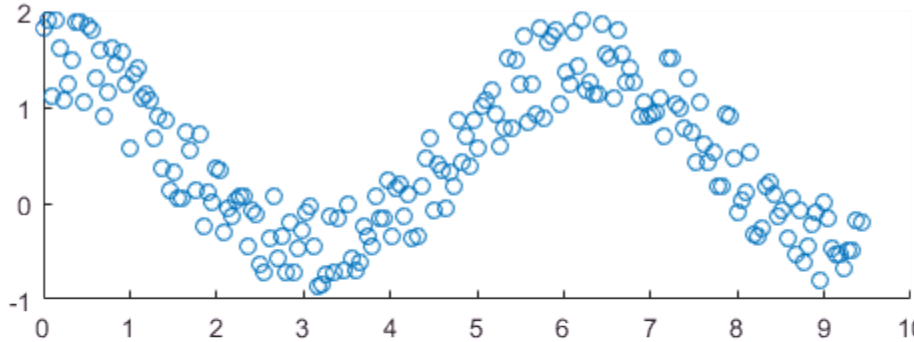

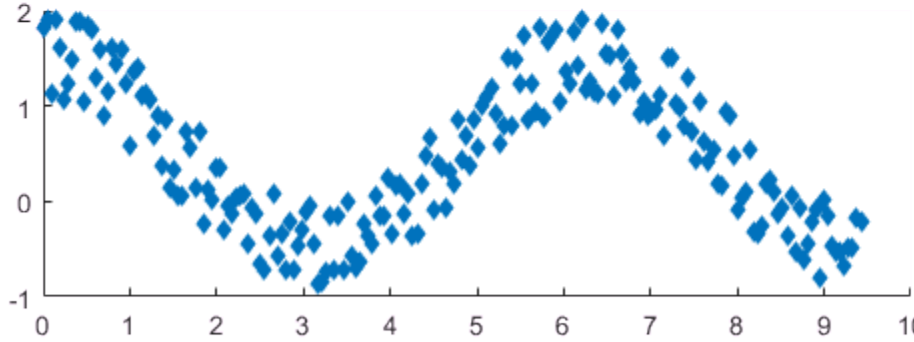

Modify Scatter Series After Creation

Create a scatter plot and return the scatter series object, `s`.

```
theta = linspace(0,1,500);
x = exp(theta).*sin(100*theta);
y = exp(theta).*cos(100*theta);
s = scatter(x,y);
```

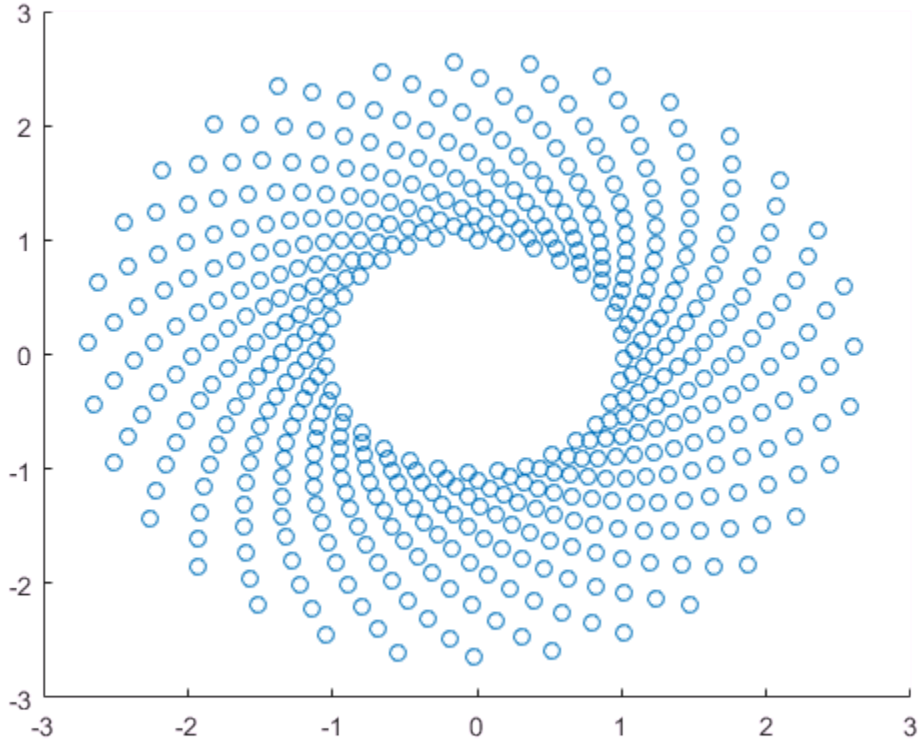

Use `s` to query and set properties of the scatter series after it has been created. Set the line width to `0.6` point. Set the marker edge color to blue. Set the marker face color using an RGB triplet color.

Note: Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead, such as `set(s,'LineWidth',0.6)`.

```
s.LineWidth = 0.6;
s.MarkerEdgeColor = 'b';
s.MarkerFaceColor = [0 0.5 0.5];
```

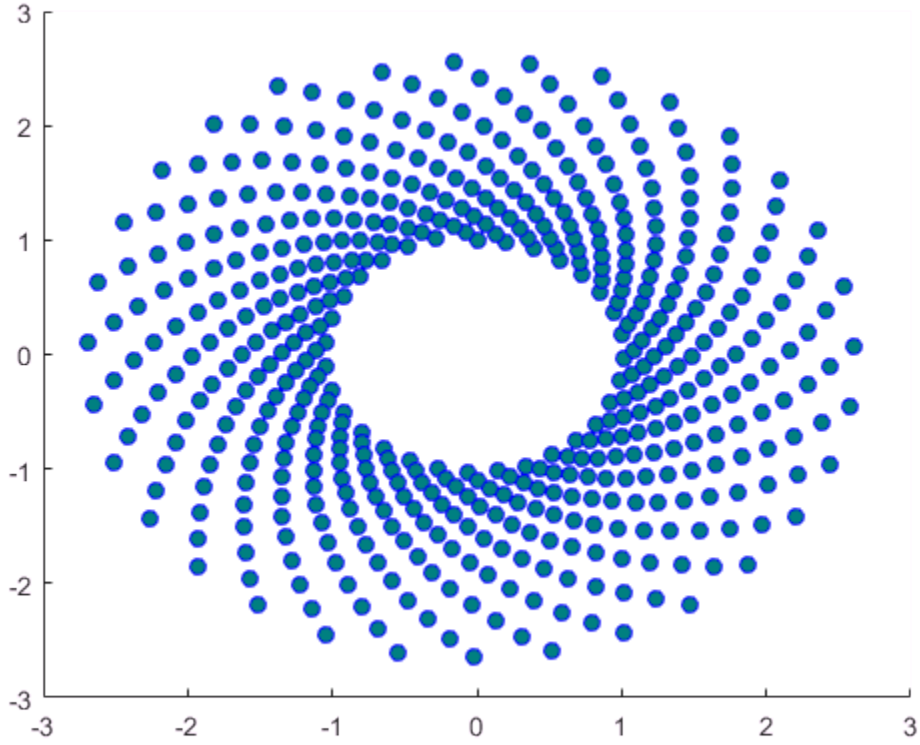

- "Plot Dates and Durations"
- "Plot Categorical Data"

Input Arguments

x — x values

vector

x values, specified as a vector. `x` and `y` must be vectors of equal length.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

y — y values
vector

y values, specified as a vector. `x` and `y` must be vectors of equal length.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

sz — Marker area
36 (default) | numeric scalar | row or column vector | `[]`

Marker area in points squared, specified in one of these forms:

- Numeric scalar — Plot all markers with equal size.
- Row or column vector — Use different sizes for each marker. Corresponding elements in `x`, `y`, and `sz` determine the location and area of each marker. The length of `sz` must equal the length of `x` and `y`.
- `[]` — Use the default area of 36 points squared.

The units for the marker area is points squared.

Example: `50`

Example: `[36 25 25 17 46]`

c — Marker color
`[0 0 1]` (default) | character vector of color name | RGB triplet | three-column matrix of RGB triplets | vector

Marker color, specified in one of these forms:

- Character vector of a color name or an RGB triplet — Plot all markers with the same color.
- Three column matrix of RGB triplets — Use different colors for each marker. Each row of the matrix specifies an RGB triplet color for the corresponding marker. The number of rows must equal the length of `x` and `y`.
- Vector — Use different colors for each marker and linearly map values in `c` to the colors in the current colormap. The length of `c` must equal the length of `x` and `y`. To change the colormap for the axes, use the `colormap` function.

  If you have three points in the scatter plot and want the colors to be indices into the colormap, specify `c` as a three-element column vector.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'k'`

Example: `[1 2 3 4]`

`mkr` — Marker type

`'o'` (default) | `'+'` | `'*'` | `'.'` | `'x'` | ...

Marker type, specified as one of the values listed in this table.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle

Value	Description
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`'filled'` — Option to fill interior of markers

`'filled'`

Option to fill the interior of the markers, specified as `'filled'`. Use this option with markers that have a face, for example, `'o'` or `'square'`. Markers that do not have a face and contain only edges do not draw (`'+'`, `'*'`, `'.'`, and `'x'`).

The `'filled'` option sets the `MarkerFaceColor` property of the `Scatter` object to `'flat'` and the `MarkerEdgeColor` property to `'none'`, so the marker faces draw, but the edges do not.

`ax` — Axes object

axes object

Axes object. If you do not specify an axes, then the `scatter` function uses the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'MarkerFaceColor','red'` sets the marker face color to red.

The `Scatter` object properties listed here are only a subset. For a complete list, see Scatter Properties.

`'MarkerEdgeColor'` — Marker outline color

`'flat'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'flat'` — Colors defined by the `CData` property.
- `'none'` — No color, which makes unfilled markers invisible.
- RGB triplet or character vector of color name — Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`'MarkerFaceColor'` — Marker fill color

`'none'` (default) | `'flat'` | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — No color, which makes the interior invisible.
- `'flat'` — Colors defined by the `CData` property.
- `'auto'` — Same color as the Color property for the axes.
- RGB triplet or character vector of a color name— Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.3 0.2 0.1]

Example: 'green'

'LineWidth' — Width of marker edge
0.5 (default) | positive value

Width of marker edge, specified as a positive value in point units.

Example: 0.75

Output Arguments

s — Scatter object
Scatter object

Scatter object. Use s to access and modify properties of the scatter chart after it has been created.

See Also

See Also

Functions
hold | plot | scatter3

Properties

Scatter Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

External Websites

MATLAB Plot Gallery

Introduced before R2006a

scatter3

3-D scatter plot

Syntax

```
scatter3(X,Y,Z)
scatter3(X,Y,Z,S)
scatter3(X,Y,Z,S,C)
scatter3( ___ ,'filled')
scatter3( ___ ,markertype)
scatter3( ___ ,Name,Value)

scatter3(ax, ___ )

h = scatter3( ___ )
```

Description

`scatter3(X,Y,Z)` displays circles at the locations specified by the vectors `X`, `Y`, and `Z`.

`scatter3(X,Y,Z,S)` draws each circle with the size specified by `S`. To plot each circle with equal size, specify `S` as a scalar. To plot each circle with a specific size, specify `S` as a vector.

`scatter3(X,Y,Z,S,C)` draws each circle with the color specified by `C`.

- If `C` is a character vector of a color name or an RGB triplet, then all circles are plotted with the specified color.
- If `C` is a three column matrix with the number of rows in `C` equal to the length of `X`, `Y`, and `Z`, then each row of `C` specifies an RGB color value for the corresponding circle.
- If `C` is a vector with length equal to the length of `X`, `Y`, and `Z`, then the values in `C` are linearly mapped to the colors in the current colormap.

`scatter3( ___ ,'filled')` fills in the circles, using any of the input argument combinations in the previous syntaxes.

`scatter3( ___ ,markertype)` specifies the marker type.

`scatter3( ___ ,Name,Value)` modifies the scatter chart using one or more name-value pair arguments.

`scatter3(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes (`gca`). The `ax` option can precede any of the input argument combinations in the previous syntaxes.

`h = scatter3( ___ )` returns the `Scatter` object. Use `h` to modify properties of the scatter chart after it is created.

Examples

Create 3-D Scatter Plot

Create a 3-D scatter plot. Use `sphere` to define vectors `x`, `y`, and `z`.

```
figure
[X,Y,Z] = sphere(16);
x = [0.5*X(:); 0.75*X(:); X(:)];
y = [0.5*Y(:); 0.75*Y(:); Y(:)];
z = [0.5*Z(:); 0.75*Z(:); Z(:)];
scatter3(x,y,z)
```

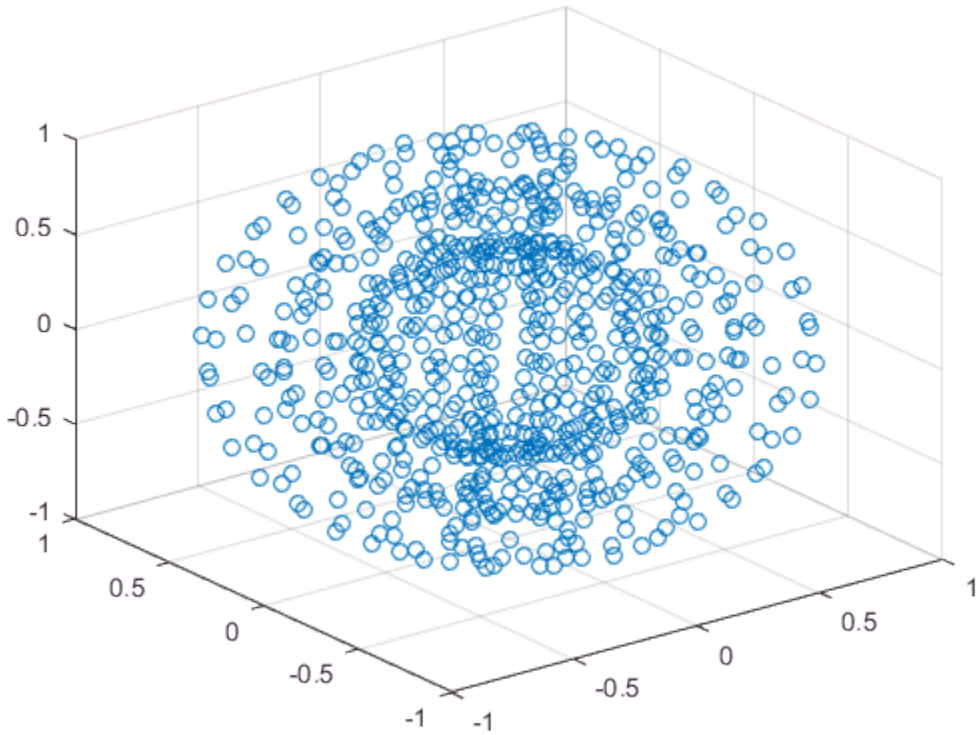

Vary Marker Size

Use `sphere` to define vectors `x`, `y`, and `z`.

```
[X,Y,Z] = sphere(16);
x = [0.5*X(:); 0.75*X(:); X(:)];
y = [0.5*Y(:); 0.75*Y(:); Y(:)];
z = [0.5*Z(:); 0.75*Z(:); Z(:)];
```

Define vector `s` to specify the marker sizes.

```
S = repmat([100,50,5],numel(X),1);
s = S(:);
```

Create a 3-D scatter plot and use `view` to change the angle of the axes in the figure.

```
figure
scatter3(x,y,z,s)
view(40,35)
```

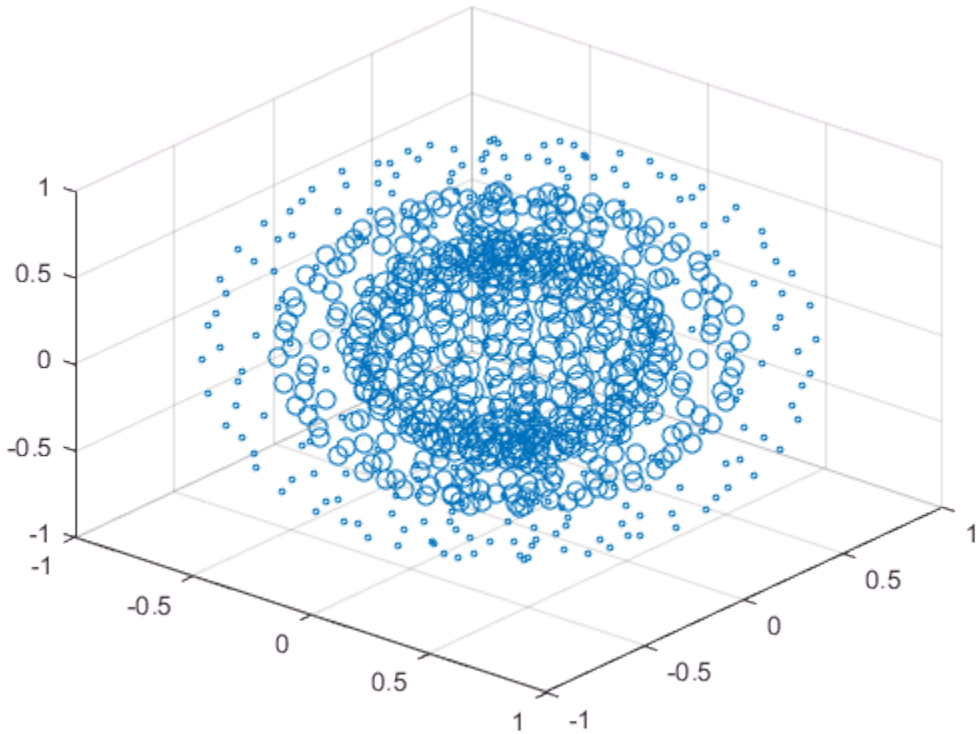

Corresponding entries in `x`, `y`, `z`, and `s` determine the location and size of each marker.

Vary Marker Color

Use `sphere` to define vectors `x`, `y`, and `z`.

```
[X,Y,Z] = sphere(16);
x = [0.5*X(:); 0.75*X(:); X(:)];
```

```
y = [0.5*Y(:); 0.75*Y(:); Y(:)];
z = [0.5*Z(:); 0.75*Z(:); Z(:)];
```

Define vectors `s` and `c` to specify the size and color of each marker.

```
S = repmat([50,25,10],numel(X),1);
C = repmat([1,2,3],numel(X),1);
s = S(:);
c = C(:);
```

Create a 3-D scatter plot and use `view` to change the angle of the axes in the figure.

```
figure
scatter3(x,y,z,s,c)
view(40,35)
```

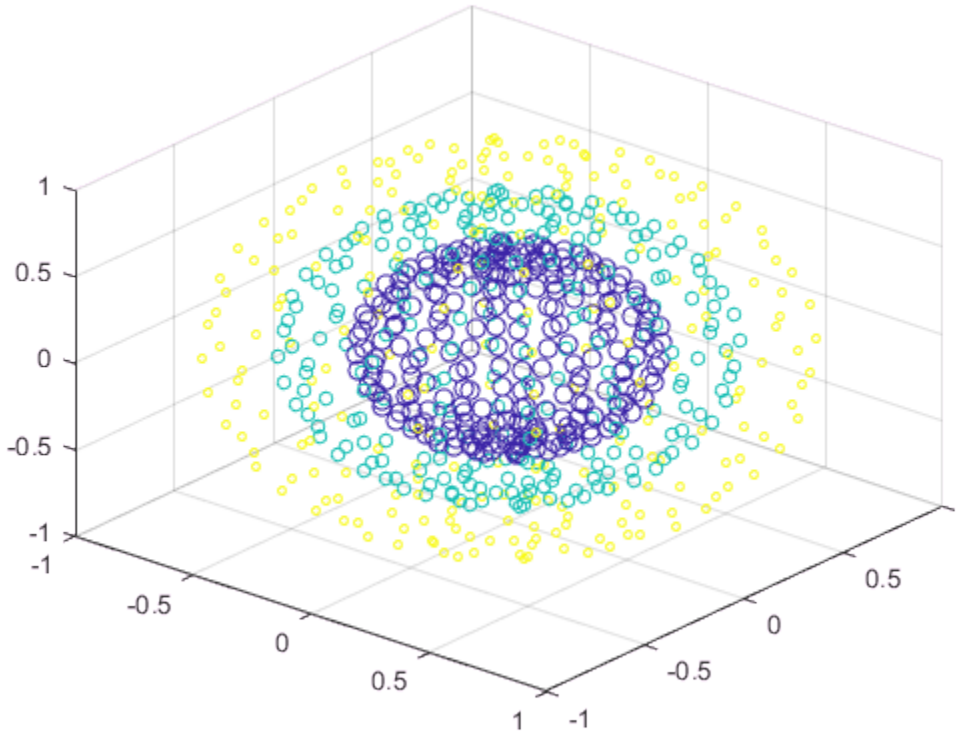

Corresponding entries in `x`, `y`, `z`, and `c` determine the location and color of each marker.

Fill in Markers

Create vectors `x` and `y` as cosine and sine values with random noise.

```
z = linspace(0,4*pi,250);
x = 2*cos(z) + rand(1,250);
y = 2*sin(z) + rand(1,250);
```

Create a 3-D scatter plot and fill in the markers. Use `view` to change the angle of the axes in the figure.

```
scatter3(x,y,z,'filled')
view(-30,10)
```

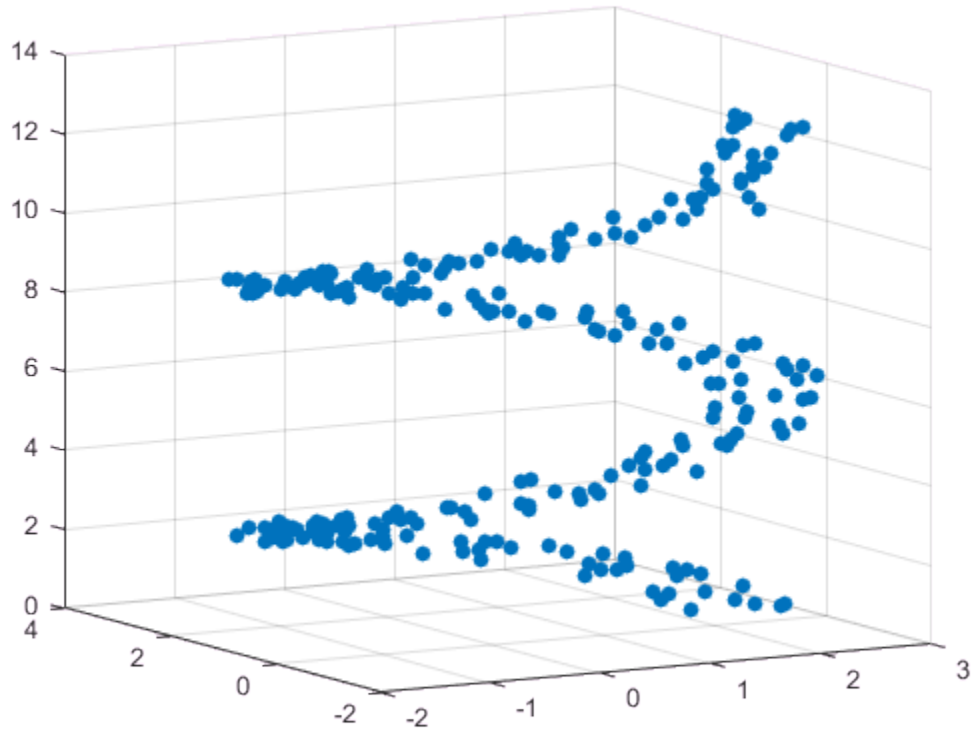

Set Marker Type

Initialize the random-number generator to make the output of `rand` repeatable. Define vectors `x` and `y` as cosine and sine values with random noise.

```
rng default
z = linspace(0,4*pi,250);
x = 2*cos(z) + rand(1,250);
y = 2*sin(z) + rand(1,250);
```

Create a 3-D scatter plot and set the marker type. Use `view` to change the angle of the axes in the figure.

```
figure
scatter3(x,y,z,'*')
view(-30,10)
```

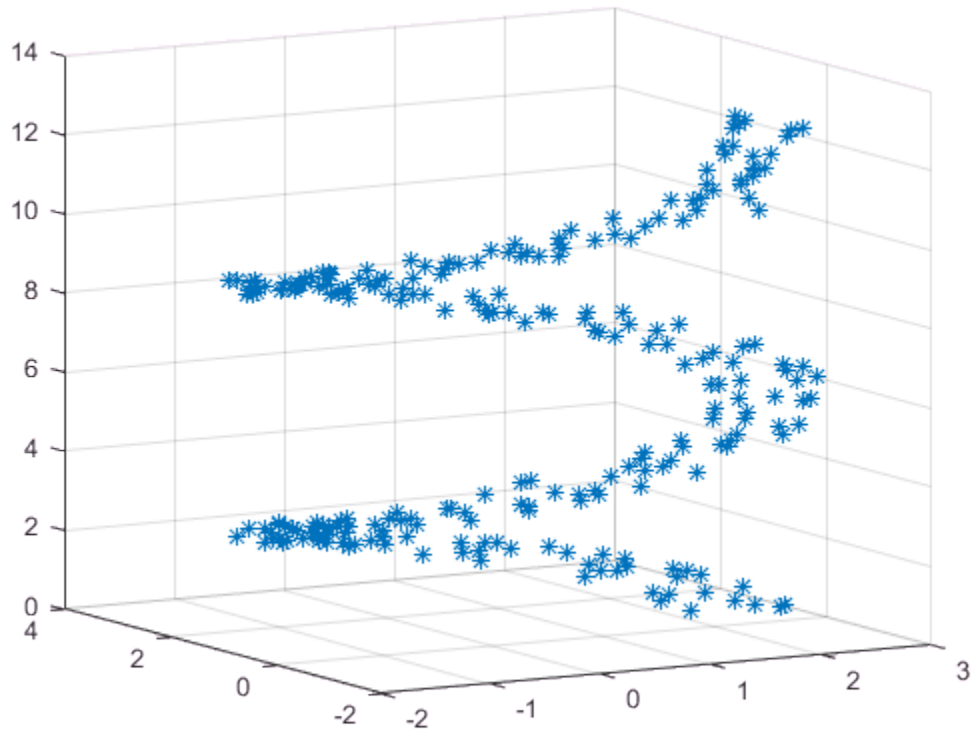

Set Marker Properties

Initialize the random-number generator to make the output of `rand` repeatable. Define vectors `x` and `y` as cosine and sine values with random noise.

```
rng default
z = linspace(0,4*pi,250);
x = 2*cos(z) + rand(1,250);
y = 2*sin(z) + rand(1,250);
```

Create a 3-D scatter plot and set the marker edge color and the marker face color. Use `view` to change the angle of the axes in the figure.

```
figure
scatter3(x,y,z,...
        'MarkerEdgeColor','k',...
        'MarkerFaceColor',[0 .75 .75])
view(-30,10)
```

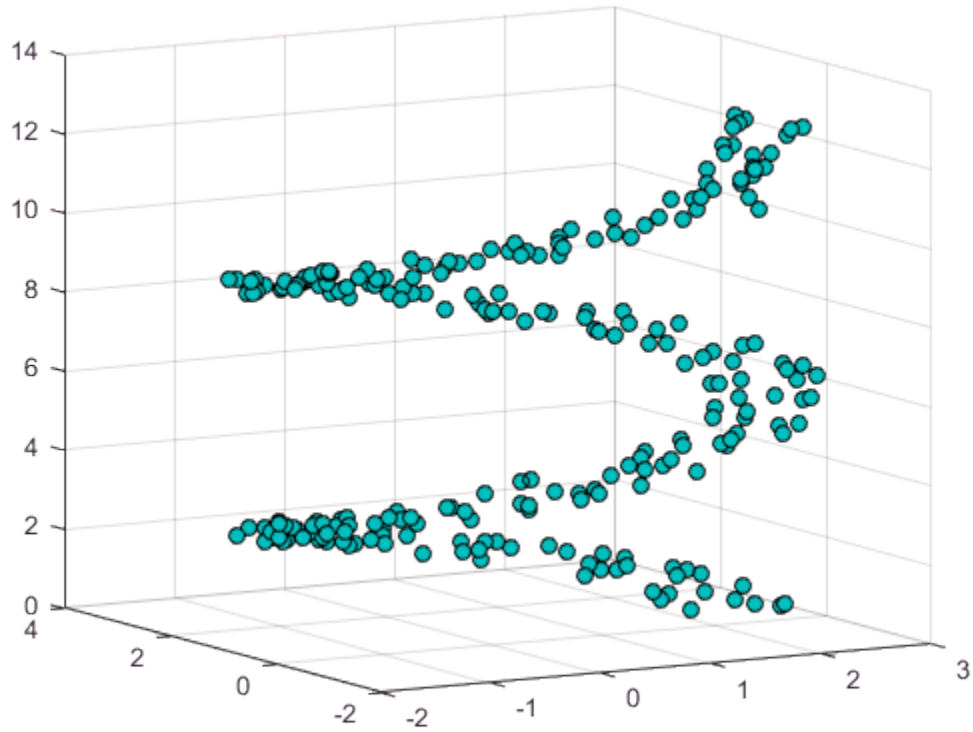

Specify Axes for 3-D Scatter Plot

Load the `seamount` data set to get vectors `x`, `y`, and `z`.

```
load seamount
```

Create a figure with two subplots and return the handles to the two axes in array `hs`. In each subplot, create a 3-D scatter plot. Specify the marker properties for each scatter plot.

```
figure
hs(1) = subplot(2,1,1);
hs(2) = subplot(2,1,2);
scatter3(hs(1),x,y,z,'MarkerFaceColor',[0 .75 .75])
scatter3(hs(2),x,y,z,'*')
```

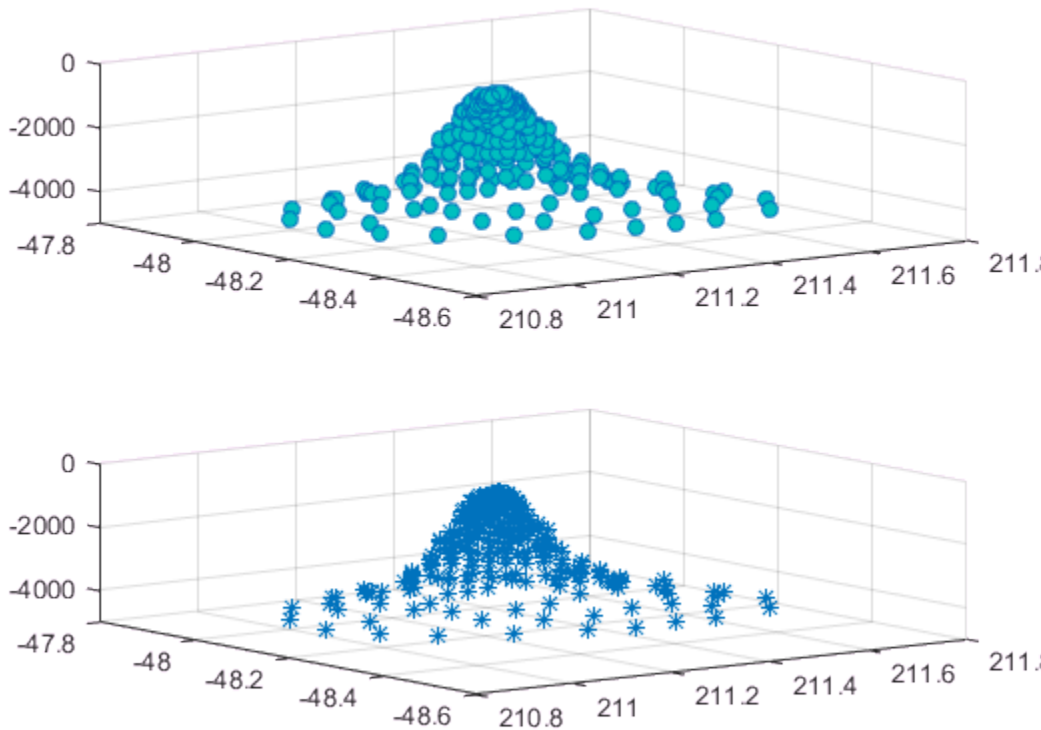

Set Scatter Series Properties Using Handle

Use the `sphere` function to create vectors `x`, `y`, and `z`.

```
[X,Y,Z] = sphere(16);
x = [0.5*X(:); 0.75*X(:); X(:)];
y = [0.5*Y(:); 0.75*Y(:); Y(:)];
z = [0.5*Z(:); 0.75*Z(:); Z(:)];
```

Create vectors `s` and `c` to specify the size and color for each marker.

```
S = repmat([70,50,20],numel(X),1);
C = repmat([1,2,3],numel(X),1);
s = S(:);
c = C(:);
```

Create a 3-D scatter plot and return the scatter series object.

```
h = scatter3(x,y,z,s,c);
```

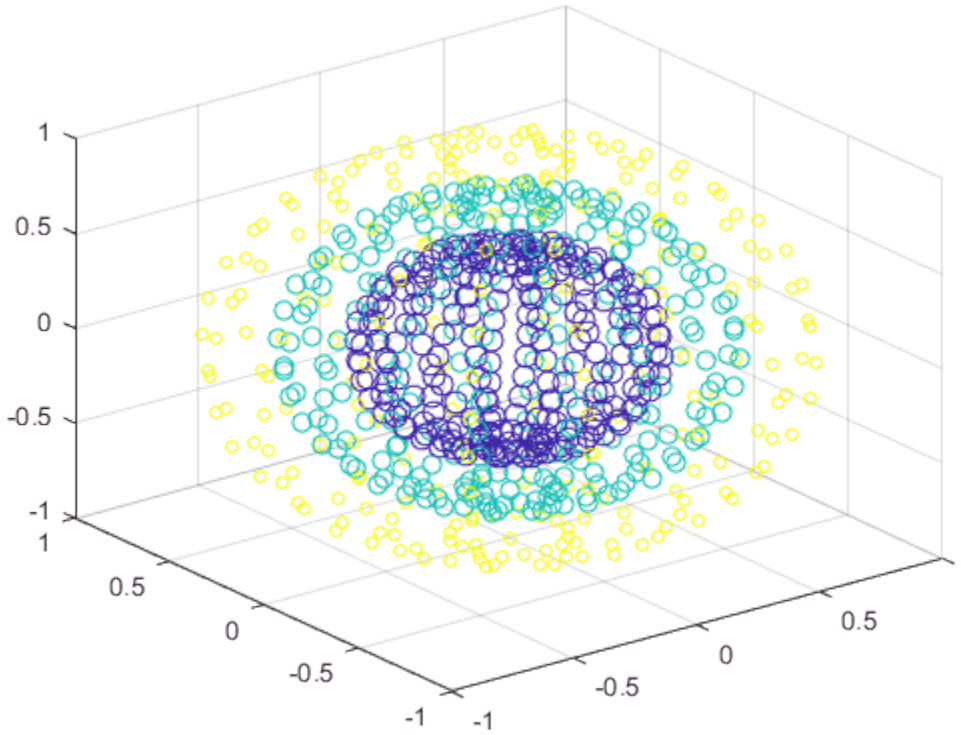

Use an RGB triplet color value to set the marker face color. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
h.MarkerFaceColor = [0 0.5 0.5];
```

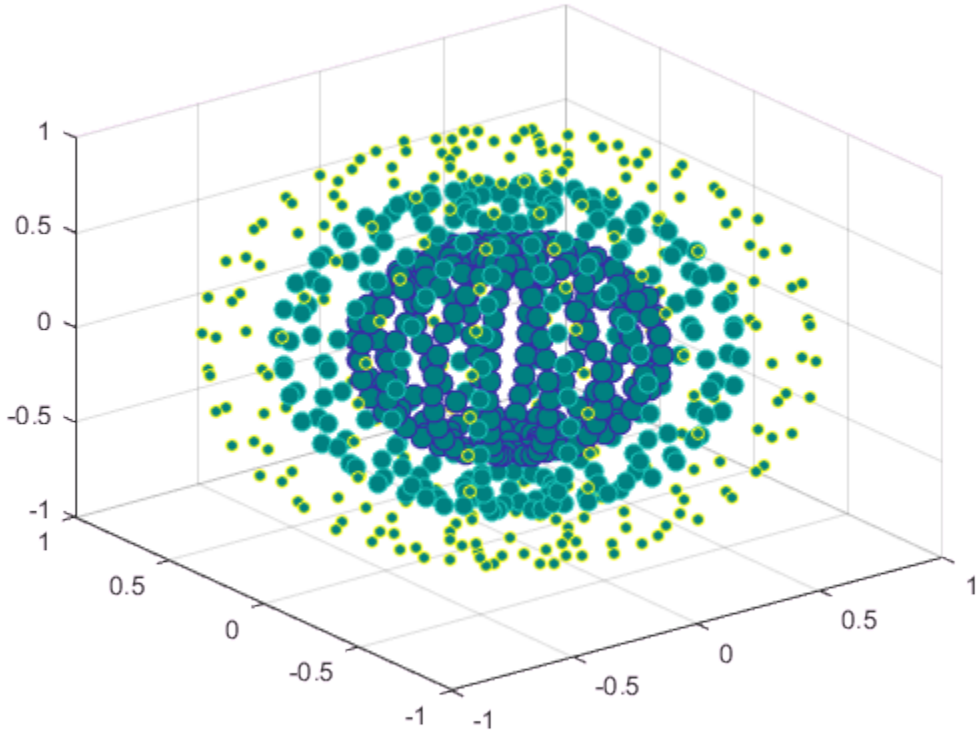

- “Plot Dates and Durations”
- “Plot Categorical Data”

Input Arguments

X — x values
vector

x values, specified as a vector. X, Y, and Z must be vectors of equal length.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

Y — y values
(default) | vector

y values, specified as a vector. X, Y, and Z must be vectors of equal length.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

Z — z values
(default) | vector

z values, specified as a vector. X, Y, and Z must be vectors of equal length.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

S — Marker area
36 (default) | scalar | vector | `[ ]`

Marker area, specified as a scalar, a vector, or `[ ]`. The values in S must be positive. The units for area are points squared.

- If S is a scalar, then `scatter3` plots all markers with the specified area.
- If S is a row or column vector, then each entry in S specifies the area for the corresponding marker. The length of S must equal the length of X, Y and Z. Corresponding entries in X, Y, Z and S determine the location and area of each marker.
- If S is empty, then the default size of 36 points squared is used.

Example: `50`

Example: `[36,25,25,17,46]`

`C` — Marker color

[0 0 1] (blue) (default) | character vector of color name | RGB triplet | three-column matrix of RGB triplets | vector

Marker color, specified as a character vector of a color name, an RGB triplet, a three-column matrix of RGB triplet, or a vector.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

If you have three points in the scatter plot and want the colors to be indices into the colormap, specify `C` as a three-element column vector.

Example: `'y'`

Example: `[1,2,3,4]`

`markertype` — Marker

`'o'` (default) | `'+'` | `'*'` | `'.'` | `'x'` | ...

Marker, specified as one of the markers in this table.

Value	Description
`'o'`	Circle
`'+'`	Plus sign

Value	Description
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`ax` — Axes object
axes object

Axes object. If you do not specify an axes, then `scatter3` plots into the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'MarkerFaceColor','red'` sets the marker face color to red.

The properties listed here are only a subset. For a complete list, see Scatter Properties.

`'LineWidth'` — Width of marker edge
`0.5` (default) | positive value

Width of marker edge, specified as a positive value in point units.

Example: `0.75`

'MarkerEdgeColor' — Marker outline color

'flat' (default) | 'none' | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- 'flat' — Colors defined by the CData property.
- 'none' — No color, which makes unfilled markers invisible.
- RGB triplet or character vector of color name — Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

'MarkerFaceColor' — Marker fill color

'none' (default) | 'flat' | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — No color, which makes the interior invisible.
- 'flat' — Colors defined by the CData property.
- 'auto' — Same color as the Color property for the axes.

- RGB triplet or character vector of a color name— Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Output Arguments

`h` — `Scatter` object

`Scatter` object

`Scatter` object. This is a unique identifier, which you can use to query and modify the properties of the `Scatter` object after it is created.

See Also

See Also

Functions

`LineSpec` | `plot3` | `scatter`

Properties

Scatter Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

Scatter Properties

Control scatter chart appearance and behavior

Description

`Scatter` properties control the appearance and behavior of `Scatter` object. By changing property values, you can modify certain aspects of the scatter chart.

Starting in R2014b, you can use dot notation to query and set properties.

```
s = scatter(1:10,1:10);
m = s.Marker;
s.Marker = '*';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Markers

`Marker` — Marker symbol
`'o'` (default) | `'+'` | `'*'` | `'.'` | `'x'` | ...

Marker symbol, specified as one of the options listed in this table:

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle

Value	Description
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerEdgeColor` — Marker outline color

`'flat'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'flat'` — Colors defined by the `CData` property.
- `'none'` — No color, which makes unfilled markers invisible.
- RGB triplet or character vector of color name — Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`MarkerFaceColor` — Marker fill color

`'none'` (default) | `'flat'` | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — No color, which makes the interior invisible.
- `'flat'` — Colors defined by the `CData` property.
- `'auto'` — Same color as the Color property for the axes.
- RGB triplet or character vector of a color name— Specify a custom color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.3 0.2 0.1]`

Example: `'green'`

`MarkerEdgeAlpha` — Edge transparency

1 (default) | scalar in range `[0,1]`

Marker edge transparency, specified as a scalar in the range `[0,1]`. A value of 1 is opaque and 0 is completely transparent. Values between 0 and 1 are semitransparent.

Example: `s.EdgeAlpha = 0.5;`

`MarkerFaceAlpha` — Marker face transparency

1 (default) | scalar in range `[0,1]`

Marker face transparency, specified as a scalar in the range `[0,1]`. A value of 1 is opaque and 0 is completely transparent. Values between 0 and 1 are semitransparent.

Example: `s.FaceAlpha = 0.5;`

`LineWidth` — Width of marker edge

`0.5` (default) | positive value

Width of marker edge, specified as a positive value in point units.

Example: `0.75`

Data

`XData` — x values

`[]` (default) | scalar | vector

x values, specified as a scalar or a vector. The scatter plot displays an individual marker for each value in `XData`.

The input argument `X` to the `scatter` and `scatter3` functions set the *x* values. `XData` and `YData` must have equal lengths.

Example: `[1 2 4 2 6]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`XDataSource` — Variable linked to `XData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `XData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `XData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `XData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'x'`

`YData` — y values

[ ] (default) | scalar | vector

y values, specified as a scalar or a vector. The scatter plot displays an individual marker for each value in `YData`.

The input argument `Y` to the `scatter` and `scatter3` functions set the *y* values. `XData` and `YData` must have equal lengths.

Example: `[1 3 3 4 6]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`YDataSource` — Variable linked to `YData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `YData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `YData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `YData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'y'`

`ZData` — z values

[ ] (default) | scalar | vector

z values, specified as a scalar or a vector.

- For 2-D scatter plots, `ZData` is empty by default.
- For 3-D scatter plots, the input argument `Z` to the `scatter3` function sets the *z* values. `XData`, `YData`, and `ZData` must have equal lengths.

Example: `[1 2 2 1 0]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ZDataSource` — Variable linked to `ZData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `ZData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `ZData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `ZData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'z'`

`CData` — Marker colors

`[]` (default) | RGB triplet | matrix of RGB triplets | vector

Marker colors, specified as one of these values:

- RGB triplet — Use the same color for all the markers in the plot. An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`, for example, `[0.5 0.6 0.7]`.
- Three-column matrix of RGB triplets — Use a different color for each marker in the plot. Each row of the matrix defines one color. The number of rows must equal the number of markers.
- Vector — Use a different color for each marker in the plot. Specify `CData` as a vector the same length as `XData`. Linearly map the values in the vector to the colors in the current colormap.

Example: `[1 0 0; 0 1 0; 0 0 1]`

`CDataSource` — Variable linked to `CData`

`''` | character vector containing MATLAB workspace variable

Variable linked to `CData`, specified as a character vector containing a MATLAB workspace variable. MATLAB evaluates the variable in the base workspace to generate the `CData`.

By default, there is no linked variable so the value is an empty character vector. If you link a variable, then MATLAB does not update the `CData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

`SizeData` — Marker sizes

`[ ]` (default) | scalar | vector

Marker sizes, specified in one of these forms:

- Scalar — Use the same size for all of the markers.
- Vector — Use a different size for each marker. Specify `SizeData` as a vector the same length as `XData`.

Specify the values in point units, where one point equals 1/72 inch. To specify a marker that has an area of one square inch, use a value of 72^2.

Example: `50`

`SizeDataSource` — Variable linked to `SizeData`

`''` | character vector containing MATLAB workspace variable

Variable linked to `SizeData`, specified as a character vector containing a MATLAB workspace variable. MATLAB evaluates the variable in the base workspace to generate the `SizeData`.

By default, there is no linked variable so the value is an empty character vector. If you link a variable, then MATLAB does not update the `SizeData` values. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

`RData` — Radius values

vector

Radius values, specified as a vector. `ThetaData` and `RData` must be vectors of equal length.

This property applies only to polar axes.

`RDataSource` — Variable linked to `RData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `RData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `RData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `RData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

This property applies only to polar axes.

`ThetaData` — Angle values

vector

Angle values, specified as a vector. `ThetaData` and `RData` must be vectors of equal length.

This property applies only to polar axes.

`ThetaDataSource` — Variable linked to `ThetaData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `ThetaData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `RData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `ThetaData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

This property applies only to polar axes.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

EraseMode — (removed) Technique to draw and erase objects

'normal' (default) | 'none' | 'xor' | 'background'

Note: EraseMode has been removed. You can delete code that accesses the EraseMode property with minimal impact. If you were using EraseMode to create line animations, use the animatedline function instead.

Technique to draw and erase objects, specified as one of these values:

- 'normal' — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- 'none' — Do not erase the object when it is moved or destroyed. After you erase the object with EraseMode,'none', it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- 'xor' — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- 'background' — Erase the object by redrawing it in the axes background color, or the figure background color if the axes Color property is 'none'. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the EraseMode property of all objects is set to 'normal'. This means graphics objects created with EraseMode set to 'none', 'xor', or 'background' can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the getframe command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

Type — Type of graphics object

'scatter'

This property is read-only.

Type of graphics object, returned as `'scatter'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `PolarAxes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `PolarAxes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see “Callback Definition”.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Scatter` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `Scatter` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Scatter` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Scatter` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Scatter` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Scatter` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Scatter` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`HitTestArea` — (removed) Extents of clickable area

`'off'` (default) | `'on'`

Note: `HitTestArea` has been removed. Use `PickableParts` instead.

Extents of clickable area, specified as one of these values:

- `'off'` — Click the object to select it. This is the default value.
- `'on'` — Click anywhere within the extent of the object to select it, that is, anywhere within the rectangle that encloses the object.

Example: `'off'`

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Scatter` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Scatter` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback
`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`scatter` | `scatter3`

Topics

"Access Property Values"
"Graphics Object Properties"

schur

Schur decomposition

Syntax

```
T = schur(A)
T = schur(A,flag)
[U,T] = schur(A,...)
```

Description

The `schur` command computes the Schur form of a matrix.

`T = schur(A)` returns the Schur matrix `T`.

`T = schur(A,flag)` for real matrix A, returns a Schur matrix `T` in one of two forms depending on the value of `flag`:

`'complex'`	`T` is triangular and is complex if `A` is real and has complex eigenvalues.
`'real'`	`T` has the real eigenvalues on the diagonal and the complex eigenvalues in 2-by-2 blocks on the diagonal. `'real'` is the default when `A` is real.

If `A` is complex, `schur` returns the complex Schur form in matrix `T` and `flag` is ignored. The complex Schur form is upper triangular with the eigenvalues of `A` on the diagonal.

The function `rsf2csf` converts the real Schur form to the complex Schur form.

`[U,T] = schur(A,...)` also returns a unitary matrix `U` so that `A = U*T*U'` and `U'*U = eye(size(A))`.

Examples

`H` is a 3-by-3 eigenvalue test matrix:

```
H = [ -149    -50   -154
       537    180    546
       -27     -9    -25 ]
```

Its Schur form is

```
schur(H)
```

```
ans =
     1.0000   -7.1119 -815.8706
          0    2.0000  -55.0236
          0         0    3.0000
```

The eigenvalues, which in this case are 1, 2, and 3, are on the diagonal. The fact that the off-diagonal elements are so large indicates that this matrix has poorly conditioned eigenvalues; small changes in the matrix elements produce relatively large changes in its eigenvalues.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generated code can return a different Schur decomposition than MATLAB returns.

See Also

`eig` | `hess` | `qz` | `rsf2csf`

Introduced before R2006a

scatteredInterpolant

Interpolate 2-D or 3-D scattered data

Description

Use `scatteredInterpolant` to perform interpolation on a 2-D or 3-D data set of scattered data. `scatteredInterpolant` returns the interpolant `F` for the given data set. You can evaluate `F` at a set of query points, such as `(xq,yq)` in 2-D, to produce interpolated values `vq = F(xq,yq)`.

Use `griddedInterpolant` to perform interpolation with gridded data.

Create Object

Syntax

Description

`F = scatteredInterpolant` creates an empty scattered data interpolant object.

`F = scatteredInterpolant(x,y,v)` creates an interpolant that fits a surface of the form $v = F(x,y)$. Vectors `x` and `y` specify the `(x,y)` coordinates of the sample points. `v` is a vector that contains the sample values associated with the points `(x,y)`.

`F = scatteredInterpolant(x,y,z,v)` creates a 3-D interpolant of the form $v = F(x,y,z)$.

`F = scatteredInterpolant(P,v)` specifies the coordinates of the sample points as an array. The rows of `P` contain the (x, y) or (x, y, z) coordinates for the values in `v`.

`F = scatteredInterpolant( ___ ,Method)` specifies an interpolation method: `'nearest'`, `'linear'`, or `'natural'`. Specify `Method` as the last input argument in any of the first three syntaxes.

`F = scatteredInterpolant( ___ ,Method,ExtrapolationMethod)` specifies both the interpolation and extrapolation methods. Pass `Method` and `ExtrapolationMethod` together as the last two input arguments in any of the first three syntaxes.

- `Method` can be: `'nearest'`, `'linear'`, or `'natural'`.
- `ExtrapolationMethod` can be: `'nearest'`, `'linear'`, or `'none'`.

Input Arguments

`x, y, z` — Sample points
vector

Sample points, specified as vectors of the same size as `v`. The sample points should be unique. However, if the sample points contain duplicates, `scatteredInterpolant` displays a warning and merges the duplicates into a single point.

Data Types: `single` | `double`

`P` — Sample points array
matrix

Sample points array, specified as an `m`-by-`n` matrix, where `m` is the number of points and `n` is the dimension of the space where the points reside. Each row of `P` contains the (x, y) or (x, y, z) coordinates of a sample point. The sample points should be unique. However, if the sample points contain duplicates, `scatteredInterpolant` displays a warning and merges the duplicates into a single point.

Data Types: `single` | `double`

`v` — Sample values
vector

Sample values, specified as a vector that defines the function values at the sample points, $v = F(x,y,z)$.

Data Types: `single` | `double`

`Method` — Interpolation method
`'linear'` (default) | `'nearest'` | `'natural'`

Interpolation method, specified as one of these options.

Method	Description	Continuity
`'linear'` (default)	Linear interpolation	C^0
`'nearest'`	Nearest neighbor interpolation	Discontinuous

Method	Description	Continuity
`'natural'`	Natural neighbor interpolation	C^1 (except at sample points)

`ExtrapolationMethod` — Extrapolation method
`'linear'` | `'nearest'` | `'none'`

Extrapolation method, specified as one of these options.

ExtrapolationMethod	Description
`'linear'`	Linear extrapolation based on boundary gradients. Default when `Method` is `'linear'` or `'natural'`.
`'nearest'`	Nearest neighbor extrapolation. This method evaluates to the value of the nearest neighbor on the boundary. Default when `Method = 'nearest'`.
`'none'`	No extrapolation. Any queries outside the convex hull of `F.Points` return `NaN`.

Evaluate Interpolant at Specific Points

Use `scatteredInterpolant` to create the interpolant, `F`. Then you can evaluate `F` at specific points using any of the following syntaxes:

- `Vq = F(Pq)` specifies the query points in the matrix `Pq`. Each row in `Pq` contains the coordinates of a query point.
- `Vq = F(Xq,Yq)` and `Vq = F(Xq,Yq,Zq)` specify the query points as two or three matrices of equal size.
- `Vq = F({xq,yq})` and `Vq = F({xq,yq,zq})` specify the query points as grid vectors. Use this syntax to conserve memory when you want to query a large grid of points.

Properties

`Points` — Sample points
matrix

Sample points, specified as a matrix. The size of the matrix is `m`-by-`2` or `m`-by-`3` to represent `m` points in 2-D or 3-D space. Each row of `F.Points` contains the (x, y) or (x,

y, *z*) coordinates of a unique sample point. The rows in `F.Points` correspond to the function values in `F.Values`.

Data Types: `single` | `double`

`Values` — Function values at sample points
vector

Function values at sample points, specified as a vector of values associated with each point in `F.Points`.

Data Types: `single` | `double`

`Method` — Interpolation method
`'linear'` (default) | `'nearest'` | `'natural'`

Interpolation method, specified as a character vector for the method used to interpolate the data: `'linear'`,`'nearest'` , or `'natural'`.

`ExtrapolationMethod` — Extrapolation method
`'linear'` | `'nearest'` | `'none'`

Extrapolation method, specified as a character vector for the method used to extrapolate the data: `'nearest'`, `'linear'`, or `'none'`.

Example:

Data Types: `single` | `double`

Examples

2-D Interpolation

Define some sample points and calculate the value of a trigonometric function at those locations. These points are the sample values for the interpolant.

```
t = linspace(3/4*pi,2*pi,50)';
x = [3*cos(t); 2*cos(t); 0.7*cos(t)];
y = [3*sin(t); 2*sin(t); 0.7*sin(t)];
v = repelem([-0.5; 1.5; 2],length(t));
```

Create the interpolant.

```
F = scatteredInterpolant(x,y,v);
```

Evaluate the interpolant at query locations (xq,yq).

```
tq = linspace(3/4*pi+0.2,2*pi-0.2,40)';
xq = [2.8*cos(tq); 1.7*cos(tq); cos(tq)];
yq = [2.8*sin(tq); 1.7*sin(tq); sin(tq)];
vq = F(xq,yq);
```

Plot the result.

```
plot3(x,y,v,'.',xq,yq,vq,'.'), grid on
title('Linear Interpolation')
xlabel('x'), ylabel('y'), zlabel('Values')
legend('Sample data','Interpolated query data','Location','Best')
```

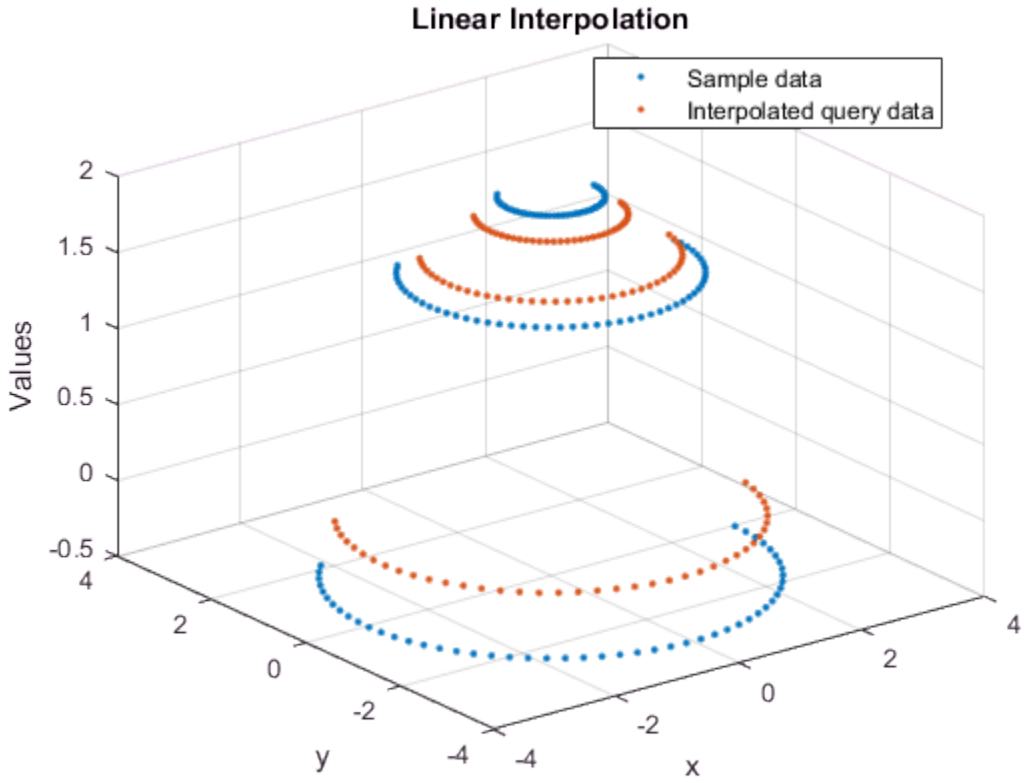

3-D Interpolation

Create an interpolant for a set of scattered sample points, then evaluate the interpolant at a set of 3-D query points.

Define 200 random points and sample a trigonometric function. These points are the sample values for the interpolant.

```
P = -2.5 + 5*gallery('uniformdata',[200 3],0);
v = sin(P(:,1).^2 + P(:,2).^2 + P(:,3).^2)./(P(:,1).^2+P(:,2).^2+P(:,3).^2);
```

Create the interpolant.

```
F = scatteredInterpolant(P,v);
```

Evaluate the interpolant at query locations (`xq`,`yq`,`zq`).

```
[xq,yq,zq] = meshgrid(-2:0.25:2);
vq = F(xq,yq,zq);
```

Plot slices of the result.

```
xslice = [-.5,1,2];
yslice = [0,2];
zslice = [-2,0];
slice(xq,yq,zq,vq,xslice,yslice,zslice)
```

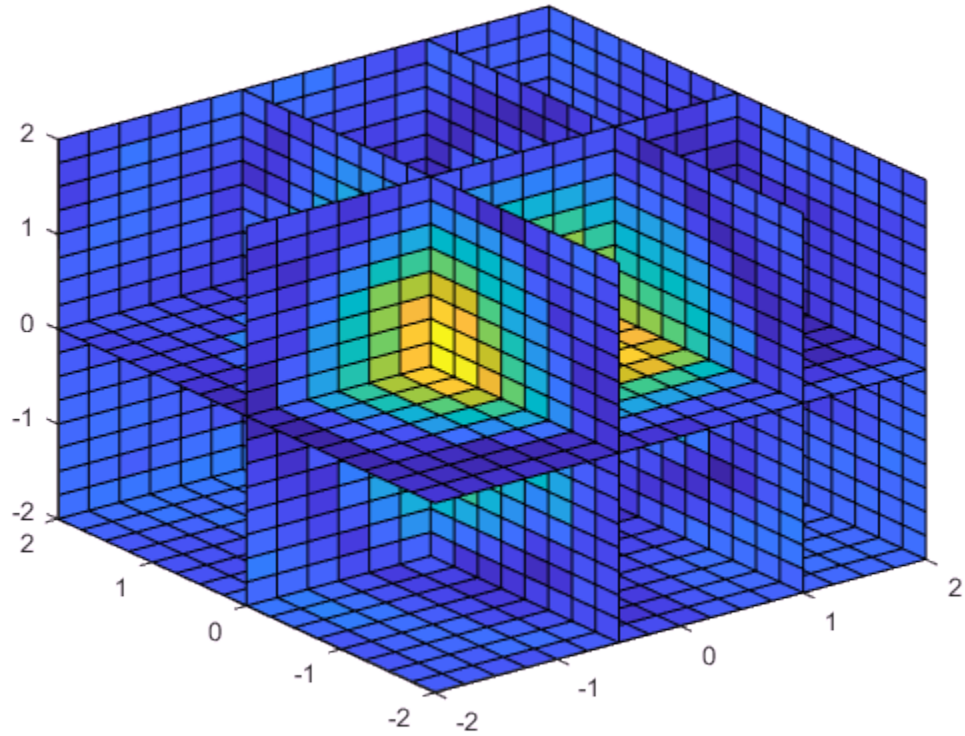

Replacement of Sample Values

Replace the elements in the `Values` property when you want to change the values at the sample points. You get immediate results when you evaluate the new interpolant because the original triangulation does not change.

Create 50 random points and sample an exponential function. These points are the sample values for the interpolant.

```
x = -2.5 + 5*gallery('uniformdata',[50 1],0);
y = -2.5 + 5*gallery('uniformdata',[50 1],1);
v = x.*exp(-x.^2-y.^2);
```

Create the interpolant.

```
F = scatteredInterpolant(x,y,v)
```

```
F = 
  scatteredInterpolant with properties:

                Points: [50×2 double]
                Values: [50×1 double]
                Method: 'linear'
    ExtrapolationMethod: 'linear'
```

Evaluate the interpolant at `(1.40,1.90)`.

```
F(1.40,1.90)
```

```
ans = 0.0029
```

Change the interpolant sample values and reevaluate the interpolant at the same point.

```
vnew = x.^2 + y.^2;
F.Values = vnew;
F(1.40,1.90)
```

```
ans = 6.1109
```

Compare Scattered Data Interpolation Methods

Compare the results of several different interpolation algorithms offered by `scatteredInterpolant`.

Create a sample data set of 50 scattered points. The number of points is artificially small to highlight the differences between the interpolation methods.

```
x = -3 + 6*rand(50,1);
y = -3 + 6*rand(50,1);
v = sin(x).^4 .* cos(y);
```

Create the interpolant and a grid of query points.

```
F = scatteredInterpolant(x,y,v);
[xq,yq] = meshgrid(-3:0.1:3);
```

Plot the results using the `'nearest'`, `'linear'`, and `'natural'` methods. Each time the interpolation method changes, you need to requery the interpolant to get the updated results.

```
F.Method = 'nearest';
vq1 = F(xq,yq);
plot3(x,y,v,'mo')
hold on
mesh(xq,yq,vq1)
title('Nearest Neighbor')
legend('Sample Points','Interpolated Surface','Location','NorthWest')
```

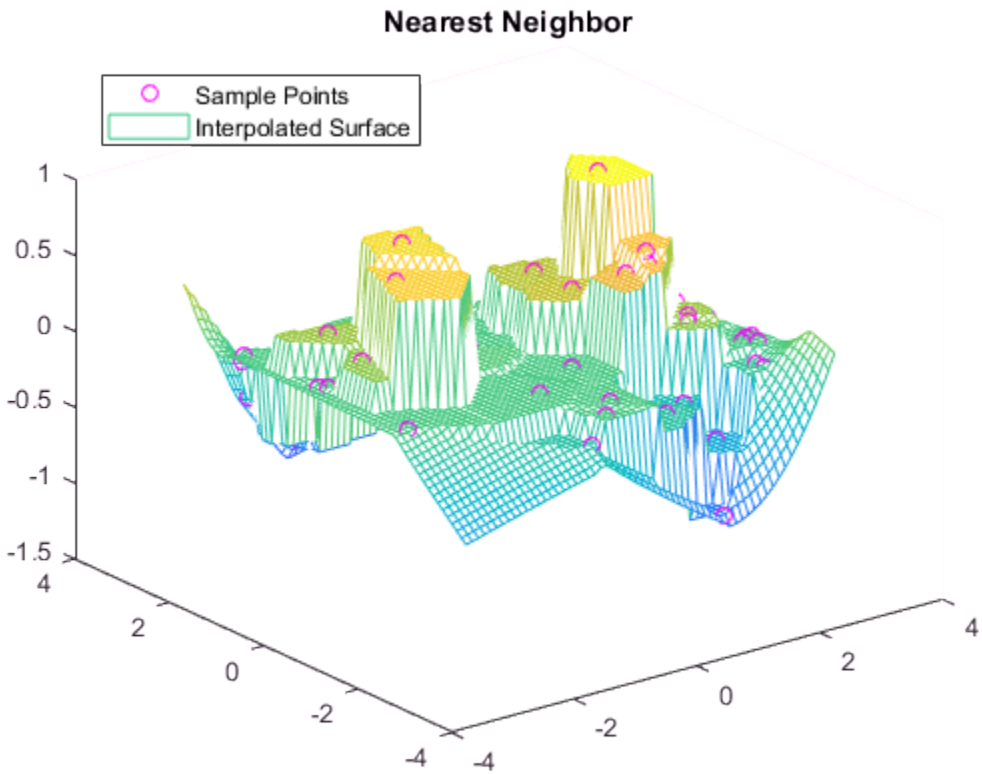


```
F.Method = 'linear';
```

```
vq2 = F(xq,yq);
figure
plot3(x,y,v,'mo')
hold on
mesh(xq,yq,vq2)
title('Linear')
legend('Sample Points','Interpolated Surface','Location','NorthWest')
```

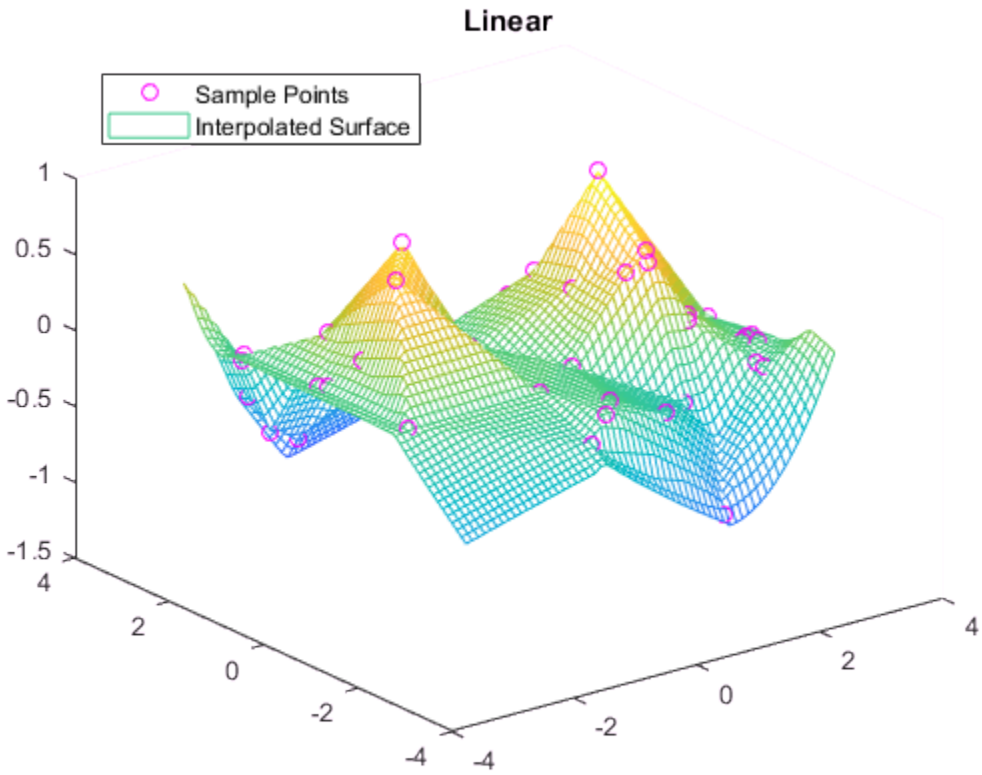


```
F.Method = 'natural';
vq3 = F(xq,yq);
figure
plot3(x,y,v,'mo')
hold on
```

```
mesh(xq,yq,vq3)
title('Natural Neighbor')
legend('Sample Points','Interpolated Surface','Location','NorthWest')
```

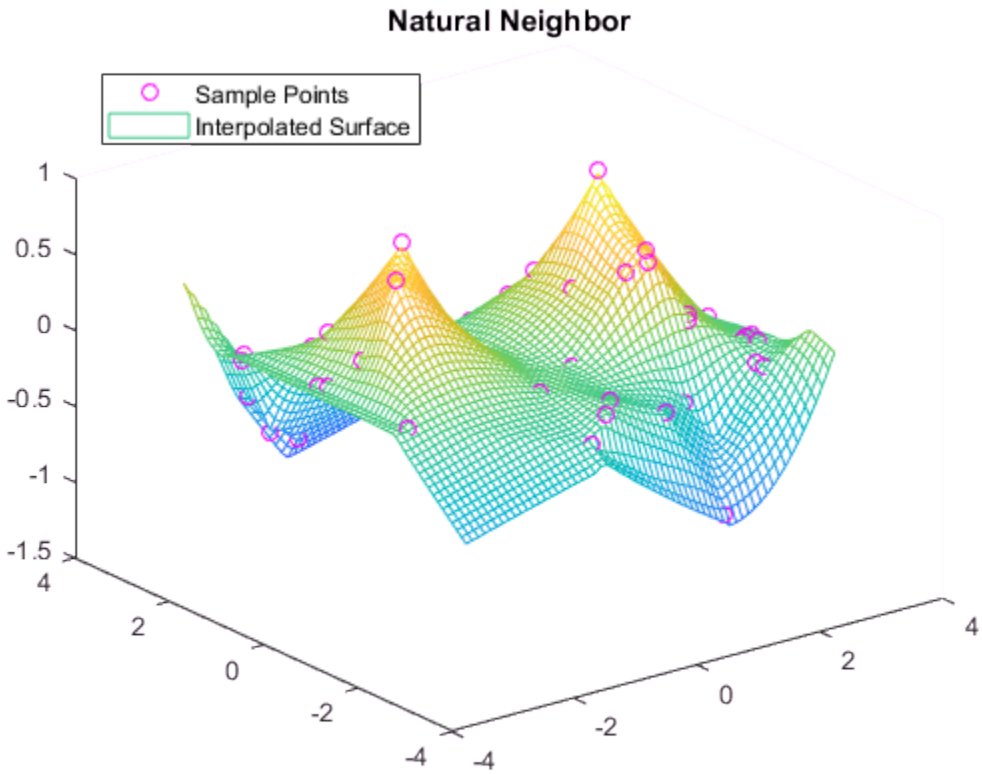

Plot the exact solution.

```
figure
plot3(x,y,v,'mo')
hold on
mesh(xq,yq,sin(xq).^4 .* cos(yq))
title('Exact Solution')
legend('Sample Points','Exact Surface','Location','NorthWest')
```

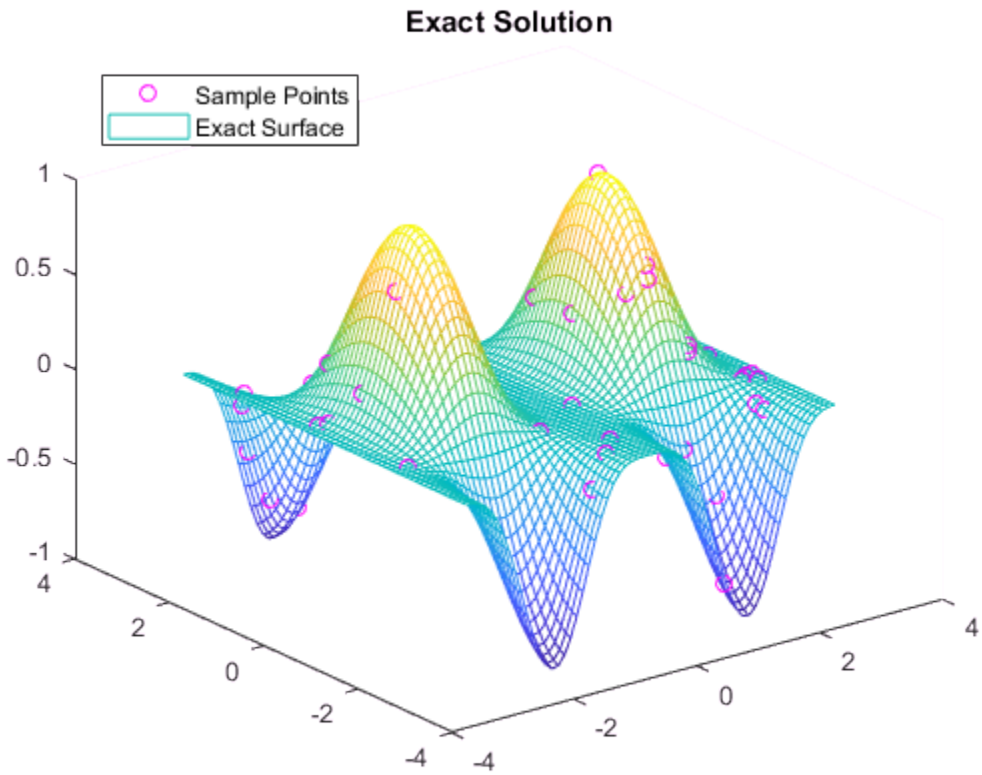

2-D Extrapolation

Query an interpolant at a single point outside the convex hull using nearest neighbor extrapolation.

Define a matrix of 200 random points and sample an exponential function. These points are the sample values for the interpolant.

```
P = -2.5 + 5*gallery('uniformdata',[200 2],0);
x = P(:,1);
y = P(:,2);
v = x.*exp(-x.^2-y.^2);
```

Create the interpolant, specifying linear interpolation and nearest neighbor extrapolation.

```
F = scatteredInterpolant(P,v,'linear','nearest')
```

```
F = 
  scatteredInterpolant with properties:

                 Points: [200×2 double]
                 Values: [200×1 double]
                 Method: 'linear'
    ExtrapolationMethod: 'nearest'
```

Evaluate the interpolant outside the convex hull.

```
vq = F(3.0,-1.5)
```

```
vq = 0.0031
```

Disable extrapolation and evaluate F at the same point.

```
F.ExtrapolationMethod = 'none';
vq = F(3.0,-1.5)
```

```
vq = NaN
```

Definitions

Interpolant

Interpolating function that you can evaluate at query points.

Gridded Data

A set of points that are axis-aligned and ordered.

Scattered Data

A set of points that have no structure among their relative locations.

Full Grid

A grid represented as a set of arrays. For example, you can create a full grid using `ndgrid`.

Grid Vectors

A set of vectors that serve as a compact representation of a grid in `ndgrid` format.

For example, `[X,Y] = ndgrid(xg,yg)` returns a full grid in the matrices `X` and `Y`. You can represent the same grid using the grid vectors `xg` and `yg`.

Tips

- It is quicker to evaluate a `scatteredInterpolant` object `F` at many different sets of query points than it is to compute the interpolations separately using the functions `griddata` or `griddatan`. For example:

  ```
  % Fast to create interpolant F and evaluate multiple times
  F = scatteredInterpolant(X,Y,V)
  v1 = F(Xq1,Yq1)
  v2 = F(Xq2,Yq2)

  % Slower to compute interpolations separately using griddata
  v1 = griddata(X,Y,V,Xq1,Yq1)
  v2 = griddata(X,Y,V,Xq2,Yq2)
  ```

- To change the interpolation sample values or interpolation method, it is more efficient to update the properties of the interpolant object `F` than it is to create a new `scatteredInterpolant` object. When you update `F.Values` or `F.Method`, the underlying Delaunay triangulation of the input data does not change, so you can compute new results quickly.

Algorithms

`scatteredInterpolant` uses a Delaunay triangulation of the scattered sample points to perform interpolation [1].

References

[1] Amidror, Isaac. "Scattered data interpolation methods for electronic imaging systems: a survey." *Journal of Electronic Imaging*. Vol. 11, No. 2, April 2002, pp. 157–176.

See Also

See Also

`griddata` | `griddatan` | `griddedInterpolant` | `meshgrid` | `ndgrid`

Introduced in R2013a

matlab.unittest.Scope class

Package: matlab.unittest

Test scope enumeration class

Description

The `matlab.unittest.Scope` enumeration class provides a means to specify the scope of test execution. The enumeration class contains the following members.

Numeric Representation	Enumeration Member Name	Scope Description
1	`TestMethod`	`TestMethodSetup`, `Test`, and `TestMethodTeardown` methods
2	`TestClass`	`TestClassSetup` and `TestClassTeardown` methods
3	`SharedTestFixture`	shared test fixture `setup` and `teardown` methods

Construction

`matlab.unittest.Scope.`*`MemberName`* creates an instance of the test scope enumeration class.

Examples

Create Instance of Enumeration Class

```
n = matlab.unittest.Scope.TestClass
```

```
n = 

    TestClass
```

Display information about the variables.

```
whos n
  Name      Size            Bytes  Class                    Attributes

  n         1x1                 0  matlab.unittest.Scope
```

See Also

See Also

matlab.unittest.plugins.diagnosticrecord

Introduced in R2017a

sec

Secant of angle in radians

Syntax

```
Y = sec(X)
```

Description

`Y = sec(X)` returns the secant of the elements of `X`. The `sec` function operates element-wise on arrays. The function accepts both real and complex inputs. For real values of `X` in the interval [-Inf, Inf], `sec` returns real values in the interval [-Inf ,-1] and [1,Inf]. For complex values of `X`, `sec` returns complex values. All angles are in radians.

Examples

Plot Secant Function

Plot the secant over the domain $-\pi/2 < x < \pi/2$ and $\pi/2 < x < 3\pi/2$.

```
x1 = -pi/2+0.01:0.01:pi/2-0.01;
x2 = pi/2+0.01:0.01:(3*pi/2)-0.01;
plot(x1,sec(x1),x2,sec(x2)), grid on
```

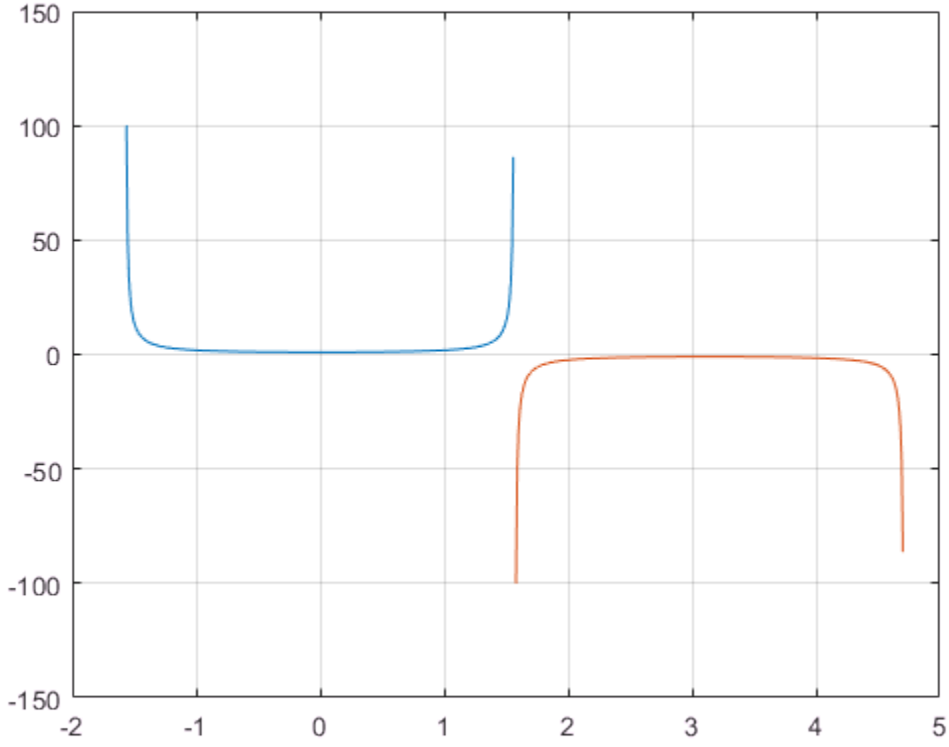

Secant of Vector of Complex Angles

Calculate the secant of the complex angles in vector `x`.

```
x = [-i pi+i*pi/2 -1+i*4];
y = sec(x)
```

```
y =
   0.6481 + 0.0000i  -0.3985 + 0.0000i   0.0198 - 0.0308i
```

Input Arguments

X — Input angle in radians

scalar | vector | matrix | multidimensional array

Input angle in radians, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Secant of input angle

scalar | vector | matrix | multidimensional array

Secant of input angle, returned as real-valued or complex-valued scalar, vector, matrix or multidimensional array.

Definitions

Secant Function

The secant of an angle, α, defined with reference to a right angled triangle is

$$\sec(\alpha) = \frac{1}{\cos(\alpha)} = \frac{\text{hypotenuse}}{\text{adjacent side}} = \frac{h}{b}.$$

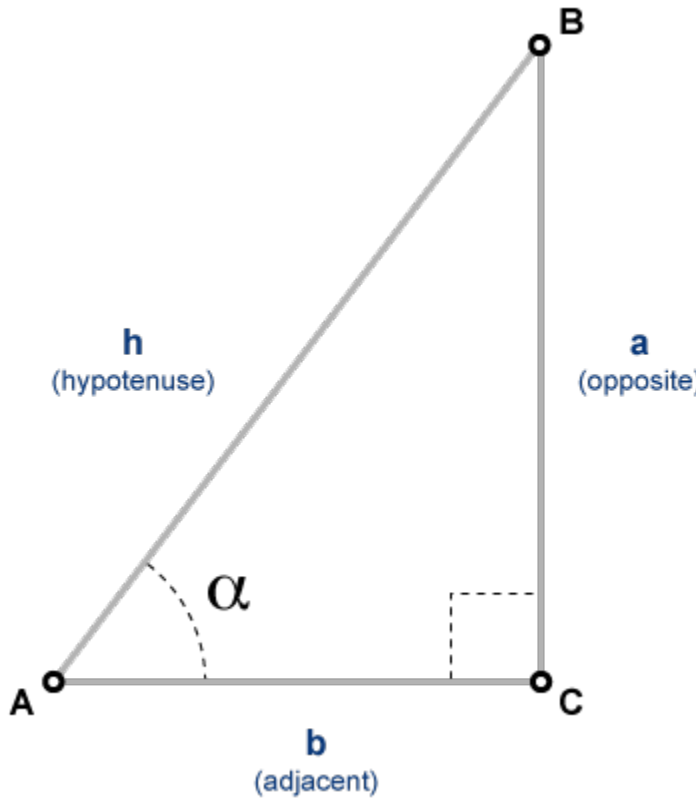

The secant of a complex angle, α, is

$$\sec(\alpha) = \frac{2}{e^{i\alpha} + e^{-i\alpha}}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`asec` | `asecd` | `asech` | `secd` | `sech`

Introduced before R2006a

secd

Secant of argument in degrees

Syntax

```
Y = secd(X)
```

Description

`Y = secd(X)` returns the secant of the elements of `X`, which are expressed in degrees.

Examples

Secant of 90 degrees compared to secant of π/2 radians

```
secd(90)
```

```
ans = Inf
```

```
sec(pi/2)
```

```
ans = 1.6331e+16
```

`secd(90)` is infinite, whereas `sec(pi/2)` is large but finite.

Secant of vector of complex angles, specified in degrees

```
z = [35+i 15+2i 10+3i];
y = secd(z)
```

```
y =
   1.2204 + 0.0149i   1.0346 + 0.0097i   1.0140 + 0.0094i
```

Input Arguments

X — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `secd` operation is element-wise when `X` is nonscalar.

Example:

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Secant of angle

scalar value | vector | matrix | N-D array

Secant of angle, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- In some cases, generated code returns `-Inf` when MATLAB returns `Inf`.
- In some cases, generated code returns `Inf` when MATLAB returns `-Inf`.

See Also

See Also

`asec` | `asecd` | `sec`

Introduced before R2006a

sech

Hyperbolic secant

Syntax

```
Y = sech(X)
```

Description

The `sech` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

`Y = sech(X)` returns an array the same size as `X` containing the hyperbolic secant of the elements of `X`.

Examples

Graph of Hyperbolic Secant Function

Graph the hyperbolic secant over the domain $-2\pi \le x \le 2\pi$.

```
x = -2*pi:0.01:2*pi;
plot(x,sech(x)), grid on
```

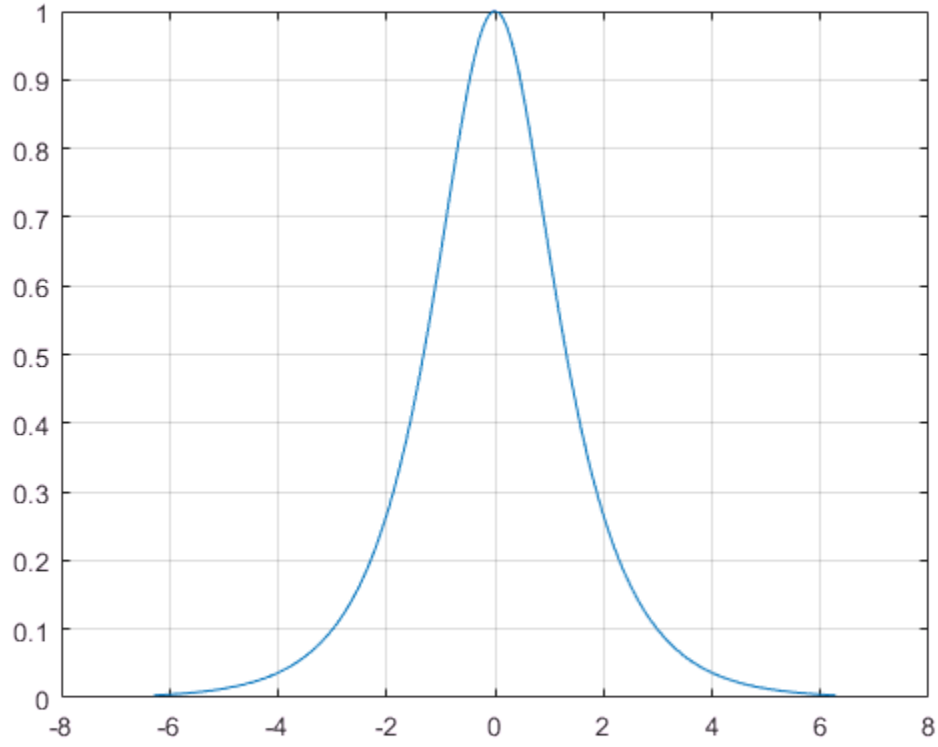

Definitions

Hyperbolic Secant

The hyperbolic secant of z is

$$\operatorname{sech}(z) = \frac{1}{\cosh(z)}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`asech` | `sec` | `sinh` | `cosh`

Introduced before R2006a

second

Second number

Syntax

```
s = second(t)
s = second(t,secondType)
```

Description

`s = second(t)` returns the second values, including a fractional part, for the datetime values in `t`. The `s` output is a `double` array the same size as `t` and contains values from 0 to less than 60.

For datetime values whose time zone is `UTCLeapSeconds`, the `s` output can contain a value between 60 and 61 for times that fall during a leap second occurrence.

`s = second(t,secondType)` returns the type of second number specified by `secondType`.

The `second` function returns the second numbers of datetime values. To assign second values to datetime array `t`, use `t.Second` and modify the Second property.

Examples

Find Second Number of Datetime Values

```
t1 = datetime('now','Format','dd-MMM-yyyy HH:mm:ss.SSS');
t = t1 + seconds(30:15:60)
```

```
t = 1×3 datetime array
   24-Feb-2017 14:06:52.970   24-Feb-2017 14:07:07.970   24-Feb-2017 14:07:22.970
```

```
s = second(t)
```

```
s =
```

```
   52.9700    7.9700   22.9700
```

Input Arguments

`t` — Input date and time
`datetime` array

Input date and time, specified as a `datetime` array.

`secondType` — Type of second values
`'secondofminute'` (default) | `'secondofday'`

Type of second values, specified as either `'secondofminute'` or `'secondofday'`.

- If `secondType` is `'secondofminute'`, then `second` returns the second of the minute.
- If `secondType` is `'secondofday'`, then `second` returns the second of the day, which (except for leap seconds) is in the range [0, 86400).

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also
datetime Properties | `hms` | `hour` | `minute` | `timeofday`

Introduced in R2014b

seconds

Duration in seconds

Syntax

```
S = seconds(X)
```

Description

`S = seconds(X)` returns an array of seconds equivalent to the values in `X`.

- If `X` is a numeric array, then `S` is a `duration` array in units of seconds.
- If `X` is a `duration` array, then `S` is a `double` array with each element equal to the number of seconds in the corresponding element of `X`.

The `seconds` function converts between `duration` and `double` values. To display a duration in units of seconds, set its `Format` property to `'s'`.

Examples

Create Duration Array of Seconds

```
X =  magic(4);
S = seconds(X)
```

```
S = 4×4 duration array
   16 sec    2 sec    3 sec   13 sec
    5 sec   11 sec   10 sec    8 sec
    9 sec    7 sec    6 sec   12 sec
    4 sec   14 sec   15 sec    1 sec
```

Convert Durations to Numeric Array of Seconds

Create a `duration` array.

```
X = hours(1) + minutes(1:4)
```

```
X = 1×4 duration array
   1.0167 hr   1.0333 hr     1.05 hr   1.0667 hr
```

Convert each duration in `X` to a number of seconds.

```
S = seconds(X)
```

```
S =

        3660        3720        3780        3840
```

`S` is a `double` array.

Find the natural logarithm of `S`. The `log` function accepts inputs of type `double`.

```
Y = log(S)
```

```
Y =

    8.2052    8.2215    8.2375    8.2532
```

Input Arguments

X — Input array
numeric array | duration array | logical array

Input array, specified as a numeric array, duration array, or logical array.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`duration`

Introduced in R2014b

selectmoveresize

Select, move, resize, or copy axes and uicontrol graphics objects

Note: The `selectmoveresize` was removed in R2014b. Use the `plotedit` function to copy, move, resize, and edit objects instead.

Syntax

```
A = selectmoveresize
set(gca,'ButtonDownFcn','selectmoveresize')
```

Description

In releases before R2014b, `selectmoveresize` was useful as the callback routine for axes and uicontrol button down functions. It allowed users to move, resize, and copy axes and uicontrol objects.

`A = selectmoveresize` returns a structure array containing

- `A.Type`: Action type, which can be `'Select'`, `'Move'`, `'Resize'`, or `'Copy'`
- `A.Handles`: a list of the selected handles, or, for a `Copy`, an m-by-2 matrix containing the original handles in the first column and the new handles in the second column

`set(gca,'ButtonDownFcn','selectmoveresize')` sets the `ButtonDownFcn` property of the current axes to `'selectmoveresize'`.

See Also

See Also

Axes Properties | `plotedit` | Uicontrol Properties

Introduced before R2006a

matlab.unittest.selectors

Summary of classes in MATLAB Selectors Interface

Description

Use selectors to filter or select elements of a test suite based on their attributes. The `matlab.unittest.selectors` package consists of the following selectors.

matlab.unittest.selectors.HasParameter	Selector for TestSuite elements determined by parameterization
matlab.unittest.selectors.HasSharedTestFixture	Selector for TestSuite elements that use shared test fixture
matlab.unittest.selectors.HasBaseFolder	Selector for TestSuite elements determined by folder
matlab.unittest.selectors.HasName	Selector for TestSuite elements determined by name
matlab.unittest.selectors.HasProcedureName	Selector for `TestSuite` elements determined by procedure name
matlab.unittest.selectors.HasTag	Selector for TestSuite elements determined by tag

See Also

See Also

matlab.unittest.TestSuite.selectIf

matlab.unittest.selectors.HasParameter class

Package: matlab.unittest.selectors

Selector for TestSuite elements determined by parameterization

Description

The `HasParameter` selector filters `TestSuite` array elements determined by parameterization.

Construction

`matlab.unittest.selectors.HasParameter` constructs a selector for `TestSuite` elements determined by their parameterization. When you instantiate `HasParameter` without input arguments, the resulting `TestSuite` array only contains elements that have parameterized test methods.

`matlab.unittest.selectors.HasParameter(Name,Value)` constructs a selector with additional options specified by one or more `Name,Value` pair arguments. The selector filters based on the name of the property that defines a parameter, the name of the parameter, and the value of the parameter. For an element to be selected for the `TestSuite` array, it must have at least one parameter that satisfies all the conditions.

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'Property'`

Name of the property that defines the parameter specified as a character vector or as an instance of the `matlab.unittest.constraints.Constraint` class. If the specified

property name is a character vector, the testing framework creates an `IsEqualTo` constraint with `Property` as the expected value.

`'Name'`

Name of the parameter specified as a character vector or as an instance of the `matlab.unittest.constraints.Constraint` class. If the specified name is a character vector, the testing framework creates an `IsEqualTo` constraint with `Name` as the expected value.

`'Value'`

Value of the parameter specified as any MATLAB data type or as an instance of the `matlab.unittest.constraints.Constraint` class. If the specified property name is not a constraint, the testing framework creates an `IsEqualTo` constraint with the input data, `Value`, as the expected value.

Properties

`PropertyConstraint`

Condition that the test element's parameter property name must satisfy to be included in the test suite, specified as an instance of the `Constraint` in the `Property` input argument.

`NameConstraint`

Condition that the test element's parameter name must satisfy to be included in the test suite, specified as an instance of the `Constraint` in the `Name` input argument.

`ValueConstraint`

Condition that the test element's parameter property value must satisfy to be included in the test suite, specified as an instance of the `Constraint` in the `Value` input argument.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Filter Test Suite by Parameterization

In your working folder, create `testZeros.m`. This class contains four test methods.

```
classdef testZeros < matlab.unittest.TestCase
    properties (TestParameter)
        type = {'single','double','uint16'};
        outSize = struct('s2d',3, 's3d',[2 5 4]);
    end

    methods (Test)
        function testClass(testCase, type, outSize)
            testCase.verifyClass(zeros(outSize,type), type);
        end

        function testSize(testCase, outSize)
            testCase.verifySize(zeros(outSize), outSize);
        end

        function testDefaultClass(testCase)
            testCase.verifyClass(zeros, 'double');
        end
        function testDefaultSize(testCase)
            testCase.verifySize(zeros, [1 1]);
        end

        function testDefaultValue(testCase)
            testCase.verifyEqual(zeros,0);
        end
    end
end
```

The test class contains two parameterized test methods, `testClass` and `testSize`.

At the command prompt, create a test suite from the file.

```
s = matlab.unittest.TestSuite.fromFile('testZeros.m');
{s.Name}'
```

```
ans =

  11×1 cell array
```

```
    'testZeros/testClass(type=single,outSize=s2d)'
    'testZeros/testClass(type=single,outSize=s3d)'
    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
    'testZeros/testClass(type=uint16,outSize=s2d)'
    'testZeros/testClass(type=uint16,outSize=s3d)'
    'testZeros/testSize(outSize=s2d)'
    'testZeros/testSize(outSize=s3d)'
    'testZeros/testDefaultClass'
    'testZeros/testDefaultSize'
    'testZeros/testDefaultValue'
```

The suite contains 11 test elements: 6 from the parameterized `testClass` method, 2 from the parameterized `testSize` method, and 1 from each of the `testDefaultClass`, `testDefaultSize`, and `testDefaultValue` methods.

Select all of the test elements from parameterized test methods.

```
import matlab.unittest.selectors.HasParameter;

s1 = s.selectIf(HasParameter);
{s1.Name}'
```

```
ans =

  8×1 cell array

    'testZeros/testClass(type=single,outSize=s2d)'
    'testZeros/testClass(type=single,outSize=s3d)'
    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
    'testZeros/testClass(type=uint16,outSize=s2d)'
    'testZeros/testClass(type=uint16,outSize=s3d)'
    'testZeros/testSize(outSize=s2d)'
    'testZeros/testSize(outSize=s3d)'
```

The suite contains the eight test elements from the two parameterized test methods.

Select all of the test elements from nonparameterized test methods.

```
s2 = s.selectIf(~HasParameter);
{s2.Name}'
```

```
ans =
```

```
  3×1 cell array

    'testZeros/testDefaultClass'
    'testZeros/testDefaultSize'
    'testZeros/testDefaultValue'
```

Select all test elements that are parameterized and have a property named `'type'` with a parameter name `'double'`.

```
s3 = s.selectIf(HasParameter('Property','type', 'Name','double'));
{s3.Name}'
```

```
ans =

  2×1 cell array

    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
```

The resulting suite contains two elements. The `testClass` method is the only method in `testZeros` that uses the `'type'` property. Selecting only `'double'` from the parameters results in two test elements — one for each value of `'outSize'`.

Select all test elements that a have a parameter defined by a property starting with `'t'`.

```
import matlab.unittest.constraints.StartsWithSubstring;

s4 = s.selectIf(HasParameter('Property',StartsWithSubstring('t')));
{s4.Name}'
```

```
ans =

  6×1 cell array

    'testZeros/testClass(type=single,outSize=s2d)'
    'testZeros/testClass(type=single,outSize=s3d)'
    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
    'testZeros/testClass(type=uint16,outSize=s2d)'
    'testZeros/testClass(type=uint16,outSize=s3d)'
```

The resulting suite contains the six parameterized test elements from the `testClass` method. The `testSize` method is parameterized, but the elements from the method are

not included in the suite because the method does not use a property that starts with `'t'`.

Select all test elements that are parameterized and test the `zeros` function with a `2-D` array. A parameter value representing a `2-D` array has a length of `1` (for example `zeros(3)`) or `2` (for example `zeros(2,3)`).

```
import matlab.unittest.constraints.HasLength;

s5 = s.selectIf(HasParameter('Property','outSize',...
    'Value', HasLength(1)|HasLength(2)));
{s5.Name}'
```

```
ans =

  4×1 cell array

    'testZeros/testClass(type=single,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=uint16,outSize=s2d)'
    'testZeros/testSize(outSize=s2d)'
```

Select only the test element that tests that the output is a `double` data type and that it has the correct size for a `2-D` array.

```
s6 = s.selectIf(HasParameter('Property','type','Name','double')...
    & HasParameter('Property','outSize','Name','s2d'))
```

```
s6 =

  Test with properties:

                  Name: 'testZeros/testClass(type=double,outSize=s2d)'
            BaseFolder: 'C:\work'
         ProcedureName: 'testClass'
    SharedTestFixtures: [0×0 matlab.unittest.fixtures.EmptyFixture]
      Parameterization: [1×2 matlab.unittest.parameters.TestParameter]
                  Tags: {1×0 cell}

Tests Include:
   2 Unique Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

- “Create Basic Parameterized Test”
- “Create Advanced Parameterized Test”

See Also

See Also

fromClass | fromFile | fromFolder | fromMethod | fromPackage | `matlab.unittest.parameters` | `matlab.unittest.selectors` | selectIf

Topics

"Create Basic Parameterized Test"
"Create Advanced Parameterized Test"

Introduced in R2014a

matlab.unittest.selectors.HasSharedTestFixture class

Package: matlab.unittest.selectors

Selector for TestSuite elements that use shared test fixture

Description

The `HasSharedTestFixture` selector filters `TestSuite` array elements based on shared test fixtures.

Construction

`matlab.unittest.selectors.HasSharedTestFixture(f)` constructs a selector for `TestSuite` elements based on their required shared test fixtures. For an element to be selected for the `TestSuite` array, it must use a fixture that is compatible with the specified fixture, `f`.

Input Arguments

`f` — Shared test fixture
`Fixture`

Shared test fixture specified as a `matlab.unittest.fixtures.Fixture` instance. The `TestSuite` array element must use the shared text fixture, `f`, to be selected for the `TestSuite`.

Properties

`ExpectedFixture`

The shared test fixture that a `TestSuite` array element must use to be selected for the `TestSuite`. The `ExpectedFixture` property is specified as a `matlab.unittest.fixtures.Fixture` in the input argument, `f`.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Filter Test Suite by Shared Test Fixtures

Create a package folder, `+mytestpackage`, in your current working folder. This package contains two test classes.

In the `+mytestpackage` folder, create `AExampleTest.m`. This class contains two tests that use a suppressed warnings fixture.

```
classdef (SharedTestFixtures={ ...
        matlab.unittest.fixtures.SuppressedWarningsFixture( ...
        'MATLAB:rmpath:DirNotFound')}) ...
        AExampleTest < matlab.unittest.TestCase
    methods (Test)
        function testOne(testCase)
            % test code
        end
        function testTwo(testCase)
            % test code
        end
    end
end
```

In the `+mytestpackage` folder, create `BExampleTest.m`. This class contains one test that uses a shared path fixture and a suppressed warnings fixture.

```
classdef (SharedTestFixtures={ ...
        matlab.unittest.fixtures.PathFixture( ...
        fullfile(matlabroot,'help','techdoc','matlab_oop','examples')),...
        matlab.unittest.fixtures.SuppressedWarningsFixture( ...
        'MATLAB:rmpath:DirNotFound')}) ...
        BExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testPathAdd(testCase)
            % test code
        end
```

```
    end
end
```

At the command prompt, define the following fixtures.

```
pf = matlab.unittest.fixtures.PathFixture(...
    fullfile(matlabroot,'help','techdoc','matlab_oop','examples'));
swf = matlab.unittest.fixtures.SuppressedWarningsFixture(...
    'MATLAB:rmpath:DirNotFound');
```

Create a test suite from the package.

```
import matlab.unittest.TestSuite;
import matlab.unittest.selectors.HasSharedTestFixture;

suite = TestSuite.fromPackage('mytestpackage')
```

```
suite =

  1×3 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 2 Unique Shared Test Fixture Classes, 0 Tags.
```

The test suite has three test elements.

Create a filtered suite that only contains tests that use the path fixture, `pf`.

```
s1 = suite.selectIf(HasSharedTestFixture(pf));
```

The resulting suite, `s1`, contains the test element from `BExampleTest.m`, since the test in that class uses the shared test fixture, `pf`.

Alternatively, pass the selector to the `TestSuite.fromPackage` method instead of generating a full test suite, and then using the `TestSuite.selectIf` method to filter the suite.

```
s1 = TestSuite.fromPackage('mytestpackage', HasSharedTestFixture(pf));
```

Create a filtered test suite that contains tests that use the suppressed warnings fixture, `swf`, but not the path fixture, `pf`.

```
s2 = suite.selectIf(~HasSharedTestFixture(pf) & HasSharedTestFixture(swf));
```

The test suite, `s2`, only contains the two test elements from `AExampleTest.m`. Tests in `BExampleTest.m` are excluded because, in addition to the suppressed warnings fixture, they use the path fixture.

Create a filtered suite that only contains tests that use the path fixture to a different location.

```
pf2 = matlab.unittest.fixtures.PathFixture(fullfile(matlabroot));
s3 =  TestSuite.fromPackage('mytestpackage', HasSharedTestFixture(pf2))
```

```
s3 =

  1×0 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

The test suite does not contain any test elements. The tests in `BExampleTest.m` use a shared path fixture, but the selected path fixture, `pf2`, adds a different folder to the path so its tests are not included in the suite.

See Also

See Also

fromClass | fromFile | fromFolder | fromMethod | fromPackage | `matlab.unittest.selectors` | selectIf

Introduced in R2014a

matlab.unittest.selectors.HasBaseFolder class

Package: matlab.unittest.selectors

Selector for TestSuite elements determined by folder

Description

The `HasBaseFolder` selector filters `TestSuite` array elements determined by the name of the folder that contains the file that defines the test class or function.

Construction

`matlab.unittest.selectors.HasBaseFolder(f)` constructs a selector for `TestSuite` elements determined by the folder, `f`, which contains the file that defines the test class or function. You can specify the base folder as a character vector or as an instance of the `matlab.unittest.constraints.Constraint` class. If the specified base folder, `f`, is a character vector instead of a `Constraint`, the testing framework creates an `IsEqualTo` constraint with `f`as the expected value.

For a test element to be included in the suite, the file that defines it must be contained in the specified base folder. For test classes defined in packages, the base folder is the parent of the top-level package folder. The base folder never contains any folders that start with `'+'` or `'@'`.

Input Arguments

`f` — Base folder

character vector | `Constraint`

Base folder specified as a character vector or a `matlab.unittest.constraints.Constraint` instance. The following conditions must be satisfied for the test element to be selected for the `TestSuite`:

- If `f` is a character vector, the test element's base folder must exactly match the specified folder.
- If `f` is a constraint, the test element's base folder must satisfy the specified constraint.

Properties

Constraint

Condition the base folder must satisfy to be included in the test suite, specified as an instance of the `matlab.unittest.constraints.Constraints` class.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Filter Test Suite by Base Folder

Create a folder, `MyTests`, in your current working folder. In this folder, create two subfolders, `Feature1` and `Feature2`.

In a new file, `Feature1_Test.m`, in the `Feature1` subfolder, create the following test class.

```
classdef Feature1_Test < matlab.unittest.TestCase
    methods (Test)
        function testA1(testCase)
            % test code
        end
        function testB1(testCase)
            % test code
        end
    end
end
```

In a new file, `Feature2_Test.m`, in the `Feature2` subfolder, create the following test class.

```
classdef Feature2_Test < matlab.unittest.TestCase
    methods (Test)
        function testA2(testCase)
```

```
            % test code
        end
        function testB2(testCase)
            % test code
        end
    end
end
```

If necessary, set your current working folder to the folder above `MyTests`. At the command prompt, create a test suite from the `MyTests` folder and examine the contents.

```
import matlab.unittest.TestSuite
import matlab.unittest.selectors.HasBaseFolder;
import matlab.unittest.constraints.ContainsSubstring;

suite = TestSuite.fromFolder('MyTests', 'IncludingSubfolders', true);
{suite.Name}
```

```
ans =

    'Feature1_Test/testA1'    'Feature1_Test/testB1'    'Feature2_Test/testA2'    'Feat
```

The suite contains the four tests from the two test files.

Select all test suite elements for classes that are defined in the `'Feature1'` folder.

```
 s1 = suite.selectIf(HasBaseFolder(fullfile(pwd,'MyTests','Feature1')));
{s1.Name}
```

```
ans =

    'Feature1_Test/testA1'    'Feature1_Test/testB1'
```

The filtered test suite contains only test elements from the `Feature1` folder.

Select all the test suite elements for classes that are defined in folders that do not contain `'Feature1'`, and then examine the contents.

```
s1 = suite.selectIf(HasBaseFolder(...
    fullfile(pwd,'MyTests','Feature1')));
{s1.Name}
```

```
ans =

    'Feature2_Test/testA2'    'Feature2_Test/testB2'
```

The filtered test suite only contains test elements from the `Feature2` folder.

Alternatively, to generate a filtered suite directly, pass the selector to the `TestSuite.fromFolder` method.

```
s1 = TestSuite.fromFolder('MyTests',...
    ~HasBaseFolder(ContainsSubstring('Feature1')),...
    'IncludingSubfolders',true);
```

See Also

See Also

fromClass | fromFile | fromFolder | fromMethod | fromPackage | `matlab.unittest.selectors` | selectIf

Introduced in R2014a

matlab.unittest.selectors.HasName class

Package: matlab.unittest.selectors

Selector for TestSuite elements determined by name

Description

The `HasName` selector filters `TestSuite` array elements determined by the test element name.

Construction

`matlab.unittest.selectors.HasName(n)` constructs a selector for `TestSuite` elements determined by the test element name, `n`. You can specify the name as a character vector or as an instance of the `matlab.unittest.constraints.Constraint` class. If the specified name, `n`, is a character vector, the testing framework creates an `IsEqualTo` constraint with `n` as the expected value.

For a test element to be included in the suite, the test element must have the same name as the specified name.

Input Arguments

`n` — Test element name
character vector | `Constraint`

Test element name specified as a character vector or `matlab.unittest.constraints.Constraint` instance. The following conditions must be satisfied for the test element to be selected for the `TestSuite`:

- If `n` is a character vector, the test element's name must exactly match the specified name.
- If `n` is a constraint, the test element's name must satisfy the specified constraint.

Properties

Constraint

Condition the test element name must satisfy to be included in the test suite, specified as an instance of the `matlab.unittest.constraints.Constraints` class.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Filter Test Suite by Name

Create the following test class in a file, `ExampleTest.m`, in your current working folder.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testPathAdd(testCase)
            % test code
        end
        function testOne(testCase)
            % test code
        end
         function testTwo(testCase)
            % test code
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest.m` file and examine the contents.

```
import matlab.unittest.TestSuite;
import matlab.unittest.selectors.HasName;
import matlab.unittest.constraints.EndsWithSubstring;

suite = TestSuite.fromFile('ExampleTest.m');
```

```
{suite.Name}
```

```
ans =

  1×3 cell array

    'ExampleTest/testPathAdd'    'ExampleTest/testOne'    'ExampleTest/testTwo'
```

The suite contains three tests.

Select all the test suite elements that have the name `'ExampleTest/testPathAdd'`, and examine the contents.

```
s1 = suite.selectIf(HasName('ExampleTest/testPathAdd'));
{s1.Name}
```

```
ans =

  cell

    'ExampleTest/testPathAdd'
```

The filtered test suite only contains one test element.

Select all the test suite elements that end in either `'One'` or `'Two'`, and examine the contents.

```
s1 =  suite.selectIf(HasName(EndsWithSubstring('One')) | ...
    HasName(EndsWithSubstring('Two')));
{s1.Name}
```

```
ans =

  1×2 cell array

    'ExampleTest/testOne'    'ExampleTest/testTwo'
```

At the time of the test suite construction, create a test suite that only contains tests with the substring `'One'`.

```
import matlab.unittest.constraints.ContainsSubstring;
s2 = TestSuite.fromFile('ExampleTest.m',...
    HasName(ContainsSubstring('One')))
```

```
s2 =
```

```
  Test with properties:

                 Name: 'ExampleTest/testOne'
           BaseFolder: 'C:\work'
        ProcedureName: 'testOne'
    SharedTestFixtures: [0×0 matlab.unittest.fixtures.EmptyFixture]
      Parameterization: [0×0 matlab.unittest.parameters.EmptyParameter]
                 Tags: {1×0 cell}

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

See Also

See Also

fromClass | fromFile | fromFolder | fromMethod | fromPackage | `matlab.unittest.selectors` | selectIf

Introduced in R2014a

matlab.unittest.selectors.HasProcedureName class

Package: matlab.unittest.selectors

Selector for `TestSuite` elements determined by procedure name

Description

The `HasProcedureName` selector filters `TestSuite` array elements determined by the procedure name. The name of the test procedure does not include any class or package name or information about parameterization. In a class-based test, the procedure name is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title.

Construction

`matlab.unittest.selectors.HasProcedureName(n)` constructs a selector for `TestSuite` elements determined by the procedure name, `n`.

For a test element to be included in the suite, the procedure name of the test element must match the specified name or satisfy the specified constraint.

Input Arguments

n — Procedure name
string scalar | character vector | instance of `matlab.unittest.constraints.Constraint`

Procedure name specified as a string scalar, character vector, or an instance of `matlab.unittest.constraints.Constraint`. The name of the test procedure does not include any class or package name or information about parameterization. In a class-based test, the procedure name is the name of the test method. In a function-based test, it is the name of the local function that contains the test. In a script-based test, it is the name of a test section.

Example: `"Test1"`

Example: `ContainsSubstring('Test')`

Properties

`Constraint` — Condition procedure name must satisfy
instance of `matlab.unittest.constraints.Constraints` class

Condition the procedure name must satisfy to be included in the test suite, specified as an instance of the `matlab.unittest.constraints.Constraints` class.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Filter Test Suite by Procedure Name

Create the following test class in a file, `ExampleTest.m`, in your current working folder.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testPathAdd(testCase)
            % test code
        end
        function testOne(testCase)
            % test code
        end
         function testTwo(testCase)
            % test code
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest.m` file and examine the contents.

```
import matlab.unittest.TestSuite;
```

```
import matlab.unittest.selectors.HasProcedureName;
import matlab.unittest.constraints.EndsWithSubstring;

suite = TestSuite.fromFile('ExampleTest.m');
{suite.Name}
```

```
ans =

  1×3 cell array

    'ExampleTest/testPathAdd'    'ExampleTest/testOne'    'ExampleTest/testTwo'
```

The suite contains three tests.

Select all the test suite elements that have the procedure name `testPathAdd`, and examine the contents.

```
s1 = suite.selectIf(HasProcedureName("testPathAdd"))
```

```
s1 =

  Test with properties:

                 Name: 'ExampleTest/testPathAdd'
           BaseFolder: 'C:\work'
        ProcedureName: 'testPathAdd'
    SharedTestFixtures: [0×0 matlab.unittest.fixtures.EmptyFixture]
      Parameterization: [0×0 matlab.unittest.parameters.EmptyParameter]
                 Tags: {1×0 cell}

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

The filtered test suite only contains one test element.

Select all the test suite elements with a procedure name that ends in either `'One'` or `'Two'`, and examine the contents.

```
s1 =  suite.selectIf(HasProcedureName(EndsWithSubstring('One')) | ...
    HasProcedureName(EndsWithSubstring('Two')));
{s1.Name}
```

```
ans =

  1×2 cell array
```

```
    'ExampleTest/testOne'    'ExampleTest/testTwo'
```

At the time of the test suite construction, create a test suite that only contains tests with the substring `'One'`.

```
import matlab.unittest.constraints.ContainsSubstring;
s2 = TestSuite.fromFile('ExampleTest.m',...
    HasProcedureName(ContainsSubstring('One')))
```

```
s2 =

  Test with properties:

                 Name: 'ExampleTest/testOne'
           BaseFolder: 'C:\work'
        ProcedureName: 'testOne'
    SharedTestFixtures: [0×0 matlab.unittest.fixtures.EmptyFixture]
      Parameterization: [0×0 matlab.unittest.parameters.EmptyParameter]
                 Tags: {1×0 cell}

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

Alternatives

Use the `HasProcedureName` selector for maximum flexibility to create test suites from procedure names. Alternatively, at the time of test suite construction, you can filter the test suite Using the `'ProcedureName'` name-value pair. For example, the following lines of code are functionally equivalent.

```
s = TestSuite.fromClass(?ExampleTest,'ProcedureName','Test1');
s = testsuite('ExampleTest.m','ProcedureName','Test1');
```

See Also

See Also

fromClass | fromFile | fromFolder | fromMethod | fromPackage | `matlab.unittest.selectors` | selectIf

Introduced in R2017a

matlab.unittest.selectors.HasTag class

Package: matlab.unittest.selectors

Selector for TestSuite elements determined by tag

Description

The `HasTag` selector filters `TestSuite` array elements determined by the test element tag.

Construction

`matlab.unittest.selectors.HasTag` constructs a selector for `TestSuite` elements determined by the test element tag. When you instantiate `HasTag` without input arguments, the resulting `TestSuite` array contains only elements with one or more tags.

`matlab.unittest.selectors.HasTag(t)` constructs a selector for `TestSuite` elements determined by the test element tag, `t`. You can specify the name as a character vector or as an instance of the `matlab.unittest.constraints.Constraint` class. If the specified name, `t`, is a character vector, the testing framework creates an `IsEqualTo` constraint `t` as the expected value.

For a test element to be included in the suite, the test element must be tagged with the specified character vector or with a value that satisfies the specified constraint.

Input Arguments

`t` — Test element tag
character vector | `Constraint`

Test element tag, specified as a character vector or `matlab.unittest.constraints.Constraint` instance. If a test element tag meets the following conditions, the `TestSuite` contains the test:

- If `t` is a character vector, the test element tag is the specified value.

- If `t` is a constraint, the test element tag is a value that satisfies the specified constraint.

Properties

`Constraint` — Condition test element tag must satisfy

instance of `matlab.unittest.constraints.Constraints` class

Condition the test element tag must satisfy to be included in the test suite, specified as an instance of the `matlab.unittest.constraints.Constraints` class.

Copy Semantics

Value. To learn how value classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Filter Test Suite by Tag

Create the following test class in a file, `ExampleTest.m`, in your current working folder.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods (Test)
        function testA (testCase)
            % test code
        end
    end
    methods (Test, TestTags = {'Unit'})
        function testB (testCase)
            % test code
        end
        function testC (testCase)
            % test code
        end
    end
    methods (Test, TestTags = {'Unit','FeatureA'})
```

```
        function testD (testCase)
            % test code
        end
    end
    methods (Test, TestTags = {'System','FeatureA'})
        function testE (testCase)
            % test code
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class and examine the contents.

```
import matlab.unittest.TestSuite
import matlab.unittest.selectors.HasTag

suite = TestSuite.fromClass(?ExampleTest)
```

```
suite =

  1×5 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 3 Unique Tags.
```

Click the hyperlink for `3 Unique Tags` to display all the tags in the suite.

```
       Tag
    __________

    'FeatureA'
    'System'
    'Unit'
```

Select all the test suite elements that have the tag `'Unit'`.

```
s1 = suite.selectIf(HasTag('Unit'))
```

```
s1 =

  1×3 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 2 Unique Tags.
```

Select all the test suite elements that do not contain the tag `'FeatureA'`.

```
s2 =  suite.selectIf(~HasTag('FeatureA'));
{s2.Name}
```

```
ans =

  1×3 cell array

    'ExampleTest/testB'    'ExampleTest/testC'    'ExampleTest/testA'
```

Select all the test suite elements that have no tags.

```
s3 =  suite.selectIf(~HasTag)
```

```
s3 =

  Test with properties:

                 Name: 'ExampleTest/testA'
           BaseFolder: 'C:\work'
        ProcedureName: 'testA'
    SharedTestFixtures: [0×0 matlab.unittest.fixtures.EmptyFixture]
      Parameterization: [0×0 matlab.unittest.parameters.EmptyParameter]
                  Tags: {1×0 cell}

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

- “Tag Unit Tests”

Alternatives

Use the `HasTag` selector for maximum flexibility to create test suites from tags. Alternatively, at the time of test suite construction, you can filter the test suite Using the `'Tag'` name-value pair. For example,

```
s = TestSuite.fromClass(?ExampleTest,'Tag','Unit');
```

You can also select and run tagged tests using the `'Tag'` name-value pair with the `runtests` function. For example,

```
runtests('ExampleTest.m','Tag','Unit')
```

See Also

See Also

fromClass | fromFile | fromFolder | fromMethod | fromPackage | `matlab.unittest.selectors` | selectIf

Topics

"Tag Unit Tests"

Introduced in R2015a

semilogx

Semilogarithmic plot



Syntax

```
semilogx(Y)
semilogx(X1,Y1,...)
semilogx(X1,Y1,LineSpec,...)
semilogx(...,'PropertyName',PropertyValue,...)
semilogx(ax,...)
h = semilogx(...)
```

Description

`semilogx` plot data as logarithmic scales for the *x*-axis.

`semilogx(Y)` creates a plot using a base 10 logarithmic scale for the *x*-axis and a linear scale for the *y*-axis. It plots the columns of `Y` versus their index. The values in `Y` can be numeric, datetime, duration, or categorical values. If `Y` contains complex values, then `semilogx(Y)` is equivalent to `semilogx(real(Y),imag(Y))`. The `semilogx` function ignores the imaginary component in all other uses of this function.

`semilogx(X1,Y1,...)` plots all `Yn` versus `Xn` pairs. If only one of `Xn` or `Yn` is a matrix, `semilogx` plots the vector argument versus the rows or columns of the matrix, along the dimension of the matrix whose length matches the length of the vector. If the matrix is square, its columns plot against the vector if their lengths match. The values in `Yn` can be numeric, datetime, duration, or categorical values. The values in `Xn` must be numeric.

`semilogx(X1,Y1,LineSpec,...)` plots all lines defined by the `Xn,Yn,LineSpec` triples. `LineSpec` determines line style, marker symbol, and color of the plotted lines.

`semilogx(...,'PropertyName',PropertyValue,...)` sets property values for all charting lines created by `semilogx`. For a list of properties, see Chart Line Properties.

`semilogx(ax,...)` creates the line in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = semilogx(...)` return a vector of chart line objects.

Examples

Logarithmic Scale for x-Axis

Create a plot with a logarithmic scale for the x-axis and a linear scale for the y-axis.

```
x = 0:1000;
y = log(x);

figure
semilogx(x,y)
```

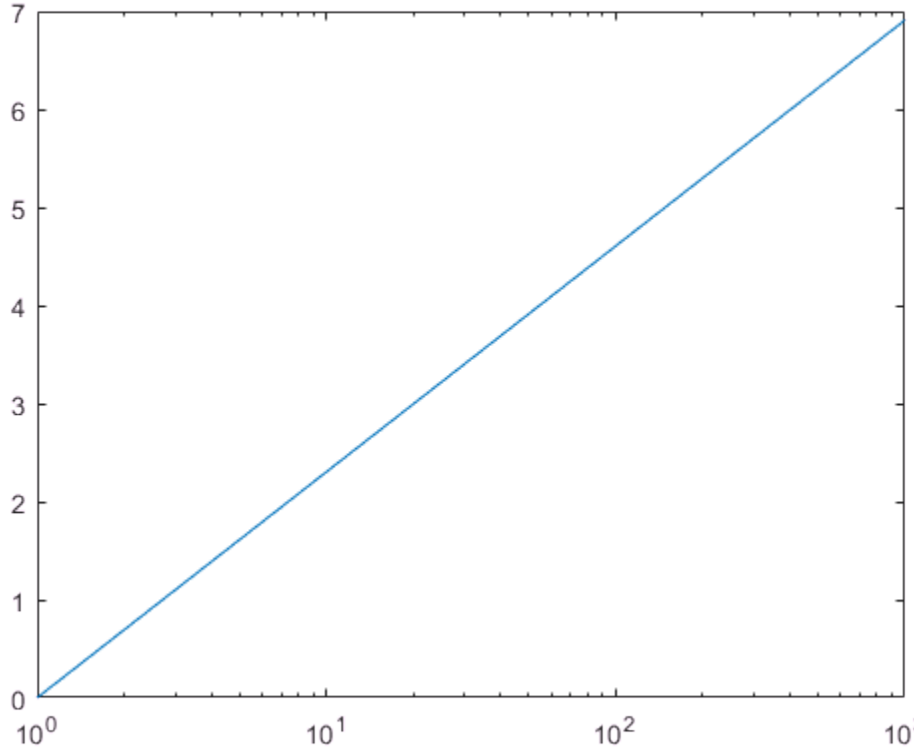

- "Plot Dates and Durations"
- "Plot Categorical Data"

Tips

If you do not specify a color when plotting more than one line, `semilogx` automatically cycle through the colors and line styles in the order specified by the current axes ColorOrder and LineStyleOrder properties.

You can mix `Xn,Yn` pairs with `Xn,Yn,`*`LineSpec`* triples; for example,

```
semilogx(X1,Y1,X2,Y2,LineSpec,X3,Y3)
```

If you attempt to add a `loglog`, `semilogx`, or `semilogy` plot to a linear axis mode graph with `hold on`, the axis mode remains as it is and the new data plots as linear.

See Also

See Also

Functions

`LineSpec` | `loglog` | `plot` | `semilogy`

Properties

Chart Line Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

semilogy

Semilogarithmic plot



Syntax

```
semilogy(Y)
semilogy(X1,Y1,...)
semilogy(X1,Y1,LineSpec,...)
semilogy(...,'PropertyName',PropertyValue,...)
semilogy(ax,...)
h = semilogy(...)
```

Description

`semilogy` plots data with logarithmic scale for the *y*-axis.

`semilogy(Y)` creates a plot using a base 10 logarithmic scale for the *y*-axis and a linear scale for the *x*-axis. It plots the columns of `Y` versus their index. If `Y` contains complex values, then `semilogy(Y)` is equivalent to `semilogy(real(Y),imag(Y))`. The `semilogy` function ignores the imaginary component in all other uses of this function.

`semilogy(X1,Y1,...)` plots all `Yn` versus `Xn` pairs. If only one of `Xn` or `Yn` is a matrix, `semilogy` plots the vector argument versus the rows or columns of the matrix, along the dimension of the matrix whose length matches the length of the vector. If the matrix is square, its columns plot against the vector if their lengths match. The values in `Xn` can be numeric, datetime, duration, or categorical values. The values in `Yn` must be numeric.

`semilogy(X1,Y1,LineSpec,...)` plots all lines defined by the `Xn,Yn,LineSpec` triples. `LineSpec` determines line style, marker symbol, and color of the plotted lines.

`semilogy(...,'PropertyName',PropertyValue,...)` sets property values for all the charting lines created by `semilogy`. For a list of properties, see Chart Line Properties.

`semilogy(ax,...)` creates the line in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = semilogy(...)` returns a vector of chart line objects.

Examples

Logarithmic Scale for y-Axis

Create a plot with a logarithmic scale for the y-axis and a linear scale for the x-axis.

```
x = 0:0.1:10;
y = exp(x);

figure
semilogy(x,y)
```

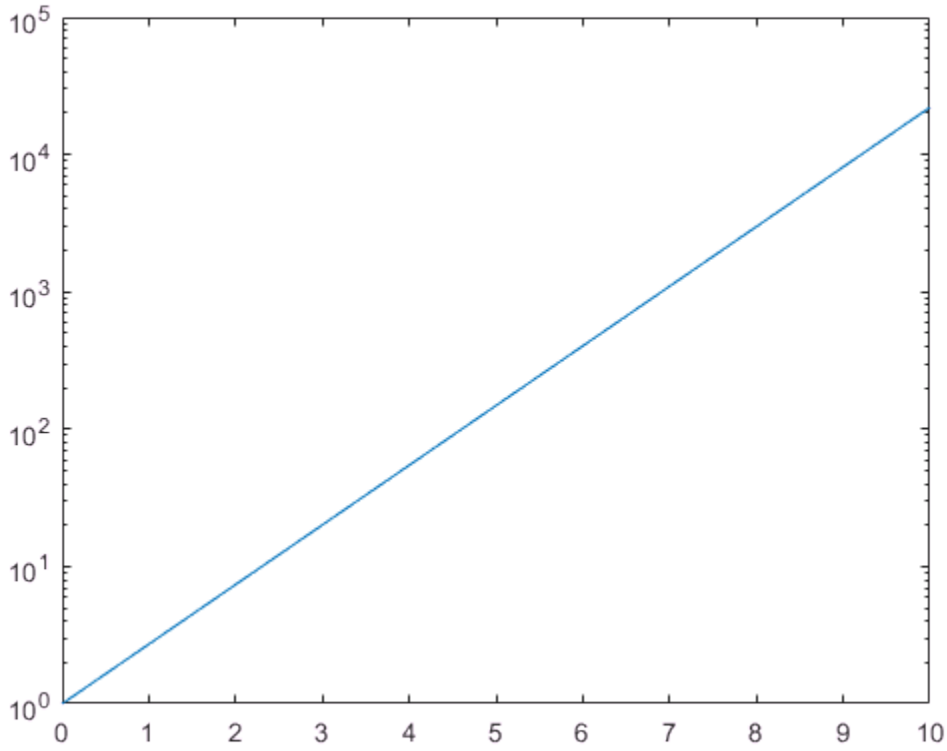

- "Plot Dates and Durations"
- "Plot Categorical Data"

Tips

If you do not specify a color when plotting more than one line, `semilogy` automatically cycle through the colors and line styles in the order specified by the current axes ColorOrder and LineStyleOrder properties.

You can mix `Xn,Yn` pairs with `Xn,Yn,`*`LineSpec`* triples; for example,

```
semilogy(X1,Y1,X2,Y2,LineSpec,X3,Y3)
```

If you attempt to add a `loglog`, `semilogx`, or `semilogy` plot to a linear axis mode graph with `hold on`, the axis mode remains as it is and the new data plots as linear.

See Also

See Also

Functions

`LineSpec` | `loglog` | `plot` | `semilogx`

Properties

Chart Line Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

sendmail

Send email message to address list

Syntax

```
sendmail(recipients,subject)
sendmail(recipients,subject,message)
sendmail(recipients,subject,message,attachments)
```

Description

`sendmail(recipients,subject)` sends email to `recipients` with the specified `subject`. The `recipients` input is a character vector for a single address, or a cell array of character vectors for multiple addresses.

`sendmail(recipients,subject,message)` includes the specified `message`. If `message` is a character vector, `sendmail` automatically wraps text at 75 characters. To force a line break in the message text, use `10`, as shown in the Examples. If `message` is a cell array of character vectors, each cell represents a new line of text.

`sendmail(recipients,subject,message,attachments)` attaches the files listed in the character vector or cell array `attachments`.

Examples

Send a message with two attachments to a hypothetical email address:

```
sendmail('user@otherdomain.com',...
         'Test subject','Test message',...
         {'folder/attach1.html','attach2.doc'});
```

Send a message with forced line breaks (using `10`) to a hypothetical email address:

```
sendmail('user@otherdomain.com','New subject', ...
        ['Line1 of message' 10 'Line2 of message' 10 ...
```

```
        'Line3 of message' 10 'Line4 of message']);
```

The resulting message is:

```
Line1 of message
Line2 of message
Line3 of message
Line4 of message
```

Tips

- The `sendmail` function does not support HTML-formatted messages. However, you can send HTML files as attachments.
- If `sendmail` cannot determine your email address or outgoing SMTP mail server from your system registry, specify those settings using the `setpref` function. For example:

  ```
  setpref('Internet','SMTP_Server','my_server.example.com');
  setpref('Internet','E_mail','my_email@example.com');
  ```

  To identify the SMTP server for the call to `setpref`, check the preferences for your electronic mail application, or consult your email system administrator. If you cannot easily determine the server name, try `'mail'`, which is a common default, such as:

  ```
  setpref('Internet','SMTP_Server','mail');
  ```
- By default, the `sendmail` function does not support email servers that require authentication. To support these servers, change your system settings and set preferences for the SMTP user name and password, with commands in the following form:

  ```
  props = java.lang.System.getProperties;
  props.setProperty('mail.smtp.auth','true');

  setpref('Internet','SMTP_Username','myaddress@example.com');
  setpref('Internet','SMTP_Password','mypassword');
  ```
- To override the default character encoding, set the preference for email character encoding as follows:

  ```
  setpref('Internet','E_mail_Charset',encoding);
  ```
  where *`encoding`* is a character vector specifying the character encoding, such as `'SJIS'`.

Alternatives

On Windows systems with Microsoft Outlook®, you can send email directly through Outlook by accessing the COM server with `actxserver`. For an example, see Solution 1-RTY6J.

See Also

`getpref` | `setpref`

Topics

"Specify Proxy Server Settings for Connecting to the Internet"

serial

Create serial port object

Syntax

```
obj = serial('port')
obj = serial('port','PropertyName',PropertyValue,...)
```

Description

`obj = serial('port')` creates a serial port object associated with the serial port specified by *`port`*. If *`port`* does not exist, or if it is in use, you will not be able to connect the serial port object to the device.

`Port` object name will depend upon the platform that the serial port is on. The Instrument Control Toolbox™ function `instrhwinfo` ('serial') provides a list of available serial ports. This list is an example of serial constructors on different platforms:

Platform	Serial Port Constructor
Linux 64	`serial('/dev/ttyS0');`
Mac OS X 64	`serial('/dev/tty.KeySerial1');`
Windows 64	`serial('com1');`

`obj = serial('port','PropertyName',PropertyValue,...)` creates a serial port object with the specified property names and property values. If an invalid property name or property value is specified, an error is returned and the serial port object is not created.

Examples

This example creates the serial port object `s1` associated with the serial port COM1 on a Windows platform.

```
s1 = serial('COM1');
```

The `Type`, `Name`, and `Port` properties are automatically configured.

```
get(s1,{'Type','Name','Port'})
ans =
    'serial'    'Serial-COM1'    'COM1'
```

To specify properties during object creation

```
s2 = serial('COM2','BaudRate',1200,'DataBits',7);
```

Tips

When you create a serial port object, these property values are automatically configured:

- The `Type` property is given by `serial`.
- The `Name` property is given by concatenating `Serial` with the port specified in the `serial` function.
- The `Port` property is given by the port specified in the `serial` function.

You can specify the property names and property values using any format supported by the `set` function. For example, you can use property name/property value cell array pairs. Additionally, you can specify property names without regard to case, and you can make use of property name completion. For example, the following commands are all valid on a Windows platform.

```
s = serial('COM1','BaudRate',4800);
s = serial('COM1','baudrate',4800);
s = serial('COM1','BAUD',4800);
```

Refer to Configuring Property Values for a list of serial port object properties that you can use with `serial`.

Before you can communicate with the device, it must be connected to `obj` with the `fopen` function. A connected serial port object has a `Status` property value of `open`. An error is returned if you attempt a read or write operation while the object is not connected to the device. You can connect only one serial port object to a given serial port.

See Also

`fclose` | `fopen` | `seriallist` | `Name` | `Port` | `Status` | `Type`

Introduced before R2006a

serialbreak

Send break to device connected to serial port

Syntax

```
serialbreak(obj)
serialbreak(obj,time)
```

Description

`serialbreak(obj)` sends a break of 10 milliseconds to the device connected to the serial port object, `obj`.

`serialbreak(obj,time)` sends a break to the device with a duration, in milliseconds, specified by `time`. Note that the duration of the break might be inaccurate under some operating systems.

Tips

For some devices, the break signal provides a way to clear the hardware buffer.

Before you can send a break to the device, it must be connected to `obj` with the `fopen` function. A connected serial port object has a `Status` property value of `open`. An error is returned if you attempt to send a break while `obj` is not connected to the device.

`serialbreak` is a synchronous function, and blocks the command line until execution is complete.

If you issue `serialbreak` while data is being asynchronously written, an error is returned. In this case, you must call the `stopasync` function or wait for the write operation to complete.

See Also

`fopen` | `stopasync` | `Status`

Introduced before R2006a

seriallist

List of serial ports connected to your system

Syntax

```
seriallist
```

Description

`seriallist` returns a list of all serial ports on a system. The list includes virtual serial ports provided by USB-to-serial devices and Bluetooth Serial Port Profile devices. This provides a list of the serial ports that you have access to on your computer and could use for serial port communication.

Examples

Display List of Serial Ports

The `seriallist` function displays a list of all serial ports on a system.

Display available serial ports.

```
seriallist
```

```
ans =

  1×2 string array

  "COM1"    "COM3"
```

You can now create a `serial` object and communicate over the serial port.

- “Create a Serial Port Object”

See Also

See Also

`serial`

Topics

"Create a Serial Port Object"
"Overview of the Serial Port"

Introduced in R2017a

set

Set graphics object properties

Syntax

```
set(H,Name,Value)
set(H,NameArray,ValueArray)
set(H,S)
s = set(H)
values = set(H,Name)
```

Description

Note: Do not use the `set` function on Java objects as it will cause a memory leak. For more information, see "Access Public and Private Data".

`set(H,Name,Value)` specifies a value for the property `Name` on the object identified by `H`. Use single quotes around the property name, for example, `set(H,'Color','red')`. If `H` is a vector of objects, then `set` sets the property for all the objects. If `H` is empty (that is, `[]`), `set` does nothing, but does not return an error or warning.

`set(H,NameArray,ValueArray)` specifies multiple property values using the cell arrays `NameArray` and `ValueArray`. To set `n` property values on each of `m` graphics objects, specify `ValueArray` as an `m`-by-`n` cell array, where `m = length(H)` and `n` is equal to the number of property names contained in `NameArray`.

`set(H,S)` specifies multiple property values using `S`, where `S` is a structure whose field names are the object property names and whose field values are the corresponding property values. MATLAB ignores empty structures.

`s = set(H)` returns the user-settable properties and possible values for the object identified by `H`. `s` is a structure array whose field names are the object's property names and whose field values are the possible values of the corresponding properties. If you do not specify an output argument, the MATLAB software displays the information on the screen. `H` must be a single object.

`values = set(H,Name)` returns the possible values for the specified property. If the possible values are character vectors, `set` returns each in a cell of the cell array `values`. For other properties, `set` returns a statement indicating that `Name` does not have a fixed set of property values. If you do not specify an output argument, MATLAB displays the information on the screen. `H` must be a single object.

Note: For more information about properties you can set, see the property pages for each object, for example, Figure Properties, Axes Properties, Chart Line Properties, Text Properties, and so on.

Examples

Change Color of Specific Line

Plot a line and return the chart line object as `p`. Set the `Color` property of the line to `'red'`.

```
p = plot(1:10);
set(p,'Color','red')
```

Change Color for Multiple Lines

Create a plot with four lines using random data and return the four chart line objects as `P`. Set the `Color` property for all of the lines to `'red'`.

```
P = plot(rand(4));
set(P,'Color','red')
```

Set Line Style to Different Value for Multiple Lines

Set the value of the `LineStyle` property for four chart line objects each to a different value. Transpose the value of the cell array so that it has the proper shape.

```
P = plot(rand(4));
NameArray = {'LineStyle'};
ValueArray = {'-','--',':','-.'}';
set(P,NameArray,ValueArray)
```

Set Different Values for Multiple Properties on Multiple Objects

Set the values of the `Marker` and `Tag` properties on three different stem series objects to different values. Each row of the value cell array corresponds to an object in `h` and contains two values, one for the `Marker` property and one for the `Tag` property.

```
x = 0:30;
y = [1.5*cos(x); 4*exp(-.1*x).*cos(x); exp(.05*x).*cos(x)]';
S = stem(x,y);
NameArray = {'Marker','Tag'};
ValueArray = {'o','Decaying Exponential';...
   'square','Growing Exponential';...
   '*','Steady State'};
set(S,NameArray,ValueArray)
```

Tips

You can use any combination of property name/property value pairs, structure arrays, and cell arrays in one call to `set`.

Setting Property Units

Note that if you are setting both the `FontSize` and the `FontUnits` properties in one function call, you must set the `FontUnits` property first so that the MATLAB software can correctly interpret the specified `FontSize`. The same applies to figure and axes units — always set the `Units` property before setting properties whose values you want to be interpreted in those units. For example,

```
f = figure('Units','characters','Position',[30 30 120 35]);
```

See Also

See Also

`findobj` | `gca` | `gcbo` | `gcf` | `gco` | `get`

Topics

"Graphics Object Properties"

Introduced before R2006a

set

Set property values for `audioplayer` object

Syntax

```
set(obj,Name,Value)
set(obj,cellOfNames,cellOfValues)
set(obj,structOfProperties)
settableProperties = set(obj)
```

Description

`set(obj,Name,Value)` sets the named property to the specified value for the object *`obj`*.

`set(obj,cellOfNames,cellOfValues)` sets the properties listed in the cell array *`cellOfNames`* to the corresponding values in the cell array *`cellOfValues`*. Each cell array must contain the same number of elements.

`set(obj,structOfProperties)` sets the properties identified by each field of the structure array *`structOfProperties`* to the values of the associated fields.

`settableProperties` `= set(obj)` returns the names of the properties that you can set in a structure array. The field names of *`settableProperties`* are the property names.

Examples

View the list of properties that you can set for an `audioplayer` object:

```
load handel.mat;
handelObj = audioplayer(y, Fs);
set(handelObj)
```

Set the `Tag` and `UserData` properties of an `audioplayer` object using a structure array:

```
newValues.Tag = 'My Tag';
newValues.UserData = {'My User Data', pi, [1 2 3 4]};

load handel.mat;
handelObj = audioplayer(y, Fs);
set(handelObj, newValues)

% View the values all properties.
get(handelObj)
```

Tips

The `set` function allows combinations of property name/value pairs, cell array pairs, and structure arrays in the same function call.

Alternatives

To set the value of a single property, you can use dot notation. Reference each property as though it is a field of a structure array. For example, set the `Tag` property for an object called `handelObj` (as created in the Examples):

```
handelObj.Tag = 'This is my tag.';
```

This command is exactly equivalent to:

```
set(handelObj, 'Tag', 'This is my tag.');
```

See Also

`audioplayer` | get

set

Set property values for `audiorecorder` object

Syntax

```
set(obj,Name,Value)
set(obj,cellOfNames,cellOfValues)
set(obj,structOfProperties)
settableProperties = set(obj)
```

Description

`set(obj,Name,Value)` sets the named property to the specified value for the object *`obj`*.

`set(obj,cellOfNames,cellOfValues)` sets the properties listed in the cell array *`cellOfNames`* to the corresponding values in the cell array *`cellOfValues`*. Each cell array must contain the same number of elements.

`set(obj,structOfProperties)` sets the properties identified by each field of the structure array *`structOfProperties`* to the values of the associated fields.

`settableProperties` `= set(obj)` returns the names of the properties that you can set in a structure array. The field names of *`settableProperties`* are the property names.

Examples

View the list of properties that you can set for an `audiorecorder` object:

```
recorderObj = audiorecorder;
set(recorderObj)
```

Set the `Tag` and `UserData` properties of an `audiorecorder` object using a structure array:

```
newValues.Tag = 'My Tag';
newValues.UserData = {'My User Data', pi, [1 2 3 4]};

recorderObj = audiorecorder;
set(recorderObj, newValues)

% View the values all properties.
get(recorderObj)
```

Tips

The `set` function allows combinations of property name/value pairs, cell array pairs, and structure arrays in the same function call.

Alternatives

To set the value of a single property, you can use dot notation. Reference each property as though it is a field of a structure array. For example, set the `Tag` property for an object called `recorderObj` (as created in the Examples):

```
recorderObj.Tag = 'This is my tag.';
```

This command is exactly equivalent to:

```
set(recorderObj, 'Tag', 'This is my tag.');
```

See Also

`audiorecorder` | get

set (COM)

Set object or interface property to specified value

Syntax

```
set(h,'pname',value)
set(h,'pname1',value1,'pname2',value2,...)
```

Description

`set(h,'pname',value)` sets property `pname` to `value`.

`set(h,'pname1',value1,'pname2',value2,...)` sets each property `pname1,pname2,...` to the corresponding `value1,value2,...`.

For information on how MATLAB converts workspace matrices to COM data types, see "Handle COM Data in MATLAB".

COM functions are available on Microsoft Windows systems only.

Examples

Create an `mwsamp` control and use `set` to change the `Label` and `Radius` properties with a single statement.

```
f = figure('position',[100 200 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.1',[0 0 200 200],f);

set(h,'Label','Click to fire event','Radius',40);
Redraw(h)
```

Alternatively:

```
h.Label = 'Click to fire event';
h.Radius = 40;
Redraw(h)
```

See Also

`get (COM)` | `inspect` | `isprop` | `addproperty` | `deleteproperty`

Introduced before R2006a

matlab.mixin.SetGet class

Package: matlab.mixin

Provide handle classes with set and get methods

Note: `hgsetget` will be removed in a future release. Use `matlab.mixin.SetGet` instead.

Description

`classdef` *`MySubClass`* `<` `matlab.mixin.SetGet` subclasses the `matlab.mixin.SetGet` class. `matlab.mixin.SetGet` is a subclass of the `handle` class.

Use the `matlab.mixin.SetGet` class to derive classes that inherit `set` and `get` methods that behave like MATLAB graphics `set` and `get` functions.

The `set` and `get` methods inherited from `matlab.mixin.SetGet` support inexact property name matching. You can use a combination of partial and case-insensitive names as long as the inexact name is not ambiguous. Dot-based property references require exact property name matches.

Methods

Method	Purpose
set	Assigns values to the specified properties or returns a cell array of possible values for writable properties.
get	Returns value of specified property or a `struct` with all property values.
setdisp	Implicitly called when `set` is called with no output arguments and a handle array, but no property name. Override this method to change what set displays.

Method	Purpose
getdisp	Implicitly called when `get` is called with no output arguments and handle array, but no property name. Override this method to change what get displays.

Attributes

`Abstract`	`true`
`ConstructOnLoad`	`true`
`HandleCompatible`	`true`

To learn about attributes of classes, see Class Attributes in the MATLAB Object-Oriented Programming documentation.

Copy Semantics

Handle. To learn how handle classes affect copy operations, see “Using Handles” in the MATLAB documentation.

See Also

See Also

matlab.mixin.SetGetExactNames

Topics

“Implement Set/Get Interface for Properties”
Class Attributes

Introduced in R2014b

matlab.mixin.SetGetExactNames class

Package: matlab.mixin
Superclasses: matlab.mixin.SetGet

Require exact name match for set and get methods

Description

`classdef MySubClass < matlab.mixin.SetGetExactNames` subclasses the `matlab.mixin.SetGetExactNames` class.

The `matlab.mixin.SetGetExactNames` class is an abstract class that provides a property set and get interface.

Use the `matlab.mixin.SetGetExactNames` class to derive classes that inherit property `set` and `get` methods. For information on how to use the `set` and `get` methods, see the MATLAB `set` and `get` functions.

Classes derived from `matlab.mixin.SetGetExactNames` require case-sensitive, exact property name matches. To support inexact name matches, derive from the matlab.mixin.SetGet class.

Methods

Inherited Methods

Methods inherited from `matlab.mixin.SetGet`.

Method	Purpose
set	Assigns values to the specified properties or returns a cell array of possible values for writable properties.
get	Returns value of specified property or a `struct` with all property values.
setdisp	Implicitly called when `set` is called with no output arguments and a handle array, but no property name. Override this method to change what set displays.

Method	Purpose
getdisp	Implicitly called when `get` is called with no output arguments and handle array, but no property name. Override this method to change what get displays.

Attributes

`Abstract`	`true`
`ConstructOnLoad`	`true`
`HandleCompatible`	`true`

To learn about attributes of classes, see Class Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.SetGet

Topics

"Implement Set/Get Interface for Properties"
Class Attributes
Property Attributes

Introduced in R2016b

set

Class: matlab.mixin.SetGet
Package: matlab.mixin

Assign specified property name/property value pairs

Syntax

```
set(H,'Name',Value,...)
set(H,pn,pv)
set(H,S)
S = set(h)
```

Description

`set(H,'Name',Value,...)` sets the named property to the specified value for the objects in the handle array `H`. `set` matches partial and case-insensitive names that are not ambiguous. Inexact name matching applies only to class properties. Dynamic properties require exact name matches.

`set(H,pn,pv)` sets the named properties specified in the cell array of strings `pn` to the corresponding values in the cell array `pv` for all objects specified in `H`. The cell array `pn` must be `1`-by-`n` (where `n` is the number of property names), but the cell array `pv` can be `m`-by-`n` where `m` is equal to `length(H)`. `set` updates each object with the associated set of values for the list of property names contained in.

`set(H,S)` sets the properties identified by each field name of `struct` `S` with the values contained in `S`. `S` is a `struct` whose field names are object property names.

`S = set(h)` returns the user-settable properties of scalar `h`. `S` is a `struct` whose field names are the object's property names and values that are either empty cell arrays or cell arrays of possible values for properties that have a finite set of predefined possible values.

Input Arguments

`H` — Input handle array
handle array

Input handle array, specified as a single handle or an array of handles

`'Name'` — Property name
`char` vector

Property name, specified as a combination of partial and case-insensitive names. The inexact name must not be ambiguous. Dynamic properties must use exact names.

Data Types: `char`

`Value` — Property value to assign to the named property
property value

Property value to assign to the named property, specified as appropriate for that property.

`pn` — Property names
cell array of strings

Property names, specified as a cell array of `char` vectors. The cell array `pn` must be `1`-by-`n` (where `n` is the number of property names).

Data Types: `cell`

`pv` — Property values
cell array

Property values, specified as a cell array. The cell array `pv` can be `m`-by-`n` where `m` is equal to `length(H)` and `n` is the number of property names in `pn`.

Data Types: `cell`

`S` — Property name and value structure
`struct`

Property name and value structure. The fields of `S` correspond to property names and the values of the fields are the property values to set.

Data Types: `struct`

h — Scalar object handle

handle

Scalar object handle. To obtain user-settable properties, input argument must be a scalar object handle.

Output Arguments

S — Settable properties

`struct`

Settable properties, returned as a structure with fields corresponding to property names and values that are either empty cell arrays or cell arrays of possible values for properties that have a finite set of predefined possible values.

Attributes

`Access`	`public`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Tips

- Override the `matlab.mixin.SetGet` class setdisp method to change how MATLAB displays information returned by `set`.

See Also

See Also

matlab.mixin.SetGet.setdisp | matlab.mixin.SetGet | matlab.mixin.SetGet.get | `set`

Topics

"Implement Set/Get Interface for Properties"

setdisp

Class: matlab.mixin.SetGet
Package: matlab.mixin

Customize set method display

Syntax

```
setdisp(h)
```

Description

`setdisp(h)` called by `set` when `set` is called with no output arguments and a single input argument that is a scalar handle. Override this `matlab.mixin.SetGet` class method in a subclass to change how property information is displayed in the command window.

Input Arguments

h — Object handle
handle

Object handle whose settable properties and their possible values are to be displayed.

Attributes

Access	public

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.SetGet.set | matlab.mixin.SetGet | matlab.mixin.SetGet.getdisp | `set`

Topics

"Implement Set/Get Interface for Properties"

get

Class: matlab.mixin.SetGet
Package: matlab.mixin

Query specified property values

Syntax

```
CV = get(H,'Name')
SV = get(h)
get(H)
```

Description

`CV = get(H,'Name')` returns the value of the named property from the objects in the handle array `H`. If `H` is scalar, `get` returns a single value; if `H` is an array, `get` returns a cell array of property values. `get` matches partial and case-insensitive names that are not ambiguous. Inexact name matching applies only to class properties. Dynamic properties require exact name matches.

If you specify a cell array of property names as the second argument, then `get` returns a cell array of values, where each row in the cell corresponds to an element in `H` and each column in the cell corresponds to an element in the property name cell array.

If `H` is nonscalar and `'Name'` is the name of a dynamic property, `get` returns a value only if the property exists in all objects referenced in `H`.

`SV = get(h)` returns a structure in which the field names are the object's property names and the values are the current values of the corresponding properties. If `h` is nonscalar, then `SV` is a `numel(h)`-by-`1` array of structures.

`get(H)` displays all property names and their current values for the MATLAB objects with handle `H`.

Your subclass can override the `matlab.mixin.SetGet` `getdisp` method to control how MATLAB displays this information.

Input Arguments

`H` — Input handle array
object array

Input handle array, specified as a single handle or an array of handles

`'Name'` — Property to query
`char` vector

Property to query, specified as a combination of partial and case-insensitive names. The inexact name must not be ambiguous. Dynamic properties must use exact names.

Data Types: `char`

Output Arguments

`CV` — Value of queried property
property value

Value of queried property, returned as a single value or a cell array of values.

`SV` — Structure of property names and values
`struct`

Structure of property names and values, in which the field names are the object's property names and the values are the current values of the corresponding properties.

Data Types: `struct`

Attributes

`Access`	`public`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Tips

- Override the `matlab.mixin.SetGet` class matlab.mixin.SetGet.getdisp method to change how MATLAB displays information returned by `get`.

See Also

See Also

matlab.mixin.SetGet.getdisp | matlab.mixin.SetGet | `get`

Topics

"Implement Set/Get Interface for Properties"

getdisp

Class: matlab.mixin.SetGet
Package: matlab.mixin

Customize get method display

Syntax

```
getdisp(h)
```

Description

`getdisp(h)` called by `get` when `get` is called with no output arguments and a single input argument that is a scalar handle. Override this `matlab.mixin.SetGet` class method in a subclass to change how property information is displayed in the command window.

Input Arguments

h — Object handle

object

Object handle whose gettable properties and their current values are to be displayed.

Attributes

Access	public

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

See Also

See Also

matlab.mixin.SetGet.getdisp | matlab.mixin.SetGet.getdisp | `get`

Topics

"Implement Set/Get Interface for Properties"

set (RandStream)

Set random number stream property

Class

`RandStream`

Syntax

```
set(stream,'PropertyName',Value)
set(stream,'Property1',Value1,'Property2',Value2,...)
set(stream,A)
A = set(stream,'Property')
set(stream,'Property')
A = set(stream)
set(stream)
```

Description

`set(stream,'PropertyName',Value)` sets the property `'PropertyName'` of the random stream `stream` to the value `Value`.

`set(stream,'Property1',Value1,'Property2',Value2,...)` sets multiple random stream property values with a single statement.

`set(stream,A)` where `A` is a structure whose field names are property names of the random stream `stream` sets the properties of `stream` named by each field with the values contained in those fields.

`A = set(stream,'Property')` or `set(stream,'Property')` displays possible values for the specified property of `stream`.

`A = set(stream)` or `set(stream)` displays or returns all writable properties of `stream` and their possible values.

See Also

`RandStream` | `get (RandStream)` | `rand` | `randn` | `randi`

set (serial)

Configure or display serial port object properties

Syntax

```
set(obj)
props = set(obj)
set(obj,'PropertyName')
props = set(obj,'PropertyName')
set(obj,'PropertyName',PropertyValue,...)
set(obj,PN,PV)
set(obj,S)
```

Description

`set(obj)` displays all configurable properties values for the serial port object, `obj`. If a property has a finite list of possible string values, then these values are also displayed.

`props = set(obj)` returns all configurable properties and their possible values for `obj` to `props`. `props` is a structure whose field names are the property names of `obj`, and whose values are cell arrays of possible property values. If the property does not have a finite set of possible values, then the cell array is empty.

`set(obj,'PropertyName')` displays the valid values for *`PropertyName`* if it possesses a finite list of string values.

`props = set(obj,'PropertyName')` returns the valid values for *`PropertyName`* to `props`. If *`PropertyName`* does not have a finite list of possible values, `props` is a cell array of possible string values or an empty cell array.

`set(obj,'PropertyName',PropertyValue,...)` configures multiple property values with a single command.

`set(obj,PN,PV)` configures the properties specified in the cell array of strings `PN` to the corresponding values in the cell array `PV`. `PN` must be a vector. `PV` can be m-by-n where m is equal to the number of serial port objects in `obj` and n is equal to the length of `PN`.

`set(obj,S)` configures the named properties to the specified values for `obj`. `S` is a structure whose field names are serial port object properties, and whose field values are the values of the corresponding properties.

Examples

This example illustrates shows how to use the `set` function to configure or return property values, on a Windows platform.

```
s = serial('COM1');
set(s,'BaudRate',9600,'Parity','even')
set(s,{'StopBits','RecordName'},{2,'sydney.txt'})
set(s,'Parity')
[ {none} | odd | even | mark | space ]
```

Tips

Refer to Configuring Property Values for a list of serial port object properties that you can configure with `set`.

You can use any combination of property name/property value pairs, structures, and cell arrays in one call to the `set` function. Additionally, you can specify a property name without regard to case, and you can use property name completion. For example, if `s` is a serial port object, then the following commands are all valid.

```
set(s,'BaudRate')
set(s,'baudrate')
set(s,'BAUD')
```

See Also

`get`

Introduced before R2006a

set (tscollection)

Set properties of `tscollection` object

Syntax

```
set(tsc,'Property',Value)
set(tsc,'Property1',Value1,'Property2',Value2,...)
set(tsc,'Property')
```

Description

`set(tsc,'Property',Value)` sets the property `'Property'` of the `tscollection` `tsc` to the value `Value`. The following syntax is equivalent:

```
tsc.Property = Value
```

`set(tsc,'Property1',Value1,'Property2',Value2,...)` sets multiple property values for `tsc` with a single statement.

`set(tsc,'Property')` displays values for the specified property in the time-series collection `tsc`.

`set(tsc)` displays all properties and values of the `tscollection` object `tsc`.

See Also

`get (tscollection)`

Introduced before R2006a

setabstime (tscollection)

Set times of `tscollection` object as date strings

Syntax

```
tsc = setabstime(tsc,Times)
tsc = setabstime(tsc,Times,format)
```

Description

`tsc = setabstime(tsc,Times)` sets the times in tsc using the date strings Times. Times must be either a cell array of strings, or a `char` array containing valid date or time values in the same date format.

`tsc = setabstime(tsc,Times,format)` specifies the date-string format used in Times explicitly.

Examples

1. Create a `tscollection` object.

   ```
   tsc = tscollection(timeseries(rand(3,1)))
   ```

2. Set the absolute time vector.

   ```
   tsc = setabstime(tsc,{'12-DEC-2005 12:34:56',...
         '12-DEC-2005 13:34:56','12-DEC-2005 14:34:56'})
   ```

See Also

`datestr` | `getabstime (tscollection)` | `tscollection`

Introduced before R2006a

setappdata

Store application-defined data

Use this function to store data in a UI. You can retrieve the data elsewhere in your code using the `getappdata` function. Both of these functions provide a convenient way to share data between callbacks or between separate UIs.

Syntax

```
setappdata(obj,name,val)
```

Description

`setappdata(obj,name,val)` stores the contents of `val`. The graphics object, `obj`, and the name identifier, `name`, uniquely identify the data for later retrieval.

Examples

Store and Retrieve Date Information

Create a figure window. Then, get the current time using the `date` function.

```
f = figure;
val = date
```

```
val =

23-Dec-2014
```

Store the contents of `val` using the `setappdata` function. In this case, `val` is stored in the figure object using the name identifier, `'todaysdate'`.

```
setappdata(f,'todaysdate',val);
```

Retrieve the data and display it.

```
getappdata(f,'todaysdate')
```

```
ans =

23-Dec-2014
```

Input Arguments

`obj` — Graphics object in which to store the value

figure | uipanel | uibuttongroup | uicontrol | ...

Graphics object in which to store the value, specified as any graphics object (except an ActiveX component). The graphics object must be accessible from within the functions you plan to store and retrieve the data.

`name` — Name identifier

character vector

Name identifier, specified as a character vector. Select a unique name identifier that is easy to remember so that you can easily recall it when you want to retrieve the data.

Example: `setappdata(h,'mydata',5)` stores the value `5` using the name `'mydata'`.

Data Types: `char`

`val` — Value to store

any MATLAB data type

Value to store, specified as any MATLAB data type.

See Also

See Also

`getappdata` | `guidata` | `isappdata` | `rmappdata`

Topics

"Share Data Among Callbacks"

Introduced before R2006a

setcats

Set categories in categorical array

Syntax

```
B = setcats(A,newcats)
```

Description

`B = setcats(A,newcats)` sets categories in output categorical array `B` using categories defined by `newcats` and elements defined by `A`.

- If an element of `A` is in a category listed in `newcats`, then the corresponding element of `B` has the same value as in `A`.
- If `A` has a category not listed in `newcats`, then `B` does not have that category. The corresponding elements in `B` are undefined.
- If `newcats` lists a category that is not a category of `A`, then `B` has no elements equal to that category.

Examples

Set New Categories

Create a categorical array containing various colors.

```
A = categorical({'blue','black','red';'red','blue','black';'black','red','blue'})
```

```
A = 3×3 categorical array
     blue       black      red
     red        blue       black
     black      red        blue
```

Set new categories.

```
B = setcats(A,{'red','black'})
```

```
B = 3×3 categorical array
     <undefined>      black            red
     red              <undefined>      black
     black            red              <undefined>
```

Elements that were `blue` in `A` are undefined in `B`.

Set New Categories and Assign Elements

Create a categorical array containing various colors.

```
A = categorical({'blue','black','red';'red','blue','black';'black','red','blue'})
```

```
A = 3×3 categorical array
     blue       black      red
     red        blue       black
     black      red        blue
```

Set new categories. Include a category that is not a category of `A`.

```
B = setcats(A,{'red','pink','blue'})
```

```
B = 3×3 categorical array
     blue             <undefined>      red
     red              blue             <undefined>
     <undefined>      red              blue
```

No element of `B` is `pink`, because `pink` is not a category of `A`. Assign an element of `B` to be `pink`.

```
B(1,2) = 'pink';
B
```

```
B = 3×3 categorical array
     blue             pink      red
     red              blue      <undefined>
     <undefined>      red       blue
```

Input Arguments

A — Categorical array

vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

newcats — New categories

character vector | cell array of character vectors

New categories, specified as a character vector or a cell array of character vectors.

Tips

- To change category names in a categorical array, use `renamecats`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`addcats` | `categories` | `iscategory` | `mergecats` | `removecats` | `renamecats` | `reordercats`

Introduced in R2014b

setdiff

Set difference of two arrays

Syntax

```
C = setdiff(A,B)
C = setdiff(A,B,'rows')
[C,ia] = setdiff(A,B)
[C,ia] = setdiff(A,B,'rows')

[C,ia] = setdiff( ___ ,setOrder)

[C,ia] = setdiff(A,B,'legacy')
[C,ia] = setdiff(A,B,'rows','legacy')
```

Description

`C = setdiff(A,B)` returns the data in `A` that is not in `B`, with no repetitions. `C` is in sorted order.

- If `A` and `B` are tables or timetables, then `setdiff` returns the rows from `A` that are not in `B`. For timetables, `setdiff` takes row times into account to determine equality, and sorts the output timetable `C` by row times.

`C = setdiff(A,B,'rows')` treats each row of `A` and each row of `B` as single entities and returns the rows from `A` that are not in `B`, with no repetitions. `C` is in sorted order.

The `'rows'` option does not support cell arrays, unless one of the inputs is either a categorical array or a datetime array.

`[C,ia] = setdiff(A,B)` also returns the index vector `ia`.

- Generally, `C = A(ia)`.
- If `A` and `B` are tables or timetables, then `C = A(ia,:)`.

`[C,ia] = setdiff(A,B,'rows')` also returns the index vector `ia`, such that `C = A(ia,:)`.

`[C,ia] = setdiff( ___ ,setOrder)` returns `C` in a specific order using any of the input arguments in the previous syntaxes. `setOrder` can be `'sorted'` or `'stable'`:

- `'sorted'` — `C` is in sorted order. This is the default.
- `'stable'` — `C` is in the same order as `A`.

`[C,ia] = setdiff(A,B,'legacy')` and `[C,ia] = setdiff( A,B,'rows','legacy')` preserve the behavior of the `setdiff` function from R2012b and prior releases.

The `'legacy'` option does not support categorical arrays, datetime arrays, duration arrays, tables, or timetables.

Examples

Difference of Two Vectors

Define two vectors with values in common.

```
A = [3 6 2 1 5 1 1];
B = [2 4 6];
```

Find the values in `A` that are not in `B`.

```
C = setdiff(A,B)
```

```
C =

     1     3     5
```

Difference of Two Tables

Define two tables with rows in common.

```
A = table([1:5]',['A';'B';'C';'D';'E'],logical([0;1;0;1;0]))
```

```
A = 5×3 table
    Var1    Var2    Var3
    ____    ____    _____
```

```
    1       A       false
    2       B       true
    3       C       false
    4       D       true
    5       E       false
```

```
B = table([1:2:10]',['A';'C';'E';'G';'I'],logical(zeros(5,1)))
```

```
B = 5×3 table
    Var1    Var2    Var3
    ____    ____    _____

    1       A       false
    3       C       false
    5       E       false
    7       G       false
    9       I       false
```

Find the rows in A that are not in B.

```
C = setdiff(A,B)
```

```
C = 2×3 table
    Var1    Var2    Var3
    ____    ____    _____

    2       B       true
    4       D       true
```

Difference of Two Vectors and Indices to Different Values

Define two vectors with values in common.

```
A = [3 6 2 1 5 1 1];
B = [2 4 6];
```

Find the values in A that are not in B as well as the index vector ia, such that C = A(ia).

```
[C,ia] = setdiff(A,B)
```

```
C =
```

```
     1     3     5


ia =

     4
     1
     5
```

Difference of Two Tables and Indices to Different Rows

Define a table, A, of gender, age, and height for five people.

```
A = table(['M';'M';'F';'M';'F'],[27;52;31;46;35],[74;68;64;61;64],...
'VariableNames',{'Gender' 'Age' 'Height'},...
'RowNames',{'Ted' 'Fred' 'Betty' 'Bob' 'Judy'})
```

```
A = 5×3 table
             Gender    Age    Height
             ______    ___    ______

    Ted      M         27     74
    Fred     M         52     68
    Betty    F         31     64
    Bob      M         46     61
    Judy     F         35     64
```

Define a table, B, with the same variables as A.

```
B = table(['F';'M';'F';'F'],[64;68;62;58],[31;47;35;23],...
'VariableNames',{'Gender' 'Height' 'Age'},...
'RowNames',{'Meg' 'Joe' 'Beth' 'Amy'})
```

```
B = 4×3 table
            Gender    Height    Age
            ______    ______    ___

    Meg     F         64        31
    Joe     M         68        47
    Beth    F         62        35
    Amy     F         58        23
```

Find the rows in A that are not in B, as well as the index vector ia, such that C = A(ia,:).

```
[C,ia] = setdiff(A,B)
```

```
C = 4×3 table
            Gender    Age    Height
            ______    ___    ______

    Judy    F         35     64
    Ted     M         27     74
    Bob     M         46     61
    Fred    M         52     68


ia =

     5
     1
     4
     2
```

The rows of C are in sorted order first by Gender and next by Age.

Difference of Rows in Two Matrices

Define two matrices with rows in common.

```
A = [7 9 7; 0 0 0; 7 9 7; 5 5 5; 1 4 5];
B = [0 0 0; 5 5 5];
```

Find the rows from A that are not in B as well as the index vector ia, such that C = A(ia,:).

```
[C,ia] = setdiff(A,B,'rows')
```

```
C =

     1     4     5
     7     9     7
```

```
ia =

     5
     1
```

Difference of Two Vectors with Specified Output Order

Use the `setOrder` argument to specify the ordering of the values in `C`.

Specify `'stable'` or `'sorted'` when the order of the values in `C` are important.

```
A = [3 6 2 1 5 1 1];
B = [2 4 6];
[C,ia] = setdiff(A,B,'stable')
```

```
C =

     3     1     5


ia =

     1
     4
     5
```

Alternatively, you can specify `'sorted'` order.

```
 [C,ia] = setdiff(A,B,'sorted')
```

```
C =

     1     3     5


ia =

     4
     1
     5
```

Difference of Vectors Containing NaNs

Define two vectors containing NaN.

```
A = [5 NaN NaN];
B = [5 NaN];
```

Find the set difference of A and B.

```
C = setdiff(A,B)
```

```
C =

   NaN   NaN
```

setdiff treats NaN values as distinct.

Cell Array of Character Vectors with Trailing White Space

Create a cell array of character vectors, A.

```
A = {'dog','cat','fish','horse'};
```

Create a cell array of character vectors, B, where some of the vectors have trailing white space.

```
B = {'dog ','cat','fish ','horse'};
```

Find the character vectors in A that are not in B.

```
[C,ia] = setdiff(A,B)
```

```
C = 1×2 cell array
    'dog'    'fish'


ia =

     1
     3
```

setdiff treats trailing white space in cell arrays of character vectors as distinct characters.

Difference of Char and Cell Array of Character Vectors

Create a character vector, A.

```
A = ['cat';'dog';'fox';'pig'];
class(A)
```

```
ans =
'char'
```

Create a cell array of character vectors, B.

```
B={'dog','cat','fish','horse'};
class(B)
```

```
ans =
'cell'
```

Find the character vectors in A that are not in B.

```
C = setdiff(A,B)
```

```
C = 2×1 cell array
    'fox'
    'pig'
```

The result, C, is a cell array of character vectors.

```
class(C)
```

```
ans =
'cell'
```

Preserve Legacy Behavior of setdiff

Use the `'legacy'` flag to preserve the behavior of `setdiff` from R2012b and prior releases in your code.

Find the difference of A and B with the current behavior.

```
A = [3 6 2 1 5 1 1];
B = [2 4 6];
[C1,ia1] = setdiff(A,B)
```

```
C1 =

     1     3     5


ia1 =

     4
     1
     5
```

Find the difference of A and B, and preserve the legacy behavior.

```
[C2,ia2] = setdiff(A,B,'legacy')
```

```
C2 =

     1     3     5


ia2 =

     7     1     5
```

Input Arguments

A,B — Input arrays

numeric arrays | logical arrays | character arrays | string arrays | categorical arrays | datetime arrays | duration arrays | cell arrays of character vectors | tables | timetables

Input arrays, specified as numeric arrays, logical arrays, character arrays, string arrays, categorical arrays, datetime arrays, duration arrays, cell arrays of character vectors, tables, or timetables. If you specify the `'rows'` option, A and B must have the same number of columns.

A and B must belong to the same class with the following exceptions:

- `logical`, `char`, and all numeric classes can combine with `double` arrays.
- Cell arrays of character vectors can combine with character arrays or string arrays.

- Categorical arrays can combine with character arrays, cell arrays of character vectors, or string arrays.
- Datetime arrays can combine with cell arrays of date character vectors or single date character vectors.

There are additional requirements for A and B based on data type:

- If A and B are both ordinal categorical arrays, they must have the same sets of categories, including their order. If neither A nor B are ordinal, they need not have the same sets of categories, and the comparison is performed using the category names. In this case, the categories of C are the sorted union of the categories from A and B.
- If A and B are tables or timetables, they must have the same variable names (except for order). For tables, row names are ignored, so that two rows that have the same values, but different names, are considered equal. For timetables, row times are taken into account, so that two rows that have the same values, but different times, are not considered equal.
- If A and B are datetime arrays, they must be consistent with each other in whether they specify a time zone.

A and B also can be objects with the following class methods:

- `sort` (or `sortrows` for the `'rows'` option)
- `eq`
- `ne`

The object class methods must be consistent with each other. These objects include heterogeneous arrays derived from the same root class. For example, A and B can be arrays of handles to graphics objects.

`setOrder` — Order flag

`'sorted'` (default) | `'stable'`

Order flag, specified as `'sorted'` or `'stable'`, indicates the order of the values (or rows) in C.

Order Flag	Meaning
`'sorted'`	The values (or rows) in C return in sorted order. For example: `C = setdiff([4 1 3 2],[2 1],'sorted')` returns `C = [3 4]`.

Order Flag	Meaning
`'stable'`	The values (or rows) in `C` return in the same order as in `A`. For example: `C = setdiff([4 1 3 2],[2 1],'stable')` returns `C = [4 3]`.

Output Arguments

`C` — Difference of `A` and `B`

vector | matrix | table | timetable

Difference of `A` and `B`, returned as a vector, matrix, table, or timetable. If the inputs `A` and `B` are tables or timetables, then the order of the variables in `C` is the same as the order of the variables in `A`.

The following describes the shape of `C` when the inputs are vectors or matrices and when the `'legacy'` flag is not specified:

- If the `'rows'` flag is not specified and `A` is a row vector, then `C` is a row vector.
- If the `'rows'` flag is not specified and `A` is not a row vector, then `C` is a column vector.
- If the `'rows'` flag is specified, then `C` is a matrix containing the rows of `A` that are not in `B`.
- If all the values (or rows) of `A` are also in `B`, then `C` is an empty matrix.

The class of `C` is the same as the class of `A`, unless:

- `A` is a character array and `B` is a cell array of character vectors, in which case `C` is a cell array of character vectors.
- `A` is a character vector, cell array of character vectors, or string, and `B` is a categorical array, in which case `C` is a categorical array.
- `A` is a cell array of character vectors or single character vector and `B` is a datetime array, in which case `C` is a datetime array.
- `A` is a character vector or cell array of character vectors and `B` is a string array, in which case `C` is a string array.

`ia` — Index to `A`

column vector

Index to A, returned as a column vector when the `'legacy'` flag is not specified. `ia` identifies the values (or rows) in A that are not in B. If there is a repeated value (or row) appearing exclusively in A, then `ia` contains the index to the first occurrence of the value (or row).

Tips

- To find the set difference with respect to a subset of variables from a table or timetable, you can use column subscripting. For example, you can use `setdiff(A(:,vars),B(:,vars))`, where *`vars`* is a positive integer, a vector of positive integers, a variable name, a cell array of variable names, or a logical vector. Alternatively, you can use `vartype` to create a subscript that selects variables of a specified type.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not support cell arrays for the first or second arguments.
- When you do not specify the `'rows'` option:
  - Inputs A and B must be vectors. If you specify the `'legacy'` option, then inputs A and B must be row vectors.
  - The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1.
  - Do not use `[]` to represent the empty set. Use a 1-by-0 or 0-by-1 input, for example, `zeros(1,0)`, to represent the empty set.
  - If you specify the `'legacy'` option, then empty outputs are row vectors, 1-by-0. They are never 0-by-0.
- When you specify both the `'legacy'` and `'rows'` options, the output `ia` is a column vector. If `ia` is empty, then it is 0-by-1. It is never 0-by-0, even if the output C is 0-by-0.

- When the `setOrder` is not `'stable'` or when you specify the `'legacy'` option, the inputs must already be sorted in ascending order. The first output, `C`, is sorted in ascending order.
- Complex inputs must be `single` or `double`.
- When one input is complex and the other input is real, do one of the following:
  - Set `setOrder` to `'stable'`.
  - Sort the real input in complex ascending order (by absolute value). Suppose the real input is `x`. Use `sort(complex(x))` or `sortrows(complex(x))`.
- See "Code Generation for Complex Data with Zero-Valued Imaginary Parts" (MATLAB Coder).

See Also

See Also

`intersect` | `ismember` | `issorted` | `setxor` | `sort` | `union` | `unique`

Topics

"Combine Categorical Arrays"

Introduced before R2006a

setDirectory

Class: Tiff

Make specified IFD current IFD

Syntax

```
setDirectory(tiffobj,dirNum)
```

Description

`setDirectory(tiffobj,dirNum)` sets the image file directory (IFD) specified by `dirNum` as the current IFD. `Tiff` object methods operate on the current IFD. The directory index number is one-based.

Examples

Open a TIFF file and move to an IFD in the file by specifying its index number. The TIFF file should contain multiple images.

```
t = Tiff('example.tif','r');
setDirectory(t,2)
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFSetDirectory` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.currentDirectory | Tiff.nextDirectory

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

setenv

Set environment variable

Syntax

```
setenv(name,value)
setenv(name)
```

Description

`setenv(name,value)` sets the value of an environment variable belonging to the underlying operating system. Inputs `name` and `value` are both character vectors. If `name` exists as an environment variable, then `setenv` replaces its current value with `value`. If `name` does not exist, `setenv` creates an environment variable called `name` and assigns `value` to it.

`setenv(name)` is equivalent to `setenv(name, '')` and assigns a null value to the variable `name`. On the Microsoft Windows platform, this syntax is equivalent to undefining the variable. On most UNIX platforms, it is possible to have an environment variable defined as empty.

The maximum number of characters in `name` is 2^{15} - 2 (or 32766). If `name` contains the character `=`, `setenv` throws an error. The behavior of environment variables with `=` in the name is not well-defined.

On all platforms, `setenv` passes the `name` and `value` to the operating system unchanged. Special characters such as `;`, `/`, `:`, `$`, `%`, etc. are left unexpanded and intact in the variable value.

A process that is spawned using the MATLAB `system`, `unix`, `dos`, or `!` functions reads the values assigned to variables using the `setenv` function. You can retrieve any value set with `setenv` by using `getenv(name)`.

Examples

Set and retrieve a new value for the environment variable `TEMP`:

```
setenv('TEMP', 'C:\TEMP');
getenv('TEMP')
```

Append the `Perl\bin` folder to your system `PATH` variable:

```
setenv('PATH', [getenv('PATH') ';D:\Perl\bin']);
```

See Also

See Also

`dos` | `getenv` | `system` | `unix`

Topics

"MATLAB Operators and Special Characters"

setfield

Assign values to structure array field

Syntax

```
s = setfield(s,'field',value)
s = setfield(s,{sIndx1,...,sIndxM},'field',
{fIndx1,...,fIndxN},value)
```

Description

`s = setfield(s,'field',value)`, where `s` is a 1-by-1 structure, sets the contents of the specified field, equivalent to `s.field = value`. If `s` does not contain the specified *`field`*, the `setfield` function creates the field and assigns the specified value. Pass field references as character vectors.

`s = setfield(s,{sIndx1,...,sIndxM},'field',
{fIndx1,...,fIndxN},value)` sets the contents of the specified field, equivalent to `s(sIndx1,...,sIndxM).field(fIndx1,...,fIndxN) = value`. The `setfield` function supports multiple sets of *`field`* and *`fIndx`* inputs. If structure `s` or any of the fields is a nonscalar structure, the *`Indx`* inputs associated with that input are required. Otherwise, the *`Indx`* inputs are optional. If you specify a single colon operator for an index input, enclose it in single quotation marks: `':'`.

Examples

Add values to a structure that contains nested fields:

```
grades = [];
level = 5;
semester = 'Fall';
subject = 'Math';
student = 'John_Doe';
fieldnames = {semester subject student}
newGrades_Doe = [85, 89, 76, 93, 85, 91, 68, 84, 95, 73];
```

```
grades = setfield(grades, {level}, ...
                  fieldnames{:}, {10, 21:30}, ...
                  newGrades_Doe);

% View the new contents.
grades(level).(semester).(subject).(student)(10, 21:30)
```

Using the structure defined in the previous example, remove the tenth row of the specified field:

```
grades = setfield(grades, {level}, fieldnames{:}, {10,':'}, []);
```

Tips

- For most cases, add data to a structure array by indexing rather than using the `setfield` function. For more information, see "Access Data in a Structure Array" and "Generate Field Names from Variables".
- Call `setfield` to simplify references to structure arrays with nested fields, as shown in the Examples section.

See Also

`getfield` | `fieldnames` | `isfield` | `orderfields` | `rmfield`

Topics

"Generate Field Names from Variables"
"Access Data in a Structure Array"

Introduced before R2006a

setpixelposition

Set component position in pixels

Syntax

```
setpixelposition(handle,position)
setpixelposition(handle,position,recursive)
```

Description

`setpixelposition(handle,position)` sets the position, in pixels, of the component specified by `handle`. The `position` argument is a four-element vector that specifies the location and size of the component: [pixels from left, pixels from bottom, pixels across, pixels high]. The first two values in this vector are the number of pixels from the left and bottom edge of the parent container. The last two values specify the width and height of the component.

`setpixelposition(handle,position,recursive)` sets the position as above. If Boolean `recursive` is true, the position is set relative to the parent figure of `handle`.

Examples

This example first creates a push button within a panel.

```
f = figure('Position',[300 300 300 200]);
p = uipanel('Position',[.2 .2 .6 .6]);
h1 = uicontrol(p,'Style','PushButton',...
               'Units','normalized',...
               'String','Push Button',...
               'Position',[.1 .1 .5 .2]);
```

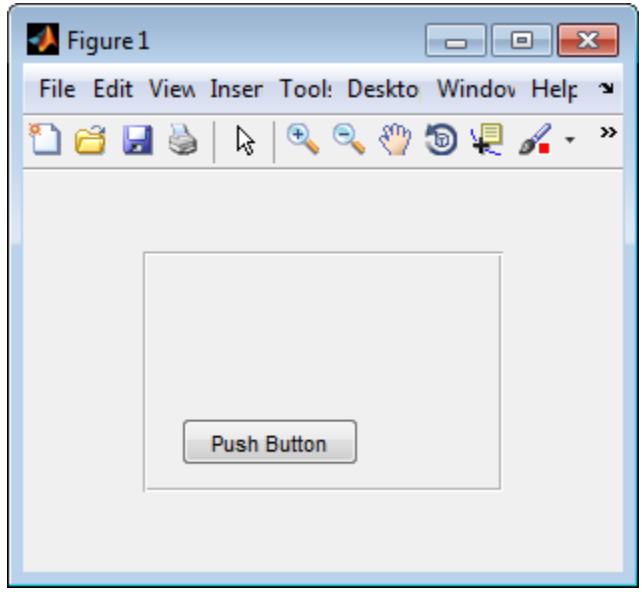

The example then retrieves the position of the push button and changes its position with respect to the panel.

```
pos1 = getpixelposition(h1);
setpixelposition(h1,pos1 + [10 10 25 25]);
```

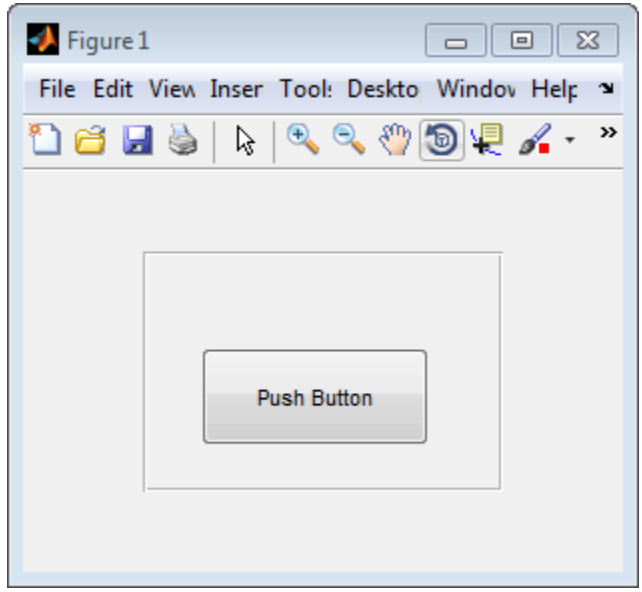

Definitions

Pixels

Distances in pixels are independent of your system resolution on Windows and Macintosh systems:

- On Windows systems, a pixel is 1/96th of an inch.
- On Macintosh systems, a pixel is 1/72nd of an inch.

On Linux systems, the size of a pixel is determined by your system resolution.

See Also

`getpixelposition` | `uicontrol` | `uipanel`

setpref

Set preference

Syntax

```
setpref('group','pref',val)
setpref('group',{'pref1','pref2',...,'prefn'},{val1,val2,...,valn})
```

Description

`setpref('group','pref',val)` sets the preference specified by `group` and `pref` to the value `val`. Individual preference values can be any MATLAB data type, including numeric types, character vectors, cell arrays, structures, and objects. Setting a preference that does not yet exist causes it to be created.

`group` labels a related collection of preferences. You can choose any name that is a legal variable name, and is descriptive enough to be unique, e.g., `'MathWorks_GUIDE_ApplicationPrefs'`. The input argument `pref` identifies an individual preference in that group, and must be a legal variable name.

`setpref('group',{'pref1','pref2',...,'prefn'},{val1,val2,...,valn})` sets each preference specified in the cell array of names to the corresponding value.

Note Preference values are persistent and maintain their values between MATLAB sessions. Where they are stored is system dependent.

Examples

Use `addpref` to create a preference group called `mytoolbox` and a preference within it called `version`, and then modify the contents of `version` using `setpref`:

```
addpref('mytoolbox','version','1.0')
getpref('mytoolbox','version')

ans =
```

```
1.0

setpref('mytoolbox','version',{'1.0','beta'})
getpref('mytoolbox','version')

ans =
    '1.0'    'beta'
```

See Also

addpref | ispref | rmpref | getpref | uigetpref | uisetpref

Introduced before R2006a

setstr

Set string flag

Note: `setstr` is not recommended. Use `char` instead.

Description

This MATLAB 4 function has been renamed `char` in MATLAB 5.

Introduced before R2006a

setSubDirectory

Class: Tiff

Make subIFD specified by byte offset current IFD

Syntax

```
setSubDirectory(tiffobj,offset)
```

Description

`setSubDirectory(tiffobj,offset)` sets the subimage file directory (subIFD) specified by `offset` the current IFD. The offset value is given in bytes. Use this method when you want to access subIFDs linked through the `SubIFD` tag.

Examples

Set Subimage File Directory

Open a TIFF file and read the value of the `SubIFD` tag in the current IFD. The `SubIFD` tag contains byte offsets that specify the location of subIFDs in the IFD. The TIFF file should contain subIFDs.

```
t = Tiff('example.tif','r');
```

Read the value of the SubIFD tag to get subdirectory offsets.

```
offsets = getTag(t,'SubIFD');
```

Set one of the subdirectories (if more than one) as the current directory.

```
setSubDirectory(t,offsets(1))
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"

- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFSetSubDirectory` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.setDirectory

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

setTag

Class: Tiff

Set value of tag

Syntax

```
setTag(tiffobj,tagId,tagValue)
setTag(tiffobj,tagStruct)
```

Description

`setTag(tiffobj,tagId,tagValue)` sets the value of the TIFF tag specified by `tagId` to the value specified by `tagValue`. You can specify `tagId` as a character string (`'ImageWidth'`) or using the numeric tag identifier defined by the TIFF specification (256). To see a list of all the tags with their numeric identifiers, view the value of the Tiff object `TagID` property. Use the `TagID` property to specify the value of a tag. For example, `Tiff.TagID.ImageWidth` is equivalent to the tag's numeric identifier.

`setTag(tiffobj,tagStruct)` sets the values of all of the tags with name/value fields in `tagStruct`. The names of fields in `tagstruct` must be the name of TIFF tags.

Note: If you are modifying a tag rather than creating it, you must use the Tiff.rewriteDirectory method after using the `Tiff.setTag` method.

Examples

Set Tag Values

Write TIFF tags and image data to a new TIFF file.

Read sample data into an array, `imdata`. Create a `Tiff` object associated with a new file, `myfile.tif`, and open the file for writing.

```
imdata = imread('example.tif');
t = Tiff('myfile.tif','w');
```

Set tag values by specifying the numeric tag identifier. Use the `TagID` property to obtain the tag identifier.

```
setTag(t,Tiff.TagID.ImageLength,size(imdata,1))
setTag(t,Tiff.TagID.ImageWidth,size(imdata,2))
```

Set tag values by specifying the tag name.

```
setTag(t,'Photometric', Tiff.Photometric.RGB)
setTag(t,'PlanarConfiguration', Tiff.PlanarConfiguration.Chunky)
```

Create a structure with fields named after TIFF tags and assign values to the fields. Pass this structure to the `setTag` method to set the values of these tags.

```
tagStruct.BitsPerSample = 8;
tagStruct.SamplesPerPixel = 3;
tagStruct.TileWidth = 128;
tagStruct.TileLength = 128;
tagStruct.Compression = Tiff.Compression.JPEG;
tagStruct.Software = 'MATLAB';
setTag(t,tagStruct)
```

Write the image data to the TIFF file.

```
write(t,imdata)
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFSetField` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.getTag

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

settimeseriesnames

Change name of `timeseries` object in `tscollection`

Syntax

```
tsc = settimeseriesnames(tsc,old,new)
```

Description

`tsc = settimeseriesnames(tsc,old,new)` replaces the `old` name of `timeseries` object with the new name in tsc.

See Also

`tscollection`

Introduced before R2006a

setxor

Set exclusive OR of two arrays

Syntax

```
C = setxor(A,B)
C = setxor(A,B,'rows')
[C,ia,ib] = setxor(A,B)
[C,ia,ib] = setxor(A,B,'rows')

[C,ia,ib] = setxor( ___ ,setOrder)

[C,ia,ib] = setxor(A,B,'legacy')
[C,ia,ib] = setxor(A,B,'rows','legacy')
```

Description

`C = setxor(A,B)` returns the data of `A` and `B` that are not in their intersection (the symmetric difference), with no repetitions. That is, `setxor` returns the data that occurs in `A` or `B`, but not both. `C` is in sorted order.

- If `A` and `B` are tables or timetables, then `setxor` returns the rows that occur in one or the other of the two tables, but not both. For timetables, `setxor` takes row times into account to determine equality, and sorts the output timetable `C` by row times.

`C = setxor(A,B,'rows')` treats each row of `A` and each row of `B` as single entities and returns the rows of `A` and `B` that are not in their intersection, with no repetitions. `C` is in sorted order.

The `'rows'` option does not support cell arrays, unless one of the inputs is either a categorical array or a datetime array.

`[C,ia,ib] = setxor(A,B)` also returns index vectors `ia` and `ib`.

- Generally, the values in `C` are a sorted combination of the elements of `A(ia)` and `B(ib)`.
- If `A` and `B` are tables or timetables, then `C` is a sorted combination of the rows of `A(ia,:)` and `B(ib,:)`.

`[C,ia,ib] = setxor(A,B,'rows')` also returns index vectors `ia` and `ib`, such that `C` is a sorted combination of the rows of `A(ia,:)` and `B(ib,:)`.

`[C,ia,ib] = setxor( ___ ,setOrder)` returns `C` in a specific order using any of the input arguments in the previous syntaxes. `setOrder` can be `'sorted'` or `'stable'`:

- `'sorted'` — `C` is in sorted order. This is the default.
- `'stable'` — `C` is in the same order as `A`.

`[C,ia,ib] = setxor(A,B,'legacy')` and `[C,ia,ib] = setxor( A,B,'rows','legacy')` preserve the behavior of the `setxor` function from R2012b and prior releases.

The `'legacy'` option does not support categorical arrays, datetime arrays, duration arrays, tables, or timetables.

Examples

Symmetric Difference of Two Vectors

Define two vectors with a value in common.

```
A = [5 1 3 3 3]; B = [4 1 2];
```

Find the values of `A` and `B` that are not in their intersection.

```
C = setxor(A,B)
```

```
C =

     2     3     4     5
```

Symmetric Difference of Two Tables

Define two tables with rows in common.

```
A = table([1:5]',['A';'B';'C';'D';'E'],logical([0;1;0;1;0]))
```

```
A = 5×3 table
    Var1    Var2    Var3
```

```
    ____    ____    _____

    1       A       false
    2       B       true
    3       C       false
    4       D       true
    5       E       false
```

```
B = table([1:2:10]',['A';'C';'E';'G';'I'],logical(zeros(5,1)))
```

```
B = 5×3 table
    Var1    Var2    Var3
    ____    ____    _____

    1       A       false
    3       C       false
    5       E       false
    7       G       false
    9       I       false
```

Find the rows of A and B that are not in their intersection.

```
C = setxor(A,B)
```

```
C = 4×3 table
    Var1    Var2    Var3
    ____    ____    _____

    2       B       true
    4       D       true
    7       G       false
    9       I       false
```

Symmetric Difference of Two Vectors and Indices to Different Values

Define two vectors with a value in common.

```
A = [5 1 3 3 3]; B = [4 1 2];
```

Find the values of A and B that are not in their intersection as well as the index vectors `ia` and `ib`.

```
[C,ia,ib] = setxor(A,B)
```

```
C =

     2     3     4     5


ia =

     3
     1


ib =

     3
     1
```

C is a sorted combination of the elements A(ia) and B(ib).

Symmetric Difference of Two Tables and Indices to Different Rows

Define a table, A, of gender, age, and height for five people.

```
A = table(['M';'M';'F'],[27;52;31],[74;68;64],...
'VariableNames',{'Gender' 'Age' 'Height'},...
'RowNames',{'Ted' 'Fred' 'Betty'})
```

```
A = 3×3 table
             Gender    Age    Height
             ______    ___    ______

    Ted      M         27     74
    Fred     M         52     68
    Betty    F         31     64
```

Define a table, B, with the same variables as A.

```
B = table(['F';'M'],[64;68],[31;47],...
'VariableNames',{'Gender' 'Height' 'Age'},...
'RowNames',{'Meg' 'Joe'})
```

```
B = 2×3 table
```

```
            Gender    Height    Age
            ______    ______    ___

    Meg     F         64        31
    Joe     M         68        47
```

Find the rows of A and B that are not in their intersection, as well as the index vectors ia and ib.

```
[C,ia,ib] = setxor(A,B)
```

```
C = 3×3 table
            Gender    Age    Height
            ______    ___    ______

    Ted     M         27     74
    Joe     M         47     68
    Fred    M         52     68


ia =

     1
     2


ib = 2
```

C is a sorted combination of the elements A(ia,:) and B(ib,:).

Symmetric Difference of Rows in Two Matrices

Define two matrices with rows in common.

```
A = [7 8 9; 7 7 1; 7 7 1; 1 2 3; 4 5 6];
B = [1 2 3; 4 5 6; 7 7 2];
```

Find the rows of A and B that are not in their intersection as well as the index vectors ia and ib.

```
[C,ia,ib] = setxor(A,B,'rows')
```

```
C =
```

```
     7     7     1
     7     7     2
     7     8     9


ia =

     2
     1


ib = 3
```

C is a sorted combination of the rows of A(ia,:) and B(ib,:).

Symmetric Difference of Two Vectors in Specified Order

Use the setOrder argument to specify the ordering of the values in C.

Specify 'stable' if you want the values in C to have the same order as A and B.

```
A = [5 1 3 3 3]; B = [4 1 2];
[C,ia,ib] = setxor(A,B,'stable')
```

```
C =

     5     3     4     2


ia =

     1
     3


ib =

     1
     3
```

Alternatively, you can specify 'sorted' order.

```
[C,ia,ib] = setxor(A,B,'sorted')
```

```
C =

     2     3     4     5


ia =

     3
     1


ib =

     3
     1
```

Symmetric Difference of Vectors Containing NaNs

Define two vectors containing NaN.

```
A = [5 NaN NaN]; B = [5 NaN NaN];
```

Find the symmetric difference of vectors A and B.

```
C = setxor(A,B)
```

```
C =

   NaN   NaN   NaN   NaN
```

The `setxor` function treats NaN values as distinct.

Cell Array of Character Vectors with Trailing White Space

Create a cell array of character vectors, A.

```
A = {'dog','cat','fish','horse'};
```

Create a cell array of character vectors, B, where some of the vectors have trailing white space.

```
B = {'dog ','cat','fish ','horse'};
```

Find the character vectors that are not in the intersection of A and B.

```
[C,ia,ib] = setxor(A,B)
```

```
C = 1×4 cell array
    'dog'    'dog '    'fish'    'fish '


ia =

     1
     3


ib =

     1
     3
```

`setxor` treats trailing white space in cell arrays of character vectors as distinct characters.

Symmetric Difference of Vectors of Different Classes and Shapes

Create a column vector character array.

```
A = ['A';'B';'C'], class(A)
```

```
A = 3×1 char array
    'A
     B
     C'

ans =
'char'
```

Create a row vector containing elements of numeric type `double`.

```
B = [66 67 68], class(B)
```

```
B =

    66    67    68
```

```
ans =
'double'
```

Find the symmetric difference of A and B.

```
C = setxor(A,B)
```

```
C = 2×1 char array
    'A
     D'
```

The result is a column vector character array.

```
class(C)
```

```
ans =
'char'
```

Symmetric Difference of Char and Cell Array of Character Vectors

Create a character vector, A.

```
A = ['cat';'dog';'fox';'pig'];
class(A)
```

```
ans =
'char'
```

Create a cell array of character vectors, B.

```
B={'dog','cat','fish','horse'};
class(B)
```

```
ans =
'cell'
```

Find the character vectors that are not in the intersection of A and B.

```
C = setxor(A,B)
```

```
C = 4×1 cell array
    'fish'
    'fox'
```

```
    'horse'
    'pig'
```

The result, C, is a cell array of character vectors.

```
class(C)
```

```
ans =
'cell'
```

Preserve Legacy Behavior of setxor

Use the `'legacy'` flag to preserve the behavior of `setxor` from R2012b and prior releases in your code.

Find the symmetric difference of A and B with the current behavior.

```
A = [5 1 3 3 3]; B = [4 1 2 2];
[C1,ia1,ib1] = setxor(A,B)
```

```
C1 =

     2     3     4     5


ia1 =

     3
     1


ib1 =

     3
     1
```

Find the symmetric difference and preserve the legacy behavior.

```
[C2,ia2,ib2] = setxor(A,B,'legacy')
```

```
C2 =
```

```
     2     3     4     5

ia2 =

     5     1

ib2 =

     4     1
```

Input Arguments

A, B — Input arrays

numeric arrays | logical arrays | character arrays | string arrays | categorical arrays | datetime arrays | duration arrays | cell arrays of character vectors | tables | timetables

Input arrays, specified as numeric arrays, logical arrays, character arrays, string arrays, categorical arrays, datetime arrays, duration arrays, cell arrays of character vectors, tables, or timetables. If you specify the `'rows'` option, A and B must have the same number of columns.

A and B must belong to the same class with the following exceptions:

- `logical`, `char`, and all numeric classes can combine with `double` arrays.
- Cell arrays of character vectors can combine with character arrays or string arrays.
- Categorical arrays can combine with character arrays, cell arrays of character vectors, or string arrays.
- Datetime arrays can combine with cell arrays of date character vectors or single date character vectors.

There are additional requirements for A and B based on data type:

- If A and B are both ordinal categorical arrays, they must have the same sets of categories, including their order. If neither A nor B are ordinal, they need not have the same sets of categories, and the comparison is performed using the category names. In this case, the categories of C are the sorted union of the categories from A and B.

- If A and B are tables or timetables, they must have the same variable names (except for order). For tables, row names are ignored, so that two rows that have the same values, but different names, are considered equal. For timetables, row times are taken into account, so that two rows that have the same values, but different times, are not considered equal.
- If A and B are datetime arrays, they must be consistent with each other in whether they specify a time zone.

A and B also can be objects with the following class methods:

- `sort` (or `sortrows` for the `'rows'` option)
- `eq`
- `ne`

The object class methods must be consistent with each other. These objects include heterogeneous arrays derived from the same root class. For example, A and B can be arrays of handles to graphics objects.

`setOrder` — Order flag

`'sorted'` (default) | `'stable'`

Order flag, specified as `'sorted'` or `'stable'`, indicates the order of the values (or rows) in C.

Order Flag	Meaning
`'sorted'`	The values (or rows) in C return in sorted order. For example: `C = setxor([5 1 3],[4 1 2],'sorted')` returns `C = [2 3 4 5]`.
`'stable'`	The values (or rows) in C return in the same order as in A and B. For example: `C = setxor([5 1 3],[4 1 2],'stable')` returns `C = [5 3 4 2]`.

Output Arguments

C — Symmetric difference array

vector | matrix | table | timetable

Symmetric difference array, returned as a vector, matrix, table, or timetable. If the inputs A and B are tables or timetables, then the order of the variables in C is the same as the order of the variables in A.

The following describes the shape of C when the inputs are vectors or matrices and when the `'legacy'` flag is not specified:

- If the `'rows'` flag is not specified, then C is a column vector unless both A and B are row vectors, in which case C is a row vector. For example, `setxor([],[1 2])` returns a column vector.
- If the `'rows'` flag is specified, then C is a matrix containing the rows of A and B that are not in the intersection.
- If all the values (or rows) of A are also in B, then C is empty.

The class of the inputs A and B determines the class of C:

- If the class of A and B are the same, then C is the same class.
- If you combine a `char` or nondouble numeric class with `double`, then C is the same class as the nondouble input.
- If you combine a `logical` class with `double`, then C is `double`.
- If you combine a cell array of character vectors with `char`, then C is a cell array of character vectors.
- If you combine a categorical array with a character vector, cell array of character vectors, or string, then C is a categorical array.
- If you combine a datetime array with a cell array of date character vectors or single date character vector, then C is a datetime array.
- If you combine a string array with a character vector or cell array of character vectors, then C is a string array.

`ia` — Index to A

column vector

Index to A, returned as a column vector when the `'legacy'` flag is not specified. `ia` identifies the values (or rows) in A that contribute to the symmetric difference. If there is a repeated value (or row) appearing exclusively in A, then `ia` contains the index to the first occurrence of the value (or row).

`ib` — Index to B

column vector

Index to B, returned as a column vector when the 'legacy' flag is not specified. ib identifies the values (or rows) in B that contribute to the symmetric difference. If there is a repeated value (or row) appearing exclusively in B, then ib contains the index to the first occurrence of the value (or row).

Tips

- To find the symmetric difference with respect to a subset of variables from a table or timetable, you can use column subscripting. For example, you can use setxor(A(:,*vars*),B(:,*vars*)), where *vars* is a positive integer, a vector of positive integers, a variable name, a cell array of variable names, or a logical vector. Alternatively, you can use vartype to create a subscript that selects variables of a specified type.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not support cell arrays for the first or second arguments.
- When you do not specify the 'rows' option:
  - Inputs A and B must be vectors with the same orientation. If you specify the 'legacy' option, then inputs A and B must be row vectors.
  - The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1.
  - The input [] is not supported. Use a 1-by-0 or 0-by-1 input, for example , zeros(1,0), to represent the empty set.
  - If you specify the 'legacy' option, then empty outputs are row vectors, 1-by-0, never 0-by-0.
- When you specify both the 'legacy' option and the 'rows' option, the outputs ia and ib are column vectors. If these outputs are empty, then they are 0-by-1. They are never 0-by-0, even if the output C is 0-by-0.

- When the `setOrder` is not `'stable'` or when you specify the `'legacy'` flag, the inputs must already be sorted in ascending order. The first output, `C`, is sorted in ascending order.
- Complex inputs must be `single` or `double`.
- When one input is complex and the other input is real, do one of the following:
  - Set `setOrder` to `'stable'`.
  - Sort the real input in complex ascending order (by absolute value). Suppose the real input is `x`. Use `sort(complex(x))` or `sortrows(complex(x))`.
- See "Code Generation for Complex Data with Zero-Valued Imaginary Parts" (MATLAB Coder).

See Also

See Also

`intersect` | `ismember` | `issorted` | `setdiff` | `sort` | `union` | `unique`

Topics

"Combine Categorical Arrays"

Introduced before R2006a

shading

Set color shading properties

Syntax

```
shading flat
shading faceted
shading interp
shading(axes_handle,...)
```

Description

The `shading` function controls the color shading of surface and patch graphics objects.

`shading flat` each mesh line segment and face has a constant color determined by the color value at the endpoint of the segment or the corner of the face that has the smallest index or indices.

`shading faceted` flat shading with superimposed black mesh lines. This is the default shading mode.

`shading interp` varies the color in each line segment and face by interpolating the colormap index or true color value across the line or face.

`shading(axes_handle,...)` applies the shading type to the objects in the axes specified by `axes_handle`, instead of the current axes. Use single quotes when using a function form. For example:

```
shading(gca,'interp')
```

Examples

Display Sphere with Different Types of Shading

Plot the `sphere` function and use different types of shading.

```
figure
subplot(2,2,1)
sphere(16)
title('Faceted Shading (Default)')

subplot(2,2,2)
sphere(16)
shading flat
title('Flat Shading')

subplot(2,2,3)
sphere(16)
shading interp
title('Interpolated Shading')
```

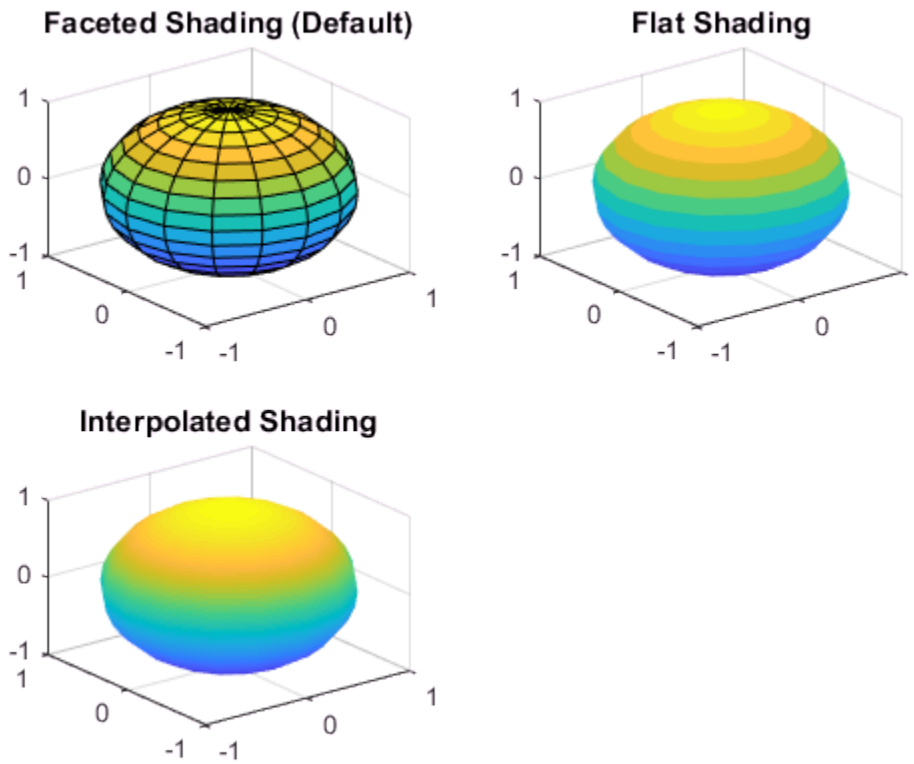

Algorithms

`shading` sets the `EdgeColor` and `FaceColor` properties of all surface and patch graphics objects in the current axes. `shading` sets the appropriate values, depending on whether the surface or patch objects represent meshes or solid surfaces.

See Also

`fill` | `fill3` | `hidden` | `light` | `lighting` | `mesh` | `patch` | `pcolor` | `surf`

Introduced before R2006a

shg

Show most recent graph window

Syntax

```
shg
```

Description

`shg` makes the current figure visible and raises it above all other figures on the screen. This is identical to using the command `figure(gcf)`.

See Also

`figure` | `gca` | `gcf`

shiftdim

Shift dimensions

Syntax

```
B = shiftdim(X,n)
[B,nshifts] = shiftdim(X)
```

Description

`B = shiftdim(X,n)` shifts the dimensions of `X` by `n`. When `n` is positive, `shiftdim` shifts the dimensions to the left and wraps the `n` leading dimensions to the end. When `n` is negative, `shiftdim` shifts the dimensions to the right and pads with singletons.

`[B,nshifts] = shiftdim(X)` returns the array `B` with the same number of elements as `X` but with any leading singleton dimensions removed. A singleton dimension is any dimension for which `size(A,dim) = 1`. `nshifts` is the number of dimensions that are removed.

If `X` is a scalar, `shiftdim` has no effect.

Examples

Shift Array Dimensions

Shift the dimensions of an array.

Compute a 5-D array `A`, and remove the leading dimensions of length 1. The `shiftdim` function shifts 2 dimensions and returns the 3-D array `B`.

```
A = rand(1,1,3,2,4);
[B,nshifts] = shiftdim(A);
nshifts
```

```
nshifts = 2
```

```
size(B)
```

```
ans =

     3     2     4
```

Shift the dimensions of B twice to the left.

```
C = shiftdim(B,2);
size(C)
```

```
ans =

     4     3     2
```

Shift the dimensions of C once to the right.

```
D = shiftdim(C,-1);
size(D)
```

```
ans =

     1     4     3     2
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays for the first argument.
- Second argument must be a constant.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

`circshift` | `reshape` | `squeeze` | `permute` | `ipermute`

Introduced before R2006a

showplottool

Show or hide figure plot tool

Syntax

```
showplottool('tool')
showplottool('on','tool')
showplottool('off','tool')
showplottool('toggle','tool')
showplottool(figure_handle,...)
```

Description

`showplottool('tool')` shows the specified plot tool on the current figure. `'tool'` can be one of these values:

- `'figurepalette'`
- `'plotbrowser'`
- `'propertyeditor'`

`showplottool('on','tool')` shows the specified plot tool on the current figure.

`showplottool('off','tool')` hides the specified plot tool on the current figure.

`showplottool('toggle','tool')` toggles the visibility of the specified plot tool on the current figure.

`showplottool(figure_handle,...)` operates on the specified figure instead of the current figure.

Note: When you dock, undock, resize, or reposition a plotting tool and then close it, it will still be configured as you left it the next time you open it. There is no command to reset plotting tools to their original, default locations.

Examples

Open One of the Plot Tools

Create a simple plot and open the property editor.

```
plot(1:10);
showplottool('propertyeditor')
```

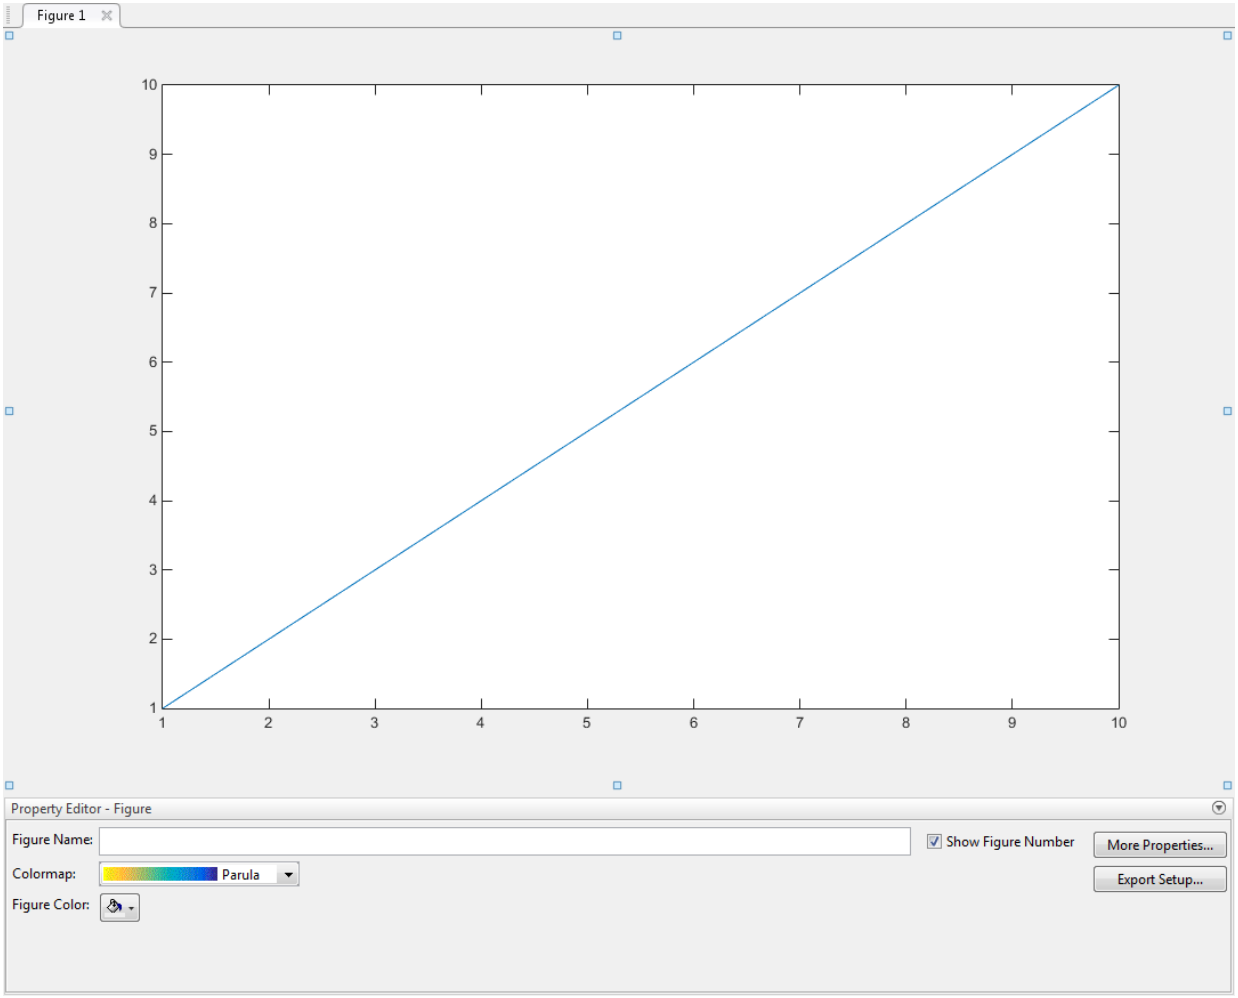

Alternatives

Click the larger Plotting Tools icon on the figure toolbar to collectively enable plotting tools, and the smaller icon to collectively disable them. Individually select

the **Figure Palette**, **Plot Browser**, and **Property Editor** tools from the figure's **View** menu. For details, see “Customize Graph Using Plot Tools”.

See Also

`figurepalette` | `plotbrowser` | `plottools` | `propertyeditor`

Introduced before R2006a

shrinkfaces

Reduce size of patch faces

Syntax

```
shrinkfaces(p,sf)
nfv = shrinkfaces(p,sf)
nfv = shrinkfaces(fv,sf)
shrinkfaces(p)
nfv = shrinkfaces(f,v,sf)
[nf,nv] = shrinkfaces(...)
```

Description

`shrinkfaces(p,sf)` shrinks the area of the faces in patch `p` to shrink factor `sf`. A shrink factor of 0.6 shrinks each face to 60% of its original area. If the patch contains shared vertices, the MATLAB software creates nonshared vertices before performing the face-area reduction.

`nfv = shrinkfaces(p,sf)` returns the face and vertex data in the struct `nfv`, but does not set the Faces and Vertices properties of patch `p`.

`nfv = shrinkfaces(fv,sf)` uses the face and vertex data from the struct `fv`.

`shrinkfaces(p)` and `shrinkfaces(fv)` (without specifying a shrink factor) assume a shrink factor of 0.3.

`nfv = shrinkfaces(f,v,sf)` uses the face and vertex data from the arrays `f` and `v`.

`[nf,nv] = shrinkfaces(...)` returns the face and vertex data in two separate arrays instead of a struct.

Examples

Reduce Size of Patch Faces

Load the flow data set, which represents the speed profile of a submerged jet within an infinite tank. Create two isosurfaces that provide a before and after view of the effects of shrinking the face size.

Sample the flow data at every other point using `reducevolume` and then use `isosurface` to generate the faces and vertices data. Draw the first isosurface. Then set up the view and add a title.

```
[x,y,z,v] = flow;
[x,y,z,v] = reducevolume(x,y,z,v,2);
fv = isosurface(x,y,z,v,-3);
p1 = patch(fv);
p1.FaceColor = 'red';
p1.EdgeColor = [0.5 0.5 0.5];
daspect([1 1 1]);
view(3);
axis tight
title('Original')
```

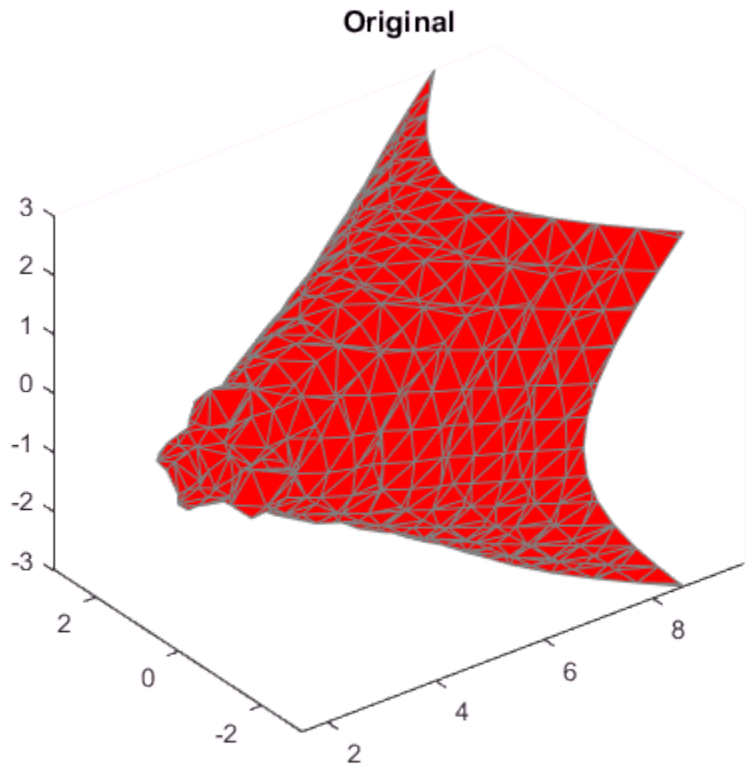

Use `shrinkfaces` to modify the face and vertex data and draw a second patch.

```
figure
p2 = patch(shrinkfaces(fv,.3));
p2.FaceColor = 'red';
p2.EdgeColor = [0.5 0.5 0.5];
daspect([1 1 1]);
view(3);
axis tight
title('After Shrinking')
```

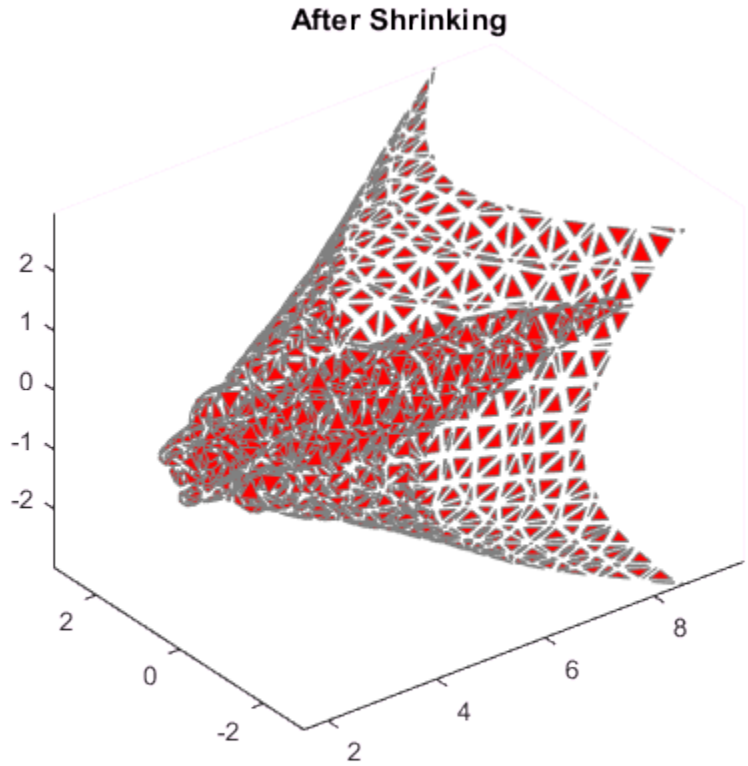

See Also

`isosurface` | `patch` | `reducevolume` | `daspect` | `view` | `axis`

Introduced before R2006a

sign

Sign function (signum function)

Syntax

```
sign(x)
```

Description

Y = `sign(x)` returns an array `Y` the same size as `x`, where each element of `Y` is:

- `1` if the corresponding element of `x` is greater than `0`.
- `0` if the corresponding element of `x` equals `0`.
- `-1` if the corresponding element of `x` is less than `0`.
- `x./abs(x)` if `x` is complex.

Examples

Find Sign Function

Find the sign function of a number.

```
sign(2)
```

```
ans = 1
```

Find the sign function of the values of a vector.

```
V = [-11 0 1.5 Inf NaN];
sign(V)
```

```
ans =

    -1     0     1     1   NaN
```

Find the sign function of the values of a matrix.

```
M = magic(3) - 5;
sign(M)
```

```
ans =

     1    -1     1
    -1     0     1
    -1     1    -1
```

Find the sign function of a complex number.

```
z = 4 - 3*i;
sign(z)
```

```
ans =
   0.8000 - 0.6000i
```

Plot Sign Function

Plot the sign function and show its behavior at the zero-crossing. Use `eps` to represent values just above and below `0`.

```
x = [-5 -eps(1) 0 eps(1) 5];
y = sign(x);
plot(x,y)
ylim([-2 2])
grid on
```

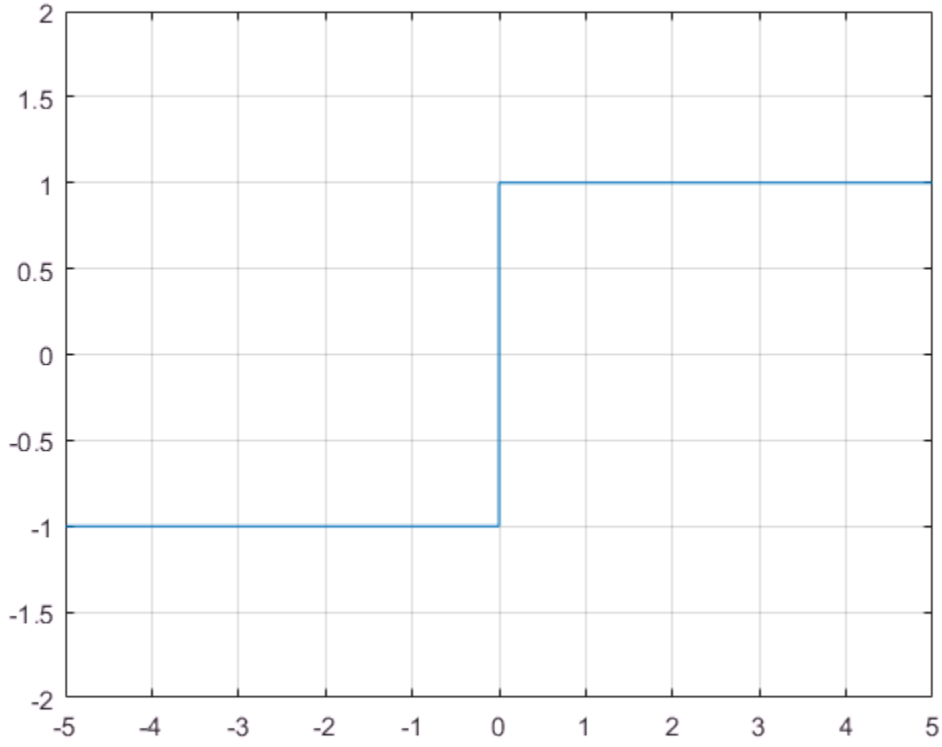

Plot Real and Imaginary Parts of Sign Function

Plot real and imaginary parts of the sign function over $-3 < x < -3$ and $-3 < y < 3$.

First, create a mesh of values over `-3 < x < 3` and `-3 < y < 3` using `meshgrid`. Then create complex numbers from these values using `z = x + 1i*y`.

```
v = -3:0.1:3;
[x, y] = meshgrid(v);
z = x + 1i*y;
```

Find the real and imaginary parts of the sign function of `z`.

```
s = sign(z);
re = real(s);
im = imag(s);
```

Plot the real and imaginary parts.

```
surf(x,y,re)
title('Real part of sign function')
xlabel('x')
ylabel('y')
```

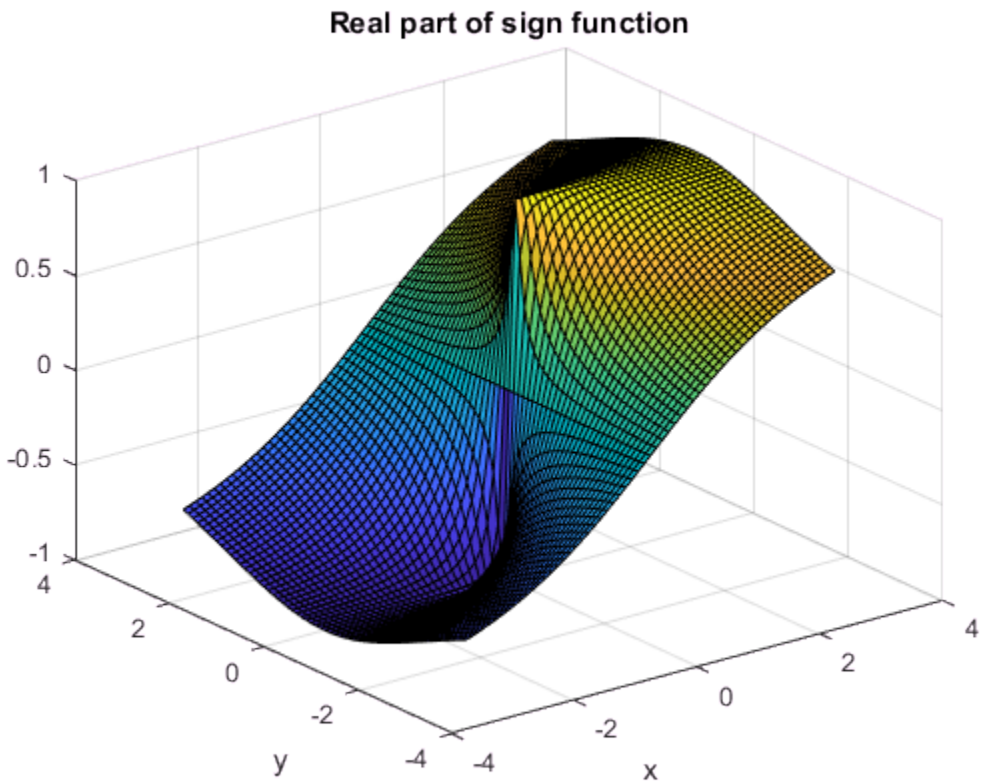


```
figure(2)
surf(x,y,im)
title('Imaginary part of sign function')
```

```
xlabel('x')
ylabel('y')
```

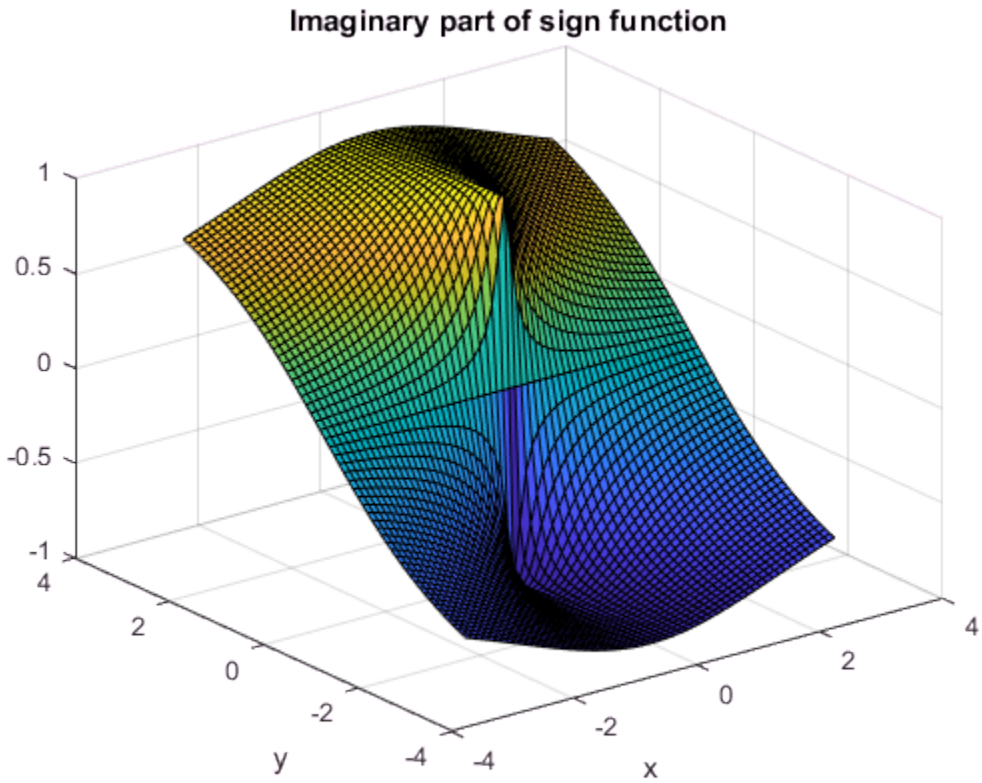

Input Arguments

x — Input

number | vector | matrix | multidimensional array

Input, specified as a number, vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

Complex Number Support: Yes

Definitions

Sign Function

The value of the sign function, sign(x), for:

- $x > 0$ is 1.
- $x = 0$ is 0.
- $x < 0$ is -1.
- complex x is $x/|x|$.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`abs` | `conj` | `imag` | `real`

Introduced before R2006a

sin

Sine of argument in radians

Syntax

```
Y = sin(X)
```

Description

`Y = sin(X)` returns the sine of the elements of `X`. The `sin` function operates element-wise on arrays. The function accepts both real and complex inputs. For real values of `X` in the interval [-Inf, Inf], `sin` returns real values in the interval [-1 ,1]. For complex values of `X`, `sin` returns complex values. All angles are in radians.

Examples

Plot Sine Function

Plot the sine function over the domain $-\pi \le x \le \pi$.

```
x = -pi:0.01:pi;
plot(x,sin(x)), grid on
```

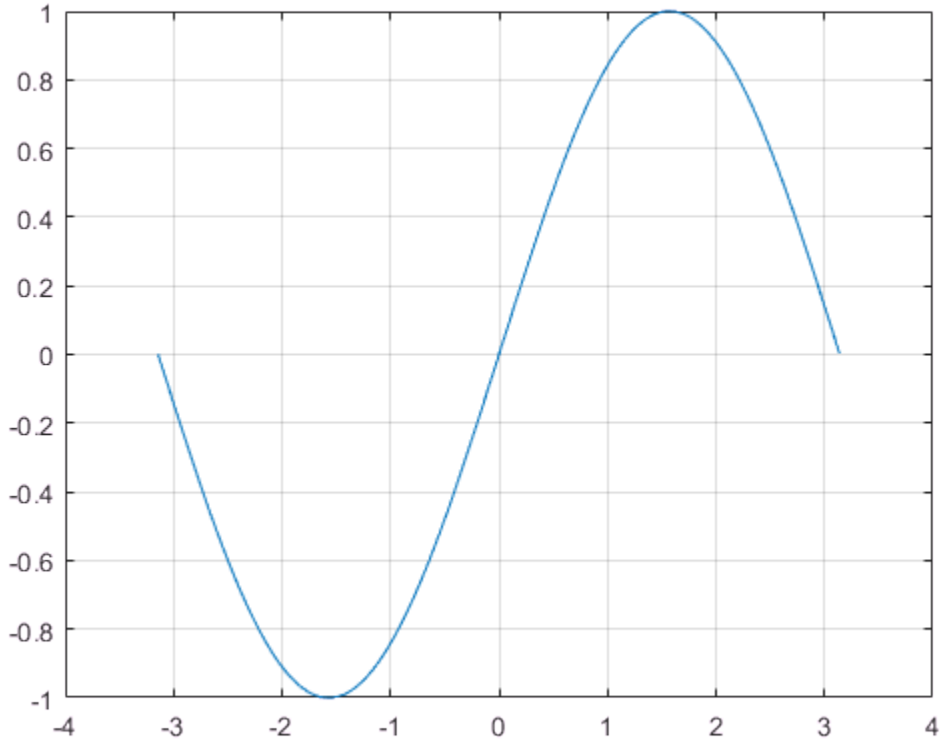

Sine of Vector of Complex Angles

Calculate the sine of the complex angles in vector `x`.

```
x = [-i pi+i*pi/2 -1+i*4];
y = sin(x)
```

```
y =
   0.0000 - 1.1752i   0.0000 - 2.3013i -22.9791 +14.7448i
```

Input Arguments

X — Input angle in radians

scalar | vector | matrix | multidimensional array

Input angle in radians, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Sine of input angle

scalar | vector | matrix | multidimensional array

Sine of input angle, returned as a real-valued or complex-valued scalar, vector, matrix or multidimensional array.

Definitions

Sine Function

The sine of an angle, α, defined with reference to a right angled triangle is

$$\sin(\alpha) = \frac{\text{opposite side}}{\text{hypotenuse}} = \frac{a}{h}.$$

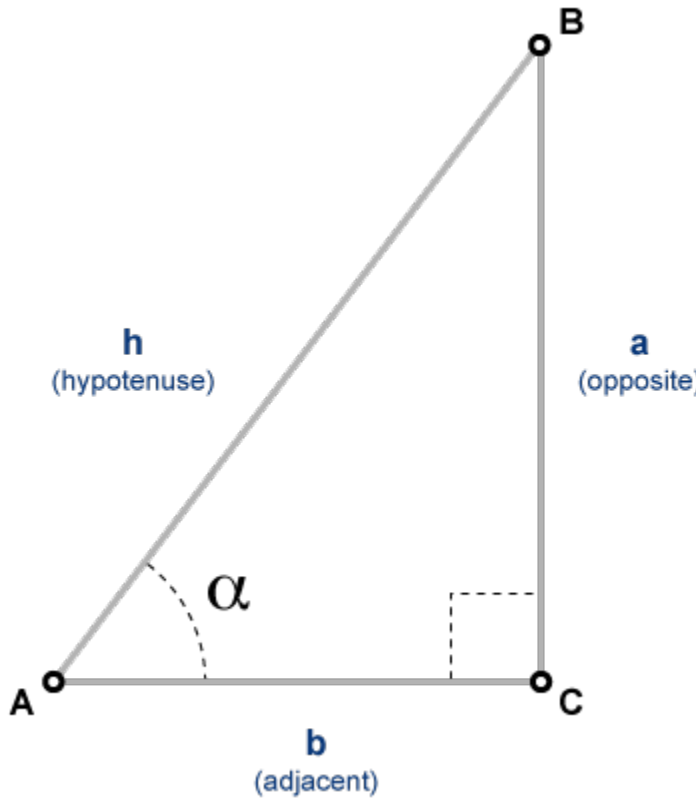

The sine of a complex angle, α, is

$$\sin(\alpha) = \frac{e^{i\alpha} - e^{-i\alpha}}{2i}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`asin` | `asind` | `sind` | `sinh`

Introduced before R2006a

sind

Sine of argument in degrees

Syntax

```
Y = sind(X)
```

Description

`Y = sind(X)` returns the sine of the elements in `X`, which are expressed in degrees.

Examples

Sine of 180 degrees compared to sine of π radians

```
sind(180)
```

```
ans = 0
```

```
sin(pi)
```

```
ans = 1.2246e-16
```

Sine of vector of complex angles, specified in degrees

```
z = [90+i 15+2i 10+3i];
y = sind(z)
```

```
y =
   1.0002 + 0.0000i   0.2590 + 0.0337i   0.1739 + 0.0516i
```

Input Arguments

X — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `sind` operation is element-wise when `X` is nonscalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

`Y` — Sine of angle
scalar value | vector | matrix | N-D array

Sine of angle, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also
`asin` | `asind` | `sin`

Introduced before R2006a

single

Convert to single precision

Syntax

```
B = single(A)
```

Description

`B = single(A)` converts the matrix `A` to single precision, returning that value in `B`. `A` can be any numeric object (such as a `double`). If `A` is already single precision, `single` has no effect. Single-precision quantities require less storage than double-precision quantities, but have less precision and a smaller range.

The `single` class is primarily meant to be used to store single-precision values. Hence most operations that manipulate arrays without changing their elements are defined. Examples are `reshape`, `size`, the relational operators, subscripted assignment, and subscripted reference.

You can define your own methods for the `single` class by placing the appropriately named method in an `@single` folder within a folder on your path.

Examples

```
a = magic(4);
b = single(a);

whos
  Name      Size         Bytes  Class

  a         4x4            128  double array
  b         4x4             64  single array
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cast` | `double` | `typecast`

Topics

“Floating-Point Numbers”

Introduced before R2006a

sinh

Hyperbolic sine of argument in radians

Syntax

```
Y = sinh(X)
```

Description

The `sinh` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

`Y = sinh(X)` returns the hyperbolic sine of the elements of `X`.

Examples

Graph of Hyperbolic Sine Function

Graph the hyperbolic sine over the domain $-5 \le x \le 5$.

```
x = -5:0.01:5;
plot(x,sinh(x)), grid on
```

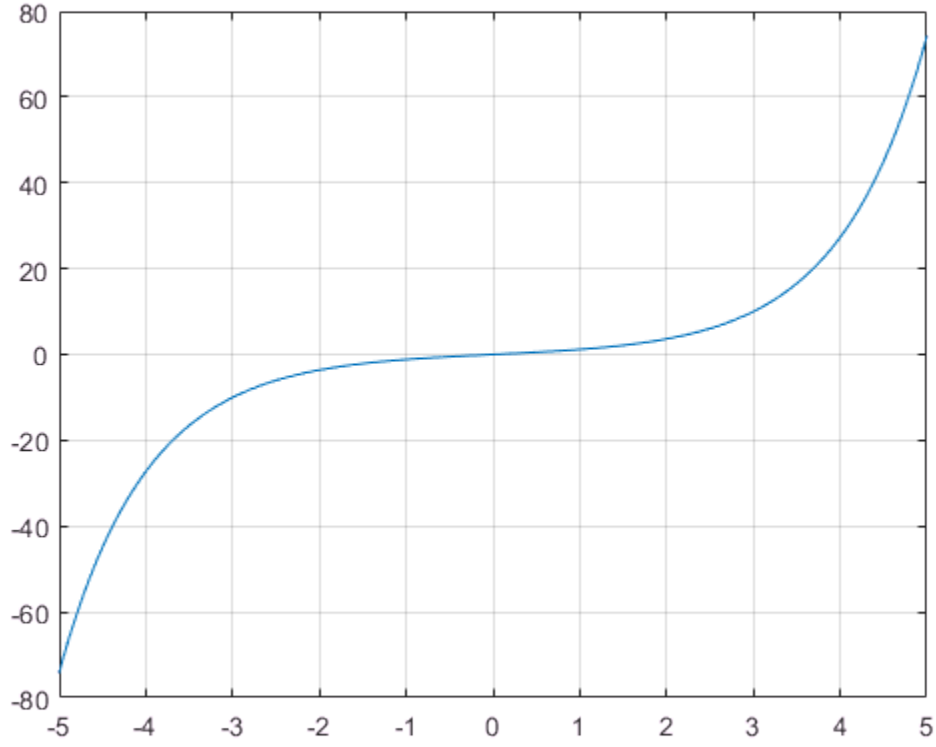

Definitions

Hyperbolic Sine

The hyperbolic sine of z is

$$\sinh(z) = \frac{e^z - e^{-z}}{2}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`sin` | `asinh` | `cosh`

Introduced before R2006a

size

Array size

Syntax

```
sz = size(A)
szdim = size(A,dim)
[m,n] = size(A)
[sz1,...,szN] = size(A)
```

Description

`sz = size(A)` returns a row vector whose elements contain the length of the corresponding dimension of `A`. For example, if `A` is a 3-by-4 matrix, then `size(A)` returns the vector `[3 4]`. The length of `sz` is `ndims(A)`.

If `A` is a table or timetable, then `size(A)` returns a two-element row vector consisting of the number of rows and the number of table variables.

`szdim = size(A,dim)` returns the length of dimension `dim`.

`[m,n] = size(A)` returns the number of rows and columns when `A` is a matrix.

`[sz1,...,szN] = size(A)` returns the length of each dimension of `A` separately.

Examples

Size of Matrix

Create a random matrix and compute the number of rows and columns.

```
A = rand(4,3);
[m,n] = size(A)
```

```
m = 4
```

```
n = 3
```

Size of 3-D Array

Create a random 3-D array and find its size.

```
A = rand(2,3,4);
sz = size(A)
```

```
sz =

     2     3     4
```

Find only the length of the second dimension of A.

```
szdim2 = size(A,2)
```

```
szdim2 = 3
```

Assign the length of each dimension to a separate variable.

```
[sz1,sz2,sz3] = size(A)
```

```
sz1 = 2

sz2 = 3

sz3 = 4
```

Size of Table

Create a table with 5 rows and 4 variables.

```
LastName = {'Smith';'Johnson';'Williams';'Jones';'Brown'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];

A = table(Age,Height,Weight,BloodPressure,'RowNames',LastName)
```

```
A = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Smith       38     71        176       124      93
```

```
    Johnson      43      69         163        109      77
    Williams     38      64         131        125      83
    Jones        40      67         133        117      75
    Brown        49      64         119        122      80
```

Find the size of the table. Although the `BloodPressure` variable contains two columns, `size` only counts the number of variables.

```
sz = size(A)
```

```
sz =

     5     4
```

Multiple Output Arguments

Create a 3-D array and assign the length of each dimension to a separate variable. Each output argument corresponds to one dimension of `A`.

```
A = ones(3,4,5);
[sz1,sz2,sz3] = size(A)
```

```
sz1 = 3

sz2 = 4

sz3 = 5
```

Specify only two output arguments when computing the size of `A`. Since a third output argument is not specified, the lengths of the second and third dimensions of `A` are collapsed into `sz2`.

```
[sz1,sz2] = size(A)
```

```
sz1 = 3

sz2 = 20
```

Specify more than three output variables when computing the size of `A`. The fourth and fifth output arguments are set to 1.

```
[sz1,sz2,sz3,sz4,sz5] = size(A)
```

```
sz1 = 3
```

```
sz2 = 4

sz3 = 5

sz4 = 1

sz5 = 1
```

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, a vector, a matrix, or a multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `function_handle` | `cell` | `categorical` | `datetime` | `duration` | `calendarDuration` | `table` | `timetable`
Complex Number Support: Yes

dim — Queried dimension

positive integer scalar

Queried dimension, specified as a positive integer scalar. `size` returns the length of dimension `dim` of `A`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

sz — Array size

row vector of nonnegative integers

Array size, returned as a row vector of nonnegative integers. Each element of the vector represents the length of the corresponding dimension of `A`. If `A` is a scalar, then `sz` is the row vector `[1 1]`. If `A` is a table or timetable, then `sz` is a two-element row vector containing the number of rows and the number of variables. Multiple columns within a single variable are not counted.

Data Types: `double`

`szdim` — Length of specified dimension
nonnegative integer scalar

Length of specified dimension, returned as a nonnegative integer scalar.

Data Types: `double`

`m` — Number of rows
nonnegative integer scalar

Number of rows, returned as a nonnegative integer scalar when `A` is a matrix.

Data Types: `double`

`n` — Number of columns
nonnegative integer scalar

Number of columns, returned as a nonnegative integer scalar when `A` is a matrix.

Data Types: `double`

`sz1,...,szN` — Dimension lengths
nonnegative integer scalars

Dimension lengths, returned as nonnegative integer scalars. When the specified number of output arguments is equal to `ndims(A)`, then each argument is the length of the corresponding dimension of `A`. If more than `ndims(A)` output arguments are specified, then the extra output arguments are set to 1. For example, for a matrix `A` with size `[4 5]`, `[sz1,sz2,sz3] = size(A)` returns `sz1 = 4`, `sz2 = 5`, and `sz3 = 1`.

If fewer than `ndims(A)` output arguments are specified, then all remaining dimension lengths are collapsed into the last argument in the list. For example, if `A` is a 3-D array with size `[3 4 5]`, then `[sz1,sz2] = size(A)` returns `sz1 = 3` and `sz2 = 20`.

Data Types: `double`

Tips

- To determine if an array is empty, a scalar, or a matrix, use the functions `isempty`, `isscalar`, and `ismatrix`. You can also determine the orientation of a vector with the `isrow` and `iscolumn` functions.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`height` | `length` | `ndims` | `numel` | `width`

Introduced before R2006a

size

Class: containers.Map
Package: containers

Size of `containers.Map` object

Syntax

```
dim = size(mapObj,1)
dimVector = size(mapObj)
[dim1,dim2,...,dimN] = size(mapObj)
```

Description

`dim = size(mapObj,1)` returns a scalar numeric value that indicates the number of key-value pairs in `mapObj`. If you call `size` with a numeric second input argument other than `1`, the `size` method returns the scalar numeric value `1`.

`dimVector = size(mapObj)` returns a two-element vector `[k,1]`, where `k` is the number of key-value pairs in `mapObj`.

`[dim1,dim2,...,dimN] = size(mapObj)` returns `[k,1,...,1]`.

Input Arguments

`mapObj`

Object of class containers.Map.

Output Arguments

`dim`

Scalar numeric value that indicates the number of key-value pairs in `mapObj`.

dimVector

Two-element numeric vector `[k,1]`, where `k` is the number of key-value pairs in `mapObj`.

[dim1,dim2,...,dimN]

Numeric scalar values. Variable `dim1` equals `k`, where `k` is the number of key-value pairs in `mapObj`. All other outputs equal `1`.

Examples

Determine the Size of a Map

Construct a map and find the number of key-value pairs:

```
myKeys = {'a','b','c'};
myValues = [1,2,3];
mapObj = containers.Map(myKeys,myValues);
dim = size(mapObj,1)
```

This code returns a scalar numeric value:

```
dim =

     3
```

If you do not specify a second input argument,

```
dimVector = size(mapObj)
```

then the `size` method returns a vector:

```
dimVector =

     3     1
```

See Also

isKey | keys | values | containers.Map | length

size

Class: matlab.io.MatFile
Package: matlab.io

Array dimensions

Syntax

```
allDims = size(matObj,variable)
[dim1,...,dimN] = size(matObj,variable)
selectedDim = size(matObj,variable,dim)
```

Description

`allDims = size(matObj,variable)` returns the size of each dimension of the specified variable in the file corresponding to `matObj`. Output `allDims` is a `1`-by-`m` vector, where `m = ndims(variable)`.

`[dim1,...,dimN] = size(matObj,variable)` returns the sizes of each dimension in separate output variables `dim1,...,dimN`.

`selectedDim = size(matObj,variable,dim)` returns the size of the specified dimension.

Input Arguments

`matObj`

Object created by the `matfile` function.

`variable`

String enclosed in single quotation marks that specifies the name of a variable in the MAT-file corresponding to `matObj`.

dim

Nonzero positive scalar integer that specifies a dimension of the variable.

Output Arguments

allDims

1-by-m vector of sizes of the dimensions of the specified variable, where `m = ndims(variable)`.

dim1,...,dimN

Scalar numeric values, where `dimK` contains the size of the `K`th dimension of `variable`:

- If `N` < `ndims(variable)`, then `dimN`, equals the product of the sizes of dimensions `N` through `ndims(variable)`.
- If `N` > `ndims(variable)`, the `size` method returns ones in the output variables corresponding to dimensions `ndims(variable)+1` through `N`.

selectedDim

Scalar numeric value that contains the size of the selected dimension for the specified variable.

Examples

Find the size of the matrix `topo` in `topography.mat` without loading any data:

```
matObj = matfile('topography.mat');
[nrows,ncols] = size(matObj,'topo');
```

Determine the dimensions of a variable, and process one part of the variable at a time. In this case, calculate and store the average of each column of variable `stocks` in the example file `stocks.mat`:

```
filename = 'stocks.mat';
matObj = matfile(filename);
[nrows, ncols] = size(matObj,'stocks');
```

```
avgs = zeros(1,ncols);
for idx = 1:ncols
    avgs(idx) = mean(matObj.stocks(:,idx));
end
```

Create a three-dimensional array, and call the `size` method with different numbers of output arguments:

```
matObj = matfile('temp.mat','Writable',true);
matObj.X = rand(2,3,4);

d = size(matObj,'X')
d2 = size(matObj,'X',2)
[m,n] = size(matObj,'X')
[m1,m2,m3,m4] = size(matObj,'X')
```

This code returns

```
d =
     2     3     4

d2 =
     3

m =
     2
n =
    12

m1 =
     2
m2 =
     3
m3 =
     4
m4 =
     1
```

Tips

- Do not call `size` with the syntax `size(matObj.variable)`. This syntax loads the entire contents of the variable into memory. For very large variables, this load operation results in `Out of Memory` errors.

See Also

whos | `matfile`

size (serial)

Size of serial port object array

Syntax

```
d = size(obj)
[m,n] = size(obj)
[m1,m2,m3,...,mn] = size(obj)
m = size(obj,dim)
```

Description

`d = size(obj)` returns the two-element row vector `d` containing the number of rows and columns in the serial port object, `obj`.

`[m,n] = size(obj)` returns the number of rows, `m` and columns, `n` in separate output variables.

`[m1,m2,m3,...,mn] = size(obj)` returns the length of the first `n` dimensions of `obj`.

`m = size(obj,dim)` returns the length of the dimension specified by the scalar `dim`. For example, `size(obj,1)` returns the number of rows.

See Also

`length`

Introduced before R2006a

size

Class: TriRep

(Not recommended) Size of triangulation matrix

Note: `size(TriRep)` is not recommended. Use size(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
size(TR)
```

Description

`size(TR)` provides size information for a triangulation matrix. The matrix is of size `mtri`-by-`nv`, where `mtri` is the number of simplices and `nv` is the number of vertices per simplex (triangle/tetrahedron, etc).

Input Arguments

`TR`	Triangulation matrix

Definitions

Simplex

A simplex is a triangle/tetrahedron or higher-dimensional equivalent.

See Also

`size` | triangulation | delaunayTriangulation

size (tscollection)

Size of `tscollection` object

Syntax

```
size(tsc)
```

Description

`size(tsc)` returns `[n m]`, where `n` is the length of the time vector and `m` is the number of `tscollection` members.

See Also

`length (tscollection)` | `isempty (tscollection)` | `tscollection`

Introduced before R2006a

slice

Volumetric slice plot



Syntax

```
slice(V,sx,sy,sz)
slice(X,Y,Z,V,sx,sy,sz)
slice(V,XI,YI,ZI)
slice(X,Y,Z,V,XI,YI,ZI)
slice(...,'method')
slice(ax,...)
h = slice(...)
```

Description

`slice` displays orthogonal slice planes through volumetric data.

`slice(V,sx,sy,sz)` draws slices along the *x*, *y*, *z* directions in the volume `V` at the points in the vectors `sx`, `sy`, and `sz`. `V` is an *m*-by-*n*-by-*p* volume array containing data values at the default location `X = 1:n`, `Y = 1:m`, `Z = 1:p`. Each element in the vectors `sx`, `sy`, and `sz` defines a slice plane in the *x*-, *y*-, or *z*-axis direction.

`slice(X,Y,Z,V,sx,sy,sz)` draws slices of the volume `V`. `X`, `Y`, and `Z` are three-dimensional arrays specifying the coordinates for `V`. `X`, `Y`, and `Z` must be monotonic and orthogonally spaced (as if produced by the function `meshgrid`). The color at each point is determined by 3-D interpolation into the volume `V`.

`slice(V,XI,YI,ZI)` draws data in the volume `V` for the slices defined by `XI`, `YI`, and `ZI`. `XI`, `YI`, and `ZI` are matrices that define a surface, and the volume is evaluated at the surface points. `XI`, `YI`, and `ZI` must all be the same size.

`slice(X,Y,Z,V,XI,YI,ZI)` draws slices through the volume `V` along the surface defined by the arrays `XI`, `YI`, `ZI`.

`slice(...,'method')` specifies the interpolation method. `'method'` is `'linear'`, `'cubic'`, or `'nearest'`.

- `linear` specifies trilinear interpolation (the default).
- `cubic` specifies tricubic interpolation.
- `nearest` specifies nearest-neighbor interpolation.

`slice(ax,...)` plots into the axes with the handle `ax` instead of into the current axes object (`gca`). The axes `clim` property is set to span the finite values of `V`.

`h = slice(...)` returns a vector of handles to surface graphics objects.

Examples

Create Volumetric Slice Plot

Visualize the function $v = xe^{-x^2-y^2-z^2}$ over the range `[-2,2]` for x, y, and z.

```
[x,y,z] = meshgrid(-2:.2:2,-2:.25:2,-2:.16:2);
v = x.*exp(-x.^2-y.^2-z.^2);
xslice = [-1.2,.8,2];
yslice = 2;
zslice = [-2,0];
slice(x,y,z,v,xslice,yslice,zslice)
colormap hsv
```

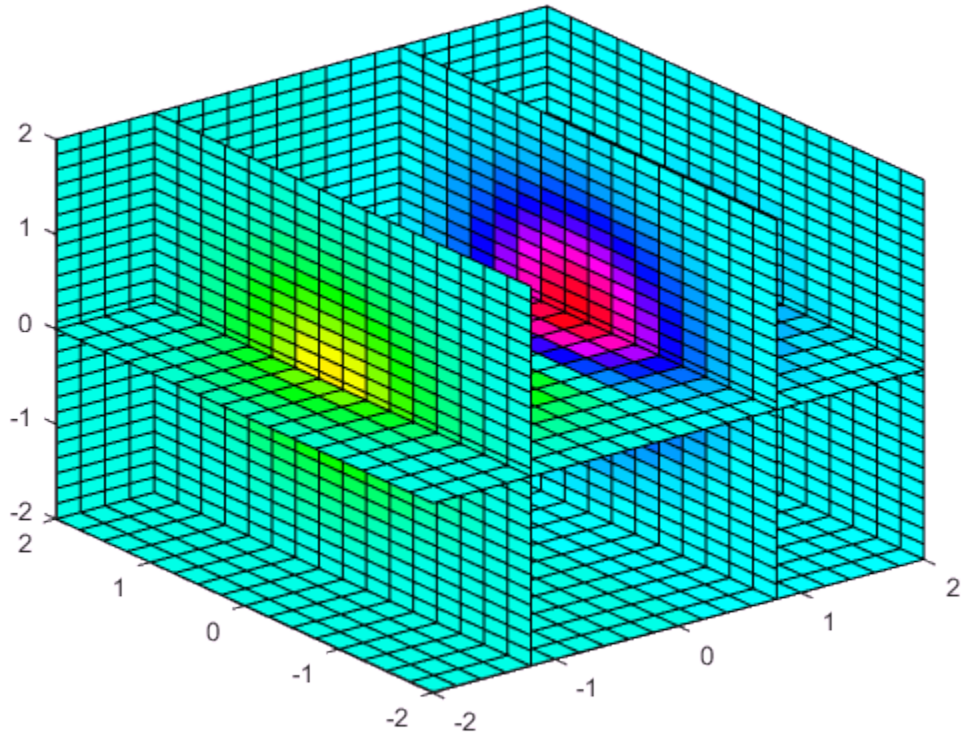

Slice at Arbitrary Angles

Create slices that are oriented in arbitrary planes. To do this:

- Create a slice surface in the domain of the volume.
- Orient this surface with respect to the axes.
- Get the `XData`, `YData`, and `ZData` of the surface.
- Use this data to draw the slice plane within the volume.

Starting in R2014b, you can use dot notation to set and query properties. If you are using an earlier release, use the `set` and `get` functions instead, such as `xd = get(hsp,'XData')`.

```
[x,y,z] = meshgrid(-2:.2:2,-2:.25:2,-2:.16:2);
v = x.*exp(-x.^2-y.^2-z.^2);
figure
colormap hsv

for k = -2:.05:2
   hsp = surf(linspace(-2,2,20),linspace(-2,2,20),...
      zeros(20) + k);
   rotate(hsp,[1,-1,1],30)
   xd = hsp.XData;
   yd = hsp.YData;
   zd = hsp.ZData;
   delete(hsp)

   slice(x,y,z,v,[-2,2],2,-2)
   hold on
   slice(x,y,z,v,xd,yd,zd)
   hold off
   view(-5,10)
   axis([-2.5 2.5 -2 2 -2 4])
   drawnow
end
```

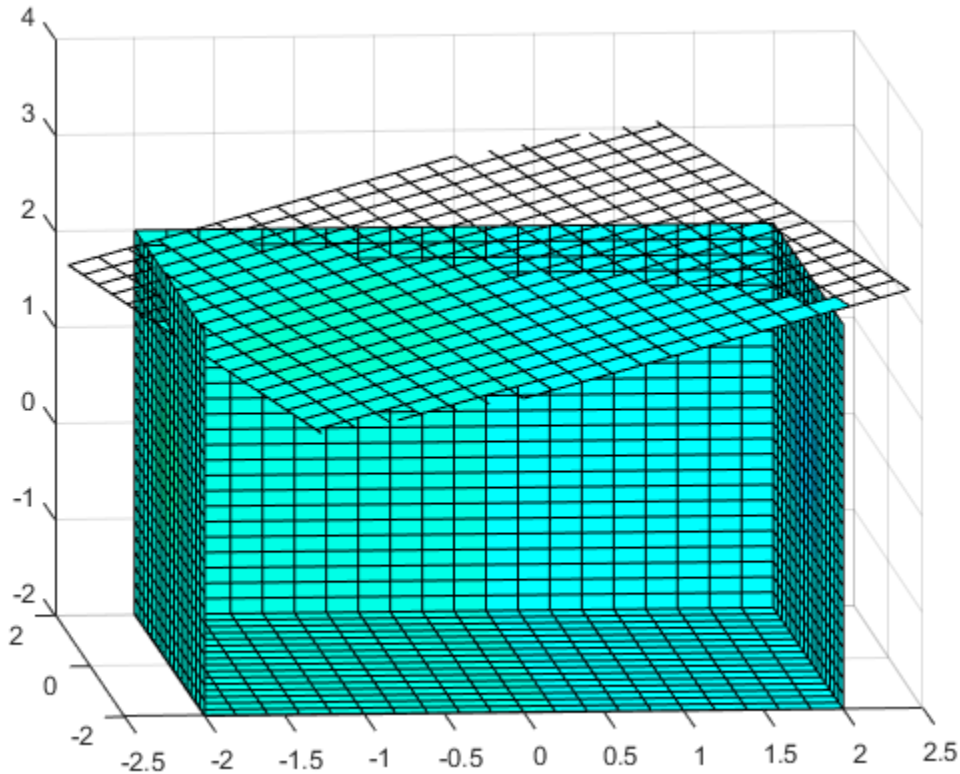

Slicing with a Nonplanar Surface

You can slice the volume with any surface. This example probes the volume created in the previous example by passing a spherical slice surface through the volume.

Starting in R2014b, you can use dot notation to set and query properties. If you are using an earlier release, use the `get` and `set` functions instead, such as `xd = get(hsp,'XData')`.

```
[x,y,z] = meshgrid(-2:.2:2,-2:.25:2,-2:.16:2);
v = x.*exp(-x.^2-y.^2-z.^2);
[xsp,ysp,zsp] = sphere;
slice(x,y,z,v,[-2,2],2,-2)
colormap hsv
```

```
for i = -3:.2:3
   hsp = surface(xsp+i,ysp,zsp);
   rotate(hsp,[1 0 0],90)
   xd = hsp.XData;
   yd = hsp.YData;
   zd = hsp.ZData;
   delete(hsp)
   hold on
   hslicer = slice(x,y,z,v,xd,yd,zd);
   axis tight
   xlim([-3,3])
   view(-10,35)
   drawnow
   delete(hslicer)
   hold off
end
```

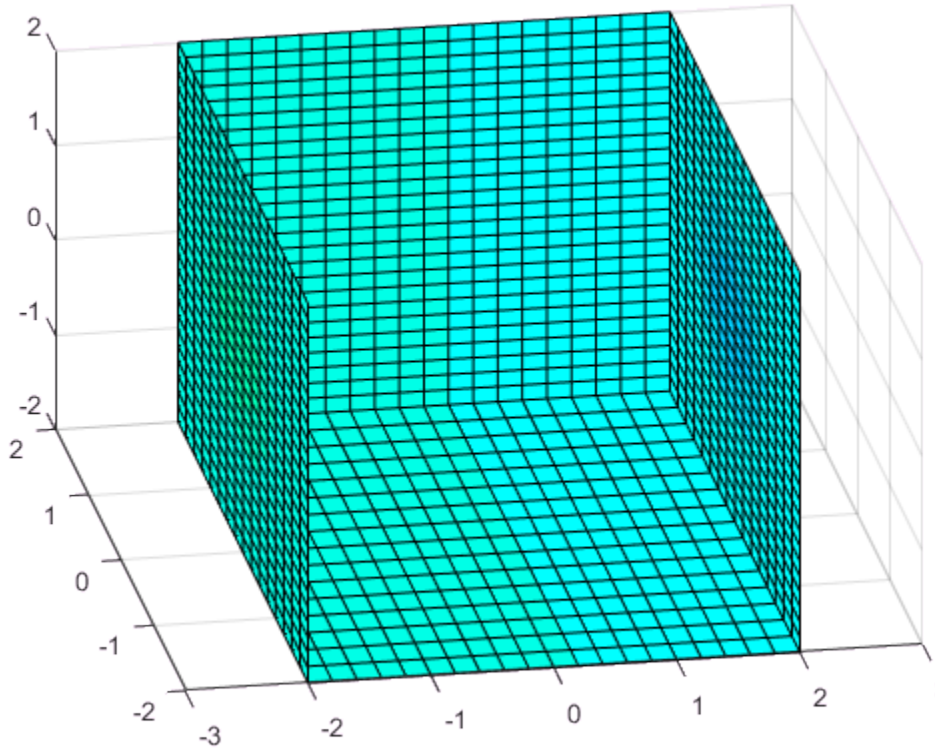

Tips

The color drawn at each point is determined by interpolation into the volume `V`.

See Also

`interp3` | `meshgrid`

Topics

Exploring Volumes with Slice Planes

Introduced before R2006a

smooth3

Smooth 3-D data

Syntax

Description

`W = smooth3(V)` smooths the input data `V` and returns the smoothed data in `W`.

`W = smooth3(V,'filter')` *`filter`* determines the convolution kernel and can be one of these values:

- `'gaussian'`
- `'box'` (default)

`W = smooth3(V,'filter',size)` sets the size of the convolution kernel (default is `[3 3 3]`). If `size` is scalar, then `size` is interpreted as [`size`, `size`, `size`].

`W = smooth3(V,'filter',size,sd)` sets an attribute of the convolution kernel. When *`filter`* is `gaussian`, `sd` is the standard deviation (default is .65).

Examples

Smooth Isosurface Data

Create a 10-by-10-by-10 array of random data and smooth it.

```
data = rand(10,10,10);
data = smooth3(data,'box',5);
```

Display the data as an isosurface with end caps.

```
patch(isocaps(data,.5),...
   'FaceColor','interp','EdgeColor','none');
p1 = patch(isosurface(data,.5),...
   'FaceColor','blue','EdgeColor','none');
isonormals(data,p1);
```

```
view(3);
axis vis3d tight
camlight left
colormap('jet');
lighting gouraud
```

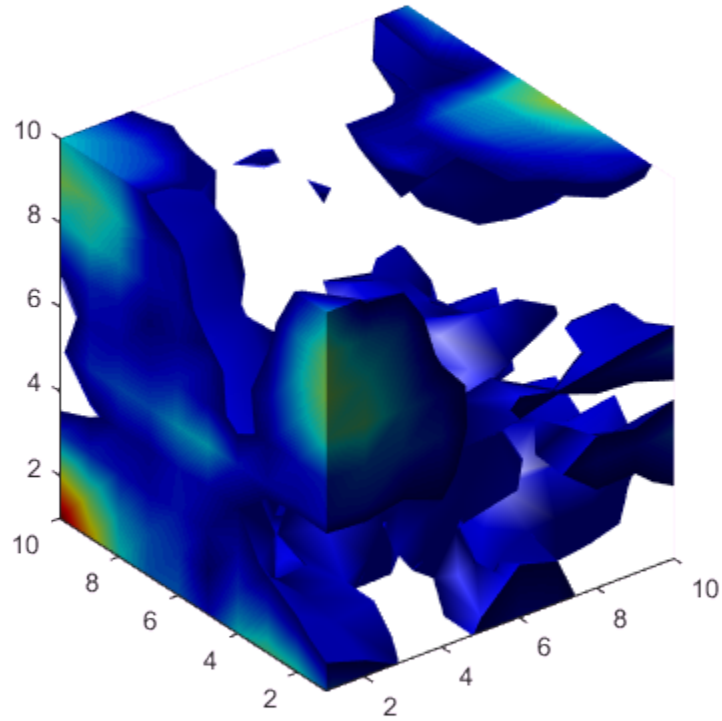

See Also

isocaps | isonormals | isosurface | patch

Topics

Displaying an Isosurface

Introduced before R2006a

smoothdata

Smooth noisy data

Syntax

```
B = smoothdata(A)
B = smoothdata(A,dim)

B = smoothdata(___,method)
B = smoothdata(___,method,window)

B = smoothdata(___,nanflag)

B = smoothdata(___,Name,Value)

[B,window] = smoothdata(___)
```

Description

`B = smoothdata(A)` returns a moving average of the elements of a vector using a fixed window length that is determined heuristically. The window slides down the length of the vector, computing an average over the elements within each window.

- If `A` is a matrix, then `smoothdata` computes the moving average down each column.
- If `A` is a multidimensional array, then `smoothdata` operates along the first dimension whose size does not equal 1.
- If `A` is a table or timetable with numeric variables, then `smoothdata` operates on each variable separately.

`B = smoothdata(A,dim)` operates along the dimension `dim` of `A`. For example, if `A` is a matrix, then `smoothdata(A,2)` smooths the data in each row of `A`.

`B = smoothdata(___,method)` specifies the smoothing method for either of the previous syntaxes. For example, `B = smoothdata(A,'sgolay')` uses a Savitzky-Golay filter to smooth the data in `A`.

`B = smoothdata(___,method,window)` specifies the length of the window used by the smoothing method. For example, `smoothdata(A,'movmedian',5)` smooths the data in `A` by taking the median over a five-element sliding window.

`B = smoothdata(___,nanflag)` specifies how `NaN` values are treated for any of the previous syntaxes. `'omitnan'` ignores `NaN` values and `'includenan'` includes them when computing within each window.

`B = smoothdata(___,Name,Value)` specifies additional parameters for smoothing using one or more name-value pair arguments. For example, if `t` is a vector of time values, then `smoothdata(A,'SamplePoints',t)` smooths the data in `A` relative to the times in `t`.

`[B,window] = smoothdata(___)` also returns the moving window length.

Examples

Smooth Data with Moving Average

Create a vector containing noisy data, and smooth the data with a moving average. Plot the original and smoothed data.

```
x = 1:100;
A = cos(2*pi*0.05*x+2*pi*rand) + 0.5*randn(1,100);
B = smoothdata(A);
plot(x,A,'-o',x,B,'-x')
legend('Original Data','Smoothed Data')
```

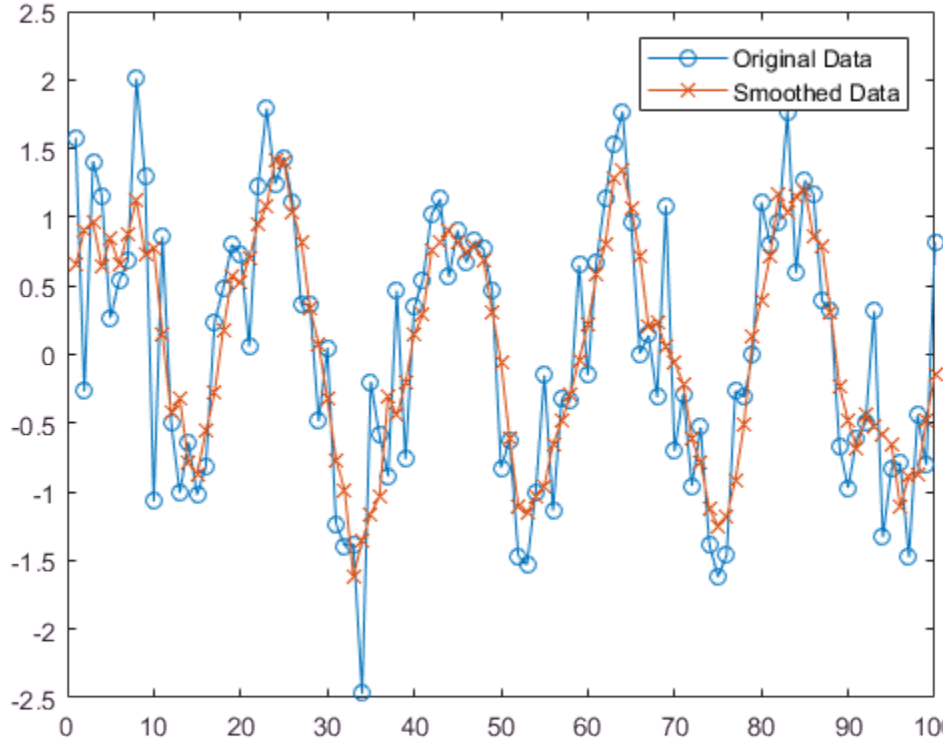

Matrix of Noisy Data

Create a matrix whose rows represent three noisy signals. Smooth the three signals using a moving average, and plot the smoothed data.

```
x = 1:100;
s1 = cos(2*pi*0.03*x+2*pi*rand) + 0.5*randn(1,100);
s2 = cos(2*pi*0.04*x+2*pi*rand) + 0.4*randn(1,100) + 5;
s3 = cos(2*pi*0.05*x+2*pi*rand) + 0.3*randn(1,100) - 5;
A = [s1; s2; s3];
B = smoothdata(A,2);
plot(x,B(1,:),x,B(2,:),x,B(3,:))
```

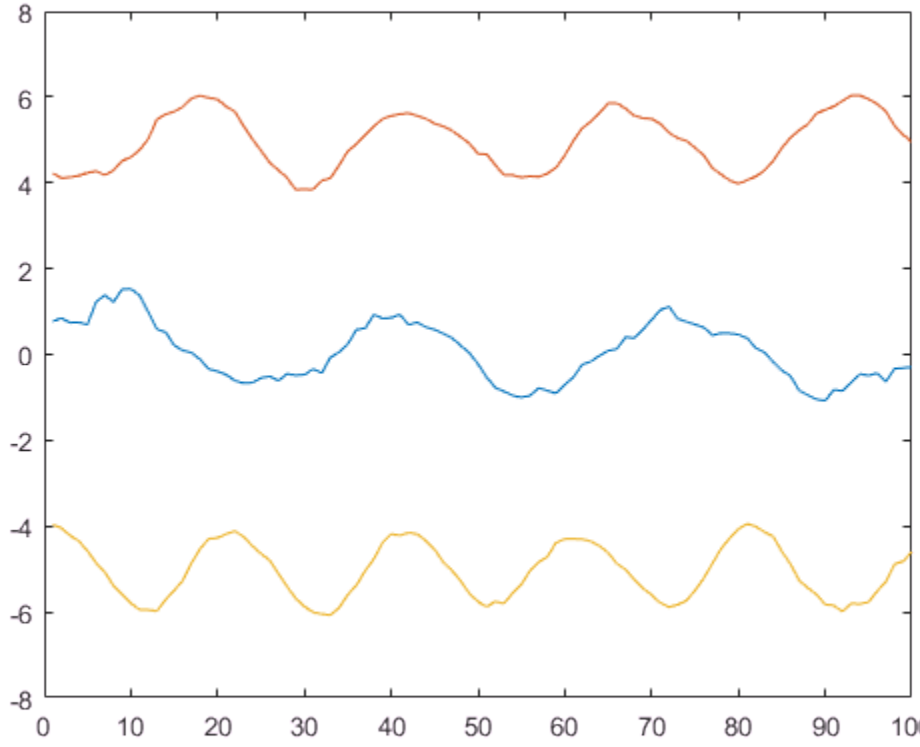

Gaussian Filter

Smooth a vector of noisy data with a Gaussian-weighted moving average filter. Display the window length used by the filter.

```
x = 1:100;
A = cos(2*pi*0.05*x+2*pi*rand) + 0.5*randn(1,100);
[B, window] = smoothdata(A,'gaussian');
window
```

```
window = 4
```

Smooth the orginal data with a larger window of length 20. Plot the smoothed data for both window lengths.

```
C = smoothdata(A,'gaussian',20);
plot(x,B,'-o',x,C,'-x')
legend('Small Window','Large Window')
```

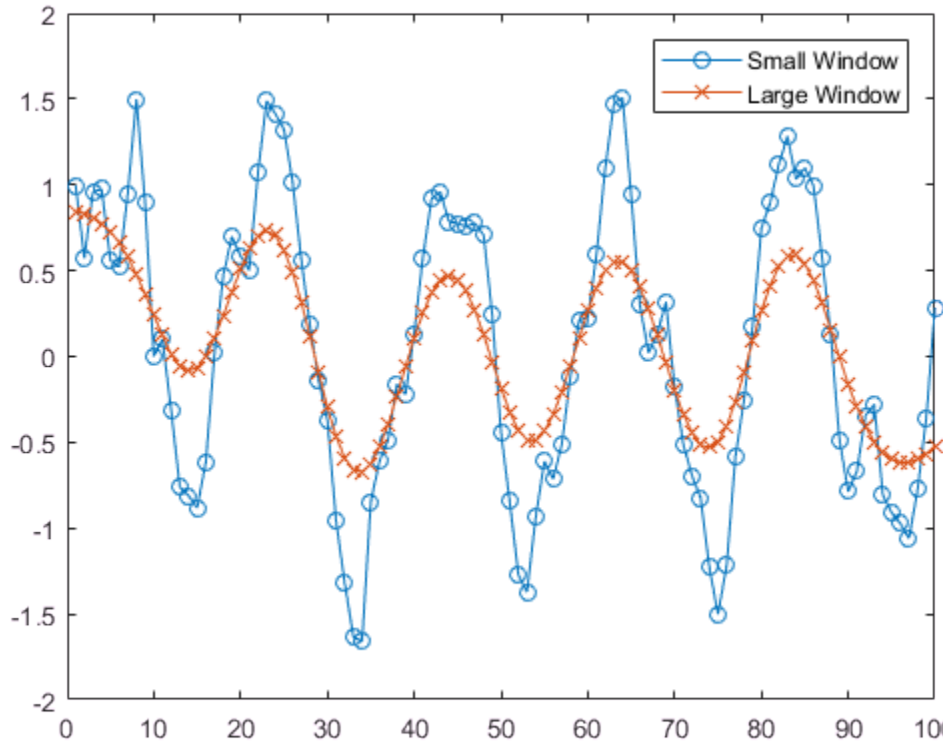

Vector with NaN

Create a noisy vector containing NaN values, and smooth the data ignoring NaN, which is the default.

```
A = [NaN randn(1,48) NaN randn(1,49) NaN];
B = smoothdata(A);
```

Smooth the data including NaN values. The average in a window containing NaN is NaN.

```
C = smoothdata(A,'includenan');
```

Plot the smoothed data in B and C.

```
plot(1:100,B,'-o',1:100,C,'-x')
legend('Ignore NaN','Include NaN')
```

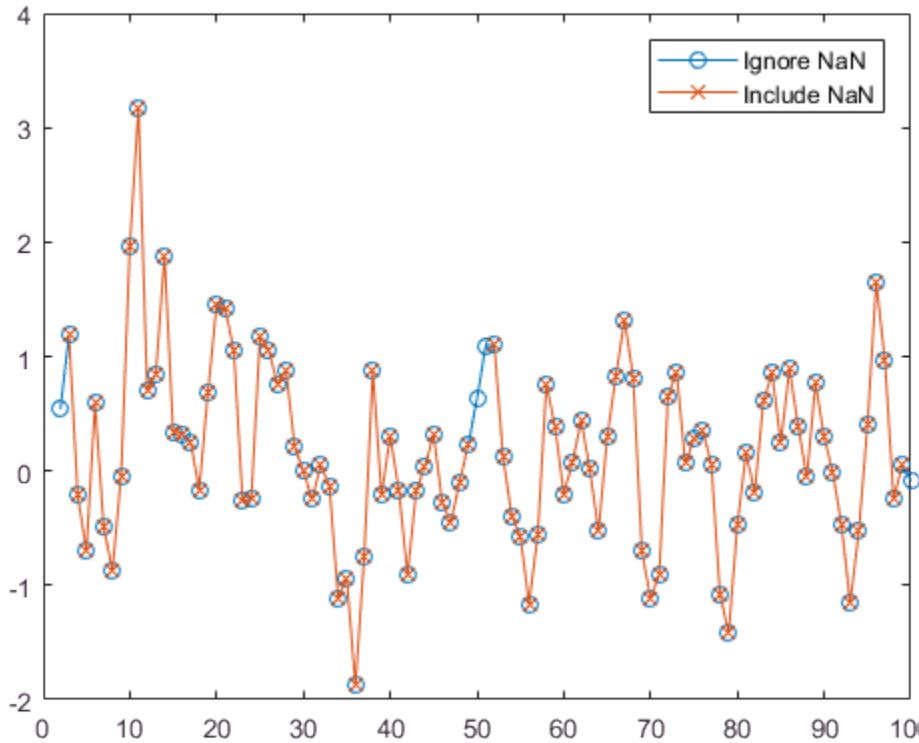

Smooth Data with Sample Points

Create a vector of noisy data that corresponds to a time vector t. Smooth the data relative to the times in t, and plot the original data and the smoothed data.

```
x = 1:100;
A = cos(2*pi*0.05*x+2*pi*rand) + 0.5*randn(1,100);
```

```
t = datetime(2017,1,1,0,0,0) + hours(0:99);
B = smoothdata(A,'SamplePoints',t);
plot(t,A,'-o',t,B,'-x')
legend('Original Data','Smoothed Data')
```

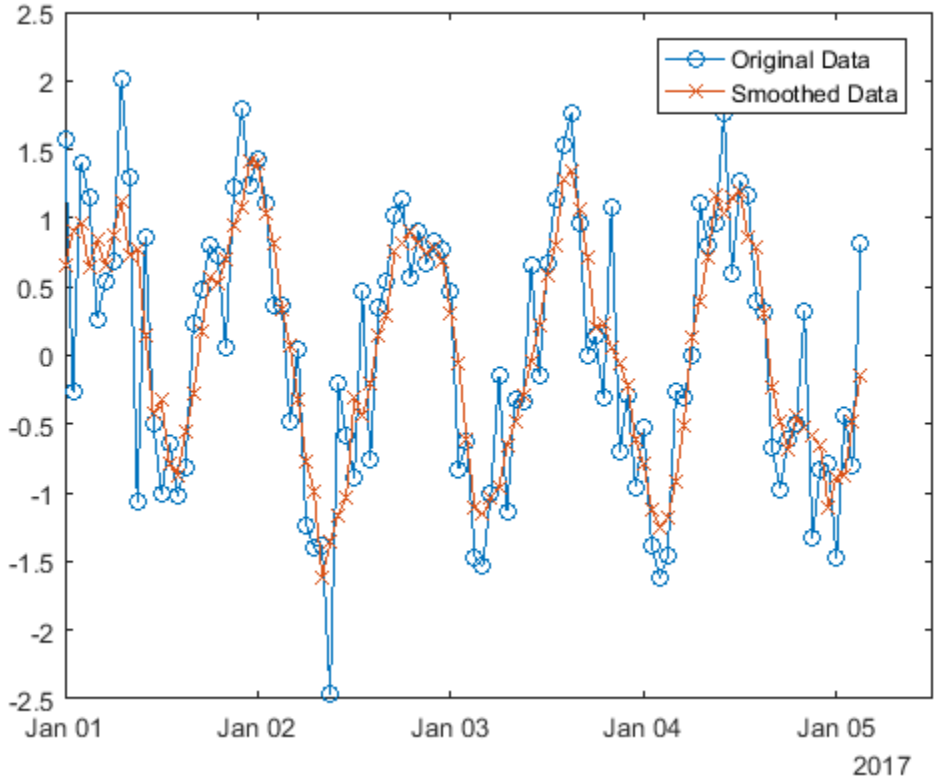

Input Arguments

A — Input array

vector | matrix | multidimensional array | table | timetable

Input array, specified as a vector, matrix, multidimensional array, table, or timetable. If A is a table or timetable, then either the variables must be numeric, or you must use

the `'DataVariables'` name-value pair to list numeric variables explicitly. Specifying variables is useful when you are working with a table that also contains non-numeric variables.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `table` | `timetable`
Complex Number Support: Yes

`dim` — Dimension to operate along
positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a matrix `A`.

`B = smoothdata(A,1)` smooths the data in each column of `A`.



`B = smoothdata(A,2)` smooths the data in each row of `A`.



When A is a table or timetable, dim is not supported. smoothdata operates along each table or timetable variable separately.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

method — Smoothing method

'movmean' (default) | 'movmedian' | 'gaussian' | 'lowess' | 'loess' | 'rlowess' | 'rloess' | 'sgolay'

Smoothing method, specified as one of the following:

- 'movmean' — Moving average over each window of A. This method is useful for reducing periodic trends in data.
- 'movmedian' — Moving median over each window of A. This method is useful for reducing periodic trends in data when outliers are present.
- 'gaussian' — Gaussian-weighted moving average over each window of A.
- 'lowess' — Linear regression over each window of A. This method can be computationally expensive, but results in fewer discontinuities.
- 'loess' — Quadratic regression over each window of A. This method is slightly more computationally expensive than 'lowess'.
- 'rlowess' — Robust linear regression over each window of A. This method is a more computationally expensive version of the method 'lowess', but it is more robust to outliers.
- 'rloess' — Robust quadratic regression over each window of A. This method is a more computationally expensive version of the method 'loess', but it is more robust to outliers.
- 'sgolay' — Savitzky-Golay filter, which smooths according to a quadratic polynomial that is fitted over each window of A. This method can be more effective than other methods when the data varies rapidly.

window — Window length

positive integer scalar | two-element vector of positive integers | positive duration scalar | two-element vector of positive durations

Window length, specified as a positive integer scalar, a two-element vector of positive integers, a positive duration scalar, or a two-element vector of positive durations.

When window is a positive integer scalar, then the window is centered about the current element and contains window-1 neighboring elements. If window is even, then the

window is centered about the current and previous elements. If `window` is a two-element vector of positive integers `[b f]`, then the window contains the current element, `b` elements backward, and `f` elements forward.

When `A` is a timetable or when `'SamplePoints'` is specified as a `datetime` or `duration` vector, `window` must be of type `duration`, and the window is computed relative to the sample points.

When the window length is also specified as an output argument, the output value matches the input value.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

`nanflag` — `NaN` condition
`'omitnan'` (default) | `'includenan'`

`NaN` condition, specified as one of the following values:

- `'omitnan'` — Ignore `NaN` values in the input. If a window contains all `NaN` values, then `smoothdata` returns `NaN`.
- `'includenan'` — Include `NaN` values when computing within each window, resulting in `NaN`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `smoothdata(A,'SmoothingFactor',0.5)`

`'SmoothingFactor'` — Window size factor
scalar ranging from 0 to 1

Window size factor, specified as the comma-separated pair consisting of `'SmoothingFactor'` and a scalar ranging from 0 to 1. The value of `'SmoothingFactor'` adjusts the level of smoothing by scaling the heuristic window size. Values near 0 produce smaller moving window lengths, resulting in less smoothing. Values near 1 produce larger moving window lengths, resulting in more smoothing.

`'SmoothingFactor'` is 0.25 by default and can only be specified when `window` is not specified.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'SamplePoints'` — Sample points

vector

Sample points, specified as the comma-separated pair consisting of `'SamplePoints'` and a vector. The sample points represent the location of the data in `A`. Sample points do not need to be uniformly sampled. By default, the sample points vector is `[1 2 3 ...]`.

Moving windows are defined relative to the sample points, which must be sorted and contain unique elements. For example, if `t` is a vector of times corresponding to the input data, then `smoothdata(rand(1,10),3,'SamplePoints',t)` has a window that represents the time interval between `t(i)-1.5` and `t(i)+1.5`.

When the sample points vector has data type `datetime` or `duration`, then the moving window length must have type `duration`.

If the sample points are nonuniformly spaced and the `'Endpoints'` name-value pair is specified, then its value must be `'shrink'`.

This name-value pair is not supported when the input data is a timetable.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `datetime` | `duration`

`'DataVariables'` — Table variables

variable name | cell array of variable names | numeric vector | logical vector | function handle

Table variables, specified as the comma-separated pair consisting of `'DataVariables'` and a variable name, a cell array of variable names, a numeric vector, a logical vector, or a function handle. The `'DataVariables'` value indicates which columns of the input table to detect outliers in, and can be one of the following:

- A character vector specifying a single table variable name
- A cell array of character vectors where each element is a table variable name
- A vector of table variable indices

- A logical vector whose elements each correspond to a table variable, where `true` includes the corresponding variable and `false` excludes it
- A function handle that takes the table as input and returns a logical scalar

Example: `'Age'`

Example: `{'Height','Weight'}`

Example: `@isnumeric`

Data Types: `char` | `cell` | `double` | `single` | `logical` | `function_handle`

`'Degree'` — Savitzky-Golay degree

nonnegative integer

Savitzky-Golay degree, specified as the comma-separated pair consisting of `'Degree'` and a nonnegative integer. This name-value pair can only be specified when `'sgolay'` is the specified smoothing method. The value of `'Degree'` corresponds to the degree of the polynomial in the Savitzky-Golay filter that fits the data within each window, which is 2 by default.

The value of `'Degree'` must be less than the window length for uniform sample points. For nonuniform sample points, the value must be less than the maximum number of points in any window.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`B` — Output array

vector | matrix | multidimensional array

Output array, returned as a vector, matrix, or multidimensional array. `B` is the same size and type as `A`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `table` | `timetable`

`window` — Window length

positive integer scalar | two-element vector of positive integers | positive duration scalar | two-element vector of positive durations

Window length, returned as a positive integer scalar, a two-element vector of positive integers, a positive duration scalar, or a two-element vector of positive durations.

When `window` is specified as an input argument, the output value matches the input value. When `window` is not specified as an input argument, then its value is the scalar heuristically determined by `smoothdata` based on the input data.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `duration`

Algorithms

When the window size for the smoothing method is not specified, `smoothdata` computes a default window size based on a heuristic. For a smoothing factor τ, the heuristic estimates a moving average window size that attenuates approximately $100*\tau$ percent of the energy of the input data.

See Also

See Also

`fillmissing` | `filter` | `movmad` | `movmean` | `movmedian`

Introduced in R2017a

snapnow

Force snapshot of image for inclusion in published document

Syntax

```
snapnow
```

Description

The `snapnow` command forces a snapshot of the image or plot that the code has most recently generated for presentation in a published document. The output appears in the published document at the end of the cell that contains the `snapnow` command. When used outside the context of publishing a file, `snapnow` has the same behavior as `drawnow`. That is, if you run a file that contains the `snapnow` command, the MATLAB software interprets it as though it were a `drawnow` command.

Examples

This example demonstrates the difference between publishing code that contains the `snapnow` command and running that code. The first image shows the results of publishing the code and the second image shows the results of running the code.

Suppose you have a file that contains the following code:

```
%% Scale magic Data and
%% Display as Image:

for i=1:3
    imagesc(magic(i))
    snapnow
end
```

When you publish the code to HTML, the published document contains a title, a table of contents, the commented text, the code, and each of the three images produced by the `for` loop. (In the published document shown, the size of the images have been reduced.)

Scale magic Data and

Contents

- Display as Image:

Display as Image:

```
for i=1:3
    imagesc(magic(i))
    snapnow
end
```

When you run the code, a single Figure window opens and MATLAB updates the image within this window as it evaluates each iteration of the `for` loop. Each successive image replaces the one that preceded it, so that the Figure window appears as follows when the code evaluation completes.

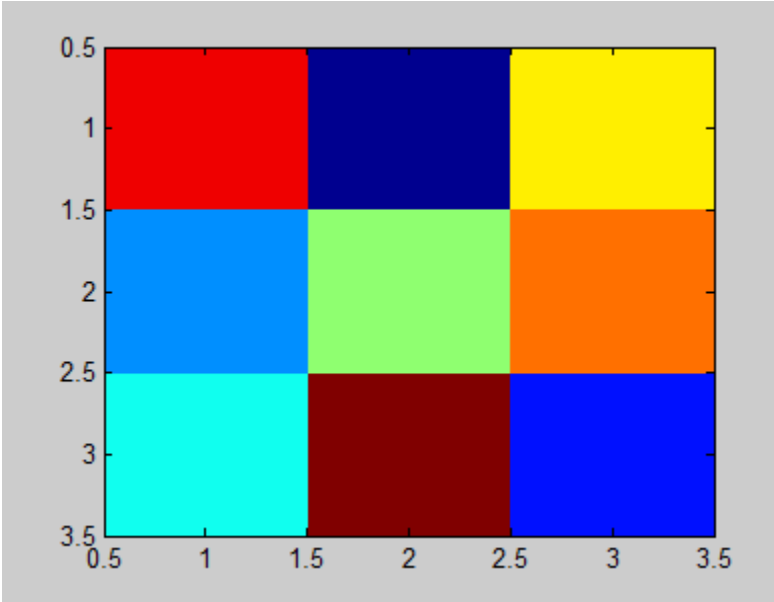

See Also

See Also

`drawnow`

Topics

"Image Snapshot"

Introduced in R2008b

sort

Sort array elements

Syntax

```
B = sort(A)
B = sort(A,dim)
B = sort( ___ ,direction)
B = sort( ___ ,Name,Value)
[B,I] = sort( ___ )
```

Description

`B = sort(A)` sorts the elements of `A` in ascending order.

- If `A` is a vector, then `sort(A)` sorts the vector elements.
- If `A` is a matrix, then `sort(A)` treats the columns of `A` as vectors and sorts each column.
- If `A` is a multidimensional array, then `sort(A)` operates along the first array dimension whose size does not equal 1, treating the elements as vectors.

`B = sort(A,dim)` returns the sorted elements of `A` along dimension `dim`. For example, if `A` is a matrix, then `sort(A,2)` sorts the elements of each row.

`B = sort( ___ ,direction)` returns sorted elements of `A` in the order specified by `direction` using any of the previous syntaxes. `'ascend'` indicates ascending order (the default) and `'descend'` indicates descending order.

`B = sort( ___ ,Name,Value)` specifies additional parameters for sorting. For example, `sort(A,'ComparisonMethod','abs')` sorts the elements of `A` by magnitude.

`[B,I] = sort( ___ )` also returns a collection of index vectors for any of the previous syntaxes. `I` is the same size as `A` and describes the arrangement of the elements of `A` into `B` along the sorted dimension. For example, if `A` is a vector, then `B = A(I)`.

Examples

Sort Vector in Ascending Order

Create a row vector and sort its elements in ascending order.

```
A = [9 0 -7 5 3 8 -10 4 2];
B = sort(A)
```

```
B =

   -10    -7     0     2     3     4     5     8     9
```

Sort Matrix Rows in Ascending Order

Create a matrix and sort each of its rows in ascending order.

```
A = [3 6 5; 7 -2 4; 1 0 -9]
```

```
A =

     3     6     5
     7    -2     4
     1     0    -9
```

```
B = sort(A,2)
```

```
B =

     3     5     6
    -2     4     7
    -9     0     1
```

Sort Matrix Columns in Descending Order

Create a matrix and sort its columns in descending order.

```
A = [10 -12 4 8; 6 -9 8 0; 2 3 11 -2; 1 1 9 3]
```

```
A =

    10   -12     4     8
     6    -9     8     0
     2     3    11    -2
     1     1     9     3
```

```
B = sort(A,'descend')
```

```
B =

    10     3    11     8
     6     1     9     3
     2    -9     8     0
     1   -12     4    -2
```

Sort String Array

Starting in R2016b, you can create string arrays using the `string` function, and sort them using the `sort` function. Sort strings in each column of a string array according to Unicode® dictionary order.

```
A = string({'Smith','Burns';...
    'Jones','Matthews';...
    'Peterson','Adams'});
B = sort(A)
```

```
B = 3×2 string array
    "Jones"        "Adams"
    "Peterson"     "Burns"
    "Smith"        "Matthews"
```

Sort the strings in each row.

```
B = sort(A,2)
```

```
B = 3×2 string array
    "Burns"    "Smith"
    "Jones"    "Matthews"
    "Adams"    "Peterson"
```

Text processing functions (such as `strfind` and `regexp`) accept string arrays as inputs, but other functions (for example, `addpath`) do not.

Sort and Index `datetime` Array

Create an array of `datetime` values and sort them in ascending order, that is, from the earliest to the latest calendar date.

```
ds = {'2012-12-22';'2063-04-05';'1992-01-12'};
A = datetime(ds,'Format','yyyy-MM-dd')
```

```
A = 3×1 datetime array
   2012-12-22
   2063-04-05
   1992-01-12
```

```
[B,I] = sort(A)
```

```
B = 3×1 datetime array
   1992-01-12
   2012-12-22
   2063-04-05


I =

     3
     1
     2
```

`B` lists the sorted dates and `I` contains the corresponding indices of `A`.

Access the sorted elements from the original array directly by using the index array `I`.

```
A(I)
```

```
ans = 3×1 datetime array
   1992-01-12
   2012-12-22
   2063-04-05
```

Sort 3-D Array

Create a 2-by-2-by-2 array and sort its elements in ascending order along the third dimension.

```
A(:,:,1) = [2 3; 1 6];
A(:,:,2) = [-1 9; 0 12];
A
```

```
A =

(:,:,1) =

     2     3
     1     6


(:,:,2) =

    -1     9
     0    12
```

```
B = sort(A,3)
```

```
B =

(:,:,1) =

    -1     3
     0     6


(:,:,2) =

     2     9
     1    12
```

Use `A(:)`, the column representation of `A`, to sort all of the elements of `A`.

```
B = sort(A(:))
```

```
B =
```

```
    -1
     0
     1
     2
     3
     6
     9
    12
```

Complex Vector

Sort the elements of a complex vector by their real parts. For elements with equal real parts, `sort` breaks the tie based on their imaginary parts.

```
A = [1+2i 3+i i 0 -i];
B = sort(A,'ComparisonMethod','real')
```

```
B =
   0.0000 - 1.0000i   0.0000 + 0.0000i   0.0000 + 1.0000i   1.0000 + 2.0000i   3.0000 -
```

Input Arguments

A — Input array

vector | matrix | multidimensional array | cell array of character vectors

Input array, specified as a vector, matrix, multidimensional array, or cell array of character vectors.

- If `A` is a scalar, then `sort(A)` returns `A`.
- If `A` contains missing values, such as `NaN`, `NaT`, `<undefined>`, and `missing`, then `sort` places them at the end.
- If `A` is complex, then by default, `sort` sorts the elements by magnitude. If more than one element has equal magnitude, then the elements are sorted by phase angle on the interval $(-\pi, \pi]$.
- If `A` is a cell array of character vectors or a string array, then `sort(A)` sorts the elements according to the code order for the UTF-16 character encoding scheme. The

sort is case-sensitive. For more information on sorting character and string arrays, see “Sort Order for Character and String Arrays” on page 1-10595.

- If `A` is a string array, then `sort` reorders the elements of the array, but does not reorder characters within the strings.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

`dim` — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

- Consider a matrix `A`. `sort(A,1)` sorts the elements in the columns of `A`.



sort(A,1)

- `sort(A,2)` sorts the elements in the rows of `A`.



sort(A,2)

`sort` returns `A` if `dim` is greater than `ndims(A)`. `dim` is not supported when `A` is a cell array, that is, `sort` only operates along the first array dimension whose size does not equal 1.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`direction` — Sorting direction
`'ascend'` (default) | `'descend'`

Sorting direction, specified as `'ascend'` or `'descend'`. `direction` is not supported when `A` is a cell array, that is, `sort` only sorts in ascending order.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `sort(A,'MissingPlacement','last')`

`'MissingPlacement'` — Placement of missing values
`'auto'` (default) | `'first'` | `'last'`

Placement of missing values (`NaN`, `NaT`, `<undefined>`, and `missing`) specified as the comma-separated pair consisting of `'MissingPlacement'` and one of the following:

- `'auto'` — Missing elements are placed last for ascending order and first for descending order.
- `'first'` — Missing elements are placed first.
- `'last'` — Missing elements are placed last.

`'ComparisonMethod'` — Element comparison method
`'auto'` (default) | `'real'` | `'abs'`

Element comparison method, specified as the comma-separated pair consisting of `'ComparisonMethod'` and one of the following:

- `'auto'` — Sort `A` by `real(A)` when `A` is real, and sort by `abs(A)` when `A` is complex.
- `'real'` — Sort `A` by `real(A)` when `A` is real or complex. If `A` has elements with equal real parts, then use `imag(A)` to break ties.
- `'abs'` — Sort `A` by `abs(A)` when `A` is real or complex. If `A` has elements with equal magnitude, then use `angle(A)` in the interval (-π,π] to break ties.

Output Arguments

B — Sorted array

vector | matrix | multidimensional array | cell array of character vectors

Sorted array, returned as a vector, matrix, multidimensional array, or cell array of character vectors. B is the same size and type as A. The order of the elements in B preserves the order of any equal elements in A.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | string | cell | categorical | datetime | duration

I — Sort index

vector | matrix | multidimensional array

Sort index, returned as a vector, matrix, or multidimensional array. I is the same size as A. The index vectors are oriented along the same dimension that sort operates on. For example, if A is a 2-by-3 matrix, then [B,I] = sort(A,2) sorts the elements in each row of A. The output I is a collection of 1-by-3 row index vectors describing the rearrangement of each row of A.

Definitions

Sort Order for Character and String Arrays

MATLAB stores characters as Unicode using the UTF-16 character encoding scheme. Character and string arrays are sorted according to the UTF-16 code point order. For the characters that are also the ASCII characters, this order means that uppercase letters come before lowercase letters. Digits and some punctuation also come before letters.

Tips

- The sortrows function provides additional flexibility for subsorting over multiple columns of matrix or table inputs.
- The sort function and the relational operators use different orderings for complex numbers. For more information, see “Relational Operations”.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- Multiple outputs are not supported.
- You must specify the dimension to sort, as in `sort(X,dim)`.
- Sorting the tall dimension, as in `sort(X,1)`, is only supported for column vectors.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The first argument cannot be a cell array.
- If the input is a complex type, then `sort` orders the output according to absolute value. When `x` is a complex type that has all zero imaginary parts, use `sort(real(x))` to compute the sort order for real types. See "Code Generation for Complex Data with Zero-Valued Imaginary Parts" (MATLAB Coder).

See Also

See Also

`issorted` | `max` | `min` | `sortrows` | `unique`

Topics

"Shifting and Sorting Matrices"

Introduced before R2006a

sortrows

Sort rows of matrix or table

Syntax

```
B = sortrows(A)
B = sortrows(A,column)
B = sortrows( ___ ,direction)
B = sortrows( ___ ,Name,Value)
[B,index] = sortrows( ___ )
```

```
tblB = sortrows(tblA)
```

```
tblB = sortrows(tblA,'RowNames')
tblB = sortrows(tblA,rowDimName)
tblB = sortrows(tblA,vars)
tblB = sortrows( ___ ,direction)
tblB = sortrows( ___ ,Name,Value)
[tblB,index] = sortrows( ___ )
```

Description

`B = sortrows(A)` sorts the rows of a matrix in ascending order based on the elements in the first column. When the first column contains repeated elements, `sortrows` sorts according to the next column and repeats this behavior for succeeding equal values.

`B = sortrows(A,column)` sorts `A` based on the columns specified in the vector `column`. For example, `sortrows(A,4)` sorts the rows of `A` in ascending order based on the elements in the fourth column. `sortrows(A,[4 6])` first sorts the rows of `A` based on the elements in the fourth column, then based on the elements in the sixth column to break ties.

`B = sortrows( ___ ,direction)` sorts the rows of `A` in the order specified by `direction` for any of the previous syntaxes. `direction` can be `'ascend'` (default) for ascending order or `'descend'` for descending order. `direction` can also be a cell array whose elements are `'ascend'` and `'descend'`, where each element corresponds to a column that `sortrows` operates on. For example, `sortrows(A,[4 6],{'ascend'`

`'descend'})` sorts the rows of `A` in ascending order based on the fourth column, then in descending order based on the sixth column to break ties.

`B = sortrows( ___ ,Name,Value)` specifies additional parameters for sorting rows. For example, `sortrows(A,'ComparisonMethod','abs')` sorts the elements of `A` by magnitude.

`[B,index] = sortrows( ___ )` also returns an index vector that describes the rearrangement of rows such that `B = A(index,:)`.

`tblB = sortrows(tblA)` sorts the rows of a table in ascending order based on the values in the first variable. If elements in the first variable are repeated, then `sortrows` sorts by the elements in the second variable, and so on.

If `tblA` is a timetable, then `sortrows` sorts the rows of `tblA` in ascending order based on its row times. Row times of a timetable label the rows along the first dimension of the timetable.

`tblB = sortrows(tblA,'RowNames')` sorts a table based on its row names. Row names of a table label the rows along the first dimension of the table. If `tblA` does not have row names, that is, if `tblA.Properties.RowNames` is empty, then `sortrows` returns `tblA`.

This syntax is not supported when `tblA` is a timetable.

`tblB = sortrows(tblA,rowDimName)` sorts `tblA` by row labels `rowDimName` along the first dimension.

- If `tblA` is a table, then row labels are row names.
- If `tblA` is a timetable, then row labels are row times.

`tblB = sortrows(tblA,vars)` sorts a table by the elements in the variables specified by `vars`. For example, `sortrows(tblA,{'Var1','Var2'})` first sorts the rows of `tblA` based on the elements in `Var1`, then by the elements in `Var2`.

- If `tblA` is a table and it has row names, then `vars` can include the row names.
- If `tblA` is a timetable, then `vars` can include the row times.

`tblB = sortrows( ___ ,direction)` sorts `tblA` in the order specified by `direction` for any of the previous table syntaxes. `direction` can be `'ascend'` or `'descend'`, which is applied to all specified variables, row names, or row times that `sortrows` operates on. `direction` can also be a cell array whose elements are `'ascend'` and

`'descend'`, where each element corresponds to the specified variables, row names, or row times being sorted on.

`tblB = sortrows( ___ ,Name,Value)` specifies additional parameters for sorting rows of a table or timetable. For example, `sortrows(tblA,'Var1','MissingPlacement','first')` sorts based on the elements in `Var1`, ordering missing elements such as `NaN` at the beginning of the table.

`[tblB,index] = sortrows( ___ )` also returns an index vector such that `tblB = tblA(index,:)`.

Examples

Sort Rows of Matrix

Create a matrix and sort its rows in ascending order based on the elements in the first column. When the first column contains repeated elements, `sortrows` looks to the elements in the second column to break the tie. For repeated elements in the second column, `sortrows` looks to the third column, and so on.

```
A = floor(gallery('uniformdata',[6 7],0)*100);
A(1:4,1) = 95;  A(5:6,1) = 76;  A(2:4,2) = 7;  A(3,3) = 73
```

```
A =

    95    45    92    41    13     1    84
    95     7    73    89    20    74    52
    95     7    73     5    19    44    20
    95     7    40    35    60    93    67
    76    61    93    81    27    46    83
    76    79    91     0    19    41     1
```

```
B = sortrows(A)
```

```
B =

    76    61    93    81    27    46    83
    76    79    91     0    19    41     1
    95     7    40    35    60    93    67
    95     7    73     5    19    44    20
    95     7    73    89    20    74    52
    95    45    92    41    13     1    84
```

Sort the rows of A based on the values in the second column. When the specified column has repeated elements, the corresponding rows maintain their original order.

```
C = sortrows(A,2)
```

```
C =

    95     7    73    89    20    74    52
    95     7    73     5    19    44    20
    95     7    40    35    60    93    67
    95    45    92    41    13     1    84
    76    61    93    81    27    46    83
    76    79    91     0    19    41     1
```

Sort the rows of A based on the elements in the first column, and look to the seventh column to break any ties.

```
D = sortrows(A,[1 7])
```

```
D =

    76    79    91     0    19    41     1
    76    61    93    81    27    46    83
    95     7    73     5    19    44    20
    95     7    73    89    20    74    52
    95     7    40    35    60    93    67
    95    45    92    41    13     1    84
```

Sort the rows of A in descending order based on the elements in the fourth column, and display the output vector `index` to see how the rows were rearranged.

```
[E,index] = sortrows(A,4,'descend')
```

```
E =

    95     7    73    89    20    74    52
    76    61    93    81    27    46    83
    95    45    92    41    13     1    84
    95     7    40    35    60    93    67
    95     7    73     5    19    44    20
    76    79    91     0    19    41     1
```

```
index =

     2
     5
     1
     4
     3
     6
```

Complex Matrix

Create a matrix containing complex numbers, and sort the rows of the matrix in ascending order based on the elements in the first column. Since the magnitudes of `A(1,1)` and `A(3,1)` are equal, `sortrows` computes their angles to break the tie.

```
A = [1+2i 3+i i; 2+10i 6i 2+5i; 2+i 4 3+3i]
```

```
A =
   1.0000 + 2.0000i   3.0000 + 1.0000i   0.0000 + 1.0000i
   2.0000 +10.0000i   0.0000 + 6.0000i   2.0000 + 5.0000i
   2.0000 + 1.0000i   4.0000 + 0.0000i   3.0000 + 3.0000i
```

```
B = sortrows(A)
```

```
B =
   2.0000 + 1.0000i   4.0000 + 0.0000i   3.0000 + 3.0000i
   1.0000 + 2.0000i   3.0000 + 1.0000i   0.0000 + 1.0000i
   2.0000 +10.0000i   0.0000 + 6.0000i   2.0000 + 5.0000i
```

```
angle(A(1,1))
```

```
ans = 1.1071
```

```
angle(A(3,1))
```

```
ans = 0.4636
```

Use the `'real'` option to sort the rows of `A` by their real part. Since `A(2,1)` and `A(3,1)` have equal real parts, `sortrows` uses the imaginary part to break the tie.

```
C = sortrows(A,'ComparisonMethod','real')
```

```
C =
```

```
   1.0000 + 2.0000i   3.0000 + 1.0000i   0.0000 + 1.0000i
   2.0000 + 1.0000i   4.0000 + 0.0000i   3.0000 + 3.0000i
   2.0000 +10.0000i   0.0000 + 6.0000i   2.0000 + 5.0000i
```

```
imag(A(2,1))
```

```
ans = 10
```

```
imag(A(3,1))
```

```
ans = 1
```

Sort Rows of Cell Array

Create a 6-by-2 cell array of character vectors, and sort its rows. The result is an alphabetized list sorted by both country and name.

```
A = {'Germany' 'Lukas'; 'USA' 'William'; 'USA' 'Andrew'; ...
'Germany' 'Andreas'; 'USA' 'Olivia'; 'Germany' 'Julia'}
```

```
A = 6×2 cell array
    'Germany'    'Lukas'
    'USA'        'William'
    'USA'        'Andrew'
    'Germany'    'Andreas'
    'USA'        'Olivia'
    'Germany'    'Julia'
```

```
B = sortrows(A)
```

```
B = 6×2 cell array
    'Germany'    'Andreas'
    'Germany'    'Julia'
    'Germany'    'Lukas'
    'USA'        'Andrew'
    'USA'        'Olivia'
    'USA'        'William'
```

Sort the countries first, then sort the names in descending order.

```
C = sortrows(A,[1 2],{'ascend' 'descend'})
```

```
C = 6×2 cell array
    'Germany'    'Lukas'
```

```
    'Germany'    'Julia'
    'Germany'    'Andreas'
    'USA'        'William'
    'USA'        'Olivia'
    'USA'        'Andrew'
```

Sort Rows of Table

Sort the rows of a table by variable values.

Create a table with four variables listing patient information for five people.

```
LastName = {'Smith';'Johnson';'Williams';'Jones';'Brown'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];

tblA = table(Age,Height,Weight,BloodPressure,'RowNames',LastName)
```

```
tblA = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Smith       38     71        176       124      93
    Johnson     43     69        163       109      77
    Williams    38     64        131       125      83
    Jones       40     67        133       117      75
    Brown       49     64        119       122      80
```

Sort the rows of the table. The `sortrows` function sorts the rows in ascending order first by the variable `Age`, and then by the variable `Height` to break the tie between the two rows with equal ages.

```
tblB = sortrows(tblA)
```

```
tblB = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Williams    38     64        131       125      83
    Smith       38     71        176       124      93
    Jones       40     67        133       117      75
```

```
    Johnson      43      69         163        109      77
    Brown        49      64         119        122      80
```

Sort Rows of Table by Row Names

Create a table with four variables listing patient information for five people.

```
LastName = {'Smith';'Johnson';'Williams';'Jones';'Brown'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];

tblA = table(Age,Height,Weight,BloodPressure,'RowNames',LastName)
```

```
tblA = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Smith       38     71        176       124      93
    Johnson     43     69        163       109      77
    Williams    38     64        131       125      83
    Jones       40     67        133       117      75
    Brown       49     64        119       122      80
```

Sort the rows of the table in ascending order based on the row names, and return the index vector that describes how the rows were rearranged.

```
[tblB,index] = sortrows(tblA,'RowNames')
```

```
tblB = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Brown       49     64        119       122      80
    Johnson     43     69        163       109      77
    Jones       40     67        133       117      75
    Smith       38     71        176       124      93
    Williams    38     64        131       125      83


index =
```

```
     5
     2
     4
     1
     3
```

Sort Rows of Table by Variables

Create a table with four variables listing patient information for five people.

```
LastName = {'Sweet';'Jacobson';'Wang';'Joiner';'Berger'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];

tblA = table(Age,Height,Weight,BloodPressure,'RowNames',LastName)
```

```
tblA = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Sweet       38     71        176       124      93
    Jacobson    43     69        163       109      77
    Wang        38     64        131       125      83
    Joiner      40     67        133       117      75
    Berger      49     64        119       122      80
```

Sort the rows of the table in ascending order by `Height`, and then in descending order by `Weight`.

```
tblB = sortrows(tblA,{'Height','Weight'},{'ascend','descend'})
```

```
tblB = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Wang        38     64        131       125      83
    Berger      49     64        119       122      80
    Joiner      40     67        133       117      75
    Jacobson    43     69        163       109      77
    Sweet       38     71        176       124      93
```

Table with Missing Elements

Create a table with four variables listing patient information for five people. The `Weight` variable contains missing values.

```
LastName = {'Sweet';'Jacobson';'Wang';'Joiner';'Berger'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;NaN;131;133;NaN];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];
tblA = table(Age,Height,Weight,BloodPressure,'RowNames',LastName)
```

```
tblA = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Sweet       38     71        176       124      93
    Jacobson    43     69        NaN       109      77
    Wang        38     64        131       125      83
    Joiner      40     67        133       117      75
    Berger      49     64        NaN       122      80
```

Sort the rows of the table in ascending order by `Weight`, placing the rows containing `NaN` first.

```
tblB = sortrows(tblA,'Weight','MissingPlacement','first')
```

```
tblB = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Jacobson    43     69        NaN       109      77
    Berger      49     64        NaN       122      80
    Wang        38     64        131       125      83
    Joiner      40     67        133       117      75
    Sweet       38     71        176       124      93
```

Sort Rows of Timetable

Create a timetable, and sort the rows by row times.

```
TimeDuration = [hours(3) hours(2) hours(1) hours(5) hours(6)]';
TT = timetable(TimeDuration,[98;97.5;97.9;98.1;101],[120;111;119;117;118]);

B = sortrows(TT,'TimeDuration')
```

```
B = 5×2 timetable
    TimeDuration    Var1    Var2
    ____________    ____    ____

    1 hr            97.9    119
    2 hr            97.5    111
    3 hr              98    120
    5 hr            98.1    117
    6 hr             101    118
```

Input Arguments

A — Input array

column vector | matrix

Input array, specified as a column vector or matrix.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `categorical` | `datetime` | `duration`
Complex Number Support: Yes

`column` — Column sorting vector

nonzero integer scalar | vector of nonzero integers

Column sorting vector, specified as a nonzero integer scalar or a vector of nonzero integers. Each specified integer value indicates a column to sort by. Negative integers indicate that the sort order is descending.

`direction` — Sorting direction

character vector | cell array of character vectors

Sorting direction, specified as a character vector or cell array of character vectors containing `'ascend'` (default) or `'descend'`. If `direction` is a cell array of character vectors, then the number of entries must match the number of columns or variables being sorted on.

If the `column` argument and the `direction` argument are specified together, then `sortrows` sorts according to `direction`, ignoring the signs of the elements in `column`.

Data Types: `char` | `cell`

`tblA` — Input table

table | timetable

Input table, specified as a table or a timetable. Each variable in `tblA` must be a valid input to `sort` or `sortrows`.

Data Types: `table` | `timetable`

`rowDimName` — Name of first dimension of input table or timetable

character vector

Name of the first dimension of the input table or timetable, specified as a character vector.

- If `tblA` is a table with row names, then `rowDimName` is the name of the first dimension of the table. By default, the name of the first dimension is `'Row'`. Dimension names are a property of tables. You can access the dimension names of `tblA` using `tblA.Properties.DimensionNames`.
- If `tblA` is a timetable, then `rowDimName` is the name of the vector of row times. You can specify its name when you create a timetable, such as `Time` or `Date`. You can also access the dimension names using `tblA.Properties.DimensionNames`.

Example: If a table `T` has row names, and you changed the name of the first dimension using `T.Properties.DimensionName{1} = 'Name'`, then `sortrows(T,'Name')` sorts the table by row name.

Example: If a timetable `TT` has a time vector named `Date`, then `sortrows(TT,'Date')` sorts the timetable on the dates and times that `Date` contains.

Data Types: `char`

`vars` — Sorting variables

scalar integer | vector of integers | variable name | cell array of variable names | logical vector

Sorting variables, specified as a scalar integer, a vector of integers, a variable name, a cell array of variable names, or a logical vector. `vars` indicates the table variables to sort by.

If an element of `vars` is a positive integer, then `sortrows` sorts the corresponding variable in `tblA` in ascending order. If an element of `vars` is a negative integer, then `sortrows` sorts the corresponding variable in `tblA` in descending order.

Example: `sortrows(tblA,{'Height','Weight'})` sorts the rows of `tblA` in ascending order, first by the variable `Height`, then by the variable `Weight` to break ties.

Example: `sortrows(tblA,[1 4])` sorts by the first variable of `tblA` in ascending order, then sorts by the fourth variable to break ties.

Example: `sortrows(TT,{'Time','X'})` sorts the row times of timetable `TT` in ascending order first, then sorts by the table variable `'X'` to break ties.

Data Types: `double` | `single` | `char` | `cell` | `logical`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `sortrows(A,'MissingPlacement','last')`

`'MissingPlacement'` — Placement of missing values
`'auto'` (default) | `'first'` | `'last'`

Placement of missing values (`NaN`, `NaT`, `<undefined>`, and `missing`) specified as the comma-separated pair consisting of `'MissingPlacement'` and one of the following:

- `'auto'` — Missing elements are placed last for ascending order and first for descending order.
- `'first'` — Missing elements are placed first.
- `'last'` — Missing elements are placed last.

`'ComparisonMethod'` — Element comparison method
`'auto'` (default) | `'real'` | `'abs'`

Element comparison method, specified as the comma-separated pair consisting of `'ComparisonMethod'` and one of the following:

- `'auto'` — Sort rows of `A` by `real(A)` when `A` is real, and sort by `abs(A)` when `A` is complex.

- `'real'` — Sort rows of `A` by `real(A)` when `A` is real or complex. If a column of `A` has elements with equal real parts, then use `imag(A)` to break ties.
- `'abs'` — Sort rows of `A` by `abs(A)` when `A` is real or complex. If a column of `A` has elements with equal magnitude, then use `angle(A)` in the interval (-π,π] to break ties.

Output Arguments

`B` — Sorted array

vector | matrix | multidimensional array

Sorted array, returned as a vector, matrix, or multidimensional array. `B` is the same size as `A`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `categorical` | `datetime` | `duration`

`tblB` — Sorted table

table | timetable

Sorted table, returned as a table or timetable with the same variables as `tblA`.

Data Types: `table` | `timetable`

`index` — Sort index

index vector

Sort index, returned as an index vector. The sort index describes the rearrangement of the rows in the input such that `B = A(index,:)`.

Data Types: `double`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- For tall arrays, valid syntaxes are:
  - `Y = sortrows(X)`
  - `Y = sortrows(X,col)`
  - `Y = sortrows(X,direction)`
  - `Y = sortrows(___,Name,Value)`
- For tall tables and tall timetables, valid syntaxes are:
  - `Y = sortrows(T,vars)`
  - `Y = sortrows(T,vars,direction)`
- Multiple outputs are not supported.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays for the first argument.
- If the input is a complex type, `sortrows` orders the output according to absolute value. When `x` is a complex type that has all zero imaginary parts, use `sortrows(real(x))` to compute the sort order for real types. See "Code Generation for Complex Data with Zero-Valued Imaginary Parts" (MATLAB Coder).

See Also

See Also

`issorted` | `issortedrows` | `sort`

Introduced before R2006a

sound

Convert matrix of signal data to sound

Syntax

```
sound(y)
sound(y,Fs)
sound(y,Fs,nBits)
```

Description

`sound(y)` sends audio signal `y` to the speaker at the default sample rate of 8192 hertz.

`sound(y,Fs)` sends audio signal `y` to the speaker at sample rate `Fs`.

`sound(y,Fs,nBits)` uses `nBits` bits per sample for audio signal `y`.

Examples

Play Sample Data at Default Sample Rate

Load the example file `gong.mat`, which contains sample data `y` and rate `Fs`, and listen to the audio.

```
load gong.mat;
sound(y);
```

Play Sample Data at Specific Sample Rate

Play an excerpt from Handel's “Hallelujah Chorus” at twice the recorded sample rate.

```
load handel.mat;
sound(y, 2*Fs);
```

Play Sample Data with Specific Bit Depth

```
load handel.mat;
nBits = 16;
```

```
sound(y,Fs,nBits);
```

MATLAB® plays the audio with a bit depth of 16 bits per sample, if this is supported on your system.

Input Arguments

y — Audio data

column vector | m-by-2 matrix

Audio data, specified as an m-by-1 column vector for single-channel (mono) audio, or an m-by-2 matrix for stereo playback, where m is the number of audio samples. If y is an m-by-2 matrix, then the first column corresponds to the left channel, and the second column corresponds to the right channel. Stereo playback is available only if your system supports it.

Data Types: double

Fs — Sample rate

8192 (default) | positive number

Sample rate, in hertz, of audio data y, is specified as a positive number from 1000 through 384000. Valid values depend on both the sample rates permitted by MATLAB and the specific audio hardware on your system. MATLAB has a hard restriction of 1000 Hz <= Fs <= 384000 Hz, although further hardware-dependent restrictions apply.

Data Types: single | double

nBits — Bit depth of sample values

16 (default) | 8 | 24

Bit depth of the sample values, specified as an integer. Valid values depend on the audio hardware installed. Most platforms support bit depths of 8 bits or 16 bits.

Tips

- The sound function supports sound devices on all Windows and most UNIX platforms.
- Most sound cards support sample rates between 5 and 48 kilohertz. Specifying a sample rate outside this range might produce unexpected results.

See Also

See Also

`audioplayer` | `audioread` | `audiowrite` | `soundsc`

Topics

"Characteristics of Audio Files"
"Play Audio"

Introduced before R2006a

soundsc

Scale data and play as sound

Syntax

```
soundsc(y)
soundsc(y,Fs)
soundsc(y,Fs,nBits)

soundsc( ___ ,yRange)
```

Description

`soundsc(y)` scales the values of audio signal `y` to fit in the range from –1.0 to 1.0, and then sends the data to the speaker at the default sample rate of 8192 hertz. By first scaling the data, `soundsc` plays the audio as loudly as possible without clipping. The mean of the dynamic range of the data is set to zero.

`soundsc(y,Fs)` sends audio signal `y` to the speaker at sample rate `Fs`.

`soundsc(y,Fs,nBits)` uses `nBits` bits per sample for audio signal `y`.

`soundsc( ___ ,yRange)`, where `yRange` is a vector of the form `[low,high]`, linearly scales the values in `y` between `low` and `high` to the full sound range `[-1.0,1.0]`. Values outside `[low,high]` scale beyond `[-1.0,1.0]`. You can use `yRange` with any of the input arguments in the previous syntaxes.

Examples

Play Sample Data at Default Sample Rate

Load the example file `gong.mat`, which contains sample data `y` and rate `Fs`, and listen to the audio.

```
load gong.mat;
```

```
soundsc(y);
```

Play Sample Data at Specific Sample Rate

Play an excerpt from Handel's "Hallelujah Chorus" at twice the recorded sample rate.

```
load handel.mat;
soundsc(y, 2*Fs);
```

Play Sample Data with Specific Bit Depth

```
load handel.mat;
nBits = 16;
soundsc(y,Fs,nBits);
```

MATLAB® plays the scaled audio with a bit depth of 16 bits per sample.

Scale Selected Audio Data

```
load handel.mat;
yRange = [-0.7,0.7];
soundsc(y,yRange);
```

Input Arguments

y — Audio data

column vector | m-by-2 matrix

Audio data, specified as an m-by-1 column vector for single-channel (mono) audio, or an m-by-2 matrix for stereo playback, where m is the number of audio samples. If y is an m-by-2 matrix, then the first column corresponds to the left channel, and the second column corresponds to the right channel. Stereo playback is available only if your system supports it.

Data Types: double

Fs — Sample rate

8192 (default) | positive number

Sample rate, in hertz, of audio data y, is specified as a positive number from 1000 through 384000. Valid values depend on both the sample rates permitted by MATLAB and the specific audio hardware on your system. MATLAB has a hard restriction of 1000 Hz <= Fs <= 384000 Hz, although further hardware-dependent restrictions apply.

Data Types: `single` | `double`

`nBits` — Bit depth of sample values
16 (default) | 8 | 24

Bit depth of the sample values, specified as an integer. Valid values depend on the audio hardware installed. Most platforms support bit depths of 8 bits or 16 bits.

`yRange` — Range of audio data to scale
`[-max(abs(y)),max(abs(y))]` (default) | two-element vector

Range of audio data to scale, specified as a two-element vector of the form `[low,high]`, where `low` and `high` are the lower and upper limits of the range. Values in `y` that are scaled beyond `[-1.0, 1.0]` are clipped when played back on a sound device.

Example: `[-0.8,0.8]`

Data Types: `double`

Tips

- The `sound` function supports sound devices on all Windows and most UNIX platforms.
- Most sound cards support sample rates between 5 and 48 kilohertz. Specifying a sample rate outside this range might produce unexpected results.

See Also

See Also
`audioplayer` | `audioread` | `audiowrite` | `sound`

Introduced before R2006a

spalloc

Allocate space for sparse matrix

Syntax

```
S = spalloc(m,n,nz)
```

Description

`S = spalloc(m,n,nz)` creates an all zero sparse matrix `S` of size `m`-by-`n` with room to hold `nz` nonzeros, where `nz >= 1`. The matrix can then be generated column by column without requiring repeated storage allocation as the number of nonzeros grows.

`spalloc(m,n,nz)` is shorthand for

```
sparse([],[],[],m,n,nz)
```

Examples

To generate efficiently a sparse matrix that has an average of at most three nonzero elements per column

```
S = spalloc(n,n,3*n);
for j = 1:n
    S(:,j) = [zeros(n-3,1)' round(rand(3,1))']';
end
```

See Also

See Also

`nnz` | `nzmax` | `sparse`

Introduced before R2006a

sparse

Create sparse matrix

Syntax

```
S = sparse(A)

S = sparse(m,n)

S = sparse(i,j,v)
S = sparse(i,j,v,m,n)
S = sparse(i,j,v,m,n,nz)
```

Description

`S = sparse(A)` converts a full matrix into sparse form by squeezing out any zero elements. If a matrix contains many zeros, converting the matrix to sparse storage saves memory.

`S = sparse(m,n)` generates an `m`-by-`n` all zero sparse matrix.

`S = sparse(i,j,v)` generates a sparse matrix `S` from the triplets `i`, `j`, and `v` such that `S(i(k),j(k)) = v(k)`. The `max(i)`-by-`max(j)` output matrix has space allotted for `length(v)` nonzero elements. `sparse` adds together elements in `v` that have duplicate subscripts in `i` and `j`.

If the inputs `i`, `j`, and `v` are vectors or matrices, they must have the same number of elements. Alternatively, the argument `v` and/or one of the arguments `i` or `j` can be scalars.

`S = sparse(i,j,v,m,n)` specifies the size of `S` as `m`-by-`n`.

`S = sparse(i,j,v,m,n,nz)` allocates space for `nz` nonzero elements. Use this syntax to allocate extra space for nonzero values to be filled in after construction.

Examples

Untitled

Save Memory Using Sparse Storage

Create a 10,000-by-10,000 full storage identity matrix.

```
A = eye(10000);
whos A
```

```
  Name          Size                    Bytes  Class     Attributes

  A         10000x10000             800000000  double
```

This matrix uses 800-megabytes of memory.

Convert the matrix to sparse storage.

```
S = sparse(A);
whos S
```

```
  Name          Size                 Bytes  Class     Attributes

  S         10000x10000             240008  double    sparse
```

In sparse form, the same matrix uses roughly 0.25-megabytes of memory. In this case, you can avoid full storage completely by using the `speye` function, which creates sparse identity matrices directly.

Sparse Matrix of All Zeros

```
S = sparse(10000,5000)
```

```
S =
   All zero sparse: 10000×5000
```

Sparse Matrix of Nonzeros with Specified Size

Create a 1500-by-1500 sparse matrix from the triplets `i`, `j`, and `v`.

```
i = [900 1000];
j = [900 1000];
v = [10 100];
```

```
S = sparse(i,j,v,1500,1500)
```

```
S =
 (900,900)     10
(1000,1000)   100
```

When you specify a size larger than `max(i)` -by- `max(j)`, the `sparse` function pads the output with extra rows and columns of zeros.

```
size(S)
```

```
ans =

        1500        1500
```

Preallocate Storage in Sparse Matrix

Create a sparse matrix with 10 nonzero values, but which has space allocated for 100 nonzero values.

```
S = sparse(1:10,1:10,5,20,20,100);
N = nnz(S)
```

```
N = 10
```

```
N_alloc = nzmax(S)
```

```
N_alloc = 100
```

The `spalloc` function is a shorthand way to create a sparse matrix with *no* nonzero elements but which has space allotted for some number of nonzeros.

Accumulate Values into Sparse Matrix

Use repeated subscripts to accumulate values into a single sparse matrix that would otherwise require one or more loops.

Create a column vector of data and two column vectors of subscripts.

```
i = [6 6 6 5 10 10 9 9]';
j = [1 1 1 2 3 3 10 10]';
v = [100 202 173 305 410 550 323 121]';
```

Visualize the subscripts and values side-by-side.

```
[i,j,v]
```

```
ans =

     6     1   100
     6     1   202
     6     1   173
     5     2   305
    10     3   410
    10     3   550
     9    10   323
     9    10   121
```

Use the `sparse` function to accumulate the values that have identical subscripts.

```
S = sparse(i,j,v)
```

```
S =
   (6,1)       475
   (5,2)       305
  (10,3)       960
   (9,10)      444
```

Input Arguments

A — Input matrix

full matrix | sparse matrix

Input matrix, specified as a full or sparse matrix. If `A` is already sparse, then `sparse(A)` returns `A`.

Data Types: `double` | `logical`
Complex Number Support: Yes

i,j — Subscript pairs (as separate arguments)

scalars | vectors | matrices

Subscript pairs, specified as separate arguments of scalars, vectors, or matrices. Corresponding elements in `i` and `j` specify `S(i,j)` subscript pairs, which determine the

placement of the values in `v` into the output. If either `i` or `j` is a vector or matrix, then the other input can be a scalar or can be a vector or matrix with the same number of elements. In that case, `sparse` uses `i(:)` and `j(:)` as the subscripts. If `i` and `j` have identical values for several elements in `v`, then those elements are added together.

Note: If any value in `i` or `j` is larger than `2^31-1` for 32-bit platforms, or `2^48-1` on 64-bit platforms, then the sparse matrix cannot be constructed.

Data Types: `double` | `logical`

`v` — Values

scalar | vector | matrix

Values, specified as a scalar, vector, or matrix. If `v` is a vector or matrix, then one of the inputs `i` or `j` must also be a vector or matrix with the same number of elements.

Any elements in `v` that are zero are ignored, as are the corresponding subscripts in `i` and `j`. However, if you do not specify the dimension sizes of the output, `m` and `n`, then `sparse` calculates the maxima `m = max(i)` and `n = max(j)` before ignoring any zero elements in `v`.

Data Types: `double` | `logical`
Complex Number Support: Yes

`m,n` — Size of each dimension (as separate arguments)

integer values

Size of each dimension, specified as separate arguments of integer values. If you specify `m` (the row size), you also must specify `n` (the column size).

If you do not specify `m` and `n`, then `sparse` uses the default values `m = max(i)` and `n = max(j)`. These maxima are computed before any zeros in `v` are removed.

Data Types: `double`

`nz` — Storage allocation for nonzero elements

positive integer scalar

Storage allocation for nonzero elements, specified as a positive integer scalar. `nz` must be greater than or equal to `max([numel(i), numel(j), numel(v), 1])`.

For a sparse matrix, `S`, the `nnz` function returns the number of nonzero elements in the matrix, and the `nzmax` function returns the amount of storage allocated for nonzero matrix elements. If `nnz(S)` and `nzmax(S)` return different results, then more storage might be allocated than is actually required. For this reason, set `nz` only in anticipation of later fill-in.

If you do not specify `nz`, the `sparse` function uses a default value of `max([numel(i), numel(j), numel(v), 1])`.

Data Types: `double`

Tips

- MATLAB stores sparse matrices in compressed sparse column format. For more information, see John R. Gilbert, Cleve Moler, and Robert Schreiber's Sparse Matrices In MATLAB: Design and Implementation.
- The `accumarray` function has similar accumulation behavior to that of `sparse`.
  - `accumarray` groups data into bins using *n*-dimensional subscripts, but `sparse` groups data into bins using 2-D subscripts.
  - `accumarray` adds elements that have identical subscripts into the output by default, but can optionally apply any function to the bins. `sparse` only adds elements that have identical subscripts into the output.

See Also

See Also

`accumarray` | `diag` | `find` | `full` | `issparse` | `nnz` | `nonzeros` | `nzmax` | `spalloc` | `speye` | `spones` | `sprandn` | `sprandsym` | `spy`

Topics

"Constructing Sparse Matrices"
"Sparse Matrix Operations"
"Accessing Sparse Matrices"

Introduced before R2006a

spaugment

Form least squares augmented system

Syntax

```
S = spaugment(A,c)
S = spaugment(A)
```

Description

`S = spaugment(A,c)` creates the sparse, square, symmetric indefinite matrix `S = [c*I A; A' 0]`. The matrix `S` is related to the least squares problem

```
min norm(b - A*x)
```

by

```
r = b - A*x
S * [r/c; x] = [b; 0]
```

The optimum value of the residual scaling factor `c`, involves `min(svd(A))` and `norm(r)`, which are usually too expensive to compute.

`S = spaugment(A)` without a specified value of `c`, uses `max(max(abs(A)))/1000`.

Note In previous versions of MATLAB product, the augmented matrix was used by sparse linear equation solvers, \ and /, for nonsquare problems. Now, MATLAB software performs a least squares solve using the `qr` factorization of `A` instead.

See Also

`spparms`

Introduced before R2006a

spconvert

Import from sparse matrix external format

Syntax

```
S = spconvert(D)
```

Description

`S = spconvert(D)` constructs sparse matrix `S` from the columns of `D` in a manner similar to the `sparse` function.

- If `D` is of size `N`-by-`3`, then `spconvert` uses the columns `[i,j,re]` of `D` to construct `S`, such that `S(i(k), j(k)) = re(k)`.
- If `D` is of size `N`-by-`4`, then `spconvert` uses the columns `[i,j,re,im]` of `D` to construct `S`, such that `S(i(k), j(k)) = re(k) + 1i*im(k)`.

Examples

Convert Data File to Sparse Matrix

Create an ASCII file, `uphill.dat`, which contains the following values. Save the file in your current directory.

```
1     1     1.000000000000000
1     2     0.500000000000000
2     2     0.333333333333333
1     3     0.333333333333333
2     3     0.250000000000000
3     3     0.200000000000000
1     4     0.250000000000000
2     4     0.200000000000000
3     4     0.166666666666667
4     4     0.142857142857143
4     4     0.000000000000000
```

It is common to purposefully make the last line of the file include the desired size of the matrix with a value of 0. This practice ensures that the converted sparse matrix has that size.

Load the data into MATLAB and convert it into a sparse matrix.

```
load uphill.dat
H = spconvert(uphill)
```

```
H =

   (1,1)        1.0000
   (1,2)        0.5000
   (2,2)        0.3333
   (1,3)        0.3333
   (2,3)        0.2500
   (3,3)        0.2000
   (1,4)        0.2500
   (2,4)        0.2000
   (3,4)        0.1667
   (4,4)        0.1429
```

In this case, the last line in the file is not necessary because the earlier lines already specify that the matrix is at least 4-by-4.

Input Arguments

D — Input matrix

matrix

Input matrix, specified as a matrix with either three or four columns. In both cases, the first two columns of `D` are subscripts and the third column is composed of data values. A four column matrix specifies the real (third column) and imaginary (fourth column) parts of complex numbers.

If `D` is already a sparse matrix, then `spconvert` returns `D`.

Data Types: `single` | `double`

See Also

See Also

`full` | `sparse`

Introduced before R2006a

spdiags

Extract and create sparse band and diagonal matrices

Syntax

```
B = spdiags(A)
[B,d] = spdiags(A)
B = spdiags(A,d)
A = spdiags(B,d,A)
A = spdiags(B,d,m,n)
```

Description

The `spdiags` function generalizes the function `diag`. Four different operations, distinguished by the number of input arguments, are possible.

`B = spdiags(A)` extracts all nonzero diagonals from the `m`-by-`n` matrix `A`. `B` is a `min(m,n)`-by-`p` matrix whose columns are the `p` nonzero diagonals of `A`.

`[B,d] = spdiags(A)` returns a vector `d` of length `p`, whose integer components specify the diagonals in `A`.

`B = spdiags(A,d)` extracts the diagonals specified by `d`.

`A = spdiags(B,d,A)` replaces the diagonals specified by `d` with the columns of `B`. The output is sparse.

`A = spdiags(B,d,m,n)` creates an `m`-by-`n` sparse matrix by taking the columns of `B` and placing them along the diagonals specified by `d`.

Note In this syntax, if a column of `B` is longer than the diagonal it is replacing, and `m >= n`, `spdiags` takes elements of super-diagonals from the lower part of the column of `B`, and elements of sub-diagonals from the upper part of the column of `B`. However, if `m < n`, then super-diagonals are from the upper part of the column of `B`, and sub-diagonals from the lower part. (See “Example 5A” on page 1-10636 and “Example 5B” on page 1-10637, below).

Arguments

The `spdiags` function deals with three matrices, in various combinations, as both input and output.

A	An `m`-by-`n` matrix, usually (but not necessarily) sparse, with its nonzero or specified elements located on `p` diagonals.
B	A `min(m,n)`-by-`p` matrix, usually (but not necessarily) full, whose columns are the diagonals of `A`.
d	A vector of length `p` whose integer components specify the diagonals in `A`.

Roughly, `A`, `B`, and `d` are related by

```
for k = 1:p
    B(:,k) = diag(A,d(k))
end
```

Some elements of `B`, corresponding to positions outside of `A`, are not defined by these loops. They are not referenced when `B` is input and are set to zero when `B` is output.

How the Diagonals of A are Listed in the Vector d

An m-by-n matrix `A` has m+n-1diagonals. These are specified in the vector `d` using indices from -m+1 to n-1. For example, if `A` is 5-by-6, it has 10 diagonals, which are specified in the vector `d` using the indices -4, -3 , ... 4, 5. The following diagram illustrates this for a vector of all ones.

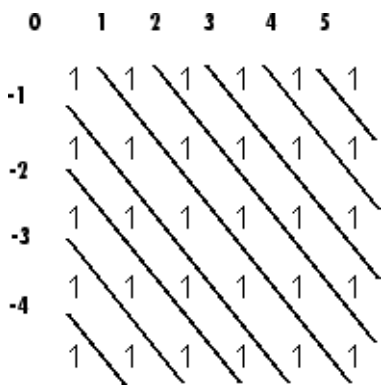

Examples

Example 1

For the following matrix,

```
A=[0 5 0 10 0 0;...
0 0 6 0 11 0;...
3 0 0 7 0 12;...
1 4 0 0 8 0;...
0 2 5 0 0 9]
```

```
A =

     0     5     0    10     0     0
     0     0     6     0    11     0
     3     0     0     7     0    12
     1     4     0     0     8     0
     0     2     5     0     0     9
```

the command

```
[B, d]  =spdiags(A)
```

returns

```
B =

     0     0     5    10
     0     0     6    11
     0     3     7    12
     1     4     8     0
     2     5     9     0


d =


    -3
    -2
     1
     3
```

The columns of the first output B contain the nonzero diagonals of A. The second output d lists the indices of the nonzero diagonals of A, as shown in the following diagram. See "How the Diagonals of A are Listed in the Vector d" on page 1-10631.

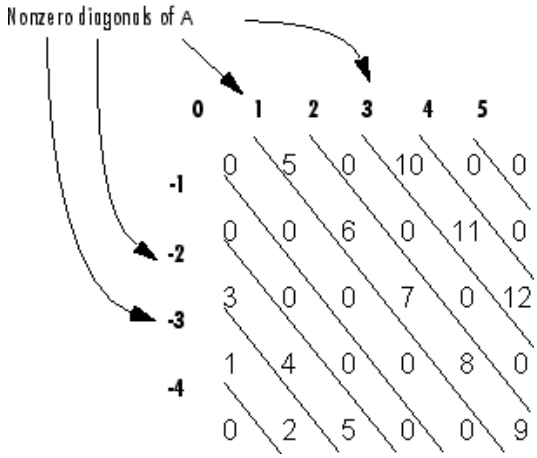

Note that the longest nonzero diagonal in A is contained in column 3 of B. The other nonzero diagonals of A have extra zeros added to their corresponding columns in B, to give all columns of B the same length. For the nonzero diagonals below the main diagonal of A, extra zeros are added at the tops of columns. For the nonzero diagonals above the main diagonal of A, extra zeros are added at the bottoms of columns. This is illustrated by the following diagram.

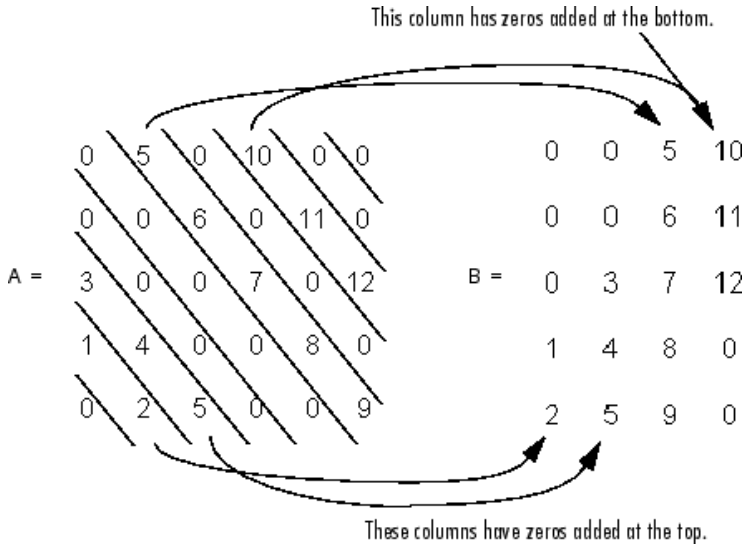

Example 2

This example generates a sparse tridiagonal representation of the classic second difference operator on `n` points.

```
e = ones(n,1);
A = spdiags([e -2*e e], -1:1, n, n)
```

Turn it into Wilkinson's test matrix (see `gallery`):

```
A = spdiags(abs(-(n-1)/2:(n-1)/2)',0,A)
```

Finally, recover the three diagonals:

```
B = spdiags(A)
```

Example 3

The second example is not square.

```
A = [11     0    13     0
      0    22     0    24
      0     0    33     0
```

```
     41     0     0    44
      0    52     0     0
      0     0    63     0
      0     0     0    74]
```

Here `m =7`, `n = 4`, and `p = 3`.

The statement `[B,d] = spdiags(A)` produces `d = [-3 0 2]'` and

```
B = [41    11     0
     52    22     0
     63    33    13
     74    44    24]
```

Conversely, with the above `B` and `d`, the expression `spdiags(B,d,7,4)` reproduces the original `A`.

Example 4

This example shows how `spdiags` creates the diagonals when the columns of `B` are longer than the diagonals they are replacing.

```
B = repmat((1:6)',[1 7])

B =

    1  1  1  1  1  1  1
    2  2  2  2  2  2  2
    3  3  3  3  3  3  3
    4  4  4  4  4  4  4
    5  5  5  5  5  5  5
    6  6  6  6  6  6  6

d = [-4 -2 -1 0 3 4 5];
A = spdiags(B,d,6,6);
full(A)

ans =

  1  0  0  4  5  6
  1  2  0  0  5  6
  1  2  3  0  0  6
  0  2  3  4  0  0
  1  0  3  4  5  0
```

```
  0   2   0   4   5   6
```

Example 5A

This example illustrates the use of the syntax `A = spdiags(B,d,m,n)`, under three conditions:

- `m` is equal to `n`
- `m` is greater than `n`
- `m` is less than `n`

The command used in this example is

```
A = full(spdiags(B, [-2 0 2], m, n))
```

where `B` is the 5-by-3 matrix shown below. The resulting matrix `A` has dimensions `m`-by-`n`, and has nonzero diagonals at `[-2 0 2]` (a sub-diagonal at `-2`, the main diagonal, and a super-diagonal at `2`).

```
B = [1     6    11
     2     7    12
     3     8    13
     4     9    14
     5    10    15]
```

The first and third columns of matrix `B` are used to create the sub- and super-diagonals of `A` respectively. In all three cases though, these two outer columns of `B` are longer than the resulting diagonals of `A`. Because of this, only a part of the columns are used in `A`.

When `m == n` or `m > n`, `spdiags` takes elements of the super-diagonal in `A` from the lower part of the corresponding column of `B`, and elements of the sub-diagonal in `A` from the upper part of the corresponding column of `B`.

```
A = full(spdiags(B, [-2 0 2], 5, 5))
 Matrix B                      Matrix A

1     6    11                  6     0    13     0     0
2     7    12                  0     7     0    14     0
3     8    13   == spdiags =>  1     0     8     0    15
4     9    14                  0     2     0     9     0
5    10    15                  0     0     3     0    10
```

`A(3,1)`, `A(4,2)`, and `A(5,3)` are taken from the upper part of `B(:,1)`.

`A(1,3)`, `A(2,4)`, and `A(3,5)` are taken from the lower part of `B(:,3)`.

```
A = full(spdiags(B, [-2 0 2], 5, 4))
 Matrix B                        Matrix A

1     6    11                   6     0    13     0
2     7    12                   0     7     0    14
3     8    13   == spdiags =>   1     0     8     0
4     9    14                   0     2     0     9
5    10    15                   0     0     3     0
```

Same as in Part A.

When `m < n`, `spdiags` does the opposite, taking elements of the super-diagonal in `A` from the upper part of the corresponding column of `B`, and elements of the sub-diagonal in `A` from the lower part of the corresponding column of `B`.

```
A = full(spdiags(B, [-2 0 2], 4, 5))
 Matrix B                        Matrix A

1     6    11                   6     0    11     0     0
2     7    12                   0     7     0    12     0
3     8    13   == spdiags =>   3     0     8     0    13
4     9    14                   0     4     0     9     0
5    10    15
```

`A(3,1)` and `A(4,2)` are taken from the lower part of `B(:,1)`.

`A(1,3)`, `A(2,4)`, and `A(3,5)` are taken from the upper part of `B(:,3)`.

Example 5B

Extract the diagonals from the first part of this example back into a column format using the command

```
B = spdiags(A)
```

You can see that in each case the original columns are restored (minus those elements that had overflowed the super- and sub-diagonals of matrix `A`).

```
       Matrix A                          Matrix B

6     0    13     0     0                 1    6    0
0     7     0    14     0                 2    7    0
```

```
1    0    8    0   15  == spdiags =>  3   8  13
0    2    0    9    0                 0   9  14
0    0    3    0   10                 0  10  15
```

```
    Matrix A                     Matrix B

6    0   13    0                 1   6   0
0    7    0   14                 2   7   0
1    0    8    0  == spdiags =>  3   8  13
0    2    0    9                 0   9  14
0    0    3    0
```

```
      Matrix A                       Matrix B

6    0   11    0    0                 0   6  11
0    7    0   12    0                 0   7  12
3    0    8    0   13  == spdiags =>  3   8  13
0    4    0    9    0                 4   9   0
```

See Also

diag | speye

Introduced before R2006a

specular

Calculate specular reflectance

Syntax

```
R = specular(Nx,Ny,Nz,S,V)
```

Description

`R = specular(Nx,Ny,Nz,S,V)` returns the reflectance of a surface with normal vector components `[Nx,Ny,Nz]`. `S` and `V` specify the direction to the light source and to the viewer, respectively. You can specify these directions as three vectors`[x,y,z]` or two vectors `[Theta Phi` (in spherical coordinates).

The specular highlight is strongest when the normal vector is in the direction of `(S+V)/2` where `S` is the source direction, and `V` is the view direction.

The surface spread exponent can be specified by including a sixth argument as in `specular(Nx,Ny,Nz,S,V,spread)`.

speye

Sparse identity matrix

Syntax

```
S = speye(m,n)
S = speye([m n])
S = speye(n)
S = speye
```

Description

`S = speye(m,n)` and `S = speye([m n])` form an `m`-by-`n` sparse matrix with `1`s on the main diagonal.

`S = speye(n)` abbreviates `speye(n,n)`.

`S = speye` returns the sparse form of the 1-by-1 identity matrix.

Examples

`I = speye(1000)` forms the sparse representation of the 1000-by-1000 identity matrix, which requires only about 16 kilobytes of storage. This is the same final result as `I = sparse(eye(1000,1000))`, but the latter requires eight megabytes for temporary storage for the full representation.

See Also

`spalloc` | `sprand` | `spones` | `spdiags` | `sprandn`

Introduced before R2006a

spfun

Apply function to nonzero sparse matrix elements

Syntax

```
f = spfun(fun,S)
```

Description

The `spfun` function selectively applies a function to only the *nonzero* elements of a sparse matrix `S`, preserving the sparsity pattern of the original matrix (except for underflow or if `fun` returns zero for some nonzero elements of `S`).

`f = spfun(fun,S)` evaluates `fun(S)` on the elements of `S` that are nonzero. `fun` is a function handle.

"Parameterizing Functions" explains how to provide additional parameters to the function `fun`, if necessary.

Examples

Given the 4-by-4 sparse diagonal matrix

```
S = spdiags([1:4]',0,4,4)

S =
   (1,1)        1
   (2,2)        2
   (3,3)        3
   (4,4)        4
```

Because `fun` returns nonzero values for all nonzero element of `S`, `f = spfun(@exp,S)` has the same sparsity pattern as `S`.

```
f =
   (1,1)       2.7183
   (2,2)       7.3891
```

```
   (3,3)       20.0855
   (4,4)       54.5982
```

whereas `exp(S)` has `1`s where `S` has `0`s.

```
full(exp(S))

ans =
    2.7183    1.0000    1.0000    1.0000
    1.0000    7.3891    1.0000    1.0000
    1.0000    1.0000   20.0855    1.0000
    1.0000    1.0000    1.0000   54.5982
```

Tips

Functions that operate element-by-element, like those in the `elfun` directory, are the most appropriate functions to use with `spfun`.

See Also

See Also

`sparse`

Topics

"Create Function Handle"

Introduced before R2006a

sph2cart

Transform spherical coordinates to Cartesian

Syntax

```
[x,y,z] = sph2cart(azimuth,elevation,r)
```

Description

`[x,y,z] = sph2cart(azimuth,elevation,r)` transforms corresponding elements of the spherical coordinate arrays `azimuth`, `elevation`, and `r` to Cartesian, or *xyz*, coordinates.

Examples

Spherical to Cartesian Coordinates

Convert the spherical coordinates defined by corresponding entries in the matrices `az`, `el`, and `r` to Cartesian coordinates `x`, `y`, and `z`. These points correspond to the eight vertices of a cube.

```
az = [0.7854 0.7854 -0.7854 -0.7854; 2.3562 2.3562 -2.3562 -2.3562]
```

```
az =

    0.7854    0.7854   -0.7854   -0.7854
    2.3562    2.3562   -2.3562   -2.3562
```

```
el = [0.6155 -0.6155 0.6155 -0.6155; 0.6155 -0.6155 0.6155 -0.6155]
```

```
el =

    0.6155   -0.6155    0.6155   -0.6155
    0.6155   -0.6155    0.6155   -0.6155
```

```
r = 1.7321*ones(2,4)

r =

    1.7321    1.7321    1.7321    1.7321
    1.7321    1.7321    1.7321    1.7321


[x,y,z] = sph2cart(az,el,r)

x =

    1.0000    1.0000    1.0000    1.0000
   -1.0000   -1.0000   -1.0000   -1.0000


y =

    1.0000    1.0000   -1.0000   -1.0000
    1.0000    1.0000   -1.0000   -1.0000


z =

    1.0001   -1.0001    1.0001   -1.0001
    1.0001   -1.0001    1.0001   -1.0001
```

Input Arguments

`azimuth` — Azimuth angle

scalar | vector | matrix | multidimensional array

Azimuth angle, specified as a scalar, vector, matrix, or multidimensional array. `azimuth`, `elevation`, and `r` must be the same size, or any of them can be scalar.

`azimuth` is the counterclockwise angle in the *x*-*y* plane measured in radians from the positive *x*-axis.

Data Types: `single` | `double`

Complex Number Support: Yes

`elevation` — Elevation angle

scalar | vector | matrix | multidimensional array

Elevation angle, specified as a scalar, vector, matrix, or multidimensional array. `azimuth`, `elevation`, and `r` must be the same size, or any of them can be scalar.

`elevation` is the elevation angle in radians from the *x*-*y* plane.

Data Types: `single` | `double`
Complex Number Support: Yes

`r` — Radius

scalar | vector | matrix | multidimensional array

Radius, specified as a scalar, vector, matrix, or multidimensional array. `azimuth`, `elevation`, and `r` must be the same size, or any of them can be scalar.

The length units of `r` can be arbitrary, and the output arrays `x`, `y`, and `z` use the same units.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

`x,y,z` — Cartesian coordinates

arrays

Cartesian coordinates, returned as arrays.

Algorithms

The mapping from spherical coordinates to three-dimensional Cartesian coordinates is

```
x = r .* cos(elevation) .* cos(azimuth)
y = r .* cos(elevation) .* sin(azimuth)
```

```
z = r .* sin(elevation)
```

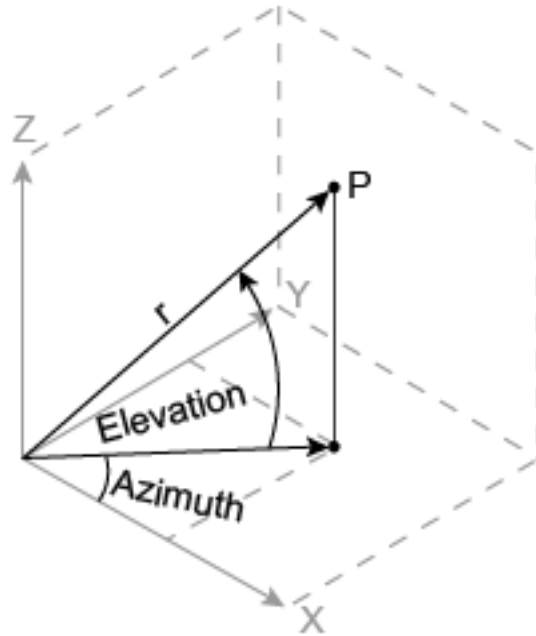

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`cart2pol` | `cart2sph` | `pol2cart`

Introduced before R2006a

sphere

Generate sphere

Syntax

```
sphere
sphere(n)
sphere(ax,...)
[X,Y,Z] = sphere(...)
```

Description

The `sphere` function generates the *x*-, *y*-, and *z*-coordinates of a unit sphere for use with `surf` and `mesh`.

`sphere` generates a sphere consisting of 20-by-20 faces.

`sphere(n)` draws a `surf` plot of an `n`-by-`n` sphere in the current figure.

`sphere(ax,...)` creates the sphere in the axes specified by `ax` instead of in the current axes. Specify `ax` as the first input argument.

`[X,Y,Z] = sphere(...)` returns the coordinates of the `n`-by-`n` sphere in three matrices that are `(n+1)`-by-`(n+1)` in size. You draw the sphere with `surf(X,Y,Z)` or `mesh(X,Y,Z)`.

Examples

Plot Sphere

Generate and plot a sphere.

```
figure
sphere
```

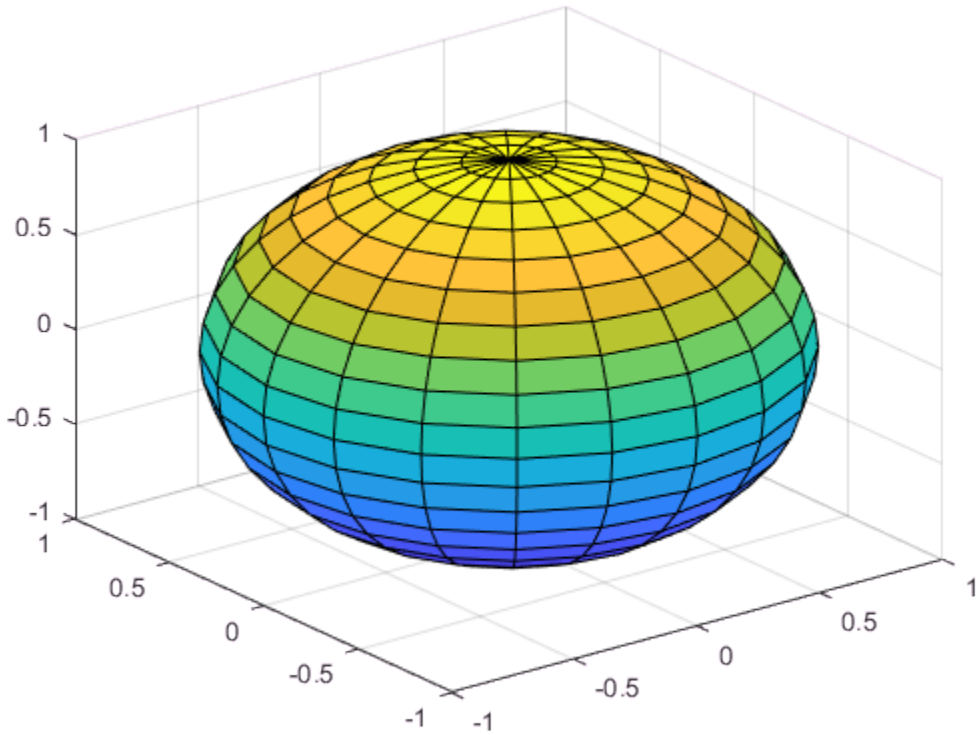

Plot Multiple Spheres

Define `x`, `y`, and `z` as coordinates of a sphere.

```
[x,y,z] = sphere;
```

Plot a sphere centered at the origin. Plot two more spheres centered at `(3,-2,0)` and `(0,1,-3)`.

```
figure
surf(x,y,z)

hold on
```

```
surf(x+3,y-2,z) % centered at (3,-2,0)
surf(x,y+1,z-3) % centered at (0,1,-3)
```

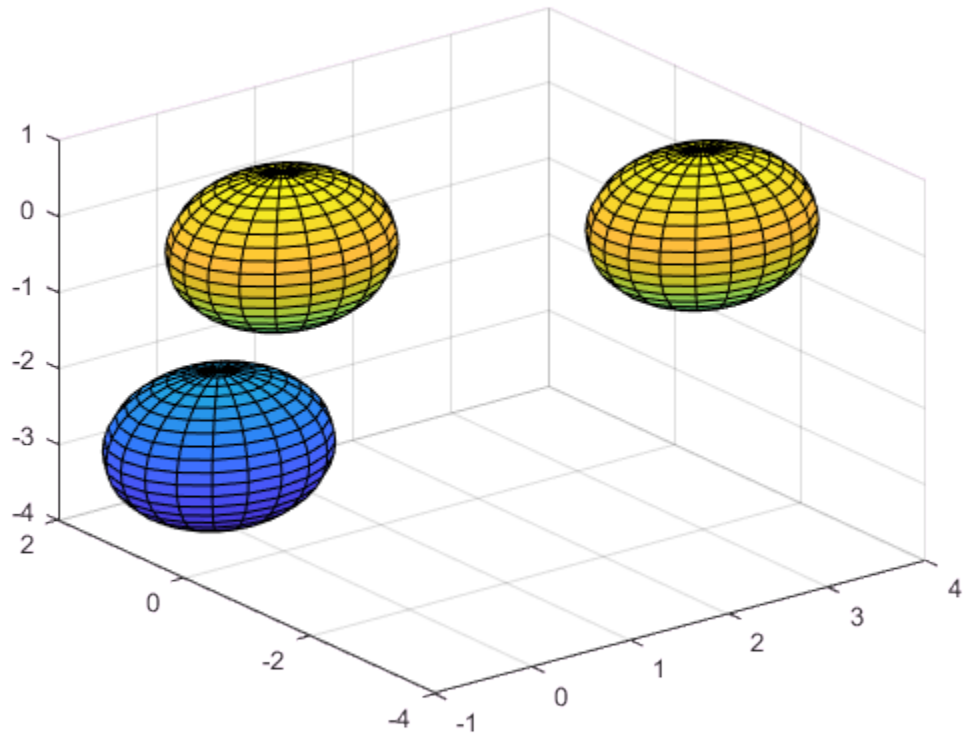

See Also

`cylinder` | `axis`

Introduced before R2006a

spinmap

Spin colormap

Syntax

```
spinmap
spinmap(t)
spinmap(t,inc)
spinmap('inf')
```

Description

The `spinmap` function shifts the colormap RGB values by some incremental value. For example, if the increment equals 1, color 1 becomes color 2, color 2 becomes color 3, etc.

`spinmap` cyclically rotates the colormap for approximately five seconds using an incremental value of 2.

`spinmap(t)` rotates the colormap for approximately 10`*t` seconds. The amount of time specified by `t` depends on your hardware configuration (e.g., if you are running MATLAB software over a network).

`spinmap(t,inc)` rotates the colormap for approximately 10`*t` seconds and specifies an increment `inc` by which the colormap shifts. When `inc` is 1, the rotation appears smoother than the default (i.e., 2). Increments greater than 2 are less smooth than the default. A negative increment (e.g., –2) rotates the colormap in a negative direction.

`spinmap('inf')` rotates the colormap for an infinite amount of time. To break the loop, press **Ctrl+C**.

See Also

`colormap` | `colormapeditor`

Introduced before R2006a

spline

Cubic spline data interpolation

Syntax

```
s = spline(x,y,xq)
pp = spline(x,y)
```

Description

`s = spline(x,y,xq)` returns a vector of interpolated values `s` corresponding to the query points in `xq`. The values of `s` are determined by cubic spline interpolation of `x` and `y`.

`pp = spline(x,y)` returns a piecewise polynomial structure for use by `ppval` and the spline utility `unmkpp`.

Examples

Spline Interpolation of Sine Data

Use `spline` to interpolate a sine curve over unevenly-spaced sample points.

```
x = [0 1 2.5 3.6 5 7 8.1 10];
y = sin(x);
xx = 0:.25:10;
yy = spline(x,y,xx);
plot(x,y,'o',xx,yy)
```

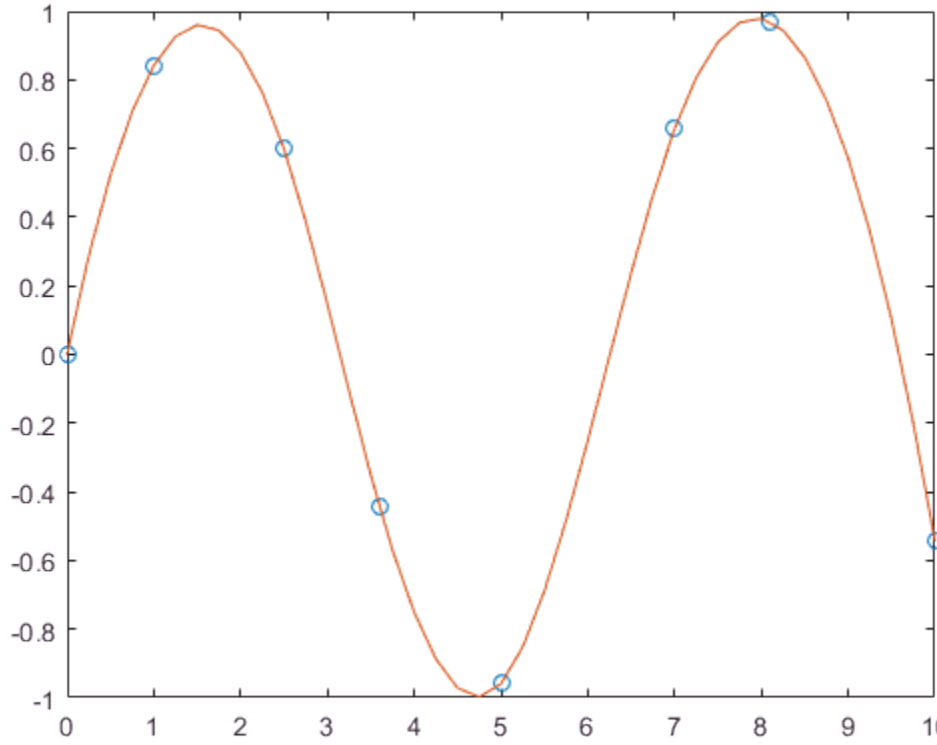

Spline Interpolation of Distribution with Specified Endpoint Slopes

Use clamped or complete spline interpolation when endpoint slopes are known. This example enforces zero slopes at the end points of the interpolation.

```
x = -4:4;
y = [0 .15 1.12 2.36 2.36 1.46 .49 .06 0];
cs = spline(x,[0 y 0]);
xx = linspace(-4,4,101);
plot(x,y,'o',xx,ppval(cs,xx),'-');
```

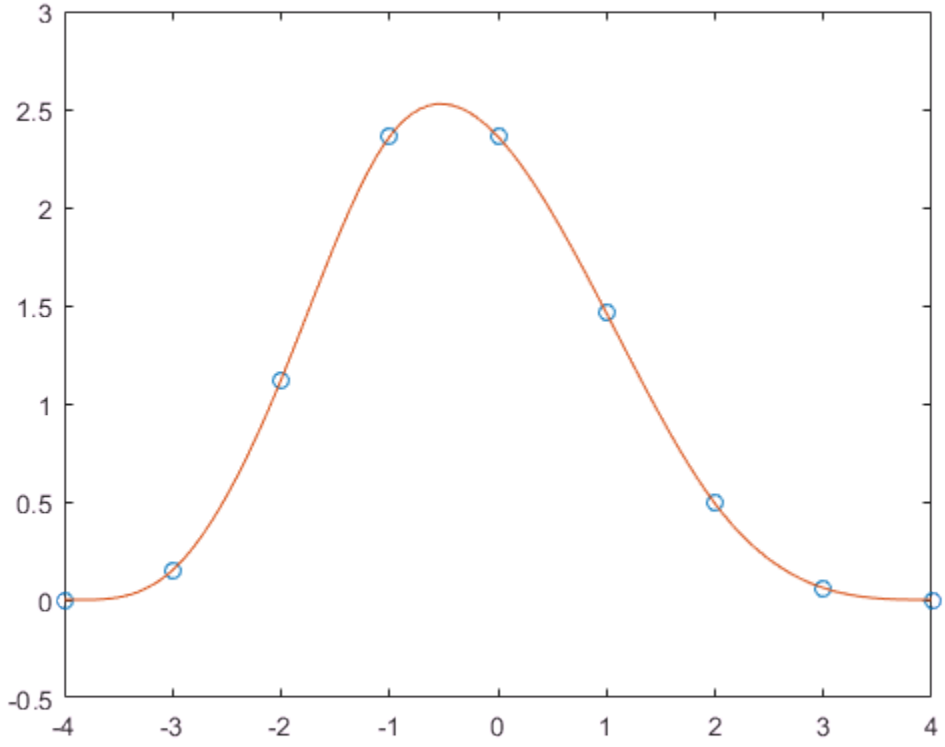

Extrapolation Using Cubic Spline

Extrapolate a data set to predict population growth.

Create two vectors to represent the census years from 1900 to 1990 (`t`) and the corresponding United States population in millions of people (`p`).

```
t = 1900:10:1990;
p = [ 75.995  91.972  105.711  123.203  131.669 ...
     150.697 179.323  203.212  226.505  249.633 ];
```

Extrapolate and predict the population in the year 2000 using a cubic spline.

```
spline(t,p,2000)
```

```
ans = 270.6060
```

Spline Interpolation of Angular Data

Generate the plot of a circle, with the five data points `y(:,2),...,y(:,6)` marked with o's. The matrix `y` contains two more columns than does `x`. Therefore, `spline` uses `y(:,1)` and `y(:,end)` as the endslopes. The circle starts and ends at the point (1,0), so that point is plotted twice.

```
x = pi*[0:.5:2];
y = [0  1  0 -1  0  1  0;
     1  0  1  0 -1  0  1];
pp = spline(x,y);
yy = ppval(pp, linspace(0,2*pi,101));
plot(yy(1,:),yy(2,:),'-b',y(1,2:5),y(2,2:5),'or'), axis equal
```

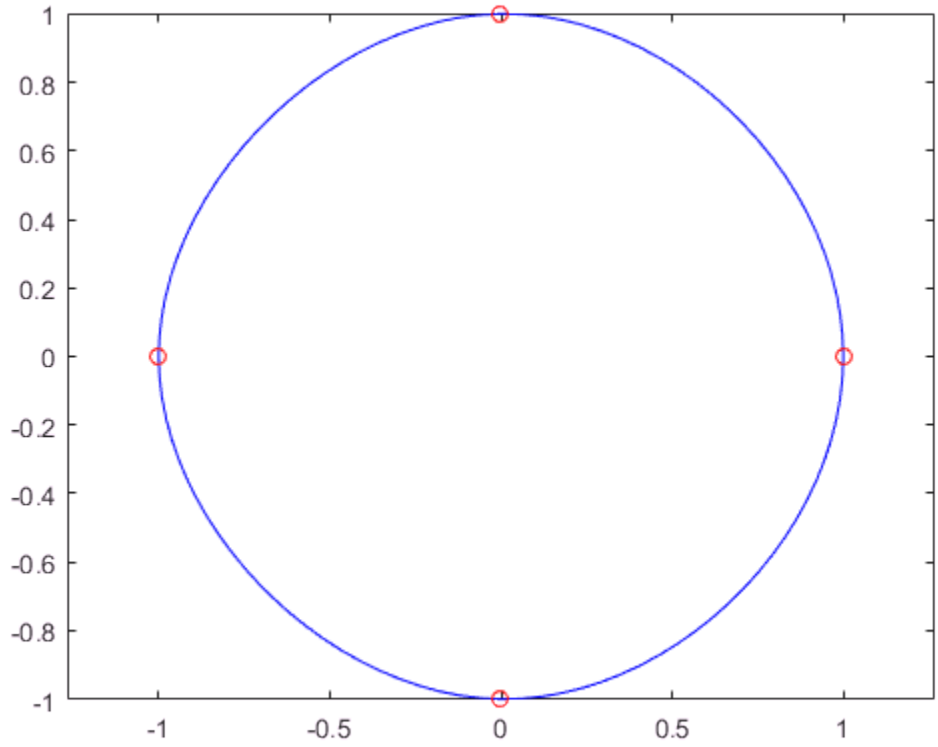

Spline Interpolation of Sine and Cosine Data

Use spline to sample a function over a finer mesh.

Generate sine and cosine curves for a few values between 0 and 1. Use spline interpolation to sample the functions over a finer mesh.

```
x = 0:.25:1;
Y = [sin(x); cos(x)];
xx = 0:.1:1;
YY = spline(x,Y,xx);
plot(x,Y(1,:),'o',xx,YY(1,:),'-')
hold on
```

```
plot(x,Y(2,:),'o',xx,YY(2,:),':')
hold off
```

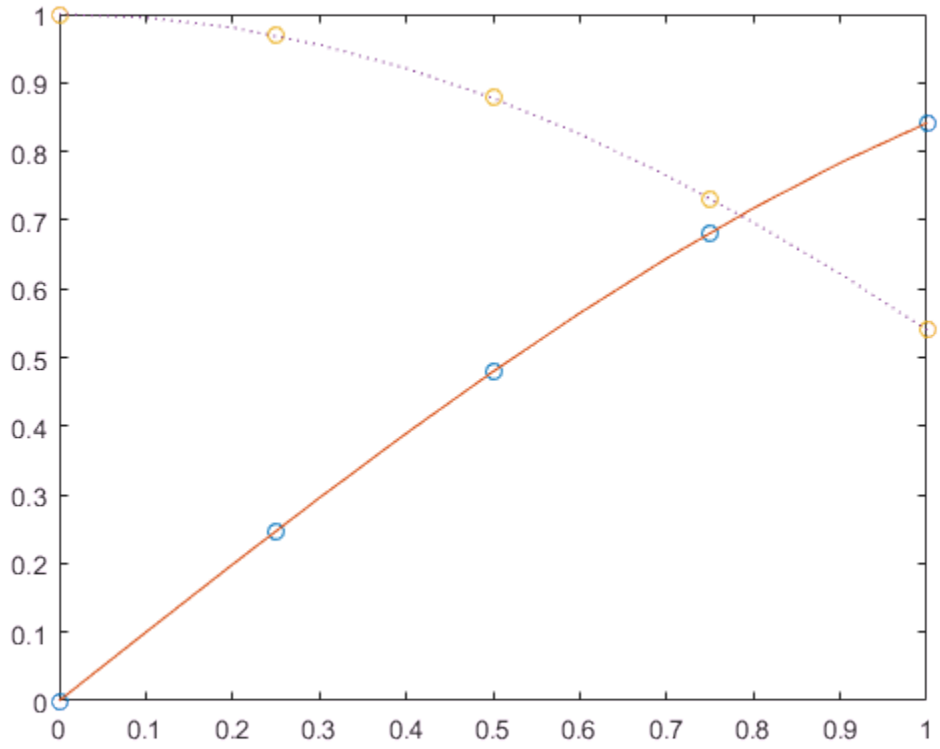

Data Interpolation Using `spline` and `pchip`

Compare the interpolation results produced by `spline` and `pchip` for two different functions.

Create vectors of `x` values, function values at those points `y`, and query points `xq`. Compute interpolations at the query points using both `spline` and `pchip`. Plot the interpolated function values at the query points for comparison.

```
x = -3:3;
y = [-1 -1 -1 0 1 1 1];
```

```
xq1 = -3:.01:3;
p = pchip(x,y,xq1);
s = spline(x,y,xq1);
plot(x,y,'o',xq1,p,'-',xq1,s,'-.')
legend('Sample Points','pchip','spline','Location','SouthEast')
```

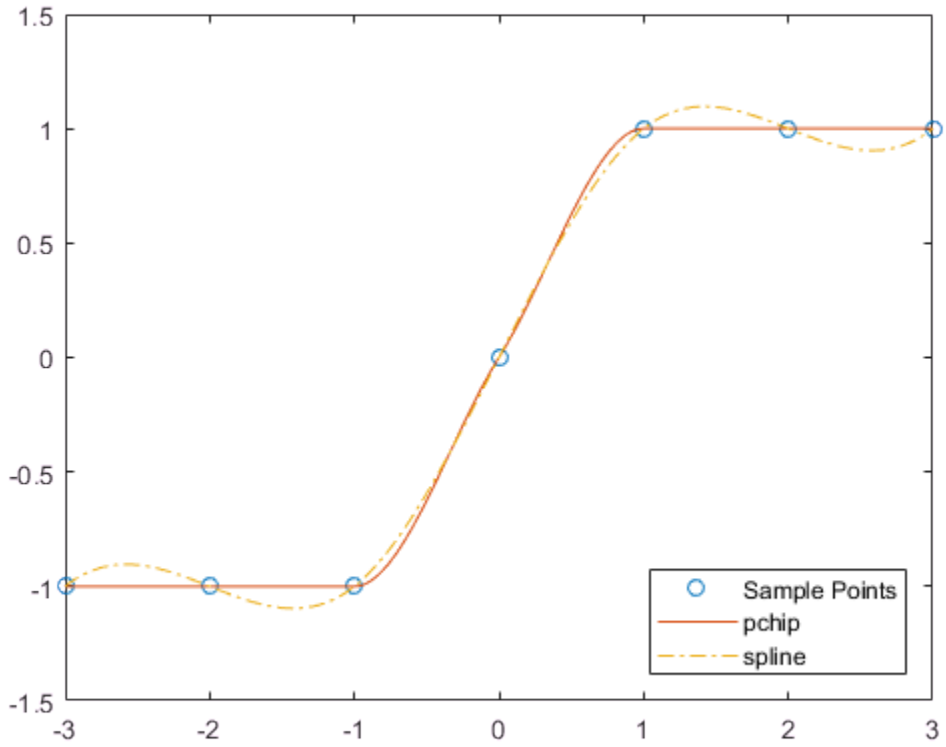

In this case, `pchip` is favorable since it does not oscillate as freely between the sample points.

Perform a second comparison using an oscillatory sample function.

```
x = 0:25;
y = besselj(1,x);
xq2 = 0:0.01:25;
```

```
p = pchip(x,y,xq2);
s = spline(x,y,xq2);
plot(x,y,'o',xq2,p,'-',xq2,s,'-.')
legend('Sample Points','pchip','spline')
```

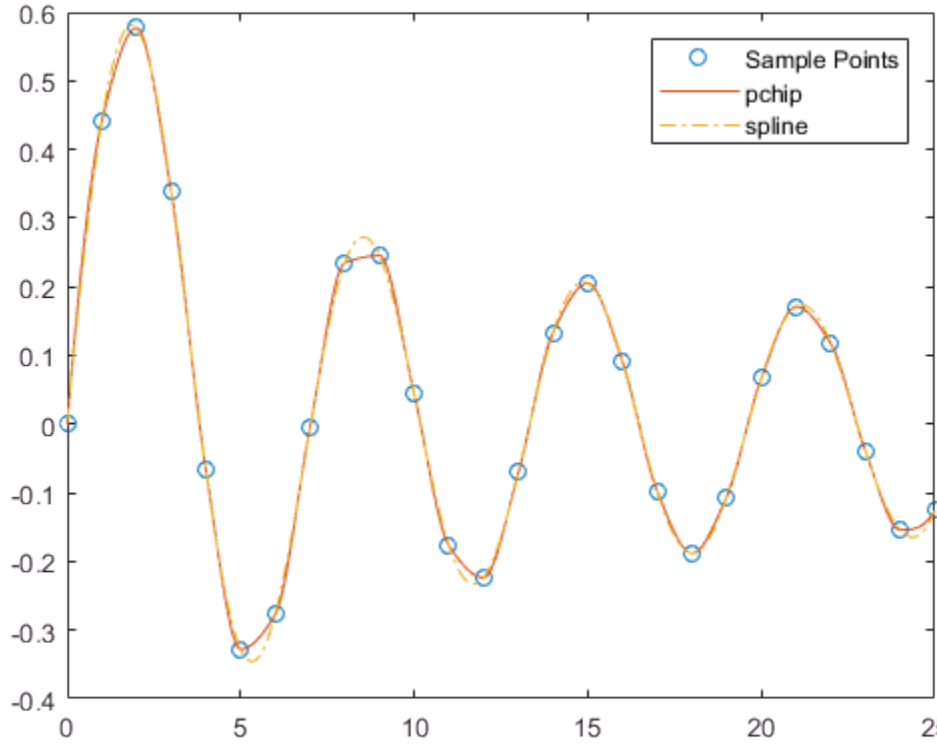

When the underlying function is oscillatory, `spline` captures the movement between points better than `pchip`.

Input Arguments

x — *x*-coordinates
vector

x-coordinates, specified as a vector. The vector `x` specifies the points at which the data `y` is given. The elements of `x` must be unique.

Data Types: `single` | `double`

y — Function values at *x*-coordinates

vector | matrix | array

Function values at *x*-coordinates, specified as a numeric vector, matrix, or array. `x` and `y` must have the same length.

If `y` is a matrix or array, then the values in the last dimension, `y(:,...,:,j)`, are taken as the values to match with `x`. In that case, the last dimension of `y` must be the same length as `x`.

The endslopes of the cubic spline follow these rules:

- If `x` and `y` are vectors of the same size, then the not-a-knot end conditions are used.
- If `x` or `y` is a scalar, then it is expanded to have the same length as the other and the not-a-knot end conditions are used.
- If `y` is a vector that contains two more values than `x` has entries, then `spline` uses the first and last values in `y` as the endslopes for the cubic spline. For example, if `y` is a vector, then:
  - `f(x) = y(2:end-1)`
  - `df(min(x)) = y(1)`
  - `df(max(x)) = y(end)`
- If `y` is a matrix or an `N`-dimensional array with `size(y,N)` equal to `length(x)+2`, then these properties hold:
  - `f(x(j))` matches the value `y(:,...,:,j+1)` for `j = 1:length(x)`
  - `Df(min(x))` matches `y(:,:,...:,1)`
  - `Df(max(x))` matches `y(:,:,...:,end)`

Data Types: `single` | `double`

xq — Query points

vector

Query points, specified as a vector. The points specified in `xq` are the *x*-coordinates for the interpolated function values `s` that `spline` computes.

Data Types: `single` | `double`

Output Arguments

`s` — Interpolated values at query points

vector | matrix | array

Interpolated values at query points, returned as a vector, matrix, or array.

The size of `s` is related to the sizes of the inputs:

- If `y` is a scalar or vector, then `s` has the same size as `xq`.
- If `y` is an array that is not a vector, then these conditions apply:
  - If `xq` is a scalar or vector, then `size(s)` equals `[d1, d2, ..., dk, length(xq)]`.
  - If `xq` is an array of size `[m1,m2,...,mj]`, then `size(s)` equals `[d1,d2,...,dk,m1,m2,...,mj]`.

`pp` — Piecewise polynomial

structure

Piecewise polynomial, returned as a structure. Use this structure with the `ppval` function to evaluate the piecewise polynomial at one or more query points. The structure has these fields.

Field	Description
`form`	`'pp'` for *piecewise polynomial*
`breaks`	Vector of length `L+1` with strictly increasing elements that represent the start and end of each of `L` intervals
`coefs`	`L`-by-`k` matrix with each row `coefs(i,:)` containing the local coefficients of an order `k` polynomial on the `i`th interval, `[breaks(i),breaks(i+1)]`
`pieces`	Number of pieces, `L`
`order`	Order of the polynomials

Field	Description
`dim`	Dimensionality of target

Since the polynomial coefficients in `coefs` are local coefficients for each interval, you must subtract the lower endpoint of the corresponding knot interval to use the coefficients in a conventional polynomial equation. In other words, for the coefficients `[a,b,c,d]` on the interval `[x1,x2]`, the corresponding polynomial is

$$f(x) = a(x - x_1)^3 + b(x - x_1)^2 + c(x - x_1) + d.$$

Tips

- You also can perform spline interpolation using the `interp1` function with the command `interp1(x,y,xq,'spline')`. While `spline` performs interpolation on rows of an input matrix, `interp1` performs interpolation on columns of an input matrix.

Algorithms

A tridiagonal linear system (possibly with several right-hand sides) is solved for the information needed to describe the coefficients of the various cubic polynomials that make up the interpolating spline. `spline` uses the functions `ppval`, `mkpp`, and `unmkpp`. These routines form a small suite of functions for working with piecewise polynomials. For access to more advanced features, see `interp1` or the Curve Fitting Toolbox spline functions.

References

[1] de Boor, Carl. *A Practical Guide to Splines*. Springer-Verlag, New York: 1978.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input `x` must be strictly increasing.
- Code generation does not remove `y` entries with `NaN` values.
- Code generation does not report an error for infinite endslopes in `y`.
- If you generate code for the `pp = spline(x,y)` syntax, then you cannot input `pp` to the `ppval` function in MATLAB. To create a MATLAB `pp` structure from a `pp` structure created by the code generator:
  - In code generation, use `unmkpp` to return the piecewise polynomial details to MATLAB.
  - In MATLAB, use `mkpp` to create the `pp` structure.

See Also

See Also

`interp1` | `mkpp` | `pchip` | `ppval` | `unmkpp`

Introduced before R2006a

split

Split strings in string array, or split calendar duration into numeric and duration units

Syntax

```
newStr = split(str)
newStr = split(str,delimiter)
newStr = split(str,delimiter,dim)
[newStr,matches] = split( ___ )
```

```
[X1,X2,...] = split(t,units)
```

Description

`newStr = split(str)` divides `str` at whitespace characters and returns the result as the output array `newStr`. The input array `str` can be a string array, a character vector, or a cell array of character vectors. If `str` is a string array, then so is `newStr`. Otherwise, `newStr` is a cell array of character vectors. `newStr` does not include the whitespace characters from `str`.

If `str` contains multiple elements, then each element must be divisible into the same number of substrings.

- If `str` is a string scalar or character vector, then `newStr` is an `N`-by-`1` string array or cell array of character vectors, where `N` is the number of substrings.
- If `str` is an `M`-by-`1` string array or cell array, then `newStr` is an `M`-by-`N` array.
- If `str` is a `1`-by-`M` string array or cell array, then `newStr` is an `1`-by-`M`-by-`N` array.

For a string array or cell array of any size, `split` orients the `N` substrings along the first trailing dimension with a size of `1`.

If the number of substrings is not the same for every element of `str`, then call `split` in a `for`-loop to divide the elements of `str` one at a time.

`newStr = split(str,delimiter)` divides each element of `str` at the delimiters specified by `delimiter`. `newStr` does not include the delimiters.

`newStr = split(str,delimiter,dim)` divides each element of `str` into a vector oriented along the dimension specified by `dim`.

`[newStr,matches] = split( ___ )` additionally returns an array, `matches`, which contains all occurrences of delimiters at which the `split` function splits `str`. You can use this syntax with any of the input arguments of the previous syntaxes.

`[X1,X2,...] = split(t,units)` returns the calendar duration values in `t` as separate numeric arrays, one for each of the date or time units specified by `units`. The number of date and time units specified by `units` determines the number of output arguments.

Examples

Split Strings at Whitespace and Rejoin Them

Split names in a string array at whitespace. Then reorder the strings and join them so that the last names precede the first names.

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Create a 3-by-1 string array containing names.

```
names = ["Mary Jones";
         "John Spencer";
         "Elizabeth Young"]
```

```
names = 3×1 string array
    "Mary Jones"
    "John Spencer"
    "Elizabeth Young"
```

Split `names` at whitespace, making it a 3-by-2 string array.

```
names = split(names)
```

```
names = 3×2 string array
    "Mary"         "Jones"
    "John"         "Spencer"
    "Elizabeth"    "Young"
```

Switch the columns of `names` so that the last names are in the first column. Add a comma after each last name.

```
names = [names(:,2) names(:,1)];
names(:,1) = names(:,1) + ','
```

```
names = 3×2 string array
    "Jones,"      "Mary"
    "Spencer,"    "John"
    "Young,"      "Elizabeth"
```

Join the last and first names. The `join` function places a space character between the strings it joins. After the join, `names` is a 3-by-1 string array.

```
names = join(names)
```

```
names = 3×1 string array
    "Jones, Mary"
    "Spencer, John"
    "Young, Elizabeth"
```

Split String at Delimiter and Join with New Delimiter

Create a string that contains the path to a folder. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
myPath = "/Users/jdoe/My Documents/Examples"
```

```
myPath =
"/Users/jdoe/My Documents/Examples"
```

Split the path at the `/` character. `split` returns `myFolders` as a 5-by-1 string array. The first string is `""` because `myPath` starts with the `/` character.

```
myFolders = split(myPath,"/")
```

```
myFolders = 5×1 string array
    ""
    "Users"
    "jdoe"
    "My Documents"
```

```
    "Examples"
```

Join `myFolders` into a new path with `\` as the separator. Add `C:` as the beginning of the path.

```
myNewPath = join(myFolders,"\");
myNewPath = 'C:' + myNewPath
```

```
myNewPath =
"C:\Users\jdoe\My Documents\Examples"
```

Split String at Multiple Delimiters

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "A horse! A horse! My kingdom for a horse!"
```

```
str =
"A horse! A horse! My kingdom for a horse!"
```

Split `str` at exclamation points and at space characters. `newStr` is a 10-by-1 string array. The last string is an empty string, `""`, because the last character in `str` is a delimiter.

```
newStr = split(str,[" ","!"])
```

```
newStr = 12×1 string array
    "A"
    "horse"
    ""
    "A"
    "horse"
    ""
    "My"
    "kingdom"
    "for"
    "a"
    "horse"
    ""
```

Split String Array with Missing Data Between Delimiters

Create a string array in which each element contains comma-delimited data about a patient. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
patients = ["LastName,Age,Gender,Height,Weight";
            "Adams,47,F,64,123";
            "Jones,,,68,175";
            "King,,M,66,180";
            "Smith,38,F,63,118"]
```

```
patients = 5×1 string array
    "LastName,Age,Gender,Height,Weight"
    "Adams,47,F,64,123"
    "Jones,,,68,175"
    "King,,M,66,180"
    "Smith,38,F,63,118"
```

Split the string array. A pair of commas with nothing between them indicates missing data. When `split` divides on repeated delimiters, it returns empty strings as corresponding elements of the output array.

```
patients = split(patients,",")
```

```
patients = 5×5 string array
    "LastName"    "Age"    "Gender"    "Height"    "Weight"
    "Adams"       "47"     "F"         "64"        "123"
    "Jones"       ""       ""          "68"        "175"
    "King"        ""       "M"         "66"        "180"
    "Smith"       "38"     "F"         "63"        "118"
```

Orient Strings Along Specified Dimension

Create a 3-by-1 string array containing names. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
names = ["Mary Jones";
         "John Spencer";
         "Elizabeth Young"]
```

```
names = 3×1 string array
```

```
    "Mary Jones"
    "John Spencer"
    "Elizabeth Young"
```

Split the array at whitespace. By default, `split` orients the output substrings along the first trailing dimension with a size of 1. Since `names` is a 3-by-1 string array, `split` orients the substrings along the second dimension of `splitNames`: that is, the columns.

```
splitNames = split(names)
```

```
splitNames = 3×2 string array
    "Mary"         "Jones"
    "John"         "Spencer"
    "Elizabeth"    "Young"
```

To orient the substrings along the rows, or first dimension, specify the dimension after you specify the delimiter. `splitNames` is now a 2-by-3 string array, with the first names in the first row and the last names in the second row.

```
splitNames = split(names," ",1)
```

```
splitNames = 2×3 string array
    "Mary"     "John"       "Elizabeth"
    "Jones"    "Spencer"    "Young"
```

Split String and Return Delimiters

Create a string. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "bacon, lettuce, and tomato"
```

```
str =
"bacon, lettuce, and tomato"
```

Split `str` on delimiters. Return the results of the split in a string array, and the delimiters in a second string array. `split` returns an empty string when there is no text between consecutive delimiters.

```
[newStr,matches] = split(str,["and",",","  "])
```

```
newStr = 7×1 string array
    "bacon"
    ""
    "lettuce"
    ""
    ""
    ""
    "tomato"


matches = 6×1 string array
    ","
    " "
    ","
    " "
    "and"
    " "
```

Join `newStr` and `matches` back together with the `join` function.

```
originalStr = join(newStr,matches)
```

```
originalStr =
"bacon, lettuce, and tomato"
```

Split Calendar Duration Array

Create a `calendarDuration` array.

```
T = calmonths(15:17) + caldays(8) + hours(1.2345)
```

```
T = 1×3 calendarDuration array
   1y 3mo 8d 1h 14m 4.2s   1y 4mo 8d 1h 14m 4.2s   1y 5mo 8d 1h 14m 4.2s
```

Get the month, day, and time.

```
[m,d,t] = split(T,{'months','days','time'})
```

```
m =

    15    16    17
```

```
d =

     8     8     8


t = 1×3 duration array
   01:14:04   01:14:04   01:14:04
```

Get the year, month, day, and time.

```
[y,m,d,t] = split(T,{'years','months','days','time'})
```

```
y =

     1     1     1


m =

     3     4     5


d =

     8     8     8


t = 1×3 duration array
   01:14:04   01:14:04   01:14:04
```

When you request both the year and month, `split` carries over month values greater than 12 to the year value.

- "Create String Arrays"
- "Analyze Text Data with String Arrays"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`delimiter` — Delimiting substrings

string array | character vector | cell array of character vectors

Delimiting substrings, specified as a string array, a character vector, or a cell array of character vectors. The substrings specified in `delimiter` do not appear in the output `newStr`.

Specify multiple delimiters in a string array or a cell array of character vectors. The `split` function splits `str` on the elements of `delimiter`. The order in which delimiters appear in `delimiter` does not matter unless multiple delimiters begin a match at the same character in `str`. In that case, the `split` function splits on the first matching delimiter in `delimiter`.

Example: `split(str,{' ',',','--'})` splits `str` on spaces, commas, and pairs of consecutive dashes.

Data Types: `string` | `char` | `cell`

`dim` — Dimension along which to split strings

positive integer

Dimension along which to split strings, specified as a positive integer. If `dim` is not specified, then the default is the last array dimension with a size that does not equal `1`.

`t` — Input calendar duration

`calendarDuration` array

Input calendar duration, specified as a `calendarDuration` array.

Data Types: `calendarDuration`

`units` — Date and time units

character vector | cell array of character vectors

Date and time units, specified as a character vector or a cell array of character vectors. Specify `units` only when the first input argument is the `calendarDuration` array, `t`.

The character vectors can be one or more of the values in the table:

Value	Split `t` into Units of...
`'years'`	years
`'quarters'`	quarters
`'months'`	months
`'weeks'`	weeks
`'days'`	days
`'time'`	time, in the format hours:minutes:seconds

You must specify date and time units from largest to smallest. For example, `{'years','months'}` is valid, but `{'months','years'}` is not.

Example: `split(t,{'years','months','days'})`

Data Types: `char` | `cell`

Output Arguments

`newStr` — Substrings split out of original array

string array | cell array of character vectors

Substrings split out of original array, returned as a string array or a cell array of character vectors. If the input array `str` is a string array, then so is `newStr`. Otherwise, `newStr` is a cell array of character vectors.

Data Types: `string`

`matches` — Identified delimiters

string array | cell array of character vectors

Identified delimiters, returned as a string array or a cell array of character vectors. If the input array `str` is a string array, then so is `matches`. Otherwise, `matches` is a cell array of character vectors.

`matches` always contains one fewer element than output `newStr` contains.

Data Types: `string`

`X1,X2,...` — Output numeric and `duration` values

arrays

Output numeric and `duration` values, returned as arrays. `split` returns year, month, and day values in numeric arrays and time values in `duration` arrays.

Data Types: `double` | `duration`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

Only tall `calendarDuration` arrays are supported.

For more information, see "Tall Arrays".

See Also

See Also

`caldays` | `calmonths` | `calquarters` | `calweeks` | `calyears` | `compose` | `join` | `newline` | `regexp` | `splitlines` | `sprintf` | `string` | `time`

Topics

"Create String Arrays"
"Analyze Text Data with String Arrays"
"Regular Expressions"

Introduced in R2014b

splitlines

Split string at newline characters

Syntax

```
newStr = splitlines(str)
```

Description

`newStr = splitlines(str)` splits `str` at newline characters and returns the result as the output array `newStr`.

`splitlines` splits at actual newline characters, not at the literal `\n`. To split a string that contains `\n`, first use `compose` and then use `splitlines`.

Examples

Split String at Newline

Split a string at a newline character. When the literal `\n` represents a newline character, convert it to an actual newline using the `compose` function. Then use `splitlines` to split the string at the newline character.

Create a string in which two lines of text are separated by `\n`. You can use `+` to concatenate text onto the end of a string. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "In Xanadu did Kubla Khan";
str = str + "\n" + "A stately pleasure-dome decree"
```

```
str =
"In Xanadu did Kubla Khan\nA stately pleasure-dome decree"
```

Convert `\n` into an actual newline character. Although `str` displays on two lines, `str` is a 1-by-1 string containing both lines of text.

```
str = compose(str)
```

```
str =
    "In Xanadu did Kubla Khan
     A stately pleasure-dome decree"
```

Split `str` at the newline character. `newStr` is a 1-by-2 string array. Each element contains one line of the text.

```
newStr = splitlines(str)
```

```
newStr = 2×1 string array
    "In Xanadu did Kubla Khan"
    "A stately pleasure-dome decree"
```

Split Character Vector at Newlines

Create a character vector and split it at newline characters. The `newline` function returns the newline character, `char(10)`.

```
chr = 'Whose woods these are I think I know.';
chr = [chr newline 'His house is in the village though;']
```

```
chr =
    'Whose woods these are I think I know.
     His house is in the village though;'
```

```
C = splitlines(chr)
```

```
C = 2×1 cell array
    'Whose woods these are I think I know.'
    'His house is in the village though;'
```

- "Create String Arrays"
- "Analyze Text Data with String Arrays"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors. If `str` is a string array or cell array of character vectors, then each element of `str` must contain the same number of newlines.

Output Arguments

`newStr` — Output text

string array | cell array of character vectors

Output text, returned as a string array or a cell array of character vectors. `newStr` has one more dimension than `str`. The size of the new dimension is one more than the number of newlines in a string element. `splitlines` assigns the results of the split along the new dimension. For example, if `str` is a 2-by-3 string array, and each string has three newline characters, then `newStr` is a 2-by-3-by-4 array.

If the input array `str` is a string array, then so is `newStr`. Otherwise, `newStr` is a cell array of character vectors.

Tips

If the elements of a string array have different numbers of newline characters, use a `for`-loop to access the string elements individually and split them.

See Also

See Also

`compose` | `join` | `newline` | `regexp` | `split` | `sprintf` | `string`

Topics

"Create String Arrays"
"Analyze Text Data with String Arrays"

Introduced in R2016b

splitapply

Split data into groups and apply function

Syntax

```
Y = splitapply(func,X,G)
Y = splitapply(func,X1,...,XN,G)
Y = splitapply(func,T,G)
[Y1,...,YM] = splitapply( ___ )
```

Description

`Y = splitapply(func,X,G)` splits `X` into groups specified by `G` and applies the function `func` to each group. `splitapply` returns `Y` as an array that contains the concatenated outputs from `func` for the groups split out of `X`. The input argument `G` is a vector of positive integers that specifies the groups to which corresponding elements of `X` belong. If `G` contains `NaN` values, `splitapply` omits the corresponding values in `X` when it splits `X` into groups. To create `G`, you can use the `findgroups` function.

`splitapply` combines two steps in the "Split-Apply-Combine Workflow" on page 1-10685.

`Y = splitapply(func,X1,...,XN,G)` splits `X1,...,XN` into groups and applies `func`. The `splitapply` function calls `func` once per group, with corresponding elements from `X1,...,XN` as the `N` input arguments to `func`.

`Y = splitapply(func,T,G)` splits variables of table `T` into groups and applies `func`. The `splitapply` function treats the variables of `T` as vectors, matrices, or cell arrays, depending on the data types of the table variables. If `T` has `N` variables, then `func` must accept `N` input arguments.

`[Y1,...,YM] = splitapply( ___ )` splits variables into groups and applies `func` to each group. `func` returns multiple output arguments. `Y1,...,YM` contains the concatenated outputs from `func` for the groups split out of the input data variables. `func` can return output arguments that belong to different classes, but the class of each output must be the same each time `func` is called. You can use this syntax with any of the input arguments of the previous syntaxes.

The number of output arguments from `func` need not be the same as the number of input arguments specified by `X1,...,XN`.

Examples

Calculate Mean Values of Groups of Data

Calculate the mean heights by gender for groups of patients and display the results.

Load patient heights and genders from the data file `patients.mat`.

```
load patients
whos Gender Height
```

```
  Name          Size            Bytes  Class     Attributes

  Gender      100x1             12212  cell
  Height      100x1               800  double
```

Specify groups by gender with `findgroups`.

```
G = findgroups(Gender);
```

Split `Height` into groups specified by `G`. Calculate the mean height by gender. The first row of the output argument is the mean height of the female patients, and the second row is the mean height of the male patients.

```
splitapply(@mean,Height,G)
```

```
ans =

   65.1509
   69.2340
```

Split Two Data Variables and Apply Function

Calculate the variances of the differences in blood pressure readings for groups of patients, and display the results. The blood pressure readings are contained in two data variables. To calculate the differences, use a function that takes two input arguments.

Load blood pressure readings and smoking data for 100 patients from the data file `patients.mat`.

```
load patients
whos Systolic Diastolic Smoker
```

```
  Name             Size            Bytes  Class      Attributes

  Diastolic      100x1               800  double
  Smoker         100x1               100  logical
  Systolic       100x1               800  double
```

Define `func` as a function that calculates the variances of the differences between systolic and diastolic blood-pressure readings for smokers and nonsmokers. `func` requires two input arguments.

```
func = @(x,y) var(x-y);
```

Use `findgroups` and `splitapply` to split the patient data into groups and calculate the variances of the differences. `findgroups` also returns group identifiers in `smokers`. The `splitapply` function calls `func` once per group, with `Systolic` and `Diastolic` as the two input arguments.

```
[G,smokers] = findgroups(Smoker);
varBP = splitapply(func,Systolic,Diastolic,G)
```

```
varBP =

   44.4459
   48.6783
```

Create a table that contains the variances of the differences, with the number of patients in each group.

```
numPatients = splitapply(@numel,Smoker,G);
T = table(smokers,numPatients,varBP)
```

```
T = 2×3 table
    smokers    numPatients    varBP
    _______    ___________    ______

    false      66             44.446
    true       34             48.678
```

Return Nonscalar Output for Groups

Calculate the minimum, median, and maximum weights for groups of patients and return these results as arrays for each group. `splitapply` concatenates the output arguments so that you can distinguish output for each group from output for the other groups.

Define a function that returns the minimum, median, and maximum as a row vector.

```
mystats = @(x)[min(x) median(x) max(x)];
```

Load patient weights, genders, and status as smokers from `patients.mat`.

```
load patients
whos Weight Gender Smoker
```

```
  Name          Size            Bytes  Class      Attributes

  Gender      100x1             12212  cell
  Smoker      100x1               100  logical
  Weight      100x1               800  double
```

Use `findgroups` and `splitapply` to split the patient weights into groups and calculate statistics for each group.

```
G = findgroups(Gender,Smoker);
Y = splitapply(mystats,Weight,G)
```

```
Y =

  111.0000  131.0000  147.0000
  115.0000  131.0000  146.0000
  158.0000  181.5000  194.0000
  164.0000  181.0000  202.0000
```

In this example, you can return nonscalar output as row vectors because the data and grouping variables are column vectors. Each row of `Y` contains statistics for a different group of patients.

Split Table Data Variables and Apply Function

Calculate the mean body-mass-index (BMI) from tables of patient data. Group the patients by gender and status as smokers or nonsmokers.

Load patient data and grouping variables into tables.

```
load patients
DT = table(Height,Weight);
GT = table(Gender,Smoker);
```

Define a function that calculates mean BMI from the weights and heights of groups or patients.

```
meanBMIFcn = @(h,w)mean((w ./ (h.^2)) * 703);
```

Create a table that contains the mean BMI for each group.

```
[G,results] = findgroups(GT);
meanBMI = splitapply(meanBMIFcn,DT,G);
results.meanBMI = meanBMI
```

```
results = 4×3 table
     Gender     Smoker    meanBMI
    ________    ______    _______

    'Female'    false     21.672
    'Female'    true      21.669
    'Male'      false     26.578
    'Male'      true      26.458
```

Return Multiple Statistics for Groups

Calculate the minimum, mean, and maximum heights for groups of patients and return results in a table.

Define a function in a file named `multiStats.m` that accepts an input vector and returns the minimum, mean, and maximum values of the vector.

```
% Copyright 2015 The MathWorks, Inc.

function [lo,avg,hi] = multiStats(x)
lo = min(x);
```

```
avg = mean(x);
hi = max(x);
end
```

Load patient data into a table.

```
load patients
T = table(Gender,Height);
summary(T)
```

```
Variables:

    Gender: 100×1 cell array of character vectors

    Height: 100×1 double

        Values:

            Min       60
            Median    67
            Max       72
```

Group patient heights by gender. Create a table that contains the outputs from `multiStats` for each group.

```
[G,gender] = findgroups(T.Gender);
[minHeight,meanHeight,maxHeight] = splitapply(@multiStats,T.Height,G);
result = table(gender,minHeight,meanHeight,maxHeight)
```

```
result =

  2×4 table

     gender     minHeight    meanHeight    maxHeight
    ________    _________    __________    _________

    'Female'    60           65.151        70
    'Male'      66           69.234        72
```

- “Split Table Data Variables and Apply Functions”

- "Split Data into Groups and Calculate Statistics"
- "Calculations on Tables"

Input Arguments

`func` — Function to apply to groups of data

function handle

Function to apply to groups of data, specified as a function handle.

If `func` returns a nonscalar output argument, then the argument must be oriented so that `splitapply` can concatenate the output arguments from successive calls to `func`. For example, if the input data variables are column vectors, then `func` must return either a scalar or a row vector as an output argument.

Example: `Y = splitapply(@sum,X,G)` returns the sums of the groups of data in `X`.

`X` — Data variable

vector | matrix | cell array

Data variable, specified as a vector, matrix, or cell array. The elements of `X` belong to groups specified by the corresponding elements of `G`.

If `X` is a matrix, `splitapply` treats each column or row as a separate data variable. The orientation of `G` determines whether `splitapply` treats the columns or rows of `X` as data variables.

`G` — Group numbers

vector of positive integers

Group numbers, specified as a vector of positive integers.

- If `X` is a vector or cell array, then `G` must be the same length as `X`.
- If `X` is a matrix, then the length of `G` must be equal to the number of columns or rows of `X`, depending on the orientation of `G`.
- If the input argument is table `T`, then `G` must be a column vector. The length of `G` must be equal to the number of rows of `T`.

`T` — Data variables

table

Data variables, specified as a table. `splitapply` treats each table variable as a separate data variable.

Definitions

Split-Apply-Combine Workflow

The *Split-Apply-Combine* workflow is common in data analysis. In this workflow, the analyst splits the data into groups, applies a function to each group, and combines the results. The diagram shows a typical example of the workflow and the parts of the workflow implemented by `findgroups` and `splitapply`.

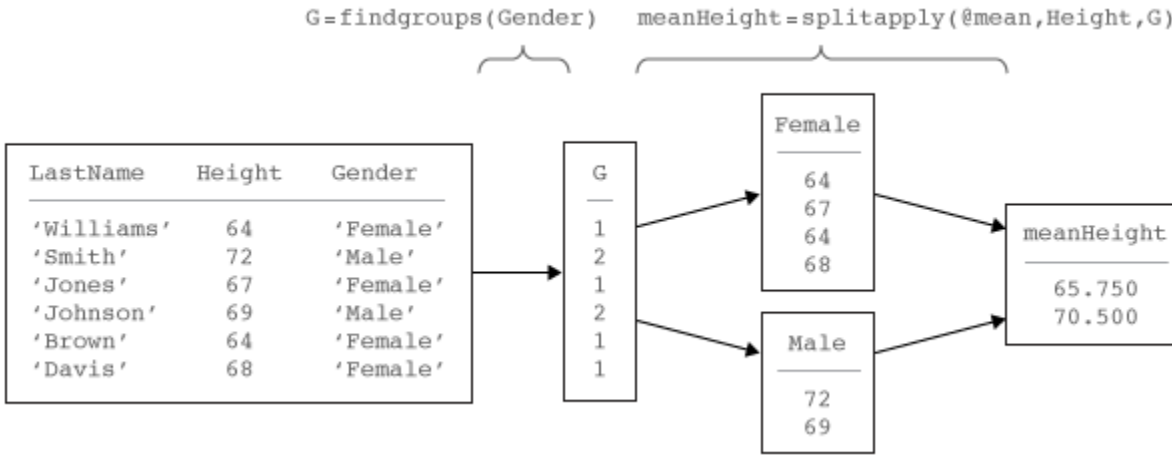

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`arrayfun` | `findgroups` | `rowfun` | `unique` | `varfun`

Topics

"Split Table Data Variables and Apply Functions"
"Split Data into Groups and Calculate Statistics"
"Calculations on Tables"
"Grouping Variables To Split Data"

Introduced in R2015b

spones

Replace nonzero sparse matrix elements with ones

Syntax

```
R = spones(S)
```

Description

`R = spones(S)` generates a matrix `R` with the same sparsity structure as `S`, but with `1`'s in the nonzero positions.

Examples

`c = sum(spones(S))` is the number of nonzeros in each column.

`r = sum(spones(S'))'` is the number of nonzeros in each row.

`sum(c)` and `sum(r)` are equal, and are equal to `nnz(S)`.

See Also

`nnz` | `spalloc` | `spfun`

Introduced before R2006a

spparms

Set parameters for sparse matrix routines

Syntax

```
spparms('key',value)
spparms
values = spparms
[keys,values] = spparms
spparms(values)
value = spparms('key')
spparms('default')
spparms('tight')
```

Description

`spparms('key',value)` sets one or more of the *tunable* parameters used in the sparse routines. In ordinary use, you should never need to deal with this function.

The meanings of the `key` parameters are

`'spumoni'`	Sparse Monitor flag:
`0`	Produces no diagnostic output, the default
`1`	Produces information about choice of algorithm based on matrix structure, and about storage allocation
`2`	Also produces very detailed information about the sparse matrix algorithms
`'thr_rel'`, `'thr_abs'`	Minimum degree threshold is `thr_rel*mindegree + thr_abs`.
`'exact_d'`	Nonzero to use exact degrees in minimum degree. Zero to use approximate degrees.
`'supernd'`	If positive, minimum degree amalgamates the supernodes every `supernd` stages.

`'rreduce'`	If positive, minimum degree does row reduction every `rreduce` stages.
`'wh_frac'`	Rows with `density > wh_frac` are ignored in `colmmd`.
`'autommd'`	Nonzero to use minimum degree (MMD) orderings with QR-based \ and /.
`'autoamd'`	Nonzero to use `colamd` ordering with the LU-based \ and /, and to use `amd` with Cholesky-based \ and /.
`'piv_tol'`	Pivot tolerance used by the LU-based \ and /.
`'bandden'`	Band density used by \ and / for banded matrices. Band density is defined as (# nonzeros in the band)/(# nonzeros in a full band). If `bandden = 1.0`, never use band solver. If `bandden = 0.0`, always use band solver. Default is `0.5`.
`'umfpack'`	Nonzero to use UMFPACK instead of the v4 LU-based solver in \ and /.
`'sym_tol'`	Symmetric pivot tolerance. See `lu` for more information about the role of the symmetric pivot tolerance.

`spparms`, by itself, prints a description of the current settings.

`values = spparms` returns a vector whose components give the current settings.

`[keys,values] = spparms` returns that vector, and also returns a character matrix whose rows are the keywords for the parameters.

`spparms(values)`, with no output argument, sets all the parameters to the values specified by the argument vector.

`value = spparms('key')` returns the current setting of one parameter.

`spparms('default')` sets all the parameters to their default settings.

`spparms('tight')` sets the minimum degree ordering parameters to their *tight* settings, which can lead to orderings with less fill-in, but which make the ordering functions themselves use more execution time.

The key parameters for `default` and `tight` settings are

	Keyword	Default	Tight
`values(1)`	`'spumoni'`	`0.0`	

	Keyword	Default	Tight
values(2)	'thr_rel'	1.1	1.0
values(3)	'thr_abs'	1.0	0.0
values(4)	'exact_d'	0.0	1.0
values(5)	'supernd'	3.0	1.0
values(6)	'rreduce'	3.0	1.0
values(7)	'wh_frac'	0.5	0.5
values(8)	'autommd'	1.0	
values(9)	'autoamd'	1.0	
values(10)	'piv_tol'	0.1	
values(11)	'bandden'	0.5	
values(12)	'umfpack'	1.0	
values(13)	'sym_tol'	0.001	

See Also

chol | lu | qr | colamd | symamd

Introduced before R2006a

sprand

Sparse uniformly distributed random matrix

Syntax

```
R = sprand(S)
R = sprand(m,n,density)
R = sprand(m,n,density,rc)
```

Description

`R = sprand(S)` has the same sparsity structure as `S`, but uniformly distributed random entries.

`R = sprand(m,n,density)` is a random, `m`-by-`n`, sparse matrix with approximately `density*m*n` uniformly distributed nonzero entries (`0 <= density <= 1`).

`R = sprand(m,n,density,rc)` also has reciprocal condition number approximately equal to `rc`. `R` is constructed from a sum of matrices of rank one.

If `rc` is a vector of length `lr`, where `lr <= min(m,n)`, then `R` has `rc` as its first `lr` singular values, all others are zero. In this case, `R` is generated by random plane rotations applied to a diagonal matrix with the given singular values. It has a great deal of topological and algebraic structure.

Tips

- `sprand` uses the same random number generator as `rand`, `randi`, and `randn`. You control this generator with `rng`.

See Also

`sprandn` | `sprandsym`

Introduced before R2006a

sprandn

Sparse normally distributed random matrix

Syntax

```
R = sprandn(S)
R = sprandn(m,n,density)
R = sprandn(m,n,density,rc)
```

Description

`R = sprandn(S)` has the same sparsity structure as `S`, but normally distributed random entries with mean `0` and variance `1`.

`R = sprandn(m,n,density)` is a random, `m`-by-`n`, sparse matrix with approximately `density*m*n` normally distributed nonzero entries (`0 <= density <= 1`).

`R = sprandn(m,n,density,rc)` also has reciprocal condition number approximately equal to `rc`. `R` is constructed from a sum of matrices of rank one.

If `rc` is a vector of length `lr`, where `lr <= min(m,n)`, then `R` has `rc` as its first `lr` singular values, all others are zero. In this case, `R` is generated by random plane rotations applied to a diagonal matrix with the given singular values. It has a great deal of topological and algebraic structure.

Tips

- `sprandn` uses the same random number generator as `rand`, `randi`, and `randn`. You control this generator with `rng`.

See Also

`sprand` | `sprandsym`

Introduced before R2006a

sprandsym

Sparse symmetric random matrix

Syntax

```
R = sprandsym(S)
R = sprandsym(n,density)
R = sprandsym(n,density,rc)
R = sprandsym(n,density,rc,kind)
R = sprandsym(S,[],rc,3)
```

Description

`R = sprandsym(S)` returns a symmetric random matrix whose lower triangle and diagonal have the same structure as `S`. Its elements are normally distributed, with mean `0` and variance `1`.

`R = sprandsym(n,density)` returns a symmetric random, `n`-by-`n`, sparse matrix with approximately `density*n*n` nonzeros; each entry is the sum of one or more normally distributed random samples, and (`0 <= density <= 1`).

`R = sprandsym(n,density,rc)` returns a matrix with a reciprocal condition number equal to `rc`. The distribution of entries is nonuniform; it is roughly symmetric about 0; all are in [−1,1].

If `rc` is a vector of length `n`, then `R` has eigenvalues `rc`. Thus, if `rc` is a positive (nonnegative) vector then `R` is a positive (nonnegative) definite matrix. In either case, `R` is generated by random Jacobi rotations applied to a diagonal matrix with the given eigenvalues or condition number. It has a great deal of topological and algebraic structure.

`R = sprandsym(n,density,rc,kind)` is positive definite.

- If kind = 1, `R` is generated by random Jacobi rotation of a positive definite diagonal matrix. `R` has the desired condition number exactly.
- If kind = 2, `R` is a shifted sum of outer products. `R` has the desired condition number only approximately, but has less structure.

`R = sprandsym(S,[],rc,3)` has the same structure as the matrix `S` and approximate condition number `1/rc`.

Tips

`sprandsym` uses the same random number generator as `rand`, `randi`, and `randn`. You control this generator with `rng`.

See Also

`sprand` | `sprandn`

Introduced before R2006a

sprank

Structural rank

Syntax

```
r = sprank(A)
```

Description

`r = sprank(A)` is the structural rank of the sparse matrix `A`. For all values of `A`,

```
sprank(A) >= rank(full(A))
```

In exact arithmetic, `sprank(A) == rank(full(sprandn(A)))` with a probability of one.

Examples

```
A = [1    0    2    0
     2    0    4    0 ];

A = sparse(A);

sprank(A)

ans =
     2

rank(full(A))

ans =
     1
```

See Also

`dmperm`

Introduced before R2006a

spreadsheetDatastore

Create SpreadsheetDatastore object for collections of spreadsheet data

Syntax

```
ssds = spreadsheetDatastore(location)
ssds = spreadsheetDatastore(location,Name,Value)
```

Description

`ssds = spreadsheetDatastore(location)` creates a datastore from the collection of data specified by `location`. A datastore is a repository for collections of data that are too large to fit in memory. After creating a `SpreadsheetDatstore` object, you can read and process the data in various ways. See SpreadsheetDatastore for more information.

`ssds = spreadsheetDatastore(location,Name,Value)` specifies additional parameters for `ssds` using one or more name-value pair arguments. For example, `spreadsheetDatastore(location,'FileExtentions',{'.xlsx','.xls'})` specifies which files to include in the datastore depending on the file extensions.

Examples

Create SpreadsheetDatastore Object

```
ssds = datastore('airlinesmall_subset.xlsx')
```

```
ssds 

  SpreadsheetDatastore with properties:

                      Files: {
                             ' ...\matlab\toolbox\matlab\demos\airlinesmall_subset.xlsx
                             }
                     Sheets: ''
                      Range: ''

  Sheet Format Properties:
```

```
            NumHeaderLines: 0
         ReadVariableNames: true
             VariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
             VariableTypes: {'double', 'double', 'double' ... and 26 more}

  Properties that control the table returned by preview, read, readall:
      SelectedVariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
      SelectedVariableTypes: {'double', 'double', 'double' ... and 26 more}
                   ReadSize: 'file'
```

Input Arguments

`location` — Files or folders to include in the datastore

character vector | cell array of character vectors

Files or folders to include in the datastore, specified as a character vector or cell array of character vectors. If the files are not in the current folder, then `location` must be full or relative paths. Files within subfolders of the specified folder are not automatically included in the datastore. Files with `.xls`, `.xlsx`, `.xlsm`, `.xltx`, and `.xltm` extensions are supported.

You can use the wildcard character (*) when specifying `location`. This character indicates that all matching files or all files in the matching folders are included in the datastore.

When `location` represents a folder, the datastore includes only supported spreadsheet file formats and ignores any other format.

Example: `'file1.xlsx'`

Example: `'../dir/data/file1.xlsx'`

Example: `{'C:\dir\data\file1.xlsx','C:\dir\data\file2.xlsx'}`

Example: `'C:\dir\data\*.xls'`

Data Types: `char` | `cell`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `ssds = spreadsheetDatastore('C:\dir\spreadsheetdata','FileExtensions',{'.xls','.xlsm'})`

`'IncludeSubfolders'` — Subfolder inclusion flag

`true` or `false` | 0 or 1

Subfolder inclusion flag, specified as the comma-separated pair consisting of `'IncludeSubfolders'` and `true`, `false`, 0, or 1. Specify `true` to include all files and subfolders within each folder or `false` to include only the files within each folder.

If you do not specify `'IncludeSubfolders'`, then the default value is `false`.

Example: `'IncludeSubfolders',true`

Data Types: `logical` | `double`

`'FileExtensions'` — Spreadsheet file extensions

character vector | cell array of character vectors

Spreadsheet file extensions, specified as the comma-separated pair consisting of `'FileExtensions'` and a character vector or cell array of character vectors. The specified extensions do not require a supported format, and you can use the empty quotes `''` to represent files without extensions. If `'FileExtensions'` is not specified, then `spreadsheetDatastore` automatically includes all files with `.xls`, `.xlsx`, `.xlsm`, `.xltx`, and `.xltm` extensions in the specified path. If you want to include extensions that are not supported, specify all extensions.

Example: `'FileExtensions','.xls'`

Example: `'FileExtensions',{'.xlsx','.xlsm'}`

Data Types: `char` | `cell`

`'TextType'` — Output data type of text variables

`'char'` (default) | `'string'`

Output data type of text variables, specified as the comma-separated pair consisting of `'TextType'` and either `'char'` or `'string'`. If the output table from the `read`, `readall`, or `preview` functions contains text variables, then `'TextType'` specifies the data type of those variables. If `'TextType'` is `'char'`, then the output is a cell array of character vectors. If `'TextType'` is `'string'`, then the output has type `string`.

Data Types: `char`

In addition to these name-value pairs, you also can specify any of the properties on the SpreadsheetDatastore Properties page as name-value pairs, except for the `Files` property.

Output Arguments

`ssds` — Spreadsheet datastore
`SpreadsheetDatastore` object

Datastore for a spreadsheet file collection, returned as a `SpreadsheetDatastore` object. The `Files` property is a cell array of character vectors, where each character vector is an absolute path to a file resolved from the `location` argument. See SpreadsheetDatastore Properties for more information.

See Also

See Also
`datastore` | `mapreduce` | `tall`

Topics
"Getting Started with Datastore"

Introduced in R2016a

SpreadsheetDatastore Properties

Access and modify `SpreadsheetDatastore` properties

Description

`SpreadsheetDatastore` properties describe the format of the files in a `SpreadsheetDatastore` object, and control how data is read. By changing property values, you can modify certain aspects of the datastore. Use dot notation to view or modify a particular property of a `SpreadsheetDatastore` object. To create a `SpreadsheetDatastore` object, you can use the `spreadsheetDatastore` function or the `datastore` function.

File Properties

`Files` — Files included in datastore
cell array of character vectors

Files included in the datastore, resolved as a cell array of character vectors, where each character vector is a full path to a file. The `location` argument in the `spreadsheetDatastore` and `datastore` functions define these files.

The first file specified in the cell array determines the variable names and format information for all files in the datastore.

Example: `{'C:\dir\data\file1.xls';'C:\dir\data\file2.xls'}`

Data Types: `cell`

`NumHeaderLines` — Number of lines to skip
`0` (default) | positive integer

Number of lines to skip at the beginning of each sheet when reading, specified as a positive integer. When you also specify the `Range` property, `NumHeaderLines` is the number of lines to skip at the beginning of the specified block of data.

Data Types: `double`

`Sheets` — Sheets in files
`''` (default) | character vector | cell array of character vectors | numeric vector

Sheets in files, specified as a character vector or cell array of character vectors containing sheet names, or as a numeric vector of sheet indices. The empty character vector `''` indicates that all sheets in the files are included.

Example: `{'sheet1','sheet7'}`

Example: `[3 5 7]`

Data Types: `char` | `cell` | `double`

`Range` — Row and column bounds

`''` (default) | character vector

Row and column bounds, specified as a character vector that defines a rectangular block of data in the sheets. The empty character vector `''` indicates that the bounds are the beginning of the file and the end of the data.

Example: `'B1:T7'`

Example: `'A:C'`

Data Types: `char`

`ReadVariableNames` — Indicator for reading variable names

`true` (default) | `false` | `1` | `0`

Indicator for reading the first row of the first file in the datastore as variable names, specified as either `true` (1) or `false` (0).

- If `true`, then the first nonheader row of the first file determines the variable names for the data.
- If `false`, then the first nonheader row of the first file contains the first row of data. Default variable names are assigned as `Var1`, `Var2`, and so on.

Data Types: `logical` | `double`

`VariableNames` — Names of variables

character vector | cell array of character vectors

Names of variables in the datastore, specified as a character vector or cell array of character vectors. Specify the variable names in the order in which they appear in the files. If you do not specify the variable names, they are detected from the first nonheader line in the first file of the datastore. You can specify `VariableNames` with a character vector, however it is automatically converted to a cell array of character vectors. When

modifying the `VariableNames` property, the number of new variable names must match the number of original variable names.

If `ReadVariableNames` is `false`, then `VariableNames` defaults to `{'Var1','Var2', ...}`.

Example: `{'Time','Date','Quantity'}`

Data Types: `char` | `cell`

`VariableTypes` — Variable types
`'double'` | `'char'` | `'string'` | `'categorical'` | `'datetime'`

Variable types, specified as one of `'double'`, `'char'`, `'string'`, `'categorical'`, or `'datetime'`, which indicates the type of each variable when reading the data. The list of variable types corresponds with the variables in `VariableNames`. Types `double`, `char`, and `datetime` can be automatically detected from the data. You can specify `VariableTypes` as a character vector, however it is automatically converted to a cell array of character vectors.

Example: `{'char','categorical'}`

Data Types: `char` | `cell`

Properties for `preview`, `read`, `readall` Table

`SelectedVariableNames` — Variables to read
character vector | cell array of character vectors

Variables to read from the file, specified as a character vector or cell array of character vectors. Each character vector contains the name of one variable. You can specify the variable names in any order. You can specify `SelectedVariableNames` with a character vector, however it is automatically converted to a cell array of character vectors.

Example: `{'Var3','Var7','Var4'}`

Data Types: `char` | `cell`

`SelectedVariableTypes` — Selected variable types
`'double'` | `'char'` | `'string'` | `'categorical'` | `'datetime'`

Selected variable types, specified as one of `'double'`, `'char'`, `'string'`, `'categorical'`, or `'datetime'`, which indicates the type of each selected variable

when reading the data. The list of variable types corresponds with the variables in `SelectedVariableNames`. Types `double`, `char`, and `datetime` can be automatically detected from the data. You can specify `SelectedVariableTypes` as a character vector, however it is automatically converted to a cell array of character vectors.

Example: `{'double','datetime'}`

Data Types: `char` | `cell`

`ReadSize` — Amount of data to read

`'file'` (default) | `'sheet'` | positive integer scalar

Amount of data to read in a call to the `read` function, specified as one of `'file'` or `'sheet'`, or as a positive integer scalar.

- If `ReadSize` is `'file'`, then each call to `read` reads all the data one file at a time.
- If `ReadSize` is `'sheet'`, then each call to `read` reads all the data one sheet at a time.
- If `ReadSize` is a positive integer, then each call to `read` reads `ReadSize` rows, or fewer if it reaches the end of the data.

When you change `ReadSize` from an integer scalar to `'file'` or `'sheet'`, or conversely, the datastore resets using the `reset` function.

Data Types: `char` | `double`

See Also

See Also

`datastore` | `spreadsheetDatastore`

spring

Spring colormap array

Syntax

```
c = spring
c = spring(m)
```

Description

`c = spring` returns the spring colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = spring(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the spring colormap.

```
surf(peaks);
colormap('spring');
```

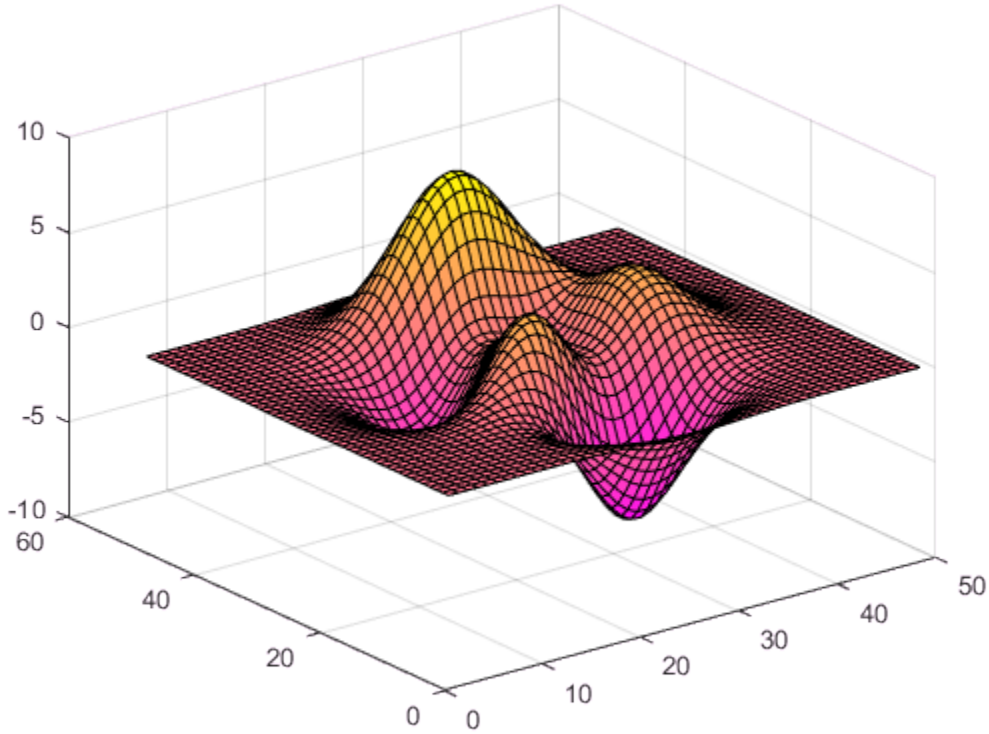

Get the spring colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = spring;
c = flipud(c);
colormap(c);
```

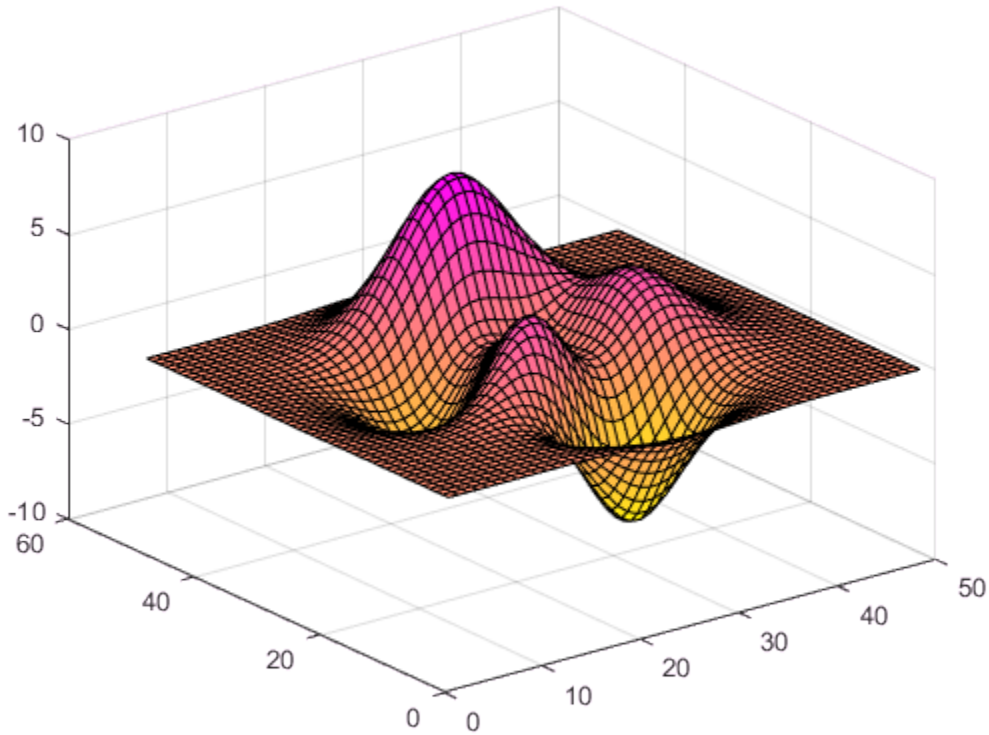

Downsample the Spring Colormap

Get a downsampled version of the spring colormap containing only ten colors. Then display the contours of the peaks function by applying the colormap and interpolated shading.

```
c = spring(10);
surf(peaks);
colormap(c);
shading interp;
```

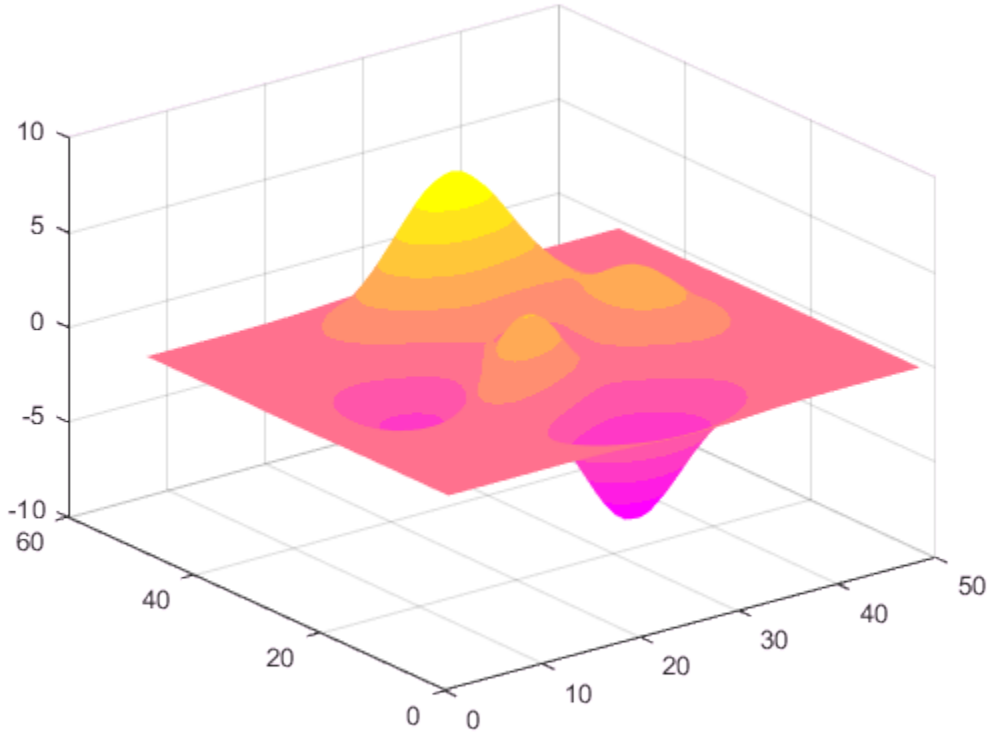

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

sprintf

Format data into string

Syntax

```
str = sprintf(formatSpec,A1,...,An)
[str,errmsg] = sprintf(formatSpec,A1,...,An)
```

Description

`str = sprintf(formatSpec,A1,...,An)` formats the data in arrays `A1,...,An` according to `formatSpec` in column order, and returns the results to `str`.

`[str,errmsg] = sprintf(formatSpec,A1,...,An)` returns an error message as a character vector when the operation is unsuccessful. Otherwise, `errmsg` is empty.

Examples

Floating-Point Formats

Format a floating-point number using `%e`, `%f`, and `%g` specifiers.

```
A = 1/eps;
str_e = sprintf('%0.5e',A)
```

```
str_e =
'4.50360e+15'
```

```
str_f = sprintf('%0.5f',A)
```

```
str_f =
'4503599627370496.00000'
```

```
str_g = sprintf('%0.5g',A)
```

```
str_g =
'4.5036e+15'
```

Literal Text and Array Inputs

Combine literal text with array values to create a character vector.

```
formatSpec = 'The array is %dx%d.';
A1 = 2;
A2 = 3;
str = sprintf(formatSpec,A1,A2)
```

```
str =
'The array is 2x3.'
```

Specify Formatted Text as String Array

To return formatted text as a string, specify `formatSpec` as a string instead of a character vector when you call the `sprintf` function.

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Convert data and return the result as a string.

```
formatSpec = "The current time is: %d:%d %s";
A1 = 11;
A2 = 20;
A3 = 'a.m.';
str = sprintf(formatSpec,A1,A2,A3)
```

```
str =
"The current time is: 11:20 a.m."
```

Convert input string. Input arrays that contain text either can be character vectors or strings.

```
A1 = 2;
A2 = 35;
A3 = "p.m.";
str = sprintf(formatSpec,A1,A2,A3)
```

```
str =
"The current time is: 2:35 p.m."
```

Integer Format with Floating-Point Inputs

Explicitly convert double-precision values to integers.

```
str = sprintf('%d',round(pi))
```

```
str =
'3'
```

Specify Field Width of a Printed Value

Specify the minimum width of the printed value.

```
str = sprintf('%025d',[123456])
```

```
str =
'0000000000000000000123456'
```

The `0` flag in the `%025d` format specifier requests leading zeros in the output.

Reorder Inputs Using Position Identifier (n$)

Reorder the input values using the `n$` position identifier.

```
A1 = 'X';
A2 = 'Y';
A3 = 'Z';
formatSpec = ' %3$s %2$s %1$s';
str = sprintf(formatSpec,A1,A2,A3)
```

```
str =
' Z Y X'
```

Create Character Vector from Values in Cell Array

```
C = { 1,   2,   3 ;
     'AA','BB','CC'};

str = sprintf(' %d %s',C{:})
```

```
str =
' 1 AA 2 BB 3 CC'
```

The syntax `C{:}` creates a comma-separated list of arrays that contain the contents of each cell from `C` in column order. For example, `C{1}==1` and `C{2}=='AA'`.

Input Arguments

`formatSpec` — Format of output fields

formatting operators

Format of the output fields, specified using formatting operators. `formatSpec` also can include ordinary text and special characters.

`formatSpec` can be a character vector in single quotes, or, starting in R2016b, a string scalar.

Formatting Operator

A formatting operator starts with a percent sign, `%`, and ends with a conversion character. The conversion character is required. Optionally, you can specify identifier, flags, field width, precision, and subtype operators between `%` and the conversion character. (Spaces are invalid between operators and are shown here only for readability).

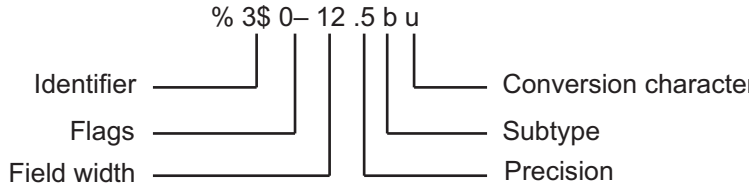

Conversion Character

This table shows conversion characters to format numeric and character data as text.

Value Type	Conversion	Details
Integer, signed	`%d` or `%i`	Base 10
Integer, unsigned	`%u`	Base 10
	`%o`	Base 8 (octal)
	`%x`	Base 16 (hexadecimal), lowercase letters `a`–`f`
	`%X`	Same as `%x`, uppercase letters `A`–`F`

Value Type	Conversion	Details
Floating-point number	`%f`	Fixed-point notation (Use a precision operator to specify the number of digits after the decimal point.)
	`%e`	Exponential notation, such as `3.141593e+00` (Use a precision operator to specify the number of digits after the decimal point.)
	`%E`	Same as `%e`, but uppercase, such as `3.141593E+00` (Use a precision operator to specify the number of digits after the decimal point.)
	`%g`	The more compact of `%e` or `%f`, with no trailing zeros (Use a precision operator to specify the number of significant digits.)
	`%G`	The more compact of `%E` or `%f`, with no trailing zeros (Use a precision operator to specify the number of significant digits.)
Characters or strings	`%c`	Single character
	`%s`	Character vector or string array. The type of the output text is the same as the type of `formatSpec`.

Optional Operators

The optional identifier, flags, field width, precision, and subtype operators further define the format of the output text.

- **Identifier**

  Order for processing the function input arguments. Use the syntax *n*$, where *n* represents the positions of the other input arguments in the function call.

  Example: `('%3$s %2$s %1$s %2$s','A','B','C')` prints input arguments `'A'`, `'B'`, `'C'` as follows: `C B A B`.

  Note: If an input argument is an array, you cannot use identifiers to specify particular array elements from that input argument.

- **Flags**

`'–'`	Left-justify. **Example:** `%-5.2f` **Example:** `%-10s`
`'+'`	Always print a sign character (+ or –) for any numeric value. **Example:** `%+5.2f` Right-justify text. **Example:** `%+10s`
`' '`	Insert a space before the value. **Example:** `% 5.2f`
`'0'`	Pad to field width with zeros before the value. **Example:** `%05.2f`
`'#'`	Modify selected numeric conversions: • For `%o`, `%x`, or `%X`, print `0`, `0x`, or `0X` prefix. • For `%f`, `%e`, or `%E`, print decimal point even when precision is 0. • For `%g` or `%G`, do not remove trailing zeros or decimal point. **Example:** `%#5.0f`

- **Field Width**

  Minimum number of characters to print. The field width operator can be a number, or an asterisk (`*`) to refer to an input argument.

  Example: The input arguments `('%12d',intmax)` are equivalent to `('%*d', 12, intmax)`.

  The function pads to field width with spaces before the value unless otherwise specified by flags.

- **Precision**

For `%f`, `%e`, or `%E`	Number of digits to the right of the decimal point **Example:** `'%.4f'` prints `pi` as `'3.1416'`
For `%g` or `%G`	Number of significant digits **Example:** `'%.4g'` prints `pi` as `' 3.142'`

The precision operator can be a number, or an asterisk (`*`) to refer to an argument.

Example: The input arguments `('%6.4f', pi)` are equivalent to `('%*.*f', 6, 4, pi)`.

Note: If you specify a precision operator for floating-point values that exceeds the precision of the input numeric data type, the results might not match the input values to the precision you specified. The result depends on your computer hardware and operating system.

- **Subtypes**

  You can use a subtype operator to print a floating-point value as its octal, decimal, or hexadecimal value. The subtype operator immediately precedes the conversion character. This table shows the conversions that can use subtypes.

Input Value Type	Subtype and Conversion Character	Output Value Type

Floating-point number	`%bx` or `%bX`
	`%bo`
	`%bu`
		Double-precision hexadecimal, octal, or decimal value
		Example: `%bx` prints `pi` as `400921fb54442d18`

	`%tx` or `%tX`
	`%to`
	`%tu`
		Single-precision hexadecimal, octal, or decimal value
		Example: `%tx` prints `pi` as `40490fdb`

Text Before or After Formatting Operators

`formatSpec` can also include additional text before a percent sign, `%`, or after a conversion character. The text can be:

- Ordinary text to print.
- Special characters that you cannot enter as ordinary text. This table shows how to represent special characters in `formatSpec`.

Special Character	Representation
Single quotation mark	`''`
Percent character	`%%`
Backslash	`\\`
Alarm	`\a`
Backspace	`\b`
Form feed	`\f`
New line	`\n`
Carriage return	`\r`
Horizontal tab	`\t`
Vertical tab	`\v`
Character whose Unicode numeric value can be represented by the hexadecimal number, `N`	`\xN` **Example:** `sprintf('\x5A')` returns `'Z'`
Character whose Unicode numeric value can be represented by the octal number, `N`	`\N` **Example:** `sprintf('\132')` returns `'Z'`

Notable Behavior of Conversions with Formatting Operators

- Numeric conversions print only the real component of complex numbers.
- If you specify a conversion that does not fit the data, such as a text conversion for a numeric value, MATLAB overrides the specified conversion, and uses `%e`.

  Example: `'%s'` converts `pi` to `3.141593e+00`.
- If you apply a text conversion (either `%c` or `%s`) to integer values, MATLAB converts values that correspond to valid character codes to characters.

  Example: `'%s'` converts `[65 66 67]` to `ABC`.

Data Types: `char` | `string`

A1, . . . , An — Numeric, character, or string arrays
arrays

Numeric, character, or string arrays.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string`

Output Arguments

str — Formatted text
character vector | string scalar

Formatted text, returned as a character vector or a string scalar. The type of output matches the type of `formatSpec`.

errmsg — Error message
character vector

Error message, returned as a character vector, when the operation is unsuccessful. Otherwise, `errmsg` is empty.

Tips

- The `sprintf` function is similar to `fprintf`, but `fprintf` prints to a file or to the Command Window.
- Format specifiers for the reading functions `sscanf` and `fscanf` differ from the formats for the writing functions `sprintf` and `fprintf`. The reading functions do not support a precision field. The width field specifies a minimum for writing, but a maximum for reading.

References

[1] Kernighan, B. W., and D. M. Ritchie, *The C Programming Language*, Second Edition, Prentice-Hall, Inc., 1988.

[2] ANSI specification X3.159-1989: “Programming Language C,” ANSI, 1430 Broadway, New York, NY 10018.

See Also

See Also

`char` | `compose` | `fprintf` | `fscanf` | `int2str` | `num2str` | `sscanf`

Topics

"Formatting Text"

Introduced before R2006a

spy

Visualize sparsity pattern

Syntax

```
spy(S)
spy(S,markersize)
spy(S,'LineSpec')
spy(S,'LineSpec',markersize)
```

Description

`spy(S)` plots the sparsity pattern of any matrix `S`.

`spy(S,markersize)`, where `markersize` is an integer, plots the sparsity pattern using markers of the specified point size.

`spy(S,'LineSpec')`, where `LineSpec` is a character vector, uses the specified plot marker type and color.

`spy(S,'LineSpec',markersize)` uses the specified type, color, and size for the plot markers.

`S` is usually a sparse matrix, but full matrices are acceptable, in which case the locations of the nonzero elements are plotted.

Note `spy` replaces `format +`, which takes much more space to display essentially the same information.

Examples

Plot Sparsity Pattern

This example plots the 60-by-60 sparse adjacency matrix of the connectivity graph of the Buckminster Fuller geodesic dome. This matrix also represents the soccer ball and the carbon-60 molecule.

```
B = bucky;
spy(B)
```

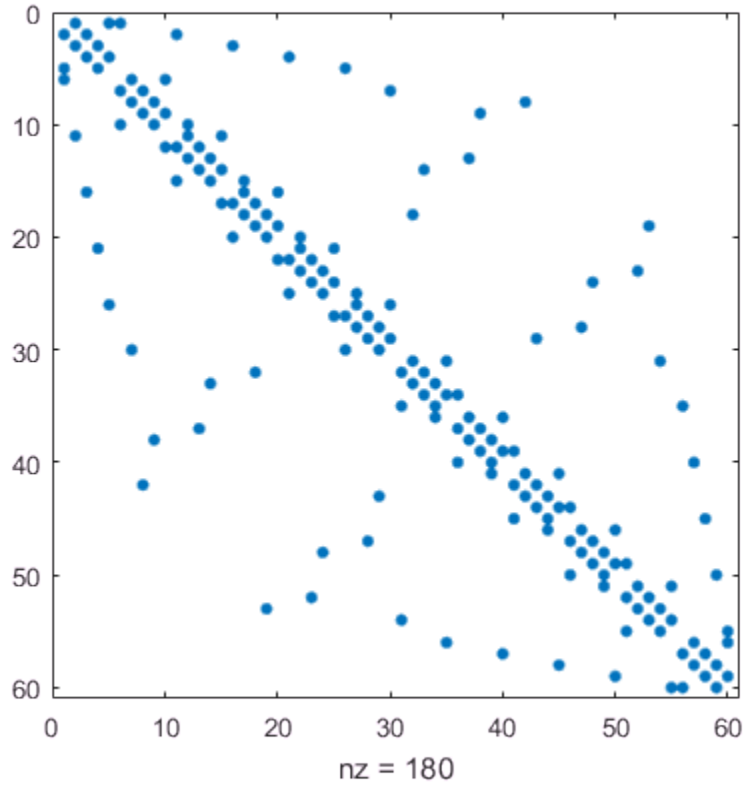

See Also

`find` | `gplot` | `LineSpec` | `symamd` | `symrcm`

Introduced before R2006a

sqrt

Square root

Syntax

```
B = sqrt(X)
```

Description

`B = sqrt(X)` returns the square root of each element of the array `X`. For the elements of `X` that are negative or complex, `sqrt(X)` produces complex results.

The `sqrt` function's domain includes negative and complex numbers, which can lead to unexpected results if used unintentionally. For negative and complex numbers `z = u + i*w`, the complex square root `sqrt(z)` returns

```
sqrt(r)*(cos(phi/2) + 1i*sin(phi/2))
```

where `r = abs(z)` is the radius and `phi = angle(z)` is the phase angle on the closed interval `-pi <= phi <= pi`.

If you want negative and complex numbers to return error messages rather than return complex results, use `realsqrt` instead.

Examples

Square Root of Vector Elements

Create a row vector containing both negative and positive values.

```
X = -2:2
```

```
X =

    -2    -1     0     1     2
```

Compute the square root of each element of `X`.

```
Y = sqrt(X)
```

```
Y =
   0.0000 + 1.4142i   0.0000 + 1.0000i   0.0000 + 0.0000i   1.0000 + 0.0000i   1.4142 -
```

Input Arguments

X — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a numeric scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Tips

See `sqrtm` for the matrix square root.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Simulation produces an error. Generated standalone code returns `NaN` when the input value `x` is real, but the output should be complex. To get the complex result, make the input value complex by passing in `complex(x)`.

See Also

See Also

`nthroot` | `realsqrt` | `sqrtm`

Introduced before R2006a

sqrtm

Matrix square root

Syntax

```
X = sqrtm(A)
[X,residual] = sqrtm(A)
[X,alpha,condx] = sqrtm(A)
```

Description

`X = sqrtm(A)` returns the principal square root of the matrix `A`, that is, `X*X = A`.

`X` is the unique square root for which every eigenvalue has nonnegative real part. If `A` has any eigenvalues with negative real parts, then a complex result is produced. If `A` is singular, then `A` might not have a square root. If exact singularity is detected, a warning is printed.

`[X,residual] = sqrtm(A)` also returns the residual, `residual = norm(A-X^2,1)/norm(A,1)`. This syntax does not print warnings if exact singularity is detected.

`[X,alpha,condx] = sqrtm(A)` returns stability factor `alpha` and an estimate of the matrix square root condition number of `X` in 1-norm, `condx`. The residual `norm(A-X^2,1)/norm(A,1)` is bounded approximately by `n*alpha*eps` and the 1-norm relative error in `X` is bounded approximately by `n*alpha*condx*eps`, where `n = max(size(A))`.

Examples

Matrix Squareroot of Difference Operator

Create a matrix representation of the fourth difference operator, `A`. This matrix is symmetric and positive definite.

```
A = [5 -4 1 0 0; -4 6 -4 1 0; 1 -4 6 -4 1; 0 1 -4 6 -4; 0 0 1 -4 6]
```

```
A =
```

```
     5    -4     1     0     0
    -4     6    -4     1     0
     1    -4     6    -4     1
     0     1    -4     6    -4
     0     0     1    -4     6
```

Calculate the unique positive definite square root of A using `sqrtm`. X is the matrix representation of the second difference operator.

```
X = round(sqrtm(A))
```

```
X =

     2    -1     0     0     0
    -1     2    -1     0     0
     0    -1     2    -1     0
     0     0    -1     2    -1
     0     0     0    -1     2
```

Matrix with Multiple Squareroots

Consider a matrix that has four squareroots, A.

$$A = \begin{bmatrix} 7 & 10 \\ 15 & 22 \end{bmatrix}$$

Two of the squareroots of A are given by Y1 and Y2:

$$Y_1 = \begin{bmatrix} 1.5667 & 1.7408 \\ 2.6112 & 4.1779 \end{bmatrix}$$

$$Y_2 = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$$

Confirm that Y1 and Y2 are squareroots of matrix A.

```
A = [7 10; 15 22];
Y1 = [1.5667 1.7408; 2.6112 4.1779];
A - Y1*Y1
```

```
ans =

   1.0e-03 *

   -0.1258   -0.1997
   -0.2995   -0.4254
```

```
Y2 = [1 2; 3 4];
A - Y2*Y2
```

```
ans =

     0     0
     0     0
```

The other two squareroots of `A` are `-Y1` and `-Y2`. All four of these roots can be obtained from the eigenvalues and eigenvectors of `A`. If `[V,D] = eig(A)`, then the squareroots have the general form `Y = V*S/V`, where `D = S*S` and `S` has four choices of sign to produce four different values of `Y`:

$$S = \begin{bmatrix} \pm 0.3723 & 0 \\ 0 & \pm 5.3723 \end{bmatrix}$$

Calculate the squareroot of `A` with `sqrtm`. The `sqrtm` function chooses the positive square roots and produces `Y1`, even though `Y2` seems to be a more natural result.

```
Y = sqrtm(A)
```

```
Y =

    1.5667    1.7408
    2.6112    4.1779
```

Input Arguments

A — Input matrix

square matrix

Input matrix, specified as a square matrix.

Data Types: `single` | `double`
Complex Number Support: Yes

Tips

- Some matrices, like `A = [0 1; 0 0]`, do not have any square roots, real or complex, and `sqrtm` cannot be expected to produce one.

Algorithms

The algorithm `sqrtm` uses is described in [3].

References

[1] N.J. Higham, "Computing real square roots of a real matrix," *Linear Algebra and Appl.*, 88/89, pp. 405–430, 1987

[2] Bjorck, A. and S. Hammerling, "A Schur method for the square root of a matrix," *Linear Algebra and Appl.*, 52/53, pp. 127–140, 1983

[3] Deadman, E., Higham, N. J. and R. Ralha, "Blocked Schur algorithms for computing the matrix square root," *Lecture Notes in Comput. Sci.*, 7782, Springer-Verlag, pp. 171–182, 2013

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`expm` | `funm` | `logm`

Introduced before R2006a

squeeze

Remove singleton dimensions

Syntax

```
B = squeeze(A)
```

Description

`B = squeeze(A)` returns an array `B` with the same elements as `A`, but with all singleton dimensions removed. A singleton dimension is any dimension for which `size(A,dim) = 1`. Two-dimensional arrays are unaffected by `squeeze`; if `A` is a row or column vector or a scalar (1-by-1) value, then `B = A`.

Examples

Remove Singleton Dimension from Array

Create a 2-by-1-by-3 array and remove the singleton column dimension to form a 2-by-3 matrix.

```
y = rand(2,1,3)
```

```
y =

(:,:,1) =

    0.8147
    0.9058


(:,:,2) =

    0.1270
    0.9134
```

```
(:,:,3) =

    0.6324
    0.0975


z = squeeze(y)

z =

    0.8147    0.1270    0.6324
    0.9058    0.9134    0.0975
```

Create Vector from Array with Singleton Dimensions

Create a 1-by-1-by-5 array of ones.

```
mat = repmat(1,[1,1,5])

mat =

(:,:,1) =

     1


(:,:,2) =

     1


(:,:,3) =

     1


(:,:,4) =

     1


(:,:,5) =
```

```
     1
```

Condense the data in the third dimension to create a 5-by-1 column vector.

```
squeeze(mat)
```

```
ans =

     1
     1
     1
     1
     1
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Does not support cell arrays.

See Also

`reshape` | `shiftdim` | `permute`

Introduced before R2006a

ss2tf

Convert state-space representation to transfer function

Syntax

```
[b,a] = ss2tf(A,B,C,D)
[b,a] = ss2tf(A,B,C,D,ni)
```

Description

`[b,a] = ss2tf(A,B,C,D)` converts a state-space representation of a system into an equivalent transfer function. `ss2tf` returns the Laplace-transform transfer function for continuous-time systems and the Z-transform transfer function for discrete-time systems.

`[b,a] = ss2tf(A,B,C,D,ni)` returns the transfer function that results when the `ni`th input of a system with multiple inputs is excited by a unit impulse.

Examples

Mass-Spring System

A one-dimensional discrete-time oscillating system consists of a unit mass, m, attached to a wall by a spring of unit elastic constant. A sensor samples the acceleration, a, of the mass at $F_s = 5$ Hz.

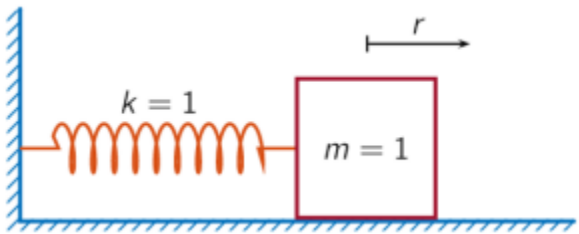

Generate 50 time samples. Define the sampling interval $\Delta t = 1/F_s$.

```
Fs = 5;
dt = 1/Fs;
N = 50;
t = dt*(0:N-1);
```

The oscillator can be described by the state-space equations

$$x(k+1) = Ax(k) + Bu(k),$$
$$y(k) = Cx(k) + Du(k),$$

where $x = \begin{pmatrix} r & v \end{pmatrix}^T$ is the state vector, r and v are respectively the position and velocity of the mass, and the matrices

$$A = \begin{pmatrix} \cos\Delta t & \sin\Delta t \\ -\sin\Delta t & \cos\Delta t \end{pmatrix}, \quad B = \begin{pmatrix} 1-\cos\Delta t \\ \sin\Delta t \end{pmatrix}, \quad C = \begin{pmatrix} -1 & 0 \end{pmatrix}, \quad D = \begin{pmatrix} 1 \end{pmatrix}.$$

```
A = [cos(dt) sin(dt);-sin(dt) cos(dt)];
B = [1-cos(dt);sin(dt)];
C = [-1 0];
D = 1;
```

The system is excited with a unit impulse in the positive direction. Use the state-space model to compute the time evolution of the system starting from an all-zero initial state.

```
u = [1 zeros(1,N-1)];

x = [0;0];
for k = 1:N
    y(k) = C*x + D*u(k);
    x = A*x + B*u(k);
end
```

Plot the acceleration of the mass as a function of time.

```
stem(t,y,'filled')
xlabel('t')
```

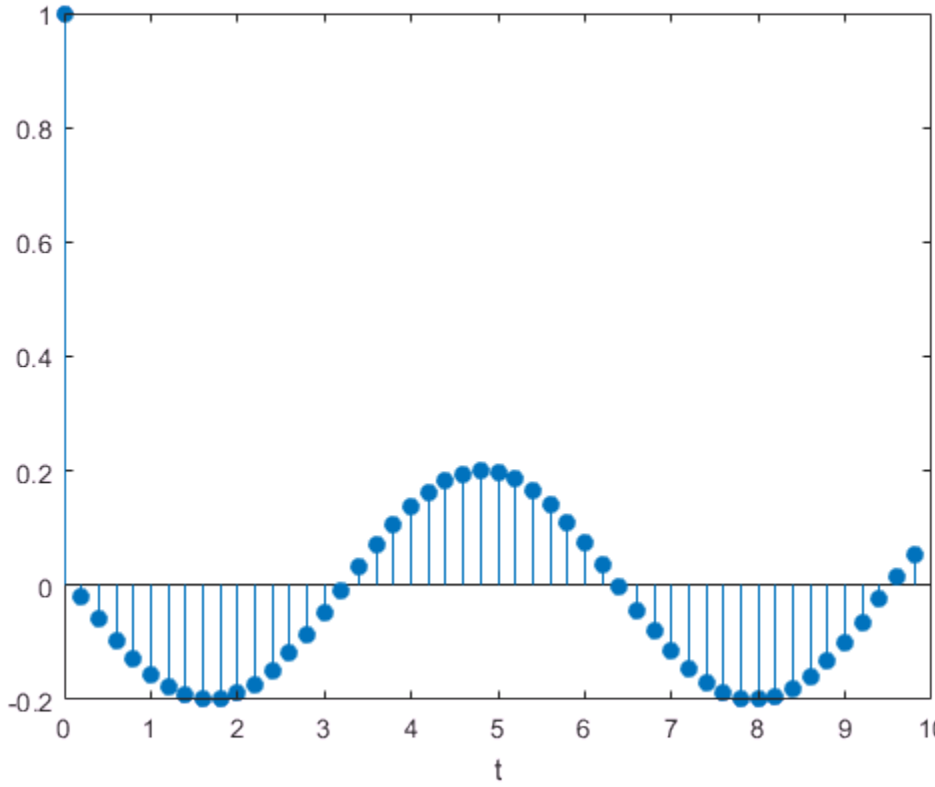

Compute the time-dependent acceleration using the transfer function $H(z)$ to filter the input. Plot the result.

```
[b,a] = ss2tf(A,B,C,D);
yt = filter(b,a,u);
stem(t,yt,'filled')
xlabel('t')
```

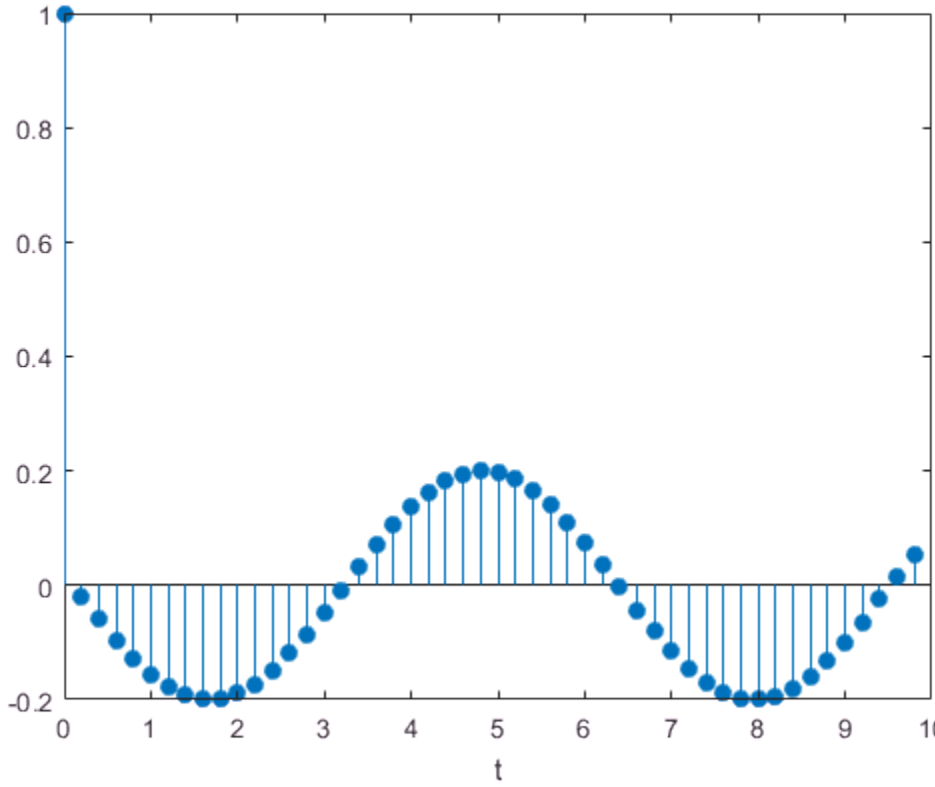

The transfer function of the system has an analytic expression:

$$H(z) = \frac{1 - z^{-1}(1 + \cos \Delta t) + z^{-2} \cos \Delta t}{1 - 2z^{-1} \cos \Delta t + z^{-2}}.$$

Use the expression to filter the input. Plot the response.

```
bf = [1 -(1+cos(dt)) cos(dt)];
af = [1 -2*cos(dt) 1];
yf = filter(bf,af,u);
stem(t,yf,'filled')
xlabel('t')
```

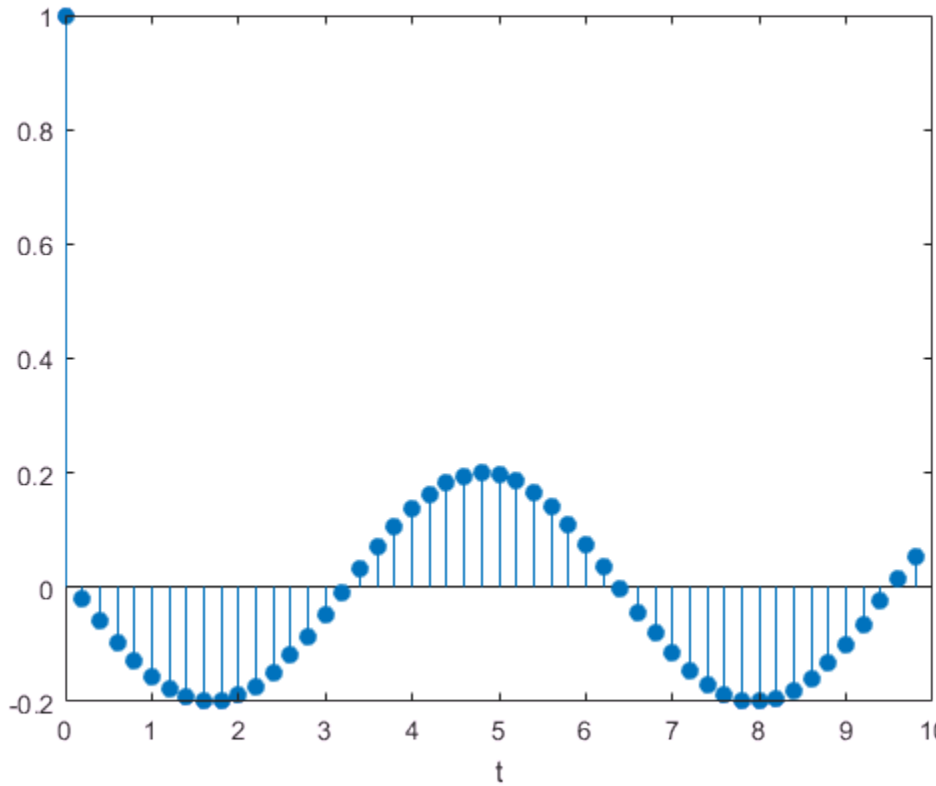

The result is the same in all three cases.

Two-Body Oscillator

An ideal one-dimensional oscillating system consists of two unit masses, m_1 and m_2, confined between two walls. Each mass is attached to the nearest wall by a spring of unit elastic constant. Another such spring connects the two masses. Sensors sample a_1 and a_2, the accelerations of the masses, at $F_s = 16$ Hz.

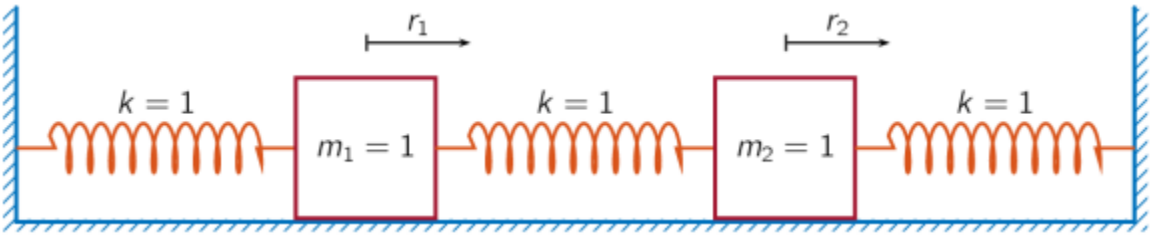

Specify a total measurement time of 16 s. Define the sampling interval $\Delta t = 1/F_s$.

```
Fs = 16;
dt = 1/Fs;
N = 257;
t = dt*(0:N-1);
```

The system can be described by the state-space model

$$\begin{aligned} x(n+1) &= Ax(n) + Bu(n), \\ y(n) &= Cx(n) + Du(n), \end{aligned}$$

where $x = \begin{pmatrix} r_1 & v_1 & r_2 & v_2 \end{pmatrix}^T$ is the state vector and r_i and v_i are respectively the location and the velocity of the i-th mass. The input vector $u = \begin{pmatrix} u_1 & u_2 \end{pmatrix}^T$ and the output vector $y = \begin{pmatrix} a_1 & a_2 \end{pmatrix}^T$. The state-space matrices are

$$A = \exp(A_c \Delta t), \quad B = A_c^{-1}(A - I)B_c, \quad C = \begin{pmatrix} -2 & 0 & 1 & 0 \\ 1 & 0 & -2 & 0 \end{pmatrix}, \quad D = I,$$

the continuous-time state-space matrices are

$$A_c = \begin{pmatrix} 0 & 1 & 0 & 0 \\ -2 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \\ 1 & 0 & -2 & 0 \end{pmatrix}, \quad B_c = \begin{pmatrix} 0 & 0 \\ 1 & 0 \\ 0 & 0 \\ 0 & 1 \end{pmatrix},$$

and I denotes an identity matrix of the appropriate size.

```
Ac = [0 1 0 0;-2 0 1 0;0 0 0 1;1 0 -2 0];
A = expm(Ac*dt);
Bc = [0 0;1 0;0 0;0 1];
B = Ac\(A-eye(4))*Bc;
C = [-2 0 1 0;1 0 -2 0];
D = eye(2);
```

The first mass, m_1, receives a unit impulse in the positive direction.

```
ux = [1 zeros(1,N-1)];
u0 = zeros(1,N);
u = [ux;u0];
```

Use the model to compute the time evolution of the system starting from an all-zero initial state.

```
x = [0;0;0;0];
for k = 1:N
    y(:,k) = C*x + D*u(:,k);
    x = A*x + B*u(:,k);
end
```

Plot the accelerations of the two masses as functions of time.

```
stem(t,y','.')
xlabel('t')
legend('a_1','a_2')
title('Mass 1 Excited')
grid
```

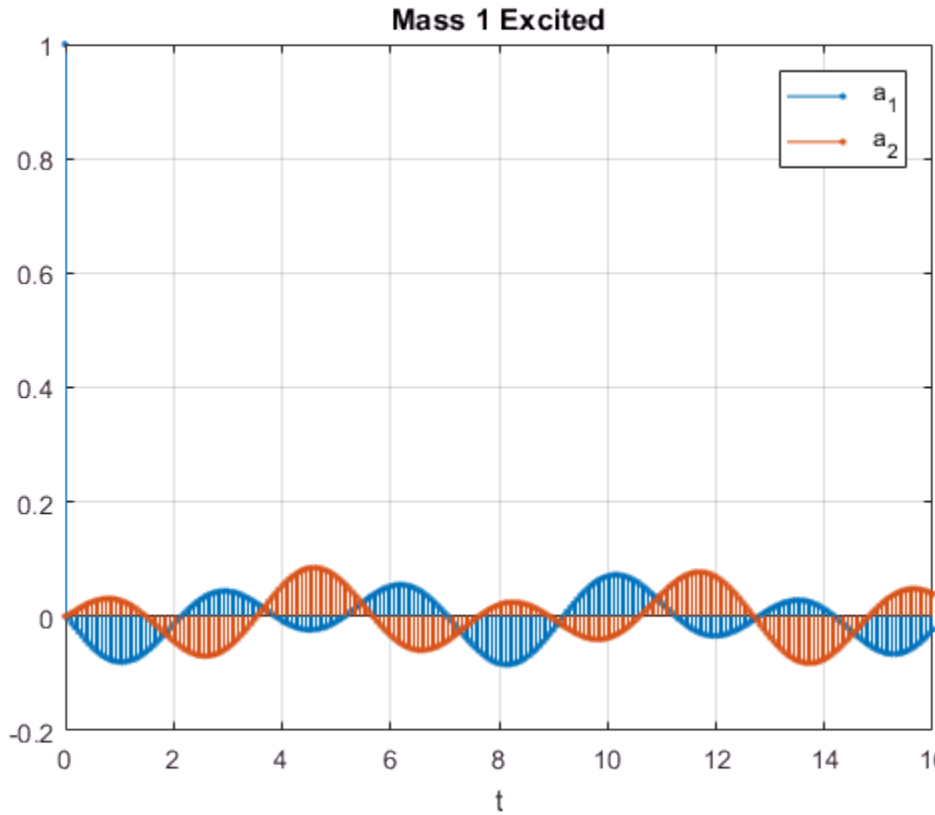

Convert the system to its transfer function representation. Find the response of the system to a positive unit impulse excitation on the first mass.

```
[b1,a1] = ss2tf(A,B,C,D,1);
y1u1 = filter(b1(1,:),a1,ux);
y1u2 = filter(b1(2,:),a1,ux);
```

Plot the result. The transfer function gives the same response as the state-space model.

```
stem(t,[y1u1;y1u2]','.')
xlabel('t')
legend('a_1','a_2')
title('Mass 1 Excited')
grid
```

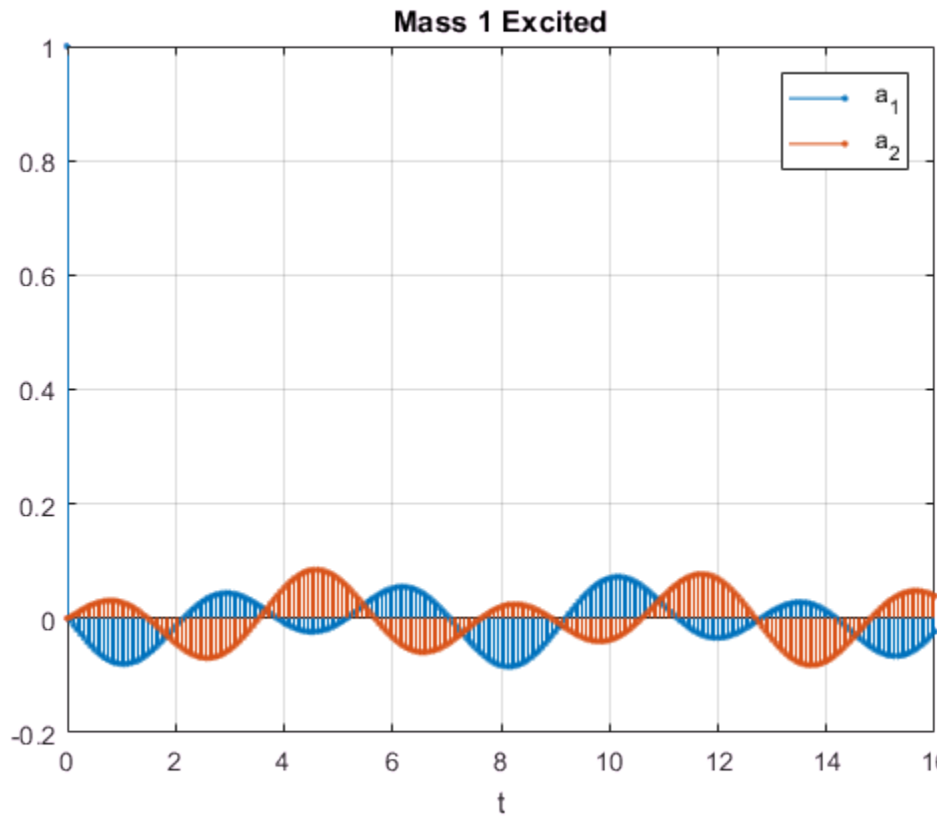

The system is reset to its initial configuration. Now the other mass, m_2, receives a unit impulse in the positive direction. Compute the time evolution of the system.

```
u = [u0;ux];

x = [0;0;0;0];
for k = 1:N
    y(:,k) = C*x + D*u(:,k);
    x = A*x + B*u(:,k);
end
```

Plot the accelerations. The responses of the individual masses are switched.

```
stem(t,y','.')
```

```
xlabel('t')
legend('a_1','a_2')
title('Mass 2 Excited')
grid
```

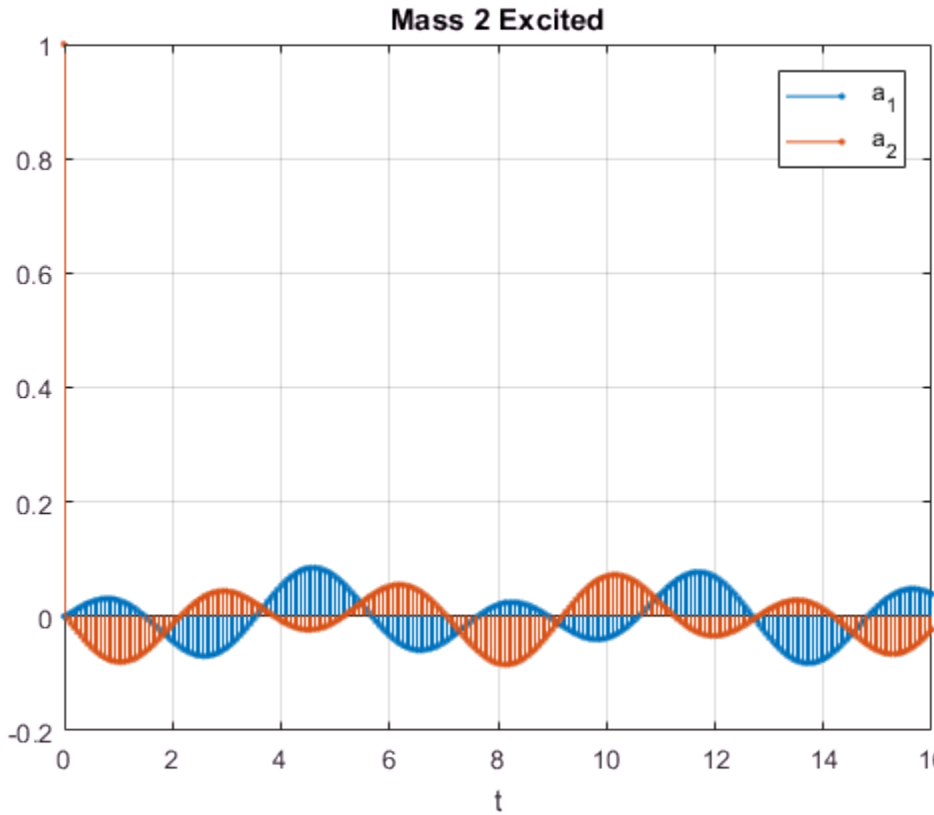

Find the response of the system to a positive unit impulse excitation on the second mass.

```
[b2,a2] = ss2tf(A,B,C,D,2);
y2u1 = filter(b2(1,:),a2,ux);
y2u2 = filter(b2(2,:),a2,ux);
```

Plot the result. The transfer function gives the same response as the state-space model.

```
stem(t,[y2u1;y2u2]','.')
```

```
xlabel('t')
legend('a_1','a_2')
title('Mass 2 Excited')
grid
```

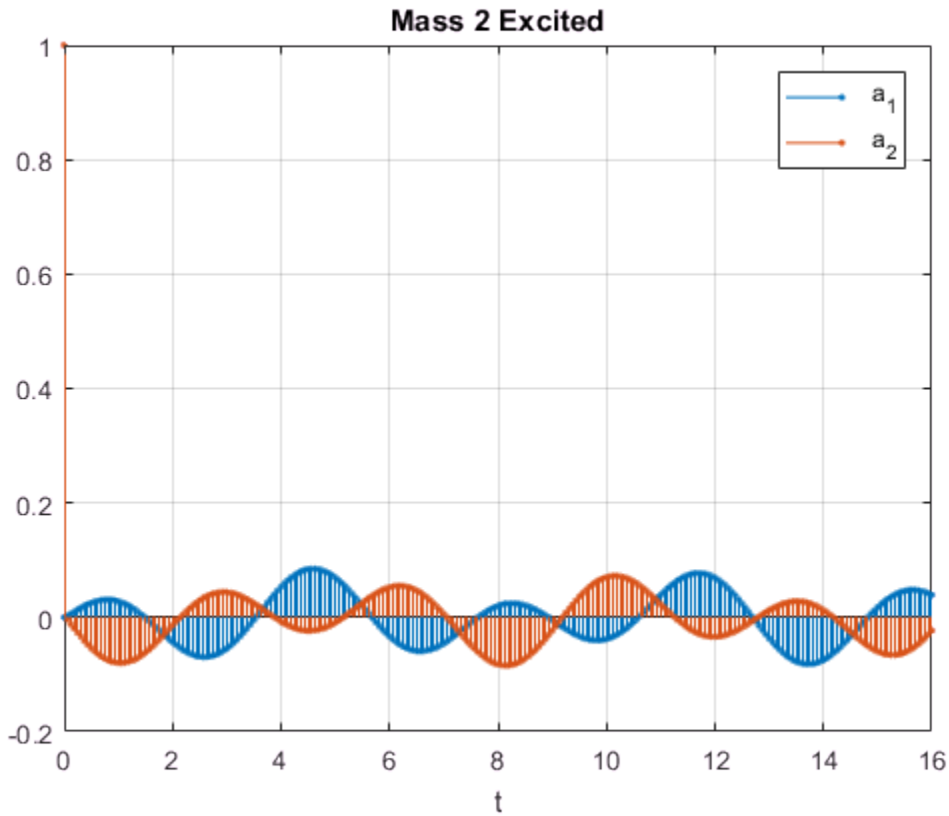

Input Arguments

A — State matrix
matrix

State matrix, specified as a matrix. If the system has p inputs and q outputs and is described by n state variables, then `A` is n-by-n.

Data Types: `single` | `double`

`B` — Input-to-state matrix
matrix

Input-to-state matrix, specified as a matrix. If the system has p inputs and q outputs and is described by n state variables, then `B` is n-by-p.

Data Types: `single` | `double`

`C` — State-to-output matrix
matrix

State-to-output matrix, specified as a matrix. If the system has p inputs and q outputs and is described by n state variables, then `C` is q-by-n.

Data Types: `single` | `double`

`D` — Feedthrough matrix
matrix

Feedthrough matrix, specified as a matrix. If the system has p inputs and q outputs and is described by n state variables, then `D` is q-by-p.

Data Types: `single` | `double`

`ni` — Input index
1 (default) | integer scalar

Input index, specified as an integer scalar. If the system has p inputs, use `ss2tf` with a trailing argument `ni` = 1, …, p to compute the response to a unit impulse applied to the `ni`th input.

Data Types: `single` | `double`

Output Arguments

`b` — Transfer function numerator coefficients
vector | matrix

Transfer function numerator coefficients, returned as a vector or matrix. If the system has p inputs and q outputs and is described by n state variables, then b is q-by-(n + 1) for each input. The coefficients are returned in descending powers of s or z.

a — Transfer function denominator coefficients
vector

Transfer function denominator coefficients, returned as a vector. If the system has p inputs and q outputs and is described by n state variables, then a is 1-by-(n + 1) for each input. The coefficients are returned in descending powers of s or z.

Definitions

Transfer Function

- For discrete-time systems, the state-space matrices relate the state vector x, the input u, and the output y through

$$\begin{aligned} x(k+1) &= \mathrm{A}\,x(k) + \mathrm{B}u(k) \\ y(k) &= \mathrm{C}\,x(k) + \mathrm{D}u(k). \end{aligned}$$

  The transfer function is the Z-transform of the system's impulse response. It can be expressed in terms of the state-space matrices as

$$\mathrm{H}(z) = \mathrm{C}(z\mathrm{I} - \mathrm{A})^{-1}\mathrm{B} + \mathrm{D}.$$

- For continuous-time systems, the state-space matrices relate the state vector x, the input u, and the output y through

$$\begin{aligned} \dot{x} &= \mathrm{A}\,x + \mathrm{B}u \\ y &= \mathrm{C}\,x + \mathrm{D}\,u. \end{aligned}$$

  The transfer function is the Laplace transform of the system's impulse response. It can be expressed in terms of the state-space matrices as

$$\mathrm{H}(s) = \mathrm{C}(s\mathrm{I} - \mathrm{A})^{-1}\mathrm{B} + \mathrm{D}.$$

See Also

See Also

`latc2tf` | `sos2tf` | `ss2sos` | `ss2zp` | `tf2ss` | `zp2tf`

Introduced before R2006a

sscanf

Read formatted data from string

Syntax

```
A = sscanf(str,formatSpec)
A = sscanf(str,formatSpec,sizeA)
[A,n] = sscanf(___)
[A,n,errmsg] = sscanf(___)
[A,n,errmsg,nextindex] = sscanf(___)
```

Description

`A = sscanf(str,formatSpec)` reads data from `str`, converts it according to the format specified by `formatSpec`, and returns the results in an array. `str` is either a character array or a string scalar. The `sscanf` function repeatedly applies `formatSpec` to sequences of characters in `str` until it either reaches the end of `str` or fails to match `formatSpec` to a sequence of characters. If `str` is a character array with more than one row, `sscanf` reads the characters in column order.

`A = sscanf(str,formatSpec,sizeA)` sets the size of the output array to be `sizeA` and then reads data from `str` into the output array. `sizeA` must be a positive integer or have the form `[m n]`, where `m` and `n` are positive integers.

`[A,n] = sscanf(___)` also returns the number of elements that `sscanf` successfully reads into `A`.

`[A,n,errmsg] = sscanf(___)` also returns a character vector containing an error message when `sscanf` fails to read all the data into `A`. If `sscanf` succeeds, then `errmsg` is an empty character vector.

`[A,n,errmsg,nextindex] = sscanf(___)` also returns the index of the position in `str` that immediately follows the last character scanned by `sscanf`.

Examples

Convert Character Vector to Numbers

Create a character vector that represents several numbers separated by whitespace characters. Convert the character vector to a column vector of numbers. `sscanf` treats whitespace characters as separators between numbers.

```
chr = '2.7183  3.1416  0.0073'
```

```
chr =
'2.7183  3.1416  0.0073'
```

```
A = sscanf(chr,'%f')
```

```
A =

    2.7183
    3.1416
    0.0073
```

Convert Text and Resize Output Array

Create a string that represents several numbers and convert it using `sscanf`. Specify the size of the output array.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "2.7183  3.1416  0.0073"
```

```
str =
"2.7183  3.1416  0.0073"
```

```
A = sscanf(str,'%f',[1 3])
```

```
A =

    2.7183    3.1416    0.0073
```

Convert `str` to a 2-by-2 matrix. Because `str` represents only three numbers, `sscanf` pads `A` with enough zeroes to fill in the matrix.

```
A = sscanf(str,'%f',[2 2])
```

```
A =

    2.7183    0.0073
    3.1416         0
```

Count Elements Found in Text

Create a string that contains numbers separated by whitespace characters. Count the elements that `sscanf` puts into the output array when it converts the string to numbers.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "78 72 64 66 49"
```

```
str =
"78 72 64 66 49"
```

Count the elements in the output array A. Convert the numbers in the string using the %d operator. %d matches integers separated by whitespace. To return the number of elements in A, specify a second output argument.

```
[A,n] = sscanf(str,'%d')
```

```
A =

    78
    72
    64
    66
    49


n = 5
```

Display Error Message

Create a string and read data from it. When `sscanf` fails to convert all of the input string, display the error message.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "3.14159 are the first 6 digits of pi"
```

```
str =
"3.14159 are the first 6 digits of pi"
```

Convert the number in `str`. Since `str` also contains characters that `%f` cannot match, `sscanf` returns an error message. `sscanf` stops processing as soon as it encounters the word `'are'` because it cannot be converted to a number.

```
[A,n,errmsg] = sscanf(str,'%f')
```

```
A = 3.1416

n = 1

errmsg =
'Matching failure in format.'
```

Return Last Position Scanned

Create a character vector and read data from it. When `sscanf` fails to convert all of the input, return the index that immediately follows the position at which `sscanf` stopped. Use this index to display the unscanned input.

```
chr = '3.14159 are the first 6 digits of pi'
```

```
chr =
'3.14159 are the first 6 digits of pi'
```

Convert the data in `chr`. Return the index.

```
[A,~,~,nextindex] = sscanf(chr,'%f')
```

```
A = 3.1416

nextindex = 9
```

Display the characters from `chr` that `sscanf` did not scan.

```
chr(nextindex:end)
```

```
ans =
```

```
'are the first 6 digits of pi'
```

Match Specified Characters

Create a string that contains several temperatures, indicated by the degree symbol and the letter F. Convert the temperatures to a numeric array.

Starting in R2017a, you can create strings using double quotes instead of the `string` function. To insert the degree symbol (`char(176)`), use the `insertBefore` function.

```
T = "78F 72F 64F 66F 49F";
degreeSymbol = char(176);
T = insertBefore(T,'F',degreeSymbol)
```

```
T =
"78°F 72°F 64°F 66°F 49°F"
```

Return the temperatures as a numeric array.

```
A = sscanf(T,strcat("%d",degreeSymbol,"F"))
```

```
A =

    78
    72
    64
    66
    49
```

- "Formatting Text"

Input Arguments

`str` — Input text to scan
character array | string scalar

Input text to scan, specified as a character array or string scalar. If `str` is a character array, then it can have multiple rows, and `sscanf` reads the characters in column order.

Data Types: `char` | `string`

`formatSpec` — Format of input fields

formatting operators

Format of the input fields, specified using formatting operators. `formatSpec` can be a character vector in single quotes, or a string scalar.

Numeric Fields

This table lists available conversion specifiers to convert text to numeric outputs. `sscanf` converts values to their decimal (base 10) representation.

Numeric Field Type	Conversion Specifier	Description
Integer, signed	`%d`	Base 10.
	`%i`	The values determine the base: • The default is base 10. • If the initial digits are `0x` or `0X`, then the values are base 16 (hexadecimal). • If the initial digit is `0`, then values are base 8 (octal).
	`%ld` or `%li`	64-bit values, base 10, 8, or 16.
Integer, unsigned	`%u`	Base 10.
	`%o`	Base 8 (octal).
	`%x`	Base 16 (hexadecimal).
	`%lu`, `%lo`, `%lx`	64-bit values, base 10, 8, or 16.
Floating-point number	`%f`, `%e`, or `%g`	Floating-point values. Input fields can contain any of the following (not case sensitive): `Inf`, `-Inf`, `NaN`, or `-NaN`. Input fields that represents floating-point numbers can include leading `+` or `-` symbols and exponential notation using `e` or `E`. The conversion specifiers `%f`, `%e`, and `%g` all treat input fields the same way.

Character Fields

This table lists available conversion specifiers to convert text so that the output is a character array.

Character Field Type	Conversion Specifier	Description
Character vector or string scalar	`%s`	Read the text until `sscanf` encounters whitespace.
	`%c`	Read any single character, including whitespace. To read multiple characters at a time, specify field width. For example, `%10c` reads 10 characters at a time.
Pattern-matching	`%[...]`	Read only characters in the brackets up to the first nonmatching character or whitespace. Example: `%[mus]` reads `'summer '` as `'summ'`.

If `formatSpec` contains a combination of numeric and character specifiers, then `sscanf` converts each character to its numeric equivalent.

Optional Operators

- Fields and Characters to Ignore

  `sscanf` reads all numeric values and characters in sequence, unless you tell it to ignore a particular field or a portion of a field. To skip fields, insert an asterisk (`*`) after the percent sign (`%`). For example, to skip integers, specify `%*d`.

- Field Width

  To specify the maximum number of digits or text characters to read at a time, insert a number after the percent character. For example, `%10c` reads up to 10 characters at a time, including whitespace. `%4f` reads up to four digits at a time, including the decimal point.

- Literal Text to Ignore

  `sscanf` ignores specified text immediately before or after the conversion specifier.

  Example: `Level%u` reads `'Level1'` as `1`.

Example: `%uStep` reads `'2Step'` as `2`.

Data Types: `char` | `string`

`sizeA` — Dimensions of output array

`Inf` (default) | integer | two-element row vector

Dimensions of the output array, `A`, specified as `Inf`, a positive integer, or a two-element row vector.

Form of `sizeA` Input	Description
`Inf`	Read input to the end. For numeric data, `A` is a column vector. For text data, `A` is a character vector.
`n`	Read at most `n` numeric values or space-delimited character fields. For numeric data, `A` is a column vector. For text data, `A` is a character vector.
`[m n]`	Read at most `m*n` numeric values or character fields. `n` can be `Inf`, but `m` cannot. `A` is `m`-by-`n`, filled in column order.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

`A` — Output data

column vector | matrix | character array

Output data, returned as a column vector, matrix, or character array. The class and size of `A` depend on the conversions specified by `formatSpec` and the size of the output array specified by `sizeA`:

- If `formatSpec` contains only numeric specifiers, then `A` is a numeric column vector. If you also specify the `sizeA` argument, then `A` is a matrix of the specified size, and is padded with zeroes if necessary. If the input contains fewer than `sizeA` values, then

the size of A is smaller than sizeA. Instead, it is the size required to store the values scanned from the input.

- If formatSpec contains only 64-bit signed integer specifiers, then A is of class int64.
- If formatSpec contains only 64-bit unsigned integer specifiers, then A is of class uint64.
- Otherwise, A is of class double.

- If formatSpec contains only %c or %s specifiers, then A is a character vector. If you also specify sizeA, then A is a character array, and is padded as necessary with null characters. (The null character is a control character with the value zero.) If the input contains fewer than sizeA characters, then the size of A is smaller than sizeA. Instead, it is the size required to store the characters scanned from the input.
- If formatSpec contains a combination of numeric and character specifiers, then A is numeric, of class double, and sscanf converts each character to its numeric equivalent. This conversion occurs even when formatSpec explicitly skips all numeric fields (for example, formatSpec is '%*d %s').
- If sscanf cannot match all of the input to formatSpec, then A can be numeric or a character array. The class of A depends on the values that sscanf reads before it stops processing.

Data Types: double | int64 | uint64 | char

n — Number of elements read into output array

integer

Number of elements read into the output array, returned as an integer.

Data Types: double

errmsg — Error message

character vector

Error message, returned as a character vector. If str contains any data that sscanf cannot convert, then errmsg contains an error message. If sscanf converts all the data successfully, then errmsg is an empty character vector.

Data Types: char

nextindex — Position after last character scanned

integer

Position after the last character scanned, returned as an integer.

Data Types: `double`

Tips

- Format specifiers for the reading functions `sscanf` and `fscanf` differ from the formats for the writing functions `sprintf` and `fprintf`. The reading functions do not support a precision field. The width field specifies a minimum for writing, but a maximum for reading.

See Also

See Also

`compose` | `fprintf` | `fscanf` | `sprintf` | `textscan`

Topics

"Formatting Text"

Introduced before R2006a

stack

Stack data from multiple variables into single variable

Syntax

```
S = stack(U,vars)
S = stack(U,vars,Name,Value)
[S,iu] = stack( ___ )
```

Description

`S = stack(U,vars)` converts the table or timetable, `U`, into an equivalent table or timetable, `S`, that is stacked. The `stack` function stacks up multiple variables from `U`, specified by `vars`, into a single variable in `S`. In general, `S` contains fewer variables, but more rows, than `U`.

The output argument, `S`, contains a new categorical variable to indicate which variable in `U` the stacked data in each row came from. `stack` replicates data from the variables in `U` that are not stacked.

- If `U` is a table, then you cannot stack row names.
- If `U` is a timetable, then you cannot stack row times.

`S = stack(U,vars,Name,Value)` converts the table, `U`, with additional options specified by one or more `Name,Value` pair arguments.

For example, you can specify variable names for the new and stacked variables in `U`.

`[S,iu] = stack( ___ )` also returns an index vector, `iu`, indicating the correspondence between rows in `S` and rows in `U`. You can use any of the previous input arguments.

Examples

Stack Three Variables into One

Create a table containing test scores from three separate tests. The table is in unstacked format.

```
Test1 = [93;57;87;89];
Test2 = [89;77;92;86];
Test3 = [95;62;89;91];

U = table(Test1,Test2,Test3)
```

```
U = 4×3 table
    Test1    Test2    Test3
    _____    _____    _____

    93       89       95
    57       77       62
    87       92       89
    89       86       91
```

The table contains four rows and three variables.

Stack the test scores into a single variable.

```
S = stack(U,1:3)
```

```
S = 12×2 table
    Test1_Test2_Test3_Indicator    Test1_Test2_Test3
    ___________________________    _________________

    Test1                          93
    Test2                          89
    Test3                          95
    Test1                          57
    Test2                          77
    Test3                          62
    Test1                          87
    Test2                          92
    Test3                          89
    Test1                          89
    Test2                          86
    Test3                          91
```

`S` contains twelve rows and two variables. `S` is in stacked format.

The categorical variable, `Test1_Test2_Test3_Indicator`, identifies which test corresponds to the score in the stacked data variable, `Test1_Test2_Test3`.

Stack Variables and Specify Variable Names

Create a table indicating the amount of snowfall at three locations from five separate storms.

```
Storm = [1;2;3;4;5];
Date = {'12/25/11';'1/2/12';'1/23/12';'2/7/12';'2/15/12'};
Natick = [20;5;13;0;17];
Boston = [18;9;21;5;12];
Worcester = [26;10;16;3;15];

U = table(Storm,Date,Natick,Boston,Worcester)
```

```
U = 5×5 table
    Storm       Date       Natick    Boston    Worcester
    _____    __________    ______    ______    _________

    1        '12/25/11'    20        18        26
    2        '1/2/12'       5         9        10
    3        '1/23/12'     13        21        16
    4        '2/7/12'       0         5         3
    5        '2/15/12'     17        12        15
```

The variables `Storm` and `Date` contain data that is constant at each location.

Stack the variables `Natick`, `Boston`, and `Worcester` into a single variable. Name the variable containing the stacked data, `Snowfall`, and name the new indicator variable, `Town`.

```
S = stack(U,{'Natick','Boston','Worcester'},...
    'NewDataVariableName','Snowfall',...
    'IndexVariableName','Town')
```

```
S = 15×4 table
    Storm       Date         Town       Snowfall
    _____    __________    _________    ________

    1        '12/25/11'    Natick       20
    1        '12/25/11'    Boston       18
    1        '12/25/11'    Worcester    26
    2        '1/2/12'      Natick        5
    2        '1/2/12'      Boston        9
    2        '1/2/12'      Worcester    10
```

```
    3        '1/23/12'     Natick       13
    3        '1/23/12'     Boston       21
    3        '1/23/12'     Worcester    16
    4        '2/7/12'      Natick        0
    4        '2/7/12'      Boston        5
    4        '2/7/12'      Worcester     3
    5        '2/15/12'     Natick       17
    5        '2/15/12'     Boston       12
    5        '2/15/12'     Worcester    15
```

`S` contains three rows for each storm, and `stack` repeats the data in the constant variables, `Storm` and `Date`, accordingly.

The categorical variable, `Town`, identifies which variable in `U` contains the corresponding `Snowfall` data.

Stack Variables and Output Index Vector

Create a table containing estimated influenza rates along the east coast of the United States. Create a different variable for the Northeast, Mid Atlantic, and South Atlantic. Data Source: Google Flu Trends (http://www.google.org/flutrends).

```
Month = {'October';'November';'December';...
    'January';'February';'March'};
Year = [2005*ones(3,1); 2006*ones(3,1)];
NE = [1.1902; 1.3610; 1.5003; 1.7772; 2.1350; 2.2345];
MidAtl = [1.1865; 1.4120; 1.6043; 1.8830; 2.1227; 1.9920];
SAtl = [1.2730; 1.5820; 1.8625; 1.9540; 2.4803; 2.0203];

fluU = table(Month,Year,NE,MidAtl,SAtl)
```

```
fluU = 6×5 table
      Month       Year      NE      MidAtl     SAtl
    __________    ____    ______    ______    ______

    'October'     2005    1.1902    1.1865     1.273
    'November'    2005     1.361     1.412     1.582
    'December'    2005    1.5003    1.6043    1.8625
    'January'     2006    1.7772     1.883     1.954
    'February'    2006     2.135    2.1227    2.4803
    'March'       2006    2.2345     1.992    2.0203
```

The variables `Month` and `Year` contain data that is constant across the row.

Stack the variables `NE`, `MidAtl`, and `SAtl` into a single variable called `FluRate`. Name the new indicator variable `Region` and output an index vector, `ifluU`, to indicate the correspondence between rows in the input unstacked table, `fluU`, and the output stacked table, `fluS`.

```
[fluS,ifluU] = stack(fluU,3:5,...
    'NewDataVariableName','FluRate',...
    'IndexVariableName','Region')
```

```
fluS = 18×4 table
      Month        Year    Region    FluRate
    __________     ____    ______    _______

    'October'      2005    NE        1.1902
    'October'      2005    MidAtl    1.1865
    'October'      2005    SAtl       1.273
    'November'     2005    NE         1.361
    'November'     2005    MidAtl     1.412
    'November'     2005    SAtl       1.582
    'December'     2005    NE        1.5003
    'December'     2005    MidAtl    1.6043
    'December'     2005    SAtl      1.8625
    'January'      2006    NE        1.7772
    'January'      2006    MidAtl     1.883
    'January'      2006    SAtl       1.954
    'February'     2006    NE         2.135
    'February'     2006    MidAtl    2.1227
    'February'     2006    SAtl      2.4803
    'March'        2006    NE        2.2345
    'March'        2006    MidAtl     1.992
    'March'        2006    SAtl      2.0203


ifluU =

     1
     1
     1
     2
     2
     2
     3
     3
```

```
3
4
```

`ifluU(5)` is `2`. The fifth row in the output table, `fluS`, contains data from the second row in the input table `fluU`.

Input Arguments

`U` — Input table

table | timetable

Input table, specified as a table or a timetable.

`vars` — Variables in `U` to stack

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables in `U` to stack, specified as a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'NewDataVariableName','StackedData'` names the new data variable `StackedData`.

`'ConstantVariables'` — Variables other than `vars` to include in the output

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables other than `vars` to include in the output, specified as the comma-separated pair consisting of `'ConstantVariables'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector. `stack` replicates the data from the constant variables for each stacked entry from a row.

The default is all the variables in U not specified by vars. You can specify the 'ConstantVariables' name-value pair argument to exclude variables not specified by vars or 'ConstantVariables' from the output table, S.

U can have row labels along its first dimension. If U is a table, then it can have row names as the labels. If U is a timetable, then it must have row times as the labels.

- You can include the row names or row times when you specify the value of 'ConstantVariables'.
- stack replicates the row names or row times even when you do not include them in 'ConstantVariables'.

'NewDataVariableName' — Name for the new data variable in S
character vector

Name for the new data variable in S, specified as the comma-separated pair consisting of 'NewDataVariableName' and a character vector. The default is a concatenation of the names of the variables from U that are stacked up.

'IndexVariableName' — Name for the new indicator variable in S
character vector

Name for the new indicator variable in S, specified as the comma-separated pair consisting of 'IndexVariableName' and a character vector. The default is a name based on NewDataVariableName.

Output Arguments

S — Output table
table | timetable

Stacked table, returned as a table or a timetable. S contains a stacked data variable, a categorical indicator variable, and any constant variables.

You can store additional metadata such as descriptions, variable units, variable names, and row names in S. For more information, see Table Properties or Timetable Properties.

stack assigns the variable units and variable description property values from the first variable listed in vars to the corresponding S.Properties.VariableUnits and S.Properties.VariableDescrisciptions values for the new data variable.

`iu` — Index to `U`
column vector

Index to `U`, returned as a column vector. The index vector, `iu`, identifies the row in the input table, `U`, containing the corresponding data. `stack` creates the `j`th row in the output table, `S`, using `U(iu(j),vars)`.

Tips

- You can specify more than one group of data variables in `U`, and each group becomes a stacked data variable in `S`. Use a cell array to contain multiple values for `vars`, and a cell array of character vectors to contain multiple values for the `'NewDataVariableName'` name-value pair argument. All groups must contain the same number of variables.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

The two-output syntax `[S,iu] = stack(...)` is not supported.

For more information, see “Tall Arrays”.

See Also

See Also
`join` | `unstack`

Introduced in R2013b

stairs

Stairstep graph

Syntax

```
stairs(Y)
stairs(X,Y)
stairs(___,LineSpec)
stairs(___,Name,Value)
```

```
stairs(ax,___)
```

```
h = stairs(___)
```

```
[xb,yb] = stairs(___)
```

Description

`stairs(Y)` draws a stairstep graph of the elements in `Y`.

- If `Y` is a vector, then `stairs` draws one line.
- If `Y` is a matrix, then `stairs` draws one line per matrix column.

`stairs(X,Y)` plots the elements in `Y` at the locations specified by `X`. The inputs `X` and `Y` must be vectors or matrices of the same size. Additionally, `X` can be a row or column vector and `Y` must be a matrix with `length(X)` rows.

`stairs(___,LineSpec)` specifies a line style, marker symbol, and color. For example, `':*r'` specifies a dotted red line with asterisk markers. Use this option with any of the input argument combinations in the previous syntaxes.

`stairs(___,Name,Value)` modifies the stairstep chart using one or more name-value pair arguments. For example, `'Marker','o','MarkerSize',8` specifies 8 point circle markers.

`stairs(ax,___)` plots into the axes specified by `ax` instead of into the current axes (`gca`). The option, `ax`, can precede any of the input argument combinations in the previous syntaxes.

`h = stairs( ___ )` returns one or more `Stair` objects. Use `h` to make changes to properties of a specific `Stair` object after it is created.

`[xb,yb] = stairs( ___ )` does not create a plot, but returns matrices `xb` and `yb` of the same size, such that `plot(xb,yb)` plots the stairstep graph.

Examples

Plot Single Data Series

Create a stairstep plot of sine evaluated at 40 equally spaced values between 0 and 4π.

```
X = linspace(0,4*pi,40);
Y = sin(X);

figure
stairs(Y)
```

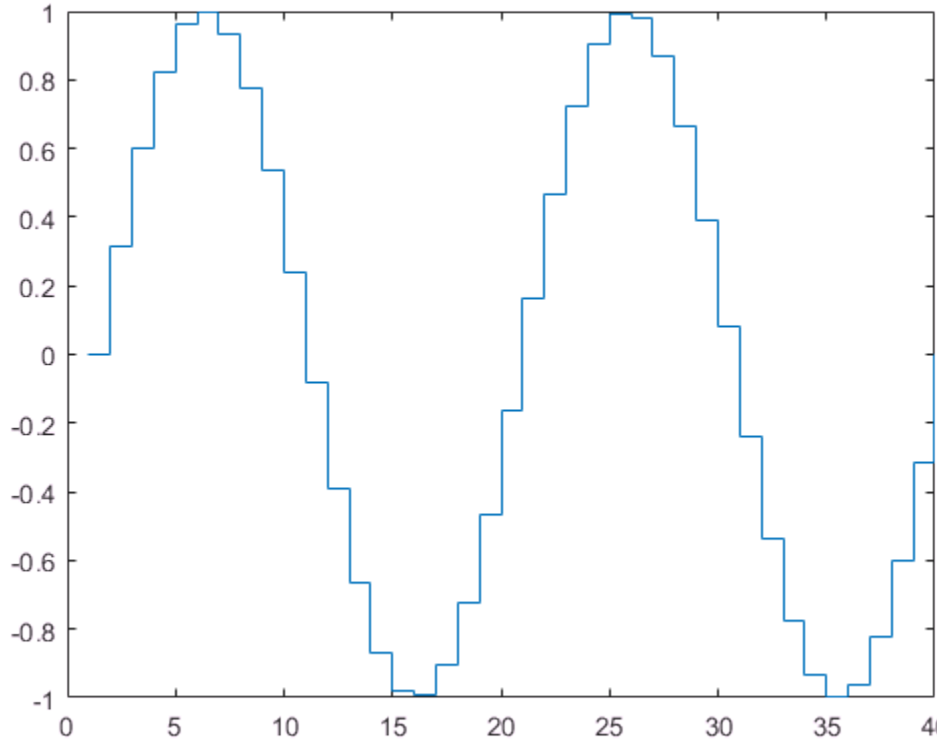

The length of Y automatically determines and generates the *x*-axis scale.

Plot Multiple Data Series

Create a stairstep plot of two cosine functions evaluated at 50 equally spaced values between 0 and 4π.

```
X = linspace(0,4*pi,50)';
Y = [0.5*cos(X), 2*cos(X)];

figure
stairs(Y)
```

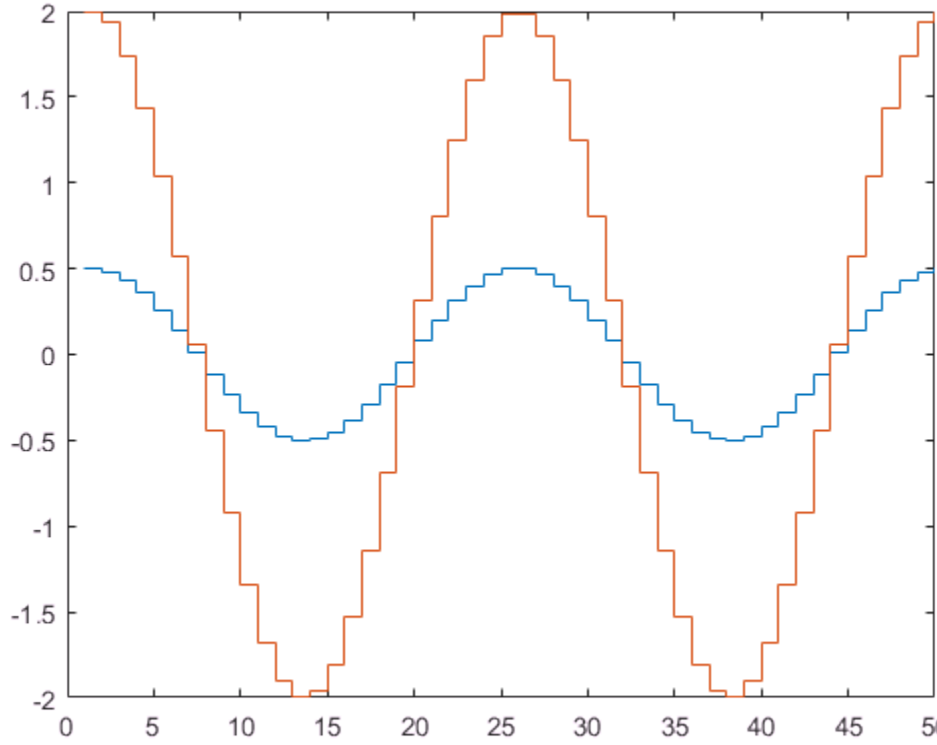

The number of rows in Y automatically determines and generates the *x*-axis scale.

Plot Single Data Series at Specified x-Values

Create a stairstep plot of a sine wave evaluated at equally spaced values between 0 and 4π. Specify the set of *x*-values for the plot.

```
X = linspace(0,4*pi,40);
Y = sin(X);

figure
stairs(X,Y)
```

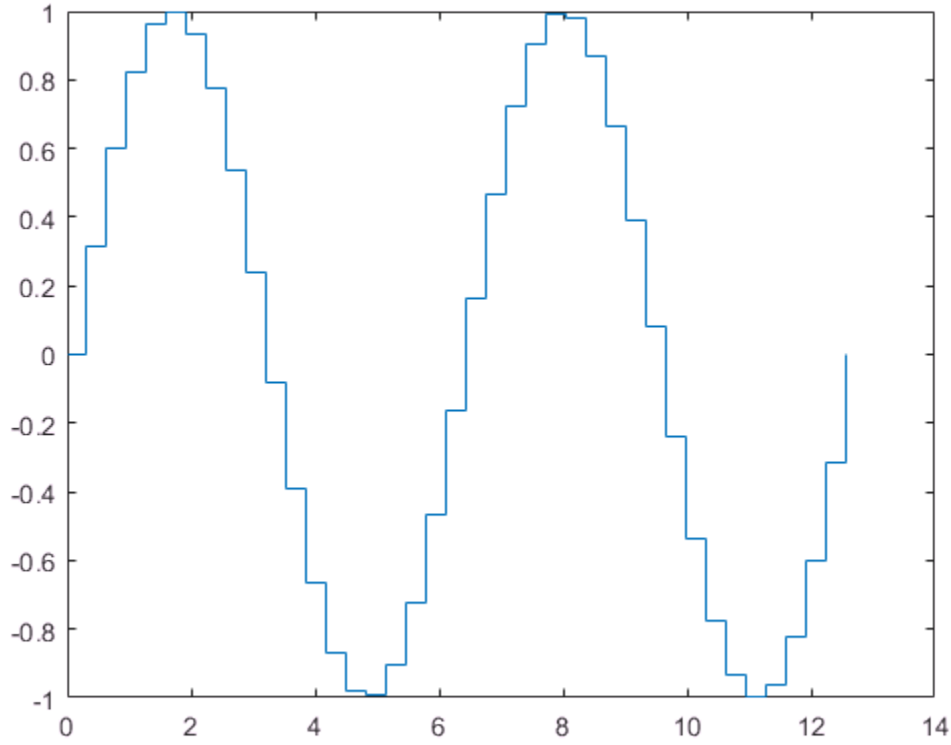

The entries in Y are plotted against the corresponding entries in X.

Plot Multiple Data Series at Specified x-Values

Create a stairstep plot of two cosine waves evaluated at equally spaced values between 0 and 4π. Specify the set of *x*-values for the plot.

```
X = linspace(0,4*pi,50)';
Y = [0.5*cos(X), 2*cos(X)];

figure
stairs(X,Y)
```

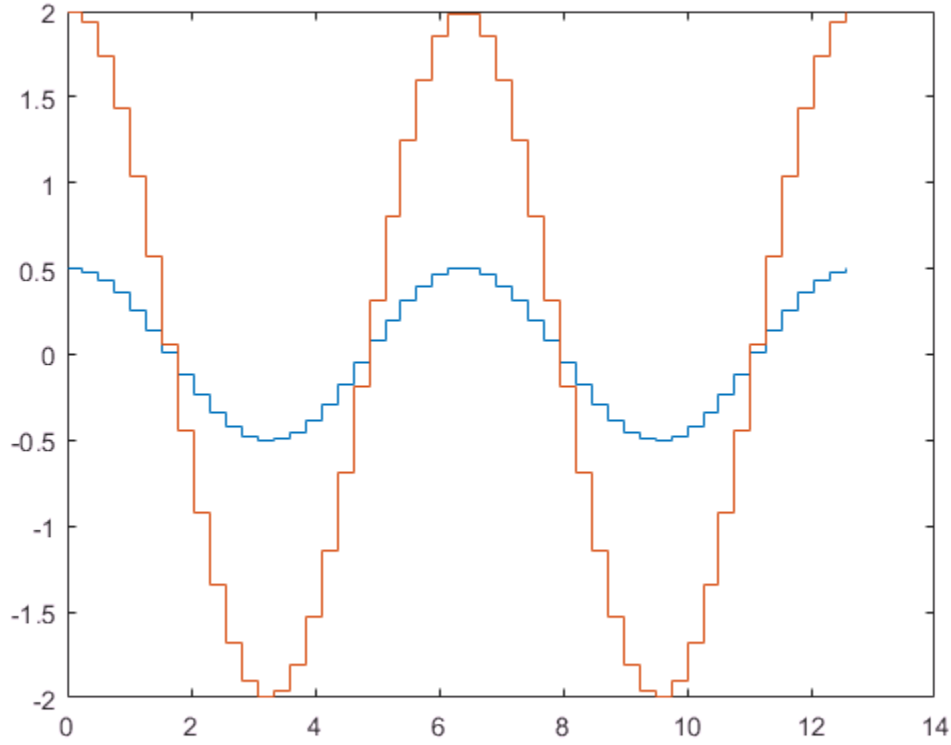

The first vector input, X, determines the *x*-axis positions for both data series.

Plot Multiple Data Series at Unique Sets of x-Values

Create a stairstep plot of two sine waves evaluated at different values. Specify a unique set of *x*-values for plotting each data series.

```
x1 = linspace(0,2*pi)';
x2 = linspace(0,pi)';
X = [x1,x2];
Y = [sin(5*x1),exp(x2).*sin(5*x2)];

figure
```

```
stairs(X,Y)
```

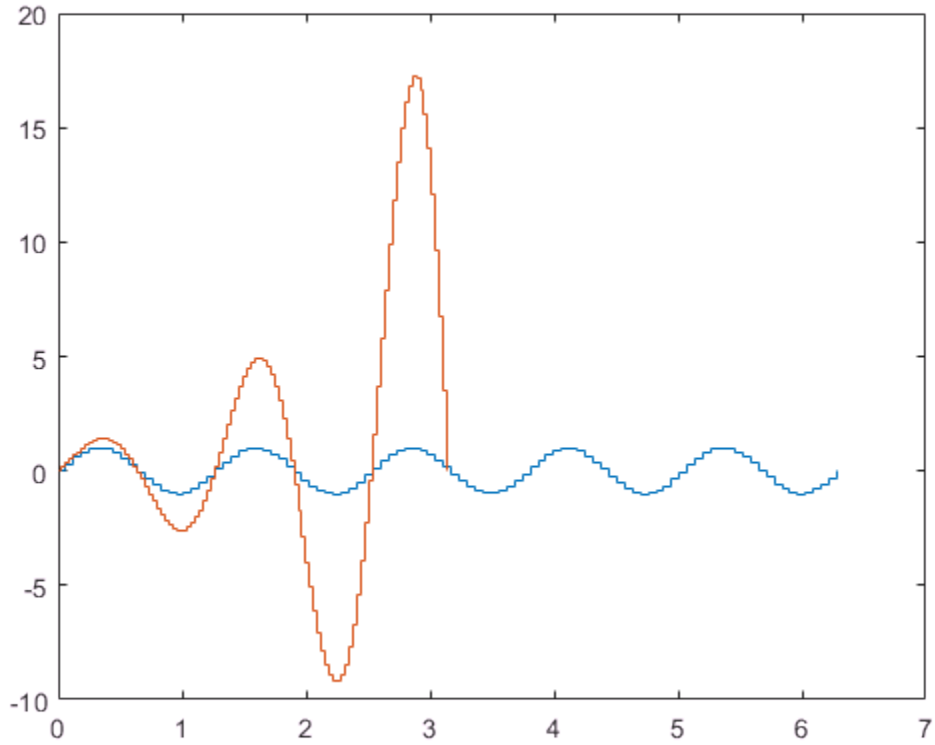

Each column of X is plotted against the corresponding column of Y.

Specify Line Style, Marker Symbol and Color

Create a stairstep plot and set the line style to a dot-dashed line, the marker symbol to circles, and the color to red.

```
X = linspace(0,4*pi,20);
Y = sin(X);
```

```
figure
stairs(Y, '-.or')
```

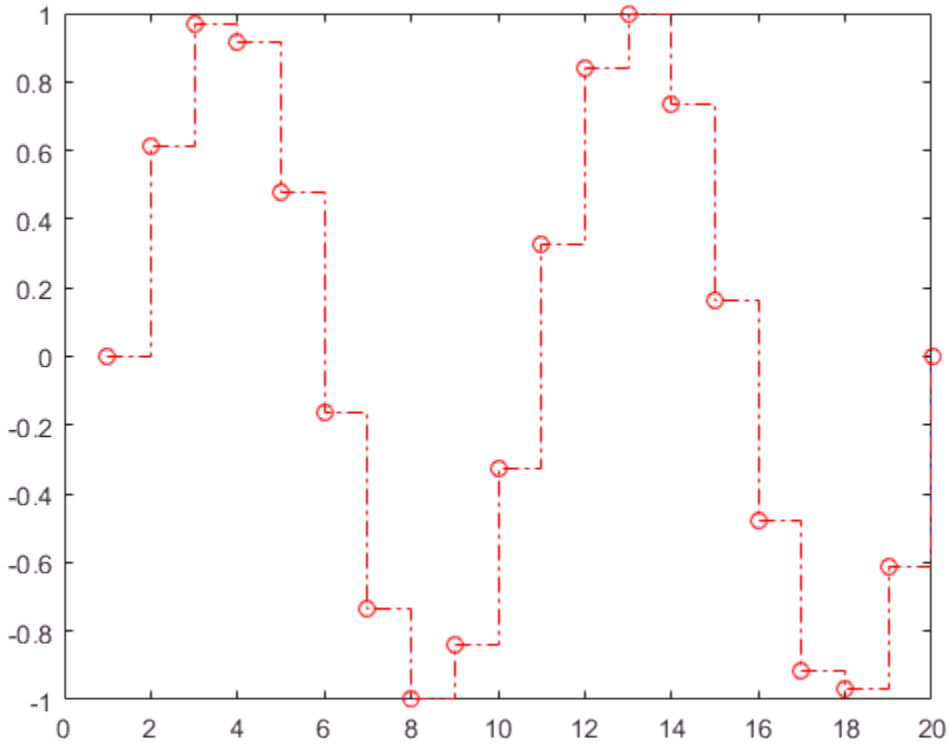

Specify Additional Style Options

Create a stairstep plot and set the line width to 2, the marker symbols to diamonds, and the marker face color to cyan using `Name,Value` pair arguments.

```
X = linspace(0,4*pi,20);
Y = sin(X);

figure
```

```
stairs(Y,'LineWidth',2,'Marker','d','MarkerFaceColor','c')
```

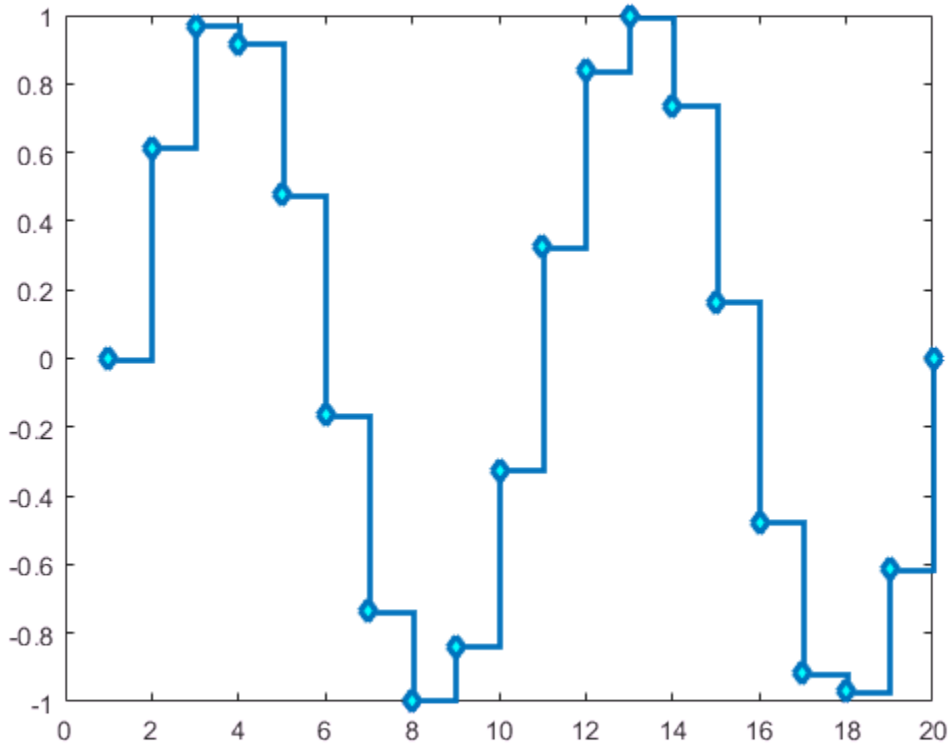

Specify Axes for Stairstep Plots

Create a figure with two subplots and return the two axes handles, `s(1)` and `s(2)`. Create a stairstep plot in each subplot by referring to the axes handles.

```
figure
s(1) = subplot(2,1,1);
s(2) = subplot(2,1,2);

X = linspace(0,2*pi);
```

```
Y1 = 5*sin(X);
Y2 = sin(5*X);
stairs(s(1),X,Y1)
stairs(s(2),X,Y2)
```

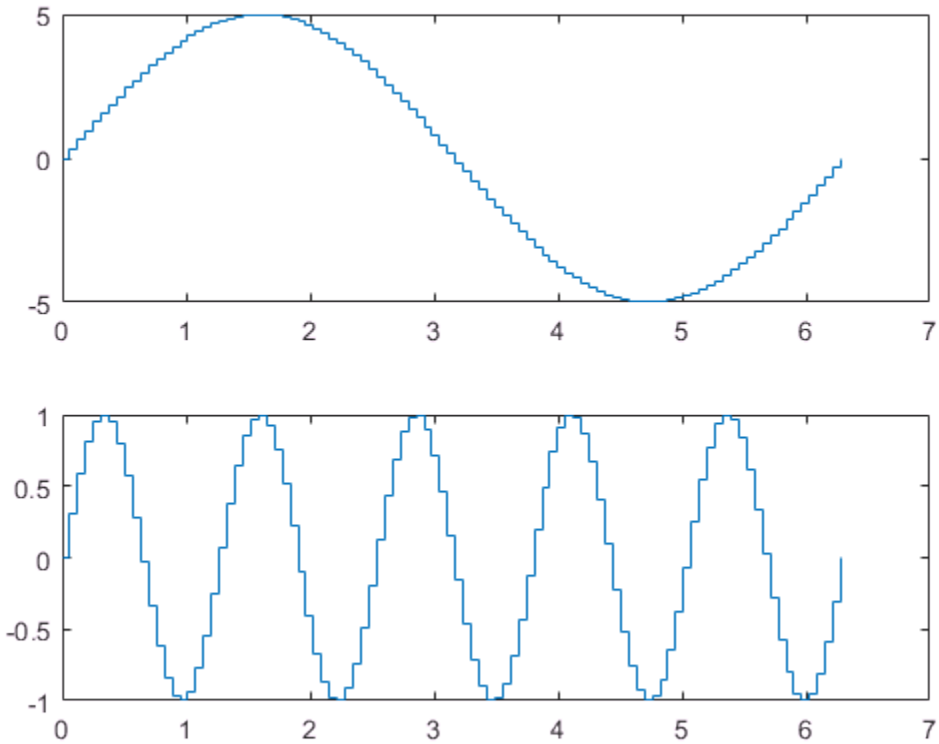

Modify Stairstep Plot After Creation

Create a stairstep plot of two data series and return the two stair objects.

```
X = linspace(0,1,30)';
Y = [cos(10*X), exp(X).*sin(10*X)];
h = stairs(X,Y);
```

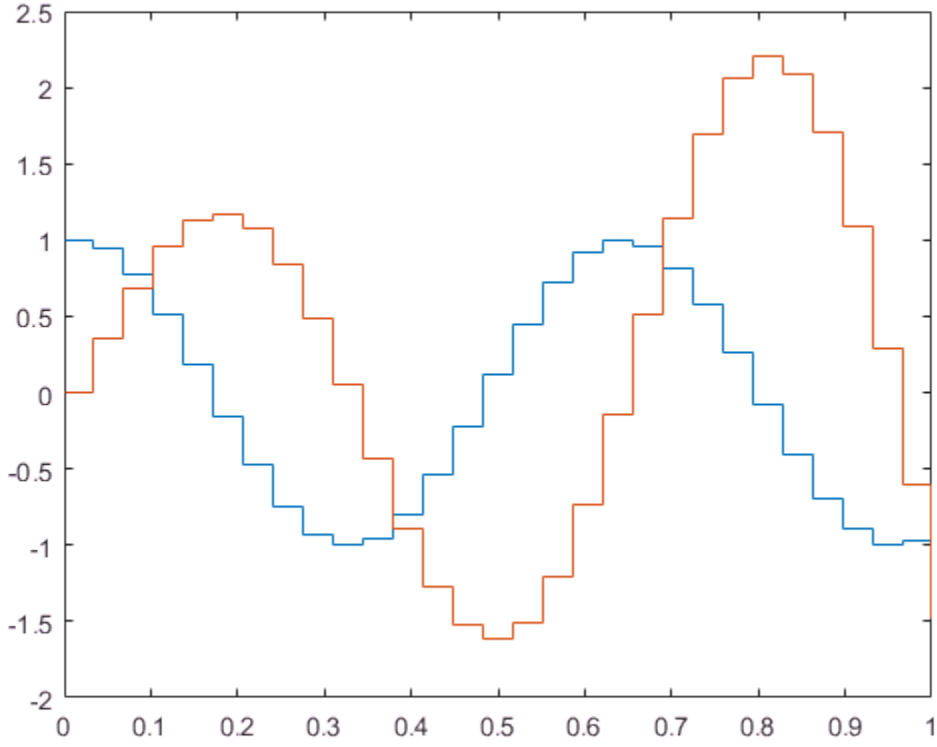

Use small circle markers for the first data series. Use magenta filled circles for the second series. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
h(1).Marker = 'o';
h(1).MarkerSize = 4;
h(2).Marker = 'o';
h(2).MarkerFaceColor = 'm';
```

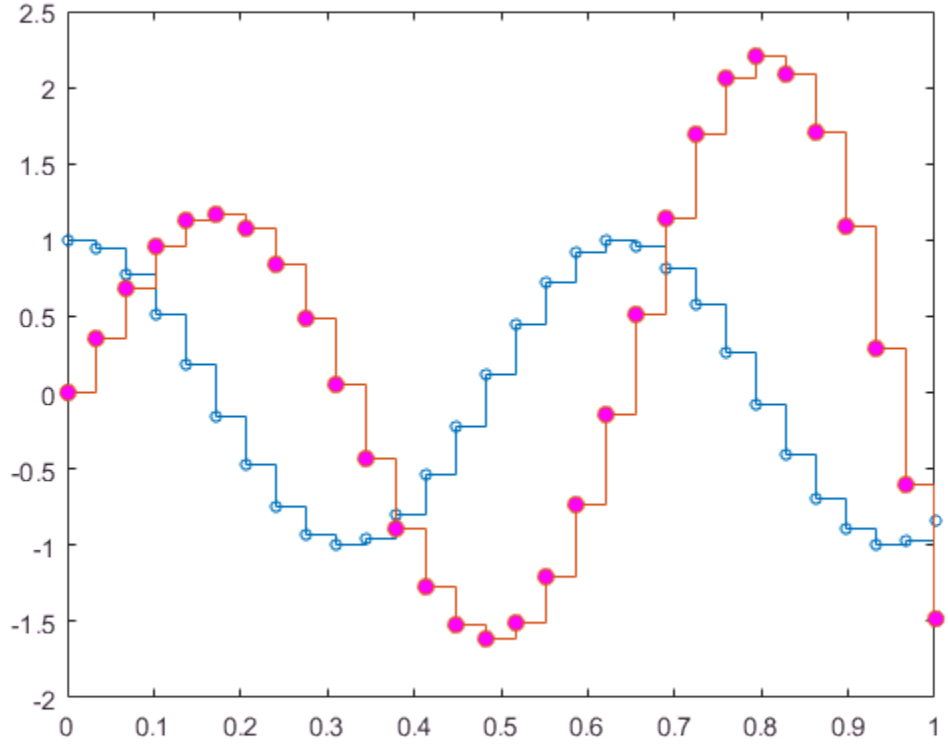

Create a Stairstep Plot using plot Function

Evaluate two cosine functions at 50 equally spaced values between 0 and 4π and create a stairstep plot using `plot`.

```
X = linspace(0,4*pi,50)';
Y = [0.5*cos(X), 2*cos(X)];
[xb,yb] = stairs(X,Y);
```

`stairs` returns two matrices of the same size, `xb` and `yb`, but no plot.

Use `plot` to create the stairstep plot with `xb` and `yb`.

```
figure
plot(xb,yb)
```

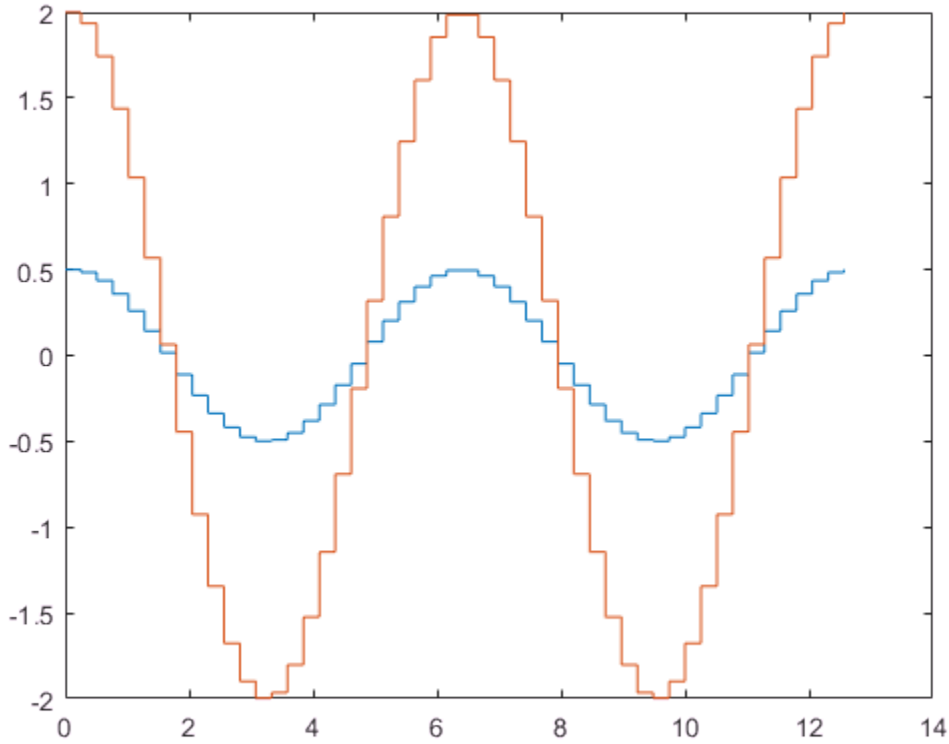

- "Plot Dates and Durations"
- "Plot Categorical Data"

Input Arguments

Y — y values
vector or matrix

y values, specified as a vector or matrix. When `Y` is a vector, `stairs` creates one stair object. When `Y` is a matrix, `stairs` draws one line per matrix column and creates a separate stair object for each column.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`X` — x values
vector or matrix

x values, specified as a vector or matrix. When `Y` is a vector, `X` must be a vector of the same size. When `Y` is a matrix, `X` must be a matrix of the same size, or a vector whose length equals the number of rows in `Y`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`LineSpec` — Line style, marker symbol, and color
character vector

Line style, marker symbol, and color, specified as a character vector. For more information on line style, marker symbol, and color options see `LineSpec`.

Example: `':*r'`

`ax` — `Axes` object
`Axes` object

`Axes` object. If you do not specify the axes, then `stairs` plots into the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Marker','s','MarkerFaceColor','red'` plots the stairstep graph with red square markers.

The properties listed here are only a subset. For a complete list, see Stair Properties.

`'LineStyle'` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`'Color'` — Line color

`[0 0.4470 0.7410]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`

Long Name	Short Name	RGB Triplet
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

'Marker' — Marker symbol

'none' (default) | 'o' | '+' | '*' | '.' | '*' | ...

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
'o'	Circle
'+'	Plus sign
'*'	Asterisk
'.'	Point

Value	Description
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`'MarkerSize'` — Marker size

6 (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`'MarkerEdgeColor'` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`

Long Name	Short Name	RGB Triplet
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

'MarkerFaceColor' — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Output Arguments

`h` — `Stair` objects
`Stair` objects

`Stair` objects. These are unique identifiers, which you can use to query and modify the properties of a specific `Stair` object after it is created.

`xb` — x values for use with `plot`
vector or matrix

x values for use with `plot`, returned as a vector or matrix. `xb` contains the appropriate values such that `plot(xb,yb)` creates the stairstep graph.

`yb` — y values for use with `plot`
vector or matrix

y values for use with `plot`, returned as a vector or matrix. `yb` contains the appropriate values such that `plot(xb,yb)` creates the stairstep graph.

See Also

See Also

Functions
`bar` | `histogram` | `LineSpec` | `stem`

Properties
Stair Properties

Topics
"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

Stair Properties

Control stair chart appearance and behavior

Description

`Stair` properties control the appearance and behavior of a `Stair` object. By changing property values, you can modify certain aspects of the stair chart.

Starting in R2014b, you can use dot notation to query and set properties.

```
h = stairs(1:10);
c = h.Color;
h.Color = 'red';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Line

`LineStyle` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`LineWidth` — Line width
`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`Color` — Line color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Line color, specified as an RGB triplet, a character vector of a color name, or `'none'`. The default RGB triplet value of `[0 0 0]` corresponds to black. If you specify the `Color` as `'none'`, then the line is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

Markers

`Marker` — Marker symbol

`'none'` (default) | `'o'` | `'+'` | `'*'` | `'.'` | `'*'` | `...`

Marker symbol, specified as one of the values listed in this table. By default, the object does not display markers. Specifying a marker symbol adds markers at each data point or vertex.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

`MarkerSize` — Marker size

`6` (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

MarkerFaceColor — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]

Long Name	Short Name	RGB Triplet
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.3 0.2 0.1]

Example: 'green'

Data

XData — x values

[ ] (default) | vector

x values, specified as a vector. The input argument X to the stairs function sets the *x* values. If you do not specify the *x* values, then stairs uses the indices of YData. XData and YData must have equal lengths.

Example: 1:10

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | categorical | datetime | duration

YData — y values

[ ] (default) | vector

y values, specified as a vector. The input argument Y to the stairs function sets the *y* values. XData and YData must have equal lengths.

Example: 1:10

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | categorical | datetime | duration

XDataSource — Variable linked to XData

'' (default) | character vector containing MATLAB workspace variable name

Variable linked to XData, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the XData.

By default, there is no linked variable so the value is an empty character vector, ''. If you link a variable, then MATLAB does not update the XData values immediately. To force an update of the data values, use the refreshdata function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'x'`

`YDataSource` — Variable linked to `YData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `YData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `YData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `YData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'y'`

`XDataMode` — Selection mode for `XData`

`'auto'` (default) | `'manual'`

Selection mode for `XData`, specified as one of these values:

- `'auto'` — Use the indices of the values in `YData` (or `ZData` for 3-D plots).
- `'manual'` — Use manually specified values. To specify the values, set the `XData` property or specify the input argument `X` to the plotting function.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects

beneath it. However, the object color depends on the color of whatever is beneath it on the display.

- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'stair'`

This property is read-only.

Type of graphics object, returned as `'stair'`. Use this property to find all objects of a given type within a plotting hierarchy, such as searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[ ]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Stair` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `Stair` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Stair` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Stair` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Stair` object. If you have defined the `UIContextMenu` property, then invoke the context menu.

- `'off'` — Trigger the callbacks for the nearest ancestor of the `Stair` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Stair` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`HitTestArea` — (removed) Extents of clickable area

`'off'` (default) | `'on'`

Note: `HitTestArea` has been removed. Use `PickableParts` instead.

Extents of clickable area, specified as one of these values:

- `'off'` — Click the object to select it. This is the default value.
- `'on'` — Click anywhere within the extent of the object to select it, that is, anywhere within the rectangle that encloses the object.

Example: `'off'`

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Stair` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Stair` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.

- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle

- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`stairs`

Topics

"Access Property Values"
"Graphics Object Properties"

standardizeMissing

Insert standard missing values

Syntax

```
B = standardizeMissing(A,indicator)
B = standardizeMissing(A,indicator,'DataVariables',vars)
```

Description

`B = standardizeMissing(A,indicator)` replaces values specified in `indicator` with standard missing values in an array or table.

Standard missing values depend on the data type:

- `NaN` for `double`, `single`, `duration`, and `calendarDuration`
- `NaT` for `datetime`
- `<missing>` for `string`
- `<undefined>` for `categorical`
- `' '` for `char`
- `{''}` for `cell` of character arrays

`B = standardizeMissing(A,indicator,'DataVariables',vars)` standardizes missing values in the variables specified by `vars` when `A` is a table or timetable.

Examples

Nonstandard Missing Numbers

Create a row vector and replace all instances of `-99` with the standard missing value for `double` data types, `NaN`.

```
A = [0 1 5 -99 8 3 4 -99 16];
```

```
B = standardizeMissing(A,-99)
```

```
B =

     0     1     5   NaN     8     3     4   NaN    16
```

Replace All Instances of Specified Values

Create a table containing `Inf` and `'N/A'` to represent missing values.

```
dblVar = [NaN;3;Inf;7;9];
cellstrVar = {'one';'three';'';'N/A';'nine'};
charVar = ['A';'C';'E';' ';'I'];
categoryVar = categorical({'red';'yellow';'blue';'violet';''});
```

```
A = table(dblVar,cellstrVar,charVar,categoryVar)
```

```
A = 5×4 table
    dblVar    cellstrVar    charVar    categoryVar
    ______    __________    _______    ___________

    NaN       'one'         A          red
      3       'three'       C          yellow
    Inf       ''            E          blue
      7       'N/A'                    violet
      9       'nine'        I          <undefined>
```

Replace all instances of `Inf` with `NaN` and replace all instances of `'N/A'` with the empty character vector, `''`.

```
B = standardizeMissing(A,{Inf,'N/A'})
```

```
B = 5×4 table
    dblVar    cellstrVar    charVar    categoryVar
    ______    __________    _______    ___________

    NaN       'one'         A          red
      3       'three'       C          yellow
    NaN       ''            E          blue
      7       ''                       violet
      9       'nine'        I          <undefined>
```

Replace Only Values in Specified Variables

Replace instances of `Inf` and `'N/A'` occurring in specified variables of a table with the standard missing value indicators.

Create a table containing `Inf` and `'N/A'` to represent missing values.

```
a = {'alpha';'bravo';'charlie';'';'N/A'};
x = [1;NaN;3;Inf;5];
y = [57;732;93;1398;Inf];

A = table(a,x,y)
```

```
A = 5×3 table
        a          x      y
    _________     ___    ____

    'alpha'         1      57
    'bravo'       NaN     732
    'charlie'       3      93
    ''            Inf    1398
    'N/A'           5     Inf
```

For the variables `a` and `x`, replace instances of `Inf` with `NaN` and `'N/A'` with the empty character vector, `''`.

```
B = standardizeMissing(A,{Inf,'N/A'},'DataVariables',{'a','x'})
```

```
B = 5×3 table
        a          x      y
    _________     ___    ____

    'alpha'         1      57
    'bravo'       NaN     732
    'charlie'       3      93
    ''            NaN    1398
    ''              5     Inf
```

`Inf` in the variable `y` remains unchanged because `y` is not included in the `'DataVariables'` name-value pair argument.

Input Arguments

A — Input data

vector | matrix | multidimensional array | table | timetable

Input data, specified as a vector, matrix, multidimensional array, table, or timetable. If A is a timetable, then `ismissing` operates on the table data only and ignores `NaT` and `NaN` values in the vector of row times.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `table` | `timetable` | `categorical` | `datetime` | `duration`

`indicator` — Nonstandard missing value indicator

scalar | vector | cell array

Nonstandard missing-value indicator, specified as a scalar, vector, or cell array. The elements of `indicator` define the values that `standardizeMissing` treats as missing. If A is an array, then `indicator` must be a vector. If A is a table or timetable, then `indicator` can also be a cell array with entries of multiple data types.

The data types specified in `indicator` match data types in the corresponding entries of A. The following are additional data type matches between the elements of `indicator` and elements of A:

- `double` indicators match `double`, `single`, integer, and `logical` entries of A.
- `string` and `char` indicators match `categorical` entries of A.

Example: `B = standardizeMissing(A,'N/A')` replaces the character vector `'N/A'` with the empty character vector, `''`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `datetime` | `duration`

`vars` — Table variables to standardize

variable name | cell array of variable names | numeric vector | logical vector | function handle

Table variables to standardize, specified as a variable name, a cell array of variable names, a numeric vector, a logical vector, or a function handle. `vars` can be one of the following:

- A character vector specifying a single table variable name
- A cell array of character vectors where each element is a table variable name
- A vector of table variable indices
- A logical vector whose elements each correspond to a table variable, where `true` includes the corresponding variable and `false` excludes it
- A function handle that returns a logical scalar, such as `@isnumeric`

Example: `'Age'`

Example: `{'Height','Weight'}`

Example: `@iscategorical`

Data Types: `char` | `cell` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `function_handle`

Output Arguments

B — Standardized array or table

vector | matrix | multidimensional array | table | timetable

Standardized array or table, specified as a vector, matrix, multidimensional array, table, or timetable. B has the same size as A.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell` | `table` | `timetable` | `categorical` | `datetime` | `duration` | `calendarDuration`

Algorithms

`standardizeMissing` treats leading and trailing white space differently for cell arrays of character vectors, character arrays, and categorical arrays.

- For cell arrays of character vectors, `standardizeMissing` does not ignore white space. All character vectors must match exactly a character vector specified in `indicator`.
- For character arrays, `standardizeMissing` ignores trailing white space.

- For categorical arrays, `standardizeMissing` ignores leading and trailing white space.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`fillmissing` | `ismissing` | `rmmissing`

Introduced in R2013b

startsWith

Determine if string starts with pattern

Syntax

```
TF = startsWith(str,pattern)
TF = startsWith(str,pattern,'IgnoreCase',true)
```

Description

`TF = startsWith(str,pattern)` returns `1` (`true`) if `str` starts with the specified pattern, and returns `0` (`false`) otherwise.

If `pattern` is an array containing multiple patterns, then `startsWith` returns `1` if it finds that `str` starts with any element of `pattern`.

`TF = startsWith(str,pattern,'IgnoreCase',true)` ignores case when determining if `str` starts with `pattern`.

Examples

Determine If String Starts with Pattern

Create a string array that contains file names. Determine which file names start with the word `data`.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["abstract.docx","data.tar","code.m"; ...
       "data-analysis.ppt","results.ptx","summary.ppt"]
```

```
str = 2×3 string array
    "abstract.docx"        "data.tar"       "code.m"
    "data-analysis.ppt"    "results.ptx"    "summary.ppt"
```

Return a logical array where the position of each element equal to 1 corresponds to the position of a string in `str` that starts with `data`.

```
pattern = "data";
TF = startsWith(str,pattern)
```

```
TF = 2×3 logical array
   0   1   0
   1   0   0
```

Display the file names that start with `data`. Index back into `str` using `TF`.

```
str(TF)
```

```
ans = 2×1 string array
    "data-analysis.ppt"
    "data.tar"
```

Test Start of String Against Multiple Patterns

Create a string array that contains file names. Determine which file names start with either `abstract` or `data`.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["abstract.docx","data.tar.gz","mycode.m","results.ptx"]
```

```
str = 1×4 string array
    "abstract.docx"    "data.tar.gz"    "mycode.m"    "results.ptx"
```

```
pattern = ["abstract","data"];
TF = startsWith(str,pattern)
```

```
TF = 1×4 logical array
   1   1   0   0
```

Display the strings that start with either `abstract` or `data`. Index back into `str` using `TF`.

```
str(TF)
```

```
ans = 1×2 string array
    "abstract.docx"    "data.tar.gz"
```

Ignore Case When Testing Start of String

Create a string array that contains file names. Determine which file names start with `data`, ignoring case.

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["DATA.TAR.GZ","data.xlsx","SUMMARY.PPT","tmp.gz"]
```

```
str = 1×4 string array
    "DATA.TAR.GZ"    "data.xlsx"    "SUMMARY.PPT"    "tmp.gz"
```

```
pattern = "data";
TF = startsWith(str,pattern,'IgnoreCase',true)
```

```
TF = 1×4 logical array
   1   1   0   0
```

Display the strings that start with `data`. Index back into `str` using `TF`.

```
str(TF)
```

```
ans = 1×2 string array
    "DATA.TAR.GZ"    "data.xlsx"
```

Determine if Character Vector Starts with Pattern

Create a character vector that contains the name of a file. Determine if the name starts with different patterns.

```
chr = 'data-analysis.ppt'
```

```
chr =
'data-analysis.ppt'
```

```
TF = startsWith(chr,'data')
```

```
TF = logical
   1
```

```
TF = startsWith(chr,'test')
```

```
TF = logical
   0
```

- "Create String Arrays"
- "Search and Replace Text"
- "Compare Text"
- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text
string array | character vector | cell array of character vectors

Input string.

Data Types: `string` | `char` | `cell`

`pattern` — Search pattern
string array | character vector | cell array of character vectors

Search pattern, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`contains` | `endsWith` | `find` | `regexp` | `strcmp` | `strfind`

Topics

“Create String Arrays”
“Search and Replace Text”
“Compare Text”
“Test for Empty Strings and Missing Values”

Introduced in R2016b

startup

Start up file for user-defined options

Syntax

```
startup
```

Description

`startup` executes commands of your choosing when the MATLAB program starts.

Create a `startup.m` file in a folder on the MATLAB search path. Add commands you want executed at startup. For example, your `startup.m` file might include physical constants, defaults for graphics properties, engineering conversion factors, or anything else you want predefined in your workspace.

Tips

- To specify the current folder in MATLAB when it starts, set the **Initial working folder** preference, described in "General Preferences".

Algorithms

At startup, MATLAB automatically executes the file `matlabrc.m` and, if it exists on the MATLAB search path, `startup.m`. The file `matlabrc.m`, which is in the *`matlabroot`*`/toolbox/local` folder, is reserved for use by MathWorks and by system administrators on multiuser systems.

See Also

See Also

`finish` | `matlabrc` | `matlabroot` | `path` | `quit` | `userpath`

Topics

"Startup Options in MATLAB Startup File"
Preferences

stats

Return cached values and statistics for `MemoizedFunction` object

Syntax

```
s = stats(mfcn)
```

Description

`s = stats(mfcn)` returns cached values and statistics on the use of a `MemoizedFunction` object.

Examples

Obtain Statistics for Memoized Function

Create a `MemoizedFunction` object by memozing the `plus` function.

```
mf = memoize(@plus)
```

```
mf = 
  MemoizedFunction with properties:

     Function: @plus
      Enabled: 1
    CacheSize: 10
```

Call the memoized function several times. The first time you call the function with a particular set of inputs, MATLAB caches the results.

```
a = mf(13,42);  % calls plus; caches results
b = mf(7,33);   % calls plus; caches results
c = mf(13,42);  % does not call plus; returns cached results
d = mf(5,120);  % calls plus; caches results
e = mf(13,42);  % does not call plus; returns cached results
```

```
f = mf(7,33);   % does not call plus; returns cached results
```

Call the `stats` function.

```
s = stats(mf)
```

```
s = struct with fields:
                    Cache: [1×1 struct]
       MostHitCachedInput: [1×1 struct]
      CacheHitRatePercent: 50
    CacheOccupancyPercent: 30
```

Determine which sets of inputs you used the most.

```
s.MostHitCachedInput
```

```
ans = struct with fields:
     Hits: 2
    Input: {[13]  [42]}
```

Obtain the cached results.

```
c = s.Cache
```

```
c = struct with fields:
         Inputs: {{1×2 cell}  {1×2 cell}  {1×2 cell}}
        Nargout: [1 1 1]
        Outputs: {{1×1 cell}  {1×1 cell}  {1×1 cell}}
       HitCount: [2 1 0]
      TotalHits: 3
    TotalMisses: 3
```

Display all sets of cached inputs and outputs alongside how many times MATLAB accessed the cached values.

```
T = cell2table([c.Inputs' c.Outputs'],'VariableNames',{'Inputs','Outputs'});
T.Times_Cache_Accessed = c.HitCount'
```

```
T = 3×3 table
       Inputs        Outputs    Times_Cache_Accessed
    _____________    _______    ____________________
```

```
    [13]    [ 42]    [ 55]      2
    [ 7]    [ 33]    [ 40]      1
    [ 5]    [120]    [125]      0
```

Input Arguments

`mfcn` — Function with memoization semantics
`MemoizedFunction` object

Function with memoization semantics, specified as a `MemoizedFunction` object.

Output Arguments

`s` — `MemoizedFunction` statistics
structure

`MemoizedFunction` statistics, returned as a structure containing these fields.

Field	Description
`Cache`	Cached results, returned as a structure. If `m` is the number of function calls with cached results, then the structure contains the following fields: • `Inputs` – Cached input values, returned as a `1`-by-`m` cell array. Each element in the `Inputs` cell array is a `1`-by-`n` cell array, where `n` is the number of inputs for a particular function call. • `Outputs` – Cached output values, returned as a `1`-by-`m` cell array. Each element in the `Outputs` cell array is a `1`-by-`p` cell array, where `p` is the number of outputs for a particular function call. • `HitCount` – Number of times each cached set of input values was accessed, returned as `1`-by-`m` `double` array. • `TotalHits` – Total number of times a set of input values was found in the cache, returned as a `double`. • `TotalMisses` – Total number of times a set of input values was not found in the cache, returned as a `double`.

Field	Description
`MostHitCach`	Inputs for the most accessed cached values, returned as a structure. The structure contains the following fields: • `Hits` – Number of times the cached values were accessed, returned as an integer • `Input` – Input values for the most accessed cached values, returned as a cell array of input values
`CacheHitRat`	Percentage of times an input was found in the cache, returned as a double. This property is computed by `(TotalHits/(TotalHits +TotalMisses))*100`.
`CacheOccupa`	How full the cache is, returned as a double representing a percentage. This property is computed by `(Number of cache entries/cache size)*100`.

See Also

See Also

Functions

`memoize`

Using Objects

`MemoizedFunction`

Introduced in R2017a

std

Standard deviation

Syntax

```
S = std(A)
S = std(A,w)
S = std(A,w,dim)
S = std(___,nanflag)
```

Description

`S = std(A)` returns the standard deviation of the elements of `A` along the first array dimension whose size does not equal 1.

- If `A` is a vector of observations, then the standard deviation is a scalar.
- If `A` is a matrix whose columns are random variables and whose rows are observations, then `S` is a row vector containing the standard deviations corresponding to each column.
- If `A` is a multidimensional array, then `std(A)` operates along the first array dimension whose size does not equal 1, treating the elements as vectors. The size of this dimension becomes `1` while the sizes of all other dimensions remain the same.
- By default, the standard deviation is normalized by `N-1`, where `N` is the number of observations.

`S = std(A,w)` specifies a weighting scheme for any of the previous syntaxes. When `w = 0` (default), `S` is normalized by `N-1`. When `w = 1`, `S` is normalized by the number of observations, `N`. `w` also can be a weight vector containing nonnegative elements. In this case, the length of `w` must equal the length of the dimension over which `std` is operating.

`S = std(A,w,dim)` returns the standard deviation along dimension `dim` for any of the previous syntaxes. To maintain the default normalization while specifying the dimension of operation, set `w = 0` in the second argument.

`S = std(___,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. For example, `std(A,'includenan')` includes all `NaN` values in `A` while `std(A,'omitnan')` ignores them.

Examples

Standard Deviation of Matrix Columns

Create a matrix and compute the standard deviation of each column.

```
A = [4 -5 1; 2 3 5; -9 1 7];
S = std(A)
```

```
S =

    7.0000    4.1633    3.0551
```

Standard Deviation of 3-D Array

Create a 3-D array and compute the standard deviation along the first dimension.

```
A(:,:,1) = [2 4; -2 1];
A(:,:,2) = [9 13; -5 7];
A(:,:,3) = [4 4; 8 -3];
S = std(A)
```

```
S =

(:,:,1) =

    2.8284    2.1213


(:,:,2) =

    9.8995    4.2426


(:,:,3) =

    2.8284    4.9497
```

Specify Standard Deviation Weights

Create a matrix and compute the standard deviation of each column according to a weight vector `w`.

```
A = [1 5; 3 7; -9 2];
w = [1 1 0.5];
S = std(A,w)
```

```
S =

    4.4900    1.8330
```

Standard Deviation Along Matrix Rows

Create a matrix and calculate the standard deviation along each row.

```
A = [6 4 23 -3; 9 -10 4 11; 2 8 -5 1];
S = std(A,0,2)
```

```
S =

   11.0303
    9.4692
    5.3229
```

Standard Deviation Excluding NaN

Create a vector and compute its standard deviation, excluding NaN values.

```
A = [1.77 -0.005 3.98 -2.95 NaN 0.34 NaN 0.19];
S = std(A,'omitnan')
```

```
S = 2.2797
```

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array. If A is a scalar, then std(A) returns 0. If A is a 0-by-0 empty array, then std(A) returns NaN.

Data Types: single | double | datetime | duration

Complex Number Support: Yes

w — Weight

0 (default) | 1 | vector

Weight, specified as one of these values:

- 0 — Normalize by N-1, where N is the number of observations. If there is only one observation, then the weight is 1.
- 1 — Normalize by N.
- Vector made up of nonnegative scalar weights corresponding to the dimension of A along which the standard deviation is calculated.

Data Types: single | double

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension dim indicates the dimension whose length reduces to 1. The size(S,dim) is 1, while the sizes of all other dimensions remain the same.

Consider a two-dimensional input array, A.

- If dim = 1, then std(A,0,1) returns a row vector containing the standard deviation of the elements in each column.



std(A,0,1)

- If `dim = 2`, then `std(A,0,2)` returns a column vector containing the standard deviation of the elements in each row.

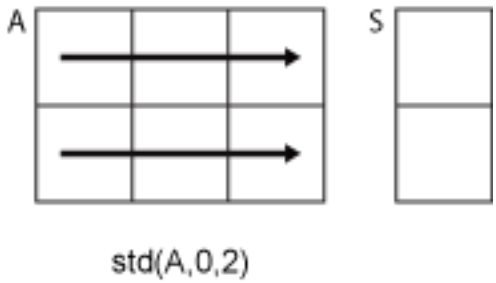

If `dim` is greater than `ndims(A)`, then `std(A)` returns an array of zeros the same size as `A`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition
`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of these values:

- `'includenan'` — Include `NaN` values when computing the standard deviation, resulting in `NaN`.
- `'omitnan'` — Ignore `NaN` values appearing in either the input array or weight vector.

For `datetime` arrays, you can also use `'omitnat'` or `'includenat'` to omit and include `NaT` values, respectively.

Data Types: `char`

Definitions

Standard Deviation

For a random variable vector A made up of N scalar observations, the standard deviation is defined as

$$S = \sqrt{\frac{1}{N-1}\sum_{i=1}^{N}|A_i - \mu|^2} \quad ,$$

where μ is the mean of A:

$$\mu = \frac{1}{N}\sum_{i=1}^{N} A_i.$$

The standard deviation is the square root of the variance. Some definitions of standard deviation use a normalization factor of *N* instead of *N-1*, which you can specify by setting `w` to `1`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

- The weighting scheme cannot be a vector.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you specify `dim`, then it must be a constant.

- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

See Also

`corrcoef` | `cov` | `mean` | `median` | `var`

Introduced before R2006a

stem

Plot discrete sequence data

Syntax

```
stem(Y)
stem(X,Y)
stem(___,'filled')
stem(___,LineSpec)
stem(___,Name,Value)

stem(ax,___)

h = stem(___)
```

Description

`stem(Y)` plots the data sequence, `Y`, as stems that extend from a baseline along the *x*-axis. The data values are indicated by circles terminating each stem.

- If `Y` is a vector, then the *x*-axis scale ranges from 1 to `length(Y)`.
- If `Y` is a matrix, then `stem` plots all elements in a row against the same *x* value, and the *x*-axis scale ranges from 1 to the number of rows in `Y`.

`stem(X,Y)` plots the data sequence, `Y`, at values specified by `X`. The `X` and `Y` inputs must be vectors or matrices of the same size. Additionally, `X` can be a row or column vector and `Y` must be a matrix with `length(X)` rows.

- If `X` and `Y` are both vectors, then `stem` plots entries in `Y` against corresponding entries in `X`.
- If `X` is a vector and `Y` is a matrix, then `stem` plots each column of `Y` against the set of values specified by `X`, such that all elements in a row of `Y` are plotted against the same value.
- If `X` and `Y` are both matrices, then `stem` plots columns of `Y` against corresponding columns of `X`.

`stem( ___ ,'filled')` fills the circles. Use this option with any of the input argument combinations in the previous syntaxes.

`stem( ___ ,LineSpec)` specifies the line style, marker symbol, and color.

`stem( ___ ,Name,Value)` modifies the stem chart using one or more `Name,Value` pair arguments.

`stem(ax, ___ )` plots into the axes specified by `ax` instead of into the current axes (`gca`). The option, `ax`, can precede any of the input argument combinations in the previous syntaxes.

`h = stem( ___ )` returns a vector of `Stem` objects in `h`. Use `h` to modify the stem chart after it is created.

Examples

Plot Single Data Series

Create a stem plot of 50 data values between -2π and 2π.

```
figure
Y = linspace(-2*pi,2*pi,50);
stem(Y)
```

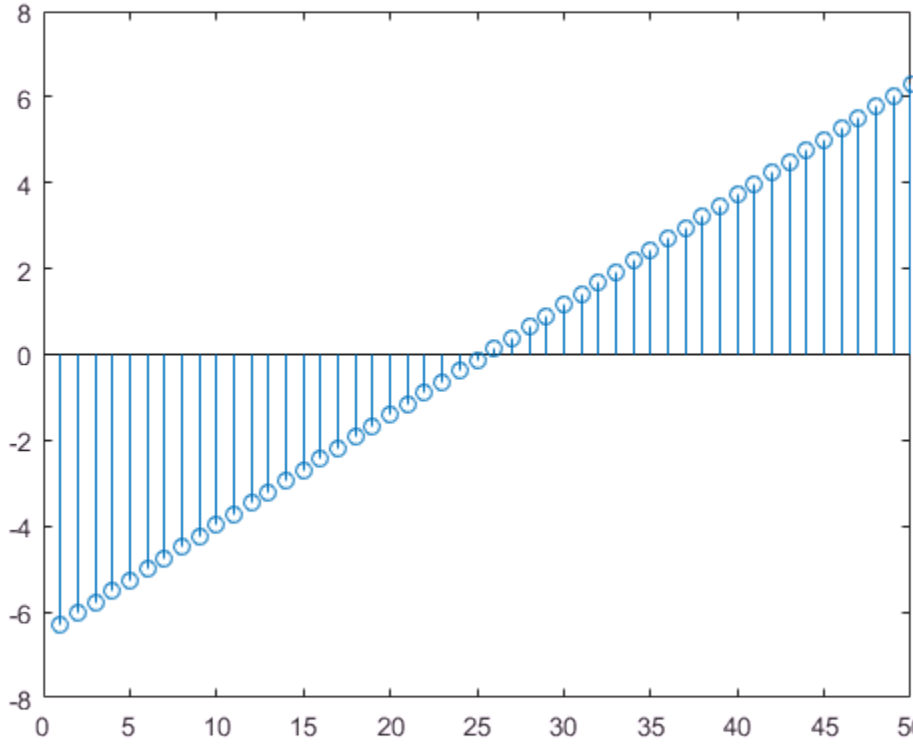

Data values are plotted as stems extending from the baseline and terminating at the data value. The length of `Y` automatically determines the position of each stem on the *x*-axis.

Plot Multiple Data Series

Plot two data series using a two-column matrix.

```
figure
X = linspace(0,2*pi,50)';
Y = [cos(X), 0.5*sin(X)];
stem(Y)
```

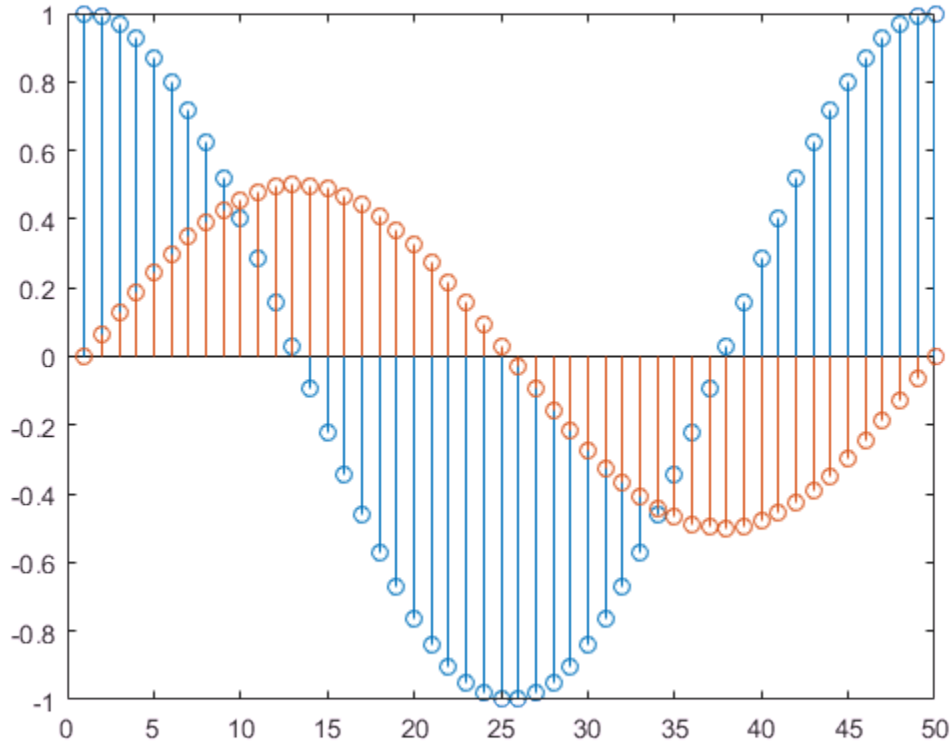

Each column of Y is plotted as a separate series, and entries in the same row of Y are plotted against the same *x* value. The number of rows in Y automatically generates the position of each stem on the *x*-axis.

Plot Single Data Series at Specified x values

Plot 50 data values of cosine evaluated between 0 and 2π and specify the set of *x* values for the stem plot.

```
figure
X = linspace(0,2*pi,50)';
Y = cos(X);
```

```
stem(X,Y)
```

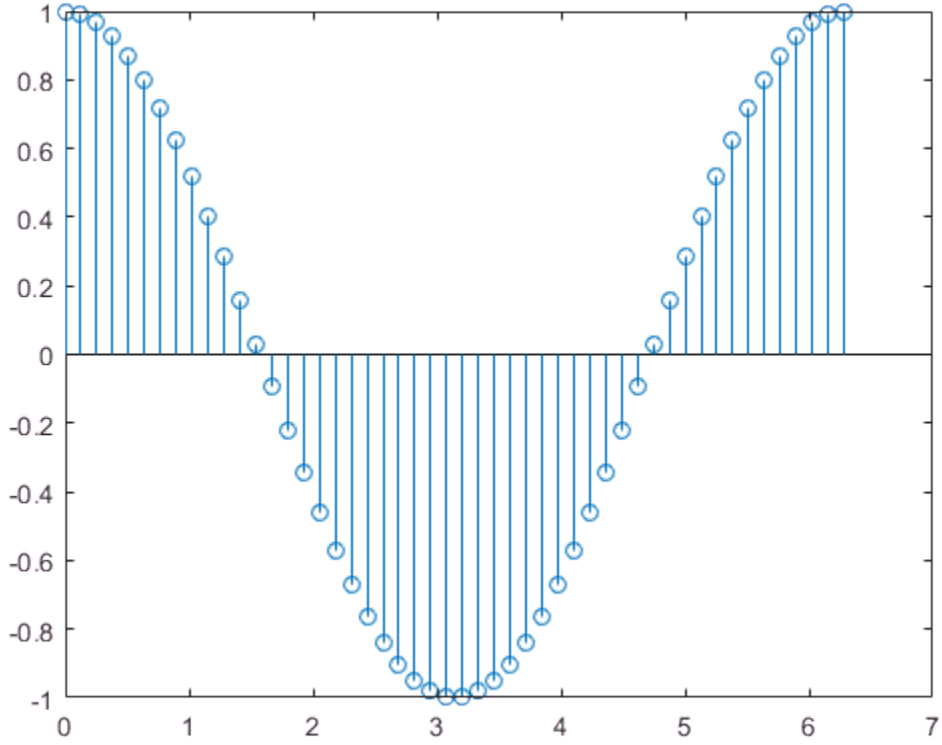

The first vector input determines the position of each stem on the *x*-axis.

Plot Multiple Data Series at Specified x values

Plot 50 data values of sine and cosine evaluated between 0 and 2π and specify the set of *x* values for the stem plot.

```
figure
X = linspace(0,2*pi,50)';
```

```
Y = [cos(X), 0.5*sin(X)];
stem(X,Y)
```

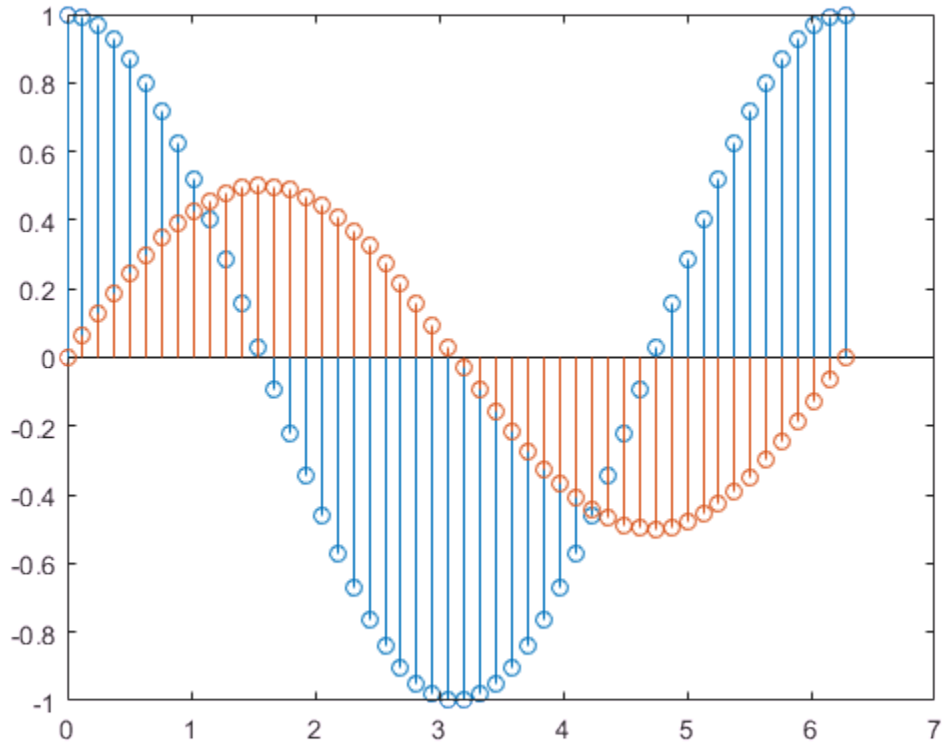

The vector input determines the *x*-axis positions for both data series.

Plot Multiple Data Series at Unique Sets of x values

Plot 50 data values of sine and cosine evaluated at different sets of *x* values. Specify the corresponding sets of *x* values for each series.

```
figure
x1 = linspace(0,2*pi,50)';
```

```
x2 = linspace(pi,3*pi,50)';
X = [x1, x2];
Y = [cos(x1), 0.5*sin(x2)];
stem(X,Y)
```

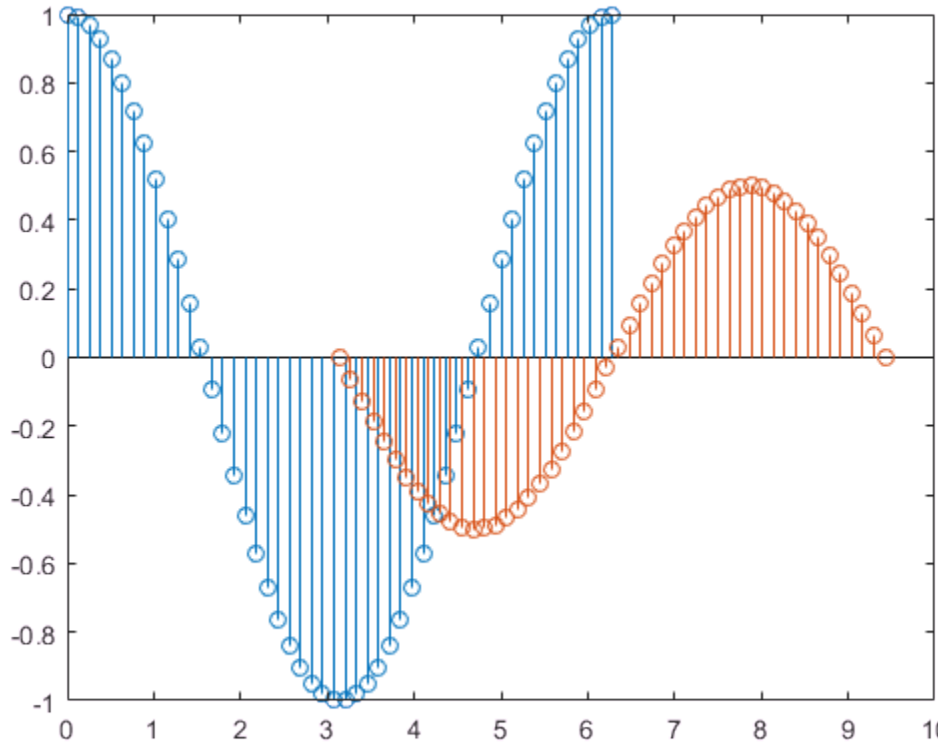

Each column of X is plotted against the corresponding column of Y.

Fill in Plot Markers

Create a stem plot and fill in the circles that terminate each stem.

```
X = linspace(0,10,20)';
```

```
Y = (exp(0.25*X));
stem(X,Y,'filled')
```

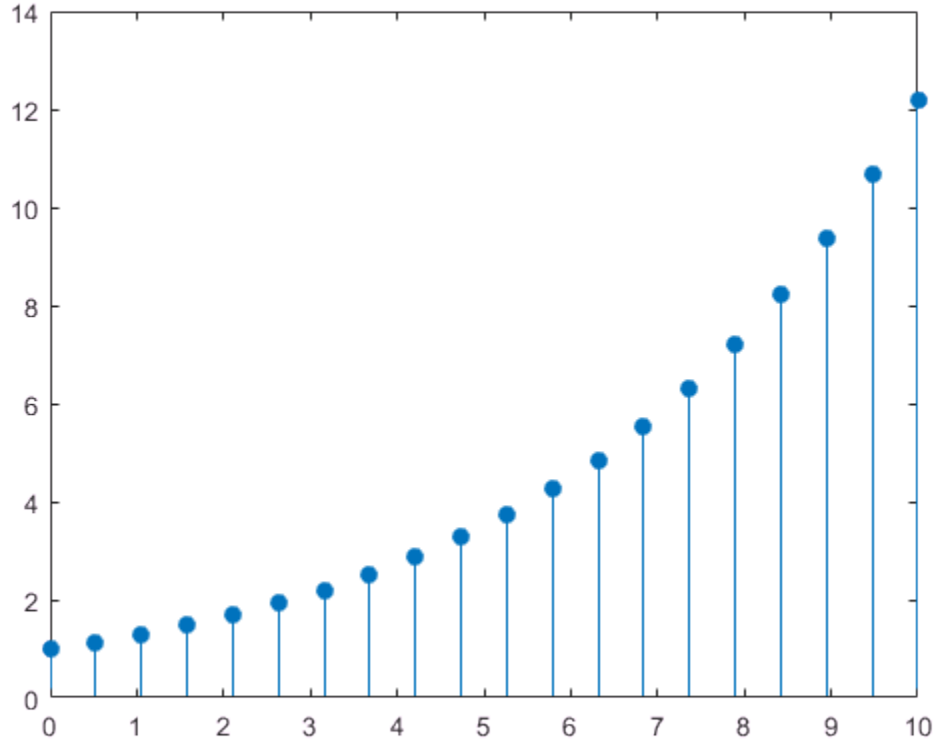

Specify Stem and Marker Options

Create a stem plot and set the line style to a dotted line, the marker symbols to diamonds, and the color to red using the `LineSpec` option.

```
figure
X = linspace(0,2*pi,50)';
Y = (exp(X).*sin(X));
```

```
stem(X,Y,':diamondr')
```

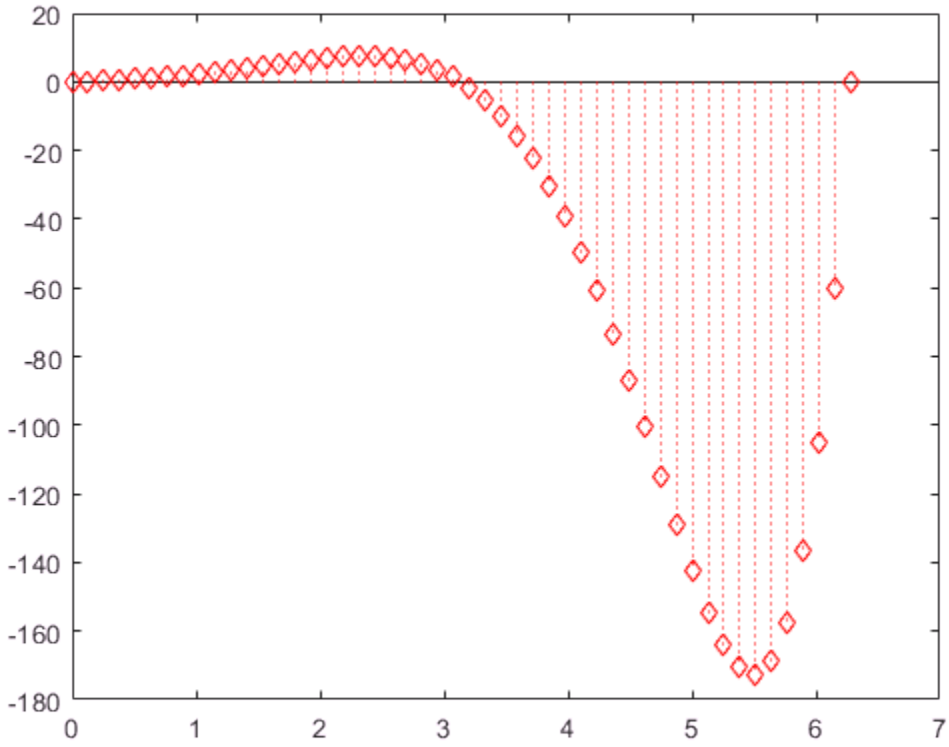

To color the inside of the diamonds, use the `'fill'` option.

Specify Additional Stem and Marker Options

Create a stem plot and set the line style to a dot-dashed line, the marker face color to red, and the marker edge color to green using `Name,Value` pair arguments.

```
figure
X = linspace(0,2*pi,25)';
Y = (cos(2*X));
stem(X,Y,'LineStyle','-.',...
```

```
'MarkerFaceColor','red',...
'MarkerEdgeColor','green')
```

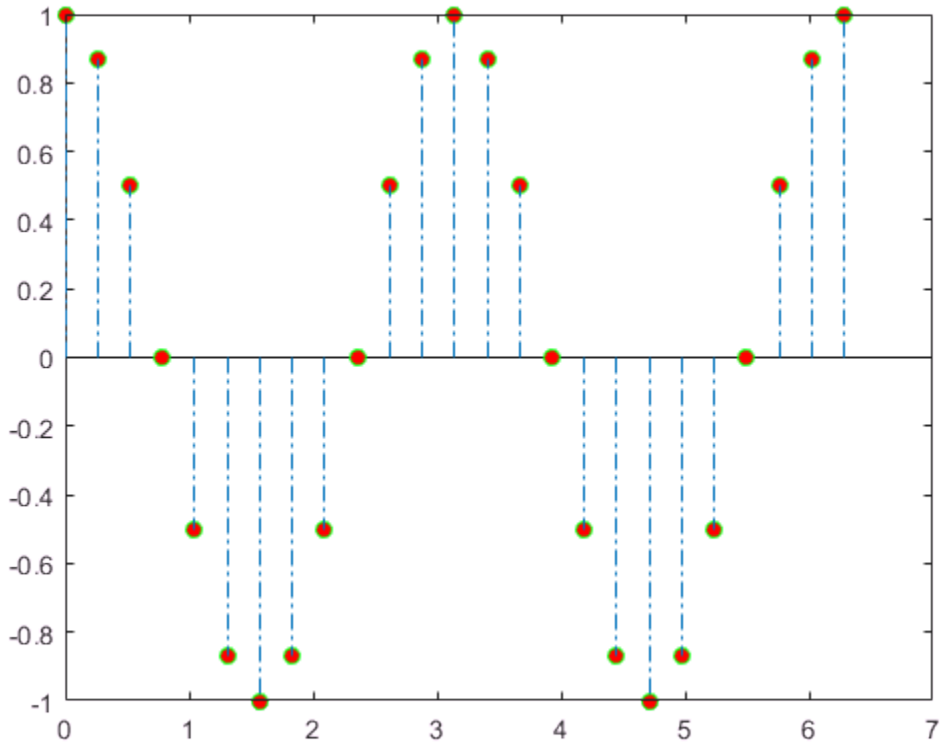

The stem remains the default color.

Specify Axes for Stem Plot

Create a figure with two subplots and return the handles to each axes, `s(1)` and `s(2)`. Create a stem plot in the lower subplot by referring to its axes handle, `s(2)`.

```
figure
s(1) = subplot(2,1,1);
s(2) = subplot(2,1,2);
```

```
X = 0:25;
Y = [exp(0.1*X); -exp(.05*X)]';
stem(s(2),X,Y)
```

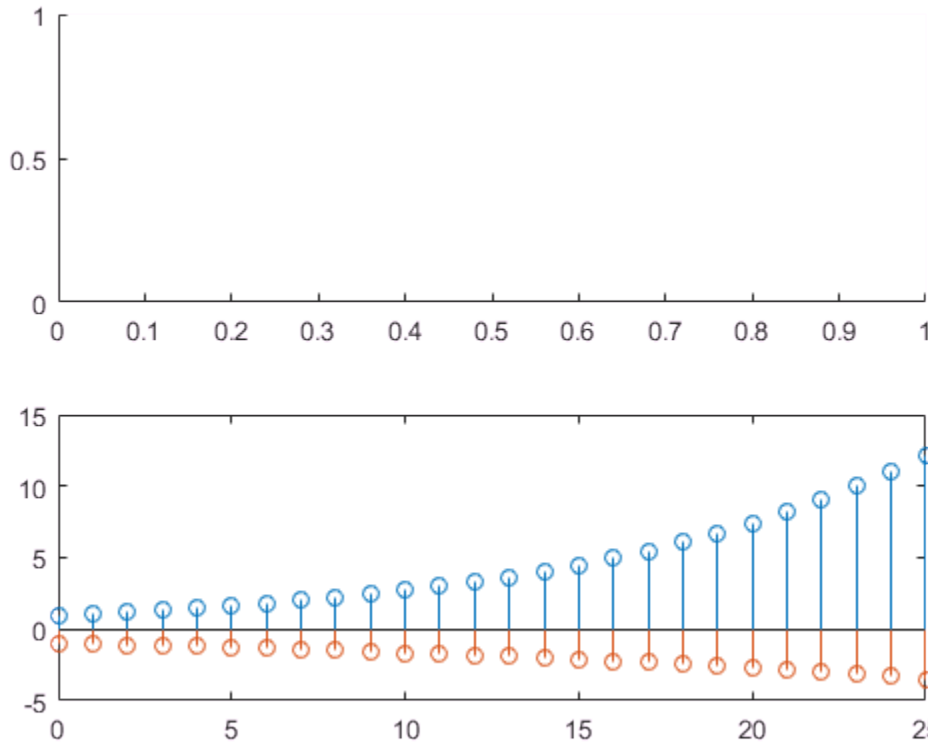

Modify Stem Series After Creation

Create a stem plot.

```
X = 0:25;
Y = [cos(X); exp(0.05*X)]';
h = stem(X,Y);
```

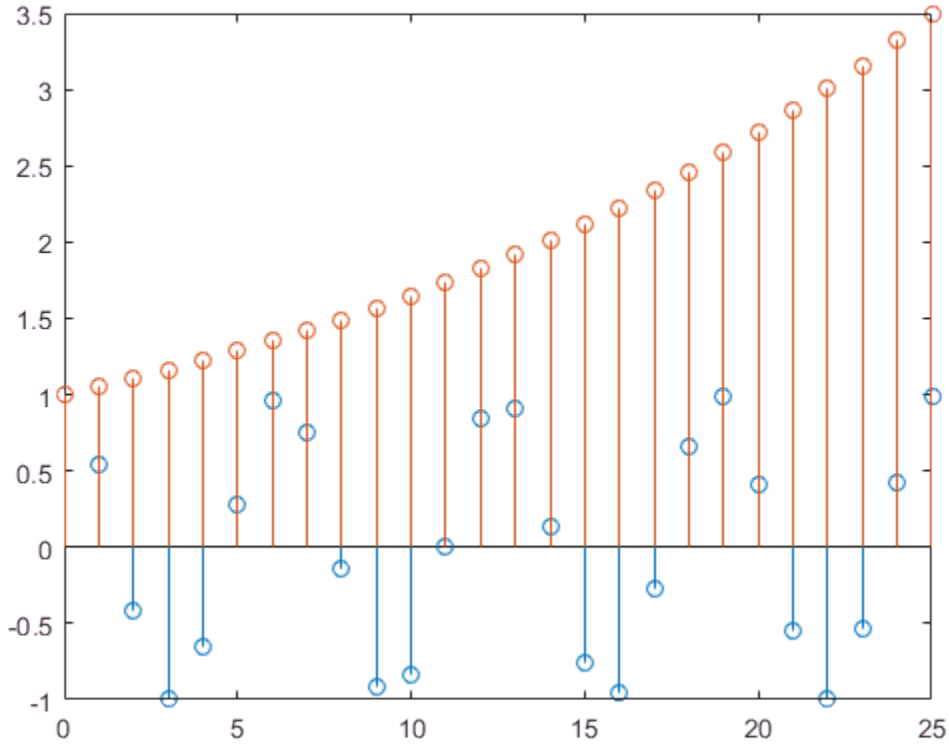

The `stem` function creates a stem series object for each column of data. The output argument, `h`, contains the two stem series objects.

Set the first stem series color to green. Change the markers of the second stem series to squares. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
h(1).Color = 'green';
h(2).Marker = 'square';
```

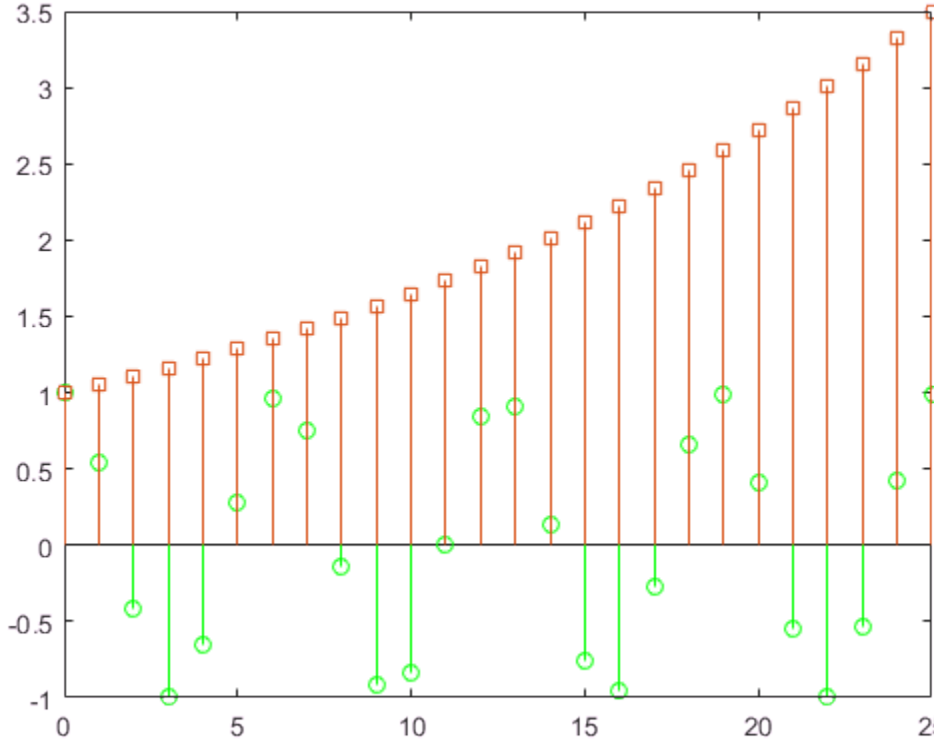

Adjust Baseline Properties

Create a stem plot and change properties of the baseline.

```
X = linspace(0,2*pi,50);
Y = exp(0.3*X).*sin(3*X);
h = stem(X,Y);
```

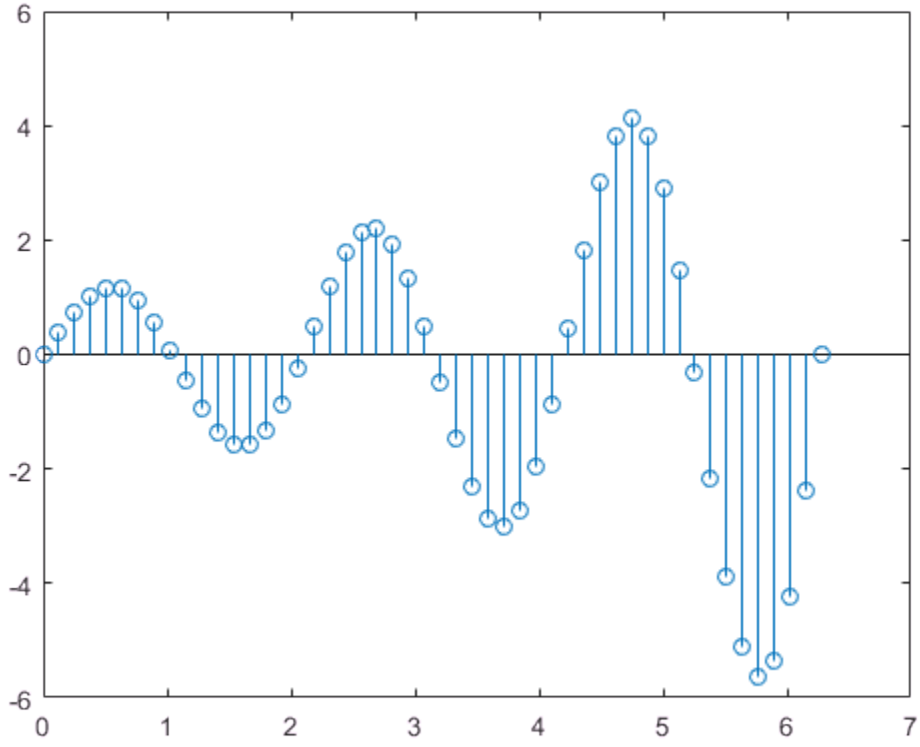

Change the line style of the baseline. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
hbase = h.BaseLine;
hbase.LineStyle = '--';
```

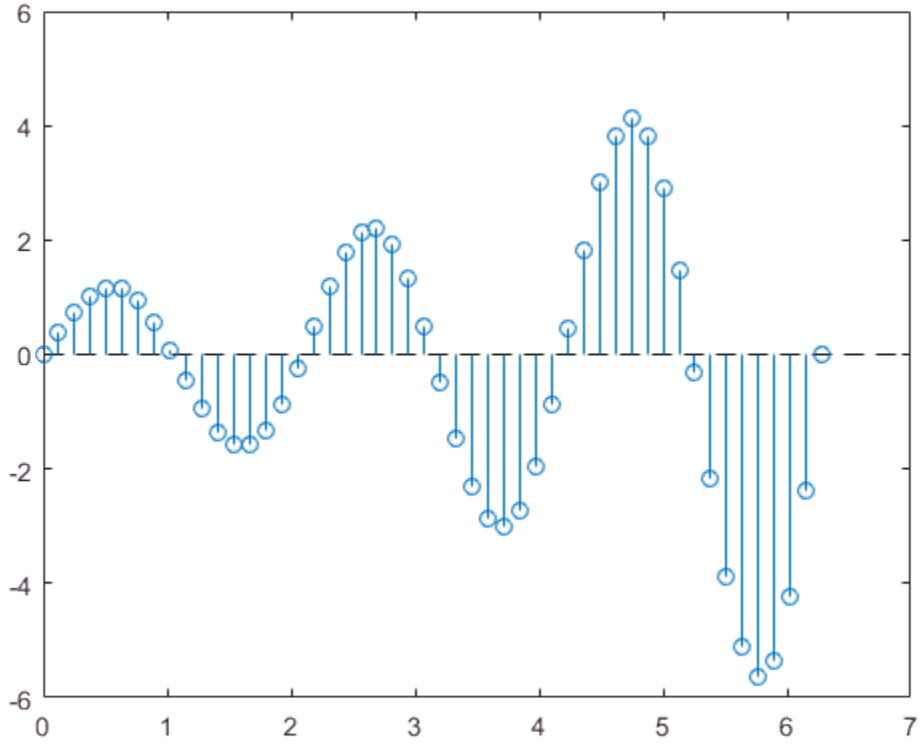

Hide the baseline by setting its `Visible` property to `'off'` .

```
hbase.Visible = 'off';
```

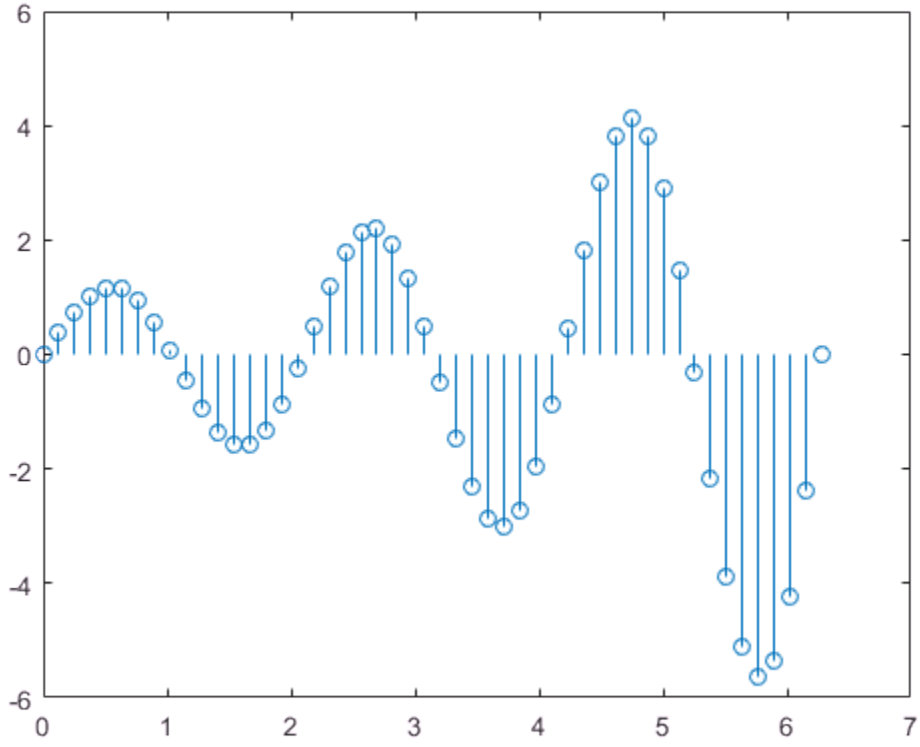

Change Baseline Level

Create a stem plot with a baseline level at 2.

```
X = linspace(0,2*pi,50)';
Y = (exp(0.3*X).*sin(3*X));
stem(X,Y,'BaseValue',2);
```

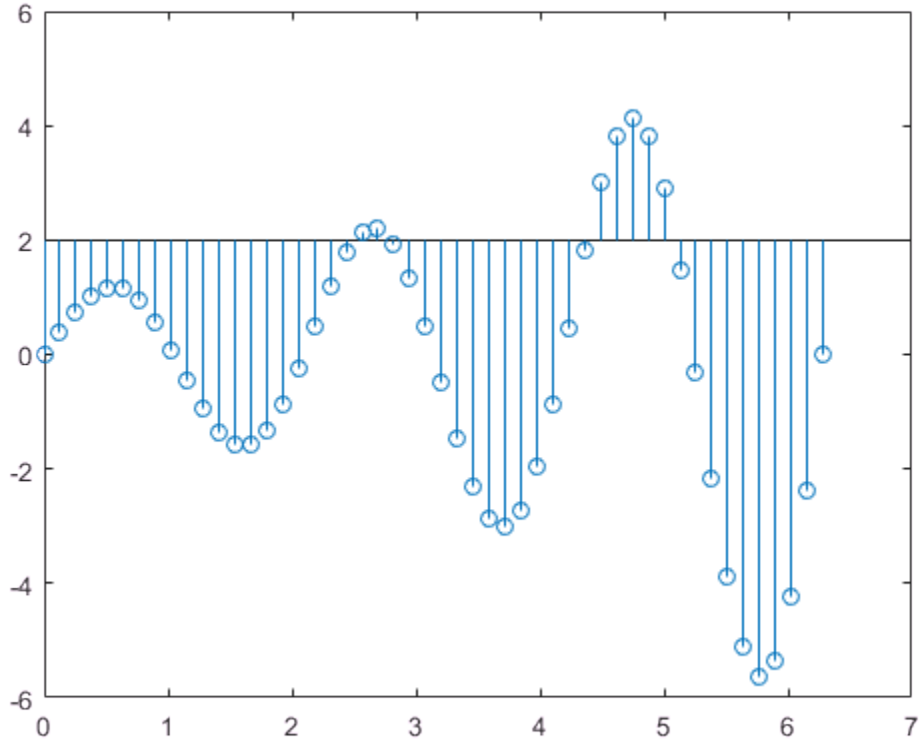

- “Combine Line and Stem Plots”
- “Plot Dates and Durations”
- “Plot Categorical Data”

Input Arguments

Y — Data sequence to display
vector or matrix

Data sequence to display, specified as a vector or matrix. When `Y` is a vector, `stem` creates one `Stem` object. When `Y` is a matrix, `stem` creates a separate `Stem` object for each column.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`X` — Locations to plot data values in `Y`

vector or matrix

Locations to plot data values in `Y`, specified as a vector or matrix. When `Y` is a vector, `X` must be a vector of the same size. When `Y` is a matrix, `X` must be a matrix of the same size, or a vector whose length equals the number of rows in `Y`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`LineSpec` — Line style, marker, and color

character vector of symbols

Line style, marker, and color, specified as a character vector of symbols. For more information, see `LineSpec`.

Example: `':*r'`

`ax` — `Axes` object

`Axes` object

`Axes` object. If you do not specify the axes, then `stem` plots into the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'LineStyle',':','MarkerFaceColor','red'` plots the stem as a dotted line and colors the marker face red.

The `Stem` properties listed here are only a subset. For a complete list, see Stem Properties.

`'LineStyle'` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width

`0.5` (default) | positive value

Line width, specified as a positive value in points. If the line has markers, then the line width also affects the marker edges.

Example: `0.75`

`'Color'` — Stem color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Stem color, specified as an RGB triplet, a character vector of color name, or `'none'`. If you specify the `Color` as `'none'`, then the stems are invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`

Long Name	Short Name	RGB Triplet
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

'Marker' — Marker symbol

'o' (default) | '+' | '*' | '.' | 'x' | ...

Marker symbol, specified as one of the markers listed in this table.

Value	Description
'o'	Circle
'+'	Plus sign
'*'	Asterisk
'.'	Point
'x'	Cross
'square' or 's'	Square
'diamond' or 'd'	Diamond
'^'	Upward-pointing triangle
'v'	Downward-pointing triangle
'>'	Right-pointing triangle
'<'	Left-pointing triangle
'pentagram' or 'p'	Five-pointed star (pentagram)
'hexagram' or 'h'	Six-pointed star (hexagram)
'none'	No markers

Example: '+'

Example: 'diamond'

'MarkerSize' — Marker size
6 (default) | positive value

Marker size, specified as a positive value in points.

Example: 10

'MarkerEdgeColor' — Marker outline color
'auto' (default) | 'none' | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- 'auto' — Use the same color specified in the Color property.
- 'none' — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

'MarkerFaceColor' — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.3 0.2 0.1]

Example: 'green'

Output Arguments

h — Stem objects

Stem objects

Stem objects. These are unique identifiers, which you can use to modify the properties of a specific Stem object after it is created.

See Also

See Also

Functions

`bar` | `LineSpec` | `plot` | `stairs`

Properties

Stem Properties

Topics

"Combine Line and Stem Plots"
"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

stem3

Plot 3-D discrete sequence data

Syntax

```
stem3(Z)
stem3(X,Y,Z)
stem3(___,'filled')
stem3(___,LineSpec)
stem3(___,Name,Value)

stem3(ax,___)

h = stem3(___)
```

Description

`stem3(Z)` plots entries in `Z` as stems extending from the *xy*-plane and terminating with circles at the entry values. The stem locations in the *xy*-plane are automatically generated.

`stem3(X,Y,Z)` plots entries in `Z` as stems extending from the *xy*-plane where `X` and `Y` specify the stem locations in the *xy*-plane. The inputs `X`, `Y`, and `Z` must be vectors or matrices of the same size.

`stem3(___,'filled')` fills the circles. Use this option with any of the input argument combinations in the previous syntaxes.

`stem3(___,LineSpec)` specifies the line style, marker symbol, and color.

`stem3(___,Name,Value)` modifies the stem chart using one or more name-value pair arguments.

`stem3(ax,___)` plots into the axes specified by `ax` instead of into the current axes (`gca`). The option, `ax`, can precede any of the input argument combinations in the previous syntaxes.

`h = stem3( ___ )` returns the `Stem` object `h`.

Examples

Row Vector Input

Create a 3-D stem plot of cosine values between $-\pi/2$ and $\pi/2$ with a row vector input.

```
figure
X = linspace(-pi/2,pi/2,40);
Z = cos(X);
stem3(Z)
```

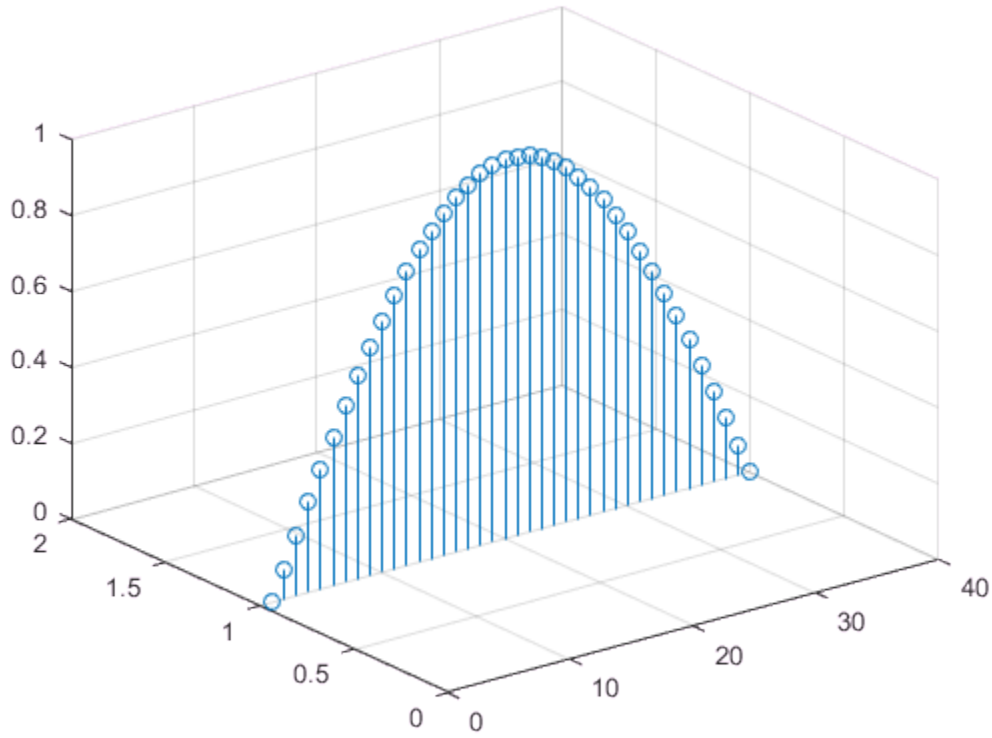

`stem3` plots elements of `Z` against the same *y* value at equally space *x* values.

Column Vector Input

Create a 3-D stem plot of cosine values between $-\pi/2$ and $\pi/2$ with a column vector input.

```
figure
X = linspace(-pi/2,pi/2,40)';
Z = cos(X);
stem3(Z)
```

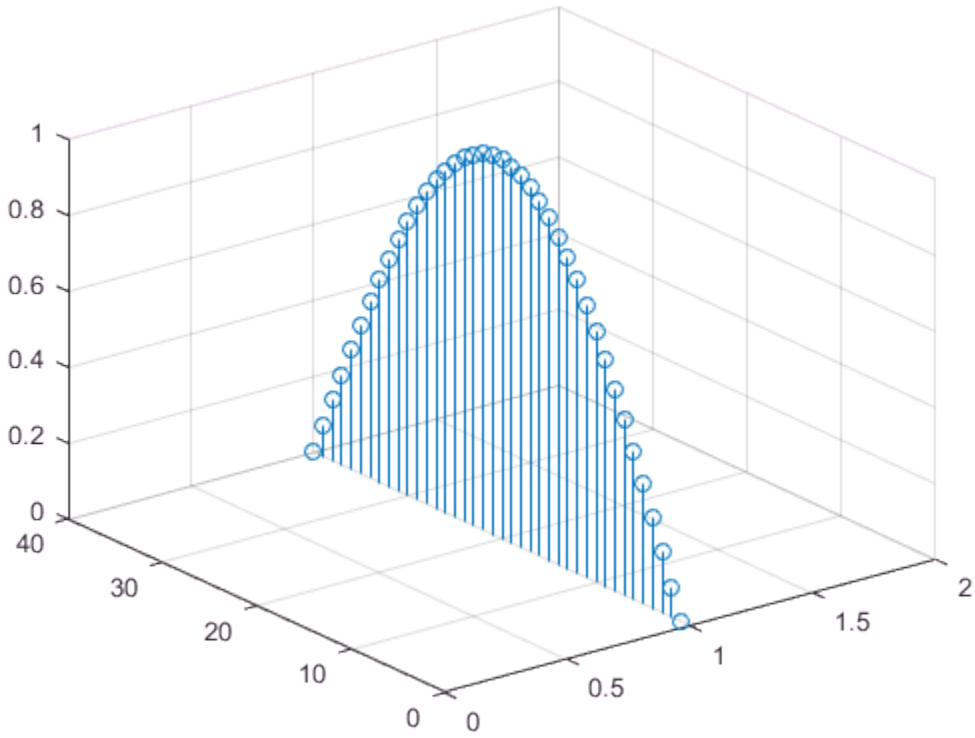

`stem3` plots elements of `Z` against the same *x* value at equally space *y* values.

Matrix Input

Create a 3-D stem plot of sine and cosine values between $-\pi/2$ and $\pi/2$ with a matrix input.

```
figure
X = linspace(-pi/2,pi/2,40);
Z = [sin(X); cos(X)];
stem3(Z)
```

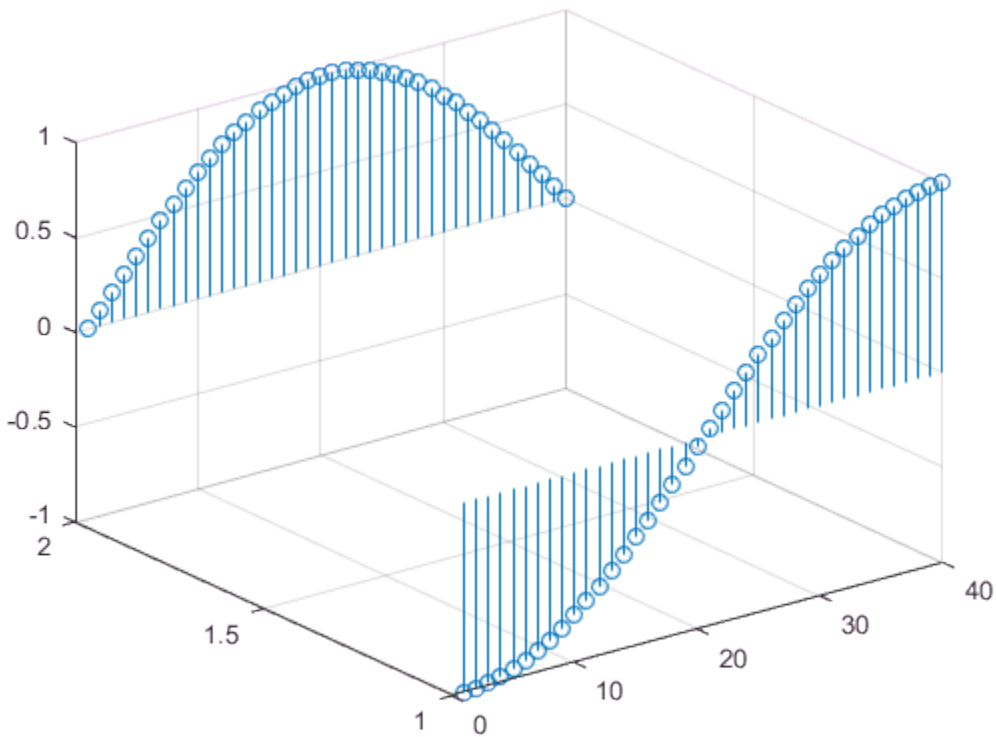

`stem3` plots each row of `Z` against the same *y* value at equally space *x* values.

Specify Stem Locations with Vector Inputs

Create a 3-D stem plot and specify the stem locations along a curve. Use `view` to adjust the angle of the axes in the figure.

```
figure
X = linspace(-5,5,60);
Y = cos(X);
Z = X.^2;
stem3(X,Y,Z)
view(-8,30)
```

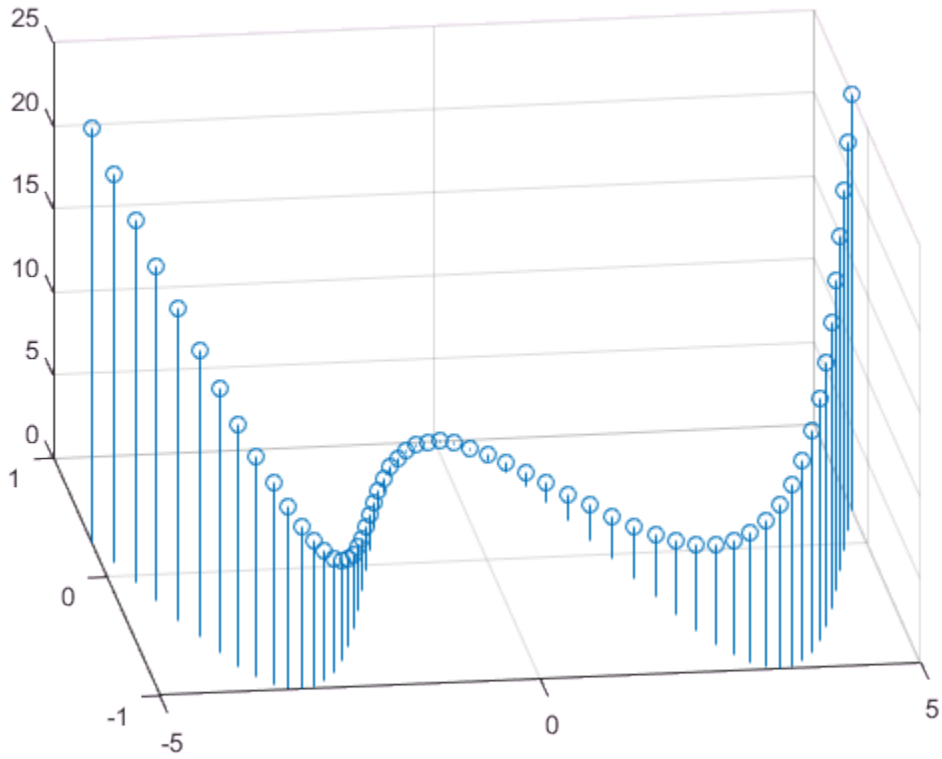

`X` and `Y` determine the stem locations. `Z` determines the marker heights.

Specify Stem Locations with Matrix Inputs

Create a 3-D stem plot with matrix data and specify the stem locations in the *xy*-plane.

```
figure
[X,Y] = meshgrid(0:.1:1);
Z = exp(X+Y);
stem3(X,Y,Z)
```

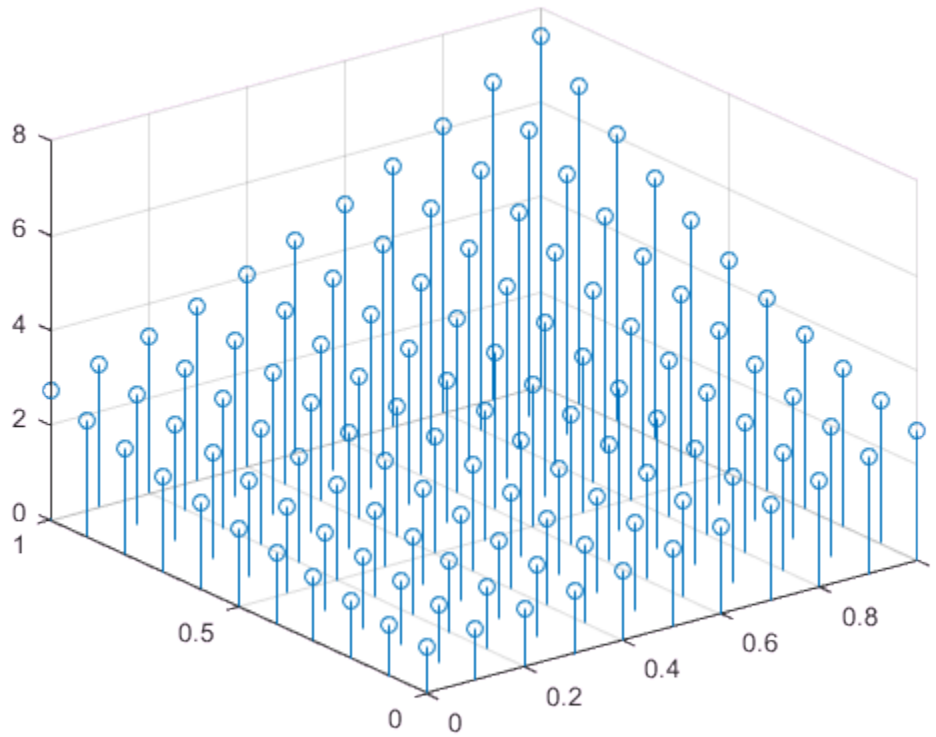

X and Y determine the stem locations. Z determines the marker heights.

Fill in Markers

Create a 3-D stem plot of cosine values between $-\pi$ and π and fill in the markers.

```
X = linspace(-pi,pi,40);
Z = cos(X);
stem3(Z,'filled')
```

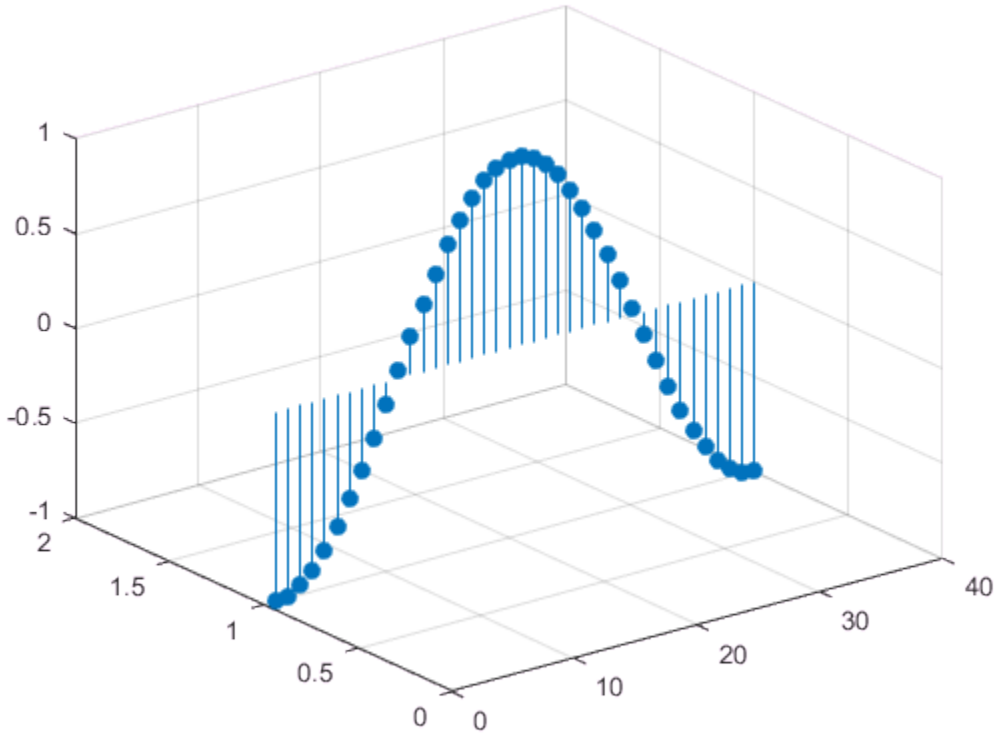

Line Style, Marker Symbol, and Color Options

Create a 3-D stem plot of cosine values between $-\pi$ and π. Use a dashed line style for the stem, set the marker symbols to stars, and set the color to magenta.

```
figure
X = linspace(-pi,pi,40);
Z = cos(X);
```

```
stem3(Z,'--*m')
```

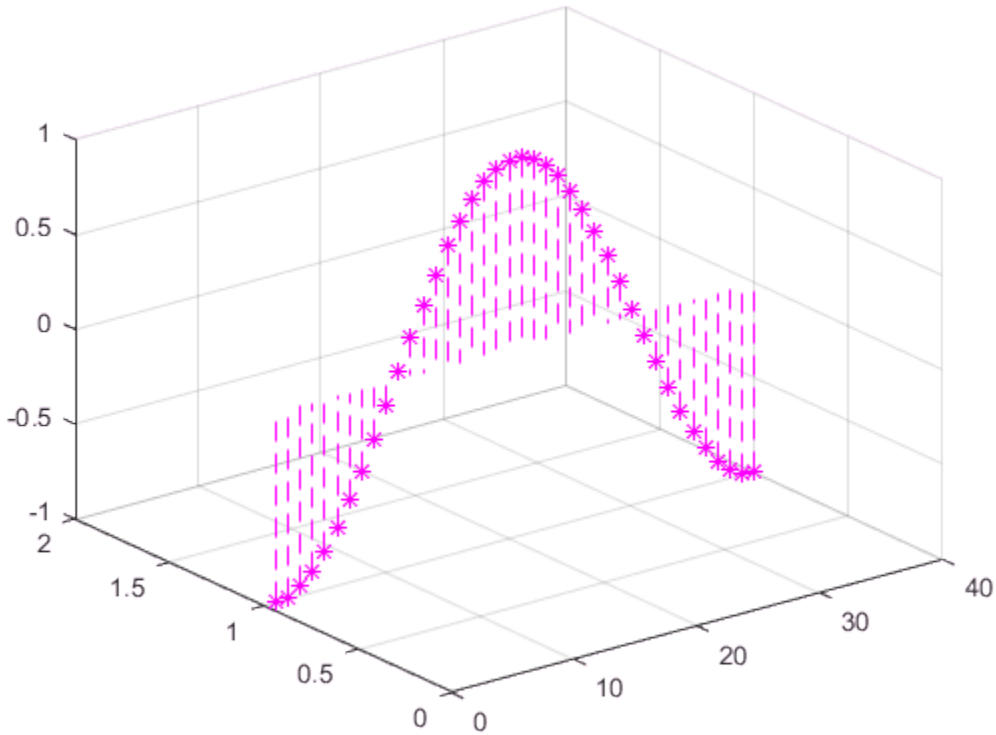

To specify only two of the three `LineSpec` options, omit the third option from the character vector. For example, `'*m'` sets the marker symbol and the color and uses the default line style.

Line Style, Marker Symbol, and Color Options

Create a 3-D stem plot and specify the stem locations along a circle. Set the stem to a dotted line style, the marker symbols to stars, and the color to magenta.

```
figure
theta = linspace(0,2*pi);
```

```
X = cos(theta);
Y = sin(theta);
Z = theta;
stem3(X,Y,Z,':*m')
```

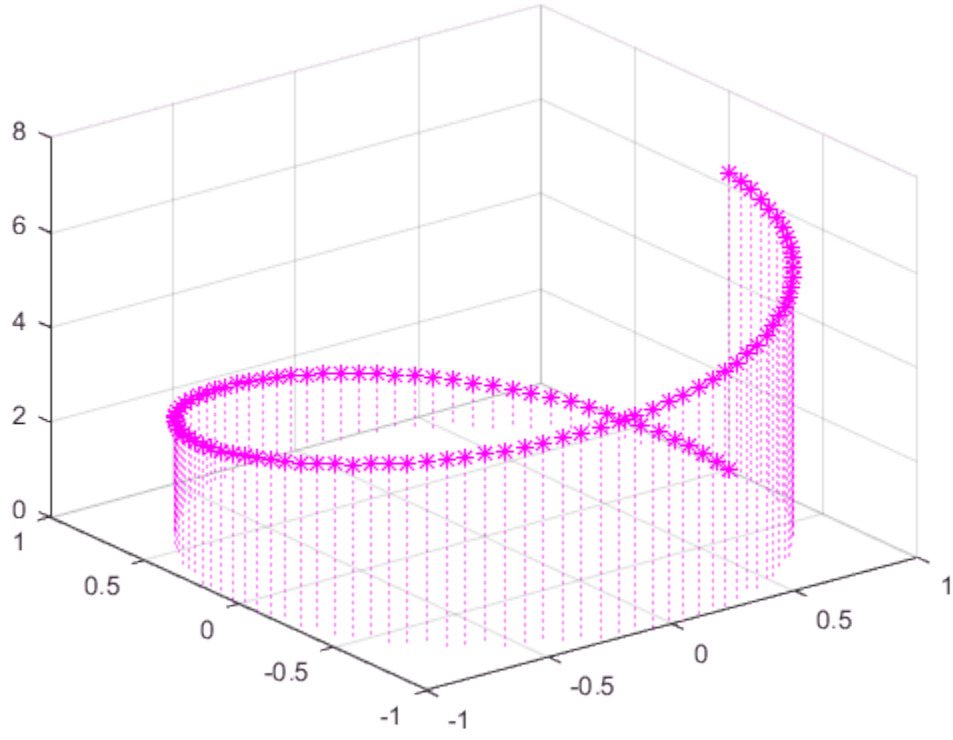

X and Y determine the stem locations. Z determines the marker heights.

Additional Style Options

Create a 3-D stem plot of cosine values between $-\pi$ and π. Set the marker symbols to squares with green faces and magenta edges.

```
figure
```

```
X = linspace(-pi,pi,40);
Z = cos(X);
stem3(Z,'Marker','s',...
     'MarkerEdgeColor','m',...
     'MarkerFaceColor','g')
```

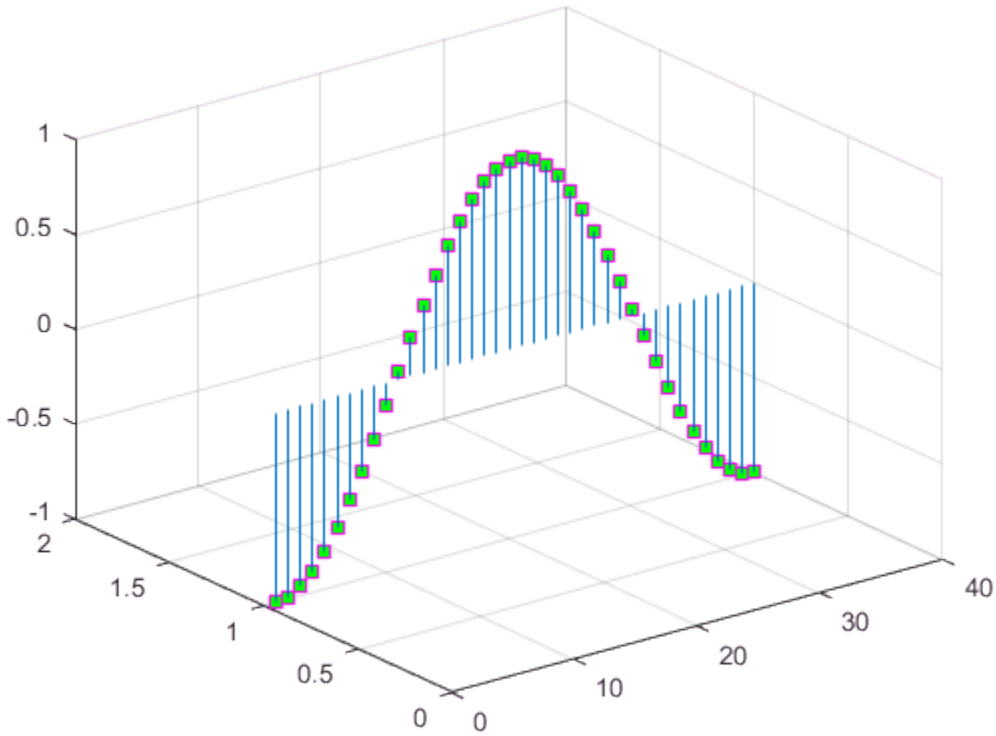

Axes Handles

Specify the axes for a 3-D stem plot.

Define vectors X, Y and Z.

```
X = linspace(-2,2,50);
```

```
Y = X.^3;
Z = exp(X);
```

Create a figure with two subplots and return the handles to each axes, `s(1)` and `s(2)`. Plot a 3-D stem plot in the lower subplot by referring to its axes handle, `s(2)`. For comparison, plot a 2-D stem plot in the upper subplot by referring to its axes handle, `s(1)`.

```
figure
s(1) = subplot(2,1,1);
s(2) = subplot(2,1,2);

stem(s(1),X,Z)
stem3(s(2),X,Y,Z)
```

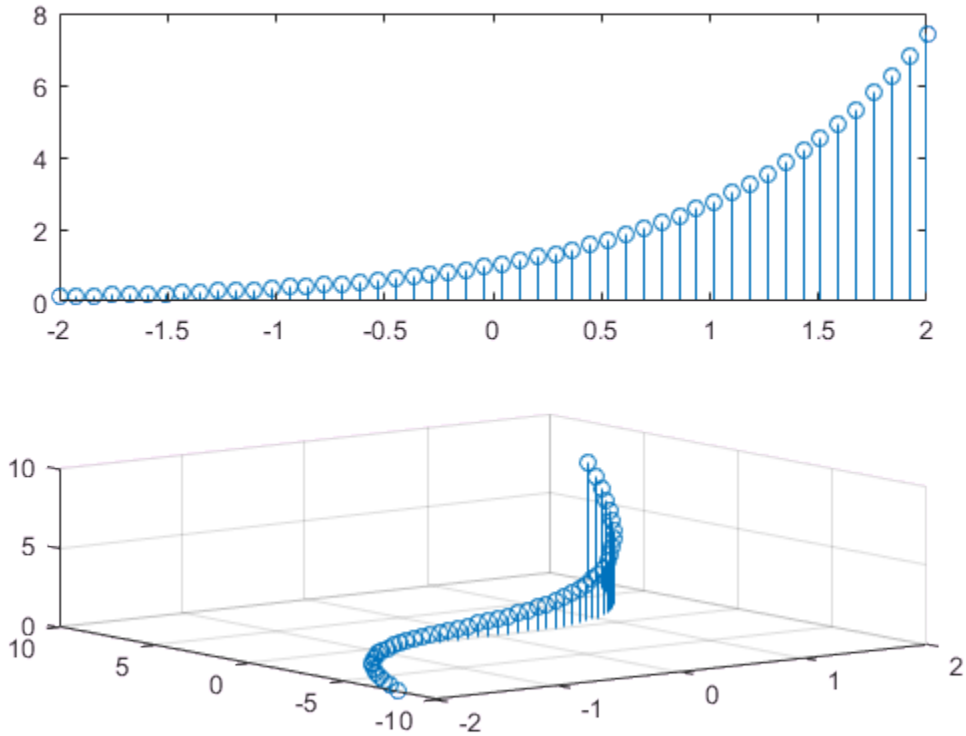

Modify Stem Series After Creation

Create a 3-D stem plot and return the stem series object.

```
X = linspace(0,2);
Y = X.^3;
Z = exp(X).*cos(Y);
h = stem3(X,Y,Z,'filled');
```

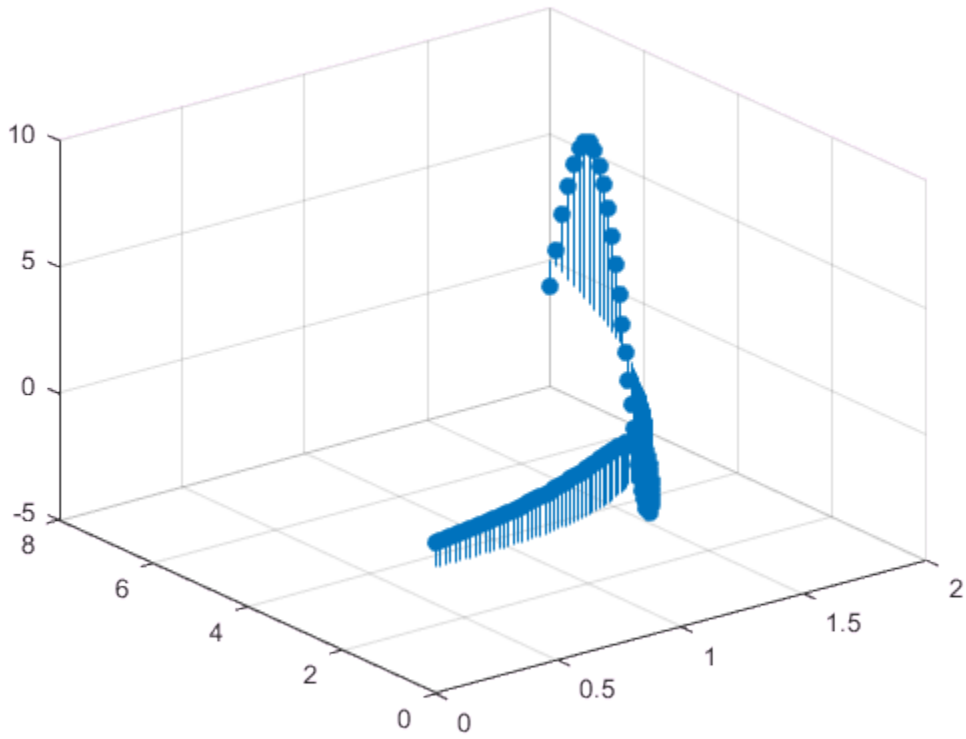

Change the color to magenta and set the marker face color to yellow. Use `view` to adjust the angle of the axes in the figure. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
h.Color = 'm';
h.MarkerFaceColor = 'y';
view(-10,35)
```

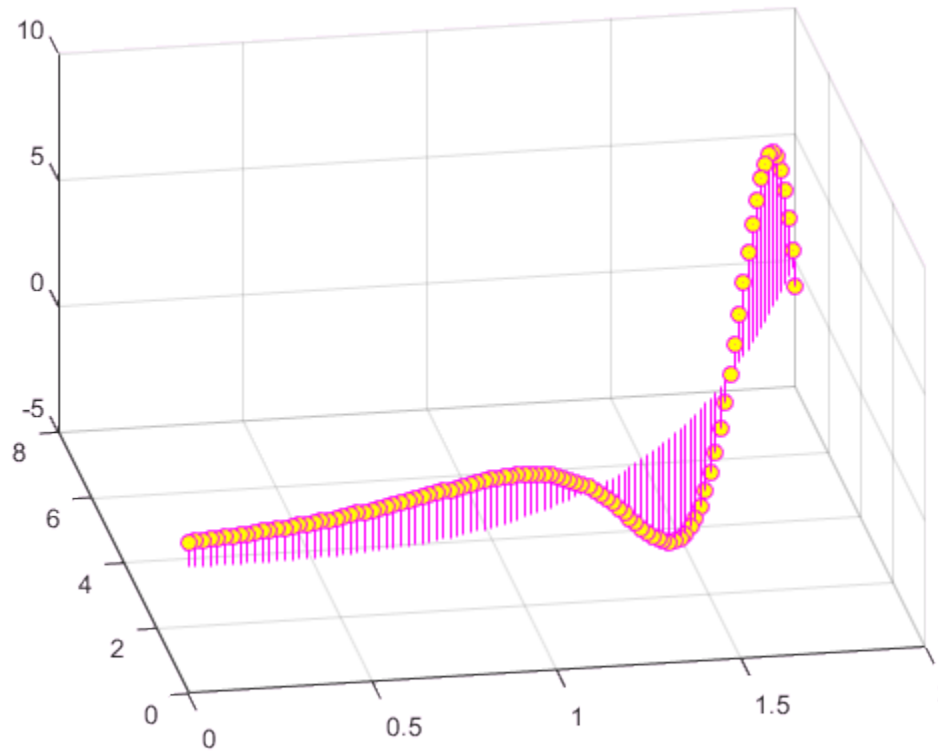

- "Combine Line and Stem Plots"

Input Arguments

Z — Data sequence to display
vector or matrix

Data sequence to display, specified as a vector or matrix. `stem3` plots each element in `Z` as a stem extending from the *xy*-plane and terminating at the data value.

- If `Z` is a row vector, `stem3` plots all elements against the same *y* value at equally spaced *x* values.
- If `Z` is a column vector, `stem3` plots all elements against the same *x* value at equally spaced *y* values.
- If `Z` is a matrix, `stem3` plots each row of `Z` against the same *y* value at equally spaced *x* values.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`X` — Locations to plot values of `Z`

vector or matrix

Locations to plot values of`Z`, specified as a vector or a matrix. Inputs `X`, `Y` and `Z` must be vectors or matrices of the same size.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`Y` — Locations to plot values of `Z`

vector or matrix

Locations to plot values of `Z`, specified as a vector or a matrix. Inputs `X`, `Y` and `Z` must be vectors or matrices of the same size.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical`

`LineSpec` — Line style, marker, and color

character vector of symbols

Line style, marker, and color, specified as a character vector of symbols. For more information, see `LineSpec`.

Example: `':*r'`

Data Types: `char`

`ax` — Axes object

axes object

Axes object. If you do not specify the axes, then `stem` plots into the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'LineStyle',':','MarkerFaceColor','red'` plots the stem as a dotted line and sets the marker face color to red.

The properties listed here are only a subset. For a complete list, see Stem Properties.

`'LineStyle'` — Line style
`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'LineWidth'` — Line width of stem and marker edge
`0.5` (default) | positive value

Line width of stem and marker edge, specified as a positive value in point units.

Example: `0.75`

`'Color'` — Stem color
`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Stem color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you specify the `Color` as `'none'`, then the stems are invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'Marker'` — Marker symbol

`'o'` (default) | `'+'` | `'*'` | `'.'` | `'x'` | ...

Marker symbol, specified as one of the markers listed in this table.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle

Value	Description
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'+'`

Example: ‘`diamond`’

`'MarkerSize'` — Marker size

`6` (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`'MarkerEdgeColor'` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`

Long Name	Short Name	RGB Triplet
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.5 0.5 0.5]

Example: 'blue'

'MarkerFaceColor' — Marker fill color

'none' (default) | 'auto' | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- 'none' — Use no color, which makes the interior invisible.
- 'auto' — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.3 0.2 0.1]

Example: `'green'`

Output Arguments

`h` — `Stem` object
`Stem`

`Stem` object. This is a unique identifier, which you can use to modify the properties of the `Stem` object after it is created.

See Also

See Also

Functions
`bar` | `plot` | `stairs` | `stem`

Properties
Stem Properties

Topics
"Combine Line and Stem Plots"

Introduced before R2006a

Stem Properties

Control stem chart appearance and behavior

Description

`Stem` properties control the appearance and behavior of a `Stem` object. By changing property values, you can modify certain aspects of the stem chart.

Starting in R2014b, you can use dot notation to query and set properties.

```
h = stem(1:10);
c = h.Color;
h.Color = 'red';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Stems

`Color` — Stem color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Stem color, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you specify the `Color` as `'none'`, then the stems are invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`

Long Name	Short Name	RGB Triplet
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`LineStyle` — Stem line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Stem line style, specified as one of the line styles listed in this table.

Line Style	Description
`'-'`	Solid line
`'--'`	Dashed line
`':'`	Dotted line
`'-.'`	Dash-dotted line
`'none'`	No stems

Example: `'--'`

`LineWidth` — Line width of stem and marker edge

`0.5` (default) | scalar numeric value greater than 0

Line width of stem and marker edge, specified as a scalar numeric value greater than 0 in point units. The default line width is `0.5` points.

Example: `0.75`

Markers

`Marker` — Marker symbol

`'o'` (default) | `'+'` | `'*'` | `'.'` | `'x'` | ...

Marker symbol, specified as one of the markers listed in this table.

Value	Description
`'o'`	Circle
`'+'`	Plus sign
`'*'`	Asterisk
`'.'`	Point
`'x'`	Cross
`'square'` or `'s'`	Square
`'diamond'` or `'d'`	Diamond
`'^'`	Upward-pointing triangle
`'v'`	Downward-pointing triangle
`'>'`	Right-pointing triangle
`'<'`	Left-pointing triangle
`'pentagram'` or `'p'`	Five-pointed star (pentagram)
`'hexagram'` or `'h'`	Six-pointed star (hexagram)
`'none'`	No markers

Example: `'+'`

Example: ‘`diamond`’

`MarkerSize` — Marker size

`6` (default) | positive value

Marker size, specified as a positive value in points.

Example: `10`

`MarkerEdgeColor` — Marker outline color

`'auto'` (default) | `'none'` | RGB triplet | character vector of color name

Marker outline color, specified as one of these values:

- `'auto'` — Use the same color specified in the `Color` property.
- `'none'` — Use no color, which makes unfilled markers invisible.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.5 0.5]`

Example: `'blue'`

`MarkerFaceColor` — Marker fill color

`'none'` (default) | `'auto'` | RGB triplet | character vector of color name

Marker fill color, specified as one of these values:

- `'none'` — Use no color, which makes the interior invisible.
- `'auto'` — Use the same color as the Color property for the axes.
- RGB triplet or character vector of a color name — Use the specified color.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `[0.3 0.2 0.1]`

Example: `'green'`

Baseline

`BaseValue` — Baseline value

0 (default) | numeric scalar value

Baseline value, specified as a numeric scalar value.

The baseline value that you specify applies to either the *x*-axis or the *y*-axis depending on the bar chart orientation. If you change the orientation of the bar chart from vertical to horizontal, or vice versa, the baseline value might change. Set the `BaseValue` property after setting the `Horizontal` property.

`ShowBaseLine` — Baseline visibility

`'on'` (default) | `'off'`

Baseline visibility, specified as one of these values:

- `'on'` — Show the baseline.
- `'off'` — Hide the baseline.

`BaseLine` — Baseline

baseline object

This property is read-only.

Baseline object. For a list of baseline properties, see Baseline Properties.

Data

`XData` — Values along x-axis

[ ] (default) | vector

Values along the *x*-axis, specified as a vector.

- For 2-D stem charts, the input argument `X` to the `stem` function determines the *x*-values. If you do not specify `X`, then `stem` uses the indices of `YData` as the *x*-values. `XData` and `YData` must have equal lengths.
- For 3-D stem charts, the input argument `X` to the `stem3` function determines the *x*-values. If you do not specify `X`, then `stem3` uses the indices of `ZData` as the *x*-values. `XData`, `YData`, and `ZData` must have equal lengths.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`YData` — Values along y-axis

[ ] (default) | vector

Values along the *y*-axis, specified as a vector.

- For 2-D stem charts, the input argument `Y` to the `stem` function determines the *y*-values. `YData` defines the stem heights. `XData` and `YData` must have equal lengths.
- For 3-D stem charts, the input argument `Y` to the `stem3` function determines the *y*-values. `YData` defines the locations of the stems along the *y*-axis. `XData`, `YData`, and `ZData` must have equal lengths.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ZData` — Values along z-axis

[ ] (default) | vector

Values along the *z*-axis, specified as a vector.

- For 2-D stem charts, `ZData` is empty by default.
- For 3-D stem charts, the input argument `Z` to the `stem3` function determines the *z*-values. `XData`, `YData`, and `ZData` must have equal lengths.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`XDataSource` — Variable linked to `XData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `XData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `XData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `XData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'x'`

`YDataSource` — Variable linked to `YData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `YData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `YData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `YData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'y'`

`ZDataSource` — Variable linked to `ZData`

`''` (default) | character vector containing MATLAB workspace variable name

Variable linked to `ZData`, specified as a character vector containing a MATLAB workspace variable name. MATLAB evaluates the variable in the base workspace to generate the `ZData`.

By default, there is no linked variable so the value is an empty character vector, `''`. If you link a variable, then MATLAB does not update the `ZData` values immediately. To force an update of the data values, use the `refreshdata` function.

Note: If you change one data source property to a variable that contains data of a different dimension, you might cause the function to generate a warning and not render the graph until you have changed all data source properties to appropriate values.

Example: `'z'`

`XDataMode` — Selection mode for `XData`

`'auto'` (default) | `'manual'`

Selection mode for `XData`, specified as one of these values:

- `'auto'` — Use the indices of the values in `YData` (or `ZData` for 3-D plots).
- `'manual'` — Use manually specified values. To specify the values, set the `XData` property or specify the input argument `X` to the plotting function.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of object to axes limits

`'on'` (default) | `'off'`

Clipping of the object to the axes limits, specified as one of these values:

- `'on'` — Do not display parts of the object that are outside the axes limits.
- `'off'` — Display the entire object, even if parts of it appear outside the axes limits. Parts of the object might appear outside the axes limits if you create a plot, set `hold on`, freeze the axis scaling, and then create the object so that it is larger than the original plot.

The `Clipping` property of the axes that contains the object must be set to `'on'`, otherwise this property has no effect. For more information about the clipping behavior, see the Clipping property of the axes.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`, or `'background'` can look different on screen than on paper. On screen, MATLAB

mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'stem'` (default)

This property is read-only.

Type of graphics object, returned as `'stem'`. Use this property to find all objects of a given type within a plotting hierarchy, such as searching for the type using `findobj`.

`Tag` — User-specified tag

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

Data Types: `char`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

`DisplayName` — Text used for legend label

`''` (default) | character vector

Text used for the legend label, specified as a character vector. If you do not specify the text, then the legend uses a label of the form `'dataN'`. The legend does not display until you call the `legend` command.

Example: `'Label Text'`

`Annotation` — Control for including or excluding object from legend

`Annotation` object

This property is read-only.

Control for including or excluding the object from a legend, returned as an `Annotation` object. Set the underlying `IconDisplayStyle` property to one of these values:

- `'on'` — Include the object in the legend (default).
- `'off'` — Do not include the object in the legend.

For example, exclude a stem chart from the legend.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
s.Annotation.LegendInformation.IconDisplayStyle = 'off';
legend('show')
```

Alternatively, you can control the items in a legend using the `legend` function. Specify the first input argument as a vector of the graphics objects to include.

```
p = plot(1:10,'DisplayName','Line Chart');
hold on
s = stem(1:10,'DisplayName','Stem Chart');
hold off
legend(p)
```

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks when visible. The `Visible` property must be set to `'on'` and you must click a part of the `Stem` object that has a defined color. You cannot click a part that has an associated color property set to `'none'`. If the plot contains markers, then the entire marker is clickable if either the edge or the fill has a defined color. The `HitTest` property determines if the `Stem` object responds to the click or if an ancestor does.
- `'none'` — Cannot capture mouse clicks. Clicking the `Stem` object passes the click to the object below it in the current view of the figure window. The `HitTest` property of the `Stem` object has no effect.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Stem` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Stem` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Stem` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`HitTestArea` — (removed) Extents of clickable area

`'off'` (default) | `'on'`

Note: `HitTestArea` has been removed. Use `PickableParts` instead.

Extents of clickable area, specified as one of these values:

- `'off'` — Click the object to select it. This is the default value.
- `'on'` — Click anywhere within the extent of the object to select it, that is, anywhere within the rectangle that encloses the object.

Example: `'off'`

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Stem` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Stem` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments

- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status
`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also
`stem` | `stem3`

Topics
"Access Property Values"
"Graphics Object Properties"

stopasync

Stop asynchronous read and write operations

Syntax

```
stopasync(obj)
```

Description

`stopasync(obj)` stops any asynchronous read or write operation that is in progress for the serial port object, `obj`.

Tips

You can write data asynchronously using the `fprintf` or `fwrite` function. You can read data asynchronously using the `readasync` function, or by configuring the `ReadAsyncMode` property to `continuous`. In-progress asynchronous operations are indicated by the `TransferStatus` property.

If `obj` is an array of serial port objects and one of the objects cannot be stopped, the remaining objects in the array are stopped and a warning is returned. After an object stops:

- Its `TransferStatus` property is configured to `idle`.
- Its `ReadAsyncMode` property is configured to `manual`.
- The data in its output buffer is flushed.

Data in the input buffer is not flushed. You can return this data to the MATLAB workspace using any of the synchronous read functions. If you execute the `readasync` function, or configure the `ReadAsyncMode` property to `continuous`, then the new data is appended to the existing data in the input buffer.

See Also

`fwrite` | `readasync` | `fprintf` | `ReadAsyncMode` | `TransferStatus`

Introduced before R2006a

str2double

Convert string to double precision value

Syntax

```
X = str2double(str)
```

Description

`X = str2double(str)` converts the text in `str` to double precision values. `str` contains text that represents real or complex numeric values. `str` can be a character vector, a cell array of character vectors, or a string array. If `str` is a character vector or string scalar, then `X` is a numeric scalar. If `str` is a cell array of character vectors or a string array, then `X` is a numeric array that is the same size as `str`.

Text that represents a number can contain digits, a comma (thousands separator), a decimal point, a leading `+` or `-` sign, an `e` preceding a power of 10 scale factor, and an `i` or a `j` for a complex unit. You cannot use a period as a thousands separator, or a comma as a decimal point.

If `str2double` cannot convert text to a number, then it returns a `NaN` value.

Examples

Convert Character Vectors to Numbers

Convert character vectors that represent numbers to double precision values. You can also convert a cell array of character vectors to a numeric array of the same size.

Convert a character vector to a real number.

```
X = str2double('3.1416')
```

```
X = 3.1416
```

Convert a character vector when it represents a number using exponential notation.

```
X = str2double('2.998e8')
```

```
X = 299800000
```

Convert a character vector that uses a comma as the thousands separator.

```
X = str2double('1,200.34')
```

```
X = 1.2003e+03
```

Convert a character vector to a complex number.

```
X = str2double('3.14 + 2.7i')
```

```
X =
   3.1400 + 2.7000i
```

Convert a cell array of character vectors to a numeric array.

```
str = {'2.718','3.1416';
       '137','0.015'};
X = str2double(str)
```

```
X =

    2.7180    3.1416
  137.0000    0.0150
```

Convert String Arrays to Numeric Arrays

Starting in R2016b, you can create string arrays using the `string` function. You can convert strings to numbers using the `str2double` function.

Create a string that represents a number. Convert it to a numeric scalar.

```
str = string('81470.5')
```

```
str =
"81470.5"
```

```
X = str2double(str)
```

```
X = 8.1471e+04
```

Create a string array representing numbers. Convert it to a numeric array that is the same size.

```
str = string({'91.57','95.95','3.57';
              '79.22','65.57','84.91'})
```

```
str = 2×3 string array
    "91.57"    "95.95"    "3.57"
    "79.22"    "65.57"    "84.91"
```

```
X = str2double(str)
```

```
X =

   91.5700   95.9500    3.5700
   79.2200   65.5700   84.9100
```

Input Arguments

`str` — Text that represents numbers
character vector | cell array of character vectors | string array

Text that represents numbers, specified as a character vector, a cell array of character vectors, or a string array.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input text must be specified as a character vector. Cell arrays are not supported.
- Generated code always returns a complex result.

See Also

See Also

`cast` | `char` | `hex2num` | `num2str` | `str2num`

Introduced before R2006a

str2func

Construct function handle from character vector

Syntax

```
fh = str2func(c)
```

Description

`fh = str2func(c)` constructs a function handle, `fh`, from a function name or a character vector that defines an anonymous function.

Function handles created using `str2func` do not have access to variables outside of their local workspace or to nested functions. If your function handle contains these variables or functions, MATLAB throws an error when you invoke the handle. Also, if you use a character vector representation of an anonymous function, the resulting function handle does not have access to private or local functions.

Examples

Convert Character Vector to Function Handle

Convert the character vector `'ones'` to a function handle, and call the `ones` function using the handle.

```
c = 'ones';
fh = str2func(c)
```

```
fh = function_handle with value:
    @ones
```

```
fh(1,5)
```

```
ans =

     1     1     1     1     1
```

Convert Character Vector to Handle to Anonymous Function

Convert a character vector that represents an anonymous function to a function handle. Workspace variables are not available to the `str2func` function. Therefore, include values in the character vector that are necessary to evaluate the expression and that are not defined as function inputs.

Define a character vector that represents the anonymous function $7x - 13$. Convert the character vector to a function handle.

```
str = '@(x)7*x-13';
fh = str2func(str)
```

```
fh =

    @(x)7*x-13
```

Call the anonymous function using the handle.

```
fh(3)
```

```
ans =

     8
```

If you include workspace variables in your character vector, `str2func` creates the function handle, but MATLAB throws an error when you invoke the function handle.

```
a = 13;
str = '@(x)7*x-a';
fh = str2func(str);

fh(3)
```

```
Undefined function or variable 'a'.

Error in @(x)7*x-a
```

Examine Differences Between `str2func` and `eval`

Create a function that returns two function handles used to simulate the roll of dice. The first die (`d1`) returns a number from 1 through 6, but the second die (`d2`) always returns the number 1.

Create the following function in a folder on your MATLAB path. When `str2func` is used with a character vector representing an anonymous function, it does not have access to the local function. Therefore, MATLAB calls the built-in `randi` function, and returns a number from 1 through 6. The `eval` function does have access to the local function, so `d2` uses the overloaded `randi` and always returns 1.

```
function [d1,d2] = diceRoll
str = '@()randi([1 6],1)';
d1 = str2func(str);
d2 = eval(str);
end

function r = randi(~,~)
r = 1;
end
```

At the command prompt, call the `diceRoll` function.

```
[p1,p2] = diceRoll
```

```
p1 =

  function_handle with value:

    @()randi([1,6],1)


p2 =

  function_handle with value:

    @()randi([1,6],1)
```

Both `p1` and `p2` appear to be associated with the same anonymous function.

Invoke the function handles. The result from `p1` varies from 1 through 6. The result from `p2` is always 1.

```
p1()
p2()
```

```
ans =

     5


ans =

     1
```

Input Arguments

c — Character vector to convert to function handle
function name | character vector representation of anonymous function

Character vector to convert to a function handle, specified as a function name or anonymous function character vector.

Example: `str = 'cos'`

Example: `str = '@(x) x.^2'`

Tips

- A function handle that stores variable values does not retain its original value when you use `func2str` to convert it to a character vector, and then convert it back to a handle with `str2func`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

Character vector must be constant/known at compile time.

See Also

See Also

`func2str` | `functions`

Topics

"Create Function Handle"

Introduced before R2006a

str2mat

Form blank-padded character matrix from strings

Note: `str2mat` is not recommended. Use `char` instead.

Syntax

```
S = str2mat(T1, T2, T3, ...)
```

Description

`S = str2mat(T1, T2, T3, ...)` forms the matrix `S` containing the text strings `T1, T2, T3, ...` as rows. The function automatically pads each string with blanks in order to form a valid matrix. Each text parameter, `Ti`, can itself be a string matrix. This allows the creation of arbitrarily large string matrices. Empty strings are significant.

Examples

```
x = str2mat('36842', '39751', '38453', '90307');

whos x
  Name      Size         Bytes  Class

  x         4x5             40  char array

x(2,3)

ans =

    7
```

Tips

`str2mat` differs from `strvcat` in that empty strings produce blank rows in the output. In `strvcat`, empty strings are ignored.

See Also

`char`

Introduced before R2006a

str2num

Convert character array to numeric array

Syntax

```
x = str2num(str)
[x, status] = str2num('str')
```

Description

Note `str2num` uses the `eval` function to convert the input argument. Side effects can occur if the string contains calls to functions. Using `str2double` can avoid some of these side effects.

`x = str2num(str)` converts `str`, a character representation of a numeric value, to a numeric representation. `str2num` also converts character arrays to numeric arrays. If the input argument does not represent a valid number or matrix, `str2num(str)` returns the empty matrix in `x`.

Text that represents a number can contain one or more numbers separated by spaces, commas, or semicolons, such as `'5'`, `'10,11,12'`, or `'5,10;15,20'`. In addition to numeric values and delimiters, input text can also include a decimal point, leading + or - signs, the letter `e` or `d` preceding a power of 10 scale factor, the letter `i` or `j` indicating a complex or imaginary number, or `true` or `false` indicating logical values.

The following table shows several examples of valid inputs to `str2num`:

String Input	Numeric Output	Output Class
`'500'`	500	`double`
`'500 250 125 67'`	500 250 125 67	1-by-4 row vector of `double`
`'500; 250; 125; 62.5'`	500.0000 250.0000 125.0000 62.5000	4-by-1 column vector of `double`

String Input	Numeric Output	Output Class
`'1 23 6 21; 53:56'`	1 23 6 21 53 54 55 56	2-by-4 matrix of `double`
`'12e-3 5.9e-3'`	0.0120 0.0059	1-by-2 row vector of `double`
`'uint16(500)'`	500	16–bit unsigned `integer`
`'false true'`	0 1	1-by-2 row vector of `logical`

Note: `str2num` does not operate on string arrays or cell arrays. To convert a string array or a cell array of character vectors to numeric values, use `str2double`.

If the input text does not represent a valid number or matrix, `str2num(str)` returns the empty matrix in `x`.

`[x, status] = str2num('str')` returns the status of the conversion in logical `status`, where `status` equals logical `1` (`true`) if the conversion succeeds, and logical `0` (`false`) otherwise.

Space characters can be significant. For instance, `str2num('1+2i')` and `str2num('1 + 2i')` produce `x = 1+2i`, while `str2num('1 +2i')` produces `x = [1 2i]`. You can avoid these problems by using the `str2double` function.

Examples

Input a character vector that represent a single number. The output is a scalar double:

```
A = str2num('500')

A =

   500

class(A)

ans =

double
```

Repeat this operation, but this time using an unsigned 16–bit integer:

```
A = str2num('uint16(500)')

A =

    500

class(A)

ans =

uint16
```

Try three different ways of specifying a row vector. Each returns the same answer:

```
str2num('2 4 6 8')              % Separate with spaces.

ans =

     2     4     6     8

str2num('2,4,6,8')              % Separate with commas.

ans =

     2     4     6     8

str2num('[2 4 6 8]')            % Enclose in brackets.

ans =

     2     4     6     8
```

Note that the first two of these commands do not need the MATLAB square bracket operator to create a matrix. The `str2num` function inserts the brackets for you if they are needed.

Use a column vector this time:

```
str2num('2; 4; 6; 8')
ans =
     2
     4
     6
     8
```

And now a 2-by-2 matrix:

```
str2num('2 4; 6 8')
ans =
     2     4
     6     8
```

See Also

num2str | str2double | hex2num | sscanf | sparse | char | cast

Introduced before R2006a

strcat

Concatenate strings horizontally

Syntax

```
s = strcat(s1,...,sN)
```

Description

`s = strcat(s1,...,sN)` horizontally concatenates `s1,...,sN`. Each input argument can be a character array, a cell array of character vectors, or a string array.

- If any input is a string array, then the result is a string array.
- If any input is a cell array, and none are string arrays, then the result is a cell array of character vectors.
- If all inputs are character arrays, then the result is a character array.

For character array inputs, `strcat` removes trailing ASCII white-space characters: space, tab, vertical tab, newline, carriage return, and form feed. For cell and string array inputs, `strcat` does not remove trailing white space.

Examples

Concatenate Two Character Vectors

```
s1 = 'Good';
s2 = 'morning';
s = strcat(s1,s2)
```

```
s =
'Goodmorning'
```

Concatenate Two Cell Arrays

```
s1 = {'abcde','fghi'};
```

```
s2 = {'jkl','mn'};
s = strcat(s1,s2)
```

```
s = 1×2 cell array
    'abcdejkl'    'fghimn'
```

Concatenate Two Cell Arrays with Scalar Cell Array

```
firstnames = {'Abraham'; 'George'};
lastnames = {'Lincoln'; 'Washington'};
names = strcat(lastnames, {', '}, firstnames)
```

```
names = 2×1 cell array
    'Lincoln, Abraham'
    'Washington, George'
```

Concatenate Two String Arrays

Starting in R2017a, you can create string arrays using double quotes instead of the `string` function. Concatenate them with the `strcat` function.

```
str1 = ["John ","Mary "];
str2 = ["Smith","Jones"];
str = strcat(str1,str2)
```

```
str = 1×2 string array
    "John Smith"    "Mary Jones"
```

Concatenate a character vector onto each element of the string array.

```
str = strcat(str,', M.D.')
```

```
str = 1×2 string array
    "John Smith, M.D."    "Mary Jones, M.D."
```

Text processing functions (such as `strfind` and `regexp`) accept string arrays as inputs, but other functions (for example, `addpath`) do not.

Input Arguments

s1,...,sN — Input text

character arrays | cell array of character vectors | string arrays

Input text, specified as character arrays, cell arrays of character vectors, or string arrays. When combining string or cell arrays with character arrays, the string or cell arrays must be either scalars or column vectors with the same number of rows as the character arrays.

Data Types: `char` | `cell` | `string`

Tips

- Character arrays also can be concatenated using left and right square brackets.

```
s1 = 'Good ';
s2 = 'Morning';
s = [s1 s2]
```

```
s =

Good Morning
```

See Also

See Also

`cat` | `cellstr` | `horzcat` | `join` | `strjoin` | `vertcat`

Introduced before R2006a

strcmp

Compare strings

Syntax

```
tf = strcmp(s1,s2)
```

Description

`tf = strcmp(s1,s2)` compares `s1` and `s2` and returns `1` (`true`) if the two are identical and `0` (`false`) otherwise. Text is considered identical if the size and content of each are the same. The return result `tf` is of data type `logical`.

The input arguments can be any combination of string arrays, character vectors, and cell arrays of character vectors.

Examples

Compare Two Character Vectors

Compare two different character vectors.

```
s1 = 'Yes';
s2 = 'No';
tf = strcmp(s1,s2)
```

```
tf = logical
   0
```

`strcmp` returns `0` because `s1` and `s2` are not equal.

Compare two equal character vectors.

```
s1 = 'Yes';
s2 = 'Yes';
tf = strcmp(s1,s2)
```

```
tf = logical
```

```
   1
```

`strcmp` returns `1` because `s1` and `s2` are equal.

Find Text in Cell Array

Find the word `'upon'` in a cell array of character vectors.

```
s1 = 'upon';
s2 = {'Once','upon';
      'a','time'};
tf = strcmp(s1,s2)
```

```
tf = 2×2 logical array
   0   1
   0   0
```

There is only one occurrence of `s1` in array `s2`, and it occurs at element `s2(1,2)`.

Compare Two Cell Arrays of Character Vectors

Compare each element in two cell arrays of character vectors.

```
s1 = {'Time','flies','when';
      'you''re','having','fun.'};
s2 = {'Time','drags','when';
      'you''re','anxiously','waiting.'};
tf = strcmp(s1,s2)
```

```
tf = 2×3 logical array
   1   0   1
   1   0   0
```

There are three instances of equal elements in `s1` and `s2`. These are `'Time'` at indices `(1,1)`, `'when'` at indices |(1,3)|, and `'you''re'` at indices `(2,1)`.

Compare String Arrays

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Compare string arrays using `strcmp`.

```
s1 = ["A","bc";
      "def","G"];
s2 = ["B","c";
      "def","G"];

tf = strcmp(s1,s2)
```

```
tf = 2×2 logical array
   0   0
   1   1
```

You can compare and sort string arrays with relational operators, just as you can with numeric arrays.

Use `==` to determine which elements of two string arrays are equal.

```
s1 == s2
```

```
ans = 2×2 logical array
   0   0
   1   1
```

Use `<` to determine which elements of `s1` are less than the corresponding elements of `s2` according to ASCII dictionary order.

```
s1 < s2
```

```
ans = 2×2 logical array
   1   1
   0   0
```

Text processing functions (such as `strfind` and `regexp`) accept string arrays as inputs, but other functions (for example, `addpath`) do not.

- "Compare Text"

Input Arguments

`s1,s2` — Input text

character vector | character array | cell array of character vectors | string array

Input text, with each input specified as a character vector, a character array, a cell array of character vectors, or a string array. The order of the inputs does not affect the comparison results.

- If both `s1` and `s2` are string arrays or cell arrays of character vectors, then `s1` and `s2` must be the same size, unless one of them is scalar.
- If both `s1` and `s2` are character arrays with multiple rows, then `s1` and `s2` can have different numbers of rows.
- When comparing a nonscalar cell array of character vectors or a string array to a multirow character array, the cell array or string array must be a column vector with the same number of rows as the character array.

Data Types: `char` | `cell` | `string`

Output Arguments

`tf` — True or false result

`1` | `0` | logical array

True or false result, returned as a `1` or `0` of data type `logical`.

- If each input is either a string scalar, scalar cell, or a character vector, then `tf` is a scalar.
- If at least one input is either a string array or a cell array of character vectors, then `tf` is an array the same size as the input array.
- If one input is a character array with multiple rows, and the other input is either a scalar cell or a string scalar, then `tf` is an `n`-by-`1` array, where `n` is the number of rows in the character array.
- If both inputs are character arrays, `tf` is a scalar.

Tips

- The `strcmp` function is intended for comparison of text. If used on unsupported data types, `strcmp` always returns `0`.
- For case-insensitive text comparison, use `strcmpi` instead of `strcmp`.
- Although `strcmp` shares a name with a C function, it does not follow the C language convention of returning `0` when the text inputs match.

- With string arrays, you can use relational operators (==, ~=, <, >, <=, >=) instead of `strcmp`. You can compare and sort string arrays just as you can with numeric arrays.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Enumeration inputs are not supported.
- When one input is a cell array and the other input is a character array, the character array must be a compile-time row vector.
- When both inputs are empty character arrays that have different sizes, the generated code returns `true`.

See Also

See Also

`eq` | `ne` | `regexp` | `regexpi` | `sort` | `strcmpi` | `strfind` | `strncmp` | `strncmpi`

Topics

“Compare Text”

Introduced before R2006a

strcmpi

Compare strings (case insensitive)

Syntax

```
tf = strcmpi(s1,s2)
```

Description

`tf = strcmpi(s1,s2)` compares `s1` and `s2`, ignoring any differences in letter case. The function returns `1` (`true`) if the two are identical and `0` (`false`) otherwise. Text is considered identical if the size and content of each are the same, aside from case. The return result `tf` is of data type `logical`.

The input arguments can be any combination of string arrays, character vectors, and cell arrays of character vectors.

Examples

Compare Two Character Vectors While Ignoring Case

Compare two different character vectors, ignoring any differences in letter case.

```
s1 = 'Yes';
s2 = 'No';
tf = strcmpi(s1,s2)
```

```
tf = logical
   0
```

`strcmpi` returns `0` because `s1` and `s2` are not equal, even when ignoring case.

Compare two equal character vectors.

```
s1 = 'Yes';
```

```
s2 = 'yes';
tf = strcmpi(s1,s2)
```

```
tf = logical
   1
```

`strcmpi` returns `1` because `s1` and `s2` are equal when ignoring case.

Find Case-Insensitive Match in Cell Array

Find text that matches the word `'once'` in a cell array of character vectors. Ignore case.

```
s1 = 'once';
s2 = {'Once','upon';
      'a','time'};
tf = strcmpi(s1,s2)
```

```
tf = 2×2 logical array
   1   0
   0   0
```

When you ignore case, there is one occurrence of `s1` in the array `s2`, and it occurs at the element `s2(1,1)`.

Compare Cell Arrays While Ignoring Case

Create two cell arrays of character vectors. To compare them while ignoring case, use the `strcmpi` function.

```
s1 = {'Tinker', 'Tailor';
      '  Soldier', 'Spy'};
s2 = {'Tinker', 'Baker';
      'Soldier', 'SPY'};

tf = strcmpi(s1,s2)
```

```
tf = 2×2 logical array
   1   0
   0   1
```

`tf(1,1)` is `1` because `'Tinker'` is in the first cell of both arrays. `tf(2,2)` is `1` because `'Spy'` and `'SPY'` differ only in case. `tf(2,1)` is `0` because `' Soldier'` in `s1(2,1)` has whitespace characters, and `'Soldier'` in `s2(2,1)` does not.

Compare String Arrays While Ignoring Case

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Compare two string arrays, ignoring case, using `strcmpi`.

```
s1 = ["A","bc";
      "def","G"];
s2 = ["B","c";
      "DEF","G"];

tf = strcmpi(s1,s2)
```

```
tf = 2×2 logical array
   0   0
   1   1
```

- "Compare Text"

Input Arguments

`s1,s2` — Input text

character vector | character array | cell array of character vectors | string array

Input text, with each input specified as a character vector, a character array, a cell array of character vectors, or a string array. The order of the inputs does not affect the comparison results.

- If both `s1` and `s2` are string arrays or cell arrays of character vectors, then `s1` and `s2` must be the same size, unless one of them is scalar.
- If both `s1` and `s2` are character arrays with multiple rows, then `s1` and `s2` can have different numbers of rows.
- When comparing a nonscalar cell array of character vectors or a string array to a multirow character array, the cell array or string array must be a column vector with the same number of rows as the character array.

Data Types: `char` | `cell` | `string`

Output Arguments

`tf` — True or false result
`1` | `0` | logical array

True or false result, returned as a `1` or `0` of data type `logical`.

- If each input is either a string scalar or a character vector, then `tf` is a scalar.
- If at least one input is either a string array or a cell array of character vectors, then `tf` is an array the same size as the input array.
- If one input is a character array with multiple rows, and the other input is either a scalar cell or a string scalar, then `tf` is an `n`-by-`1` array, where `n` is the number of rows in the character array.
- If both inputs are character arrays, `tf` is a scalar.

Tips

- The `strcmpi` function is intended for comparison of text. If used on an unsupported data type, `strcmpi` always returns `0`.
- For case-sensitive text comparison, use `strcmp` instead of `strcmpi`.
- Although `strcmpi` shares a name with a C function, it does not follow the C language convention of returning `0` when the text inputs match.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Enumeration inputs are not supported.
- Input values from the `char` class must be in the range 0-127.
- When one input is a cell array and the other input is a character array, the character array must be a compile-time row vector.
- When both inputs are empty character arrays that have different sizes, the generated code returns `true`.

See Also

See Also

`eq` | `ne` | `regexp` | `regexpi` | `sort` | `strcmp` | `strfind` | `strncmp` | `strncmpi`

Topics

"Compare Text"

Introduced before R2006a

stream2

Compute 2-D streamline data

Syntax

```
XY = stream2(x,y,u,v,startx,starty)
XY = stream2(u,v,startx,starty)
XY = stream2(...,options)
```

Description

`XY = stream2(x,y,u,v,startx,starty)` computes streamlines from vector data `u` and `v`.

The arrays `x` and `y`, which define the coordinates for `u` and `v`, must be monotonic, but do not need to be uniformly spaced. `x` and `y` must have the same number of elements, as if produced by `meshgrid`.

`startx` and `starty` define the starting positions of the streamlines. The section "Specifying Starting Points for Stream Plots" provides more information on defining starting points.

The returned value `XY` contains a cell array of vertex arrays.

`XY = stream2(u,v,startx,starty)` assumes the arrays `x` and `y` are defined as `[x,y] = meshgrid(1:n,1:m)` where `[m,n] = size(u)`.

`XY = stream2(...,options)` specifies the options used when creating the streamlines. Define `options` as a one- or two-element vector containing the step size or the step size and the maximum number of vertices in a streamline:

```
[stepsize]
```

or

```
[stepsize, max_number_vertices]
```

If you do not specify a value, MATLAB software uses the default:

- Step size = 0.1 (one tenth of a cell)

- Maximum number of vertices = 10000

Use the `streamline` command to plot the data returned by `stream2`.

Examples

Plot 2-D Streamlines

Plot 2-D streamlines from data representing air currents over regions of North America.

```
load wind
[sx,sy] = meshgrid(80,20:10:50);
streamline(stream2(x(:,:,5),y(:,:,5),u(:,:,5),v(:,:,5),sx,sy));
```

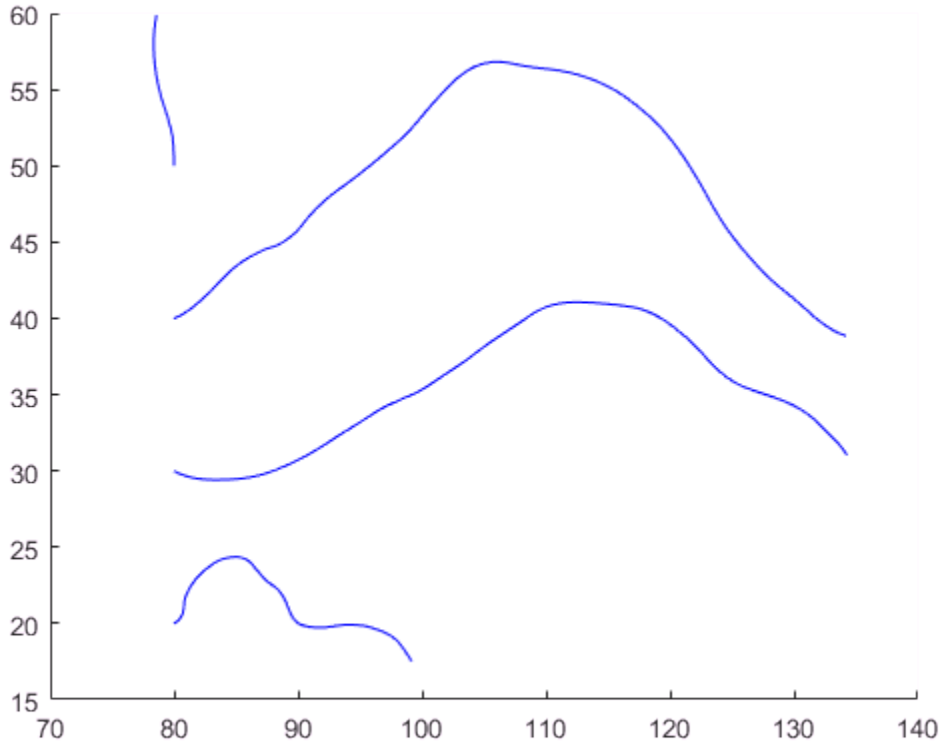

See Also

`coneplot` | `stream3` | `streamline`

Topics

Specifying Starting Points for Stream Plots

Introduced before R2006a

stream3

Compute 3-D streamline data

Syntax

```
XYZ = stream3(X,Y,Z,U,V,W,startx,starty,startz)
XYZ = stream3(U,V,W,startx,starty,startz)
XYZ = stream3(...,options)
```

Description

`XYZ = stream3(X,Y,Z,U,V,W,startx,starty,startz)` computes streamlines from vector data `U`, `V`, `W`.

The arrays `X`, `Y`, and `Z`, which define the coordinates for `U`, `V`, and `W`, must be monotonic, but do not need to be uniformly spaced. `X`, `Y`, and `Z` must have the same number of elements, as if produced by `meshgrid`.

`startx`, `starty`, and `startz` define the starting positions of the streamlines. The section "Specifying Starting Points for Stream Plots" provides more information on defining starting points.

The returned value `XYZ` contains a cell array of vertex arrays.

`XYZ = stream3(U,V,W,startx,starty,startz)` assumes the arrays `X`, `Y`, and `Z` are defined as `[X,Y,Z] = meshgrid(1:N,1:M,1:P)` where `[M,N,P] = size(U)`.

`XYZ = stream3(...,options)` specifies the options used when creating the streamlines. Define `options` as a one- or two-element vector containing the step size or the step size and the maximum number of vertices in a streamline:

```
[stepsize]
```

or

```
[stepsize, max_number_vertices]
```

If you do not specify values, MATLAB software uses the default:

- Step size = 0.1 (one tenth of a cell)
- Maximum number of vertices = 10000

Use the `streamline` command to plot the data returned by `stream3`.

Examples

Plot 3-D Streamlines

Plot 3-D streamlines from data representing air currents over regions of North America.

```
load wind
[sx,sy,sz] = meshgrid(80,20:10:50,0:5:15);
streamline(stream3(x,y,z,u,v,w,sx,sy,sz))
view(3);
```

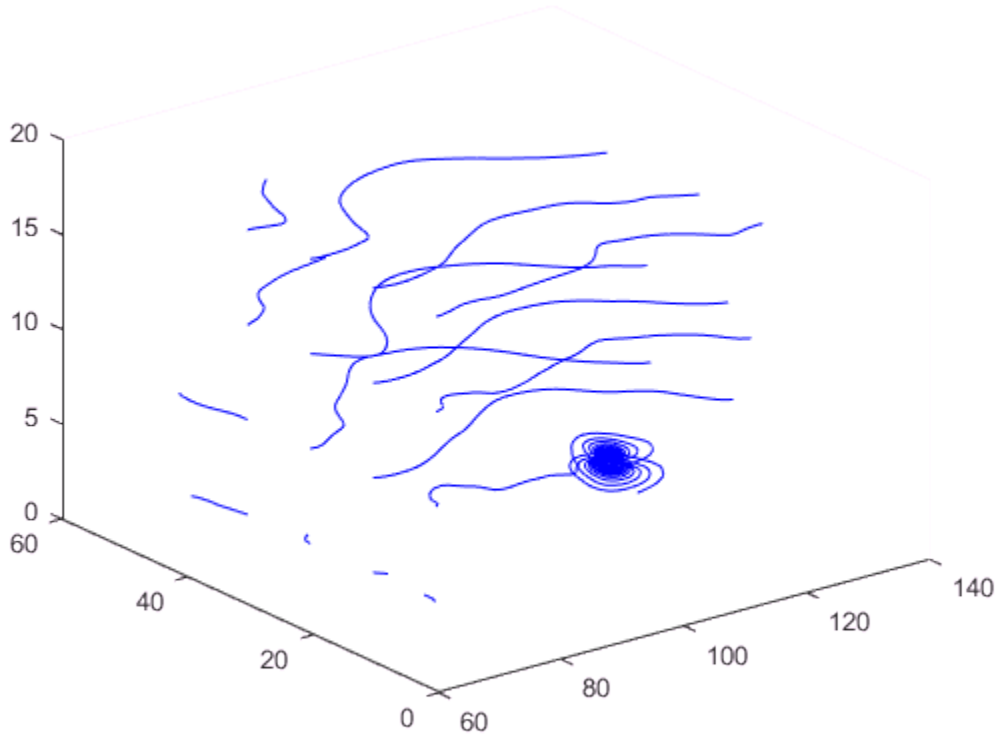

See Also

`coneplot` | `stream2` | `streamline`

Topics

Specifying Starting Points for Stream Plots

Introduced before R2006a

streamline

Plot streamlines from 2-D or 3-D vector data



Syntax

```
streamline(X,Y,Z,U,V,W,startx,starty,startz)
streamline(U,V,W,startx,starty,startz)
streamline(XYZ)
streamline(X,Y,U,V,startx,starty)
streamline(U,V,startx,starty)
streamline(XY)
streamline(...,options)
streamline(axes_handle,...)
h = streamline(...)
```

Description

`streamline(X,Y,Z,U,V,W,startx,starty,startz)` draws streamlines from 3-D vector data `U`, `V`, `W`.

The arrays `X`, `Y`, and `Z`, which define the coordinates for `U`, `V`, and `W`, must be monotonic, but do not need to be uniformly spaced. `X`, `Y`, and `Z` must have the same number of elements, as if produced by `meshgrid`.

`startx`, `starty`, `startz` define the starting positions of the streamlines. The section Specifying Starting Points for Stream Plots provides more information on defining starting points.

`streamline(U,V,W,startx,starty,startz)` assumes the arrays `X`, `Y`, and `Z` are defined as `[X,Y,Z] = meshgrid(1:N,1:M,1:P)`, where `[M,N,P] = size(U)`.

`streamline(XYZ)` assumes `XYZ` is a precomputed cell array of vertex arrays (as produced by `stream3`).

`streamline(X,Y,U,V,startx,starty)` draws streamlines from 2-D vector data `U`, `V`.

The arrays `X` and `Y`, which define the coordinates for `U` and `V`, must be monotonic, but do not need to be uniformly spaced. `X` and `Y` must have the same number of elements, as if produced by `meshgrid`.

`startx` and `starty` define the starting positions of the streamlines. The output argument `h` contains a vector of line handles, one handle for each streamline.

`streamline(U,V,startx,starty)` assumes the arrays `X` and `Y` are defined as `[X,Y] = meshgrid(1:N,1:M)`, where `[M,N] = size(U)`.

`streamline(XY)` assumes `XY` is a precomputed cell array of vertex arrays (as produced by `stream2`).

`streamline(...,options)` specifies the options used when creating the streamlines. Define `options` as a one- or two-element vector containing the step size or the step size and the maximum number of vertices in a streamline:

```
[stepsize]
```

or

```
[stepsize, max_number_vertices]
```

If you do not specify values, MATLAB uses the default:

- Step size = 0.1 (one tenth of a cell)
- Maximum number of vertices = 1000

`streamline(axes_handle,...)` plots into the axes object with the handle `axes_handle` instead of the into current axes object (`gca`).

`h = streamline(...)` returns a vector of line handles, one handle for each streamline.

Examples

Draw Streamlines

Define arrays `x`, `y`, `u`, and `v`.

```
[x,y] = meshgrid(0:0.1:1,0:0.1:1);
u = x;
v = -y;
```

Create a quiver plot of the data. Plot streamlines that start at different points along the line $y = 1$.

```
figure
quiver(x,y,u,v)

startx = 0.1:0.1:1;
starty = ones(size(startx));
streamline(x,y,u,v,startx,starty)
```

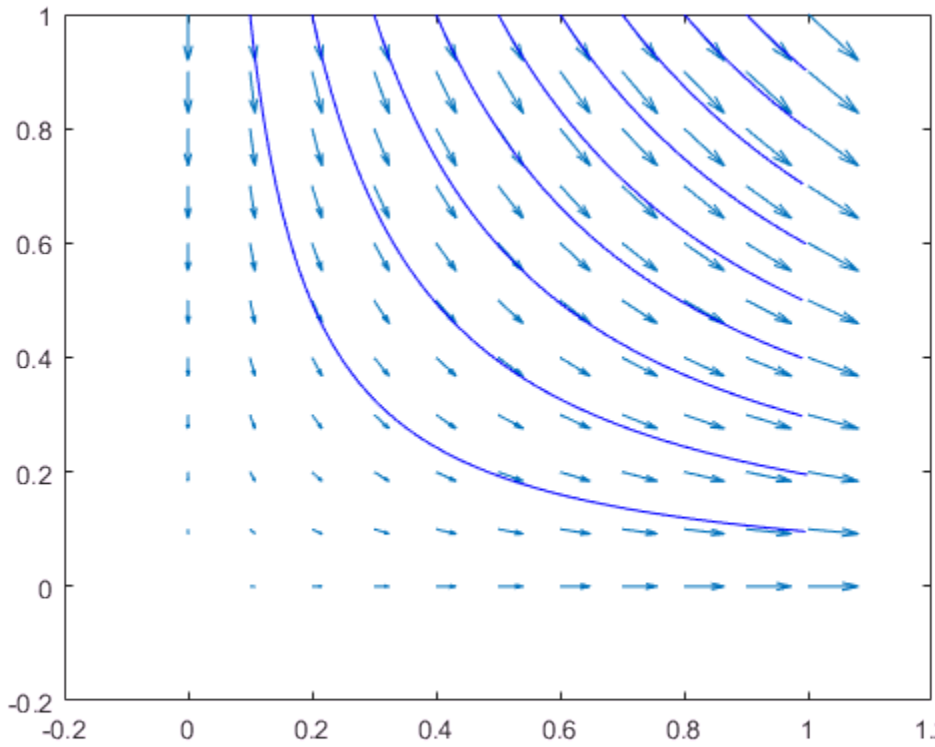

See Also

`coneplot` | `stream2` | `stream3` | `streamparticles` | `meshgrid`

Topics

Specifying Starting Points for Stream Plots
Stream Line Plots of Vector Data

Introduced before R2006a

streamparticles

Plot stream particles

Syntax

```
streamparticles(vertices)
streamparticles(vertices,n)
streamparticles(...,'PropertyName',PropertyValue,...)
streamparticles(ax,...)
streamparticles(line_handle,...)
h = streamparticles(...)
```

Description

`streamparticles(vertices)` draws stream particles of a vector field. Stream particles are usually represented by markers and can show the position and velocity of a streamline. `vertices` is a cell array of 2-D or 3-D vertices (as if produced by `stream2` or `stream3`).

`streamparticles(vertices,n)` uses `n` to determine how many stream particles to draw. The `ParticleAlignment` property controls how `n` is interpreted.

- If `ParticleAlignment` is set to `off` (the default) and `n` is greater than `1`, approximately `n` particles are drawn evenly spaced over the streamline vertices.

  If `n` is less than or equal to `1`, `n` is interpreted as a fraction of the original stream vertices; for example, if `n` is `0.2`, approximately 20% of the vertices are used.

  `n` determines the upper bound for the number of particles drawn. The actual number of particles can deviate from `n` by as much as a factor of 2.
- If `ParticleAlignment` is `on`, `n` determines the number of particles on the streamline having the most vertices and sets the spacing on the other streamlines to this value. The default value is `n = 1`.

`streamparticles(...,'PropertyName',PropertyValue,...)` controls the stream particles using named properties and specified values. Any unspecified properties have default values. MATLAB ignores the case of property names.

`streamparticles(ax,...)` creates the stream particles in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

Stream Particle Properties

`Animate` — Stream particle motion [nonnegative integer]

The number of times to animate the stream particles. The default is `0`, which does not animate. `Inf` animates until you enter **Ctrl+C**.

`FrameRate` — Animation frames per second [nonnegative integer]

This property specifies the number of frames per second for the animation. `Inf`, the default, draws the animation as fast as possible. Note that the speed of the animation might be limited by the speed of the computer. In such cases, the value of `FrameRate` cannot necessarily be achieved.

`ParticleAlignment` — Align particles with streamlines [`on` | `{off}`]

Set this property to `on` to draw particles at the beginning of each streamline. This property controls how `streamparticles` interprets the argument `n` (number of stream particles).

Stream particles are primitive line objects. In addition to stream particle properties, you can specify any line property, such as `Marker`. `streamparticles` sets the following line properties when called.

Line Property	Value Set by streamparticles
`LineStyle`	`'none'`
`Marker`	`'o'`
`MarkerEdgeColor`	`'none'`
`MarkerFaceColor`	`'red'`

You can override any of these properties by specifying a property name and value as arguments to `streamparticles`. For example, this statement uses RGB values to set the `MarkerFaceColor` to medium gray:

```
streamparticles(vertices,'MarkerFaceColor',[.5 .5 .5])
```

`streamparticles(line_handle,...)` uses the line object identified by `line_handle` to draw the stream particles.

`h = streamparticles(...)` returns a vector of handles to the primitive line objects it creates. For a list of properties, see Primitive Line Properties.

Examples

Animate Flow Without Displaying Streamlines

This example uses streamlines in the `z = 5` plane to animate the flow along these lines with stream particles.

```
%

load wind
figure
daspect([1,1,1]);
view(2)
[verts,averts] = streamslice(x,y,z,u,v,w,[],[],[5]);
sl = streamline([verts averts]);
axis tight manual off;
ax = gca;
ax.Position = [0,0,1,1];
set(sl,'Visible','off')
iverts = interpstreamspeed(x,y,z,u,v,w,verts,.05);
zlim([4.9,5.1]);
streamparticles(iverts, 200, ...
    'Animate',15,'FrameRate',40, ...
    'MarkerSize',10,'MarkerFaceColor',[0 .5 0])
```

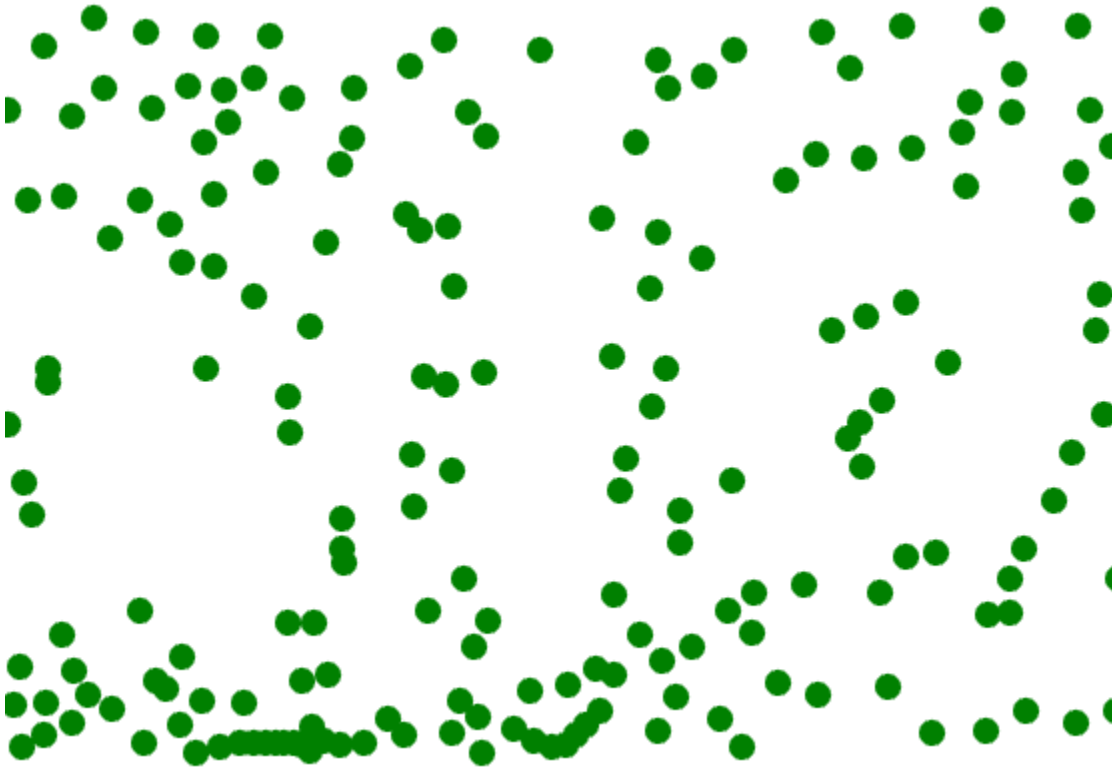

See Also

`interpstreamspeed` | `stream3` | `streamline` | `stream2`

Topics

Creating Stream Particle Animations
Specifying Starting Points for Stream Plots

Introduced before R2006a

streamribbon

3-D stream ribbon plot from vector volume data



Syntax

```
streamribbon(X,Y,Z,U,V,W,startx,starty,startz)
streamribbon(U,V,W,startx,starty,startz)
streamribbon(vertices,X,Y,Z,cav,speed)
streamribbon(vertices,cav,speed)
streamribbon(vertices,twistangle)
streamribbon(...,width)
streamribbon(axes_handle,...)
h = streamribbon(...)
```

Description

`streamribbon(X,Y,Z,U,V,W,startx,starty,startz)` draws stream ribbons from vector volume data `U`, `V`, `W`.

The arrays `X`, `Y`, and `Z`, which define the coordinates for `U`, `V`, and `W`, must be monotonic, but do not need to be uniformly spaced. `X`, `Y`, and `Z` must have the same number of elements, as if produced by `meshgrid`.

`startx`, `starty`, and `startz` define the starting positions of the stream ribbons at the center of the ribbons. The section Specifying Starting Points for Stream Plots provides more information on defining starting points.

The twist of the ribbons is proportional to the curl of the vector field. The width of the ribbons is calculated automatically.

`streamribbon(U,V,W,startx,starty,startz)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X,Y,Z] = meshgrid(1:n,1:m,1:p)
```

where `[m,n,p] = size(U)`.

`streamribbon(vertices,X,Y,Z,cav,speed)` assumes precomputed streamline vertices, curl angular velocity, and flow speed. `vertices` is a cell array of streamline vertices (as produced by `stream3`). `X`, `Y`, `Z`, `cav`, and `speed` are 3-D arrays.

`streamribbon(vertices,cav,speed)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X,Y,Z] = meshgrid(1:n,1:m,1:p)
```

where `[m,n,p] = size(cav)`.

`streamribbon(vertices,twistangle)` uses the cell array of vectors `twistangle` for the twist of the ribbons (in radians). The size of each corresponding element of `vertices` and `twistangle` must be equal.

`streamribbon(...,width)` sets the width of the ribbons to `width`.

`streamribbon(axes_handle,...)` plots into the axes object with the handle `axes_handle` instead of into the current axes object (`gca`).

`h = streamribbon(...)` returns a vector of handles (one per start point) to `surface` objects.

Examples

Use Stream Ribbons to Indicate Flow

Use stream ribbons to indicate the flow in a data set.

```
load wind
[sx,sy,sz] = meshgrid(80,20:10:50,0:5:15);
streamribbon(x,y,z,u,v,w,sx,sy,sz);
axis tight
shading interp
view(3);
camlight
lighting gouraud
```

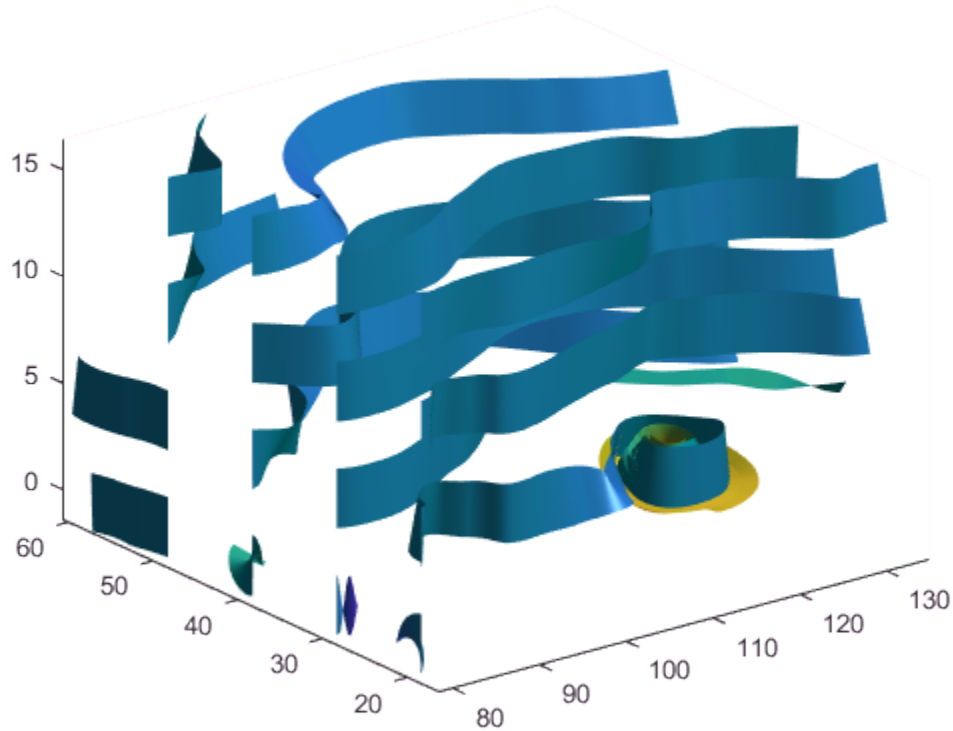

Indicate Flow Using Precalculated Data

Use precalculated vertex data, curl average velocity, and speed to indicate flow.

```
load wind
[sx,sy,sz] = meshgrid(80,20:10:50,0:5:15);
verts = stream3(x,y,z,u,v,w,sx,sy,sz);
cav = curl(x,y,z,u,v,w);
spd = sqrt(u.^2 + v.^2 + w.^2).*.1;
streamribbon(verts,x,y,z,cav,spd);
axis tight
shading interp
view(3);
```

```
camlight;
lighting gouraud
```

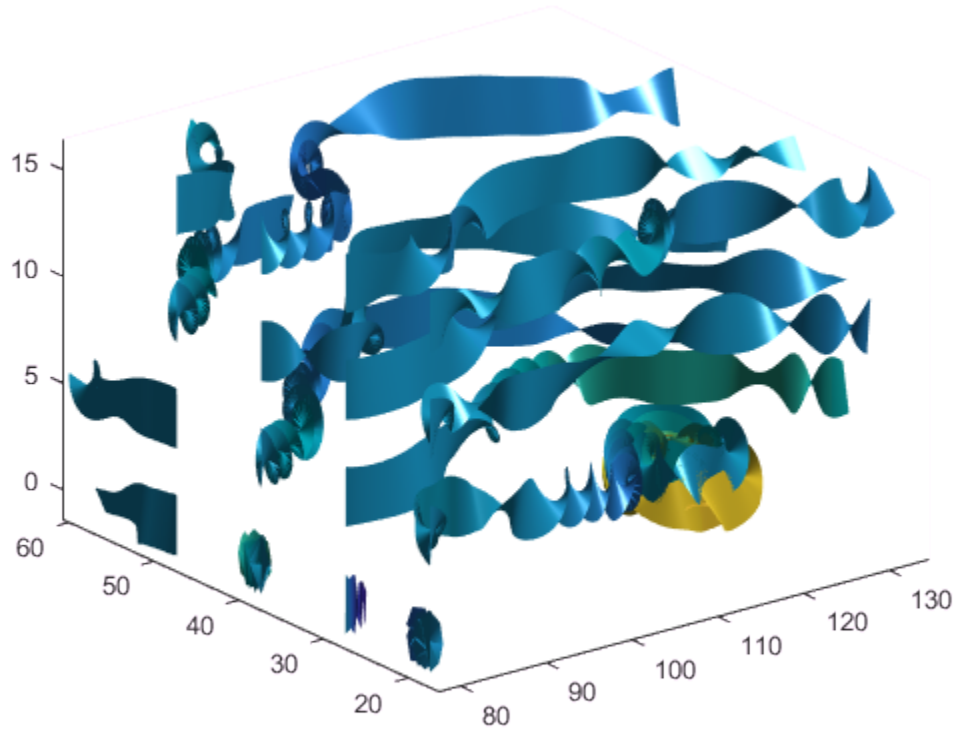

Using precalculated data enables you to use values other than those calculated from the single data source. In this case, the speed is reduced by a factor of 10 compared to the previous example.

Stream Ribbon With Twist Angle

Specify a twist angle for the stream ribbon

```
t = 0:.15:15;
verts = {[cos(t)' sin(t)' (t/3)']};
```

```
twistangle = {cos(t)'};
streamribbon(verts,twistangle);
axis tight
shading interp
view(3)
camlight
lighting gouraud
```

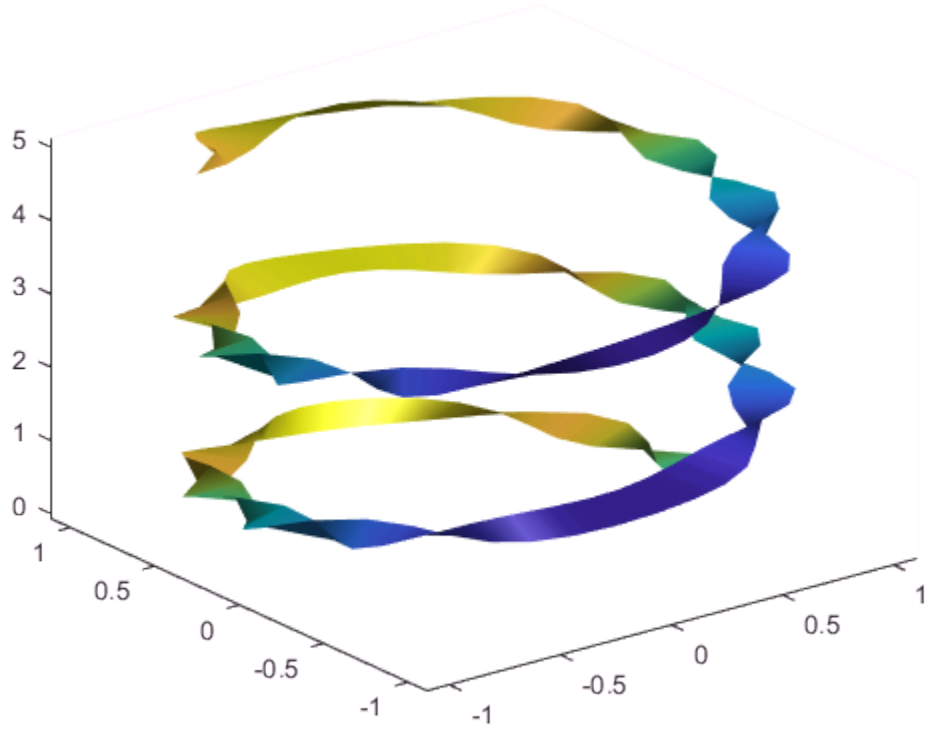

Combination of Cone and Stream Ribbon Plots

Create 3-D arrays and a cone plot.

```
xmin = -7; xmax = 7;
ymin = -7; ymax = 7;
```

```
zmin = -7; zmax = 7;
x = linspace(xmin,xmax,30);
y = linspace(ymin,ymax,20);
z = linspace(zmin,zmax,20);
[x,y,z] = meshgrid(x,y,z);
u = y;
v = -x;
w = 0*x+1;
[cx,cy,cz] = meshgrid(linspace(xmin,xmax,30),...
   linspace(ymin,ymax,30),[-3 4]);
h = coneplot(x,y,z,u,v,w,cx,cy,cz,'quiver');
set(h,'Color','k');
```

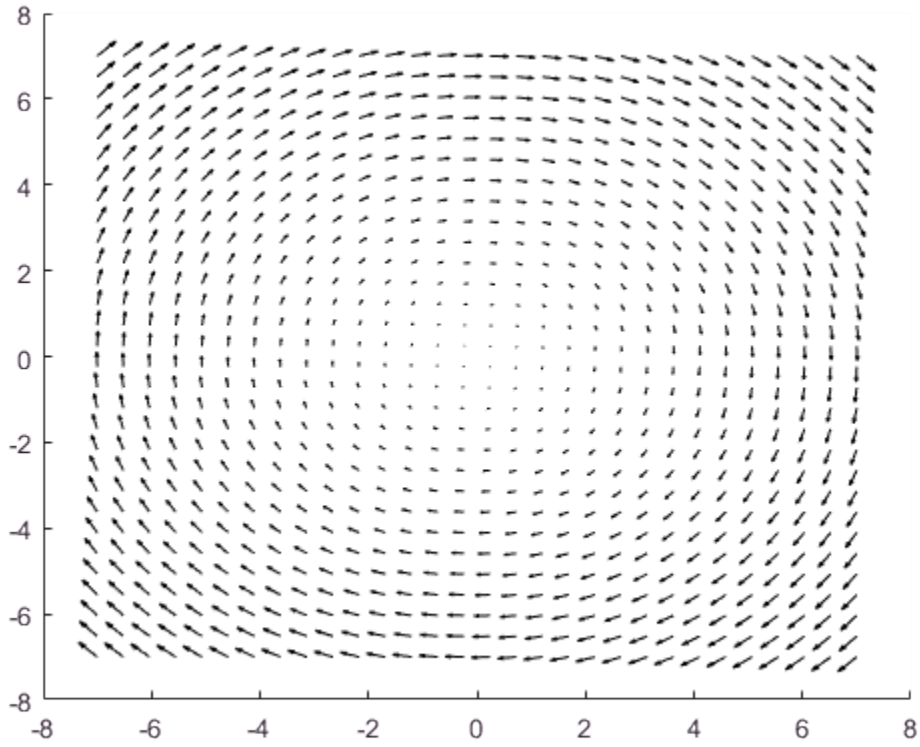

Plot two sets of stream ribbons. Then define the view and lighting.

```
[sx,sy,sz] = meshgrid([-1 0 1],[-1 0 1],-6);
streamribbon(x,y,z,u,v,w,sx,sy,sz);
[sx,sy,sz] = meshgrid([1:6],[0],-6);
streamribbon(x,y,z,u,v,w,sx,sy,sz);
shading interp
view(-30,10)
axis off tight
camproj perspective
camva(66)
camlookat
camdolly(0,0,.5,'fixtarget')
camlight
```

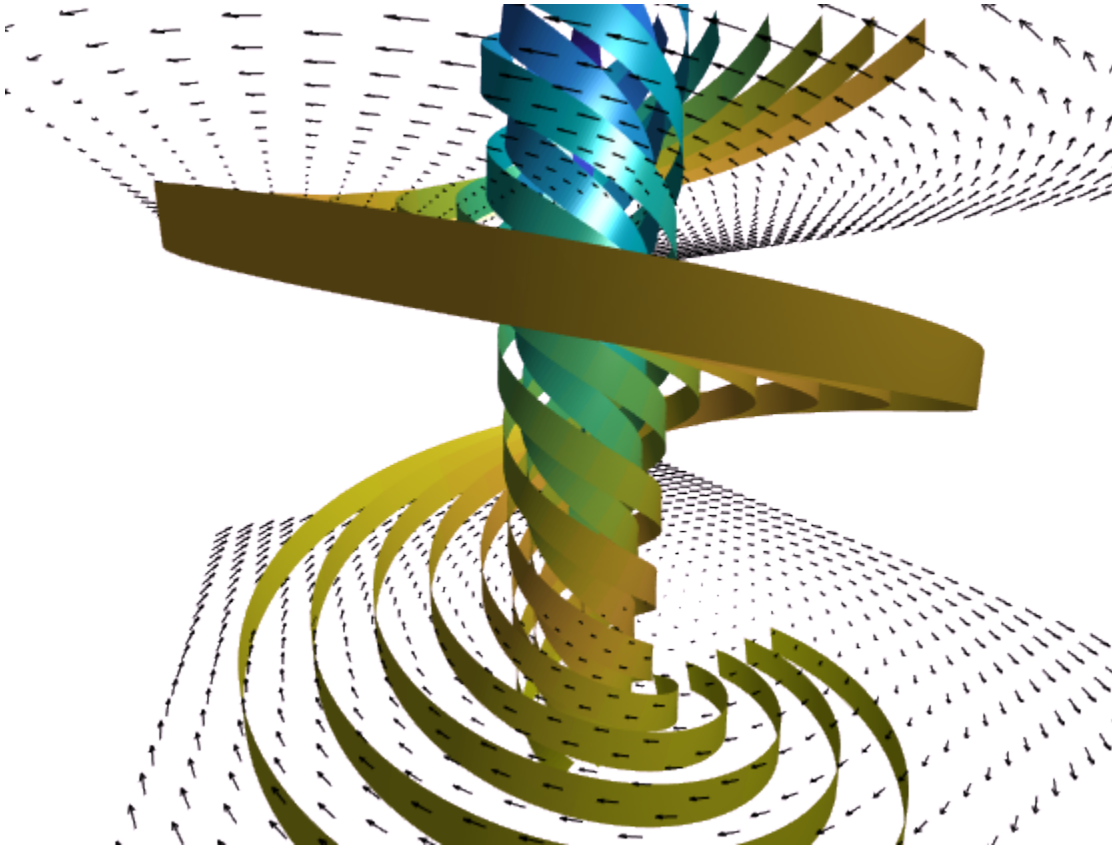

See Also

`curl` | `streamtube` | `streamline` | `stream3` | `meshgrid` | `coneplot`

Topics

"Volume Visualization"
Displaying Curl with Stream Ribbons
Specifying Starting Points for Stream Plots

Introduced before R2006a

streamslice

Plot streamlines in slice planes



Syntax

```
streamslice(X,Y,Z,U,V,W,startx,starty,startz)
streamslice(U,V,W,startx,starty,startz)
streamslice(X,Y,U,V)
streamslice(U,V)
streamslice(...,density)
streamslice(...,'arrowsmode')
streamslice(...,'method')
streamslice(axes_handle,...)
h = streamslice(...)
[vertices arrowvertices] = streamslice(...)
```

Description

`streamslice(X,Y,Z,U,V,W,startx,starty,startz)` draws well-spaced streamlines (with direction arrows) from vector data `U`, `V`, `W` in axis aligned *x*-, *y*-, *z*-planes at the points in the vectors `startx`, `starty`, `startz`. The section Specifying Starting Points for Stream Plots provides more information on defining starting points.

The arrays `X`, `Y`, and `Z`, which define the coordinates for `U`, `V`, and `W`, must be monotonic, but do not need to be uniformly spaced. `X`, `Y`, and `Z` must have the same number of elements, as if produced by `meshgrid`. `U`, `V`, `W` must be m-by-n-by-p volume arrays.

Do not assume that the flow is parallel to the slice plane. For example, in a stream slice at a constant `z`, the `z` component of the vector field `W` is ignored when you are calculating the streamlines for that plane.

Stream slices are useful for determining where to start streamlines, stream tubes, and stream ribbons.

`streamslice(U,V,W,startx,starty,startz)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X,Y,Z] = meshgrid(1:n,1:m,1:p)
```

where `[m,n,p] = size(U)`.

`streamslice(X,Y,U,V)` draws well-spaced streamlines (with direction arrows) from vector volume data `U`, `V`.

The arrays `X` and `Y`, which define the coordinates for `U` and `V`, must be monotonic, but do not need to be uniformly spaced. `X` and `Y` must have the same number of elements, as if produced by `meshgrid`.

`streamslice(U,V)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X,Y,Z] = meshgrid(1:n,1:m,1:p)
```

where `[m,n,p] = size(U)`.

`streamslice(...,density)` modifies the automatic spacing of the streamlines. `density` must be greater than `0`. The default value is `1`; higher values produce more streamlines on each plane. For example, `2` produces approximately twice as many streamlines, while `0.5` produces approximately half as many.

`streamslice(...,'arrowsmode')` determines if direction arrows are present or not. `arrowmode` can be

- `arrows` — Draw direction arrows on the streamlines (default).
- `noarrows` — Do not draw direction arrows.

`streamslice(...,'method')` specifies the interpolation method to use. `method` can be

- `linear` — Linear interpolation (default)
- `cubic` — Cubic interpolation
- `nearest` — Nearest-neighbor interpolation

See `interp3` for more information on interpolation methods.

`streamslice(axes_handle,...)` plots into the axes object with the handle `axes_handle` instead of into the current axes object (`gca`).

`h = streamslice(...)` returns a vector of handles to the line objects created.

`[vertices arrowvertices] = streamslice(...)` returns two cell arrays of vertices for drawing the streamlines and the arrows. You can pass these values to any of the streamline drawing functions (`streamline`, `streamribbon`, `streamtube`).

Examples

Plot Streamlines in Slice Plane

Load the `wind` data set. Draw a stream slice at `z = 5`.

```
load wind

figure
streamslice(x,y,z,u,v,w,[],[],[5])
axis tight
```

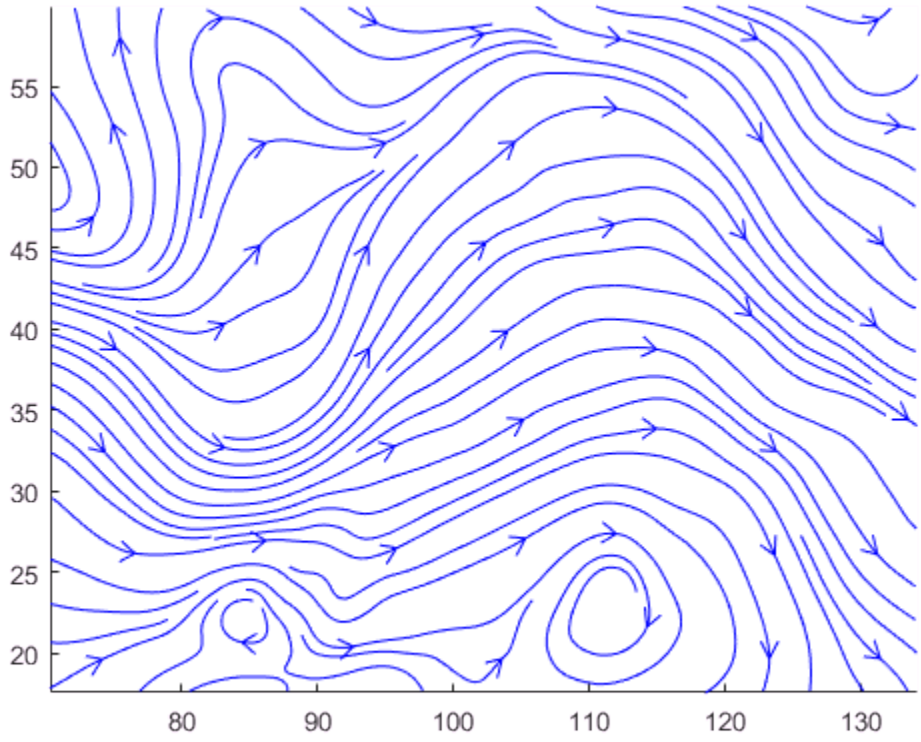

See Also

`contourslice` | `slice` | `streamline` | `volumebounds` | `meshgrid` | `interp3` | `interp2` | `streamribbon` | `streamtube`

Topics

Specifying Starting Points for Stream Plots

Introduced before R2006a

streamtube

Create 3-D stream tube plot

Syntax

```
streamtube(X,Y,Z,U,V,W,startx,starty,startz)
streamtube(U,V,W,startx,starty,startz)
streamtube(vertices,X,Y,Z,divergence)
streamtube(vertices,divergence)
streamtube(vertices,width)
streamtube(vertices)
streamtube(...,[scale n])
streamtube(axes_handle,...)
h = streamtube(...z)
```

Description

`streamtube(X,Y,Z,U,V,W,startx,starty,startz)` draws stream tubes from vector volume data `U`, `V`, `W`.

The arrays `X`, `Y`, and `Z`, which define the coordinates for `U`, `V`, and `W`, must be monotonic, but do not need to be uniformly spaced. `X`, `Y`, and `Z` must have the same number of elements, as if produced by `meshgrid`.

`startx`, `starty`, and `startz` define the starting positions of the streamlines at the center of the tubes. The section Specifying Starting Points for Stream Plots provides more information on defining starting points.

The width of the tubes is proportional to the normalized divergence of the vector field.

`streamtube(U,V,W,startx,starty,startz)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X,Y,Z] = meshgrid(1:n,1:m,1:p)
```

where `[m,n,p] = size(U)`.

`streamtube(vertices,X,Y,Z,divergence)` assumes precomputed streamline vertices and divergence. `vertices` is a cell array of streamline vertices (as produced by `stream3`). `X`, `Y`, `Z`, and `divergence` are 3-D arrays.

`streamtube(vertices,divergence)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X,Y,Z] = meshgrid(1:n,1:m,1:p)
```

where `[m,n,p] = size(divergence)`.

`streamtube(vertices,width)` specifies the width of the tubes in the cell array of vectors, `width`. The size of each corresponding element of `vertices` and `width` must be equal. `width` can also be a scalar, specifying a single value for the width of all stream tubes.

`streamtube(vertices)` selects the width automatically.

`streamtube(...,[scale n])` scales the width of the tubes by `scale`. The default is `scale = 1`. When the stream tubes are created, using start points or divergence, specifying `scale = 0` suppresses automatic scaling. `n` is the number of points along the circumference of the tube. The default is `n = 20`.

`streamtube(axes_handle,...)` plots into the axes object with the handle `axes_handle` instead of into the current axes object (`gca`).

`h = streamtube(...z)` returns a vector of handles (one per start point) to `surface` objects used to draw the stream tubes.

Examples

Visualize flow

Use the `streamtube` function to indicate flow in the `wind` data set. The inputs include the coordinates, vector field components, and starting location for the stream tubes.

```
load wind
[sx,sy,sz] = meshgrid(80,20:10:50,0:5:15);
```

```
streamtube(x,y,z,u,v,w,sx,sy,sz);
view(3);
axis tight
shading interp;
camlight;
lighting gouraud
```

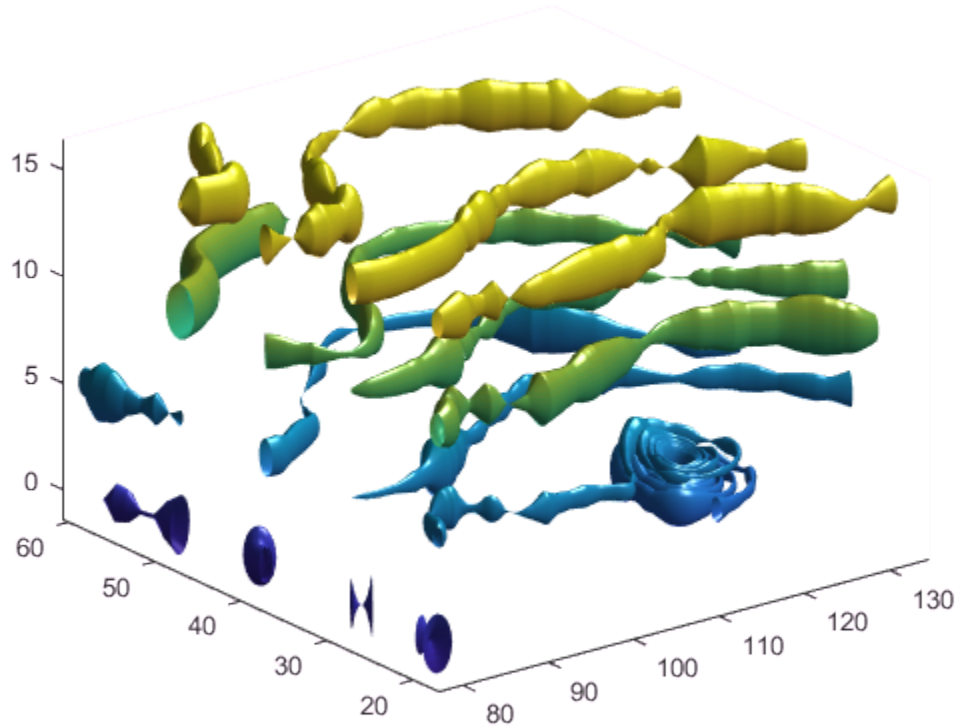

Visualize Flow Using Vertex Data and Divergence

Use vertex data returned by the `stream3` function and divergence data to visualize flow.

```
load wind
[sx,sy,sz] = meshgrid(80,20:10:50,0:5:15);
```

```
verts = stream3(x,y,z,u,v,w,sx,sy,sz);
div = divergence(x,y,z,u,v,w);
streamtube(verts,x,y,z,-div);
view(3);
axis tight
shading interp
camlight
lighting gouraud
```

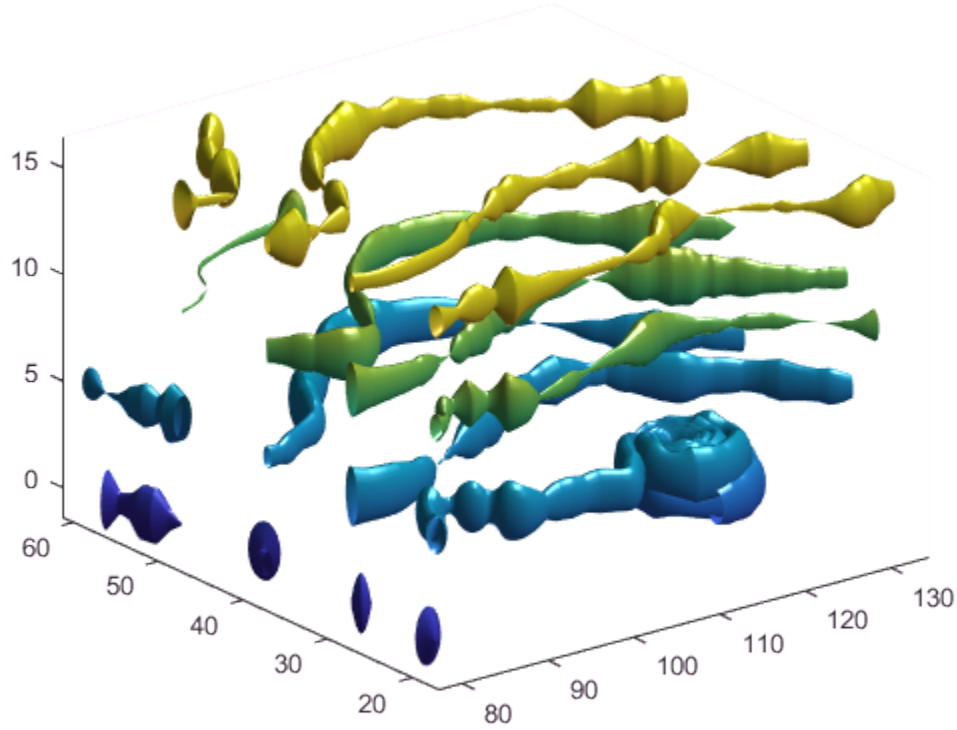

See Also

divergence | streamribbon | streamline | stream3 | meshgrid | stream3

Topics

Displaying Divergence with Stream Tubes
Specifying Starting Points for Stream Plots

Introduced before R2006a

strfind

Find one string within another

Syntax

```
k = strfind(str,pattern)
k = strfind(str,pattern,'ForceCellOutput',cellOutput)
```

Description

`k = strfind(str,pattern)` searches `str` for occurrences of `pattern`. The output, `k`, indicates the starting index of each occurrence of `pattern` in `str`. If `pattern` is not found, then `strfind` returns an empty array, `[]`. The `strfind` function executes a case-sensitive search.

- If `str` is a character vector or a string scalar, then `strfind` returns a vector of type `double`.
- If `str` is a cell array of character vectors or a string array, then `strfind` returns a cell array of vectors of type `double`.

`k = strfind(str,pattern,'ForceCellOutput',cellOutput)` forces `strfind` to return `k` as a cell array when `cellOutput` is true, even when `str` is a character vector.

Examples

Find Pattern in Character Vector

Find the starting indices for occurrences of patterns in a character vector.

First, create a character vector.

```
str = 'Find the starting indices of a pattern in a character vector';
```

Find the pattern `in`.

```
k = strfind(str,'in')
```

```
k =

     2    15    19    40
```

There are four instances of the pattern in `str`.

Find the pattern `In`.

```
k = strfind(str,'In')
```

```
k =

     []
```

Since `strfind` is case sensitive, the pattern is not found. `k` is an empty array.

Find the blank spaces in `str`.

```
k = strfind(str,' ')
```

```
k =

     5     9    18    26    29    31    39    42    44    54
```

There are ten blank spaces in `str`.

Find Pattern in Cell Array

Find the starting indices for occurrences of a pattern in a cell array of character vectors.

Create a cell array of character vectors.

```
str = {'How much wood would a woodchuck chuck';
       'if a woodchuck could chuck wood?'};
```

Find the pattern `wood` in `str`.

```
idx = strfind(str,'wood')
```

```
idx = 2×1 cell array
```

```
    [1×2 double]
    [1×2 double]
```

Examine the output cell array to find the instances of the pattern.

```
idx{:,:}
```

```
ans =

    10    23


ans =

     6    28
```

The pattern `wood` occurs at indices 10 and 23 in the first character vector and at indices 6 and 28 in the second character vector.

Return Indices in Cell Array

Find the occurrences of a pattern in a character vector. Force `strfind` to return the indices of those occurrences in a cell array. Then display the indices.

Create a character vector and find the occurrences of the pattern `ain`.

```
str = 'The rain in Spain.';
k = strfind(str,'ain','ForceCellOutput',true)
```

```
k = cell
    [1×2 double]
```

`strfind` returns a scalar cell that contains a numeric array, which contains indices of occurrences of the pattern `ain` in `str`. To access the numeric array within the cell, use curly braces.

```
k{1}
```

```
ans =
```

```
6     15
```

Input Arguments

`str` — Data to be searched

character vector | cell array of character vectors | string array

Data to be searched, specified as a character vector, a cell array of character vectors, or a string array.

Data Types: `char` | `cell` | `string`

`pattern` — Search pattern

character vector | string scalar

Search pattern, specified as a character vector or a string scalar.

Data Types: `char` | `string`

`cellOutput` — Indicator for forcing output to be returned as cell array

`false` (default) | `true` | `0` | `1`

Indicator for forcing output to be returned as a cell array, specified as `false`, `true`, `0`, or `1`.

Data Types: `logical`

Output Arguments

`k` — Indices of occurrences of `pattern`

array

Indices of occurrences of `pattern`, returned as an array. If `pattern` is not found, then `k` is an empty array, `[]`.

- If `str` is a character vector or a string scalar, `k` is a vector of doubles indicating the index of each occurrence of `pattern`.

- If `str` is a cell array of character vectors or a string array, `k` is a cell array. For each piece of text in `str`, the corresponding cell of `k` contains a vector of doubles indicating the index of each occurrence of `pattern`.

Tips

- If `pattern` is a character vector or string scalar with no characters (`''` or `""`), then `strfind` returns an empty array.
- Starting in R2016b, the `contains` function is recommended for finding patterns within string arrays.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- The text input must be a tall array of strings or a tall cell array of character vectors.
- The text pattern must be a non-tall single string.
- The output is a cell array of index vectors, with one element per input string.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input data must be specified as a character vector. Cell arrays are not supported.
- Generated code returns an empty output as a 1-by-0 character array.

See Also

See Also

`contains` | `regexp` | `regexpi` | `regexprep` | `strcmp` | `strcmpi` | `strncmp` | `strncmpi` | `strrep` | `strsplit` | `strtok`

Introduced before R2006a

string

Convert to string array

Syntax

```
str = string(A)
```

```
str = string(D)
str = string(D,fmt)
str = string(D,fmt,locale)
```

Description

`str = string(A)` converts the input array to a string array. For more information on string arrays, see "Characters and Strings".

- If `A` is a character vector, then `string` converts `A` to a string scalar. `str` and `A` have the same characters in the same order.
- If `A` is a cell array, then `string` converts each element in `A` into a string element in `str`.
- If `A` is a numeric array, then `string` converts each number to a string element in `str`.

  Unlike the `char` function, `string` does not treat numbers as ASCII or Unicode code points.
- If `A` is a logical array, then `string` converts each value to either `"false"` or `"true"`.
- If `A` is `[]`, then `string` returns a `0`-by-`0` string array.

Note: Starting in R2017a, you can create strings using double quotes instead of the `string` function.

`str = string(D)` converts a datetime, duration, or calendar duration array into a string array in the format specified by the `Format` property of `D`. The output contains one date or duration in each row.

`str = string(D,fmt)` represents dates or durations in the specified format, such as `'HH:mm:ss'`.

`str = string(D,fmt,locale)` represents dates or durations in the specified locale, such as `'en_US'`. The locale affects the language used to represent character vectors such as month and day names.

Examples

Convert Character Vector to String

```
A = 'Four score and seven years ago'
```

```
A =
'Four score and seven years ago'
```

```
str = string(A)
```

```
str =
"Four score and seven years ago"
```

`str` is a string scalar containing the same characters as `A`.

Starting in R2017a, you also can create a string using double quotes.

```
str = "To be, or not to be"
```

```
str =
"To be, or not to be"
```

Convert Cell Array to String Array

Convert a cell array of character vectors to a string array.

```
A = {'Mercury','Gemini','Apollo';...
     'Skylab','Skylab B','ISS'}
```

```
A = 2×3 cell array
    'Mercury'    'Gemini'      'Apollo'
    'Skylab'     'Skylab B'    'ISS'
```

```
str = string(A)
```

```
str = 2×3 string array
    "Mercury"    "Gemini"      "Apollo"
    "Skylab"     "Skylab B"    "ISS"
```

Access the second element in the first row of `str` by indexing with smooth parentheses. You can access strings in a string array with matrix indexing, just as you would access elements of a numeric array.

```
str(1,2)
```

```
ans =
"Gemini"
```

Access the third column.

```
str(:,3)
```

```
ans = 2×1 string array
    "Apollo"
    "ISS"
```

Starting in R2017a, you also can create a string array using double quotes and the `[ ]` operator.

```
str = ["Mercury","Venus","Earth"]
```

```
str = 1×3 string array
    "Mercury"    "Venus"    "Earth"
```

Convert Numeric Array to String Array

```
A = [77 65 84 76 65 66]
```

```
A =

    77    65    84    76    65    66
```

```
str = string(A)
```

```
str = 1×6 string array
    "77"    "65"    "84"    "76"    "65"    "66"
```

`str` is a string array in which each element represents a number from `A`. Note that `string` does not treat numbers as ASCII or Unicode® values.

Convert Duration Array to String Array

Create a `duration` array.

```
D = hours(23:25) + minutes(8) + seconds(1.2345)
```

```
D = 1×3 duration array
   23.134 hr   24.134 hr   25.134 hr
```

Convert `D` to a string array.

```
str = string(D)
```

```
str = 1×3 string array
    "23.134 hr"    "24.134 hr"    "25.134 hr"
```

`str` is a string array with one duration value per element. `str` is the same size as `D`.

Specify the format of the duration values in `str`.

```
str = string(D,'hh:mm')
```

```
str = 1×3 string array
    "23:08"    "24:08"    "25:08"
```

- "Create String Arrays"
- "Analyze Text Data with String Arrays"
- "Search and Replace Text"
- "Compare Text"
- "Test for Empty Strings and Missing Values"
- "Formatting Text"

Input Arguments

A — Input array

array

Input array.

Data Types: `char` | `cell` | `string` | `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `categorical`

`D` — Input date and time

date or duration array

Input date and time, specified as a date or duration array.

Data Types: `datetime` | `duration` | `calendarDuration`

`fmt` — Date format

character vector

Date format, specified as a character vector. The supported formats depend on the data type of input `D`.

- `datetime` formats can include combinations of units and delimiters, such as `'yyyy-MMM-dd HH:mm:ss.SSS'`. For details, see the Format property for datetime arrays.
- `duration` formats are either single characters (`'y'`, `'d'`, `'h'`, `'m'`, or `'s'`) or one of these combinations:
  - `'dd:hh:mm:ss'`
  - `'hh:mm:ss'`
  - `'mm:ss'`
  - `'hh:mm'`
  - Any of the above, with up to nine `S` characters to indicate fractional second digits, such as `'hh:mm:ss.SSSS'`
- `calendarDuration` formats can include combinations of the characters `'y'`, `'q'`, `'m'`, `'w'`, `'d'`, and `'t'` in order from largest to smallest unit of time, such as `'ym'`.

For more information on the `duration` and `calendarDuration` formats, see "Set Date and Time Display Format".

`locale` — Locale of the character vectors to create

character vector

Locale of the character vectors to create, specified as a character vector.

`locale` can be:

- `'system'`, to specify your system locale.
- a character vector in the form *xx_YY*, where *xx* is a lowercase ISO 639-1 two-letter code that specifies a language, and *YY* is an uppercase ISO 3166-1 alpha-2 code that specifies a country.

These are the same character vectors accepted by the `'Locale'` name-value pair argument for the `datetime` function. The locale affects the language used in the output array.

Example: `'en_US'`

Example: `'ja_JP'`

Output Arguments

`str` — Output array
string array

Output array, returned as a string array.

Text processing functions (such as `strfind` and `regexp`) accept string arrays as inputs, but other functions (for example, `addpath`) do not.

Tips

- If the input argument is an object, then it must belong to a class that implements a `string` method to represent the object as a string.
- To convert scalar strings to character vectors, use the `char` function.
- To convert string arrays to cell arrays of character vectors, use the `cellstr` function.
- To convert string arrays to numeric arrays, use the `double` function.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`calendarDuration` | `categorical` | `cellstr` | `char` | `datetime` | `double` | `duration` | `iscellstr` | `ischar` | `isstring` | `isstrprop` | `strings` | `strlength`

Topics

“Create String Arrays”
“Analyze Text Data with String Arrays”
“Search and Replace Text”
“Compare Text”
“Test for Empty Strings and Missing Values”
“Formatting Text”
“Locale Settings for MATLAB Process”

Introduced in R2016b

strings

Create array of strings with no characters

Syntax

```
str = strings
str = strings(n)
str = strings(sz1,...,szN)
str = strings(sz)
```

Description

`str = strings` returns a string with no characters. For more information on string arrays, see "Characters and Strings".

Note: Starting in R2017a, you also can create strings with no characters using double quotes. For example, `str = ""` creates a string scalar that contains no characters.

`str = strings(n)` returns an `n`-by-`n` array of strings with no characters.

`str = strings(sz1,...,szN)` returns a `sz1`-by-...-by-`szN` array of strings with no characters, where `sz1,...,szN` indicate the size of each dimension. For example, `strings(2,3)` returns a 2-by-3 array of strings.

`str = strings(sz)` returns an array of strings with no characters, where size vector `sz` defines `size(str)`. For example, `strings([2,3])` returns a 2-by-3 array of strings.

Examples

Square Array of Empty Strings

```
str = strings(4)
```

```
str = 4×4 string array
     ""     ""     ""     ""
     ""     ""     ""     ""
```

```
     ""      ""      ""      ""
     ""      ""      ""      ""
```

Rectangular Array of Empty Strings

```
str = strings([2,6])
```

```
str = 2×6 string array
     ""      ""      ""      ""      ""      ""
     ""      ""      ""      ""      ""      ""
```

Clone String Array Size from Existing Array

Create an array of empty strings that is the same size as an existing array.

```
A = [1 2 3; 4 5 6];
sz = size(A);
str = strings(sz)
```

```
str = 2×3 string array
     ""      ""      ""
     ""      ""      ""
```

It is a common pattern to combine the previous two lines of code into a single line:

```
str = strings(size(A));
```

You can use `strings` to preallocate the space required for a large string array.

- "Create String Arrays"
- "Analyze Text Data with String Arrays"
- "Test for Empty Strings and Missing Values"

Input Arguments

n — Size of square array
nonnegative integer

Size of a square array, specified as a nonnegative integer.

- If `n` is `0`, then `str` is an empty array.
- If `n` is negative, then `strings` treats `n` as `0`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz1,...,szN` — Size of each dimension (as separate arguments)

nonnegative integers

Size of each dimension, specified as separate nonnegative integer arguments.

- If the size of any dimension is `0`, then `str` is an empty array.
- If the size of any dimension is negative, then `strings` treats it as `0`.
- Beyond the second dimension, `strings` ignores trailing dimensions with a size of `1`. For example, `strings(3,1,1,1)` produces a 3-by-1 vector of strings with no characters.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`sz` — Size of each dimension (as a row vector)

nonnegative integers

Size of each dimension, specified as a row vector of nonnegative integers. Each element of this vector indicates the size of the corresponding dimension:

- If the size of any dimension is `0`, then `str` is an empty array.
- If the size of any dimension is negative, then `strings` treats it as `0`.
- Beyond the second dimension, `strings` ignores trailing dimensions with a size of `1`. For example, `strings([3,1,1,1])` produces a 3-by-1 vector of strings with no characters.

Example: `sz = [2,3,4]` creates a 2-by-3-by-4 array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

See Also

See Also

`cellstr` | `char` | `empty` | `isempty` | `isstring` | `size` | `string` | `strlength` | `zeros`

Topics

"Create String Arrays"
"Analyze Text Data with String Arrays"
"Test for Empty Strings and Missing Values"
"Preallocation"

Introduced in R2016b

strip

Remove leading and trailing characters from string

Syntax

```
newStr = strip(str)
newStr = strip(str,side)
newStr = strip( ___ ,stripCharacter)
```

Description

`newStr = strip(str)` removes all consecutive whitespace characters from the beginning and end of each string in `str`, and returns the result as `newStr`.

`newStr = strip(str,side)` removes all consecutive whitespace characters from the side specified by `side`. The `side` argument can be `'left'`, `'right'`, or `'both'`.

`newStr = strip( ___ ,stripCharacter)` strips the character specified by `stripCharacter`, instead of the space character. You can use any of the input arguments in the previous syntaxes.

Examples

Strip Leading and Trailing Spaces from Strings

Create a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["Ann Marie      ";
       "          James";
       "Pauline        "]
```

```
str = 3×1 string array
    "Ann Marie      "
    "          James"
    "Pauline        "
```

Delete the leading and trailing space characters in each string.

```
newStr = strip(str)
```

```
newStr = 3×1 string array
    "Ann Marie"
    "James"
    "Pauline"
```

Strip Spaces from Side of String

Create a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["   Ann Marie   ";
       "   James       ";
       "   Pauline     "]
```

```
str = 3×1 string array
    "   Ann Marie   "
    "   James       "
    "   Pauline     "
```

Delete space characters from the right side only.

```
newStr = strip(str,'right')
```

```
newStr = 3×1 string array
    "   Ann Marie"
    "   James"
    "   Pauline"
```

Strip Different Character from String Array

Create a string array with elements that represent numbers. Starting in R2017a, you can create strings using double quotes instead of the `string` function. The strings include leading zeroes that make them all the same length.

```
str = ["0095.36";
       "0003.44";
```

```
       "0007.82"]
```

```
str = 3×1 string array
    "0095.36"
    "0003.44"
    "0007.82"
```

Delete the leading zeroes.

```
newStr = strip(str,'left','0')
```

```
newStr = 3×1 string array
    "95.36"
    "3.44"
    "7.82"
```

- "Create String Arrays"
- "Search and Replace Text"
- "Analyze Text Data with String Arrays"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`side` — Side of string to strip

`'both'` (default) | `'left'` | `'right'`

Side of string to strip, specified as `'left'`, `'right'`, or `'both'`. The default behavior of `strip` is to strip characters from both the left and the right side of the input text.

Data Types: `char` | `string`

`stripCharacter` — Character to strip from input text

`' '` (default) | character | string

Character to strip from input text, specified as a character or as a string that contains one character.

Data Types: `char` | `string`

Output Arguments

`newStr` — Output text
string array | character vector | cell array of character vectors

Output text, returned as a string array, a character vector, or a cell array of character vectors. `str` and `newStr` are the same data type.

Data Types: `string` | `char` | `cell`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

See Also

See Also
`erase` | `join` | `pad` | `replace` | `split` | `strsplit`

Topics
"Create String Arrays"
"Search and Replace Text"
"Analyze Text Data with String Arrays"

Introduced in R2016b

strjoin

Join text in array

Syntax

```
str = strjoin(C)
str = strjoin(C,delimiter)
```

Description

`str = strjoin(C)` constructs a single piece of text, `str`, by linking each element in the array, `C`, with a single space. `C` can be a cell array of character vectors or a string array.

`str = strjoin(C,delimiter)` constructs `str` by linking each element of `C` with the elements in `delimiter`.

Examples

Join List of Words with Whitespace

Join individual character vectors in a cell array of character vectors, `C`, with a single space.

```
C = {'one','two','three'};
str = strjoin(C)
```

```
str =
'one two three'
```

Join Cell Array of Character Vectors with Delimiter

Join the character vectors in a cell array into one character vector. Specify a comma followed by a space character as the delimiter.

```
C = {'Newton','Gauss','Euclid','Lagrange'}
```

```
C = 1×4 cell array
    'Newton'    'Gauss'    'Euclid'    'Lagrange'
```

```
str = strjoin(C,', ')
```

```
str =
'Newton, Gauss, Euclid, Lagrange'
```

Join Character Vectors with Multiple Different Delimiters

Specify multiple different delimiters in a cell array of character vectors. The `delimiter` cell array must have one fewer element than `C`.

```
C = {'one','two','three'};
str = strjoin(C,{' + ',' = '})
```

```
str =
'one + two = three'
```

Input Arguments

`C` — Input text
1-by-N cell array of character vectors | 1-by-N string array

Input text, specified as a 1-by-N cell array of character vectors or string array.

Example: `{'The','rain','in','Spain'}`

Example: `string({'Four','score','and','seven'})`

Data Types: `cell` | `string`

`delimiter` — Delimiting characters
character vector | 1-by-N cell array of character vectors | 1-by-N string array

Delimiting characters, specified as a character vector, a 1-by-N cell array of character vectors, or a 1-by-N string array.

- If `delimiter` is a character vector, then `strjoin` forms `str` by inserting `delimiter` between each element of `C`. The `delimiter` input can include any of these escape sequences:

`\\`	Backslash
`\0`	Null
`\a`	Alarm
`\b`	Backspace
`\f`	Form feed
`\n`	New line
`\r`	Carriage return
`\t`	Horizontal tab
`\v`	Vertical tab

- If `delimiter` is a cell array of character vectors, then it must contain one fewer element than `C`. Each element in the cell array must contain a character vector. `strjoin` forms `str` by interleaving the elements of `delimiter` and `C`. All characters in `delimiter` are inserted as literal text, and escape sequences are not supported.

Example: `', '`

Example: `{',',' '}`

Data Types: `char` | `cell` | `string`

Tips

- Starting in R2016b, the `join` function is recommended to join elements of a string array.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Generated code returns an empty output as a 1-by-0 character array.

See Also

See Also

`cellstr` | `join` | `regexp` | `strcat` | `strsplit`

Introduced in R2013a

strlength

Length of strings in string array

Syntax

```
L = strlength(str)
```

Description

`L = strlength(str)` returns the number of characters in each element of the input string array. The size of `L` is the same as the size of `str`.

Examples

Number of Characters in Single String

Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "Hello, World"
```

```
str =
"Hello, World"
```

Return the number of characters in `str`.

```
L = strlength(str)
```

```
L = 12
```

Length of Each String in String Array

Create a string array using the `[]` operator. `str` is a 2-by-3 string array that contains six strings.

```
str = ["Amis","Chekhov","Joyce";"Stein","","Proust"]
```

```
str = 2×3 string array
    "Amis"     "Chekhov"    "Joyce"
    "Stein"    ""           "Proust"
```

Find the length of each string in `str`. Use `strlength`, not `length`, to determine the number of characters in each element of a string array.

```
L = strlength(str)
```

```
L =

     4     7     5
     5     0     6
```

Number of Characters in Character Vector

Create a character vector. To return the number of characters in the character vector, use the `strlength` function.

```
chr = 'The rain in Spain.'
```

```
chr =
'The rain in Spain.'
```

```
L = strlength(chr)
```

```
L = 18
```

- "Create Character Arrays"
- "Create String Arrays"
- "Analyze Text Data with String Arrays"
- "Search and Replace Text"
- "Compare Text"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Tips

To find the number of characters in each element of `str`, use `strlength`. To find the length of the largest array dimension of `str`, use the `length` function.

Algorithms

`strlength` counts the number of *code units* in a string. Code units are bit sequences for encoding characters of a character encoding system. In some character encodings, such as UTF-16, there are some characters that are encoded with multiple code units.

If you have a string or a character vector that contains such characters, then the number of code units is greater than the number of characters.

`length(C)` also returns the number of code units when `C` is a character vector.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`isstring` | `length` | `ndims` | `numel` | `size` | `string`

Topics

"Create Character Arrays"
"Create String Arrays"
"Analyze Text Data with String Arrays"
"Search and Replace Text"
"Compare Text"

Introduced in R2016b

strjust

Justify string or character array

Syntax

```
newTxt = strjust(txt)
newTxt = strjust(txt,side)
```

Description

`newTxt = strjust(txt)` returns a right-justified version of the text in `txt`.

- If `txt` has trailing whitespace characters, then they become leading whitespace characters in `newTxt`.
- If `txt` does not have trailing whitespace characters, then `strjust` returns `txt` unaltered.

`newTxt = strjust(txt,side)` returns a version of the text that is justified on the side specified by `side`. The text in `txt` can be justified on the left, right, or center.

Examples

Right-Justify Text

Create a string array in which some elements have trailing whitespace characters. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str1 = ["Skylab";
        "Mir   ";
        "ISS   "]
```

```
str1 = 3×1 string array
    "Skylab"
    "Mir   "
    "ISS   "
```

Justify the text on the right. `strjust` does not alter the first element because `"Skylab"` has no whitespace.

```
str2 = strjust(str1)
```

```
str2 = 3×1 string array
    "Skylab"
    "   Mir"
    "   ISS"
```

Center-Justify Text

Create a cell array of character vectors. Some of the character vectors have leading and trailing whitespace characters.

```
C1 = {'Euler    ';
      'Fibonacci';
      '    Gauss'}
```

```
C1 = 3×1 cell array
    'Euler    '
    'Fibonacci'
    '    Gauss'
```

Center-justify the text. If a piece of text has leading or trailing whitespace, or both, then `strjust` adjusts the text to have an equal number of leading and trailing whitespace characters. `strjust` does not alter a piece of text when it has neither leading nor trailing whitespace.

```
C2 = strjust(C1,'center')
```

```
C2 = 3×1 cell array
    '  Euler  '
    'Fibonacci'
    '  Gauss  '
```

- “Formatting Text”
- “Search and Replace Text”

Input Arguments

`txt` — Input text

character array | cell array of character vectors | string array

Input text, specified as a character array, a cell array of character vectors, or a string array.

Data Types: `char` | `cell` | `string`

`side` — Side to justify text on

`'right'` (default) | `'left'` | `'center'`

Side to justify text on, specified as `'left'`, `'right'`, or `'center'`. The default behavior is to justify the text on the right.

Data Types: `char` | `string`

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input text must be specified as a character array. Cell arrays are not supported.
- Generated code returns an empty output as a 1-by-0 character array.

See Also

See Also

`deblank` | `pad` | `strip` | `strtrim`

Topics

"Formatting Text"

"Search and Replace Text"

Introduced before R2006a

strmatch

Find possible matches for string

Note: `strmatch` is not recommended. Use `strncmp` or `validatestring`, depending on your requirements, instead. `strncmp` returns a logical array indicating which array elements begin with the specified string, whereas `validatestring` returns a single string that represents the best match to the specified string. See Example 2, below.

To find an exact match for a string, use `strcmp`.

Syntax

```
x = strmatch(str, strarray)
x = strmatch(str, strarray, 'exact')
```

Description

`x = strmatch(str, strarray)` looks through the rows of the character array or cell array of strings `strarray` to find strings that begin with the text contained in `str`, and returns the matching row indices. If `strmatch` does not find `str` in `strarray`, `x` is an empty matrix (`[ ]`). Any trailing space characters in `str` or `strarray` are ignored when matching. `strmatch` is fastest when `strarray` is a character array.

`x = strmatch(str, strarray, 'exact')` compares `str` with each row of `strarray`, looking for an exact match of the entire strings. Any trailing space characters in `str` or `strarray` are ignored when matching.

Examples

Example 1

The statement

```
x = strmatch('max', char('max', 'minimax', 'maximum'))
```

returns `x = [1; 3]` since rows 1 and 3 begin with `'max'`. The statement

```
x = strmatch('max', char('max', 'minimax', 'maximum'),'exact')
```

returns `x = 1`, since only row 1 matches `'max'` exactly.

Example 2

This example shows how to replace use of the `strmatch` function with `validatestring` or `strncmp`.

To start with, use `strmatch` to return the index of those elements for which there is a match:

```
list = {'max', 'minimax', 'maximum', 'max'}
x = strmatch('max',list)
x =
     1
     3
     4
```

`validatestring` returns the string representing the best match. If multiple or no matches exist, this statement would return an error:

```
list = {'max', 'minimax', 'maximum', 'max'};
x = validatestring('max', list)
x =
   max
```

`strncmp` returns a logical array indicating which strings match the specified string:

```
list = {'max', 'minimax', 'maximum', 'max'};
x = strncmp('max', list, 3)
x =
     1     0     1     1
```

If you prefer that MATLAB return the numeric indices of `list`, use `find` as follows:

```
list = {'max', 'minimax', 'maximum', 'max'}
x = find(strncmp(list, 'max', 3))
```

If your input to `strmatch` is a character matrix, then first convert the matrix to a cell array using `cellstr`. Then, pass the output from `cellstr` to `strncmp` or `validatestring`

See Also

`strcmp` | `strcmpi` | `strncmp` | `strncmpi` | `strfind` | `regexp` | `regexpi` | `regexprep`

Introduced before R2006a

strncmp

Compare first n characters of strings (case sensitive)

Syntax

```
tf = strncmp(s1,s2,n)
```

Description

`tf = strncmp(s1,s2,n)` compares the first `n` characters of `s1` and `s2`. The function returns `1` (`true`) if the two are identical and `0` (`false`) otherwise. Text is considered identical if the size and content of each are the same, up to the first `n` characters of each piece of text. The return result `tf` is of data type `logical`.

The first two input arguments can be any combination of string arrays, character vectors, and cell arrays of character vectors.

Examples

Compare First N Characters of Character Vectors

Create two different character vectors. Compare the first 11 characters of them.

```
s1 = 'Kansas City, KS';
s2 = 'Kansas City, MO';
tf = strncmp(s1,s2,11)
```

```
tf = logical
   1
```

`tf` is `1` because both character vectors start with `'Kansas City'`.

Compare the two character vectors using `strcmp`.

```
tf = strcmp(s1,s2)
```

```
tf = logical
```

```
   0
```

`tf` is `0` because `s1` and `s2` end with different characters.

Find Text That Starts with Same Characters

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Create a string array that contains names. Find the names that start with `'Jean'`.

```
s1 = ["Jacques";
      "Jean";
      "Jeanne";
      "Jean-Luc";
      "Julie"];
s2 = "Jean";

tf = strncmp(s1,s2,4)
```

```
tf = 5×1 logical array
   0
   1
   1
   1
   0
```

`tf` is `1` for all names whose first four characters are `'Jean'`.

Alternatively, you can use the `startsWith` function.

```
tf = startsWith(s1,s2)
```

```
tf = 5×1 logical array
   0
   1
   1
   1
   0
```

- "Compare Text"

Input Arguments

s1,s2 — Input text

character vector | character array | cell array of character vectors | string array

Input text, with each input specified as a character vector, a character array, a cell array of character vectors, or a string array. The order of the inputs does not affect the comparison results.

- If both s1 and s2 are string arrays or cell arrays of character vectors, then s1 and s2 must be the same size, unless one of them is scalar.
- If both s1 and s2 are character arrays with multiple rows, then s1 and s2 can have different numbers of rows.
- When comparing a nonscalar cell array of character vectors or string array to a multirow character array, the cell array or string array must be a column vector with the same number of rows as the character array.

Data Types: char | cell | string

n — Number of characters to compare

integer

Number of characters to compare, specified as an integer.

- If n is 0, then strncmp always returns 1. By convention, the zeroth character of a character vector or a string scalar is always '', a 0-by-0 character array.
- If n is less than 0, then strncmp treats it as 0.
- If n is greater than the length of the shortest input text, then strncmp returns 0.

Data Types: double | single | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

Output Arguments

tf — True or false result

1 | 0 | logical array

True or false result, returned as a 1 or 0 of data type logical.

- If each input is either a string scalar or a character vector, then `tf` is a scalar.
- If at least one input is either a string array or a cell array of character vectors, then `tf` is an array the same size as the input array.
- If one input is a character array with multiple rows, and the other input is either a scalar cell or a string scalar, then `tf` is an `n`-by-`1` array, where `n` is the number of rows in the character array.
- If both inputs are character arrays, then `tf` is a scalar.

Tips

- The `strncmp` function is intended for comparison of text. If used on numeric arrays, `strncmp` always returns `0`.
- For case-insensitive text comparison, use `strncmpi` instead of `strncmp`.
- Although `strncmp` shares a name with a C function, it does not follow the C language convention of returning `0` when the text inputs match.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Enumeration inputs are not supported.

- When one input is a cell array and the other input is a character array, the character array must be a compile-time row vector.

See Also

See Also

`endsWith` | `eq` | `ne` | `regexp` | `regexpi` | `sort` | `startsWith` | `strcmp` | `strcmpi` | `strfind` | `strncmpi`

Topics

"Compare Text"

Introduced before R2006a

strncmpi

Compare first n characters of strings (case insensitive)

Syntax

```
tf = strncmpi(s1,s2,n)
```

Description

`tf = strncmpi(s1,s2,n)` compares the first `n` characters of `s1` and `s2`, ignoring any differences in letter case. The function returns `1` (`true`) if the two are identical and `0` (`false`) otherwise. Text is considered identical if the size and content of each are the same, up to the first `n` characters of each piece of text, ignoring case. The return result `tf` is of data type `logical`.

The first two input arguments can be any combination of string arrays, character vectors, and cell arrays of character vectors.

Examples

Compare First N Characters While Ignoring Case

Create two character vectors. Compare the first four characters of each, ignoring case.

```
s1 = 'DATA.TAR.GZ';
s2 = 'data-samples.xls';

tf = strncmpi(s1,s2,4)

tf = logical
   1
```

`tf` is `1` because `s1` starts with `'DATA'`, and `s2` starts with `'data'`.

Find Starting Text While Ignoring Case

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Create a string array that contains names. Find the names that start with `'JEAN'`, ignoring case.

```
s1 = ["Jacques";
      "Jean";
      "Jeanne";
      "Jean-Luc";
      "Julie"];
s2 = "JEAN";
```

```
tf = strncmpi(s1,s2,4)
```

```
tf = 5×1 logical array
   0
   1
   1
   1
   0
```

`tf` is `1` for all names whose first four characters match `'JEAN'` when you ignore case.

Alternatively, you can use the `startsWith` function.

```
tf = startsWith(s1,s2,'IgnoreCase',true)
```

```
tf = 5×1 logical array
   0
   1
   1
   1
   0
```

- "Compare Text"

Input Arguments

`s1,s2` — Input text

character vector | character array | cell array of character vectors | string array

Input text, with each input specified as a character vector, a character array, a cell array of character vectors, or a string array. The order of the inputs does not affect the comparison results.

- If both `s1` and `s2` are string arrays or cell arrays of character vectors, then `s1` and `s2` must be the same size, unless one of them is scalar.
- If both `s1` and `s2` are character arrays with multiple rows, then `s1` and `s2` can have different numbers of rows.
- When comparing a nonscalar cell array of character vectors or string array to a multirow character array, the cell array or string array must be a column vector with the same number of rows as the character array.

Data Types: `char` | `cell` | `string`

n — Number of characters to compare

integer

Number of characters to compare, specified as an integer.

- If `n` is `0`, then `strncmpi` always returns `1`. By convention, the zeroth character of a character vector or a string scalar is always `''`, a `0`-by-`0` character array.
- If `n` is less than `0`, then `strncmpi` treats it as `0`.
- If `n` is greater than the length of the shortest input text, then `strncmpi` returns `0`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

tf — True or false result

`1` | `0` | logical array

True or false result, returned as a `1` or `0` of data type `logical`.

- If each input is either a string scalar or a character vector, then `tf` is a scalar.
- If at least one input is either a string array or a cell array of character vectors, then `tf` is an array the same size as the input array.
- If one input is a character array with multiple rows, and the other input is either a scalar cell or a string scalar, then `tf` is an `n`-by-`1` array, where `n` is the number of rows in the character array.

- If both inputs are character arrays, `tf` is a scalar.

Tips

- The `strncmpi` function is intended for comparison of text. If used on numeric arrays, `strncmpi` always returns `0`.
- For case-sensitive text comparison, use `strncmp` instead of `strncmpi`.
- Although `strncmpi` shares a name with a C function, it does not follow the C language convention of returning `0` when the text inputs match.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Enumeration inputs are not supported.
- Input values from the `char` class must be in the range 0-127.
- When one input is a cell array and the other input is a character array, the character array must be a compile-time row vector.

See Also

See Also

`endsWith` | `eq` | `ne` | `regexp` | `regexpi` | `sort` | `startsWith` | `strcmp` | `strcmpi` | `strfind` | `strncmp`

Topics

"Compare Text"

Introduced before R2006a

strread

Read formatted data from string

Note `strread` is not recommended. Use `textscan` instead.

Syntax

```
A = strread('str')
[A, B, ...] = strread('str')
[A, B, ...] = strread('str', 'format')
[A, B, ...] = strread('str', 'format', N)
[A, B, ...] = strread('str', 'format', N, param, value, ...)
```

Description

`A = strread('str')` reads numeric data from input string `str` into a 1-by-`N` vector `A`, where `N` equals the number of whitespace-separated numbers in `str`. Use this form only with strings containing numeric data. See "Example 1" on page 1-10998 below.

`[A, B, ...] = strread('str')` reads numeric data from the string input `str` into scalar output variables `A`, `B`, and so on. The number of output variables must equal the number of whitespace-separated numbers in `str`. Use this form only with strings containing numeric data. See "Example 2" on page 1-10998 below.

`[A, B, ...] = strread('str', 'format')` reads data from `str` into variables `A`, `B`, and so on using the specified `format`. The number of output variables `A`, `B`, etc. must be equal to the number of format specifiers (e.g., `%s` or `%d`) in the `format` argument. You can read all of the data in `str` to a single output variable as long as you use only one format specifier in the command. See "Example 4" on page 1-10998 and "Example 5" on page 1-10999 below.

The table Formats for strread lists the valid format specifiers. More information on using formats is available under "Formats" on page 1-11001 in the "Tips" on page 1-11001 section below.

`[A, B, ...] = strread('str', 'format', N)` reads data from `str` reusing the `format` string `N` times, where `N` is an integer greater than zero. If `N` is -1, `strread` reads the entire string. When `str` contains only numeric data, you can set `format` to the empty string (`''`). See "Example 3" on page 1-10998 below.

`[A, B, ...] = strread('str', 'format', N, param, value, ...)` customizes `strread` using `param/value` pairs, as listed in the table Parameters and Values for strread below. When `str` contains only numeric data, you can set `format` to the empty string (`''`). The `N` argument is optional and may be omitted entirely. See "Example 7" on page 1-11000 below.

Formats for strread

Format	Action	Output
Literals (ordinary characters)	Ignore the matching characters. For example, in a string that has `Dept` followed by a number (for department number), to skip the `Dept` and read only the number, use `'Dept'` in the `format` string.	None
`%d`	Read a signed integer value.	Double array
`%u`	Read an integer value.	Double array
`%f`	Read a floating-point value.	Double array
`%s`	Read a white-space separated string.	Cell array of strings
`%q`	Read a double quoted string, ignoring the quotes.	Cell array of strings
`%c`	Read characters, including white space.	Character array
`%[...]`	Read the longest string containing characters specified in the brackets.	Cell array of strings
`%[^...]`	Read the longest nonempty string containing characters that are not specified in the brackets.	Cell array of strings
`%*...`	Ignore the characters following `*`. See "Example 8" on page 1-11000 below.	No output

Format	Action	Output
`%w...`	Read field width specified by `w`. The `%f` format supports `%w.pf`, where `w` is the field width and `p` is the precision.	

Parameters and Values for strread

param	value		Action
`whitespace`	Any from the list below:		Treats vector of characters, `*`, as white space. Default is `\b \r\n\t`.
	`\b`	Backspace	
	`\n`	New line	
	`\r`	Carriage return	
	`\t`	Horizontal tab	
	`\\`	Backslash	
	`%%`	Percent sign	
	`''`	Single quotation mark	
`delimiter`	Delimiter character		Specifies delimiter character. Default is one or more whitespace characters.
`expchars`	Exponent characters		Default is `eEdD`.
`bufsize`	Positive integer		Specifies the maximum string length, in bytes. Default is `4095`.
`commentstyle`	`matlab`		Ignores characters after `%`.
`commentstyle`	`shell`		Ignores characters after `#`.
`commentstyle`	`c`		Ignores characters between `/*` and `*/`.
`commentstyle`	`c++`		Ignores characters after `//`.
`emptyvalue`	Value to return for empty numeric fields in delimited files		Default is `0`.

Examples

Example 1

Read numeric data into a 1-by-5 vector:

```
a = strread('0.41 8.24 3.57 6.24 9.27')
a =
    0.4100    8.2400    3.5700    6.2400    9.2700
```

Example 2

Read numeric data into separate scalar variables:

```
[a b c d e] = strread('0.41 8.24 3.57 6.24 9.27')
a =
    0.4100
b =
    8.2400
c =
    3.5700
d =
    6.2400
e =
    9.2700
```

Example 3

Read the only first three numbers in the string, also formatting as floating point:

```
a = strread('0.41 8.24 3.57 6.24 9.27', '%4.2f', 3)

a =
    0.4100
    8.2400
    3.5700
```

Example 4

Truncate the data to one decimal digit by specifying format `%3.1f`. The second specifier, `%*1d`, tells `strread` not to read in the remaining decimal digit:

```
a = strread('0.41 8.24 3.57 6.24 9.27', '%3.1f %*1d')

a =
    0.4000
    8.2000
    3.5000
    6.2000
    9.2000
```

Example 5

Read six numbers into two variables, reusing the format specifiers:

```
[a b] = strread('0.41 8.24 3.57 6.24 9.27 3.29', '%f %f')

a =
    0.4100
    3.5700
    9.2700
b =
    8.2400
    6.2400
    3.2900
```

Example 6

Read string and numeric data to two output variables. Ignore commas in the input string:

```
str = 'Section 4, Page 7, Line 26';

[name value] = strread(str, '%s %d,')
name =
    'Section'
    'Page'
    'Line'
value =
     4
     7
    26
```

Example 7

Read the string used in the last example, but this time delimiting with commas instead of spaces:

```
str = 'Section 4, Page 7, Line 26';

[a b c] = strread(str, '%s %s %s', 'delimiter', ',')
a =
    'Section 4'
b =
    'Page 7'
c =
    'Line 26'
```

Example 8

Read selected portions of the input string:

```
str = '<table border=5 width="100%" cellspacing=0>';

[border width space] = strread(str, ...
   '%*s%*s %c %*s "%4s" %*s %c', 'delimiter', '= ')
border =
     5
width =
    '100%'
space =
     0
```

Example 9

Read the string into two vectors, restricting the `Answer` values to `T` and `F`. Also note that two delimiters (comma and space) are used here:

```
str = 'Answer_1: T, Answer_2: F, Answer_3: F';

[a b] = strread(str, '%s %[TF]', 'delimiter', ', ')
a =
    'Answer_1:'
    'Answer_2:'
    'Answer_3:'
```

```
b =
    'T'
    'F'
    'F'
```

Tips

If you terminate the input string with a newline character (`\n`), `strread` returns arrays of equal size by padding arrays of lesser size with the `emptyvalue` character:

```
[A,B,C] = strread(sprintf('5,7,1,9\n'),'%d%d%d', ...
              'delimiter', ',', 'emptyvalue',NaN)
A =
     5
     9
B =
     7
   NaN
C =
     1
   NaN
```

If you remove the `\n` from the input string of this example, array `A` continues to be a 2-by-1 array, but `B` and `C` are now 1-by-1.

Delimiters

If your data uses a character other than a space as a delimiter, you must use the `strread` parameter `'delimiter'` to specify the delimiter. For example, if the string `str` used a semicolon as a delimiter, you would use this command:

```
[names, types, x, y, answer] = strread(str,'%s %s %f ...
    %d %s','delimiter',';')
```

Formats

The `format` string determines the number and types of return arguments. The number of return arguments must match the number of conversion specifiers in the `format` string.

The `strread` function continues reading `str` until the entire string is read. If there are fewer format specifiers than there are entities in `str`, `strread` reapplies the format specifiers, starting over at the beginning. See "Example 5" on page 1-10999 below.

The `format` string supports a subset of the conversion specifiers and conventions of the C language `fscanf` routine. White-space characters in the `format` string are ignored.

Preserving White-Space

If you want to preserve leading and trailing spaces in a string, use the `whitespace` parameter as shown here:

```
str = '   An  example      of preserving     spaces      ';

strread(str, '%s', 'whitespace', '')
ans =
    '   An  example      of preserving     spaces      '
```

See Also

`textscan` | `sscanf`

Introduced before R2006a

strrep

Find and replace substring

Syntax

```
newStr = strrep(str,old,new)
```

Description

`newStr = strrep(str,old,new)` replaces all occurrences of `old` in `str` with `new`.

Examples

Replace Text in Character Vector

Create a character vector and replace a substring within it.

```
chr = 'The quick brown fox'
```

```
chr =
'The quick brown fox'
```

```
newChr = strrep(chr,'quick','sly')
```

```
newChr =
'The sly brown fox'
```

Replace Text in String Array

Create a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["the quick brown fox";
       "and the lazy dog"]
```

```
str = 2×1 string array
    "the quick brown fox"
```

```
    "and the lazy dog"
```

Replace a substring in each element of the array.

```
newStr = strrep(str,'the','a')
```

```
newStr = 2×1 string array
    "a quick brown fox"
    "and a lazy dog"
```

Replace Substrings with Multiple Values

Replace placeholder content in a cell array, `'___'`, with different values in a second cell array.

```
C1 = {'Date Received: ___';
      'Date Accepted: ___'};
old = '___';
new = {'2016-09-06';
       '2016-10-11'};
C2 = strrep(C1,old,new)
```

```
C2 = 2×1 cell array
    'Date Received: 2016-09-06'
    'Date Accepted: 2016-10-11'
```

Replace Repeated Pattern

Create a character vector with a repeated, overlapping pattern. Compare the results of using the `strrep`, `replace`, and `regexprep` functions to replace the pattern.

```
repeats = 'abc 2 def 22 ghi 222 jkl 2222'
```

```
repeats =
'abc 2 def 22 ghi 222 jkl 2222'
```

Find the indices of the repeating pattern `'22'` using the `strfind` function. `strfind` finds all instances of the pattern, including instances that overlap.

```
indices = strfind(repeats, '22')
```

```
indices =

    11    18    19    26    27    28
```

Replace `'22'` using `strrep`. When you use `strrep`, it replaces every instance identified by `strfind`.

```
using_strrep = strrep(repeats, '22', '*')
```

```
using_strrep =
'abc 2 def * ghi ** jkl ***'
```

Replace `'22'` using `replace`. It does not replace every instance that `strrep` replaces.

```
using_replace = replace(repeats, '22', '*')
```

```
using_replace =
'abc 2 def * ghi *2 jkl **'
```

Replace `'22'` using `regexprep`. The results are identical to the results using the `replace` function.

```
using_regexprep = regexprep(repeats, '22', '*')
```

```
using_regexprep =
'abc 2 def * ghi *2 jkl **'
```

`strrep` finds all instances of a pattern before replacing any instance. However, the `replace` and `regexprep` functions replace an instance of a pattern as soon as they find it within the text.

- "Create String Arrays"
- "Search and Replace Text"
- "Test for Empty Strings and Missing Values"

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, character vector, or cell array of character vectors.

Data Types: `string` | `char` | `cell`

`old` — Substring to replace
string array | character vector | cell array of character vectors

Substring to replace, specified as a string array, character vector, or cell array of character vectors.

If `old` is a nonscalar string or cell array, then it must be the same size as `str`. Otherwise, it can be a character vector or string scalar.

Data Types: `string` | `char` | `cell`

`new` — New substring
string array | character vector | cell array of character vectors

New substring, specified as a string array, character vector, or cell array of character vectors.

If `new` is a nonscalar string or cell array, then it must be the same size as `str`. Otherwise, it can be a character vector or string scalar.

Data Types: `string` | `char` | `cell`

Algorithms

- The `strrep` function does not find empty character vectors or empty strings for replacement. That is, when `str` and `old` both contain the empty character vector (`''`) or the empty string(`""`), `strrep` does not replace empty character vectors or strings with the contents of `new`.
- Before replacing text, `strrep` finds all instances of `old` in `str`, like the `strfind` function. For overlapping patterns, `strrep` performs multiple replacements.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- The original string must be a tall array of strings or a tall cell array of character vectors.
- The old string and new string inputs can be single strings or tall arrays of strings with the same size.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input text must be specified as a character vector. Cell arrays are not supported.
- Generated code returns an empty output as a 1-by-0 character array.

See Also

See Also

`erase` | `regexp` | `regexprep` | `replace` | `strfind`

Topics

“Create String Arrays”
“Search and Replace Text”
“Test for Empty Strings and Missing Values”

Introduced before R2006a

strsplit

Split string at specified delimiter

Syntax

```
C = strsplit(str)
C = strsplit(str,delimiter)
C = strsplit(str,delimiter,Name,Value)

[C,matches] = strsplit( ___ )
```

Description

`C = strsplit(str)` splits `str` at whitespace into `C`. A whitespace character is equivalent to any sequence in the set `{' ','\f','\n','\r','\t','\v'}`.

`C = strsplit(str,delimiter)` splits `str` at the delimiters specified by `delimiter`.

`C = strsplit(str,delimiter,Name,Value)` specifies additional delimiter options using one or more name-value pair arguments.

`[C,matches] = strsplit( ___ )` additionally returns the array,`matches`. The `matches` output argument contains all occurrences of delimiters upon which `strsplit` splits `str`. You can use this syntax with any of the input arguments of the previous syntaxes.

Examples

Split Character Vector on Whitespace

```
str = 'The rain in Spain.';
C = strsplit(str)
```

```
C = 1×4 cell array
    'The'    'rain'    'in'    'Spain.'
```

C is a cell array containing four character vectors.

Split Character Vector of Values on Specific Delimiter

Split a character vector that contains comma-separated values.

```
data = '1.21, 1.985, 1.955, 2.015, 1.885';
C = strsplit(data,', ')
```

```
C = 1×5 cell array
    '1.21'    '1.985'    '1.955'    '2.015'    '1.885'
```

Split a character vector, `data`, which contains the units `m/s` with an arbitrary number of whitespace on either side of the text. The regular expression, `\s*`, matches any whitespace character appearing zero or more times.

```
data = '1.21m/s1.985m/s 1.955 m/s2.015 m/s 1.885m/s';
[C,matches] = strsplit(data,'\s*m/s\s*',...
    'DelimiterType','RegularExpression')
```

```
C = 1×6 cell array
    '1.21'    '1.985'    '1.955'    '2.015'    '1.885'    ''


matches = 1×5 cell array
    'm/s'    'm/s '    ' m/s'    ' m/s '    'm/s'
```

In this case, the last character vector in C is empty. This empty character vector follows the last matched delimiter.

Split Path on File Separator

```
myPath = 'C:\work\matlab';
C = strsplit(myPath,'\')
```

```
C = 1×3 cell array
    'C:'    'work'    'matlab'
```

Split Character Vector with Multiple Delimiters

Split a character vector on `'  '` and `'ain'`, treating multiple delimiters as one. Specify multiple delimiters in a cell array of character vectors.

```
str = 'The rain in Spain stays mainly in the plain.';
[C,matches] = strsplit(str,{'  ','ain'},'CollapseDelimiters',true)
```

```
C = 1×11 cell array
    'The'    'r'    'in'    'Sp'    'stays'    'm'    'ly'    'in'    'the'    'pl'


matches = 1×10 cell array
    '  '    'ain '    '  '    'ain '    '  '    'ain'    '  '    '  '    '  '    'ain'
```

Split the same character vector on whitespace and on `'ain'`, using regular expressions and treating multiple delimiters separately.

```
[C,matches] = strsplit(str,{'\s','ain'},'CollapseDelimiters',...
    false, 'DelimiterType','RegularExpression')
```

```
C = 1×13 cell array
    'The'    'r'    ''    'in'    'Sp'    ''    'stays'    'm'    'ly'    'in'    'the


matches = 1×12 cell array
    ' '    'ain'    ' '    ' '    'ain'    ' '    ' '    'ain'    ' '    ' '    ' '
```

In this case, `strsplit` treats the two delimiters separately, so empty character vectors appear in output `C` between the consecutively matched delimiters.

Split Text with Multiple, Overlapping Delimiters

Split text on the character vectors `', '` and `', and '`.

```
str = 'bacon, lettuce, and tomato';
[C,matches] = strsplit(str,{', ',', and '})
```

```
C = 1×3 cell array
    'bacon'    'lettuce'    'and tomato'


matches = 1×2 cell array
```

```
    ', '     ', '
```

Because the command lists `', '` first and `', and '` contains `', '`, the `strsplit` function splits `str` on the first delimiter and never proceeds to the second delimiter.

If you reverse the order of delimiters, `', and '` takes priority.

```
str = 'bacon, lettuce, and tomato';
[C,matches] = strsplit(str,{', and ',', '})
```

```
C = 1×3 cell array
    'bacon'    'lettuce'    'tomato'


matches = 1×2 cell array
    ', '     ', and '
```

Input Arguments

`str` — Input text

character vector | string scalar

Input text, specified as a character vector or a string scalar.

Data Types: `char` | `string`

`delimiter` — Delimiting characters

character vector | 1-by-N cell array of character vectors | 1-by-N string array

Delimiting characters, specified as a character vector, a 1-by-N cell array of character vectors, or a 1-by-N string array. Text specified in `delimiter` does not appear in the output `C`.

Specify multiple delimiters in a cell array or a string array. The `strsplit` function splits `str` on the elements of `delimiter`. The order in which delimiters appear in `delimiter` does not matter unless multiple delimiters begin a match at the same character in `str`. In that case `strsplit` splits on the first matching delimiter in `delimiter`.

`delimiter` can include the following escape sequences:

`\\`	Backslash
`\0`	Null
`\a`	Alarm
`\b`	Backspace
`\f`	Form feed
`\n`	New line
`\r`	Carriage return
`\t`	Horizontal tab
`\v`	Vertical tab

Example: `','`

Example: `{'-',','}`

Data Types: `char` | `cell` | `string`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'DelimiterType','RegularExpression'` instructs `strsplit` to treat `delimiter` as a regular expression.

`'CollapseDelimiters'` — Multiple delimiter handling

`1 (true)` (default) | `0 (false)`

Multiple delimiter handling, specified as the comma-separated pair consisting of `'CollapseDelimiters'` and either `true` or `false`. If `true`, then consecutive delimiters in `str` are treated as one. If `false`, then consecutive delimiters are treated as separate delimiters, resulting in empty character vector `''` elements between matched delimiters.

Example: `'CollapseDelimiters',true`

`'DelimiterType'` — Delimiter type

`'Simple'` (default) | `'RegularExpression'`

Delimiter type, specified as the comma-separated pair consisting of `'DelimiterType'` and one of the following character vectors.

`'Simple'`	Except for escape sequences, `strsplit` treats `delimiter` as literal text..
`'RegularExpression'`	`strsplit` treats `delimiter` as a regular expression.

In both cases, `delimiter` can include escape sequences.

Output Arguments

`C` — Parts of original text

cell array of character vectors | string array

Parts of the original character vector, returned as a cell array of character vectors or as a string array. `C` always contains one more element than `matches` contains. Therefore, if `str` begins with a delimiter, then the first element of `C` contains no characters. If `str` ends with a delimiter, then the last cell in `C` contains no characters.

`matches` — Identified delimiters

cell array of character vectors | string array

Identified delimiters, returned as a cell array of character vectors or as a string array. `matches` always contains one fewer element than output `C` contains. If `str` is a character vector or a cell array of character vectors, then `matches` is a cell array. If `str` is a string array, then `matches` is a string array.

Tips

- Starting in R2016b, the `split` function is recommended to split elements of a string array.

See Also

See Also

`regexp` | `split` | `strfind` | `strjoin`

Topics

"Regular Expressions"

Introduced in R2013a

strtok

Selected parts of string

Syntax

```
token = strtok(str)
token = strtok(str,delimiters)
[token,remain] = strtok( ___ )
```

Description

`token = strtok(str)` parses `str` from left to right, using whitespace characters as delimiters, and returns part or all of the text in `token`. First, `strtok` ignores any leading whitespace in `str`. Then, `strtok` starts at the first character that is not whitespace, and includes all characters up to, but not including, the next whitespace character. `strtok` returns that part of the text in `token`. If `strtok` does not find any whitespace to use as a delimiter, then `token` includes all characters up to, and including, the end of `str`.

`token = strtok(str,delimiters)` parses `str` using the characters in `delimiters`. If `delimiters` includes more than one character, then `strtok` treats each character in `delimiters` as a separate delimiter. Because the delimiters are individual characters, `delimiters` can be any size, and the characters within `delimiters` can be in any order.

In this syntax, whitespace characters are not delimiters unless you include them within `delimiters`.

`[token,remain] = strtok( ___ )` returns the remaining text, if any, in `remain`. If `strtok` finds a delimiter, then it is included at the start of `remain`. If `strtok` finds no delimiters in `str`, then it returns the whole of `str`, except for leading delimiters, in `token`, and `remain` has no characters. You can use this syntax with any of the input arguments of the previous syntaxes.

Examples

Return Token from Character Vector

Create a character vector. Return all text up to the first whitespace character that is a delimiter. `strtok` discards leading whitespace characters.

```
chr = '     Four score and seven years ago'
```

```
chr =
'     Four score and seven years ago'
```

```
token = strtok(chr)
```

```
token =
'Four'
```

Return Token Using Delimiter

Create a string. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = "A horse! A horse! My kingdom for a horse!"
```

```
str =
"A horse! A horse! My kingdom for a horse!"
```

Return the first part of the string using the `'!'` character as a delimiter.

```
token = strtok(str,'!')
```

```
token =
"A horse"
```

Return Tokens and Remaining Text

Create a string array. Starting in R2017a, you can create strings using double quotes instead of the `string` function.

```
str = ["all in good time";
       "my dog has fleas";
       "leave no stone unturned"]
```

```
str = 3×1 string array
```

```
    "all in good time"
    "my dog has fleas"
    "leave no stone unturned"
```

Return tokens in a string array, and return the remaining text in a second string array.

```
[token,remain] = strtok(str)
```

```
token = 3×1 string array
    "all"
    "my"
    "leave"


remain = 3×1 string array
    " in good time"
    " dog has fleas"
    " no stone unturned"
```

Parse Delimited Text into String Array

Create a string that contains sample HTML code. Break it down into segments delimited by the < and > characters. Store the segments in a string array.

Starting in R2017a, you can create strings using double quotes instead of the `string` function. To concatenate several strings into one string, use the `plus` operator, `+`.

```
str = "<ul class=continued><li class=continued>" + ...
      "<pre><a name=""13474""></a>token = strtok" + ...
      "(str,delimiter)<a name=""13475""></a>" + ...
      "token = strtok(str)"
```

```
str =
"<ul class=continued><li class=continued><pre><a name="13474"></a>token = strtok(str,de
```

Create an empty string array to contain the code segments.

```
segments = strings(0)
```

```
segments =

  0×0 empty string array
```

Break `str` into segments. Write a `while` loop that repeatedly calls `strtok` on the remaining HTML text. The `while` loop exits when there is no more text to parse.

```
remain = str;
while (remain ~= "")
   [token,remain] = strtok(remain, '<>');
   segments = [segments ; token];
end
```

Display the code segments.

```
segments
```

```
segments = 9×1 string array
    "ul class=continued"
    "li class=continued"
    "pre"
    "a name="13474""
    "/a"
    "token = strtok(str,delimiter)"
    "a name="13475""
    "/a"
    "token = strtok(str)"
```

Input Arguments

`str` — Input text

string array | character vector | cell array of character vectors

Input text, specified as a string array, a character vector, or a cell array of character vectors.

Data Types: `string` | `char` | `cell`

`delimiters` — Delimiting characters

string array | character vector | cell array of character vectors

Delimiting characters, specified as a string array, a character vector, or a cell array of character vectors. Because `strtok` treats individual characters as delimiters, `delimiters` can be any size and can contain characters in any order.

Example: `strtok(str,{'YZ','X'})` treats `'X'`, `'Y'`, and `'Z'` as separate delimiters. It does not treat `'YZ'` as a delimiter.

Data Types: `string` | `char` | `cell`

Output Arguments

`token` — Selected part of text

string array | character vector | cell array of character vectors

Selected part of the text, returned as a string array, a character vector, or a cell array of character vectors. `token` includes all text starting at the first character that is not a delimiter and ending at, but not including, the next delimiter. `str` and `token` are the same data type.

Data Types: `string` | `char` | `cell`

`remain` — Remainder of text

string array | character vector | cell array of character vectors

Remainder of the text, returned as a string array, a character vector, or a cell array of character vectors. If `strtok` finds a delimiter in `str`, then `remain` includes all text starting at, and including, that delimiter and ending at the end of the text. `str` and `remain` are the same data type.

Data Types: `string` | `char` | `cell`

Tips

Do not specify an escape-character sequence as a delimiter. `strtok` does not translate escape character sequences. Instead, you can use the `char` function to specify such characters. For example, to specify a tab as a delimiter use `char(9)` instead of `'\t'`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input text must be specified as a character vector. Cell arrays are not supported.
- Generated code returns an empty output as a 1-by-0 character array.

See Also

See Also

`regexp` | `split` | `splitlines` | `sprintf` | `strcmp` | `strfind` | `strncmp` | `strsplit` | `textscan`

Topics

"Formatting Text"
"Regular Expressions"

Introduced before R2006a

strtrim

Remove leading and trailing whitespace from string array or character array

Syntax

```
newTxt = strtrim(txt)
```

Description

`newTxt = strtrim(txt)` removes leading and trailing whitespace characters from `txt` and returns the result as `newTxt`. However, `strtrim` does not remove significant whitespace characters. For example, `strtrim` removes leading and trailing space and tab characters, but does not remove the nonbreaking space character, `char(160)`.

Examples

Remove Leading Whitespace from Character Vector

Create a character vector with spaces and a tab character as leading whitespace.

```
chr = sprintf('  \t   Remove    leading whitespace')
```

```
chr =
'      Remove    leading whitespace'
```

Remove the leading tab and spaces.

```
newChr = strtrim(chr)
```

```
newChr =
'Remove    leading whitespace'
```

`strtrim` removes the leading whitespace characters, but not the whitespace between other characters.

Remove Leading and Trailing Spaces from String Array

Starting in R2017a, you can create strings using double quotes instead of the `string` function. Create a string array, and remove leading and trailing whitespace with the `strtrim` function.

```
str = ["   Gemini    ","   Apollo    ";
       "   ISS       ","   Skylab    "]
```

```
str = 2×2 string array
    "   Gemini    "    "   Apollo    "
    "   ISS       "    "   Skylab    "
```

```
newStr = strtrim(str)
```

```
newStr = 2×2 string array
    "Gemini"    "Apollo"
    "ISS"       "Skylab"
```

Remove Leading and Trailing Whitespace from Cell Array

Remove the leading and trailing whitespace from all the character vectors in a cell array and display them.

```
chr = {'     Trim leading whitespace';
       'Trim trailing whitespace     '}
```

```
chr = 2×1 cell array
    '     Trim leading whitespace'
    'Trim trailing whitespace     '
```

```
newChr = strtrim(chr)
```

```
newChr = 2×1 cell array
    'Trim leading whitespace'
    'Trim trailing whitespace'
```

Keep Nonbreaking Space Character

Create a character vector that includes the nonbreaking space character, `char(160)`, as a trailing whitespace character.

```
chr = '     Keep nonbreaking space';
chr = [chr char(160) '     '];
```

Display `chr` between `|` symbols to show the leading and trailing whitespace.

```
['|' chr '|']
```

```
ans =
'|     Keep nonbreaking space      |'
```

Remove the leading and trailing whitespace characters.

```
newChr = strtrim(chr);
```

Display `newChr` between `|` symbols. `strtrim` removes the space characters but leaves the nonbreaking space at the end of `newChr`.

```
['|' newChr '|']
```

```
ans =
'|Keep nonbreaking space |'
```

Input Arguments

`txt` — Input text

character array | cell array of character arrays | string array

Input text, specified as a character array or as a cell array of character arrays, or a string array.

Data Types: `char` | `cell` | `string`

Algorithms

`strtrim` does not remove significant whitespace characters.

This table shows the most common characters that are significant whitespace characters and their descriptions. For more information, see Whitespace character.

Significant Whitespace Character	Description
`char(133)`	Next line

Significant Whitespace Character	Description
`char(160)`	Nonbreaking space
`char(8199)`	Figure space
`char(8239)`	Narrow no-break space

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input text must be specified as a character array. Cell arrays are not supported.
- Input values must be in the range 0-127.
- Generated code returns an empty output as a 1-by-0 character array.

See Also

See Also

`cellstr` | `deblank` | `isspace` | `strjust`

Introduced before R2006a

struct

Create structure array

Syntax

```
s = struct
s = struct(field,value)
s = struct(field1,value1,...,fieldN,valueN)
s = struct([])
```

```
s = struct(obj)
```

Description

`s = struct` creates a scalar (1-by-1) structure with no fields.

`s = struct(field,value)` creates a structure array with the specified field and values. The `value` input argument can be any data type, such as a numeric, logical, character, or cell array.

- If `value` is *not* a cell array, then `s` is a scalar structure, where `s.(field) = value`.
- If `value` is a cell array, then `s` is a structure array with the same dimensions as `value`. Each element of `s` contains the corresponding element of `value`. For example, `s = struct('f',{'a','b'})` returns `s(1).f = 'a'` and `s(2).f = 'b'`.
- If `value` is an empty cell array `{}`, then `s` is an empty (0-by-0) structure.

`s = struct(field1,value1,...,fieldN,valueN)` creates a structure array with multiple fields. Any nonscalar cell arrays in the set `value1,...,valueN` must have the same dimensions.

- If none of the `value` inputs is a cell array, or if all `value` inputs that are cell arrays are scalars, then `s` is a scalar structure.
- If any of the `value` inputs is a nonscalar cell array, then `s` has the same dimensions as the nonscalar cell array. For any `value` that is a scalar cell array or an array of any other data type, `struct` inserts the contents of `value` in the relevant field for all elements of `s`.

- If any `value` input is an empty cell array, `{}`, then output `s` is an empty (0-by-0) structure. To specify an empty field and keep the values of the other fields, use `[]` as a `value` input instead.

`s = struct([])` creates an empty (0-by-0) structure with no fields.

`s = struct(obj)` creates a scalar structure with field names and values that correspond to properties of `obj`. The `struct` function does not convert `obj`, but rather creates `s` as a new structure. This structure does not retain the class information, so private, protected, and hidden properties become public fields in `s`. The `struct` function issues a warning when you use this syntax.

Examples

Structure with One Field

Create a nonscalar structure with one field.

```
field = 'f';
value = {'some text';
         [10, 20, 30];
         magic(5)};
s = struct(field,value)
```

```
s = 3×1 struct array with fields:
    f
```

View the contents of each element.

```
s.f
```

```
ans =
'some text'

ans =

    10    20    30


ans =

    17    24     1     8    15
```

```
    23     5     7    14    16
     4     6    13    20    22
    10    12    19    21     3
    11    18    25     2     9
```

When you access a field of a nonscalar structure, such as `s.f`, MATLAB® returns a comma-separated list. In this case, `s.f` is equivalent to `s(1).f, s(2).f, s(3).f`.

Structure with Multiple Fields

Create a nonscalar structure with several fields.

```
field1 = 'f1';  value1 = zeros(1,10);
field2 = 'f2';  value2 = {'a', 'b'};
field3 = 'f3';  value3 = {pi, pi.^2};
field4 = 'f4';  value4 = {'fourth'};

s = struct(field1,value1,field2,value2,field3,value3,field4,value4)
```

```
s = 1×2 struct array with fields:
    f1
    f2
    f3
    f4
```

The cell arrays for `value2` and `value3` are 1-by-2, so `s` is also 1-by-2. Because `value1` is a numeric array and not a cell array, both `s(1).f1` and `s(2).f1` have the same contents. Similarly, because the cell array for `value4` has a single element, `s(1).f4` and `s(2).f4` have the same contents.

```
s(1)
```

```
ans = struct with fields:
    f1: [0 0 0 0 0 0 0 0 0 0]
    f2: 'a'
    f3: 3.1416
    f4: 'fourth'
```

```
s(2)
```

```
ans = struct with fields:
```

```
    f1: [0 0 0 0 0 0 0 0 0 0]
    f2: 'b'
    f3: 9.8696
    f4: 'fourth'
```

Structure with Empty Field

Create a structure with an empty field. Use `[]` to specify the value of the empty field.

```
s = struct('f1','a','f2',[])
```

```
s = struct with fields:
    f1: 'a'
    f2: []
```

Fields That Contain Cell Arrays

Create a structure with a field that contains a cell array.

```
field = 'mycell';
value = {{'a','b','c'}};
s = struct(field,value)
```

```
s = struct with fields:
    mycell: {'a'  'b'  'c'}
```

Empty Structure

Create an empty structure with several fields.

```
s = struct('a',{},'b',{},'c',{})
```

```
s =

  0×0 empty struct array with fields:

    a
    b
    c
```

Assign a value to a field in an empty structure.

```
s(1).a = 'a'
```

```
s = struct with fields:
    a: 'a'
    b: []
    c: []
```

Nested Structure

Create a nested structure. `a` is a structure with a field which contains another structure.

```
a.b = struct('c',{},'d',{})
```

```
a = struct with fields:
    b: [0×0 struct]
```

View the names of the fields of `a.b`.

```
fieldnames(a.b)
```

```
ans = 2×1 cell array
    'c'
    'd'
```

- "Access Data in a Structure Array"
- "Generate Field Names from Variables"

Input Arguments

`field` — Field name

character vector

Field name, specified as a character vector. Valid field names begin with a letter, and can contain letters, digits, and underscores. The maximum length of a field name is the value that the `namelengthmax` function returns.

`value` — Values within structure field
cell array | scalar | vector | multidimensional array

Values within a structure field, specified as a cell array or as a scalar, vector, or multidimensional array of any other data type.

If none of the `value` inputs is a cell array, or if all `value` inputs that are cell arrays are scalars, then output `s` is a scalar structure. Otherwise, `value` inputs that are nonscalar cell arrays must have the same dimensions, and output `s` also has those dimensions. For any `value` that is a scalar cell array or an array of any other data type, `struct` inserts the contents of `value` in the relevant field for all elements of `s`.

If any `value` input is an empty cell array, `{}`, then output `s` is an empty structure array. To specify an empty field and keep the values of the other fields, use `[]` as a `value` input instead.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `struct` | `table` | `cell` | `function_handle` | `categorical` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

`obj` — Object
object of any nonfundamental class

Object. `struct` copies the properties of `obj` to the fields of a new scalar structure. `obj` cannot be an object of a fundamental data type, such as `double` or `char`. See "Fundamental MATLAB Classes" for the list of fundamental data types.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- You cannot create a structure that contains a cell array. For example, you cannot generate code for:

  ```
  s = struct('a',{{1 2}})
  ```

- If the `value` argument is a cell array, all elements must have the same type.

See Also

See Also

`cell2struct` | `fieldnames` | `isfield` | `isstruct` | `orderfields` | `rmfield` | `struct2cell` | `struct2table` | `substruct` | `table` | `table2struct`

Topics

"Access Data in a Structure Array"
"Generate Field Names from Variables"

Introduced before R2006a

struct2cell

Convert structure to cell array

Syntax

```
c = struct2cell(s)
```

Description

`c = struct2cell(s)` converts the `m`-by-`n` structure `s` (with `p` fields) into a `p`-by-`m`-by-`n` cell array `c`.

If structure `s` is multidimensional, cell array `c` has size `[p size(s)]`.

Examples

The commands

```
clear s, s.category = 'tree';
s.height = 37.4; s.name = 'birch';
```

create the structure

```
s =
    category: 'tree'
      height: 37.4000
        name: 'birch'
```

Converting the structure to a cell array,

```
c = struct2cell(s)

c =
    'tree'
    [37.4000]
    'birch'
```

Tips

- Use `fieldnames` to obtain structure field names in the same order as `struct2cell` returns structure values.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- For a variable-size structure array, the resulting cell array must be homogeneous. If `s` is a variable-size structure array, the fields must have the same type.
- If `struct2cell` cannot convert `s` to a homogeneous cell array, the output cell array is heterogeneous. A heterogeneous output cell array can have a maximum of 1024 elements.

See Also

`cell2struct` | `struct2table` | `table2cell` | `cell` | `iscell` | `struct` | `isstruct` | `fieldnames`

Topics

dynamic field names

Introduced before R2006a

struct2table

Convert structure array to table

Syntax

```
T = struct2table(S)
T = struct2table(S,Name,Value)
```

Description

`T = struct2table(S)` converts the structure array, `S`, to a table, `T`. Each field of `S` becomes a variable in `T`.

`T = struct2table(S,Name,Value)` creates a table from a structure array, `S`, with additional options specified by one or more `Name,Value` pair arguments.

For example, you can specify row names to include in the table.

Examples

Convert Scalar Structure to Table

Convert a scalar structure to a table using the default options.

Create a structure array, `S`.

```
S.Name = {'CLARK';'BROWN';'MARTIN'};
S.Gender = {'M';'F';'M'};
S.SystolicBP = [124;122;130];
S.DiastolicBP = [93;80;92];
```

```
S
```

```
S = struct with fields:
           Name: {3×1 cell}
         Gender: {3×1 cell}
     SystolicBP: [3×1 double]
    DiastolicBP: [3×1 double]
```

The scalar structure, S, has four fields, each with three rows.

Convert the structure array to a table.

```
T = struct2table(S)
```

```
T = 3×4 table
      Name       Gender    SystolicBP    DiastolicBP
    ________     ______    __________    ___________

    'CLARK'      'M'       124           93
    'BROWN'      'F'       122           80
    'MARTIN'     'M'       130           92
```

The structure field names in S become the variable names in the output table. The size of T is 3-by-4.

Change Name from a variable to row names by modifying the table property, T.Properties.RowNames, and then deleting the variable Name.

```
T.Properties.RowNames = T.Name;
T.Name = [];
```

```
T
```

```
T = 3×3 table
               Gender    SystolicBP    DiastolicBP
               ______    __________    ___________

    CLARK      'M'       124           93
    BROWN      'F'       122           80
    MARTIN     'M'       130           92
```

Convert Nonscalar Structure Array to Table

Create a nonscalar structure array, S.

```
S(1,1).Name = 'CLARK';
S(1,1).Gender = 'M';
S(1,1).SystolicBP = 124;
S(1,1).DiastolicBP = 93;

S(2,1).Name = 'BROWN';
```

```
S(2,1).Gender = 'F';
S(2,1).SystolicBP = 122;
S(2,1).DiastolicBP = 80;

S(3,1).Name = 'MARTIN';
S(3,1).Gender = 'M';
S(3,1).SystolicBP = 130;
S(3,1).DiastolicBP = 92;

S
```

```
S = 3×1 struct array with fields:
    Name
    Gender
    SystolicBP
    DiastolicBP
```

S is a 3-by-1 structure array with four fields.

Convert the structure array to a table.

```
T = struct2table(S)
```

```
T = 3×4 table
      Name       Gender    SystolicBP    DiastolicBP
    ________     ______    __________    ___________

    'CLARK'      'M'       124           93
    'BROWN'      'F'       122           80
    'MARTIN'     'M'       130           92
```

The structure field names in S become the variable names in the output table. The size of T is 3-by-4.

Treat Scalar Stucture As Array

Use `'AsArray',true` to create a table from a scalar structure whose fields have different numbers of rows.

Create a scalar structure, S, with fields `name`, `billing`, and `test`.

```
S.name = 'John Doe';
S.billing = 127.00;
```

```
S.test = [79, 75, 73; 180, 178, 177.5; 220, 210, 205];
S
```

```
S = struct with fields:
       name: 'John Doe'
    billing: 127
       test: [3×3 double]
```

The fields have a different number of rows. Therefore, you cannot use `struct2table(S)`, which uses `'AsArray',false` by default.

Treat the scalar structure as an array and convert it to a table.

```
T = struct2table(S,'AsArray',true)
```

```
T = 1×3 table
       name       billing        test
    __________    _______    ____________

    'John Doe'    127        [3×3 double]
```

`T` contains one row.

- "Access Data in a Table"

Input Arguments

S — Structure array

structure array

Structure array, specified as a scalar structure array.

- If `S` is a scalar structure with `n` fields, all of which have `m` rows, then `T` is an `m`-by-`n` table.
- If `S` is a nonscalar `m`-by-`1` structure array with `n` fields, then `T` is an `m`-by-`n` table.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `RowNames',{'row1','row2','row3'}` uses the row names, `row1`, `row2`, and `row3` for the table, `T`.

`'RowNames'` — Row names for `T`
`{}` (default) | cell array of character vectors

Row names for `T`, specified as the comma-separated pair consisting of `'RowNames'` and a cell array of character vectors that are nonempty and distinct.

`'AsArray'` — Indicator for how to treat scalar structure
`false` (default) | `true` | `0` | `1`

Indicator for how to treat scalar structure, specified as the comma-separated pair consisting of `'AsArray'` and either `false`, `true`, `0`, or `1`.

`true`	`struct2table` converts `S` to a table with one row and `n` variables. The variables can be different sizes.
`false`	`struct2table` converts a scalar structure array with `n` fields into an `m`-by-`n` table. Each field must have `m` rows. This is the default behavior

Output Arguments

`T` — Output table
table

Output table, returned as a table. The table can store metadata such as descriptions, variable units, variable names, and row names. For more information, see Table Properties.

See Also

See Also
`array2table` | `cell2table` | `table` | `table2struct`

Topics

"Access Data in a Table"

Introduced in R2013b

structfun

Apply function to each field of scalar structure

Syntax

```
[A1,...,An] = structfun(func,S)
[A1,...,An] = structfun(func,S,Name,Value)
```

Description

`[A1,...,An] = structfun(func,S)` applies the function specified by function handle `func` to each field of scalar structure `S`. Output arrays `A1,...,An`, where `n` is the number of outputs from function `func`, contain the outputs from the function calls.

`[A1,...,An] = structfun(func,S,Name,Value)` calls function `func` with additional options specified by one or more `Name,Value` pair arguments. Possible values for `Name` are `'UniformOutput'` or `'ErrorHandler'`.

Input Arguments

func

Handle to a function that accepts a single input argument and returns `n` output arguments.

If function `func` corresponds to more than one function file (that is, if `func` represents a set of overloaded functions), MATLAB determines which function to call based on the class of the input arguments.

S

Scalar structure.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'UniformOutput'`

Logical value, as follows:

`true (1)`	Indicates that for all inputs, each output from function `func` is a scalar cell array, scalar structure, or scalar value that is always of the same type and size. The `structfun` function combines the outputs in arrays `A1,...,An`, where `n` is the number of function outputs. Each output array is of the same type as the individual function outputs.
`false (0)`	Requests that the `structfun` function combine the outputs into scalar structures `A1,...,An`, with the same fields as input structure `S`. The outputs of function `func` can be of any size or type.

Default: `true`

`'ErrorHandler'`

Handle to a function that catches any errors that occur when MATLAB attempts to execute function `func`. Define this function so that it rethrows the error or returns valid outputs for function `func`.

MATLAB calls the specified error-handling function with two input arguments:

- A structure with these fields:

`identifier`	Error identifier.
`message`	Error message text.
`index`	Linear index corresponding to the element of the input cell array at the time of the error.

- The set of input arguments to function `func` at the time of the error.

Output Arguments

`A1,...,An`

Arrays that collect the `n` outputs from function `func`.

If `UniformOutput` is `true` (the default):

- The individual outputs from function `func` must be scalar values (numeric, logical, or character), scalar structures, or scalar cell arrays.
- The class of a particular output argument must be the same for each input. The class of the corresponding output array is the same as the class of the individual outputs from function `func`.
- Each array `A` is a column vector whose length equals the number of fields in `S`. The `structfun` function applies function `func` to the fields of `S` in the same order as that returned by the `fieldnames` function.

If `UniformOutput` is `false`, each array `A` is a scalar structure with the same fields as input `S`.

Examples

Create a scalar structure, and count the number of characters in each field.

```
s.f1 = 'Sunday';
s.f2 = 'Monday';
s.f3 = 'Tuesday';
s.f4 = 'Wednesday';
s.f5 = 'Thursday';
s.f6 = 'Friday';
s.f7 = 'Saturday';

lengths = structfun(@numel, s)
```

Shorten the text in each field of `s`, created in the previous example. Because the output is nonscalar, set `UniformOutput` to `false`.

```
shortNames = structfun(@(x) ( x(1:3) ), s, 'UniformOutput', false)
```

The syntax `@(x)` creates an anonymous function.

Define and call a custom error handling function.

```
function result = errorfun(errorinfo, field)
   warning(errorinfo.identifier, errorinfo.message);
   result = NaN;
end
```

```
mystruct.f1 = 'text';
myresult = structfun(@(x) x^2, mystruct, 'ErrorHandler', @errorfun)
```

Tutorials

- "Anonymous Functions"
- "Create Function Handle"

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The `ErrorHandler` option is not supported.
- The number of outputs must be less than or equal to three.

See Also

`cellfun` | `arrayfun` | `cell2mat` | `spfun` | `splitapply`

Topics

"Anonymous Functions"
"Create Function Handle"

Introduced before R2006a

strvcat

Concatenate strings vertically

Note: `strvcat` is not recommended. Use `char` instead. Unlike `strvcat`, the `char` function does not ignore empty strings.

Syntax

```
S = strvcat(t1, t2, t3, ...)
S = strvcat(c)
```

Description

`S = strvcat(t1, t2, t3, ...)` forms the character array `S` containing the text strings (or string matrices) `t1,t2,t3,...` as rows. Spaces are appended to each string as necessary to form a valid matrix. Empty arguments are ignored.

`S = strvcat(c)` when `c` is a cell array of strings, passes each element of `c` as an input to `strvcat`. Empty strings in the input are ignored.

Examples

The command `strvcat('Hello','Yes')` is the same as `['Hello';'Yes ']`, except that `strvcat` performs the padding automatically.

```
t1 = 'first'; t2 = 'string'; t3 = 'matrix'; t4 = 'second';

S1 = strvcat(t1, t2, t3)        S2 = strvcat(t4, t2, t3)

S1 =                            S2 =

first                           second
string                          string
```

```
matrix                          matrix

S3 = strvcat(S1, S2)

S3 =
first
string
matrix
second
string
matrix
```

Tips

If each text parameter, `ti`, is itself a character array, `strvcat` appends them vertically to create arbitrarily large string matrices.

See Also

`strcat` | `cat` | `vertcat` | `horzcat` | `int2str` | `mat2str` | `num2str` | `strings`

Introduced before R2006a

sub2ind

Convert subscripts to linear indices

Syntax

```
linearInd = sub2ind(matrixSize, rowSub, colSub)
linearInd = sub2ind(arraySize, dim1Sub, dim2Sub, dim3Sub, ...)
```

Description

`linearInd = sub2ind(matrixSize, rowSub, colSub)` returns the linear index equivalents to the row and column subscripts *rowSub* and *colSub* for a matrix of size *matrixSize*. The *matrixSize* input is a 2-element vector that specifies the number of rows and columns in the matrix as [`nRows`, `nCols`]. The *rowSub* and *colSub* inputs are positive, whole number scalars or vectors that specify one or more row-column subscript pairs for the matrix.

`linearInd = sub2ind(arraySize, dim1Sub, dim2Sub, dim3Sub, ...)` returns the linear index equivalents to the specified subscripts for each dimension of an N-dimensional array of size *arraySize*. The *arraySize* input is an n-element vector that specifies the number of dimensions in the array. The *dimNSub* inputs are positive, whole number scalars or vectors that specify one or more row-column subscripts for the matrix.

All subscript inputs can be `single`, `double`, or any integer type. The *linearInd* output is always of class `double`.

If needed, `sub2ind` assumes that unspecified trailing subscripts are 1.

Examples

Linear Index of 3-D Array

Convert an index of a 3-D array to a single linear index.

Create an array `A`, and find the linear index corresponding to the element in the (2,1,2) position.

```
A = rand(3,4,2);
linearInd = sub2ind(size(A),2,1,2)
```

```
linearInd = 14
```

Check that both index versions refer to the same element of A.

```
A(2,1,2)
```

```
ans = 0.4854
```

```
A(14)
```

```
ans = 0.4854
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- The first argument must be a valid size vector. Code generation does not support size vectors for arrays with more than `intmax` elements.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

`ind2sub` | `find` | `size`

Introduced before R2006a

subplot

Create axes in tiled positions

Syntax

```
subplot(m,n,p)
subplot(m,n,p,'replace')
subplot(m,n,p,'align')
subplot(m,n,p,ax)

subplot('Position',pos)

subplot( ___ ,Name,Value)
ax = subplot( ___ )

subplot(ax)
```

Description

`subplot(m,n,p)` divides the current figure into an `m`-by-`n` grid and creates axes in the position specified by `p`. MATLAB numbers subplot positions by row. The first subplot is the first column of the first row, the second subplot is the second column of the first row, and so on. If axes exist in the specified position, then this command makes the axes the current axes.

`subplot(m,n,p,'replace')` deletes existing axes in position `p` and creates new axes.

`subplot(m,n,p,'align')` creates new axes so that the plot boxes are aligned. This option is the default behavior.

`subplot(m,n,p,ax)` converts the existing axes, `ax`, into a subplot in the same figure.

`subplot('Position',pos)` creates axes in the custom position specified by `pos`. Use this option to position a subplot that does not align with grid positions. Specify `pos` as a four-element vector of the form `[left bottom width height]`. If the new axes overlap existing axes, then the new axes replace the existing axes.

`subplot( ___ ,Name,Value)` modifies axes properties using one or more name-value pair arguments. For a list of properties, see Axes Properties. Set axes properties after all other input arguments.

`ax = subplot( ___ )` returns the `Axes` object created. Use `ax` to make future modifications to the axes. For a list of properties, see Axes Properties.

`subplot(ax)` makes the axes specified by `ax` the current axes for the parent figure. This option does not make the parent figure the current figure if it is not already the current figure.

Examples

Upper and Lower Subplots

Create a figure with two stacked subplots. Plot a sine wave in each one.

```
subplot(2,1,1);
x = linspace(0,10);
y1 = sin(x);
plot(x,y1)

subplot(2,1,2);
y2 = sin(5*x);
plot(x,y2)
```

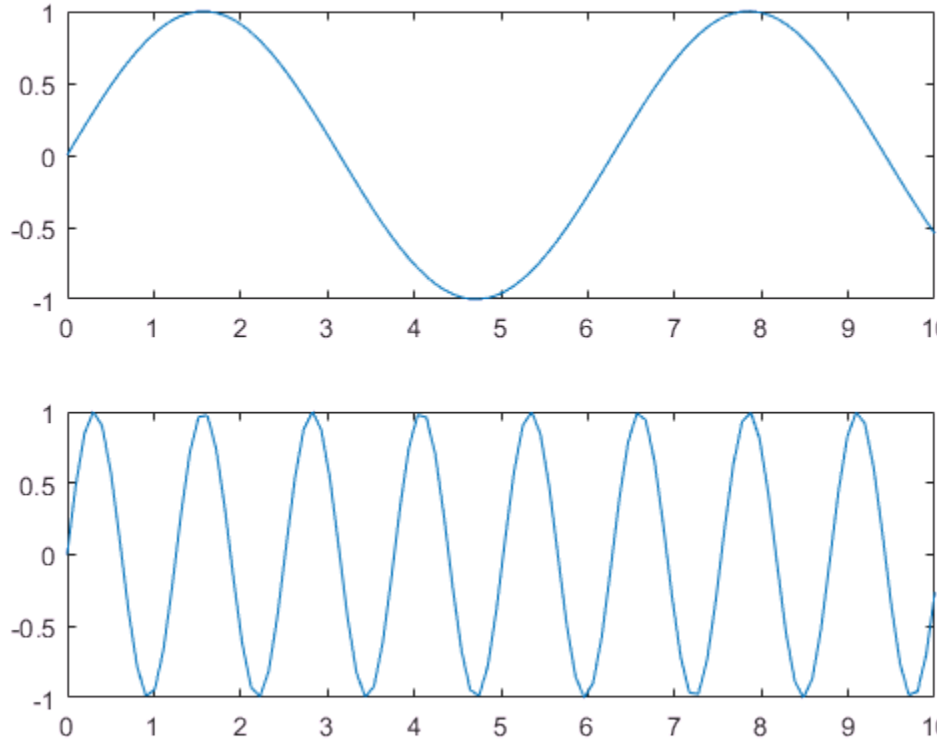

Quadrant of Subplots

Create a figure divided into four subplots. Plot a sine wave in each one and title each subplot.

```
subplot(2,2,1)
x = linspace(0,10);
y1 = sin(x);
plot(x,y1)
title('Subplot 1: sin(x)')

subplot(2,2,2)
y2 = sin(2*x);
```

```
plot(x,y2)
title('Subplot 2: sin(2x)')

subplot(2,2,3)
y3 = sin(4*x);
plot(x,y3)
title('Subplot 3: sin(4x)')

subplot(2,2,4)
y4 = sin(8*x);
plot(x,y4)
title('Subplot 4: sin(8x)')
```

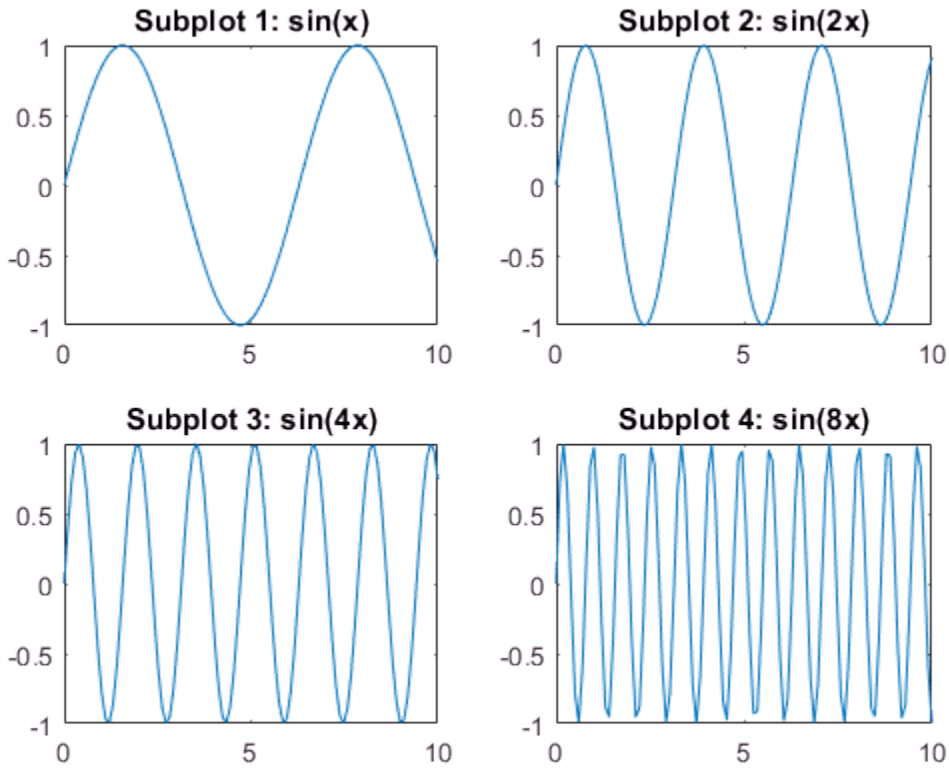

Subplots with Different Sizes

Create a figure containing with three subplots. Create two subplots across the upper half of the figure and a third subplot that spans the lower half of the figure. Add titles to each subplot.

```
subplot(2,2,1);
x = linspace(-3.8,3.8);
y_cos = cos(x);
plot(x,y_cos);
title('Subplot 1: Cosine')

subplot(2,2,2);
y_poly = 1 - x.^2./2 + x.^4./24;
plot(x,y_poly,'g');
title('Subplot 2: Polynomial')

subplot(2,2,[3,4]);
plot(x,y_cos,'b',x,y_poly,'g');
title('Subplot 3 and 4: Both')
```

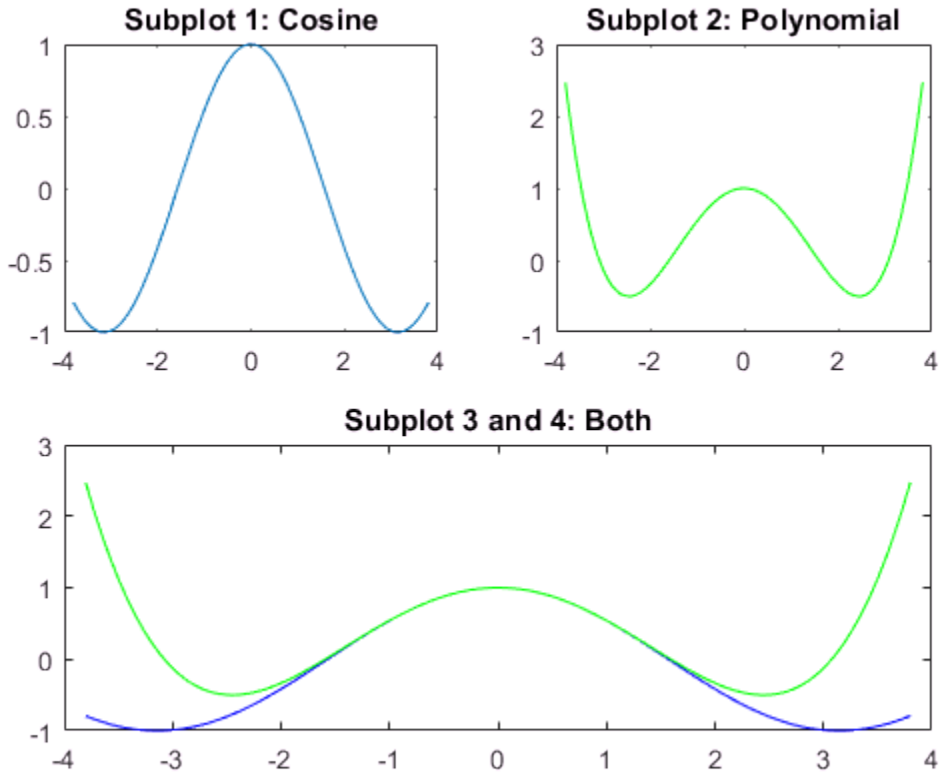

Replace Subplot with Empty Axes

Create a figure with four stem plots of random data. Then replace the second subplot with empty axes.

```
for k = 1:4
    data = rand(1,10);
    subplot(2,2,k)
    stem(data)
end
```

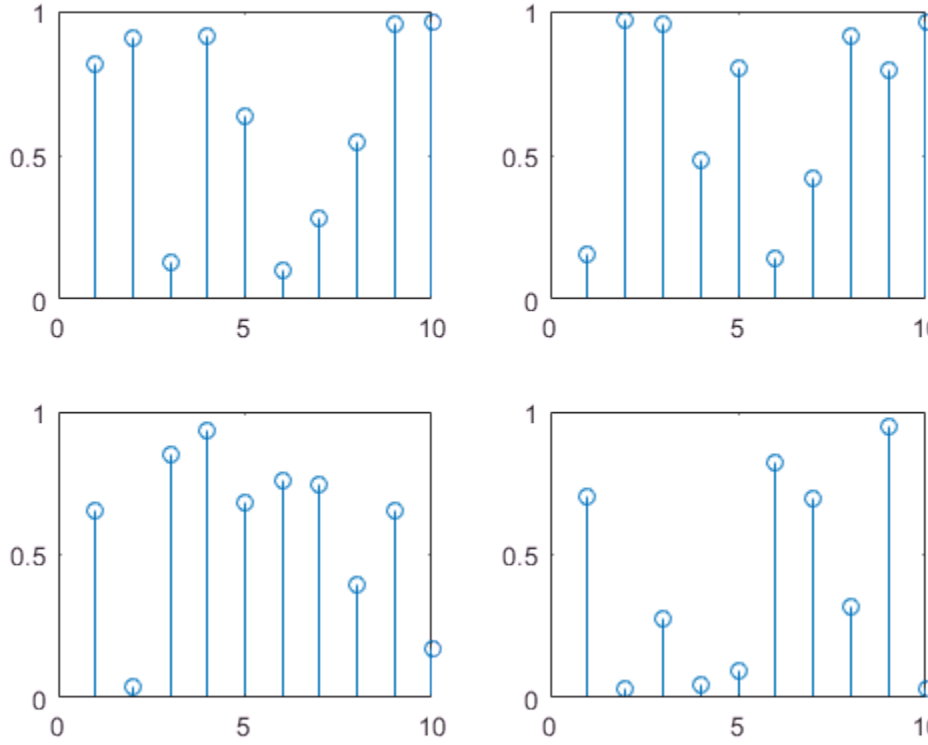


```
subplot(2,2,2,'replace')
```

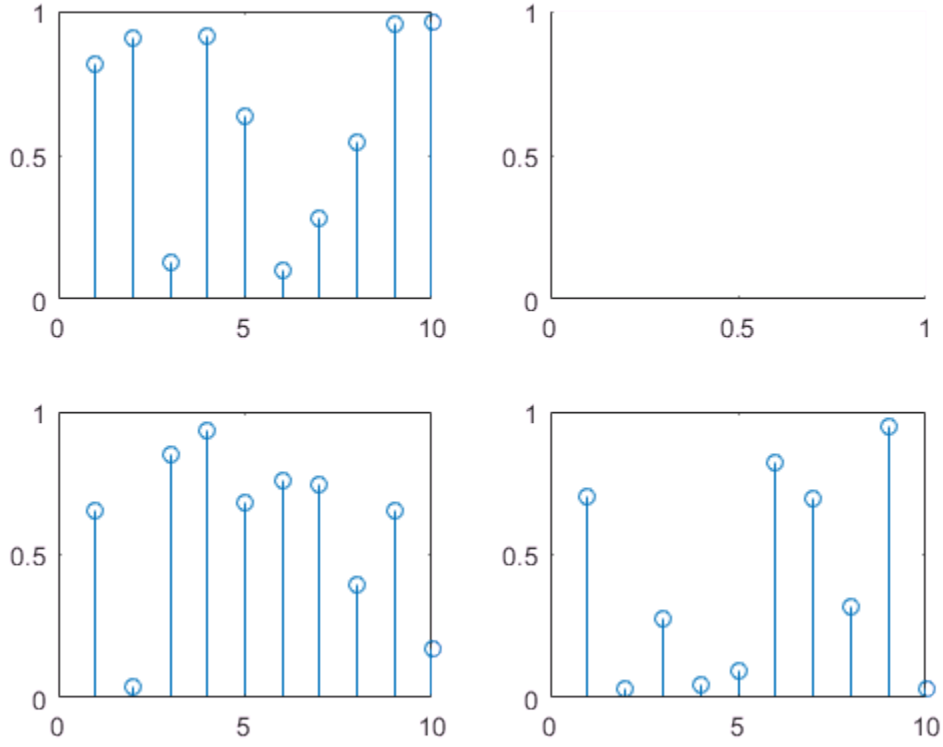

Subplots at Custom Positions

Create a figure with two subplots that are not aligned with grid positions. Specify a custom position for each subplot.

```
pos1 = [0.1 0.3 0.3 0.3];
subplot('Position',pos1)
y = magic(4);
plot(y)
title('First Subplot')

pos2 = [0.5 0.15 0.4 0.7];
subplot('Position',pos2)
```

```
bar(y)
title('Second Subplot')
```

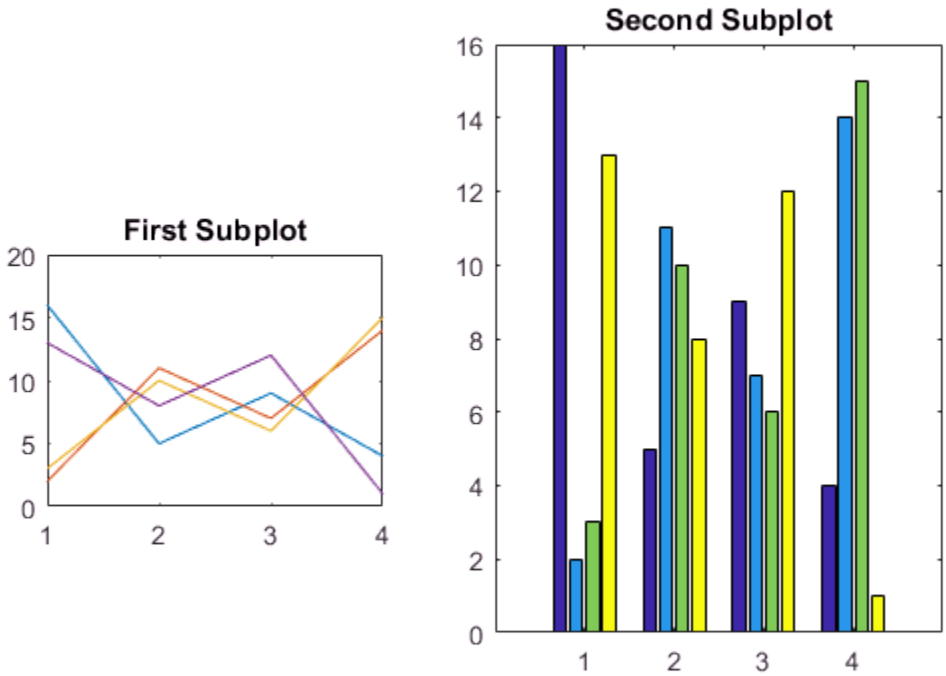

Create Subplots with Polar Axes

Create a figure with two polar axes. Create a polar line chart in the upper subplot and a polar scatter chart in the lower subplot.

```
figure
ax1 = subplot(2,1,1,polaraxes);
theta = linspace(0,2*pi,50);
rho = sin(theta).*cos(theta);
polarplot(ax1,theta,rho)
```

```
ax2 = subplot(2,1,2,polaraxes);
polarscatter(ax2,theta,rho)
```

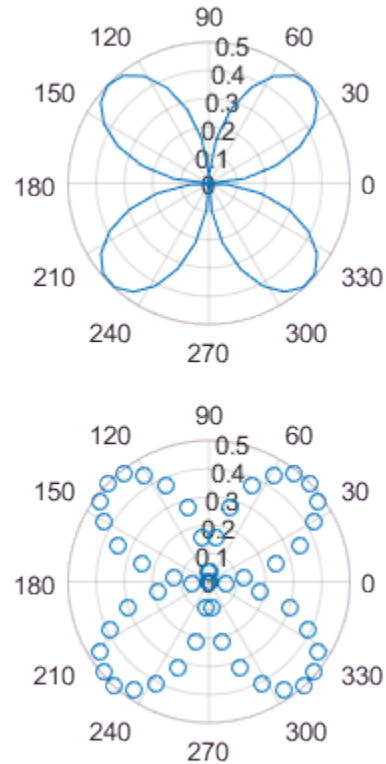

Modify Axes Properties After Creation

Create a figure with two subplots. Assign the `Axes` objects to the variables `ax1` and `ax2`. Specify the `Axes` objects as inputs to the plotting functions to ensure that the functions plot into a specific subplot.

```
ax1 = subplot(2,1,1);
Z = peaks;
plot(ax1,Z(1:20,:))
```

```
ax2 = subplot(2,1,2);
plot(ax2,Z)
```

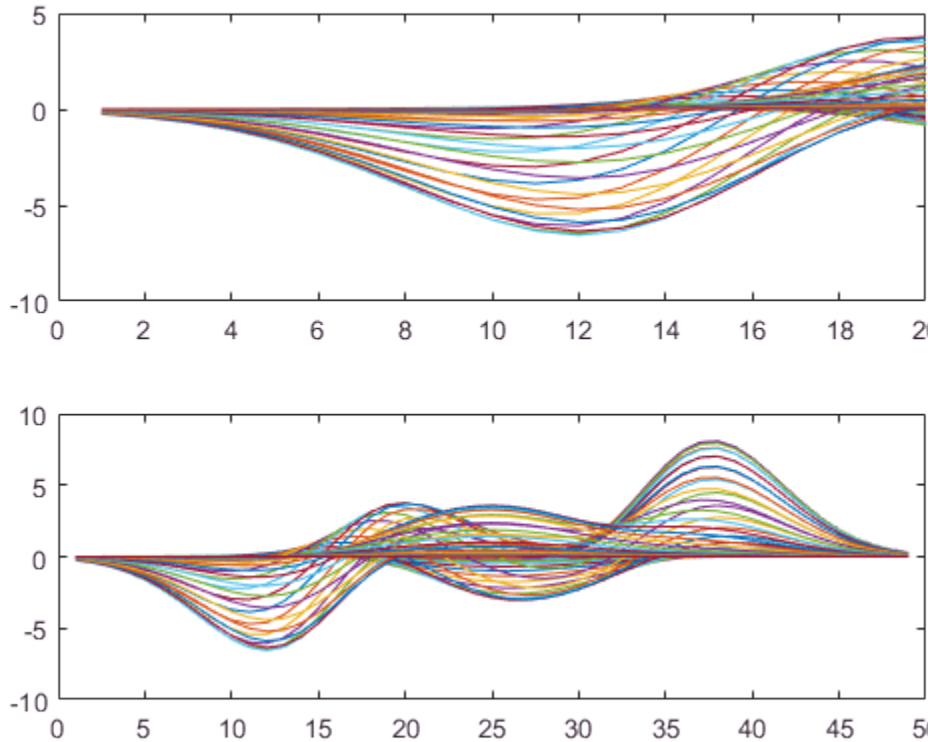

Modify the axes by setting properties of the `Axes` objects. Change the font size for the upper subplot and the line width for the lower subplot. Some plotting functions set axes properties. Execute plotting functions before specifying axes properties to avoid overriding existing axes property settings.

Note: Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
ax1.FontSize = 15;
ax2.LineWidth = 2;
```

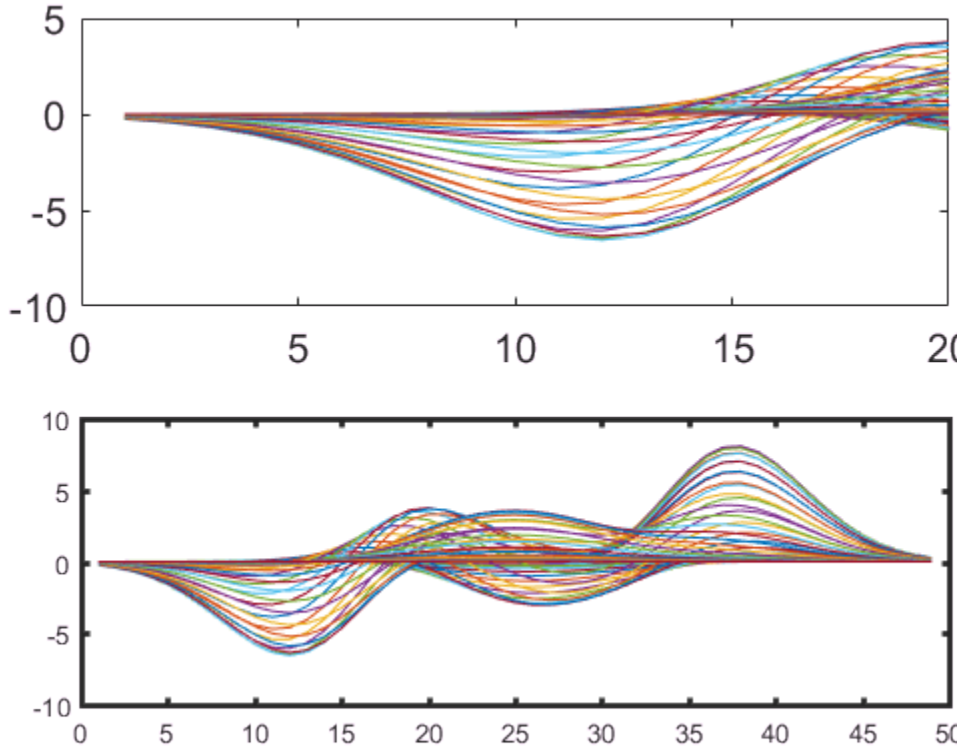

Make Subplot the Current Axes

Create a figure with multiple subplots. Store the `Axes` objects in vector `ax`. Then make the second subplot the current axes. Create a line chart and change the axis limits for the second subplot. By default, graphics functions target the current axes.

```
for k = 1:4
    ax(k) = subplot(2,2,k);
end

subplot(ax(2))
x = linspace(1,50);
y = sin(x);
```

```
plot(x,y,'Color',[0.1, 0.5, 0.1])
title('Second Subplot')
axis([0 50 -1 1])
```

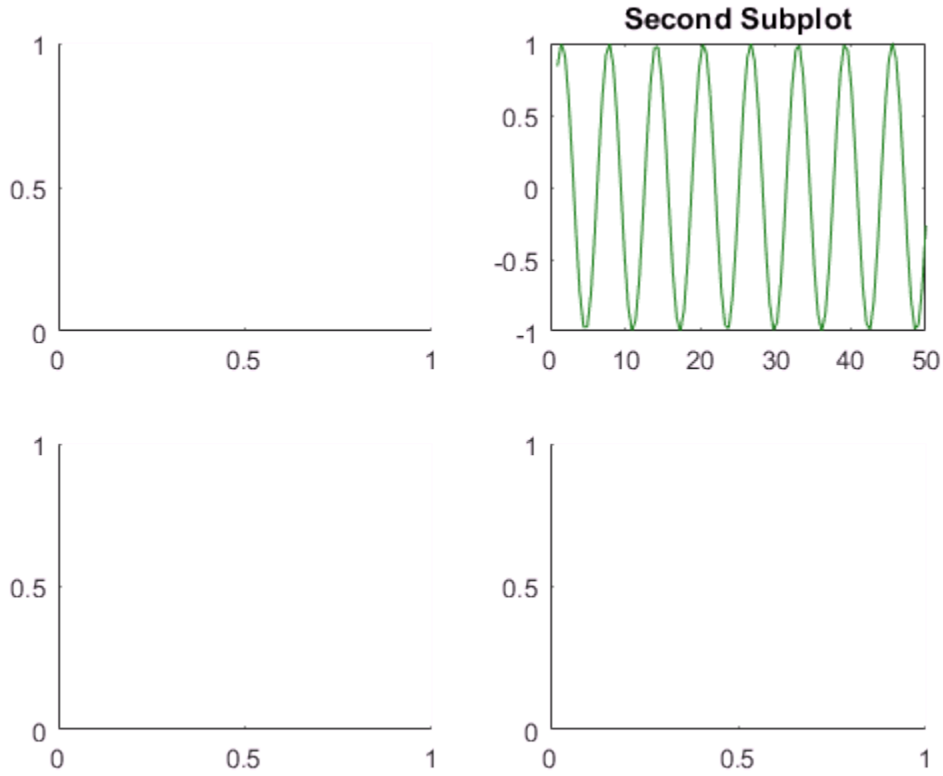

Convert Existing Axes to Subplot

Create a line chart. Then convert the axes so that it is the lower subplot of the figure. The subplot function uses the figure in which the original axes existed.

```
x = linspace(1,10);
y = sin(x);
plot(x,y)
title('Sine Plot')
```

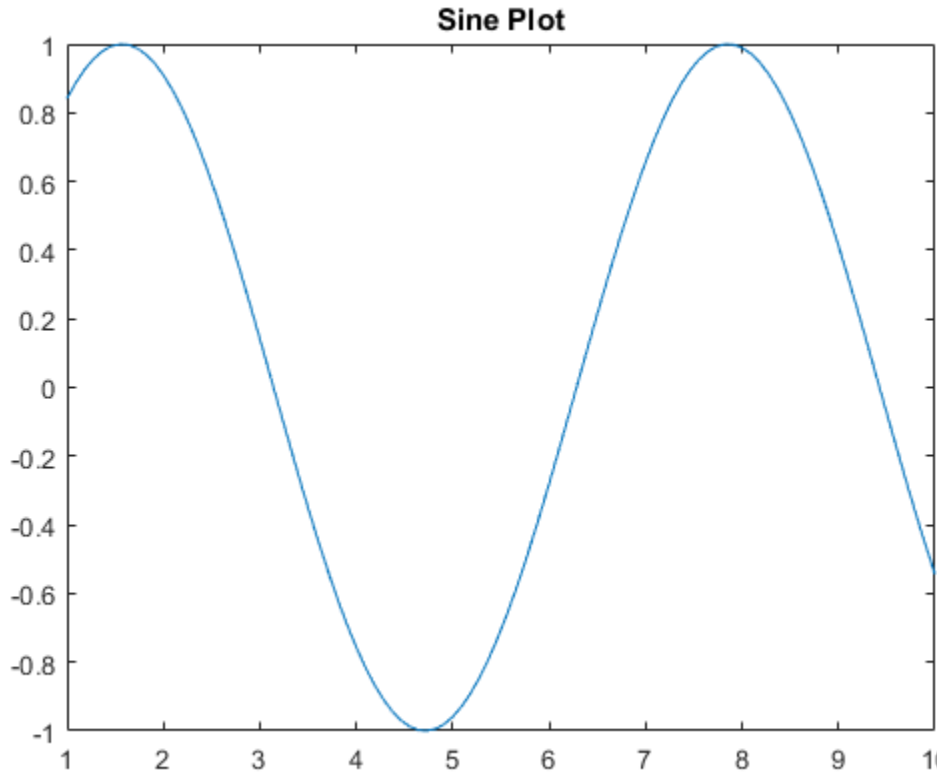


```
ax = gca;
subplot(2,1,2,ax)
```

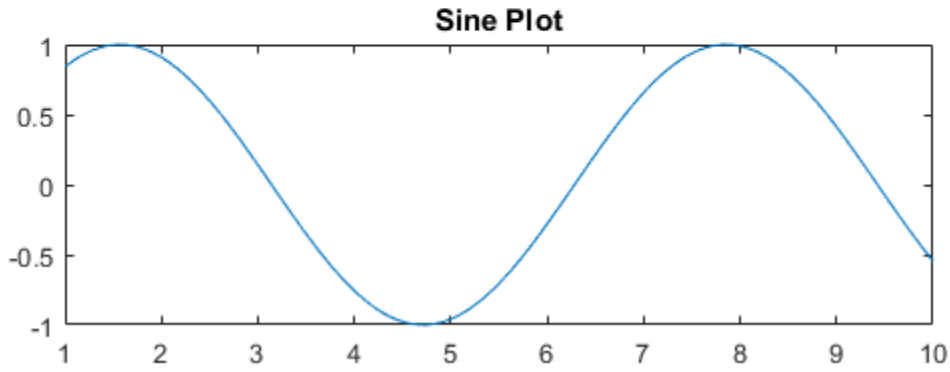

Convert Axes in Separate Figures to Subplots

Combine axes that exist in separate figures in a single figure with subplots.

Create two plots in two different figures. Assign the `Axes` objects to the variables `ax1` and `ax2`. Assign the `Legend` object to the variable `lgd`.

```
figure
x = linspace(0,10);
y1 = sin(x);
plot(x,y1)
title('Line Plot 1')
ax1 = gca;
```

```
figure
y2 = 2*sin(x);
plot(x,y2)
title('Line Plot 2')
lgd = legend('2*Sin(x)');
ax2 = gca;
```

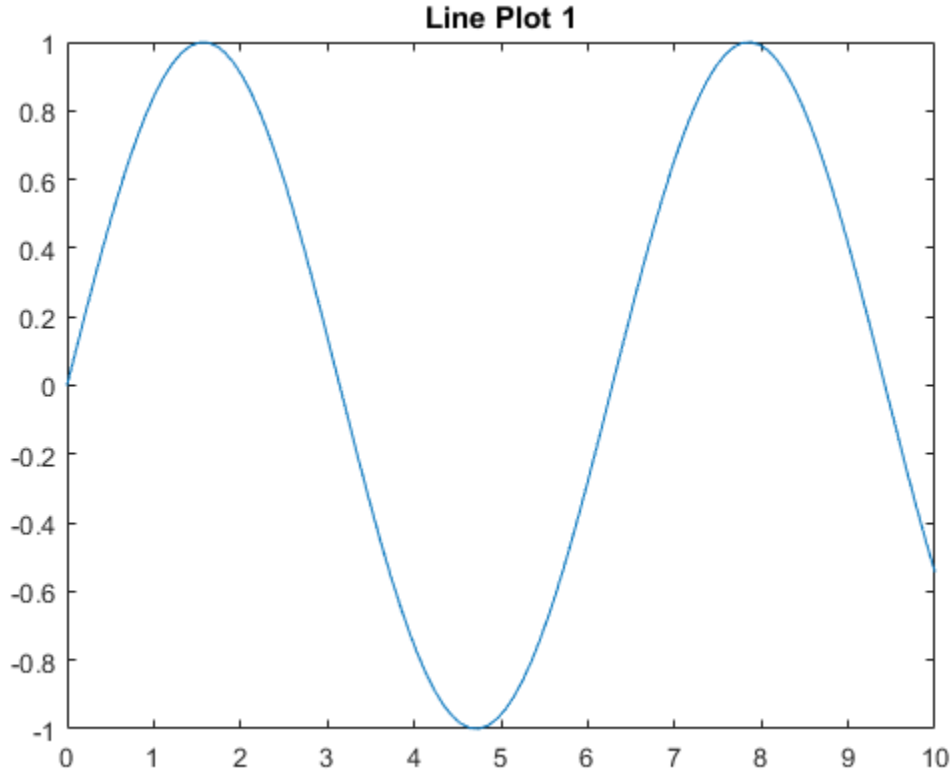

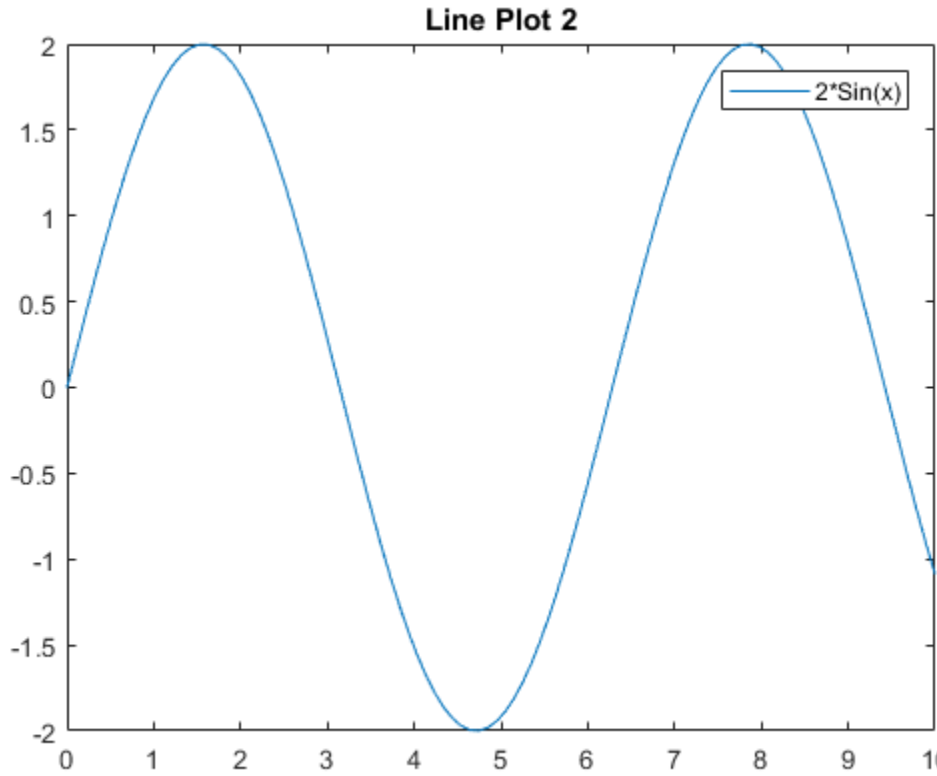

Create copies of the two `Axes` objects using `copyobj`. Specify the parents of the copied axes as a new figure. Since legends and colorbars do not get copied with the associated axes, copy the legend with the axes.

```
fnew = figure;
ax1_copy = copyobj(ax1,fnew);
subplot(2,1,1,ax1_copy)

copies = copyobj([ax2,lgd],fnew);
ax2_copy = copies(1);
subplot(2,1,2,ax2_copy)
```

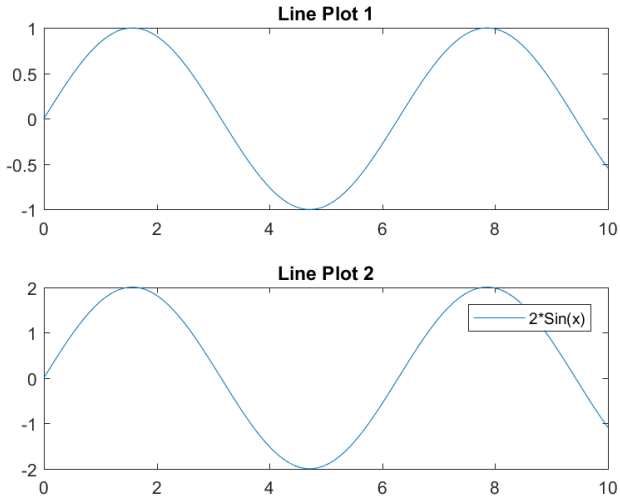

Input Arguments

m — Number of grid rows

1 (default) | positive integer

Number of grid rows, specified as a positive integer.

Data Types: `single` | `double`

n — Number of grid columns

1 (default) | positive integer

Number of grid columns, specified as a positive integer.

Data Types: `single` | `double`

p — Grid position for new axes

scalar | vector

Grid position for the new axes, specified as a scalar or vector of positive integers.

- If `p` is a scalar positive integer, then `subplot` creates a subplot in grid position `p`.

- If `p` is a vector of positive integers, then `subplot` creates a subplot that spans the grid positions listed in `p`.

Example: `subplot(2,3,1)` creates a subplot in position 1.

Example: `subplot(2,3,[2,5])` creates a subplot spanning positions 2 and 5.

Example: `subplot(2,3,[2,6])` creates a subplot spanning positions 2, 3, 5, and 6.

Data Types: `single` | `double`

`pos` — Custom position for new axes

four-element vector

Custom position for the new axes, specified as a four-element vector of the form `[left bottom width height]`.

- The `left` and `bottom` elements specify the position of the bottom-left corner of the subplot in relation to the bottom-left corner of the figure.
- The `width` and `height` elements specify the subplot dimensions.

Specify values between `0` and `1` that are normalized with respect to the interior of the figure.

Note: When using a script to create subplots, MATLAB does not finalize the `Position` property value until either a `drawnow` command is issued or MATLAB returns to await a user command. The `Position` property value for a subplot is subject to change until the script either refreshes the plot or exits.

Example: `subplot('Position',[0.1 0.1 0.45 0.45])`

Data Types: `single` | `double`

`ax` — Existing axes to make current or convert to subplot

`Axes` object | `PolarAxes` object

Existing axes to make current or convert to a subplot, specified as an `Axes` object or a `PolarAxes` object.

To create empty polar axes in a subplot position, specify `ax` as the `polaraxes` function, for example, `subplot(2,1,2,polaraxes)`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `subplot(m,n,p,'XGrid’,'on')`

For a list of properties you can set, see Axes Properties. Some plotting functions override property settings. Consider setting axes properties after plotting.

Tips

- To clear the contents of the figure, use `clf`. For example, you might clear the existing subplot layout from the figure before creating a new subplot layout.
- To overlay axes, use the `axes` command instead. The `subplot` function deletes existing axes that overlap new axes. For example, `subplot('Position', [.35 .35 .3 .3])` deletes any underlying axes, but `axes('Position', [.35 .35 .3 .3])` positions new axes in the middle of the figure without deleting underlying axes.
- `subplot(111)` is an exception and not identical in behavior to `subplot(1,1,1)`. For reasons of backwards compatibility, `subplot(111)` is a special case of subplot that does not immediately create axes, but sets up the figure so that the next graphics command executes `clf reset`. The next graphics command deletes all the figure children and creates new axes in the default position. `subplot(111)` does not return an `Axes` object and an error occurs if code specifies a return argument.

See Also

See Also

Functions
`axes` | `cla` | `clf` | `figure` | `gca`

Properties
Axes Properties

Topics

"Combine Multiple Plots"

Introduced before R2006a

subsasgn

Redefine subscripted assignment

Syntax

```
A = subsasgn(A,S,B)
```

Description

`A = subsasgn(A,S,B)` called by MATLAB for the syntax `A(i) = B`, `A{i} = B`, or `A.i = B` when `A` is an object.

MATLAB uses the built-in `subsasgn` function to interpret indexed assignment statements. Modify the indexed assignment behavior of classes by overloading `subsasgn` in the class.

Note: You must call `subsasgn` with an output argument. `subsasgn` does not modify the object used in the indexing operation (the first input argument). You must assign the output to obtain a modified object.

Input Arguments

A

Object used in indexing operation

S

Structure with two fields, `type` and `subs`. For compound indexing expressions, `S` is an array of structures, one for each level of indexing.

- `type` is a `char` vector containing `'()'`, `'{}'`, or `'.'`, indicating the type of indexing used.
- `subs` is a cell array or character array containing the actual subscripts.

B

Value being assigned (right side of assignment statement)

Output Arguments

A

Result of the assignment statement, which is the modified object passed in as the first argument.

If your implementation of a `subsasgn` method assigns more than one value, use `varargin` for the third input argument. For more information, see "Syntax for subsref, and subsasgn Methods".

Examples

Argument values for the `subsasgn` for the expression shown:

```
A(1:2,:) = B;
```

The syntax `A(1:2,:) = B` calls `A = subsasgn(A,S,B)` where `S` is a structure with `S.type = '()'` and `S.subs = {1:2,':'}`. The colon character (`':'`) indicates a colon used as a subscript.

For the expression:

```
A{1:2} = B;
```

The syntax `A{1:2} = B` calls `A = subsasgn(A,S,B)` where `S.type = '{}'` and `S.subs = {[1 2]}`.

For the expression:

```
A.field = B;
```

The syntax `A.field = B` calls `A = subsasgn(A,S,B)` where `S.type = '.'` and `S.subs = 'field'`.

For the expression:

```
A(1,2).name(3:5) = B;
```

Simple calls combine in a straightforward way for more complicated indexing expressions. In such cases, `length(S)` is the number of subscripting levels. For instance, `A(1,2).name(3:5) = B` calls `A = subsasgn(A,S,B)` where `S` is a 3-by-1 array of structures with the following values:

```
S(1).type = '()'        S(2).type = '.'         S(3).type = '()'
S(1).subs = {1,2}       S(2).subs = 'name'      S(3).subs = {[3 4 5]}
```

Tips

Within the `subsasgn` method defined by a class, MATLAB calls the built-in `subsasgn`. Calling the built-in enables you to use the default indexing behavior when defining specialized indexing. For more information, see "Built-In subsref and subsasgn Called in Methods".

Algorithms

In the assignment `A(J,K,...) = B(M,N,...)`, subscripts `J`, `K`, `M`, `N`, and so on, can be scalar, vector, or arrays, when all the following are true:

- The number of subscripts specified for `B`, excluding trailing subscripts equal to 1, does not exceed the value returned by `ndims(B)`.
- The number of nonscalar subscripts specified for `A` equals the number of nonscalar subscripts specified for `B`. For example, `A(5,1:4,1,2) = B(5:8)` is valid because both sides of the equation use one nonscalar subscript.
- The order and length of all nonscalar subscripts specified for `A` matches the order and length of nonscalar subscripts specified for `B`. For example, `A(1:4,3,3:9) = B(5:8,1:7)` is valid because both sides of the equation (ignoring the one scalar subscript `3`) use a 4-element subscript followed by a 7-element subscript.

See Also

See Also

`numArgumentsFromSubscript` | `subsref` | `substruct`

Topics

"Indexed Assignment"
"Code Patterns for subsref and subsasgn Methods"
"Number of Arguments for subsref and subsasgn"
"Modify nargout and nargin for Indexing Methods"

Introduced before R2006a

subsindex

Convert object to array index

Syntax

```
ind = subsindex(A)
```

Description

MATLAB calls `subsindex` to convert an object into an integer index. Define a `subsindex` method for your class if you want to use objects of the class as array indices.

`ind = subsindex(A)` called by MATLAB for the expression `X(A)` when `A` is an object. MATLAB does not call `subsindex` if the indexing expression results in a call to an overloaded `subsref` or `subsasgn` method for the class of `X`. `subsindex` must return the value of the object as a zero-based integer index. `ind` must contain integer values in the range `0` to `prod(size(X))-1`.

MATLAB invokes `subsindex` separately on all the subscripts in an expression, such as `X(A,B)`.

See Also

`subsasgn` | `subsref`

Topics

"Objects in Index Expressions"

Introduced before R2006a

subspace

Angle between two subspaces

Syntax

```
theta = subspace(A,B)
```

Description

`theta = subspace(A,B)` finds the angle between two subspaces specified by the columns of `A` and `B`. If `A` and `B` are column vectors of unit length, this is the same as `acos(abs(A'*B))`.

Examples

Consider two subspaces of a Hadamard matrix, whose columns are orthogonal.

```
H = hadamard(8);
A = H(:,2:4);
B = H(:,5:8);
```

Note that matrices `A` and `B` are different sizes — `A` has three columns and `B` four. It is not necessary that two subspaces be the same size in order to find the angle between them. Geometrically, this is the angle between two hyperplanes embedded in a higher dimensional space.

```
theta = subspace(A,B)
theta =
    1.5708
```

That `A` and `B` are orthogonal is shown by the fact that `theta` is equal to $\pi/2$.

```
theta - pi/2
ans =
     0
```

Tips

If the angle between the two subspaces is small, the two spaces are nearly linearly dependent. In a physical experiment described by some observations `A`, and a second realization of the experiment described by `B`, `subspace(A,B)` gives a measure of the amount of new information afforded by the second experiment not associated with statistical errors of fluctuations.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Introduced before R2006a

subsref

Redefine subscripted reference for objects

Syntax

```
B = subsref(A,S)
```

Description

`B = subsref(A,S)` is called by MATLAB for the syntax `A(i)`, `A{i}`, or `A.i` when `A` is an object.

MATLAB uses the built-in `subsref` function to interpret indexed references to objects. To modify the indexed reference behavior of objects, overload `subsref` in the class.

Input Arguments

A

Object used in indexing operation

S

Structure with two fields, `type` and `subs`. For compound indexing expressions, `S` is an array of structures, one for each level of indexing.

- `type` is a `char` vector containing `'()'`, `'{}'`, or `'.'`, indicating the type of indexing used.
- `subs` is a cell array or character array containing the actual subscripts.

Output Arguments

B

Result of the indexed expression.

If your implementation of a `subsref` method returns either no output or more than one output, use `varargout` for the output argument. For more information, see "Syntax for subsref, and subsasgn Methods".

Examples

See how MATLAB calls `subsref` for the expression:

```
A(1:2,:)
```

The syntax `A(1:2,:)` calls `B = subsref(A,S)` where `S` is a 1-by-1 structure with `S.type='()'` and `S.subs={1:2,':'}`. The colon character `':'` indicates a colon used as a subscript.

See how MATLAB calls `subsref` for the expression:

```
A{1:2}
```

The syntax `A{1:2}` calls `B = subsref(A,S)` where `S.type='{}'` and `S.subs={[1 2]}`.

See how MATLAB calls `subsref` for the expression:

```
A.field
```

The syntax `A.field` calls `B = subsref(A,S)` where `S.type='.'` and `S.subs='field'`.

See how MATLAB calls `subsref` for the expression:

```
A(1,2).name(3:5)
```

Simple calls combine in a straightforward way for more complicated indexing expressions. In such cases, `length(S)` is the number of subscript levels. For instance, `A(1,2).name(3:5)` calls `subsref(A,S)` where `S` is a 3-by-1 structure array with the following values:

`S(1).type='()'`	`S(2).type='.'`	`S(3).type='()'`
`S(1).subs={1,2}`	`S(2).subs='name'`	`S(3).subs={[3 4 5]}`

Tips

Within the `subsref` method defined by a class, MATLAB calls the built-in `subsref`. Calling the built-in enables you to use the default indexing behavior when defining specialized indexing. For more information, see "Built-In subsref and subsasgn Called in Methods".

See Also

See Also

`numArgumentsFromSubscript` | `subsasgn` | `substruct`

Topics

"Indexed Reference"
"Code Patterns for subsref and subsasgn Methods"
"Number of Arguments for subsref and subsasgn"
"Modify nargout and nargin for Indexing Methods"

Introduced before R2006a

substruct

Create structure argument for `subsasgn` or `subsref`

Syntax

```
S = substruct(type1, subs1, type2, subs2, ...)
```

Description

`S = substruct(type1, subs1, type2, subs2, ...)` creates a structure with the fields required by an overloaded `subsref` or `subsasgn` method. Each `type` `char` vector must be one of `'.'`, `'()'`, or `'{}'`. The corresponding `subs` argument must be either a field name (for the `'.'` type) or a cell array containing the index vectors (for the `'()'` or `'{}'` types).

Output Arguments

S

`struct` with these fields:

- `type`: one of `'.'`, `'()'`, or `'{}'`
- `subs`: subscript values (field name or cell array of index vectors)

Examples

Call `subsref` with arguments equivalent to the syntax:

```
B = A(3,5).field;
```

where `A` is an object of a class that implements a `subsref` method

Use `substruct` to form the input `struct`, `S`:

```
S = substruct('()',{3,5},'.','field');
```

Call the class method:

```
B = subsref(A,S);
```

The `struct` created by `substruct` in this example contains:

```
disp(S(1))
    type: '()'
    subs: {[3]  [5]}

disp(S(2))
    type: '.'
    subs: 'field'
```

Tutorials

- "Object Array Indexing"

See Also

`subsasgn` | `subsref`

Topics

"Object Array Indexing"

Introduced before R2006a

subvolume

Extract subset of volume data set

Syntax

```
[Nx,Ny,Nz,Nv] = subvolume(X,Y,Z,V,limits)
[Nx,Ny,Nz,Nv] = subvolume(V,limits)
Nv = subvolume(...)
```

Description

`[Nx,Ny,Nz,Nv] = subvolume(X,Y,Z,V,limits)` extracts a subset of the volume data set `V` using the specified axis-aligned `limits`. `limits = [xmin,xmax,ymin, ymax,zmin,zmax]` (Any `NaN`s in the limits indicate that the volume should not be cropped along that axis.)

The arrays `X`, `Y`, and `Z` define the coordinates for the volume `V`. The subvolume is returned in `NV` and the coordinates of the subvolume are given in `NX`, `NY`, and `NZ`.

`[Nx,Ny,Nz,Nv] = subvolume(V,limits)` assumes the arrays `X`, `Y`, and `Z` are defined as

```
[X,Y,Z] = meshgrid(1:N,1:M,1:P)
```

where `[M,N,P] = size(V)`.

`Nv = subvolume(...)` returns only the subvolume.

Examples

Extract Subset of Volumne Data Set

Load the `mri` data set, which is a collection of MRI slices of a human skull. Then:

- Squeeze the four-dimensional array into three dimensions and extract a subset using `subvolume`.

- Use a patch to display an isosurface of the skull outline.
- Add a second patch with interpolated face colors.
- Set the view of the object.
- Change the colormap to a grayscale colormap.
- Add lights to the right and left of the camera to illuminate the object.

```
load mri
D = squeeze(D);
[x,y,z,D] = subvolume(D,[60,80,nan,80,nan,nan]);
p1 = patch(isosurface(x,y,z,D, 5),...
     'FaceColor','red','EdgeColor','none');
isonormals(x,y,z,D,p1);
p2 = patch(isocaps(x,y,z,D, 5),...
     'FaceColor','interp','EdgeColor','none');
view(3);
axis tight;
daspect([1 1 0.4])
colormap(gray(100))
camlight right;
camlight left;
lighting gouraud
```

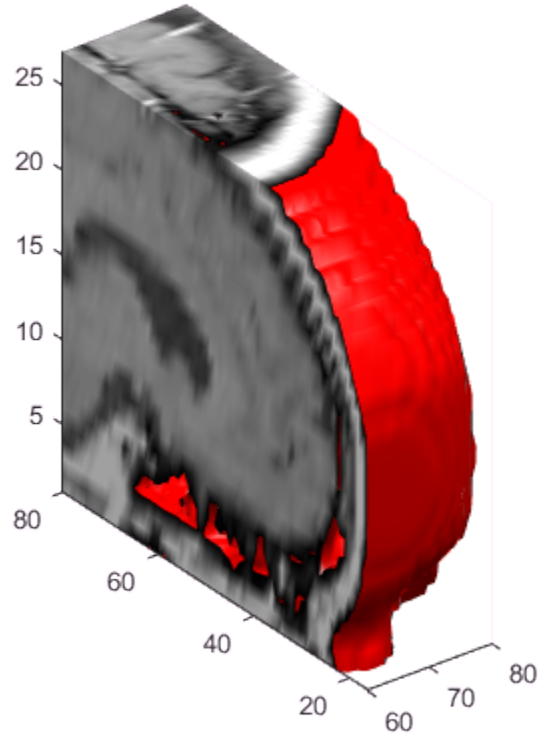

See Also

`isocaps` | `isonormals` | `isosurface` | `reducepatch` | `reducevolume` | `smooth3`

Introduced before R2006a

sum

Sum of array elements

Syntax

```
S = sum(A)
S = sum(A,dim)
S = sum( ___ ,outtype)
S = sum( ___ ,nanflag)
```

Description

`S = sum(A)` returns the sum of the elements of A along the first array dimension whose size does not equal 1.

- If `A` is a vector, then `sum(A)` returns the sum of the elements.
- If `A` is a matrix, then `sum(A)` returns a row vector containing the sum of each column.
- If `A` is a multidimensional array, then `sum(A)` operates along the first array dimension whose size does not equal 1, treating the elements as vectors. This dimension becomes `1` while the sizes of all other dimensions remain the same.

`S = sum(A,dim)` returns the sum along dimension `dim`. For example, if `A` is a matrix, then `sum(A,2)` is a column vector containing the sum of each row.

`S = sum( ___ ,outtype)` returns the sum with a specified data type, using any of the input arguments in the previous syntaxes. `outtype` can be `'default'`, `'double'`, or `'native'`.

`S = sum( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. `sum(A,'includenan')` includes all `NaN` values in the calculation while `sum(A,'omitnan')` ignores them.

Examples

Sum of Vector Elements

Create a vector and compute the sum of its elements.

```
A = 1:10;
S = sum(A)
```

```
S = 55
```

Sum of Matrix Columns

Create a matrix and compute the sum of the elements in each column.

```
A = [1 3 2; 4 2 5; 6 1 4]
```

```
A =

     1     3     2
     4     2     5
     6     1     4


S = sum(A)
```

```
S =

    11     6    11
```

Sum of Matrix Rows

Create a matrix and compute the sum of the elements in each row.

```
A = [1 3 2; 4 2 5; 6 1 4]
```

```
A =

     1     3     2
     4     2     5
     6     1     4


S = sum(A,2)
```

```
S =

     6
```

```
    11
    11
```

Sum of 3-D Array

Create a 4-by-2-by-3 array of ones and compute the sum along the third dimension.

```
A = ones(4,2,3);
S = sum(A,3)
```

```
S =

     3     3
     3     3
     3     3
     3     3
```

Sum of 32-bit Integers

Create a vector of 32-bit integers and compute the `int32` sum of its elements by specifying the output type as `native`.

```
A = int32(1:10);
S = sum(A,'native')
```

```
S = int32
    55
```

Sum Excluding `NaN`

Create a vector and compute its sum, excluding `NaN` values.

```
A = [1.77 -0.005 3.98 -2.95 NaN 0.34 NaN 0.19];
S = sum(A,'omitnan')
```

```
S = 3.3250
```

If you do not specify `'omitnan'`, then `sum(A)` returns `NaN`.

Input Arguments

A — Input array

vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

- If A is a scalar, then sum(A) returns A.
- If A is an empty 0-by-0 matrix, then sum(A) returns 0.

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64 | logical | char | duration
Complex Number Support: Yes

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension dim indicates the dimension whose length reduces to 1. The size(S,dim) is 1, while the sizes of all other dimensions remain the same.

Consider a two-dimensional input array, A:

- sum(A,1) operates on successive elements in the columns of A and returns a row vector of the sums of each column.

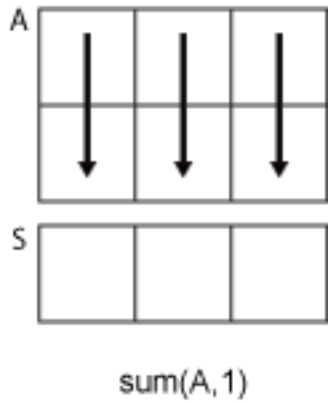

- `sum(A,2)` operates on successive elements in the rows of `A` and returns a column vector of the sums of each row.

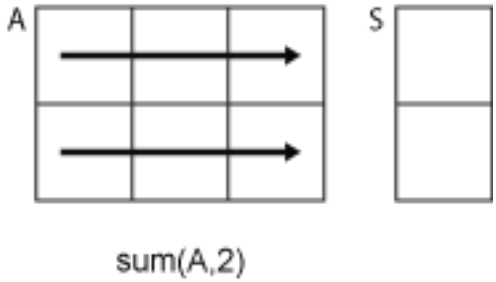

`sum` returns `A` when `dim` is greater than `ndims(A)` or when `size(A,dim)` is `1`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`outtype` — Output data type
`'default'` (default) | `'double'` | `'native'`

Output data type, specified as `'default'`, `'double'`, or `'native'`. These options also specify the data type in which the operation is performed.

`outtype`	Output data type
`'default'`	`double`, unless the input data type is `single` or `duration`, in which case, the output is `'native'`
`'double'`	`double`, unless the data type is `duration`, in which case, `'double'` is not supported
`'native'`	same data type as the input, unless the input data type is `char`, in which case, `'native'` is not supported

Data Types: `char`

`nanflag` — `NaN` condition
'`includenan`' (default) | '`omitnan`'

`NaN` condition, specified as one of these values:

- `'includenan'` — Include `NaN` values when computing the sum, resulting in `NaN`.

- `'omitnan'` — Ignore all `NaN` values in the input.

Data Types: `char`

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you specify `dim`, then it must be a constant.
- The `outtype` and `nanflag` options must be constant character vectors.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`cumsum` | `diff` | `mean` | `prod`

Introduced before R2006a

summary

Print summary of table, timetable, or categorical array

Syntax

```
summary(T)
s = summary(T)
```

```
summary(A)
summary(A,dim)
```

Description

`summary(T)` prints a summary of the table or timetable `T`.

- If `T` is a table, then the table summary displays the description from `T.Properties.Description` followed by a summary of the table variables.
- If `T` is a timetable, then the timetable summary displays the description from `T.Properties.Description`, a summary of the row times, and then a summary of the timetable variables.

`s = summary(T)` returns a structure, `s`, that contains a summary of `T`. Each field of `s` is itself a structure that summarizes the values in the corresponding variable of `T`. If `T` is a timetable, then `s` also has a field that summarizes the row times of `T`.

`summary(A)` prints a summary of the categorical array `A`.

- If `A` is a vector, then `summary(A)` displays the category names along with the number of elements in each category (the category counts). It also displays the number of elements that are undefined.
- If `A` is a matrix, then `summary` treats the columns of `A` as vectors and displays the category counts for each column of `A`.
- If `A` is a multidimensional array, then `summary` acts along the first array dimension whose size does not equal `1`.

`summary(A,dim)` prints the category counts of the categorical array `A` along dimension `dim`.

For example, you can display the counts of each row in a categorical array using `summary(A,2)`.

Examples

Summary of Table

Create a table.

```
load patients
BloodPressure = [Systolic Diastolic];
T = table(Gender,Age,Smoker,BloodPressure,'RowNames',LastName);
```

Add descriptions and units to table `T`.

```
T.Properties.Description = 'Simulated patient data';
T.Properties.VariableUnits =  {''  'Yrs' ''  'mm Hg'};
T.Properties.VariableDescriptions{4} = 'Systolic/Diastolic';
```

Print a summary of table `T`.

```
format compact
```

```
summary(T)
```

```
Description:  Simulated patient data
Variables:
    Gender: 100×1 cell array of character vectors
    Age: 100×1 double
        Units:  Yrs
        Values:
            Min       25
            Median    39
            Max       50
    Smoker: 100×1 logical
        Values:
            True     34
            False    66
    BloodPressure: 100×2 double
        Units:  mm Hg
        Description:  Systolic/Diastolic
        Values:
                      BloodPressure_1    BloodPressure_2
                      _______________    _______________
```

```
            Min       109                  68
            Median    122                81.5
            Max       138                  99
```

`summary` displays the minimum, median, and maximum values for each column of the variable `BloodPressure`.

Summary of Timetable

Create a small timetable.

```
Time = [seconds(1:5)]';
TT = timetable(Time,[98;97.5;97.9;98.1;97.9],[120;111;119;117;116],...
               'VariableNames',{'Reading1','Reading2'})
```

```
TT = 5×2 timetable
     Time    Reading1    Reading2
    _____    ________    ________

    1 sec      98         120
    2 sec    97.5         111
    3 sec    97.9         119
    4 sec    98.1         117
    5 sec    97.9         116
```

Print a summary of the timetable. `summary` prints a summary of the row times, followed by a summary of the variables. If the timetable is regular, then `summary` also prints the size of the time step between row times.

```
summary(TT)
```

```
RowTimes:

    Time: 5×1 duration
        Values:

            Min          1 sec
            Median       3 sec
            Max          5 sec
            TimeStep     1 sec

Variables:

    Reading1: 5×1 double
```

```
        Values:

            Min       97.5
            Median    97.9
            Max       98.1

    Reading2: 5×1 double

        Values:

            Min       111
            Median    117
            Max       120
```

Return Summary of Table as Structure

Create a table. Add units to the table variables. Then display the first few rows.

```
load patients
BloodPressure = [Systolic Diastolic];
T = table(Gender,Age,Smoker,BloodPressure,'RowNames',LastName);
T.Properties.VariableUnits =  {''  'Years' ''  'mm Hg'};
head(T,3)
```

```
ans = 3×4 table
                 Gender     Age    Smoker    BloodPressure
                ________    ___    ______    _____________

    Smith       'Male'      38     true      124     93
    Johnson     'Male'      43     false     109     77
    Williams    'Female'    38     false     125     83
```

Return a summary of the table. To return a summary as a structure, specify an output argument when using the `summary` function.

```
s = summary(T)
```

```
s = struct with fields:
           Gender: [1×1 struct]
              Age: [1×1 struct]
           Smoker: [1×1 struct]
    BloodPressure: [1×1 struct]
```

Display the summary of the table variable `Age`. For each variable of `T`, the output argument `s` has a field that contains its summary.

```
s.Age
```

```
ans = struct with fields:
           Size: [100 1]
           Type: 'double'
    Description: ''
          Units: 'Years'
            Min: 25
         Median: 39
            Max: 50
     NumMissing: 0
```

The `NumMissing` field shows the number of elements that are the missing value. In this case, `Age` does not contain any `NaN` values, so `NumMissing` is zero. `summary` includes the `NumMissing` field for numeric, `duration`, `datetime`, and `categorical` variables.

Display the minimum age contained in the table. You can access any field of the summary by name.

```
s.Age.Min
```

```
ans = 25
```

Display the summary of the table variable `Smoker`. You can determine the numbers of smokers and nonsmokers from the `True` and `False` fields. The information contained in the summary of a table variable depends on the data type of the variable.

```
s.Smoker
```

```
ans = struct with fields:
           Size: [100 1]
           Type: 'logical'
    Description: ''
          Units: ''
           True: 34
          False: 66
```

Return Summary of Timetable as Structure

Create a timetable.

```
Time = datetime({'2015-12-18 08:00:00';'2015-12-18 10:00:00';'2015-12-18 12:00:00'});
Temp = [37.3;39.1;42.3];
Pressure = [30.1;30.03;29.9];
TT = timetable(Time,Temp,Pressure)
```

```
TT = 3×2 timetable
            Time            Temp    Pressure
    ____________________    ____    ________

    18-Dec-2015 08:00:00    37.3     30.1
    18-Dec-2015 10:00:00    39.1    30.03
    18-Dec-2015 12:00:00    42.3     29.9
```

Return a summary of the timetable as a structure.

```
s = summary(TT)
```

```
s = struct with fields:
        Time: [1×1 struct]
        Temp: [1×1 struct]
    Pressure: [1×1 struct]
```

Display the summary of the row times. The `TimeStep` field shows that the time interval beween consecutive row times is two hours. The `NumMissing` field shows there are no missing values (`NaT`) in the vector of row times.

```
s.Time
```

```
ans = struct with fields:
          Size: [3 1]
          Type: 'datetime'
           Min: 18-Dec-2015 08:00:00
        Median: 18-Dec-2015 10:00:00
           Max: 18-Dec-2015 12:00:00
    NumMissing: 0
      TimeStep: 02:00:00
```

Change the last row time so that the row times have different intervals between them.

```
TT.Time(3) = '2015-12-18 11:00:00';
TT
```

```
TT = 3×2 timetable
```

```
            Time            Temp    Pressure
    ____________________    ____    ________

    18-Dec-2015 08:00:00    37.3     30.1
    18-Dec-2015 10:00:00    39.1    30.03
    18-Dec-2015 11:00:00    42.3     29.9
```

Return a summary of the updated timetable. Since the time steps between row times are different, the `TimeStep` field has a `NaN`.

```
s = summary(TT);
s.Time
```

```
ans = struct with fields:
          Size: [3 1]
          Type: 'datetime'
           Min: 18-Dec-2015 08:00:00
        Median: 18-Dec-2015 10:00:00
           Max: 18-Dec-2015 11:00:00
    NumMissing: 0
      TimeStep: NaN
```

Summary of Categorical Vector

Create a 1-by-5 categorical vector.

```
A = categorical({'plane' 'car' 'train' 'car' 'plane'})
```

```
A = 1×5 categorical array
     plane      car      train      car      plane
```

`A` has three categories, `car`, `plane`, and `train`.

Print a summary of `A`.

```
summary(A)
```

```
     car      plane      train
       2          2          1
```

`car` appears in two elements of `A`, `plane` appears in two elements, and `train` appears in one element.

Since A is a row vector, summary lists the occurrences of each category horizontally.

Summary of Each Column in Categorical Array

Create a 3-by-2 categorical array, A, from a numeric array.

```
X = [1 3; 2 1; 3 1; 4 2];
valueset = 1:3;
catnames = {'red' 'green' 'blue'};

A = categorical(X,valueset,catnames)
```

```
A = 4×2 categorical array
     red              blue
     green            red
     blue             red
     <undefined>      green
```

A has three categories, red, green, and blue. The value, 4, was not included in the valueset input to the categorical function. Therefore, the corresponding element, A(4,1), does not have a corresponding category and is undefined.

Print a summary of A.

```
summary(A)
```

```
     red              1       2
     green            1       1
     blue             1       1
     <undefined>      1       0
```

red appears in one element in the first column of A and two in the second column.

green appears in one element in the first column of A and none in the second column.

blue appears in one element in the first column of A and one in the second column.

A contains only one undefined element. It occurs in the first column.

Category Counts of Each Row in Categorical Array

Create a 3-by-2 categorical array, A, from a numeric array.

```
A = categorical([1 3; 2 1; 3 1],1:3,{'red' 'green' 'blue'})
```

```
A = 3×2 categorical array
     red        blue
     green      red
     blue       red
```

A has three categories, red, green, and blue.

Print a summary of A along the second dimension.

```
summary(A,2)
```

```
     red       green      blue
       1           0         1
       1           1         0
       1           0         1
```

red appears in one element in the first row of A, one in the second row, and one in the third row.

green appears in only one element. It occurs in the second row of A.

blue appears in one element in the first row of A and one in the third column.

- "Create and Work with Tables"
- "Modify Units, Descriptions and Table Variable Names"
- "Access Data in a Table"
- "Create Categorical Arrays"
- "Access Data Using Categorical Arrays"

Input Arguments

T — Input table

table | timetable

Input table, specified as a table or a timetable.

A — Categorical array

vector | matrix | multidimensional array

Categorical array, specified as a vector, matrix, or multidimensional array.

`dim` — Dimension of `A` to operate along
positive integer scalar

Dimension of `A` to operate to along, specified as a positive integer scalar. If no value is specified, the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional categorical array `A`:

If `dim = 1`, then `summary(A,dim)` displays the category counts for each column of `A`.

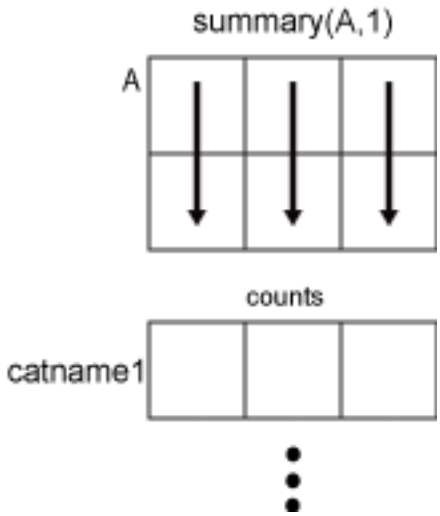

If `dim = 2`, then `summary(A,dim)` returns the category counts of each row of `A`.

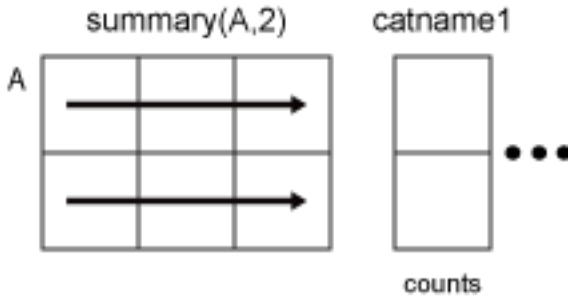

If `dim` is greater than `ndims(A)`, then `summary(A)` returns an array the same size as `A` for each category. `summary` returns `1` for elements in the corresponding category and `0` otherwise.

Output Arguments

`s` — Summary of table or timetable variables

scalar structure

Summary of the table or timetable variables, returned as a scalar structure. For each variable `T.`*`VarName`* in the input table `T`, the output structure `s` contains a field `s.`*`VarName`* with the summary for that variable.

For each data type, `s.`*`VarName`* contains the fields shown below. You can access the fields with dot indexing. For example, `s.`*`VarName`*`.Size` returns the size of the table variable named *`VarName`*.

Type of Table or Timetable Variable	Fields for Summary of Variable	Description
Numeric, `datetime`, or `duration`	`Size`	Size of variable, stored as a numeric array
	`Type`	Type of variable, stored as a character vector
	`Description`	Description of variable, stored as a character vector
	`Units`	Units of variable, stored as a character vector
	`Min`	Minimum value
	`Median`	Median value
	`Max`	Maximum value
	`NumMissing`	Number of missing values (`NaN` or `NaT`)
logical	`Size`	Size of variable, stored as a numeric array
	`Type`	Type of variable, stored as a character vector

Type of Table or Timetable Variable	Fields for Summary of Variable	Description
	`Description`	Description of variable, stored as a character vector
	`Units`	Units of variable, stored as a character vector
	`True`	Number of `true` values
	`False`	Number of `false` values
`categorical`	`Size`	Size of variable, stored as a numeric array
	`Type`	Type of variable, stored as a character vector
	`Description`	Description of variable, stored as a character vector
	`Units`	Units of variable, stored as a character vector
	`Categories`	Categories, stored as a cell array of character vectors
	`Counts`	Number of elements in each category, stored as a numeric array
	`NumMissing`	Number of missing values (`<undefined>`)
Other	`Size`	Size of variable, stored as a numeric array
	`Type`	Type of variable, stored as a character vector
	`Description`	Description of variable, stored as a character vector
	`Units`	Units of variable, stored as a character vector

If `T` is a timetable, then `s` also has a field with a summary of the row times. For timetable row times only, the summary includes the `TimeStep` field. If the row times increase or

decrease monotonically by a fixed time step, then `TimeStep` has a numeric value. If the row times are irregular, then `TimeStep` is `NaN`.

Fields for Summary of Timetable Row Times	Description of Fields
`Size`	Size of vector of row times, stored as a numeric array
`Type`	Data type, stored as a character vector
`Min`	Minimum value
`Median`	Median value
`Max`	Maximum value
`NumMissing`	Number of missing values (`NaT` or `NaN`)
`TimeStep`	Time step between consecutive row times (`NaN` if irregular)

Definitions

Table Summary

The table summary displays the table description from `T.Properties.Description` followed by information on the variables of `T`.

The summary contains the following information on the variables:

- Name: Size and Data Type — Variable name from `T.Properties.VariableNames`, the size of the variable, and the data type of the variable.
- Units — Variable units from `T.Properties.VariableUnits`.
- Description — Variable description from `T.Properties.VariableDescriptions`.
- Values — Only included for numeric, logical, `categorical`, `datetime`, or `duration` variables.
  - Numeric, `datetime`, or `duration` variables — minimum, median, and maximum values. Also, the number of missing values (`NaN`s or `NaT`s) is included when that number is greater than zero.
  - Logical variables — number of values that are `true` and the number of values that are `false`.

- `categorical` variables — number of elements from each category. Also, the number of undefined elements is included when that number is greater than zero.

If `T` is a timetable, then the summary contains the same information on the vector of row times.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

Some fields in the tall table summary can be impossible to calculate in a reasonable amount of time, such as the median.

For more information, see “Tall Arrays”.

See Also

See Also

`categorical` | `categories` | `countcats` | `table` | `timetable`

Topics

“Create and Work with Tables”
“Modify Units, Descriptions and Table Variable Names”
“Access Data in a Table”
“Create Categorical Arrays”
“Access Data Using Categorical Arrays”

Introduced in R2013b

summer

Summer colormap array

Syntax

```
c = summer
c = summer(m)
```

Description

`c = summer` returns the summer colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = summer(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the summer colormap.

```
surf(peaks);
colormap('summer');
```

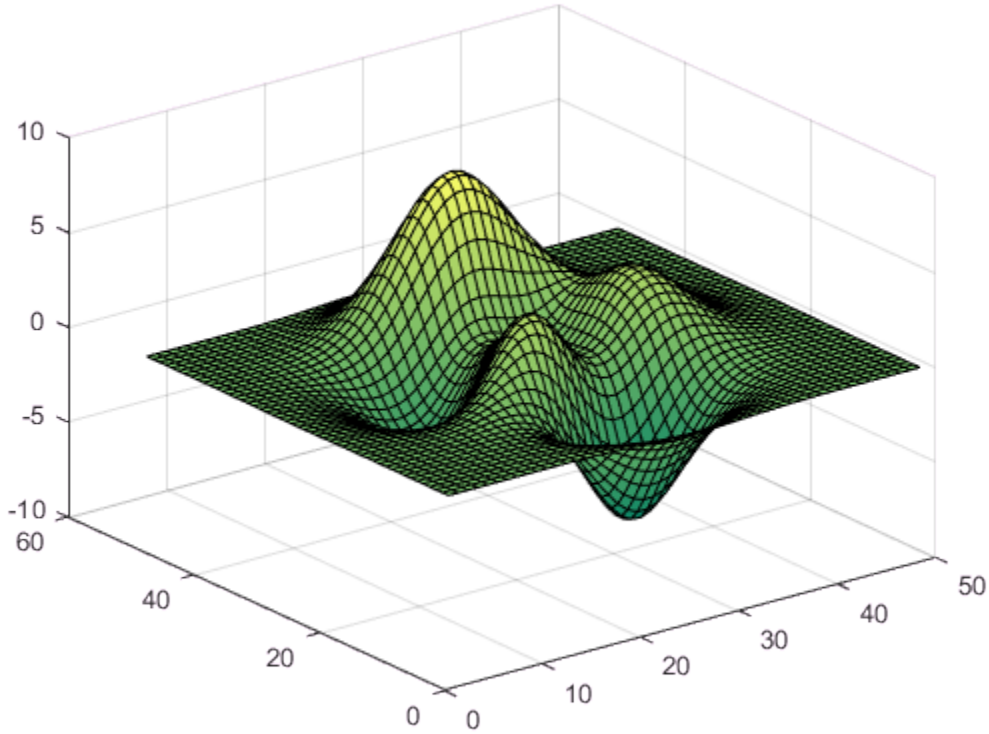

Get the summer colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = summer;
c = flipud(c);
colormap(c);
```

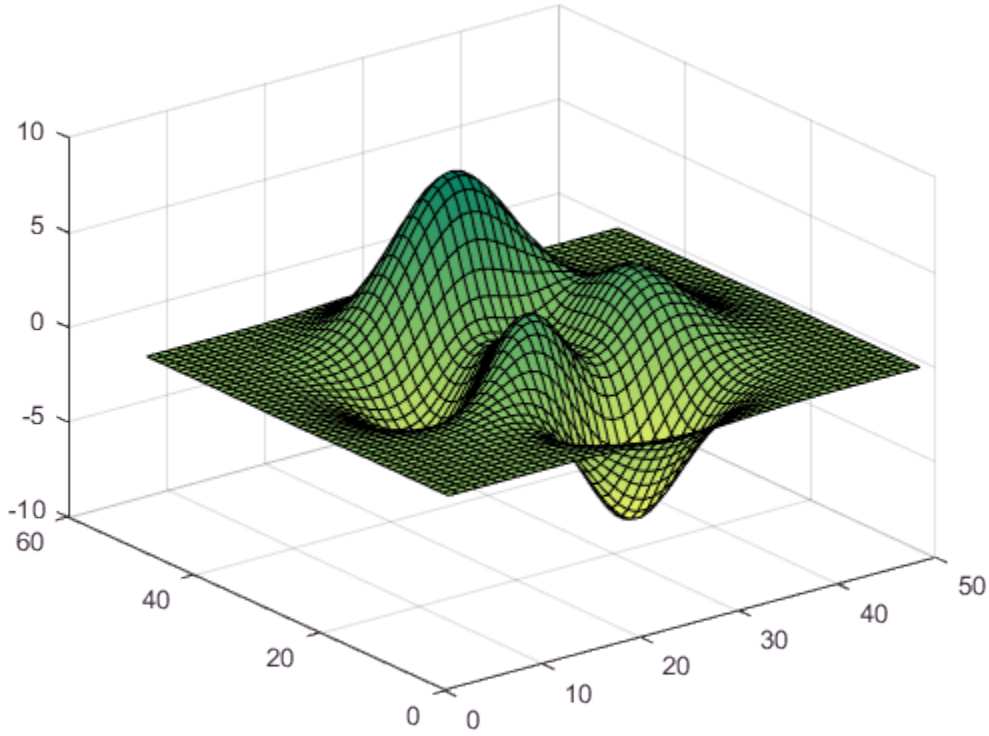

Downsample the Summer Colormap

Get a downsampled version of the summer colormap containing only ten colors. Then display the contours of the peaks function by applying the colormap and interpolated shading.

```
c = summer(10);
surf(peaks);
colormap(c);
shading interp;
```

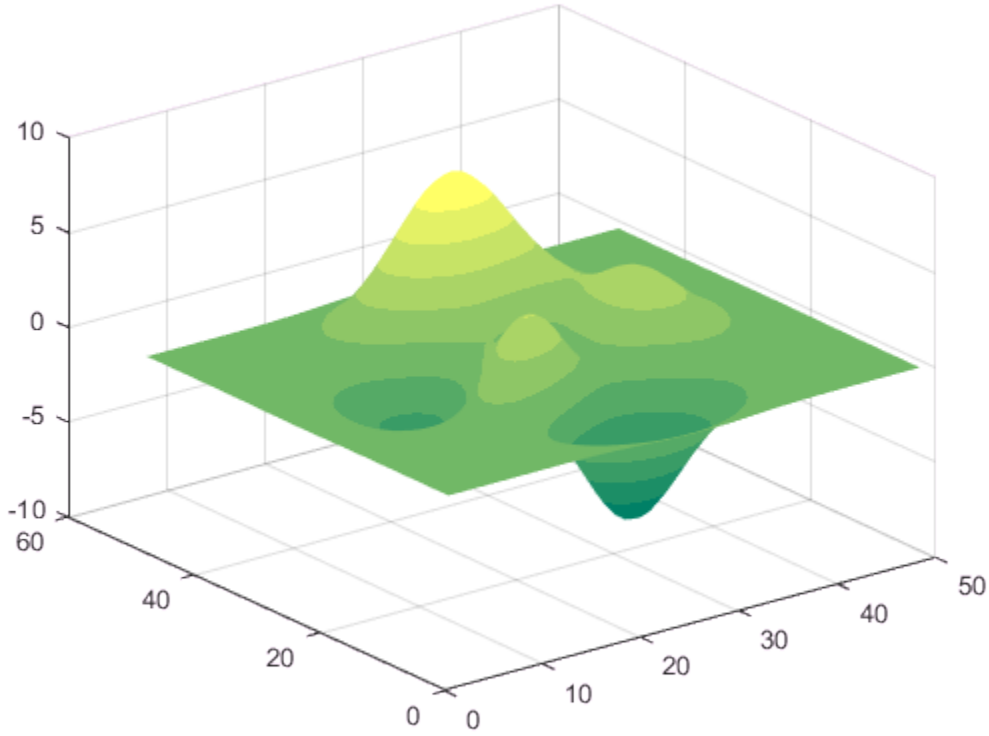

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

superclasses

Names of superclasses

Syntax

```
superclasses(ClassName)
superclasses(obj)
s = superclasses( ___ )
```

Description

`superclasses(ClassName)` displays the names of all visible superclasses of the MATLAB class with the name `ClassName`. Visible classes have a `Hidden` attribute value of `false` (the default).

`superclasses(obj)` displays the names of all visible superclasses of object `obj`, where `obj` is an instance of a MATLAB class. `obj` can be either a scalar object or an array of objects.

`s = superclasses( ___ )` returns the superclass names in a cell array of character vectors.

Examples

Superclass from Class Name

Find the superclasses for the `matlab.lang.OnOffSwitchState` class.

```
superclasses('matlab.lang.OnOffSwitchState')
```

```
Superclasses for class matlab.lang.OnOffSwitchState:

    logical
```

Superclass from Class Object

Find the superclasses for an instance of the `containers.Map` class.

```
m = containers.Map('May',70)
superclasses(m)
```

```
Superclasses for class containers.Map:

    handle
```

Input Arguments

`ClassName` — Class name
character vector

Class name, specified as a character vector.

Example: `superclasses('MyClass')`

Data Types: `char`

`obj` — Object of class
Object

Object of a MATLAB class, specified as a single object or an object array.

Example: `superclasses(obj)`

Output Arguments

`s` — Superclass names
`cellstr`

Superclass names, returned as a cell array of character vectors.

See Also

See Also
`enumeration` | `events` | `methods` | `properties`

Introduced in R2008a

support

Open MathWorks Technical Support Web page

Note: `support` will be removed in a future release.

Syntax

```
support
```

Description

`support` opens the MathWorks Technical Support Web page, http://www.mathworks.com/support, in a Web browser.

This Web page contains resources including

- A search engine, including an option for solutions to common problems
- Information about installation and licensing
- A patch archive for bug fixes you can download
- Other useful resources

See Also

`doc` | `web`

Introduced before R2006a

Support Package Installer

Install support for third-party hardware or software

Description

Use Support Package Installer to install support packages. The support packages add support for specific third-party hardware or software to specific MathWorks products.

Support Package Installer can:

- Display a list of available, installable, installed, or updatable support packages.
- Install, update, download, or uninstall a support package.
- Update the firmware on specific third-party hardware.

If the support package installs third-party software, Support Package Installer displays a list of the software and licenses for you to review before continuing with the installation.

Open the Support Package Installer App

- On the MATLAB toolstrip, click **Add-Ons** > **Get Hardware Support Packages**.

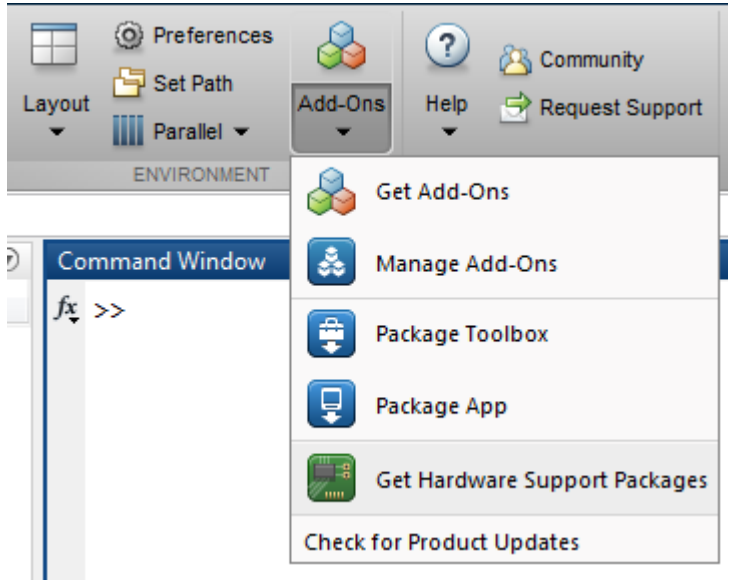

- In the MATLAB Command Window, enter `supportPackageInstaller`.
- Double-click a support package installation file (`*.mlpkginstall`).

See Also

See Also

Functions

`matlabshared.supportpkg.checkForUpdate` | `matlabshared.supportpkg.getInstalled` | `supportPackageInstaller` | `targetupdater`

supportPackageInstaller

Install support for third-party hardware or software (Not recommended)

Compatibility

`supportPackageInstaller` is not recommended. To install support packages, on the MATLAB **Home** tab, in the **Environment** section, click **Add-Ons** > **Get Hardware Support Packages**

To uninstall support packages, click **Add-Ons** > **Manage Add-ons**.

Syntax

```
supportPackageInstaller
```

Description

The `supportPackageInstaller` function opens *Support Package Installer*.

Use Support Package Installer to install support packages. The support packages add support for specific third-party hardware or software to specific MathWorks products.

Support Package Installer can:

- Display a list of available, installable, installed, or updatable support packages.
- Install, update, download, or uninstall a support package.
- Update the firmware on specific third-party hardware.

If the support package installs third-party software, Support Package Installer displays a list of the software and licenses for you to review before continuing with the installation.

Examples

Use the supportPackageInstaller Function

Enter the function in the MATLAB Command Window:

`supportPackageInstaller`

This action starts the Support Package Installer.

See Also

See Also

`matlabshared.supportpkg.checkForUpdate` | `matlabshared.supportpkg.getInstalled` | `targetupdater`

Topics

"Support Package Installation"

External Websites

Hardware Support Catalog

surf

Surface plot

Syntax

```
surf(X,Y,Z)
surf(X,Y,Z,C)

surf(Z)
surf(Z,C)

surf(ax, ___ )
surf( ___ ,Name,Value)
s = surf( ___ )
```

Description

`surf(X,Y,Z)` creates a three-dimensional surface plot. The function plots the values in matrix `Z` as heights above a grid in the *x*-*y* plane defined by `X` and `Y`. The function also uses `Z` for the color data, so color is proportional to height.

`surf(X,Y,Z,C)` additionally specifies the surface color.

`surf(Z)` creates a surface and uses the row and column indices of the elements in `Z` as the *x* and *y* coordinates.

`surf(Z,C)` additionally specifies the surface color.

`surf(ax, ___ )` plots into the axes specified by `ax` instead of the current axes. Specify the axes as the first input argument.

`surf( ___ ,Name,Value)` specifies surface properties using one or more name-value pair arguments. For example, `'FaceAlpha',0.5` creates a semitransparent surface. Specify name-value pairs after all other input arguments.

`s = surf( ___ )` returns the chart surface object. Use `s` to modify the surface after it is created. For a list, see Chart Surface Properties.

Examples

Create Surface Plot

Create X, Y, and Z as matrices of the same size. Then plot the data as a surface. The surface uses Z for both the height and color data.

```
[X,Y] = meshgrid(1:0.5:10,1:20);
Z = sin(X) + cos(Y);
surf(X,Y,Z)
```

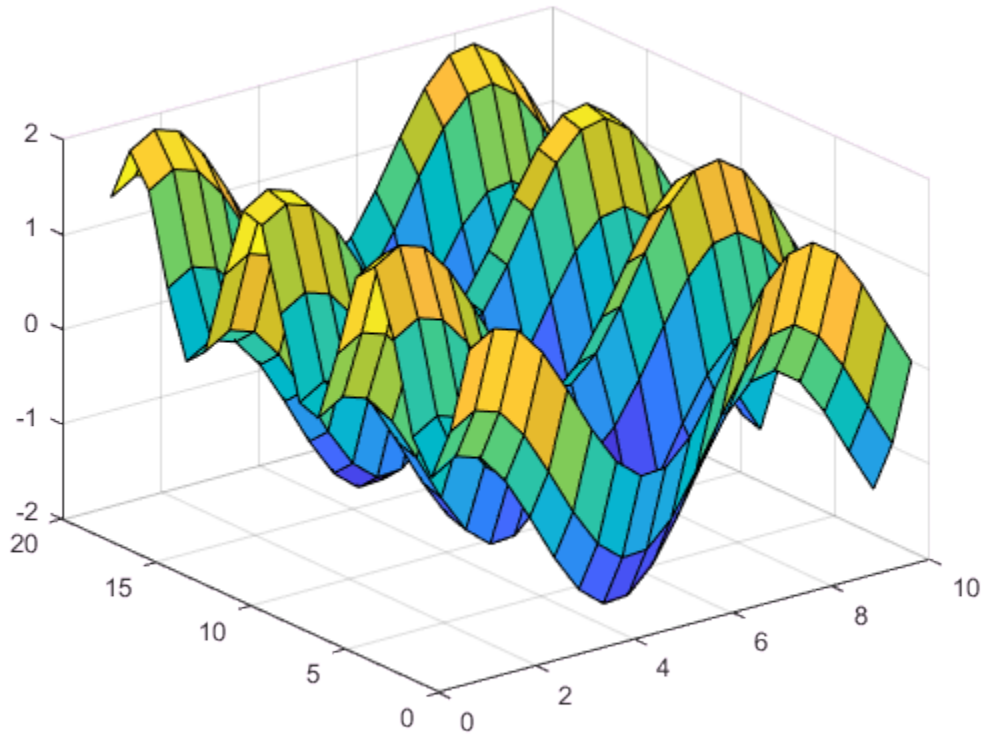

Specify Colormap Colors for Surface Plot

Specify the colors for a surface plot by including a fourth matrix input, `C`. Use colormap colors by specifying `C` as a matrix the same size as `Z`. Add a colorbar to the graph to show how the data values in `C` map to the colors in the colormap.

```
[X,Y] = meshgrid(1:0.5:10,1:20);
Z = sin(X) + cos(Y);
C = X.*Y;
surf(X,Y,Z,C)
colorbar
```

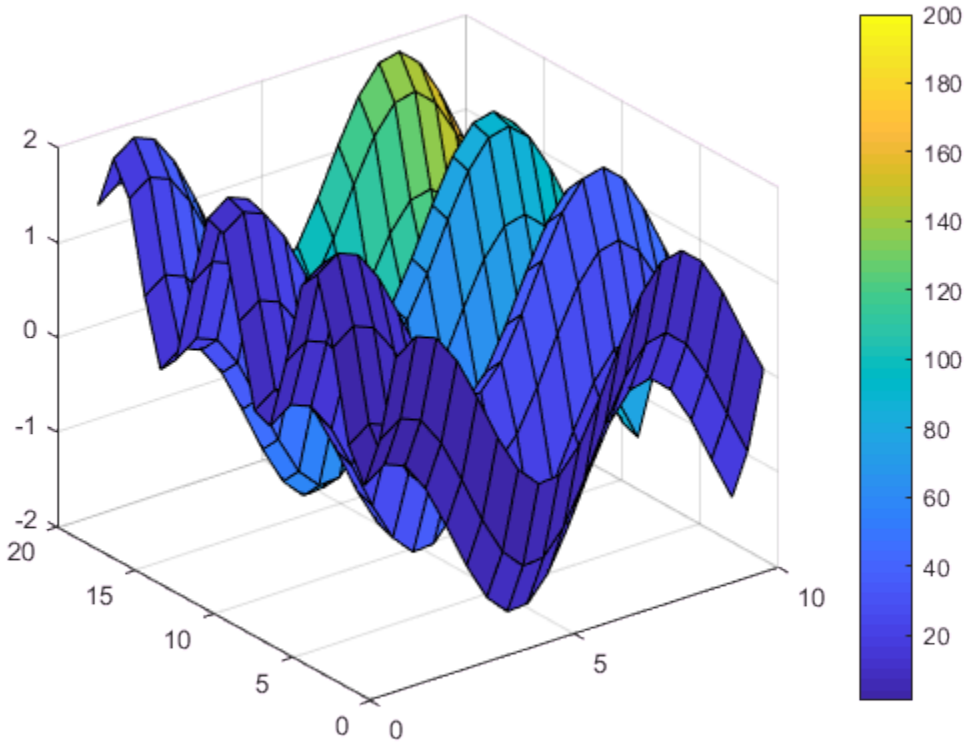

Specify True Colors for Surface Plot

Specify the colors for a surface plot by including a fourth matrix input, `C0`. Use true colors by creating `C0` as an m-by-n-by-3 array of RGB triplet values, where `Z` is m-by-n. The first page of the array indicates the red component for each color; the second page indicates the green component; and the third page indicates the blue component.

```
[X,Y,Z] = peaks(25);
C0(:,:,1) = zeros(25); % red
C0(:,:,2) = ones(25).*linspace(0.5,0.6,25); % green
C0(:,:,3) = ones(25).*linspace(0,1,25); % blue
surf(X,Y,Z,C0)
```

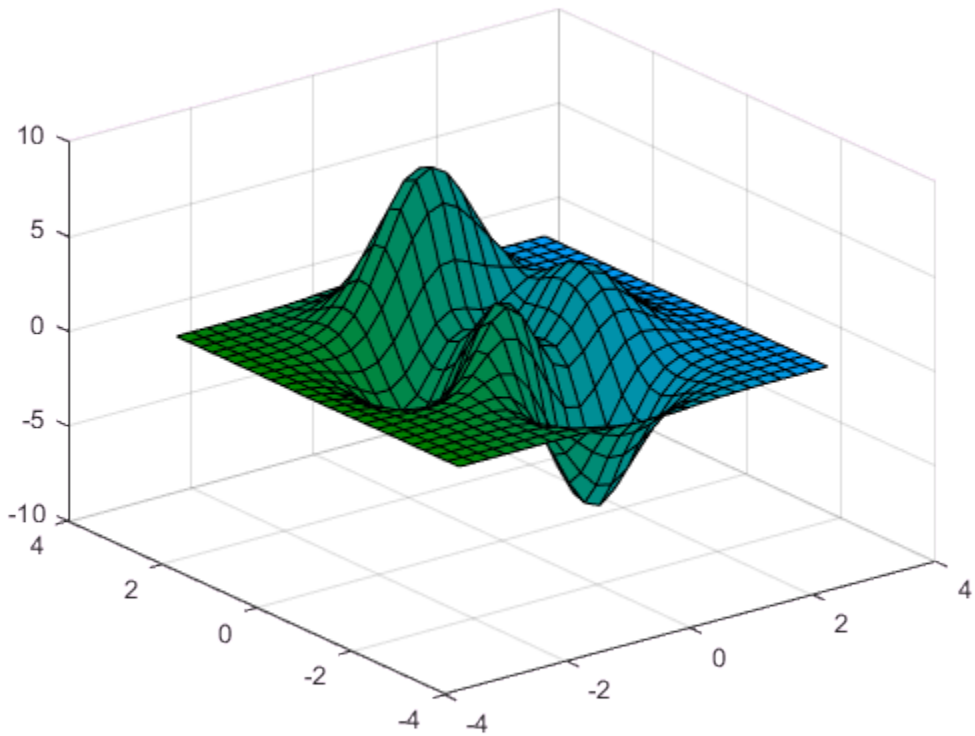

Modify Surface Plot Appearance

Create a semitransparent surface by setting the `FaceAlpha` property as a name-value pair argument. Assign the surface object to the variable `s`.

```
[X,Y] = meshgrid(-5:.5:5);
Z = Y.*sin(X) - X.*cos(Y);
s = surf(X,Y,Z,'FaceAlpha',0.5)
```

```
s = 
  Surface with properties:

       EdgeColor: [0 0 0]
       LineStyle: '-'
       FaceColor: 'flat'
    FaceLighting: 'flat'
       FaceAlpha: 0.5000
           XData: [21×21 double]
           YData: [21×21 double]
           ZData: [21×21 double]
           CData: [21×21 double]

  Show all properties
```

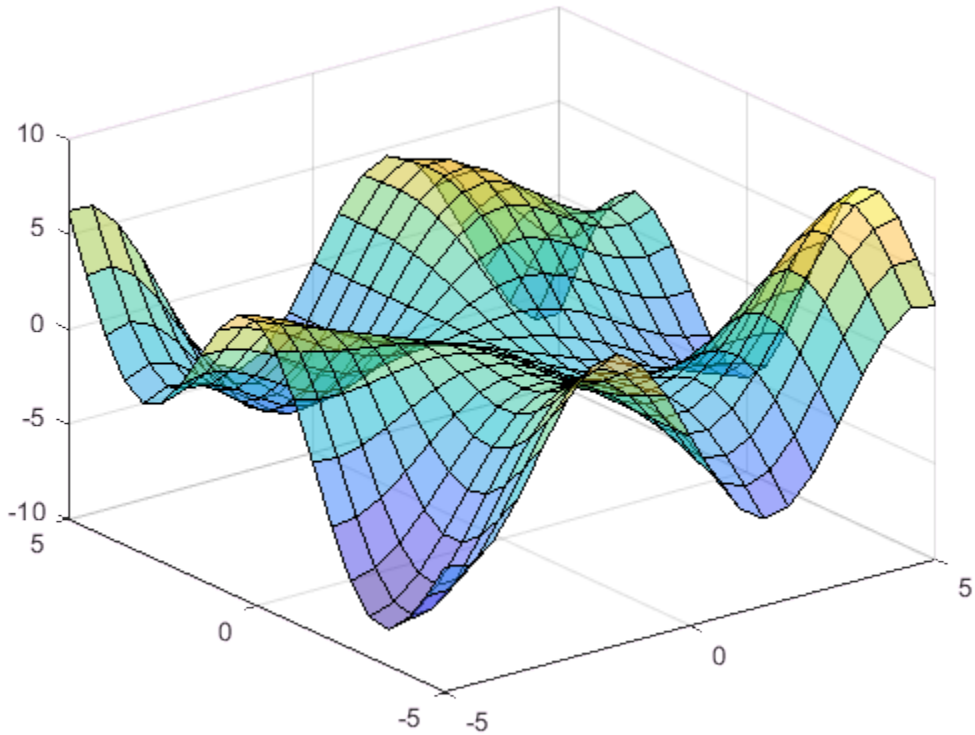

Use `s` to access and modify properties of the surface object after it is created. For example, turn off the display of the edges by setting the `EdgeColor` property.

```
s.EdgeColor = 'none';
```

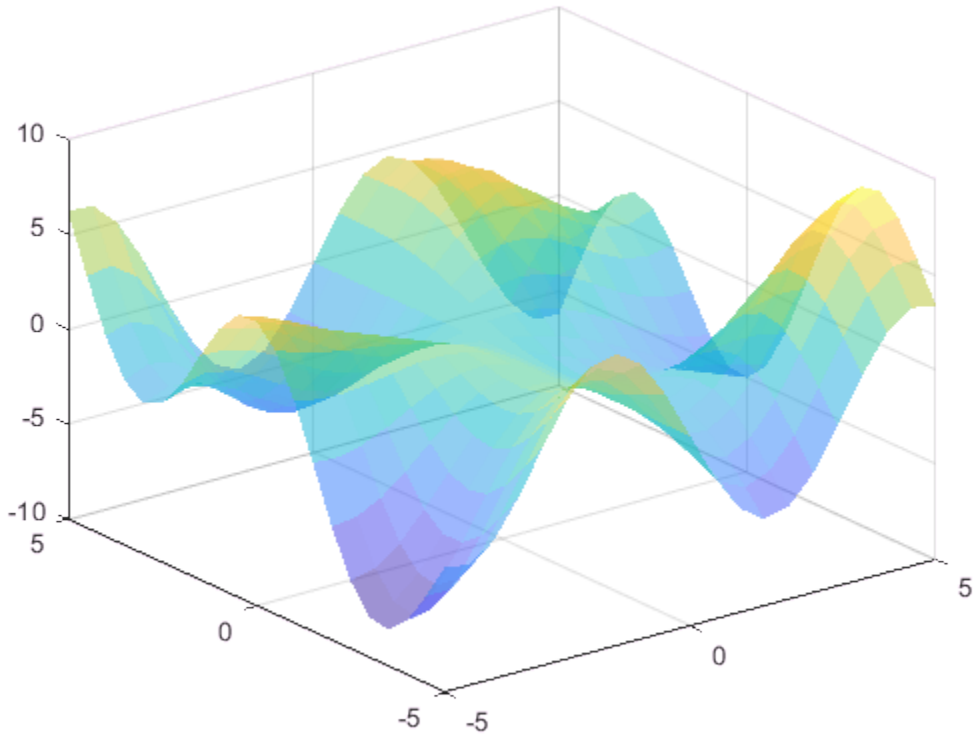

- "Plot Dates and Durations"
- "Plot Categorical Data"

Input Arguments

X — *x* coordinates

matrix | vector

x coordinates, specified as a matrix the same size as `Z` or as a vector with length `n`, where `[m,n] = size(Z)`. To create a matrix for arbitrary domains, use the `meshgrid` function.

The `XData` property of the surface object stores the *x* values.

Example: `[X,Y] = meshgrid(-5:0.5:5)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`Y` — *y* coordinates
matrix | vector

y coordinates, specified as a matrix the same size as `Z` or as a vector with length `m`, where `[m,n] = size(Z)`. To create a matrix for arbitrary domains, use the `meshgrid` function.

The `YData` property of the surface object stores the *y* values.

Example: `[X,Y] = meshgrid(-5:0.5:5)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`Z` — *z* coordinates
matrix

z coordinates, specified as a matrix. If you do not specify the colors, then `Z` also sets the surface colors.

The `ZData` property of the surface object stores the *z* values.

Example: `Z = [1 2 3; 4 5 6]`

Example: `Z = sin(x) + cos(y)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`C` — Color for each vertex
matrix | `m`-by-`n`-by-`3` array of RGB triplets

Color for each vertex, specified as a matrix the same size as `Z` or as an `m`-by-`n`-by-`3` array of RGB triplets, where `Z` is `m`-by-`n`.

- If you want to use colormap colors, then specify `C` as a matrix. The `CDataMapping` property of the surface object controls how the values in `C` map to colors in the colormap.
- If you want to use true colors, then specify `C` as an array of RGB triplets.

The `CData` property of the surface object stores the color data. For additional control over the surface coloring, use the `FaceColor` and `EdgeColor` properties.

`ax` — Axes in which to plot

axes object

Axes in which to plot, specified as an axes object. If you do not specify the axes, then `surf` plots into the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Note: The properties listed here are only a subset. For a full list, see Chart Surface Properties.

Example: `surf(X,Y,Z,'FaceAlpha',0.5,'EdgeColor','none')` creates a semitransparent surface with no edges drawn.

`'EdgeColor'` — Edge line color

`[0 0 0]` (default) | `'none'` | `'flat'` | `'interp'` | RGB triplet | character vector of color name

Edge line color, specified as one of the values listed here. The default color of `[0 0 0]` corresponds to black edges.

Value	Description
`'none'`	Do not draw the edges.
`'flat'`	Use a different color for each edge based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color value at the first vertex of each face (in the positive *x* and *y* directions) determines the color for the adjacent edges. You cannot use

Value	Description
	this value when the `EdgeAlpha` property is set to `'interp'`.
`'interp'`	Use interpolated coloring for each edge based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color varies across each edge by linearly interpolating the color values at the vertices. You cannot use this value when the `EdgeAlpha` property is set to `'flat'`. 

Value	Description
RGB triplet or color name	Use the specified color for all the edges. This option does not use the color values in the `CData` property. 

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`'LineStyle'` — Line style

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style, specified as one of the line styles listed in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	No line	No line

`'FaceColor'` — Face color

`'flat'` (default) | `'interp'` | `'none'` | `'texturemap'` | RGB triplet | character vector of color name

Face color, specified as one of the values in this table.

Value	Description
`'flat'`	Use a different color for each face based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color value at the first vertex of each face (in the positive *x* and *y* directions) determines the color for the entire face. You cannot use this value when the `FaceAlpha` property is set to `'interp'`. 

Value	Description
`'interp'`	Use interpolated coloring for each face based on the values in the `CData` property. First you must specify the `CData` property as a matrix the same size as `ZData`. The color varies across each face by bilinearly interpolating the color values at the vertices. You cannot use this value when the `FaceAlpha` property is set to `'flat'`. 
RGB triplet or color name	Use the specified color for all the faces. This option does not use the color values in the `CData` property. 
`'texturemap'`	Transform the color data in `CData` so that it conforms to the surface.
`'none'`	Do not draw the faces.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`'FaceAlpha'` — Face transparency

1 (default) | scalar in range `[0,1]` | `'flat'` | `'interp'` | `'texturemap'`

Face transparency, specified as one of these values:

- Scalar in range `[0,1]` — Use uniform transparency across all the faces. A value of `1` is fully opaque and `0` is completely transparent. Values between `0` and `1` are semitransparent. This option does not use the transparency values in the `AlphaData` property.
- `'flat'` — Use a different transparency for each face based on the values in the `AlphaData` property. The transparency value at the first vertex determines the transparency for the entire face. First you must specify the `AlphaData` property as a matrix the same size as the `ZData` property. The `FaceColor` property also must be set to `'flat'`.
- `'interp'` — Use interpolated transparency for each face based on the values in `AlphaData` property. The transparency varies across each face by interpolating the values at the vertices. First you must specify the `AlphaData` property as a matrix the same size as the `ZData` property. The `FaceColor` property also must be set to `'interp'`.
- `'texturemap'` — Transform the data in `AlphaData` so that it conforms to the surface.

`'FaceLighting'` — Effect of light objects on faces

`'flat'` (default) | `'gouraud'` | `'none'`

Effect of light objects on faces, specified as one of these values:

- `'flat'` — Apply light uniformly across each face. Use this value to view faceted objects.
- `'gouraud'` — Vary the light across the faces. Calculate the light at the vertices and then linearly interpolate the light across the faces. Use this value to view curved surfaces.
- `'none'` — Do not apply light from light objects to the faces.

To add a light object to the axes, use the `light` function.

Note: The `'phong'` value has been removed. Use `'gouraud'` instead.

See Also

See Also

Functions

`colormap` | `imagesc` | `mesh` | `meshgrid` | `pcolor` | `shading` | `view`

Properties

Chart Surface Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

surfc

Contour plot under a 3-D shaded surface plot



Syntax

```
surfc(Z)
surfc(Z,C)
surfc(X,Y,Z)
surfc(X,Y,Z,C)
surfc(...,'PropertyName',PropertyValue)
surfc(axes_handles,...)
h = surfc(...)
```

Description

`surfc(Z)` creates a contour plot under the three-dimensional shaded surface from the *z* components in matrix `Z`, using `x = 1:n` and `y = 1:m`, where `[m,n] = size(Z)`. The height, `Z`, is a single-valued function defined over a geometrically rectangular grid. `Z` specifies the color data, as well as surface height, so color is proportional to surface height.

`surfc(Z,C)` plots the height of `Z`, a single-valued function defined over a geometrically rectangular grid, and uses matrix `C`, assumed to be the same size as `Z`, to color the surface.

`surfc(X,Y,Z)` uses `Z` for the color data and surface height. `X` and `Y` are vectors or matrices defining the `x` and `y` components of a surface. If `X` and `Y` are vectors, `length(X) = n` and `length(Y) = m`, where `[m,n] = size(Z)`. In this case, the vertices of the surface faces are *(X(j), Y(i), Z(i,j))* triples. To create X and Y matrices for arbitrary domains, use the `meshgrid` function.

`surfc(X,Y,Z,C)` uses `C` to define color. MATLAB performs a linear transformation on this data to obtain colors from the current colormap.

`surfc(...,'PropertyName',PropertyValue)` specifies surface properties along with the data.

`surfc(axes_handles,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = surfc(...)` returns handles to a chart surface and a contour object.

Examples

Display Contour Plot Under Surface Plot

Display a contour plot under a surface plot of the `peaks` function.

```
[X,Y,Z] = peaks(30);
figure
surfc(X,Y,Z)
```

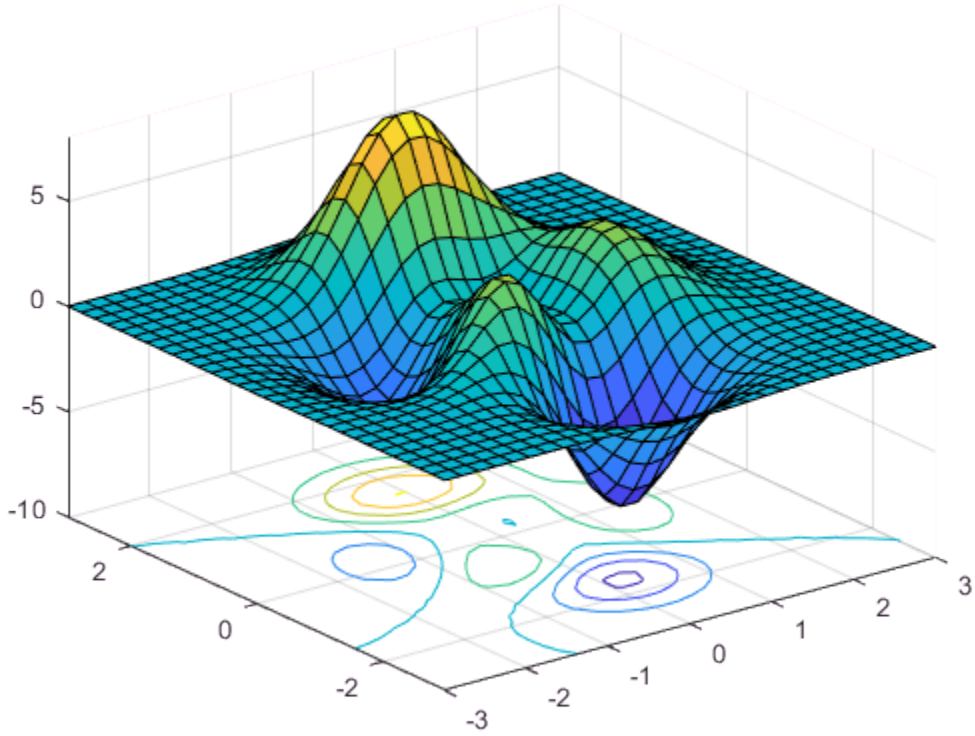

Tips

`surfc` does not accept complex inputs.

Algorithms

Consider a parametric surface parameterized by two independent variables, `i` and `j`, which vary continuously over a rectangle; for example, $1 \le i \le m$ and $1 \le j \le n$. The three functions `x(i,j)`, `y(i,j)`, and `z(i,j)` specify the surface. When `i` and `j` are integer

values, they define a rectangular grid with integer grid points. The functions `x(i,j)`, `y(i,j)`, and `z(i,j)` become three `m`-by-`n` matrices, `X`, `Y`, and `Z`. Surface color is a fourth function, `c(i,j)`, denoted by matrix `C`.

Each point in the rectangular grid can be thought of as connected to its four nearest neighbors.

```
       i-1,j
         |
i,j-1 - i,j - i,j+1
         |
       i+1,j
```

This underlying rectangular grid induces four-sided patches on the surface. To express this another way, `[X(:) Y(:) Z(:)]` returns a list of triples specifying points in 3-D space. Each interior point is connected to the four neighbors inherited from the matrix indexing. Points on the edge of the surface have three neighbors. The four points at the corners of the grid have only two neighbors. This defines a mesh of quadrilaterals or a *quad-mesh*.

You can specify surface color in two different ways: at the vertices or at the centers of each patch. In this general setting, the surface need not be a single-valued function of `x` and `y`. Moreover, the four-sided surface patches need not be planar. For example, you can have surfaces defined in polar, cylindrical, and spherical coordinate systems.

The `shading` function sets the shading. If the shading is `interp`, `C` must be the same size as `X`, `Y`, and `Z`; it specifies the colors at the vertices. The color within a surface patch is a bilinear function of the local coordinates. If the shading is `faceted` (the default) or `flat`, `C(i,j)` specifies the constant color in the surface patch:

```
 (i,j)   -   (i,j+1)
   |   C(i,j)  |
(i+1,j)  -  (i+1,j+1)
```

In this case, `C` can be the same size as `X`, `Y`, and `Z` and its last row and column are ignored. Alternatively, its row and column dimensions can be one less than those of `X`, `Y`, and `Z`.

The `surfc` function specifies the viewpoint using `view(3)`.

The range of `X`, `Y`, and `Z` or the current setting of the axes `XLimMode`, `YLimMode`, and `ZLimMode` properties (also set by the `axis` function) determines the axis labels.

The range of `C` or the current setting of the axes `CLim` and `CLimMode` properties (also set by the `caxis` function) determines the color scaling. The scaled color values are used as indices into the current colormap.

See Also

See Also

Functions

`axis` | `caxis` | `colormap` | `contour` | `delaunay` | `imagesc` | `mesh` | `meshgrid` | `pcolor` | `shading` | `surf` | `trisurf` | `view`

Properties

Chart Surface Properties | Contour Properties

Topics

Representing a Matrix as a Surface

Introduced before R2006a

surf2patch

Convert surface data to patch data

Syntax

```
fvc = surf2patch(h)
fvc = surf2patch(Z)
fvc = surf2patch(Z,C)
fvc = surf2patch(X,Y,Z)
fvc = surf2patch(X,Y,Z,C)
fvc = surf2patch(...,'triangles')
[f,v,c] = surf2patch(...)
```

Description

`fvc = surf2patch(h)` converts the geometry and color data from the `surface` object, `h`, into patch format. The output, `fvc`, is a structure containing the face, vertex, and color data. You can pass this structure directly to the `patch` command.

`fvc = surf2patch(Z)` calculates the patch data from the surface's `ZData` matrix `Z`.

`fvc = surf2patch(Z,C)` calculates the patch data from the surface's `ZData` and `CData` matrices `Z` and `C`.

`fvc = surf2patch(X,Y,Z)` calculates the patch data from the surface's `XData`, `YData`, and `ZData` matrices `X`, `Y`, and `Z`.

`fvc = surf2patch(X,Y,Z,C)` calculates the patch data from the surface's `XData`, `YData`, `ZData`, and `CData` matrices `X`, `Y`, `Z`, and `C`.

`fvc = surf2patch(...,'triangles')` creates triangular faces instead of the quadrilaterals that compose surfaces.

`[f,v,c] = surf2patch(...)` returns the face, vertex, and color data in the three arrays `f`, `v`, and `c` instead of a struct.

Examples

Calculate Patch Data from Surface Data

Use the `sphere` command to generate the `XData`, `YData`, and `ZData` of a surface. Then, calculate the patch data. Pass the `ZData` (z) to `surf2patch` as both the third and fourth arguments - the third argument is the `ZData` and the fourth argument is taken as the `CData`. You must do this since the `patch` command does not automatically use the z-coordinate data for the color data, as does the surface command.

Since patch is a low-level command, you must set the view and shading to produce the same results produced by the `surf` command.

```
[x,y,z] = sphere;
figure
patch(surf2patch(x,y,z,z));
shading faceted;
view(3)
```

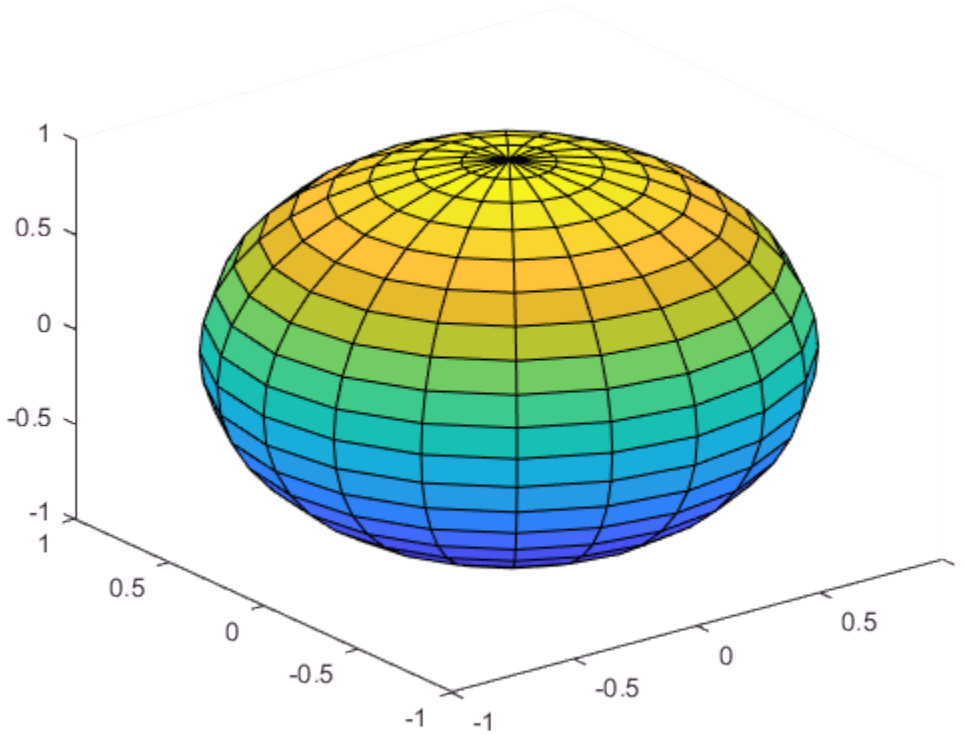

Calculate Patch Data Using Surface Object

Calculate face, vertex, and color data from a surface whose handle has been passed as an argument.

```
figure
s = surf(peaks);
patch(surf2patch(s));
delete(s)
shading faceted;
view(3)
```

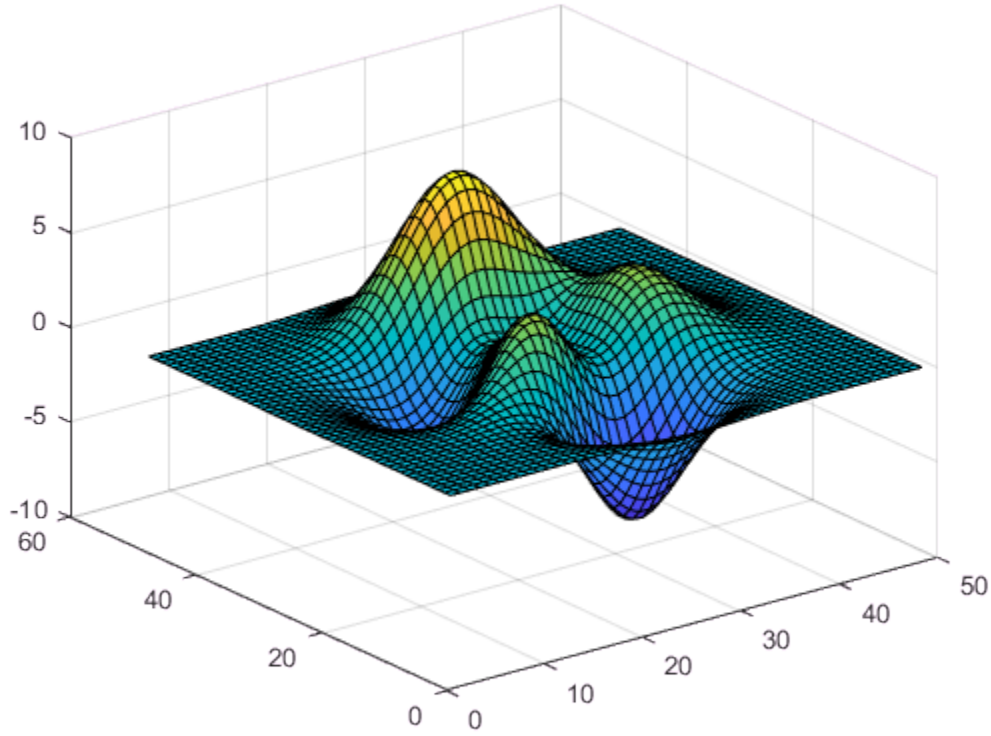

See Also

`patch` | `reducepatch` | `shrinkfaces` | `surface` | `surf`

Introduced before R2006a

surface

Create surface object

Syntax

```
surface(Z)
surface(Z,C)
surface(X,Y,Z)
surface(X,Y,Z,C)
surface(x,y,Z)
surface(...'PropertyName',PropertyValue,...)
surface(ax,...)
h = surface(...)
```

Properties

For a list of properties, see Primitive Surface Properties.

Description

`surface` is the low-level function for creating surface graphics objects. Surfaces are plots of matrix data created using the row and column indices of each element as the *x*- and *y*-coordinates and the value of each element as the *z*-coordinate.

`surface(Z)` plots the surface specified by the matrix `Z`. Here, `Z` is a single-valued function, defined over a geometrically rectangular grid. The values in `Z` can be numeric, datetime, duration, or categorical values.

`surface(Z,C)` plots the surface specified by `Z` and colors it according to the data in `C` (see "Examples").

`surface(X,Y,Z)` uses `C = Z`, so color is proportional to surface height above the *x*-*y* plane.

`surface(X,Y,Z,C)` plots the parametric surface specified by `X`, `Y`, and `Z`, with color specified by `C`. The values in `X`, `Y`, and `Z` can be numeric, datetime, duration, or categorical values.

`surface(x,y,Z)`, `surface(x,y,Z,C)` replaces the first two matrix arguments with vectors and must have `length(x) = n` and `length(y) = m` where `[m,n] = size(Z)`. In this case, the vertices of the surface facets are the triples `(x(j),y(i),Z(i,j))`. Note that `x` corresponds to the columns of `Z` and `y` corresponds to the rows of `Z`. For a complete discussion of parametric surfaces, see the `surf` function. The values in `x`, `y`, and `Z` can be numeric, datetime, duration, or categorical values.

`surface(...'PropertyName',PropertyValue,...)` follows the `X`, `Y`, `Z`, and `C` arguments with property name/property value pairs to specify additional surface properties. For a description of the properties, see Primitive Surface Properties.

`surface(ax,...)` creates the surface in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = surface(...)` returns a primitive surface object.

Examples

Create Surface Plot

Plot the function $z = xe^{-x^2-y^2}$ on the domain $-2 \le x \le 2$ and $-2 \le y \le 2$. Use `meshgrid` to define `X` and `Y`. Then, define `Z` and create a surface plot. Change the view of the plot using `view`.

```
[X,Y] = meshgrid(-2:0.2:2,-2:0.2:2);
Z = X.*exp(-X.^2 - Y.^2);
figure
surface(X,Y,Z)
view(3)
```

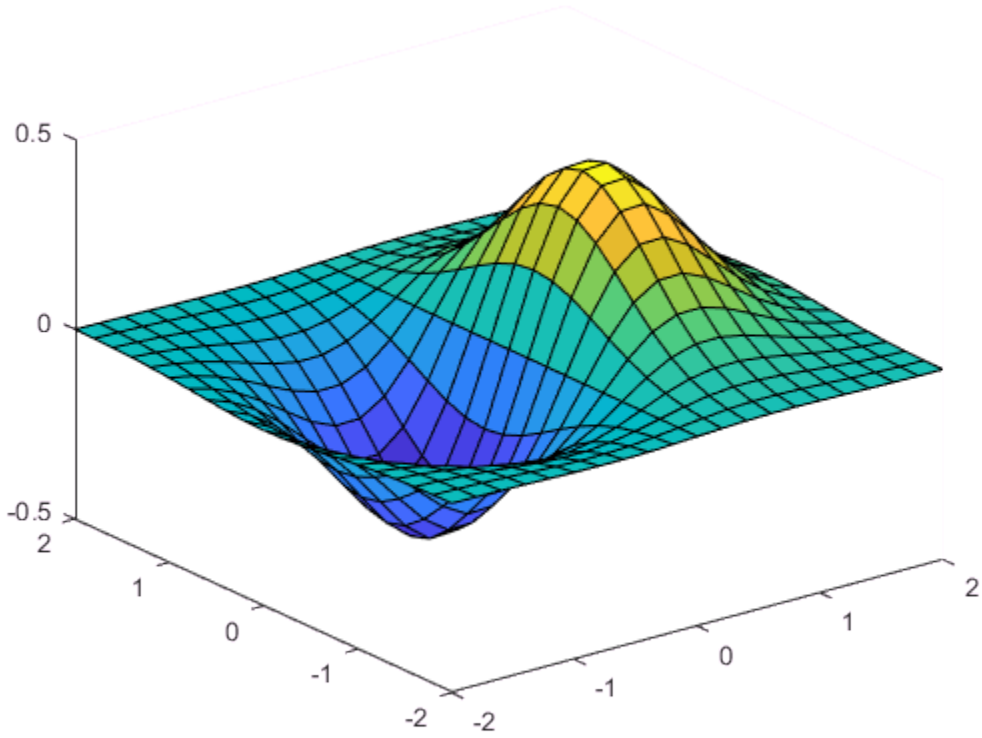

`surface` creates the plot from corresponding values in `X`, `Y`, and `Z`. If you do not define the color data `C`, then `surface` uses `Z` to determine the color, so color is proportional to surface height.

Display Image Along Surface Plot

Use the `peaks` function to define `XD`, `YD`, and `ZD` as 25-by-25 matrices.

```
[XD,YD,ZD] = peaks(25);
```

Load the `clown` data set to get the image data `X` and its associated colormap, `map`. Flip `X` using the `flipud` function and define the flipped image as the color data for the surface, `C`.

```
load clown
C = flipud(X);
```

Create a surface plot and display the image along the surface. Since the surface data `ZD` and the color data `C` have different dimensions, you must set the surface `FaceColor` to `'texturemap'`.

```
figure
surface(XD,YD,ZD,C,...
    'FaceColor','texturemap',...
    'EdgeColor','none',...
    'CDataMapping','direct')
colormap(map)
view(-35,45)
```

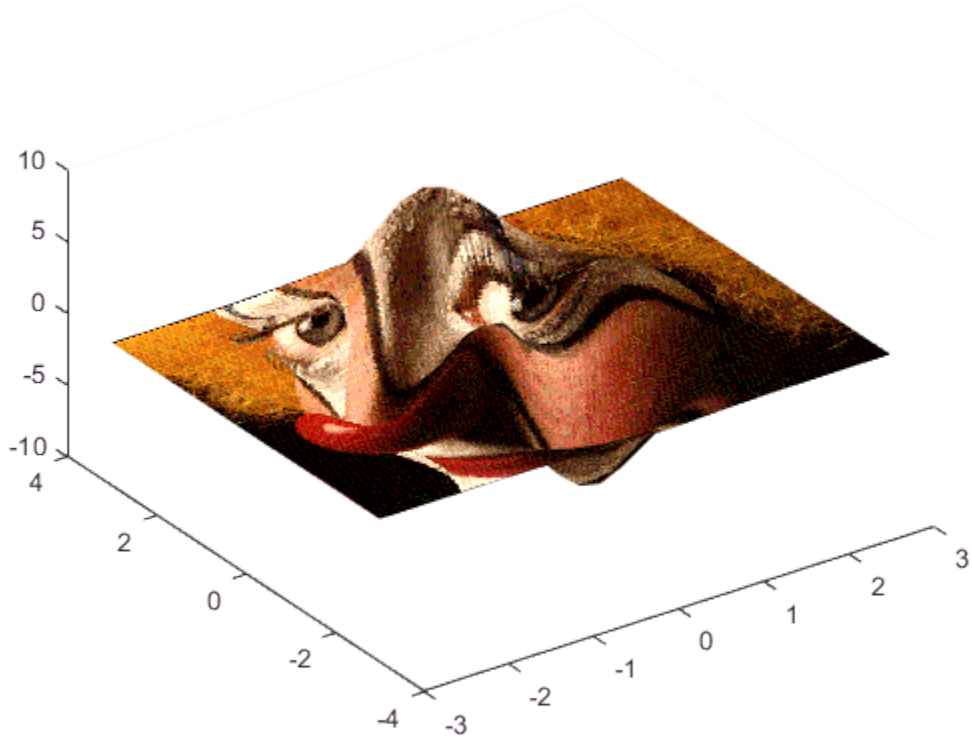

The clown data is typically viewed with the `image` function, which uses `'ij'` axis numbering. This example reverses the image data in the vertical direction using `flipud`.

- "Plot Dates and Durations"
- "Plot Categorical Data"

Tutorials

For examples, see Representing a Matrix as a Surface.

Tips

`surface` does not respect the settings of the figure and axes NextPlot properties. It simply adds the surface object to the current axes.

If you do not specify separate color data (`C`), MATLAB uses the matrix (`Z`) to determine the coloring of the surface. In this case, color is proportional to values of `Z`. You can specify a separate matrix to color the surface independently of the data defining the area of the surface.

You can specify properties as property name/property value pairs or using dot notation.

`surface` provides convenience forms that allow you to omit the property name for the `XData`, `YData`, `ZData`, and `CData` properties. For example,

```
surface('XData',X,'YData',Y,'ZData',Z,'CData',C)
```

is equivalent to

```
surface(X,Y,Z,C)
```

When you specify only a single matrix input argument,

```
surface(Z)
```

MATLAB assigns the data properties as if you specified

```
surface('XData',[1:size(Z,2)],...
   'YData',[1:size(Z,1)],...
```

```
'ZData',Z,...
'CData',Z)
```

The `axis`, `caxis`, `colormap`, `hold`, `shading`, and `view` commands set graphics properties that affect surfaces. You can also set and query surface property values after creating them using dot notation.

See Also

See Also

Functions

`ColorSpec` | `patch` | `pcolor` | `surf`

Properties

Primitive Surface Properties

Topics

"Plot Dates and Durations"
"Plot Categorical Data"

Introduced before R2006a

surfl

Surface plot with colormap-based lighting

Syntax

```
surfl(Z)
surfl(...,'light')
surfl(...,s)
surfl(X,Y,Z,s,k)
surfl(ax,...)
h = surfl(...)
```

Description

The surfl function displays a shaded surface based on a combination of ambient, diffuse, and specular lighting models.

`surfl(Z)` and `surfl(X,Y,Z)` create three-dimensional shaded surfaces using the default direction for the light source and the default lighting coefficients for the shading model. `X`, `Y`, and `Z` are vectors or matrices that define the *x*, *y*, and *z* components of a surface.

`surfl(...,'light')` produces a colored, lighted surface using a MATLAB light object. This produces results different from the default lighting method, `surfl(...,'cdata')`, which changes the color data for the surface to be the reflectance of the surface.

`surfl(...,s)` specifies the direction of the light source. `s` is a two- or three-element vector that specifies the direction from a surface to a light source. `s = [sx sy sz]` or `s = [azimuth elevation]`. The default `s` is 45° counterclockwise from the current view direction.

`surfl(X,Y,Z,s,k)` specifies the reflectance constant. `k` is a four-element vector defining the relative contributions of ambient light, diffuse reflection, specular reflection, and the specular shine coefficient. `k = [ka kd ks shine]` and defaults to `[.55,.6,.4,10]`.

`surfl(ax,...)` creates the surface in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = surfl(...)` returns the chart surface object. If you specify the `'light'` option, then `h` contains both the surface and the light objects.

Examples

Create Surface Plot With Colormap-Based Lighting

Create a surface plot of the `peaks` function using colormap-based lighting. Set the `shading` to `interp` to interpolate the colors across lines and faces.

```
[x,y] = meshgrid(-3:1/8:3);
z = peaks(x,y);
surfl(x,y,z)
shading interp
```

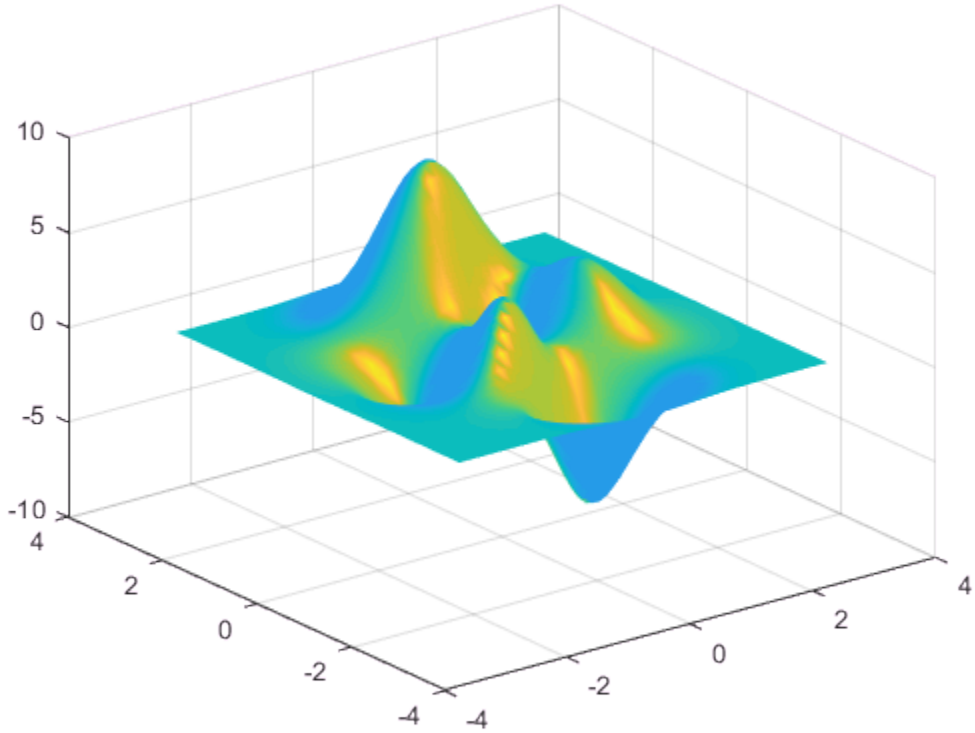

Tips

`surfl` does not accept complex inputs.

For smoother color transitions, use colormaps that have linear intensity variations (e.g., `gray`, `copper`, `bone`, `pink`).

The ordering of points in the `X`, `Y`, and `Z` matrices defines the inside and outside of parametric surfaces. If you want the opposite side of the surface to reflect the light source, use `surfl(X',Y',Z')`. Because of the way surface normal vectors are computed, `surfl` requires matrices that are at least 3-by-3.

See Also

`colormap` | `light` | `shading`

Introduced before R2006a

surfnorm

Compute and display 3-D surface normals

Syntax

```
surfnorm(Z)
surfnorm(X,Y,Z)
surfnorm(axes_handle, ___ )
surfnorm( ___ ,Name,Value)
[Nx,Ny,Nz] = surfnorm( ___ )
```

Description

`surfnorm(Z)` plots a surface of the matrix `Z` with `surf` and displays its surface normals as radiating vectors.

`surfnorm(X,Y,Z)` plots a surface and its surface normals from the vectors or matrices `X`, `Y`, and matrix `Z`. `X`, `Y`, and `Z` must be the same size.

`surfnorm(axes_handle, ___ )` plots into `axes_handle` instead of `gca` and it can include any of the input arguments in previous syntaxes.

`surfnorm( ___ ,Name,Value)` can be used to set the value of the specified Chart Surface Properties properties.

`[Nx,Ny,Nz] = surfnorm( ___ )` returns the components of the 3-D surface normals for the surface without plotting the surface or surface normals.

Input Arguments

Z

2–D array of real numbers representing a surface

Default:

X

2–D array of real numbers that defines the *x* component of the surface grid

Y

2–D array of real numbers that defines the *y* component of the surface grid

axes_handle

Handle to the target axes in which to plot the surface

If you do not specify `axes_handle`, MATLAB uses current axes.

Name,Value

Specify optional comma-separated pairs of Name,Value arguments, where Name is the argument name and Value is the corresponding value. Name must appear inside single quotes (' '). You can specify several name and value pair arguments in any order as Name1,Value1,...,NameN,ValueN.

Property names and values of the surface object

See Chart Surface Properties for description of property names and values.

Output Arguments

[Nx,Ny,Nz]

x, *y*, and *z* components of the three-dimensional surface normals for the surface

Examples

Display 3-D Surface Normals for Cone Plot

Compute and plot the normal vectors for a truncated cone. Set the axis limits using the `axis` function.

```
[x,y,z] = cylinder(1:10);
figure
surfnorm(x,y,z)
```

```
axis([-12 12 -12 12 -0.1 1])
```

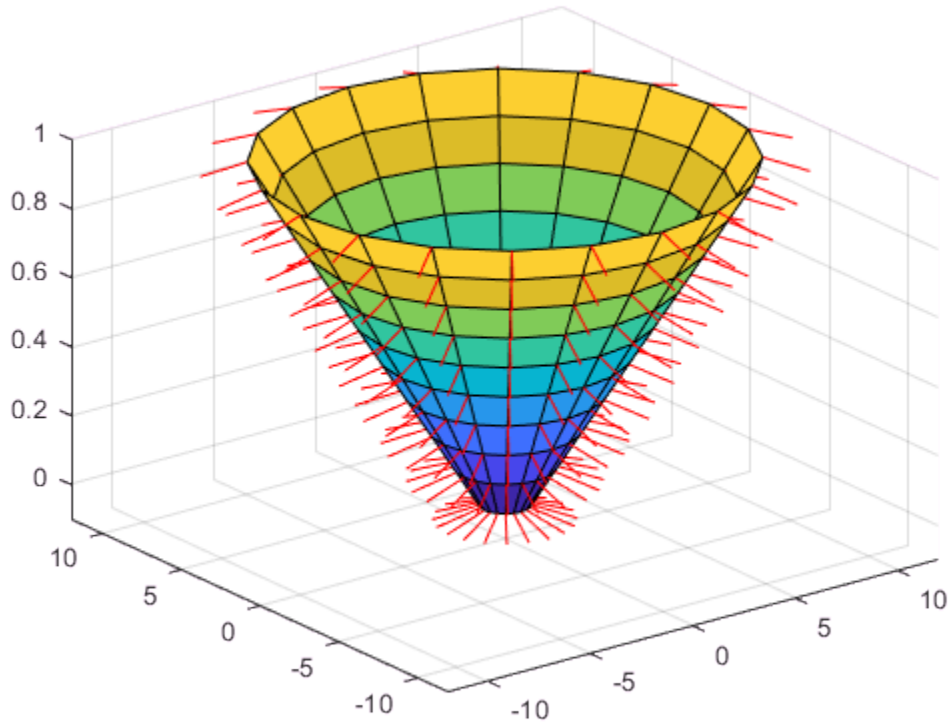

Use Computed Surface Normals for Lighting

Compute the normal vectors of an expression representing a surface.

```
[nx, ny, nz] = surfnorm(peaks);
```

Assign these normals to the `VertexNormals` property which MATLAB® uses to calculate the surface lighting. Set the lighting algorithm to `gouraud` and add a light using `camlight`.

```
b = reshape([nx ny nz], 49,49,3);
```

```
figure
surf(ones(49),'VertexNormals',b,'EdgeColor','none');
lighting gouraud
camlight
```

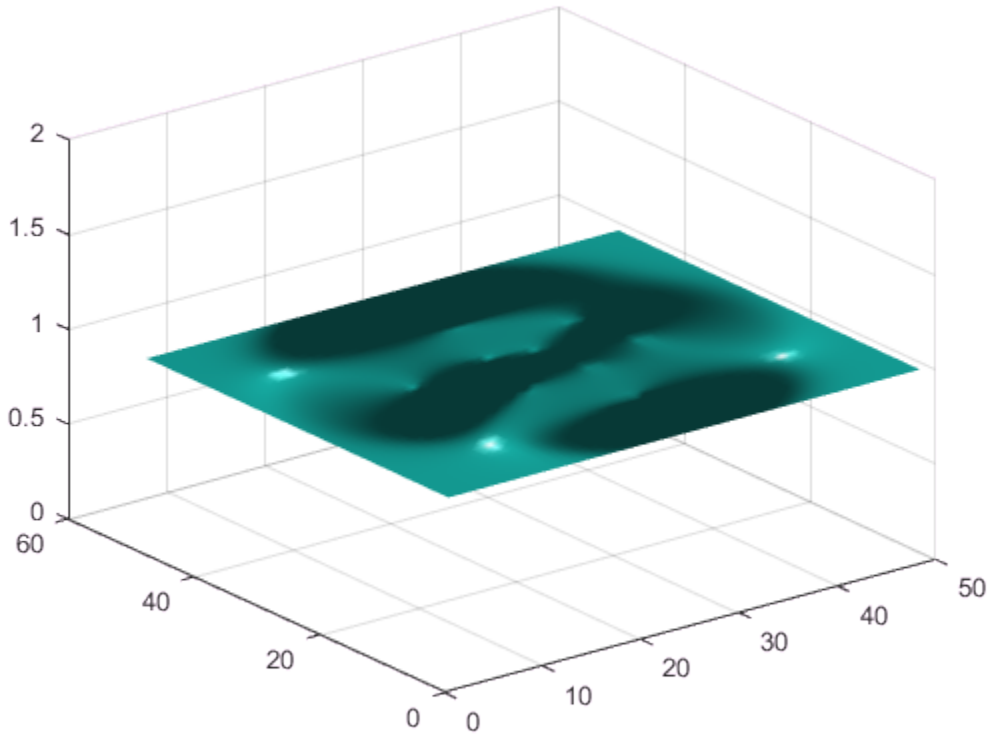

Definitions

Surface Normal

An imaginary line perpendicular to a flat surface or perpendicular to the tangent plane at a point on a non-flat surface

Tips

- `surfnorm` does not accept complex inputs.
- Reverse the direction of the normals by calling `surfnorm` with transposed arguments:

  ```
  surfnorm(X',Y',Z')
  ```
- The surface normals represent conditions at vertices and are not normalized. Normals for surface elements that face away from the viewer do not display.
- `surfl` uses `surfnorm` to compute surface normals when calculating the reflectance of a surface.

Algorithms

After performing a bicubic fit of the data in the *x*, *y*, and *z* directions, diagonal vectors are computed and crossed to form the normal at each vertex.

See Also

`surf` | `quiver3` | `surface` | `isonormals` | `surfl`

Topics

Introduced before R2006a

svd

Singular value decomposition

Syntax

```
s = svd(A)

[U,S,V] = svd(A)
[U,S,V] = svd(A,'econ')
[U,S,V] = svd(A,0)
```

Description

`s = svd(A)` returns the singular values of matrix `A` in descending order.

`[U,S,V] = svd(A)` performs a singular value decomposition of matrix `A`, such that `A = U*S*V'`.

`[U,S,V] = svd(A,'econ')` produces an economy-size decomposition of `m`-by-`n` matrix `A`:

- `m > n` — Only the first `n` columns of `U` are computed, and `S` is `n`-by-`n`.
- `m = n` — `svd(A,'econ')` is equivalent to `svd(A)`.
- `m < n` — Only the first `m` columns of `V` are computed, and `S` is `m`-by-`m`.

The economy-size decomposition removes extra rows or columns of zeros from the diagonal matrix of singular values, `S`, along with the columns in either `U` or `V` that multiply those zeros in the expression `A = U*S*V'`. Removing these zeros and columns can improve execution time and reduce storage requirements without compromising the accuracy of the decomposition.

`[U,S,V] = svd(A,0)` produces a different economy-size decomposition of `m`-by-`n` matrix `A`:

- `m > n` — `svd(A,0)` is equivalent to `svd(A,'econ')`.

- `m <= n` — `svd(A,0)` is equivalent to `svd(A)`.

Examples

Singular Values of Matrix

Compute the singular values of a full rank matrix.

```
A = [1 0 1; -1 -2 0; 0 1 -1]
```

```
A =

     1     0     1
    -1    -2     0
     0     1    -1
```

```
s = svd(A)
```

```
s =

    2.4605
    1.6996
    0.2391
```

Singular Value Decomposition

Find the singular value decomposition of a rectangular matrix A.

```
A = [1 2; 3 4; 5 6; 7 8]
```

```
A =

     1     2
     3     4
     5     6
     7     8
```

```
[U,S,V] = svd(A)
```

```
U =
```

```
   -0.1525   -0.8226   -0.3945   -0.3800
   -0.3499   -0.4214    0.2428    0.8007
   -0.5474   -0.0201    0.6979   -0.4614
   -0.7448    0.3812   -0.5462    0.0407


S =

   14.2691         0
         0    0.6268
         0         0
         0         0


V =

   -0.6414    0.7672
   -0.7672   -0.6414
```

Confirm the relation `A = U*S*V'`, within machine precision.

```
U*S*V'

ans =

    1.0000    2.0000
    3.0000    4.0000
    5.0000    6.0000
    7.0000    8.0000
```

Economy-Size Decomposition

Calculate the full and economy-size decompositions of a rectangular matrix.

```
A = [1 2; 3 4; 5 6; 7 8]

A =

     1     2
     3     4
     5     6
```

```
     7     8
```

```
[U,S,V] = svd(A)
```

```
U =

   -0.1525   -0.8226   -0.3945   -0.3800
   -0.3499   -0.4214    0.2428    0.8007
   -0.5474   -0.0201    0.6979   -0.4614
   -0.7448    0.3812   -0.5462    0.0407


S =

   14.2691         0
         0    0.6268
         0         0
         0         0


V =

   -0.6414    0.7672
   -0.7672   -0.6414
```

```
[U,S,V] = svd(A,'econ')
```

```
U =

   -0.1525   -0.8226
   -0.3499   -0.4214
   -0.5474   -0.0201
   -0.7448    0.3812


S =

   14.2691         0
         0    0.6268


V =

   -0.6414    0.7672
```

```
   -0.7672   -0.6414
```

Since A is 4-by-2, `svd(A,'econ')` returns fewer columns in U and fewer rows in S compared to a full decomposition. Extra rows of zeros in S are excluded, along with the corresponding columns in U that would multiply with those zeros in the expression `A = U*S*V'`.

Rank, Column Space, and Null Space of Matrix

Use the results of the singular value decomposition to determine the rank, column space, and null space of a matrix.

```
A = [2 0 2; 0 1 0; 0 0 0]
```

```
A =

     2     0     2
     0     1     0
     0     0     0
```

```
[U,S,V] = svd(A)
```

```
U =

     1     0     0
     0     1     0
     0     0     1


S =

    2.8284         0         0
         0    1.0000         0
         0         0         0


V =

    0.7071         0   -0.7071
         0    1.0000         0
    0.7071         0    0.7071
```

Calculate the rank using the number of nonzero singular values.

```
s = diag(S);
rank_A = nnz(s)
```

```
rank_A = 2
```

Compute an orthonormal basis for the column space of A using the columns of U that correspond to nonzero singular values.

```
column_basis = U(:,logical(s))
```

```
column_basis =

     1     0
     0     1
     0     0
```

Compute an orthonormal basis for the null space of A using the columns of V that correspond to singular values equal to zero.

```
null_basis = V(:,~s)
```

```
null_basis =

   -0.7071
         0
    0.7071
```

The functions `rank`, `orth`, and `null` provide convenient ways to calculate these quantities.

Input Arguments

A — Input matrix

matrix

Input matrix. A can be either square or rectangular in size.

Data Types: `single` | `double`

Complex Number Support: Yes

Output Arguments

s — Singular values

column vector

Singular values, returned as a column vector. The singular values are nonnegative real numbers listed in decreasing order.

U — Left singular vectors

matrix

Left singular vectors, returned as the columns of a matrix.

- For an `m`-by-`n` matrix `A` with `m > n`, the economy-sized decompositions `svd(A,'econ')` and `svd(A,0)` compute only the first `n` columns of `U`. In this case, the columns of `U` are orthogonal and `U` is an `m`-by-`n` matrix that satisfies $U^H U = I_n$.
- For full decompositions, `svd(A)` returns `U` as an `m`-by-`m` unitary matrix satisfying $UU^H = U^H U = \mathrm{I}_m$. The columns of `U` that correspond to nonzero singular values form a set of orthonormal basis vectors for the range of `A`.

S — Singular values

diagonal matrix

Singular values, returned as a diagonal matrix. The diagonal elements of `S` are nonnegative singular values in decreasing order. The size of `S` is as follows:

- For an `m`-by-`n` matrix `A`, the economy-sized decomposition `svd(A,'econ')` returns `S` as a square matrix of order `min([m,n])`.
- For full decompositions, `svd(A)` returns `S` with the same size as `A`.
- If `m > n`, then `svd(A,0)` returns `S` as a square matrix of order `min([m,n])`.
- If `m < n`, then `svd(A,0)` returns `S` with the same size as `A`.

V — Right singular vectors

matrix

Right singular vectors, returned as the columns of a matrix.

- For an `m`-by-`n` matrix `A` with `m < n`, the economy decomposition `svd(A,'econ')` computes only the first `m` columns of `V`. In this case, the columns of `V` are orthogonal and `V` is an `n`-by-`m` matrix that satisfies $V^H V = I_m$.
- For full decompositions, `svd(A)` returns `V` as an `n`-by-`n` unitary matrix satisfying $VV^H = V^H V = I_n$. The columns of `V` that do *not* correspond to nonzero singular values form a set of orthonormal basis vectors for the null space of `A`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation uses a different `SVD` implementation than MATLAB uses. Because the singular value decomposition is not unique, left and right singular vectors might differ from those computed by MATLAB.

See Also

See Also

`gsvd` | `null` | `orth` | `rank` | `svds`

Topics

"Singular Values"

Introduced before R2006a

svds

Subset of singular values and vectors

Syntax

```
s = svds(A)
s = svds(A,k)
s = svds(A,k,sigma)
s = svds(A,k,sigma,opts)

s = svds(Afun,n, ___ )

[U,S,V] = svds( ___ )
[U,S,V,flag] = svds( ___ )
```

Description

`s = svds(A)` returns a vector of the six largest singular values of matrix `A`.

`s = svds(A,k)` returns the `k` largest singular values.

`s = svds(A,k,sigma)` returns `k` singular values based on the value of `sigma`. For example, `svds(A,k,'smallest')` returns the `k` smallest singular values.

`s = svds(A,k,sigma,opts)` additionally specifies options using a structure.

`s = svds(Afun,n, ___ )` specifies a function handle `Afun` instead of a matrix `A`. You can optionally specify `k`, `sigma`, or `opts` as additional input arguments.

`[U,S,V] = svds( ___ )` returns the left singular vectors `U`, diagonal matrix `S` of singular values, and right singular vectors `V`. You can use any of the input argument combinations in previous syntaxes.

`[U,S,V,flag] = svds( ___ )` also returns a convergence flag. If `flag` is `0`, then all the singular values converged.

Examples

Largest Singular Values

Compute the six largest singular values of a sparse matrix.

```
A = delsq(numgrid('C',15));
s = svds(A)
```

```
s =

    7.8666
    7.7324
    7.6531
    7.5213
    7.4480
    7.3517
```

Specify a second input to compute a specific number of the largest singular values.

```
s = svds(A,3)
```

```
s =

    7.8666
    7.7324
    7.6531
```

Smallest Singular Values

Compute the five smallest singular values of a sparse matrix.

```
A = delsq(numgrid('C',15));
s = svds(A,5,'smallest')
```

```
s =

    0.5520
    0.4787
    0.3469
```

```
    0.2676
    0.1334
```

Smallest Nonzero Singular Values

Create a sparse 100-by-100 Neumann matrix.

```
C = gallery('neumann',100);
```

Compute the ten smallest singular values.

```
ss = svds(C,10,'smallest')
```

```
ss =

    0.9828
    0.9049
    0.5625
    0.5625
    0.4541
    0.4506
    0.2256
    0.1139
    0.1139
         0
```

Compute the 10 smallest nonzero singular values. Since the matrix has a singlular value that is equal to zero, the `'smallestnz'` option omits it.

```
snz = svds(C,10,'smallestnz')
```

```
snz =

    0.9828
    0.9828
    0.9049
    0.5625
    0.5625
    0.4541
    0.4506
    0.2256
```

```
    0.1139
    0.1139
```

Largest Singular Values Using Function Handle

Create two matrices representing the upper-right and lower-left nonzero blocks in a sparse matrix.

```
n = 500;
B = rand(500);
C = rand(500);
```

Save `Afun` in your current directory so that it is available for use with `svds`.

```
function y = Afun(x,tflag,B,C,n)
if strcmp(tflag,'notransp')
    y = [B*x(n+1:end); C*x(1:n)];
else
    y = [C'*x(n+1:end); B'*x(1:n)];
end
```

The function `Afun` uses `B` and `C` to compute either `A*x` or `A'*x` (depending on the specified flag) without actually forming the entire sparse matrix `A = [zeros(n) B; C zeros(n)]`. This exploits the sparsity pattern of the matrix to save memory in the computation of `A*x` and `A'*x`.

Use `Afun` to calculate the 10 largest singular values of `A`. Pass `B`, `C`, and `n` as additional inputs to `Afun`.

```
s = svds(@(x,tflag) Afun(x,tflag,B,C,n),[1000 1000],10)
```

```
s =

  250.3248
  249.9914
   12.7627
   12.7232
   12.6988
   12.6608
```

```
   12.6166
   12.5643
   12.5419
   12.4512
```

Directly compute the 10 largest singular values of A to compare the results.

```
A = [zeros(n) B; C zeros(n)];
s = svds(A,10)
```

```
s =

  250.3248
  249.9914
   12.7627
   12.7232
   12.6988
   12.6608
   12.6166
   12.5643
   12.5419
   12.4512
```

Singular Value Decomposition of Sparse Matrix

`west0479` is a real-valued 479-by-479 sparse matrix. The matrix has a few large singular values, and many small singular values.

Load `west0479` and store it as A.

```
load west0479
A = west0479;
```

Compute the singular value decomposition of A, returning the six largest singular values and the corresponding singular vectors. Specify a fourth output argument to check convergence of the singular values.

```
[U,S,V,cflag] = svds(A);
cflag
```

```
cflag = 0
```

`cflag` indicates that all of the singular values converged. The singular values are on the diagonal of the output matrix `S`.

```
s = diag(S)
```

```
s =

   1.0e+05 *

    3.1895
    3.1725
    3.1695
    3.1685
    3.1669
    0.3038
```

Check the results by computing the full singular value decomposition of `A`. Convert `A` to a full matrix and use `svd`.

```
[U1,S1,V1] = svd(full(A));
```

Plot all of the singular values of `A` using a logarithmic scale.

```
semilogy(diag(S1),'r.')
title('Singular Values of west0479')
```

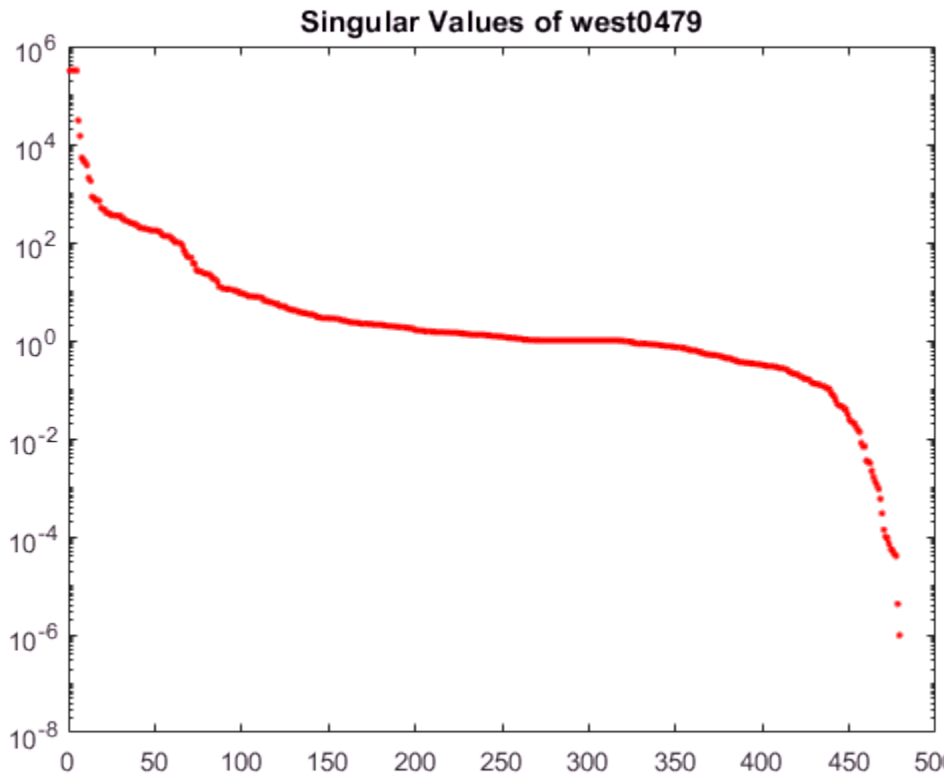

Fix Convergence Problem

Create a sparse diagonal matrix and calculate the six largest singular values.

```
A = diag(sparse([1e4*ones(1, 8) 1e4:-1:1]));
s = svds(A)
```

```
Warning: Maximum number of iterations reached. Results may be inaccurate.

s =

   1.0e+04 *
```

```
    1.0000
    0.9999
    0.9998
    0.9997
    0.9996
    0.9995
```

The `svds` algorithm produces a warning since the maximum number of iterations were performed but the tolerance could not be met.

The most effective way to address convergence problems is to increase the maximum size of the Krylov subspace used in the calculation by using a larger value for `p`. Do this by passing an options structure to `svds` that specifies `p = 60`.

```
opts.p = 60;
s = svds(A,6,'largest',opts)
```

```
s =

   1.0e+04 *

    1.0000
    1.0000
    1.0000
    1.0000
    1.0000
    1.0000
```

Use QR Decomposition to Compute SVD of Nearly Singular Matrix

Compute the 10 smallest singular values of a nearly singular matrix.

```
rng default
format shortg
B = spdiags([repelem([1; 1e-7], [198, 2]) ones(200, 1)], [0 1], 200, 200);
s1 = svds(B,10,'smallest')
```

```
Warning: Large residual norm detected. This is likely due to bad condition of the input

s1 =
       7.0945
```

```
       7.0945
       7.0945
       7.0945
       7.0945
       7.0945
       7.0945
       7.0945
      0.25927
   7.0888e-16
```

The warning indicates that `svds` fails to calculate the proper singular values. The failure with `svds` is because of the gap between the smallest and second smallest singular values. `svds(...,'smallest')` needs to invert `B`, which leads to large numerical error.

For comparison, compute the exact singular values using `svd`.

```
s = svd(full(B));
s = s(end-9:end)
```

```
s =
      0.14196
      0.12621
      0.11045
     0.094686
     0.078914
     0.063137
     0.047356
     0.031572
     0.015787
   7.0888e-16
```

In order to reproduce this calculation with `svds`, do a QR decomposition of `B`. The singular values of the triangular matrix `R` are the same as for `B`.

```
[Q,R,p] = qr(B,0);
```

Plot the norm of each row of `R`.

```
rownormR = sqrt(diag(R*R'));
semilogy(rownormR)
hold on;
semilogy(size(R, 1), rownormR(end), 'ro')
```

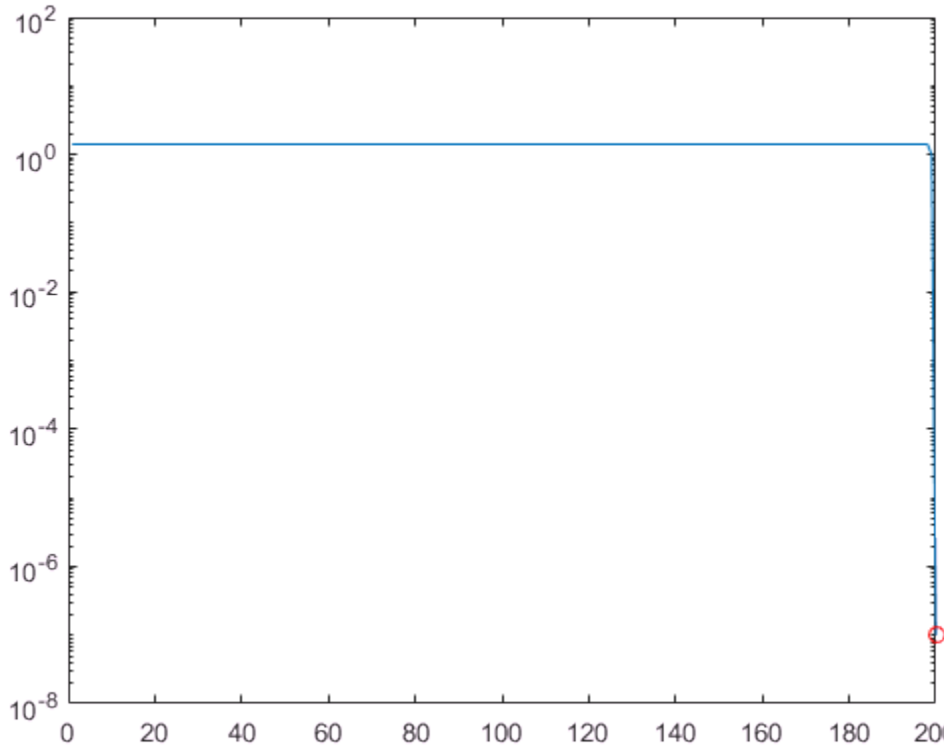

The last entry in R is nearly zero, which causes instability in the solution.

Prevent this entry from corrupting the good parts of the solution by setting the last row of R to be exactly zero.

```
R(end,:) = 0;
```

Use svds to find the 10 smallest singular values of R. The results are comparable to those obtained by svd.

```
sr = svds(R,10,'smallest')
```

```
sr =
      0.14196
```

```
     0.12621
     0.11045
    0.094686
    0.078914
    0.063137
    0.047356
    0.031572
    0.015787
           0
```

To compute the singular vectors of B using this method, transform the left and right singular vectors using Q and the permutation vector p.

```
[U,S,V] = svds(R,20,'s');
U = Q*U;
V(p,:) = V;
```

Input Arguments

A — Input matrix

matrix

Input matrix. A is typically, but not always, a large and sparse matrix.

Data Types: double
Complex Number Support: Yes

k — Number of singular values to compute

scalar

Number of singular values to compute, specified as a positive scalar integer. svds returns fewer singular values than requested if either of these conditions are met:

- k is larger than min(m,n)
- sigma = 'smallestnz' and k is larger than the number of nonzero singular values of A

If k is too large, then svds replaces it with the maximum valid value of k.

Example: svds(A,2) returns the two largest singular values of A.

`sigma` — Type of singular values

`'largest'` (default) | `'smallest'` | `'smallestnz'` | scalar

Type of singular values, specified as one of these values:

Option	Description
`'largest'` (default)	Largest singular values
`'smallest'`	Smallest singular values
`'smallestnz'`	Smallest nonzero singular values
scalar	Singular values closest to a scalar

Example: `svds(A,k,'smallest')` computes the `k` smallest singular values.

Example: `svds(A,k,100)` computes the `k` singular values closest to `100`.

`opts` — Options structure

structure

Options structure, specified as a structure containing one or more of the fields in this table.

Option Field	Description	Default
`opts.tol`	Convergence tolerance	`1e-10`
`opts.maxit`	Maximum number of iterations	`100`
`opts.p`	Maximum size of Krylov subspace	`max(3*K,15)`
`opts.u0`	Left initial starting vector	You can provide at most one of `opts.u0` or `opts.v0`. If neither option is specified, then for an m-by-n matrix `A`, the default is: • `m < n` — `opts.u0 = randn(m,1);` • `m >= n` — `opts.v0 = randn(n,1);`
`opts.v0`	Right initial starting vector	

Option Field	Description	Default
		`svds` selects `u0` and `v0` in a reproducible manner using a private random number stream. Changing the random number seed does not affect the default value. Set `opts.u0` or `opts.v0` as a random vector to use the global random number stream instead. This might make the results returned by `svds` slightly different on each call.

Note: `svds` ignores the option `p` when using a numeric scalar shift `sigma`.

Example: `opts.tol = 1e-6, opts.maxit = 500` creates a structure with values set for the fields `tol` and `maxit`.

Data Types: `struct`

`Afun` — Matrix function
function handle

Matrix function, specified as a function handle. The function `Afun` must satisfy these conditions:

- `Afun(x,'notransp')` accepts a vector `x` and returns the product `A*x`.
- `Afun(x,'transp')` accepts a vector `x` and returns the product `A'*x`.

Note: Use function handles only in the case where `sigma = 'largest'` (which is the default).

Example: `svds(Afun,[1000 1200])`

Data Types: `function_handle`

`n` — Size of matrix used by `Afun`

two-element vector

Size of matrix `A` that is used by `Afun`, specified as a two-element size vector `[m n]`.

Example: `svds(Afun,[1000 1200])`

Output Arguments

`s` — Singular values

column vector

Singular values, returned as a column vector. The singular values are nonnegative real numbers listed in decreasing order.

`U` — Left singular vectors

matrix

Left singular vectors, returned as the columns of a matrix. If `A` is an `m`-by-`n` matrix and you request `k` singular values, then `U` is an `m`-by-`k` matrix with orthonormal columns.

`S` — Singular values

diagonal matrix

Singular values, returned as a diagonal matrix. The diagonal elements of `S` are nonnegative singular values. If `A` is an `m`-by-`n` matrix and you request `k` singular values, then `S` is `k`-by-`k`.

`V` — Right singular vectors

matrix

Right singular vectors, returned as the columns of a matrix. If `A` is an `m`-by-`n` matrix and you request `k` singular values, then `V` is an `n`-by-`k` matrix with orthonormal columns.

`flag` — Convergence flag

scalar

Convergence flag, returned as a scalar. A value of `0` indicates that all the singular values converged. Otherwise, not all the singular values converged.

Tips

- `svds` generates the default starting vectors `opts.u0` and `opts.v0` using a private random number stream to ensure reproducibility across runs. Setting the random number generator state using `rng` before calling `svds` does not affect the output.
- Using `svds` is not the most efficient way to find a few singular values of small, dense matrices. If the problem fits into memory, it might be quicker to use `svd(full(A))`. For example, finding three singular values in a 500-by-500 matrix is a relatively small problem that is easily handled with `svd`.
- If `svds` fails to converge for a given matrix, increase the size of the Krylov subspace by increasing the value of `opts.p`. As secondary options, adjusting the maximum number of iterations, `opts.maxit`, and the convergence tolerance, `opts.tol`, can also help with convergence behavior.
- For faster performance, it sometimes works to increase `k`, especially when there are repeated singular values.

References

[1] Baglama, J. and L. Reichel, "Augmented Implicitly Restarted Lanczos Bidiagonalization Methods." *SIAM Journal on Scientific Computing*. Vol. 27, 2005, pp. 19–42.

[2] Larsen, R. M. "Lanczos Bidiagonalization with partial reorthogonalization." *Dept. of Computer Science, Aarhus University*. DAIMI PB-357, 1998.

See Also

See Also

`eigs` | `svd`

Topics

"Singular Values"

Introduced before R2006a

swapbytes

Swap byte ordering

Syntax

```
Y = swapbytes(X)
```

Description

`Y = swapbytes(X)` reverses the byte ordering of each element in array `X`, converting little-endian values to big-endian (and vice versa). The input array must contain all full, noncomplex, numeric elements.

Examples

Example 1

Reverse the byte order for a scalar 32-bit value, changing hexadecimal `12345678` to `78563412`:

```
A = uint32(hex2dec('12345678'));

B = dec2hex(swapbytes(A))
B =
    78563412
```

Example 2

Reverse the byte order for each element of a 1-by-4 matrix:

```
X = uint16([0 1 128 65535])
X =
      0      1    128  65535
```

```
Y = swapbytes(X);
Y =
      0    256  32768  65535
```

Examining the output in hexadecimal notation shows the byte swapping:

```
format hex

X, Y
X =
   0000   0001   0080   ffff
Y =
   0000   0100   8000   ffff
```

Example 3

Create a three-dimensional array A of 16-bit integers and then swap the bytes of each element:

```
format hex

A = uint16(magic(3) * 150);
A(:,:,2) = A * 40;

A
A(:,:,1) =
   04b0   0096   0384
   01c2   02ee   041a
   0258   0546   012c
A(:,:,2) =
   bb80   1770   8ca0
   4650   7530   a410
   5dc0   d2f0   2ee0

swapbytes(A)
ans(:,:,1) =
   b004   9600   8403
   c201   ee02   1a04
   5802   4605   2c01
ans(:,:,2) =
   80bb   7017   a08c
   5046   3075   10a4
   c05d   f0d2   e02e
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

Inheritance of the class of the input to `swapbytes` in a MATLAB Function block is supported only when the class of the input is `double`. For non-double inputs, the input port data types must be specified, not inherited.

See Also

`typecast`

Introduced before R2006a

switch, case, otherwise

Execute one of several groups of statements

Syntax

```
switch switch_expression
   case case_expression
      statements
   case case_expression
      statements
    ...
   otherwise
      statements
end
```

Description

`switch` *`switch_expression`*`, case` *`case_expression`*`, end` evaluates an expression and chooses to execute one of several groups of statements. Each choice is a case.

The `switch` block tests each case until one of the case expressions is true. A case is true when:

- For numbers, *`case_expression == switch_expression`*.
- For character vectors, `strcmp(`*`case_expression`*`,`*`switch_expression`*`) == 1`.
- For objects that support the `eq` function, *`case_expression == switch_expression`*.
- For a cell array *`case_expression`*, at least one of the elements of the cell array matches *`switch_expression`*, as defined above for numbers, character vectors, and objects.

When a case expression is true, MATLAB executes the corresponding statements and exits the `switch` block.

An evaluated *`switch_expression`* must be a scalar or character vector. An evaluated *`case_expression`* must be a scalar, a character vector, or a cell array of scalars or character vectors.

The `otherwise` block is optional. MATLAB executes the statements only when no case is true.

Examples

Compare Single Values

Display different text conditionally, depending on a value entered at the command prompt.

```
n = input('Enter a number: ');

switch n
    case -1
        disp('negative one')
    case 0
        disp('zero')
    case 1
        disp('positive one')
    otherwise
        disp('other value')
end
```

At the command prompt, enter the number 1.

```
positive one
```

Repeat the code and enter the number 3.

```
other value
```

Compare Against Multiple Values

Determine which type of plot to create based on the value of `plottype`. If `plottype` is either `'pie'` or `'pie3'`, create a 3-D pie chart. Use a cell array to contain both values.

```
x = [12 64 24];
plottype = 'pie3';

switch plottype
    case 'bar'
        bar(x)
        title('Bar Graph')
    case {'pie','pie3'}
```

```
        pie3(x)
        title('Pie Chart')
    otherwise
        warning('Unexpected plot type. No plot created.')
end
```

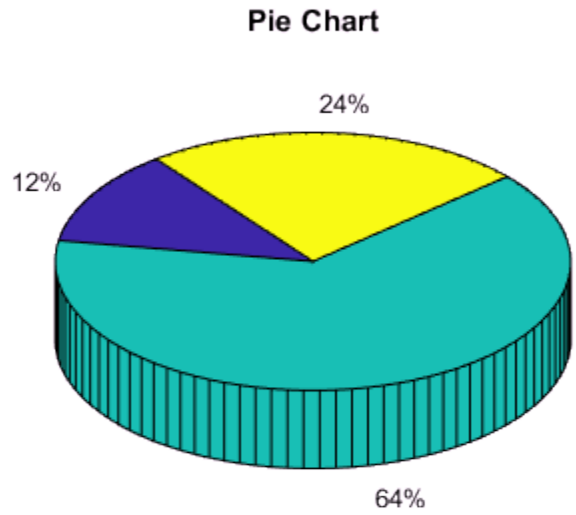

Tips

- A *case_expression* cannot include relational operators such as < or > for comparison against the *switch_expression*. To test for inequality, use `if`, `elseif`, `else` statements.

- The MATLAB `switch` statement does not fall through like a C language `switch` statement. If the first `case` statement is `true`, MATLAB does not execute the other `case` statements. For example:

```
result = 52;

switch(result)
   case 52
      disp('result is 52')
   case {52, 78}
      disp('result is 52 or 78')
end
```

```
result is 52
```

- Define all variables necessary for code in a particular case within that case. Since MATLAB executes only one case of any `switch` statement, variables defined within one case are not available for other cases. For example, if your current workspace does not contain a variable `x`, only cases that define `x` can use it:

```
switch choice
   case 1
      x = -pi:0.01:pi;
   case 2
      % does not know anything about x
end
```

- Do not use a `break` statement within a `switch` block. `break` is not defined outside a `for` or `while` loop.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If all case expressions are scalar integer values, then the code generator produces a C `switch` statement. At run time, if the switch value is not an integer, then the code generator produces an error.

- When the case expressions contain noninteger or nonscalar values, the code generator produces C `if` statements in place of a C `switch` statement.

See Also

See Also

`end` | `for` | `if` | `while`

Introduced before R2006a

sylvester

Solve Sylvester equation $AX + XB = C$ for X

Syntax

```
X = sylvester(A,B,C)
```

Description

`X = sylvester(A,B,C)` returns the solution, `X`, to the Sylvester equation.

Input `A` is an m-by-m matrix, input `B` is an n-by-n matrix, and both `C` and `X` are m-by-n matrices.

Examples

Solve Sylvester Equation with 3-by-3 Output

Create the coefficient matrices `A` and `B`.

```
A = [1 -1 1; 1 1 -1; 1 1 1];
B = magic(3);
```

Define `C` as the 3-by-3 identity matrix.

```
C = eye(3);
```

Use the `sylvester` function to solve the Sylvester equation for these values of `A`, `B`, and `C`.

```
X = sylvester(A,B,C)
```

```
X =

    0.1223   -0.0725    0.0131
   -0.0806   -0.0161    0.1587
   -0.0164    0.1784   -0.1072
```

The result is a 3-by-3 matrix.

Solve Sylvester Equation with 4-by-2 Output

Create a 4-by-4 coefficient matrix, A, and 2-by-2 coefficient matrix, B.

```
A = [1 0 2 3; 4 1 0 2; 0 5 5 6; 1 7 9 0];
B = [0 -1; 1 0];
```

Define C as a 4-by-2 matrix to match the corresponding sizes of A and B.

```
C = [1 0; 2 0; 0 3; 1 1]
```

```
C =

     1     0
     2     0
     0     3
     1     1
```

Use the `sylvester` function to solve the Sylvester equation for these values of A, B, and C.

```
X = sylvester(A,B,C)
```

```
X =

    0.4732   -0.3664
   -0.4006    0.3531
    0.3305   -0.1142
    0.0774    0.3560
```

The result is a 4-by-2 matrix.

Input Arguments

A,B,C — Input matrices
matrices

Input matrices, specified as matrices. Input `A` is an m-by-m square matrix, input `B` is an n-by-n square matrix, and input `C` is an m-by-n rectangular matrix. The function returns an error if any input matrix is sparse.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

X — Solution

matrix

Solution, returned as a matrix of the same size as `C`. The function returns an error if the eigenvalues of `A` and `-B` are not distinct (in this case, the solution, `X`, is singular or not unique).

Definitions

Sylvester Equation

The Sylvester equation is

$$AX + XB = C.$$

The equation has a unique solution when the eigenvalues of `A` and `-B` are distinct. In terms of the Kronecker tensor product, $\otimes$, the equation is

$$\left[I \otimes A + B^T \otimes I\right] X(:) = C(:),$$

where `I` is the identity matrix, and `X(:)` and `C(:)` denote the matrices `X` and `C` as single column vectors.

See Also

See Also

`ctranspose` | `eig` | `kron` | `mldivide` | `mtimes`

Introduced in R2014a

symamd

Symmetric approximate minimum degree permutation

Syntax

```
p = symamd(S)
p = symamd(S,knobs)
[p,stats] = symamd(...)
```

Description

`p = symamd(S)` for a symmetric positive definite matrix `S`, returns the permutation vector `p` such that `S(p,p)` tends to have a sparser Cholesky factor than `S`. To find the ordering for `S`, `symamd` constructs a matrix `M` such that `spones(M'*M) = spones(S)`, and then computes `p = colamd(M)`. The `symamd` function may also work well for symmetric indefinite matrices.

`S` must be square; only the strictly lower triangular part is referenced.

`p = symamd(S,knobs)` where `knobs` is a scalar. If `S` is `n`-by-`n`, rows and columns with more than `knobs*n` entries are removed prior to ordering, and ordered last in the output permutation `p`. If the `knobs` parameter is not present, then `knobs = spparms('wh_frac')`.

`[p,stats] = symamd(...)` produces the optional vector `stats` that provides data about the ordering and the validity of the matrix `S`.

`stats(1)`	Number of dense or empty rows ignored by `symamd`
`stats(2)`	Number of dense or empty columns ignored by `symamd`
`stats(3)`	Number of garbage collections performed on the internal data structure used by `symamd` (roughly of size `8.4*nnz(tril(S,-1)) + 9n` integers)
`stats(4)`	`0` if the matrix is valid, or `1` if invalid

`stats(5)`	Rightmost column index that is unsorted or contains duplicate entries, or `0` if no such column exists
`stats(6)`	Last seen duplicate or out-of-order row index in the column index given by `stats(5)`, or `0` if no such row index exists
`stats(7)`	Number of duplicate and out-of-order row indices

Although, MATLAB built-in functions generate valid sparse matrices, a user may construct an invalid sparse matrix using the MATLAB C or Fortran APIs and pass it to `symamd`. For this reason, `symamd` verifies that `S` is valid:

- If a row index appears two or more times in the same column, `symamd` ignores the duplicate entries, continues processing, and provides information about the duplicate entries in `stats(4:7)`.
- If row indices in a column are out of order, `symamd` sorts each column of its internal copy of the matrix `S` (but does not repair the input matrix `S`), continues processing, and provides information about the out-of-order entries in `stats(4:7)`.
- If `S` is invalid in any other way, `symamd` cannot continue. It prints an error message, and returns no output arguments (`p` or `stats`).

The ordering is followed by a symmetric elimination tree post-ordering.

Examples

Compare Reverse Cuthill-McKee and Minimum Degree

Here is a comparison of reverse Cuthill-McKee and minimum degree on the Bucky ball example mentioned in the `symrcm` reference page.

```
B = bucky+4*speye(60);
r = symrcm(B);
p = symamd(B);
R = B(r,r);
S = B(p,p);
subplot(2,2,1), spy(R,4), title('B(r,r)')
subplot(2,2,2), spy(S,4), title('B(s,s)')
subplot(2,2,3), spy(chol(R),4), title('chol(B(r,r))')
subplot(2,2,4), spy(chol(S),4), title('chol(B(s,s))')
```

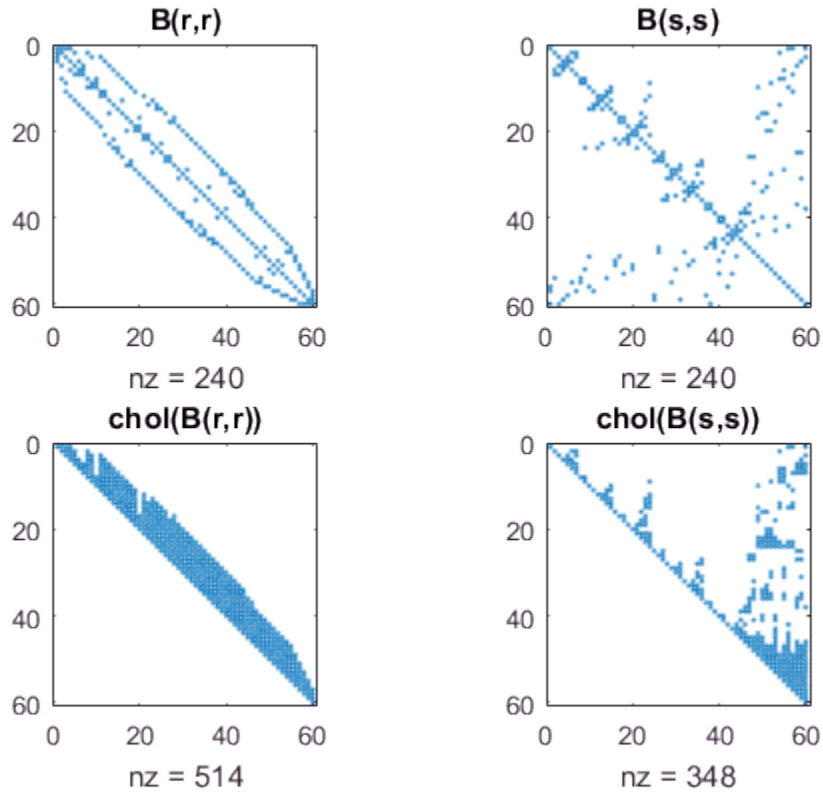

Even though this is a very small problem, the behavior of both orderings is typical. RCM produces a matrix with a narrow bandwidth which fills in almost completely during the Cholesky factorization. Minimum degree produces a structure with large blocks of contiguous zeros which do not fill in during the factorization. Consequently, the minimum degree ordering requires less time and storage for the factorization.

References

The authors of the code for `symamd` are Stefan I. Larimore and Timothy A. Davis (`davis@cise.ufl.edu`), University of Florida. The algorithm was developed in collaboration with John Gilbert, Xerox PARC, and Esmond Ng, Oak Ridge National

Laboratory. Sparse Matrix Algorithms Research at the University of Florida: http://www.cise.ufl.edu/research/sparse/

See Also

`colamd` | `colperm` | `symrcm` | `amd` | `spparms`

Introduced before R2006a

symbfact

Symbolic factorization analysis

Syntax

```
count = symbfact(A)
count = symbfact(A,'sym')
count = symbfact(A,'col')
count = symbfact(A,'row')
count = symbfact(A,'lo')
[count,h,parent,post,R] = symbfact(...)
[count,h,parent,post,L] = symbfact(A,type,'lower')
```

Description

`count = symbfact(A)` returns the vector of row counts of `R=chol(A)`. `symbfact` should be much faster than `chol(A)`.

`count = symbfact(A,'sym')` is the same as `count = symbfact(A)`.

`count = symbfact(A,'col')` returns row counts of `R=chol(A'*A)` (without forming it explicitly).

`count = symbfact(A,'row')` returns row counts of `R=chol(A*A')`.

`count = symbfact(A,'lo')` is the same as `count = symbfact(A)` and uses `tril(A)`.

`[count,h,parent,post,R] = symbfact(...)` has several optional return values.

The flop count for a subsequent Cholesky factorization is `sum(count.^2)`

Return Value	Description
`h`	Height of the elimination tree
`parent`	The elimination tree itself
`post`	Postordering of the elimination tree

Return Value	Description
R	0-1 matrix having the structure of `chol(A)` for the symmetric case, `chol(A'*A)` for the `'col'` case, or `chol(A*A')` for the `'row'` case.

`symbfact(A)` and `symbfact(A,'sym')` use the upper triangular part of `A (triu(A))` and assume the lower triangular part is the transpose of the upper triangular part. `symbfact(A,'lo')` uses `tril(A)` instead.

`[count,h,parent,post,L] = symbfact(A,type,'lower')` where `type` is one of `'sym'`,`'col'`, `'row'`, or`'lo'` returns a lower triangular symbolic factor `L=R'`. This form is quicker and requires less memory.

See Also

`chol` | `etree` | `treelayout`

Introduced before R2006a

symmlq

Symmetric LQ method

Syntax

```
x = symmlq(A,b)
symmlq(A,b,tol)
symmlq(A,b,tol,maxit)
symmlq(A,b,tol,maxit,M)
symmlq(A,b,tol,maxit,M1,M2)
symmlq(A,b,tol,maxit,M1,M2,x0)
[x,flag] = symmlq(A,b,...)
[x,flag,relres] = symmlq(A,b,...)
[x,flag,relres,iter] = symmlq(A,b,...)
[x,flag,relres,iter,resvec] = symmlq(A,b,...)
[x,flag,relres,iter,resvec,resveccg] = symmlq(A,b,...)
```

Description

`x = symmlq(A,b)` attempts to solve the system of linear equations `A*x=b` for `x`. The `n`-by-`n` coefficient matrix `A` must be symmetric but need not be positive definite. It should also be large and sparse. The column vector `b` must have length `n`. You can specify `A` as a function handle, `afun`, such that `afun(x)` returns `A*x`.

"Parameterizing Functions" explains how to provide additional parameters to the function `afun`, as well as the preconditioner function `mfun` described below, if necessary.

If `symmlq` converges, a message to that effect is displayed. If `symmlq` fails to converge after the maximum number of iterations or halts for any reason, a warning message is printed displaying the relative residual `norm(b-A*x)/norm(b)` and the iteration number at which the method stopped or failed.

`symmlq(A,b,tol)` specifies the tolerance of the method. If `tol` is `[]`, then `symmlq` uses the default, `1e-6`.

`symmlq(A,b,tol,maxit)` specifies the maximum number of iterations. If `maxit` is `[]`, then `symmlq` uses the default, `min(n,20)`.

`symmlq(A,b,tol,maxit,M)` and `symmlq(A,b,tol,maxit,M1,M2)` use the symmetric positive definite preconditioner `M` or `M = M1*M2` and effectively solve the system `inv(sqrt(M))*A*inv(sqrt(M))*y = inv(sqrt(M))*b` for `y` and then return `x = in(sqrt(M))*y`. If `M` is `[]` then `symmlq` applies no preconditioner. `M` can be a function handle `mfun` such that `mfun(x)` returns `M\x`.

`symmlq(A,b,tol,maxit,M1,M2,x0)` specifies the initial guess. If `x0` is `[]`, then `symmlq` uses the default, an all-zero vector.

`[x,flag] = symmlq(A,b,...)` also returns a convergence flag.

Flag	Convergence
0	`symmlq` converged to the desired tolerance `tol` within `maxit` iterations.
1	`symmlq` iterated `maxit` times but did not converge.
2	Preconditioner `M` was ill-conditioned.
3	`symmlq` stagnated. (Two consecutive iterates were the same.)
4	One of the scalar quantities calculated during `symmlq` became too small or too large to continue computing.
5	Preconditioner `M` was not symmetric positive definite.

Whenever `flag` is not `0`, the solution `x` returned is that with minimal norm residual computed over all the iterations. No messages are displayed if the `flag` output is specified.

`[x,flag,relres] = symmlq(A,b,...)` also returns the relative residual `norm(b-A*x)/norm(b)`. If `flag` is `0`, `relres <= tol`.

`[x,flag,relres,iter] = symmlq(A,b,...)` also returns the iteration number at which `x` was computed, where `0 <= iter <= maxit`.

`[x,flag,relres,iter,resvec] = symmlq(A,b,...)` also returns a vector of estimates of the `symmlq` residual norms at each iteration, including `norm(b-A*x0)`.

`[x,flag,relres,iter,resvec,resveccg] = symmlq(A,b,...)` also returns a vector of estimates of the conjugate gradients residual norms at each iteration.

Examples

Example 1

```
n = 100;
on = ones(n,1);
A = spdiags([-2*on 4*on -2*on],-1:1,n,n);
b = sum(A,2);
tol = 1e-10;
maxit = 50; M1 = spdiags(4*on,0,n,n);

x = symmlq(A,b,tol,maxit,M1);
symmlq converged at iteration 49 to a solution with relative
residual 4.3e-015
```

Example 2

This example replaces the matrix `A` in Example 1 with a handle to a matrix-vector product function `afun`. The example is contained in the function `run_symmlq` that:

- Calls `symmlq` with the function handle `@afun` as its first argument.
- Contains `afun` as a nested function, so that all variables in `run_symmlq` are available to `afun`.

The following shows the code for `run_symmlq`:

```
function x1 = run_symmlq
n = 100;
on = ones(n,1);
A = spdiags([-2*on 4*on -on],-1:1,n,n);
b = sum(A,2);
tol = 1e-8;
maxit = 15;
M1 = spdiags([on/(-2) on],-1:0,n,n);
M2 = spdiags([4*on -on],0:1,n,n);
x1 = symmlq(@afun,b,tol,maxit,M1);

       function y = afun(x)
          y = 4 * x;
          y(2:n) = y(2:n) - 2 * x(1:n-1);
          y(1:n-1) = y(1:n-1) - 2 * x(2:n);
       end
```

```
end
```

When you enter

```
x1=run_symmlq;
```

MATLAB software displays the message

```
symmlq converged at iteration 49 to a solution with relative
residual 4.3e-015
```

Example 3

Use a symmetric indefinite matrix that fails with `pcg`.

```
A = diag([20:-1:1,-1:-1:-20]);
b = sum(A,2);      % The true solution is the vector of all ones.
x = pcg(A,b);      % Errors out at the first iteration.
pcg stopped at iteration 1 without converging to the desired
tolerance 1e-006 because a scalar quantity became too small or
too large to continue computing.
The iterate returned (number 0) has relative residual 1
```

However, `symmlq` can handle the indefinite matrix `A`.

```
x = symmlq(A,b,1e-6,40);
symmlq converged at iteration 39 to a solution with relative
residual 1.3e-007
```

References

[1] Barrett, R., M. Berry, T. F. Chan, et al., *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*, SIAM, Philadelphia, 1994.

[2] Paige, C. C. and M. A. Saunders, "Solution of Sparse Indefinite Systems of Linear Equations." *SIAM J. Numer. Anal.*, Vol.12, 1975, pp. 617-629.

See Also

See Also

`bicg` | `bicgstab` | `cgs` | `gmres` | `lsqr` | `minres` | `mldivide` | `pcg` | `qmr`

Topics

"Create Function Handle"

Introduced before R2006a

symrcm

Sparse reverse Cuthill-McKee ordering

Syntax

```
r = symrcm(S)
```

Description

`r = symrcm(S)` returns the symmetric reverse Cuthill-McKee ordering of `S`. This is a permutation `r` such that `S(r,r)` tends to have its nonzero elements closer to the diagonal. This is a good preordering for LU or Cholesky factorization of matrices that come from long, skinny problems. The ordering works for both symmetric and nonsymmetric `S`.

For a real, symmetric sparse matrix, `S`, the eigenvalues of `S(r,r)` are the same as those of `S`, but `eig(S(r,r))` probably takes less time to compute than `eig(S)`.

Examples

Reverse Cuthill-McKee Ordering

The statement

```
B = bucky;
```

uses a function in the `demos` toolbox to generate the adjacency graph of a truncated icosahedron. This is better known as a soccer ball, a Buckminster Fuller geodesic dome (hence the name `bucky`), or, more recently, as a 60-atom carbon molecule. There are 60 vertices. The vertices have been ordered by numbering half of them from one hemisphere, pentagon by pentagon; then reflecting into the other hemisphere and gluing the two halves together.

With this numbering, the matrix does not have a particularly narrow bandwidth, as the first spy plot shows:

```
figure();
subplot(1,2,1),spy(B),title('B')
```

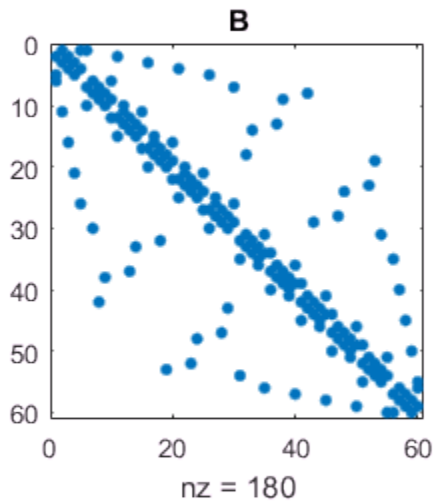

The reverse Cuthill-McKee ordering is obtained with:

```
p = symrcm(B);
R = B(p,p);
```

The `spy` plot shows a much narrower bandwidth.

```
subplot(1,2,2),spy(R),title('B(p,p)')
```

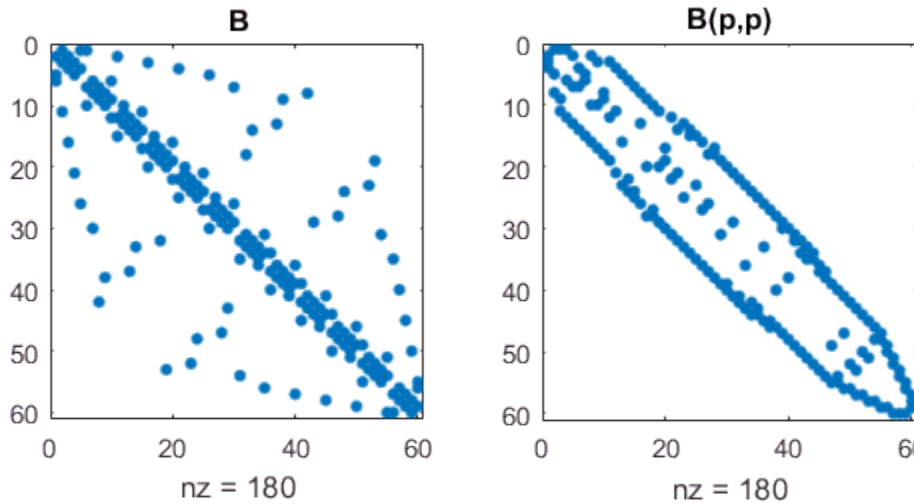

This example is continued in the reference page for `symamd`.

The bandwidth can also be computed with:

```
[i,j] = find(B);
bw = max(i-j) + 1;
```

The bandwidths of `B` and `R` are 35 and 12, respectively.

Algorithms

The algorithm first finds a pseudoperipheral vertex of the graph of the matrix. It then generates a level structure by breadth-first search and orders the vertices by decreasing distance from the pseudoperipheral vertex. The implementation is based closely on the SPARSPAK implementation described by George and Liu.

References

[1] George, Alan and Joseph Liu, *Computer Solution of Large Sparse Positive Definite Systems*, Prentice-Hall, 1981.

[2] Gilbert, John R., Cleve Moler, and Robert Schreiber, "Sparse Matrices in MATLAB: Design and Implementation," *SIAM Journal on Matrix Analysis*, 1992. A slightly expanded version is also available as a technical report from the Xerox Palo Alto Research Center.

See Also

`colamd` | `colperm` | `symamd`

Introduced before R2006a

symvar

Determine symbolic variables in expression

Syntax

```
C = symvar(expr)
```

Description

`C = symvar(expr)` searches the expression, `expr`, for identifiers other than `i`, `j`, `pi`, `inf`, `nan`, `eps`, and common functions. These identifiers are the names of variables in the expression. `symvar` returns the identifiers in a cell array of character vectors, `C`. If `symvar` finds no identifiers, then `C` is an empty cell array.

Examples

Find Identifiers in Expression

Create a character vector that contains an expression. Find the identifiers in the expression and return them in a cell array.

```
C = symvar('cos(pi*x - beta1)')
```

```
C = 2×1 cell array
    'beta1'
    'x'
```

Input Arguments

`expr` — Input expression
character vector

Input expression, specified as a character vector.

See Also

See Also

`eval` | `evalc` | `strfind`

Introduced before R2006a

synchronize

Synchronize timetables to common time vector, and resample or aggregate data from input timetables

The `synchronize` function collects the variables from all input timetables, synchronizes them to a common time vector, and returns the result as a single timetable. The effect is similar to a horizontal concatenation, though the input timetables can have different row times. When the `synchronize` function synchronizes timetable variables to different times, it also resamples or aggregates the data in the variables using a method that you specify.

Syntax

```
TT = synchronize(TT1,TT2)

TT = synchronize(TT1,TT2,newTimeBasis,method)
TT = synchronize(TT1,TT2,newTimeStep,method)
TT = synchronize(TT1,TT2,newTimes,method)

TT = synchronize(TT1,TT2,newTimeBasis)
TT = synchronize(TT1,TT2,newTimeStep)
TT = synchronize(TT1,TT2,newTimes)

TT = synchronize(TT1,TT2,___,Name,Value)
TT = synchronize(TT1,...,TTN,___)
```

Description

`TT = synchronize(TT1,TT2)` creates a timetable, `TT`, that contains all variables from both the input timetables `TT1` and `TT2`, synchronized to a vector of row times that is the union of the row times from `TT1` and `TT2`. The row times of `TT` are in sorted order with no repeated times.

In effect, `synchronize` horizontally concatenates the variables of `TT1` and `TT2`, even when they have row times that differ. As a result, `synchronize` inserts a missing data indicator in `TT` wherever it has:

- A row time only from TT1 but no corresponding data from the variables of TT2.
- A row time only from TT2 but no corresponding data from the variables of TT1.

If TT1 and TT2 have variables with the same names, then synchronize renames them and copies both variables into TT.

TT = synchronize(TT1,TT2,newTimeBasis,method) creates TT by synchronizing the variables from TT1 and TT2 to a new time vector specified by newTimeBasis. synchronize resamples or aggregates data from the variables in TT1 and TT2 using the operation specified by method. The input argument, newTimeBasis, specifies how synchronize constructs the row times of TT from the row times of TT1 and TT2.

For example, if newTimeBasis is 'union' and method is 'linear', then TT contains the row times from TT1 and TT2, and synchronize uses linear interpolation to resample the data from the input timetables to the output row times.

TT = synchronize(TT1,TT2,newTimeStep,method) creates TT by synchronizing the variables from TT1 and TT2 to a new time vector that is regularly spaced by the time unit specified by newTimeStep.

For example, if newTimeStep is 'daily' and method is 'mean', then TT contains row times that are one day apart, and TT contains daily means for each variable from TT1 and TT2.

TT = synchronize(TT1,TT2,newTimes,method) creates TT by synchronizing the variables from TT1 and TT2 to newTimes, a datetime or duration vector of unique, sorted times that you specify. The times in newTimes become the row times of TT.

TT = synchronize(TT1,TT2,newTimeBasis) creates TT by synchronizing the variables from TT1 and TT2 to a new time vector. synchronize inserts missing data indicators where needed in TT.

TT = synchronize(TT1,TT2,newTimeStep) creates TT by synchronizing the variables from TT1 and TT2 to a new time vector that is regularly spaced by the time unit specified by newTimeStep. The synchronize function inserts missing data indicators where needed in TT.

TT = synchronize(TT1,TT2,newTimes) creates TT by synchronizing the variables from TT1 and TT2 to the time vector, newTimes. The synchronize function inserts missing data indicators where needed in TT.

`TT = synchronize(TT1,TT2, ___ ,Name,Value)` synchronizes timetables with additional options specified by one or more `Name,Value` pairs. You can use this syntax with the input arguments of any of the previous syntaxes.

`TT = synchronize(TT1,...,TTN, ___ )` creates the timetable, `TT`, by synchronizing the `N` timetables `TT1,...,TTN`. You can use this syntax with the input arguments of any of the previous syntaxes.

Examples

Synchronize Timetables and Insert Missing Data Indicators

Load two sample timetables from a file. Then synchronize their data to a vector of new row times.

```
load(fullfile(matlabroot,'examples','matlab','smallTT'));
```

Display the timetables. `TT1` has row times that are out of order. `TT1` and `TT2` have different variables.

```
TT1
```

```
TT1 = 3×1 timetable
            Time                Temp
    ____________________        ____

    18-Dec-2015 12:00:00        42.3
    18-Dec-2015 08:00:00        37.3
    18-Dec-2015 10:00:00        39.1
```

```
TT2
```

```
TT2 = 3×1 timetable
            Time                Pressure
    ____________________        ________

    18-Dec-2015 09:00:00         30.1
    18-Dec-2015 11:00:00        30.03
    18-Dec-2015 13:00:00         29.9
```

Synchronize TT1 and TT2. The output timetable, TT, contains all the row times from both timetables, in sorted order. In TT, Temp contains NaN for row times from TT2, and Pressure contains NaN for row times from TT1.

```
TT = synchronize(TT1,TT2)
```

```
TT = 6×2 timetable
            Time                Temp    Pressure
    ____________________        ____    ________

    18-Dec-2015 08:00:00        37.3      NaN
    18-Dec-2015 09:00:00         NaN     30.1
    18-Dec-2015 10:00:00        39.1      NaN
    18-Dec-2015 11:00:00         NaN    30.03
    18-Dec-2015 12:00:00        42.3      NaN
    18-Dec-2015 13:00:00         NaN     29.9
```

Interpolate Data Values to Row Times

Load two sample timetables that contain weather measurements. Synchronize their data to the union of the row times from the timetables.

```
load(fullfile(matlabroot,'examples','matlab','firstTT'));
```

Display the timetables.

```
TT1
```

```
TT1 = 3×1 timetable
            Time                Temp
    ____________________        ____

    06-Jun-2016 15:00:00        79.7
    06-Jun-2016 16:00:00        76.3
    06-Jun-2016 17:00:00        74.9
```

```
TT2
```

```
TT2 = 4×1 timetable
            Time                Humidity
    ____________________        ________
```

```
    06-Jun-2016 14:35:48    49.7
    06-Jun-2016 15:35:48    52.2
    06-Jun-2016 16:35:48    56.7
    06-Jun-2016 17:35:48      60
```

Synchronize the timetables. To select the union of row times, specify `'union'`. To resample `TT1.Temp` and `TT2.Humidity` using linear interpolation, specify `'linear'`.

```
TT = synchronize(TT1,TT2,'union','linear')
```

```
TT = 7×2 timetable
            Time              Temp     Humidity
    ____________________    ______    ________

    06-Jun-2016 14:35:48    81.071      49.7
    06-Jun-2016 15:00:00      79.7    50.708
    06-Jun-2016 15:35:48    77.671      52.2
    06-Jun-2016 16:00:00      76.3    54.014
    06-Jun-2016 16:35:48    75.464      56.7
    06-Jun-2016 17:00:00      74.9     58.03
    06-Jun-2016 17:35:48    74.064        60
```

Aggregate Data When Synchronizing Timetables

Synchronize two timetables to new row times that specify time bins that each span a day. Aggregate the data from the input timetables into the daily time bins.

Load sample timetables that contain two different sets of environmental measurements, `indoors` and `outdoors`. The air quality data come from a sensor inside a building, while the weather measurements come from sensors outside. The timetables include measurements taken from November 15, 2015, to November 19, 2015.

```
load(fullfile(matlabroot,'examples','matlab','indoors'));
load(fullfile(matlabroot,'examples','matlab','outdoors'));
```

Display the first three lines of each timetable. They do not contain the same row times or variables.

```
indoors(1:3,:)
```

```
ans = 3×2 timetable
            Time           Humidity    AirQuality
```

```
    ___________________    ________    __________

    2015-11-15 00:00:24    36          80
    2015-11-15 01:13:35    36          80
    2015-11-15 02:26:47    37          79
```

```
outdoors(1:3,:)
```

```
ans = 3×3 timetable
            Time           Humidity    TemperatureF    PressureHg
    ___________________    ________    ____________    __________

    2015-11-15 00:00:24      49        51.3            29.61
    2015-11-15 01:30:24    48.9        51.5            29.61
    2015-11-15 03:00:24    48.9        51.5            29.61
```

Aggregate the data from the timetables into daily time bins using the `synchronize` function. Specify `'daily'` to aggregate the data into time bins that span one day apiece. Specify `'mean'` to obtain the mean values in each time bin for each variable.

```
TT = synchronize(indoors,outdoors,'daily','mean');
TT(1:3,:)
```

```
ans = 3×5 timetable
            Time           Humidity_indoors    AirQuality    Humidity_outdoors    Tempe
    ___________________    ________________    __________    _________________    _____

    2015-11-15 00:00:00     36.5               80.05         48.931               51.39
    2015-11-16 00:00:00    36.85               80.35         47.924               51.57
    2015-11-17 00:00:00    36.85               79.45          48.45               51.23
```

Synchronize Timetables to Arbitrary Time Vector

Synchronize two small timetables with weather measurements to an arbitrary time vector. Use linear interpolation to resample data for times in the time vector that do not match row times from the input timetables.

Load two small timetables, with row times for measurements taken at the half-hour mark. However, in each timetable, there is a row time for data that was not collected at the half-hour mark. Both timetables are irregular, which means that the time step is different between consecutive row times.

```
load(fullfile(matlabroot,'examples','matlab','halfHoursTT'));
```

Display the timetables. TT1 and TT2 have three rows and different variables.

```
TT1
```

```
TT1 = 3×1 timetable
            Time                Temp
    ____________________        ____

    18-Dec-2015 08:30:00        47.6
    18-Dec-2015 09:30:00        49.2
    18-Dec-2015 10:47:23        51.4
```

```
TT2
```

```
TT2 = 3×1 timetable
            Time                Pressure
    ____________________        ________

    18-Dec-2015 07:00:00         29.7
    18-Dec-2015 09:30:00        30.03
    18-Dec-2015 10:30:00         29.9
```

Specify a time vector that includes some of the row times from each timetable.

```
newTimes = datetime('2015-12-18 08:30:00') + hours(0:1:2)
```

```
newTimes = 1×3 datetime array
   18-Dec-2015 08:30:00   18-Dec-2015 09:30:00   18-Dec-2015 10:30:00
```

Synchronize TT1 and TT2 to newTimes. The newTimes vector has times that are not row times of TT1 or TT2. To interpolate data values for times in newTimes that do not match row times in TT1 or TT2, specify 'linear'.

```
TT = synchronize(TT1,TT2,newTimes,'linear')
```

```
TT = 3×2 timetable
            Time                Temp      Pressure
    ____________________        ______    ________

    18-Dec-2015 08:30:00         47.6     29.898
```

```
    18-Dec-2015 09:30:00      49.2     30.03
    18-Dec-2015 10:30:00    50.906      29.9
```

Synchronize Timetables with Intersecting Row Times

Load two sample timetables and synchronize their data to a vector of row times they have in common.

```
load(fullfile(matlabroot,'examples','matlab','intersectTT'));
```

Display the timetables. TT1 and TT2 have three rows and different variables.

```
TT1
```

```
TT1 = 3×1 timetable
            Time                Temp
    ____________________        ____

    18-Dec-2015 08:00:00        37.3
    18-Dec-2015 10:00:00        39.1
    18-Dec-2015 12:00:00        42.3
```

```
TT2
```

```
TT2 = 3×1 timetable
            Time                Pressure
    ____________________        ________

    18-Dec-2015 06:00:00         30.1
    18-Dec-2015 08:00:00        30.03
    18-Dec-2015 10:00:00         29.9
```

Synchronize TT1 and TT2, specifying 'intersection' as the basis for the row times of the output timetable. TT has only two rows because TT1 and TT2 have only two row times in common.

```
TT = synchronize(TT1,TT2,'intersection')
```

```
TT = 2×2 timetable
            Time                Temp    Pressure
    ____________________        ____    ________
```

```
    18-Dec-2015 08:00:00    37.3    30.03
    18-Dec-2015 10:00:00    39.1     29.9
```

There is no need to interpolate or fill unmatched rows, because TT1 and TT2 both have data for the row times they have in common.

Synchronize Timetables to Hourly Times

Synchronize two small timetables with weather measurements to an hourly time vector.

Load two small timetables. In each timetable, there is a row time for data that was not collected on the hour. Both timetables are irregular, which means that the time step is different between consecutive row times.

```
load(fullfile(matlabroot,'examples','matlab','irregularTT'));
```

Display the timetables. TT1 and TT2 have three rows and different variables.

```
TT1
```

```
TT1 = 3×1 timetable
            Time            Temp
    ____________________    ____

    18-Dec-2015 08:00:00    37.3
    18-Dec-2015 09:11:17    39.1
    18-Dec-2015 10:00:00    42.3
```

```
TT2
```

```
TT2 = 3×1 timetable
            Time            Pressure
    ____________________    ________

    18-Dec-2015 08:00:00    29.8
    18-Dec-2015 09:27:23    29.7
    18-Dec-2015 10:00:00    30.3
```

Synchronize TT1 and TT2, specifying 'hourly' as the time step for the row times of the output timetable. TT has data from TT1 and TT2 where they have row times that are on

the hour. TT has missing data indicators where it has a row time that TT1 and TT2 do not have.

```
TT = synchronize(TT1,TT2,'hourly')
```

```
TT = 3×2 timetable
            Time                Temp    Pressure
    ____________________        ____    ________

    18-Dec-2015 08:00:00        37.3    29.8
    18-Dec-2015 09:00:00         NaN     NaN
    18-Dec-2015 10:00:00        42.3    30.3
```

Synchronize Timetables Using Multiple Methods

Synchronize two timetables. Apply the mean method to some timetable variables and the sum method to others.

Load two small timetables that contain weather measurements for Boston and Natick. Each timetable contains temperature and rainfall readings.

```
load(fullfile(matlabroot,'examples','matlab','citiesTT'));
Boston
```

```
Boston = 6×2 timetable
            Time                Temp    Rain
    ___________________         ____    ____

    2016-06-09 06:03:00         59.5    0.05
    2016-06-09 12:00:23           63    0.08
    2016-06-09 18:02:57         61.7    0.13
    2016-06-10 06:01:47         55.4    0.15
    2016-06-10 12:06:00         62.3    0.87
    2016-06-10 18:02:57         58.8    0.33
```

```
Natick
```

```
Natick = 5×2 timetable
            Time                Temp     Rain
    ___________________         _____    _____

    2016-06-09 12:00:23          61.2    0.076
```

```
    2016-06-09 17:59:00     60.3     0.11
    2016-06-10 09:03:01     56.1     0.19
    2016-06-10 12:07:03    62.17     0.72
    2016-06-10 17:59:57     58.3      0.1
```

Synchronize the measurements to daily times to produce mean temperatures and the sums of the rainfall measurements. `synchronize` applies the specified method to all timetable variables. To apply different methods to different timetable variables, index into the timetables to select different variables, and call `synchronize` for each method you use.

```
BOS = Boston(:,'Temp');
NTK = Natick(:,'Temp');
TT1 = synchronize(BOS,NTK,'daily','mean')
```

```
TT1 = 2×2 timetable
            Time           Temp_BOS    Temp_NTK
    ____________________    ________    ________

    2016-06-09 00:00:00      61.4       60.75
    2016-06-10 00:00:00    58.833      58.857
```

```
BOS = Boston(:,'Rain');
NTK = Natick(:,'Rain');
TT2 = synchronize(BOS,NTK,'daily','sum')
```

```
TT2 = 2×2 timetable
            Time           Rain_BOS    Rain_NTK
    ____________________    ________    ________

    2016-06-09 00:00:00    0.26        0.186
    2016-06-10 00:00:00    1.35         1.01
```

To combine all results in one timetable, concatenate `TT1` and `TT2`.

```
TT = [TT1 TT2]
```

```
TT = 2×4 timetable
            Time           Temp_BOS    Temp_NTK    Rain_BOS    Rain_NTK
    ____________________    ________    ________    ________    ________

    2016-06-09 00:00:00      61.4       60.75       0.26        0.186
```

```
2016-06-10 00:00:00    58.833      58.857      1.35         1.01
```

- "Create Timetables"
- "Clean Timetable with Missing, Duplicate, or Nonuniform Times"
- "Resample and Aggregate Data in Timetable"
- "Combine Timetables and Synchronize Their Data"
- "Select Timetable Data by Row Time and Variable Type"
- "Access Data in a Table"

Input Arguments

`TT1,TT2` — Input timetables

timetables

Input timetables.

`newTimeBasis` — Basis for computing row times of output timetable

character vector

Basis for computing row times of output timetable, specified as a character vector. `newTimeBasis` can be any of the listed methods.

Method	Description
`'union'` (default)	Union of the row times
`'intersection'`	Intersection of the row times
`'commonrange'`	Union of the row times, but over the intersection of the time ranges
`'first'`	Row times from the first input timetable only
`'last'`	Row times from the last input timetable only

`newTimeStep` — Time step for spacing times in output timetable

character vector

Time step for spacing times in the output timetable, specified as a character vector. `newTimeStep` can be any of the listed time steps.

Time Step	Description
`'yearly'`	One year
`'quarterly'`	One quarter
`'monthly'`	One month
`'weekly'`	One week
`'daily'`	One day
`'hourly'`	One hour
`'minutely'`	One minute
`'secondly'`	One second

The first row time of `TT` is at the beginning of the time unit that includes the earliest row time from the input timetables. The range of row times in `TT` covers the range of row times from `TT1` and `TT2`. However, `TT` might not include any of the actual row times from `TT1` or `TT2`, since they can have row times that are not at the beginnings of any time unit.

`newTimes` — New time vector

datetime vector | duration vector

New time vector, specified as a datetime vector or a duration vector. The new time vector must be a column vector. `newTimes` can have a different number of rows than any of the input timetables.

`method` — Method for adjusting timetable data

character vector | function handle

Method for adjusting timetable data, specified as a character vector or a function handle. You can use any of the listed methods to adjust the data from the input timetables.

Fill Methods

Copy data from the rows of each input timetable when row times of the output timetable match row times of the corresponding input. Then, fill the remaining elements of the output timetable with missing data indicators.

To fill the remaining elements with a constant instead of a missing data indicator, use the `'Constant'` parameter.

Method	Description
`'fillwithmissing'` (default)	Fill gaps with missing data indicators (for example, `NaN` for numeric variables).
`'fillwithconstant'`	Fill gaps with the value of the `'Constant'` parameter. The default value is `0`.

Nearest Neighbor Methods

Copy data from the rows of the input timetables to output timetable rows whose row times are the nearest match, according to the specified method. Input timetables must be sorted by row times.

Method	Description
`'previous'`	Copy data from the nearest preceding neighbor in the input timetable, proceeding from the end of the vector of row times. If there are duplicate row times, then `'previous'` indicates the last of the duplicates.
`'next'`	Copy data from the nearest following neighbor in the input timetable, proceeding from the beginning of the vector of row times. If there are duplicate row times, then `'next'` indicates the first of the duplicates.
`'nearest'`	Copy data from the nearest neighbor in the input timetable.

Interpolation Methods

Interpolate data values in the output timetable from data values in neighboring rows of the input timetables. Input timetables must have row times that are sorted and unique. To control how the data are extrapolated beyond the first and last row times of the input timetables, use the `'EndValues'` parameter.

Method	Description
`'linear'`	Use linear interpolation.
`'spline'`	Use piecewise cubic spline interpolation.
`'pchip'`	Use shape-preserving piecewise cubic interpolation.

Aggregation Methods

Aggregate data from rows of the input timetables over time bins specified by the row times of the output timetable. Each row time of `TT` is the left edge of a time bin, with the next consecutive row time being the right edge. By default, the left edges are included in the time bins. To control whether the left or the right bin edges are included in the time bins, use the `'IncludedEdge'` parameter.

If you specify the time vector, `newTimes`, then `newTimes` must be sorted in ascending order. If you specify the time basis of the output timetable as `'first'` or `'last'`, then the row times of either the first or the last timetable must be sorted in ascending order.

All the listed methods omit `NaN`s, `NaT`s, and other missing data indicators, except for `func`. To include missing data indicators, specify `func` as a function handle to a function that includes them when aggregating data.

Method	Description
`'sum'`	Sum the values in each time bin.
`'mean'`	Calculate the mean of the values in each time bin.
`'prod'`	Calculate the product of the values in each time bin.
`'min'`	Calculate the minimum of the values in each time bin.
`'max'`	Calculate the maximum of the values in each time bin.
`'count'`	Count the number of values in each time bin.
`'firstvalue'`	Use the first value in each time bin.
`'lastvalue'`	Use the last value in each time bin.

Method	Description
`@func`	Use the function specified by the function handle (for example, `@std` to calculate the standard deviation for the values in each time bin). `func` must return an output argument that is a scalar or a row vector, and must accept empty inputs.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `TT = synchronize(TT1,TT2,'fillwithconstant','Constant',0)` synchronizes the timetables `TT1` and `TT2` and fills elements of `TT` with zeroes where they have row times that are not matched in the corresponding input timetable.

`'Constant'` — Constant value when method is `'fillwithconstant'`
numeric scalar

Constant value when the method is `'fillwithconstant'`, specified as a numeric scalar. The default value is `0`.

`'EndValues'` — Method for extrapolation when using interpolation method
`'extrap'` (default) | numeric, datetime, or duration scalar

Method for extrapolation when using an interpolation method, specified as the comma-separated pair consisting of `'EndValues'` and either `'extrap'`, or a constant scalar value.

Method	Description
`'extrap'` (default)	Extrapolate using the method specified by the `method` input argument
scalar value	Extrapolate by filling with a constant value (numeric, datetime, or duration value only)

`'IncludedEdge'` — Edges to include in each time bin
`'left'` (default) | `'right'`

Edges to include in each time bin, specified as the comma-separated pair consisting of `'IncludedEdge'` and either `'left'` or `'right'`. Each row time of `TT2` is the left edge of a time bin, with the next consecutive row time being the right edge.

Edges to Include	Description
`'left'` (default)	All bins include the left bin edge, except for the last bin, which includes both edges
`'right'`	All bins include the right bin edge, except for the first bin, which includes both edges

If you specify `'left'`, then the time bins include the left edges except for the last bin, which includes both edges. If you specify `'right'`, then the time bins include the right edges except for the first bin, which includes both edges.

Example: `TT = synchronize(TT1,TT2,'hourly','mean','IncludedEdge','right')` includes the right bin edge of each time bin.

See Also

See Also

`horzcat` | `innerjoin` | `outerjoin` | `retime` | `vertcat`

Topics

"Create Timetables"
"Clean Timetable with Missing, Duplicate, or Nonuniform Times"
"Resample and Aggregate Data in Timetable"
"Combine Timetables and Synchronize Their Data"
"Select Timetable Data by Row Time and Variable Type"
"Access Data in a Table"
"Tables"
"Represent Dates and Times in MATLAB"

Introduced in R2016b

syntax

Two ways to call MATLAB functions

Description

You can call MATLAB functions using either *command syntax* or *function syntax*, as described below.

Command Syntax

A function call in this syntax consists of the function name followed by one or more arguments separated by spaces:

```
functionname arg1 arg2 ... argn
```

Command syntax does not allow you to obtain any values that might be returned by the function. Attempting to assign output from the function to a variable using command syntax generates an error. Use function syntax instead.

Examples of command syntax:

```
save mydata.mat x y z
import java.awt.Button java.lang.String
```

Arguments are treated as character vectors. See the examples below, under "Argument Passing" on page 1-11226.

Function Syntax

A function call in this syntax consists of the function name followed by one or more arguments separated by commas and enclosed in parentheses:

```
functionname(arg1, arg2, ..., argn)
```

You can assign the output of the function to one or more output values. When assigning to more than one output variable, separate the variables by commas or spaces and enclose them in square brackets (`[ ]`):

```
[out1,out2,...,outn] = functionname(arg1, arg2, ..., argn)
```

Examples of function syntax:

```
copyfile('srcfile', '..\mytests', 'writable')
[x1,x2,x3,x4] = deal(A{:})
```

Arguments are passed to the function by value. See the examples below, under "Argument Passing" on page 1-11226.

Argument Passing

When calling a function using command syntax, MATLAB passes the arguments as character vectors. When using function syntax, arguments are passed by value.

In the following example, assign a value to `A` and then call `disp` on the variable to display the value passed. Calling `disp` with command syntax passes the variable name, `'A'`:

```
A = pi;
disp A
   A
```

while function syntax passes the value assigned to `A`:

```
A = pi;
disp(A)
   3.1416
```

The next example passes two character vectors to `strcmp` for comparison. Calling the function with command syntax compares the variable names, `'str1'` and `'str2'`:

```
str1 = 'one';    str2 = 'one';
strcmp str1 str2
ans =
     0        (unequal)
```

while function syntax compares the values assigned to the variables, `'one'` and `'one'`:

```
str1 = 'one';    str2 = 'one';
strcmp(str1, str2)
ans =
     1        (equal)
```

Passing Character Vectors

When using the function syntax to pass a character vector to a function, you must enclose the character vector in single quotes, (`'text'`). For example, to create a new folder called `myapptests`, use

```
mkdir('myapptests')
```

On the other hand, variables that contain character vectors do not need to be enclosed in quotes:

```
folder = 'myapptests';
mkdir(folder)
```

See Also

`mlint`

Topics

"Check Code for Errors and Warnings"

system

Execute operating system command and return output

Syntax

```
status = system(command)
[status,cmdout] = system(command)
[status,cmdout] = system(command,'-echo')
```

Description

`status = system(command)` calls the operating system to execute the specified command. The operation waits for the command to finish execution before returning the exit status of the command to the `status` variable.

`[status,cmdout] = system(command)` also returns the output of the command to `cmdout`. This syntax is most useful for commands that do not require user input, such as `dir`.

`[status,cmdout] = system(command,'-echo')` also displays (echoes) the command output in the MATLAB Command Window. This syntax is most useful for commands that require user input and that run correctly in the MATLAB Command Window.

Examples

Display Windows Operating System Command Status and Output

On a Windows system, display the current folder using the `cd` command.

```
command = 'cd';
[status,cmdout] = system(command)
```

```
status =
     0
cmdout =
```

```
C:\matlab\myfiles
```

A `status` of zero indicates that the command completed successfully. MATLAB returns a character vector containing the current folder in `cmdout`.

Save UNIX Command Exit Status and Output

List all users who are currently logged in, and save the command exit status and output. Then, view the status.

```
command = 'who';
[status,cmdout] = system(command);
status
```

```
status = 0
```

A `status` of zero indicates that the command completed successfully. MATLAB® returns a list of users in `cmdout`.

Input Arguments

`command` — Operating system command

character vector

Operating system command, specified as a character vector. The `command` executes in a system shell, which might not be the shell from which you started MATLAB.

Example: `'dir'`

Example: `'ls'`

Output Arguments

`status` — Command exit status

0 | nonzero integer

Command exit status, returned as either `0` or a nonzero integer. When the command is successful, `status` is `0`. Otherwise, `status` is a nonzero integer.

- If `command` includes the ampersand character (&), then `status` is the exit status when `command` starts
- If `command` does not include the ampersand character (&), then `status` is the exit status upon `command` completion.

`cmdout` — Output of operating system command
character vector

Output of the operating system command, returned as a character vector. The system shell might not properly represent non-Unicode characters.

Limitations

- MATLAB converts characters to the encoding that your operating system shell accepts. Output from the `command` is converted to the MATLAB encoding to be displayed in the command window. If you get unexpected results from the command, enter the `command` argument directly at the operating system prompt to see how the operating system treats your input.
- MS-DOS does not support UNC path names. Therefore, if the current folder uses a UNC path name, then running `system` with a DOS `command` that relies on the current folder fails. To work around this limitation, change the folder to a mapped drive before calling `system`.

Tips

- To execute the operating system command in the background, include the trailing character, &, in the `command` argument (for example, `'notepad &'` on a Windows platform, or `'emacs &'` on UNIX). The exit status is immediately returned to the `status` variable. This syntax is useful for console programs that require interactive user command input while they run, and that do not run correctly in the MATLAB Command Window.

  Note: If `command` includes the trailing & character, `cmdout` is empty.

- On a UNIX system, the `system` function redirects `stdin` to the invoked command, `command`, by default. This redirection also passes MATLAB script commands and the keyboard type-ahead buffer to the invoked command while the `system` function

executes. This behavior can lead to corrupted output when `system` does not complete execution immediately. To disable `stdin` and type-ahead redirection, include the formatted text `< /dev/null` in the call to the invoked command.

Algorithms

On UNIX, MATLAB uses a shell program to execute the given command. It determines which shell program to use by checking environment variables on your system. MATLAB first checks the `MATLAB_SHELL` variable, and if either empty or not defined, then checks `SHELL`. If `SHELL` is also empty or not defined, MATLAB uses `/bin/sh`.

See Also

See Also

`computer` | `dos` | `perl` | `unix`

Topics

"Run External Commands, Scripts, and Programs"
`!` (exclamation point)

External Websites

Why does the output of my FORTRAN script not show up in the MATLAB command window when I execute it using the SYSTEM function in MATLAB 7.14 (R2012a)?
On some Linux platforms, system might return partial results when called in a loop

Introduced before R2006a

table

Create table from workspace variables

Syntax

```
T = table(var1,...,varN)
T = table(var1,...,varN,Name,Value)
T = table
```

Description

`T = table(var1,...,varN)` creates a table from the input variables, `var1,...,varN` . Variables can be of different sizes and data types, but all variables must have the same number of rows.

For more information on creating and using the `table` data type, see "Tables".

`T = table(var1,...,varN,Name,Value)` includes additional options specified by one or more `Name,Value` pair arguments.

For example, you can specify row names or variable names to include in the table.

`T = table` creates an empty 0-by-0 table.

Examples

Create Table from Workspace Variables

Define workspace variables with the same number of rows.

```
LastName = {'Smith';'Johnson';'Williams';'Jones';'Brown'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];
```

Create a table, `T`, as a container for the workspace variables.

```
T = table(Age,Height,Weight,BloodPressure,...
    'RowNames',LastName)
```

```
T = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Smith       38     71        176       124      93
    Johnson     43     69        163       109      77
    Williams    38     64        131       125      83
    Jones       40     67        133       117      75
    Brown       49     64        119       122      80
```

`table` names the variables with the workspace variable names.

Create Table and Specify Variable Names

Create a table from arrays with different data types where each variable contains three rows.

```
T = table(categorical({'M';'F';'M'}),[45;32;34],...
    {'NY';'CA';'MA'},logical([1;0;0]),...
    'VariableNames',{'Gender' 'Age' 'State' 'Vote'})
```

```
T = 3×4 table
    Gender    Age    State    Vote
    ______    ___    _____    _____

    M         45     'NY'     true
    F         32     'CA'     false
    M         34     'MA'     false
```

`Gender` is a categorical array, `Age` is a double-precision array, `State` is a cell array of character vectors, and `Vote` is a logical array. You can use the function `summary` to print the data type and other information about the variables in the table.

Create Table with String Array as Variable

Starting in R2016b, you can create string arrays with the `string` function, and add string arrays as table variables.

```
FlightNum = [1261;547;3489];
```

```
Customer = string({'Jones';'Brown';'Smith'});
Date = datetime(2016,12,20:22)';
Rating = categorical({'Good';'Poor';'Fair'});
Comment = string({'Flight left on time, not crowded';...
                  'Late departure, ran out of dinner options';...
                  'Late, but only by half an hour. Otherwise fine.'});
T = table(FlightNum,Customer,Date,Rating,Comment)
```

```
T = 3×5 table
    FlightNum    Customer       Date        Rating                          Comment
    _________    ________    ___________    ______    ____________________________________

    1261         "Jones"     20-Dec-2016    Good      "Flight left on time, not crowdec
     547         "Brown"     21-Dec-2016    Poor      "Late departure, ran out of dinne
    3489         "Smith"     22-Dec-2016    Fair      "Late, but only by half an hour.
```

To use the text in a string array as row names, convert the string array to a cell array of character vectors. Then create a table with row names.

```
Customer = cellstr(Customer);
T = table(FlightNum,Date,Rating,Comment,'RowNames',Customer)
```

```
T = 3×4 table
             FlightNum       Date        Rating                          Comment
             _________    ___________    ______    ____________________________________

    Jones    1261         20-Dec-2016    Good      "Flight left on time, not crowded"
    Brown     547         21-Dec-2016    Poor      "Late departure, ran out of dinner c
    Smith    3489         22-Dec-2016    Fair      "Late, but only by half an hour. Oth
```

Build Table by Assigning Variables Individually

Create workspace variables containing snowfall totals on different dates at three locations. These variables are row vectors.

```
Date = {'12/25/11','1/2/12','1/23/12','2/7/12','2/15/12'};
location1 = [20 5 13 0 17];
location2 = [18 9 21 5 12];
location3 = [26 10 16 3 15];
```

One way to create a table from these variables is to call the `table` function with the syntax `T = table(Date',location1',location2',location3')`.

Because the workspace variables are row vectors, you must transpose them to put them into the table as column-oriented data. Therefore, the input arguments are expressions, not simple variables. As a result, `table` creates `T` with the default variable names `Var1`, `Var2`, `Var3`, and `Var4`. You can assign more meaningful names to `T.Properties.VariableNames` after you create `T`. But, it might be more convenient to create an empty table, and then add variables one at a time with new names.

Create an empty table. Transpose the workspace variables and add them to the table as column vectors. As part of assigning each workspace variable into `T`, provide a meaningful name for the table variable.

```
T = table;
T.Date = Date';
T.Natick = location1';
T.Boston = location2';
T.Worcester = location3'
```

```
T = 5×4 table
       Date       Natick    Boston    Worcester
    __________    ______    ______    _________

    '12/25/11'    20        18        26
    '1/2/12'       5         9        10
    '1/23/12'     13        21        16
    '2/7/12'       0         5         3
    '2/15/12'     17        12        15
```

- “Create and Work with Tables”
- “Modify Units, Descriptions and Table Variable Names”
- “Access Data in a Table”
- “Calculations on Tables”

Input Arguments

`var1,...,varN` — Input variables

arrays

Input variables, specified as arrays with the same number of rows. The input variables can be of different sizes and different data types.

Common input variables are numeric arrays, logical arrays, character arrays, structure arrays, or cell arrays. Input variables also can be objects that are arrays. Such an array must support indexing of the form `var(index1,...,indexN)`, where `index1` is a numeric or logical vector that corresponds to rows of the variable `var`. In addition, the array must implement both a `vertcat` method and a `size` method with a `dim` argument.

Example: `table([1:4]',ones(4,3,2),eye(4,2))` creates a table from variables with four rows, but different sizes.

Example: `table([1:3]', {'one';'two';'three'},categorical({'A';'B';'C'}))` creates a table from variables with three rows, but different data types.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'RowNames',{'row1','row2','row3'}` names the rows `row1`, `row2`, and `row3`.

`'RowNames'` — Row names

`{}` (default) | cell array of character vectors

Row names, specified as the comma-separated pair consisting of `'RowNames'` and a cell array of character vectors that are nonempty and distinct. The number of character vectors must equal the number of rows in the table.

`'VariableNames'` — Variable names

cell array of character vectors

Variable names, specified as the comma-separated pair consisting of `'VariableNames'` and a cell array of character vectors that are nonempty and distinct. The number of character vectors must equal the number of variables. The variable names that you assign must be valid MATLAB variable names. You can determine valid variable names using the function `isvarname`.

Output Arguments

T — Output table
table

Output table, returned as a table. The table can store metadata such as descriptions, variable units, variable names, and row names. For more information, see Table Properties.

Unless you specify the table variable names using the `VariableNames` name-value pair argument, the `table` function generates the variable names automatically. If an input argument is a variable in the current workspace, `table` uses that variable name as the table variable name. Otherwise, it generates a name from `Var` followed by an integer, such as `Var2`.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

The syntax `TT = table(T1,T2,...)` constructs a tall table from several tall arrays `T1,T2,...`. You can use the `'VariableNames'` name-value pair to specify variable names.

For more information, see “Tall Arrays”.

See Also

See Also
`array2table` | `cell2table` | `isvarname` | `readtable` | `struct2table` | `summary` | Table Properties | `tall` | `uitable`

Topics

"Create and Work with Tables"
"Modify Units, Descriptions and Table Variable Names"
"Access Data in a Table"
"Calculations on Tables"

Introduced in R2013b

table2array

Convert table to homogeneous array

Syntax

```
A = table2array(T)
```

Description

`A = table2array(T)` converts the table, `T`, to a homogeneous array, `A`.

Examples

Convert Table of Numeric Data to Array

Create a table, `T`, consisting of numeric data.

```
T = table([1;2;3],[2 8; 4 10; 6 12],[3 12 21; 6 15 24; 9 18 27],...
    'VariableNames',{'One' 'Two' 'Three'})
```

```
T = 3×3 table
    One      Two          Three
    ___    _______    _____________

    1      2     8    3    12    21
    2      4    10    6    15    24
    3      6    12    9    18    27
```

Convert table, `T`, to an array.

```
A = table2array(T)
```

```
A =

     1     2     8     3    12    21
     2     4    10     6    15    24
     3     6    12     9    18    27
```

A contains two columns from variable Two and three columns from variable Three.

Convert Numeric Subset of Table to Array

Define the numeric subset of a table to convert to an array.

Create a table with nonnumeric data in the first variable.

```
T = table(categorical({'M';'M';'F';'F';'F'}),[38;43;38;40;49],...
    [71;69;64;67;64],[176;163;131;133;119],...
    'VariableNames',{'Gender' 'Age' 'Height' 'Weight'})
```

```
T = 5×4 table
    Gender    Age    Height    Weight
    ______    ___    ______    ______

    M         38     71        176
    M         43     69        163
    F         38     64        131
    F         40     67        133
    F         49     64        119
```

Convert T(:,2:4) to an array.

```
A = table2array(T(:,2:4))
```

```
A =

    38    71   176
    43    69   163
    38    64   131
    40    67   133
    49    64   119
```

A does not include data from the variable Gender.

Convert Table with Three-Dimensional Variables to Array

Create a table, T, with two rows and three variables where each variable has three dimensions.

```
T = table(ones(2,1,3),2*ones(2,2,3),3*ones(2,3,3),...
    'VariableNames',{'One' 'Two' 'Three'})
```

```
T = 2×3 table
         One                Two                Three
    ______________     ______________     ______________

    [1x1x3 double]     [1x2x3 double]     [1x3x3 double]
    [1x1x3 double]     [1x2x3 double]     [1x3x3 double]
```

The size of the table is 2-by-3.

Convert table T to an array.

```
A = table2array(T)
```

```
A =

(:,:,1) =

     1     2     2     3     3     3
     1     2     2     3     3     3


(:,:,2) =

     1     2     2     3     3     3
     1     2     2     3     3     3


(:,:,3) =

     1     2     2     3     3     3
     1     2     2     3     3     3
```

The size of A is 2-by-6-by-3.

Input Arguments

T — Input table

table

Input table, specified as a table. All variables in T must have sizes and data types that are compatible for horizontal concatenation. Specifically, the size of all variable dimensions greater than 2 must match.

- If T is an m-byn table with variables that each have one column, then each variable becomes one column in A, and A is an m-by-n array.
- If T contains variables that consist of more than one column, those variables become multiple columns in A, and the size of A is greater than the size of T.
- If T contains variables with more than two dimensions, the number of dimensions of A is the same as the number of variable dimensions.

Tips

- `table2array` horizontally concatenates the variables in T to create A. If the variables in T are cell arrays, `table2array` does not concatenate their contents, and A is a cell array, equivalent to `table2cell(T)`. To create an array containing the contents of variables that are all cell arrays, use `cell2mat(table2cell(T))`.
- `table2array(T)` is equivalent to `T{:,:}`.

Algorithms

If T contains variables with different data types that are compatible for horizontal concatenation, `table2array` creates a homogeneous array, A, of the dominant data type. For example, if T contains `double` and `single` numeric data, `table2array(T)` returns an array with data type `single`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`array2table` | `table` | `table2cell` | `table2struct`

Topics

"Concatenating Objects of Different Classes"

Introduced in R2013b

table2cell

Convert table to cell array

Syntax

```
C = table2cell(T)
```

Description

`C = table2cell(T)` converts the table, `T`, to a cell array, `C`. Each variable in `T` becomes a column of cells in `C`.

Examples

Convert Table to Cell Array

Create a table, `T`, with five rows and three variables.

```
T = table(categorical({'M';'M';'F';'F';'F'}),[38;43;38;40;49],...
    [124 93;109 77; 125 83; 117 75; 122 80],...
    'VariableNames',{'Gender' 'Age' 'BloodPressure'},...
    'RowNames',{'Smith' 'Johnson' 'Williams' 'Jones' 'Brown'})
```

```
T = 5×3 table
                Gender    Age    BloodPressure
                ______    ___    _____________

    Smith       M         38     124      93
    Johnson     M         43     109      77
    Williams    F         38     125      83
    Jones       F         40     117      75
    Brown       F         49     122      80
```

Convert `T` to a cell array.

```
C = table2cell(T)
```

```
C = 5×3 cell array
```

```
    [M]    [38]    [1×2 double]
    [M]    [43]    [1×2 double]
    [F]    [38]    [1×2 double]
    [F]    [40]    [1×2 double]
    [F]    [49]    [1×2 double]
```

`C` is a 5-by-3 cell array.

Vertically concatenate the table property, `T.Properties.VariableNames`, with `C` to include column headings for the cell array.

```
[T.Properties.VariableNames;C]
```

```
ans = 6×3 cell array
    'Gender'    'Age'    'BloodPressure'
    [M     ]    [ 38]       [1×2 double]
    [M     ]    [ 43]       [1×2 double]
    [F     ]    [ 38]       [1×2 double]
    [F     ]    [ 40]       [1×2 double]
    [F     ]    [ 49]       [1×2 double]
```

`T.Properties.VariableNames` is a cell array of character vectors.

Input Arguments

`T` — Input table

table

Input table, specified as a table.

If `T` is an `m`-by`n` table, then `C` is an `m`-by-`n` cell array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`cell2table` | `table` | `table2array` | `table2struct`

Introduced in R2013b

table2struct

Convert table to structure array

Syntax

```
S = table2struct(T)
S = table2struct(T,'ToScalar',true)
```

Description

`S = table2struct(T)` converts the table, `T`, to a structure array, `S`. Each variable of `T` becomes a field in `S`. If `T` is an `m`-by-`n` table, then `S` is a `m`-by-1 structure array with `n` fields.

`S = table2struct(T,'ToScalar',true)` converts the table, `T`, to a scalar structure `S`. Each variable of `T` becomes a field in `S`. If `T` is a `m`-by-`n` table, then `S` has `n` fields, each of which has `m` rows.

Examples

Convert Table to Structure Array

Create a table, `T`, with five rows and three variables.

```
T = table(categorical({'M';'M';'F';'F';'F'}),[38;43;38;40;49],...
    [124 93;109 77; 125 83; 117 75; 122 80],...
    'VariableNames',{'Gender' 'Age' 'BloodPressure'})
```

```
T = 5×3 table
    Gender    Age    BloodPressure
    ______    ___    _____________

    M         38     124      93
    M         43     109      77
    F         38     125      83
    F         40     117      75
    F         49     122      80
```

Convert T to a structure array.

```
S = table2struct(T)
```

```
S = 5×1 struct array with fields:
    Gender
    Age
    BloodPressure
```

The structure is 5-by-1, corresponding to the five rows of the table, T. The three fields of S correspond to the three variables from T.

Display the field data for the first element of S.

```
S(1)
```

```
ans = struct with fields:
           Gender: M
              Age: 38
    BloodPressure: [124 93]
```

The information corresponds to the first row of the table.

Convert Table to Scalar Structure

Create a table, T, with five rows and three variables.

```
T = table(categorical({'M';'M';'F';'F';'F'}),[38;43;38;40;49],...
    [124 93;109 77; 125 83; 117 75; 122 80],...
    'VariableNames',{'Gender' 'Age' 'BloodPressure'})
```

```
T = 5×3 table
    Gender    Age    BloodPressure
    ______    ___    _____________

    M         38     124      93
    M         43     109      77
    F         38     125      83
    F         40     117      75
    F         49     122      80
```

Convert T to a scalar structure.

```
S = table2struct(T,'ToScalar',true)
```

```
S = struct with fields:
           Gender: [5×1 categorical]
              Age: [5×1 double]
    BloodPressure: [5×2 double]
```

The data in the fields of the scalar structure are 5-by-1, corresponding to the five rows in the table T.

Display the data for the field BloodPressure.

```
S.BloodPressure
```

```
ans =

   124    93
   109    77
   125    83
   117    75
   122    80
```

The structure field BloodPressure contains all of the data that was in the variable of the same name from table T.

Convert Table with Row Names to Structure

Create a table, T, that includes row names.

```
T = table(categorical({'M';'M';'F';'F';'F'}),[38;43;38;40;49],...
    [124 93;109 77; 125 83; 117 75; 122 80],...
    'VariableNames',{'Gender' 'Age' 'BloodPressure'},...
    'RowNames',{'Smith' 'Johnson' 'Williams' 'Jones' 'Brown'})
```

```
T = 5×3 table
                Gender    Age    BloodPressure
                ______    ___    _____________

    Smith       M         38     124      93
    Johnson     M         43     109      77
```

```
    Williams    F         38     125     83
    Jones       F         40     117     75
    Brown       F         49     122     80
```

Convert T to a scalar structure.

```
S = table2struct(T,'ToScalar',true)
```

```
S = struct with fields:
           Gender: [5×1 categorical]
              Age: [5×1 double]
    BloodPressure: [5×2 double]
```

Add a field for the row names from the table.

```
S.RowNames = T.Properties.RowNames
```

```
S = struct with fields:
           Gender: [5×1 categorical]
              Age: [5×1 double]
    BloodPressure: [5×2 double]
         RowNames: {5×1 cell}
```

If S is a nonscalar structure, use `[S.RowNames] = T.Properties.RowNames{:}` to include a field with the row names from the table.

Input Arguments

T — Input table

table

Input table, specified as a table.

See Also

See Also

struct2table | table | table2array | table2cell

Introduced in R2013b

table2timetable

Convert table to timetable

Syntax

```
TT = table2timetable(T)
TT = table2timetable(T,'RowTimes',timeVarName)
TT = table2timetable(T,'RowTimes',rowTimes)
```

Description

`TT = table2timetable(T)` converts the table `T` to a timetable. The first datetime or duration variable in `T` becomes the vector of row times of `TT`. The remaining variables of `T` become the variables of `TT`.

- If `T` is an `M`-by-`N` table without row names, then `TT` is an `M`-by-`(N-1)` timetable.
- If `T` is an `M`-by-`N` table with row names, then `table2timetable` assigns the row names of `T` to a variable of `TT`. As a result, `TT` is an `M`-by-`N` timetable.

For more information on creating and using timetables, see “Timetables”.

To create a timetable from data in a text or spreadsheet file, first use the `readtable` function to read the data to a table. Then convert the table to a timetable with `table2timetable`.

`TT = table2timetable(T,'RowTimes',timeVarName)` converts `T` to a timetable. `timeVarName` is the name of a variable in `T` that contains datetime or duration values, and that `table2timetable` assigns as the vector of row times of `TT`. `timeVarName` can be the name of any variable in `T` that contains datetime or duration values.

`TT = table2timetable(T,'RowTimes',rowTimes)` converts `T` to a timetable. `rowTimes` is an `M`-by-`1` vector of datetime or duration values. All of the variables of `T` become variables of `TT`.

Examples

Convert Table to Timetable

Convert a table that contains dates and times to a timetable.

Read power outage data from the file `outages.csv` to a table. The table contains both outage and restoration times.

```
T = readtable('outages.csv');
T(1:5,:)
```

```
ans = 5×6 table
      Region          OutageTime        Loss     Customers     RestorationTime
    ___________    ________________    ______    __________    ________________    ____

    'SouthWest'    2002-02-01 12:18    458.98    1.8202e+06    2002-02-07 16:50    'wi
    'SouthEast'    2003-01-23 00:49    530.14    2.1204e+05    NaT                 'wi
    'SouthEast'    2003-02-07 21:15     289.4    1.4294e+05    2003-02-17 08:14    'wi
    'West'         2004-04-06 05:44    434.81    3.4037e+05    2004-04-06 06:10    'eq
    'MidWest'      2002-03-16 06:18    186.44    2.1275e+05    2002-03-18 23:23    'se
```

Convert the table to a timetable. The first variable with times, `OutageTime`, becomes the time vector of `TT`.

```
TT = table2timetable(T);
TT(1:5,:)
```

```
ans = 5×5 timetable
       OutageTime         Region        Loss     Customers     RestorationTime
    ________________    ___________    ______    __________    ________________    ____

    2002-02-01 12:18    'SouthWest'    458.98    1.8202e+06    2002-02-07 16:50    'wi
    2003-01-23 00:49    'SouthEast'    530.14    2.1204e+05    NaT                 'wi
    2003-02-07 21:15    'SouthEast'     289.4    1.4294e+05    2003-02-17 08:14    'wi
    2004-04-06 05:44    'West'         434.81    3.4037e+05    2004-04-06 06:10    'eq
    2002-03-16 06:18    'MidWest'      186.44    2.1275e+05    2002-03-18 23:23    'se
```

Index into `TT` using row times from its time vector. You can treat the row times as labels that specify rows.

```
TT('2003-02-07 21:15',:)
```

```
ans = 1×5 timetable
       OutageTime          Region        Loss     Customers     RestorationTime          C
    ________________    ____________    ______    __________    ________________    _____

    2003-02-07 21:15    'SouthEast'    289.4    1.4294e+05    2003-02-17 08:14    'wint
```

Calculate the duration of power outages. Use dot syntax to extract the row times as a vector.

```
TT.OutageDuration = TT.RestorationTime - TT.OutageTime;
TT(1:5,:)
```

```
ans = 5×6 timetable
       OutageTime          Region         Loss     Customers     RestorationTime

    ________________    ____________    _______    __________    ________________    ____

    2002-02-01 12:18    'SouthWest'    458.98    1.8202e+06    2002-02-07 16:50    'wir
    2003-01-23 00:49    'SouthEast'    530.14    2.1204e+05    NaT                 'wir
    2003-02-07 21:15    'SouthEast'     289.4    1.4294e+05    2003-02-17 08:14    'wir
    2004-04-06 05:44    'West'         434.81    3.4037e+05    2004-04-06 06:10    'equ
    2002-03-16 06:18    'MidWest'      186.44    2.1275e+05    2002-03-18 23:23    'sev
```

Specify Table Variable as Row Times

Convert a table to a timetable and specify the table variable that becomes the time vector of the timetable.

Read power outage data from the file `outages.csv` to a table. The table contains both outage and restoration times.

```
T = readtable('outages.csv');
T(1:5,:)
```

```
ans = 5×6 table
      Region           OutageTime         Loss     Customers     RestorationTime

    ___________    ________________    _______    __________    ________________    ____

    'SouthWest'    2002-02-01 12:18    458.98    1.8202e+06    2002-02-07 16:50    'wir
    'SouthEast'    2003-01-23 00:49    530.14    2.1204e+05    NaT                 'wir
    'SouthEast'    2003-02-07 21:15     289.4    1.4294e+05    2003-02-17 08:14    'wir
    'West'         2004-04-06 05:44    434.81    3.4037e+05    2004-04-06 06:10    'equ
    'MidWest'      2002-03-16 06:18    186.44    2.1275e+05    2002-03-18 23:23    'sev
```

Convert the table to a timetable. Specify the second variable with dates and times, `RestorationTime`, as the time vector of the timetable.

```
TT = table2timetable(T,'RowTimes','RestorationTime');
TT(1:5,:)
```

```
ans = 5×5 timetable
     RestorationTime      Region          OutageTime        Loss     Customers
    ________________    ___________    ________________    ______    __________    ____

    2002-02-07 16:50    'SouthWest'    2002-02-01 12:18    458.98    1.8202e+06    'wi
    NaT                 'SouthEast'    2003-01-23 00:49    530.14    2.1204e+05    'wi
    2003-02-17 08:14    'SouthEast'    2003-02-07 21:15     289.4    1.4294e+05    'wi
    2004-04-06 06:10    'West'         2004-04-06 05:44    434.81    3.4037e+05    'eq
    2002-03-18 23:23    'MidWest'      2002-03-16 06:18    186.44    2.1275e+05    'se
```

Convert Table with Separate Time Vector

Convert a table to a timetable by adding a separate time vector that contains the row times. All the table variables become variables of the timetable.

```
Reading1 = [98;97.5;97.9;98.1;97.9];
Reading2 = [120;111;119;117;116];
T = table(Reading1,Reading2)
```

```
T = 5×2 table
    Reading1    Reading2
    ________    ________

      98        120
    97.5        111
    97.9        119
    98.1        117
    97.9        116
```

```
Time = [seconds(1):seconds(1):seconds(5)];
TT = table2timetable(T,'RowTimes',Time)
```

```
TT = 5×2 timetable
     Time    Reading1    Reading2
    _____    ________    ________
```

```
1 sec      98        120
2 sec    97.5        111
3 sec    97.9        119
4 sec    98.1        117
5 sec    97.9        116
```

- "Create Timetables"
- "Resample and Aggregate Data in Timetable"
- "Combine Timetables and Synchronize Their Data"
- "Select Timetable Data by Row Time and Variable Type"
- "Access Data in a Table"

Input Arguments

T — Input table
table

Input table.

Output Arguments

TT — Output timetable
timetable

Output timetable. The timetable can store metadata such as descriptions, variable units, variable names, and row times. For more information, see Timetable Properties.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`array2timetable` | `isvarname` | `summary` | `timetable` | `uitable`

Topics

“Create Timetables”
“Resample and Aggregate Data in Timetable”
“Combine Timetables and Synchronize Their Data”
“Select Timetable Data by Row Time and Variable Type”
“Access Data in a Table”
“Tables”
“Represent Dates and Times in MATLAB”

Introduced in R2016b

Table Properties

Access and modify table metadata properties

Description

A table, `T`, has properties that store metadata such as its variable names, row names, descriptions, and variable units. `T.Properties` returns a summary of all of the table properties.

You can access a property using `T.Properties.PropName`, where *T* is the name of the table and *PropName* is one of the table properties. For example, to access the `VariableDescriptions` property of a table named `Patients`, use `Patients.Properties.VariableDescriptions`.

You can modify a property value using `T.Properties.PropName = P` where *T* is the name of the table, *PropName* is one of the table properties, and *P* is the desired property value. For example, to modify the `VariableUnits` property of a table named `Patients`, use `Patients.Properties.VariableUnits = P` where *P* is a cell array of character vectors containing the specified information.

In contrast, you can access and modify variables within a table using `T.VarName` or `T.VarName = V`, where *T* is the name of the table, *VarName* is the name of the variable you want to access or modify, and *V* is the variable value you want.

Table Metadata

`VariableNames` — Variable names
cell array of character vectors

Variable names, specified as a cell array of character vectors that are nonempty and distinct. Variable names must be valid MATLAB variable names. The number of character vectors must equal the number of variables. MATLAB removes any leading or trailing white space from the character vectors.

If valid MATLAB identifiers are not available for use as variable names, MATLAB uses a cell array of `N` character vectors of the form `{'Var1' ... 'VarN'}` where *N* is the number of variables. You can determine valid MATLAB variable names using the function `isvarname`.

The variable names are visible when viewing the table and when using the `summary` function. Furthermore, you can use the variable names within parentheses, within curly braces, or with dot indexing to access table data.

Example

Create a table.

```
T = table({'M';'M';'F';'F';'F'},[38;43;38;40;49],...
          [71;69;64;67;64],[176;163;131;133;119])
```

```
T =

  5×4 table

    Var1    Var2    Var3    Var4
    ____    ____    ____    ____

    'M'     38      71      176
    'M'     43      69      163
    'F'     38      64      131
    'F'     40      67      133
    'F'     49      64      119
```

Modify variable names using the `Properties.VariableNames` property.

```
T.Properties.VariableNames = {'Gender' 'Age' 'Height' 'Weight'}
```

```
T =

  5×4 table

    Gender    Age    Height    Weight
    ______    ___    ______    ______

    'M'       38     71        176
    'M'       43     69        163
    'F'       38     64        131
    'F'       40     67        133
    'F'       49     64        119
```

Create a subtable. Include all rows, but subscript on `Age` and `Gender`.

```
T(:,{'Age','Gender'})
```

```
ans =

  5×2 table

    Age    Gender
    ___    ______

    38     'M'
    43     'M'
    38     'F'
    40     'F'
    49     'F'
```

Extract data from `T`. Use variable names within curly braces to extract the data from the variables `Height` and `Weight`.

```
T{:,{'Height','Weight'}}
```

```
ans =

    71   176
    69   163
    64   131
    67   133
    64   119
```

Extract data from the variable `Gender` using dot indexing.

```
T.Gender
```

```
ans =

  5×1 cell array

    'M'
```

```
    'M'
    'F'
    'F'
    'F'
```

Extract all data using the `Variables` property. `T.Variables` is equivalent to `T{:,:}`. However, this syntax concatenates the table variables together. The data types of the table variables must be data types that can be concatenated.

Copy `T` to `T2`, and delete `T2.Gender`. The remaining variables of `T2` are numeric. Concatenate them together into a numeric array using `T2.Variables`.

```
T2 = T;
T2.Gender = [];
T2.Variables
```

```
ans =

    38    71   176
    43    69   163
    38    64   131
    40    67   133
    49    64   119
```

`RowNames` — Row names
`{}` (default) | cell array of character vectors

Row names, specified as a cell array of character vectors that are nonempty and distinct. This property can be empty, but if not empty, the number of character vectors must equal the number of rows in the table. MATLAB removes any leading or trailing white space from the character vectors. The default property value is an empty cell array.

The row names are visible when you view the table. Furthermore, you can use the row names within parentheses or curly braces to access the table data.

Example

Create a table.

```
load patients
```

```
T = table(Gender,Age,Height,Weight,Smoker,Systolic,Diastolic);
```

Add row names using the `Properties.RowNames` property. By default, tables do not have row names, but you can add them at any time.

```
T.Properties.RowNames = LastName;
head(T)
```

```
ans =

  8×7 table

                 Gender     Age    Height    Weight    Smoker    Systolic    Diastolic
                ________    ___    ______    ______    ______    ________    _________

    Smith       'Male'      38     71        176       true      124         93
    Johnson     'Male'      43     69        163       false     109         77
    Williams    'Female'    38     64        131       false     125         83
    Jones       'Female'    40     67        133       false     117         75
    Brown       'Female'    49     64        119       false     122         80
    Davis       'Female'    46     68        142       false     121         70
    Miller      'Female'    33     64        142       true      130         88
    Wilson      'Male'      40     68        180       false     115         82
```

Create a subtable. Include all variables, but subscript on a subset of row names.

```
T({'Smith','Williams'},:)
```

```
ans =

  2×7 table

                 Gender     Age    Height    Weight    Smoker    Systolic    Diastolic
                ________    ___    ______    ______    ______    ________    _________

    Smith       'Male'      38     71        176       true      124         93
    Williams    'Female'    38     64        131       false     125         83
```

`DimensionNames` — Dimension names

`{'Row' 'Variables'}` (default) | two-element cell array of character vectors

Dimension names, specified as a two-element cell array of character vectors.

Example

Create a table. Modify the names of its dimensions using the `Properties.DimensionNames` property.

```
load patients
T = table(Gender,Age,Height,Weight,Smoker,Systolic,Diastolic,...
          'RowNames',LastName);
T.Properties.DimensionNames = {'Patient' 'Data'};
T.Properties
```

```
ans =

  struct with fields:

             Description: ''
                UserData: []
          DimensionNames: {'Patient'  'Data'}
           VariableNames: {1×7 cell}
     VariableDescriptions: {}
           VariableUnits: {}
                RowNames: {100×1 cell}
```

`Description` — Table description

`''` (default) | character vector

Table description, specified as a character vector. This description is visible when using the `summary` function.

Example

Create a table. Modify the description of the table. Display a summary of the result.

```
load patients
T = table(Gender,Age,Height,Weight);
T.Properties.Description = 'Simulated patient data';
summary(T)
```

```
Description:  Simulated patient data
```

```
Variables:

    Gender: 100×1 cell array of character vectors

    Age: 100×1 double

        Values:

            Min       25
            Median    39
            Max       50

    Height: 100×1 double

        Values:

            Min       60
            Median    67
            Max       72

    Weight: 100×1 double

        Values:

            Min         111
            Median    142.5
            Max         202
```

`VariableDescriptions` — Variable descriptions
`{}` (default) | cell array of character vectors

Variable descriptions, specified as a cell array of character vectors. This property can be an empty cell array, which is the default. If the cell array is not empty, the number of character vectors must equal the number of variables. You can specify an individual empty character vector within the cell array for a variable that does not have a description.

The variable descriptions are visible when using the `summary` function.

Example

Create a table. Modify the variable descriptions. Display a summary of the result.

```
load patients
T = table(Gender,Age,Height,Weight,Smoker,Systolic,Diastolic);
T.Properties.VariableDescriptions = {'' '' '' '' ...
                                     'Has the patient ever been a smoker' ...
                                     'Systolic Pressure' 'Diastolic Pressure'};
summary(T)
```

```
Variables:

    Gender: 100×1 cell array of character vectors

    Age: 100×1 double

        Values:

            Min       25
            Median    39
            Max       50

    Height: 100×1 double

        Values:

            Min       60
            Median    67
            Max       72

    Weight: 100×1 double

        Values:

            Min         111
            Median    142.5
            Max         202

    Smoker: 100×1 logical

        Description:  Has the patient ever been a smoker
        Values:

            True     34
            False    66

    Systolic: 100×1 double
```

```
        Description:  Systolic Pressure
        Values:

            Min       109
            Median    122
            Max       138

    Diastolic: 100×1 double

        Description:  Diastolic Pressure
        Values:

            Min         68
            Median    81.5
            Max         99
```

`VariableUnits` — Variable units

{} (default) | cell array of character vectors

Variable units, specified as a cell array of character vectors. This property can be an empty cell array, which is the default. If the cell array is not empty, the number of character vectors must equal the number of variables. You can specify an individual empty character vector within the cell array for a variable that does not have units.

The variable units are visible when using the `summary` function.

Example

Create a table. Modify the variable units. Display a summary of the result.

```
load patients
T = table(Gender,Age,Height,Weight,Smoker,Systolic,Diastolic);
T.Properties.VariableUnits = {'' 'Yrs' 'In' 'Lbs' '' 'mm Hg' 'mm Hg'};
summary(T)
```

```
Variables:

    Gender: 100×1 cell array of character vectors

    Age: 100×1 double
```

```
    Units:  Yrs
    Values:

        Min       25
        Median    39
        Max       50

Height: 100×1 double

    Units:  In
    Values:

        Min       60
        Median    67
        Max       72

Weight: 100×1 double

    Units:  Lbs
    Values:

        Min         111
        Median    142.5
        Max         202

Smoker: 100×1 logical

    Values:

        True     34
        False    66

Systolic: 100×1 double

    Units:  mm Hg
    Values:

        Min       109
        Median    122
        Max       138

Diastolic: 100×1 double
```

```
        Units:  mm Hg
        Values:

            Min         68
            Median    81.5
            Max         99
```

`UserData` — Additional table information

[ ] (default) | variable containing information in any data type

Additional table information, specified as a variable containing information in any data type.

Example

Create a table. Attach an anonymous function as a piece of user data that is associated with the table.

```
load patients
T = table(Gender,Age,Height,Weight,Smoker,Systolic,Diastolic);
formula = @(x) x.^2;
T.Properties.UserData = formula;
T.Properties
```

```
ans =

  struct with fields:

             Description: ''
                UserData: @(x)x.^2
          DimensionNames: {'Row'  'Variables'}
           VariableNames: {1×7 cell}
    VariableDescriptions: {}
           VariableUnits: {}
                RowNames: {}
```

See Also

See Also

`isvarname` | `summary` | `table`

Topics

"Access Data in a Table"

Introduced in R2013b

tabularTextDatastore

Create TabularTextDatastore object for collections of tabular text data

Syntax

```
ttds = tabularTextDatastore(location)
ttds = tabularTextDatastore(location,Name,Value)
```

Description

`ttds = tabularTextDatastore(location)` creates a datastore from the collection of data specified by `location`. A datastore is a repository for collections of data that are too large to fit in memory. After creating a `TabularTextDatstore` object, you can read and process the data in various ways. For more information, see TabularTextDatastore.

`ttds = tabularTextDatastore(location,Name,Value)` additional parameters for `ttds` using one or more name-value pair arguments. For example, `tabularTextDatastore(location,'FileExtensions',{'.txt','.csv'})` creates a datastore from only the files in `location` with extensions `.text` and `.csv`.

Examples

Create TabularTextDatastore Object

Create a `TabularTextDatastore` object containing the text file `airlinesmall.csv`.

```
ttds = tabularTextDatastore('airlinesmall.csv')
```

```
ttds 

  TabularTextDatastore with properties:

                      Files: {
                             ' ...\matlab\toolbox\matlab\demos\airlinesmall.csv'
                             }
                FileEncoding: 'UTF-8'
           ReadVariableNames: true
```

```
            VariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}

  Text Format Properties:
           NumHeaderLines: 0
                Delimiter: ','
            RowDelimiter: '\r\n'
           TreatAsMissing: ''
            MissingValue: NaN

  Advanced Text Format Properties:
          TextscanFormats: {'%f', '%f', '%f' ... and 26 more}
       ExponentCharacters: 'eEdD'
             CommentStyle: ''
               Whitespace: ' \b\t'
  MultipleDelimitersAsOne: false

  Properties that control the table returned by preview, read, readall:
    SelectedVariableNames: {'Year', 'Month', 'DayofMonth' ... and 26 more}
          SelectedFormats: {'%f', '%f', '%f' ... and 26 more}
                 ReadSize: 20000 rows
```

Input Arguments

`location` — Files or folders to include in the datastore

character vector | cell array of character vectors

Files or folders to include in the datastore, specified as a character vector or cell array of character vectors. If the files are not in the current folder, then `location` must be full or relative paths. Files within subfolders of the specified folder are not automatically included in the datastore.

You can use the wildcard character (*) when specifying `location`. This character indicates that all matching files or all files in the matching folders are included in the datastore.

If the files are not available locally, then the full path of the files or folders must be an internationalized resource identifier (IRI) of the form `hdfs://`*`hostname`*`:`*`portnumber`*`/`*`path_to_file`*.

For information on using `datastore` with Amazon S3 and HDFS, see “Read Remote Data”.

Note: When reading from HDFS or when reading Sequence files locally, the `datastore` function calls the `javaaddpath` command. This command does the following:

- Clears the definitions of all Java classes defined by files on the dynamic class path
- Removes all global variables and variables from the base workspace
- Removes all compiled scripts, functions, and MEX-functions from memory

To prevent persistent variables, code files, or MEX-files from being cleared, use the `mlock` function.

When `location` represents a folder, the datastore includes only supported text file formats and ignores any other format. Supported file formats have the extension `.txt`, `.csv`, `.dat`, `.dlm`, `.asc`, `.text`, or no extension.

Example: `'file1.csv'`

Example: `'../dir/data/file1'`

Example: `{'C:\dir\data\file1.csv','C:\dir\data\file2.dat'}`

Example: `'C:\dir\data\*.text'`

Data Types: `char` | `cell`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `ttds = tabularTextDatastore('C:\dir\textdata','FileExtensions',{'.csv','.txt'})`

`'IncludeSubfolders'` — Subfolder inclusion flag

`true` or `false` | 0 or 1

Subfolder inclusion flag, specified as the comma-separated pair consisting of `'IncludeSubfolders'` and `true`, `false`, 0, or 1. Specify `true` to include all files and subfolders within each folder or `false` to include only the files within each folder.

When you do not specify `'IncludeSubfolders'`, then the default value is `false`.

Example: `'IncludeSubfolders',true`

Data Types: `logical` | `double`

`'FileExtensions'` — Text file extensions
character vector | cell array of character vectors

Text file extensions, specified as the comma-separated pair consisting of `'FileExtensions'` and a character vector or cell array of character vectors. The specified extensions do not require a supported format. If you want to include unsupported extensions, then specify all extensions. Use empty quotes `''` to represent files without extensions.

Example: `'FileExtensions','.txt'`

Example: `'FileExtensions',{'.text','.csv'}`

Data Types: `char` | `cell`

`'DatetimeType'` — Type for imported date and time data
`'datetime'` (default) | `'text'`

Type for imported date and time data, specified as the comma-separated pair consisting of `'DatetimeType'` and one of these values: `'datetime'` or `'text'`.

Value	Type for Imported Date and Time Data
`'datetime'`	MATLAB `datetime` data type For more information, see `datetime`.
`'text'`	If `'DatetimeType'` is specified as `'text'`, then the type for imported date and time data depends on the value specified in the `'TextType'` property: • If `'TextType'` is `'char'`, then the `tabularTextdatastore` imports dates as a cell array of character vectors. • If `'TextType'` is `'string'`, then the `tabularTextdatastore` imports dates as an array of strings.

If the specified `TextscanFormats` property contains a `%D`, then the `tabularTextdatastore` ignores the value specified in `DatetimeType`.

Example: `'DatetimeType','datetime'`

In addition to these name-value pairs, you also can specify any of the properties on the TabularTextDatastore Properties page as name-value pairs, except for the `Files` property.

Output Arguments

`ttds` — Tabular text datastore
`TabularTextDatastore` object

Datastore for a tabular text file collection, returned as a `TabularTextDatastore` object. The `Files` property is a cell array of character vectors, where each character vector is an absolute path to a file resolved from the `location` argument. See TabularTextDatastore for more information.

See Also

See Also
`datastore` | `mapreduce` | `tall`

Topics
"Getting Started with Datastore"
"Read Remote Data"

Introduced in R2016a

TabularTextDatastore Properties

Access and modify `TabularTextDatastore` properties

Description

`TabularTextDatastore` properties describe the files associated with a `TabularTextDatastore` object. Specifically, the properties describe the format of the data in the files and control how the data should be read from the datastore. By changing property values, you can modify certain aspects of the datastore. Use dot notation to view or modify a particular property of a `TabularTextDatastore` object:

```
ds = datastore('airlinesmall.csv');
ds.TreatAsMissing = 'NA';
ds.MissingValue = 0;
```

You also can specify the value of `TabularTextDatastore` properties using name-value pair arguments when you create a datastore using the `datastore` function:

```
ds = datastore('airlinesmall.csv','TreatAsMissing','NA',...
    'MissingValue',0)
```

The first file specified by the `Files` property determines the variable names and format information. The `datastore` function reevaluates this information when you change any of the following properties of a `TabularTextDatastore`:

`Files`	`Delimiter`	`CommentStyle`
`FileEncoding`	`RowDelimiter`	`Whitespace`
`ReadVariableNames`	`TreatAsMissing`	`MultipleDelimitersAsOne`
`NumHeaderLines`		

File Properties

`Files` — Files included in datastore

cell array of character vectors

Files included in the datastore, resolved as a cell array of character vectors, where each character vector is a full path to a file. The `location` argument in the `tabularTextDatastore` and `datastore` functions define these files.

The first file specified by the `Files` property determines the variable names and format information for all files in the datastore.

Example: `{'C:\dir\data\mydata1.csv';'C:\dir\data\mydata2.csv'}`

`FileEncoding` — File encoding

`'UTF-8'` (default) | character vector

File encoding, specified as one of the following:

`'IBM866'`	`'ISO-8859-1'`	`'windows-847'`
`'KOI8-R'`	`'ISO-8859-2'`	`'windows-1250'`
`'KOI8-U'`	`'ISO-8859-3'`	`'windows-1251'`
`'Macintosh'`	`'ISO-8859-4'`	`'windows-1252'`
`'US-ASCII'`	`'ISO-8859-5'`	`'windows-1253'`
`'UTF-8'`	`'ISO-8859-6'`	`'windows-1254'`
	`'ISO-8859-7'`	`'windows-1255'`
	`'ISO-8859-8'`	`'windows-1256'`
	`'ISO-8859-9'`	`'windows-1257'`
	`'ISO-8859-11'`	`'windows-1258'`
	`'ISO-8859-13'`	
	`'ISO-8859-15'`	

If each file in the datastore fits into memory, then `FileEncoding` also can be one of the following:

`'Big5'`	`'EUC-KR'`	`'GB18030'`	`'Shift_JIS'`
`'Big5-HKSCS'`	`'EUC-JP'`	`'GB2312'`	`'windows-949'`
`'CP949'`	`'EUC-TW'`	`'GBK'`	

`ReadVariableNames` — Indicator for reading first row of first file as variable names

logical `true` or `false` | `1` | `0`

Indicator for reading first row of the first file in the datastore as variable names, specified as either `true` (`1`) or `false` (`0`).

- If unspecified, the `tabularTextDatastore` function detects the presence of variable names automatically.

- If `true`, then the first nonheader row of the first file determines the variable names for the data.
- If `false`, then the first nonheader row of the first file contains the first row of data. The data is assigned default variable names, `Var1`, `Var2`, and so on.

Data Types: `logical`

`VariableNames` — Names of variables

cell array of character vectors

Names of variables in the datastore, specified as a cell array of character vectors. Specify the variable names in the order in which they appear in the files. If you do not specify the variable names, they are detected from the first nonheader line in the first file of the datastore. When modifying the `VariableNames` property, the number of new variable names must match the number of original variable names.

If `ReadVariableNames` is `false`, then `VariableNames` defaults to `{'Var1','Var2', ...}`.

Example: `{'Time','Name','Quantity'}`

Text Format Properties

`NumHeaderLines` — Number of lines to skip at beginning of file

non-negative integer

Number of lines to skip at the beginning of the file, specified as a non-negative integer. If unspecified, the `tabularTextDatastore` function detects the number of lines to skip automatically.

The `tabularTextDatastore` function ignores the specified number of header lines before reading the variable names or data.

Data Types: `double`

`Delimiter` — Field delimiter characters

character vector | cell array of character vectors

Field delimiter characters, specified as a character vector or a cell array of character vectors. Specify multiple delimiters in a cell array of character vectors. If unspecified, the `tabularTextDatastore` function detects the delimiter automatically.

Example: `'|'`

Example: `{';','*'}`

Repeated delimiter characters in a file are interpreted as separate delimiters with empty fields between them. If unspecified, the read function detects the delimiter automatically by default.

When you specify one of the following escape sequences as a delimiter, it is converted to the corresponding control character:

`\b`	Backspace
`\n`	Newline
`\r`	Carriage return
`\t`	Tab
`\\`	Backslash (\)

`RowDelimiter` — Row delimiter character

`\r\n` (default) | character vector

Row delimiter character, specified as a character vector that must be either a single character or one of `'\r'`, `'\n'`, or `'\r\n'`.

Example: `':'`

`TreatAsMissing` — Numeric values to treat as missing values

`''` (default) | character vector | cell array of character vectors

Numeric values to treat as missing values, specified as a single character vector or cell array of character vectors. Values specified as `TreatAsMissing` are substituted with the value defined in the `MissingValue` property. For instance, if `MissingValue` is defined to be a `NaN`, and the `TreatAsMissing` is specified as `'NA'`. Then, in the imported data, all occurrences of `'NA'` are replaced by `NaN`.

Note: This option only applies to numeric fields. Also, this property is equivalent to the `TreatAsEmpty` name-value pair argument for the `textscan` function.

Example: `'NA'`

Example: `'-99'`

Example: `{'-',''}`

Data Types: `char` | `cell`

`MissingValue` — Value for missing numeric fields

`NaN` (default) | scalar

Value for missing numeric fields in delimited text files, specified as a scalar. This property is equivalent to the `EmptyValue` name-value pair argument for the `textscan` function.

Data Types: `double`

Advanced Text Format Properties

`TextscanFormats` — Format of the data fields

cell array of character vectors

Format of the data fields, specified as a cell array of character vectors, where each character vector contains one conversion specifier.

When you specify or modify the `TextscanFormats` property, you can use the same conversion specifiers that the `textscan` function accepts for the `formatSpec` argument. This includes specifiers that skip fields using an asterisk (*) character and specifiers that skip literal text. The number of conversion specifiers must match the number of variables in the `VariableNames` property.

If the value of `TextscanFormats` includes conversion specifiers that skip fields using asterisk characters (*), then the value of the `SelectedVariableNames` property automatically updates. MATLAB uses the `%*q` conversion specifier to skip fields omitted by the `SelectedVariableNames` property and treats the field contents as literal character vectors. For fixed width files, indicate a skipped field using the appropriate conversion specifier along with the field width. For example, `%*52c` skips a field that contains 52 characters.

If you do not specify a value for `TextscanFormats`, then `datastore` determines the format of the data fields by scanning text from the first nonheader line in the first file of the datastore.

Example: `{'%s','%s','%f'}`

`ExponentCharacters` — Exponent characters

`'eEdD'` (default) | character vector

Exponent characters, specified as a character vector. The default exponent characters are `e`, `E`, `d`, and `D`.

`CommentStyle` — Style of comments

`''` (default) | character vector | cell array of character vectors

Style of comments in the file, specified as a character vector or cell array of character vectors.

For example, specify `'%'` to ignore characters following the text on the same line. Specify `{'/*','*/'}` to ignore characters between the text.

When reading from a `TabularTextDatastore`, the `read` function checks for comments only at the start of each field, not within a field.

Example: `'CommentStyle',{'/*', '*/'}`

Data Types: `char` | `cell`

`Whitespace` — White-space characters

`' \b\t'` (default) | character vector

White-space characters, specified as a character vector of one or more characters.

When you specify one of the following escape sequences as any white-space character, `datastore` converts that sequence to the corresponding control character:

`\b`	Backspace
`\n`	Newline
`\r`	Carriage return
`\t`	Tab
`\\`	Backslash (\)

Example: `' \b\t'`

Data Types: `char`

`MultipleDelimitersAsOne` — Multiple delimiter handling

`0 (false)` (default) | `1 (true)`

Multiple delimiter handling, specified as either `true` or `false`. If `true`, then `datastore` treats consecutive delimiters as a single delimiter. Repeated delimiters separated by white-space are also treated as a single delimiter.

Properties for `preview`, `read`, `readall` Table

`SelectedVariableNames` — Variables to read

cell array of character vectors

Variables to read from the file, specified as a cell array of character vectors, where each character vector contains the name of one variable. You can specify the variable names in any order.

Example: `{'Var3','Var7','Var4'}`

`SelectedFormats` — Formats of selected variables

cell array of character vectors

Formats of the selected variables to read, specified as a cell array of character vectors, where each character vector contains one conversion specifier. The variables to read are indicated by the `SelectedVariableNames` property. The number of character vectors in `SelectedFormats` must match the number of variables to read.

You can use the same conversion specifiers that the `textscan` function accepts, including specifiers that skip literal text. However, you cannot use a conversion specifier that skips a field. That is, the conversion specifier cannot include an asterisk character (*).

Example: `{'%d','%d'}`

`ReadSize` — Amount of data to read

20000 (default) | positive scalar | `'file'`

Amount of data to read in a call to the `read` function, specified as a positive scalar or `'file'`.

- If `ReadSize` is a positive integer, then each call to `read` reads at most `ReadSize` rows.
- If `ReadSize` is `'file'`, then each call to `read` reads all of the data in one file.

When you change `ReadSize` from a numeric scalar to `'file'` or vice versa, MATLAB resets the datastore to the state where no data has been read from it.

`TextType` — Output data type of text variables

`'char'` (default) | `'string'`

Output data type of text variables, specified as `'char'` or `'string'`. `TextType` specifies the data type of text variables formatted with `%s`, `%q`, or `[...]`. If `TextType` is `'char'`, then the output is a cell array of character vectors. If `TextType` is `'string'`, then the output has type `string`.

See Also

See Also

`datastore` | `reset` | `textscan`

Topics

TabularTextDatastore

tail

Get bottom rows of table, timetable, or tall array

Syntax

```
B = tail(A)
B = tail(A,k)
```

Description

`B = tail(A)` returns the last eight rows of table or timetable `A`.

`B = tail(A,k)` returns the last `k` rows of `A`.

Examples

Preview Table

Create a table that contains 100 rows and five variables.

```
load patients
T = table(LastName,Gender,Age,Height,Weight);
size(T)
```

```
ans =

   100     5
```

Preview the last eight rows.

```
T2 = tail(T)
```

```
T2 = 8×5 table
     LastName       Gender     Age    Height    Weight
    ___________    ________    ___    ______    ______
```

```
    'Foster'        'Female'    30     70        124
    'Gonzales'      'Male'      48     71        174
    'Bryant'        'Female'    48     66        134
    'Alexander'     'Male'      25     69        171
    'Russell'       'Male'      44     69        188
    'Griffin'       'Male'      49     70        186
    'Diaz'          'Male'      45     68        172
    'Hayes'         'Male'      48     66        177
```

Preview Contents of Tall Table

Create a tall table and preview the bottom few rows of data.

Create a tall table for the `airlinesmall.csv` data set. Select a subset of the variables to work with. Use `tail` to extract the last few rows of data.

```
varnames = {'Year','Month','ArrDelay','DepDelay','UniqueCarrier'};
ds = datastore('airlinesmall.csv','TreatAsMissing','NA',...
    'SelectedVariableNames',varnames);
T = tall(ds)
```

```
T =

  M×5 tall table

    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    1987    10        8          12          'PS'
    1987    10        8           1          'PS'
    1987    10       21          20          'PS'
    1987    10       13          12          'PS'
    1987    10        4          -1          'PS'
    1987    10       59          63          'PS'
    1987    10        3          -2          'PS'
    1987    10       11          -1          'PS'
    :       :        :           :           :
    :       :        :           :           :
```

```
tt = tail(T)
```

```
tt =
```

```
  M×5 tall table

    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    ?       ?        ?           ?           ?
    ?       ?        ?           ?           ?
    ?       ?        ?           ?           ?
    :       :        :           :           :
    :       :        :           :           :
```

Collect the results into memory to view the data.

```
last_rows = gather(tt)
```

```
Evaluating tall expression using the Local MATLAB Session:

- Pass 1 of 1: Completed in 0 sec

Evaluation completed in 0 sec

last_rows = 8×5 table
    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    2008    12        14          1          'DL'
    2008    12        -8         -1          'DL'
    2008    12         1          9          'DL'
    2008    12        -8         -4          'DL'
    2008    12        15         -2          'DL'
    2008    12       -15         -1          'DL'
    2008    12       -12          1          'DL'
    2008    12        -1         11          'DL'
```

Retrieve Specified Number of Rows in Tall Array

Preview the last 20 rows of data in a tall table.

Create a tall table for the `airlinesmall.csv` data set. Select a subset of the variables to work with, and treat `'NA'` values as missing data so that `datastore` replaces them with `NaN` values. Use `tail` to view the last 20 rows of data.

```
varnames = {'Year','Month','ArrDelay','DepDelay','UniqueCarrier'};
```

```
ds = datastore('airlinesmall.csv','TreatAsMissing','NA',...
    'SelectedVariableNames',varnames);
T = tall(ds)
```

```
T =

  M×5 tall table

    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    1987    10        8          12          'PS'
    1987    10        8           1          'PS'
    1987    10       21          20          'PS'
    1987    10       13          12          'PS'
    1987    10        4          -1          'PS'
    1987    10       59          63          'PS'
    1987    10        3          -2          'PS'
    1987    10       11          -1          'PS'
    :       :        :           :           :
    :       :        :           :           :
```

```
tt = tail(T,20)
```

```
tt =

  M×5 tall table

    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    ?       ?        ?           ?           ?
    ?       ?        ?           ?           ?
    ?       ?        ?           ?           ?
    :       :        :           :           :
    :       :        :           :           :
```

Collect the results into memory to view the data.

```
b20 = gather(tt)
```

```
Evaluating tall expression using the Local MATLAB Session:

- Pass 1 of 1: Completed in 0 sec
```

```
Evaluation completed in 1 sec

b20 = 20×5 table
    Year    Month    ArrDelay    DepDelay    UniqueCarrier
    ____    _____    ________    ________    _____________

    2008    12         0         -4          'CO'
    2008    12       -16         13          'CO'
    2008    12        17         -3          'CO'
    2008    12         3         -5          'CO'
    2008    12         2          6          'DL'
    2008    12         6         -2          'DL'
    2008    12        37         35          'DL'
    2008    12        -1         -6          'DL'
    2008    12        39         12          'DL'
    2008    12        -3         -6          'DL'
    2008    12        -6         -1          'DL'
    2008    12        -2          1          'DL'
    2008    12        14          1          'DL'
    2008    12        -8         -1          'DL'
    2008    12         1          9          'DL'
    2008    12        -8         -4          'DL'
    2008    12        15         -2          'DL'
    2008    12       -15         -1          'DL'
    2008    12       -12          1          'DL'
    2008    12        -1         11          'DL'
```

Input Arguments

A — Input array

table | timetable

Input array, specified as a table or timetable.

Data Types: `table` | `timetable`

k — Number of rows to extract

scalar

Number of rows to extract, specified as a positive scalar integer. If A has fewer than k rows, then `tail` returns all of A.

Output Arguments

B — Requested rows
table | timetable

Requested rows, returned as a table or timetable. The data type of B is the same as A.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

You can use `head` and `tail` with tall arrays of any valid underlying data type (`single`, `double`, `int8`, `datetime`, `table`, and so on).

If you are unsure whether the result returned by `gather(A)` will fit in memory, then use `gather(head(A))` or `gather(tail(A))`. These commands still fully evaluate the tall array A, but only return a small subset of the result in memory.

See Also

See Also
`gather` | `head` | `table` | `tall` | `timetable` | `topkrows`

Topics
"Index and View Tall Array Elements"

Introduced in R2016b

tall

Create tall array

Syntax

```
t = tall(ds)
t = tall(A)
```

Description

`t = tall(ds)` creates a tall array on top of datastore `ds`.

- If `ds` is a datastore for tabular data (so that the `read` and `readall` methods of datastore return tables), then `t` is a tall table. Tabular data is data that is arranged in a rectangular fashion with each row having the same number of entries.
- Otherwise, `t` is a tall cell array.

`t = tall(A)` converts the in-memory array `A` into a tall array. The underlying data type of `t` is the same as `class(A)`.

Examples

Create Tall Array

Convert a datastore into a tall array.

First, create a datastore for the data set. You can specify either a full or relative file location for the data set using `datastore(location)` to create the datastore. The `location` argument can specify:

- A single file, such as `'airlinesmall.csv'`
- Several files with the same extension, such as `'*.csv'`
- An entire folder of files, such as `'C:\MyData'`

`datastore` also has several options to specify file and text format properties when you create the datastore.

Create a datastore for the `airlinesmall.csv` data set. Treat `'NA'` values as missing data so that they are replaced with `NaN` values. Select a small subset of the variables to work with.

```
varnames = {'ArrDelay', 'DepDelay', 'Origin', 'Dest'};
ds = datastore('airlinesmall.csv', 'TreatAsMissing', 'NA', ...
    'SelectedVariableNames', varnames);
```

Use `tall` to create a tall array for the data in the datastore. Since the data in `ds` is tabular, the result is a tall table. If the data is not tabular, then `tall` creates a tall cell array instead.

```
T = tall(ds)
```

```
T =

  M×4 tall table

    ArrDelay    DepDelay    Origin    Dest
    ________    ________    ______    _____

     8           12          'LAX'     'SJC'
     8            1          'SJC'     'BUR'
    21           20          'SAN'     'SMF'
    13           12          'BUR'     'SJC'
     4           -1          'SMF'     'LAX'
    59           63          'LAX'     'SJC'
     3           -2          'SAN'     'SFO'
    11           -1          'SEA'     'LAX'
    :            :           :         :
    :            :           :         :
```

You can use many common MATLAB® operators and functions to work with tall arrays. For a list of supported functions, see:

- "Functions That Support Tall Arrays (A–Z)"

Calculate Size of Tall Array

Convert a datastore into a tall table, calculate its size using a deferred calculation, and then perform the calculation and return the result in memory.

First, create a datastore for the `airlinesmall.csv` data set. Treat `'NA'` values as missing data so that they are replaced with `NaN` values. Set the text format of a few columns so that they are read as a cell array of character vectors. Convert the datastore into a tall table.

```
ds = datastore('airlinesmall.csv', 'TreatAsMissing', 'NA');
ds.SelectedFormats{strcmp(ds.SelectedVariableNames, 'TailNum')} = '%s';
ds.SelectedFormats{strcmp(ds.SelectedVariableNames, 'CancellationCode')} = '%s';
```

```
T = tall(ds)
```

```
T =

  M×29 tall table

    Year    Month    DayofMonth    DayOfWeek    DepTime    CRSDepTime    ArrTime    CRS
    ____    _____    __________    _________    _______    __________    _______    ___

    1987    10       21            3             642        630           735        72
    1987    10       26            1            1021       1020          1124       111
    1987    10       23            5            2055       2035          2218       215
    1987    10       23            5            1332       1320          1431       141
    1987    10       22            4             629        630           746        74
    1987    10       28            3            1446       1343          1547       144
    1987    10        8            4             928        930          1052       104
    1987    10       10            6             859        900          1134       112
    :       :        :             :            :          :             :          :
    :       :        :             :            :          :             :          :
```

The display of the tall table indicates that MATLAB® does not yet know how many rows of data are in the table.

Calculate the size of the tall table. Since calculating the size of a tall array requires a full pass through the data, MATLAB does not immediately calculate the value. Instead, like most operations with tall arrays, the result is an unevaluated tall array whose values and size are currently unknown.

```
s = size(T)
```

```
s =

  1×2 tall double row vector

    ?    ?
```

Use the `gather` function to perform the deferred calculation and return the result in memory. The result returned by `size` is a trivially small 1-by-2 vector, which fits in memory.

```
sz = gather(s)
```

```
Evaluating tall expression using the Local MATLAB Session:

- Pass 1 of 1: Completed in 1 sec

Evaluation completed in 1 sec

sz =

      123523          29
```

If you use `gather` on an unreduced tall array, then the result might not fit in memory. If you are unsure whether the result returned by `gather` can fit in memory, use `gather(head(X))` or `gather(tail(X))` to bring only a small portion of the calculation result into memory.

Convert In-Memory Array to Tall Array

Create an in-memory array of random numbers, and then convert it into a tall array. Creating tall arrays from in-memory arrays is useful for debugging or prototyping new programs.

```
A = rand(100,4);
tA = tall(A)
```

```
tA =

  100×4 tall double matrix

    0.8147    0.1622    0.6443    0.0596
    0.9058    0.7943    0.3786    0.6820
    0.1270    0.3112    0.8116    0.0424
    0.9134    0.5285    0.5328    0.0714
    0.6324    0.1656    0.3507    0.5216
    0.0975    0.6020    0.9390    0.0967
    0.2785    0.2630    0.8759    0.8181
    0.5469    0.6541    0.5502    0.8175
```

```
⋮          ⋮          ⋮          ⋮
⋮          ⋮          ⋮          ⋮
```

Input Arguments

ds — Input datastore

datastore object

Input datastore, specified as a datastore object. Use the `datastore` function to create a datastore object for your data set.

Example: `ds = datastore('airlinesmall.csv')` specifies a single file.

Example: `ds = datastore('*.csv')` specifies a collection of `.csv` files.

Example: `ds = datastore('C:\MyData')` specifies a folder of files.

Example: `hdfs://myserver:7867/data/` specifies a data set in an HDFS file system.

A — In-memory variable

array

In-memory variable, specified as an array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `table` | `string` | `cell` | `categorical` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

Output Arguments

t — Tall array

array

Tall array.

- When converting a datastore, `t` is a tall table for tabular datastores. Otherwise, `t` is a tall cell array.
- When converting an in-memory array, the underlying data type of `t` is the same as `class(A)`.

Tips

- See “Extend Tall Arrays with Other Products” for information on how to use tall arrays with:
  - Statistics and Machine Learning Toolbox
  - Parallel Computing Toolbox
  - MATLAB Distributed Computing Server
  - Database Toolbox
  - MATLAB Compiler

See Also

See Also

`classUnderlying` | `datastore` | `gather` | `head` | `isaUnderlying` | `istall` | `mapreducer` | `tail` | `topkrows`

Topics

“Tall Arrays”
“Deferred Evaluation of Tall Arrays”
“Visualization of Tall Arrays”
“Functions That Support Tall Arrays (A–Z)”

Introduced in R2016b

tan

Tangent of argument in radians

Syntax

```
Y = tan(X)
```

Description

`Y = tan(X)` returns the tangent of each element of `X`. The `tan` function operates element-wise on arrays. The function accepts both real and complex inputs. For real values of `X` in the interval [-Inf, Inf], `tan` returns real values in the interval [-Inf ,Inf]. For complex values of `X`, `tan` returns complex values. All angles are in radians.

Examples

Plot Tangent Function

Plot the tangent function over the domain $-\pi/2 \le x \le \pi/2$.

```
x = (-pi/2)+0.01:0.01:(pi/2)-0.01;
plot(x,tan(x)), grid on
```

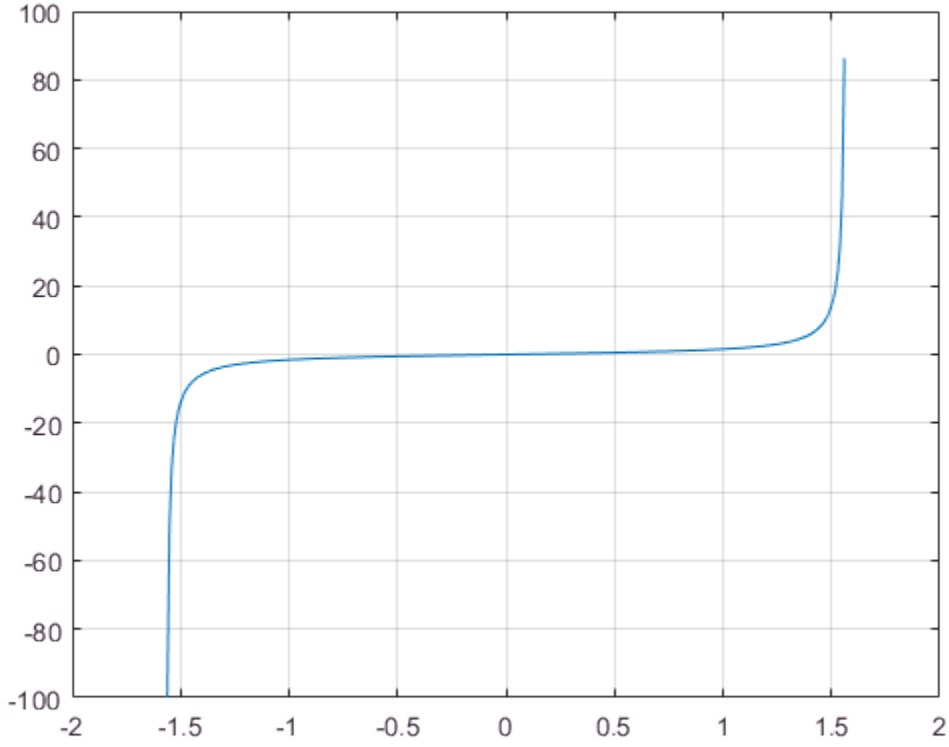

Tangent of Vector of Complex Angles

Calculate the tangent of the complex angles in vector `x`.

```
x = [-i pi+i*pi/2 -1+i*4];
y = tan(x)
```

```
y =
   0.0000 - 0.7616i  -0.0000 + 0.9172i  -0.0006 + 1.0003i
```

Input Arguments

X — Input angle in radians

scalar | vector | matrix | multidimensional array

Input angle in radians, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Tangent of input angle

scalar | vector | matrix | multidimensional array

Tangent of input angle, returned as a real-valued or complex-valued scalar, vector, matrix or multidimensional array.

Definitions

Tangent Function

The tangent of an angle, α, defined with reference to a right angled triangle is

$$\tan(\alpha) = \frac{\text{opposite side}}{\text{adjacent side}} = \frac{a}{b}.$$

.

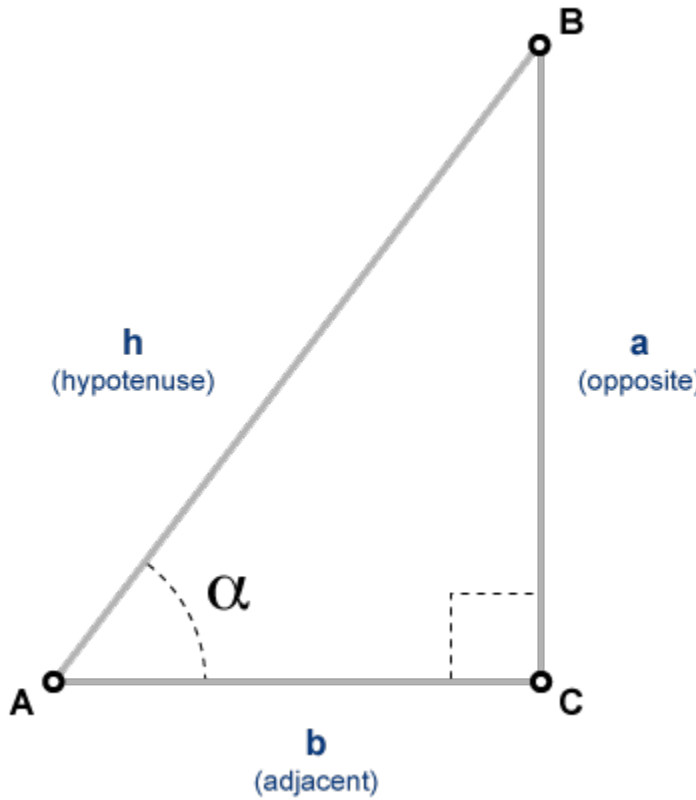

The tangent of a complex angle, α, is

$$\tan(\alpha) = \frac{e^{i\alpha} - e^{-i\alpha}}{i\left(e^{i\alpha} + e^{-i\alpha}\right)}.$$

.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`atan` | `atan2` | `atan2d` | `atand` | `tand` | `tanh`

Introduced before R2006a

tand

Tangent of argument in degrees

Syntax

```
Y = tand(X)
```

Description

`Y = tand(X)` returns the tangent of the elements of `X`, which are expressed in degrees.

Examples

Tangent of 90 degrees compared to tangent of π/2 radians

```
tand(90)
```

```
ans = Inf
```

```
tan(pi/2)
```

```
ans = 1.6331e+16
```

`tand(90)` is infinite, whereas `tan(pi/2)` is large but finite.

Tangent of vector of complex angles, specified in degrees

```
z = [180+i 15+2i 10+3i];
y = tand(z)
```

```
y =
   0.0000 + 0.0175i   0.2676 + 0.0374i   0.1758 + 0.0539i
```

Input Arguments

X — Angle in degrees

scalar value | vector | matrix | N-D array

Angle in degrees, specified as a real-valued or complex-valued scalar, vector, matrix, or N-D array. The `tand` operation is element-wise when `X` is nonscalar.

Data Types: `single` | `double`
Complex Number Support: Yes

Output Arguments

Y — Tangent of angle

scalar value | vector | matrix | N-D array

Tangent of angle, returned as a real-valued or complex-valued scalar, vector, matrix, or N-D array of the same size as `X`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- In some cases, generated code returns `-Inf` when MATLAB returns `Inf`.

- In some cases, generated code returns `Inf` when MATLAB returns `-Inf`.

See Also

See Also

`atan` | `atand` | `tan`

Introduced before R2006a

tanh

Hyperbolic tangent

Syntax

```
Y = tanh(X)
```

Description

The `tanh` function operates element-wise on arrays. The function's domains and ranges include complex values. All angles are in radians.

`Y = tanh(X)` returns the hyperbolic tangent of each element of `X`.

Examples

Graph Hyperbolic Tangent Function

Graph the hyperbolic tangent function over the domain $-5 \le x \le 5$.

```
x = -5:0.01:5;
plot(x,tanh(x)), grid on
```

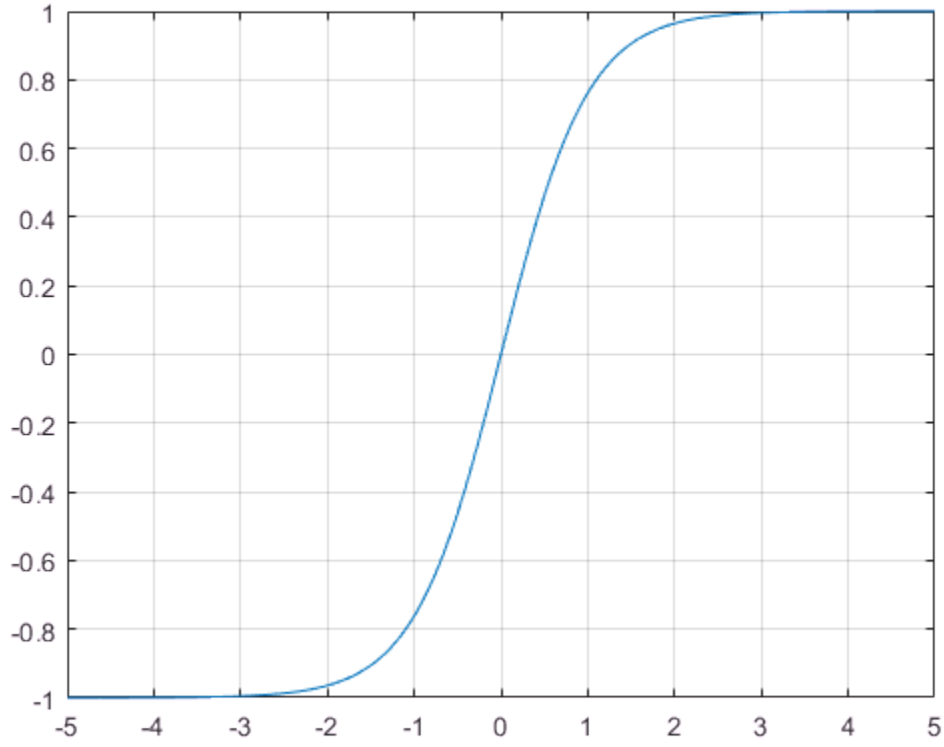

Definitions

Hyperbolic Tangent

The hyperbolic tangent of z is

$$\tanh(z) = \frac{\sinh(z)}{\cosh(z)}.$$

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`atan` | `atan2` | `tan` | `atanh` | `sinh` | `cosh`

Introduced before R2006a

tar

Compress files into tar file

Syntax

```
tar(tarfilename,files)
tar(tarfilename,files,rootfolder)
entrynames = tar(...)
```

Description

`tar(tarfilename,files)` creates a tar file named *`tarfilename`* from the list of files and folders specified in *`files`*. Folders recursively include all of their content. If *`files`* includes relative paths, the tar file also contains relative paths. The tar file does not include absolute paths.

`tar(tarfilename,files,rootfolder)` specifies the path for *`files`* relative to *`rootfolder`* rather than the current folder. Relative paths in the tar file reflect the relative paths in *`files`*, and do not include path information from *`rootfolder`*.

`entrynames` `= tar(...)` returns a cell array of character vectors containing the names of the files in *`tarfilename`*. If *`files`* includes relative paths, *`entrynames`* also contains relative paths.

Input Arguments

`tarfilename`

Name of the tar file, specified as a character vector. If *`tarfilename`* has no extension, MATLAB appends the `.tar` extension. The *`tarfilename`* extension can end in `.tgz` or `.gz`. In this case, *`tarfilename`* is gzipped.

`files`

List of files or folders included in *`tarfilename`*, specified as a character vector or a cell array of character vectors.

Individual files that are on the MATLAB path can be specified as partial path names. Otherwise an individual file can be specified relative to the current folder or with an absolute path.

Folders must be specified relative to the current folder or with absolute paths. On UNIX systems, folders can also start with `~/` or `~username/`, which expands to the current user's home folder or the specified user's home folder, respectively. The wildcard character `*` can be used when specifying files or folders, except when relying on the MATLAB path to resolve a file name or partial path name.

`rootfolder`

Path for *`files`*, specified as a character vector.

Examples

Tar all files in the current folder to the file `backup.tgz`.

```
tar('backup.tgz','.');
```

Tips

`tar` cannot compress folders larger than 2 GB.

See Also

`gzip` | `gunzip` | `untar` | `unzip` | `zip`

Introduced before R2006a

targetupdater

Set up support package that is already installed (Not recommended)

Compatibility

`targetupdater` is not recommended. To manage your support packages and setup your hardware, on the MATLAB **Home** tab, in the **Environment** section, click **Add-Ons > Manage Add-Ons**.

Syntax

```
targetupdater
```

Description

`targetupdater` sets up a support package that is already installed.

Setting up a support package can include:

- Updating firmware on the target hardware.
- Validating the installation folder of third-party software.
- Validating licenses.

The `targetupdater` function starts Support Package Installer at the **Set up support package** screen.

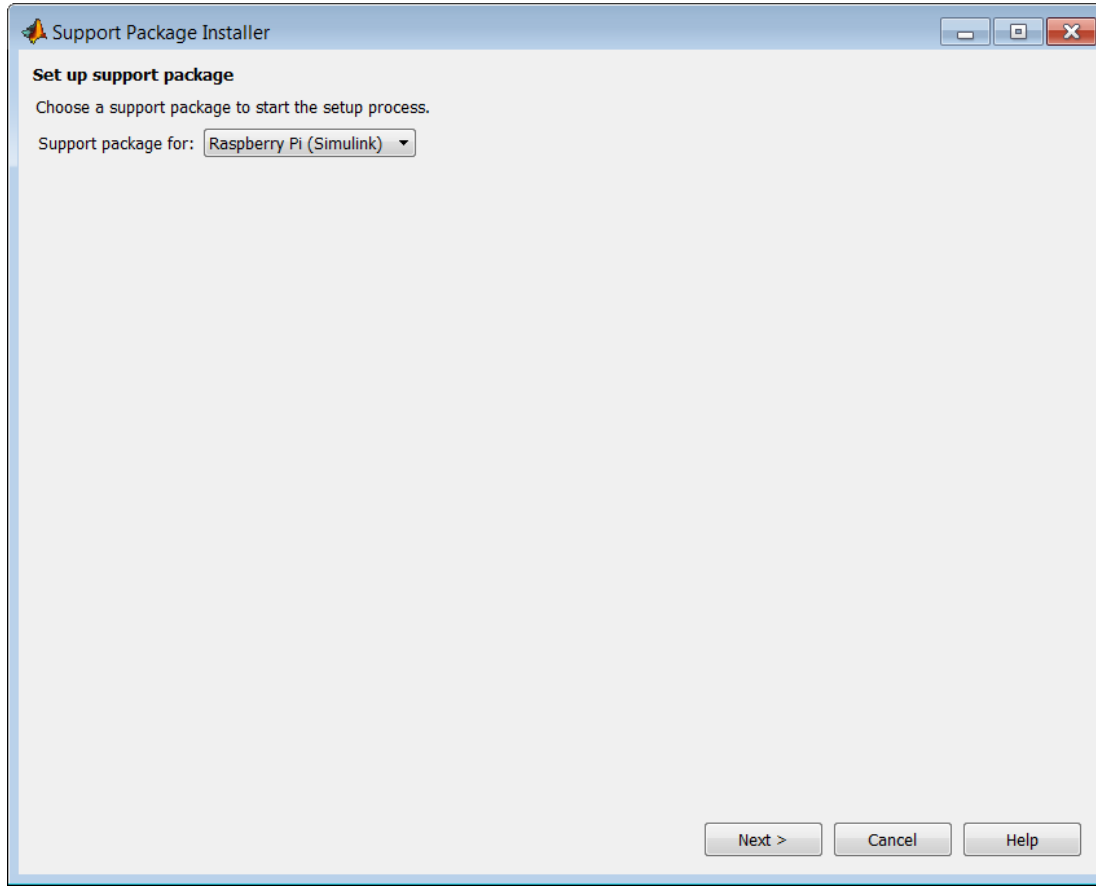

Tip: Some support packages do not require set up. If the **Set up support package** screen does not display an installed support package, the support package does not require set up.

To check whether a support package is installed, use the `matlabshared.supportpkg.getInstalled` function.

See Also

See Also

`matlabshared.supportpkg.checkForUpdate` | `matlabshared.supportpkg.getInstalled` | `supportPackageInstaller`

tcpclient

Create TCP/IP client object to communicate over TCP/IP

Syntax

```
t = tcpclient('Address',Port)
t = tcpclient('Address',Port,'Timeout',<timeout_value>)
t = tcpclient('Address',
Port,'ConnectTimeout',<connect_timeout_value>)
```

Description

`t = tcpclient('Address',Port)` constructs a TCP/IP object, `t`, associated with remote host, `Address`, and remote port value, `Port`. The address can be either a remote host name or a remote IP address. The port must be a positive integer between `1` and `65535`.

If an invalid address or port is specified, or the connection to the server cannot be established, the object will not be created.

`t = tcpclient('Address',Port,'Timeout',<timeout_value>)` additionally sets a timeout value. The `Timeout` property specifies the waiting time to complete read and write operations in seconds, and the default is `10`.

`t = tcpclient('Address',`
`Port,'ConnectTimeout',<connect_timeout_value>)` additionally sets a connection timeout value. The `ConnectTimeout` property specifies the maximum time in seconds to wait for a connection request to the specified remote host to succeed or fail. The default is `Inf`.

Examples

Create Object Using Host Name

Create the TCP/IP object `t` using the host address shown and Port of `80`.

```
t = tcpclient('www.mathworks.com', 80)

t =

   tcpclient with properties:

          Address: 'www.mathworks.com'
             Port: 80
          Timeout: 10
   BytesAvailable: 0
   ConnectTimeout: Inf
```

Note: When connecting using a host name, such as a specified web address or `'localhost'`, the IP address will default to an IPv6 format. If the server you are connecting to is expecting an IPv4 format, it will fail. If this happens, you can connect by specifying an explicit IP address, rather than a host name.

Create Object Using IP Address

Create the TCP/IP object `t` using the IP address shown and Port of `4012`.

```
t = tcpclient('172.28.154.231', 4012)

t =

   tcpclient with properties:

          Address: '172.28.154.231'
             Port: 4012
          Timeout: 10
   BytesAvailable: 0
   ConnectTimeout: Inf
```

Create Object Setting the Timeout Property

Create the TCP/IP object `t` and increase the `Timeout` to `20` seconds.

```
t = tcpclient('172.28.154.231', 4012, 'Timeout', 20)

t =

   tcpclient with properties:
```

```
          Address: '172.28.154.231'
             Port: 4012
          Timeout: 20
   BytesAvailable: 0
   ConnectTimeout: Inf
```

The output reflects the `Timeout` property change.

Create Object Setting the Connect Timeout Property

Create the TCP/IP object `t` and set the `ConnectTimeout` to `30` seconds.

```
t = tcpclient('172.28.154.231', 4012, 'ConnectTimeout', 30)
```

```
t = 

   tcpclient with properties:

          Address: '172.28.154.231'
             Port: 4012
          Timeout: 10
   BytesAvailable: 0
   ConnectTimeout: 30
```

The output reflects the `ConnectTimeout` property change.

- "Create a TCP/IP Connection"
- "Configure Properties for TCP/IP Communication"
- "Write and Read Data over TCP/IP Interface"

Input Arguments

`Address` — Remote host name or IP address for connection

character vector

Remote host name or IP address for connection, specified as a character vector. Specify address as the first argument when you create the `tcpclient` object.

Example: `t = tcpclient('www.mathworks.com', 4012)`

Data Types: `char`

`Port` — Remote host port for connection

numeric scalar

Remote host port for connection, specified as a numeric scalar. Specify port number as the second argument when you create the `tcpclient` object. The `Port` must be a positive integer between `1` and `65535`.

Example: `t = tcpclient('www.mathworks.com', 4012)`

Data Types: `double`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `t = tcpclient('172.28.154.231', 120, 'Timeout', 15, 'ConnectTimeout', 30)`

`'Timeout'` — Timeout for read/write operation

10 (default) | numeric scalar

Timeout for read/write operation specified as the comma-separated pair consisting of `'Timeout'` and a positive value of type `double`. You can change the value either during object creation or after you create the object.

For information on how to change the timeout value after object creation, see Configure Properties for TCP/IP Communication.

Example: `t = tcpclient('172.28.154.231', 4012, 'Timeout', 20)`

Data Types: `double`

`'ConnectTimeout'` — Timeout for connection to remote host

`Inf` (default) | numeric scalar

Timeout for connection to remote host specified as the comma-separated pair consisting of `'ConnectTimeout'` and a positive value of type `double`. The property specifies the maximum time in seconds to wait for a connection request to the specified remote host to succeed or fail. You can only change the value during object creation.

Example: `t = tcpclient('172.28.154.231', 4012, 'ConnectTimeout', 30)`

Data Types: `double`

See Also

Topics

"Create a TCP/IP Connection"
"Configure Properties for TCP/IP Communication"
"Write and Read Data over TCP/IP Interface"

Introduced in R2014b

tempdir

Name of system's temporary folder

Syntax

```
tmp_folder = tempdir
```

Description

`tmp_folder = tempdir` returns the name of the system's temporary folder, if one exists. This function does not create a new folder.

See Also

`delete` | `recycle` | `tempname`

Topics

"Create Temporary Files"

Introduced before R2006a

tempname

Unique name for temporary file

Syntax

```
tmpName = tempname
```

Description

`tmpName = tempname` returns a character vector, `tmpName`, suitable for use as a temporary file path in your system's temporary folder.

Examples

Create Temporary File Name with Extension

Create a temporary file name that has the extension, `.dat`, by concatenating two character vectors.

```
tmpName = [tempname,'.dat'];
```

Write Data to Temporary File

Create a temporary file name.

```
filename = tempname;
```

Create a new file with the temporary file name, and write data to the file.

```
fileID = fopen(filename,'w');
fwrite(fileID,magic(5));
fclose(fileID);
```

Limitations

- In most cases, `tempname` generates a universally unique identifier (UUID). However, if you run MATLAB without JVM software, then `tempname` generates a random character vector using the CPU counter and time, which is not guaranteed to be unique. For more information about the MATLAB startup option that does not load JVM software, see "Commonly Used Startup Options".

See Also

See Also

`tempdir`

Topics

"Create Temporary Files"

Introduced before R2006a

testsuite

Create suite of tests

Syntax

```
suite = testsuite
suite = testsuite(tests)
suite = testsuite(tests,Name,Value)
```

Description

`suite = testsuite` creates a suite of tests from your current folder, and returns the suite as a `Test` array.

To run a test suite created with `testsuite`, use the `run` method of `matlab.unittest.TestSuite`, `matlab.unittest.TestRunner`, or `matlab.perftest.TimeExperiment`.

`suite = testsuite(tests)` creates a suite from a set of specified tests.

`suite = testsuite(tests,Name,Value)` creates a suite of tests with additional options specified by one or more `Name,Value` pair arguments.

Examples

Test Suite from Working Folder

Create a folder `myExample` in your current working folder, make it your current working folder, and create a couple of tests.

In the `myExample` folder, create a script-based test, `onesTest.m`.

```
%% Test double class
expClass = 'double';
act = ones;
assert(isa(act,expClass))
```

```
%% Test single class
expClass = 'single';
act = ones('single');
assert(isa(act,expClass))

%% Test uint16 class
expClass = 'uint16';
act = ones('uint16');
assert(isa(act,expClass))

%% Test size
expSize = [7 13];
act = ones([7 13]);
assert(isequal(size(act),expSize))

%% Test values
act = ones(42);
assert(unique(act) == 1)
```

In the `myExample` folder, create a function-based test, `eyeTest.m`.

```
function tests = eyeTest
tests = functiontests(localfunctions);

function doubleClassTest(testCase)
actValue = eye;
verifyClass(testCase,actValue,'double')

function singleClassTest(testCase)
actValue = eye('single');
verifyClass(testCase,actValue,'single')

function uint16ClassTest(testCase)
actValue = eye('uint16');
verifyClass(testCase,actValue,'uint16')

function sizeTest(testCase)
expSize = [7 13];
actValue = eye(expSize);
verifySize(testCase,actValue,expSize);

function valueTest(testCase)
actValue = eye(42);
verifyEqual(testCase,unique(diag(actValue)),1)    % diagonal are 1s
```

```
verifyEqual(testCase,unique(triu(actValue,1)),0)  % upper tri vals are 0
verifyEqual(testCase,unique(tril(actValue,-1)),0) % lower tri vals are 0
```

Create a test suite from all tests in the current folder.

```
suite = testsuite
```

```
suite = 

  1×10 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

If `onesTest` and `eyesTest` are the only tests in your folder, MATLAB creates a suite of 10 tests.

View the names of the tests in `suite`.

```
{suite.Name}'
```

```
ans = 

    'eyeTest/doubleClassTest'
    'eyeTest/singleClassTest'
    'eyeTest/uint16ClassTest'
    'eyeTest/sizeTest'
    'eyeTest/valueTest'
    'onesTest/TestDoubleClass'
    'onesTest/TestSingleClass'
    'onesTest/TestUint16Class'
    'onesTest/TestSize'
    'onesTest/TestValues'
```

Create a test suite from all tests in `eyeTest`.

```
suite2 = testsuite('eyeTest')
```

```
suite2 = 
```

```
  1×5 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

Test Suite from Select Tests

In your working folder, create a class-based test, `testZeros.m`. This class contains five test methods.

```
classdef testZeros < matlab.unittest.TestCase
    properties (TestParameter)
        type = {'single','double','uint16'};
        outSize = struct('s2d',[3 3], 's3d',[2 5 4]);
    end

    methods (Test)
        function testClass(testCase, type, outSize)
            testCase.verifyClass(zeros(outSize,type), type);
        end

        function testSize(testCase, outSize)
            testCase.verifySize(zeros(outSize), outSize);
        end

        function testDefaultClass(testCase)
            testCase.verifyClass(zeros, 'double');
        end
        function testDefaultSize(testCase)
            testCase.verifySize(zeros, [1 1]);
        end

        function testDefaultValue(testCase)
            testCase.verifyEqual(zeros,0);
        end
    end
```

```
end
```

The full test suite has 11 test elements: 6 from the `testClass` method, 2 from the `testSize` method, and 1 each from the `testDefaultClass`, `testDefaultSize`, and `testDefaultValue` methods.

Create a test suite from the test elements with test names that contain `'Default'`.

```
suite = testsuite('testZeros','Name','*Default*')
```

```
suite = 

  1×3 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

Create a test suite from the test elements that use the `outSize` parameter property.

```
suite = testsuite('testZeros','ParameterProperty','outSize')
```

```
suite = 

  1×8 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   5 Unique Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

The test suite contains eight tests that use the `outSize` parameter property: six from the `testClass` method and two from the `testSize` method.

Input Arguments

`tests` — Array of tests

character vector | cell array of character vectors

Suite of tests specified as a character vector or cell array of character vectors. Each character vector in the cell array can contain the name of a test file, a test class, a test suite element name, a package containing your test classes, or a folder containing your test files.

Example: `testsuite('ATestFile.m')`

Example: `testsuite('ATestFile/aTest')`

Example: `testsuite('mypackage.MyTestClass')`

Example: `testsuite(pwd)`

Example:
`testsuite({'mypackage.MyTestClass','ATestFile.m',pwd,'mypackage.subpackage'})`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `suite = testsuite(tests,'Name','productA_*')` creates a test suite from `tests` that have names starting with `'productA_'`.

`'BaseFolder'` — Name of base folder

character vector

Name of the folder that contains the file defining the test class, function, or script, specified as a character vector. This argument filters `TestSuite` array elements. To include a test element in the suite, the specified base folder must contain that

test element. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match a single character. For test files defined in packages, the base folder is the parent of the top-level package folder.

`'IncludeSubfolders'` — Indicator to include tests in subfolders
`false` (default) | `true` | `0` | `1`

Indicator to include tests in subfolders in the suite, specified as `false` or `true` (`0` or `1`). By default the framework creates a suite from tests in the specified folders and not in their subfolders.

Data Types: `logical`

`'IncludeSubpackages'` — Indicator to include tests in subpackages
`false` (default) | `true` | `0` | `1`

Indicator to include tests in subpackages in the suite, specified as `false` or `true` (`0` or `1`). By default the framework creates a suite from tests in the specified package and not in their subpackages.

Data Types: `logical`

`'Name'` — Name of suite element
character vector

Name of the suite element, specified as a character vector. This argument filters `TestSuite` array elements. For the testing framework to include a test in the suite, the `Name` property of the test element must match the specified name. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match a single character.

`'ParameterName'` — Name of parameter
character vector

Name of a parameter used by the test suite element, specified as a character vector. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match a single character.

`'ParameterProperty'` — Name of parameterization property
character vector

Name of a property that defines a parameter used by the test suite element, specified as a character vector. This argument filters `TestSuite` array elements. Use the wildcard

character, `*`, to match any number of characters. Use the question mark character, `?`, to match a single character.

`'ProcedureName'` — Name of the test procedure in the test
character vector

Name of test procedure, specified as a character vector. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

In a class-based test, the `ProcedureName` is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title. Unlike `Name`, the name of the test procedure does not include any class or package name or information about parameterization.

`'Tag'` — Name of test element tag
character vector

Name of test element tag, specified as a character vector. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

Tips

- If you do not need to create a test suite explicitly, use `runtests` or `runperf` to create the suite implicitly before running the tests.
- An alternative way to create an explicit test suite is to use the matlab.unittest.TestSuite methods.

See Also

See Also

matlab.unittest.TestSuite | matlab.unittest.TestSuite.run | matlab.unittest.TestRunner.run | matlab.perftest.TimeExperiment.run

Introduced in R2016a

tetramesh

Tetrahedron mesh plot

Syntax

```
tetramesh(T,X,c)
tetramesh(T,X)
tetramesh(TR)
h = tetramesh(...)
tetramesh(...,'param','value','param','value'...)
```

Description

`tetramesh(T,X,c)` displays the tetrahedrons defined in the `m`-by-4 matrix `T` as mesh. `T` is usually the output of a Delaunay triangulation of a 3-D set of points. A row of `T` contains indices into `X` of the vertices of a tetrahedron. `X` is an `n`-by-3 matrix, representing `n` points in 3 dimension. The tetrahedron colors are defined by the vector `C`, which is used as indices into the current colormap.

`tetramesh(T,X)` uses `C = 1:m` as the color for the `m` tetrahedra. Each tetrahedron has a different color (modulo the number of colors available in the current colormap).

`tetramesh(TR)` displays the tetrahedra in a triangulation representation.

`h = tetramesh(...)` returns a vector of tetrahedron handles. Each element of `h` is a handle to the set of patches forming one tetrahedron. You can use these handles to view a particular tetrahedron by turning the patch `'Visible'` property `'on'` or `'off'`.

`tetramesh(...,'param','value','param','value'...)` allows additional patch property name/property value pairs to be used when displaying the tetrahedrons. For example, the default transparency parameter is set to `0.9`. You can overwrite this value by using the property name/property value pair `('FaceAlpha',value)` where `value` is a number between `0` and `1`. See Patch Properties for information about the available properties.

Examples

Plot Tetrahedrons of 3-D Delaunay Triangulation

Generate a 3-D Delaunay triangulation, then use `tetramesh` to visualize the tetrahedrons.

```
d = [-1 1];
[x,y,z] = meshgrid(d,d,d); % a cube
x = [x(:);0];
y = [y(:);0];
z = [z(:);0];
```

`[x,y,z]` are corners of a cube plus the center.

```
DT = delaunayTriangulation(x,y,z);
tetramesh(DT);
camorbit(20,0)
```

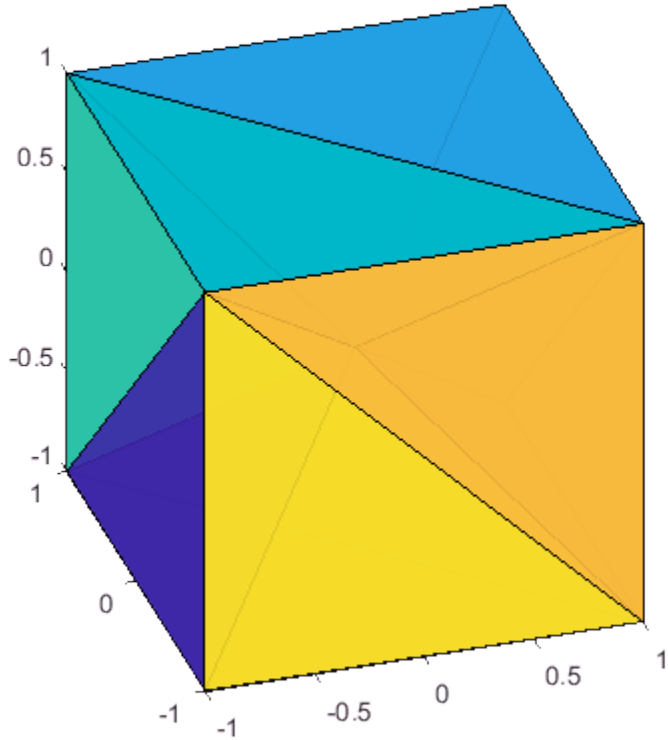

See Also

`trimesh` | `patch` | triangulation | delaunayTriangulation | freeBoundary(triangulation) | `trisurf` | `delaunayn`

Introduced before R2006a

matlab.unittest.Test class

Package: matlab.unittest
Superclasses: matlab.unittest.TestSuite

Specification of a single test method

Description

The `matlab.unittest.Test` class holds the information needed for the `TestRunner` object to be able to run a single `Test` method of a `TestCase` class. A scalar `Test` instance is the fundamental element contained in `TestSuite` arrays. A simple array of `Test` instances is a commonly used form of a `TestSuite` array.

Properties

`Name`

Name of the `Test` element.

`BaseFolder`

Name of the folder that contains the file defining the test content. For tests defined in packages, the base folder is the parent of the top-level package folder.

`Parameterization`

Row vector of parameters required for the `Test`. The `Parameterization` property contains all the parameterized data needed by the `TestRunner`.

`SharedTestFixtures`

Row vector of fixtures required for the `Test`. The `SharedTestFixtures` property contains all the fixtures specified by the `SharedTestFixtures` class-level attribute of the `TestCase` class.

`Tags`

Cell array of tags applied to the test element.

ProcedureName

Name of the test procedure that runs for the `Test`. In a class-based test, the `ProcedureName` is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title. Unlike the `Name` property, `ProcedureName` does not include any class or package name or information about parameterization.

Examples

Show Class of a TestSuite Array

Create a suite of `Test` objects of all test methods in the `BankAccountTest` class.

```
import matlab.unittest.TestSuite;

suite = TestSuite.fromClass(?BankAccountTest);

whos suite
```

```
  Name       Size            Bytes  Class                    Attributes

  suite      1x5              1636  matlab.unittest.Test
```

Each test is a `matlab.unittest.Test` object.

Display test method names.

```
{suite.Name}'
```

```
ans =

    'BankAccountTest/testConstructor'
    'BankAccountTest/testConstructorNotEnoughInputs'
    'BankAccountTest/testDesposit'
    'BankAccountTest/testWithdraw'
```

```
'BankAccountTest/testNotifyInsufficientFunds'
```

See Also

See Also

matlab.unittest.TestSuite | matlab.unittest.TestRunner | matlab.unittest.TestCase | `matlab.unittest.fixtures`

matlab.unittest.TestCase class

Package: matlab.unittest

Superclass of all `matlab.unittest` test classes

Description

The `TestCase` class is the means by which a test is written in the `matlab.unittest` framework. It provides the means to write and identify test content, as well as test fixture setup and teardown routines. Creating such a test requires deriving from `TestCase` to produce a `TestCase` subclass. Then, subclasses can leverage the metadata attributes to specify tests and test fixtures.

Construction

Use the `forInteractiveUse` static method to create a `TestCase` for interactive, command line use. When tests are run in the framework, `TestCase` instances are constructed by the `matlab.unittest.TestRunner`.

Methods

addTeardown	Dynamically add teardown routine
applyFixture	Use fixture with `TestCase`
forInteractiveUse	Create TestCase for interactive use
getSharedTestFixtures	Provide access to shared test fixtures
log	Record diagnostic information
run	Run `TestCase` test

Inherited Methods

The `TestCase` class inherits methods from the following classes:

matlab.unittest.qualifications.Assertable	Qualification to validate preconditions of a test
matlab.unittest.qualifications.Assumable	Qualification to filter test content
matlab.unittest.qualifications.FatalAssertable	Qualification to abort test execution
matlab.unittest.qualifications.Verifiable	Qualification to produce soft failure conditions

Attributes

Class Attributes

`TestCase` objects support the following class level attributes. Specify class-level attributes in the `classdef` block before the class name.

`SharedTestFixtures`	Class block to contain shared test fixtures. You must define `SharedTestFixtures` as a cell array of `matlab.unittest.fixtures.Fixture` instances.
`TestTags`	Class block to contain tests tagged with a specified value. You must define `TestTags` as a cell array of non-empty character vectors, where each character vector is a tag for the test.

Method Attributes

Classes that derive from `TestCase` can define `methods` blocks which contain `matlab.unittest` framework-specific attributes to specify test content.

`Test`	Method block to contain test methods.
`TestMethodSetup`	Method block to contain setup code.
`TestMethodTeardown`	Method block to contain teardown code.
`TestClassSetup`	Method block to contain class level setup code.

`TestClassTeardown`	Method block to contain class level teardown code.
`ParameterCombination`	Method block to contain parameterized testing code. This attribute accepts the following values: • `'exhaustive'` (default): Test methods are invoked for all combinations of parameters. • `'sequential'`: Test methods are invoked with corresponding values from each parameter. Each parameter must contain the same number of values. • `'pairwise'`: Test methods are invoked for every pair of parameter values at least once.
`TestTags`	Method block to contain tests tagged with a specified value. You must define `TestTags` as a cell array of non-empty character vectors, where each character vector is a tag for the test.

Property Attributes

Classes that derive from `TestCase` can define `properties` blocks which contain `matlab.unittest` framework-specific attributes to specify test content.

`ClassSetupParameter`	Property block to define parameterized testing properties for methods in the `TestClassSetup` block
`MethodSetupParameter`	Property block to define parameterized testing properties for methods in the `MethodSetup` block
`TestParameter`	Property block to define parameterized testing properties for methods in the `Test` block

Events

`VerificationFailed`	Triggered upon failing verification. A `QualificationEventData` object is passed to listener callback functions.
`VerificationPassed`	Triggered upon passing verification. A `QualificationEventData` object is passed to listener callback functions.
`AssertionFailed`	Triggered upon failing assertion. A `QualificationEventData` object is passed to listener callback functions.

`AssertionPassed`	Triggered upon passing assertion. A `QualificationEventData` object is passed to listener callback functions.
`FatalAssertionFailed`	Triggered upon failing fatal assertion. A `QualificationEventData` object is passed to listener callback functions.
`FatalAssertionPassed`	Triggered upon passing fatal assertion. A `QualificationEventData` object is passed to listener callback functions.
`AssumptionFailed`	Triggered upon failing assumption. A `QualificationEventData` object is passed to listener callback functions.
`AssumptionPassed`	Triggered upon passing assumption. A `QualificationEventData` object is passed to listener callback functions.
`ExceptionThrown`	Triggered by the `TestRunner` when an exception is thrown. An `ExceptionEventData` object is passed to listener callback functions.
`DiagnosticLogged`	Triggered by the `TestRunner` upon a call to the `log` method. A `LoggedDiagnosticEventData` object is passed to the listener callback functions.

Examples

Create Test Case Class

Create a test case class, `FigurePropertiesTest`, with `TestMethodSetup` and `TestMethodTeardown` methods.

```
classdef FigurePropertiesTest < matlab.unittest.TestCase

    properties
        TestFigure
    end

    methods(TestMethodSetup)
        function createFigure(testCase)
            testCase.TestFigure = figure;
        end
    end

    methods(TestMethodTeardown)
        function closeFigure(testCase)
```

```
            close(testCase.TestFigure)
        end
    end

    methods(Test)

        function defaultCurrentPoint(testCase)

            cp = testCase.TestFigure.CurrentPoint;
            testCase.verifyEqual(cp, [0 0], ...
                'Default current point is incorrect')
        end

        function defaultCurrentObject(testCase)
            import matlab.unittest.constraints.IsEmpty

            co = testCase.TestFigure.CurrentObject;
            testCase.verifyThat(co, IsEmpty, ...
                'Default current object should be empty')
        end

    end

end
```

- "Create Basic Parameterized Test"
- "Create Advanced Parameterized Test"
- "Tag Unit Tests"

See Also

See Also

matlab.unittest.qualifications.QualificationEventData | matlab.unittest.qualifications.ExceptionEventData | matlab.unittest.diagnostics.LoggedDiagnosticEventData | `addlistener` | `matlab.unittest.constraints` | `matlab.unittest.qualifications` | TestRunner

Topics

"Create Basic Parameterized Test"

"Create Advanced Parameterized Test"
"Tag Unit Tests"
"Method Attributes"
"Class Attributes"

Introduced in R2013a

addTeardown

Class: matlab.unittest.TestCase
Package: matlab.unittest

Dynamically add teardown routine

Syntax

```
addTeardown(testCase,tearDownFcn)
addTeardown(testCase,tearDownFcn,arg1,...,argN)
```

Description

`addTeardown(testCase,tearDownFcn)` adds the `tearDownFcn` function handle that defines fixture teardown code to the `testCase` instance. The teardown code is executed in the reverse order to which it is added. This is known as LIFO (or Last-In-First-Out).

`addTeardown(testCase,tearDownFcn,arg1,...,argN)` provides input arguments to the `tearDownFcn`.

Input Arguments

`testCase`

`matlab.unittest.TestCase` instance

Default:

`tearDownFcn`

Function, specified as a function handle, that defines the fixture teardown code

Default:

`arg1,...,argN`

Input arguments, 1 through N (if any), required by `tearDownFcn`, specified by any type. The argument type is specified by the function argument list.

Default:

Examples

Call addTeardown in a TestMethodSetup Method

```
classdef SomeTest < matlab.unittest.TestCase

    methods(TestMethodSetup)
        function createFixture(testCase)
            p = path;
            testCase.addTeardown(@path, p);
            addpath(fullfile(pwd,'testHelpers'));
        end
    end
end
```

See Also

applyFixture

Class: matlab.unittest.TestCase
Package: matlab.unittest

Use fixture with `TestCase`

Syntax

```
applyFixture(testCase,fixture)
```

Description

`applyFixture(testCase,fixture)` prepares the specified fixture for use with the `TestCase`. This method enables the use of a fixture within the scope of a single `Test` method or `TestCase` class. The life cycle of the fixture is tied to the `TestCase`. When the `TestCase` goes out of scope, the test framework tears down the fixture.

Call `applyFixture` within a `Test` method or `TestMethodSetup` method to use a fixture for the current test method alone. Use `applyFixture` within a `TestClassSetup` method to set up a fixture for the entire class.

Input Arguments

`testCase`

`matlab.unittest.TestCase` instance

`fixture`

`matlab.unittest.fixtures.Fixture` instance

Examples

Apply Fixtures to `TestCase` Class

Create a temporary folder and make it the current working folder.

```
classdef applyFixtureTest < matlab.unittest.TestCase
    methods(TestMethodSetup)
        function addHelpers(testCase)
            import matlab.unittest.fixtures.TemporaryFolderFixture;
            import matlab.unittest.fixtures.CurrentFolderFixture;

            % Create a temporary folder and make it the current working
            % folder.
            tempFolder = testCase.applyFixture(TemporaryFolderFixture);
            testCase.applyFixture(CurrentFolderFixture(tempFolder.Folder));
        end
    end
end
```

Each test method can write files to the current working folder, which is the temporary folder. After each test method runs, the test framework restores the working folder to its previous state and deletes the temporary folder.

See Also

See Also

`matlab.unittest.fixtures`

matlab.unittest.TestCase.forInteractiveUse

Class: matlab.unittest.TestCase
Package: matlab.unittest

Create TestCase for interactive use

Syntax

```
tc = matlab.unittest.TestCase.forInteractiveUse
tc = matlab.unittest.TestCase.forInteractiveUse(testclass)
```

Description

`tc = matlab.unittest.TestCase.forInteractiveUse` creates a `TestCase` instance for interactive use. The `TestCase` is configured for experimentation at the command prompt. It reacts to qualification tests by printing messages to the screen for both passing and failing conditions.

`tc = matlab.unittest.TestCase.forInteractiveUse(testclass)` creates an instance of the `testclass` class for interactive use.

Input Arguments

`testclass`

`meta.class` instance that describes a `matlab.unittest.TestCase` subclass

Examples

Verify Values Using Interactive TestCase

Create a `TestCase` for interactive use.

```
import matlab.unittest.TestCase;
```

```
testCase = TestCase.forInteractiveUse;
```

Produce a passing verification.

```
testCase.verifyTrue(true, 'true should be true');
```

```
Interactive verification passed.
```

Produce a failing verification.

```
testCase.verifyTrue(false);
```

```
Interactive verification failed.

---------------------
Framework Diagnostic:
---------------------
verifyTrue failed.
--> The value must evaluate to "true".

Actual Value:
         0
```

Create Interactive TestCase for Specified Class

In a file in your working folder, create `ExampleTest.m`. This class is a subclass of `TestCase` and provides a helper verification method, `verifySameSize`.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods
        function verifySameSize(testCase, actual, expected)
            import matlab.unittest.constraints.ReturnsTrue;

            diagnostic = ['Actual and expected value sizes do not match.'...
                '\nActual size: ' num2str(size(actual)) ...
                '\nExpected size: ' num2str(size(expected))];

            testCase.verifyThat(@()isequal(size(actual),size(expected)),...
                ReturnsTrue, sprintf(diagnostic));
        end
    end
end
```

At the command prompt, create an interactive test case from the `ExampleTest` class.

```
tc = matlab.unittest.TestCase.forInteractiveUse(?ExampleTest);
```

Use the test case at the command prompt to call the `verifySameSize` method interactively.

```
tc.verifySameSize(1:10,5)
```

```
Interactive verification failed.

----------------
Test Diagnostic:
----------------
Actual and expected value sizes do not match.
Actual size: 1  10
Expected size: 1  1

---------------------
Framework Diagnostic:
---------------------
ReturnsTrue failed.
--> The function handle should have evaluated to "true".
--> Returned value:
             0

Actual function_handle:
        @()isequal(size(actual),size(expected))
```

See Also

See Also

matlab.unittest.TestCase | `matlab.unittest.qualifications`

Introduced in R2014a

getSharedTestFixtures

Class: matlab.unittest.TestCase
Package: matlab.unittest

Provide access to shared test fixtures

Syntax

```
fixtures = getSharedTestFixtures(testCase)
fixtures = getSharedTestFixtures(testCase,fixtureClassName)
```

Description

`fixtures = getSharedTestFixtures(testCase)` provides access to the array of all shared test fixtures for `testCase`. `getSharedTestFixtures` returns an array of fixture objects, `fixtures`. Specify shared fixtures are using the `SharedTestFixtures` attribute for the `testCase` class.

`fixtures = getSharedTestFixtures(testCase,fixtureClassName)` returns only the shared fixtures that have the class name `fixtureClassName`.

Input Arguments

`testCase`

`matlab.unittest.TestCase` instance

Default:

`fixtureClassName`

Name of test fixture class, specified as a character vector or string scalar

Examples

Obtain Array of All Shared Fixtures

Create the following class, `myTest`, on your MATLAB path. Two shared fixtures are used within the test method. This example assumes that the subfolder `helperFiles` exists in your working folder. Create the subfolder `helperFiles` in your working folder if it does not exist.

```
classdef (SharedTestFixtures={...
matlab.unittest.fixtures.PathFixture('helperFiles'),...
        matlab.unittest.fixtures.TemporaryFolderFixture}) ...
        myTest < matlab.unittest.TestCase
    methods(Test)
        function accessFixtures(testCase)
            myFixtures = testCase.getSharedTestFixtures
        end
    end
end
```

At the command prompt, run the test.

```
run(myTest);
```

```
Setting up PathFixture.
Description: Adds 'H:\Documents\doc_examples\helperFiles' to the path.
__________

Setting up TemporaryFolderFixture.
Description: Creates a temporary folder.
__________

Running myTest

myFixtures =

  1x2 heterogeneous Fixture (PathFixture, TemporaryFolderFixture) array with no propert

.
Done myTest
__________

Tearing down TemporaryFolderFixture.
```

```
Description: Deletes the temporary folder and all its contents.
__________

Tearing down PathFixture.
Description: Restores the path to its previous state.
__________
```

Access Shared Fixtures of Particular Class

Create the class, `mySecondTest`, on your MATLAB path.

```
classdef (SharedTestFixtures={...
        matlab.unittest.fixtures.TemporaryFolderFixture})...
        mySecondTest < matlab.unittest.TestCase
    methods(Test)
        function accessTemporaryFolderFixture(testCase)
            tempFolderFixture = testCase.getSharedTestFixtures...
                ('matlab.unittest.fixtures.TemporaryFolderFixture');
            temporaryFolder = tempFolderFixture.Folder
        end
    end
end
```

At the command prompt, run the test. The name of the temporary folder varies.

```
run(mySecondTest);
```

```
Setting up TemporaryFolderFixture.
Description: Creates a temporary folder.
__________

Running mySecondTest

temporaryFolder =

C:\Temp\tpb92c9c67_02fa_4714_bfb0_b2127df0f31d

.
Done mySecondTest
__________

Tearing down TemporaryFolderFixture.
Description: Deletes the temporary folder and all its contents.
```

See Also

See Also

matlab.unittest.TestCase | `matlab.unittest.fixtures`

Topics

Class Attributes

log

Class: matlab.unittest.TestCase
Package: matlab.unittest

Record diagnostic information

Syntax

```
log(testCase,diagnostic)
log(testCase,v,diagnostic)
```

Description

`log(testCase,diagnostic)` logs the supplied diagnostic. The log method provides a means for tests to log information during their execution. The testing framework displays logged messages only if you configure it to do so by adding an appropriate plugin, such as the `matlab.unittest.plugins.LoggingPlugin`.

`log(testCase,v,diagnostic)` logs the diagnostic at the specified verbosity level, `v`.

Input Arguments

`testCase` — Instance of test case
`matlab.unittest.TestCase` instance

Instance of test case, specified as a `matlab.unittest.TestCase`.

`diagnostic` — Diagnostic information to display upon a failure
character array | string array | function handle | `matlab.unittest.diagnostics.Diagnostic` instance

Diagnostic information to display upon a failure, specified as a string array, character array, function handle, or `matlab.unittest.diagnostics.Diagnostic` instance.

`v` — Verbosity level
2 (default) | 1 | 3 | 4 | `matlab.unittest.Verbosity` enumeration

Verbosity level, specified as an integer value between 1 and 4 or a `matlab.unittest.Verbosity` enumeration object. The default verbosity level for diagnostic messages is `Concise`. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration.

Numeric Representation	Corresponding Enumeration Member	Verbosity Description
1	`matlab.unittest.Verbosity.Terse`	minimal amount of information
2	`matlab.unittest.Verbosity.Concis`	typical amount of information
3	`matlab.unittest.Verbosity.Detail`	supplemental amount of information
4	`matlab.unittest.Verbosity.Verbos`	surplus of information

Examples

Log Diagnostic Information

Create a function-based test in a file, `sampleLogTest.m`, in your working folder.

```
function tests = sampleLogTest
tests = functiontests(localfunctions);

function svdTest(testCase)
import matlab.unittest.Verbosity

log(testCase,'Generating matrix.');
m = rand(1000);

log(testCase,1,'About to call SVD.');
[U,S,V] = svd(m);

log(testCase,Verbosity.Terse,'SVD finished.');

verifyEqual(testCase,U*S*V',m,'AbsTol',1e-6)
```

At the command prompt, run the test.

```
results = run(sampleLogTest);
```

```
Running sampleLogTest
   [Terse] Diagnostic logged (2014-04-14T14:20:59): About to call SVD.
   [Terse] Diagnostic logged (2014-04-14T14:20:59): SVD finished.
.
Done sampleLogTest
__________
```

The default runner reports the diagnostics at level 1 (`Terse`).

Create a test runner to report the diagnostics at levels 1 and 2, and rerun the test.

```
import matlab.unittest.TestRunner
import matlab.unittest.plugins.LoggingPlugin

runner = TestRunner.withNoPlugins;
p = LoggingPlugin.withVerbosity(2);
runner.addPlugin(p);

results = runner.run(sampleLogTest);
```

```
 [Concise] Diagnostic logged (2014-04-14T14:28:14): Generating matrix.
   [Terse] Diagnostic logged (2014-04-14T14:28:14): About to call SVD.
   [Terse] Diagnostic logged (2014-04-14T14:28:15): SVD finished.
```

See Also

See Also

matlab.unittest.plugins.LoggingPlugin | matlab.unittest.Verbosity

Introduced in R2014b

run

Class: matlab.unittest.TestCase
Package: matlab.unittest

Run `TestCase` test

Syntax

```
result = run(testCase)
result = run(testCase,testMethod)
```

Description

`result = run(testCase)` uses `testCase` as a prototype to run a `TestSuite` array created from all test methods in the class defining `testCase`. This suite is run using a `TestRunner` object configured for text output.

`result = run(testCase,testMethod)` uses `testCase` as a prototype to run a `TestSuite` array created from `testMethod`. This test is run using a `TestRunner` object configured for text output.

This is a convenience method to allow interactive experimentation of `TestCase` classes in MATLAB, yet running the tests contained in them using a supported `TestRunner` object.

Input Arguments

`testCase`

`matlab.unittest.TestCase` instance

Default:

`testMethod`

Name of desired test method, specified as one of the following:

- character vector
- string scalar
- `meta.method` instance

The method must correspond to a valid `Test` method of the `testCase` instance.

Default:

Output Arguments

`result`

A `matlab.unittest.TestResult` object containing the result of the test run.

Examples

Run Test Directly from Test Case

Add the `FigurePropertiesTest.m` test case file to a folder on your MATLAB path.

```
classdef FigurePropertiesTest < matlab.unittest.TestCase

    properties
        TestFigure
    end

    methods(TestMethodSetup)
        function createFigure(testCase)
            % comment
            testCase.TestFigure = figure;
        end
    end

    methods(TestMethodTeardown)
        function closeFigure(testCase)
            close(testCase.TestFigure)
        end
    end

    methods(Test)
```

```
        function defaultCurrentPoint(testCase)

            cp = testCase.TestFigure.CurrentPoint;
            testCase.verifyEqual(cp, [0 0], ...
                'Default current point is incorrect')
        end

        function defaultCurrentObject(testCase)
            import matlab.unittest.constraints.IsEmpty

            co = testCase.TestFigure.CurrentObject;
            testCase.verifyThat(co, IsEmpty, ...
                'Default current object should be empty')
        end

    end

end
```

Create a testcase object.

```
tc = FigurePropertiesTest;
```

Run the tests.

```
tc.run;
```

```
Running FigurePropertiesTest
..
Done FigurePropertiesTest
__________
```

All tests passed.

See Also

See Also

matlab.unittest.TestSuite.run | matlab.unittest.TestRunner.run

matlab.unittest.TestResult class

Package: matlab.unittest

Result of running test suite

Description

The `matlab.unittest.TestResult` class holds the information describing the result of running a test suite using the `matlab.unittest` framework. The results include information describing whether the test passed, failed, or ran to completion, as well as the duration of each test.

Construction

`TestResult` arrays are created and returned by the test runner, and are of the same size as the suite which was run.

Properties

`Name`

The name of the `TestSuite` object for the result.

The `Name` property is a character vector that holds the name of the test corresponding to this result.

`Passed`

Logical value showing if the test passed.

When the `Passed` property is TRUE, then the test completed as expected without any failure. When it is FALSE, then the test did not run to completion and/or encountered a failure condition.

`Failed`

Logical value showing if test failed.

A TRUE `Failed` property indicates some form of test failure. When `Failed` is FALSE, then no failing conditions were encountered. A failing result can occur with a failure condition either in a test or in setting up and tearing down test fixtures. Failures can occur due to the following:

- Verification failures
- Assertion failures
- Uncaught MExceptions

Fatal assertions are also failing conditions, but in the event of a fatal assertion failure, the entire framework aborts and a `TestResult` object is never produced.

`Incomplete`

Logical value showing if test did not run to completion.

A TRUE `Incomplete` property indicates a test did not run to completion. When it is FALSE, then no conditions were encountered that prevented the test from completing. In other words, when FALSE there were no stack disruptions out of the running test content. An incomplete result can occur with a stack disruption in either a test or when setting up and tearing down test fixtures. Incomplete tests can occur due to the following:

- Assertion failures
- Tests filtered through assumption
- Uncaught MExceptions

Fatal assertions are also conditions that prevent the completion of tests, but in the event of a fatal assertion failure the entire framework aborts and a `TestResult` object is never produced.

`Duration`

Time elapsed running test.

The `Duration` property indicates the amount of time taken to run a particular test, including the time taken setting up and tearing down any test fixtures.

Fixture setup time is accounted for in the duration of the first test suite array element that uses the fixture. Fixture teardown time is accounted for in the duration of the last test suite array element that uses the fixture.

The total run time for a suite of tests exceeds the sum of the durations for all the elements of the suite because the `Duration` property does not include all the overhead of the `TestRunner` object, nor any of the time consumed by test runner plugins.

`Details`

Data for test result.

The `Details` property contains additional information relevant to the test execution. The type of information depends on the configuration of the `TestRunner` and its plugins. For example, the `DiagnosticsRecordingPlugin` uses this property to include diagnostic information it encounters during the test.

Tips

- Create a table from the `TestResult` object for access to `table` functionality such as sorting rows, displaying a summary, and writing the table to a file. For example,

  ```
  rt = table(results);
  ```

See Also

See Also

`table` | TestRunner | TestSuite

Topics

"Analyze Test Case Results"
"Analyze Failed Test Results"
Property Attributes

matlab.unittest.TestRunner class

Package: matlab.unittest

Class for running tests in `matlab.unittest` framework

Description

The `matlab.unittest.TestRunner` class is the fundamental API used to run a suite of tests in the `matlab.unittest` framework. It runs and operates on `TestSuite` arrays. Use this class to customize running tests.

The `TestRunner` class is a sealed class; you cannot derive classes from the `TestRunner` class.

Construction

To create a simple, silent `TestRunner` object, call the static `withNoPlugins` method.

```
runner = matlab.unittest.TestRunner.withNoPlugins
```

To create a `TestRunner` object to run tests from the MATLAB Command Window, call the static `withTextOutput` method.

```
runner = matlab.unittest.TestRunner.withTextOutput
```

To create a customized `TestRunner` object, call the `addPlugin` method.

```
runner = TestRunner.withNoPlugins;
runner.addPlugin(SomePlugin())
```

Properties

`ArtifactsRootFolder` — Root folder where test run artifacts are stored

string scalar | character vector

Root folder where test run artifacts are stored, specified as a string scalar or character vector. By default, the value of `ArtifactsRootFolder` is the value from `string(tempdir)`, but you can set it to any writable folder.

Any artifacts produced during a test run are stored in a subfolder within `ArtifactsRootFolder`. The subfolder name is a unique identifier associated with the specific test run. MATLAB creates a subfolder only if the test run produces artifacts.

For example, assume the `ArtifactsRootFolder` is set to `"C:\Temp"` and the automatically-generated test run identifier is `"1231df38-7515-4dbe-a869-c3d9f885f379"`. If a test run produces an artifact, `"artifact.txt"`, the artifact is stored as `"C:\Temp\1231df38-7515-4dbe-a869-c3d9f885f379\artifact.txt"`.

`PrebuiltFixtures` — Fixtures set up outside the test runner
scalar `Fixture` instance | row vector of `Fixture` instances

Fixtures that are set up outside the test runner, specified as a scalar or row vector of `matlab.unittest.fixtures.Fixture` instances. Use this property to specify that the environmental configuration is performed manually instead of automatically during fixture setup and teardown.

The test runner considers these fixtures as already set up and never attempts to set up or tear down any fixtures specified by the `PrebuiltFixtures` property. If a test suite requires a shared test fixture and that test fixture is specified as a prebuilt fixture, the test runner does not perform set up or tear down actions.

Note: The test runner uses a prebuilt fixture only if it is specified by the `PrebuiltFixtures` property and is listed as a `SharedTestFixture` in the test class definition. The test runner does not use a prebuilt fixture if the fixture is registered using the `TestCase.applyFixture` method.

Methods

addPlugin	Add plugin to `TestRunner` object
run	Run all tests in `TestSuite` array
runInParallel	Run all tests in `TestSuite` array in parallel
withNoPlugins	Create simplest runner possible
withTextOutput	Create `TestRunner` object for command window output

Examples

Create TestRunner Object Configured for Text Output

Add `matlab.unittest` classes to the current import list.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
```

Create a `TestSuite` array.

```
suite = TestSuite.fromClass(?mypackage.MyTestClass);
```

Create the `TestRunner` object and run the suite.

```
runner = TestRunner.withTextOutput;
result = run(runner,suite);
```

Include Prebuilt Fixture

This example uses a shared test fixture and then specifies the fixture as prebuilt. The test runner does not set up and tear down the prebuilt fixture. Since the test assumes that the fixture exists, you must manually perform the setup work that the fixture ordinarily performs.

Create a test class in a file in your working folder. The test class uses a `PathFixture` as a shared test fixture. This example assumes that the subfolder, `helperFiles`, exists in your working folder.

```
classdef (SharedTestFixtures={ ...
        matlab.unittest.fixtures.PathFixture('helperFiles')}) ...
        SampleTest < matlab.unittest.TestCase
    methods(Test)
        function test1(testCase)
            f = testCase.getSharedTestFixtures;

            import matlab.unittest.constraints.ContainsSubstring
            testCase.assertThat(path,ContainsSubstring(f.Folder))
        end
    end
end
```

Create a test suite and test runner at the command prompt.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;

suite = TestSuite.fromClass(?SampleTest);
runner = TestRunner.withTextOutput;
```

Run the tests using the shared test fixture. In this case, the fixture is not prebuilt.

```
runner.run(suite);
```

```
Setting up PathFixture
Done setting up PathFixture: Added 'C:\Work\helperFiles' to the path.
__________

Running SampleTest
.
Done SampleTest
__________

Tearing down PathFixture
Done tearing down PathFixture: Restored the path to its original state.
__________
```

The test runner sets up and tears down the shared test fixture.

Create an instance of the fixture and add it to the test runner.

```
f = matlab.unittest.fixtures.PathFixture('helperFiles');
runner.PrebuiltFixtures = f;
```

Manually add the `'helperFiles'` folder to your path. The `PathFixture` adds the specified folder to your path, and the tests rely on this setup action. However, since the fixture is defined as prebuilt, the test runner does not perform set up or tear down actions, and you must perform them manually. In this case, if you do not manually add it to your path, the test fails.

```
p = fullfile(pwd,'helperFiles');
oldPath = addpath(p);
```

Run the tests.

```
runner.run(suite);
```

```
Running SampleTest
.
```

```
Done SampleTest
__________
```

The test runner assumes that the fixture is prebuilt and does not set it up or tear it down.

Manually reset your path.

```
path(oldPath)
```

- "Write Tests Using Shared Fixtures"

See Also

See Also

TestResult | TestSuite

Topics

"Write Tests Using Shared Fixtures"

Introduced in R2013a

addPlugin

Class: matlab.unittest.TestRunner
Package: matlab.unittest

Add plugin to `TestRunner` object

Syntax

```
addPlugin(runner,plugin)
```

Description

`addPlugin(runner,plugin)` adds `plugin` to `runner`.

Input Arguments

`runner`

`matlab.unittest.TestRunner` object.

Default:

`plugin`

Mechanism provided to customize the manner in which a `TestSuite` array is run, specified as a `TestRunnerPlugin` object.

Default:

Examples

Run Test with Custom Plugin

Add `matlab.unittest` classes to the current import list.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
```

Create a `TestSuite` array.

```
suite = TestSuite.fromClass(?mypackage.MyTestClass);
```

Create a `TestRunner` object.

```
runner = TestRunner.withNoPlugins;
```

Add a custom plugin.

```
import matlab.unittest.plugins.DiagnosticsValidationPlugin;
runner.addPlugin(DiagnosticsValidationPlugin);
```

Run the test.

```
result = run(runner,suite);
```

See Also

run

Class: matlab.unittest.TestRunner
Package: matlab.unittest

Run all tests in `TestSuite` array

Syntax

```
result = run(runner,suite)
```

Description

`result = run(runner,suite)` runs the `TestSuite` array defined by `suite` using the `TestRunner` object provided in `runner`, and returns the result in `result`.

This method runs all of the appropriate methods of the `TestCase` class to set up fixtures and run test content. It handles errors and qualification failures and records the information in `result`.

Input Arguments

`runner`

`matlab.unittest.TestRunner` object.

Default:

`suite`

Set of tests, specified as a `matlab.unittest.TestSuite` array.

Output Arguments

result

A `matlab.unittest.TestResult` object containing the result of the test run. `result` is the same size as `suite` and each element is the result of the corresponding element in `suite`.

Examples

Run All Tests in a Package

Add `matlab.unittest` classes to the current import list.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
```

Create a test suite, and a test runner that displays text.

```
suite = TestSuite.fromClass(?mypackage.MyTestClass);
runner = TestRunner.withTextOutput;
```

Run the test suite.

```
result = runner.run(suite)
```

See Also

See Also

matlab.unittest.TestSuite.run | matlab.unittest.TestCase.run

runInParallel

Class: matlab.unittest.TestRunner
Package: matlab.unittest

Run all tests in `TestSuite` array in parallel

Syntax

```
result = runInParallel(runner,suite)
```

Description

`result = runInParallel(runner,suite)` runs all tests in the `TestSuite` array in parallel and returns the results in a `TestResult` object. The `runInParallel` method divides `suite` into separate groups and uses `runner` to run each group on the current parallel pool.

Note: The `runInParallel` method requires the Parallel Computing Toolbox. The testing framework might vary the order and number of groups or which tests it includes in each group.

When you select a test suite to run in parallel, consider possible resource contention. For example, if your test fixtures access global resources, such as a shared file on the same network, the parallel sessions could conflict with each other. In such cases, consider using a prebuilt shared test fixture.

Input Arguments

`runner` — Test runner for parallel test groups

`matlab.unittest.TestRunner` instance

Test runner for parallel test groups, specified as a `matlab.unittest.TestRunner` instance.

Consider your test runner configuration before running tests in parallel. Since the `runInParallel` method runs separate groups of tests on different workers, some plugins, such as `StopOnFailuresPlugin` or `CodeCoveragePlugin`, are not well suited for parallelization. The framework does not support running parallelized tests using a test runner with a custom plugin.

`suite` — Set of tests to run in parallel
`matlab.unittest.Test` array

Set of tests to run in parallel, specified as a `matlab.unittest.Test` array.

Examples

Run Tests in Parallel

Create the following parameterized test in a file in your current working folder.

```
classdef TestRand < matlab.unittest.TestCase
    properties (TestParameter)
        dim1 = createDimensionSizes;
        dim2 = createDimensionSizes;
        dim3 = createDimensionSizes;
        type = {'single','double'};
    end

    methods (Test)
        function testRepeatable(testCase,dim1,dim2,dim3)
            state = rng;
            firstRun = rand(dim1,dim2,dim3);
            rng(state)
            secondRun = rand(dim1,dim2,dim3);
            testCase.verifyEqual(firstRun,secondRun);
        end
        function testClass(testCase,dim1,dim2,type)
            testCase.verifyClass(rand(dim1,dim2,type),type)
        end
    end
end

function sizes = createDimensionSizes
% Create logarithmicly spaced sizes up to 100
sizes = num2cell(round(logspace(0,2,10)));
end
```

At the command prompt, create a suite from `TestRand.m` and a test runner that displays text in the Command Window.

```
suite = matlab.unittest.TestSuite.fromClass(?TestRand);
runner = matlab.unittest.TestRunner.withTextOutput();
```

The suite contains 1200 test elements.

Run the test suite in parallel.

```
result = runInParallel(runner,suite)
```

```
Split tests into 12 groups and running them on 4 workers.
----------------
Finished Group 2
----------------
Running TestRand
..........
..........
..........
..........
..........
..........
..........
..........
..........
..........
.........
Done TestRand
__________


----------------
Finished Group 4
----------------
Running TestRand
..........
..........
..........
..........
..........
..........
..........
..........
..........
```

```
..........
.....
Done TestRand
__________


----------------
Finished Group 3
----------------
Running TestRand
..........
..........
..........
..........
..........
..........
..........
..........
..........
..........
.......
Done TestRand
__________


----------------
Finished Group 1
----------------
Running TestRand
..........
..........
..........
..........
..........
..........
..........
..........
..........
..........
..........
..
Done TestRand
__________
```

```
----------------
Finished Group 7
----------------
Running TestRand
..........
..........
..........
..........
..........
..........
..........
..........
..........
.........
Done TestRand
__________

----------------
Finished Group 5
----------------
Running TestRand
..........
..........
..........
..........
..........
..........
..........
..........
..........
..........
...
Done TestRand
__________

----------------
Finished Group 6
----------------
Running TestRand
..........
..........
```

```
..........
..........
..........
..........
..........
..........
..........
..........
.
Done TestRand
__________


----------------
Finished Group 8
----------------
Running TestRand
..........
..........
..........
..........
..........
..........
..........
..........
..........
.......
Done TestRand
__________


-----------------
Finished Group 11
-----------------
Running TestRand
..........
..........
..........
..........
..........
..........
..........
..........
..........
```

```
.
Done TestRand
__________


-----------------
Finished Group 12
-----------------
Running TestRand
..........
..........
..........
..........
..........
..........
..........
..........
........
Done TestRand
__________


-----------------
Finished Group 10
-----------------
Running TestRand
..........
..........
..........
..........
..........
..........
..........
..........
..........
...
Done TestRand
__________


----------------
Finished Group 9
----------------
Running TestRand
```

```
..........
..........
..........
..........
..........
..........
..........
..........
..........
.....
Done TestRand
__________


result =

  1200x1 TestResult array with properties:

    Name
    Passed
    Failed
    Incomplete
    Duration
    Details

Totals:
   1200 Passed, 0 Failed, 0 Incomplete.
   11.4023 seconds testing time.
```

- "Write Tests Using Shared Fixtures"

See Also

See Also

matlab.unittest.TestRunner.run | matlab.unittest.TestRunner | matlab.unittest.TestSuite | matlab.unittest.TestResult | matlab.unittest.plugins.TestRunnerPlugin

Topics

"Write Tests Using Shared Fixtures"

"Key Problems Addressed by Parallel Computing" (Parallel Computing Toolbox)

Introduced in R2015a

matlab.unittest.TestRunner.withNoPlugins

Class: matlab.unittest.TestRunner
Package: matlab.unittest

Create simplest runner possible

Syntax

```
runner = matlab.unittest.TestRunner.withNoPlugins
```

Description

`runner = matlab.unittest.TestRunner.withNoPlugins` creates a TestRunner that is guaranteed to have no plugins installed and returns it in `runner`. It is the method one can use to create the simplest runner possible without violating the guarantees a test writer has when writing TestCase classes. This runner is a silent runner, meaning that regardless of passing or failing tests, this runner produces no command window output, although the results returned after running a test suite are accurate.

This method can also be used when it is desirable to have complete control over which plugins are installed and in what order. It is the only method guaranteed to produce the minimal TestRunner with no plugins, so one can create it and add additional plugins as desired.

Output Arguments

`runner`

`matlab.unittest.TestRunner` object.

Default:

Attributes

`Static`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Create a Silent TestRunner Object with no Plugins

Add `matlab.unittest` classes to the current import list.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
```

Create a `TestSuite` array.

```
suite = TestSuite.fromClass(?mypackage.MyTestClass);
```

Create a `TestRunner` object.

```
runner = TestRunner.withNoPlugins;
```

```
% Run the suite silently
result = run(runner,suite)
```

Control Plugins

Using the `TestRunner` object created in the previous example, control which plugins are installed and in what order they are installed.

Add `matlab.unittest` class to the current import list.

```
import matlab.unittest.plugins;
```

Add specific plugins.

```
runner.addPlugin(DiagnosticsValidationPlugin);
runner.addPlugin(TestRunProgressPlugin.withVerbosity(2));
```

Rerun the tests.

```
result = run(runner,suite)
```

See Also

matlab.unittest.TestRunner.withTextOutput

Class: matlab.unittest.TestRunner
Package: matlab.unittest

Create `TestRunner` object for command window output

Syntax

```
runner = matlab.unittest.TestRunner.withTextOutput
runner = matlab.unittest.TestRunner.withTextOutput('Verbosity',v)
```

Description

`runner = matlab.unittest.TestRunner.withTextOutput` creates a `TestRunner` object that is configured for running tests from the MATLAB Command Window and returns it in `runner`. The output produced includes test progress as well as diagnostics in the event of test failures.

`runner = matlab.unittest.TestRunner.withTextOutput('Verbosity',v)` reacts to messages logged at or below the specified verbosity level and controls the level of detail about the test run that is displayed in the Command Window.

Input Arguments

v — Verbosity levels supported by test runner

`1 | 2 | 3 | 4 | matlab.unittest.Verbosity` enumeration

Verbosity levels supported by the test runner, specified as an integer value between 1 and 4 or a `matlab.unittest.Verbosity` enumeration object. The runner reacts to diagnostics that are logged at this level and lower. Integer values correspond to the members of the `matlab.unittest.Verbosity` enumeration.

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
1	`matlab.unittest.Verbosity.Terse`	Minimal amount of information

Numeric Representation	Corresponding Enumeration Object	Verbosity Description
2	`matlab.unittest.Verbosity.Concise`	Typical amount of information
3	`matlab.unittest.Verbosity.Detailed`	Supplemental amount of information
4	`matlab.unittest.Verbosity.Verbose`	Surplus of information

Output Arguments

`runner`

`matlab.unittest.TestRunner` object.

Default:

Attributes

`Static`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Display Test Results in Command Window

Add `matlab.unittest` classes to the current import list.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
```

Create a `TestSuite` array.

```
suite = TestSuite.fromClass(?mypackage.MyTestClass);
```

Create a `TestRunner` object that produced output to the Command Window.

```
runner = TestRunner.withTextOutput;

% Run the suite
result = run(runner,suite)
```

Specify Output Verbosity

Create the follow class In a file in your current working folder, `ExampleLogTest.m`.

```
classdef ExampleLogTest < matlab.unittest.TestCase
    methods(Test)
        function testOne(testCase)
            log(testCase,matlab.unittest.Verbosity.Detailed,'Starting Test')
            log(testCase,'Testing 5==5')
            testCase.verifyEqual(5,5)
            log(testCase,matlab.unittest.Verbosity.Verbose,'Test Complete')
        end
    end
end
```

At the command prompt, run the test.

```
result = run(ExampleLogTest);
```

```
Running ExampleLogTest
.
Done ExampleLogTest
__________
```

Create a test runner to display logged messages at verbosity level 4 and lower, and then run the test.

```
import matlab.unittest.TestRunner
import matlab.unittest.TestSuite
suite = TestSuite.fromClass(?ExampleLogTest);
runner = TestRunner.withTextOutput('Verbosity',4);

results = runner.run(suite);
```

```
 Running ExampleLogTest
  Setting up ExampleLogTest
  Done setting up ExampleLogTest in 0 seconds
   Running ExampleLogTest/testOne
    Evaluating Test: testOne
[Detailed] Diagnostic logged (2014-04-18T14:28:19): Starting Test
```

```
[Concise] Diagnostic logged (2014-04-18T14:28:19): Testing 5==5
[Verbose] Diagnostic logged (2014-04-18T14:28:20): Test Complete
  Done ExampleLogTest/testOne in 0.21106 seconds
 Tearing down ExampleLogTest
 Done tearing down ExampleLogTest in 0 seconds
Done ExampleLogTest in 0.21106 seconds
```

See Also

See Also

matlab.unittest.Verbosity | matlab.unittest.fixtures.Fixture.log | matlab.unittest.TestCase.log | run

matlab.unittest.TestSuite class

Package: matlab.unittest

Class for grouping tests to run

Description

The `matlab.unittest.TestSuite` class is the fundamental interface used to group and run a set of tests in the unit test framework. The `matlab.unittest.TestRunner` object can only run arrays of `TestSuite` objects.

Construction

`TestSuite` arrays are created using static methods of the `TestSuite` class. These methods may return subclasses of the `TestSuite` class depending on the method call and context.

Methods

fromClass	Create suite from `TestCase` class
fromFile	Create `TestSuite` array from test file
fromFolder	Create `TestSuite` array from all tests in folder
fromMethod	Create `TestSuite` array from single test method
fromName	Create `Test` object from name of test element
fromPackage	Create `TestSuite` array from all tests in package
run	Run `TestSuite` array using `TestRunner` object configured for text output
selectIf	Select test suite elements that satisfy conditions

Examples

Create Test Suite of Every Type of Test Set

Add the `matlab.unittest.TestSuite` class to the current import list.

```
import matlab.unittest.TestSuite;
```

Create test suites using each method.

```
fileSuite    = TestSuite.fromFile('SomeTestFile.m');
folderSuite  = TestSuite.fromFolder(pwd);
packageSuite = TestSuite.fromPackage('mypackage.subpackage');
classSuite   = TestSuite.fromClass(?mypackage.MyTestClass);
methodSuite  = TestSuite.fromMethod(?SomeTestClass,'testMethod');
```

Concatenate the suites.

```
largeSuite = [fileSuite, folderSuite, packageSuite, classSuite, methodSuite];
```

Run the full suite.

```
result = run(largeSuite)
```

See Also

See Also

Test | TestResult | TestRunner

matlab.unittest.TestSuite.fromClass

Class: matlab.unittest.TestSuite
Package: matlab.unittest

Create suite from `TestCase` class

Syntax

```
suite = matlab.unittest.TestSuite.fromClass(testClass)
suite = matlab.unittest.TestSuite.fromClass(testClass,s)
suite = matlab.unittest.TestSuite.fromClass( ___ ,Name,Value)
```

Description

`suite = matlab.unittest.TestSuite.fromClass(testClass)` creates a `TestSuite` array from all of the `Test` methods contained in `testClass` and returns that array in `suite`.

`suite = matlab.unittest.TestSuite.fromClass(testClass,s)` creates a `TestSuite` array from all of the `Test` methods contained in `testClass` that satisfy the conditions specified by the selector, `s`.

`suite = matlab.unittest.TestSuite.fromClass( ___ ,Name,Value)` creates a `TestSuite` array with additional options specified by one or more `Name,Value` pair arguments. You can use this syntax with any of the input arguments of the previous syntaxes.

Input Arguments

`testClass`

Class containing test methods, specified as a `meta.class` instance. Use the `?` operator to create a `meta.class` instance. `testClass` must derive from `matlab.unittest.TestCase`.

s

Selector, specified as an instance of a class from the `matlab.unittest.selector` package.

Name-Value Pair Arguments

`'BaseFolder'`

Character vector or string scalar indicating the name of the parent of the top-level package folder that contains the file defining the test class or function. This argument filters `TestSuite` array elements. For a test element to be included in the suite, the test element must be contained in the specified base folder. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'Name'`

Character vector or string scalar indicating the name of the suite element. This argument filters `TestSuite` array elements. To include a test element in the suite, the `Name` property of the test element must match the specified name. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterName'`

Character vector or string scalar indicating the name of a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterProperty'`

Character vector or string scalar indicating the name of a property that defines a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ProcedureName'`

Name of test procedure, specified as a character vector or string scalar. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

In a class-based test, the `ProcedureName` is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title. Unlike `Name`, the name of the test procedure does not include any class or package name or information about parameterization.

`'Tag'`

Character vector or string scalar indicating the name of the tag applied to the test suite element. This argument filters `TestSuite` array elements. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match exactly one character.

Output Arguments

`suite`

Set of tests, specified as a `matlab.unittest.Test` array.

Attributes

`Static`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Run Tests in a Package Class

Add the `matlab.unittest.TestSuite` class to the current import list.

```
import matlab.unittest.TestSuite;
```

```
suite = TestSuite.fromClass(?mypackage.MyTestClass);
result = run(suite)
```

Run Tests in a Class Without a Package

Add the `matlab.unittest.TestSuite` class to the current import list.

```
import matlab.unittest.TestSuite;

suite = TestSuite.fromClass(?MyTestClass);
result = run(suite)
```

Create Suite of Test Elements Using Selector

In your working folder, create the following `testZeros.m` test file. This class contains four test methods.

```
classdef testZeros < matlab.unittest.TestCase
    properties (TestParameter)
        type = {'single','double','uint16'};
        outSize = struct('s2d',[3 3], 's3d',[2 5 4]);
    end

    methods (Test)
        function testClass(testCase, type, outSize)
            testCase.verifyClass(zeros(outSize,type), type);
        end

        function testSize(testCase, outSize)
            testCase.verifySize(zeros(outSize), outSize);
        end

        function testDefaultClass(testCase)
            testCase.verifyClass(zeros, 'double');
        end
        function testDefaultSize(testCase)
            testCase.verifySize(zeros, [1 1]);
        end

        function testDefaultValue(testCase)
            testCase.verifyEqual(zeros,0);
        end
    end
end
```

The test class contains two parameterized test methods, `testClass` and `testSize`.

At the command prompt, create a test suite from the test elements that tests the `'double'` data type.

```
import matlab.unittest.TestSuite;
import matlab.unittest.selectors.HasParameter;
```

```
suite = TestSuite.fromClass(?testZeros, ...
    HasParameter('Property','type','Name','double'));
{suite.Name}'
```

```
ans =

    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
```

Create Suite of Test Elements Using Name-Value Arguments

Create the `testZeros.m` class from the previous example.

At the command prompt, create a test suite from the test elements that tests the `'double'` data type.

```
import matlab.unittest.TestSuite;

suite = TestSuite.fromClass(?testZeros, ...
    'ParameterProperty','type', 'ParameterName','double');
{suite.Name}'
```

```
ans =

    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
```

Tips

- `testClass` must be on the MATLAB path when using this method to create `suite`, as well as when `suite` is run.

See Also

See Also

fromMethod | fromPackage | `matlab.unittest.selectors` | TestRunner

Introduced in R2013a

matlab.unittest.TestSuite.fromFile

Class: matlab.unittest.TestSuite
Package: matlab.unittest

Create `TestSuite` array from test file

Syntax

```
suite = matlab.unittest.TestSuite.fromFile(file)
suite = matlab.unittest.TestSuite.fromFile(file,s)
suite = matlab.unittest.TestSuite.fromFile( ___ ,Name,Value)
```

Description

`suite = matlab.unittest.TestSuite.fromFile(file)` creates a `TestSuite` array from all of the tests in `file`. When the test suite is run, MATLAB changes the current folder to the folder that defines the test content, and adds it to the path for the duration of the test run.

`suite = matlab.unittest.TestSuite.fromFile(file,s)` creates a `TestSuite` array from all of the tests in `file` that satisfy the conditions specified by the selector, `s`.

`suite = matlab.unittest.TestSuite.fromFile( ___ ,Name,Value)` creates a `TestSuite` array with additional options specified by one or more `Name,Value` pair arguments. You can use this syntax with any of the input arguments of the previous syntaxes.

Input Arguments

`file`

Absolute or relative path to the test file, specified as a character vector or string scalar.

`s`

Selector, specified as an instance of a class from the `matlab.unittest.selector` package.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'BaseFolder'`

Character vector or string scalar indicating the name of the folder that contains the file defining the tests. This argument filters `TestSuite` array elements. For a test element to be included in the suite, the test element must be contained in the specified base folder. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'Name'`

Character vector or string scalar indicating the name of the suite element. This argument filters `TestSuite` array elements. To include a test element in the suite, the `Name` property of the test element must match the specified name. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterName'`

Character vector or string scalar indicating the name of a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterProperty'`

Character vector or string scalar indicating the name of a property that defines a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ProcedureName'`

Name of test procedure, specified as a character vector or string scalar. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

In a class-based test, the `ProcedureName` is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title. Unlike `Name`, the name of the test procedure does not include any class or package name or information about parameterization.

`'Tag'`

Character vector or string scalar indicating the name of the tag applied to the test suite element. This argument filters `TestSuite` array elements. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match exactly one character.

Output Arguments

`suite`

Set of tests, specified as a `matlab.unittest.Test` array.

Attributes

`Static`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Run Tests in Class File

Function for unit testing:

```
function res = add5(x)
% ADD5 Increment input by 5.
if ~isa(x,'numeric')
    error('add5:InputMustBeNumeric','Input must be numeric.')
end
res = x + 5;
```

```
end
```

`TestCase` class containing test methods:

```
classdef Add5Test < matlab.unittest.TestCase
    methods (Test)
        function testDoubleOut(testCase)
            actOutput = add5(1);
            testCase.verifyClass(actOutput,'double')
        end
        function testNonNumericInput(testCase)
            testCase.verifyError(@()add5('0'),'add5:InputMustBeNumeric')
        end
    end
end
```

Create a test suite from the `Add5Test` class file.

```
suite = matlab.unittest.TestSuite.fromFile('Add5Test.m')
```

```
result = run(suite);
```

```
Running Add5Test
..
Done Add5Test
__________
```

Create Suite of Test Elements Using Selector

In your working folder, create `testZeros.m`. This class contains four test methods.

```
classdef testZeros < matlab.unittest.TestCase
    properties (TestParameter)
        type = {'single','double','uint16'};
        outSize = struct('s2d',[3 3], 's3d',[2 5 4]);
    end

    methods (Test)
        function testClass(testCase, type, outSize)
            testCase.verifyClass(zeros(outSize,type), type);
        end

        function testSize(testCase, outSize)
            testCase.verifySize(zeros(outSize), outSize);
        end
```

```
        function testDefaultClass(testCase)
            testCase.verifyClass(zeros, 'double');
        end
        function testDefaultSize(testCase)
            testCase.verifySize(zeros, [1 1]);
        end

        function testDefaultValue(testCase)
            testCase.verifyEqual(zeros,0);
        end
    end
end
```

The test class contains two parameterized test methods, `testClass` and `testSize`.

At the command prompt, create a test suite from all parameterized test methods in `testZeros.m` using the `HasParameter` selector.

```
import matlab.unittest.TestSuite;
import matlab.unittest.selectors.HasParameter;

suite = TestSuite.fromFile('testZeros.m', HasParameter)
```

```
suite =

  1×8 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   5 Unique Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

Create a test suite from only the test elements from the `testSize` method using the `HasName` selector with the `StartsWithSubstring` constraint.

```
import matlab.unittest.selectors.HasName;
import matlab.unittest.constraints.StartsWithSubstring;

suite = TestSuite.fromFile('testZeros.m',...
    HasName(StartsWithSubstring('testZeros/testSize')));
```

```
{suite.Name}'
```

```
ans =

    'testZeros/testSize(outSize=s2d)'
    'testZeros/testSize(outSize=s3d)'
```

The test suite contains the two parameterized tests from the `testSize` method.

Create Suite of Test Elements Using Name-Value Arguments

Create the `testZeros.m` class from the previous example.

At the command prompt, create a test suite from all test methods in `testZeros.m` that have a name starting with `'testZeros/testSize'`. This test suite contains parameterized tests from the `testSize` method.

```
import matlab.unittest.TestSuite;

suite = TestSuite.fromFile('testZeros.m', 'Name', 'testZeros/testSize*');
{suite.Name}'
```

```
ans =

    'testZeros/testSize(outSize=s2d)'
    'testZeros/testSize(outSize=s3d)'
```

To ensure that a test suite is comprised of test elements associated with one particular test method, use the `fromMethod` method of `TestSuite`.

At the command prompt, create a test suite from all test methods in `testZeros.m` that have a name ending in `'Size'`.

```
import matlab.unittest.TestSuite;

suite = TestSuite.fromFile('testZeros.m', 'Name', '*Size');
{suite.Name}'
```

```
ans =

    'testZeros/testDefaultSize'
```

Note that elements from the `testSize` method are not included in the test suite. The name of these elements contains information about the parameterization, and therefore it does not end with `'Size'`.

Create a test suite of all tests that use the parameter name `'double'`.

```
suite = TestSuite.fromFile('testZeros.m', 'ParameterName', 'double');
{suite.Name}'
```

```
ans =

    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
```

To construct the same test suite using selectors, use `suite = TestSuite.fromFile('testZeros.m', HasParameter('Name','double'))`.

See Also

See Also

fromFolder | `matlab.unittest.selectors` | TestRunner

Introduced in R2013a

matlab.unittest.TestSuite.fromFolder

Class: matlab.unittest.TestSuite
Package: matlab.unittest

Create `TestSuite` array from all tests in folder

Syntax

```
suite = matlab.unittest.TestSuite.fromFolder(folder)
suite = matlab.unittest.TestSuite.fromFolder(folder,s)
suite = matlab.unittest.TestSuite.fromFolder( ___ ,Name,Value)
```

Description

`suite = matlab.unittest.TestSuite.fromFolder(folder)` creates a `TestSuite` array from all of the `Test` methods of all concrete `TestCase` classes contained in `folder` and returns that array in `suite`. If tests are function-based or script-based, a `Test` file is included in the `TestSuite` array if it follows the naming convention of starting or ending in the word 'test', which is case-insensitive. Class-based tests do not need to follow this naming convention. The method is not recursive, returning only those tests directly in the specified folder.

When the test suite is run, MATLAB changes the current folder to the folder that defines the test content, and adds it to the path for the duration of the test run.

`suite = matlab.unittest.TestSuite.fromFolder(folder,s)` creates a `TestSuite` array from all of the `Test` methods contained in `folder` that satisfy the conditions specified by the selector, `s`.

`suite = matlab.unittest.TestSuite.fromFolder( ___ ,Name,Value)` creates a `TestSuite` array with additional options specified by one or more `Name,Value` pair arguments. You can use this syntax with any of the input arguments of the previous syntaxes.

Input Arguments

`folder`

Folder containing tests, specified as a character vector or string scalar. `folder` can be either an absolute or relative path to the desired folder.

`s`

Selector, specified as an instance of a class from the `matlab.unittest.selector` package.

Name-Value Pair Arguments

`'BaseFolder'`

Character vector or string scalar indicating the name of the folder that contains the file defining the tests. This argument filters `TestSuite` array elements. For a test element to be included in the suite, the test element must be contained in the specified base folder. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'IncludingSubfolders'`

Indicator for whether to include tests from any `folder` subfolders, excluding package, class, and private folders, specified as `false` or `true` (`logical 0` or `1`). This property is `false` by default. You can specify it as `true` during construction.

`'Name'`

Character vector or string scalar indicating the name of the suite element. This argument filters `TestSuite` array elements. To include a test element in the suite, the `Name` property of the test element must match the specified name. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterName'`

Character vector or string scalar indicating the name of a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterProperty'`

Character vector or string scalar indicating the name of a property that defines a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ProcedureName'`

Name of test procedure, specified as a character vector or string scalar. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

In a class-based test, the `ProcedureName` is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title. Unlike `Name`, the name of the test procedure does not include any class or package name or information about parameterization.

`'Tag'`

Character vector or string scalar indicating the name of the tag applied to the test suite element. This argument filters `TestSuite` array elements. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match exactly one character.

Output Arguments

`suite`

Set of tests, specified as a `matlab.unittest.Test` array.

Attributes

`Static`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Run Tests in Current Folder

Add the `matlab.unittest.TestSuite` class to the current import list.

```
import matlab.unittest.TestSuite;
```

```
suite = TestSuite.fromFolder(pwd);
result = run(suite);
```

Run Tests in Subfolders

```
suite = TestSuite.fromFolder(pwd, 'IncludingSubfolders', true);
result = run(suite);
```

Create Suite of Test Elements Using Selector

In your working folder, create a new folder, `myTests`. In that folder, create the following `testZeros.m` test file. This class contains four test methods.

```
classdef testZeros < matlab.unittest.TestCase
    properties (TestParameter)
        type = {'single','double','uint16'};
        outSize = struct('s2d',[3 3], 's3d',[2 5 4]);
    end

    methods (Test)
        function testClass(testCase, type, outSize)
            testCase.verifyClass(zeros(outSize,type), type);
        end

        function testSize(testCase, outSize)
            testCase.verifySize(zeros(outSize), outSize);
        end

        function testDefaultClass(testCase)
            testCase.verifyClass(zeros, 'double');
        end
        function testDefaultSize(testCase)
            testCase.verifySize(zeros, [1 1]);
        end

        function testDefaultValue(testCase)
            testCase.verifyEqual(zeros,0);
```

```
        end
    end
end
```

The test class contains two parameterized test methods, `testClass` and `testSize`.

At the command prompt, create a test suite from all parameterized tests that use the parameter name `'double'`.

```
import matlab.unittest.TestSuite;
import matlab.unittest.selectors.HasParameter;

suite = TestSuite.fromFolder('myTests', HasParameter('Name','double'));
{suite.Name}'
```

```
ans =

    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
```

Create Suite of Test Elements Using Name-Value Arguments

Create the `myTests` folder and `testZeros.m` class from the previous example.

Create a test suite of all tests that use the parameter name `'double'`.

```
import matlab.unittest.TestSuite;

suite = TestSuite.fromFolder('myTests', 'ParameterName', 'double');
{suite.Name}'
```

```
ans =

    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
```

See Also

See Also

fromFile | `matlab.unittest.selectors` | TestRunner

Introduced in R2013a

matlab.unittest.TestSuite.fromMethod

Class: matlab.unittest.TestSuite
Package: matlab.unittest

Create `TestSuite` array from single test method

Syntax

```
suite = matlab.unittest.TestSuite.fromMethod(testClass,testMethod)
suite = matlab.unittest.TestSuite.fromMethod(testClass,testMethod,s)
suite = matlab.unittest.TestSuite.fromMethod( ___ ,Name,Value)
```

Description

`suite = matlab.unittest.TestSuite.fromMethod(testClass,testMethod)` creates a `TestSuite` array from the test class described by `testClass` and the test method described by `testMethod` and returns it in `suite`.

`suite = matlab.unittest.TestSuite.fromMethod(testClass,testMethod,s)` creates a `TestSuite` array from all of the `Test` methods contained in `testMethod` that satisfy the conditions specified by the selector, `s`.

`suite = matlab.unittest.TestSuite.fromMethod( ___ ,Name,Value)` creates a `TestSuite` array with additional options specified by one or more `Name,Value` pair arguments. You can use this syntax with any of the input arguments of the previous syntaxes.

Input Arguments

`testClass`

Class describing the test methods, specified as a `meta.class` instance which must derive from `matlab.unittest.TestCase`.

`testMethod`

Test method, specified by either the `meta.method` instance or the name as a character vector or string scalar. The method must be defined with a `Test` method attribute.

`s`

Selector, specified as an instance of a class from the `matlab.unittest.selector` package.

Name-Value Pair Arguments

`'BaseFolder'`

Character vector or string scalar indicating the name of the parent of the top-level package folder that contains the file defining the test class or function. This argument filters `TestSuite` array elements. For a test element to be included in the suite, the test element must be contained in the specified base folder. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'Name'`

Character vector or string scalar indicating the name of the suite element. This argument filters `TestSuite` array elements. To include a test element in the suite, the `Name` property of the test element must match the specified name. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterName'`

Character vector or string scalar indicating the name of a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterProperty'`

Character vector or string scalar indicating the name of a property that defines a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

'ProcedureName'

Name of test procedure, specified as a character vector or string scalar. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

In a class-based test, the `ProcedureName` is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title. Unlike `Name`, the name of the test procedure does not include any class or package name or information about parameterization.

'Tag'

Character vector or string scalar indicating the name of the tag applied to the test suite element. This argument filters `TestSuite` array elements. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match exactly one character.

Output Arguments

suite

Set of tests, specified as a `matlab.unittest.Test` array.

Attributes

`Static`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Run a Single Test Method

Add the `matlab.unittest.TestSuite` class to the current import list.

```
import matlab.unittest.TestSuite;
```

```
cls = ?mypackage.MyTestClass;

% Create the suite using the method name
suite = TestSuite.fromMethod(cls, 'testMethod');
result = run(suite)

% Create the suite using the meta.method instance
metaMethod = findobj(cls.MethodList, 'Name', 'testMethod');
suite = TestSuite.fromMethod(cls, metaMethod);
result = run(suite)
```

Create Suite of Test Elements Using Selector

In your working folder, create the following `testZeros.m` test file. This class contains four test methods.

```
classdef testZeros < matlab.unittest.TestCase
    properties (TestParameter)
        type = {'single','double','uint16'};
        outSize = struct('s2d',[3 3], 's3d',[2 5 4]);
    end

    methods (Test)
        function testClass(testCase, type, outSize)
            testCase.verifyClass(zeros(outSize,type), type);
        end

        function testSize(testCase, outSize)
            testCase.verifySize(zeros(outSize), outSize);
        end

        function testDefaultClass(testCase)
            testCase.verifyClass(zeros, 'double');
        end
        function testDefaultSize(testCase)
            testCase.verifySize(zeros, [1 1]);
        end

        function testDefaultValue(testCase)
            testCase.verifyEqual(zeros,0);
        end
    end
end
```

The test class contains two parameterized test methods, `testClass` and `testSize`.

At the command prompt, create a test suite from all parameterized tests from the `testClass` method that use the parameter name `'single'`.

```
import matlab.unittest.TestSuite;
import matlab.unittest.selectors.HasParameter;

suite = TestSuite.fromMethod(?testZeros,'testClass', ...
    HasParameter('Name','single'));
{suite.Name}'
```

```
ans =

    'testZeros/testClass(type=single,outSize=s2d)'
    'testZeros/testClass(type=single,outSize=s3d)'
```

Create Suite of Test Elements Using Name-Value Arguments

Create the `testZeros.m` class from the previous example.

At the command prompt, create a test suite from all parameterized tests from the `testClass` method that use the parameter name `'single'`.

```
import matlab.unittest.TestSuite;

suite = TestSuite.fromMethod(?testZeros,'testClass', ...
    'ParameterName','single');
{suite.Name}'
```

```
ans =

    'testZeros/testClass(type=single,outSize=s2d)'
    'testZeros/testClass(type=single,outSize=s3d)'
```

Tips

- `testClass` must be on the MATLAB path when using this method to create `suite`, as well as when `suite` is run.

See Also

See Also

fromClass | fromPackage | `matlab.unittest.selectors` | TestRunner

Introduced in R2013a

matlab.unittest.TestSuite.fromName

Class: matlab.unittest.TestSuite
Package: matlab.unittest

Create `Test` object from name of test element

Syntax

```
testObj = matlab.unittest.TestSuite.fromName(name)
```

Description

`testObj = matlab.unittest.TestSuite.fromName(name)` creates a scalar `Test` object, `testObj`, from the name of the test element, `name`.

Input Arguments

name

Name of the `matlab.unittest.Test` element, specified as a character vector or string scalar. For class-based tests, `name` contains the name of the `TestCase` class and the test method, as well as information about parameterization. For function-based tests, `name` contains the name of the main function and the local test function. For script-based tests, `name` contains the name of the script and the title of the test section or cell. If the section does not have a title, MATLAB assigns one. The `name` argument corresponds to the `Name` property of the `Test` object.

The test class, function or script described by `name` must be on the MATLAB path when you are creating and running the `TestSuite`.

Attributes

`Static`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Create and Run Test from Test Suite Element

Create a function to test, `add5`, in a file on your MATLAB path.

```
function res = add5(x)
% ADD5 Increment input by 5.
if ~isa(x,'numeric')
    error('add5:InputMustBeNumeric','Input must be numeric.')
end
res = x + 5;
end
```

Create a file, `Add5Test.m`, on your MATLAB path that contains the following `TestCase` class.

```
classdef Add5Test < matlab.unittest.TestCase
    properties (TestParameter)
        Type = {'double','single','int8','int32'};
    end

    methods (Test)
        function testNonNumericInput(testCase)
            testCase.verifyError(@()add5('0'),'add5:InputMustBeNumeric')
        end
        function testResultType(testCase, Type)
            actOutput = add5(cast(1,Type));
            testCase.verifyClass(actOutput, Type)
        end

    end
end
```

At the command prompt, create a test object for the `testNonNumericInput` method in the `Add5Test` class.

```
import matlab.unittest.TestSuite
testObj = TestSuite.fromName('Add5Test/testNonNumericInput');
```

Run the test

```
result = run(testObj);
```

```
Running Add5Test
.
Done Add5Test
__________
```

Create a parameterized test for the `testResultType` method in the `Add5Test` class, and run the test.

```
testObj = TestSuite.fromName('Add5Test/testResultType(Type=single)');
result = run(testObj);
```

```
Running Add5Test
.
Done Add5Test
__________
```

See Also

See Also

TestRunner

matlab.unittest.TestSuite.fromPackage

Class: matlab.unittest.TestSuite
Package: matlab.unittest

Create `TestSuite` array from all tests in package

Syntax

```
suite = matlab.unittest.TestSuite.fromPackage(package)
suite = matlab.unittest.TestSuite.fromPackage(package,s)
suite = matlab.unittest.TestSuite.fromPackage( ___ ,Name,Value)
```

Description

`suite = matlab.unittest.TestSuite.fromPackage(package)` creates a `TestSuite` array from all of the `Test` methods of all the tests contained in `package` and returns that array in `suite`. The method is not recursive, returning only those tests directly in the package specified.

`suite = matlab.unittest.TestSuite.fromPackage(package,s)` creates a `TestSuite` array from all the tests contained in `package` that satisfy the conditions specified by the selector, `s`.

`suite = matlab.unittest.TestSuite.fromPackage( ___ ,Name,Value)` creates a `TestSuite` array with additional options specified by one or more `Name,Value` pair arguments. You can use this syntax with any of the input arguments of the previous syntaxes.

Input Arguments

`package`

The name of the desired package to find tests, specified as a character vector or string scalar.

s

Selector, specified as an instance of a class from the `matlab.unittest.selector` package.

Name-Value Pair Arguments

`'BaseFolder'`

Character vector or string scalar indicating the name of the parent of the top-level package folder that contains the tests. This argument filters `TestSuite` array elements. For a test element to be included in the suite, the test element must be contained in the specified base folder. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'IncludingSubpackages'`

Indicator for whether to include subpackages in the `TestSuite` array, specified as `false` or `true` (`logical 0` or `1`). This property is `false` by default. You can specify it as `true` during construction.

`'Name'`

Character vector or string scalar indicating the name of the suite element. This argument filters `TestSuite` array elements. To include a test element in the suite, the `Name` property of the test element must match the specified name. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterName'`

Character vector or string scalar indicating the name of a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterProperty'`

Character vector or string scalar indicating the name of a property that defines a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

'ProcedureName'

Name of test procedure, specified as a character vector or string scalar. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

In a class-based test, the `ProcedureName` is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title. Unlike `Name`, the name of the test procedure does not include any class or package name or information about parameterization.

'Tag'

Character vector or string scalar indicating the name of the tag applied to the test suite element. This argument filters `TestSuite` array elements. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match exactly one character.

Output Arguments

suite

Set of tests, specified as a `matlab.unittest.Test` array.

Attributes

`Static`	`true`

To learn about attributes of methods, see Method Attributes in the MATLAB Object-Oriented Programming documentation.

Examples

Run All Tests in a Package

Add the `matlab.unittest.TestSuite` class to the current import list.

```
import matlab.unittest.TestSuite;
```

```
suite = TestSuite.fromPackage('mypackage.subpackage');
result = run(suite)
```

Run tests in `mypackage` including all subpackages.

```
suite = TestSuite.fromPackage('mypackage','IncludingSubpackages',true);
result = run(suite)
```

Create Suite of Test Elements Using Selector

In your working folder, create a new package by creating a new folder, `+myPackage`. In that folder, create the following `testZeros.m` test file. This class contains four test methods.

```
classdef testZeros < matlab.unittest.TestCase
    properties (TestParameter)
        type = {'single','double','uint16'};
        outSize = struct('s2d',[3 3], 's3d',[2 5 4]);
    end

    methods (Test)
        function testClass(testCase, type, outSize)
            testCase.verifyClass(zeros(outSize,type), type);
        end

        function testSize(testCase, outSize)
            testCase.verifySize(zeros(outSize), outSize);
        end

        function testDefaultClass(testCase)
            testCase.verifyClass(zeros, 'double');
        end
        function testDefaultSize(testCase)
            testCase.verifySize(zeros, [1 1]);
        end

        function testDefaultValue(testCase)
            testCase.verifyEqual(zeros,0);
        end
    end
end
```

The test class contains two parameterized test methods, `testClass` and `testSize`.

At the command prompt, create a test suite from all parameterized tests that use the parameter property `'outSize'`.

```
import matlab.unittest.TestSuite;
import matlab.unittest.selectors.HasParameter;

suite = TestSuite.fromPackage('myPackage', ...
    HasParameter('Property','outSize'));
{suite.Name}'
```

```
ans =

    'myPackage.testZeros/testClass(type=single,outSize=s2d)'
    'myPackage.testZeros/testClass(type=single,outSize=s3d)'
    'myPackage.testZeros/testClass(type=double,outSize=s2d)'
    'myPackage.testZeros/testClass(type=double,outSize=s3d)'
    'myPackage.testZeros/testClass(type=uint16,outSize=s2d)'
    'myPackage.testZeros/testClass(type=uint16,outSize=s3d)'
    'myPackage.testZeros/testSize(outSize=s2d)'
    'myPackage.testZeros/testSize(outSize=s3d)'
```

Create Suite of Test Elements Using Name-Value Arguments

Create the `+myPackage` folder and `testZeros.m` class from the previous example.

At the command prompt, create a test suite from all parameterized tests that use the parameter property `'outSize'`.

```
import matlab.unittest.TestSuite;

suite = TestSuite.fromPackage('myPackage', ...
    'ParameterProperty', 'outSize');
{suite.Name}'
```

```
ans =

    'myPackage.testZeros/testClass(type=single,outSize=s2d)'
    'myPackage.testZeros/testClass(type=single,outSize=s3d)'
    'myPackage.testZeros/testClass(type=double,outSize=s2d)'
    'myPackage.testZeros/testClass(type=double,outSize=s3d)'
    'myPackage.testZeros/testClass(type=uint16,outSize=s2d)'
    'myPackage.testZeros/testClass(type=uint16,outSize=s3d)'
    'myPackage.testZeros/testSize(outSize=s2d)'
```

```
'myPackage.testZeros/testSize(outSize=s3d)'
```

Tips

- The root folder(s) where `package` is defined must be on the MATLAB path when creating `suite` using this method as well as when `suite` is run.

See Also

See Also

fromClass | fromMethod | `matlab.unittest.selectors` | TestRunner

Introduced in R2013a

run

Class: matlab.unittest.TestSuite
Package: matlab.unittest

Run `TestSuite` array using `TestRunner` object configured for text output

Syntax

```
result = run(suite)
```

Description

`result = run(suite)` runs the `TestSuite` object defined by `suite` using a `TestRunner` object configured for text output.

Input Arguments

`suite`

Set of tests, specified as a `matlab.unittest.TestSuite` array.

Output Arguments

`result`

A `matlab.unittest.TestResult` object containing the result of the test run. `result` is the same size as `suite` and each element is the result of the corresponding element in `suite`.

Examples

Compare TestSuite.run with TestRunner.run

Add `matlab.unittest` classes to the current import list.

```
import matlab.unittest.TestRunner;
import matlab.unittest.TestSuite;
```

Create a test suite and a test runner.

```
suite = TestSuite.fromClass(?mypackage.MyTestClass);
runner = TestRunner.withTextOutput;
```

The following test results are equivalent.

```
result = runner.run(suite)
result = run(suite)
```

Tips

- This is a convenience method which is equivalent to using a `TestRunner` object created from the `TestRunner.withTextOutput` method to run `suite`.

See Also

See Also

matlab.unittest.TestRunner.run | matlab.unittest.TestCase.run

selectIf

Class: matlab.unittest.TestSuite
Package: matlab.unittest

Select test suite elements that satisfy conditions

Syntax

```
newsuite = selectIf(suite,s)
newsuite = selectIf(suite,Name,Value)
```

Description

`newsuite = selectIf(suite,s)` selects from `suite` the test elements that satisfy the conditions specified by the selector, `s`, and returns them in the `TestSuite` array, `newsuite`.

`newsuite = selectIf(suite,Name,Value)` creates a `TestSuite` array with additional options specified by one or more `Name,Value` pair arguments.

Input Arguments

`suite`

Set of tests, specified as a `matlab.unittest.TestSuite` array.

`s`

Selector, specified as an instance of a class from the `matlab.unittest.selector` package.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'BaseFolder'`

Character vector indicating the name of the folder that contains the tests. This argument filters `TestSuite` array elements. For a test element to be included in the suite, the test element must be contained in the specified base folder. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character. For tests defined in packages, the base folder is the parent of the top-level package folder.

`'Name'`

Character vector indicating the name of the suite element. This argument filters `TestSuite` array elements. To include a test element in the suite, the `Name` property of the test element must match the specified name. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterName'`

Character vector indicating the name of a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ParameterProperty'`

Character vector indicating the name of a property that defines a parameter used by the test suite element. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

`'ProcedureName'`

Name of test procedure, specified as a character vector or string scalar. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match to exactly one character.

In a class-based test, the `ProcedureName` is the name of the test method. In a function-based, test it is the name of the local function that contains the test. In a script-based test, it is a name generated from the test section title. Unlike `Name`, the name of

the test procedure does not include any class or package name or information about parameterization.

'Tag'

Character vector or string scalar indicating the name of the tag applied to the test suite element. This argument filters `TestSuite` array elements. This argument filters `TestSuite` array elements. Use the wildcard character, `*`, to match any number of characters. Use the question mark character, `?`, to match exactly one character.

Examples

Select Test Elements Using Selector

In your working folder, create the file `ExampleTest.m` containing the following test class.

```
classdef (SharedTestFixtures={...
        matlab.unittest.fixtures.PathFixture(fullfile(...
        matlabroot, 'help', 'techdoc', 'matlab_oop', 'examples'))})...
        ExampleTest < matlab.unittest.TestCase
    methods(Test)
        function testPathAdd(testCase)
            % test code
        end
        function testOne(testCase)
            % test code
        end
         function testTwo(testCase)
            % test code
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class.

```
import matlab.unittest.TestSuite;
import matlab.unittest.selectors.HasSharedTestFixture;
import matlab.unittest.selectors.HasName;
import matlab.unittest.fixtures.PathFixture;
import matlab.unittest.constraints.EndsWithSubstring;
import matlab.unittest.constraints.ContainsSubstring;
```

```
suite = TestSuite.fromClass(?ExampleTest)
```

```
suite = 

  1×3 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 1 Unique Shared Test Fixture Class, 0 Tags.
```

The test suite contains three test elements.

Create a filtered test suite of tests comprising tests with names that contain the case-insensitive text `'pAtH'`.

```
newSuite = selectIf(suite,HasName(ContainsSubstring('pAtH','IgnoringCase',true)))
```

```
newSuite = 

  Test with properties:

                 Name: 'ExampleTest/testPathAdd'
           BaseFolder: 'C:\work'
        ProcedureName: 'testPathAdd'
    SharedTestFixtures: [1×1 matlab.unittest.fixtures.PathFixture]
      Parameterization: [0×0 matlab.unittest.parameters.EmptyParameter]
                 Tags: {1×0 cell}

Tests Include:
   0 Parameterizations, 1 Unique Shared Test Fixture Class, 0 Tags.
```

Only the `testPathAdd` test is part of the suite.

Alternatively, create the same suite using a name-value pair.

```
newSuite = selectIf(suite,'Name','*Path*');
```

However, unlike the `ContainsSubstring` constraint, the name-value pair does not have an option to ignore case.

Create a filtered suite of tests comprising tests that use a shared path fixture and do not have names ending with `'One'`.

```
newSuite = suite.selectIf(~HasName(EndsWithSubstring('One')) ...
    & HasSharedTestFixture(PathFixture(fullfile(matlabroot, 'help',...
    'techdoc', 'matlab_oop', 'examples'))));
{newSuite.Name}
```

```
ans =

    'ExampleTest/testPathAdd'    'ExampleTest/testTwo'
```

The test suite contains two tests. All of the tests use the specified path fixture, but the test named `'testOne'` is excluded from the suite.

Select Test Elements Using Parameterization

In your working folder, create `testZeros.m`. This class contains four test methods.

```
classdef testZeros < matlab.unittest.TestCase
    properties (TestParameter)
        type = {'single','double','uint16'};
        outSize = struct('s2d',[3 3], 's3d',[2 5 4]);
    end

    methods (Test)
        function testClass(testCase, type, outSize)
            testCase.verifyClass(zeros(outSize,type), type);
        end

        function testSize(testCase, outSize)
            testCase.verifySize(zeros(outSize), outSize);
        end

        function testDefaultClass(testCase)
            testCase.verifyClass(zeros, 'double');
        end
        function testDefaultSize(testCase)
            testCase.verifySize(zeros, [1 1]);
        end

        function testDefaultValue(testCase)
            testCase.verifyEqual(zeros,0);
        end
    end
```

```
end
```

The test class contains two parameterized test methods, `testClass` and `testSize`.

At the command prompt, create a test suite from the file.

```
s = matlab.unittest.TestSuite.fromFile('testZeros.m');
{s.Name}'
```

```
ans =

  11×1 cell array

    'testZeros/testClass(type=single,outSize=s2d)'
    'testZeros/testClass(type=single,outSize=s3d)'
    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
    'testZeros/testClass(type=uint16,outSize=s2d)'
    'testZeros/testClass(type=uint16,outSize=s3d)'
    'testZeros/testSize(outSize=s2d)'
    'testZeros/testSize(outSize=s3d)'
    'testZeros/testDefaultClass'
    'testZeros/testDefaultSize'
    'testZeros/testDefaultValue'
```

The suite contains 11 test elements. Six from the parameterized `testClass` method, two from the parameterized `testSize` method, and one from each of the `testDefaultClass`, `testDefaultSize`, and `testDefaultValue` methods.

Select all of the test elements from parameterized test methods.

```
import matlab.unittest.selectors.HasParameter;

s1 = s.selectIf(HasParameter);
{s1.Name}'
```

```
ans =

  8×1 cell array

    'testZeros/testClass(type=single,outSize=s2d)'
    'testZeros/testClass(type=single,outSize=s3d)'
    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
    'testZeros/testClass(type=uint16,outSize=s2d)'
```

```
    'testZeros/testClass(type=uint16,outSize=s3d)'
    'testZeros/testSize(outSize=s2d)'
    'testZeros/testSize(outSize=s3d)'
```

The suite contains the eight test elements from the two parameterized test methods.

Select all of the test elements from non-parameterized test methods.

```
s2 = s.selectIf(~HasParameter);
{s2.Name}'
```

```
ans =

  3×1 cell array

    'testZeros/testDefaultClass'
    'testZeros/testDefaultSize'
    'testZeros/testDefaultValue'
```

Select all test elements that are parameterized and have a property named `'type'` with a parameter name `'double'`.

```
s3 = s.selectIf('ParameterProperty','type', 'ParameterName','double');
{s3.Name}'
```

```
ans =

  2×1 cell array

    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
```

The resulting suite contains two elements. The `testClass` method is the only method in `testZeros` that uses the `'type'` property, and selecting only `'double'` from the parameters results in two test elements — one for each value of `'outSize'`.

Select all test elements that are parameterized and have a parameters defined by a property starting with `'t'`.

```
s4 = s.selectIf('ParameterProperty','t*');
{s4.Name}'
```

```
ans =

  6×1 cell array
```

```
    'testZeros/testClass(type=single,outSize=s2d)'
    'testZeros/testClass(type=single,outSize=s3d)'
    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s3d)'
    'testZeros/testClass(type=uint16,outSize=s2d)'
    'testZeros/testClass(type=uint16,outSize=s3d)'
```

The resulting suite contains the six parameterized test elements from the `testClass` method. The `testSize` method is parameterized, but the elements from the method are not included in the suite because the method does not use a property that starts with `'t'`.

Select all test elements that are parameterized and test the `zeros` function with a `2-D` array. A parameter value representing a `2-D` array will have a length of `1` (e.g. `zeros(3)`) or `2` (e.g. `zeros(2,3)`).

```
import matlab.unittest.constraints.HasLength;

s5 = s.selectIf(HasParameter('Property','outSize',...
    'Value', HasLength(1)|HasLength(2)));
{s5.Name}'
```

```
ans =

  4×1 cell array

    'testZeros/testClass(type=single,outSize=s2d)'
    'testZeros/testClass(type=double,outSize=s2d)'
    'testZeros/testClass(type=uint16,outSize=s2d)'
    'testZeros/testSize(outSize=s2d)'
```

Select only the test element that tests that the output is a `double` data type and the has the correct size for a `2-D` array.

```
s6 = s.selectIf(HasParameter('Property','type','Name','double')...
    & HasParameter('Property','outSize','Name','s2d'))
```

```
s6 =

  Test with properties:

                 Name: 'testZeros/testClass(type=double,outSize=s2d)'
           BaseFolder: 'C:\work'
```

```
         ProcedureName: 'testClass'
    SharedTestFixtures: [0×0 matlab.unittest.fixtures.EmptyFixture]
      Parameterization: [1×2 matlab.unittest.parameters.TestParameter]
                  Tags: {1×0 cell}

Tests Include:
   2 Unique Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

Select Test Elements Using Tags

Create the following test class in a file, `ExampleTest.m`, in your current working folder.

```
classdef ExampleTest < matlab.unittest.TestCase
    methods (Test)
        function testA (testCase)
            % test code
        end
    end
    methods (Test, TestTags = {'Unit'})
        function testB (testCase)
            % test code
        end
        function testC (testCase)
            % test code
        end
    end
    methods (Test, TestTags = {'Unit','FeatureA'})
        function testD (testCase)
            % test code
        end
    end
    methods (Test, TestTags = {'System','FeatureA'})
        function testE (testCase)
            % test code
        end
    end
end
```

At the command prompt, create a test suite from the `ExampleTest` class and examine the contents.

```
import matlab.unittest.TestSuite
import matlab.unittest.selectors.HasTag

suite = TestSuite.fromClass(?ExampleTest)
```

```
suite =

  1×5 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 3 Unique Tags.
```

Click the hyperlink for `3 Unique Tags` to display all the tags in the suite.

```
       Tag
    __________

    'FeatureA'
    'System'
    'Unit'
```

Select all the test suite elements that have the tag `'Unit'`.

```
s1 = suite.selectIf(HasTag('Unit'))
```

```
s1 =

  1×3 Test array with properties:

    Name
    BaseFolder
    ProcedureName
    SharedTestFixtures
    Parameterization
    Tags

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 2 Unique Tags.
```

Select all the test suite elements that do not contain the tag `'FeatureA'`.

```
s2 =  suite.selectIf(~HasTag('FeatureA'));
```

```
{s2.Name}
```

```
ans =

  1×3 cell array

    'ExampleTest/testB'    'ExampleTest/testC'    'ExampleTest/testA'
```

Select all the test suite elements that have no tags.

```
s3 =  suite.selectIf(~HasTag)
```

```
s3 =

  Test with properties:

                 Name: 'ExampleTest/testA'
           BaseFolder: 'C:\work'
        ProcedureName: 'testA'
    SharedTestFixtures: [0×0 matlab.unittest.fixtures.EmptyFixture]
      Parameterization: [0×0 matlab.unittest.parameters.EmptyParameter]
                 Tags: {1×0 cell}

Tests Include:
   0 Parameterizations, 0 Shared Test Fixture Classes, 0 Tags.
```

See Also

See Also

matlab.unittest.constraints | matlab.unittest.selectors

Introduced in R2014a

texlabel

Format text with TeX characters

Syntax

```
txt = texlabel(f)
txt = texlabel(f,'literal')
```

Description

`txt = texlabel(f)` converts the MATLAB expression `f` into the TeX equivalent for use in text. `texlabel` converts Greek variable names (for example, lambda, delta, and so on) into a character vector that is displayed as Greek letters. The `txt` output is useful as an argument to annotation functions such as `title`, `xlabel`, and `text`.

If `txt` is too long to fit into a figure window, then the center of the expression is replaced with a tilde ellipsis (~~~).

`txt = texlabel(f,'literal')` interprets Greek variable names literally.

Examples

Create Text with TeX Characters

Plot a line. Create text that contains TeX characters and add the text to the line plot.

```
plot((1:10).^2)
txt = texlabel('lambda12^(3/2)/pi - pi*delta^(2/3)');
text(3,90,txt)
```

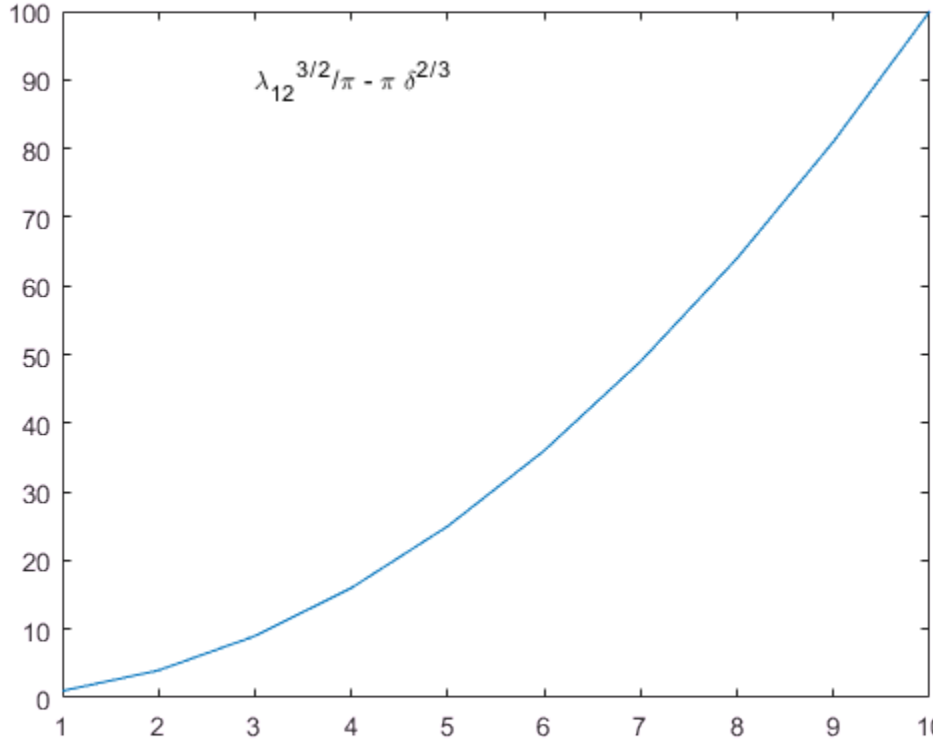

If you include the `'literal'` argument, `texlabel` interprets Greek variable names literally. Add text with the literal variable names to the line plot.

```
text(4,60,texlabel('lambda12^(3/2)/pi - pi*delta^(2/3)','literal'))
```

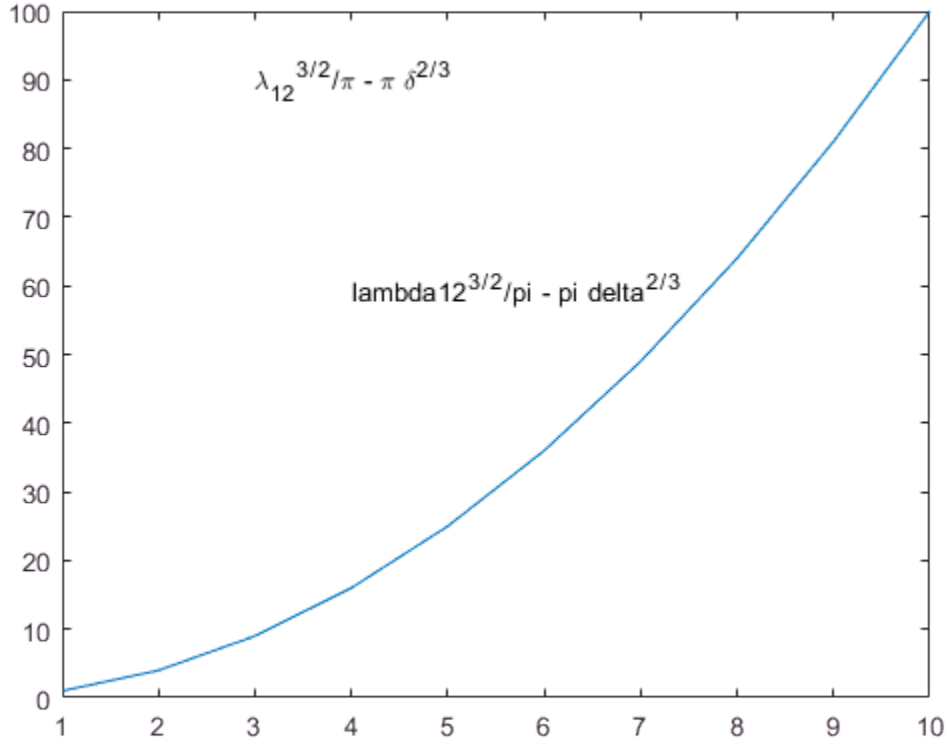

Input Arguments

`f` — Input MATLAB expression
character vector

Input MATLAB expression, specified as a character vector.

Example: `'theta (degrees)'`

Data Types: `char`

See Also

See Also

`text` | `title` | `xlabel` | `ylabel` | `zlabel`

Introduced before R2006a

text

Add text descriptions to data points

Syntax

```
text(x,y,txt)
text(x,y,z,txt)
text( ___ ,Name,Value)
text(ax, ___ )

t = text( ___ )
```

Description

`text(x,y,txt)` adds a text description to one or more data points in the current axes using the text specified by `txt`. To add text to one point, specify `x` and `y` as scalars in data units. To add text to multiple points, specify `x` and `y` as vectors with equal length.

`text(x,y,z,txt)` positions the text in 3-D coordinates.

`text( ___ ,Name,Value)` specifies `Text` object properties using one or more name-value pairs. For example, `'FontSize',14` sets the font size to 14 points. You can specify text properties with any of the input argument combinations in the previous syntaxes. If you specify the `Position` and `String` properties as name-value pairs, then you do not need to specify the `x`, `y`, `z`, and `txt` inputs.

`text(ax, ___ )` creates the text in the axes specified by `ax` instead of in the current axes (`gca`). The option `ax` can precede any of the input argument combinations in the previous syntaxes.

`t = text( ___ )` returns one or more text objects. Use `t` to modify properties of the text objects after they are created. For a list of properties and descriptions, see Text Properties. You can specify an output with any of the previous syntaxes.

Examples

Add Text Description to Data Point

Plot a sine curve. At the point $(\pi, 0)$, add the text description $\sin(\pi)$. Use the TeX markup `\pi` for the Greek letter π. Use `\leftarrow` to display a left-pointing arrow.

```
x = 0:pi/20:2*pi;
y = sin(x);
plot(x,y)
text(pi,0,'\leftarrow sin(\pi)')
```

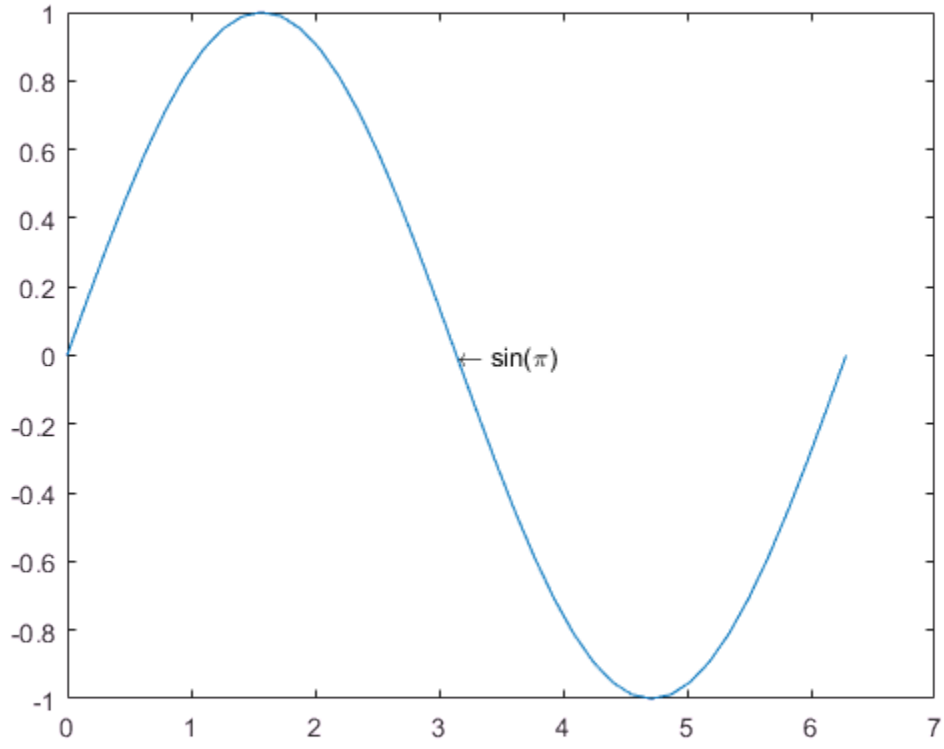

For a list of Greek characters and other TeX markup, see the `Interpreter` property description.

Add Text to Multiple Data Points

Plot a line. Add the same text to two points along the line.

```
x = linspace(-5,5);
y = x.^3-12*x;
plot(x,y)

xt = [-2 2];
yt = [16 -16];
str = 'dy/dx = 0';
text(xt,yt,str)
```

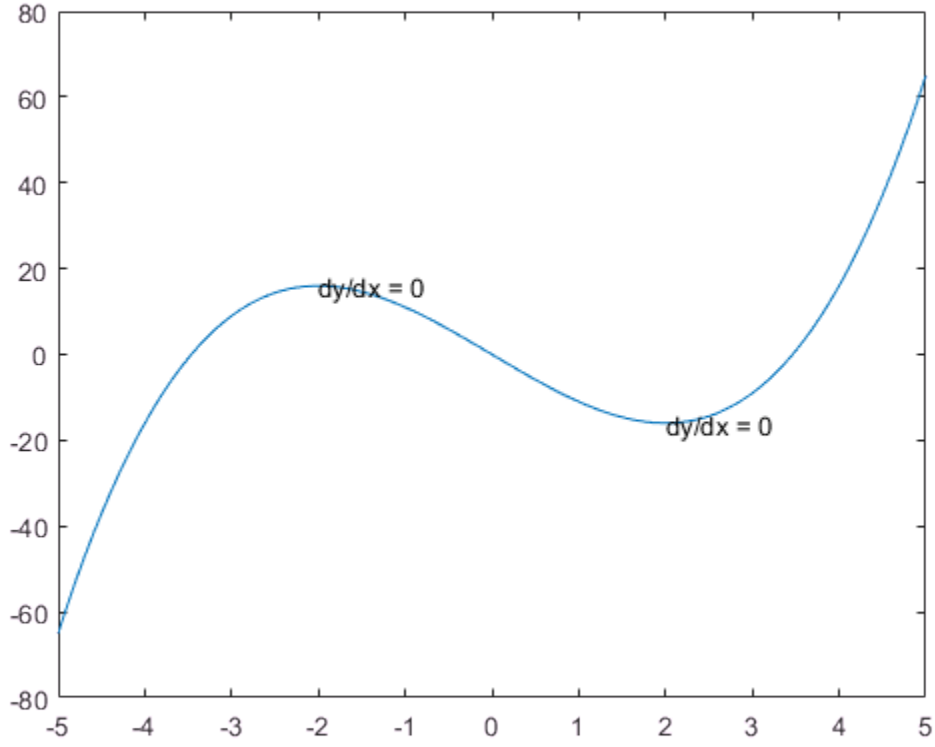

Add different text to each point by specifying `str` as a cell array.

```
x = linspace(-5,5);
y = x.^3-12*x;
plot(x,y)

xt = [-2 2];
yt = [16 -16];
str = {'local max','local min'};
text(xt,yt,str)
```

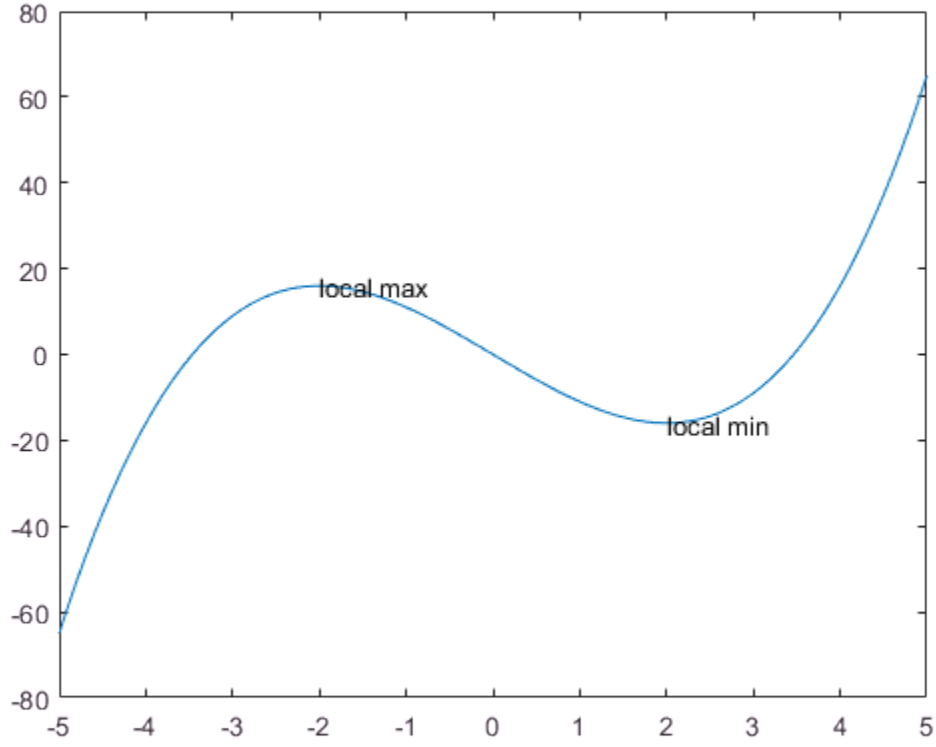

Display Multiline Text

Create a line plot and add one text description to the axes. Display multiline text by specifying `str` as a cell array.

```
plot(1:10)
str = {'A simple plot','from 1 to 10'};
text(2,7,str)
```

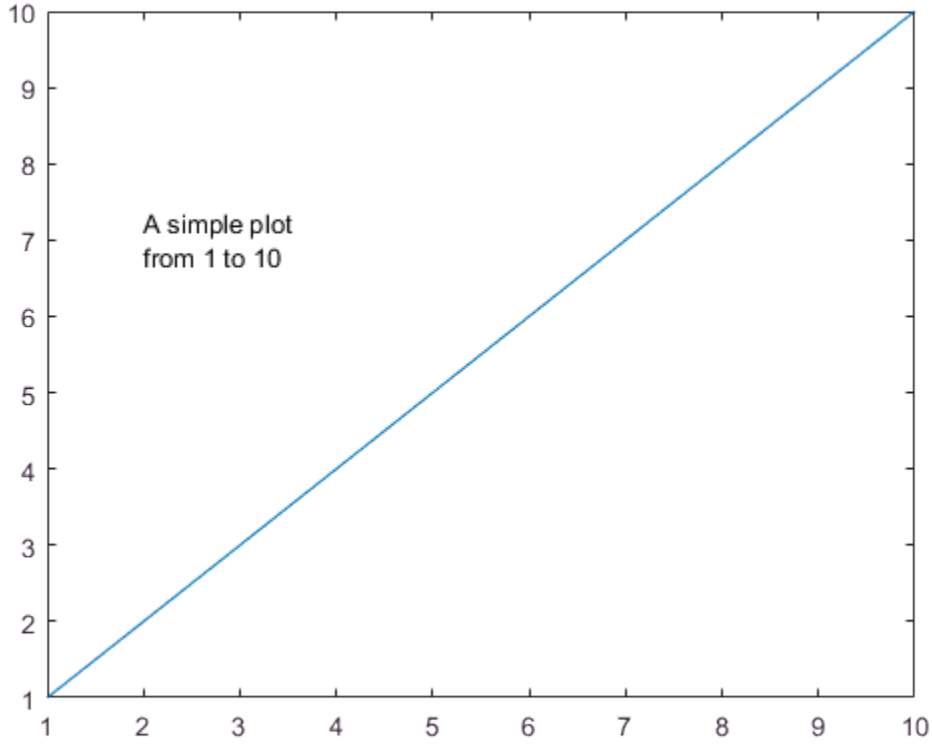

Create a line plot and add two text descriptions to the axes. When adding multiple text descriptions to the axes, display multiline text by specifying nested cell arrays.

```
plot(1:10)
str = {{'A simple plot','from 1 to 10'},'y = x'};
text([2 8],[7 7],str)
```

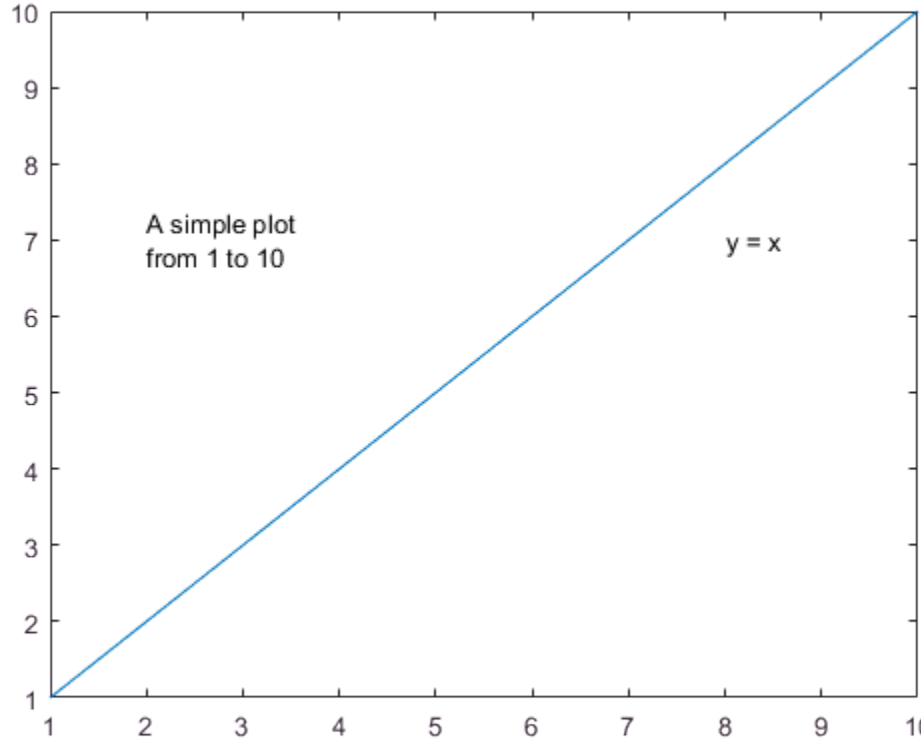

Specify Text Size and Color

Create a line plot and add a text description to the axes. Use red, size 14 font.

```
plot(1:10)
text(2,8,'A Simple Plot','Color','red','FontSize',14)
```

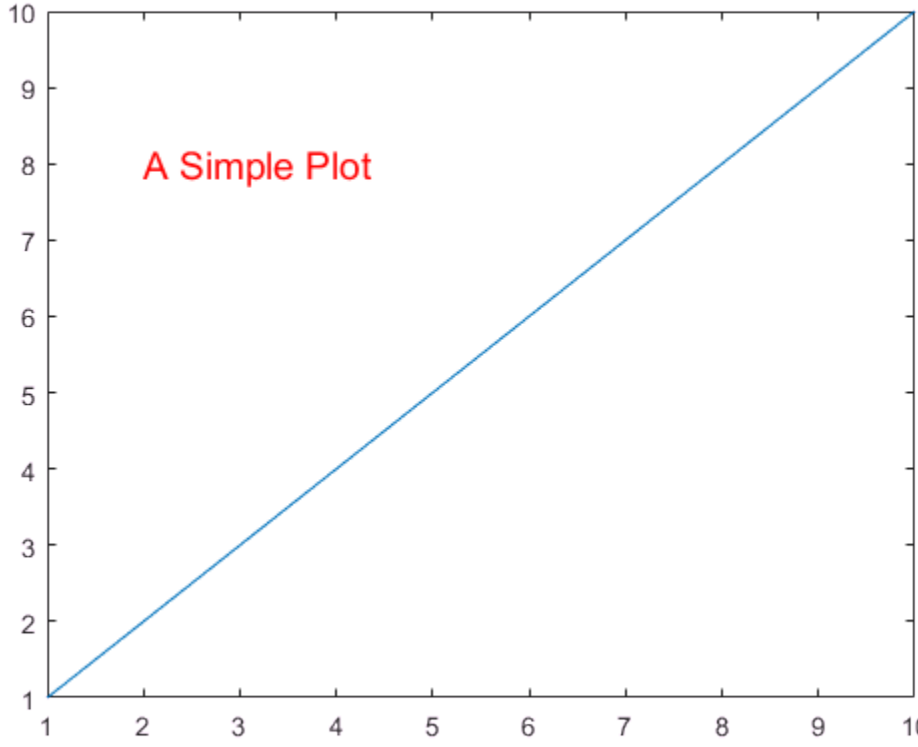

Modify Existing Text

Create a line plot and add two text descriptions along the line. Return the text objects, `t`.

```
x = linspace(-5,5);
y = x.^3-12*x;
plot(x,y)
t = text([-2 2],[16 -16],'dy/dx = 0')
```

```
t =
  2×1 Text array:
```

```
Text    (dy/dx = 0)
Text    (dy/dx = 0)
```

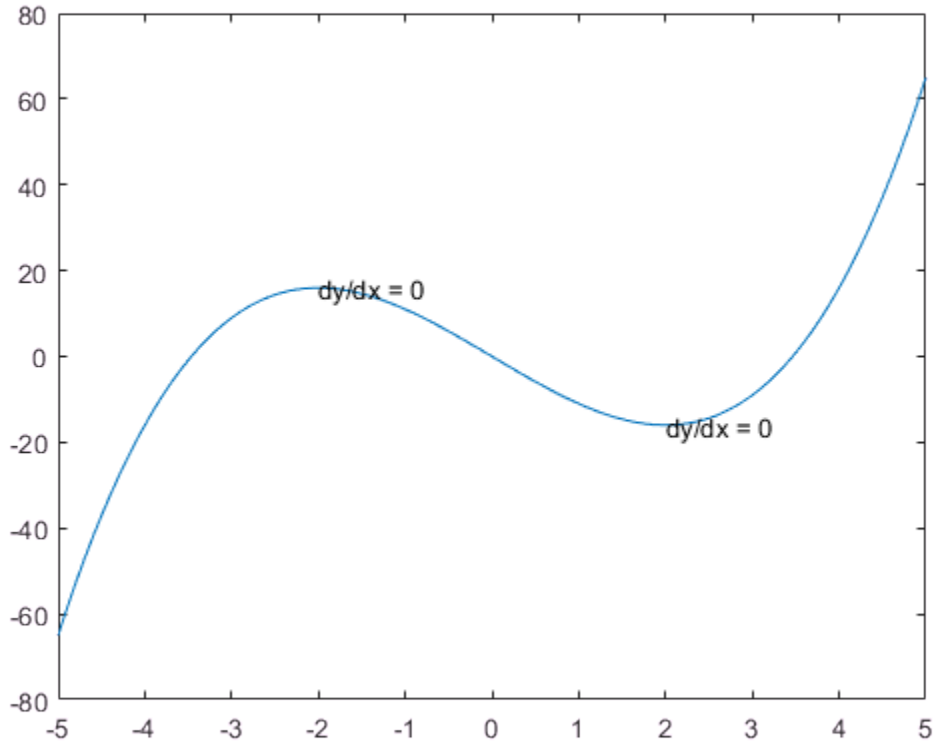

The `text` function creates one text object for each text description. Thus, `t` contains two text objects.

Change the color and font size for the first text object using `t(1)`. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the `set` function instead.

```
t(1).Color = 'red';
t(1).FontSize = 14;
```

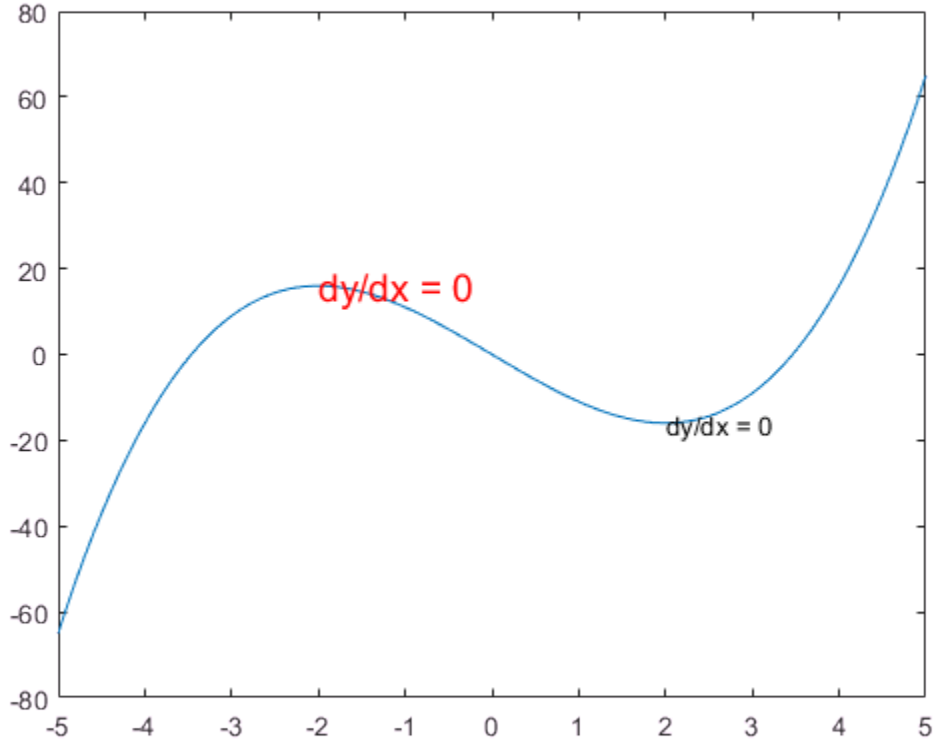

- "Add Text to Specific Points on Graph"
- "Include Variable Values in Graph Text"
- "Greek Letters and Special Characters in Graph Text"
- "Text with Mathematical Expression Using LaTeX"
- "Plot Dates and Durations"

Input Arguments

x — Text placement along *x*-axis
scalar | vector

Text placement along the *x*-axis, specified in one of these forms:

- Scalar — Add text to single point.
- Vector — Add text to multiple points.

`x` and `y` must be equal sizes. The default units are data units. To change the units, set the `Units` property for the `Text` object.

To control the placement of the text with relation to the specified point, use the `HorizontalAlignment`, VerticalAlignment, and Extent properties of the `Text` object.

Data Types: `double` | `categorical` | `datetime` | `duration`

`y` — Text placement along *y*-axis
scalar | vector

Text placement along the *y*-axis, specified in one of these forms:

- Scalar — Add text to single point.
- Vector — Add text to multiple points.

`x` and `y` must be equal sizes. The default units are data units. To change the units, set the `Units` property for the `Text` object.

To control the placement of the text with relation to the specified point, use the `HorizontalAlignment`, VerticalAlignment, and Extent properties of the `Text` object.

Data Types: `double` | `categorical` | `datetime` | `duration`

`z` — Text placement along *z*-axis
0 (default) | scalar | vector

Text placement along the *z*-axis, specified in one of these forms:

- Scalar — Add text to single point.
- Vector — Add text to multiple points.

`x`, `y`, and `z` must be equal sizes. The default units are data units. To change the units, set the `Units` property for the `Text` object.

Data Types: `double` | `categorical` | `datetime` | `duration`

`txt` — Text to display
character vector | character array | cell array

Text to display, specified as a character vector, character array, or cell array.

Text for Single Data Point

To add text to a single point, specify `txt` as a character vector. For example, `text(.5,.5,'my text')`.

For multiline text:

- Use a cell array, where each cell contains a line of text. For example, `text(.5,.5,{'first','second'})`.
- Use a character array with multiple rows, where each row contains the same number of characters. For example, `text(.5,.5,['first '; 'second'])`.
- Use `sprintf` to create a new line character. For example, `text(.5,.5,sprintf('first \nsecond'))`.

Text for Multiple Data Points

To display the same text at each location, specify `txt` as a character vector. For example, `text([0 1],[0 1],'my text')`.

To display different text at each location, use a cell array. For example, `text([0 1],[0 1],{'first','second'})`.

For multiline text, use nested cell arrays. For example, `text([0 1],[0 1],{{'first','new line'},'second'})`.

Greek Letters, Special Characters, and Numeric Variables

To include special characters, such as superscripts, subscripts, Greek letters, or mathematical symbols, use TeX markup. For a list of supported markup, see the `Interpreter` property.

To include numeric variables in the text, use the `num2str` function.

```
v = 42;
txt = ['The value is ',num2str(v)];
```

ax — Axes object
axes object

Axes object. If you do not specify an axes object, then `text` uses the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `text(.5,.5,'my text','FontSize',14,'Color','red')`

The properties listed here are only a subset. For a full list, see Text Properties.

`'FontSize'` — Font size
`10` (default) | scalar value greater than zero

Font size, specified as a scalar value greater than zero in point units. One point equals `1/72` inch. To change the font units, use the `FontUnits` property.

Example: `12`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'FontWeight'` — Thickness of text characters
`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

`'FontName'` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`'Color'` — Text color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. The default color is black with an RGB triplet value of `[0 0 0]`. If you set the color to `'none'`, then the text is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'HorizontalAlignment'` — Horizontal alignment of text with respect to position point
`'left'` (default) | `'center'` | `'right'`

Horizontal alignment of the text with respect to the `x` value in the `Position` property, specified as one of the values in this table. The vertical line indicates where the `x` value lies in relation to the text.

Value	Result
`'left'` (default)	
`'center'`	
`'right'`	

`'Position'` — Location of text
`[0 0 0]` (default) | two-element vector of form `[x y]` | three-element vector of form `[x y z]`

Location of the text, specified as a two-element vector of the form `[x y]` or a three-element vector of the form `[x y z]`. If you omit the third element, `z`, then MATLAB sets it to `0`.

Specify the position using numeric values. To convert datetime or duration values to the appropriate numeric values for a particular coordinate direction, see `ruler2num`.

By default, the position value is defined in data units. To change the units, use the `Units` property.

Example: `[0.5 0.5 0]`

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'Units'` — Position and extent units
`'data'` (default) | `'normalized'` | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

Units	Description
`'data'` (default)	Data coordinates.
`'normalized'`	Normalized with respect to the axes. The lower left corner of the axes maps to `(0,0)` and the upper right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units, except for `'data'`, are measured from the lower left corner of the axes. This property affects the `Position` and `Extent` properties.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the `Text` object, then the order of specification matters. To define the position with particular units, set the `Units` property before the `Position` property.

`'Interpreter'` — Interpretation of text characters
`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value	`'\fontsize{15} text'`

Modifier	Description	Example
	in point units to change the font size.	
`\color{specifier}`	Font color — Set `specifier` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒
`\lambda`	λ	`\Phi`	Φ	`\downarrow`	↓
`\mu`	μ	`\Psi`	Ψ	`\circ`	°

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

Output Arguments

`t` — `Text` objects
`Text` objects

`Text` objects. Use the elements of `t` to modify a specific `Text` object after it is created. For a list of properties, see Text Properties.

Tips

- By default, the Clipping property for text objects is set to `'off'` so the text might appear outside the axes. To clip the text to the axes boundaries, set the property to `'on'`.

See Also

See Also

Functions
`annotation` | `int2str` | `num2str` | `title` | `xlabel` | `ylabel` | `zlabel`

Properties
Text Properties

Topics
"Add Text to Specific Points on Graph"
"Include Variable Values in Graph Text"
"Greek Letters and Special Characters in Graph Text"
"Text with Mathematical Expression Using LaTeX"
"Plot Dates and Durations"

Introduced before R2006a

Text Properties

Control text appearance and behavior

Description

`Text` properties control the appearance and behavior of a `Text` object. By changing property values, you can modify certain aspects of the text.

Starting in R2014b, you can use dot notation to query and set properties.

```
t = text(0.5,0.5,'text here');
s = t.FontSize;
t.FontSize = 12;
```

If you are using an earlier release, use the `get` and `set` functions instead.

Text

`String` — Text to display

`''` (default) | character array | string array | cell array | numeric value

Text to display, specified as a character array, string array, cell array, or numeric value.

Example: `'my label'`

Example: `string('my label')`

Example: `{'first line','second line'}`

Example: `123`

To include numeric variables with text, use the `num2str` function. For example:

```
x = 42;
str = ['The value is ',num2str(x)];
```

To include special characters, such as superscripts, subscripts, Greek letters, or mathematical symbols use TeX markup. For a list of supported markup, see the `Interpreter` property.

To create multiline text:

- Use a string array, where each element contains a line of text, such as `string({'line one','line two'})`.
- Use a cell array, where each cell contains a line of text, such as `{'first line','second line'}`.
- Use a character array, where each row contains the same number of characters, such as `['abc'; 'ab ']`.
- Use `sprintf` to create text with a new line character, such as `sprintf('first line \n second line')`. This property converts text with new line characters to cell arrays.

Text that contains only a numeric value is converted using `sprintf('%g',value)`. For example, `12345678` displays as `1.23457e+07`.

Note: The words `default`, `factory`, and `remove` are reserved words that will not appear in text when quoted as a normal characters. To display any of these words individually, precede them with a backslash, such as `'\default'` or `'\remove'`.

`Interpreter` — Interpretation of text characters
`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value in point units to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Font color — Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\ast	*	\chi	χ	\infty	∞
\beta	β	\psi	ψ	\clubsuit	♣
\gamma	γ	\omega	ω	\diamondsuit	♦
\delta	δ	\Gamma	Γ	\heartsuit	♥
\epsilon	ε	\Delta	Δ	\spadesuit	♠
\zeta	ζ	\Theta	Θ	\leftrightarrow	↔
\eta	η	\Lambda	Λ	\leftarrow	←
\theta	θ	\Xi	Ξ	\Leftarrow	⇐
\vartheta	ϑ	\Pi	Π	\uparrow	↑
\iota	ι	\Sigma	Σ	\rightarrow	→
\kappa	κ	\Upsilon	ϒ	\Rightarrow	⇒
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	ο
\rfloor	⌋	\neg	¬	\nabla	∇

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\lfloor	⌊	\times	x	\ldots	…
\perp	⊥	\surd	√	\prime	′
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

Font Style

`Color` — Text color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. The default color is black with an RGB triplet value of `[0 0 0]`. If you set the color to `'none'`, then the text is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

FontName — Font name
system supported font name | 'FixedWidth'

Font name, specified as the name of the font to use or 'FixedWidth'. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use 'FixedWidth'. The 'FixedWidth' value relies on the root FixedWidthFontName property. Setting the root FixedWidthFontName property causes an immediate update of the display to use the new font.

Example: 'Cambria'

FontSize — Font size
10 (default) | scalar value greater than zero

Font size, specified as a scalar value greater than zero in point units. One point equals 1/72 inch. To change the font units, use the FontUnits property.

Example: 12

Data Types: single | double | int8 | int16 | int32 | int64 | uint8 | uint16 | uint32 | uint64

`FontUnits` — Font size units

`'points'` (default) | `'inches'` | `'centimeters'` | `'normalized'` | `'pixels'`

Font size units, specified as one of the values in this table.

Units	Description
`'points'`	Points. One point equals 1/72 inch.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'normalized'`	Interpret font size as a fraction of the axes plot box height. If you resize the axes, the font size modifies accordingly. For example, if the `FontSize` is `0.1` in normalized units, then the text is 1/10 of the plot box height.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

If you set both the font size and the font units in one function call, you must set the `FontUnits` property first so that the axes correctly interprets the specified font size.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font might look the same as the normal font.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

`FontSmoothing` — Smooth font character appearance

`'on'` (default) | `'off'`

Smooth font character appearance, specified as one of these values:

- `'on'` — Apply font smoothing. Reduce the appearance of jaggedness in the text characters to make the text easier to read.
- `'off'` — Do not apply font smoothing.

Text Box

`EdgeColor` — Color of box outline

`'none'` (default) | RGB triplet | character vector of color name

Color of box outline, specified as `'none'`, a three-element RGB triplet, or a character vector of a color name. The default edge color of `'none'` makes the box outline invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: [0 0 1]

BackgroundColor — Color of text box background

'none' (default) | RGB triplet | character vector of color name

Color of text box background, specified as 'none', a three-element RGB triplet, or a character vector of a color name. The default background color of 'none' makes the text box background transparent.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: 'blue'

Example: `[0 0 1]`

`Margin` — Space around text within the text box

`3` (default) | scalar numeric value

The space around the text within the text box, specified as scalar numeric value in point units.

MATLAB uses the `Extent` property value plus the `Margin` property value to determine the size of the text box.

Example: `8`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`LineStyle` — Line style of box outline

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style of box outline, specified as one of the options in this table.

Line Style	Description	Resulting Line
`'-'`	Solid line	
`'--'`	Dashed line	
`':'`	Dotted line	
`'-.'`	Dash-dotted line	
`'none'`	Line is invisible	

`LineWidth` — Width of box outline

`0.5` (default) | scalar numeric value

Width of box outline, specified as a scalar numeric value in point units. One point equals 1/72 inch.

Example: `1.5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Location and Size

`Position` — Location of text

`[0 0 0]` (default) | two-element vector of form `[x y]` | three-element vector of form `[x y z]`

Location of the text, specified as a two-element vector of the form `[x y]` or a three-element vector of the form `[x y z]`. If you omit the third element, `z`, then MATLAB sets it to `0`.

Specify the position using numeric values. To convert datetime or duration values to the appropriate numeric values for a particular coordinate direction, see `ruler2num`.

By default, the position value is defined in data units. To change the units, use the `Units` property.

Example: `[0.5 0.5 0]`

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Extent` — Size and location of rectangle that encloses text

four-element vector

This property is read-only.

Size and location of the rectangle that encloses the text, not including the margin, returned as a four-element vector of the form `[left bottom width height]`. The first two elements, `left` and `bottom`, define the position of the lower left corner of the rectangle. The last two elements, `width` and `height`, define the dimensions of the rectangle.

By default, the extent value is defined in data units. To change the units, use the `Units` property.

Example: `[0.5 0.5 0.4 0.2]`

`Units` — Position and extent units

`'data'` (default) | `'normalized'` | `'inches'` | `'centimeters'` | `'characters'` | `'points'` | `'pixels'`

Position units, specified as one of the values in this table.

Units	Description
`'data'` (default)	Data coordinates.
`'normalized'`	Normalized with respect to the axes. The lower left corner of the axes maps to `(0,0)` and the upper right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'characters'`	Based on the default system font character size. • Character width = width of letter `x`. • Character height = distance between the baselines of two lines of text.
`'points'`	Points. One point equals 1/72 inch.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

All units, except for `'data'`, are measured from the lower left corner of the axes. This property affects the `Position` and `Extent` properties.

If you specify the `Position` and `Units` properties as `Name,Value` pairs when creating the `Text` object, then the order of specification matters. To define the position with particular units, set the `Units` property before the `Position` property.

`Rotation` — Text orientation

0 (default) | scalar value in degrees

Text orientation, specified as a scalar value in degrees. The default rotation of 0 degrees makes the text horizontal. For vertical text, set this property to `90` or `-90`. Positive values rotate the text counterclockwise. Negative values rotate the text clockwise.

Example: `90`

Example: `-90`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`HorizontalAlignment` — Horizontal alignment of text with respect to position point

`'left'` (default) | `'center'` | `'right'`

Horizontal alignment of the text with respect to the `x` value in the `Position` property, specified as one of the values in this table. The vertical line indicates where the `x` value lies in relation to the text.

Value	Result
`'left'` (default)	
`'center'`	
`'right'`	

`VerticalAlignment` — Vertical alignment of text with respect to position point

`'middle'` (default) | `'top'` | `'bottom'` | `'baseline'` | `'cap'`

Vertical alignment of the text with respect to the `y` value in the `Position` property, specified as one of the values in this table. The horizontal line indicates where the `y` value lies in relation to the text.

Value	Result
`'middle'`	

Value	Result
`'top'`	
`'cap'`	
`'bottom'`	
`'baseline'`	

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the object.
- `'off'` — Hide the object without deleting it. You still can access the properties of an invisible object.

`Clipping` — Clipping of text to axes plot box

`'off'` (default) | `'on'`

Clipping of the text to the axes plot box, which is the box defined by the axis limits, specified as one of these values:

- `'off'` — Do not clip the text. Portions of it might appear outside the axes plot box.
- `'on'` — Clips the text to the axes plot box.
  - If the axes `ClippingStyle` property is set to `'3dbox'`, which is the default, then MATLAB either displays the entire text or none of the text, depending on the text position. If the point defined by the text `Position` property lies inside the axes, then MATLAB displays the entire text. If the point lies outside the axes, then MATLAB displays none of it.

- If the axes `ClippingStyle` property is set to `'rectangle'`, then MATLAB displays portions of the text lying inside the axes plot box and does not display portions of the text lying outside the axes plot box.

Note: If the `Clipping` property of the associated axes is set to `'on'`, which is the default, then each individual object controls its own clipping behavior. If the `Clipping` property of the axes is set to `'off'`, then MATLAB does not clip any objects in the axes, regardless of the `Clipping` property of the individual object.

`EraseMode` — (removed) Technique to draw and erase objects

`'normal'` (default) | `'none'` | `'xor'` | `'background'`

Note: `EraseMode` has been removed. You can delete code that accesses the `EraseMode` property with minimal impact. If you were using `EraseMode` to create line animations, use the `animatedline` function instead.

Technique to draw and erase objects, specified as one of these values:

- `'normal'` — Redraw the affected region of the display, performing the three-dimensional analysis necessary to correctly render all objects. This mode produces the most accurate picture, but is the slowest. The other modes are faster, but do not perform a complete redraw and, therefore, are less accurate.
- `'none'` — Do not erase the object when it is moved or destroyed. After you erase the object with `EraseMode,'none'`, it is still visible on the screen. However, you cannot print the object because MATLAB does not store any information on its former location.
- `'xor'` — Draw and erase the object by performing an exclusive OR (XOR) with the color of the screen beneath it. This mode does not damage the color of the objects beneath it. However, the object color depends on the color of whatever is beneath it on the display.
- `'background'` — Erase the object by redrawing it in the axes background color, or the figure background color if the axes `Color` property is `'none'`. This damages objects that are behind the erased object, but properly colors the erased object.

MATLAB always prints figures as if the `EraseMode` property of all objects is set to `'normal'`. This means graphics objects created with `EraseMode` set to `'none'`, `'xor'`,

or `'background'` can look different on screen than on paper. On screen, MATLAB mathematically combines layers of colors and ignores three-dimensional sorting to obtain greater rendering speed. However, MATLAB does not apply these techniques to the printed output. Use the `getframe` command or other screen capture applications to create an image of a figure containing nonnormal mode objects.

Identifiers

`Type` — Type of graphics object

`'text'`

This property is read-only.

Type of graphics object, returned as `'text'`. Use this property to find all objects of a given type within a plotting hierarchy, for example, searching for the type using `findobj`.

`Tag` — Tag to associate with text

`''` (default) | character vector

User-specified tag to associate with the object, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the object

`[]` (default) | any MATLAB data

Data to associate with the object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Parent/Child

`Parent` — Parent

`Axes` object | `Group` object | `Transform` object

Parent, specified as an `Axes`, `Group`, or `Transform` object.

`Children` — Children

empty `GraphicsPlaceholder` array

The object has no children. You cannot set this property.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — Object handle is always visible.
- `'off'` — Object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — Object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

If the object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Interactive Control

`Editing` — Interactive edit mode

`'off'` (default) | `'on'`

Interactive edit mode, specified as one of these values:

- `'off'` — Do no allow interactive text editing. To change the text, you must set the `String` property. This is the default value.
- `'on'` — Allow interactive text editing. MATLAB places an insert cursor within the text and typing changes the text. To apply the new text, do any of the following:

- Press the **Esc** key.
- Click anywhere away from the text.
- Reset the `Editing` property to `'off'`.

MATLAB updates the `String` property to contain the new text and resets the `Editing` property to `'off'`.

`ButtonDownFcn` — Mouse-click callback

`''` (default) | function handle | cell array | character vector

Mouse-click callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you click the object. If you specify this property using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Clicked object — You can access properties of the clicked object from within the callback function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then this callback does not execute.

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`UIContextMenu` — Context menu

uicontextmenu object

Context menu, specified as a uicontextmenu object. Use this property to display a context menu when you right-click the object. Create the context menu using the `uicontextmenu` function.

Note: If the `PickableParts` property is set to `'none'` or if the `HitTest` property is set to `'off'`, then the context menu does not appear.

`Selected` — Selection state

`'off'` (default) | `'on'`

Selection state, specified as one of these values:

- `'on'` — Selected. If you click the object when in plot edit mode, then MATLAB sets its `Selected` property to `'on'`. If the `SelectionHighlight` property also is set to `'on'`, then MATLAB displays selection handles around the object.
- `'off'` — Not selected.

`SelectionHighlight` — Display of selection handles when selected

`'on'` (default) | `'off'`

Display of selection handles when selected, specified as one of these values:

- `'on'` — Display selection handles when the `Selected` property is set to `'on'`.
- `'off'` — Never display selection handles, even when the `Selected` property is set to `'on'`.

Callback Execution Control

`PickableParts` — Ability to capture mouse clicks

`'visible'` (default) | `'all'` | `'none'`

Ability to capture mouse clicks, specified as one of these values:

- `'visible'` — Can capture mouse clicks only when visible. The `Visible` property must be set to `'on'`. The `HitTest` property determines if the `Text` object responds to the click or if an ancestor does.
- `'all'` — Can capture mouse clicks regardless of visibility. The `Visible` property can be set to `'on'` or `'off'`. The `HitTest` property determines if the `Text` object responds to the click or if an ancestor does.

- `'none'` — Cannot capture mouse clicks. Clicking the `Text` object passes the click to the object below it in the current view of the figure window, which is typically the axes or the figure. The `HitTest` property has no effect.

If you want an object to be clickable when it is underneath other objects that you do not want to be clickable, then set the `PickableParts` property of the other objects to `'none'` so that the click passes through them.

`HitTest` — Response to captured mouse clicks

`'on'` (default) | `'off'`

Response to captured mouse clicks, specified as one of these values:

- `'on'` — Trigger the `ButtonDownFcn` callback of the `Text` object. If you have defined the `UIContextMenu` property, then invoke the context menu.
- `'off'` — Trigger the callbacks for the nearest ancestor of the `Text` object that has a `HitTest` property set to `'on'` and a `PickableParts` property value that enables the ancestor to capture mouse clicks.

Note: The `PickableParts` property determines if the `Text` object can capture mouse clicks. If it cannot, then the `HitTest` property has no effect.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Text` object is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see "Interrupt Callback Execution".
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the `Text` object tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.

- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the object. Setting the `CreateFcn` property on an existing object has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during object creation. MATLAB executes the callback after creating the object and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Created object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle

- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the objectMATLAB executes the callback before destroying the object so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- Deleted object — You can access properties of the object from within the callback function. You also can access the object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

See Also

See Also

`text`

Topics

"Access Property Values"
"Graphics Object Properties"

textread

Read data from text file; write to multiple outputs

Note: `textread` is not recommended. Use `textscan` instead.

Syntax

```
[A,B,C,...] = textread(filename,format)
[A,B,C,...] = textread(filename,format,N)
[...] = textread(...,param,value,...)
```

Description

`[A,B,C,...] = textread(filename,format)` reads data from the file `filename` into the variables `A`, `B`, `C`, and so on, using the specified `format`, until the entire file is read. The `filename` and `format` inputs are specified as character vectors. `textread` is useful for reading text files with a known format. `textread` handles both fixed and free format files.

Note When reading large text files, reading from a specific point in a file, or reading file data into a cell array rather than multiple outputs, you might prefer to use the `textscan` function.

`textread` matches and converts groups of characters from the input. Each input field is defined as a group of non-white-space characters that extends to the next white-space or delimiter character, or to the maximum field width. Repeated delimiter characters are significant, while repeated white-space characters are treated as one.

The `format` input, specified as a character vector, determines the number and types of return arguments. The number of return arguments is the number of items indicated by the contents of `format`. `format` supports a subset of the conversion specifiers and

conventions of the C language `fscanf` routine. Values for `format` are listed in the table below. White-space characters in `format` are ignored.

format	Action	Output
Literals (ordinary characters)	Ignore the matching characters. For example, in a file that has `Dept` followed by a number (for department number), to skip the `Dept` and read only the number, use `'Dept'` in the character vector `format`.	None
`%d`	Read a signed integer value.	Double array
`%u`	Read an integer value.	Double array
`%f`	Read a floating-point value.	Double array
`%s`	Read a white-space or delimiter-separated text.	Cell array of character vectors
`%q`	Read double quoted text, ignoring the quotes.	Cell array of character vectors
`%c`	Read characters, including white space.	Character array
`%[...]`	Read the longest group of characters containing characters specified in the brackets.	Cell array of character vectors
`%[^...]`	Read the longest nonempty group of characters containing characters that are not specified in the brackets.	Cell array of character vectors
`%*...` `instead of %`	Ignore the matching characters specified by `*`.	No output
`%w...` `instead of %`	Read field width specified by `w`. The `%f` format supports `%w.pf`, where `w` is the field width and `p` is the precision.	

`[A,B,C,...] = textread(filename,format,N)` reads the data, reusing the format specified in the character vector `format`, `N` times, where `N` is an integer greater than zero. If `N` is smaller than zero, `textread` reads the entire file.

`[...] = textread(...,param,value,...)` customizes `textread` using `param/value` pairs, as listed in the table below.

param	value	Action
`bufsize`	Positive integer	Specifies the maximum length of the character vector, in bytes. Default is `4095`.
`commentstyle`	`matlab`	Ignores characters after `%`.

param	value	Action
`commentstyle`	`shell`	Ignores characters after `#`.
`commentstyle`	`c`	Ignores characters between `/*` and `*/`.
`commentstyle`	`c++`	Ignores characters after `//`.
`delimiter`	One or more characters	Act as delimiters between elements. Default is none.
`emptyvalue`	Scalar double	Value given to empty cells when reading delimited files. Default is 0.
`endofline`	Single character or `'\r\n'`	Character that denotes the end of a line. Default is determined from file
`expchars`	Exponent characters	Default is `eEdD`.
`headerlines`	Positive integer	Ignores the specified number of lines at the beginning of the file.
`whitespace`	Any from the list below: `' '` Space `\b` Backspace `\n` Newline `\r` Carriage return `\t` Horizontal tab	Treats vector of characters as white space. Default is `' \b\t'`.

Note When `textread` reads a consecutive series of `whitespace` values, it treats them as one white space. When it reads a consecutive series of `delimiter` values, it treats each as a separate delimiter.

Examples

Example 1 — Read All Fields in Free Format File Using %

The first line of `mydata.dat` is

```
Sally    Level1 12.34 45 Yes
```

Read the first line of the file as a free format file using the `%` format.

```
[names, types, x, y, answer] = textread('mydata.dat', ...
'%s %s %f %d %s', 1)
```

returns

```
names =
    'Sally'
types =
    'Level1'
x =
  12.34000000000000
y =
    45
answer =
    'Yes'
```

Example 2 — Read as Fixed Format File, Ignoring the Floating Point Value

The first line of `mydata.dat` is

```
Sally    Level1 12.34 45 Yes
```

Read the first line of the file as a fixed format file, ignoring the floating-point value.

```
[names, types, y, answer] = textread('mydata.dat', ...
'%9c %6s %*f %2d %3s', 1)
```

returns

```
names =
Sally
types =
    'Level1'
y =
    45
answer =
    'Yes'
```

`%*f` in `format` causes `textread` to ignore the floating point value, in this case, `12.34`.

Example 3 — Read Using Literal to Ignore Matching Characters

The first line of `mydata.dat` is

```
Sally    Type1 12.34 45 Yes
```

Read the first line of the file, ignoring the characters `Type` in the second field.

```
[names, typenum, x, y, answer] = textread('mydata.dat', ...
'%s Type%d %f %d %s', 1)
```

returns

```
names =
    'Sally'
typenum =
    1
x =
  12.34000000000000
y =
    45
answer =
    'Yes'
```

Specifying `Type%d` in `format` causes the characters `Type` in the second field to be ignored, while the rest of the second field is read as a signed integer, in this case, `1`.

Example 4 — Specify Value to Fill Empty Cells

For files with empty cells, use the `emptyvalue` parameter. Suppose the file `data.csv` contains:

```
1,2,3,4,,6
7,8,9,,11,12
```

Read the file using `NaN` to fill any empty cells:

```
data = textread('data.csv', '', 'delimiter', ',', ...
                'emptyvalue', NaN);
```

Example 5 — Read File into a Cell Array of Character Vectors

Read the file `fft.m` into a cell array of character vectors.

```
file = textread('fft.m', '%s', 'delimiter', '\n', ...
                'whitespace', '');
```

Tips

If you want to preserve leading and trailing spaces in the text, use the `whitespace` parameter as shown here:

```
textread('myfile.txt', '%s', 'whitespace', '')
ans =
    '   An  example      of preserving    spaces      '
```

See Also

`textscan` | `fscanf` | `dlmread`

Introduced before R2006a

textscan

Read formatted data from text file or string

Syntax

```
C = textscan(fileID,formatSpec)
C = textscan(fileID,formatSpec,N)

C = textscan(chr,formatSpec)
C = textscan(chr,formatSpec,N)

C = textscan( ___ ,Name,Value)

[C,position] = textscan( ___ )
```

Description

`C = textscan(fileID,formatSpec)` reads data from an open text file into a cell array, `C`. The text file is indicated by the file identifier, `fileID`. Use `fopen` to open the file and obtain the `fileID` value. When you finish reading from a file, close the file by calling `fclose(fileID)`.

`textscan` attempts to match the data in the file to the conversion specifier in `formatSpec`. The `textscan` function reapplies `formatSpec` throughout the entire file and stops when it cannot match `formatSpec` to the data.

`C = textscan(fileID,formatSpec,N)` reads file data using the `formatSpec` `N` times, where `N` is a positive integer. To read additional data from the file after `N` cycles, call `textscan` again using the original `fileID`. If you resume a text scan of a file by calling `textscan` with the same file identifier (`fileID`), then `textscan` automatically resumes reading at the point where it terminated the last read.

`C = textscan(chr,formatSpec)` reads the text from character vector `chr` into cell array `C`. When reading text from a character vector, repeated calls to `textscan` restart the scan from the beginning each time. To restart a scan from the last position, request a `position` output.

`textscan` attempts to match the data in character vector `chr` to the format specified in `formatSpec`.

`C = textscan(chr,formatSpec,N)` uses the `formatSpec` `N` times, where `N` is a positive integer.

`C = textscan( ___ ,Name,Value)` specifies options using one or more `Name,Value` pair arguments, in addition to any of the input arguments in the previous syntaxes.

`[C,position] = textscan( ___ )` returns the position in the file or the character vector at the end of the scan as the second output argument. For a file, this is the value that `ftell(fileID)` would return after calling `textscan`. For a character vector, `position` indicates how many characters `textscan` read.

Examples

Read Floating-Point Numbers

Read a character vector containing floating-point numbers.

```
chr = '0.41 8.24 3.57 6.24 9.27';
C = textscan(chr,'%f');
```

The specifier `'%f'` in `formatSpec` tells `textscan` to match each field in `chr` to a double-precision floating-point number.

Display the contents of cell array `C`.

```
celldisp(C)
```

```
C{1} =

    0.4100
    8.2400
    3.5700
    6.2400
    9.2700
```

Read the same character vector, and truncate each value to one decimal digit.

```
C = textscan(chr,'%3.1f %*1d');
```

The specifier `%3.1f` indicates a field width of 3 digits and a precision of 1. The `textscan` function reads a total of 3 digits, including the decimal point and the 1 digit after the decimal point. The specifier, `%*1d`, tells `textscan` to skip the remaining digit.

Display the contents of cell array `C`.

```
celldisp(C)
```

```
C{1} =

    0.4000
    8.2000
    3.5000
    6.2000
    9.2000
```

Read Different Types of Data

Load the data file and read each column with the appropriate type.

Load file `scan1.dat` and preview its contents in a text editor. A screen shot is shown below.

```
filename = fullfile(matlabroot,'examples','matlab','scan1.dat');
```

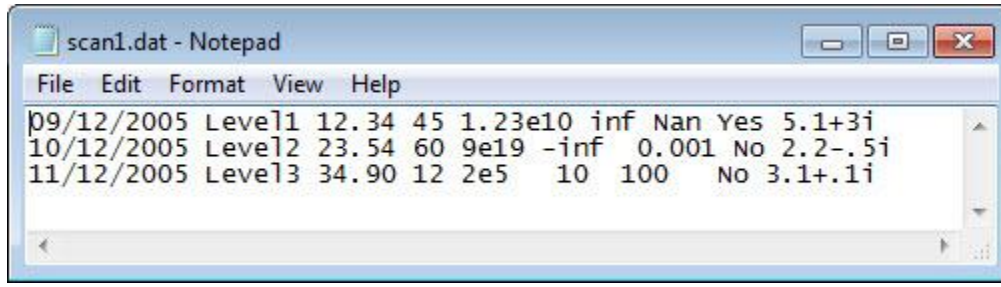

Open the file, and read each column with the appropriate conversion specifier. `textscan` returns a `1-by-9` cell array `C`.

```
fileID = fopen(filename);
C = textscan(fileID,'%s %s %f32 %d8 %u %f %f %s %f');
fclose(fileID);
```

```
whos C
```

```
  Name      Size            Bytes  Class    Attributes

  C         1x9              2249  cell
```

View the MATLAB® data type of each of the cells in `C`.

```
C
```

```
C = 1×9 cell array
    {3×1 cell}    {3×1 cell}    [3×1 single]    [3×1 int8]    [3×1 uint32]    [3×1 doub
```

Examine the individual entries. Notice that `C{1}` and `C{2}` are cell arrays. `C{5}` is of data type `uint32`, so the first two elements of `C{5}` are the maximum values for a `32`-bit unsigned integer, or `intmax('uint32')`.

```
celldisp(C)
```

```
C{1}{1} =

09/12/2005


C{1}{2} =

10/12/2005


C{1}{3} =

11/12/2005


C{2}{1} =

Level1


C{2}{2} =

Level2
```

```
C{2}{3} =

Level3


C{3} =

   12.3400
   23.5400
   34.9000



C{4} =

   45
   60
   12



C{5} =

   4294967295
   4294967295
       200000



C{6} =

   Inf
  -Inf
    10



C{7} =

       NaN
    0.0010
  100.0000
```

```
C{8}{1} =

Yes


C{8}{2} =

No


C{8}{3} =

No


C{9} =

   5.1000 + 3.0000i
   2.2000 - 0.5000i
   3.1000 + 0.1000i
```

Remove Literal Text

Remove the literal text `'Level'` from each field in the second column of the data from the previous example. A preview of the file is shown below.

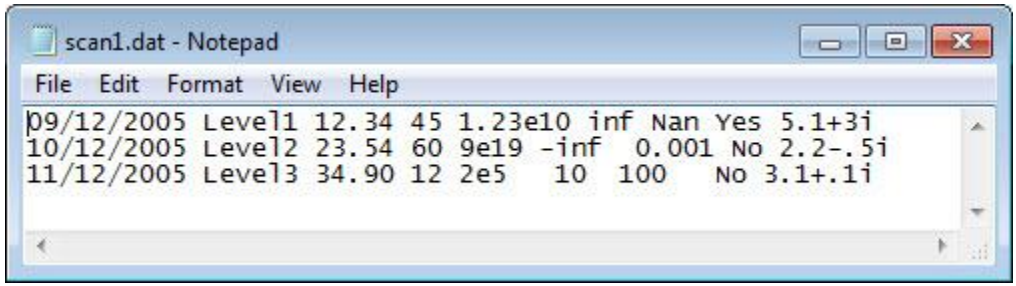

Open the file and Match the literal text in the formatSpec input.

```
filename = fullfile(matlabroot,'examples','matlab','scan1.dat');
```

```
fileID = fopen(filename);
C = textscan(fileID,'%s Level%d %f32 %d8 %u %f %f %s %f');
fclose(fileID);
C{2}
```

```
ans = 3×1 int32 column vector

   1
   2
   3
```

View the MATLAB® data type of the second cell in `C`. The second cell of the `1-by-9` cell array, `C`, is now of data type `int32`.

```
disp( class(C{2}) )
```

```
int32
```

Skip the Remainder of a Line

Read the first column of the file in the previous example into a cell array, skipping the rest of the line.

```
filename = fullfile(matlabroot,'examples','matlab','scan1.dat');
fileID = fopen(filename);
dates = textscan(fileID,'%s %*[^\n]');
fclose(fileID);
dates{1}
```

```
ans = 3×1 cell array
    '09/12/2005'
    '10/12/2005'
    '11/12/2005'
```

`textscan` returns a `1-by-1` cell array dates.

Specify Delimiter and Empty Value Conversion

Load the file `data.csv` and preview its contents in a text editor. A screen shot is shown below. Notice the file contains data sperated by commas and also contains empty values.

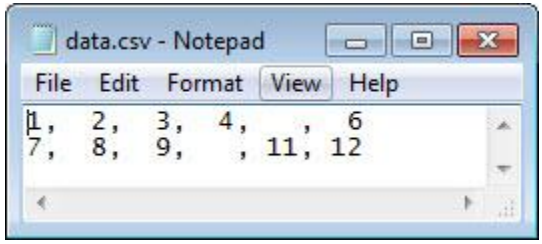

Read the file, converting empty cells to `-Inf`.

```
filename = fullfile(matlabroot,'examples','matlab','data.csv');
fileID = fopen(filename);
C = textscan(fileID,'%f %f %f %f %u8 %f',...
'Delimiter',',','EmptyValue',-Inf);
fclose(fileID);
column4 = C{4}, column5 = C{5}
```

```
column4 =

     4
  -Inf


column5 = 2×1 uint8 column vector

    0
   11
```

`textscan` returns a `1-by-6` cell array, `C`. The `textscan` function converts the empty value in `C{4}` to `-Inf`, where `C{4}` is associated with a floating-point format. Because MATLAB® represents unsigned integer `-Inf` as `0`, `textscan` converts the empty value in `C{5}` to `0`, and not `-Inf`.

Specify Text to be Treated as Empty or Comments

Load the file `data2.csv` and preview its contents in a text editor. A screen shot is shown below. Notice the file contains data that can be interpreted as comments and other entries such as `'NA'` or `'na'` that may indicate empty fields.

```
filename = fullfile(matlabroot,'examples','matlab','data2.csv');
```

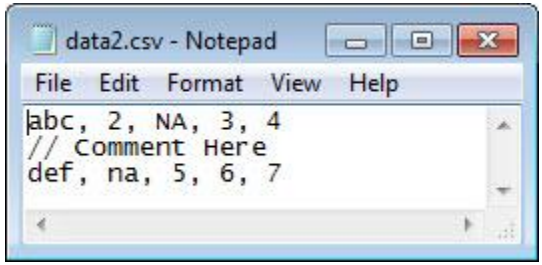

Designate the input that `textscan` should treat as comments or empty values and scan the data into `C`.

```
fileID = fopen(filename);
C = textscan(fileID,'%s %n %n %n %n','Delimiter',',',...
'TreatAsEmpty',{'NA','na'},'CommentStyle','//');
fclose(fileID);
```

Display the output.

```
celldisp(C)
```

```
C{1}{1} =

abc


C{1}{2} =

def


C{2} =

     2
   NaN



C{3} =

   NaN
     5
```

```
C{4} =

     3
     6


C{5} =

     4
     7
```

Treat Repeated Delimiters as One

Load the file `data3.csv` and preview its contents in a text editor. A screen shot is shown below. Notice the file contains repeated delimiters.

```
filename = fullfile(matlabroot,'examples','matlab','data3.csv');
```

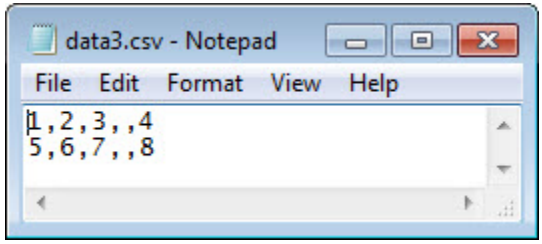

To treat the repeated commas as a single delimiter, use the `MultipleDelimsAsOne` parameter, and set the value to `1` (`true`).

```
fileID = fopen(filename);
C = textscan(fileID,'%f %f %f %f','Delimiter',',',...
'MultipleDelimsAsOne',1);
fclose(fileID);


celldisp(C)
```

```
C{1} =

     1
     5


C{2} =

     2
     6


C{3} =

     3
     7


C{4} =

     4
     8
```

Specify Repeated Conversion Specifiers and Collect Numeric Data

Load the data file `grades.txt` for this example and preview its contents in a text editor. A screen shot is shown below. Notice the file contains repeated delimiters.

```
filename = fullfile(matlabroot,'examples','matlab','grades.txt');
```

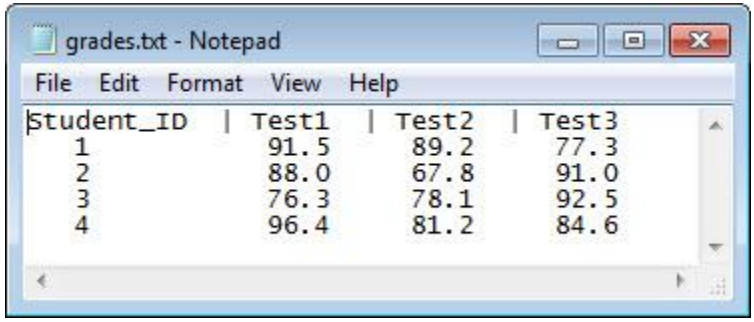

Read the column headers using the format `'%s'` four times.

```
fileID = fopen(filename);
formatSpec = '%s';
N = 4;
C_text = textscan(fileID,formatSpec,N,'Delimiter','|');
```

Read the numeric data in the file.

```
C_data0 = textscan(fileID,'%d %f %f %f')
```

```
C_data0 = 1×4 cell array
    [4×1 int32]    [4×1 double]    [4×1 double]    [4×1 double]
```

The default value for `CollectOutput` is `0` (`false`), so `textscan` returns each column of the numeric data in a separate array.

Set the file position indicator to the beginning of the file.

```
frewind(fileID);
```

Reread the file and set CollectOutput to 1 (true) to collect the consecutive columns of the same class into a single array. You can use the `repmat` function to indicate that the `%f` conversion specifier should appear three times. This technique is useful when a format repeats many times.

```
C_text = textscan(fileID,'%s',N,'Delimiter','|');
C_data1 = textscan(fileID,['%d',repmat('%f',[1,3])],'CollectOutput',1)
```

```
C_data1 = 1×2 cell array
    [4×1 int32]    [4×3 double]
```

The test scores, which are all double, are collected into a single 4-by-3 array.

Close the file.

```
fclose(fileID);
```

Read or Skip Quoted Text and Numeric Fields

Read the first and last columns of data from a text file. Skip a column of text and a column of integer data.

Load the file `names.txt` and preview its contents in a text editor. A screen shot is shown below. Notice that file contains two cloumns of quoted text, followed by a column of intergers, and finally a column of floating point numberes.

```
filename = fullfile(matlabroot,'examples','matlab','names.txt');
```

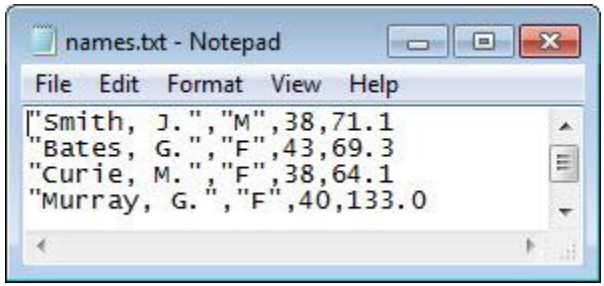

Read the first and last columns of data in the file. Use the conversion specifier, `%q` to read the text enclosed by double quotation marks (`"`). `%*q` skips the quoted text, `%*d` skips the integer field, and `%f` reads the floating-point number. Specify the comma delimiter using the `'Delimiter'` name-value pair argument.

```
fileID = fopen(filename,'r');
C = textscan(fileID,'%q %*q %*d %f','Delimiter',',');
fclose(fileID);
```

```
Display the output. |textscan| returns a |1-by-2| cell array, |C|.

Double quotation marks enclosing the text are removed.

celldisp(C)
```

```
C{1}{1} =

Smith, J.


C{1}{2} =

Bates, G.


C{1}{3} =

Curie, M.


C{1}{4} =

Murray, G.


C{1}{5} =

Brown, K.


C{2} =

   71.1000
   69.3000
   64.1000
  133.0000
   64.9000
```

Read Foreign-Language Dates

Load the file `german_dates.txt` and preview its contents in a text editor. A screen shot is shown below. Notice that the first column of values contains dates in German and the second and third columns are numeric values.

```
filename = fullfile(matlabroot,'examples','matlab','german_dates.txt');
```

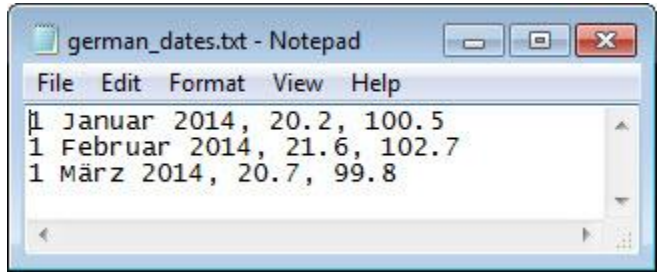

Open the file. Specify the character encoding scheme associated with the file as the last input to `fopen`.

```
fileID = fopen(filename,'r','n','ISO-8859-15');
```

Read the file. Specify the format of the dates in the file using the `%{dd % MMMM yyyy}D` specifier. Specify the locale of the dates using the `DateLocale` name-value pair argument.

```
C = textscan(fileID,'%{dd MMMM yyyy}D %f %f',...
    'DateLocale','de_DE','Delimiter',',');
fclose(fileID);
```

View the contents of the first cell in C. The dates display in the language MATLAB uses depending on your system locale.

```
C{1}
```

```
ans = 3×1 datetime array
   01 January 2014
   01 February 2014
   01 March 2014
```

Read Nondefault Control Characters

Use `sprintf` to convert nondefault escape sequences in your data.

Create text that includes a form feed character, `\f`. Then, to read the text using `textscan`, call `sprintf` to explicitly convert the form feed.

```
lyric = sprintf('Blackbird\fsinging\fin\fthe\fdead\fof\fnight');
```

```
C = textscan(lyric,'%s','delimiter',sprintf('\f'));
C{1}
```

```
ans = 7×1 cell array
    'Blackbird'
    'singing'
    'in'
    'the'
    'dead'
    'of'
    'night'
```

`textscan` returns a 1-by-1 cell array, `C`.

Resume Scanning

Resume scanning from a position other than the beginning.

If you resume a scan of the text, `textscan` reads from the beginning each time. To resume a scan from any other position, use the two-output argument syntax in your initial call to `textscan`.

For example, create a character vector called `lyric`. Read the first word of the character vector, and then resume the scan.

```
lyric = 'Blackbird singing in the dead of night';
[firstword,pos] = textscan(lyric,'%9c',1);
lastpart = textscan(lyric(pos+1:end),'%s');
```

- "Import Data from a Nonrectangular Text File"
- "Import Large Text File Data in Blocks"
- "Access Data in Cell Array"

Input Arguments

`fileID` — File identifier
numeric scalar

File identifier of an open text file, specified as a number. Before reading a file with `textscan`, you must use `fopen` to open the file and obtain the `fileID`.

Data Types: `double`

`formatSpec` — Format of the data fields

character vector | string

Format of the data fields, specified as a character vector or a string of one or more conversion specifiers. When `textscan` reads the input, it attempts to match the data to the format specified in `formatSpec`. If `textscan` fails to match a data field, it stops reading and returns all fields read before the failure.

The number of conversion specifiers determines the number of cells in output array, `C`.

Numeric Fields

This table lists available conversion specifiers for numeric inputs.

Numeric Input Type	Conversion Specifier	Output Class
Integer, signed	`%d`	`int32`
	`%d8`	`int8`
	`%d16`	`int16`
	`%d32`	`int32`
	`%d64`	`int64`
Integer, unsigned	`%u`	`uint32`
	`%u8`	`uint8`
	`%u16`	`uint16`
	`%u32`	`uint32`
	`%u64`	`uint64`
Floating-point number	`%f`	`double`
	`%f32`	`single`
	`%f64`	`double`
	`%n`	`double`

Nonnumeric Fields

This table lists available conversion specifiers for inputs that include nonnumeric characters.

Nonnumeric Input Type	Conversion Specifier	Details
Character	`%c`	Read any single character, including a delimiter.
Text Array	`%s`	Read as a cell array of character vectors.
	`%q`	Read as a cell array of character vectors. If the text begins with a double quotation mark (`"`), omit the leading quotation mark and its accompanying closing mark, which is the second instance of a lone double quotation mark. Replace escaped double quotation marks (for example, `""abc""`) with lone double quotation marks (`"abc"`). `%q` ignores any double quotation marks that appear after the closing double quotation mark. Example: `'%q'` reads `'"Joe ""Lightning"" Smith, Jr."'` as `'Joe "Lightning" Smith, Jr.'`.
Dates and time	`%D`	Read the same way as `%q` above, and then convert to a datetime value.
	`%{fmt}D`	Read the same way as `%q` above, and then convert it to a datetime value. *`fmt`* describes the format of the input text. The *`fmt`* input is a character vector of letter identifiers that is a valid value for the `Format` property of a datetime. `textscan` converts text that does not match this format to `NaT` values. For more information about datetime display formats, see the Format property for datetime arrays. Example: `'%{dd-MMM-yyyy}D'` specifies the format of a date such as `'01-Jan-2014'` .

Nonnumeric Input Type	Conversion Specifier	Details
Category	`%C`	Read the same way as `%q`, and then convert to a category name in a categorical array. `textscan` converts `<undefined>` text to an undefined value in the output categorical array.
Pattern-matching	`%[...]`	Read as a cell array of character vectors, the characters inside the brackets up to the first nonmatching character. To include `]` in the set, specify it first: `%[]...]`. Example: `%[mus]` reads `'summer '` as `'summ'`.
	`%[^...]`	Exclude characters inside the brackets, reading until the first matching character. To exclude `]`, specify it first: `%[^]...]`. Example: `%[^xrg]` reads `'summer '` as `'summe'`.

Optional Operators

Conversion specifiers in `formatSpec` can include optional operators, which appear in the following order (includes spaces for clarity):

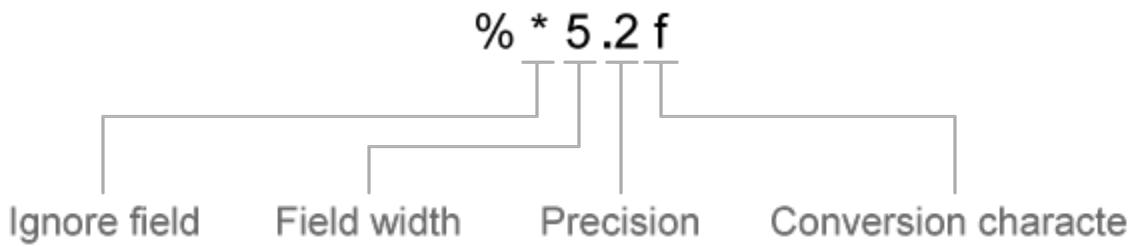

Optional operators include:

- Fields and Characters to Ignore

  `textscan` reads all characters in your file in sequence, unless you tell it to ignore a particular field or a portion of a field.

Insert an asterisk character (*) after the percent character (%) to skip a field or a portion of a character field.

Operator	Action Taken
`%*k`	Skip the field. *k* is any conversion specifier identifying the field to skip. `textscan` does not create an output cell for any such fields. Example: `'%s %*s %s %s %*s %*s %s'` (spaces are optional) converts the text `'Blackbird singing in the dead of night'` into four output cells with `'Blackbird' 'in' 'the' 'night'`
`'%*ns'`	Skip up to *n* characters, where *n* is an integer less than or equal to the number of characters in the field. Example: `'%*3s %s'` converts `'abcdefg'` to `'defg'`. When the delimiter is a comma, the same delimiter converts `'abcde,fghijkl'` to a cell array containing `'de';'ijkl'`.
`'%*nc'`	Skip *n* characters, including delimiter characters.

- Field Width

  `textscan` reads the number of characters or digits specified by the field width or precision, or up to the first delimiter, whichever comes first. A decimal point, sign (`+` or `-`), exponent character, and digits in the numeric exponent are counted as characters and digits within the field width. For complex numbers, the field width refers to the individual widths of the real part and the imaginary part. For the imaginary part, the field width includes + or − but not `i` or `j`. Specify the field width by inserting a number after the percent character (%) in the conversion specifier.

  Example: `%5f` reads `'123.456'` as `123.4`.

  Example: `%5c` reads `'abcdefg'` as `'abcde'`.

  When the field width operator is used with single characters (`%c`), `textscan` also reads delimiter, white-space, and end-of-line characters.
  Example: `%7c` reads 7 characters, including white-space, so `'Day and night'` reads as `'Day and'`.

- Precision

For floating-point numbers (`%n`, `%f`, `%f32`, `%f64`), you can specify the number of decimal digits to read.

Example: `%7.2f` reads `'123.456'` as `123.45`.

- Literal Text to Ignore

  `textscan` ignores the text appended to the `formatSpec` conversion specifier.

  Example: `Level%u8` reads `'Level1'` as `1`.

  Example: `%u8Step` reads `'2Step'` as `2`.

Data Types: `char` | `string`

`N` — Number of times to apply `formatSpec`

`Inf` (default) | positive integer

Number of times to apply `formatSpec`, specified as a positive integer.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`chr` — Input text

character vector | string

Input text to read.

Data Types: `char` | `string`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Names are not case sensitive.

Example: `C = textscan(fileID,formatSpec,'HeaderLines',3,'Delimiter',',')` skips the first three lines of the data, and then reads the remaining data, treating commas as a delimiter.

'CollectOutput' — Logical indicator determining data concatenation

false (default) | true

Logical indicator determining data concatenation, specified as the comma-separated pair consisting of 'CollectOutput' and either true or false. If true, then the importing function concatenates consecutive output cells of the same fundamental MATLAB class into a single array.

'CommentStyle' — Symbols designating text to ignore

character vector | cell array of character vectors | string | string array

Symbols designating text to ignore, specified as the comma-separated pair consisting of 'CommentStyle' and a character vector, cell array of character vectors, string, or string array.

For example, specify a character such as '%' to ignore text following the symbol on the same line. Specify a cell array of two character vectors, such as {'/*', '*/'}, to ignore any text between those sequences.

MATLAB checks for comments only at the start of each field, not within a field.

Example: 'CommentStyle',{'/*', '*/'}

Example: 'CommentStyle',["/*", "*/"}

Data Types: char | string

'DateLocale' — Locale for reading dates

character vector | string

Locale for reading dates, specified as the comma-separated pair consisting of 'DateLocale' and a character vector in the form *xx_YY*, where *xx* is a lowercase ISO 639-1 two-letter code that specifies a language, and *YY* is an uppercase ISO 3166-1 alpha-2 code that specifies a country. For a list of common values for the locale, see the Locale name-value pair argument for the datetime function.

Use DateLocale to specify the locale in which textscan should interpret month and day of week names and abbreviations when reading text as dates using the %D format specifier.

Example: 'DateLocale','ja_JP'

'Delimiter' — Field delimiter characters

character vector | cell array of character vectors | string | string array

Field delimiter characters, specified as the comma-separated pair consisting of `'Delimiter'` and a character vector or a cell array of character vectors. Specify multiple delimiters in a cell array of character vectors.

Example: `'Delimiter',{';','*'}`

`textscan` interprets repeated delimiter characters as separate delimiters, and returns an empty value to the output cell.

Within each row of data, the default field delimiter is white-space. White-space can be any combination of space (`' '`), backspace (`'\b'`), or tab (`'\t'`) characters. If you do not specify a delimiter, then:

- the delimiter characters are the same as the white-space characters. The default white-space characters are `' '`, `'\b'`, and `'\t'`. Use the `'Whitespace'` name-value pair argument to specify alternate white-space characters.
- `textscan` interprets repeated white-space characters as a single delimiter.

When you specify one of the following escape sequences as a delimiter, `textscan` converts that sequence to the corresponding control character:

`\b`	Backspace
`\n`	Newline
`\r`	Carriage return
`\t`	Tab
`\\`	Backslash (\)

Data Types: `char` | `string`

`'EmptyValue'` — Returned value for empty numeric fields

`NaN` (default) | scalar

Returned value for empty numeric fields in delimited text files, specified as the comma-separated pair consisting of `'EmptyValue'` and a scalar.

`'EndOfLine'` — End-of-line characters

character vector | string

End-of-line characters, specified as the comma-separated pair consisting of `'EndOfLine'` and a character vector or string. The character vector must be `'\r\n'` or it must specify a single character. Common end-of-line characters are a newline

character (`'\n'`) or a carriage return (`'\r'`). If you specify `'\r\n'`, then the importing function treats any of `\r`, `\n`, and the combination of the two (`\r\n`) as end-of-line characters.

The default end-of-line sequence is `\n`, `\r`, or `\r\n`, depending on the contents of your file.

If there are missing values and an end-of-line sequence at the end of the last line in a file, then the importing function returns empty values for those fields. This ensures that individual cells in output cell array, `C`, are the same size.

Example: `'EndOfLine',':'`

Example: `"EndOfLine",":"`

Data Types: `char` | `string`

`'ExpChars'` — Exponent characters
`'eEdD'` (default) | character vector | string

Exponent characters, specified as the comma-separated pair consisting of `'ExpChars'` and a character vector or string. The default exponent characters are `e`, `E`, `d`, and `D`.

Data Types: `char` | `string`

`'HeaderLines'` — Number of header lines
`0` (default) | positive integer

Number of header lines, specified as the comma-separated pair consisting of `'HeaderLines'` and a positive integer. `textscan` skips the header lines, including the remainder of the current line.

`'MultipleDelimsAsOne'` — Multiple delimiter handling
`0 (false)` (default) | `1 (true)`

Multiple delimiter handling, specified as the comma-separated pair consisting of `'MultipleDelimsAsOne'` and either `true` or `false`. If `true`, then the importing function treats consecutive delimiters as a single delimiter. Repeated delimiters separated by white-space are also treated as a single delimiter. You must also specify the `Delimiter` option.

Example: `'MultipleDelimsAsOne',1`

`'ReturnOnError'` — Behavior when `textscan` fails to read or convert
`1 (true)` (default) | `0 (false)`

Behavior when `textscan` fails to read or convert, specified as the comma-separated pair consisting of `'ReturnOnError'` and either `true` or `false`. If `true`, `textscan` terminates without an error and returns all fields read. If `false`, `textscan` terminates with an error and does not return an output cell array.

`'TreatAsEmpty'` — Placeholder text to treat as empty value

character vector | cell array of character vectors | string | string array

Placeholder text to treat as empty value, specified as the comma-separated pair consisting of `'TreatAsEmpty'` and a character vector, cell array of character vectors, string, or string array. This option only applies to numeric fields.

Data Types: `char` | `string`

`'Whitespace'` — White-space characters

`' \b\t'` (default) | character vector | string

White-space characters, specified as the comma-separated pair consisting of `'Whitespace'` and a character vector or string containing one or more characters. `textscan` adds a space character, `char(32)`, to any specified `Whitespace`, unless `Whitespace` is empty (`''`) and `formatSpec` includes any conversion specifier.

When you specify one of the following escape sequences as any white-space character, `textscan` converts that sequence to the corresponding control character:

`\b`	Backspace
`\n`	Newline
`\r`	Carriage return
`\t`	Tab
`\\`	Backslash (\)

Data Types: `char` | `string`

`'TextType'` — Output data type of text

`'char'` (default) | `'string'`

Output data type of text, specified as the comma-separated pair consisting of `'TextType'` and either `'char'` or `'string'`. If you specify the value `'char'`, then `textscan` returns text as a cell array of character vectors. If you specify the value `'string'`, then `textscan` returns text as an array of type `string`.

Output Arguments

C — File or text data

cell array

File or text data, returned as a cell array.

For each numeric conversion specifier in `formatSpec`, the `textscan` function returns a `K`-by-1 MATLAB numeric vector to the output cell array, `C`, where `K` is the number of times that `textscan` finds a field matching the specifier.

For each text conversion specifier (`%s`, `%q`, or `%[...]`) in `formatSpec`, the `textscan` function returns a `K`-by-1 cell array of character vectors, where `K` is the number of times that `textscan` finds a field matching the specifier. For each character conversion that includes a field width operator, `textscan` returns a `K`-by-`M` character array, where `M` is the field width.

For each datetime or categorical conversion specifier in `formatSpec`, the `textscan` function returns a `K`-by-1 datetime or categorical vector to the output cell array, `C`, where `K` is the number of times that `textscan` finds a field matching the specifier.

position — Position in the file or character vector

integer

Position at the end of the scan, in the file or the character vector, returned as an integer of class `double`. For a file, `ftell(fileID)` would return the same value after calling `textscan`. For a character vector, `position` indicates how many characters `textscan` read.

Algorithms

`textscan` converts numeric fields to the specified output type according to MATLAB rules regarding overflow, truncation, and the use of `NaN`, `Inf`, and `-Inf`. For example, MATLAB represents an integer `NaN` as zero. If `textscan` finds an empty field associated with an integer format specifier (such as `%d` or `%u`), it returns the empty value as zero and not `NaN`.

When matching data to a text conversion specifier, `textscan` reads until it finds a delimiter or an end-of-line character. When matching data to a numeric conversion specifier, `textscan` reads until it finds a nonnumeric character. When `textscan` can no

longer match the data to a particular conversion specifier, it attempts to match the data to the next conversion specifier in the `formatSpec`. Sign (`+` or `-`), exponent characters, and decimal points are considered numeric characters.

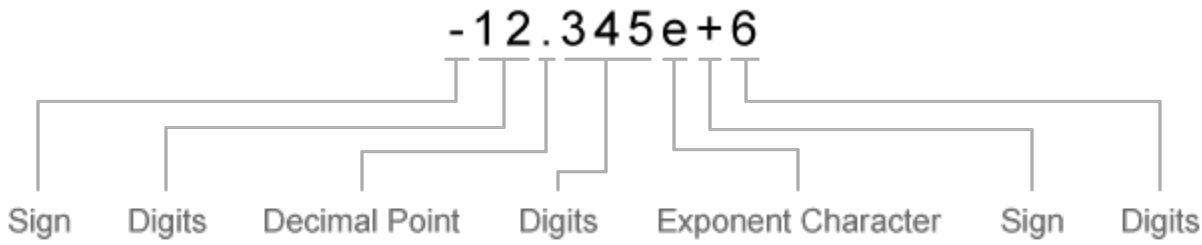

Sign	Digits	Decimal Point	Digits	Exponent Character	Sign	Digits
Read one sign character if it exists.	Read one or more digits.	Read one decimal point if it exists.	If there is a decimal point, read one or more digits that immediately follow it.	Read one exponent character if it exists.	If there is an exponent character, read one sign character.	If there is an exponent character, read one or more digits that follow it.

`textscan` imports any complex number as a whole into a complex numeric field, converting the real and imaginary parts to the specified numeric type (such as `%d` or `%f`). Valid forms for a complex number are:

`±<real>±<imag>i|j`	Example: `5.7-3.1i`
`±<imag>i|j`	Example: `-7j`

Do not include embedded white space in a complex number. `textscan` interprets embedded white space as a field delimiter.

See Also

See Also

`dlmread` | `fopen` | `fread` | `fscanf` | `load` | `readtable` | `uiimport` | `xlsread`

Topics

"Import Data from a Nonrectangular Text File"
"Import Large Text File Data in Blocks"
"Access Data in Cell Array"
"Ways to Import Text Files"

Introduced before R2006a

textwrap

Wrap text for uicontrol

Syntax

```
outstring = textwrap(h,instring)
outstring = textwrap(h,instring,columns)
outstring = textwrap(instring,columns)
[outstring,position] = textwrap(...)
```

Description

`outstring = textwrap(h,instring)` returns a wrapped cell array of character vectors that fits inside the `UIControl` specified by `h`. The `instring` argument is a cell array of character vectors in which each cell contains a single line of text. `outstring` is the wrapped cell array of character vectors. Each cell of `instring` is considered a paragraph.

`outstring = textwrap(h,instring,columns)` returns `outstring` with each line wrapped at the number of columns specified by the `columns` argument. Spaces are included in the character count.

`outstring = textwrap(instring,columns)` returns a wrapped cell array of character vectors for a specific `instring` and number of columns.

`[outstring,position] = textwrap(...)` returns the recommended position of the `UIControl` in the units of the `UIControl`. The `position` output argument considers the extent of the multiline text in the *x* and *y* directions.

`textwrap` maintains the original line breaks in the input cell array and adds new ones. It can calculate `UIControl` positions with any type of `Units`, including normalized units.

Examples

Place wrapped text in two `UIControl` text boxes. The position of the left text box is calculated by `textwrap` in pixel units. The position of the right text box is calculated in character units.

```
figure('Position',[560 528 350 250]);
% Make a text uicontrol to wrap in Units of Pixels
% Create it in Units of Pixels, 100 wide, 10 high
pos = [10 100 100 10];
ht = uicontrol('Style','Text','Position',pos);
txt = {'This is the left text box.',...
          'This text is wrapped in pixel units',...
          'with a position determined by TEXTWRAP.'};
% Wrap text, also returning a new position for ht
[outstring,newpos] = textwrap(ht,txt);

set(ht,'String',outstring,'Position',newpos)

% Make another text uicontrol to wrap to a column width of 20
colwidth = 20;
% Create it in Units of Pixels, 100 wide, 10 high
pos1 = [150 100 100 10];
ht1 = uicontrol('Style','Text','Position',pos1);
txt1 = {'This is the right text box.',...
          'This text wrapped in character units',...
          'using a column width of 20.'};
outstring1 = textwrap(ht1,txt1,colwidth);
% Reset Units of ht1 to Characters to use the result
set(ht1,'Units','characters')
newpos1 = get(ht1,'Position')

% Set new Position in Characters to be specified colwidth
% with height the length of the outstring1 cell array + 1.
newpos1(3) = colwidth;
newpos1(4) = length(outstring1)+1

set(ht1,'String',outstring1,'Position',newpos1)
```

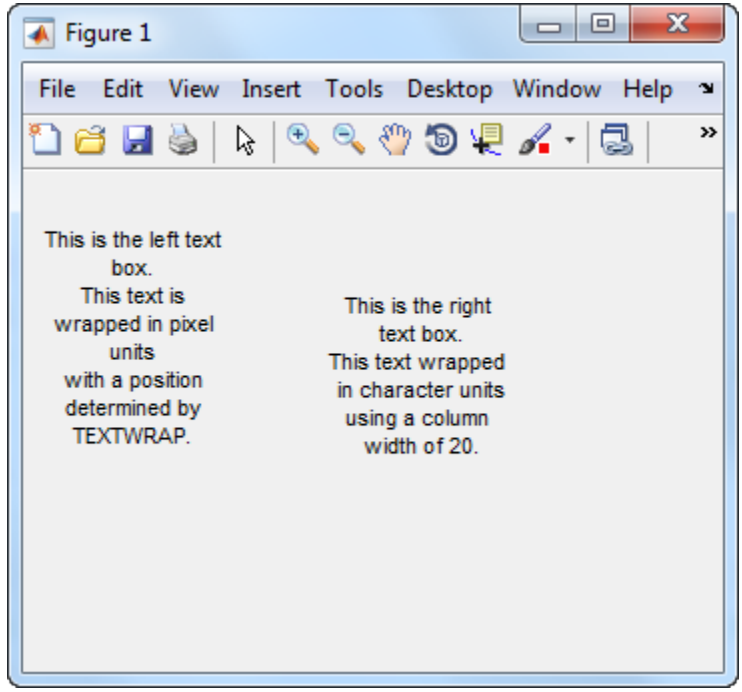

Tips

Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the `UIControl` object fires the `CreateFcn` callback repeatedly, which raises a series of error messages.

See Also

`align` | `uicontrol`

Introduced before R2006a

tfqmr

Transpose-free quasi-minimal residual method

Syntax

```
x = tfqmr(A,b)
x = tfqmr(afun,b)
x = tfqmr(a,b,tol)
x = tfqmr(a,b,tol,maxit)
x = tfqmr(a,b,tol,maxit,m)
x = tfqmr(a,b,tol,maxit,m1,m2,x0)
[x,flag] = tfqmr(A,B,...)
[x,flag,relres] = tfqmr(A,b,...)
[x,flag,relres,y]y(A,b,...)
[x,flag,relres,iter,resvec] = tfqmr(A,b,...)
```

Description

`x = tfqmr(A,b)` attempts to solve the system of linear equations `A*x=b` for `x`. The `n`-by-`n` coefficient matrix `A` must be square and the right-hand side column vector `b` must have length `n`.

`x = tfqmr(afun,b)` accepts a function handle, `afun`, instead of the matrix `A`. The function, `afun(x)`, accepts a vector input `x` and returns the matrix-vector product `A*x`. In all of the following syntaxes, you can replace `A` by `afun`. "Parameterizing Functions" explains how to provide additional parameters to the function `afun`.

`x = tfqmr(a,b,tol)` specifies the tolerance of the method. If `tol` is `[]` then `tfqmr` uses the default, 1e-6.

`x = tfqmr(a,b,tol,maxit)` specifies the maximum number of iterations. If `maxit` is `[]` then `tfqmr` uses the default, `min(N,20)`.

`x = tfqmr(a,b,tol,maxit,m)` and `x = tfqmr(a,b,tol,maxit,m1,m2)` use preconditioners `m` or `m=m1*m2` and effectively solve the system `A*inv(M)*x = B` for `x`. If

M is [ ] then a preconditioner is not applied. M may be a function handle mfun such that mfun(x) returns m\x.

x = tfqmr(a,b,tol,maxit,m1,m2,x0) specifies the initial guess. If x0 is [ ] then tfqmr uses the default, an all zero vector.

[x,flag] = tfqmr(A,B,...) also returns a convergence flag:

Flag	Convergence
0	tfqmr converged to the desired tolerance tol within maxit iterations.
1	tfqmr iterated maxit times but did not converge.
2	Preconditioner m was ill-conditioned.
3	tfqmr stagnated. (Two consecutive iterates were the same.)
4	One of the scalar quantities calculated during tfqmr became too small or too large to continue computing.

[x,flag,relres] = tfqmr(A,b,...) also returns the relative residual norm(b-A*x)/norm(b). If flag is 0, then relres <= tol.

[x,flag,relres,y]y(A,b,...) also returns the iteration number at which x was computed: 0 <= iter <= maxit.

[x,flag,relres,iter,resvec] = tfqmr(A,b,...) also returns a vector of the residual norms at each iteration, including norm(b-A*x0).

Examples

Using tfqmr with Matrix or Function Handle Input

This example shows how to use tfqmr with a matrix input and with a function input.

```
n = 100; on = ones(n,1);
A = spdiags([-2*on 4*on -on],-1:1,n,n);
b = sum(A,2);
tol = 1e-8;
maxit = 15;
```

```
M1 = spdiags([on/(-2) on],-1:0,n,n);
M2 = spdiags([4*on -on],0:1,n,n);
x = tfqmr(A,b,tol,maxit,M1,M2,[]);
```

You can also use a matrix-vector product function as input:

```
function y = afun(x,n)
y = 4 * x;
y(2:n) = y(2:n) - 2 * x(1:n-1);
y(1:n-1) = y(1:n-1) - x(2:n);
x1 = tfqmr(@(x)afun(x,n),b,tol,maxit,M1,M2);
```

If `applyOp` is a function suitable for use with `qmr`, it may be used with `tfqmr` by wrapping it in an anonymous function:

```
x1 = tfqmr(@(x)applyOp(x,'notransp'),b,tol,maxit,M1,M2);
```

Using tfqmr with a Preconditioner

This example demonstrates the use of a preconditioner.

Load `A = west0479`, a real 479-by-479 nonsymmetric sparse matrix.

```
load west0479;
A = west0479;
```

Define `b` so that the true solution is a vector of all ones.

```
b = full(sum(A,2));
```

Set the tolerance and maximum number of iterations.

```
tol = 1e-12;
maxit = 20;
```

Use `tfqmr` to find a solution at the requested tolerance and number of iterations.

```
[x0,fl0,rr0,it0,rv0] = tfqmr(A,b,tol,maxit);
```

`fl0` is 1 because `tfqmr` does not converge to the requested tolerance `1e-12` within the requested 20 iterations. The seventeenth iterate is the best approximate solution and is the one returned as indicated by `it0 = 17`. MATLAB® stores the residual history in `rv0`.

Plot the behavior of `tfqmr`.

```
semilogy(0:maxit,rv0(1:maxit+1)/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

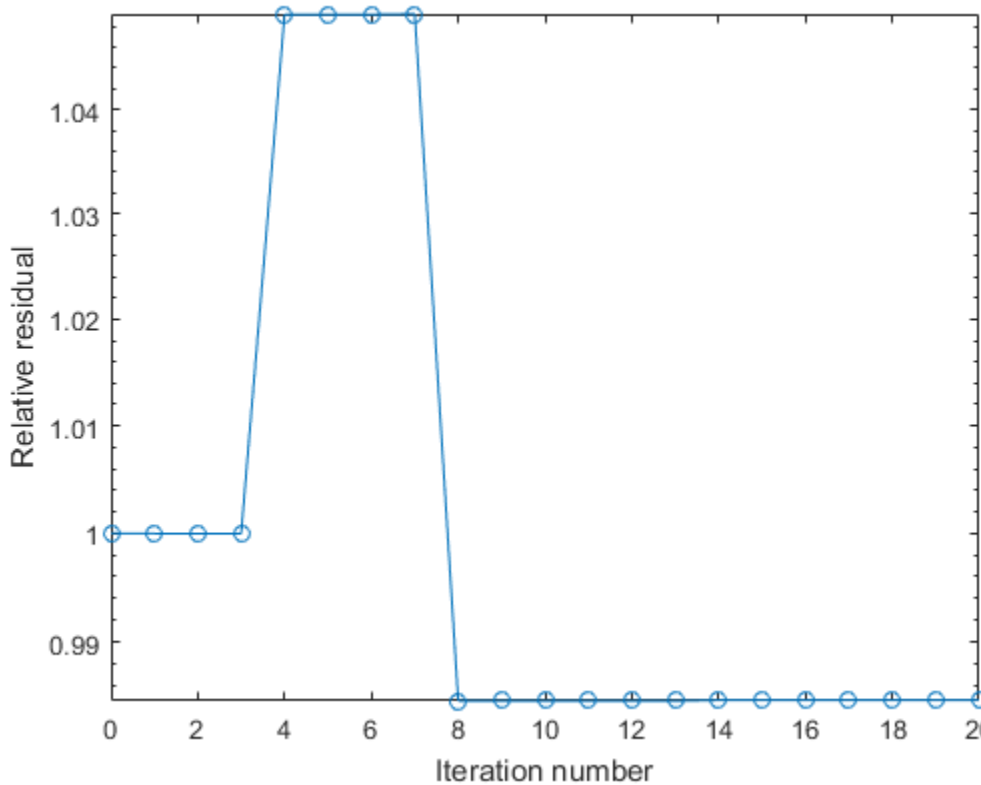

Note that like `bicgstab`, `tfqmr` keeps track of half iterations. The plot shows that the solution does not converge. You can use a preconditioner to improve the outcome.

Create the preconditioner with `ilu`, since the matrix `A` is nonsymmetric.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-5));
```

```
Error using ilu
```

```
There is a pivot equal to zero. Consider decreasing
the drop tolerance or consider using the 'udiag' option.
```

MATLAB cannot construct the incomplete LU as it would result in a singular factor, which is useless as a preconditioner.

You can try again with a reduced drop tolerance, as indicated by the error message.

```
[L,U] = ilu(A,struct('type','ilutp','droptol',1e-6));
[x1,fl1,rr1,it1,rv1] = tfqmr(A,b,tol,maxit,L,U);
```

`fl1` is 0 because `tfqmr` drives the relative residual to `4.1410e-014` (the value of `rr1`). The relative residual is less than the prescribed tolerance of `1e-12` at the sixth iteration (the value of `it1`) when preconditioned by the incomplete LU factorization with a drop tolerance of `1e-6`. The output `rv1(1)` is `norm(b)`, and the output `rv1(7)` is `norm(b-A*x2)`.

You can follow the progress of `tfqmr` by plotting the relative residuals at each iteration starting from the initial estimate (iterate number 0).

```
semilogy(0:0.5:it1,rv1/norm(b),'-o');
xlabel('Iteration number');
ylabel('Relative residual');
```

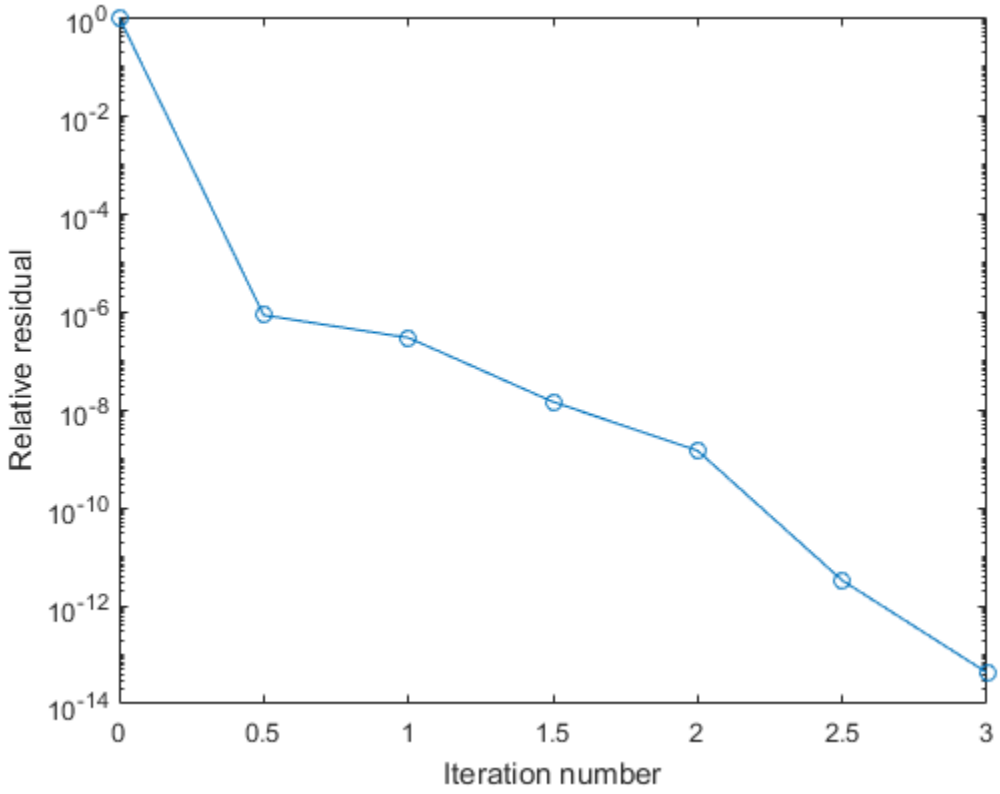

See Also

See Also

`bicg` | `bicgstab` | `bicgstabl` | `cgs` | `gmres` | `ilu` | `lsqr` | `minres` | `mldivide` | `pcg` | `qmr` | `symmlq`

Topics

"Create Function Handle"

thetalim

Set or query theta-axis limits for polar axes

Syntax

```
thetalim(limits)

thetalim('auto')
thetalim('manual')

tl = thetalim
m = thetalim('mode')

___ = thetalim(pax, ___ )
```

Description

`thetalim(limits)` specifies the theta-axis limits for the current polar axes. Specify `limits` as a two-element vector of the form `[thetamin thetamax]`, where `thetamax` is a numeric value greater than `thetamin`.

`thetalim('auto')` lets MATLAB choose the theta-axis limits. This command sets the `ThetaLimMode` property for the polar axes object to `'auto'`.

`thetalim('manual')` prevents the limits from changing automatically. This command sets the `ThetaLimMode` property for the polar axes object to `'manual'`.

`tl = thetalim` returns a two-element vector containing the limits for the current polar axes.

`m = thetalim('mode')` returns the current value of the limits mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify limits or set the mode to manual.

`___ = thetalim(pax, ___ )` uses the polar axes object specified by `pax` instead of the current polar axes. Specify `pax` as the first input argument. Include additional input or output arguments only if the original syntax supported them.

Examples

Specify theta-Axis Limits

Create a polar plot and change the theta-axis limits.

```
theta = linspace(0,pi);
rho = theta/10;
polarplot(theta,rho)
thetalim([0 180])
```

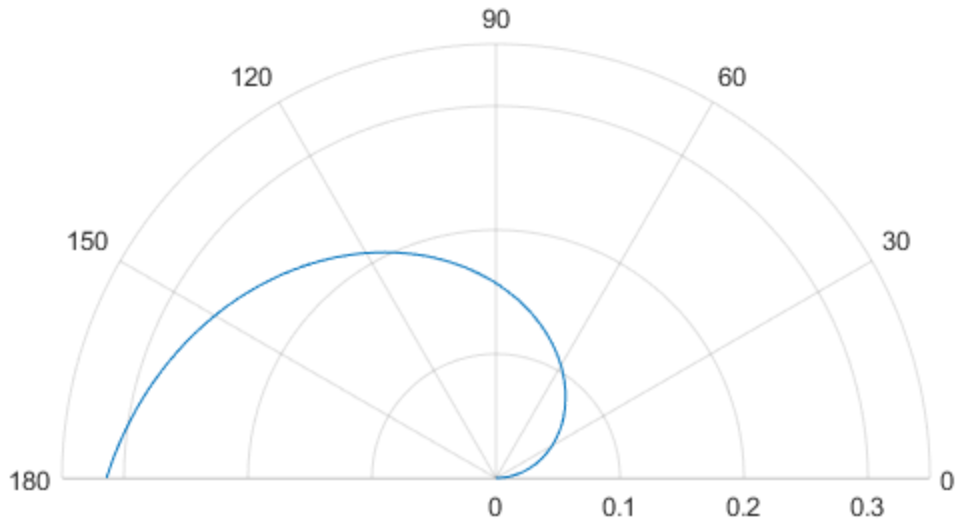

Set the limits back to the original values.

```
thetalim('auto')
```

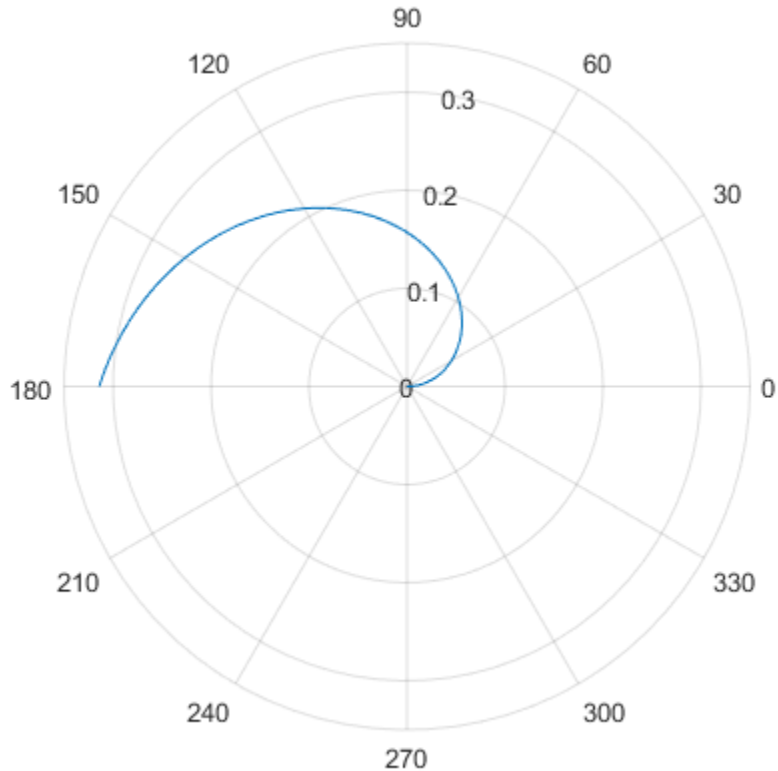

Specify theta-Axis Limits for Specific Polar Axes

Set the limits for a specific polar axes by specifying the polar axes object as the first input to `thetalim`. Otherwise, `thetalim` sets the limits for the current axes.

```
pax = polaraxes;
thetalim(pax,[0 180])
```

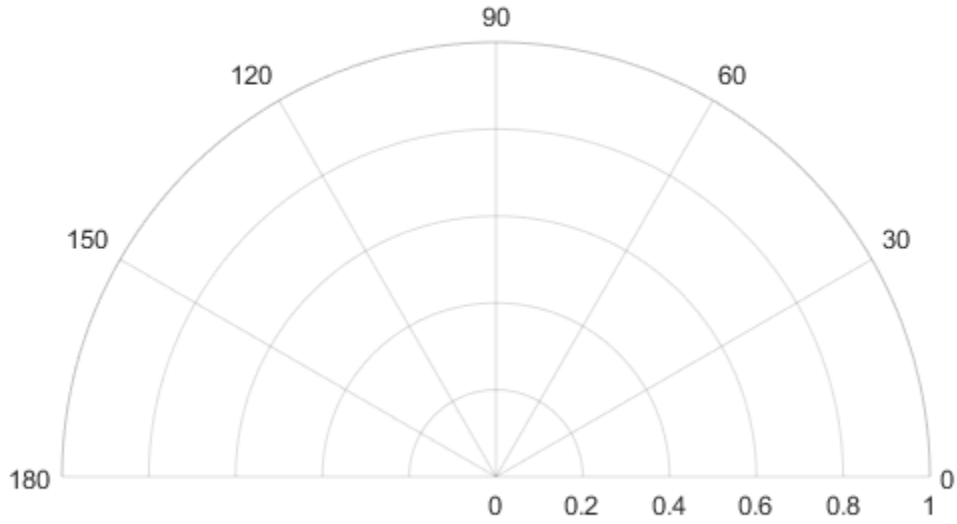

Input Arguments

`limits` — Minimum and maximum limits

two-element vector

Minimum and maximum limits, specified as a two-element vector of the form `[thetamin thetamax]`. When you specify the limits, the ThetaLim property for the polar axes object updates to the specified values.

Example: `[0 1]`

`pax` — Polar axes object
polar axes object

Polar axes object. If you do not specify a polar axes object, then `thetalim` sets the limits for the current polar axes.

Output Arguments

`tl` — Current limits
two-element vector

Current limits, returned as a two-element vector of the form `[thetamin thetamax]`. Querying the limits returns the value of the ThetaLim property for the polar axes object.

`m` — Current limits mode
`'auto'` | `'manual'`

Current limits mode, returned as one of these values:

- `'auto'` — Limits automatically update to reflect changes in the data.
- `'manual'` — Limits do not automatically update.

Querying the theta-axis limits mode returns the value of the ThetaLimMode property for the polar axes object.

See Also

See Also

Functions
`deg2rad` | `polarplot` | `rad2deg` | `rlim` | `title`

Properties
PolarAxes Properties

Introduced in R2016a

thetatickformat

Specify *theta*-axis tick label format

Syntax

```
thetatickformat(fmt)
thetatickformat(pax, ___ )

tfmt = thetatickformat
tfmt = thetatickformat(pax)
```

Description

`thetatickformat(fmt)` sets the format for the *theta*-axis tick labels. For example, specify `fmt` as `'usd'` to display the labels in U.S. dollars.

`thetatickformat(pax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify `pax` as the first input argument.

`tfmt = thetatickformat` returns the format style used for *theta*-axis tick labels of the current axes. Depending on the type of labels along the *theta*-axis, `tfmt` is a character vector of a numeric format.

`tfmt = thetatickformat(pax)` returns the format style used for the axes specified by `pax` instead of the current axes.

Examples

Display *theta*-Axis Tick Labels as Degrees

Create a polar plot. Display the tick labels along the *theta*-axis as degree values.

```
th = linspace(0,2*pi);
r = 2*th;
```

```
polarplot(th,r)
thetatickformat('degrees')
```

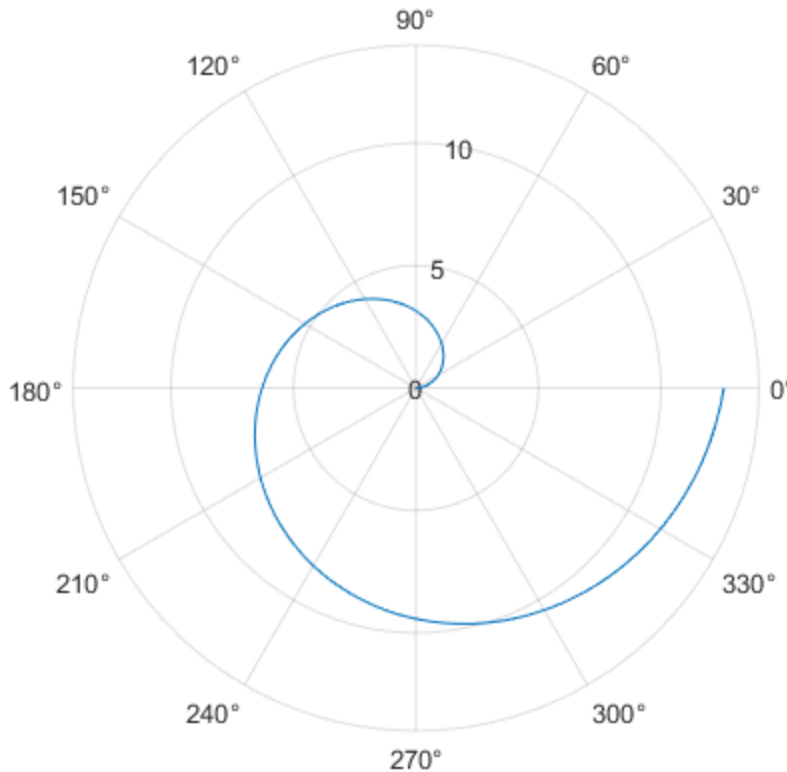

Display Text After Each *theta*-Axis Tick Label

Create a polar plot. Display the tick labels along the *theta*-axis with the text "deg" after each value.

```
th = linspace(0,2*pi);
r = th.^2;
polarplot(th,r)
thetatickformat('%g deg')
```

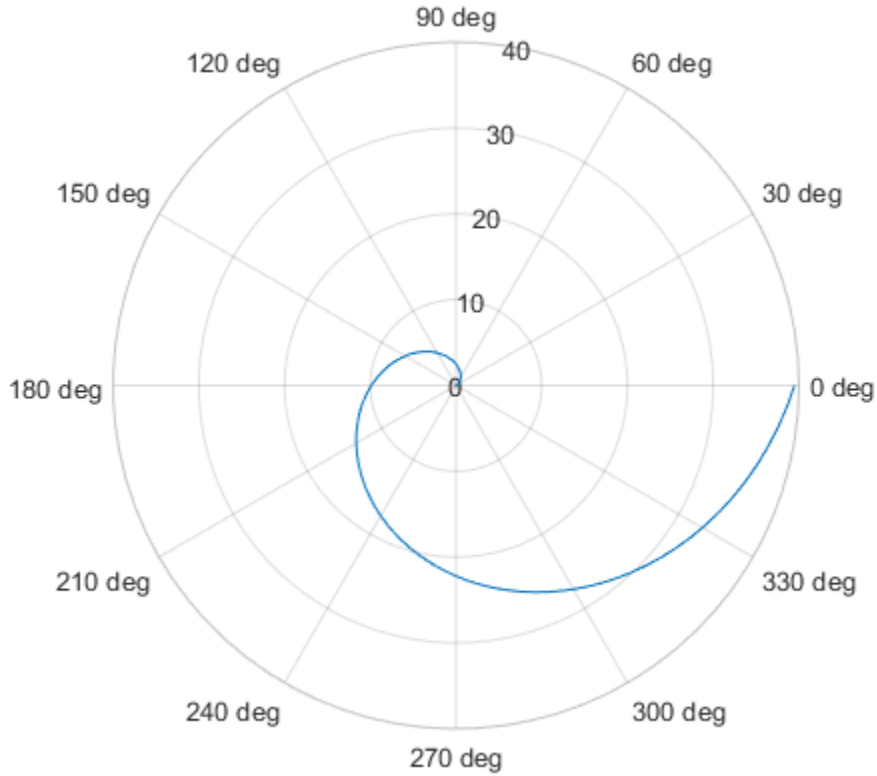

Control Number of Decimals for *theta*-Axis Tick Labels

Display the *theta*-axis tick labels with two decimal places. Control the decimal places by passing `thetatickformat` a character vector of a numeric format that uses fixed-point notation for the conversion character and a precision value of 2.

```
theta = 0:0.01:2*pi;
rho = sin(2*theta).*cos(2*theta);
polarplot(theta,rho)
thetatickformat('%.2f')
```

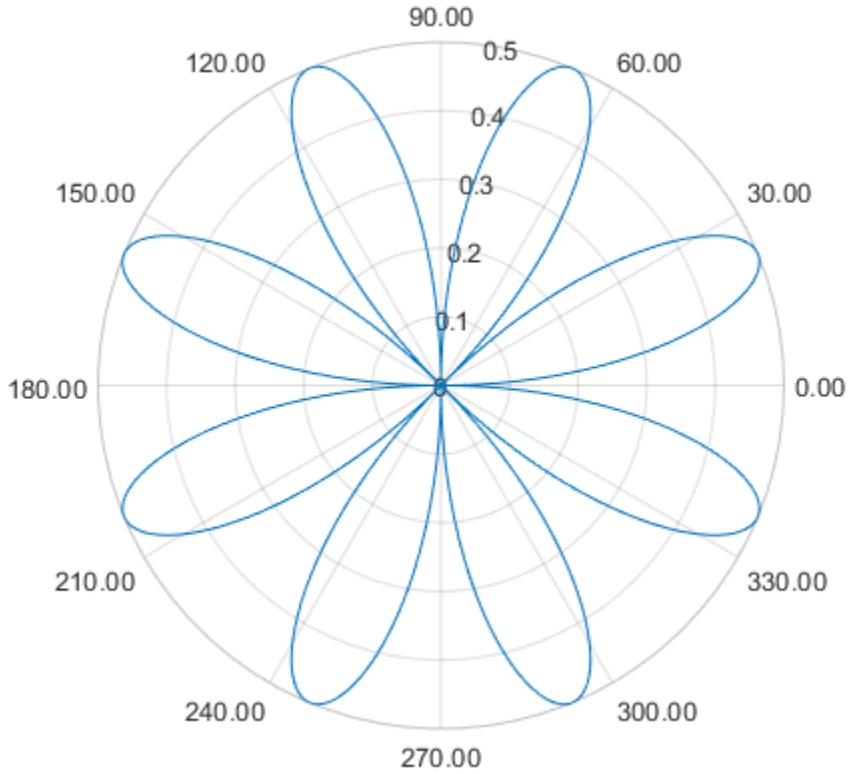

Specify *theta*-Axis Tick Label Format for Specific Polar Axes

Create a polar plot and assign the polar axes object to the variable `pax`. Ensure that `thetatickformat` affects the polar axes you just created by passing `pax` as the first input argument to the function.

```
polarplot(1:10,'->')
pax = gca;
thetatickformat(pax,'degrees')
```

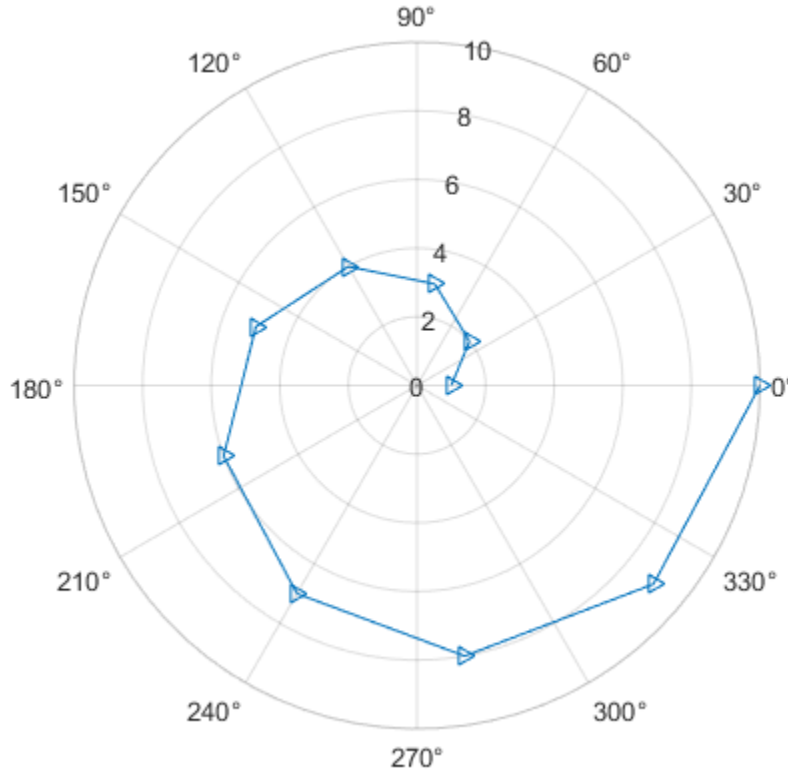

Input Arguments

`fmt` — Format for numeric tick labels

`'%g'` (default) | predefined format | character vector

Format for numeric tick labels, specified as one of the predefined formats listed in this table or a character vector of a custom numeric format.

Predefined Format	Description
`'usd'`	U.S. dollars. This option is equivalent using `'$%,.2f'`. If the labels use scientific

Predefined Format	Description
	notation, this option sets the exponent value to 0.
`'eur'`	Euro. This option is equivalent to using `'\x20AC%,.2f'` with an exponent value of 0.
`'gbp'`	British pound. This option is equivalent to using `'\x00A3%,.2f'` with an exponent value of 0.
`'jpy'`	Japanese yen. This option is equivalent to using `'\x00A5%,d'` with an exponent value of 0.
`'degrees'`	Display degree symbol after values. This option is equivalent to using `'%g\x00B0'` with the default exponent value.
`'percentage'`	Display percent sign after values. This option is equivalent to using `'%g%%'` with the default exponent value.
`'auto'`	Default format of `'%g'` with the default exponent value.

Example: `thetatickformat('usd')`

Character Vector of Numeric Format

You can specify a custom numeric format by creating a character vector of identifiers.

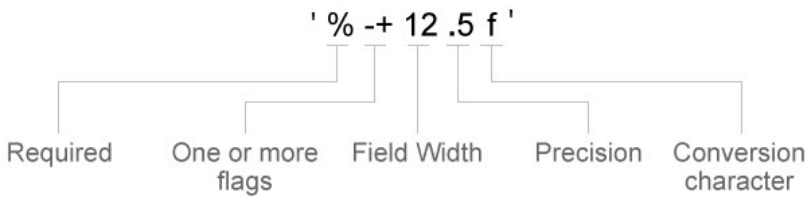

Identifiers are optional, except the percent sign and conversion character. Construct the format in this order:

- One or more flags — Options such as adding a plus sign before positive values. For a full list of options, see the table of Optional Flags.
- Field width — Minimum number of characters to print in the tick label. Specify the field width as an integer value. If the number of significant digits in the tick value is smaller than the field width, then the label is padded with spaces.
- Precision — Number of digits to the right of the decimal point or the number of significant digits, depending on the conversion character. Specify the precision as an integer value.
- Conversion character — Value type. For a full list of options, see the table of Conversion Characters. If you specify a conversion that does not fit the data, then MATLAB overrides the specified conversion, and uses `%e`.

Also, you can specify literal text at the beginning or end of the format. To print a single quotation mark, use `''`. To print a percent character, use `%%`.

Example: `thetatickformat('%.2f')` displays the values using fixed-point notation with two decimal places.

Example: `thetatickformat('$%.2f')` displays a dollar sign before each value.

Example: `thetatickformat('%.2f million')` displays `million` after each value.

Optional Flags

Identifier	Description	Example of Numeric Format
`,`	Display commas every three digits, such as `'1,000'`.	`'%,4.4g'`
`+`	Print the sign character (+) for positive values, such as `'+100'`.	`'%+4.4g'`
`0`	Pad the field width with leading zeros instead of spaces, such as `'0100'`.	`'%04.4g'`
`–`	Left-justify, which pads the end of the value with spaces instead of the beginning. For example, if the field width is `4`, then this flag	`'%-4.4g'`

Identifier	Description	Example of Numeric Format
	formats the label as `'100 '` instead of `' 100'`.	
`#`	For the `%f`, `%e`, and `%g` conversion characters, print the decimal point even when the precision is 0, such as `'100.'`. For `%g`, do not remove trailing zeros.	`'%#4.4g'`

Conversion Characters

Identifier	Description	Example
`d` or `i`	Signed integer with base 10. The precision value indicates the number of significant digits.	`'%.4d'` displays π as `0003`.
`f`	Fixed-point notation. The precision value indicates the number of decimal places.	`'%.4f'` displays π as `3.1416`.
`e`	Exponential notation. The precision value indicates the number of decimal places.	`'%.4e'` displays π as 3.1416×10^0.
`g`	The more compact version of `e` or `f`, with no trailing zeros. The precision value indicates the maximum number of decimal places.	`'%.4g'` displays π as `3.1416`.

`pax` — One or more polar axes

current axes (default) | single object | vector of objects

One or more polar axes, specified as a single object or a vector of objects. If you do not specify a polar axes object, then `thetatickformat` uses the current axes.

Algorithms

The `thetatickformat` function sets and queries the `TickLabelFormat` property of the ruler object associated with the *theta*-axis.

See Also

See Also

`rtickformat` | `thetalim` | `thetaticklabels` | `thetaticks`

Introduced in R2016b

thetaticklabels

Set or query *theta*-axis tick labels

Syntax

```
thetaticklabels(labels)
tl = thetaticklabels

thetaticklabels('auto')
thetaticklabels('manual')
m = thetaticklabels('mode')

___ = thetaticklabels(pax, ___ )
```

Description

`thetaticklabels(labels)` sets the *theta*-axis tick labels for the current axes. Specify `labels` as a cell array of character vectors; for example, `{'E','N','W','S'}`. If you specify the labels, then the *theta*-axis tick values and tick labels no longer update automatically based on changes to the axes.

`tl = thetaticklabels` returns the *theta*-axis tick labels for the current axes.

`thetaticklabels('auto')` sets an automatic mode, enabling the axes to determine the *theta*-axis tick labels. Use this option if you set the labels and then want to set them back to the default values.

`thetaticklabels('manual')` sets a manual mode, freezing the *theta*-axis tick labels at the current values.

`m = thetaticklabels('mode')` returns the current value of the *theta*-axis tick labels mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify the tick labels or set the mode to manual.

`___ = thetaticklabels(pax, ___ )` uses the axes specified by `pax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes.

Examples

Specify theta-Axis Tick Values and Labels

Create a polar plot. Display tick marks and grid lines along the *theta*-axis at 0, 90, 180, and 270 degrees. Then, specify a label for each tick mark.

```
theta = linspace(0,2*pi);
rho = theta/10;
polarplot(theta,rho)

thetaticks([0 90 180 270])
thetaticklabels({'East','North','West','South'})
```

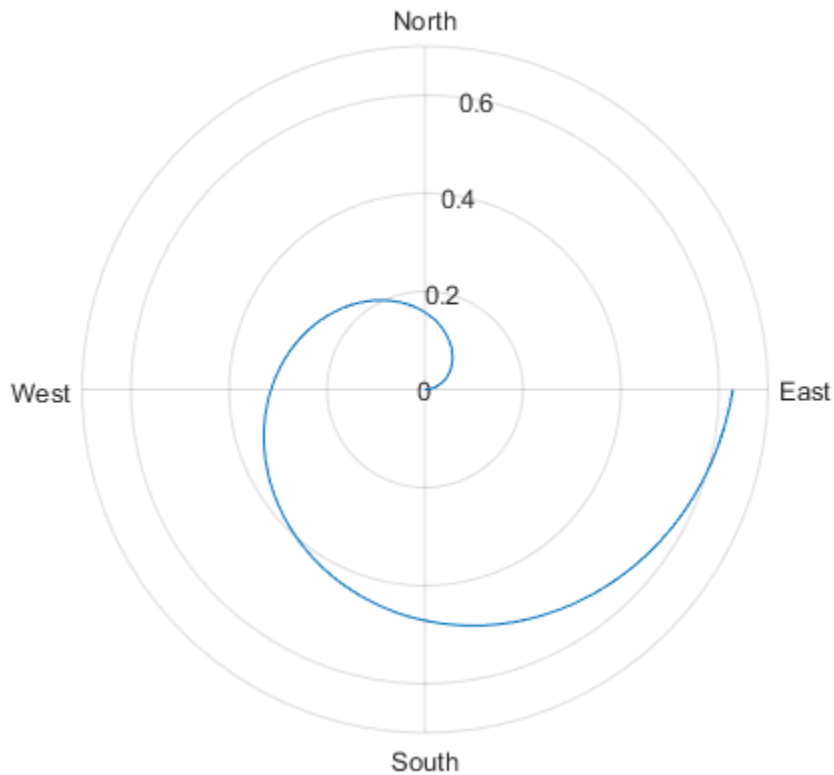

Set theta-Axis Tick Labels for Specific Polar Axes

Create a polar plot and assign the polar axes object to the variable `pax`. Then, specify the *theta*-axis tick values and labels for the polar axes. Ensure that the `thetaticks` and `thetaticklabels` functions affect `pax` by passing the polar axes object as the first input argument to the functions.

```
theta = 0:0.01:2*pi;
rho = 50*sin(2*theta);
polarplot(theta,rho)
pax = gca;

thetaticks(pax,[0 90 180 270])
thetaticklabels(pax,{'East','North','West','South'})
```

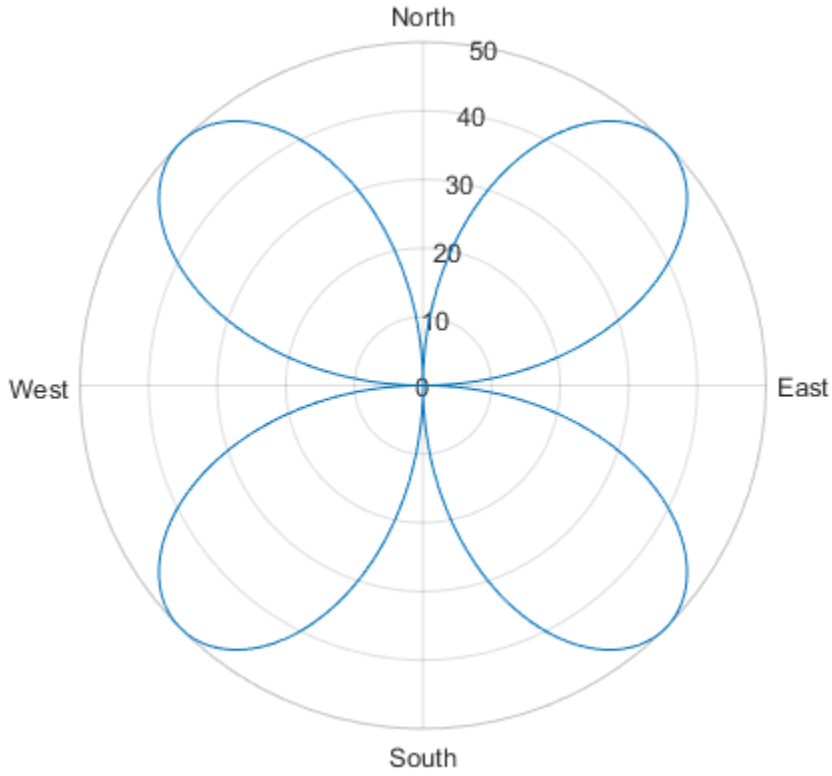

Set theta-Axis Tick Labels Back to Default Labels

Create a polar plot and specify the *theta*-axis tick values and corresponding labels. Then, set the *theta*-axis tick values and labels back to the default values.

```
polarplot(1:100)
thetaticks([45 135 225 315])
thetaticklabels({'NE','NW','SW','SE'})
```

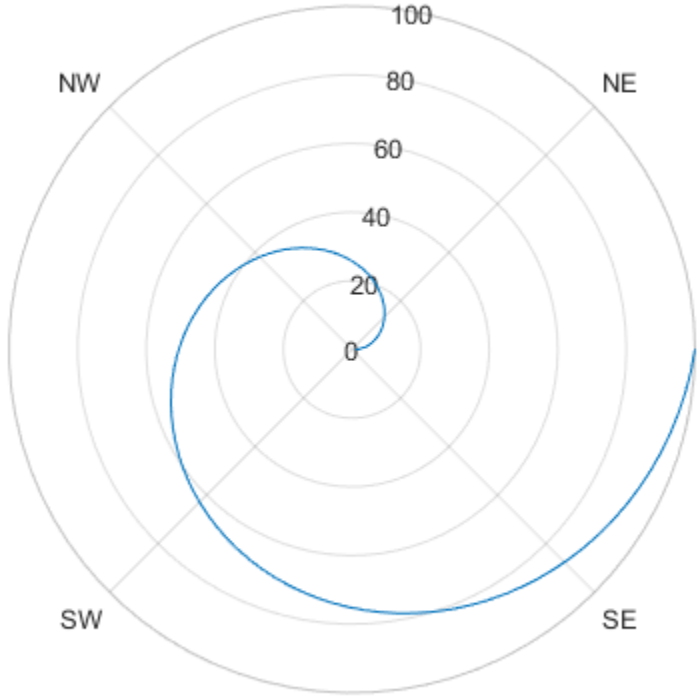


```
thetaticks('auto')
thetaticklabels('auto')
```

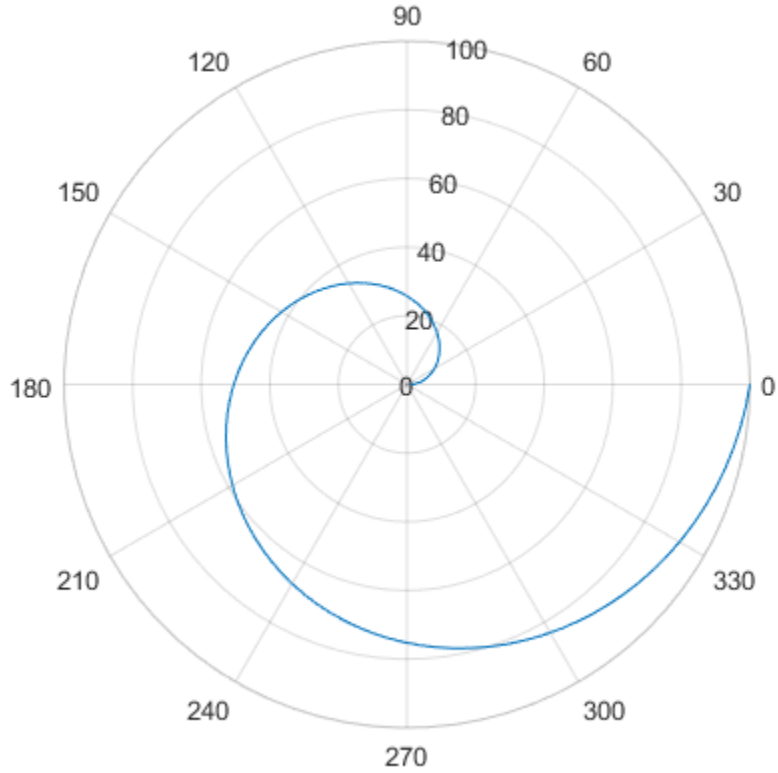

Remove theta-Axis Tick Labels

Remove the tick labels along the *theta*-axis by specifying the tick labels as an empty array.

```
theta = 0:0.01:2*pi;
rho = 50*sin(2*theta);
polarplot(theta,rho)
thetaticklabels({})
```

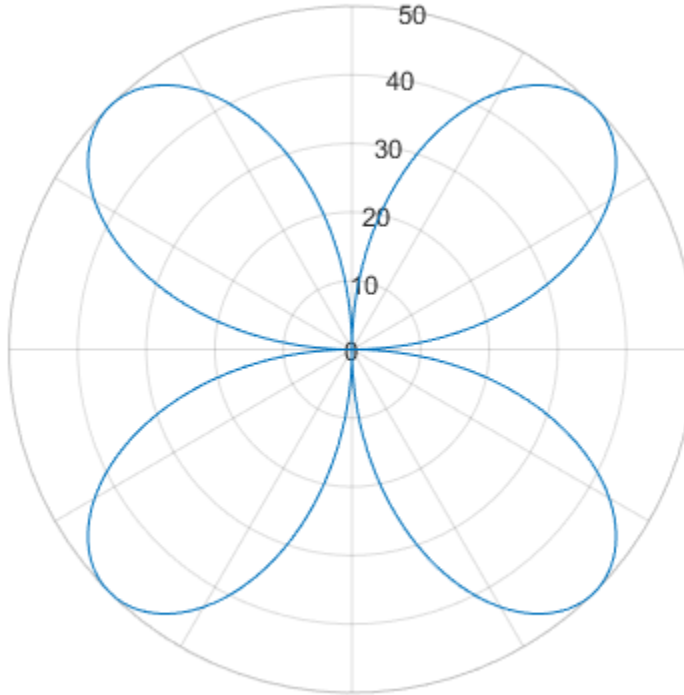

Input Arguments

`labels` — Tick labels

cell array of character vectors

Tick labels, specified as a cell array of character vectors. If you do not want tick labels to show, then specify an empty cell array `{}`. Tick labels support TeX and LaTeX markup. See the TickLabelInterpreter property of the axes object for more information.

Example: `thetaticklabels({'0','\pi','2\pi'})`

Example: `thetaticklabels({'January','Febrary','March'})`

Example: `thetaticklabels({})`

Note: To specify the tick values, use the `thetaticks` function.

`pax` — One or more polar axes

current axes (default) | single object | vector of objects

One or more polar axes, specified as a single object or a vector of objects. If you do not specify the polar axes, then `thetaticklabels` uses the current axes.

Output Arguments

`tl` — Current tick labels

cell array of character vectors | character matrix

Current tick labels, returned as a cell array of character vectors or a character matrix.

`m` — Current tick labels mode

`'auto'` | `'manual'`

Current tick labels mode, returned as one of these values:

- `'auto'` — Axes automatically determines the *theta*-axis tick labels.
- `'manual'` — Axes uses manually specified *theta*-axis tick labels.

Definitions

Tick Labels

The tick labels are the labels that you see next to each tick mark. The tick values are the locations along the *theta*-axis where the tick marks appear. Set the tick values using the `thetaticks` function. Set the corresponding tick labels using the `thetaticklabels` function.

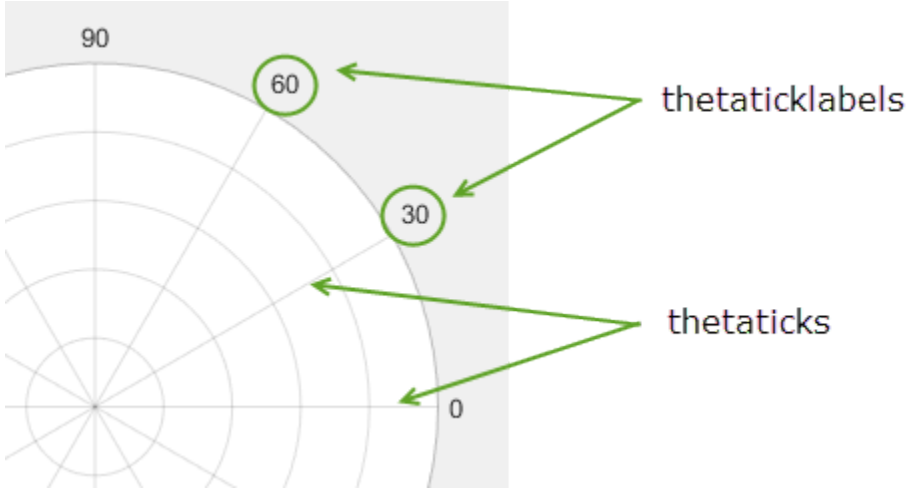

Algorithms

The `thetaticklabels` function sets and queries several polar axes properties related to the *theta*-axis tick labels.

- ThetaTickLabel — Property that stores the text for the *theta*-axis tick labels.
- ThetaTickLabelMode — Property that stores the *theta*-axis tick label mode. When you set the *theta*-axis tick labels using `thetaticklabels`, this property changes to `'manual'`.
- ThetaTickMode — Property that stores the *theta*-axis tick value mode. When you set the *theta*-axis tick labels using `thetaticklabels`, this property changes to `'manual'`.

See Also

See Also

Functions

`rticklabels` | `thetalim` | `thetatickformat` | `thetaticks`

Properties
PolarAxes Properties

Introduced in R2016b

thetaticks

Set or query *theta*-axis tick values

Syntax

```
thetaticks(ticks)
tv = thetaticks
```

```
thetaticks('auto')
thetaticks('manual')
m = thetaticks('mode')
```

```
___ = thetaticks(pax, ___ )
```

Description

`thetaticks(ticks)` sets the *theta*-axis tick values, which are the locations along the *theta*-axis where the tick marks and grid lines appear. Specify `ticks` as a vector of increasing values; for example, `[0 90 180 270]`. This command affects the current axes.

`tv = thetaticks` returns the current *theta*-axis tick values as a vector.

`thetaticks('auto')` sets an automatic mode, enabling the axes to determine the *theta*-axis tick values. Use this option if you change the tick values and then want to set them back to the default values.

`thetaticks('manual')` sets a manual mode, freezing the *theta*-axis tick values at the current values. Use this option if you want to retain the current tick values when resizing the axes or adding new data to the axes.

`m = thetaticks('mode')` returns the current *theta*-axis tick labels mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify tick values or change the mode to manual.

`___ = thetaticks(pax, ___ )` uses the axes specified by `pax` instead of the current axes. Specify `pax` as the first input argument for any of the previous syntaxes.

Examples

Specify theta-Axis Tick Values and Labels

Create a polar plot. Display tick marks and grid lines along the *theta*-axis at 0, 90, 180, and 270 degrees. Then, specify a label for each tick mark.

```
theta = linspace(0,2*pi);
rho = theta/10;
polarplot(theta,rho)

thetaticks([0 90 180 270])
thetaticklabels({'East','North','West','South'})
```

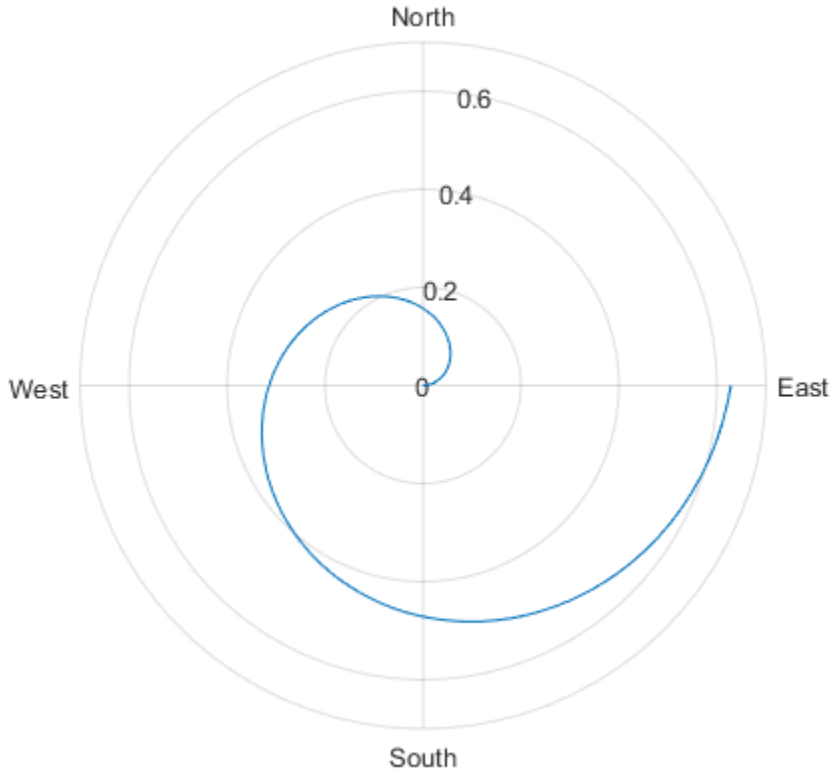

Specify Nonuniform theta-Axis Tick Values

Display tick marks along the *theta*-axis at nonuniform values between 0 and 360 degrees.

```
theta = linspace(0,2*pi);
rho = theta/10;
polarplot(theta,rho)
thetaticks([0 30 60 90 180 210 240 270])
```

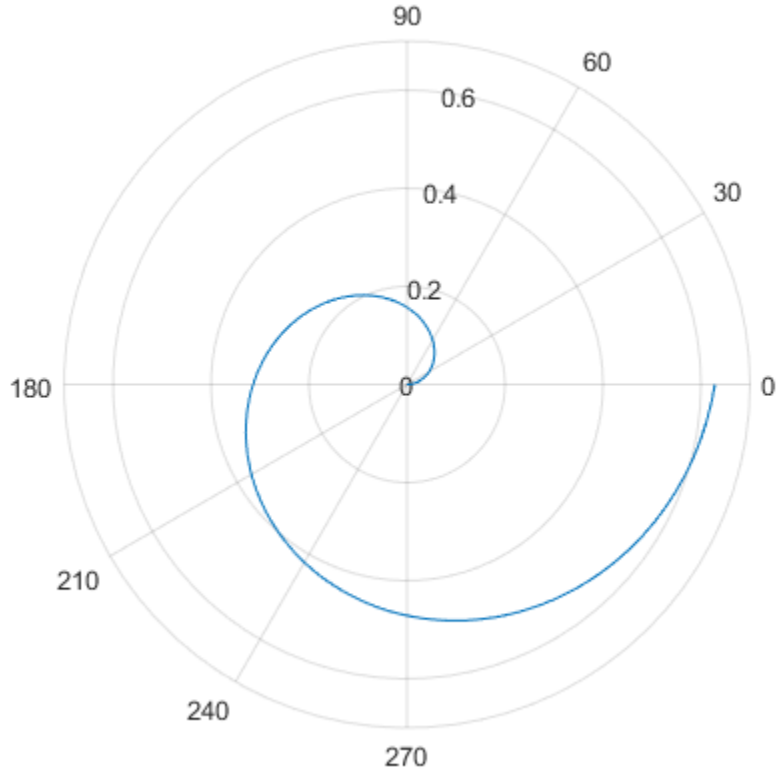

Increment theta-Axis Values by 15 Degrees

Display tick marks along the *theta*-axis every 15 degrees.

```
theta = 0:0.01:2*pi;
rho = sin(2*theta).*cos(2*theta);
polarplot(theta,rho)
thetaticks(0:15:360)
```

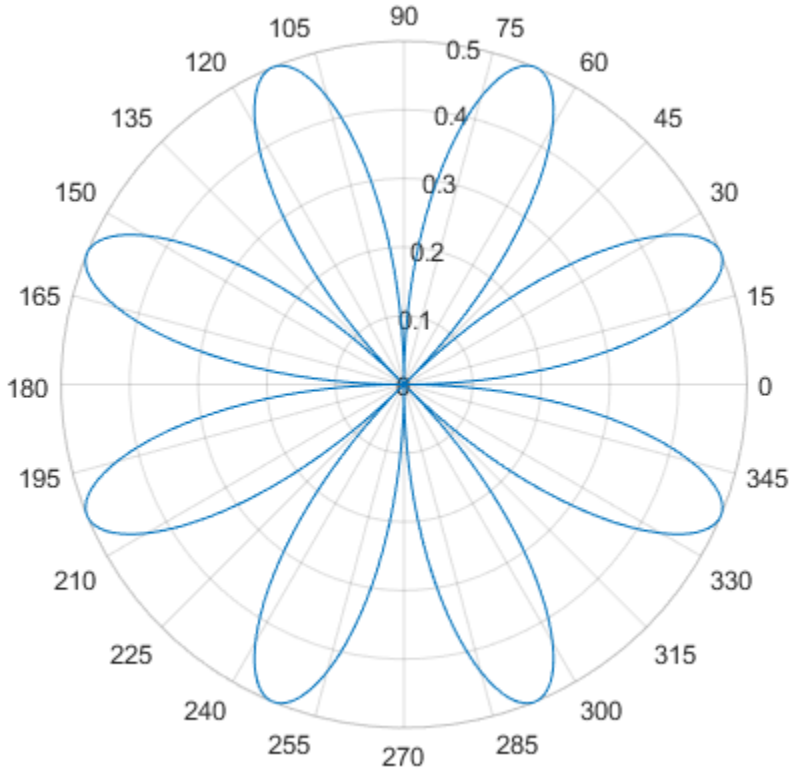

Set theta-Axis Tick Values Back to Default Values

Create a polar plot and specify the *theta*-axis tick values. Then, set the *theta*-axis tick values back to the default values.

```
polarplot(1:10)
thetaticks([0 120 240])
```

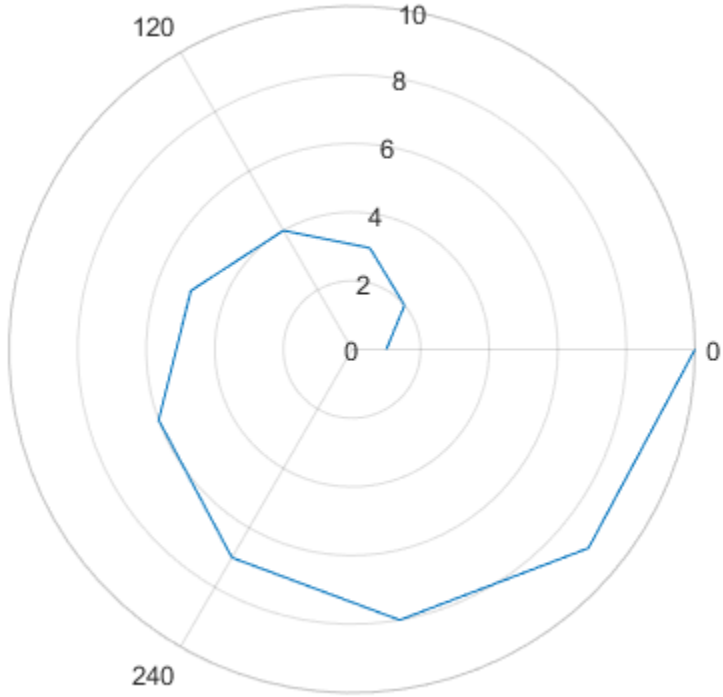


```
thetaticks('auto')
```

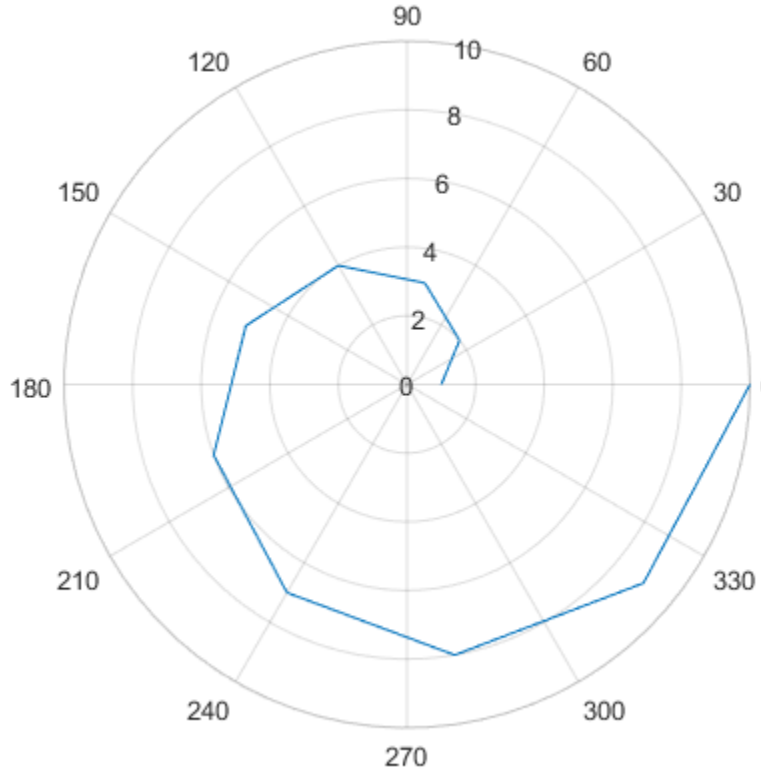

Set theta-Axis Tick Values for Specific Polar Axes

Create polar axes and return the polar axes object `pax`. Ensure that `thetaticks` affects the polar axes you just created by passing `pax` as the first input argument to the function.

```
pax = polaraxes;
thetaticks(pax,0:45:360)
```

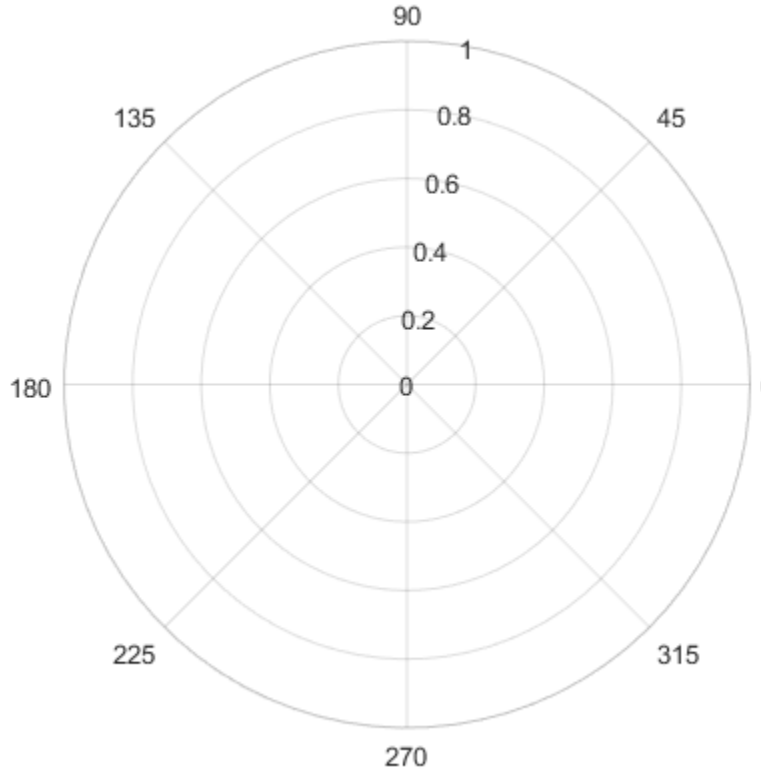

Remove theta-Axis Tick Marks and Grid Lines

Remove the tick marks and grid lines along the *theta*-axis by specifying the tick values as an empty array.

```
theta = 0:0.01:2*pi;
rho = sin(2*theta).*cos(2*theta);
polarplot(theta,rho)
thetaticks([])
```

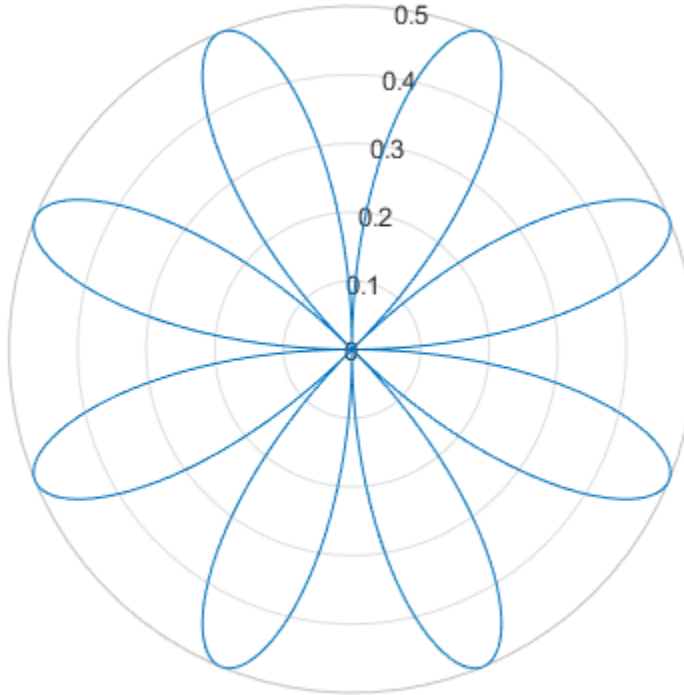

Input Arguments

`ticks` — Tick values

vector of increasing values

Tick values, specified as a vector of increasing values. The tick values are interpreted in units determined by the ThetaAxisUnits property. By default, the units are degrees.

If you do not want tick marks along the *theta*-axis, specify an empty vector `[]`.

Example: `thetaticks([0 90 180 270])`

Example: `thetaticks([0:30:330])`

Example: `thetaticks([])`

Note: To specify the tick labels, use the `thetaticklabels` function.

`pax` — One or more polar axes

current axes (default) | single object | vector of objects

One or more polar axes, specified as a single object or a vector of objects. If you do not specify the polar axes, then `thetaticks` uses the current axes.

Output Arguments

`tv` — Current tick values

vector

Current tick values, returned as a vector.

`m` — Current mode

`'auto'` | `'manual'`

Current mode, returned as one of these values:

- `'auto'` — Axes automatically determines the *theta*-axis tick values.
- `'manual'` — Axes uses manually specified *theta*-axis tick values.

Definitions

Tick Values

The tick values are the locations along the *theta*-axis where the tick marks appear. The tick labels are the labels that you see next to each tick mark. Set the tick values using the `thetaticks` function. Set the corresponding tick labels using the `thetaticklabels` function.

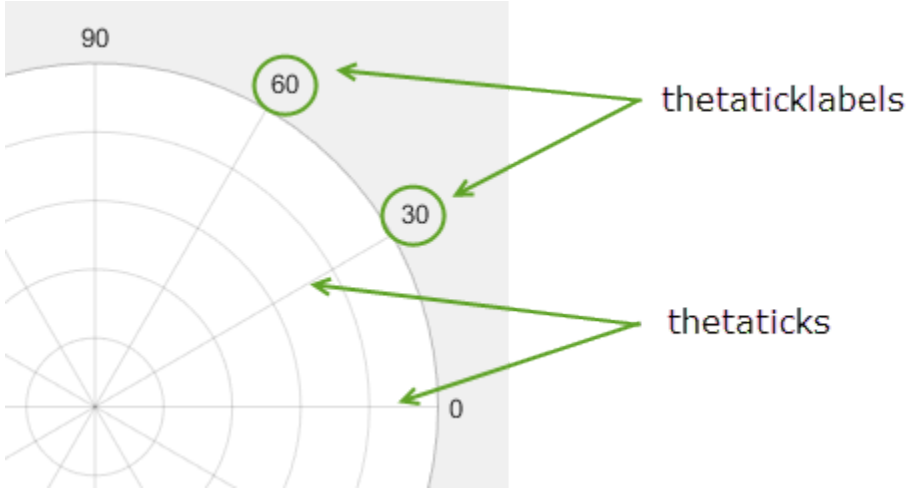

Algorithms

The `thetaticks` function sets and queries several axes properties related to the *theta*-axis tick values.

- ThetaTick — Property that stores the *theta*-axis tick values.
- ThetaTickMode — Property that stores the *theta*-axis tick value mode. When you set the *theta*-axis tick values, this property changes to `'manual'`.

See Also

See Also

Functions
`rticklabels` | `rticks` | `thetalim` | `thetatickformat` | `thetaticklabels`

Properties
PolarAxes Properties

Introduced in R2016b

tic

Start stopwatch timer

Syntax

```
tic
timerVal = tic
```

Description

`tic` starts a stopwatch timer to measure performance. The function records the internal time at execution of the `tic` command. Display the elapsed time with the `toc` function.

`timerVal = tic` returns the value of the internal timer at the execution of the `tic` command, so that you can record time for simultaneous time spans.

Output Arguments

`timerVal`

Value of the internal timer at the execution of the `tic` command. This value is used as an input argument for a subsequent call to `toc`. You should not rely on the meaning of this value.

Examples

Measure time to generate two random matrices and compute element-by-element multiplication of their transposes.

```
tic
A = rand(12000, 4400);
B = rand(12000, 4400);
toc
```

```
C = A'.*B';
toc
```

Measure how the time required to solve a linear system varies with the order of a matrix:

```
t = zeros(1,100);
for n = 1:100
    A = rand(n,n);
    b = rand(n,1);
    tic;
    x = A\b;
    t(n) = toc;
end
plot(t)
```

Measure multiple time spans simultaneously using two pairs of `tic/toc` calls. To do this, measure the minimum and average time to compute a summation of Bessel functions:

```
REPS = 1000;   minTime = Inf;   nsum = 10;
tic;  % TIC, pair 1

for i=1:REPS
   tStart = tic;  % TIC, pair 2
   total = 0;
   for j=1:nsum
      total = total + besselj(j,REPS);
   end

   tElapsed = toc(tStart);  % TOC, pair 2
   minTime = min(tElapsed, minTime);
end
averageTime = toc/REPS;  % TOC, pair 1
```

Tips

- Consecutive `tic` commands overwrite the internally recorded starting time.
- The `clear` function does not reset the starting time recorded by a `tic` command.
- The following actions result in unexpected output:
  - Using `tic` and `toc` to time `timeit`
  - Using `tic` and `toc` within a function timed by `timeit`

See Also

`clock` | `cputime` | `etime` | `profile` | `timeit` | `toc`

Introduced before R2006a

timeit

Measure time required to run function

Syntax

```
t = timeit(f)
t = timeit(f,numOutputs)
```

Description

`t = timeit(f)` measures the typical time (in seconds) required to run the function specified by the function handle `f`.

`t = timeit(f,numOutputs)` calls `f` with the desired number of outputs, `numOutputs`. By default, `timeit` calls the function `f` with one output (or no outputs, if the function does not return any outputs).

Examples

Determine Time to Obtain Current Date

Use `timeit` to time a function call to `date`. This example uses a handle to a function that accepts no input.

```
f = @date;
t = timeit(f)
```

```
t = 1.1448e-04
```

Determine Time to Compute Matrix Summation

Time the combination of several mathematical matrix operations: matrix transposition, element-by-element multiplication, and summation of columns.

```
A = rand(12000,400);
```

```
B = rand(400,12000);
f = @() sum(A.'.*B, 1);
timeit(f)
```

```
ans = 0.0592
```

Compare Time to Run svd with Multiple Outputs

Determine how long it takes to run `svd` with one output argument, `s = svd(X)`.

```
X = rand(100);
f = @() svd(X);
t1 = timeit(f)
```

```
t1 = 0.0013
```

Compare the results to `svd` with three output arguments, `[U,S,V] = svd(X)`.

```
t2 = timeit(f,3)
```

```
t2 = 0.0045
```

Compare Time to Execute Custom Preallocation to Calling `zeros`

Create a short function to allocate a matrix using nested loops. Preallocating an array using a nested loop is inefficient, but is shown here for illustrative purposes.

```
function mArr = preAllocFcn(x,y)
for m = 1:x
    for n = 1:y
        mArr(m,n) = 0;
    end
end
end
```

Compare the time to allocate zeros to a matrix using nested loops and using the `zeros` function.

```
x = 1000;
y = 500;
g = @() preAllocFcn(x,y);
```

```
h = @() zeros(x,y);
diffRunTime = timeit(g)-timeit(h)
```

```
diffRunTime =

    0.1584
```

Input Arguments

f — function to be measured

function handle

Function to be measured, specified as a function handle. `f` is either a handle to a function that takes no input, or a handle to an anonymous function with an empty argument list.

numOutputs — Number of desired outputs from f

integer

Number of desired outputs from `f`, specified as an integer. If the function specified by `f` has a variable number of outputs, `numOutputs` specifies which syntax `timeit` uses to call the function. For example, the `svd` function returns a single output, `s`, or three outputs, `[U,S,V]`. Set `numOutputs` to `1` to time the `s = svd(X)` syntax, or set it to `3` to time the `[U,S,V] = svd(X)` syntax.

Tips

- The following actions result in unexpected output:
  - Using `timeit` between `tic` and `toc`
  - Using `timeit` to time a function that includes calls to `tic` and `toc`
  - Using `timeit` recursively

Algorithms

`timeit` calls the specified function multiple times, and computes the median of the measurements.

See Also

See Also

`cputime` | `tic` | `toc`

Topics

"Create Function Handle"
Anonymous Functions
Analyzing Your Program's Performance
MATLAB Performance Measurement White Paper on MATLAB Central File Exchange

Introduced in R2013b

toc

Read elapsed time from stopwatch

Syntax

```
toc
elapsedTime = toc
toc(timerVal)
elapsedTime = toc(timerVal)
```

Description

`toc` reads the elapsed time from the stopwatch timer started by the `tic` function. The function reads the internal time at the execution of the `toc` command, and displays the elapsed time since the most recent call to the `tic` function that had no output, in seconds.

`elapsedTime = toc` returns the elapsed time in a variable.

`toc(timerVal)` displays the time elapsed since the `tic` command corresponding to `timerVal`.

`elapsedTime = toc(timerVal)` returns the elapsed time since the `tic` command corresponding to `timerVal`.

Input Arguments

`timerVal`

Value of the internal timer saved from a previous call to the `tic` command.

Output Arguments

elapsedTime

Scalar `double` representing the time elapsed between `tic` and `toc` commands, in seconds.

Examples

Measure time to generate two random matrices and compute element-by-element multiplication of their transposes.

```
tic
A = rand(12000, 4400);
B = rand(12000, 4400);
toc
C = A'.*B';
toc
```

Measure how the time required to solve a linear system varies with the order of a matrix:

```
t = zeros(1,100);
for n = 1:100
    A = rand(n,n);
    b = rand(n,1);
    tic;
    x = A\b;
    t(n) = toc;
end
plot(t)
```

Measure multiple time spans simultaneously using two pairs of `tic/toc` calls. To do this, measure the minimum and average time to compute a summation of Bessel functions:

```
REPS = 1000;   minTime = Inf;   nsum = 10;
tic;  % TIC, pair 1

for i=1:REPS
   tStart = tic;  % TIC, pair 2
   total = 0;
   for j=1:nsum
```

```
      total = total + besselj(j,REPS);
   end

   tElapsed = toc(tStart);  % TOC, pair 2
   minTime = min(tElapsed, minTime);
end
averageTime = toc/REPS;  % TOC, pair 1
```

Tips

- Consecutive calls to the `toc` function with no input return the elapsed since the most recent `tic`. Therefore, you can take multiple measurements from a single point in time.

  Consecutive calls to the `toc` function with the same `timerVal` input return the elapsed time since the `tic` function call that corresponds to that input.
- The following actions result in unexpected output:
  - Using `tic` and `toc` to time `timeit`
  - Using `tic` and `toc` within a function timed by `timeit`

See Also

`clock` | `cputime` | `etime` | `profile` | `tic` | `timeit`

Introduced before R2006a

Tiff class

MATLAB Gateway to LibTIFF library routines

Description

The `Tiff` class represents a connection to a Tagged Image File Format (TIFF) file and provides access to many of the capabilities of the LibTIFF library. Use the methods of the `Tiff` object to call routines in the LibTIFF library. While you can use the `imread` and `imwrite` functions to read and write TIFF files, the `Tiff` class offers capabilities that these functions don't provide, such as reading subimages, writing tiles and strips of image data, and modifying individual TIFF tags.

In most cases, the syntax of the `Tiff` method is similar to the syntax of the corresponding LibTIFF library function. To get the most out of the `Tiff` object, you must be familiar with the LibTIFF API, as well as the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

MATLAB supports LibTIFF version 4.0.0.

For copyright information, see the `libtiffcopyright.txt` file.

Construction

`obj = Tiff(filename,mode)` creates a `Tiff` object associated with the TIFF file `filename`. `mode` specifies the type of access to the file.

A TIFF file is made up of one or more image file directories (IFDs). An IFD contains image data and associated metadata. IFDs can also contain subIFDs which also contain image data and metadata. When you open a TIFF file for reading, the Tiff object makes the first IFD in the file the *current* IFD. `Tiff` methods operate on the current IFD. You can use `Tiff` object methods to navigate among the IFDs and the subIFDs in a TIFF file.

When you open a TIFF file for writing or appending, the `Tiff` object automatically creates a IFD in the file for writing subsequent data. This IFD has all the default values specified in TIFF Revision 6.0.

When creating a new TIFF file, before writing any image to the file, you must create certain required fields (tags) in the file. These tags include `ImageWidth`, `ImageHeight`, `BitsPerSample`, `SamplesPerPixel`, `Compression`, `PlanarConfiguration`, and `Photometric`. If the image data has a stripped layout, the IFD contains the `RowsPerStrip` tag. If the image data has a tiled layout, the IFD contains the `TileWidth` and `TileHeight` tags. Use the `setTag` method to define values for these tags.

Input Arguments

`filename`

Character vector specifying name of file.

`mode`

Type of access to the TIFF file specified as one of the following.

Supported Values

Parameter	Description
`'r'`	Open file for reading (default)
`'w'`	Open file for writing; discard existing contents
`'w8'`	Open file for writing a BigTIFF file; discard existing contents
`'a'`	Open or create file for writing; append data to end of file.
`'r+'`	Open (do not create) file for reading and writing

Properties

`Compression`

Specify scheme used to compress image data

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the `setTag` method. For more clarification, see the example.

Supported Values

`None`
`CCITTRLE (Read-only)`
`CCITTFax3`
`CCITTFax4`
`LZW`
`JPEG`
`CCITTRLEW (Read-only)`
`PackBits`
`SGILog`
`SGILog24`
`Deflate`
`AdobeDeflate (Same as deflate)`

Example: Set the `Compression` tag to the value `JPEG`. Note how you use the property to specify the value.

```
tiffobj.setTag('Compression', Tiff.Compression.JPEG);
```

`ExtraSamples`

Describe extra components

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the `setTag` method. For more clarification, see the example.

This field is required if there are extra channels in addition to the usual colormetric channels.

Supported Values

Value of `ExtraSamples`	Description
`Unspecified`	Unspecified data

Value of ExtraSamples	Description
AssociatedAlpha	Associated alpha (pre-multiplied)
UnassociatedAlpha	Unassociated alpha data

Example: Set the ExtraSamples tag to the value AssociatedAlpha. Note how you use the property to specify the value.

```
tiffobj.setTag('ExtraSamples', Tiff.ExtraSamples.AssociatedAlpha);
```

See Also "Specify Tiff object properties and describe alpha channel" on page 1-11579

Group3Options

Options for Group 3 Fax Compression

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the setTag method. For more clarification, see the example.

This property is also referred to as Fax3 and T4Options. This value is a bit mask controlled by the first three bits.

Supported Values

Supported values include the following.

Encoding2D	Bit 0 is 1. This specifies two-dimensional coding. If more than one strip is specified, each strip must begin with a one-dimensionally coded line. That is, RowsPerStrip should be a multiple of Parameter K, as documented in the CCITT specification.
Uncompressed	Bit 1 is 1. This specifies an uncompressed mode when encoding.
FillBits	Bit 2 is 1. Fill bits are added as necessary before EOL codes such that EOL always ends on a byte boundary. This ensures an EOL-sequence of 1 byte preceded by a zero nibble, for example, xxxx-0000 0000-0001.

Example:

```
mask = bitor(Tiff.Group3Options.Encoding2D,Tiff.Group3Options.Uncompressed)
```

```
tiffobj.setTag('Group3Options',mask);
```

InkSet

Specify set of inks used in separated image

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the `setTag` method. For more clarification, see the example.

In this context, separated refers to photometric interpretation, not the planar configuration.

Supported Values

`CMYK`	Order of components: cyan, magenta, yellow, black. Usually, a value of 0 represents 0% ink coverage and a value of 255 represents 100% ink coverage for that component, but consult the TIFF specification for `DotRange`. When you specify CMYK, do not set the `InkNames` tag.
`MultiInk`	Any ordering other than CMYK. Consult the TIFF specification for `InkNames` field for a description of the inks used.

Example:

```
tiffobj.setTag('InkSet', Tiff.InkSet.CMYK);
```

JPEGColorMode

Specify control of YCbCr/RGB conversion

Use these values only when the photometric interpretation is YCbCr.

This property should not be used for the purpose of reading YCbCr imagery as RGB. In this case, use the RGBA interface provided by the `readRGBAImage`, `readRGBAStrip`, and `readRGBATile` methods.

Supported Values

`Raw` (default)	Keep input as separate Y, Cb, and Cr matrices.
`RGB`	Convert RGB input to YCbCr.

Example:

```
tiffobj.setTag('JPEGColorMode',Tiff/JPEGColorMode.RGB);
```

See also “Create YCbCr/JPEG image from RGB data” on page 1-11579

Orientation

Specify visual orientation of the image data.

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the `setTag` method. For more clarification, see the example.

The first row represents the top of the image, and the first column represents the left side. Support for this tag is for informational purposes only, and it does not affect how MATLAB reads or writes the image data.

Supported Values

`TopLeft`
`TopRight`
`BottomRight`
`BottomLeft`
`LeftTop`
`RightTop`
`RightBottom`
`LeftBottom`

Example:

```
tiffobj.setTag('Orientation', Tiff.Orientation.TopRight);
```

Photometric

Specify color space of image data

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the `setTag` method. For more clarification, see the example.

Supported Values

`MinIsWhite`
`MinIsBlack`
`RGB`
`Palette`
`Mask`
`Separated (CMYK)`
`YCbCr`
`CIELab`
`ICCLab`
`ITULab`
`LogL`
`LogLUV`
`CFA`
`LinearRaw`

Example:

```
tiffobj.setTag('Photometric', Tiff.Photometric.RGB);
```

`PlanarConfiguration`

Specifies how image data components are stored on disk

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the `setTag` method. For more clarification, see the example.

Supported Values

`Chunky`	Store component values for each pixel contiguously. For example, in the case of RGB data, the first three pixels would be stored in the file as RGBRGBRGB etc. Almost all TIFF images have contiguous planar configurations.

`Separate`	Store component values for each pixel separately. For example, in the case of RGB data, the red component would be stored separately in the file from the green and blue components.

Example:

```
tiffobj.setTag('PlanarConfiguration', Tiff.PlanarConfiguration.Chunky);
```

ResolutionUnit

Specify unit of measure used to interpret the `XResolution` and `YResolution` tags.

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the `setTag` method. For more clarification, see the example.

Supported Values

`None` (default)
`Inch`
`Centimeter`

Example: Set `ResolutionUnit` tag to the value `Inch`. Then, setting `XResolution` tag to 300 means pixels per inch.

```
tiffObj.setTag('ResolutionUnit', Tiff.ResolutionUnit.Inch);
tiffObj.setTag('XResolution', 300);
tiffObj.setTag('YResolution', 300);
```

SampleFormat

Specify how to interpret each pixel sample

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the `setTag` method. For more clarification, see the examples.

Supported Values

`UInt` (default)
`Int`

IEEEFP

Void, ComplexInt, and ComplexIEEEFP are not supported.

Example:

```
tiffobj.setTag('SampleFormat', Tiff.SampleFormat.IEEEFP);
```

SGILogDataFmt

Specify control of client data for SGILog codec

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the setTag method. For more clarification, see the example.

These enumerated values should only be used when the photometric interpretation value is LogL or LogLUV. The BitsPerSample, SamplesPerPixel, and SampleFormat tags should not be set if the image type is LogL or LogLuv. The choice of SGILogDataFmt will set these tags automatically. The Float and Bits8 settings imply a SamplesPerPixel value of 3 for LogLUV images, but only 1 for LogL images.

Supported Values

Float	Single precision samples
Bits8	uint8 samples (read only)

This tag can be set only once per instance of a LogL/LogLuv Tiff image object instance.

Example:

```
tiffobj = Tiff('example.tif','r');
tiffobj.setDirectory(3); % image three is a LogLuv image
tiffobj.setTag('SGILogDataFmt', Tiff.SGILogDataFmt.Float);
imdata = tiffobj.read();
```

SubFileType

Specify type of image

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the setTag method. For more clarification, see the example.

`SubFileType` is a bitmask that indicates the type of the image.

Supported Values

`Default`	Default value for single image file or first image.
`ReducedImage`	The current image is a thumbnail or reduced-resolution image that typically would be found in a sub-IFD.
`Page`	The image is a single image of a multi-image (or multipage) file.
`Mask`	The image is a transparency mask for another image in the file. The photometric interpretation value must be Photometric.Mask.

Example:

```
tiffobj.setTag('SubFileType', Tiff.SubFileType.Mask);
```

TagID

List of recognized TIFF tag names with their ID numbers

This property identifies all the supported TIFF tags with their ID numbers.
Use this property to specify a tag when using the `setTag` method. For example, `Tiff.TagID.ImageWidth` returns the ID of the `ImageWidth` tag. To get a list of the names of supported tags, use the `getTagNames` method.

Example:

```
tiffobj.setTag(Tiff.TagID.ImageWidth, 300);
```

Thresholding

Specifies technique used to convert from gray to black and white pixels.

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the `setTag` method. For more clarification, see the example.

Supported Values

`BiLevel` (default)
`HalfTone`

`ErrorDiffuse`

Example:

```
tiffobj.setTag('Thresholding', Tiff.Thresholding.HalfTone);
```

`YCbCrPositioning`

Specify relative positioning of chrominance samples

This property defines all the supported values for this tag. You use this property to specify the value you want to assign to the tag, using the `setTag` method. For more clarification, see the example.

This property identifies all supported values for the `YCbCrPositioning` tag.

Supported Values

`Centered`	Specify for compatibility with industry standards such as PostScript Level 2
`Cosited`	Specify for compatibility with most digital video standards such as CCIR Recommendation 601-1.

Example:

```
tiffobj.setTag('YCbCrPositioning', Tiff.YCbCrPositioning.Centered);
```

Methods

close	Close Tiff object
computeStrip	Index number of strip containing specified coordinate
computeTile	Index number of tile containing specified coordinates
currentDirectory	Index of current IFD
getTag	Value of specified tag
getTagNames	List of recognized TIFF tags
getVersion	LibTIFF library version

isTiled	Determine if tiled image
lastDirectory	Determine if current IFD is last in file
nextDirectory	Make next IFD current IFD
numberOfStrips	Total number of strips in image
numberOfTiles	Total number of tiles in image
read	Read entire image
readEncodedStrip	Read data from specified strip
readEncodedTile	Read data from specified tile
readRGBAImage	Read image using RGBA interface
readRGBAStrip	Read strip data using RGBA interface
readRGBATile	Read tile data using RGBA interface
rewriteDirectory	Write modified metadata to existing IFD
setDirectory	Make specified IFD current IFD
setSubDirectory	Make subIFD specified by byte offset current IFD
setTag	Set value of tag
write	Write entire image
writeDirectory	Create new IFD and make it current IFD
writeEncodedStrip	Write data to specified strip
writeEncodedTile	Write data to specified tile

Examples

Create New TIFF File Using Tiff object

Create a new file called `myfile.tif`. To run this example, your directory must be writable.

```
t = Tiff('myfile.tif', 'w');
```

Close the Tiff object.

```
t.close();
```

Specify Tiff object properties and describe alpha channel

Create an array of data, `data`, that contains colormetric channels and an alpha channel.

```
rgb = imread('example.tif');
numrows = size(rgb,1);
numcols = size(rgb,2);
alpha = 255*ones([numrows numcols], 'uint8');
data = cat(3,rgb,alpha);
```

Create a `Tiff` object, `t`, and set the object properties. Set the value of the `ExtraSamples` tag because the data contains the alpha channel in addition to the colormetric channels.

```
t = Tiff('myfile.tif','w');
t.setTag('Photometric',Tiff.Photometric.RGB);
t.setTag('Compression',Tiff.Compression.None);
t.setTag('BitsPerSample',8);
t.setTag('SamplesPerPixel',4);
t.setTag('SampleFormat',Tiff.SampleFormat.UInt);
t.setTag('ExtraSamples',Tiff.ExtraSamples.Unspecified);
t.setTag('ImageLength',numrows);
t.setTag('ImageWidth',numcols);
t.setTag('TileLength',32);
t.setTag('TileWidth',32);
t.setTag('PlanarConfiguration',Tiff.PlanarConfiguration.Chunky);
```

Write the data to the `Tiff` object.

```
t.write(data);
t.close();
```

Create YCbCr/JPEG image from RGB data

Get RGB data.

```
rgb = imread('example.tif');
```

Create a `Tiff` object, `t`, and set the object properties. Specify RGB input data using the `JPEGColorMode` property.

```
t = Tiff('myfile.tif','w');
```

```
t.setTag('Photometric',Tiff.Photometric.YCbCr);
t.setTag('Compression',Tiff.Compression.JPEG);
t.setTag('YCbCrSubSampling',[2 2]);
t.setTag('BitsPerSample',8);
t.setTag('SamplesPerPixel',3);
t.setTag('SampleFormat',Tiff.SampleFormat.UInt);
t.setTag('ImageLength',size(rgb,1));
t.setTag('ImageWidth',size(rgb,2));
t.setTag('TileLength',32);
t.setTag('TileWidth',32);
t.setTag('PlanarConfiguration',Tiff.PlanarConfiguration.Chunky);
t.setTag('JPEGColorMode',Tiff.JPEGColorMode.RGB);
t.setTag('JPEGQuality',75);
```

Write the data to the `Tiff` object.

```
t.write(rgb);
t.close();
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

See Also

`imread` | `imwrite` | `imfinfo`

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

time

Convert time of calendar duration to duration

Syntax

```
t = time(d)
```

Description

`t = time(d)` returns the time components of the calendar duration values in `d` as durations. The `t` output is the same size as `d`.

Examples

Convert Time of Calendar Durations to Durations

Create an array of calendar durations.

```
d = caldays(8:10) + hours(1.2345)
```

```
d = 1×3 calendarDuration array
    8d 1h 14m 4.2s    9d 1h 14m 4.2s   10d 1h 14m 4.2s
```

Convert the time components of the array to durations.

```
t = time(d)
```

```
t = 1×3 duration array
   01:14:04   01:14:04   01:14:04
```

View the data type of `t`.

```
whos t
```

```
  Name      Size            Bytes  Class       Attributes
```

```
  t         1x3                40  duration
```

Input Arguments

d — Input calendar duration
scalar | vector | matrix | multidimensional array

Input calendar duration, specified as a scalar, vector, matrix, or multidimensional `calendarDuration` array.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also
`caldays` | `calmonths` | `calquarters` | `calweeks` | `calyears` | `duration`

Introduced in R2014b

timeofday

Elapsed time since midnight for datetimes

Syntax

```
d = timeofday(t)
```

Description

`d = timeofday(t)` returns an array of durations equal to the elapsed time since midnight for each of the `datetime` values in `t`. The output argument, `d`, is equal to the result of `t - dateshift(t,'start','day')`, and is the same size as `t`.

- If you have `datetime` values with no time zone, then `d` also is equal to

  ```
  e = hours(t.Hour) + minutes(t.Minute) + seconds(t.Second)
  ```

- If a `datetime` value has its `TimeZone` property set to a time zone that does not observe Daylight Saving Time (DST), then `d` is equal to `e`.
- If a `datetime` value has its `TimeZone` property set to a time zone that observes DST, then `timeofday` accounts for the DST shift on days when the shift occurs. On those days, for times after the DST shift occurs, `d` differs from `e` by the amount of the shift.

Examples

Calculate Times of Day

Create a `datetime` array. Calculate the elapsed time since midnight for each `datetime` value.

```
t = datetime('now') + hours(1:3)
```

```
t = 1×3 datetime array
   24-Feb-2017 14:10:38   24-Feb-2017 15:10:38   24-Feb-2017 16:10:38
```

```
d = timeofday(t)
```

```
d = 1×3 duration array
   14:10:38   15:10:38   16:10:38
```

List the data type of `d`. The `timeofday` function returns a `duration` array, not a `datetime` array.

```
whos d
```

```
  Name      Size            Bytes  Class       Attributes

  d         1x3                40  duration
```

Calculate Elapsed Times on DST Shift

Calculate elapsed times since midnight on a day with a Daylight Saving Time (DST) shift.

Create a `datetime` array. Set its `TimeZone` property to a time zone that observes DST. Set the date to a date when a DST shift occurred.

```
tz = 'America/New_York';
fmt = 'dd-MMM-yyyy HH:mm:ss z';
t = datetime(2015,3,8,'TimeZone',tz,'Format',fmt) + hours(1:4)
```

```
t = 1×4 datetime array
   08-Mar-2015 01:00:00 EST   08-Mar-2015 03:00:00 EDT   08-Mar-2015 04:00:00 EDT   08-
```

Calculate the elapsed times. The DST shift occurred at 02:00 on March 8, 2015 in this time zone. `timeofday` accounts for the shift for times at or after 02:00 on this date.

```
d = timeofday(t)
```

```
d = 1×4 duration array
   01:00:00   02:00:00   03:00:00   04:00:00
```

Set Times of Day for Datetimes

Set the times of day in a `datetime` array according to the times of day in another `datetime` array. There are two ways to set the times of day. Only the second method is correct across Daylight Saving Time (DST) shifts.

Create a `datetime` array. Each element has a different time component.

```
t1 = datetime(2015,3,7) + hours(1:4)
```

```
t1 = 1×4 datetime array
   07-Mar-2015 01:00:00   07-Mar-2015 02:00:00   07-Mar-2015 03:00:00   07-Mar-2015 04
```

Create a second `datetime` array. Each element has the same date and time components.

```
t2 = datetime(2015,3,[8 8 8 8])
```

```
t2 = 1×4 datetime array
   08-Mar-2015   08-Mar-2015   08-Mar-2015   08-Mar-2015
```

Set the times of day in `t2` according to the times of day in `t1`.

```
t2 = dateshift(t2,'start','day') + timeofday(t1)
```

```
t2 = 1×4 datetime array
   08-Mar-2015 01:00:00   08-Mar-2015 02:00:00   08-Mar-2015 03:00:00   08-Mar-2015 04
```

Create a `datetime` array with elements that have the `TimeZone` property set to `'America/New_York'`.

```
tz = 'America/New_York';
fmt = 'dd-MMM-yyyy HH:mm:ss z';
t3 = datetime(2015,3,8,'TimeZone',tz,'Format',fmt) + hours(1:4)
```

```
t3 = 1×4 datetime array
   08-Mar-2015 01:00:00 EST   08-Mar-2015 03:00:00 EDT   08-Mar-2015 04:00:00 EDT   08-
```

Calculate the elapsed time since midnight. `timeofday` accounts for the DST shift that occurred on March 8, 2015.

```
d = timeofday(t3)
```

```
d = 1×4 duration array
   01:00:00   02:00:00   03:00:00   04:00:00
```

Set the times of day in `t4` according to times of day in `t1`. To set the times of day correctly regardless of the time zone or the day of year, use the `Hour`, `Minute`, and `Second` properties of `t1`.

```
t4 = datetime(2015,3,[8 8 8 8],'TimeZone',tz,'Format',fmt);
t4.Hour = t1.Hour;
t4.Minute = t1.Minute;
t4.Second = t1.Second;
t4
```

```
t4 = 1×4 datetime array
   08-Mar-2015 01:00:00 EST   08-Mar-2015 03:00:00 EDT   08-Mar-2015 03:00:00 EDT   08-
```

In this time zone 2:00 a.m. Eastern Standard Time did not exist on March 8, 2015, because the DST shift occurred then. The second element of the result has a time component of 3:00 a.m. Eastern Daylight Time.

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`dateshift` | `duration` | `hms` | `hour` | `minute` | `second`

Introduced in R2014b

timer class

Create object to schedule execution of MATLAB commands

Description

Use a `timer` object to schedule the execution of MATLAB commands one or multiple times. If you schedule the timer to execute multiple times, you can define the time between executions and how to handle queuing conflicts.

The `timer` object uses callback functions to execute commands. Callback functions execute code during some event. For the `timer` object, you can specify the callback function as a function handle or as a character vector. If the callback function is a character vector, MATLAB evaluates it as executable code. The timer object supports callback functions when a timer starts (`StartFcn`), executes (`TimerFcn`), stops (`StopFcn`), or encounters an error (`ErrorFcn`).

Note: The `timer` object is subject to the limitations of your hardware, operating system, and software. Avoid using timer objects for real-time applications.

Construction

`t = timer` creates an empty `timer` object to schedule execution of MATLAB commands. An error occurs if the timer starts and `TimerFcn` is not defined.

`t = timer(Name,Value)` creates a `timer` object with additional options that you specify using one or more `Name,Value` pair arguments.

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The argument name, `Name`, corresponds to a `timer` property name. In the constructor, the property values are specified using `Name,Value` pair arguments.

`'BusyMode'`

Character vector that indicates action taken when a timer has to execute `TimerFcn` before the completion of previous execution of the `TimerFcn`. When `Running='on'`, `BusyMode` is read only. This table summarizes the busy modes.

BusyMode Values	Behavior if Queue Empty	Behavior if Queue Not Empty	Notes
`'drop'`	Adds task to queue	Drops task	Possible skipping of `TimerFcn` calls
`'error'`	Adds task to queue	Completes task; throws error specified by `ErrorFcn`; stops timer	Stops timer after completing task in execution queue
`'queue'`	Adds task to queue	Waits for queue to clear, and then enters task in queue	Adjusts `Period` property to manage tasks in execution queue

See "Handling Timer Queuing Conflicts" for more information.

Default: `'drop'`

`'ErrorFcn'`

Character vector, function handle, or cell array defining the function that the timer executes when an error occurs. If there is an error, this function executes, and then calls `StopFcn`.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function.

The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.

- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see “Timer Callback Functions”.

`'ExecutionMode'`

Character vector that defines how the `timer` object schedules timer events. When `Running='on'`, `ExecutionMode` is read only. This table summarizes the execution modes.

Execution Mode	Time `Period` Start Point
`'singleShot'`	In this mode, the timer callback function is only executed once. Therefore, the `Period` property has no effect. This is the default execution mode.
`'fixedRate'`	Starts immediately after the timer callback function is added to the MATLAB execution queue
`'fixedDelay'`	Starts when the timer function callback restarts execution after a time lag due to delays in the MATLAB execution queue
`'fixedSpacing'`	Starts when the timer callback function finishes executing.

- `'singleShot'` is the single execution mode for the `timer` class, and is the default value.

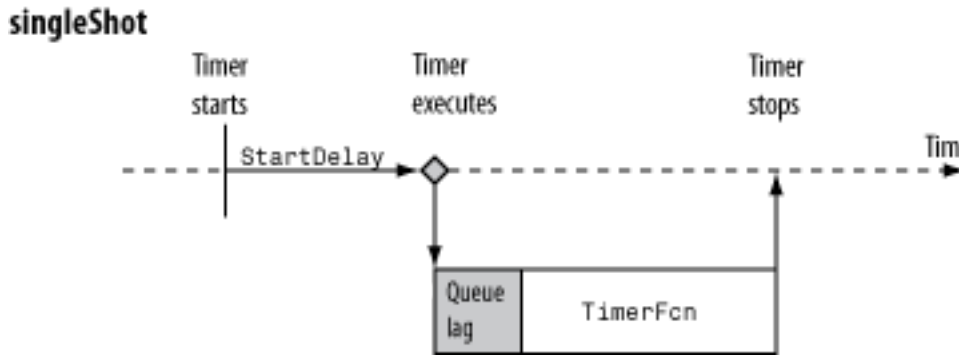

- `'fixedDelay'`, `'fixedRate'`, and `'fixedSpacing'` are the three supported multiexecution modes. These modes define the starting point of the `Period` property. The `Period` property specifies the amount of time between executions, which remains the same. Only the point at which execution begins is different.

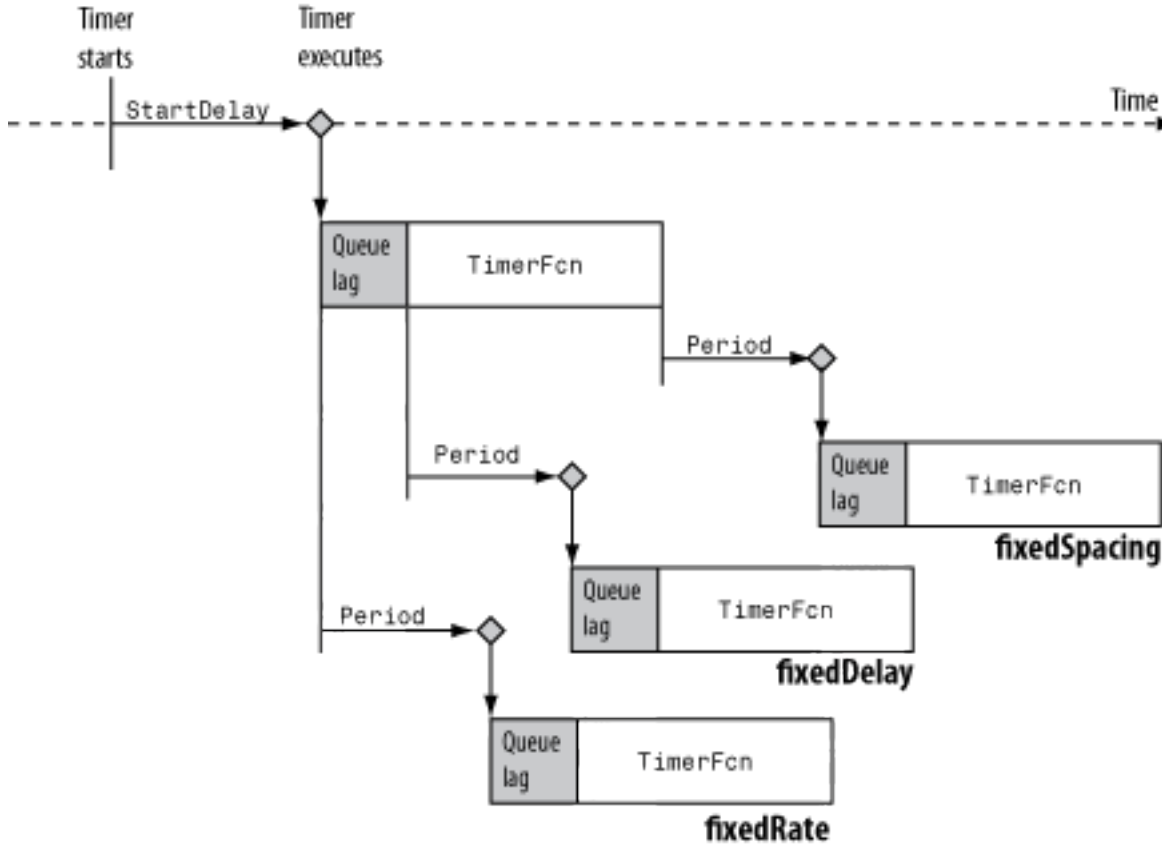

Default: `'singleShot'`

`'Name'`

Character vector representing the `timer` name.

Default: `'timer-i'`, where *`i`* is a number indicating the *`i`*th timer object created this session. To reset *`i`* to 1, execute the `clear classes` command.

'ObjectVisibility'

Character vector with possible values of `'on'` or `'off'`, that provides a way for you to discourage end-user access to the timer objects your application creates. The `timerfind` function does not return an object whose `ObjectVisibility` property is set to `'off'`. Objects that are not visible are still valid. To retrieve a list of all the timer objects in memory, including the invisible ones, use the `timerfindall` function.

Default: `'on'`

'Period'

Number greater than 0.001 that specifies the delay, in seconds, between executions of `TimerFcn`. For the timer to use `Period`, you must set `ExecutionMode` and `TasksToExecute` to schedule multiple timer object callback events.

Default: 1.0

'StartDelay'

Number greater than or equal to 0 that specifies the delay, in seconds, between the start of the timer and the first execution of the function specified in `TimerFcn`. When `Running = 'on'`, `StartDelay` is read only.

Default: 0

'StartFcn'

Character vector, function handle, or cell array defining the function that executes when the timer starts.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see “Timer Callback Functions”.

`'StopFcn'`

Character vector, function handle, or cell array defining the function that executes when the timer stops.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see “Timer Callback Functions”.

The timer stops when

- You call the timer `stop` method.
- The timer finishes executing `TimerFcn`. In other words, the value of `TasksExecuted` reaches the limit set by `TasksToExecute`.
- An error occurs. The `ErrorFcn` callback is called first, followed by the `StopFcn` callback.

You can use `StopFcn` to define clean up actions, such as deleting the timer object from memory.

`'Tag'`

Character vector that represents a label for the object.

`'TasksToExecute'`

Number greater than 0, indicating the number of times the timer object is to execute the `TimerFcn` callback. Use the `TasksToExecute` property to set the number of executions. To use `TasksToExecute`, you must set `ExecutionMode` to schedule multiple timer callback events.

Default: `Inf`

`'TimerFcn'`

Character vector, function handle, or cell array defining the timer callback function. You must define this property before you can start the timer.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see "Timer Callback Functions".

`'UserData'`

Generic field for data that you want to add to the object.

Properties

`AveragePeriod`

Average time in seconds between `TimerFcn` executions since the timer started. Value is `NaN` until timer executes two timer callbacks.

`InstantPeriod`

The time in seconds between the last two executions of `TimerFcn`. Value is `NaN` until timer executes two timer callbacks.

`Running`

Character vector defined as `'off'` or `'on'`, indicating whether the timer is currently executing callback functions.

TasksExecuted

The number of times the timer called `TimerFcn` since the timer started.

Type

Character vector that identifies the object type.

Methods

delete	Remove timer object from memory
get	Query property values for timer object
isvalid	Determine timer object validity
set	Set property values for timer object
start	Start timer object
startat	Schedule timer to fire at specified time
stop	Stop timer object
timerfind	Find timer object
timerfindall	Find timer object, regardless of visibility
wait	Block command prompt until timer stops running

Copy Semantics

Handle. To learn how handle classes affect copy operations, see Copying Objects in the MATLAB documentation.

Examples

Display Message Using Timer

Display a message using an anonymous function as a callback function. It is important to note that the first two arguments the callback function passes are a handle to the

timer object and an event structure. Even if the function doesn't use these arguments, the function definition requires them.

Wait 3 seconds, and then display the message '3 seconds have elapsed'.

```
t = timer;
t.StartDelay = 3;
t.TimerFcn = @(myTimerObj, thisEvent)disp('3 seconds have elapsed');
start(t)
```

```
3 seconds have elapsed
```

Suppose the function does not require the timer or event object. Use the tilde (~) operator to ignore the inputs.

```
t.TimerFcn = @(~,~) disp('3 seconds have elapsed');
start(t)
```

```
3 seconds have elapsed
```

Delete the timer object.

```
delete(t)
```

Execute Callback Function Multiple Times

Display the event and date/time output when the timer starts, fires, and stops. The timer callback function will be executed 3 times with 2 seconds between calls. The first two arguments the callback function passes are a handle to the timer object and an event structure. The event structure contains two fields: `Type` is a character vector that identifies the type of event that caused the callback, and `Data` is a structure that contains a date time vector of when the event occurred.

```
t = timer;
t.StartFcn = @(~,thisEvent)disp([thisEvent.Type ' executed '...
    datestr(thisEvent.Data.time,'dd-mmm-yyyy HH:MM:SS.FFF')]);
t.TimerFcn = @(~,thisEvent)disp([thisEvent.Type ' executed '...
     datestr(thisEvent.Data.time,'dd-mmm-yyyy HH:MM:SS.FFF')]);
t.StopFcn = @(~,thisEvent)disp([thisEvent.Type ' executed '...
    datestr(thisEvent.Data.time,'dd-mmm-yyyy HH:MM:SS.FFF')]);
t.Period = 2;
t.TasksToExecute = 3;
t.ExecutionMode = 'fixedRate';
start(t)
```

```
StartFcn executed 14-Mar-2013 09:08:50.865
TimerFcn executed 14-Mar-2013 09:08:50.865
TimerFcn executed 14-Mar-2013 09:08:52.865
TimerFcn executed 14-Mar-2013 09:08:54.866
StopFcn executed 14-Mar-2013 09:08:54.869
```

Delete the timer object.

```
delete(t)
```

Define Custom Callback Functions

Create a timer object to remind yourself to take 30-second ergonomic breaks every 10 minutes over the course of 8 hours.

Create a function in a file named `createErgoTimer.m` that returns a timer object. Have this file include three local functions to handle timer start, execute, and stop tasks.

```
function t = createErgoTimer()
secondsBreak = 30;
secondsBreakInterval = 600;
secondsPerHour = 60^2;
secondsWorkTime = 8*secondsPerHour;

t = timer;
t.UserData = secondsBreak;
t.StartFcn = @ergoTimerStart;
t.TimerFcn = @takeBreak;
t.StopFcn = @ergoTimerCleanup;
t.Period = secondsBreakInterval+secondsBreak;
t.StartDelay = t.Period-secondsBreak;
t.TasksToExecute = ceil(secondsWorkTime/t.Period);
t.ExecutionMode = 'fixedSpacing';
end
```

Using `StartDelay` allows the timer to start without directing you to take a break immediately. Set the execution mode to `'fixedSpacing'` so that `10` minutes and `30` seconds (`t.Period`) elapses after the completion of a `TimerFcn` execution. This allows you to stretch for `30` seconds before the start of the next `10` minute interval.

In the `createErgoTimer.m` file, add a local function to handle the tasks associated with starting the timer. By default, the `timer` object passes itself and event data to the callback function. The function disregards the event data.

```
function ergoTimerStart(mTimer,~)
secondsPerMinute = 60;
secondsPerHour = 60*secondsPerMinute;
str1 = 'Starting Ergonomic Break Timer.  ';
str2 = sprintf('For the next %d hours you will be notified',...
    round(mTimer.TasksToExecute*(mTimer.Period + ...
    mTimer.UserData)/secondsPerHour));
str3 = sprintf(' to take a %d second break every %d minutes.',...
    mTimer.UserData, (mTimer.Period - ...
    mTimer.UserData)/secondsPerMinute);
disp([str1 str2 str3])
end
```

Add a local function to handle the tasks associated with executing the timer. The `TimerFcn` callback should tell you to take a 30 second break.

```
function takeBreak(mTimer,~)
disp('Take a 30 second break.')
end
```

Add a local function to handle the tasks associated with stopping the timer.

```
function ergoTimerCleanup(mTimer,~)
disp('Stopping Ergonomic Break Timer.')
delete(mTimer)
end
```

Deleting the timer object removes it from memory.

From the command line, call the `createErgoTimer` function to create and start a timer.

```
t = createErgoTimer;
start(t)
```

```
Starting Ergonomic Break Timer.  For the next 8 hours you will be notified to take a 30
```

Every 10 minutes, you will be reminded to take a 30 second break.

```
Take a break.
```

You can leave the timer running for 8 hours or stop it manually. Recall that you included the task of deleting the timer from memory in the `StopFcn` callback.

```
stop(t)
```

```
Stopping Ergonomic Break Timer.
```

Tips

- To force the execution of the callback functions in the event queue, include a call to the `drawnow` function in your code. The `drawnow` function flushes the event queue.

See Also

Topics

Timer Callback Functions
"Handling Timer Queuing Conflicts"
"Ignore Function Outputs"
"Create Function Handle"
Property Attributes

Introduced before R2006a

delete

Class: timer

Remove timer object from memory

Syntax

```
delete(t)
```

Description

`delete(t)` removes the timer object, `t`, from memory. If `t` is an array of timer objects, `delete` removes all the objects from memory.

When you delete a timer object, it becomes invalid and you cannot reuse it. If multiple references to a timer object exist in the workspace, deleting the timer object invalidates the remaining references. To remove invalid timer objects references from the workspace, use the `clear` command.

Input Arguments

t

Object of class timer.

Examples

Delete a Timer

Create and start a timer that generates a 10-by-10 array of random numbers.

```
t = timer('TimerFcn','rand(10);');
start(t)
```

Delete the timer from memory.

```
delete(t)
```

Call the `whos` function to see if a reference still exists in the workspace.

```
whos
```

```
  Name       Size            Bytes  Class     Attributes

  ans       10x10              800  double
  t          1x1               104  timer
```

Try to restart the timer.

```
start(t)
```

```
Error using timer/start (line 27)
Invalid timer object. This object has been deleted and should be removed from your work
```

The timer cannot be restarted.

Clear the timer object reference from the workspace.

```
clear t
```

Delete Multiple Timers Using timerfind

Use `delete` with the `timerfind` method to remove all visible timers from memory. This is an alternative to deleting individual timers by variable name.

Create and start three timers that compute the sine, cosine and tangent of `pi/4`.

```
t1 = timer('TimerFcn','sin(pi/4);');
t2 = timer('TimerFcn','cos(pi/4);');
t3 = timer('TimerFcn','tan(pi/4);');
```

Delete the timers from memory using `timerfind`. This removes all visible timer objects from memory.

```
delete(timerfind)
```

Tips

- Use the isvalid method to determine if a timer object exists in memory, but is not cleared from the workspace.

- Use the timerfind and timerfindall methods to return timer objects currently existing in memory. This approach is useful if the reference to the timer object is cleared from the workspace (using the `clear` command), but not deleted from memory.

See Also

See Also

timer | isvalid | timerfind | timerfindall

Introduced before R2006a

get

Class: timer

Query property values for timer object

Syntax

```
get(t)
V = get(t)
V = get(t,propName)
```

Description

`get(t)` queries property values for timer object, `t`, and displays all property names and current values. `t` must be a scalar timer object.

`V = get(t)` queries property values for timer object, `t` and returns a structure, `V`, where each field name is the name of a property of `t` and each field contains the value of that property. If `t` is an M-by-1 vector of timer objects, `V` is an M-by-1 array of structures.

`V = get(t,propName)` returns the value, `V`, of the timer object property specified in `propName`. If `propNames` is a vector cell array of N property names, and `t` is a vector of M timer objects, `v` is an M-by-N cell array of property values.

Input Arguments

`t`

Object of class timer.

`propName`

Character vector enclosed in single quotation marks that specifies a timer property.

Examples

Display All Properties of Timer

```
t = timer;
get(t)
```

```
       AveragePeriod: NaN
            BusyMode: 'drop'
            ErrorFcn: ''
       ExecutionMode: 'singleShot'
       InstantPeriod: NaN
                Name: 'timer-1'
    ObjectVisibility: 'on'
              Period: 1
             Running: 'off'
          StartDelay: 0
            StartFcn: ''
             StopFcn: ''
                 Tag: ''
       TasksExecuted: 0
      TasksToExecute: Inf
            TimerFcn: ''
                Type: 'timer'
            UserData: []
```

Delete the timer from memory.

```
delete(t)
```

Obtain Properties for Array of Timers

Create three timers.

```
t1 = timer;
t2 = timer;
t3 = timer;
```

Get properties of an array of timers.

```
V = get([t1,t2,t3])
```

```
V = 3×1 struct array with fields:
    AveragePeriod
```

```
    BusyMode
    ErrorFcn
    ExecutionMode
    InstantPeriod
    Name
    ObjectVisibility
    Period
    Running
    StartDelay
    StartFcn
    StopFcn
    Tag
    TasksExecuted
    TasksToExecute
    TimerFcn
    Type
    UserData
```

Delete the timers from memory.

```
delete([t1,t2,t3])
```

Obtain Single Property for Timer

Create a timer and determine if it is running.

```
t = timer;
get(t,'Running')
```

```
ans =
'off'
```

Delete the timer from memory.

```
delete(t)
```

Obtain Specified Properties for Array of Timers

Create three timers.

```
t1 = timer;
t2 = timer;
t3 = timer;
```

Obtain name, period, and running property values from the array of timers.

```
V = get([t1,t2,t3],{'Name','Running','Period'})
```

```
V = 3×3 cell array
    'timer-1'    'off'    [1]
    'timer-2'    'off'    [1]
    'timer-3'    'off'    [1]
```

Delete the timers

```
delete([t1,t2,t3])
```

Alternatives

You can also use dot notation can also be used to query timer object properties. For example, `t.Running` returns the same value as `get(t,'Running')`.

See Also

See Also

timer | set

Introduced before R2006a

isvalid

Class: timer

Determine timer object validity

Syntax

```
validCheck = isvalid(t)
```

Description

`validCheck = isvalid(t)` determines timer object validity and returns a logical array, `validCheck`, that contains a `0` where the elements of `t` are invalid timer objects and a `1` where the elements of `t` are valid timer objects.

An invalid timer object is an object that is deleted from memory using `delete` and cannot be reused. Use the `clear` command to remove an invalid timer object from the workspace.

Input Arguments

`t`

Object or array of objects of class timer

Examples

Check Timer Object Validity

Create a timer object. While this timer object is valid, it cannot start because a `TimerFcn` is not defined.

```
t = timer;
out = isvalid(t)
```

```
out =

     1
```

Delete the timer object, making it invalid.

```
delete(t)
out1 = isvalid(t)
```

```
out1 =

     0
```

Tips

- To return timer objects existing in memory, use the timerfind and timerfindall methods. This practice is useful if the reference to the timer object is cleared from the workspace (using the `clear` function), but the object has not been deleted from memory.

See Also

See Also

timer | delete | timerfind | timerfindall

Introduced before R2006a

set

Class: timer

Set property values for timer object

Syntax

```
set(t)
propStruct = set(t)

set(t,Name)
propCell = set(t,Name)

set(t,Name,Value)
set(t,S)
set(t,PN,PV)
```

Description

`set(t)` displays the property names and their possible values for all configurable properties of timer object `t`.

`propStruct = set(t)` returns the values in a `struct`.

`set(t,Name)` displays the possible values for the specified property, `Name`, of timer object, `t`.

`propCell = set(t,Name)` returns the values in a cell.

`set(t,Name,Value)` sets the properties specified by one or more `Name,Value` pair arguments. `t` can be a single timer object or a vector of timer objects, in which case `set` configures the property values for all timer objects, `t`.

`set(t,S)` configures the properties of `t`, with the values specified in `S`, where `S` is a structure whose field names are object property names.

`set(t,PN,PV)` configures the properties specified in the cell array of character vectors, `PN`, to the corresponding values in the cell array `PV`, for the timer object `t`.

Input Arguments

t

Object of class timer.

S

Structure whose field names are timer property names.

PN,PV

Cell array of character vectors, PN, and corresponding cell array of values, PV. The cell array of PN must be a 1-by-N or N-by-1 array. If t is an array of timer objects, PV can be an M-by-N cell array, where M is equal to the length of t and N is equal to the length of PN. In this case, each timer object is updated with a different set of values for the list of property names contained in PN.

Name-Value Pair Arguments

Specify optional comma-separated pairs of Name,Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside single quotes (' '). You can specify several name and value pair arguments in any order as Name1,Value1,...,NameN,ValueN.

'BusyMode'

Character vector that indicates action taken when a timer has to execute TimerFcn before the completion of previous execution of the TimerFcn. When Running='on', BusyMode is read only. This table summarizes the busy modes.

BusyMode Values	Behavior if Queue Empty	Behavior if Queue Not Empty	Notes
'drop'	Adds task to queue	Drops task	Possible skipping of TimerFcn calls
'error'	Adds task to queue	Completes task; throws error specified by ErrorFcn; stops timer	Stops timer after completing task in execution queue

BusyMode Values	Behavior if Queue Empty	Behavior if Queue Not Empty	Notes
`'queue'`	Adds task to queue	Waits for queue to clear, and then enters task in queue	Adjusts `Period` property to manage tasks in execution queue

See “Handling Timer Queuing Conflicts” for more information.

Default: `'drop'`

`'ErrorFcn'`

Character vector, function handle, or cell array defining the function that the timer executes when an error occurs. If there is an error, this function executes, and then calls `StopFcn`.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see “Timer Callback Functions”.

`'ExecutionMode'`

Character vector that defines how the `timer` object schedules timer events. When `Running='on'`, `ExecutionMode` is read only. This table summarizes the execution modes.

Execution Mode	Time `Period` Start Point
`'singleShot'`	In this mode, the timer callback function is only executed once. Therefore, the `Period` property has no effect. This is the default execution mode.

Execution Mode	Time `Period` Start Point
`'fixedRate'`	Starts immediately after the timer callback function is added to the MATLAB execution queue
`'fixedDelay'`	Starts when the timer function callback restarts execution after a time lag due to delays in the MATLAB execution queue
`'fixedSpacing'`	Starts when the timer callback function finishes executing.

- `'singleShot'` is the single execution mode for the `timer` class, and is the default value.

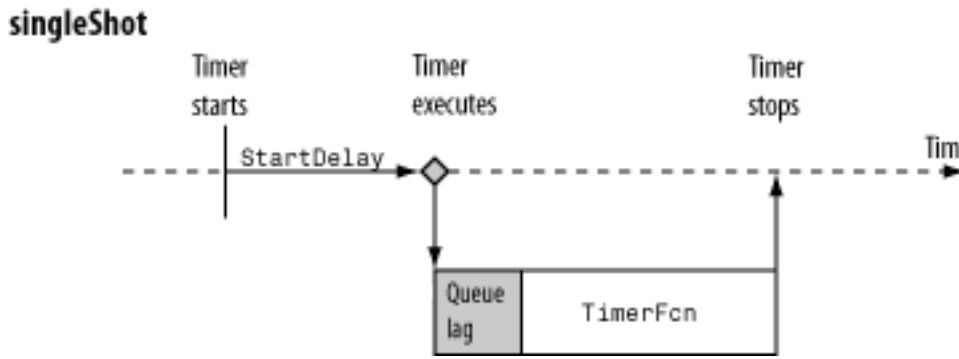

- `'fixedDelay'`, `'fixedRate'`, and `'fixedSpacing'` are the three supported multiexecution modes. These modes define the starting point of the `Period` property. The `Period` property specifies the amount of time between executions, which remains the same. Only the point at which execution begins is different.

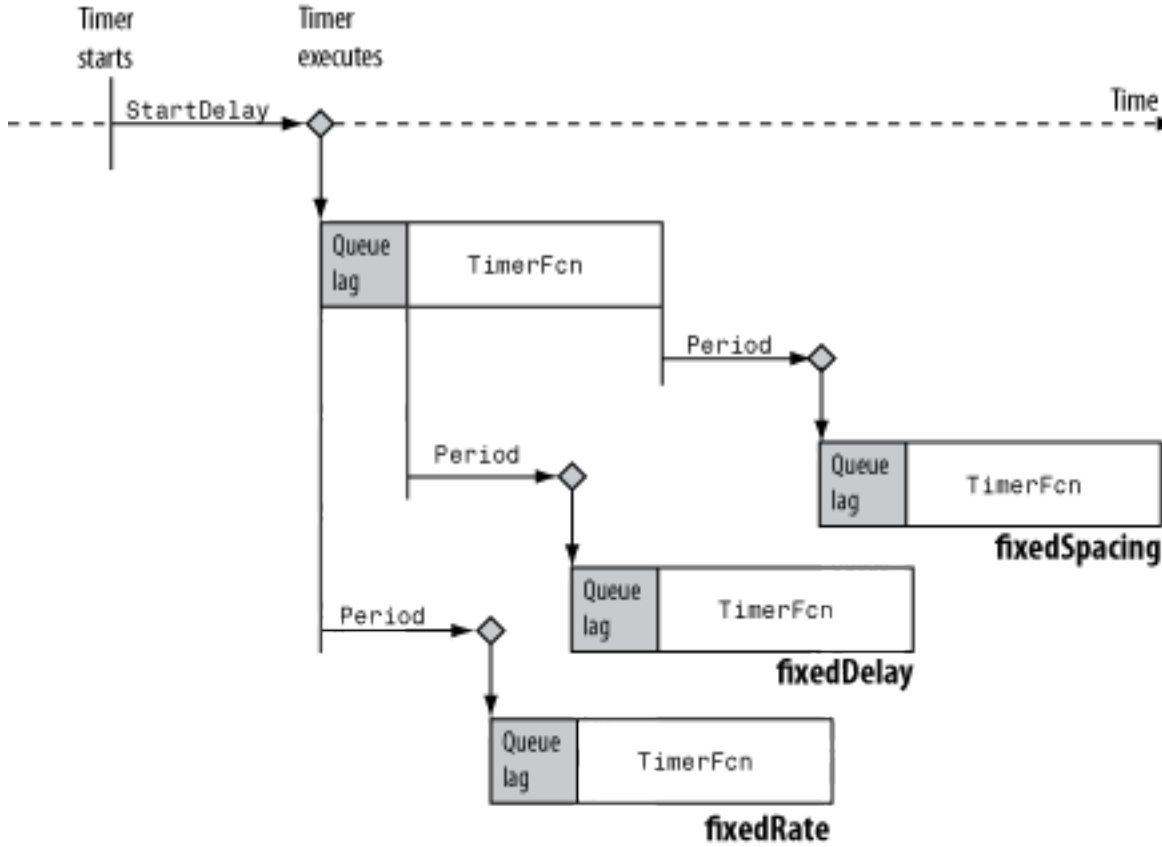

Default: `'singleShot'`

`'Name'`

Character vector representing the `timer` name.

Default: `'timer-i'`, where *`i`* is a number indicating the *`i`*th timer object created this session. To reset *`i`* to 1, execute the `clear classes` command.

`'ObjectVisibility'`

Character vector with possible values of `'on'` or `'off'`, that provides a way for you to discourage end-user access to the timer objects your application creates. The `timerfind`

function does not return an object whose `ObjectVisibility` property is set to `'off'`. Objects that are not visible are still valid. To retrieve a list of all the timer objects in memory, including the invisible ones, use the `timerfindall` function.

Default: `'on'`

`'Period'`

Number greater than 0.001 that specifies the delay, in seconds, between executions of `TimerFcn`. For the timer to use `Period`, you must set `ExecutionMode` and `TasksToExecute` to schedule multiple timer object callback events.

Default: 1.0

`'StartDelay'`

Number greater than or equal to 0 that specifies the delay, in seconds, between the start of the timer and the first execution of the function specified in `TimerFcn`. When `Running = 'on'`, `StartDelay` is read only.

Default: 0

`'StartFcn'`

Character vector, function handle, or cell array defining the function that executes when the timer starts.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see “Timer Callback Functions”.

`'StopFcn'`

Character vector, function handle, or cell array defining the function that executes when the timer stops.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see "Timer Callback Functions".

The timer stops when

- You call the timer `stop` method.
- The timer finishes executing `TimerFcn`. In other words, the value of `TasksExecuted` reaches the limit set by `TasksToExecute`.
- An error occurs. The `ErrorFcn` callback is called first, followed by the `StopFcn` callback.

You can use `StopFcn` to define clean up actions, such as deleting the timer object from memory.

`'Tag'`

Character vector that represents a label for the object.

`'TasksToExecute'`

Number greater than 0, indicating the number of times the timer object is to execute the `TimerFcn` callback. Use the `TasksToExecute` property to set the number of executions. To use `TasksToExecute`, you must set `ExecutionMode` to schedule multiple timer callback events.

Default: `Inf`

`'TimerFcn'`

Character vector, function handle, or cell array defining the timer callback function. You must define this property before you can start the timer.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see "Timer Callback Functions".

`'UserData'`

Generic field for data that you want to add to the object.

Output Arguments

`propStruct`

Configurable properties of `t`, returned as a structure. The field names of `propStruct` are the property names of `t`, and the associated values of `propStruct` are cell arrays of the possible property values. If the property in `t` does not have a finite set of possible values, the property value in `propStruct` is an empty cell array.

`propCell`

Possible values of a given property name, returned as cell array of character vectors. If the property does not have a finite set of possible values, `set` returns an empty cell array.

Examples

Display Configurable Timer Object Properties

Instantiate a timer object and call the `set` method.

```
t = timer;
set(t)
```

```
    BusyMode: [ {drop} | queue | error ]
    ErrorFcn: string -or- function handle -or- cell array
    ExecutionMode: [ {singleShot} | fixedSpacing | fixedDelay | fixedRate ]
    Name
    ObjectVisibility: [ {on} | off ]
    Period
    StartDelay
    StartFcn: string -or- function handle -or- cell array
    StopFcn: string -or- function handle -or- cell array
    Tag
    TasksToExecute
    TimerFcn: string -or- function handle -or- cell array
    UserData
```

Some of the timer properties, such as `Running`, are not displayed because they are read only.

Use the `set` method to output a structure.

```
out = set(t)
```

```
out = struct with fields:
            BusyMode: {3×1 cell}
            ErrorFcn: {}
       ExecutionMode: {4×1 cell}
                Name: {}
    ObjectVisibility: {2×1 cell}
              Period: {}
          StartDelay: {}
            StartFcn: {}
             StopFcn: {}
                 Tag: {}
      TasksToExecute: {}
            TimerFcn: {}
            UserData: {}
```

Delete the timer object from memory.

```
delete(t)
```

Display Possible Property Values

Instantiate a timer object and display possible values for the `BusyMode` property.

```
t = timer;
set(t,'BusyMode')
```

```
[ {drop} | queue | error ]
```

The output shows the three possible values for `BusyMode`. The default value, `drop`, is indicated by curly braces.

Display the possible values for `ErrorFcn`.

```
set(t,'ErrorFcn')
```

```
character vector -or- function handle -or- cell array
```

A description of the possible values is displayed since `ErrorFcn` does not have a set list of possible values.

Output the possible property values.

```
out1 = set(t,'BusyMode')
```

```
out1 = 3×1 cell array
    'drop'
    'queue'
    'error'


out2 = set(t,'ErrorFcn')
```

```
out2 =

  0×0 empty cell array
```

While `set(t,'ErrorFcn')` displays a description of the possible values, `out2 = set(t,'ErrorFcn')` returns an empty cell.

Delete the timer from memory.

```
delete(t)
```

Set Timer Object Property

Instantiate a timer object and make the object invisible. Display the objects's visibility and delete the object.

```
t = timer;
```

```
set(t,'ObjectVisibility','off')
get(t,'ObjectVisibility')
```

```
ans =
'off'
```

```
delete(t)
```

Set Timer Object Properties Using Structure

Construct a structure to modify several timer object properties.

```
s.BusyMode = 'queue';
s.ExecutionMode = 'fixedDelay';
s.ObjectVisibility = 'off'
```

```
s = struct with fields:
            BusyMode: 'queue'
       ExecutionMode: 'fixedDelay'
    ObjectVisibility: 'off'
```

Create a timer, display the properties in `s`, modify the timer, display the new values of the properties, and delete the timer.

```
t = timer;
get(t,{'BusyMode','ExecutionMode','ObjectVisibility'})
```

```
ans = 1×3 cell array
    'drop'    'singleShot'    'on'
```

```
set(t,s)
get(t,{'BusyMode','ExecutionMode','ObjectVisibility'})
```

```
ans = 1×3 cell array
    'queue'    'fixedDelay'    'off'
```

```
delete(t)
```

Set Timer Objects Using Cell Arrays

Create a cell array of properties to modify, and a cell array of the values of the corresponding properties. Instantiate a timer, and display the initial values of the properties in the property name cell array, `nameArr`.

```
nameArr = {'BusyMode','ExecutionMode','Period'};
valArr = {'queue','fixedDelay',3};
t = timer;
get(t,nameArr)
```

```
ans = 1×3 cell array
    'drop'    'singleShot'    [1]
```

Modify the timer object and display the new property values. Delete the timer.

```
set(t,nameArr,valArr)
get(t,nameArr)
```

```
ans = 1×3 cell array
    'queue'    'fixedDelay'    [3]
```

```
delete(t)
```

Instantiate an array of three timers. Create a new property name cell array to modify the `BusyMode`, `ExecutionMode`, and `UserData` properties. Display the initial values of the properties for each timer.

```
tArr = [timer timer timer];
nameArr = {'BusyMode','ExecutionMode','UserData'};
get(tArr,nameArr)
```

```
ans = 3×3 cell array
    'drop'    'singleShot'    []
    'drop'    'singleShot'    []
    'drop'    'singleShot'    []
```

Assign each property a different value in each timer. Create a cell array containing the new values. Each row indicates the values for the properties in the corresponding timer.

```
valArr = {'queue','fixedDelay',3;...
            'error','fixedSpacing',42;...
            'drop','fixedRate','hello'};
```

Modify the timer object properties and display the updated values.

```
set(tArr,nameArr,valArr)
get(tArr,nameArr)
```

```
ans = 3×3 cell array
    'queue'    'fixedDelay'      [    3]
    'error'    'fixedSpacing'    [   42]
    'drop'     'fixedRate'       'hello'
```

Delete the timers from memory.

```
delete(tArr)
```

Alternatives

You can also use dot notation to set timer object properties. For example, `t.ObjectVisibility = 'off'` sets the property to the same value as `set(t,'ObjectVisibility','off')`.

See Also

See Also

timer | get

Introduced before R2006a

start

Class: timer

Start timer object

Syntax

```
start(t)
```

Description

`start(t)` starts the timer object, `t`. If `t` is an array of timer objects, `start` starts all the timers.

The `start` method sets the `Running` property of the timer object to `'on'`, executes the `StartFcn` callback, and initiates `TimerFcn` callback .

Input Arguments

t

Object of class timer.

Examples

Start Timer

Create and start a timer that displays the message 'timer started.' as the `StartFcn` callback and generates a random number as the `TimerFcn` callback. Delete the timer.

```
t = timer('StartFcn',@(~,~)disp('timer started.'),'TimerFcn',@(~,~)disp(rand(1)));
start(t)
delete(t)
```

```
timer started.
```

```
0.9706
```

Your output from `rand` will vary.

Start Several Timers

Create and start three timers that displays a message for the `StartFcn` callbacks and compute the sine, cosine, and tangent of `pi/4` as the `TimerFcn` callbacks. Delete the timers.

```
t1 = timer('StartFcn',@(~,~)disp('t1 started.'),'TimerFcn',@(~,~)sin(pi/4));
t2 = timer('StartFcn',@(~,~)disp('t2 started.'),'TimerFcn',@(~,~)cos(pi/4));
t3 = timer('StartFcn',@(~,~)disp('t3 started.'),'TimerFcn',@(~,~)tan(pi/4));
start([t1 t2 t3]);
delete([t1 t2 t3]);
```

```
t1 started.
t2 started.
t3 started.
```

See Also

See Also

timer | delete | startat | stop

Introduced before R2006a

startat

Class: timer

Schedule timer to fire at specified time

Syntax

```
startat(t,firingTime)
startat(t,Y,M,D)
startat(t,Y,M,D,H,MI,S)
```

Description

`startat(t,firingTime)` schedules timer, `t`, to fire at specified time, `firingTime`. A timer fires by executing the callback function, `timerFcn`. `firingTime` must be within 25 days of the current time.

- If `t` is an array of timer objects and `firingTime` is a scalar, `startat` sets all the timers to fire at the specified time.
- If `t` is an array of timer objects and `firingTime` is an array of the same size as `t`, `startat` sets each timer to fire at the corresponding time.

`startat(t,Y,M,D)` starts the timer and schedules execution of `TimerFcn` at the year (`Y`), month (`M`), and day (`D`) specified.

`startat(t,Y,M,D,H,MI,S)` also specifies the hour (`H`), minute (`MI`), and second (`S`) specified.

Input Arguments

t

Object of class timer.

firingTime

Time at which the timer object is to fire, specified as a serial date number, character representation of date format, or a date vector. `firingTime` can be a single date or an array of dates with the same number of rows as timer objects in `t`.

- A serial date number indicates the number of days that have elapsed since 1-Jan-0000 (starting at 1). See `datenum` for additional information about serial date numbers.
- To specify character representation of dates, use the following date formats defined by the `datestr` function: 0, 1, 2, 6, 13, 14, 15, 16, or 23. These numeric identifiers correspond to formats defined by the `formatOut` property of the `datestr` function. Dates with two-character years are interpreted to be within the 100 years centered on the current year.
- Date vectors are specified as an `m-by-6` or `m-by-3` matrix containing `m` full or partial date vectors, respectively. A full date vector has six elements indicating year, month, day, hour, minute, and second, in that order. A partial date vector has three elements indicating year, month, and day, in that order.

Y,M,D

Time at which the timer object is to fire, specified as numbers indicating the year (`Y`), month (`M`), and day (`D`). Month values less than 1 are set to 1; other arguments can wrap and have negative values.

Y,M,D,H,MI,S

Time at which the timer object is to fire, specified as numbers indicating the year (`Y`), month (`M`), day (`D`), hour (`H`), minute (`MI`), and second (`S`) specified. Month values less than 1 are set to 1; other arguments can wrap and have negative values.

Examples

Start Timer in 2 Seconds

Create a timer that displays messages at start time and firing time.

```
t = timer('TimerFcn', @(~,~)disp('Fired.'), ...
    'StartFcn', @(~,~)disp('Started.'));
```

Set the timer to fire 2 seconds from the present time using a serial date. A serial date is specified in days.

```
two = 2/(60^2*24); % two seconds in serial time
fTime = now + two
startat(t,fTime);
```

```
fTime =

   7.3527e+05

Started.
Fired.
```

Wait for the timer to fire, and then delete the timer.

```
delete(t)
```

Start Timer Using Year, Month, Day

Create a timer that displays messages at start time and firing time.

```
t = timer('TimerFcn', @(~,~)disp('Fired.'), ...
    'StartFcn', @(~,~)disp('Started.'));
```

Schedule the timer to start 2 days from present at 00:00:00

```
[Y, M, D, H, MI, S] = datevec(now+2);
startat(t,Y,M,D)
```

```
Started.
```

Manually stop and delete the timer.

```
stop(t)
delete(t)
```

Algorithms

- The `startat` method specifies when the timer object executes the `TimerFcn` callback, not when the timer starts running. The timer starts running with the call to the `startat` method.
- Based on the specified time, `startat` computes and sets the required `StartDelay` property of the timer object, `t`. Additionally, it sets the `Running` property of the timer object to `'on'`, and executes the `StartFcn` callback.

- `startat` modifies the `timer` object's `startDelay` property. As such, `startat` overrides specified values of the timer's `startDelay` property.

See Also

See Also

timer | delete | start | stop

Topics

"Carryover in Date Vectors and Strings"

Introduced before R2006a

stop

Class: timer

Stop timer object

Syntax

```
stop(t)
```

Description

`stop(t)` stops the timer object, `t`. If `t` is an array of timer objects, the `stop` method stops each timer.

The `stop` method sets the `Running` property of the timer object to `'off'` and executes the `StopFcn` callback .

Input Arguments

t

Object of class timer.

Examples

Stop Timer

Create a timer object that generates 100 random numbers and executes one million times. Define a `StopFcn` callback that displays the message 'Timer has stopped.' Start the timer and verify the timer is running

```
t = timer('TimerFcn','rand(100,1);',...
    'ExecutionMode','fixedSpacing','TasksToExecute',1e6,...
    'StopFcn','disp(''Timer has stopped.'')');
start(t)
```

```
t.Running
```

```
ans =
'on'
```

Manually stop the timer and verify it is no longer running. Delete the timer.

```
stop(t)
t.Running
```

```
ans =
'off'
```

```
delete(t)
```

Tips

- Use the `stop` method to stop a timer manually. The timer automatically stops when the `TimerFcn` callback executes the number of times specified by the `ExecutionMode` and `TasksToExecute` properties or when an error occurs while executing a `TimerFcn` callback.

See Also

See Also

timer | delete | start | startat

Introduced before R2006a

timerfind

Class: timer

Find timer object

Syntax

```
out = timerfind
out = timerfind(Name,Value)
out = timerfind(t,Name,Value)
out = timerfind(S)
```

Description

`out = timerfind` finds the "visible timer objects" on page 1-11641and returns an array, `out`.

`out = timerfind(Name,Value)` finds "visible timer objects" on page 1-11641 with property values matching those passed as `Name,Value` pair arguments and returns an array, `out`.

`out = timerfind(t,Name,Value)` matches `Name,Value` pair arguments to the timer objects listed in `t`, where `t` can be an array of timer objects, and returns an array, `out`.

`out = timerfind(S)` matches property values defined in the structure, `S`, and returns an array, `out`. The field names of `S` are timer object property names and the field values are the corresponding property values.

Input Arguments

t

Array of objects of class timer

s

Structure with field names corresponding to timer object property names. Field values are the corresponding property values.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'BusyMode'`

Character vector that indicates action taken when a timer has to execute `TimerFcn` before the completion of previous execution of the `TimerFcn`. When `Running='on'`, `BusyMode` is read only. This table summarizes the busy modes.

`BusyMode` Values	Behavior if Queue Empty	Behavior if Queue Not Empty	Notes
`'drop'`	Adds task to queue	Drops task	Possible skipping of `TimerFcn` calls
`'error'`	Adds task to queue	Completes task; throws error specified by `ErrorFcn`; stops timer	Stops timer after completing task in execution queue
`'queue'`	Adds task to queue	Waits for queue to clear, and then enters task in queue	Adjusts `Period` property to manage tasks in execution queue

See “Handling Timer Queuing Conflicts” for more information.

Default: `'drop'`

`'ErrorFcn'`

Character vector, function handle, or cell array defining the function that the timer executes when an error occurs. If there is an error, this function executes, and then calls `StopFcn`.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function.

The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.

- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see "Timer Callback Functions".

`'ExecutionMode'`

Character vector that defines how the `timer` object schedules timer events. When `Running='on'`, `ExecutionMode` is read only. This table summarizes the execution modes.

Execution Mode	Time `Period` Start Point
`'singleShot'`	In this mode, the timer callback function is only executed once. Therefore, the `Period` property has no effect. This is the default execution mode.
`'fixedRate'`	Starts immediately after the timer callback function is added to the MATLAB execution queue
`'fixedDelay'`	Starts when the timer function callback restarts execution after a time lag due to delays in the MATLAB execution queue
`'fixedSpacing'`	Starts when the timer callback function finishes executing.

- `'singleShot'` is the single execution mode for the `timer` class, and is the default value.

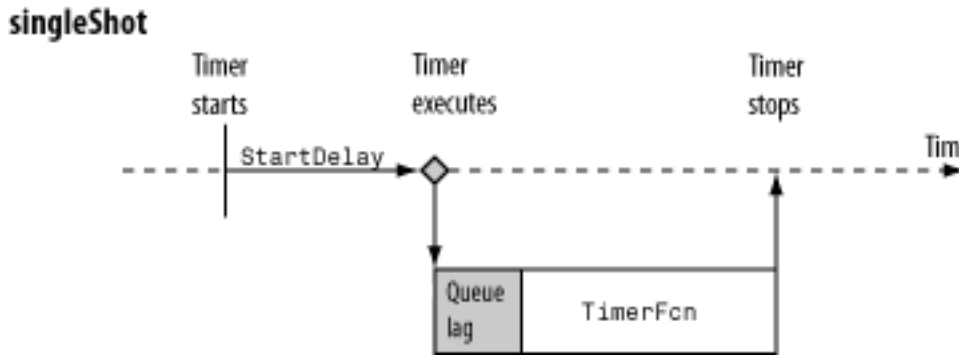

- `'fixedDelay'`, `'fixedRate'`, and `'fixedSpacing'` are the three supported multiexecution modes. These modes define the starting point of the `Period` property. The `Period` property specifies the amount of time between executions, which remains the same. Only the point at which execution begins is different.

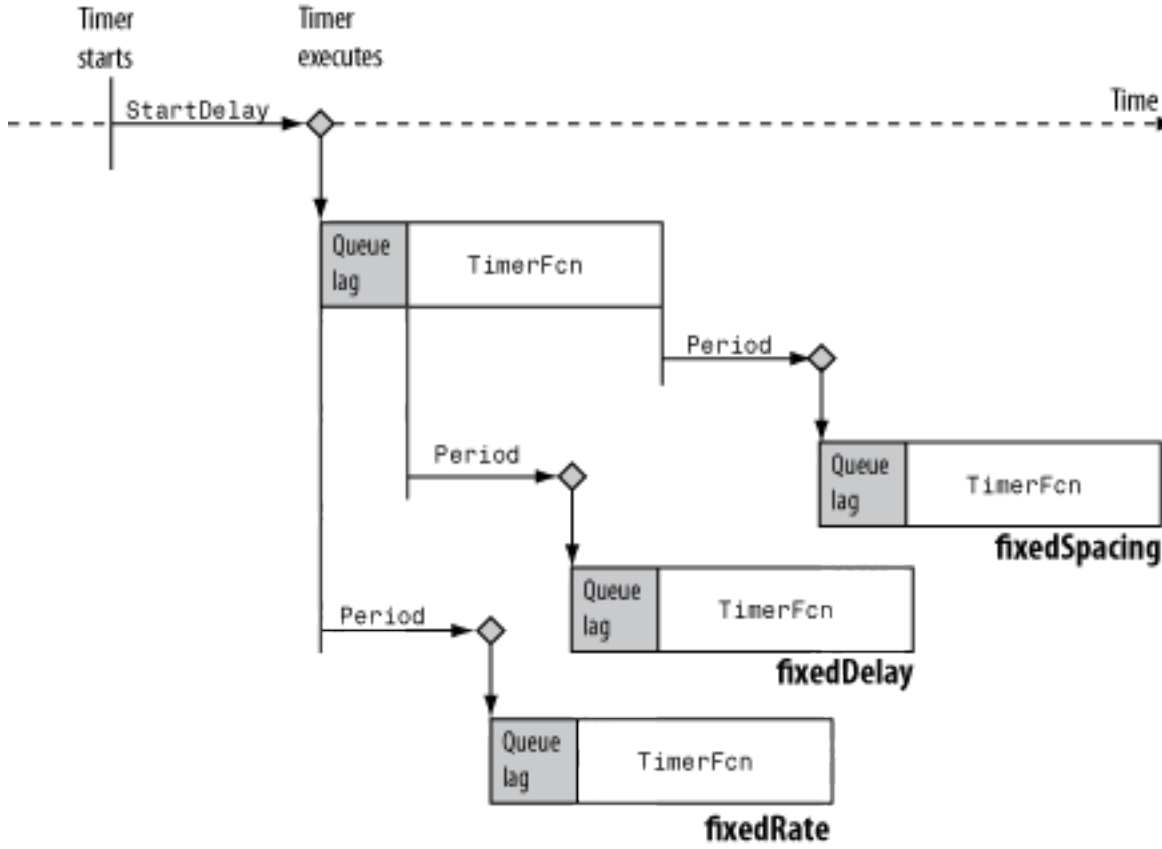

Default: `'singleShot'`

`'Name'`

Character vector representing the `timer` name.

Default: `'timer-i'`, where *`i`* is a number indicating the *`i`*th timer object created this session. To reset *`i`* to 1, execute the `clear classes` command.

'ObjectVisibility'

Character vector with possible values of `'on'` or `'off'`, that provides a way for you to discourage end-user access to the timer objects your application creates. The `timerfind` function does not return an object whose `ObjectVisibility` property is set to `'off'`. Objects that are not visible are still valid. To retrieve a list of all the timer objects in memory, including the invisible ones, use the `timerfindall` function.

Default: `'on'`

'Period'

Number greater than 0.001 that specifies the delay, in seconds, between executions of `TimerFcn`. For the timer to use `Period`, you must set `ExecutionMode` and `TasksToExecute` to schedule multiple timer object callback events.

Default: 1.0

'StartDelay'

Number greater than or equal to 0 that specifies the delay, in seconds, between the start of the timer and the first execution of the function specified in `TimerFcn`. When `Running = 'on'`, `StartDelay` is read only.

Default: 0

'StartFcn'

Character vector, function handle, or cell array defining the function that executes when the timer starts.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see “Timer Callback Functions”.

'StopFcn'

Character vector, function handle, or cell array defining the function that executes when the timer stops.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see "Timer Callback Functions".

The timer stops when

- You call the timer `stop` method.
- The timer finishes executing `TimerFcn`. In other words, the value of `TasksExecuted` reaches the limit set by `TasksToExecute`.
- An error occurs. The `ErrorFcn` callback is called first, followed by the `StopFcn` callback.

You can use `StopFcn` to define clean up actions, such as deleting the timer object from memory.

'Tag'

Character vector that represents a label for the object.

'TasksToExecute'

Number greater than 0, indicating the number of times the timer object is to execute the `TimerFcn` callback. Use the `TasksToExecute` property to set the number of executions. To use `TasksToExecute`, you must set `ExecutionMode` to schedule multiple timer callback events.

Default: `Inf`

'TimerFcn'

Character vector, function handle, or cell array defining the timer callback function. You must define this property before you can start the timer.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see "Timer Callback Functions".

'UserData'

Generic field for data that you want to add to the object.

Read Only Name-Value Pair Arguments

AveragePeriod

Average time in seconds between `TimerFcn` executions since the timer started. Value is `NaN` until timer executes two timer callbacks.

InstantPeriod

The time in seconds between the last two executions of `TimerFcn`. Value is `NaN` until timer executes two timer callbacks.

Running

Character vector defined as `'off'` or `'on'`, indicating whether the timer is currently executing callback functions.

TasksExecuted

The number of times the timer called `TimerFcn` since the timer started.

Type

Character vector that identifies the object type.

Examples

Find Timer Objects Existing in Memory

Create several individual timers and an array of timers.

```
t1 = timer('Tag','broadcastProgress','UserData','Monday');
t2 = timer('Tag','displayProgress','UserData','Monday');
timerArr = [timer('Tag','broadcastProgress','UserData','Tuesday');
    timer('Tag','displayProgress','UserData','Tuesday');
    timer('Tag','displayProgress','UserData','Wednesday');];
```

Find all the timers in memory.

```
out1 = timerfind
```

```
Timer Object Array

   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        ''                       timer-1
   2       singleShot      1        ''                       timer-2
   3       singleShot      1        ''                       timer-3
   4       singleShot      1        ''                       timer-4
   5       singleShot      1        ''                       timer-5
```

Find only those timers in memory that have the `Tag` property value `'displayProgress'`.

```
out2 = timerfind('Tag','displayProgress')
```

```
Timer Object Array

   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        ''                       timer-2
   2       singleShot      1        ''                       timer-4
   3       singleShot      1        ''                       timer-5
```

Limit the search for timers to timer objects in `timerArr` with the `Tag` property value `'displayProgress'`.

```
out3 = timerfind(timerArr,'Tag','displayProgress')
```

```
Timer Object Array

   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        ''                       timer-4
   2       singleShot      1        ''                       timer-5
```

Define a `struct` containing the `Tag` and `UserData` properties of interest.

```
searchStruct = struct('Tag','broadcastProgress','UserData','Monday')
```

```
searchStruct = struct with fields:
         Tag: 'broadcastProgress'
    UserData: 'Monday'
```

Use the `struct` as the search criteria to find timer objects in memory.

```
out4 = timerfind(searchStruct)
```

```
   Timer Object: timer-1

   Timer Settings
      ExecutionMode: singleShot
             Period: 1
           BusyMode: drop
            Running: off

   Callbacks
           TimerFcn: ''
           ErrorFcn: ''
           StartFcn: ''
            StopFcn: ''
```

Delete the timer objects.

```
delete(t1)
delete(t2)
delete(timerArr)
```

Delete Timer by Name

Simulate having existing timers in memory by creating an array of timers. Create a new timer with a custom name. List all visible timers.

```
existingTimers = [timer timer timer];

myTimerName = 'myTimer';
anotherTimer = timer('Name',myTimerName);

timerfind
```

```
Timer Object Array

   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        ''                       timer-1
   2       singleShot      1        ''                       timer-2
   3       singleShot      1        ''                       timer-3
   4       singleShot      1        ''                       myTimer
```

Delete the specified timer and list all visible timers.

```
delete(timerfind('Name',myTimerName));
timerfind
```

```
Timer Object Array

   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        ''                       timer-1
   2       singleShot      1        ''                       timer-2
   3       singleShot      1        ''                       timer-3
```

Delete all visible timers from memory.

```
delete(timerfind)
```

Find Valid Timer Objects Cleared from Workspace

Use `timerfind` to find 'lost' timer object references. References are lost when you clear the timer object from the workspace, but do not delete it from memory.

Create two timer objects. Since the callback function does not require the timer or event object, you can use the tilde (~) operator to ignore the inputs in the function handle.

```
t1 = timer('TimerFcn',@(~,~)disp('Timer 1 Fired!'));
t2 = timer('TimerFcn',@(~,~)disp('Timer 2 Fired!'));
whos
```

```
  Name      Size            Bytes  Class    Attributes
```

```
  t1        1x1                104  timer
  t2        1x1                104  timer
```

Clear one of the timer objects from the workspace. To actually remove the timer from memory, you need to both clear it and delete it.

```
clear t1
whos
```

```
  Name      Size            Bytes  Class    Attributes

  t2        1x1               104  timer
```

Try to delete the timer, `t1`.

```
delete(t1)
```

```
Undefined function or variable 't1'.
```

The timer, `t1`, can not be removed from memory using delete because its reference has been cleared.

Find valid timer objects in memory.

```
out = timerfind
```

```
Timer Object Array

   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        1x1 function_handle arraytimer-1
   2       singleShot      1        1x1 function_handle arraytimer-2
```

Since two timers were found, determine which timer does not exist in the workspace.

```
out ~= t2
```

```
ans =

     1     0
```

The first timer object in `out` is not equal to `t2`. This was previously `t1`. It is reassigned to `t1`. Since it is still valid, the timer can be started.

```
t1 = out(1);
start(t1)
```

```
Timer 1 Fired!
```

Delete timer objects. `timerfind` provides a way of accessing timer objects in memory. It does not copy the objects; therefore you do not need to delete `out` from memory. To verify, use `timerfind`.

```
delete(t1)
delete(t2)
timerfind
```

```
ans =

     []
```

Delete All Timer Objects in Memory

Create four timer objects.

```
t1 = timer('TimerFcn',@(~,~)disp('Timer 1 Fired!'));
t2 = timer('TimerFcn',@(~,~)disp('Timer 2 Fired!'));
t3 = timer('TimerFcn',@(~,~)disp('Timer 3 Fired!'));
t4 = timer('TimerFcn',@(~,~)disp('Timer 4 Fired!'));
```

Clear two timers from the workspace.

```
clear t2 t3
```

Pass `timerfind` to `delete` to remove all timer objects from memory, whether or not they exist in the workspace.

```
delete(timerfind)
timerfind
```

```
ans =

     []
```

Definitions

visible timer objects

Visible timer objects are timer objects that are in memory and have the `ObjectVisibility` property set to 'on'.

Tips

- `timerfind` only finds "visible timer objects" on page 1-11641. Visible timer objects are those that are in memory and have the `ObjectVisibility` property set to `'on'`. To find objects that are hidden, but still valid, use `timerfindall`.

See Also

See Also

timer | delete | timerfindall

Introduced before R2006a

timerfindall

Class: timer

Find timer object, regardless of visibility

Syntax

```
out = timerfindall
out = timerfindall(Name,Value)
out = timerfindall(t,Name,Value)
out = timerfindall(S)
```

Description

`out = timerfindall` finds timer objects existing in memory, regardless of visibility and returns an array, `out`. Use the `ObjectVisibility` property to set the object's visibility.

`out = timerfindall(Name,Value)` finds timer objects existing in memory, regardless of visibility whose property values match those passed as `Name,Value` pair arguments and returns an array, `out`.

`out = timerfindall(t,Name,Value)` matches `Name,Value` pair arguments to the timer objects listed in `t`, where `t` can be an array of timer objects, and returns an array, `out`.

`out = timerfindall(S)` matches property values defined in the structure, `S` and returns an array, `out`. The field names of `S` are timer object property names and the field values are the corresponding property values.

Input Arguments

t

Array of objects of class timer.

S

Structure with field names corresponding to timer object property names. Field values are the corresponding property values.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'BusyMode'`

Character vector that indicates action taken when a timer has to execute `TimerFcn` before the completion of previous execution of the `TimerFcn`. When `Running='on'`, `BusyMode` is read only. This table summarizes the busy modes.

`BusyMode` Values	Behavior if Queue Empty	Behavior if Queue Not Empty	Notes
`'drop'`	Adds task to queue	Drops task	Possible skipping of `TimerFcn` calls
`'error'`	Adds task to queue	Completes task; throws error specified by `ErrorFcn`; stops timer	Stops timer after completing task in execution queue
`'queue'`	Adds task to queue	Waits for queue to clear, and then enters task in queue	Adjusts `Period` property to manage tasks in execution queue

See “Handling Timer Queuing Conflicts” for more information.

Default: `'drop'`

`'ErrorFcn'`

Character vector, function handle, or cell array defining the function that the timer executes when an error occurs. If there is an error, this function executes, and then calls `StopFcn`.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see "Timer Callback Functions".

`'ExecutionMode'`

Character vector that defines how the `timer` object schedules timer events. When `Running='on'`, `ExecutionMode` is read only. This table summarizes the execution modes.

Execution Mode	Time `Period` Start Point
`'singleShot'`	In this mode, the timer callback function is only executed once. Therefore, the `Period` property has no effect. This is the default execution mode.
`'fixedRate'`	Starts immediately after the timer callback function is added to the MATLAB execution queue
`'fixedDelay'`	Starts when the timer function callback restarts execution after a time lag due to delays in the MATLAB execution queue
`'fixedSpacing'`	Starts when the timer callback function finishes executing.

- `'singleShot'` is the single execution mode for the `timer` class, and is the default value.

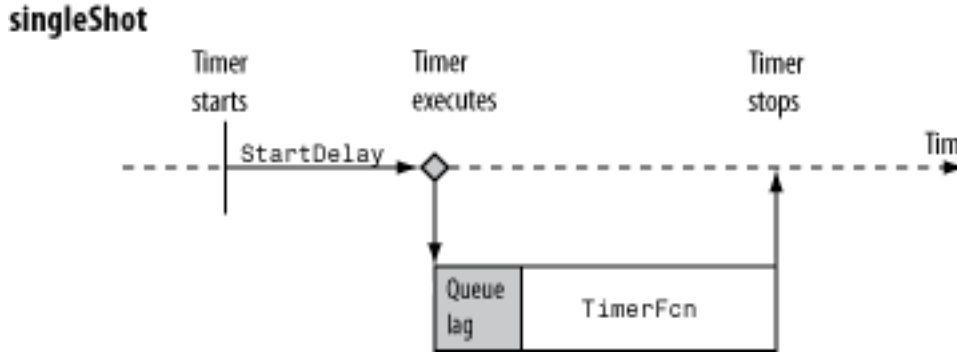

- `'fixedDelay'`, `'fixedRate'`, and `'fixedSpacing'` are the three supported multiexecution modes. These modes define the starting point of the `Period` property. The `Period` property specifies the amount of time between executions, which remains the same. Only the point at which execution begins is different.

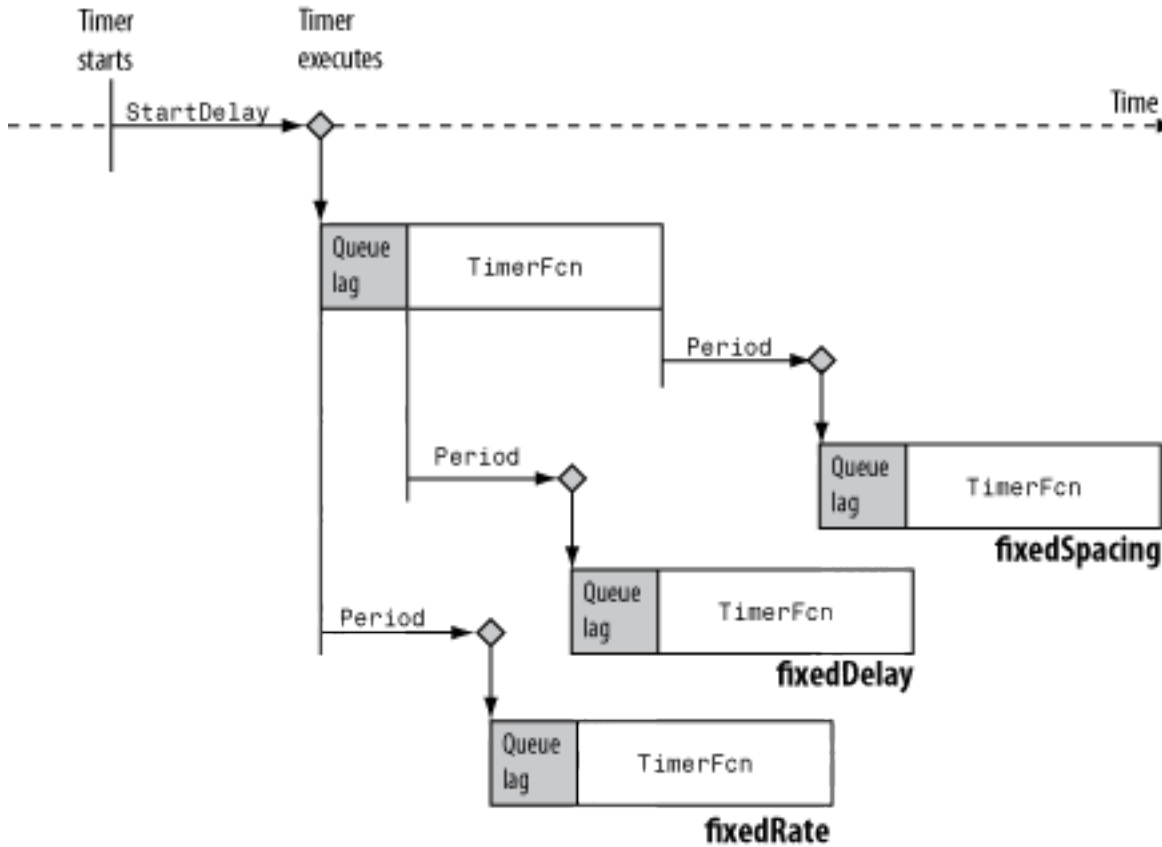

Default: `'singleShot'`

`'Name'`

Character vector representing the `timer` name.

Default: `'timer-i'`, where *i* is a number indicating the *i*th timer object created this session. To reset *i* to 1, execute the `clear classes` command.

`'ObjectVisibility'`

Character vector with possible values of `'on'` or `'off'`, that provides a way for you to discourage end-user access to the timer objects your application creates. The `timerfind`

function does not return an object whose `ObjectVisibility` property is set to `'off'`. Objects that are not visible are still valid. To retrieve a list of all the timer objects in memory, including the invisible ones, use the `timerfindall` function.

Default: `'on'`

`'Period'`

Number greater than 0.001 that specifies the delay, in seconds, between executions of `TimerFcn`. For the timer to use `Period`, you must set `ExecutionMode` and `TasksToExecute` to schedule multiple timer object callback events.

Default: 1.0

`'StartDelay'`

Number greater than or equal to 0 that specifies the delay, in seconds, between the start of the timer and the first execution of the function specified in `TimerFcn`. When `Running = 'on'`, `StartDelay` is read only.

Default: 0

`'StartFcn'`

Character vector, function handle, or cell array defining the function that executes when the timer starts.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see “Timer Callback Functions”.

`'StopFcn'`

Character vector, function handle, or cell array defining the function that executes when the timer stops.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see "Timer Callback Functions".

The timer stops when

- You call the timer `stop` method.
- The timer finishes executing `TimerFcn`. In other words, the value of `TasksExecuted` reaches the limit set by `TasksToExecute`.
- An error occurs. The `ErrorFcn` callback is called first, followed by the `StopFcn` callback.

You can use `StopFcn` to define clean up actions, such as deleting the timer object from memory.

`'Tag'`

Character vector that represents a label for the object.

`'TasksToExecute'`

Number greater than 0, indicating the number of times the timer object is to execute the `TimerFcn` callback. Use the `TasksToExecute` property to set the number of executions. To use `TasksToExecute`, you must set `ExecutionMode` to schedule multiple timer callback events.

Default: `Inf`

`'TimerFcn'`

Character vector, function handle, or cell array defining the timer callback function. You must define this property before you can start the timer.

- If you specify this property using a character vector, when MATLAB executes the callback it evaluates the MATLAB code contained in the character vector.
- If you specify this property using a function handle, when MATLAB executes the callback it passes the `timer` object and an event structure to the callback function. The event structure contains the type of event in the `Type` field and the time of the event in the `Data` field.
- If your callback function accepts arguments in addition to the `timer` object and event data, specify this property as a cell array containing the function handle and the additional arguments.

For more information, see "Timer Callback Functions".

`'UserData'`

Generic field for data that you want to add to the object.

Read Only Name-Value Pair Arguments

`AveragePeriod`

Average time in seconds between `TimerFcn` executions since the timer started. Value is `NaN` until timer executes two timer callbacks.

`InstantPeriod`

The time in seconds between the last two executions of `TimerFcn`. Value is `NaN` until timer executes two timer callbacks.

`Running`

Character vector defined as `'off'` or `'on'`, indicating whether the timer is currently executing callback functions.

`TasksExecuted`

The number of times the timer called `TimerFcn` since the timer started.

`Type`

Character vector that identifies the object type.

Examples

Find and Delete All Timers From Memory

Create four timer objects.

```
t1 = timer('TimerFcn',@(~,~)disp('Timer 1 Fired!'));
t2 = timer('TimerFcn',@(~,~)disp('Timer 2 Fired!'));
t3 = timer('TimerFcn',@(~,~)disp('Timer 3 Fired!'));
t4 = timer('TimerFcn',@(~,~)disp('Timer 4 Fired!'));
```

Set timers `t2` and `t4` to be invisible.

```
t2.ObjectVisibility = 'off';
t4.ObjectVisibility = 'off';
```

Clear timers `t1` and `t2` from the workspace.

```
clear t1 t2
whos
```

```
  Name      Size            Bytes  Class    Attributes

  t3        1x1               104  timer
  t4        1x1               104  timer
```

Find all visible timers in memory.

```
timerfind
```

```
Timer Object Array

   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        1x1 function_handle arraytimer-1
   2       singleShot      1        1x1 function_handle arraytimer-3
```

`timerfind` finds only timers `t1` and `t2`, since they are visible. Timer `t2` is still valid and in memory even though it was cleared from the workspace

Find all timers in memory.

```
timerfindall
```

```
Timer Object Array
```

```
   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        1x1 function_handle arraytimer-1
   2       singleShot      1        1x1 function_handle arraytimer-2
   3       singleShot      1        1x1 function_handle arraytimer-3
   4       singleShot      1        1x1 function_handle arraytimer-4
```

`timerfindall` finds all four valid timers in memory even though `t2` and `t4` are invisible and `t1` and `t2` were cleared from the workspace.

Delete all timers from memory.

```
delete(timerfindall)
```

Find Timer Objects Existing in Memory

Create several individual timers and an array of timers.

```
t1 = timer('Tag', 'broadcastProgress','UserData','Monday');
t2 = timer('Tag', 'displayProgress','UserData','Monday');
timerArr = [timer('Tag', 'broadcastProgress','UserData','Tuesday');
    timer('Tag', 'displayProgress','UserData','Tuesday');
    timer('Tag', 'displayProgress','UserData','Wednesday');];
```

Make timer `t1` and `timerArr(2)` invisible.

```
t1.ObjectVisibility = 'off';
timerArr(2).ObjectVisibility = 'off';
```

Find all the timers in memory using `timerfind`.

```
out1 = timerfind
```

```
Timer Object Array

   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        ''                       timer-2
   2       singleShot      1        ''                       timer-3
   3       singleShot      1        ''                       timer-5
```

`timerfind` does not find the hidden timers.

Find all the timers in memory using `timerfindall`.

```
out2 = timerfindall
```

```
Timer Object Array
```

```
   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        ''                       timer-1
   2       singleShot      1        ''                       timer-2
   3       singleShot      1        ''                       timer-3
   4       singleShot      1        ''                       timer-4
   5       singleShot      1        ''                       timer-5
```

`timerfindall` finds all timers, even the invisible ones.

Find only those timers in memory that have the value, `'displayProgress'`, as the `Tag` property.

```
out3 = timerfindall('Tag','displayProgress')
```

```
Timer Object Array

   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        ''                       timer-2
   2       singleShot      1        ''                       timer-4
   3       singleShot      1        ''                       timer-5
```

Limit the search for timers that have the value, `'displayProgress'`, as the `Tag` property to timer objects in `timerArr`.

```
out4 = timerfindall(timerArr,'Tag','displayProgress')
```

```
Timer Object Array

   Index:  ExecutionMode:  Period:  TimerFcn:                Name:
   1       singleShot      1        ''                       timer-4
   2       singleShot      1        ''                       timer-5
```

Define a `struct` containing the `Tag` and `UserData` properties of interest.

```
searchStruct = struct('Tag','broadcastProgress','UserData','Monday')
```

```
searchStruct =

         Tag: 'broadcastProgress'
    UserData: 'Monday'
```

Use the `struct` as the search criteria to find timer objects in memory.

```
out5 = timerfindall(searchStruct)
```

```
Timer Object: timer-1

Timer Settings
   ExecutionMode: singleShot
          Period: 1
        BusyMode: drop
         Running: off

Callbacks
        TimerFcn: ''
        ErrorFcn: ''
        StartFcn: ''
         StopFcn: ''
```

Delete the timer objects.

```
delete(timerfindall)
```

Find Invisible Timers

Create four timer objects.

```
t1 = timer('TimerFcn',@(~,~)disp('Timer 1 Fired!'));
t2 = timer('TimerFcn',@(~,~)disp('Timer 2 Fired!'));
t3 = timer('TimerFcn',@(~,~)disp('Timer 3 Fired!'));
t4 = timer('TimerFcn',@(~,~)disp('Timer 4 Fired!'));
```

Set timers `t2` and `t4` to be invisible, and clear timers `t1` and `t2` from the workspace.

```
t2.ObjectVisibility = 'off';
t4.ObjectVisibility = 'off';
clear t1 t2;
whos
```

```
  Name      Size            Bytes  Class    Attributes

  t3        1x1               104  timer
  t4        1x1               104  timer
```

Find all valid invisible timers.

```
out = timerfindall('ObjectVisibility','off')
```

```
Timer Object Array
```

```
Index:  ExecutionMode:  Period:  TimerFcn:                Name:
1       singleShot      1        1x1 function_handle arraytimer-2
2       singleShot      1        1x1 function_handle arraytimer-4
```

Both valid invisible timers were found by `timerfindall`, regardless of whether they were in the workspace.

Tips

- `timerfindall` finds timer objects in memory, regardless of the value of the `ObjectVisibility` property. To limit the search to objects with `ObjectVisibility` set to `'on'`, use `timerfind`. .

See Also

See Also

timer | delete | timerfind

Introduced before R2006a

wait

Class: timer

Block command prompt until timer stops running

Syntax

```
wait(t)
```

Description

`wait(t)` blocks the command prompt until timer, `t`, stops running. If `t` is an array of timer objects, `wait` blocks the MATLAB command line until each timer in `t` has stopped running.

To block the command line, the timer object must first start via start or startat before calling the `wait` method. If the timer is not running, `wait` returns immediately.

Input Arguments

`t`

Array of timer objects

Default:

Examples

Block Command Prompt While Timer Runs

Create a timer that waits 10 seconds, and then displays a message. Start the timer and wait for it to finish.

```
T = timer('TimerFcn',@(~,~)disp('Fired.'),'StartDelay',10);
start(T)
```

```
Fired.
```

Notice that after the timer starts, the MATLAB prompt returns.

Start the timer and use the wait method to block anyone from entering commands at the MATLAB command line. You must start the timer before calling the wait command.

```
start(T)
wait(T)
```

```
Fired.
```

Notice that after the timer starts, the MATLAB prompt disappears until the timer stops.

Delete the timer.

```
delete(T)
```

See Also

See Also

timer | start

Introduced before R2006a

times, .*

Element-wise multiplication

Syntax

```
C = A.*B
C = times(A,B)
```

Description

`C = A.*B` multiplies arrays `A` and `B` element by element and returns the result in `C`.

`C = times(A,B)` is an alternate way to execute `A.*B`, but is rarely used. It enables operator overloading for classes.

Examples

Multiply Two Vectors

Create two vectors, `A` and `B`, and multiply them element by element.

```
A = [1 0 3];
B = [2 3 7];
C = A.*B
```

```
C =

     2     0    21
```

Multiply Two Arrays

Create two 3-by-3 arrays, `A` and `B`, and multiply them element by element.

```
A = [1 0 3; 5 3 8; 2 4 6];
B = [2 3 7; 9 1 5; 8 8 3];
C = A.*B
```

```
C =

     2     0    21
    45     3    40
    16    32    18
```

Multiply Row and Column Vectors

Create a row vector a and a column vector b, then multiply them. The 1-by-3 row vector and 6-by-1 column vector combine to produce a 6-by-3 matrix with all combinations of elements multiplied.

```
a = [1 2 3]
```

```
a =

     1     2     3
```

```
b = (1:6)'
```

```
b =

     1
     2
     3
     4
     5
     6
```

```
a.*b
```

```
ans =

     1     2     3
     2     4     6
     3     6     9
     4     8    12
     5    10    15
     6    12    18
```

- “Combine Categorical Arrays Using Multiplication”

Input Arguments

A — Left array

scalar | vector | matrix | multidimensional array

Left array, specified as a scalar, vector, matrix, or multidimensional array. Numeric inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are datetime, duration, or calendar duration arrays, then they must be the same size unless one is a scalar.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `categorical` | `duration` | `calendarDuration`
Complex Number Support: Yes

B — Right array

scalar | vector | matrix | multidimensional array

Right array, specified as a scalar, vector, matrix, or multidimensional array. Numeric inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

If A and B are datetime, duration, or calendar duration arrays, then they must be the same size unless one is a scalar.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `categorical` | `duration` | `calendarDuration`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Multiplication of pure imaginary numbers by non-finite numbers might not match MATLAB. The code generator does not specialize multiplication by pure imaginary numbers—it does not eliminate calculations with the zero real part. For example, `(Inf + 1i)*1i = (Inf*0 – 1*1) + (Inf*1 + 1*0)i = NaN + Infi`.

See Also

See Also

`mtimes`

Topics

“Combine Categorical Arrays Using Multiplication”
“Array vs. Matrix Operations”
“Operator Precedence”
“MATLAB Operators and Special Characters”

Introduced before R2006a

timerange

Time range for timetable row subscripting

Syntax

```
S = timerange(startTime,endTime)
S = timerange(startTime,endTime,intervalType)
```

Description

`S = timerange(startTime,endTime)` creates a subscript to select rows of a timetable within a range of times. `S` selects all rows whose times are in the time interval specified by `startTime` and `endTime`, including `startTime` but not `endTime`. In other words, the time interval is a half-open interval. `startTime` and `endTime` are either datetime or duration scalars, or character vectors that specify dates and times.

If `startTime` and `endTime` are datetime values, then you only can use `S` to subscript into a timetable whose row times are datetime values. Similarly, if `startTime` and `endTime` are duration values, then you only can use `S` to subscript into a timetable whose row times are duration values.

`S = timerange(startTime,endTime,intervalType)` creates a subscript over the type of interval specified by `intervalType`. For example, if `intervalType` is `'closed'`, then `S` includes both `startTime` and `endTime` in the time range it specifies.

Examples

Select Timetable Rows in Specified Time Interval

Create a timetable that contains times along with measurements of temperature, pressure, and wind speed and direction. Select rows whose times fall within a specified time interval.

```
Time = datetime({'12/18/2015 08:00:00';'12/18/2015 10:00:0';'12/18/2015 12:00:00';...
                 '12/18/2015 14:00:00';'12/18/2015 16:00:00';'12/18/2015 18:00:00'});
```

```
Temp = [37.3;39.1;42.3;45.7;41.2;39.9];
Pressure = [30.1;30.03;29.9;29.8;30.0;29.9];
WindSpeed = [13.4;6.5;7.3;8.5;9.2;4.3];
WindDirection = categorical({'NW';'N';'NW';'NW';'NNW';'N'});
TT = timetable(Time,Temp,Pressure,WindSpeed,WindDirection)
```

```
TT = 6×4 timetable
            Time             Temp    Pressure    WindSpeed    WindDirection
    ____________________     ____    ________    _________    _____________

    18-Dec-2015 08:00:00     37.3     30.1       13.4         NW
    18-Dec-2015 10:00:00     39.1    30.03        6.5         N
    18-Dec-2015 12:00:00     42.3     29.9        7.3         NW
    18-Dec-2015 14:00:00     45.7     29.8        8.5         NW
    18-Dec-2015 16:00:00     41.2       30        9.2         NNW
    18-Dec-2015 18:00:00     39.9     29.9        4.3         N
```

Specify a time range between `12/18/2015 08:00:00` and `12/18/2015 12:00:00`. The output timetable includes the start of the time range, but not the end.

```
S = timerange('12/18/2015 08:00:00','12/18/2015 12:00:00');
TT2 = TT(S,:)
```

```
TT2 = 2×4 timetable
            Time             Temp    Pressure    WindSpeed    WindDirection
    ____________________     ____    ________    _________    _____________

    18-Dec-2015 08:00:00     37.3     30.1       13.4         NW
    18-Dec-2015 10:00:00     39.1    30.03        6.5         N
```

Select Timetable Rows in Closed Time Interval

Create a timetable.

```
Time = [seconds(1):seconds(1):seconds(5)];
TT = timetable(Time',[98;97.5;97.9;98.1;97.9],[120;111;119;117;116],...
               'VariableNames',{'Reading1','Reading2'})
```

```
TT = 5×2 timetable
     Time    Reading1    Reading2
    _____    ________    ________
```

```
    1 sec      98        120
    2 sec    97.5        111
    3 sec    97.9        119
    4 sec    98.1        117
    5 sec    97.9        116
```

Select rows that fall within a closed time interval between two and four seconds. The closed interval includes both the start and end times.

```
S = timerange(seconds(2),seconds(4),'closed');
TT2 = TT(S,:)
```

```
TT2 = 3×2 timetable
     Time    Reading1    Reading2
    _____    ________    ________

    2 sec    97.5        111
    3 sec    97.9        119
    4 sec    98.1        117
```

- "Create Timetables"
- "Select Timetable Data by Row Time and Variable Type"

Input Arguments

`startTime,endTime` — Start and end times of time range

pair of datetime scalars | pair of duration scalars | pair of character vectors

Start and end times of time range, specified as a pair of datetime or duration scalars, or as a pair of character vectors.

If `startTime` and `endTime` are character vectors, then the character vectors specify dates and times that the `datetime` function can convert into datetime values.

`intervalType` — Type of time range interval

character vector

Type of time range interval, specified as a character vector. The table shows the types of time range intervals.

Interval Type	Description
`'open'`	Select rows with times that satisfy the open interval `startTime < rowTime` and `rowTime < endTime`
`'closed'`	Select rows with times that satisfy the closed interval `startTime <= rowTime` and `rowTime <= endTime`
`'openleft'`	Select rows with times that satisfy the half-open interval `startTime < rowTime` and `rowTime <= endTime`
`'openright'` (default)	Select rows with times that satisfy the half-open interval `startTime <= rowTime` and `rowTime < endTime`
`'closedright'`	Equivalent to `'openleft'`
`'closedleft'`	Equivalent to `'openright'`

See Also

See Also

`retime` | `synchronize` | `vartype` | `withtol`

Topics

"Create Timetables"
"Select Timetable Data by Row Time and Variable Type"
"Tables"
"Represent Dates and Times in MATLAB"

Introduced in R2016b

timetable

Create timetable from workspace variables

The `timetable` function creates a timetable. For more information on creating and using timetables, see “Timetables”.

Syntax

```
TT = timetable(rowTimes,var1,...,varN)
TT = timetable(var1,...,varN,'RowTimes',rowTimes)
TT = timetable( ___ ,'VariableNames',{varName1,...,varNameN})
```

Description

`TT = timetable(rowTimes,var1,...,varN)` creates a timetable from the input data variables `var1,...,varN` and the time vector `rowTimes`. The data variables can be different sizes and data types as long as they have the same number of rows. `rowTimes` must be a datetime or duration vector, also with the same number of rows.

To create a timetable from a table or an array, use the `table2timetable` or `array2timetable` function.

`TT = timetable(var1,...,varN,'RowTimes',rowTimes)` creates a timetable from the input data variables `var1,...,varN` and the time vector `rowTimes`.

`TT = timetable( ___ ,'VariableNames',{varName1,...,varNameN})` creates a timetable and assigns the variables the names `varName1,...,varNameN`. The variable names must be unique, valid MATLAB identifiers in a cell array. You can use this syntax with any of the input arguments of the previous syntaxes.

Examples

Create Timetable from Workspace Variables

Create a timetable from workspace variables that contain times as well as temperature, pressure, and wind speed and direction measurements. The values in `Time` become

the row times of the timetable. All the other workspace variables become the timetable variables.

```
Time = datetime({'2015-12-18 08:03:05';'2015-12-18 10:03:17';'2015-12-18 12:03:13'});
Temp = [37.3;39.1;42.3];
Pressure = [30.1;30.03;29.9];
WindSpeed = [13.4;6.5;7.3];
WindDirection = categorical({'NW';'N';'NW'});
TT = timetable(Time,Temp,Pressure,WindSpeed,WindDirection)
```

```
TT = 3×4 timetable
            Time              Temp    Pressure    WindSpeed    WindDirection
    ____________________      ____    ________    _________    _____________

    18-Dec-2015 08:03:05      37.3     30.1       13.4         NW
    18-Dec-2015 10:03:17      39.1    30.03        6.5         N
    18-Dec-2015 12:03:13      42.3     29.9        7.3         NW
```

Create Timetable with Specified Time Vector

Create a timetable from workspace variables that contain dates as well as temperature, pressure, and precipitation readings, and the durations of storms on those dates. Specify `Date` as the vector of row times.

```
Date = datetime({'2015-12-18';'2015-12-18';'2015-12-18'});
Temp = [37.3;39.1;42.3];
Pressure = [29.4;29.6;30.0];
Precip = [0.1;0.9;0.0];
StormDuration = [hours(1);hours(2);NaN];
TT = timetable(Temp,Pressure,Precip,StormDuration,'RowTimes',Date)
```

```
TT = 3×4 timetable
        Time        Temp    Pressure    Precip    StormDuration
    ___________     ____    ________    ______    _____________

    18-Dec-2015     37.3    29.4        0.1         1 hr
    18-Dec-2015     39.1    29.6        0.9         2 hr
    18-Dec-2015     42.3      30          0       NaN hr
```

Create Timetable and Specify Variable Names

Create a timetable and specify the names of the timetable variables. The vector of row times is a duration vector, whose units are seconds.

```
Time = seconds(1:5)';
TT = timetable(Time,[98;97.5;97.9;98.1;97.9],[120;111;119;117;116],...
               'VariableNames',{'Reading1','Reading2'})
```

```
TT = 5×2 timetable
     Time    Reading1    Reading2
    _____    ________    ________

    1 sec      98        120
    2 sec    97.5        111
    3 sec    97.9        119
    4 sec    98.1        117
    5 sec    97.9        116
```

- "Create Timetables"
- "Clean Timetable with Missing, Duplicate, or Nonuniform Times"
- "Resample and Aggregate Data in Timetable"
- "Combine Timetables and Synchronize Their Data"
- "Select Timetable Data by Row Time and Variable Type"
- "Access Data in a Table"

Input Arguments

`var1,...,varN` — Input variables

arrays

Input variables, specified as arrays with the same number of rows. The input variables can be of different sizes and different data types, as long as they have the same number of rows.

Common input variables are numeric arrays, logical arrays, string arrays, structure arrays, or cell arrays.

Input variables also can be objects that are arrays. Such an array must support indexing of the form `var(index1,...,indexN)`, where `index1` is a numeric or logical vector

that corresponds to rows of the variable `var`. In addition, the array must implement both a `vertcat` method and a `size` method with a `dim` argument.

`rowTimes` — Times associated with rows of timetable
datetime vector | duration vector

Times associated with rows of a timetable, specified as a datetime vector or a duration vector. Each time value in `rowTimes` labels a row in the output timetable, `TT`. The time values in `rowTimes` do not need to be unique, sorted, or regular.

Output Arguments

`TT` — Output timetable
timetable

Output timetable. The timetable can store metadata such as descriptions, variable units, variable names, and row times. For more information, see Timetable Properties.

Unless you specify the timetable variable names using the `VariableNames` name-value pair argument, the `timetable` function generates the variable names automatically. If an input argument is a variable in the current workspace, `timetable` uses that variable name as the timetable variable name. Otherwise, it uses a name consisting of `Var` followed by an integer, such as `Var2`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays with these usage notes.

- **Creation**. There are three ways to create a tall timetable:

  1. Convert an existing tall table using `table2timetable`.

```
ds = datastore('data/folder/path.csv');
tt = tall(ds);
TT = table2timetable(tt);
```

The default behavior is to use the first datetime or duration variable in the tall table `tt` for the row times. To specify the row times yourself, use the `'RowTimes'` name-value pair to specify either a tall datetime or a tall duration vector of row times.

```
TT = table2timetable(tt,'RowTimes',rowTimes)
```

2. Manually construct a tall timetable from the variables in a tall table using the `timetable` constructor.

```
ds = datastore('data/folder/path.csv');
tt = tall(ds);
TT = timetable(rowTimes, tt.Var1, tt.Var2, ...)
```

3. Convert an in-memory timetable into a tall timetable using the syntax `TT = tall(tt)`.

- **Indexing**. The `timerange` and `withtol` functions are supported for indexing into tall timetables. The `vartype` function is not supported.
- **Supported Functions**. This list contains functions that support tall timetables.

head	ismissing	splitapply	topkrows
height	join	stack	timetable2table
horzcat	ndims	standardizeMissi	unique
isempty	numel	table2array	varfun
innerjoin	size	table2cell	width
ismember	sortrows	tail	

For more information, see “Tall Arrays”.

See Also

See Also

`array2timetable` | `isvarname` | `summary` | `table2timetable` | Timetable Properties | `timetable2table` | `uitable`

Topics

"Create Timetables"
"Clean Timetable with Missing, Duplicate, or Nonuniform Times"
"Resample and Aggregate Data in Timetable"
"Combine Timetables and Synchronize Their Data"
"Select Timetable Data by Row Time and Variable Type"
"Access Data in a Table"
"Tables"
"Represent Dates and Times in MATLAB"

Introduced in R2016b

timetable2table

Convert timetable to table

Syntax

```
T = timetable2table(TT)
T = timetable2table(TT,'ConvertRowTimes',false)
```

Description

`T = timetable2table(TT)` converts the `M`-by-`N` timetable `TT` to an `M`-by-`(N+1)` table. The vector of row times from `TT` becomes the first variable in `T`.

To write a timetable out to a text or spreadsheet file, first convert it to a table with `timetable2table`. Then write the table to a file with the `writetable` function.

`T = timetable2table(TT,'ConvertRowTimes',false)` converts the `M`-by-`N` timetable `TT` to an `M`-by-`N` table. `timetable2table` discards the vector of row times from `TT`.

Examples

Convert Timetable to Table

Create a timetable and convert it to a table.

```
Time = datetime({'2015-12-18';'2015-12-19';'2015-12-20'});
Temp = [37.3;39.1;42.3];
Pressure = [29.4;29.6;30.0];
Precip = [0.1;0.9;0.0];
TT = timetable(Time,Temp,Pressure,Precip);
T = timetable2table(TT)
```

```
T = 3×4 table
       Time        Temp    Pressure    Precip
    ___________    ____    ________    ______
```

```
    18-Dec-2015    37.3    29.4        0.1
    19-Dec-2015    39.1    29.6        0.9
    20-Dec-2015    42.3      30          0
```

Display the sizes of T and TT. T has one more variable than TT because `timetable2table` converts the row times of TT to a variable of T.

```
whos T TT
```

```
  Name      Size            Bytes  Class        Attributes

  T         3x4              1667  table
  TT        3x3              1437  timetable
```

Convert Timetable and Discard Row Times

Create a timetable.

```
Time = datetime({'2015-12-18';'2015-12-19';'2015-12-20'});
Temp = [37.3;39.1;42.3];
Pressure = [29.4;29.6;30.0];
Precip = [0.1;0.9;0.0];
TT = timetable(Time,Temp,Pressure,Precip)
```

```
TT = 3×3 timetable
        Time       Temp    Pressure    Precip
    ___________    ____    ________    ______

    18-Dec-2015    37.3    29.4        0.1
    19-Dec-2015    39.1    29.6        0.9
    20-Dec-2015    42.3      30          0
```

Convert TT to a table and discard its row times.

```
T = timetable2table(TT,'ConvertRowTimes',false)
```

```
T = 3×3 table
    Temp    Pressure    Precip
    ____    ________    ______

    37.3    29.4        0.1
    39.1    29.6        0.9
    42.3      30          0
```

- "Create Timetables"
- "Select Timetable Data by Row Time and Variable Type"
- "Access Data in a Table"

Input Arguments

TT — Input timetable
timetable

Input timetable.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

See Also

See Also
`array2timetable` | `isvarname` | `summary` | `table2timetable` | `timetable` | `uitable`

Topics
"Create Timetables"
"Select Timetable Data by Row Time and Variable Type"

"Access Data in a Table"
"Tables"
"Represent Dates and Times in MATLAB"

Introduced in R2016b

Timetable Properties

Access and modify timetable metadata properties

Description

A timetable, `TT`, has properties that store metadata such as its variable names, row times, descriptions, and variable units. `TT.Properties` returns a summary of all of the timetable properties.

You can access a property using *`TT`*`.Properties.`*`PropName`*, where *`TT`* is the name of the timetable and *`PropName`* is one of the timetable properties. For example, to access the `VariableDescriptions` property of a timetable named `Weather`, use `Weather.Properties.VariableDescriptions`.

You can modify a property value using *`TT`*`.Properties.`*`PropName = P` where *`TT`* is the name of the timetable, *`PropName`* is one of the timetable properties, and *`P`* is the desired property value. For example, to modify the `VariableUnits` property of a timetable named `Weather`, use `Weather.Properties.VariableUnits =` *`P`* where *`P`* is a cell array of character vectors containing the specified information.

In contrast, you can access and modify variables within a timetable using *`TT.VarName`* or *`TT.VarName = V`*, where *`TT`* is the name of the timetable, *`VarName`* is the name of the variable you want to access or modify, and *`V`* is the variable value you want.

You also can concatenate all the timetable variables into an array using *`TT`*`.Variables`, where *`TT`* is the name of the timetable. *`TT`*`.Variables` returns the same array as the *`TT`*`{:,:}` syntax.

Timetable Metadata

`VariableNames` — Variable names
cell array of character vectors

Variable names, specified as a cell array of character vectors that are nonempty and distinct. Variable names must be valid MATLAB variable names. The number of character vectors must equal the number of variables. MATLAB removes any leading or trailing white space from the character vectors.

If valid MATLAB identifiers are not available for use as variable names, MATLAB uses a cell array of N character vectors of the form `{'Var1' ... 'VarN'}` where *N* is the number of variables. You can determine valid MATLAB variable names using the function `isvarname`.

The variable names are visible when viewing the timetable and when using the `summary` function. Furthermore, you can use the variable names within parentheses, within curly braces, or with dot indexing to access timetable data.

Example

Create a timetable.

```
TT = timetable(datetime({'2015-12-18';'2015-12-19';'2015-12-20'}),...
               [37.3;39.1;42.3],[30.1;30.03;29.9],[13.4;6.5;7.3])
```

```
TT =

  3×3 timetable

        Time        Var1    Var2     Var3
    ____________    ____    _____    ____

    18-Dec-2015     37.3     30.1    13.4
    19-Dec-2015     39.1    30.03     6.5
    20-Dec-2015     42.3     29.9     7.3
```

Modify variable names using the `Properties.VariableNames` property.

```
TT.Properties.VariableNames = {'Temp' 'Pressure' 'WindSpeed'}
```

```
TT =

  3×3 timetable

        Time        Temp    Pressure    WindSpeed
    ____________    ____    ________    _________

    18-Dec-2015     37.3     30.1       13.4
```

```
    19-Dec-2015    39.1    30.03        6.5
    20-Dec-2015    42.3     29.9        7.3
```

Create a subtable. Include all rows, but subscript on `Temp` and `Pressure`.

```
TT(:,{'Temp','Pressure'})
```

```
ans =

  3×2 timetable

        Time       Temp    Pressure
    ___________    ____    ________

    18-Dec-2015    37.3     30.1
    19-Dec-2015    39.1    30.03
    20-Dec-2015    42.3     29.9
```

Extract data from `TT`. Use variable names within curly braces to extract the data from the variables `Pressure` and `WindSpeed`.

```
TT{:,{'Pressure','WindSpeed'}}
```

```
ans =

   30.1000   13.4000
   30.0300    6.5000
   29.9000    7.3000
```

Extract data from the variable `Temp` using dot indexing.

```
TT.Temp
```

```
ans =

   37.3000
   39.1000
   42.3000
```

Extract all data using the `Variables` property. `TT.Variables` is equivalent to `TT{:,:}`.

```
TT.Variables
```

```
ans =

   37.3000   30.1000   13.4000
   39.1000   30.0300    6.5000
   42.3000   29.9000    7.3000
```

`RowTimes` — Row times

datetime vector | duration vector

Row times, specified as a datetime vector or duration vector. There must be a row time for every row of the timetable. However, a timetable can have row times that are duplicates, out of order, or `NaT` or `NaN` values.

The row times are visible when you view the timetable. Furthermore, you can use the row times within parentheses or curly braces to access the timetable data.

Example

Create a timetable.

```
TT = timetable(datetime({'2015-12-18';'2015-12-19';'2015-12-20'}),...
               [37.3;39.1;42.3],[30.1;30.03;29.9],[13.4;6.5;7.3])
```

```
TT =

  3×3 timetable

        Time        Var1    Var2     Var3
    ___________     ____    _____    ____

    18-Dec-2015     37.3     30.1    13.4
    19-Dec-2015     39.1    30.03     6.5
    20-Dec-2015     42.3     29.9     7.3
```

Display row times using the `Properties.RowTimes` property.

```
TT.Properties.RowTimes
```

```
ans =

  3×1 datetime array

   18-Dec-2015
   19-Dec-2015
   20-Dec-2015
```

Display row times by the name of the vector of row times.

```
TT.Time
```

```
ans =

  3×1 datetime array

   18-Dec-2015
   19-Dec-2015
   20-Dec-2015
```

Create a subtable. Include all variables, but subscript on a subset of row times.

```
TT({'2015-12-19','2015-12-20'},:)
```

```
ans =

  2×3 timetable

        Time        Var1    Var2     Var3
    ____________    ____    _____    ____

    19-Dec-2015     39.1    30.03    6.5
    20-Dec-2015     42.3     29.9    7.3
```

`DimensionNames` — Dimension names

`{'Time' 'Variables'}` (default) | two-element cell array of character vectors

Dimension names, specified as a two-element cell array of character vectors.

Example

Create a timetable. Modify the names of its dimensions using the `Properties.DimensionNames` property. The first dimension is the name of the vector of row times.

```
TT = timetable(datetime({'2015-12-18';'2015-12-19';'2015-12-20'}),...
               [37.3;39.1;42.3],[30.1;30.03;29.9],[13.4;6.5;7.3]);
TT.Properties.DimensionNames = {'Date' 'WeatherData'};
TT.Properties
```

```
ans =

  struct with fields:

             Description: ''
                UserData: []
          DimensionNames: {'Date'  'WeatherData'}
           VariableNames: {'Var1'  'Var2'  'Var3'}
     VariableDescriptions: {}
            VariableUnits: {}
                 RowTimes: [3×1 datetime]
```

`Description` — Timetable description

`''` (default) | character vector

Timetable description, specified as a character vector. This description is visible when using the `summary` function.

Example

Create a timetable. Modify the variable names and the description of the timetable. Display a summary of the result.

```
TT = timetable(datetime({'2015-12-18';'2015-12-19';'2015-12-20'}),...
               [37.3;39.1;42.3],[30.1;30.03;29.9],[13.4;6.5;7.3]);
TT.Properties.VariableNames = {'Temp' 'Pressure' 'WindSpeed'};
```

```
TT.Properties.Description = 'Weather Data from December 2015';
summary(TT)
```

```
Description:  Weather Data from December 2015

RowTimes:

    Time: 3×1 datetime
        Values:

            Min          18-Dec-2015
            Median       19-Dec-2015
            Max          20-Dec-2015
            TimeStep     24:00:00

Variables:

    Temp: 3×1 double

        Values:

            Min       37.3
            Median    39.1
            Max       42.3

    Pressure: 3×1 double

        Values:

            Min        29.9
            Median    30.03
            Max        30.1

    WindSpeed: 3×1 double

        Values:

            Min        6.5
            Median     7.3
            Max       13.4
```

`VariableDescriptions` — Variable descriptions

{} (default) | cell array of character vectors

Variable descriptions, specified as a cell array of character vectors. This property can be an empty cell array, which is the default. If the cell array is not empty, the number of character vectors must equal the number of variables. You can specify an individual empty character vector within the cell array for a variable that does not have a description.

The variable descriptions are visible when using the `summary` function.

Example

Create a timetable. Modify the variable names and descriptions. Display a summary of the result.

```
TT = timetable(datetime({'2015-12-18';'2015-12-19';'2015-12-20'}),...
               [37.3;39.1;42.3],[30.1;30.03;29.9],[13.4;6.5;7.3]);
TT.Properties.VariableNames = {'Temp' 'Pressure' 'WindSpeed'};
TT.Properties.VariableDescriptions = {'Temperature (external)',...
                                      'Pressure in Hg',...
                                      'Wind speed at sensor 123'};
summary(TT)
```

```
RowTimes:

    Time: 3×1 datetime
        Values:

            Min          18-Dec-2015
            Median       19-Dec-2015
            Max          20-Dec-2015
            TimeStep     24:00:00

Variables:

    Temp: 3×1 double

        Description:  Temperature (external)
        Values:

            Min       37.3
            Median    39.1
            Max       42.3
```

```
    Pressure: 3×1 double

        Description:  Pressure in Hg
        Values:

            Min        29.9
            Median    30.03
            Max        30.1

    WindSpeed: 3×1 double

        Description:  Wind speed at sensor 123
        Values:

            Min        6.5
            Median     7.3
            Max       13.4
```

`VariableUnits` — Variable units
{} (default) | cell array of character vectors

Variable units, specified as a cell array of character vectors. This property can be an empty cell array, which is the default. If the cell array is not empty, the number of character vectors must equal the number of variables. You can specify an individual empty character vector within the cell array for a variable that does not have units.

The variable units are visible when using the `summary` function.

Example

Create a timetable. Modify the variable names and units. Display a summary of the result.

```
TT = timetable(datetime({'2015-12-18';'2015-12-19';'2015-12-20'}),...
               [37.3;39.1;42.3],[30.1;30.03;29.9],[13.4;6.5;7.3]);
TT.Properties.VariableNames = {'Temp' 'Pressure' 'WindSpeed'};
TT.Properties.VariableUnits = {'degrees F' 'mm Hg' 'mph'};
summary(TT)
```

```
RowTimes:
```

```
    Time: 3×1 datetime
        Values:

            Min          18-Dec-2015
            Median       19-Dec-2015
            Max          20-Dec-2015
            TimeStep     24:00:00

Variables:

    Temp: 3×1 double

        Units:  degrees F
        Values:

            Min       37.3
            Median    39.1
            Max       42.3

    Pressure: 3×1 double

        Units:  mm Hg
        Values:

            Min        29.9
            Median    30.03
            Max        30.1

    WindSpeed: 3×1 double

        Units:  mph
        Values:

            Min        6.5
            Median     7.3
            Max       13.4
```

`UserData` — Additional timetable information

`[ ]` (default) | variable containing information in any data type

Additional timetable information, specified as a variable containing information in any data type.

Example

Create a timetable. Modify the variable names. Attach an anonymous function as a piece of user data that is associated with the timetable.

```
TT = timetable(datetime({'2015-12-18';'2015-12-19';'2015-12-20'}),...
               [37.3;39.1;42.3],[30.1;30.03;29.9],[13.4;6.5;7.3]);
TT.Properties.VariableNames = {'Temp' 'Pressure' 'WindSpeed'};
Fahrenheit2Celsius = @(x) (5.0/9.0).*(x - 32);
TT.Properties.UserData = Fahrenheit2Celsius;
TT.Properties
```

```
ans =

  struct with fields:

            Description: ''
               UserData: @(x)(5.0/9.0).*(x-32)
         DimensionNames: {'Time'  'Variables'}
          VariableNames: {'Temp'  'Pressure'  'WindSpeed'}
    VariableDescriptions: {}
          VariableUnits: {}
               RowTimes: [3×1 datetime]
```

See Also

See Also

`isvarname` | `summary` | `timetable`

Topics

"Access Data in a Table"
"Select Timetable Data by Row Time and Variable Type"

Introduced in R2016b

timezones

List time zones

Syntax

```
timezones
timezones(area)
```

```
T = ( ___ )
```

Description

`timezones` displays a list of all IANA time zones accepted by the `datetime` function. For each time zone, the list includes the offset from UTC (in hours, where east is positive) and the daylight saving time shift (in hours).

`timezones(area)` displays a list containing all IANA time zones in the specified geographic area.

`T = ( ___ )` returns the list in a table.

Examples

List All Time Zones in Australia

Store all Australian time zones accepted by the `datetime` function in a table.

```
T = timezones('Australia')
```

```
T = 12×4 table
             Name                  Area       UTCOffset    DSTOffset
    ________________________    _________    _________    _________

    'Australia/Adelaide'        Australia      9.5            1
    'Australia/Brisbane'        Australia       10            0
    'Australia/Broken_Hill'     Australia      9.5            1
    'Australia/Currie'          Australia       10            1
```

```
    'Australia/Darwin'         Australia     9.5           0
    'Australia/Eucla'          Australia    8.75           0
    'Australia/Hobart'         Australia      10           1
    'Australia/Lindeman'       Australia      10           0
    'Australia/Lord_Howe'      Australia    10.5         0.5
    'Australia/Melbourne'      Australia      10           1
    'Australia/Perth'          Australia       8           0
    'Australia/Sydney'         Australia      10           1
```

Sort the table by UTC offset.

```
sortrows(T,'UTCOffset')
```

```
ans = 12×4 table
             Name                  Area       UTCOffset    DSTOffset
    ______________________    _________    _________    _________

    'Australia/Perth'          Australia       8           0
    'Australia/Eucla'          Australia    8.75           0
    'Australia/Adelaide'       Australia     9.5           1
    'Australia/Broken_Hill'    Australia     9.5           1
    'Australia/Darwin'         Australia     9.5           0
    'Australia/Brisbane'       Australia      10           0
    'Australia/Currie'         Australia      10           1
    'Australia/Hobart'         Australia      10           1
    'Australia/Lindeman'       Australia      10           0
    'Australia/Melbourne'      Australia      10           1
    'Australia/Sydney'         Australia      10           1
    'Australia/Lord_Howe'      Australia    10.5         0.5
```

Input Arguments

area — Geographic area

'All' | 'Africa' | 'America' | 'Antarctica' | ...

Geographic area, specified as one of the areas in the table.

'Africa'	'Asia'	'Europe'
'America'	'Atlantic'	'Indian'

'Antarctica'	'Australia'	'Pacific'
'Arctic'	'Etc'	'All'

See Also

See Also

`datetime` | datetime Properties

Topics

"Specify Time Zones"

Introduced in R2015b

title

Add title

Syntax

```
title(txt)
title(target,txt)

title( ___ ,Name,Value)
t = title( ___ )
```

Description

`title(txt)` adds the specified title to the axes or chart returned by the `gca` command. Reissuing the `title` command causes the new title to replace the old title.

`title(target,txt)` adds the title to the axes, legend, or chart specified by `target`.

`title( ___ ,Name,Value)` modifies the title appearance using one or more name-value pair arguments. For example, `'FontSize',12` sets the font size to 12 points. Specify name-value pair arguments after all other input arguments. Modifying the title appearance is not supported for all types of charts.

`t = title( ___ )` returns the object used for the title. Use `t` to make future modifications to the title.

Examples

Add Title to Current Axes

Create a figure and display a title in the current axes.

```
plot((1:10).^2)
title('My Title')
```

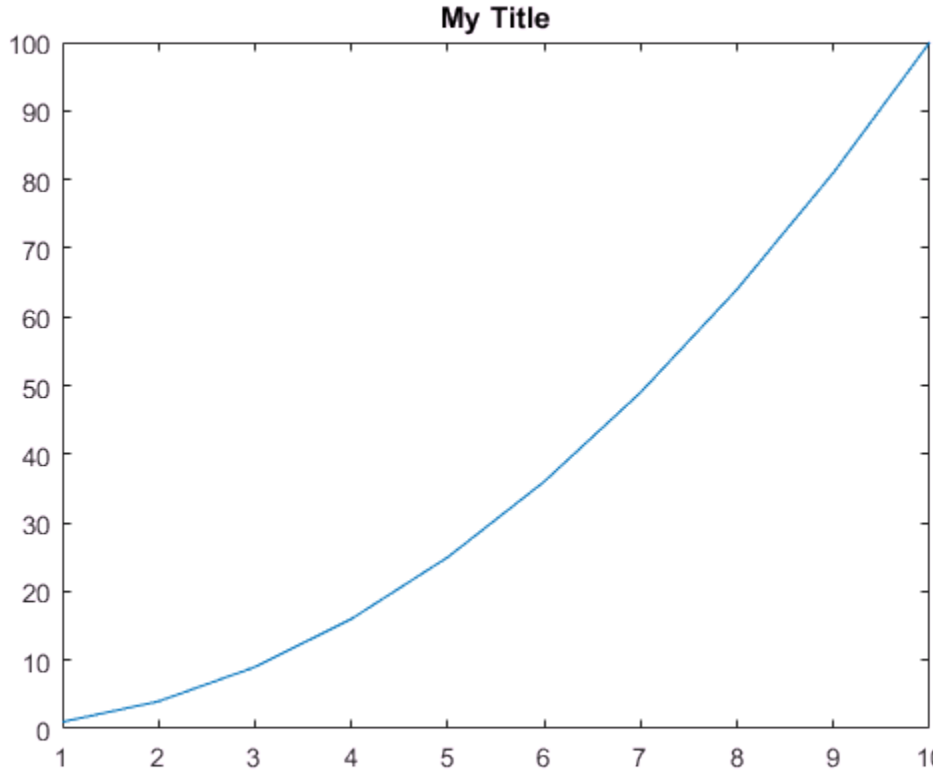

You also can call `title` with a function that returns text. For example, the `date` function returns text with today's date.

```
title(date)
```

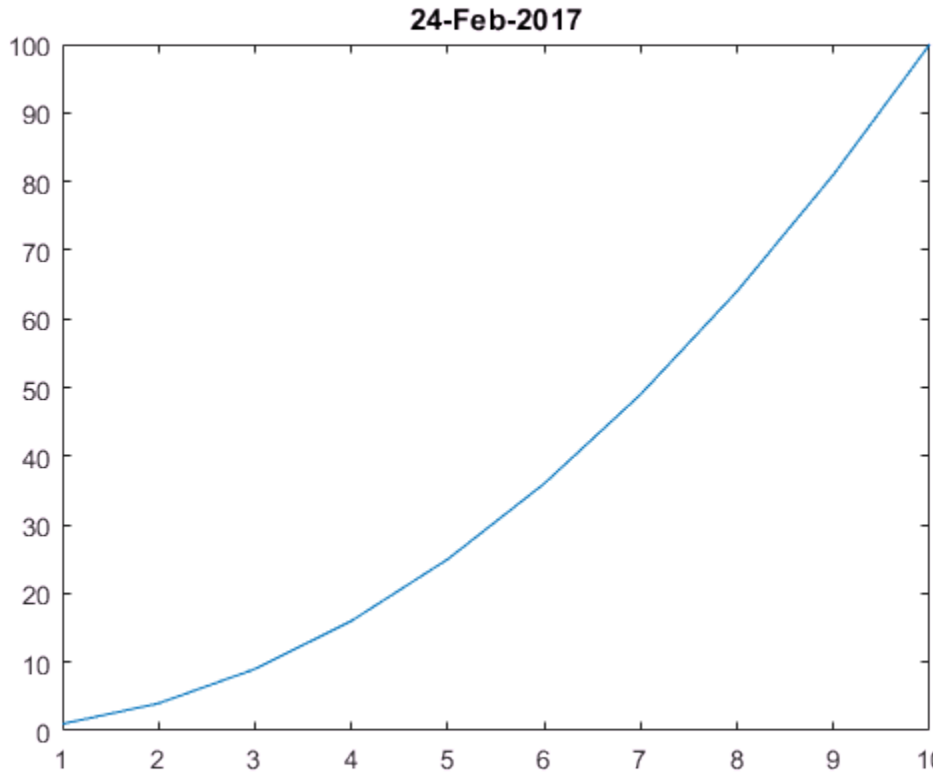

MATLAB® sets the output of `date` as the axes title.

Include Variable's Value in Title

Include the value of variable `c` in a title.

```
figure
plot((1:10).^2)
f = 70;
c = (f-32)/1.8;
title(['Temperature is ',num2str(c),' C'])
```

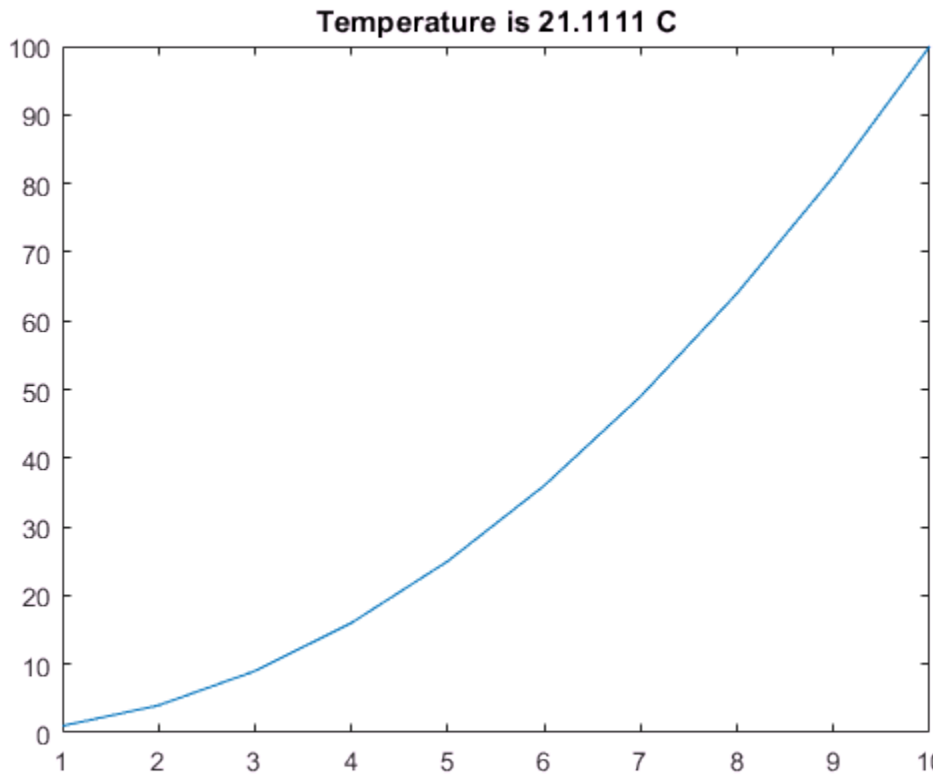

Create Multicolored Title Using TeX Markup

Use the color modifier `\color` to change the color of characters following it from the previous color.

```
plot((1:10).^2)
title(['\fontsize{16}black {\color{magenta}magenta '...
'\color[rgb]{0 .5 .5}teal \color{red}red} black again'])
```

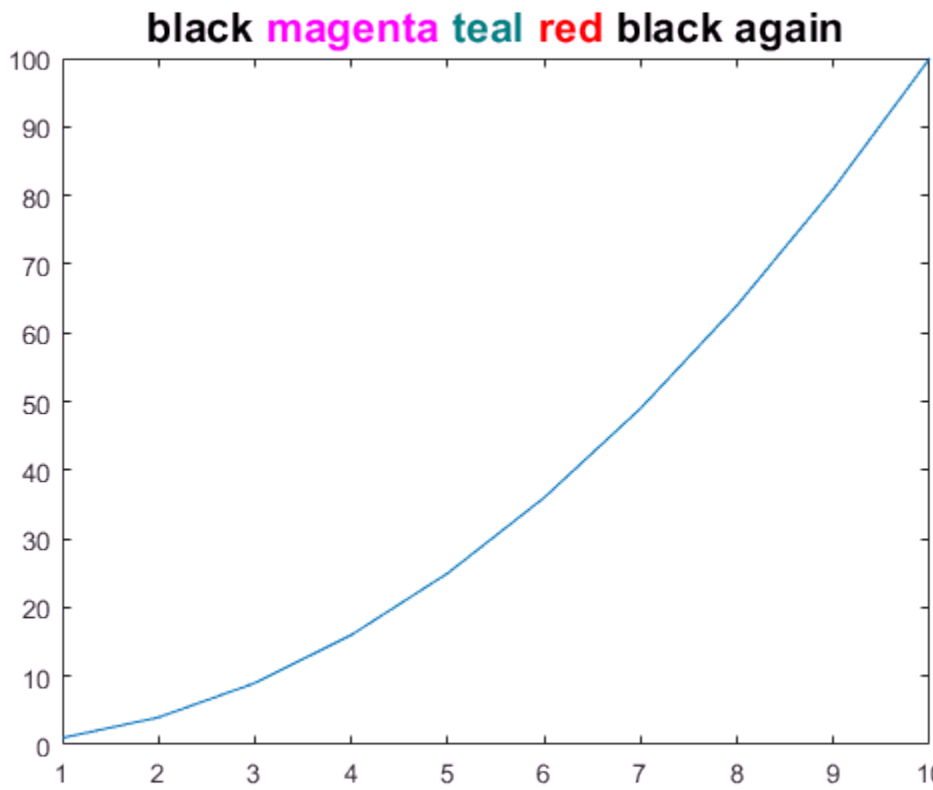

Create Colored Title Using Name,Value Pair Argument

Use the `Name,Value` pair `'Color','m'` to set the color of the title to magenta.

```
figure
plot((1:10).^2)
title('Case number # 3','Color', 'm')
```

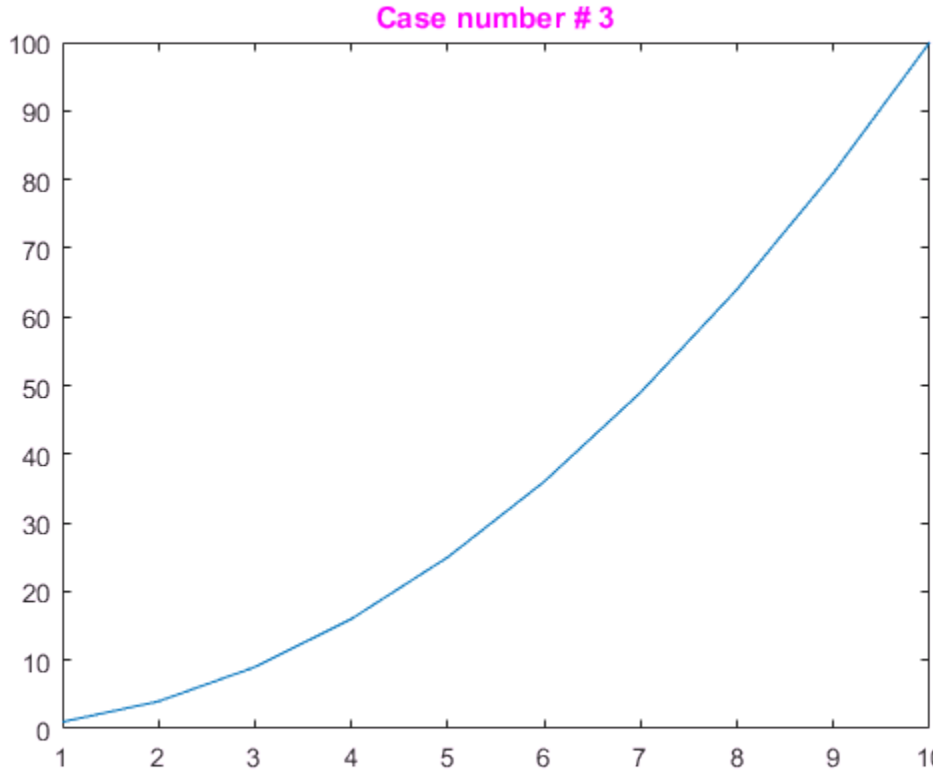

Include Greek Symbols in Title

Use TeX markup to include Greek symbols in a title.

```
t = (0:0.01:0.2);
y = exp(-25*t);
figure
plot(t,y)
title('y = \ite^{\lambda t}','Color','b')
```

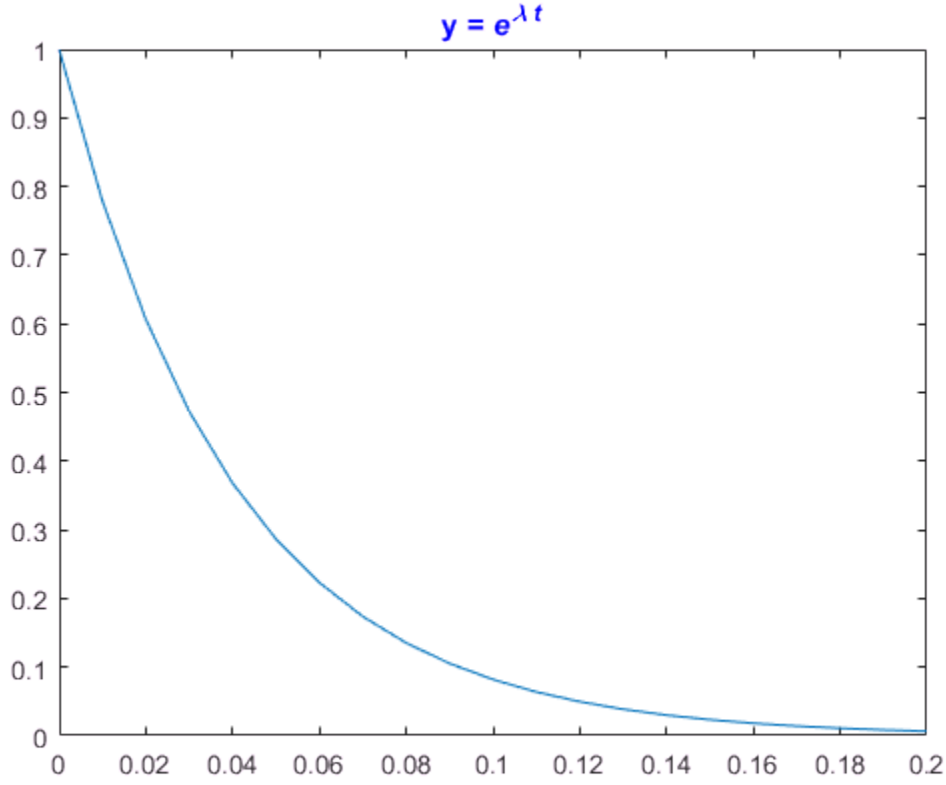

The `'Interpreter'` property must be `'tex'` (the default).

Include Superscript or Subscript Character in Title

```
figure
plot((1:10).^2)
title('\alpha^2 and X_1')
```

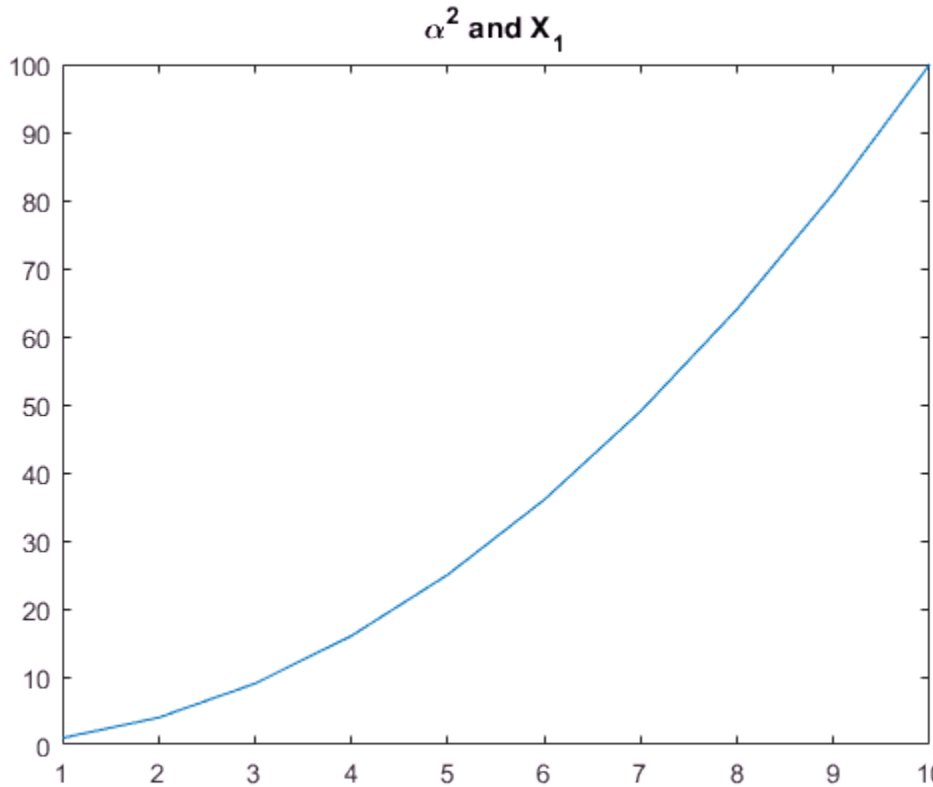

The superscript character, "^", and the subscript character, "_", modify the character or substring defined in braces immediately following.

Create Multiline Title

Create a multiline title using a multiline cell array.

```
figure
plot((1:10).^2)
title({'First line';'Second line'})
```

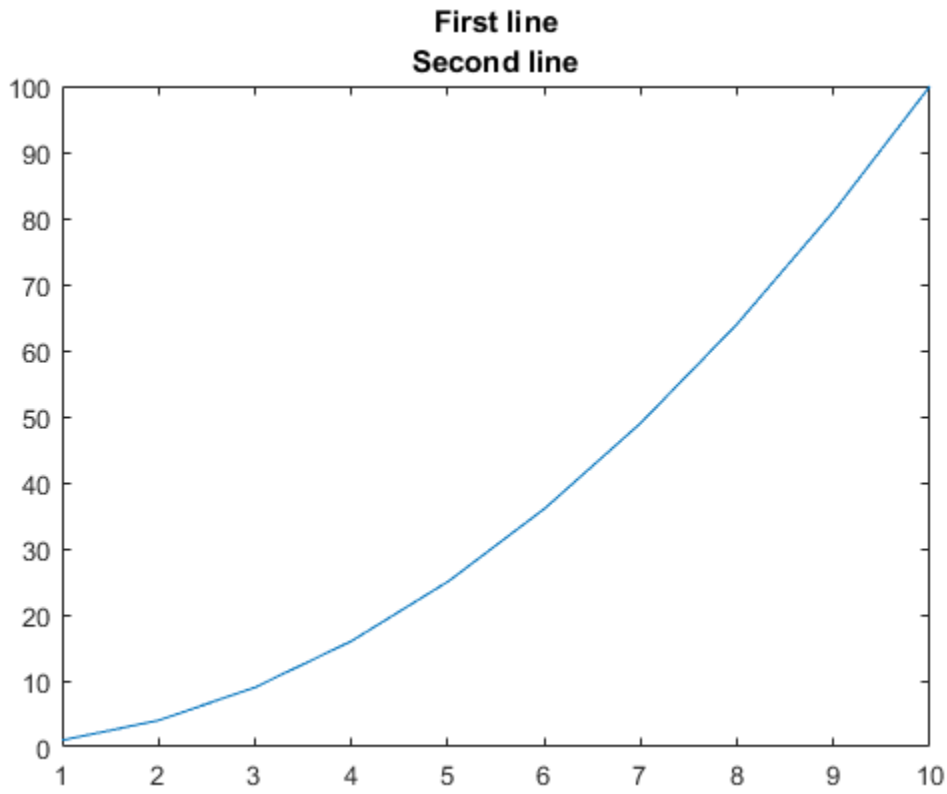

Display Text As Typed

Set the `Interpreter` property as `'none'` so that the text `X_1` is displayed in the figure as typed, without making `1` a subscript of `X`.

```
plot((1:10).^2)
title('X_1','Interpreter','none')
```

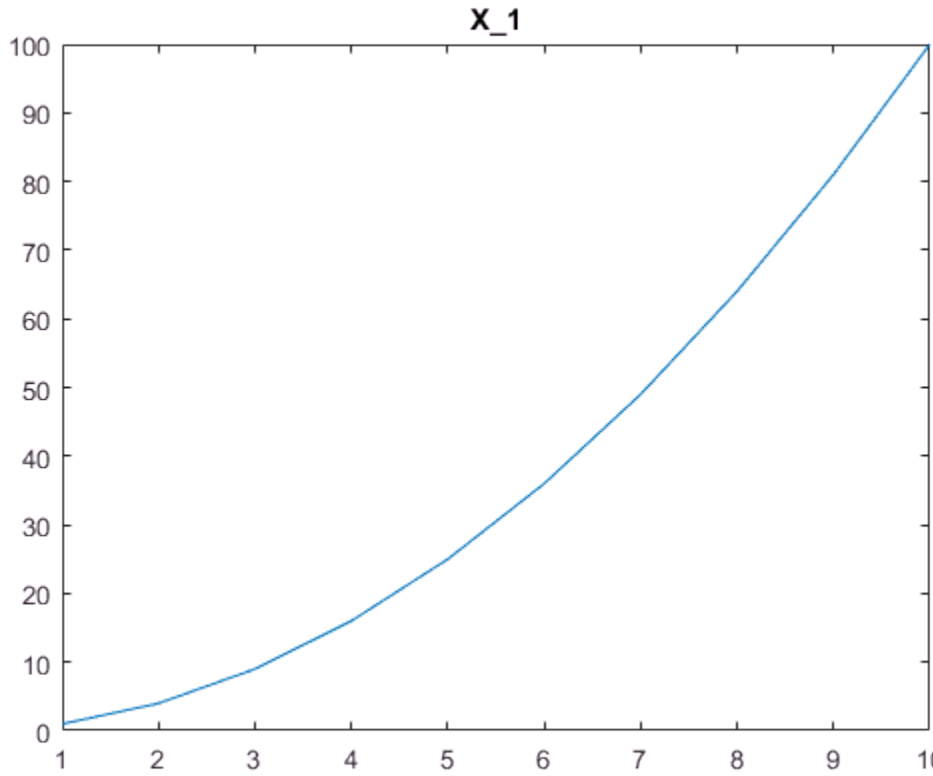

Add Title to Specific Axes

Create two subplots and return the handles to the axes objects, `s(1)` and `s(2)`.

```
figure
s(1) = subplot(2,1,1);
plot((1:10).^2)
s(2) = subplot(2,1,2);
plot((1:10).^3)
```

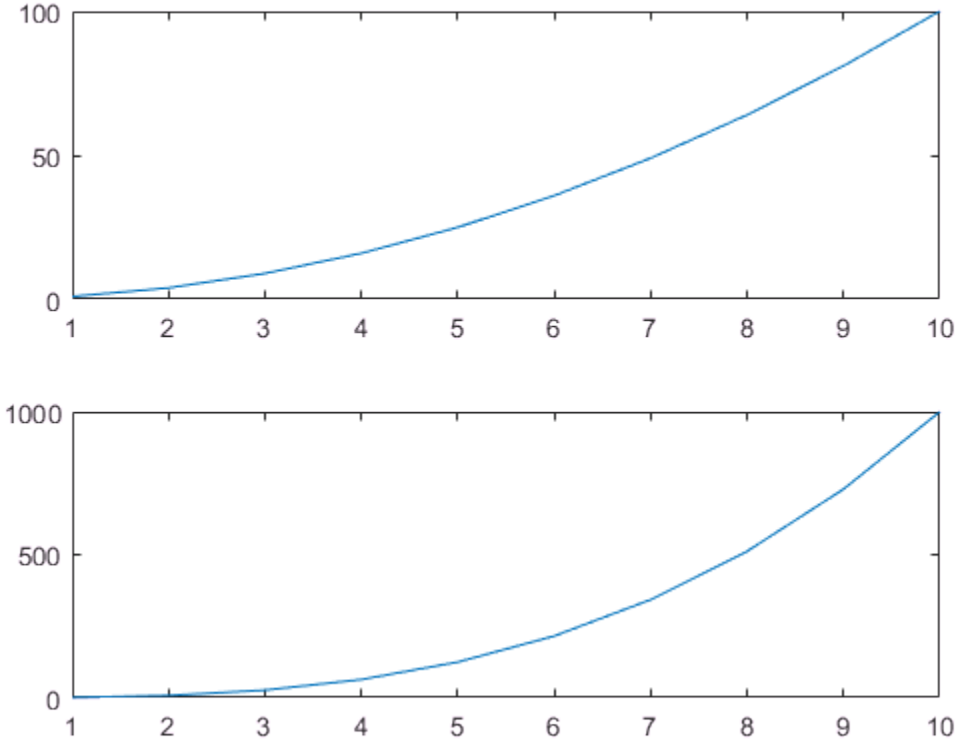

Add a title to each subplot by referring to its axes handle, `s(1)`, or `s(2)`.

```
title(s(1),'Top Plot')
title(s(2),'Bottom Plot')
```

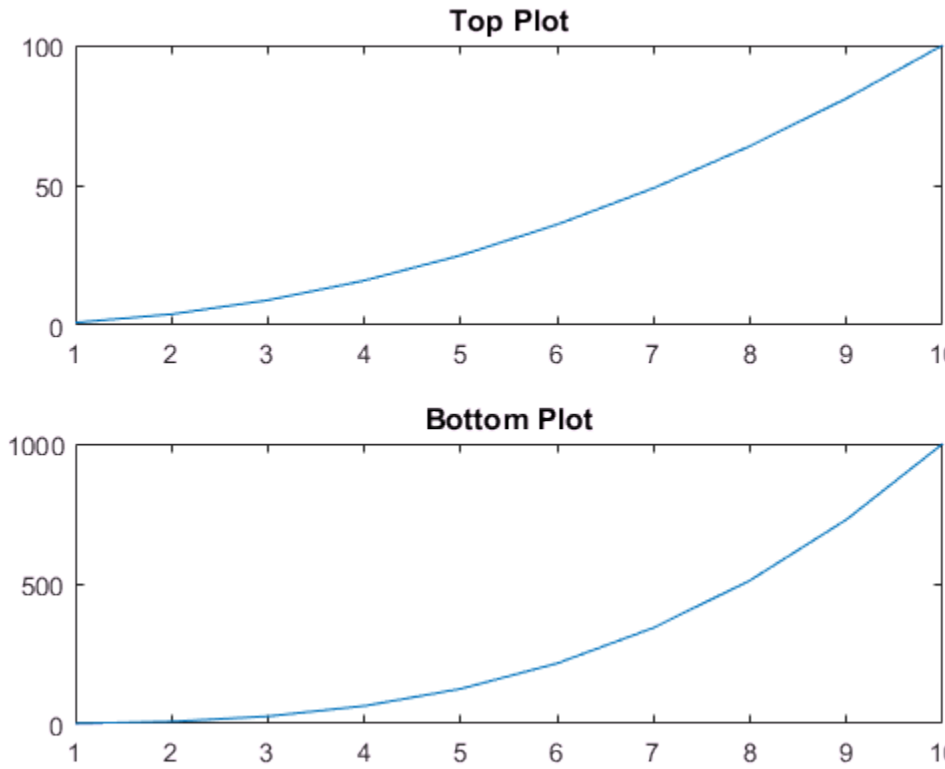

Add Title and Return Text Handle

Add a title to a plot and return the text object.

```
plot((1:10).^2)
t = title('My Title');
```

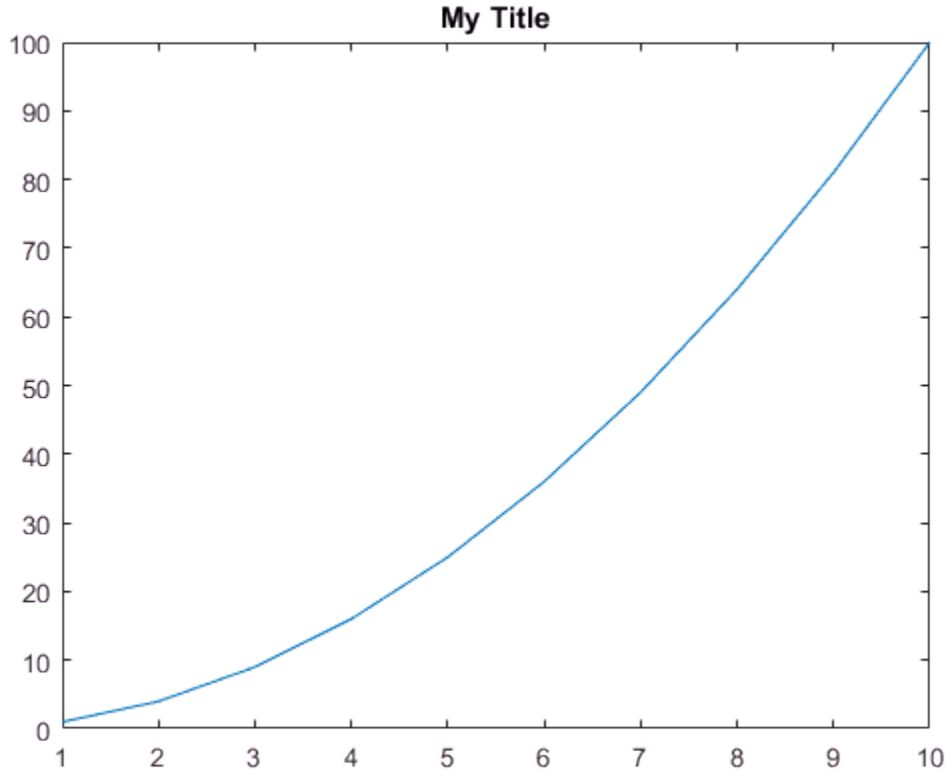

Set the color of the title to red. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
t.Color = 'red';
```

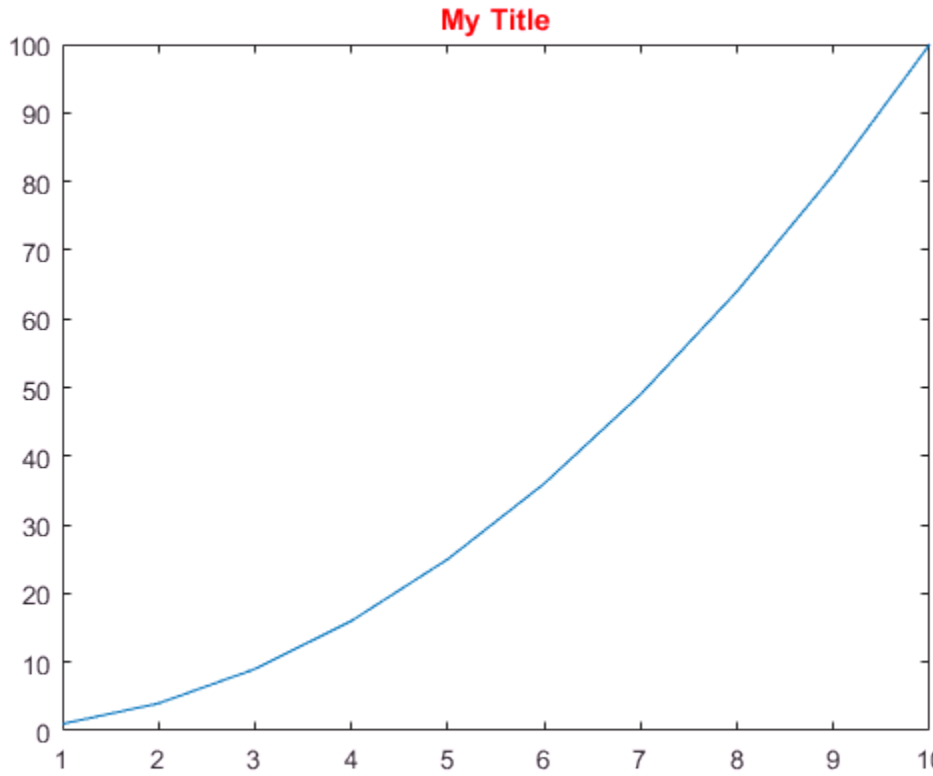

Input Arguments

`txt` — Text to display as title

character array | cell array | numeric value

Text to display as title, specified as a character array, cell array, or numeric value.

Example: `'my label'`

Example: `{'first line','second line'}`

Example: `123`

To include numeric variables with text in a title, use the `num2str` function. For example:

```
x = 42;
str = ['The value is ',num2str(x)];
```

To include special characters, such as superscripts, subscripts, Greek letters, or mathematical symbols, use TeX markup. For a list of supported markup, see the `Interpreter` property.

To create multiline titles:

- Use a cell array where each cell contains a line of text, such as `{'first line','second line'}`.
- Use a character array where each row contains a line of text, such as `['abc'; 'ab ']`. If you use this technique, each row must have the same number of characters.
- Use `sprintf` to create a character vector with a new line character, such as `sprintf('first line \n second line')`.

Numeric titles are converted to text using `sprintf('%g',value)`. For example, `12345678` displays as `1.23457e+07`.

Note: The words `default`, `factory`, and `remove` are reserved words that will not appear in a title when quoted as a normal character vector. To display any of these words individually, precede them with a backslash, such as `'\default'` or `'\remove'`.

`target` — Target for title

`Axes` object | `PolarAxes` object | `Legend` object | graphics object

Target for the title, specified as an `Axes` object, a `PolarAxes` object, `Legend` object, or a graphics object that has a `Title` property. For example, you can add a title to a `HeatmapChart` object.

If you do not specify the target for the title, then the `title` function adds the title to the graphics object returned by the `gca` command.

Note: Some charts do not support modifying the title appearance, such as the color, or returning the text object as an output argument.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Color','red','FontSize',14` adds a title with red, 14-point font.

In addition to the following, you can specify other text object properties using `Name,Value` pair arguments. See Text Properties.

`'FontSize'` — Font size

`11` (default) | scalar value greater than 0

Font size, specified as a scalar value greater than `0` in point units. One point equals 1/72 inch. To change the font units, use the FontUnits property.

If you add a title to an axes object, then the font size properties for the axes also affect the title font size. The title font size updates to equal the axes font size multiplied by the title scale factor. The FontSize property of the axes contains the axes font size. The TitleFontSizeMultiplier property of the axes contains the scale factor. By default, the axes font size is 10 points and the scale factor is 1.1, so the title font size is 11 points.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'FontWeight'` — Thickness of text characters

`'bold'` (default) | `'normal'`

Thickness of the text characters, specified as one of these values:

- `'bold'` — Thicker characters outlines than normal
- `'normal'` — Normal weight as defined by the particular font

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight could still result in the normal font weight.

If you add a title to an axes object, then the TitleFontWeight property for the associated axes affects the `FontWeight` value for the title.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

`'FontName'` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`'Color'` — Text color

`[0 0 0]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. The default color is black with an RGB triplet value of `[0 0 0]`. If you set the color to `'none'`, then the text is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'Interpreter'` — Interpretation of text characters
`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`

Modifier	Description	Example
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value in point units to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Font color — Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsui`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrighta`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

Output Arguments

`t` — Object used for title text

text object

Object used for the title text, returned as one of these types of objects:

- Text object — If you add a title to axes, then `title` returns a text object. Use this text object to access and modify properties of the title after it is created. For a list of text object properties, see Text Properties. You also can access the title through the Title property of the axes object.
- Legend text object — If you add a title to a legend, then `title` returns a legend text object. Use this legend text object to access and modify properties of the title after it is created. For a list of legend text object properties, see Legend Text Properties. You also can access the title through the Title property of the legend object.

See Also

See Also

Functions

`num2str` | `text` | `xlabel` | `ylabel` | `zlabel`

Properties

Text Properties

Topics

"Add Text to Graph Interactively"

Adding Titles to Graphs

Introduced before R2006a

todatenum

Convert CDF epoch object to MATLAB serial date number

Syntax

```
n = todatenum(obj)
```

Description

`n = todatenum(obj)` converts the CDF epoch object `ep_obj` into a MATLAB serial date number. Note that a CDF epoch is the number of milliseconds since `01-Jan-0000` whereas a MATLAB datenum is the number of days since 00-`Jan-0000`.

Examples

Construct a CDF epoch object from text that represents a date. Then, convert the object back into its original form.

```
dstr = datestr(today)
dstr =
   08-Oct-2003

obj = cdfepoch(dstr)
obj =
     cdfepoch object:
     08-Oct-2003 00:00:00

dstr2 = datestr(todatenum(obj))
dstr2 =
   08-Oct-2003
```

See Also

`cdfepoch` | `cdfinfo` | `cdfread` | `datenum` | `datetime`

Introduced before R2006a

toeplitz

Toeplitz matrix

Syntax

```
T = toeplitz(c,r)
T = toeplitz(r)
```

Description

`T = toeplitz(c,r)` returns a nonsymmetric Toeplitz matrix with `c` as its first column and `r` as its first row. If the first elements of `c` and `r` differ, `toeplitz` issues a warning and uses the column element for the diagonal.

`T = toeplitz(r)` returns the symmetric Toeplitz matrix where:

- If `r` is a real vector, then `r` defines the first row of the matrix.
- If `r` is a complex vector with a real first element, then `r` defines the first row and `r'` defines the first column.
- If the first element of `r` is complex, the Toeplitz matrix is Hermitian off the main diagonal, which means $\mathrm{T}_{i,j} = \mathrm{conj}(\mathrm{T}_{j,i})$ for $i \neq j$. The elements of the main diagonal are set to `r(1)`.

Examples

Create Symmetric Toeplitz Matrix

```
r = [1 2 3];
toeplitz(r)
```

```
ans =

     1     2     3
     2     1     2
     3     2     1
```

Create Nonsymmetric Toeplitz Matrix

Create a nonsymmetric Toeplitz matrix with a specified column and row vector. Because the first elements of the column and row vectors do not match, `toeplitz` issues a warning and uses the column for the diagonal element.

```
c = [1  2  3 4];
r = [4 5 6];
toeplitz(c,r)
```

```
Warning: First element of input column does not match first element of input row.
         Column wins diagonal conflict.

ans =

     1     5     6
     2     1     5
     3     2     1
     4     3     2
```

Create a Toeplitz matrix with complex row and column vectors.

```
c = [1+3i 2-5i -1+3i];
r = [1+3i 3-1i -1-2i];
T = toeplitz(c,r)
```

```
T =
   1.0000 + 3.0000i   3.0000 - 1.0000i  -1.0000 - 2.0000i
   2.0000 - 5.0000i   1.0000 + 3.0000i   3.0000 - 1.0000i
  -1.0000 + 3.0000i   2.0000 - 5.0000i   1.0000 + 3.0000i
```

Create Circulant Matrices Using `toeplitz` Function

You can create circulant matrices using `toeplitz`. Circulant matrices are used in applications such as circular convolution.

Create a circulant matrix from vector `v` using toeplitz.

```
v = [9 1 3 2];
```

```
toeplitz([v(1) fliplr(v(2:end))], v)
```

```
ans =

     9     1     3     2
     2     9     1     3
     3     2     9     1
     1     3     2     9
```

Perform discrete-time circular convolution by using `toeplitz` to form the circulant matrix for convolution.

Define the periodic input `x` and the system response `h`.

```
x = [1 8 3 2 5];
h = [3 5 2 4 1];
```

Form the column vector `c` to create a circulant matrix where `length(c) = length(h)`.

```
c = [x(1) fliplr(x(end-length(h)+2:end))]
```

```
c =

     1     5     2     3     8
```

Form the row vector `r` from `x`.

```
r = x;
```

Form the convolution matrix `xConv` using `toeplitz`. Find the convolution using `h*xConv`.

```
xConv = toeplitz(c,r)
```

```
xConv =

     1     8     3     2     5
     5     1     8     3     2
     2     5     1     8     3
     3     2     5     1     8
     8     3     2     5     1
```

```
h*xConv
```

```
ans =

    52    50    73    46    64
```

If you have the Signal Processing Toolbox™, you can use the cconv (Signal Processing Toolbox) function to find the circular convolution.

Discrete-Time Convolution Using `Toeplitz`

Perform discrete-time convolution by using `toeplitz` to form the arrays for convolution.

Define the input `x` and system response `h`.

```
x = [1 8 3 2 5];
h = [3 5 2];
```

Form `r` by padding `x` with zeros. The length of `r` is the convolution length `x + h - 1`.

```
r = [x zeros(1,length(h)-1)]

r =

     1     8     3     2     5     0     0
```

Form the column vector `c`. Set the first element to `x(1)` because the column determines the diagonal. Pad `c` because `length(c)` must equal `length(h)` for convolution.

```
c = [x(1) zeros(1,length(h)-1)]

c =

     1     0     0
```

Form the convolution matrix `xConv` using `toeplitz`. Then, find the convolution using `h*xConv`.

```
xConv = toeplitz(c,r)

xConv =
```

```
     1     8     3     2     5     0     0
     0     1     8     3     2     5     0
     0     0     1     8     3     2     5
```

```
h*xConv
```

```
ans =

     3    29    51    37    31    29    10
```

Check that the result is correct using `conv`.

```
conv(x,h)
```

```
ans =

     3    29    51    37    31    29    10
```

Input Arguments

`c` — Column of Toeplitz matrix

scalar | vector

Column of Toeplitz matrix, specified as a scalar or vector. If the first elements of `c` and `r` differ, `toeplitz` uses the column element for the diagonal.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`
Complex Number Support: Yes

`r` — Row of Toeplitz matrix

scalar | vector

Row of Toeplitz matrix, specified as a scalar or vector. If the first elements of `c` and `r` differ, then `toeplitz` uses the column element for the diagonal.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`
Complex Number Support: Yes

Definitions

Toeplitz Matrix

A Toeplitz matrix is a diagonal-constant matrix, which means all elements along a diagonal have the same value. For a Toeplitz matrix A, we have $A_{i,j} = a_{i-j}$ which results in the form

$$A = \begin{bmatrix} a_0 & a_{-1} & a_{-2} & \cdots & \cdots & a_{1-n} \\ a_1 & a_0 & a_{-1} & \ddots & \ddots & \vdots \\ a_2 & a_1 & a_0 & \ddots & \ddots & \vdots \\ \vdots & \ddots & \ddots & \ddots & \ddots & a_{-3} \\ \vdots & \ddots & \ddots & \ddots & a_0 & a_{-1} \\ a_{n-1} & \cdots & \cdots & a_2 & a_1 & a_0 \end{bmatrix}.$$

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`hankel` | `kron`

Introduced before R2006a

toolboxdir

Root folder for specified toolbox

Syntax

```
toolboxdir('tbxFolderName')
s = toolboxdir('tbxFolderName')
s = toolboxdir tbxFolderName
```

Description

`toolboxdir('tbxFolderName')` returns a character vector containing the absolute path to the specified toolbox, `tbxFolderName`, where `tbxFolderName` is the folder name for the toolbox.

`s = toolboxdir('tbxFolderName')` returns the absolute path to the specified toolbox to the output argument, `s`.

`s = toolboxdir tbxFolderName` is the command form of the syntax.

Examples

Obtain the path for the Control System Toolbox software:

```
s = toolboxdir('control')
```

MATLAB returns:

```
s = C:\Program Files\MATLAB\R2012a\toolbox\control
```

Tips

`toolboxdir` is particularly useful for MATLAB Compiler software. The base folder of all toolboxes installed with MATLAB software is:

matlabroot/**toolbox**/tbxFolderName

However, in deployed mode, the base folders of the toolboxes are different. `toolboxdir` returns the correct root folder, whether running from MATLAB or from an application deployed with the MATLAB Compiler software.

To determine the folder name for a given toolbox, run the following code, substituting the name of a product function for *toolbxfcn*:

```
n = 'toolbxfcn';
pat = '(?<=^.+[\\/]toolbox[\\/])[^\\/]+';
regexp(which(n), pat, 'match', 'once')
```

For example, to determine the product name for Control System Toolbox set `n` to the name of a function unique to Control System Toolbox, such as `dss`:

```
n = 'dss'
pat = '(?<=^.+[\\/]toolbox[\\/])[^\\/]+'
regexp(which(n), pat, 'match', 'once')
```

```
control
```

See Also

`fullfile` | `path` | `matlabroot`

Introduced in R2006a

topkrows

Top rows in sorted order

Syntax

```
T = topkrows(X,k)
T = topkrows(X,k,col)
T = topkrows(X,k,col,direction)

T = topkrows(TT,k)
T = topkrows(TT,k,vars)
T = topkrows(TT,k,vars,direction)
```

Description

`T = topkrows(X,k)` returns the first `k` rows in tall array `X` sorted in descending order (for numeric data) or reverse alphabetical order (for text data).

`T = topkrows(X,k,col)` returns the first `k` rows in tall array `X` sorted in descending order by the columns specified by `col`. Use this syntax to perform multiple column sorts in succession.

`T = topkrows(X,k,col,direction)` specifies the direction of the sorting. For example, use `'ascend'` to sort `X` in ascending order.

`T = topkrows(TT,k)` returns the first `k` rows in tall table or tall timetable `TT` in sorted order. Table rows are in descending sorted order by all of their variables, and timetable rows are in descending sorted order by time.

`T = topkrows(TT,k,vars)` returns the first `k` rows in tall table or tall timetable `TT` sorted by the variables specified by `vars`.

`T = topkrows(TT,k,vars,direction)` specifies the direction of the sorting. For example, use `'ascend'` to sort `TT` in ascending order.

Examples

Sort Rows of Tall Matrix

Sort the rows of a tall matrix using different sorting orders, return the top rows, and view the results.

Create a 100-by-5 matrix of random integers. Convert the in-memory array into a tall array.

```
X = randi(20,100,5);
TX = tall(X)
```

```
TX =

  100×5 tall double matrix

    17     4    13     2     9
    19    16     8    14     2
     3     7    17     1    12
    19    11    11     2    10
    13     4     8    11    14
     2    13    19     2    14
     6     6    18    17    13
    11    14    12    17     1
    :     :     :     :     :
    :     :     :     :     :
```

Sort the rows of `TX` in descending order and return the top 15 rows. By default, `topkrows` sorts using the first column of the matrix. For any rows that have equal elements in a particular column, the sorting is based on the column immediately to the right. Collect the values into memory to view the complete results.

```
TA = topkrows(TX,15)
```

```
TA =

  15×5 tall double matrix

    20    15    12     3     7
    20    14    13    15     2
    20    11     9    10    14
    20     9     9     3    13
    20     7    14     4     7
```

```
    20     5    10    20     9
    20     3     6     8    13
    20     2     7    11    14
     :     :     :     :     :
     :     :     :     :     :
```

```
T1 = gather(TA)
```

```
Evaluating tall expression using the Local MATLAB Session:

Evaluation completed in 0 sec

T1 =

    20    15    12     3     7
    20    14    13    15     2
    20    11     9    10    14
    20     9     9     3    13
    20     7    14     4     7
    20     5    10    20     9
    20     3     6     8    13
    20     2     7    11    14
    19    20     4    17     7
    19    16     8    14     2
```

When called with three input arguments, `topkrows` bases the sort entirely on the column specified in the third argument.

Sort `TX` in descending order using the values in the third column, and return the top 20 rows. Collect the values into memory to view the complete results.

```
TB = topkrows(TX,20,3)
```

```
TB =

  20×5 tall double matrix

    16    18    20     8     6
     6     9    20     7    19
     5     3    20     4     1
    12    11    20     9    17
     2    13    19     2    14
     1    20    19     8     9
    14    17    19     2     4
```

```
     4     9    19     6     7
     :     :     :     :     :
     :     :     :     :     :
```

```
T2 = gather(TB)
```

```
Evaluating tall expression using the Local MATLAB Session:

Evaluation completed in 0 sec

T2 =

    16    18    20     8     6
     6     9    20     7    19
     5     3    20     4     1
    12    11    20     9    17
     2    13    19     2    14
     1    20    19     8     9
    14    17    19     2     4
     4     9    19     6     7
    11     5    19    18    10
     7     4    19     3    12
```

If you sort using only one column, then rows that have equal values in the specified column remain in their original order.

Specify two columns to sort by; for example, columns 3 and 4. Collect the values into memory to view the complete results.

```
TC = topkrows(TX,20,[3 4])
```

```
TC =

  20×5 tall double matrix

    12    11    20     9    17
    16    18    20     8     6
     6     9    20     7    19
     5     3    20     4     1
    11     5    19    18    10
    19    14    19    17     5
     1    20    19     8     9
     4     9    19     6     7
     :     :     :     :     :
```

```
     :     :    :      :     :
```

```
T3 = gather(TC)
```

```
Evaluating tall expression using the Local MATLAB Session:

Evaluation completed in 0 sec

T3 =

    12    11    20     9    17
    16    18    20     8     6
     6     9    20     7    19
     5     3    20     4     1
    11     5    19    18    10
    19    14    19    17     5
     1    20    19     8     9
     4     9    19     6     7
     7     4    19     3    12
     2    13    19     2    14
```

`topkrows` sorts by column 3, and then for any rows with equal values in column 3, sorts by column 4.

Specify Sorting Directions for Matrix Rows

Sort a tall matrix using several columns with different sorting directions.

Create a 100-by-5 matrix of random integers. Convert the in-memory array into a tall array.

```
X = randi(10,100,5);
TX = tall(X)
```

```
TX =

  100×5 tall double matrix

     9     2     7     1     5
    10     8     4     7     1
     2     4     9     1     6
    10     6     6     1     5
     7     2     4     6     7
```

```
     1     7    10     1     7
     3     3     9     9     7
     6     7     6     9     1
     :     :     :     :     :
     :     :     :     :     :
```

Sort TX using the first three columns and return the top 12 rows. Specify the sorting direction for each column. Collect the values into memory to view the compete results.

```
T = topkrows(TX,12,1:3,{'descend','ascend','ascend'})
```

```
T =

  12×5 tall double matrix

    10     1     4     6     7
    10     1     8     5     1
    10     2     3     4     7
    10     3     5    10     5
    10     4     7     2     4
    10     5     5     2     7
    10     5     5     6     7
    10     6     5     5     7
    :      :     :     :     :
    :      :     :     :     :
```

```
T12 = gather(T)
```

```
Evaluating tall expression using the Local MATLAB Session:

Evaluation completed in 0 sec

T12 =

    10     1     4     6     7
    10     1     8     5     1
    10     2     3     4     7
    10     3     5    10     5
    10     4     7     2     4
    10     5     5     2     7
    10     5     5     6     7
    10     6     5     5     7
    10     6     6     1     5
    10     7     7     8     1
```

Sort Rows of Tall Cell Array

Sort text in a tall cell array of character vectors.

Create a tall cell array using the `UniqueCarrier` text data in the `airlinesmall.csv` data set.

```
ds = datastore('airlinesmall.csv','SelectedVariableNames','UniqueCarrier');
tt = tall(ds);
A = tt.UniqueCarrier
```

```
A =

  M×1 tall cell array

    'PS'
    'PS'
    'PS'
    'PS'
    'PS'
    'PS'
    'PS'
    'PS'
    :
    :
```

Sort the rows of `C` and return the top 10 rows. Collect the values into memory to view the results.

```
b = topkrows(A,10)
```

```
b =

  M×1 tall cell array

    ?
    ?
    ?
    :
    :
```

```
B = gather(b)
```

```
Evaluating tall expression using the Local MATLAB Session:
```

```
- Pass 1 of 1: Completed in 0 sec

Evaluation completed in 0 sec

B = 10×1 cell array
    'YV'
    'YV'
    'YV'
    'YV'
    'YV'
    'YV'
    'YV'
    'YV'
    'YV'
    'YV'
```

By default `topkrows` sorts in reverse alphabetical order. Specify `ascend` as the fourth input to sort in alphabetical order.

```
c = topkrows(A,10,1,'ascend')
```

```
c =

  M×1 tall cell array

    ?
    ?
    ?
    :
    :
```

```
C = gather(c)
```

```
Evaluating tall expression using the Local MATLAB Session:

- Pass 1 of 1: Completed in 0 sec

Evaluation completed in 0 sec

C = 10×1 cell array
    '9E'
    '9E'
    '9E'
    '9E'
    '9E'
```

```
    '9E'
    '9E'
    '9E'
    '9E'
    '9E'
```

Sort Rows of Tall Table

Sort rows of heterogeneous data in a tall table.

Create a tall table for the `airlinesmall.csv` data set. Select the `Year`, `Month`, and `UniqueCarrier` variables as the variables of interest.

```
ds = datastore('airlinesmall.csv','SelectedVariableNames',...
    {'Year','Month','UniqueCarrier'});
tt = tall(ds)
```

```
tt =

  M×3 tall table

    Year    Month    UniqueCarrier
    ____    _____    _____________

    1987    10       'PS'
    1987    10       'PS'
    1987    10       'PS'
    1987    10       'PS'
    1987    10       'PS'
    1987    10       'PS'
    1987    10       'PS'
    1987    10       'PS'
    :       :        :
    :       :        :
```

Sort the table rows in descending order and return the top 15 rows. Collect the values into memory to view the results.

```
T = topkrows(tt,15)
```

```
T =

  M×3 tall table
```

```
    Year    Month    UniqueCarrier
    ____    _____    _____________

    ?       ?        ?
    ?       ?        ?
    ?       ?        ?
    :       :        :
    :       :        :
```

```
top15 = gather(T)
```

```
Evaluating tall expression using the Local MATLAB Session:

- Pass 1 of 1: Completed in 1 sec

Evaluation completed in 1 sec

top15 = 15×3 table
    Year    Month    UniqueCarrier
    ____    _____    _____________

    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
    2008    12       'YV'
```

Sort the table rows using an alphabetical sort of the `UniqueCarrier` variable.

```
T2 = topkrows(tt,10,'UniqueCarrier','ascend')
```

```
T2 =
```

```
  M×3 tall table

    Year    Month    UniqueCarrier
    ____    _____    _____________

    ?       ?        ?
    ?       ?        ?
    ?       ?        ?
    :       :        :
    :       :        :
```

```
top10 = gather(T2)
```

```
Evaluating tall expression using the Local MATLAB Session:

- Pass 1 of 1: Completed in 0 sec

Evaluation completed in 0 sec

top10 = 10×3 table
    Year    Month    UniqueCarrier
    ____    _____    _____________

    2007    1        '9E'
    2007    1        '9E'
    2007    1        '9E'
    2007    1        '9E'
    2007    1        '9E'
    2007    1        '9E'
    2007    1        '9E'
    2007    1        '9E'
    2007    1        '9E'
    2007    1        '9E'
```

Input Arguments

X — Input array

tall array

Input array, specified as a tall array. The underlying data type of X can be numeric, `logical`, `char`, `string`, `cell`, `datetime`, or `duration`.

- If `X` contains `NaN` or `NaT` values, then `topkrows` places them on the high end of the sort (as if they were large numbers).
- If `X` contains complex numbers, then `topkrows` sorts them by magnitude and, where magnitudes are equal, further sorts by phase angle on the interval [−π, π].
- If `X` is a cell array, then it must contain either all numeric values or all character vectors.

Complex Number Support: Yes

`TT` — Input table

tall table | tall timetable

Input table, specified as a tall table or tall timetable.

`k` — Number of rows to return

scalar

Number of rows to return, specified as a positive scalar integer.

`col` — Columns to sort by

scalar | vector

Columns to sort by, specified as a scalar positive integer or a vector of positive integers.

Example: `T = topkrows(X,100,[1 3])` sorts over the first and third columns before returning the top 100 rows.

`vars` — Variables to sort by

scalar | vector | variable name | cell array

Variables to sort by, specified as a positive integer, a vector of positive integers, a logical vector, a variable name, or a cell array containing one or more variable names.

Example: `T = topkrows(X,k,[1 3])` sorts over the first and third columns.

Example: `T = topkrows(X,k,'Year')` sorts using the `Year` variable.

`direction` — Sorting direction

`'descend'` (default) | `'ascend'` | cell array

Sorting direction, specified as either `'descend'`, `'ascend'`, or a cell array that specifies `'descend'` or `'ascend'` for each sorting column specified by `col` or `vars`.

Output Arguments

T — Requested rows
unevaluated tall array

Requested rows, returned as an unevaluated tall array of the same size and underlying class as X or TT. To calculate T and bring it into memory, use gather(T). For more information, see "Deferred Evaluation of Tall Arrays".

Algorithms

topkrows does not do a full sort of the input data. Instead, the algorithm retrieves the top few rows from each partition of data using local sorts. These intermediate results, which are significantly smaller than the original data, are then combined and fully sorted to produce the final result.

See Also

See Also
gather | head | sortrows | tail | tall

Topics
"Tall Arrays"
"Functions That Support Tall Arrays (A–Z)"
"Index and View Tall Array Elements"

Introduced in R2016b

trace

Sum of diagonal elements

Syntax

```
b = trace(A)
```

Description

`b = trace(A)` is the sum of the diagonal elements of the matrix `A`.

Algorithms

```
t = sum(diag(A));
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`det` | `eig`

Introduced before R2006a

transpose, .'

Transpose vector or matrix

Syntax

```
B = A.'
B = transpose(A)
```

Description

`B = A.'` returns the nonconjugate transpose of `A`, that is, interchanges the row and column index for each element. If `A` contains complex elements, then `A.'` does not affect the sign of the imaginary parts. For example, if `A(3,2)` is `1+2i` and `B = A.'`, then the element `B(2,3)` is also `1+2i`.

`B = transpose(A)` is an alternate way to execute `A.'` and enables operator overloading for classes.

Examples

Real Matrix

Create a matrix of real numbers and compute its transpose. `B` has the same elements as `A`, but the rows of `B` are the columns of `A` and the columns of `B` are the rows of `A`.

```
A = magic(4)
```

```
A =

    16     2     3    13
     5    11    10     8
     9     7     6    12
     4    14    15     1
```

```
B = A.'
```

```
B =

    16     5     9     4
     2    11     7    14
     3    10     6    15
    13     8    12     1
```

Complex Matrix

Create a matrix containing complex elements and compute its nonconjugate transpose. B contains the same elements as A, except the rows and columns are interchanged. The signs of the imaginary parts are unchanged.

```
A = [1 3 4-1i 2+2i; 0+1i 1-1i 5 6-1i]
```

```
A =
   1.0000 + 0.0000i   3.0000 + 0.0000i   4.0000 - 1.0000i   2.0000 + 2.0000i
   0.0000 + 1.0000i   1.0000 - 1.0000i   5.0000 + 0.0000i   6.0000 - 1.0000i
```

```
B = A.'
```

```
B =
   1.0000 + 0.0000i   0.0000 + 1.0000i
   3.0000 + 0.0000i   1.0000 - 1.0000i
   4.0000 - 1.0000i   5.0000 + 0.0000i
   2.0000 + 2.0000i   6.0000 - 1.0000i
```

Input Arguments

A — Input array

vector | matrix

Input array, specified as a vector or matrix.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `cell` | `categorical` | `datetime` | `duration` | `calendarDuration`
Complex Number Support: Yes

Tips

- The complex conjugate transpose operator, `A'`, also negates the sign of the imaginary part of the complex elements in `A`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`conj` | `ctranspose` | `permute`

Topics

"Array vs. Matrix Operations"
"Operator Precedence"
"MATLAB Operators and Special Characters"

Introduced before R2006a

trapz

Trapezoidal numerical integration

Syntax

```
Q = trapz(Y)
Q = trapz(X,Y)
Q = trapz( ___ ,dim)
```

Description

`Q = trapz(Y)` returns the approximate integral of `Y` via the trapezoidal method with unit spacing. The size of `Y` determines the dimension to integrate along:

- If `Y` is a vector, then `trapz(Y)` is the approximate integral of `Y`.
- If `Y` is a matrix, then `trapz(Y)` integrates over each column and returns a row vector of integration values.
- If `Y` is a multidimensional array, then `trapz(Y)` integrates over the first dimension whose size does not equal 1. The size of this dimension becomes 1, and the sizes of other dimensions remain unchanged.

`Q = trapz(X,Y)` integrates `Y` with spacing increment `X`. By default, `trapz` operates on the first dimension of `Y` whose size does not equal 1. `length(X)` must be equal to the size of this dimension . If `X` is a scalar, then `trapz(X,Y)` is equivalent to `X*trapz(Y)`.

`Q = trapz( ___ ,dim)` integrates along the dimension `dim` using any of the previous syntaxes. You must specify `Y`, and optionally can specify `X`. The length of `X`, if specified, must be the same as `size(Y,dim)`. For example, if `Y` is a matrix, then `trapz(X,Y,2)` integrates each row of `Y`.

Examples

Integrate Vector of Data with Unit Spacing

Create a numeric vector of data.

```
Y = [1 4 9 16 25];
```

Y contains function values for $f(x) = x^2$ in the domain [1,5].

Use trapz to integrate the data points with unit spacing.

```
Q = trapz(Y)
```

```
Q = 42
```

This approximate integration yields a value of 42. In this case, the exact answer is a little less, $41\frac{1}{3}$. The trapz function overestimates the value of the integral because *f(x)* is concave up.

Integrate Vector of Data with Nonunit Spacing

Create a domain vector, X.

```
X = 0:pi/100:pi;
```

Calculate the sine of X and store the result in Y.

```
Y = sin(X);
```

Integrate the function values contained in Y using trapz.

```
Q = trapz(X,Y)
```

```
Q = 1.9998
```

When the spacing between points is constant, but not equal to 1, you can multiply by the spacing value, in this case pi/100*trapz(Y). The answer is the same if you pass the value directly to the function with trapz(X,Y).

Integrate Matrix with Nonuniform Spacing

Create a vector of time values, X. Also create a matrix, Y, containing values evaluated at the irregular intervals in X.

```
X = [1 2.5 7 10]';
Y = [5.2 4.8 4.9 5.1; 7.7 7.0 6.5 6.8; 9.6 10.5 10.5 9.0; 13.2 14.5 13.8 15.2]
```

```
Y =

    5.2000    4.8000    4.9000    5.1000
    7.7000    7.0000    6.5000    6.8000
    9.6000   10.5000   10.5000    9.0000
   13.2000   14.5000   13.8000   15.2000
```

The columns of `Y` represent velocity data, taken at the times contained in `X`, for several different trials.

Use `trapz` to integrate each column independently and find the total distance traveled in each trial. Since the function values are not evaluated at constant intervals, specify `X` to indicate the spacing between the data points.

```
Q = trapz(X,Y)
```

```
Q =

   82.8000   85.7250   83.2500   80.7750
```

The result is a row vector of integration values, one for each column in `Y`. By default, `trapz` integrates along the first dimension of `Y` whose size does not equal 1.

Alternatively, you can integrate the rows of a matrix by specifying `dim = 2`.

In this case, use `trapz` on `Y'`, which contains the velocity data in the rows.

```
dim = 2;
Q1 = trapz(X,Y',dim)
```

```
Q1 =

   82.8000
   85.7250
   83.2500
   80.7750
```

The result is a column vector of integration values, one for each row in `Y'`.

Multiple Numerical Integrations

Created a grid of domain values.

```
x = -3:.1:3;
y = -5:.1:5;
[X,Y] = meshgrid(x,y);
```

Calculate the function $f(x, y) = x^2 + y^2$ over the grid.

```
F = X.^2 + Y.^2;
```

`trapz` integrates numeric data rather than functional expressions, so in general the expression does not need to be known to use `trapz` on a matrix of data.

Use `trapz` to approximate the double integral

$$I = \int_{-5}^{5} \int_{-3}^{3} \left(x^2 + y^2\right) dx\, dy$$

To perform double or triple integrations on an array of numeric data, nest function calls to `trapz`.

```
I = trapz(y,trapz(x,F,2))
```

```
I = 680.2000
```

`trapz` performs the integration over *x* first, producing a column vector. Then, the integration over *y* reduces the column vector to a single scalar. `trapz` slightly overestimates the exact answer of 680 because *f(x,y)* is concave up.

Input Arguments

Y — Numeric data

vector | matrix | multidimensional array

Numeric data, specified as a vector, matrix, or multidimensional array. By default, `trapz` integrates along the first dimension of `Y` whose size does not equal 1.

Data Types: `single` | `double`
Complex Number Support: Yes

X — Point spacing

1 (default) | uniform scalar spacing | vector of nonuniform spacings

Point spacing, specified as `1` (default), a uniform scalar spacing, or a vector of nonuniform spacings. If `X` is a vector, then `length(X)` must be the same as the size of the integration dimension in `Y`.

Data Types: `single` | `double`
Complex Number Support: Yes

`dim` — Dimension to operate along
positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Consider a two-dimensional input array, `Y`:

- `trapz(Y,1)` works on successive elements in the columns of `Y` and returns a row vector of integration values.

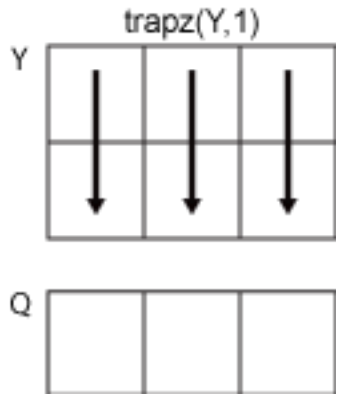

- `trapz(Y,2)` works on successive elements in the rows of `Y` and returns a column vector of integration values.

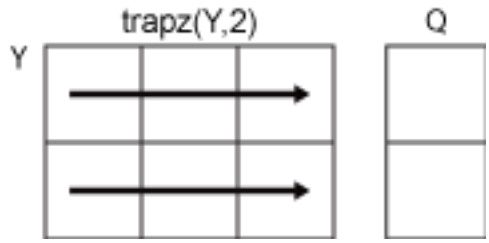

If `dim` is greater than `ndims(Y)`, then `trapz` returns an array of zeros of the same size as `Y`.

Definitions

Trapezoidal Method

`trapz` performs numerical integration via the trapezoidal method. This method approximates the integration over an interval by breaking the area down into trapezoids with more easily computable areas.

For an integration with `N+1` evenly spaced points, the approximation is

$$\int_a^b f(x)dx \approx \frac{b-a}{2N}\sum_{n=1}^{N}\left(f(x_n)+f(x_{n+1})\right)$$
$$=\frac{b-a}{2N}\left[f(x_1)+2f(x_2)+\ldots+2f(x_N)+f(x_{N+1})\right],$$

where the spacing between each point is equal to the scalar value $\frac{b-a}{N}$.

If the spacing between the points is not constant, then the formula generalizes to

$$\int_a^b f(x)dx \approx \frac{1}{2}\sum_{n=1}^{N}(x_{n+1}-x_n)\left[f(x_n)+f(x_{n+1})\right],$$

where $(x_{n+1}-x_n)$ is the spacing between each consecutive pair of points.

Tips

- Use `trapz` and `cumtrapz` to perform numerical integrations on discrete data sets. Use `integral`, `integral2`, or `integral3` instead if a functional expression for the data is available.

- `trapz` reduces the size of the dimension it operates on to 1, and returns only the final integration value. `cumtrapz` also returns the intermediate integration values, preserving the size of the dimension it operates on.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you supply `dim`, then it must be a constant.
- See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).

See Also

See Also

`cumsum` | `cumtrapz` | `integral` | `integral2` | `integral3`

Topics

"Integration of Numeric Data"

Introduced before R2006a

treelayout

Lay out tree or forest

Syntax

```
[x,y] = treelayout(parent,post)
[x,y,h,s] = treelayout(parent,post)
```

Description

`[x,y] = treelayout(parent,post)` lays out a tree or a forest. `parent` is the vector of parent pointers, with `0` for a root. `post` is an optional postorder permutation on the tree nodes. If you omit `post`, `treelayout` computes it. `x` and `y` are vectors of coordinates in the unit square at which to lay out the nodes of the tree to make a nice picture.

`[x,y,h,s] = treelayout(parent,post)` also returns the height of the tree `h` and the number of vertices `s` in the top-level separator.

See Also

`etree` | `treeplot` | `etreeplot` | `symbfact`

Introduced before R2006a

treeplot

Plot picture of tree

Syntax

```
treeplot(p)
treeplot(p,nodeSpec,edgeSpec)
```

Description

`treeplot(p)` plots a picture of a tree given a vector of parent pointers, with `p(i)` = 0 for a root.

`treeplot(p,nodeSpec,edgeSpec)` allows optional parameters `nodeSpec` and `edgeSpec` to set the node or edge color, marker, and linestyle. Use `''` to omit one or both.

Examples

To plot a tree with 12 nodes, call `treeplot` with a 12-element input vector. The index of each element in the vector is shown adjacent to each node in the figure below. (These indices are shown only for the point of illustrating the example; they are not part of the `treeplot` output.)

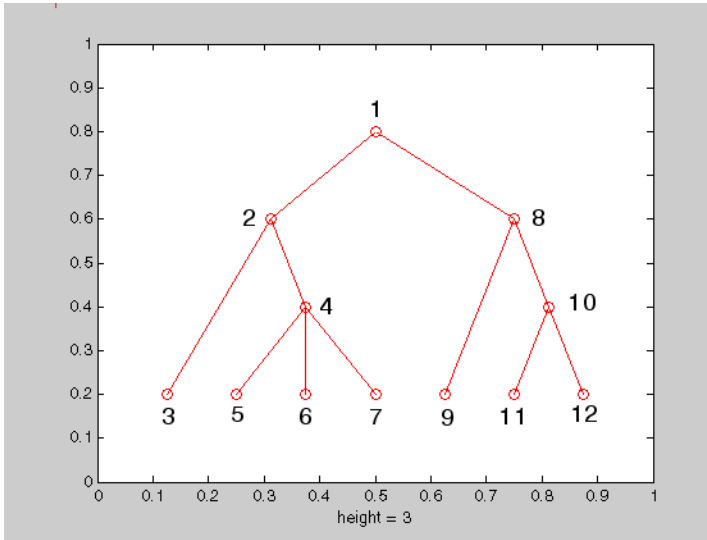

To generate this plot, set the value of each element in the `nodes` vector to the index of its parent, (setting the parent of the root node to zero).

The node marked `1` in the figure is represented by `nodes(1)` in the input vector, and because this is the root node which has a parent of zero, you set its value to zero:

```
nodes(1) = 0;      % Root node
```

`nodes(2)` and `nodes(8)` are children of `nodes(1)`, so set these elements of the input vector to `1`:

```
nodes(2) = 1;      nodes(8) = 1;
```

`nodes(5:7)` are children of `nodes(4)`, so set these elements to `4`:

```
nodes(5) = 4;      nodes(6) = 4;      nodes(7) = 4;
```

Continue in this manner until each element of the vector identifies its parent. For the plot shown above, the `nodes` vector now looks like this:

```
nodes = [0 1 2 2 4 4 4 1 8 8 10 10];
```

Now call `treeplot` to generate the plot:

```
treeplot(nodes)
```

See Also

`etree` | `etreeplot` | `treelayout`

Introduced before R2006a

tril

Lower triangular part of matrix

Syntax

```
L = tril(X)
L = tril(X,k)
```

Description

`L = tril(X)` returns the lower triangular part of `X`.

`L = tril(X,k)` returns the elements on and below the kth diagonal of `X`. `k = 0` is the main diagonal, `k > 0` is above the main diagonal, and `k < 0` is below the main diagonal.

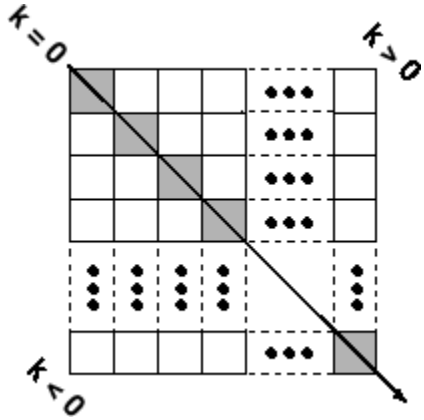

Examples

```
tril(ones(4,4),-1)

ans =
```

```
     0     0     0     0
     1     0     0     0
     1     1     0     0
     1     1     1     0
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you supply the argument that represents the order of the diagonal matrix, then it must be a real and scalar integer value.

See Also

`diag` | `triu`

Introduced before R2006a

trimesh

Triangular mesh plot

Syntax

```
trimesh(Tri,X,Y,Z,C)
trimesh(Tri,X,Y,Z)
trimesh(Tri,X,Y)
trimesh(TR)
trimesh(...'PropertyName',PropertyValue...)
h = trimesh(...)
```

Description

`trimesh(Tri,X,Y,Z,C)` displays triangles defined in the *m*-by-3 face matrix `Tri` as a mesh. Each row of `Tri` defines a single triangular face by indexing into the vectors or matrices that contain the `X`, `Y`, and `Z` vertices. The edge color is defined by the vector `C`.

`trimesh(Tri,X,Y,Z)` uses `C = Z` so color is proportional to surface height.

`trimesh(Tri,X,Y)` displays the triangles in a 2-D plot.

`trimesh(TR)` displays the triangles in a triangulation representation.

`trimesh(...'PropertyName',PropertyValue...)` specifies additional patch property names and values for the patch graphics object created by the function.

`h = trimesh(...)` returns a handle to the displayed triangles.

Examples

Create Triangular Mesh Plot

Create vertex vectors and a face matrix, and then create a triangular mesh plot.

```
[x,y] = meshgrid(1:15,1:15);
tri = delaunay(x,y);
z = peaks(15);
trimesh(tri,x,y,z)
```

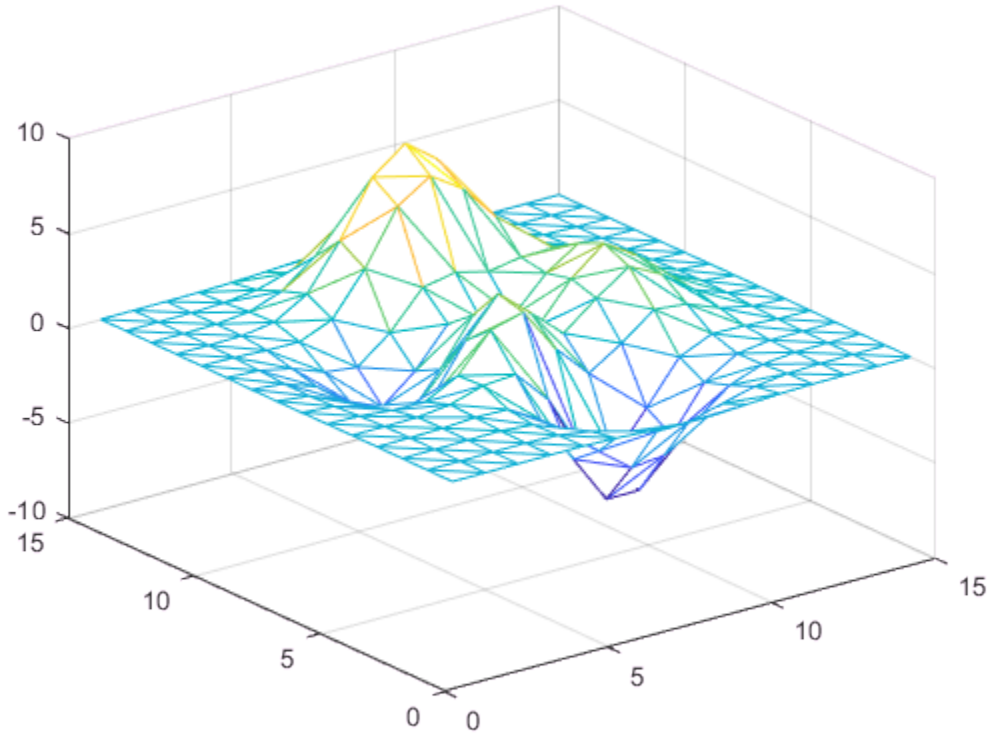

If the surface is already a triangulation representation, then you can pass the triangulation to `trimesh`:

```
tr = triangulation(tri,x(:),y(:),z(:));
trimesh(tr)
```

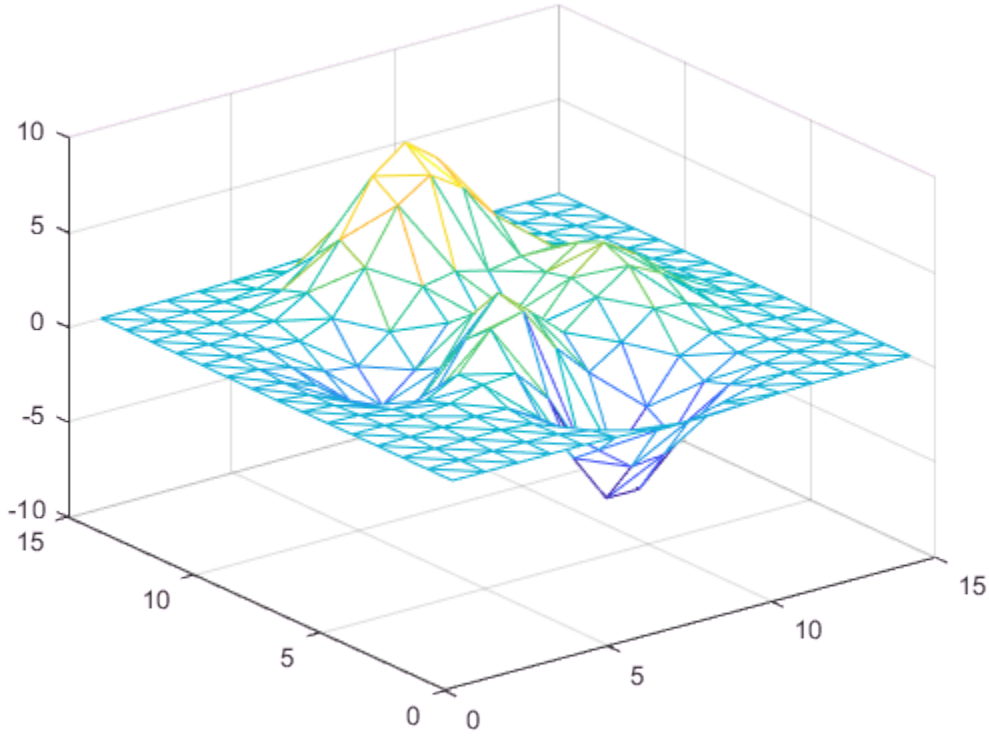

See Also

`patch` | `trisurf` | triangulation | `delaunay` | delaunayTriangulation

Introduced before R2006a

triplequad

Numerically evaluate triple integral

Compatibility

`triplequad` will be removed in a future release. Use `integral3` instead.

Syntax

```
q = triplequad(fun,xmin,xmax,ymin,ymax,zmin,zmax)
q = triplequad(fun,xmin,xmax,ymin,ymax,zmin,zmax,tol)
q = triplequad(fun,xmin,xmax,ymin,ymax,zmin,zmax,tol,method)
```

Description

`q = triplequad(fun,xmin,xmax,ymin,ymax,zmin,zmax)` evaluates the triple integral `fun(x,y,z)` over the three dimensional rectangular region `xmin <= x <= xmax`, `ymin <= y <= ymax`, `zmin <= z <= zmax`. The first input, `fun`, is a function handle. `fun(x,y,z)` must accept a vector `x` and scalars `y` and `z`, and return a vector of values of the integrand.

"Parameterizing Functions" explains how to provide additional parameters to the function `fun`, if necessary.

`q = triplequad(fun,xmin,xmax,ymin,ymax,zmin,zmax,tol)` uses a tolerance `tol` instead of the default, which is `1.0e-6`.

`q = triplequad(fun,xmin,xmax,ymin,ymax,zmin,zmax,tol,method)` uses the quadrature function specified as `method`, instead of the default `quad`. Valid values for `method` are `@quadl` or the function handle of a user-defined quadrature method that has the same calling sequence as `quad` and `quadl`.

Examples

Pass function handle `@integrnd` to `triplequad`:P

```
Q = triplequad(@integrnd,0,pi,0,1,-1,1);
```

where the file `integrnd.m` is

```
function f = integrnd(x,y,z)
f = y*sin(x)+z*cos(x);
```

Pass anonymous function handle `F` to `triplequad`:

```
F = @(x,y,z)y*sin(x)+z*cos(x);
Q = triplequad(F,0,pi,0,1,-1,1);
```

This example integrates `y*sin(x)+z*cos(x)` over the region `0 <= x <= pi`, `0 <= y <= 1`, `-1 <= z <= 1`. Note that the integrand can be evaluated with a vector `x` and scalars `y` and `z`.

See Also

See Also

`dblquad` | `integral` | `integral2` | `integral3` | `quad` | `quad2d` | `quadgk` | `quadl`

Topics

"Anonymous Functions"
"Create Function Handle"

Introduced before R2006a

triplot

2-D triangular plot

Note: The behavior of `h = triplot(...)` has changed. The new behavior returns a single chart line handle.

Syntax

```
triplot(TRI,x,y)
triplot(TRI,x,y,color)
triplot(TR)
h = triplot(...)
triplot(...,'param','value','param','value'...)
```

Description

`triplot(TRI,x,y)` displays the triangles defined in the `m`-by-3 matrix `TRI`. A row of `TRI` contains indices into the vectors `x` and `y` that define a single triangle. The default line color is blue.

`triplot(TRI,x,y,color)` specifies `color` as the line color. `color` can also be a line specification. See `ColorSpec` for a list of valid colors. See `LineSpec` for information about line specifications.

`triplot(TR)` displays the triangles in a triangulation representation.

`h = triplot(...)` returns a single chart line handle to the displayed triangles.

`triplot(...,'param','value','param','value'...)` allows additional line property name/property value pairs to be used when creating the plot. See Chart Line Properties for information about the available properties.

Examples

Plot Delaunay Triangulation

Plot a Delaunay triangulation for 10 randomly generated points.

```
P = gallery('uniformdata',10,2,2);
DT = delaunayTriangulation(P);
triplot(DT)
```

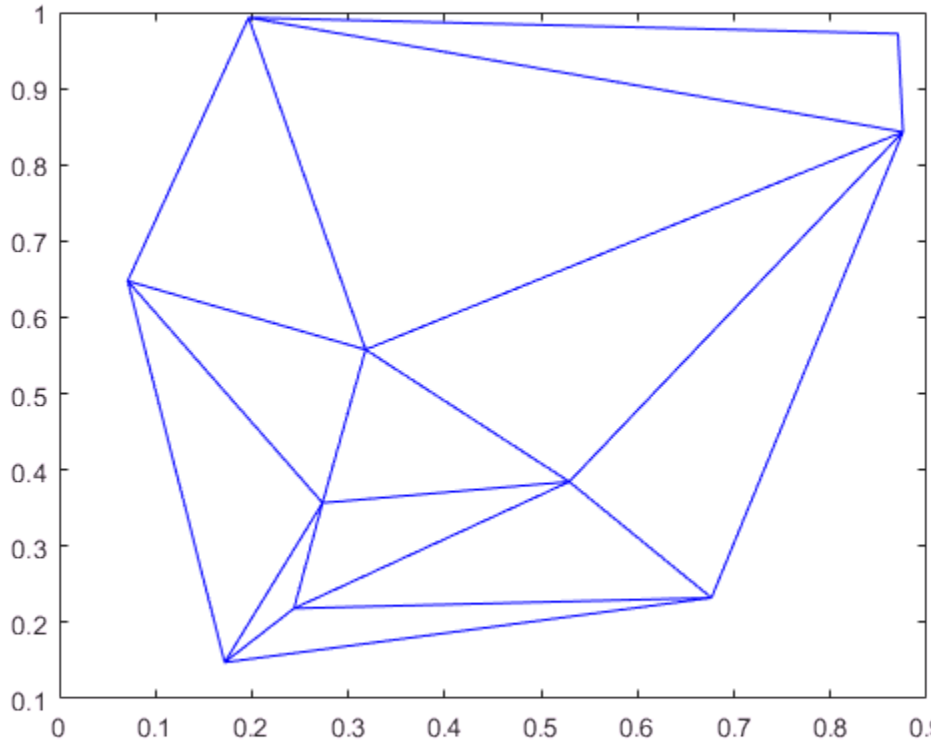

See Also

delaunayTriangulation | triangulation | `delaunay` | `trimesh` | `trisurf`

Introduced before R2006a

TriRep class

(Not recommended) Triangulation representation

Note: `TriRep` is not recommended. Use triangulation instead.

Description

`TriRep` provides topological and geometric queries for triangulations in 2-D and 3-D space. For example, for triangular meshes you can query triangles attached to a vertex, triangles that share an edge, neighbor information, circumcenters, or other features. You can create a `TriRep` directly using existing triangulation data. Alternatively, you can create a Delaunay triangulation, via `DelaunayTri`, which provides access to the `TriRep` functionality.

Construction

.TriRep	(Not recommended) Triangulation representation

Methods

baryToCart	(Not recommended) Convert point coordinates from barycentric to Cartesian
cartToBary	(Not recommended) Convert point coordinates from Cartesian to barycentric
circumcenters	(Not recommended) Circumcenters of specified simplices
edgeAttachments	(Not recommended) Simplices attached to specified edges

edges	(Not recommended) Triangulation edges
faceNormals	(Not recommended) Unit normals to specified triangles
featureEdges	(Not recommended) Sharp edges of surface triangulation
freeBoundary	(Not recommended) Facets referenced by only one simplex
incenters	(Not recommended) Incenters of specified simplices
isEdge	(Not recommended) Test if vertices are joined by edge
neighbors	(Not recommended) Simplex neighbor information
size	(Not recommended) Size of triangulation matrix
vertexAttachments	(Not recommended) Return simplices attached to specified vertices

Properties

X	Coordinates of the points in the triangulation
Triangulation	Triangulation data structure

Copy Semantics

Value. To learn how this affects your use of the class, see Comparing Handle and Value Classes in the MATLAB Object-Oriented Programming documentation.

Indexing

`TriRep` objects support indexing into the triangulation using parentheses (). The syntax is the same as for arrays.

Examples

Load a 2-D triangulation and use the `TriRep` constructor to build an array of the free boundary edges:

```
load trimesh2d
```

This loads triangulation `tri` and vertex coordinates `x`, `y`:

```
trep = TriRep(tri, x,y);
fe = freeBoundary(trep)';
triplot(trep);
```

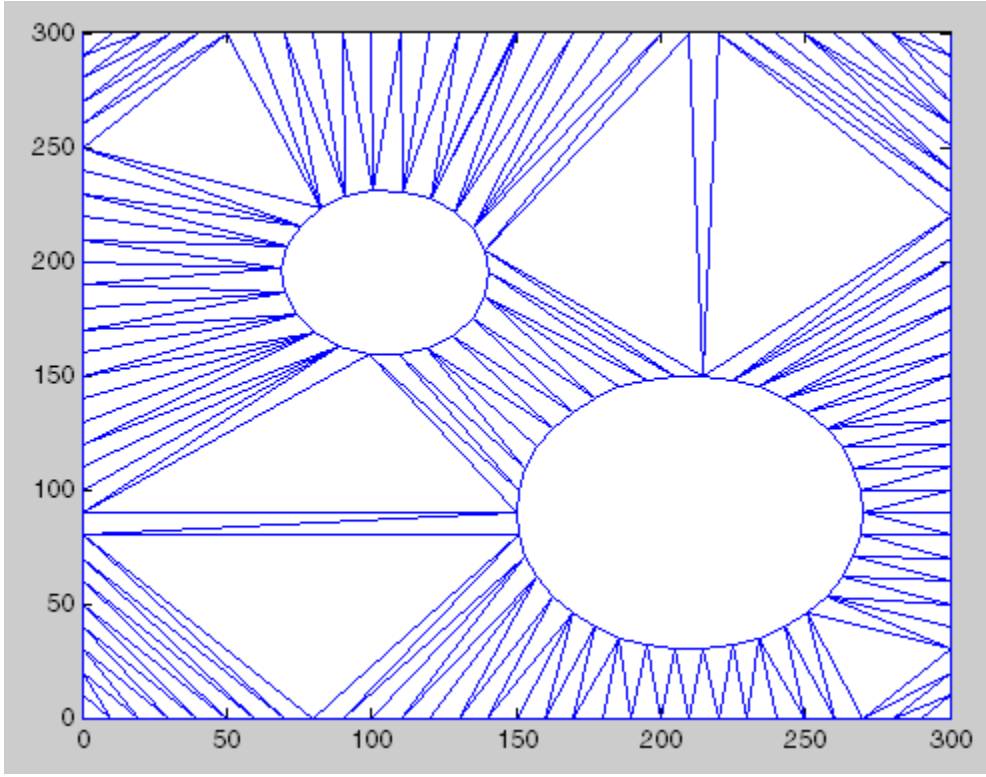

You can add the free edges `fe` to the plot:

```
hold on;
```

```
plot(x(fe), y(fe), 'r','LineWidth',2);
hold off;
axis([-50 350 -50 350]);
axis equal;
```

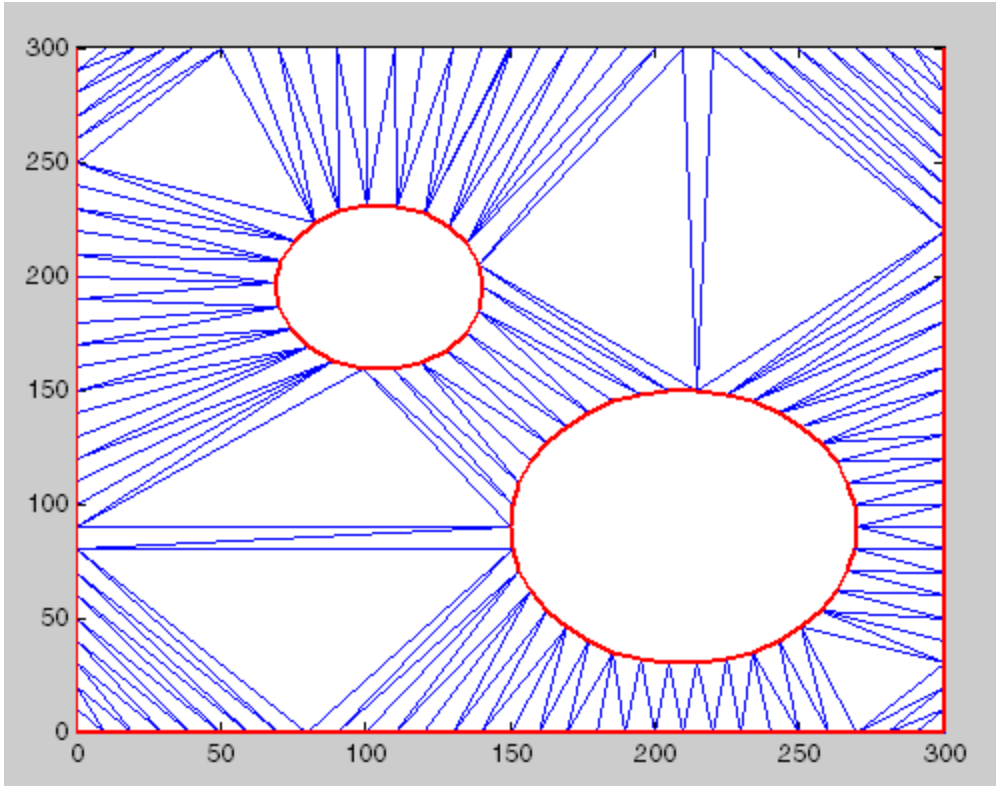

See Also

See Also

delaunayTriangulation | `scatteredInterpolant` | triangulation

TriRep

Class: TriRep

(Not recommended) Triangulation representation

Note: `TriRep` is not recommended. Use triangulation instead.

Syntax

```
TR = TriRep(TRI, X, Y)
TR = TriRep(TRI, X, Y, Z)
TR = TriRep(TRI, X)
```

Description

`TR = TriRep(TRI, X, Y)` creates a 2-D triangulation representation from the triangulation matrix `TRI` and the vertex coordinates `(X, Y)`. `TRI` is an `m`-by-3 matrix that defines the triangulation in face-vertex format, where `m` is the number of triangles. Each row of `TRI` is a triangle defined by indices into the column vector of vertex coordinates `(X, Y)`.

`TR = TriRep(TRI, X, Y, Z)` creates a 3-D triangulation representation from the triangulation matrix `TRI` and the vertex coordinates `(X, Y, Z)`. `TRI` is an `m`-by-3 or `m`-by-4 matrix that defines the triangulation in simplex-vertex format, where `m` is the number of simplices; triangles or tetrahedra in this case. Each row of `TRI` is a simplex defined by indices into the column vector of vertex coordinates `(X, Y, Z)`.

`TR = TriRep(TRI, X)` creates a triangulation representation from the triangulation matrix `TRI` and the vertex coordinates `X`. `TRI` is an `m`-by-`n` matrix that defines the triangulation in simplex-vertex format, where `m` is the number of simplices and `n` is the number of vertices per simplex. Each row of `TRI` is a simplex defined by indices into the array of vertex coordinates `X`. `X` is an `mpts`-by-`ndim` matrix where `mpts` is the number of points and `ndim` is the dimension of the space where the points reside, where $2 \leq$ `ndim` ≤ 3.

Examples

Load a 3-D tetrahedral triangulation compute the free boundary. First, load triangulation `tet` and vertex coordinates `X`.

```
load tetmesh
```

Create the triangulation representation and compute the free boundary.

```
trep = TriRep(tet, X);
[tri, Xb] = freeBoundary(trep);
```

See Also

See Also

delaunayTriangulation | `scatteredInterpolant`

TriScatteredInterp class

(Not recommended) Interpolate scattered data

Note: `TriScatteredInterp` is not recommended. Use `scatteredInterpolant` instead.

Description

`TriScatteredInterp` is used to perform interpolation on a scattered dataset that resides in 2-D or 3-D space. A scattered data set defined by locations `X` and corresponding values `V` can be interpolated using a Delaunay triangulation of `X`. This produces a surface of the form `V = F(X)`. The surface can be evaluated at any query location `QX`, using `QV = F(QX)`, where `QX` lies within the convex hull of `X`. The interpolant `F` always goes through the data points specified by the sample.

Construction

.TriScatteredInterp	(Not recommended) Interpolate scattered data

Properties

`X`	Defines locations of scattered data points in 2-D or 3-D space.	
`V`	Defines value associated with each data point.	
`Method`	Defines method used to interpolate the data .	
	`natural`	Natural neighbor interpolation

	`linear`	Linear interpolation (default)
	`nearest`	Nearest neighbor interpolation

Copy Semantics

Value. To learn how this affects your use of the class, see Comparing Handle and Value Classes in the MATLAB Object-Oriented Programming documentation.

Examples

Create a data set:

```
x = rand(100,1)*4-2;
y = rand(100,1)*4-2;
z = x.*exp(-x.^2-y.^2);
```

Construct the interpolant:

```
F = TriScatteredInterp(x,y,z);
```

Evaluate the interpolant at the locations `(qx, qy)`. The corresponding value at these locations is `qz`:

```
ti = -2:.25:2;
[qx,qy] = meshgrid(ti,ti);
qz = F(qx,qy);
mesh(qx,qy,qz);
hold on;
plot3(x,y,z,'o');
```

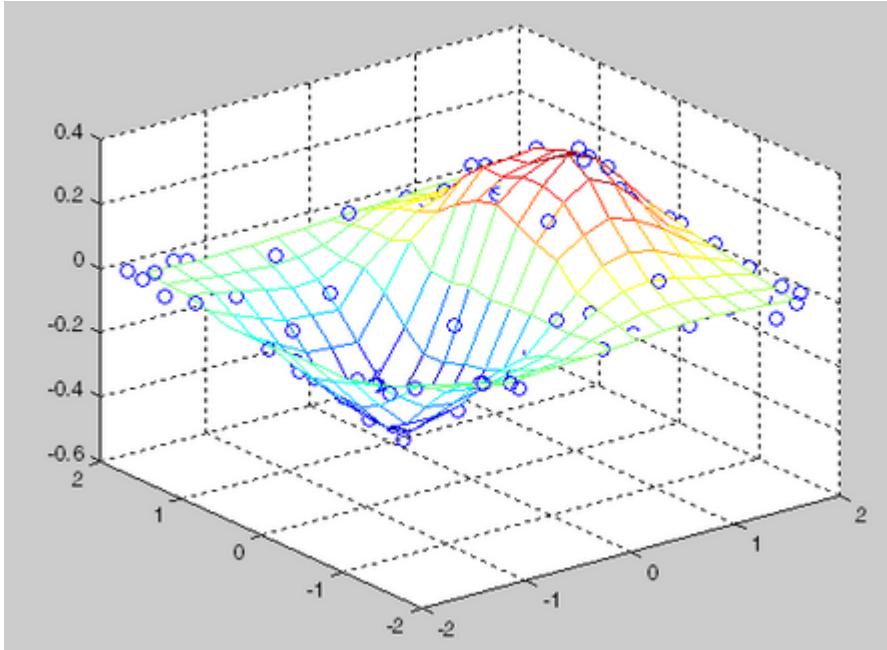

Definitions

Delaunay Triangulation

The *Delaunay triangulation* of a set of points is a triangulation such that the unique circle circumscribed about each triangle contains no other points in the set. The *convex hull* of a set of points is the smallest convex set containing all points of the original set. These definitions extend naturally to higher dimensions.

See Also

See Also

`interp1` | `interp2` | `interp3` | `meshgrid` | `scatteredInterpolant` | triangulation

TriScatteredInterp

Class: TriScatteredInterp

(Not recommended) Interpolate scattered data

Note: `TriScatteredInterp` is not recommended. Use `scatteredInterpolant` instead.

Syntax

```
F = TriScatteredInterp()
F = TriScatteredInterp(X, V)
F = TriScatteredInterp(X, Y, V)
F = TriScatteredInterp(X, Y, Z, V)
F = TriScatteredInterp(DT, V)
F = TriScatteredInterp(..., method)
```

Description

`F = TriScatteredInterp()` creates an empty scattered data interpolant. This can subsequently be initialized with sample data points and values (`Xdata`, `Vdata`) via `F.X = Xdata` and `F.V = Vdata`.

`F = TriScatteredInterp(X, V)` creates an interpolant that fits a surface of the form `V = F(X)` to the scattered data in (`X`, `V`). `X` is a matrix of size `mpts`-by-`ndim`, where `mpts` is the number of points and `ndim` is the dimension of the space where the points reside (`ndim` is 2 or 3). The column vector `V` defines the values at `X`, where the length of `V` equals `mpts`.

`F = TriScatteredInterp(X, Y, V)` and `F = TriScatteredInterp(X, Y, Z, V)` allow the data point locations to be specified in alternative column vector format when working in 2-D and 3-D.

`F = TriScatteredInterp(DT, V)` uses the specified `DelaunayTri` object `DT` as a basis for computing the interpolant. `DT` is a Delaunay triangulation of the scattered data locations, `DT.X`. The matrix `DT.X` is of size `mpts`-by-`ndim`, where `mpts` is the number of points and `ndim` is the dimension of the space where the points reside, `2 <= ndim <= 3`. `V` is a column vector that defines the values at `DT.X`, where the length of `V` equals `mpts`.

`F = TriScatteredInterp(..., method)` allows selection of the technique `method` used to interpolate the data.

Input Arguments

`X`	Matrix of size `mpts`-by-`ndim`, where `mpts` is the number of points and `ndim` is the dimension of the space where the points reside. Input may also be specified as column vectors (`X`, `Y`) or (`X`, `Y`, `Z`)	
`V`	Column vector that defines the values at `X`, where the length of `V` equals `mpts`.	
`DT`	Delaunay triangulation of the scattered data locations	
`method`	`natural`	Natural neighbor interpolation
	`linear`	Linear interpolation (default)
	`nearest`	Nearest-neighbor interpolation

Output Arguments

`F`	Creates an interpolant that fits a surface of the form `V = F(X)` to the scattered data.

Evaluation

To evaluate the interpolant, express the statement in Monge's form `Vq = F(Xq)`, `Vq = F(Xq,Yq)`, or `Vq = F(Xq,Yq,Zq)` where `Vq` is the value of the interpolant at the query location and `Xq`, `Yq`, and `Zq` are the vectors of point locations.

Examples

Create a data set:

```
x = rand(100,1)*4-2;
y = rand(100,1)*4-2;
z = x.*exp(-x.^2-y.^2);
```

Construct the interpolant:

```
F = TriScatteredInterp(x,y,z);
```

Evaluate the interpolant at the locations `(qx, qy)`. The corresponding value at these locations is `qz` .

```
ti = -2:.25:2;
[qx,qy] = meshgrid(ti,ti);
qz = F(qx,qy);
mesh(qx,qy,qz);
hold on;
plot3(x,y,z,'o');
```

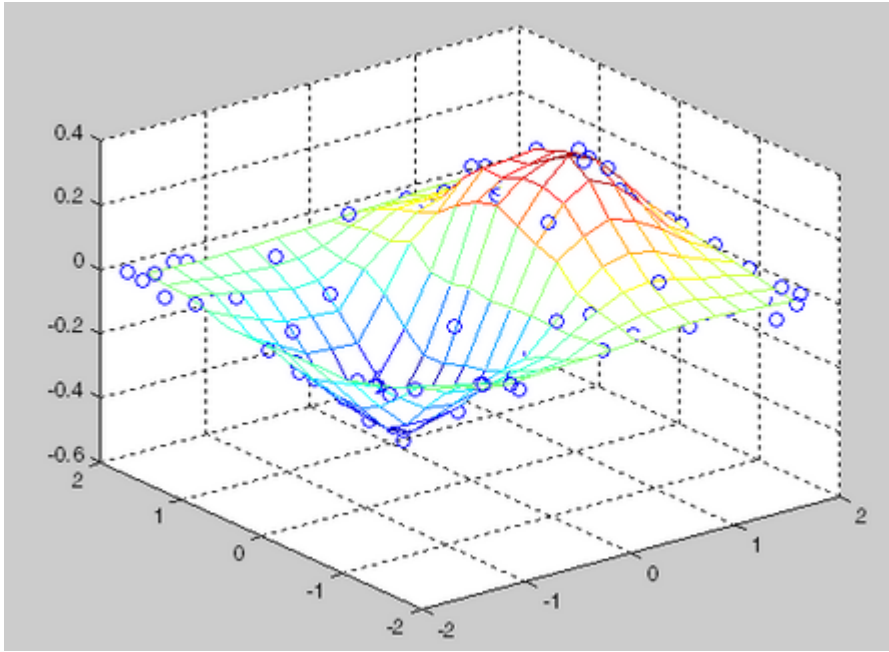

Definitions

Delaunay Triangulation

The *Delaunay triangulation* of a set of points is a triangulation such that the unique circle circumscribed about each triangle contains no other points in the set.

See Also

delaunayTriangulation | `interp1` | `interp2` | `interp3` | `meshgrid`

trisurf

Triangular surface plot

Syntax

```
trisurf(Tri,X,Y,Z,C)
trisurf(Tri,X,Y,Z)
trisurf(TR)
trisurf(...'PropertyName',PropertyValue...)
h = trisurf(...)
```

Description

`trisurf(Tri,X,Y,Z,C)` displays triangles defined in the *m*-by-3 face matrix `Tri` as a surface. Each row of `Tri` defines a single triangular face by indexing into the vectors or matrices that contain the `X`, `Y`, and `Z` vertices. The color is defined by the vector `C`.

`trisurf(Tri,X,Y,Z)` uses `C=Z` so color is proportional to surface height.

`trisurf(TR)` displays the triangles in a triangulation representation. It uses `C = TR.Points(:,3)` to make sure the surface color is proportional to height.

`trisurf(...'PropertyName',PropertyValue...)` specifies additional patch property names and values for the patch graphics object created by the function.

`h = trisurf(...)` returns a patch handle.

Examples

Create Triangular Surface Plot

Create vertex vectors and a face matrix, then create a triangular surface plot.

```
[x,y] = meshgrid(1:15,1:15);
```

```
tri = delaunay(x,y);
z = peaks(15);
trisurf(tri,x,y,z)
```

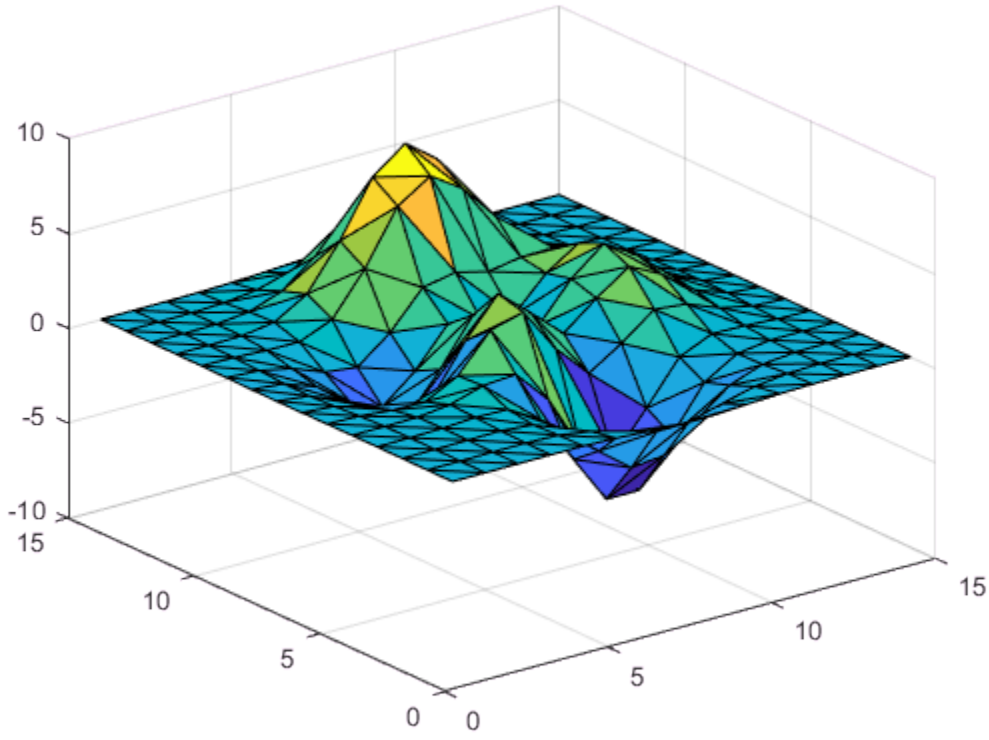

If the surface is in the form of a triangulation representation, you can pass it to `trisurf` alone:

```
tr = triangulation(tri,x(:),y(:),z(:));
trisurf(tr)
```

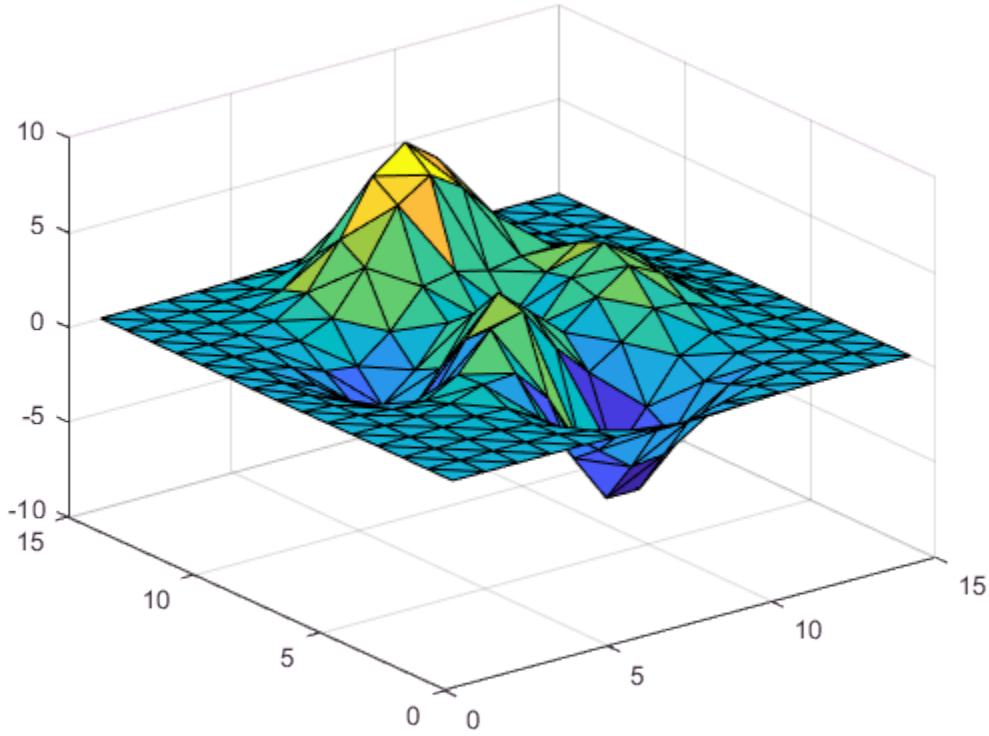

See Also

`patch` | `surf` | `tetramesh` | triangulation | delaunayTriangulation | `trimesh` | `triplot` | `delaunay`

Introduced before R2006a

triu

Upper triangular part of matrix

Syntax

```
U = triu(X)
U = triu(X,k)
```

Description

`U = triu(X)` returns the upper triangular part of `X`.

`U = triu(X,k)` returns the element on and above the kth diagonal of `X`. `k = 0` is the main diagonal, `k > 0` is above the main diagonal, and `k < 0` is below the main diagonal.

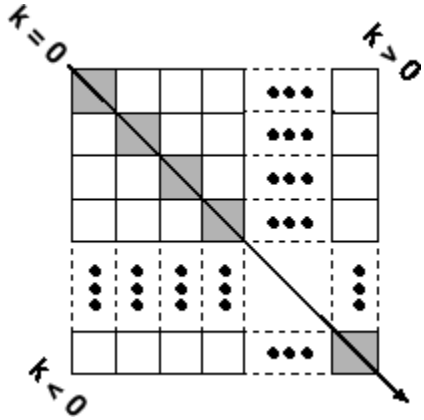

Examples

```
triu(ones(4,4),-1)

ans =
```

```
     1     1     1     1
     1     1     1     1
     0     1     1     1
     0     0     1     1
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If you supply the argument that represents the order of the diagonal matrix, then it must be a real and scalar integer value.

See Also

`diag` | `tril`

Introduced before R2006a

true

Logical 1 (true)

Syntax

```
true
T = true(n)
T = true(sz)
T = true(sz1,...,szN)
T = true( ___ ,'like',p)
```

Description

`true` is shorthand for the logical value `1`.

`T = true(n)` is an `n`-by-`n` matrix of logical ones.

`T = true(sz)` is an array of logical ones where the size vector, `sz`, defines `size(T)`. For example, `true([2 3])` returns a 2-by-3 array of logical ones.

`T = true(sz1,...,szN)` is a `sz1`-by-`...`-by-`szN` array of logical ones where `sz1,...,szN` indicates the size of each dimension. For example, `true(2,3)` returns a 2-by-3 array of logical ones.

`T = true( ___ ,'like',p)` returns an array of logical ones of the same sparsity as the logical variable `p` using any of the previous size syntaxes.

Examples

Generate Square Matrix of Logical Ones

Use `true` to generate a 3-by-3 square matrix of logical ones.

```
A = true(3)
```

```
A = 3×3 logical array
```

```
   1   1   1
   1   1   1
   1   1   1
```

```
class(A)
```

```
ans =
'logical'
```

The result is of class `logical`.

Generate Array of Logical Ones with Arbitrary Dimensions

Use `true` to generate a 3-by-2-by-2 matrix of logical ones.

```
true(3,2,2)
```

```
ans = 3×2×2 logical array

(:,:,1) =

   1   1
   1   1
   1   1


(:,:,2) =

   1   1
   1   1
   1   1
```

Alternatively, you can use a size vector to specify the size of the matrix.

```
true([3,2,2])
```

```
ans = 3×2×2 logical array

(:,:,1) =

   1   1
   1   1
   1   1
```

```
(:,:,2) =

   1   1
   1   1
   1   1
```

Note that specifying multiple vector inputs returns an error.

Execute Logic Statement

`true` along with `false` can be used to execute logic statements.

Test the logical statement

`~(A and B) = (~A) or (~B)`

for `A = true` and `B = false`.

```
~(true & false) == (~true) | (~false)
```

```
ans = logical
   1
```

The result is logical 1 (true), since the logical statements on both sides of the equation are equivalent. This logical statement is an instance of De Morgan's Law.

Generate Logical Array of Selected Sparsity

Generate a logical array of the same sparsity as the selected array.

```
A = logical(sparse(5,3));
whos A
```

```
  Name      Size            Bytes  Class      Attributes

  A         5x3                41  logical    sparse
```

```
T = true(4,'like',A);
whos T
```

```
  Name      Size            Bytes  Class     Attributes

  T         4x4               184  logical   sparse
```

The output array `T` has the same `sparse` attribute and data-type as the specified array `A`.

Input Arguments

n — Size of square matrix

integer

Size of square matrix, specified as an integer. `n` sets the output array size to `n`-by-`n`. For example, `true(3)` returns a 3-by-3 array of logical ones.

- If `n` is `0`, then `T` is an empty matrix.
- If `n` is negative, then it is treated as `0`.

Data Types: `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

sz — Size vector

row vector of integers

Size vector, specified as a row vector of integers. For example, `true([2 3])` returns a 2-by-3 array of logical ones.

- If the size of any dimension is `0`, then `T` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- If any trailing dimensions greater than `2` have a size of `1`, then the output, `T`, does not include those dimensions.

Data Types: `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

sz1,...,szN — Size inputs

comma-separated list of integers

Size inputs, specified by a comma-separated list of integers. For example, `true(2,3)` returns a 2-by-3 array of logical ones.

- If the size of any dimension is `0`, then `T` is an empty array.

- If the size of any dimension is negative, then it is treated as 0.
- If any trailing dimensions greater than 2 have a size of 1, then the output, T, does not include those dimensions.

Data Types: `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

p — Prototype
logical variable

Prototype, specified as a logical variable.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`
Complex Number Support: Yes

Output Arguments

T — Output of logical ones
scalar | vector | matrix | N-D array

Output of logical ones, returned as a scalar, vector, matrix, or N-D array.

Data Types: `logical`

Tips

- `true(n)` is much faster and more memory efficient than `logical(true(n))`.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Dimensions must be real, nonnegative, integers.

See Also

See Also

`false` | `logical`

Topics

"Class Support for Array-Creation Functions"

Introduced before R2006a

try, catch

Execute statements and catch resulting errors

Syntax

```
try
   statements
catch exception
   statements
end
```

Description

`try` *`statements`*`, catch` *`statements`* `end` executes the statements in the `try` block and catches resulting errors in the `catch` block. This approach allows you to override the default error behavior for a set of program statements. If any statement in a `try` block generates an error, program control goes immediately to the `catch` block, which contains your error handling statements.

`exception` is an `MException` object that allows you to identify the error. The `catch` block assigns the current exception object to the variable in *`exception`*.

Both `try` and `catch` blocks can contain nested `try/catch` statements.

Examples

Supplement Error Message

Create two matrices that you cannot concatenate vertically.

```
A = rand(3);
B = ones(5);

C = [A; B];
```

```
Error using vertcat
Dimensions of matrices being concatenated are not consistent.
```

Use `try/catch` to display more information about the dimensions.

```
try
   C = [A; B];
catch ME
   if (strcmp(ME.identifier,'MATLAB:catenate:dimensionMismatch'))
      msg = ['Dimension mismatch occurred: First argument has ', ...
            num2str(size(A,2)),' columns while second has ', ...
            num2str(size(B,2)),' columns.'];
        causeException = MException('MATLAB:myCode:dimensions',msg);
        ME = addCause(ME,causeException);
   end
   rethrow(ME)
end
```

```
Error using vertcat
Dimensions of matrices being concatenated are not consistent.

Caused by:
    Dimension mismatch occurred: First argument has 3 columns while second has 5 colum
```

If matrix dimensions do not agree, MATLAB displays more information about the mismatch. Any other errors appear as usual.

Repackage Error as Warning

Catch any exception generated by calling the nonexistent function, `notaFunction`. If there is an exception, issue a warning and assign the output a value of 0.

```
try
    a = notaFunction(5,6);
catch
    warning('Problem using function.  Assigning a value of 0.');
    a = 0;
end
```

```
Warning: Problem using function.  Assigning a value of 0.
```

By itself, the call to `notaFunction` results in an error. If you use `try` and `catch`, this code catches any exception and repackages it as a warning, allowing MATLAB to continue executing subsequent commands.

Handle Different Types of Errors

Use `try/catch` to handle different types of errors in different ways.

- If the function `notaFunction` is undefined, issue a warning instead of an error and assign the output a value of `NaN`.
- If `notaFunction.m` exists, but is a script instead of a function, issue a warning instead of an error, run the script, and assign the output a value of `0`.
- If MATLAB throws an error for any other reason, rethrow the exception.

```
try
    a = notaFunction(5,6);
catch ME
    switch ME.identifier
        case 'MATLAB:UndefinedFunction'
            warning('Function is undefined.  Assigning a value of NaN.');
            a = NaN;
        case 'MATLAB:scriptNotAFunction'
            warning(['Attempting to execute script as function. '...
                'Running script and assigning output a value of 0.']);
            notaFunction;
            a = 0;
        otherwise
            rethrow(ME)
    end
end
```

```
Warning: Function is undefined.  Assigning a value of NaN.
```

Tips

- You cannot use multiple `catch` blocks within a `try` block, but you can nest complete `try/catch` blocks.
- Unlike some other languages, MATLAB does not allow the use of a `finally` block within `try/catch` statements.

See Also

See Also

MException | `assert` | `error`

Introduced before R2006a

tscollection

Create `tscollection` object

Syntax

```
tsc = tscollection(TimeSeries)
tsc = tscollection(Time)
tsc = tscollection(...,'Parameter',Value,...)
```

Description

`tsc = tscollection(TimeSeries)` creates a `tscollection` object `tsc` with one or more `timeseries` objects already in the MATLAB workspace. The argument `TimeSeries` can be a

- Single `timeseries` object
- Cell array of `timeseries` objects

`tsc = tscollection(Time)` creates an empty `tscollection` object with the time vector `Time`. When time values are date strings, you must specify `Time` as a cell array of date strings.

`tsc = tscollection(...,'Parameter',Value,...)` creates a `tscollection` object with optional parameter-value pairs you enter after specifying either a time vector or a `timeseries` object. You can specify the following parameter:

- `Name` — String that specifies the name of this `tscollection` object

Examples

The following example shows how to create a `tscollection` object.

1. Import the sample data.

   ```
   load count.dat
   ```

2. Create three `timeseries` objects to store each set of data:

```
count1 = timeseries(count(:,1),1:24,'name', 'ts1');
count2 = timeseries(count(:,2),1:24,'name', 'ts2');
count3 = timeseries(count(:,3),1:24,'name', 'ts3');
```

3 Create a `tscollection` object named `tsc` and add to it two out of three time series already in the MATLAB workspace, by using the following syntax:

```
tsc = tscollection({count1 count2},'name','tsc')
```

Tips

Definition: Time Series Collection

A time series collection object is a MATLAB variable that groups several time series with a common time vector. The time series that you include in the collection are called members of this collection.

Properties of Time Series Collection Objects

This table lists the properties of the `tscollection` object. You can specify the `Time`, `TimeSeries`, and `Name` properties as input arguments in the constructor.

Property	Description
`Name`	`tscollection` name as a string. This can differ from the `tscollection` name in the MATLAB workspace.
`Time`	When `TimeInfo.StartDate` is empty, values are measured relative to `0` . When `TimeInfo.StartDate` is defined, values represent date strings measured relative to the `StartDate`. The length of `Time` must be the same as the first or the last dimension of `Data` for each collection .
`TimeInfo`	Contains fields for contextual information about `Time`: • `Units` — Time units with any of the following values: `'weeks'`, `'days'`, `'hours'`, `'minutes'`, `'seconds'`, `'milliseconds'`, `'microseconds'`, `'nanoseconds'` • `Start` — Start time

Property	Description
	• `End` — End time (read only) • `Increment` — Interval between subsequent time values. `NaN` when times are not uniformly sampled. • `Length` — Length of the time vector (read only) • `Format` — String defining the date string display format. See `datestr`. • `StartDate` — Date string defining the reference date. See `setabstime (tscollection)`. • `UserData` — Any additional user-defined information

See Also

`addts` | `datestr` | `setabstime (tscollection)` | timeseries

Introduced before R2006a

tsdata.event

Construct event object for `timeseries` object

Syntax

```
e = tsdata.event(Name,Time)
e = tsdata.event(Name,Time,'Datenum')
```

Description

`e = tsdata.event(Name,Time)` creates an event object with the specified Name that occurs at the time Time. Time can either be a real value or a date string.

`e = tsdata.event(Name,Time,'Datenum')` uses `'Datenum'` to indicate that the `Time` value is a serial date number generated by the `datenum` function. The `Time` value is converted to a date string after the event is created.

Tips

You add events by using the `addevent` method.

Fields of the `tsdata.event` object include the following:

- `EventData` — MATLAB array that stores any user-defined information about the event
- `Name` — String that specifies the name of the event
- `Time` — Time value when this event occurs, specified as a real number
- `Units` — Time units
- `StartDate` — A reference date, specified in MATLAB `datestr` format. `StartDate` is empty when you have a numerical (non-date-string) time vector.

Introduced before R2006a

tsearchn

N-D closest simplex search

Syntax

```
t = tsearchn(X,TRI,XI)
[t,P] = tsearchn(X,TRI,XI)
```

Description

`t = tsearchn(X,TRI,XI)` returns the indices `t` of the enclosing simplex of the Delaunay triangulation `TRI` for each point in `XI`. `X` is an `m`-by-`n` matrix, representing `m` points in N-dimensional space. `XI` is a `p`-by-`n` matrix, representing `p` points in N-dimensional space. `tsearchn` returns `NaN` for all points outside the convex hull of `X`. If a point in `XI` lies on the boundary of two or more simplexes, then the largest index is returned. `tsearchn` requires a triangulation `TRI` of the points `X` obtained from `delaunayn`.

`[t,P] = tsearchn(X,TRI,XI)` also returns the barycentric coordinate `P` of `XI` in the simplex `TRI`. `P` is a `p`-by-`n+1` matrix. Each row of `P` is the barycentric coordinate of the corresponding point in `XI`. It is useful for interpolation.

Tips

- The `pointLocation` function can provide better search performance for some 2-D and 3-D triangulations, such as finite element meshes.

See Also

delaunayTriangulation

Introduced before R2006a

type

Display contents of file

Syntax

```
type filename
```

Description

`type filename` displays the contents of the specified file in the MATLAB Command Window.

Examples

Display the Contents of a File

Display the contents of the file `diceRoll`. Since `diceRoll` does not exist, but `diceRoll.m` exists, MATLAB displays the contents of `diceRoll.m`.

```
type diceRoll
```

```
function [d1,d2] = diceRoll
str = '@()randi([1 6],1)';
d1 = str2func(str);
d2 = eval(str);
end

function r = randi(~,~)
r = 1;
end
```

Input Arguments

`filename` — Name of file to display
character vector | string

Name of the file to display, specified as a character vector or a string. `filename` can be an absolute or relative path, and can include a path and a file extension. `type` supports file names with these extensions:

File Extension	Description
`.mlx`	MATLAB Live Script — An interactive document created using MATLAB Live Editor
`.mlapp`	MATLAB App File — An app created using MATLAB App Designer
`.m`	MATLAB Code — A MATLAB script, function, or class

If you do not specify a file extension and a file without an extension does not exist, then `type` assumes that the extension is `.mlx`, `.mlapp`, or `.m`. For example, if a file `myscript.m` exists, then the command `type myscript` displays the contents of the file.

See Also

See Also

`dbtype` | `more` | `which`

Introduced in R2006a

typecast

Convert data types without changing underlying data

Syntax

```
Y = typecast(X, type)
```

Description

`Y = typecast(X, type)` converts a numeric value in `X` to the data type specified by `type`. Input `X` must be a full, noncomplex, numeric scalar or vector. The `type` input is a string set to one of the following: `'uint8'`, `'int8'`, `'uint16'`, `'int16'`, `'uint32'`, `'int32'`, `'uint64'`, `'int64'`, `'single'`, or `'double'`.

`typecast` is different from the MATLAB `cast` function in that it does not alter the input data. `typecast` always returns the same number of bytes in the output `Y` as were in the input `X`. For example, casting the 16-bit integer 1000 to `uint8` with `typecast` returns the full 16 bits in two 8-bit segments (3 and 232) thus keeping its original value (3*256 + 232 = 1000). The `cast` function, on the other hand, truncates the input value to 255.

The output of `typecast` can be formatted differently depending on what system you use it on. Some computer systems store data starting with its most significant byte (an ordering called *big-endian*), while others start with the least significant byte (called *little-endian*).

Note MATLAB issues an error if `X` contains fewer values than are needed to make an output value.

Examples

Example 1

This example converts between data types of the same size:

```
typecast(uint8(255), 'int8')
ans =
   -1

typecast(int16(-1), 'uint16')
ans =
  65535
```

Example 2

Set X to a 1-by-3 vector of 32-bit integers, then cast it to an 8-bit integer type:

```
X = uint32([1 255 256])
X =
           1          255          256
```

Running this on a little-endian system produces the following results. Each 32-bit value is divided up into four 8-bit segments:

```
Y = typecast(X, 'uint8')
Y =
   1   0   0   0  255   0   0   0   0   1   0   0
```

The third element of `X`, 256, exceeds the 8 bits that it is being converted to in `Y`(9) and thus overflows to `Y`(10):

```
Y(9:12)
ans =
    0    1    0    0
```

Note that `length(Y)` is equal to `4.*length(X)`. Also note the difference between the output of `typecast` versus that of `cast`:

```
Z = cast(X, 'uint8')
Z =
    1  255  255
```

Example 3

This example casts a smaller data type (`uint8`) into a larger one (`uint16`). Displaying the numbers in hexadecimal format makes it easier to see just how the data is being rearranged:

```
format hex
X = uint8([44 55 66 77])
X =
   2c   37   42   4d
```

The first `typecast` is done on a big-endian system. The four 8-bit segments of the input data are combined to produce two 16-bit segments:

```
Y = typecast(X, 'uint16')
Y =
   2c37   424d
```

The second is done on a little-endian system. Note the difference in byte ordering:

```
Y = typecast(X, 'uint16')
Y =
   372c   4d42
```

You can format the little-endian output into big-endian (and vice versa) using the `swapbytes` function:

```
Y = swapbytes(typecast(X, 'uint16'))
Y =
   2c37   424d
```

Example 4

This example attempts to make a 32-bit value from a vector of three 8-bit values. MATLAB issues an error because there are an insufficient number of bytes in the input:

```
format hex
typecast(uint8([120 86 52]), 'uint32')

Error using typecast
Too few input values to make output type.
```

Repeat the example, but with a vector of four 8-bit values, and it returns the expected answer:

```
typecast(uint8([120 86 52 18]), 'uint32')
ans =
   12345678
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Value of data type argument must be lowercase.
- When you use `typecast` with inheritance of input port data types in MATLAB Function blocks, you can receive a size error. To avoid this error, specify the block input port data types explicitly.
- Integer input or result classes must map directly to a C type on the target hardware.
- The input must be a variable-length vector or a fixed-size vector. See "Variable-Sizing Restrictions for Code Generation of Toolbox Functions" (MATLAB Coder).
- The output vector always has the same orientation as the input vector.

See Also

`cast` | `class` | `swapbytes`

Introduced before R2006a

tzoffset

Time zone offset from UTC

Syntax

```
dt = tzoffset(t)
[dt,dst] = tzoffset(t)
```

Description

`dt = tzoffset(t)` returns an array of durations equal to the time zone offset from UTC of each datetime value in `t`. That is, `dt` is the amount of time that each datetime in `t` differs from UTC. For datetimes that occur during Daylight Saving Time (DST), `dt` includes the time shift for DST. The offset for unzoned datetime values is not defined.

`[dt,dst] = tzoffset(t)` additionally returns the time shift for Daylight Saving Time for each datetime in `t`.

Examples

Find Time Zone Offset

Create a `datetime` array in the time zone for New York City.

```
t1 = datetime('today','TimeZone','America/New_York');
t = dateshift(t1,'end','month',[1:3:9])
```

```
t = 1×3 datetime array
   31-Mar-2017   30-Jun-2017   30-Sep-2017
```

Find the time zone offset from UTC and the time shift for Daylight Saving Time for each datetime value.

```
[dt,dst] = tzoffset(t)
```

```
dt = 1×3 duration array
```

```
   -4:00   -4:00   -4:00

dst = 1×3 duration array
   01:00   01:00   01:00
```

Input Arguments

`t` — Input date and time
`datetime` array

Input date and time, specified as a `datetime` array.

Output Arguments

`dt` — Time zone offset from UTC
scalar | vector | matrix | multidimensional array

Time zone offset from UTC, returned as a scalar, vector, matrix, or multidimensional `duration` array. `dt` is the same size as `t`.

`dst` — Time shift for Daylight Saving Time
scalar | vector | matrix | multidimensional array

Time shift for Daylight Saving Time, returned as a scalar, vector, matrix, or multidimensional `duration` array. `dt` is the same size as `t`. A value of `01:00` indicates that the corresponding datetime in `t` occurs during Daylight Saving Time in a location that observes it. For locations that do not observe Daylight Saving Time, the elements of the `dst` array are all `00:00`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`isdst`

Introduced in R2014b

uibuttongroup

Create button group to manage radio buttons and toggle buttons

Syntax

```
bg = uibuttongroup
bg = uibuttongroup(Name,Value)
bg = uibuttongroup(parent)
bg = uibuttongroup(parent,Name,Value)
```

Description

`bg = uibuttongroup` creates a button group in an existing "traditional figure" on page 1-11806 and returns the button group object, `bg`. If there is no traditional figure available, then MATLAB creates a new one to serve as the parent.

`bg = uibuttongroup(Name,Value)` specifies button group property values using one or more `Name,Value` pair arguments.

`bg = uibuttongroup(parent)` creates a button group and designates a specific parent. The `parent` argument can be a traditional figure, a "UI figure" on page 1-11806, panel, tab, or another button group.

`bg = uibuttongroup(parent,Name,Value)` specifies button group property values using one or more `Name,Value` pair arguments.

Examples

Code Response to Radio Button Selection in Traditional Figure

Show the previous and current button selections in the MATLAB Command Window when the app user selects a new radio button in a button group.

Copy and paste this code into the Editor and run it to see how it works.

```
function myui
bg = uibuttongroup('Visible','off',...
                   'Position',[0 0 .2 1],...
                   'SelectionChangedFcn',@bselection);

% Create three radio buttons in the button group.
r1 = uicontrol(bg,'Style',...
                   'radiobutton',...
                   'String','Option 1',...
                   'Position',[10 350 100 30],...
                   'HandleVisibility','off');

r2 = uicontrol(bg,'Style','radiobutton',...
                   'String','Option 2',...
                   'Position',[10 250 100 30],...
                   'HandleVisibility','off');

r3 = uicontrol(bg,'Style','radiobutton',...
                   'String','Option 3',...
                   'Position',[10 150 100 30],...
                   'HandleVisibility','off');

% Make the uibuttongroup visible after creating child objects.
bg.Visible = 'on';

    function bselection(source,event)
       display(['Previous: ' event.OldValue.String]);
       display(['Current: ' event.NewValue.String]);
       display('------------------');
    end
end
```

The `bselection` function displays the `OldValue` and `NewValue` properties of `event`.

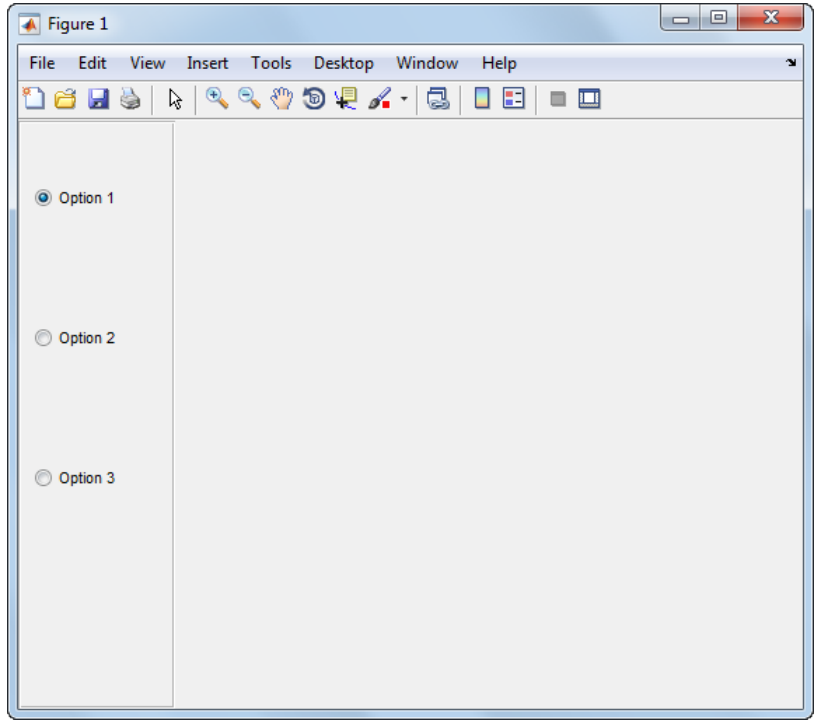

Create Radio Button Group Within Panel of UI Figure

After you create a button group, use dot notation to set and get button group properties.

Create radio buttons group in a panel within a UI figure window.

```
fig = uifigure;
panel = uipanel(fig);
bg = uibuttongroup(panel,...
                   'Title','Language Options',...
                   'Position', [50 50 123 106]);


% Create three radio buttons in the button group.
r1 = uiradiobutton(bg,...
                   'Text','English',...
                   'Position',[10 60 70 15]);
```

```
r2 = uiradiobutton(bg,...
                   'Text','French',...
                   'Position',[10 38 70 15]);

r3 = uiradiobutton(bg,...
                   'Text','German',...
                   'Position',[10 15 70 15]);
```

Get the current button group selection

```
bg.SelectedObject.Text
```

```
ans =

English
```

Change the button group position within the panel

```
bg.Position = [10 10 123 106];
```

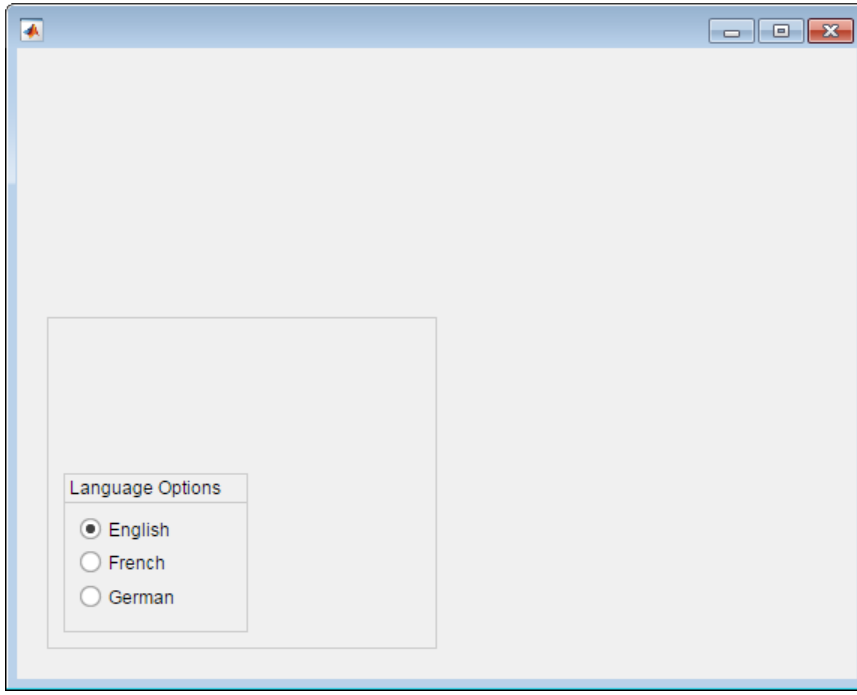

Code Response to Radio Button Selection in UI Figure

Show the previous and current button selections in the MATLAB Command Window when the app user selects a new radio button in a button group.

Copy and paste this code into the Editor and run it to see how it works.

```
function myfunc
fig = uifigure;
bg = uibuttongroup(fig,...
                   'Title','Options',...
                   'Position', [100 100 123 106],...
                   'SelectionChangedFcn',@(bg,event) bselection(bg,event));


% Create three radio buttons in the button group.
r1 = uiradiobutton(bg,...
                   'Text','Option 1',...
                   'Position',[10 60 70 15]);

r2 = uiradiobutton(bg,...
                   'Text','Option 2',...
```

```
                  'Position',[10 38 70 15]);

r3 = uiradiobutton(bg,...
                  'Text','Option 3',...
                  'Position',[10 15 70 15]);

    function bselection(bg,event)
       display(['Previous: ', event.OldValue.Text]);
       display(['Current: ', event.NewValue.Text]);
       display('------------------');
    end
end
```

The `bselection` function displays the `Previous` and `Current` properties of the `event` object.

Input Arguments

`parent` — Parent object of button group

figure object (default) | panel object | tab object | button group object

Parent object of the button group, specified as a figure, UI figure, panel, tab, or button group object. If you do not specify a parent, the default parent is a traditional figure object.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Title','Options'` specifies that the button group title is `Options`.

- For Name-Value pair arguments you can use with button groups in traditional figure windows, see Uibuttongroup Properties.
- For Name-Value pair arguments you can use with button groups in UI figure windows, see ButtonGroup Properties.

Definitions

traditional figure

A traditional figure is one that MATLAB creates when you use GUIDE or the `figure` function. For more information on the difference between traditional figures and UI figures, see "Graphics Support in App Designer".

UI figure

A UI figure is one that MATLAB creates when you use App Designer or the `uifigure` function. For more information on the difference between traditional figures and UI figures, see "Graphics Support in App Designer".

Tips

- A button group can contain any UI component type (except an ActiveX control), but it only manages the selection of radio buttons and toggle buttons.
- To make your program respond when the app user selects a radio button or toggle button that is inside a button group. define a `SelectionChangedFcn` callback function for the button group. You cannot define callbacks for the individual buttons.
- To determine which radio button or toggle button is selected, query the `SelectedObject` property of the button group. You can execute this query anywhere in your code.
- If you set the `Visible` property of a button group object to `'off'`, then any child objects it contains (buttons, other button groups, etc.) become invisible along with the parent button group. However, the `Visible` *property value* of each child object remains unaffected.

See Also

See Also

Functions

`figure` | `uicontrol` | `uifigure` | `uiradiobutton` | `uitogglebutton`

Properties
ButtonGroup Properties | Uibuttongroup Properties

Introduced before R2006a

Uibuttongroup Properties

Control appearance and behavior of button group

Description

Uibuttongroups are containers for grouping together and managing the exclusive selection of radio buttons and toggle buttons. The `uibuttongroup` function creates a button group and sets any required properties. By changing uibuttongroup property values, you can modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
b = uibuttongroup;
bgcolor = b.BackgroundColor;
b.BackgroundColor = [.5 .5 .5];
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Visible` — Uibuttongroup visibility

`'on'` (default) | `'off'`

Uibuttongroup visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the uibuttongroup displays on the screen. If the `Visible` property of a uibuttongroup is set to `'off'`, the entire uibuttongroup is invisible, but you can still specify and access its properties.

Changing the size of an invisible uibuttongroup triggers the `SizeChangedFcn` callback when the uibuttongroup becomes visible.

Note Changing the `Visible` property of a uibuttongroup does *not* change the `Visible` property of its child components even though hiding the uibuttongroup prevents its children from displaying.

`BackgroundColor` — Uibuttongroup background color

`[.94 .94 .94]` (default) | RGB triplet | short name | long name

Uibuttongroup background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the uibuttongroup.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Data Types: `double` | `char`

`ForegroundColor` — Uibuttongroup title color

`[0 0 0]` (default) | RGB triplet | short name | long name

Uibuttongroup title color, specified as an RGB triplet, short name, or long name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`

Long Name	Short Name	RGB Triplet
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0 0 1]

Example: 'b'

Example: 'blue'

BorderType — Border of the uibuttongroup

'etchedin' (default) | 'etchedout' | 'beveledin' | 'beveledout' | 'line' | 'none'

Border of the uibuttongroup area, specified as 'etchedin', 'none', 'etchedout', 'beveledin', 'beveledout', or 'line'.

- For a 3-D look, use etched or beveled borders.

  Use the HighlightColor and ShadowColor properties to specify the color of 3-D borders.
- For a 2-D look, use a line border.

  Use the HighlightColor property to specify the line border color.

BorderWidth — Width of uibuttongroup border

1 (default) | positive integer value

Width of the uibuttongroup border, specified as a positive integer value. The unit of measurement is pixels. Etched and beveled borders wider than three pixels might not appear correctly at the corners.

HighlightColor — Uibuttongroup border highlight color

RGB triplet | short name | long name

Uibuttongroup border highlight color, specified as an RGB triplet, short name, or long name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

`ShadowColor` — Uibuttongroup border shadow color

RGB triplet | short name | long name

Uibuttongroup border shadow color, specified as an RGB triplet, short name, or long name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

`Clipping` — Clipping of child components to uibuttongroup

`'on'` (default) | `'off'`

Note: The behavior of the `Clipping` property has changed. It no longer has any effect on uibuttongroups. Child objects are now clipped to the uibuttongroup boundary regardless of the value of this property. This property might be removed in a future release.

Location and Size

`Position` — Location and size of uibuttongroup, including borders and title

`[left bottom width height]`

Location and size of the uibuttongroup, including borders and title, specified as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the uibuttongroup
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the uibuttongroup
`width`	Distance between the right and left outer edges of the uibuttongroup
`height`	Distance between the top and bottom outer edges of the uibuttongroup

All measurements are in units specified by the `Units` property.

Note: The `Position` values are relative to the parent container's *drawable area*. The drawable area is the area inside the borders of the container and does not include the area occupied by the title. If the parent container is a figure, then the drawable area also excludes the menu bar and tool bar.

Example: Modify One Value in the Position Vector

You can combine dot notation and array indexing when you want to change one value in the `Position` vector. For example, this code sets the width of the Uibuttongroup to `0.5`:

```
b = uibuttongroup;
b.Position(3) = 0.5;
b.Position

ans =

      0   0   0.5000  1.0000
```

`OuterPosition` — Location and size of uibuttongroup, including borders and title

`[left bottom width height]`

Location and size of the uibuttongroup, including borders and title, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` property value.

`InnerPosition` — Location and size of uibuttongroup, excluding borders and title

`[left bottom width height]`

This property is read-only.

Location and size of the uibuttongroup, excluding borders and title, returned as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Value	Description
`left`	Distance from the inner left edge of the parent container to the inner left edge of the uibuttongroup.
`bottom`	Distance from the inner bottom edge of the parent container to the inner bottom edge of the uibuttongroup.
`width`	Distance between the inner edges of the uibuttongroup's right and left borders.
`height`	Distance between the inner edges of the uibuttongroup's top and bottom borders. This distance excludes the title, if it exists.

All measurements are in units specified by the `Units` property.

Note: These are some important points to consider when using the `InnerPosition` property:

- `InnerPosition` values are affected by the presence of a title, font characteristics, `BorderType`, and `BorderWidth`.
- `InnerPosition` values are relative to the parent container's *drawable area*. The drawable area is the area inside the borders of the container and exclude the area occupied by the title. If the parent container is a figure, then the drawable area also excludes the menu bar and tool bar.

`Units` — Units of measurement

`'normalized'` (default) | `'pixels'` | `'inches'` | `'centimeters'` | `'points'` | `'characters'`

Units of measurement, specified one of the values from this table.

Units Value	Description
`'normalized'`	These units are normalized with respect to the parent container. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'points'`	Points. One point equals 1/72nd of an inch.

Units Value	Description
`'characters'`	These units are based on the default uicontrol font of the graphics root object: • Character width = width of the letter `x`. • Character height = distance between the baselines of two lines of text. To access the default uicontrol font, use `get(groot,'defaultuicontrolFontName')` or `set(groot,'defaultuicontrolFontName')`.

MATLAB measures all units from the lower left corner of the parent object.

If you change the value of the `Units` property, it is good practice to return it to its default value after completing your computation to avoid affecting other functions that assume the `Units` property is set to the default value.

The order in which you specify the Units and Position properties has these effects:

- If you specify the `Units` property before the `Position` property, then MATLAB sets `Position` using the units you specified.
- If you specify the `Units` property after the `Position` property, MATLAB sets the position using the default `Units`. Then, MATLAB converts the `Position` values to the equivalent values in the units you specified.

`SizeChangedFcn` — Size change callback function

`''` (default) | function handle | cell array | character vector

Size change callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Define this callback to customize the app layout when the size of this container changes (e.g., when the user resizes the window).

The `SizeChangedFcn` callback executes when:

- This container becomes visible for the first time.
- This container is visible while its size changes.
- This container becomes visible for the first time after its size changes. This situation occurs when the size changes while the container is invisible, and then it becomes visible later.

Other important points to consider when defining a `SizeChangedFcn` callback:

- Consider delaying the display of this container until after all the variables that the `SizeChangedFcn` uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the container, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- If your app contains nested containers, they resize from the inside out.
- To access the container that is resizing from within the `SizeChangedFcn`, refer to the source object (the first input argument in the callback) or use the `gcbo` function.

Tip: As an easy alternative to specifying a `SizeChangedFcn` callback, you can set the `Units` property of all the objects you put inside a container to `'normalized'`. Doing so makes those components scale proportionally with the container.

See "Lay Out a UI Programmatically" for more information about managing layouts with `SizeChangedFcn` callbacks.

`ResizeFcn` — Uibuttongroup resize callback function

`''` (default) | function handle | cell array | character vector

Callback function that executes when the uibuttongroup size changes, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Note: Use of the `ResizeFcn` property is not recommended. It might be removed in a future release. Use `SizeChangedFcn` instead.

Data Types: `function_handle` | `cell` | `char`

Font Style

`FontName` — Font for displaying uibuttongroup title

system supported font name | `'FixedWidth'`

Font for displaying the uibuttongroup title, specified as a system supported font name or `'FixedWidth'`. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, specify 'FixedWidth'. The actual fixed-width font used depends on the FixedWidthFontName property of the root object. Changing the `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Arial'`

`FontSize` — Font size for uibuttongroup title

positive number

Font size for the uibuttongroup title, specified as a positive number. The `FontUnits` property specifies the units. The default size is system-dependent.

Example: `12`

Example: `12.5`

Data Types: `double`

`FontUnits` — Units of font size for uibuttongroup title

`'points'` (default) | `'normalized'` | `'inches'` | `'centimeters'` | `'pixels'`

Units of font size for the uibuttongroup title, specified as one of the values from this table.

Units Value	Description
`'points'`	Points. One point is 1/72nd of an inch.
`'normalized'`	Normalized values for specifying the font size as a fraction of the uibuttongroup height. When you resize

Units Value	Description
	the uibuttongroup, MATLAB scales the displayed font to maintain that fraction.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

`FontWeight` — Font weight for the uibuttongroup title

`'normal'` (default) | `'bold'`

Font weight of uibuttongroup title, specified as a value from the following table.

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed in R2014b. If you specify either of these values, the result is a normal font weight.

`FontAngle` — Character slant of the uibuttongroup title

`'normal'` (default) | `'italic'`

Character slant of uibuttongroup title, specified as `'normal'` or `'italic'`. MATLAB uses this property to select a font from those available on your system. Setting this

property to `'italic'` selects a slanted version of the font, if it is available on your system.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

Text

`Title` — Uibuttongroup title

character vector

Uibuttongroup title, specified as a character vector.

MATLAB does not interpret a vertical slash (`'|'`) character as a line break, it displays as a vertical slash in the uibuttongroup title.

If you want to specify a Unicode character, pass the Unicode decimal code to the `char` function. For example, `['Multiples of ' char(960)]` displays as `Multiples of` π.

Example: `'Options'`

Example: `['Multiples of ' char(960)]`

`TitlePosition` — Location of uibuttongroup title

`'lefttop'` (default) | `'centertop'` | `'righttop'` | `'leftbottom'` | `'centerbottom'` | `'righttbottom'`

Location of the uibuttongroup title, specified as `'lefttop'`, `'centertop'`, `'righttop'`, `'leftbottom'`, `'centerbottom'`, or `'righttbottom'`.

Interactive Control

`SelectionChangedFcn` — Callback that executes when user selects a different button

`''` (default) | function handle | cell array | character vector

---

Note: The name of this property changed from `SelectionChangeFcn` to `SelectionChangedFcn` in R2014b.

Callback that executes when the user selects a different button, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback function executes when the user selects a different button within the uibuttongroup.

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes an object containing callback data as the second argument to the callback function. This object contains the properties described in this table. You can access these properties inside the callback function using dot notation.

Property	Description
`OldValue`	Previously selected button, or `[]` if none was selected
`NewValue`	Currently selected button
`Source`	The parent uibuttongroup object
`EventName`	`'SelectionChanged'`

Define a uibuttongroup `SelectionChangedFcn` callback to make your program respond when the user selects different buttons within the uibuttongroup. Do not code the response in the individual uicontrol `Callback` functions.

If you want another component to respond to the selection, then that component's callback function can access the selected radio button or toggle button from the uibuttongroup's `SelectedObject` property.

Example: `@myfun`

Example: `{@myfun,x}`

`ButtonDownFcn` — Button-press callback function

`''` (default) | function handle | cell array | character vector

Button-press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `ButtonDownFcn` callback is a function that executes when the user clicks a mouse button on the uibuttongroup.

`UIContextMenu` — Uibuttongroup context menu

empty `GraphicsPlaceholder` array (default) | uicontextmenu object

Uibuttongroup context menu, specified as a uicontextmenu object. Use this property to display a context menu when the user right-clicks on the uibuttongroup. Create the context menu using the `uicontextmenu` function.

`Selected` — Selection status of uibuttongroup

`'off'` (default) | `'on'`

Note: The behavior of the `Selected` property changed in R2014b, and it is not recommended. It no longer has any effect on uibuttongroups. This property might be removed in a future release.

`SelectionHighlight` — Ability to highlight selection handles

`'on'` (default) | `'off'`

Note: The behavior of the `SelectionHighlight` property changed in R2014b, and it is not recommended. It no longer has any effect on uibuttongroups. This property might be removed in a future release.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

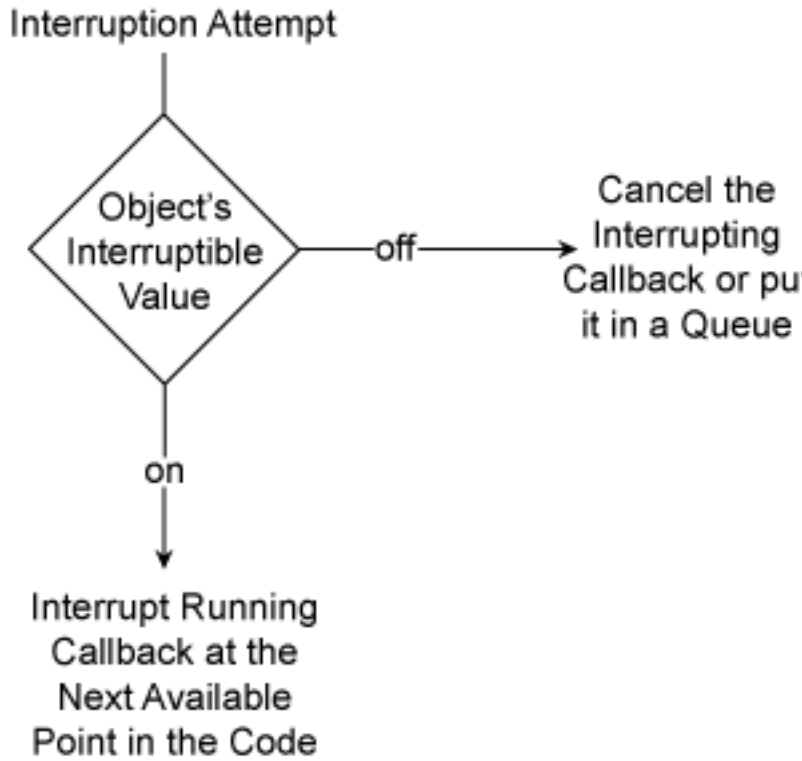

If a uibuttongroup callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See “Interrupt Callback Execution” for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

`HitTest` — Ability to become current object

`'on'` (default) | `'off'`

Ability to become current object, specified as `'on'` or `'off'`:

- Setting the value to `'on'` allows the uibuttongroup to become the current object when the user clicks on it. A value of `'on'` also allows the figure `CurrentObject` property and the `gco` function to report the uibuttongroup as the current object.
- Setting the value to `'off'` sets the figure `CurrentObject` property to an empty `GraphicsPlaceholder` array when the user clicks on the uibuttongroup.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uibuttongroup creation function

function handle | cell array | character vector

Uibuttongroup creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uibuttongroup. MATLAB initializes all uibuttongroup property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uibuttongroup that is being created.

Setting the `CreateFcn` property on an existing uibuttongroup has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uibuttongroup object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uibuttongroup deletion function

function handle | cell array | character vector

Uibuttongroup deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uibuttongroup (for example, when the end user deletes the figure). MATLAB executes the `DeleteFcn` callback before destroying the properties of the uibuttongroup. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uibuttongroup that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uibuttongroup'`

This property is read-only.

Type of graphics object, returned as `'uibuttongroup'`.

`Tag` — Uibuttongroup identifier

`''` (default) | character vector

Uibuttongroup identifier, specified as a character vector. This value to serves as an identifier for the uibuttongroup. When you need access to the uibuttongroup elsewhere in your code, you can use the `findobj` function to search for the uibuttongroup based on the `Tag` value.

Example: `'buttongroup1'`

Data Types: `char`

`UserData` — Data to associate with the uibuttongroup object

empty array (default) | array

Data to associate with the uibuttongroup object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See "Share Data Among Callbacks" for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

`SelectedObject` — Currently selected radio button or toggle button

uicontrol object | `[]`

Currently selected radio button or toggle button, specified as a uicontrol object.

Use this property to determine the currently selected button within a uibuttongroup. You can also use this property to set a default button selection. If you want no selection, then set this property to `[]`.

The default value of the `SelectedObject` property is the first uicontrol radio button or toggle button that you add to the uibuttongroup.

Note: The `SelectionChangedFcn` callback does not execute when you set the `SelectedObject` property programmatically.

Parent/Child

`Parent` — Uibuttongroup parent

figure | uipanel | uibuttongroup | uitab

Uibuttongroup parent, specified as a figure, uipanel, uibuttongroup, or uitab. You can move a uibuttongroup to a different figure, uipanel, uibuttongroup, or uitab by setting this property to the handle of the target figure, uipanel, uibuttongroup, or uitab.

`Children` — Children of uibuttongroup

empty `GraphicsPlaceholder` array (default) | 1-D array of component objects

Children of uibuttongroup, returned as an empty `GraphicsPlaceholder` or a 1-D array of component objects. Although a uibuttongroup manages only the user selection of radio

buttons and toggle buttons, its children can be axes, uipanels, uibuttongroups, and any style of uicontrol.

You cannot add or remove children using the `Children` property of the uibuttongroup. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the front-to-back order (stacking order) of the components on the screen.

To add a child to this list, set the `Parent` property of the child component to be the uibuttongroup object.

Objects with the `HandleVisibility` property set to `'off'` do not list in the `Children` property. For more information, see the `HandleVisibility` property description.

`HandleVisibility` — Visibility of uibuttongroup handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uibuttongroup handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uibuttongroup handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties. These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object's handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uibuttongroup handle is always visible.
`'callback'`	The uibuttongroup handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uibuttongroup at the command-line, but allows callback functions to access it.
`'off'`	The uibuttongroup handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

Note: Do not try to access radio buttons and toggle buttons that are managed by a `uibuttongroup` outside of the button group. Set the `HandleVisibility` of those radio buttons and toggle buttons to `'off'` to prevent accidental access.

See Also

See Also

`uibuttongroup` | `uicontrol`

Topics

"Access Property Values"
"Default Property Values"

uicontextmenu

Create context menu

Syntax

```
c = uicontextmenu
c = uicontextmenu(Name,Value)

c = uicontextmenu(parent)
c = uicontextmenu(parent,Name,Value)
```

Description

`c = uicontextmenu` creates a context menu in the current figure and returns the uicontextmenu object as `c`. If no figure is available, then MATLAB creates a new figure to serve as the parent.

`c = uicontextmenu(Name,Value)` specifies one or more uicontextmenu property names and corresponding values. Use this syntax to override the default uicontextmenu property values.

`c = uicontextmenu(parent)` creates a uicontextmenu and specifies the parent figure.

Note: Specifying a parent alone does not make the context menu accessible in the UI. You must also take these steps:

- Assign the uicontextmenu to a component using the `UIContextMenu` property.
- Create at least one child uimenu for the uicontextmenu.

See the "Tips" on page 1-11837 section for more information.

`c = uicontextmenu(parent,Name,Value)` specifies a parent figure and one or more uicontextmenu properties.

Examples

Context Menu Attached to a Plot Line

Specify a value for the line object's `UIContextMenu` property to attach a uicontextmenu to that line. The context menu becomes visible when the user right-clicks on the line. For instance, create a program file called `myprogram.m` that creates a plot and attaches a uicontextmenu to the plot line:

```
function myprogram

    f = figure('WindowStyle','normal');
    ax = axes;
    x = 0:100;
    y = x.^2;

    plotline = plot(x,y);
    c = uicontextmenu;

    % Assign the uicontextmenu to the plot line
    plotline.UIContextMenu = c;

    % Create child menu items for the uicontextmenu
    m1 = uimenu(c,'Label','dashed','Callback',@setlinestyle);
    m2 = uimenu(c,'Label','dotted','Callback',@setlinestyle);
    m3 = uimenu(c,'Label','solid','Callback',@setlinestyle);

        function setlinestyle(source,callbackdata)
            switch source.Label
                case 'dashed'
                    plotline.LineStyle = '--';
                case 'dotted'
                    plotline.LineStyle = ':';
                case 'solid'
                    plotline.LineStyle = '-';
            end
        end
end
```

The context menu appears when the user right-clicks the plot line.

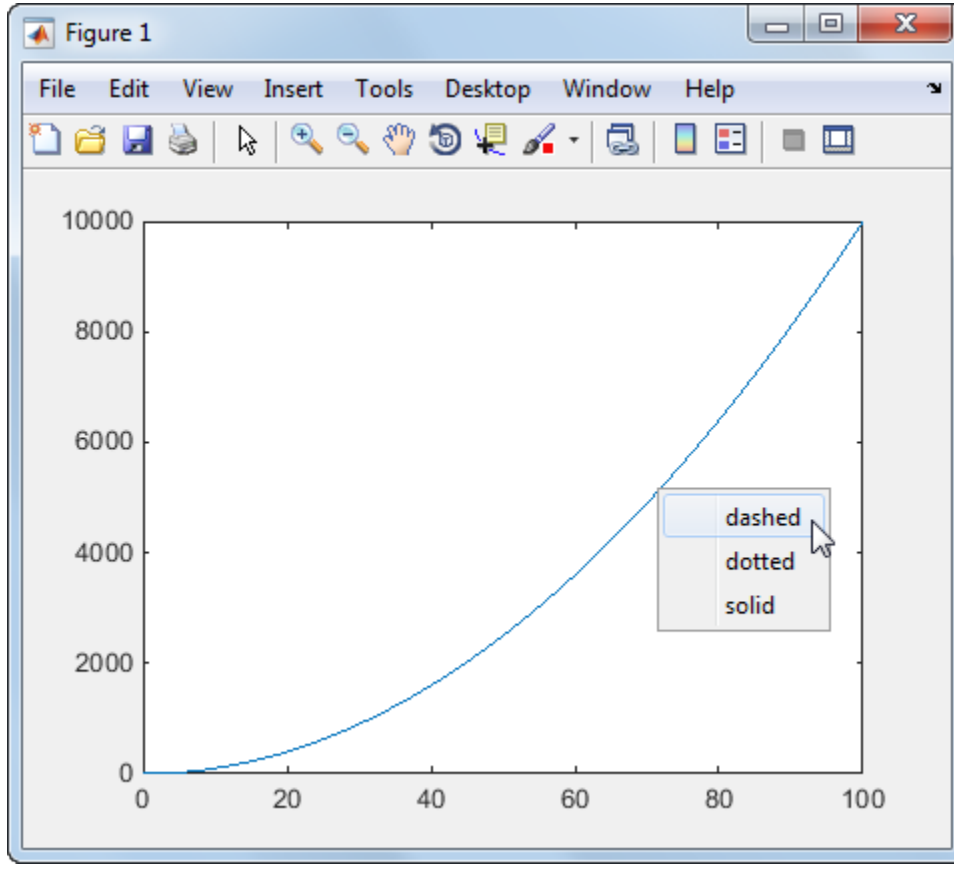

Selecting an item from the context menu changes the line style.

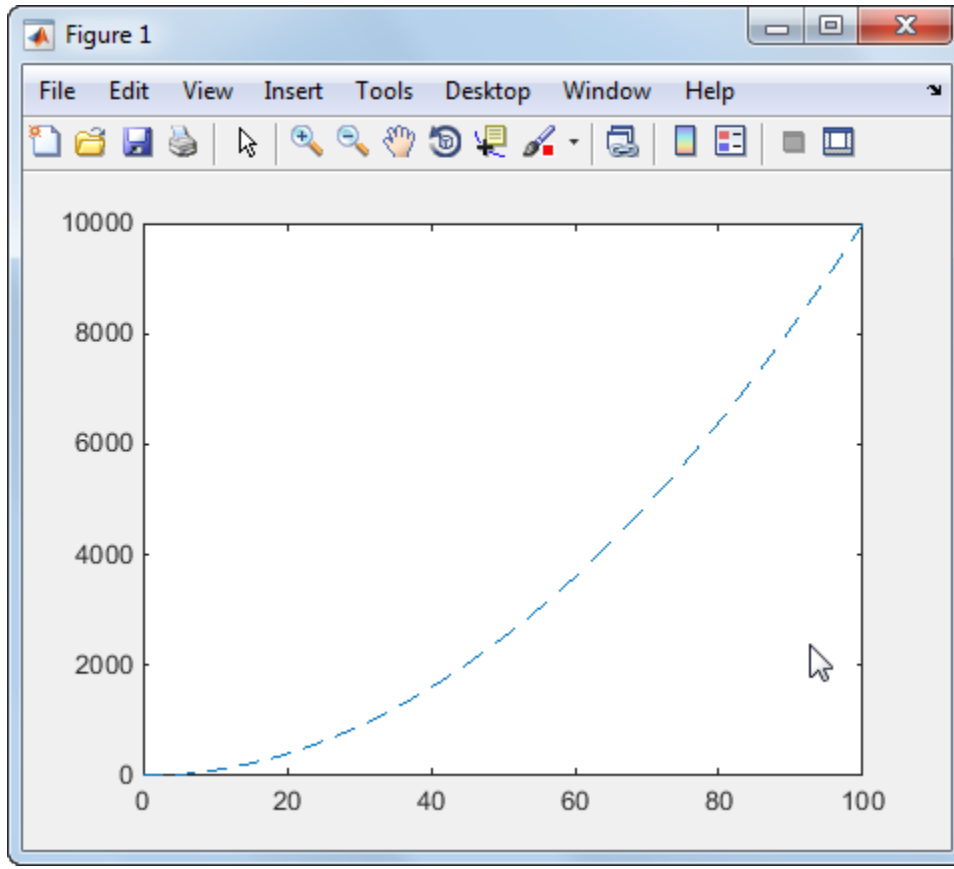

Context Menu with Submenus

Specify the `Parent` property value of any uimenu to make it into a submenu. For instance, create a program file called `myprogram2` that creates a uicontextmenu containing one top-level menu and two submenu items:

```
function myprogram2
    f = figure('WindowStyle','normal');
    c = uicontextmenu(f);

    % Assign the uicontextmenu to the figure
    f.UIContextMenu = c;
```

```
    % Create child menu of the uicontextmenu
    topmenu = uimenu('Parent',c,'Label','Change Color');

    % Create submenu items
    m1 = uimenu('Parent',topmenu,'Label','Red','Callback',@changecolor);
    m2 = uimenu('Parent',topmenu,'Label','Green','Callback',@changecolor);

    function changecolor(source,callbackdata)
        switch source.Label
            case 'Red'
                f.Color = [1.0 0.80 0.80];
            case 'Green'
                f.Color = [0.80 1.0 0.80];
        end
    end
end
```

The resulting context menu appears when the user right-clicks the mouse inside the figure.

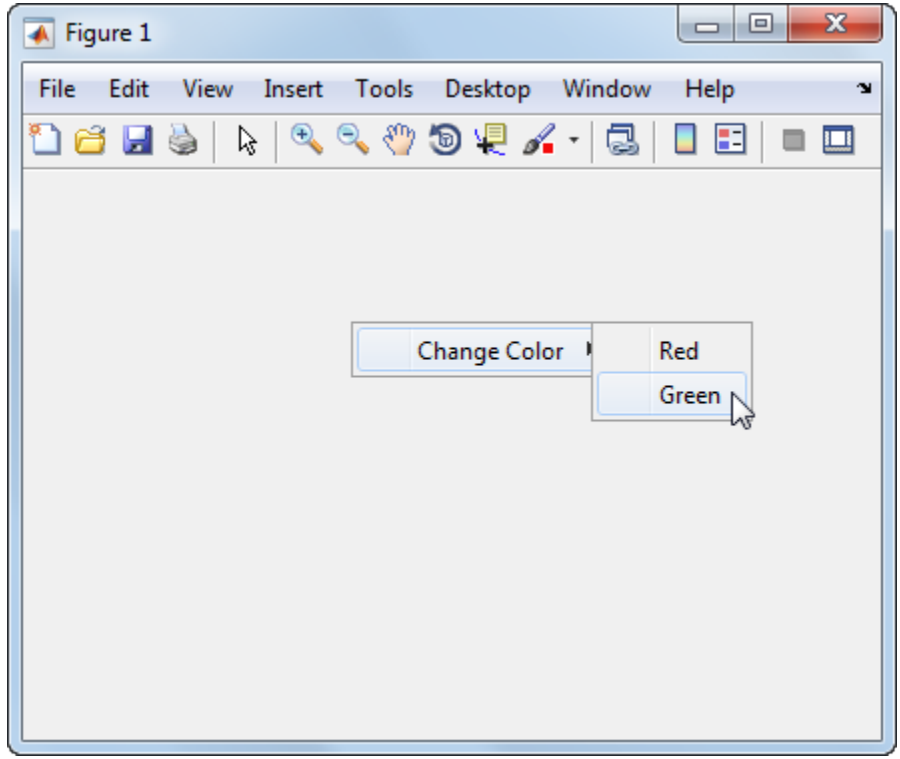

Selecting a color from the context menu changes the color of the window.

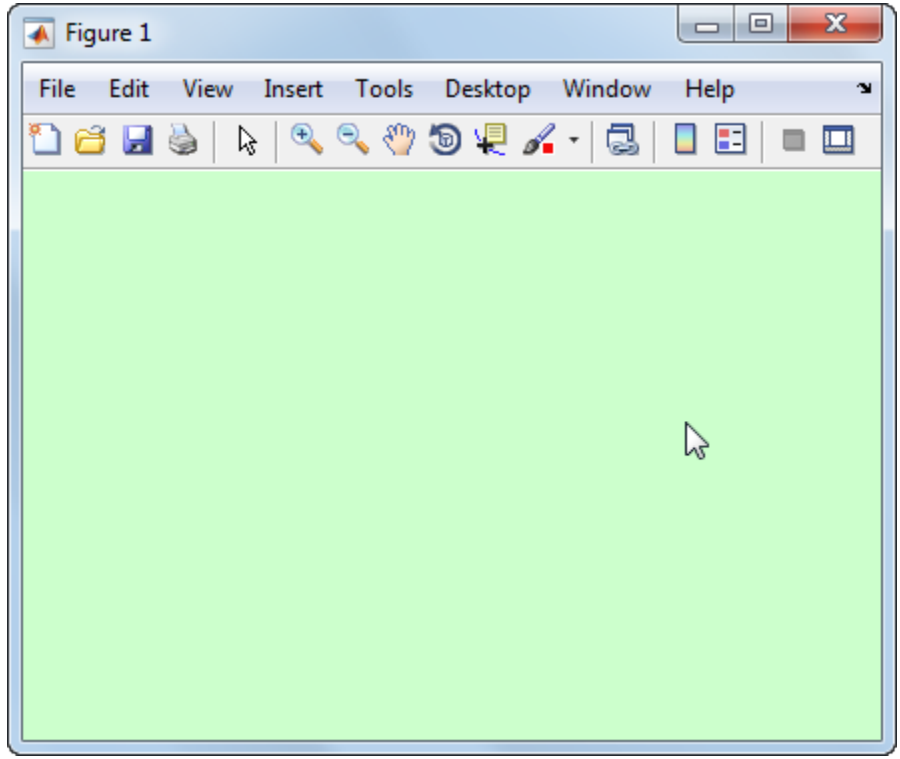

Input Arguments

`parent` — Parent figure
figure

Parent figure, specified as a figure object.

Name-Value Pair Arguments

The properties listed here are only a subset, for a complete list see Uicontextmenu Properties.

Example: `'Callback',@myfunction` specifies `myfunction` to be the function that executes when the user interacts with the context menu.

`'Callback'` — Callback function that executes when user selects the uicontextmenu

`''` (default) | function handle | cell array | character vector

Callback function that executes when user selects the uicontextmenu, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

Example: `@myfun`

Example: `{@myfun,x}`

Data Types: `function_handle` | `cell` | `char`

`'Children'` — Children of uicontextmenu

empty `GraphicsPlaceholder` array (default) | 1-D array of uimenu objects

Children of uicontextmenu, returned as an empty `GraphicsPlaceholder` or a 1-D array of uimenu objects. The children of uicontextmenus are other uimenus that function as submenus.

You cannot add or remove children using the `Children` property of the uicontextmenu. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the order of the displayed menu items.

To add a child to this list, set the `Parent` property of the child component to be the uicontextmenu object.

Objects with the `HandleVisibility` property set to `'off'` do not list in the `Children` property. For more information, see the `HandleVisibility` property description.

Tips

The context menu becomes accessible in the UI when these requirements are met:

- You assign the uicontextmenu to a component using the `UIContextMenu` property. The assigned component must be a child of the same figure as the uicontextmenu.
- You create at least one child uimenu for the uicontextmenu.

For example:

```
f = figure;
c = uicontextmenu(f);
% Create a new component and assign the uicontextmenu to it
b = uicontrol(f,'UIContextMenu',c);
% Create a child menu for the uicontextmenu
m = uimenu('Parent',c,'Label','Disable');
```

See Also

See Also

`uibuttongroup` | Uicontextmenu Properties | `uicontrol` | `uimenu` | `uipanel`

Introduced before R2006a

Uicontextmenu Properties

Control appearance and behavior of context menu

Description

A uicontextmenu is a context menu that appears when the user right-clicks on a graphics object or UI component. The `uicontextmenu` function creates a context menu and sets any required properties. By changing uicontextmenu property values, you can modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
c = uicontextmenu;
pos = c.Position;
c.Position = [20 20];
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Visible` — Uicontextmenu visibility
`'off'` (default) | `'on'`

Uicontextmenu visibility, specified as `'on'` or `'off'`. You can use the `Visible` property in one of two ways:

- Query the value to find out if the context menu is currently posted. The context menu is posted while the `Visible` property value is set to `'on'`.
- Set the `Visible` property to `'on'` to make the context menu to appear. Set this property to `'off'` to make the context menu to disappear.

Location and Size

`Position` — Uicontextmenu location
`[left bottom]`

Uicontextmenu location, specified as the vector, `[left bottom]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the figure to the left edge of the uicontextmenu
`bottom`	Distance from the inner bottom edge of the figure to the top edge of the uicontextmenu

The `Position` property defines the location of a context menu when its `Visible` property is set to `'on'`.

Data Types: `double`

Interactive Control

`Callback` — Callback function that executes when user selects the uicontextmenu

`''` (default) | function handle | cell array | character vector

Callback function that executes when user selects the uicontextmenu, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see “How to Specify Callback Property Values”.

Example: `@myfun`

Example: `{@myfun,x}`

Data Types: `function_handle` | `cell` | `char`

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

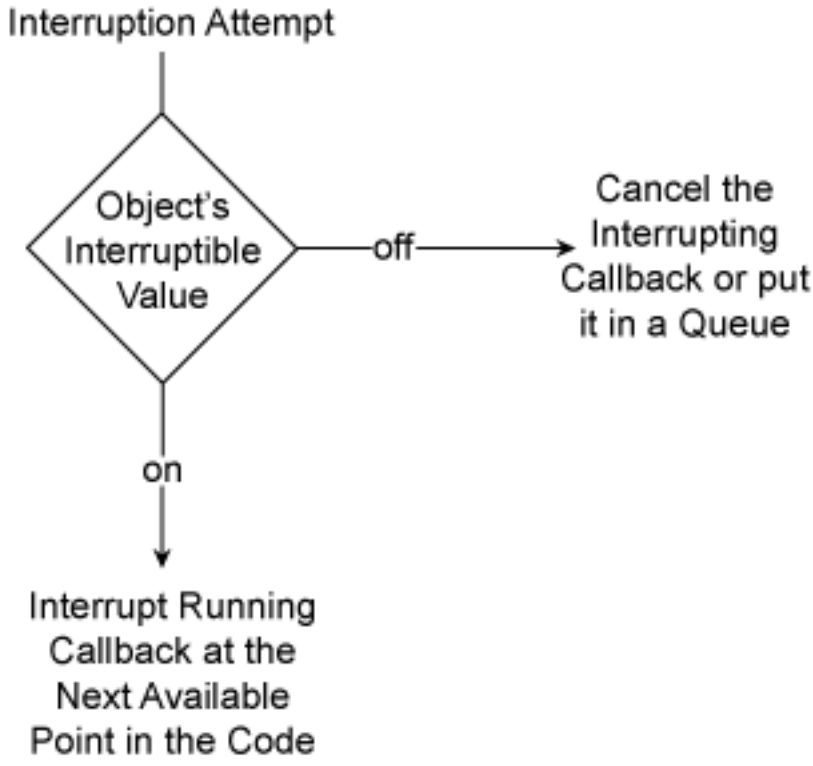

If a uicontextmenu callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See "Interrupt Callback Execution" for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uicontextmenu creation function

function handle | cell array | character vector

Uicontextmenu creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uicontextmenu. MATLAB initializes all uicontextmenu property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uicontextmenu that is being created.

Setting the `CreateFcn` property on an existing uicontextmenu has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uicontextmenu object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uicontextmenu deletion function

function handle | cell array | character vector

Uicontextmenu deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uicontextmenu (for example, when the end user deletes the figure). MATLAB

executes the `DeleteFcn` callback before destroying the properties of the uicontextmenu. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uicontextmenu that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uicontextmenu'`

This property is read-only.

Type of graphics object, returned as `'uicontextmenu'`.

`Tag` — Uicontextmenu identifier

`''` (default) | character vector

Uicontextmenu identifier, specified as a character vector. This value to serves as an identifier for the uicontextmenu. When you need access to the uicontextmenu elsewhere in your code, you can use the `findobj` function to search for the uicontextmenu based on the `Tag` value.

Example: `'contextmenu1'`

Data Types: `char`

`UserData` — Data to associate with the uicontextmenu object

empty array (default) | array

Data to associate with the uicontextmenu object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See “Share Data Among Callbacks” for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Uicontextmenu parent

figure

Uicontextmenu parent, specified as a figure. You can move a uicontextmenu to a different figure by setting this property to the handle of the target figure.

`Children` — Children of uicontextmenu

empty `GraphicsPlaceholder` array (default) | 1-D array of uimenu objects

Children of uicontextmenu, returned as an empty `GraphicsPlaceholder` or a 1-D array of uimenu objects. The children of uicontextmenus are other uimenus that function as submenus.

You cannot add or remove children using the `Children` property of the uicontextmenu. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the order of the displayed menu items.

To add a child to this list, set the `Parent` property of the child component to be the uicontextmenu object.

Objects with the `HandleVisibility` property set to `'off'` do not list in the `Children` property. For more information, see the `HandleVisibility` property description.

`HandleVisibility` — Visibility of Uicontextmenu handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uicontextmenu handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uicontextmenu handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties. These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object's handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uicontextmenu handle is always visible.

HandleVisibility Value	Description
`'callback'`	The uicontextmenu handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uicontextmenu at the command-line, but allows callback functions to access it.
`'off'`	The uicontextmenu handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

See Also

See Also

`uicontextmenu`

Topics

"Access Property Values"
"Default Property Values"

uicontrol

Create user interface control object

Syntax

```
c = uicontrol
c = uicontrol(Name,Value,...)
c = uicontrol(parent)
c = uicontrol(parent,Name,Value,...)
uicontrol(c)
```

Description

`c = uicontrol` creates a uicontrol (push button) in the current figure and returns the uicontrol object, `c`. If there is no figure available, then MATLAB creates a new figure to serve as the parent.

`c = uicontrol(Name,Value,...)` creates a uicontrol and specifies one or more uicontrol property names and corresponding values. Use this syntax to override the default uicontrol properties. The default uicontrol style is `'pushbutton'`.

`c = uicontrol(parent)` creates a uicontrol and designates a specific parent object. The `parent` argument can be a figure, uipanel, uibuttongroup, or uitab object.

`c = uicontrol(parent,Name,Value,...)` creates a uicontrol with a specific parent and one or more uicontrol properties.

`uicontrol(c)` gives focus to a specific uicontrol object, `c`.

Specifying the Uicontrol Style

When selected, most uicontrol objects perform a predefined action. To create a specific type of uicontrol, set the `Style` property as one of the following values. You can specify part of the `Style` value if it is unique among all the styles. For example, instead of `'radiobutton'`, you can specify `'radio'`.

- `'checkbox'` – A check box generates an action when you select it. Use check boxes to provide a number of independent choices. To activate a check box, click the mouse button on the object. The check box updates its appearance when its state changes.
- `'edit'` – Editable text fields enable you to enter or modify text values. Use editable text when you want free text as input. To enable multiple lines of text, set `Max-Min>1`. Multiline edit boxes provide a vertical scroll bar for scrolling. The arrow keys also provide a way to scroll. Obtain the current text by getting the `String` property. The `String` property does not update as you type in an edit box. To execute the callback routine for an edit text control, type in the desired text and then do one of the following:
  - Click another component, the menu bar, or elsewhere on the window.
  - For a single line editable text box, press **Enter**.
  - For a multiline editable text box, press **Ctl+Enter**.
- `'frame'`

  Note MathWorks recommends you use `uipanel` or `uibuttongroup` instead of frames.

  GUIDE continues to support frames in UIs that contain them, but the frame component does not appear in the GUIDE Layout Editor component palette.
- `'listbox'` – List boxes display a list of items, from which you can select one or more items. Unlike pop-up menus, list boxes do not expand when clicked. The `Min` and `Max` properties control the selection mode:
  - To enable multiple selection of items, set `Max-Min > 1`.
  - To enable selection of only one item at a time, set `Max-Min <= 1`

  The `Value` property stores the row indexes of currently selected list box items, and is a vector value when you select multiple items. After any mouse button up event that changes the `Value` property, MATLAB evaluates the list box's callback routine. To delay action when multiple items can be selected, you can associate a "Done" push button with the list box. Use the callback for that button to evaluate the list box `Value` property.

  List boxes with the `Enable` property set to `on` differentiate between single and double left clicks. MATLAB sets the figure `SelectionType` property to `normal` or `open` accordingly before evaluating the list box `Callback` property. For enabled list boxes,

Ctrl-left click and **Shift**-left click also set the figure `SelectionType` property to `normal` or `open`, respectively indicating a single or double click.

- `'popupmenu'` – Pop-up menus (also known as drop-down menus) display a list of choices when you open them with a button-press. When closed, a pop-up menu indicates the current choice. Pop-up menus are useful when you want to provide a number of mutually exclusive choices, but do not want to take up the amount of space that a group of radio buttons requires.
- `'pushbutton'` – Push buttons generate an action when activated. Left-click a push button to activate it. The button appears to depress until you release the mouse button. The callback activates when you release the mouse button while still pointing within the push button.
- `'radiobutton'` – Radio buttons are similar to check boxes, but are intended to be mutually exclusive within a group of related radio buttons. When used this way, you can only select one radio button at any given time. To activate a radio button, click and release the mouse button over it. The easiest way to implement mutually exclusive behavior for a set of radio buttons is to place them within a `uibuttongroup`.
- `'slider'` – Sliders accept numeric input within a specific range when you move the "thumb" button along a bar. The location of the thumb indicates a numeric value, assigned to the `Value` property when you release the mouse button. You can set the minimum, maximum, and current values, and step sizes of a slider.

  Move the thumb by doing any one of the following:

  - Press the mouse button on the thumb, and drag it along the bar.
  - Click in the bar or on arrow buttons located at both ends of the bar.
  - Click the keyboard arrow keys when the slider is in focus.
- `'text'` – Static text boxes display lines of text. You typically use static text to label other controls, provide information to the user, or indicate values associated with a slider. If you assign the `Callback` property of a static text object to a function (or a character vector containing a MATLAB command), the static text will not respond when users try to interact with the text. However, you can code the `ButtonDownFcn` callback to respond to mouse clicks on the static text. See "Tips" on page 1-11853 for more information.
- `'togglebutton'` – Toggle buttons are similar in appearance to push buttons, but they visually indicate their state, either `'on'` (depressed) or `'off'` (up). Clicking a toggle button changes its state, and switches its `Value` property between the toggle button's `Min` and `Max` values.

Examples

Create uicontrols to allow users to adjust the appearance of a plot. For instance, create a program file called `myui.m` that contains the following code.

```
function myui
   % Create a figure and axes
   f = figure('Visible','off');
   ax = axes('Units','pixels');
   surf(peaks)

   % Create pop-up menu
   popup = uicontrol('Style', 'popup',...
          'String', {'parula','jet','hsv','hot','cool','gray'},...
          'Position', [20 340 100 50],...
          'Callback', @setmap);

  % Create push button
   btn = uicontrol('Style', 'pushbutton', 'String', 'Clear',...
       'Position', [20 20 50 20],...
       'Callback', 'cla');

  % Create slider
   sld = uicontrol('Style', 'slider',...
       'Min',1,'Max',50,'Value',41,...
       'Position', [400 20 120 20],...
       'Callback', @surfzlim);

   % Add a text uicontrol to label the slider.
   txt = uicontrol('Style','text',...
       'Position',[400 45 120 20],...
       'String','Vertical Exaggeration');

   % Make figure visble after adding all components
   f.Visible = 'on';
   % This code uses dot notation to set properties.
   % Dot notation runs in R2014b and later.
   % For R2014a and earlier: set(f,'Visible','on');

   function setmap(source,event)
       val = source.Value;
       maps = source.String;
       % For R2014a and earlier:
       % val = get(source,'Value');
```

```
        % maps = get(source,'String');

        newmap = maps{val};
        colormap(newmap);
    end

    function surfzlim(source,event)
        val = 51 - source.Value;
        % For R2014a and earlier:
        % val = 51 - get(source,'Value');

        zlim(ax,[-val val]);
    end
end
```

The resulting UI displays a plot. Users can adjust the color map, change the vertical scaling, or clear the axes.

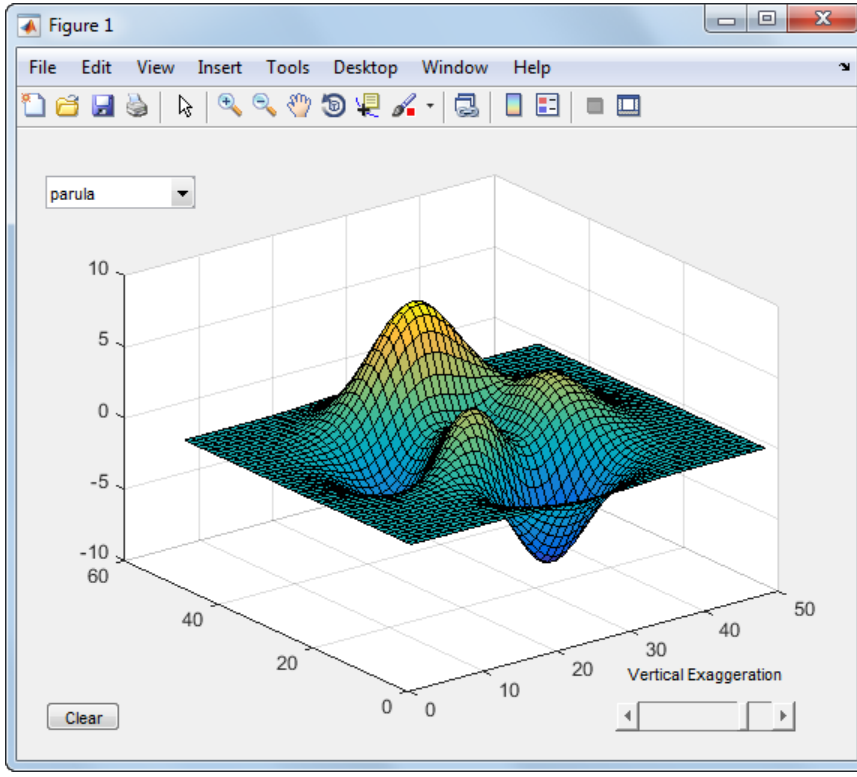

Tips

- To make static text respond to mouse clicks, set the text object's `Enable` property to `'Inactive'`. Then, define a `ButtonDownFcn` callback that responds when the user clicks on the text. For example, the following code displays `'Text was clicked'` in the Command Window when the user clicks on the text in the UI.

  ```
  mytxt = uicontrol('Style','text','String','Click Me!');
  mytxt.Enable = 'Inactive';
  mytxt.ButtonDownFcn = 'disp(''Text was clicked'')';
  ```

  Note that this code uses dot notation to set properties. Dot notation runs in R2014b and later. If you are using an earlier release, use the `set` function instead.

See Also

See Also

`figure` | `uibuttongroup` | Uicontrol Properties

Topics

"Callbacks for Specific Components"
"Access Property Values"

Introduced before R2006a

Uicontrol Properties

Control appearance and behavior of user interface control

Description

Uicontrols are interface components, such as buttons and sliders, that users can interact with. The `uicontrol` function creates an interface component and sets any required properties before displaying it. By changing uicontrol property values, you can modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
b = uicontrol('Style','pushbutton');
pos = b.Position;
b.Position = [100 100 50 20];
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Visible` — Uicontrol visibility
`'on'` (default) | `'off'`

Uicontrol visibility, specified as `'on'` or `'off'`. When `Visible` is `'off'`, the uicontrol is not visible, but you can query and set its properties.

To make your app start faster, set the `Visible` property of all uicontrols that are not initially displayed to `'off'`.

`BackgroundColor` — Uicontrol background color
`[.94 .94 .94]` (default) | RGB triplet | short name | long name

Uicontrol background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the uicontrol.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Data Types: double | char

ForegroundColor — Uicontrol text color
[0 0 0] (default) | RGB triplet | short name | long name

Uicontrol text color, specified as an RGB triplet, short name, or long name from the table below.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]

Long Name	Short Name	RGB Triplet
`'black'`	`'k'`	`[0 0 0]`

Note: If you change the value of `ForegroundColor` for a listbox, then MATLAB uses that color for all listbox items, except for the currently selected listbox item. For selected items, MATLAB uses a color that ensures good contrast between the text of selected items and the selection color.

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

Data Types: `double` | `char`

`CData` — Optional image to display on uicontrol

3-D array of truecolor RGB values

Optional image to display on the uicontrol, specified as a 3-D array of truecolor RGB values. The values in the array can be:

- Double-precision values between `0.0` and `1.0`
- `uint8` values between `0` and `255`

Push buttons and toggle buttons are the only uicontrols that fully support `CData`. If you specify the `CData` property for a radio button or check box, the image might overlap with the text. Also, specifying an image for radio button or check box disables the ability to show when they are selected or deselected.

Example: `zeros(16,16,3)`

Example: `uint8(zeros(16,16,3))`

Data Types: `double` | `uint8`

Location and Size

`Position` — Location and size of uicontrol

`[left bottom width height]`

Location and size of the uicontrol, specified as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the uicontrol
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the uicontrol
`width`	Distance between the right and left outer edges of the uicontrol
`height`	Distance between the top and bottom outer edges of the uicontrol

All measurements are in units specified by the `Units` property.

Note: The `Position` values are relative to the parent container's *drawable area*. The drawable area is the area inside the borders of the container and does not include the area occupied by the title. If the parent container is a figure, then the drawable area also excludes the menu bar and tool bar.

Modify One Value in the Position Vector

You can combine dot notation and array indexing when you want to change one value in the `Position` vector. For example, this code changes the width of the uicontrol to `52`:

```
b = uicontrol;
b.Position(3) = 52;
b.Position
```

```
ans =

    20    20    52    20
```

`OuterPosition` — Location and size of uicontrol

`[left bottom width height]`

Location and size of the uicontrol, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `InnerPosition` property values.

`InnerPosition` — Location and size of uicontrol
`[left bottom width height]`

Location and size of the uicontrol, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `OuterPosition` property values.

`Units` — Units of measurement
`'pixels'` (default) | `'normalized'` | `'inches'` | `'centimeters'` | `'points'` | `'characters'`

Units of measurement, specified one of the values from this table.

Units Value	Description
`'pixels'` (default)	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.
`'normalized'`	These units are normalized with respect to the parent container. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'points'`	Points. One point equals 1/72nd of an inch.
`'characters'`	These units are based on the default uicontrol font of the graphics root object:

Units Value	Description
	• Character width = width of the letter `x`. • Character height = distance between the baselines of two lines of text. To access the default uicontrol font, use `get(groot,'defaultuicontrolFontName')` or `set(groot,'defaultuicontrolFontName')`.

MATLAB measures all units from the lower left corner of the parent object.

This property affects the `Position` property. If you change the `Units` property, consider returning its value to the default value after completing your computation to avoid affecting other functions that assume the default value.

The order in which you specify the `Units` and `Position` properties has these effects:

- If you specify the `Units` before the `Position` property, then MATLAB sets `Position` using the units you specify.
- If you specify the `Units` property after the `Position` property, MATLAB sets the position using the default `Units`. Then, MATLAB converts the `Position` value to the equivalent value in the units you specify.

`Extent` — Size of uicontrol rectangle

four-element row vector

This property is read-only.

Size of uicontrol rectangle, returned as a four-element row vector. The first two elements of the vector are always zero. The third and fourth elements are the width and height of the rectangle containing the uicontrol, respectively. All measurements are in units specified by the `Units` property.

MATLAB determines the size of the rectangle based on the size of the `String` property value and the font characteristics. To adjust the width and height of the uicontrol to accommodate the size of the `String` value, set the `Position` width and height values to be slightly larger than the `Extent` width and height values.

For a `String` value that is a single line of text, the height element of the `Extent` property indicates the height of a single line. The width element indicates the width

of the longest line, even if the text wraps when displayed on the control. For multiple lines of text, the `Extent` rectangle encompasses all lines of text. Editable text fields are considered multiline if `Max` – `Min` > `1`.

Font Style

`FontName` — Font for displaying uicontrol text

system supported font name | `'FixedWidth'`

Font for displaying the uicontrol text, specified as a system supported font name or `'FixedWidth'`. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, specify 'FixedWidth'. The actual fixed-width font used depends on the FixedWidthFontName property of the root object. Changing the `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Arial'`

`FontSize` — Font size for uicontrol text

positive number

Font size for the uicontrol text, specified as a positive number. The `FontUnits` property specifies the units. The default size is system-dependent.

Example: `12`

Example: `12.5`

`FontUnits` — Units of font size for uicontrol text

`'points'` (default) | `'normalized'` | `'inches'` | `'centimeters'` | `'pixels'`

Units of font size for the uicontrol text, specified as one of the values from this table.

Units Value	Description
`'points'`	Points. One point is 1/72nd of an inch.
`'normalized'`	Normalized values for specifying the font size as a fraction of the uicontrol height. When you resize the uicontrol, MATLAB scales the displayed font to maintain that fraction.
`'inches'`	Inches.

Units Value	Description
`'centimeters'`	Centimeters.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

`FontWeight` — Font weight for uicontrol text

`'normal'` (default) | `'bold'`

Font weight for the uicontrol text, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed in R2014b. If you specify either of these values, the result is a normal font weight.

`FontAngle` — Character slant of uicontrol text

`'normal'` (default) | `'italic'`

Character slant of uicontrol text, specified as `'normal'` or `'italic'`. MATLAB uses this property to select a font from those available on your system. Setting this property to `'italic'` selects a slanted version of the font, if it is available on your system.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

Text

`String` — Text to display

character vector | cell array of character vectors | pipe-delimited row vector | padded column matrix

Text to display, specified as a character vector, cell array of character vectors, a pipe-delimited row vector, or a padded column matrix. The uicontrol Style property value determines the array format you can use.

Style Property Value	Supported Array Formats	Examples
`'checkbox'`	• Character vector • Cell array of character vectors	`'Item 1'` `{'Item 1'}`
`'edit'`	• Character vector • Cell array of character vectors	`'Default text'` `{'Default text'}`
`'pushbutton'`	• Character vector • Cell array of character vectors	`'Evaluate'` `{'Evaluate'}`
`'radiobutton'`	• Character vector • Cell array of character vectors	`'Round to nearest integer'` `{'Round to nearest integer'}`
`'text'`	• Character vector • Cell array of character vectors	`'Enter values'` `{'Enter values'}`
`'togglebutton'`	• Character vector • Cell array of character vectors	`'Activate'` `{'Activate'}`

`'listbox'`	• Character vector
	• Cell array of character vectors
	• Pipe-delimited row vector
		`'Red'`
		`{'Red','Blue','Orange'}`
		`'Red|Blue|Orange'`
		`['Red  ';'Blue  ';'Orange']`

Style Property Value	Supported Array Formats	Examples
	• Padded column matrix	

`'popupmenu'`	• Character vector
	• Cell array of character vectors
	• Pipe-delimited row vector
	• Padded column matrix
		`'Red'`
		`{'Red','Blue','Orange'}`
		`'Red|Blue|Orange'`
		`['Red  ';'Blue  ';'Orange']`

Note: Some important characteristics of the `String` property:

- If you specify a cell array for a check box, push button, radio button, or toggle button, then MATLAB displays only the first element in the cell array.
- If you specify a cell array for a list box, each element the cell array corresponds to a separate list item in most cases. Newline characters inserted using `sprintf` will result in more list items.
- If you want to specify multiple lines of text of different lengths, specify the each line of text as a separate element in a cell array. For example, you might use a cell array to display sentences in separate paragraphs.
- If you programmatically replace the contents of an `'edit'` style of uicontrol, the cursor moves to the beginning of the text.
- If you want to specify a Unicode character, pass the Unicode decimal code to the `char` function. For example, `['Multiples of ' char(960)]` displays as `Multiples of` π.

Data Types: `char`

`HorizontalAlignment` — Alignment of uicontrol text

`'center'` (default) | `'left'` | `'right'`

Alignment of the uicontrol text, specified as `'center'`, `'left'`, or `'right'`. This property determines the justification of the `String` property text.

The `HorizontalAlignment` property affects only `'text'` and `'edit'` styles of uicontrols.

Interactive Control

`Callback` — Callback function that executes when user interacts with uicontrol

`''` (default) | function handle | cell array | character vector

Callback function that executes when user interacts with the uicontrol, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This function executes in response to user interaction, such as push button clicks, slider movements, or check box selections. This function can execute only when the `Enable` property of the uicontrol is set to `'on'`.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

Data Types: `function_handle` | `cell` | `char`

`ButtonDownFcn` — Button-press callback function

`''` (default) | function handle | cell array | character vector

Button-press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `ButtonDownFcn` callback is a function that executes when the user clicks a mouse button on the uicontrol. The callback executes in the following situations:

- The user right-clicks the uicontrol, and the uicontrol `Enable` property is set to `'on'`.
- The user right-clicks or left-clicks the Uicontrol, and the uicontrol `Enable` property is set to `'off'` or `'inactive'`.

`KeyPressFcn` — Key press callback function

`''` (default) | function handle | cell array | character vector

Key press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback function executes when the uicontrol object has focus and the user presses a key. If you do not define a function for this property, MATLAB passes key presses to the parent figure. Repeated key presses retain the focus of the uicontrol, and the function executes with each key press. If the user presses multiple keys at approximately the same time, MATLAB detects the key press for the last key pressed.

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes an object containing callback data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation.

Property	Description	Examples:			
		a	=	Shift	Shift-a
`Character`	The character that displays as a result of pressing a key or keys. The character can be empty or unprintable.	`'a'`	`'='`	`''`	`'A'`

Property	Description	Examples:			
		a	=	Shift	Shift-a
`Modifier`	A cell array containing the names of one or more modifier keys that are being pressed (such as, **Ctrl**, **Alt**, **Shift**).	`{1x0 cell}`	`{1x0 cell}`	`{'shift'}`	`{'shift'}`
`Key`	The key being pressed, identified by the (lowercase) label on the key, or a text description.	`'a'`	`'equal'`	`'shift'`	`'a'`
`Source`	The object that has focus when the user presses the key.	uicontrol object	uicontrol object	uicontrol object	uicontrol object
`EventName`	The action that caused the callback function to execute.	`'KeyPre`	`'KeyPre`	`'KeyPress`	`'KeyPress'`

Pressing modifier keys affects the callback data in the following ways:

- Modifier keys can affect the `Character` property, but do not change the `Key` property.
- Certain keys, and keys modified with **Ctrl**, put unprintable characters in the `Character` property.
- **Ctrl**, **Alt**, **Shift**, and several other keys, do not generate `Character` property data.

You also can query the `CurrentCharacter` property of the figure to determine which character the user pressed.

`KeyReleaseFcn` — Key-release callback function

`''` (default) | function handle | cell array | character vector

Key-release callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see “How to Specify Callback Property Values”.

This callback function executes when the uicontrol object has focus and the user releases a key.

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes an object containing callback data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation.

Property	Description	Examples:			
		a	=	Shift	Shift-a
`Character`	Character interpretation of the key that was released.	`'a'`	`'='`	`''`	`'A'`
`Modifier`	Current modifier, such as `'control'`, or an empty cell array if there is no modifier.	`{1x0 cell}`	`{1x0 cell}`	`{1x0 cell}`	`{1x0 cell}`
`Key`	Name of the key that was released, identified by the lowercase label on the key, or a text description.	`'a'`	`'equal'`	`'shift'`	`'a'`
`Source`	The object that has focus when the user presses the key.	uicontrol object	uicontrol object	uicontrol object	uicontrol object
`EventName`	The action that caused the callback function to execute.	`'ase'`	`'ase'`	`'ase'`	`'ase'`

Pressing modifier keys affects the callback data in the following ways:

- Modifier keys can affect the `Character` property, but do not change the `Key` property.
- Certain keys, and keys modified with **Ctrl**, put unprintable characters in the `Character` property.
- **Ctrl**, **Alt**, **Shift**, and several other keys, do not generate `Character` property data.

You also can query the `CurrentCharacter` property of the figure to determine which character the user pressed.

`Enable` — Operational state of uicontrol

`'on'` (default) | `'off'` | `'inactive'`

Operational state of the uicontrol, specified as `'on'`, `'off'`, or `'inactive'`. The `Enable` property controls whether or not the uicontrol responds to user interaction. These are the possible values:

- `'on'` – The uicontrol is operational.
- `'off'` – The uicontrol is not operational and appears grayed-out.
- `'inactive'` – The uicontrol is not operational, but it has the same appearance as when `Enable` is set to `'on'`.

`TooltipString` — Tooltip text
character vector

Tooltip text, specified as a character vector (e.g., `'Hello World'`). When the user hovers the mouse pointer over the uicontrol and leaves it there, the tooltip displays. If you want to create a tooltip that has more than one line of text, use `sprintf` to generate a character vector containing the newline (`\n`) characters. Then set the `TooltipString` to the value returned by `sprintf`.

Specify TooltipString Containing Two Lines

```
b = uicontrol;
s = sprintf('Tooltip line 1\nTooltip line 2');
b.TooltipString = s;
```

`UIContextMenu` — Uicontrol context menu
empty `GraphicsPlaceholder` array (default) | uicontextmenu object

Uicontrol context menu, specified as a uicontextmenu object. Use this property to display a context menu when the user right-clicks on the uicontrol. Create the context menu using the `uicontextmenu` function.

`Selected` — Selection status of uicontrol
`'off'` (default) | `'on'`

Note: The behavior of the `Selected` property changed in R2014b, and it is not recommended. It no longer has any effect on uicontrols. This property might be removed in a future release.

`SelectionHighlight` — Ability to highlight selection handles

`'on'` (default) | `'off'`

Note: The behavior of the `SelectionHighlight` property changed in R2014b, and it is not recommended. It no longer has any effect on uicontrols. This property might be removed in a future release.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

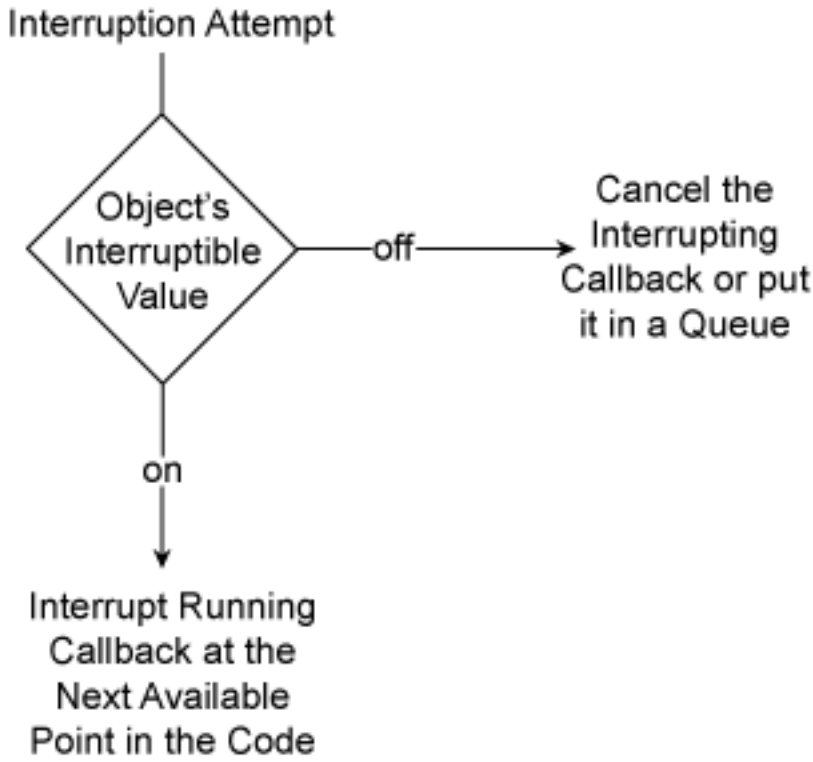

If a uicontrol callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See "Interrupt Callback Execution" for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

`HitTest` — Ability to become current object

`'on'` (default) | `'off'`

This property has no effect on the uicontrol.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uicontrol creation function

function handle | cell array | character vector

Uicontrol creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.

- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uicontrol. MATLAB initializes all uicontrol property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uicontrol that is being created.

Setting the `CreateFcn` property on an existing uicontrol has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uicontrol object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uicontrol deletion function

function handle | cell array | character vector

Uicontrol deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uicontrol (for example, when the end user deletes the figure). MATLAB executes the `DeleteFcn` callback before destroying the properties of the uicontrol. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uicontrol that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uicontrol'`

This property is read-only.

Type of graphics object, returned as `'uicontrol'`.

`Tag` — Uicontrol identifier

`''` (default) | character vector

Uicontrol identifier, specified as a character vector. This value to serves as an identifier for the uicontrol. When you need access to the uicontrol elsewhere in your code, you can use the `findobj` function to search for the uicontrol based on the `Tag` value.

Example: `'pushbutton1'`

Data Types: `char`

`UserData` — Data to associate with the uicontrol object

empty array (default) | array

Data to associate with the uicontrol object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See "Share Data Among Callbacks" for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Uicontrol parent

figure | uipanel | uibuttongroup | uitab

Uicontrol parent, specified as a figure, uipanel, uibuttongroup, or uitab. You can move a uicontrol to a different figure, uipanel, uibuttongroup, or uitab by setting this property to the handle of the target figure, uipanel, uibuttongroup, or uitab.

`Children` — Children of uicontrol

empty array

Children of uicontrol, returned as an empty array. Uicontrol objects have no children. Setting this property has no effect.

`HandleVisibility` — Visibility of uicontrol handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uicontrol handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uicontrol handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties. These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object's handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uicontrol handle is always visible.
`'callback'`	The uicontrol handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uicontrol at the command-line, but allows callback functions to access it.
`'off'`	The uicontrol handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

Note: Do not try to access radio buttons and toggle buttons that are managed by a `uibuttongroup` outside of the button group. Set the `HandleVisibility` of those radio buttons and toggle buttons to `'off'` to prevent accidental access.

Type of Control

`Style` — Style of uicontrol

`'pushbutton'` (default) | character vector

Style of uicontrol, specified as one value from the following table. See "Specifying the Uicontrol Style" on page 1-11848 for more details about each style.

Style Value	Description
`'pushbutton'`	Button that appears to depress until you release the mouse button.
`'togglebutton'`	Button that can have two states: up or depressed. The state of the toggle button changes every time you click it.
`'checkbox'`	Check box that can have two states: checked or unchecked. The state changes when the user clicks and releases the mouse button over it.
`'radiobutton'`	Button that can have two states: selected or deselected. Radio buttons are intended to be mutually exclusive within a group of related radio buttons.
`'edit'`	Editable text field.
`'text'`	Static text field.
`'slider'`	Button that the user pushes along a horizontal or vertical bar. The position of the button indicates a value within a specified range.
`'listbox'`	List of items from which the user can select one or more items. Unlike pop-up menus, list boxes do not expand when clicked.
`'popupmenu'`	Isolated menu that expands to display a list of choices when you click it. When it is collapsed, the menu shows the current choice.

`Value` — Current value of uicontrol

number

Current value of uicontrol, specified as a number. The `Value` property is useful in querying or modifying the status of certain uicontrols:

Style of uicontrol	Description of Value Property
`'togglebutton'`	• **Raised:** `Value` property equals the value of the `Min` property. • **Depressed:** `Value` property equals the value of the `Max` property.
`'checkbox'`	• **Unchecked:** `Value` property changes to the value of the `Min` property. • **Checked:** `Value` property changes to the value of the `Max` property.
`'radiobutton'`	• **Deselected:** `Value` property changes to the value of the `Min` property. • **Selected:** `Value` property changes to the value of the `Max` property.
`'slider'`	`Value` property equals the corresponding slider value.
`'listbox'`	`Value` property equals an array index corresponding to the selected item in the list box. A value of `1` corresponds to the first item in the list.
`'popupmenu'`	`Value` property equals an array index corresponding to the selected item in the pop-up menu. A value of `1` corresponds to the first item in the pop-up menu.

`Max` — Maximum value of uicontrol

`1` (default) | number

Maximum value of uicontrol, specified as a number. The `Max` property affects the presentation of certain uicontrols:

Style of uicontrol	Description of Value Property
`'togglebutton'`	When the toggle button is depressed, the `Value` property changes to the value of the `Max` property.

Style of uicontrol	Description of Value Property
`'checkbox'`	When the check box is checked, the `Value` property changes to the value of the `Max` property.
`'radiobutton'`	When the radio button is selected, the `Value` property changes to the value of the `Max` property.
`'edit'`	The edit text box accepts multiple lines of input when `Max` – `Min` > `1`. Otherwise, the edit text box accepts a single line of input. The absolute values of `Max` and `Min` have no effect on the number of possible lines. As long as the difference is greater than `1`, the edit box can contain any number of lines.
`'slider'`	The `Max` property value is the maximum slider value, which must be greater than the `Min` property value.
`'listbox'`	The `Max` property value helps determine whether the user can select multiple items in the list box simultaneously. If `Max` – `Min` > 1, then the user can select multiple items simultaneously. Otherwise, the user cannot select multiple items simultaneously. If you set the `Max` and `Min` properties to allow multiple selections, then the `Value` property value can be a vector of indices.

`Min` — Minimum value of uicontrol

`0` (default) | number

Minimum value of uicontrol, specified as a number. The `Min` property affects the presentation of certain uicontrols:

Style of uicontrol	Description of Value Property
`'togglebutton'`	When the toggle button is raised, the `Value` property changes to the value of the `Min` property.
`'checkbox'`	When the check box is unchecked, the `Value` property changes to the value of the `Min` property.
`'radiobutton'`	When the radio button is deselected, the `Value` property changes to the value of the `Min` property.

Style of uicontrol	Description of Value Property
`'edit'`	The edit text box accepts multiple lines of input when `Max` – `Min` > `1`. Otherwise, the edit text box accepts a single line of input. The absolute values of `Max` and `Min` have no effect on the number of possible lines. As long as the difference is greater than `1`, the edit box can contain any number of lines.
`'slider'`	The `Min` property value is the minimum slider value, which must be less than the `Max` property value.
`'listbox'`	The `Max` property value helps determine whether the user can select multiple items in the list box simultaneously. If `Max` – `Min` > 1, then the user can select multiple items simultaneously. Otherwise, the user cannot select multiple items simultaneously. If you set the `Max` and `Min` properties to allow multiple selections, then the `Value` property value can be a vector of indices.

`SliderStep` — Slider step size

`[0.01 0.10]` (default) | `[minorstep majorstep]`

Slider step size, specified as the array, `[minorstep majorstep]`. This property controls the magnitude of the slider value change when the user clicks the arrow buttons or the slider trough (slider channel):

- `minorstep` is the fraction of the slider range by which the `Value` property increases or decreases when the user clicks one of the arrow buttons.
- `majorstep` is the fraction of the slider range by which the `Value` property increases or decreases when the user clicks the slider trough.

When the value of `majorstep` is greater than 1, the slider fraction is no greater than 100%.

Both `minorstep` and `majorstep` must be greater than `1e-6`, and `minorstep` must be less than or equal to `majorstep`.

As `majorstep` increases, the slider thumb indicator grows longer. When `majorstep` is equal to `1`, the thumb indicator is half as long as the trough. The thumb indicator is larger for `majorstep` values greater than `1`.

Example

This slider has a range of `Max` – `Min` = `1`. The slider `Value` property changes by 1% when the user presses an arrow button. It changes by 10% when the user clicks in the trough.

```
s = uicontrol('Style','Slider','Min',0,'Max',1,'SliderStep',[0.01 0.10]);
```

`ListboxTop` — Index of top item in list box

1 (default) | integer value

Index of top item in list box, specified as an integer value. This property applies only to the listbox style of uicontrol. This property specifies which item appears in the top-most position in a list box that is not large enough to display all list entries. The `ListboxTop` value is an index into the array of you specify as the `String` property value. The `ListboxTop` value must be between `1` and the number of elements in the array. Noninteger values are fixed to the next lowest integer.

Note: The `String` and `Value` properties might override the value of the `ListboxTop` property regardless of the `ListboxTop` value you specify. The `ListboxTop` value can change depending on the value of other uicontrol properties. For example, explicitly setting the `Value` property scrolls the list to that value.

For the most reliable results, query or modify the `ListboxTop` property after MATLAB finishes drawing the uicontrol on the screen.

Example: `3`

Data Types: `double`

See Also

See Also

`uicontrol`

Topics

"Access Property Values"
"Default Property Values"

uigetdir

Open folder selection dialog box

Syntax

```
folder_name = uigetdir
folder_name = uigetdir(start_path)
folder_name = uigetdir(start_path,dialog_title)
```

Description

`folder_name = uigetdir` displays a modal dialog box showing the folders that are inside the current working directory. This dialog allows you to navigate to a folder and select it (or type the name of a folder). If the folder you specify exists, `uigetdir` returns the selected path when you click **OK**. If you click **Cancel** (or the window's close box), `uigetdir` returns `0`.

`folder_name = uigetdir(start_path)` shows the folders that are inside the folder, `start_path`. If `start_path` is empty (`''`) or is not a valid path, the dialog box opens in the current working directory.

`folder_name = uigetdir(start_path,dialog_title)` opens a dialog box with the title, `dialog_title`. The default `dialog_title` is **Select Directory to Open**.

Note: The visual characteristics of the dialog box depend on the operating system that runs your code. For instance, some operating systems do not show title bars on dialog boxes. If you pass a dialog box title to the uigetdir function, those operating systems will not display the title.

Examples

The following statement displays directories on the `C:` drive.

```
dname = uigetdir('C:\');
```

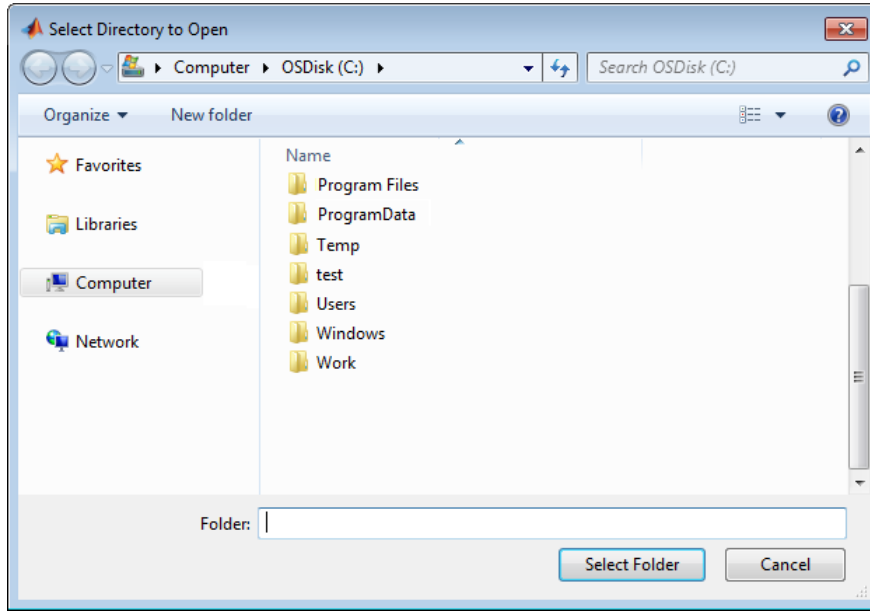

This statement uses `matlabroot` to display the MATLAB root folder in the dialog box:

```
uigetdir(matlabroot,'MATLAB Root Directory')
```

See Also

`uigetfile` | `uiputfile`

Introduced before R2006a

uigetfile

Open file selection dialog box

Syntax

```
filename = uigetfile
[FileName,PathName,FilterIndex] = uigetfile(FilterSpec)
[FileName,PathName,FilterIndex] = uigetfile(FilterSpec,DialogTitle)
[FileName,PathName,FilterIndex] =
uigetfile(FilterSpec,DialogTitle,DefaultName)
[FileName,PathName,FilterIndex] =
uigetfile(...,'MultiSelect',selectmode)
```

Description

`filename = uigetfile` displays a modal dialog box that lists files in the current folder and enables you to select or enter the name of a file. If the file name is valid (and the file exists), `uigetfile` returns the file name when you click **Open**. If you click **Cancel** (or the window's close box), `uigetfile` returns `0`.

`[FileName,PathName,FilterIndex] = uigetfile(FilterSpec)` displays only those files with extensions that match `FilterSpec`. On some platforms `uigetfile` also displays in gray the files that do not match `FilterSpec`. `FilterSpec` can be a character vector or a cell array of character vectors, and can include the `*` wildcard.

- If `FilterSpec` is a file name, that file name displays, selected in the **File name** field. The extension of the file is the default filter.
- `FilterSpec` can include a path. That path can contain `'.'`,`'..'`, \, `'/'`, or `'~'`. For example, `'../*.m'` lists all code files with a `.m` extension in the folder above the current folder.
- If `FilterSpec` is a folder name, `uigetfile` displays the contents of that folder, the **File name** field is empty, and no filter applies. To specify a folder name, make the last character of `FilterSpec` either `'\'` or `'/'`.
- If `FilterSpec` is a cell array of character vectors, it can include two columns. The first column contains a list of file extensions. The optional second column contains a

corresponding list of descriptions. These descriptions replace standard descriptions in the **Files of type** field. A description cannot be empty. The second and third examples illustrate use of a cell array as `FilterSpec`.

If `FilterSpec` is missing or empty, `uigetfile` uses the default list of file types (for example, all MATLAB files).

After you click **Open** and if the file name exists,`uigetfile` returns the name of the file in `FileName` and its path in `PathName`. If you click **Cancel** or the window's close box, the function sets `FileName` and `PathName` to `0`.

`FilterIndex` is the index of the filter selected in the dialog box. Indexing starts at 1. If you click **Cancel** or the window's close box, the function sets `FilterIndex` to `0`.

`[FileName,PathName,FilterIndex] = uigetfile(FilterSpec,DialogTitle)` displays a dialog box that has the title `DialogTitle`. To use the default file types and specify a dialog title, enter

```
uigetfile('',DialogTitle)
```

`[FileName,PathName,FilterIndex] = uigetfile(FilterSpec,DialogTitle,DefaultName)` displays a dialog box in which the file name specified by `DefaultName` appears in the **File name** field. `DefaultName` can also be a path or a path/filename. In this case, `uigetfile` opens the dialog box in the folder specified by the `path`. You can use `'.'`,`'..'`, \, or `'/'` in the `DefaultName` argument. To specify a folder name, make the last character of `DefaultName` either `'\'` or `'/'`. If the specified path does not exist, `uigetfile` opens the dialog box in the current folder.

`[FileName,PathName,FilterIndex] = uigetfile(...,'MultiSelect',selectmode)` opens the dialog box in *multiselect* mode. Valid values for *`selectmode`* are `'on'` and `'off'` (the default, which allows single selection only). If `'MultiSelect'` is `'on'` and you select more than one file in the dialog box, then `FileName` is a cell array of character vectors. Each array element contains the name of a selected file. File names in the cell array are sorted in the order your platform uses. If you select multiple files, they must be in the same folder, otherwise MATLAB displays a warning dialog box. Be aware that Microsoft Windows libraries can span multiple folders. `PathName` is a character vector identifying the folder containing the files.

If you include either of the wildcard characters, `'*'` or `'?'`, in a file name, `uigetfile` does not respond to clicking **Open**. The dialog box remains open until you cancel it or

remove the wildcard characters. This restriction applies to all platforms, even to file systems that permit these characters in file names.

Note: The visual characteristics of the dialog box depend on the operating system that runs your code. For instance, some operating systems do not show title bars on dialog boxes. If you pass a dialog box title to the uigetfile function, those operating systems will not display the title.

Examples

This dialog box lists all MATLAB code files with a `.m` extension in the current directory. `uigetfile` returns the name and path to the file you select.

```
[FileName,PathName] = uigetfile('*.m','Select the MATLAB code file');
```

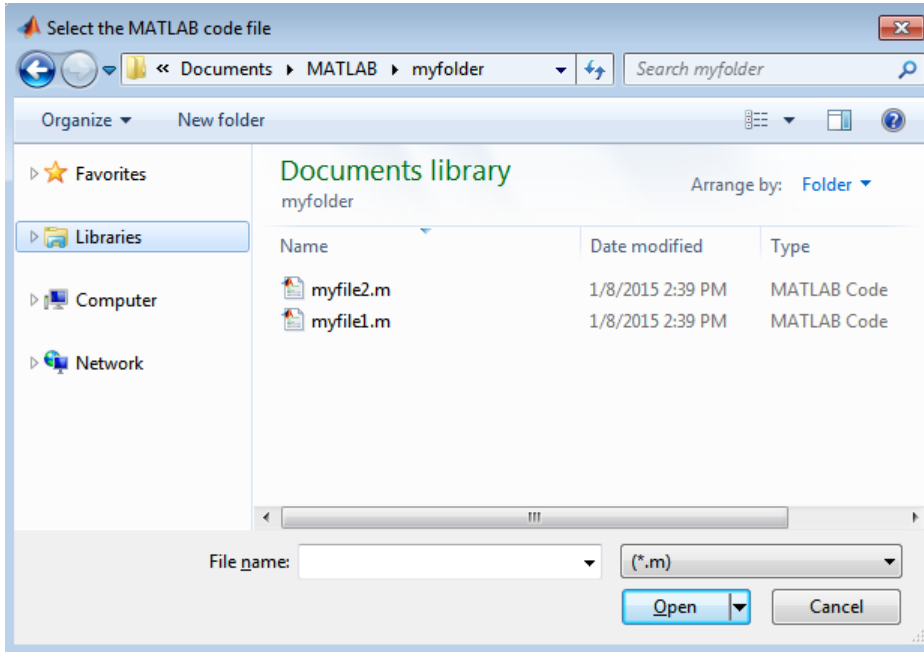

To create a list of file types that appears in the file type drop-down list, separate the file extensions with semicolons, as in the following code.

```
[filename, pathname] = ...
     uigetfile({'*.m';'*.slx';'*.mat';'*.*'},'File Selector');
```

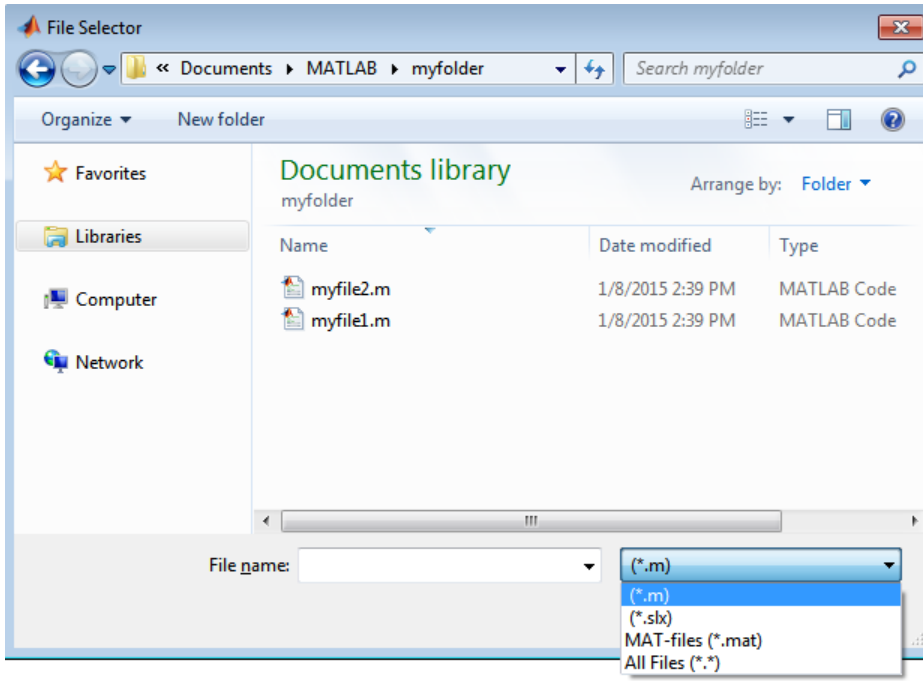

If you want to create a list of file types and give them descriptions, use a cell array, as in the following code. This example also associates multiple file types with the `'MATLAB Files'` and `'Models'` descriptions.

```
[filename, pathname] = uigetfile( ...
{'*.m;*.mlx;*.fig;*.mat;*.slx;*.mdl',...
 'MATLAB Files (*.m,*.mlx,*.fig,*.mat,*.slx,*.mdl)';
   '*.m;*.mlx',  'Code files (*.m,*.mlx)'; ...
   '*.fig','Figures (*.fig)'; ...
   '*.mat','MAT-files (*.mat)'; ...
   '*.mdl;*.slx','Models (*.slx, *.mdl)'; ...
   '*.*',  'All Files (*.*)'}, ...
   'Pick a file');
```

The first column of the cell array contains the file extensions, while the second contains your descriptions of the file types. In this example, the first entry of column one contains several extensions, separated by semicolons, which are all associated with the description `'MATLAB Files (*.m,*.mlx,*.fig,*.mat,*.slx,*.mdl)'`. The code produces the dialog box shown in the following figure.

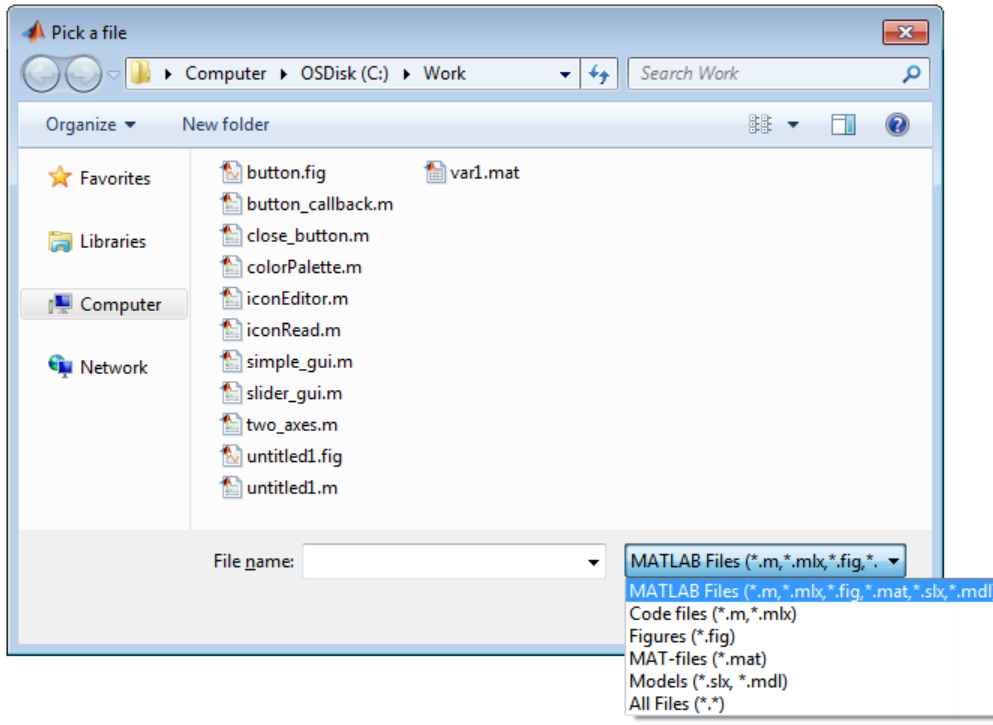

The following code lets you select a file, and then displays a message in the Command Window that summarizes the result.

```
[filename, pathname] = uigetfile('*.m', 'Select a MATLAB code file');
if isequal(filename,0)
   disp('User selected Cancel')
else
   disp(['User selected ', fullfile(pathname, filename)])
end
```

This code creates a list of file types and gives them descriptions that are different from the defaults. It also enables multiple-file selection. Select multiple files by holding down the **Shift** or **Ctrl** key and clicking on additional file names.

```
[filename, pathname, filterindex] = uigetfile( ...
{  '*.mat','MAT-files (*.mat)'; ...
   '*.slx;*.mdl','Models (*.slx, *.mdl)'; ...
   '*.*',  'All Files (*.*)'}, ...
   'Pick a file', ...
   'MultiSelect', 'on');
```

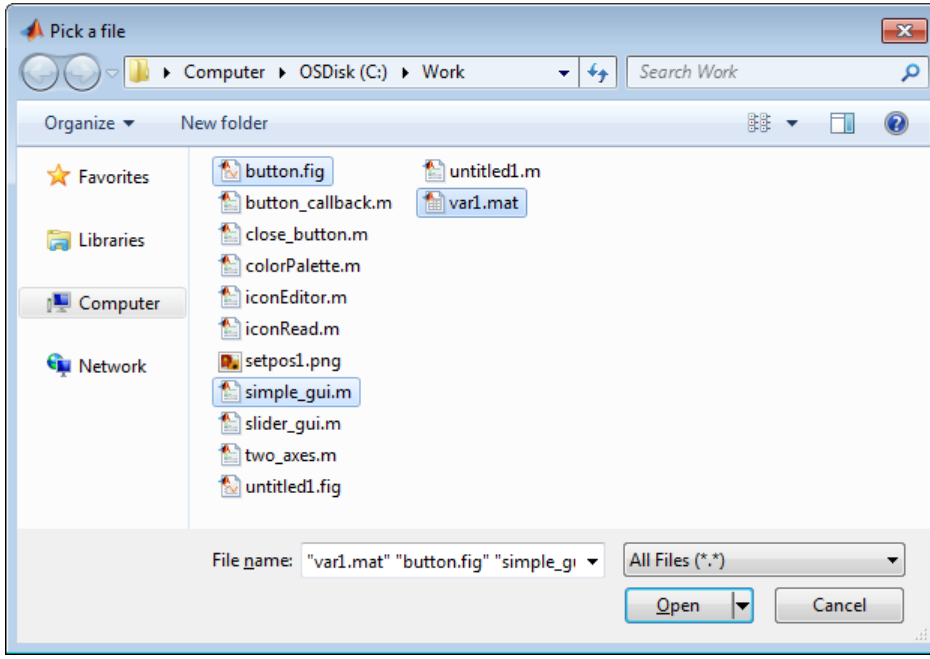

You can use the `DefaultName` argument to specify a start path and a default file name for the dialog box.

```
filename = uigetfile({'*.jpg;*.tif;*.png;*.gif','All Image Files';...
          '*.*','All Files' },'mytitle',...
          'C:\Work\setpos1.png')
```

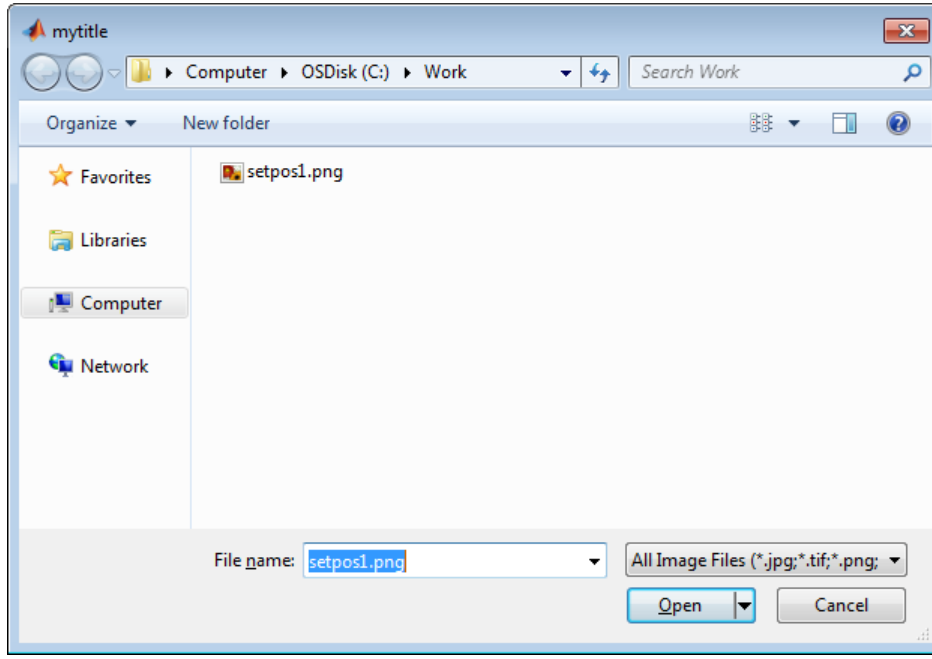

Alternatives

Use the `dir` function to return a filtered or unfiltered list of files in your current folder or a folder you specify. `dir` also can return file attributes.

See Also

`uigetdir` | `uiopen` | `uiputfile`

Introduced before R2006a

uigetpref

Conditionally open dialog box according to user preference

Syntax

```
pref_value = uigetpref(group,pref,title,question,pref_choices)
[pref_value,dlgshown] = uigetpref(...)
[...] = uigetpref(... 'Name',value)
```

Description

`pref_value = uigetpref(group,pref,title,question,pref_choices)` returns one of the items in `pref_choices` in either of two ways:

- Displays a multiple-choice dialog box that prompts you to answer a question. The dialog box includes a check box with the label **Do not show this dialog again**.
- Retrieves a previous answer from the preferences data base and returns it without displaying a dialog. No dialog is displayed if you previously selected the check box **Do not show this dialog again**.

`[pref_value,dlgshown] = uigetpref(...)` also returns in `dlgshown` whether or not the dialog displayed.

`[...] = uigetpref(... 'Name',value)` specify optional name-value pairs to control how dialogs display.

Input Arguments

`group`

Character vector specifying the name of the preference group that preference `pref` belongs to. If the group does not already exist, `uigetpref` creates it.

Default: None

pref

Character vector specifying the name of the preference that controls whether the dialog displays. If the preference does not already exist, `uigetpref` creates it.

Default: None

title

Title to display in the dialog box title bar

question

Character vector, character array, or cell array of character vectors specifying a descriptive paragraph for the dialog to display. Use `question` to define what you are asking the user to decide. Clearly state the alternatives and the consequences of choosing among them. The dialog box contains line breaks between rows of the character array, between elements of the cell array of character vectors, and between `'|'` or newline characters within a character vector.

Default: None

pref_choices

Character vector, cell array of character vectors, or `'|'`-separated character vectors specifying the labels for the dialog box push buttons. The label on the selected push button is returned.

If the internal preference values are different from the labels displayed on the push buttons, provide a 2-by-n cell array of character vectors. The first row contains the preference names, and the second row contains the associated push button labels. When `pref_choices` is not a 2-by-n cell array, MATLAB constructs lowercase versions of the button labels and returns them in `pref_value`.

Default: None

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`'CheckboxState'`

State of check box when dialog box opens:

- `false` or `0`: Check box is not initially selected.
- `true` or `1`: Check box is initially selected.

Default: `0`

`'CheckboxString'`

Character vector specifying the label for the check box.

Default: `'Do not show this dialog again'`

`'HelpString'`

Character vector specifying the label for **Help** button.

Default: No **Help** button displays.

`'HelpFcn'`

Character vector or function handle specifying the callback that executes when you click the **Help** button. Also, to have a button to trigger the callback, you must specify the `HelpString` option.

Default: `doc('uigetpref')`

`'ExtraOptions'`

Character vector or cell array of character vectors specifying labels for extra buttons. The additional buttons are not mapped to any preference settings. If you click any of these buttons, the dialog box closes and `uigetpref` returns the label text in `value`.

Default: `{}`

`'DefaultButton'`

Character vector specifying the value that `uigetpref` returns if you close the dialog box without clicking a button. This value does not have to correspond to any preference or `ExtraOption`.

Default: The first button specified in `pref_choices`

Output Arguments

`pref_value`

Character vector containing the preference corresponding to the button you press. If you cancel the dialog by clicking its close box, `uigetpref` returns the label of the first button specified in `pref_choices` or the value for `DefaultButton`, if specified. After you select the **Do not show this dialog again** check box, `uigetpref` does not display a dialog box when you call it with the same `group` and `pref` arguments. Instead, it returns the last choice you made (your registered preference) in `pref_value` immediately.

`dlgshown`

Logical value that indicates whether or not the dialog displayed. The value is `1` when the dialog displays. The value is `0` when the dialog does not display. If the user selects the **Do not show this dialog again** check box, then the dialog does not display the next time your code calls the `uigetpref` function with the same `group` and `pref` arguments.

Examples

Create a preference dialog for the `'savefigurebeforeclosing'` preference in the `'mygraphics'` group of preferences.

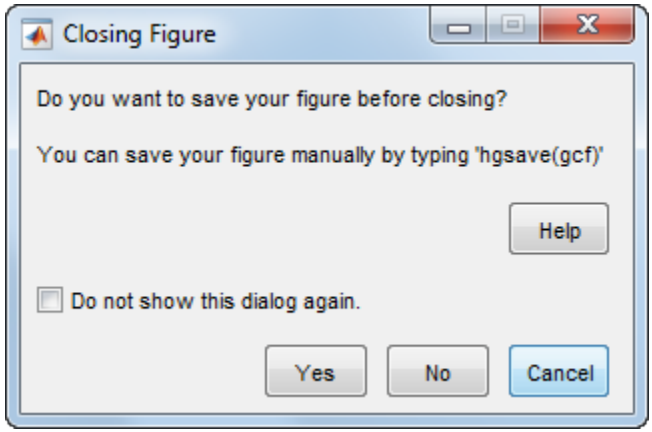

This function, `save_figure_perhaps`, displays a dialog that asks the user to save current figure. The function responds appropriately, depending on the value returned by `uigetpref`.

```
function save_figure_perhaps
% Closes figure conditionally, asking whether to save it first.
% User can suppress the dialog from UIGETPREF permanently by selecting
% "Do not show this dialog again".

fig = gcf;
[selectedButton dlgshown] = uigetpref(...
    'mygraphics',...                        % Group
    'savefigurebeforeclosing',...           % Preference
    'Closing Figure',...                    % Window title
    {'Do you want to save your figure before closing?'
     ''
     'You can save your figure manually by typing ''hgsave(gcf)'''},...
    {'always','never';'Yes','No'},...        % Values and button labels
     'ExtraOptions','Cancel',...             % Additional button
     'DefaultButton','Cancel',...            % Default choice
     'HelpString','Help',...                 % Label for Help button
     'HelpFcn','doc(''closereq'');');        % Callback for Help button
switch selectedButton
    case 'always'  % Open a Save dialog (without testing if saved before)
    [fileName,pathName,filterIndex] = uiputfile('fig', ...
                                   'Save current figure', ...
                                   'untitled.fig');
       if filterIndex == 0     % User cancelled save or named no file
           delete(fig);
       else                    % Use filename returned from UIPUTFILE
           saveas(fig,[pathName fileName])
           delete(fig);
       end
   case 'never'                % Close the figure without saving it
       delete(fig);
   case 'cancel'               % Do not close the figure
       return
 end
```

To run this example, copy and paste the code into a new program file. Name the file `save_figure_perhaps.m` and save it on your search path. To use the function as a `CloseRequestFcn` callback, create a figure as follows:

```
figure('CloseRequestFcn','save_figure_perhaps');
```

Clicking the figure's close box displays the dialog box until you select **Do not show this dialog again**.

Tutorials

- "Confirmation Dialog Boxes Preferences"

Definitions

Preferences

Preferences provide the ability to specify how applications behave and how users interact with them. For example, you can set a preference for which products display their documentation in the Help browser, or which messages the Code Analyzer displays. In MathWorks software products, preferences persist across sessions and are stored in a preference data base, the location of which is system-dependent. Use the **Preferences** option on the **File** menu to access all built-in preferences.

`uigetpref` uses the same preference data base as `addpref`, `getpref`, `ispref`, `rmpref`, and `setpref`. However, `uigetpref` registers the preferences it sets as a separate list, so that it and `uisetpref` can manage those preferences.

To modify preferences registered with `uigetpref`, you can use `setpref` and `uisetpref` to explicitly change preference values to `'ask'`. If you specify a preference that does not already exist in the preference data base, `uigetpref` creates it.

Tips

- You must supply all input arguments up to and including `pref_choices`.
- `uigetpref` creates specified groups and preferences, if they do not currently exist. To delete a preference group you no longer need, use `rmpref`.
- The value returned in `pref_value` is a preference name (as specified in `pref`), not its button label (as specified in `pref_choices`).
- After you select the check box **Do not show this dialog again** and close the dialog box, the dialog box does not display again for the same preference. To reenable dialogs that are being suppressed by preferences, use the command:

  ```
  uisetpref('clearall')
  ```

  Executing `uisetpref` with this command re-enables *all* preference dialogs you have defined with `uigetpref`, not just the most recent one.

See Also

`ispref` | `addpref` | `getpref` | `setpref` | `prefdir` | `uisetpref` | `rmpref`

Topics

"Confirmation Dialog Boxes Preferences"

Introduced before R2006a

uiimport

Import data interactively

Syntax

```
uiimport
uiimport(filename)
uiimport('-file')
uiimport('-pastespecial')
S = uiimport( ___ )
```

Description

`uiimport` opens a dialog to interactively load data from a file or the clipboard. MATLAB displays a preview of the data in the file.

`uiimport(filename)` opens the file specified in `filename`.

`uiimport('-file')` presents the file selection dialog first.

`uiimport('-pastespecial')` presents the clipboard contents first.

`S = uiimport( ___ )` stores the resulting variables as fields in the struct `S`.

See Also

`load` | `importdata` | `clipboard`

Topics

"Supported File Formats for Import and Export"

Introduced before R2006a

uimenu

Create menus and menu items on figure windows

Syntax

```
m = uimenu
m = uimenu(Name,Value,...)
m = uimenu(parent)
m = uimenu(parent,Name,Value,...)
```

Description

`m = uimenu` creates a uimenu in an existing figure's menu bar and returns the uimenu object, `m`. If there is no figure available, then MATLAB creates a new figure to serve as the parent.

`m = uimenu(Name,Value,...)` creates a uimenu and specifies one or more uimenu property names and corresponding values. Use this syntax to override the default uimenu properties.

`m = uimenu(parent)` creates a uimenu and designates a specific parent object. The `parent` argument can be a figure, uicontextmenu, or another uimenu object. Setting the parent to a uicontextmenu or another uimenu makes `m` a submenu of the parent menu.

`m = uimenu(parent,Name,Value,...)` creates a uimenu with a specific parent and one or more uimenu properties.

Examples

This example creates a menu labeled **Workspace** with menu options for creating a new figure window, saving workspace variables, and exiting MATLAB. In addition, it defines an accelerator key for the Quit option.

```
f = uimenu('Label','Workspace');
    uimenu(f,'Label','New Figure','Callback','disp(''figure'')');
```

```
uimenu(f,'Label','Save','Callback','disp(''save'')');
uimenu(f,'Label','Quit','Callback','disp(''exit'')',...
       'Separator','on','Accelerator','Q');
```

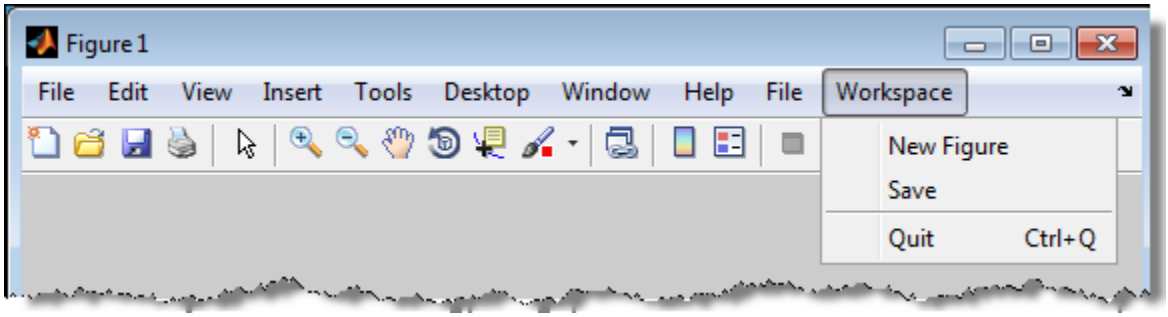

This example creates a new figure with a menu bar that excludes the built-in menus. It creates a **Find** menu with options **Find & Replace**, and **Variable**. For the Variable option, it creates a submenu with options of **Name** and **Value**.

```
f = figure('MenuBar','None');
mh = uimenu(f,'Label','Find');
frh = uimenu(mh,'Label','Find and Replace ...',...
            'Callback','disp(''goto'')');
frh = uimenu(mh,'Label','Variable');
uimenu(frh,'Label','Name...', ...
          'Callback','disp(''variable'')');

uimenu(frh,'Label','Value...', ...
          'Callback','disp(''value'')');
```

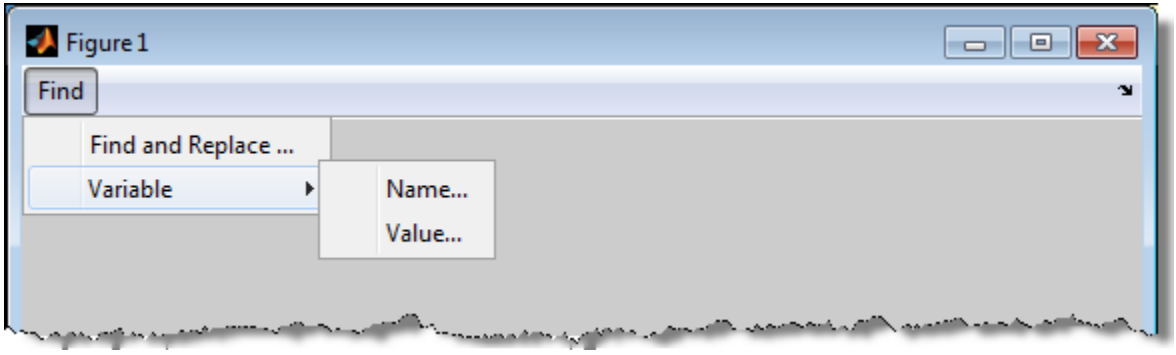

This example creates a context menu, **Font**, on a figure with menu options **Helvetica** and **Monospace**. When you run the code and then right-click anywhere within the figure window, the context menu displays.

```
f = figure;
% Create the UICONTEXTMENU
cmenu = uicontextmenu;

% Create the parent menu
fontmenu = uimenu(cmenu,'label','Font');

% Create the submenus
font1 = uimenu(fontmenu,'label','Helvetica',...
               'Callback','disp(''HelvFont'')');
font2 = uimenu(fontmenu,'label',...
               'Monospace','Callback','disp(''MonoFont'')');
f.UIContextMenu = cmenu;
```

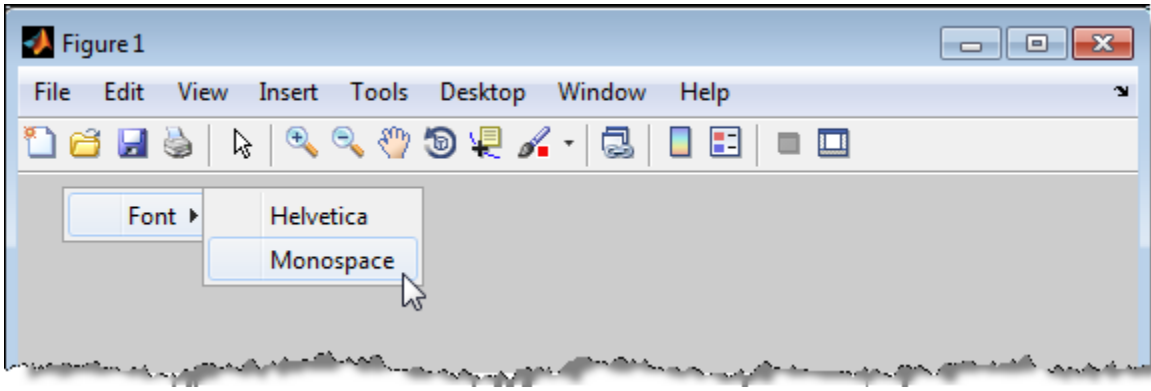

Tips

If you want the uimenu to respond when the user activates the uimenu, set its Callback property. Uimenus respond to different actions, depending on their location:

- Top level (in the menu bar) — Responds to a single mouse click
- Submenu that contains other submenus — Responds to hovering the mouse
- Terminating submenu — Responds to a single mouse click

The value of the figure's MenuBar property determines the content in the menu bar. When the `MenuBar` property is set to `'figure'`, a default set of menus appear alongside the uimenus defined in your code. When the `MenuBar` property is set to `'none'`, the default menus do not appear, but the uimenus you create appear in the menu bar.

Uimenus do not appear in figures whose WindowStyle property is set to `'Modal'`. If a figure containing uimenu children is changed to `'Modal'`, the uimenu children still exist in the Children property of the figure. However, the uimenus do not display while `WindowStyle` is set to `'Modal'`.

See Also

See Also

`figure` | `uicontextmenu` | Uimenu Properties

Topics

"Create Menus for Programmatic Apps"
"Create Menus for GUIDE Apps"
"Access Property Values"

Introduced before R2006a

Uimenu Properties

Control appearance and behavior of menu

Description

A uimenu is a menu in a figure's menu bar. The `uimenu` function adds a menu to a figure or adds a submenu to an existing menu and sets any required properties. By changing uimenu property values, you can modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
m = uimenu;
color = m.ForegroundColor;
m.ForegroundColor = [0 0 1];
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Visible` — Uimenu visibility
`'on'` (default) | `'off'`

Uimenu visibility, specified as `'on'` or `'off'`. When the `Visible` property is set to `'off'`, the uimenu is not visible, but you can query and set its properties.

`Label` — Menu label
character vector

Menu label, specified as a character vector. This property specifies the label that appears on the menu (or menu item).

You can specify a mnemonic for the label using the ampersand (&) character. The character that follows the ampersand appears underlined in the menu. The user can select the menu item by pressing the **Alt** key followed by the underlined character.

In order for the mnemonic system to work, you must specify a mnemonic for all menu items you define in the UI.

If you want to display an ampersand in the menu label, specify two consecutive ampersands.

Here are some examples:

Label Value	Resulting Menu Label
`'&Open Selection'`	**Open Selection** (pressing **Alt** underlines O)
`'O&pen Selection'`	**Open Selection** (pressing **Alt** underlines p)
`'&Save && Go'`	**Save & Go** (pressing **Alt** underlines S)
`'Save& Go'`	**Save& Go** (space cannot be a mnemonic character)

Note: Avoid using these case-sensitive reserved words: “default”, “remove”, and “factory”. If you must use a reserved word, then escape that word by preceding it with a back-slash character. For instance, `'\default'` escapes “default”.

Example: `'Open Selection'`

Example: `'&Open Selection'`

Data Types: `char`

`Checked` — Menu check indicator

`'off'` (default) | `'on'`

Menu check indicator, specified as `'off'` or `'on'`. Setting this property to `'on'` places a check mark next to the corresponding menu item. Setting it to `'off'` removes the check mark. You can use this feature to show the state of menu items that enable or disable functionality in your application.

Note: The `Checked` property is ignored when the menu item is:

- A top-level menu item
- A menu item that contains one or more child menu items

`Separator` — Separator line mode

`'off'` (default) | `'on'`

Separator line mode, specified as `'off'` or `'on'`. Setting this property to `'on'` draws a dividing line above the uimenu.

`ForegroundColor` — Uimenu text color

`[0 0 0]` (default) | RGB triplet | short name | long name

Uimenu text color, specified as an RGB triplet, short name, or long name from the table below.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

Data Types: `double` | `char`

Location and Size

`Position` — Relative menu position

scalar integer value

Relative menu position, specified as a scalar integer value. The value of `Position` property indicates placement on the menu bar or within a menu. Top-level menus appear from left to right on the menu bar according to the value of their `Position` property, with 1 representing the left-most position. The individual items within a given menu

appear from top to bottom according to the value of their `Position` property, with `1` representing the top-most position.

Data Types: `double`

Interactive Control

`Callback` — Callback function that executes when user selects the uimenu

`''` (default) | function handle | cell array | character vector

Callback function that executes when user selects the uimenu, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Note: Do not use a uimenu callback to dynamically change menu items. Deleting, adding, and replacing menu items in a callback can result in a blank menu on some platforms. You can hide, show, and disable menu items in a callback to achieve the same effect. To fully repopulate menu items, delete and create them outside the callback.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

Data Types: `function_handle` | `cell`

`Enable` — Operational state of uimenu

`'on'` (default) | `'off'`

Operational state of uimenu, specified as `'on'` or `'off'`. This property controls whether the user can select a menu item. When the value is `'off'`, the menu label appears dimmed, indicating that the user cannot select it.

`Accelerator` — Keyboard equivalent

character

Keyboard equivalent, specified as a character. This property defines a keyboard equivalent character for selecting the menu item. Specifying an `Accelerator` value allows users to select the menu item by pressing a character and another key, instead of selecting the menu item with the mouse. The key sequence is platform specific:

- For Windows, the sequence is **Ctrl**+`Accelerator`.
- For Macintosh systems, the sequence is **Command**+`Accelerator`.
- For Linux systems, the sequence is **Ctrl**+`Accelerator`.

Accelerator keys work even when the parent menu is collapsed. However, some restrictions apply:

- You can define the `Accelerator` property for only menu items that do not have submenus menus.
- Accelerators work only for menu items that execute a callback function.
- Accelerators work only when the `Visible` property of the menu item is set to `'on'`.
- The figure must be in focus when entering the accelerator key sequence.

To remove an `Accelerator` value, set the `Accelerator` property to `''`.

Example: `'f'`

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the

`BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

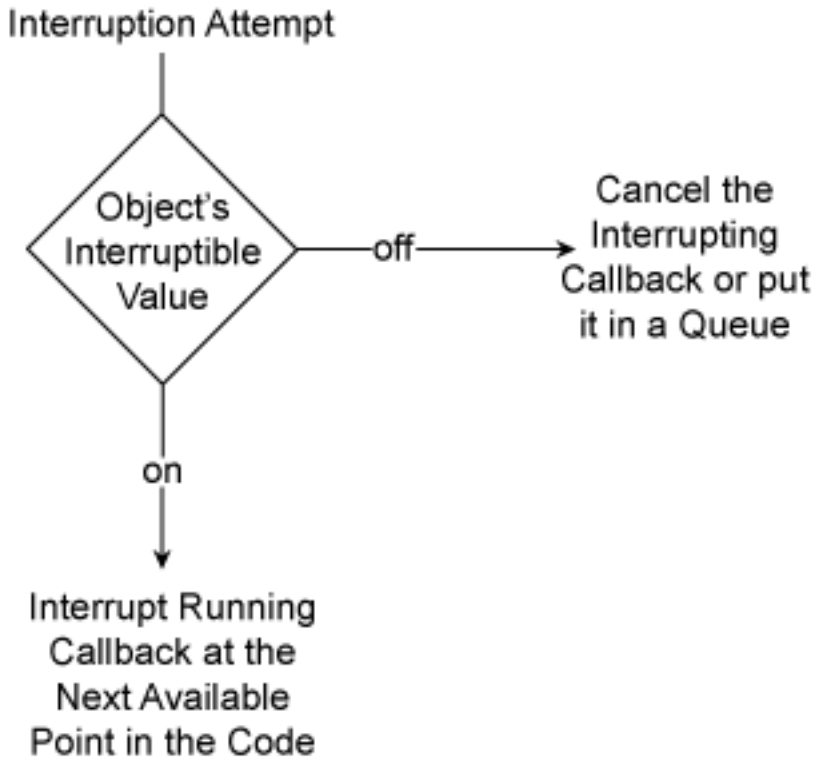

If a uimenu callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.

- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See "Interrupt Callback Execution" for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.

- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

`HitTest` — Ability to become current object

`'on'` (default) | `'off'`

This property has no effect on the uimenu.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uimenu creation function

function handle | cell array | character vector

Uimenu creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.

- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uimenu. MATLAB initializes all uimenu property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uimenu that is being created.

Setting the `CreateFcn` property on an existing uimenu has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uimenu object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uimenu deletion function

function handle | cell array | character vector

Uimenu deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uimenu (for example, when the end user deletes the figure). MATLAB executes the `DeleteFcn` callback before destroying the properties of the uimenu. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uimenu that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uimenu'`

This property is read-only.

Type of graphics object, returned as `'uimenu'`.

`Tag` — Uimenu identifier

`''` (default) | character vector

Uimenu identifier, specified as a character vector. This value to serves as an identifier for the uimenu. When you need access to the uimenu elsewhere in your code, you can use the `findobj` function to search for the uimenu based on the `Tag` value.

Example: `'menu1'`

Data Types: `char`

`UserData` — Data to associate with the uimenu object

empty array (default) | array

Data to associate with the uimenu object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See "Share Data Among Callbacks" for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Uimenu parent

figure | uicontextmenu | uimenu

This property is read-only.

Uimenu parent, specified as a figure, uicontextmenu, or another uimenu object. You can move a uimenu to a different figure, or move it under a different uimenu by setting this property to the target figure, uicontextmenu, or uimenu object.

`Children` — Children of uimenu

empty `GraphicsPlaceholder` array (default) | 1-D array of uimenu objects

Children of uimenu, returned as an empty `GraphicsPlaceholder` or a 1-D array of uimenu objects. The children of uimenus are other uimenus that function as submenus.

You cannot add or remove children using the `Children` property of the uimenu. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the order of the displayed menu items.

To add a child to this list, set the `Parent` property of the child component to be the uimenu object.

Objects with the `HandleVisibility` property set to `'off'` do not list in the `Children` property. For more information, see the `HandleVisibility` property description.

`HandleVisibility` — Visibility of Uimenu handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uimenu handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uimenu handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties. These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object's handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uimenu handle is always visible.
`'callback'`	The uimenu handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uimenu at the command-line, but allows callback functions to access it.

HandleVisibility Value	Description
`'off'`	The uimenu handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

See Also

See Also

`uimenu`

Topics

"Default Property Values"

uint8

Convert to 8-bit unsigned integer

Syntax

```
intArray = uint8(array)
```

Description

`intArray = uint8(array)` converts the elements of an array into unsigned 8-bit (1-byte) integers of class `uint8`.

Input Arguments

array

Array of any numeric class, such as `single` or `double`. If `array` is already of class `uint8`, the `uint8` function has no effect.

Output Arguments

intArray

Array of class `uint8`. Values range from 0 to $2^8 - 1$.

The `uint8` function maps any values in `array` that are outside the limit to the nearest endpoint. For example,

```
uint8(2^8)   %  2^8 = 256
```

returns

```
ans =
    255
```

Examples

Convert a `double` array to `uint8`:

```
mydata = uint8(magic(10));
```

Tutorials

- "Integers"
- "Arithmetic Operations on Integer Classes"

Alternatives

When preallocating integer arrays, specify the class in the call to functions that support a class name input (such as `zeros`, `ones` or `eye`), rather than calling an integer conversion function. For example,

```
I = uint8(zeros(100));     % Creates an intermediate array
```

is not as efficient as

```
I = zeros(100, 'uint8');   % Preferred
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`double` | `single` | `uint16` | `uint32` | `uint64` | `int8` | `int16` | `int32` | `int64` | `intmax` | `intmin`

Topics

"Integers"
"Arithmetic Operations on Integer Classes"

Introduced before R2006a

uint16

Convert to 16-bit unsigned integer

Syntax

```
intArray = uint16(array)
```

Description

`intArray = uint16(array)` converts the elements of an array into unsigned 16-bit (2-byte) integers of class `uint16`.

Input Arguments

array

Array of any numeric class, such as `single` or `double`. If `array` is already of class `uint16`, the `uint16` function has no effect.

Output Arguments

intArray

Array of class `uint16`. Values range from 0 to $2^{16} - 1$.

The `uint16` function maps any values in `array` that are outside the limit to the nearest endpoint. For example,

```
uint16(2^16)   %  2^16 = 65536
```

returns

```
ans =
    65535
```

Examples

Convert a `double` array to `uint16`:

```
mydata = uint16(magic(100));
```

Tutorials

- "Integers"
- "Arithmetic Operations on Integer Classes"

Alternatives

When preallocating integer arrays, specify the class in the call to functions that support a class name input (such as `zeros`, `ones` or `eye`), rather than calling an integer conversion function. For example,

```
I = uint16(zeros(100));     % Creates an intermediate array
```

is not as efficient as

```
I = zeros(100, 'uint16');   % Preferred
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`double` | `single` | `uint8` | `uint32` | `uint64` | `int8` | `int16` | `int32` | `int64` | `intmax` | `intmin`

Topics

"Integers"
"Arithmetic Operations on Integer Classes"

Introduced before R2006a

uint32

Convert to 32-bit unsigned integer

Syntax

```
intArray = uint32(array)
```

Description

`intArray = uint32(array)` converts the elements of an array into unsigned 32-bit (4-byte) integers of class `uint32`.

Input Arguments

array

Array of any numeric class, such as `single` or `double`. If `array` is already of class `uint32`, the `uint32` function has no effect.

Output Arguments

intArray

Array of class `uint32`. Values range from 0 to $2^{32} - 1$.

The `uint32` function maps any values in `array` that are outside the limit to the nearest endpoint. For example,

```
uint32(2^32)    % 2^32 = 4294967296
```

returns

```
ans =
    4294967295
```

Examples

Convert a `double` array to `uint32`:

```
mydata = uint32(magic(1000));
```

Tutorials

- "Integers"
- "Arithmetic Operations on Integer Classes"

Alternatives

When preallocating integer arrays, specify the class in the call to functions that support a class name input (such as `zeros`, `ones` or `eye`), rather than calling an integer conversion function. For example,

```
I = uint32(zeros(100));     % Creates an intermediate array
```

is not as efficient as

```
I = zeros(100, 'uint32');   % Preferred
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`double` | `single` | `uint8` | `uint16` | `uint64` | `int8` | `int16` | `int32` | `int64` | `intmax` | `intmin`

Topics

"Integers"
"Arithmetic Operations on Integer Classes"

Introduced before R2006a

uint64

Convert to 64-bit unsigned integer

Syntax

```
intArray = uint64(array)
```

Description

`intArray = uint64(array)` converts the elements of an array into unsigned 64-bit (8-byte) integers of class `uint64`.

Input Arguments

array

Array of any numeric class, such as `single` or `double`. If `array` is already of class `uint64`, the `uint64` function has no effect.

Output Arguments

intArray

Array of class `uint64`. Values range from 0 to $2^{64} - 1$.

The `uint64` function maps any values in `array` that are outside the limit to the nearest endpoint. For example,

```
uint64(2^64)    % 2^64 = 18446744073709551616
```

returns

```
ans =
```

```
18446744073709551615
```

Examples

Convert a literal value to `uint64`:

```
x = uint64(9007199254740993);
```

Tutorials

- "Integers"
- "Arithmetic Operations on Integer Classes"

Tips

Double-precision floating-point numbers have only 52 bits in the mantissa. Therefore, `double` values cannot represent all integers greater than 2^{53} correctly. Before performing arithmetic operations on values larger than 2^{53} in magnitude, convert the values to 64-bit integers. For example,

```
x = uint64(2^53+1);    % Floating-point arithmetic, loses precision
```

is not as accurate as the 64-bit integer arithmetic operation:

```
x = uint64(2^53) + 1;  % Preferred
```

Alternatives

When preallocating integer arrays, specify the class in the call to functions that support a class name input (such as `zeros`, `ones` or `eye`), rather than calling an integer conversion function. For example,

```
I = uint64(zeros(100));     % Creates an intermediate array
```

is not as efficient as

```
I = zeros(100, 'uint64');   % Preferred
```

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

`double` | `single` | `uint8` | `uint16` | `uint32` | `int8` | `int16` | `int32` | `int64` | `intmax` | `intmin`

Topics

“Integers”
“Arithmetic Operations on Integer Classes”

Introduced before R2006a

uiopen

Open dialog box for selecting files to load into workspace

Syntax

```
uiopen
uiopen(type)
uiopen(filename)
uiopen(filename, TF)
```

Description

`uiopen` displays the dialog box with the file filter set to all MATLAB files (with file extensions `*.m`, `*.mlx`, `*.mat`, `*.fig`, `*.mdl`, and `*.slx`).

`uiopen(type)` sets the file filter according to the `type`.

`uiopen(filename)` displays `filename` as the default value for **File name** in the dialog box and lists only files having the same extension.

`uiopen(filename, TF)` directly opens file `filename` without displaying a dialog box if `TF` is true, and displays the dialog box if `TF` is false.

Note: The visual characteristics of the dialog box depend on the operating system that runs your code. For instance, some operating systems do not show title bars on dialog boxes.

Input Arguments

`type`

Character vector that specifies the kind of file to show in the dialog box (the file filter). Acceptable values for `type` are the following.

Type Value	Files Displayed
`'matlab'`	All MATLAB files (with file extensions `*.m`, `*.mlx`, `*.mat`, `*.fig`, `*.mdl`, and `*.slx`.)
`'load'`	All MAT-files `(*.mat)`
`'figure'`	All figure files `(*.fig)`
`'simulink'`	All Simulink model files (`*.mdl` and `*.slx`)
`'editor'`	All MATLAB files except for `.mat`, `.fig`, and `.slx` files.

`filename`

The name of the file to open, specified as a character vector that includes the file extension. The filename can be a wildcard character plus extension. For example, `*.txt` displays a list of all files with the file extension `.txt`.

`TF`

A MATLAB expression that evaluates to `true` or `false`. If `true`, `filename` opens directly, without displaying the dialog.

Examples

Filter to display only FIG-files by setting the **Files of type** field to `Figures (*.fig)`:

```
uiopen('figure')
```

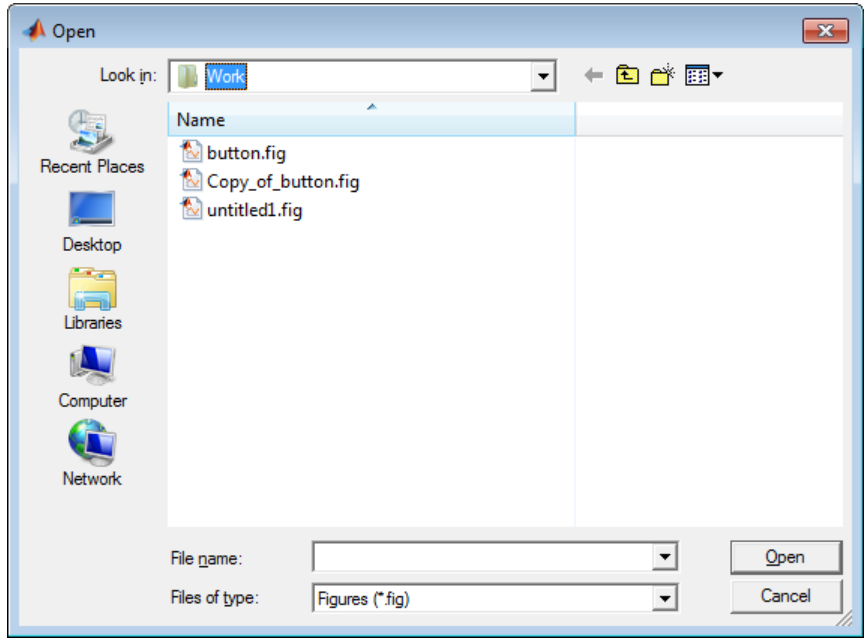

Definitions

Modal Dialog

A modal dialog box prevents the user from interacting with other windows before responding. For more information, see `WindowStyle` in the MATLAB Figure Properties.

Tips

When you select a file and click **open**, `uiopen` does the following:

- Gets the file using `uigetfile`.
- Opens the file using the `open` command.
  - Files with a file extension of `.m` and `.mlx` open in the Editor.

  - Variables stored in files with a file extension of `.mat` appear in the caller's workspace.
  - Files with a file extension of `.fig` open as figure windows.
  - Files with a file extension of `.mdl` or `.slx` open as models in Simulink.
- `uiopen('load')` is the only the form of `uiopen` that you can compile into a standalone application. You can create a file selection dialog box that you can compile using `uigetfile`.
- The `uiopen` dialog box is modal. A modal dialog box prevents you from interacting with other windows until you respond to the modal one.
- `uiopen` displays the same dialog box that opens when you use the MATLAB desktop toolstrip to open a file. (On the **Home** tab, in the **File** section, click **Open** .)

Alternatives

In MATLAB code or in a command:

- To open a file appropriately based on its file extension, use the `open` function.
- To open a file in the Editor, use the `edit` function.
- To open a MAT-file and load its contents into the workspace, use the `load` function.
- To open a FIG-file, use the `openfig` function.
- To open a file in an application in Microsoft Windows, use the `winopen` function.

See Also

`uigetfile` | `uiputfile` | `uisave`

Introduced before R2006a

uipanel

Create panel container object

Syntax

```
p = uipanel
p = uipanel(Name,Value)
p = uipanel(parent)
p = uipanel(parent,Name,Value)
```

Description

`p = uipanel` creates a panel in an existing "traditional figure" on page 1-11934 and returns the panel object. If there is no figure available, then MATLAB creates a new traditional figure to serve as the parent. Panels are containers that group UI components together, including other panels. Panels cannot contain ActiveX controls.

`p = uipanel(Name,Value)` specifies one or more panel property names and corresponding values. Use this syntax to override the default panel properties.

`p = uipanel(parent)` creates a panel and designates a specific parent object. The `parent` argument can be a traditional figure, "UI figure" on page 1-11934, tab, button group or another panel object.

`p = uipanel(parent,Name,Value)` specifies panel property values using one or more `Name,Value` pair arguments.

Examples

Create Panel With Children in a Traditional Figure

Create a traditional figure containing two panels and a push button. The panels use the default `Units` property value, `'normalized'`. The default units for the `uicontrol` is `'pixels'`

```
h = figure;
hp = uipanel('Title','Main Panel','FontSize',12,...
```

```
             'BackgroundColor','white',...
             'Position',[.25 .1 .67 .67]);
hsp = uipanel('Parent',hp,'Title','Subpanel','FontSize',12,...
              'Position',[.4 .1 .5 .5]);
hbsp = uicontrol('Parent',hsp,'String','Push here',...
               'Position',[18 18 72 36]);
```

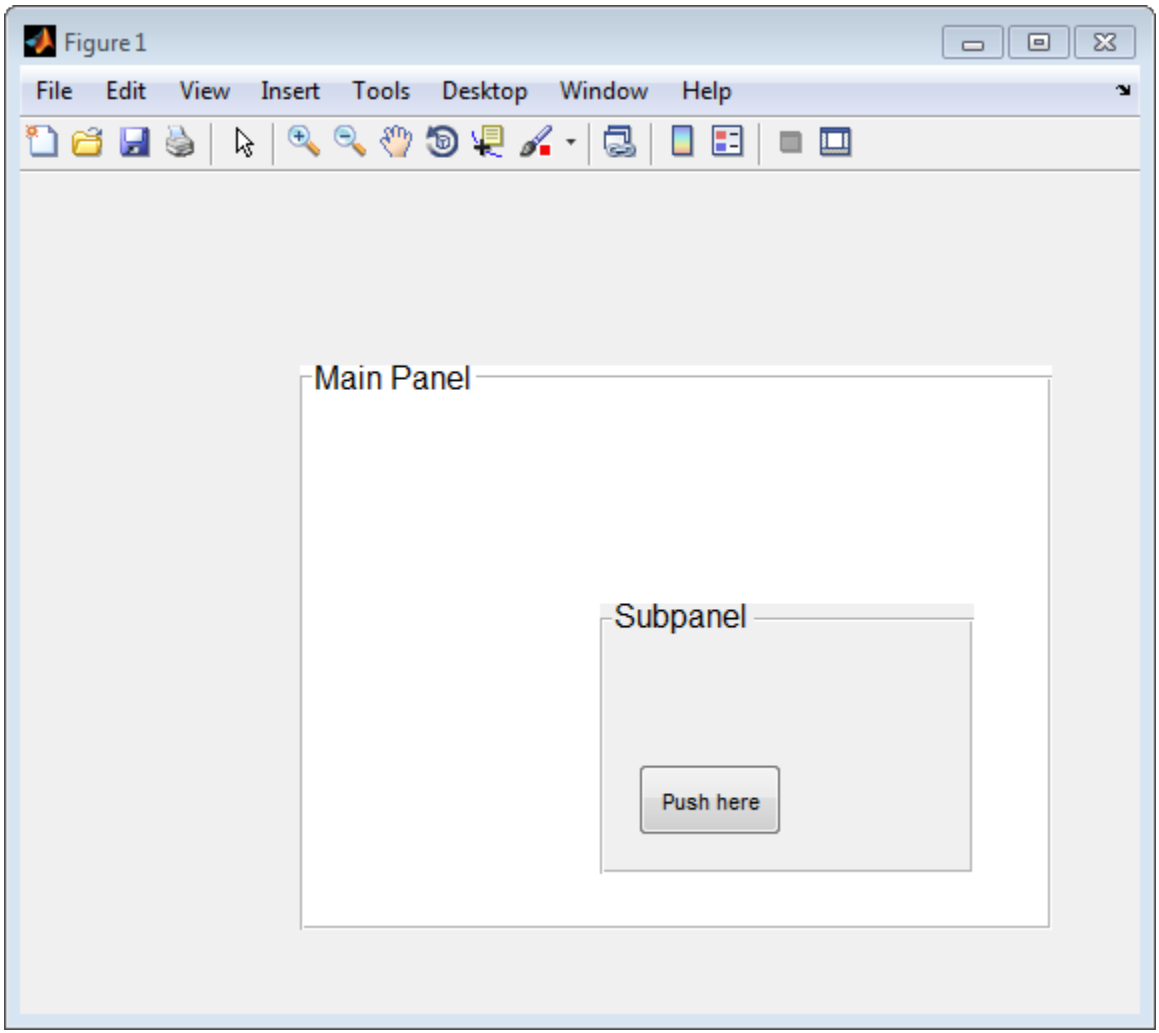

Create Panel With Children in UI Figure

Create a UI figure containing two panels and a button. The panels and button position measurements are in `'pixels'`.

```
fig = uifigure;
pnl = uipanel(fig,'Title','Main Panel','FontSize',12,...
```

```
                 'BackgroundColor','white',...
                 'Position',[20 20 440 321]);
subpnl = uipanel(pnl,'Title','Subpanel','FontSize',12,...
                 'Position',[20 20 170 200]);
btn = uibutton(subpnl,'Text','Push here',...
                'Position', [20 20 75 36]);
```

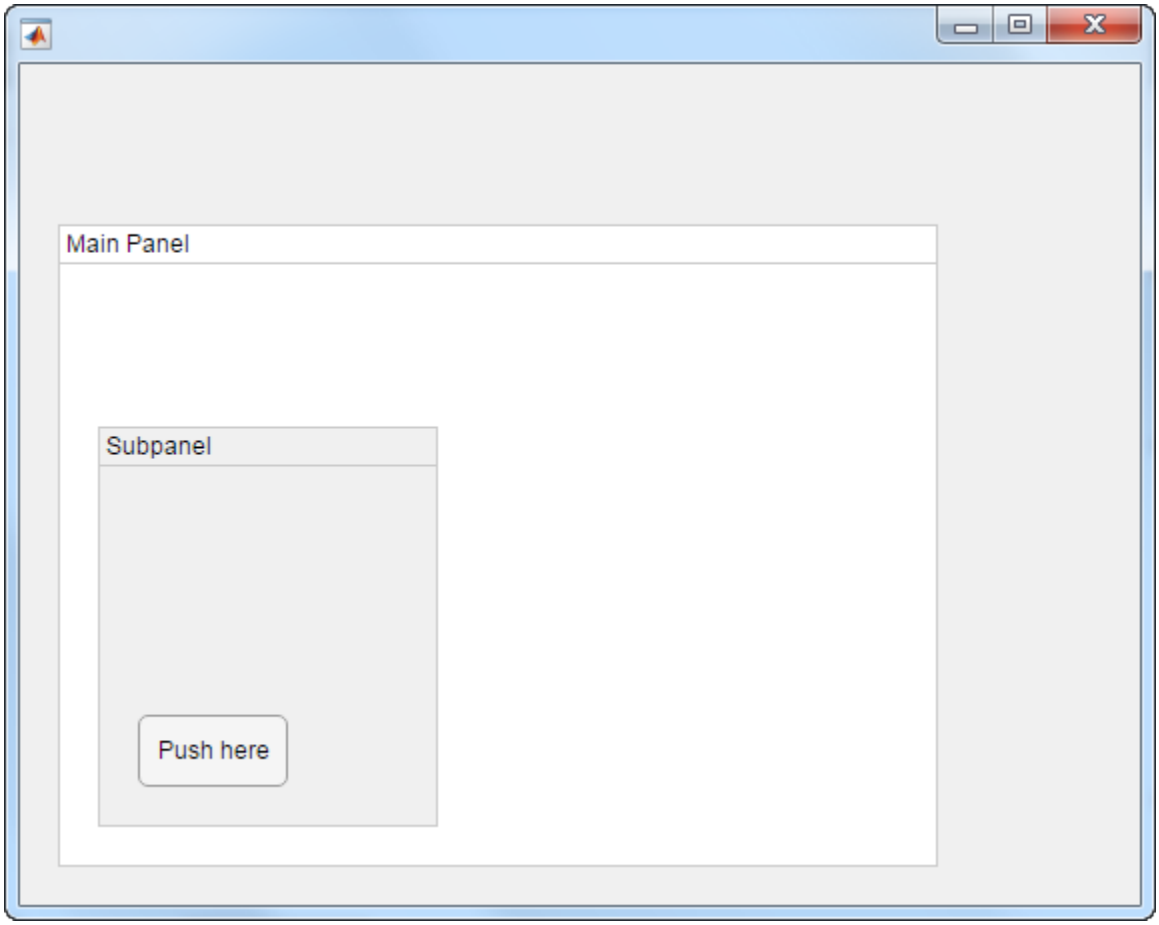

Input Arguments

`parent` — Parent object of panel

figure object (default) | tab object | panel object | button group object

Parent object of panel, specified as a figure, panel, tab, or button group object. If you do not specify a parent object, the default parent is a traditional figure object.

Example:

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Title','Options'` specifies that the panel title is `Options`.

- Name-Value pair arguments you can use with panels in traditional figure windows, see Uipanel Properties.
- Name-Value pair arguments you can use with panels in UI figure windows, see Panel Properties

Definitions

traditional figure

A traditional figure is one that MATLAB creates when you use GUIDE or the `figure` function. For more information on the difference between traditional figures and UI figures, see “Graphics Support in App Designer”.

UI figure

A UI figure is one that MATLAB creates when you use App Designer or the `uifigure` function. For more information on the difference between traditional figures and UI figures, see “Graphics Support in App Designer”.

Tips

If you set the `Visible` property of a panel object to `'off'`, then any child objects it contains (buttons, button groups, axes, etc.) become invisible along with the parent panel. However, the `Visible` *property value* of each child object remains unaffected.

See Also

See Also

Functions

`appdesigner` | `figure` | `uifigure`

Properties

Panel Properties | Uipanel Properties

Introduced before R2006a

Uipanel Properties

Control appearance and behavior of panel

Description

Uipanels are containers for grouping together graphics objects or UI components. The `uipanel` function creates a panel in a figure and sets any required properties before displaying it. By changing the uipanel property values, you can modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
p = uipanel;
pos = p.Position;
p.Position = [.1 .1 .7 .8];
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Visible` — Uipanel visibility

`'on'` (default) | `'off'`

Uipanel visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the uipanel displays on the screen. If the `Visible` property of a uipanel is set to `'off'`, the entire uipanel is invisible, but you can still specify and access its properties.

Changing the size of an invisible uipanel triggers the `SizeChangedFcn` callback when the uipanel becomes visible.

Note Changing the `Visible` property of a uipanel does *not* change the `Visible` property of its child components even though hiding the uipanel prevents its children from displaying.

`BackgroundColor` — Uipanel background color

`[.94 .94 .94]` (default) | RGB triplet | short name | long name

Uipanel background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the uipanel.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Data Types: `double` | `char`

`ForegroundColor` — Uipanel title color
`[0 0 0]` (default) | RGB triplet | short name | long name

Uipanel title color, specified as an RGB triplet, short name, or long name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`

Long Name	Short Name	RGB Triplet
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0 0 1]

Example: 'b'

Example: 'blue'

BorderType — Border of the uipanel

'etchedin' (default) | 'etchedout' | 'beveledin' | 'beveledout' | 'line' | 'none'

Border of the uipanel area, specified as 'etchedin', 'none', 'etchedout', 'beveledin', 'beveledout', or 'line'.

- For a 3-D look, use etched or beveled borders.

  Use the HighlightColor and ShadowColor properties to specify the color of 3-D borders.
- For a 2-D look, use a line border.

  Use the HighlightColor property to specify the line border color.

BorderWidth — Width of uipanel border

1 (default) | positive integer value

Width of the uipanel border, specified as a positive integer value. The unit of measurement is pixels. Etched and beveled borders wider than three pixels might not appear correctly at the corners.

HighlightColor — Uipanel border highlight color

RGB triplet | short name | long name

Uipanel border highlight color, specified as an RGB triplet, short name, or long name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`ShadowColor` — Uipanel border shadow color

RGB triplet | short name | long name

Uipanel border shadow color, specified as an RGB triplet, short name, or long name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`

Long Name	Short Name	RGB Triplet
`'black'`	`'k'`	`[0 0 0]`

`Clipping` — Clipping of child components to uipanel

`'on'` (default) | `'off'`

Note: The behavior of the `Clipping` property has changed. It no longer has any effect on uipanels. Child objects are now clipped to the uipanel boundary regardless of the value of this property. This property might be removed in a future release.

Location and Size

`Position` — Location and size of uipanel, including borders and title

`[left bottom width height]`

Location and size of the uipanel, including borders and title, specified as the four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the uipanel
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the uipanel
`width`	Distance between the right and left outer edges of the uipanel
`height`	Distance between the top and bottom outer edges of the uipanel

All measurements are in units specified by the `Units` property.

Note: The `Position` values are relative to the parent container's *drawable area*. The drawable area is the area inside the borders of the container and does not include the area occupied by the title. If the parent container is a figure, then the drawable area also excludes the menu bar and tool bar.

Example: Modify One Value in the Position Vector

You can combine dot notation and array indexing when you want to change one value in the `Position` vector. For example, this code changes the width of the uipanel to `0.5`:

```
p = uipanel;
p.Position(3) = 0.5;
p.Position
```

```
ans =

      0   0   0.5000  1.0000
```

`OuterPosition` — Location and size of uipanel, including borders and title

`[left bottom width height]`

Location and size of the uipanel, including borders and title, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` property value.

`InnerPosition` — Location and size of uipanel, excluding borders and title

`[left bottom width height]`

This property is read-only.

Location and size of the uipanel, excluding borders and title, returned as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Value	Description
`left`	Distance from the inner left edge of the parent container to the inner left edge of the uipanel.
`bottom`	Distance from the inner bottom edge of the parent container to the inner bottom edge of the uipanel.
`width`	Distance between the inner edges of the uipanel's right and left borders.
`height`	Distance between the inner edges of the uipanel's top and bottom borders. This distance excludes the title, if it exists.

All measurements are in units specified by the `Units` property.

Note: These are some important points to consider when using the `InnerPosition` property:

- `InnerPosition` values are affected by the presence of a title, font characteristics, `BorderType`, and `BorderWidth`.
- `InnerPosition` values are relative to the parent container's *drawable area*. The drawable area is the area inside the borders of the container and exclude the area occupied by the title. If the parent container is a figure, then the drawable area also excludes the menu bar and tool bar.

`Units` — Units of measurement

`'normalized'` (default) | `'pixels'` | `'inches'` | `'centimeters'` | `'points'` | `'characters'`

Units of measurement, specified one of the values from this table.

Units Value	Description
`'normalized'`	These units are normalized with respect to the parent container. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.
`'inches'`	Inches.

Units Value	Description
`'centimeters'`	Centimeters.
`'points'`	Points. One point equals 1/72nd of an inch.
`'characters'`	These units are based on the default uicontrol font of the graphics root object: • Character width = width of the letter `x`. • Character height = distance between the baselines of two lines of text. To access the default uicontrol font, use `get(groot,'defaultuicontrolFontName')` or `set(groot,'defaultuicontrolFontName')`.

MATLAB measures all units from the lower left corner of the parent object.

If you change the value of the `Units` property, it is good practice to return it to its default value after completing your computation to avoid affecting other functions that assume the `Units` property is set to the default value.

The order in which you specify the Units and Position properties has these effects:

- If you specify the `Units` property before the `Position` property, then MATLAB sets `Position` using the units you specified.
- If you specify the `Units` property after the `Position` property, MATLAB sets the position using the default `Units`. Then, MATLAB converts the `Position` values to the equivalent values in the units you specified.

`SizeChangedFcn` — Size change callback function

`''` (default) | function handle | cell array | character vector

Size change callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Define this callback to customize the app layout when the size of this container changes (e.g., when the user resizes the window).

The `SizeChangedFcn` callback executes when:

- This container becomes visible for the first time.
- This container is visible while its size changes.
- This container becomes visible for the first time after its size changes. This situation occurs when the size changes while the container is invisible, and then it becomes visible later.

Other important points to consider when defining a `SizeChangedFcn` callback:

- Consider delaying the display of this container until after all the variables that the `SizeChangedFcn` uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the container, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- If your app contains nested containers, they resize from the inside out.
- To access the container that is resizing from within the `SizeChangedFcn`, refer to the source object (the first input argument in the callback) or use the `gcbo` function.

Tip: As an easy alternative to specifying a `SizeChangedFcn` callback, you can set the `Units` property of all the objects you put inside a container to `'normalized'`. Doing so makes those components scale proportionally with the container.

See "Lay Out a UI Programmatically" for more information about managing layouts with `SizeChangedFcn` callbacks.

`ResizeFcn` — Uipanel resize callback function

`''` (default) | function handle | cell array | character vector

Callback function that executes when the uipanel size changes, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.

- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Note: Use of the `ResizeFcn` property is not recommended. It might be removed in a future release. Use `SizeChangedFcn` instead.

Data Types: `function_handle` | `cell` | `char`

Font Style

`FontName` — Font for displaying uipanel title

system supported font name | `'FixedWidth'`

Font for displaying the uipanel title, specified as a system supported font name or `'FixedWidth'`. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, specify 'FixedWidth'. The actual fixed-width font used depends on the FixedWidthFontName property of the root object. Changing the `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Arial'`

`FontSize` — Font size for uipanel title

positive number

Font size for the uipanel title, specified as a positive number. The `FontUnits` property specifies the units. The default size is system-dependent.

Example: `12`

Example: `12.5`

Data Types: `double`

`FontUnits` — Units of font size for uipanel title

`'points'` (default) | `'normalized'` | `'inches'` | `'centimeters'` | `'pixels'`

Units of font size for the uipanel title, specified as one of the values from this table.

Units Value	Description
`'points'`	Points. One point is 1/72nd of an inch.
`'normalized'`	Normalized values for specifying the font size as a fraction of the uipanel height. When you resize the uipanel, MATLAB scales the displayed font to maintain that fraction.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

`FontWeight` — Font weight for the uipanel title

`'normal'` (default) | `'bold'`

Font weight of uipanel title, specified as a value from the following table.

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed in R2014b. If you specify either of these values, the result is a normal font weight.

`FontAngle` — Character slant of the uipanel title

`'normal'` (default) | `'italic'`

Character slant of uipanel title, specified as `'normal'` or `'italic'`. MATLAB uses this property to select a font from those available on your system. Setting this property to `'italic'` selects a slanted version of the font, if it is available on your system.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

Text

`Title` — Uipanel title

character vector

Uipanel title, specified as a character vector.

MATLAB does not interpret a vertical slash (`'|'`) character as a line break, it displays as a vertical slash in the uipanel title.

If you want to specify a Unicode character, pass the Unicode decimal code to the `char` function. For example, `['Multiples of ' char(960)]` displays as `Multiples of` π.

Example: `'Options'`

Example: `['Multiples of ' char(960)]`

`TitlePosition` — Location of uipanel title

`'lefttop'` (default) | `'centertop'` | `'righttop'` | `'leftbottom'` | `'centerbottom'` | `'righttbottom'`

Location of the uipanel title, specified as `'lefttop'`, `'centertop'`, `'righttop'`, `'leftbottom'`, `'centerbottom'`, or `'righttbottom'`.

Interactive Control

`ButtonDownFcn` — Button-press callback function

`''` (default) | function handle | cell array | character vector

Button-press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.

- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `ButtonDownFcn` callback is a function that executes when the user clicks a mouse button on the uipanel.

`UIContextMenu` — Uipanel context menu
empty `GraphicsPlaceholder` array (default) | uicontextmenu object

Uipanel context menu, specified as a uicontextmenu object. Use this property to display a context menu when the user right-clicks on the uipanel. Create the context menu using the `uicontextmenu` function.

`Selected` — Selection status of uipanel
`'off'` (default) | `'on'`

Note: The behavior of the `Selected` property changed in R2014b, and it is not recommended. It no longer has any effect on uipanels. This property might be removed in a future release.

`SelectionHighlight` — Ability to highlight selection handles
`'on'` (default) | `'off'`

Note: The behavior of the `SelectionHighlight` property changed in R2014b, and it is not recommended. It no longer has any effect on uipanels. This property might be removed in a future release.

Callback Execution Control

`Interruptible` — Callback interruption
`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

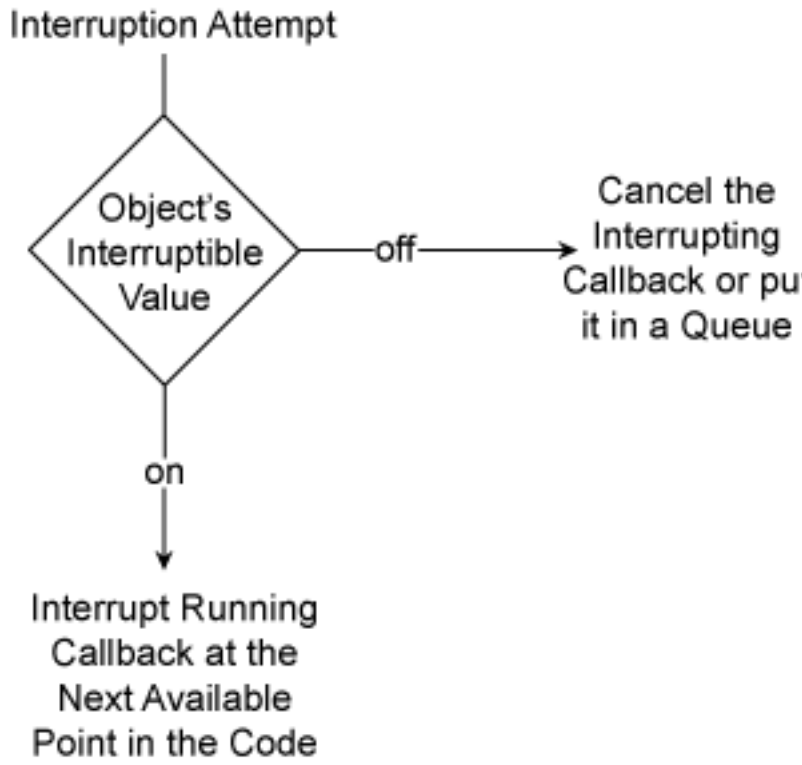

If a uipanel callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See "Interrupt Callback Execution" for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

`HitTest` — Ability to become current object

`'on'` (default) | `'off'`

Ability to become current object, specified as `'on'` or `'off'`:

- Setting the value to `'on'` allows the uipanel to become the current object when the user clicks on it. A value of `'on'` also allows the figure `CurrentObject` property and the `gco` function to report the uipanel as the current object.
- Setting the value to `'off'` sets the figure `CurrentObject` property to an empty `GraphicsPlaceholder` array when the user clicks on the uipanel.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn`

property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uipanel creation function

function handle | cell array | character vector

Uipanel creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uipanel. MATLAB initializes all uipanel property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uipanel that is being created.

Setting the `CreateFcn` property on an existing uipanel has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uipanel object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uipanel deletion function

function handle | cell array | character vector

Uipanel deletion function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uipanel (for example, when the end user deletes the figure). MATLAB executes the `DeleteFcn` callback before destroying the properties of the uipanel. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uipanel that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uipanel'`

This property is read-only.

Type of graphics object, returned as `'uipanel'`.

`Tag` — Uipanel identifier

`''` (default) | character vector

Uipanel identifier, specified as a character vector. This value to serves as an identifier for the uipanel. When you need access to the uipanel elsewhere in your code, you can use the `findobj` function to search for the uipanel based on the `Tag` value.

Example: `'panel1'`

Data Types: `char`

`UserData` — Data to associate with the uipanel object

empty array (default) | array

Data to associate with the uipanel object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See "Share Data Among Callbacks" for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Uipanel parent

figure | uipanel | uibuttongroup | uitab

Uipanel parent, specified as a figure, uipanel, uibuttongroup, or uitab. You can move a uipanel to a different figure, uipanel, uibuttongroup, or uitab by setting this property to the handle of the target figure, uipanel, uibuttongroup, or uitab.

`Children` — Children of uipanel

empty `GraphicsPlaceholder` array (default) | 1-D array of component objects

Children of uipanel, returned as an empty `GraphicsPlaceholder` or a 1-D array of component objects. The children of uipanel can be axes, uipanels, uibuttongroups, and uicontrols.

You cannot add or remove children using the `Children` property of the uipanel. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the front-to-back order (stacking order) of the components on the screen.

To add a child to this list, set the `Parent` property of the child component to be the uipanel object.

Objects with the `HandleVisibility` property set to `'off'` do not list in the `Children` property. For more information, see the `HandleVisibility` property description.

`HandleVisibility` — Visibility of Uipanel handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uipanel handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uipanel handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties.

These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object's handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uipanel handle is always visible.
`'callback'`	The uipanel handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uipanel at the command-line, but allows callback functions to access it.
`'off'`	The uipanel handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

See Also

See Also

`figure` | `uipanel`

Topics

"Access Property Values"
"Default Property Values"

uipushtool

Create push button on toolbar

Syntax

```
p = uipushtool
p = uipushtool(Name,Value,...)
p = uipushtool(parent)
p = uipushtool(parent,Name,Value,...)
```

Description

`p = uipushtool` creates a uipushtool in the current figure's uitoolbar and returns the uipushtool object, `p`. If there is no uitoolbar available, then MATLAB creates a new uitoolbar in the current figure to serve as the parent. Similarly, if there no figure is available, then MATLAB creates a new figure with a uitoolbar.

`p = uipushtool(Name,Value,...)` creates a uipushtool and specifies one or more uipushtool property names and corresponding values. Use this syntax to override the default uipushtool properties.

`p = uipushtool(parent)` creates a uipushtool and designates a specific parent object. The `parent` argument must be a uitoolbar object.

`p = uipushtool(parent,Name,Value,...)` creates a uipushtool with a specific parent and one or more uipushtool properties.

A uipushtool is a push button that appears in the figure's tool bar. The button has no icon, but its borders highlight when the user hovers over it with the mouse. You can create a button icon by setting the uipushtool's `CData` property.

Examples

Create uipushtool With Icon and Tool Tip

```
f  = figure('ToolBar','none');
```

```
t = uitoolbar(f);

% Read an image
[img,map] = imread(fullfile(matlabroot,...
            'toolbox','matlab','icons','matlabicon.gif'));

% Convert image from indexed to truecolor
icon = ind2rgb(img,map);

% Create a uipushtool in the toolbar
p = uipushtool(t,'TooltipString','Toolbar push button',...
                 'ClickedCallback',...
                 'disp(''Clicked uipushtool.'')');

% Set the button icon
p.CData = icon;
```

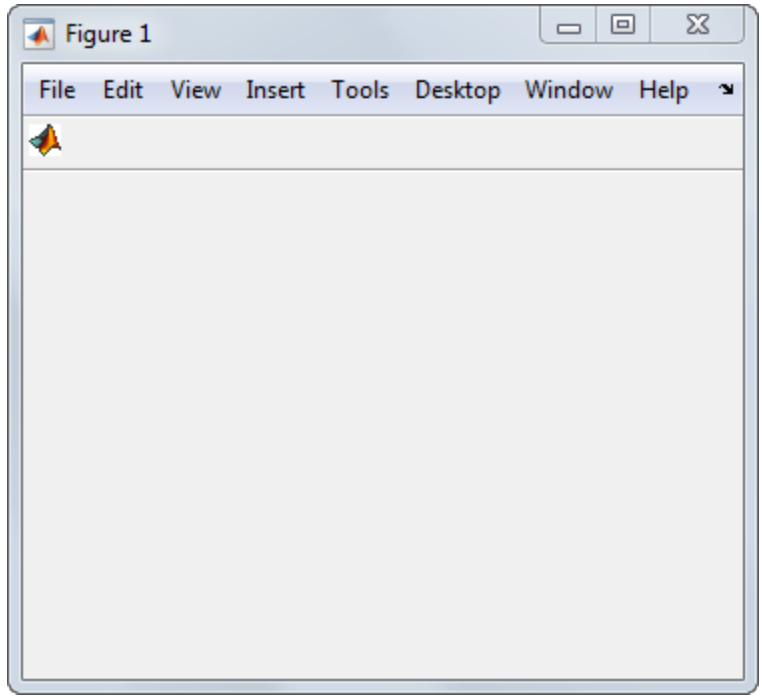

Tips

- Uitoolbars (and their child uipushtools) do not appear in figures whose WindowStyle property is set to `'Modal'`. If a figure containing a uitoolbar is changed to `'Modal'`, the uitoolbar still exists in the Children property of the figure. However, the uitoolbar does not display while `WindowStyle` is set to `'Modal'`.
- Unlike uicontrol push buttons, uipushtools do not set the figure's `SelectionType` property to `'open'` on the second click.

See Also

See Also

Uipushtool Properties | `uitoggletool` | `uitoolbar`

Topics

"Access Property Values"
"Create Toolbars for Programmatic Apps"

Introduced before R2006a

Uipushtool Properties

Control appearance and behavior of uipushtool

Description

Uipushtools are push buttons that appear on the tool bar at the top of the a figure. The `uipushtool` function creates a push button on a tool bar and sets any required properties before displaying it. By changing uipushtool property values, you can modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
p = uipushtool;
sep = p.Separator;
p.Separator = 'on';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Visible` — Uipushtool visibility

`'on'` (default) | `'off'`

Uipushtool visibility, specified as `'on'` or `'off'`. When the `Visible` property is set to `'off'`, the uipushtool is not visible, but you can query and set its properties.

`Separator` — Separator line mode

`'off'` (default) | `'on'`

Separator line mode, specified as `'off'` or `'on'`. Setting this property to `'on'` draws a dividing line to left of the uipushtool.

`CData` — Optional image to display on uipushtool

3-D array of truecolor RGB values

Optional image to display on the uipushtool, specified as a 3-D array of truecolor RGB values. The values in the array can be:

- Double-precision values between `0.0` and `1.0`

- `uint8` values between `0` and `255`

The length of the array's first and second dimensions must be less than or equal to 16. Otherwise, it might be clipped or distorted when it displays.

Data Types: `double` | `uint8`

Interactive Control

`ClickedCallback` — Callback function that executes when user clicks uipushtool

`''` (default) | function handle | cell array | character vector

Callback function that executes when a user clicks the uipushtool, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying callback functions as function handles, cell arrays, or character vectors, see "How to Specify Callback Property Values".

Data Types: `function_handle` | `cell` | `char`

`Enable` — Operational state of uipushtool

`'on'` (default) | `'off'`

Operational state of uipushtool, specified as `'on'` or `'off'`. The `Enable` property controls whether the uipushtool responds to button clicks. The are two possible values:

- `'on'` – The uipushtool is operational.
- `'off'` – The uipushtool is not operational and appears grayed out.

The value of the `Enable` property and the type of button click determine the response.

Enable Value	Response to Left-Click	Response to Right-Click
`'on'`	The uipushtool's `ClickedCallback` function executes.	The uipushtool is not operational. No callback executes.

Enable Value	Response to Left-Click	Response to Right-Click
`'off'`	The uipushtool is not operational. No callback executes.	The uipushtool is not operational. No callback executes.

`TooltipString` — Tooltip text

character vector

Tooltip text, specified as a character vector. When the user hovers the mouse pointer over the uipushtool and leaves it there, the tooltip appears.

Example: `'Some text'`

`UIContextMenu` — Context menu

empty `GraphicsPlaceholder` array (default) | uicontextmenu handle

This property has no effect on uipushtools.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

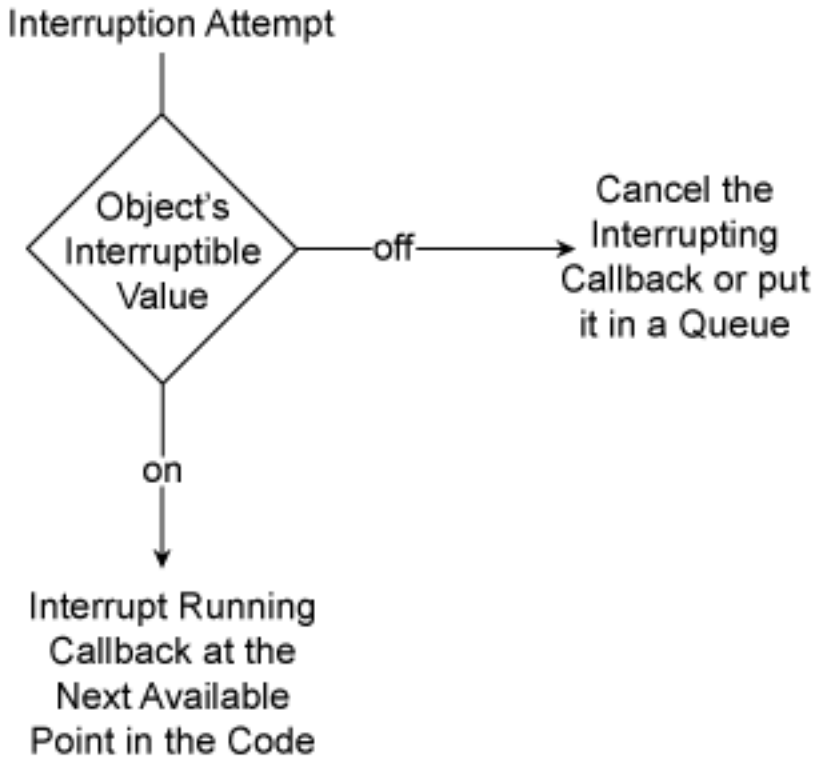

If a uipushtool callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See "Interrupt Callback Execution" for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

`HitTest` — Ability to become current object

`'on'` (default) | `'off'`

This property has no effect on the uipushtool.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uipushtool creation function

function handle | cell array | character vector

Uipushtool creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.

- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uipushtool. MATLAB initializes all uipushtool property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uipushtool that is being created.

Setting the `CreateFcn` property on an existing uipushtool has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uipushtool object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uipushtool deletion function

function handle | cell array | character vector

Uipushtool deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uipushtool (for example, when the end user deletes the figure). MATLAB executes the `DeleteFcn` callback before destroying the properties of the uipushtool. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uipushtool that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uipushtool'`

This property is read-only.

Type of graphics object, returned as `'uipushtool'`.

`Tag` — Uipushtool identifier

`''` (default) | character vector

Uipushtool identifier, specified as a character vector. This value to serves as an identifier for the uipushtool. When you need access to the uipushtool elsewhere in your code, you can use the `findobj` function to search for the uipushtool based on the `Tag` value.

Example: `'pushtool1'`

Data Types: `char`

`UserData` — Data to associate with the uipushtool object

empty array (default) | array

Data to associate with the uipushtool object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See "Share Data Among Callbacks" for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Uipushtool parent

uitoolbar

Uipushtool parent, specified as a uitoolbar. You can move a uipushtool to a different uitoolbar by setting this property to the handle of the target uitoolbar.

`HandleVisibility` — Visibility of Uipushtool handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uipushtool handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uipushtool handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties. These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object's handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uipushtool handle is always visible.
`'callback'`	The uipushtool handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uipushtool at the command-line, but allows callback functions to access it.
`'off'`	The uipushtool handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

See Also

See Also

`uipushtool` | `uitoolbar`

Topics

"Access Property Values"
"Default Property Values"

uiputfile

Open dialog box for saving files

Syntax

```
FileName = uiputfile
[FileName,PathName] = uiputfile
[FileName,PathName,FilterIndex] = uiputfile(FilterSpec)
[FileName,PathName,FilterIndex] = uiputfile(FilterSpec,DialogTitle)
[FileName,PathName,FilterIndex] =
uiputfile(FilterSpec,DialogTitle,DefaultName)
```

Description

`FileName = uiputfile` displays a modal dialog box for selecting or specifying a file you want to create or save. The dialog box lists the files and folders in the current folder. If the selected or specified file name is valid, `uiputfile` returns that name in `FileName`.

`[FileName,PathName] = uiputfile` also returns the path to `FileName` in `PathName`, or if you cancel the dialog, returns `0` for both arguments. If you do not provide any output arguments, the file name alone is returned in `ans`.

`[FileName,PathName,FilterIndex] = uiputfile(FilterSpec)` displays only those files with extensions that match `FilterSpec`. On some platforms `uiputfile` also displays in gray any files that do not match `FilterSpec`. The `uiputfile` function appends `'All Files'` to the list of file types. `FilterSpec` can be a character vector or a cell array of character vectors, and can include the `*` and `?` wildcard characters. For example, `'*.m'` lists all MATLAB program files with a `.m` extension in a folder.

`FilterSpec` can be a character vector that contains a file name. `uiputfile` displays the file name selected in the **File name** field and uses the file extension as the default filter. The `FilterSpec` value can include a path, or consist of a path only. To specify a folder only, make the last character in `DefaultName` `'\'` or `'/'`. A path can contain special path characters, such as `'.'`, `'..'`, `'/'`, `'\'`, or `'~'`. For example, `'../*.m'` lists all program files with a `.m` extension in the folder above the current folder. If `FilterSpec` is a cell array of character vectors, the first column contains a list of file

extensions. The optional second column contains a corresponding list of descriptions. These descriptions replace the default descriptions in the **Save as type** pop-up menu. A description cannot be an empty character vector. See the "Examples" on page 1-11971 for illustration of using cell arrays as `FilterSpec`. If you do not specify `FilterSpec`, `uiputfile` uses the default list of file types (all MATLAB files). `FilterIndex` is the index of the filter selected in the dialog box. Indexing starts at 1. If you click the **Cancel** button, the window's close box, or if the file does not exist, `uiputfile` returns `FilterIndex` as `0`.

`[FileName,PathName,FilterIndex] = uiputfile(FilterSpec,DialogTitle)` displays a dialog box that has the title `DialogTitle`. To use the default file types and to specify a dialog title, enter `uiputfile('','DialogTitle')`

`[FileName,PathName,FilterIndex] = uiputfile(FilterSpec,DialogTitle,DefaultName)` displays a dialog box in which the file name specified by `DefaultName` appears in the **File name** field. `DefaultName` can also be a path or a path+filename. To specify a folder only, make the last character in `DefaultName` `'\'` or `'/'`. In this case, `uiputfile` opens the dialog box in the folder specified by the path. If you specify a path in `DefaultName` that does not exist, `uiputfile` opens the dialog box in the current folder. You can use `'.'`,`'..'`, `'\'`, `'/'`, or ~ in the `DefaultName` argument.

When typing into the dialog box, if you include either of the wildcard characters `'*'` or `'?'` in a file name, `uiputfile` does not respond to clicking **Save**. The dialog box remains open until you cancel it or remove the wildcard characters. This restriction applies to all platforms, even to file systems that permit these characters in file names.

If you select or specify an existing file name, a warning dialog box opens stating that the file already exists and asks if you want to replace it.

Select **Yes** to replace the existing file or **No** to return to the dialog to select another file name. Selecting **Yes** returns the name of the file. Selecting **No** returns `0`.

The visual characteristics of the dialog box depend on the operating system that is running MATLAB.

Note: These are some important points to consider when using `uiputfile`.

- Successful execution of `uiputfile` does not create a file; it only returns the name of a new or existing file that you designate.

- The visual characteristics of the dialog box depend on the operating system that runs your code. For instance, some operating systems do not show title bars on dialog

  boxes. If you pass a dialog box title to the uiputfile function, those operating systems will not display the title.

Examples

The following statement displays a dialog box entitled `'Save file name'`. This command also sets the **File name** field to `animinit.m`, and it sets the filter to files with a `.m` extension.

```
[file,path] = uiputfile('animinit.m','Save file name');
```

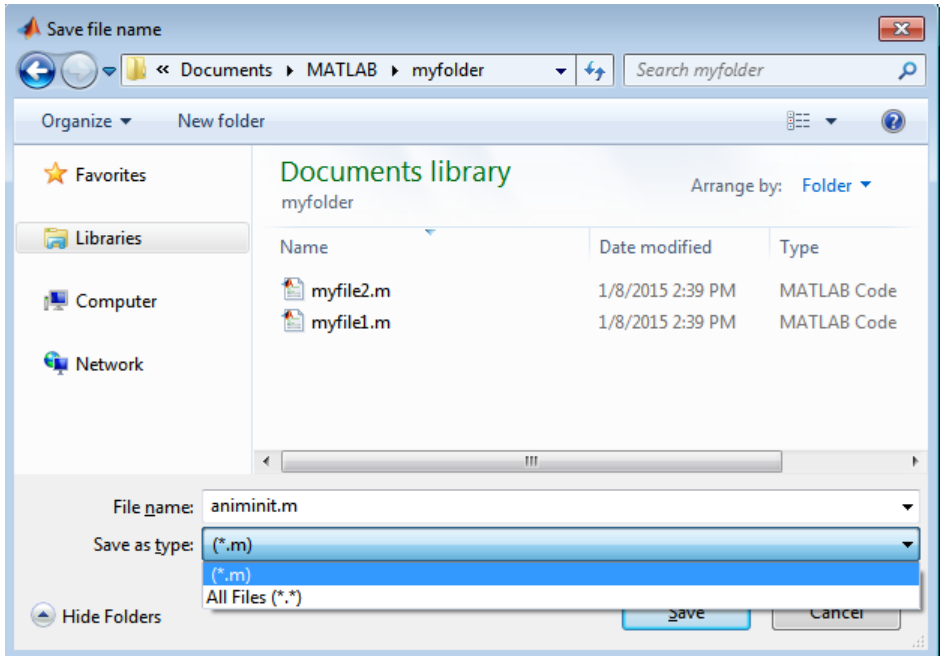

The following statement displays a dialog box entitled `'Save Workspace As'` with the filter set to MAT-files.

```
[file,path] = uiputfile('*.mat','Save Workspace As');
```

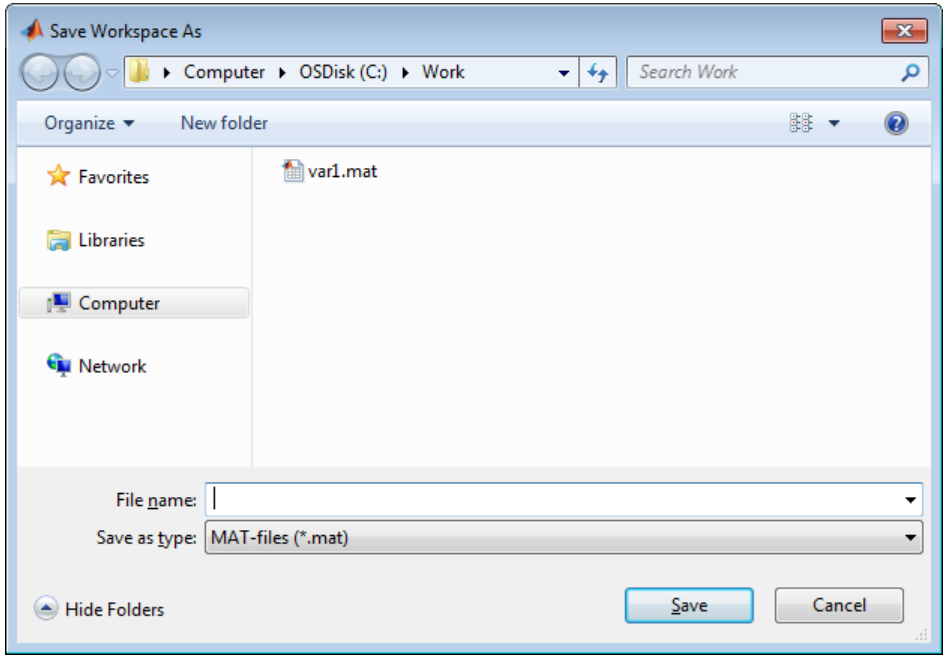

To display several file types in the **Save as type** list box, separate each file extension with a semicolon, as in the following code.

```
[filename, pathname] = uiputfile(...
 {'*.m';'*.slx';'*.mat';'*.*'},...
 'Save as');
```

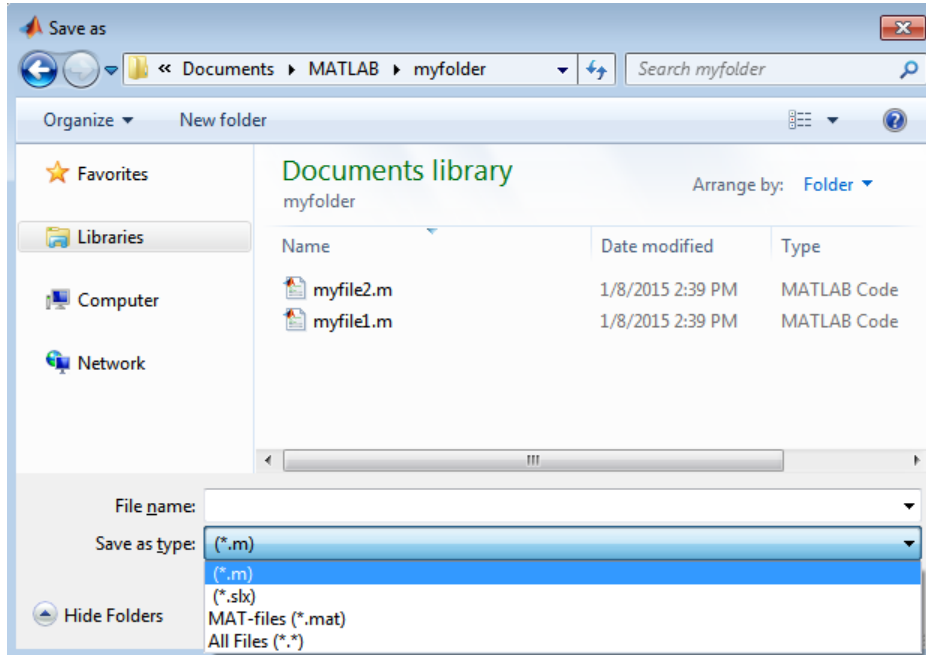

To create a list of file types and give them descriptions that are different from the defaults, use a cell array. This example also associates multiple file types with the `'MATLAB Files'` and `'Models'` descriptions.

```
[filename, pathname, filterindex] = uiputfile( ...
{'*.m;*.fig;*.mat;*.slx;*.mdl',...
 'MATLAB Files (*.m,*.mlx,*.fig,*.mat,*.slx,*.mdl)';
 '*.m;*.mlx', 'program files (*.m,*.mlx)';...
 '*.fig','Figures (*.fig)';...
 '*.mat','MAT-files (*.mat)';...
 '*.slx;*.mdl','Models (*.slx,*.mdl)';...
 '*.*',  'All Files (*.*)'},...
 'Save as');
```

The first column of the cell array contains the file extensions, while the second contains the descriptions you want to provide for the file types. The first entry of column one contains several extensions separated by semicolons. These file types all associate with the description `'MATLAB Files (*.m,*.mlx,*.fig,*.mat,*.slx,*.mdl)'`. The code produces the dialog box shown in the following figure.

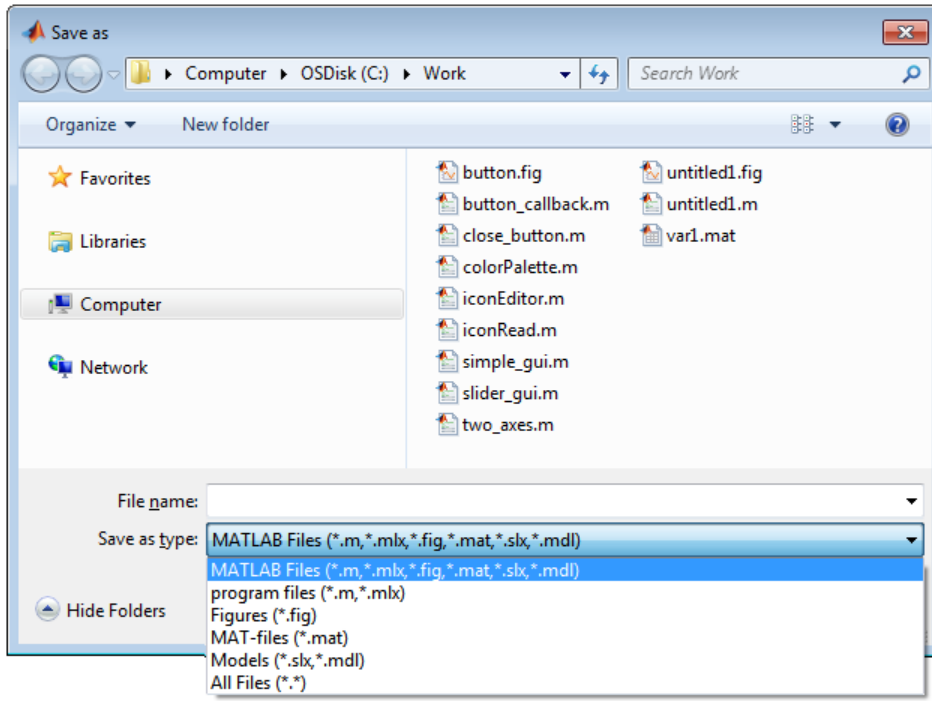

The following code checks for the existence of the file and displays a message about the result of the file selection operation.

```
[filename, pathname] = uiputfile('*.m',...
                       'Pick a MATLAB program file');
if isequal(filename,0) || isequal(pathname,0)
   disp('User selected Cancel')
else
   disp(['User selected ',fullfile(pathname,filename)])
end
```

Select or enter a file name for saving a figure as an image in one of four formats, described in a cell array.

```
uiputfile({'*.jpg;*.tif;*.png;*.gif','All Image Files';...
          '*.*','All Files' },'Save Image',...
          'C:\Work\newfile.jpg')
```

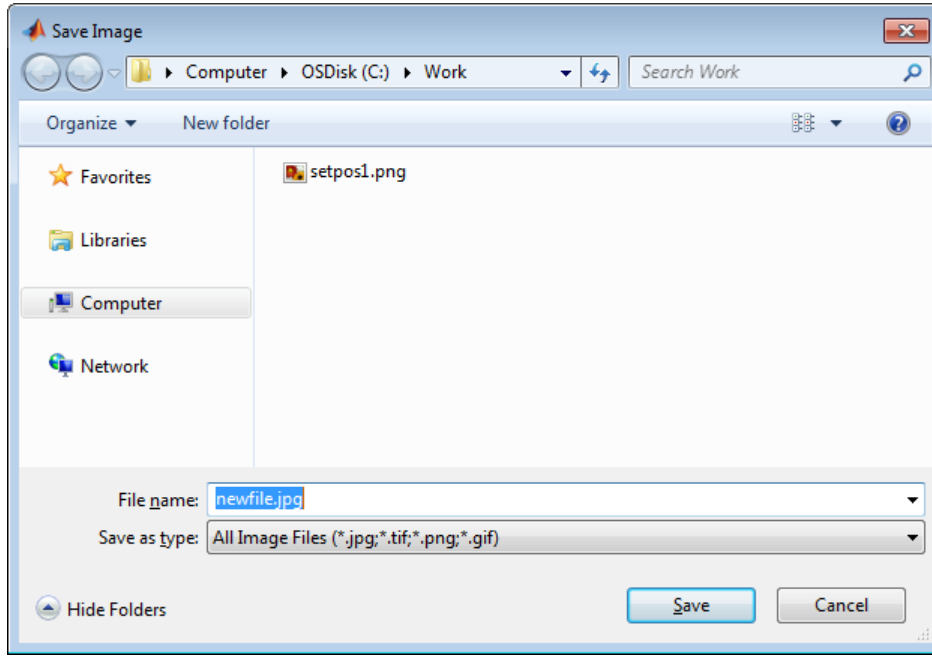

See Also

`save` | `uigetdir` | `uisave` | `uigetfile`

Introduced before R2006a

uiresume

Resume execution of blocked program

Syntax

```
uiresume(h)
```

Description

`uiresume(h)` resumes the program execution that `uiwait` suspended.

Examples

This example code creates a window containing a push button. The `uiwait` function blocks MATLAB execution until the user clicks the push button.

```
f = figure;
h = uicontrol('Position',[20 20 200 40],'String','Continue',...
              'Callback','uiresume(gcbf)');
disp('This will print immediately');
uiwait(gcf);
disp('This will print after you click Continue');
close(f);
```

The `gcbf` function returns the current figure.

Tips

The `uiwait` and `uiresume` functions block and resume MATLAB program execution. When creating a dialog box, you should have a uicontrol component with a callback that calls `uiresume` or a callback that destroys the dialog box. These are the only methods that resume program execution after the `uiwait` function blocks execution.

When used in conjunction with a modal dialog box, `uiresume` can resume the execution of the program that `uiwait` suspended while presenting a dialog box.

See Also

See Also

`dialog` | `figure` | `uicontrol` | `uimenu` | `uiwait` | `waitfor`

Topics

"Modal Dialog Box in GUIDE"

Introduced before R2006a

uisave

Open dialog box for saving variables to MAT-file

Syntax

```
uisave
uisave(variables)
uisave(variables,filename)
```

Description

`uisave`, with no arguments, prompts you for a file name, and then saves all variables from your workspace to that file.

`uisave(variables)` saves one or more workspace variables listed in `variables`. The `variables` argument is a character vector or a cell array of character vectors.

`uisave(variables,filename)` uses the specified `filename` as the default **File name** in the Save Workspace Variables dialog box, instead of the default `matlab.mat`.

Input Arguments

`variable`

Character vector or cell array of character vectors containing one or more variable names in the current workspace. Use a cell array of character vectors to specify more than one variable.

Default: All variables in the current workspace are saved to a MAT-file.

`filename`

Character vector that specifies the file name that appears in the **File name** field when the dialog box opens. You can omit a file extension, or specify the file extension as `'.mat'`.

Default: `'matlab.mat'`

Examples

Create workspace variables `h` and `g`, and then display the Save Workspace Variables dialog box in the current folder with the default **File name** set to `var1`.

```
h = 365;
g = 52;
uisave({'h','g'},'var1');
```

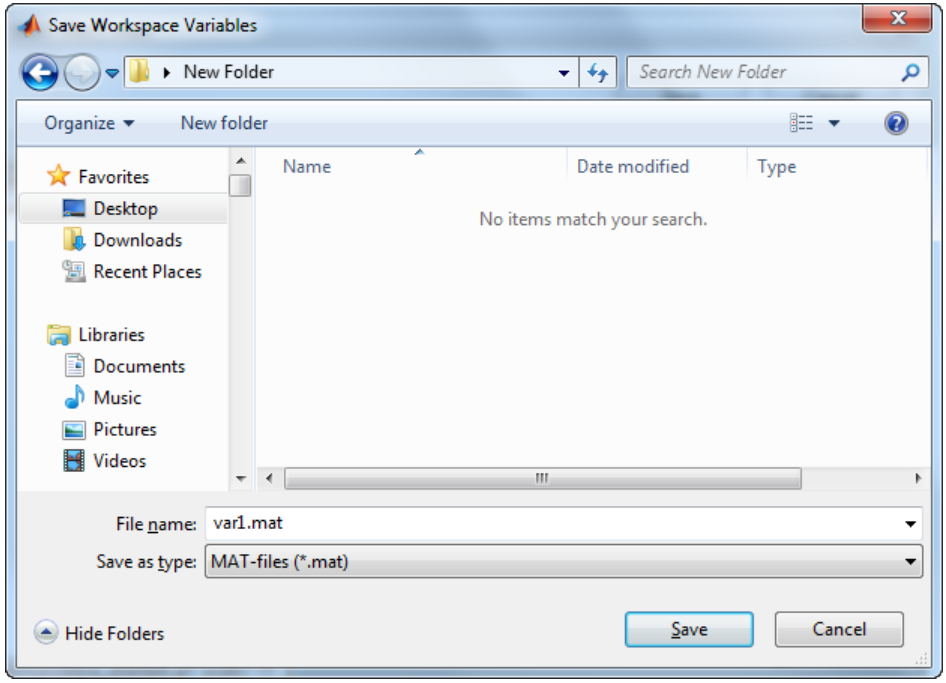

Clicking **Save** stores the workspace variables `h` and `g` in the file `var1.mat` in the displayed folder.

Definitions

Modal Dialog

A modal dialog box prevents the user from interacting with other windows before responding. For more information, see `WindowStyle` in Figure Properties.

Tips

- If you type a name in the **File name** field, such as `my_vars`, and click **Save**, the dialog saves all workspace variables to the file `my_vars.mat`. The default filename is `matlab.mat`.
- `uisave` calls `uiputfile` to choose a filename.
- If the filename you specify exists in that folder, `uisave` informs you and gives you a chance to cancel the operation.
- The `uisave` dialog box is modal.
- The `uisave` dialog is modal. A modal dialog box prevents you from interacting with other windows until you respond to it.

See Also

See Also

`save` | `uigetfile` | `uiopen` | `uiputfile`

Topics

"Save and Load Workspace Variables"

Introduced before R2006a

uisetcolor

Open color picker

Syntax

```
c = uisetcolor
c = uisetcolor(RGB)
c = uisetcolor(obj)

c = uisetcolor( ___ ,title)
```

Description

`c = uisetcolor` displays a modal color picker and returns the selected color as an RGB triplet. The RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the selected color. The intensities are in the range [0,1] and are of type `double`.

`c = uisetcolor(RGB)` specifies the default color selection as an RGB triplet.

`c = uisetcolor(obj)` sets the default color selection to be the color of an object (such as a `Figure`). The object must have the `Color` property.

`c = uisetcolor( ___ ,title)` specifies a custom title for the dialog box. Specify the title as the last argument for any of the above syntaxes.

Examples

Specify the Default Color

Open the color picker with light blue as the default color.

```
c = uisetcolor([0.6 0.8 1])
```

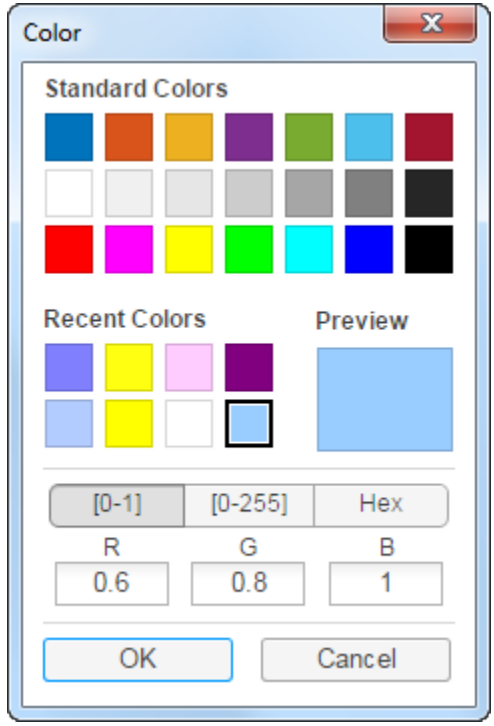

Clicking the **OK** button without selecting a different color returns the default color.

```
c =

    0.6000    0.8000    1.0000
```

Specify a Custom Title for the Dialog Box

Open the color picker with yellow as the default color and set the title to `'Select a Color'`.

```
c = uisetcolor([1 1 0],'Select a color')
```

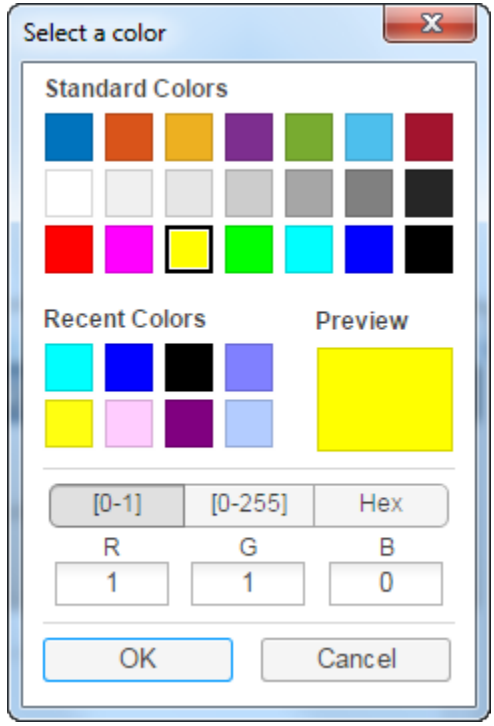

Clicking the **OK** button without selecting a different color returns the default color.

```
c =

     1     1     0
```

Input Arguments

RGB — Default color

`[1 1 1]` (default) | RGB triplet

Default color, specified as an RGB triplet. An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the selected color. The intensities must be in the range [0,1].

Example: `c = uisetcolor([1 0 0])` specifies red as the default color selection.

Example: `c = uisetcolor([0.5 0.5 0.5])` specifies gray as the default color selection.

Data Types: `single` | `double`

`obj` — Source object for default color
graphics object

Source object for default color, specified as a graphics object. You must specify an object (such as a `Figure` or `Axes`) that has the `Color` property.

Example: `c = uisetcolor(figure)` creates a `Figure` and sets the default color selection to be the same color as the figure.

`title` — Title of dialog box
`''` (default) | character vector

Title of dialog box, specified as a character vector.

Example: `c = uisetcolor('Choose a Color')` specifies `'Choose a Color'` as the dialog box title.

Data Types: `char`

Definitions

Modal Window

A window that blocks interaction with other windows until the user closes it.

See Also

See Also

`dialog` | `questdlg` | `uigetdir` | `uigetfile` | `uiputfile`

Introduced before R2006a

uisetfont

Open font selection dialog box

Syntax

```
uisetfont
uisetfont(h)
uisetfont(S)
uisetfont(...,'DialogTitle')
S = uisetfont(...)
```

Description

`uisetfont` enables you to change font properties (`FontName`, `FontUnits`, `FontSize`, `FontWeight`, and `FontAngle`) for a `text`, `axes`, or `uicontrol` object. The function returns a structure consisting of font properties and values. You can specify an alternate title for the dialog box.

`uisetfont` displays a modal dialog box and returns the selected font properties.

Note A modal dialog box prevents the user from interacting with other windows before responding. For more information, see `WindowStyle` in Figure Properties.

`uisetfont(h)` displays a modal dialog box, initializing the font property values with the values of those properties for the object whose handle is `h`. Selected font property values are applied to the current object. If a second argument is supplied, it specifies a name for the dialog box.

`uisetfont(S)` displays a modal dialog box, initializing the font property values with the values defined for the specified structure (`S`). `S` must define legal values for one or more of these properties: `FontName`, `FontUnits`, `FontSize`, `FontWeight`, and `FontAngle` and the field names must match the property names exactly. If other properties are defined, they are ignored. If a second argument is supplied, it specifies a name for the dialog box.

`uisetfont(...,'DialogTitle')` displays a modal dialog box with the title `DialogTitle` and returns the values of the font properties selected in the dialog box.

`S = uisetfont(...)` returns the properties `FontName`, `FontUnits`, `FontSize`, `FontWeight`, and `FontAngle` as fields in a structure. If the user presses **Cancel** from the dialog box or if an error occurs, the output value is set to 0.

Examples

Set Font Characteristics for a Plot Annotation

Create a plot containing a text annotation

```
f = figure('Position',[200 200 392 294]),;
x = 0:pi/20:2*pi;
y = sin(x);
plot(x,y);
t = text(pi,0,'\leftarrow sin(\pi)');
```

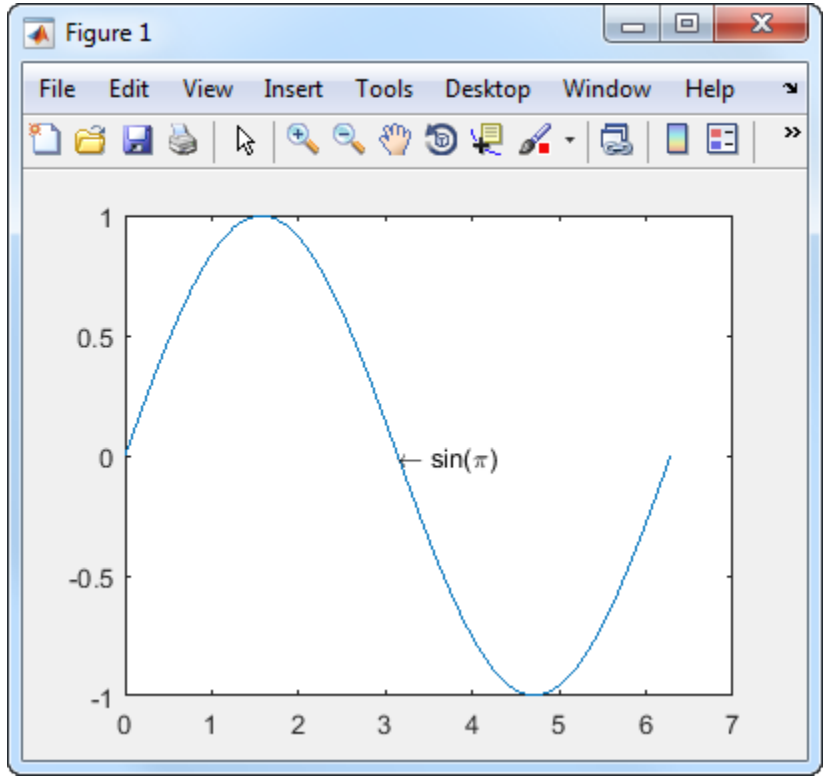

Open the **Font** dialog box, and select the **Bold Italic** style. The fonts displayed in the dialog box might be different on your system.

```
S = uisetfont(t);
```

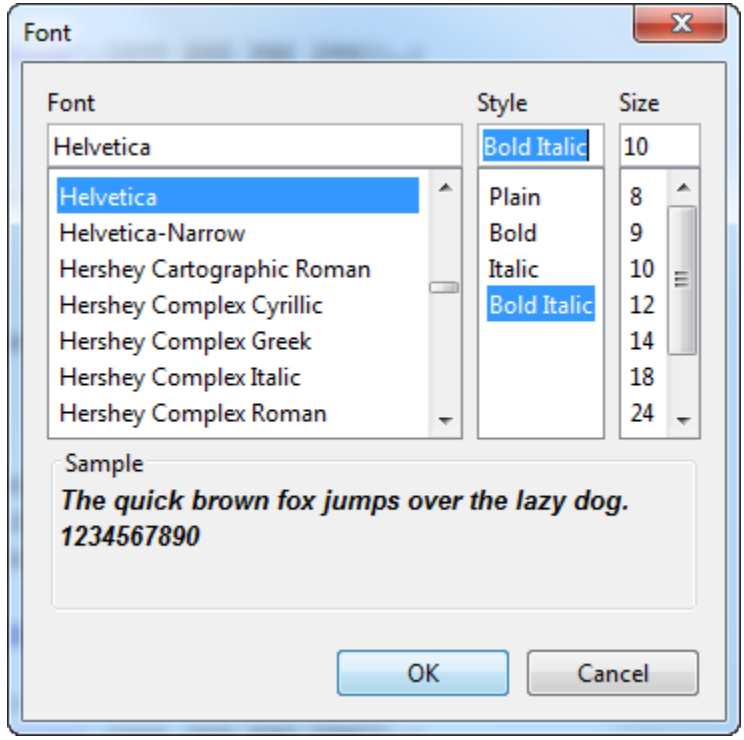

After you click **OK**, the font style changes in the plot.

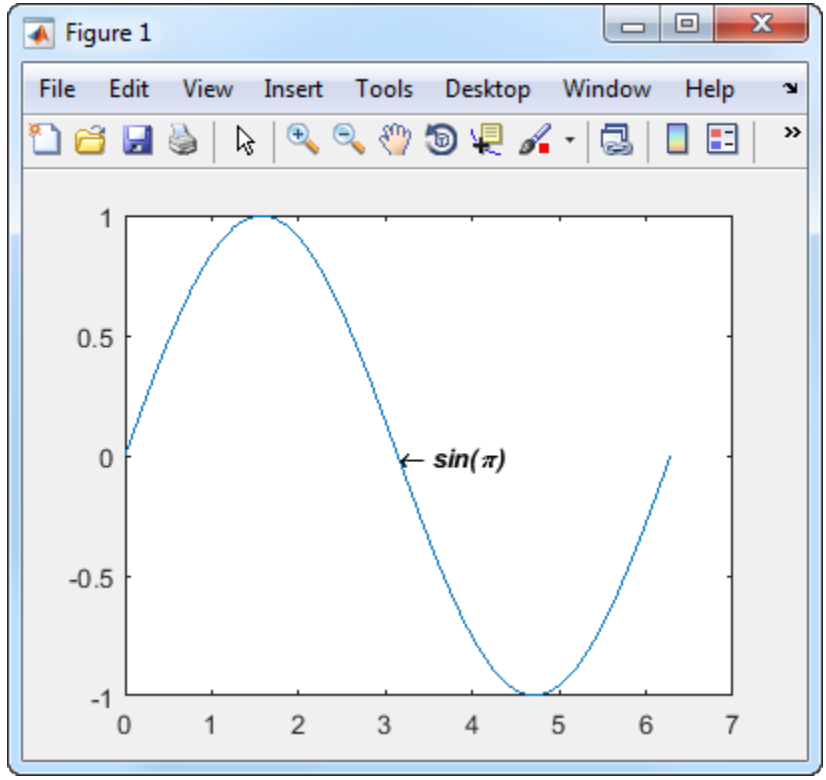

See Also

axes | text | uicontrol

Introduced before R2006a

uisetpref

Manage preferences used in `uigetpref`

Syntax

```
uisetpref('clearall')
```

Description

`uisetpref('clearall')` resets the value of all preferences registered through `uigetpref` to `'ask'`. This causes the dialog box to display when you call `uigetpref`.

Note Use `setpref` to set the value of a particular preference to `'ask'`.

See Also

`setpref` | `uigetpref`

Introduced before R2006a

uistack

Reorder visual stacking order of objects

Syntax

```
uistack(h)
uistack(h,stackopt)
uistack(h,stackopt,step)
```

Description

`uistack(h)` shifts object `h` up one level within the visual stacking order of UI objects. You can also specify `h` to be a vector of UI objects. When `h` is a vector, the objects stack according to their order in the vector. All items in the stack must share the same parent.

`uistack(h,stackopt)` moves the object `h` to another place in the stack according to `stackopt`:

- `'up'` – moves `h` up one position in the stacking order
- `'down'` – moves `h` down one position in the stacking order
- `'top'` – moves `h` to the top of the current stack
- `'bottom'` – moves `h` to the bottom of the current stack

`uistack(h,stackopt,step)` moves object `h` up or down the number of levels specified by `step`. For example, `uistack(h,'up',2)` moves `h` up two levels in the stack.

Note: The `uistack` function might return different results, starting in R2014b. For more information about how the stacking behavior of UI components has changed, see "Why Are Some Components Missing or Partially Obscured?".

Examples

Change Stacking Order of Two Plots in a Figure

Create a figure containing a uipanel and a child axes. Then, plot a sine function in the axes.

```
f = figure;
p1 = uipanel(f,'Position',[.10 .10 .80 .80],...
             'Tag','Panel with Sine Plot');
ax1 = axes('Parent',p1,'Position',[.1 .1 .8 .8]);

theta = -3*pi:pi/64:3*pi;
y1 = sin(theta);
plot(ax1,theta,y1);
```

In the same figure, create a second uipanel with a child axes. Then, create a surface plot in this axes.

```
p2 = uipanel(f,'Position',[.10 .10 .80 .80],...
             'Tag','Panel with Surface Plot');
ax2 = axes('Parent',p2,'Position',[.1 .1 .8 .8]);
Z  = peaks(25);
surf(ax2,Z);
```

Next, move the uipanel containing the sine function to the top.

```
uistack(p1,'top');
f.Children

ans =

  2x1 Panel array:

  Panel    (Panel with Sine Plot)
  Panel    (Panel with Surface Plot)
```

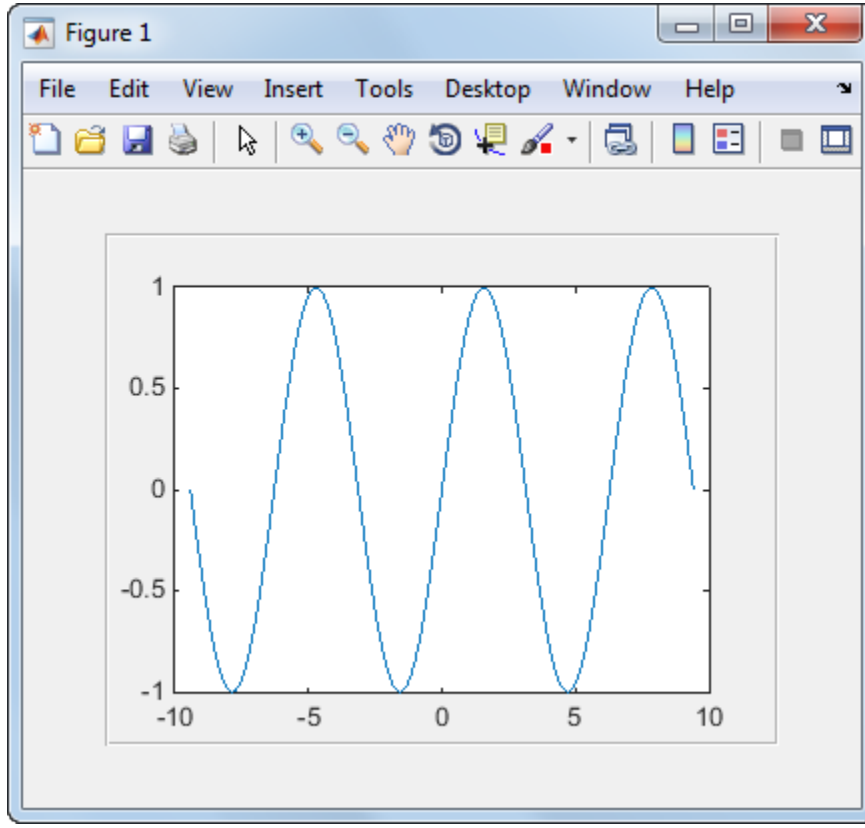

Now, move the other uipanel to the top.

```
uistack(p2,'top');
f.Children
```

```
ans =

  2x1 Panel array:

  Panel    (Panel with Surface Plot)
  Panel    (Panel with Sine Plot)
```

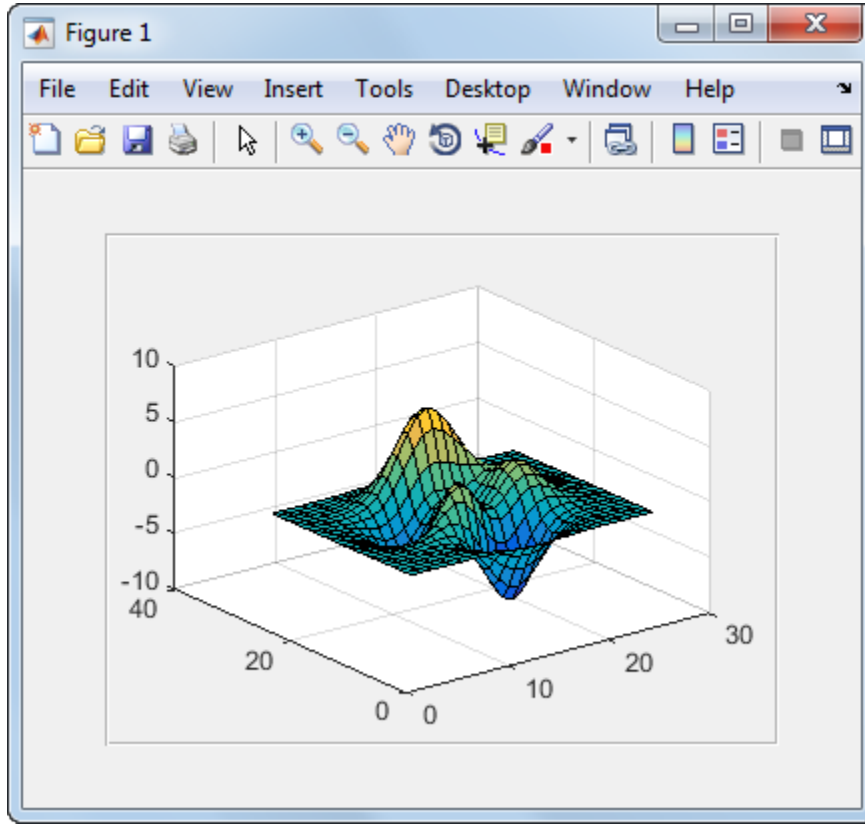

Definitions

Visual Stacking Order

The order of overlapping components in a UI window. Components on top of the stack appear in front of components that are lower in the stack.

See Also

See Also

`figure` | `uibuttongroup` | `uipanel` | `uitab`

Topics

"Manage the Stacking Order of Grouped Components"

Introduced before R2006a

uitab

Create tabbed panel

Syntax

```
t = uitab

t = uitab(parent)
t = uitab( ___ ,Name,Value)
```

Description

`t = uitab` creates a tab in an existing tab group within a "traditional figure" on page 1-11999 and returns the tab object. If there is no tab group within a traditional figure available, then MATLAB creates a new tab group in a traditional figure.

`t = uitab(parent)` creates a tab and specifies the parent `TabGroup` object for the tab.

`t = uitab( ___ ,Name,Value)` specifies tab properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Examples

Create Tabs in Tab Group within Traditional Figure

Create a traditional figure containing a tab group and two tabs.

```
f = figure;
tabgp = uitabgroup(f,'Position',[.05 .05 .3 .8]);
tab1 = uitab(tabgp,'Title','Type of Signal');
tab2 = uitab(tabgp,'Title','Plot Options');
```

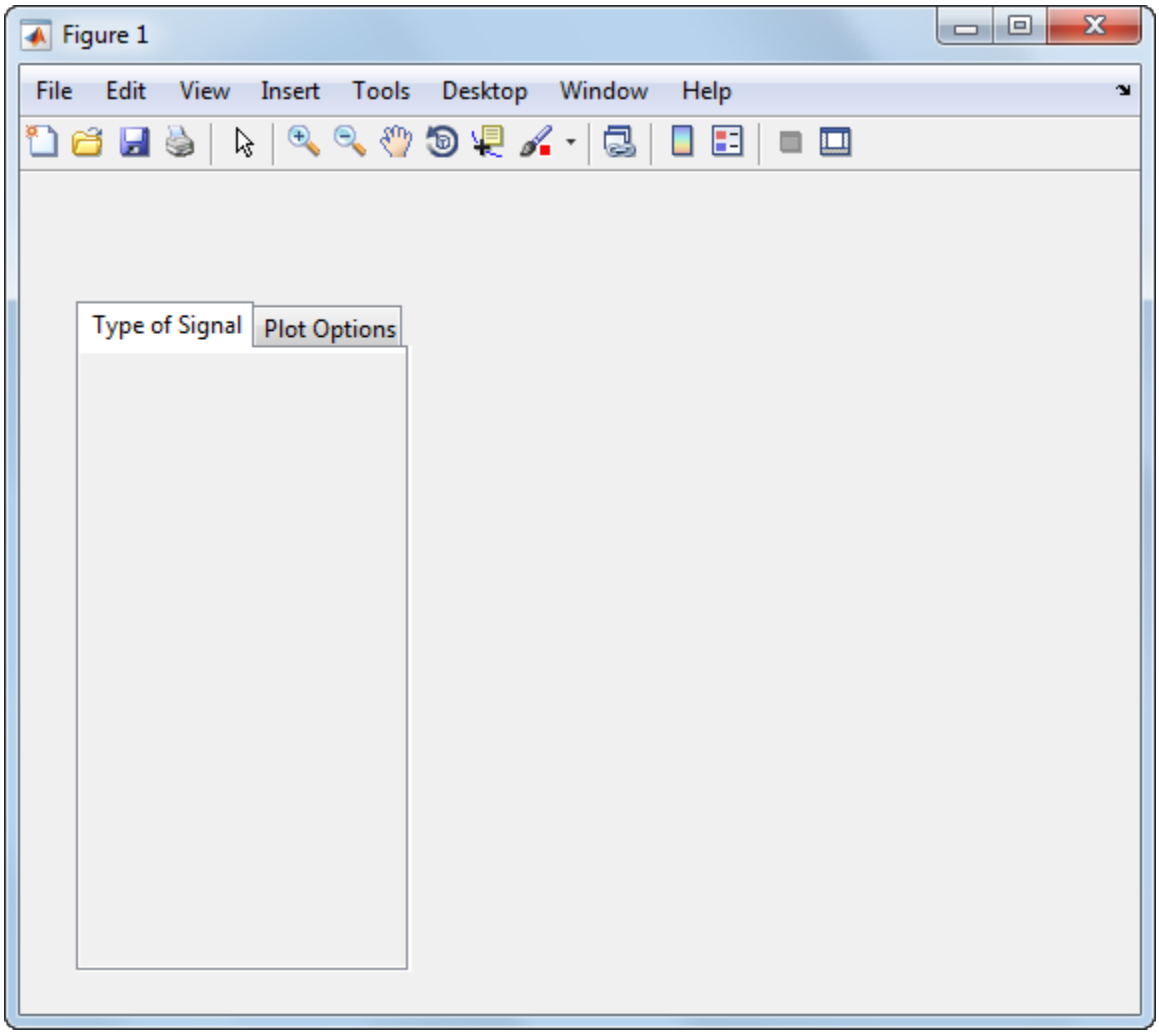

Get the title of the first uitab.

```
tab1.Title
```

```
ans =
```

```
Type of Signal
```

Create Two Tabs in Tab Group within UI Figure

Create a UI figure containing a tab group and two tabs.

```
fig = uiffigure;
tabgp = uitabgroup(fig,'Position',[100,100,250,210]);
tab1 = uitab(tabgp,'Title','Type of Signal');
tab2 = uitab(tabgp,'Title','Plot Options');
```

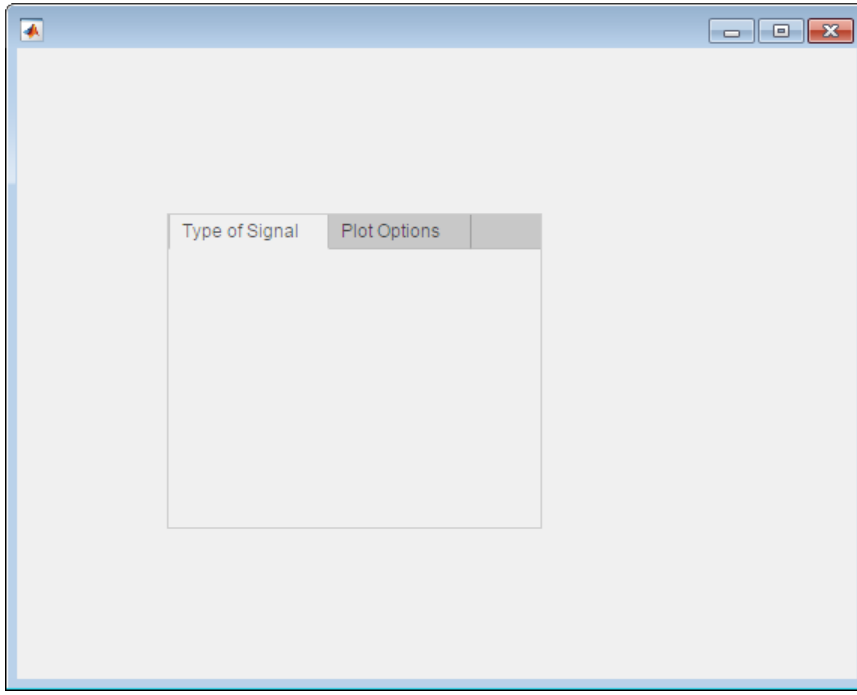

Get the title of the first tab.

```
tab1.Title
```

```
ans =
```

Type of Signal

Input Arguments

parent — Parent object of tab
TabGroup object

Parent object of tab, specified as a TabGroup object. The parent can be a TabGroup within a Figure created with the figure function or the uifigure function.

Name-Value Pair Arguments

Specify optional comma-separated pairs of Name,Value arguments. Name is the argument name and Value is the corresponding value. Name must appear inside single quotes (' '). You can specify several name and value pair arguments in any order as Name1,Value1,...,NameN,ValueN.

Example: 'Title','Options' specifies that the tab title is Options.

- For information on Name-Value pair arguments you can use with tabs in traditional figure windows, see Uitab Properties.
- For information on Name-Value pair arguments you can use with tabs in UI figure windows, see Tab Properties

Definitions

traditional figure

A traditional figure is one that MATLAB creates when you use GUIDE or the figure function. For more information on the difference between traditional figures and UI figures, see “Graphics Support in App Designer”.

UI figure

A UI figure is one that MATLAB creates when you use App Designer or the uifigure function. For more information on the difference between traditional figures and UI figures, see “Graphics Support in App Designer”.

See Also

See Also

Functions
`figure` | `uifigure` | `uitabgroup`

Properties
Tab Properties | TabGroup Properties | Uitab Properties | Uitabgroup Properties

Introduced in R2014b

Uitab Properties

Control appearance and behavior of tabbed panel

Description

Uitabs are containers for grouping for grouping UI components together with a tabbed label. The `uitab` function creates a uitab in a figure and sets any required properties before displaying it. By changing `Tab` property values, you can modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
t = uitab;
bgcolor = t.BackgroundColor;
t.BackgroundColor = [.5 .5 .5];
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`BackgroundColor` — Uitab background color

`[.94 .94 .94]` (default) | RGB triplet | short name | long name

Uitab background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the uitab.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`

Long Name	Short Name	RGB Triplet
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Data Types: double | char

ForegroundColor — Uitab title color
[0 0 0] (default) | RGB triplet | short name | long name

Uitab title color, specified as an RGB triplet, short name, or long name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0 0 1]

Example: 'b'

Example: 'blue'

Location and Size

`Position` — Location and size of uitab

`[left bottom width height]`

This property is read-only.

Location and size of the uitab, returned as a vector of the form `[left bottom width height]`. This table describes each element in the vector.

Value	Description
`left`	Distance from the inner left edge of the parent tab group to the inner left edge of the uitab.
`bottom`	Distance from the inner bottom edge of the parent tab group to the inner bottom edge of the uitab.
`width`	Distance between the right and left inner edges of the uitab.
`height`	Distance between the top and bottom inner edges of the uitab.

All measurements exclude the tab label and are in units specified by the `Units` property.

Note: These are some important points to consider when using the `Position` property:

- `Position` values are affected by the length of the tab title and the parent tab group's TabLocation property.
- `Position` values are relative to the parent tab group's *drawable area*. The drawable area of a tab group is the area inside its borders.

`OuterPosition` — Location and size of uitab

`[left bottom width height]`

This property is read-only.

Location and size of the uitab, returned as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `InnerPosition` property values.

`InnerPosition` — Location and size of uitab
`[left bottom width height]`

This property is read-only.

Location and size of uitab, returned as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `OuterPosition` property values.

`Units` — Units of measurement
`'normalized'` (default) | `'pixels'` | `'inches'` | `'centimeters'` | `'points'` | `'characters'`

Units of measurement, specified one of the values from this table.

Units Value	Description
`'normalized'`	These units are normalized with respect to the parent container. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'points'`	Points. One point equals 1/72nd of an inch.

Units Value	Description
`'characters'`	These units are based on the default uicontrol font of the graphics root object: • Character width = width of the letter `x`. • Character height = distance between the baselines of two lines of text. To access the default uicontrol font, use `get(groot,'defaultuicontrolFontName')` or `set(groot,'defaultuicontrolFontName')`.

MATLAB uses these units to display the location and size values in the `Position` property.

MATLAB measures all units from the lower left corner of the parent object.

If you change the value of the `Units` property, it is good practice to return it to its default value after completing your computation to avoid affecting other functions that assume the `Units` property is set to the default value.

`SizeChangedFcn` — Size change callback function

`''` (default) | function handle | cell array | character vector

Size change callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Define this callback to customize the app layout when the size of this container changes (e.g., when the user resizes the window).

The `SizeChangedFcn` callback executes when:

- This container becomes visible for the first time.

- This container is visible while its size changes.
- This container becomes visible for the first time after its size changes. This situation occurs when the size changes while the container is invisible, and then it becomes visible later.

Other important points to consider when defining a `SizeChangedFcn` callback:

- Consider delaying the display of this container until after all the variables that the `SizeChangedFcn` uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the container, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- If your app contains nested containers, they resize from the inside out.
- To access the container that is resizing from within the `SizeChangedFcn`, refer to the source object (the first input argument in the callback) or use the `gcbo` function.

Tip: As an easy alternative to specifying a `SizeChangedFcn` callback, you can set the `Units` property of all the objects you put inside a container to `'normalized'`. Doing so makes those components scale proportionally with the container.

See "Lay Out a UI Programmatically" for more information about managing layouts with `SizeChangedFcn` callbacks.

Text

`Title` — Uitab title

character vector

Uitab title, specified as a character vector.

MATLAB does not interpret a vertical slash (`'|'`) character as a line break, it displays as a vertical slash in the uitab title.

If you want to specify a Unicode character, pass the Unicode decimal code to the `char` function. For example, `['Multiples of ' char(960)]` displays as `Multiples of` π.

Example: `'Options'`

Example: `['Multiples of ' char(960)]`

Interactive Control

`ButtonDownFcn` — Button-press callback function

`''` (default) | function handle | cell array | character vector

Button-press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `ButtonDownFcn` callback is a function that executes when the user clicks a mouse button on the uitab.

`UIContextMenu` — Uitab context menu

empty `GraphicsPlaceholder` array (default) | uicontextmenu object

Uitab context menu, specified as a uicontextmenu object. Use this property to display a context menu when the user right-clicks on the uitab. Create the context menu using the `uicontextmenu` function.

`TooltipString` — Tooltip text

character vector

Tooltip text, specified as a character vector. When the user hovers the mouse pointer over the uitab and leaves it there, the tooltip displays.

Example: `'Some text'`

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

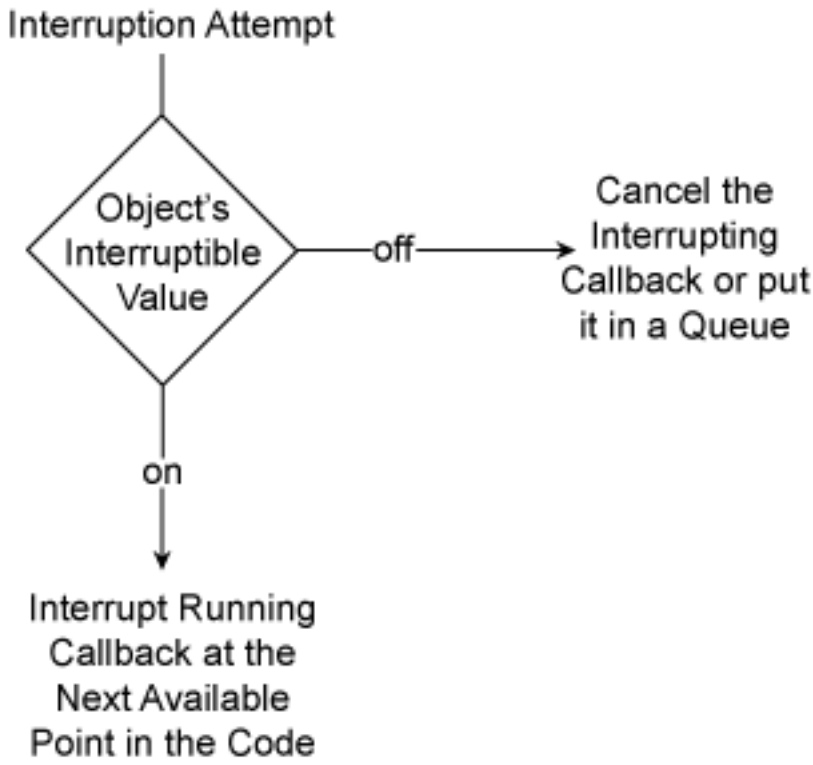

If a uitab callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See "Interrupt Callback Execution" for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uitab creation function

function handle | cell array | character vector

Uitab creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uitab. MATLAB initializes all uitab property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uitab that is being created.

Setting the `CreateFcn` property on an existing uitab has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uitab object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uitab deletion function

function handle | cell array | character vector

Uitab deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uitab (for example, when the end user deletes the figure). MATLAB executes the

`DeleteFcn` callback before destroying the properties of the uitab. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uitab that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uitab'`

This property is read-only.

Type of graphics object, returned as `'uitab'`.

`Tag` — Uitab identifier

`''` (default) | character vector

Uitab identifier, specified as a character vector. This value to serves as an identifier for the uitab. When you need access to the uitab elsewhere in your code, you can use the `findobj` function to search for the uitab based on the `Tag` value.

Example: `'tab1'`

Data Types: `char`

`UserData` — Data to associate with the uitab object

empty array (default) | array

Data to associate with the uitab object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See "Share Data Among Callbacks" for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Uitab parent

uitabgroup

Uitab parent, specified as a uitabgroup. You can move a uitab to a different uitabgroup by setting this property to the handle of the target uitabgroup.

`Children` — Children of uitab

empty `GraphicsPlaceholder` array (default) | 1-D array of component objects

Children of uitab, returned as an empty `GraphicsPlaceholder` or a 1-D array of UI component objects. The children of uitab can be axes, uipanels, uibuttongroups, and uicontrols.

You cannot add or remove children using the `Children` property of the uitab. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the front-to-back order (stacking order) of the components on the screen.

To add a child to this list, set the `Parent` property of the child component to be the uitab object.

Objects with the `HandleVisibility` property set to `'off'` do not list in the `Children` property. For more information, see the `HandleVisibility` property description.

`HandleVisibility` — Visibility of Uitab handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uitab handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uitab handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties. These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object's handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uitab handle is always visible.
`'callback'`	The uitab handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uitab at the command-line, but allows callback functions to access it.

HandleVisibility Value	Description
`'off'`	The uitab handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

See Also

See Also

`uitab` | `uitabgroup`

Topics

"Access Property Values"
"Default Property Values"

uitabgroup

Create container for tabbed panels

Syntax

```
tg = uitabgroup
```

```
tg = uitabgroup(parent)
tg = uitabgroup( ___ ,Name,Value)
```

Description

`tg = uitabgroup` creates a tab group in the current "traditional figure" on page 1-12018 and returns the tab group object. If no traditional figure exists, then MATLAB creates one and places the tab group in it. Tab groups are tab containers. They allow you to group tabs together, identify the currently selected tab, and detect when the app user selects a different tab.

`tg = uitabgroup(parent)` creates a tab group and specifies the parent object for the tab group.

`tg = uitabgroup( ___ ,Name,Value)` specifies tab group property values using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Examples

Create Tab Group Within a Traditional Figure

Create a figure containing a uitabgroup and two uitabs.

```
f = figure;
tabgp = uitabgroup(f,'Position',[.05 .05 .3 .8]);
tab1 = uitab(tabgp,'Title','Type of Signal');
tab2 = uitab(tabgp,'Title','Plot Options');
```

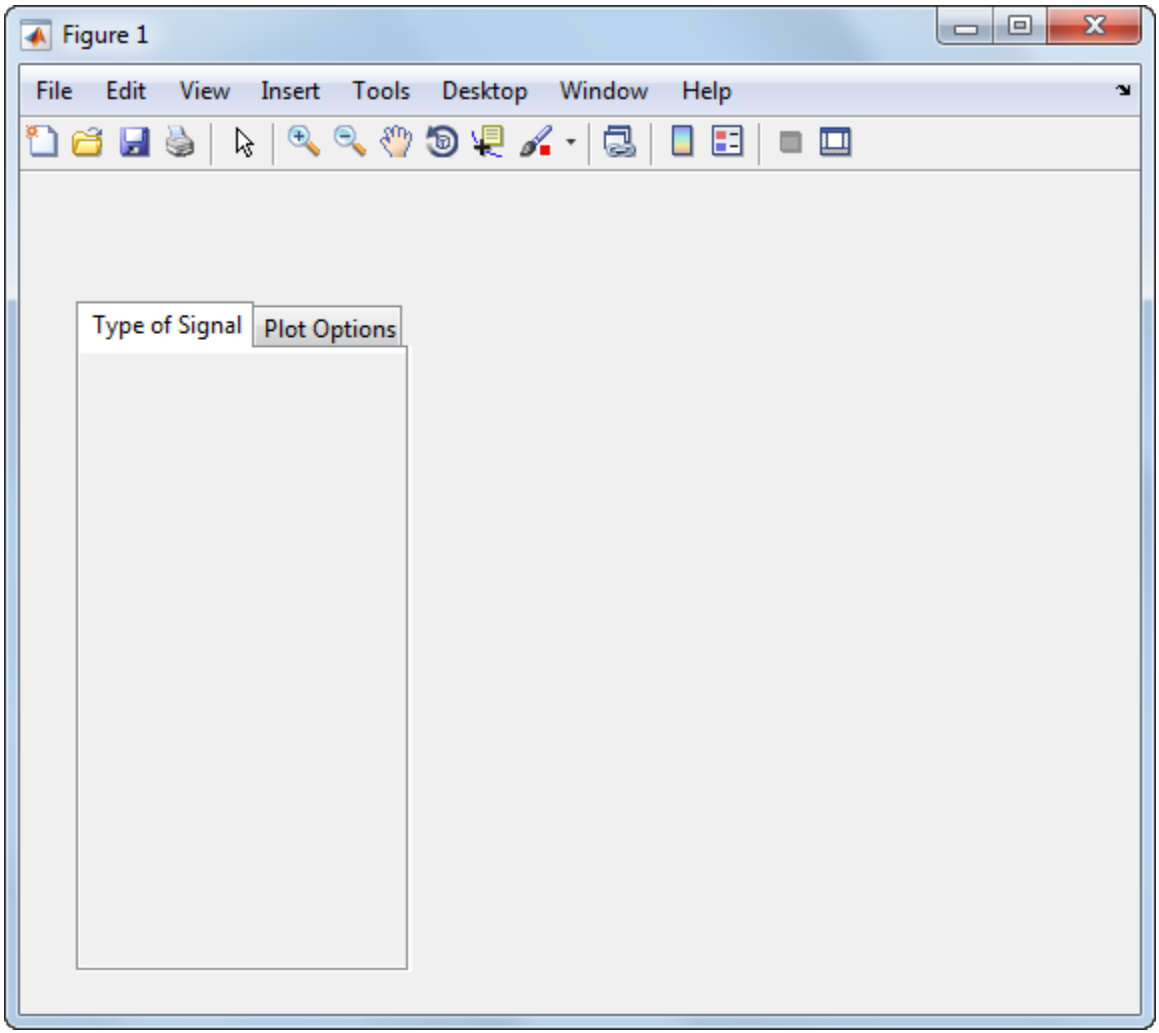

Get the currently selected uitab.

```
currenttab = tabgp.SelectedTab
```

```
currenttab =

  Tab (Type of Signal) with properties:
```

```
              Title: 'Type of Signal'
    BackgroundColor: [0.9400 0.9400 0.9400]
           Position: [0.0119 0.0089 0.9702 0.9107]
              Units: 'normalized'
```

Create Tab Group Within a UI Figure

Create a UI figure window containing a tab group that contains two tabs.

```
fig = uifigure;
tabgp = uitabgroup(fig,'Position',[100,100,250,210]);
tab1 = uitab(tabgp,'Title','Type of Signal');
tab2 = uitab(tabgp,'Title','Plot Options');
```

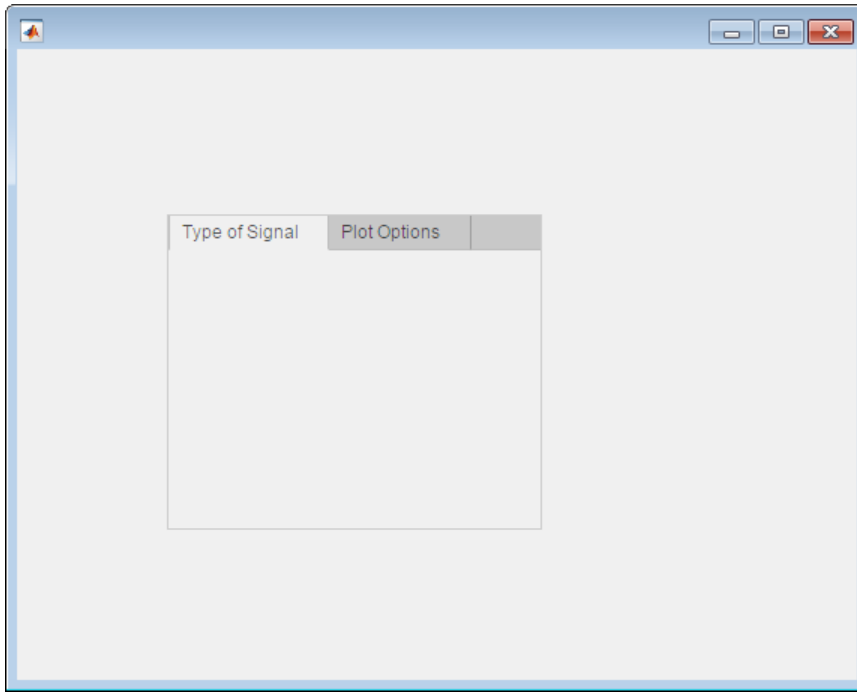

Get the currently selected tab.

```
currenttab = tabgp.SelectedTab
```

```
currenttab =
```

```
  Tab (Type of Signal) with properties:

              Title: 'Type of Signal'
    BackgroundColor: [0.9400 0.9400 0.9400]
           Position: [1 1 250 210]
              Units: 'pixels'
```

Input Arguments

`parent` — Parent object of tab group

`Figure` object | `Panel` object | `Tab` object | `ButtonGroup` group object

Parent object of tab group, specified as a `Figure`, `Panel`, `Tab` object or `ButtonGroup` object. The parent object can be within a traditional figure or a UI figure.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'TabLocation','bottom'` specifies that the tab labels are at the bottom of the tab group.

- For information on Name-Value pair arguments you can use with tab groups in traditional figure windows, see Uitabgroup Properties.
- For information on Name-Value pair arguments you can use with tab groups in UI figure windows, see TabGroup Properties.

Definitions

traditional figure

A traditional figure is one that MATLAB creates when you use GUIDE or the `figure` function. For more information on the difference between traditional figures and UI figures, see “Graphics Support in App Designer”.

UI figure

A UI figure is one that MATLAB creates when you use App Designer or the `uifigure` function. For more information on the difference between traditional figures and UI figures, see “Graphics Support in App Designer”.

See Also

See Also

`appdesigner` | `figure` | TabGroup Properties | `uifigure` | `uitab` | Uitabgroup Properties

Introduced in R2014b

Uitabgroup Properties

Control appearance and behavior of tabbed panel container

Description

Uitabgroups are uitab containers that allow to you identify the currently selected uitab and detect when the user selects a different uitab. Use properties of the uitabgroup to modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
g = uitabgroup;
pos = g.Position;
g.Position = [.1 .1 .8 .8];
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Visible` — Uitabgroup visibility
`'on'` (default) | `'off'`

Uitabgroup handle visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the uitabgroup displays on the screen. If the `Visible` property of a uitabgroup is set to `'off'`, the entire uitabgroup is invisible, but you can still specify and access its properties.

Changing the size of an invisible uitabgroup triggers the `SizeChangedFcn` callback if and when the uitabgroup becomes visible.

Note Changing the `Visible` property of a uitabgroup does *not* change the settings of the `Visible` property of its child components even though hiding the uitabgroup causes them to be hidden.

Location and Size

`TabLocation` — Tab label location
`'top'` (default) | `'bottom'` | `'left'` | `'right'`

Tab label location, specified as `'top'`, `'bottom'`, `'left'`, or `'right'`. This property specifies the location of the tab labels with respect to the uitabgroup.

`Position` — Location and size of uitabgroup
`[left bottom width height]`

Location and size of the uitabgroup, specified as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the uitabgroup
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the uitabgroup
`width`	Distance between the right and left outer edges of the uitabgroup
`height`	Distance between the top and bottom outer edges of the uitabgroup

All measurements are in units specified by the `Units` property.

Note: The `Position` values are relative to the parent container's *drawable area*. The drawable area is the area inside the borders of the container and does not include the area occupied by the title. If the parent container is a figure, then the drawable area also excludes the menu bar and tool bar.

Example: Modify One Value in the Position Vector

You can combine dot notation and array indexing when you want to change one value in the `Position` vector. For example, this code sets the width of the Uitabgroup to `.5` without changing any of the other `Position` values:

```
tg = uitabgroup;
tg.Position(3) = .5;
```

`OuterPosition` — Location and size of uitabgroup
`[left bottom width height]`

Location and size of the uitabgroup, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `InnerPosition` property values.

`InnerPosition` — Location and size of uitabgroup
`[left bottom width height]`

Location and size of the uitabgroup, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `OuterPosition` property values.

`Units` — Units of measurement
`'normalized'` (default) | `'pixels'` | `'inches'` | `'centimeters'` | `'points'` | `'characters'`

Units of measurement, specified one of the values from this table.

Units Value	Description
`'normalized'`	These units are normalized with respect to the parent container. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.
`'inches'`	Inches.

Units Value	Description
`'centimeters'`	Centimeters.
`'points'`	Points. One point equals 1/72nd of an inch.
`'characters'`	These units are based on the default uicontrol font of the graphics root object: • Character width = width of the letter `x`. • Character height = distance between the baselines of two lines of text. To access the default uicontrol font, use `get(groot,'defaultuicontrolFontName')` or `set(groot,'defaultuicontrolFontName')`.

MATLAB measures all units from the lower left corner of the parent object.

If you change the value of the `Units` property, it is good practice to return it to its default value after completing your computation to avoid affecting other functions that assume the `Units` property is set to the default value.

The order in which you specify the Units and Position properties has these effects:

- If you specify the `Units` property before the `Position` property, then MATLAB sets `Position` using the units you specified.
- If you specify the `Units` property after the `Position` property, MATLAB sets the position using the default `Units`. Then, MATLAB converts the `Position` values to the equivalent values in the units you specified.

`SizeChangedFcn` — Size change callback function

`''` (default) | function handle | cell array | character vector

Size change callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Define this callback to customize the app layout when the size of this container changes (e.g., when the user resizes the window).

The `SizeChangedFcn` callback executes when:

- This container becomes visible for the first time.
- This container is visible while its size changes.
- This container becomes visible for the first time after its size changes. This situation occurs when the size changes while the container is invisible, and then it becomes visible later.

Other important points to consider when defining a `SizeChangedFcn` callback:

- Consider delaying the display of this container until after all the variables that the `SizeChangedFcn` uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the container, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- If your app contains nested containers, they resize from the inside out.
- To access the container that is resizing from within the `SizeChangedFcn`, refer to the source object (the first input argument in the callback) or use the `gcbo` function.

Tip: As an easy alternative to specifying a `SizeChangedFcn` callback, you can set the `Units` property of all the objects you put inside a container to `'normalized'`. Doing so makes those components scale proportionally with the container.

See "Lay Out a UI Programmatically" for more information about managing layouts with `SizeChangedFcn` callbacks.

Interactive Control

`SelectionChangedFcn` — Uitab selection callback

`''` (default) | function handle | cell array | character vector

Uitab selection callback, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This callback function executes when the user selects a different tab within the uitabgroup.

If you set the `SelectionChangedFcn` property to a function handle (or cell array containing a function handle), MATLAB passes a `SelectionChangedData` object containing event data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation. For example, if the second argument in your callback is called `event`, then `event.NewValue` returns the currently selected `Tab`.

Property	Description
`OldValue`	Previously selected `Tab`, or `[]` if none was selected
`NewValue`	Currently selected `Tab`
`Source`	Component that executes the callback
`EventName`	`'SelectionChanged'`

For more information about specifying a callback property value as a function handle, cell array, or character vector, see “How to Specify Callback Property Values”.

`ButtonDownFcn` — Button-press callback function

`''` (default) | function handle | cell array | character vector

Button-press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see “How to Specify Callback Property Values”.

The `ButtonDownFcn` callback is a function that executes when the user clicks a mouse button on the uitabgroup.

`UIContextMenu` — Uitabgroup context menu

empty `GraphicsPlaceholder` array (default) | uicontextmenu object

Uitabgroup context menu, specified as a uicontextmenu object. Use this property to display a context menu when the user right-clicks on the uitabgroup. Create the context menu using the `uicontextmenu` function.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

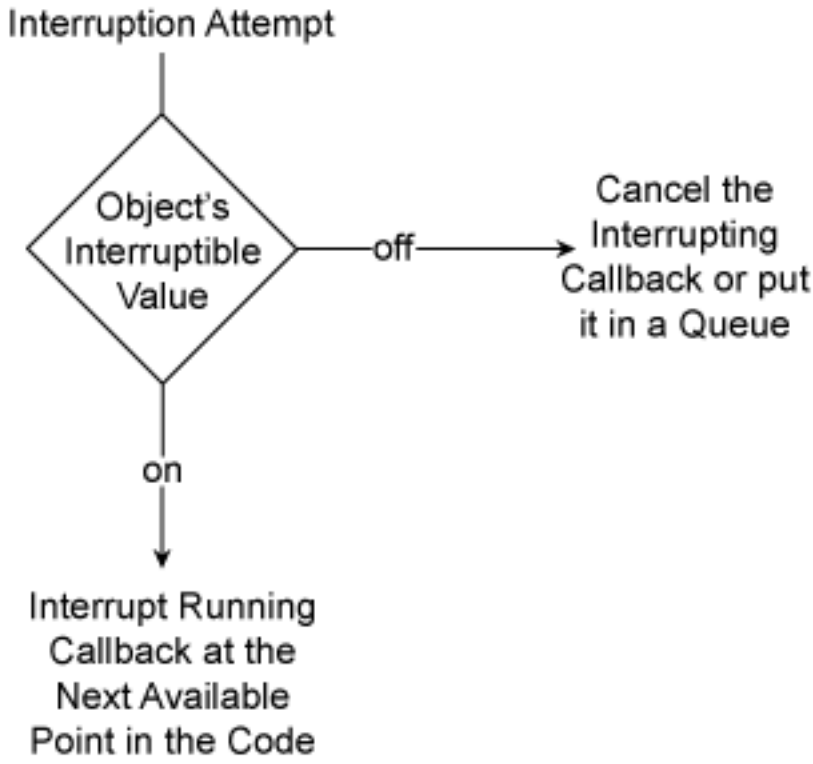

If a uitabgroup callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See "Interrupt Callback Execution" for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uitabgroup creation function

function handle | cell array | character vector

Uitabgroup creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uitabgroup. MATLAB initializes all uitabgroup property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uitabgroup that is being created.

Setting the `CreateFcn` property on an existing uitabgroup has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uitabgroup object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uitabgroup deletion function

function handle | cell array | character vector

Uitabgroup deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uitabgroup (for example, when the end user deletes the figure). MATLAB executes the `DeleteFcn` callback before destroying the properties of the uitabgroup. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uitabgroup that is being deleted.

Identifiers

`SelectedTab` — Currently selected tab

uitab object

Currently selected tab, specified as a uitab object.

Use this property to determine the currently selected uitab within a uitabgroup. You can also use this property to set the default uitab selection.

The default value of the `SelectedTab` property is the first uitab that you add to the uitabgroup.

`Type` — Type of graphics object

`'uitabgroup'`

This property is read-only.

Type of graphics object, returned as `'uitabgroup'`.

`Tag` — Uitabgroup identifier

`''` (default) | character vector

Uitabgroup identifier, specified as a character vector. This value to serves as an identifier for the uitabgroup. When you need access to the uitabgroup elsewhere in your code, you can use the `findobj` function to search for the uitabgroup based on the `Tag` value.

Example: `'tabgroup1'`

Data Types: `char`

`UserData` — Data to associate with the uitabgroup object

empty array (default) | array

Data to associate with the uitabgroup object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See "Share Data Among Callbacks" for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Uitabgroup parent

figure | uipanel | uitab

Uitabgroup parent, specified as a figure, uipanel, or uitab. You can move a uitabgroup to a different figure, uipanel, or uitab by setting this property to the handle of the target figure, uipanel, or uitab.

`Children` — Children of uitabgroup

empty `GraphicsPlaceholder` array (default) | 1-D array of component objects

Children of the uitabgroup, returned as an empty `GraphicsPlaceholder` or a 1-D array of component objects. The children of uitabgroup are uitabs.

You cannot add or remove children using the `Children` property of the uitabgroup. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the order of the tabs displayed on the screen.

To add a child to this list, set the `Parent` property of the child component to be the uitabgroup object.

Objects with the `HandleVisibility` property set to `'off'` do not list in the `Children` property. For more information, see the `HandleVisibility` property description.

`HandleVisibility` — Visibility of Uitabgroup handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uitabgroup handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uitabgroup handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties. These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object's handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uitabgroup handle is always visible.
`'callback'`	The uitabgroup handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uitabgroup at the command-line, but allows callback functions to access it.

HandleVisibility Value	Description
`'off'`	The uitabgroup handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

See Also

See Also

`uitab` | `uitabgroup`

Topics

"Access Property Values"
"Default Property Values"

uitable

Create table user interface component

Syntax

```
t = uitable
t = uitable(Name,Value)
t = uitable(parent)
t = uitable(parent,Name,Value)
```

Description

`t = uitable` creates a table user interface component in the current traditional figure and returns the table object. If there is no traditional figure available, MATLAB creates one.

`t = uitable(Name,Value)` specifies table property values using one or more `Name,Value` pair argument pairs.

`t = uitable(parent)` creates the table in the specified parent container. The parent must be one of the following containers: traditional figure, UI figure, tab, panel, or button group.

`t = uitable(parent,Name,Value)` specifies table property values using one or more `Name,Value` argument pairs.

Examples

Table in a Traditional Figure

Create a 3-by-10 table of random integers inside a traditional figure. The `Data` property specifies the values in the table, and the `Position` property specifies the location and size of the table within the figure.

```
f = figure;
```

```
t = uitable(f,'Data',randi(100,10,3),'Position',[20 20 262 204]);
```

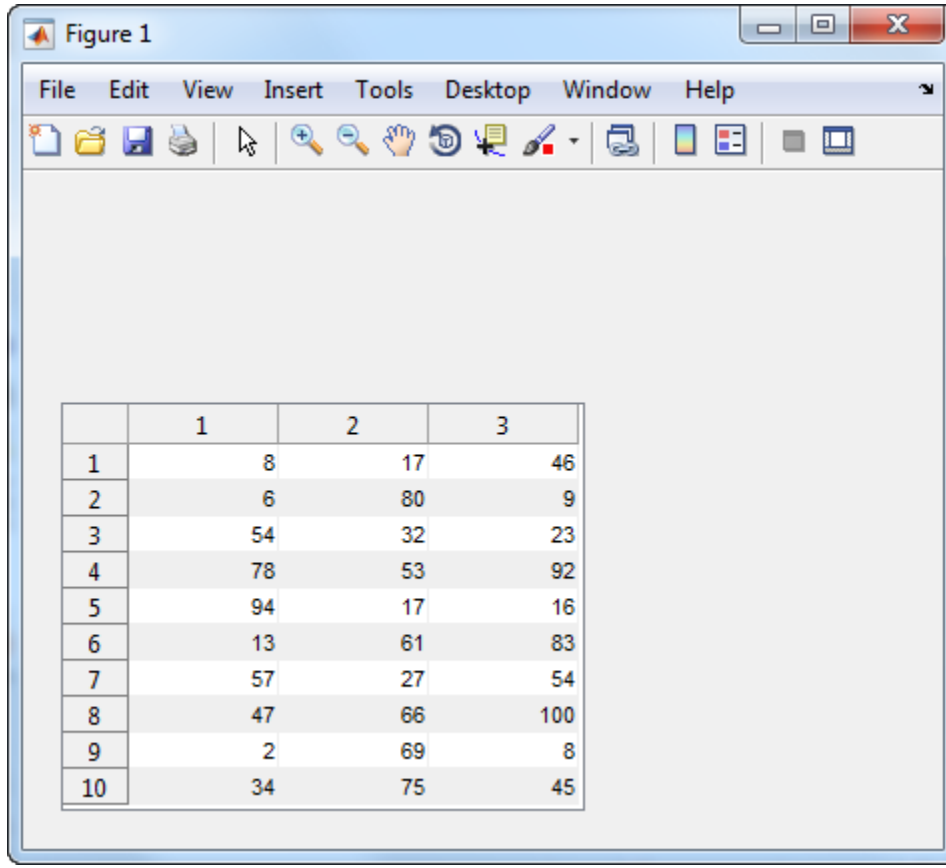

Table in a UI Figure

Create a 3-by-10 table of random integers inside a UI figure. The `Data` property specifies the values in the table, and the `Position` property specifies the location and size of the table within the figure.

```
uf = uifigure;
t = uitable(uf,'Data',randi(100,10,3),'Position',[20 20 260 204]);
```

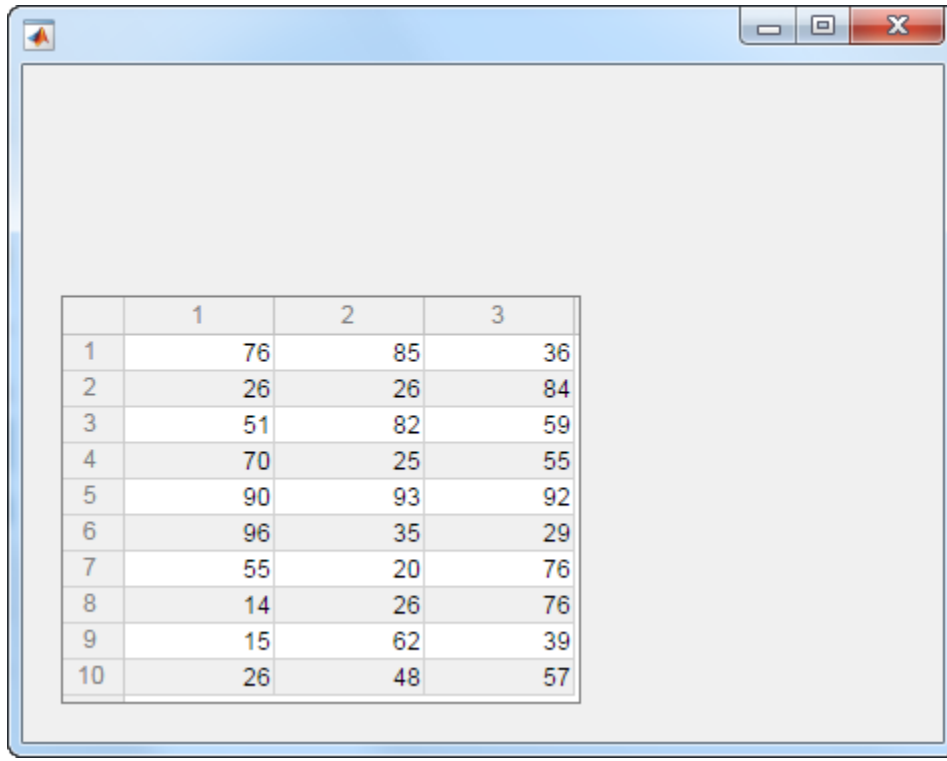

	1	2	3
1	76	85	36
2	26	26	84
3	51	82	59
4	70	25	55
5	90	93	92
6	96	35	29
7	55	20	76
8	14	26	76
9	15	62	39
10	26	48	57

Table Containing Mixed Data Types

Tables can accommodate a mixture of different data types across the columns.

Create an empty table in a UI figure.

```
f = figure;
t = uitable(f);
```

Set the `Data` property to populate the table with data that is a mixture of different types. Then set the `Position` property to adjust the location and size of the table to fit the data.

```
d = {'Male',52,true;'Male',40,true;'Female',25,false};
t.Data = d;
t.Position = [20 20 258 78];
```

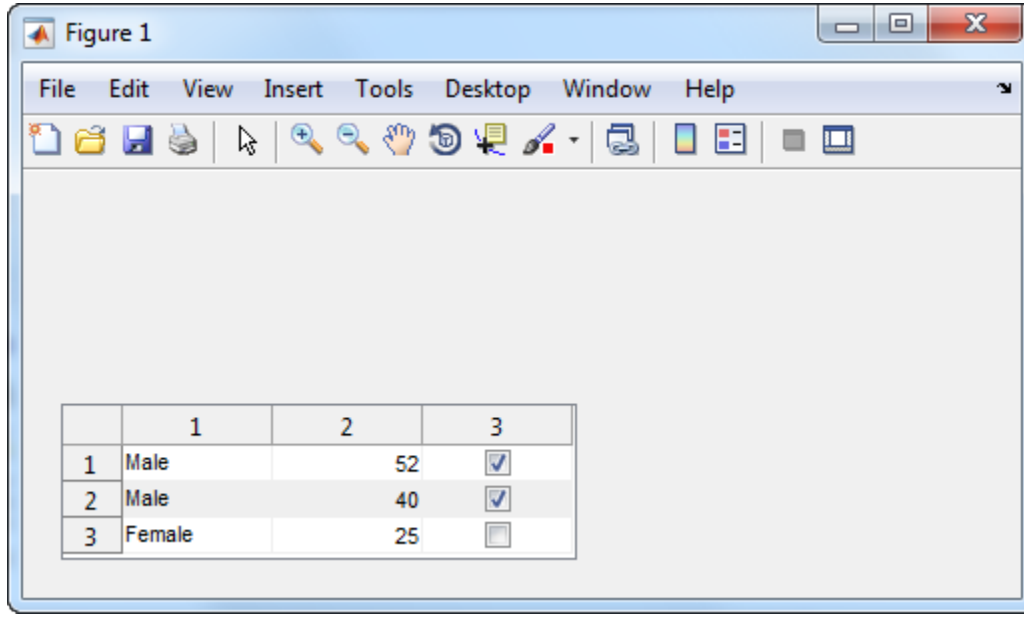

Set the `ColumnName` property to change the column headings to descriptive names. Set the `ColumnEditable` property to `true` so that users can edit the table in the UI. When a user changes a value in the UI, the table's `Data` property updates to reflect that change.

```
t.ColumnName = {'Gender','Age','Authorized'};
t.ColumnEditable = true;
```

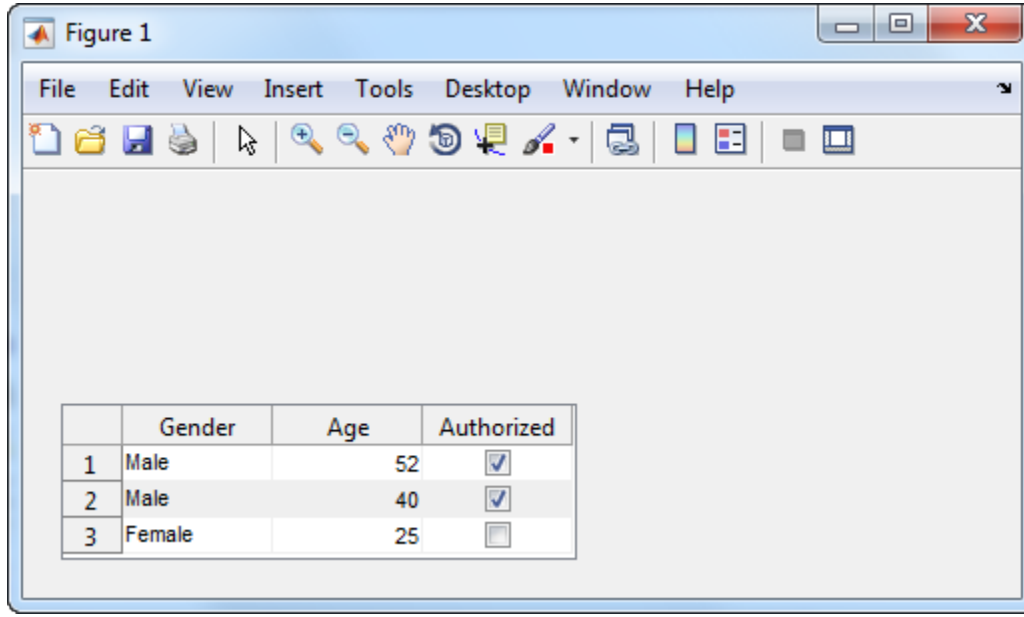

Input Arguments

`parent` — Table parent container

figure object (default) | panel object | tab object | button group object

Table parent container, specified as a figure, panel, tab, or button group object. If you do not specify a parent container, the default parent is a traditional figure.

Name-Value Pair Arguments

Example: `'Data',[1 2 3; 4 5 6]`

You can set `Table` properties using Name-Value pair arguments.

- For a list of properties you can use with tables in traditional figures, see Uitable Properties.
- For a list of properties you can use with tables in UI figures, see Table (App Designer) Properties.

Output Arguments

`t` — Table object
table object

Table object. Use `t` to set properties of the table after creating it.

Definitions

Traditional Figure

A figure that MATLAB creates when you use GUIDE or call the `figure` function.

UI Figure

A figure that MATLAB creates when you use App Designer or call the `uifigure` function. For more information on the difference between traditional figures and UI figures, see "Graphics Support in App Designer".

See Also

See Also

Properties
Table Properties | Uitable Properties

Introduced before R2006a

Uitable Properties

Control appearance and behavior of table

Description

Uitables are tables that list data in a figure. The `uitable` function creates a table and sets any required properties before displaying it. By changing uitable property values, you can modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
t = uitable('Data',[1 2 3; 4 5 6; 7 8 9]);
d = t.Data;
t.Data = d + 1;
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Visible` — Uitable visibility

`'on'` (default) | `'off'`

Uitable visibility, specified as `'on'` or `'off'`. When `Visible` is `'off'`, the uitable is not visible, but you can query and set its properties.

To make your app start faster, set the `Visible` property of all uitables that are not initially displayed to `'off'`.

`BackgroundColor` — Uitable background color

`[1 1 1; 0.94 0.94 0.94]` (default) | RGB triplet | m-by-3 matrix of RGB triplets

Uitable background color, specified as an RGB triplet or an m-by-3 matrix of RGB triplets. An RGB triplet is a row vector that specifies the intensities of the red, green, and blue components of the color. The intensities must be in the range, `[0,1]`. Color names are not valid.

Specify an m-by-3 matrix when you want the shading of the table rows to follow a repeating pattern of m different colors. Each row of the matrix must be an RGB triplet. MATLAB uses the rows of the matrix when the `RowStriping` property is

`'on'`. The table background is not striped unless both `RowStriping` is `'on'` and `BackgroundColor` is an m-by-3 matrix.

Example: `t = uitable('Data',rand(10,3),'BackgroundColor',[0.85 0.85 1])`

Example: `t = uitable('Data',rand(10,3),'BackgroundColor',[1 1 1 ;0.85 0.85 1])`

The following table lists the RGB triplets for certain colors.

Color	RGB Triplet
Yellow	`[1 1 0]`
Magenta	`[1 0 1]`
Cyan	`[0 1 1]`
Red	`[1 0 0]`
Green	`[0 1 0]`
Blue	`[0 0 1]`
White	`[1 1 1]`
Black	`[0 0 0]`

`ForegroundColor` — Cell text color

`[0 0 0]` (default) | RGB triplet | short name | long name

Cell text color, specified as an RGB triplet, short name, or long name. The color you specify sets the text color for all cells.

Example: `t = uitable('Data',rand(10,3),'ForegroundColor',[0 0 1])`

Example: `t = uitable('Data',rand(10,3),'ForegroundColor','b')`

Example: `t = uitable('Data',rand(10,3),'ForegroundColor','blue')`

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Table Data

`Data` — Table data

numeric array | logical array | cell array

Table data, specified as a numeric array, logical array, or cell array. The table data can be any numeric type, `logical`, or `char`. Use a cell array to specify a mixture of different data types.

Table data is displayed in the format specified by the `ColumnFormat` property. If there is a mismatch between the data type of the table data and the value of the `ColumnFormat` property, MATLAB converts the data or displays a warning. See the `ColumnFormat` property description for more information.

To prevent warnings that might occur when users enter invalid data, write a `CellEditCallback` function to convert the data to the appropriate type.

If the number of rows in the `Data` property array does not match the number of elements in the `RowName` array, then the number of rows in the resulting table is the larger of the two values. The same is true when the `ColumnName` property does not match the number of columns in the `Data` property array.

Example: `t = uitable('Data',rand(10,3))`

Example: `t = uitable('Data',{'blue' 5 true; 'orange' 25 false})`

Table Layout

`RowName` — Row heading names

`'numbered'` (default) | n-by-1 cell array of character vectors | empty cell array (`{}`) | empty matrix (`[]`)

Row heading names, specified as one of these values:

- `'numbered'` — The row headings are sequential numbers that start at `1`.
- Cell array — Each element of the cell array becomes the name of a row. Row names are restricted to one line of text. If you specify a 1-by-n cell array, MATLAB stores and returns the value as a n-by-1 cell array.
- Empty cell array (`{}`) — The table has no row headings.
- Empty matrix (`[]`) — The table has no row headings

If the number of rows in the `Data` property array does not match the number of elements in the `RowName` array, then the number of rows in the resulting table is the larger of the two values.

Example: `t = uitable('RowName',{'Name';'Number'},'Data',{'Bob';5})`

Example: `t = uitable('RowName',{'Name';[]},'Data',{'Bob';5})`

`ColumnName` — Column heading names

`'numbered'` (default) | n-by-1 cell array of character vectors | empty cell array (`{}`) | empty matrix (`[]`)

Column heading names, specified as one of these values:

- `'numbered'` — The column headings are sequential numbers that start at `1`.
- Cell array — Each element of the cell array becomes the name of a column. If you specify a 1-by-n cell array, MATLAB stores and returns the value as a n-by-1 cell array. Specify a multiline column name by including a vertical slash (`|`) in the column name. For example, the value, `'Telephone|Number'`, produces a column heading with a newline character between the words, “Telephone” and “Number”.
- Empty cell array (`{}`) — The table has no column headings.
- Empty matrix (`[]`) — The table has no column headings

If the number of columns in the `Data` property array does not match the number of elements in the `ColumnName` array, then the number of columns in the resulting table is the larger of the two values.

Example: `t = uitable('ColumnName',{'Name'; 'Number'},'Data',{'Bob' 5})`

Example: `t = uitable('ColumnName',{'Name'; []},'Data',{'Bob' 5})`

Example: `t = uitable('ColumnName',{'Name'; 'Telephone|Number'},'Data',{'Bob','555-1212'})`

`ColumnWidth` — Width of table columns

`'auto'` (default) | 1-by-n cell array

Width of table columns, specified as `'auto'` or as a 1-by-n cell array.

Each column in the cell array corresponds to a column in the table. The values are in pixel units. If you specify `'auto'`, then MATLAB calculates the width of the column automatically using several factors, one of which is the `ColumnName` property value.

You can combine fixed column widths and `'auto'` column widths in a cell array, or you can specify a single value of `'auto'` to make all column widths automatic.

Selecting **Auto Width** in the Table Property Editor has the same effect as setting the `ColumnWidth` property to `'auto'`.

Example: `t = uitable('ColumnWidth','auto','Data',[1 2 3; 4 5 6])`

Example: `t = uitable('ColumnWidth',{64 60 40},'Data',[1 2 3; 4 5 6])`

Example: `t = uitable('ColumnWidth',{64 'auto' 40},'Data',[1 2 3; 4 5 6])`

`ColumnFormat` — Cell display format

empty cell array ({}) (default) | 1-by-n cell array of character vectors

Cell display format, specified as an empty cell array or a 1-by-n cell array of character vectors.

This property determines how the data in each column displays, and the constraints for editing that data in the UI. The elements of the cell array correspond to columns in the `Data` property array. If you do not want to specify a display format for a particular column, specify `[]` for that column. If you do not specify a format for a column, MATLAB determines the default display by the data type of the data in the cell.

Elements of the cell array must be one of the values described in the following table.

Cell Format Value	Description
`'char'`	Display a left-justified values

Cell Format Value	Description
	To edit a cell, the user types text to replace the existing value. If an element in the `Data` property array is logical, then `true` or `false` appears in the table.
`'logical'`	Display check boxes. To edit a cell, the user selects or clears the check box. Then, MATLAB sets the corresponding `Data` value to `true` or `false`. The `ColumnEditable` property value must be `true` to allow users to select or deselect the check boxes. Initially, a check box is selected when the corresponding `Data` value is `true`. The corresponding values in the `Data` property array must be of type `logical` to ensure the data displays correctly in the table.
`'numeric'`	Display a right-justified value equivalent to the Command Window display for numeric data. If an element in the `Data` property array is logical, then `1` or `0` appears in the table. If an element in the `Data` property array is not numeric and not logical, then `NaN` appears in the table. To edit a cell, the user can enter any text. If a user enters text that represents a constant, such as `pi`, you can code the `CellEditCallback` function to convert the value to the numeric equivalent. In this case, MATLAB attempts to convert the user-entered text to a numeric value and stores it in the `Data` property. Then, the `CellEditCallback` function executes. See the `CellEditCallback` description for an example.

Cell Format Value	Description
A 1-by-n cell array of character vectors, such as `{'one' 'two' 'three'}`	Display a pop-up menu. To edit a cell, the user selects an item from the pop-up menu. MATLAB sets the corresponding `Data` property array value to the selected menu item. The `ColumnEditable` property value must be `true` to allow users to select items in the pop-up menu.
A format name accepted by the `format` function, such as: `'short'` or `'long'`	Display the `Data` property values using the specified format.

Effect of Pop-Up Menu ColumnFormat and Various Data Types

If the `ColumnFormat` value defines a pop-up menu, the initial `Data` value does not have to be one of the options in that menu. The initial `Data` value appears until the user makes a different selection.

For instance, suppose the `Data` property value for a given column is `'Choose'` for all rows, and the `ColumnFormat` value specifies a pop-up menu with the choices of `'group 1'` and `'group 2'`. When MATLAB creates the table, those table cells display `'Choose'` until the user selects an item in the pop-up menu:

```
f = figure;
myData = {'Andrew' 31 'Male' 'Choose'; ...
          'Bob' 41 'Male' 'Choose';  ...
          'Anne' 20 'Female' 'Choose';};
t = uitable('Parent', f,...
            'Position', [25 25 334 78],...
            'ColumnFormat',({[] [] [] {'group 1' 'group 2'}}),...
            'ColumnEditable', true,...
            'Data', myData);
```

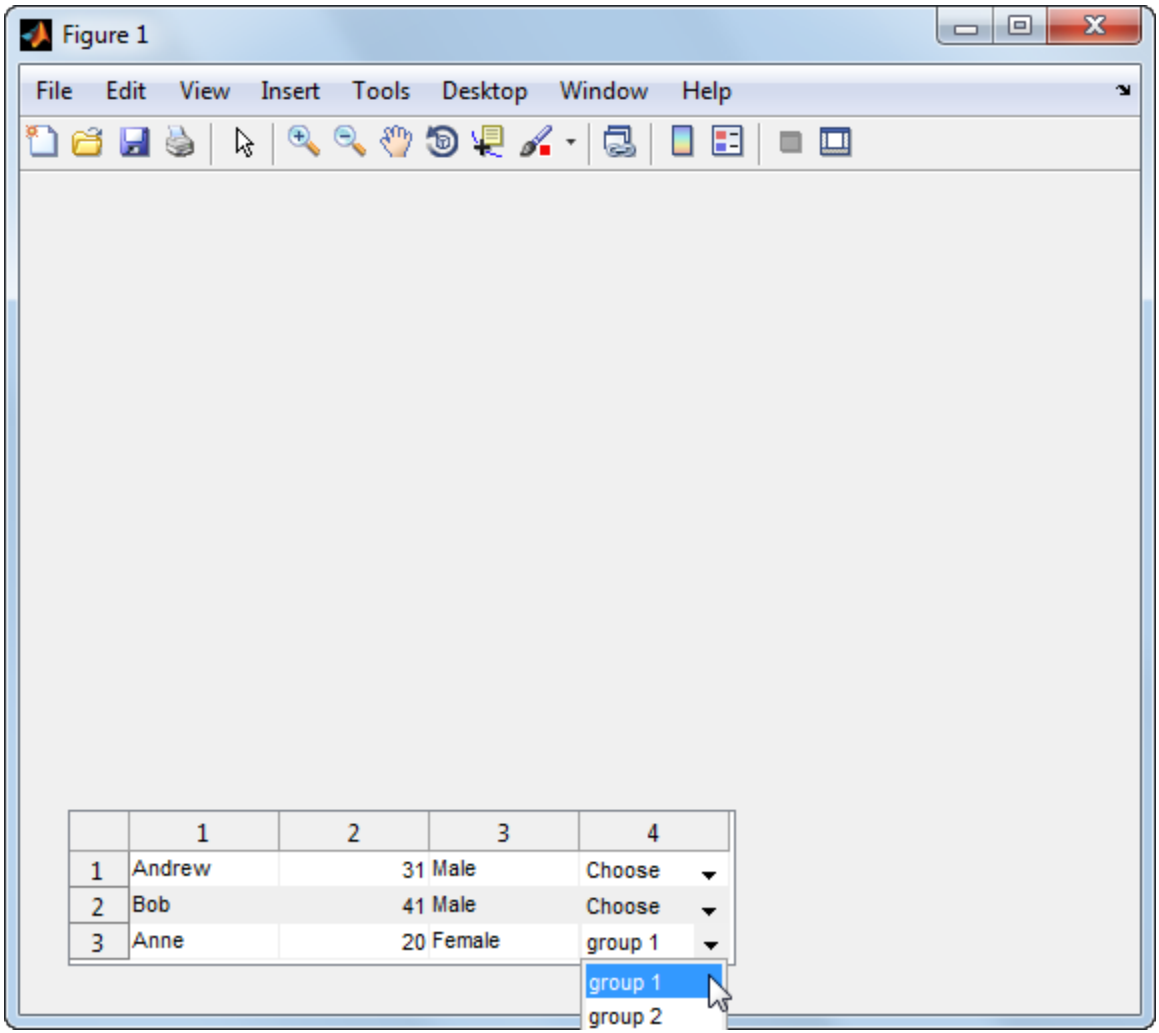

Data Display of Editable Columns

This table describes how various data types display with specific `ColumnFormat` values.

	ColumnFormat

		`'numeric'`	`'char'`	`'logical'`
Data Type of Data Array Value	Any numeric type	Table displays number as-is.	MATLAB converts the value to text and displays it left-justified in the table. If MATLAB cannot convert the value, then `NaN` displays.	Not recommended. MATLAB might return a warning when the user edits the cell, unless you define a `CellEditCallback` function.
	`char`	Table displays the value right-justified, as if it is a number.	Table displays the value as-is.	Not recommended. MATLAB might return a warning when the user edits the cell, unless you define a `CellEditCallback` function.
	`logical`	Table displays logical values as numbers. MATLAB might return a warning when the user edits the cell, unless you define a `CellEditCallback` function.	Table displays logical value as left-justified `'true'` or `'false'`. MATLAB might return a warning when the user edits the cell, unless you define a `CellEditCallback` function.	Table displays logical values as check boxes.

For example, in the following table, the first column (X-Data) is left justified because the `ColumnFormat` value for that column is `'char'`.

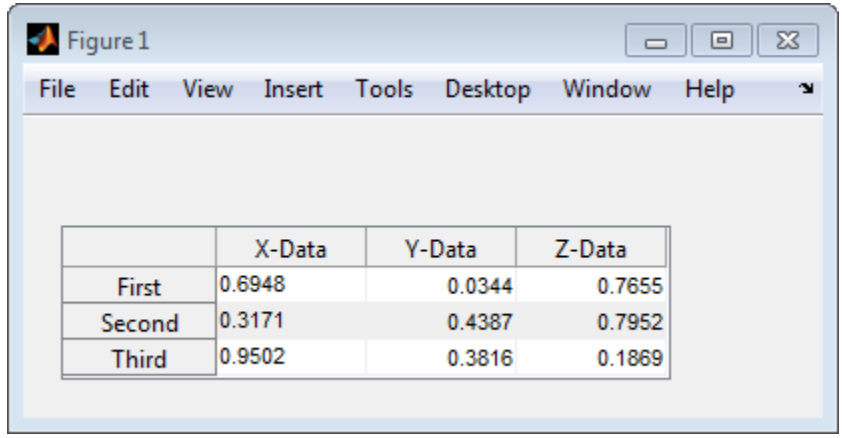

`RowStriping` — Alternate row shading

`'on'` (default) | `'off'`

Alternate row shading, specified as `'on'` or `'off'`. This property controls the shading pattern of the table rows.

When the `RowStriping` value is set to `'on'`, the `BackgroundColor` matrix specifies the row colors to display in a repeating pattern. If the `BackgroundColor` matrix has only one row, then the shading is the same in all table rows.

When `RowStriping` is set to `'off'`, then the first color in the `BackgroundColor` matrix defines the shading for all rows in the table.

Location and Size

`Position` — Location and size of uitable

`[left bottom width height]`

Location and size of the uitable, specified as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the uitable

Element	Description
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the uitable
`width`	Distance between the right and left outer edges of the uitable
`height`	Distance between the top and bottom outer edges of the uitable

All measurements are in units specified by the `Units` property.

Note: The `Position` values are relative to the parent container's *drawable area*. The drawable area is the area inside the borders of the container and does not include the area occupied by the title. If the parent container is a figure, then the drawable area also excludes the menu bar and tool bar.

Use the `Extent` property to determine proper sizing for a uitable with respect to the table data. Set the `width` and `height` of `Position` property to the width and height of the `Extent` property. Be aware that if the table has large extents, doing this can cause the table to extend beyond the right or top edge of its parent container.

Example: Set Width and Height to Accommodate Data Size

You can combine dot notation and array indexing when you want to change one or two consecutive values in the `Position` vector. For example, this code sets the width and height of the uitable to match the `Extent` of the table:

```
t = uitable('Data',rand(10,3));
t.Position(3:4) = t.Extent(3:4);
```

`OuterPosition` — Location and size of uitable

`[left bottom width height]`

Location and size of the uitable, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `InnerPosition` property values.

`InnerPosition` — Location and size of uitable

`[left bottom width height]`

Location and size of the uitable, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `OuterPosition` property values.

`Units` — Units of measurement

`'pixels'` (default) | `'normalized'` | `'inches'` | `'centimeters'` | `'points'` | `'characters'`

Units of measurement, specified one of the values from this table.

Units Value	Description
`'pixels'` (default)	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.
`'normalized'`	These units are normalized with respect to the parent container. The lower-left corner of the container maps to `(0,0)` and the upper-right corner maps to `(1,1)`.
`'inches'`	Inches.
`'centimeters'`	Centimeters.
`'points'`	Points. One point equals 1/72nd of an inch.

Units Value	Description
`'characters'`	These units are based on the default uicontrol font of the graphics root object: • Character width = width of the letter `x`. • Character height = distance between the baselines of two lines of text. To access the default uicontrol font, use `get(groot,'defaultuicontrolFontName')` or `set(groot,'defaultuicontrolFontName')`.

MATLAB measures all units from the lower left corner of the parent object.

This property affects the `Position` property. If you change the `Units` property, consider returning its value to the default value after completing your computation to avoid affecting other functions that assume the default value.

The order in which you specify the `Units` and `Position` properties has these effects:

- If you specify the `Units` before the `Position` property, then MATLAB sets `Position` using the units you specify.
- If you specify the `Units` property after the `Position` property, MATLAB sets the position using the default `Units`. Then, MATLAB converts the `Position` value to the equivalent value in the units you specify.

`Extent` — Size of uitable rectangle

four-element row vector

This property is read-only.

Size of the uitable rectangle, returned as a four-element row vector. The first two elements of the vector are always zero. The third and fourth elements are the width and height of the rectangle containing the uitable, respectively. All measurements are in units specified by the `Units` property.

MATLAB determines the size of the rectangle based on the current `Data`, `RowName` and `ColumnName` property values. MATLAB estimates the width and height values using the column and row widths. The estimated extent can be larger than the figure.

Consider using the `Extent` property value when specifying the width and height values of the uitable `Position` property.

Font Style

`FontName` — Font for cell content

system supported font name | `'FixedWidth'`

Font for cell content, specified as a system-supported font name or `'FixedWidth'`. The default font depends on the specific operating system and locale.

Example: `t = uitable('Data',rand(10,3),'FontName','Arial')`

To use a fixed-width font that looks good in any locale, specify 'FixedWidth'. The actual fixed-width font used depends on the FixedWidthFontName property of the root object. Changing the `FixedWidthFontName` property causes an immediate update of the display to use the new font.

`FontSize` — Font size

positive number

Font size, specified as a positive number. MATLAB uses the units specified by `FontUnits`. The default size is system-dependent. If you set `FontUnits` to `'normalized'`, then the `FontSize` value is a number between 0 and 1.

Example: `t = uitable('Data',rand(10,3),'FontSize',14)`

`FontUnits` — Font size units

`'points'` (default) | `'normalized'` | `'inches'` | `'centimeters'` | `'pixels'`

Font size units, specified as one of the values from this table.

Units Value	Description
`'points'`	Points. One point is 1/72nd of an inch.
`'normalized'`	Normalized values for specifying the font size as a fraction of the uitable height. When you resize the uitable, MATLAB scales the displayed font to maintain that fraction.
`'inches'`	Inches.

Units Value	Description
`'centimeters'`	Centimeters.
`'pixels'`	Pixels. Starting in R2015b, distances in pixels are independent of your system resolution on Windows and Macintosh systems: • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. On Linux systems, the size of a pixel is determined by your system resolution.

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed in R2014b. If you specify either of these values, the result is a normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. MATLAB uses this property to select a font from those available on your system. Setting this property to `'italic'` selects a slanted version of the font, if it is available on your system.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

Interactive Control

`CellEditCallback` — Cell edit callback function

function handle | cell array | character vector

Cell edit callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This function makes the uitable respond when the user changes the contents of a table cell. You can use this callback function to perform calculations or validate user input.

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes a `CellEditData` object containing event data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation.

Property	Description
`Indices`	1-by-2 array containing the row and column indices of the cell the user edited.
`PreviousData`	Previous cell data. The default is an empty matrix, `[]`.
`EditData`	User-entered value.
`NewData`	Value that MATLAB wrote to the `Data` property array. This value is either the same as `EditData` or a converted value. The `NewData` property is empty if MATLAB detects an error in the user-entered data.
`Error`	Error message returned if MATLAB detects an error in the user-entered data. The `Error` property is empty when MATLAB successfully writes the value to the `Data` property.

Property	Description
	If the `Error` property is not empty, then the `CellEditCallback` can display the message, or it can attempt to fix the problem.
`Source`	Table object that is executing the `CellEditCallback` function.
`EventName`	`'CellEdit'`

When the user edits a table cell, MATLAB performs these steps:

1. Tries to store the new value into the `Data` property of the table
2. Calls the `CellEditCallback` function (if it exists)

If the value results in an error and there is no `CellEditCallback` function, then the cell data reverts to its previous value and no error displays.

Example: Evaluate User Input

This example shows how to create a callback function that evaluates a user-entered data in a numeric table cell. Paste this code into an editor and run it to see how it works.

```
function myui
    f = figure;
    myData = { 'A '  31; 'B'  41; 'C'  5; 'D' 2.6};
    t = uitable('Parent',f,...
                'Position', [25 25 700 200], ...
                'Data',myData,...
                'ColumnEditable', [false true], ...
                'CellEditCallback',@converttonum);
        function converttonum(hObject,callbackdata)
             numval = eval(callbackdata.EditData);
             r = callbackdata.Indices(1)
             c = callbackdata.Indices(2)
             hObject.Data{r,c} = numval;
        end
end
```

When you run `myui`, you can change a value in the second column of the table. In response, the `converttonum` callback function executes. The `converttonum` function uses the `eval` function to evaluate your input. Then, it sets the cell data to the value of `numval`. For example, if you enter `pi` or`1+1`, the `converttonum` function sets the table cell value to a numeric representation of the input. Because there is no error checking in

the `converttonum` function, invalid expressions return an error and the new value of the table cell becomes `NaN`.

`CellSelectionCallback` — Cell selection callback function

function handle | cell array | character vector

Cell selection callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback function executes when the user performs one of the following actions:

- Highlights a data cell (not a row or column header cell) by clicking it or navigating to it with an arrow key
- Selects a rectangular group of cells by holding the **Shift** key while selecting the cells
- Deselects a cell by **Ctrl**-clicking it

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes a `CellSelectionChangeData` object containing event data as the second argument to the callback function. This object contains the properties listed in the following table.

Property	Description
`Indices`	n-by-2 array containing the row and column indices of the cell the user selected.
`Source`	The table object that is executing the `CellSelectionCallback` function.
`EventName`	`'CellSelection'`

`ColumnEditable` — Ability to edit column cells

[ ] (default) | logical 1-by-n array | logical scalar

Ability to edit column cells, specified as:

- An empty logical array (`[]`) — No columns are editable.
- A logical 1-by-n array — This array specifies which columns are editable. The value of n is equal to the number of columns in the table. Each value in the array corresponds to a table column. A value of `true` in the array makes the cells in that column editable. A value of `false` makes the cells in that column uneditable.
- A logical scalar— The entire table editable or uneditable.

Example: `t = uitable('Data',rand(10,3),'ColumnEditable',[false true true])`

Example: `t = uitable('Data',rand(10,3),'ColumnEditable',false)`

Table columns that contain check boxes or pop-up menus must be editable so the user can interact with these controls.

`RearrangeableColumns` — Ability to rearrange table columns

`'off'` (default) | `'on'`

Ability to rearrange table columns, specified as `'off'` or `'on'`. This property provides a way to let users reorder the table columns (but not the labels) by clicking and dragging the column headers.

Note: Rearranging table columns in the UI does not affect the columns in the `Data` property array.

`ButtonDownFcn` — Button-press callback function

`''` (default) | function handle | cell array | character vector

Button-press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see “How to Specify Callback Property Values”.

The `ButtonDownFcn` callback is a function that executes when the user clicks a mouse button on the uitable. The callback executes in the following situations:

- The user right-clicks the uitable, and the uitable `Enable` property is set to `'on'`.
- The user right-clicks or left-clicks the Uitable, and the uitable `Enable` property is set to `'off'` or `'inactive'`.

`KeyPressFcn` — Key press callback function

`''` (default) | function handle | cell array | character vector

Key press callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This callback function executes when the uitable object has focus and the user presses a key. If you do not define a function for this property, MATLAB passes key presses to the parent figure. Repeated key presses retain the focus of the uitable, and the function executes with each key press. If the user presses multiple keys at approximately the same time, MATLAB detects the key press for the last key pressed.

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes an object containing callback data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation.

Property	Description	Examples:			
		a	=	Shift	Shift-a
`Character`	The character that displays as a result of pressing a key or keys. The character can be empty or unprintable.	`'a'`	`'='`	`''`	`'A'`

Property	Description	Examples:			
		a	=	Shift	Shift-a
`Modifier`	A cell array containing the names of one or more modifier keys that are being pressed (such as, **Ctrl**, **Alt**, **Shift**).	`{1x0 cell}`	`{1x0 cell}`	`{'shift'}`	`{'shift'}`
`Key`	The key being pressed, identified by the (lowercase) label on the key, or a text description.	`'a'`	`'equal'`	`'shift'`	`'a'`
`Source`	The object that has focus when the user presses the key.	uitable object	uitable object	uitable object	uitable object
`EventName`	The action that caused the callback function to execute.	`'KeyPre`	`'KeyPre`	`'KeyPress`	`'KeyPress'`

Pressing modifier keys affects the callback data in the following ways:

- Modifier keys can affect the `Character` property, but do not change the `Key` property.
- Certain keys, and keys modified with **Ctrl**, put unprintable characters in the `Character` property.
- **Ctrl**, **Alt**, **Shift**, and several other keys, do not generate `Character` property data.

You also can query the `CurrentCharacter` property of the figure to determine which character the user pressed.

`KeyReleaseFcn` — Key-release callback function

`''` (default) | function handle | cell array | character vector

Key-release callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see “How to Specify Callback Property Values”.

This callback function executes when the uitable object has focus and the user releases a key.

If you specify this property as a function handle (or cell array containing a function handle), MATLAB passes an object containing callback data as the second argument to the callback function. This object contains the properties described in the following table. You can access these properties inside the callback function using dot notation.

Property	Description	Examples:			
		a	=	Shift	Shift-a
`Character`	Character interpretation of the key that was released.	`'a'`	`'='`	`''`	`'A'`
`Modifier`	Current modifier, such as `'control'`, or an empty cell array if there is no modifier.	`{1x0 cell}`	`{1x0 cell}`	`{1x0 cell}`	`{1x0 cell}`
`Key`	Name of the key that was released, identified by the lowercase label on the key, or a text description.	`'a'`	`'equal'`	`'shift'`	`'a'`
`Source`	The object that has focus when the user presses the key.	uitable object	uitable object	uitable object	uitable object
`EventName`	The action that caused the callback function to execute.	`'ase'`	`'ase'`	`'ase'`	`'ase'`

Pressing modifier keys affects the callback data in the following ways:

- Modifier keys can affect the `Character` property, but do not change the `Key` property.
- Certain keys, and keys modified with **Ctrl**, put unprintable characters in the `Character` property.
- **Ctrl**, **Alt**, **Shift**, and several other keys, do not generate `Character` property data.

You also can query the `CurrentCharacter` property of the figure to determine which character the user pressed.

`Enable` — Operational state of uitable

`'on'` (default) | `'inactive'` | `'off'`

Operational state of uitable, specified as `'on'`, `'off'`, or `'inactive'`. The `Enable` property controls whether the uitable responds to button clicks. The are three possible values:

- `'on'` – The uitable is operational.
- `'off'` – The uitable is not operational and appears grayed-out.
- `'inactive'` – The uitable is not operational, but it has the same appearance as when `Enable` is `'on'`.

The value of the `Enable` property and the type of button click determine how the UI responds.

Enable Value	Response to Left-Click	Response to Right-Click
`'on'`	The uitable's `CellSelectionCallback` function executes (only for table cells, not header cells). The `Indices` property updates in the callback data object that MATLAB passes to the callback function.	**1** The figure's `WindowButtonDownFcn` callback executes. **2** The uitable `ButtonDownFcn` callback executes.
`'off'` or `'inactive'`	**1** The figure's `WindowButtonDownFcn` callback executes. **2** The uitable's `ButtonDownFcn` callback executes.	**1** The figure's `WindowButtonDownFcn` callback executes. **2** The uitable's `ButtonDownFcn` callback executes.

`TooltipString` — Tooltip text
character vector

Tooltip text, specified as a character vector (e.g., `'Hello World'`). When the user hovers the mouse pointer over the uitable and leaves it there, the tooltip displays. If you want to create a tooltip that has more than one line of text, use `sprintf` to generate a character vector containing the newline (`\n`) characters. Then set the `TooltipString` to the value returned by `sprintf`.

Example: Specify TooltipString Containing Two Lines

```
t = uitable;
```

```
s = sprintf('UITable tooltip line 1\nUITable tooltip line 2');
t.TooltipString = s;
```

Data Types: `char`

`UIContextMenu` — Uitable context menu

empty `GraphicsPlaceholder` array (default) | uicontextmenu object

Uitable context menu, specified as a uicontextmenu object. Use this property to display a context menu when the user right-clicks on the uitable. Create the context menu using the `uicontextmenu` function.

`Selected` — Selection status of uitable

`'off'` (default) | `'on'`

Note: The behavior of the `Selected` property changed in R2014b, and it is not recommended. It no longer has any effect on uitables. This property might be removed in a future release.

`SelectionHighlight` — Ability to highlight selection handles

`'on'` (default) | `'off'`

Note: The behavior of the `SelectionHighlight` property changed in R2014b, and it is not recommended. It no longer has any effect on uitables. This property might be removed in a future release.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

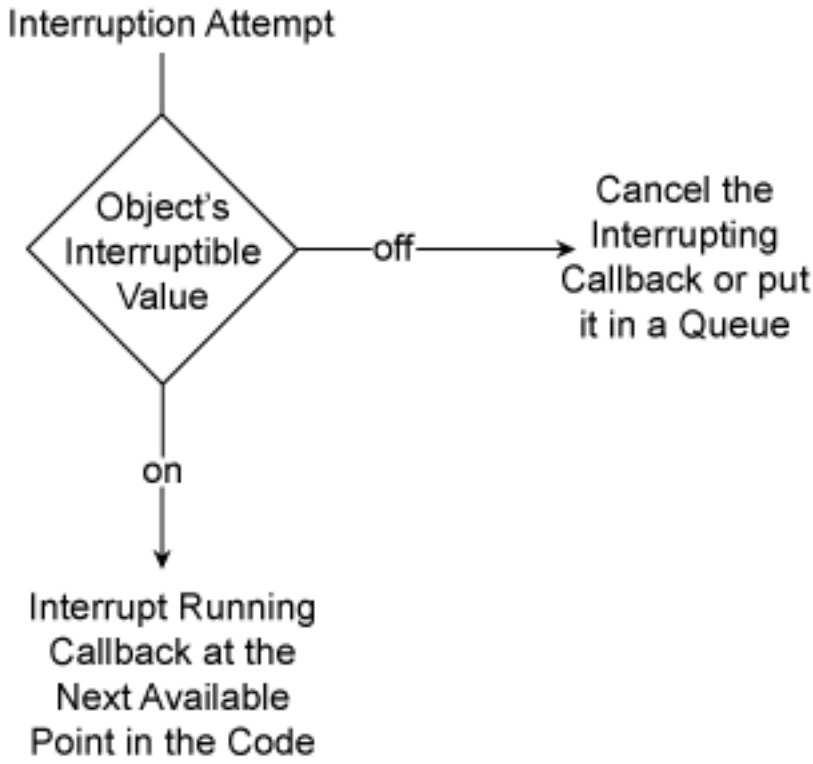

If a uitable callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See "Interrupt Callback Execution" for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

`HitTest` — Ability to become current object

`'on'` (default) | `'off'`

Ability to become current object, specified as `'on'` or `'off'`:

- Setting the value to `'on'` allows the uitable to become the current object when the user clicks on it. A value of `'on'` also allows the figure `CurrentObject` property and the `gco` function to report the uitable as the current object.
- Setting the value to `'off'` sets the figure `CurrentObject` property to an empty `GraphicsPlaceholder` array when the user clicks on the uitable.

Note: Use the `Enable` property to enable or disable a uitable.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn`

property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uitable creation function

function handle | cell array | character vector

Uitable creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uitable. MATLAB initializes all uitable property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uitable that is being created.

Setting the `CreateFcn` property on an existing uitable has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uitable object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uitable deletion function

function handle | cell array | character vector

Uitable deletion function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uitable (for example, when the end user deletes the figure). MATLAB executes the `DeleteFcn` callback before destroying the properties of the uitable. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uitable that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uitable'`

This property is read-only.

Type of graphics object, returned as `'uitable'`.

`Tag` — Uitable identifier

`''` (default) | character vector

Uitable identifier, specified as a character vector. This value to serves as an identifier for the uitable. When you need access to the uitable elsewhere in your code, you can use the `findobj` function to search for the uitable based on the `Tag` value.

Example: `t = uitable('Tag','table1')`

`UserData` — Data to associate with the uitable object

empty array (default) | array

Data to associate with the uitable object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See "Share Data Among Callbacks" for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Uitable parent

figure | uipanel | uibuttongroup | uitab

Uitable parent, specified as a figure, uipanel, uibuttongroup, or uitab. You can move a uitable to a different figure, uipanel, uibuttongroup, or uitab by setting this property to the handle of the target figure, uipanel, uibuttongroup, or uitab.

`Children` — Children of uitable

empty array

Children of uitable, returned as an empty array. Uitable objects have no children. Setting this property has no effect.

`HandleVisibility` — Visibility of Uitable handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uitable handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uitable handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties. These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object's handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uitable handle is always visible.
`'callback'`	The uitable handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uitable at the command-line, but allows callback functions to access it.

HandleVisibility Value	Description
`'off'`	The uitable handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

See Also

See Also

`uitable`

Topics

"Access Property Values"
"Default Property Values"

Table (App Designer) Properties

Control appearance and behavior of table

Compatibility

Valid for tables used in App Designer or figures created with the `uifigure` function. For tables used in GUIDE or apps created with the `figure` function, see Uitable Properties.

Description

Tables are components for presenting rows and columns of data in an app. The `uitable` function creates a table and sets any required properties before displaying it. By changing table property values, you can modify certain aspects of its appearance and behavior.

```
f = uifigure;
t = uitable(f,'Data',[1 2 3; 4 5 6; 7 8 9]);
d = t.Data;
t.Data = d + 1;
```

Appearance

`Visible` — Table visibility

`'on'` (default) | `'off'`

Table visibility, specified as `'on'` or `'off'`. When `Visible` is `'off'`, the table is not visible, but you can query and set its properties.

To make your app start faster, set the `Visible` property of all components that are not initially displayed to `'off'`.

`BackgroundColor` — Table background color

`[1 1 1; 0.94 0.94 0.94]` (default) | RGB triplet | m-by-3 matrix of RGB triplets

Table background color, specified as an RGB triplet or an m-by-3 matrix of RGB triplets. An RGB triplet is a row vector that specifies the intensities of the red, green, and blue

components of the color. The intensities must be in the range, `[0,1]`. Color names are not valid.

Specify an m-by-3 matrix when you want the shading of the table rows to follow a repeating pattern of m different colors. Each row of the matrix must be an RGB triplet. MATLAB uses the rows of the matrix when the `RowStriping` property is `'on'`. The table background is not striped unless both `RowStriping` is `'on'` and `BackgroundColor` is an m-by-3 matrix.

Example: `t = uitable(uifigure,'Data',rand(10,3),'BackgroundColor',[0.85 0.85 1])`

Example: `t = uitable(uifigure,'Data',rand(10,3),'BackgroundColor',[1 1 1 ;0.85 0.85 1])`

The following table lists the RGB triplets for certain colors.

Color	RGB Triplet
Yellow	`[1 1 0]`
Magenta	`[1 0 1]`
Cyan	`[0 1 1]`
Red	`[1 0 0]`
Green	`[0 1 0]`
Blue	`[0 0 1]`
White	`[1 1 1]`
Black	`[0 0 0]`

`ForegroundColor` — Cell text color

`[0 0 0]` (default) | RGB triplet | short name | long name

Cell text color, specified as an RGB triplet, short name, or long name. The color you specify sets the text color for all cells.

Example: `t = uitable(uifigure,'Data',rand(10,3),'ForegroundColor',[0 0 1])`

Example: `t = uitable(uifigure,'Data',rand(10,3),'ForegroundColor','b')`

Example: `t = uitable(uifigure,'Data',rand(10,3),'ForegroundColor','blue')`

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Table Data

`Data` — Table data

numeric array | logical array | cell array

Table data, specified as a numeric array, logical array, or cell array. The table data can be any numeric type, `logical`, or `char`. Use a cell array to specify a mixture of different data types.

Table data is displayed in the format specified by the `ColumnFormat` property. If there is a mismatch between the data type of the table data and the value of the `ColumnFormat` property, MATLAB converts the data or displays a warning. See the `ColumnFormat` property description for more information.

To prevent warnings that might occur when users enter invalid data, write a `CellEditCallback` function to convert the data to the appropriate type.

Example: `t = uitable(uifigure,'Data',rand(10,3))`

Example: `t = uitable(uifigure,'Data',{'blue' 5 true; 'orange' 25 false})`

Table Layout

RowName — Row heading names

'numbered' (default) | n-by-1 cell array of character vectors | empty cell array ({}) | empty matrix ([ ])

Row heading names, specified as one of these values:

- 'numbered' — The row headings are sequential numbers that start at 1.
- Cell array — Each element of the cell array becomes the name of a row. Row names are restricted to one line of text. If you specify a 1-by-n cell array, MATLAB stores and returns the value as an n-by-1 cell array.
- Empty cell array ({}) — The table has no row headings.
- Empty matrix ([ ]) — The table has no row headings

If the number of rows in the Data property array does not match the number of elements in the RowName array, then the number of rows in the resulting table reflects the number of rows in the Data property.

Example: `t = uitable(uifigure,'RowName',{'Name';'Number'},'Data',{'Bob';5})`

Example: `t = uitable(uifigure,'RowName',{'Name';[]},'Data',{'Bob';5})`

ColumnName — Column heading names

'numbered' (default) | n-by-1 cell array of character vectors | empty cell array ({}) | empty matrix ([ ])

Column heading names, specified as one of these values:

- 'numbered' — The column headings are sequential numbers that start at 1.
- Cell array — Each element of the cell array becomes the name of a column. Column names are restricted to one line of text. If you specify a 1-by-n cell array, MATLAB stores and returns the value as an n-by-1 cell array.
- Empty cell array ({}) — The table has no column headings.
- Empty matrix ([ ]) — The table has no column headings

If the number of columns in the Data property array does not match the number of elements in the ColumnName array, then the number of columns in the resulting table is the larger of the two values.

Example: `t = uitable(uifigure,'ColumnName',{'Name'; 'Number'},'Data',{'Bob' 5})`

Example: `t = uitable(uifigure,'ColumnName',{'Name'; []},'Data',{'Bob' 5})`

`ColumnWidth` — Width of table columns

`'auto'` (default) | 1-by-n cell array

Width of table columns, specified as `'auto'` or as a 1-by-n cell array.

Each column in the cell array corresponds to a column in the table. The values are in pixel units. If you specify `'auto'`, then MATLAB calculates the width of the column automatically using several factors, one of which is the `ColumnName` property value.

You can combine fixed column widths and `'auto'` column widths in a cell array, or you can specify a single value of `'auto'` to make all column widths automatic.

Example: `t = uitable(uifigure,'ColumnWidth','auto','Data',[1 2 3; 4 5 6])`

Example: `t = uitable(uifigure,'ColumnWidth',{64 60 40},'Data',[1 2 3; 4 5 6])`

Example: `t = uitable(uifigure,'ColumnWidth',{64 'auto' 40},'Data',[1 2 3; 4 5 6])`

`ColumnFormat` — Cell display format

empty cell array ({}) (default) | 1-by-n cell array of character vectors

Cell display format, specified as an empty cell array or a 1-by-n cell array of character vectors.

This property determines how the data in each column displays, and the constraints for editing that data in the UI. The elements of the cell array correspond to columns in the `Data` property array. If you do not want to specify a display format for a particular column, specify `[]` for that column. If you do not specify a format for a column, MATLAB determines the default display by the data type of the data in the cell.

Elements of the cell array must be one of the values described in the following table.

Cell Format Value	Description
`'char'`	Display left-justified values.

Cell Format Value	Description
	To edit a cell, the user types text to replace the existing value. If an element in the `Data` property array is logical, then `true` or `false` appears in the table.
`'logical'`	Display a check box. To edit a cell, the user selects or clears the check box. Then, MATLAB sets the corresponding `Data` value to `true` or `false`. The `ColumnEditable` property value must be `true` to allow users to select or clear the check boxes. Initially, a check box is selected when the corresponding `Data` value is `true`. The corresponding values in the `Data` property array must be of type `logical` to ensure that the data displays correctly in the table.
`'numeric'`	Display a right-justified value equivalent to the Command Window display for numeric data. If an element in the `Data` property array is logical, then `1` or `0` appears in the table. If an element in the `Data` property array is not numeric and not logical, then `NaN` appears in the table. To edit a cell, the user can enter any text. If a user enters text that represents a constant, such as `pi`, you can code the `CellEditCallback` function to convert the value to the numeric equivalent. In this case, MATLAB attempts to convert the user-entered text to a numeric value and stores it in the `Data` property. Then, the `CellEditCallback` function executes. See the `CellEditCallback` description for an example.

Cell Format Value	Description
A 1-by-n cell array of character vectors, such as `{'one' 'two' 'three'}`	Display a pop-up menu. To edit a cell, the user selects an item from the pop-up menu. MATLAB sets the corresponding `Data` property array value to the selected menu item. The `ColumnEditable` property value must be `true` to allow users to select items in the pop-up menu.
A format name accepted by the `format` function, such as: `'short'` or `'long'`	Display the `Data` property values using the specified format.

Effect of Pop-Up Menu ColumnFormat and Various Data Types

If the `ColumnFormat` value defines a pop-up menu, the initial `Data` value does not have to be one of the options in that menu. The initial `Data` value appears until the user makes a different selection.

For instance, suppose the `Data` property value for a given column is `'Choose'` for all rows, and the `ColumnFormat` value specifies a pop-up menu with the choices of `'group 1'` and `'group 2'`. When MATLAB creates the table, those table cells display `'Choose'` until the user selects an item in the pop-up menu:

```
f = uifigure;
myData = {'Andrew' 31 'Male' 'Choose'; ...
          'Bob' 41 'Male' 'Choose';  ...
          'Anne' 20 'Female' 'Choose';};
t = uitable('Parent', f,...
            'Position', [100 100 334 78],...
            'ColumnFormat',({[] [] [] {'group 1' 'group 2'}}),...
            'ColumnEditable', true,...
            'Data', myData);
```

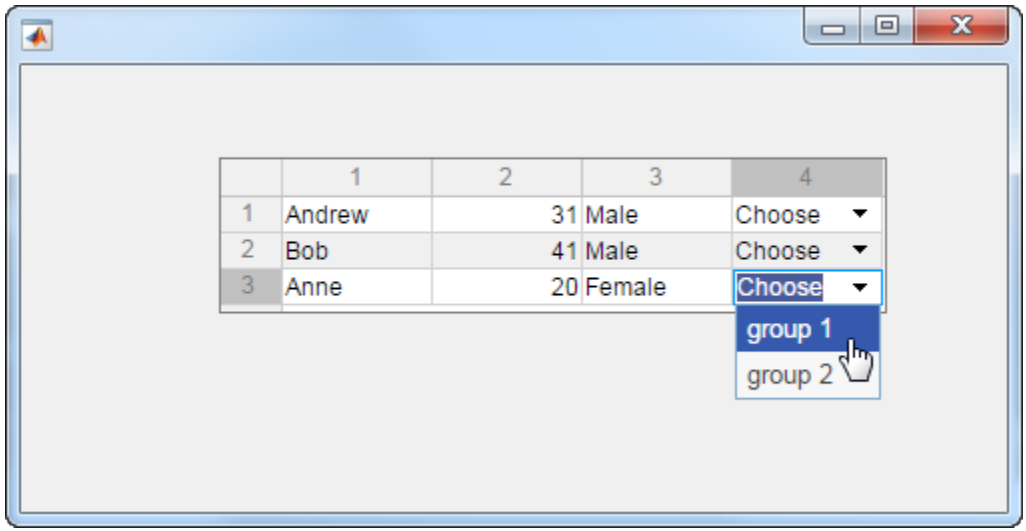

Data Display of Editable Columns

This table describes how various data types display with specific `ColumnFormat` values.

		ColumnFormat		
		`'numeric'`	`'char'`	`'logical'`
Data Type of Data Array Value	Any numeric type	Table displays number as-is.	MATLAB converts the value to text and displays it left-justified in the table. If MATLAB cannot convert the value, then `NaN` displays.	Not recommended. MATLAB might return a warning when the user edits the cell, unless you define a `CellEditCallback` function.
	`char`	Table displays the value right-justified, as if it is a number.	Table displays the value as-is.	Not recommended. MATLAB might return a warning when the user edits the cell,

				unless you define a `CellEditCallback` function.
	`logical`	Table displays logical values as numbers. MATLAB might return a warning when the user edits the cell, unless you define a `CellEditCallback` function.	Table displays logical value as left-justified `'true'` or `'false'`. MATLAB might return a warning when the user edits the cell, unless you define a `CellEditCallback` function.	Table displays logical values as check boxes.

`RowStriping` — Alternate row shading

`'on'` (default) | `'off'`

Alternate row shading, specified as `'on'` or `'off'`. This property controls the shading pattern of the table rows.

When the `RowStriping` value is set to `'on'`, the `BackgroundColor` matrix specifies the row colors to display in a repeating pattern. If the `BackgroundColor` matrix has only one row, then the shading is the same in all table rows.

When `RowStriping` is set to `'off'`, then the first color in the `BackgroundColor` matrix defines the shading for all rows in the table.

Location and Size

`Position` — Location and size of table

`[left bottom width height]`

Location and size of the table, specified as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the table

Element	Description
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the table
`width`	Distance between the right and left outer edges of the table
`height`	Distance between the top and bottom outer edges of the table

All measurements are in units specified by the `Units` property.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

`OuterPosition` — Location and size of table

`[left bottom width height]`

Location and size of the table, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `InnerPosition` property values.

`InnerPosition` — Location and size of table

`[left bottom width height]`

Location and size of the table, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `OuterPosition` property values.

`Units` — Units of measurement

`'pixels'` (default)

Units of measurement, specified as `'pixels'`. MATLAB measures all units from the lower left corner of the parent object.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontUnits` — Font size units

`'pixels'`

Font size units, specified `'pixels'`.

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`CellEditCallback` — Cell edit callback function

function handle | cell array | character vector

Cell edit callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

Use this callback function to perform calculations or validate input when the app user changes the contents of a table cell.

This callback function can access specific information about the user's interaction with the cell (such as the cell indices). MATLAB passes this information in a `CellEditData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.Indices` returns the indices of the selected cell. The `CellEditData` object is not available to callback functions specified as character vectors.

The following table describes properties of the `CellEditData` object.

Property	Description
`Indices`	1-by-2 array containing the row and column indices of the cell the user edited.
`PreviousData`	Previous cell data. The default is an empty matrix, `[]`.
`EditData`	User-entered value.
`NewData`	Value that MATLAB wrote to the `Data` property array. This value is either the same as `EditData` or a converted value. The `NewData` property is empty if MATLAB detects an error in the user-entered data.
`Error`	Error message returned if MATLAB detects an error in the user-entered data. The `Error` property is empty when MATLAB successfully writes the value to the `Data` property.

Property	Description
	If the `Error` property is not empty, then the `CellEditCallback` can display the message, or it can attempt to fix the problem.
`Source`	Component that executes the callback.
`EventName`	`'CellEdit'`

When the user edits a table cell, MATLAB performs these steps:

1. Tries to store the new value into the `Data` property of the table
2. Calls the `CellEditCallback` function (if it exists)

If the value results in an error and there is no `CellEditCallback` function, then the cell data reverts to its previous value and no error displays.

`CellSelectionCallback` — Cell selection callback function

function handle | cell array | character vector

Cell selection callback function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This callback function executes when the user performs one of the following actions:

- Highlights a data cell (not a row heading or column heading) by clicking it or navigating to it with an arrow key
- Selects a rectangular group of cells by holding the **Shift** key while selecting the cells

This callback function can access specific information about the user's interaction with the cell (such as the cell indices). MATLAB passes this information in a `CellSelectionChangeData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.Indices` returns the indices of the selected cell. The `CellSelectionChangeData` object is not available to callback functions specified as character vectors.

The following table describes properties of the `CellSelectionChangeData` object.

Property	Description
`Indices`	n-by-2 array containing the row and column indices of the cell the user selected
`Source`	Component that executes the callback
`EventName`	`'CellSelection'`

`ColumnEditable` — Ability to edit column cells

`[ ]` (default) | logical 1-by-n array | logical scalar

Ability to edit column cells, specified as:

- An empty logical array (`[ ]`) — No columns are editable.
- A logical 1-by-n array — This array specifies which columns are editable. The value of n is equal to the number of columns in the table. Each value in the array corresponds to a table column. A value of `true` in the array makes the cells in that column editable. A value of `false` makes the cells in that column uneditable.
- A logical scalar— The entire table editable or uneditable.

Example: `t = uitable(uifigure,'Data',rand(10,3),'ColumnEditable',[false true true])`

Example: `t = uitable(uifigure,'Data',rand(10,3),'ColumnEditable',false)`

Table columns that contain check boxes or pop-up menus must be editable so the user can interact with these controls.

`Enable` — Operational state of table

`'on'` (default) | `'off'`

Operational state of table, specified as `'on'` or `'off'`. The `Enable` property controls whether the table responds to user interaction. The are two possible values:

- `'on'` – The table is operational.
- `'off'` – The table appears grayed-out and does not respond to user interaction.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

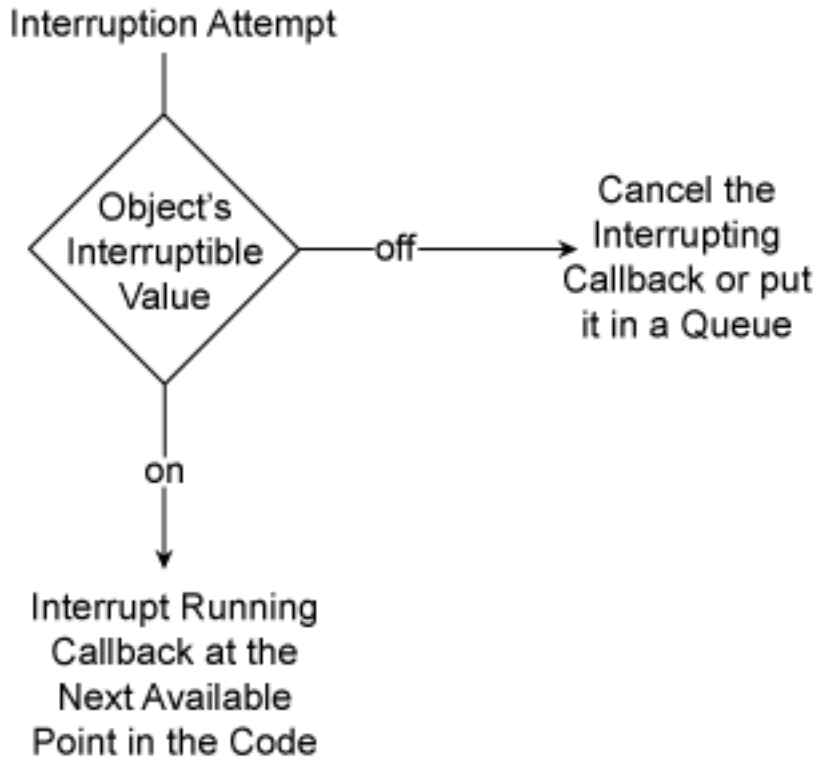

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uitable'`

This property is read-only.

Type of graphics object, returned as `'uitable'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'table1'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`Children` — Children of table

empty array

Children of table, returned as an empty array. Table objects have no children, so setting this property has no effect.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

`uitable`

Introduced in R2016b

uitoggletool

Create toggle button on toolbar

Syntax

```
t = uitoggletool
t = uitoggletool(Name,Value,...)
t = uitoggletool(parent)
t = uitoggletool(parent,Name,Value,...)
```

Description

`t = uitoggletool` creates a uitoggletool in the current figure's uitoolbar and returns the uitoggletool object, `t`. If there is no uitoolbar available, then MATLAB creates a new uitoolbar in the current figure to serve as the parent. Similarly, if there no figure is available, then MATLAB creates a new figure with a uitoolbar.

`t = uitoggletool(Name,Value,...)` creates a uitoggletool and specifies one or more uitoggletool property names and corresponding values. Use this syntax to override the default uitoggletool properties.

`t = uitoggletool(parent)` creates a uitoggletool and designates a specific parent object. The `parent` argument must be a uitoolbar object.

`t = uitoggletool(parent,Name,Value,...)` creates a uitoggletool with a specific parent and one or more uitoggletool properties.

A uitoggletool is a toggle button that appears in the figure's tool bar. The button has no icon, but its borders highlight when the user hovers over it with the mouse. You can create a button icon by setting the uitoggletool's `CData` property.

Examples

This example creates a `uitoolbar` and places a `uitoggletool` inside it.

```
f = figure('ToolBar','none');
tb = uitoolbar(f);
img = zeros(16,16,3);
t = uitoggletool(tb,'CData',img,'TooltipString','Hello');
```

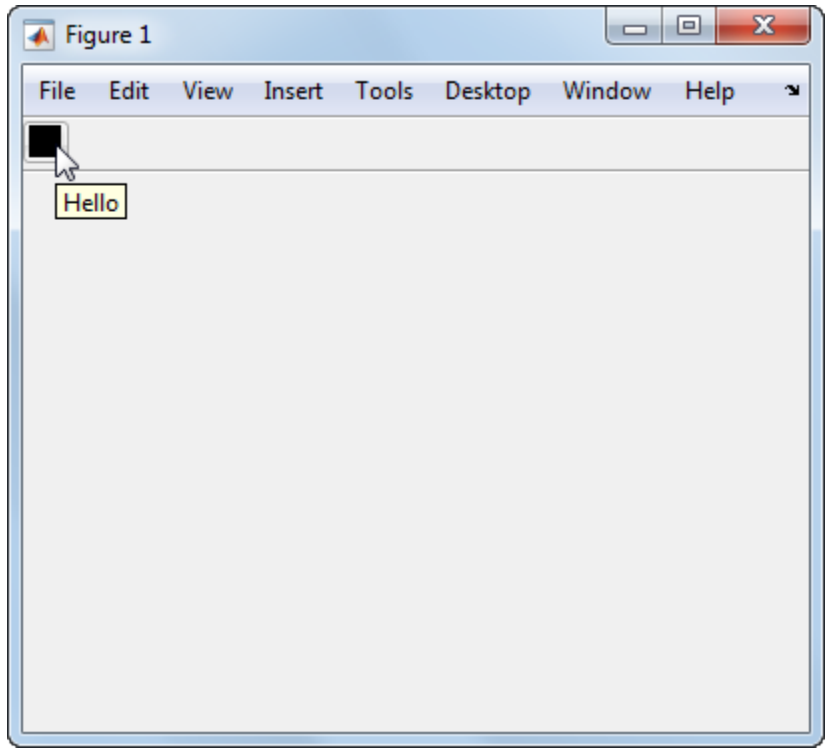

The `CData` property is set to a 16-by-16-by-3 array in which all elements are `0`. The zero values make the uitoggletool appear black.

Tips

- Uitoolbars (and their child uitoggletools) do not appear in figures whose WindowStyle property is set to `'Modal'`. If a figure containing a uitoolbar is changed to `'Modal'`, the uitoolbar still exists in the Children property of the figure. However, the uitoolbar does not display while `WindowStyle` is set to `'Modal'`.

Alternatives

You can create toolbars with toggle tools using GUIDE.

See Also

See Also

`uipushtool` | Uitoggletool Properties | `uitoolbar`

Topics

"Access Property Values"
"Create Toolbars for Programmatic Apps"

Introduced before R2006a

Uitoggletool Properties

Control appearance and behavior of uitoggletool

Description

Uitoggletools are toggle buttons that appear on the tool bar at the top of the a figure. The `uitoggletool` function creates a toggle button on a tool bar and sets any required properties before displaying it. By changing uitoggletool property values, you can modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
t = uitoggletool;
sep = t.Separator;
t.Separator = 'on';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Visible` — Uitoggletool visibility

`'on'` (default) | `'off'`

Uitoggletool visibility, specified as `'on'` or `'off'`. When the `Visible` property is set to `'off'`, the uitoggletool is not visible, but you can query and set its properties.

`Separator` — Separator line mode

`'off'` (default) | `'on'`

Separator line mode, specified as `'off'` or `'on'`. Setting this property to `'on'` draws a dividing line to left of the uitoggletool.

`CData` — Optional image to display on uitoggletool

3-D array of truecolor RGB values

Optional image to display on the uitoggletool, specified as a 3-D array of truecolor RGB values. The values in the array can be:

- Double-precision values between `0.0` and `1.0`
- `uint8` values between `0` and `255`

The length of the array's first and second dimensions must be less than or equal to 16. Otherwise, it might be clipped or distorted when it displays.

Data Types: `double` | `uint8`

Interactive Control

`State` — Toggle button state

`'off'` (default) | `'on'`

Toggle button state, specified as `'off'` or `'on'`. When this property value is `'on'`, the toggle button appears in the down (depressed) position. When this property value is `'off'`, the toggle button appears in the up position. Changing the state causes the appropriate `OnCallback` or `OffCallback` function to execute.

`ClickedCallback` — Callback function that executes when user clicks uitoggletool

`''` (default) | function handle | cell array | character vector

Callback function that executes when a user clicks the uitoggletool, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This callback function executes after the `OnCallback` function or `OffCallback` function executes (depending on the state of the button).

For more information about specifying callback functions as function handles, cell arrays, or character vectors, see "How to Specify Callback Property Values".

Data Types: `function_handle` | `cell` | `char`

`OnCallback` — Callback to execute when user turns on toggle button

`''` (default) | function handle | cell array | character vector

Callback to execute when user turns on the toggle button, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying callback functions as function handles, cell arrays, or character vectors, see "How to Specify Callback Property Values".

Data Types: `function_handle` | `cell` | `char`

`OffCallback` — Callback to execute when user turns off the toggle button

`''` (default) | function handle | cell array | character vector

Callback to execute when user turns off toggle button, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying callback functions as function handles, cell arrays, or character vectors, see "How to Specify Callback Property Values".

Data Types: `function_handle` | `cell` | `char`

`Enable` — Operational state of uitoggletool

`'on'` (default) | `'off'`

Operational state of uitoggletool, specified as `'on'` or `'off'`. The `Enable` property controls whether the uitoggletool responds to button clicks. The are two possible values:

- `'on'` – The uitoggletool is operational.
- `'off'` – The uitoggletool is not operational and appears grayed-out.

The value of the `Enable` property and the type of button click determine the response.

Enable Value	Response to Left-Click	Response to Right-Click
`'on'`	**1** The `OnCallback` or `OffCallback` function execute, depending on the current state of the uitoggletool. **2** The uitoggletool's `ClickedCallback` function executes.	The uitoggletool is not operational. No callback executes.
`'off'`	The uitoggletool is not operational. No callback executes.	The uitoggletool is not operational. No callback executes.

`TooltipString` — Tooltip text

character vector

Content of uitoggletool tooltip, specified as a character vector. When the user moves the mouse pointer over the uitoggletool and leaves it there, the tooltip displays.

Example: `'Some text'`

`UIContextMenu` — Context menu

empty `GraphicsPlaceholder` array (default) | uicontextmenu handle

This property has no effect on uitoggletools.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running

callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

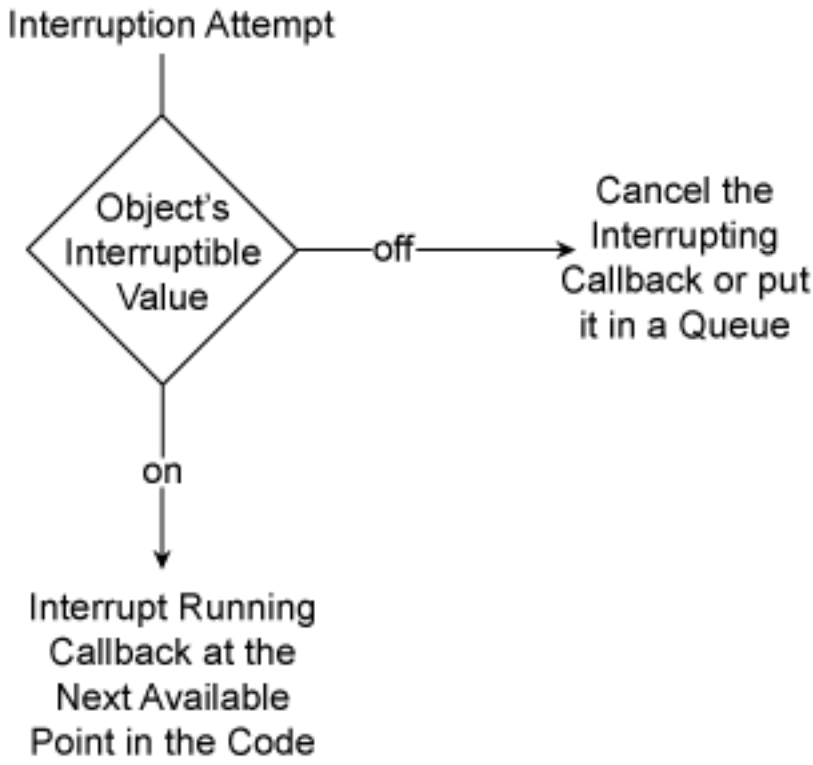

If a uitoggletool callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.

- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See "Interrupt Callback Execution" for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.

- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

`HitTest` — Ability to become current object

`'on'` (default) | `'off'`

This property has no effect on the uitoggletool.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uitoggletool creation function

function handle | cell array | character vector

Uitoggletool creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.

- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uitoggletool. MATLAB initializes all uitoggletool property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uitoggletool that is being created.

Setting the `CreateFcn` property on an existing uitoggletool has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uitoggletool object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uitoggletool deletion function

function handle | cell array | character vector

Uitoggletool deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uitoggletool (for example, when the end user deletes the figure). MATLAB executes the `DeleteFcn` callback before destroying the properties of the uitoggletool. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uitoggletool that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uitoggletool'`

This property is read-only.

Type of graphics object, returned as `'uitoggletool'`.

`Tag` — Uitoggletool identifier

`''` (default) | character vector

Uitoggletool identifier, specified as a character vector. This value to serves as an identifier for the uitoggletool. When you need access to the uitoggletool elsewhere in your code, you can use the `findobj` function to search for the uitoggletool based on the `Tag` value.

Example: `'toggletool1'`

Data Types: `char`

`UserData` — Data to associate with the uitoggletool object

empty array (default) | array

Data to associate with the uitoggletool object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See "Share Data Among Callbacks" for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Uitoggletool parent

uitoolbar

Uitoggletool parent, specified as a uitoolbar. You can move a uitoggletool to a different uitoolbar by setting this property to the handle of the target uitoolbar.

`HandleVisibility` — Visibility of Uitoggletool handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uitoggletool handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uitoggletool handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties. These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object's handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uitoggletool handle is always visible.
`'callback'`	The uitoggletool handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uitoggletool at the command-line, but allows callback functions to access it.
`'off'`	The uitoggletool handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

See Also

See Also

`uitoggletool` | `uitoolbar`

Topics

"Access Property Values"
"Default Property Values"

uitoolbar

Create toolbar on figure

Syntax

```
t = uitoolbar
t = uitoolbar(Name,Value,...)
t = uitoolbar(parent)
t = uitoolbar(parent,Name,Value,...)
```

Description

`t = uitoolbar` creates a uitoolbar in an existing figure and returns the uitoolbar object, `t`. If there is no figure available, then MATLAB creates a new figure to serve as the parent.

`t = uitoolbar(Name,Value,...)` creates a uitoolbar and specifies one or more uitoolbar property names and corresponding values. Use this syntax to override the default uitoolbar properties.

`t = uitoolbar(parent)` creates a uitoolbar in a specific parent figure. The `parent` input argument is the parent figure object.

`t = uitoolbar(parent,Name,Value,...)` creates a uitoolbar with a specific parent and one or more uitoolbar properties.

Examples

This example creates a figure containing an empty uitoolbar.

```
f = figure('ToolBar','none')
t = uitoolbar(f)
```

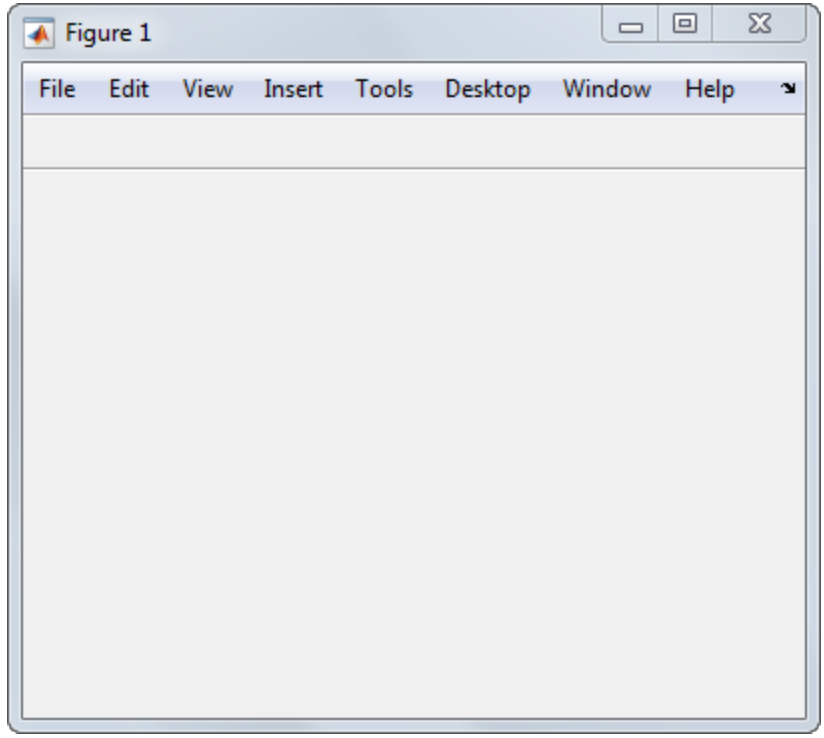

Tips

Uitoolbars do not appear in figures whose WindowStyle property is set to `'Modal'`. If a figure containing a uitoolbar child is changed to `'Modal'`, the uitoolbar child still exist in the Children property of the figure. However, the uitoolbar does not display while `WindowStyle` is set to `'Modal'`.

See Also

See Also

`figure` | `uipushtool` | `uitoggletool` | Uitoolbar Properties

Topics

"Create Toolbars for Programmatic Apps"
"Create Toolbars for GUIDE UIs"
"Access Property Values"

Introduced before R2006a

Uitoolbar Properties

Control appearance and behavior of tool bar

Description

A uitoolbar is a tool bar containing buttons at the top of a figure window. The `uitoolbar` function creates a tool bar in a figure and sets any required properties before displaying it. By changing uitoolbar property values, you can modify certain aspects of its appearance and behavior.

Starting in R2014b, you can use dot notation to query and set properties.

```
t = uitoolbar;
isvisible = t.Visible;
t.Visible = 'off';
```

If you are using an earlier release, use the `get` and `set` functions instead.

Appearance

`Visible` — Uitoolbar visibility
`'on'` (default) | `'off'`

Uitoolbar visibility, specified as `'on'` or `'off'`. When the `Visible` property is set to `'off'`, the uitoolbar is not visible, but you can query and set its properties.

Interactive Control

`UIContextMenu` — Context menu
empty `GraphicsPlaceholder` array (default) | uicontextmenu handle

This property has no effect on uitoolbars.

Callback Execution Control

`Interruptible` — Callback interruption
`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

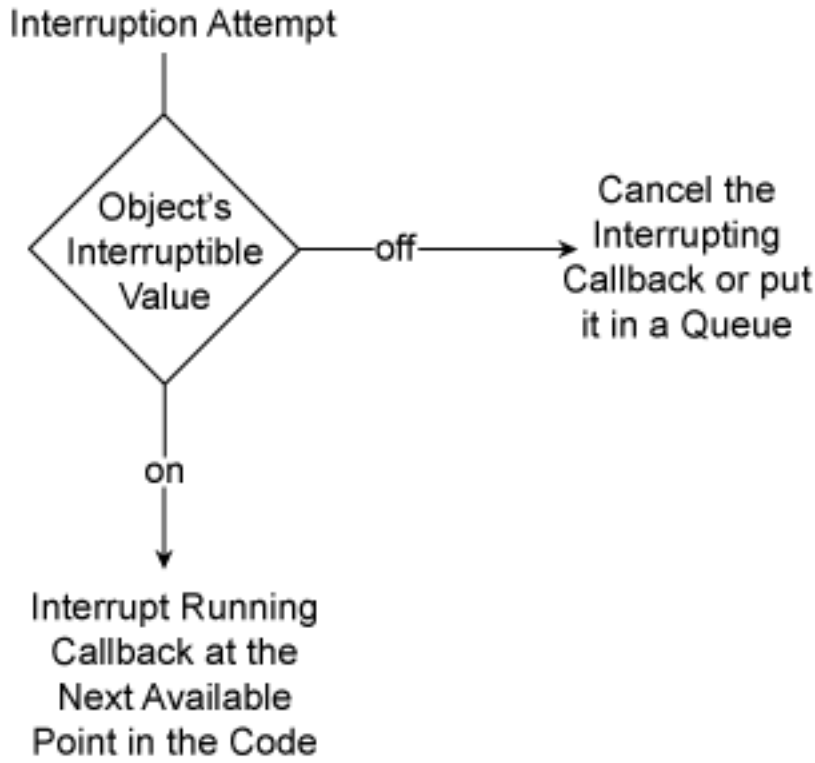

If a uitoolbar callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause`.
  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn`, or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.
- MATLAB does not save the state of properties or the display when an interruption occurs. For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

See “Interrupt Callback Execution” for an example that shows how the `Interruptible` and `BusyAction` properties affect the behavior of a program.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` (default) or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the source of the interrupting callback determines how MATLAB handles its execution. The `BusyAction` property has these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback. The `Interruptible` property of the object whose callback is running determines if interruption is allowed. If `Interruptible` is set to:

- `on` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `off` — The `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

See "Interrupt Callback Execution" for an example that shows how the `BusyAction` and `Interruptible` properties affect the behavior of a program.

`HitTest` — Ability to become current object

`'on'` (default) | `'off'`

This property has no effect on the uitoolbar.

Creation and Deletion Control

`BeingDeleted` — Deletion status

`'off'` (default) | `'on'`

This property is read-only.

Deletion status, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the object begins execution (see the `DeleteFcn`

property). The `BeingDeleted` property remains set to `'on'` until the object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Uitoolbar creation function

function handle | cell array | character vector

Uitoolbar creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

This property specifies a callback function to execute when MATLAB creates the uitoolbar. MATLAB initializes all uitoolbar property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the handle to the uitoolbar that is being created.

Setting the `CreateFcn` property on an existing uitoolbar has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the uitoolbar object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Uitoolbar deletion function

function handle | cell array | character vector

Uitoolbar deletion function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

For more information about specifying a callback property value as a function handle, cell array, or character vector, see "How to Specify Callback Property Values".

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes the uitoolbar (for example, when the end user deletes the figure). MATLAB executes the `DeleteFcn` callback before destroying the properties of the uitoolbar. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to get the handle to the uitoolbar that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uitoolbar'`

This property is read-only.

Type of graphics object, returned as `'uitoolbar'`.

`Tag` — Uitoolbar identifier

`''` (default) | character vector

Uitoolbar identifier, specified as a character vector. This value to serves as an identifier for the uitoolbar. When you need access to the uitoolbar elsewhere in your code, you can use the `findobj` function to search for the uitoolbar based on the `Tag` value.

Example: `'toolbar1'`

Data Types: `char`

`UserData` — Data to associate with the uitoolbar object

empty array (default) | array

Data to associate with the uitoolbar object, specified as any array. Specifying `UserData` can be useful for sharing data values within and across UIs. See "Share Data Among Callbacks" for more information.

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Uitoolbar parent

figure

Uitoolbar parent, specified as a figure. You can move a uitoolbar to a different figure by setting this property to the handle of the target figure.

`Children` — Children of uitoolbar

empty `GraphicsPlaceholder` array (default) | 1-D array of component objects

Children of uitoolbar, returned as an empty `GraphicsPlaceholder` or a 1-D array of component objects. The children of uitoolbars are uipushtools and uitoggletools.

You cannot add or remove children using the `Children` property of the uitoolbar. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the order of the components displayed in the Uitoolbar.

To add a child to this list, set the `Parent` property of the child component to be the uitoolbar object.

Objects with the `HandleVisibility` property set to `'off'` do not list in the `Children` property. For more information, see the `HandleVisibility` property description.

`HandleVisibility` — Visibility of Uitoolbar handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of Uitoolbar handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the uitoolbar handle in its parent's list of children. When a handle is not visible in its parent's list of children, it is not returned by functions that obtain handles by searching the object hierarchy or querying handle properties. These functions include `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`. The `HandleVisibility` property also controls the visibility of the object’s handle in the parent figure's `CurrentObject` property. Handles are still valid even if they are not

visible. If you know an object's handle, you can set and get its properties, and pass it to any function that operates on handles.

HandleVisibility Value	Description
`'on'`	The uitoolbar handle is always visible.
`'callback'`	The uitoolbar handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the uitoolbar at the command-line, but allows callback functions to access it.
`'off'`	The uitoolbar handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.

Set the graphics root `ShowHiddenHandles` property to `'on'` to make all handles visible, regardless of their `HandleVisibility` value. This setting has no effect on their `HandleVisibility` values.

See Also

See Also

`uitoolbar`

Topics

"Access Property Values"
"Default Property Values"

uiwait

Block program execution and wait to resume

Syntax

```
uiwait
uiwait(h)
uiwait(h,timeout)
```

Description

`uiwait` blocks execution until `uiresume` is called or the current figure is deleted. This syntax is the same as `uiwait(gcf)`.

`uiwait(h)` blocks execution until `uiresume` is called or the figure `h` is deleted.

`uiwait(h,timeout)` blocks execution until `uiresume` is called, the figure `h` is deleted, or `timeout` seconds elapse. The minimum value of `timeout` is 1. If `uiwait` receives a smaller value, it issues a warning and uses a 1 second `timeout`.

Examples

This example creates a UI with a **Continue** push button. The example calls `uiwait` to block MATLAB execution until `uiresume` is called. This happens when the user clicks the **Continue** push button because the push button's `Callback`, which responds to the click, calls `uiresume`.

```
f = figure;
h = uicontrol('Position',[20 20 200 40],'String','Continue',...
              'Callback','uiresume(gcbf)');
disp('This will print immediately');
uiwait(gcf);
disp('This will print after you click Continue');
close(f);
```

`gcbf` is the handle of the figure that contains the object whose callback is executing.

Tips

The `uiwait` and `uiresume` functions block and resume MATLAB and Simulink program execution. `uiwait` also blocks the execution of Simulink models. The functions `pause` (with no argument) and `waitfor` also block execution in this manner. `uiwait` is a convenient way to use the `waitfor` command. You typically use it in conjunction with a dialog box. It provides a way to block the execution of the MATLAB program that created the dialog, until the user responds to the dialog box. When used in conjunction with a modal dialog, `uiwait` can block the execution of the program file *and* restrict user interaction to the dialog only.

See Also

`dialog` | `figure` | `uicontrol` | `uimenu` | `uiresume` | `waitfor`

Introduced before R2006a

uminus, -

Unary minus

Syntax

```
C = -A
C = uminus(A)
```

Description

`C = -A` negates the elements of `A` and stores the result in `C`.

`C = uminus(A)` is an alternative way to execute `-A`, but is rarely used. It enables operator overloading for classes.

Examples

Negate Elements of Matrix

Create a 2-by-2 matrix, `A`.

```
A = [1 -3; -2 4]
```

```
A =

     1    -3
    -2     4
```

Negate the elements of `A`.

```
C = -A
```

```
C =

    -1     3
     2    -4
```

Input Arguments

A — Input array
scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array. A can be a numeric array, logical array, character array, duration array, or calendar duration array.
Complex Number Support: Yes

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also
`minus` | `uplus`

Topics
“Array vs. Matrix Operations”

"Operator Precedence"
"MATLAB Operators and Special Characters"

Introduced before R2006a

undocheckout

(To be removed) Undo previous checkout from source control system (UNIX platforms)

Note: `undocheckout` will be removed in a future release.

Syntax

```
undocheckout('filename')
undocheckout({'filename1','filename2', ...,'filenamen'})
```

Description

`undocheckout('filename')` makes the file `filename` available for checkout, where `filename` does not reflect any of the changes you made after you last checked it out. Use the full path for `filename` and include the file extension.

`undocheckout({'filename1','filename2', ...,'filenamen'})` makes `filename1` through `filenamen` available for checkout, where the files do not reflect any of the changes you made after you last checked them out. Use the full paths for the file names and include the file extensions.

Examples

Undo the checkouts of `/myserver/myfiles/clock.m` and `/myserver/myfiles/calendar.m` from the source control system:

```
undocheckout({'/myserver/myfiles/clock.m', ...
'/myserver/myfiles/calendar.m'})
```

Introduced before R2006a

unicode2native

Convert Unicode character representation to numeric bytes

Syntax

```
bytes = unicode2native(unicodestr)
bytes = unicode2native(unicodestr,encoding)
```

Description

`bytes = unicode2native(unicodestr)` converts a `char` vector of Unicode character representations, `unicodestr`, to the user default encoding, and returns the bytes as a `uint8` vector, `bytes`. Output vector `bytes` has the same general array shape as the `unicodestr` input. You can save the output of `unicode2native` to a file using the `fwrite` function.

`bytes = unicode2native(unicodestr,encoding)` converts `unicodestr` to the character encoding scheme specified by the character vector `encoding`. `encoding` must have no characters (`''`) or must be a name or alias for an encoding scheme. Some examples are `'UTF-8'`, `'latin1'`, `'US-ASCII'`, and `'Shift_JIS'`. If `encoding` is unspecified or has no characters (`''`), the default encoding scheme is used.

Examples

This example begins with two character vectors containing Unicode character representations. It assumes that `str1` contains text in a Western European language and that `str2` contains Japanese text. The example writes both character vectors into the same file, using the ISO-8859-1 character encoding scheme for the first character vector and the Shift-JIS encoding scheme for the second character vector. The example uses `unicode2native` to convert `str1` and `str2` to the appropriate encoding schemes.

```
fid = fopen('mixed.txt', 'w');
bytes1 = unicode2native(str1, 'ISO-8859-1');
fwrite(fid, bytes1, 'uint8');
bytes2 = unicode2native(str2, 'Shift_JIS');
```

```
fwrite(fid, bytes2, 'uint8');
fclose(fid);
```

See Also

native2unicode

Introduced before R2006a

union

Set union of two arrays

Syntax

```
C = union(A,B)
C = union(A,B,'rows')
[C,ia,ib] = union(A,B)
[C,ia,ib] = union(A,B,'rows')

[C,ia,ib] = union( ___ ,setOrder)

[C,ia,ib] = union(A,B,'legacy')
[C,ia,ib] = union(A,B,'rows','legacy')
```

Description

`C = union(A,B)` returns the combined data from `A` and `B` with no repetitions. `C` is in sorted order.

- If `A` and `B` are tables or timetables, then `union` returns the combined set of rows from both tables. For timetables, `union` takes row times into account to determine equality, and sorts the output timetable `C` by row times.

`C = union(A,B,'rows')` treats each row of `A` and each row of `B` as single entities and returns the combined rows from `A` and `B`, with no repetitions. `C` is in sorted order.

The `'rows'` option does not support cell arrays, unless one of the inputs is either a categorical array or a datetime array.

`[C,ia,ib] = union(A,B)` also returns index vectors `ia` and `ib`.

- Generally, the values in `C` are a sorted combination of the elements of `A(ia)` and `B(ib)`.
- If `A` and `B` are tables or timetables, then `C` is a sorted combination of the rows of `A(ia,:)` and `B(ib,:)`.

`[C,ia,ib] = union(A,B,'rows')` also returns index vectors `ia` and `ib`, such that the rows of `C` are a sorted combination of the rows of `A(ia,:)` and `B(ib,:)`.

`[C,ia,ib] = union( ___ ,setOrder)` returns `C` in a specific order using any of the input arguments in the previous syntaxes. `setOrder` can be `'sorted'` or `'stable'`:

- `'sorted'` — `C` is in sorted order. This is the default.
- `'stable'` — `C` is in the same order as `A`.

`[C,ia,ib] = union(A,B,'legacy')` and `[C,ia,ib] = union(A,B,'rows','legacy')` preserve the behavior of the `union` function from R2012b and prior releases.

The `'legacy'` option does not support categorical arrays, datetime arrays, duration arrays, tables, or timetables.

Examples

Union of Two Vectors

Define two vectors with a value in common.

```
A = [5 7 1];
B = [3 1 1];
```

Find the union of vectors `A` and `B`.

```
C = union(A,B)
```

```
C =

     1     3     5     7
```

Union of Two Tables

Define two tables with rows in common.

```
A = table([1:5]',['A';'B';'C';'D';'E'],logical([0;1;0;1;0]))
```

```
A = 5×3 table
    Var1    Var2    Var3
```

```
    ____    ____    _____

    1       A       false
    2       B       true
    3       C       false
    4       D       true
    5       E       false
```

```
B = table([1:2:10]',['A';'C';'E';'G';'I'],logical(zeros(5,1)))
```

```
B = 5×3 table
    Var1    Var2    Var3
    ____    ____    _____

    1       A       false
    3       C       false
    5       E       false
    7       G       false
    9       I       false
```

Find the union of tables A and B.

```
C = union(A,B)
```

```
C = 7×3 table
    Var1    Var2    Var3
    ____    ____    _____

    1       A       false
    2       B       true
    3       C       false
    4       D       true
    5       E       false
    7       G       false
    9       I       false
```

Union of Two Vectors and Their Indices

Define two vectors with a value in common.

```
A = [5 7 1];
B = [3 1 1];
```

Find the union of vectors A and B, as well as the index vectors, ia and ib.

```
[C,ia,ib] = union(A,B)
```

```
C =

     1     3     5     7


ia =

     3
     1
     2


ib = 1
```

The values in C are the combined values of A(ia) and B(ib).

Union of Two Tables and Their Indices

Define a table, A, of gender, age, and height for three people.

```
A = table(['M';'M';'F'],[27;52;31],[74;68;64],...
'VariableNames',{'Gender' 'Age' 'Height'},...
'RowNames',{'Ted' 'Fred' 'Betty'})
```

```
A = 3×3 table
             Gender    Age    Height
             ______    ___    ______

    Ted      M         27     74
    Fred     M         52     68
    Betty    F         31     64
```

Define a table, B with the same variables as A.

```
B = table(['F';'M'],[64;68],[31;47],...
'VariableNames',{'Gender' 'Height' 'Age'},...
'RowNames',{'Meg' 'Joe'})
```

```
B = 2×3 table
           Gender    Height    Age
           ______    ______    ___
```

```
    Meg     F          64         31
    Joe     M          68         47
```

Find the union of tables A and B, as well as the index vectors, ia and ib.

```
[C,ia,ib] = union(A,B)
```

```
C = 4×3 table
             Gender    Age    Height
             ______    ___    ______

    Betty    F         31     64
    Ted      M         27     74
    Joe      M         47     68
    Fred     M         52     68


ia =

     3
     1
     2


ib = 2
```

The data for Meg and Betty are the same. union only returns the index from A, which corresponds to Betty.

Union of Rows in Two Matrices

Define two matrices with a row in common.

```
A = [2 2 2; 0 0 1];
B = [1 2 3; 2 2 2; 2 2 2];
```

Find the combined rows of A and B, with no repetition, as well as the index vectors ia and ib.

```
[C,ia,ib] = union(A,B,'rows')
```

```
C =
```

```
     0     0     1
     1     2     3
     2     2     2


ia =

     2
     1


ib = 1
```

The rows of `C` are the combined rows of `A(ia,:)` and `B(ib,:)`.

Union of Two Vectors with Specified Output Order

Use the `setOrder` argument to specify the ordering of the values in `C`.

Specify `'stable'` if you want the values in `C` to have the same order as in `A` and `B`.

```
A = [5 7 1];
B = [3 1 1];
[C,ia,ib] = union(A,B,'stable')
```

```
C =

     5     7     1     3


ia =

     1
     2
     3


ib = 1
```

Alternatively, you can specify `'sorted'` order.

```
A = [5 7 1];
B = [3 1 1];
[C,ia,ib] = union(A,B,'sorted')
```

```
C =
```

```
     1     3     5     7

ia =

     3
     1
     2

ib = 1
```

Union of Vectors Containing NaNs

Define two vectors containing `NaN`.

```
A = [5 NaN 1];
B = [4 NaN NaN];
```

Find the union of vectors `A` and `B`.

```
C = union(A,B)
```

```
C =

     1     4     5   NaN   NaN   NaN
```

`union` treats `NaN` values as distinct.

Cell Array of Character Vectors with Trailing White Space

Create a cell array of character vectors, `A`.

```
A = {'dog','cat','fish','horse'};
```

Create a cell array of character vectors, `B`, where some of the vectors have trailing white space.

```
B = {'dog ','cat','fish ','horse'};
```

Combine the elements of `A` and `B`.

```
[C,ia,ib] = union(A,B)
```

```
C = 1×6 cell array
    'cat'    'dog'    'dog '    'fish'    'fish '    'horse'


ia =

     2
     1
     3
     4


ib =

     1
     3
```

`union` treats trailing white space in cell arrays of character vectors as distinct characters.

Union of Vectors of Different Classes and Shapes

Create a column vector character array.

```
A = ['A';'B';'C']
```

```
A = 3×1 char array
    'A
     B
     C'
```

```
class(A)
```

```
ans =
'char'
```

Create a row vector containing elements of numeric type `double`.

```
B = [68 69 70]
```

```
B =

    68    69    70
```

```
class(B)
```

```
ans =
'double'
```

The `union` of `A` and `B` returns a column vector character array.

```
C = union(A,B)
```

```
C = 6×1 char array
    'A
     B
     C
     D
     E
     F'
```

```
class(C)
```

```
ans =
'char'
```

Union of Char and Cell Array of Character Vectors

Create a character vector containing the letters `a` , `b`, and `c`.

```
A = ['a';'b';'c'];
class(A)
```

```
ans =
'char'
```

Create a cell array of character vectors containing the letters `c`, `d`, and `e`.

```
B = {'c','d','e'};
class(B)
```

```
ans =
'cell'
```

Combine the elements of `A` and `B`.

```
C = union(A,B)
```

```
C = 5×1 cell array
    'a'
    'b'
```

```
    'c'
    'd'
    'e'
```

The result, C, is a cell array of character vectors.

```
class(C)
```

```
ans =
'cell'
```

Preserve Legacy Behavior of union

Use the `'legacy'` flag to preserve the behavior of `union` from R2012b and prior releases in your code.

Find the union of A and B with the current behavior.

```
A = [5 7 1];
B = [3 1 1];
[C1,ia1,ib1] = union(A,B)
```

```
C1 =

     1     3     5     7


ia1 =

     3
     1
     2


ib1 = 1
```

Find the union of A and B, and preserve the legacy behavior.

```
A = [5 7 1];
B = [3 1 1];
[C2,ia2,ib2] = union(A,B,'legacy')
```

```
C2 =

     1     3     5     7
```

```
ia2 =

     1     2


ib2 =

     3     1
```

Input Arguments

A,B — Input arrays

numeric arrays | logical arrays | character arrays | string arrays | categorical arrays | datetime arrays | duration arrays | cell arrays of character vectors | tables | timetables

Input arrays, specified as numeric arrays, logical arrays, character arrays, string arrays, categorical arrays, datetime arrays, duration arrays, cell arrays of character vectors, tables, or timetables. If you specify the `'rows'` option, A and B must have the same number of columns.

A and B must be of the same class with the following exceptions:

- `logical`, `char`, and all numeric classes can combine with `double` arrays.
- Cell arrays of character vectors can combine with character arrays or string arrays.
- Categorical arrays can combine with character arrays, cell arrays of character vectors, or string arrays.
- Datetime arrays can combine with cell arrays of date character vectors or single date character vectors.

There are additional requirements for A and B based on data type:

- If A and B are both ordinal categorical arrays, they must have the same sets of categories, including their order. If neither A nor B are ordinal, they need not have the same sets of categories, and the comparison is performed using the category names. In this case, the categories of C are the sorted union of the categories from A and B.
- If A and B are tables or timetables, they must have the same variable names (except for order). For tables, row names are ignored, so that two rows that have the same

values, but different names, are considered equal. For timetables, row times are taken into account, so that two rows that have the same values, but different times, are not considered equal.

- If A and B are datetime arrays, they must be consistent with each other in whether they specify a time zone.

A and B also can be objects with the following class methods:

- `sort` (or `sortrows` for the `'rows'` option)
- `ne`

The object class methods must be consistent with each other. These objects include heterogeneous arrays derived from the same root class. For example, A and B can be arrays of handles to graphics objects.

`setOrder` — Order flag

`'sorted'` (default) | `'stable'`

Order flag, specified as `'sorted'` or `'stable'`, indicates the order of the values (or rows) in C.

Order Flag	Meaning
`'sorted'`	The values (or rows) in C return in sorted order. For example: `C = union([5 5 3],[1 2],'sorted')` returns `C = [1 2 3 5]`.
`'stable'`	The values (or rows) in C return in the same order as they appear in A and B. For example: `C = union([5 5 3],[1 2],'stable')` returns `C = [5 3 1 2]`.

Output Arguments

C — Combined data of A and B

vector | matrix | table | timetable

Combined data of A and B, returned as a vector, matrix, table, or timetable. If the inputs A and B are tables or timetables, then the order of the variables in C is the same as the order of the variables in A.

The following describes the shape of C when the inputs are vectors or matrices and when the 'legacy' flag is not specified:

- If the 'rows' flag is not specified, then C is a column vector unless both A and B are row vectors, in which case C is a row vector. For example, union([],[1 2]) returns a column vector.
- If the 'rows' flag is specified, then C is a matrix containing the combined rows of A and B.

The class of the inputs A and B determines the class of C:

- If the class of A and B are the same, then C is the same class.
- If you combine a char or nondouble numeric class with double, then C is the same class as the nondouble input.
- If you combine a logical class with double, then C is double.
- If you combine a cell array of character vectors with char, then C is a cell array of character vectors.
- If you combine a categorical array with a character vector, cell array of character vectors, or string, then C is a categorical array.
- If you combine a datetime array with a cell array of date character vectors or single date character vector, then C is a datetime array.
- If you combine a string array with a character vector or cell array of character vectors, then C is a string array.

ia — Index to A

column vector

Index to A, returned as a column vector when the 'legacy' flag is not specified. ia indicates the values (or rows) in A that contribute to the union. If a value (or row) appears multiple times in A, then ia contains the index to the first occurrence of the value (or row). If a value appears in both A and B, then ia contains the index to the first occurrence in A.

ib — Index to B

column vector

Index to B, returned as a column vector when the 'legacy' flag is not specified. ib indicates the values (or rows) in B that contribute to the union. If there is a repeated

value (or row) appearing exclusively in `B`, then `ib` contains the index to the first occurrence of the value. If a value (or row) appears in both `A` and `B`, then `ib` does not contain an index to the value (or row).

Tips

- To find the union with respect to a subset of variables from a table or timetable, you can use column subscripting. For example, you can use `union(A(:,vars),B(:,vars))`, where *`vars`* is a positive integer, a vector of positive integers, a variable name, a cell array of variable names, or a logical vector. Alternatively, you can use `vartype` to create a subscript that selects variables of a specified type.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not support cell arrays for the first or second arguments.
- When you do not specify the `'rows'` option:
  - Inputs `A` and `B` must be vectors with the same orientation. If you specify the `'legacy'` option, then inputs `A` and `B` must be row vectors.
  - The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1.
  - The input`[]` is not supported. Use a 1-by-0 or 0-by-1 input, for example , `zeros(1,0)`, to represent the empty set.
  - If you specify the `'legacy'` option, then empty outputs are row vectors, 1-by-0. They are never 0-by-0.
- When you specify both the `'legacy'` option and the `'rows'` option, the outputs `ia` and `ib` are column vectors. If these outputs are empty, they are 0-by-1. They are never 0-by-0, even if the output `C` is 0-by-0.

- When the `setOrder` is not `'stable'` or when you specify the `'legacy'` option, the inputs must already be sorted in ascending order. The first output, `C`, is sorted in ascending order.
- Complex inputs must be `single` or `double`.
- When one input is complex and the other input is real, do one of the following:
  - Set `setOrder` to `'stable'`.
  - Sort the real input in complex ascending order (by absolute value). Suppose the real input is `x`. Use `sort(complex(x))` or `sortrows(complex(x))`.
- See "Code Generation for Complex Data with Zero-Valued Imaginary Parts" (MATLAB Coder).

See Also

See Also

`intersect` | `ismember` | `issorted` | `setdiff` | `setxor` | `sort` | `unique`

Topics

"Combine Categorical Arrays"

Introduced before R2006a

unique

Unique values in array

Syntax

```
C = unique(A)
C = unique(A,'rows')
[C,ia,ic] = unique(A)
[C,ia,ic] = unique(A,'rows')

[C,ia,ic] = unique(A,setOrder)
[C,ia,ic] = unique(A,'rows',setOrder)

[C,ia,ic] = unique(A,'legacy')
[C,ia,ic] = unique(A,'rows','legacy')
[C,ia,ic] = unique(A,occurrence,'legacy')
[C,ia,ic] = unique(A,'rows',occurrence,'legacy')
```

Description

`C = unique(A)` returns the same data as in `A`, but with no repetitions. `C` is in sorted order.

- If `A` is a table or timetable, then `unique` returns the unique rows in `A` in sorted order. For timetables, `unique` takes row times and row values into account when determining whether rows are unique, and sorts the output timetable `C` by row times.

`C = unique(A,'rows')` treats each row of `A` as a single entity and returns the unique rows of `A` in sorted order.

The `'rows'` option does not support cell arrays.

`[C,ia,ic] = unique(A)` also returns index vectors `ia` and `ic`.

- If `A` is a vector, then `C = A(ia)` and `A = C(ic)`.
- If `A` is a matrix or array, then `C = A(ia)` and `A(:) = C(ic)`.

- If A is a table or a timetable, then `C = A(ia,:)` and `A = C(ic,:)`.

`[C,ia,ic] = unique(A,'rows')` also returns index vectors `ia` and `ic`, such that `C = A(ia,:)` and `A = C(ic,:)`.

`[C,ia,ic] = unique(A,setOrder)` and `[C,ia,ic] = unique(A,'rows', setOrder)` return C in a specific order. `setOrder` can be `'sorted'` or `'stable'`:

- `'sorted'` — C is in sorted order. This is the default.
- `'stable'` — C is in the same order as A.

`[C,ia,ic] = unique(A,'legacy')`, `[C,ia,ic] = unique(A,'rows','legacy')`, `[C,ia,ic] = unique(A,occurrence,'legacy')`,and `[C,ia,ic] = unique( A,'rows',occurrence,'legacy')` preserve the behavior of the `unique` function from R2012b and prior releases.

The `'legacy'` option does not support categorical arrays, datetime arrays, duration arrays, tables, or timetables.

Examples

Unique Values in Vector

Define a vector with a repeated value.

```
A = [9 2 9 5];
```

Find the unique values of A.

```
C = unique(A)
```

```
C =

     2     5     9
```

Unique Rows in Table

Define a table with repeated data.

```
Name = {'Fred';'Betty';'Bob';'George';'Jane'};
```

```
Age = [38;43;38;40;38];
Height = [71;69;64;67;64];
Weight = [176;163;131;185;131];

A = table(Age,Height,Weight,'RowNames',Name)
```

```
A = 5×3 table
              Age    Height    Weight
              ___    ______    ______

    Fred      38     71        176
    Betty     43     69        163
    Bob       38     64        131
    George    40     67        185
    Jane      38     64        131
```

Find the unique rows of A.

```
C = unique(A)
```

```
C = 4×3 table
              Age    Height    Weight
              ___    ______    ______

    Bob       38     64        131
    Fred      38     71        176
    George    40     67        185
    Betty     43     69        163
```

`unique` returns the rows of A in sorted order by the first variable, `Age` and then by the second variable, `Height`.

Unique Values and Their Indices

Define a vector with a repeated value.

```
A = [9 2 9 5];
```

Find the unique values of A and the index vectors `ia` and `ic`, such that `C = A(ia)` and `A = C(ic)`.

```
[C, ia, ic] = unique(A)
```

```
C =

     2     5     9


ia =

     2
     4
     1


ic =

     3
     1
     3
     2
```

Unique Rows in Matrix

Create a 12-by-3 matrix with some repeated rows.

```
A = randi(3,12,3)
```

```
A =

     3     3     3
     3     2     3
     1     3     3
     3     1     2
     2     2     2
     1     3     1
     1     3     3
     2     3     1
     3     2     1
     3     1     1
```

Find the unique rows of `A` based on the data in the first two columns. Specify three outputs to return the index vectors `ia` and `ic`.

```
[C,ia,ic] = unique(A(:,1:2),'rows')
```

```
C =

     1     3
     2     2
     2     3
     3     1
     3     2
     3     3


ia =

     3
     5
     8
     4
     2
     1


ic =

     6
     5
     1
     4
     2
     1
     1
     3
     5
     4
```

Use `ia` to index into `A` and retrieve the rows that have unique combinations of elements in the first two columns.

```
uA = A(ia,:)
```

```
uA =

     1     3     3
     2     2     2
     2     3     1
     3     1     2
```

```
     3     2     3
     3     3     3
```

Unique Values in Vector with Specified Order

Use the `setOrder` argument to specify the ordering of the values in `C`.

Specify `'stable'` if you want the values in `C` to have the same order as in `A`.

```
A = [9 2 9 5];
[C, ia, ic] = unique(A,'stable')
```

```
C =

     9     2     5


ia =

     1
     2
     4


ic =

     1
     2
     1
     3
```

Alternatively, you can specify `'sorted'` order.

```
[C, ia, ic] = unique(A,'sorted')
```

```
C =

     2     5     9


ia =

     2
```

```
     4
     1


ic =

     3
     1
     3
     2
```

Unique Values in Array Containing NaNs

Define a vector containing `NaN`.

```
A = [5 5 NaN NaN];
```

Find the unique values of `A`.

```
C = unique(A)
```

```
C =

     5   NaN   NaN
```

`unique` treats `NaN` values as distinct.

Unique Entries in Cell Array of Character Vectors

Create a cell array of character vectors.

```
A = {'one','two','twenty-two','One','two'};
```

Find the unique character vectors contained in `A`.

```
C = unique(A)
```

```
C = 1×4 cell array
    'One'    'one'    'twenty-two'    'two'
```

Cell Array of Character Vectors with Trailing White Space

Create a cell array of character vectors, A, where some of the vectors have trailing white space.

```
A = {'dog','cat','fish','horse','dog ','fish '};
```

Find the unique character vectors contained in A.

```
C = unique(A)
```

```
C = 1×6 cell array
    'cat'    'dog'    'dog '    'fish'    'fish '    'horse'
```

`unique` treats trailing white space in cell arrays of character vectors as distinct characters.

Preserve Legacy Behavior of unique

Use the `'legacy'` flag to preserve the behavior of `unique` from R2012b and prior releases in your code.

Find the unique elements of A with the current behavior.

```
A = [9 2 9 5];
[C1, ia1, ic1] = unique(A)
```

```
C1 =

     2     5     9


ia1 =

     2
     4
     1


ic1 =

     3
     1
```

```
     3
     2
```

Find the unique elements of A, and preserve the legacy behavior.

```
[C2, ia2, ic2] = unique(A, 'legacy')
```

```
C2 =

     2     5     9


ia2 =

     2     4     3


ic2 =

     3     1     3     2
```

Input Arguments

A — Input array

numeric array | logical array | character array | categorical array | datetime array | duration array | string array | cell array of character vectors | table | timetable

Input array, specified as a numeric array, logical array, character array, categorical array, datetime array, duration array, string array, cell array of character vectors, table, or timetable.

- If A is a table, `unique` does not take row names into account. Two rows that have the same values, but different names, are considered equal.
- If A is a timetable, `unique` takes row times into account. Two rows that have the same values, but different times, are not considered equal.

A also can be an object with the following class methods:

- `sort` (or `sortrows` for the `'rows'` option)

- `ne`

The object class methods must be consistent with each other. These objects include heterogeneous arrays derived from the same root class. For example, `A` can be an array of handles to graphics objects.

`setOrder` — Order flag

`'sorted'` (default) | `'stable'`

Order flag, specified as `'sorted'` or `'stable'`, indicates the order of the values (or rows) in `C`.

Order Flag	Meaning
`'sorted'`	The values (or rows) in `C` return in sorted order. For example: `C = unique([5 5 3 4],'sorted')` returns `C = [3 4 5]`.
`'stable'`	The values (or rows) in `C` return in the same order as in `A`. For example: `C = unique([5 5 3 4],'stable')` returns `C = [5 3 4]`.

`occurrence` — Occurrence flag for legacy behavior

`'last'` (default) | `'first'`

Occurrence flag for legacy behavior, specified as `'first'` or `'last'`, indicates whether `ia` should contain the first or last indices to repeated values found in `A`.

Occurrence Flag	Meaning
`'last'`	If there are repeated values (or rows) in `A`, then `ia` contains the index to the last occurrence of the repeated value. For example: `[C,ia,ic] = unique([9 9 9],'last','legacy')` returns `ia = 3`.
`'first'`	If there are repeated values (or rows) in `A`, then `ia` contains the index to the first occurrence of the repeated value. For example: `[C,ia,ic] = unique([9 9 9],'first','legacy')` returns `ia = 1`.

Output Arguments

C — Unique data of A

vector | matrix | table | timetable

Unique data of A, returned as a vector, matrix, table, or timetable. The following describes the shape of C when the input, A, is a vector or a matrix:

- If the 'rows' flag is not specified and A is a row vector, then C is a row vector.
- If the 'rows' flag is not specified and A is not a row vector, then C is a column vector.
- If the 'rows' flag is specified, then C is a matrix containing the unique rows of A.

The class of C is the same as the class of the input A.

ia — Index to A

column vector

Index to A, returned as a column vector of indices to the *first* occurrence of repeated elements. When the 'legacy' flag is specified, ia is a row vector that contains indices to the *last* occurrence of repeated elements.

The indices generally satisfy C = A(ia). If A is a table, or if the 'rows' option is specified, then C = A(ia,:).

ic — Index to C

column vector

Index to C, returned as a column vector when the 'legacy' flag is not specified. ic contains indices that satisfy the following properties.

- If A is a vector, then A = C(ic).
- If A is a matrix or array, then A(:) = C(ic).
- If A is a table, or if the 'rows' option is specified, then A = C(ic,:).

Tips

- To find unique rows in table or timetable A with respect to a subset of variables, you can use column subscripting. For example, you can use unique(A(:,*vars*)), where *vars* is a positive integer, a vector of positive integers, a variable name, a cell array

of variable names, or a logical vector. Alternatively, you can use `vartype` to create a subscript that selects variables of a specified type.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- Use the syntax `C = unique(A)` for tall vectors and tall tables, or `C = unique(A,'rows')` for tall matrices.
- Multiple outputs are not supported.

For more information, see "Tall Arrays".

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Code generation does not support cell arrays for the first argument.
- When you do not specify the `'rows'` option:
  - The input `A` must be a vector. If you specify the `'legacy'` option, the input `A` must be a row vector.
  - The first dimension of a variable-size row vector must have fixed length 1. The second dimension of a variable-size column vector must have fixed length 1.
  - The input `[]` is not supported. Use a 1-by-0 or 0-by-1 input, for example, `zeros(1,0)`, to represent the empty set.
  - If you specify the `'legacy'` option, then empty outputs are row vectors, 1-by-0. They are never 0-by-0.

- When you specify both the `'rows'` option and the `'legacy'`option, outputs `ia` and `ic` are column vectors. If these outputs are empty, then they are 0-by-1, even if the output `C` is 0-by-0.
- When the `setOrder` is not `'stable'` or when you specify the `'legacy'` option, the input `A` must already be sorted in ascending order. The first output, `C`, is sorted in ascending order.
- Complex inputs must be `single` or `double`.

See Also

See Also

`intersect` | `ismember` | `issorted` | `setdiff` | `setxor` | `sort` | `union` | `uniquetol`

Introduced before R2006a

uniquetol

Unique values within tolerance

Syntax

```
C = uniquetol(A,tol)
C = uniquetol(A)
[C,IA,IC] = uniquetol( ___ )
[ ___ ] = uniquetol( ___ ,Name,Value)
```

Description

`C = uniquetol(A,tol)` returns the unique elements in `A` using tolerance `tol`. Two values, `u` and `v`, are within tolerance if

```
abs(u-v) <= tol*max(abs(A(:)))
```

That is, `uniquetol` scales the `tol` input based on the magnitude of the data.

`uniquetol` is similar to `unique`. Whereas `unique` performs exact comparisons, `uniquetol` performs comparisons using a tolerance.

`C = uniquetol(A)` uses a default tolerance of `1e-6` for single-precision inputs and `1e-12` for double-precision inputs.

`[C,IA,IC] = uniquetol( ___ )` returns index vectors `IA` and `IC`, such that `C = A(IA)` and `A~C(IC)` (or `A(:)~C(IC)` if `A` is a matrix), where ~ means the values are within tolerance of each other. You can use any of the input arguments in previous syntaxes.

`[ ___ ] = uniquetol( ___ ,Name,Value)` uses additional options specified by one or more Name-Value pair arguments using any of the input or output argument combinations in previous syntaxes. For example, `uniquetol(A,'ByRows',true)` determines the unique rows in `A`.

Examples

Unique Elements in Presence of Numerical Error

Create a vector, x. Obtain a second vector, y, by transforming and untransforming x. This transformation introduces round-off differences to y.

```
x = (1:6)'*pi;
y = 10.^log10(x);
```

Verify that x and y are not identical by taking the difference.

```
x-y
```

```
ans =

   1.0e-14 *

    0.0444
         0
         0
         0
         0
   -0.3553
```

Use unique to find the unique elements in the concatenated vector [x;y]. The unique function performs exact comparisons and determines that some values in x are not exactly equal to values in y. These are the same elements that have a nonzero difference in x-y. Thus, c contains values that *appear* to be duplicates.

```
c = unique([x;y])
```

```
c =

    3.1416
    3.1416
    6.2832
    9.4248
   12.5664
   15.7080
   18.8496
   18.8496
```

Use `uniquetol` to perform the comparison using a small tolerance. `uniquetol` treats elements that are within tolerance as equal.

```
C = uniquetol([x;y])
```

```
C =

    3.1416
    6.2832
    9.4248
   12.5664
   15.7080
   18.8496
```

Determine Unique Rows

By default, `uniquetol` looks for unique *elements* that are within tolerance, but it also can find unique *rows* of a matrix that are within tolerance.

Create a numeric matrix, `A`. Obtain a second matrix, `B`, by transforming and untransforming `A`. This transformation introduces round-off differences to `B`.

```
A = [0.05 0.11 0.18; 0.18 0.21 0.29; 0.34 0.36 0.41; 0.46 0.52 0.76];
B = log10(10.^A);
```

Use `unique` to find the unique rows in `A` and `B`. The `unique` function performs exact comparisons and determines that all of the rows in the concatenated matrix `[A;B]` are unique, even though some of the rows differ by only a small amount.

```
unique([A;B],'rows')
```

```
ans =

    0.0500    0.1100    0.1800
    0.0500    0.1100    0.1800
    0.1800    0.2100    0.2900
    0.1800    0.2100    0.2900
    0.3400    0.3600    0.4100
    0.3400    0.3600    0.4100
    0.4600    0.5200    0.7600
```

```
    0.4600    0.5200    0.7600
```

Use `uniquetol` to find the unique rows. `uniquetol` treats rows that are within tolerance as equal.

```
uniquetol([A;B],'ByRows',true)
```

```
ans =

    0.0500    0.1100    0.1800
    0.1800    0.2100    0.2900
    0.3400    0.3600    0.4100
    0.4600    0.5200    0.7600
```

Prepare Vectors for Exact Comparison

Create a vector, `x`. Obtain a second vector, `y`, by transforming and untransforming `x`. This transformation introduces round-off differences to some elements in `y`.

```
x = (1:6)'*pi;
y = 10.^log10(x);
```

Combine `x` and `y` into a single vector, `A`. Use `uniquetol` to reconstruct `A`, treating the values that are within tolerance as equal.

```
A = [x;y]
```

```
A =

    3.1416
    6.2832
    9.4248
   12.5664
   15.7080
   18.8496
    3.1416
    6.2832
    9.4248
   12.5664
```

```
[C,IA,IC] = uniquetol(A);
```

```
newA = C(IC)
```

```
newA =

    3.1416
    6.2832
    9.4248
   12.5664
   15.7080
   18.8496
    3.1416
    6.2832
    9.4248
   12.5664
```

You can use `newA` with `==` or functions that use exact equality like `isequal` or `unique` in subsequent code.

```
D1 = unique(A)
```

```
D1 =

    3.1416
    3.1416
    6.2832
    9.4248
   12.5664
   15.7080
   18.8496
   18.8496
```

```
D2 = unique(newA)
```

```
D2 =

    3.1416
    6.2832
    9.4248
   12.5664
   15.7080
   18.8496
```

Subset Data Using Large Tolerance

Create a cloud of 2-D sample points constrained to be inside a circle of radius `0.5` centered at the point $(\frac{1}{2},\frac{1}{2})$.

```
x = rand(10000,2);
insideCircle = sqrt((x(:,1)-.5).^2+(x(:,2)-.5).^2)<0.5;
y = x(insideCircle,:);
```

Find a reduced set of points, such that each point of the original dataset is within tolerance of a point.

```
tol = 0.05;
C = uniquetol(y,tol,'ByRows',true);
```

Plot the reduced set of points as red dots on top of the original data set. The red dots are all members of the original data set. All the red dots are at least a distance `tol` apart.

```
plot(y(:,1),y(:,2),'.')
hold on
axis equal
plot(C(:,1), C(:,2), '.r', 'MarkerSize', 10)
```

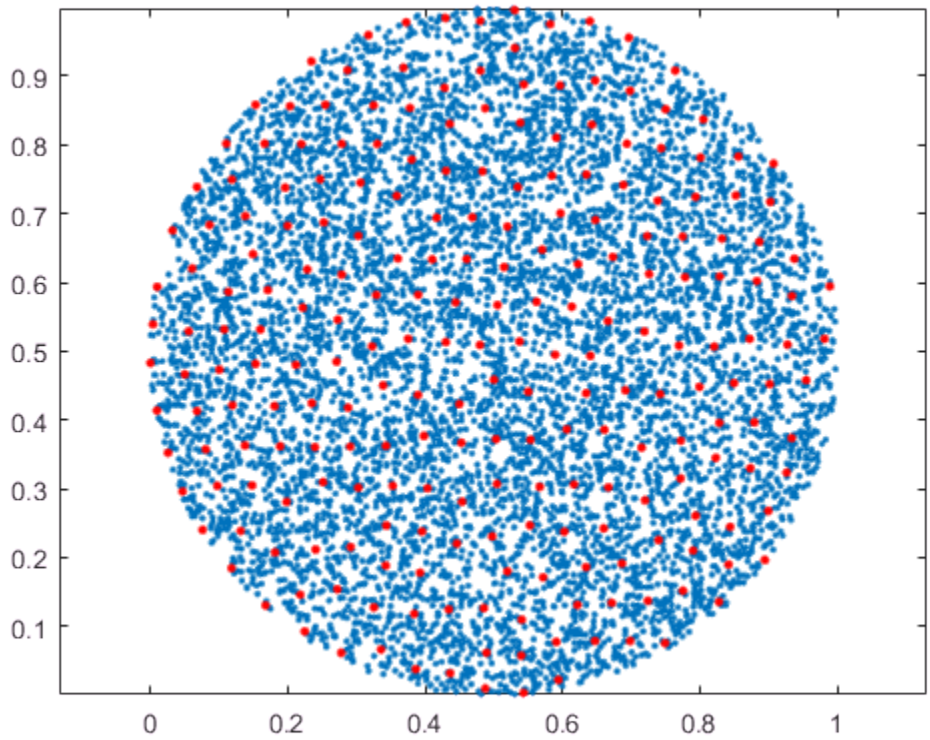

Average Similar Values in Vector

Create a vector of random numbers and determine the unique elements using a tolerance. Specify `OutputAllIndices` as `true` to return all of the indices for the elements that are within tolerance of the unique values.

```
A = rand(100,1);
[C,IA] = uniquetol(A,1e-2,'OutputAllIndices',true);
```

Find the average value of the elements that are within tolerance of the value `C(2)`.

```
C(2)
```

```
ans = 0.0318
```

```
allA = A(IA{2})
```

```
allA =

    0.0357
    0.0318
    0.0344


aveA = mean(allA)
```

```
aveA = 0.0340
```

Specify Absolute Tolerance

By default, `uniquetol` uses a tolerance test of the form `abs(u-v) <= tol*DS`, where `DS` automatically *scales* based on the magnitude of the input data. You can specify a different `DS` value to use with the `DataScale` option. However, absolute tolerances (where `DS` is a scalar) do not scale based on the magnitude of the input data.

First, compare two small values that are a distance `eps` apart. Specify `tol` and `DS` to make the within tolerance equation: `abs(u-v) <= 10^-6`.

```
x = 0.1;
uniquetol([x, exp(log(x))], 10^-6, 'DataScale', 1)
```

```
ans = 0.1000
```

Next, increase the magnitude of the values. The round-off error in the calculation `exp(log(x))` is proportional to the magnitude of the values, specifically to `eps(x)`. Even though the two large values are a distance `eps` from one another, `eps(x)` is now much larger. Therefore, `10^-6` is no longer a suitable tolerance.

```
x = 10^10;
uniquetol([x, exp(log(x))], 10^-6, 'DataScale', 1)
```

```
ans =

   1.0e+10 *
```

```
    1.0000    1.0000
```

Correct this issue by using the default (scaled) value of DS.

```
format long
Y = [0.1 10^10];
uniquetol([Y, exp(log(Y))])
```

```
ans =
   1.0e+10 *

   0.000000000010000   1.000000000000000
```

Specify DataScale by Column

Create a set of random 2-D points, then use `uniquetol` to group the points into vertical bands that have a similar (within tolerance) x-coordinate. Use these options with `uniquetol`:

- Specify `ByRows` as `true` since the point coordinates are in the rows of `A`.
- Specify `OutputAllIndices` as `true` to return the indices for all points that have an x-coordinate within tolerance of each other.
- Specify `DataScale` as `[1 Inf]` to use an absolute tolerance for the `x`-coordinate while ignoring the `y`-coordinate.

```
A = rand(1000,2);
DS = [1 Inf];
[C,IA] = uniquetol(A, 0.1, 'ByRows', true, ...
    'OutputAllIndices', true, 'DataScale', DS);
```

Plot the points and average value for each band.

```
hold on
for k = 1:length(IA)
    plot(A(IA{k},1), A(IA{k},2), '.')
    meanAi = mean(A(IA{k},:));
    plot(meanAi(1), meanAi(2), 'xr')
end
```

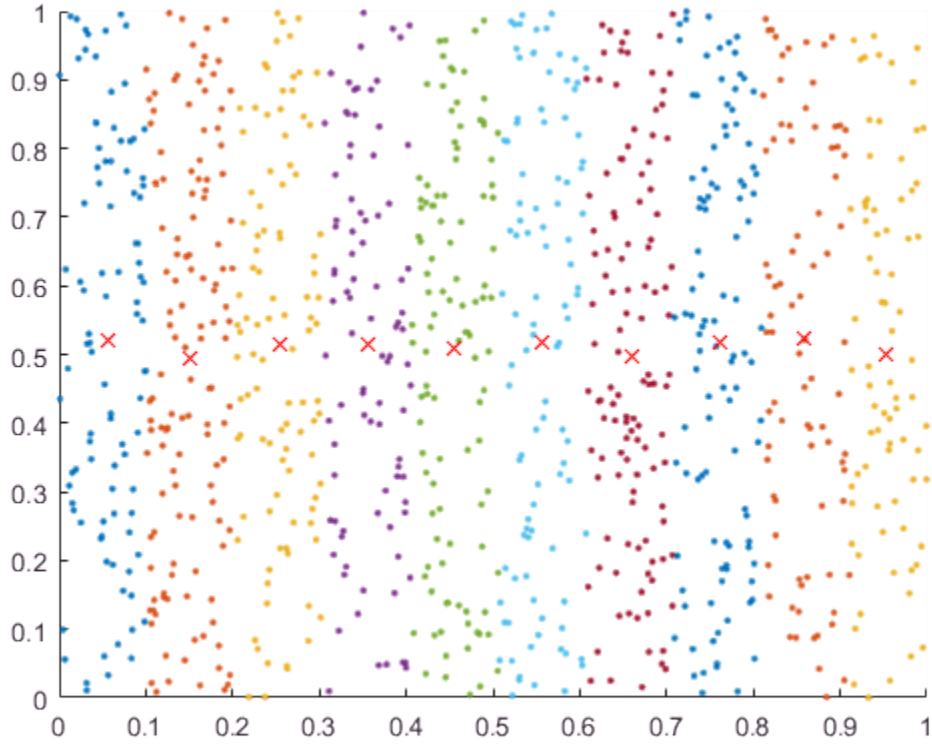

- "Average Similar Data Points Using a Tolerance"

Input Arguments

A — Query array

scalar | vector | matrix | multidimensional array

Query array, specified as a scalar, vector, matrix, or multidimensional array. A must be full.

Data Types: `single` | `double`

`tol` — Comparison tolerance

positive, real scalar

Comparison tolerance, specified as a positive, real scalar. `uniquetol` scales the `tol` input using the maximum absolute value in input array `A`. Then `uniquetol` uses the resulting scaled comparison tolerance to determine which elements in `A` are unique. If two elements in `A` are within tolerance of each other, then `uniquetol` considers them to be equal.

Two values, `u` and `v`, are within tolerance if `abs(u-v) <= tol*max(abs(A))`.

To specify an absolute tolerance, specify both `tol` and the `'DataScale'` Name-Value pair.

Example: `tol = 0.05`

Example: `tol = 1e-8`

Example: `tol = eps`

Data Types: `single` | `double`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `C = uniquetol(A,'ByRows',true)`

`'OutputAllIndices'` — Output index type

`false` (default) | `true` | `0` | `1`

Output index type, specified as the comma-separated pair consisting of `'OutputAllIndices'` and either `false` (default), `true`, `0`, or `1`. `uniquetol` interprets numeric `0` as `false` and numeric `1` as `true`.

When `OutputAllIndices` is `true`, the `uniquetol` function returns the second output, `IA`, as a cell array. The cell array contains the indices for *all* elements in `A` that are within tolerance of a value in `C`. That is, each cell in `IA` corresponds to a value in `C`, and the values in each cell correspond to locations in `A`.

Example: `[C,IA] = uniquetol(A,tol,'OutputAllIndices',true)`

`'ByRows'` — Row comparison toggle

`false` (default) | `true` | `0` | `1`

Row comparison toggle, specified as the comma-separated pair consisting of `'ByRows'` and either `false` (default), `true`, `0`, or `1`. `uniquetol` interprets numeric `0` as `false` and numeric `1` as `true`. Use this option to find rows in `A` that are unique, within tolerance.

When `ByRows` is `true`:

- `A` must be a 2-D array.
- `uniquetol` compares the rows of `A` by considering each column separately. For two rows to be within tolerance of one another, each column has to be in tolerance.
- Each row in `A` is within tolerance of a row in `C`. However, no two rows in `C` are within tolerance of each other.

Two rows, `u` and `v`, are within tolerance if `all(abs(u-v) <= tol*max(abs(A),[],1))`.

Example: `C = uniquetol(A,tol,'ByRows',true)`

`'DataScale'` — Scale of data

scalar | vector

Scale of data, specified as the comma-separated pair consisting of `'DataScale'` and either a scalar or vector. Specify `DataScale` as a numeric scalar, `DS`, to change the tolerance test to be `abs(u-v) <= tol*DS`.

When used together with the `ByRows` option, the `DataScale` value also can be a vector. In this case, each element of the vector specifies `DS` for a corresponding column in `A`. If a value in the `DataScale` vector is `Inf`, then `uniquetol` ignores the corresponding column in `A`.

Example: `C = uniquetol(A,'DataScale',1)`

Example: `[C,IA,IC] = uniquetol(A,'ByRows',true,'DataScale',[eps(1) eps(10) eps(100)])`

Data Types: `single` | `double`

Output Arguments

C — Unique elements in A

vector | matrix

Unique elements in A (within tolerance), returned as a vector or matrix. If A is a row vector, then C is also a row vector. Otherwise, C is a column vector. The elements in C are sorted in ascending order. Each element in A is within tolerance of an element in C, but no two elements in C are within tolerance of each other.

If the ByRows option is true, then C is a matrix containing the unique rows in A. In this case, the rows in C are sorted in ascending order by the first column. Each row in A is within tolerance of a row in C, but no two rows in C are within tolerance of each other.

IA — Index to A

column vector | cell array

Index to A, returned as a column vector of indices to the first occurrence of repeated elements, or as a cell array. IA generally satisfies C = A(IA), with the following exceptions:

- If the ByRows option is true, then C = A(IA,:).
- If the OutputAllIndices option is true, then IA is a cell array and C(i)~A(IA{i}) where ~ means the values are within tolerance of each other.

IC — Index to C

column vector

Index to C, returned as a column vector of indices. IC satisfies the following properties, where ~ means the values are within tolerance of each other.

- If A is a vector, then A~C(IC).
- If A is a matrix, then A(:)~C(IC).
- If the ByRows option is true, then A~C(IC,:).

Tips

- There can be multiple valid C outputs that satisfy the condition, *no two elements in C are within tolerance of each other*. The uniquetol function just returns one of the valid outputs.

`uniquetol` sorts the input lexicographically, and then starts at the lowest value to find unique values within tolerance. As a result, changing the sorting of the input could change the output. For example, `uniquetol(-A)` might not give the same results as `-uniquetol(A)`.

See Also

See Also

`eps` | `ismember` | `ismembertol` | `unique`

Topics

"Average Similar Data Points Using a Tolerance"

Introduced in R2015a

matlab.unittest

Summary of packages and classes in MATLAB Unit Test Framework

Description

The `matlab.unittest` package consists of the following classes and packages:

matlab.unittest.constraints	Summary of classes in MATLAB Constraints Interface
matlab.unittest.diagnostics	Summary of classes in MATLAB Diagnostics Interface
matlab.unittest.fixtures	Summary of classes in MATLAB Fixtures Interface
matlab.unittest.FunctionTestCase	TestCase used for function-based tests
matlab.unittest.parameters	Summary of classes associated with MATLAB Unit Test parameters
matlab.unittest.plugins	Summary of classes in MATLAB Plugins Interface
matlab.unittest.plugins.plugindata	Summary of classes in MATLAB Plugin Data Interface
matlab.unittest.qualifications	Summary of classes in MATLAB Qualifications Interface
matlab.unittest.Scope	Test scope enumeration class
matlab.unittest.selectors	Summary of classes in MATLAB Selectors Interface
matlab.unittest.Test	Specification of a single test method
matlab.unittest.TestCase	Superclass of all `matlab.unittest` test classes
matlab.unittest.TestResult	Result of running test suite
matlab.unittest.TestRunner	Class for running tests in `matlab.unittest` framework

matlab.unittest.TestSuite	Class for grouping tests to run
matlab.unittest.Verbosity	Verbosity level enumeration class

unix

Execute UNIX command and return output

Syntax

```
status = unix(command)
[status,cmdout] = unix(command)
[status,cmdout] = unix(command,'-echo')
```

Description

`status = unix(command)` calls the UNIX operating system to execute the specified command. The operation waits for the command to finish execution before returning the exit status of the command to the `status` variable.

`[status,cmdout] = unix(command)` also returns the standard output of the command to `cmdout`. This syntax is most useful for commands that do not require user input.

`[status,cmdout] = unix(command,'-echo')` also displays (echoes) the command output in the MATLAB Command Window. This syntax is most useful for commands that require user input and that run correctly in the MATLAB Command Window.

Examples

Save UNIX Command Exit Status and Output

List all users who are currently logged in, and save the command exit status and output. Then, view the status.

```
command = 'who';
[status,cmdout] = system(command);
status
```

```
status = 0
```

A `status` of zero indicates that the command completed successfully. MATLAB® returns a list of users in `cmdout`.

Input Arguments

`command` — UNIX command

character vector

UNIX command, specified as a character vector. The `command` executes in a UNIX shell, which might not be the shell from which you started MATLAB.

Example: `'ls'`

Output Arguments

`status` — Command exit status

0 | nonzero integer

Command exit status, returned as either `0` or a nonzero integer. When the command is successful, `status` is `0`. Otherwise, `status` is a nonzero integer.

- If `command` includes the ampersand character (&), then `status` is the exit status when `command` starts
- If `command` does not include the ampersand character (&), then `status` is the exit status upon `command` completion.

`cmdout` — Output of operating system command

character vector

Output of the operating system command, returned as a character vector. The system shell might not properly represent non-Unicode characters.

Limitations

- MATLAB converts characters to the encoding that your operating system shell accepts. Output from the `command` is converted to the MATLAB encoding to be displayed in the command window. If you get unexpected results from the command,

enter the `command` argument directly at the operating system prompt to see how the operating system treats your input.

Tips

- To execute the operating system command in the background, include the trailing character, `&`, in the `command` argument (for example, `'emacs &'`). The exit status is immediately returned to the `status` variable. This syntax is useful for console programs that require interactive user command input while they run, and that do not run correctly in the MATLAB Command Window.

  Note: If `command` includes the trailing `&` character, `cmdout` is empty.

- The `unix` function redirects `stdin` to the invoked command, `command`, by default. This redirection also passes MATLAB script commands and the keyboard type-ahead buffer to the invoked command while the `unix` function executes. This behavior can lead to corrupted output when `unix` does not complete execution immediately. To disable `stdin` and type-ahead redirection, include the formatted text `< /dev/null` in the call to the invoked command.

Algorithms

MATLAB uses a shell program to execute the given command. It determines which shell program to use by checking environment variables on your system. MATLAB first checks the `MATLAB_SHELL` variable, and if either empty or not defined, then checks `SHELL`. If `SHELL` is also empty or not defined, MATLAB uses `/bin/sh`.

See Also

See Also

`computer` | `dos` | `perl` | `system`

Topics

`!` (exclamation point)
"Run External Commands, Scripts, and Programs"

Introduced before R2006a

unloadlibrary

Unload shared library from memory

Syntax

```
unloadlibrary libname
```

Description

`unloadlibrary libname` unloads library `libname` from memory.

Examples

Load and Unload shrlibsample Library

Add the `shrlib` examples folder to the path.

```
addpath(fullfile(matlabroot,'extern','examples','shrlib'))
```

Load the library, if it is not already loaded.

```
if ~libisloaded('shrlibsample')
   loadlibrary('shrlibsample')
end
```

When finished, unload the library to free memory.

```
unloadlibrary shrlibsample
```

Input Arguments

`libname` — Name of shared library
character vector

Name of shared library, specified as a character vector. Do not include the path or file extension in `libname`.

If you call `loadlibrary` using the `alias` option, then you must use the alias name for the `libname` argument.

Data Types: `char`

Limitations

- Use with libraries that are loaded using the `loadlibrary` function.

Tips

- To unload a MEX file, use the `clear` function.

See Also

See Also

`clear` | `libisloaded` | `loadlibrary`

Introduced before R2006a

unmesh

Convert edge matrix to coordinate and Laplacian matrices

Syntax

```
[L,XY] = unmesh(E)
```

Description

`[L,XY] = unmesh(E)` returns the Laplacian matrix `L` and mesh vertex coordinate matrix `XY` for the `M`-by-4 edge matrix `E`. Each row of the edge matrix must contain the coordinates `[x1 y1 x2 y2]` of the edge endpoints.

Input Arguments

`E`	M-by-4 edge matrix `E`.

Output Arguments

`L`	Laplacian matrix representation of the graph.
`XY`	Mesh vertex coordinate matrix.

Examples

Take a simple example of a square with vertices at (1,1), (1,–1),(–1,–1), and (–1,1), where the connections between vertices are the four perpendicular edges of the square plus one diagonal connection between (–1, –1) and (1,1).

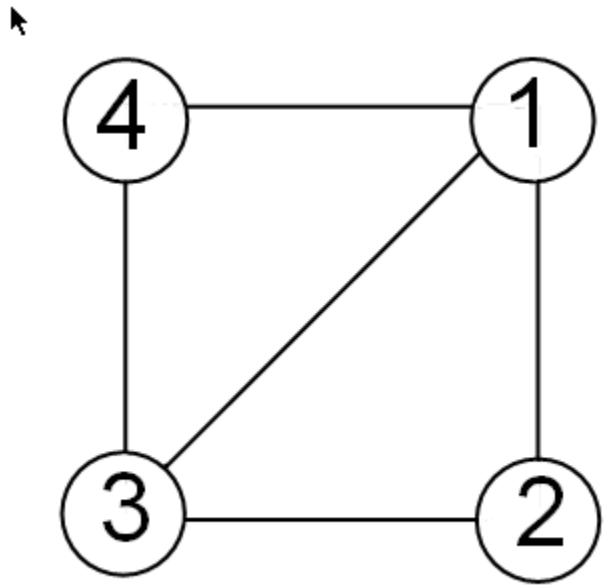

The edge matrix E for this graph is:

```
E=[1 1 1 -1;  % edge from 1 to 2
1 -1 -1 -1;   % edge from 2 to 3
-1 -1 -1 1;   % edge from 3 to 4
-1 -1 1 1;    % edge from 4 to 1
-1 1 1 1]     % edge from 3 to 1
```

Use unmesh to create the output matrices,

```
[A,XY]=unmesh(E);
4 vertices:
4/4
```

The Laplacian matrix is defined as

$$L_{ij} = \begin{cases} \deg(v_i) & \text{if } i = j \\ -1 & \text{if } i \neq j \text{ and } v_i \text{ is adjacent to } v_j \\ 0 & \text{otherwise} \end{cases}$$

unmesh returns the Laplacian matrix L in sparse notation.

```
L

L =

   (1,1)        3
   (2,1)       -1
   (3,1)       -1
   (4,1)       -1
   (1,2)       -1
   (2,2)        2
   (4,2)       -1
   (1,3)       -1
   (3,3)        2
   (4,3)       -1
   (1,4)       -1
   (2,4)       -1
   (3,4)       -1
```

To see L in regular matrix notation, use the `full` command.

```
full(L)

ans =

     3    -1    -1    -1
    -1     2     0    -1
    -1     0     2    -1
    -1    -1    -1     3
```

The mesh coordinate matrix XY returns the coordinates of the corners of the square.

```
XY

XY =

    -1    -1
    -1     1
     1    -1
     1     1
```

See Also

`gplot` | `treeplot`

unmkpp

Extract piecewise polynomial details

Syntax

```
[breaks,coefs,L,order,dim] = unmkpp(pp)
```

Description

`[breaks,coefs,L,order,dim] = unmkpp(pp)` extracts information from the fields of the piecewise polynomial structure `pp`.

Examples

Unwrap Piecewise Polynomial Information

Create a piecewise polynomial structure for the polynomial $f(x) = x^2 + x + 1$ on the interval [0 3], and then extract the information from the fields of the structure.

```
pp = mkpp([0 3],[1 1 1])
```

```
pp = struct with fields:
      form: 'pp'
    breaks: [0 3]
     coefs: [1 1 1]
    pieces: 1
     order: 3
       dim: 1
```

```
[breaks,coefs,L,order,dim] = unmkpp(pp)
```

```
breaks =

     0     3
```

```
coefs =

     1     1     1


L = 1

order = 3

dim = 1
```

Construct and Plot Piecewise Polynomial

Create two quadratic polynomials, evaluate them at several query points, and plot the results. Then create a single piecewise polynomial with four intervals that alternate between the two quadratic polynomials.

The first two plots show a quadratic polynomial and its negation shifted to the intervals [-8,-4] and [-4,0]. The polynomial is

$$1 - \left(\frac{x}{2} - 1\right)^2 = \frac{-x^2}{4} + x.$$

The last plot shows a piecewise polynomial constructed by alternating these two quadratic pieces over four intervals. It also shows its first derivative, which was constructed after breaking the piecewise polynomial apart using `unmkpp`.

```
subplot(2,2,1)
cc = [-1/4 1 0];
pp1 = mkpp([-8 -4],cc);
xx1 = -8:0.1:-4;
plot(xx1,ppval(pp1,xx1),'k-')

subplot(2,2,2)
pp2 = mkpp([-4 0],-cc);
xx2 = -4:0.1:0;
plot(xx2,ppval(pp2,xx2),'k-')

subplot(2,1,2)
pp = mkpp([-8 -4 0 4 8],[cc;-cc;cc;-cc]);
xx = -8:0.1:8;
plot(xx,ppval(pp,xx),'k-')
```

```
[breaks,coefs,l,k,d] = unmkpp(pp);
dpp = mkpp(breaks,repmat(k-1:-1:1,d*l,1).*coefs(:,1:k-1),d);
hold on
plot(xx,ppval(dpp,xx),'r-')
hold off
```

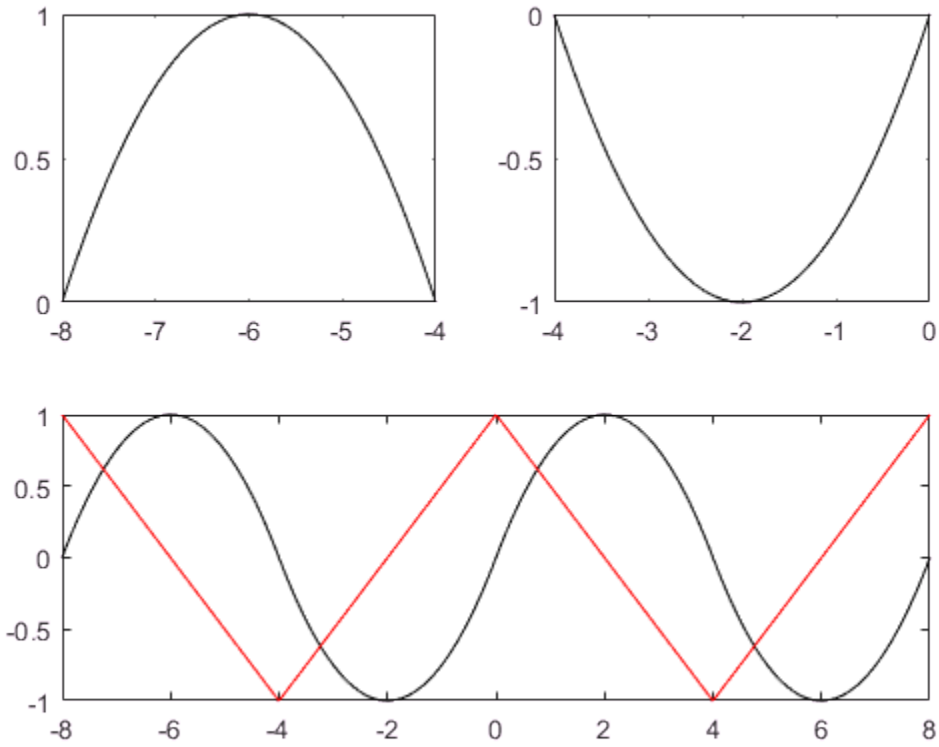

Input Arguments

pp — Piecewise polynomial
structure

Piecewise polynomial, specified as a structure. You can create `pp` using `spline`, `pchip`, or the spline utility function `mkpp`.

Output Arguments

`breaks` — Break points
vector

Break points, returned as a vector of length `L+1` with strictly increasing elements that represent the start and end of each of `L` intervals.

`coefs` — Polynomial coefficients
matrix

Polynomial coefficients, returned as an `L`-by-`k` matrix with each row `coefs(i,:)` containing the local coefficients of an order `k` polynomial on the ith interval, `[breaks(i),breaks(i+1)]`.

`L` — Number of intervals
scalar

Number of intervals, returned as a scalar.

`order` — Order of polynomials
scalar

Order of polynomials, returned as a scalar.

`dim` — Dimension of target
scalar | vector

Dimension of target, returned as a scalar or vector. `dim`

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- `pp` must be a valid piecewise polynomial structure created by `mkpp`, `spline`, or `pchip` in MATLAB or by the code generator.
- Code generation does not support `pp` structures created by `interp1` in MATLAB.

See Also

See Also

`mkpp` | `pchip` | `ppval` | `spline`

Introduced before R2006a

unregisterallevents

Unregister all event handlers associated with COM object events at run time

Syntax

```
unregisterallevents(h)
```

Description

`unregisterallevents(h)` unregisters all events previously registered with COM object `h`. After calling `unregisterallevents`, the object no longer responds to any events until you register them again using the `registerevent` function.

COM functions are available on Microsoft Windows systems only.

Examples

Register and unregister events for an instance of the `mwsamp` control, using the `eventlisteners` function to see the event handler associated with each event.

1. Register three events and their respective handler routines.

```
f = figure('position',[100 200 200 200]);
h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],f, ...
    {'Click' 'myclick'; 'DblClick' 'my2click'; 'MouseDown' 'mymoused'});
eventlisteners(h)
```

```
ans =
    'click'        'myclick'
    'dblclick'     'my2click'
    'mousedown'    'mymoused'
```

2. Unregister all events simultaneously with `unregisterallevents`. `eventlisteners` returns an empty cell array, indicating that there are no longer any events registered with the control.

```
unregisterallevents(h)
```

```
eventlisteners(h)
```

```
ans =
     {}
```

See Also

events (COM) | eventlisteners | registerevent | unregisterevent | isevent

Topics

Introduced before R2006a

unregisterevent

Unregister event handler associated with COM object event at run time

Syntax

```
unregisterevent(h,eventhandler)
```

Description

`unregisterevent(h,eventhandler)` unregisters specific event handler routines from their corresponding events. Once you unregister an event, the object no longer responds to the event.

You can unregister events at any time after creating a control. The `eventhandler` argument, which is a cell array, specifies both events and event handlers.

```
unregisterevent(h,{'event_name',@event_handler});
```

Specify events in the `eventhandler` argument using the names of the events. Character vectors used in the `eventhandler` argument are not case-sensitive. `unregisterevent` does not accept numeric event identifiers.

COM functions are available on Microsoft Windows systems only.

Examples

Unregister events for a control.

1. Create an `mwsamp` control and register all events with the same handler routine, `sampev`. Use `eventlisteners` to see the event handler used by each event. In this case, each event, when fired, calls `sampev.m`.

   ```
   f = figure('position',[100 200 200 200]);
   h = actxcontrol('mwsamp.mwsampctrl.2',[0 0 200 200],f,'sampev');
   eventlisteners(h)
   ```

```
ans =
    'Click'          'sampev'
    'DblClick'       'sampev'
    'MouseDown'      'sampev'
    'Event_Args'     'sampev'
```

2 Unregister just the `dblclick` event. Now, when you list the registered events using `eventlisteners`, `dblclick` is no longer registered and the control does not respond when you double-click the mouse over it.

```
unregisterevent(h,{'dblclick' 'sampev'})
eventlisteners(h)
```

```
ans =
    'Click'          'sampev'
    'MouseDown'      'sampev'
    'Event_Args'     'sampev'
```

3 Register the `click` and `dblclick` events with a different event handler for `myclick` and `my2click`, respectively.

```
unregisterallevents(h)
registerevent(h,{'click' 'myclick'; 'dblclick' 'my2click'});
eventlisteners(h)
```

```
ans =
    'click'        'myclick'
    'dblclick'     'my2click'
```

4 Unregister these same events by specifying event names and their handler routines in a cell array. `eventlisteners` now returns an empty cell array, meaning that no events are registered for the `mwsamp` control.

```
unregisterevent(h,{'click' 'myclick'; 'dblclick' 'my2click'})
eventlisteners(h)
```

```
ans =
     {}
```

Unregister Microsoft Excel workbook events:

1 Create a `Workbook` object and register two events with the event handler routines, `EvtActivateHndlr` and `EvtDeactivateHndlr`. MATLAB shows the events with the corresponding event handlers.

```
myApp = actxserver('Excel.Application');
```

```
wbs = myApp.Workbooks;
wb = Add(wbs);
registerevent(wb,...
    {'Activate' 'EvtActivateHndlr'; 'Deactivate' 'EvtDeactivateHndlr'})
eventlisteners(wb)

ans =
    'Activate'      'EvtActivateHndlr'
    'Deactivate'    'EvtDeactivateHndlr'
```

2 Unregister the `Deactivate` event handler. MATLAB shows the remaining registered event (`Activate`) with its corresponding event handler.

```
unregisterevent(wb,{'Deactivate' 'EvtDeactivateHndlr'})
eventlisteners(wb)

ans =
    'Activate'    'EvtActivateHndlr'
```

See Also

`events (COM)` | `eventlisteners` | `registerevent` | `unregisterallevents` | `isevent`

Topics

"COM Event Handlers"

Introduced before R2006a

unstack

Unstack data from single variable into multiple variables

Syntax

```
U = unstack(S,vars,ivar)
U = unstack(S,vars,ivar,Name,Value)
[U,is] = unstack( ___ )
```

Description

`U = unstack(S,vars,ivar)` converts the table or timetable, `S`, to an equivalent table or timetable, `U`, that is unstacked. The `unstack` function unstacks a single variable in `S`, specified by `vars`, into multiple variables in `U`. In general, `U` contains more variables, but fewer rows, than `S`.

An indicator variable in `S`, specified by `ivar`, determines which variable in `U` contains each value in `var` after it is unstacked. `unstack` treats the remaining variables in `S` as grouping variables. Each unique combination of values in the grouping variables identifies a group of rows in `S` that is unstacked into a single row of `U`.

You cannot unstack the row names of a table, or the row times of a timetable, or specify either as the indicator variable. You can specify row names or row times as constant variables with the `'ConstantVariables'` argument. Otherwise, the `unstack` function treats them as grouping variables.

`U = unstack(S,vars,ivar,Name,Value)` converts the table or timetable `S` with additional options specified by one or more `Name,Value` pair arguments.

For example, you can specify how `unstack` converts variables from `S` to variables in `U`.

`[U,is] = unstack( ___ )` also returns an index vector, `is`, indicating the correspondence between rows in `U` and rows in `S`. You can use any of the previous input arguments.

Examples

Separate One Variable into Three Variables

Create a table indicating the amount of snowfall in various towns for various storms.

```
Storm = [3;3;1;3;1;1;4;2;4;2;4;2];
Town = {'T1';'T3';'T1';'T2';'T2';'T3';...
    'T2';'T1';'T3';'T3';'T1';'T2'};
Snowfall = [0;3;5;5;9;10;12;13;15;16;17;21];
```

```
S = table(Storm,Town,Snowfall)
```

```
S = 12×3 table
    Storm    Town    Snowfall
    _____    ____    ________

    3        'T1'     0
    3        'T3'     3
    1        'T1'     5
    3        'T2'     5
    1        'T2'     9
    1        'T3'    10
    4        'T2'    12
    2        'T1'    13
    4        'T3'    15
    2        'T3'    16
    4        'T1'    17
    2        'T2'    21
```

`S` contains three snowfall entries for each storm, one for each town. `S` is in stacked format.

Separate the variable `Snowfall` into three variables, one for each town specified in the variable, `Town`. The output table, `U`, is in unstacked format.

```
U = unstack(S,'Snowfall','Town')
```

```
U = 4×4 table
    Storm    T1    T2    T3
    _____    __    __    __
```

```
    3          0     5     3
    1          5     9    10
    4         17    12    15
    2         13    21    16
```

Each row in U contains data from rows in S that have the same value in the grouping variable, Storm. The order of the unique values in Storm determines the order of the data in U.

Apply Aggregation Function to Each Group

Unstack data and apply an aggregation function to multiple rows in the same group that have the same values in the indicator variable.

Create a table containing data on the price of two stocks over 2 days.

```
Date = [repmat({'4/12/2008'},6,1);...
    repmat({'4/13/2008'},5,1)];
Stock = {'Stock1';'Stock2';'Stock1';'Stock2';...
    'Stock2';'Stock2';'Stock1';'Stock2';...
    'Stock2';'Stock1';'Stock2'};
Price = [60.35;27.68;64.19;25.47;28.11;27.98;...
    63.85;27.55;26.43;65.73;25.94];

S = table(Date,Stock,Price)
```

```
S = 11×3 table
       Date          Stock      Price
    ___________    ________    _____

    '4/12/2008'    'Stock1'    60.35
    '4/12/2008'    'Stock2'    27.68
    '4/12/2008'    'Stock1'    64.19
    '4/12/2008'    'Stock2'    25.47
    '4/12/2008'    'Stock2'    28.11
    '4/12/2008'    'Stock2'    27.98
    '4/13/2008'    'Stock1'    63.85
    '4/13/2008'    'Stock2'    27.55
    '4/13/2008'    'Stock2'    26.43
    '4/13/2008'    'Stock1'    65.73
    '4/13/2008'    'Stock2'    25.94
```

S contains two prices for STOCK1 during the first day and four prices for STOCK2 during the first day.

Create a table containing separate variables for each stock and one row for each day. Use Date as the grouping variable and apply the aggregation function, @mean, to the numeric values from the variable, Price, for each group.

```
[U,is] = unstack(S,'Price','Stock',...
    'AggregationFunction',@mean)
```

```
U = 2×3 table
       Date        Stock1    Stock2
    ___________    ______    ______

    '4/12/2008'    62.27     27.31
    '4/13/2008'    64.79     26.64


is =

     1
     7
```

U contains the average price for each stock grouped by date.

is identifies the index of the first value for each group of rows in S. The first value for the group '4/13/2008' is in the seventh row of S.

Input Arguments

S — Input table

table | timetable

Input table, specified as a table or a timetable. S must contain data variables to unstack, vars, and an indicator variable, ivars. The remaining variables in S are either grouping variables or constant variables.

vars — Variables in S to unstack

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables in S to unstack, specified as a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector.

`ivar` — Indicator variable in S
positive integer | character vector

Indicator variable in S, specified as a positive integer or a character vector. The variable specified by `ivar` indicates which variable in U each value in `var` is unstacked into.

`ivar` can be a numeric vector, logical vector, character array, cell array of character vectors, or categorical vector.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'AggregationFunction',@mean` applies the aggregation function `@mean` to the values in `vars`.

`'GroupingVariables'` — Grouping variables in S that define groups of rows
positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Grouping variables in S that define groups of rows, specified as the comma-separated pair consisting of `'GroupingVariables'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector. Each group of rows in S becomes one row in U.

The default is all the variables in S not listed in `vars` or `ivar`.

S can have row labels along its first dimension. If S is a table, then it can have row names as the labels. If S is a timetable, then it must have row times as the labels.

- You can include the row names or row times when you specify the value of `'GroupingVariables'`.
- `unstack` treats the row names or row times as grouping variables even when you do not include them in `'GroupingVariables'`.

`'ConstantVariables'` — Variables constant within a group
positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector

Variables constant within a group, specified as the comma-separated pair consisting of `'ConstantVariables'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, or logical vector. The default is no variables.

The values for these variables in `U` are taken from the first row in each group in `S`.

You can include the row names or row times of `S` when you specify the value of `'ConstantVariables'`.

`'NewDataVariableNames'` — Names for new data variables in `U`
cell array of character vectors

Names for new data variables in `U`, specified as the comma-separated pair consisting of `'NewDataVariableNames'` and a cell array of character vectors. The default is character vectors based on the values of the grouping variable specified in `ivar`.

`'AggregationFunction'` — Aggregation function from values in `vars` to single value
function handle

Aggregation function from values in `vars` to single value, specified as the comma-separated pair consisting of `'AggregationFunction'` and a function handle. `unstack` applies this function to rows from the same group that have the same value in `ivar`. The function must aggregate the data values into a single value.

For a numeric data variable, the default is `@sum`. For nonnumeric variables, there is no default function, and you must specify the `'AggregationFunction'` name-value pair argument if multiple rows in the same group have the same value in `ivar`.

Output Arguments

`U` — Output table
table | timetable

Output table, returned as a table or a timetable. `U` contains the unstacked data variables, the grouping variables, and the first value of each group from any constant variables.

The order of the data in U is based on the order of the unique values in the grouping variables.

You can store additional metadata such as descriptions, variable units, variable names, and row names in U. For more information, see Table Properties or Timetable Properties.

is — Index to S
column vector

Index to S, returned as a column vector. For each row in U, the index vector, is, identifies the index of the first value in the corresponding group of rows in S.

Definitions

Grouping Variables

Grouping variables are utility variables used to group, or categorize, data. Grouping variables are useful for summarizing or visualizing data by group. You can define groups in your table by specifying one or more grouping variables.

A grouping variable can be any of the following:

- Categorical vector
- Cell array of character vectors
- Character array
- Numeric vector, typically containing positive integers
- Logical vector

Rows that have the same grouping variable value belong to the same group. If you use multiple grouping variables, rows that have the same combination of grouping variable values belong to the same group.

Tips

- You can specify more than one data variable in S, and each variable becomes a set of unstacked data variables in U. Use a vector of positive integers, a cell array containing multiple variable names, or a logical vector to specify vars. The one

indicator variable, specified by the input argument, `ivar`, applies to all data variables specifies by `vars`.

See Also

See Also

`join` | `stack`

Introduced in R2013b

untar

Extract contents of tar file

Syntax

```
untar(tarfilename)
untar(tarfilename,outputdir)
untar(url, ___ )
filenames = untar( ___ )
```

Description

`untar(tarfilename)` extracts the archived contents of `tarfilename` into the current directory and sets the files' attributes. It overwrites any existing files with the same names as those in the archive if the existing files' attributes and ownerships permit it. For example, if you rerun `untar` on the same `tarfilename`, MATLAB software does not overwrite files with a read-only attribute; instead, `untar` displays a warning for such files. On Microsoft Windows platforms, the hidden, system, and archive attributes are not set.

`tarfilename` is the name of the tar file, specified as a character vector. `tarfilename` is gunzipped to a temporary directory and deleted if its extension ends in `.tgz` or `.gz`. If an extension is omitted, `untar` searches for `tarfilename` appended with `.tgz`, `.tar.gz`, or `.tar`. `tarfilename` can include the directory name; otherwise, the file must be in the current directory or in a directory on the MATLAB path.

`untar(tarfilename,outputdir)` uncompresses the archive `tarfilename` into the directory `outputdir`. If `outputdir` does not exist, MATLAB creates it.

`untar(url, ___ )` extracts the tar archive from an Internet URL. The URL must include the protocol type (for example, `'http://'` or `'ftp://'`). MATLAB downloads the URL to a temporary directory, and then deletes it.

`filenames = untar( ___ )` extracts the tar archive and returns the names of the extracted files in the cell array of character vectors, `filenames`. If `outputdir` specifies a relative path, `filenames` contains the relative path. If `outputdir` specifies an absolute path, `filenames` contains the absolute path.

Examples

Using tar and untar to Copy Files

Copy all `.m` files in the current directory to the directory `backup`.

```
tar('mymfiles.tar.gz','*.m');
untar('mymfiles','backup');
```

Using untar with URL

Run `untar` to list Cleve Moler's "Numerical Computing with MATLAB" examples to the output directory `ncm`.

```
url ='https://www.mathworks.com/content/dam/mathworks/mathworks-dot-com/moler/ncm.tar.g
ncmFiles = untar(url,'ncm')
```

See Also

`gzip` | `gunzip` | `tar` | `unzip` | `zip`

Introduced before R2006a

unwrap

Correct phase angles to produce smoother phase plots

Syntax

```
Q = unwrap(P)
Q = unwrap(P,tol)
Q = unwrap(P,[],dim)
Q = unwrap(P,tol,dim)
```

Description

`Q = unwrap(P)` corrects the radian phase angles in a vector `P` by adding multiples of $\pm 2\pi$ when absolute jumps between consecutive elements of `P` are greater than or equal to the default jump tolerance of π radians. If `P` is a matrix, `unwrap` operates columnwise. If `P` is a multidimensional array, `unwrap` operates on the first nonsingleton dimension.

`Q = unwrap(P,tol)` uses a jump tolerance `tol` instead of the default value, π.

`Q = unwrap(P,[],dim)` unwraps along `dim` using the default tolerance.

`Q = unwrap(P,tol,dim)` uses a jump tolerance of `tol`.

Note A jump tolerance less than π has the same effect as a tolerance of π. For a tolerance less than π, if a jump is greater than the tolerance but less than π, adding $\pm 2\pi$ would result in a jump larger than the existing one, so `unwrap` chooses the current point. If you want to eliminate jumps that are less than π, try using a finer grid in the domain.

Examples

Example 1

The following phase data comes from the frequency response of a third-order transfer function. The phase curve jumps `3.5873` radians between `w = 3.0` and `w = 3.5`, from `-1.8621` to `1.7252`.

```
w = [0:.2:3,3.5:1:10];
p = [    0
     -1.5728
     -1.5747
     -1.5772
     -1.5790
     -1.5816
     -1.5852
     -1.5877
     -1.5922
     -1.5976
     -1.6044
     -1.6129
     -1.6269
     -1.6512
     -1.6998
     -1.8621
      1.7252
      1.6124
      1.5930
      1.5916
      1.5708
      1.5708
      1.5708 ];
semilogx(w,p,'b*-'), hold
```

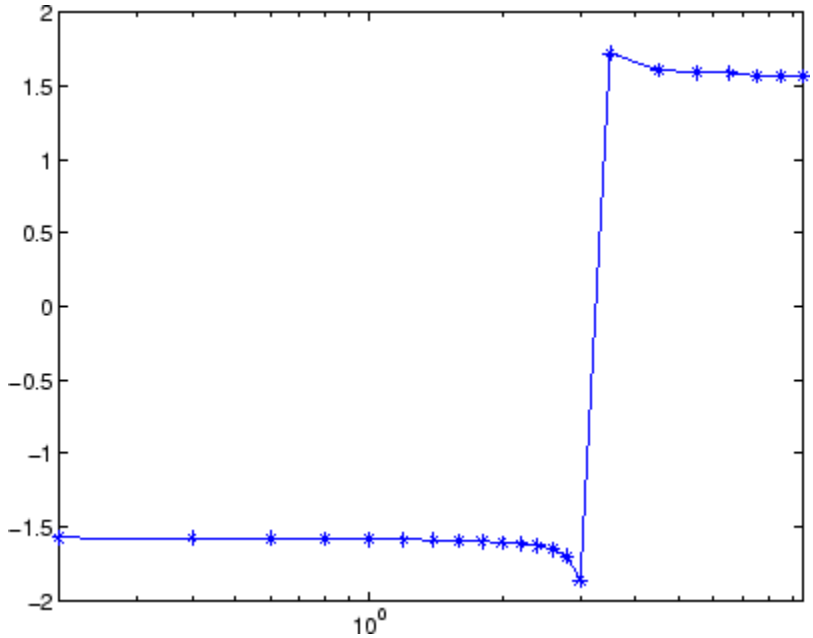

Using `unwrap` to correct the phase angle, the resulting jump is `2.6959`, which is less than the default jump tolerance π. This figure plots the new curve over the original curve.

```
semilogx(w,unwrap(p),'r*-')
```

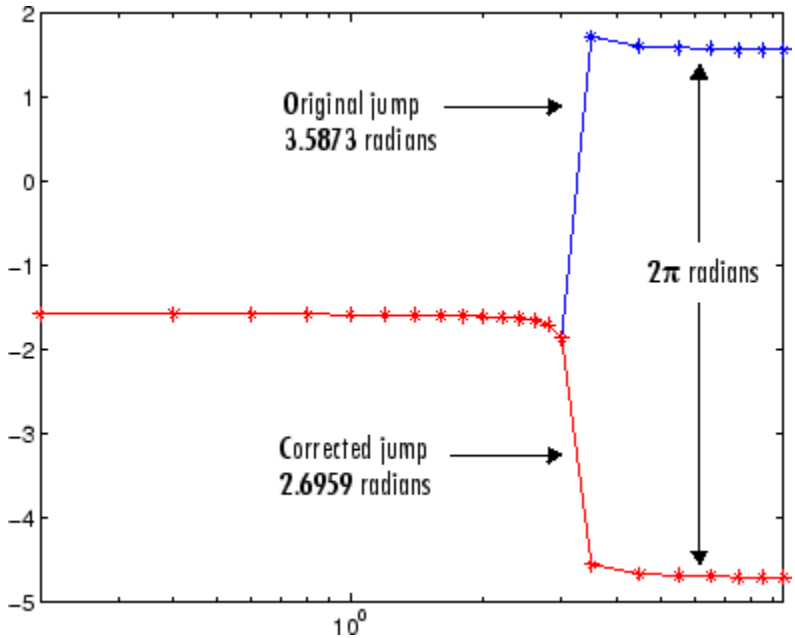

Example 2

Array `P` features smoothly increasing phase angles except for discontinuities at elements `(3,1)` and `(1,2)`.

```
P = [       0    7.0686    1.5708    2.3562
       0.1963    0.9817    1.7671    2.5525
       6.6759    1.1781    1.9635    2.7489
       0.5890    1.3744    2.1598    2.9452 ]
```

The function `Q = unwrap(P)` eliminates these discontinuities.

```
Q =
            0    7.0686    1.5708    2.3562
       0.1963    7.2649    1.7671    2.5525
       0.3927    7.4613    1.9635    2.7489
       0.5890    7.6576    2.1598    2.9452
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Row vector input is only supported when the first two inputs are vectors and nonscalar.
- Performs arithmetic in the output class. Therefore, results might not match MATLAB due to different rounding errors.

See Also

`abs` | `angle`

Introduced before R2006a

unzip

Extract contents of zip file

Syntax

```
unzip(zipfilename)
unzip(zipfilename,outputdir)
filenames = unzip(zipfilename,outputdir)
```

Description

`unzip(zipfilename)` extracts the archived contents of `zipfilename` into the current folder, preserving the files' attributes and timestamps. The `unzip` function can extract files from your local system or files from an Internet URL.

`unzip(zipfilename,outputdir)` extracts the contents of `zipfilename` into the folder `outputdir`.

`filenames = unzip(zipfilename,outputdir)` returns the names of the extracted files in the cell array of character vectors, `filenames`. Specifying `outputdir` is optional.

Input Arguments

`zipfilename`

Name of the zip file, specified as a character vector.

If `zipfilename` does not include the full path, `unzip` searches for the file in the current folder and along the MATLAB path. If you do not specify the file extension, `unzip` appends `.zip`.

If you are downloading a URL, `zipfilename` must include the protocol type (for example, `http://`). The `unzip` function downloads the URL to the temporary folder on your system, and deletes the URL on cleanup.

outputdir

Target folder for the extracted files, specified as a character vector.

Default: current folder (`'.'`)

Output Arguments

entrynames

Cell array of character vectors that contains the paths of the extracted files.

If `outputdir` specifies a relative path, `filenames` contains the relative path. If `outputdir` specifies an absolute path, `filenames` contains the absolute path.

Examples

Copy the example MAT-files to the folder `archive`:

```
% Zip the example MAT-files to examples.zip
zip('examples.zip','*.mat',...
    fullfile(matlabroot,'toolbox','matlab','demos'))

% Unzip examples.zip to the folder 'archive'
unzip('examples','archive')
```

Download Cleve Moler's "Numerical Computing with MATLAB" examples to the output folder `ncm`:

```
url ='https://www.mathworks.com/content/dam/mathworks/mathworks-dot-com/moler/ncm.zip'
ncmFiles = unzip(url,'ncm')
```

Tips

- `unzip` does not support password-protected or encrypted zip archives.
- If any files in the target folder have the same name as files in the zip file, and you have write permission to the files, `unzip` overwrites the existing files with the archived versions. If you do not have write permission, `unzip` issues a warning.

- Extract files that contain non-7-bit ASCII characters on a machine that has the appropriate language/encoding settings.

Alternatives

To extract files from a zip file using the Current Folder browser, select the zip file, right-click to open the context menu, and then select **Extract**.

See Also

`gzip` | `gunzip` | `tar` | `untar` | `zip` | `fileattrib`

Introduced before R2006a

uplus, +

Unary plus

Syntax

```
C = +A
C = uplus(A)
```

Description

`C = +A` returns array `A` and stores it in `C`.

`C = uplus(A)` is an alternate way to execute `+A`, but is rarely used. It enables operator overloading for classes.

Examples

Unary Plus of Matrix

Create a 2-by-2 matrix, `A`.

```
A = [1 -3; -2 4]
```

```
A =

     1    -3
    -2     4
```

Use unary plus on `A`.

```
C = +A
```

```
C =

     1    -3
    -2     4
```

`C` and `A` are the same.

Input Arguments

A — Input array

scalar | vector | matrix | multidimensional array

Input array, specified as a scalar, vector, matrix, or multidimensional array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`
Complex Number Support: Yes

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`plus` | `uminus`

Topics

"Array vs. Matrix Operations"
"Operator Precedence"
"MATLAB Operators and Special Characters"

Introduced before R2006a

upper

Convert string to uppercase

Syntax

```
newTxt = upper(txt)
```

Description

`newTxt = upper(txt)` converts all lowercase characters in `txt` to the corresponding uppercase characters and leaves all other characters unchanged.

Examples

Convert Character Vector to Uppercase

```
txt = 'Hello, World.';
newTxt = upper(txt)
```

```
newTxt =
'HELLO, WORLD.'
```

Convert String Array to Uppercase

Starting in R2017a, you can create string arrays using double quotes instead of the `string` function.

Convert a string array to contain uppercase characters.

```
txt = ["The SOONER,";"the BETTER."]
```

```
txt = 2×1 string array
    "The SOONER,"
    "the BETTER."
```

```
newTxt = upper(txt)
```

```
newTxt = 2×1 string array
    "THE SOONER,"
    "THE BETTER."
```

Text processing functions, such as `strfind` and `regexp`, accept string arrays as inputs. Other functions, such as `addpath`, do not.

- "Create Character Arrays"
- "Create String Arrays"
- "Analyze Text Data with String Arrays"
- "Search and Replace Text"

Input Arguments

`txt` — Input array

string array | character array | cell array of character vectors

Input array, specified as a string array, character array, or cell array of character vectors.

Example:

Data Types: `string` | `char` | `cell`

Tips

For character arrays, the `upper` function supports the character sets:

- PC: Windows Latin-1
- Other: ISO Latin-1 (ISO 8859-1)

For string arrays, the `upper` function supports Unicode.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- Input array must be a character array. Cell arrays are not supported.
- Supports only inputs from the `char` class. Does not support cell arrays.
- Input values must be in the range 0-127.

See Also

See Also

`char` | `isstrprop` | `lower` | `reverse` | `string`

Topics

“Create Character Arrays”
“Create String Arrays”
“Analyze Text Data with String Arrays”
“Search and Replace Text”

Introduced before R2006a

urlread

Download URL content to character vector (not recommended)

Compatibility

`urlread` is not recommended. Use `webread` or `webwrite` instead.

Syntax

```
str = urlread(URL)
str = urlread(URL,Name,Value)
[str,status] = urlread( ___ )
```

Description

`str = urlread(URL)` downloads the HTML web content from the specified `URL` into the character vector `str`. `urlread` does not retrieve hyperlink targets and images.

`str = urlread(URL,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments.

`[str,status] = urlread( ___ )` suppresses the display of error messages, using any of the input arguments in the previous syntaxes. When the operation is successful, `status` is `1`. Otherwise, `status` is `0`

Examples

Download Web Content by Specifying Complete URL

Download the HTML for the page on the MATLAB® Central File Exchange that lists submissions related to `urlread`.

```
fullURL = ['http://www.mathworks.com/matlabcentral/fileexchange' ...
```

```
    '?term=urlread'];
str = urlread(fullURL);
```

`urlread` reads from the specified URL and downloads the HTML content to the character vector `str`.

Download Web Content Related to Term

Download the HTML for the page on the MATLAB® Central File Exchange that lists submissions related to `urlread`.

```
URL = 'http://www.mathworks.com/matlabcentral/fileexchange';
str = urlread(URL,'Get',{'term','urlread'});
```

`urlread` reads from http://www.mathworks.com/matlabcentral/fileexchange/?term=urlread and downloads the HTML content to the character vector `str`.

Specify Timeout Duration

Download content from a page on the MATLAB® Central File Exchange as in the first example, and specify a timeout duration of 5 seconds.

```
fullURL = ['http://www.mathworks.com/matlabcentral/fileexchange' ...
    '?term=urlread'];
str = urlread(fullURL,'Timeout',5);
```

Input Arguments

URL — Content location

character vector

Content location, specified as a character vector. Include the transfer protocol, such as `http`, `ftp`, or `file`.

Example: `'http://www.mathworks.com/matlabcentral'`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (' '). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Timeout',10,'Charset','UTF-8'` specifies that `urlread` should time out after 10 seconds, and the character encoding of the file is UTF-8.

`'Get'` — Data to send to the web form using the GET method
cell array

Parameters of the data to send to the web form using the GET method, specified as the comma-separated pair consisting of `'get'` and a cell array of paired parameter names and values. The supported parameters depend upon the URL.

`'Get'` includes the data in the URL, separated by `?` and `&` characters.

Example: `'Get',{'term','urlread'}`

`'Post'` — Data to send to the web form using the POST method
cell array

Parameters of the data to send to the web form using the POST method, specified as the comma-separated pair consisting of `'post'` and a cell array of paired parameter names and values. The supported parameters depend upon the URL.

`'Post'` submits the data as part of the request headers, not explicitly in the URL.

`'Charset'` — Character encoding
character vector

Character encoding, specified as the comma-separated pair consisting of `'Charset'` and a character vector. If you do not specify `Charset`, the function attempts to determine the character encoding from the headers of the file. If the character encoding cannot be determined, `Charset` defaults to the native encoding for the file protocol, and UTF-8 for all other protocols.

Example: `'Charset','ISO-8859-1'`

`'Timeout'` — Timeout duration
scalar

Timeout duration in seconds, specified as the comma-separated pair consisting of `'Timeout'` and a scalar. The timeout duration determines when the function errors rather than continues to wait for the server to respond or send data.

Example: `'Timeout',10`

`'UserAgent'` — Client user agent identification

character vector

Client user agent identification, specified as the comma-separated pair consisting of `'UserAgent'` and a character vector.

Example: `'UserAgent','MATLAB R2012b'`

`'Authentication'` — HTTP authentication mechanism

`'Basic'`

HTTP authentication mechanism, specified as the comma-separated pair consisting of `'Authentication'` and a character vector. Currently, only the value `'Basic'` is supported. `'Authentication','Basic'` specifies basic authentication.

If you include the `Authentication` argument, you must also include the `Username` and `Password` arguments.

`'Username'` — User identifier

character vector

User identifier, specified as the comma-separated pair consisting of `'Username'` and a character vector. If you include the `Username` argument, you must also include the `Password` and `Authentication` arguments.

Example: `'Username','myName'`

`'Password'` — User authentication password

character vector

User authentication password, specified as the comma-separated pair consisting of `'Password'` and a character vector. If you include the `Password` argument, you must also include the `Username` and `Authentication` arguments.

Example: `'Password','myPassword123'`

Output Arguments

`str` — Contents of the file at the specified URL

character vector

Contents of the file at the specified URL, returned as a character vector. For example, if the URL corresponds to an HTML page, `str` contains the text and markup in the HTML file. If the URL corresponds to a binary file, `str` is not readable.

`status` — Download status
`1` | `0`

Download status, returned as either `1` or `0`. When the download is successful, `status` is `1`. Otherwise, `status` is `0`.

Tips

- `urlread` saves web content to a character vector. To save content to a file, use `urlwrite`.
- `urlread` and `urlwrite` can download content from FTP sites. Alternatively, use the `ftp` function to connect to an FTP server and the `mget` function to download a file.

See Also

See Also
ftp | mget | `urlwrite` | `web` | `webread` | `webwrite`

Topics
"Specify Proxy Server Settings for Connecting to the Internet"

Introduced before R2006a

urlwrite

Download URL content and save to file (not recommended)

Compatibility

`urlwrite` is not recommended. Use `websave` instead.

Syntax

```
urlwrite(URL,filename)
urlwrite(URL,filename,Name,Value)
```

```
[filestr,status] = urlwrite( ___ )
```

Description

`urlwrite(URL,filename)` reads web content at the specified `URL` and saves it to the file specified by `filename`.

`urlwrite(URL,filename,Name,Value)` uses additional options specified by one or more `Name,Value` pair arguments.

`[filestr,status] = urlwrite( ___ )` stores the file path in variable `filestr`, and suppresses the display of error messages, using any of the input arguments in the previous syntaxes. When the operation is successful, `status` is `1`. Otherwise, `status` is `0`.

Examples

Download Web Content by Specifying Complete URL

Download the HTML for the page on the MATLAB® Central File Exchange that lists submissions related to `urlwrite`. Save the results to `samples.html` in the current folder.

```
fullURL = ['http://www.mathworks.com/matlabcentral/fileexchange' ...
           '?term=urlwrite'];
filename = 'samples.html';
urlwrite(fullURL,filename);
```

View the file.

```
web(filename)
```

Download Web Content Related to Term

Download the HTML for the page on the MATLAB® Central File Exchange that lists submissions related to `urlwrite`. Save the results to `samples.html` in the current folder.

```
URL = 'http://www.mathworks.com/matlabcentral/fileexchange';
filename = 'samples.html';
urlwrite(URL,filename,'get',{'term','urlwrite'});
```

`urlwrite` downloads the HTML content from http://www.mathworks.com/matlabcentral/fileexchange/?term=urlwrite and writes it to `samples.html`.

Specify Timeout Duration

Download content from a page on the MATLAB® Central File Exchange as in the first example, and specify a timeout duration of 5 seconds.

```
fullURL = ['http://www.mathworks.com/matlabcentral/fileexchange' ...
    '?term=urlwrite'];
filename = 'samples.html';
urlwrite(fullURL,filename,'Timeout',5);
```

Input Arguments

URL — Content location

character vector

Content location, specified as a character vector. Include the transfer protocol, such as `http`, `ftp`, or `file`.

Example: `'http://www.mathworks.com/matlabcentral'`

filename — Name of file to store web content

character vector

Name of the file to store the web content, specified as a character vector. If you do not specify the path for `filename`, `urlwrite` saves the file in the current folder.

Example: `'myfile.html'`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Timeout',10,'Charset','UTF-8'` specifies that `urlread` should time out after 10 seconds, and the character encoding of the file is UTF-8.

`'Get'` — Data to send to the web form using the GET method

cell array

Parameters of the data to send to the web form using the GET method, specified as the comma-separated pair consisting of `'get'` and a cell array of paired parameter names and values. The supported parameters depend upon the URL.

`'Get'` includes the data in the URL, separated by `?` and `&` characters.

Example: `'Get',{'term','urlread'}`

`'Post'` — Data to send to the web form using the POST method

cell array

Parameters of the data to send to the web form using the POST method, specified as the comma-separated pair consisting of `'post'` and a cell array of paired parameter names and values. The supported parameters depend upon the URL.

`'Post'` submits the data as part of the request headers, not explicitly in the URL.

`'Charset'` — Character encoding

character vector

Character encoding, specified as the comma-separated pair consisting of `'Charset'` and a character vector. If you do not specify `Charset`, the function attempts to determine the character encoding from the headers of the file. If the character encoding cannot be determined, `Charset` defaults to the native encoding for the file protocol, and UTF-8 for all other protocols.

Example: `'Charset','ISO-8859-1'`

`'Timeout'` — Timeout duration
scalar

Timeout duration in seconds, specified as the comma-separated pair consisting of `'Timeout'` and a scalar. The timeout duration determines when the function errors rather than continues to wait for the server to respond or send data.

Example: `'Timeout',10`

`'UserAgent'` — Client user agent identification
character vector

Client user agent identification, specified as the comma-separated pair consisting of `'UserAgent'` and a character vector.

Example: `'UserAgent','MATLAB R2012b'`

`'Authentication'` — HTTP authentication mechanism
`'Basic'`

HTTP authentication mechanism, specified as the comma-separated pair consisting of `'Authentication'` and a character vector. Currently, only the value `'Basic'` is supported. `'Authentication','Basic'` specifies basic authentication.

If you include the `Authentication` argument, you must also include the `Username` and `Password` arguments.

`'Username'` — User identifier
character vector

User identifier, specified as the comma-separated pair consisting of `'Username'` and a character vector. If you include the `Username` argument, you must also include the `Password` and `Authentication` arguments.

Example: `'Username','myName'`

`'Password'` — User authentication password
character vector

User authentication password, specified as the comma-separated pair consisting of `'Password'` and a character vector. If you include the `Password` argument, you must also include the `Username` and `Authentication` arguments.

Example: `'Password','myPassword123'`

Output Arguments

`filestr` — Path of the file

character vector

Path of the file specified by `filename`, returned as a character vector.

`status` — Download status

`1` | `0`

Download status, returned as either `1` or `0`. When the download is successful, `status` is `1`. Otherwise, `status` is `0`.

Tips

- `urlread` and `urlwrite` can download content from FTP sites. Alternatively, use the `ftp` function to connect to an FTP server and the `mget` function to download a file.

See Also

See Also

ftp | mget | `urlread` | `web` | `websave`

Topics

"Specify Proxy Server Settings for Connecting to the Internet"

Introduced before R2006a

usejava

Determine if Java feature is available

Syntax

```
tf = usejava(feature)
```

Description

`tf = usejava(feature)` returns logical `1` (`true`) if the specified feature is supported. Otherwise, it returns logical `0` (`false`). If the Java feature is unavailable, then you can use this function for error handling.

Examples

Display Error Message

Use the following code snippet to test that the AWT GUI components are available before attempting to display a Java Frame. If the AWT is not available on your system, MATLAB displays the message `Unable to open a Java Frame`.

```
if usejava('awt')
   myFrame = java.awt.Frame;
else
   disp('Unable to open a Java Frame')
end
```

Call error Function

Use the following code snippet to terminate a script if MATLAB does not have access to JVM software.

The variable, `filename`, is a function that contains Java code.

```
if ~usejava('jvm')
   error([filename ' requires Java to run.'])
```

```
end
```

Input Arguments

`feature` — Java feature

`'awt' | 'desktop' | 'jvm' | 'swing'`

Java feature, specified as one of these values:

`'awt'`	UI components in the Java Abstract Window Toolkit (AWT) are available.
`'desktop'`	MATLAB interactive desktop is running.
`'jvm'`	Java Virtual Machine software (JVM) is running.
`'swing'`	Swing components (Java lightweight UI components in the Java Foundation Classes) are available.

See Also

See Also

`error` | `javachk`

Topics

"Java Class Path"

Introduced before R2006a

userpath

View or change default user work folder

Syntax

```
userpath
```

```
userpath(newpath)
userpath('reset')
userpath('clear')
```

Description

`userpath` returns the first folder on the search path, specified as a character vector. MATLAB adds the folder specified by `userpath` to the search path at startup.

`userpath(newpath)` sets the first folder on the search path to `newpath`. The folder specified using `userpath` appears at the top of the search path immediately, and at startup in future sessions. MATLAB removes the folder previously specified by `userpath` from the search path.

`userpath('reset')` sets the first folder on the search path to the default for your platform. The default *`userpath`* folder is platform-specific.

- Windows platforms — `%USERPROFILE%/Documents/MATLAB`.
- Mac platforms — `$home/Documents/MATLAB`.
- Linux platforms — `$home/Documents/MATLAB` if `$home/Documents` exists.

MATLAB immediately adds the default folder to the top of the search path, and also adds it to the search path at startup in future sessions. On Windows and Mac platforms, the default folder is created if it does not exist. On Linux, the default folder is not created if it does not exist.

`userpath('clear')` removes the first folder from the search path immediately, and for future MATLAB sessions.

Examples

View *userpath* Folder

This example assumes the *userpath* folder is set to the default value `Documents\MATLAB` on the Windows platform. Start MATLAB and display the current folder:

```
pwd
```

```
H:\Documents\MATLAB
```

In this example, `H` is the drive at which `Documents` is located.

Confirm that the current folder is the *userpath* folder.

```
userpath
```

```
H:\Documents\MATLAB
```

Display the search path. MATLAB returns the search path. The folder specified by `userpath` is at the top.

```
path
```

```
MATLABPATH

 H:\Documents\MATLAB
 C:\Program Files\MATLAB\R2009a\toolbox\matlab\general
 C:\Program Files\MATLAB\R2009a\toolbox\matlab\ops
...
```

Set New Value for *userpath*

Assume the *userpath* folder is set to the default value on the Windows platform, `Documents\MATLAB`.

Change the value from the default to `C:\Research_Project`.

```
newpath = 'C:\Research_Project';
userpath(newpath)
```

View the effect of the change on the search path.

```
path
```

```
MATLABPATH

 C:\Research_Project
 C:\Program Files\MATLAB\R2009a\toolbox\matlab\general
 C:\Program Files\MATLAB\R2009a\toolbox\matlab\ops
...
```

MATLAB displays the search path, with the folder specified by `userpath` at the top. MATLAB automatically removes the previous value of the *`userpath`* folder, `H:\Documents\MATLAB`, from the search path when you assign a new folder using `userpath`.

Clear the Value for *`userpath`*

Assume that the *`userpath`* folder is set to the default value, but you do not want it to be added to the search path at startup.

Confirm that the default is set.

```
userpath
```

```
H:\Documents\MATLAB;
```

Verify that it is at the top of the search path.

```
path
```

```
MATLABPATH

H:\Documents\MATLAB
C:\Program Files\MATLAB\R2009a\toolbox\matlab\general
C:\Program Files\MATLAB\R2009a\toolbox\matlab\ops
...
```

Clear the value.

```
userpath('clear')
```

Verify the result.

```
userpath
```

```
ans =
     ''
```

Confirm that the former *`userpath`* folder is removed from the search path.

```
path

MATLABPATH

C:\Program Files\MATLAB\R2009a\toolbox\matlab\general
C:\Program Files\MATLAB\R2009a\toolbox\matlab\ops
...
```

Note: If you use `userpath('clear')`, the startup folder will not necessarily be on the search path. This can also occur if you remove the *`userpath`* folder from the search path and save the changes.

Input Arguments

`newpath` — New value for the userpath folder

character vector

New value for the *`userpath`* folder, specified as a character vector. `newpath` must be an absolute path.

Example: `'C:\myFolder'`

Tips

- To specify the startup folder, set the **Initial working folder** preference, described in "General Preferences".
- You can automatically add subfolders to the top of the search path at startup by specifying the path for the subfolders via the `MATLABPATH` environment variable.

See Also

See Also

`addpath` | `path` | `rmpath` | `savepath` | `startup`

Topics

"What Is the MATLAB Search Path?"

"MATLAB Startup Folder"

Introduced in R2008a

ValueIterator

An iterator over intermediate values for use with mapreduce

Description

The `mapreduce` function automatically creates a `ValueIterator` object during execution and uses it to store the values associated with each unique intermediate key added by the map function. Although you never need to explicitly create a `ValueIterator` object to use `mapreduce`, you do need to interact with this object in the reduce function. Use the `hasnext` and `getnext` object functions to retrieve the values associated with each unique key in the intermediate `KeyValueStore` object.

Create Object

The `mapreduce` function automatically creates `ValueIterator` objects during execution.

Properties

`Key` — Intermediate key

numeric scalar | character vector

This property is read-only.

Intermediate key, specified as a numeric scalar or character vector. `Key` is one of the unique keys added by a map function. All the values in the `ValueIterator` object are associated with this key.

Object Functions

hasnext	Determine if ValueIterator has one or more values available
getnext	Get next value from ValueIterator

Examples

Get Values from ValueIterator in Reduce Function

Use the `hasnext` and `getnext` functions in a `while` loop within the reduce function to iteratively get values from the `ValueIterator`. For example,

```
function MeanDistReduceFun(sumLenKey, sumLenIter, outKVStore)
    sumLen = [0, 0];
    while hasnext(sumLenIter)
        sumLen = sumLen + getnext(sumLenIter);
    end
    add(outKVStore, 'Mean', sumLen(1)/sumLen(2));
end
```

Always call `hasnext` before `getnext` to confirm availability of a value. `mapreduce` returns an error if you call `getnext` with no remaining values in the `ValueIterator`.

See Also

See Also

`mapreduce`

Topics

"Getting Started with MapReduce"
KeyValueStore

Introduced in R2014b

validateattributes

Check validity of array

Syntax

```
validateattributes(A,classes,attributes)
validateattributes(A,classes,attributes,argIndex)
validateattributes(A,classes,attributes,funcName)
validateattributes(A,classes,attributes,funcName,varName)
validateattributes(A,classes,attributes,funcName,varName,argIndex)
```

Description

`validateattributes(A,classes,attributes)` validates that array `A` belongs to at least one of the specified classes (or its subclass) and has all of the specified attributes. If `A` does not meet the criteria, MATLAB throws an error and displays a formatted error message. Otherwise, `validateattributes` completes without displaying any output.

`validateattributes(A,classes,attributes,argIndex)` includes the position of the input in your function argument list as part of any generated error messages.

`validateattributes(A,classes,attributes,funcName)` includes the specified function name in generated error identifiers.

`validateattributes(A,classes,attributes,funcName,varName)` includes the specified variable name in generated error messages.

`validateattributes(A,classes,attributes,funcName,varName,argIndex)` includes the specified information in generated error messages or identifiers.

Examples

Validate the Size of an Array

```
classes = {'numeric'};
attributes = {'size',[4,6,2]};
```

```
A = rand(3,5,2);
validateattributes(A,classes,attributes)
```

```
Expected input to be of size 4x6x2 when it is actually size 3x5x2.
```

Because A did not match the specified attributes, MATLAB throws an error message.

Validate Array Monotonicity

Determine if an array is increasing or nondecreasing.

```
A = [1 5 8 2;
     9 6 9 4]
validateattributes(A, {'double'},{'nondecreasing'})
validateattributes(A, {'double'},{'increasing'})
```

```
A =

     1     5     8     2
     9     6     9     4
```

Since A is both increasing and nondecreasing, `validateattributes` does not throw an error for either attribute check.

Setting `A(2,3)` equal to `A(1,3)` results in a column that is no longer strictly increasing, so `validateattributes` throws an error.

```
A(2,3) = 8
validateattributes(A, {'double'},{'increasing'})
```

```
A =

     1     5     8     2
     9     6     8     4

Expected input to be increasing valued.
```

However, the columns remain nondecreasing since each column element is equal to or greater than the next. The following code does not throw an error.

```
validateattributes(A, {'double'},{'nondecreasing'})
```

Check the Attributes of a Complex Number

Assuming that a is to be the second input argument to a function, check that it is nonnegative.

```
a = complex(1,1);
validateattributes(a,{'numeric'},{'nonnegative'},2)
```

```
Expected input number 2 to be nonnegative.
```

Because complex numbers lack a well-defined ordering in the complex plane, `validateattributes` does not recognize them as positive or negative.

Ensure Array Values Are Within a Specified Range

Check that the values in an array are 8-bit integers between 0 and 10.

Assume that this code occurs in a function called `Rankings`.

```
classes = {'uint8','int8'};
attributes = {'>',0,'<',10};
funcName = 'Rankings';
A = int8(magic(4));

validateattributes(A,classes,attributes,funcName)
```

```
Error using Rankings
Expected input to be an array with all of the values < 10.
```

Validate Function Input Parameters Using `inputParser`

Create a custom function that checks input parameters with `inputParser`, and use `validateattributes` as the validating function for the `addRequired` and `addOptional` methods.

Define the function.

```
function a = findArea(shape,dim1,varargin)
   p = inputParser;
   charchk = {'char'};
   numchk = {'numeric'};
   nempty = {'nonempty'};

   addRequired(p,'shape',@(x)validateattributes(x,charchk,nempty))
   addRequired(p,'dim1',@(x)validateattributes(x,numchk,nempty))
   addOptional(p,'dim2',1,@(x)validateattributes(x,numchk,nempty))
   parse(p,shape,dim1,varargin{:})

   switch shape
      case 'circle'
```

```
            a = pi * dim1.^2;
        case 'rectangle'
            a = dim1 .* p.Results.dim2;
    end
end
```

Call the function with a nonnumeric third input.

```
myarea = findArea('rectangle',3,'x')
```

```
Error using findArea (line 10)
Argument 'dim2' failed validation with error:
Expected input to be one of these types:

double, single, uint8, uint16, uint32, uint64, int8, int16, int32, int64

Instead its type was char.
```

Validate Arguments of a Function

Check the inputs of a function and include information about the input name and position in generated error.

Define the function.

```
function v = findVolume(shape,ht,wd,ln)
   validateattributes(shape,{'char'},{'nonempty'},mfilename,'Shape',1)
   validateattributes(ht,{'numeric'},{'nonempty'},mfilename,'Height',2)
   validateattributes(wd,{'numeric'},{'nonempty'},mfilename,'Width',3)
   validateattributes(ln,{'numeric'},{'nonempty'},mfilename,'Length',4)
```

Call the function without the `shape` input argument.

```
vol = findVolume(10,7,4)
```

```
Error using findVolume
Expected input number 1, Shape, to be one of these types:

char

Instead its type was double.

Error in findVolume (line 2)
validateattributes(shape,{'char'},{'nonempty'},mfilename,'Shape',1)
```

The function name becomes part of the error identifier.

```
MException.last.identifier
```

```
ans =

MATLAB:findVolume:invalidType
```

Input Arguments

A — Input

any type of array

Input, specified as any type of array.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `struct` | `cell` | `function_handle`
Complex Number Support: Yes

`classes` — Valid data types

cell array of character vectors | string vector

Valid data types, specified as a cell array of character vectors or a string vector. Each element of `classes` can be the name of any built-in or custom class, including:

`'single'`	Single-precision number
`'double'`	Double-precision number
`'int8'`	Signed 8-bit integer
`'int16'`	Signed 16-bit integer
`'int32'`	Signed 32-bit integer
`'int64'`	Signed 64-bit integer
`'uint8'`	Unsigned 8-bit integer
`'uint16'`	Unsigned 16-bit integer
`'uint32'`	Unsigned 32-bit integer
`'uint64'`	Unsigned 64-bit integer
`'logical'`	Logical `1` (`true`) or `0` (`false`)
`'char'`	Character
`'string'`	String array

`'struct'`	Structure array
`'cell'`	Cell array
`'table'`	Table
`'function_handle'`	Function handle

`'numeric'`	Any data type for which the `isa(A,'numeric')` function returns true, including `int8`, `int16`, `int32`, `int64`, `uint8`, `uint16`, `uint32`, `uint64`, `single`, or `double`
`'<class_name>'`	Any other class name

Data Types: `cell` | `string`

`attributes` — Valid attributes

cell array

Valid attributes, specified as a cell array.

Some attributes also require numeric values, such as attributes that specify the size or number of elements of `A`. For these attributes, the numeric value or vector must immediately follow the attribute name in the cell array.

Attributes that describe the size and shape of array `A`:

`'2d'`	Two-dimensional array, including scalars, vectors, matrices, and empty arrays
`'3d'`	Array with three or fewer dimensions
`'column'`	Column vector, `N`-by-1
`'row'`	Row vector, 1-by-`N`
`'scalar'`	Scalar value, 1-by-1
`'scalartext'`	Either a string scalar or a character vector
`'vector'`	Row or column vector, or a scalar value
`'size', [d1,...,dN]`	Array with dimensions `d1`-by-...-by-`dN`. To skip checking a particular dimension, specify `NaN` for that dimension, such as `[3,4,NaN,2]`.
`'numel', N`	Array with `N` elements

`'ncols', N`	Array with `N` columns
`'nrows', N`	Array with `N` rows
`'ndims', N`	`N`-dimensional array
`'square'`	Square matrix; in other words, a two-dimensional array with equal number of rows and columns
`'diag'`	Diagonal matrix
`'nonempty'`	No dimensions that equal zero
`'nonsparse'`	Array that is not sparse

Attributes that specify valid ranges for values in `A`:

`'>', N`	All values greater than `N`
`'>=', N`	All values greater than or equal to `N`
`'<', N`	All values less than `N`
`'<=', N`	All values less than or equal to `N`

Attributes that check types of values in a numeric or logical array, `A`:

`'binary'`	Array of ones and zeros
`'even'`	Array of even integers (includes zero)
`'odd'`	Array of odd integers
`'integer'`	Array of integer values
`'real'`	Array of real values
`'finite'`	Array of finite values
`'nonnan'`	No NaN (Not a Number) elements
`'nonnegative'`	No elements less than zero
`'nonzero'`	No elements equal to zero
`'positive'`	No elements less than or equal to zero
`'decreasing'`	Each element of a column is less than the previous element and no element is `NaN`
`'increasing'`	Each element of a column is greater than the previous element and no element is `NaN`

`'nondecreasing'`	Each element of a column is greater than or equal to the previous element and no element is `NaN`
`'nonincreasing'`	Each element of a column is less than or equal to the previous element and no element is `NaN`

Data Types: `cell`

`funcName` — Name of function whose input you are validating

character vector | string scalar

Name of function whose input you are validating, specified as a character vector or as a string scalar. If you specify an empty character vector, `''`, or the `<missing>` string, the `validateattribute` function ignores the `funcName` input.

Data Types: `char` | `string`

`varName` — Name of input variable

character vector | string scalar

Name of input variable, specified as a character vector or a string scalar. If you specify an empty character vector, `''`, or the `<missing>` string, the `validateattribute` function ignores the `varName` input.

Data Types: `char` | `string`

`argIndex` — Position of input argument

positive integer

Position of input argument, specified as a positive integer.

Data Types: `double`

See Also

See Also

inputParser | `is*` | `isa` | `isnumeric` | `validatestring`

Introduced in R2007b

validatestring

Check validity of text

Syntax

```
validStr = validatestring(str,validStrings)
validStr = validatestring(str,validStrings,argIndex)
validStr = validatestring(str,validStrings,funcName)
validStr = validatestring(str,validStrings,funcName,varName)
validStr = validatestring(str,validStrings,funcName,varName,
argIndex)
```

Description

`validStr = validatestring(str,validStrings)` checks the validity of `str`. If `str` is an unambiguous, case-insensitive match to any text in `validStrings`, the `validatestring` function returns the matching text as `validstr`. Otherwise, MATLAB throws an error and issues a formatted error message.

`validStr = validatestring(str,validStrings,argIndex)` includes the position of the input in your function argument list as part of any generated error messages.

`validStr = validatestring(str,validStrings,funcName)` includes the specified function name in generated error identifiers.

`validStr = validatestring(str,validStrings,funcName,varName)` includes the specified variable name in generated error messages.

`validStr = validatestring(str,validStrings,funcName,varName, argIndex)` includes the specified information in generated error messages or identifiers.

Input Arguments

`str`

Text to validate. `str` can be a character vector or a string scalar.

validStrings

Text to match. validStrings can be a cell array of character vectors or a string array.

funcName

Character vector or string scalar that specifies the name of the function whose input you are validating. If you specify an empty character vector, '' or the <missing> string, the validatestring function ignores the funcname input.

varName

Character vector or string scalar that specifies the name of the input variable. If you specify an empty character vector, '' or the <missing> string, the validatestring function ignores the varName input.

argIndex

Positive integer that specifies the position of the input argument.

Output Arguments

validStr

Character vector or string scalar that contains the element of validStrings that is an unambiguous, case-insensitive match to str. The output validStr is the same type as the input str.

Example — Match 'ball' with . . .	Return Value	Type of Match
ball, barn, bell	ball	Exact match
balloon, barn	balloon	Partial match (leading characters)
ballo, balloo, balloon	ballo (shortest match)	Multiple partial matches where each character vector is a subset of another
balloon, ballet	Error	Multiple partial matches to unique character vectors
barn, bell	Error	No match

Examples

Check whether a character vector is in a set of valid values.

```
str = 'won';
validStrings = {'wind','wonder','when'};

validStr = validatestring(str,validStrings)
```

Because `str` is a partial match to a unique character vector, this code returns

```
validStr =

wonder
```

However, if `str` is a partial match to multiple character vectors, and the character vectors are not subsets of each other, `validatestring` throws an error and displays a formatted message.

```
str = 'won';
validStrings = {'wonder','wondrous','wonderful'};

validStr = validatestring(str,validStrings)
```

The error message is

```
Expected input to match one of these strings:

'wonder', 'wondrous', 'wonderful'

The input, won, matched more than one valid string.
```

Check inputs to a custom function, and include information about the input name and position in generated errors.

```
function a = findArea(shape,ht,wd,units)
   a = 0;
   expectedShapes = {'square','rectangle','triangle'};
   expectedUnits = {'cm','m','in','ft','yds'};

   shapeName = validatestring(shape,expectedShapes,mfilename,'Shape',1)
   unitAbbrev = validatestring(units,expectedUnits,mfilename,'Units',4)
```

When you call the function with valid input character vectors,

```
myarea = findArea('rect',10,3,'cm')
```

the function stores the inputs in local variables `shapeName` and `unitAbbrev`:

```
shapeName =

rectangle


unitAbbrev =

cm


myarea =

     0
```

However, if the inputs are not valid, such as

```
myarea = findArea('circle',10,3,'cm')
```

MATLAB displays

```
Error using findArea (line 6)
Expected input number 1, Shape, to match one of these strings:

'square', 'rectangle', 'triangle'

The input, 'circle', did not match any of the valid strings.
```

The function name is part of the error identifier, so

```
MException.last.identifier
```

returns

```
MATLAB:findArea:unrecognizedStringChoice
```

See Also

`validateattributes` | `is*` | `isa` | inputParser

values

Class: containers.Map
Package: containers

Identify values in `containers.Map` object

Syntax

```
valueSet = values(mapObj)
valueSet = values(mapObj,keySet)
```

Description

`valueSet = values(mapObj)` returns all of the values in `mapObj`.

`valueSet = values(mapObj,keySet)` returns values that correspond to the specified keys.

Input Arguments

`mapObj`

Object of class containers.Map.

`keySet`

Cell array that specifies keys in `mapObj`.

Output Arguments

`valueSet`

Cell array containing values from `mapObj`. If you specify `keySet`, the `valueSet` array has the same size and dimensions as `keySet`.

Examples

Get All Values in a Map

Create a map, and view all values in the map:

```
myKeys = {'a','b','c'};
myValues = [1,2,3];
mapObj = containers.Map(myKeys,myValues);

valueSet = values(mapObj)
```

This code returns 1-by-3 cell array `valueSet`:

```
valueSet =

    [1]    [2]    [3]
```

Get Selected Values in a Map

View the values corresponding to keys `a` and `c` in `mapObj`, created in the previous example:

```
keySet = {'a','c'};
valueSet = values(mapObj,keySet)
```

This code returns 1-by-2 cell array `valueSet`:

```
valueSet =

    [1]    [3]
```

See Also

keys | isKey | containers.Map

vander

Vandermonde matrix

Syntax

```
A = vander(v)
```

Description

`A = vander(v)` returns the "Vandermonde Matrix" on page 1-12246 such that its columns are powers of the vector `v`.

Examples

Find the Vandermonde Matrix for Vector Input

Use the colon operator to create vector `v`. Find the Vandermonde matrix for `v`.

```
v = 1:.5:3
```

```
v =

    1.0000    1.5000    2.0000    2.5000    3.0000
```

```
A = vander(v)
```

```
A =

    1.0000    1.0000    1.0000    1.0000    1.0000
    5.0625    3.3750    2.2500    1.5000    1.0000
   16.0000    8.0000    4.0000    2.0000    1.0000
   39.0625   15.6250    6.2500    2.5000    1.0000
   81.0000   27.0000    9.0000    3.0000    1.0000
```

Find the alternate form of the Vandermonde matrix using `fliplr`.

```
A = fliplr(vander(v))
```

```
A =

    1.0000    1.0000    1.0000    1.0000    1.0000
    1.0000    1.5000    2.2500    3.3750    5.0625
    1.0000    2.0000    4.0000    8.0000   16.0000
    1.0000    2.5000    6.2500   15.6250   39.0625
    1.0000    3.0000    9.0000   27.0000   81.0000
```

Input Arguments

v — Input
numeric vector

Input, specified as a numeric vector.

Data Types: `single` | `double`
Complex Number Support: Yes

Definitions

Vandermonde Matrix

For input vector $v = \begin{bmatrix} v_1 & v_2 & \dots & v_N \end{bmatrix}$, the Vandermonde matrix is

$$\begin{bmatrix} v_1^{N-1} & \cdots & v_1^1 & v_1^0 \\ v_2^{N-1} & \cdots & v_2^1 & v_2^0 \\ & \iddots & \vdots & \vdots \\ v_N^{N-1} & & v_N^1 & v_N^0 \end{bmatrix}$$

The matrix is described by the formula $A(i,j) = v(i)^{(N-j)}$ such that its columns are powers of the vector `v`.

An alternate form of the Vandermonde matrix flips the matrix along the vertical axis, as shown. Use `fliplr(vander(v))` to return this form.

$$\begin{bmatrix} v_1^0 & v_1^1 & \cdots & v_1^{N-1} \\ v_2^0 & v_2^1 & \cdots & v_2^{N-1} \\ \vdots & \vdots & \ddots & \\ v_N^0 & v_N^1 & & v_N^{N-1} \end{bmatrix}$$

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`gallery` | `hilb` | `mpower` | `pascal` | `power` | `rosser` | `toeplitz`

Introduced before R2006a

var

Variance

Syntax

```
V = var(A)
V = var(A,w)
V = var(A,w,dim)
V = var( ___ ,nanflag)
```

Description

`V = var(A)` returns the variance of the elements of `A` along the first array dimension whose size does not equal 1.

- If `A` is a vector of observations, the variance is a scalar.
- If `A` is a matrix whose columns are random variables and whose rows are observations, `V` is a row vector containing the variances corresponding to each column.
- If `A` is a multidimensional array, then `var(A)` treats the values along the first array dimension whose size does not equal 1 as vectors. The size of this dimension becomes `1` while the sizes of all other dimensions remain the same.
- The variance is normalized by the number of observations`-1` by default.
- If `A` is a scalar, `var(A)` returns `0`. If `A` is a `0`-by-`0` empty array, `var(A)` returns `NaN`.

`V = var(A,w)` specifies a weighting scheme. When `w = 0` (default), `V` is normalized by the number of observations`-1`. When `w = 1`, it is normalized by the number of observations. `w` can also be a weight vector containing nonnegative elements. In this case, the length of `w` must equal the length of the dimension over which `var` is operating.

`V = var(A,w,dim)` returns the variance along the dimension `dim`. To maintain the default normalization while specifying the dimension of operation, set `w = 0` in the second argument.

`V = var( ___ ,nanflag)` specifies whether to include or omit `NaN` values from the calculation for any of the previous syntaxes. For example, `var(A,'includenan')` includes all `NaN` values in `A` while `var(A,'omitnan')` ignores them.

Examples

Variance of Matrix

Create a matrix and compute its variance.

```
A = [4 -7 3; 1 4 -2; 10 7 9];
var(A)
```

```
ans =

   21.0000   54.3333   30.3333
```

Variance of Array

Create a 3-D array and compute its variance.

```
A(:,:,1) = [1 3; 8 4];
A(:,:,2) = [3 -4; 1 2];
var(A)
```

```
ans =

(:,:,1) =

   24.5000    0.5000


(:,:,2) =

     2    18
```

Specify Variance Weight Vector

Create a matrix and compute its variance according to a weight vector `w`.

```
A = [5 -4 6; 2 3 9; -1 1 2];
w = [0.5 0.25 0.25];
var(A,w)
```

```
ans =
```

```
    6.1875    9.5000    6.1875
```

Specify Dimension for Variance

Create a matrix and compute its variance along the first dimension.

```
A = [4 -2 1; 9 5 7];
var(A,0,1)
```

```
ans =

   12.5000   24.5000   18.0000
```

Compute the variance of A along the second dimension.

```
var(A,0,2)
```

```
ans =

     9
     4
```

Variance Excluding NaN

Create a vector and compute its variance, excluding NaN values.

```
A = [1.77 -0.005 3.98 -2.95 NaN 0.34 NaN 0.19];
V = var(A,'omitnan')
```

```
V = 5.1970
```

Input Arguments

A — Input array
vector | matrix | multidimensional array

Input array, specified as a vector, matrix, or multidimensional array.

Data Types: `single` | `double`

Complex Number Support: Yes

w — Weight

0 (default) | 1 | vector

Weight, specified as one of:

- 0 — normalizes by the number of observations-1. If there is only one observation, the weight is 1.
- 1 — normalizes by the number of observations.
- a vector made up of nonnegative scalar weights corresponding to the dimension of A along which the variance is calculated.

Data Types: single | double

dim — Dimension to operate along

positive integer scalar

Dimension to operate along, specified as a positive integer scalar. If no value is specified, then the default is the first array dimension whose size does not equal 1.

Dimension dim indicates the dimension whose length reduces to 1. The size(V,dim) is 1, while the sizes of all other dimensions remain the same.

Consider a two-dimensional input array, A.

- If dim = 1, then var(A,0,1) returns a row vector containing the variance of the elements in each column.



var(A,0,1)

- If `dim = 2`, then `var(A,0,2)` returns a column vector containing the variance of the elements in each row.

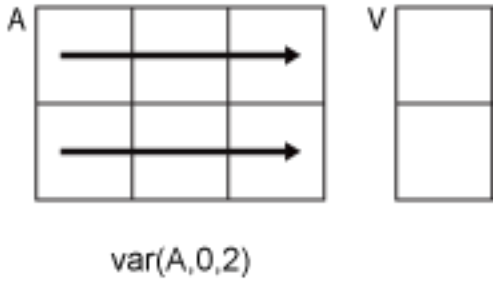

`var` returns an array of zeros the same size as `A` when `dim` is greater than `ndims(A)`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`nanflag` — `NaN` condition
`'includenan'` (default) | `'omitnan'`

`NaN` condition, specified as one of these values:

- `'includenan'` — the variance of input containing `NaN` values is also `NaN`.
- `'omitnan'` — all `NaN` values appearing in either the input array or weight vector are ignored.

Data Types: `char`

Definitions

Variance

For a random variable vector A made up of N scalar observations, the variance is defined as

$$V = \frac{1}{N-1}\sum_{i=1}^{N}|A_i - \mu|^2$$

where μ is the mean of A,

$$\mu = \frac{1}{N}\sum_{i=1}^{N} A_i.$$

Some definitions of variance use a normalization factor of *N* instead of *N-1*, which can be specified by setting `w` to `1`. In either case, the mean is assumed to have the usual normalization factor *N*.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitation:

The weighting scheme cannot be a vector.

For more information, see “Tall Arrays”.

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- If specified, `dim` must be a constant.
- See “Variable-Sizing Restrictions for Code Generation of Toolbox Functions” (MATLAB Coder).

See Also

See Also

`corrcoef` | `cov` | `mean` | `std`

Introduced before R2006a

varargin

Variable-length input argument list

Syntax

```
varargin
```

Description

`varargin` is an input variable in a function definition statement that allows the function to accept any number of input arguments. Specify `varargin` using lowercase characters, and include it as the last input argument after any explicitly declared inputs. When the function executes, `varargin` is a 1-by-*N* cell array, where *N* is the number of inputs that the function receives after the explicitly declared inputs. However, if the function receives no inputs after the explicitly declared inputs, `varargin` is an empty cell array.

Examples

Variable Number of Function Inputs

Define a function in a file named `varlist.m` that accepts a variable number of inputs and displays the values of each input.

```
function varlist(varargin)
   fprintf('Number of arguments: %d\n',nargin)
   celldisp(varargin)
```

Call `varlist` with several inputs.

```
varlist(ones(3),'some text',pi)
```

```
Number of arguments: 3

varargin{1} =
     1     1     1
     1     1     1
     1     1     1
```

```
varargin{2} =
some text

varargin{3} =
    3.1416
```

varargin and Declared Inputs

Define a function in a file named `varlist2.m` that expects inputs `X` and `Y`, and accepts a variable number of additional inputs.

```
function varlist2(X,Y,varargin)
   fprintf('Total number of inputs = %d\n',nargin);

   nVarargs = length(varargin);
   fprintf('Inputs in varargin(%d):\n',nVarargs)
   for k = 1:nVarargs
      fprintf('   %d\n', varargin{k})
   end
```

Call `varlist2` with more than two inputs.

```
varlist2(10,20,30,40,50)
```

```
Total number of inputs = 5
Inputs in varargin(3):
   30
   40
   50
```

- "Support Variable Number of Inputs"

See Also

See Also

`inputname` | `nargin` | `narginchk` | `nargout` | `nargoutchk` | `varargout`

Topics

"Support Variable Number of Inputs"
"Argument Checking in Nested Functions"

Introduced before R2006a

varargout

Variable-length output argument list

Syntax

```
varargout
```

Description

`varargout` is an output variable in a function definition statement that allows the function to return any number of output arguments. Specify `varargout` using lowercase characters, and include it as the last output argument after any explicitly declared outputs. When the function executes, `varargout` is a 1-by-*N* cell array, where *N* is the number of outputs requested after the explicitly declared outputs.

Examples

Variable Number of Function Outputs

Define a function in a file named `sizeout.m` that returns an output size vector `s` and a variable number of additional scalar values.

```
function [s,varargout] = sizeout(x)
nout = max(nargout,1) - 1;
s = size(x);
for k = 1:nout
   varargout{k} = s(k);
end
```

Output `s` contains the dimensions of the input array `x`. Additional outputs correspond to the individual dimensions within `s`.

Call `sizeout` on a three-dimensional array and request three outputs.

```
[s,rows,cols] = sizeout(rand(4,5,2))
```

```
s =
```

```
     4     5     2

rows =
     4

cols =
     5
```

See Also

varargin | nargin | nargout | nargoutchk | narginchk | inputname

Introduced before R2006a

varfun

Apply function to table or timetable variables

Syntax

```
B = varfun(func,A)
B = varfun(func,A,Name,Value)
```

Description

`B = varfun(func,A)` applies the function `func` separately to each variable of the table or timetable `A` and returns the results in the table or timetable `B`.

The function `func` must take one input argument and return arrays with the same number of rows each time it is called. The `i`th variable in the output argument, `B{:,i}`, is equal to `func(A{:,i})`.

If `A` is a timetable and `func` aggregates data over groups of rows, then `varfun` assigns the first row time from each group of rows in `A` as the corresponding row time in `B`. To return `B` as a table without row times, specify `'OutputFormat'` as `'table'`.

`B = varfun(func,A,Name,Value)` applies the function `func` separately to each variable of the table or timetable `A` with additional options specified by one or more `Name,Value` pair arguments.

For example, you can specify which variables to pass to the function.

Examples

Apply Element-wise Function

Define and apply an element-wise function to the variables of a table to square all the elements.

Define a table containing numeric variables.

```
A = table([0.71;-2.05;-0.35;-0.82;1.57],[0.23;0.12;-0.18;0.23;0.41])
```

```
A = 5×2 table
    Var1     Var2
    _____    _____

     0.71     0.23
    -2.05     0.12
    -0.35    -0.18
    -0.82     0.23
     1.57     0.41
```

Define the anonymous function to find the square of an input.

```
func = @(x) x.^2;
```

Apply the function to all the variables of table A.

```
B = varfun(func,A)
```

```
B = 5×2 table
    Fun_Var1    Fun_Var2
    ________    ________

    0.5041      0.0529
    4.2025      0.0144
    0.1225      0.0324
    0.6724      0.0529
    2.4649      0.1681
```

The variables of B have names based on the function and the variable names from A.

Apply Function that Returns Scalar From Vector

Compute the mean of each variable in a 5-by-2 table.

Define a table containing numeric variables.

```
A = table([0.71;-2.05;-0.35;-0.82;1.57],[0.23;0.12;-0.18;0.23;0.41])
```

```
A = 5×2 table
    Var1     Var2
```

```
    _____    _____

     0.71     0.23
    -2.05     0.12
    -0.35    -0.18
    -0.82     0.23
     1.57     0.41
```

Define the anonymous function to find the mean of an input.

```
func = @mean;
```

`func` uses an existing MATLAB® function to define the operation.

Apply the function to all the variables of table `A`.

```
B = varfun(func,A)
```

```
B = 1×2 table
    mean_Var1    mean_Var2
    _________    _________

    -0.188       0.162
```

`B` is a table containing the average value from each variable. To return a numeric vector instead of a table, you can use `B = varfun(func,A,'OutputFormat','uniform')`.

Apply Function to Groups Within Variables

Compute the group-wise means of variables in a table, `A`, and return them as rows in a table, `B`.

Create a table where one variable defines groups.

```
A = table({'test2';'test1';'test2';'test3';'test1'},...
    [0.71;-2.05;-0.35;-0.82;1.57],[0.23;0.12;-0.18;0.23;0.41])
```

```
A = 5×3 table
     Var1      Var2     Var3
    _______    _____    _____
```

```
    'test2'     0.71     0.23
    'test1'    -2.05     0.12
    'test2'    -0.35    -0.18
    'test3'    -0.82     0.23
    'test1'     1.57     0.41
```

Define the anonymous function to find the mean of an input.

```
func = @mean;
```

`func` uses an existing MATLAB® function to define the operation.

Apply the function to each group of data defined by `Var1`.

```
B = varfun(func,A,'GroupingVariables','Var1')
```

```
B = 3×4 table
     Var1      GroupCount    mean_Var2    mean_Var3
    _______    __________    _________    _________

    'test1'    2             -0.24        0.265
    'test2'    2              0.18        0.025
    'test3'    1             -0.82         0.23
```

`B` contains a variable called `GroupCount` to indicate the number of entries from table `A` in that group.

Apply Function to Groups Within Timetable Variables

Create a timetable containing sample data. The row times of the timetable also define groups.

```
dt = datetime(2016,1,1)+days([0 1 1 2 3 3])';
A = timetable(dt,[0.71;-2.05;-0.35;-0.82;1.57;0.09],...
              [0.23;0.12;-0.18;0.23;0.41;0.02],...
              'VariableNames',{'x' 'y'})
```

```
A = 6×2 timetable
            Time                x         y
    ____________________     _____     _____

    01-Jan-2016 00:00:00     0.71      0.23
```

```
    02-Jan-2016 00:00:00    -2.05     0.12
    02-Jan-2016 00:00:00    -0.35    -0.18
    03-Jan-2016 00:00:00    -0.82     0.23
    04-Jan-2016 00:00:00     1.57     0.41
    04-Jan-2016 00:00:00     0.09     0.02
```

Compute the group-wise means of the variables in the timetable. `varfun` returns `B` as a timetable because `A` is a timetable. When you specify the row times as the grouping variable, you cannot specify any variable as another grouping variable.

```
B = varfun(@mean,A,'GroupingVariables','Time')
```

```
B = 4×3 timetable
            Time            GroupCount    mean_x    mean_y
    ____________________    __________    ______    ______

    01-Jan-2016 00:00:00    1              0.71      0.23
    02-Jan-2016 00:00:00    2              -1.2     -0.03
    03-Jan-2016 00:00:00    1             -0.82      0.23
    04-Jan-2016 00:00:00    2              0.83     0.215
```

- "Calculations on Tables"
- "Split Table Data Variables and Apply Functions"

Input Arguments

`func` — Function
function handle

Function, specified as a function handle. You can define the function in a file or as an anonymous function. If `func` corresponds to more than one function file (that is, if `func` represents a set of overloaded functions), MATLAB determines which function to call based on the class of the input arguments.

Use the `'OutputFormat','cell'` name-value pair argument, if the function `func` take one input argument and returns arrays with a different numbers of rows each time it is called. Otherwise, `func` must return arrays with the same number of rows.

Example: `func = @(x) x.^2;` computes the square of each element of an input.

A — Input table

table | timetable

Input table, specified as a table or a timetable.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'InputVariables',2` uses only the second variable in `A` as an input to `func`.

`'InputVariables'` — Specifiers for selecting variables of `A` to pass to `func`

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector | function handle

Specifiers for selecting variables of `A` to pass to `func`, specified as the comma-separated pair consisting of `'InputVariables'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, logical vector, or a function handle.

If you specify `'InputVariables'` as a function handle, then it must return a logical scalar, and `varfun` passes only the variables in `A` where the function returns `1` (`true`).

`'GroupingVariables'` — One or more variables in `A` that define groups of rows

positive integer | vector of positive integers | character vector | cell array of character vectors | logical vector | categorical vector | datetime vector | duration vector

One or more variables in `A` that define groups of rows, specified as the comma-separated pair consisting of `'GroupingVariables'` and a positive integer, vector of positive integers, character vector, cell array of character vectors, logical vector, categorical vector, datetime vector, or duration vector.

Rows in `A` that have the same grouping variable values belong to the same group. `varfun` applies `func` to each group of rows within each of the variables of `A`, rather than to each entire variable.

Row labels can be grouping variables. You can group on row labels alone, on one or more variables in `A`, or on row labels and variables together.

- If `A` is a table, then the labels are row names.

- If A is a timetable, then the labels are row times.

The output, B, has one row for each group when you specify `'OutputFormat','uniform'` or `'OutputFormat','cell'`. When you specify `'OutputFormat','table'` or `'OutputFormat','timetable'`, the sizes of the outputs from `func` determine how many rows of B correspond to each group.

`'OutputFormat'` — Format of B

`'table'` (default) | `'timetable'` | `'uniform'` | `'cell'`

Format of B, specified as the comma-separated pair consisting of `'OutputFormat'` and either the value `'uniform'`, `'table'`, `'timetable'`, or `'cell'`.

`'table'`	`varfun` returns a table with one variable for each variable in A (or each variable specified with `'InputVariables'`). For grouped computation, B, also contains the grouping variables. `'table'` allows you to use a function that returns values of different sizes or data types for the different variables in A. However, for ungrouped computation, `func` must return arrays with the same number of rows each time it is called. For grouped computation, `func` must return values with the same number of rows each time it is called for a given group. If A is a table, then this is the default output format.
`'timetable'`	`varfun` returns a timetable with one variable for each variable in A (or each variable specified with `'InputVariables'`). For grouped computation, B also contains the grouping variables. `varfun` creates the row times of B from the row times of A. If the row times assigned to B do not make sense in the context of the calculations performed using `func`, then specify the output format as `'OutputFormat','table'`. If A is a timetable, then this is the default output format.
`'uniform'`	`varfun` concatenates the values into a vector. `func` must return a scalar with the same data type each time it is called.
`'cell'`	`varfun` returns B as a cell array. `'cell'` allows you to use a function that returns values of different sizes or data types.

`'ErrorHandler'` — Function to call if `func` fails

function handle

Function to call if `func` fails, specified as the comma-separated pair consisting of `'ErrorHandler'` and a function handle. Define this function so that it rethrows the error or returns valid outputs for function `func`.

MATLAB calls the specified error-handling function with two input arguments:

- A structure with these fields:

`identifier`	Error identifier.
`message`	Error message text.
`index`	Index of the variable for which the error occurred.
`name`	Name of the variable for which the error occurred.

- The set of input arguments to function `func` at the time of the error.

For example,

```
function [A, B] = errorFunc(S, varargin)
warning(S.identifier, S.message)
A = NaN; B = NaN;
```

Output Arguments

`B` — Output table

table | timetable

Output table, returned as a table or a timetable. `B` can store metadata such as descriptions, variable units, variable names, and row names. For more information, see Table Properties or Timetable Properties.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function supports tall arrays with the limitations:

- The `func` input must always return a tall array.
- Supported name-value pairs are:
  - `'InputVariables'` — Cannot be specified as a function handle.
  - `'OutputFormat'` — Value can be `'uniform'`, `'table'`, `'timetable'`, or `'cell'` only.
- When the input array is a tall timetable and `'OutputFormat'` is `'timetable'`, the specified function must return an array with the same size in the first dimension as the input. Specify `'OutputFormat'` as `'table'` when the input function is a reduction function such as `mean`.

For more information, see "Tall Arrays".

See Also

See Also

`arrayfun` | `cellfun` | `findgroups` | `rowfun` | `splitapply` | `structfun`

Topics

"Calculations on Tables"
"Split Table Data Variables and Apply Functions"
"Anonymous Functions"

Introduced in R2013b

vartype

Subscript into table or timetable by variable type

Syntax

```
S = vartype(type)
```

Description

`S = vartype(type)` creates a subscript to select table variables of a specified type. The `type` input argument is a character vector that specifies any type that is accepted by the `isa` function, such as `'numeric'`, `'float'`, `'integer'`, or `'string'`.

For example, `S = vartype('numeric'); T2 = T1(:,S)` returns `T2` as a table that contains only the numeric variables from the table `T1`.

Examples

Select Variables in Table

Create a table that contains numeric and string variables. Then subscript into the table to get only its numeric variables.

```
LastName = string({'Smith';'Johnson';'Williams';'Jones';'Brown'});
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];
T = table(LastName,Age,Height,Weight,BloodPressure)
```

```
T = 5×5 table
     LastName      Age    Height    Weight    BloodPressure
    __________     ___    ______    ______    _____________

    "Smith"        38     71        176       124      93
    "Johnson"      43     69        163       109      77
    "Williams"     38     64        131       125      83
```

```
    "Jones"        40      67         133        117      75
    "Brown"        49      64         119        122      80
```

Create a subscript with the `vartype` function. Subscript into the second dimension of `T` to return a table that contains only the numeric variables.

```
S = vartype('numeric');
T2 = T(:,S)
```

```
T2 = 5×4 table
    Age    Height    Weight    BloodPressure
    ___    ______    ______    _____________

    38     71        176       124      93
    43     69        163       109      77
    38     64        131       125      83
    40     67        133       117      75
    49     64        119       122      80
```

You can create a subscript for any type that the `isa` function accepts. Select the string variable from `T`.

```
S = vartype('string');
T3 = T(:,S)
```

```
T3 = 5×1 table
     LastName
    __________

    "Smith"
    "Johnson"
    "Williams"
    "Jones"
    "Brown"
```

Select Variables in Timetable

Create a timetable that contains numeric, string, and categorical variables. Then subscript into the table to get only its numeric variables.

```
Date = datetime({'12/18/2015';'12/19/2015';'12/20/2015'});
```

```
Temp = [45;33;36];
Pressure = [30.1;29.3;29.7];
Location = string({'Boston';'Boston';'Worcester'});
SensorType = categorical({'S1';'X7';'S1'});
TT = timetable(Date,Temp,Pressure,Location,SensorType)
```

```
TT = 3×4 timetable
        Date        Temp    Pressure     Location      SensorType
    ___________     ____    ________    ___________    __________

    18-Dec-2015     45      30.1        "Boston"       S1
    19-Dec-2015     33      29.3        "Boston"       X7
    20-Dec-2015     36      29.7        "Worcester"    S1
```

Create a subscript with the `vartype` function. Subscript into the second dimension of `TT` to return a timetable that contains only the numeric variables. `TT2` also has the row times from `TT` because the times identify the rows. The vector of row times is a property of the timetable, and not one of its variables.

```
S = vartype('numeric');
TT2 = TT(:,S)
```

```
TT2 = 3×2 timetable
        Date        Temp    Pressure
    ___________     ____    ________

    18-Dec-2015     45      30.1
    19-Dec-2015     33      29.3
    20-Dec-2015     36      29.7
```

- "Select Timetable Data by Row Time and Variable Type"

Input Arguments

`type` — Type of variables to select from a table or a timetable

character vector

Type of variables to select from a table or a timetable, specified as a character vector. `type` can be any type that is accepted by the `isa` function, and also can be `'cellstr'` to select variables that contain cell arrays of character vectors.

See Also

See Also

`table` | `timerange` | `timetable` | `withtol`

Topics

"Select Timetable Data by Row Time and Variable Type"
"Tables"
"Represent Dates and Times in MATLAB"

Introduced in R2016b

CategoricalVariableImportOptions

Import options for categorical variables

Description

A `CategoricalVariableImportOptions` object enables detailed customization for importing `categorical` data from spreadsheet files or text files. The object contains properties that control the import process for `categorical` data. Use `CategoricalVariableImportOptions` object to query the current (detected) values of import properties or to assign new values based on your import needs.

Create Object

Create a `VariableImportOptions` object using the `getvaropts` function.

Properties

`Name` — Variable name

character vector

Variable name, specified as a character vector. The `Name` property contains the name to use when importing this variable.

Use `Name` to:

- Query the current (or detected) variable name.
- Assign new names to the variable.

Example: `varOpts.Name` returns the current (detected) variable name.

Example: `varOpts.Name = 'Height'` changes the name of the variable to `Height`.

`Type` — Variable data type

`'categorical'`

Variable data type, specified as a character vector. The `Type` property designates the data types to use when importing the variable. Once a `CategoricalVariableImportOptions` object is created, the `Type` property is automatically set to, the only permitted value, `categorical`.

Use the `Type` property to query the current value.

Example: `varOpts.Type` returns the current (detected) variable data type.

`FillValue` — Replacement value for missing `categorical` data

character vector

Replacement value for missing `categorical` data, specified as character vector containing the name to use for the replacement category. The importing function replaces any missing instances with the value specified in the `FillValue` property.

To direct the import of data that is missing, unconvertible, or that causes errors, use these four properties together: `FillValue`, `TreatAsMissing`, `MissingRule`, and `ErrorRule`. The importing function uses the value specified in the `FillValue` property when:

- Data is unconvertible or matches a value in `TreatAsMissing`.
- `MissingRule` or the `ErrorRule` is set to `fill`.

When converting to the `categorical` data type, if the `Categories` property of the `CategoricalVariableImportOptions` is empty, then the importing function will not error.

Example: `varOpts.FillValue = 'Miscellaneous'` assigns the category `Miscellaneous` to missing instances in categorical data.

`TreatAsMissing` — Text to interpret as missing data

character vector | cell array of character vectors

Text to interpret as missing data, specified as a character vector or a cell array of character vectors.

When the importing function finds missing instances, it uses the specification in the `MissingRule` property to determine the appropriate action.

Example: `'TreatAsMissing',{'NA','TBD'}` instructs the importing function to treat any occurrence of `NA` or `TBD` as a missing fields.

Data Types: `char` | `cell`

`QuoteRule` — Procedure to manage double quotation marks

`'remove'` | `'keep'` | `'error'`

Procedure to manage double quotation marks in the data, specified as one of the values in this table.

Quote Rule	Process
`'remove'`	If double quotes (`"`) surround characters, then the importing function removes both the opening double quote and the next occurring double quote, which would be interpreted as the closing double quote. **Example:** `"500"` is imported as `500`. If two sets of double quotes (`""`) surround characters, then the importing function removes the first two occurrences. **Example:** `""abc""` is imported as `abc""`. If a pair of opening and closing quotes surrounding characters is followed by a single lone unpaired double quotes, then the importing function ignores the lone unpaired double quote. **Example:** `"abc""` is imported as `abc"`.
`'keep'`	Retain all quotation marks.
`'error'`	Report an error when converting data which begins with a double quotation mark (`"`). Use this setting if the field should never be quoted.

Example: If the `'QuoteRule'` is set to `'remove'`, then the importing function imports `"abc"def"` as `abcdef"`.

`Categories` — Expected categories

cell array of character vectors

Expected categories, specified as a cell array of character vectors, containing a list of category names.

Names in the input fields must match one of the names specified in the `Categories` property to avoid a conversion error.

Example: `varOpts.Categories = {'BareLand','Forest','Water','Roads','Buildings'};`

`Ordinal` — Mathematical ordering indicator

`false` (default) | `true` | `0` | `1`

Mathematical ordering indicator, specified as either `false`, `true`, `0`, or `1`. For more information on categorical arrays, see the `categorical` function reference page.

`Protected` — Category protection indicator

`false` | `true` | `0` | `1`

Category protection indicator, specified as either `false`, `true`, `0`, or `1`. The categories of ordinal categorical arrays are always protected. If the `Ordinal` property is set to `true`, then the default value for `Protected` is `true`. Otherwise, the value for `Protected` is `false`. For more information on categorical arrays, see the `categorical` function reference page.

Object Functions

getvaropts	Get variable import options
setvaropts	Set variable import options
setvartype	Set variable data types

Examples

Set Options When Importing Categorical Data

Use the `setvaropts` function to update properties that control the import of `categorical` data. First, get the import options object for the file. Next, examine and update the options for the categorical variables. Finally, import the variables using the `readtable` function.

Preview the data in `outages.csv`. Notice the categorical data in the columns `Region` and `Cause`. This table shows only the first 10 rows.

	A	B	C	D	E	F
1	Region	OutageTime	Loss	Customers	RestorationTime	Cause
2	SouthWest	2/1/2002 12:18	458.977222	1820159.482	2/7/2002 16:50	winter storm
3	SouthEast	1/23/2003 0:49	530.13995	212035.3001		winter storm
4	SouthEast	2/7/2003 21:15	289.403549	142938.6282	2/17/2003 8:14	winter storm
5	West	4/6/2004 5:44	434.805352	340371.0338	4/6/2004 6:10	equipment fault
6	MidWest	3/16/2002 6:18	186.436779	212754.055	3/18/2002 23:23	severe storm
7	West	6/18/2003 2:49	0	0	6/18/2003 10:54	attack
8	West	6/20/2004 14:39	231.294723		6/20/2004 19:16	equipment fault
9	West	6/6/2002 19:28	311.860732		6/7/2002 0:51	equipment fault
10	NorthEast	7/16/2003 16:23	239.932847	49434.48932	7/17/2003 1:12	fire

Get the import options object.

```
opts = detectImportOptions('outages.csv');
```

Get and examine the options for variables `Region` and `Cause`.

```
getvaropts(opts,{'Region','Cause'})
```

```
ans = 
  1×2 TextVariableImportOptions array with properties:

    WhitespaceRule
    Type
    FillValue
    Name
    QuoteRule
    TreatAsMissing
```

Set the data type of the variables to `categorical`.

```
opts = setvartype(opts,{'Region','Cause'},'categorical');
```

Set the `FillValue` property of the variables to replace missing values with category name `'Miscellaneous'`. Set `TreatAsMissing` property to `'unknown'`.

```
opts = setvaropts(opts,{'Region','Cause'},...
                                    'FillValue','Miscellaneous',...
                                    'TreatAsMissing','unknown');
```

Select, read, and display a summary of the two variables.

```
opts.SelectedVariableNames = {'Region','Cause'};
T = readtable('outages.csv',opts);
summary(T)
```

```
Variables:

    Region: 1468×1 categorical

        Values:

            MidWest      142
            NorthEast    557
            SouthEast    389
            SouthWest     26
            West         354

    Cause: 1468×1 categorical

        Values:

            Miscellaneous        24
            attack              294
            earthquake            2
            energy emergency    188
            equipment fault     156
            fire                 25
            severe storm        338
            thunder storm       201
            wind                 95
            winter storm        145
```

See Also

See Also

`DatetimeVariableImportOptions` | `detectImportOptions` | `LogicalVariableImportOptions` | `NumericVariableImportOptions` | `TextVariableImportOptions`

Introduced in R2016b

DatetimeVariableImportOptions

Import options for datetime variables

Description

A `DatetimeVariableImportOptions` object enables detailed customization for importing `datetime` data from spreadsheet files or text files. The object contains properties that control the importing of `datetime` data. Use `DatetimeVariableImportOptions` object to query the current (detected) values of import properties or to assign new values based on your import needs.

Create Object

Create a `VariableImportOptions` object using the `getvaropts` function.

Properties

`Name` — Variable name

character vector

Variable name, specified as a character vector. The `Name` property contains the name to use when importing this variable.

Use `Name` to:

- Query the current (or detected) variable name.
- Assign new names to the variable.

Example: `varOpts.Name` returns the current (detected) variable name.

Example: `varOpts.Name = 'Height'` changes the name of the variable to `Height`.

`Type` — Variable data type

`'datetime'`

Variable data type, specified as a character vector. The `Type` property designates the data types to use when importing the variable. Once a

`DatetimeVariableImportOptions` object is created, the `Type` property is automatically set to, the only permitted value, `datetime`.

Use the `Type` property to query the current value.

Example: `varOpts.Type` returns the current (detected) variable data type.

`FillValue` — Replacement value for missing `datetime` data
scalar value

Replacement value for missing `datetime` data, specified as scalar value that represents dates and times. The For more information on valid `datetime` inputs, see the `datetime` function page.

To direct the import of data that is missing, unconvertible, or that causes errors, use these four properties together: `FillValue`, `TreatAsMissing`, `MissingRule`, and `ErrorRule`. The importing function uses the value specified in the `FillValue` property when:

- Data is unconvertible or matches a value in `TreatAsMissing`.
- `MissingRule` or the `ErrorRule` is set to `fill`.

Example: `varOpts.FillValue = 'now'` sets the missing `datetime` instances to the current date and time.

Example: `varOpts.FillValue = [1998 12 1]` sets the missing `datetime` instances to the date `December 1st, 1998`.

`TreatAsMissing` — Text to interpret as missing data
character vector | cell array of character vectors

Text to interpret as missing data, specified as a character vector or a cell array of character vectors.

When the importing function finds missing instances, it uses the specification in the `MissingRule` property to determine the appropriate action.

Example: `'TreatAsMissing',{'NA','TBD'}` instructs the importing function to treat any occurrence of `NA` or `TBD` as a missing fields.

Data Types: `char` | `cell`

`QuoteRule` — Procedure to manage double quotation marks
`'remove'` | `'keep'` | `'error'`

Procedure to manage double quotation marks in the data, specified as one of the values in this table.

Quote Rule	Process
`'remove'`	If double quotes (") surround characters, then the importing function removes both the opening double quote and the next occurring double quote, which would be interpreted as the closing double quote. **Example:** `"500"` is imported as `500`. If two sets of double quotes (`""`) surround characters, then the importing function removes the first two occurrences. **Example:** `""abc""` is imported as `abc""`. If a pair of opening and closing quotes surrounding characters is followed by a single lone unpaired double quotes, then the importing function ignores the lone unpaired double quote. **Example:** `"abc""` is imported as `abc"`.
`'keep'`	Retain all quotation marks.
`'error'`	Report an error when converting data which begins with a double quotation mark ("). Use this setting if the field should never be quoted.

Example: If the `'QuoteRule'` is set to `'remove'`, then the importing function imports `"abc"def"` as `abcdef"`.

`DatetimeFormat` — Display format

`'default'` | `'defaultdate'` | `'preserveinput'` | custom format | character vector

Display format, specified as a character vector. The `DatetimeFormat` property controls the display format of dates and times in the output. Specify `DatetimeFormat` as one of these values.

Value of `DatetimeFormat`	Description
`'default'`	Use the default display format.

Value of `DatetimeFormat`	Description
`'defaultdate'`	Use the default display format for datetime values created without time components.
`'preserveinput'`	Use the format specified by the input format, `InputFormat`.
Custom formats	Use the letters `A-Z` and `a-z` to construct a custom value for `DatetimeFormat`. These letters correspond to the Unicode Locale Data Markup Language (LDML) standard for dates. You can include non-ASCII or nonletter characters such as a hyphen, space, or colon to separate the fields. To include the letters `A-Z` and `a-z` as literal characters in the format, enclose them with single quotes.

The factory default format depends on your system locale. To change the default display format, see "Default datetime Format".

`InputFormat` — Format of input text representing dates and times

character vector

Format of the input text representing dates and times, specified as a character vector that contains letter identifiers.

This table shows several common input formats and examples of the formatted input for the date, Saturday, April 19, 2014 at 9:41:06 PM in New York City.

Value of `InputFormat`	Example
`'yyyy-MM-dd'`	`2014-04-19`
`'dd/MM/yyyy'`	`19/04/2014`
`'dd.MM.yyyy'`	`19.04.2014`
`'yyyy# MM# dd#'`	`2014# 04# 19#`
`'MMMM d, yyyy'`	`April 19, 2014`
`'eeee, MMMM d, yyyy h:mm a'`	`Saturday, April 19, 2014 9:41 PM`
`'MMMM d, yyyy HH:mm:ss Z'`	`April 19, 2014 21:41:06 -0400`

Value of `InputFormat`	Example
`'yyyy-MM-dd''T''HH:mmXXX'`	`2014-04-19T21:41-04:00`

For a complete list of valid letter identifiers, see the Format property for datetime arrays.

Example: `'InputFormat','eeee, MMMM d, yyyy HH:mm:ss'`

`DatetimeLocale` — Locale to use for interpreting dates

character vector

Locale to use for interpreting dates, specified as a character vector. The `DatetimeLocale` value determines how the importing function interprets text that represents dates and times.

Set the `DatetimeLocale` value to:

- `'system'`, to specify your system locale.
- or a character vector in the form *`xx_YY`*, where *`xx`* is a lowercase ISO 639-1 two-letter code that specifies a language, and *`YY`* is an uppercase ISO 3166-1 alpha-2 code that specifies a country.

This table lists some common values for the locale.

Locale	Language	Country
`'de_DE'`	German	Germany
`'en_GB'`	English	United Kingdom
`'en_US'`	English	United States
`'es_ES'`	Spanish	Spain
`'fr_FR'`	French	France
`'it_IT'`	Italian	Italy
`'ja_JP'`	Japanese	Japan
`'ko_KR'`	Korean	Korea
`'nl_NL'`	Dutch	Netherlands
`'zh_CN'`	Chinese (simplified)	China

Example: `varOpts.DatetimeLocale = 'de_DE'` sets the date time locale to German.

Note: The `Locale` value determines how input values are interpreted. The display format and language is specified by the **Locale** option in the **Datetime format** section of the Preferences panel. To change the default datetime locale, see "Set Command Window Preferences".

Object Functions

getvaropts	Get variable import options
setvaropts	Set variable import options
setvartype	Set variable data types

Examples

Importing Date and Time Data

Use `DatetimeVariableImportOptions` properties to control the import of `datetime` data. First, get the `ImportOptions` object for the file. Next, examine and update the `VariableImportOptions` for the datetime variables. Finally, import the variables using `readtable`.

Preview of data in `outages.csv`. Notice the date and time data in the columns `OutageTime` and `RestorationTime`. Only the first 10 rows are shown here.

	A	B	C	D	E	F
1	Region	OutageTime	Loss	Customers	RestorationTime	Cause
2	SouthWest	2/1/2002 12:18	458.977222	1820159.482	2/7/2002 16:50	winter storm
3	SouthEast	1/23/2003 0:49	530.13995	212035.3001		winter storm
4	SouthEast	2/7/2003 21:15	289.403549	142938.6282	2/17/2003 8:14	winter storm
5	West	4/6/2004 5:44	434.805352	340371.0338	4/6/2004 6:10	equipment fault
6	MidWest	3/16/2002 6:18	186.436779	212754.055	3/18/2002 23:23	severe storm
7	West	6/18/2003 2:49	0	0	6/18/2003 10:54	attack
8	West	6/20/2004 14:39	231.294723		6/20/2004 19:16	equipment fault
9	West	6/6/2002 19:28	311.860732		6/7/2002 0:51	equipment fault
10	NorthEast	7/16/2003 16:23	239.932847	49434.48932	7/17/2003 1:12	fire

Get the import options object.

```
opts = detectImportOptions('outages.csv');
```

Get and examine the `VariableImportOptions` for datetime variables `OutageTime` and `RestorationTime`.

```
varOpts = getvaropts(opts,{'OutageTime','RestorationTime'})
```

```
varOpts 
  1×2 DatetimeVariableImportOptions array with properties:

    DatetimeFormat
    DatetimeLocale
    InputFormat
    Type
    FillValue
    Name
    QuoteRule
    TreatAsMissing
```

Set the `FillValue` property of the variables to replace missing values with current date and time.

```
opts = setvaropts(opts,{'OutageTime','RestorationTime'},...
                                                 'FillValue','now');
```

Select, read, and preview the two variables. Notice the missing value in the second row of `RestorationTime` has been filled with current date and time.

```
opts.SelectedVariableNames = {'OutageTime','RestorationTime'};
T = readtable('outages.csv',opts);
T(1:10,:)
```

```
ans = 10×2 table
         OutageTime           RestorationTime
    ____________________    ____________________

    01-Feb-2002 12:18:00    07-Feb-2002 16:50:00
    23-Jan-2003 00:49:00    24-Feb-2017 12:47:28
    07-Feb-2003 21:15:00    17-Feb-2003 08:14:00
    06-Apr-2004 05:44:00    06-Apr-2004 06:10:00
    16-Mar-2002 06:18:00    18-Mar-2002 23:23:00
    18-Jun-2003 02:49:00    18-Jun-2003 10:54:00
    20-Jun-2004 14:39:00    20-Jun-2004 19:16:00
    06-Jun-2002 19:28:00    07-Jun-2002 00:51:00
    16-Jul-2003 16:23:00    17-Jul-2003 01:12:00
    27-Sep-2004 11:09:00    27-Sep-2004 16:37:00
```

See Also

See Also

`CategoricalVariableImportOptions` | `detectImportOptions` | `LogicalVariableImportOptions` | `NumericVariableImportOptions` | `TextVariableImportOptions`

Introduced in R2016b

LogicalVariableImportOptions

Import options for logical variables

Description

A `LogicalVariableImportOptions` object enables detailed customization for importing `logical` data from spreadsheet files or text files. The object contains properties that control the import process for `logical` data. Use `LogicalVariableImportOptions` object to query the current (detected) values of import properties or to assign new values based on your import needs.

Create Object

Create a `VariableImportOptions` object using the `getvaropts` function.

Properties

`Name` — Variable name

character vector

Variable name, specified as a character vector. The `Name` property contains the name to use when importing this variable.

Use `Name` to:

- Query the current (or detected) variable name.
- Assign new names to the variable.

Example: `varOpts.Name` returns the current (detected) variable name.

Example: `varOpts.Name = 'Height'` changes the name of the variable to `Height`.

`Type` — Variable data type

`'logical'`

Variable data type, specified as a character vector. The `Type` property designates the data types to use when importing the variable. Once a

`LogicalVariableImportOptions` object is created, the `Type` property is automatically set to, the only permitted value, `logical`.

Use the `Type` property to query the current value.

Example: `varOpts.Type` returns the current (detected) variable data type.

`FillValue` — Replacement value for missing `logical` data

`true` | `false`

Replacement value for missing `logical` data, specified as `true` or `false`. The importing function replaces any missing instances with the value specified in the `FillValue` property.

To direct the import of data that is missing, unconvertible, or that causes errors, use these four properties together: `FillValue`, `TreatAsMissing`, `MissingRule`, and `ErrorRule`. The importing function uses the value specified in the `FillValue` property when:

- Data is unconvertible or matches a value in `TreatAsMissing`.
- `MissingRule` or the `ErrorRule` is set to `fill`.

Example: `varOpts.FillValue = false;`

`TreatAsMissing` — Text to interpret as missing data

character vector | cell array of character vectors

Text to interpret as missing data, specified as a character vector or a cell array of character vectors.

When the importing function finds missing instances, it uses the specification in the `MissingRule` property to determine the appropriate action.

Example: `'TreatAsMissing',{'NA','TBD'}` instructs the importing function to treat any occurrence of `NA` or `TBD` as a missing fields.

Data Types: `char` | `cell`

`QuoteRule` — Procedure to manage double quotation marks

`'remove'` | `'keep'` | `'error'`

Procedure to manage double quotation marks in the data, specified as one of the values in this table.

Quote Rule	Process
`'remove'`	If double quotes (") surround characters, then the importing function removes both the opening double quote and the next occurring double quote, which would be interpreted as the closing double quote. **Example:** `"500"` is imported as `500`. If two sets of double quotes (`""`) surround characters, then the importing function removes the first two occurrences. **Example:** `""abc""` is imported as `abc""`. If a pair of opening and closing quotes surrounding characters is followed by a single lone unpaired double quotes, then the importing function ignores the lone unpaired double quote. **Example:** `"abc""` is imported as `abc"`.
`'keep'`	Retain all quotation marks.
`'error'`	Report an error when converting data which begins with a double quotation mark ("). Use this setting if the field should never be quoted.

Example: If the `'QuoteRule'` is set to `'remove'`, then the importing function imports `"abc"def"` as `abcdef"`.

`TrueSymbols` — Text to treat as logical value `true`

character vector | cell array of character vectors

Text to treat as the logical value `true`, specified as a character vector or a cell array of character vectors.

Example: If `varOpts.TrueSymbols = {'t','TRUE'}`, then the importing function imports any fields containing `t` or `TRUE` as the logical value `true`.

Data Types: `char` | `cell`

`FalseSymbols` — Text to treat as logical value `false`

character vector | cell array of character vectors

Text to treat as the logical value `false`, specified as a character vector or a cell array of character vectors.

Example: If `varOpts.FalseSymbols = {'f','FALSE'}`, then the importing function imports any fields containing `f` or `FALSE` as the logical value `false`.

Data Types: `char` | `cell`

`CaseSensitive` — Indicator to match case
`true` | `false`

Indicator to match case, specified as a logical value `true` or `false`.

To interpret the input data as missing, `true`, or `false`, the importing function matches the data to values specified in `TreatAsMissing`, `TrueSymbols`, and `FalseSymbols`.

Object Functions

getvaropts	Get variable import options
setvaropts	Set variable import options
setvartype	Set variable data types

Examples

Set Options When Importing Logical Data

Use the `setvaropts` function to update properties that control the import of `logical` data. First, get the import options object for the file. Next, examine and update the options for the logical variables. Finally, import the variables using the `readtable` function.

Preview the data in `airlinesmall_subset.xlsx`. Notice the logical data in the column `Cancelled`. Only a preview of rows 30 to 40 is shown here.

	R	S	T	U	V
1	Dest	Distance	TaxiIn	TaxiOut	Cancelled
30	LAX	373	7	11	0
31	LGA	214	4	11	0
32	LGA	733	5	10	0
33	MAF	429	0	0	1
34	MCI	1499	6	13	0
35	MCO	758	9	9	0
36	MDW	307	8	15	0
37	MEM	200	3	9	0
38	MFE	316	3	10	0
39	MIA	1090	7	85	0
40	MLB	443	5	14	0
41	MSP	680	3	10	0

Get the import options object.

```
opts = detectImportOptions('airlinesmall_subset.xlsx');
```

Get and examine the `VariableImportOptions` for variable `Cancelled`.

```
getvaropts(opts,'Cancelled')
```

```
ans = 
  NumericVariableImportOptions with properties:

   Variable Properties:
                   Name: 'Cancelled'
                   Type: 'double'
              FillValue: NaN
          TreatAsMissing: {}
              QuoteRule: 'remove'

   Numeric Options:
     ExponentCharacter: 'eEdD'
      DecimalSeparator: '.'
    ThousandsSeparator: ''
```

Set the data type of the variable to `logical`.

```
opts = setvartype(opts,'Cancelled','logical');
```

Set the `FillValue` property of the variable to replace missing values with `true`.

```
opts = setvaropts(opts,'Cancelled','FillValue',true);
```

Select, read, and display a summary of the variable.

```
opts.SelectedVariableNames = 'Cancelled';
T = readtable('airlinesmall_subset.xlsx',opts);
summary(T)
```

```
Variables:

    Cancelled: 1338×1 logical

        Values:

            True       29
            False    1309
```

See Also

See Also

`CategoricalVariableImportOptions` | `DatetimeVariableImportOptions` | `detectImportOptions` | `NumericVariableImportOptions` | `TextVariableImportOptions`

Introduced in R2016b

NumericVariableImportOptions

Import options for numeric variables

Description

A `NumericVariableImportOptions` object enables detailed customization for importing numeric data from spreadsheet files or text files. The object contains properties that control the import process for numeric data. Use `NumericVariableImportOptions` object to query the current (detected) values of import properties or to assign new values based on your import needs.

Create Object

Create a `VariableImportOptions` object using the `getvaropts` function.

Properties

`Name` — Variable name

character vector

Variable name, specified as a character vector. The `Name` property contains the name to use when importing this variable.

Use `Name` to:

- Query the current (or detected) variable name.
- Assign new names to the variable.

Example: `varOpts.Name` returns the current (detected) variable name.

Example: `varOpts.Name = 'Height'` changes the name of the variable to `Height`.

`Type` — Variable data type

`'double'` (default) | `'single'` | `'int8'` | `'int16'` | `'int32'` | `'int64'` | `'uint8'` | `'uint16'` | `'uint32'` | `'uint64'`

Variable data type, specified as a character vector. The `Type` property designates the data types to use when importing the variable. When assigning a new value, specify `Type` as a valid data type name.

Use `Type` to:

- Query the current (or detected) variable data type.
- Assign new data types to the variable.

Undefined floating-point numbers `NaN`, `-Inf`, `+Inf` are only valid for `single` and `double` data types. Therefore, the importing function converts the floating-point data to an integer data type. For example, when converting to the `'uint8'` data type:

- `NaN` is converted to `0`.
- `-Inf` is converted to `intmin('int8')`.
- `+Inf` is converted to `intmax('int8')`.

The same conversion process applies to all the integer data types: `int8`, `int16`, `int16`, `int32`, `int64`, `uint8`, `uint16`, `uint32`, or `uint64`.

Update the `'Type'` property through direct assignment or by using the `setvartype` function.

Example: `varOpts.Type` returns the current (detected) variable data type.

Example: `varOpts.Type = 'double'` changes the data type of the variable to `double`.

Example: `opts = setvartype(opts,'Height','uint8')` changes the data type of the variable `Height` to `uint8`.

`FillValue` — Replacement value for missing numeric data
scalar numeric value

Replacement value for missing numeric data is specified, specified as a scalar numeric. The importing function replaces any missing instances with the value specified in the `FillValue` property.

To direct the import of data that is missing, unconvertible, or that causes errors, use these four properties together: `FillValue`, `TreatAsMissing`, `MissingRule`, and `ErrorRule`. The importing function uses the value specified in the `FillValue` property when:

- Data is unconvertible or matches a value in `TreatAsMissing`.

- `MissingRule` or the `ErrorRule` is set to `fill`.

The input for `FillValue` is converted to data type specified in the `Type` property of the variable. For example, if the `Type` property is specified as `'uint8'`, then the value specified for `FillValue` is also converted to `'uint8'`.

Example: `varOpts.FillValue = 0`

`TreatAsMissing` — Text to interpret as missing data
character vector | cell array of character vectors

Text to interpret as missing data, specified as a character vector or a cell array of character vectors.

When the importing function finds missing instances, it uses the specification in the `MissingRule` property to determine the appropriate action.

Example: `'TreatAsMissing',{'NA','TBD'}` instructs the importing function to treat any occurrence of `NA` or `TBD` as a missing fields.

Data Types: `char` | `cell`

`QuoteRule` — Procedure to manage double quotation marks
`'remove'` | `'keep'` | `'error'`

Procedure to manage double quotation marks in the data, specified as one of the values in this table.

Quote Rule	Process
`'remove'`	If double quotes (") surround characters, then the importing function removes both the opening double quote and the next occurring double quote, which would be interpreted as the closing double quote. **Example:** `"500"` is imported as `500`. If two sets of double quotes (`""`) surround characters, then the importing function removes the first two occurrences. **Example:** `""abc""` is imported as `abc""`. If a pair of opening and closing quotes surrounding characters is followed by a single lone unpaired double

Quote Rule	Process
	quotes, then the importing function ignores the lone unpaired double quote. **Example:** `"abc""` is imported as `abc"`.
`'keep'`	Retain all quotation marks.
`'error'`	Report an error when converting data which begins with a double quotation mark (`"`). Use this setting if the field should never be quoted.

Example: If the `'QuoteRule'` is set to `'remove'`, then the importing function imports `"abc"def"` as `abcdef"`.

`ExponentCharacter` — Characters indicating exponent

character vector

Characters indicating the exponent, specified as a character vector. The importing function uses the `ExponentCharacter` property to recognize the characters indicating the exponent for a number expressed in the scientific notation.

Example: If `varOpts.ExponentCharacter = 'a'`, then the importing function imports the text `"1.2a3"` as the number `1200`.

`DecimalSeparator` — Characters indicating decimal separator

character vector

Characters indicating the decimal separator, specified as a character vector. The importing function uses the `DecimalSeparator` property to distinguish the integer part of a number from the decimal part.

When converting to integer data types, numbers with a decimal part are rounded to the nearest integer.

Example: If `varOpts.DecimalSeparator = ','`, then the importing function imports the text `"3,14159"` as the number `3.14159`.

`ThousandsSeparator` — Characters that indicate the thousands grouping

character vector

Characters that indicate the thousands grouping, specified as a character vector. The thousands grouping characters act as visual separators, grouping the number

at every three place values. The importing function uses the characters in the `ThousandsSeparator` property to interpret the numbers being imported.

Example: If `varOpts.ThousandsSeparator = ','`, then the importing function imports the text `"1,234,000"` as `1234000`.

Object Functions

getvaropts	Get variable import options
setvaropts	Set variable import options
setvartype	Set variable data types

Examples

Set Options for Numeric Data Containing Missing or Incomplete Records

Importing data that has missing or incomplete fields requires recognizing the missing instances and deciding how the missing instances will be imported. Use `importOptions` to capture both these decisions and fetch the data using `readtable`.

Create an import options object for the file, update properties that control the import of missing data, use `readtable` to import the data. Note that the dataset `airlinesmall.csv` has two numeric variables `ArrDelay` and `DepDelay`, that contain missing data indicated by `NA`.

	O	P	Q	R	S
1	ArrDelay	DepDelay	Origin	Dest	Distance
167	-1	0	MEM	JAN	189
168	102	105	MEM	CVG	403
169	-11	0	ABE	DTW	424
170	NA	NA	MSP	BUF	734
171	-1	0	MEM	BNA	200
172	0	0	STL	DTW	440
173	1	0	VPS	MEM	369
174	1	0	MSP	IAD	908
175	14	0	CLE	DTW	95
176	-14	0	JAN	MEM	189
177	5	0	SEA	PDX	129
178	25	38	MSP	ATW	236
179	0	-5	DTW	CAK	133
180	NA	NA	MIA	MCO	193
181	6	0	DCA	LGA	214

Create an import options object from the file.

```
opts = detectImportOptions('airlinesmall.csv');
```

Use the `TreatAsMissing` property to specify the characters in the data that are place holders for missing instances. In this example, the two numeric variables `ArrDelay` and `DepDelay` contain missing fields that contain the text `NA`.

```
opts = setvaropts(opts,{'ArrDelay','DepDelay'},'TreatAsMissing','NA');
```

Specify the action for the importing function to take when importing missing instances. See `ImportOptions` properties page for more options.

```
opts.MissingRule = 'fill';
```

Specify the value to use when the importing function finds a missing instance. Here the missing instances in variables `ArrDelay` and `DepDelay` are replaced by `0`.

```
opts = setvaropts(opts,{'ArrDelay','DepDelay'},'FillValue',0);
```

Select the variables you want to work with and import them using `readtable`.

```
opts.SelectedVariableNames = {'ArrDelay','DepDelay'};
T = readtable('airlinesmall.csv',opts);
```

Examine the values in `ArrDelay` and `DepDelay`. Verify that the importing function replaced the missing values denoted by `NA`.

```
T(166:180,:)
```

```
ans = 15×2 table
    ArrDelay    DepDelay
    ________    ________

     -1            0
    102          105
    -11            0
      0            0
     -1            0
      0            0
      1            0
      1            0
     14            0
    -14            0
      5            0
     25           38
      0           -5
      0            0
      6            0
```

See Also

See Also

`CategoricalVariableImportOptions` | `DatetimeVariableImportOptions` | `detectImportOptions` | `LogicalVariableImportOptions` | `TextVariableImportOptions`

Introduced in R2016b

TextVariableImportOptions

Import options for text variables

Description

A `TextVariableImportOptions` object enables detailed customization for importing text data from spreadsheet files or text files. The object contains properties that control the import process for text data. Use `TextVariableImportOptions` object to query the current (detected) values of import properties or to assign new values based on your import needs.

Create Object

A `TextVariableImportsOptions` object represents the properties of a column of text data (from a table). When the `detectImportOptions` function creates import options for a file, it creates a `TextVariableImportOptions` object for a column of text data. Use `getvaropts` to examine the `TextVariableImportOptions` object for a selected text variable.

```
opts = detectImportOptions(filename);
varOpts = getvaropts(opts,VariableName)
```

Properties

`Name` — Variable name

character vector

Variable name, specified as a character vector. The `Name` property contains the name to use when importing this variable.

Use `Name` to:

- Query the current (or detected) variable name.
- Assign new names to the variable.

Example: `varOpts.Name` returns the current (detected) variable name.

Example: `varOpts.Name = 'Height'` changes the name of the variable to `Height`.

`Type` — Variable data type

`'char'` (default) | `'string'`

Variable data type, specified as a character vector. The `Type` property designates the data types to use when importing the variable. When assigning a new value, specify `Type` as a valid data type name.

Use `Type` to:

- Query the current (or detected) variable data type.
- Assign new data types to the variable.

Update the `Type` property through direct assignment or by using the `setvartype` function.

Example: `varOpts.Type` returns the current (detected) variable data type.

Example: `varOpts.Type = 'string'` changes the data type of the variable to `string`.

Example: `opts = setvartype(opts,'StateName','char')` changes the data type of the variable `StateName` to `char`.

`FillValue` — Replacement text for missing data

character vector

Replacement text for missing data is specified as character vector containing the replacement text.

To direct the import of data that is missing, unconvertible, or that causes errors, use these four properties together: `FillValue`, `TreatAsMissing`, `MissingRule`, and `ErrorRule`. The importing function uses the value specified in the `FillValue` property when:

- Data is unconvertible or matches a value in `TreatAsMissing`.
- `MissingRule` or the `ErrorRule` is set to `fill`.

Example: `varOpts.FillValue = 'not applicable';`

`TreatAsMissing` — Text to interpret as missing data

character vector | cell array of character vectors

Text to interpret as missing data, specified as a character vector or a cell array of character vectors.

When the importing function finds missing instances, it uses the specification in the `MissingRule` property to determine the appropriate action.

Example: `'TreatAsMissing',{'NA','TBD'}` instructs the importing function to treat any occurrence of `NA` or `TBD` as a missing fields.

Data Types: `char | cell`

`QuoteRule` — Procedure to manage double quotation marks
`'remove' | 'keep' | 'error'`

Procedure to manage double quotation marks in the data, specified as one of the values in this table.

Quote Rule	Process
`'remove'`	If double quotes (") surround characters, then the importing function removes both the opening double quote and the next occurring double quote, which would be interpreted as the closing double quote. **Example:** `"500"` is imported as `500`. If two sets of double quotes (`""`) surround characters, then the importing function removes the first two occurrences. **Example:** `""abc""` is imported as `abc""`. If a pair of opening and closing quotes surrounding characters is followed by a single lone unpaired double quotes, then the importing function ignores the lone unpaired double quote. **Example:** `"abc""` is imported as `abc"`.
`'keep'`	Retain all quotation marks.
`'error'`	Report an error when converting data which begins with a double quotation mark ("). Use this setting if the field should never be quoted.

Example: If the `'QuoteRule'` is set to `'remove'`, then the importing function imports `"abc"def"` as `abcdef"`.

`WhiteSpaceRule` — Procedure to manage leading and trailing white spaces
`'trim'` (default) | `'trimleading'` | `'trimtrailing'` | `'preserve'`

Procedure to manage leading and trailing white spaces when importing text data, specified as one of the values in the table.

White Space Rule	Process
`'trim'`	Remove any leading or trailing white spaces from the text. Interior white space is unaffected. **Example:** `' World Time '` is imported as `'World Time'`
`'trimleading'`	Remove only the leading white spaces. **Example:** `' World Time '` is imported as `'World Time '`
`'trimtrailing'`	Remove only the trailing white spaces. **Example:** `' World Time '` is imported as `'World Time'`
`'preserve'`	Preserve white spaces. **Example:** `' World Time '` is imported as `' World Time '`

Object Functions

getvaropts	Get variable import options
setvaropts	Set variable import options
setvartype	Set variable data types

Examples

Set Options When Importing Text Data

Use the `setvaropts` function to update properties that control the import of text data. First, get the import options object for the file. Next, examine and update the options for the text variables. Finally, import the variables using the `readtable` function.

Preview the data in `patients.xls`. Notice the text data in the column `LastName`. Only a preview of the first 10 rows is shown here.

	A	B	C	D
1	LastName	Gender	Age	Location
2	Smith	Male	38	County General Hospital
3	Johnson	Male	43	VA Hospital
4	Williams	Female	38	St. Mary's Medical Center
5	Jones	Female	40	VA Hospital
6	Brown	Female	49	County General Hospital
7	Davis	Female	46	St. Mary's Medical Center
8	Miller	Female	33	VA Hospital
9	Wilson	Male	40	VA Hospital
10	Moore	Male	28	St. Mary's Medical Center

Get the import options object.

```
opts = detectImportOptions('patients.xls');
```

Get and examine the `VariableImportOptions` for variable `LastName`.

```
getvaropts(opts,'LastName')
```

```
ans = 
  TextVariableImportOptions with properties:

   Variable Properties:
              Name: 'LastName'
              Type: 'char'
          FillValue: ''
     TreatAsMissing: {}
          QuoteRule: 'remove'

   String Options:
    WhitespaceRule: 'trim'
```

Set the data type of the variable to `string`.

```
opts = setvartype(opts,'LastName','string');
```

Set the `FillValue` property of the variable to replace missing values with `'NoName'`.

```
opts = setvaropts(opts,'LastName','FillValue','NoName');
```

Select, read, and display a preview of the first 10 rows of the variable.

```
opts.SelectedVariableNames = 'LastName';
T = readtable('patients.xls',opts);
T.LastName(1:10)
```

```
ans = 10×1 string array
    "Smith"
    "Johnson"
    "Williams"
    "Jones"
    "Brown"
    "Davis"
    "Miller"
    "Wilson"
    "Moore"
    "Taylor"
```

See Also

See Also

`CategoricalVariableImportOptions` | `DatetimeVariableImportOptions` | `detectImportOptions` | `LogicalVariableImportOptions` | `NumericVariableImportOptions`

Introduced in R2016b

vectorize

Vectorize expression

Syntax

```
vectorize(c)
vectorize(f)
```

Description

`vectorize(c)`, where `c` is a character row vector, inserts a `.` before any `^`, `*` or `/` in `c`. The result is a character row vector.

Note: `vectorize` will not accept inline function objects (`f`) in a future release.

`vectorize(f)` where `f` is an inline function object, vectorizes the formula for `f`. The result is the vectorized version of the function.

See Also

`inline` | `cd` | `dbtype` | `delete` | `dir` | `path` | `what` | `who`

Introduced before R2006a

ver

Version information for MathWorks products

Syntax

```
ver
ver product
```

```
product_info = ver(product)
```

Description

`ver` displays:

- A header containing the current MATLAB product family version number, license number, operating system, and version of Java software for the MATLAB product.
- The version numbers for MATLAB and all other installed MathWorks products.

`ver product` displays, in addition to the header information:

- The current version number for `product`, where `product` is the name of the folder that contains the `Contents.m` file for the product you are inquiring about.

`product_info = ver(product)` returns product information to the structure array, `product_info`.

Examples

Version for All Installed Products

Display version information for all installed products. The output shown here is representative. Your results might differ.

```
ver
```

```
-----------------------------------------------------------------------------------------------------
MATLAB Version: 8.2.0.29 (R2013b)
MATLAB License Number: 234567
```

```
Operating System: Microsoft Windows 7 Version 6.1 (Build 7601: Service Pack 1)
Java Version: Java 1.7.0_11-b21 with Oracle Corporation Java HotSpot(TM) 64-Bit Server VM mixed mode
-----------------------------------------------------------------------------------------------------
MATLAB                                                Version 8.2       (R2013b)
Simulink                                              Version 8.2       (R2013b)
Control System Toolbox                                Version 9.6       (R2013b)
```

Version for a Particular Product

Display version information for MATLAB and the Control System Toolbox product. The output shown here is representative. Your results might differ.

Determine the product name for Control System Toolbox by setting `n` to the name of a function unique to Control System Toolbox, such as `dss`:

```
n = 'dss';
pat = '(?<=^.+[\\/]toolbox[\\/])[^\\/]+';
regexp(which(n), pat, 'match', 'once')
```

```
ans=
control
```

Specify the value returned in the previous step as an argument to `ver`:

```
ver control
```

```
-----------------------------------------------------------------------------------------------------
MATLAB Version: 8.2.0.29 (R2013b)
MATLAB License Number: 234567
Operating System: Microsoft Windows 7 Version 6.1 (Build 7601: Service Pack 1)
Java Version: Java 1.7.0_11-b21 with Oracle Corporation Java HotSpot(TM) 64-Bit Server VM mixed mode
-----------------------------------------------------------------------------------------------------
Control System Toolbox                                Version 9.6       (R2013b)
```

Structure Containing Version for MATLAB Products

Create a structure containing version information, and then display the structure values. The output shown here is representative. Your results might differ.

```
v = ver;
for k = 1:length(v)
  fprintf('%s\n', v(k).Name)
  fprintf('  Version: %s\n', v(k).Version)
end
```

```
MATLAB
 Version: 8.2

MATLAB Compiler
 Version: 5.0
```

```
My Custom Toolbox
 Version: 1.0
```

Structure Containing Version for a Particular Product

Create a structure containing version information for just the Symbolic Math Toolbox product. The output shown here is representative. Your results might differ.

Determine the product name for Symbolic Math Toolbox by setting `n` to the name of a function unique to Symbolic Math Toolbox, such as `sym`.

```
n = 'sym';
pat = '(?<=^.+[\\/]toolbox[\\/])[^\\/]+';
regexp(which(n), pat, 'match', 'once')
```

```
ans =

symbolic
```

Specify the value returned in the previous step as an argument to `ver`.

```
v = ver('symbolic')
```

```
v =

        Name: 'Symbolic Math Toolbox'
     Version: '5.11'
     Release: '(R2013b)'
        Date: '19-May-2013'
```

Input Arguments

`product` — product-specific information

character vector

The product or toolbox for which you want to view version information, specified as a character vector.

Output Arguments

`product_info` — product name, version, release, and date

structure array

Product name, version, release, and date, returned as a structure array with these fields: `Name`, `Version`, `Release`, and `Date`. If a license is a trial version, the letter `T` precedes the value in the `Version` field.

Tips

- To view version information about installed Add-Ons, including MathWorks products in the Add-On Manager, see "Manage Your Add-Ons".

See Also

See Also

`computer` | `help` | `license` | `matlabshared.supportpkg.getInstalled` | `verlessthan` | `version`

Topics

"Information About Your Installation"
"Create Help Summary Files — Contents.m"

Introduced before R2006a

matlab.unittest.Verbosity class

Package: matlab.unittest

Verbosity level enumeration class

Description

The `matlab.unittest.Verbosity` enumeration class provides a means to specify the level of detail related to running tests. A higher value results in a higher level of detail. The enumeration class contains the following members.

Numeric Representation	Enumeration Member Name	Verbosity Description
1	`Terse`	Minimal amount of information
2	`Concise`	Typical amount of information
3	`Detailed`	Supplemental amount of information
4	`Verbose`	Surplus of information

Construction

`matlab.unittest.Verbosity.`*`MemberName`* creates an instance of the verbosity level enumeration class.

Examples

Create Instance of Enumeration Class

```
n = matlab.unittest.Verbosity.Detailed
```

```
n 
  Detailed
```

Display information about the variables.

```
whos n
  Name      Size            Bytes  Class                        Attributes

  n         1x1               112  matlab.unittest.Verbosity
```

- "Define Enumeration Classes"

See Also

See Also

matlab.unittest.TestCase.log | matlab.unittest.TestRunner.withTextOutput | matlab.unittest.plugins.LoggingPlugin | matlab.unittest.plugins.TestRunProgressPlugin

Topics

"Define Enumeration Classes"

Introduced in R2014b

verctrl

(To be removed) Source control actions (Windows platforms)

Note: `verctrl` will be removed in a future release. Access source control actions through the context menu instead.

Syntax

```
verctrl('action',{'filename1','filename2',....},0)
result=verctrl('action',{'filename1','filename2',....},0)
verctrl('action','filename',0)
result=verctrl('isdiff','filename',0)
list = verctrl('all_systems')
```

Description

`verctrl('action',{'filename1','filename2',....},0)` performs the source control operation specified by `'action'` for a single file or multiple files. Enter one file as a character vector; specify multiple files using a cell array of character vectors. Use the full paths for each file name and include the extensions. Specify `0` as the last argument. Complete the resulting dialog box to execute the operation. Available values for `'action'` are as follows:

action Argument	Purpose
`'add'`	Adds files to the source control system. Files can be open in the Editor or closed when added.
`'checkin'`	Checks files into the source control system, storing the changes and creating a new version.
`'checkout'`	Retrieves files for editing.
`'get'`	Retrieves files for viewing and compiling, but not editing. When you open the files, they are labeled as read-only.

action Argument	Purpose
`'history'`	Displays the history of files.
`'remove'`	Removes files from the source control system. It does not delete the files from disk, but only from the source control system.
`'runscc'`	Starts the source control system. The file name can be an empty character vector.
`'uncheckout'`	Cancels a previous checkout operation and restores the contents of the selected files to the precheckout version. All changes made to the files since the checkout are lost.

`result=verctrl('action',{'filename1','filename2',....},0)` performs the source control operation specified by `'action'` on a single file or multiple files. The action can be any one of: `'add'`, `'checkin'`, `'checkout'`, `'get'`, `'history'`, or `'undocheckout'`. `result` is a logical `1` (true) when you complete the operation by clicking **OK** in the resulting dialog box, and is a logical `0` (false) when you abort the operation by clicking **Cancel** in the resulting dialog box.

`verctrl('action','filename',0)` performs the source control operation specified by `'action'` for a single file. Use the absolute path for `'filename'`. Specify `0` as the last argument. Complete any resulting dialog boxes to execute the operation. Available values for `'action'` are as follows:

action Argument	Purpose
`'showdiff'`	Displays the differences between a file and the latest checked in version of the file in the source control system.
`'properties'`	Displays the properties of a file.

`result=verctrl('isdiff','filename',0)` compares `filename` with the latest checked in version of the file in the source control system. `result` is a logical `1` (true) when the files are different, and is a logical `0` (false) when the files are identical. Use the full path for `'filename'`. Specify `0` as the last argument.

`list = verctrl('all_systems')` displays in the Command Window a list of all source control systems installed on your computer.

Examples

Check In a File

Check in `D:\file1.ext` to the source control system:

```
result = verctrl('checkin','D:\file1.ext', 0)
```

This opens the Check in file(s) dialog box. Click **OK** to complete the check in. MATLAB displays

```
 result = 1
```

indicating the checkin was successful.

Add Files to the Source Control System

Add `D:\file1.ext` and `D:\file2.ext` to the source control system.

```
verctrl('add',{'D:\file1.ext','D:\file2.ext'}, 0)
```

This opens the Add to source control dialog box. Click **OK** to complete the operation.

Display the Properties of a File

Display the properties of `D:\file1.ext`.

```
verctrl('properties','D:\file1.ext', 0)
```

This opens the source control properties dialog box for your source control system. The function is complete when you close the properties dialog box.

Show Differences for a File

To show the differences between the version of `file1.ext` that you just edited and saved, with the last version in source control, run

```
verctrl('showdiff','D:\file1.ext',0)
```

MATLAB displays differences dialog boxes and results specific to your source control system. After checking in the file, if you run this statement again, MATLAB displays

```
??? The file is identical to latest version under source control.
```

List All Installed Source Control Systems

To view all of the source control systems installed on your computer, type

```
list = verctrl ('all_systems')
```

MATLAB displays all the source control systems currently installed on your computer. For example:

```
list =
'Microsoft Visual SourceSafe'
'ComponentSoftware RCS'
```

See Also

Topics

"MSSCCI Source Control Interface"

Introduced before R2006a

verLessThan

Compare toolbox version to specified character vector

Syntax

```
tf = verLessThan(toolbox,version)
```

Description

`tf = verLessThan(toolbox,version)` returns logical 1 (`true`) if the version of the toolbox is older than the value specified by `version`. Otherwise, it returns logical 0 (`false`). Use this function to write code that runs on multiple versions of MATLAB, when there are differences in the behavior of the code in the different versions.

Examples

Write Version-Specific Code

Modify code that runs in MATLAB R2014a, but that generates an error in R2014b or later.

Create two surface plots. The default color palates are different depending on which version of MATLAB you are using.

```
s1 = surface(magic(5));
s2 = surface(magic(5)*10,'FaceColor','yellow');
```

Modify surface `s2` by the color of the surface underneath. Starting in R2014b, the `EraseMode` property has been removed from all graphics objects. Replace the `EraseMode` property with a value of the `FaceAlpha` property for code running in MATLAB R2014b and later.

```
if verLessThan('matlab','8.4')
    % -- Code to run in MATLAB R2014a and earlier here --
    s2.EraseMode = 'xor';
else
```

```
    % -- Code to run in MATLAB R2014b and later here --
    s2.FaceAlpha = .25;
end
```

Check for Minimum Required Version

Compare the Simulink version that is running against version 4.0. If the version is earlier than 4.0, display an error message because the feature is not supported.

```
if verLessThan('simulink','4.0')
    error('Simulink 4.0 or higher is required.')
end
```

Check Toolbox Version

Compare the Data Acquisition Toolbox version that MATLAB is running.

Find the name of the toolbox folder. Your output depends on the toolboxes installed on your system.

```
dir([matlabroot '/toolbox/d*'])
```

```
   daq        database   des      distcomp   dotnetbuilder
   dastudio   datafeed   dials    dml        dspblks
```

Use the toolbox folder name, `daq`.

```
verLessThan('daq','3')
```

```
ans =

     0
```

MATLAB is running Data Acquisition Toolbox version 3 or later.

Input Arguments

`toolbox` — Name of MATLAB toolbox folder

character vector

Name of MATLAB toolbox folder, specified as a character vector. To specify `toolbox`, find the folder containing the `Contents.m` file for the toolbox and use that folder name. To see a list of all toolbox folder names, type:

```
dir([matlabroot '/toolbox'])
```

If `toolbox` does not exist, MATLAB displays an error.

Example: `'images'`

`version` — Version number to compare against
character vector

Version number of the program or toolbox to compare against, specified as a character vector. Specify the version number in the form of `major[.minor[.revision]]`.

Example: `'9.2'`

See Also

See Also

`dir` | `ismac` | `ispc` | `isunix` | `license` | `ver` | `version`

Introduced in R2007a

version

Version number for MATLAB and libraries

Syntax

```
version
version -date
version -description
version -release
version -java
v = version('-versionOption')
[v d] = version
```

Description

`version` returns in `ans` the version and release number for the MATLAB software currently running.

`version -date` returns in `ans` the release date for the MATLAB software.

`version -description` returns in `ans` a description of the version. Usually, the description is for special versions, such as beta versions.

`version -release` returns in `ans` the release number for the MATLAB software currently running.

`version -java` returns in `ans` the version of the Oracle JVM software that MATLAB is using.

`v = version('-versionOption')`, where *`versionOption`* is one of the above options, is an alternate form of the syntax.

`[v d] = version` returns the version and release number in character vector `v` and the release date in character vector `d`. No input arguments are allowed in this syntax.

Examples

Display MATLAB Version

```
version
```

```
ans =
'9.2.0.538062 (R2017a)'
```

Display MATLAB Release

Display the release, prefaced by descriptive text.

```
['Release R' version('-release')]
```

```
ans =
'Release R2017a'
```

Display Release Version and Date as Separate Values

```
[v d] = version
```

```
v =
'9.2.0.538062 (R2017a)'

d =
'February 23, 2017'
```

Display Java Version

```
version -java
```

```
ans =
'Java 1.7.0_60-b19 with Oracle Corporation Java HotSpot(TM) 64-Bit Server VM mixed mode
```

See Also

`computer` | `ver` | `verlessthan`

Topics

"Check for Software Updates"

Introduced before R2006a

vertcat

Concatenate arrays vertically

Syntax

```
C = vertcat(A1,...,AN)
```

Description

`C = vertcat(A1,...,AN)` vertically concatenates arrays `A1,...,AN`. All arrays in the argument list must have the same number of columns.

- If the inputs are multidimensional arrays, `vertcat` concatenates N-dimensional arrays along the first dimension. The remaining dimensions must match.
- If the inputs are tables, `vertcat` concatenates by matching variable names. Variable names for all tables must be identical, except for order. Row names, when present, must be unique across tables.

  `vertcat` fills in default row names when some of the inputs have names and some do not. `vertcat` assigns values for each table property (except for `RowNames`) using the first nonempty value for the corresponding property in the tables `A1,...,AN`.

  If the inputs are timetables, then column names must be the same.

`vertcat` also concatenates character arrays. Each array being concatenated must have the same number of characters.

MATLAB calls `C = vertcat(A1, A2, ...)` for the syntax `C = [A1; A2; ...]` when any of the inputs are an object.

Tips

To concatenate categorical arrays, see “Combine Categorical Arrays”.

If all the input arrays are ordinal categorical arrays, they must have the same sets of categories including their order. For more information, see “Ordinal Categorical Arrays”.

You can concatenate datetime arrays with cell arrays of character arrays.

You can concatenate duration arrays and calendar duration arrays. The result is a calendar duration array.

You can concatenate duration or calendar duration arrays with numeric arrays. Prior to concatenation, MATLAB converts the numeric array to an array of equivalent days using the `days` function.

You can concatenate string arrays with numeric arrays, logical arrays, character vectors, or cell arrays. The non-string arrays are first converted to a string array, and the output is returned as a string array.

For information on combining unlike integer types, integers with nonintegers, cell arrays with non-cell arrays, or empty matrices with other elements, see "Valid Combinations of Unlike Classes".

Examples

Vertically Concatenate Two Matrices

Create a 5-by-3 matrix, A.

```
A = magic(5);
A(:, 4:5) = []
```

```
A =

    17    24     1
    23     5     7
     4     6    13
    10    12    19
    11    18    25
```

Create a 3-by-3 matrix, B.

```
B = magic(3)*100
```

```
B =

   800   100   600
   300   500   700
```

```
   400   900   200
```

Vertically concatenate A and B.

```
C = vertcat(A,B)
```

```
C =

    17    24     1
    23     5     7
     4     6    13
    10    12    19
    11    18    25
   800   100   600
   300   500   700
   400   900   200
```

Vertically Concatenate Two Tables

Create a table, A, with three rows and five variables.

```
A = table([5;6;5],['M';'M';'M'],[45;41;40],[45;32;34],{'NY';'CA';'MA'},...
    'VariableNames',{'Age' 'Gender' 'Height' 'Weight' 'Birthplace'},...
    'RowNames',{'Thomas' 'Gordon' 'Percy'})
```

```
A = 3×5 table
              Age    Gender    Height    Weight    Birthplace
              ___    ______    ______    ______    __________

    Thomas    5      M         45        45        'NY'
    Gordon    6      M         41        32        'CA'
    Percy     5      M         40        34        'MA'
```

Create a table, B, with the same variables as A except for order.

```
B = table(['F';'M';'F'],[6;6;5],{'AZ';'NH';'CO'},[31;42;33],[39;43;40],...
    'VariableNames',{'Gender' 'Age' 'Birthplace' 'Weight' 'Height'})
```

```
B = 3×5 table
    Gender    Age    Birthplace    Weight    Height
    ______    ___    __________    ______    ______
```

```
    F          6       'AZ'          31         39
    M          6       'NH'          42         43
    F          5       'CO'          33         40
```

Vertically concatenate tables A and B.

```
C = vertcat(A,B)
```

```
C = 6×5 table
               Age    Gender    Height    Weight    Birthplace
               ___    ______    ______    ______    __________

    Thomas     5      M         45        45        'NY'
    Gordon     6      M         41        32        'CA'
    Percy      5      M         40        34        'MA'
    Row4       6      F         39        31        'AZ'
    Row5       6      M         43        42        'NH'
    Row6       5      F         40        33        'CO'
```

The variables of C are in the same order as the variables of A and default row names are used for the rows from B.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

Tall arrays do not support vertical concatenation.

For more information, see “Tall Arrays”.

See Also

cat | horzcat

Topics

"Concatenation Methods"

Introduced before R2006a

vertcat (tscollection)

Vertical concatenation for `tscollection` objects

Syntax

```
tsc = vertcat(tsc1,tsc2,...)
```

Description

`tsc = vertcat(tsc1,tsc2,...)` performs

```
tsc = [tsc1;tsc2;...]
```

This operation appends `tscollection` objects. The time vectors must not overlap. The last time in tsc1 must be earlier than the first time in tsc2. All `tscollection` objects to be concatenated must have the same `timeseries` members.

See Also

`horzcat (tscollection)` | `tscollection`

Introduced before R2006a

vertexAttachments

Class: TriRep

(Not recommended) Return simplices attached to specified vertices

---

Note: `vertexAttachments(TriRep)` is not recommended. Use vertexAttachments(triangulation) instead.

`TriRep` is not recommended. Use triangulation instead.

Syntax

```
SI = vertexAttachments(TR, VI)
```

Description

`SI = vertexAttachments(TR, VI)` returns the vertex-to-simplex information for the specified vertices `VI`. For 2-D triangulations in MATLAB, the triangles `SI` are arranged in counter-clockwise order around the attached vertex `VI`.

Input Arguments

`TR`	Triangulation representation
`VI`	`VI` is a column vector of indices into the array of points representing the vertex coordinates, `TR.X`. The simplices associated with vertex `i` are the `i`'th entry in the cell array. If `VI` is not specified the vertex-simplex information for the entire triangulation is returned.

Output Arguments

`SI`	Cell array of indices of the simplices attached to a vertex. A cell array is used to store the information because the number of simplices

associated with each vertex can vary. The simplices associated with vertex `i` are in the `i`'th entry in the cell array `SI`.

Examples

Example 1

Load a 2-D triangulation and use `TriRep` to compute the vertex-to-triangle relations.

```
load trimesh2d
trep = TriRep(tri, x, y);
```

Find the indices of the tetrahedra attached to the first vertex:

```
Tv = vertexAttachments(trep, 1)
Tv{:}
```

Example 2

Perform a direct query of a 2-D triangulation created using `DelaunayTri`.

```
x = rand(20,1);
y = rand(20,1);
dt = DelaunayTri(x,y);
```

Find the triangles attached to vertex 5:

```
t = vertexAttachments(dt,5);
```

Plot the triangulation:

```
triplot(dt);
hold on;
```

Plot the triangles attached to vertex 5 (in red):

```
triplot(dt(t{:},:),x,y,'Color','r');
hold off;
```

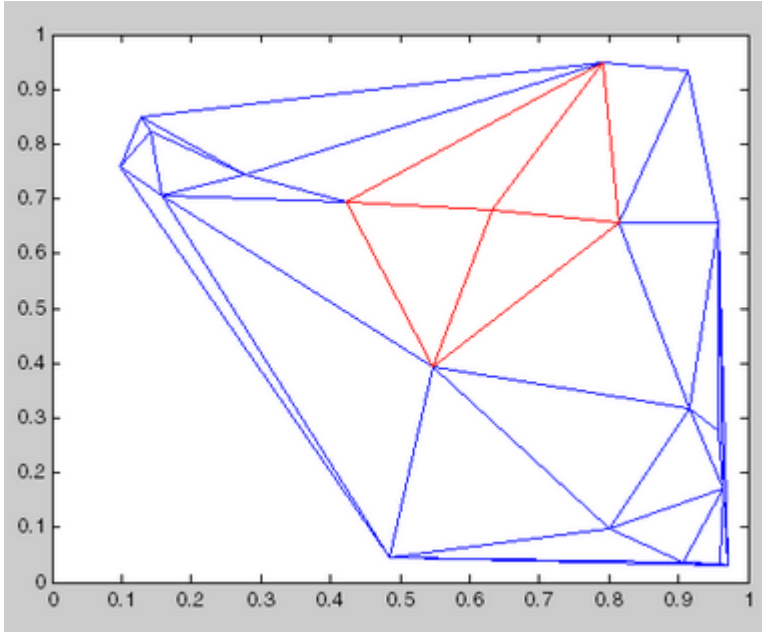

Definitions

Simplex

A simplex is a triangle/tetrahedron or higher dimensional equivalent.

See Also

triangulation | delaunayTriangulation

VideoReader

Create object to read video files

Syntax

```
v = VideoReader(filename)
v = VideoReader(filename,Name,Value)
```

Description

`v = VideoReader(filename)` creates object `v` to read video data from the file named `filename`.

`v = VideoReader(filename,Name,Value)` creates the object with additional options specified by one or more name-value pair arguments.

Examples

Create VideoReader Object and Read Video

Create a `VideoReader` object for the example movie file, `xylophone.mp4`.

```
v = VideoReader('xylophone.mp4');
```

Read all video frames.

```
while hasFrame(v)
    video = readFrame(v);
end
whos video
```

```
  Name          Size                 Bytes  Class    Attributes

  video       240x320x3             230400  uint8
```

Input Arguments

`filename` — File name

character vector

File name, specified as a character vector.

`VideoReader` supports these file formats:

Platforms	File Formats
All Platforms	AVI, including uncompressed, indexed, grayscale, and Motion JPEG-encoded video (`.avi`) Motion JPEG 2000 (`.mj2`)
All Windows	MPEG-1 (`.mpg`) Windows Media Video (`.wmv`, `.asf`, `.asx`) Any format supported by Microsoft DirectShow®
Windows 7 or later	MPEG-4, including H.264 encoded video (`.mp4`, `.m4v`) Apple QuickTime Movie (`.mov`) Any format supported by Microsoft Media Foundation
Macintosh	Most formats supported by QuickTime Player, including: MPEG-1 (`.mpg`) MPEG-4, including H.264 encoded video (`.mp4`, `.m4v`) Apple QuickTime Movie (`.mov`) 3GPP 3GPP2 AVCHD DV **Note:** For OS X Yosemite (Version 10.10) and later, MPEG-4/H.264 files written using `VideoWriter`, play correctly, but display an inexact frame rate.

Platforms	File Formats
Linux	Any format supported by your installed plug-ins for GStreamer 1.0 or higher, as listed on http://gstreamer.freedesktop.org/documentation/plugins.html, including Ogg Theora (`.ogg`).

Example: `'myFile.mp4'`

Example: `'../dir/videos/myFile.avi'`

Data Types: `char`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `v = VideoReader('myFile.avi','CurrentTime',35.2)` creates a `VideoReader` object to read `myFile.avi`, starting from the video frame that is 35.2 seconds from the beginning of the file.

`'CurrentTime'` — Timestamp of video frame to read

`0` (default) | numeric scalar

Timestamp of the video frame to read, specified as the name-value pair consisting of `'CurrentTime'` and a numeric scalar. The timestamp is specified in seconds from the start of the video file. The value of `CurrentTime` can be between zero and the duration of the video.

Note: On some platforms, when you create a `VideoReader` object, the `'CurrentTime'` property might contain a value close to, but not exactly, zero. This variation in the value of the `'CurrentTime'` property is due to differences in how each platform processes and reads videos.

Example: `'CurrentTime',5.6`

Data Types: `double`

`'Tag'` — Text data

`''` (default) | character vector

Text data, specified as the name-value pair consisting of `'Tag'` and a character vector.

Example: `'Tag','Experiment 109'`

Data Types: `char`

`'UserData'` — User-defined data
[ ] (default) | any

User-defined data, specified as the name-value pair consisting of `'UserData'` and a value of any data type.

Output Arguments

`v` — Output `VideoReader` object
`VideoReader` object

Output `VideoReader` object. After you create a `VideoReader` object, you can read video files using object functions. See VideoReader for details.

Tips

- The macOS platform no longer supports certain older video file formats. To read such files using `VideoReader`:
  - Open the video file using the QuickTime player. If the file is detected to be of an older format, the player automatically converts it into a newer format.
  - Save the newly converted video file.
  - Use the `VideoReader` to read this newly converted video file.

See Also

See Also
`mmfileinfo` | `VideoWriter`

Topics
"Read Video Files"

Introduced in R2010b

VideoReader

Read video files

Description

`VideoReader` objects are associated with files containing video data.

`VideoReader` supports the following file formats.

Platforms	File Formats
All Platforms	AVI, including uncompressed, indexed, grayscale, and Motion JPEG-encoded video (`.avi`) Motion JPEG 2000 (`.mj2`)
All Windows	MPEG-1 (`.mpg`) Windows Media Video (`.wmv`, `.asf`, `.asx`) Any format supported by Microsoft DirectShow
Windows 7 or later	MPEG-4, including H.264 encoded video (`.mp4`, `.m4v`) Apple QuickTime Movie (`.mov`) Any format supported by Microsoft Media Foundation
Macintosh	Most formats supported by QuickTime Player, including: MPEG-1 (`.mpg`) MPEG-4, including H.264 encoded video (`.mp4`, `.m4v`) Apple QuickTime Movie (`.mov`) 3GPP 3GPP2 AVCHD DV **Note:** For OS X Yosemite (Version 10.10) and later, MPEG-4/H.264 files written

Platforms	File Formats
	using `VideoWriter`, play correctly, but display an inexact frame rate.
Linux	Any format supported by your installed plug-ins for GStreamer 1.0 or higher, as listed on http://gstreamer.freedesktop.org/documentation/plugins.html, including Ogg Theora (`.ogg`).

Use dot notation to view or modify a particular property of a `VideoReader` object. For example, this command finds the value of the `Duration` property of the `VideoReader` object, `v`.

```
D = v.Duration;
```

Properties are read only, except `CurrentTime`, `Tag`, and `UserData`. Modify the `CurrentTime` property to begin reading from a particular time in the video file.

Create Object

Create `VideoReader` objects using the `VideoReader` function.

Properties

`BitsPerPixel` — Bits per pixel of video data

numeric scalar

This property is read-only.

Bits per pixel of the video data, specified as a numeric scalar.

Data Types: `double`

`CurrentTime` — Timestamp of video frame to read

numeric scalar

Timestamp of the video frame to read, specified as a numeric scalar. Specify the timestamp in seconds from the start of the video file. The value of `CurrentTime` can be between zero and the duration of the video.

Example: `120.54`

Data Types: `double`

`Duration` — Length of file
numeric scalar

This property is read-only.

Length of the file in seconds, specified as a numeric scalar.

Data Types: `double`

`FrameRate` — Number of video frames per second
numeric scalar

This property is read-only.

Number of video frames per second, specified as a numeric scalar. For variable-frame rate video, `FrameRate` is the average frame rate.

Note: For OS X Yosemite (Version 10.10) and later, MPEG-4/H.264 files written using `VideoWriter`, play correctly, but display an inexact frame rate.

Data Types: `double`

`Height` — Height of video frame
numeric scalar

This property is read-only.

Height of the video frame in pixels, specified as a numeric scalar.

Data Types: `double`

`Name` — File name
character vector

This property is read-only.

File name, specified as a character vector.

Data Types: `char`

`NumberOfFrames` — Number of frames in video stream
numeric scalar

This property is read-only.

Note: `NumberOfFrames` is not recommended. Use `CurrentTime` instead.

Number of frames in the video stream, specified as a numeric scalar.

Data Types: `double`

`Path` — Full path to video file

character vector

This property is read-only.

Full path to the video file associated with the reader object, specified as a character vector.

Data Types: `char`

`Tag` — Generic text

`''` (default) | character vector

Generic text field

Data Types: `char`

`UserData` — User-defined data

`[]` (default)

User-defined data. `UserData` can be any data type.

`VideoFormat` — MATLAB representation of video format

character vector

This property is read-only.

MATLAB representation of the video format, specified as a character vector.

For all file types except Motion JPEG 2000 files, `VideoFormat` is one of the following.

Video Format	Value of `VideoFormat`
AVI or MPEG-4 files with RGB24 video	`'RGB24'`
AVI files with indexed video	`'Indexed'`

Video Format	Value of `VideoFormat`
AVI files with grayscale video	`'Grayscale'`

For Motion JPEG 2000 files, `VideoFormat` is one of the following.

Format of Image Data	Value of `VideoFormat`
Single-band `uint8`	`'Mono8'`
Single-band `int8`	`'Mono8 Signed'`
Single-band `uint16`	`'Mono16'`
Single-band `int16`	`'Mono16 Signed'`
Three-banded `uint8`	`'RGB24'`
Three-banded `int8`	`'RGB24 Signed'`
Three-banded `uint16`	`'RGB48'`
Three-banded `int16`	`'RGB48 Signed'`

`Width` — Width of video frame

numeric scalar.

This property is read-only.

Width of the video frame in pixels, specified as a numeric scalar.

Data Types: `double`

Object Functions

read	Read video frame data from file
VideoReader.getFileFormats	File formats that VideoReader supports
readFrame	Read video frame from video file
hasFrame	Determine if frame is available to read

Examples

Create VideoReader Object and Read Video

Create a `VideoReader` object for the example movie file, `xylophone.mp4`.

```
v = VideoReader('xylophone.mp4');
```

Read all video frames.

```
while hasFrame(v)
    video = readFrame(v);
end
whos video
```

```
  Name          Size                 Bytes  Class    Attributes

  video       240x320x3             230400  uint8
```

Read Video Starting at Specific Time

Create an object to read the sample file, `xylophone.mp4`.

```
v = VideoReader('xylophone.mp4');
```

Specify that reading should begin 2.5 seconds from the beginning of the video.

```
v.CurrentTime = 2.5;
```

Create an axes. Then, read video frames until no more frames are available to read.

```
currAxes = axes;
while hasFrame(v)
    vidFrame = readFrame(v);
    image(vidFrame, 'Parent', currAxes);
    currAxes.Visible = 'off';
    pause(1/v.FrameRate);
end
```

- "Read Video Files"

See Also

See Also

`VideoWriter`

Topics

"Read Video Files"

Introduced in R2010b

VideoReader.getFileFormats

File formats that `VideoReader` supports

Syntax

```
formats = VideoReader.getFileFormats()
```

Description

`formats = VideoReader.getFileFormats()` returns an array of `audiovideo.FileFormatInfo` objects that indicate which formats `VideoReader` can read on the current system.

Examples

View Supported File Formats for Your System

View the list of file formats that `VideoReader` supports on your system.

```
fmts = VideoReader.getFileFormats()
```

```
Video File Formats:
    .asf - ASF File
    .asx - ASX File
    .avi - AVI File
    .m4v - MPEG-4 Video
    .mj2 - Motion JPEG2000
    .mov - QuickTime movie
    .mp4 - MPEG-4
    .mpg - MPEG-1
    .wmv - Windows Media Video
```

This output is for a Linux® system. Your results might differ.

Check if File Format is Supported

Check whether `VideoReader` can read AVI files on the current system.

```
fmtList = VideoReader.getFileFormats();

if any(ismember({fmtList.Extension},'avi'))
     disp('VideoReader can read AVI files on this system.');
else
     disp('VideoReader cannot read AVI files on this system.');
end
```

```
VideoReader can read AVI files on this system.
```

Create Dialog Box to Select Video File

Create a dialog box that allows a user to select a video file interactively.

Get the supported file formats.

```
formats = VideoReader.getFileFormats()
```

```
Video File Formats:
    .asf - ASF File
    .asx - ASX File
    .avi - AVI File
    .m4v - MPEG-4 Video
    .mj2 - Motion JPEG2000
    .mov - QuickTime movie
    .mp4 - MPEG-4
    .mpg - MPEG-1
    .wmv - Windows Media Video
```

This output is for a Windows system. Your results might differ.

Convert the `formats` array to a filter list.

```
filterSpec = getFilterSpec(formats)
```

```
filterSpec =

    '*.asf;*.asx;*.avi;*.m4v;*.mj2;*.mov;*.mp4;*.mpg;*.wmv;'     'All Video Files'
    '*.asf'                                                      'ASF File (*.asf)'
    '*.asx'                                                      'ASX File (*.asx)'
    '*.avi'                                                      'AVI File (*.avi)'
    '*.m4v'                                                      'MPEG-4 Video (*.m4v)'
    '*.mj2'                                                      'Motion JPEG2000 (*.mj2
    '*.mov'                                                      'QuickTime movie (*.mov
    '*.mp4'                                                      'MPEG-4 (*.mp4)'
```

```
    '*.mpg'                                                    'MPEG-1 (*.mpg)'
    '*.wmv'                                                    'Windows Media Video (
    '*.*'                                                      'All Files (*.*)'
```

`filterSpec` is a cell array that includes `'All Video Files'` in the first row, and `'All Files (*.*)'` in the last row.

Create the dialog box using `uigetfile`.

```
[filename,pathname] = uigetfile(filterSpec);
```

Output Arguments

`formats` — Supported video file formats

array of `audiovideo.FileFormatInfo` objects

Supported video file formats, returned as an array of `audiovideo.FileFormatInfo` objects with the following properties.

`Extension`	File extension.
`Description`	Text description of the file format.
`ContainsVideo`	Logical value that indicates whether `VideoReader` can read video from this format.
`ContainsAudio`	Logical value that indicates whether `VideoReader` can read audio from this format.

`VideoReader` cannot always read a particular video file even if `getFileFormats` lists its format. For more information, see Supported Video File Formats.

On Windows and UNIX systems, the list of file formats does not always contain all the formats that `VideoReader` can read on your system. `getFileFormats` returns a platform-dependent, static list of formats that `VideoReader` can read on most systems.

See Also

See Also

`uigetfile` | `VideoReader`

Introduced in R2010b

hasFrame

Determine if frame is available to read

Syntax

```
tf = hasFrame(v)
```

Description

`tf = hasFrame(v)` returns logical `1` (`true`) if there is a video frame available to read from the file. Otherwise, it returns logical `0` (`false`).

Examples

Create VideoReader Object and Read Video

Create a `VideoReader` object for the example movie file, `xylophone.mp4`.

```
v = VideoReader('xylophone.mp4');
```

Read all video frames.

```
while hasFrame(v)
    video = readFrame(v);
end
whos video
```

```
  Name         Size                Bytes  Class    Attributes

  video      240x320x3            230400  uint8
```

Read and Play Back Movie File

Read and play back the sample movie file, `xylophone.mp4`.

Create a `VideoReader` object to read data from the sample file. Then, determine the width and height of the video.

```
xyloObj = VideoReader('xylophone.mp4');

vidWidth = xyloObj.Width;
vidHeight = xyloObj.Height;
```

Create a movie structure array, `mov`.

```
mov = struct('cdata',zeros(vidHeight,vidWidth,3,'uint8'),...
    'colormap',[]);
```

Read one frame at a time until the end of the video is reached.

```
k = 1;
while hasFrame(xyloObj)
    mov(k).cdata = readFrame(xyloObj);
    k = k+1;
end
```

Size a figure based on the width and height of the video. Then, play back the movie once at the video frame rate.

```
hf = figure;
set(hf,'position',[150 150 vidWidth vidHeight]);

movie(hf,mov,1,xyloObj.FrameRate);
```

- "Read Video Files"

Input Arguments

v — Input VideoReader object

`VideoReader` object

Input VideoReader object. Use the `VideoReader` function to create a VideoReader object from your video file.

See Also

See Also

`movie` | `readFrame` | VideoReader

Topics

"Read Video Files"

Introduced in R2014b

read

Read video frame data from file

Compatibility

`VideoReader.read` is not recommended. Use VideoReader.readFrame instead.

Syntax

```
video = read(v)
video = read(v,index)
video = read( ___ ,'native')
```

Description

`video = read(v)` reads all video frames from the file associated with `v`.

`video = read(v,index)` reads only the frames specified by `index`.

`video = read( ___ ,'native')` returns data in the format specified by the `VideoFormat` property and can include any of the input arguments in the previous syntaxes.

Examples

Select Video Frames to Read

Create a `VideoReader` object for the example movie file, `xylophone.mp4`.

```
v = VideoReader('xylophone.mp4');
```

Read only the first video frame.

```
video = read(v,1);
```

Read only the last video frame.

```
video = read(v,Inf);
```

Read frames 5 through 10.

```
video = read(v,[5 10]);
```

Read from the 50th frame to the end of the video file.

```
video = read(v,[50 Inf]);
```

Input Arguments

v — Input VideoReader object

`VideoReader` object

Input VideoReader object. Use the `VideoReader` function to create a VideoReader object from your video file.

index — Frames to read

`[1 Inf]` (default) | numeric scalar | two-element array

Frames to read, specified as a numeric scalar or a two-element array.

- To read a single frame, specify a numeric scalar.
- To read a range of frames, specify a two-element array.

The first frame number is 1, and `Inf` represents the last frame of the file.

Example: `10`

Example: `Inf`

Example: `[1 20]`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

Output Arguments

video — Video frame data

numeric array | structure array

Video frame data, returned as a numeric or structure array. The size and format of `video` depends on the `VideoFormat` property of `v`. When the `VideoFormat` property of `v` is `'Indexed'` or `'Grayscale'`, the data type and dimensions of `video` depend on whether you call `read` with the `'native'` argument. For most files, the data type and dimensions of `video` are as follows.

`H` is the image frame height, `W` is the image frame width, and `F` is the number of frames read.

Value of `obj.VideoFormat`	Data Type of `video`	Dimensions of `video`	Description
`'RGB24'`, with or without specifying `'native'`	`uint8`	H-by-W-by-3-by-F	RGB24 image
`'Grayscale'`, without specifying `'native'`	`uint8`	H-by-W-by-1-by-F	Grayscale image
`'Indexed'`, without specifying `'native'`	`uint8`	H-by-W-by-3-by-F	RGB24 image
`'Grayscale'` or `'Indexed'`, specifying `'native'`	`struct`	1-by-F	MATLAB movie, which is an array of frame structure arrays, each containing the fields `cdata` and `colormap`.

For Motion JPEG 2000 files, the data type and dimensions of `video` are as follows.

Value of `obj.VideoFormat`	Data Type of `video`	Dimensions of `video`	Description
`'Mono8'`	`uint8`	H-by-W-by-1-by-F	Mono image
`'Mono8 Signed'`	`int8`	H-by-W-by-1-by-F	Mono signed image
`'Mono16'`	`uint16`	H-by-W-by-1-by-F	Mono image
`'Mono16 Signed'`	`int16`	H-by-W-by-1-by-F	Mono signed image
`'RGB24'`	`uint8`	H-by-W-by-3-by-F	RGB24 image

Value of `obj.VideoFormat`	Data Type of `video`	Dimensions of `video`	Description
`'RGB24 Signed'`	`int8`	H-by-W-by-3-by-F	RGB24 signed image
`'RGB48'`	`uint16`	H-by-W-by-3-by-F	RGB48 image
`'RGB48 Signed'`	`int16`	H-by-W-by-3-by-F	RGB48 signed image

See Also

See Also

`movie` | `VideoReader`

Introduced in R2010b

readFrame

Read video frame from video file

Syntax

```
video = readFrame(v)
video = readFrame(v,'native')
```

Description

`video = readFrame(v)` reads the next available video frame from the file associated with `v`.

`video = readFrame(v,'native')` returns data in the format specified by the `VideoFormat` property.

Examples

Create VideoReader Object and Read Video

Create a `VideoReader` object for the example movie file, `xylophone.mp4`.

```
v = VideoReader('xylophone.mp4');
```

Read all video frames.

```
while hasFrame(v)
    video = readFrame(v);
end
whos video
```

```
  Name          Size                 Bytes  Class    Attributes

  video       240x320x3             230400  uint8
```

Read Video Starting at Specific Time

Create an object to read the sample file, `xylophone.mp4`.

```
v = VideoReader('xylophone.mp4');
```

Specify that reading should begin 2.5 seconds from the beginning of the video.

```
v.CurrentTime = 2.5;
```

Create an axes. Then, read video frames until no more frames are available to read.

```
currAxes = axes;
while hasFrame(v)
    vidFrame = readFrame(v);
    image(vidFrame, 'Parent', currAxes);
    currAxes.Visible = 'off';
    pause(1/v.FrameRate);
end
```

Read and Play Back Movie File

Read and play back the sample movie file, `xylophone.mp4`.

Create a `VideoReader` object to read data from the sample file. Then, determine the width and height of the video.

```
xyloObj = VideoReader('xylophone.mp4');

vidWidth = xyloObj.Width;
vidHeight = xyloObj.Height;
```

Create a movie structure array, `mov`.

```
mov = struct('cdata',zeros(vidHeight,vidWidth,3,'uint8'),...
    'colormap',[]);
```

Read one frame at a time until the end of the video is reached.

```
k = 1;
while hasFrame(xyloObj)
    mov(k).cdata = readFrame(xyloObj);
    k = k+1;
end
```

Size a figure based on the width and height of the video. Then, play back the movie once at the video frame rate.

```
hf = figure;
```

```
set(hf,'position',[150 150 vidWidth vidHeight]);

movie(hf,mov,1,xyloObj.FrameRate);
```

- "Read Video Files"

Input Arguments

v — Input VideoReader object

`VideoReader` object

Input VideoReader object. Use the `VideoReader` function to create a VideoReader object from your video file.

Output Arguments

video — Video frame data

array

Video frame data, returned as an array. The dimensions and data type of `video` depend on the `VideoFormat` property of `obj`.

The following table lists the data type and dimensions of `video` for most files. `H` is the image frame height and `W` is the image frame width. When the `VideoFormat` property of `obj` is `'Indexed'`, the data type and dimensions of `video` depend on whether you call `read` with the `'native'` argument.

Value of `obj.VideoFormat`	Data Type of `video`	Dimensions of `video`	Description
`'RGB24'`, with or without specifying `'native'`	`uint8`	H-by-W-by-3	RGB24 image
`'Grayscale'`, without specifying `'native'`	`uint8`	H-by-W-by-1	Grayscale image
`'Indexed'`, without specifying `'native'`	`uint8`	H-by-W-by-3	RGB24 image

Value of `obj.VideoFormat`	Data Type of `video`	Dimensions of `video`	Description
`'Grayscale'` or `'Indexed'`, specifying `'native'`	`struct`	1-by-1	MATLAB movie, which is an array of frame structure arrays, each containing the fields `cdata` and `colormap`.

For Motion JPEG 2000 files, the data type and dimensions of `video` are as follows.

Value of `obj.VideoFormat`	Data Type of `video`	Dimensions of `video`	Description
`'Mono8'`	`uint8`	H-by-W-by-1	Mono image
`'Mono8 Signed'`	`int8`	H-by-W-by-1	Mono signed image
`'Mono16'`	`uint16`	H-by-W-by-1	Mono image
`'Mono16 Signed'`	`int16`	H-by-W-by-1	Mono signed image
`'RGB24'`	`uint8`	H-by-W-by-3	RGB24 image
`'RGB24 Signed'`	`int8`	H-by-W-by-3	RGB24 signed image
`'RGB48'`	`uint16`	H-by-W-by-3	RGB48 image
`'RGB48 Signed'`	`int16`	H-by-W-by-3	RGB48 signed image

See Also

See Also

`hasFrame` | `movie` | `VideoReader`

Topics

"Read Video Files"

Introduced in R2014b

VideoWriter

Create object to write video files

Syntax

```
v = VideoWriter(filename)
v = VideoWriter(filename,profile)
```

Description

`v = VideoWriter(filename)` creates a `VideoWriter` object to write video data to an AVI file with Motion JPEG compression.

`v = VideoWriter(filename,profile)` creates a `VideoWriter` object and applies a set of properties tailored to a specific file format (such as `'MPEG-4'` or `'Uncompressed AVI'`).

Examples

Create VideoWriter Object and Write Video

Create a `VideoWriter` object to write a Motion JPEG AVI file named `newfile.avi`.

```
v = VideoWriter('newfile.avi');
```

Open the file for writing and write a 300-by-300 matrix of data to the file.

```
open(v)
writeVideo(v,rand(300))
```

Close the file.

```
close(v)
```

Specify Profile for Uncompressed AVI and Write Video

Create an array containing data from the sample still image, `peppers.png`.

```
A = imread('peppers.png');
```

Create a `VideoWriter` object for a new uncompressed AVI file for RGB24 video.

```
v = VideoWriter('newfile.avi','Uncompressed AVI');
```

Open the file for writing.

```
open(v)
```

Write the image in `A` to the video file.

```
writeVideo(v,A)
```

Close the file.

```
close(v)
```

Input Arguments

`filename` — File name

character vector

File name, specified as a character vector. `VideoWriter` creates the file.

`VideoWriter` supports these file extensions.

`.avi`	AVI file
`.mj2`	Motion JPEG 2000 file
`.mp4` or `.m4v`	MPEG-4 file (systems with Windows 7 or later, or Mac OS X 10.7 and later)

If you do not specify a valid file extension, `VideoWriter` appends the extension `.avi`, `.mj2` or `.mp4`, depending on the value of the `profile` argument. If you do not specify a value for `profile`, then `VideoWriter` creates a Motion JPEG compressed AVI file with the extension `.avi`.

Example: `'myFile.avi'`

Example: `'../dir/videos/myFile.mj2'`

Data Types: `char`

`profile` — File type
`'Motion JPEG AVI'` (default) | `'Archival'` | `'Motion JPEG 2000'` | ...

File type, specified as one of the following.

Value of `profile`	Description
`'Archival'`	Motion JPEG 2000 file with lossless compression
`'Motion JPEG AVI'`	AVI file using Motion JPEG encoding
`'Motion JPEG 2000'`	Motion JPEG 2000 file
`'MPEG-4'`	MPEG-4 file with H.264 encoding (systems with Windows 7 or later, or Mac OS X 10.7 and later)
`'Uncompressed AVI'`	Uncompressed AVI file with `RGB24` video
`'Indexed AVI'`	Uncompressed AVI file with indexed video
`'Grayscale AVI'`	Uncompressed AVI file with grayscale video

`profile` sets default values for video properties such as `VideoCompressionMethod`.

Output Arguments

`v` — Output `VideoWriter` object
`VideoWriter`

Output `VideoWriter` object. After you create a `VideoWriter` object, you can write video files using object functions. See VideoWriter for details.

See Also

See Also
`mmfileinfo` | `VideoReader`

Topics

VideoWriter

Introduced in R2010b

VideoWriter

Write video files

Description

`VideoWriter` objects allow you to create video files from arrays or MATLAB movies.

You can use the `VideoWriter` function with a predefined *profile* to create a `VideoWriter` object with properties tailored to a specific format, such as `'Uncompressed AVI'` or `'MPEG-4'`. After you create the object, you can use dot notation to view or modify a particular property:

```
v = VideoWriter('newfile.mj2','Motion JPEG 2000');
v.CompressionRatio = 3;
```

Modify property values before opening the video file for writing. After you call the `open` function, you cannot change the value of a property.

Create Object

Create `VideoWriter` objects using the `VideoWriter` function.

Properties

`ColorChannels` — Number of color channels

positive integer

This property is read-only.

Number of color channels in each output video frame, specified as a positive integer:

- Uncompressed AVI, Motion JPEG AVI, and MPEG-4 files have three color channels.
- Indexed and grayscale AVI files have one color channel.
- For Motion JPEG 2000 files, the number of channels depends on the input data to the `writeVideo` function: one for monochrome image data, three for color data.

Data Types: `double`

`Colormap` — Color information for video file

`P`-by-3 numeric matrix

Color information for video file, specified as a numeric matrix with three columns and a maximum of 256 rows. Each row in the matrix defines one color using an RGB triplet. An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`.

You can set the colormap explicitly before the call to `open`, or by using the `colormap` field of a movie frame structure at the time of writing the first frame.

The `Colormap` property only applies to objects used for writing indexed AVI files.

Example: `colormap(summer(256))`

Data Types: `double` | `uint8`

`CompressionRatio` — Target compression ratio

`10` (default) | integer greater than 1

Target compression ratio, specified as an integer greater than 1. The compression ratio is the ratio between the number of bytes in the input image and the number of bytes in the compressed image. The video data is compressed as much as possible, up to the specified target.

`CompressionRatio` is available only for objects used for writing Motion JPEG 2000 files. After you call `open`, you cannot change the `CompressionRatio` value. If you previously set `LosslessCompression` to `true`, setting `CompressionRatio` generates an error.

Example: `5`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Duration` — Duration of output file

scalar value

This property is read-only.

Duration of the output file in seconds, specified as a scalar value.

Data Types: `double`

`FileFormat` — Type of file to write

`'avi'` | `'mp4'` | `'mj2'`

This property is read-only.

Type of file to write, specified as `'avi'`, `'mp4'`, or `'mj2'`.

`Filename` — Name of file

character vector

This property is read-only.

Name of file, specified as a character vector.

Data Types: `char`

`FrameCount` — Number of frames

integer

This property is read-only.

Number of frames written to the video file, specified as an integer.

Data Types: `double`

`FrameRate` — Rate of video playback

`30` (default) | positive number

Rate of video playback in frames per second, specified as a positive number.

After you call `open`, you cannot change the `FrameRate` value.

Example: `10`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Height` — Height of each video frame

scalar

This property is read-only.

Height of each video frame in pixels, specified as a scalar. The `writeVideo` method sets values for `Height` and `Width` based on the dimensions of the first frame.

MPEG-4 files require frame dimensions that are divisible by two. If the input frame height for an MPEG-4 file is not an even number, `VideoWriter` pads the frame with a row of black pixels at the bottom. For MPEG-4 files on Windows systems, the allowed value depends on the version of Windows. For example, on Windows 10 the allowed `Height` is in the range `[34,2160]`.

Data Types: `double`

`LosslessCompression` — Lossless compression

`true` | `false`

Lossless compression, specified as `true` or `false`. The `LosslessCompression` property is only available for objects used for writing Motion JPEG 2000 files.

If `LosslessCompression` is `true`, then:

- The `writeVideo` function writes data so that the decompressed data is identical to the input data.
- `VideoWriter` ignores any specified value for `CompressionRatio`.

After you call `open`, you cannot change the `LosslessCompression` value.

By default, `LosslessCompression` is `false` for the `'Motion JPEG 2000'` profile and `true` for the `'Archival'` profile.

Data Types: `logical`

`MJ2BitDepth` — Bit depth for Motion JPEG 2000 files

integer in the range `[1,16]`

Bit depth for Motion JPEG 2000 files, specified as an integer in the range `[1,16]`. The bit depth is the number of least-significant bits in the input image data

`MJ2BitDepth` is available only for objects used for writing Motion JPEG 2000 files. If you do not specify a value before calling the `open` method, `VideoWriter` sets the bit depth based on the input data type. For example, if the input data to `writeVideo` is an array of `uint8` or `int8` values, then `MJ2BitDepth` is `8`.

Example: `8`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`Path` — Full path to video file

character vector

This property is read-only.

Full path to the video file, specified as a character vector.

Data Types: `char`

`Quality` — Video quality

75 (default) | integer in the range `[0,100]`

Video quality, specified as an integer in the range, `[0,100]`. Higher quality numbers result in higher video quality and larger file sizes. Lower quality numbers result in lower video quality and smaller file sizes.

`Quality` is available only for objects associated with the `MPEG-4` or `Motion JPEG AVI` profile. After you call `open`, you cannot change the `Quality` value.

Example: `50`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`VideoBitsPerPixel` — Number of bits per pixel

numeric scalar

This property is read-only.

Number of bits per pixel in each output video frame, specified as a numeric scalar.

AVI files with truecolor video, Motion JPEG AVI, and MPEG-4 files have 24 bits per pixel (8 bits for each of three color bands).

Indexed and grayscale AVI files have 8 bits per pixel.

For Motion JPEG 2000 files, the number of bits per pixel depends on the value of `MJ2BitDepth` and the number of bands of image data. For example, if the input data to `writeVideo` is a three-dimensional array of `uint16` or `int16` values, the default value of `MJ2BitDepth` is `16`, and `VideoBitsPerPixel` is `48` (three times the bit depth).

Data Types: `double`

`VideoCompressionMethod` — Type of video compression
`'None' | 'H.264' | 'Motion JPEG' | 'Motion JPEG 2000'`

This property is read-only.

Type of video compression, specified as `'None'`, `'H.264'`, `'Motion JPEG'`, or `'Motion JPEG 2000'`.

Data Types: `char`

`VideoFormat` — MATLAB representation of video format
character vector

This property is read-only.

MATLAB representation of the video format, specified as a character vector.

For file types other than Motion JPEG 2000 files, `VideoFormat` is one of the following.

Video Format	Value of `VideoFormat`
Uncompressed AVI, Motion JPEG AVI, or MPEG-4 files	`'RGB24'`
AVI files with indexed video	`'Indexed'`
AVI files with grayscale video	`'Grayscale'`

For Motion JPEG 2000 files, `VideoFormat` depends on the value of `MJ2BitDepth` and the format of the input image data to the `writeVideo` method. For example, if you do not specify the `MJ2BitDepth` property, `VideoWriter` sets the format as shown in this table.

Format of Image Data	Value of `VideoFormat`
Single-band `uint8`	`'Mono8'`
Single-band `int8`	`'Mono8 Signed'`
Single-band `uint16`	`'Mono16'`
Single-band `int16`	`'Mono16 Signed'`
Three-banded `uint8`	`'RGB24'`

Format of Image Data	Value of `VideoFormat`
Three-banded `int8`	`'RGB24 Signed'`
Three-banded `uint16`	`'RGB48'`
Three-banded `int16`	`'RGB48 Signed'`

`Width` — Width of each video frame

numeric scalar

This property is read-only.

Width of each video frame in pixels, specified as a numeric scalar. The `writeVideo` function sets values for `Height` and `Width` based on the dimensions of the first frame.

MPEG-4 files require frame dimensions that are divisible by two. If the input frame width for an MPEG-4 file is not an even number, then `VideoWriter` pads the frame with a column of black pixels along the right side. For MPEG-4 files on Windows systems, the allowed value depends on the version of Windows. For example, on Windows 10 the allowed `Width` is in the range `[34,3872]`.

Data Types: `double`

Object Functions

open	Open file for writing video data
close	Close file after writing video data
writeVideo	Write video data to file
VideoWriter.getProfiles	Profiles and file formats that VideoWriter supports

Examples

Create VideoWriter Object and Write Video

Create a `VideoWriter` object to write a Motion JPEG AVI file named `newfile.avi`.

```
v = VideoWriter('newfile.avi');
```

Open the file for writing and write a 300-by-300 matrix of data to the file.

```
open(v)
writeVideo(v,rand(300))
```

Close the file.

```
close(v)
```

Specify Profile for Uncompressed AVI and Write Video

Create an array containing data from the sample still image, `peppers.png`.

```
A = imread('peppers.png');
```

Create a `VideoWriter` object for a new uncompressed AVI file for RGB24 video.

```
v = VideoWriter('newfile.avi','Uncompressed AVI');
```

Open the file for writing.

```
open(v)
```

Write the image in `A` to the video file.

```
writeVideo(v,A)
```

Close the file.

```
close(v)
```

Create AVI File from Animation

Write a sequence of frames to a compressed AVI file named `peaks.avi`.

Prepare the new file.

```
v = VideoWriter('peaks.avi');
open(v);
```

Generate initial data and set axes and figure properties.

```
Z = peaks;
surf(Z);
axis tight manual
set(gca,'nextplot','replacechildren');
```

Create a set of frames and write each frame to the file.

```
for k = 1:20
   surf(sin(2*pi*k/20)*Z,Z)
   frame = getframe(gcf);
   writeVideo(v,frame);
end

close(v);
```

See Also

Topics

"Export to Video"

Introduced in R2010b

close

Close file after writing video data

Syntax

```
close(v)
```

Description

`close(v)` closes the video file associated with `v`. You must call `close` to ensure that all data is written to the file. The object, `v`, remains in the workspace. If you call the `open` function after closing the video file, `open` discards all existing contents of the file.

Examples

Open and Close Video File for Writing

Create a `VideoWriter` object to write a new Motion JPEG AVI file.

```
v = VideoWriter('newfile');
```

Open the file for writing.

```
open(v)
```

Write a 300-by-300 matrix of data to the file.

```
writeVideo(v,rand(300))
```

Close the file.

```
close(v)
```

Input Arguments

`v` — Input `VideoWriter` object
`VideoWriter` object

Input `VideoWriter` object. Use `VideoWriter` to create the object.

See Also

See Also

`open` | `VideoWriter` | `writeVideo`

Introduced in R2010b

VideoWriter.getProfiles

Profiles and file formats that `VideoWriter` supports

Syntax

```
profiles = VideoWriter.getProfiles()
```

Description

`profiles = VideoWriter.getProfiles()` returns an array of `audiovideo.writer.ProfileInfo` objects that indicate the types of files that `VideoWriter` can create.

Examples

Get Profile Information

View available profiles and get specific information about the `'Uncompressed AVI'` profile.

View profiles that `VideoWriter` supports.

```
profiles = VideoWriter.getProfiles()
```

```
  Summary of installed VideoWriter profiles:

          Name                                    Description
    ---------------- ---------------------------------------------------------------
    Archival         Video file compression with JPEG 2000 codec with lossless mode ena
    Grayscale AVI    An AVI file with Grayscale Video Data
    Indexed AVI      An AVI file with Indexed Video Data
    MPEG-4           A MPEG-4 file with H.264 Compression
    Motion JPEG 2000 Video file compression with JPEG 2000 codec.
    Motion JPEG AVI  An AVI file with Motion JPEG compression
    Uncompressed AVI An AVI file with uncompressed RGB24 video data
```

Find the index number for the `'Uncompressed AVI'` profile.

```
uncompAVI = find(ismember({profiles.Name},'Uncompressed AVI'));
```

View the properties of the `'Uncompressed AVI'` profile.

```
profiles(uncompAVI)
```

```
  audiovideo.writer.ProfileInfo

    ProfileInfo Properties:

       Name:                      'Uncompressed AVI'
       Description:               'An AVI file with uncompressed RGB24 video data'
       FileExtensions:            {'.avi'}
       ColorChannels:             3
       FrameRate:                 30
       VideoBitsPerPixel:         24
       VideoCompressionMethod:    'None'
       VideoFormat:               'RGB24'
```

Get the file extensions associated with the profile.

```
ext = profiles(uncompAVI).FileExtensions
```

```
ext = cell
    '.avi'
```

Output Arguments

`profiles` — Supported profiles and video file formats

array of `audiovideo.writer.ProfileInfo` objects

Supported profiles and video file formats, returned as an array of `audiovideo.writer.ProfileInfo` objects, which have the following read-only properties.

Property	Description
`Name`	Character vector indicating the profile name, such as `'Uncompressed AVI'`.
`Description`	Character vector indicating the description of the profile.
`FileExtensions`	Cell array of character vectors containing file extensions supported by the file format.

Property	Description
`ColorChannels`	Number of color channels in each output video frame.
`CompressionRatio`	Number greater than 1 that specifies the target ratio between the number of bytes in the input image and the number of bytes in the compressed image. Only applies to objects associated with Motion JPEG 2000 files. Default: `10`.
`FrameRate`	Rate of playback for the video in frames per second. Default: `30`.
`LosslessCompression`	Boolean value (logical `true` or `false`) that specifies whether to use reversible mode, so that the decompressed data is identical to the input data. When `true`, `VideoWriter` ignores values for `CompressionRatio`. Only applies to objects associated with Motion JPEG 2000 files.
`MJ2BitDepth`	Number of least-significant bits in the input image data, from 1 to 16. Applied only to objects associated with Motion JPEG 2000 files.
`Quality`	Number from 0 through 100. Higher values correspond to higher quality video and larger files. Only applies to objects associated with the `MPEG-4` or `Motion JPEG AVI` profile. Default: `75`.
`VideoBitsPerPixel`	Number of bits per pixel in each output video frame.
`VideoCompressionMethod`	Character vector indicating the type of video compression, such as `'None'` or `'Motion JPEG'`.
`VideoFormat`	Character vector indicating the MATLAB representation of the video format, such as `'RGB24'`.

See Also

See Also

`VideoWriter`

Introduced in R2010b

open

Open file for writing video data

Syntax

```
open(v)
```

Description

`open(v)` opens the file associated with `v` for writing. When you open the file, all properties of the object become read only. `open` discards all existing contents of the file.

Examples

Open and Close Video File for Writing

Create a `VideoWriter` object to write a new Motion JPEG AVI file.

```
v = VideoWriter('newfile');
```

Open the file for writing.

```
open(v)
```

Write a 300-by-300 matrix of data to the file.

```
writeVideo(v,rand(300))
```

Close the file.

```
close(v)
```

Input Arguments

`v` — Input `VideoWriter` object
`VideoWriter` object

Input `VideoWriter` object. Use `VideoWriter` to create the object.

See Also

See Also

`close` | `VideoWriter` | `writeVideo`

Introduced in R2010b

writeVideo

Write video data to file

Syntax

```
writeVideo(v,img)
writeVideo(v,frame)
```

Description

`writeVideo(v,img)` writes data from an array to the video file associated with `v`.

You must call `open(v)` before calling `writeVideo`.

`writeVideo(v,frame)` writes one or more movie frames typically returned by the `getframe` function.

Examples

Write Image to Motion JPEG 2000 File

Write an RGB image to a Motion JPEG 2000 file with lossless compression.

Create an array containing data from the sample still image, `peppers.png`.

```
A = imread('peppers.png');
```

Create a `VideoWriter` object for a new video file. Use the `'Archival'` profile to specify a Motion JPEG 2000 file with lossless compression.

```
v = VideoWriter('myFile','Archival');
```

Verify the type of video compression for the new file.

```
v.VideoCompressionMethod
```

```
ans =
'Motion JPEG 2000'
```

Open the video file for writing. Then, write the image data in A to the file.

```
open(v)
writeVideo(v,A)
```

Close the video file.

```
close(v)
```

Write Indexed Image to AVI File

Read image and colormap data from the sample indexed image file, `corn.tif`.

```
[X,map] = imread('corn.tif');
```

Create a `VideoWriter` object for a new indexed AVI file.

```
v = VideoWriter('myIndexed.avi','Indexed AVI');
```

Assign the colormap data to the `Colormap` property of `v`.

```
v.Colormap = map;
```

Open the file for writing. After you open the file, you cannot change the properties of `v`.

```
open(v)
```

Write the image data in `X` to the video file. Then, close the file.

```
writeVideo(v,X)
close(v)
```

Convert MPEG-4 to AVI File

Convert the example file, `xylophone.mp4`, to an uncompressed AVI file.

Create objects to read and write the video, and open the AVI file for writing.

```
reader = VideoReader('xylophone.mp4');
writer = VideoWriter('transcoded_xylophone.avi', ...
                        'Uncompressed AVI');

writer.FrameRate = reader.FrameRate;
```

```
open(writer);
```

Read and write each frame.

```
while hasFrame(reader)
   img = readFrame(reader);
   writeVideo(writer,img);
end

close(writer);
```

Create AVI File from Animation

Write a sequence of frames to a compressed AVI file named `peaks.avi`.

Prepare the new file.

```
v = VideoWriter('peaks.avi');
open(v);
```

Generate initial data and set axes and figure properties.

```
Z = peaks;
surf(Z);
axis tight manual
set(gca,'nextplot','replacechildren');
```

Create a set of frames and write each frame to the file.

```
for k = 1:20
   surf(sin(2*pi*k/20)*Z,Z)
   frame = getframe(gcf);
   writeVideo(v,frame);
end

close(v);
```

Input Arguments

v — Input `VideoWriter` object

`VideoWriter` object

Input `VideoWriter` object. Use `VideoWriter` to create the object.

`img` — Values representing grayscale or RGB color images

2-D array | 3-D array | 4-D array

Values representing grayscale or RGB color images, specified as a 2-D, 3-D, or 4-D array:

- For a single grayscale, monochrome, or indexed image, `img` must be two dimensional: height-by-width
- For a single truecolor (RGB) image, `img` is three dimensional: height-by-width-by-3.
- For a sequence of grayscale images, `img` is four dimensional:. height-by-width-by-1-by-frames. The height and width must be consistent for all frames within a file.
- For a sequence of RGB images, `img` is four dimensional: height-by-width-by-3-by-frames. The height and width must be consistent for all frames within a file.

When creating AVI or MPEG-4 files:

- `img` is an array of `single`, `double`, or `uint8` values representing one or more grayscale or RGB color images, which `writeVideo` writes as one or more RGB video frames.
- Data of type `single` or `double` must be in the range `[0,1]`, except when writing indexed AVI files.

When creating Motion JPEG 2000 files:

- `img` is an array of `uint8`, `int8`, `uint16`, or `int16` values representing one or more monochrome or RGB color images.

Data Types: `single` | `double` | `int8` | `int16` | `uint8` | `uint16`

`frame` — Frame data

1-by-1 structure array | 1-by-`F` array of structures

Frame data, specified as a 1-by-1 structure array representing a single frame, or a 1-by-`F` array of structures representing multiple frames. Each frame contains two fields: `cdata` and `colormap`. The `frame` array is typically returned by the `getframe` function.

If `colormap` is not empty, then each element of `cdata` should be a 2-D (height-by-width) array. The height and width must be consistent for all frames within a file.

`colormap` can contain a maximum of 256 entries. Each element of `colormap` must be in the range `[0,1]`.

When you create a `VideoWriter` object. the `profile` input and the size of `cdata` determine how `writeVideo` uses `frame`.

`profile` of `VideoWriter` object	Size of each element of `cdata`	Behavior of `writeVideo`
`'Indexed AVI'`	2-D (height-by-width)	Use frame as provided.
`'Grayscale AVI'`	2-D (height-by-width)	Use frame as provided. `colormap` should be empty.
All other profiles	2-D (height-by-width)	Construct RGB image frames using the `colormap` field
	3-D (height-by-width-by-3)	Ignore the `colormap` field. Construct RGB image frames using the `cdata` field

Data Types: `struct`

See Also

See Also

`close` | `getframe` | `open` | `VideoWriter`

Topics

"Image Types"

Introduced in R2010b

view

Viewpoint specification

Syntax

```
view(az,el)
view([az,el])
view([x,y,z])
view(2)
view(3)
view(ax,...)
[az,el] = view
```

Description

The position of the viewer (the viewpoint) determines the orientation of the axes. You specify the viewpoint in terms of azimuth and elevation, or by a point in three-dimensional space.

`view(az,el)` and `view([az,el])` set the viewing angle for a three-dimensional plot. The azimuth, `az`, is the horizontal rotation about the *z*-axis as measured in degrees from the negative *y*-axis. Positive values indicate counterclockwise rotation of the viewpoint. `el` is the vertical elevation of the viewpoint in degrees. Positive values of elevation correspond to moving above the object; negative values correspond to moving below the object.

`view([x,y,z])` sets the view direction to the Cartesian coordinates `x`, `y`, and `z`. The magnitude of `(x,y,z)` is ignored.

`view(2)` sets the default two-dimensional view, `az = 0`, `el = 90`.

`view(3)` sets the default three-dimensional view, `az = –37.5`, `el = 30`.

`view(ax,...)` uses axes `ax` instead of the current axes.

`[az,el] = view` returns the current azimuth and elevation.

Examples

View the object from directly overhead.

```
az = 0;
el = 90;
view(az, el);
```

Set the view along the *y*-axis, with the *x*-axis extending horizontally and the *z*-axis extending vertically in the figure.

```
view([0 0]);
```

Rotate the view about the *z*-axis by 180°.

```
az = 180;
el = 90;
view(az, el);
```

Tips

Azimuth is a polar angle in the *x*-*y* plane, with positive angles indicating counterclockwise rotation of the viewpoint. Elevation is the angle above (positive angle) or below (negative angle) the *x*-*y* plane.

This diagram illustrates the coordinate system. The arrows indicate positive directions.

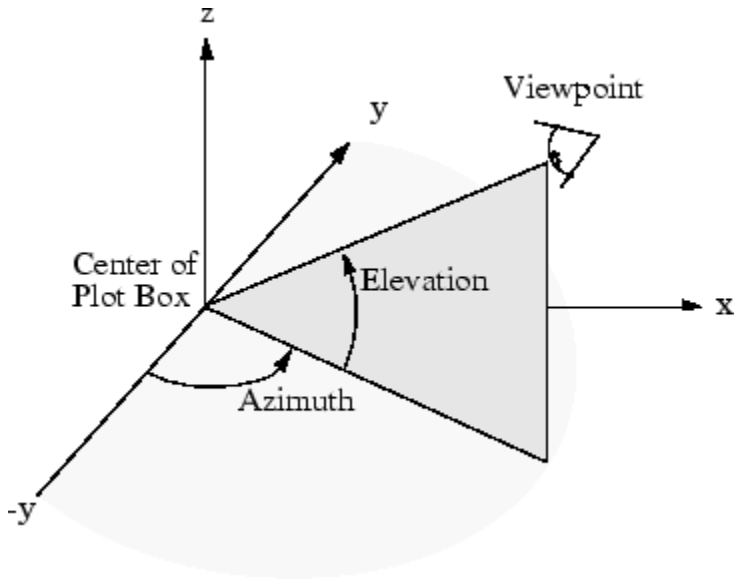

For more information, see CameraPosition, CameraTarget, CameraViewAngle, and Projection.

See Also

`hgtransform` | `rotate3d`

Topics

"View Overview"

Introduced before R2006a

viewmtx

View transformation matrices

Syntax

```
viewmtx
T = viewmtx(az,el)
T = viewmtx(az,el,phi)
T = viewmtx(az,el,phi,xc)
```

Description

`viewmtx` computes a 4-by-4 orthographic or perspective transformation matrix that projects four-dimensional homogeneous vectors onto a two-dimensional view surface (e.g., your computer screen).

`T = viewmtx(az,el)` returns an *orthographic* transformation matrix corresponding to azimuth `az` and elevation `el`. `az` is the azimuth (i.e., horizontal rotation) of the viewpoint in degrees. `el` is the elevation of the viewpoint in degrees.

`T = viewmtx(az,el,phi)` returns a *perspective* transformation matrix. `phi` is the perspective viewing angle in degrees. `phi` is the subtended view angle of the normalized plot cube (in degrees) and controls the amount of perspective distortion.

Phi	Description
0 degrees	Orthographic projection
10 degrees	Similar to telephoto lens
25 degrees	Similar to normal lens
60 degrees	Similar to wide-angle lens

`T = viewmtx(az,el,phi,xc)` returns the perspective transformation matrix using `xc` as the target point within the normalized plot cube (i.e., the camera is looking at the point `xc`). `xc` is the target point that is the center of the view. You specify the point as a

three-element vector, `xc = [xc,yc,zc]`, in the interval [0,1]. The default value is `xc = [0,0,0]`.

A four-dimensional homogenous vector is formed by appending a 1 to the corresponding three-dimensional vector. For example, `[x,y,z,1]` is the four-dimensional vector corresponding to the three-dimensional point `[x,y,z]`.

Examples

Compute Transformation Matrices

Determine the projected two-dimensional vector corresponding to the three-dimensional point (0.5,0.0,-3.0) using the default view direction. Note that the point is a column vector.

```
A = viewmtx(-37.5,30);
x4d = [.5 0 -3 1]';
x2d = A*x4d;
x2d = x2d(1:2)
```

```
x2d =

    0.3967
   -2.4459
```

Create vectors that trace the edges of a unit cube.

```
x = [0  1  1  0  0  0  1  1  0  0  1  1  1  1  0  0];
y = [0  0  1  1  0  0  0  1  1  0  0  0  1  1  1  1];
z = [0  0  0  0  0  1  1  1  1  1  1  0  0  1  1  0];
```

Transform the points in these vectors to the screen, then plot the object.

```
A = viewmtx(-37.5,30);
[m,n] = size(x);
x4d = [x(:),y(:),z(:),ones(m*n,1)]';
x2d = A*x4d;
x2 = zeros(m,n); y2 = zeros(m,n);
x2(:) = x2d(1,:);
```

```
y2(:) = x2d(2,:);
plot(x2,y2)
```

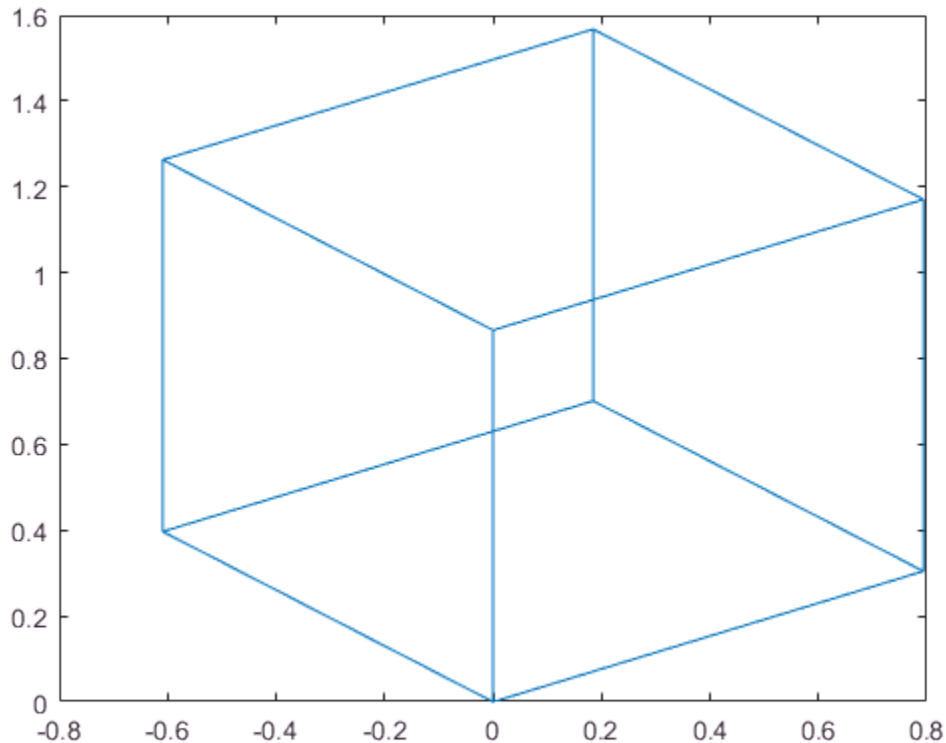

Use a perspective transformation with a 25 degree viewing angle.

```
A = viewmtx(-37.5,30,25);
x4d = [.5 0 -3 1]';
x2d = A*x4d;
x2d = x2d(1:2)/x2d(4)

x2d =

    0.1777
   -1.8858
```

Transform the cube vectors to the screen and plot the object.

```
A = viewmtx(-37.5,30,25);
[m,n] = size(x);
x4d = [x(:),y(:),z(:),ones(m*n,1)]';
x2d = A*x4d;
x2 = zeros(m,n); y2 = zeros(m,n);
x2(:) = x2d(1,:)./x2d(4,:);
y2(:) = x2d(2,:)./x2d(4,:);
plot(x2,y2)
```

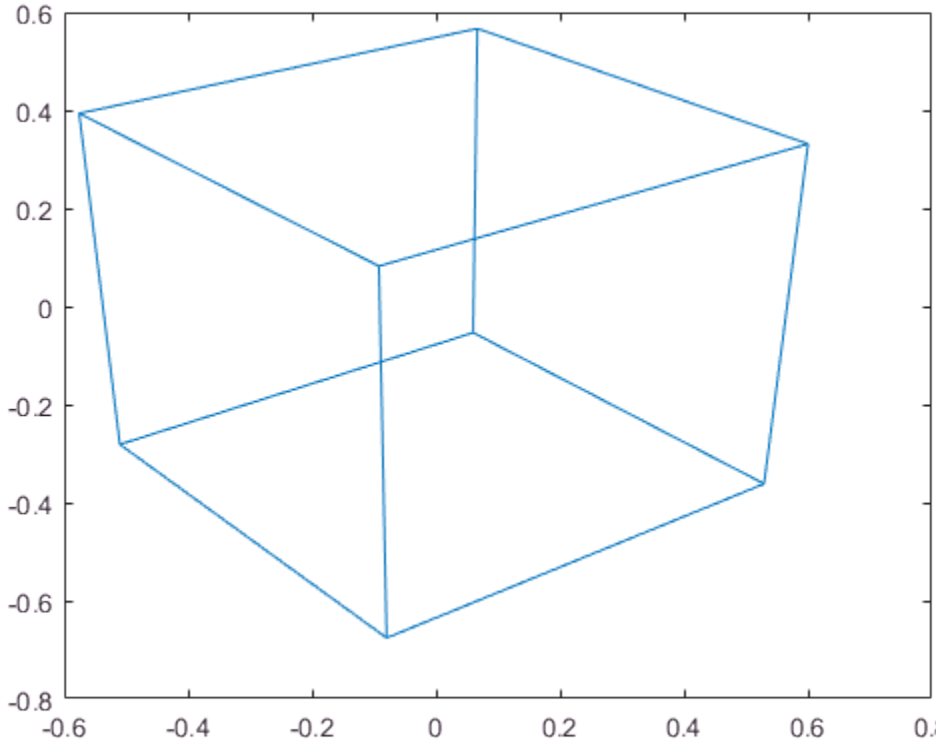

Tutorials

- "Camera Graphics Terminology"

See Also

`view` | `hgtransform`

Topics

"Camera Graphics Terminology"

Introduced before R2006a

visdiff

Compare two text files, MAT-Files, binary files, Zip files, or folders

Syntax

```
visdiff('filename1', 'filename2')
visdiff('filename1', 'filename2', 'type')
```

Description

`visdiff('filename1', 'filename2')` opens the Comparison Tool and presents the differences between the two files or folders. Either ensure that the two files or folders appear on the MATLAB path, or provide the full path for each file or folder. You can compare files or any combination of folders, zip files, Simulink manifests or models.

If you have Simulink Report Generator™ software, you can select a pair of Simulink models to compare XML text files generated from them. For information, see "Model Comparison" (Simulink Report Generator).

`visdiff('filename1', 'filename2', 'type')` opens the Comparison Tool and presents the differences between the two files using the specified comparison type. *`type`* can be `'text'` or `'binary'`. If you do not specify `type`, `visdiff` creates the default comparison type for your selected files. The *`type`* option does not apply when comparing folders.

If there are multiple comparison types available for your selections (e.g., text, binary, file list, or XML comparison), you can create a new comparison and choose a different comparison type.

1. In the Comparison Tool, click the New comparison button.

   The dialog box Select Files or Folders for Comparison opens and shows your previous comparison selections in the drop-down lists.

2. Change the comparison type and click **Compare**.

Examples

Specifying Files or Folders to Compare

The `visdiff` function accepts fully qualified file names, relative file names, or names of files on the MATLAB path.

If the files you want to compare appear on the MATLAB path or in the current folder, you can specify the file names without the full path, for example:

```
visdiff('lengthofline.m','lengthofline2.m')
```
or

```
visdiff('lengthofline','lengthofline2')
```

If the files you want to compare are not on the path, either specify the full path to each file, or add the folders to the path.

For example, to specify the fully qualified file names to compare two example files:

```
visdiff(fullfile(matlabroot,'toolbox','matlab','demos','gatlin.mat'), ...
fullfile(matlabroot,'toolbox','matlab','demos','gatlin2.mat'))
```

Specify the full path to files as follows:

```
visdiff('C:\Work\comp\lengthofline.m', 'C:\Work\comp\lengthofline2.m')
```

You can specify paths to files relative to the current folder. For the preceding example, if the current folder is `Work`, then the relative paths are:

```
visdiff('comp\lengthofline.m', 'comp\lengthofline2.m')
```

Compare Two Text Files

To view a comparison of the two example files, `lengthofline.m` and `lengthofline2.m`:

```
visdiff(fullfile(matlabroot,'help','techdoc','matlab_env',...
'examples','lengthofline.m'), fullfile(matlabroot,'help',...
'techdoc','matlab_env','examples','lengthofline2.m'))
```

For information about using the report features, see “Comparing Text and Live Scripts”.

Note: If the text files you compare are XML files, you see different results if you have MATLAB Report Generator installed. For details, see "Comparing Files and Folders".

Compare Two MAT-Files

To compare two example files:

```
visdiff(fullfile(matlabroot,'toolbox','matlab','demos','gatlin.mat'), ...
fullfile(matlabroot,'toolbox','matlab','demos','gatlin2.mat'))
```

For information about the report features, see "Comparing MAT-Files".

Compare Two Binary Files

The following example code adds a folder containing two MEX-files to the MATLAB path, and then compares the files:

```
addpath([matlabroot '\extern\examples\shrlib'])
visdiff('shrlibsample.mexw32', 'yprime.mexw32')
```

The Comparison Tool opens and indicates that the files are different, but does not provide details about the differences.

For more information on binary comparisons, see "Comparing Binary Files".

Compare Two Folders or Zip Files

You can perform file list comparisons for any combinations of folders and zip files. To view an example folder comparison and instructions for using the report features, see "Comparing Folders and Zip Files".

Compare Files and Specify Type

To compare two example text files and specify comparison type as binary:

```
visdiff(fullfile(matlabroot,'help','techdoc','matlab_env',...
'examples','lengthofline.m'), fullfile(matlabroot,'help',...
'techdoc','matlab_env','examples','lengthofline2.m'), 'binary')
```

If you do not specify type, `visdiff` creates the default comparison type for your selected files, in this case, text comparison. By changing to the binary comparison type you could examine differences such as end-of-line characters.

Similarly, when you compare XML files without specifying type, you get a hierarchical XML comparison report. If instead you want a text or binary comparison, you can specify "text" or "binary" comparison types to see more details. When you compare zip files, the default comparison type is a file list comparison, and you might want to specify a binary comparison instead.

Alternatives

As an alternative to the `visdiff` function, compare files and folders using any of these interactive methods:

- From the Current Folder browser:
  - Select a file or folder. Right-click the file or folder, and select **Compare Against**.
  - For two files or subfolders in the same folder, select the files or folders. Then, right-click, and select **Compare Selected Files/Folders**.
- From the MATLAB desktop, on the **Home** tab, in the **File** section, click **Compare** and then select the files or folders to compare.
- If you have a file open in the Editor, on the **Editor** or **Live Editor** tab, in the **File** section, click **Compare**. Alternatively, under **Compare**, you can choose a file to compare against, or compare with the autosave version or the version on disk. See "Comparing Files with Autosave Version or Version on Disk".

See Also

Topics

"Comparing Files and Folders"

External Websites

"Model Comparison" (Simulink Report Generator)

Introduced in R2008b

volumebounds

Coordinate and color limits for volume data

Syntax

```
lims = volumebounds(X,Y,Z,V)
lims = volumebounds(X,Y,Z,U,V,W)
lims = volumebounds(V)
lims = volumebounds(U,V,W)
```

Description

`lims = volumebounds(X,Y,Z,V)` returns the x, y, z, and color limits of the current axes for scalar volume data. `lims` is returned as a vector:

```
[xmin xmax ymin ymax zmin zmax cmin cmax]
```

You can pass this vector to the `axis` command.

`lims = volumebounds(X,Y,Z,U,V,W)` returns the x, y, and z limits of the current axes for vector volume data. `lims` is returned as a vector:

```
[xmin xmax ymin ymax zmin zmax]
```

`lims = volumebounds(V)` and `lims = volumebounds(U,V,W)` assumes `X`, `Y`, and `Z` are determined by the expression

```
[X Y Z] = meshgrid(1:n,1:m,1:p)
```

where `[m n p] = size(V)`.

Examples

Set Axes and Color Limits for Isosurface

Use `volumebounds` to set the axes and color limits for an isosurface returned by the `flow` function.

```
[x,y,z,v] = flow;
p = patch(isosurface(x,y,z,v,-3));
isonormals(x,y,z,v,p);
daspect([1 1 1]);
isocolors(x,y,z,fliplr(v),p);
shading interp
axis(volumebounds(x,y,z,v));
```

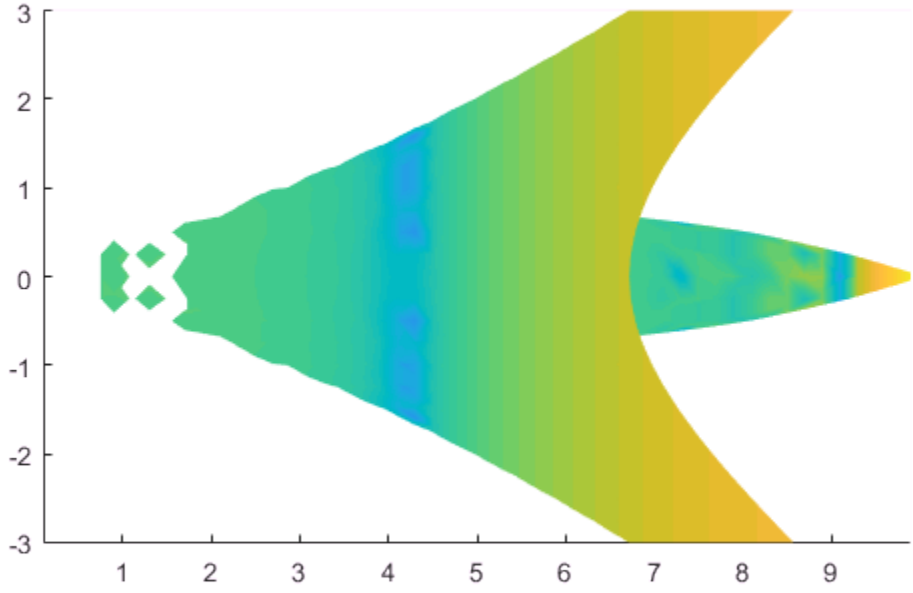

See Also

isosurface | streamslice

Introduced before R2006a

voronoi

Voronoi diagram

Note: Qhull-specific options are no longer supported. Remove the `OPTIONS` argument from all instances in your code that pass it to `voronoi`.

Note: The behavior of `h = voronoi(...)` has changed. The new behavior returns a vector of two chart line handles; one representing the points and the other representing the Voronoi edges.

Syntax

```
voronoi(x,y)
voronoi(x,y,TRI)
voronoi(dt)
voronoi(AX,...)
voronoi(...,'LineSpec')
h = voronoi(...)
[vx,vy] = voronoi(...)
```

Description

`voronoi(x,y)` plots the bounded cells of the Voronoi diagram for the points `x`,`y`. Lines-to-infinity are approximated with an arbitrarily distant endpoint.

`voronoi(x,y,TRI)` uses the triangulation `TRI` instead of computing internally.

`voronoi(dt)` uses the Delaunay triangulation `dt` instead of computing it.

`voronoi(AX,...)` plots into `AX` instead of `gca`.

`voronoi(...,'LineSpec')` plots the diagram with color and line style specified.

`h = voronoi(...)` returns `h`, which is a vector of two chart line handles. One represents the points and the other represents the Voronoi edges.

`[vx,vy] = voronoi(...)` returns the finite vertices of the Voronoi edges in `vx` and `vy`.

Note For the topology of the Voronoi diagram, i.e., the vertices for each Voronoi cell, use `voronoin`.

```
[v,c] = voronoin([x(:) y(:)])
```

Visualization

Use one of these methods to plot a Voronoi diagram:

- If you provide no output argument, `voronoi` plots the diagram.
- To gain more control over color, line style, and other figure properties, use the syntax `[vx,vy] = voronoi(...)`. This syntax returns the vertices of the finite Voronoi edges, which you can then plot with the `plot` function.
- To fill the cells with color, use `voronoin` with `n = 2` to get the indices of each cell, and then use `patch` and other plot functions to generate the figure. Note that `patch` does not fill unbounded cells with color.

Examples

Voronoi Diagram Based on Points

This code uses the `voronoi` function to plot the Voronoi diagram for 10 randomly generated points.

```
x = gallery('uniformdata',[1 10],0);
y = gallery('uniformdata',[1 10],1);
voronoi(x,y)
```

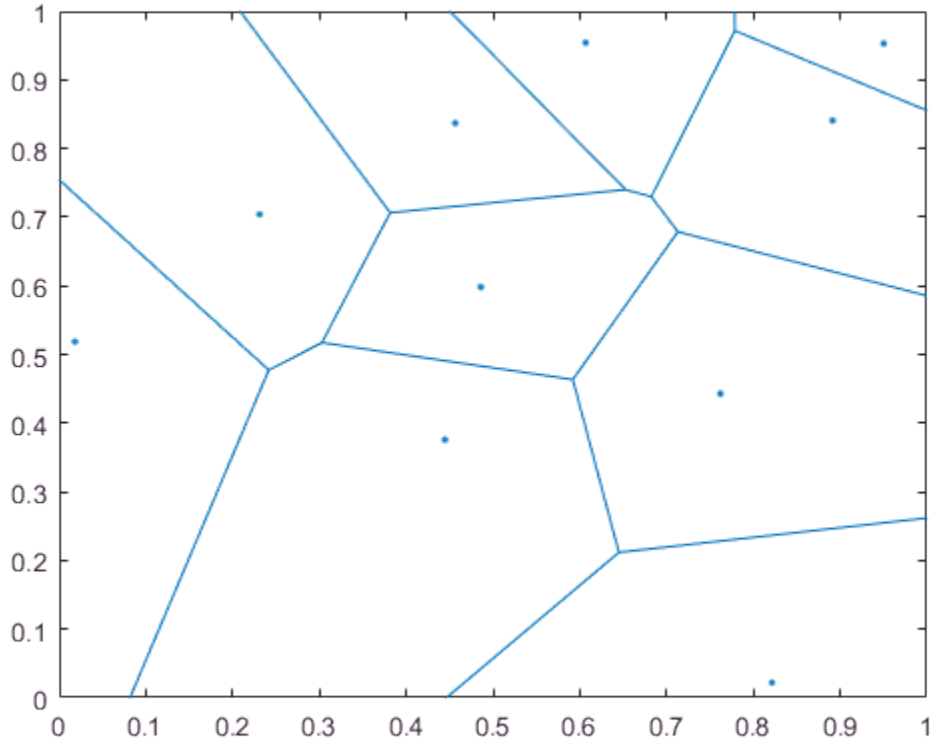

Voronoi Diagram Based on Vertices of Voronoi Edges

This code uses the vertices of the finite Voronoi edges to plot the Voronoi diagram for the same 10 points used in the previous example.

```
x = gallery('uniformdata',[1 10],0);
y = gallery('uniformdata',[1 10],1);
[vx,vy] = voronoi(x,y);
plot(x,y,'r+',vx,vy,'b-')
axis equal
```

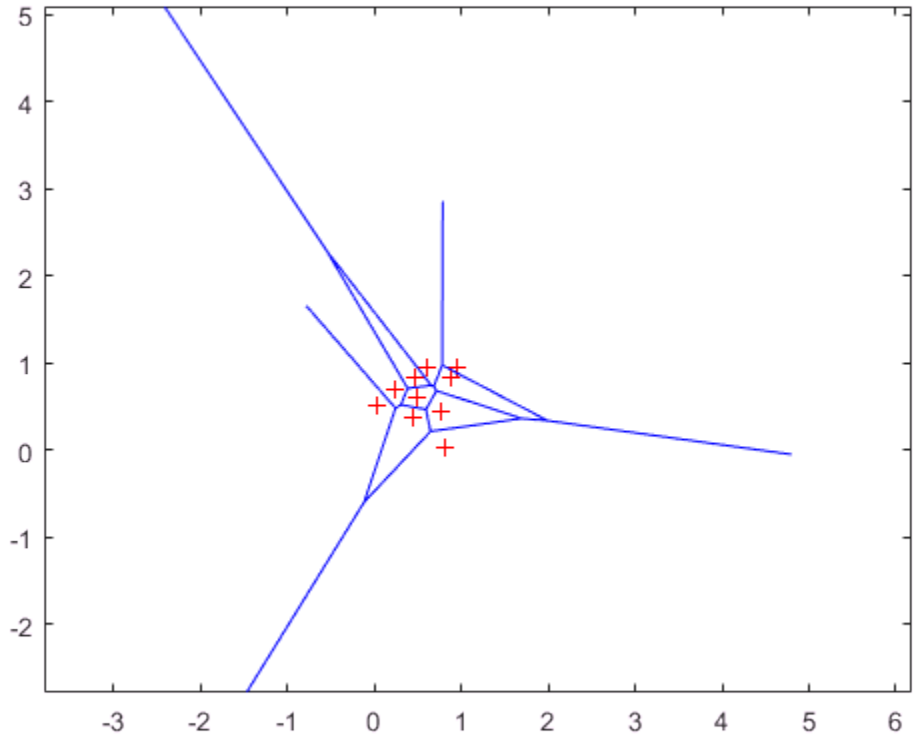

Note that you can add the following code to get the figure shown in the previous example.

```
xlim([min(x) max(x)])
ylim([min(y) max(y)])
```

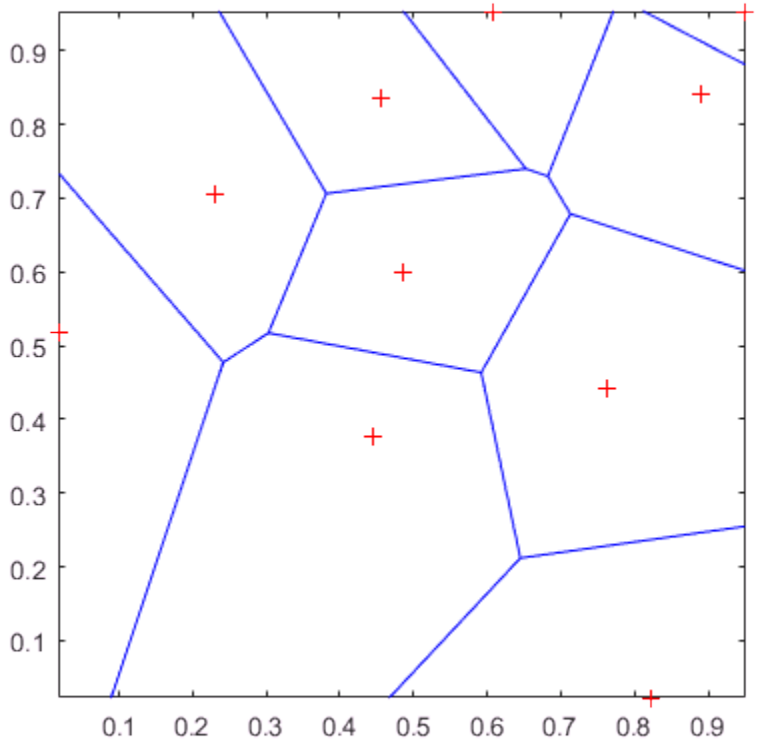

Voronoi Diagram with Color

This code uses `voronoin` and `patch` to fill the bounded cells of the same Voronoi diagram with color.

```
x = gallery('uniformdata',[10 2],5);
[v,c] = voronoin(x);
for i = 1:length(c)
if all(c{i}~=1)   % If at least one of the indices is 1,
                  % then it is an open region and we can't
                  % patch that.
patch(v(c{i},1),v(c{i},2),i); % use color i.
end
```

```
end
```

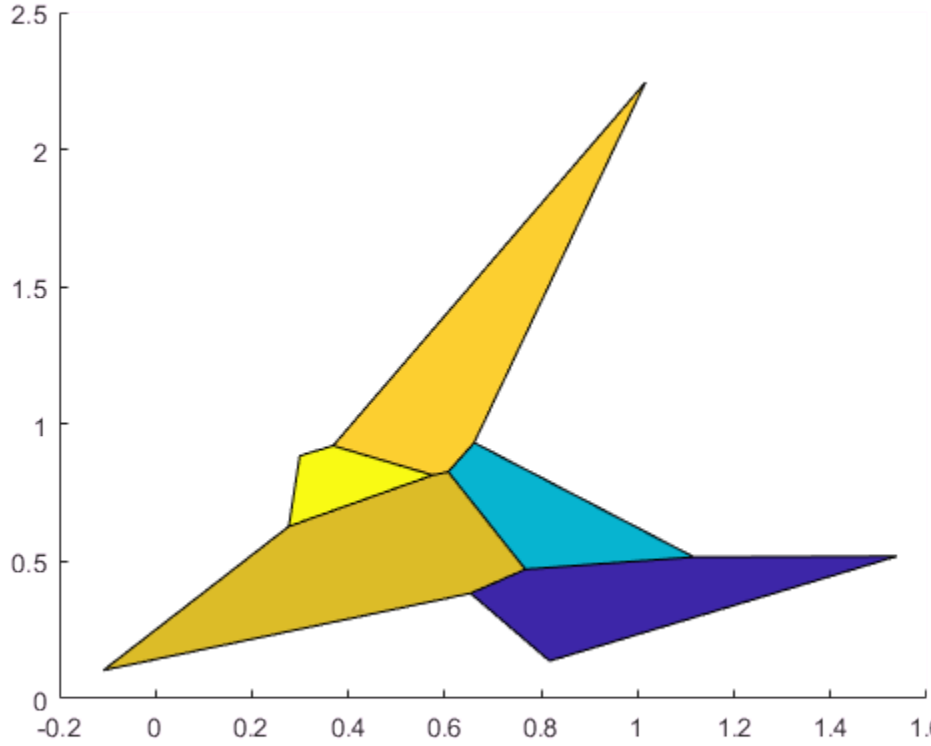

Definitions

Voronoi Polygon

Consider a set of coplanar points *P*. For each point P_x in the set *P*, you can draw a boundary enclosing all the intermediate points lying closer to P_x than to other points in the set *P*. Such a boundary is called a *Voronoi polygon*.

Voronoi Diagram

The set of all Voronoi polygons for a given point set is called a *Voronoi diagram*.

See Also

delaunayTriangulation | `convhull` | `delaunay` | `LineSpec` | `plot` | `voronoin`

Introduced before R2006a

voronoiDiagram

Class: DelaunayTri

(Not recommended) Voronoi diagram

Note: `voronoiDiagram(DelaunayTri)` is not recommended. Use voronoiDiagram(delaunayTriangulation) instead.

`DelaunayTri` is not recommended. Use delaunayTriangulation instead.

Syntax

```
[V, R] = voronoiDiagram(DT)
```

Description

`[V, R] = voronoiDiagram(DT)` returns the vertices `V` and regions `R` of the Voronoi diagram of the points `DT.X`. The region `R{i}` is a cell array of indices into `V` that represents the Voronoi vertices bounding the region. The Voronoi region associated with the `i`'th point, `DT.X(i)` is `R{i}`. For 2-D, vertices in `R{i}` are listed in adjacent order, i.e. connecting them will generate a closed polygon (Voronoi diagram). For 3-D the vertices in `R{i}` are listed in ascending order.

The Voronoi regions associated with points that lie on the convex hull of `DT.X` are unbounded. Bounding edges of these regions radiate to infinity. The vertex at infinity is represented by the first vertex in `V`.

Input Arguments

`DT`	Delaunay triangulation.

Output Arguments

V	numv-by-ndim matrix representing the coordinates of the Voronoi vertices, where numv is the number of vertices and ndim is the dimension of the space where the points reside.
R	Vector cell array of length(DR.X), representing the Voronoi cell associated with each point.

Examples

Compute the Voronoi Diagram of a set of points:

```
X = [ 0.5    0
      0      0.5
     -0.5   -0.5
     -0.2   -0.1
     -0.1    0.1
      0.1   -0.1
      0.1    0.1 ]
dt = DelaunayTri(X)
[V,R] = voronoiDiagram(dt)
```

Definitions

Voronoi Diagram

The *Voronoi diagram* of a discrete set of points X decomposes the space around each point X(i) into a region of influence R{i}. Locations within the region are closer to point i than any other point. The region of influence is called the Voronoi region. The collection of all the Voronoi regions is the Voronoi diagram.

Convex Hull

The *convex hull* of a set of points X is the smallest convex polygon (or polyhedron in higher dimensions) containing all of the points of X.

See Also

`voronoi` | delaunayTriangulation | `voronoin` | triangulation

voronoin

N-D Voronoi diagram

Syntax

```
[V,C] = voronoin(X)
[V,C] = voronoin(X,options)
```

Description

`[V,C] = voronoin(X)` returns Voronoi vertices `V` and the Voronoi cells `C` of the Voronoi diagram of `X`. `V` is a `numv`-by-`n` array of the `numv` Voronoi vertices in n-dimensional space, each row corresponds to a Voronoi vertex. `C` is a vector cell array where each element contains the indices into `V` of the vertices of the corresponding Voronoi cell. `X` is an `m`-by-`n` array, representing `m` n-dimensional points, where `n > 1` and `m >= n+1`.

The first row of `V` is a point at infinity. If any index in a cell of the cell array is `1`, then the corresponding Voronoi cell contains the first point in `V`, a point at infinity. This means the Voronoi cell is unbounded.

`voronoin` uses Qhull.

`[V,C] = voronoin(X,options)` specifies a cell array of Qhull options. The default options are:

- `{'Qbb'}` for 2- and 3-dimensional input
- `{'Qbb','Qx'}` for 4 and higher-dimensional input

If `options` is `[]`, the default options are used. If `code` is `{''}`, no options are used, not even the default. For more information on Qhull and its options, see http://www.qhull.org.

Visualization

You can plot individual bounded cells of an n-dimensional Voronoi diagram. To do this, use `convhulln` to compute the vertices of the facets that make up the Voronoi cell. Then use `patch` and other plot functions to generate the figure.

Examples

Voronoi Diagrams

Compute Voronoi vertices and diagram cells.

Define a 2-D array of points and compute the vertices and diagram cells.

```
X = [0.5 0; 0 0.5; -0.5 -0.5; -0.2 -0.1; -0.1 0.1; 0.1 -0.1; 0.1 0.1]
```

```
X =

    0.5000         0
         0    0.5000
   -0.5000   -0.5000
   -0.2000   -0.1000
   -0.1000    0.1000
    0.1000   -0.1000
    0.1000    0.1000
```

```
[V,C] = voronoin(X)
```

```
V =

       Inf       Inf
    0.7000   -1.6500
   -0.0500   -0.0500
   -0.0500   -0.5250
   -1.4500    0.6500
   -1.7500    0.7500
         0    0.2875
    0.3833    0.3833
    0.2875         0
         0         0


C = 7×1 cell array
    [1×4 double]
    [1×5 double]
    [1×4 double]
    [1×4 double]
    [1×4 double]
    [1×5 double]
```

```
    [1×4 double]
```

Use a for loop to display the contents of the cell array C.

```
for i = 1:length(C)
    disp(C{i});
end
```

```
     9     2     1     8

     8     1     6     5     7

     6     1     2     4

     6     4     3     5

    10     3     5     7

    10     3     4     2     9

    10     7     8     9
```

Convex Hull Option

Compute the Voronoi vertices and diagram cells of a 2-D set of points by specifying the convex hull parameters. The first row of C contains a point at infinity.

```
X = [-1 -1; 1 -1; 1 1; -1 1];
[V,C] = voronoin(X,{'Qbb','Qz'})
```

```
V =

   Inf   Inf
     0     0


C = 4×1 cell array
    [1×2 double]
    [1×2 double]
    [1×2 double]
    [1×2 double]
```

Algorithms

`voronoin` is based on Qhull [1]. For information about Qhull, see http://www.qhull.org/.

References

[1] Barber, C. B., D.P. Dobkin, and H.T. Huhdanpaa, "The Quickhull Algorithm for Convex Hulls," *ACM Transactions on Mathematical Software*, Vol. 22, No. 4, Dec. 1996, p. 469-483.

See Also

delaunayTriangulation | `convhull` | `convhulln` | `delaunay` | `delaunayn` | `voronoi`

Introduced before R2006a

waitbar

Open or update wait bar dialog box

Syntax

```
h = waitbar(x,'message')
waitbar(x,'message','CreateCancelBtn','button_callback')
waitbar(x,'message',property_name,property_value,...)
waitbar(x)
waitbar(x,h)
waitbar(x,h,'updated message')
```

Description

A wait bar is a figure that displays what percentage of a calculation is complete as the calculation proceeds by progressively filling a bar with color from left to right.

`h = waitbar(x,'message')` displays a wait bar of fractional length `x`. The wait bar figure displays until the code that controls it closes it or the user clicks its **Close Window** button. Its (figure) handle is returned in `h`. The argument `x` must be between `0` and `1`.

Note Wait bars are not modal figures (their `WindowStyle` is `'normal'`). They often appear to be modal because the computational loops within which they are called prevent interaction with the Command Window until they terminate. For more information, see `WindowStyle` in Figure Properties.

`waitbar(x,'message','CreateCancelBtn','button_callback')` specifying `CreateCancelBtn` adds a **Cancel** button to the figure that executes the MATLAB commands specified in `button_callback` when the user clicks the **Cancel** button or the **Close Figure** button. `waitbar` sets both the **Cancel** button callback and the figure `CloseRequestFcn` to the commands specified in `button_callback`.

`waitbar(x,'message',property_name,property_value,...)` optional arguments `property_name` and `property_value` enable you to set Figure Properties for the `waitbar`.

`waitbar(x)` subsequent calls to `waitbar(x)` extend the length of the bar to the new position `x`. Successive values of `x` normally increase. If they decrease, the wait bar runs in reverse.

`waitbar(x,h)` extends the length of the bar in the wait bar `h` to the new position `x`.

`waitbar(x,h,'updated message')` updates the message text in the `waitbar` figure, in addition to setting the fractional length to `x`.

Examples

Example 1 — Basic Wait Bar

Typically, you call `waitbar` repeatedly inside a `for` loop that performs a lengthy computation. For example:

```
h = waitbar(0,'Please wait...');
steps = 1000;
for step = 1:steps
    % computations take place here
    waitbar(step / steps)
end
close(h)
```

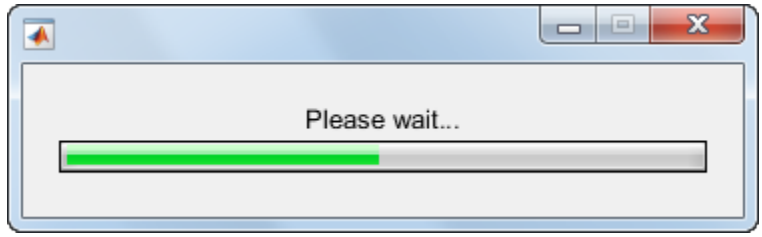

Example 2 — Wait Bar with Dynamic Text and Cancel Button

Adding a **Cancel** button allows user to abort the computation. Clicking it sets a logical flag in the figure's application data (appdata). The function tests for that value within

the main loop and exits the loop as soon as the flag has been set. The example iteratively approximates the value of *pi*. At each step, the current value displayed as text in the wait bar's message field. When the function finishes, it destroys the wait bar and returns the current estimate of π and the number of steps it ran.

Copy the following function to a code file and save it as `approxpi.m`. Execute it as follows, allowing it to run for 10,000 iterations.

```
[estimated_pi steps] = approxpi(10000)
```

You can click **Cancel** or close the window to abort the computation and return the current estimate of π.

```
function [valueofpi step] = approxpi(steps)
% Converge on pi in steps iterations, displaying waitbar.
% User can click Cancel or close button to exit the loop.
% Ten thousand steps yields error of about 0.001 percent.

h = waitbar(0,'1','Name','Approximating pi...',...
            'CreateCancelBtn',...
            'setappdata(gcbf,''canceling'',1)');
setappdata(h,'canceling',0)
% Approximate as pi^2/8 = 1 + 1/9 + 1/25 + 1/49 + ...
pisqover8 = 1;
denom = 3;
valueofpi = sqrt(8 * pisqover8);
for step = 1:steps
    % Check for Cancel button press
    if getappdata(h,'canceling')
        break
    end
    % Report current estimate in the waitbar's message field
    waitbar(step/steps,h,sprintf('%12.9f',valueofpi))
    % Update the estimate
    pisqover8 = pisqover8 + 1 / (denom * denom);
    denom = denom + 2;
    valueofpi = sqrt(8 * pisqover8);
end
delete(h)       % DELETE the waitbar; don't try to CLOSE it.
```

The function sets the figure `Name` property to describe what is being computed. In the `for` loop, calling `waitbar` sets the fractional progress indicator and displays intermediate results. The command `waitbar(i/steps,h,sprintf('%12.9f',valueofpi))` sets the wait bar's `message` variable to

the current estimate of *pi* as text. The extra computation involved makes iterations last longer than they need to, but such feedback can be helpful to users.

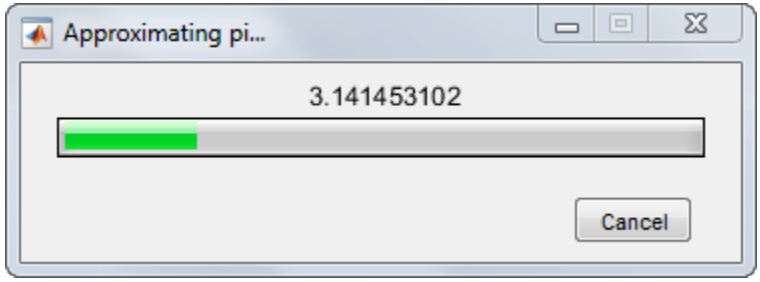

Note: You should call `delete` to remove a wait bar when you give it a `CloseRequestFcn`, as in the preceding code; calling `close` does not close it, and makes its Cancel and Close Window buttons unresponsive. This happens because the figure's `CloseRequestFcn` callback recursively calls itself. In such a situation you must forcibly remove the wait bar, for example like this:

```
set(groot,'ShowHiddenHandles','on')
delete(get(groot,'Children'))
```

However, as issuing these commands will delete all open figures—not just the wait bar—it is best never to use `close` in a `CloseRequestFcn` to close a window.

See Also

`close` | `delete` | `dialog` | `msgbox` | `getappdata` | `setappdata`

Introduced before R2006a

waitfor

Block execution and wait for condition

Syntax

```
waitfor(h)
waitfor(h,PropertyName)
waitfor(h,PropertyName,PropertyValue)
```

Description

`waitfor(h)` blocks the caller from executing statements until the MATLAB object identified by `h` closes (is deleted). When object `h` no longer exists, `waitfor` returns, enabling execution to resume. If the object does not exist, `waitfor` returns immediately without processing any events.

`waitfor(h,PropertyName)` blocks the caller from executing until the value of `PropertyName` (any property of the object `h`) changes or `h` closes (is deleted). If `PropertyName` is not a valid property for the object, MATLAB returns an error.

`waitfor(h,PropertyName,PropertyValue)` blocks the caller from executing until the value of `PropertyName` for the object `h` changes to the specific value `PropertyValue` or `h` closes (is deleted). If the value of `PropertyName` is already `PropertyValue`, `waitfor` returns immediately without processing any events.

Here are some important characteristics of the `waitfor` function:

- The `waitfor` function prevents its caller from continuing, but callbacks that respond to various user actions (for example, pressing a mouse button) can still run.
- The `waitfor` function also blocks Simulink models from executing, but callbacks do still execute.
- The `waitfor` function can block nested function calls. For example, a callback that executes while the `waitfor` function is running can call `waitfor`.
- If a callback function of a UI component is currently executing the `waitfor` function, then that callback can be interrupted regardless of that component's `Interruptible` property value.

Examples

Create a plot and pause execution of the rest of the statements until you close the figure window:

```
f = warndlg('This is a warning.', 'A Warning Dialog');
disp('This prints immediately');
drawnow     % Necessary to print the message
waitfor(f);
disp('This prints after you close the warning dialog');
```

Suspend execution until name of figure changes:

```
f = figure('Name', datestr(now));
h = uicontrol('String','Change Name',...
              'Position',[20 20 100 30],...
'Callback', 'set(gcbf, ''Name'', datestr(now))');
disp('This prints immediately');
drawnow     % Necessary to print the message
waitfor(f, 'Name');
disp('This prints after clicking the push button');
```

Display text object and wait for user to edit it:

```
figure;
textH = text(.5, .5, 'Edit me and click away');
set(textH,'Editing','on', 'BackgroundColor',[1 1 1]);
disp('This prints immediately.');
drawnow
waitfor(textH,'Editing','off');
set(textH,'BackgroundColor',[1 1 0]);
disp('This prints after text editing is complete.');
```

If you close the figure while `waitfor` is executing, an error occurs because the code attempts to access handles of objects that no longer exist. You can handle the error by enclosing code starting with the call to `waitfor` in a try/catch block, as follows:

```
figure;
textH = text(.5, .5, 'Edit me and click away');
set(textH,'Editing','on', 'BackgroundColor',[1 1 1]);
disp('This prints immediately.');
drawnow
% Use try/catch block to handle errors,
% such as deleting figure
try
```

```
    waitfor(textH,'Editing','off');
    set(textH,'BackgroundColor',[1 1 0]);
    disp('This prints after text editing is complete.');
catch ME
    disp('This prints if figure is deleted:')
    disp(ME.message)
  % You can place other code to respond to the error here
end
```

The ME variable is a MATLAB Exception object that you can use to determine the type of error that occurred. For more information, see “Respond to an Exception”.

See Also

drawnow | pause | keyboard | uiresume | uiwait | waitforbuttonpress

Introduced before R2006a

waitforbuttonpress

Wait for key press or mouse-button click

Syntax

```
k = waitforbuttonpress
```

Description

`k = waitforbuttonpress` blocks the caller's execution stream until the function detects that the user has clicked a mouse button or pressed a key while the figure window is active. The figure that is current when you call the `waitforbuttonpress` function is the only area in which users can press a key or click a mouse button to resume program execution. The return argument, `k`, can have these values:

- `0` if it detects a mouse button click
- `1` if it detects a key press

Here are some important points to consider when using the `waitforbuttonpress` function:

- If a `WindowButtonDownFcn` callback is defined for the figure, its callback is executed before `waitforbuttonpress` returns a value.
- These `Figure` properties provide additional information about the user's interaction with the window: CurrentCharacter, SelectionType, and CurrentPoint.
- Pressing keys that generate characters can cause the function to return. Pressing any of the following keys by itself does nothing: **Ctrl**, **Shift**, **Alt**, **Caps_lock**, **Num_lock**, **Scroll_lock**.
- The `waitforbuttonpress` function errors if the user closes the figure by clicking the **X** (close box) unless your code calls the `waitforbuttonpress` function within a `try/catch` block.
- The behavior of the `waitforbuttonpress` function changed in R2014b. The figure that is current when you call the `waitforbuttonpress` function is the only area in which users can press a key or click a mouse button to resume program execution.

Examples

These statements display text in the Command Window when the user either clicks a mouse button or types a key in the figure window:

```
f = figure;
w = waitforbuttonpress;
if w == 0
    disp('Button click')
else
    disp('Key press')
end
```

See Also

dragrect | ginput | rbbox | waitfor

Introduced before R2006a

warndlg

Create warning dialog box

Syntax

```
h = warndlg
h = warndlg(warningstring)
h = warndlg(warningstring,dlgname)
h = warndlg(warningstring,dlgname,createmode)
```

Description

`h = warndlg` displays a dialog box named, Warning Dialog, containing the message, "This is the default warning." The `warndlg` function returns the handle of the dialog box in `h`. The warning dialog box disappears after the user clicks **OK**.

`h = warndlg(warningstring)` displays a dialog box entitled, Warning Dialog, containing the message specified by `warningstring`. The `warningstring` argument can be a character vector or cell array of character vectors.

To use multiple lines in your warning, define `warningstring` using either of the following:

- `sprintf` with `newline` characters separating the lines

  ```
  warndlg(sprintf('Message line 1 \n Message line 2'))
  ```

- Cell arrays of character vectors

  ```
  warndlg({'Message line 1';'Message line 2'})
  ```

`h = warndlg(warningstring,dlgname)` displays a dialog box with title `dlgname`.

`h = warndlg(warningstring,dlgname,createmode)` specifies whether the warning dialog box is modal or nonmodal. Optionally, it can also specify an interpreter for `warningstring` and `dlgname`. The `createmode` argument can be a character vector or a structure.

If `createmode` is a character vector, it must be one of the values shown in the following table.

`createmode` Value	Description
`'modal'`	Replaces the warning dialog box having the specified `Title`, that was last created or clicked on, with a modal warning dialog box as specified. All other warning dialog boxes with the same title are deleted. The dialog box which is replaced can be either modal or nonmodal.
`'nonmodal'` (default)	Creates a new nonmodal warning dialog box with the specified parameters. Existing warning dialog boxes with the same title are not deleted.
`'replace'`	Replaces the warning dialog box having the specified `Title`, that was last created or clicked on, with a nonmodal warning dialog box as specified. All other warning dialog boxes with the same title are deleted. The dialog box which is replaced can be either modal or nonmodal.

Note: A modal dialog box prevents the user from interacting with other windows before responding. To block MATLAB program execution as well, use the `uiwait` function.

Modal dialogs (created using `errordlg`, `msgbox`, or `warndlg`) replace any existing dialogs created with these functions that also have the same name.

For more information about modal dialog boxes, see `WindowStyle` in Figure Properties.

If `createmode` is a structure, it can have fields `WindowStyle` and `Interpreter`. `WindowStyle` must be one of the options shown in the table above. `Interpreter` must be `'tex'` or `'none'`. The default value for `Interpreter` is `'none'`.

Examples

The statement

```
warndlg('Pressing OK will clear memory','!! Warning !!')
```

displays this dialog box:



See Also

`dialog` | `errordlg` | `helpdlg` | `inputdlg` | `listdlg` | `msgbox` | `questdlg` | `figure` | `uiwait` | `uiresume` | `warning`

Introduced before R2006a

warning

Display warning message

Syntax

```
warning(msg)
warning(msg,A1,...,An)
warning(msgID, ___ )

warning(state)
warning(state,msgID)
warning

warnStruct = warning
warning(warnStruct)

warning(state,mode)
warnStruct = warning(state,mode)
```

Description

`warning(msg)` displays the warning message and sets the warning state for the `lastwarn` function. If `msg` is an empty character vector (`''`), `warning` resets the warning state for `lastwarn`, but does not display any text.

`warning(msg,A1,...,An)` displays a message that contains formatting conversion characters, such as those used with the MATLAB `sprintf` function. Each conversion character in `msg` is converted to one of the values `A1,...,An`.

`warning(msgID, ___ )` attaches a warning identifier to the warning message. You can include any of the input arguments in the previous syntaxes. The identifier enables you to distinguish warnings and to control what happens when MATLAB encounters the warnings.

`warning(state)` enables, disables, or displays the state of all warnings.

`warning(state,msgID)` acts on the state of a specified warning.

`warning` displays the state of all of the warnings. It is equivalent to `warning('query')`.

`warnStruct = warning` returns a structure or array of structures that contains information about which warnings are enabled and disabled. `warnStruct` includes an `identifier` field with a `msgID` or `'all'`, and a `state` field that indicates the state of the corresponding warning.

`warning(warnStruct)` sets the current warning settings as indicated in the structure array, `warnStruct`.

`warning(state,mode)` controls whether MATLAB displays the stack trace or additional information about the warning.

`warnStruct = warning(state,mode)` returns a structure with an `identifier` field containing the `mode` and a `state` field containing the current state of `mode`. If you pass the output structure, `warnStruct`, into the `warning` function, you set the state of the `mode`, not which warnings are enabled or disabled.

Examples

Issue Warning Message

Generate a warning that displays a message.

```
n = 7;
if ~ischar(n)
   warning('Input must be a character vector')
end
```

```
Warning: Input must be a character vector
```

Include information about `n` in the warning message.

```
if ~ischar(n)
   warning('Input must be a character vector, not a %s',class(n))
end
```

```
Warning: Input must be a character vector, not a double
```

Attach a message identifier to the warning message.

```
if ~ischar(n)
```

```
   warning('MyComponent:incorrectType',...
       'Input must be a character vector, not a %s',class(n))
end
```

```
Warning: Input must be a character vector, not a double
```

Set and Query Warning State

Disable all warnings.

```
warning('off')
```

Query the warnings.

```
warning
```

```
All warnings have the state 'off'.
```

Enable all warnings, disable the singular matrix warning, and query all warnings.

```
warning('on')
warning('off','MATLAB:singularMatrix')
warning
```

```
The default warning state is 'on'. Warnings not set to the default are

State  Warning Identifier

    off  MATLAB:singularMatrix
```

Re-enable the singular matrix warning.

```
warning('on','MATLAB:singularMatrix')
```

Save and Restore Warning Settings

Enable all warnings, and then disable the singular matrix warning.

```
warning('on')
warning('off','MATLAB:singularMatrix')
```

Save the current warning settings.

```
s = warning
```

```
s =
```

```
2x1 struct array with fields:

    identifier
    state
```

Examine the two structures.

```
s(1)
```

```
ans =

    identifier: 'all'
         state: 'on'
```

```
s(2)
```

```
ans =

    identifier: 'MATLAB:singularMatrix'
         state: 'off'
```

All warnings are enabled except for `'MATLAB:singularMatrix'`.

Disable and query all warnings.

```
warning('off')
warning('query')
```

```
All warnings have the state 'off'.
```

Restore the saved warning state structure, and query the state.

```
warning(s)
warning('query')
```

```
The default warning state is 'on'. Warnings not set to the default are

State  Warning Identifier

    off  MATLAB:singularMatrix
```

Control Warning Verbosity

Ensure `verbose` and `backtrace` settings are the default values.

```
warning('off','verbose')
warning('on','backtrace')
```

Turn on all warnings, and remove a folder that does not exist on the MATLAB path.

```
warning('on')
rmpath('nosuchfolder')
```

```
Warning: "nosuchfolder" not found in path.
> In rmpath at 57
```

Enable verbosity to display an extended warning message.

```
warning('on','verbose')
rmpath('nosuchfolder')
```

```
Warning: "nosuchfolder" not found in path.
(Type "warning off MATLAB:rmpath:DirNotFound" to suppress this warning.)

> In rmpath at 57
```

Disable display of the stack trace.

```
warning('off','backtrace')
rmpath('nosuchfolder')
```

```
Warning: "nosuchfolder" not found in path.
(Type "warning off MATLAB:rmpath:DirNotFound" to suppress this warning.)
```

Temporarily Disable Warning

Compute a singular matrix.

```
A = eye(2);
B = [3 6; 4 8];
C = B\A;
```

```
Warning: Matrix is singular to working precision.
```

Find the warning ID, save the current warning state, and disable the specific warning

```
[msgStr,msgId] = lastwarn;
warnStruct = warning('off',msgId);
C = B\A;
```

Restore previous warning state.

```
warning(warnStruct);
C = B\A;
```

```
Warning: Matrix is singular to working precision.
```

- "Issue Warnings and Errors"
- "Suppress Warnings"
- "Restore Warnings"
- "Change How Warnings Display"

Input Arguments

`msg` — Information about cause of warning

`character vector`

Information about the cause of the warning and how you might correct it, specified as a character vector. To format the character vector, use escape sequences, such as `\t` or `\n`. You also can use any format specifiers supported by the `sprintf` function, such as `%s` or `%d`. Specify values for the conversion specifiers via the `A1,...,An` input arguments. For more information, see "Formatting Text".

Note: You must specify more than one input argument with `warning` if you want MATLAB to convert special characters (such as `\t`, `\n`, `%s`, and `%d`) in the warning message.

Example: `'Input must be a character vector.'`

`A1,...,An` — Numeric or character arrays

scalar | vector | matrix | multidimensional array

Numeric or character arrays, specified as a scalar, vector, matrix, or multidimensional array. This input argument provides the values that correspond to and replace the conversion specifiers in `msg`.

`msgID` — Identifier for warning

character vector | `'all'` | `'last'`

Identifier for the warning, specified as a character vector, `'all'`, or `'last'`. Use the warning identifier to help identify the source of the warning or to control a selected subset of the warnings in your program.

The message identifier includes a `component` and `mnemonic`. The identifier must always contain a colon and follows this simple format: `component:mnemonic`. The `component` and `mnemonic` fields must each begin with a letter. The remaining characters can be alphanumerics (A–Z, a–z, 0–9) and underscores. No whitespace characters can appear anywhere in `msgID`. For more information, see "Message Identifiers".

When you set the `state` of a warning, the `msgID` can have a value of `'all'` or `'last'`. Use `'all'` to set the state of all warnings, and use `'last'` to set the state of the last issued warning.

Example: `'MATLAB:singularMatrix'`

Example: `'MATLAB:narginchk:notEnoughInputs'`

`state` — Warning control indicator
`'on'` | `'off'` | `'query'`

Warning control indicator specified as `'on'`, `'off'`, or `'query'`. Use `'on'` or `'off'` to control whether MATLAB issues a warning. Use `'query'` to query the current state of the warning.

`warnStruct` — Warning settings
structure | array of structures

Warning settings, specified as a structure or array of structures that contains information about which warnings are enabled and which are disabled. `warnStruct` includes an `identifier` field with a `msgID` or `'all'`, and `state` field indicating the state of the corresponding warning.

`mode` — Verbosity and stack trace display settings
`'backtrace'` | `'verbose'`

Verbosity and the stack trace display of settings, specified by `'backtrace'` or `'verbose'`. By default, the state of verbosity is set to `'off'` and the state of stack trace display is set to `'on'`.

See Also

See Also

`dbstop` | `disp` | `error` | `errordlg` | `lasterror` | `lastwarn` | `sprintf` | `warndlg`

Topics

"Issue Warnings and Errors"
"Suppress Warnings"
"Restore Warnings"
"Change How Warnings Display"

Introduced before R2006a

waterfall

Waterfall plot



Syntax

```
waterfall(Z)
waterfall(X,Y,Z)
waterfall(...,C)
waterfall(axes_handles,...)
h = waterfall(...)
```

Description

The `waterfall` function draws a mesh similar to the `meshz` function, but it does not generate lines from the columns of the matrices. This produces a "waterfall" effect.

`waterfall(Z)` creates a waterfall plot using `x = 1:size(Z,2)` and `y = 1:size(Z,1)`. `Z` determines the color, so color is proportional to surface height.

`waterfall(X,Y,Z)` creates a waterfall plot using the values specified in `X`, `Y`, and `Z`. `Z` also determines the color, so color is proportional to the surface height. If `X` and `Y` are vectors, `X` corresponds to the columns of `Z`, and `Y` corresponds to the rows, where `length(x) = n`, `length(y) = m`, and `[m,n] = size(Z)`. `X` and `Y` are vectors or matrices that define the *x*- and *y*-coordinates of the plot. `Z` is a matrix that defines the *z*-coordinates of the plot (i.e., height above a plane). If `C` is omitted, color is proportional to `Z`.

`waterfall(...,C)` uses scaled color values to obtain colors from the current colormap. Color scaling is determined by the range of `C`, which must be the same size as `Z`.

MATLAB performs a linear transformation on `C` to obtain colors from the current colormap.

`waterfall(axes_handles,...)` plots into the axes with handle `axes_handle` instead of the current axes (`gca`).

`h = waterfall(...)` returns the handle of the patch graphics object used to draw the plot.

Examples

Create Waterfall Plot

Create a waterfall plot of the peaks function.

```
figure
[X,Y,Z] = peaks(30);
waterfall(X,Y,Z)
```

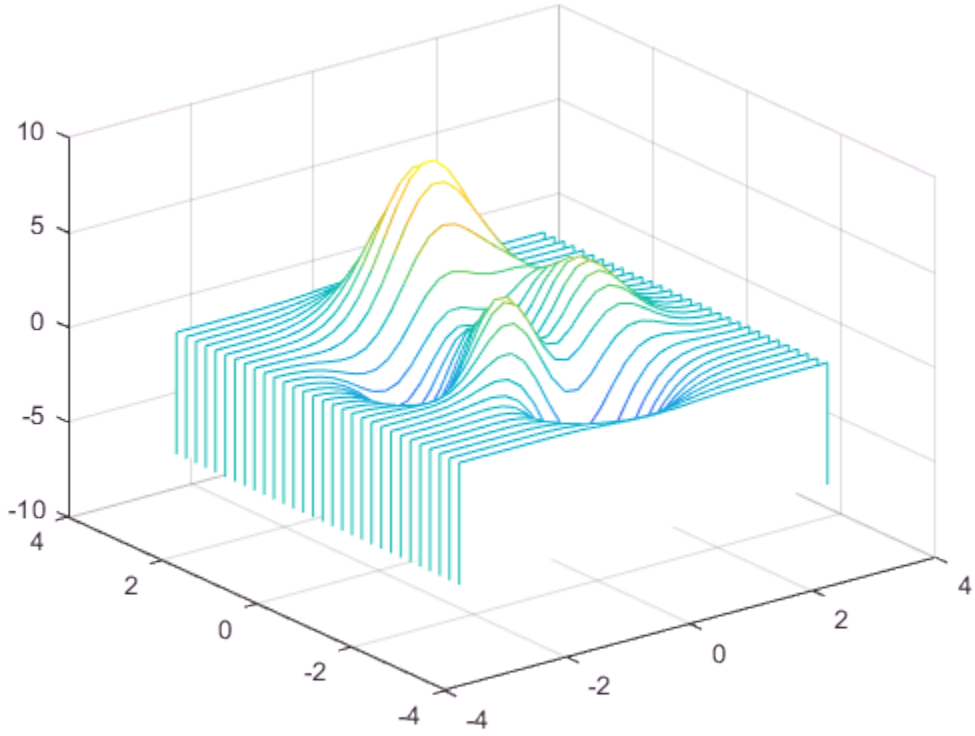

Tips

For column-oriented data analysis, use `waterfall(Z')` or `waterfall(X',Y',Z')`.

Algorithms

The range of `X`, `Y`, and `Z`, or the current setting of the axes `XLim`, `YLim`, and `ZLim` properties, determines the range of the axes (also set by `axis`). The range of `C`, or the

current setting of the axes `CLim` property, determines the color scaling (also set by `caxis`).

The `CData` property for the patch graphics objects specifies the color at every point along the edge of the patch, which determines the color of the lines.

The waterfall plot looks like a mesh surface; however, it is a patch graphics object. To create a surface plot similar to `waterfall`, use the `meshz` function and set the `MeshStyle` property of the surface to `'Row'`. For a discussion of parametric surfaces and related color properties, see `surf`.

See Also

See Also

`axis` | `caxis` | `meshz` | `ribbon` | `surf`

Introduced before R2006a

web

Open web page or file in browser

Syntax

```
web
web(url)
web(url,opt)
web(url,opt1,...,optN)

stat = web( ___ )
[stat,h] = web( ___ )
[stat,h,url] = web( ___ )
```

Description

`web` opens an empty MATLAB web browser.

`web(url)` opens the page specified by `url` in the MATLAB web browser. If multiple browsers are open, the page displays in the one that was most recently used.

`web(url,opt)` opens the page using the specified browser option, such as `'-new'` to create a new browser instance or `'-browser'` to use the system browser.

`web(url,opt1,...,optN)` opens the page using one or more browser options.

`stat = web( ___ )` returns the status of the operation: `0` if successful, `1` or `2` if unsuccessful. You can include any of the input arguments in previous syntaxes.

`[stat,h] = web( ___ )` returns a handle to the MATLAB web browser that allows you to close it using the command `close(h)`. If you do not specify any inputs to the `web` function, such as `[stat,h] = web`, then the handle corresponds to the most recently used MATLAB web browser.

`[stat,h,url] = web( ___ )` returns the URL of the current page in the MATLAB web browser.

Examples

Open Web Page in MATLAB Web Browser

Open the MathWorks® Web site home page.

```
url = 'http://www.mathworks.com';
web(url)
```

Open the page in a new instance of the browser that does not include a toolbar.

```
web(url,'-new','-notoolbar')
```

File in MATLAB Web Browser

View an HTML file that resides on your system.

Create an HTML file by publishing an example program file. Copy the program file to the current folder so that the code can run during the publishing process.

```
program = fullfile(matlabroot,'help','techdoc',...
          'matlab_env','examples','fourier_demo2.m');
copyfile(program);
htmlFile = publish('fourier_demo2.m');
```

View a file by specifying the file name.

```
web(htmlFile)
```

Alternatively, you can use the `file:///` URL scheme, as long as you include the full path. The `publish` function returns the path in the `htmlFile` output.

```
url = ['file:///',htmlFile];
web(url)
```

Open Web Page in System Browser

Open the MathWorks® Web site home page in the system browser.

```
url = 'http://www.mathworks.com';
web(url,'-browser')
```

Send Email from System Browser

Send an email from your system browser's default mail application using the `mailto:` URL scheme.

To run this example, replace the value for `email` with a valid email address.

```
email = 'myaddress@provider.ext';
url = ['mailto:',email];
web(url)
```

Create Handle to MATLAB Web Browser

Open the MathWorks® Web site home page, and then close the browser using its handle.

```
url = 'http://www.mathworks.com';
[stat,h] = web(url);
```

Close the browser window.

```
close(h)
```

Display Text in MATLAB Web Browser

View formatted text using the `text://` URL scheme.

```
web('text://<html><h1>Hello World</h1></html>')
```

Input Arguments

`url` — Web page address or file location

character vector

web page address or file location, specified as a character vector. File locations can include an absolute or relative path.

If `url` corresponds to a file in the installed product documentation, then the page displays in the MATLAB Help browser instead of the web browser.

Example: `'http:\\www.mathworks.com'`

Example: `'myfolder/myfile.html'`

`opt` — Browser option

`'-browser'` | `'-new'` | `'-noaddressbox'` | `'-notoolbar'`

Browser option, specified as one of the following. Options can appear in any order.

`'-browser'`	Opens the page in a system browser window instead of the MATLAB web browser. On Microsoft Windows and Apple Macintosh platforms, the operating system determines the system web browser. On other systems, the default is the Mozilla® Firefox® browser, but you can change the default using MATLAB web preferences.
`'-new'`	Opens the page in a new MATLAB web browser window. Does not apply to the system browser.
`'-noaddressbox'`	Opens the page in a browser that does not display the address box. Only applies to new instances of the MATLAB web browser.
`'-notoolbar'`	Opens the page in a browser that does not display a toolbar or address box. Only applies to new instances of the MATLAB web browser.

Example: `'-new','-noaddressbox'`

Output Arguments

`stat` — Browser status

`0 | 1 | 2`

Browser status, returned as an integer with one of these values:

`0`	Found and started system browser.
`1`	Could not find system browser.
`2`	Found, but could not start system browser.

`h` — Handle to most recent MATLAB web browser

scalar

Handle to the most recent MATLAB web browser, returned as a scalar instance of the associated Java class. If you specify the `'-browser'` option to open the page in a system browser, `h` is empty, `''`.

If you do not request the handle when you open the page, the handle might not correspond to your most recent use of the `web` function. Other MATLAB functionality also uses the `web` function, such as links to external sites from the Help browser.

`url` — Current page address

character vector

Current page address in the most recent MATLAB web browser, returned as a character vector. If you specify the `'-browser'` option to open the page in a system browser, `url` is empty, `''`.

Tips

- If you plan to deploy an application that calls the `web` function using the MATLAB Compiler product, then use the `'-browser'` option.
- If you are displaying Japanese streaming text in the MATLAB web browser, specify a header that includes the `charset` attribute. For example:

```
web(['text://<html><head><meta http-equiv="content-type" ' ...
     'content="text/html;charset=utf-8"></head><body>TEXT</body></html>'])
```

See Also

See Also

matlab.net.http.RequestMessage | `urlread` | `urlwrite` | `weboptions` | `webread` | `websave` | `webwrite`

Topics

"Web Browsers and MATLAB"
"Specify Proxy Server Settings for Connecting to the Internet"
"Specify the System Browser for Linux Platforms"
"HTTP Interface"

Introduced before R2006a

weboptions

Specify parameters for RESTful web service

Syntax

```
options = weboptions
options = weboptions(Name,Value)
```

Description

`options = weboptions` returns a default `weboptions` object to specify parameters for a request to a web service. A `weboptions` object can be an optional input argument to the `webread`, `websave`, and `webwrite` functions. For options not supported by the `weboptions` function, see the "HTTP Interface".

`options = weboptions(Name,Value)` specifies one or more properties of a `weboptions` object.

Examples

Default weboptions Object

Create a default `weboptions` object and display the default values for its properties.

```
options = weboptions
```

```
options 
  weboptions with properties:

      CharacterEncoding: 'auto'
              UserAgent: 'MATLAB 9.2.0.538062 (R2017a)'
                Timeout: 5
               Username: ''
               Password: ''
                KeyName: ''
               KeyValue: ''
            ContentType: 'auto'
```

```
          ContentReader: []
              MediaType: 'application/x-www-form-urlencoded'
          RequestMethod: 'auto'
            ArrayFormat: 'csv'
           HeaderFields: []
    CertificateFilename: 'B:\matlab\sys\certificates\ca\rootcerts.pem'
```

User Name and Password in weboptions Object

Set your web service user name and password in a `weboptions` object. You can use the object as an input argument to `webread`, `websave`, or `webwrite` when your web service requires authentication.

```
options = weboptions('Username','jdoe','Password','mypassword')
```

```
options 
  weboptions with properties:

      CharacterEncoding: 'auto'
              UserAgent: 'MATLAB 9.2.0.538062 (R2017a)'
                Timeout: 5
               Username: 'jdoe'
               Password: '**********'
                KeyName: ''
               KeyValue: ''
            ContentType: 'auto'
          ContentReader: []
              MediaType: 'application/x-www-form-urlencoded'
          RequestMethod: 'auto'
            ArrayFormat: 'csv'
           HeaderFields: []
    CertificateFilename: 'B:\matlab\sys\certificates\ca\rootcerts.pem'
```

The password is obscured when you display the `weboptions` object. However, the object stores the password as plain text. You can retrieve the password from the `weboptions.Password` property.

```
options.Password
```

```
ans 
'mypassword'
```

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `weboptions('Timeout',60)` creates a `weboptions` object that sets the timeout connection duration to 60 seconds.

`'CharacterEncoding'` — Character encoding

`'auto'` (default) | string | character vector

Character encoding, specified as a string or character vector. Common encodings include `'US-ASCII'`, `'UTF-8'`, `'latin1'`, `'Shift_JS'`, and `'ISO-8859-1'`.

`'UserAgent'` — User agent identification

`['MATLAB ' version]` (default) | string | character vector

User agent identification, specified as a string or character vector indicating the client user agent.

`'Timeout'` — Timeout connection duration

5 (default) | positive numeric scalar | `Inf`

Timeout connection duration in seconds, specified as a positive numeric scalar. The maximum value is 2147.483647 seconds. Use `Inf` to set the maximum value.

`'Username'` — User identifier

`''` (default) | string | character vector

User identifier, specified as a string or character vector for basic HTTP authentication (no encryption).

`'Password'` — User authentication password

`''` (default) | string | character vector

User authentication password, specified as a string or character vector for basic HTTP authentication (no encryption). If you display a `weboptions` object with the `Password` property set, the value is displayed as a character vector containing '*'. However, the object stores the value of the `Password` property as plain text.

'KeyName' — Name of key

'' (default) | string | character vector

Name of a key, specified as a string or character vector. KeyName is an additional name to add to the HTTP request header. For example, KeyName can be a web service API key name.

Example: weboptions('KeyName','duration','KeyValue',7) creates a weboptions object that contains a key name, duration, defined by a web service.

'KeyValue' — Value of key

'' (default) | string | character vector | numeric | logical

Value of a key, specified as a string, a character vector, or a numeric or logical value to add to the HTTP request header. KeyValue is the value of a key specified by KeyName.

Example: weboptions('KeyName','duration','KeyValue',7) creates a weboptions object that contains a key value, 7, paired with a key name, duration.

'HeaderFields' — Names and values of header fields

m-by-2 cell array of strings or character vectors

Names and values of header fields, specified as an m-by-2 cell array of strings or character vectors to add to the HTTP request header. HeaderFields{i,1} is the name of a field and HeaderFields{i,2} is its value.

Example: weboptions('HeaderFields',{'Content-Length' '78';'Content-Type' 'application/json'}) creates a weboptions object that contains two header fields: Content-Length with value 78 and Content-Type with value application/json.

'ContentType' — Content type

'auto' (default) | string | character vector

Content type, specified as a string or character vector. Content type is used to convert the response from the server to a particular type. You can define the ContentType property of a weboptions object, and pass the object as an input argument to webread. Then webread returns data as that type of content. The table lists the valid content types.

ContentType Specifier	Output Type
'auto' (default)	Output type automatically determined based on content type.

ContentType Specifier	Output Type
'text'	Character vector for content types: text/plain text/html text/xml application/xml application/javascript application/x-javascript application/x-www-form-urlencoded If a web service returns a MATLAB file with a .m extension, the function returns its content as a character vector.
'image'	Numeric or logical matrix for image/format content. If the first output argument is an indexed image, the second output argument is the colormap, and the third output argument is the alpha channel. For supported image formats, see "Supported File Formats for Import and Export".
'audio'	Numeric matrix for audio/format content with numeric scalar sampling rate as a second output argument. For supported audio formats, see "Supported File Formats for Import and Export".
'binary'	uint8 column vector for binary content (that is, content not to be treated as type char).
'table'	Scalar table object for spreadsheet and CSV (text/csv) content.

ContentType Specifier	Output Type
'json'	char, numeric, logical, structure, or cell array, for application/json content.
'xmldom'	Java Document Object Model (DOM) node for text/xml or application/xml content. If not specified, the function returns XML content as a character vector.
'raw'	char column vector for 'text', 'xmldom', and 'json' content. The function returns any other content type as a uint8 column vector.

Example: weboptions('ContentType','text') creates a weboptions object that instructs webread to return text, JSON, or XML content as a character vector.

'ContentReader' — Content reader

[ ] (default) | function handle

Content reader, specified as a function handle. You can create a weboptions object with ContentReader specified, and pass the object as an input argument to webread. Then webread downloads data from a web service and reads the data with the function specified by the function handle. webread ignores ContentType when ContentReader is specified.

Example: weboptions('ContentReader',@readtable) creates a weboptions object that instructs webread to use readtable to read content as a table.

'MediaType' — Media type

'application/x-www-form-urlencoded' (default) | string | character vector

Media type, specified as a string or character vector. Media type determines the type of content (media) to send to the server. See Internet Media Types for a complete list of media types.

Example: weboptions('MediaType','application/json') creates a weboptions object that instructs webwrite to encode character vector data as JSON to post it to a web service.

'RequestMethod' — HTTP request method

'auto' (default) | string | character vector | matlab.net.http.RequestMethod enumeration

HTTP request method, specified as a string, a character vector, or a `matlab.net.http.RequestMethod` enumeration as one of these values:

- `'auto'`
  - `webread` and `websave` use the HTTP GET method.
  - `webwrite` uses the HTTP POST method.
- `'get'` for use with the `webread` and `websave` functions.
- `'post'` for use with the `webread`, `webwrite`, and `websave` functions.
- `'put'` for use with the `webread`, `webwrite`, and `websave` functions.
- `'delete'` for use with the `webread`, `webwrite`, and `websave` functions.
- `'patch'` for use with the `webread`, `webwrite`, and `websave` functions.

The `webread` and `websave` functions put the query into the URL regardless of the `RequestMethod`. `webwrite` puts the query into the data regardless of the `RequestMethod`.

Example: `weboptions('RequestMethod','post')` creates a `weboptions` object that instructs `webread`, `websave`, or `webwrite` to use the HTTP POST method of a web service.

`'ArrayFormat'` — Format to form-encode query or post values that represent multiple values

`'csv'` (default) | `'json'` | `'repeating'` | `'php'`

Format to form-encode query or post values that represent multiple values, specified as `'csv'`, `'json'`, `'repeating'`, or `'php'`. A query or post value contains multiple values if it is

- A numeric, logical, or `datetime` vector
- A character array with more than one row
- A cell vector, where each element is a numeric, logical, or `datetime` scalar or a character vector with one row

No other data types or dimensions are supported.

This table shows form-encoded conversions for each format, for a query parameter named `'parameter'` and a query value of `[1 2 3]`. The web service specifies the conversion to use.

ArrayFormat Specifier	Form-Encoded Conversion
'csv' (default)	parameter=1,2,3
'json'	parameter=[1,2,3]
'repeating'	parameter=1&parameter=2&parameter=3
'php'	parameter[]=1&parameter[]=2&parameter[]=3

To encode a scalar as a one-element array with the 'json' or 'php' specifiers, place the scalar in a one-element cell array.

Example: weboptions('ArrayFormat','repeating') creates a weboptions object that instructs webread, websave, or webwrite to form-encode any query or post value with multiple values as repeating query parameters.

'CertificateFilename' — File name of root certificates

string | character vector | 'default'

File name of root certificates, specified as a string or character vector denoting the location of a file containing certificates. The file is in privacy-enhanced mail (PEM) format. The location must be in the current folder, in a folder on the MATLAB path, or a full or relative path to a file. If you specify the value 'default', then CertificateFilename is set to the MATLAB certificate file at:

```
fullfile(matlabroot,'sys','certificates','ca','rootcerts.pem')
```

If CertificateFilename is not empty and you request an HTTPS connection, then the certificate from the server is validated against the certification authority certificates in the PEM file. Standard HTTPS mechanisms use this validation to validate the signature on the server certificate and the entire certificate chain. If verification fails, a connection is not allowed.

To add certificates to rootcerts.pem, copy the file to a working folder, edit the file, and add your certificates to it. PEM files are ASCII files which are easily modified. Since security of HTTPS connections depends on the integrity of this file, protect it appropriately. MATLAB does not manage certificates or certificate files, but there are third-party tools for managing PEM files.

If CertificateFilename is empty, then MATLAB checks if the certificate domain of the server matches the host name of the server and that it is not expired. The signature is not validated.

Set `CertificateFilename` to empty (`''`) only if you cannot establish a connection due to a missing or expired certificate.

See Also

See Also

RequestMethod | `webread` | `websave` | `webwrite`

Topics

"HTTP Interface"

Introduced in R2014b

webread

Read content from RESTful web service

Syntax

```
data = webread(url)
data = webread(url,
QueryName1,QueryValue1,...,QueryNameN,QueryValueN)
data = webread( ___ ,options)

[data,colormap,alpha] = webread( ___ )

[data,Fs] = webread( ___ )
```

Description

`data = webread(url)` reads content from the web service specified by `url` and returns the content in `data`.

The web service provides a "RESTful API" on page 1-12462 that returns data formatted as an internet media type such as JSON, XML, image, or text.

`data = webread(url, QueryName1,QueryValue1,...,QueryNameN,QueryValueN)` appends query parameters to `url`, as specified by one or more pairs of name-value arguments. The web service defines the query parameters.

`data = webread( ___ ,options)` adds other HTTP request options, specified by the `weboptions` object `options`. You can use this syntax with any of the input arguments of the previous syntaxes.

To return data as a specific output type, specify the `ContentType` property of `options`.

To read content with a function, specify the `ContentReader` property of `options` as a handle to the function. `webread` downloads data from a web service and reads the data with the specified function:

- If you specify a handle to a function that returns multiple output arguments, `webread` returns all output arguments.
- If you specify a handle to a function that returns no output argument (such as Image Processing Toolbox function `@implay` for video files), `webread` returns no output argument.

`webread` supports HTTP GET and POST methods. To send an HTTP POST request, specify the `RequestMethod` property of `options` as `'post'`. Many web services provide both GET and POST methods to request data.

`[data,colormap,alpha] = webread( ___ )` reads an image from the web service specified by `url` and returns the image in `data`. You can use the previous syntaxes to return the image only. Use this syntax to return the colormap and alpha channels associated with the image.

`webread` returns an image when the HTTP response has a `Content-Type` header field that specifies an image media type and if the image format is supported by `imread`. For supported image formats, see "Supported File Formats for Import and Export".

`[data,Fs] = webread( ___ )` reads audio data from the web service specified by `url` and returns the audio data in `data`. You can use the previous syntaxes to return the audio data only. Use this syntax to return the sample rate of the audio data in hertz.

`webread` returns audio data when the HTTP response has a `Content-Type` header field that specifies an audio media type and if the audio format is supported by `audioread`. For supported audio formats, see "Supported File Formats for Import and Export".

Examples

Read Image from Website

Read an image of Jupiter from the Hubble Heritage website and display it.

```
url = 'http://heritage.stsci.edu/2007/14/images/p0714aa.jpg';
rgb = webread(url);
whos rgb
```

```
  Name          Size                    Bytes  Class    Attributes

  rgb        1000x800x3              2400000  uint8
```

Resize and display the image.

```
rgb = imresize(rgb,0.6);
imshow(rgb)
```

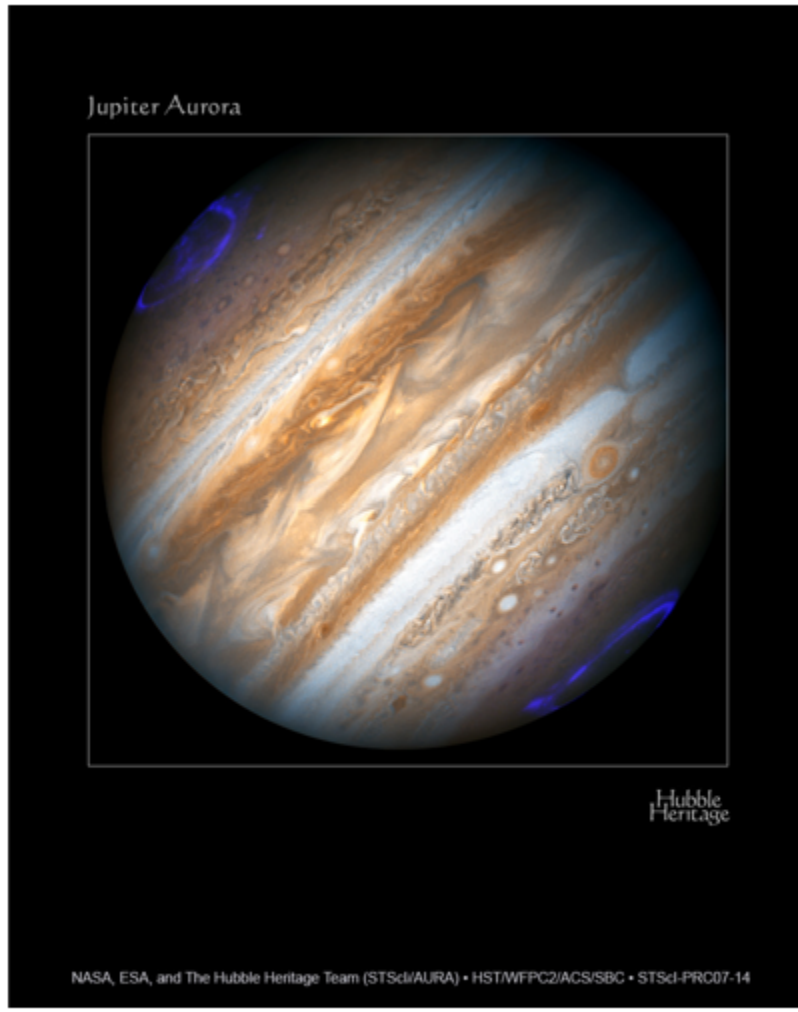

Jupiter image courtesy of NASA, ESA, and the Hubble Heritage Team (STScI/AURA). (See Hubble Heritage Information Center for terms of use.)

Read Data from Web Service API

Read temperature data for the USA from the World Bank Climate Data API. Plot temperatures from the years 1901–2012.

Read data from the World Bank. This API returns data as a JSON object.

```
api = 'http://climatedataapi.worldbank.org/climateweb/rest/v1/';
url = [api 'country/cru/tas/year/USA'];
S = webread(url)
```

```
S =

112x1 struct array with fields:

    year
    data
```

`webread` converts the JSON object to a structure array. Each structure contains the year and the average temperature in the USA for that year, in degrees Celsius.

Display the temperature for the first year.

```
S(1)
```

```
ans =

    year: 1901
    data: 6.6187
```

Plot the average temperatures. Concatenate `S.year` and `S.data` into arrays and plot them.

```
year = [S.year];
data = [S.data];
plot(year,data)
xlabel('Year');
ylabel('Temperature (Celsius)');
title('USA Average Temperatures')
axis tight
```

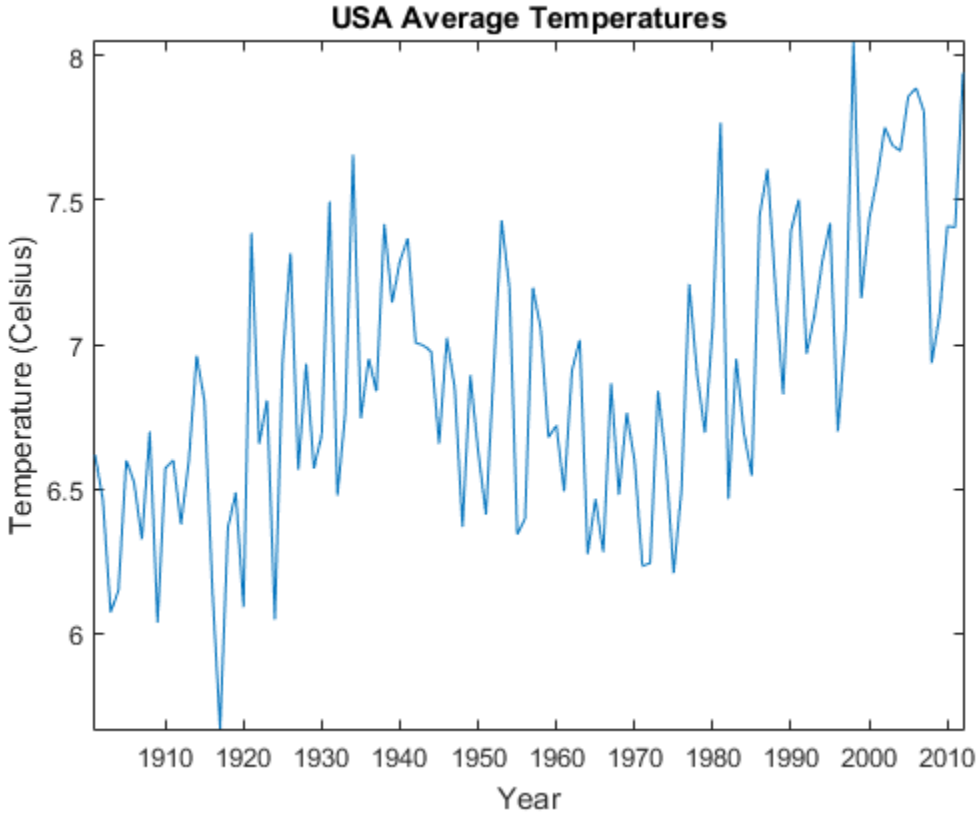

API and data courtesy of the World Bank: Climate Data API. (See World Bank: Climate Data API for more information about the API, and World Bank: Terms of Use.)

Specify Web Service Query Parameters

Search the File Exchange for files uploaded within the past seven days that contain the word *Simulink*.

Specify the query parameters. `webread` appends web service query parameter names and values to the URL. The File Exchange web service defines the `term` and `duration` query parameters, not the `webread` function.

```
url = 'http://www.mathworks.com/matlabcentral/fileexchange/';
data = webread(url,'term','simulink','duration',7);
```

`webread` returns the HTML for the search result page as a character array.

Specify Request Option

Specify an additional request option to read data from the World Bank Climate Data API to a character array.

Create a `weboptions` object and set its `ContentType` to `'text'`. The `webread` function converts the JSON object to a character array instead of a structure array. Display the beginning of the character array.

```
api = 'http://climatedataapi.worldbank.org/climateweb/rest/v1/';
url = [api 'country/cru/tas/year/USA'];
options = weboptions('ContentType','text');
data = webread(url,options);
data(1:62)
```

```
ans =

[{"year":1901,"data":6.6187487},{"year":1902,"data":6.4643273}
```

API and data courtesy of the World Bank: Climate Data API. (See World Bank: Climate Data API for more information about the API, and World Bank: Terms of Use.)

Read Data with POST Request

Send an HTTP POST request to search File Exchange for files uploaded within the past seven days that contain the word *Simulink*.

```
url = 'http://www.mathworks.com/matlabcentral/fileexchange/';
options = weboptions('RequestMethod','post');
data = webread(url,'term','simulink','duration',7,options);
```

Many web services provide a POST method for requesting data in addition to GET.

Specify Date and Time as Query Parameters

Read a Blue Marble: Next Generation image for December 2004 from the NASA Earth Observation (NEO) Web Mapping Service.

Specify the date of the requested image with a `datetime` object. Specify the `Format` property of `D` so that the format matches the format required by the web service.

```
url = 'http://neowms.sci.gsfc.nasa.gov/wms/wms';
```

```
D = datetime(2004,12,01,'Format','yyyy-MM-dd');
rgb = webread(url,'Time',D, ...
     'Service','WMS','Layers','BlueMarbleNG-TB','CRS','CRS:84', ...
     'Format','image/jpeg','Height',256,'Width',512, ...
     'BBOX','-180.0,-90.0,180.0,90.0','Version','1.3.0','Request','GetMap');
imshow(rgb)
```

`webread` converts `datetime` objects so that they can be values of web service query parameters. All the name-value pairs in the example provide query parameters specified by the NEO Web Mapping Service.

Blue Marble: Next Generation + Topography and Bathymetry image courtesy of NASA's Earth Observatory. Access to imagery and services provided by the NEO Web Mapping Service (WMS). (See NASA Earth Observations for credit and terms of use. See WMS 1.3.0 Capabilities for WMS query parameters.)

- "Download Data from Web Service"
- "Convert Data from Web Service"
- "Represent Dates and Times in MATLAB"

Input Arguments

`url` — URL to web service

character array

URL to a web service, specified as a character array. The web service implements a RESTful interface. See "RESTful API" on page 1-12462 for more information.

Example: `webread('http://www.mathworks.com/matlabcentral')` reads the web page and returns its HTML as a character array.

`QueryName1,QueryValue1,...,QueryNameN,QueryValueN` — Web service query parameters

name-value pairs

Web service query parameters, specified as one or more pairs of name-value arguments. A `QueryName` argument must specify the name of a query parameter. A `QueryValue` argument must be a character array or a numeric, logical, or `datetime` value that specifies the value of the query parameter. Numeric, logical, and `datetime` values can be in arrays. The web service defines name-value pairs that it accepts as part of a request.

When you specify `QueryValue` as a `datetime` object, you must specify its `Format` property so that it is consistent with the format required by the web service. If the `Format` property includes a time zone or offset, and the `datetime` object is not zoned, then `webread` specifies `'Local'` as the time zone.

When `QueryValue` contains multiple values in an array, you might need to specify the `ArrayFormat` property of a `weboptions` object to form-encode the array as specified by the web service.

Example: `webread('http://www.mathworks.com/matlabcentral/fileexchange/','term','webread')` retrieves a list of files uploaded to the File Exchange that contain the word `webread`.

`options` — Additional HTTP request options

`weboptions` object

Additional HTTP request options, specified as a `weboptions` object.

You can specify the `ContentType` property of a `weboptions` object, and pass the object as an input argument to `webread`. Then `webread` returns `data` as that type of output. The table lists the valid content types you can specify in a `weboptions` object.

ContentType Specifier	Output Type
'auto' (default)	Output type automatically determined based on content type.
'text'	Character vector for content types: text/plain text/html text/xml application/xml application/javascript application/x-javascript application/x-www-form-urlencoded If a web service returns a MATLAB file with a .m extension, the function returns its content as a character vector.
'image'	Numeric or logical matrix for image/format content. If the first output argument is an indexed image, the second output argument is the colormap, and the third output argument is the alpha channel. For supported image formats, see "Supported File Formats for Import and Export".
'audio'	Numeric matrix for audio/format content with numeric scalar sampling rate as a second output argument. For supported audio formats, see "Supported File Formats for Import and Export".
'binary'	uint8 column vector for binary content (that is, content not to be treated as type char).

ContentType Specifier	Output Type
'table'	Scalar table object for spreadsheet and CSV (text/csv) content.
'json'	char, numeric, logical, structure, or cell array, for application/json content.
'xmldom'	Java Document Object Model (DOM) node for text/xml or application/xml content. If not specified, the function returns XML content as a character vector.
'raw'	char column vector for 'text', 'xmldom', and 'json' content. The function returns any other content type as a uint8 column vector.

See weboptions for all request options that are weboptions properties.

Output Arguments

data — Content from web service

scalar | array | structure | table

Content read from a web service, returned as a scalar, array, structure, or table.

colormap — Colormap associated with indexed image

numeric array

Colormap associated with an indexed image, returned as a numeric array.

alpha — Alpha channels associated with indexed image

numeric array

Alpha channels associated with an indexed image, returned as a numeric array.

Fs — Sample rate of audio data in hertz

positive numeric scalar

Sample rate of audio data in hertz, returned as a positive numeric scalar.

Definitions

RESTful API

REST means *representational state transfer*, a common architectural style for web services. RESTful APIs or interfaces provide standard HTTP methods such as GET, PUT, POST, or DELETE.

Tips

- For functionality not supported by the RESTful web services functions, see the "HTTP Interface".
- For HTTP POST requests, the `webread` function supports only the `application/x-www-form-urlencoded` media type. To send a POST request with content of any other internet media type, use `webwrite`.

See Also

See Also

`audioread` | `datetime` | `imread` | `jsondecode` | `readtable` | `weboptions` | `websave` | `webwrite` | `xmlread`

Topics

"Download Data from Web Service"
"Convert Data from Web Service"
"Represent Dates and Times in MATLAB"
"HTTP Interface"

External Websites

Representational State Transfer
JavaScript Object Notation (JSON)

Introduced in R2014b

websave

Save content from RESTful web service to file

Syntax

```
outfilename = websave(filename,url)
outfilename = websave(filename,url,
QueryName1,QueryValue1,...,QueryNameN,QueryValueN)
outfilename = websave( ___ ,options)
```

Description

`outfilename = websave(filename,url)` saves content from the web service specified by `url` and writes it to `filename`. The `websave` function returns the full filename path as `outfilename`.

The web service provides a "RESTful API" on page 1-12467 that returns data formatted as an internet media type such as JSON, XML, image, or text.

`outfilename = websave(filename,url, QueryName1,QueryValue1,...,QueryNameN,QueryValueN)` appends query parameters to `url`, as specified by one or more pairs of name-value arguments. The web service defines the query parameters.

`outfilename = websave( ___ ,options)` adds other HTTP request options, specified by the `weboptions` object `options`. You can use this syntax with any of the input arguments of the previous syntaxes.

`websave` supports HTTP GET and POST methods. To send an HTTP POST request, specify the `RequestMethod` property of `options` as `'post'`. Many web services provide both GET and POST methods to request data.

Examples

Save Image from Website

Save an image of Jupiter from the Hubble Heritage website.

```
url = 'http://heritage.stsci.edu/2007/14/images/p0714aa.jpg';
filename = 'jupiter_aurora.jpg';
outfilename = websave(filename,url)
```

```
outfilename =

C:\Libraries\Documents\jupiter_aurora.jpg
```

`websave` saves the image as a JPEG file, as specified by the Hubble web service, even when you give `filename` a different extension. (Jupiter image courtesy of NASA, ESA, and the Hubble Heritage Team (STScI/AURA). See Hubble Heritage Information Center for terms of use.)

Save Search Results to File

Search File Exchange for files uploaded within the past 7 days that contain the word *Simulink* and display the results of the search.

```
url = 'http://www.mathworks.com/matlabcentral/fileexchange/';
filename = 'simulink_search.html';
outfilename = websave(filename,url,'term','simulink','duration',7)
```

```
outfilename =

C:\Libraries\Documents\simulink_search.html
```

Display the HTML file in a web browser.

```
web(outfilename)
```

Save Data to File

Save sunspot data from the National Geophysical Data Center (NGDC) to an ASCII file. Use a `weboptions` object to set the timeout value to `Inf` so that the connection does not time out.

```
api = 'http://www.ngdc.noaa.gov/stp/space-weather/';
url = [api 'solar-data/solar-indices/sunspot-numbers/' ...
       'american/lists/list_aavso-arssn_yearly.txt'];
filename = 'sunspots_annual.txt';
options = weboptions('Timeout',Inf);
outfilename = websave(filename,url,options)
```

```
outfilename =
```

```
C:\Libraries\Documents\sunspots_annual.txt
```

Aggregated data and web service courtesy of the NGDC. Sunspot data courtesy of the American Association of Variable Star Observers (AAVSO), originally published in AAVSO Sunspot Counts: 1943-2013, AAVSO Solar Section (R. Howe, Chair). (See NGDC Privacy Policy, Disclaimer, and Copyright for NGDC terms of use, and AAVSO Solar Section for AAVSO terms of use.)

Save Data with POST Request

Send an HTTP POST request to search File Exchange for files uploaded within the past 7 days that contain the word *Simulink*. Save the results of the search to an HTML file.

```
url = 'http://www.mathworks.com/matlabcentral/fileexchange/';
filename = 'simulink_search.html';
options = weboptions('RequestMethod','post');
outfilename = websave(filename,url,'term','simulink','duration',7,options);
```

Many web services provide a POST method for requesting data in addition to GET.

Save Data for Specified Date and Time

Save the Blue Marble: Next Generation image for December 2004 from the NASA Earth Observation (NEO) Web Mapping Service.

Specify the date of the requested image with a `datetime` object. Specify the `Format` property of `D` so that the format matches the format required by the web service.

```
url = 'http://neowms.sci.gsfc.nasa.gov/wms/wms';
D = datetime(2004,12,01,'Format','yyyy-MM-dd');
filename = 'BlueMarble.jpg';
outfilename = websave(filename,url,'Time',D, ...
     'Service','WMS','Layers','BlueMarbleNG-TB','CRS','CRS:84', ...
     'Format','image/jpeg','Height',256,'Width',512, ...
     'BBOX','-180.0,-90.0,180.0,90.0','Version','1.3.0','Request','GetMap')
```

```
outfilename =

C:\Libraries\Documents\BlueMarble.jpg
```

`websave` converts `datetime` objects so that they can be values of web service query parameters. All the name-value pairs in the example provide query parameters specified by the NEO Web Mapping Service.

Blue Marble: Next Generation + Topography and Bathymetry image courtesy of NASA's Earth Observatory. Access to imagery and services provided by the NEO Web Mapping Service (WMS). (See NASA Earth Observations for credit and terms of use. See WMS 1.3.0 Capabilities for WMS query parameters.)

- "Download Web Page and Files"
- "Represent Dates and Times in MATLAB"

Input Arguments

`filename` — Name of file to save content to

character array

Name of file to save content to, specified as a character array. `websave` saves the content as is. `websave` ignores `options.ContentType` and `options.ContentReader`, even if these properties are set.

Example: `websave('matlabcentral.html','http://www.mathworks.com/matlabcentral')` reads the web page and saves its HTML to the file `matlabcentral.html`.

`url` — URL to web service

character array

URL to a web service, specified as a character array. The web service implements a RESTful interface. See "RESTful API" on page 1-12467 for more information.

`QueryName1,QueryValue1,...,QueryNameN,QueryValueN` — Web service query parameters

name-value pairs

Web service query parameters, specified as one or more pairs of name-value arguments. A `QueryName` argument must specify the name of a query parameter. A `QueryValue` argument must be a character array or a numeric, logical, or `datetime` value that specifies the value of the query parameter. Numeric, logical, and `datetime` values can be in arrays. The web service defines name-value pairs that it accepts as part of a request.

When you specify `QueryValue` as a `datetime` object, you must specify its `Format` property to be consistent with the format required by the web service. If the `Format` property includes a time zone or offset, and the `datetime` object is not zoned, then `websave` specifies `'Local'` as the time zone.

When `QueryValue` contains multiple values in an array, you might need to specify the `ArrayFormat` property of a `weboptions` object to form-encode the array as specified by the web service.

Example: `websave('webread_search.html','http://www.mathworks.com/matlabcentral/fileexchange/','term','simulink')` retrieves a list of files uploaded to the File Exchange that contain the word *`simulink`* and saves the search results to an HTML file.

`options` — Additional HTTP request options
`weboptions` object

Additional HTTP request options, specified as a `weboptions` object. For all request options that are `weboptions` properties, see `weboptions`.

Definitions

RESTful API

REST means *representational state transfer*, a common architectural style for web services. RESTful APIs or interfaces provide standard HTTP methods such as GET, PUT, POST, or DELETE.

Tips

- For functionality not supported by the RESTful web services functions, see the "HTTP Interface".
- For HTTP POST requests, the `websave` function supports only the `application/x-www-form-urlencoded` media type. To send a POST request with content of any other internet media type, use `webwrite`.

See Also

See Also
`datetime` | `weboptions` | `webread` | `webwrite`

Topics

"Download Web Page and Files"
"Represent Dates and Times in MATLAB"
"HTTP Interface"

External Websites

Representational State Transfer
JavaScript Object Notation (JSON)

Introduced in R2014b

webwrite

Write data to RESTful web service

Syntax

```
response = webwrite(url,
PostName1,PostValue1,...,PostNameN,PostValueN)
response = webwrite(url,data)
response = webwrite( ___ ,options)
```

Description

`response = webwrite(url, PostName1,PostValue1,...,PostNameN,PostValueN)` writes content to the web service specified by `url` and returns `response`. The input arguments `PostName1,PostValue1,...,PostNameN,PostValueN` specify the content as name-value pairs. `webwrite` form-encodes the name-value pairs in the body of an HTTP POST request to the web service. The web service defines `response`.

The web service provides a "RESTful API" on page 1-12474 that returns data formatted as an internet media type such as JSON, XML, image, or text.

`response = webwrite(url,data)` writes content to the web service specified by `url` and returns `response`. The input argument `data` specifies the content as a form-encoded character array. `webwrite` puts `data` in the body of an HTTP POST request to the web service. The web service defines `response`.

`response = webwrite( ___ ,options)` adds other HTTP request options, specified by the `weboptions` object `options`. You can use this syntax with any of the input arguments of the previous syntaxes.

To write content as an internet media type other than a form-encoded character array (`'application/x-www-form-urlencoded'`), specify the `MediaType` property of `options`.

To request data with an HTTP POST request and read the response with a function, specify the `ContentReader` property of `options` as a handle to the function. If you

specify a handle to a function that returns multiple output arguments, `webwrite` returns all output arguments.

Examples

Write Data to Web Service

Write a number to a channel feed on the ThingSpeak server and read it back.

To run this code, create a ThingSpeak account. Call `webwrite` using the Write API key and Channel ID from your ThingSpeak account. The default field name is `'field1'`.

```
thingSpeakURL = 'http://api.thingspeak.com/';
thingSpeakWriteURL = [thingSpeakURL 'update'];
writeApiKey = 'Your Write API Key';
fieldName = 'field1';
fieldValue = 42;
response = webwrite(thingSpeakWriteURL,'api_key',writeApiKey,fieldName,fieldValue)
```

If this call to `webwrite` is the first update to your ThingSpeak channel, `response` is `1`.

Read back the number you wrote to your channel. ThingSpeak provides a different URL to get the last entry to your channel. Your Channel ID is part of the URL.

```
channelID = num2str(Your Channel ID);
thingSpeakReadURL = [thingSpeakURL 'channels/' channelID '/fields/' fieldName '/last']
data = webread(thingSpeakReadURL,'api_key',writeApiKey)
```

```
data =

42
```

Write Form-Encoded Character Array

Write a number as a form-encoded character array to a channel feed on the ThingSpeak server and read it back.

To run this code, create a ThingSpeak account. Call `webwrite` using the Write API key and Channel ID from your ThingSpeak account. Encode your Write API Key and the number as a form-encoded character array. The default field name is `'field1'`.

```
thingSpeakURL = 'http://api.thingspeak.com/';
```

```
thingSpeakWriteURL = [thingSpeakURL 'update'];
writeApiKey = 'Your Write API Key';
data = 42;
data = num2str(data);
data = ['api_key=',writeApiKey,'&field1=',data];
response = webwrite(thingSpeakWriteURL,data)
```

If this call to `webwrite` is the first update to your ThingSpeak channel, `response` is `1`.

Read back the number you wrote to your channel. ThingSpeak provides a different URL to get the last entry to your channel. Your Channel ID is part of the URL.

```
channelID = num2str(Your Channel ID);
thingSpeakReadURL = [thingSpeakURL 'channels/' channelID '/fields/field1/last'];
data = webread(thingSpeakReadURL,'api_key',writeApiKey)
```

```
data =

42
```

Write JSON Object

Write a number as a JSON object to a channel feed on the ThingSpeak server and read the response as a JSON object.

To run this code, create a ThingSpeak account. Call `webwrite` using the Write API key and Channel ID from your ThingSpeak account. Create a structure where the fields are your Write API Key and the number. The default field name is `'field1'`. Specify the media type as `'application/json'`.

```
thingSpeakURL = 'http://api.thingspeak.com/update.json';
writeApiKey = 'Your Write API Key';
data = 42;
data = struct('api_key',writeApiKey,'field1',data);
options = weboptions('MediaType','application/json');
response = webwrite(thingSpeakURL,data,options)
```

```
response =

    channel_id: Your Channel ID
        field1: 42
        field2: []
        field3: []
        field4: []
```

```
        field5: []
        field6: []
        field7: []
        field8: []
    created_at: '2014-11-14T20:08:14Z'
      entry_id: 1
        status: []
      latitude: []
     longitude: []
     elevation: []
      location: []
```

As a response `webwrite` receives a JSON object that contains the number you wrote to your ThingSpeak channel. `webwrite` converts the JSON object and returns it as a structure in `response`.

Specify Data and Time

Write a number and a specific date to a channel feed on the ThingSpeak server. Read the number and date back.

To run this code, create a ThingSpeak account. Call `webwrite` using the Write API key and Channel ID from your ThingSpeak account. Specify the date for the feed entry with a `datetime` object.

```
thingSpeakURL = 'http://api.thingspeak.com/';
thingSpeakWriteURL = [thingSpeakURL 'update'];
writeApiKey = 'Your Write API Key';
fieldName = 'field1';
fieldValue = 42;
D = datetime(2015,3,22,8,15,30,'Format','yyyy-MM-dd HH:mm:ss');
response = webwrite(thingSpeakWriteURL,'api_key',writeApiKey,...
    fieldName,fieldValue,'created_at',D)
```

If this call to `webwrite` is the first update to your ThingSpeak channel, `response` is `1`.

Read back the last entry to your channel. ThingSpeak provides a different URL to get the last entry to your channel. Append `last.json` to the URL to get the data as a JSON object. Your Channel ID is part of the URL.

```
channelID = num2str(Your Channel ID);
thingSpeakReadURL = [thingSpeakURL 'channels/' channelID '/fields/' ...
    fieldName '/last.json'];
data = webread(thingSpeakReadURL,'api_key',writeApiKey)
```

```
data =

    created_at: '2015-03-22T08:15:30Z'
      entry_id: 1
        field1: '42'
```

The date in the `created_at` field matches the date specified in `D`.

- "Represent Dates and Times in MATLAB"

Input Arguments

`url` — URL to web service

character array

URL to a web service, specified as a character array. The web service implements a RESTful interface. See "RESTful API" on page 1-12474 for more information.

`PostName1,PostValue1,...,PostNameN,PostValueN` — Web service post parameters

name-value pairs

Web service post parameters, specified as one or more pairs of name-value arguments. A `PostName` argument must specify the name of a post parameter. A `PostValue` argument must be a character array or a numeric, logical, or `datetime` value that specifies the value of the post parameter. Numeric, logical, and `datetime` values can be in arrays. The web service defines name-value pairs that it accepts as part of a request. `webwrite` encodes the name-value pairs as a form-encoded character array in the body of an HTTP POST request and sets the content type to `application/x-www-form-urlencoded` by default.

When you specify `PostValue` as a `datetime` object, you must specify its `Format` property so that it is consistent with the format required by the web service. If the `Format` property includes a time zone or offset, and the `datetime` object is not zoned, then `webwrite` specifies `'Local'` as the time zone.

When a `PostValue` argument contains multiple values in an array, specify the `ArrayFormat` property of a `weboptions` object to form-encode the array as specified by the web service.

Example: `webwrite('http://www.mathworks.com/matlabcentral/fileexchange/','term','webwrite','duration',7)` retrieves a list of files

uploaded to the File Exchange within the past 7 days that contain the word `webwrite`. The File Exchange web service defines the `term` and `duration` parameters.

`data` — Data to write to web service
character array

Data to write to a web service, specified as a form-encoded character array. The web service implements a RESTful interface. `webwrite` puts `data` in the body of an HTTP POST request and sets the media type to `application/x-www-form-urlencoded` by default.

If `data` is not form-encoded, set the `MediaType` property of the `options` input argument to a different media type. See Internet Media Types for a complete list of media types.

Example: `webwrite('http://www.mathworks.com/matlabcentral/fileexchange/','term=webwrite&duration=7')` retrieves a list of files uploaded to the File Exchange within the past 7 days that contain the word `webwrite`. The File Exchange web service defines the `term` and `duration` parameters.

`options` — Additional HTTP request options
`weboptions` object

Additional HTTP request options, specified as a `weboptions` object. See `weboptions` for all request options that are `weboptions` properties.

Output Arguments

`response` — Response from web service
scalar | array | structure | table

Response from a web service, returned as a scalar, array, structure, or table.

Definitions

RESTful API

REST means *representational state transfer*, a common architectural style for web services. RESTful APIs or interfaces provide standard HTTP methods such as GET, PUT, POST, or DELETE.

Tips

- For functionality not supported by the RESTful web services functions, see the "HTTP Interface".
- The `webwrite` function writes `PostName,PostValue` input arguments as form-encoded character arrays. If you also specify the `options` input argument, then its `MediaType` property must be `'application/x-www-form-urlencoded'`.
- `webwrite` cannot convert `datetime` objects to JSON, because JSON does not define a standard date format.

See Also

See Also

`datetime` | `jsonencode` | `weboptions` | `webread` | `websave` | `xmlwrite`

Topics

"Represent Dates and Times in MATLAB"
"HTTP Interface"

External Websites

Representational State Transfer
JavaScript Object Notation (JSON)

Introduced in R2015a

week

Week number

Syntax

```
w = week(t)
w = week(t,weekType)
```

Description

`w = week(t)` returns the week-of-year numbers of the datetime values in `t`. The `m` output is a `double` array the same size as `t` and contains integer values from 1 to 53.

`w = week(t,weekType)` returns the type of week number specified by `weekType`.

Examples

Find Week of Year Numbers of Dates

```
t = datetime(2013,05,31):calmonths(3):datetime(2014,06,15)
```

```
t = 1×5 datetime array
   31-May-2013   31-Aug-2013   30-Nov-2013   28-Feb-2014   31-May-2014
```

```
w = week(t)
```

```
w =

    22    35    48     9    22
```

Input Arguments

`t` — Input date and time
`datetime` array

Input date and time, specified as a `datetime` array.

`weekType` — Type of week values
`'weekofyear'` (default) | `'weekofmonth'`

Type of week values, specified as either `'weekofyear'` or `'weekofmonth'`.

- If `weekType` is `'weekofyear'`, then `month` returns the week-of-year number. Week 1 is the week in which January 1 falls, even if fewer than 4 days of that week fall in the same year.
- If `weekType` is `'weekofmonth'`, then `month` returns the week-of-month number. Week 1 in a month is defined as the week in which the first day of the month falls, even if fewer than 4 days of that week fall in the same month.

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also
`day` | `month` | `quarter` | `year`

Introduced in R2014b

weekday

Day of week

Syntax

```
DayNumber = weekday(D)
[DayNumber,DayName] = weekday(D)
[DayNumber,DayName] = weekday(D,DayForm)
[DayNumber,DayName] = weekday(D,language)
[DayNumber,DayName] = weekday(D,DayForm,language)
```

Description

`DayNumber = weekday(D)` returns a number representing the day of the week for each element in `D`.

`[DayNumber,DayName] = weekday(D)` additionally returns abbreviated English names for the day of the week, in `DayName`.

`[DayNumber,DayName] = weekday(D,DayForm)` returns the name for the day of the week in the format specified by `DayForm`, in US English.

`[DayNumber,DayName] = weekday(D,language)` returns the abbreviated name for the day of the week in the language of the locale specified in `language`.

`[DayNumber,DayName] = weekday(D,DayForm,language)` returns the name for the day of the week in the specified format and in the language of the specified locale. You can specify `DayForm` and `language` in either order.

Examples

Return Day of Week of Date String

Determine the day of the week of December 21, 2012.

```
D = '21-Dec-2012';
```

```
[DayNumber,DayName] = weekday(D)
```

```
DayNumber = 6

DayName =
'Fri'
```

December 21, 2012 falls on a Friday.

Return Full Day Names of Multiple Date Numbers

Return the full name of the day of the week for a vector of serial date numbers.

```
D = [734999;735015];
DayForm = 'long';
[DayNumber,DayName] = weekday(D,DayForm)
```

```
DayNumber =

     5
     7


DayName = 2×8 char array
    'Thursday'
    'Saturday'
```

Return Full Day Names in Local Language

Return a day name in U.S. English using the `language` input argument.

```
D = 728647;
DayForm = 'long';
language = 'en_US';
[DayNumber,DayName] = weekday(D,DayForm,language)
```

```
DayNumber = 2

DayName =
'Monday'
```

In U.S. English, the name of the day of the week is `Monday`.

Return day names in the language of the current locale.

```
language = 'local';
[DayNumber,DayName] = weekday(D,DayForm,language);
```

The value of `DayName` depends on the locale. For example, in a French locale, the name of the day of the week is `Lundi`.

Return Day of Week of Date String in Custom Format

Determine the day of the week for a date specified in the format `mmm.dd.yyyy`. Call `datenum` inside of `weekday` to specify the format of the input text representing a date.

```
[DayNumber,DayName] = weekday(datenum('Dec.21.2012','mmmm.dd.yyyy'))
```

```
DayNumber = 6

DayName =
'Fri'
```

Input Arguments

`D` — Serial date numbers or text representing dates and times

vector | matrix | character vector | cell array of character vectors | character array

Serial date numbers or text representing dates and times. Date numbers can be specified as a vector or matrix. Text can be specified as a character vector, a cell array of character vectors, or a character array where each row represents a date. If `D` is a cell array of character vectors, it must be 1-by-`n` or `n`-by-1.

If `D` is a character vector, a cell array of character vectors, or a character array, the dates can be in one of the following formats.

Date Format	Example
`dd-mmm-yyyy`	`01-Mar-2000`
`mm/dd/yyyy`	`03/01/2000`
`yyyy-mm-dd`	`2000-03-01`

For text representing dates in other formats, first convert the dates to serial date numbers using the `datenum` function, before passing them to `weekday`.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `char` | `cell`

`DayForm` — Format of output day names

`'short'` (default) | `'long'`

Format of the output day names, specified as one of the following character vectors.

`DayForm`	Format of `DayName` Names	Example
`'short'`	Abbreviated name	`Mon`
`'long'`	Full name	`Monday`

`language` — Output language of day names

`'en_US'` (default) | `'local'`

Output language of day names in `DayName`, specified as one of the following character vectors.

`language`	Description
`'en_US'`	US English
`'local'`	Language of the current locale

Output Arguments

`DayNumber` — Value representing day of week

array of integers in the range `[1,7]`

Value representing the day of the week, returned as an array of integers in the range `[1,7]`, where `1` represents Sunday, and `7` represents Saturday.

- If input `D` is a numeric array, then the size of `DayNumber` is equivalent to the size of `D`.
- If input `D` is a cell array of character vectors, then `DayNumber` is an `m`-by-1 vector, where `m` is equivalent to the length of `D`.

`DayName` — Name of day of week

character array

Name of the day of the week, returned as a character array. The content of `DayName` depends on `DayForm`.

- If `DayForm` is `'short'`, then `DayName` contains an abbreviated name (for example, `Tues`).
- If `DayForm` is `'long'`, then `DayName` contains the full name of the weekday (for example, `Tuesday`).

`DayName` is `m`-by-`n`, where `m` is the number of dates represented in `D`.

See Also

See Also

`datenum` | `datevec` | `eomday`

Introduced before R2006a

what

List MATLAB files in folder

Syntax

```
what
what folderName
s = what(folderName)
```

Description

`what` lists the path for the current folder and all the MATLAB relevant files and folders found in the current folder. This list includes all files with MathWorks file extensions except MATLAB live scripts (`.mlx`). The list also includes all class and package folders. For more information, see "MathWorks File Extensions".

`what folderName` lists path, file, and folder information for `folderName`. You do not need to specify the `@` or `+` symbol for class and package folders. For example, `what table` lists the MATLAB files and folders in `toolbox/matlab/datatypes/@table`.

`s = what(folderName)` returns the results in a structure array.

Examples

List Path, File, and Folder Information

List the MATLAB files and folders in the `graph2d` folder. The location of this folder depends on your installation.

```
what graph2d
```

```
MATLAB Code files in folder matlabroot\toolbox\matlab\graph2d

Contents          figtoolset            loglog       putdowntext            setscribeobjectdata
axis              getcolumn             middrag      rbbox                  subplot
basicfitdatastat  getobj                moveaxis     scribeclearmode        texlabel
```

```
box               getorcreateobj        pan          scribeeventhandler     text
doclick           getscribecontextmenu  plot         scriberestoresavefcns  title
dokeypress        getscribeobjectdata   plotedit     scribetextdlg          xlabel
domymenu          grid                  plotyy       semilogx               ylabel
doresize          gtext                 polar        semilogy               zoom
enddrag           jpropeditutils        prepdrag     setscribecontextmenu

P-files in folder matlabroot\toolbox\matlab\graph2d

axis            jpropeditutils  plotyy          subplot         zoom

Classes in folder matlabroot\toolbox\matlab\graph2d

arrowline     axisobj       editline      fighandle     hgbin         scribehgobj
axischild     axistext      editrect      figobj        scribehandle
```

Find Supporting Files for Toolbox Package

Find the Fixed-Point Designer™ folders that contain MATLAB files.

```
s = what('fixpoint')
```

```
s =

        path: 'matlabroot\toolbox\fixpoint'
           m: {4x1 cell}
       mlapp: {0x1 cell}
         mat: {0x1 cell}
         mex: {0x1 cell}
         mdl: {0x1 cell}
         slx: {0x1 cell}
           p: {'hasFixedPointDesigner.p'}
     classes: {0x1 cell}
    packages: {'DataTypeWorkflow'}
```

List the packages in the *matlabroot*`\toolbox\fixpoint` folder.

```
s.packages
```

```
ans =

    'DataTypeWorkflow'
```

Find the supporting files for the `DataTypeWorkflow` package.

```
s2 = what('DataTypeWorkflow');
s2.p
```

```
ans =

    'DTWRun.p'
    'DiffRunResult.p'
```

```
'DiffSignalResult.p'
'Result.p'
```

Input Arguments

`folderName` — Name of folder

character vector

Name of folder, specified as a character vector.

It is not necessary to give the full path of the folder. Instead, you can specify a relative partial path. For example, `what strfun` and `what matlab/strfun` both list the MATLAB files in `toolbox/matlab/strfun`. For more information, see "Specify File Names".

Output Arguments

`s` — List of path, files, and folders

structure array

List of path, files, and folders returned as a structure array with these fields.

Field	Description
`path`	Full path to folder
`m`	Cell array of MATLAB program file names
`mlapp`	Cell array of MLAPP-file names
`mat`	Cell array of MAT-file names
`mex`	Cell array of MEX-file names
`mdl`	Cell array of MDL-file names
`slx`	Cell array of SLX-file names
`p`	Cell array of P-file names
`classes`	Cell array of class folders
`packages`	Cell array of package folders

See Also

See Also

`dir` | `exist` | `lookfor` | `ls` | `which` | `who`

Introduced before R2006a

whatsnew

Release Notes

Note: `whatsnew` will be removed in a future release.

Syntax

```
whatsnew
```

Description

`whatsnew` displays the MATLAB Release Notes in the Help browser, presenting information about new features, problems from previous releases that have been fixed in the current release, and compatibility issues.

See Also

`help` | `version`

Introduced before R2006a

which

Locate functions and files

Syntax

```
which item
which fun1 in fun2

which ___ -all

str = which(item)
str = which(fun1,'in',fun2)

str = which(___,'-all')
```

Description

`which item` displays the full path for `item`.

- If `item` is a MATLAB function in a MATLAB code file (`.m`, `.mlx`, or `.p` extension), or a Simulink model (`.slx` or `.mdl` extension), then `which` displays the full path for the corresponding file. `item` must be on the MATLAB path.
- If `item` is a method in a loaded Java class, then `which` displays the package, class, and method name for that method.
- If `item` is a workspace variable, then `which` displays a message identifying `item` as a variable.
- If `item` is a file name including the extension, and it is in the current working folder or on the MATLAB path, then `which` displays the full path of `item`.

If `item` is an overloaded function or method, then `which item` returns only the path of the first function or method found.

`which fun1 in fun2` displays the path to function `fun1` that is called by file `fun2`. Use this syntax to determine whether a local function is being called instead of a function on the path. This syntax does not locate nested functions.

`which ___ -all` displays the paths to all items on the MATLAB path with the requested name. Such items include methods of instantiated classes. You can use `-all` with the input arguments of any of the previous syntaxes.

`str = which(item)` returns the full path for `item` to `str`.

`str = which(fun1,'in',fun2)` returns the path to function `fun1` that is called by file `fun2`. Use this syntax to determine whether a local function is being called instead of a function on the path. This syntax does not locate nested functions.

`str = which(___,'-all')` returns the results of `which` to `str`. You can use this syntax with any of the input arguments in the previous syntax group.

Examples

Locate MATLAB Function

Locate the `pinv` function.

```
which pinv
```

```
matlabroot\toolbox\matlab\matfun\pinv.m
```

`pinv` is in the `matfun` folder of MATLAB.

You also can use function syntax to return the path to `str`. When using the function form of `which`, enclose all input arguments in single quotes.

```
str = which('pinv');
```

Locate Method in a Loaded Java Class

Create an instance of the Java® class. This loads the class into MATLAB®.

```
myDate = java.util.Date;
```

Locate the `setMonth` method.

```
which setMonth
```

```
setMonth is a Java method  % java.util.Date method
```

Locate Private Function

Find the `orthog` function in a private folder.

```
which private/orthog
```

```
matlabroot\toolbox\matlab\elmat\private\orthog.m  % Private to elmat
```

MATLAB displays the path for `orthog.m` in the `/private` subfolder of `toolbox/matlab/elmat`.

Determine if Local Function is Called

Determine which `parseargs` function is called by `area.m`.

```
which parseargs in area
```

```
% Local function of area
matlabroot\toolbox\matlab\specgraph\area.m (parseargs)
```

You also can use function syntax to return the path to `str`. When using the function form of `which`, enclose all input arguments in single quotes.

```
str = which('parseargs','in','area');
```

Locate Function Invoked with Given Input Arguments

Suppose you have a `matlab.io.MatFile` object that corresponds to the example MAT-file `'topography.mat'`:

```
matObj = matfile('topography.mat');
```

Display the path of the implementation of `who` that is invoked when called with the input argument `(matObj)`.

```
which who(matObj)
```

```
% matlab.io.MatFile method
matlabroot\toolbox\matlab\iofun\+matlab\+io\MatFile.m
```

Store the result to the variable `str`.

```
str = which('who(matObj)')
```

```
str =
matlabroot\toolbox\matlab\iofun\+matlab\+io\MatFile.m
```

If you do not specify the input argument `(matObj)`, then `which` returns only the path of the first function or method found.

```
which who
```

```
built-in (matlabroot\\toolbox\matlab\general\who)
```

Locate All Items with Given Name

Display the paths to all items on the MATLAB path with the name `fopen`.

```
which fopen -all
```

```
built-in (matlabroot\toolbox\matlab\iofun\fopen)
% serial method
matlabroot\toolbox\matlab\iofun\@serial\fopen.m

% icinterface method
matlabroot\toolbox\shared\instrument\@icinterface\fopen.m
matlabroot\toolbox\instrument\instrument\@i2c\fopen.m
```

Return Path Names

Return the results of `which` to `str`.

Find the `orthog` function in a private folder. You must use the function form of `which`, enclosing all arguments in parentheses and single quotes.

```
str = which('private/orthog','-all');
whos str
```

```
  Name      Size            Bytes  Class    Attributes

  str       1x1               206  cell
```

Input Arguments

`item` — Function or file to locate

character vector

Function or file to locate, specified as a character vector. When using the function form of `which`, enclose all `item` inputs in single quotes. `item` can be in one of the following forms.

Form of the `item` Input	Path to Display
fun	Display full path for `fun`, which can be a MATLAB function, Simulink model, workspace variable, method in a loaded Java class, or file name that includes the file extension. To display the path for a file that has no file extension, type `which file.` (The period following the filename is required). Use `exist` to check for the existence of files anywhere else.
`/`*fun*	Limit the search to functions named `fun` that are on the search path. For example, `which /myfunction` displays the full path for function `myfunction.m`, but not built-in or JAVA functions with the same name.
`private/`*fun*	Limit the search to private functions named `fun`. For example, `which private/orthog` or `which('private/orthog')` displays the path for `orthog.m` in the `/private` subfolder of the parent folder.
`fun(a1,...,an)`	Display the path to the implementation of function `fun` which would be invoked if called with the input arguments `a1,...,an`. Use this syntax to query overloaded functions. See the Example, "Locate Function Invoked with Given Input Arguments" on page 1-12490.

On Windows systems, `item` is not case sensitive. On UNIX systems, `item` is not case sensitive, but preference is given to results with an exact case match.

`fun1` — Function to locate

character vector

Function to locate, specified as a character vector. `fun1` can be the name of a function, or it can be in the form `fun(a1,...,an)`. For more information about the form, `fun(a1,...,an)`, see "Locate Function Invoked with Given Input Arguments" on page 1-12490.

When using the function form of `which`, enclose all `fun1` inputs in single quotes, for example, `which('myfun1','in','myfun2')`.

`fun2` — Calling file

character vector

Calling file, specified as a character vector. `fun2` can be the name of a file, or it can be in the form `fun(a1,...,an)`. For more information about the form, `fun(a1,...,an)`, see "Locate Function Invoked with Given Input Arguments" on page 1-12490.

When using the function form of `which`, enclose all `fun2` inputs in single quotes, for example, `which('myfun1','in','myfun2')`.

On Windows systems, `fun2` is not case sensitive. On UNIX systems, `fun2` is not case sensitive, but preference is given to results with an exact case match.

Output Arguments

`str` — Function or file location

character vector | cell array of character vectors

Function or file location, returned as a character vector or cell array of character vectors if you use `'-all'`.

- If `item` is a workspace variable, then `str` is the character vector `'variable'`.
- If `str` is a cell array of character vectors, then each row of `str` identifies a function. The functions are in order of precedence, unless they are shadowed. Among shadowed functions, you should not rely on the order of the functions in `str`. To determine if a function is shadowed, call `which` using command syntax. For example, `which test -all` displays the paths to all functions with the name `test`. Shadowed functions are indicated by the comment, `% Shadowed`.

Limitations

- When the class is not loaded, `which` only finds methods if they are defined in separate files in an @-folder and are not in any packages.

Tips

- For more information about how MATLAB uses scope and precedence when calling a function, see "Function Precedence Order".

See Also

See Also

`dir` | `doc` | `exist` | `fileparts` | `lookfor` | `mfilename` | `path` | `type` | `what` | `who`

Introduced before R2006a

while

`while` loop to repeat when condition is true

Syntax

```
while expression
    statements
end
```

Description

`while` *`expression`*`,` *`statements`*`, end` evaluates an expression, and repeats the execution of a group of statements in a loop while the expression is true. An expression is true when its result is nonempty and contains only nonzero elements (logical or real numeric). Otherwise, the expression is false.

Examples

Repeat Statements Until Expression Is False

Use a `while` loop to calculate `factorial(10)`.

```
n = 10;
f = n;
while n > 1
    n = n-1;
    f = f*n;
end
disp(['n! = ' num2str(f)])
```

```
n! = 3628800
```

Skip to Next Loop Iteration

Count the number of lines of code in the file `magic.m`. Skip blank lines and comments using a `continue` statement. `continue` skips the remaining instructions in the `while` loop and begins the next iteration.

```
fid = fopen('magic.m','r');
count = 0;
while ~feof(fid)
    line = fgetl(fid);
    if isempty(line) || strncmp(line,'%',1) || ~ischar(line)
        continue
    end
    count = count + 1;
end
count

count = 31

fclose(fid);
```

Exit Loop Before Expression Is False

Sum a sequence of random numbers until the next random number is greater than an upper limit. Then, exit the loop using a `break` statement.

```
limit = 0.8;
s = 0;

while 1
    tmp = rand;
    if tmp > limit
        break
    end
    s = s + tmp;
end
```

Definitions

Expression

An expression can include relational operators (such as `<` or `==`) and logical operators (such as `&&`, `||`, or `~`). Use the logical operators `and` and `or` to create compound expressions. MATLAB evaluates compound expressions from left to right, adhering to operator precedence rules.

Within the conditional expression of a `while...end` block, logical operators `&` and `|` behave as short-circuit operators. This behavior is the same as `&&` and `||`, respectively. Since `&&` and `||` consistently short-circuit in conditional expressions and statements, it is good practice to use `&&` and `||` instead of `&` and `|` within the expression. For example,

```
x = 42;
while exist('myfunction.m','file') && (myfunction(x) >= pi)
    disp('Expressions are true')
    break
end
```

The first part of the expression evaluates to false. Therefore, MATLAB does not need to evaluate the second part of the expression, which would result in an undefined function error.

Tips

- If you inadvertently create an infinite loop (that is, a loop that never ends on its own), stop execution of the loop by pressing **Ctrl+C**.
- If the conditional expression evaluates to a matrix, MATLAB evaluates the statements only if all elements in the matrix are true (nonzero). To execute statements if any element is true, wrap the expression in the `any` function.
- To programmatically exit the loop, use a `break` statement. To skip the rest of the instructions in the loop and begin the next iteration, use a `continue` statement.
- When nesting a number of `while` statements, each `while` statement requires an `end` keyword.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

See Also

See Also

`break` | `continue` | `end` | `for` | `if` | `Logical Operators: Short Circuit` | `return` | `switch`

Topics

"Array Comparison with Relational Operators"

Introduced before R2006a

whitebg

Change axes background color

Compatibility

`whitebg` is not recommended.

Syntax

```
whitebg
whitebg(fig)
whitebg(ColorSpec)
whitebg(fig, ColorSpec)
whitebg(fig, ColorSpec)
whitebg(fig)
```

Description

`whitebg` complements the colors in the current figure.

`whitebg(fig)` complements colors in all figures specified in the vector `fig`.

`whitebg(ColorSpec)` and `whitebg(fig, ColorSpec)` change the color of the axes, which are children of the figure, to the color specified by `ColorSpec`. Without a figure specification, `whitebg` or `whitebg(ColorSpec)` affects the current figure and the root's default properties so subsequent plots and new figures use the new colors.

`whitebg(fig, ColorSpec)` sets the default axes background color of the figures in the vector `fig` to the color specified by `ColorSpec`. Other axes properties and the figure background color can change as well so that graphs maintain adequate contrast. `ColorSpec` can be a 1-by-3 RGB color or a color name such as `'white'` or `'w'`.

`whitebg(fig)` complements the colors of the objects in the specified figures. This syntax is typically used to toggle between black and white axes background colors, and is where `whitebg` gets its name. Include the root window handle `(0)` in `fig` to affect the default properties for new windows or for `clf reset`.

Examples

Set the background color to blue-gray.

```
whitebg([0 .5 .6])
```

Set the background color to blue.

```
whitebg('blue')
```

Tips

`whitebg` works best in cases where all the axes in the figure have the same background color.

`whitebg` changes the colors of the figure's children, with the exception of shaded surfaces. This ensures that all objects are visible against the new background color. `whitebg` sets the default properties on the root such that all subsequent figures use the new background color.

See Also

`ColorSpec` | `colordef`

Introduced before R2006a

who

List variables in workspace

Syntax

```
who
who -file filename
who global
who ___ variables
C = who( ___ )
```

Description

`who` lists in alphabetical order the names of all variables in the currently active workspace.

`who -file filename` lists the variable names in the specified MAT-file.

`who global` lists the variable names in the global workspace.

`who ___ variables` lists only the specified variables. You can specify `variables` with any of the arguments in the previous syntaxes.

`C = who( ___ )` stores the names of the variables in the cell array `C`.

Note: You must use the functional form of `who` when there is an output argument.

Examples

Display Workspace Variable Names

List the names of variables in the current workspace that start with the letter `a`.

```
who a*
```

Display the names of variables in the current workspace that end with `ion`.

```
who -regexp ion$
```

List Names of Variables in a MAT-File

List the names of variables stored in the sample MAT-file `durer.mat`.

```
who -file durer.mat
```

```
Your variables are:

X        caption  map
```

Store Variable List in Cell Array

Store the list of variable names in `durer.mat` in cell array `C`.

```
C = who('-file','durer.mat');
```

Display the contents of `C`.

```
for k=1:length(C)
   disp(C{k})
end
```

```
X

caption

map
```

List Workspace Variables Within Nested or Anonymous Function

List all the variable names in the current workspace while paused in a nested function.

Create a file `who_demo.m`, that contains these statements.

```
function who_demo
date_time = datestr(now);

date_time_array = strsplit(date_time,{'-',''});
get_date(date_time_array);

   function get_date(d)
      day = d{1};
```

```
        mon = d{2};
        year = d{3};
        keyboard
    end

end
```

```
K>>
```

Run `who_demo`. MATLAB pauses at the line with the `keyboard` command.

```
who_demo
```

Call the `who` function. MATLAB displays the names of the variables in the nested `get_date` function and in all functions containing the nested function.

```
K>> who
```

```
Your variables are:

d                   mon                 date_time
day                 year                date_time_array
```

Input Arguments

`variables` — Variables to display

character vectors

Variables to display, specified as one or more character vectors in one of these forms.

Form of `Variables` Input	Variable Names
`var1 ... varN`	List the variable names, specified as individual character vectors. Use the `'*'` wildcard to match patterns. For example, `who A*` lists the names of all the variables in the workspace that start with `A`.
`-regexp` *`expr1 ... exprN`*	List only the variable names that match the regular expressions, specified as character vectors. For example, `who -regexp ^Mon ^Tues` lists only the variables names in the workspace that begin with `Mon` or `Tues`.

`filename` — Name of MAT-file

character vector

Name of MAT-file, specified as a character vector. The file name can include the full, relative, or partial path. For example, `who -file myFile.mat` lists the names of all variables in the MAT-file named `myFile.mat`.

Output Arguments

`C` — List of variables

cell array of character vector

List of variables, specified as a cell array of character vector.

Alternatives

- To view the variables in the workspace, use the Workspace browser. To view the contents of MAT-files, use the Details Panel of the Current Folder browser.

See Also

See Also

`assignin` | `clear` | `clearvars` | `exist` | `inmem` | `load` | `save` | `what` | `workspace`

Topics

"Create and Edit Variables"

Introduced before R2006a

who

Class: matlab.io.MatFile
Package: matlab.io

Names of variables in MAT-file

Syntax

```
varlist = who(matObj)
varlist = who(matObj,variables)
```

Description

`varlist = who(matObj)` lists alphabetically all variables in the MAT-file associated with `matObj`. Optionally, returns the list in cell array `varlist`.

`varlist = who(matObj,variables)` lists the specified variables.

Input Arguments

matObj

Object created by the `matfile` function.

variables

Names of variables in the MAT-file corresponding to `matObj`. Use one of these forms:

`var1,...,varN`	Comma-separated list of variable name strings. Optionally, match patterns with the `'*'` wildcard, such as `who(matobj,'A*')`.
`'-regexp',expressions`	Regular expression strings that describe variable names.

Output Arguments

varlist

Cell array of strings that correspond to each variable name.

Examples

Display a list of variables in the example file `topography.mat`:

```
matObj = matfile('topography.mat');
who(matObj)
```

This code returns:

```
Your variables are:

topo        topolegend  topomap1    topomap2
```

See Also

whos | `matfile`

whos

List variables in workspace, with sizes and types

Syntax

```
whos
whos -file filename
whos global
whos ___ variables
S = whos( ___ )
```

Description

`whos` lists in alphabetical order the names, sizes, and types of all variables in the currently active workspace.

`whos -file filename` lists variables in the specified MAT-file.

`whos global` lists variables in the global workspace.

`whos ___ variables` lists only the specified variables. You can specify `variables` with any of the arguments in the previous syntaxes.

`S = whos( ___ )` stores information about the variables in the structure array `S`.

Note: You must use the functional form of `whos` when there is an output argument.

Examples

Display Workspace Variable Information

Display information about specific variables in the current workspace. For example, list information about variables with names that start with the letter `a`.

```
whos a*
```

Now, list information about variables with names that end with `ion`.

```
whos -regexp ion$
```

Display Information on Variables Stored in a MAT-File

Display all the information on the variables stored in the sample MAT-file `durer.mat`.

```
whos -file durer.mat
```

```
  Name           Size                Bytes  Class     Attributes

  X            648x509            2638656  double
  caption        2x28                 112  char
  map          128x3                 3072  double
```

Store Variable Information in a Structure Array

Store information about the variables in `durer.mat` in structure array `S`.

```
S = whos('-file','durer.mat');
```

Display the contents of `S`.

```
for k = 1:length(S)
   disp(['   ' S(k).name ...
         '   ' mat2str(S(k).size) ...
         '   ' S(k).class]);
end
```

```
  X  [648 509]  double

  caption  [2 28]  char

  map  [128 3]  double
```

Display Variable Attribute Information

Create variables with various attributes, and then display information about them.

Create a file, `show_attributes.m`, that contains these statements.

```
function show_attributes
persistent p;
global g;
p = 1;
g = 2;
s = sparse(eye(5));
c = [4+5i 9-3i 7+6i];
whos
```

Call `show_attributes`. When MATLAB® executes the `whos` command at the end of `show_attributes`, it lists each variable and its corresponding attribute.

```
show_attributes
```

```
  Name      Size            Bytes  Class     Attributes

  c         1x3                48  double    complex
  g         1x1                 8  double    global
  p         1x1                 8  double    persistent
  s         5x5               128  double    sparse
```

List Workspace Variables Within Nested or Anonymous Function

List all the variables in the current workspace while paused in a nested function.

Create a file, `whos_demo.m`, that contains these statements.

```
function whos_demo
date_time = datestr(now);

date_time_array = strsplit(date_time,{'-',''});
get_date(date_time_array);

   function get_date(d)
      day = d{1};
      mon = d{2};
      year = d{3};
      keyboard
   end

end
```

Run `whos_demo`. MATLAB pauses at the line with the `keyboard` command.

```
whos_demo
```

```
K>>
```

Call the `whos` function. MATLAB displays the variables in the nested `get_date` function, and the variables in all functions that contain the nested function, grouped by function workspace.

```
K>> whos
```

```
Name                 Size            Bytes  Class    Attributes

  ---- whos_demo/get_date ----------------------------------------
  d                    1x3               372  cell
  day                  1x2                 4  char
  mon                  1x3                 6  char
  year                 1x13               26  char

  ---- whos_demo -------------------------------------------------
  date_time            1x20               40  char
  date_time_array      1x3               372  cell
```

Input Arguments

`variables` — Variables to display

character vectors

Variables to display, specified as one or more character vectors in one of the following forms.

Form of `Variables` Input	Variable Names
`var1 ... varN`	List the named variables, specified as individual character vectors. Use the `'*'` wildcard to match patterns. For example, `whos A*` lists all variables in the workspace that start with `A`.
`-regexp` *`expr1 ... exprN`*	List only the variables that match the regular expressions, specified as character vectors. For example, `whos -regexp ^Mon ^Tues` lists only the variables in the workspace that begin with `Mon` or `Tues`.

`filename` — Name of MAT-file

character vector

Name of MAT-file, specified as a character vector. The file name can include the full, relative, or partial path. For example, `whos -file myFile.mat` lists all variables in the MAT-file named `myFile.mat`. The `whos -file filename` command does not return the sizes of any MATLAB objects in file `filename`.

Output Arguments

`S` — Variable information

nested structure array

Variable information, returned as a nested structure array containing a scalar `struct` for each variable. Each scalar `struct` contains these fields.

Field	Description
`name`	Name of the variable.
`size`	Dimensions of the variable array.
`bytes`	Number of bytes allocated for the variable array. `whos` returns the number of bytes each variable occupies in the workspace, which is not necessarily the same as the number of bytes each variable occupies in a MAT-file. MAT-files Version 7 and later are compressed, so the number of bytes required in the workspace is typically larger than the number of bytes in the file. `whos` does not report the number of bytes consumed by handle objects. If a variable contains handle objects, the number of bytes that the `whos` function displays for the variable might be smaller than expected.
`class`	Class of the variable. If the variable has no value, class is `'(unassigned)'`.
`global`	`true` if the variable is global.
`sparse`	`true` if the variable is sparse.
`complex`	`true` if the variable is complex.

Field	Description
`nesting`	Structure with these fields: • `function` — Name of the nested or outer function that defines the variable. • `level` — Nesting level of that function.
`persistent`	`true` if the variable is persistent.

Alternatives

- You also can view the contents of MAT-files using the Details Panel of the Current Folder browser.

See Also

See Also

`clear` | `exist` | `what` | `who`

Topics

"Create and Edit Variables"

Introduced before R2006a

whos

Class: matlab.io.MatFile
Package: matlab.io

Names, sizes, and types of variables in MAT-file

Syntax

```
details = whos(matObj)
details = whos(matObj,variables)
```

Description

`details = whos(matObj)` returns information about all variables in the MAT-file associated with `matObj`.

`details = whos(matObj,variables)` returns information about the specified variables.

Input Arguments

matObj

Object created by the `matfile` function.

variables

Names of variables in the MAT-file corresponding to `matObj`. Use one of these forms:

`var1,...,varN`	Comma-separated list of variable name strings. Optionally, match patterns with the `'*'` wildcard, such as `whos(matobj,'A*')`.
`'-regexp',expressions`	Regular expression strings that describe variable names.

Output Arguments

details

Structure array with these fields (identical to the structure returned by the `whos` function):

`name`	Variable name
`size`	Dimensions of the variable
`bytes`	Number of bytes allocated for the array when you load the entire variable
`class`	Class (data type) of the variable
`global`	Whether the variable is global (`true` or `false`)
`sparse`	Whether the variable is sparse
`complex`	Whether the variable is complex
`nesting`	Structure with these fields: • `function` — Name of the nested or outer function that defines the variable • `level` — Nesting level
`persistent`	Whether the variable is persistent

Examples

Display a list of variables in the example file `topography.mat`:

```
matObj = matfile('topography.mat');
whos(matObj)
```

This code returns:

```
  Name              Size              Bytes  Class     Attributes

  topo            180x360            518400  double
  topolegend        1x3                  24  double
  topomap1         64x3                1536  double
  topomap2        128x3                3072  double
```

Without loading any data, find the size and number of dimensions of the variable `topo` in `topography.mat`:

```
matObj = matfile('topography.mat');
info = whos(matObj,'topo');
sizeX = info.size
nDimsX = length(sizeX)
```

This code returns:

```
sizeX =
   180   360

nDimsX =
     2
```

See Also

size | `matfile`

width

Number of table variables

Syntax

```
W = width(T)
```

Description

`W = width(T)` returns the number of variables in table `T`.

`width(T)` is equivalent to `size(T,2)`.

Examples

Number of Variables in Table

Create a table, `T`.

```
LastName = {'Smith';'Johnson';'Williams';'Jones';'Brown'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];

T = table(Age,Height,Weight,BloodPressure,'RowNames',LastName)
```

```
T = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Smith       38     71        176       124      93
    Johnson     43     69        163       109      77
    Williams    38     64        131       125      83
    Jones       40     67        133       117      75
    Brown       49     64        119       122      80
```

Find the number of variables in table `T`.

```
W = width(T)
```

```
W = 4
```

`T` contains `4` variables; `width` does not count the row names.

The variable `BloodPressure` counts as one variable even though it contains two columns.

Input Arguments

`T` — Input table

table

Input table, specified as a table.

Variables in a table can have multiple columns, but `width(T)` only counts the number of variables.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`height` | `numel` | `size`

Introduced in R2013b

wilkinson

Wilkinson's eigenvalue test matrix

Syntax

```
W = wilkinson(n)
```

Description

`W = wilkinson(n)` returns one of J. H. Wilkinson's eigenvalue test matrices. It is a symmetric, tridiagonal matrix with pairs of nearly, but not exactly, equal eigenvalues.

Examples

Wilkinson Test Matrix

Compute a 7-by-7 Wilkinson eigenvalue test matrix. The most frequently used case is `wilkinson(21)`, whose two largest eigenvalues are approximately 10.746; they agree to 14, but not 15, decimal places.

```
W = wilkinson(7)
```

```
W =

     3     1     0     0     0     0     0
     1     2     1     0     0     0     0
     0     1     1     1     0     0     0
     0     0     1     0     1     0     0
     0     0     0     1     1     1     0
     0     0     0     0     1     2     1
     0     0     0     0     0     1     3
```

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

- `n` must be a fixed-size scalar.

See Also

`pascal` | `eig` | `gallery`

Introduced before R2006a

winopen

Open file in appropriate application (Windows)

Syntax

```
winopen name
```

Description

`winopen name` opens the specified file in the Microsoft Windows application associated with the extension of the file. `winopen` uses a Windows shell command, and performs the same action as double-clicking the file in Windows Explorer.

Examples

Open a File in Microsoft® Word®

Open the file `thesis.docx` in Microsoft Word.

```
winopen thesis.docx
```

Open File in System Web Browser

Open the file `my_sine_wave.html` in the system Web browser.

```
winopen my_sine_wave.html
```

Open the Current Folder in Windows Explorer Tool

Open the current folder in the Windows Explorer tool.

```
winopen(cd)
```

Input Arguments

`name` — Name of file to open

character vector

Name of file to open, specified as a character vector. `name` can be an absolute or relative path.

See Also

See Also

`dos` | `open` | `web`

Introduced before R2006a

winqueryreg

Item from Windows registry

Syntax

```
valnames = winqueryreg('name','rootkey','subkey')
value = winqueryreg('rootkey','subkey','valname')
value = winqueryreg('rootkey','subkey')
```

Description

`valnames = winqueryreg('name','rootkey','subkey')` returns all value names in `rootkey\subkey` of Microsoft Windows operating system registry to a cell array of character vectors. The first argument is the literal quoted string, `'name'`.

`value = winqueryreg('rootkey','subkey','valname')` returns the value for `valname` in `rootkey\subkey`.

If the value retrieved from the registry is a string, `winqueryreg` returns a character vector. If the value is a 32-bit integer, `winqueryreg` returns the value as an integer of the MATLAB type `int32`.

`value = winqueryreg('rootkey','subkey')` returns a value in `rootkey\subkey` that has no value name property.

Note The literal **`name`** argument and the `rootkey` argument are case-sensitive. The `subkey` and `valname` arguments are not.

Examples

Example 1

Get the value of `CLSID` for the MATLAB sample Microsoft COM control `mwsampctrl.2`:

```
winqueryreg 'HKEY_CLASSES_ROOT' 'mwsamp.mwsampctrl.2\clsid'
```

```
ans =
   {5771A80A-2294-4CAC-A75B-157DCDDD3653}
```

Example 2

Get a list in variable `mousechar` for registry subkey `Mouse`, which is under subkey `Control Panel`, which is under root key `HKEY_CURRENT_USER`.

```
mousechar = winqueryreg('name','HKEY_CURRENT_USER','control panel\mouse');
```

For each name in the `mousechar` list, get its value from the registry and then display the name and its value:

```
for k = 1:length(mousechar)
   setting = winqueryreg('HKEY_CURRENT_USER','control panel\mouse', mousechar{k});
   str = sprintf('%s = %s',mousechar{k},num2str(setting));
   disp(str)
end
```

```
ActiveWindowTracking = 0
DoubleClickHeight = 4
DoubleClickSpeed = 830
DoubleClickWidth = 4
MouseSpeed = 1
MouseThreshold1 = 6
MouseThreshold2 = 10
SnapToDefaultButton = 0
SwapMouseButtons = 0
```

Tips

This function works only for the following registry value types:

- strings (REG_SZ)
- expanded strings (REG_EXPAND_SZ)
- 32-bit integer (REG_DWORD)

Introduced before R2006a

winter

Winter colormap array

Syntax

```
c = winter
c = winter(m)
```

Description

`c = winter` returns the winter colormap as a three-column array with the same number of rows as the colormap for the current figure. If no figure exists, then the number of rows is equal to the default length of 64. Each row in the array contains the red, green, and blue intensities for a specific color. The intensities are in the range [0,1], and the color scheme looks like this image.

`c = winter(m)` returns the colormap with `m` colors.

Examples

Reverse the Colormap

Plot a surface and assign the winter colormap.

```
surf(peaks);
colormap('winter');
```

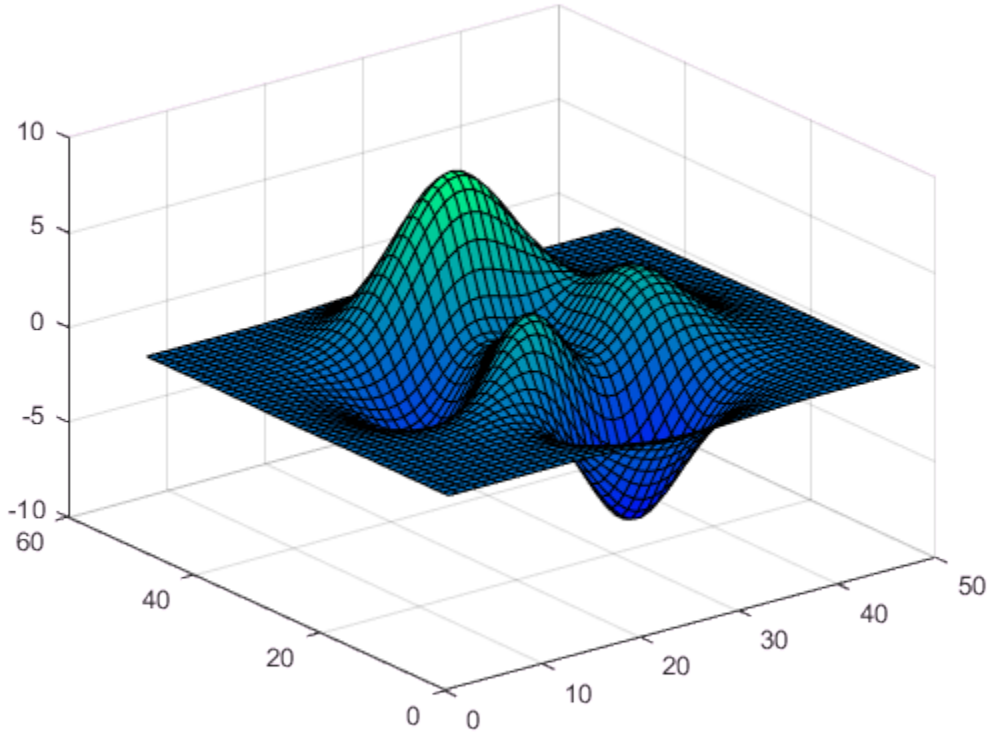

Get the winter colormap array and reverse the order. Then apply the modified colormap to the surface.

```
c = winter;
c = flipud(c);
colormap(c);
```

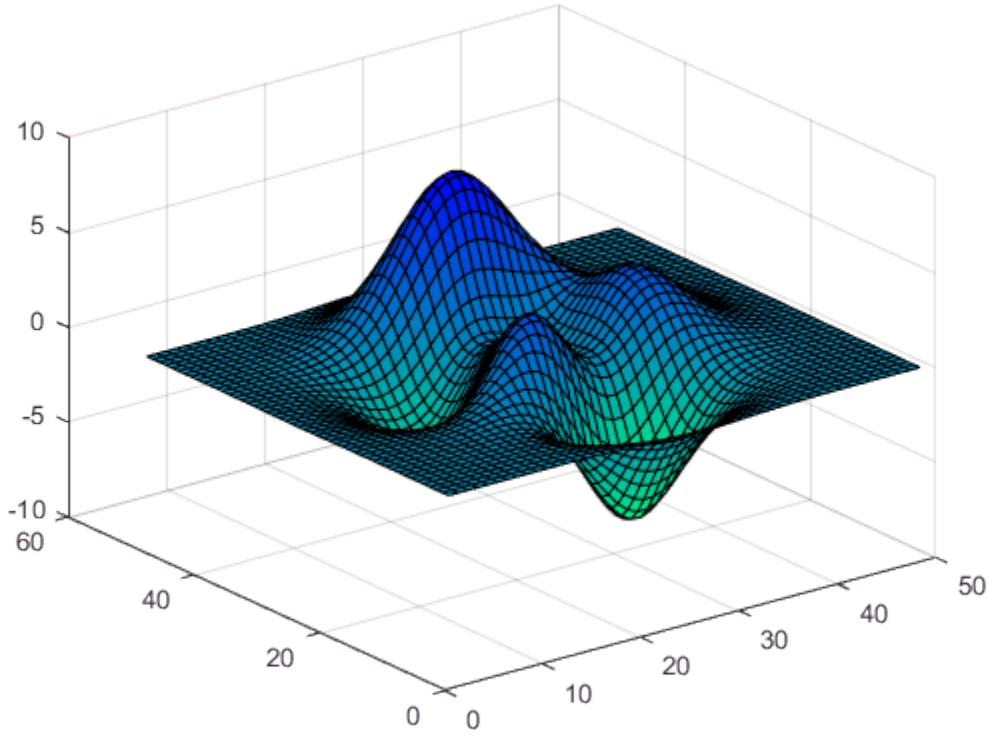

Downsample the Winter Colormap

Get a downsampled version of the winter colormap containing only ten colors. Then display the contours of the peaks function by applying the colormap and interpolated shading.

```
c = winter(10);
surf(peaks);
colormap(c);
shading interp;
```

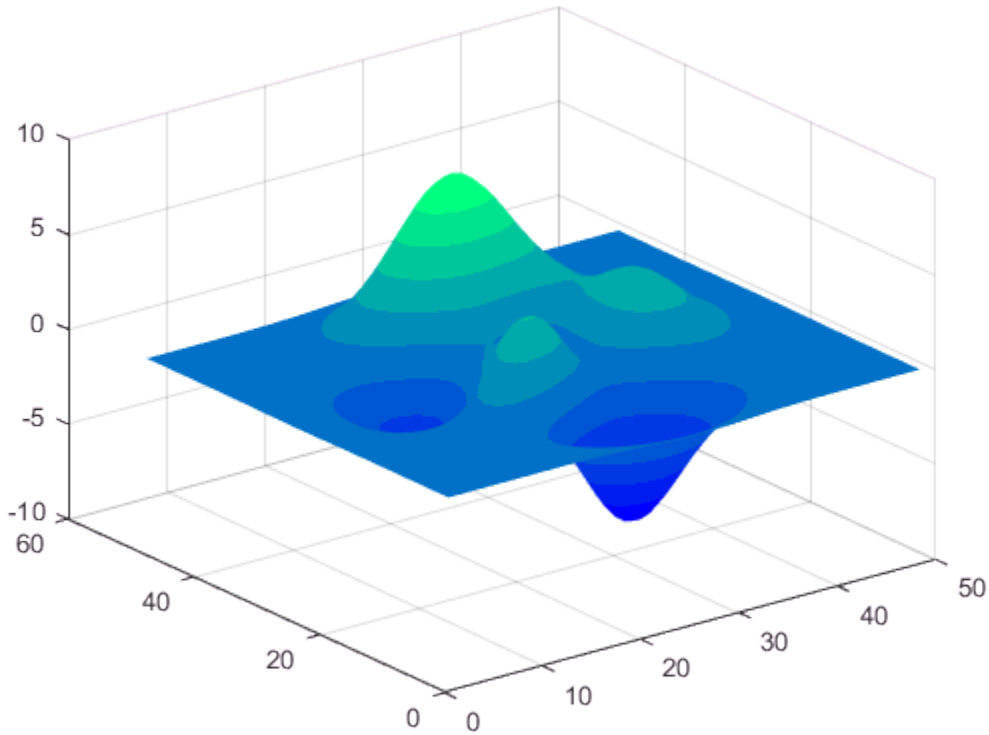

- "Change Color Scheme Using a Colormap"

Input Arguments

m — Number of entries

64 (default) | scalar integer value

Number of entries, specified as a scalar integer value. The default value of m is equal to the length of the colormap for the current figure. If no figure exists, the default value is 64.

Data Types: `single` | `double`

See Also

See Also

`colormap`

Topics

"Change Color Scheme Using a Colormap"

Introduced before R2006a

withtol

Time tolerance for timetable row subscripting

Syntax

```
S = withtol(rowTimes,tol)
```

Description

`S = withtol(rowTimes,tol)` creates a subscript to select rows of a timetable. `S` selects all rows whose row times match a time in `rowTimes` within the tolerance specified by `tol`. The `rowTimes` argument is a datetime or duration array, or a cell array of character vectors that specify dates and times. `tol` must be a duration value.

If `rowTimes` contains datetime values, then you can only use `S` to subscript into a timetable whose row times are datetime values. Similarly, if `rowTimes` contains duration values, then you can only use `S` to subscript into a timetable whose row times are duration values.

Examples

Specify Tolerance to Match Row Times

Create a timetable that contains temperature and pressure data with row times in hours. There is a slight random variance in the row times. Select rows with row times that match corresponding times in a time vector within a tolerance of five seconds.

```
Time = datetime(2015,12,18) + hours(1:10)' + seconds(randn(10,1));
Temp = [37.3 39.1 42.3 42.6 43 43.9 44.1 43.3 42.5 42]';
Pressure = [29.4 29.6 30.0 30.0 30.1 29.9 29.9 29.8 29.6 29.7]';
TT = timetable(Time,Temp,Pressure)
```

```
TT = 10×2 timetable
            Time            Temp    Pressure
    ____________________    ____    ________

    18-Dec-2015 01:00:00    37.3    29.4
```

```
    18-Dec-2015 02:00:01    39.1    29.6
    18-Dec-2015 02:59:57    42.3      30
    18-Dec-2015 04:00:00    42.6      30
    18-Dec-2015 05:00:00      43    30.1
    18-Dec-2015 05:59:58    43.9    29.9
    18-Dec-2015 06:59:59    44.1    29.9
    18-Dec-2015 08:00:00    43.3    29.8
    18-Dec-2015 09:00:03    42.5    29.6
    18-Dec-2015 10:00:02      42    29.7
```

Create a time vector spanning the hours from 3:00 to 8:00.

```
newTimes = datetime(2015,12,18) + hours(3:8)
```

```
newTimes = 1×6 datetime array
   18-Dec-2015 03:00:00   18-Dec-2015 04:00:00   18-Dec-2015 05:00:00   18-Dec-2015 06
```

Select rows of `TT` with row times that match times in `newTimes` within five seconds.

```
S = withtol(newTimes,seconds(5));
TT2 = TT(S,:)
```

```
TT2 = 6×2 timetable
            Time            Temp    Pressure
    ____________________    ____    ________

    18-Dec-2015 02:59:57    42.3      30
    18-Dec-2015 04:00:00    42.6      30
    18-Dec-2015 05:00:00      43    30.1
    18-Dec-2015 05:59:58    43.9    29.9
    18-Dec-2015 06:59:59    44.1    29.9
    18-Dec-2015 08:00:00    43.3    29.8
```

- "Create Timetables"
- "Select Timetable Data by Row Time and Variable Type"

Input Arguments

`rowTimes` — Times to match in timetable

datetime array | duration array | cell array of character vectors

Times to match in a timetable, specified as a datetime array or a duration array. `rowTimes` contains times that do not exactly match times in the row times of a timetable, but that might be within a specified tolerance.

If `rowTimes` is a cell array of character vectors, then the character vectors specify dates and times that the `datetime` function can convert into datetime values.

`tol` — Tolerance for matching times to row times of timetable
duration

Tolerance for matching times to the row times of a timetable, specified as a duration.

See Also

See Also
`retime` | `synchronize` | `timerange` | `vartype`

Topics
"Create Timetables"
"Select Timetable Data by Row Time and Variable Type"
"Tables"
"Represent Dates and Times in MATLAB"

Introduced in R2016b

workspace

Open Workspace browser to manage workspace

Syntax

```
workspace
```

Description

`workspace` displays the Workspace browser, a graphical user interface that allows you to view and manage the contents of the workspace in MATLAB. It provides a graphical representation of the `whos` display, and allows you to perform the equivalent of the `clear`, `load`, `open`, and `save` functions.

The Workspace browser also displays and automatically updates statistical calculations for each variable, which you can choose to show or hide.

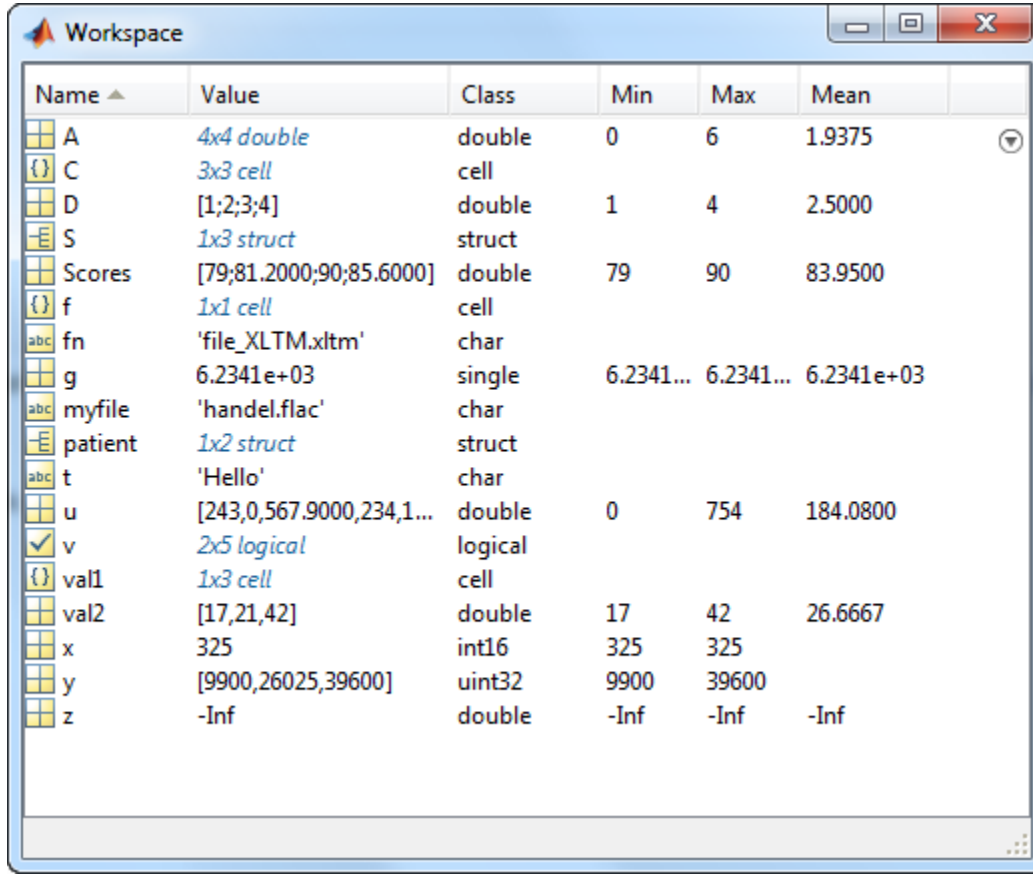

Workspace

Name	Value	Class	Min	Max	Mean
A	4x4 double	double	0	6	1.9375
C	3x3 cell	cell			
D	[1;2;3;4]	double	1	4	2.5000
S	1x3 struct	struct			
Scores	[79;81.2000;90;85.6000]	double	79	90	83.9500
f	1x1 cell	cell			
fn	'file_XLTM.xltm'	char			
g	6.2341e+03	single	6.2341...	6.2341...	6.2341e+03
myfile	'handel.flac'	char			
patient	1x2 struct	struct			
t	'Hello'	char			
u	[243,0,567.9000,234,1...	double	0	754	184.0800
v	2x5 logical	logical			
val1	1x3 cell	cell			
val2	[17,21,42]	double	17	42	26.6667
x	325	int16	325	325	
y	[9900,26025,39600]	uint32	9900	39600	
z	-Inf	double	-Inf	-Inf	-Inf

You can edit a value directly in the Workspace browser for small numeric and character arrays. To see and edit a graphical representation of larger variables and for other classes, double-click the variable in the Workspace browser. The variable displays in the Variables editor, where you can view the full contents and make changes.

See Also

`openvar` | `who` | `filebrowser` | `commandhistory` | `commandwindow`

Topics

"Create and Edit Variables"

"Use MATLAB Engine Workspace in Python"

Introduced before R2006a

write

Write tall array to disk for checkpointing

Syntax

```
write(location,tA)
```

Description

`write(location,tA)` calculates the values in tall array `tA` and then writes the array to files in the folder specified by `location`. The data is stored in an efficient binary format suitable for reading back using `datastore(location)`.

Examples

Write and Reconstruct Tall Array

Write a tall array to disk, then subsequently recover the tall array by creating a new datastore for the written files. This process is useful to save your work or share a tall array with a colleague.

Create a datastore for the `airlinesmall.csv` data set. Select only the `Year`, `Month`, and `UniqueCarrier` variables, and treat `'NA'` values as missing data. Convert the datastore into a tall table.

```
ds = datastore('airlinesmall.csv');
ds.TreatAsMissing = 'NA';
ds.SelectedVariableNames = {'Month','Year','UniqueCarrier'};
tt = tall(ds)
```

```
tt =

  M×3 tall table
```

```
    Month    Year    UniqueCarrier
    _____    ____    _____________

    10       1987    'PS'
    10       1987    'PS'
    10       1987    'PS'
    10       1987    'PS'
    10       1987    'PS'
    10       1987    'PS'
    10       1987    'PS'
    10       1987    'PS'
    :        :       :
    :        :       :
```

Sort the data in descending order by year and extract the top 25 rows. The resulting tall table is unevaluated.

```
tt_new = topkrows(tt,25,'Year')
```

```
tt_new =

  M×3 tall table

    Month    Year    UniqueCarrier
    _____    ____    _____________

    ?        ?       ?
    ?        ?       ?
    ?        ?       ?
    :        :       :
    :        :       :
```

Save the results to a new folder named `ExampleData` on the `C:\` disk. (You might want to specify a different write location, especially if you are not using a Windows® computer.) The `write` function evaluates the tall array prior to writing the files, so there is no need to use the `gather` function prior to saving the data.

```
location = 'C:\ExampleData';
write(location,tt_new)
```

```
Writing tall data to folder C:\ExampleData
Evaluating tall expression using the Local MATLAB Session:
```

```
- Pass 1 of 1: Completed in 0 sec
Evaluation completed in 0 sec
```

Clear `tt` and `ds` from your working directory. To recover the tall table that was written to disk, first create a new datastore that references the same directory. Then convert the datastore into a tall table. Since the tall table was evaluated before being written to disk, the display now includes a preview of the values.

```
clear tt ds
ds2 = datastore(location);
tt2 = tall(ds2)
```

```
tt2 =

  M×3 tall table

    Month    Year    UniqueCarrier
    _____    ____    _____________

    1        2008    'WN'
    1        2008    'WN'
    1        2008    'WN'
    1        2008    'WN'
    1        2008    'WN'
    1        2008    'WN'
    1        2008    'WN'
    1        2008    'WN'
    :        :       :
    :        :       :
```

Input Arguments

`location` — Folder location to write data

character vector | string

Folder location to write data, specified as a character vector or string. `location` can specify a full or relative path. The specified folder can be either of these options:

- Existing empty folder that contains no other files
- New folder that `write` creates

Additional considerations apply for Hadoop and Apache Spark™:

- If the folder is not available locally, then the full path of the folder must be an internationalized resource identifier (IRI) of the form: `hdfs://hostname:portnumber/path_to_file`.
- Before writing to HDFS, set the `HADOOP_HOME`, `HADOOP_PREFIX`, or `MATLAB_HADOOP_INSTALL` environment variable to the folder where Hadoop is installed.
- Before writing to Apache Spark, set the `SPARK_HOME` environment variable to the folder where Apache Spark is installed.

Example: `location = 'hdfs://myHadoopCluster/some/output/folder'`

Example: `location = '../../dir/data'`

Example: `location = 'C:\Users\MyName\Desktop'`

Data Types: `char` | `string`

`tA` — Input array
tall array

Input array, specified as a tall array.

Tips

- Use the `write` function to create *checkpoints* or *snapshots* of your data as you work, especially when working with huge data sets. This practice allows you to reconstruct tall arrays directly from files on disk rather than reexecuting all of the commands that produced the tall array.

See Also

See Also
`datastore` | `tall`

Topics
"Tall Arrays"

Introduced in R2016b

write

Write data to remote host over TCP/IP

Syntax

```
write(t,data)
```

Description

`write(t,data)` sends the N-dimensional matrix of data from `tcpclient` object `t` connected to the remote host. The function waits until the specified values are written to the remote host.

Examples

Read and Write uint8 Data

Create a TCP/IP object called `t`, connecting to a TCP/IP echo server, with Port of `7`. This requires you to have an `echotcpip` server running on Port 7.

```
t = tcpclient('localhost', 7)
```

```
t = 

   tcpclient with properties:

           Address: 'local host'
              Port: 7
           Timeout: 10
   BytesAvailable: 0
```

The `write` function synchronously writes data to the remote host connected to the `tcpclient` object. First specify the data, then write the data. The function waits until the specified number of values is written to the remote host.

Assign 10 bytes of `uint8` data to the variable `data`.

```
data = uint8(1:10)
```

```
data =

  1     2     3     4     5     6     7     8     9    10
```

Check the data.

```
whos data
```

```
Name      Size      Bytes     Class     Attributes

data      1x10         10     uint8
```

Write data to the echo server.

```
write(t, data)
```

Check that the data was written using the `BytesAvailable` property.

```
t.BytesAvailable
```

```
ans =

    10
```

Read the data from the server.

```
read(t)
```

```
ans =

  1     2     3     4     5     6     7     8     9    10
```

Close the connection between the TCP/IP client object and the remote host by clearing the object.

```
clear t
```

- "Create a TCP/IP Connection"
- "Configure Properties for TCP/IP Communication"
- "Write and Read Data over TCP/IP Interface"

Input Arguments

`data` — Data to write to the remote host

1xN matrix of numeric data

Data to write to the remote host, specified as a 1xN matrix of numeric data.

Example: `write(t, data)`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

See Also

Topics

"Create a TCP/IP Connection"
"Configure Properties for TCP/IP Communication"
"Write and Read Data over TCP/IP Interface"

Introduced in R2014b

writetable

Write table to file

Syntax

```
writetable(T)
writetable(T,filename)
writetable( ___ ,Name,Value)
```

Description

`writetable(T)` writes table `T` to a comma delimited text file. The file name is the workspace variable name of the table, appended with the extension `.txt`. If `writetable` cannot construct the file name from the input table name, then it writes to the file `table.txt`.

Each column of each variable in `T` becomes a column in the output file. The variable names of `T` become column headings in the first line of the file.

`writetable(T,filename)` writes to a file with the name and extension specified by `filename`.

`writetable` determines the file format based on the specified extension. The extension must be one of the following:

- `.txt`, `.dat`, or `.csv` for delimited text files
- `.xls`, `.xlsm`, or `.xlsx` for Excel spreadsheet files
- `.xlsb` for Excel spreadsheet files supported on systems with Excel for Windows

`writetable( ___ ,Name,Value)` writes the table to a file with additional options specified by one or more `Name,Value` pair arguments and can include any of the input arguments in previous syntaxes.

For example, you can specify whether to write the variable names as column headings in the output file.

Examples

Write Table to Text File

Create a table.

```
T = table(['M';'F';'M'],[45 45;41 32;40 34],...
    {'NY';'CA';'MA'},[true;false;false])
```

```
T = 3×4 table
    Var1      Var2      Var3    Var4
    ____    ________    ____    _____

    M       45    45    'NY'    true
    F       41    32    'CA'    false
    M       40    34    'MA'    false
```

Write the table to a comma delimited text file and display the file contents.

```
writetable(T)
```

`writetable` outputs a text file named `T.txt`.

```
type 'T.txt'
```

```
Var1,Var2_1,Var2_2,Var3,Var4
M,45,45,NY,1
F,41,32,CA,0
M,40,34,MA,0
```

`writetable` appends a unique suffix to the variable name, `Var2`, above the two columns of corresponding data.

Write Table to Space-Delimited Text File

Create a table.

```
T = table(['M';'F';'M'],[45 45;41 32;40 34],...
    {'NY';'CA';'MA'},[true;false;false])
```

```
T = 3×4 table
```

```
    Var1       Var2       Var3    Var4
    ____    ________    ____    _____

    M       45    45    'NY'    true
    F       41    32    'CA'    false
    M       40    34    'MA'    false
```

Write the table to a space-delimited text file named `myData.txt` and display the file contents.

```
writetable(T,'myData.txt','Delimiter',' ')
type 'myData.txt'
```

```
Var1 Var2_1 Var2_2 Var3 Var4
M 45 45 NY 1
F 41 32 CA 0
M 40 34 MA 0
```

`writetable` appends a unique suffix to the variable name, `Var2`, above the two columns of corresponding data.

Write Table to Text File Including Row Names

Create a table.

```
LastName = {'Smith';'Johnson';'Williams';'Jones';'Brown'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
BloodPressure = [124 93; 109 77; 125 83; 117 75; 122 80];

T = table(Age,Height,Weight,BloodPressure,...
    'RowNames',LastName)
```

```
T = 5×4 table
                Age    Height    Weight    BloodPressure
                ___    ______    ______    _____________

    Smith       38     71        176       124      93
    Johnson     43     69        163       109      77
    Williams    38     64        131       125      83
    Jones       40     67        133       117      75
```

```
    Brown        49      64         119        122      80
```

Write the table, `T`, to a comma delimited text file, called `myPatientData.dat`, and display the file contents.

```
writetable(T,'myPatientData.dat','WriteRowNames',true)
type 'myPatientData.dat'
```

```
Row,Age,Height,Weight,BloodPressure_1,BloodPressure_2
Smith,38,71,176,124,93
Johnson,43,69,163,109,77
Williams,38,64,131,125,83
Jones,40,67,133,117,75
Brown,49,64,119,122,80
```

The first column, which contains the row names, has the column heading, `Row`. This is the first dimension name for the table from the property `T.Properties.DimensionNames`.

Write Foreign-Language Dates to Text File

Convert English dates in a table to German and write the table to file.

Create a table that contains a `datetime` array with dates in English. Create column vectors of numeric data to go with the dates.

```
D = datetime({'01-Jan-2014';'01-Feb-2014';'01-Mar-2014'});
D.Format = 'dd MMMM yyyy';
X1 = [20.2;21.6;20.7];
X2 = [100.5;102.7;99.8];
T = table(D,X1,X2)
```

```
T =

           D              X1      X2
    ________________      ____    _____

    01 January 2014       20.2    100.5
    01 February 2014      21.6    102.7
    01 March 2014         20.7     99.8
```

Write the table to a text file. Specify German for the locale of the dates using the `DateLocale` name-value pair argument, and display the dates in the text file.

```
writetable(T,'myfile.txt','DateLocale','de_DE');
type myfile.txt
```

```
D,X1,X2
01 Januar 2014,20.2,100.5
01 Februar 2014,21.6,102.7
01 März 2014,20.7,99.8
```

Write Foreign-Language Characters to Text Files

When your data contains foreign-language or non-ASCII characters use the encoding parameter to ensure the file is written correctly. First, load the provided table into the workspace. Then, write the table to a file using the default encoding. Finally, write the table using `'UTF-8'` encoding and examine the result.

Load `Table_Japanese_Characters.mat` which contains a table T. A preview of the table is shown below. Notice that the table contains two columns with Japanese characters.

T

9x3 table

	1 A	2 B	3 C
1	"南西"	458.9772	"冬の嵐"
2	"南東"	530.1399	"冬の嵐"
3	"南東"	289.4035	"冬の嵐"
4	"西"	434.8054	"機器の故障"
5	"中西部"	186.4368	"深刻な嵐"
6	"西"	0	"攻撃"
7	"西"	231.2947	"機器の故障"
8	"西"	311.8607	"機器の故障"
9	"北東"	239.9328	"火災"

```
load('Table_Japanese_Characters.mat')
```

Write the table to a file. The `writetable` function uses your system default encoding when writing files. Results may differ based on your system settings. To examine the resulting file, read the table back into the workspace by using the `readtable` function. Notice that `writetable` did not succeed in writing columns (1 and 3) containing foreign-lanaguage characters.

```
writetable(T,'myTable.txt')
myTable = readtable('myTable.txt')
```

```
myTable =

  9×3 table array

      A        B          C
    _____    ______    _______

    '  '     458.98    '   '
    '  '     530.14    '   '
    '  '      289.4    '   '
    ' '      434.81    '     '
    '   '    186.44    '    '
    ' '           0    '  '
    ' '      231.29    '     '
    ' '      311.86    '     '
    '  '     239.93    '  '
```

If your table contains foreign-language or non-ASCII characters, use the `'Encoding'` parameter to ensure your data is written correctly. Set `'Encoding'` to `'UTF-8'` which supports a wide range of foreign-language and non-ASCII characters. To examine the resulting file, read the table back into the workspace by using the `readtable` function. Notice that this time the `writetable` function was successful in writing the data.

```
writetable(T,'myTable_UTF8.txt','Encoding','UTF-8')
myTable_UTF8 = readtable('myTable_UTF8.txt','Encoding','UTF-8')
```

```
myTable_UTF8 =

  9×3 table array

      A        B          C
    _____    ______    _______
```

```
    '##'      458.98    '###'
    '##'      530.14    '###'
    '##'       289.4    '###'
    '#'       434.81    '#####'
    '###'     186.44    '####'
    '#'            0    '##'
    '#'       231.29    '#####'
    '#'       311.86    '#####'
    '##'      239.93    '##'
```

Write Quoted Text to CSV File

Create a table.

```
T = table(['M';'F';'M'],[45;41;36],...
    {'New York, NY';'San Diego, CA';'Boston, MA'},[true;false;false])
```

```
T = 3×4 table
    Var1    Var2         Var3          Var4
    ____    ____    _______________    _____

    M       45      'New York, NY'     true
    F       41      'San Diego, CA'    false
    M       36      'Boston, MA'       false
```

Write the table to a comma-separated text file named `myData.csv` and view the file contents. Use the `'QuoteStrings'` name-value pair argument to ensure that the commas in the third column are not treated as delimiters.

```
writetable(T,'myData.csv','Delimiter',',','QuoteStrings',true)
type 'myData.csv'
```

```
Var1,Var2,Var3,Var4
"M",45,"New York, NY",1
"F",41,"San Diego, CA",0
"M",36,"Boston, MA",0
```

Write Table to Specific Sheet and Range in Spreadsheet

Create a table.

```
T = table(['M';'F';'M'],[45 45;41 32;40 34],...
    {'NY';'CA';'MA'},[true;false;false])
```

```
T = 3×4 table
    Var1      Var2      Var3    Var4
    ____    ________    ____    _____

    M       45    45    'NY'    true
    F       41    32    'CA'    false
    M       40    34    'MA'    false
```

Write the table to a spreadsheet named `myData.xls`. Include the data on the second sheet in the 5-by-5 region with corners at `B2` and `F6`.

```
writetable(T,'myData.xls','Sheet',2,'Range','B2:F6')
```

Excel® fills the row of the spreadsheet from `B6` to `F6` with `#N/A` since the range specified is larger than the size of the input table `T`.

Input Arguments

`T` — Input data

table

Input data, specified as a table.

`filename` — File name

character vector | string

File name, specified as a character vector or string. To write to a specific folder, specify the full path name. Otherwise, `writetable` writes to a file in the current folder. If `filename` includes the file extension, then `writetable` determines the file format from the extension. Otherwise, `writetable` creates a comma separated text file and appends the extension `.txt`. Alternatively, you can specify `filename` without the file's extension, and then include the `'FileType'` name-value pair arguments to indicate the type of file.

- If `filename` does not exist, then `writetable` creates the file.
- If `filename` is the name of an existing text file, then `writetable` overwrites the file.

- If `filename` is the name of an existing spreadsheet file, then `writetable` writes a table to the specified location, but does not overwrite any values outside that range.

Example: `'myData.xls'` or `"myData.xls"`

Example: `'C:\test\myData.txt'`

Data Types: `char` | `string`

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'WriteVariableNames',false` indicates that the variable names should not be included as the first row of the output file.

Text and Spreadsheet Files

`'FileType'` — Type of file
`'text'` | `'spreadsheet'`

Type of file, specified as the comma-separated pair consisting of `'FileType'` and a character vector or string containing `'text'` or `'spreadsheet'`.

The `'FileType'` name-value pair must be used with the `filename` input argument. You do not need to specify the `'FileType'` name-value pair argument if `writetable` can determine the file type from an extension in the `filename` input argument. `writetable` can determine the file type from these extensions:

- `.txt`, `.dat`, or `.csv` for delimited text files
- `.xls`, `.xlsm`, or `.xlsx` for Excel spreadsheet files
- `.xlsb` for Excel spreadsheet files supported on systems with Excel for Windows

Example: `writetable(T,'mySpreadsheet','FileType','spreadsheet')`

Data Types: `char` | `string`

`'WriteVariableNames'` — Indicator for writing variable names as column headings
`true` (default) | `false` | `1` | `0`

Indicator for writing variable names as column headings, specified as the comma-separated pair consisting of `'WriteVariableNames'` and either `true`, `false`, `1`, or `0`.

Indicator	Behavior
`true`	`writetable` includes variable names as the column headings of the output. This is the default behavior. If both the `'WriteVariableNames'` and `'WriteRowNames'` logical indicators are `true`, then `writetable` uses the first dimension name from the property `T.Properties.DimensionNames` as the column heading for the first column of the output.
`false`	`writetable` does not include variable names in the output.

`'WriteRowNames'` — Indicator for writing row names in first column
`false` (default) | `true` | `0` | `1`

Indicator for writing row names in first column, specified as the comma-separated pair consisting of `'WriteRowNames'` and either `false`, `true`, `0`, or `1`.

Indicator	Behavior
`false`	`writetable` does not include the row names from `T` in the output. This is the default behavior.
`true`	`writetable` includes the row names from `T` as the first column of the output. If both the `'WriteVariableNames'` and `'WriteRowNames'` logical indicators are `true`, then `writetable` uses the first dimension name from the property `T.Properties.DimensionNames` as the column heading for the first column of the output.

`'DateLocale'` — Locale for writing dates
character vector | string

Locale for writing dates, specified as the comma-separated pair consisting of `'DateLocale'` and a character vector or a string. When writing `datetime` values to the file, use `DateLocale` to specify the locale in which `writetable` should write month

and day-of-week names and abbreviations. The character vector or string takes the form *xx_YY*, where *xx* is a lowercase ISO 639-1 two-letter code indicating a language, and *YY* is an uppercase ISO 3166-1 alpha-2 code indicating a country. For a list of common values for the locale, see the `Locale` name-value pair argument for the `datetime` function.

`writetable` ignores the `'DateLocale'` parameter value whenever dates can be written as Excel-formatted dates. See Algorithms for more information.

Example: `'DateLocale','ja_JP'` or `'DateLocale","ja_JP"`

Text Files Only

`'Delimiter'` — Field delimiter character

character vector | string

Field delimiter character, specified as the comma-separated pair consisting of `'Delimiter'` and a character vector or string containing one of the following specifiers.

Specifier	Field Delimiter
`','` `'comma'`	Comma. This is the default behavior.
`' '` `'space'`	Space
`'\t'` `'tab'`	Tab
`';'` `'semi'`	Semicolon
`'|'` `'bar'`	Vertical bar

You can use the `'Delimiter'` name-value pair only for delimited text files.

Example: `'Delimiter','space'` or `'Delimiter',"space"`

'QuoteStrings' — Indicator for writing quoted text

false (default) | true | 0 | 1

Indicator for writing quoted text, specified as the comma-separated pair consisting of 'QuoteStrings' and either false, true, 0, or 1. If 'QuoteStrings' is true, then writetable encloses the text in double quotation marks, and replaces any double-quote characters that appear as part of that text with two double-quote characters. For an example, see "Write Quoted Text to CSV File" on page 1-12550.

You can use the 'QuoteStrings' name-value pair only with delimited text files.

'Encoding' — Character encoding scheme

'UTF-8' | 'ISO-8859-1' | 'windows-1251' | 'windows-1252' | ...

Character encoding scheme associated with the file, specified as the comma-separated pair consisting of 'Encoding' and 'system' or a standard character encoding scheme name like one of the values in this table. When you do not specify any encoding or specify encoding as 'system', the writetable function uses your system default encoding to write the file.

'Big5'	'ISO-8859-1'	'windows-847'
'Big5-HKSCS'	'ISO-8859-2'	'windows-949'
'CP949'	'ISO-8859-3'	'windows-1250'
'EUC-KR'	'ISO-8859-4'	'windows-1251'
'EUC-JP'	'ISO-8859-5'	'windows-1252'
'EUC-TW'	'ISO-8859-6'	'windows-1253'
'GB18030'	'ISO-8859-7'	'windows-1254'
'GB2312'	'ISO-8859-8'	'windows-1255'
'GBK'	'ISO-8859-9'	'windows-1256'
'IBM866'	'ISO-8859-11'	'windows-1257'
'KOI8-R'	'ISO-8859-13'	'windows-1258'
'KOI8-U'	'ISO-8859-15'	'US-ASCII'
	'Macintosh'	'UTF-8'
	'Shift_JIS'	

Example: 'system' or "system" uses the system default encoding.

Data Types: `char` | `string`

Spreadsheet Files Only

`'Sheet'` — Worksheet to write to

character vector | string | positive integer

Worksheet to write to, specified as the comma-separated pair consisting of `'Sheet'` and a character vector or a string containing the worksheet name or a positive integer indicating the worksheet index. The worksheet name cannot contain a colon (`:`).
To determine the names of sheets in a spreadsheet file, use `[status,sheets] = xlsfinfo(filename)`.

If the sheet does not exist, then `writetable` adds a new sheet at the end of the worksheet collection. If the sheet is an index larger than the number of worksheets, then `writetable` appends empty sheets until the number of worksheets in the workbook equals the sheet index. In either case, `writetable` generates a warning indicating that it has added a new worksheet.

You can use the `'Sheet'` name-value pair only with spreadsheet files.

Example: `'Sheet',2`

Example: `'Sheet', 'MySheetName'`

Example: `'Sheet', "MySheetName"`

Data Types: `char` | `string` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'Range'` — Rectangular portion of worksheet to write to

character vector | string

Rectangular portion of worksheet to write to, specified as the comma-separated pair consisting of `'Range'` and a character vector or string in one of the following forms.

Form of the Value of `Range`	Description
`'Corner1'`	*`Corner1`* specifies the first cell of the region to write. `writetable` writes table `T` beginning at this cell. **Example:** `'Range','D2'`

Form of the Value of `Range`	Description
`'Corner1:Corner2'`	*`Corner1`* and *`Corner2`* are two opposing corners that define the region to write. For example, `'D2:H4'` represents the 3-by-5 rectangular region between the two corners `D2` and `H4` on the worksheet. The `'Range'` name-value pair argument is not case sensitive, and uses Excel A1 reference style (see Excel help). **Example:** `'Range','D2:H4'` • If the range you specify is smaller than the size of the input table `T`, then `writetable` writes only a subset of the input table that fits into the range. • If the range you specify is larger than the size of the input table `T`, then `writetable` leaves the remainder of the region as it is.

The `'Range'` name-value pair can only be used with Excel files.

Example: `'Range', 'A1:F10'`

Example: `'Range', "A1:F10"`

Data Types: `char | string`

Limitations

- On Linux platforms, the `xlsread` function or the Import Tool cannot open spreadsheet files written by the `writetable` function.

Algorithms

- Excel converts `Inf` values to `65535`. MATLAB converts `NaN`, `NaT`, `<undefined>` categorical values, and `<missing>` string values to empty cells.
- For Excel files, `writetable` writes `table` variables containing `datetime` arrays as Excel dates. If the `table` contains `datetime` arrays with years prior to either 1900 or 1904, then `writetable` writes the variables as text. For more information on Excel dates, see https://support.microsoft.com/en-us/kb/214330.

- There are some instances where the `writetable` function creates a file that does not represent `T` exactly. You will notice this when you use `readtable` to read that file. The resulting table might not have the same format or contents as the original table. If you need to save a table and retrieve it at a later time to match the original table exactly, with the same data and organization, then save it as a MAT-file. `writetable` writes an inexact table in the following instances:
  - When writing to text files, `writetable` outputs numeric variables using `long g` format, and categorical or character variables as unquoted characters.
  - For variables that have more than one column, `writetable` appends a unique identifier to the variable name to use as the column headings.
  - For output variables that have more than two dimensions, `writetable` outputs these variables as two dimensional where the trailing dimensions are collapsed. For example, `writetable` outputs a 4-by-3-by-2 variable as if its size were 4-by-6.
  - For variables with a `cell` data type, `writetable` outputs the contents of each cell as a single row, in multiple fields. If the contents are other than numeric, logical, character, or categorical, then `writetable` outputs a single empty field.

See Also

See Also

`readtable` | `table`

Introduced in R2013b

write

Class: Tiff

Write entire image

Syntax

```
write(tiffobj,imageData)
write(tiffobj,Y,Cb,Cr)
```

Description

`write(tiffobj,imageData)` writes `imageData` to TIFF file associated with the Tiff object, `tiffobj`. The `write` method breaks the data into strips or tiles, depending on the value of the `RowsPerStrip` tag, or the `TileLength` and `TileWidth` tags.

`write(tiffobj,Y,Cb,Cr)` writes the YCbCr component data to the TIFF file. Use this syntax only for images with a YCbCr photometric interpretation.

Examples

Write Image Data

Write tags and image data to a new TIFF file.

Read sample data into an array, `imdata`. Create a `Tiff` object associated with a new file, `myfile.tif`, and open the file for writing.

```
imdata = imread('example.tif');
t = Tiff('myfile.tif','w');
```

Set tag values.

```
setTag(t,'ImageLength',size(imdata,1))
setTag(t,'ImageWidth',size(imdata,2))
setTag(t,'Photometric',Tiff.Photometric.RGB)
```

```
setTag(t,'BitsPerSample',8)
setTag(t,'SamplesPerPixel',size(imdata,3))
setTag(t,'TileWidth',128)
setTag(t,'TileLength',128)
setTag(t,'Compression',Tiff.Compression.JPEG)
setTag(t,'PlanarConfiguration',Tiff.PlanarConfiguration.Chunky)
setTag(t,'Software','MATLAB')
```

Write the image data to the TIFF file.

```
write(t,imdata)
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"

See Also

Tiff.writeDirectory

Topics

"Exporting Image Data and Metadata to TIFF Files"

writeDirectory

Class: Tiff

Create new IFD and make it current IFD

Syntax

```
writeDirectory(tiffobj)
```

Description

`writeDirectory(tiffobj)` create a new image file directory (IFD) and makes it the current IFD. `Tiff` object methods operate on the current IFD. If you are creating a TIFF file that only contains one image, you do not need to use this method. With single-image TIFF files, just close the `Tiff` object to write data to the file.

Examples

Open a TIFF file for modification and create a new IFD in the file. `writeDirectory` makes the newly created IFD the current IFD. Replace the name `myfile.tif` with the name of a TIFF file on your MATLAB path.

```
t = Tiff('myfile.tif', 'r+');
dnum = currentDirectory(t);
writeDirectory(t);
dnum = currentDirectory(t);
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"

- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFWriteDirectory` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.write | Tiff.close

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

writeEncodedStrip

Class: Tiff

Write data to specified strip

Syntax

```
writeEncodedStrip(tiffobj,stripNumber,imageData)
writeEncodedStrip(tiffobj,stripNumber,Y,Cb,Cr)
```

Description

`writeEncodedStrip(tiffobj,stripNumber,imageData)` writes the data in `imageData` to the strip specified by `stripNumber`. Strip identification numbers are one-based. If `imageData` has fewer bytes than fit into a strip, `writeEncodedStrip` silently pads the strip. If `imageData` has more bytes than fit into a strip, `writeEncodedStrip` issues a warning and truncates the data. To determine the size of a strip, view the value of the `RowsPerStrip` tag.

`writeEncodedStrip(tiffobj,stripNumber,Y,Cb,Cr)` writes the YCbCr component data to the specified tile. You must set the `YCbCrSubSampling` tag.

Examples

Write Image Data to Strips

Open a `Tiff` object for writing and set tag values.

```
t = Tiff('myfile.tif','w');
setTag(t,'ImageLength',32)
setTag(t,'ImageWidth',32)
setTag(t,'Photometric',Tiff.Photometric.MinIsBlack)
setTag(t,'BitsPerSample',8)
setTag(t,'SamplesPerPixel',1)
setTag(t,'RowsPerStrip',16)
```

```
setTag(t,'PlanarConfiguration',Tiff.PlanarConfiguration.Chunky)
```

Write data to the first and second strips.

```
writeEncodedStrip(t,1,ones(16,32,'uint8'))
writeEncodedStrip(t,2,2*ones(16,32,'uint8'))
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFWriteEncodedStrip` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.writeEncodedTile

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

writeEncodedTile

Class: Tiff

Write data to specified tile

Syntax

```
writeEncodedTile(tiffobj,tileNumber,imageData)
writeEncodedTile(tiffobj,tileNumber,Y,Cb,Cr)
```

Description

`writeEncodedTile(tiffobj,tileNumber,imageData)` writes the data in `imageData` to the tile specified by `tileNumber`. Tile identification numbers are one-based. If `imageData` has fewer bytes than fit into a tile, `writeEncodedTile` silently pads the tile. If `imageData` has more bytes than fit into a tile, `writeEncodedTile` issues a warning and truncates the data. To determine the size of a tile, view the value of the `tileLength` and `tileWidth` tags.

`writeEncodedTile(tiffobj,tileNumber,Y,Cb,Cr)` writes the YCbCr component data to the specified tile. You must set the `YCbCrSubSampling` tags.

Examples

Write Image Data to Tiles

Open a `Tiff` object for writing and set tag values.

```
t = Tiff('myfile.tif','w');
setTag(t,'ImageLength',32)
setTag(t,'ImageWidth',32)
setTag(t,'Photometric',Tiff.Photometric.MinIsBlack)
setTag(t,'BitsPerSample',8)
setTag(t,'SamplesPerPixel',1)
setTag(t,'TileWidth',16)
```

```
setTag(t,'TileLength',16)
setTag(t,'PlanarConfiguration',Tiff.PlanarConfiguration.Chunky)
```

Write data to four tiles.

```
writeEncodedTile(t,1,ones(16,16,'uint8'))
writeEncodedTile(t,2,2*ones(16,16,'uint8'))
writeEncodedTile(t,3,3*ones(16,16,'uint8'))
writeEncodedTile(t,4,4*ones(16,16,'uint8'))
close(t)
```

Tutorials

- "Exporting Image Data and Metadata to TIFF Files"
- "Reading Image Data and Metadata from TIFF Files"

References

This method corresponds to the `TIFFWriteEncodedTile` function in the LibTIFF C API. To use this method, you must be familiar with the TIFF specification and technical notes. View this documentation at LibTIFF - TIFF Library and Utilities.

See Also

Tiff.writeEncodedStrip

Topics

"Exporting Image Data and Metadata to TIFF Files"
"Reading Image Data and Metadata from TIFF Files"

xlabel

Label x-axis

Syntax

```
xlabel(txt)
xlabel(target,txt)

xlabel( ___ ,Name,Value)
t = xlabel( ___ )
```

Description

`xlabel(txt)` labels the *x*-axis of the current axes or chart returned by the `gca` command. Reissuing the `xlabel` command replaces the old label with the new label.

`xlabel(target,txt)` adds the label to the axes or chart specified by `target`.

`xlabel( ___ ,Name,Value)` modifies the label appearance using one or more name-value pair arguments. For example, `'FontSize',12` sets the font size to 12 points. Specify name-value pair arguments after all other input arguments. Modifying the label appearance is not supported for all types of charts.

`t = xlabel( ___ )` returns the text object used as the *x*-axis label. Use `t` to make future modifications to the label after it is created.

Examples

Label x-Axis

Display `Population` beneath the *x*-axis.

```
plot((1:10).^2)
xlabel('Population')
```

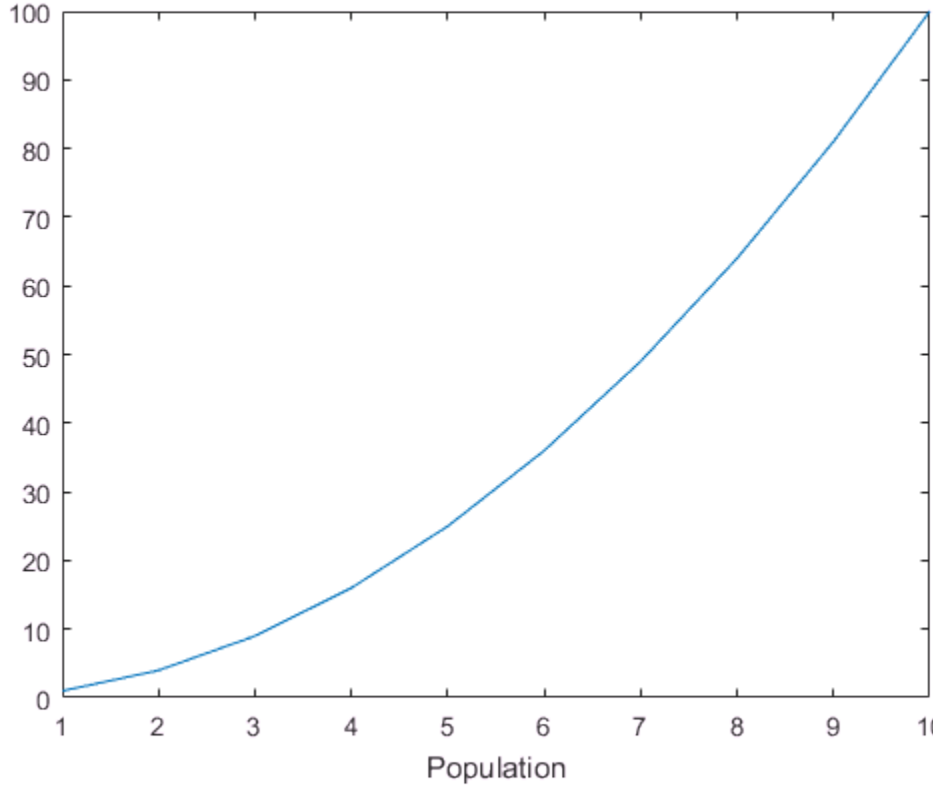

Create Multiline x-Axis Label

Create a multiline label using a cell array of character vectors.

```
plot((1:10).^2)
xlabel({'Population','(in thousands)'})
```

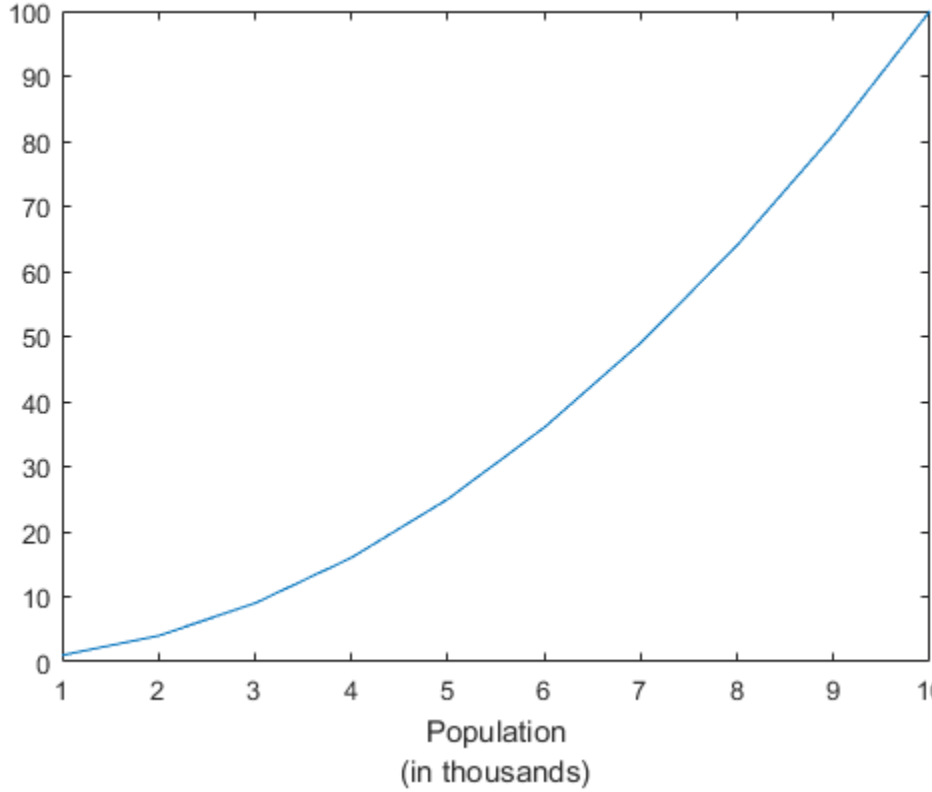

Include Greek Letters in x-Axis Label

Include Greek letters and other special characters in the label using TeX markup.

```
x = linspace(-2*pi,2*pi);
y = sin(x);
plot(x,y)
xlabel('-2\pi \leq x \leq 2\pi')
```

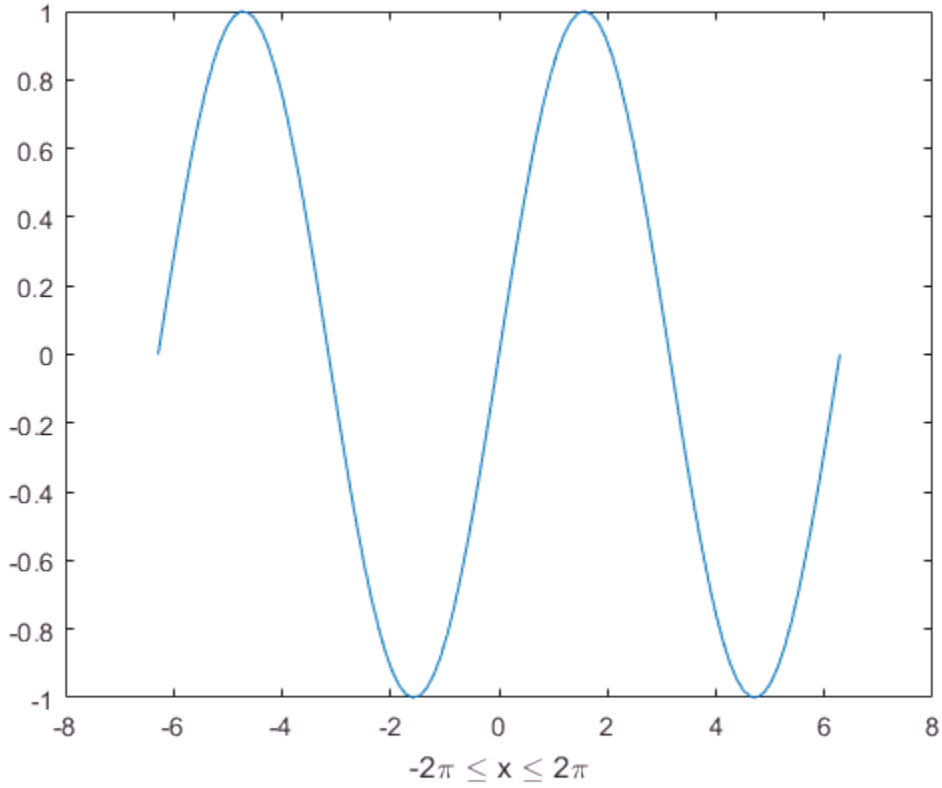

Include Variable Value in x-Axis Label

Add a label with text and a variable value. Use the `num2str` function to include a variable value in the label.

```
plot((1:10).^2)
year = 2014;
xlabel(['Population for Year ',num2str(year)])
```

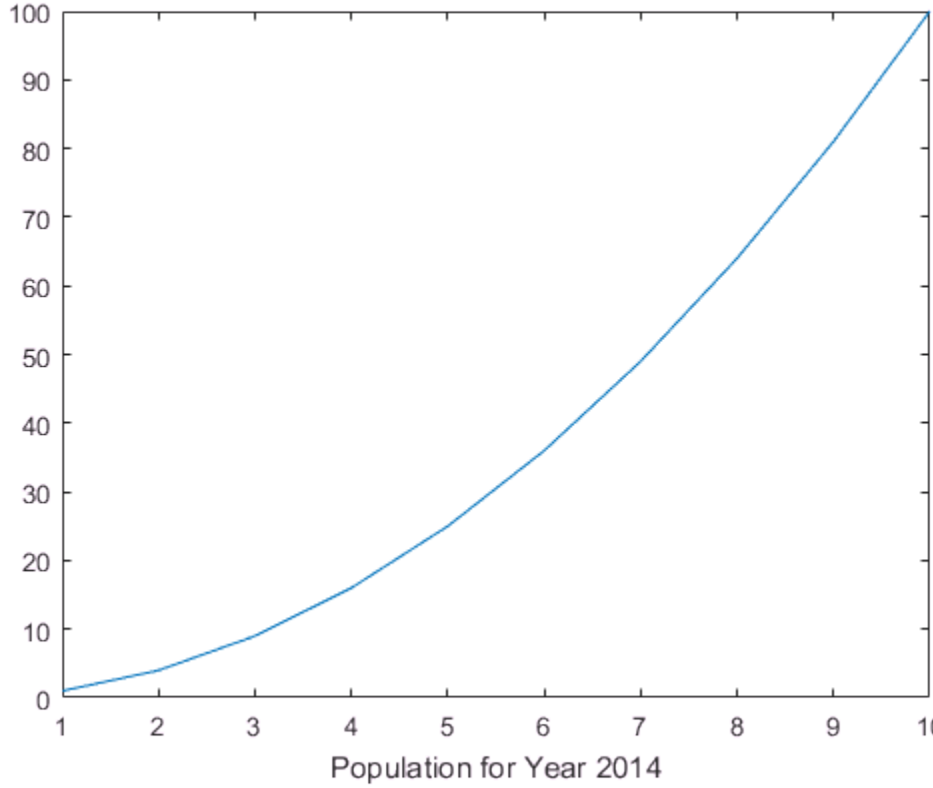

Include Superscript and Subscript in Axis Labels

Use the `'^'` and `'_'` characters to include superscripts and subscripts in the axis labels. Use curly braces `{}` to modify more than one character.

```
t = linspace(0,1);
y = exp(t);
plot(t,y)
xlabel('t_{seconds}')
ylabel('e^t')
```

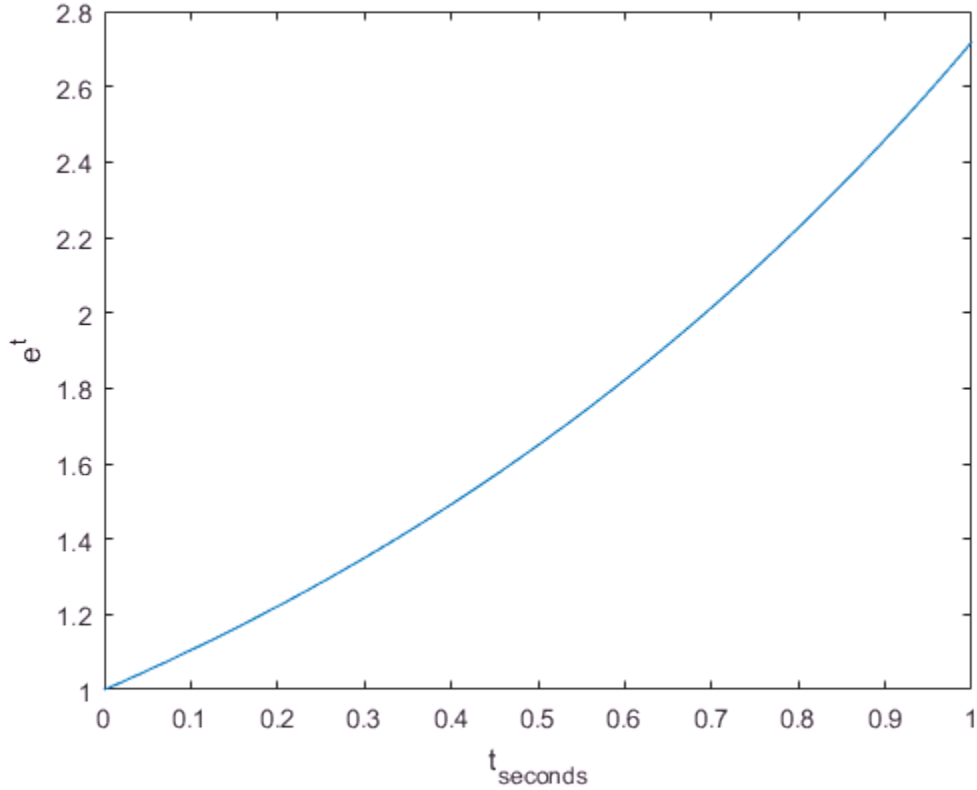

Change x-Axis Label Font Size and Color

Use `Name,Value` pair arguments to set the font size, font weight, and text color properties of the *x*-axis label.

```
plot((1:10).^2)
xlabel('Population','FontSize',12,'FontWeight','bold','Color','r')
```

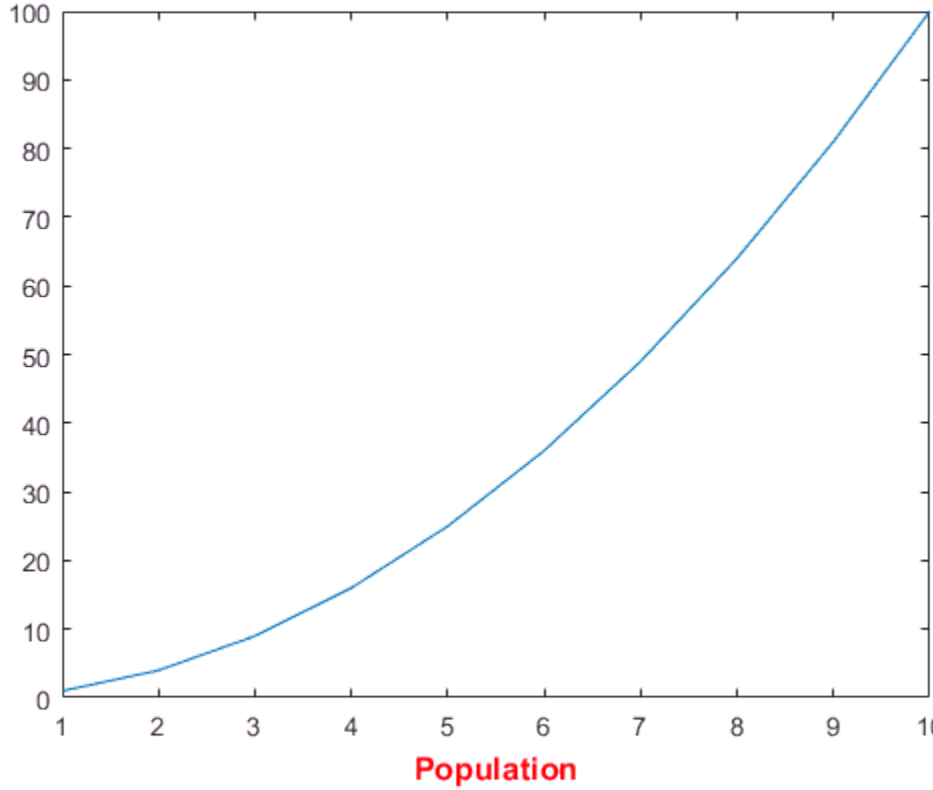

Label x-Axis of Specific Subplot

Create a figure with two subplots. Label the *x*-axis of the top subplot.

```
ax1 = subplot(2,1,1);
plot((1:10).^2)
xlabel(ax1,'Population')

ax2 = subplot(2,1,2);
plot((1:10).^3)
```

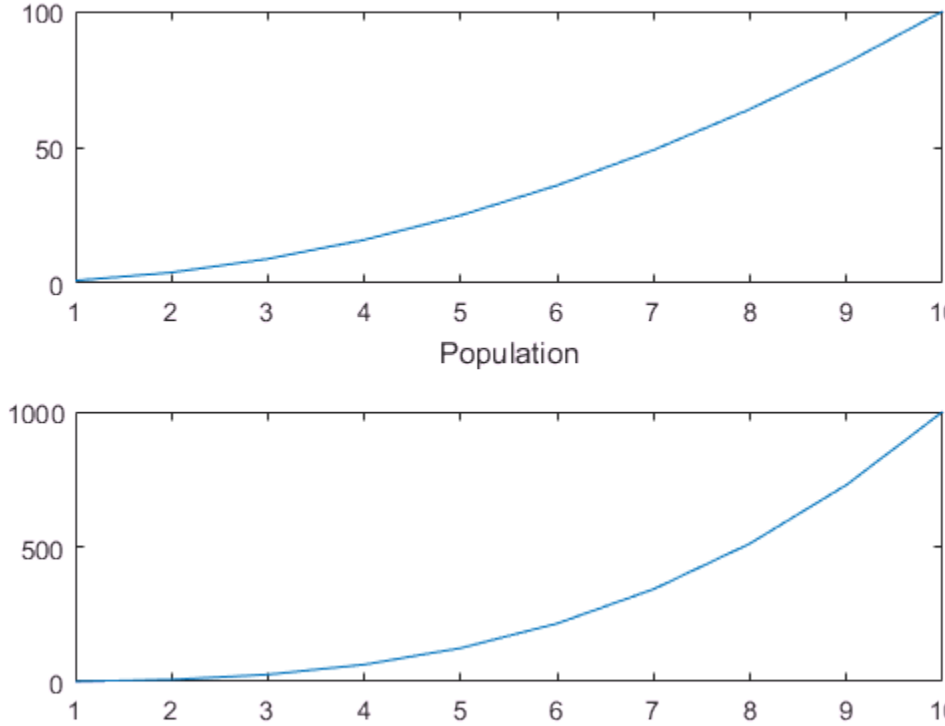

Modify x-Axis Label After Creation

Label the *x*-axis and return the text object used as the label.

```
plot((1:10).^2)
t = xlabel('Population');
```

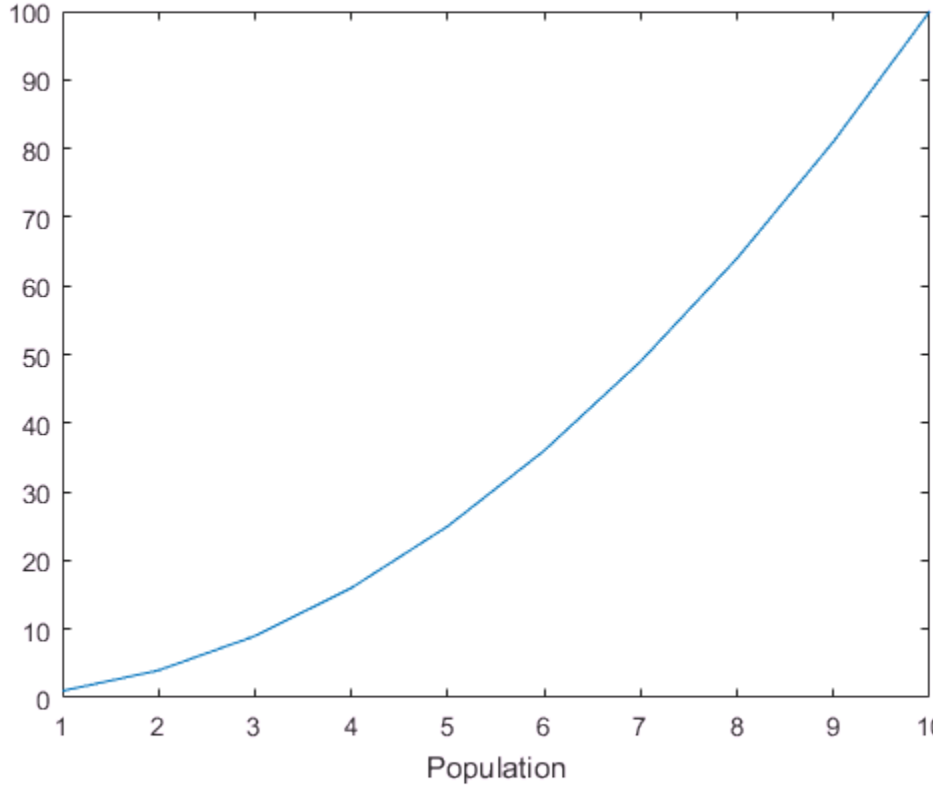

Use `t` to set text properties of the label after it has been created. For example, set the color of the label to red. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
t.Color = 'red';
```

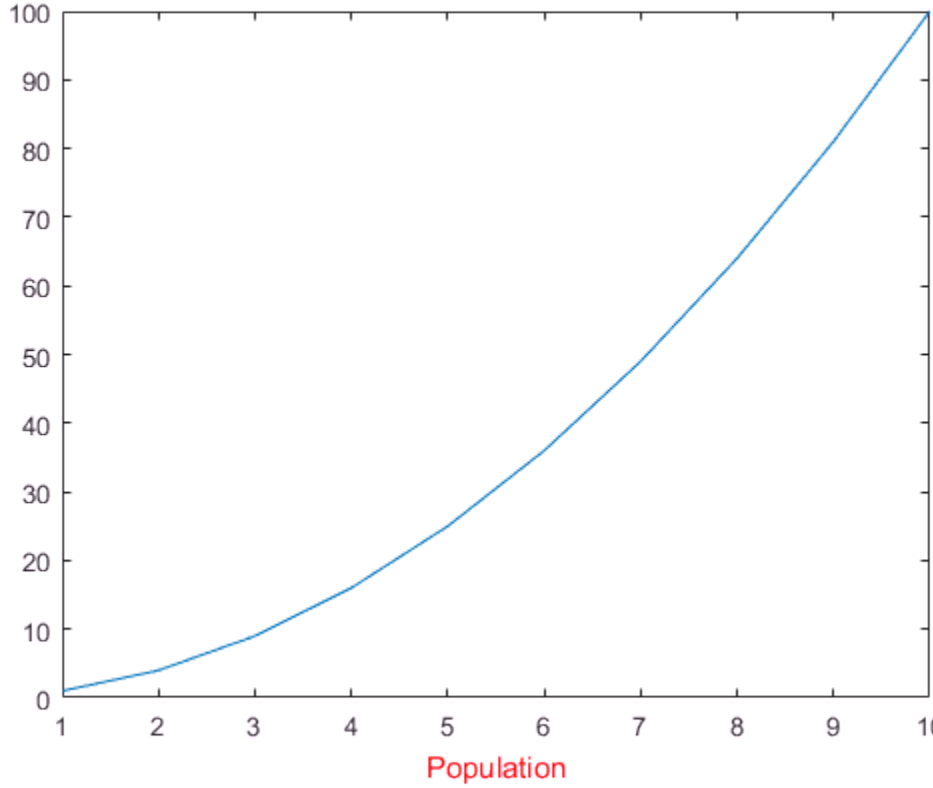

- "Add Text to Graph Interactively"

Input Arguments

`txt` — Axis label

character array | cell array | numeric value

Axis label, specified as a character array, cell array, or numeric value.

Example: `'my label'`

Example: `{'first line','second line'}`

Example: 123

To include numeric variables with text in a label, use the `num2str` function. For example:

```
x = 42;
txt = ['The value is ',num2str(x)];
```

To include special characters, such as superscripts, subscripts, Greek letters, or mathematical symbols use TeX markup. For a list of supported markup, see the `Interpreter` property.

To create multiline labels:

- Use a cell array, where each cell contains a line of text, such as `{'first line','second line'}`.
- Use a character array, where each row contains the same number of characters, such as `['abc'; 'ab ']`.
- Use `sprintf` to create text with a new line character, such as `sprintf('first line \n second line')`.

Numeric labels are converted to text using `sprintf('%g',value)`. For example, `12345678` displays as `1.23457e+07`.

Note: The words `default`, `factory`, and `remove` are reserved words that will not appear in a label when quoted as a normal characters. To display any of these words individually, precede them with a backslash, such as `'\default'` or `'\remove'`.

`target` — Target for label

`Axes` object | graphics object

Target for label, specified as an `Axes` object or a graphics object that has an `XLabel` property. For example, you can add an *x*-axis label to a `HeatmapChart` object.

If you do not specify the target, then the `xlabel` function adds the label to the graphics object returned by the `gca` command.

Note: Some charts do not support modifying the label appearance, such as the color, or returning the text object as an output argument.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Color','red','FontSize',12` specifies red, 12-point font.

The text properties listed here are only a subset. For a complete list, see Text Properties.

`'FontSize'` — Font size
`11` (default) | scalar value greater than `0`

Font size, specified as a scalar value greater than `0` in point units. One point equals 1/72 inch. To change the font units, use the FontUnits property.

Setting the font size properties for the associated axes also affects the label font size. The label font size updates to equal the axes font size times the label scale factor. The FontSize property of the axes contains the axes font size. The LabelFontSizeMultiplier property of the axes contains the label scale factor. By default, the axes font size is 10 points and the scale factor is 1.1, so the *x*-axis label font size is 11 points.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'FontWeight'` — Thickness of text characters
`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

`'FontName'` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`'Color'` — Text color

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the text is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'Interpreter'` — Interpretation of text characters
`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value	`'\fontsize{15} text'`

Modifier	Description	Example
	in point units to change the font size.	
`\color{specifier}`	Font color — Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒
`\lambda`	λ	`\Phi`	Φ	`\downarrow`	↓
`\mu`	μ	`\Psi`	Ψ	`\circ`	°

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

Output Arguments

`t` — Text object
text object

Text object used as the *x*-axis label. Use `t` to access and modify properties of the label after it has been created.

See Also

See Also

Functions
`num2str` | `text` | `title` | `ylabel` | `zlabel`

Properties
Text Properties

Topics
"Add Text to Graph Interactively"

Introduced before R2006a

xtickangle

Rotate *x*-axis tick labels

Syntax

```
xtickangle(angle)
xtickangle(ax,angle)

ang = xtickangle
ang = xtickangle(ax)
```

Description

`xtickangle(angle)` rotates the *x*-axis tick labels for the current axes to the specified angle in degrees, where `0` is horizontal. Specify a positive value for counterclockwise rotation or a negative value for clockwise rotation.

`xtickangle(ax,angle)` rotates the tick labels for the axes specified by `ax` instead of the current axes.

`ang = xtickangle` returns the rotation angle for the *x*-axis tick labels of the current axes as a scalar value in degrees. Positive values indicate counterclockwise rotation. Negative values indicate clockwise rotation.

`ang = xtickangle(ax)` uses the axes specified by `ax` instead of the current axes.

Examples

Rotate *x*-Axis Tick Labels

Create a stem chart and rotate the *x*-axis tick labels so that they appear at a 45-degree angle from the horizontal plane.

```
x = linspace(0,10000,21);
```

```
y = x.^2;
stem(x,y)
xtickangle(45)
```

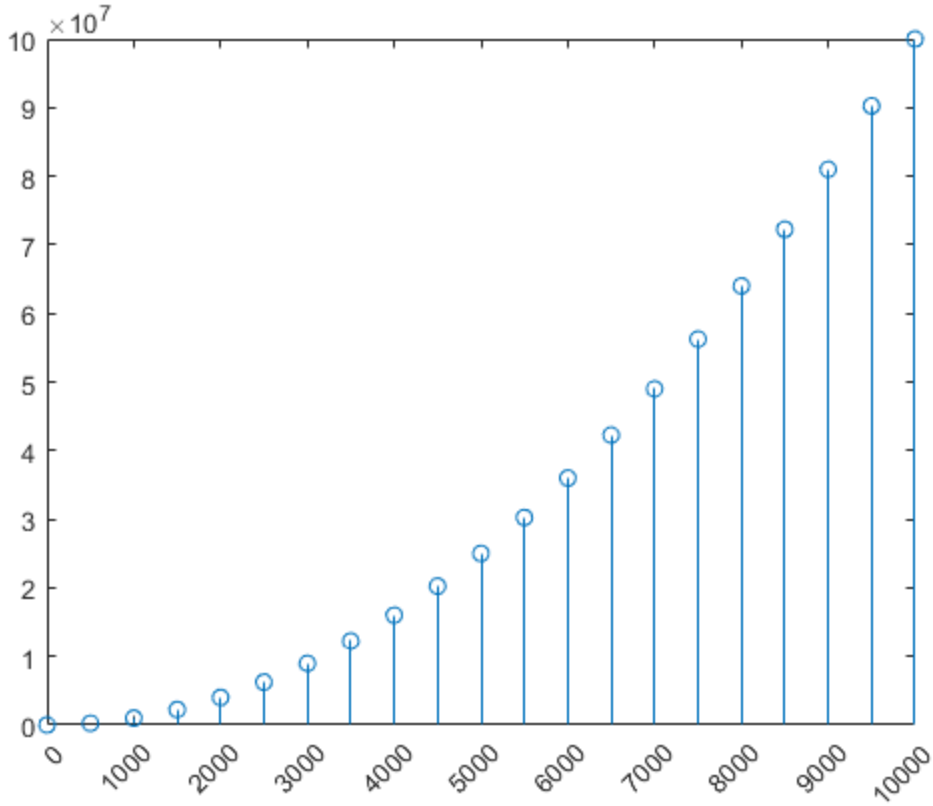

Rotate *x*-Axis Tick Labels for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Rotate the *x*-axis tick labels for the lower subplot by specifying `ax2` as the first input argument to `xtickangle`.

```
ax1 = subplot(2,1,1);
plot(rand(6))
```

```
ax2 = subplot(2,1,2);
plot(rand(6))
xtickangle(ax2,45)
```

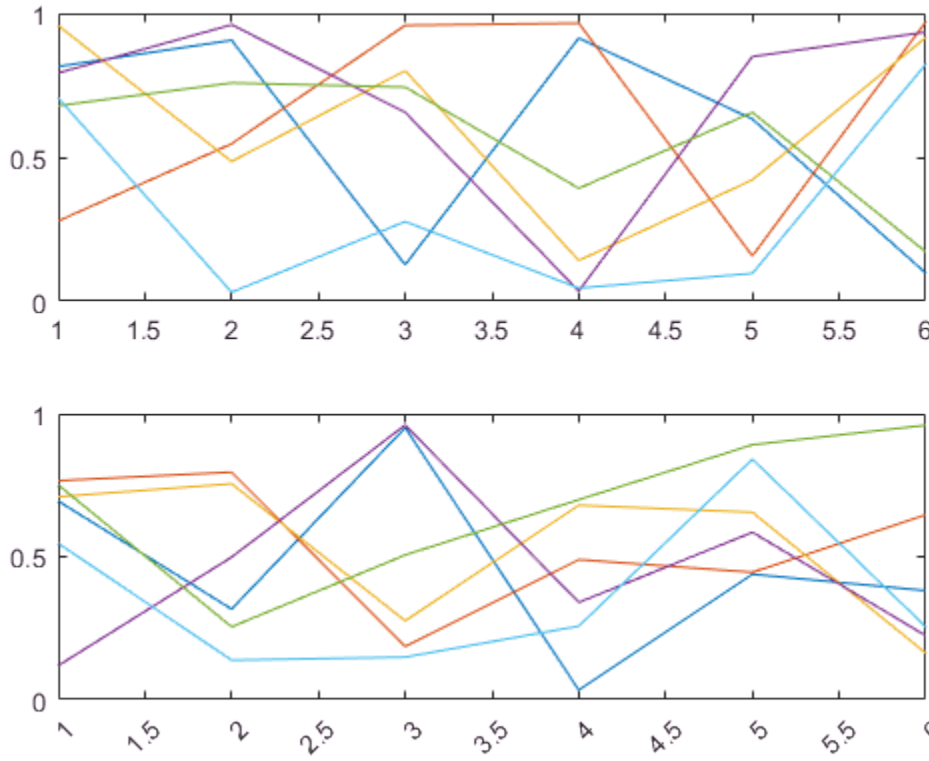

Query Current Angle for *x*-Axis Tick Labels

Create a stem chart. Then, query the rotation angle for the *x*-axis tick labels. By default, the labels are not rotated.

```
x = linspace(0,10000,21);
y = x.^2;
stem(x,y)
```

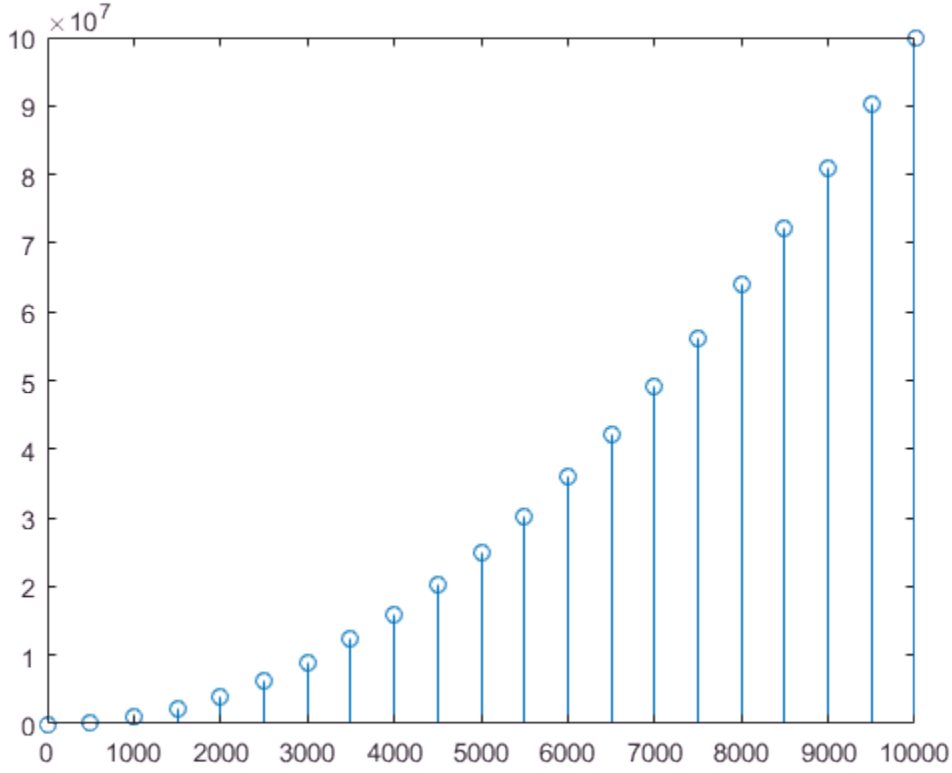


```
ang = xtickangle
```

```
ang = 0
```

Input Arguments

angle — Rotation of tick labels

0 (default) | scalar value in degrees

Rotation of tick labels, specified as a scalar value in degrees, where 0 is horizontal.

Example: `xtickangle(90)`

ax — Target axes
current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `xtickangle` uses the current axes.

Algorithms

The `xtickangle` function sets and queries the XTickLabelRotation property of the `Axes` object.

See Also

See Also

Functions
`xlim` | `xtickformat` | `xticklabels` | `xticks` | `ytickangle` | `ztickangle`

Properties
Axes Properties

Introduced in R2016b

xtickformat

Specify *x*-axis tick label format

Syntax

```
xtickformat(fmt)
xtickformat(datefmt)
xtickformat(durationfmt)
xtickformat(ax, ___ )

xfmt = xtickformat
xfmt = xtickformat(ax)
```

Description

`xtickformat(fmt)` sets the format for numeric *x*-axis tick labels. For example, specify `fmt` as `'usd'` to display the labels in U.S. dollars.

`xtickformat(datefmt)` sets the format for labels that show dates or times. For example, specify `datefmt` as `'MM-dd-yy'` to display dates such as `04-19-16`. This option applies only to an *x*-axis with datetime values.

`xtickformat(durationfmt)` sets the format for labels that show durations. For example, specify `durationfmt` as `'m'` to display the durations in minutes. This option applies only to an *x*-axis with duration values.

`xtickformat(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument.

`xfmt = xtickformat` returns the format style used for *x*-axis tick labels of the current axes. Depending on the type of labels along the *x*-axis, `xfmt` is a character vector of a numeric format, date format, or duration format.

`xfmt = xtickformat(ax)` returns the format style used for the axes specified by `ax` instead of the current axes.

Examples

Display *x*-Axis Tick Labels in Dollars

Display *x*-axis tick labels in dollars with and without decimal values.

Create a bar chart. Display the tick labels along the *x*-axis in dollars.

```
x = 0:20:100;
y = [88 67 98 43 45 65];
bar(x,y)
xtickformat('usd')
```

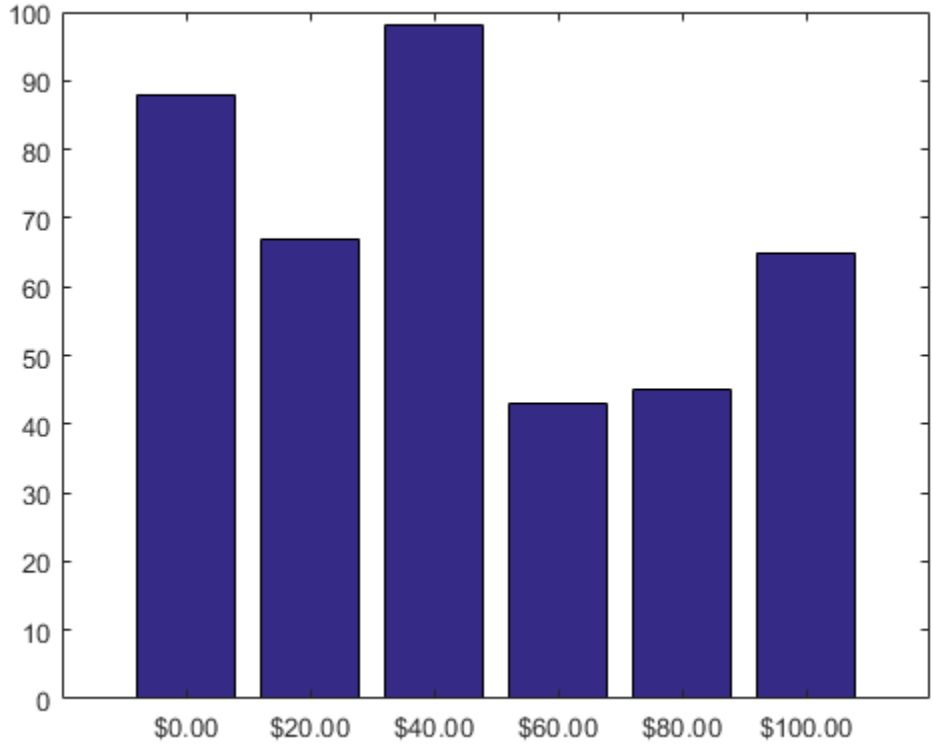

Query the tick label format. MATLAB® returns the format as a character vector containing the formatting operators.

```
fmt = xtickformat
```

```
fmt =

$%,.2f
```

Display the tick labels with no decimal values by tweaking the numeric format to use a precision value of 0 instead of 2.

```
xtickformat('$%,.0f')
```

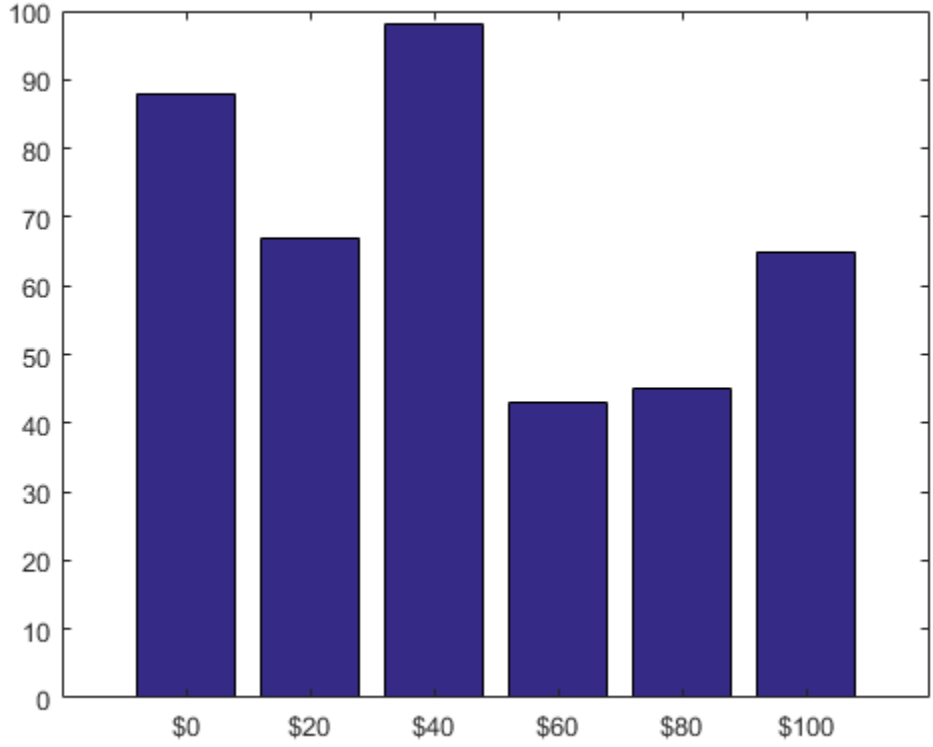

Display Text After Each *x*-Axis Tick Label

After creating a line chart, display the tick labels along the *x*-axis with the text "GHz" after each value.

```
x = 1:10;
y = [.17 .25 .27 .28 .3 .32 .33 .34 .345 .35];
plot(x,y,'-V')
xtickformat('%g GHz')
```

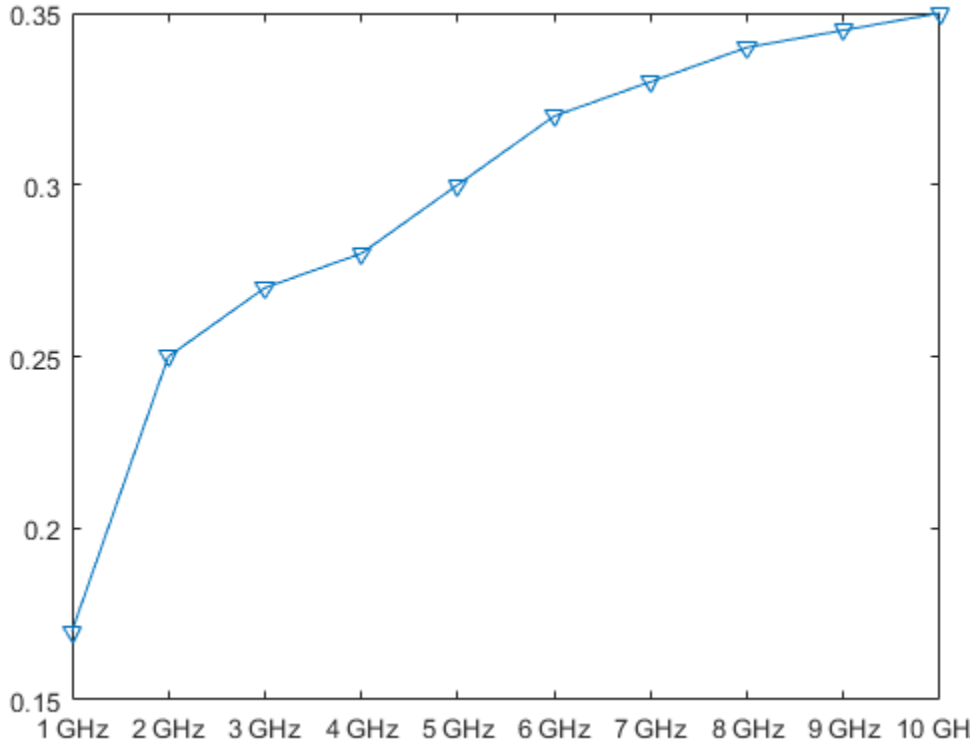

Control Number of Decimals Displayed

After creating a scatter plot, display the *x*-axis tick labels with two decimal places. Control the decimal places by passing `xtickformat` a character vector of a numeric format that uses fixed-point notation for the conversion character and a precision value of 2.

```
x = linspace(0,1,100);
y = randn(1,100).*cos(x);
scatter(x,y)
xtickformat('%.2f')
```

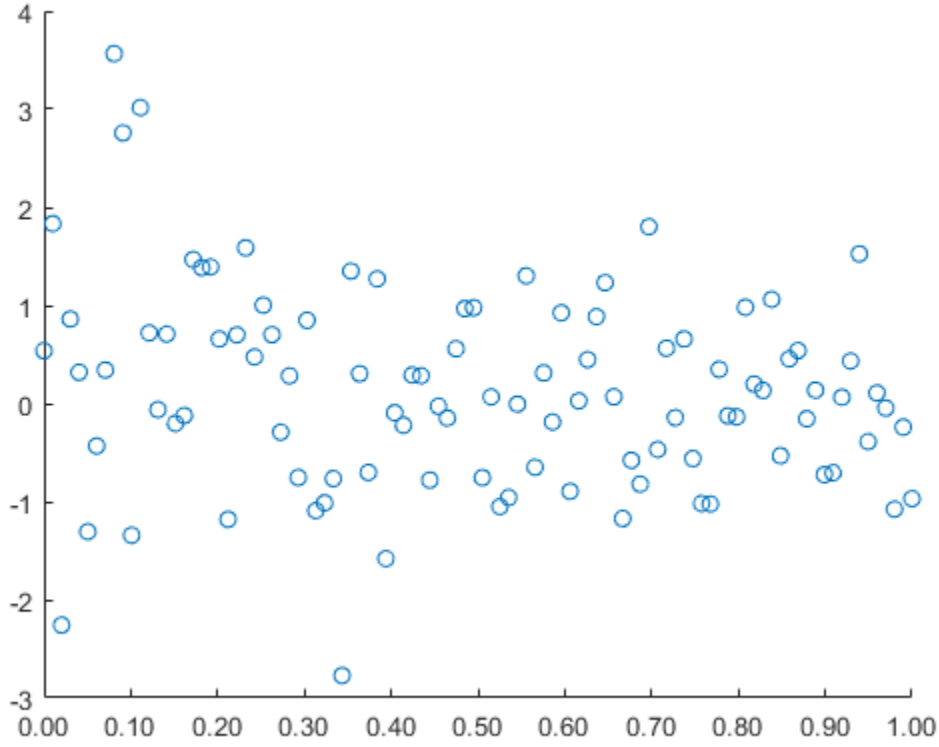

Specify Tick Label Format for *x*-Axis with Dates

Create a line plot with datetime values along the *x*-axis. Then, change the format of the dates.

```
t = datetime(2014,6,28) + caldays(1:10);
y = rand(1,10);
plot(t,y);
xtickformat('MM-dd')
```

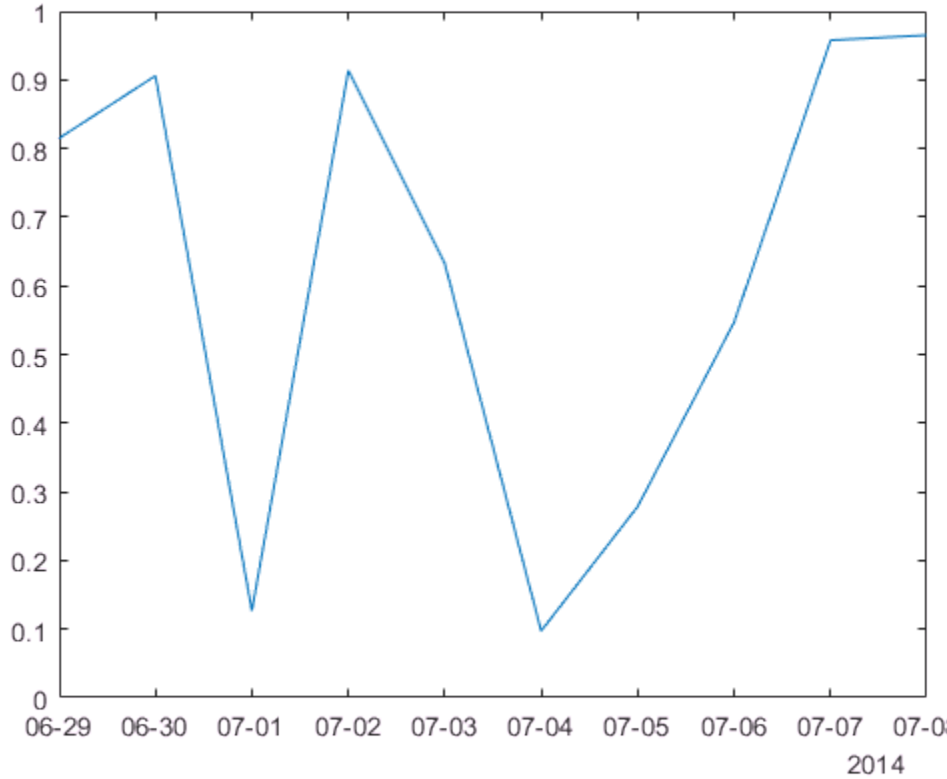

Specify Tick Label Format for *x*-Axis with Durations

Create a line plot with duration values along the *x*-axis. Then, change the format of the tick labels.

```
t = 0:seconds(30):minutes(3);
y = rand(1,7);
plot(t,y)
xtickformat('mm:ss')
```

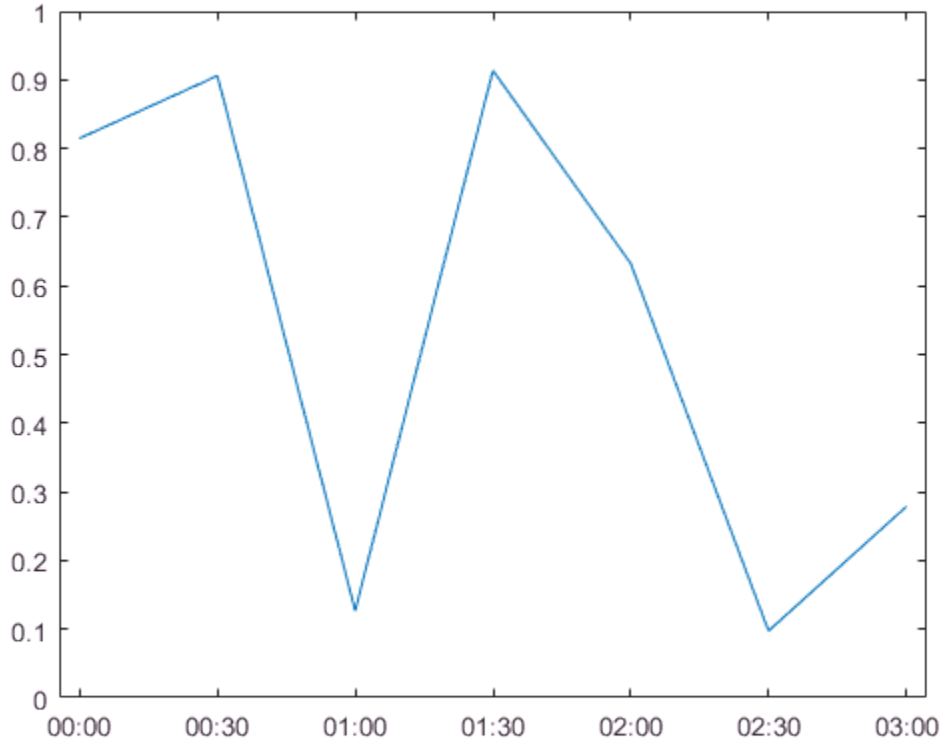

Query Current Format for *x*-Axis Tick Labels

Create a scatter plot and display the *x*-axis tick labels in Euro. Then, query the tick label format. MATLAB® returns the format as a character vector containing the formatting operators.

```
x = rand(100,1);
y = rand(100,1);
scatter(x,y)
xtickformat('eur')
```

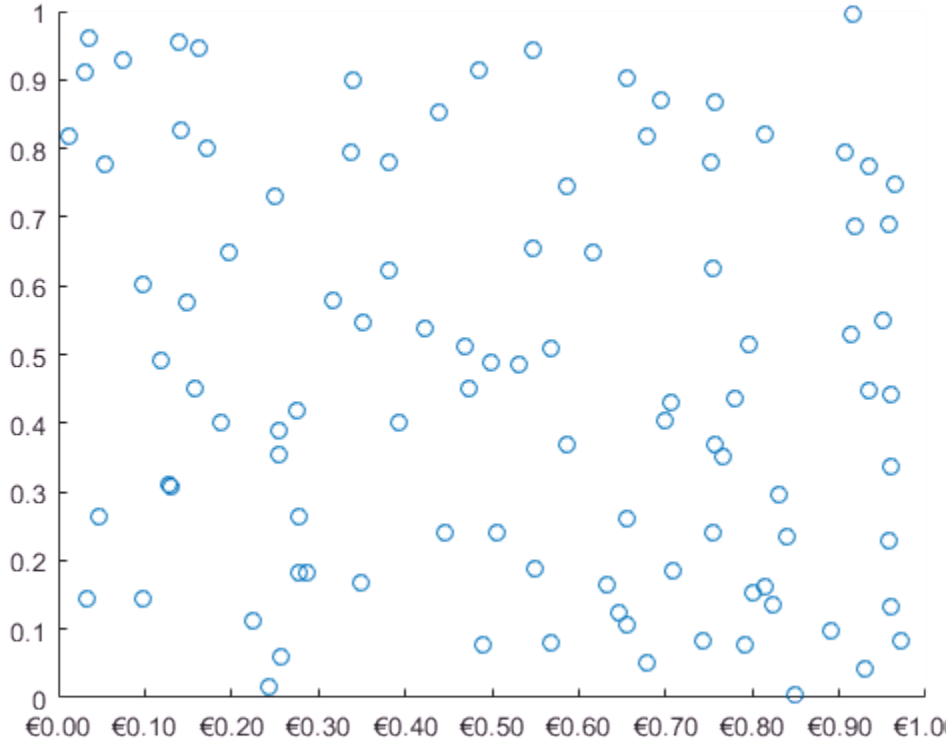


```
xfmt = xtickformat
```

```
xfmt =
'\x20AC%,.2f'
```

Specify *x*-Axis Tick Label Format for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Specify the tick label format for the *x*-axis of the lower subplot by specifying `ax2` as the first input argument to `xtickformat`. Display the tick labels in U.S. dollars.

```
ax1 = subplot(2,1,1);
plot(rand(6))
```

```
ax2 = subplot(2,1,2);
plot(rand(6))
xtickformat(ax2,'usd')
```

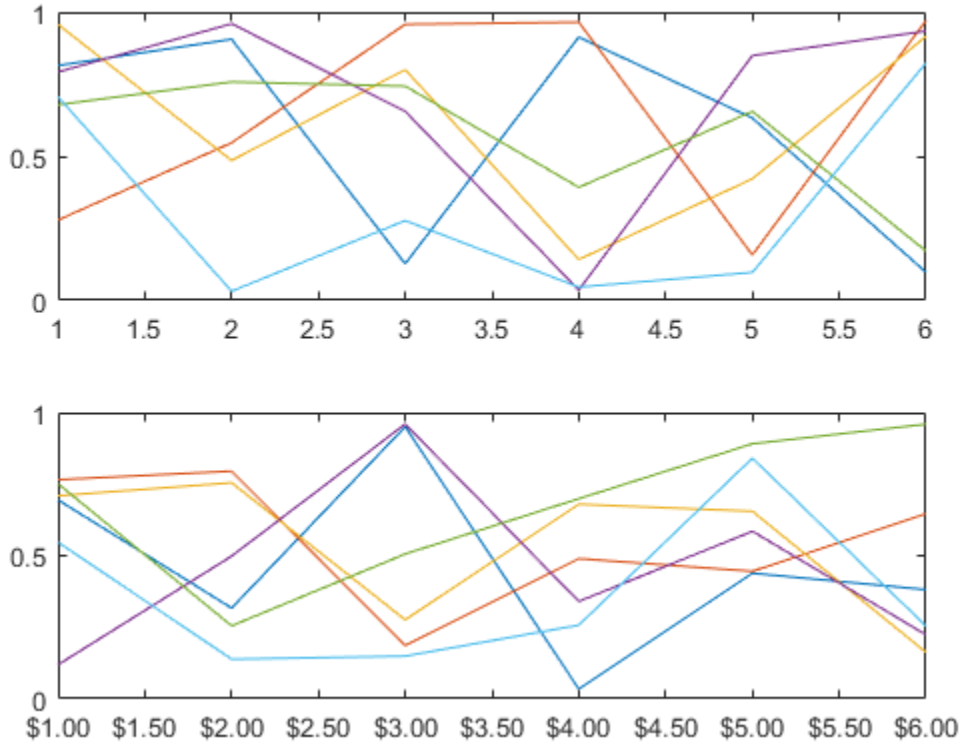

Input Arguments

`fmt` — Format and decimal precision for numeric tick labels

`'%g'` (default) | predefined format | character vector

Format and decimal precision for numeric tick labels, specified as one of the predefined formats listed in this table or a character vector of a custom numeric format.

Predefined Format	Description
`'usd'`	U.S. dollars. This option is equivalent using `'$%,.2f'`. If the labels use scientific notation, this option sets the exponent value to 0.
`'eur'`	Euro. This option is equivalent to using `'\x20AC%,.2f'` with an exponent value of 0.
`'gbp'`	British pound. This option is equivalent to using `'\x00A3%,.2f'` with an exponent value of 0.
`'jpy'`	Japanese yen. This option is equivalent to using `'\x00A5%,d'` with an exponent value of 0.
`'degrees'`	Display degree symbol after values. This option is equivalent to using `'%g\x00B0'` with the default exponent value.
`'percentage'`	Display percent sign after values. This option is equivalent to using `'%g%%'` with the default exponent value.
`'auto'`	Default format of `'%g'` with the default exponent value.

Example: `xtickformat('usd')`

Character Vector of Numeric Format

You can specify a custom numeric format by creating a character vector of identifiers.

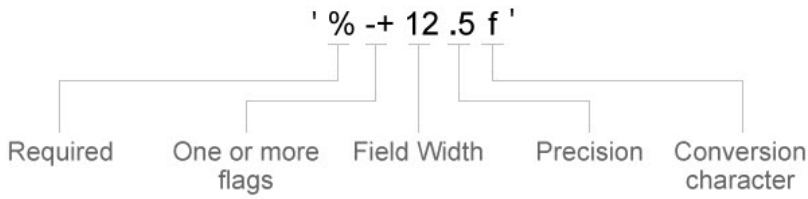

Identifiers are optional, except the percent sign and conversion character. Construct the format in this order:

- One or more flags — Options such as adding a plus sign before positive values. For a full list of options, see the table of Optional Flags.
- Field width — Minimum number of characters to print in the tick label. Specify the field width as an integer value. If the number of significant digits in the tick value is smaller than the field width, then the label is padded with spaces.
- Precision — Number of digits to the right of the decimal point or the number of significant digits, depending on the conversion character. Specify the precision as an integer value.
- Conversion character — Value type. For a full list of options, see the table of Conversion Characters. If you specify a conversion that does not fit the data, then MATLAB overrides the specified conversion, and uses `%e`.

Also, you can specify literal text at the beginning or end of the format. To print a single quotation mark, use `''`. To print a percent character, use `%%`.

Example: `xtickformat('%.2f')` displays the values using fixed-point notation with two decimal places.

Example: `xtickformat('$%.2f')` displays a dollar sign before each value.

Example: `xtickformat('%.2f million')` displays `million` after each value.

Optional Flags

Identifier	Description	Example of Numeric Format
`,`	Display commas every three digits, such as `'1,000'`.	`'%,4.4g'`
`+`	Print the sign character (+) for positive values, such as `'+100'`.	`'%+4.4g'`
`0`	Pad the field width with leading zeros instead of spaces, such as `'0100'`.	`'%04.4g'`
`–`	Left-justify, which pads the end of the value with spaces instead of the beginning.	`'%-4.4g'`

Identifier	Description	Example of Numeric Format
	For example, if the field width is 4, then this flag formats the label as `'100 '` instead of `' 100'`.	
#	For the `%f`, `%e`, and `%g` conversion characters, print the decimal point even when the precision is 0, such as `'100.'`. For `%g`, do not remove trailing zeros.	`'%#4.4g'`

Conversion Characters

Identifier	Description	Example
`d` or `i`	Signed integer with base 10. The precision value indicates the number of significant digits.	`'%.4d'` displays π as `0003`.
`f`	Fixed-point notation. The precision value indicates the number of decimal places.	`'%.4f'` displays π as `3.1416`.
`e`	Exponential notation. The precision value indicates the number of decimal places.	`'%.4e'` displays π as 3.1416×10^0.
`g`	The more compact version of `e` or `f`, with no trailing zeros. The precision value indicates the maximum number of decimal places.	`'%.4g'` displays π as `3.1416`.

`datefmt` — Format for dates and times

character vector | `'auto'`

Format for dates and times, specified as a character vector of a date format or `'auto'` for the default format. The default format is based on the data.

Example: `xtickformat('yyyy-MM-dd')` displays a date and time such as `2016-04-19`.

Example: `xtickformat('eeee, MMMM d, yyyy HH:mm:ss')` displays a date and time such as `Saturday, April 19, 2016 21:41:06`.

Example: `xtickformat('MMMM d, yyyy HH:mm:ss Z')` displays a date and time such as `April 19, 2016 21:41:06 -0400`.

The display format tables show the letter identifiers that you can use to construct the character vector. To separate the fields, you can include nonletter characters such as a hyphen, space, colon, or any non-ASCII characters. The identifiers correspond to the Unicode Locale Data Markup Language (LDML) standard for dates.

Date and Time Formats

Use these identifiers to specify the display formats of the date and time fields.

Letter Identifier	Description	Display
`G`	Era	`CE`
`y`	Year, with no leading zeros. See the Note that follows this table.	`2014`
`yy`	Year, using last two digits. See the Note that follows this table.	`14`
`yyy`, `yyyy` ...	Year, using at least the number of digits specified by the number of instances of `'y'`	For the year 2014, `'yyy'` displays `2014`, while `'yyyyy'` displays `02014`.
`u`, `uu`, ...	ISO year. A single number designating the year. An ISO year value assigns positive values to CE years and negative values to BCE years, with 1 BCE being year 0.	`2014`
`Q`	Quarter, using one digit	`2`
`QQ`	Quarter, using two digits	`02`
`QQQ`	Quarter, abbreviated	`Q2`
`QQQQ`	Quarter, full name	`2nd quarter`
`M`	Month, numerical using one or two digits	`4`
`MM`	Month, numerical using two digits	`04`

Letter Identifier	Description	Display
MMM	Month, abbreviated name	Apr
MMMM	Month, full name	April
MMMMM	Month, capitalized first letter	A
W	Week of the month	1
d	Day of the month, using one or two digits	5
dd	Day of the month using two digits	05
D	Day of the year, using one, two or three digits	95
DD	Day of the year using two digits	95
DDD	Day of the year using three digits	095
e	Day of the week, numerical using one or two digits.	7, where Sunday is the first day of the week.
ee	Day of the week, numerical using two digits	07
eee	Day, abbreviated name	Sat
eeee	Day, full name	Saturday
eeeee	Day, capitalized first letter	S
a	Day period (AM or PM)	PM
h	Hour, 12-hour clock notation using one or two digits	9
hh	Hour, 12-hour clock notation using two digits	09
H	Hour, 24-hour clock notation using one or two digits	21
HH	Hour, 24-hour clock notation using two digits	21
m	Minute, using one or two digits	41
mm	Minute, using two digits	41
s	Second, using one or two digits	6

Letter Identifier	Description	Display
ss	Second, using two digits	06
S, SS, ..., SSSSSSSSS	Fractional second, using the number of digits specified by the number of instances of 'S' (up to 9 digits).	'SSS' truncates 6.12345 seconds to 123.

Some tips and considerations:

- If you read a two-digit year number and specify the format as y or yy, then the pivot year determines the century to which the year belongs.
- Use one or more u characters instead of y characters to represent the year when working with year numbers near zero.
- Datetime values later than 144683 years CE or before 140743 BCE display only the year numbers, regardless of the specified format value.

Time Zone Offset Formats

Use these identifiers to specify the display format of the time zone offset. A time zone offset is the amount of time that a specific date and time is offset from UTC. A time zone offset is different from a time zone in that it comprises rules that determine the offsets for specific times of the year. Include a time zone offset identifier when you want to ensure that the time components are displayed unambiguously.

Letter Identifier	Description	Display
z	Abbreviated name of the time zone offset. If this value is not available, then the time zone offset uses the short UTC format, such as UTC-4.	EDT
Z	ISO 8601 basic format with hours, minutes, and optional seconds fields.	-0400
ZZZZ	Long UTC format.	UTC-04:00
ZZZZZ	ISO 8601 extended format with hours, minutes, and optional	-04:00

Letter Identifier	Description	Display
	seconds fields. A time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	
`x` or `X`	ISO 8601 basic format with hours field and optional minutes field. If you specify `X`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04`
`xx` or `XX`	ISO 8601 basic format with hours and minutes fields. If you specify `XX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-0400`
`xxx` or `XXX`	ISO 8601 extended format with hours and minutes fields. If you specify `XXX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04:00`
`xxxx` or `XXXX`	ISO 8601 basic format with hours, minutes, and optional seconds fields. If you specify `XXXX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-0400`
`xxxxx` or `XXXXX`	ISO 8601 extended format with hours, minutes, and optional seconds fields. If you specify `XXXXX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04:00`

`durationfmt` — Format for duration values

character vector

Format for duration values, specified as a character vector of a duration format.

To display a duration as a single number that includes a fractional part (for example, 1.234 hours), specify one of the following formats.

Format	Description
`'y'`	Number of exact, fixed-length years. A fixed-length year is equal to 365.2425 days.
`'d'`	Number of exact, fixed-length days. A fixed-length day is equal to 24 hours.
`'h'`	Number of hours
`'m'`	Number of minutes
`'s'`	Number of seconds

To display a duration in the form of a digital timer, specify one of these formats:

- `'dd:hh:mm:ss'`
- `'hh:mm:ss'`
- `'mm:ss'`
- `'hh:mm'`

In addition, you can display up to nine fractional second digits by appending up to nine `S` characters. For example, `'hh:mm:ss.SSS'` displays the milliseconds of a duration value to three digits.

`ax` — Target axes

current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `xtickformat` uses the current axes.

Algorithms

The `xtickformat` function sets and queries the `TickLabelFormat` property of the ruler object associated with the *x*-axis.

See Also

See Also

Functions

`xlim` | `xtickangle` | `xticklabels` | `xticks` | `ytickformat` | `ztickformat`

Properties

DatetimeRuler Properties | DurationRuler Properties | NumericRuler Properties

Introduced in R2016b

xticklabels

Set or query *x*-axis tick labels

Syntax

```
xticklabels(labels)
xl = xticklabels

xticklabels('auto')
xticklabels('manual')
m = xticklabels('mode')

___ = xticklabels(ax, ___ )
```

Description

`xticklabels(labels)` sets the *x*-axis tick labels for the current axes. Specify `labels` as a cell array of character vectors; for example, `{'January','February','March'}`. If you specify the labels, then the *x*-axis tick values and tick labels no longer update automatically based on changes to the axes.

`xl = xticklabels` returns the *x*-axis tick labels for the current axes.

`xticklabels('auto')` sets an automatic mode, enabling the axes to determine the *x*-axis tick labels. Use this option if you set the labels and then want to set them back to the default values.

`xticklabels('manual')` sets a manual mode, freezing the *x*-axis tick labels at the current values.

`m = xticklabels('mode')` returns the current value of the *x*-axis tick labels mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify the tick labels or set the mode to manual.

`___ = xticklabels(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes.

Examples

Specify *x*-Axis Tick Values and Labels

Create a line plot. Display tick marks along the *x*-axis at the values 0, 5, and 10. Then specify a label for each tick mark.

```
x = linspace(0,10);
y = x.^2;
plot(x,y)
xticks([0 5 10])
xticklabels({'x = 0','x = 5','x = 10'})
```

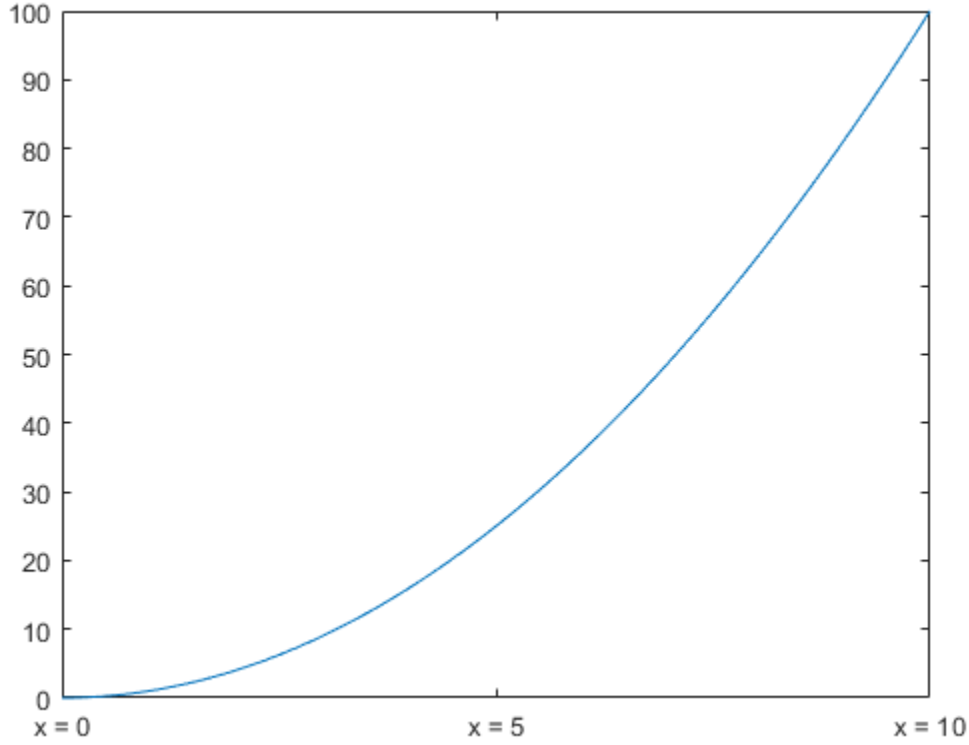

Display *x*-Axis Tick Labels in Terms of Pi

Create a line plot. Specify the *x*-axis limits and display tick marks along at the *x*-axis at increments of π .

```
x = linspace(0,6*pi);
y = sin(x);
plot(x,y)
xlim([0 6*pi])
xticks(0:pi:6*pi)
```

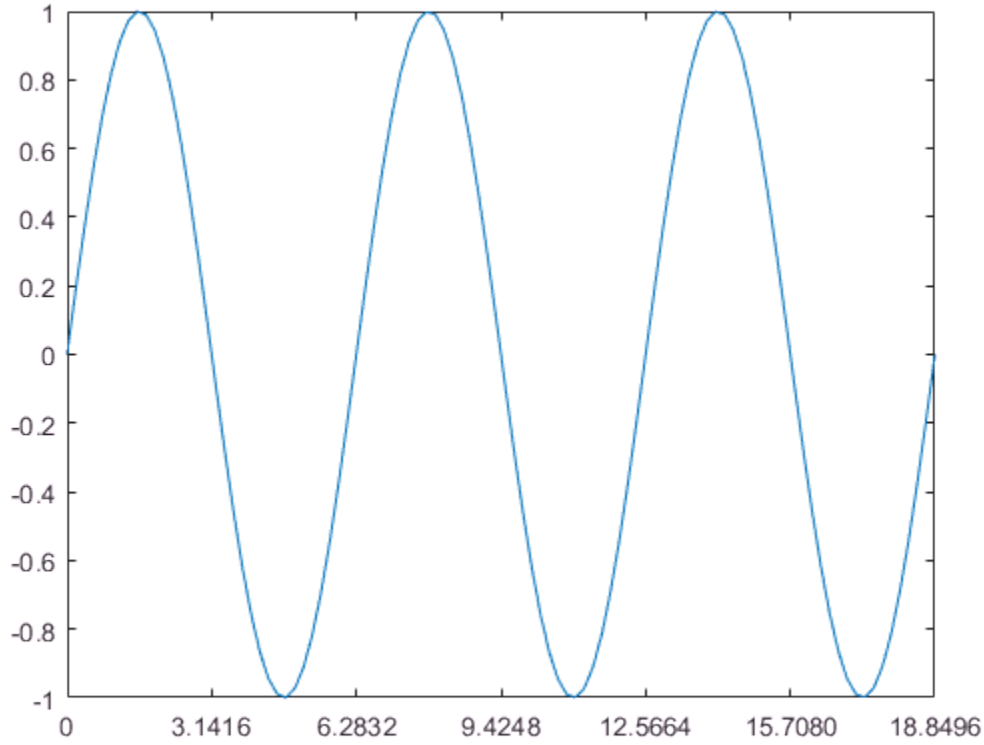

MATLAB® labels the tick marks with the numeric values. Change the labels to show the π symbol by specifying text for each label.

```
xticklabels({'0','\pi','2\pi','3\pi','4\pi','5\pi','6\pi'})
```

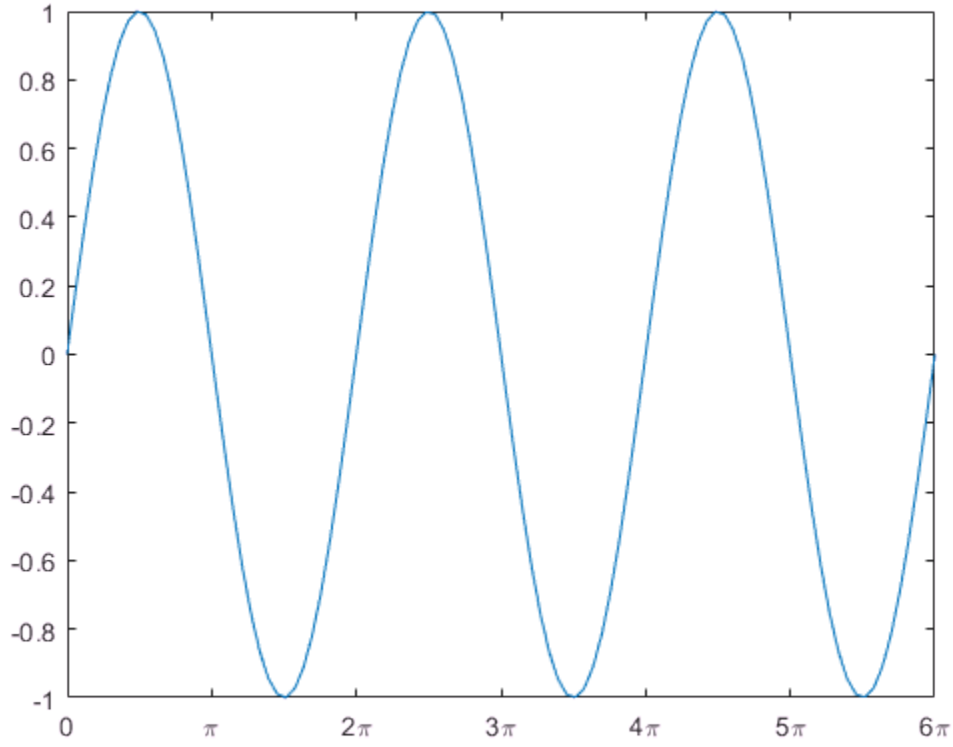

Specify *x*-Axis Tick Labels for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Plot random data in each subplot. Set the *x*-axis tick values and labels for the second subplot by specifying `ax2` as the first input argument.

```
ax1 = subplot(2,1,1);
plot(rand(3))

ax2 = subplot(2,1,2);
plot(rand(3))
xticks(ax2,[1 2 3])
```

```
xticklabels(ax2,{'one','two','three'})
```

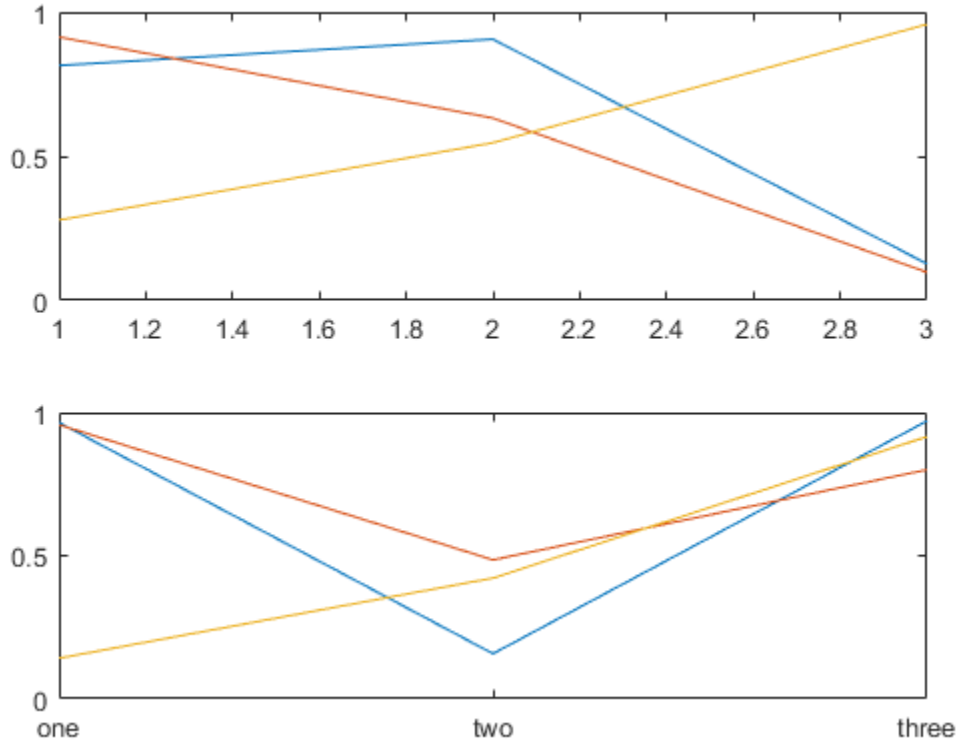

Set *x*-Axis Tick Labels Back to Default Labels

Create a stem chart, and specify the *x*-axis tick values and corresponding labels. Then set the *x*-axis tick values and labels back to the default values.

```
stem(1:10)
xticks([1 4 6 10])
xticklabels({'A','B','C','D'})
```

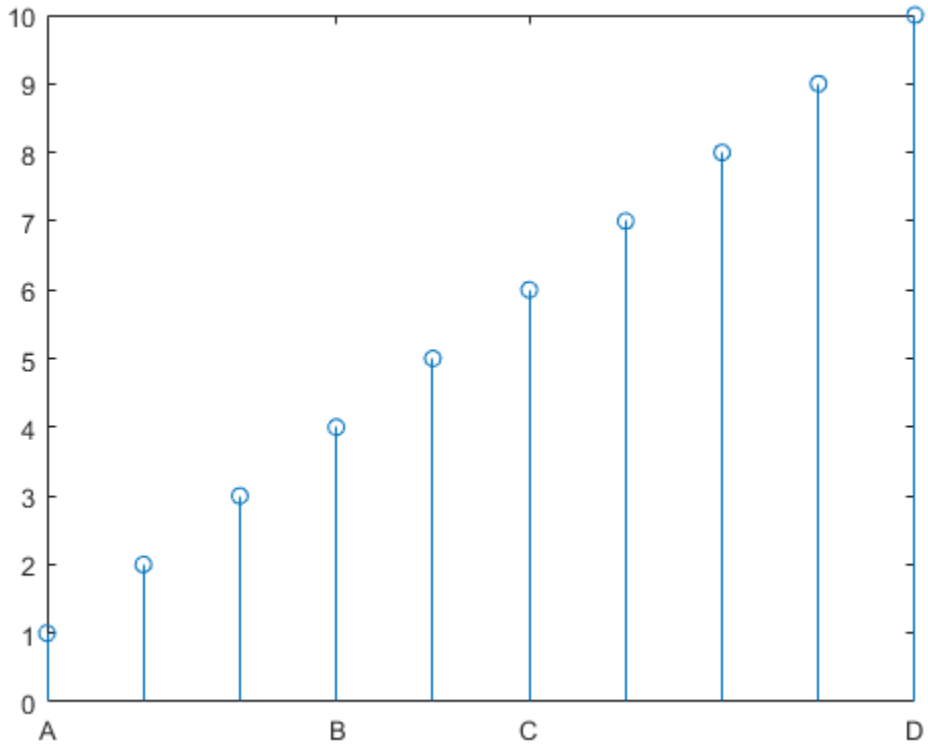


```
xticks('auto')
xticklabels('auto')
```

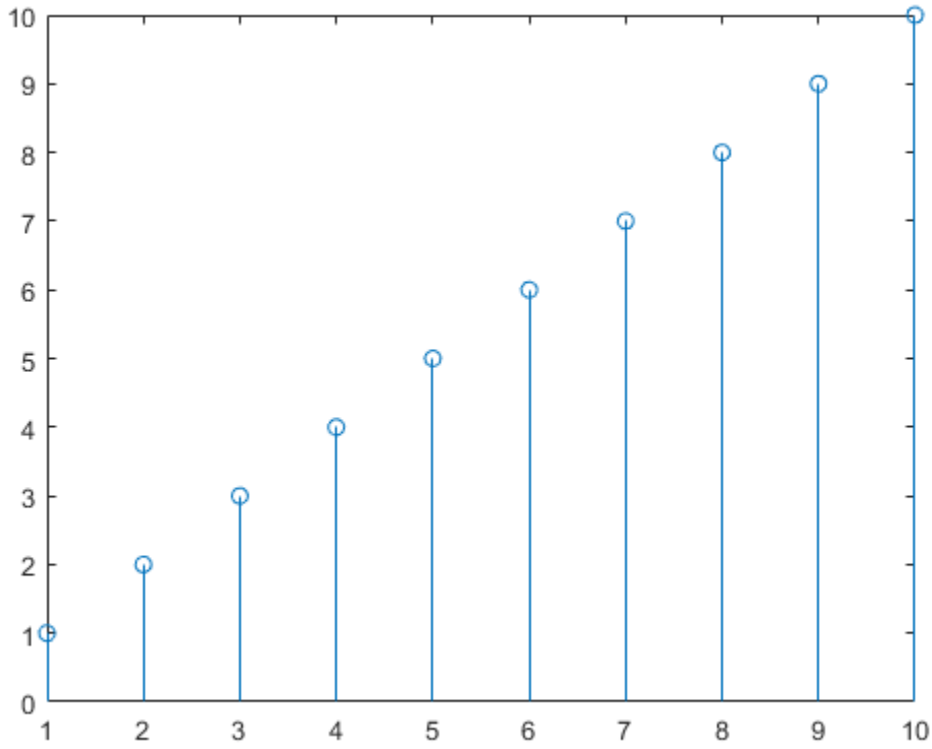

Remove *x*-Axis Tick Labels

Remove the tick labels along the *x*-axis by specifying the tick labels as an empty array.

```
plot(rand(5))
xticklabels({})
```

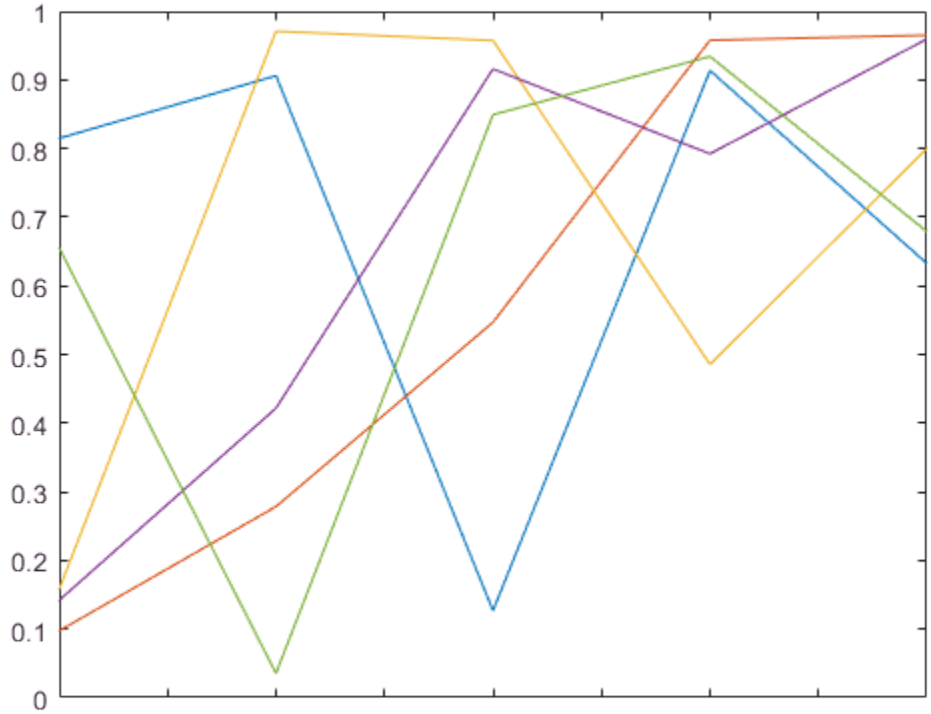

- "Specify Axis Tick Values and Labels"

Input Arguments

`labels` — Tick labels

cell array of character vectors

Tick labels, specified as a cell array of character vectors. If you do not want tick labels to show, then specify an empty cell array `{}`. Tick labels support TeX and LaTeX markup. See the TickLabelInterpreter property of the `Axes` object for more information.

Example: `xticklabels({'0','\pi','2\pi'})`

Example: `xticklabels({'January','Febrary','March'})`

Example: `xticklabels({})`

Note: To specify the tick values, use the `xticks` function.

`ax` — Target axes

current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `xticklabels` uses the current axes.

Output Arguments

`xl` — Current tick labels

cell array of character vectors | character matrix

Current tick labels, returned as a cell array of character vectors or a character matrix.

`m` — Current tick labels mode

`'auto'` | `'manual'`

Current tick labels mode, returned as one of these values:

- `'auto'` — Automatically determine the *x*-axis tick labels.
- `'manual'` — Use manually specified *x*-axis tick labels.

Definitions

Tick Labels

The tick labels are the labels that you see next to each tick mark. The tick values are the locations along the *x*-axis where the tick marks appear. Set the values using the `xticks` function. Set the corresponding labels using the `xticklabels` function.

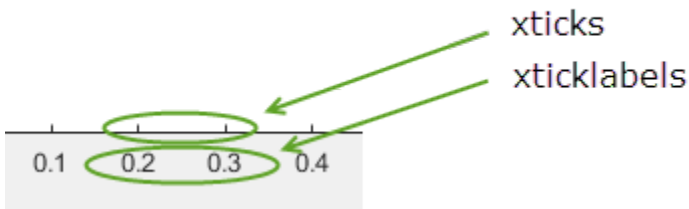

Algorithms

The `xticklabels` function sets and queries several axes properties related to the *x*-axis tick labels.

- XTickLabel — Property that stores the text for the *x*-axis tick labels.
- XTickLabelMode — Property that stores the *x*-axis tick label mode. When you set the *x*-axis tick labels using `xticklabels`, this property changes to `'manual'`.
- XTickMode — Property that stores the *x*-axis tick value mode. When you set the *x*-axis tick labels using `xticklabels`, this property changes to `'manual'`.

See Also

See Also

Functions
`xlim` | `xtickangle` | `xtickformat` | `xticks` | `yticklabels` | `zticklabels`

Properties
Axes Properties

Topics
"Specify Axis Tick Values and Labels"

Introduced in R2016b

xticks

Set or query *x*-axis tick values

Syntax

```
xticks(ticks)
xt = xticks

xticks('auto')
xticks('manual')
m = xticks('mode')

___ = xticks(ax, ___ )
```

Description

`xticks(ticks)` sets the *x*-axis tick values, which are the locations along the *x*-axis where the tick marks appear. Specify `ticks` as a vector of increasing values; for example, `[0 2 4 6]`. This command affects the current axes.

`xt = xticks` returns the current *x*-axis tick values as a vector.

`xticks('auto')` sets an automatic mode, enabling the axes to determine the *x*-axis tick values. Use this option if you change the tick values and then want to set them back to the default values.

`xticks('manual')` sets a manual mode, freezing the *x*-axis tick values at the current values. Use this option if you want to retain the current tick values when resizing the axes or adding new data to the axes.

`m = xticks('mode')` returns the current *x*-axis tick values mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify tick values or change the mode to manual.

`___ = xticks(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes.

Examples

Specify *x*-Axis Tick Values and Labels

Create a line plot. Display tick marks along the *x*-axis at the values 0, 5, and 10. Then specify a label for each tick mark.

```
x = linspace(0,10);
y = x.^2;
plot(x,y)
xticks([0 5 10])
xticklabels({'x = 0','x = 5','x = 10'})
```

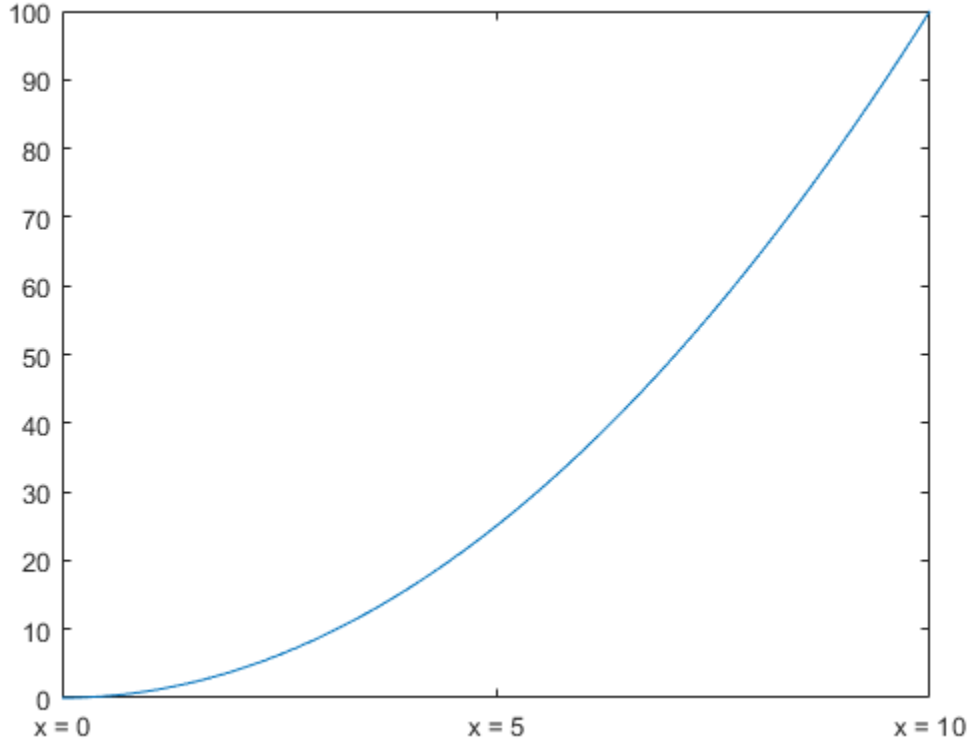

Specify Nonuniform *x*-Axis Tick Values

Display tick marks along the *x*-axis at nonuniform values between -5 and 5. MATLAB® labels the tick marks with the numeric values.

```
x = linspace(-5,5);
y = x.^2;
plot(x,y)
xticks([-5 -2.5 -1 0 1 2.5 5])
```

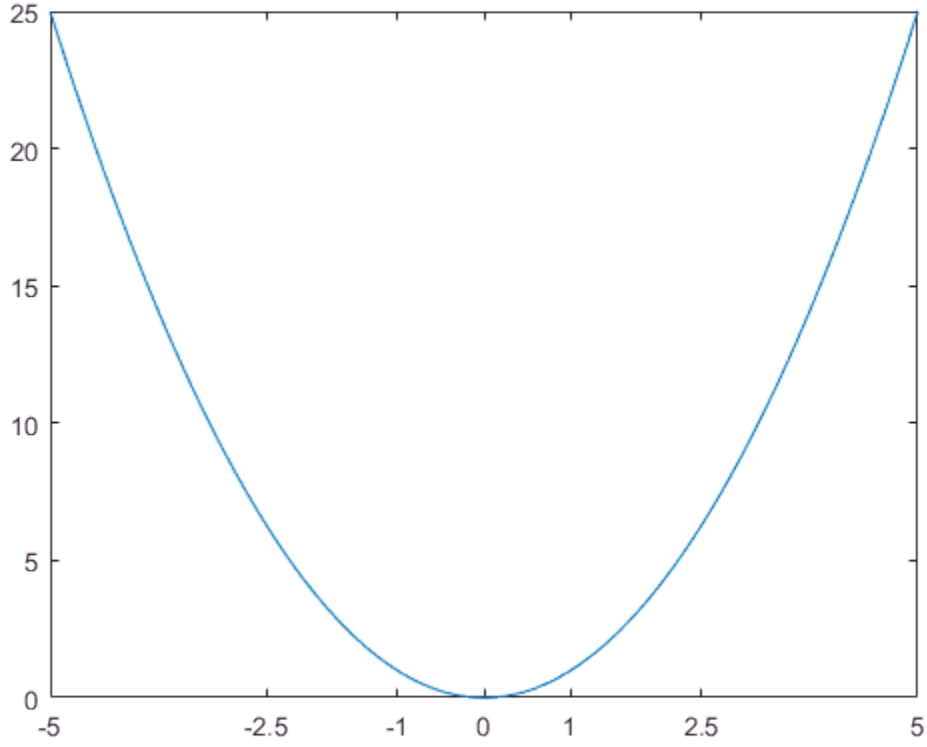

Increment *x*-Axis Tick Values by 10

Display tick marks along the *x*-axis at increments of 10, starting from 0 and ending at 50.

```
x = linspace(0,50);
y = sin(x/2);
plot(x,y)
xticks(0:10:50)
```

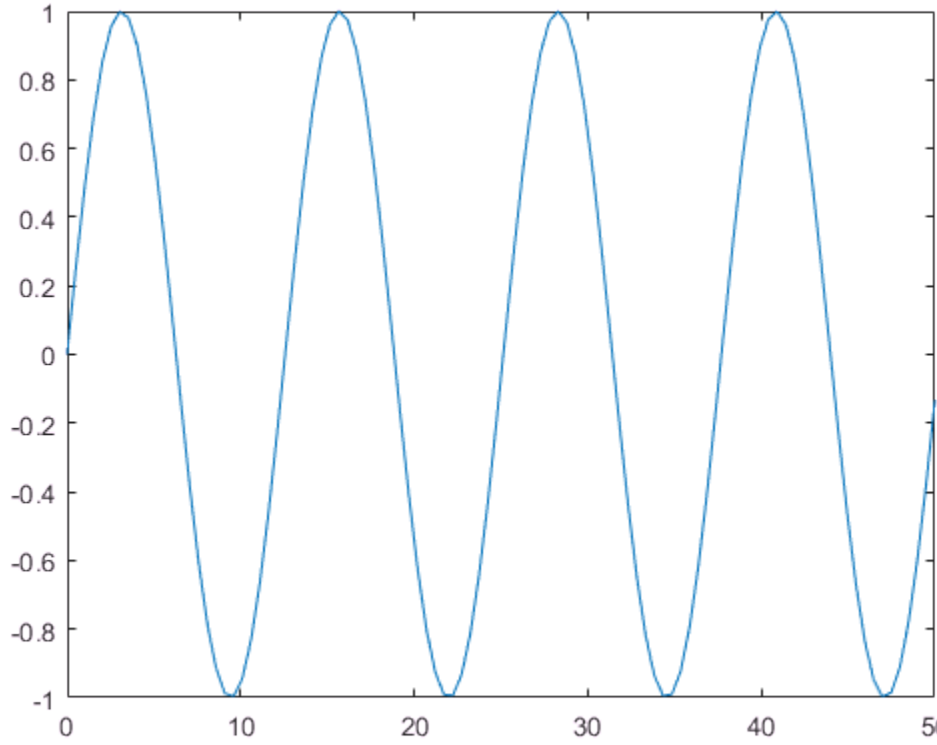

Increment *x*-Axis Tick Values by Pi

Create a line plot. Specify the *x*-axis limits as 0 to 6π. Then, display tick marks along the *x*-axis at increments of π.

```
x = linspace(0,6*pi);
y = sin(x);
plot(x,y)
xlim([0 6*pi])
xticks(0:pi:6*pi)
```

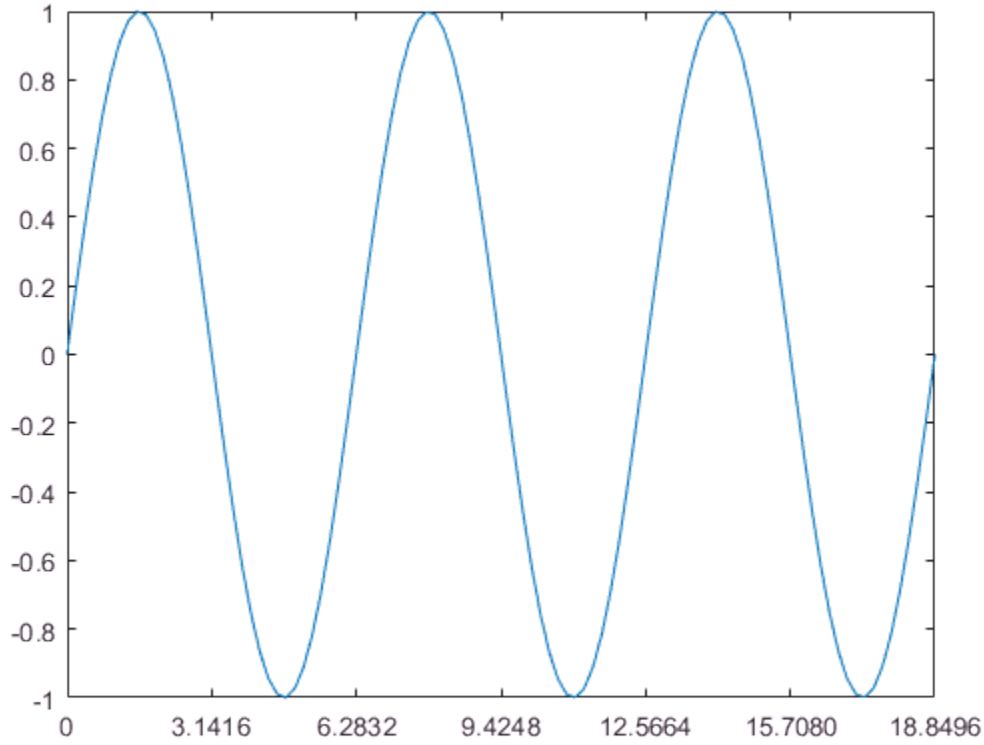

MATLAB® labels the tick marks with the numeric values. Change the labels to show the π symbol by specifying the text for each label.

```
xticklabels({'0','\pi','2\pi','3\pi','4\pi','5\pi','6\pi'})
```

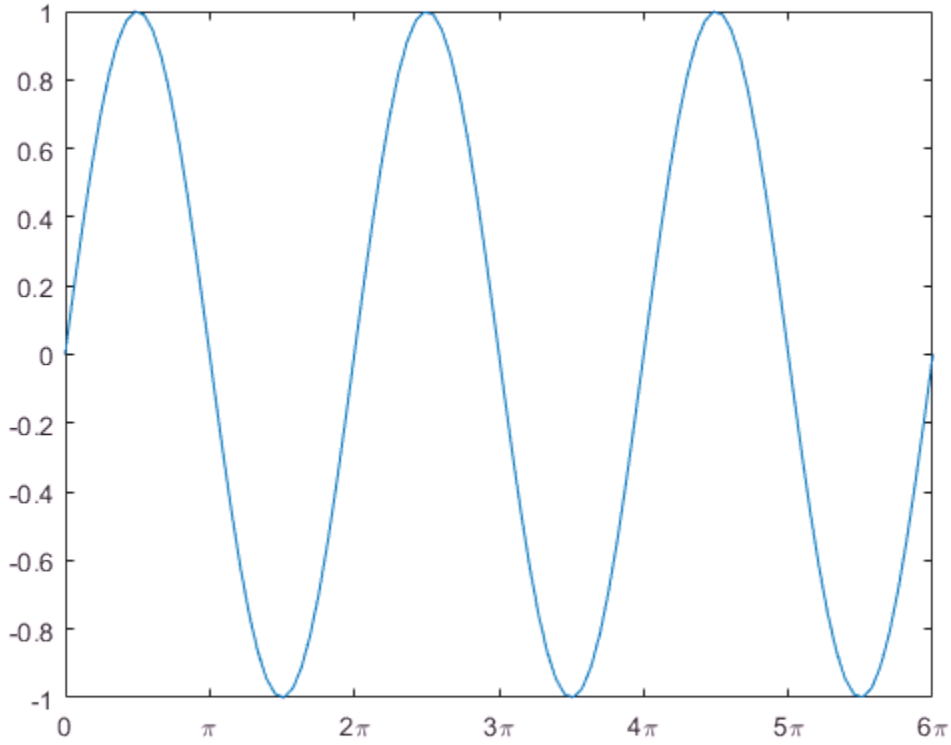

Change Tick Values for *x*-Axis with Durations

Create a plot with duration values along the *x*-axis. Then, change the duration values where the tick marks are located.

```
t = minutes(0:.5:3);
y = rand(1,7);
plot(t,y)
```

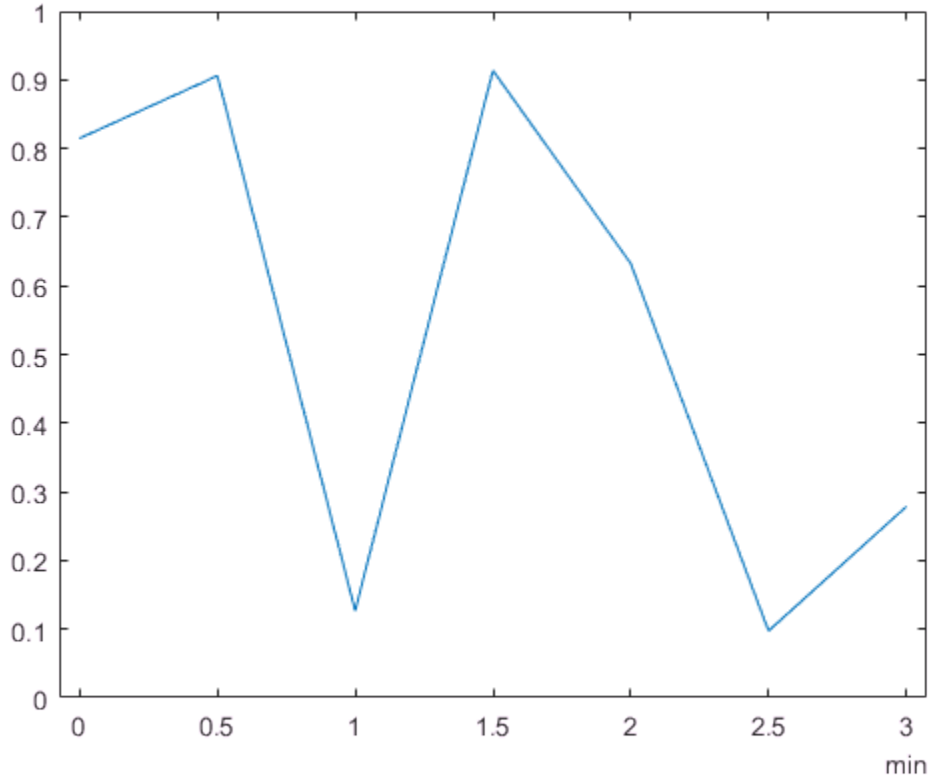


```
ticks = minutes(0:.25:3);
xticks(ticks)
```

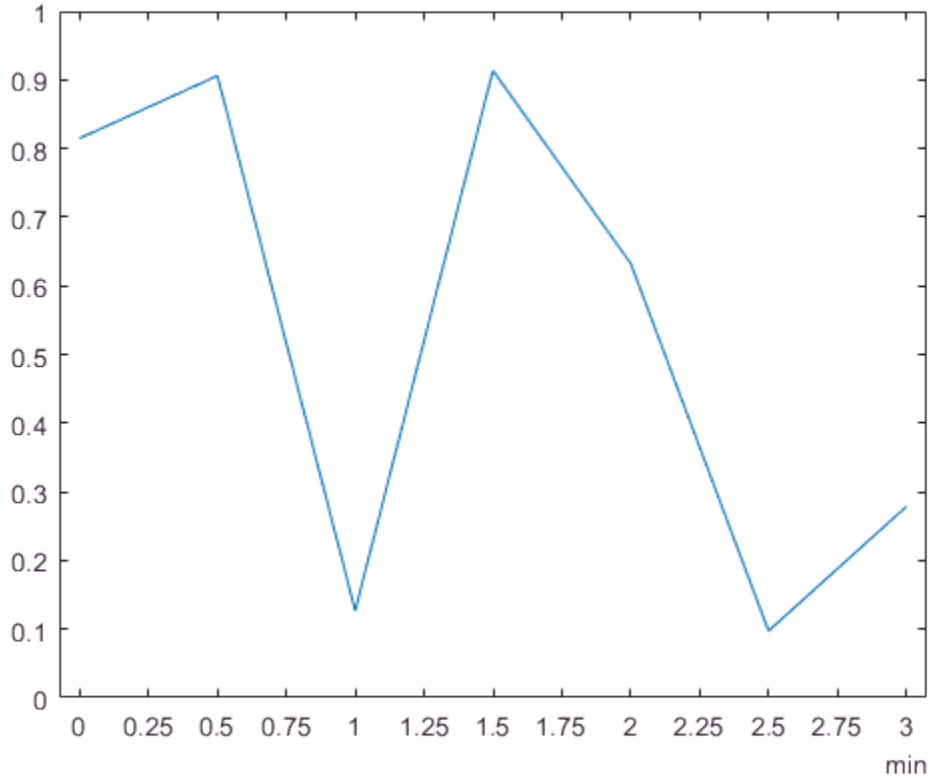

Set *x*-Axis Tick Values Back to Default Values

Create a stem chart and specify the *x*-axis tick values. Then, set the *x*-axis tick values back to the default values.

```
stem(1:10)
xticks([0 4 6 10])
```

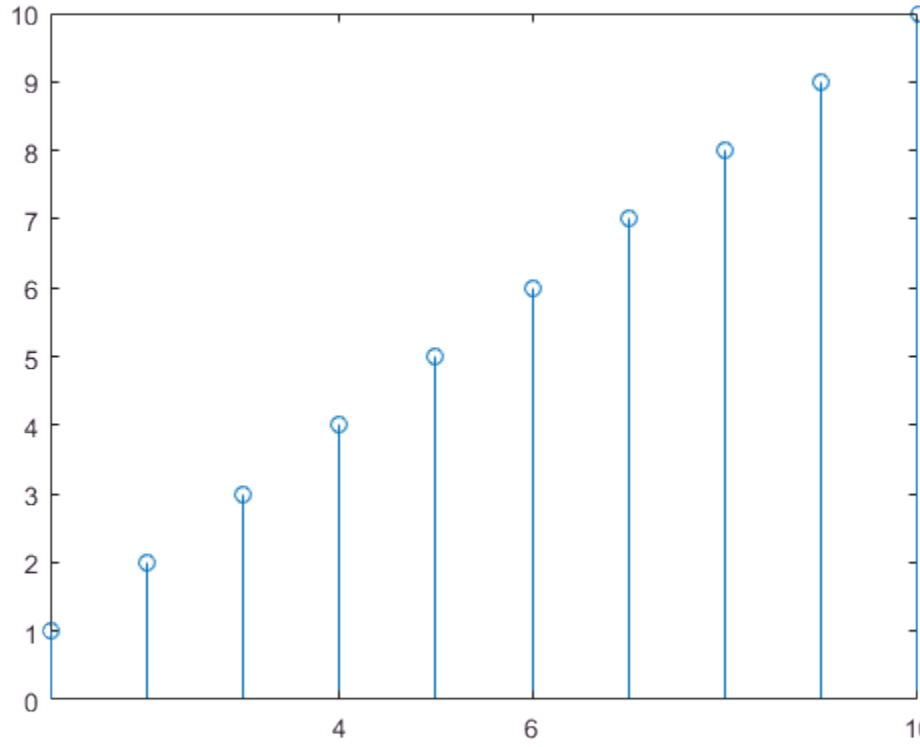


```
xticks('auto')
```

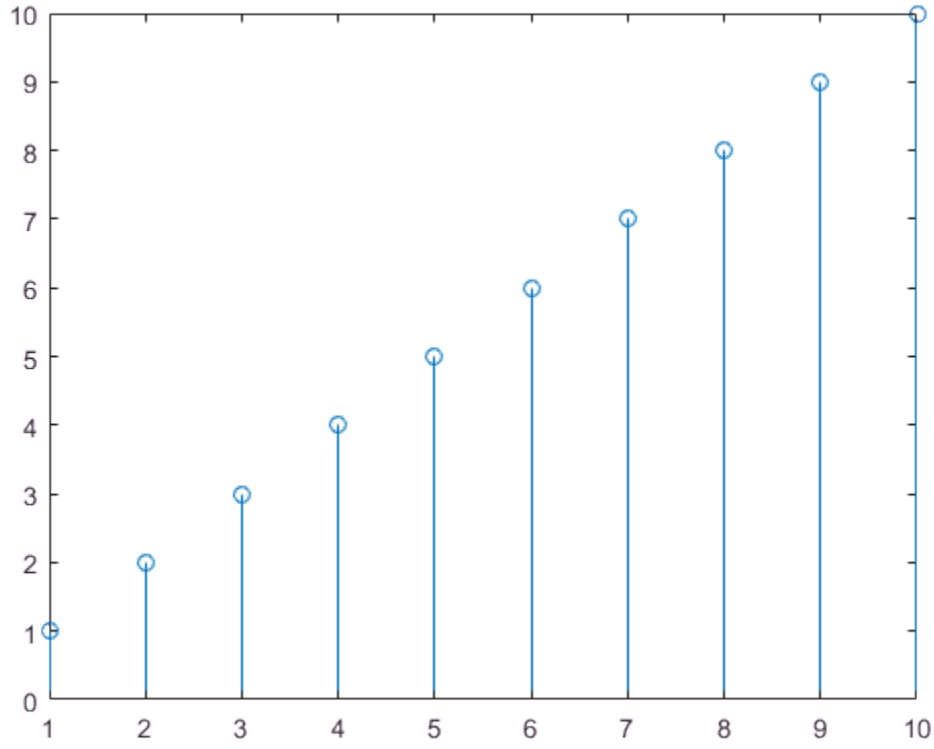

Specify *x*-Axis Tick Values for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Plot random data in each subplot. Set the *x*-axis tick values for the lower subplot by passing `ax2` as the first input argument to the `xticks` function.

```
ax1 = subplot(2,1,1);
plot(rand(3))
ax2 = subplot(2,1,2);
plot(rand(3))
xticks(ax2,[1 2 3])
```

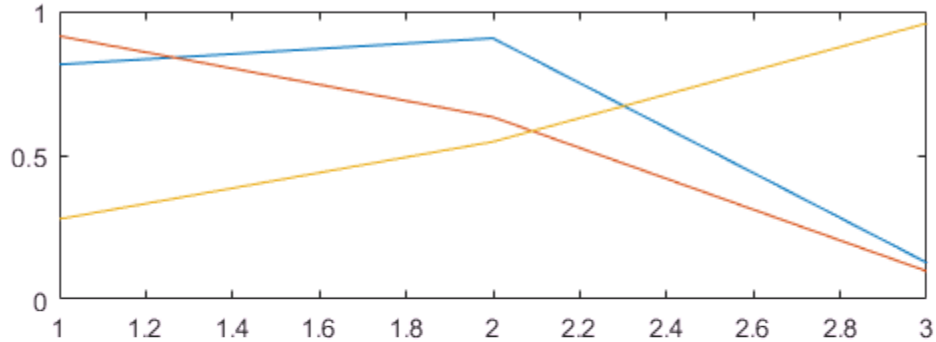

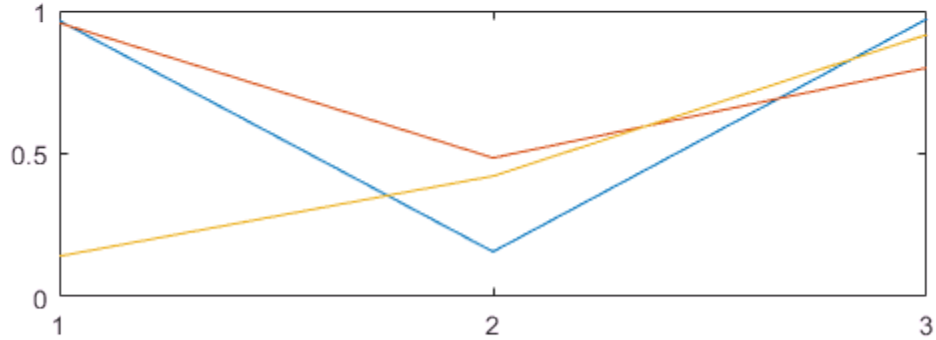

Remove *x*-Axis Tick Marks

Remove the tick marks along the *x*-axis by specifying the tick values as an empty array.

```
x = linspace(0,10);
y = sin(x);
plot(x,y)
xticks([])
```

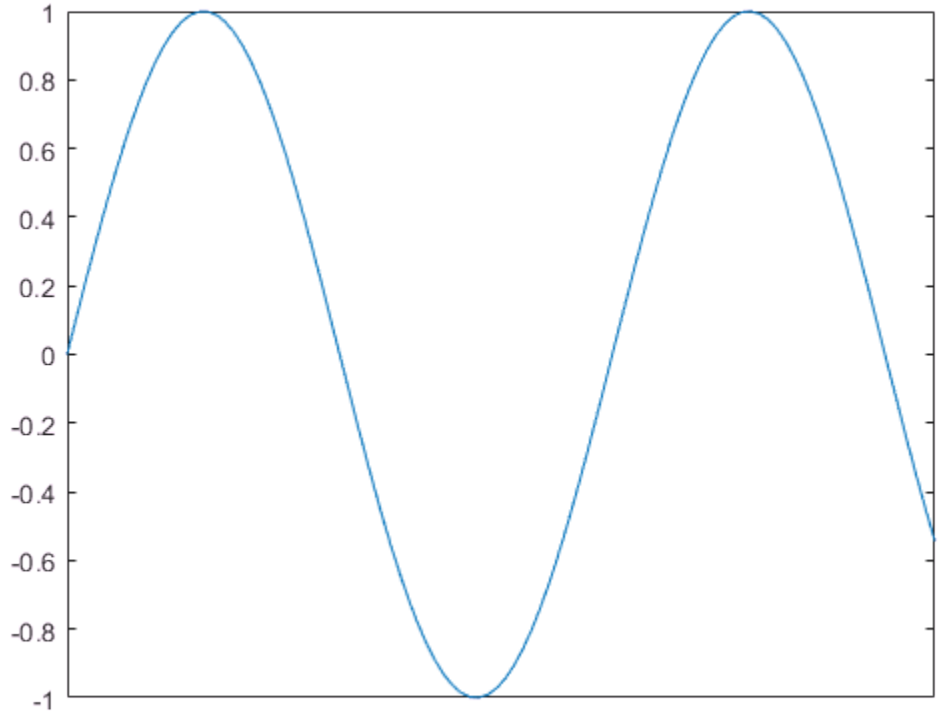

- "Specify Axis Tick Values and Labels"

Input Arguments

`ticks` — Tick values

vector of increasing values

Tick values, specified as a vector of increasing values. If you do not want tick marks along the *x*-axis, specify an empty vector `[ ]`.

You can specify the tick values as numeric, categorical, datetime, or duration values. However, the type of values that you specify must match the type of values along the *x*-axis.

Example: `xticks([pi 2*pi 3*pi 4*pi])`

Example: `xticks(0:10:100)`

Example: `xticks([])`

Note: To specify the tick labels, use the `xticklabels` function.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ax` — Target axes

current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `xticks` uses the current axes.

Output Arguments

`xt` — Current tick values

vector

Current tick values, returned as a vector.

`m` — Current mode

`'auto'` | `'manual'`

Current mode, returned as one of these values:

- `'auto'` — Automatically determine the *x*-axis tick values.
- `'manual'` — Use manually specified *x*-axis tick values.

Definitions

Tick Values

The tick values are the locations along the *x*-axis where the tick marks appear. The tick labels are the labels that you see next to each tick mark. Set the values using the `xticks` function. Set the corresponding labels using the `xticklabels` function.

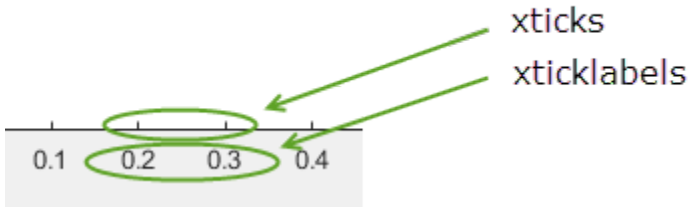

Algorithms

The `xticks` function sets and queries several axes properties related to the *x*-axis tick values.

- XTick — Property that stores the *x*-axis tick values.
- XTickMode — Property that stores the *x*-axis tick value mode. When you set the *x*-axis tick values, this property changes to `'manual'`.

See Also

See Also

Functions

`xlim` | `xtickangle` | `xtickformat` | `xticklabels` | `yticks` | `zticks`

Properties

Axes Properties

Topics

"Specify Axis Tick Values and Labels"

Introduced in R2016b

matlab.wsdl.createWSDLClient

Create interface to SOAP-based web service

Syntax

```
matlab.wsdl.createWSDLClient(wsdlURL)
matlab.wsdl.createWSDLClient(wsdlURL,folder)
matlab.wsdl.createWSDLClient(wsdlURL,folder,'silent')
```

```
matlab.wsdl.createWSDLClient( ___ ,options)
```

```
classname = matlab.wsdl.createWSDLClient( ___ )
```

Description

`matlab.wsdl.createWSDLClient(wsdlURL)` creates an interface to a service based on a Web Services Description Language (WSDL) document specified by `wsdlURL`. This function creates a MATLAB class file for each Simple Object Access Protocol (SOAP) binding in the WSDL in the current folder. If necessary, the function creates additional support files. You can package and distribute these files to other users.

You must install the WSDL tools, Java JDK™ and Apache™ CXF software, then set the tool paths using the `matlab.wsdl.setWSDLToolPath` function.

You must have write permission for the current folder.

`matlab.wsdl.createWSDLClient(wsdlURL,folder)` creates the interface files in `folder`, which must be on the MATLAB path.

`matlab.wsdl.createWSDLClient(wsdlURL,folder,'silent')` suppresses display of generated files and folders.

`matlab.wsdl.createWSDLClient( ___ ,options)` specifies additional information needed to access the WSDL document. You can use this syntax with any of the input arguments of the previous syntaxes.

`classname = matlab.wsdl.createWSDLClient( ___ )` returns a handle to the created class. If multiple classes were created, the function returns a cell array of

handles. You can use this syntax with any of the input arguments of the previous syntaxes.

To get information on using the class, call the MATLAB `help` function on the class name.

Examples

Get Map Name from `USGSImageryOnly_MapServer` Web Service

To run this example, install the WSDL tools and set the tool paths. `jdk` and `cxf` are the paths to these tools on your system.

```
matlab.wsdl.setWSDLToolPath('JDK',jdk,'CXF',cxf)
```

Create the class files.

```
url = ...
'http://basemap.nationalmap.gov/arcgis/services/USGSImageryOnly/MapServer?wsdl';
matlab.wsdl.createWSDLClient(url)
```

```
Created USGSImageryOnly_MapServer.
  .\USGSImageryOnly_MapServer.m
  .\+wsdl

In order to use USGSImageryOnly_MapServer, you must run javaaddpath('.\+wsdl\mapserver
```

Add the jar files to the Java path.

```
javaaddpath('.\+wsdl\mapserver.jar')
```

Create the service.

```
wsdl = USGSImageryOnly_MapServer;
```

Read help for the service and its functions.

```
help USGSImageryOnly_MapServer
```

```
USGSImageryOnly_MapServer   A client to connect to the USGSImageryOnly_MapServer servic
     SERVICE = USGSImageryOnly_MapServer  connects to http://basemap.nationalmap.gov/ar

     To communicate with the service, call a function on the SERVICE:
```

```
    [...] = FUNCTION(SERVICE,arg,...)

See doc USGSImageryOnly_MapServer for a list of functions.
```

Call one of the methods, for example `GetDefaultMapName` that returns the map name.

```
GetDefaultMapName(wsdl)
```

```
ans =

Layers
```

- "Set Up WSDL Tools"

Input Arguments

`wsdlURL` — WSDL URL or file path

character vector

WSDL URL or file path, specified as a character vector, that defines service methods, arguments, and transactions.

`wsdlURL` can be an `http` or `https` URL or a local path. `wsdlURL` cannot be a `file://` URL. On Microsoft Windows, UNC paths are not supported.

Example: `'http://www.mywebservice.com/servicename?WSDL'`

`folder` — Folder for generated files

character vector

Folder for generated files, specified as a character vector. If omitted or empty (`''`), `matlab.wsdl.createWSDLClient` uses the current folder. You must have write permission for the folder. The function overwrites existing files with the same names as the generated files.

Example: `'c:\work'`

`options` — Additional options

`weboptions` object

Additional options, specified as a `weboptions` object, needed to access the WSDL document, such as `Username`, `Password`, and `Timeout`.

The additional options specified in `weboptions` do not apply to any other documents, such as other imported WSDL documents or schemas, that the primary WSDL document references. The options also do not apply to requests made to servers by the generated code.

Example: `'Username','john','Password','mypassword'`

Limitations

- "Limitations to WSDL Document Support"

Tips

- If you create WSDL files in multiple locations on your computer, avoid confusion by deleting the class files from duplicate locations, and then call `clear java`.

See Also

See Also

`clear` | `createClassFromWsdl` | `matlab.wsdl.setWSDLToolPath` | `weboptions` | `webread`

Topics

"Set Up WSDL Tools"

Introduced in R2014b

matlab.wsdl.setWSDLToolPath

Location of WSDL tools

Syntax

```
matlab.wsdl.setWSDLToolPath(Name,Value)
```

```
paths = matlab.wsdl.setWSDLToolPath
```

Description

`matlab.wsdl.setWSDLToolPath(Name,Value)` sets the paths to Java JDK and Apache CXF software. You must download these tools to use the `matlab.wsdl.createWSDLClient` interface.

Specify values for both `Name` arguments `'JDK'` and `'CXF'` before calling `matlab.wsdl.createWSDLClient`. The values are saved across sessions in your user preferences.

`paths = matlab.wsdl.setWSDLToolPath` displays paths to the JDK and CXF software.

Examples

Set Path to Tools

Set `jdk` and `cxf` to valid paths on your system. For example,

```
jdk = 'E:/Program Files/win64/jdk';
cxf = 'c:\apache-cxf-2.7.10'
matlab.wsdl.setWSDLToolPath('JDK',jdk,'CXF',cxf)
```

Check If Tool Paths Are Set

```
p = matlab.wsdl.setWSDLToolPath;
if (isempty(p.JDK) || isempty(p.CXF))
    disp('Install the Java Development Kit (JDK) and Apache CXF programs.')
    disp('See the Set Up WSDL Tools example link at the end of this page.')
```

```
else
    disp('Paths set to:')
    matlab.wsdl.setWSDLToolPath
end
```

- "Set Up WSDL Tools"

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'CXF','C:\apache-cxf-2.7.10'`

`'JDK'` — Path to Java JDK software
character vector

Path to Java Development Kit (JDK) software, specified as a character vector. Download the software from `http://www.oracle.com/technetwork/java/javase/downloads` and choose release 7u75.

Example: `'E:/Program Files/win64/jdk'`

`'CXF'` — Path to Apache CXF software
character vector

Path to Apache CXF software, specified as a character vector. CXF is an open-source services framework. Download the software from `http://cxf.apache.org/download` and choose the latest release of 2.7.

Example: `'C:\apache-cxf-2.7.10'`

Output Arguments

`paths` — Tool paths
structure

Tool paths, returned as a structure with the fields:

JDK — Path to Java JDK software
character vector

Path to Java JDK software, specified as a character vector. If the value of `JDK` is empty, you cannot call `matlab.wsdl.createWSDLClient`.

CXF — Path to Apache CXF software
character vector

Path to Apache CXF software, specified as a character vector. If the value of `CXF` is empty, you cannot call `matlab.wsdl.createWSDLClient`.

See Also

See Also
`matlab.wsdl.createWSDLClient`

Topics
"Set Up WSDL Tools"

External Websites
http://www.oracle.com/technetwork/java/javase/downloads
http://cxf.apache.org/download

Introduced in R2014b

year

Year number

Syntax

```
y = year(t)
y = year(t,yearType)
```

Description

`y = year(t)` returns the ISO year numbers for the datetime values in `t`. ISO year numbers include a year zero and represent years BCE using negative values. The `y` output is a `double` array the same size as `t`.

`y = year(t,yearType)` returns the type of year number specified by `yearType`.

The `year` function returns the year numbers of datetime values. To assign ISO year values to a datetime array, `t`, use `t.Year` and modify the Year property.

Examples

Extract Year Number from Dates

Extract the year numbers from an array of dates.

```
t = datetime(2010,05,31):calyears(1):datetime(2015,02,28)
```

```
t = 1×5 datetime array
   31-May-2010   31-May-2011   31-May-2012   31-May-2013   31-May-2014
```

```
y = year(t)
```

```
y =

        2010        2011        2012        2013        2014
```

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

`yearType` — Type of year values

`'iso'` (default) | `'gregorian'`

Type of year values, specified as either `'iso'` or `'gregorian'`.

- If `yearType` is `'iso'`, then `year` returns the ISO year number, which includes a year zero and represents years BCE using negative values.
- If `yearType` is `'gregorian'`, then `year` returns the Gregorian year number, which is an unsigned integer. For example, the Gregorian year number for 5 CE and 5 BCE is 5 in both cases. Gregorian year numbers do not have a year zero.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

datetime Properties | `day` | `month` | `quarter` | `week` | `ymd`

Introduced in R2014b

years

Duration in years

Syntax

```
Y = years(X)
```

Description

`Y = years(X)` returns an array of years equivalent to the values in `X`.

- If `X` is a numeric array, then `Y` is a `duration` array in units of fixed-length years. A fixed-length year is equal to 365.2425 days.
- If `X` is a `duration` array, then `Y` is a `double` array with each element equal to the number of fixed-length years in the corresponding element of `X`.

The `years` function converts between `duration` and `double` values. To display a duration in units of years, set its `Format` property to `'y'`.

Examples

Create Duration Array of Fixed-Length Years

```
X = [1 3 5; 10 12 15]
```

```
X =

     1     3     5
    10    12    15
```

```
Y = years(X)
```

```
Y = 2×3 duration array
     1 yr    3 yrs    5 yrs
    10 yrs   12 yrs   15 yrs
```

Convert Durations to Numeric Array of Years

Find the difference between two arrays of dates. The output is a `duration` array.

```
t1 = datetime(2007:2010,10,1);
t2 = datetime(2014,05,1);
dt = t2 - t1
```

```
dt = 1×4 duration array
   57696:00:00   48912:00:00   40152:00:00   31392:00:00
```

Convert each duration in `dt` to a number of fixed-length years.

```
Y = years(dt)
```

```
Y =

    6.5819    5.5799    4.5805    3.5812
```

Input Arguments

X — Input array

numeric array | duration array | logical array

Input array, specified as a numeric array, duration array, or logical array.

Tips

- `years` creates fixed-length years. To create an array of calendar years that account for leap days when used in calendar calculations, use the `calyears` function.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`calyears`

Introduced in R2014b

ylabel

Label y-axis

Syntax

```
ylabel(txt)
ylabel(target,txt)

ylabel( ___ ,Name,Value)
t = ylabel( ___ )
```

Description

`ylabel(txt)` labels the *y*-axis of the current axes or chart returned by the `gca` command. Reissuing the `ylabel` command causes the new label to replace the old label.

`ylabel(target,txt)` adds the label to the axes or chart specified by `target`.

`ylabel( ___ ,Name,Value)` modifies the label appearance using one or more name-value pair arguments. For example, `'FontSize',12` sets the font size to 12 points. Specify name-value pair arguments after all other input arguments. Modifying the label appearance is not supported for all types of charts.

`t = ylabel( ___ )` returns the text object used as the *y*-axis label. Use `t` to make future modifications to the label after it is created.

Examples

Label y-Axis

```
plot((1:10).^2)
ylabel('Population')
```

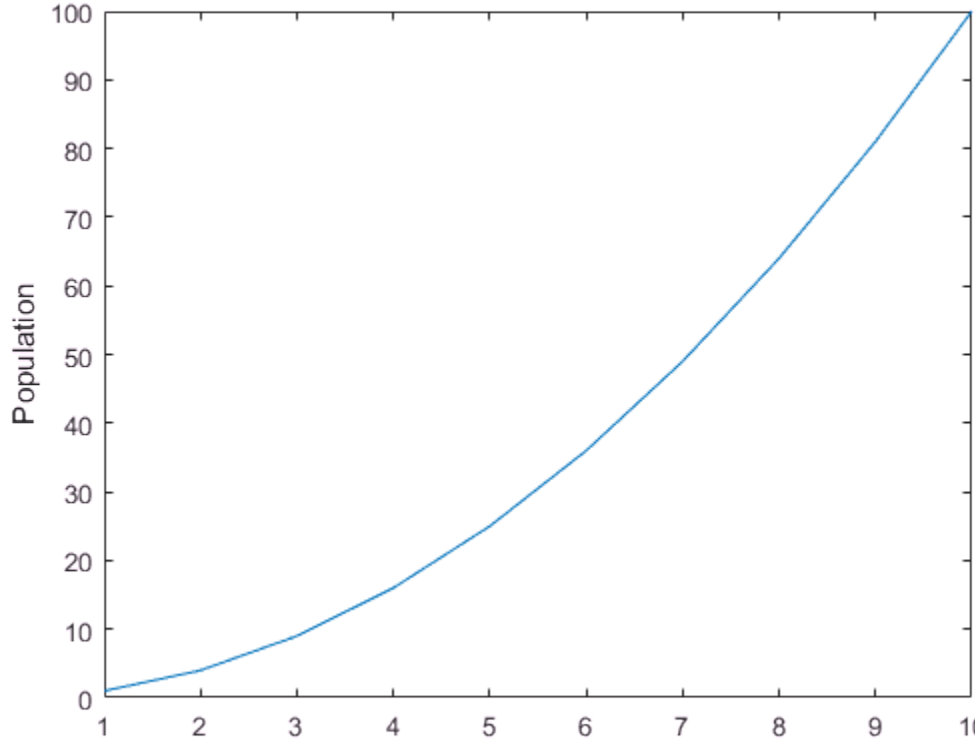

Label y-Axis with Numeric Input

```
figure
plot((1:10).^2)
ylabel(123)
```

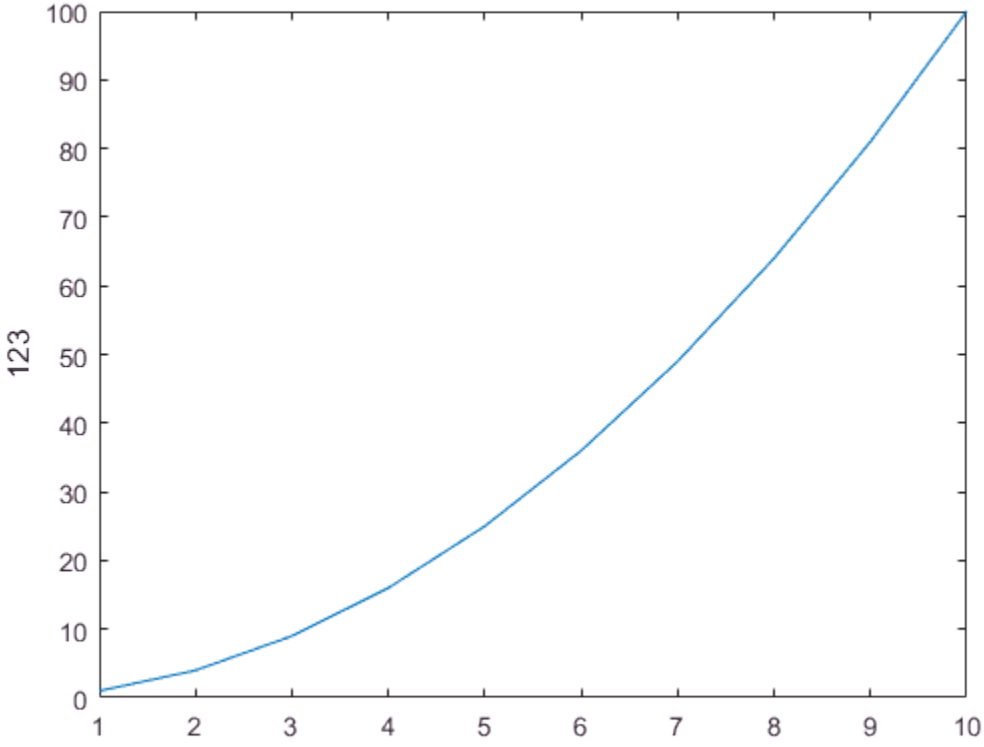

MATLAB® displays 123 beside the *y*-axis.

Create Multiline Label

Create a multiline label using a multiline cell array.

```
figure
plot((1:10).^2)
ylabel({2010;'Population';'in Years'})
```

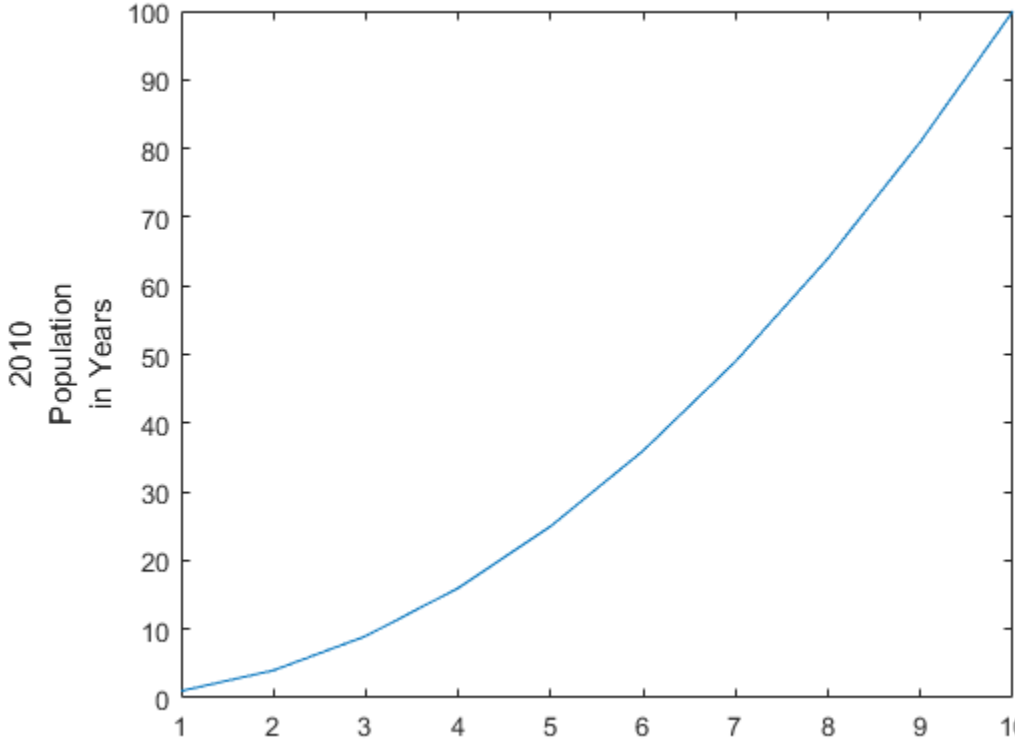

Include Superscript and Subscript in Axis Labels

Use the `'^'` and `'_'` characters to include superscripts and subscripts in the axis labels. Use curly braces `{}` to modify more than one character.

```
t = linspace(0,1);
y = exp(t);
plot(t,y)
xlabel('t_{seconds}')
ylabel('e^t')
```

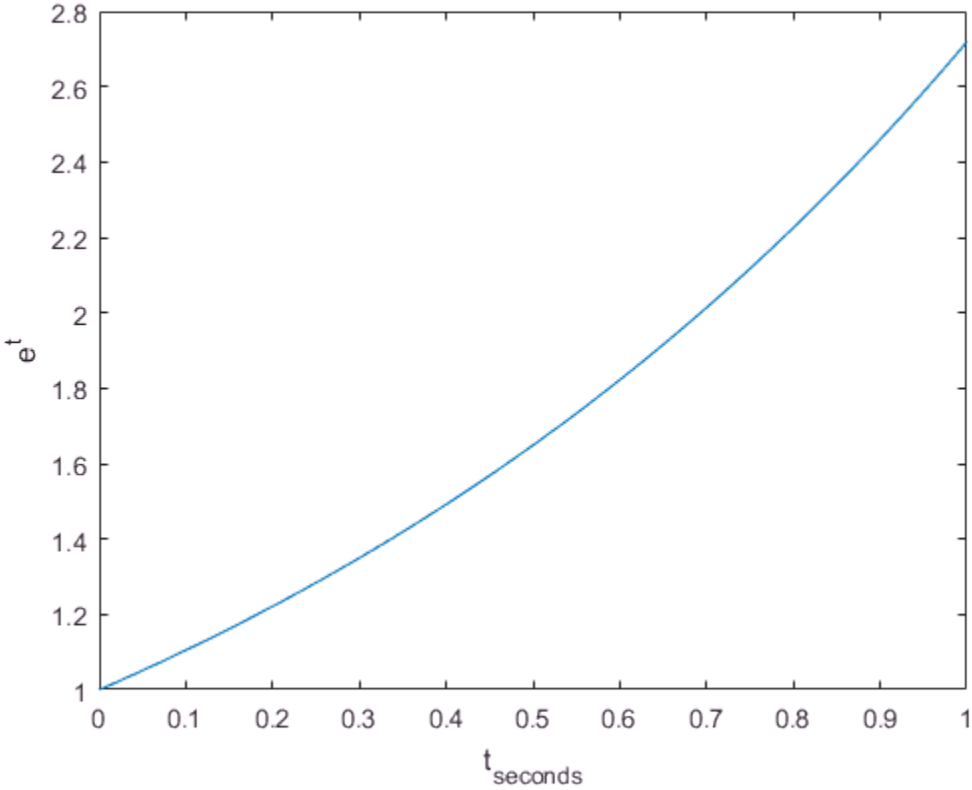

Create y-Axis Label and Set Font Properties

Use `Name,Value` pairs to set the font size, font weight, and text color properties of the *y*-axis label.

```
figure
plot((1:10).^2)
ylabel('Population','FontSize',12,...
       'FontWeight','bold','Color','r')
```

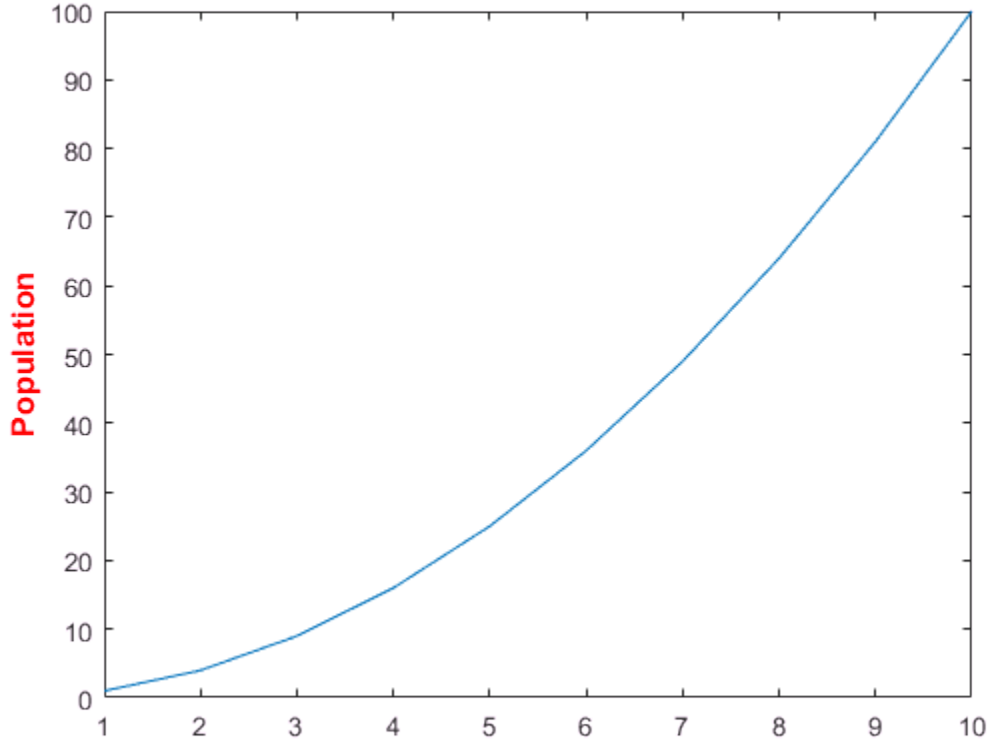

`'FontSize',12` displays the label text in 12-point font. `'FontWeight','bold'` makes the text bold. `'Color','r'` sets the text color to red.

Label y-Axis of Specific Axes

Create two subplots and return the axes handles, `s(1)` and `s(2)`.

```
figure
s(1) = subplot(2,1,1);
plot((1:10).^2)
s(2) = subplot(2,1,2);
plot((1:10).^3)
```

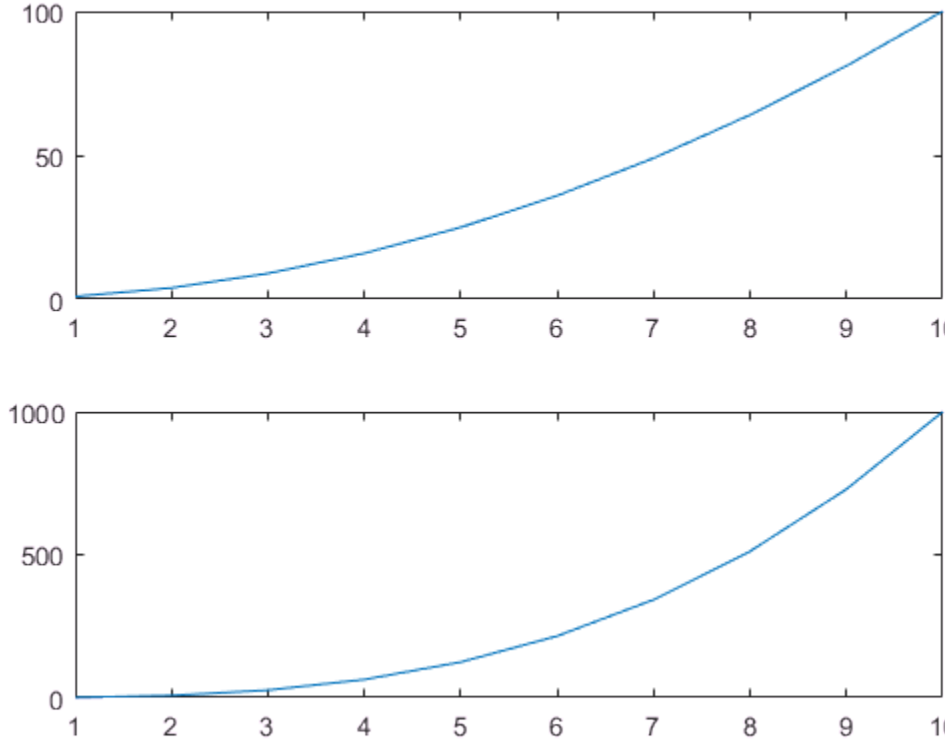

Label the *y*-axis of the top plot by referring to its axes handle, `s(1)`.

```
ylabel(s(1),'Population')
```

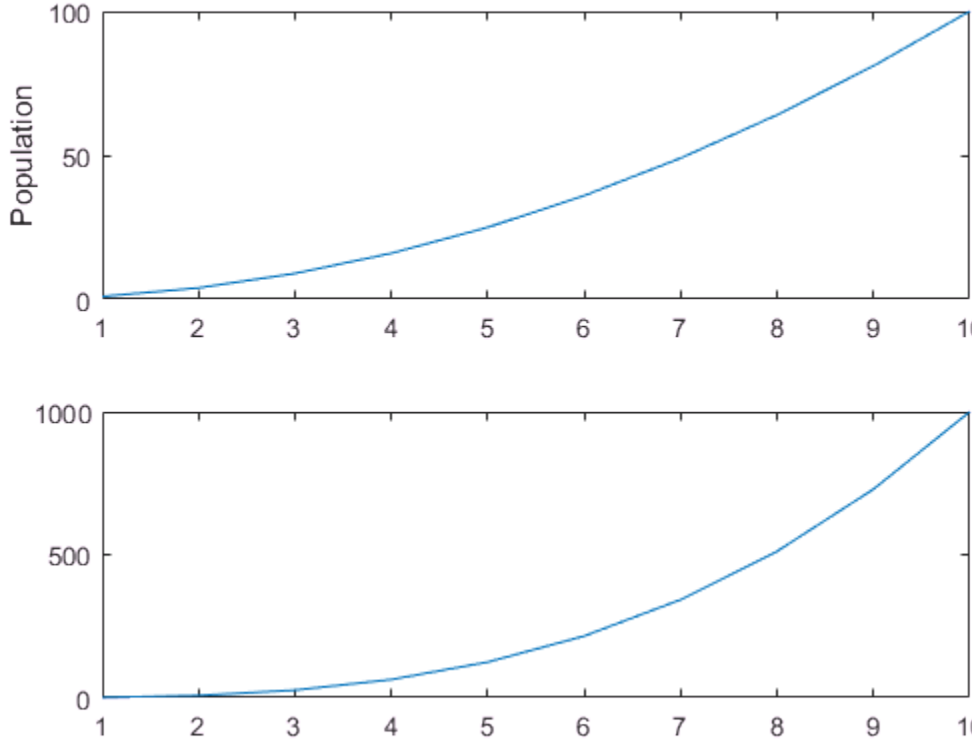

Label y-Axis and Return Object Handle

Label the *y*-axis and return the handle to the text object used as the label.

```
plot((1:10).^2)
t = ylabel('Population');
```

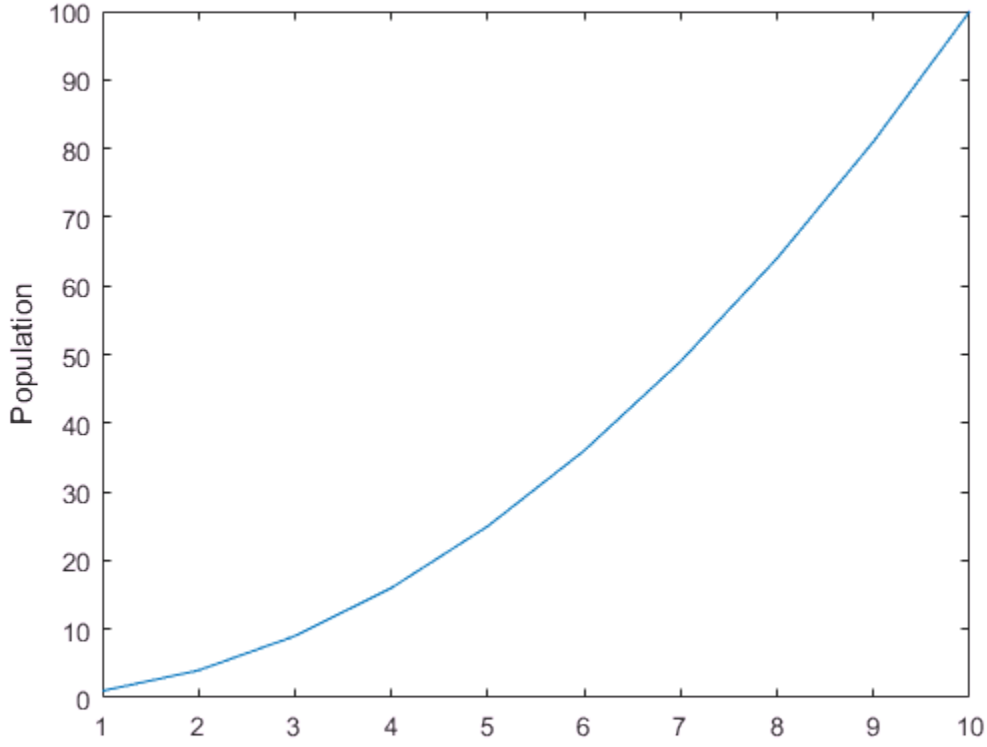

Set the color of the label to red. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
t.Color = 'red';
```

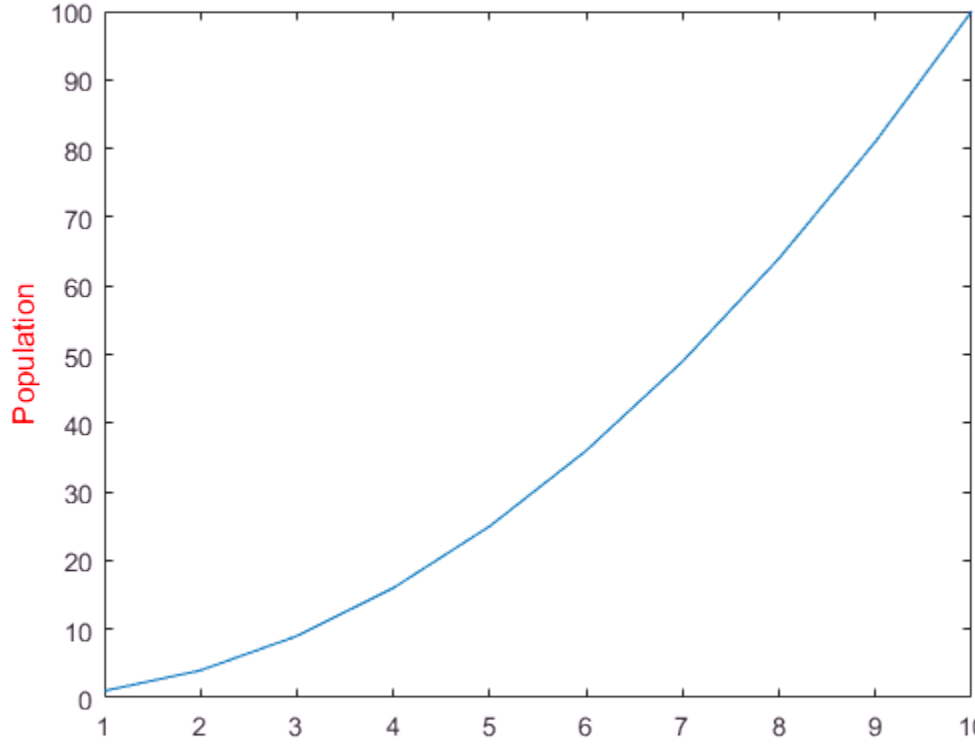

- "Add Text to Graph Interactively"

Input Arguments

`txt` — Axis label

character array | cell array | numeric value

Axis label, specified as a character array, cell array, or numeric value.

Example: `'my label'`

Example: `{'first line','second line'}`

Example: 123

To include numeric variables with text in a label, use the `num2str` function. For example:

```
x = 42;
txt = ['The value is ',num2str(x)];
```

To include special characters, such as superscripts, subscripts, Greek letters, or mathematical symbols use TeX markup. For a list of supported markup, see the `Interpreter` property.

To create multiline labels:

- Use a cell array, where each cell contains a line of text, such as `{'first line','second line'}`.
- Use a character array, where each row contains the same number of characters, such as `['abc'; 'ab ']`.
- Use `sprintf` to create text with a new line character, such as `sprintf('first line \n second line')`.

Numeric labels are converted to text using `sprintf('%g',value)`. For example, `12345678` displays as `1.23457e+07`.

Note: The words `default`, `factory`, and `remove` are reserved words that will not appear in a label when quoted as a normal characters. To display any of these words individually, precede them with a backslash, such as `'\default'` or `'\remove'`.

`target` — Target for label

`Axes` object | graphics object

Target for label, specified as an `Axes` object or a graphics object that has a `YLabel` property. For example, you can add a *y*-axis label to a `HeatmapChart` object.

If you do not specify the target, then the `ylabel` function adds the label to the graphics object returned by the `gca` command.

Note: Some charts do not support modifying the label appearance, such as the color, or returning the text object as an output argument.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Color','red','FontSize',12` specifies red, 12-point font.

In addition to the following, you can specify other text object properties using `Name,Value` pair arguments. See Text Properties.

`'FontSize'` — Font size

`11` (default) | scalar value greater than `0`

Font size, specified as a scalar value greater than `0` in point units. One point equals 1/72 inch. To change the font units, use the FontUnits property.

Setting the font size properties for the associated axes also affects the label font size. The label font size updates to equal the axes font size times the label scale factor. The FontSize property of the axes contains the axes font size. The LabelFontSizeMultiplier property of the axes contains the label scale factor. By default, the axes font size is 10 points and the scale factor is 1.1, so the *y*-axis label font size is 11 points.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'FontWeight'` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

`'FontName'` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`'Color'` — Text color

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of color name, or `'none'`. If you set the color to `'none'`, then the text is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `'blue'`

Example: `[0 0 1]`

`'Interpreter'` — Interpretation of text characters
`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value	`'\fontsize{15} text'`

Modifier	Description	Example
	in point units to change the font size.	
`\color{specifier}`	Font color — Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒
`\lambda`	λ	`\Phi`	Φ	`\downarrow`	↓
`\mu`	μ	`\Psi`	Ψ	`\circ`	°

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

Output Arguments

`t` — Text object
text object

Text object used as the *y*-axis label. Use `t` to access and modify properties of the label after its created.

See Also

See Also

Functions
`num2str` | `text` | `title` | `xlabel` | `zlabel`

Properties
Text Properties

Topics
"Add Text to Graph Interactively"

Introduced before R2006a

ymd

Year, month, and day numbers of datetime

Syntax

```
[y,m,d] = ymd(t)
```

Description

`[y,m,d] = ymd(t)` returns the year, month, and day numbers of the datetime values in `t` as separate numeric arrays. The `y`, `m`, and `d` outputs are the same size as `t`, and contain integer values.

The `ymd` function is equivalent to calling the `year`, `month`, and `day` functions on the same datetime array.

Examples

Find Year, Month, and Day Numbers of Dates

```
t = datetime(2013,05,31):calmonths(3):datetime(2014,06,15)
```

```
t = 1×5 datetime array
   31-May-2013   31-Aug-2013   30-Nov-2013   28-Feb-2014   31-May-2014
```

```
[y,m,d] = ymd(t)
```

```
y =

        2013        2013        2013        2014        2014


m =

     5     8    11     2     5
```

```
d =

    31    31    30    28    31
```

`ymd` returns the year, month, and day values in separate arrays.

Input Arguments

`t` — Input date and time

`datetime` array

Input date and time, specified as a `datetime` array.

Output Arguments

`y` — ISO year numbers

scalar | vector | matrix | multidimensional array

ISO year numbers, returned as a scalar, vector, matrix, or multidimensional array of integer values. ISO year numbers include a year zero and represent years BCE using negative values. `y` is of type `double` and is the same size as `t`.

`m` — Month numbers

scalar | vector | matrix | multidimensional array

Month numbers, returned as a scalar, vector, matrix, or multidimensional array of integer values from 1 to 12. `m` is of type `double` and is the same size as `t`.

`d` — Day of month numbers

scalar | vector | matrix | multidimensional array

Day of month numbers, returned as a scalar, vector, matrix, or multidimensional array of integer values from 1 to 28, 29, 30, or 31, depending on the month and year. `d` is of type `double` and is the same size as `t`.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`day` | `hms` | `month` | `quarter` | `week` | `year`

Introduced in R2014b

ytickangle

Rotate *y*-axis tick labels

Syntax

```
ytickangle(angle)
ytickangle(ax,angle)

ang = ytickangle
ang = ytickangle(ax)
```

Description

`ytickangle(angle)` rotates the *y*-axis tick labels for the current axes to the specified angle in degrees, where `0` is horizontal. Specify a positive value for counterclockwise rotation or a negative value for clockwise rotation.

`ytickangle(ax,angle)` rotates the tick labels for the axes specified by `ax` instead of the current axes.

`ang = ytickangle` returns the rotation angle for the *y*-axis tick labels of the current axes as a scalar value in degrees. Positive values indicate counterclockwise rotation. Negative values indicate clockwise rotation.

`ang = ytickangle(ax)` uses the axes specified by `ax` instead of the current axes.

Examples

Rotate y-Axis Tick Labels

Create a stem chart and rotate the *y*-axis tick labels 90 degrees so that they appear vertically.

```
x = linspace(0,50,20);
```

```
y = x.^2;
stem(x,y)
ytickangle(90)
```

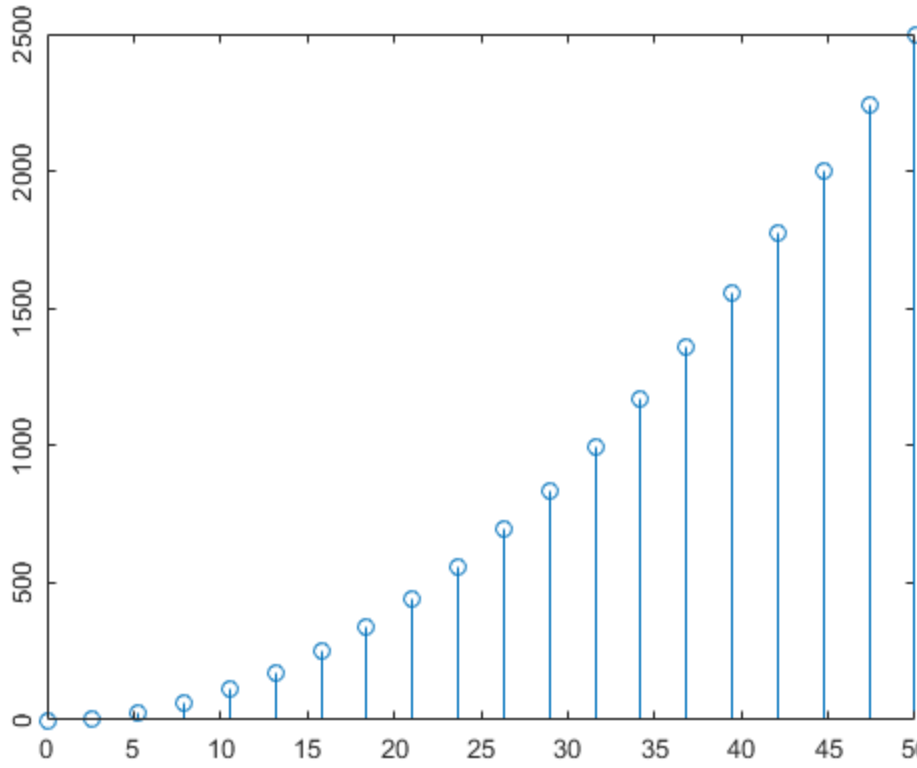

Rotate y-Axis Tick Labels for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Rotate the *y*-axis tick labels for the lower subplot by specifying `ax2` as the first input argument to `ytickangle`.

```
ax1 = subplot(2,1,1);
plot(rand(6))
```

```
ax2 = subplot(2,1,2);
plot(rand(6))
ytickangle(ax2,45)
```

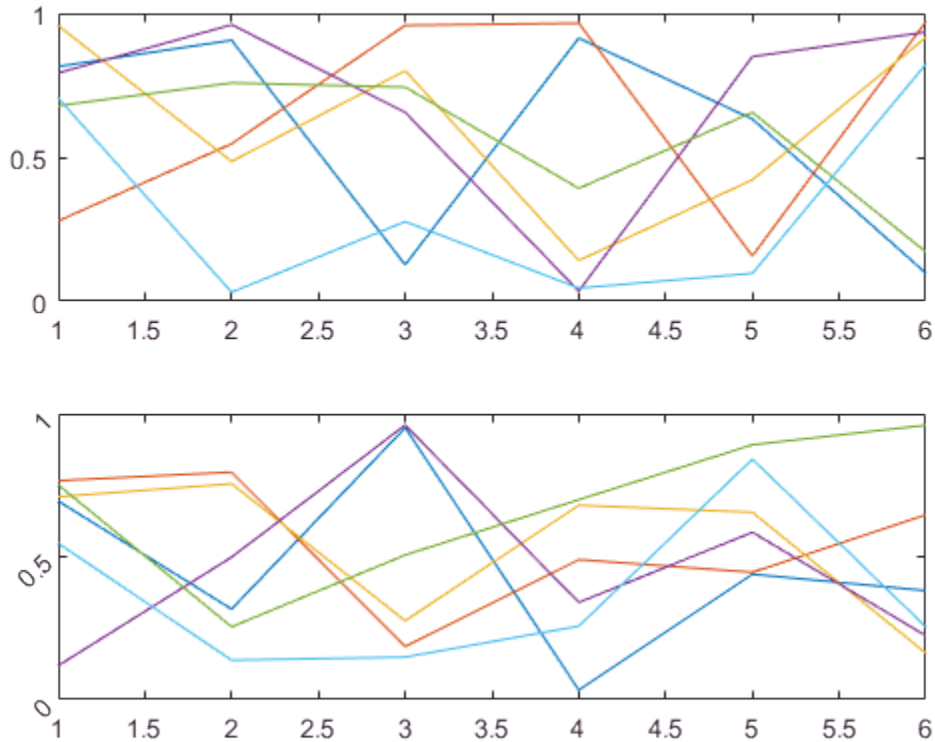

Query Current Angle for y-Axis Tick Labels

Create a stem chart. Then, query the rotation angle for the *y*-axis tick labels. By default, the labels are not rotated.

```
x = linspace(0,50,20);
y = x.^2;
stem(x,y)
```

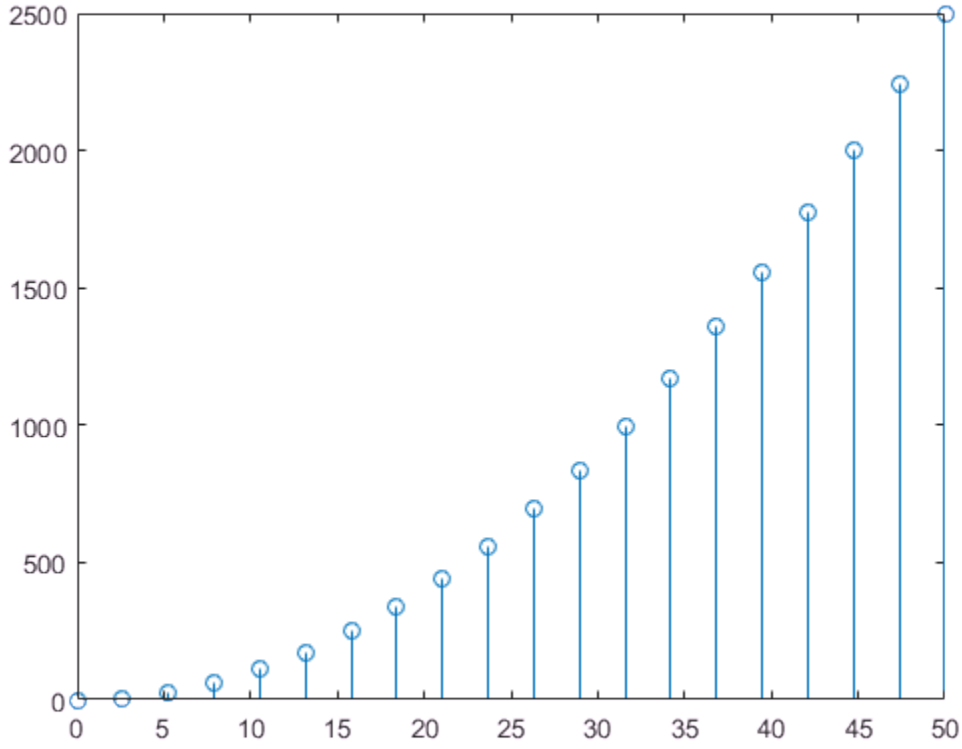


```
ang = ytickangle
```

```
ang = 0
```

Input Arguments

angle — Rotation of tick labels

0 (default) | scalar value in degrees

Rotation of tick labels, specified as a scalar value in degrees, where 0 is horizontal.

Example: `ytickangle(90)`

ax — Target axes
current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `ytickangle` uses the current axes.

Algorithms

The `ytickangle` function sets and queries the YTickLabelRotation property of the `Axes` object.

See Also

See Also

Functions
`xtickangle` | `ylim` | `ytickformat` | `yticklabels` | `yticks` | `ztickangle`

Properties
Axes Properties

Introduced in R2016b

ytickformat

Specify *y*-axis tick label format

Syntax

```
ytickformat(fmt)
ytickformat(datefmt)
ytickformat(durationfmt)
ytickformat(ax, ___ )

yfmt = ytickformat
yfmt = ytickformat(ax)
```

Description

`ytickformat(fmt)` sets the format for numeric *y*-axis tick labels. For example, specify `fmt` as `'usd'` to display the labels in U.S. dollars.

`ytickformat(datefmt)` sets the format for labels that show dates or times. For example, specify `datefmt` as `'MM-dd-yy'` to display dates such as `04-19-16`. This option applies only to a *y*-axis with datetime values.

`ytickformat(durationfmt)` sets the format for labels that show durations. For example, specify `durationfmt` as `'m'` to display the durations in minutes. This option applies only to a *y*-axis with duration values.

`ytickformat(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument.

`yfmt = ytickformat` returns the format style used for *y*-axis tick labels of the current axes. Depending on the type of labels along the *y*-axis, `yfmt` is a character vector of a numeric format, date format, or duration format.

`yfmt = ytickformat(ax)` returns the format style used for the axes specified by `ax` instead of the current axes.

Examples

Display *y*-Axis Tick Labels in Dollars

Display the *y*-axis tick labels in dollars with and without decimal values.

Create a bar chart. Display the tick labels along the *y*-axis in dollars.

```
x = 0:20:100;
y = [88 67 98 43 45 65];
bar(x,y)
ytickformat('usd')
```

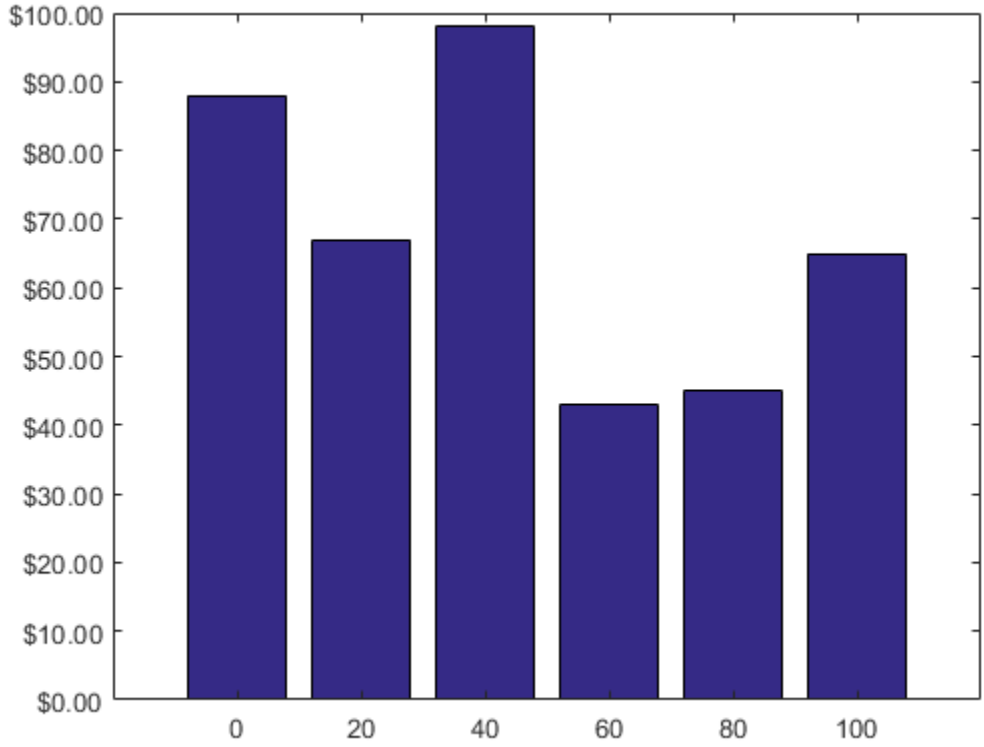

Query the tick label format. MATLAB® returns the format as a character vector containing the formatting operators.

```
fmt = ytickformat
```

```
fmt =

$%,.2f
```

Display the tick labels with no decimal values by tweaking the numeric format to use a precision value of 0 instead of 2.

```
ytickformat('$%,.0f')
```

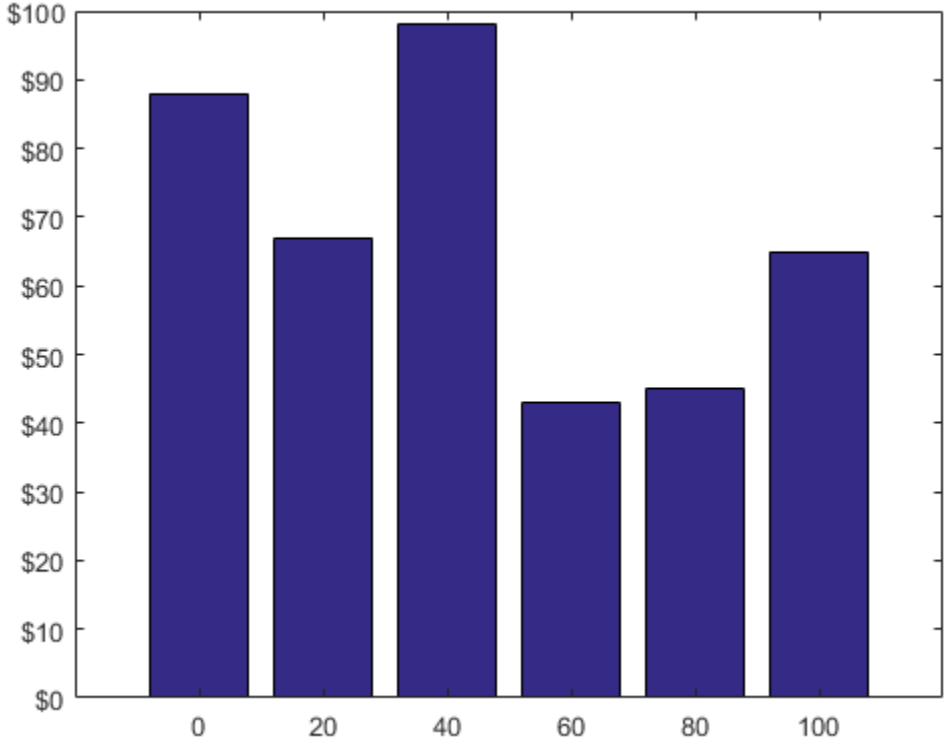

Display Text After Each *y*-Axis Tick Label

Create a line chart. Display the tick labels along the *y*-axis with the text "M" after each value.

```
x = 1:10;
y = [17 25 27 28 33 32 33 34 33 35];
plot(x,y,'-V')
ytickformat('%g M')
```

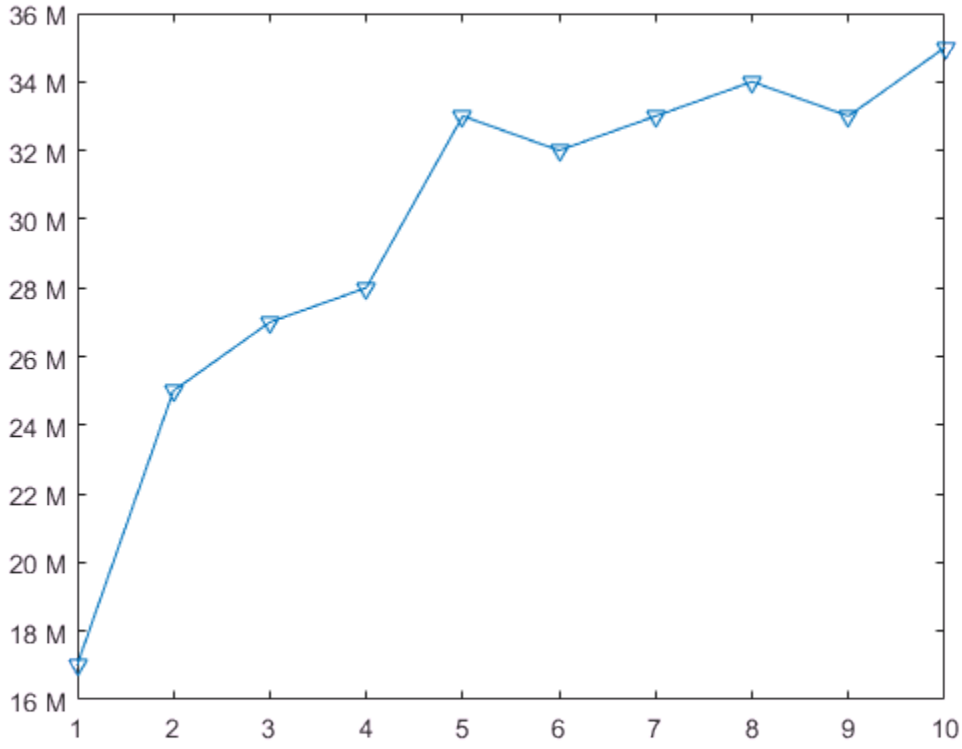

Control Number of Decimals for *y*-Axis Tick Labels

Create a scatter plot of random data. Display the *y*-axis tick labels with two decimal places. Control the decimal places by passing `ytickformat` a character vector of a numeric format that uses fixed-point notation for the conversion character and a precision value of 2.

```
x = rand(30,1);
y = rand(30,1);
scatter(x,y);
ytickformat('%.2f')
```

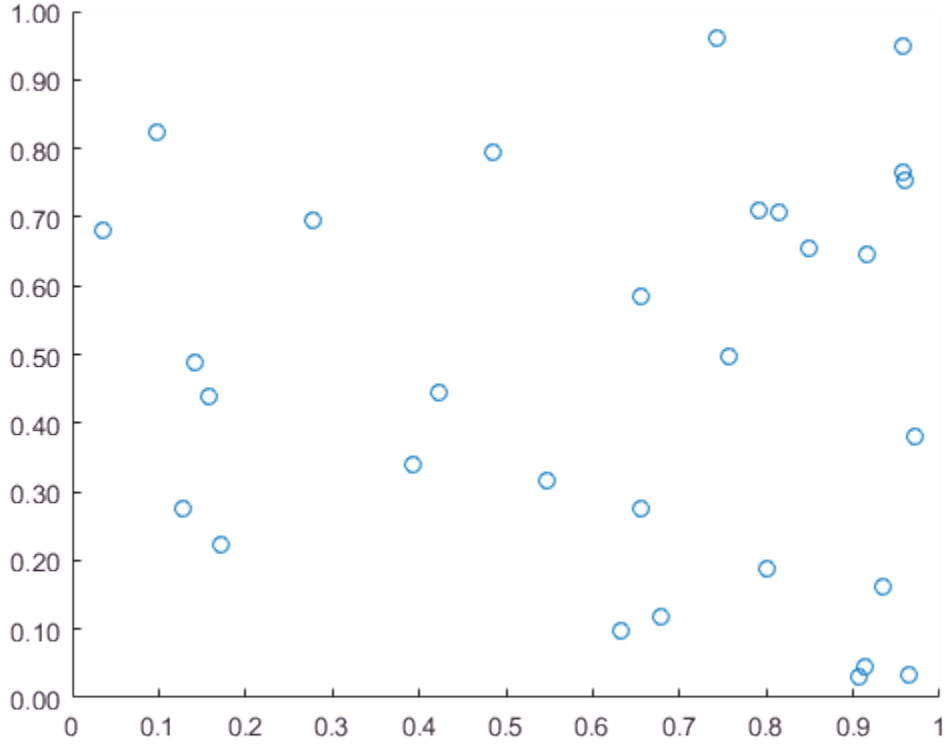

Specify *y*-Axis Tick Label Format for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Specify the tick label format for the *y*-axis of the lower subplot by specifying `ax2` as the first input argument to `ytickformat`. Display the tick labels in US dollars.

```
ax1 = subplot(2,1,1);
plot(rand(6))

ax2 = subplot(2,1,2);
plot(rand(6))
ytickformat(ax2,'usd')
```

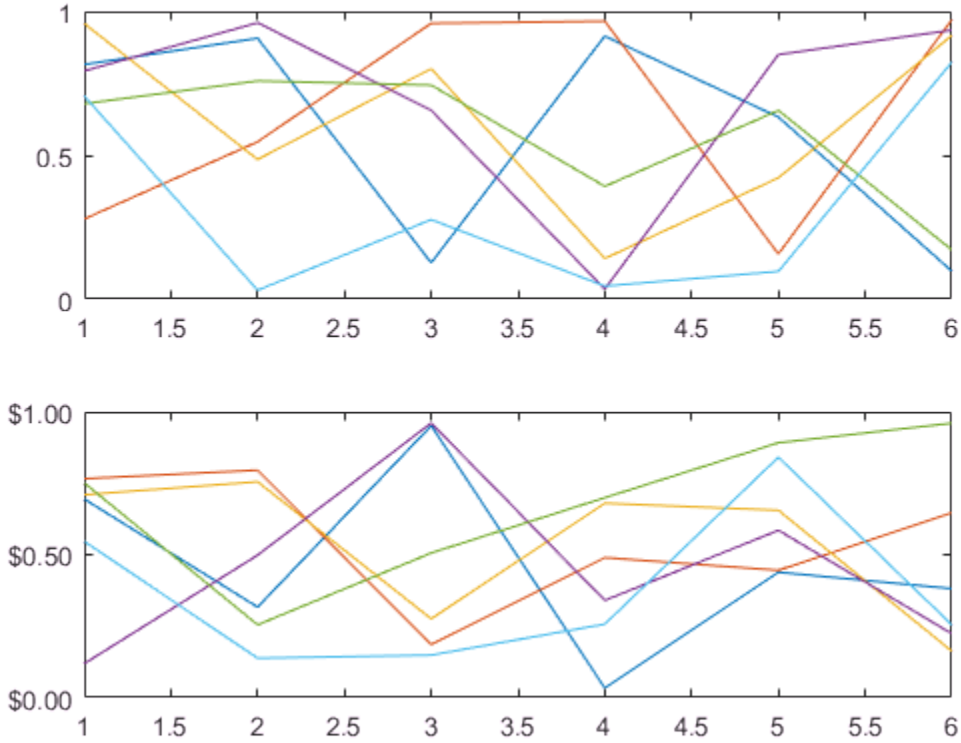

Input Arguments

`fmt` — Format for numeric tick labels

`'%g'` (default) | predefined format | character vector

Format for numeric tick labels, specified as one of the predefined formats listed in this table or a character vector of a custom numeric format.

Predefined Format	Description
`'usd'`	U.S. dollars. This option is equivalent using `'$%,.2f'`. If the labels use scientific

Predefined Format	Description
	notation, this option sets the exponent value to 0.
`'eur'`	Euro. This option is equivalent to using `'\x20AC%,.2f'` with an exponent value of 0.
`'gbp'`	British pound. This option is equivalent to using `'\x00A3%,.2f'` with an exponent value of 0.
`'jpy'`	Japanese yen. This option is equivalent to using `'\x00A5%,d'` with an exponent value of 0.
`'degrees'`	Display degree symbol after values. This option is equivalent to using `'%g\x00B0'` with the default exponent value.
`'percentage'`	Display percent sign after values. This option is equivalent to using `'%g%%'` with the default exponent value.
`'auto'`	Default format of `'%g'` with the default exponent value.

Example: `ytickformat('usd')`

Character Vector of Numeric Format

You can specify a custom numeric format by creating a character vector of identifiers.

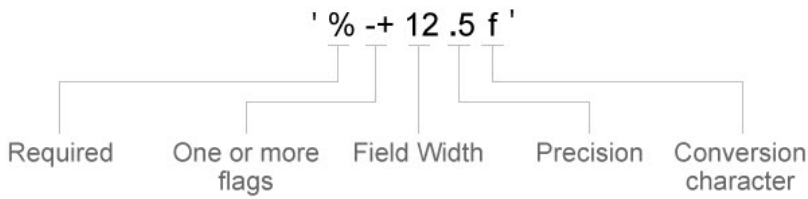

Identifiers are optional, except the percent sign and conversion character. Construct the format in this order:

- One or more flags — Options such as adding a plus sign before positive values. For a full list of options, see the table of Optional Flags.
- Field width — Minimum number of characters to print in the tick label. Specify the field width as an integer value. If the number of significant digits in the tick value is smaller than the field width, then the label is padded with spaces.
- Precision — Number of digits to the right of the decimal point or the number of significant digits, depending on the conversion character. Specify the precision as an integer value.
- Conversion character — Value type. For a full list of options, see the table of Conversion Characters. If you specify a conversion that does not fit the data, then MATLAB overrides the specified conversion, and uses `%e`.

Also, you can specify literal text at the beginning or end of the format. To print a single quotation mark, use `''`. To print a percent character, use `%%`.

Example: `ytickformat('%.2f')` displays the values using fixed-point notation with two decimal places.

Example: `ytickformat('$%.2f')` displays a dollar sign before each value.

Example: `ytickformat('%.2f million')` displays `million` after each value.

Optional Flags

Identifier	Description	Example of Numeric Format
`,`	Display commas every three digits, such as `'1,000'`.	`'%,4.4g'`
`+`	Print the sign character (+) for positive values, such as `'+100'`.	`'%+4.4g'`
`0`	Pad the field width with leading zeros instead of spaces, such as `'0100'`.	`'%04.4g'`
`–`	Left-justify, which pads the end of the value with spaces instead of the beginning. For example, if the field width is `4`, then this flag	`'%-4.4g'`

Identifier	Description	Example of Numeric Format
	formats the label as `'100 '` instead of `' 100'`.	
`#`	For the `%f`, `%e`, and `%g` conversion characters, print the decimal point even when the precision is 0, such as `'100.'`. For `%g`, do not remove trailing zeros.	`'%#4.4g'`

Conversion Characters

Identifier	Description	Example
`d` or `i`	Signed integer with base 10. The precision value indicates the number of significant digits.	`'%.4d'` displays π as `0003`.
`f`	Fixed-point notation. The precision value indicates the number of decimal places.	`'%.4f'` displays π as `3.1416`.
`e`	Exponential notation. The precision value indicates the number of decimal places.	`'%.4e'` displays π as 3.1416×10^0.
`g`	The more compact version of `e` or `f`, with no trailing zeros. The precision value indicates the maximum number of decimal places.	`'%.4g'` displays π as `3.1416`.

`datefmt` — Format for dates and times

character vector | `'auto'`

Format for dates and times, specified as a character vector of a date format or `'auto'` for the default format. The default format is based on the data.

Example: `ytickformat('yyyy-MM-dd')` displays a date and time such as `2016-04-19`.

Example: `ytickformat('eeee, MMMM d, yyyy HH:mm:ss')` displays a date and time such as `Saturday, April 19, 2016 21:41:06`.

Example: `ytickformat('MMMM d, yyyy HH:mm:ss Z')` displays a date and time such as `April 19, 2016 21:41:06 -0400`.

The display format tables show the letter identifiers that you can use to construct the character vector. To separate the fields, you can include nonletter characters such as a hyphen, space, colon, or any non-ASCII characters. The identifiers correspond to the Unicode Locale Data Markup Language (LDML) standard for dates.

Date and Time Formats

Use these identifiers to specify the display formats of the date and time fields.

Letter Identifier	Description	Display
`G`	Era	`CE`
`y`	Year, with no leading zeros. See the Note that follows this table.	`2014`
`yy`	Year, using last two digits. See the Note that follows this table.	`14`
`yyy`, `yyyy` ...	Year, using at least the number of digits specified by the number of instances of `'y'`	For the year 2014, `'yyy'` displays `2014`, while `'yyyyy'` displays `02014`.
`u`, `uu`, ...	ISO year. A single number designating the year. An ISO year value assigns positive values to CE years and negative values to BCE years, with 1 BCE being year 0.	`2014`
`Q`	Quarter, using one digit	`2`
`QQ`	Quarter, using two digits	`02`
`QQQ`	Quarter, abbreviated	`Q2`
`QQQQ`	Quarter, full name	`2nd quarter`
`M`	Month, numerical using one or two digits	`4`
`MM`	Month, numerical using two digits	`04`

Letter Identifier	Description	Display
MMM	Month, abbreviated name	Apr
MMMM	Month, full name	April
MMMMM	Month, capitalized first letter	A
W	Week of the month	1
d	Day of the month, using one or two digits	5
dd	Day of the month using two digits	05
D	Day of the year, using one, two or three digits	95
DD	Day of the year using two digits	95
DDD	Day of the year using three digits	095
e	Day of the week, numerical using one or two digits.	7, where Sunday is the first day of the week.
ee	Day of the week, numerical using two digits	07
eee	Day, abbreviated name	Sat
eeee	Day, full name	Saturday
eeeee	Day, capitalized first letter	S
a	Day period (AM or PM)	PM
h	Hour, 12-hour clock notation using one or two digits	9
hh	Hour, 12-hour clock notation using two digits	09
H	Hour, 24-hour clock notation using one or two digits	21
HH	Hour, 24-hour clock notation using two digits	21
m	Minute, using one or two digits	41
mm	Minute, using two digits	41
s	Second, using one or two digits	6

Letter Identifier	Description	Display
ss	Second, using two digits	06
S, SS, ..., SSSSSSSSS	Fractional second, using the number of digits specified by the number of instances of 'S' (up to 9 digits).	'SSS' truncates 6.12345 seconds to 123.

Some tips and considerations:

- If you read a two-digit year number and specify the format as y or yy, then the pivot year determines the century to which the year belongs.
- Use one or more u characters instead of y characters to represent the year when working with year numbers near zero.
- Datetime values later than 144683 years CE or before 140743 BCE display only the year numbers, regardless of the specified format value.

Time Zone Offset Formats

Use these identifiers to specify the display format of the time zone offset. A time zone offset is the amount of time that a specific date and time is offset from UTC. A time zone offset is different from a time zone in that it comprises rules that determine the offsets for specific times of the year. Include a time zone offset identifier when you want to ensure that the time components are displayed unambiguously.

Letter Identifier	Description	Display
z	Abbreviated name of the time zone offset. If this value is not available, then the time zone offset uses the short UTC format, such as UTC-4.	EDT
Z	ISO 8601 basic format with hours, minutes, and optional seconds fields.	-0400
ZZZZ	Long UTC format.	UTC-04:00
ZZZZZ	ISO 8601 extended format with hours, minutes, and optional	-04:00

Letter Identifier	Description	Display
	seconds fields. A time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	
`x` or `X`	ISO 8601 basic format with hours field and optional minutes field. If you specify `X`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04`
`xx` or `XX`	ISO 8601 basic format with hours and minutes fields. If you specify `XX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-0400`
`xxx` or `XXX`	ISO 8601 extended format with hours and minutes fields. If you specify `XXX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04:00`
`xxxx` or `XXXX`	ISO 8601 basic format with hours, minutes, and optional seconds fields. If you specify `XXXX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-0400`
`xxxxx` or `XXXXX`	ISO 8601 extended format with hours, minutes, and optional seconds fields. If you specify `XXXXX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04:00`

`durationfmt` — Format for duration values

character vector

Format for duration values, specified as a character vector of a duration format.

To display a duration as a single number that includes a fractional part (for example, 1.234 hours), specify one of the following formats.

Format	Description
`'y'`	Number of exact, fixed-length years. A fixed-length year is equal to 365.2425 days.
`'d'`	Number of exact, fixed-length days. A fixed-length day is equal to 24 hours.
`'h'`	Number of hours
`'m'`	Number of minutes
`'s'`	Number of seconds

To display a duration in the form of a digital timer, specify one of these formats:

- `'dd:hh:mm:ss'`
- `'hh:mm:ss'`
- `'mm:ss'`
- `'hh:mm'`

In addition, you can display up to nine fractional second digits by appending up to nine `S` characters. For example, `'hh:mm:ss.SSS'` displays the milliseconds of a duration value to three digits.

`ax` — Target axes

current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `ytickformat` uses the current axes.

Algorithms

The `ytickformat` function sets and queries the `TickLabelFormat` property of the ruler object associated with the *y*-axis.

See Also

See Also

Functions

`xtickformat` | `ylim` | `ytickangle` | `yticklabels` | `yticks` | `ztickformat`

Properties

DatetimeRuler Properties | DurationRuler Properties | NumericRuler Properties

Introduced in R2016b

yticklabels

Set or query *y*-axis tick labels

Syntax

```
yticklabels(labels)
yl = yticklabels

yticklabels('auto')
yticklabels('manual')
m = yticklabels('mode')

___ = yticklabels(ax, ___ )
```

Description

`yticklabels(labels)` sets the *y*-axis tick labels for the current axes. Specify `labels` as a cell array of character vectors; for example, `{'January','February','March'}`. If you specify the labels, then the *y*-axis tick values and tick labels no longer update automatically based on changes to the axes.

`yl = yticklabels` returns the *y*-axis tick labels for the current axes.

`yticklabels('auto')` sets an automatic mode, enabling the axes to determine the *y*-axis tick labels. Use this option if you set the labels and then want to set them back to the default values.

`yticklabels('manual')` sets a manual mode, freezing the *y*-axis tick labels at the current values.

`m = yticklabels('mode')` returns the current value of the *y*-axis tick labels mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify the tick labels or set the mode to manual.

`___ = yticklabels(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes.

Examples

Specify y-Axis Tick Values and Labels

Create a line plot. Display tick marks along the *y*-axis at the values 0, 50, and 100. Then, specify a label for each tick mark.

```
x = linspace(0,10);
y = x.^2;
plot(x,y)
yticks([0 50 100])
yticklabels({'y = 0','y = 50','y = 100'})
```

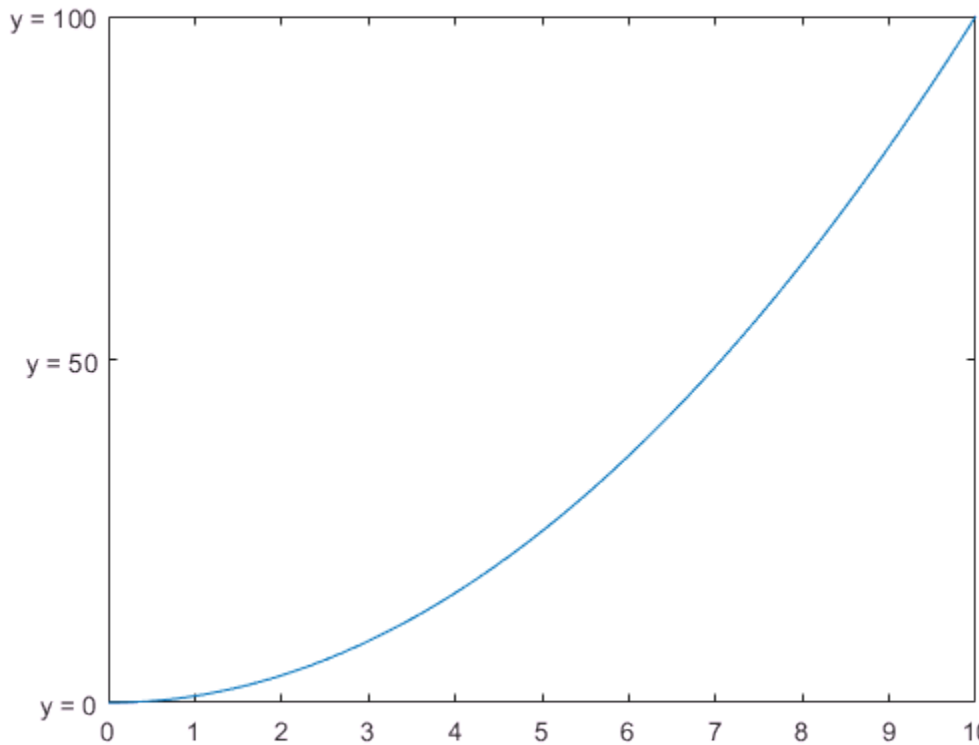

Specify y-Axis Tick Labels for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Plot random data in each subplot. Set the *y*-axis tick values and labels for the lower subplot by specifying `ax2` as the first input argument.

```
ax1 = subplot(2,1,1);
plot(rand(3))

ax2 = subplot(2,1,2);
plot(rand(3))
yticks(ax2,[0 .25 .5 .75 1])
yticklabels(ax2,{'y = 0','1/4','1/2','3/4','y = 1'})
```

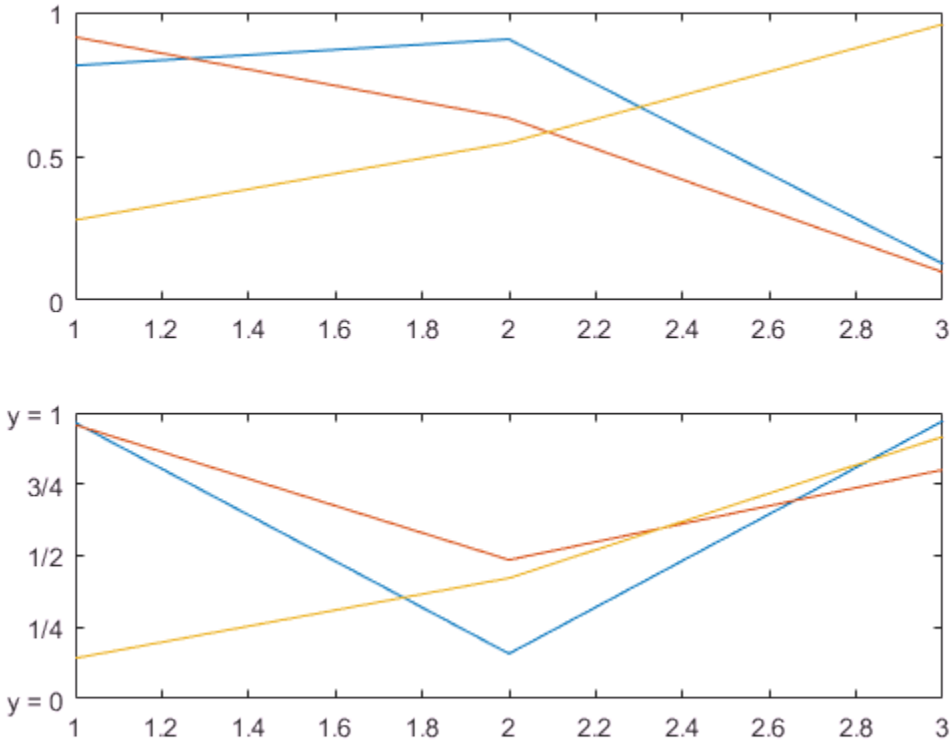

Set y-Axis Tick Labels Back to Default Labels

Create a stem chart and specify the *y*-axis tick values and corresponding labels. Then, set the *y*-axis tick values and labels back to the default values.

```
stem(1:10)
yticks([1 4 6 10])
yticklabels({'A','B','C','D'})
```

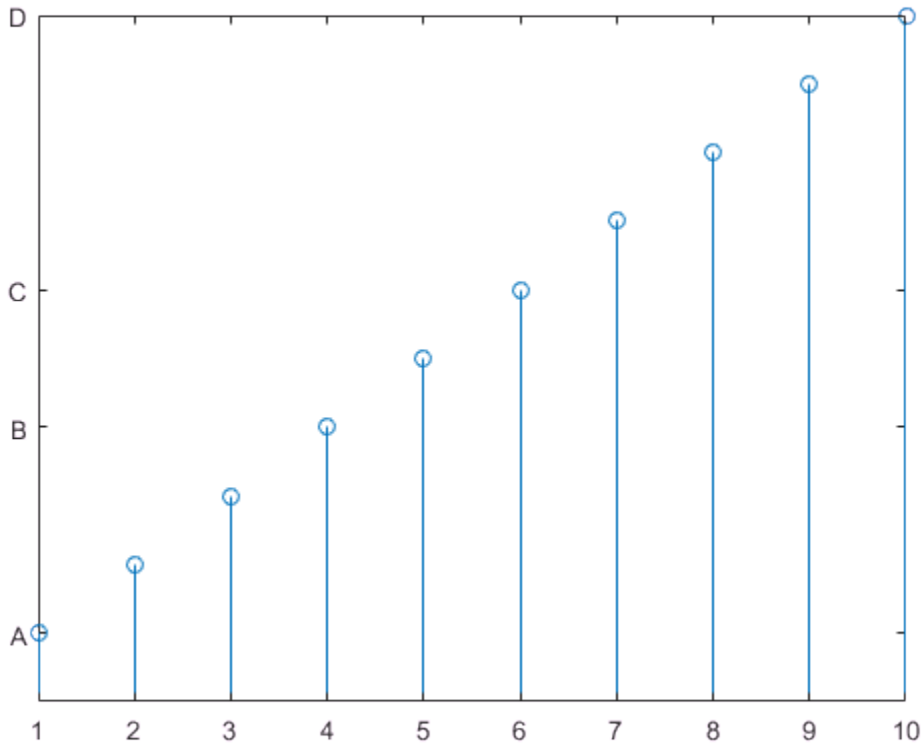


```
yticks('auto')
yticklabels('auto')
```

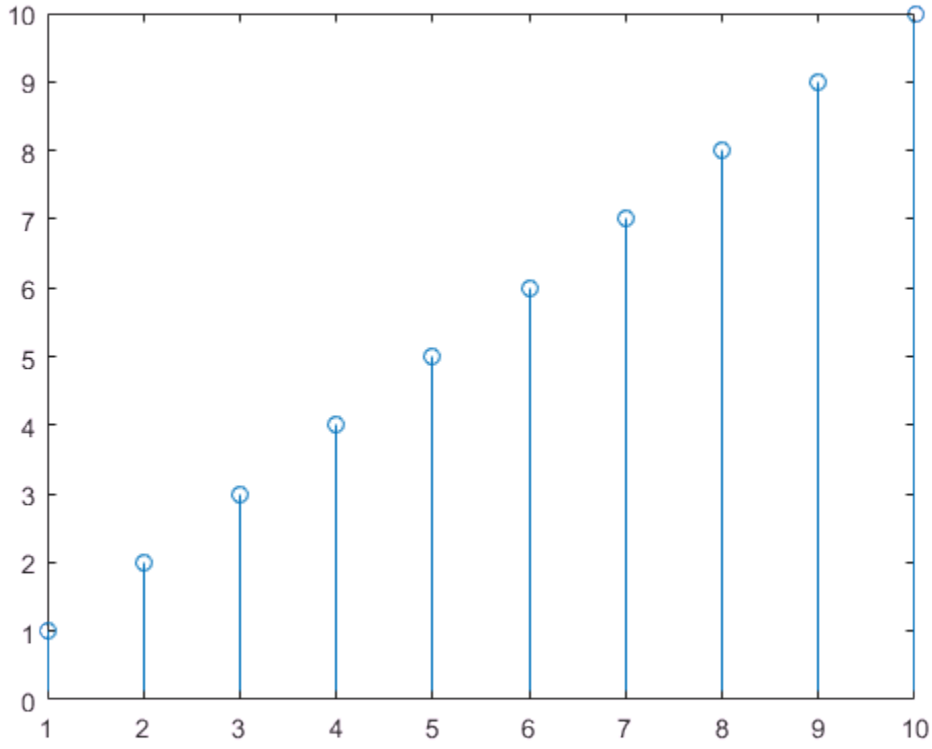

Remove *y*-Axis Tick Labels

Remove the tick labels along the *y*-axis by specifying the tick labels as an empty array.

```
plot(rand(5))
yticklabels({})
```

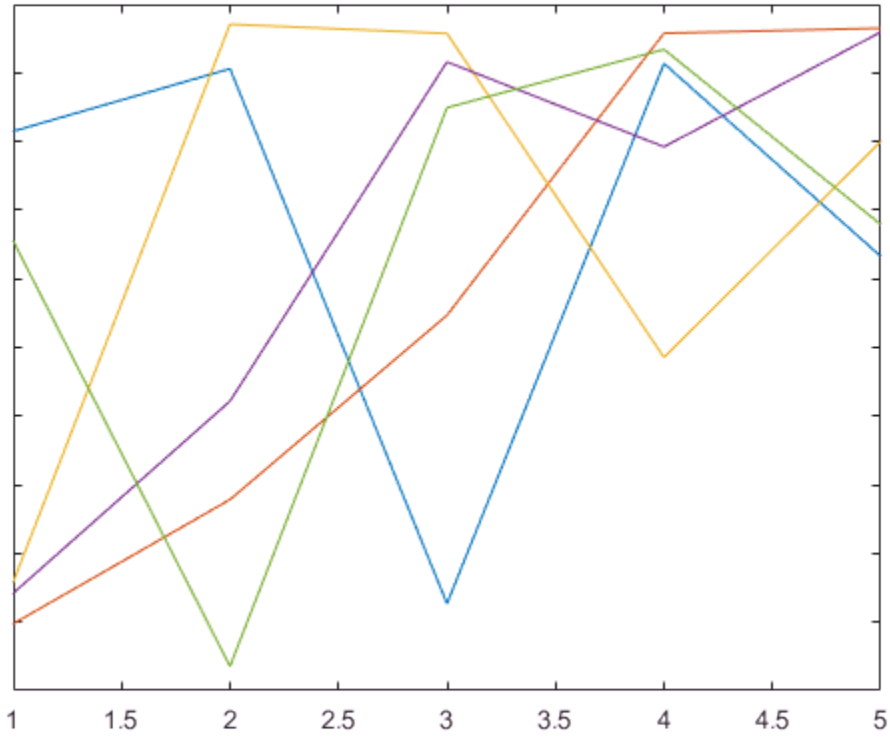

- "Specify Axis Tick Values and Labels"

Input Arguments

`labels` — Tick labels

cell array of character vectors

Tick labels, specified as a cell array of character vectors. If you do not want tick labels to show, then specify an empty cell array `{}`. Tick labels support TeX and LaTeX markup. See the TickLabelInterpreter property of the `Axes` object for more information.

Example: `yticklabels({'0','\pi','2\pi'})`

Example: `yticklabels({'January','Febrary','March'})`

Example: `yticklabels({})`

Note: To specify the tick values, use the `yticks` function.

`ax` — Target axes

current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `yticklabels` uses the current axes.

Output Arguments

`yl` — Current tick labels

cell array of character vectors | character matrix

Current tick labels, returned as a cell array of character vectors or a character matrix.

`m` — Current tick labels mode

`'auto'` | `'manual'`

Current tick labels mode, returned as one of these values:

- `'auto'` — Automatically determine the *y*-axis tick labels.
- `'manual'` — Use manually specified *y*-axis tick labels.

Definitions

Tick Labels

The tick labels are the labels that you see next to each tick mark. The tick values are the locations along the *y*-axis where the tick marks appear. Set the tick values using the `yticks` function. Set the corresponding tick labels using the `yticklabels` function.

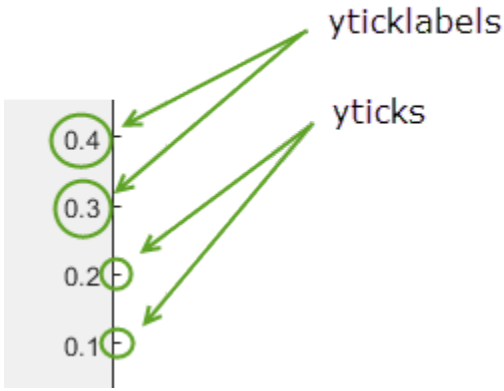

Algorithms

The `yticklabels` function sets and queries several axes properties related to the *y*-axis tick labels.

- YTickLabel — Property that stores the text for the *y*-axis tick labels.
- YTickLabelMode — Property that stores the *y*-axis tick label mode. When you set the *y*-axis tick labels using `yticklabels`, this property changes to `'manual'`.
- YTickMode — Property that stores the *y*-axis tick value mode. When you set the *y*-axis tick labels using `yticklabels`, this property changes to `'manual'`.

See Also

See Also

Functions

`xticklabels` | `ylim` | `ytickangle` | `ytickformat` | `yticks` | `zticklabels`

Properties

Axes Properties

Topics

"Specify Axis Tick Values and Labels"

Introduced in R2016b

yticks

Set or query *y*-axis tick values

Syntax

```
yticks(ticks)
yt = yticks

yticks('auto')
yticks('manual')
m = yticks('mode')

___ = yticks(ax, ___ )
```

Description

`yticks(ticks)` sets the *y*-axis tick values, which are the locations along the *y*-axis where the tick marks appear. Specify `ticks` as a vector of increasing values; for example, `[0 2 4 6]`. This command affects the current axes.

`yt = yticks` returns the current *y*-axis tick values as a vector.

`yticks('auto')` sets an automatic mode, enabling the axes to determine the *y*-axis tick values. Use this option if you change the tick values and then want to set them back to the default values.

`yticks('manual')` sets a manual mode, freezing the *y*-axis tick values at the current values. Use this option if you want to retain the current tick values when resizing the axes or adding new data to the axes.

`m = yticks('mode')` returns the current *y*-axis tick values mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify tick values or change the mode to manual.

`___ = yticks(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes.

Examples

Specify y-Axis Tick Values and Labels

Create a line plot. Display tick marks along the *y*-axis at the values 0, 50, and 100. Then, specify a label for each tick mark.

```
x = linspace(0,10);
y = x.^2;
plot(x,y)
yticks([0 50 100])
yticklabels({'y = 0','y = 50','y = 100'})
```

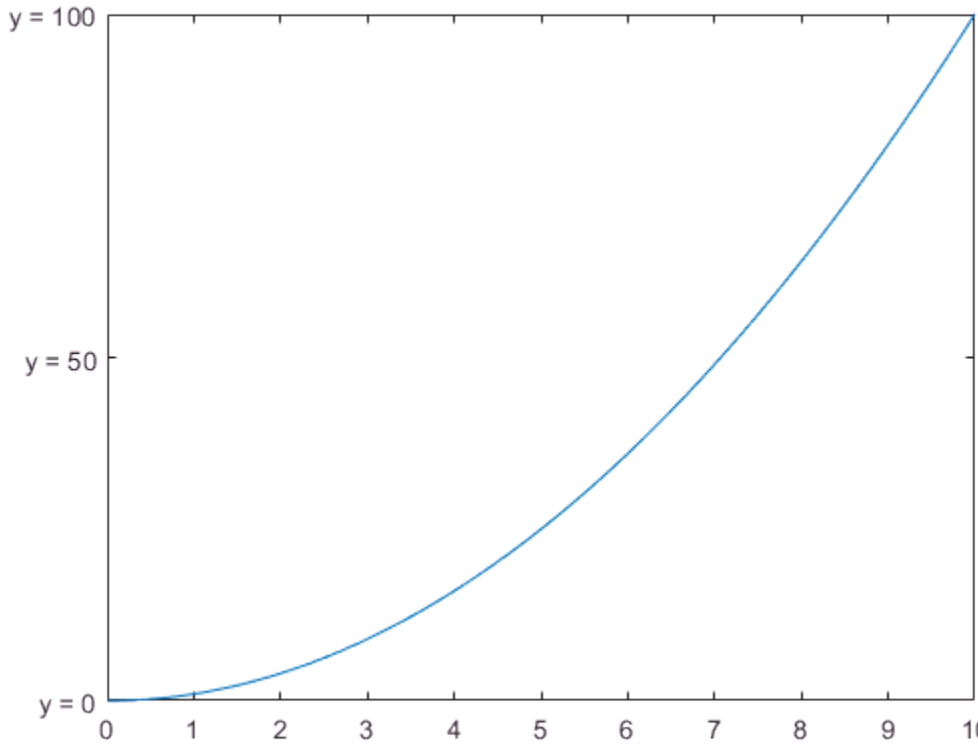

Specify Nonuniform y-Axis Tick Values

Display tick marks along the *y*-axis at nonuniform values between 0 and 25. MATLAB® labels the tick marks with the numeric values.

```
x = linspace(-5,5);
y = x.^2;
plot(x,y)
yticks([0 2 4 6 8 10 15 25])
```

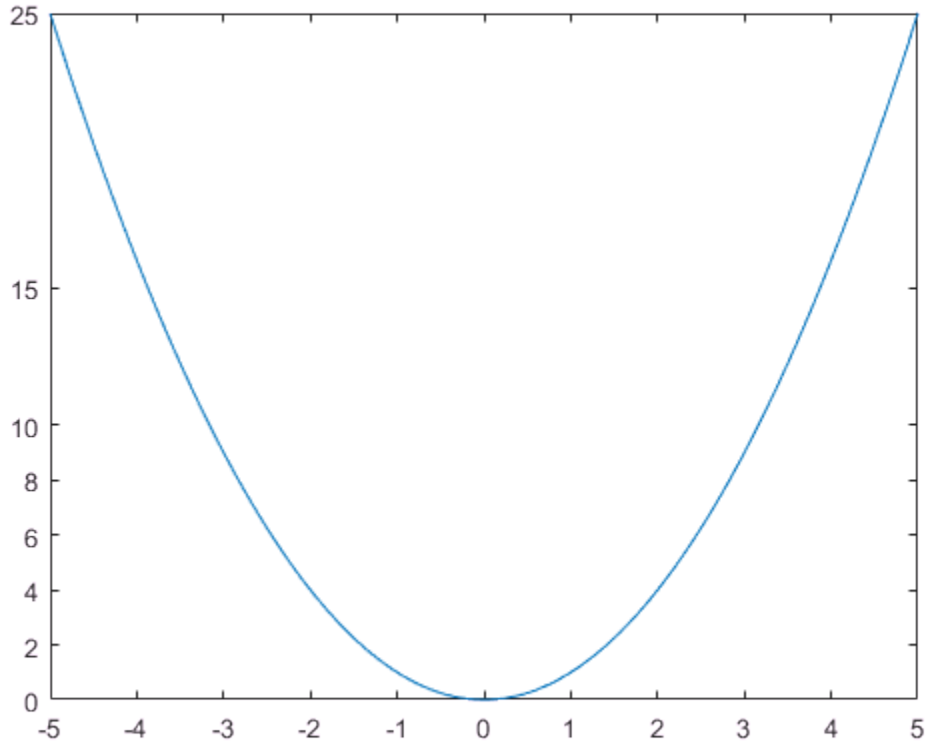

Increment y-Axis Tick Values by 25

Display tick marks along the *y*-axis at increments of 25, starting from 0 and ending at 100.

```
x = linspace(0,10);
y = x.^2;
plot(x,y)
yticks(0:25:100)
```

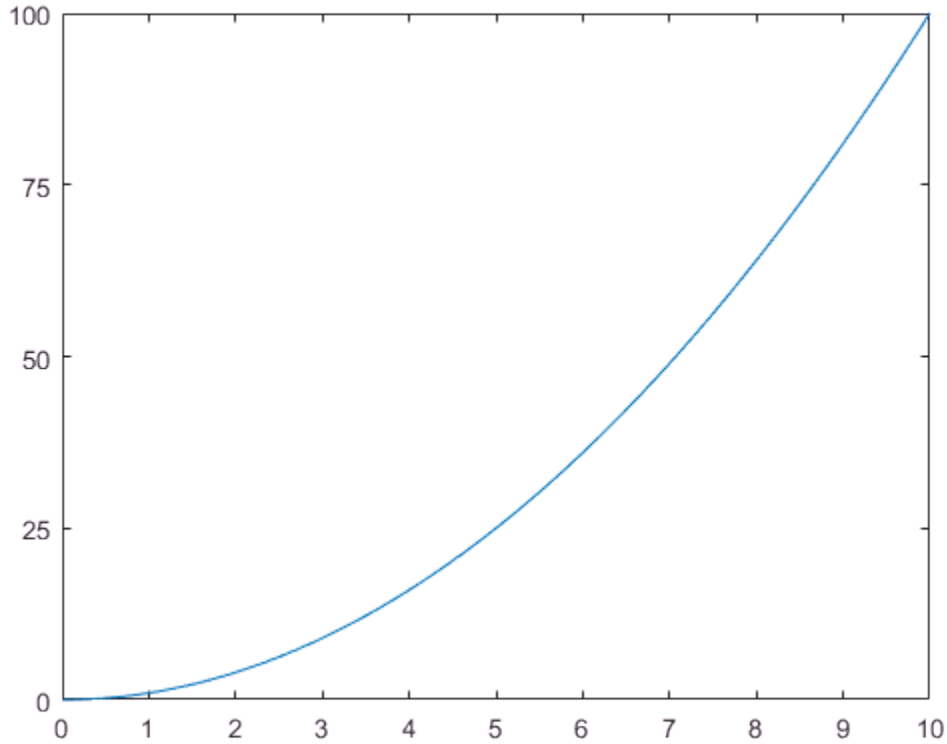

Set y-Axis Tick Values Back to Default Values

Create a stem chart and specify the *y*-axis tick values. Then, set the *y*-axis tick values back to the default values.

```
stem(1:10)
yticks([0 5 10])
```

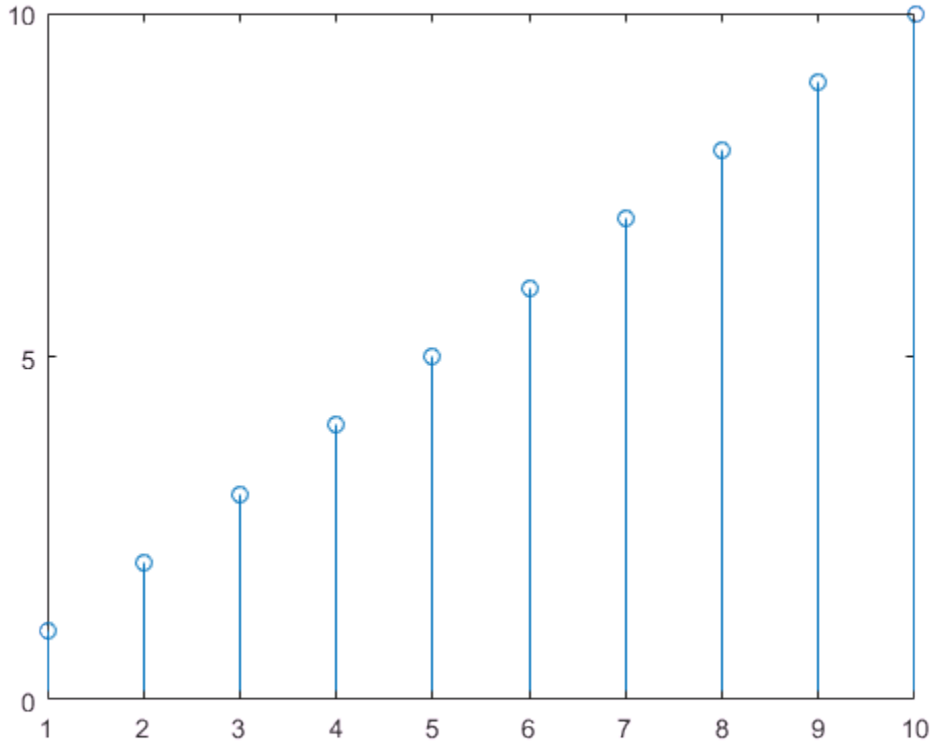


```
yticks('auto')
```

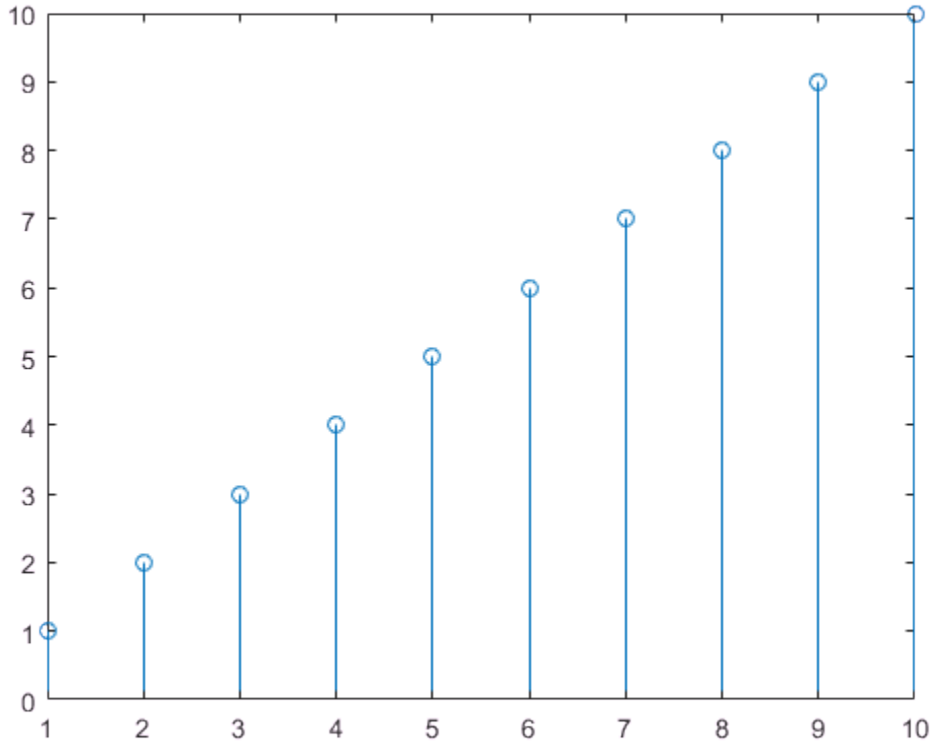

Specify y-Axis Tick Values for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Plot random data in each subplot. Set the *y*-axis ticks for the lower subplot by passing `ax2` as the first input argument to the `yticks` function.

```
ax1 = subplot(2,1,1);
plot(rand(3))

ax2 = subplot(2,1,2);
plot(rand(3))
yticks(ax2,0:.2:1)
```

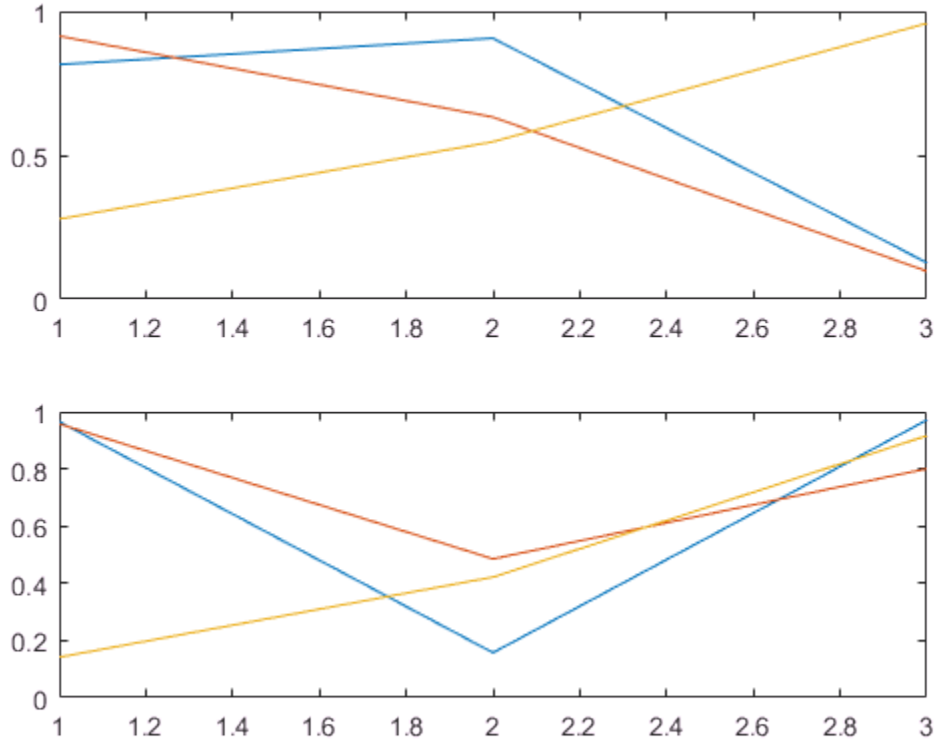

Remove y-Axis Tick Marks

Remove the tick marks along the *y*-axis by specifying the tick values as an empty array.

```
x = linspace(0,10);
y = sin(x);
plot(x,y)
yticks([])
```

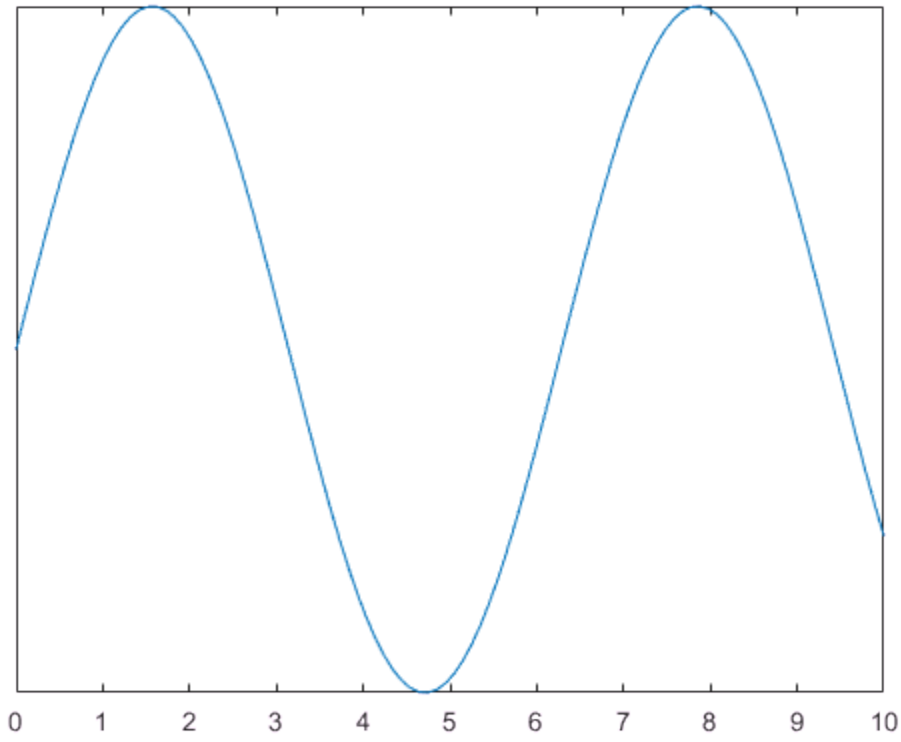

- "Specify Axis Tick Values and Labels"

Input Arguments

`ticks` — Tick values
vector of increasing values

Tick values, specified as a vector of increasing values. If you do not want tick marks along the *y*-axis, specify an empty vector `[]`.

You can specify the tick values as numeric, categorical, datetime, or duration values. However, the type of values that you specify must match the type of values along the *y*-axis.

Example: `yticks([pi 2*pi 3*pi 4*pi])`

Example: `yticks(0:10:100)`

Example: `yticks([])`

Note: To specify the tick labels, use the `yticklabels` function.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ax` — Target axes

current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `yticks` uses the current axes.

Output Arguments

`yt` — Current tick values

vector

Current tick values, returned as a vector.

`m` — Current mode

`'auto'` | `'manual'`

Current mode, returned as one of these values:

- `'auto'` — Automatically determine the *y*-axis tick values.
- `'manual'` — Use manually specified *y*-axis tick values.

Definitions

Tick Values

The tick values are the locations along the *y*-axis where the tick marks appear. The tick labels are the labels that you see next to each tick mark. Set the tick values using the `yticks` function. Set the corresponding tick labels using the `yticklabels` function.

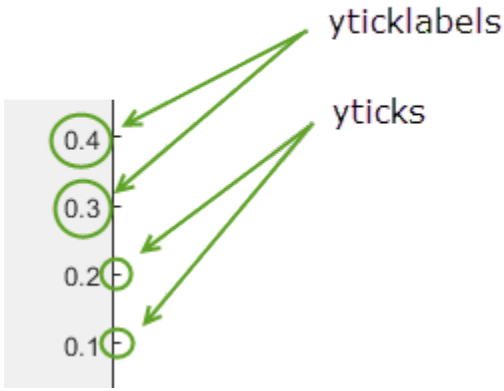

Algorithms

The `yticks` function sets and queries several axes properties related to the *y*-axis tick values.

- YTick — Property that stores the *y*-axis tick values.
- YTickMode — Property that stores the *y*-axis tick value mode. When you set the *y*-axis tick values, this property changes to `'manual'`.

See Also

See Also

Functions

`xticks` | `ylim` | `ytickangle` | `ytickformat` | `yticklabels` | `zticks`

Properties

Axes Properties

Topics

"Specify Axis Tick Values and Labels"

Introduced in R2016b

yyaxis

Create chart with two y-axes

Syntax

```
yyaxis left
yyaxis right
```

```
yyaxis(ax, ___ )
```

Description

`yyaxis left` activates the side of the current axes associated with the left *y*-axis. Subsequent graphics commands target the left side. If the current axes do not include two *y*-axes, then this command adds a second *y*-axis. If there are no axes, then this command first creates them.

`yyaxis right` activates the side of the current axes associated with the right *y*-axis. Subsequent graphics commands target the right side. If the current axes do not include two *y*-axes, then this command adds a second *y*-axis. If there are no axes, then this command first creates them.

`yyaxis(ax, ___ )` specifies the active side for the axes `ax` instead of the current axes. If the axes do not include two *y*-axes, then this command adds a second *y*-axis. Specify the axes as the first input argument. Use single quotes around `'left'` and `'right'`.

Examples

Plot Data Using Two y-Axes

Create axes with a *y*-axis on both the left and right sides. Plot a set of data against the left *y*-axis. Then, use `yyaxis right` to activate the right side so that subsequent graphics functions target it. Plot a second set of data against the right *y*-axis and set the limits for the right *y*-axis.

```
x = linspace(0,10);
```

```
y = sin(3*x);
yyaxis left
plot(x,y)

z = sin(3*x).*exp(0.5*x);
yyaxis right
plot(x,z)
ylim([-150 150])
```

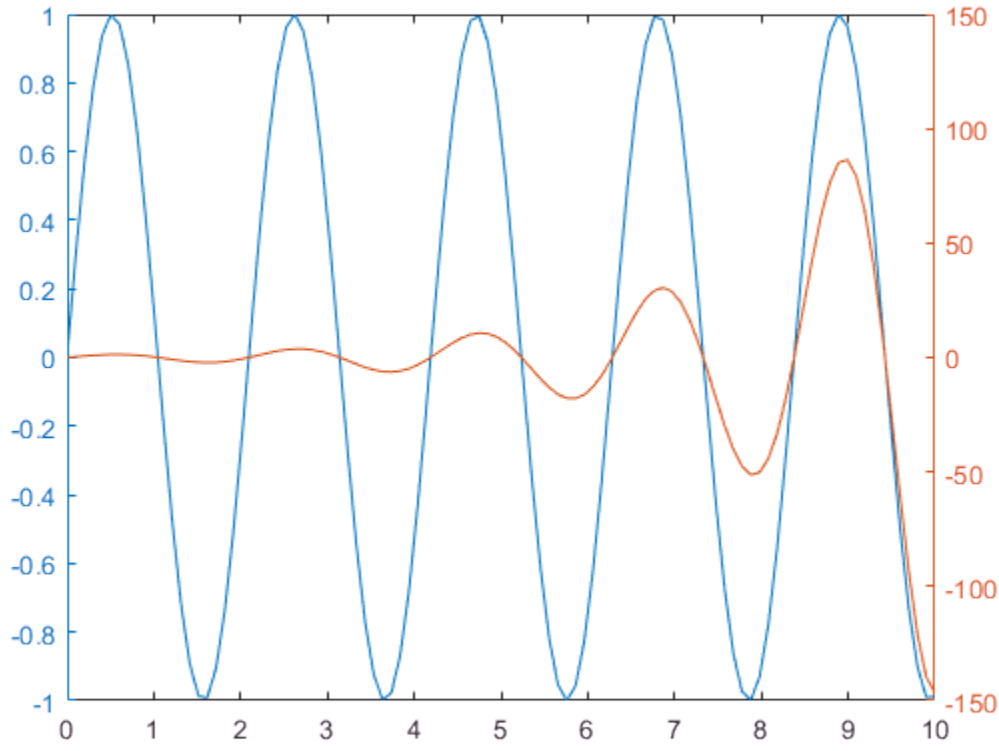

Add Title and Axis Labels to Each Side

Create a chart with two *y*-axes and add a title and axis labels to each side.

Load the matrix `hwydata` from the example file `accidents.mat`. Create a scatter plot of the fifth column in `hwydata` against the left *y*-axis. Add a title and axis labels.

```
load('accidents.mat','hwydata')
ind = 1:51;
drivers = hwydata(:,5);
yyaxis left
scatter(ind,drivers)
title('Highway Data')
xlabel('States')
ylabel('Licensed Drivers (thousands)')
```

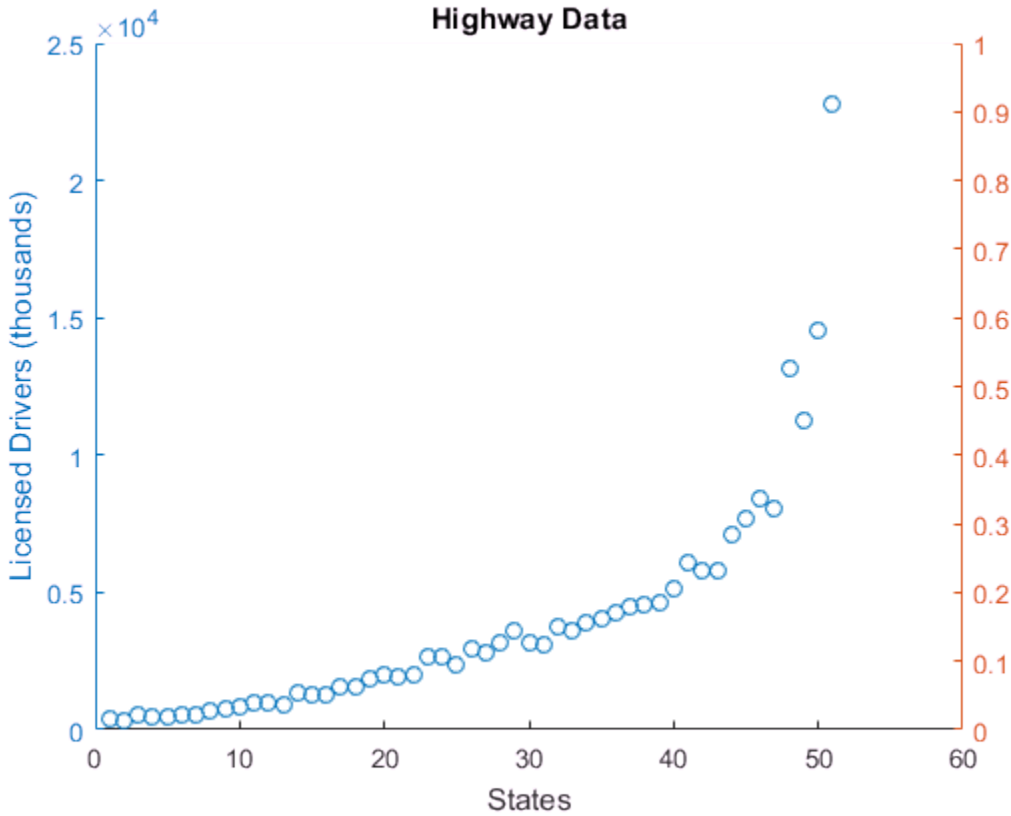

Create a second scatter plot of the seventh column in `hwydata` against the right *y*-axis. Then, label the right *y*-axis.

```
pop = hwydata(:,7);
yyaxis right
scatter(ind,pop)
ylabel('Vehicle Miles Traveled (millions)')
```

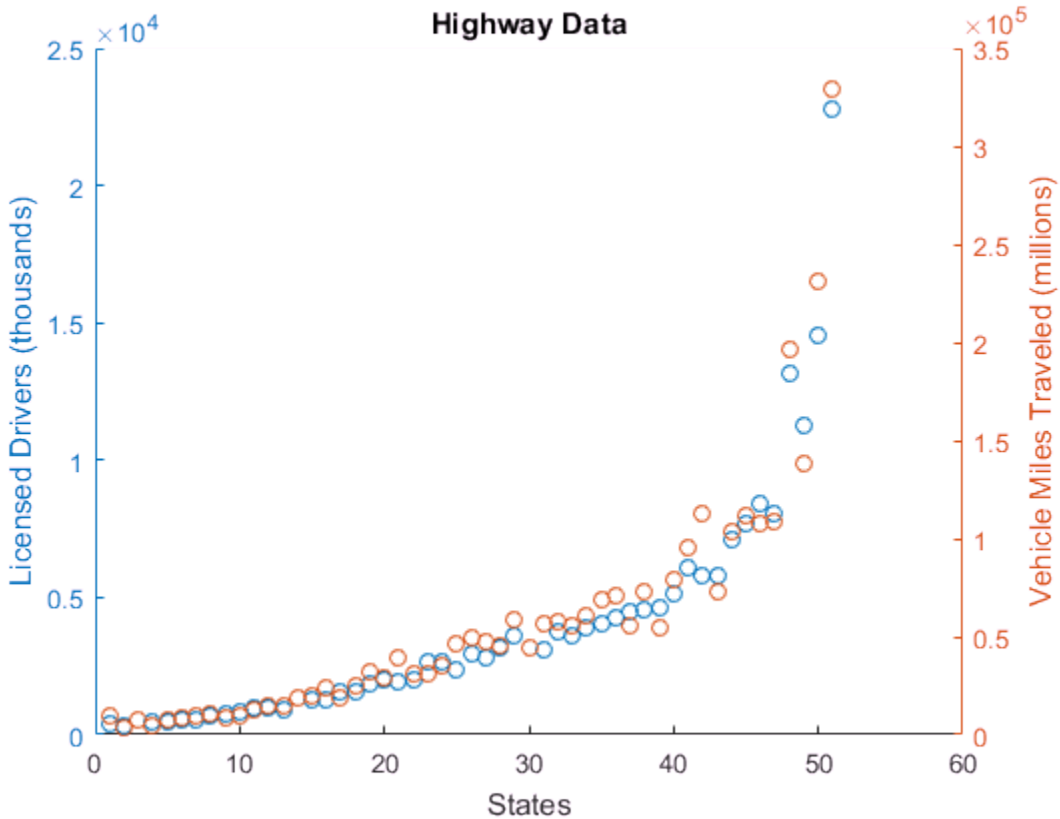

Plot Multiple Sets of Data on Each Side

Plot two lines against the left *y*-axis by using the `hold on` command.

```
x = linspace(0,10);
yl1 = sin(x);
yl2 = sin(x/2);
```

```
yyaxis left
plot(x,yl1)
hold on
plot(x,yl2)
```

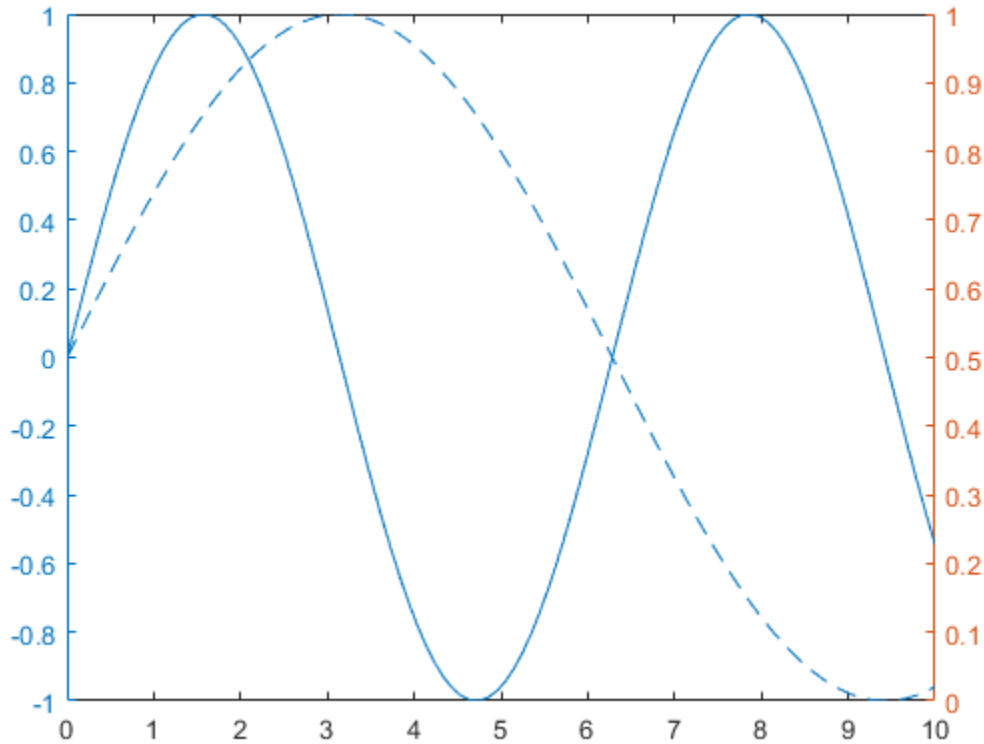

Plot two lines against the right *y*-axis. The `hold` command affects both the left and right *y*-axes, so you do not need to reissue it. After plotting, turn `hold` back off.

```
yr1 = x;
yr2 = x.^2;
yyaxis right
plot(x,yr1)
plot(x,yr2)
hold off
```

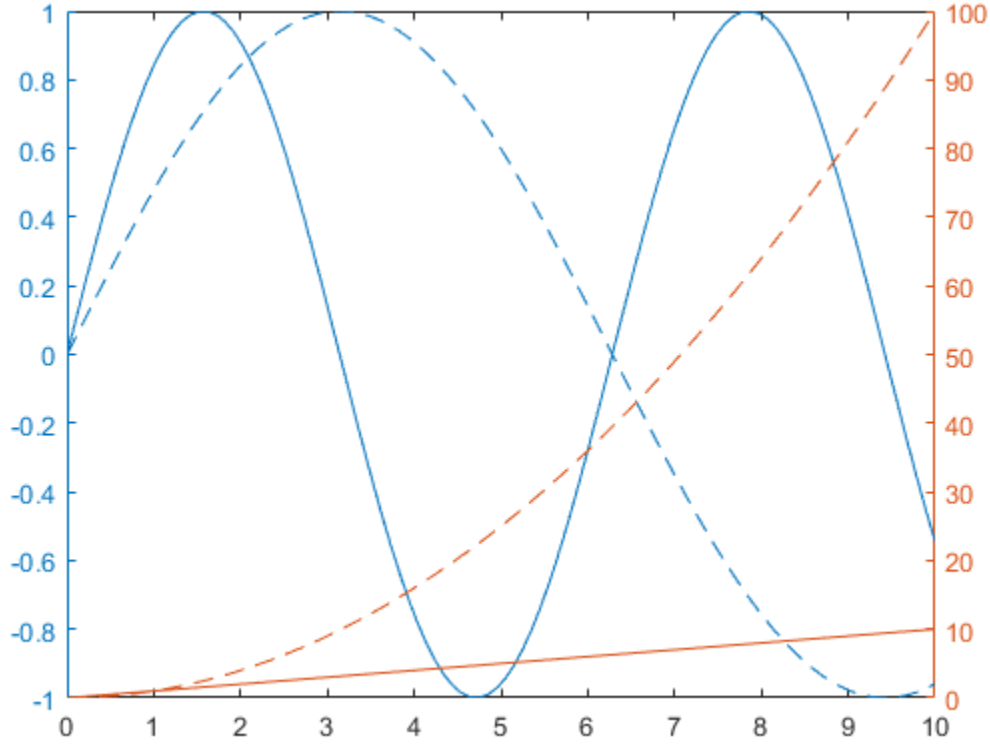

Clear the left side by making it active and then using the `cla` command.

```
yyaxis left
cla
```

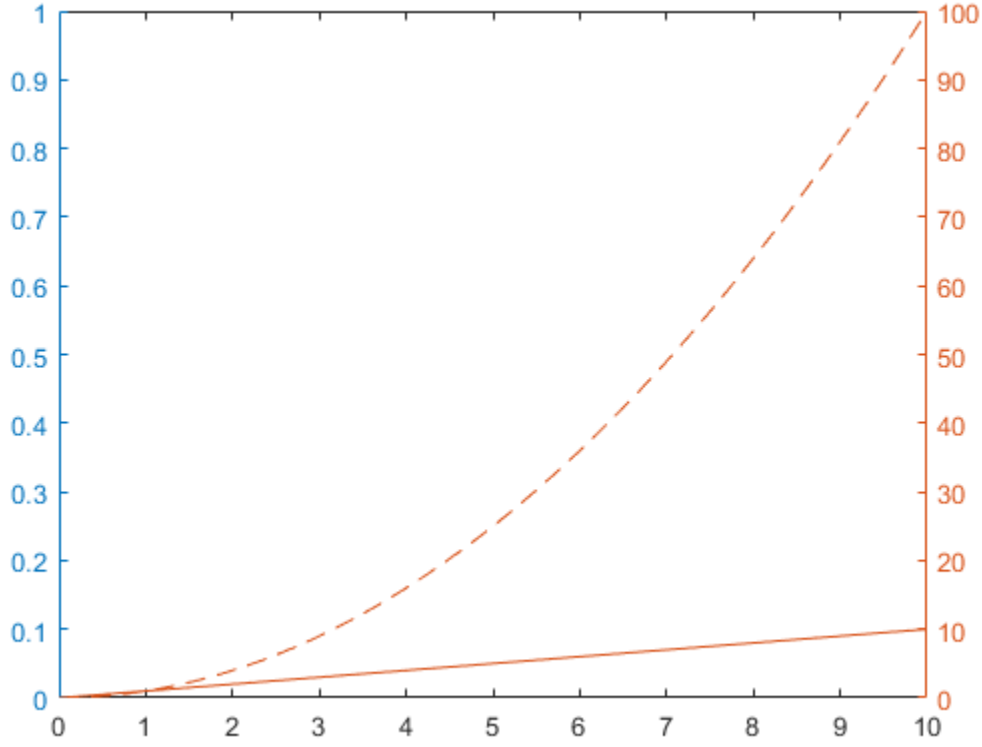

Add Second *y*-Axis to Specific Axes

Create a figure with two subplots and assign the Axes objects to variables `ax1` and `ax2`. Add a second *y*-axis to the upper subplot by specifying `ax2` as the first input to `yyaxis`. If you do not specify the axes, then `yyaxis` adds a second *y*-axis to the current axes.

```
x = linspace(1,10);
ax1 = subplot(2,1,1);
yyaxis(ax1,'left')
plot(ax1,x,sin(x))
yyaxis(ax1,'right')
plot(ax1,x,exp(x))

ax2 = subplot(2,1,2);
```

```
plot(ax2,1:10)
```

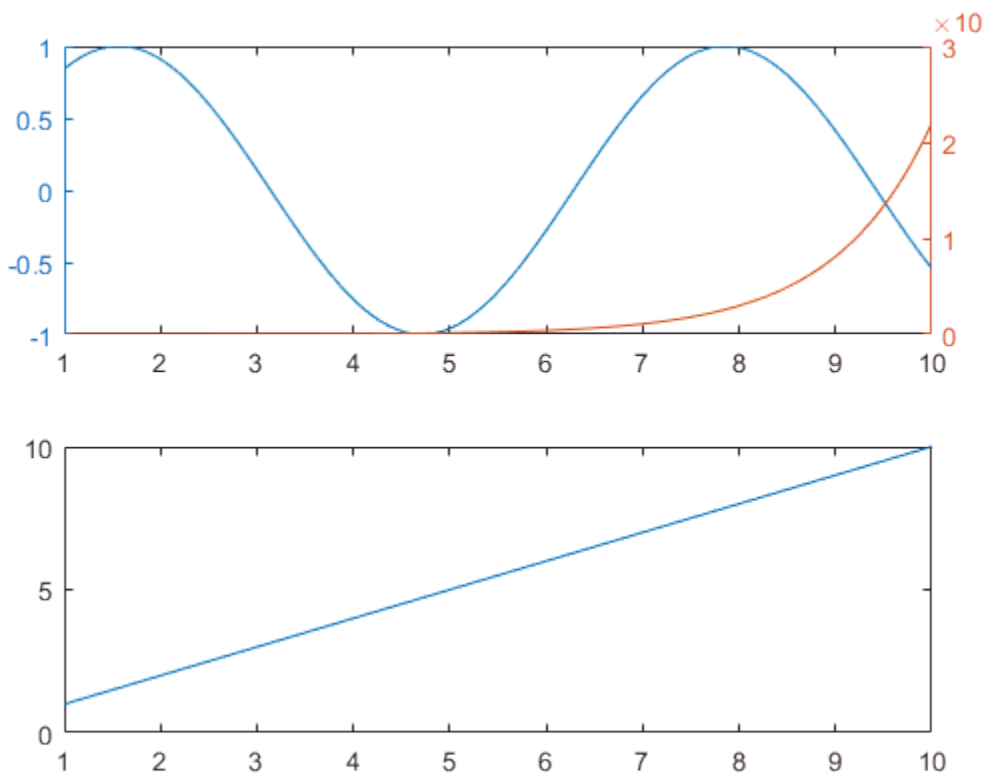

- "Create Chart with Two y-Axes"
- "Modify Properties of Charts with Two y-Axes"

Input Arguments

ax — Target axes

current axes (default) | `Axes` object

Target axes, specified as an `Axes` object. If you do not specify an `Axes` object, then `yyaxis` uses the current axes.

Limitations

- When working with two y-axes, you cannot:
  - Rotate the axes (2-D view only).
  - Pin annotations.
  - Copy the axes object using `copyobj`.

Tips

- Grid lines correspond with the tick mark locations along the left *y*-axis.
- To determine which side of the axes is active, query the YAxisLocation property for the `Axes` object. The property is set to `'left'` when the left side is active and `'right'` when the right side is active. The `YAxisLocation` property for an `Axes` object with two *y*-axes is read only.
- To clear the active side, use `cla`. To clear both sides of the axes and remove the right *y*-axis, use `cla reset`. Alternatively, you can wait to clear both sides and remove the right *y*-axis until the next plotting command by setting the `NextPlot` property of the `Axes` object to `'replaceall'`.

Algorithms

Colors and Line Styles

Plots associated with a particular side of the axes use the same color as the *y*-axis on that side. If a side contains multiple lines, then the lines cycle through the line style order. The left *y*-axis uses the first color in the color order of the `Axes` object, and the right *y*-axis uses the second color.

If you add a second *y*-axis to an `Axes` object that contains charts, then the existing charts and the left *y*-axis do not change colors. The right *y*-axis uses the next color in the color order.

Axes Properties

Axes properties related to the *y*-axis have two values. However, MATLAB gives access only the value for the active side. For example, if the left side is active, then the `YLim` property of the axes object contains the limits for the left *y*-axis. Similarly, if the right side is active, then the `YLim` property contains the limits for the right *y*-axis.

An exception is that the YAxis property of the `Axes` object contains an array of two ruler objects (one for each *y*-axis). You can use the rulers to access each *y*-axis without depending on the active side. For an example, see "Modify Properties of Charts with Two y-Axes".

See Also

See Also

`bar` | `cla` | `hold` | `plot` | `stairs` | `stem`

Topics

"Create Chart with Two y-Axes"
"Modify Properties of Charts with Two y-Axes"

Introduced in R2016a

yyyymmdd

Convert MATLAB datetime to YYYYMMDD numeric value

Syntax

```
d = yyyymmdd(t)
```

Description

`d = yyyymmdd(t)` returns a `double` array containing integers whose digits represent the datetime values in `t`. For example, the date July 16, 2014 is converted to the integer 20140716. The conversion is performed this way:

```
d = 10000*year(t) + 100*month(t) + day(t)
```

Examples

Convert Datetime Array to YYYYMMDD Numeric Values

Create an array of YYYYMMDD numeric values that represent dates.

```
d = [20140628 20140701 20140704]
```

```
d =

    20140628    20140701    20140704
```

Convert the dates to datetime values.

```
t = datetime(d,'ConvertFrom','yyyymmdd')
```

```
t = 1×3 datetime array
   28-Jun-2014 00:00:00   01-Jul-2014 00:00:00   04-Jul-2014 00:00:00
```

Convert the datetime values back to YYYYMMDD numeric values.

```
d2 = yyyymmdd(t)
```

```
d2 =

    20140628    20140701    20140704
```

Input Arguments

t — Input date and time
`datetime` array

Input date and time, specified as a `datetime` array.

Extended Capabilities

Tall Arrays

Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see “Tall Arrays”.

See Also

See Also

`datenum` | `datetime` | `exceltime` | `juliandate` | `posixtime`

Introduced in R2014b

zlabel

Label z-axis

Syntax

```
zlabel(txt)
zlabel(txt,Name,Value)

zlabel(ax, ___ )

h = zlabel( ___ )
```

Description

`zlabel(txt)` labels the *z*-axis of the current axes with the text, `txt`. Reissuing the `zlabel` command causes the new label to replace the old label.

`zlabel(txt,Name,Value)` additionally specifies the text object properties using one or more `Name,Value` pair arguments.

`zlabel(ax, ___ )` adds the label to the axes specified by `ax`. This syntax allows you to specify the axes to which to add a label. `ax` can precede any of the input argument combinations in the previous syntaxes.

`h = zlabel( ___ )` returns the handle to the text object used as the *z*-axis label. The handle is useful when making future modifications to the label.

Examples

Label z-Axis

```
surf(peaks)
zlabel('Height')
```

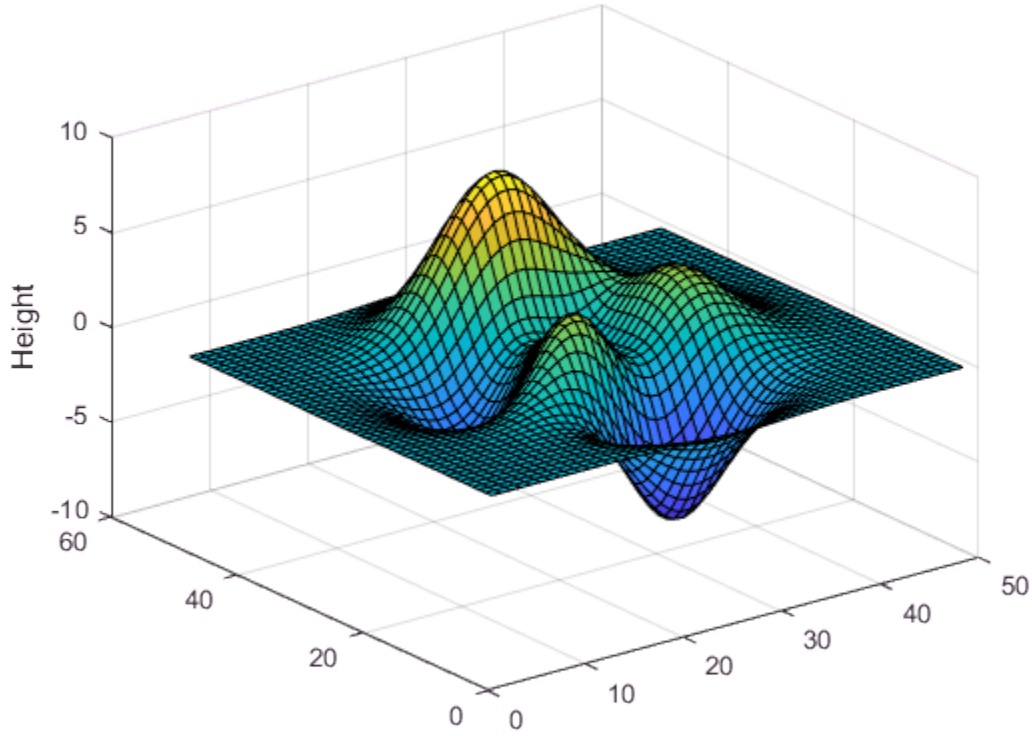

Label z-Axis with Numeric Input

```
figure
surf(peaks)
zlabel(123)
```

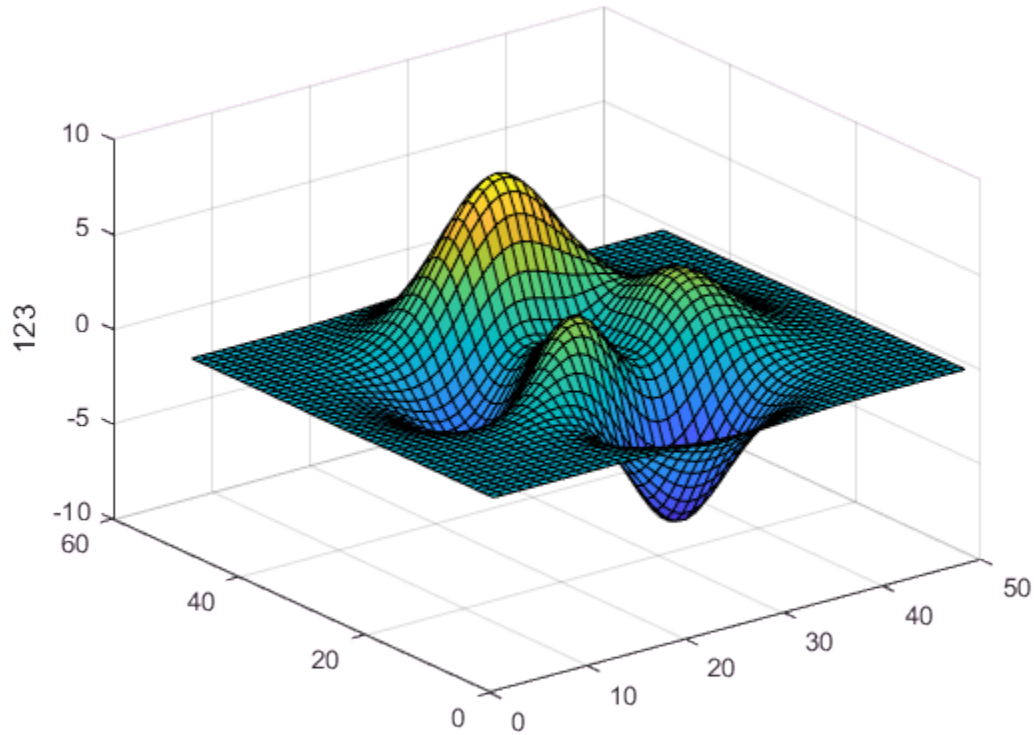

MATLAB® displays 123 beside the *z*-axis.

Create Multiline z-Axis Label

Create a multiline label using a multiline cell array.

```
figure
surf(peaks)
zlabel({'First Line';'Second Line'})
```

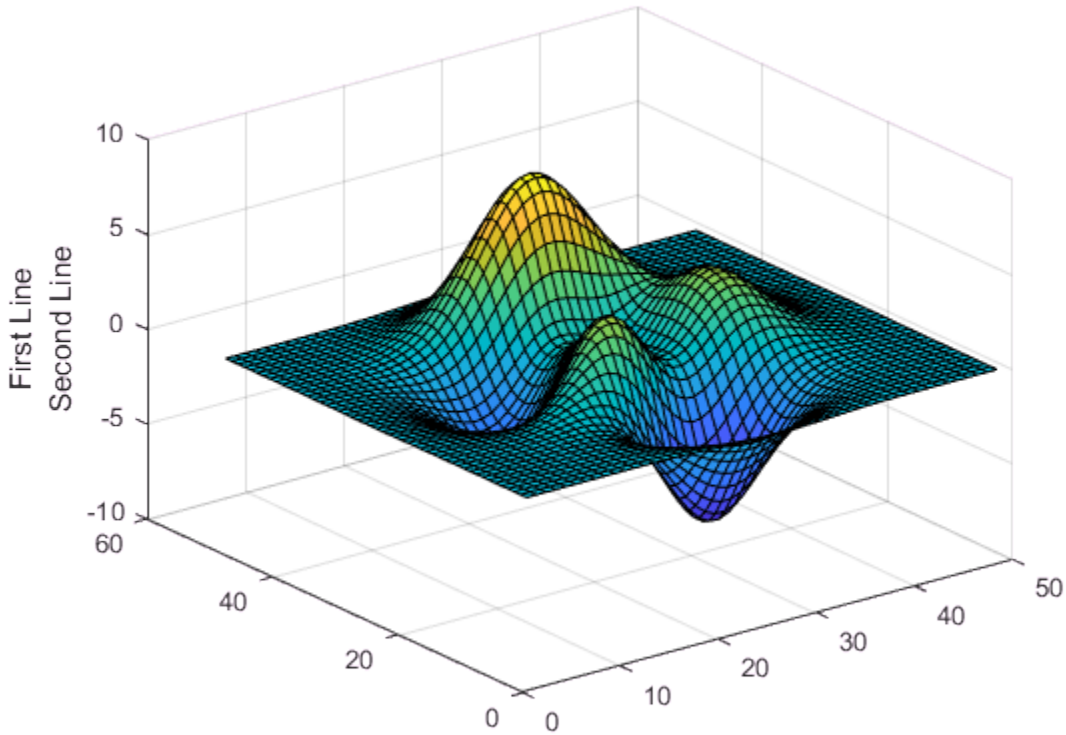

Label z-Axis and Set Font Properties

Use `Name,Value` pairs to set the font size, font weight, and text color properties of the *z*-axis label.

```
figure
surf(peaks)
zlabel('Elevation','FontSize',12,...
       'FontWeight','bold','Color','r')
```

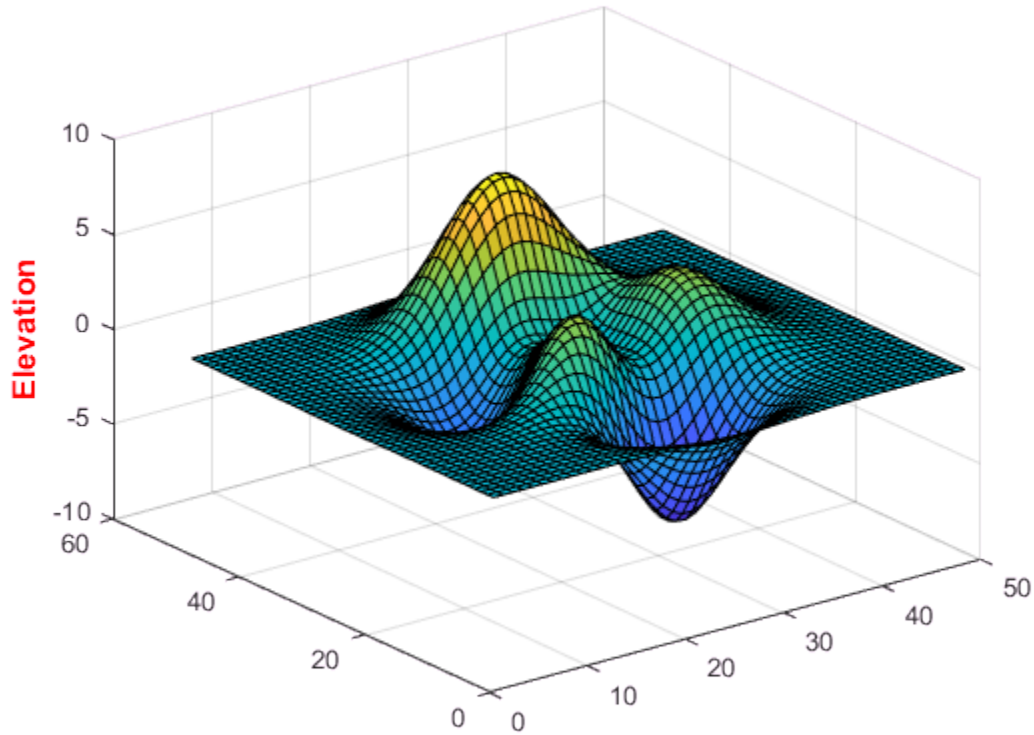

`'FontSize',12` displays the label text in 12-point font. `'FontWeight','bold'` makes the text bold. `'Color','r'` sets the text color to red.

Label z-Axis of Specific Axes

Create two subplots and return the handles to the axes objects, `s(1)` and `s(2)`.

```
figure
s(1) = subplot(2,1,1);
surf(peaks(30))
s(2) = subplot(2,1,2);
surf(peaks(45))
```

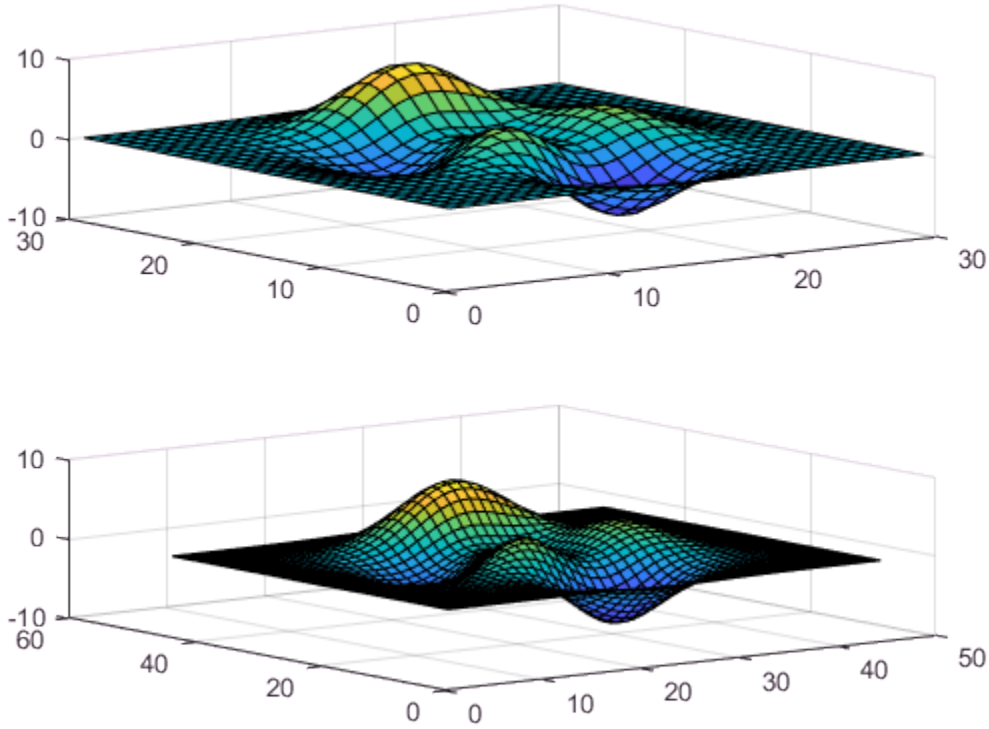

Label the *z*-axis of each plot by referring to the axes handles, `s(1)` and `s(2)`.

```
zlabel(s(1),'Height1')
zlabel(s(2),'Height2')
```

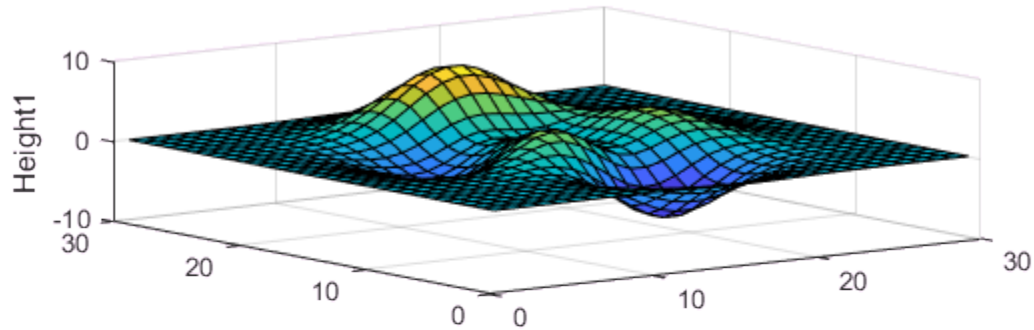

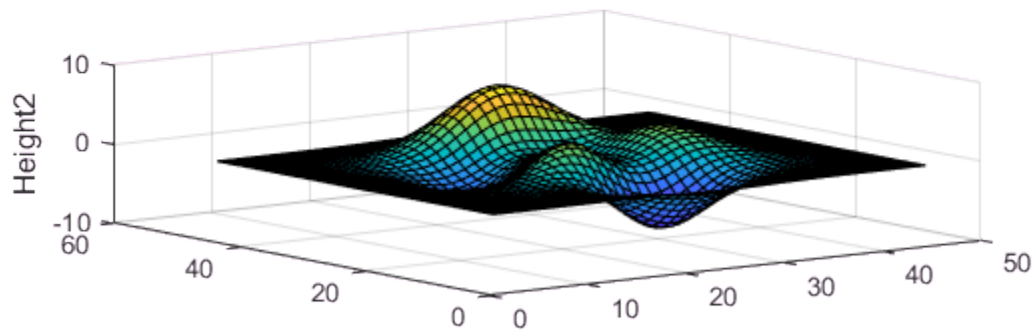

Label z-Axis and Return Object Handle

Label the *z*-axis and return the text object used as the label.

```
surf(peaks)
t = zlabel('Population Change');
```

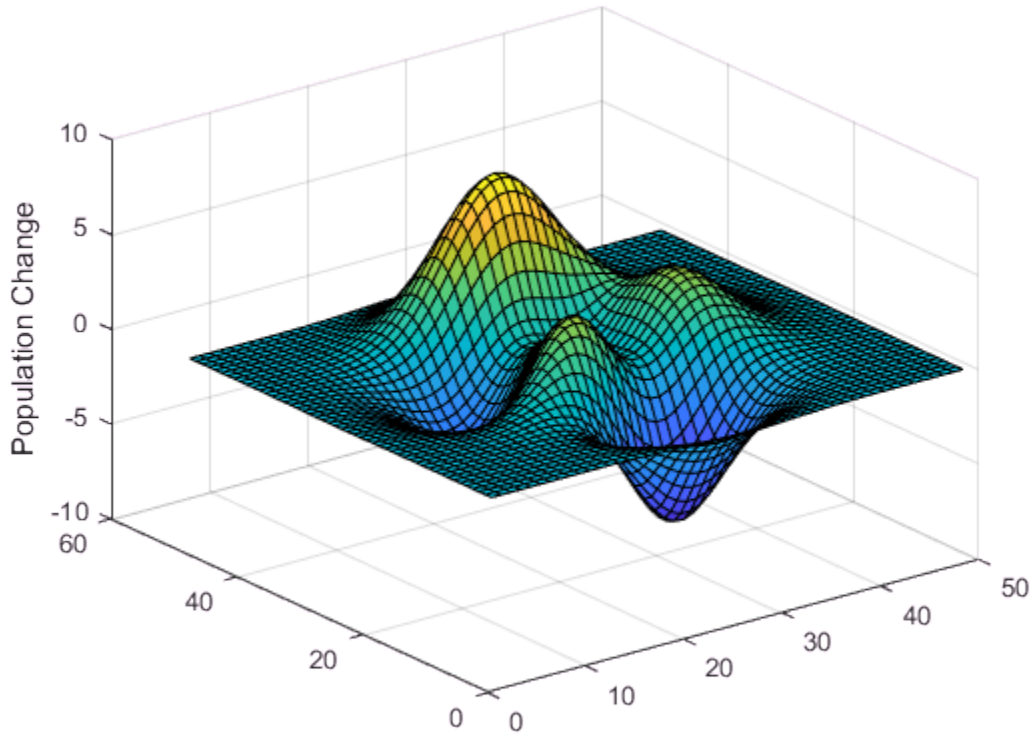

Set the color of the label to red. Starting in R2014b, you can use dot notation to set properties. If you are using an earlier release, use the set function instead.

```
t.Color = 'red';
```

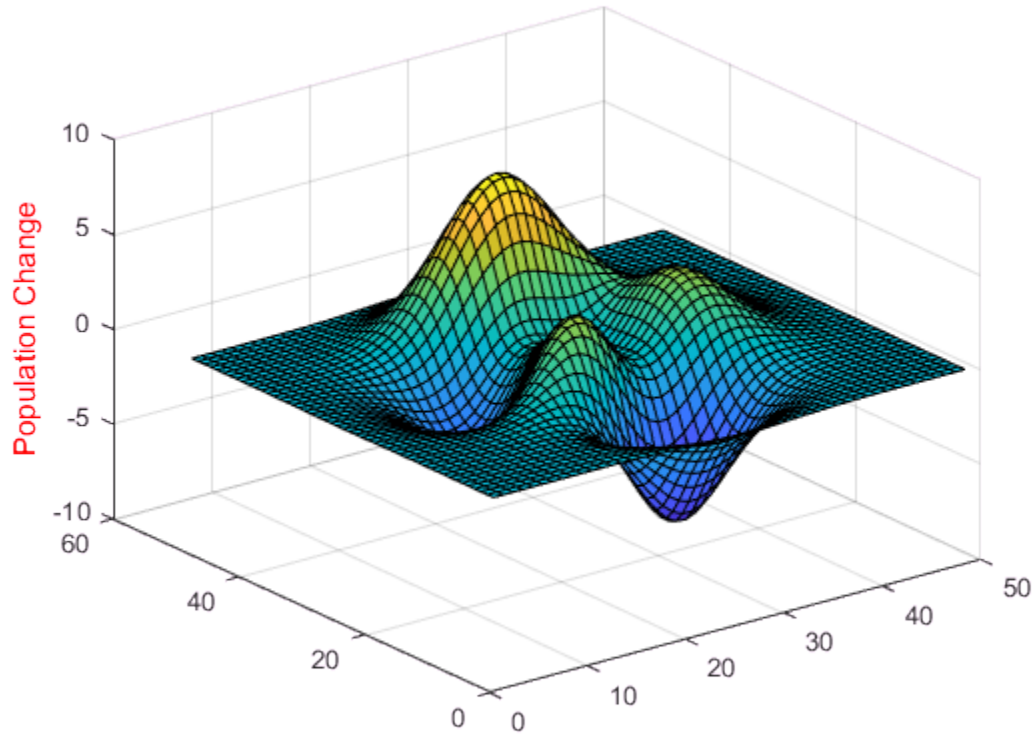

- "Add Text to Graph Interactively"

Input Arguments

`txt` — Axis label

character array | cell array | numeric value

Axis label, specified as a character array, cell array, or numeric value.

Example: `'my label'`

Example: `{'first line','second line'}`

Example: 123

To include numeric variables with text in a label, use the `num2str` function. For example:

```
x = 42;
txt = ['The value is ',num2str(x)];
```

To include special characters, such as superscripts, subscripts, Greek letters, or mathematical symbols use TeX markup. For a list of supported markup, see the `Interpreter` property.

To create multiline labels:

- Use a cell array, where each cell contains a line of text, such as `{'first line','second line'}`.
- Use a character array, where each row contains the same number of characters, such as `['abc'; 'ab ']`.
- Use `sprintf` to create text with a new line character, such as `sprintf('first line \n second line')`.

Numeric labels are converted to text using `sprintf('%g',value)`. For example, `12345678` displays as `1.23457e+07`.

Note: The words `default`, `factory`, and `remove` are reserved words that will not appear in a label when quoted as a normal characters. To display any of these words individually, precede them with a backslash, such as `'\default'` or `'\remove'`.

---

ax — Axes object

axes object

Axes object. If you do not specify an axes, then the `zlabel` function uses the current axes.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Color','red','FontSize',12` specifies red, 12-point font.

In addition to the following, you can specify other text object properties using `Name,Value` pair arguments. See Text Properties.

`'FontSize'` — Font size

`11` (default) | scalar value greater than `0`

Font size, specified as a scalar value greater than `0` in point units. One point equals 1/72 inch. To change the font units, use the FontUnits property.

Setting the font size properties for the associated axes also affects the label font size. The label font size updates to equal the axes font size times the label scale factor. The FontSize property of the axes contains the axes font size. The LabelFontSizeMultiplier property of the axes contains the label scale factor. By default, the axes font size is 10 points and the scale factor is 1.1, so the *z*-axis label font size is 11 points.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`'FontWeight'` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

`'FontName'` — Font name

system supported font name | `'FixedWidth'`

Font name, specified as the name of the font to use or `'FixedWidth'`. To display and print properly, the font name must be a font that your system supports. The default font depends on the specific operating system and locale.

To use a fixed-width font that looks good in any locale, use `'FixedWidth'`. The `'FixedWidth'` value relies on the root FixedWidthFontName property. Setting the root `FixedWidthFontName` property causes an immediate update of the display to use the new font.

Example: `'Cambria'`

`'Color'` — Text color

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector of color name | `'none'`

Text color, specified as a three-element RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the text is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.5 0.6 0.7]`

Example: `'blue'`

`'Interpreter'` — Interpretation of text characters

`'tex'` (default) | `'latex'` | `'none'`

Interpretation of text characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.

- `'latex'` — Interpret characters using LaTeX markup.
- `'none'` — Display literal characters.

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the font type and color, and include special characters in the text.

This table lists the supported modifiers with the `Interpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the characters within the curly braces.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (usually the same as italic font)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`
`\fontname{specifier}`	Font name — Set `specifier` as the name of a font family. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Font size — Set `specifier` as a numeric scalar value in point units to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Font color — Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`,	`'\color{magenta} text'`

Modifier	Description	Example
	`darkGreen`, `orange`, or `lightBlue`.	
`\color[rgb] {specifier}`	Custom font color — Set `specifier` as a three-element RGB triplet.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐
`\vartheta`	ϑ	`\Pi`	Π	`\uparrow`	↑
`\iota`	ι	`\Sigma`	Σ	`\rightarrow`	→
`\kappa`	κ	`\Upsilon`	ϒ	`\Rightarrow`	⇒
`\lambda`	λ	`\Phi`	Φ	`\downarrow`	↓
`\mu`	μ	`\Psi`	Ψ	`\circ`	°
`\nu`	ν	`\Omega`	Ω	`\pm`	±
`\xi`	ξ	`\forall`	∀	`\geq`	≥
`\pi`	π	`\exists`	∃	`\propto`	∝
`\rho`	ρ	`\ni`	∋	`\partial`	∂

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

LaTeX Markup

To use LaTeX markup, set the `Interpreter` property to `'latex'`. Use dollar symbols around the text, for example, use `'$\int_1^{20} x^2 dx$'` for inline mode or `'$$ \int_1^{20} x^2 dx$$'` for display mode.

The displayed text uses the default LaTeX font style. The `FontName`, `FontWeight`, and `FontAngle` properties do not have an effect. To change the font style, use LaTeX markup.

The maximum size of the text that you can use with the LaTeX interpreter is 1200 characters. For multiline text, this reduces by about 10 characters per line.

For more information about the LaTeX system, see The LaTeX Project website at http://www.latex-project.org/.

Output Arguments

h — Text object
text object

Text object used as the *z*-axis label. Use `h` to access and modify properties of the label after its created.

See Also

See Also

Functions
`num2str` | `text` | `title` | `xlabel` | `ylabel`

Properties
Text Properties

Topics
"Add Text to Graph Interactively"

Introduced before R2006a

xlim

Set or query *x*-axis limits

Syntax

```
xlim(limits)
xl = xlim
```

```
xlim auto
xlim manual
m = xlim('mode')
```

```
___ = xlim(ax, ___ )
```

Description

`xlim(limits)` sets the *x*-axis limits for the current axes. Specify `limits` as a two-element vector of the form `[xmin xmax]`, where `xmax` is greater than `xmin`.

`xl = xlim` returns the current limits as a two-element vector.

`xlim auto` sets an automatic mode, enabling the axes to determine the *x*-axis limits. The limits span the range of the plotted data. Use this option if you change the limits and then want to set them back to the default values. This command sets the `XLimMode` property for the axes to `'auto'`.

`xlim manual` sets a manual mode, freezing the limits at the current values. Use this option if you want to retain the current limits when adding new data to the axes using the `hold on` command. This command sets the `XLimMode` property for the axes to `'manual'`.

`m = xlim('mode')` returns the current *x*-axis limits mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify limits or set the mode to manual.

`___ = xlim(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes. You can include an output argument if the original syntax supports an output argument.

Use single quotes around input arguments that are character vectors, for example, `xlim(ax,'auto')`.

Examples

Set *x*-Axis Limits

Plot a line and set the *x*-axis limits to range from 0 to 5.

```
x = linspace(0,10);
y = sin(x);
plot(x,y)
xlim([0 5])
```

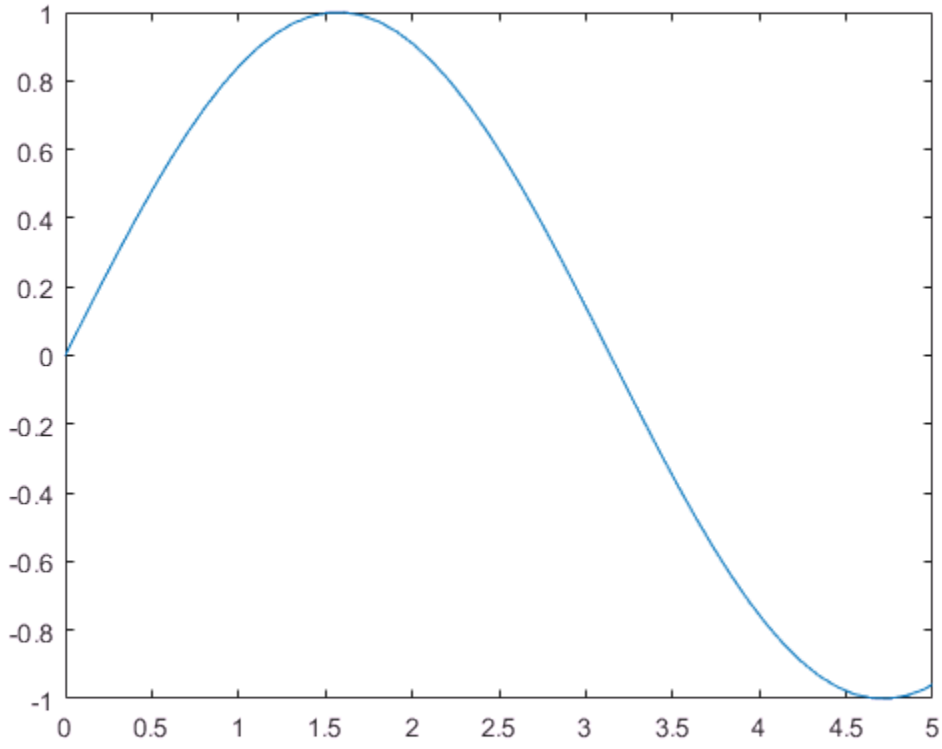

Use Semiautomatic *x*-Axis Limits

Create a surface plot and show only *x* values greater than 0. Specify the minumum *x*-axis limit as 0 and let MATLAB choose the maximum limit.

```
[X,Y,Z] = peaks;
surf(X,Y,Z)
xlim([0 inf])
```

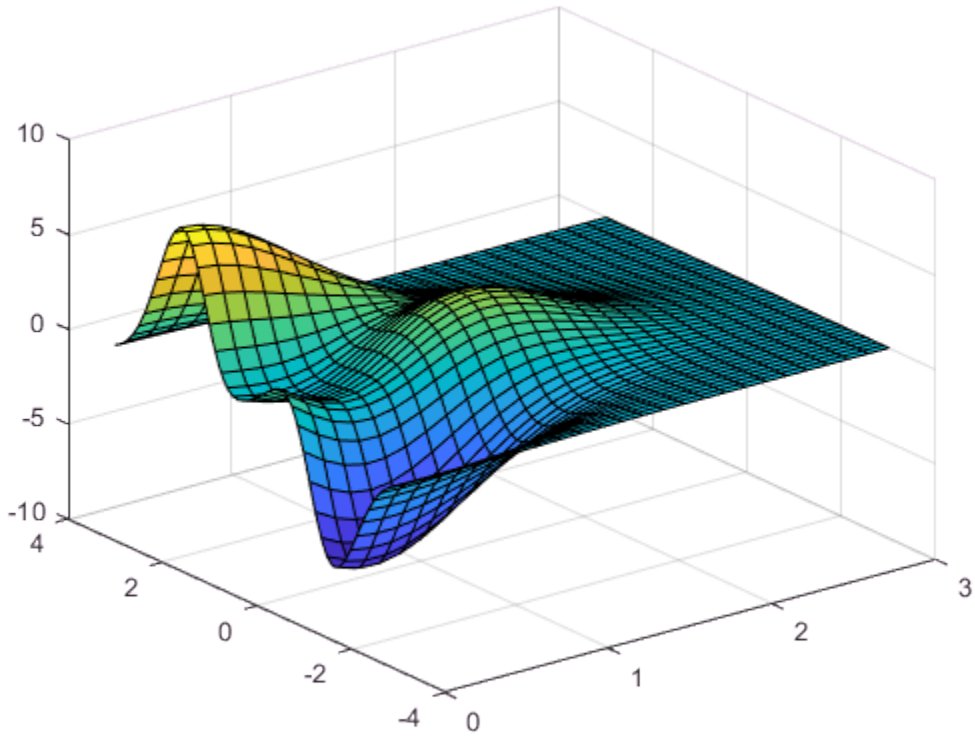

Set Limits for *x*-Axis with Dates

Create a stem chart with dates along the *x*-axis. Set the *x*-axis limits to range from June 1, 2014 to June 5, 2014.

```
t = datetime(2014,06,1) + caldays(0:10);
y = rand(11,1);
stem(t,y,'filled')

tstart = datetime(2014,06,1);
tend = datetime(2014,06,5);
xlim([tstart tend])
```

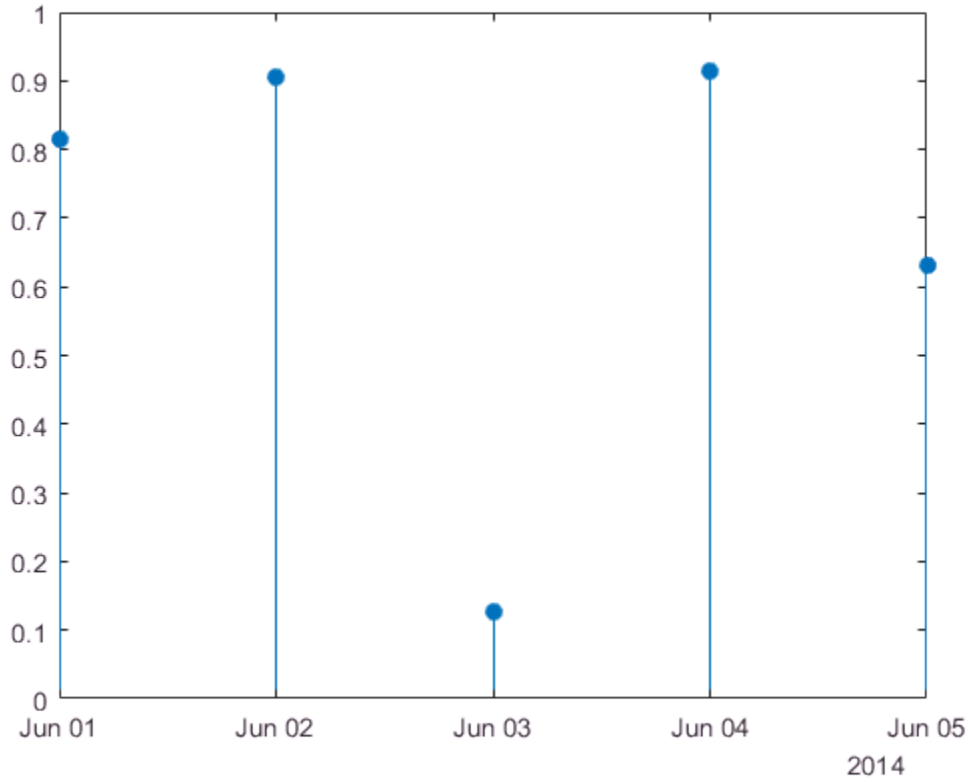

Set *x*-Axis Limits for Specific Axes

Create a figure with two subplots and assign the `Axes` objects to the variables `ax1` and `ax2`. Plot the same data in each subplot. Set the *x*-axis limits for the bottom subplot by specifying `ax2` as the first input argument to `xlim`.

```
x = linspace(0,5,1000);
y = sin(100*x)./exp(x);
ax1 = subplot(2,1,1);
plot(x,y)

ax2 = subplot(2,1,2);
plot(x,y)
xlim(ax2,[0 1])
```

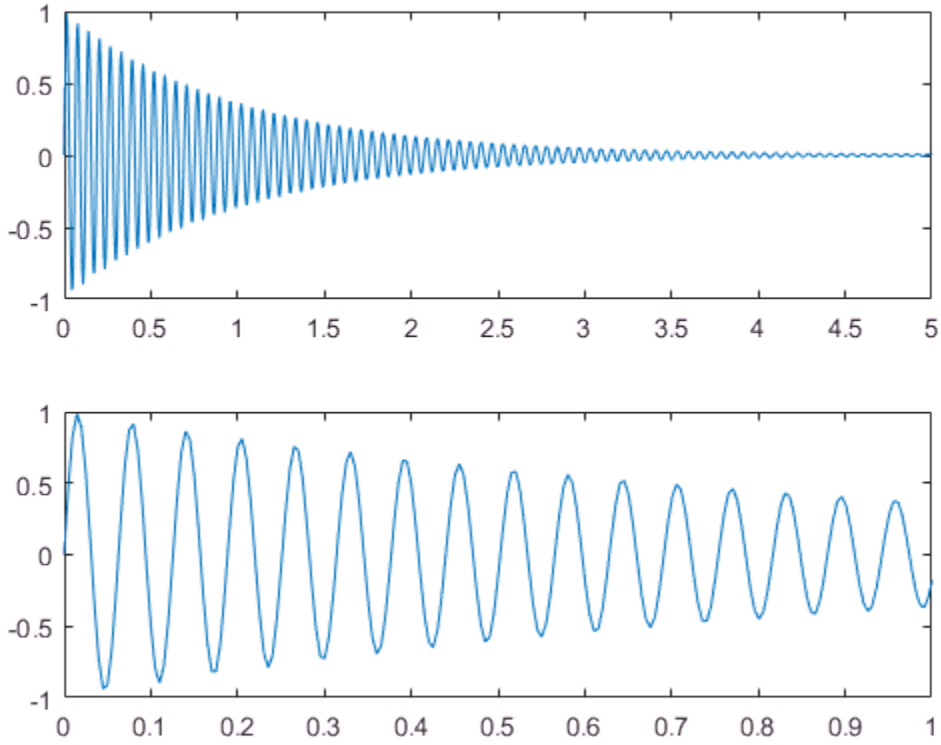

Maintain Current *x*-Axis Limits

Use manual mode to maintain the current x-axis limits when you add more plots to the axes.

First, plot a line.

```
x = linspace(0,10);
y = sin(x);
plot(x,y);
```

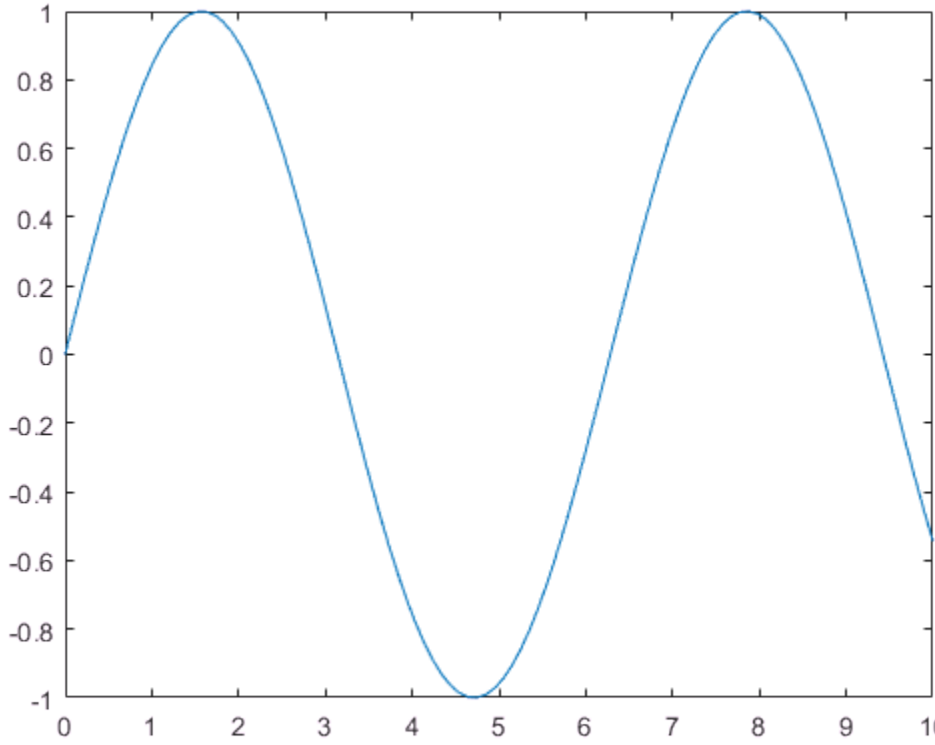

Set the *x*-axis limits mode to manual so that the limits do not change. Use `hold on` to add a second plot to the axes.

```
xlim manual
hold on
plot(2*x,2*y)
hold off
```

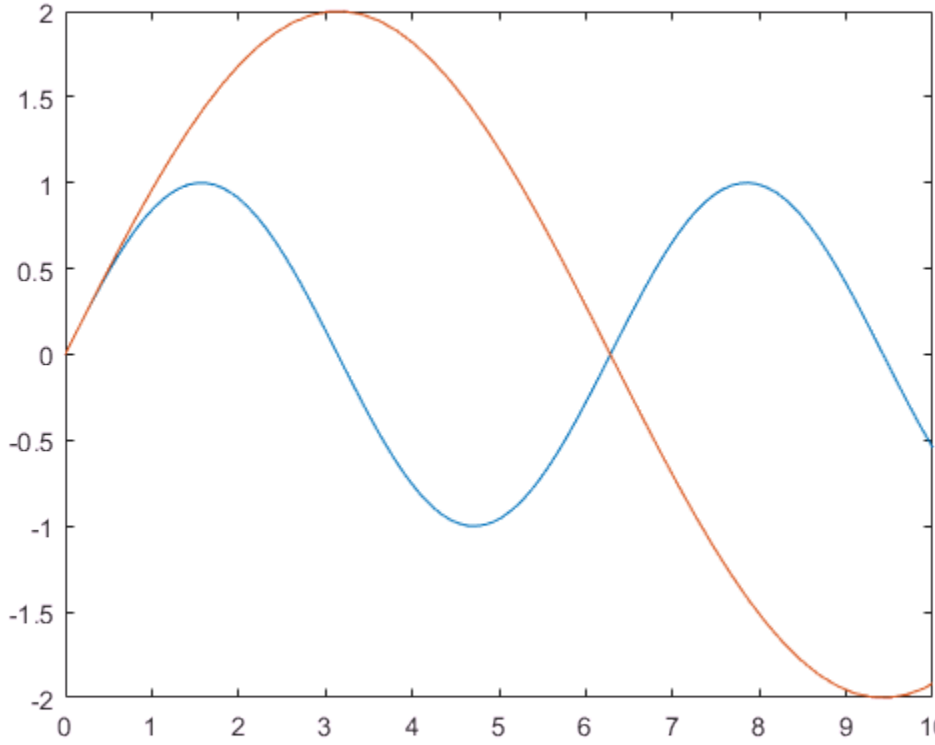

The *x*-axis limits do not update to incorporate the new plot.

Switch back to automatically updated limits by resetting the mode to automatic.

```
xlim auto
```

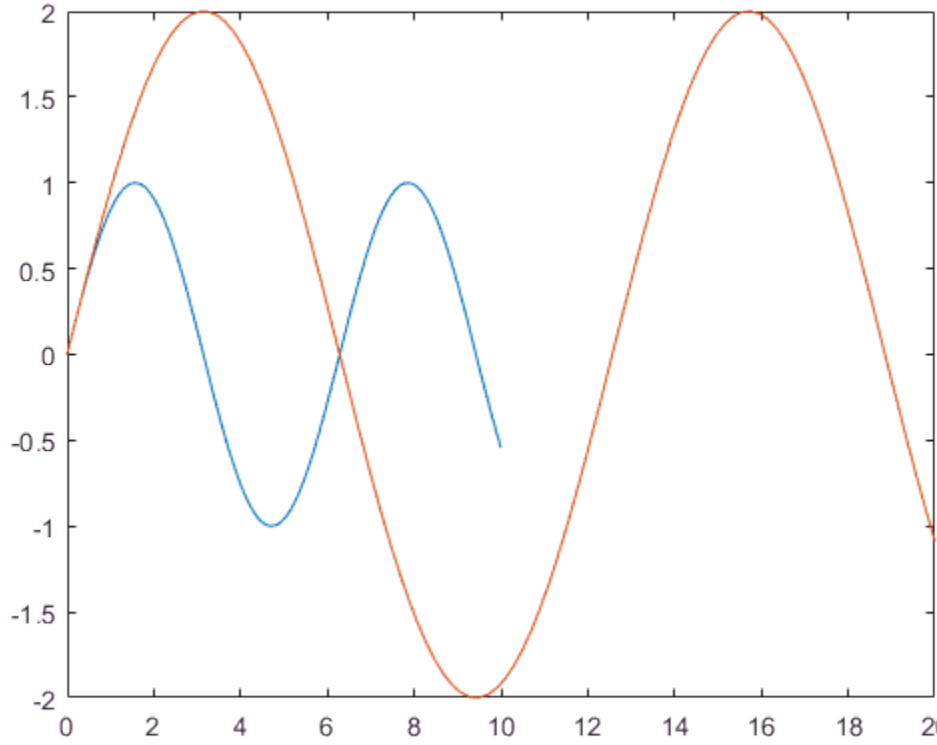

Return *x*-Axis Limits

Create a scatter plot of random data. Return the values of the *x*-axis limits.

```
x = randn(50,1);
y = randn(50,1);
scatter(x,y)
```

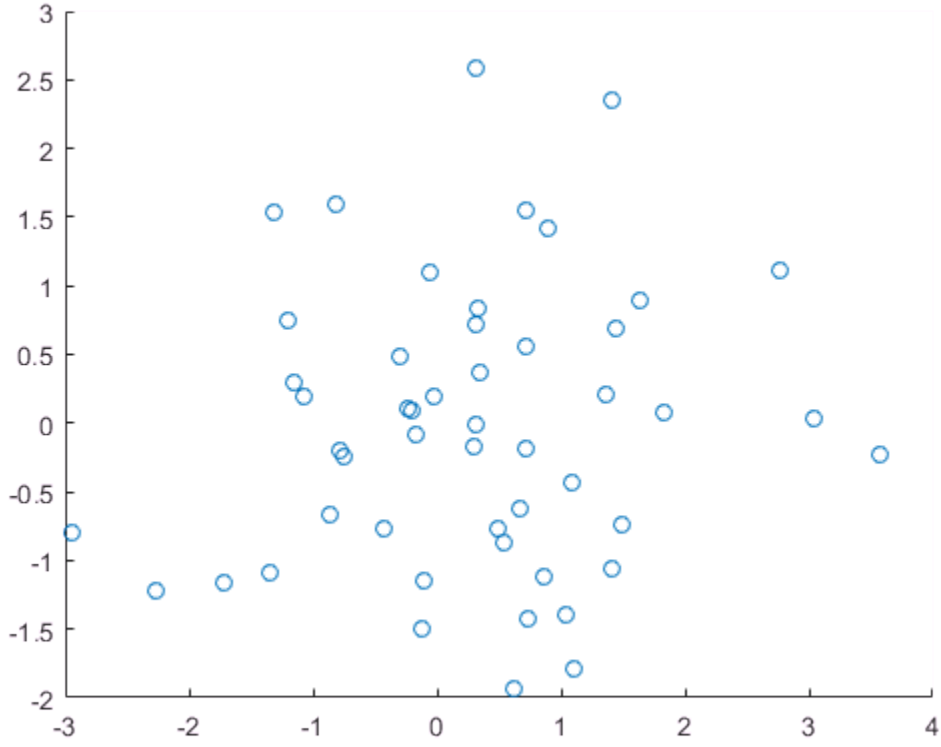


```
xl = xlim
```

```
xl =

    -3     4
```

- “Specify Axis Limits”

Input Arguments

`limits` — Minimum and maximum limits

two-element vector

Minimum and maximum limits, specified as a two-element vector of the form `[xmin xmax]`, where `xmax` is greater than `xmin`. You can specify the limits as numeric, categorical, datetime, or duration values. However, the type of values that you specify must match the type of values along the *x*-axis.

You can specify both limits, or specify one limit and let MATLAB automatically calculate the other. For an automatically calculated minimum or maximum limit, use `-inf` or `inf`, respectively.

Example: `xlim([0 1])`

Example: `xlim([-inf 1])`

Example: `xlim([0 inf])`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ax` — `Axes` object

`Axes` object

`Axes` object. If you do not specify an `Axes` object, then `xlim` sets the limits for the current axes (`gca`).

Output Arguments

`xl` — Current limits

two-element vector

Current limits, returned as a two-element vector of the form `[xmin xmax]`.

Querying the limits returns the XLim property value for the corresponding `Axes` object.

`m` — Current limits mode

`'auto'` | `'manual'`

Current limits mode, returned as one of these values:

- `'auto'` — Automatically determine the limits.
- `'manual'` — Use manually specified limits that do not update to reflect changes in the data.

Querying the *x*-axis limits mode returns XLimMode property value for the corresponding `Axes` object.

Algorithms

The `xlim` function sets and queries several axes properties related to the *x*-axis limits.

- XLim — Property that stores the *x*-axis limits.
- XLimMode — Property that stores the *x*-axis limits mode. When you set the *x*-axis limits, this property changes to `'manual'`.

See Also

See Also

Functions

`grid` | `xlabel` | `xtickformat` | `xticklabels` | `xticks` | `ylim` | `zlim`

Properties

Axes Properties

Topics

"Specify Axis Limits"

Introduced before R2006a

ylim

Set or query *y*-axis limits

Syntax

```
ylim(limits)
yl = ylim
```

```
ylim auto
ylim manual
m = ylim('mode')
```

```
___ = ylim(ax, ___ )
```

Description

`ylim(limits)` sets the *y*-axis limits for the current axes. Specify `limits` as a two-element vector of the form `[ymin ymax]`, where `ymax` is greater than `ymin`.

`yl = ylim` returns the current limits as a two-element vector.

`ylim auto` sets an automatic mode, enabling the axes to determine the *y*-axis limits. The limits span the range of the plotted data. Use this option if you change the limits and then want to set them back to the default values. This command sets the `YLimMode` property for the axes to `'auto'`.

`ylim manual` sets a manual mode, freezing the limits at the current values. Use this option if you want to retain the current limits when adding new data to the axes using the `hold on` command. This command sets the `YLimMode` property for the axes to `'manual'`.

`m = ylim('mode')` returns the current *y*-axis limits mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify limits or set the mode to manual.

`___ = ylim(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes. You can include an output argument if the original syntax supports an output argument.

Use single quotes around input arguments that are character vectors, for example, `ylim(ax,'auto')`.

Examples

Set *y*-Axis Limits

Plot a line and set the *y*-axis limits to range from -2 to 2.

```
x = linspace(0,10);
y = sin(x);
plot(x,y)
ylim([-2 2])
```

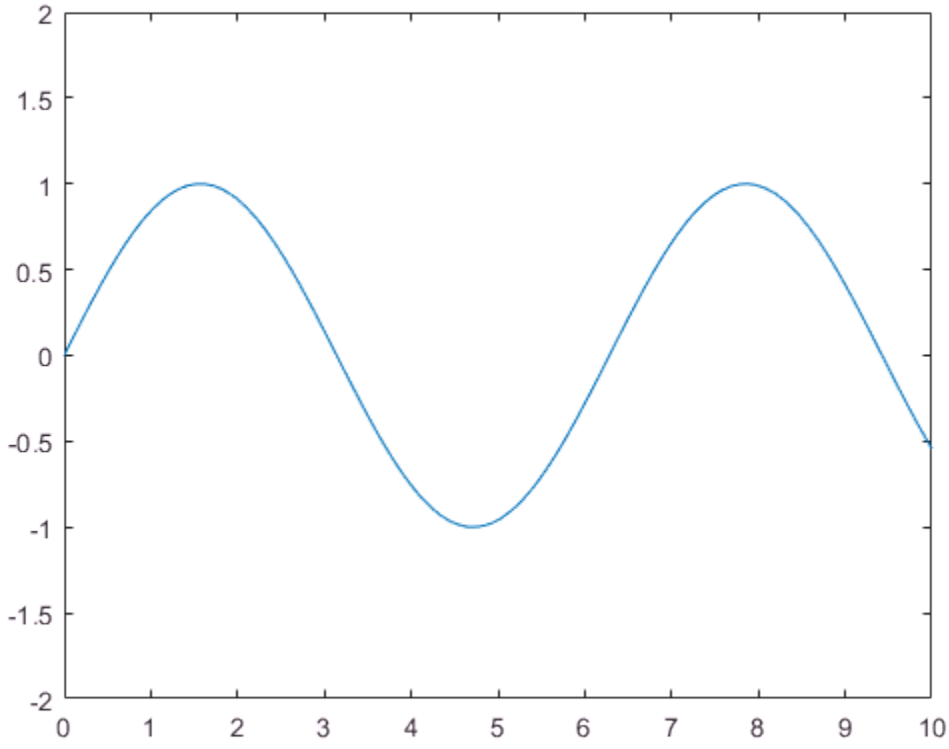

Use Semiautomatic *y*-Axis Limits

Create a surface plot and show only *y* values greater than 0. Specify the minumum *y*-axis limit as 0 and let MATLAB choose the maximum limit.

```
[X,Y,Z] = peaks;
surf(X,Y,Z)
ylim([0 inf])
```

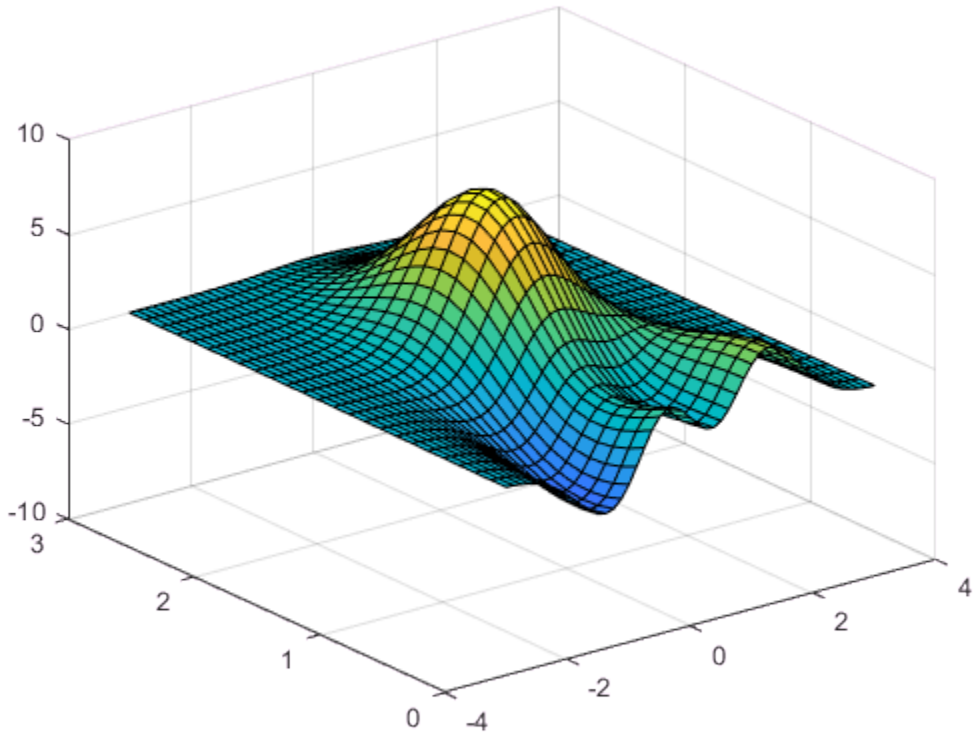

Set Limits for *y*-Axis with Dates

Create a horizontal bar chart with dates along the y-axis. Set the y-axis limits to range from June 1, 2014 to June 10, 2014.

```
t = datetime(2014,06,1) + caldays(0:20);
y = rand(21,1);
barh(t,y)

tstart = datetime(2014,06,1);
tend = datetime(2014,06,10);
ylim([tstart tend])
```

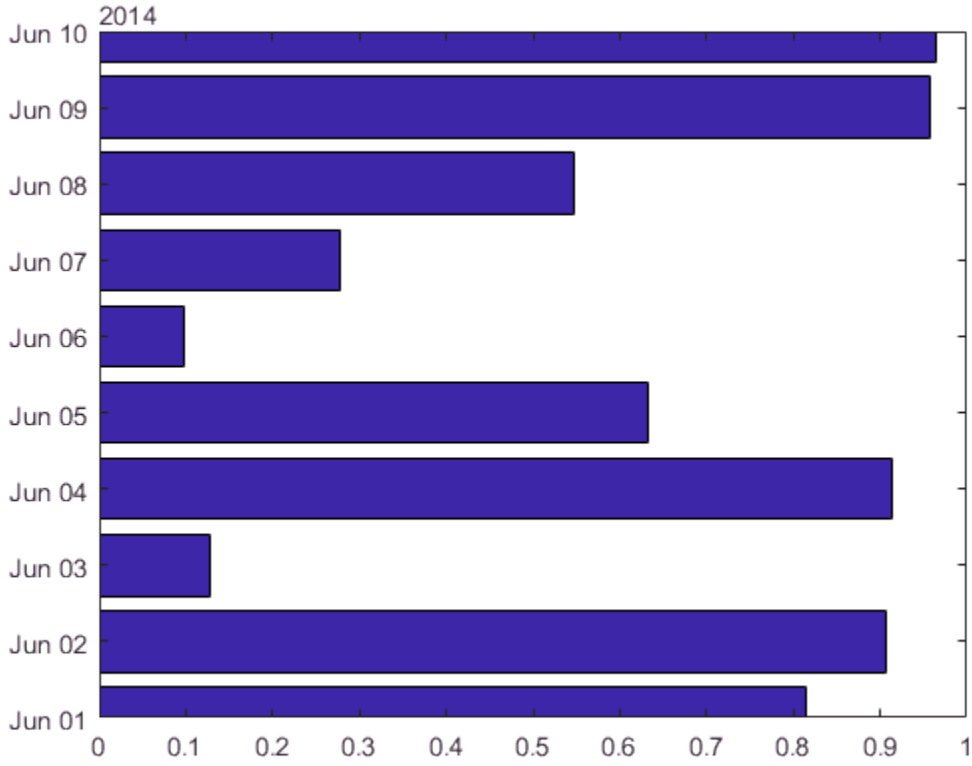

Set *y*-Axis Limits for Specific Axes

Create a figure with two subplots and assign the `Axes` objects to the variables `ax1` and `ax2`. Plot the same data in each subplot. Set the *y*-axis limits for the bottom subplot by specifying `ax2` as the first input to `ylim`.

```
x = linspace(0,10,1000);
y = sin(10*x).*exp(.5*x);
ax1 = subplot(2,1,1);
plot(x,y)

ax2 = subplot(2,1,2);
plot(x,y)
ylim(ax2,[-10 10])
```

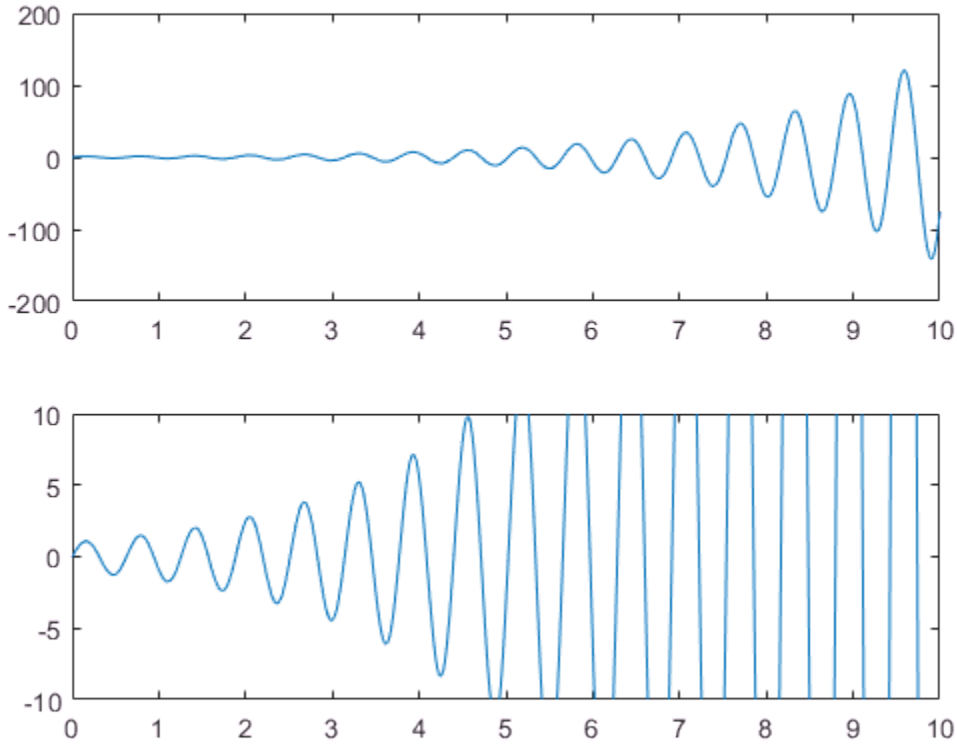

Maintain Current *y*-Axis Limits

Use manual mode to maintain the current *y*-axis limits when you add more plots to the axes.

First, plot a line.

```
x = linspace(0,10);
y = sin(x);
plot(x,y)
```

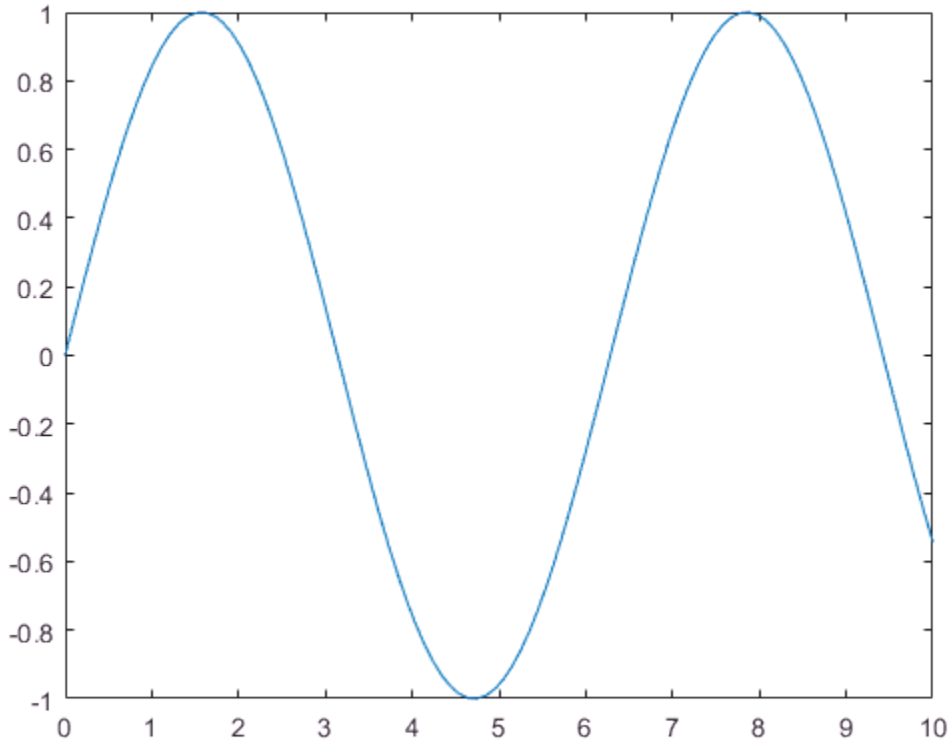

Set the *y*-axis limits mode to manual so that the limits to not change. Use `hold on` to add a second plot to the axes.

```
ylim manual
hold on
y2 = 2*sin(x);
plot(x,y2)
hold off
```

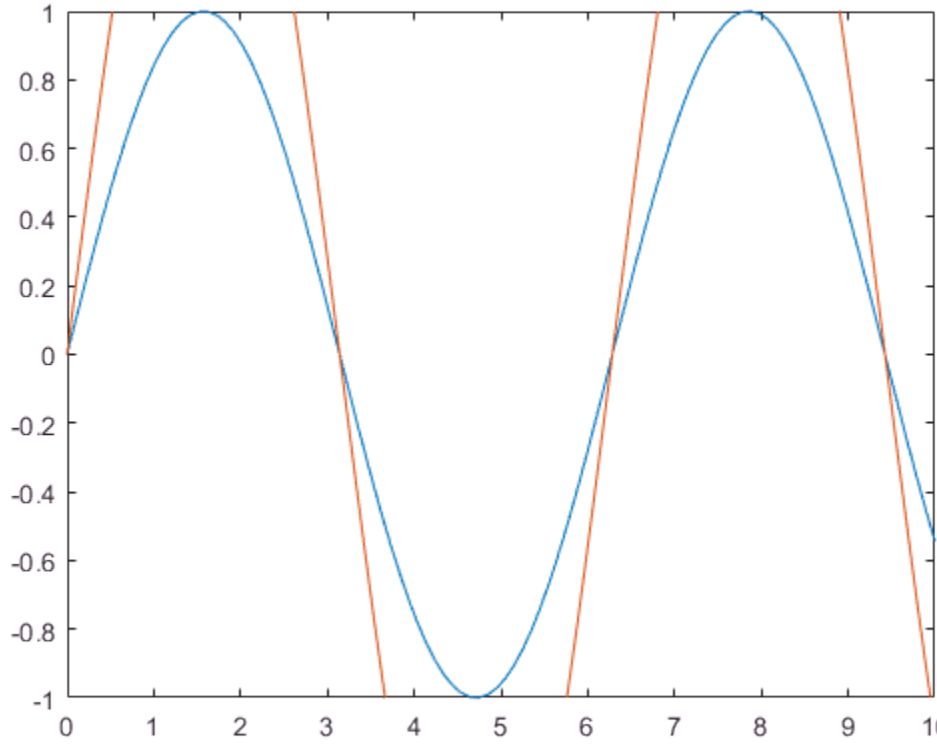

The *y*-axis limits do not update to incorporate the new plot.

Switch back to automatically updated limits by resetting the mode to automatic.

```
ylim auto
```

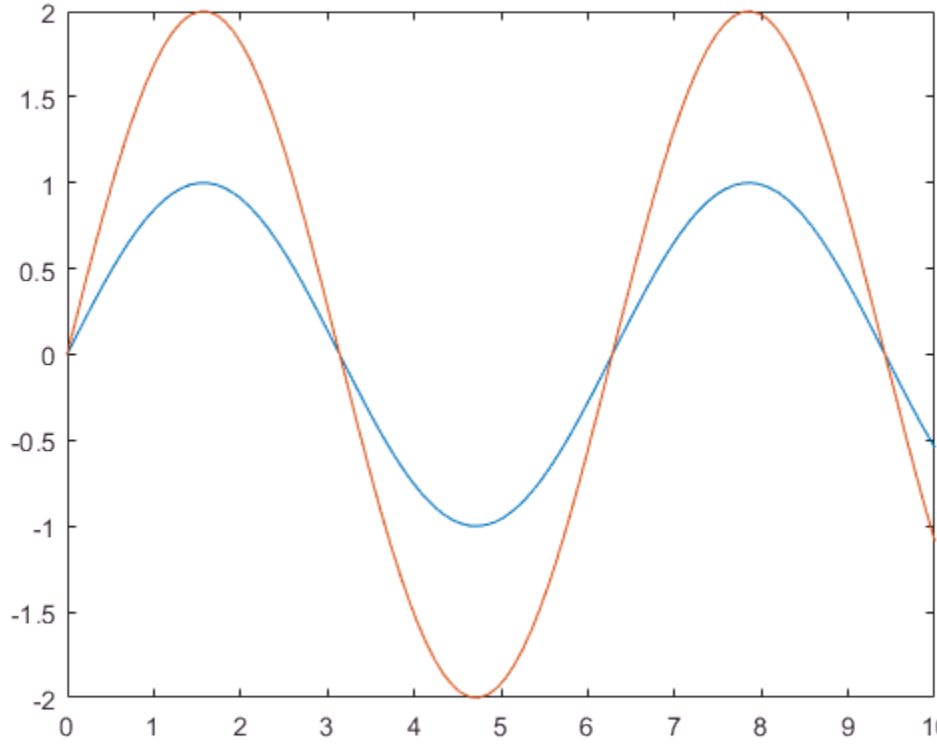

Return *y*-Axis Limits

Create a scatter plot of random data. Return the values of the *y*-axis limits.

```
x = randn(50,1);
y = randn(50,1);
scatter(x,y)
```

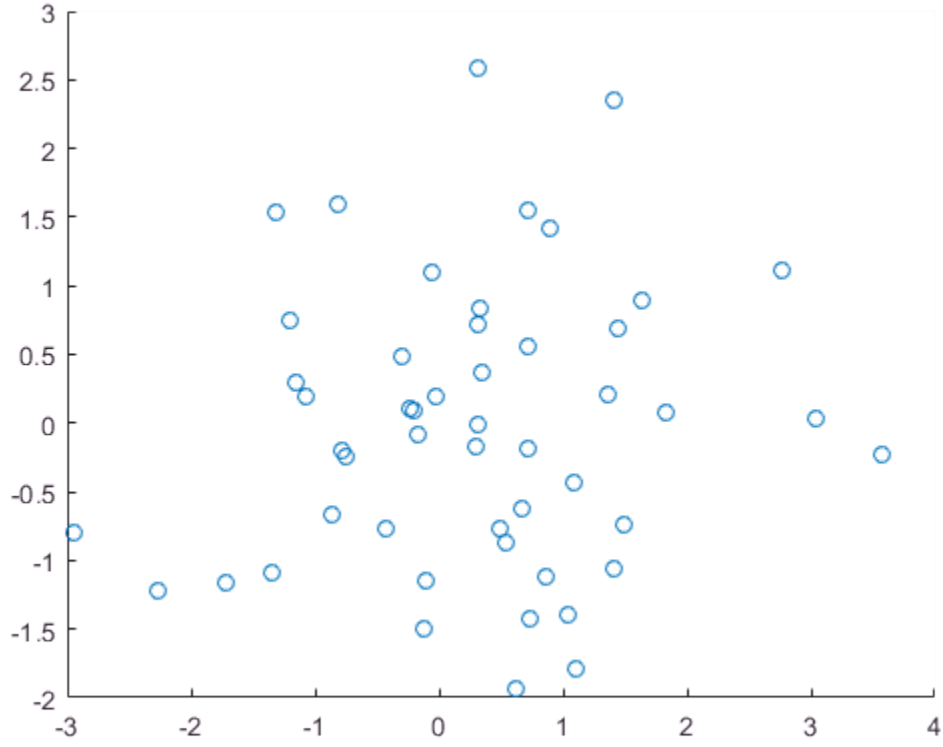


```
yl =  ylim
```

```
yl =

    -2     3
```

- “Specify Axis Limits”

Input Arguments

`limits` — Minimum and maximum limits

two-element vector

Minimum and maximum limits, specified as a two-element vector of the form `[ymin ymax]`, where `ymax` is greater than `ymin`. You can specify the limits as numeric, categorical, datetime, or duration values. However, the type of values that you specify must match the type of values along the *y*-axis.

You can specify both limits, or specify one limit and let MATLAB automatically calculate the other. For an automatically calculated minimum or maximum limit, use `-inf` or `inf`, respectively.

Example: `ylim([0 1])`

Example: `ylim([-inf 1])`

Example: `ylim([0 inf])`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ax` — `Axes` object

`Axes` object

`Axes` object. If you do not specify an `Axes` object, then `ylim` sets the limits for the current axes (`gca`).

Output Arguments

`yl` — Current limits

two-element vector

Current limits, returned as a two-element vector of the form `[ymin ymax]`.

Querying the limits returns the YLim property value for the corresponding `Axes` object.

`m` — Current limits mode

`'auto'` | `'manual'`

Current limits mode, returned as one of these values:

- `'auto'` — Automatically determine the limits.
- `'manual'` — Use manually specified limits that do not update to reflect changes in the data.

Querying the *y*-axis limits mode returns YLimMode property value for the corresponding `Axes` object.

Algorithms

The `ylim` function sets and queries several axes properties related to the *y*-axis limits.

- YLim — Property that stores the *y*-axis limits.
- YLimMode — Property that stores the *y*-axis limits mode. When you set the *y*-axis limits, this property changes to `'manual'`.

See Also

See Also

Functions

`grid` | `xlim` | `ylabel` | `ytickformat` | `yticklabels` | `yticks` | `zlim`

Properties

Axes Properties

Topics

"Specify Axis Limits"

Introduced before R2006a

zlim

Set or query *z*-axis limits

Syntax

```
zlim(limits)
zl = zlim
```

```
zlim auto
zlim manual
m = zlim('mode')
```

```
___ = zlim(ax,___)
```

Description

`zlim(limits)` sets the *z*-axis limits for the current axes. Specify `limits` as a two-element vector of the form `[zmin zmax]`, where `zmax` is greater than `zmin`.

`zl = zlim` returns the current limits as a two-element vector.

`zlim auto` sets an automatic mode, enabling the axes to determine the *z*-axis limits. The limits span the range of the plotted data. Use this option if you change the limits and then want to set them back to the default values. This command sets the `ZLimMode` property for the axes to `'auto'`.

`zlim manual` sets a manual mode, freezing the limits at the current values. Use this option if you want to retain the current limits when adding new data to the axes using the `hold on` command. This command sets the `ZLimMode` property for the axes to `'manual'`.

`m = zlim('mode')` returns the current *z*-axis limits mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify limits or set the mode to manual.

`___ = zlim(ax,___)` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes. You can include an output argument if the original syntax supports an output argument.

Use single quotes around input arguments that are character vectors, for example, `zlim(ax,'auto')`.

Examples

Set *z*-Axis Limits

Plot a surface and set the *z*-axis limits to range from -5 to 5.

```
[X,Y,Z] = peaks;
surf(X,Y,Z);
zlim([-5 5])
```

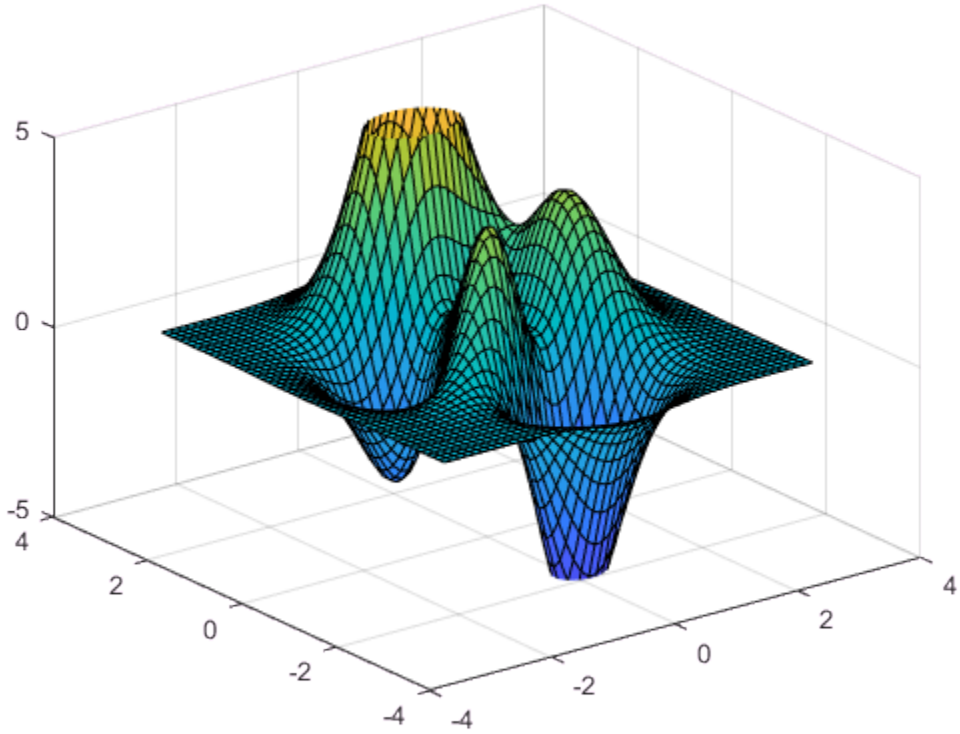

Use Semiautomatic *z*-Axis Limits

Create a mesh surface plot and show only *z* values greater than 0. Specify the minumum *z*-axis limit as 0 and let MATLAB choose the maximum limit.

```
[X,Y,Z] = peaks;
mesh(X,Y,Z)
zlim([0 inf])
```

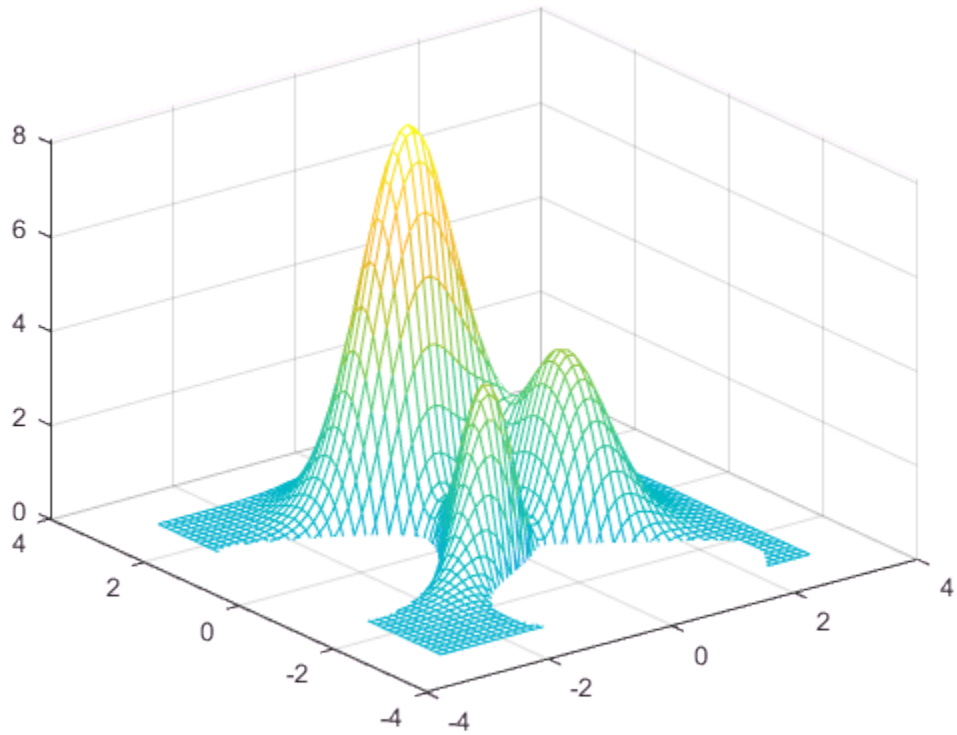

Set *z*-Axis Limits for Specific Axes

Create a figure with two subplots and assign the `Axes` objects to variables `ax1` and `ax2`. Plot the same data in each subplot. Set the *z*-axis limits for the bottom subplot by specifying `ax2` as the first input argument to `zlim`.

```
[X,Y,Z] = peaks;
ax1 = subplot(2,1,1);
surf(X,Y,Z)

ax2 = subplot(2,1,2);
surf(X,Y,Z)
zlim(ax2,[-5 5])
```

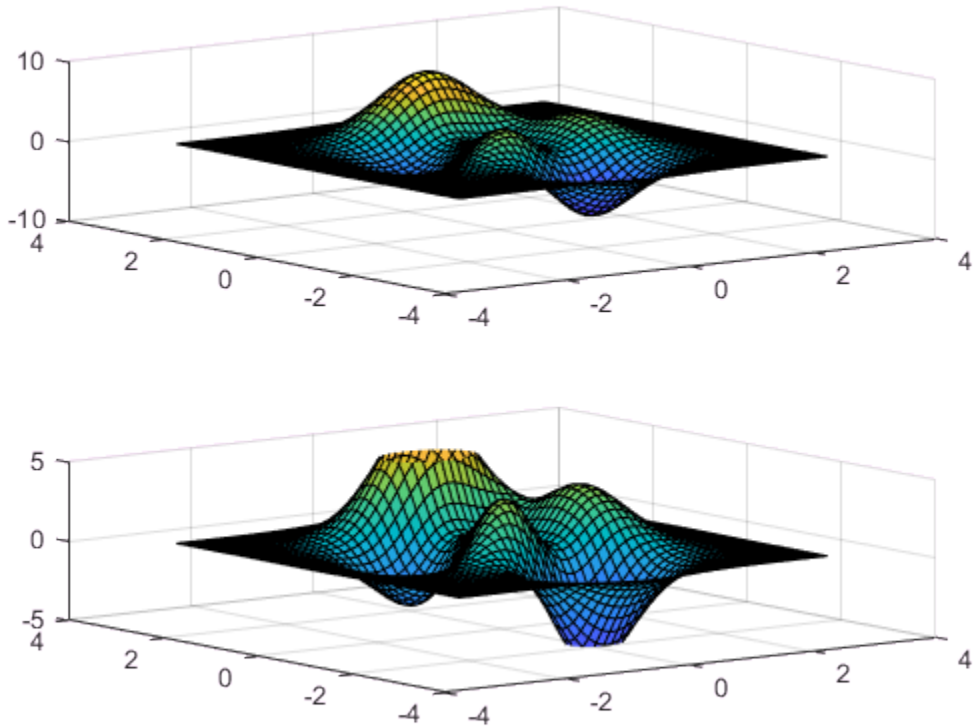

Maintain Current z-Axis Limits

Use manual mode to maintain the current z-axis limits when you add more plots to the axes.

First, create a 3-D scatter plot.

```
theta = linspace(0,2*pi);
X = cos(theta);
Y = sin(theta);
Z = theta;
scatter3(X,Y,Z)
```

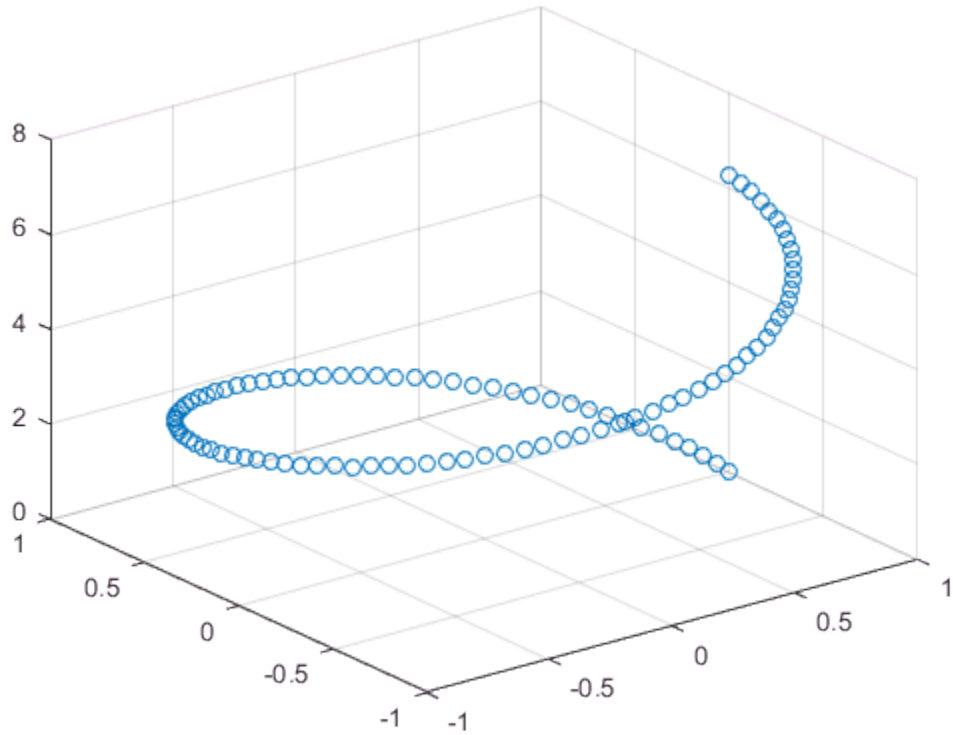

Set the *z*-axis limits mode to manual so that the limits to not change. Use `hold on` to add a second plot to the axes.

```
zlim manual
hold on
Znew = 5*theta;
scatter3(X,Y,Znew)
hold off
```

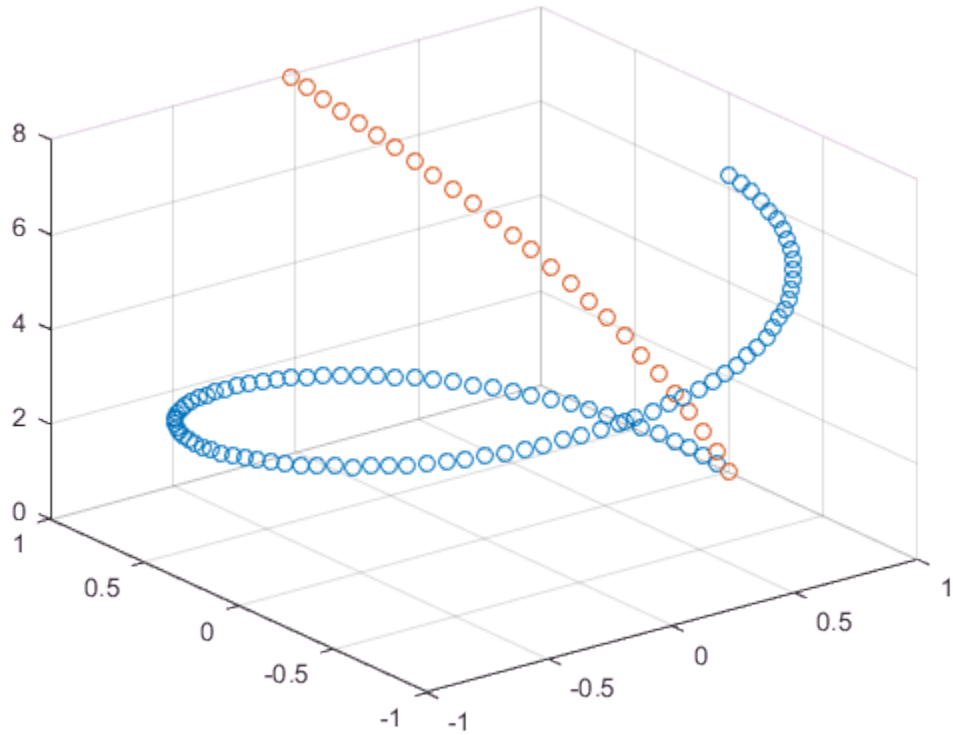

The *z*-axis limits do not update to incorporate the new plot.

Switch back to automatically updated limits by setting the mode to automatic.

```
zlim auto
```

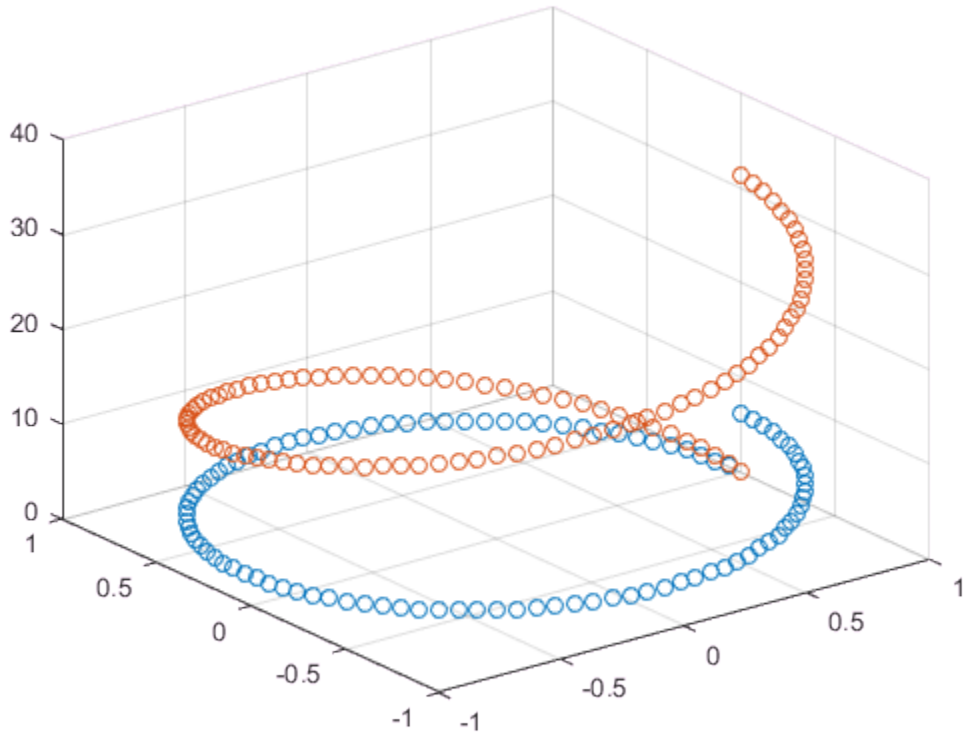

Return *z*-Axis Limits

Create a 3-D scatter plot of random data. Return the values of the *z*-axis limits.

```
x = randn(50,1);
y = randn(50,1);
z = randn(50,1);
scatter3(x,y,z)
```

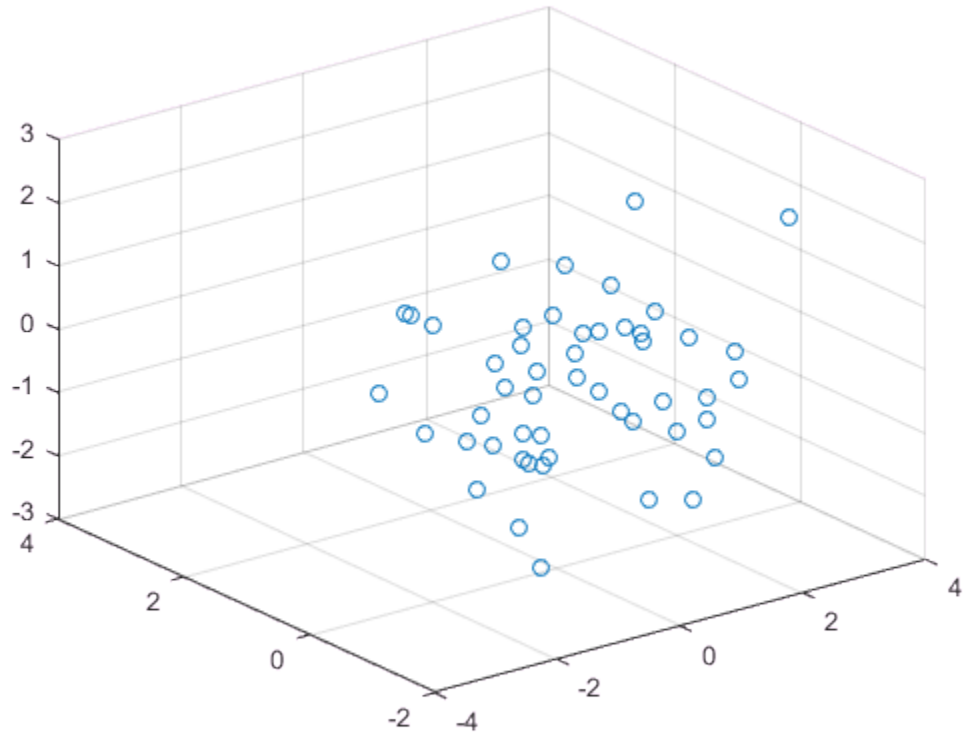


```
zl = zlim
```

```
zl =

    -3     3
```

- “Specify Axis Limits”

Input Arguments

`limits` — Minimum and maximum limits

two-element vector

Minimum and maximum limits, specified as a two-element vector of the form `[zmin zmax]`, where `zmax` is greater than `zmin`. You can specify the limits as numeric, categorical, datetime, or duration values. However, the type of values that you specify must match the type of values along the *z*-axis.

You can specify both limits, or specify one limit and let MATLAB automatically calculate the other. For an automatically calculated minimum or maximum limit, use `-inf` or `inf`, respectively.

Example: `zlim([0 1])`

Example: `zlim([-inf 1])`

Example: `zlim([0 inf])`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ax` — `Axes` object

`Axes` object

`Axes` object. If you do not specify an `Axes` object, then `zlim` sets the limits for the current axes (`gca`).

Output Arguments

`zl` — Current limits

two-element vector

Current limits, returned as a two-element vector of the form `[zmin zmax]`.

Querying the limits returns the ZLim property value for the corresponding `Axes` object.

`m` — Current limits mode

`'auto'` | `'manual'`

Current limits mode, returned as one of these values:

- `'auto'` — Automatically determine the limits.
- `'manual'` — Use manually specified limits that do not update to reflect changes in the data.

Querying the *z*-axis limits mode returns ZLimMode property value for the corresponding `Axes` object.

Algorithms

The `zlim` function sets and queries several axes properties related to the *z*-axis limits.

- ZLim — Property that stores the *z*-axis limits.
- ZLimMode — Property that stores the *z*-axis limits mode. When you set the *z*-axis limits, this property changes to `'manual'`.

See Also

See Also

Functions

`grid` | `xlim` | `ylim` | `zlabel` | `ztickformat` | `zticklabels` | `zticks`

Properties

Axes Properties

Topics

"Specify Axis Limits"

Introduced before R2006a

ztickangle

Rotate *z*-axis tick labels

Syntax

```
ztickangle(angle)
ztickangle(ax,angle)

ang = ztickangle
ang = ztickangle(ax)
```

Description

`ztickangle(angle)` rotates the *z*-axis tick labels for the current axes to the specified angle in degrees, where `0` is horizontal. Specify a positive value for counterclockwise rotation or a negative value for clockwise rotation.

`ztickangle(ax,angle)` rotates the tick labels for the axes specified by `ax` instead of the current axes.

`ang = ztickangle` returns the rotation angle for the *z*-axis tick labels of the current axes as a scalar value in degrees. Positive values indicate counterclockwise rotation. Negative values indicate clockwise rotation.

`ang = ztickangle(ax)` uses the axes specified by `ax` instead of the current axes.

Examples

Rotate z-Axis Tick Labels

Create a surface chart and rotate the *z*-axis tick labels 45 degrees clockwise.

```
[x,y,z] = peaks;
surf(x,y,z)
```

```
ztickangle(-45)
```

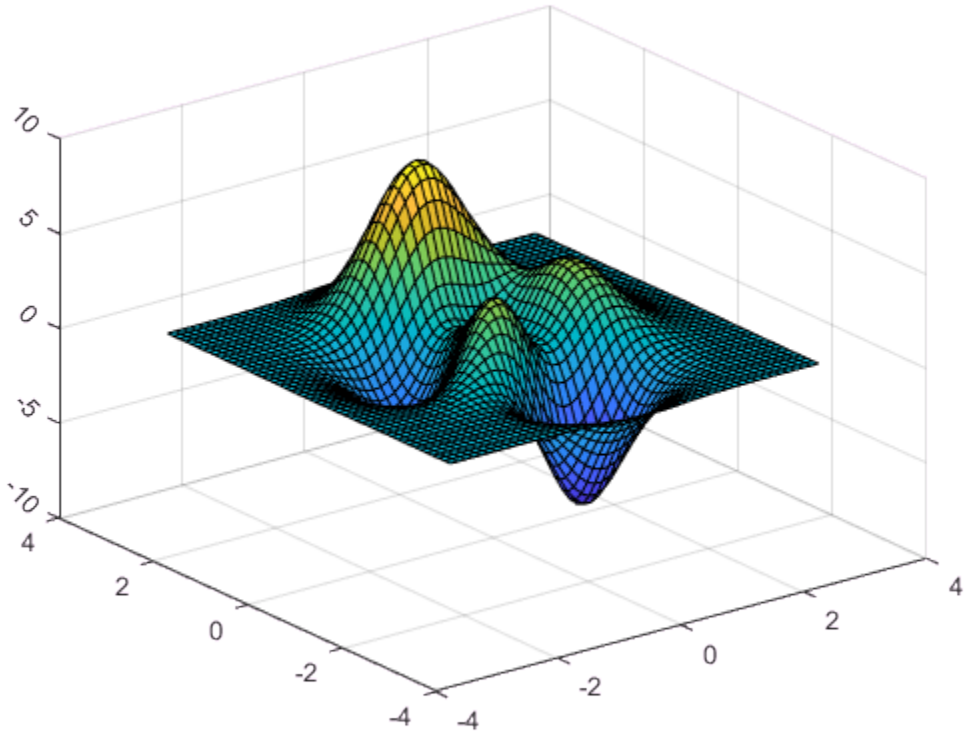

Rotate z-Axis Tick Labels for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Rotate the *z*-axis tick labels for the lower subplot by specifying `ax2` as the first input argument to `ztickangle`.

```
ax1 = subplot(2,1,1);
stem3(2*rand(5))
```

```
ax2 = subplot(2,1,2);
stem3(2*rand(5))
ztickangle(ax2,-45)
```

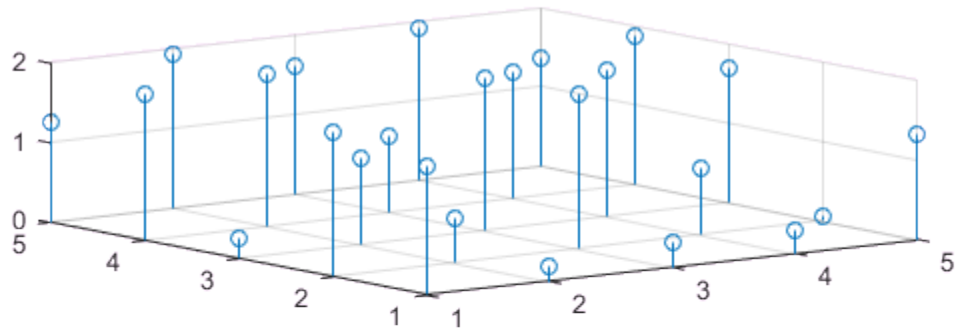

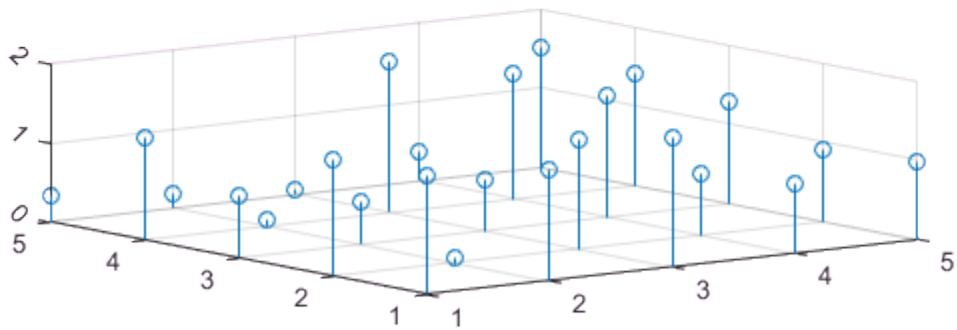

Query Current Angle for z-Axis Tick Labels

Create a surface chart. Then, query the rotation angle for the *z*-axis tick labels. By default, the labels are not rotated.

```
[x,y,z] = peaks;
surf(peaks)
```

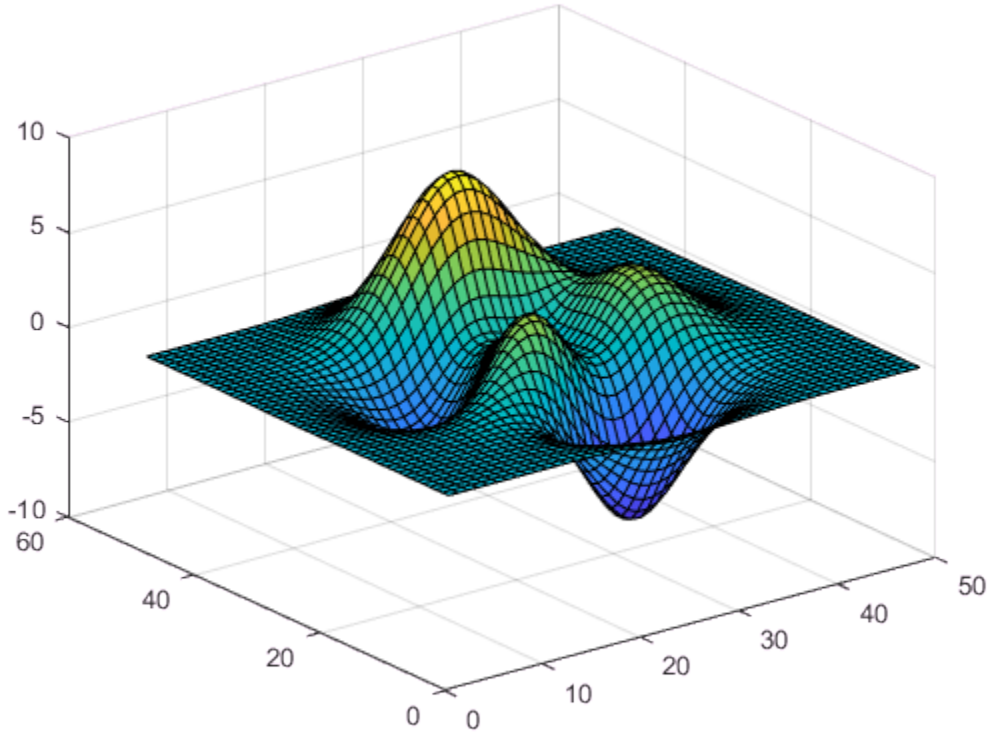


```
ang = ztickangle
```

```
ang = 0
```

Input Arguments

angle — Rotation of tick labels

0 (default) | scalar value in degrees

Rotation of tick labels, specified as a scalar value in degrees, where 0 is horizontal.

Example: `ztickangle(90)`

ax — Target axes
current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `ztickangle` uses the current axes.

Algorithms

The `ztickangle` function sets and queries the ZTickLabelRotation property of the `Axes` object.

See Also

See Also

Functions
`xtickangle` | `ytickangle` | `zlim` | `ztickformat` | `zticklabels` | `zticks`

Properties
Axes Properties

Introduced in R2016b

ztickformat

Specify *z*-axis tick label format

Syntax

```
ztickformat(fmt)
ztickformat(datefmt)
ztickformat(durationfmt)
ztickformat(ax, ___ )

zfmt = ztickformat
zfmt = ztickformat(ax)
```

Description

`ztickformat(fmt)` sets the format for numeric *z*-axis tick labels. For example, specify `fmt` as `'usd'` to display the labels in U.S. dollars.

`ztickformat(datefmt)` sets the format for labels that show dates or times. For example, specify `datefmt` as `'MM-dd-yy'` to display dates such as `04-19-16`. This option applies only to a *z*-axis with datetime values.

`ztickformat(durationfmt)` sets the format for labels that show durations. For example, specify `durationfmt` as `'m'` to display the durations in minutes. This option applies only to a *z*-axis with duration values.

`ztickformat(ax, ___ )` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument.

`zfmt = ztickformat` returns the format style used for *z*-axis tick labels of the current axes. Depending on the type of labels along the *z*-axis, `zfmt` is a character vector of a numeric format, date format, or duration format.

`zfmt = ztickformat(ax)` returns the format style used for the axes specified by `ax` instead of the current axes.

Examples

Display *z*-Axis Tick Labels in Dollars

Create a 3-D stem chart of random data. Display the tick labels along the *z*-axis in US dollars.

```
z = 10*rand(5);
stem3(z)
ztickformat('usd')
```

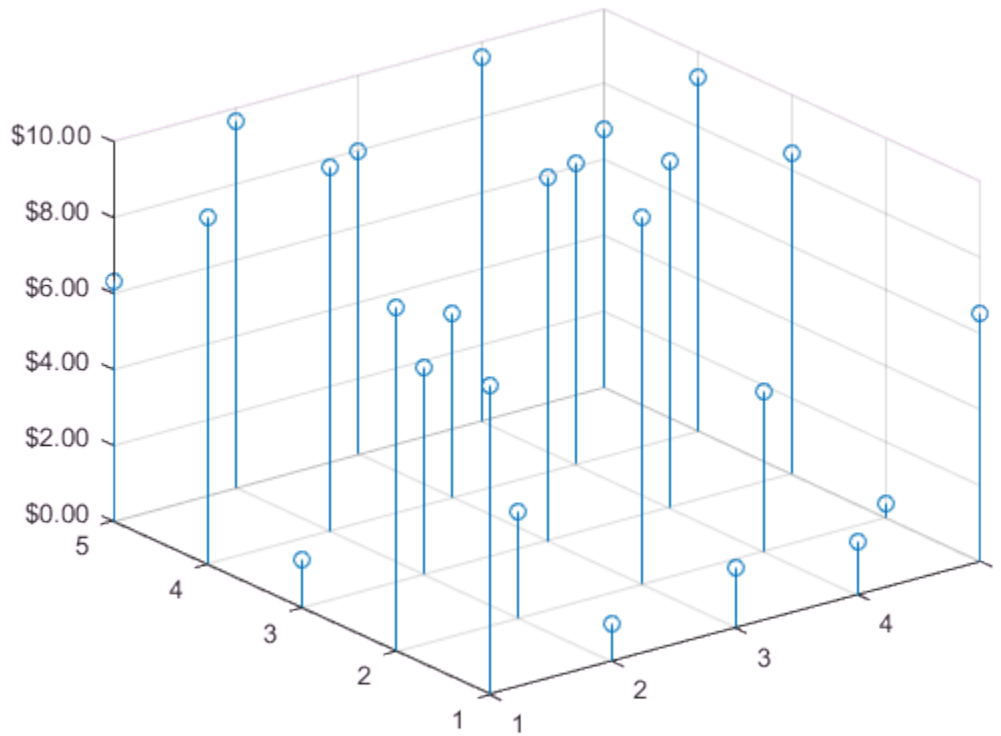

Query the tick label format. MATLAB® returns the format as a character vector containing the formatting operators.

```
fmt = ztickformat
```

```
fmt =
'$%,.2f'
```

Display the tick labels with no decimal values by tweaking the numeric format to use a precision value of 0 instead of 2.

```
ztickformat('$%,.0f')
```

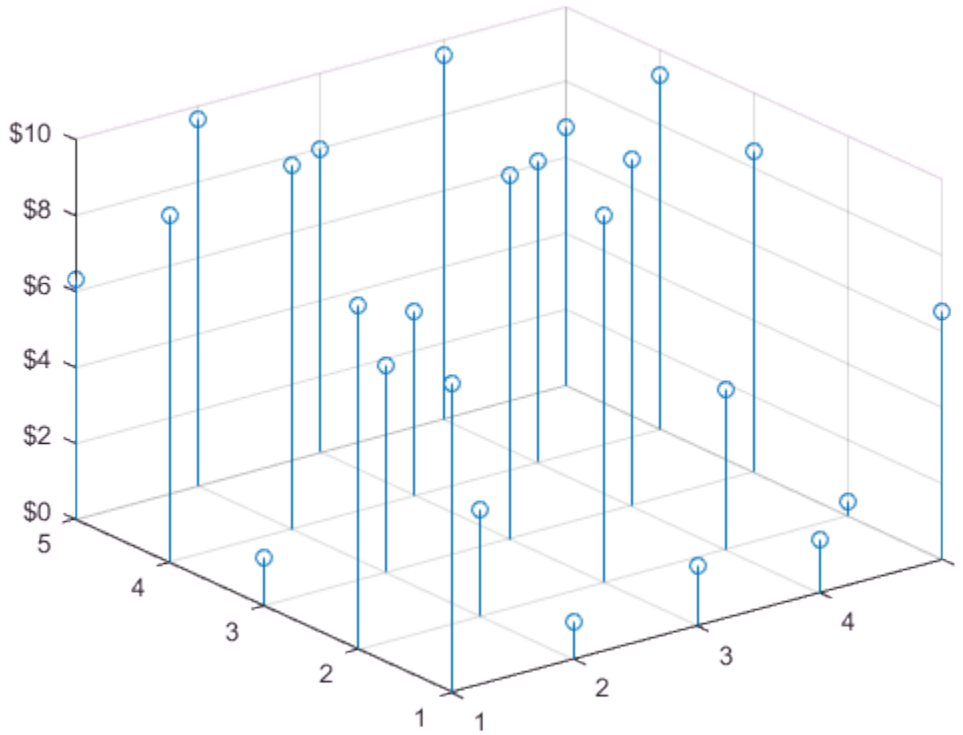

Display Text After Each *z*-Axis Tick Label

Create a 3-D line chart. Display the tick labels along the *z*-axis with the text "cm" after each value.

```
t = 0:pi/10:10*pi;
st = sin(t);
ct = cos(t);
plot3(st,ct,t)
grid on
ztickformat('%g cm')
```

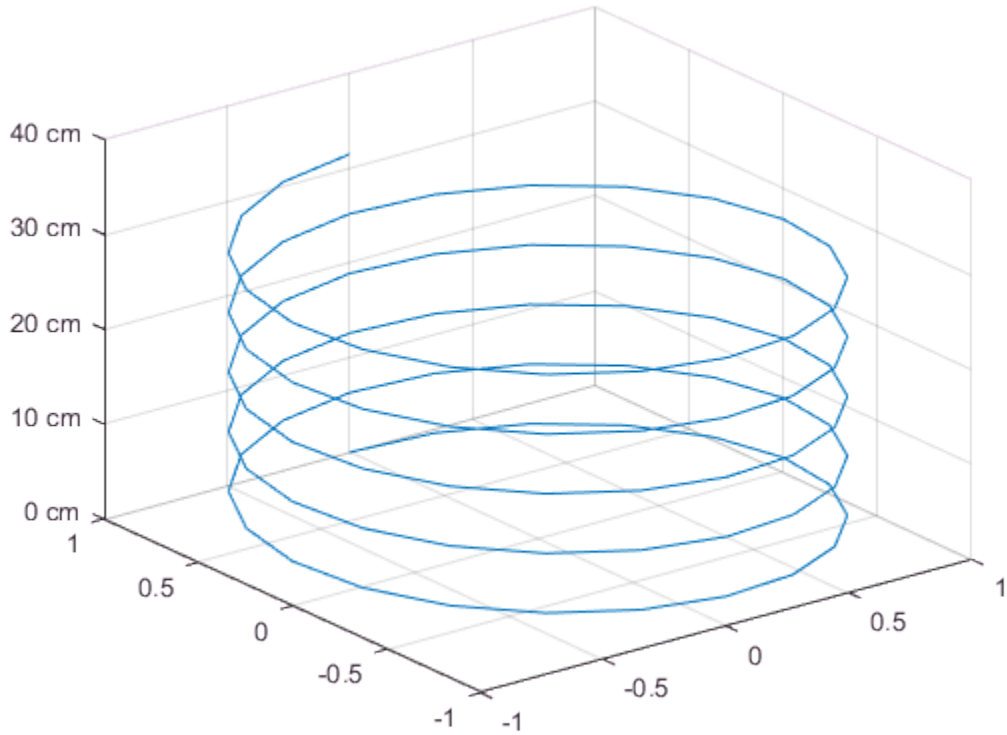

Control Number of Decimal Places for *z*-Axis Tick Labels

Create a 3-D scatter plot of random data. Display the *z*-axis tick labels with two decimal places. Control the decimal places by passing `ztickformat` a character vector of a numeric format that uses fixed-point notation for the conversion character and a precision value of 2.

```
x = rand(50,1);
y = rand(50,1);
z = rand(50,1);
scatter3(x,y,z)
ztickformat('%.2f')
```

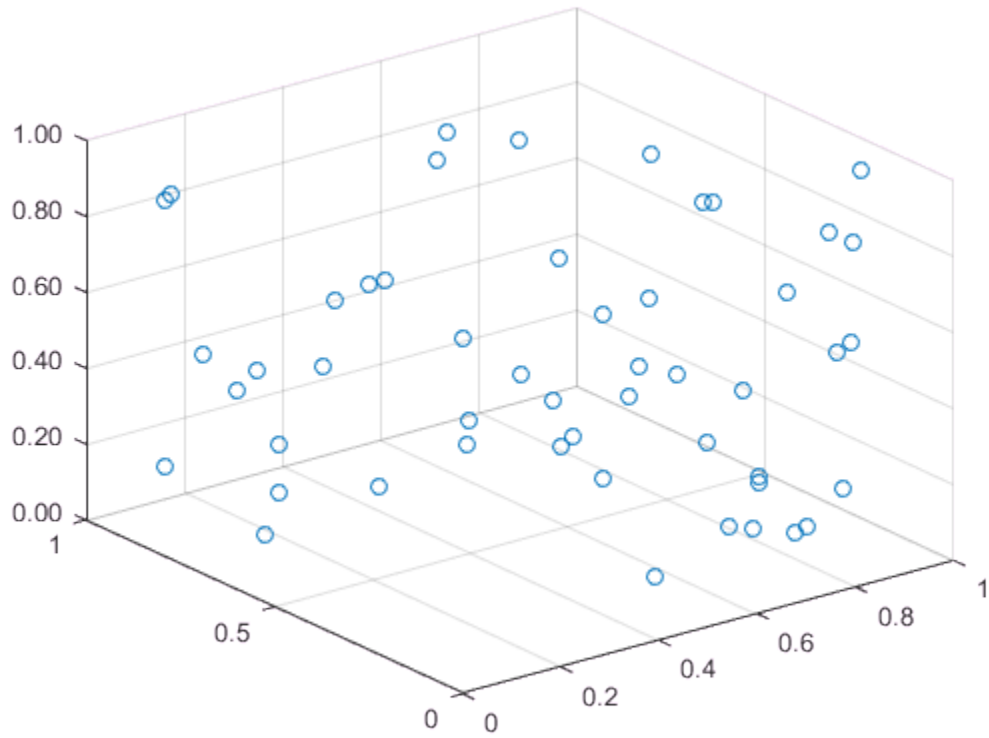

Specify *z*-Axis Tick Label Format for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Specify the *z*-axis tick label format for the left subplot by specifying `ax1` as the first input argument to `ztickformat`. Display the tick labels in US dollars.

```
ax1 = subplot(1,2,1);
stem3(4*rand(5))
```

```
ztickformat(ax1,'usd')

ax2 = subplot(1,2,2);
stem3(4*rand(5))
```

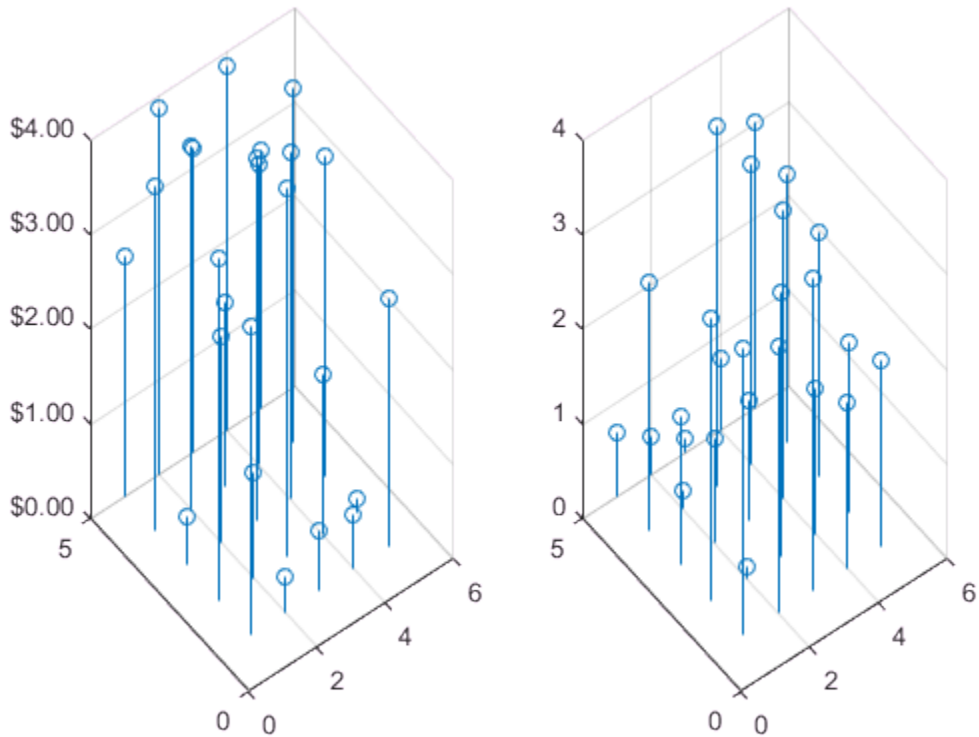

Input Arguments

`fmt` — Format for numeric tick labels

`'%g'` (default) | predefined format | character vector

Format for numeric tick labels, specified as one of the predefined formats listed in this table or a character vector of a custom numeric format.

Predefined Format	Description
`'usd'`	U.S. dollars. This option is equivalent using `'$%,.2f'`. If the labels use scientific notation, this option sets the exponent value to 0.
`'eur'`	Euro. This option is equivalent to using `'\x20AC%,.2f'` with an exponent value of 0.
`'gbp'`	British pound. This option is equivalent to using `'\x00A3%,.2f'` with an exponent value of 0.
`'jpy'`	Japanese yen. This option is equivalent to using `'\x00A5%,d'` with an exponent value of 0.
`'degrees'`	Display degree symbol after values. This option is equivalent to using `'%g\x00B0'` with the default exponent value.
`'percentage'`	Display percent sign after values. This option is equivalent to using `'%g%%'` with the default exponent value.
`'auto'`	Default format of `'%g'` with the default exponent value.

Example: `ztickformat('usd')`

Character Vector of Numeric Format

You can specify a custom numeric format by creating a character vector of identifiers.

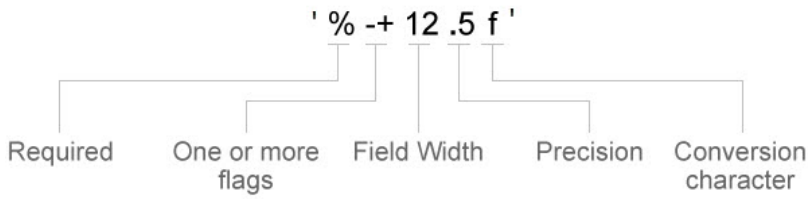

Identifiers are optional, except the percent sign and conversion character. Construct the format in this order:

- One or more flags — Options such as adding a plus sign before positive values. For a full list of options, see the table of Optional Flags.
- Field width — Minimum number of characters to print in the tick label. Specify the field width as an integer value. If the number of significant digits in the tick value is smaller than the field width, then the label is padded with spaces.
- Precision — Number of digits to the right of the decimal point or the number of significant digits, depending on the conversion character. Specify the precision as an integer value.
- Conversion character — Value type. For a full list of options, see the table of Conversion Characters. If you specify a conversion that does not fit the data, then MATLAB overrides the specified conversion, and uses `%e`.

Also, you can specify literal text at the beginning or end of the format. To print a single quotation mark, use `''`. To print a percent character, use `%%`.

Example: `ztickformat('%.2f')` displays the values using fixed-point notation with two decimal places.

Example: `ztickformat('$%.2f')` displays a dollar sign before each value.

Example: `ztickformat('%.2f million')` displays `million` after each value.

Optional Flags

Identifier	Description	Example of Numeric Format
`,`	Display commas every three digits, such as `'1,000'`.	`'%,4.4g'`
`+`	Print the sign character (+) for positive values, such as `'+100'`.	`'%+4.4g'`
`0`	Pad the field width with leading zeros instead of spaces, such as `'0100'`.	`'%04.4g'`
`–`	Left-justify, which pads the end of the value with spaces instead of the beginning.	`'%-4.4g'`

Identifier	Description	Example of Numeric Format
	For example, if the field width is 4, then this flag formats the label as `'100 '` instead of `' 100'`.	
#	For the `%f`, `%e`, and `%g` conversion characters, print the decimal point even when the precision is 0, such as `'100.'`. For `%g`, do not remove trailing zeros.	`'%#4.4g'`

Conversion Characters

Identifier	Description	Example
`d` or `i`	Signed integer with base 10. The precision value indicates the number of significant digits.	`'%.4d'` displays π as `0003`.
`f`	Fixed-point notation. The precision value indicates the number of decimal places.	`'%.4f'` displays π as `3.1416`.
`e`	Exponential notation. The precision value indicates the number of decimal places.	`'%.4e'` displays π as 3.1416×10^0.
`g`	The more compact version of `e` or `f`, with no trailing zeros. The precision value indicates the maximum number of decimal places.	`'%.4g'` displays π as `3.1416`.

`datefmt` — Format for dates and times

character vector | `'auto'`

Format for dates and times, specified as a character vector of a date format or `'auto'` for the default format. The default format is based on the data.

Example: `ztickformat('yyyy-MM-dd')` displays a date and time such as `2016-04-19`.

Example: `ztickformat('eeee, MMMM d, yyyy HH:mm:ss')` displays a date and time such as `Saturday, April 19, 2016 21:41:06`.

Example: `ztickformat('MMMM d, yyyy HH:mm:ss Z')` displays a date and time such as `April 19, 2016 21:41:06 -0400`.

The display format tables show the letter identifiers that you can use to construct the character vector. To separate the fields, you can include nonletter characters such as a hyphen, space, colon, or any non-ASCII characters. The identifiers correspond to the Unicode Locale Data Markup Language (LDML) standard for dates.

Date and Time Formats

Use these identifiers to specify the display formats of the date and time fields.

Letter Identifier	Description	Display
`G`	Era	`CE`
`y`	Year, with no leading zeros. See the Note that follows this table.	`2014`
`yy`	Year, using last two digits. See the Note that follows this table.	`14`
`yyy`, `yyyy` ...	Year, using at least the number of digits specified by the number of instances of `'y'`	For the year 2014, `'yyy'` displays `2014`, while `'yyyyy'` displays `02014`.
`u`, `uu`, ...	ISO year. A single number designating the year. An ISO year value assigns positive values to CE years and negative values to BCE years, with 1 BCE being year 0.	`2014`
`Q`	Quarter, using one digit	`2`
`QQ`	Quarter, using two digits	`02`
`QQQ`	Quarter, abbreviated	`Q2`
`QQQQ`	Quarter, full name	`2nd quarter`
`M`	Month, numerical using one or two digits	`4`
`MM`	Month, numerical using two digits	`04`

Letter Identifier	Description	Display
MMM	Month, abbreviated name	Apr
MMMM	Month, full name	April
MMMMM	Month, capitalized first letter	A
W	Week of the month	1
d	Day of the month, using one or two digits	5
dd	Day of the month using two digits	05
D	Day of the year, using one, two or three digits	95
DD	Day of the year using two digits	95
DDD	Day of the year using three digits	095
e	Day of the week, numerical using one or two digits.	7, where Sunday is the first day of the week.
ee	Day of the week, numerical using two digits	07
eee	Day, abbreviated name	Sat
eeee	Day, full name	Saturday
eeeee	Day, capitalized first letter	S
a	Day period (AM or PM)	PM
h	Hour, 12-hour clock notation using one or two digits	9
hh	Hour, 12-hour clock notation using two digits	09
H	Hour, 24-hour clock notation using one or two digits	21
HH	Hour, 24-hour clock notation using two digits	21
m	Minute, using one or two digits	41
mm	Minute, using two digits	41
s	Second, using one or two digits	6

Letter Identifier	Description	Display
ss	Second, using two digits	06
S, SS, ..., SSSSSSSSS	Fractional second, using the number of digits specified by the number of instances of 'S' (up to 9 digits).	'SSS' truncates 6.12345 seconds to 123.

Some tips and considerations:

- If you read a two-digit year number and specify the format as y or yy, then the pivot year determines the century to which the year belongs.
- Use one or more u characters instead of y characters to represent the year when working with year numbers near zero.
- Datetime values later than 144683 years CE or before 140743 BCE display only the year numbers, regardless of the specified format value.

Time Zone Offset Formats

Use these identifiers to specify the display format of the time zone offset. A time zone offset is the amount of time that a specific date and time is offset from UTC. A time zone offset is different from a time zone in that it comprises rules that determine the offsets for specific times of the year. Include a time zone offset identifier when you want to ensure that the time components are displayed unambiguously.

Letter Identifier	Description	Display
z	Abbreviated name of the time zone offset. If this value is not available, then the time zone offset uses the short UTC format, such as UTC-4.	EDT
Z	ISO 8601 basic format with hours, minutes, and optional seconds fields.	-0400
ZZZZ	Long UTC format.	UTC-04:00
ZZZZZ	ISO 8601 extended format with hours, minutes, and optional	-04:00

Letter Identifier	Description	Display
	seconds fields. A time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	
`x` or `X`	ISO 8601 basic format with hours field and optional minutes field. If you specify `X`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04`
`xx` or `XX`	ISO 8601 basic format with hours and minutes fields. If you specify `XX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-0400`
`xxx` or `XXX`	ISO 8601 extended format with hours and minutes fields. If you specify `XXX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04:00`
`xxxx` or `XXXX`	ISO 8601 basic format with hours, minutes, and optional seconds fields. If you specify `XXXX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-0400`
`xxxxx` or `XXXXX`	ISO 8601 extended format with hours, minutes, and optional seconds fields. If you specify `XXXXX`, a time offset of zero is displayed as the ISO 8601 UTC indicator “Z”.	`-04:00`

`durationfmt` — Format for duration values

character vector

Format for duration values, specified as a character vector of a duration format.

To display a duration as a single number that includes a fractional part (for example, 1.234 hours), specify one of the following formats.

Format	Description
`'y'`	Number of exact, fixed-length years. A fixed-length year is equal to 365.2425 days.
`'d'`	Number of exact, fixed-length days. A fixed-length day is equal to 24 hours.
`'h'`	Number of hours
`'m'`	Number of minutes
`'s'`	Number of seconds

To display a duration in the form of a digital timer, specify one of these formats:

- `'dd:hh:mm:ss'`
- `'hh:mm:ss'`
- `'mm:ss'`
- `'hh:mm'`

In addition, you can display up to nine fractional second digits by appending up to nine `S` characters. For example, `'hh:mm:ss.SSS'` displays the milliseconds of a duration value to three digits.

`ax` — Target axes

current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `ztickformat` uses the current axes.

Algorithms

The `ztickformat` function sets and queries the `TickLabelFormat` property of the ruler object associated with the *z*-axis.

See Also

See Also

Functions

`xtickformat` | `ytickformat` | `zlim` | `ztickangle` | `zticklabels` | `zticks`

Properties

DatetimeRuler Properties | DurationRuler Properties | NumericRuler Properties

Introduced in R2016b

zticklabels

Set or query *z*-axis tick labels

Syntax

```
zticklabels(labels)
zl = zticklabels

zticklabels('auto')
zticklabels('manual')
m = zticklabels('mode')

___ = zticklabels(ax,___)
```

Description

`zticklabels(labels)` sets the *z*-axis tick labels for the current axes. Specify `labels` as a cell array of character vectors; for example, `{'January','February','March'}`. If you specify the labels, then the *z*-axis tick values and tick labels no longer update automatically based on changes to the axes.

`zl = zticklabels` returns the *z*-axis tick labels for the current axes.

`zticklabels('auto')` sets an automatic mode, enabling the axes to determine the *z*-axis tick labels. Use this option if you set the labels and then want to set them back to the default values.

`zticklabels('manual')` sets a manual mode, freezing the *z*-axis tick labels at the current values.

`m = zticklabels('mode')` returns the current value of the *z*-axis tick labels mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify the tick labels or set the mode to manual.

`___ = zticklabels(ax,___)` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes.

Examples

Specify z-Axis Tick Values and Labels

Create a surface plot. Display tick marks along the *z*-axis at the values -8, 0, and 8. Then, specify a label for each tick mark.

```
[x,y,z] = peaks;
surf(x,y,z)
zticks([-8 0 8])
zticklabels({'z = -8','z = 0','z = 8'})
```

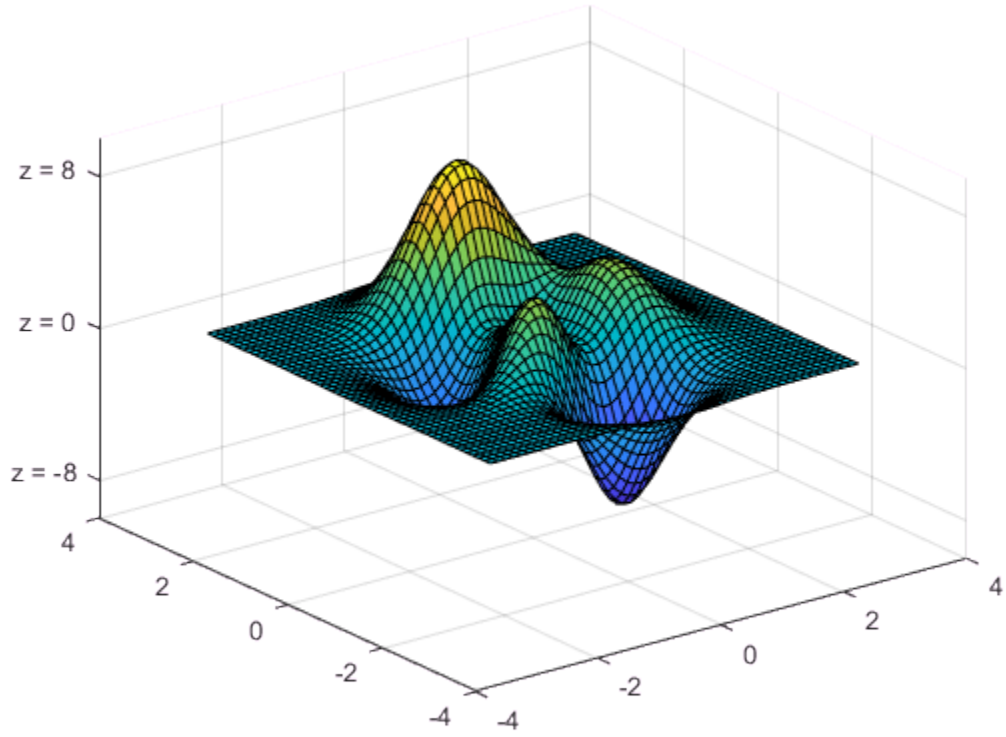

Specify z-Axis Tick Labels for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Set the *z*-axis tick values and labels for the left subplot by passing `ax1` as the first input argument to the `zticks` and `zticklabels` functions.

```
ax1 = subplot(1,2,1);
stem3(4*rand(5))
zticks(ax1,[0 2 4])
zticklabels(ax1,{'z = 0','z = 2','z = 4'})

ax2 = subplot(1,2,2);
stem3(4*rand(5))
```

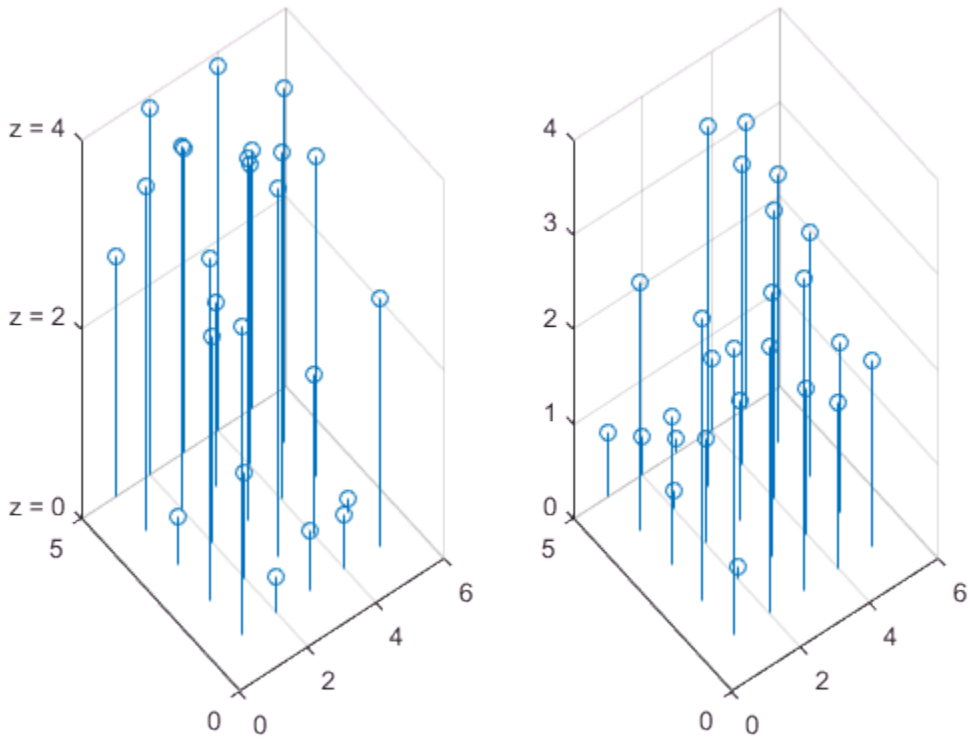

Set z-Axis Tick Labels Back to Default Labels

Create a surface plot and specify the *z*-axis tick values and labels. Then, set the values and labels back to the default values.

```
[x,y,z] = peaks;
mesh(x,y,z)
zticks([-8 0 8])
zticklabels({'z = -8','z = 0','z = 8'})
```

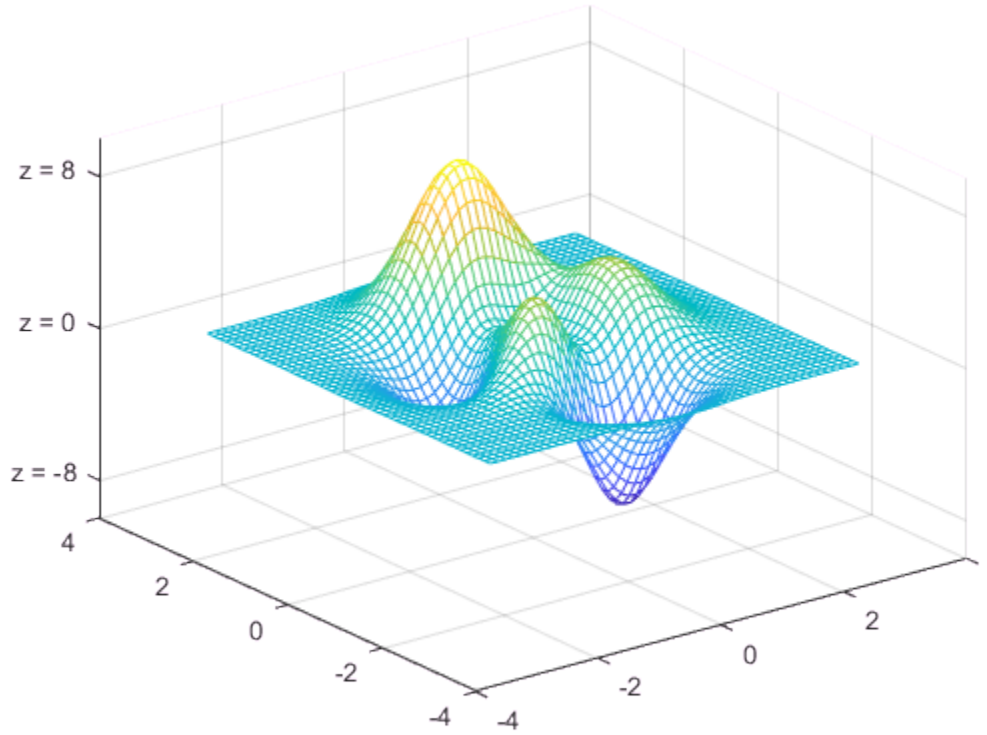


```
zticks('auto')
zticklabels('auto')
```

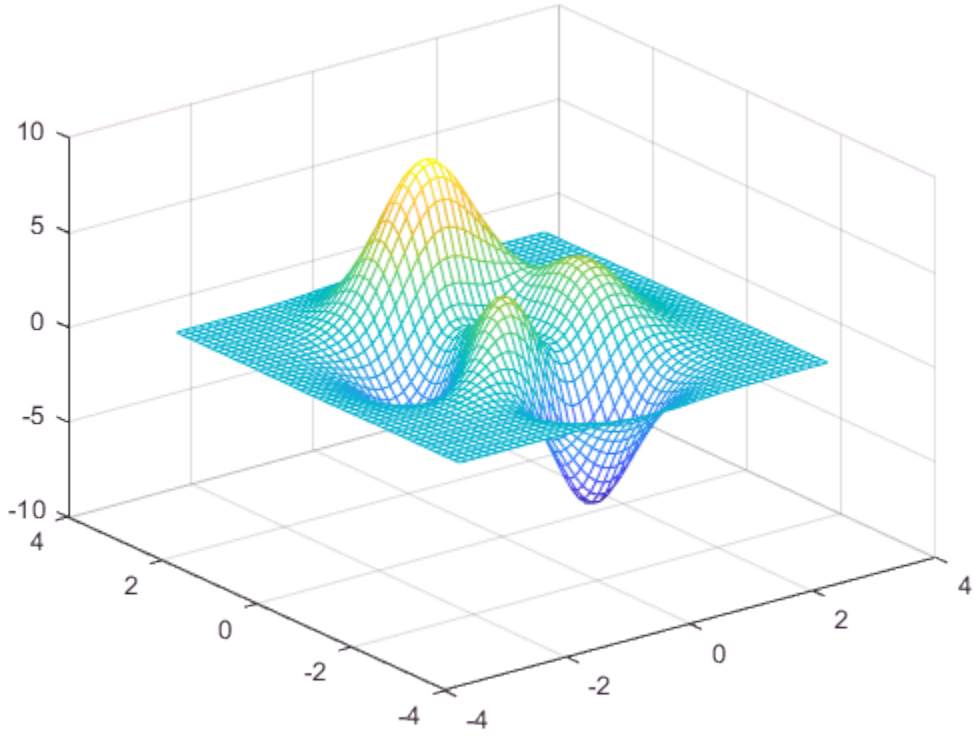

Remove z-Axis Tick Labels

Remove the tick labels along the *z*-axis by specifying the tick labels as an empty array.

```
[x,y,z] = peaks;
surf(x,y,z)
zticklabels({})
```

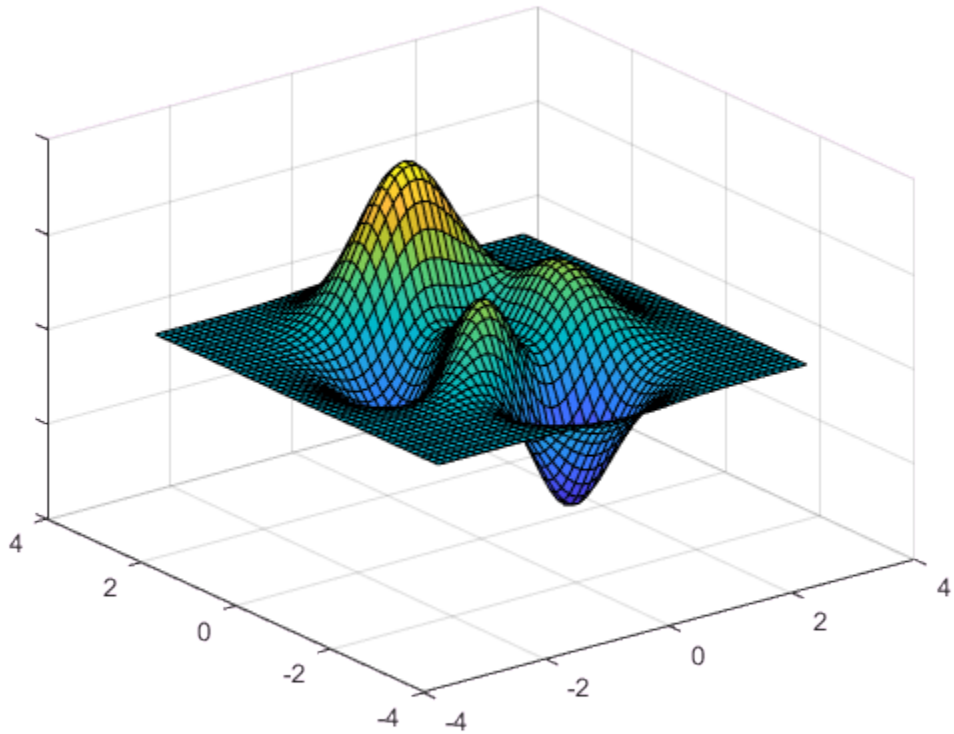

Input Arguments

`labels` — Tick labels

cell array of character vectors

Tick labels, specified as a cell array of character vectors. If you do not want tick labels to show, then specify an empty cell array `{}`. Tick labels support TeX and LaTeX markup. See the TickLabelInterpreter property of the `Axes` object for more information.

Example: `zticklabels({'0','\pi','2\pi'})`

Example: `zticklabels({'January','Febrary','March'})`

Example: `zticklabels({})`

Note: To specify the tick values, use the `zticks` function.

`ax` — Target axes

current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `zticklabels` uses the current axes.

Output Arguments

`zl` — Current tick labels

cell array of character vectors | character matrix

Current tick labels, returned as a cell array of character vectors or a character matrix.

`m` — Current tick labels mode

`'auto'` | `'manual'`

Current tick labels mode, returned as one of these values:

- `'auto'` — Automatically determine the *z*-axis tick labels.
- `'manual'` — Use manually specified *z*-axis tick labels.

Definitions

Tick Labels

The tick labels are the labels that you see next to each tick mark. The tick values are the locations along the *z*-axis where the tick marks appear. Set the tick values using the `zticks` function. Set the corresponding tick labels using the `zticklabels` function.

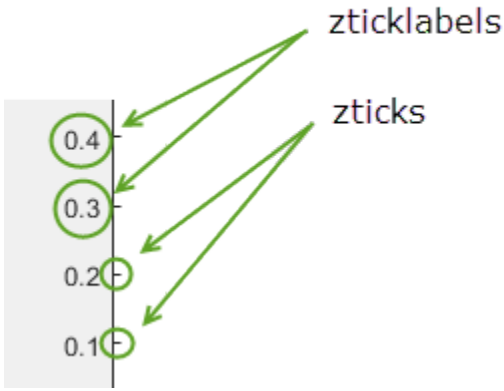

Algorithms

The `zticklabels` function sets and queries several axes properties related to the *z*-axis tick labels.

- ZTickLabel — Property that stores the text for the *z*-axis tick labels.
- ZTickLabelMode — Property that stores the *z*-axis tick label mode. When you set the *z*-axis tick labels using `zticklabels`, this property changes to `'manual'`.
- ZTickMode — Property that stores the *z*-axis tick value mode. When you set the *z*-axis tick labels using `zticklabels`, this property changes to `'manual'`.

See Also

See Also

Functions

`xticklabels` | `yticklabels` | `zlim` | `ztickangle` | `ztickformat` | `zticks`

Properties

Axes Properties

Introduced in R2016b

zticks

Set or query *z*-axis tick values

Syntax

```
zticks(ticks)
zt = zticks

zticks('auto')
zticks('manual')
m = zticks('mode')

___ = zticks(ax,___)
```

Description

`zticks(ticks)` sets the *z*-axis tick values, which are the locations along the *z*-axis where the tick marks appear. Specify `ticks` as a vector of increasing values; for example, `[0 2 4 6]`. This command affects the current axes.

`zt = zticks` returns the current *z*-axis tick values as a vector.

`zticks('auto')` sets an automatic mode, enabling the axes to determine the *z*-axis tick values. Use this option if you change the tick values and then want to set them back to the default values.

`zticks('manual')` sets a manual mode, freezing the *z*-axis tick values at the current values. Use this option if you want to retain the current tick values when resizing the axes or adding new data to the axes.

`m = zticks('mode')` returns the current *z*-axis tick values mode, which is either `'auto'` or `'manual'`. By default, the mode is automatic unless you specify tick values or change the mode to manual.

`___ = zticks(ax,___)` uses the axes specified by `ax` instead of the current axes. Specify `ax` as the first input argument for any of the previous syntaxes.

Examples

Specify z-Axis Tick Values and Labels

Create a surface plot. Display tick marks along the *z*-axis at the values -8, 0, and 8. Then, specify a label for each tick mark.

```
[x,y,z] = peaks;
surf(x,y,z)
zticks([-8 0 8])
zticklabels({'z = -8','z = 0','z = 8'})
```

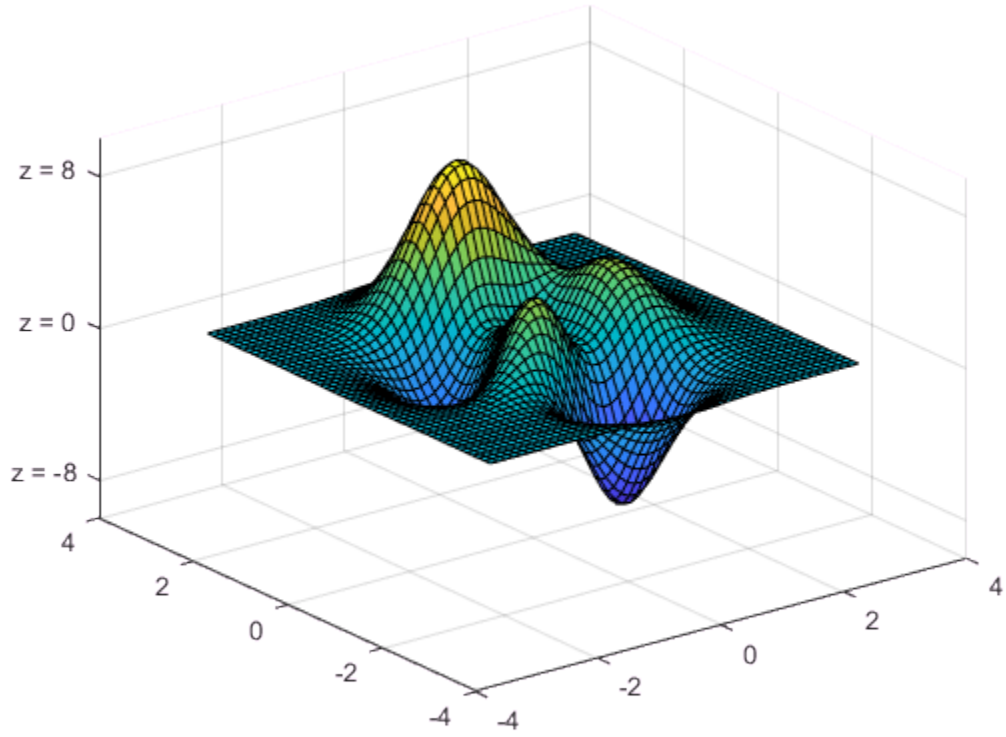

Specify Nonuniform z-Axis Tick Values

Display tick marks along the *z*-axis at nonuniform values between -10 and 10. MATLAB® labels the tick marks with the numeric values.

```
[x,y,z] = peaks;
surf(peaks)
zticks([-10 -2.5 0 2.5 10])
```

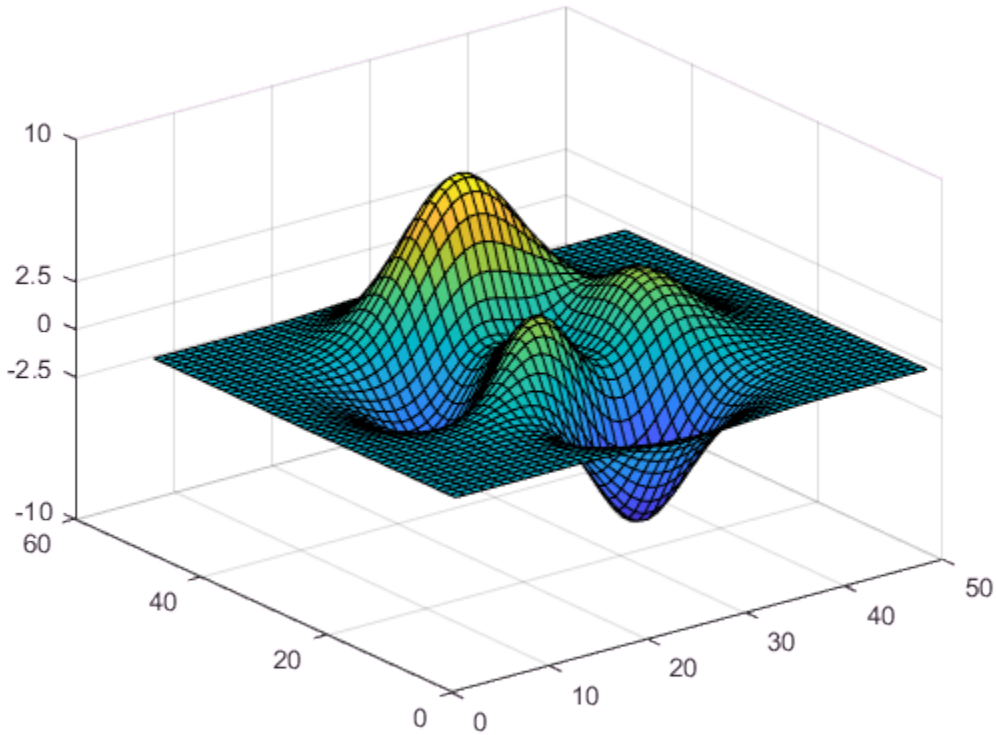

Increment z-Axis Tick Values by 2

Display tick marks along the *z*-axis at increments of 2, starting from -10 and ending at 10.

```
[x,y,z] = peaks;
surf(peaks)
zticks([-10:2:10])
```

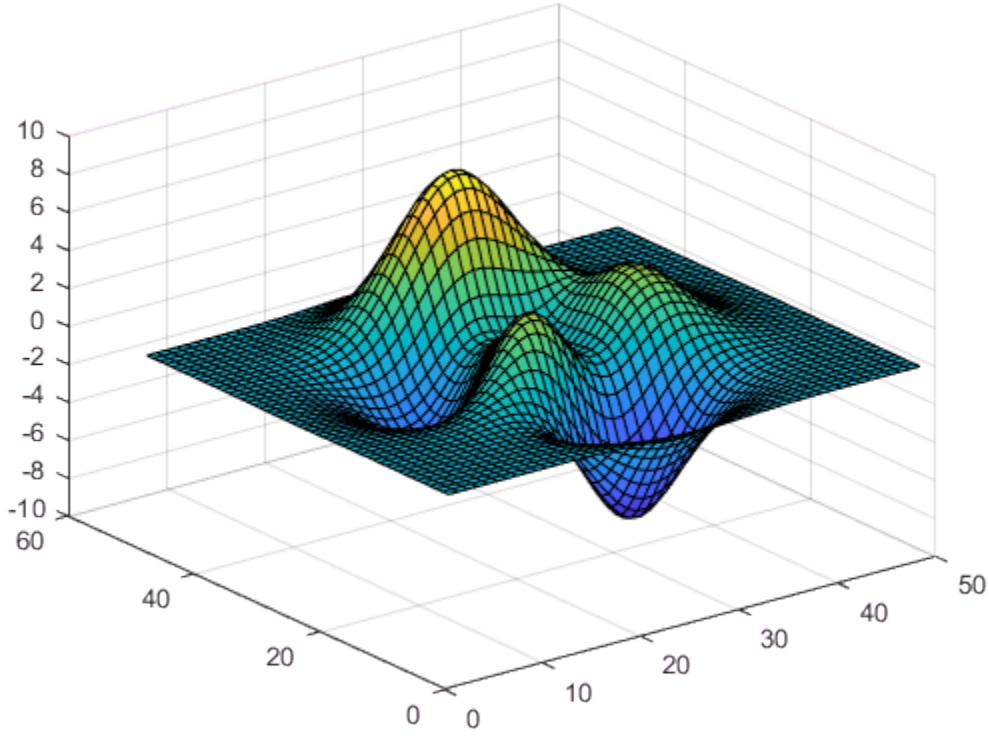

Set z-Axis Tick Values Back to Default Values

Create a plot and specify the *z*-axis tick values. Then, set the *z*-axis tick values back to the default values.

```
t = 0:pi/50:10*pi;
st = sin(t);
```

```
ct = cos(t);
plot3(st,ct,t)
zticks(0:8:40)
```

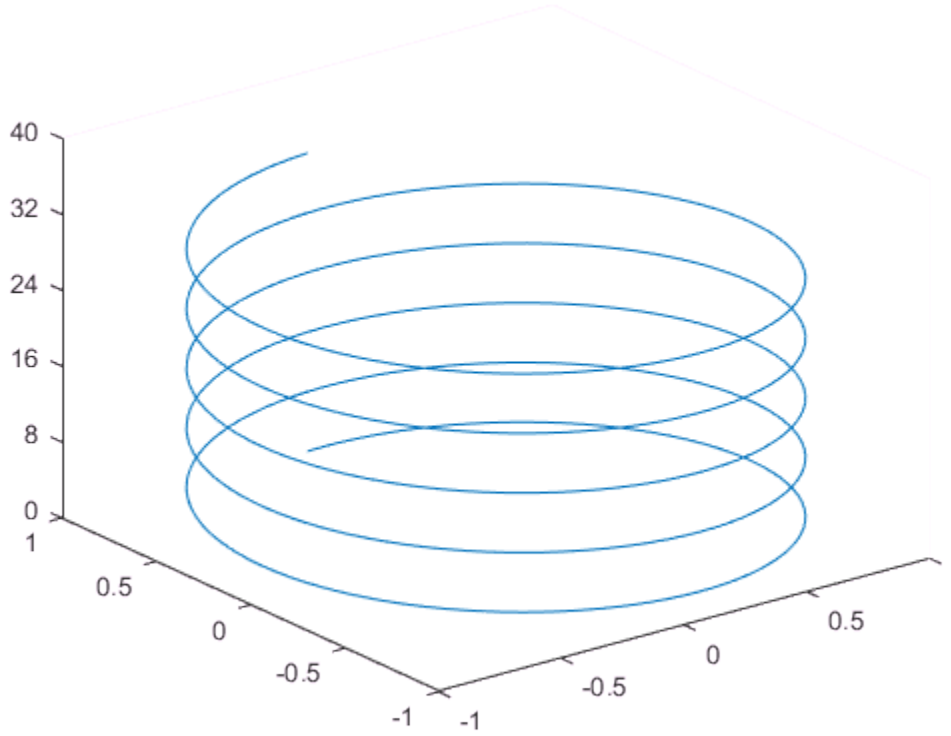


```
zticks('auto')
```

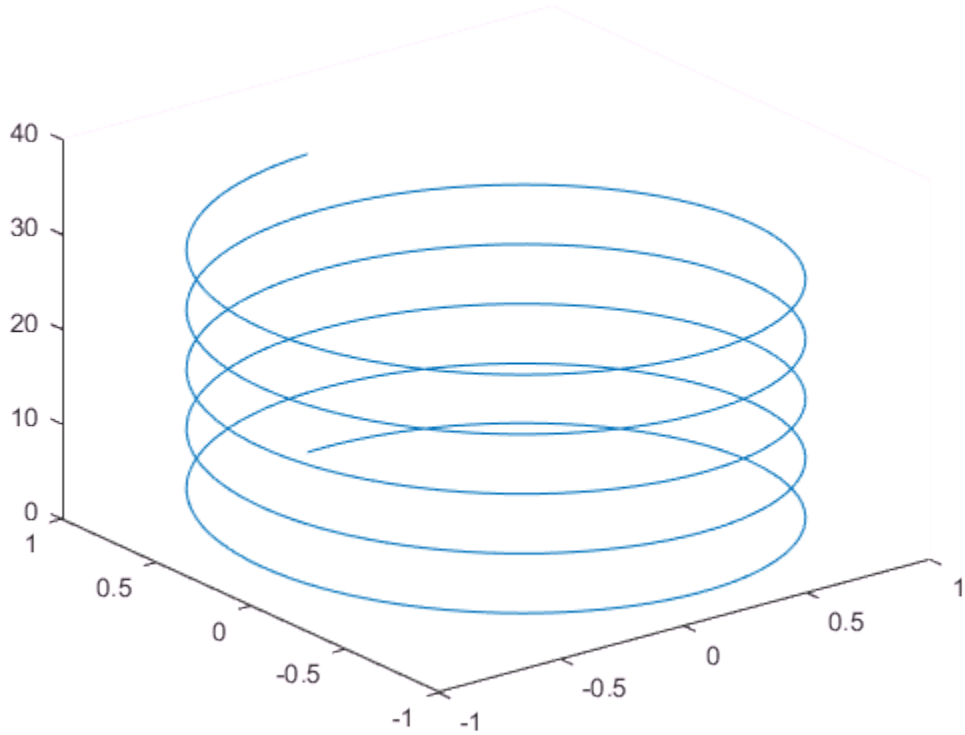

Specify z-Axis Tick Values for Specific Axes

Create a figure with two subplots and return the axes objects as `ax1` and `ax2`. Set the *z*-axis tick values for the left subplot by passing `ax1` as the first input argument to the `zticks` function.

```
ax1 = subplot(1,2,1);
stem3(4*rand(5))
zticks(ax1,[0 1.5 3.25])

ax2 = subplot(1,2,2);
stem3(4*rand(5))
```

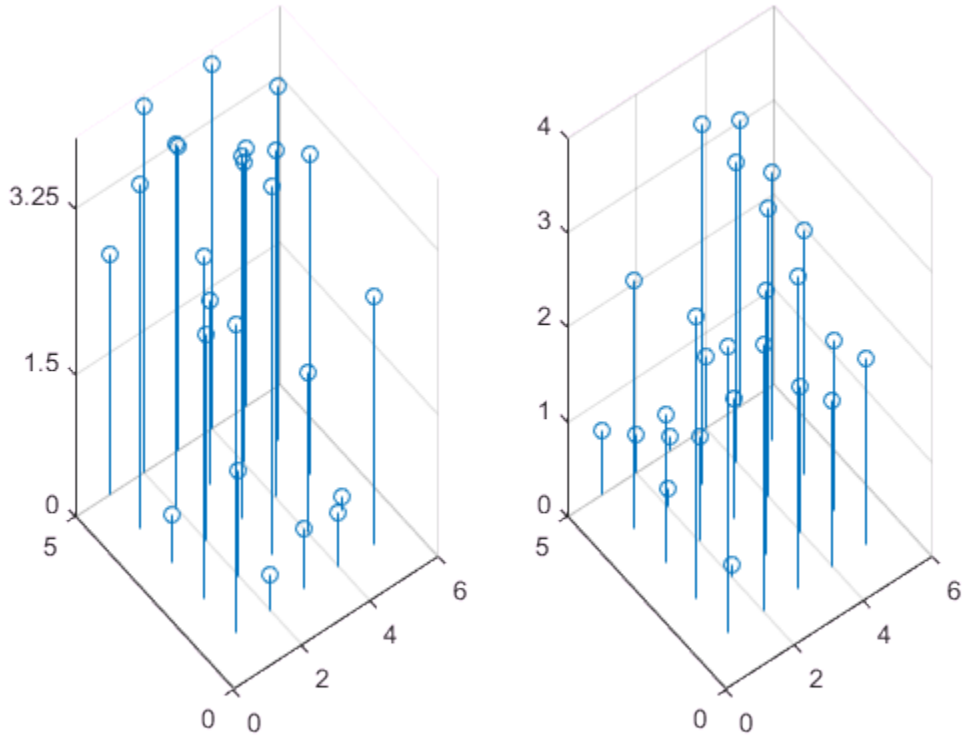

Remove z-Axis Tick Marks

Remove the tick marks along the *z*-axis by specifying the tick values as an empty array. Removing the tick marks also removes any grid lines in the *z* direction.

```
[x,y,z] = peaks;
mesh(x,y,z)
zticks([])
```

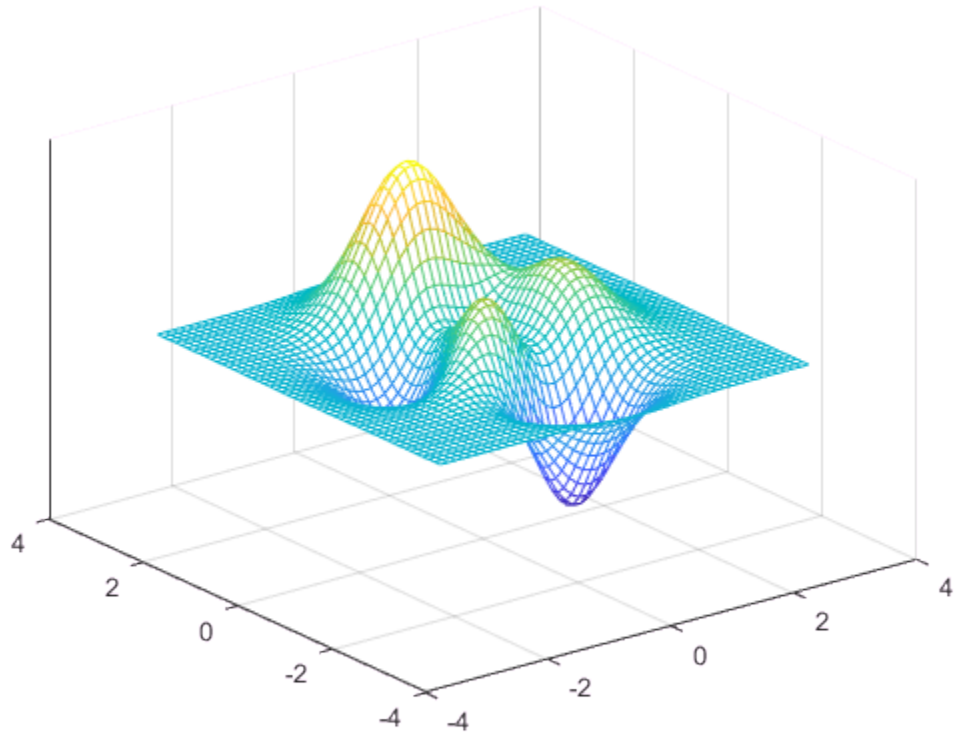

Input Arguments

`ticks` — Tick values

vector of increasing values

Tick values, specified as a vector of increasing values. If you do not want tick marks along the *z*-axis, specify an empty vector `[]`.

You can specify the tick values as numeric, categorical, datetime, or duration values. However, the type of values that you specify must match the type of values along the *z*-axis.

Example: `zticks([pi 2*pi 3*pi 4*pi])`

Example: `zticks(0:10:100)`

Example: `zticks([])`

Note: To specify the tick labels, use the `zticklabels` function.

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `categorical` | `datetime` | `duration`

`ax` — Target axes
current axes (default) | single `Axes` object | vector of `Axes` objects

Target axes, specified as a single `Axes` object or a vector of `Axes` objects. If you do not specify the axes, then `zticks` uses the current axes.

Output Arguments

`zt` — Current tick values
vector

Current tick values, returned as a vector.

`m` — Current mode
`'auto'` | `'manual'`

Current mode, returned as one of these values:

- `'auto'` — Automatically determine the *z*-axis tick values.
- `'manual'` — Use manually specified *z*-axis tick values.

Definitions

Tick Values

The tick values are the locations along the *z*-axis where the tick marks appear. The tick labels are the labels that you see next to each tick mark. Set the tick values using the `zticks` function. Set the corresponding tick labels using the `zticklabels` function.

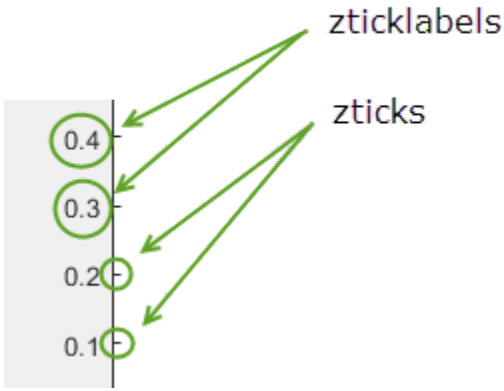

Algorithms

The `zticks` function sets and queries several axes properties related to the *z*-axis tick values.

- ZTick — Property that stores the *z*-axis tick values.
- ZTickMode — Property that stores the *z*-axis tick value mode. When you set the *z*-axis tick values, this property changes to `'manual'`.

See Also

See Also

Functions
`xlim` | `xtickangle` | `xtickformat` | `xticklabels` | `xticks` | `yticks`

Properties
Axes Properties

Introduced in R2016b

xlsfinfo

Determine if file contains Microsoft Excel spreadsheet

Syntax

```
status = xlsfinfo(filename)
[status,sheets] = xlsfinfo(filename)
[status,sheets,xlFormat] = xlsfinfo(filename)
```

Description

`status = xlsfinfo(filename)` indicates if `filename` is a file that the `xlsread` function can read.

`[status,sheets] = xlsfinfo(filename)` additionally returns the name of each spreadsheet in the file.

`[status,sheets,xlFormat] = xlsfinfo(filename)` also returns the format description that Excel returns for the file. On systems without Excel for Windows, `xlFormat` is an empty character vector, `''`.

Examples

View Information About Spreadsheet File

Create a sample Excel® file named `myExample.xlsx`.

```
values = {1, 2, 3 ; 4, 5, 'x' ; 7, 8, 9};
headers = {'First', 'Second', 'Third'};
xlswrite('myExample.xlsx', [headers; values]);
```

Call `xlsfinfo` to get information about the file.

```
[status,sheets,xlFormat] = xlsfinfo('myExample.xlsx')
```

```
status =

Microsoft Excel Spreadsheet


sheets =

    'Sheet1'    'Sheet2'    'Sheet3'


xlFormat =

xlOpenXMLWorkbook
```

`status` contains descriptive text which indicates that the `xlsread` function can read the sample file.

Input Arguments

`filename` — Name of file

character vector | string

Name of file, specified as a character vector or a string.

Example: `'myFile.xlsx'` or `"myFile.xlsx"`

Data Types: `char` | `string`

Output Arguments

`status` — Type of file

character vector

Type of file, returned as a character vector.

- If `filename` is a file that `xlsread` can read, then `status` is descriptive text, such as `'Microsoft Excel Spreadsheet'`.
- If `filename` is not a file that `xlsread` can read, then `status` is empty, `''`.
- If MATLAB cannot find the file, then `xlsfinfo` returns an error.

`sheets` — Worksheet names
1-by-`n` cell array of character vectors

Worksheet names, returned as a `1`-by-`n` cell array of character vectors, where `n` is the number of worksheets in the file. Each cell contains the name of a worksheet. If `xlsread` cannot read a particular worksheet, the corresponding cell contains an error message.

If `xlsfinfo` cannot read the file, then `sheets` contains an error message.

`xlFormat` — File format description returned by Excel
character vector

File format description returned by Excel, returned as a character vector.

On Windows systems with Excel software, `xlFormat` is one of the following.

`'xlOpenXMLWorkbook'`	Spreadsheet in XLSX format (Excel 2007 or later)
`'xlWorkbookNormal'` or `'xlExcel8'`	Spreadsheet in XLS format (compatible with Excel 97-2003)
`'xlCSV'`	File in comma-separated value (CSV) format
`'xlHtml'` or `'xlWebArchive'`	Spreadsheet exported to HTML format

On all other systems, `xlFormat` is an empty character vector, `''`.

Limitations

- `xlsfinfo` supports only 7-bit ASCII characters.

Tips

- If `xlsfinfo` warns that it cannot start an ActiveX server, then the COM server, which is part of the typical Excel installation, is unavailable. In this case, consider reinstalling your Excel software. On systems with Excel for Windows, `xlsfinfo` uses the COM server to obtain information.

See Also

See Also

`xlsread` | `xlswrite`

Introduced before R2006a

xlsread

Read Microsoft Excel spreadsheet file

Syntax

```
num = xlsread(filename)
num = xlsread(filename,sheet)
num = xlsread(filename,xlRange)
num = xlsread(filename,sheet,xlRange)
num = xlsread(filename,sheet,xlRange,'basic')
[num,txt,raw] = xlsread(___)
```

```
___ = xlsread(filename,-1)
```

```
[num,txt,raw,custom] = xlsread(filename,sheet,xlRange,'',processFcn)
```

Description

`num = xlsread(filename)` reads the first worksheet in the Microsoft Excel spreadsheet workbook named `filename` and returns the numeric data in a matrix.

`num = xlsread(filename,sheet)` reads the specified worksheet.

`num = xlsread(filename,xlRange)` reads from the specified range of the first worksheet in the workbook. Use Excel range syntax, such as `'A1:C3'`.

`num = xlsread(filename,sheet,xlRange)` reads from the specified worksheet and range.

`num = xlsread(filename,sheet,xlRange,'basic')` reads data from the spreadsheet in `basic` import mode. If your computer does not have Excel for Windows, `xlsread` automatically operates in `basic` import mode, which supports XLS, XLSX, XLSM, XLTX, and XLTM files.

If you do not specify all the arguments, use empty character vectors, `''` , as placeholders, for example, `num = xlsread(filename,'','','basic')`.

`[num,txt,raw] = xlsread( ___ )` additionally returns the text fields in cell array `txt`, and both numeric and text data in cell array `raw`, using any of the input arguments in the previous syntaxes.

`___ = xlsread(filename,-1)` opens an Excel window to interactively select data. Select the worksheet, drag and drop the mouse over the range you want, and click **OK**. This syntax is supported only on Windows computers with Microsoft Excel software installed.

`[num,txt,raw,custom] = xlsread(filename,sheet,xlRange,'',processFcn)`, where `processFcn` is a function handle, reads from the spreadsheet, calls `processFcn` on the data, and returns the final results as numeric data in array `num`. The `xlsread` function returns the text fields in cell array `txt`, both the numeric and text data in cell array `raw`, and the second output from `processFcn` in array `custom`. The `xlsread` function does not change the data stored in the spreadsheet. This syntax is supported only on Windows computers with Excel software.

Examples

Read Worksheet Into Numeric Matrix

Create an Excel file named `myExample.xlsx`.

```
values = {1, 2, 3 ; 4, 5, 'x' ; 7, 8, 9};
headers = {'First','Second','Third'};
xlswrite('myExample.xlsx',[headers; values]);
```

`Sheet1` of `myExample.xlsx` contains:

First	Second	Third
1	2	3
4	5	x
7	8	9

Read numeric data from the first worksheet.

```
filename = 'myExample.xlsx';
A = xlsread(filename)
```

```
A =
     1     2     3
```

```
     4     5   NaN
     7     8     9
```

Read Range of Cells

Read a specific range of data from the Excel file in the previous example.

```
filename = 'myExample.xlsx';
sheet = 1;
xlRange = 'B2:C3';

subsetA = xlsread(filename,sheet,xlRange)
```

```
subsetA =
     2     3
     5   NaN
```

Read Column

Read the second column from the Excel file in the first example.

```
filename = 'myExample.xlsx';

columnB = xlsread(filename,'B:B')
```

```
columnB =
     2
     5
     8
```

For better performance, include the row numbers in the range, such as `'B1:B3'`.

Request Numeric, Text, and Raw Data

Request the numeric data, text data, and combined data from the Excel file in the first example.

```
[num,txt,raw] = xlsread('myExample.xlsx')
```

```
num =
     1     2     3
     4     5   NaN
     7     8     9

txt =
```

```
    'First'    'Second'    'Third'
    ''         ''          ''
    ''         ''          'x'

raw =
    'First'    'Second'    'Third'
    [    1]    [     2]    [    3]
    [    4]    [     5]    'x'
    [    7]    [     8]    [    9]
```

Execute a Function on a Worksheet

In the Editor, create a function to process data from a worksheet. In this case, set values outside the range `[0.2,0.8]` to `0.2` or `0.8`.

```
function [Data] = setMinMax(Data)

minval = 0.2;
maxval = 0.8;

for k = 1:Data.Count
  v = Data.Value{k};
  if v > maxval
    Data.Value{k} = maxval;
  elseif v < minval
    Data.Value{k} = minval;
  end
end
```

In the Command Window, add random data to `myExample.xlsx`.

```
A = rand(5);
xlswrite('myExample.xlsx',A,'MyData')
```

The worksheet named `MyData` contains values ranging from 0 to 1.

Read the data from the worksheet, and reset any values outside the range `[0.2,0.8]`. Specify the sheet name, but use `''` as placeholders for the `xlRange` and `'basic'` inputs.

```
trim = xlsread('myExample.xlsx','MyData','','',@setMinMax);
```

Request Custom Output

Execute a function on a worksheet and display the custom index output.

In the Editor, modify the function `setMinMax` from the previous example to return the indices of the changed elements (custom output).

```
function [Data,indices] = setMinMax(Data)

minval = 0.2;
maxval = 0.8;
indices = [];

for k = 1:Data.Count
  v = Data.Value{k};
  if v > maxval
    Data.Value{k} = maxval;
    indices = [indices k];
  elseif v < minval
    Data.Value{k} = minval;
    indices = [indices k];
  end
end
```

Read the data from the worksheet `MyData`, and request the custom index output, `idx`.

```
[trim,txt,raw,idx] = xlsread('myExample.xlsx',...
    'MyData','','',@setMinMax);
```

Input Arguments

`filename` — File name

character vector | string

File name, specified as a character vector or a string. If you do not include an extension, `xlsread` searches for a file with the specified name and a supported Excel extension. `xlsread` can read data saved in files that are currently open in Excel for Windows.

Example: `'myFile.xlsx'` or `"myFile.xlsx"`

Data Types: `char` | `string`

`sheet` — Worksheet

character vector | string | positive integer

Worksheet, specified as one of the following:

- Character vector or string that contains the worksheet name. The name cannot contain a colon (`:`). To determine the names of the sheets in a spreadsheet file, use `xlsfinfo`. For XLS files in `basic` mode, `sheet` is case sensitive.
- Positive integer that indicates the worksheet index. This option is not supported for XLS files in `basic` mode.

Data Types: `char` | `string` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`xlRange` — Rectangular range

character vector | string

Rectangular range, specified as a character vector or a string.

Specify `xlRange` using two opposing corners that define the region to read. For example, `'D2:H4'` represents the 3-by-5 rectangular region between the two corners `D2` and `H4` on the worksheet. The `xlRange` input is not case sensitive, and uses Excel A1 reference style (see Excel help).

Range selection is not supported when reading XLS files in `basic` mode. In this case, use `''` in place of `xlRange`.

If you do not specify `sheet`, then `xlRange` must include both corners and a colon character, even for a single cell (such as `'D2:D2'`). Otherwise, `xlsread` interprets the input as a worksheet name (such as `'sales'` or `'D2'`).

If you specify `sheet`, then `xlRange`:

- Does not need to include a colon and opposite corner to describe a single cell.
- Can refer to a named range that you defined in the Excel file (see the Excel help).

When the specified `xlRange` overlaps merged cells:

- On Windows computers with Excel, `xlsread` expands the range to include all merged cells.
- On computers without Excel for Windows, `xlsread` returns data for the specified range only, with empty or `NaN` values for merged cells.

Data Types: `char` | `string`

`'basic'` — Flag to request reading in `basic` mode

character vector | string

Flag to request reading in `basic` mode, specified as the character vector or a string, `'basic'`.

`basic` mode is the default for computers without Excel for Windows. In `basic` mode, `xlsread`:

- Reads XLS, XLSX, XLSM, XLTX, and XLTM files only.
- Does not support an `xlRange` input when reading XLS files. In this case, use `''` in place of `xlRange`.
- Does not support function handle inputs.
- Imports all dates as Excel serial date numbers. Excel serial date numbers use a different reference date than MATLAB date numbers.

Data Types: `char` | `string`

`processFcn` — Handle to a custom function

function handle

Handle to a custom function. This argument is supported only on Windows computers with Excel software. `xlsread` reads from the spreadsheet, executes your function on a copy of the data, and returns the final results. `xlsread` does not change the data stored in the spreadsheet.

When `xlsread` calls the custom function, it passes a range interface from the Excel application to provide access to the data. The custom function must include this interface both as an input and output argument. (See “Execute a Function on a Worksheet” on page 1-12814)

Example: `@myFunction`

Output Arguments

`num` — Numeric data

matrix

Numeric data, returned as a matrix of `double` values. The array does not contain any information from header lines, or from outer rows or columns that contain nonnumeric data. Text data in inner spreadsheet rows and columns appear as `NaN` in the `num` output.

`txt` — Text data
cell array

Text data, returned as a cell array. Numeric values in inner spreadsheet rows and columns appear as empty character vectors, `''`, in `txt`.

For XLS files in `basic` import mode, the `txt` output contains empty character vectors, `''`, in place of leading columns of numeric data that precede text data in the spreadsheet. In all other cases, `txt` does not contain these additional columns.

Undefined values (such as `'#N/A'`) appear in the `txt` output as `'#N/A'`, except for XLS files in `basic` mode.

`raw` — Numeric and text data
cell array

Numeric and text data from the worksheet, returned as a cell array.

On computers with Excel for Windows, undefined values (such as `'#N/A'`) appear in the `raw` output as `'ActiveX VT_ERROR:'`. For XLSX, XLSM, XLTX, and XLTM files on other computers, undefined values appear as `'#N/A'`.

`custom` — Second output of the function corresponding to `processFcn`
defined by the function

Second output of the function corresponding to `processFcn`. The value and data type of `custom` are determined by the function.

Limitations

- `xlsread` reads only 7-bit ASCII characters.
- `xlsread` does not support non-contiguous ranges.
- On Linux platforms, `xlsread` cannot open spreadsheet files written by the `writetable` function.

Algorithms

- `xlsread` imports formatted text representing dates (such as `'10/31/96'`), except in `basic` mode and on computers without Excel for Windows.

See Also

See Also

`importdata` | `readtable` | `uiimport` | `xlsfinfo` | `xlswrite`

Topics

"Import and Export Dates to Excel Files"
"Create Function Handle"

Introduced before R2006a

xlswrite

Write Microsoft Excel spreadsheet file

Syntax

```
xlswrite(filename,A)
xlswrite(filename,A,sheet)
xlswrite(filename,A,xlRange)
xlswrite(filename,A,sheet,xlRange)
```

```
status = xlswrite( ___ )
[status,message] = xlswrite( ___ )
```

Description

`xlswrite(filename,A)` writes matrix `A` to the first worksheet in the Microsoft Excel spreadsheet workbook `filename` starting at cell `A1`.

`xlswrite(filename,A,sheet)` writes to the specified worksheet.

`xlswrite(filename,A,xlRange)` writes to the rectangular region specified by `xlRange` in the first worksheet of the workbook. Use Excel range syntax, such as `'A1:C3'`.

`xlswrite(filename,A,sheet,xlRange)` writes to the specified worksheet and range.

`status = xlswrite( ___ )` returns the status of the write operation, using any of the input arguments in previous syntaxes. When the operation is successful, status is `1`. Otherwise, status is `0`.

`[status,message] = xlswrite( ___ )` additionally returns any warning or error message generated by the write operation in structure `message`.

Examples

Write Vector to Spreadsheet

Write a 7-element vector to an Excel® file.

```
filename = 'testdata.xlsx';
A = [12.7 5.02 -98 63.9 0 -.2 56];
xlswrite(filename,A)
```

Write to Specific Sheet and Range in Spreadsheet

Write mixed text and numeric data to an Excel® file starting at cell `E1` of `Sheet2`.

```
filename = 'testdata.xlsx';
A = {'Time','Temperature'; 12,98; 13,99; 14,97};
sheet = 2;
xlRange = 'E1';
xlswrite(filename,A,sheet,xlRange)
```

Input Arguments

`filename` — File name

character vector | string

File name, specified as a character vector or a string.

If `filename` does not exist, `xlswrite` creates a file, determining the format based on the specified extension. To create a file compatible with Excel 97-2003 software, specify an extension of `.xls`. To create files in Excel 2007 formats, specify an extension of `.xlsx`, `.xlsb`, or `.xlsm`. If you do not specify an extension, `xlswrite` uses the default, `.xls`.

Example: `'myFile.xlsx'` or `"myFile.xlsx"`

Example: `'C:\myFolder\myFile.xlsx'`

Data Types: `char` | `string`

A — Input matrix

matrix

Input matrix, specified as a two-dimensional numeric, character array, or string array , or, if each cell contains a single element, a cell array.

If A is a cell array containing something other than a scalar numeric or text, then `xlswrite` silently leaves the corresponding cell in the spreadsheet empty.

The maximum size of array A depends on the associated Excel version. For more information on Excel specifications and limits, see the Excel help.

Example: `[10,2,45;-32,478,50]`

Example: `{92.0,'Yes',45.9,'No'}`

Example: `"ABCDEF"`

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char` | `string` | `cell`

`sheet` — Worksheet name

character vector | string | positive integer

Worksheet name, specified as one of the following:

- Character vector or string that contains the worksheet name. The name cannot contain a colon (`:`). To determine the names of the sheets in a spreadsheet file, use `xlsfinfo`.
- Positive integer that indicates the worksheet index.

If `sheet` does not exist, `xlswrite` adds a new sheet at the end of the worksheet collection. If `sheet` is an index larger than the number of worksheets, `xlswrite` appends empty sheets until the number of worksheets in the workbook equals `sheet`. In either case, `xlswrite` generates a warning indicating that it has added a new worksheet.

Data Types: `char` | `string` | `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`xlRange` — Rectangular range

character vector | string

Rectangular range, specified as a character vector or a string.

Specify `xlRange` using two opposing corners that define the region to write. For example, `'D2:H4'` represents the 3-by-5 rectangular region between the two corners `D2` and `H4` on the worksheet. The `xlRange` input is not case sensitive, and uses Excel A1 reference style (see Excel help). `xlswrite` does not recognize named ranges.

- If you do not specify `sheet`, then `xlRange` must include both corners and a colon character, even for a single cell (such as `'D2:D2'`). Otherwise, `xlswrite` interprets the input as a worksheet name (such as `'D2'`).
- If you specify `sheet`, then `xlRange` can specify only the first cell (such as `'D2'`). `xlswrite` writes input array `A` beginning at this cell.

- If `xlRange` is larger than the size of input array `A`, Excel software fills the remainder of the region with `#N/A`. If `xlRange` is smaller than the size of `A`, then `xlswrite` writes only the subset that fits into `xlRange` to the file.

Data Types: `char` | `string`

Output Arguments

`status` — Status of the write operation

`1` | `0`

Status of the write operation, returned as either `1` (`true`) or `0` (`false`). When the write operation is successful, `status` is `1`. Otherwise, `status` is `0`.

`message` — Error or warning generated during the write operation

structure array

Error or warning generated during the write operation, returned as a structure array containing two fields:

`message`	Text of the warning or error message.
`identifier`	Message identifier.

Limitations

- If your computer does not have Excel for Windows, or if the COM server (part of the typical installation of Excel) is unavailable, then the `xlswrite` function:
  - Writes array `A` to a text file in comma-separated value (CSV) format. `A` must be a numeric matrix.
  - Ignores the `sheet` and `xlRange` arguments.

Tips

- If your computer has Microsoft Office 2003 software, but you want to create a file in an Excel 2007 format, install the Office 2007 Compatibility Pack.

- Excel and MATLAB can store dates as text that represents those dates (such as `'10/31/96'`) or serial date numbers (such as `729329`). If your array includes serial date numbers, convert these dates to their text representation using `datestr` before calling `xlswrite`. Alternatively, see "Import and Export Dates to Excel Files".
- To write data to Excel files with custom formats (such as fonts or colors), access the Windows COM server directly using `actxserver` rather than `xlswrite`. For example, this MathWorks Support Answer uses `actxserver` to establish a connection between MATLAB and Excel, writes data to a worksheet, and specifies the colors of the cells.

Algorithms

Excel converts `Inf` values to `65535`. MATLAB converts `NaN` values to empty cells.

See Also

See Also

`writetable` | `xlsfinfo` | `xlsread`

Introduced before R2006a

xmlread

Read XML document and return Document Object Model node

Syntax

```
DOMnode = xmlread(filename)
```

Description

`DOMnode = xmlread(filename)` reads the specified XML file and returns a Document Object Model node representing the document.

Input Arguments

`filename`

Character vector that specifies the name of the local file or URL.

Output Arguments

`DOMnode`

Document Object Model node, as defined by the World Wide Web consortium. For more information, see "What Is an XML Document Object Model (DOM)?".

Examples

The root element in an XML file sometimes includes an `xsi:noNamespaceSchemaLocation` attribute. The value of this attribute is the name of the preferred schema file. Call the `getAttribute` method to get this value:

```
xDoc = xmlread(fullfile(matlabroot,'toolbox',...
               'matlab','general','info.xml'));
```

```
xRoot = xDoc.getDocumentElement;
schema = char(xRoot.getAttribute('xsi:noNamespaceSchemaLocation'))
```

This code returns:

```
schema =
http://www.mathworks.com/namespace/info/v1/info.xsd
```

Create functions that parse data from an XML file into a MATLAB structure array with fields `Name`, `Attributes`, `Data`, and `Children`:

```
function theStruct = parseXML(filename)
% PARSEXML Convert XML file to a MATLAB structure.
try
   tree = xmlread(filename);
catch
   error('Failed to read XML file %s.',filename);
end

% Recurse over child nodes. This could run into problems
% with very deeply nested trees.
try
   theStruct = parseChildNodes(tree);
catch
   error('Unable to parse XML file %s.',filename);
end


% ----- Local function PARSECHILDNODES -----
function children = parseChildNodes(theNode)
% Recurse over node children.
children = [];
if theNode.hasChildNodes
   childNodes = theNode.getChildNodes;
   numChildNodes = childNodes.getLength;
   allocCell = cell(1, numChildNodes);

   children = struct(             ...
      'Name', allocCell, 'Attributes', allocCell,    ...
      'Data', allocCell, 'Children', allocCell);

    for count = 1:numChildNodes
        theChild = childNodes.item(count-1);
        children(count) = makeStructFromNode(theChild);
    end
```

```
end

% ----- Local function MAKESTRUCTFROMNODE -----
function nodeStruct = makeStructFromNode(theNode)
% Create structure of node info.

nodeStruct = struct(                        ...
   'Name', char(theNode.getNodeName),       ...
   'Attributes', parseAttributes(theNode),  ...
   'Data', '',                              ...
   'Children', parseChildNodes(theNode));

if any(strcmp(methods(theNode), 'getData'))
   nodeStruct.Data = char(theNode.getData);
else
   nodeStruct.Data = '';
end

% ----- Local function PARSEATTRIBUTES -----
function attributes = parseAttributes(theNode)
% Create attributes structure.

attributes = [];
if theNode.hasAttributes
   theAttributes = theNode.getAttributes;
   numAttributes = theAttributes.getLength;
   allocCell = cell(1, numAttributes);
   attributes = struct('Name', allocCell, 'Value', ...
                       allocCell);

   for count = 1:numAttributes
      attrib = theAttributes.item(count-1);
      attributes(count).Name = char(attrib.getName);
      attributes(count).Value = char(attrib.getValue);
   end
end
```

Tips

The display for a properly parsed document is `[#document: null]`. For example,

```
xDoc = xmlread('info.xml')
```

returns

```
xDoc =
[#document: null]
```

See Also

`xmlwrite` | `xslt`

Topics

"What Is an XML Document Object Model (DOM)?"
"Example — Finding Text in an XML File"

External Websites

DOM Package Summary (methods and properties for nodes)

Introduced before R2006a

xmlwrite

Write XML Document Object Model node

Syntax

```
xmlwrite(filename,DOMnode)
chr = xmlwrite(DOMnode)
```

Description

`xmlwrite(filename,DOMnode)` writes the Document Object Model (DOM) node `DOMnode` to the file `filename`.

`chr = xmlwrite(DOMnode)` returns a serialized DOM node as a character vector.

Input Arguments

`filename`

Character vector that specifies the name of a local file or a URL.

`DOMnode`

Document Object Model node, as defined by the World Wide Web consortium. For more information, see "What Is an XML Document Object Model (DOM)?"

Output Arguments

`chr`

Character vector that contains the serialized DOM node as it appears in an XML file.

Examples

Create and view an XML document:

```
docNode = com.mathworks.xml.XMLUtils.createDocument...
    ('root_element')
docRootNode = docNode.getDocumentElement;
docRootNode.setAttribute('attr_name','attr_value');
for i=1:20
    thisElement = docNode.createElement('child_node');
    thisElement.appendChild...
        (docNode.createTextNode(sprintf('%i',i)));
    docRootNode.appendChild(thisElement);
end
docNode.appendChild(docNode.createComment('this is a comment'));

xmlFileName = [tempname,'.xml'];
xmlwrite(xmlFileName,docNode);
type(xmlFileName);
```

See Also

`xmlread` | `xslt`

Topics

"What Is an XML Document Object Model (DOM)?"
"Creating an XML File"

External Websites

DOM Package Summary (methods and properties for nodes)

Introduced before R2006a

xor

Find logical exclusive-OR

Syntax

```
C = xor(A,B)
```

Description

`C = xor(A,B)` performs a logical exclusive-OR of arrays `A` and `B` and returns an array containing elements set to either logical 1 (`true`) or logical 0 (`false`). An element of the output array is set to logical 1 (`true`) if `A` or `B`, but not both, contains a nonzero element at that same array location. Otherwise, the array element is set to 0.

Examples

Exclusive-OR Truth Table

Create a truth table for `xor`.

```
A = [true false]
```

```
A = 1×2 logical array
   1   0
```

```
B = [true; false]
```

```
B = 2×1 logical array
   1
   0
```

```
C = xor(A,B)
```

```
C = 2×2 logical array
   0   1
   1   0
```

Input Arguments

A, B — Input arrays
scalars | vectors | matrices | multidimensional arrays

Input arrays, specified as scalars, vectors, matrices, or multidimensional arrays. Inputs A and B must either be the same size or have sizes that are compatible (for example, A is an M-by-N matrix and B is a scalar or 1-by-N row vector). For more information, see "Compatible Array Sizes for Basic Operations".

Data Types: `single` | `double` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64` | `logical` | `char`

Extended Capabilities

Tall Arrays
Calculate with arrays that have more rows than fit in memory.

Tall Arrays

This function fully supports tall arrays. For more information, see "Tall Arrays".

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

See Also

See Also
`all` | `and` | `any` | `find` | `Logical Operators: Short Circuit` | `not` | `or`

Topics

"Truth Table for Logical Operations"

Introduced before R2006a

xslt

Transform XML document using XSLT engine

Syntax

```
result = xslt(source, style, dest)
[result,style] = xslt( ___ )
xslt( ___ ,'-web')
```

Description

`result = xslt(source, style, dest)` transforms an XML document using a stylesheet and returns the resulting document's URL. The function uses these inputs, the first of which is required:

- `source` is the filename or URL of the source XML file. `source` can also specify a DOM node.
- `style` is the filename or URL of an XSL stylesheet.
- `dest` is the filename or URL of the desired output document. If `dest` is absent or empty, the function uses a temporary filename. If `dest` is `'-tostring'`, the function returns the output document as a character vector.

`[result,style] = xslt( ___ )` returns a processed stylesheet appropriate for passing to subsequent XSLT calls as `style`. This prevents costly repeated processing of the stylesheet.

`xslt( ___ ,'-web')` displays the resulting document in the Help Browser.

Examples

This example converts the file `info.xml` using the stylesheet `info.xsl`, writing the output to the file `info.html`. It launches the resulting HTML file in the MATLAB Web Browser.

```
xslt('info.xml', 'info.xsl', 'info.html', '-web')
```

Tips

MATLAB uses the Saxon XSLT processor, version 6.5.5, which supports XSLT 1.0 expressions. For more information, see http://saxon.sourceforge.net/saxon6.5.5/

For additional information on writing XSL stylesheets, see the World Wide Web Consortium (W3C®) web site, http://www.w3.org/Style/XSL/.

See Also

`xmlread` | `xmlwrite`

Introduced before R2006a

zeros

Create array of all zeros

Syntax

```
X = zeros
X = zeros(n)
X = zeros(sz1,...,szN)
X = zeros(sz)

X = zeros( ___ ,typename)
X = zeros( ___ ,'like',p)
```

Description

`X = zeros` returns the scalar `0`.

`X = zeros(n)` returns an `n`-by-`n` matrix of zeros.

`X = zeros(sz1,...,szN)` returns an `sz1`-by-...-by-`szN` array of zeros where `sz1,...,szN` indicate the size of each dimension. For example, `zeros(2,3)` returns a 2-by-3 matrix.

`X = zeros(sz)` returns an array of zeros where size vector `sz` defines `size(X)`. For example, `zeros([2 3])` returns a 2-by-3 matrix.

`X = zeros( ___ ,typename)` returns an array of zeros of data type `typename`. For example, `zeros('int8')` returns a scalar, 8-bit integer `0`. You can use any of the input arguments in the previous syntaxes.

`X = zeros( ___ ,'like',p)` returns an array of zeros like `p`; that is, of the same data type (class), sparsity, and complexity (real or complex) as `p`. You can specify `typename` or `'like'`, but not both.

Examples

Matrix of Zeros

Create a 4-by-4 matrix of zeros.

```
X = zeros(4)
```

```
X =

     0     0     0     0
     0     0     0     0
     0     0     0     0
     0     0     0     0
```

3-D Array of Zeros

Create a 2-by-3-by-4 array of zeros.

```
X = zeros(2,3,4);
size(X)
```

```
ans =

     2     3     4
```

Clone Size from Existing Array

Create an array of zeros that is the same size as an existing array.

```
A = [1 4; 2 5; 3 6];
sz = size(A);
X = zeros(sz)
```

```
X =

     0     0
     0     0
     0     0
```

It is a common pattern to combine the previous two lines of code into a single line:

```
X = zeros(size(A));
```

Specify Data Type of Zeros

Create a 1-by-3 vector of zeros whose elements are 32-bit unsigned integers.

```
X = zeros(1,3,'uint32')
```

```
X = 1×3 uint32 row vector

   0   0   0
```

```
class(X)
```

```
ans =
'uint32'
```

Clone Complexity from Existing Array

Create a scalar `0` that is complex like an existing array instead of real valued.

First, create a complex vector.

```
p = [1+2i 3i];
```

Create a scalar `0` that is complex like `p`.

```
X = zeros('like',p)
```

```
X =
   0.0000 + 0.0000i
```

Clone Sparsity from Existing Array

Create a 10-by-10 sparse matrix.

```
p = sparse(10,10,pi);
```

Create a 2-by-3 matrix of zeros that is sparse like `p`.

```
X = zeros(2,3,'like',p)
```

```
X =
   All zero sparse: 2×3
```

Clone Size and Data Type from Existing Array

Create a 2-by-3 array of 8-bit unsigned integers.

```
p = uint8([1 3 5; 2 4 6]);
```

Create an array of zeros that is the same size and data type as p.

```
X = zeros(size(p),'like',p)
```

```
X = 2×3 uint8 matrix

   0   0   0
   0   0   0
```

```
class(X)
```

```
ans =
'uint8'
```

Clone Distributed Array

If you have Parallel Computing Toolbox™, create a 1000-by-1000 distributed array of zeros with underlying data type `int8`. For the `distributed` data type, the `'like'` syntax clones the underlying data type in addition to the primary data type.

```
p = zeros(1000,'int8','distributed');
```

Create an array of zeros that is the same size, primary data type, and underlying data type as p.

```
X = zeros(size(p),'like',p);
```

```
class(X)
```

```
ans =

distributed
```

```
classUnderlying(X)
```

```
ans =

int8
```

Input Arguments

n — Size of square matrix

integer value

Size of square matrix, specified as an integer value.

- If `n` is `0`, then `X` is an empty matrix.
- If `n` is negative, then it is treated as `0`.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

sz1,...,szN — Size of each dimension (as separate arguments)

integer values

Size of each dimension, specified as separate arguments of integer values.

- If the size of any dimension is `0`, then `X` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- Beyond the second dimension, `zeros` ignores trailing dimensions with a size of `1`. For example, `zeros([3,1,1,1])` produces a 3-by-1 vector of zeros.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

sz — Size of each dimension (as a row vector)

integer values

Size of each dimension, specified as a row vector of integer values. Each element of this vector indicates the size of the corresponding dimension:

- If the size of any dimension is `0`, then `X` is an empty array.
- If the size of any dimension is negative, then it is treated as `0`.
- Beyond the second dimension, `zeros` ignores trailing dimensions with a size of `1`. For example, `zeros([3,1,1,1])` produces a 3-by-1 vector of zeros.

Example: `sz = [2,3,4]` creates a 2-by-3-by-4 array.

Data Types: `double` | `single` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`

`typename` — Data type (class) to create
`'double'` (default) | `'single'` | `'logical'` | `'int8'` | `'uint8'` | ...

Data type (class) to create, specified as `'double'`, `'single'`, `'logical'`,`'int8'`, `'uint8'`, `'int16'`, `'uint16'`, `'int32'`, `'uint32'`, `'int64'`, `'uint64'`, or the name of another class that provides `zeros` support.

`p` — Prototype of array to create
array

Prototype of array to create, specified as an array.

Data Types: `double` | `single` | `logical` | `int8` | `int16` | `int32` | `int64` | `uint8` | `uint16` | `uint32` | `uint64`
Complex Number Support: Yes

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

Usage notes and limitations:

Dimensions must be nonnegative real integers.

See Also

See Also

`complex` | `eye` | `false` | `ones` | `rand` | `size`

Topics

"Class Support for Array-Creation Functions"
"Preallocation"

Introduced before R2006a

zip

Compress files into zip file

Syntax

```
zip(zipfile,files)
zip(zipfile,files,rootfolder)
entrynames = zip(zipfile,files,rootfolder)
```

Description

`zip(zipfile,files)` creates a zip file with the name `zipfile` from the list of files and folders specified in `files`. Folders recursively include all of their content.

`zip(zipfile,files,rootfolder)` specifies the path for `files` relative to `rootfolder` instead of the current folder.

`entrynames = zip(zipfile,files,rootfolder)` returns a cell array of character vectors containing the names of the files in `zipfile`. Specifying `rootfolder` is optional.

Input Arguments

`zipfile`

Name of the zip file, specified as a character vector. If `zipfile` has no extension, MATLAB appends the `.zip` extension.

If `files` includes relative paths, the zip file also contains relative paths. The zip file does not include absolute paths.

`files`

List of files or folders to include in `zipfile`, specified as a character vector or a cell array of character vectors.

Individual files that are on the MATLAB path can be specified as partial path names. Otherwise an individual file can be specified relative to the current folder or with an absolute path.

Folders must be specified relative to the current folder or with absolute paths. On UNIX systems, folders can also start with `~/` or `~username/`, which expands to the current user's home folder or the specified user's home folder, respectively. The wildcard character `*` can be used when specifying files or folders, except when relying on the MATLAB path to resolve a file name or partial path name.

`rootfolder`

Root of the paths for the files to zip, specified as a character vector.

Relative paths in the zip file reflect the relative paths in `files`, and do not include path information from `rootfolder`.

Default: current folder (`'.'`)

Output Arguments

`entrynames`

Cell array of character vectors containing the paths to the files in `zipfile`. If `files` includes relative paths, `entrynames` also contains relative paths.

Examples

Zip a File

Create a zip file of the file `membrane.m`. Save the zip file `tmwlogo.zip` in the current folder.

```
zip('tmwlogo','membrane.m');
```

Zip Selected Files

Zip the files `membrane.m` and `logo.m` into a file named `tmwlogo.zip`.

```
zip('tmwlogo.zip',{'membrane.m','logo.m'});
```

Zip all Code and MAT-Files in Current Folder

Zip all `.m` and `.mat` files in the current folder to the file `backup.zip`.

```
zip('backup',{'*.m','*.mat'});
```

Zip a Folder

Zip the contents of all subfolders of a folder, and store the relative paths in the zip file.

Create a folder `myfolder` containing a subfolder `mysubfolder` and the files `membrane.m` and `logo.m`.

```
mkdir myfolder;
movefile('membrane.m','myfolder');
movefile('logo.m','myfolder');
cd myfolder;
mkdir mysubfolder;
cd ..
```

Zip the contents of all subfolders of `myfolder`.

```
zip('myfiles.zip','myfolder');
```

Zip Between Folders

Suppose that you have files `thesis.doc` and `defense.ppt` in `d:/PhD`. Zip these files into `thesis.zip`, one level up from the current folder.

```
zip('../thesis.zip',{'thesis.doc','defense.ppt'},'d:/PhD');
```

Create Zip Archive of Web Page

Create a zip archive of a Web page.

Locate the list of files at the MATLAB® Central File Exchange uploaded within the past 7 days, that contain "Simulink."

```
filex = 'http://www.mathworks.com/matlabcentral/fileexchange/';
params = {'duration','7','term','simulink'};
```

Save the Web content to a file.

```
urlwrite(filex,'contains_simulink.html','get',params);
```

Create a zip archive of the retrieved Web page, using the `zip` function. `zip` creates a zip archive named `simulink_matches.zip` that contains the file, `contains_simulink.html`.

```
zip('simulink_matches.zip','contains_simulink.html');
```

Alternatives

To zip files in the Current Folder browser, select the files, right-click to open the context menu, and then select **Create Zip File**.

See Also

`gzip` | `gunzip` | `tar` | `untar` | `unzip`

Introduced before R2006a

zoom

Turn zooming on or off or magnify by factor

Syntax

```
zoom on
zoom off
zoom out
zoom reset
zoom
zoom xon
zoom yon
zoom(factor)
zoom(fig, option)
h = zoom(figure_handle)
```

Description

`zoom on` turns on interactive zooming. When interactive zooming is enabled in a figure, pressing a mouse button while your cursor is within an axes zooms into the point or out from the point beneath the mouse. Zooming changes the axes limits. When using zoom mode, you

- Zoom in by positioning the mouse cursor where you want the center of the plot to be and either
  - Press the mouse button or
  - Rotate the mouse scroll wheel away from you (upward).
- Zoom out by positioning the mouse cursor where you want the center of the plot to be and either
  - Simultaneously press **Shift** and the mouse button, or
  - Rotate the mouse scroll wheel toward you (downward).

Each mouse click or scroll wheel click zooms in or out by a factor of 2.

Clicking and dragging over an axes when zooming in is enabled draws a rubberband box. When you release the mouse button, the axes zoom in to the region enclosed by the rubberband box.

Double-clicking over an axes returns the axes to its initial zoom setting in both zoom-in and zoom-out modes.

`zoom off` turns interactive zooming off.

`zoom out` returns the plot to its initial zoom setting.

`zoom reset` remembers the current zoom setting as the initial zoom setting. Later calls to `zoom out`, or double-clicks when interactive `zoom` mode is enabled, will return to this zoom level.

`zoom` toggles the interactive zoom status between off and on (restoring the most recently used zoom tool).

`zoom xon` and `zoom yon` set `zoom on` for the *x*- and *y*-axis, respectively.

`zoom(factor)` zooms in or out by the specified zoom factor, without affecting the interactive zoom mode. Values greater than 1 zoom in by that amount, while numbers greater than 0 and less than 1 zoom out by `1/factor`.

`zoom(fig, option)` Any of the preceding options can be specified on a figure other than the current figure using this syntax.

`h = zoom(figure_handle)` returns a zoom *mode object* for the figure `figure_handle` for you to customize the mode's behavior.

Using Zoom Mode Objects

You can access the following properties.

- *`Enable`* `'on'|'off'` — Specifies whether this figure mode is currently enabled on the figure.
- `FigureHandle <handle>` — The associated figure handle, a read-only property that cannot be set.
- *`Motion`* `'horizontal'|'vertical'|'both'` — The type of zooming enabled for the figure . This property only affects axes in a 2-D view (`[0 90]`).

- *Direction* `'in'|'out'` — The direction of the zoom operation.
- *RightClickAction* `'InverseZoom'|'PostContextMenu'` — The behavior of a right-click action.

  A value of `'InverseZoom'` causes a right-click to zoom out. A value of `'PostContextMenu'` displays a context menu. This setting persists between MATLAB sessions.
- `UIContextMenu <handle>` — Specifies a custom context menu to be displayed during a right-click action.

  This property is ignored if the `RightClickAction` property has been set to `'InverseZoom'`.

Zoom Mode Callbacks

You can program the following callbacks for zoom mode operations.

- `ButtonDownFilter <function_handle>` — Function to intercept `ButtonDown` events

  The application can inhibit the zoom operation under circumstances the programmer defines, depending on what the callback returns. The input function handle should reference a function with two implicit arguments (similar to graphics object callbacks), as follows:

  ```
  function [res] = myfunction(obj,event_obj)
  % obj          handle to the object clicked on
  % event_obj    struct for event data (empty in this release)
  % res [output] a logical flag determines whether the zoom
  %              operation should take place(for 'res' set
  %              to 'false' or the 'ButtonDownFcn' property
  %              of the object should take precedence (when
  %              'res' is 'true')
  ```
- `ActionPreCallback <function_handle>` — Function to execute before zooming

  Set this callback if you want to execute code when a zoom operation starts. The input function handle should reference a function with two implicit arguments (similar to graphics object callbacks), as follows:

  ```
  function myfunction(obj,event_obj)
  % obj         handle to the figure clicked on
  ```

```
% event_obj   object containing struct of event data
```

The event data has the following field.

`Axes`	The handle of the axes that is being zoomed

- `ActionPostCallback <function_handle>` — Function to execute after zooming

  Set this callback if you want to execute code when a zoom operation finishes. The input function handle should reference a function with two implicit arguments (similar to graphics object callbacks), as follows:

```
function myfunction(obj,event_obj)
% obj         handle to the figure clicked on
% event_obj   object containing struct of event data
%             (same as the event data of the
%             'ActionPreCallback' callback)
```

Zoom Mode Utility Functions

The following functions in zoom mode query and set certain of its properties.

- `flags = isAllowAxesZoom(h,ax)` — Function querying permission to zoom axes.

  Calling the function `isAllowAxesZoom` on the zoom object, `h`, with a vector of axes handles, `ax`, as input returns a logical array of the same dimension as the axes handle vector, which indicates whether a zoom operation is permitted on the axes objects.
- `setAllowAxesZoom(h,ax,flag)` — Function to set permission to zoom axes.

  Calling the function `setAllowAxesZoom` on the zoom object, `h`, with a vector of axes handles, `ax`, and a logical scalar, `flag`, either allows or disallows a zoom operation on the axes objects.
- `cn = getAxesZoomConstraint(h,ax)` — Function to get constraints of zoom operations.

  Calling the function `getAxesZoomConstraint` on the zoom object, `h`, with an axes object, `ax`, as input returns the constraint for the axes. The returned constraint is one of these values: `'x'`, `'y'`, `'z'`, `'xy'`, `'xz'`, `'yz'`, or `'unconstrained'`.
- `setAxesZoomConstraint(h,ax,cnstr)` — Function to set constraints of zoom operations.

Calling the function `setAxesZoomConstraint` on the zoom object, `h`, with an axes object, `ax`, and a constraint option, `cnstr`, sets the constraint for the axes. Specify the constraint as one of these values: `'x'`, `'y'`, `'z'`, `'xy'`, `'xz'`, `'yz'`, or `'unconstrained'`.

- `sty = getAxes3DPanAndZoomStyle(h,ax)` — Function to get style of zoom operations.

  Calling the function `getAxes3DPanAndZoomStyle` on the zoom object, `h`, with a vector of axes handles, `ax`, as input returns the style of zooming for each axes. The returned value for each axes is either `'limits'` or `'camera'`.

- `setAxes3DPanAndZoomStyle(h,ax,style)` — Function to set style of zoom operations.

  Calling the function `setAxes3DPanAndZoomStyle` on the zoom object, `h`, with a vector of axes handles, `ax`, and a character array, `style`, sets the style of zooming on each axes. Specify the style as either `'limits'` or `'camera'`.

- `cns = getAxesZoomMotion(h,ax)` — Function to get constraints of zoom operations (not recommended, use `getAxesZoomConstraint`).

  Calling the function `getAxesZoomMotion` on the zoom object, `h`, with a vector of axes objects, `ax`, as input returns a character cell array of the same dimension as `ax`, which indicates the constraint for each axes. The returned value for each axes is `'horizontal'`, `'vertical'` or `'both'`.

- `setAxesZoomMotion(h,ax,constraints)` — Function to set constraints of zoom operations (not recommended, use `setAxesZoomConstraint`).

  Calling the function `setAxesZoomMotion` on the zoom object, `h`, with a vector of axes objects, `ax`, and a character array, `style`, sets the constraint for each axes. Specify the constraints as `'horizontal'`, `'vertical'` or `'both'`.

Examples

Example 1 — Entering Zoom Mode

Plot a graph and turn on Zoom mode:

```
plot(1:10);
```

```
zoom on
% zoom in on the plot
```

Example 2 — Constrained Zoom

Create zoom mode object and constrain to *x*-axis zooming.

Note: Starting in R2014b, you can set properties using dot notation. If you are using an earlier release, use the `set` function instead, such as `set(h,'Motion','horizontal')`.

```
plot(1:10);
h = zoom;
h.Motion = 'horizontal';
h.Enable = 'on';
% zoom in on the plot in the horizontal direction.
```

Example 3 — Constrained Zoom in Subplots

Create four axes as subplots and set zoom style differently for each by setting a different property for each axes handle:

```
ax1 = subplot(2,2,1);
plot(1:10);
h = zoom;
ax2 = subplot(2,2,2);
plot(rand(3));
setAllowAxesZoom(h,ax2,false);
ax3 = subplot(2,2,3);
plot(peaks);
setAxesZoomMotion(h,ax3,'horizontal');
ax4 = subplot(2,2,4);
contour(peaks);
setAxesZoomMotion(h,ax4,'vertical');
% Zoom in on the plots.
```

Example 4 — Coding a ButtonDown Callback

Create a buttonDown callback for zoom mode objects to trigger. Copy the following code to a new file, execute it, and observe zooming behavior.

Note: Starting in R2014b, you can set properties using dot notation. If you are using an earlier release, use the `set` function instead, such as `set(hLine,'ButtonDownFcn','disp(''This executes'')')`.

```
function demo
% Allow a line to have its own 'ButtonDownFcn' callback.
hLine = plot(rand(1,10));
hLine.ButtonDownFcn = 'disp(''This executes'')';
hLine.Tag = 'DoNotIgnore';
h = zoom;
h.ButtonDownFilter = @mycallback;
h.Enable = 'on';
% mouse click on the line
%
function [flag] = mycallback(obj,event_obj)
% If the tag of the object is 'DoNotIgnore', then return true.
objTag = obj.Tag;
if strcmpi(objTag,'DoNotIgnore')
   flag = true;
else
   flag = false;
end
```

Example 5 — Coding Pre- and Post-Callback Behavior

Create callbacks for pre- and post-buttonDown events for zoom mode objects to trigger. Copy the following code to a new file, execute it, and observe zoom behavior.

Note: Starting in R2014b, you can set properties using dot notation. If you are using an earlier release, use the `set` function instead, such as `set(h,'ActionPreCallback',@myprecallback)`.

```
function demo
% Listen to zoom events
plot(1:10);
h = zoom;
h.ActionPreCallback = @myprecallback;
h.ActionPostCallback = @mypostcallback;
h.Enable = 'on';
%
```

```
function myprecallback(obj,evd)
disp('A zoom is about to occur.');
%
function mypostcallback(obj,evd)
newLim = evd.Axes.XLim;
msgbox(sprintf('The new X-Limits are [%.2f %.2f].',newLim));
```

Example 6 — Creating a Context Menu for Zoom Mode

Coding a context menu that lets the user to switch to Pan mode by right-clicking.

Note: Starting in R2014b, you can set properties using dot notation. If you are using an earlier release, use the `set` function instead, such as `set(hZoom,'UIContextMenu',hCMZ)`.

```
figure
plot(magic(10))
hCMZ = uicontextmenu;
hZMenu = uimenu('Parent',hCMZ,'Label','Switch to pan',...
'Callback','pan(gcbf,''on'')');
hZoom = zoom(gcf);
hZoom.UIContextMenu = hCMZ;
zoom('on')
```

You cannot add items to the built-in zoom context menu, but you can replace it with your own.

Tips

`zoom` changes the axes limits by a factor of 2 (in or out) each time you press the mouse button while the cursor is within an axes. You can also click and drag the mouse to define a zoom area, or double-click to return to the initial zoom level.

You can create a zoom mode object once and use it to customize the behavior of different axes, as Example 3 illustrates. You can also change its callback functions on the fly.

Note: **Do not change figure callbacks within an interactive mode.** While a mode is active (when panning, zooming, etc.), you will receive a warning if you attempt to change any of the figure's callbacks and the operation will not succeed. The one exception to this

rule is the figure `WindowButtonMotionFcn` callback, which can be changed from within a mode. Therefore, if you are creating a UI that updates a figure's callbacks, the UI should somehow keep track of which interactive mode is active, if any, before attempting to do this.

When you assign different zoom behaviors to different `subplot` axes via a mode object and then link them using the `linkaxes` function, the behavior of the axes you manipulate with the mouse carries over to the linked axes, regardless of the behavior you previously set for the other axes.

Alternatives

Use the Zoom tools on the figure toolbar to zoom in or zoom out on a plot, or select **Zoom In** or **Zoom Out** from the figure's **Tools** menu. For details, see “Zooming in Graphs”.

See Also

`linkaxes` | `pan` | `rotate3d`

Introduced before R2006a

appdesigner

Create or edit app file in App Designer

Syntax

```
appdesigner
appdesigner filename

appdesigner(filename)
```

Description

`appdesigner` opens the app building environment, App Designer.

`appdesigner filename` opens the specified app file in App Designer. Specify the `filename` argument as a character vector enclosed in single quotes or without quotes.

`appdesigner(filename)` specifies `filename` as a character vector (enclosed in single quotes) or a string scalar (enclosed in double quotes).

Input Arguments

`filename` — Name of app file

character vector | `string` scalar

Name of an app file, specified as a character vector or `string` scalar. If `filename` appears in multiple folders on the search path, then include a path to the file. The file specification must be the complete or relative path to a file, or the name of a file on the MATLAB path.

Example: `appdesigner app1` specifies the file, `app1.mlapp`, as a command line argument without quotes.

Example: `appdesigner('app1')` specifies the file, `app1.mlapp`, as a character vector using single quotes.

Example: `appdesigner("app1")` specifies the file, `app1.mlapp`, as a `string` using double quotes.

Examples

Open a New App File

```
appdesigner
```

A new file titled `app1.mlapp` opens in App Designer. `app1.mlapp` does not appear in the MATLAB Current Folder browser until you save the file.

Specify App File as a Command Line Argument

```
appdesigner valueplots
```

App Designer opens and displays the existing `valueplots.mlapp` file, assuming that a file with that name is in the current folder or on the MATLAB search path. Otherwise, MATLAB throws a `file not found` error.

Specify App File as a String

```
appdesigner("valueplots")
```

App Designer opens and displays the existing `valueplots.mlapp` file, assuming that a file with that name is in the current folder or on the MATLAB search path.

- "Ways to Build Apps"
- "Create a Simple App Using App Designer"
- "Differences Between App Designer and GUIDE"
- "Graphics Support in App Designer"

See Also

Topics

"Ways to Build Apps"
"Create a Simple App Using App Designer"
"Differences Between App Designer and GUIDE"

"Graphics Support in App Designer"

Introduced in R2016a

Button Properties

(App Designer) Control button appearance and behavior

Compatibility

Valid for buttons created with App Designer or the `uibutton` function. For buttons created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

Buttons are UI components that typically generate an action when the app user presses and releases them. Button properties control the appearance and behavior of an instance of a button. To modify aspects of a button, change property values. Use dot notation to refer to a particular object and property:

```
f = uifigure;
button = uibutton(f);
txt = button.Text;
button.Text = 'Plot';
```

Appearance

`Text` — Button text
`'Button'` (default) | character vector | cell array of character vectors

Button text, specified as one of the following:

- character vector — Displayed as a single line of text. For example:

  ```
  uibutton('Text', 'Press');
  ```

- cell array of character vectors — Displayed as multiline text. Each row of the cell array is one line of text. Adjust the button size by changing the `Position` property value. For example:

  ```
  uibutton('Text', {'Press','Here'}, 'Position',[100 100 100 40]);
  ```

Example: `'Restart Simulation'`

Example: `{'Restart','Simulation'}`

`Icon` — File name of button icon

`''` (default) | character vector

File name of the button icon, specified as a character vector.

The file name can be an image file name on the MATLAB path or a full path to an image file. If you plan to share an app with others, put the image file on the MATLAB path to facilitate app packaging.

The image file type must be JPEG, GIF, or PNG.

- If the button text takes up all the space specified by the `Position` property value, then MATLAB does not display the icon.
- If some room is available for the icon, then MATLAB scales down the image to fit, if necessary.

Example: `'icon.png'`

Example: `'C:\Documents\icon.png'`

`HorizontalAlignment` — Horizontal alignment of icon and text

`'center'` (default) | `'left'` | `'right'`

Horizontal alignment of the icon and the text on the button, specified as `'center'`, `'left'`, or `'right'`.

The following image shows the three horizontal alignment options, center, left, and right, when the `VerticalAlignment` and `IconAlignment` properties are set to their default values (`'center'` and `'left'`, respectively).

`VerticalAlignment` — Vertical alignment of icon and text

`'center'` (default) | `'top'` | `'bottom'`

Vertical alignment of the icon and the text on the button, specified as `'center'`, `'top'`, or `'bottom'`.

These images show the three vertical alignment options when the value of `HorizontalAlignment` is `'center'` and the value of `IconAlignment` is `'left'`.



Note: Vertical alignment values appear to have no effect when the button is the default height.

`IconAlignment` — Location of icon relative to text

`'left'` (default) | `'center'` | `'top'` | `'bottom'` | `'right'`

Location of the button icon relative to the button text (if any), specified as one of the values in this table.

Note: The table images reflect the icon location when `HorizontalAlignment` and `VerticalAlignment` are each set to their default value, `'center'`.

Value	Result
`'left'`	
`'right'`	
`'top'`	

Value	Result
`'bottom'`	
`'center'`	

If you specify an empty character vector (`''`) for the `Text` property, then the icon aligns as though it is text, according to the values set for `HorizontalAlignment` and `VerticalAlignment`. The `IconAlignment` property value has no effect in this case.

`BackgroundColor` — Background color of button

`[.96 .96 .96]` (default) | RGB triplet | short name | long name

Background color of the button, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the button.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`Visible` — Button visibility

`'on'` (default) | `'off'`

Button visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the button is displayed on the screen. If the `Visible` property is set to `'off'`, the entire button is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Button location and size

`[100 100 100 22]` (default) | `[left bottom width height]`

Button location and size, relative to the parent container, specified as the vector, `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the button
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the button
`width`	Distance between the right and left outer edges of the button
`height`	Distance between the top and bottom outer edges of the button

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 52 22]`

`InnerPosition` — Inner location and size of button

`[100 100 100 22]` (default) | `[left bottom width height]`

Inner location and size of the button, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of button

`[100 100 100 22]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the button returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`

Long Name	Short Name	RGB Triplet
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.4 0.6 0.7]

FontWeight — Font weight
'normal' (default) | 'bold'

Font weight, specified as one of these values:

- 'normal' — Default weight as defined by the particular font
- 'bold' — Thicker character outlines than 'normal'

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

FontAngle — Character slant
'normal' (default) | 'italic'

Character slant, specified as 'normal' or 'italic'. Setting this property to italic selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

ButtonPushedFcn — Code to execute when app user clicks button
'' (default) | function handle | cell array | character vector

Code to execute when the app user clicks and releases the button, specified as a function handle, a cell array containing a function handle and additional arguments, or a character vector.

This callback function can access specific information about the user's interaction with the button. MATLAB passes this information in a ButtonPushedData object as the second argument to your callback function. In App Designer, the argument is

called `event`. You can query the object's properties using dot notation. For example, `event.Source` returns the `Button` object. The `ButtonPushedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ButtonPushedData` object.

Property	Value
`EventName`	`'ButtonPushed'`
`Source`	Component that executes the callback

For a complete example that uses the `event` argument, see `uibutton`.

MATLAB does not execute the callback function if the app user clicks the button, but then moves the mouse and releases the mouse button while the cursor is outside the bounds of the button.

`Enable` — Operational state of button

`'on'` (default) | `'off'`

Operational state of the button, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, the app user can press the button.
- If you set this property to `'off'`, the button appears dimmed, indicating that the app user cannot press it, and that the button will not trigger a callback.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running

callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

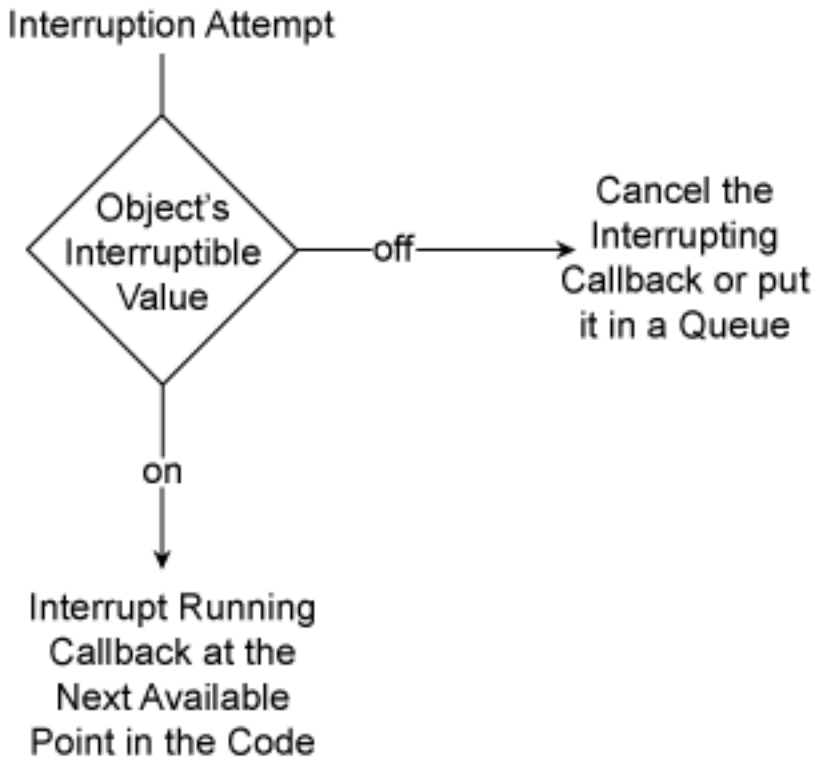

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uibutton'`

This property is read-only.

Type of graphics object, returned as `'uibutton'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'mybutton'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions

include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uibutton` | `uifigure`

Introduced in R2016a

ButtonGroup Properties

(App Designer) Control button group appearance and behavior

Compatibility

Valid for button groups used in App Designer or figures created with the `uifigure` function. For button groups used in GUIDE or apps created with the `figure` function, see Uibuttongroup Properties.

Description

Button groups are containers for managing exclusive selection of radio buttons and toggle buttons. They can contain radio buttons or toggle buttons, but not both. Typically, the button group generates an action when the selected button changes. Properties control the appearance and behavior of a button group. Use dot notation to refer to a particular object and property:

```
f = uifigure;
bg = uibuttongroup(f);
title = bg.Title;
bg.Title = 'Options';
```



Appearance

`Title` — Button group title
`''` (default) | character vector

Button group title, specified as a character vector. MATLAB does not interpret a vertical slash (`'|'`) character as a line break, it displays as a vertical slash in the button group title.

If you want to specify a Unicode character, pass the Unicode decimal code to the `char` function. For example, `['Multiples of ' char(960)]` displays as `Multiples of` π

Example: `'Options'`

Example: `['Multiples of ' char(960)]`

`TitlePosition` — Location of title
`'lefttop'` (default) | `'centertop'` | `'righttop'`

Location of the title, specified as `'lefttop'`, `'centertop'`, or `'righttop'`.

`BackgroundColor` — Button group background color
`[.94 .94 .94]` (default) | RGB triplet | short name | long name

Button group background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the button group.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`BorderType` — Button group border

`'line'` (default) | `'none'`

Button group border, specified as `'line'` or `'none'`.

`Visible` — Button group visibility

`'on'` (default) | `'off'`

Button group visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the button group is displayed on the screen. If the `Visible` property is set to `'off'`, the entire button group is hidden. However, you can still specify and access properties.

To make your app start faster, set the `Visible` property of all components that are not initially displayed to `'off'`.

Note Changing the `Visible` property of a `ButtonGroup` object does *not* change the values of the `Visible` properties of its child components. This is true even though hiding the button group causes the children to be hidden.

Location and Size

`Position` — Location and size of button group, including borders and title

`[left bottom width height]`

Location and size of the button group, including borders and title, specified as a vector of the form `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the button group
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the button group
`width`	Distance between the right and left outer edges of the button group
`height`	Distance between the top and bottom outer edges of the button group

All measurements specified by the `Units` property value.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

`OuterPosition` — Location and size of button group, including borders and title

`[left bottom width height]`

Location and size of the button group, including borders and title, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` property value.

`InnerPosition` — Location and size of button group, excluding borders and title

`[left bottom width height]`

This property is read-only.

Location and size of the button group, excluding borders and title, returned as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Value	Description
`left`	Distance from the inner left edge of the parent container to the inner left edge of the button group.
`bottom`	Distance from the inner bottom edge of the parent container to the inner bottom edge of the button group.
`width`	Distance between the inner edges of the button group's right and left borders.
`height`	Distance between the inner edges of the button group's top and bottom borders. This distance excludes the title, if it exists.

All measurements are in units specified by the `Units` property.

Note: These are some important points to consider when using the `InnerPosition` property:

- `InnerPosition` values are affected by the presence (or absence) of a title, the font characteristics, and the `BorderType`.
- `InnerPosition` values are relative to the parent container's *drawable area*. The drawable area is the area inside the borders of the container and does not include the area occupied by the title.

`Units` — Units of measurement

`'pixels'` (default)

Units of measurement, specified as `'pixels'`.

`AutoResizeChildren` — Allow child components to resize automatically

`'on'` (default) | `'off'`

Allow child components to resize automatically, specified as `'on'` or `'off'`.

- `'on'` — Child components automatically resize when this container resizes.
- `'off'` — Child components do not resize.

The `AutoResizeChildren` property only affects direct children of a container, not children inside nested containers.

If you prefer to use your own resizing algorithm, set this property to `'off'` and create a `SizeChangedFcn` callback for the container. Be aware that the `SizeChangedFcn` callback will not execute when `AutoResizeChildren` is set to `'on'`.

Alternatively, if you want a fixed layout that does not resize, set the Resize property of the `Figure` object to `'off'`.

`SizeChangedFcn` — Size change callback function

`''` (default) | function handle | cell array | character vector

Size change callback function, specified as one of these values:

- Function handle
- Cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.

- Character vector that is a valid MATLAB expression. MATLAB evaluates this expression in the base workspace.

Define this callback to customize the app layout when the size of this container changes (e.g., when the user resizes the window).

Note: The `SizeChangedFcn` callback will not execute unless the `AutoResizeChildren` property of this container is set to `'off'`. In App Designer, you can make the `SizeChangedFcn` executable by clearing the **Resize components when app is resized** check box in the **UI Figure Properties** panel.

The `SizeChangedFcn` callback executes when:

- This container becomes visible for the first time.
- This container is visible while its size changes.
- This container becomes visible for the first time after its size changes. This situation occurs when the size changes while the container is invisible, and then it becomes visible later.

Other important points to consider when defining a `SizeChangedFcn` callback:

- Consider delaying the display of this container until after all the variables that the `SizeChangedFcn` uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the container, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- If your app contains nested containers, they resize from the inside out.
- To access the container that is resizing from within the `SizeChangedFcn`, refer to the source object (the first input argument in the callback) or use the `gcbo` function.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`ForegroundColor` — Font color

`[0 0 0]` (default) | RGB triplet | short name | long name

Font color, specified as an RGB triplet, short name, or long name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`FontUnits` — Font unit of measurement

`'pixels'` (default)

Font unit of measurement, specified as `'pixels'`. Distances in pixels are independent of your system resolution on Windows and Macintosh systems:

- On Windows systems, a pixel is 1/96th of an inch.

- On Macintosh systems, a pixel is 1/72nd of an inch.
- On Linux systems, the size of a pixel is determined by your system resolution.

`FontWeight` — Font weight
`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant
`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`SelectedObject` — Currently selected radio button or toggle button
first radio button or toggle button in button group (default)

Currently selected radio button or toggle button, specified as a `RadioButton` or a `ToggleButton` object.

Get the value of this property to determine which button is currently selected within the button group.

Set the value of this property to change the currently selected button. When you change the selection using this property, MATLAB adjusts the `Value` property for the other buttons within the button group accordingly.

For example, suppose that your button group contains three radio buttons and you set the `SelectedObject` property to `radiobutton3`. MATLAB sets the `Value` property for each child `RadioButton` as follows:

- `radiobutton1.Value = false;`
- `radiobutton2.Value = false;`

- `radiobutton3.Value = true;`

In other words, setting the `SelectedObject` property has the same effect as setting the `Value` property of a `RadioButton` or `ToggleButton`.

`SelectionChangedFcn` — Code to execute when button selection changes

`''` (default) | function handle | cell array | character vector

Code to execute when button selection changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace

This callback function can access specific information about the user's interaction with the buttons. MATLAB passes this information in a `SelectionChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.NewValue` returns the currently selected button. The `SelectionChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `SelectionChangedData` object.

Property	Description
`OldValue`	Previously selected button
`NewValue`	Currently selected button
`Source`	Component that executes the callback
`EventName`	`'SelectionChanged'`

This callback function does not execute if a radio or toggle button `Value` property changes programmatically.

`Buttons` — Buttons managed by button group

array of `RadioButton` objects | array of `ToggleButton` objects

This property is read-only.

Buttons managed by the button group, returned as an array of `RadioButton` objects or an array of `ToggleButton` objects.

This property does not necessarily return all the child components of the `ButtonGroup` object. If you need to access child components that are not `RadioButton` or `ToggleButton` objects, use the `Children` property.

Callback Execution Control

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

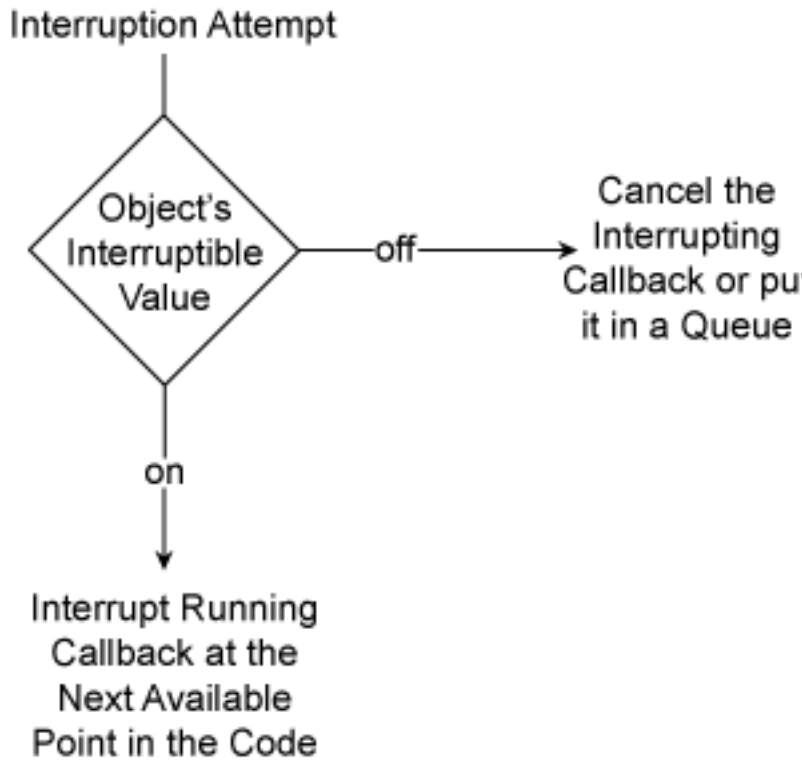

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uibuttongroup'`

This property is read-only.

Type of graphics object, returned as `'uibuttongroup'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'buttongroup1'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Children

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`Children` — `ButtonGroup` children

empty `GraphicsPlaceholder` array (default) | 1-D array of component objects

`ButtonGroup` children, returned as an empty `GraphicsPlaceholder` or a 1-D array of component objects. The children of a `ButtonGroup` object can be any UI component object, including another `ButtonGroup` object.

You cannot add or remove child components using the `Children` property of the `ButtonGroup`. Use the `Children` property value to view the list of children or to reorder the children. The order of the children in the property value array reflects the front-to-back order (stacking order) of the components on the screen.

To add a child to this list, set the `Parent` property of the child component to the `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.

HandleVisibility Value	Description
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uibuttongroup` | `uifigure`

Introduced in R2016a

CheckBox Properties

(App Designer) Control check box appearance and behavior

Compatibility

Valid for check boxes created with App Designer or the `uicheckbox` function. For check boxes created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

Check boxes are UI components that indicate one of two states, 0 (false) or 1 (true). Typically, check boxes generate an action when checked or cleared. Properties control the appearance and behavior of a check box. To modify aspects of a check box, change property values. Use dot notation to refer to a particular object and property:

```
f = uifigure;
cb = uicheckbox(f);
txt = cb.Text;
cb.Text = 'Show value';
```



Value

`Value` — State of check box
0 (default) | 1

State of the check box, specified as `0` (false) or `1` (true). When the `Value` property is set to `1`, the check box is checked. When the `Value` property is set to `0`, the check box is not checked.

Appearance

`Text` — Check box label
`'Check Box'` (default) | character vector | cell array of character vectors

Check box label, specified as one of the following:

- Character vector — Displayed as a single line of text. For example:

  ```
  uicheckbox('Text','Filter');
  ```

- Cell array of character vectors — Displayed as multiline text. Each row of the cell array is one line of text. (You must increase the size from the default value to accommodate the additional line of text.)

  ```
  uicheckbox('Text',{'Notch','Filter'},...
  'Position',[100 100 84 30]);
  ```

If you set the `Text` property to a cell array of character vectors, change the `Position` property to accommodate the additional lines of text.

`Visible` — Check box visibility

`'on'` (default) | `'off'`

Check box visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the check box is displayed on the screen. If the `Visible` property is set to `'off'`, the check box is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of check box

`[100 100 102 15]` (default) | `[left bottom width height]`

Location and size of the check box relative to the parent, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the check box
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the check box
`width`	Distance between the right and left outer edges of the check box

Element	Description
`height`	Distance between the top and bottom outer edges of the check box

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

All measurements are in pixel units.

Example: `[200 200 102 15]`

`InnerPosition` — Inner location and size of check box

`[100 100 102 15]` (default) | `[left bottom width height]`

Inner location and size of the check box, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property value for check boxes.

`OuterPosition` — Outer location and size of check box

`[100 100 102 15]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the check box returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property value.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size
12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color
`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight
`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font

- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when app user selects or clears check box

`[ ]` (default) | function handle | cell array | character vector

Code to execute when the app user selects or clears the check box, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the check box. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the check box. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of check box after most recent app user interaction with it.
`PreviousValue`	Value of check box before most recent app user interaction with it.

Property	Value
`Source`	Component that executes the callback.
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the check box value changes programmatically.

`Enable` — Operational state of check box

`'on'` (default) | `'off'`

Operational state of the check box, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the app user can select or clear the check box.
- If you set this property to `'off'`, then the check box appears dimmed, indicating that the app user cannot select or clear it, and that it will not trigger a callback.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

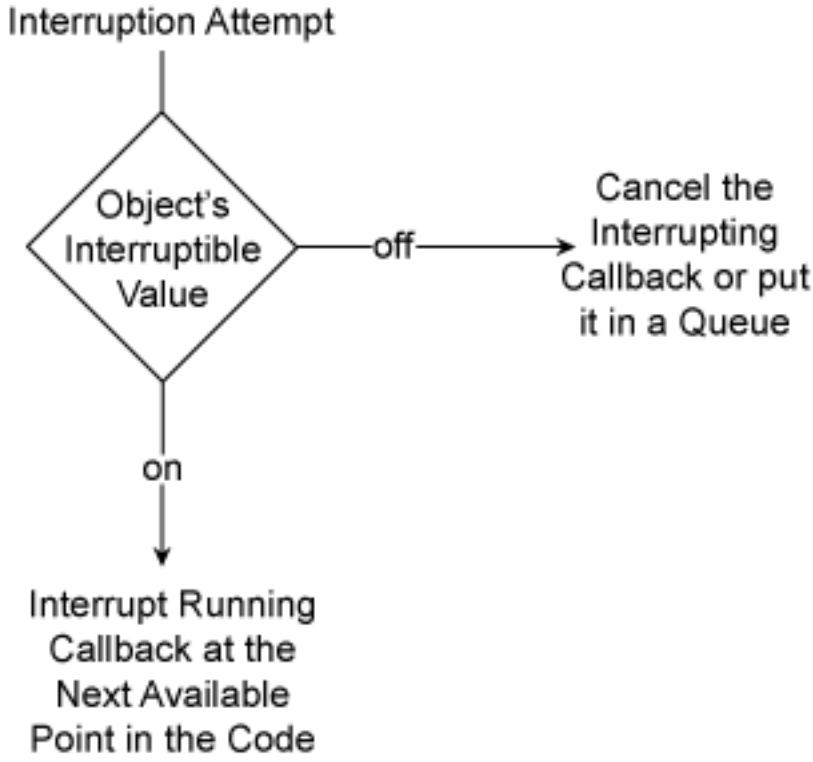

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose

callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Callback Execution Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uicheckbox'`

This property is read-only.

Type of graphics object, returned as `'uicheckbox'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the

object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'mycheckbox'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uicheckbox` | `uifigure`

Introduced in R2016a

DiscreteKnob Properties

(App Designer) Control discrete knob appearance and behavior

Compatibility

Valid for discrete knobs used in App Designer or in figures created with the `uifigure` function only. Apps created with GUIDE or the `figure` function do not support discrete knob components.

Description

Discrete knobs are UI components from which the app user can select one option from a set. Typically, discrete knobs generate an action when the app user changes the knob selection. Properties control the appearance and behavior of a discrete knob. To modify aspects of a discrete knob, change property values. Use dot notation to refer to a particular object and property:

```
f = uifigure;
k = uiknob(f,'discrete');
val = k.Value;
k.Value = 'Low';
```



Value

`Value` — Value of knob
`'Off'` (default) | element of `Items` array | element of `ItemsData` array

Value of the knob, specified as an element of the `Items` or `ItemsData` property array. The default is the first element of the `Items` array.

- If `ItemsData` is empty, `Value` is the selected element of `Items`.

- If `ItemsData` is not empty, `Value` contains the elements in `ItemsData` that corresponds to the selected element of `Items`.

Programmatic Changes When `ItemsData` Is Empty

Suppose all of the following are true:

- The `Items` property value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is empty.
- The app user sets the knob to `Blue`, before the programmatic change.

If the `Items` value changes programmatically to `{'Pink','Blue','Aqua'}`, then the element selected before the programmatic change is an element of the updated `Items` value. In this case, the `Value` remains `'Blue'` and the knob selection remains set to the second knob element .

If the `Items` value changes programmatically to `{'Red','Teal','Green'}`, then the knob element selected before the programmatic change is not an element of the updated `Items` value. In this case, the `Value` becomes the first element of the `Items` value (`'Red'`), and the knob is set to the first knob element.

Programmatic Changes When `ItemsData` Is Not Empty

Suppose all of the following are true:

- The `Items` value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is originally `[10 20 30]`.
- The app user has the second element, `Blue`, selected on the knob before the programmatic change.

If the `ItemsData` property changes programmatically to `[0 10 20]`, then the app user selection corresponds to an element of `ItemsData` that is the same before and after the programmatic change (20). However, 20 now corresponds to the third `Items` element. So the third list box element (Blue) is selected, even though the `Value` remains unchanged.

If the `ItemsData` property changes programmatically to `[10 100 1000]`, then the app user selection corresponds to an element of `ItemsData` that no longer exists. In this case,

the `Value` becomes the first element of `ItemsData` (10), and the knob is set to the first element (Red).

Programmatic Changes Resulting in Duplicate `ItemsData` Values

Suppose all of the following are true:

- The `Items` value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is originally `[10 20 20]`.
- The app user has the first element, `'Red'`, selected on the knob before the programmatic change.

If the `Value` property changes programmatically to `20`, then the knob is set to the first element of `Items` that matches that value, namely, `'Blue'`.

`Items` — Options for knob

`{'Off','Low','Medium','High'}` (default) | 1-by-n cell array of character vectors

Options for the knob, specified as a 1-by-n cell array of character vectors. The cell array must contain at least two elements. The knob displays as many options as there are elements in the `Items` property value. MATLAB labels the knob tick marks using the cell array values, applied in clockwise order on the knob.

Example: `{'Off','Slow','Fast'}`

Example: `{'1','2','3','4'}`

`ItemsData` — Data associated with each element of `Items`

empty array `[]` (default) | 1-by-n numeric array | 1-by-n cell array

Data associated with each element of the `Items` property value, specified as a 1-by-n numeric array or a 1-by-n cell array. It is valid to specify duplicate array elements in the `ItemsData` value.

When the number of array elements in the `ItemsData` and `Items` do not match:

- If the `ItemsData` value is empty, then all `Items` elements are presented to the app user.

- If the `ItemsData` value has more elements than the `Items` value, then all the `Items` elements are presented to the app user and MATLAB ignores the extra `ItemsData` elements.
- If the `ItemsData` value has fewer elements than the `Items` value (but greater than none), then the only `Items` elements presented to the app user are those that have a corresponding `ItemsData` value.

Example: `{'One' 'Two' 'Three'}`

Example: `{10 20 30 40}`

Appearance

`Visible` — Visibility of knob

`'on'` (default) | `'off'`

Visibility of the knob, specified as `'on'` or `'off'`. The `Visible` property determines whether the knob is displayed on the screen. If the `Visible` property is set to `'off'`, the entire knob is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of knob

`[100 100 60 60]` (default) | `[left bottom width height]`

Location and size of the knob, excluding the state marks and labels, specified as the vector, `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the knob
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the knob

Element	Description
`width`	Distance between the right and left outer edges of the knob, excluding tick marks and labels
`height`	Distance between the top and bottom outer edges of the knob, excluding tick marks and labels

All measurements are in pixel units. Due to aspect ratio constraints, you cannot change the knob height and width independently of each other. To increase the knob size, set width and height using `Position(3:4) = [width height]`.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 200 60 60]`

`InnerPosition` — Inner location and size of knob

`[100 100 60 60]` (default) | `[left bottom width height]`

Inner location and size of the knob, excluding state marks and state labels, specified as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to `Position` for knob components.

`OuterPosition` — Outer location and size of knob

`[73 100 127 76]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the knob, including state marks and labels, returned as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size
12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color
`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight
`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when knob selection changes

`''` (default) | function handle | cell array | character vector

Code to execute when the knob selection changes, specified as a function handle, a cell array containing a function handle and additional arguments, or a character vector.

This callback function can access specific information about the user's interaction with the knob. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the knob. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of knob after app user's most recent interaction with it.
`PreviousValue`	Value of knob before app user's most recent interaction with it.
`Source`	Component that executes the callback.

Property	Value
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the app user clicks the currently selected option, or if the `Value` property setting changes programmatically.

`Enable` — Operational state of knob

`'on'` (default) | `'off'`

Operational state of the knob, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the app user can turn the knob.
- If you set this property to `'off'`, then the appearance of the knob appears dimmed, indicating that the app user cannot turn the knob and it will not trigger a callback.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

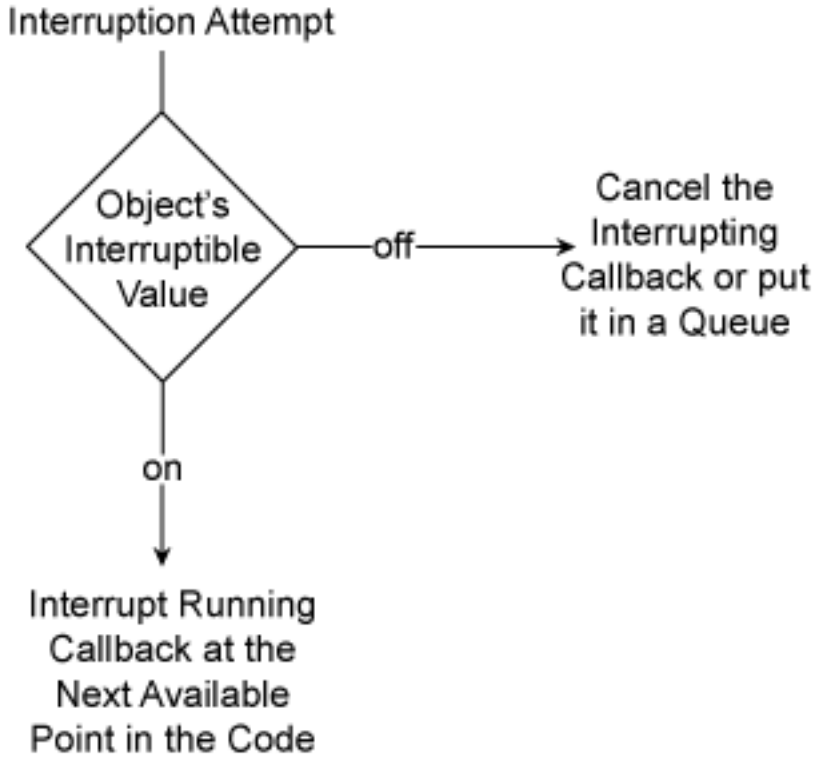

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose

callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uidiscreteknob'`

This property is read-only.

Type of graphics object, returned as `'uidiscreteknob'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the

object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'myknob'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uiknob`

Introduced in R2016a

DropDown Properties

(App Designer) Control drop-down component appearance and behavior

Compatibility

Valid for drop-down components created with App Designer or the `uidropdown` function. For drop-down components created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

Drop-down components are UI components that enable the app user to select an option or type in text. Typically, an action occurs when the app user changes the selection or enters a value. Use properties to control the appearance and behavior of a drop-down component. To refer to a particular object and property, use dot notation:

```
f = uifigure;
dd = uidropdown(f);
txt = dd.Items;
dd.Items = {'Amoxicillian','Erythromycin',...
            'Penecillin','Tobramycin', };
```



Value

`Value` — Drop-down component value
`'Option 1'` (default) | element of `Items` cell array | element of `ItemsData` cell array | app-user-entered value

Drop-down component value, specified as an element of the `Items` or `ItemsData` cell array or the app-user-entered value. The default is the first element of the `Items` array.

- If `ItemsData` is empty, `Value` is the selected element of `Items`.
- If `ItemsData` is not empty, `Value` is the element in `ItemsData` that corresponds to the selected element of `Items`

The app user can type values in the drop-down component if the `Editable` property value is `'on'`.

Programmatic Changes When `ItemsData` Is Empty

Suppose all of the following are true:

- The `Items` property value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is empty.
- The app user has the second element, `Blue`, selected from the drop-down component.

If the `Items` value changes programmatically to `{'Pink','Blue','Aqua'}`, then the element selected before the programmatic change is an element of the updated `Items` value. In this case, the `Value` remains `'Blue'` and the selection remains the second drop-down component element.

If the `Items` value changes programmatically to `{'Red','Teal','Green'}`, then the drop-down component element selected before the programmatic change is not an element of the updated `Items` value. In this case, the `Value` becomes the first element of the `Items` value (`'Red'`) and the selection becomes the first drop-down component element.

Programmatic Changes When `ItemsData` Is Not Empty

Suppose all of the following are true:

- The `Items` value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is originally `[10 20 30]`.
- The app user has the second element, `Blue`, selected from the drop-down component before the programmatic change.

If the `ItemsData` property changes programmatically to `[0 10 20]`, then the app user selection corresponds to an element of `ItemsData` that is the same before and after the

programmatic change (20). However, 20 now corresponds to the third `Items` element. So the third drop-down component element (Blue) is selected, even though the `Value` remains unchanged.

If the `ItemsData` property changes programmatically to `[10 100 1000]`, then the app user selection corresponds to an element of `ItemsData` that no longer exists. In this case, the `Value` becomes the first element of `ItemsData` (10) and the first drop-down component item (Red) is selected.

Programmatic Changes Resulting in Duplicate `ItemsData` Values

Suppose all of the following are true:

- The `Items` value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is originally `[10 20 20]`.
- The app user has the first element, `'Red'`, selected from the drop-down component before the programmatic change.

If the `Value` property changes programmatically to `20`, then the drop-down component selection becomes the first element of `Items` that matches that value, namely, `'Blue'`.

`Items` — Drop-down component options presented to app user
`{'Option 1','Option 2','Option 3','Option 4'}` (default) | 1-by-n cell array of character vectors

Drop-down component options presented to the app user, specified as a 1-by-n cell array of character vectors. Duplicate elements are allowed. The drop-down component displays as many options as there are elements in the `Items` property value.

Example: `{'Red','Yellow','Blue'}`

Example: `{'1','2','3'}`

`ItemsData` — Data associated with each element of the `Items` property value
empty array (`[ ]`) (default) | 1-by-n numeric array | 1-by-n cell array

Data associated with each element of the `Items` property value, specified as a 1-by-n numeric array or a 1-by-n cell array. Duplicate elements are allowed.

For example, if you set the `Items` value to employee names, you might set the `ItemsData` value to corresponding employee ID numbers. The `ItemsData` value is not visible to the app user.

If the number of array elements in the `ItemsData` value and the `Items` value do not match, one of the following occurs:

- When the `ItemsData` value is empty, then all the elements of the `Items` value are presented to the app user.
- When the `ItemsData` value has more elements than the `Items` value, then all the elements of the `Items` value are presented to the app user. MATLAB ignores the extra `ItemsData` elements.
- When the `ItemsData` value is not empty, but has fewer elements than the `Items` value, the only elements of the `Items` value presented to the app user are those that have a corresponding element in the `ItemsData` value.

Example: `{'One','Two','Three'}`

Example: `[10 20 30 40]`

Appearance

`BackgroundColor` — Drop-down component background color

`[.96 .96 .96]` (default) | RGB triplet | short name | long name

Drop-down component background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the drop-down component.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`, for example, `[0.4 0.6 0.7]`. This table lists RGB triplet values that have equivalent color names.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`

Long Name	Short Name	RGB Triplet
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`Visible` — Drop-down component visibility

`'on'` (default) | `'off'`

Drop-down component visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the drop-down component is displayed on the screen. If the `Visible` property is set to `'off'`, then the drop-down component is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of drop-down component

`[100 100 100 22]` (default) | `[left bottom width height]`

Location and size of the drop-down component relative to the parent, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the drop-down component
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the drop-down component
`width`	Distance between the right and left outer edges of the drop-down component

Element	Description
`height`	Distance between the top and bottom outer edges of the drop-down component

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 22]`

`InnerPosition` — Inner location and size of drop-down component

`[100 100 100 22]` (default) | `[left bottom width height]`

Inner location and size of the drop-down component, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to `Position` for drop-down components.

`OuterPosition` — Outer location and size of drop-down component

`[100 100 100 22]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of drop-down component returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to `Position` for drop-down components.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when selection changes

`''` (default) | function handle | cell array | character vector

Code to execute when the drop-down selection changes, specified as a function handle, a cell array containing a function handle and additional arguments, or a character vector.

This callback function can access specific information about the user's interaction with the drop-down. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the drop-down. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Drop-down component value after app user's most recent interaction with it.
`PreviousValue`	Drop-down component value before app user's most recent interaction with it.
`Edited`	Logical value (0 or 1) that indicates whether the callback was executed as a result of typing a value into the drop-down component. The `Edited` value is 1 when the app user typed in the drop-down component and 0 when the app user selected an option from the drop-down component.
`Source`	Component that executes the callback.

Property	Value
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the app user clicks the currently selected option, or if the `Value` property setting changes programmatically.

`Editable` — Editable state of drop-down component

`'off'` (default) | `'on'`

Editable state of the drop-down component, specified as `'off'` or `'on'`.

If the `Enable` property value is `'off'`, then the app user cannot change the drop-down component text, even if the Editable property value is `'on'`.

`Enable` — Operational state of drop-down component

`'on'` (default) | `'off'`

Operational state of the drop-down component , specified as `'on'` or `'off'`.

- If you set this property value to `'on'`, then the appearance of the drop-down component indicates that the app user can change the drop-down component value.
- If you set this property value to `'off'`, then the appearance of the drop-down component appears dimmed. This appearance indicates that the app user cannot change the drop-down component value, and that the drop-down component will not trigger any callbacks.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running

callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

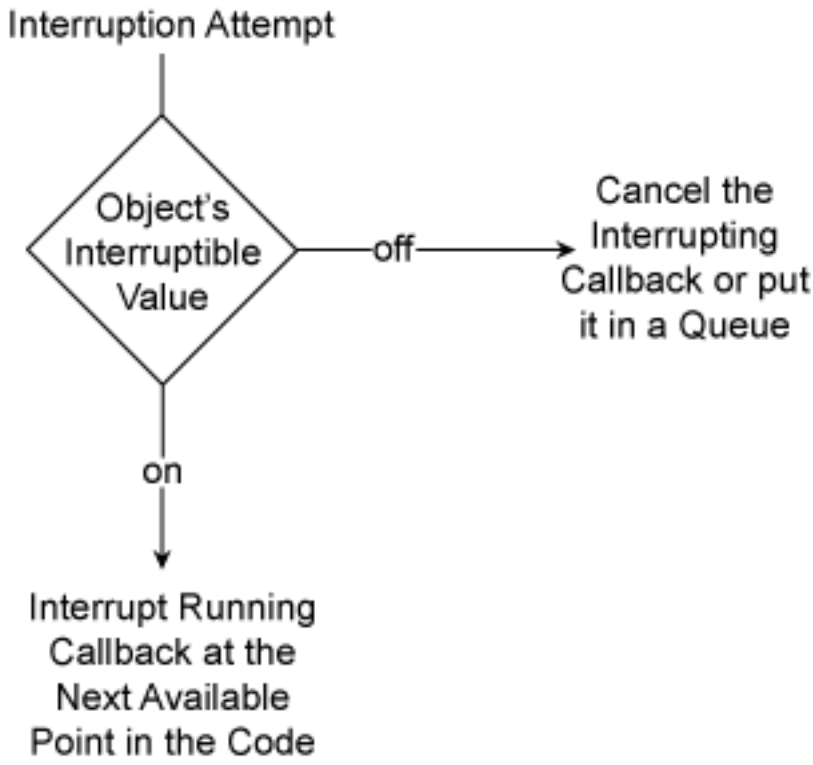

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uidropdown'`

This property is read-only.

Type of graphics object, returned as `'uidropdown'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'mydropdown'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions

include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uidropdown` | `uifigure`

Introduced in R2016a

EditField Properties

(App Designer) Control edit field appearance and behavior

Compatibility

Valid for text edit fields created with App Designer or the `uieditfield` function. For edit fields created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

Edit fields are app components into which the app user can type text. Typically, edit fields generate an action when the app user changes the text. Properties control the appearance and behavior of an edit field. Use dot notation to refer to a particular object and property:

```
f = uifigure;
txtfield = uieditfield(f);
txt = txtfield.Value;
txtfield.Value = 'Penicillin';
```

Value

`Value` — Text in edit field
`''` (default) | character vector

Text in the edit field, specified as a character vector. MATLAB displays the text as a single line. If you want to allow multiple lines of text, use a text area component instead of an edit field.

Example: `'Hello world'`

Appearance

`BackgroundColor` — Edit field background color
`[1 1 1]` (default) | RGB triplet | short name | long name

Edit field background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the edit field.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`HorizontalAlignment` — Horizontal alignment of text within edit field

`'left'` (default) | `'right'` | `'center'`

Alignment of text within the edit field, specified as `'left'`, `'right'`, or `'center'`. The alignment affects the display as the app user edits the edit field and how MATLAB displays the text in the app.

`Visible` — Edit field visibility

`'on'` (default) | `'off'`

Edit field visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the edit field is displayed on the screen. If the `Visible` property is set to `'off'`, the edit field is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of edit field

`[100 100 100 22]` (default) | `[left bottom width height]`

Location and size of the edit field relative to the parent, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the edit field
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the edit field
`width`	Distance between the right and left outer edges of the edit field
`height`	Distance between the top and bottom outer edges of the edit field

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[150 130 100 22]`

`InnerPosition` — Inner location and size of edit field

`[100 100 100 22]` (default) | `[left bottom width height]`

Inner location and size of the edit field, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of edit field

`[100 100 100 22]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of edit field returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`

Long Name	Short Name	RGB Triplet
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight
`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant
`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when edit field value changes
`''` (default) | function handle | cell array | character vector

Code to execute when the edit field value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

The callback executes when the app user changes text in the edit field and either presses **Enter** or clicks outside the edit field.

This callback function can access specific information about the user's interaction with the edit field. MATLAB passes this information in a `ValueChangedData`

object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the edit field. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of edit field after app user's most recent interaction with it
`PreviousValue`	Value of edit field before app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the edit field value changes programmatically.

`ValueChangingFcn` — Code to execute while app user types in edit field

`''` (default) | function handle | cell array | character vector

Code to execute while the app user types in the edit field, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This callback function can access specific information about the user's interaction with the edit field. MATLAB passes this information in a `ValueChangingData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.Value` is the value in the edit field that triggered the execution of the callback. The `ValueChangingData` object is not available to callback functions specified as character vectors.

Here are the properties of the `ValueChangingData` object:

Property	Description
`Value`	Value that triggered the execution of the callback
`Source`	Component that executes the callback
`EventName`	`'ValueChanging'`

The `Value` property of the `EditField` object is not updated until the app user presses the **Enter** key. However, you can get the text that the user is typing before they press **Enter** by querying the `Value` property of the `ValueChangingData` object.

The `ValueChangingFcn` callback executes as follows:

- As the user types in the edit field, the callback executes repeatedly.
- When the user presses **Enter**, the callback executes.

If the edit field value changes programmatically, then the callback does not execute.

`Editable` — Whether edit field is editable

`'on'` (default) | `'off'`

Whether the edit field is editable, specified as `'on'` or `'off'`.

Use this property in combination with the `Enable` property value to determine if and how the component responds to app user input:

- To make the edit field editable and the associated callback triggerable, set both the `Enable` property and the `Editable` property values to `'on'`.

- To make the edit field uneditable, but the text easy to read, set the `Enable` property value to `'on'` and the `Editable` property value to `'off'`.

- To make the edit field uneditable and the text dimmed, set both properties to `'off'`.



`Enable` — Operational state of edit field

`'on'` (default) | `'off'`

Operational state of the edit field, specified as `'on'` or `'off'`.

Use this property in combination with the `Editable` property value to determine if and how the component responds to app user input:

- To make the edit field editable and the associated callback triggerable, set both the `Enable` property and the `Editable` property values to `'on'`.

- To make the edit field uneditable, but the text easy to read, set the `Enable` property value to `'on'` and the `Editable` property value to `'off'`.

- To make the edit field uneditable and the text dimmed, set both properties to `'off'`.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running

callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

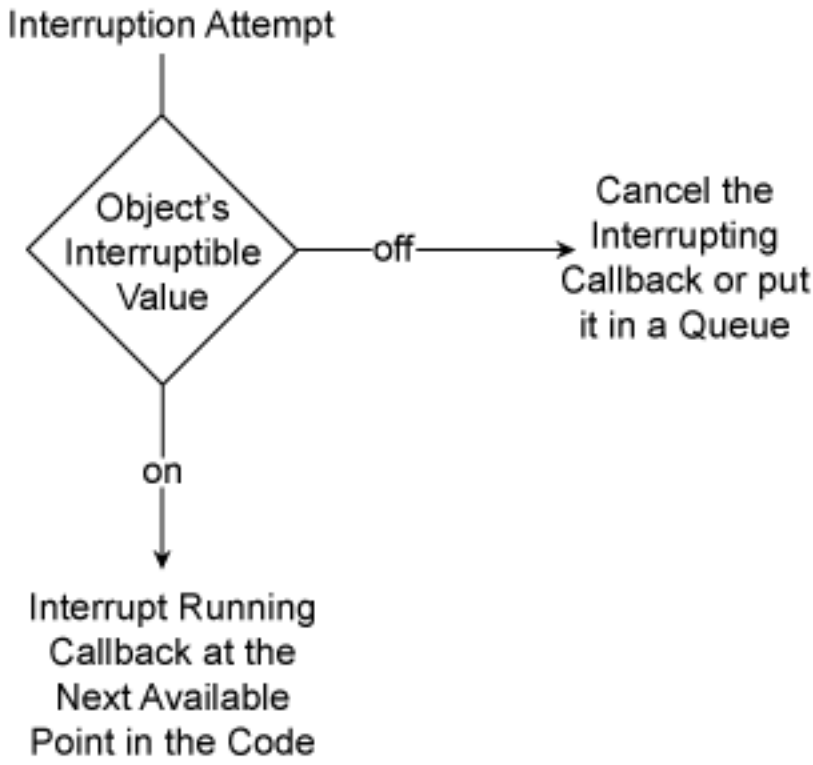

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uieditfield'`

This property is read-only.

Type of graphics object, returned as `'uieditfield'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'myeditfield'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions

include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uieditfield` | `uifigure`

Introduced in R2016a

Gauge Properties

(App Designer) Control gauge appearance and behavior

Compatibility

Valid for circular gauges used in App Designer or in figures created with the `uifigure` function only. Apps created with GUIDE or the `figure` function do not support circular gauge components.

Description

Gauges are app components that represent a measurement instrument. Properties control the appearance and behavior of a gauge. Use dot notation to refer to a particular object and property:

```
f = uifigure;
g = uigauge;
val = g.Value;
g.Value = 45;
```



Value

`Value` — Location of gauge needle
0 (default) | numeric

Location of the gauge needle, specified as any numeric value.

- If the value is less than the minimum `Limits` property value, then the needle points to a location immediately before the beginning of the scale.
- If the value is more than the maximum `Limits` property value, then the needle points to a location immediately after the end of the scale.

Changing the `Limits` property value has no effect on the `Value` property setting.

Example: `60`

`Limits` — Minimum and maximum gauge scale values

[0 100] (default) | two-element numeric array

Minimum and maximum gauge scale values, specified as a two-element numeric array. The first value in the array must be less than the second value.

If you change `Limits` such that the `Value` property is less than the new lower limit, or more than the new upper limit, then the gauge needle points to a location off the scale.

For example, suppose `Limits` is `[0 100]` and the `Value` property is 20. If the `Limits` changes to `[50 100]`, then the needle points to a location off the scale, slightly less than 50.

Tick Values and Labels

`MajorTicks` — Major tick mark values

[0 20 40 60 80 100] (default) | 1-by-n numeric array

Major tick mark values, specified as a 1-by-n numeric array. Any array value that falls outside the `Limits` property value is not displayed. MATLAB removes duplicate array values.

Setting the `MajorTicks` property value sets the `MajorTicksMode` property value to `'manual'`.

`MajorTicksMode` — Major tick creation mode

`'auto'` (default) | `'manual'`

Major tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of major ticks.

- `'manual'` — You specify the `MajorTicks` value array.

`MinorTicks` — Minor tick values

[0:4:100] (default) | numeric array

Minor tick values, specified as a numeric array. Any array value that falls outside the `Limits` property value is not displayed on the gauge. If a minor tick falls on the same value as a major tick, only the major tick is displayed. MATLAB removes duplicate `MinorTicks` element values. Setting the `MinorTicks` property value sets the `MinorTicksMode` property value to `'manual'`.

To exclude minor ticks from the gauge, specify an empty array.

`MinorTicksMode` — Minor tick creation mode

`'auto'` (default) | `'manual'`

Minor tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of minor ticks. MATLAB does not generate minor ticks for major ticks that are beyond scale limits. If the `Limits` property value changes, then MATLAB updates minor ticks to populate the full scale range (the `MinorTicks` property is updated accordingly).

- `'manual'` — You specify the `MinorTicks` property numeric array. The `MinorTicks` property value does not change size or content on its own.

`MajorTickLabels` — Labels on each major tick mark

`{'0','20','40','60','80','100'}` (default) | cell array of character vectors

Labels on each major tick mark, specified as a cell array of character vectors. MATLAB uses each element as the label for the major tick marks specified in the `MajorTicks` property.

Setting `MajorTickLabels` changes the `MajorTickLabelsMode` value to `'manual'`.

- If you specify more `MajorTickLabels` elements than `MajorTicks` elements, then MATLAB ignores the extra labels.
- If you specify fewer `MajorTickLabels` elements than `MajorTicks` elements, then MATLAB leaves the extra ticks unlabeled.

To create a blank label to a major tick, specify an empty character vector for that tick's corresponding `MajorTickLabels` element.

Example: `{'100','80','60','40','20','0'}`

Example: `{'Min','Max'}`

`MajorTickLabelsMode` — Creation mode of major tick labels

`'auto'` (default) | `'manual'`

Creation mode of the major tick labels, specified as one of the following:

- `'auto'` — MATLAB creates a cell array of character vectors to populate `MajorTickLabels`.
- `'manual'` — You specify the `MajorTickLabels` cell array of character vectors.

Scale Direction and Colors

`ScaleDirection` — Direction of gauge scale

`'clockwise'` (default) | `'counterclockwise'`

Direction of the gauge scale, specified as one of the following:

- `'clockwise'` — The scale appears such that the scale tick values increase in a clockwise manner.
- `'counterclockwise'` — The scale appears such that the scale tick values increase in a counterclockwise manner.

`ScaleColors` — Colors that appear on gauge scale

[ ] (default) | RGB triplet | predefined color name | 1-by-n cell array

Colors that appear on the gauge scale, specified as one of the following:

- n-by-3 array of RGB values, where each element is a valid RGB value between 0 and 1.
- 1-by-n cell array, where each element is a color name or an RGB triplet. The cell array can contain a mix of RGB triplets and color names.

  MATLAB stores and returns all color names and RGB triplets as an n-by-3 array.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`, for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Each row of the `ScaleColors` array represents the color for the ith colored scale region.

If you set the `ScaleColors` property without explicitly setting the `ScaleColorLimits` property, then MATLAB determines the `ScaleColorLimits` property value by creating n equally spaced, nonoverlapping limits that span the gauge's entire scale. For example, if the `Limits` property value is `[0 75]`, and the `ScaleColors` property value is `{'green','yellow','red'}`, then MATLAB sets `ScaleColorLimits` to `[0 25; 25 50; 50 75]`.

Similarly, if you change `Limits`, without explicitly setting `ScaleColorLimits`, then MATLAB sets the `ScaleColorLimits` property value as described in the preceding paragraph.

Example: `{'blue','green'}`

Example: `[0 .5 .2; .2 .6 0]`

Example: `{[0 .5 .2], [.2 .6 0]}`

Example: `{[0 .5 .2], 'green'}`

`ScaleColorLimits` — Colored regions of scale

[ ] (default) | array

Colored regions of the scale, specified as a n-by-2 array of numeric values. For every row in the array, the first element must be less than the second element.

When applying colors to the gauge scale, MATLAB applies the colors starting at the first row in the `ScaleColors` property value. Therefore, if two rows in `ScaleColorLimits` property value overlap, then the color applied later takes precedence.

A gauge does not display any portion of a `ScaleColorLimits` property value element that falls outside of the `Limits` property value.

If the `ScaleColors` and `ScaleColorLimits` property values are different sizes, then the gauge shows only the colors that have matching limits. For example, if the `ScaleColors` property value has three rows, but the `ScaleColorLimits` property value has only two rows, then the gauge displays the first two color/limit pairs only.

Example: [10 20; 20 30]

Appearance

`BackgroundColor` — Background color

`[1 1 1]` (default) | RGB triplet | short name | long name

Background color of the gauge, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the gauge.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`Visible` — Visibility of gauge

`'on'` (default) | `'off'`

Visibility of the gauge, specified as `'on'` or `'off'`. The `Visible` property determines whether the gauge is displayed on the screen. If the `Visible` property is set to `'off'`, then the entire gauge is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of gauge

`[100 100 120 120]` (default) | `[left bottom width height]`

Location and size of the gauge relative to the parent container, specified as the vector, `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of an imaginary box surrounding the gauge
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of an imaginary box surrounding the gauge
`width`	Distance between the right and left outer edges of the gauge
`height`	Distance between the top and bottom outer edges of the gauge

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers).

The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[200 120 120 120]`

`InnerPosition` — Inner location and size of gauge

`[100 100 120 120]` (default) | `[left bottom width height]`

Inner location and size of the gauge, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of gauge

`[100 100 120 120]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the gauge returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

FontColor — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

FontWeight — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

FontAngle — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`Enable` — Operational state of gauge

`'on'` (default) | `'off'`

Operational state of gauge, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the appearance of the gauge indicates that the gauge is operational.
- If you set this property to `'off'`, then the appearance of the gauge appears dimmed, indicating that the gauge is not operational.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

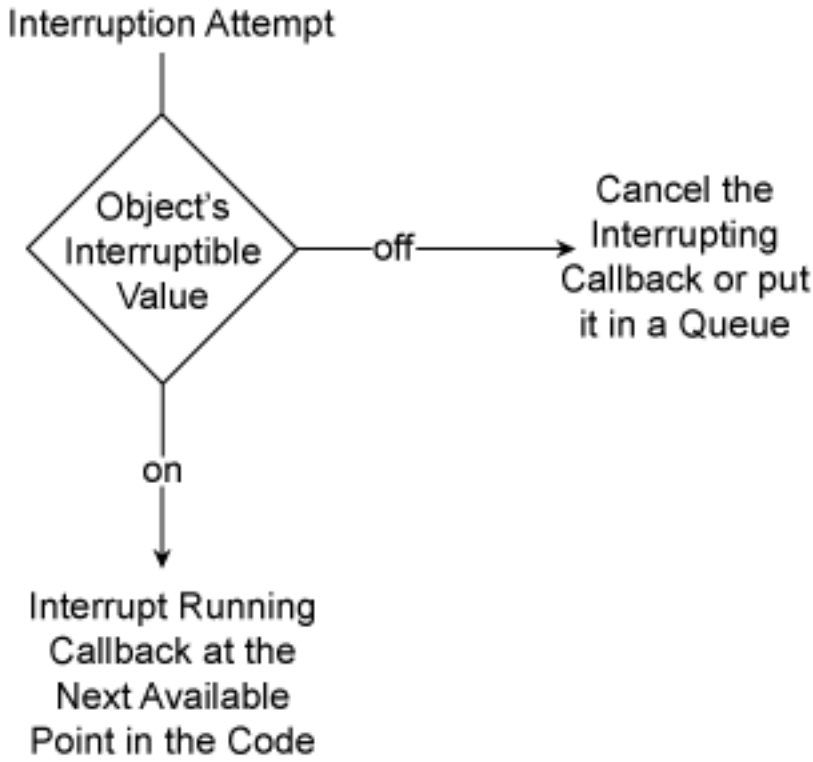

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose

callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uigauge'`

This property is read-only.

Type of graphics object, returned as `'uigauge'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the

object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'mybutton'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uigauge`

Introduced in R2016a

Knob Properties

(App Designer) Control knob appearance and behavior

Compatibility

Valid for knobs used in App Designer or in figures created with the `uifigure` function only. Apps created with GUIDE or the `figure` function do not support knob components.

Description

Knobs are app components representing instrument control knobs that the app user can adjust to control a value. Properties control the appearance and behavior of a knob. Use dot notation to refer to a particular object and property:

```
f = uifigure;
k = uiknob(f);
k.Value = 45;
val = k.Value;
```



Value

`Value` — Value of knob
0 (default) | numeric

Value of the knob, specified as a numeric. The numeric must be within the range specified for `Limits`.

`Limits` — Minimum and maximum knob values
[0 100] (default) | two-element numeric array

Minimum and maximum knob values, specified as a two-element numeric array. The first value in the array must be less than the second value.

If you change `Limits` such that the `Value` property is less than the new lower limit, then the `Value` property updates to the new lower limit. Similarly, if you change `Limits` such that the `Value` is greater than the new upper limit, then `Value` property updates to the new upper limit.

For example, suppose `Limits` is `[0 100]` and the `Value` property is `20`. If the `Limits` property changes to `[50 100]`, then the `Value` updates to `50`.

Tick Values and Labels

`MajorTicks` — Major tick mark values

[0 10 20 30 40 50 60 70 80 90 100] (default) | array of numeric values

Major tick mark values, specified as an array of numeric values. Each value must be equal to or greater than 0. Any array values that fall outside `Limits` are not displayed on the knob. MATLAB removes duplicate array values.

Setting the `MajorTicks` property value sets the `MajorTicksMode` property value to `'manual'`.

`MajorTicksMode` — Major tick creation mode

`'auto'` (default) | `'manual'`

Major tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of major ticks.
- `'manual'` — You specify the `MajorTicks` value array.

`MinorTicks` — Minor tick mark values

[0:2:100] (default) | numeric array

Minor tick mark values, specified as a numeric array. Any `MinorTicks` elements that fall outside `Limits` are not displayed on the gauge. If a minor tick falls on the same value as a major tick, only the major tick is displayed. MATLAB removes duplicate `MinorTicks` element values. Setting the `MinorTicks` property value sets the `MinorTicksMode` property value to `'manual'`.

To exclude minor ticks from the gauge, specify an empty array.

`MinorTicksMode` — Minor tick creation mode

`'auto'` (default) | `'manual'`

Minor tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of minor ticks. MATLAB does not generate minor ticks for major ticks that are beyond scale limits. If the `Limits` property value changes, then MATLAB updates minor ticks to populate the full scale range (the `MinorTicks` property is updated accordingly).

- `'manual'` — You specify the `MinorTicks` property numeric array. The `MinorTicks` property value does not change size or content on its own.

`MajorTickLabels` — Labels on major tick marks

`{'0','10','20','30','40','50','60','70','80','90','100'}` (default) | cell array of character vectors

Labels on major tick marks, specified as a cell array of character vectors. MATLAB uses each element as the label for the major tick marks specified in the `MajorTicks` property.

Setting `MajorTickLabels` changes the `MajorTickLabelsMode` value to `'manual'`.

To create a blank label to a major tick, specify an empty character vector for that tick's corresponding `MajorTickLabels` element.

If you specify more `MajorTickLabels` elements than `MajorTicks` elements, MATLAB ignores the extra labels.

If you specify fewer `MajorTickLabels` elements than `MajorTicks` elements, MATLAB leaves the extra ticks unlabeled.

Example: `{'high','medium', 'low'}`

`MajorTickLabelsMode` — Creation mode of major tick labels

`'auto'` (default) | `'manual'`

Creation mode of the major tick labels, specified as one of the following:

- `'auto'` — MATLAB creates a cell array of character vectors to populate `MajorTickLabels`.
- `'manual'` — You specify the `MajorTickLabels` cell array of character vectors.

Appearance

`Visible` — Visibility of knob

`'on'` (default) | `'off'`

Visibility of the knob, specified as `'on'` or `'off'`. The `Visible` property determines whether the knob is displayed on the screen. If the `Visible` property is set to `'off'`, the entire knob is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of knob

`[100 100 60 60]` (default) | `[left bottom width height]`

Location and size of the knob, excluding tick marks and labels, specified as the vector, `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the knob
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the knob
`width`	Distance between the right and left outer edges of the knob, excluding tick marks and labels
`height`	Distance between the top and bottom outer edges of the knob, excluding tick marks and labels

All measurements are in pixel units. Due to aspect ratio constraints, you cannot change the knob height and width independently of one another. To increase the knob size, set width and height using `Position(3:4) = [width height]`.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 200 60 60`

`InnerPosition` — Inner location and size of knob

`[100 100 60 60]` (default) | `[left bottom width height]`

Inner location and size of the knob, excluding tick marks and tick labels, specified as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of knob

`[73 80 115 105]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of knob, including tick marks and tick labels, specified as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when knob value changes

`''` (default) | function handle | cell array | character vector

Code to execute when knob value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the knob. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the knob. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of knob after app user's most recent interaction with it.
`PreviousValue`	Value of knob before app user's most recent interaction with it.
`Source`	Component that executes the callback.
`EventName`	`'ValueChanged'`

`ValueChangingFcn` — Code to execute as the knob value changes

`''` (default) | function handle | cell array | character vector

Code to execute as the knob value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the knob. MATLAB passes this information in a `ValueChangingData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example,

`event.Value` returns the current value of the knob. The `ValueChangingData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangingData` object.

Property	Value
`Value`	Current value of the knob as the app user is interacting with it.
`Source`	Component that executes the callback.
`EventName`	`'ValueChanging'`

The `Value` property of the `Knob` object is not updated until the app user releases the knob. Therefore, to get the knob values as the knob is being turned, your code must get the `Value` property of the `ValueChangingData` object.

The callback executes as follows:

- If the app user clicks the knob value, the callback executes once. For example, if the knob is on 1.0, and the app user single-clicks 1.1, the callback executes.
- If the app user clicks and drags the knob to a new position, the callback executes repeatedly. For example, if the knob value is 1.0, and the app user clicks, holds, and drags to value 10.0, the callback executes multiple times until the app user releases the knob.

If the `Value` property changes programmatically, then the callback does not execute.

`Enable` — Operational state of knob

`'on'` (default) | `'off'`

Operational state of the knob, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the app user can turn the knob.
- If you set this property to `'off'`, then the appearance of the knob appears dimmed, indicating that the app user cannot turn the knob and it will not trigger a callback.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

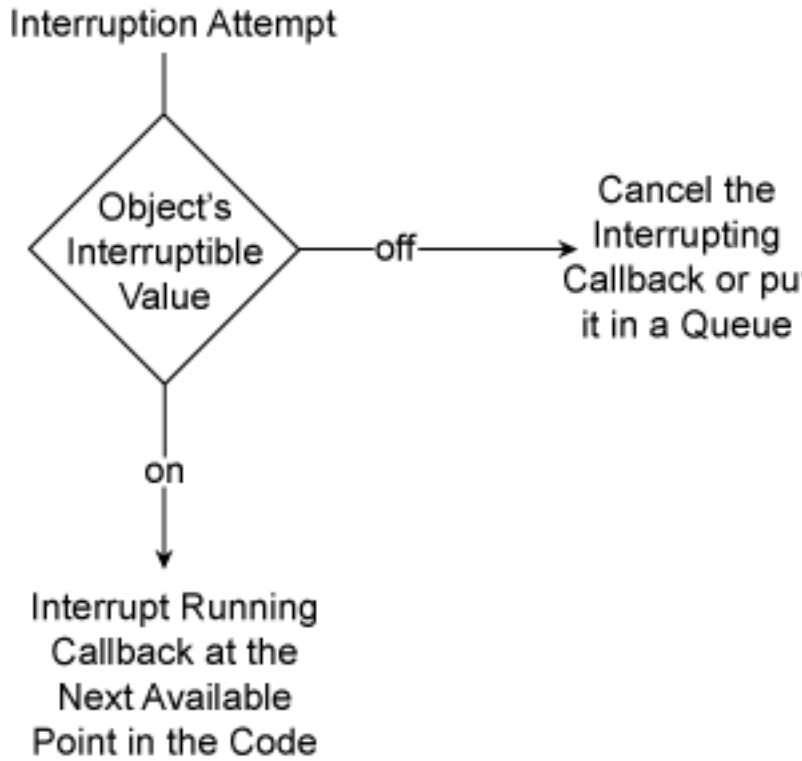

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uiknob'`

This property is read-only.

Type of graphics object, returned as `'uiknob'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'myknob'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uiknob`

Introduced in R2016a

Label Properties

(App Designer) Control label appearance

Compatibility

Valid for labels created with App Designer or the `uibutton` function. For labels created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

Labels are app components that use text to identify other components or specify the purpose of those other components. To modify aspects of a label, change the property values. Use dot notation to refer to a particular object and property:

```
f = uifigure;
l = uilabel(f);
l.Text = 'Sum:';
txt = l.Text;
```

Appearance

`Text` — Label text
`'Label'` (default) | character vector | cell array of character vectors

Label text, specified as a character vector or a cell array of character vectors. Use a cell array of character vectors to specify a multiline label.

Alternatively, use the `sprintf` function to create formatted text containing line breaks and other special characters.

```
text = sprintf('%s\n%s','Line 1','Line 2');
label = uilabel('Text',text,'Position',[100 100 100 32]);
```

Line 1
Line 2

If you specify text as a character vector without using `sprintf`, MATLAB will not automatically interpret control sequences like "\n".

```
text = 'Line 1\nLine2'
label = uilabel('Text',text,'Position',[100 100 100 32])
```

Line 1\nLine2

Example: `'Threshold'`

Example: `{'Threshold' 'Value'}`

`HorizontalAlignment` — Horizontal alignment of text

`'left'` (default) | `'right'` | `'center'`

Horizontal alignment of the text, specified as:

- `'right'` — Text aligns on the right side of the area specified by the `Position` property.
- `'left'` — Text aligns on the left side of the area specified by the `Position` property.
- `'center'`— Text centers horizontally in the area specified by the `Position` property.

Aligning label text is useful when the text spans multiple lines.

`VerticalAlignment` — Vertical alignment of text

`'top'` (default) | `'bottom'` | `'center'`

Vertical alignment of the text, specified as one of the following:

- `'top'` — Text aligns on the top of the area specified by the `Position` property.
- `'bottom'` — Text aligns on the bottom of the area specified by the `Position` property.
- `'center'` — Text centers vertically in the area specified by the `Position` property.

Aligning label text is useful when the text spans multiple lines.

`BackgroundColor` — Background color

`'none'` (default) | RGB triplet | short name | long name

Background color, specified as `'none'`, an RGB triplet, a short name, or a long name. A value of `'none'` specifies a transparent background.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Data Types: `double` | `char`

`Visible` — Label visibility

`'on'` (default) | `'off'`

Label visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the label is displayed on the screen. If the `Visible` property is set to `'off'`, the entire label is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Label location and size

`[100 100 31 15]` (default) | `[left bottom width height]`

Label location and size, relative to the parent, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the label
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the label
`width`	Distance between the right and left outer edges of the label
`height`	Distance between the top and bottom outer edges of the label

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

All measurements are in pixel units.

Example: `[100 100 100 20]`

`InnerPosition` — Inner location and size of label

`[100 100 31 15]` (default) | `[left bottom width height]`

Inner location and size of label, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to `Position` property.

`OuterPosition` — Outer location and size of label

`[100 100 31 15]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of label, returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to `Position`.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`Enable` — Visual appearance of label

`'on'` (default) | `'off'`

Visual appearance of the label, specified as one of the following:

- `'on'` — Label appears normal

  Label

- `'off'` — Label appears dimmed

  Label

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

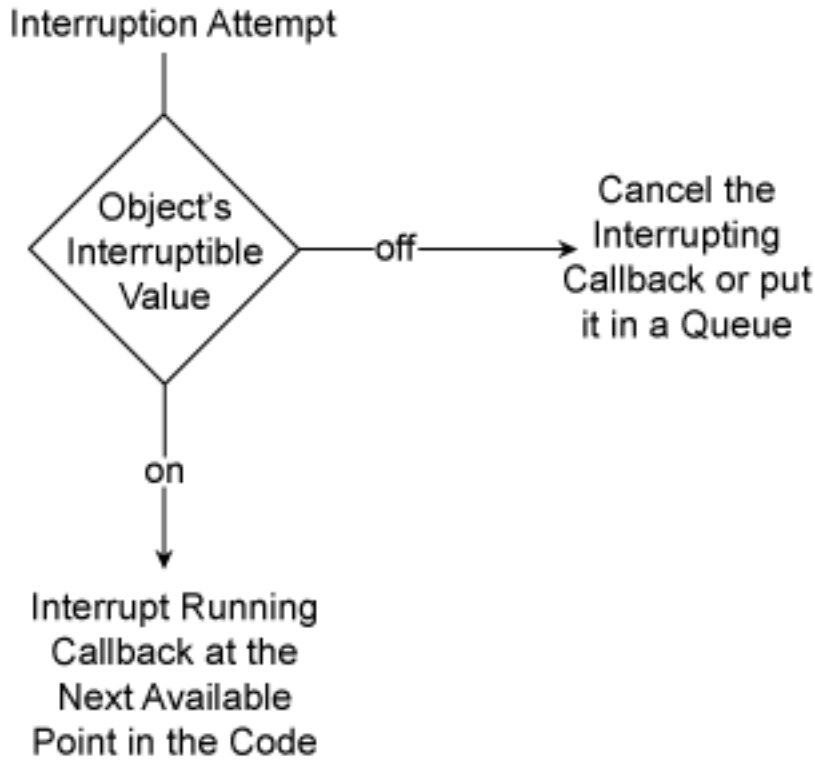

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uilabel'`

This property is read-only.

Type of graphics object, returned as `'uilabel'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'top_label'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uilabel`

Introduced in R2016a

Lamp Properties

(App Designer) Control lamp appearance

Compatibility

Valid for lamps used in App Designer or in figures created with the `uifigure` function only. Apps created with GUIDE or the `figure` function do not support lamp components.

Description

Lamps are app components that indicate state using color. Lamp properties control the appearance of a particular instance of a lamp. Use dot notation to refer to a particular object and property:

```
f = uifigure;
l = uilamp(f);
color = l.Color;
l.Color = 'red';
```

Appearance

`Color` — Color of lamp

[0 1 0] (default) | RGB triplet | short name | long name

Color of the lamp, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the lamp.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Data Types: double | char

Visible — Visibility of lamp

'on' (default) | 'off'

Visibility of the lamp, specified as 'on' or 'off'. The Visible property determines whether the lamp is displayed on the screen. If the Visible property of a lamp is set to 'off', the entire lamp is hidden, but you can still specify and access its properties.

To make your app start faster, set the Visible property of all components that do not need to appear at startup to 'off'.

Location and Size

Position — Location and size of lamp

[100 100 20 20] (default) | [left bottom width height]

Location and size of the lamp, specified as the vector [left bottom width height]. This table describes each element in the vector.

Element	Description
left	Distance from the inner left edge of the parent container to the outer left edge of the lamp
bottom	Distance from the inner bottom edge of the parent container to the outer bottom edge of the lamp
width	Distance between the right and left outer edges of the lamp

Element	Description
`height`	Distance between the top and bottom outer edges of the lamp

All measurements are in pixel units.

Due to aspect ratio constraints, you cannot change the lamp height and width independently of one another.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 200 20 20]`

`InnerPosition` — Inner location and size of lamp

`[100 100 20 20]` (default) | `[left bottom width height]`

Inner location and size of the lamp, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of lamp

`[100 100 20 20]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the lamp, returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Interactive Control

`Enable` — Operational state of the lamp

`'on'` (default) | `'off'`

Operational state of the lamp, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the lamp appears bright, indicating that the lamp is operational.
- If you set this property to `'off'`, then the lamp appears dimmed.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

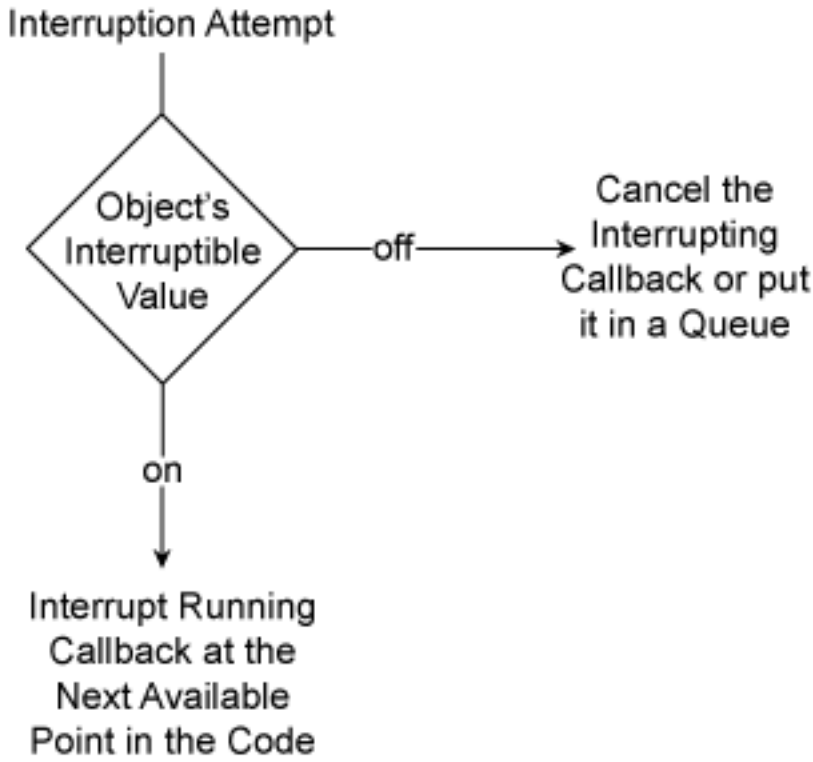

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose

callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uilamp'`

This property is read-only.

Type of graphics object, returned as `'uilamp'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the

object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'red_lamp'`

`UserData` — Data to associate with this component
empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object
`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle
`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uilamp`

Introduced in R2016a

LinearGauge Properties

(App Designer) Control linear gauge appearance and behavior

Compatibility

Valid for linear gauges used in App Designer or in figures created with the `uifigure` function only. Apps created with GUIDE or the `figure` function do not support linear gauge components.

Description

Linear gauges are app components that represent a measurement instrument. Properties control the appearance and behavior of an instance of a linear gauge. Use dot notation to refer to a particular object and property:

```
f = uifigure;
g = uigauge(f,'linear');
val = g.Value;
g.Value = 45;
```



Value

`Value` — Location of gauge needle
0 (default) | numeric

Location of the gauge needle, specified as any numeric value.

- If the value is less than the minimum `Limits` property value, then the needle points to a location immediately before the beginning of the scale.
- If the value is more than the maximum `Limits` property value, then the needle points to a location immediately after the end of the scale.

Changing the `Limits` property value has no effect on the `Value` property setting.

Example: 60

`Limits` — Minimum and maximum gauge scale values

[0 100] (default) | two-element numeric array

Minimum and maximum gauge scale values, specified as a two-element numeric array. The first value in the array must be less than the second value.

If you change `Limits` such that the `Value` property is less than the new lower limit, or more than the new upper limit, then the gauge needle points to a location off the scale.

For example, suppose `Limits` is `[0 100]` and the `Value` property is 20. If the `Limits` changes to `[50 100]`, then the needle points to a location off the scale, slightly less than 50.

Tick Values and Labels

`MajorTicks` — Major tick mark values

[0 20 40 60 80 100] (default) | 1-by-n numeric array

Major tick mark values, specified as a 1-by-n numeric array. Any array value that falls outside the `Limits` property value is not displayed. MATLAB removes duplicate array values.

Setting the `MajorTicks` property value sets the `MajorTicksMode` property value to `'manual'`.

`MajorTicksMode` — Major tick creation mode

`'auto'` (default) | `'manual'`

Major tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of major ticks.
- `'manual'` — You specify the `MajorTicks` value array.

`MinorTicks` — Minor tick values

[0:4:100] (default) | numeric array

Minor tick values, specified as a numeric array. Any array value that falls outside the `Limits` property value is not displayed on the gauge. If a minor tick falls on

the same value as a major tick, only the major tick is displayed. MATLAB removes duplicate `MinorTicks` element values. Setting the `MinorTicks` property value sets the `MinorTicksMode` property value to `'manual'`.

To exclude minor ticks from the gauge, specify an empty array.

`MinorTicksMode` — Minor tick creation mode

`'auto'` (default) | `'manual'`

Minor tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of minor ticks. MATLAB does not generate minor ticks for major ticks that are beyond scale limits. If the `Limits` property value changes, then MATLAB updates minor ticks to populate the full scale range (the `MinorTicks` property is updated accordingly).

- `'manual'` — You specify the `MinorTicks` property numeric array. The `MinorTicks` property value does not change size or content on its own.

`MajorTickLabels` — Labels on each major tick mark

`{'0','20','40','60','80','100'}` (default) | cell array of character vectors

Labels on each major tick mark, specified as a cell array of character vectors. MATLAB uses each element as the label for the major tick marks specified in the `MajorTicks` property.

Setting `MajorTickLabels` changes the `MajorTickLabelsMode` value to `'manual'`.

- If you specify more `MajorTickLabels` elements than `MajorTicks` elements, then MATLAB ignores the extra labels.
- If you specify fewer `MajorTickLabels` elements than `MajorTicks` elements, then MATLAB leaves the extra ticks unlabeled.

To create a blank label to a major tick, specify an empty character vector for that tick's corresponding `MajorTickLabels` element.

Example: `{'100','80','60','40','20','0'}`

Example: `{'Min','Max'}`

`MajorTickLabelsMode` — Creation mode of major tick labels

`'auto'` (default) | `'manual'`

Creation mode of the major tick labels, specified as one of the following:

- `'auto'` — MATLAB creates a cell array of character vectors to populate `MajorTickLabels`.
- `'manual'` — You specify the `MajorTickLabels` cell array of character vectors.

Scale Colors

`ScaleColors` — Colors that appear on gauge scale

[ ] (default) | RGB triplet | predefined color name | 1-by-n cell array

Colors that appear on the gauge scale, specified as one of the following:

- n-by-3 array of RGB values, where each element is a valid RGB value between 0 and 1.
- 1-by-n cell array, where each element is a color name or an RGB triplet. The cell array can contain a mix of RGB triplets and color names.

  MATLAB stores and returns all color names and RGB triplets as an n-by-3 array.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`, for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Each row of the `ScaleColors` array represents the color for the ith colored scale region.

If you set the `ScaleColors` property without explicitly setting the `ScaleColorLimits` property, then MATLAB determines the `ScaleColorLimits` property value by creating n equally spaced, nonoverlapping limits that span the gauge's entire scale. For example, if the `Limits` property value is `[0 75]`, and the `ScaleColors` property value is `{'green','yellow','red'}`, then MATLAB sets `ScaleColorLimits` to `[0 25; 25 50; 50 75]`.

Similarly, if you change `Limits`, without explicitly setting `ScaleColorLimits`, then MATLAB sets the `ScaleColorLimits` property value as described in the preceding paragraph.

Example: `{'blue','green'}`

Example: `[0 .5 .2; .2 .6 0]`

Example: `{[0 .5 .2], [.2 .6 0]}`

Example: `{[0 .5 .2], 'green'}`

`ScaleColorLimits` — Colored regions of scale

[ ] (default) | array

Colored regions of the scale, specified as a n-by-2 array of numeric values. For every row in the array, the first element must be less than the second element.

When applying colors to the gauge scale, MATLAB applies the colors starting at the first row in the `ScaleColors` property value. Therefore, if two rows in `ScaleColorLimits` property value overlap, then the color applied later takes precedence.

A gauge does not display any portion of a `ScaleColorLimits` property value element that falls outside of the `Limits` property value.

If the `ScaleColors` and `ScaleColorLimits` property values are different sizes, then the gauge shows only the colors that have matching limits. For example, if the `ScaleColors` property value has three rows, but the `ScaleColorLimits` property value has only two rows, then the gauge displays the first two color/limit pairs only.

Example: [10 20; 20 30]

Appearance

`Orientation` — Layout position of gauge

`'horizontal'` (default) | `'vertical'`

Layout position of gauge, specified as `'horizontal'` or `'vertical'`.

`BackgroundColor` — Background color

`[1 1 1]` (default) | RGB triplet | short name | long name

Background color of the gauge, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the gauge.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`Visible` — Visibility of gauge

`'on'` (default) | `'off'`

Visibility of the gauge, specified as `'on'` or `'off'`. The `Visible` property determines whether the gauge is displayed on the screen. If the `Visible` property is set to `'off'`, then the entire gauge is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Gauge location and size

`[100 100 120 40]` (default) | `[left bottom width height]`

Gauge location and sizet, specified as the vector, `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the gauge
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the gauge
`width`	Distance between the right and left outer edges of the gauge
`height`	Distance between the top and bottom outer edges of the gauge

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 20`

`InnerPosition` — Inner location and size of gauge

`[100 100 120 40]` (default) | `[left bottom width height]`

Inner location and size of the gauge, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of gauge

`[100 100 120 40]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the gauge, returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`

Long Name	Short Name	RGB Triplet
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.4 0.6 0.7]

FontWeight — Font weight
'normal' (default) | 'bold'

Font weight, specified as one of these values:

- 'normal' — Default weight as defined by the particular font
- 'bold' — Thicker character outlines than 'normal'

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

FontAngle — Character slant
'normal' (default) | 'italic'

Character slant, specified as 'normal' or 'italic'. Setting this property to italic selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

Enable — Operational state of gauge
'on' (default) | 'off'

Operational state of gauge, specified as 'on' or 'off'.

- If you set this property to 'on', then the appearance of the gauge indicates that the gauge is operational.
- If you set this property to 'off', then the appearance of the gauge appears dimmed, indicating that the gauge is not operational.

Callback Execution Control

Interruptible — Callback interruption
'on' (default) | 'off'

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

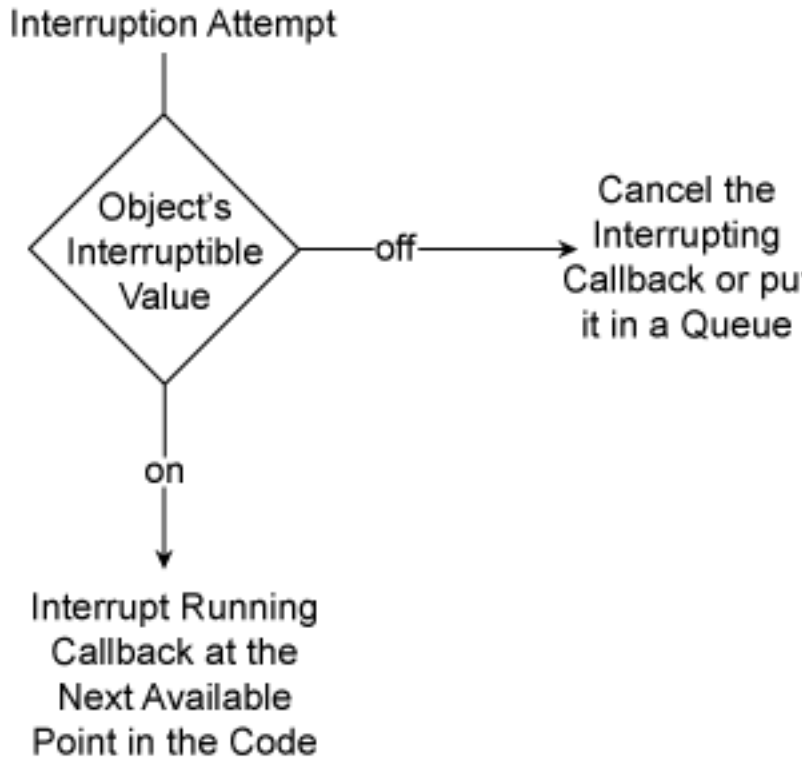

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uilineargauge'`

This property is read-only.

Type of graphics object, returned as `'uilineargauge'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'pressure_gauge'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle
`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions
`appdesigner` | `uifigure` | `uigauge`

Introduced in R2016a

ListBox Properties

(App Designer) Control list box appearance and behavior

Compatibility

Valid for list boxes created with App Designer or the `uibutton` function. For list boxes created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

List boxes are app components that display a list of items from which the app user can select one or more items. Typically, list boxes generate an action when one or more items are selected. Properties control the appearance and behavior of a list box. Use dot notation to refer to a particular object and property:

```
f = uifigure;
l = uilistbox(f);
selection = l.Value;
l.Value = 'Item 3';
```



Value

`Value` — List box selection
`'Item 1'` (default) | `Items` value | `ItemsData` value | `{}`

List box selection, specified as an element from the `Items` property, an element from the `ItemsData` property, or an empty cell array. The default list box selection is the first element of the `Items` array.

Specify an element from the `Items` property to list items that are not associated with any data. Specify an element from the `ItemsData` property when your list items have specific

data associated with them. To specify no selection, set the `Value` property to an empty cell array.

When the app is running, and user selects an item in the list box, the `Value` property changes. The new value depends on whether the `ItemsData` property is empty:

- If `ItemsData` is empty, then the new value is the selected element in the `Items` property.
- If `ItemsData` is not empty, then the new value is the corresponding element from the `ItemsData` property.

You can allow your users to select multiple list items by setting the `Multiselect` property to `'on'`. When the user selects multiple items, the `Value` property contains multiple values.

Programmatic Changes When `ItemsData` Is Empty

Suppose all of the following are true:

- The `Items` property value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is empty.
- The app user has the second element, `Blue`, selected in the list box.

If the `Items` value changes programmatically to `{'Pink','Blue','Aqua'}`, then the element selected before the programmatic change is an element of the updated `Items` value. In this case, the `Value` remains `'Blue'` and the list box selection remains the second list box element.

If the `Items` value changes programmatically to `{'Red','Teal','Green'}`, then the list box element selected before the programmatic change is not an element of the updated `Items` value. In this case, the `Value` becomes the first element of the `Items` value (`'Red'`) and the list box selection becomes the first list box element.

Programmatic Changes When `ItemsData` Is Not Empty

Suppose all of the following are true:

- The `Items` value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is originally `[10 20 30]`.
- The app user has the second element, `Blue`, selected in the list box.

If the `ItemsData` property changes programmatically to `[0 10 20]`, then the app user selection corresponds to an element of `ItemsData` that is the same before and after the programmatic change (20). However, 20 now corresponds to the third `Items` element. So the third list box element (Blue) is selected, even though the `Value` remains unchanged.

If the `ItemsData` property changes programmatically to `[10 100 1000]`, then the app user selection corresponds to an element of `ItemsData` that no longer exists. In this case, the `Value` becomes the first element of `ItemsData` (10) and the first list box element (Red) is selected.

Programmatic Changes Resulting in Duplicate `ItemsData` Values

Suppose all of the following are true:

- The `Items` value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is originally `[10 20 20]`.
- The app user has the first element, `'Red'`, selected in the list box before the programmatic change.

If the `Value` property changes programmatically to `20`, then the list box selection becomes the first element of `Items` that matches that value, namely, `'Blue'`.

`Items` — List box options presented to app user
`{'Item 1','Item 2', 'Item 3', 'Item 4'}` (default) | 1-by-n cell array of character vectors

List box options presented to the app user, specified as a 1-by-n cell array of character vectors. Duplicate elements are allowed. The list box displays as many options as there are elements in the `Items` property value.

`ItemsData` — Data associated with each element of the `Items` property value
empty array ([ ]) (default) | 1-by-n numeric array | 1-by-n cell array

Data associated with each element of the `Items` property value, specified as a 1-by-n numeric array or a 1-by-n cell array. Duplicate elements are allowed.

For example, if you set the `Items` value to employee names, you might set the `ItemsData` value to corresponding employee ID numbers. The `ItemsData` value is not visible to the app user.

If the number of array elements in the `ItemsData` value and the `Items` value do not match, one of the following occurs:

- When the `ItemsData` value is empty, then all the elements of the `Items` value are presented to the app user.
- When the `ItemsData` value has more elements than the `Items` value, then all the elements of the `Items` value are presented to the app user. MATLAB ignores the extra `ItemsData` elements.
- When the `ItemsData` value is not empty, but has fewer elements than the `Items` value, the only elements of the `Items` value presented to the app user are those that have a corresponding element in the `ItemsData` value.

Example: `{'One','Two','Three'}`

Example: `[10 20 30 40]`

Appearance

`BackgroundColor` — List box background color

`[1 1 1]` (default) | RGB triplet | short name | long name

List box background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the list box.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`Visible` — List box visibility

`'on'` (default) | `'off'`

List box visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the list box is displayed on the screen. If the `Visible` property is set to `'off'`, the entire list box is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of list box

`[100 100 100 74]` (default) | `[left bottom width height]`

Location and size of the list box relative to the parent container, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
left	Distance from the inner left edge of the parent container to the outer left edge of the list box

Element	Description
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the list box
`width`	Distance between the right and left outer edges of the list box
`height`	Distance between the top and bottom outer edges of the list box

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 200]`

`OuterPosition` — Outer location and size of list box

`[100 100 77 78]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of list box returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`InnerPosition` — Inner location and size of list box

`[100 100 77 78]` (default) | `[left bottom width height]`

Inner location and size of list box, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when list box selection changes

`''` (default) | function handle | cell array | character vector

Code to execute when list box selection changes, specified as a function handle, a cell array containing a function handle and additional arguments, or a character vector.

This callback function can access specific information about the user's interaction with the list box. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the list box. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of list box after app user's most recent interaction with it
`PreviousValue`	Value of list box before app user's most recent interaction with it
`Source`	Component that executes the callback

Property	Value
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` does not execute if the app user clicks the currently selected option, or if the `Value` property setting changes programmatically.

`Multiselect` — Multiple element selectability

`'off'` (default) | `'on'`

Multiple element selectability, specified as `'on'` or `'off'`.

`Enable` — Operational state of list box

`'on'` (default) | `'off'`

Operational state of list box, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the app user can change the list box value.
- If you set this property to `'off'`, then the list box appears dimmed, indicating that the app user cannot change the list box value, and that the list box will not trigger a callback.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

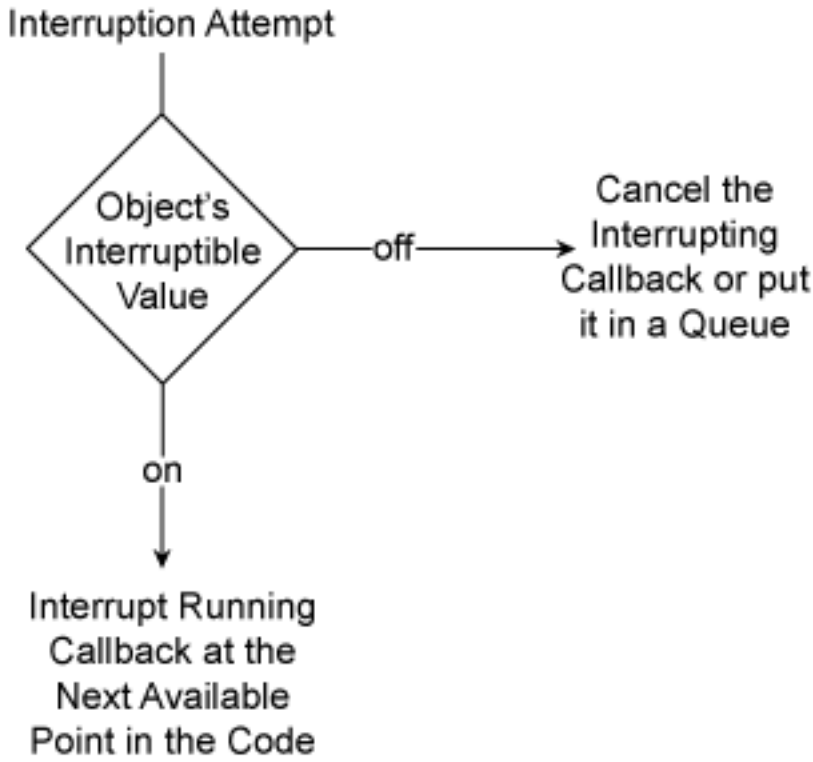

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose

callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uilistbox'`

This property is read-only.

Type of graphics object, returned as `'uilistbox'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the

object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'mylistbox'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

`appdesigner` | `scroll` | `uifigure` | `uilistbox`

Introduced in R2016a

NinetyDegreeGauge Properties

(App Designer) Control ninety-degree gauge appearance and behavior

Compatibility

Valid for ninety-degree gauges used in App Designer or in figures created with the `uifigure` function only. Apps created with GUIDE or the `figure` function do not support ninety-degree gauge components.

Description

Ninety-degree gauges are app components that represent a measurement instrument. Properties control the appearance and behavior of an instance of a ninety-degree gauge. To modify aspects of a ninety-degree gauge, change property values. Use dot notation to refer to a particular object and property:

```
f = uifigure;
ndg = uigauge(f,'ninetydegree');
val = ndg.Value;
ndg.Value = 45;
```



Value

`Value` — Location of gauge needle
0 (default) | numeric

Location of the gauge needle, specified as any numeric value.

- If the value is less than the minimum `Limits` property value, then the needle points to a location immediately before the beginning of the scale.

- If the value is more than the maximum `Limits` property value, then the needle points to a location immediately after the end of the scale.

Changing the `Limits` property value has no effect on the `Value` property setting.

Example: `60`

`Limits` — Minimum and maximum gauge scale values

[0 100] (default) | two-element numeric array

Minimum and maximum gauge scale values, specified as a two-element numeric array. The first value in the array must be less than the second value.

If you change `Limits` such that the `Value` property is less than the new lower limit, or more than the new upper limit, then the gauge needle points to a location off the scale.

For example, suppose `Limits` is `[0 100]` and the `Value` property is 20. If the `Limits` changes to `[50 100]`, then the needle points to a location off the scale, slightly less than 50.

Tick Values and Labels

`MajorTicks` — Major tick mark values

[0:25:100] (default) | array of numeric values

Major tick mark values, specified as an array of numeric values. Any array values that fall outside the `Limits` property value are not displayed on the gauge. MATLAB removes duplicate array values.

Setting the `MajorTicks` property value sets the `MajorTicksMode` property value to `'manual'`.

`MajorTicksMode` — Major tick creation mode

`'auto'` (default) | `'manual'`

Major tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of major ticks.
- `'manual'` — You specify the `MajorTicks` value array.

`MinorTicks` — Minor tick values

[0:5:100] (default) | numeric array

Minor tick values, specified as a numeric array. Any `MinorTicks` elements that fall outside `Limits` are not displayed on the gauge. If a minor tick falls on the same value as a major tick, then only the major tick is displayed. MATLAB removes duplicate `MinorTicks` element values. Setting the `MinorTicks` property value sets the `MinorTicksMode` property value to `'manual'`.

To exclude minor ticks from the gauge, specify an empty array.

`MinorTicksMode` — Minor tick creation mode

`'auto'` (default) | `'manual'`

Minor tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of minor ticks. MATLAB does not generate minor ticks for major ticks that are beyond scale limits. If the `Limits` property value changes, then MATLAB updates minor ticks to populate the full scale range (the `MinorTicks` property is updated accordingly).

- `'manual'` — You specify the `MinorTicks` property numeric array. The `MinorTicks` property value does not change size or content on its own.

`MajorTickLabels` — Major tick mark labels

`{'0','25','50','75','100'}` (default) | cell array of character vectors

Major tick mark labels, specified as cell array of character vectors. MATLAB uses each element as the label for the corresponding major tick mark.

Setting the `MajorTickLabels` property value changes the `MajorTickLabelsMode` property value to `'manual'`.

- If you specify more `MajorTickLabels` property value elements than `MajorTicks` property value elements, then MATLAB ignores the extra labels.
- If you specify fewer `MajorTickLabels` property value elements than `MajorTicks` property value elements, then MATLAB leaves the extra ticks unlabeled.

To create a blank label to a major tick, specify an empty character vector for the corresponding `MajorTickLabels` property value element.

`MajorTickLabelsMode` — Creation mode of major tick labels

`'auto'` (default) | `'manual'`

Creation mode of the major tick labels, specified as one of the following:

- `'auto'` — MATLAB creates a cell array of character vectors to populate `MajorTickLabels`.
- `'manual'` — You specify the `MajorTickLabels` cell array of character vectors.

Scale Direction and Colors

`ScaleDirection` — Direction of gauge scale

`'clockwise'` (default) | `'counterclockwise'`

Direction of the gauge scale, specified as one of the following:

- `'clockwise'` — The scale appears such that the scale tick values increase in a clockwise manner.
- `'counterclockwise'` — The scale appears such that the scale tick values increase in a counterclockwise manner.

`ScaleColors` — Colors that appear on gauge scale

[ ] (default) | RGB triplet | predefined color name | 1-by-n cell array

Colors that appear on the gauge scale, specified as one of the following:

- n-by-3 array of RGB values, where each element is a valid RGB value between 0 and 1.
- 1-by-n cell array, where each element is a color name or an RGB triplet. The cell array can contain a mix of RGB triplets and color names.

  MATLAB stores and returns all color names and RGB triplets as an n-by-3 array.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`, for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`

Long Name	Short Name	RGB Triplet
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Each row of the `ScaleColors` array represents the color for the ith colored scale region.

If you set the `ScaleColors` property without explicitly setting the `ScaleColorLimits` property, then MATLAB determines the `ScaleColorLimits` property value by creating n equally spaced, nonoverlapping limits that span the gauge's entire scale. For example, if the `Limits` property value is `[0 75]`, and the `ScaleColors` property value is `{'green','yellow','red'}`, then MATLAB sets `ScaleColorLimits` to `[0 25; 25 50; 50 75]`.

Similarly, if you change `Limits`, without explicitly setting `ScaleColorLimits`, then MATLAB sets the `ScaleColorLimits` property value as described in the preceding paragraph.

Example: `{'blue','green'}`

Example: `[0 .5 .2; .2 .6 0]`

Example: `{[0 .5 .2], [.2 .6 0]}`

Example: `{[0 .5 .2], 'green'}`

`ScaleColorLimits` — Colored regions of scale

[ ] (default) | array

Colored regions of the scale, specified as a n-by-2 array of numeric values. For every row in the array, the first element must be less than the second element.

When applying colors to the gauge scale, MATLAB applies the colors starting at the first row in the `ScaleColors` property value. Therefore, if two rows in `ScaleColorLimits` property value overlap, then the color applied later takes precedence.

A gauge does not display any portion of a `ScaleColorLimits` property value element that falls outside of the `Limits` property value.

If the `ScaleColors` and `ScaleColorLimits` property values are different sizes, then the gauge shows only the colors that have matching limits. For example, if the `ScaleColors` property value has three rows, but the `ScaleColorLimits` property value has only two rows, then the gauge displays the first two color/limit pairs only.

Example: [10 20; 20 30]

Appearance

`Orientation` — Layout position of gauge

`'northwest'` (default) | `'northeast'` | `'southwest'` | `'southeast'`

Layout position of the gauge, specified as one of the following positions:

`'northwest'`	
`'northeast'`	
`'southwest'`	
`'southeast'`	

`BackgroundColor` — Background color

`[1 1 1]` (default) | RGB triplet | short name | long name

Background color of the gauge, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the gauge.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0 0 1]

Example: 'b'

Example: 'blue'

Visible — Visibility of gauge

'on' (default) | 'off'

Visibility of the gauge, specified as 'on' or 'off'. The Visible property determines whether the gauge is displayed on the screen. If the Visible property is set to 'off', then the entire gauge is hidden, but you can still specify and access its properties.

To make your app start faster, set the Visible property of all components that do not need to appear at startup to 'off'.

Location and Size

Position — Location and size of gauge

[100 100 90 90] (default) | [left bottom width height]

Location and size of the gauge relative to the parent container, specified as the vector, [left bottom width height]. This table describes each element in the vector.

Element	Description
left	Distance from the inner left edge of the parent container to the outer left edge of an imaginary box surrounding the gauge

Element	Description
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of an imaginary box surrounding the gauge
`width`	Distance between the right and left outer edges of the gauge
`height`	Distance between the top and bottom outer edges of the gauge

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 180 180]`

`InnerPosition` — Inner location and size of gauge

`[100 100 90 90]` (default) | `[left bottom width height]`

Inner location and size of the gauge, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of gauge

`[100 100 90 90]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the gauge, returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size
12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color
`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight
`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`Enable` — Operational state of gauge

`'on'` (default) | `'off'`

Operational state of gauge, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the appearance of the gauge indicates that the gauge is operational.
- If you set this property to `'off'`, then the appearance of the gauge appears dimmed, indicating that the gauge is not operational.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running

callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

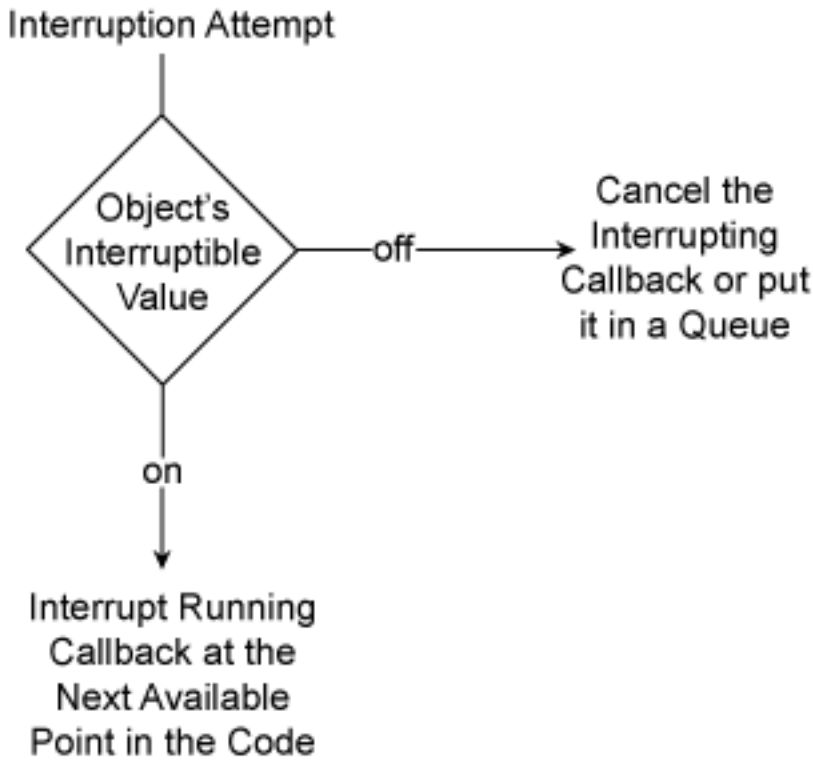

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

- If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uininetydegreegauge'`

This property is read-only.

Type of graphics object, returned as `'uininetydegreegauge'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'pressure_gauge'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions

include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uigauge`

Introduced in R2016a

NumericEditField Properties

(App Designer) Control numeric edit field appearance and behavior

Compatibility

Valid for numeric edit fields created with App Designer or the `uieditfield` function. For edit fields created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

Numeric edit fields are app components that enable the app user to enter numeric values. Typically, numeric edit fields generate an action when the app user changes the value. Properties control the appearance and behavior of a particular instance of a numeric edit field. Use dot notation to refer to a particular object and property:

```
f = uifigure;
nf = uieditfield(f,'numeric');
val = nf.Value;
nf.Value = 20;
```

Value

`Value` — Value in edit field
0 (default) | double-precision number

Value in the edit field, specified as a double-precision number.

When the app user types or changes a value in the edit field, the value is a character vector. When the app user presses the **Enter** key or changes focus, MATLAB converts the app-user-entered value to a double-precision number.

MATLAB rejects the value if:

- It cannot convert the character vector to a scalar number.

- The value is NaN, blank, or a complex number.
- The value is a mathematical expression, such as `1 + 2`.
- The value is less than the `Limits` property lower limit or greater than the upper limit.

When MATLAB rejects the app-user-entered value, a tooltip appears describing the value requirements. The edit field text immediately reverts to the previous value and no `ValueChangedFcn` runs.

Example: 10

`Limits` — Minimum and maximum edit field values

[-Inf Inf] (default) | two-element numeric array

Minimum and maximum edit field values, specified as a two-element numeric array. The first value must be less than the second value. Set array elements to `-Inf` or `Inf` to specify no minimum or no maximum, respectively.

If you change `Limits` such that `Value` is less than the new lower limit, MATLAB sets `Value` to the lowest value within the new range. For example, suppose `Limits` is `[0 100]` and `Value` is 20. If `Limits` changes to `[50 100]`, inclusive, then MATLAB sets `Value` to 50.

Similarly, if you change `Limits` such that the `Value` is greater than the new upper limit, then MATLAB sets `Value` to the new upper limit (assuming the limits are inclusive).

Example: `[-Inf 200]`

Example: `[-100 Inf]`

Example: `[-100 200]`

`LowerLimitInclusive` — Lower limit inclusiveness

`'on'` (default) | `'off'`

Lower limit inclusiveness, specified as one of the following:

- `'on'` — Value must be equal to or greater than the lower limit.
- `'off'` — Value must be greater than the lower limit.

`UpperLimitInclusive` — Upper limit inclusiveness

`'on'` (default) | `'off'`

Upper limit inclusiveness, specified as one of the following:

- `'on'` — Value must be equal to or less than the upper limit.
- `'off'` — Value must be less than the upper limit.

For example, if you want the numeric input to be between 0 and 1, excluding 0 and 1, do all of the following:

- Set the `Limits` property value to `[0 1]`.
- Set the `UpperLimitInclusive` property to `'off'`.
- Set the `LowerLimitInclusive` property to `'off'`.

`RoundFractionalValues` — Rounding of fractional values

`'off'` (default) | `'on'`

Rounding of fractional values entered by app users, specified as one of the following:

- `'on'` — MATLAB rounds the value if it results in a valid value and executes the `ValueChangedFcn` callback. If the resulting value is outside the lower or upper `Limits`, then MATLAB rounds to the nearest value that falls within the `Limits` and then executes the callback.
- `'off'` — MATLAB does not round a fractional value to a whole number.

If the `RoundFractionalValues` property value changes from `'off'` to `'on'` programmatically, then MATLAB applies these rules:

- If rounding the existing value yields an integer that lies inside the limit range specified by the `Limits` property, then MATLAB rounds up the existing value.
- If rounding the existing value yields an integer that is less than the lower limit, then MATLAB rounds up the existing value.
- If rounding the existing value yields an integer that is greater than the upper limit, then MATLAB rounds down the existing value.
- If the limits are configured such that there is no valid integer in the range, then MATLAB sets the `RoundFractionalValues` property value back to `'off'` and displays an error message.

Appearance

`BackgroundColor` — Edit field background color

`[1 1 1]` (default) | RGB triplet | short name | long name

Edit field background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the edit field.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`ValueDisplayFormat` — Numeric format

`'%11.4g'` (default) | format operator

Numeric format, specified as a format operator. MATLAB uses `num2str(NumericDisplayFormat,Value)` to convert the value of the `Value` property to a character vector.

You can mix text with format operators. For example:

```
numfield = uieditfield('numeric','ValueDisplayFormat','%.0f MS/s');
```

The resulting edit field looks like this:



When the app user clicks in the edit field, the field shows the value without the text.

For a complete list of supported format operators, see `sprintf` in the MATLAB documentation.

Example: '%.0f MS/s'

`HorizontalAlignment` — Horizontal alignment of numbers

`'right'` (default) | `'left'` | `'center'`

Horizontal alignment of numbers within the edit field, specified as:

- `'right'` — Numbers align on the right side of the edit field.
- `'left'` — Numbers align on the left side of the edit field.
- `'center'`— Numbers align in the center of the edit field.

`Visible` — Edit field visibility

`'on'` (default) | `'off'`

Edit field visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the edit field is displayed on the screen. If the `Visible` property is set to `'off'`, the edit field is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of edit field

`[100 100 100 22]` (default) | `[left bottom width height]`

Location and size of the edit field relative to the parent, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the edit field
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the edit field
`width`	Distance between the right and left outer edges of the edit field
`height`	Distance between the top and bottom outer edges of the edit field

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[150 130 100 22]`

`InnerPosition` — Inner location and size of edit field

`[100 100 100 22]` (default) | `[left bottom width height]`

Inner location and size of the edit field, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of edit field

`[100 100 100 22]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of edit field returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

FontColor — Font color

[0 0 0] (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range [0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.4 0.6 0.7]

FontWeight — Font weight

'normal' (default) | 'bold'

Font weight, specified as one of these values:

- 'normal' — Default weight as defined by the particular font
- 'bold' — Thicker character outlines than 'normal'

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

FontAngle — Character slant

'normal' (default) | 'italic'

Character slant, specified as 'normal' or 'italic'. Setting this property to italic selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when edit field value changes

`''` (default) | function handle | cell array | character vector

Code to execute when the edit field value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

The callback executes when the app user changes text in the edit field and either presses **Enter** or clicks outside the edit field.

This callback function can access specific information about the user's interaction with the edit field. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the edit field. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of edit field after app user's most recent interaction with it
`PreviousValue`	Value of edit field before app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the edit field value changes programmatically.

`Editable` — Editability of edit field

`'on'` (default) | `'off'`

Editability of the edit field, specified as `'on'` or `'off'`.

Use this property in combination with the `Enable` property value to determine if and how the component responds to app user input:

- To make the edit field editable, set both the `Enable` property and the `Editable` property values to `'on'`.

- To make the edit field uneditable, but the text easy to read, set the `Enable` property value to `'on'` and the `Editable` property value to `'off'`.



- To make the edit field uneditable and the text dimmed, set both properties to `'off'`.



`Enable` — Operational state of edit field

`'on'` (default) | `'off'`

Operational state of the edit field, specified as `'on'` or `'off'`.

Use this property in combination with the `Editable` property value to determine if and how the component responds to app user input:

- To make the edit field editable and the associated callback triggerable, set both the `Enable` property and the `Editable` property values to `'on'`.

- To make the edit field uneditable, but the text easy to read, set the `Enable` property value to `'on'` and the `Editable` property value to `'off'`.



- To make the edit field uneditable and the text dimmed, set both properties to `'off'`.



Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

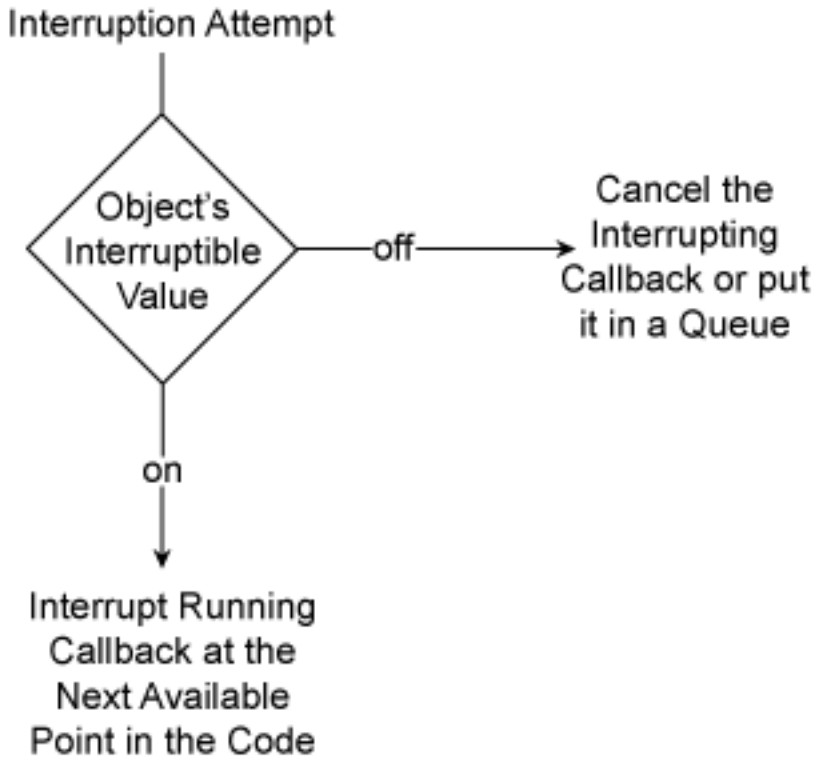

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose

callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uinumericeditfield'`

This property is read-only.

Type of graphics object, returned as `'uinumericeditfield'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the

object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'myeditfield'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uieditfield` | `uifigure`

Introduced in R2016a

Panel Properties

(App Designer) Control panel appearance

Compatibility

Valid for panels used in App Designer or figures created with the `uifigure` function. For panels used in GUIDE or apps created with the `figure` function, see Uipanel Properties.

Description

Panels are containers for grouping together UI components. Properties control the appearance and behavior of a panel. Use dot notation to refer to a particular object and property.

```
f = uifigure;
p = uipanel('Parent', f);
title = p.Title;
p.Title = 'Display Options';
```

Appearance

`Title` — Panel title

`''` (default) | character vector

Panel title, specified as a character vector.

MATLAB does not interpret a vertical slash (`'|'`) character as a line break, it displays as a vertical slash in the panel title.

If you want to specify a Unicode character, pass the Unicode decimal code to the `char` function. For example, `['Multiples of ' char(960)]` displays as `Multiples of` π

Example: `'Options'`

Example: `['Multiples of ' char(960)]`

`TitlePosition` — Location of title

`'lefttop'` (default) | `'centertop'` | `'righttop'`

Location of the title, specified as `'lefttop'`, `'centertop'`, or `'righttop'`.

`BackgroundColor` — Panel background color

`[.94 .94 .94]` (default) | RGB triplet | short name | long name

Panel background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the panel.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`

Long Name	Short Name	RGB Triplet
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`BorderType` — Panel border
`'line'` (default) | `'none'`

Panel border, specified as `'line'` or `'none'`.

`Visible` — Panel visibility
`'on'` (default) | `'off'`

Panel visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the panel is displayed on the screen. If the `Visible` property is set to `'off'`, the panel is hidden. However, you can still specify and access properties of the `Panel` object.

To make your app start faster, set the `Visible` property of all components that are not initially displayed to `'off'`.

Note Changing the `Visible` property does *not* change the values of the `Visible` properties of child components. This is true even though hiding the panel causes the child components to be hidden.

Location and Size

`Position` — Location and size of panel, including borders and title
`[left bottom width height]`

Location and size of the panel, including borders and title, specified as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the panel

Element	Description
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the panel
`width`	Distance between the right and left outer edges of the panel
`height`	Distance between the top and bottom outer edges of the panel

All measurements are in units specified by the `Units` property.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

`OuterPosition` — Location and size of panel, including borders and title

`[left bottom width height]`

Location and size of the panel, including borders and title, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` property value.

`InnerPosition` — Location and size of panel, excluding borders and title

`[left bottom width height]`

This property is read-only.

Location and size of the panel, excluding borders and title, returned as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Value	Description
`left`	Distance from the inner left edge of the parent container to the inner left edge of the panel.
`bottom`	Distance from the inner bottom edge of the parent container to the inner bottom edge of the panel.

Value	Description
`width`	Distance between the inner edges of the panel's right and left borders.
`height`	Distance between the inner edges of the panel's top and bottom borders. This distance excludes the title, if it exists.

All measurements are in units specified by the `Units` property.

Note: These are some important points to consider when using the `InnerPosition` property:

- `InnerPosition` values are affected by the presence (or absence) of a title, the font characteristics, and the `BorderType`.
- `InnerPosition` values are relative to the parent container's *drawable area*. The drawable area is the area inside the borders of the container and does not include the area occupied by the title.

`Units` — Units of measurement

`'pixels'` (default)

Units of measurement, specified as `'pixels'`.

`AutoResizeChildren` — Allow child components to resize automatically

`'on'` (default) | `'off'`

Allow child components to resize automatically, specified as `'on'` or `'off'`.

- `'on'` — Child components automatically resize when this container resizes.
- `'off'` — Child components do not resize.

The `AutoResizeChildren` property only affects direct children of a container, not children inside nested containers.

If you prefer to use your own resizing algorithm, set this property to `'off'` and create a `SizeChangedFcn` callback for the container. Be aware that the `SizeChangedFcn` callback will not execute when `AutoResizeChildren` is set to `'on'`.

Alternatively, if you want a fixed layout that does not resize, set the Resize property of the `Figure` object to `'off'`.

`SizeChangedFcn` — Size change callback function

`''` (default) | function handle | cell array | character vector

Size change callback function, specified as one of these values:

- Function handle
- Cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- Character vector that is a valid MATLAB expression. MATLAB evaluates this expression in the base workspace.

Define this callback to customize the app layout when the size of this container changes (e.g., when the user resizes the window).

Note: The `SizeChangedFcn` callback will not execute unless the `AutoResizeChildren` property of this container is set to `'off'`. In App Designer, you can make the `SizeChangedFcn` executable by clearing the **Resize components when app is resized** check box in the **UI Figure Properties** panel.

The `SizeChangedFcn` callback executes when:

- This container becomes visible for the first time.
- This container is visible while its size changes.
- This container becomes visible for the first time after its size changes. This situation occurs when the size changes while the container is invisible, and then it becomes visible later.

Other important points to consider when defining a `SizeChangedFcn` callback:

- Consider delaying the display of this container until after all the variables that the `SizeChangedFcn` uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the container, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- If your app contains nested containers, they resize from the inside out.
- To access the container that is resizing from within the `SizeChangedFcn`, refer to the source object (the first input argument in the callback) or use the `gcbo` function.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`ForegroundColor` — Font color

`[0 0 0]` (default) | RGB triplet | short name | long name

Font color, specified as an RGB triplet, short name, or long name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`FontUnits` — Font unit of measurement

`'pixels'` (default)

Font unit of measurement, specified as `'pixels'`. Distances in pixels are independent of your system resolution on Windows and Macintosh systems:

- On Windows systems, a pixel is 1/96th of an inch.
- On Macintosh systems, a pixel is 1/72nd of an inch.
- On Linux systems, the size of a pixel is determined by your system resolution.

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running

callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

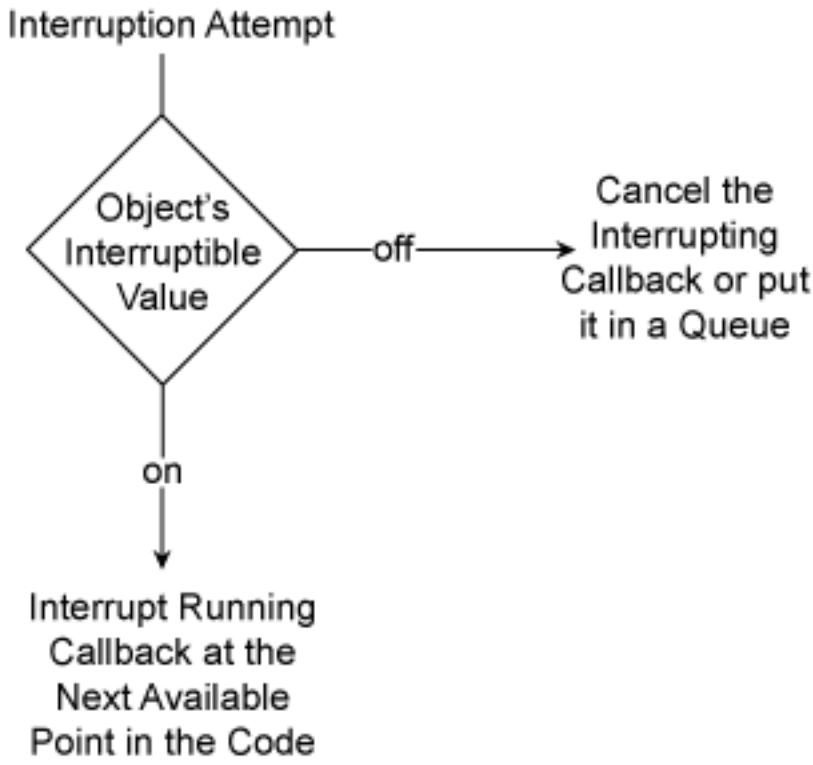

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uipanel'`

This property is read-only.

Type of graphics object, returned as `'uipanel'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'panel1'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Children

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`Children` — `Panel` children

empty `GraphicsPlaceholder` array (default) | 1-D array of component objects

`Panel` child objects, returned as an empty `GraphicsPlaceholder` or a 1-D array of component objects. The children of a `Panel` can be any component object, including another `Panel`.

You cannot add or remove child components using the `Children` property. Use this property to view the list of children or to reorder the children. The order of the child

objects in this array reflects the front-to-back stacking order of the components on the screen.

To add a child object to this list, set the `Parent` property of the child object to the `Panel` object.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uipanel`

Introduced in R2016a

RadioButton Properties

(App Designer) Control radio button appearance

Compatibility

Valid for buttons created with App Designer or the `uiradiobutton` function. For radio buttons created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

Radio buttons are app components that appear in a button group, as a set of mutually exclusive options. Typically, the button group to which the radio button belongs generates an action when the selection changes. Properties control the appearance and behavior of a particular instance of a radio button. Use dot notation to refer to a particular object and property:

```
f = uifigure;
b = uibuttongroup(f);
rb = uiradiobutton(b);
txt = rb.Text;
rb.Text = 'One';
```

Note: To specify how you want your app to respond when the app user changes a radio button selection, code the `SelectionChangedFcn` callback for the parent `ButtonGroup`.

Value

`Value` — State of radio button
1 | 0

State of radio button, specified as `1` (true) or `0` (false). Within a button group, only one button can be selected at a time. The state of the first radio button added to a button

group is 1, by default. Subsequent buttons added to the same button group have a default state of 0.

When the Value property of a RadioButton changes to 1, the Value of the property for the previously selected RadioButton changes to 0. In addition, the SelectedObject property value of the parent ButtonGroup is updated.

If you programmatically change the Value property of a RadioButton to 0, MATLAB sets the Value property of the first RadioButton *added* to the ButtonGroup to 1. If the first RadioButton added is the one for which you programmatically set the Value property to 0, then MATLAB sets the Value property for the second RadioButton added to the ButtonGroup to 1.

Note: The first RadioButton *added* to a ButtonGroup is not necessarily the first RadioButton *listed* in the Children property of the ButtonGroup.

Appearance

Text — Radio button text

'Radio Button' (default) | character vector

Radio button text, specified as a character vector.

Example: 'Steady state'

Visible — Button visibility

'on' (default) | 'off'

Button visibility, specified as 'on' or 'off'. The Visible property determines whether the button is displayed on the screen. If the Visible property of a button is set to 'off', the entire button is hidden, but you can still specify and access its properties.

To make your app start faster, set the Visible property of all components that do not need to appear at startup to 'off'.

Location and Size

Position — Radio button location and size

[10 10 91 15] (default) | [left bottom width height]

Radio button location and size, relative to the button group containing it, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the button group to the outer left edge of the radio button
`bottom`	Distance from the inner bottom edge of the button group to the outer bottom edge of the radio button
`width`	Distance between the right and left outer edges of the radio button (including text)
`height`	Distance between the top and bottom outer edges of the radio button

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[10 20 91 15]`

`InnerPosition` — Inner location and size

`[10 10 91 15]` (default) | `[left bottom width height]`

Inner location and size of the radio button, specified as `[left bottom width height]`. Position values are relative to the button group containing the button. All measurements are in pixel units. This property value is identical to `Position` for radio buttons.

`OuterPosition` — Outer location and size

`[10 10 91 15]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the radio button, returned as `[left bottom width height]`. Position values are relative to the button group containing the button. All

measurements are in pixel units. This property value is identical to `Position` for radio buttons.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`

Long Name	Short Name	RGB Triplet
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`Enable` — Operational state of button

`'on'` (default) | `'off'`

Operational state of the button, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the appearance of the button indicates that the app user can interact with it.
- If you set this property to `'off'`, then the appearance of the button appears dimmed, indicating that the app user cannot interact with it.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

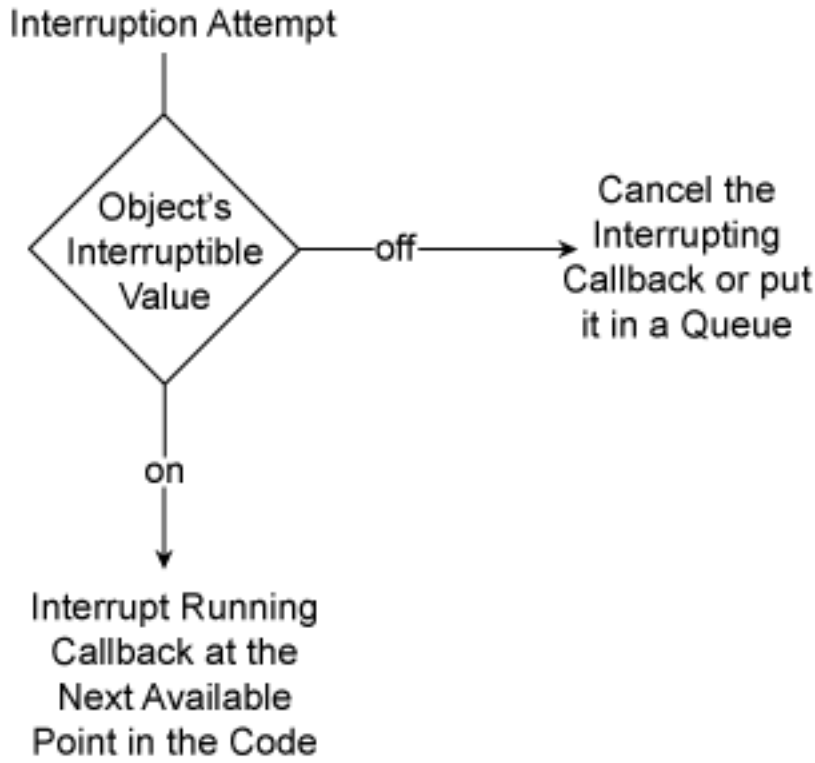

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uiradiobutton'`

This property is read-only.

Type of graphics object, returned as `'uiradiobutton'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'off_radiobutton'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uibuttongroup` | `uifigure` | `uiradiobutton`

Introduced in R2016a

RockerSwitch Properties

(App Designer) Control rocker switch appearance and behavior

Compatibility

Valid for rocker switches used in App Designer or in figures created with the `uifigure` function only. Apps created with GUIDE or the `figure` function do not support rocker switch components.

Description

Rocker switches are app components that indicate a logical state. Typically, rocker switches generate an action when the state changes. Properties control the appearance and behavior of a particular instance of a rocker switch. Use dot notation to refer to a particular object and property:

```
f = uifigure;
rs = uiswitch(f,'rocker');
val = rs.Value;
rs.Value = 'On';
```

Value

`Value` — Value of switch

`'Off'` (default) | element or elements of `Items` | element or elements of `ItemsData`

Value of switch, specified as an element of the `Items` or `ItemsData` property value.

- If `ItemsData` is empty, then `Value` is the selected element of `Items`.
- If `ItemsData` is not empty, then `Value` is the element in `ItemsData` that corresponds to the selected element of `Items`.

Programmatic Changes When `ItemsData` Is Empty

Suppose all of the following are true:

- The `Items` property value is `{'Off','On'}`.
- The `ItemsData` value is empty.
- The app user sets the switch to `On` before the programmatic change.

If the `Items` property value changes programmatically to `{'Stop','On'}`, then the element selected before the programmatic change is an element of the updated `Items` property value. In this case, the `Value` remains `'On'` and the switch selection remains **On**.

If the `Items` property value changes programmatically to `{'Stop','Run'}`, then the switch element selected before the programmatic change is not an element of the updated `Items` property value. In this case, the `Value` becomes the first element of the `Items` property value (`'Stop'`) and the switch selection is **Stop**.

Programmatic Changes When `ItemsData` Is Not Empty

Suppose all of the following are true:

- The `Items` value is `{'Off','On'}`.
- The `ItemsData` value is originally `[0 1]`.
- The app user sets the switch to `On` before the programmatic change.

If the `ItemsData` property changes programmatically to `[1 0]`, then the app user selection corresponds to an element of `ItemsData` that is the same before and after the programmatic change (`1`). However, `1` now corresponds to the other `Items` element. So the switch flips, even though `Value` remains unchanged.

If the `ItemsData` property changes programmatically to `[10 100]`, then the app user selection corresponds to an element of `ItemsData` that no longer exists. In this case, `Value` becomes the first element of `ItemsData` (`10`) and the switch selection is **Off**.

`Items` — Options for switch

`{'Off','On'}` (default) | 1-by-2 cell array of character vectors

Options for the switch, specified as a 1-by-2 cell array of character vectors. Duplicate elements are allowed.

`ItemsData` — Data associated with each element of `Items`

empty array ([ ]) (default) | 1-by-2 numeric array | 1-by-2 cell array

Data associated with each element of the `Items` property value, specified as a 1-by-2 numeric array or a 1-by-2 cell array. Duplicate elements are allowed.

For example, if you set the `Items` value to `{'Freezing','Boiling'}`, then you might set the `ItemsData` value to corresponding temperatures in degrees Celsius, `[0,100]`. The `ItemsData` value is not visible to the app user.

Example: `{'One' 'Two'}`

Example: `[10 20]`

Appearance

`Orientation` — Layout position of switch

`'vertical'` (default) | `'horizontal'`

Layout position of the switch, specified as `'vertical'` or `'horizontal'`.

`Visible` — Visibility of switch

`'on'` (default) | `'off'`

Visibility of the switch, specified as `'on'` or `'off'`. The `Visible` property determines whether the switch is displayed on the screen. If the `Visible` property is set to `'off'`, the entire switch is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of switch

`[100 100 20 45]` (default) | `[left bottom width height]`

Location and size of the switch, excluding state marks and labels, specified as the vector, `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the switch

Element	Description
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the switch
`width`	Distance between the right and left outer edges of the switch, excluding labels
`height`	Distance between the top and bottom outer edges of the switch, excluding labels

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 40 90]`

`InnerPosition` — Inner location and size of switch

`[100 100 20 45]` (default) | `[left bottom width height]`

Inner location and size of the switch, excluding state marks and state labels, specified as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of switch

`[100 80 20 85]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the switch, including state marks and state labels, returned as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size
12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color
`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight
`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when switch state changes

`''` (default) | function handle | cell array | character vector

Code to execute when switch state changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace

The app user can change the switch state by doing either of the following:

- Clicking and releasing the mouse button anywhere on the switch (including the state labels)
- Clicking on the switch, dragging, and then releasing the mouse button while still on the switch.

This callback function can access specific information about the user's interaction with the switch. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the switch. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of switch after the app user's most recent interaction with it
`PreviousValue`	Value of switch before the app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the app user clicks the currently selected option, or if the `Value` property setting changes programmatically.

`Enable` — Operational state of switch

`'on'` (default) | `'off'`

Operational state of switch, specified as `'on'` or `'off'`.

If you set this property to `'on'`, the app user can slide the switch.

If you set this property to `'off'`, the switch appears dimmed, indicating that the app user cannot slide the switch and it will not trigger a callback.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running

callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

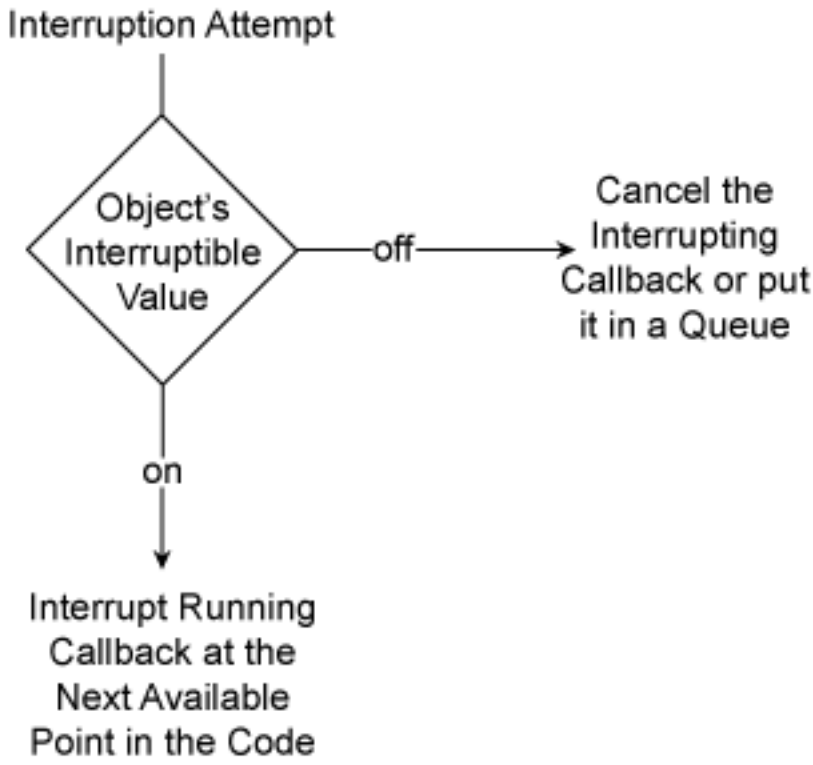

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uirockerswitch'`

This property is read-only.

Type of graphics object, returned as `'uirockerswitch'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'myswitch'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions

include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uiswitch`

Introduced in R2016a

scroll

(App Designer) Scroll list box item or location into view

Compatibility

Use only with list boxes contained in figures created with App Designer or the `uifigure` function.

Syntax

```
scroll(listbox,item)
scroll(listbox,itemdata)
scroll(listbox,location)
```

Description

`scroll(listbox,item)` positions the list box scroll bar to bring the specified item into view.

`scroll(listbox,itemdata)` positions the list box scroll bar to bring the item that corresponds to the specified `ItemsData` element in to view.

`scroll(listbox,location)` brings the specified list box location (`'top'` or `'bottom'`) in to view.

Examples

Scroll List Box to Specific Item

Create a UI figure window containing a list box populated with names.

```
fig = uifigure('Position',[680 678 300 200]);
list = uilistbox(fig, 'Position',[70 50, 150 78]);
list.Items = {'Diane Fitzsimmons', 'Naomi Becker', 'Nick Stewart',...
           'Alex Bradford', 'Caroline Eliot', 'Leslie Bond', ...
           'Aaron Silberlicht', 'Ramu Sadasiv', 'Joyce Wu',...
```

```
'Ann Shanahan'};
```

The list box is not tall enough to display all the names at once, so MATLAB automatically adds a scroll bar.

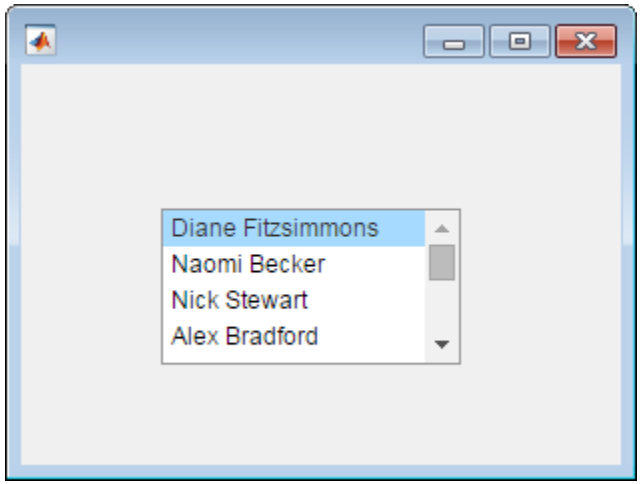

Programmatically scroll "Caroline Eliot" into view by passing that character vector to the `scroll` function.

```
scroll(list,'Caroline Eliot');
```

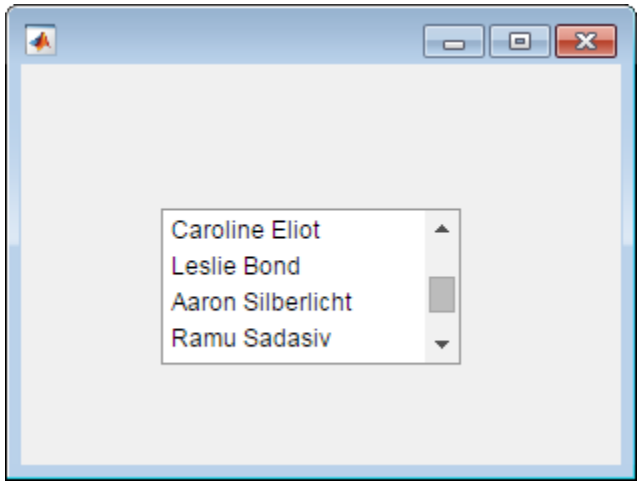

Notice that “Caroline Eliot” is in view, but *not* selected.

To select the item, set the `Value` property to `'Caroline Eliot'`.

```
list.Value = 'Caroline Eliot';
```

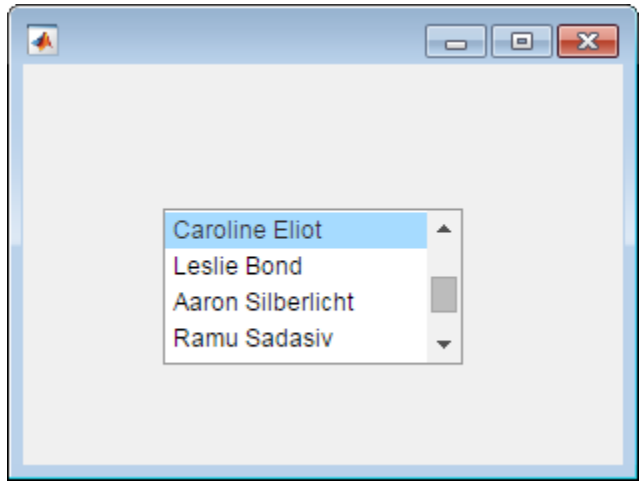

Scroll List Box to Item Associated with Specific Data

Create a UI figure window containing a list box populated with names. Specify a value for the `ItemsData` property so that each name is associated with a number. (For example, if the names belong to employees, each number might represent an employee ID).

```
fig = uifigure('Position',[680 678 300 200]);
list = uilistbox(fig, 'Position',[70 50, 150 78]);
list.Items = {'Diane Fitzsimmons', 'Naomi Becker', 'Nick Stewart',...
            'Alex Bradford', 'Caroline Eliot', 'Leslie Bond', ...
            'Aaron Silberlicht', 'Ramu Sadasiv', 'Joyce Wu',...
 'Ann Shanahan'};
list.ItemsData = [1 2 3 4 5 6 7 8 9 10];
```

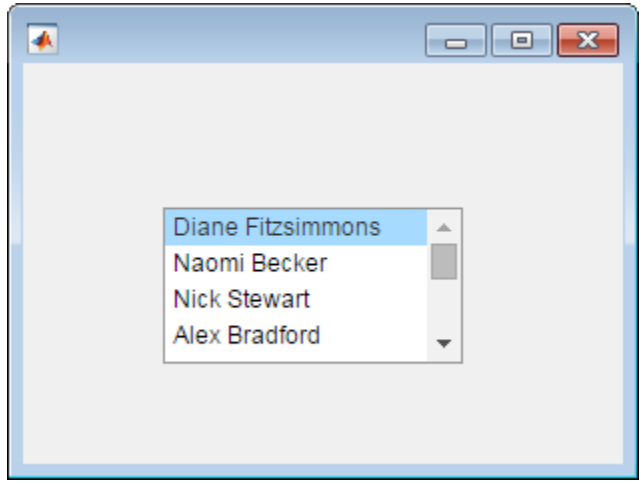

Programmatically scroll “Caroline Eliot” into view by specifying the `ItemsData` element, `5`, which corresponds to that name.

```
scroll(list,5);
```

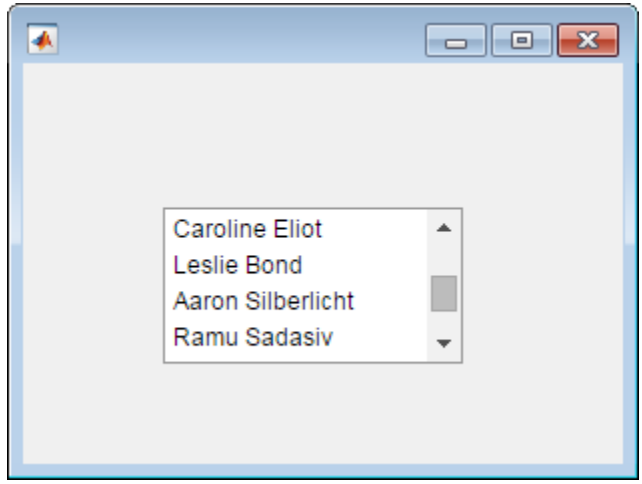

Scroll to Bottom of List Box

Create an UI figure containing a list box populated with names.

```
fig = uifigure('Position',[680 678 300 200]);
list = uilistbox(fig, 'Position',[70 50, 150 78]);
list.Items = {'Diane Fitzsimmons', 'Naomi Becker', 'Nick Stewart',...
            'Alex Bradford','Caroline Eliot','Leslie Bond', ...
            'Aaron Silberlicht','Ramu Sadasiv','Joyce Wu',...
            'Ann Shannahan'};
```

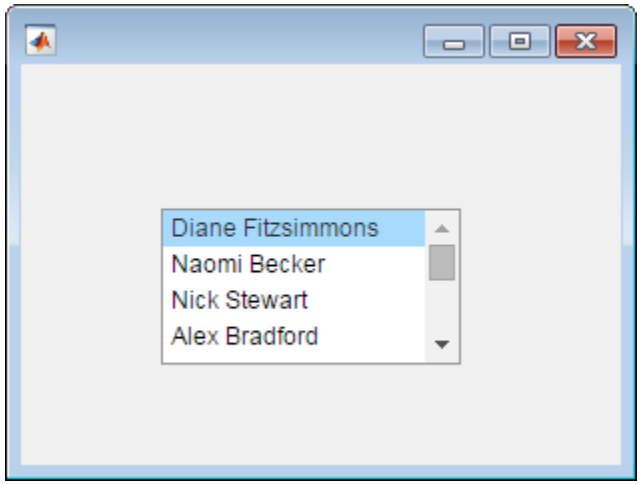

Programmatically scroll to the bottom of the list.

```
scroll(list,'bottom');
```

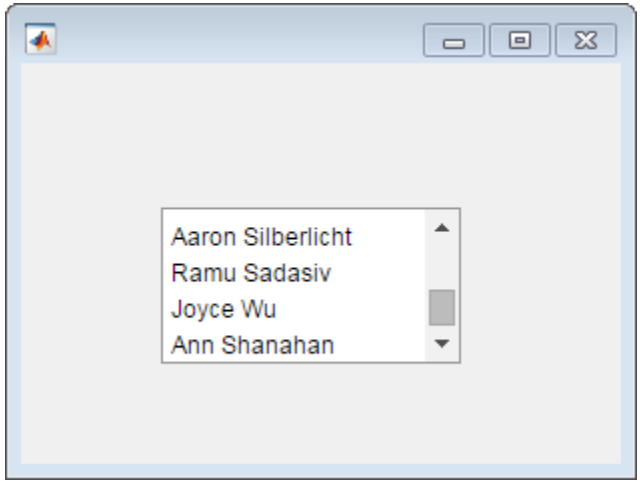

Input Arguments

`listbox` — Target list box
`ListBox` object

Target list box, specified as a `ListBox` object returned by the `uilistbox` function.

`item` — List box item to scroll into view
element of `Items` property value

List box item to scroll into view, specified as an element of the `Items` property value.

`itemdata` — List box item to scroll into view
element of `ItemsData` property value

List box item to scroll into view, specified as an element of the `ItemsData` property value.

`location` — List box location to scroll into view
`'top'` | `'bottom'`

List box location to scroll into view, specified as `'top'` or `'bottom'`.

If one of the elements in the`Items` property is `'top'` or `'bottom'`, then the item takes precedence over the location as the `scroll` target.

See Also

See Also

Functions
`appdesigner` | `uilistbox`

Properties
ListBox Properties

Introduced in R2016a

SemicircularGauge Properties

(App Designer) Control semicircular gauge appearance

Compatibility

Valid for semicircular gauges used in App Designer or in figures created with the `uifigure` function only. Apps created with GUIDE or the `figure` function do not support semicircular gauge components.

Description

Semicircular gauges are app components that represent a measurement instrument. Properties control the appearance and behavior of a semicircular gauge. Use dot notation to refer to a particular object and property:

```
f = uifigure;
sg = uigauge(f,'semicircular');
val = sg.Value;
sg.Value = 45;
```



Value

`Value` — Location of gauge needle
0 (default) | numeric

Location of the gauge needle, specified as any numeric value.

- If the value is less than the minimum `Limits` property value, then the needle points to a location immediately before the beginning of the scale.
- If the value is more than the maximum `Limits` property value, then the needle points to a location immediately after the end of the scale.

Changing the `Limits` property value has no effect on the `Value` property setting.

Example: `60`

`Limits` — Minimum and maximum gauge scale values

[0 100] (default) | two-element numeric array

Minimum and maximum gauge scale values, specified as a two-element numeric array. The first value in the array must be less than the second value.

If you change `Limits` such that the `Value` property is less than the new lower limit, or more than the new upper limit, then the gauge needle points to a location off the scale.

For example, suppose `Limits` is `[0 100]` and the `Value` property is 20. If the `Limits` changes to `[50 100]`, then the needle points to a location off the scale, slightly less than 50.

Tick Values and Labels

`MajorTicks` — Major tick mark values

[0 20 40 60 80 100] (default) | 1-by-n numeric array

Major tick mark values, specified as a 1-by-n numeric array. Any array value that falls outside the `Limits` property value is not displayed. MATLAB removes duplicate array values.

Setting the `MajorTicks` property value sets the `MajorTicksMode` property value to `'manual'`.

`MajorTicksMode` — Major tick creation mode

`'auto'` (default) | `'manual'`

Major tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of major ticks.
- `'manual'` — You specify the `MajorTicks` value array.

`MinorTicks` — Minor tick values

[0:4:100] (default) | numeric array

Minor tick values, specified as a numeric array. Any array value that falls outside the `Limits` property value is not displayed on the gauge. If a minor tick falls on the same value as a major tick, only the major tick is displayed. MATLAB removes

duplicate `MinorTicks` element values. Setting the `MinorTicks` property value sets the `MinorTicksMode` property value to `'manual'`.

To exclude minor ticks from the gauge, specify an empty array.

`MinorTicksMode` — Minor tick creation mode
`'auto'` (default) | `'manual'`

Minor tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of minor ticks. MATLAB does not generate minor ticks for major ticks that are beyond scale limits. If the `Limits` property value changes, then MATLAB updates minor ticks to populate the full scale range (the `MinorTicks` property is updated accordingly).

- `'manual'` — You specify the `MinorTicks` property numeric array. The `MinorTicks` property value does not change size or content on its own.

`MajorTickLabels` — Labels on each major tick mark
`{'0','20','40','60','80','100'}` (default) | cell array of character vectors

Labels on each major tick mark, specified as a cell array of character vectors. MATLAB uses each element as the label for the major tick marks specified in the `MajorTicks` property.

Setting `MajorTickLabels` changes the `MajorTickLabelsMode` value to `'manual'`.

- If you specify more `MajorTickLabels` elements than `MajorTicks` elements, then MATLAB ignores the extra labels.
- If you specify fewer `MajorTickLabels` elements than `MajorTicks` elements, then MATLAB leaves the extra ticks unlabeled.

To create a blank label to a major tick, specify an empty character vector for that tick's corresponding `MajorTickLabels` element.

Example: `{'100','80','60','40','20','0'}`

Example: `{'Min','Max'}`

`MajorTickLabelsMode` — Creation mode of major tick labels
`'auto'` (default) | `'manual'`

Creation mode of the major tick labels, specified as one of the following:

- `'auto'` — MATLAB creates a cell array of character vectors to populate `MajorTickLabels`.
- `'manual'` — You specify the `MajorTickLabels` cell array of character vectors.

Scale Direction and Color

`ScaleDirection` — Direction of gauge scale

`'clockwise'` (default) | `'counterclockwise'`

Direction of the gauge scale, specified as one of the following:

- `'clockwise'` — The scale appears such that the scale tick values increase in a clockwise manner.
- `'counterclockwise'` — The scale appears such that the scale tick values increase in a counterclockwise manner.

`ScaleColors` — Colors that appear on gauge scale

[ ] (default) | RGB triplet | predefined color name | 1-by-n cell array

Colors that appear on the gauge scale, specified as one of the following:

- n-by-3 array of RGB values, where each element is a valid RGB value between 0 and 1.
- 1-by-n cell array, where each element is a color name or an RGB triplet. The cell array can contain a mix of RGB triplets and color names.

  MATLAB stores and returns all color names and RGB triplets as an n-by-3 array.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`, for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`

Long Name	Short Name	RGB Triplet
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Each row of the `ScaleColors` array represents the color for the ith colored scale region.

If you set the `ScaleColors` property without explicitly setting the `ScaleColorLimits` property, then MATLAB determines the `ScaleColorLimits` property value by creating n equally spaced, nonoverlapping limits that span the gauge's entire scale. For example, if the `Limits` property value is `[0 75]`, and the `ScaleColors` property value is `{'green','yellow','red'}`, then MATLAB sets `ScaleColorLimits` to `[0 25; 25 50; 50 75]`.

Similarly, if you change `Limits`, without explicitly setting `ScaleColorLimits`, then MATLAB sets the `ScaleColorLimits` property value as described in the preceding paragraph.

Example: `{'blue','green'}`

Example: `[0 .5 .2; .2 .6 0]`

Example: `{[0 .5 .2], [.2 .6 0]}`

Example: `{[0 .5 .2], 'green'}`

`ScaleColorLimits` — Colored regions of scale

[ ] (default) | array

Colored regions of the scale, specified as a n-by-2 array of numeric values. For every row in the array, the first element must be less than the second element.

When applying colors to the gauge scale, MATLAB applies the colors starting at the first row in the `ScaleColors` property value. Therefore, if two rows in `ScaleColorLimits` property value overlap, then the color applied later takes precedence.

A gauge does not display any portion of a `ScaleColorLimits` property value element that falls outside of the `Limits` property value.

If the `ScaleColors` and `ScaleColorLimits` property values are different sizes, then the gauge shows only the colors that have matching limits. For example, if the

`ScaleColors` property value has three rows, but the `ScaleColorLimits` property value has only two rows, then the gauge displays the first two color/limit pairs only.

Example: [10 20; 20 30]

Appearance

`Orientation` — Layout position of gauge

`'north'` (default) | `'south'` | `'east'` | `'west'`

Layout position of the gauge, specified as one of the following:

`'north'`	
`'south'`	
`'east'`	
`'west'`	

`BackgroundColor` — Background color

`[1 1 1]` (default) | RGB triplet | short name | long name

Background color of the gauge, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the gauge.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`Visible` — Visibility of gauge
`'on'` (default) | `'off'`

Visibility of the gauge, specified as `'on'` or `'off'`. The `Visible` property determines whether the gauge is displayed on the screen. If the `Visible` property is set to `'off'`, then the entire gauge is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of gauge
`[100 100 120 65]` (default) | `[left bottom width height]`

Location and size of the gauge relative to the parent container, specified as the vector, `[left bottom width height]`.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of an imaginary box surrounding the gauge
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of an imaginary box surrounding the gauge
`width`	Distance between the right and left outer edges of the gauge
`height`	Distance between the top and bottom outer edges of the gauge

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 20`

`InnerPosition` — Inner location and size of gauge

`[100 100 120 65]` (default) | `[left bottom width height]`

Inner location and size of the gauge, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of gauge

`[100 100 120 65]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the gauge, returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`

Long Name	Short Name	RGB Triplet
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`Enable` — Operational state of gauge

`'on'` (default) | `'off'`

Operational state of gauge, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the appearance of the gauge indicates that the gauge is operational.
- If you set this property to `'off'`, then the appearance of the gauge appears dimmed, indicating that the gauge is not operational.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

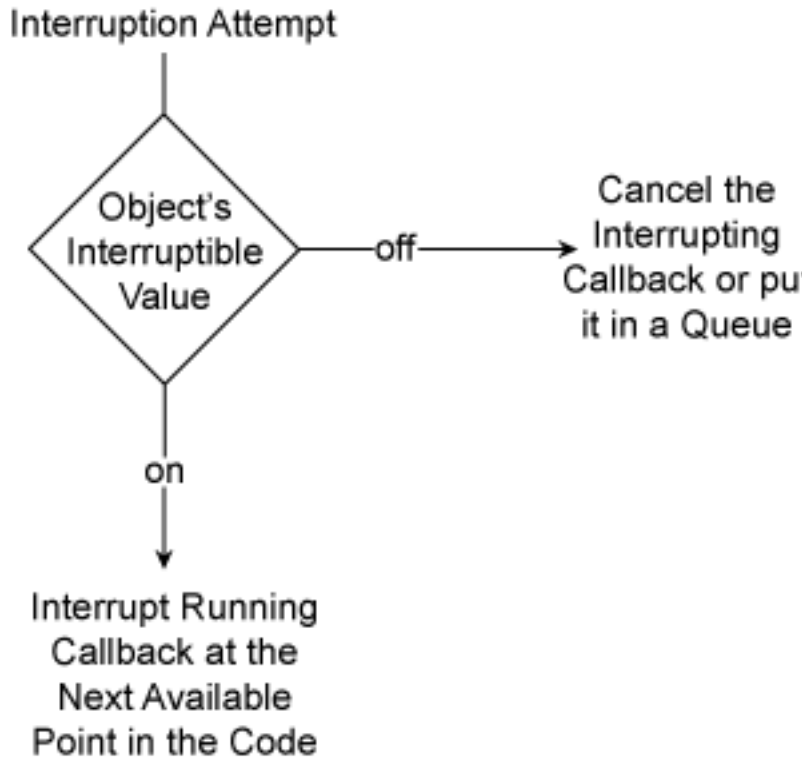

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Identifiers

`Type` — Type of graphics object

`'uisemicirculargauge'`

This property is read-only.

Type of graphics object, returned as `'uisemicirculargauge'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'pressure_gauge'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.

HandleVisibility Value	Description
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uigauge`

Introduced in R2016a

Slider Properties

(App Designer) Control slider appearance and behavior

Compatibility

Valid for sliders created with App Designer or the `uibutton` function. For sliders created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

Sliders are app components that allow the app user to select a value along a continuum. Typically, sliders generate an action when the app user changes the value. Properties control the appearance and behavior of a slider. Use dot notation to refer to a particular object and property:

```
f = uifigure;
sl = uislider(f);
val = sl.Value;
sl.Value = 20;
```



Value

`Value` — Slider value
0 (default) | numeric value

Slider value, specified as a numeric value. The numeric value must be within the range specified by the `Limits` property value.

`Limits` — Minimum and maximum slider values
[0 100] (default) | two-element numeric array

Minimum and maximum slider values, specified as a two-element numeric array. The first value must be less than the second value.

If you change `Limits` such that `Value` property is less than the new lower limit, MATLAB sets the `Value` property to the new lower limit. For example, suppose the `Limits` property is `[0 100]` and `Value` is 20. If the `Limits` changes to `[50 100]`, then MATLAB sets the `Value` property to 50.

Similarly, if you change `Limits` such that the `Value` property is greater than the new upper limit, MATLAB sets the `Value` property to the new upper limit.

Tick Values and Labels

`MajorTicks` — Major tick mark values

[0 20 40 60 80 100] (default) | 1-by-n numeric array

Major tick mark values, specified as a 1-by-n numeric array. Any array value that falls outside the `Limits` property value is not displayed. MATLAB removes duplicate array values.

Setting the `MajorTicks` property value sets the `MajorTicksMode` property value to `'manual'`.

`MajorTicksMode` — Major tick creation mode

`'auto'` (default) | `'manual'`

Major tick creation mode, specified as one of the following:

- `'auto'` — MATLAB determines the placement of major ticks.
- `'manual'` — You specify the `MajorTicks` value array.

`MinorTicks` — Minor tick mark values

`[0:4:100]` (default) | numeric vector

Minor tick mark values, specified as a numeric vector. Any `MinorTicks` elements that fall outside `Limits` are not displayed on the gauge. If a minor tick falls on the same value as a major tick, only the major tick is displayed. MATLAB removes duplicate `MinorTicks` element values. Setting the `MinorTicks` property value sets the `MinorTicksMode` property value to `'manual'`.

`MinorTicksMode` — Minor tick creation mode

`'auto'` (default) | `'manual'`

Minor tick creation mode, specified as `'auto'` or `'manual'`.

When `MinorTicksMode` is set to `'auto'`, MATLAB determines the placement of minor ticks.

`MajorTickLabels` — Labels on each major tick mark

`{'0','20','40','60','80','100'}` (default) | cell array of character vectors

Labels on each major tick mark, specified as a cell array of character vectors. MATLAB uses each element as the label for the major tick marks specified in the `MajorTicks` property.

Setting `MajorTickLabels` changes the `MajorTickLabelsMode` value to `'manual'`.

- If you specify more `MajorTickLabels` elements than `MajorTicks` elements, then MATLAB ignores the extra labels.
- If you specify fewer `MajorTickLabels` elements than `MajorTicks` elements, then MATLAB leaves the extra ticks unlabeled.

To create a blank label to a major tick, specify an empty character vector for that tick's corresponding `MajorTickLabels` element.

Example: `{'100','80','60','40','20','0'}`

Example: `{'Min','Max'}`

`MajorTickLabelsMode` — Creation mode of major tick labels

`'auto'` (default) | `'manual'`

Creation mode of the major tick labels, specified as one of the following:

- `'auto'` — MATLAB creates a cell array of character vectors to populate `MajorTickLabels`.
- `'manual'` — You specify the `MajorTickLabels` cell array of character vectors.

Appearance

`Orientation` — Slider layout position

`'horizontal'` (default) | `'vertical'`

Slider layout position, specified as `'horizontal'` or `'vertical'`.

`Visible` — Slider visibility

`'on'` (default) | `'off'`

Slider visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the slider is displayed on the screen. If the `Visible` property is set to `'off'`, the entire slider is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of slider

`[100 100 150 3]` (default) | `[left bottom width height]`

Location and size of the slider excluding tick marks and labels, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the slider
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the slider
`width`	Distance between the right and left outer edges of the slider
`height`	Distance between the top and bottom outer edges of the slider

All measurements are in pixel units.

You cannot change the height of a slider when the `Orientation` property value is `'horizontal'`. Similarly, you cannot change the width of a slider when the `Orientation` property value is `'vertical'`.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 200 60 60]`

`InnerPosition` — Inner location and size of slider

`[100 100 150 3]` (default) | `[left bottom width height]`

Inner location and size of the slider, excluding tick marks and tick labels, specified as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of slider

`[94 70 166 39]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the slider, including state marks and state labels, specified as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.4 0.6 0.7]

FontWeight — Font weight
'normal' (default) | 'bold'

Font weight, specified as one of these values:

- 'normal' — Default weight as defined by the particular font
- 'bold' — Thicker character outlines than 'normal'

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

FontAngle — Character slant
'normal' (default) | 'italic'

Character slant, specified as 'normal' or 'italic'. Setting this property to italic selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

ValueChangedFcn — Code to execute when slider value changes
'' (default) | function handle | cell array | character vector

Code to execute when slider value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the slider. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the slider. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of slider after app user's most recent interaction with it
`PreviousValue`	Value of slider before app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

This callback function does not execute if the slider value changes programmatically.

`ValueChangingFcn` — Code to execute as slider value changes

`''` (default) | function handle | cell array | character vector

Code to execute as the slider value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the slider. MATLAB passes this information in a `ValueChangingData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example,

`event.Value` returns the current value of the slider. The `ValueChangingData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangingData` object.

Property	Value
`Value`	Current value of the slider as the app user is interacting with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanging'`

The `Value` property of the `Slider` object is not updated until the app user releases the slider thumb. Therefore, to get the value as the thumb is being moved, your code must get the `Value` property of the `ValueChangingData` object.

The `ValueChangingFcn` callback executes as follows:

- If the app user clicks the slider value once. then the callback executes a single time. For example, if the slider is on 1.0, and the app user single-clicks at 1.1, then the callback executes once.
- If the app user clicks and drags the slider to a new position, the callback executes repeatedly. For example, if the slider value is 1.0, and the app user clicks, holds, and drags the thump to value 10.0, then the callback executes multiple times until the app user releases the thumb.

When the `Value` property changes programmatically, the callback does not execute.

`Enable` — Operational state of slider

`'on'` (default) | `'off'`

Operational state of the slider, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the app user can change the slider value.
- If you set this property to `'off'`, then the slider appears dimmed, indicating that the app user cannot change the slider value and the slider will not trigger a callback.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

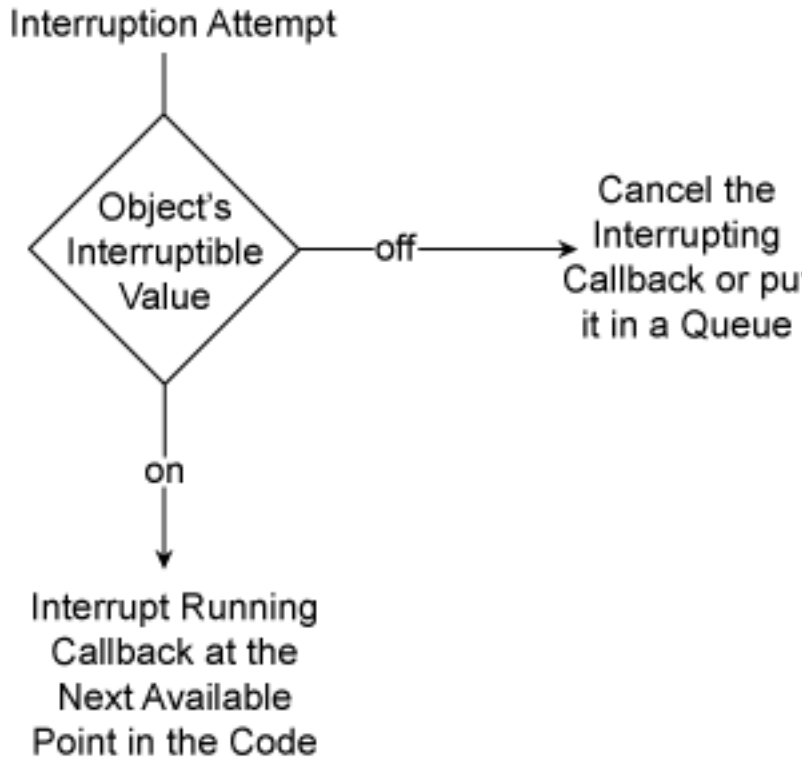

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uislider'`

This property is read-only.

Type of graphics object, returned as `'uislider'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'myslider'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle
`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions
`appdesigner` | `uifigure` | `uislider`

Introduced in R2016a

Spinner Properties

(App Designer) Control spinner appearance and behavior

Compatibility

Valid for spinners used in App Designer or figures created with the `uifigure` function. Apps created with GUIDE or the `figure` function do not support spinner components.

Description

Spinners are app components that enable the app user to enter numeric values or change a value by pressing an up or down arrow within the component. Typically, spinners generate an action when the app user changes the value. Properties control the appearance and behavior of a spinner. Use dot notation to refer to a particular object and property:

```
f = uifigure;
sp = uispinner(f);
val = sp.Value;
sp.Value = 20;
```

Value

`Value` — Spinner value
0 (default) | double-precision number

Spinner value, specified as a double-precision number.

When the app user types a value in the spinner, the value is a character vector. When the app user presses the **Enter** key or changes focus, MATLAB converts the app-user-entered value to a double-precision number.

MATLAB rejects the value if:

- It cannot convert the character vector to a scalar number.

- The value is NaN, blank, or a complex number.
- The value is a mathematical expression, such as `1+2`.
- The value is less than or greater than the values specified by the `Limits` property.

When MATLAB rejects the app-user-entered value, a tooltip appears describing the value requirements. The spinner immediately reverts to its previous value and no `ValueChangedFcn` runs.

Example: 10

`Limits` — Minimum and maximum spinner values

[-Inf Inf] (default) | two-element numeric array

Minimum and maximum spinner values, specified as a two-element numeric array. The first value must be less than the second value. Set array elements to `-Inf` or `Inf` to specify no minimum or no maximum, respectively.

If you change `Limits` such that the `Value` property is outside the new limits, MATLAB sets the `Value` property to a value within the new limits. For example, suppose the `Limits` property is `[0 100]` and the `Value` property is 20. If the `Limits` property changes to `[50 100]`, then MATLAB sets the `Value` property to 50 (assuming the `LowerLimitInclusive` value is `'on'`.

Example: `[-Inf 200]`

Example: `[-100 Inf]`

Example: `[-100 200]`

`LowerLimitInclusive` — Lower limit inclusiveness

`'on'` (default) | `'off'`

Lower limit inclusiveness, specified as one of the following:

- `'on'` — Value must be equal to or greater than the lower limit.
- `'off'` — Value must be greater than the lower limit.

`UpperLimitInclusive` — Upper limit inclusiveness

`'on'` (default) | `'off'`

Upper limit inclusiveness, specified as one of the following:

- `'on'` — Value must be equal to or less than the upper limit.
- `'off'` — Value must be less than the upper limit.

For example, if you want the numeric input to be between 0 and 1, excluding 0 and 1, do all of the following:

- Set the `Limits` property value to `[0 1]`.
- Set the `UpperLimitInclusive` property to `'off'`.
- Set the `LowerLimitInclusive` property to `'off'`.

`Step` — Quantity by which value is incremented or decremented

`1` (default) | numeric scalar

Quantity by which the `Value` property increments or decrements when the app user presses the up and down arrows, respectively.

`RoundFractionalValues` — Rounding of fractional values

`'off'` (default) | `'on'`

Rounding of fractional values entered by app users, specified as one of the following:

- `'on'` — MATLAB rounds the value if it results in a valid value and executes the `ValueChangedFcn` callback. If the resulting value is outside the lower or upper `Limits`, then MATLAB rounds to the nearest value that falls within the `Limits` and then executes the callback.
- `'off'` — MATLAB does not round a fractional value to a whole number.

If the `RoundFractionalValues` property value changes from `'off'` to `'on'` programmatically, then MATLAB applies these rules:

- If rounding the existing value yields an integer that lies inside the limit range specified by the `Limits` property, then MATLAB rounds up the existing value.
- If rounding the existing value yields an integer that is less than the lower limit, then MATLAB rounds up the existing value.
- If rounding the existing value yields an integer that is greater than the upper limit, then MATLAB rounds down the existing value.
- If the limits are configured such that there is no valid integer in the range, then MATLAB sets the `RoundFractionalValues` property value back to `'off'` and displays an error message.

Appearance

`BackgroundColor` — Spinner background color

`[1 1 1]` (default) | RGB triplet | short name | long name

Spinner background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the spinner.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`HorizontalAlignment` — Horizontal alignment of numbers within spinner
`'right'` (default) | `'left'` | `'center'`

Horizontal alignment of numbers within the spinner, specified as:

- `'right'` — Numbers align on the right side of the spinner.
- `'left'` — Numbers align on the left side of the spinner.
- `'center'` — Numbers align in the center of the spinner.

`ValueDisplayFormat` — Numeric display format
`'%11.4g'` (default) | character vector

Numeric display format, specified as a character vector.

MATLAB uses `sprintf(NumericDisplayFormat,Value)` to convert the value of the spinner to a character vector and displays it.

You can mix text with format operators. For example:

```
spin = uispinner('ValueDisplayFormat','%.0f MS/s');
```

The resulting spinner component looks like this:



When the app user clicks in the spinner field, the field shows the value without the text.

For a complete list of supported format operators, see `sprintf` in the MATLAB documentation.

Example: '%.0f MS/s'

`Visible` — Spinner visibility

`'on'` (default) | `'off'`

Spinner visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the spinner is displayed on the screen. If the `Visible` property of a spinner is set to `'off'`, the entire spinner is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of spinner

`[100 100 100 22]` (default) | `[left bottom width height]`

Location and size of spinner relative to the parent container, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the spinner
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the spinner

Element	Description
`width`	Distance between the right and left outer edges of the spinner
`height`	Distance between the top and bottom outer edges of the spinner

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 22]`

`InnerPosition` — Inner location and size of spinner

`[100 100 100 22]` (default) | `[left bottom width height]`

Inner location and size of the spinner, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of spinner

`[100 100 100 22]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of spinner, returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when spinner value changes

`''` (default) | function handle | cell array | character vector

Code to execute when the spinner value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback executes when the app user changes focus or presses the **Enter** key after changing the spinner value. It does not matter whether the user changes the spinner value by typing or by using the up and down arrow buttons.

This callback function can access specific information about the user's interaction with the spinner. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the spinner. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of spinner after app user's most recent interaction with it
`PreviousValue`	Value of spinner before app user's most recent interaction with it

Property	Value
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

This callback function does not execute if the spinner value changes programmatically.

`ValueChangingFcn` — Code to execute as spinner value changes

`''` (default) | function handle | cell array | character vector

Code to execute as the spinner value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the spinner. MATLAB passes this information in a `ValueChangingData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.Value` returns the current value of the spinner. The `ValueChangingData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangingData` object.

Property	Value
`Value`	Current value of the spinner as the app user is interacting with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanging'`

The `Value` property of the `Spinner` is not updated until the app user releases the arrow key. Therefore, to get the values while the arrow key is being pressed, your code must get the `Value` property of the `ValueChangingData` object.

The callback executes as follows:

- If the app user clicks a spinner up or down arrow, the callback executes once. For example, suppose that the spinner value is 2, and the `Step` value is 1. If the app user clicks the up arrow, the callback executes.

- If the app user presses and holds a spinner up or down arrow, the callback executes repeatedly. For example, if the app user clicks and holds the up arrow, the callback executes multiple times until the app user releases the up arrow.

If the spinner `Value` property changes programmatically, then the callback does not execute.

`Editable` — Editability of spinner

`'on'` (default) | `'off'`

Editability of the spinner, specified as `'on'` or `'off'`.

Use this property in combination with the `Enable` property value to determine if and how the component responds to app user input:

- To make the spinner editable, the arrow buttons operational, and the associated callback triggerable, set both the `Enable` property and the `Editable` property values to `'on'`.
- To make the spinner uneditable, but the arrow buttons operational, set the `Editable` property to `'off'` and the `Enable` property to `'on'`.
- To make the spinner uneditable and the arrow buttons unoperational, set the `Editable` property to `'off'` and the `Enable` property to `'off'`.

`Enable` — Operational state of spinner

`'on'` (default) | `'off'`

Operational state of the spinner, specified as `'on'` or `'off'`. Use this property in combination with the `Editable` property value to determine if and how the component responds to app user input:

- To make the spinner editable, the arrow buttons operational, and the associated callback triggerable, set both the `Enable` property and the `Editable` property values to `'on'`
- To make the spinner uneditable, but the arrow buttons operational, set the `Editable` property to `'off'` and the `Enable` property to `'on'`.
- To make the spinner uneditable and the arrow buttons unoperational, set the `Editable` property to `'off'` and the `Enable` property to `'off'`.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

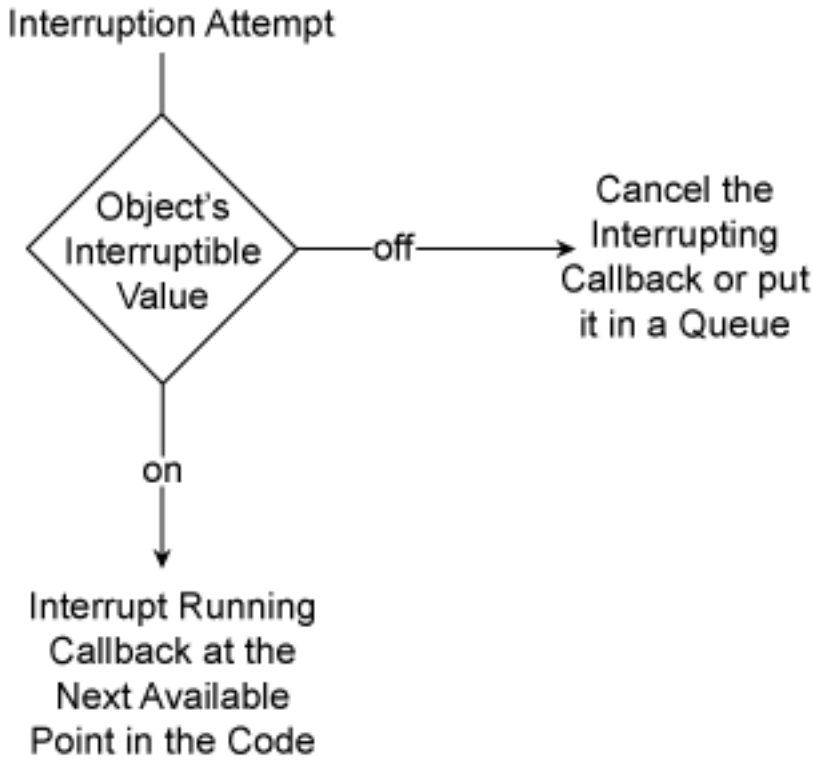

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose

callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uispinner'`

This property is read-only.

Type of graphics object, returned as `'uispinner'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the

object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'myspinner'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uispinner`

Introduced in R2016a

StateButton Properties

(App Designer) Control state button appearance and behavior

Compatibility

Valid for state buttons created with App Designer or the `uibutton` function. For state buttons created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

State buttons are components that indicate a logical state. Typically, state buttons generate an action when the state changes. Properties control the appearance and behavior of a state button. Use dot notation to refer to a particular object and property:

```
f = uifigure;
sb = uibutton(f,'state');
selected = sb.Value;
sb.Value = true;
```



Value

`Value` — Pressed state of button
`0` (default) | `1`

Pressed state of button, specified as `0` (false) or `1` (true). When the value is 1, the state button appears pressed. When the value is 0, the state button appears unpressed.

Appearance

`Text` — Button text
`'State Button'` (default) | character vector | cell array of character vectors

Button text, specified as one of the following:

- Character vector — Displayed as a single line of text. For example:

  ```
  uibutton('state','Text', 'Steady State');
  ```

- Cell array of character vectors — Displayed as multiline text. Each row of the cell array is one line of text. Adjust the button size by changing the `Position` property value.

  ```
  uibutton('state','Text',{'Steady','State'},...
           'Position',[100 100 100 40]);
  ```

Example: `'Steady State'`

Example: `{'Steady','State'}`

`Icon` — File name of button icon

`''` (default) | character vector

File name of the button icon, specified as a character vector.

The file name can be an image file name on the MATLAB path or a full path to an image file. If you plan to share an app with others, put the image file on the MATLAB path to facilitate app packaging.

The image file type must be JPEG, GIF, or PNG.

- If the button text takes up all the space specified by the `Position` property value, then MATLAB does not display the icon.
- If some room is available for the icon, then MATLAB scales down the image to fit, if necessary.

Example: `'icon.png'`

Example: `'C:\Documents\icon.png'`

`HorizontalAlignment` — Horizontal alignment of icon and text

`'center'` (default) | `'left'` | `'right'`

Horizontal alignment of the icon and the text on the button, specified as `'center'`, `'left'`, or `'right'`.

The following image shows the three horizontal alignment options, center, left, and right, when the `VerticalAlignment` and `IconAlignment` properties are set to their default values (`'center'` and `'left'`, respectively).

`VerticalAlignment` — Vertical alignment of icon and text
`'center'` (default) | `'top'` | `'bottom'`

Vertical alignment of the icon and the text on the button, specified as `'center'`, `'top'`, or `'bottom'`.

These images show the three vertical alignment options when the value of `HorizontalAlignment` is `'center'` and the value of `IconAlignment` is `'left'`.



Note: Vertical alignment values appear to have no effect when the button is the default height.

`IconAlignment` — Location of icon relative to text
`'left'` (default) | `'center'` | `'top'` | `'bottom'` | `'right'`

Location of the button icon relative to the button text (if any), specified as one of the values in this table.

Note: The table images reflect the icon location when `HorizontalAlignment` and `VerticalAlignment` are each set to their default value, `'center'`.

Value	Result
`'left'`	
`'right'`	
`'top'`	
`'bottom'`	
`'center'`	

If you specify an empty character vector (`''`) for the `Text` property, then the icon aligns as though it is text, according to the values set for `HorizontalAlignment` and `VerticalAlignment`. The `IconAlignment` property value has no effect in this case.

`BackgroundColor` — Background color of button

`[.96 .96 .96]` (default) | RGB triplet | short name | long name

Background color of the button, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the button.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`Visible` — Button visibility

`'on'` (default) | `'off'`

Button visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the button is displayed on the screen. If the `Visible` property is set to `'off'`, the entire button is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Button location and size

`[100 100 100 22]` (default) | `[left bottom width height]`

Button location and size, relative to the parent container, specified as the vector, `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the state button
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the state button
`width`	Distance between the right and left outer edges of the state button
`height`	Distance between the top and bottom outer edges of the state button

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 22`

`InnerPosition` — Inner location and size of button

`[100 100 100 22]` (default) | `[left bottom width height]`

Inner location and size of the button, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of button

`[100 100 100 22]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the button returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range

[0,1]; for example, [0.4 0.6 0.7]. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: [0.4 0.6 0.7]

FontWeight — Font weight
'normal' (default) | 'bold'

Font weight, specified as one of these values:

- 'normal' — Default weight as defined by the particular font
- 'bold' — Thicker character outlines than 'normal'

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

FontAngle — Character slant
'normal' (default) | 'italic'

Character slant, specified as 'normal' or 'italic'. Setting this property to italic selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

ValueChangedFcn — Code that executes when button state changes
'' (default) | function handle | cell array | character vector

Code that executes when the button state changes, specified as one of the following:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the button. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the button. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of state button after the app user's most recent interaction with it
`PreviousValue`	Value of state button before the app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

If the state button value changes programmatically, this callback function does not execute.

`Enable` — Operational state of button

`'on'` (default) | `'off'`

Operational state of the button, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, the app user can press the button.
- If you set this property to `'off'`, the button appears dimmed, indicating that the app user cannot press it, and that the button will not trigger a callback.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

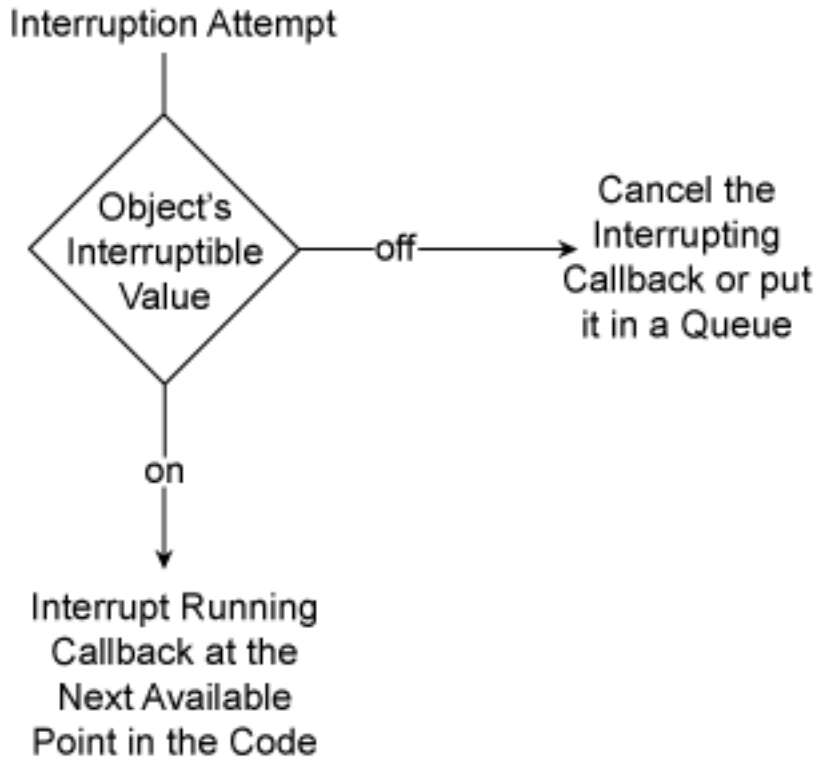

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uistatebutton'`

This property is read-only.

Type of graphics object, returned as `'uistatebutton'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'mybutton'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uibutton` | `uifigure`

Introduced in R2016a

Switch Properties

(App Designer) Control switch appearance and behavior

Compatibility

Valid for switches used in App Designer or in figures created with the `uifigure` function only. Apps created with GUIDE or the `figure` function do not support switch components.

Description

Switches are app components that indicate a logical state. Typically, switches generate an action when the state changes. Properties control the appearance and behavior of a switch. Use dot notation to refer to a particular object and property:

```
f = uifigure;
s = uiswitch(f);
val = s.Value;
s.Value = 'On';
```

Value

`Value` — Value of switch
`'Off'` (default) | element or elements of `Items` | element or elements of `ItemsData`

Value of switch, specified as an element of the `Items` or `ItemsData` property value.

- If `ItemsData` is empty, then `Value` is the selected element of `Items`.
- If `ItemsData` is not empty, then `Value` is the element in `ItemsData` that corresponds to the selected element of `Items`.

Programmatic Changes When `ItemsData` Is Empty

Suppose all of the following are true:

- The `Items` property value is `{'Off','On'}`.
- The `ItemsData` value is empty.
- The app user sets the switch to `On` before the programmatic change.

If the `Items` property value changes programmatically to `{'Stop','On'}`, then the element selected before the programmatic change is an element of the updated `Items` property value. In this case, the `Value` remains `'On'` and the switch selection remains **On**.

If the `Items` property value changes programmatically to `{'Stop','Run'}`, then the switch element selected before the programmatic change is not an element of the updated `Items` property value. In this case, the `Value` becomes the first element of the `Items` property value (`'Stop'`) and the switch selection is **Stop**.

Programmatic Changes When `ItemsData` Is Not Empty

Suppose all of the following are true:

- The `Items` value is `{'Off','On'}`.
- The `ItemsData` value is originally `[0 1]`.
- The app user sets the switch to `On` before the programmatic change.

If the `ItemsData` property changes programmatically to `[1 0]`, then the app user selection corresponds to an element of `ItemsData` that is the same before and after the programmatic change (`1`). However, `1` now corresponds to the other `Items` element. So the switch flips, even though `Value` remains unchanged.

If the `ItemsData` property changes programmatically to `[10 100]`, then the app user selection corresponds to an element of `ItemsData` that no longer exists. In this case, `Value` becomes the first element of `ItemsData` (`10`) and the switch selection is **Off**.

`Items` — Options for switch

`{'Off','On'}` (default) | 1-by-2 cell array of character vectors

Options for the switch, specified as a 1-by-2 cell array of character vectors. Duplicate elements are allowed.

`ItemsData` — Data associated with each element of `Items`

empty array (`[]`) (default) | 1-by-2 numeric array | 1-by-2 cell array

Data associated with each element of the `Items` property value, specified as a 1-by-2 numeric array or a 1-by-2 cell array. Duplicate elements are allowed.

For example, if you set the `Items` value to `{'Freezing','Boiling'}`, then you might set the `ItemsData` value to corresponding temperatures in degrees Celsius, `[0,100]`. The `ItemsData` value is not visible to the app user.

Example: `{'One' 'Two'}`

Example: `[10 20]`

Appearance

`Orientation` — Layout position of switch

`'horizontal'` (default) | `'vertical'`

Layout position of the switch, specified as `'horizontal'` or `'vertical'`.

`Visible` — Visibility of switch

`'on'` (default) | `'off'`

Visibility of the switch, specified as `'on'` or `'off'`. The `Visible` property determines whether the switch is displayed on the screen. If the `Visible` property is set to `'off'`, the entire switch is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of switch

`[100 100 45 20]` (default) | `[left bottom width height]`

Switch location and size of the switch, excluding state marks and labels, specified as the vector, `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the switch

Element	Description
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the switch
`width`	Distance between the right and left outer edges of the switch, excluding labels
`height`	Distance between the top and bottom outer edges of the switch, excluding labels

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 200 90 40`

`InnerPosition` — Inner location and size of switch

`[100 100 45 20]` (default) | `[left bottom width height]`

Inner location and size of the switch, excluding state marks and state labels, specified as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of switch

`[79 100 88 20]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the switch, including state marks and state labels, specified as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size
12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color
`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight
`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when switch state changes

`''` (default) | function handle | cell array | character vector

Code to execute when switch state changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace

The app user can change the switch state by doing either of the following:

- Clicking and releasing the mouse button anywhere on the switch (including the state labels)
- Clicking on the switch, dragging, and then releasing the mouse button while still on the switch.

This callback function can access specific information about the user's interaction with the switch. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the switch. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of switch after the app user's most recent interaction with it
`PreviousValue`	Value of switch before the app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the app user clicks the currently selected option, or if the `Value` property setting changes programmatically.

`Enable` — Operational state of switch

`'on'` (default) | `'off'`

Operational state of switch, specified as `'on'` or `'off'`.

If you set this property to `'on'`, the app user can slide the switch.

If you set this property to `'off'`, the switch appears dimmed, indicating that the app user cannot slide the switch and it will not trigger a callback.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running

callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

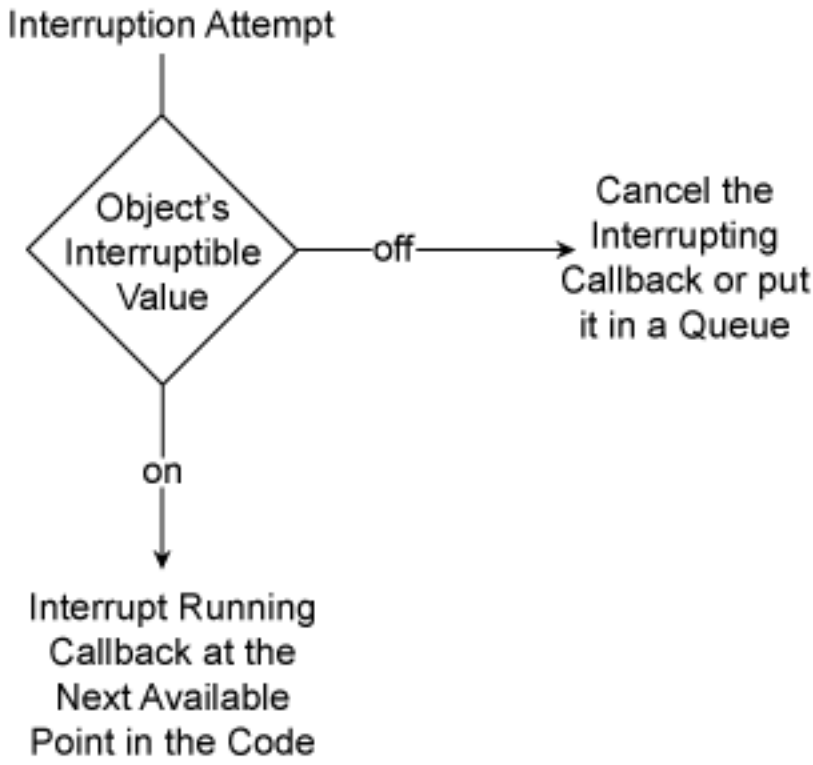

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uiswitch'`

This property is read-only.

Type of graphics object, returned as `'uiswitch'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'myswitch'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions

include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uiswitch`

Introduced in R2016a

Tab Properties

(App Designer) Control tab appearance

Compatibility

Valid for tabs used in App Designer or figures created with the `uifigure` function. For tabs used in GUIDE or apps created with the `figure` function, see Uitab Properties.

Description

Tabs are containers for grouping for grouping UI components together with a tabbed label. Use the `uitab` function to create a tab inside a tab group. Properties control the appearance and behavior of a tab. Use dot notation to refer to a particular object and property:

```
f = uifigure;
tgroup = uitabgroup(f);
tab1 = uitab(tgroup);
tab2 = uitab(tgroup);
tab1.Title = 'Tab One';
```

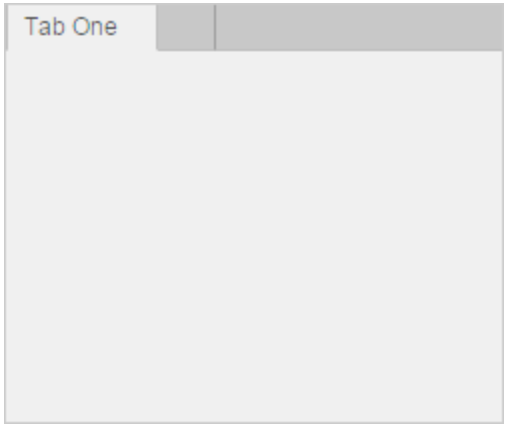

Appearance

`Title` — Tab title

character vector

Tab title, specified as a character vector.

MATLAB does not interpret a vertical slash (`'|'`) character as a line break, a vertical slash is included in the tab title.

If you want to specify a Unicode character, pass the Unicode decimal code to the `char` function. For example, `['Multiples of ' char(960)]` displays as `Multiples of` π

Example: `'Options'`

Example: `['Multiples of ' char(960)]`

`BackgroundColor` — Tab background color

`[.94 .94 .94]` (default) | RGB triplet | short name | long name

Tab background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the tab panel.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`ForegroundColor` — Tab title color

`[0 0 0]` (default) | RGB triplet | short name | long name

Tab title color, specified as an RGB triplet, short name, or long name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

Location and Size

`Position` — Location and size of tab

`[left bottom width height]`

This property is read-only.

Location and size of the tab, returned as a four-element vector of the form `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the tab group to the inner left edge of the tab
`bottom`	Distance from the inner bottom edge of the tab group to the inner bottom edge of the tab
`width`	Distance between the right and left inner edges of the tab
`height`	Distance between the top and bottom inner edges of the tab

All measurements are in units specified by the `Units` property.

Note: These are some important points to consider when using the `Position` property:

- `Position` values are affected by the length of the tab title and theTabLocation property of the parent `TabGroup` object.
- `Position` values are relative to the *drawable area* of the parent `TabGroup`, which is the area inside its borders.

`OuterPosition` — Location and size of tab

`[left bottom width height]`

This property is read-only.

Location and size of the tab, returned as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `InnerPosition` property values.

`InnerPosition` — Location and size of tab

`[left bottom width height]`

This property is read-only.

Location and size of the tab, returned as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `OuterPosition` property values.

`Units` — Units of measurement

`'pixels'` (default)

Units of measurement, specified as `'pixels'`.

`AutoResizeChildren` — Allow child components to resize automatically

`'on'` (default) | `'off'`

Allow child components to resize automatically, specified as `'on'` or `'off'`.

- `'on'` — Child components automatically resize when this container resizes.
- `'off'` — Child components do not resize.

The `AutoResizeChildren` property only affects direct children of a container, not children inside nested containers.

If you prefer to use your own resizing algorithm, set this property to `'off'` and create a `SizeChangedFcn` callback for the container. Be aware that the `SizeChangedFcn` callback will not execute when `AutoResizeChildren` is set to `'on'`.

Alternatively, if you want a fixed layout that does not resize, set the Resize property of the `Figure` object to `'off'`.

`SizeChangedFcn` — Size change callback function

`''` (default) | function handle | cell array | character vector

Size change callback function, specified as one of these values:

- Function handle
- Cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- Character vector that is a valid MATLAB expression. MATLAB evaluates this expression in the base workspace.

Define this callback to customize the app layout when the size of this container changes (e.g., when the user resizes the window).

Note: The `SizeChangedFcn` callback will not execute unless the `AutoResizeChildren` property of this container is set to `'off'`. In App Designer, you can make the

`SizeChangedFcn` executable by clearing the **Resize components when app is resized** check box in the **UI Figure Properties** panel.

The `SizeChangedFcn` callback executes when:

- This container becomes visible for the first time.
- This container is visible while its size changes.
- This container becomes visible for the first time after its size changes. This situation occurs when the size changes while the container is invisible, and then it becomes visible later.

Other important points to consider when defining a `SizeChangedFcn` callback:

- Consider delaying the display of this container until after all the variables that the `SizeChangedFcn` uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the container, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- If your app contains nested containers, they resize from the inside out.
- To access the container that is resizing from within the `SizeChangedFcn`, refer to the source object (the first input argument in the callback) or use the `gcbo` function.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the

`BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

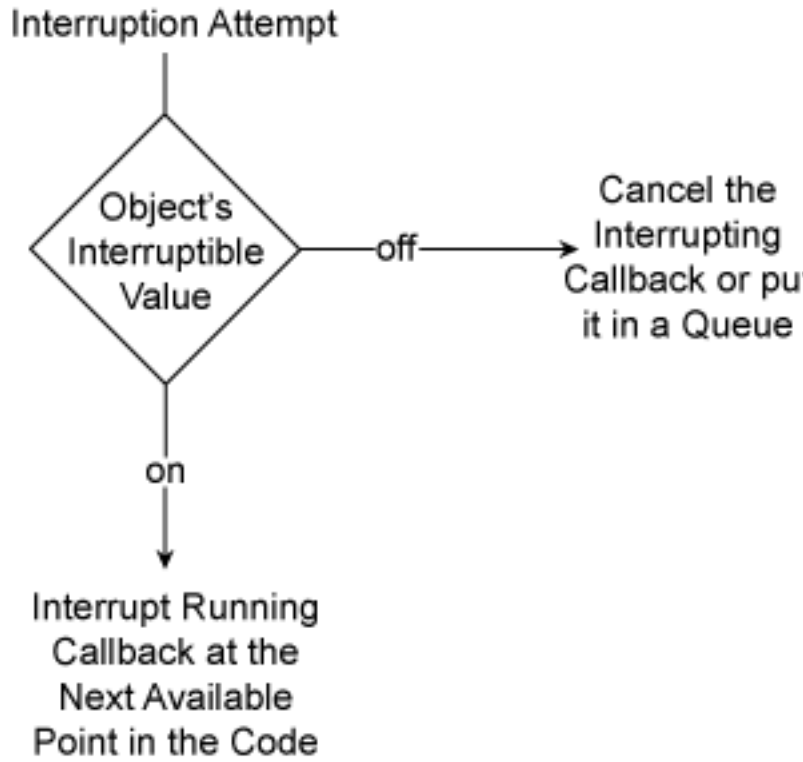

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uitab'`

This property is read-only.

Type of graphics object, returned as `'uitab'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'tab2'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`TabGroup` object

Parent object, specified as a `TabGroup` object. The `TabGroup` must be the child of a `Figure` created using the `uifigure` function.

`Children` — Children of tab

empty `GraphicsPlaceholder` array (default) | 1-D array of component objects

Children of tab, returned as an empty `GraphicsPlaceholder` or a 1-D array of app component objects.

You cannot add or remove children using the `Children` property of the tab. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the order of the tabs displayed on the screen.

To add a child to this list, set the `Parent` property of the child component to be the `Tab` object.

`HandleVisibility` — Visibility of object handle
`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions
`appdesigner` | `uifigure` | `uitab` | `uitabgroup`

Properties
TabGroup Properties

Introduced in R2016a

TabGroup Properties

(App Designer) Control tab group appearance and behavior

Compatibility

Valid for tab groups used in App Designer or figures created with the `uifigure` function. For tab groups used in GUIDE or apps created with the `figure` function, see Uitabgroup Properties.

Description

Tab groups are tab containers that allow to you identify the currently selected tab. Properties control the appearance and behavior of a tab group. Use dot notation to refer to a particular object and property:

```
f = uifigure;
tgroup = uitabgroup(f);
tab1 = uitab(tgroup,'Title','Tab One');
tab2 = uitab(tgroup,'Title','Tab Two');
tgroup.SelectedTab = tab2;
```

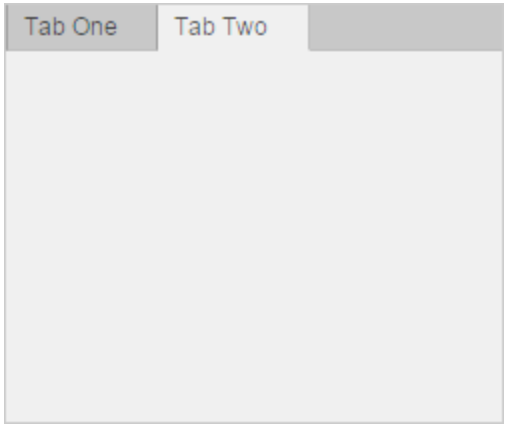

Appearance

`Visible` — Tab group visibility

`'on'` (default) | `'off'`

Tab group visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the tab group is displayed on the screen. If the `Visible` property is set to `'off'`, the entire tab group is hidden. However, you can still specify and access properties of the `TabGroup` object.

To make your app start faster, set the `Visible` property of all components that are not initially displayed to `'off'`.

Note Changing the `Visible` property of a `TabGroup` object does *not* change the values of the `Visible` properties of its child components. This is true even though hiding the tab group causes the children to be hidden.

Location and Size

`Position` — Location and size of tab group

`[left bottom width height]`

Location and size of the tab group, specified as a four-element vector of the form `[left bottom width height]`.

This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the tab group
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the tab group
`width`	Distance between the right and left outer edges of the tab group
`height`	Distance between the top and bottom outer edges of the tab group

All measurements are in units specified by the `Units` property.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

`OuterPosition` — Location and size of tab group

`[left bottom width height]`

Location and size of the tab group, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `InnerPosition` property values.

`InnerPosition` — Location and size of tab group

`[left bottom width height]`

Location and size of the tab group, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` and `OuterPosition` property values.

`Units` — Units of measurement

`'pixels'` (default)

Units of measurement, specified as `'pixels'`.

`TabLocation` — Tab label location

`'top'` (default) | `'bottom'` | `'left'` | `'right'`

Tab label location, specified as `'top'`, `'bottom'`, `'left'`, or `'right'`. This property specifies the location of the tab labels with respect to the tab group.

`AutoResizeChildren` — Allow child components to resize automatically

`'on'` (default) | `'off'`

Allow child components to resize automatically, specified as `'on'` or `'off'`.

- `'on'` — Child components automatically resize when this container resizes.
- `'off'` — Child components do not resize.

The `AutoResizeChildren` property only affects direct children of a container, not children inside nested containers.

If you prefer to use your own resizing algorithm, set this property to `'off'` and create a `SizeChangedFcn` callback for the container. Be aware that the `SizeChangedFcn` callback will not execute when `AutoResizeChildren` is set to `'on'`.

Alternatively, if you want a fixed layout that does not resize, set the Resize property of the `Figure` object to `'off'`.

`SizeChangedFcn` — Size change callback function

`''` (default) | function handle | cell array | character vector

Size change callback function, specified as one of these values:

- Function handle
- Cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- Character vector that is a valid MATLAB expression. MATLAB evaluates this expression in the base workspace.

Define this callback to customize the app layout when the size of this container changes (e.g., when the user resizes the window).

Note: The `SizeChangedFcn` callback will not execute unless the `AutoResizeChildren` property of this container is set to `'off'`. In App Designer, you can make the `SizeChangedFcn` executable by clearing the **Resize components when app is resized** check box in the **UI Figure Properties** panel.

The `SizeChangedFcn` callback executes when:

- This container becomes visible for the first time.
- This container is visible while its size changes.
- This container becomes visible for the first time after its size changes. This situation occurs when the size changes while the container is invisible, and then it becomes visible later.

Other important points to consider when defining a `SizeChangedFcn` callback:

- Consider delaying the display of this container until after all the variables that the `SizeChangedFcn` uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the container, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- If your app contains nested containers, they resize from the inside out.
- To access the container that is resizing from within the `SizeChangedFcn`, refer to the source object (the first input argument in the callback) or use the `gcbo` function.

Interactive Control

`SelectedTab` — Currently selected tab

`Tab` object

Currently selected tab, specified as a `Tab` object. Use this property to determine the currently selected tab within a tab group. You can also use this property to set the default tab selection. The default value of the `SelectedTab` property is the first `Tab` that you add to the `TabGroup`.

`SelectionChangedFcn` — Code to execute when tab selection changes

`''` (default) | function handle | cell array | character vector

Code to execute when the tab selection changes, specified as one of these values:

- Function handle
- Cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- Character vector hat is a valid MATLAB expression. MATLAB evaluates this expression in the base workspace.

This callback function executes when the app user selects a different tab within the tab group.

This callback function can access specific information about the user's interaction with the tabs. MATLAB passes this information in a `SelectionChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example,

`event.NewValue` returns the currently selected tab. The `SelectionChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `SelectionChangedData` object.

Property	Description
`OldValue`	Previously selected `Tab`, or `[]` if none was selected
`NewValue`	Currently selected `Tab`
`Source`	Component that executes the callback
`EventName`	`'SelectionChanged'`

Example: `@myfun`

Example: `{@myfun,x}`

Callback Execution Control

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose

callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

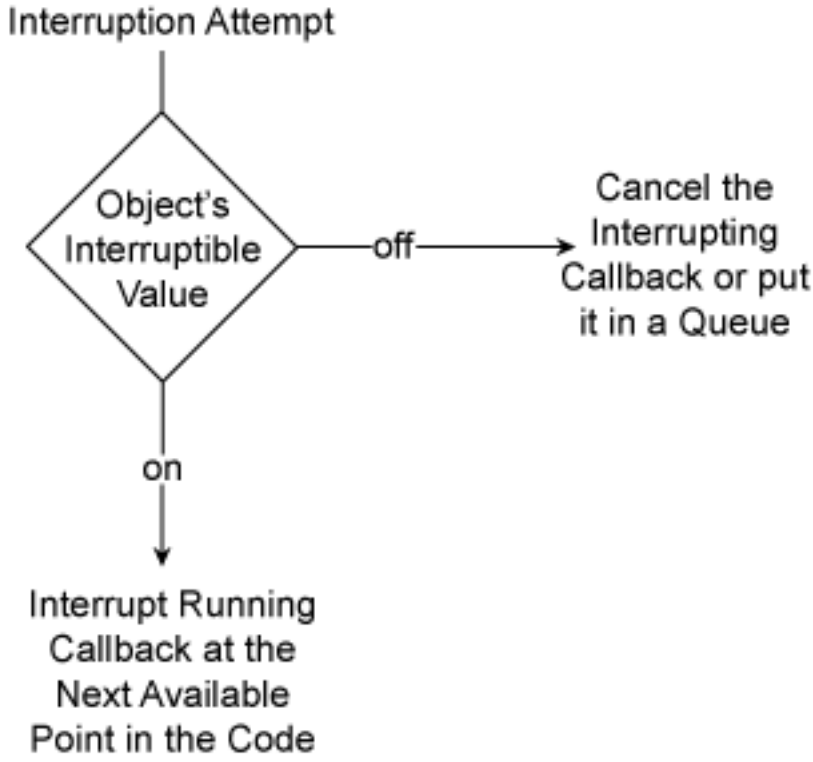

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.

- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uitabgroup'`

This property is read-only.

Type of graphics object, returned as `'uitabgroup'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'tabgroup1'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`Children` — TabGroup children

empty `GraphicsPlaceholder` array (default) | 1-D array of `Tab` objects

`TabGroup` children, returned as an empty `GraphicsPlaceholder` or a one-dimensional array of `Tab` objects.

You cannot add or remove tabs using the `Children` property of the `TabGroup`. Use this property to view the list of tabs or to reorder the tabs. The order of the `Tab` objects in this array reflects the order of the tabs displayed on the screen.

To add a child to this list, set the `Parent` property of a `Tab` object to be the `TabGroup` object.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions
`appdesigner` | `uifigure` | `uitab` | `uitabgroup`

Properties
Tab Properties

Introduced in R2016a

TextArea Properties

(App Designer) Control text area appearance and behavior

Compatibility

Valid for text areas created with App Designer or the `uitextarea` function. For text areas created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

Text areas are app components that enable the app user to specify multiple lines of text. Typically, text areas generate an action after the app user enters text. Properties control the appearance and behavior of a text area. Use dot notation to refer to a particular object and property:

```
f = uifigure;
tarea = uitextarea(f);
text = tarea.Value;
tarea.Value = {'Joe Welford';'Mary Reilly';'Roberta Silber'};
```

Value

`Value` — Text in text area
{ ' ' } (default) | cell array of character vectors

Text in text area, specified as a cell array of character vectors. MATLAB can properly render formatted text, such as this:

```
cellArrayText{1} = sprintf('%s\n%s', 'Line 1', 'Line 2')
cellArrayText{2} = sprintf('%s\n%s', 'Line 3', 'Line 4')
textarea = uitextarea('Value',cellArrayText);
```

If a row of text in the cell array does not fit into the width of the text area, MATLAB wraps the text.

If there are too many rows to display in the text area size, MATLAB adds a scroll bar.

Example: {'Joseph Welford'; 'Mary Reilly'; 'Roberta Silberlicht'}

Appearance

`HorizontalAlignment` — Horizontal alignment of text within text area

`'left'` (default) | `'right'` | `'center'`

Alignment of text within the text area, specified as `'left'`, `'right'`, or `'center'`. The alignment affects the display as the app user edits the text area and how MATLAB displays the text in the app.

`BackgroundColor` — Text area background color

`[1 1 1]` (default) | RGB triplet | short name | long name

Text area background color, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the text area.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`

Long Name	Short Name	RGB Triplet
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`Visible` — Text area visibility

`'on'` (default) | `'off'`

Text area visibility, specified as `'on'` or `'off'`. The `Visible` property determines whether the text area is displayed on the screen. If the `Visible` property is set to `'off'`, the entire text area is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of text area

`[100 100 150 60]` (default) | `[left bottom width height]`

Location and size of the text area relative to the parent, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the text area
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the text area
`width`	Distance between the right and left outer edges of the text area

Element	Description
`height`	Distance between the top and bottom outer edges of the text area

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 90]`

`InnerPosition` — Inner location and size of text area

`[100 100 150 60]` (default) | `[left bottom width height]`

Inner location and size of the text area, specified as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of text area

`[100 100 150 60]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the text area returned as `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant
`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute after text update
`''` (default) | function handle | cell array | character vector

Code to execute after the text update, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

The callback executes when the app user changes the text and either presses **Tab** or clicks outside the text area.

This callback function can access specific information about the user's interaction with the text area. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the text area. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of text area after app user's most recent interaction with it
`PreviousValue`	Value of text area before app user's most recent interaction with it

Property	Value
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the text area value changes programmatically.

`Editable` — Editability of text area

`'on'` (default) | `'off'`

Editability of the text area, specified as `'on'` or `'off'`.

Use this property in combination with the `Enable` property value to determine if and how the component responds to app user input:

- To make the text area editable and the associated callback triggerable, set both the `Enable` property and the `Editable` property values to `'on'`.



- To make the text area uneditable, but the text easy to read, set the `Enable` property value to `'on'` and the `Editable` property value to `'off'`.



- To make the text area uneditable and the text dimmed, set both properties to `'off'`.



`Enable` — Operational state of text area

`'on'` (default) | `'off'`

Operational state of the text area, specified as `'on'` or `'off'`.

Use this property in combination with the `Enable` property value to determine if and how the component responds to app user input:

- To make the text area editable and the associated callback triggerable, set both the `Enable` property and the `Editable` property values to `'on'`.



- To make the text area uneditable, but the text easy to read, set the `Enable` property value to `'on'` and the `Editable` property value to `'off'`.



- To make the text area uneditable and the text dimmed, set both properties to `'off'`.



Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the

`BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

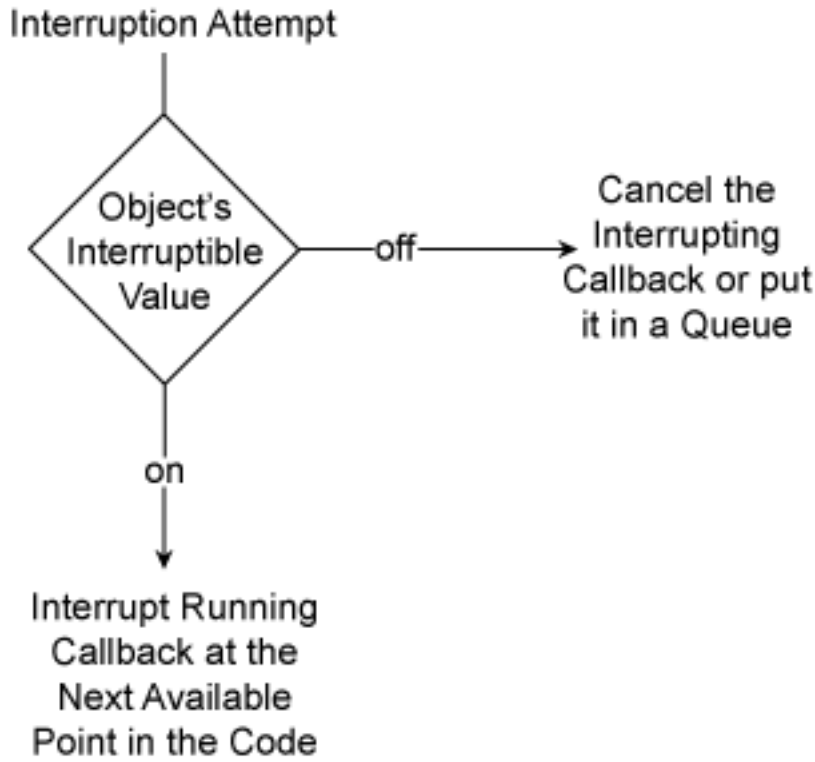

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uitextarea'`

This property is read-only.

Type of graphics object, returned as `'uitextarea'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'mytextarea'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions

include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uitextarea`

Introduced in R2016a

ToggleButton Properties

(App Designer) Control toggle button appearance

Compatibility

Valid for toggle buttons created with App Designer or the `uitogglebutton` function. For buttons created with GUIDE or the `uicontrol` function, see Uicontrol Properties.

Description

Toggle buttons are app components that appear in a button group, as a set of mutually exclusive options. Typically, the button group to which the toggle button belongs generates an action when the selection changes. Properties control the appearance and behavior of a toggle button. Use dot notation to refer to a particular object and property:

```
f = uifigure;
bg = uibuttongroup(f)
togbutton = uitogglebutton(bg);
txt = togbutton.Text;
togbutton.Text = 'Celsius';
```



Note: To specify how you want your app to respond when the app user changes a toggle button selection, code the `SelectionChangedFcn` callback for the parent `ButtonGroup`.

Value

`Value` — State of toggle button

1 | 0

State of the toggle button specified as `0` (unpressed) or `1` (depressed). Within a given button group, only one toggle button can be selected (depressed) at a time. When the

`Value` property is set to `1`, the toggle button appears depressed. The state of the first button added to a button group is `1`, by default. Subsequent buttons added to the same button group have a default state of `0`.

When the `Value` property of a `ToggleButton` changes to `1`, the `Value` property of the previously selected `ToggleButton` changes to `0`. In addition, the `SelectedObject` property value of the `ButtonGroup` is updated.

If you programmatically change the `Value` property of a `ToggleButton` to `0`, MATLAB sets the `Value` property of the first `ToggleButton` *added* to the `ButtonGroup` to `1`. If the first `ToggleButton` added is the one for which you programmatically set the `Value` property to `0`, then MATLAB sets the `Value` property for the `ToggleButton` added to the `ButtonGroup` to `1`.

Note: The first `ToggleButton` *added* to a `ButtonGroup` is not necessarily the first `ToggleButton` *listed* in the `Children` property of the `ButtonGroup`.

Appearance

`Text` — Text for toggle button

`'Toggle Button'` (default) | character vector | cell array of character vectors

Text for toggle button, specified as a character vector or a cell array of character vectors.

Example: `'Steady state'`

Example: `{'Steady','state'}`

`HorizontalAlignment` — Horizontal alignment of icon and text

`'center'` (default) | `'left'` | `'right'`

Horizontal alignment of the text and the icon on the button, specified as `'center'`, `'left'`, or `'right'`.

This image shows the three horizontal alignment options, center, left, and right, when the `VerticalAlignment` and `IconAlignment` properties are set to their default values (`'center'` and `'left'`, respectively).

`VerticalAlignment` — Vertical alignment of icon and text

`'center'` (default) | `'top'` | `'bottom'`

Vertical alignment of the icon and the text on the button, specified as `'center'`, `'top'`, or `'bottom'`.

These images show the three vertical alignment options when the value of `HorizontalAlignment` is `'center'` and the value of `IconAlignment` is `'left'`.



Note: Vertical alignment values appear to have no effect when the button is the default height.

`Icon` — File name of button icon

`' '` (default) | character vector

File name of the button icon, specified as a character vector.

The file name can be an image file name on the MATLAB path or a full path to an image file. If you plan to share an app with others, put the image file on the MATLAB path to facilitate app packaging.

The image file type must be JPEG, GIF, or PNG.

- If the button text takes up all the space specified by the `Position` property value, then MATLAB does not display the icon.
- If some room is available for the icon, then MATLAB scales down the image to fit, if necessary.

Example: `'icon.png'`

Example: `'C:\Documents\icon.png'`

`IconAlignment` — Location of icon relative to text

`'left'` (default) | `'center'` | `'top'` | `'bottom'` | `'right'`

Location of the button icon relative to the button text (if any), specified as one of the values in this table.

Note: The table images reflect the icon location when `HorizontalAlignment` and `VerticalAlignment` are each set to their default value, `'center'`.

Value	Result
`'left'`	
`'right'`	
`'top'`	
`'bottom'`	
`'center'`	

If you specify an empty character vector `('')` for the `Text` property, then the icon aligns as though it is text, according to the values set for `HorizontalAlignment` and `VerticalAlignment`. The `IconAlignment` property value has no effect in this case.

`BackgroundColor` — Background color

`[.96 .96 .96]` (default) | RGB triplet | short name | long name

Background color of the button, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the button.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0 0 1]`

Example: `'b'`

Example: `'blue'`

`Visible` — Visibility of button

`'on'` (default) | `'off'`

Visibility of the button, specified as `'on'` or `'off'`. The `Visible` property determines whether the button is displayed on the screen. If the `Visible` property is set to `'off'`, the entire button is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of button

`[10 40 100 22]` (default) | `[left bottom width height]`

Location and size of the button relative to the button group containing it, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the button group to the outer left edge of the button
`bottom`	Distance from the inner bottom edge of the button group to the outer bottom edge of the button
`width`	Distance between the right and left outer edges of the button
`height`	Distance between the top and bottom outer edges of the button

All measurements are in pixel units.

Example: `[100 100 100 22]`

`InnerPosition` — Inner location and size of button
`[10 10 100 22]` (default) | `[left bottom width height]`

Inner location and size of the button, specified as `[left bottom width height]`. Position values are relative to the button group containing the button. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of button
`[100 100 100 22]]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the button, returned as `[left bottom width height]`. Position values are relative to the button group containing the button. All measurements are in pixel units. This property value is identical to the `Position` property.

Font Style

`FontName` — Font name
system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`Enable` — Operational state of button

`'on'` (default) | `'off'`

Operational state of the button, specified as `'on'` or `'off'`.

- If you set this property to `'on'`, then the appearance of the button indicates that the app user can interact with it.
- If you set this property to `'off'`, then the appearance of the button appears dimmed, indicating that the app user cannot interact with it.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running

callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

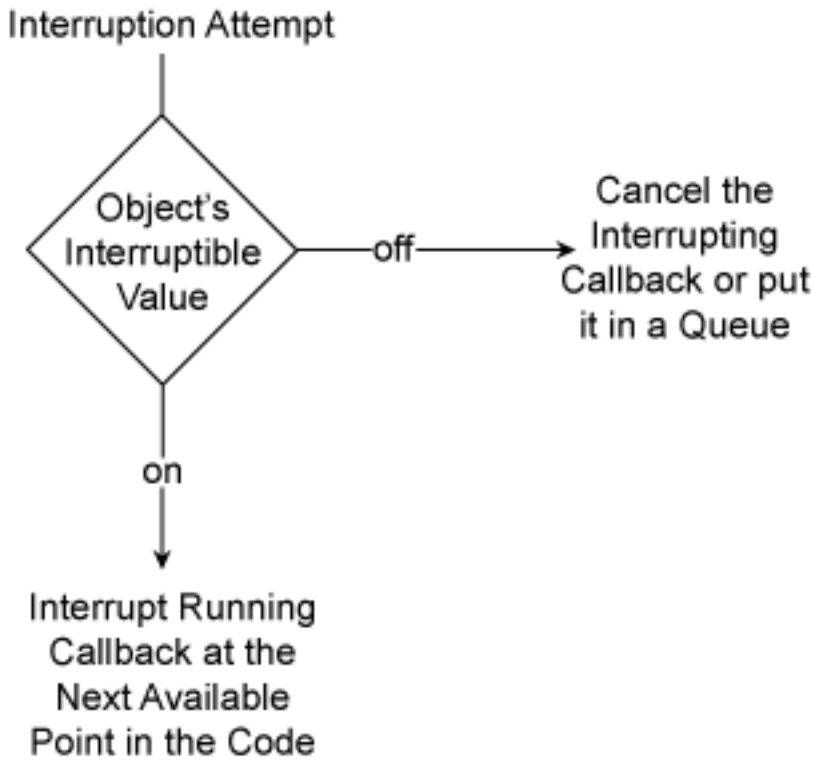

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uitogglebutton'`

This property is read-only.

Type of graphics object, returned as `'uitogglebutton'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'mybutton'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions

include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uibuttongroup` | `uifigure` | `uitogglebutton`

Introduced in R2016a

ToggleSwitch Properties

(App Designer) Control toggle switch appearance and behavior

Compatibility

Valid for toggle switches used in App Designer or in figures created with the `uifigure` function only. Apps created with GUIDE or the `figure` function do not support toggle switch components.

Description

Toggle switches are app components that indicate a logical state. Typically, toggle switches generate an action when the state changes. Properties control the appearance and behavior of a toggle switch. Use dot notation to refer to a particular object and property:

```
f = uifigure;
tswitch = uiswitch(f,'toggle');
val = tswitch.Value;
tswitch.Value = 'On';
```

Value

`Value` — Value of switch

`'Off'` (default) | element or elements of `Items` | element or elements of `ItemsData`

Value of switch, specified as an element of the `Items` or `ItemsData` property value.

- If `ItemsData` is empty, then `Value` is the selected element of `Items`.
- If `ItemsData` is not empty, then `Value` is the element in `ItemsData` that corresponds to the selected element of `Items`.

Programmatic Changes When `ItemsData` Is Empty

Suppose all of the following are true:

- The `Items` property value is `{'Off','On'}`.
- The `ItemsData` value is empty.
- The app user sets the switch to `On` before the programmatic change.

If the `Items` property value changes programmatically to `{'Stop','On'}`, then the element selected before the programmatic change is an element of the updated `Items` property value. In this case, the `Value` remains `'On'` and the switch selection remains **On**.

If the `Items` property value changes programmatically to `{'Stop','Run'}`, then the switch element selected before the programmatic change is not an element of the updated `Items` property value. In this case, the `Value` becomes the first element of the `Items` property value (`'Stop'`) and the switch selection is **Stop**.

Programmatic Changes When `ItemsData` Is Not Empty

Suppose all of the following are true:

- The `Items` value is `{'Off','On'}`.
- The `ItemsData` value is originally `[0 1]`.
- The app user sets the switch to `On` before the programmatic change.

If the `ItemsData` property changes programmatically to `[1 0]`, then the app user selection corresponds to an element of `ItemsData` that is the same before and after the programmatic change (`1`). However, `1` now corresponds to the other `Items` element. So the switch flips, even though `Value` remains unchanged.

If the `ItemsData` property changes programmatically to `[10 100]`, then the app user selection corresponds to an element of `ItemsData` that no longer exists. In this case, `Value` becomes the first element of `ItemsData` (`10`) and the switch selection is **Off**.

`Items` — Options for switch

`{'Off','On'}` (default) | 1-by-2 cell array of character vectors

Options for the switch, specified as a 1-by-2 cell array of character vectors. Duplicate elements are allowed.

`ItemsData` — Data associated with each element of `Items`

empty array ([ ]) (default) | 1-by-2 numeric array | 1-by-2 cell array

Data associated with each element of the `Items` property value, specified as a 1-by-2 numeric array or a 1-by-2 cell array. Duplicate elements are allowed.

For example, if you set the `Items` value to `{'Freezing','Boiling'}`, then you might set the `ItemsData` value to corresponding temperatures in degrees Celsius, `[0,100]`. The `ItemsData` value is not visible to the app user.

Example: `{'One' 'Two'}`

Example: `[10 20]`

Appearance

`Orientation` — Layout position of switch

`'vertical'` (default) | `'horizontal'`

Layout position of the switch, specified as `'vertical'` or `'horizontal'`.

`Visible` — Visibility of switch

`'on'` (default) | `'off'`

Visibility of the switch, specified as `'on'` or `'off'`. The `Visible` property determines whether the switch is displayed on the screen. If the `Visible` property is set to `'off'`, the entire switch is hidden, but you can still specify and access its properties.

To make your app start faster, set the `Visible` property of all components that do not need to appear at startup to `'off'`.

Location and Size

`Position` — Location and size of switch

`[100 100 20 45]` (default) | `[left bottom width height]`

Location and size of the switch, excluding state marks and labels, specified as the vector, `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the switch

Element	Description
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the switch
`width`	Distance between the right and left outer edges of the switch, excluding labels
`height`	Distance between the top and bottom outer edges of the switch, excluding labels

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 200 40 90`

`InnerPosition` — Inner location and size of switch

`[100 100 20 45]` (default) | `[left bottom width height]`

Inner location and size of the switch, excluding state marks and labels, specified as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units. This property value is identical to the `Position` property.

`OuterPosition` — Outer location and size of switch

`[100 80 20 85]` (default) | `[left bottom width height]`

This property is read-only.

Outer location and size of the switch, including state marks and labels, specified as the vector, `[left bottom width height]`. Position values are relative to the parent container. All measurements are in pixel units.

Font Style

`FontName` — Font name

system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size

12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontColor` — Font color

`[0 0 0]` (default) | long name | short name | RGB triplet

Font color, specified as an RGB triplet, long name, or short name.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `[0.4 0.6 0.7]`

`FontWeight` — Font weight

`'normal'` (default) | `'bold'`

Font weight, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than `'normal'`

Not all fonts have a bold font weight. Therefore, specifying a bold font weight can result in the normal font weight.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Setting this property to `italic` selects a slanted version of the font, if it is available on the app user's system.

Interactive Control

`ValueChangedFcn` — Code to execute when switch state changes

`''` (default) | function handle | cell array | character vector

Code to execute when switch state changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace

The app user can change the switch state by doing either of the following:

- Clicking and releasing the mouse button anywhere on the switch (including the state labels)
- Clicking on the switch, dragging, and then releasing the mouse button while still on the switch.

This callback function can access specific information about the user's interaction with the switch. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the switch. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of switch after the app user's most recent interaction with it
`PreviousValue`	Value of switch before the app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the app user clicks the currently selected option, or if the `Value` property setting changes programmatically.

`Enable` — Operational state of switch

`'on'` (default) | `'off'`

Operational state of switch, specified as `'on'` or `'off'`.

If you set this property to `'on'`, the app user can slide the switch.

If you set this property to `'off'`, the switch appears dimmed, indicating that the app user cannot slide the switch and it will not trigger a callback.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running

callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

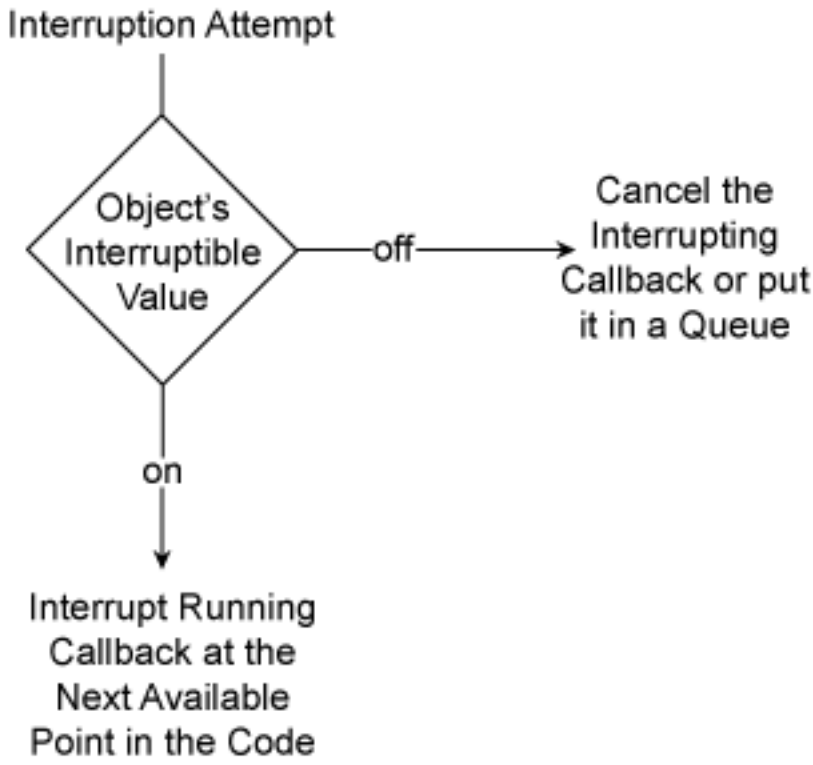

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback.

MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'uitoggleswitch'`

This property is read-only.

Type of graphics object, returned as `'uitoggleswitch'`.

`Tag` — Object identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'myswitch'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`HandleVisibility` — Visibility of object handle

`'on'` (default) | `'callback'` | `'off'`

Visibility of the object handle, specified as `'on'`, `'callback'`, or `'off'`.

This property controls the visibility of the object in its parent's list of children. When an object is not visible in its parent's list of children, it is not returned by functions that obtain objects by searching the object hierarchy or querying properties. These functions

include `get`, `findobj`, `clf`, and `close`. Objects are valid even if they are not visible. If you can access an object, you can set and get its properties, and pass it to any function that operates on objects.

HandleVisibility Value	Description
`'on'`	The object is always visible.
`'callback'`	The object is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the object at the command-line, but allows callback functions to access it.
`'off'`	The object is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the object during the execution of that function.

See Also

See Also

Functions

`appdesigner` | `uifigure` | `uiswitch`

Introduced in R2016a

uialert

(App Designer) Display alert dialog box for UI figure window

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create alert dialog boxes using `errordlg`,`warndlg`, or `msgbox`.

Syntax

```
uialert(figure, message, title)
uialert( ___ ,Name,Value)
```

Description

`uialert(figure, message, title)` displays a modal dialog box in front of the specified UI figure window. The dialog box displays the specified message and has a title bar with the specified title. By default, the dialog box also contains an error icon and an **OK** button.

`uialert( ___ ,Name,Value)` displays a dialog box with properties specified by one or more `Name,Value` pair arguments.

Examples

Alert App User to Error

Create a modal alert dialog box. The figure behind it is inaccessible until you close the dialog box.

```
fig = uifigure;
uialert(fig,'File not found','Invalid File');
```

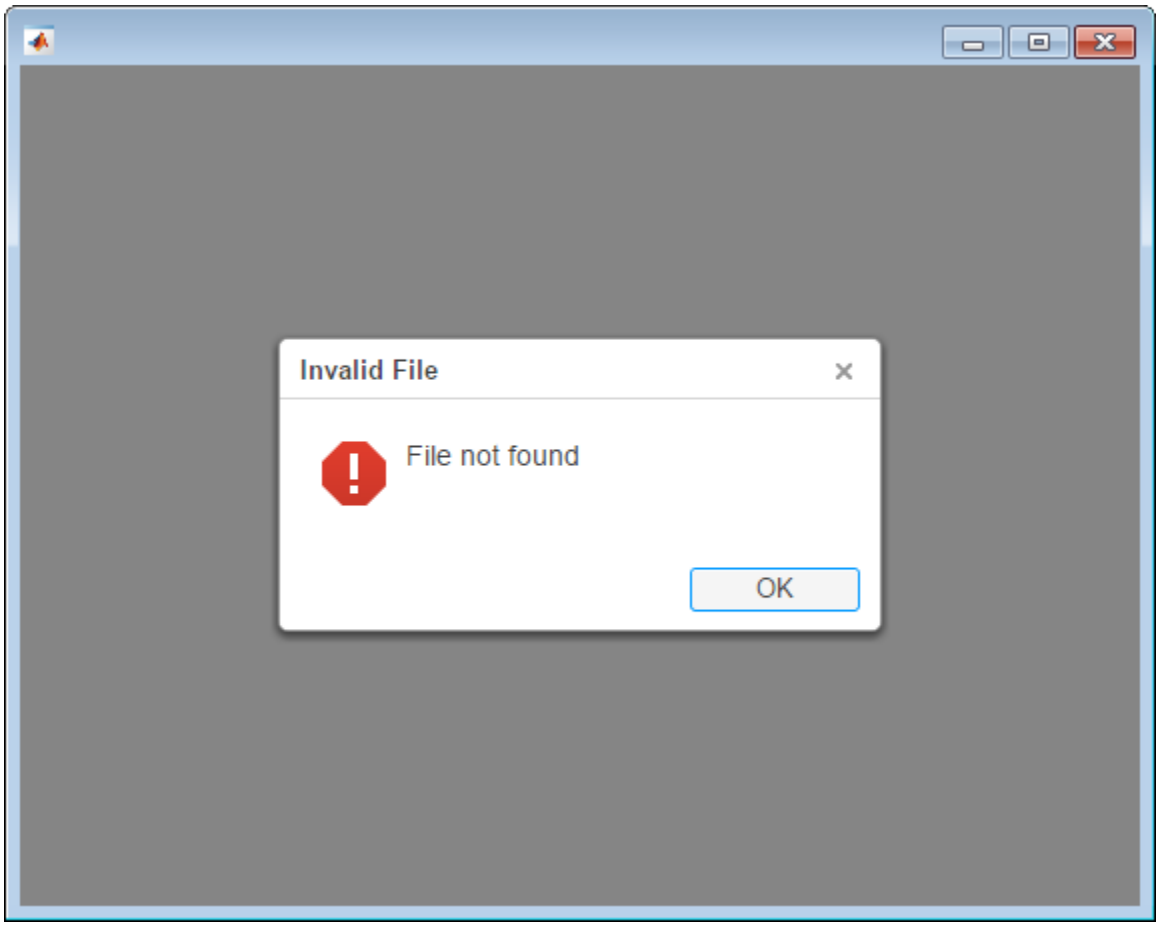

Create Multiline Modal Alert Dialog Box with Warning Icon

```
fig = uifigure;
message = sprintf('Fire hazard! \n Consider reducing temperature.');
uialert(fig,message,'Warning',...
'Icon','warning');
```

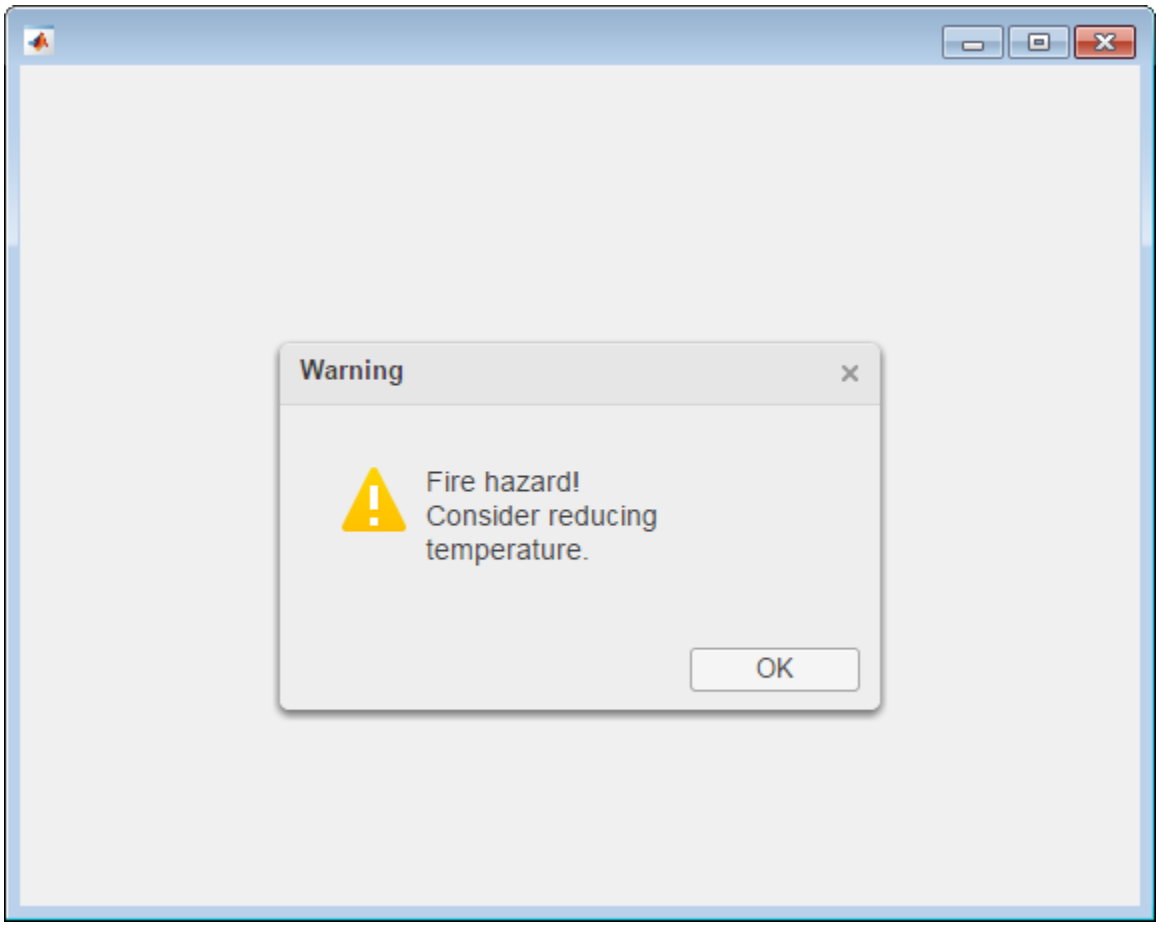

Input Arguments

`figure` — Figure window on which alert dialog box will display
`Figure` object

Figure window on which alert dialog box will display, specified as a `Figure` object returned by the `uifigure` function.

`message` — Text to display in the alert dialog box

character vector | cell array of character vectors

The text to display in the alert dialog box, specified as a character vector or a cell array of character vectors. The message can be any length.

If you specify the message as preformatted character vector using the `sprintf` function, format characters such as the newline character, `\n`, are honored. For instance, you can use `sprintf('first line \n second line')`. A cell array of character vectors is displayed as multiline text, where each row of the array is one line of text.

Example: `'Invalid value'`

`title` — Text to display at the top of the alert dialog box

`'Error'` (default) | character vector

The text to display at the top of the alert dialog box, specified as a character vector. Long titles are truncated and followed by ellipses. The exact length at which a title is truncated depends on your system setup.

If you specify a preformatted character array using `sprintf`, then format characters, such as the newline (`\n`) character and the carriage return character (`\r`) , are replaced by spaces.

Example:

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Icon','warning'`

`'CloseFcn'` — Alert dialog box close request function callback

`''` (default) | function handle | cell array | character vector

The alert dialog box close request callback function, specified as one of these values:

- Function handle.
- Cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.

- Character vector that is a valid MATLAB expression. MATLAB evaluates this expression in the base workspace.

The `CloseFcn` callback executes when the app user dismisses the alert dialog box by clicking the close button in the title bar or clicking the **OK** button. The `CloseFcn` function also executes when the app user closes the figure window for which the alert dialog box displays from the MATLAB command line. You can close a figure window from the command line using the `close` function.

`'Icon'` — Icon for the alert dialog box

`'error'` (default) | `'warning'` | `'info'` | `'success'` | `'none'` | path to a SVG, JPEG, GIF, or PNG image file | m-by-n-by-3 RGB image Cdata matrix

The icon for the alert dialog box, specified as one of the values listed in this table.

Value	Details
`'error'`	Icon is .
`'warning'`	Icon is .
`'info'`	Icon is .
`'success'`	Icon is .
`'none'`	No icon included in the alert dialog box.
Path to a SVG, JPEG, GIF, or PNG image file	Icon is the image at the specified path. Vector format files (SVG images) automatically scale to fit the dialog box best. SVG files are the preferred format to support different resolution systems (for example, high-DPI systems). Raster image formats are displayed in their actual size up to 32 by 32 pixels. Icons that are larger than 32 by 32 pixels are scaled down. Smaller icons are displayed as-is, without scaling up.

Value	Details
m-by-n-by-3 RGB image Cdata matrix	The CData format must be a 3-D array of truecolor RGB triplets. These values can be double-precision values between 0.0 and 1.0 or `uint8` values between 0 and 255. For more information on CData, see Image Properties in the MATLAB Graphics documentation.

An image file name must refer to a file that is discoverable by and accepted by the MATLAB `which` function. For example, the image file name must specify a name and extension of the image file on the MATLAB path or the full path to the image file.

`'Modal'` — Alert dialog box modal state
`'true'` (default) | `'false'`

Alert dialog box modal state with respect to the specified UI figure, specified as `'true'`, `'false'`, `1`, or `0`.

A modal alert dialog box is one that makes the figure inaccessible until the alert dialog box is closed. However, it does not prevent additional dialog boxes from appearing.

See Also

See Also

Functions
`errordlg` | `msgbox` | `uifigure` | `warndlg`

Introduced in R2016a

uiaxes

(App Designer) Create UI axes for plots in App Designer

Compatibility

Use only for creating App Designer UI axes. GUIDE creates axes using the `axes` function. For details, see "Graphics Support in App Designer".

Syntax

```
ax = uiaxes
ax = uiaxes(Name,Value)
ax = uiaxes(parent)
ax = uiaxes(parent,Name,Value)
```

Description

`ax = uiaxes` creates UI axes in a new UI figure window and returns the `UIAxes` object.

`ax = uiaxes(Name,Value)` specifies `UIAxes` property values using one or more `Name,Value` pair arguments.

`ax = uiaxes(parent)` creates the UI axes in the specified parent container. The parent must be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`

`ax = uiaxes(parent,Name,Value)` specifies `UIAxes` property values using one or more `Name,Value` arguments.

Examples

Create Plots in UI Axes

Create a line plot and a scatter plot in UI axes.

Create a UI figure window with UI axes and assign the `UIAxes` object to the variable `ax`. Add a line plot to the axes by specifying the `UIAxes` object as the first input argument for the `plot` function.

```
fig = uiffigure;
ax = uiaxes(fig);
x = linspace(-pi,pi,50);
y = 5*sin(x);
plot(ax,x,y)
```

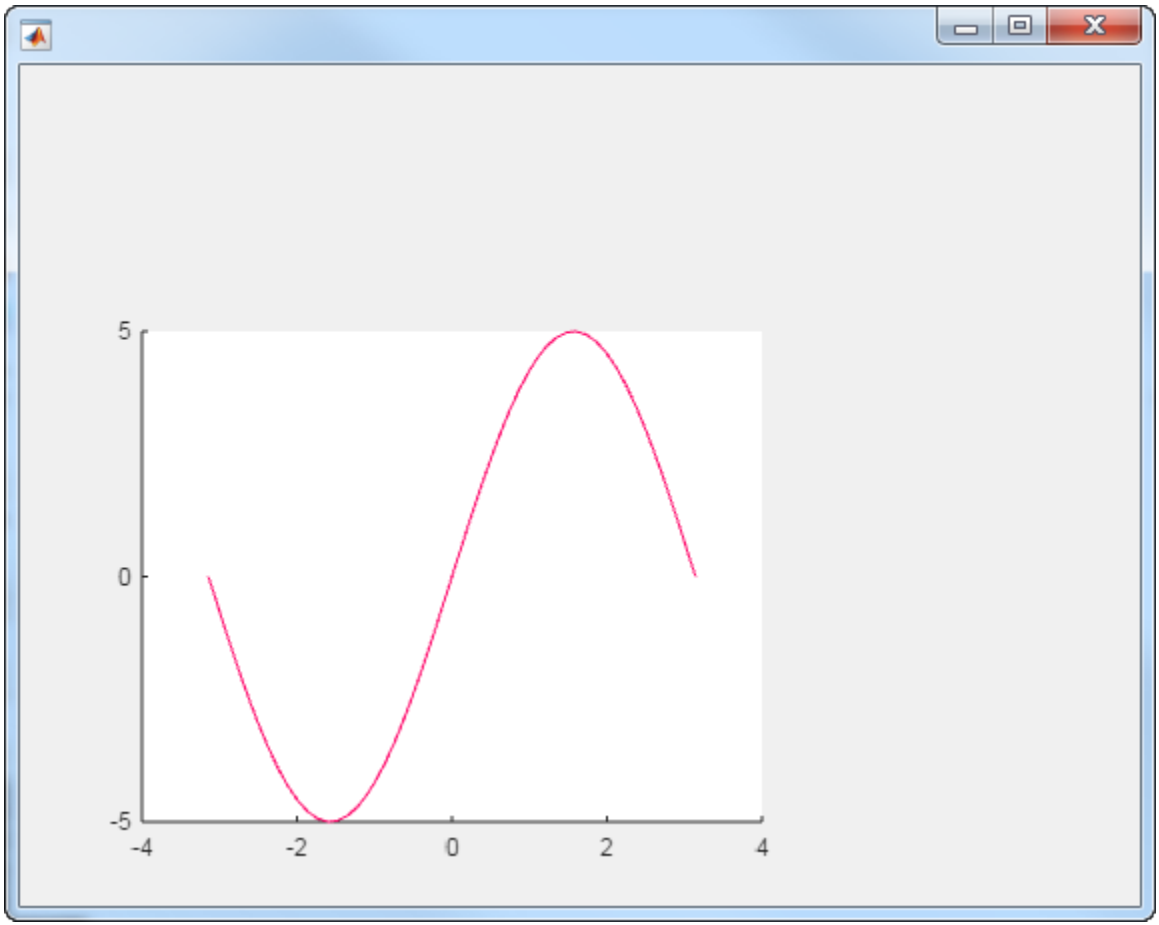

Set the hold state on and add a scatter plot. Specify the `UIAxes` object as the first input argument for the `hold` and `scatter` functions.

```
hold(ax,'on')
y2 = 5*sin(x) + randn(1,50);
scatter(ax,x,y2)
```

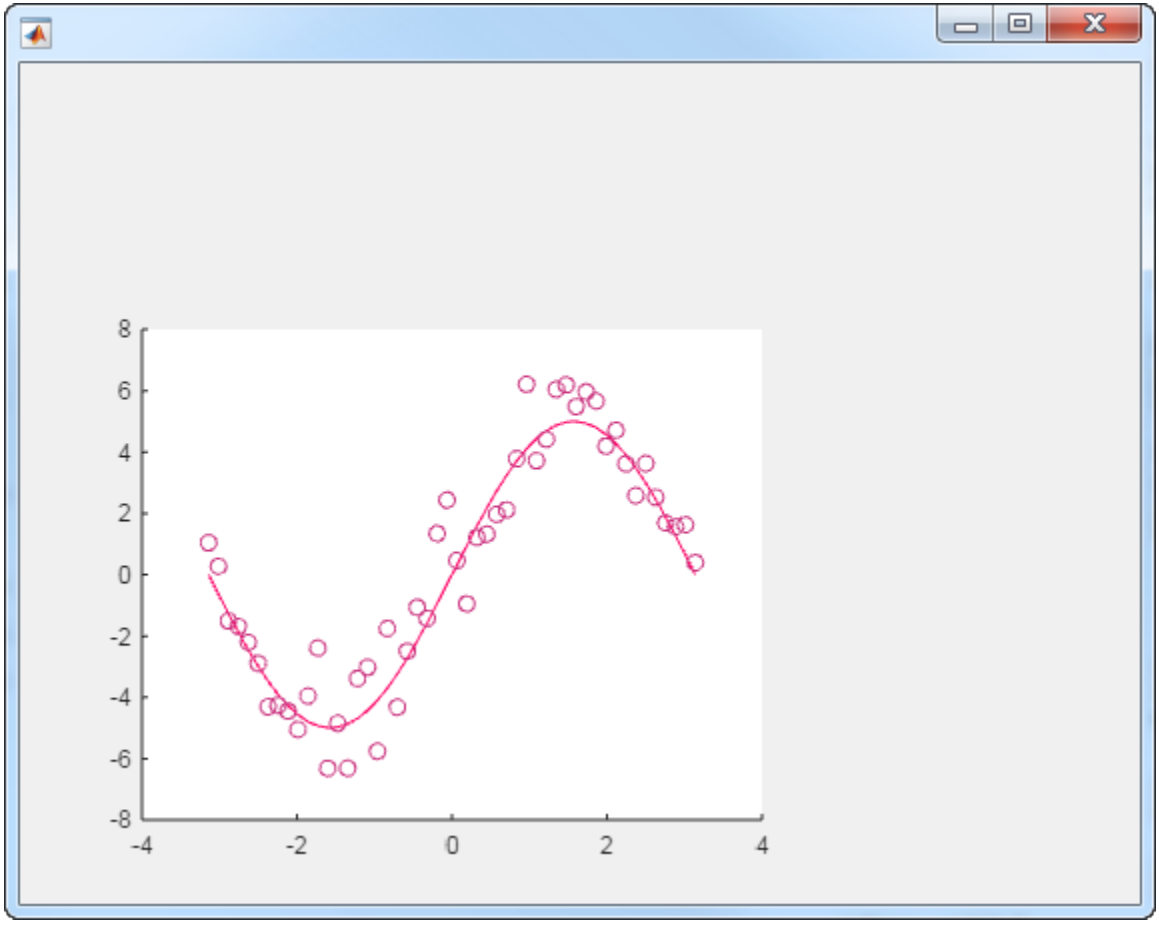

Specify UI Axes Properties

Modify the appearance of the UI axes by setting properties using name-value pair arguments. For example, reverse the *x*-axis direction using the `XDir` name-value pair.

```
fig = uifigure;
ax = uiaxes(fig,'XDir','reverse');
x = linspace(-pi,pi);
y = sin(x);
plot(ax,x,y)
```

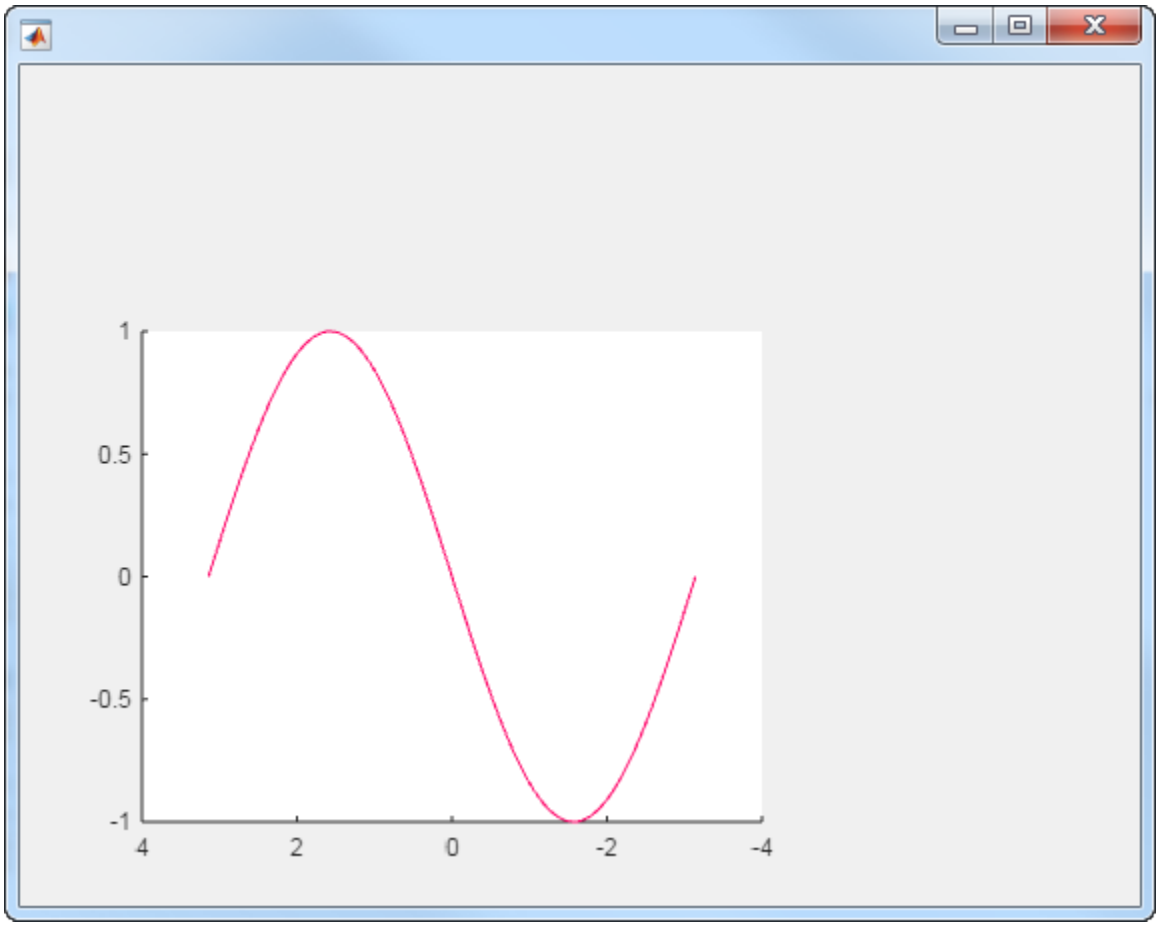

Alternatively, specify properties after the axes is created using dot notation. For example, reverse the *y*-axis direction using dot notation to access the `YDir` property.

```
ax.YDir = 'reverse';
```

Specify UI Axes Position

Specify the UI axes position by setting the `Position` property. Specify the position in pixels.

```
fig = uifigure;
ax = uiaxes(fig,'Position',[10 10 550 400]);
```

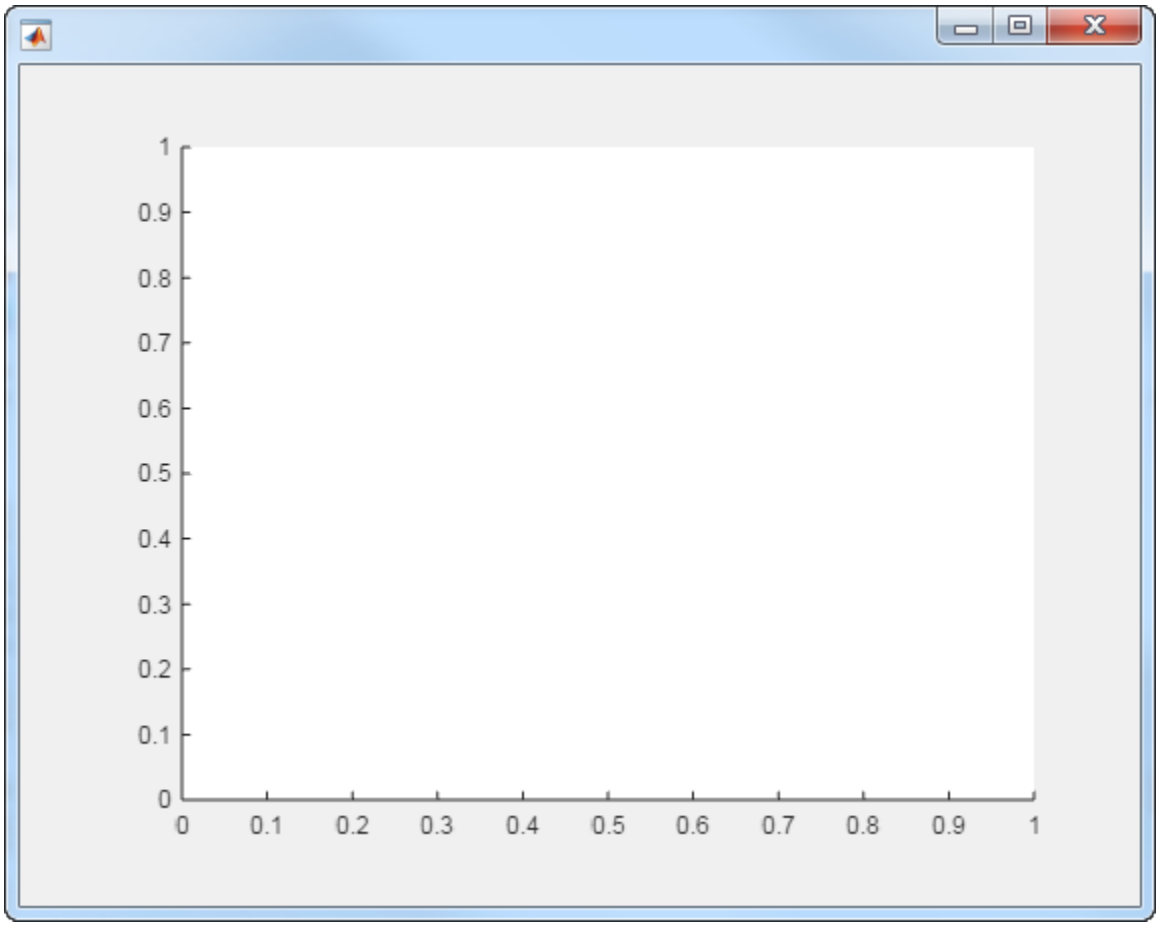

Add UI Axes to Panel

Add UI axes to a panel within a UI figure window. Specify the panel and axes positions in pixels.

```
fig = uifigure;
p = uipanel(fig,'Position',[10 10 400 400]);
ax = uiaxes(p,'Position',[10 10 390 390]);
```

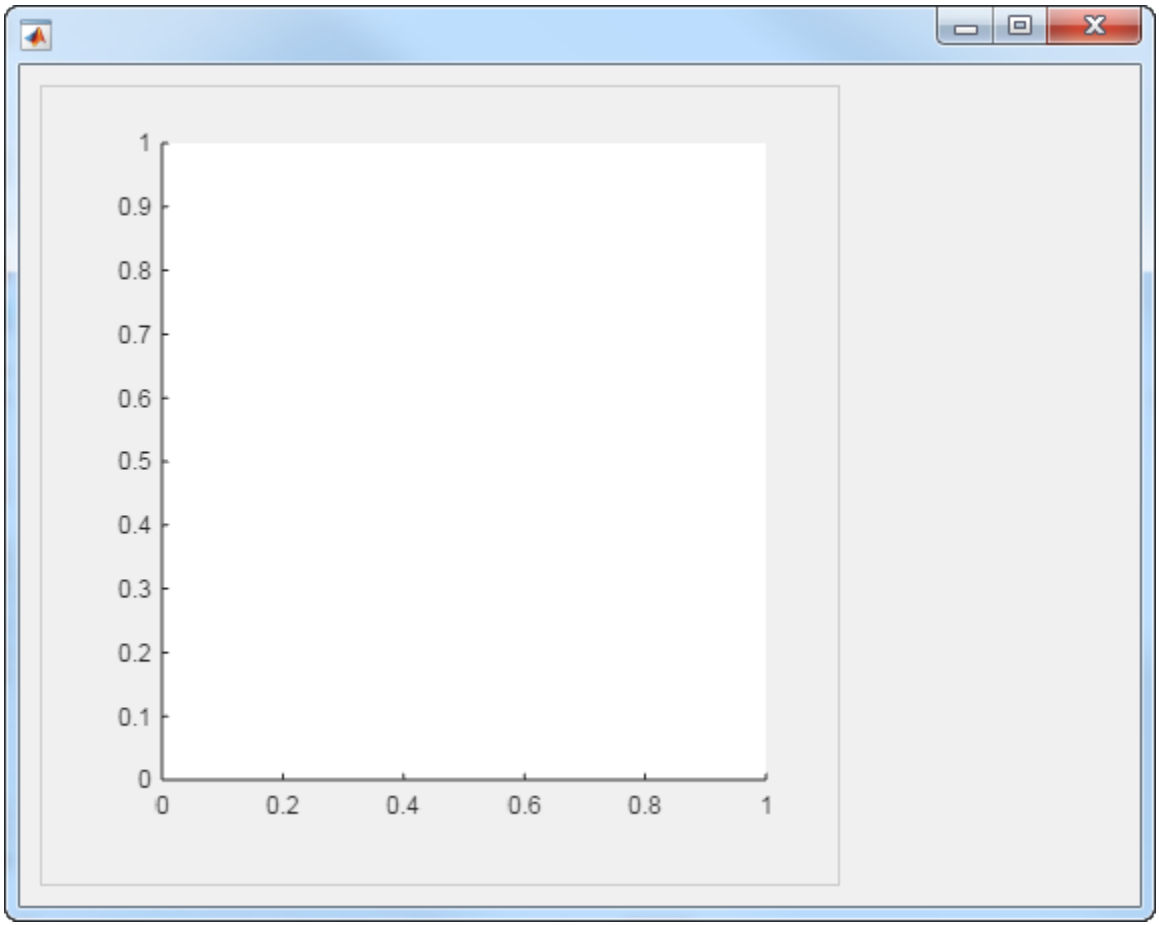

Input Arguments

`parent` — UI axes parent container
figure object (default) | panel object | tab object | button group object

UI axes parent container, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties list here are only a subset. For a full list, see UIAxes Properties.

Example: `'Xscale','linear','YScale','log'`

`'XLim'`, `'YLim'` — Minimum and maximum axis limits

`[0 1]` (default) | two-element vector of the form `[min max]`

Minimum and maximum *x*-axis or *y*-axis limits, specified as a two-element vector of the form `[min max]`.

If the `XLimMode` or `YLimMode` property is set to `'auto'`, then MATLAB chooses the limits for that axis. If you assign a value to this property, then MATLAB sets the mode to `'manual'` and does not automatically compute the limits.

Example: `ax.XLim = [0 10]`

`'XScale'`, `'YScale'` — Scale of values along axis

`'linear'` (default) | `'log'`

Scale of values along axis, specified as `'linear'` or `'log'`.

Example: `ax.XScale = 'linear'`

Example: `ax.YScale = 'log'`

`'GridLineStyle'` — Line style for grid lines

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style used for grid lines, specified as one of values in this table.

Value	Description
`'-'`	Solid line
`'--'`	Dashed line

Value	Description
`':'`	Dotted line
`'-.'`	Dash-dotted line
`'none'`	No line

To display the grid lines, use the `grid on` command or set the `XGrid` or `YGrid` property to `'on'`.

Example: `ax.GridLineStyle = '--'`

`'Position'` — Size and location of axes, including labels and margins

`[10 10 400 300]` (default) | four-element vector

Size and location of axes, including the labels and margins, specified as a four-element vector of the form `[left bottom width height]`. This vector defines a rectangle that encloses the outer bounds of the axes. The `left` and `bottom` elements define the position of the rectangle, measured from the lower left corner to the lower left corner of the parent container. The `width` and `height` define the size of the rectangle. The values are measured in units determined by the `Units` property. By default, the units are pixels.

Output Arguments

`ax` — `UIAxes` object

`UIAxes` object

`UIAxes` object. Use `ax` to set properties of the `UIAxes` after they are created.

Limitations

- On Windows systems, UI axes do not support line width values greater than 0.6 points. If you try to set the line width for objects in the UI axes to a value greater than 0.6 points, then MATLAB returns a warning message and uses 0.6. The line width limit can vary depending on the Windows system display scaling value.

See Also

See Also

Functions
`appdesigner` | `uifigure`

Properties
UIAxes Properties

Introduced in R2016a

UIAxes Properties

(App Designer) Control UI axes appearance and behavior

Compatibility

Valid for axes used in App Designer or figures created with the `uifigure` function. For axes used in GUIDE or apps created with the `figure` function, see Axes Properties.

Description

`UIAxes` properties control the appearance and behavior of a `UIAxes` object. By changing property values, you can modify certain aspects of the axes.

```
ax = uiaxes;
c = ax.Color;
ax.Color = 'blue';
```

Appearance

`Color` — Color of plot area

`[1 1 1]` (default) | RGB triplet | character vector | `'none'`

Color of plot area, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the background color shows through. The color affects the area defined by the `InnerPosition` property value.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`

Long Name	Short Name	RGB Triplet
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Example: `ax.Color = [0 0 1]`

Example: `ax.Color = 'b'`

Example: `ax.Color = 'blue'`

`BackgroundColor` — Color of margin around plot area

`[0.94 0.94 0.94]` (default) | RGB triplet | character vector

Color of margin around plot area, specified as an RGB triplet, or a character vector of a color name. The color affects the margin between the areas defined by the `InnerPosition` and `OuterPosition` property values.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
'yellow'	'y'	[1 1 0]
'magenta'	'm'	[1 0 1]
'cyan'	'c'	[0 1 1]
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]

Long Name	Short Name	RGB Triplet
'black'	'k'	[0 0 0]

Example: `ax.BackgroundColor = [0 0 1]`

Example: `ax.BackgroundColor = 'b'`

Example: `ax.BackgroundColor = 'blue'`

`Box` — Box outline
`'off'` (default) | `'on'`

Box outline, specified as one of these values:

- `'off'` — Do not display the box outline around the axes.
- `'on'` — Display the box outline around the axes.

The `XColor` and `YColor` properties control the color of the outline.

Example: `ax.Box = 'on'`

`LineWidth` — Width of axes outline, tick marks, and grid lines
`0.5` (default) | positive value

Width of axes outline, tick marks, and grid lines, specified as a positive value. Specify the value in point units. One point equals 1/72 inch.

Example: `ax.LineWidth = 1`

Individual Axis Appearance and Scale

`XAxis`, `YAxis` — Component that controls appearance and behavior of each axis
numeric ruler object (default)

Component that controls the appearance and behavior of the *x*-axis or *y*-axis, returned as a numeric ruler object. Modify the appearance and behavior of a particular axis by accessing the associated ruler. For a list of options, see Numeric Ruler Properties.

For example, access the ruler for the *x*-axis through the `XAxis` property. Then, change the `Color` property of the ruler, and thus the color of the *x*-axis, to red. Similarly, change the color of the *y*-axis to green.

```
ax = gca;
```

```
ax.XAxis.Color = 'r';
ax.YAxis.Color = 'g';
```

XAxisLocation — Location of *x*-axis

`'bottom'` (default) | `'top'` | `'origin'`

Location of the *x*-axis, specified as one of these values:

- `'bottom'` — Display the *x*-axis at the bottom of the axes.
- `'top'` — Display the *x*-axis at the top of the axes.
- `'origin'` — Display the *x*-axis so that it passes through the origin point (0,0).

Example: `ax.XAxisLocation = 'origin'`

YAxisLocation — Location of *y*-axis

`'left'` (default) | `'right'` | `'origin'`

Location of *y*-axis, specified as one of these values:

- `'left'` — Display the *y*-axis on the left side of the axes.
- `'right'` — Display the *y*-axis on the right side of the axes.
- `'origin'` — Display the *y*-axis so that it passes through the origin point (0,0).

Example: `ax.YAxisLocation = 'origin'`

XColor, YColor — Color of axis line, tick values, and labels

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector | `'none'`

Color of the axis line, tick values, and labels in the *x* or *y* direction, specified as an RGB triplet, a character vector of a color name, or `'none'`. If you set the color to `'none'`, then the axes outline is invisible.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`

Long Name	Short Name	RGB Triplet
'red'	'r'	[1 0 0]
'green'	'g'	[0 1 0]
'blue'	'b'	[0 0 1]
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

Setting this property sets the associated mode property to manual.

Example: `ax.XColor = [1 1 0]`

Example: `ax.YColor = 'y'`

Example: `ax.ZColor = 'yellow'`

XColorMode, YColorMode — Selection mode for axis line color

'auto' (default) | 'manual'

Selection mode for the axis line color, specified as one of these values:

- 'auto' — Use the default color.
- 'manual' — Use the manually specified color. To specify the color, set the XColor or YColor property.

For related information about grid line colors, see the GridColorMode property.

Example: `ax.XColorMode = 'auto'`

XDir — Direction of increasing values along x-axis

'normal' (default) | 'reverse'

Direction of increasing values along the *x*-axis, specified as one of these values:

- 'normal' — Values increase from left to right
- 'reverse' — Values increase from right to left

Example: `ax.XDir = 'normal'`

YDir — Direction of increasing values along y-axis

'normal' (default) | 'reverse'

Direction of increasing values along the *y*-axis, specified as one of these values:

- `'normal'` — Values increase from bottom to top
- `'reverse'` — Values increase from top to bottom

Example: `ax.YDir = 'reverse'`

`XScale`, `YScale` — Scale of values along axis

`'linear'` (default) | `'log'`

Scale of values along axis, specified as `'linear'` or `'log'`.

Example: `ax.XScale = 'linear'`

Example: `ax.YScale = 'log'`

`XLim`, `YLim` — Minimum and maximum axis limits

`[0 1]` (default) | two-element vector of the form `[min max]`

Minimum and maximum *x*-axis or *y*-axis limits, specified as a two-element vector of the form `[min max]`.

If the `XLimMode` or `YLimMode` property is set to `'auto'`, then MATLAB chooses the limits for that axis. If you assign a value to this property, then MATLAB sets the mode to `'manual'` and does not automatically compute the limits.

Example: `ax.XLim = [0 10]`

`XLimMode`, `YLimMode` — Selection mode for axis limits

`'auto'` (default) | `'manual'`

Selection mode for the axis limits, specified as one of these values:

- `'auto'` — Select axis limits based on the data plotted, that is, the total span of the `XData` or `YData` of all the objects displayed in the axes.
- `'manual'` — Use manually specified axis limits. To specify the axis limits, set the `XLim` or `YLim` property.

Example: `ax.XLimMode = 'auto'`

Tick Values and Labels

`XTick`, `YTick` — Tick mark locations

`[]` (default) | vector of increasing values

Tick mark locations, specified as a vector of increasing values.

If the associated mode property is set to `'auto'`, then MATLAB chooses the tick values. If you assign a value to this property, then MATLAB sets the mode to `'manual'` and does not automatically recompute the tick values.

Example: `ax.XTick = [2 4 6 8 10]`

Example: `ax.YTick = 0:10:100`

Data Types: `single` | `double`

`XTickMode`, `YTickMode` — Selection mode for tick mark locations

`'auto'` (default) | `'manual'`

Selection mode for the tick mark locations, specified as one of these values:

- `'auto'` — Select the tick mark locations based on the range of data for the axis.
- `'manual'` — Use manually specified tick mark locations. To specify the values, set the `XTick` or `YTick` property.

Example: `ax.XTickMode = 'auto'`

`XTickLabel`, `YTickLabel` — Tick mark labels

`''` (default) | cell array of character vectors

Tick mark labels, specified as a cell array of character vectors. If you do not specify enough labels for all the ticks marks, then the labels repeat. Tick mark labels support TeX and LaTeX markup. See the `TickLabelInterpreter` property for more information.

Example: `ax.XTickLabel = {'Jan','Feb','Mar','Apr'}`

`XTickLabelMode`, `YTickLabelMode` — Selection mode for tick mark labels

`'auto'` (default) | `'manual'`

Selection mode for the tick mark labels, specified as one of these values:

- `'auto'` — Label tick marks with numeric values that span the range of the plotted data.
- `'manual'` — Use manually specified tick mark labels. To specify the labels, set the `XTickLabel` or `YTickLabel` property.

Example: `ax.XTickLabelMode = 'auto'`

`XTickLabelRotation`, `YTickLabelRotation` — Rotation of tick labels

`0` (default) | scalar value in degrees

Rotation of tick labels, specified as a scalar value in degrees. Specify a positive value for counterclockwise rotation. Specify a negative value for clockwise rotation.

Example: `ax.XTickLabelRotation = 45`

Example: `ax.YTickLabelRotation = 90`

`TickLabelInterpreter` — Interpretation of tick label characters

`'tex'` (default) | `'none'`

Interpretation of tick label characters, specified as one of these values:

- `'tex'` — Interpret characters using a subset of TeX markup.
- `'none'` — Display literal characters.

Example: `ax.TickLabelInterpreter = 'tex';`

TeX Markup

By default, MATLAB supports a subset of TeX markup. Use TeX markup to add superscripts and subscripts, modify the text type and color, and include special characters in the text.

This table lists the supported modifiers with the `TickLabelInterpreter` property set to `'tex'`. Modifiers remain in effect until the end of the text. Superscripts and subscripts are an exception because they only modify the next character or the text within the curly braces `{}`.

Modifier	Description	Example
`^{ }`	Superscript	`'text^{superscript}'`
`_{ }`	Subscript	`'text_{subscript}'`
`\bf`	Bold font	`'\bf text'`
`\it`	Italic font	`'\it text'`
`\sl`	Oblique font (rarely available)	`'\sl text'`
`\rm`	Normal font	`'\rm text'`

Modifier	Description	Example
`\fontname{specifier}`	Set `specifier` as the name of a font family to change the font style. You can use this in combination with other modifiers.	`'\fontname{Courier} text'`
`\fontsize{specifier}`	Set `specifier` as a scalar numeric value to change the font size.	`'\fontsize{15} text'`
`\color{specifier}`	Set `specifer` as one of these colors: `red`, `green`, `yellow`, `magenta`, `blue`, `black`, `white`, `gray`, `darkGreen`, `orange`, or `lightBlue`.	`'\color{magenta} text'`
`\color[rgb] {specifier}`	Set `specifier` as a three-element RGB triplet to change the font color.	`'\color[rgb] {0,0.5,0.5} text'`

This table lists the supported special characters with the `Interpreter` property set to `'tex'`.

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
`\alpha`	α	`\upsilon`	υ	`\sim`	~
`\angle`	∠	`\phi`	ϕ	`\leq`	≤
`\ast`	*	`\chi`	χ	`\infty`	∞
`\beta`	β	`\psi`	ψ	`\clubsuit`	♣
`\gamma`	γ	`\omega`	ω	`\diamondsuit`	♦
`\delta`	δ	`\Gamma`	Γ	`\heartsuit`	♥
`\epsilon`	ε	`\Delta`	Δ	`\spadesuit`	♠
`\zeta`	ζ	`\Theta`	Θ	`\leftrightarrow`	↔
`\eta`	η	`\Lambda`	Λ	`\leftarrow`	←
`\theta`	θ	`\Xi`	Ξ	`\Leftarrow`	⇐

Character Sequence	Symbol	Character Sequence	Symbol	Character Sequence	Symbol
\vartheta	ϑ	\Pi	Π	\uparrow	↑
\iota	ι	\Sigma	Σ	\rightarrow	→
\kappa	κ	\Upsilon	ϒ	\Rightarrow	⇒
\lambda	λ	\Phi	Φ	\downarrow	↓
\mu	μ	\Psi	Ψ	\circ	°
\nu	ν	\Omega	Ω	\pm	±
\xi	ξ	\forall	∀	\geq	≥
\pi	π	\exists	∃	\propto	∝
\rho	ρ	\ni	∋	\partial	∂
\sigma	σ	\cong	≅	\bullet	•
\varsigma	ς	\approx	≈	\div	÷
\tau	τ	\Re	ℜ	\neq	≠
\equiv	≡	\oplus	⊕	\aleph	ℵ
\Im	ℑ	\cup	∪	\wp	℘
\otimes	⊗	\subseteq	⊆	\oslash	∅
\cap	∩	\in	∈	\supseteq	⊇
\supset	⊃	\lceil	⌈	\subset	⊂
\int	∫	\cdot	·	\o	o
\rfloor	⌋	\neg	¬	\nabla	∇
\lfloor	⌊	\times	x	\ldots	...
\perp	⊥	\surd	√	\prime	´
\wedge	∧	\varpi	ϖ	\O	∅
\rceil	⌉	\rangle	〉	\mid	|
\vee	∨	\langle	〈	\copyright	©

`XMinorTick`, `YMinorTick` — Display of minor tick marks

`'off' | 'on'`

Display of minor tick marks, specified as one of these values:

- `'off'` — Do not display minor tick marks. This is the default value for an axis with a linear scale.
- `'on'` — Display minor tick marks between the major tick marks on the axis. The space between the major tick marks determines the number of minor tick marks. This is the default value for an axis with a log scale.

Example: `ax.XMinorTick = 'on'`

`TickLength` — Tick mark length

`[0.01 0.025]` (default) | two-element vector

Tick mark length, specified as a two-element vector. The first element is the tick mark length in 2-D views. The second element is ignored. Specify the values in units normalized relative to the longest of the visible *x*-axis or *y*-axis.

Example: `ax.TickLength = [0.02 0.035]`

`TickDir` — Tick mark direction

`'in'` (default) | `'out'` | `'both'`

Tick mark direction, specified as one of these values:

- `'in'` — Direct the tick marks inward from the axis lines.
- `'out'` — Direct the tick marks outward from the axis lines.
- `'both'` — Center the tick marks over the axis lines.

If the associated mode property is set to `'auto'`, then MATLAB chooses the tick label direction. If you set this property, then MATLAB sets the mode to `'manual'` and does not automatically choose the tick label direction.

Example: `ax.TickDir = 'out'`

`TickDirMode` — Selection mode for `TickDir`

`'auto'` (default) | `'manual'`

Selection mode for the `TickDir` property, specified as one of these values:

- `'auto'` — Use the default tick direction.
- `'manual'` — Use the manually specified tick mark direction. To specify the tick mark direction, set the `TickDir` property.

Example: `ax.TickDirMode = 'auto'`

Grid Lines

`XGrid`, `YGrid` — Display of grid lines

`'off'` (default) | `'on'`

Display of grid lines, specified as one of these values:

- `'off'` — Do not display the grid lines.
- `'on'` — Display grid lines perpendicular to the axis, for example, along lines of constant *x* or *y* values.

Alternatively, you can use the `grid` function.

Example: `ax.XGrid = 'on'`

`XMinorGrid`, `YMinorGrid` — Display of minor grid lines

`'off'` (default) | `'on'`

Display of minor grid lines, specified as one of these values:

- `'off'` — Do not display grid lines.
- `'on'` — Display grid lines aligned with the minor tick marks of the axis. You do not need to enable minor ticks to display minor grid lines.

Example: `ax.XMinorGrid = 'on'`

`GridLineStyle` — Line style for grid lines

`'-'` (default) | `'--'` | `':'` | `'-.'` | `'none'`

Line style used for grid lines, specified as one of values in this table.

Value	Description
`'-'`	Solid line
`'--'`	Dashed line
`':'`	Dotted line
`'-.'`	Dash-dotted line
`'none'`	No line

To display the grid lines, use the `grid on` command or set the `XGrid` or `YGrid` property to `'on'`.

Example: `ax.GridLineStyle = '--'`

`MinorGridLineStyle` — Line style for minor grid lines

`':'` (default) | `'-'` | `'--'` | `'-.'` | `'none'`

Line style used for minor grid lines, specified as one of the values in this table.

Value	Description
`'-'`	Solid line
`'--'`	Dashed line
`':'`	Dotted line
`'-.'`	Dash-dotted line
`'none'`	No line

To display minor grid lines, use the `grid minor` command or set the `XGridMinor` or `YGridMinor` property to `'on'`.

Example: `ax.MinorGridLineStyle = '-.'`

`GridColor` — Color of grid lines

`[0.15 0.15 0.15]` (default) | RGB triplet | character vector | `'none'`

Color of grid lines, specified as an RGB triplet, a character vector of a color name, or `'none'`.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`

Long Name	Short Name	RGB Triplet
'white'	'w'	[1 1 1]
'black'	'k'	[0 0 0]

To set the colors for the axes box outline, use the `XColor` and `YColor` properties.

Setting this property sets the associated mode property to manual.

Example: `ax.GridColor = [0 0 1]`

Example: `ax.GridColor = 'b'`

Example: `ax.GridColor = 'blue'`

`GridColorMode` — Selection mode for `GridColor`

`'auto'` (default) | `'manual'`

Selection mode for the `GridColor` property, specified as `'auto'` or `'manual'`. The color is based on the values of the `GridColorMode`, `XColorMode` and `YColorMode` properties.

These tables list the grid line colors for different combinations of color modes.

GridColorMode Property	XColorMode Property	x-Axis Grid-Line Color
'auto'	'auto'	Use `GridColor` property.
'auto'	'manual'	Use `XColor` property.
'manual'	'auto'	Use `GridColor` property.
'manual'	'manual'	Use `GridColor` property.

GridColorMode Property	YColorMode Property	y-Axis Grid-Line Color
'auto'	'auto'	Use `GridColor` property.
'auto'	'manual'	Use `YColor` property.
'manual'	'auto'	Use `GridColor` property.
'manual'	'manual'	Use `GridColor` property.

Example: `ax.GridColorMode = 'auto'`

`MinorGridColor` — Color of minor grid lines

`[0.1 0.1 0.1]` (default) | RGB triplet | character vector

Color of minor grid lines, specified as an RGB triplet, a character vector of a color name, or `'none'`.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Example: `ax.MinorGridColor = [0 0 1]`

Example: `ax.MinorGridColor = 'b'`

Example: `ax.MinorGridColor = 'blue'`

`MinorGridColorMode` — Selection mode for `MinorGridColor`
`'auto'` (default) | `'manual'`

Selection mode for the `MinorGridColor` property, specified as `'auto'` or `'manual'`. The minor grid line color is based on the values of the `MinorGridColorMode`, `XColorMode`, and `YColorMode` properties.

These tables list the minor grid line colors for different combinations of color modes.

MinorGridColorMode Property	XColorMode Property	x-Axis Minor Grid-Line Color
`'auto'`	`'auto'`	Use `MinorGridColor` property.

MinorGridColorMode Property	XColorMode Property	x-Axis Minor Grid-Line Color
`'auto'`	`'manual'`	Use `XColor` property.
`'manual'`	`'auto'`	Use `MinorGridColor` property.
`'manual'`	`'manual'`	Use `MinorGridColor` property.

MinorGridColorMode Property	YColorMode Property	y-Axis Minor Grid-Line Color
`'auto'`	`'auto'`	Use `MinorGridColor` property.
`'auto'`	`'manual'`	Use `YColor` property.
`'manual'`	`'auto'`	Use `MinorGridColor` property.
`'manual'`	`'manual'`	Use `MinorGridColor` property.

Example: `ax.MinorGridColorMode = 'auto'`

`GridAlpha` — Grid-line transparency

`0.15` (default) | value in the range `[0,1]`

Grid-line transparency, specified as a value in the range `[0,1]`. A value of `1` means opaque and a value of `0` means completely transparent.

Setting this property sets the associated mode property to manual.

Example: `ax.GridAlpha = 0.5`

`MinorGridAlpha` — Minor grid-line transparency

`0.25` (default) | value in the range `[0,1]`

Minor grid-line transparency, specified as a value in the range `[0,1]`. A value of `1` means opaque and a value of `0` means completely transparent.

Setting this property sets the associated mode property to manual.

Example: `ax.MinorGridAlpha = 0.5`

`Layer` — Placement of grid lines and tick marks in relation to graphic objects
`'bottom'` (default) | `'top'`

Placement of grid lines and tick marks in relation to graphic objects, specified as one of these values:

- `'bottom'` — Display tick marks and grid lines under graphics objects.
- `'top'` — Display tick marks and grid lines over graphics objects.

Example: `ax.Layer = 'top'`

Font Style

`FontName` — Font name
system supported font name

Font name, specified as a system supported font name. The default font depends on the specific operating system and locale.

If the specified font is not available, then MATLAB uses the best match among the fonts available on the system where the app is running.

Example: `'Arial'`

`FontSize` — Font size
12 (default) | positive number

Font size, specified as a positive number. The units of measurement are pixels.

Example: 14

`FontUnits` — Font size units
`'pixels'` (default) | `'inches'` | `'centimeters'` | `'normalized'` | `'points'`

Font size units, specified as one of the values in this table.

Units	Description
`'points'`	Points. One point equals 1/72 inch.
`'inches'`	Inches.

Units	Description
`'centimeters'`	Centimeters.
`'normalized'`	Interpret font size as a fraction of the axes height. If you resize the axes, the font size modifies accordingly. For example, if the `FontSize` is `0.1` in normalized units, then the text is 1/10 of the axes height.
`'pixels'`	Pixels. • On Windows systems, a pixel is 1/96th of an inch. • On Macintosh systems, a pixel is 1/72nd of an inch. • On Linux systems, the size of a pixel is determined by your system resolution.

If you set both the font size and the font units in one function call, you must set the `FontUnits` property first so that the axes correctly interprets the specified font size.

`FontAngle` — Character slant

`'normal'` (default) | `'italic'`

Character slant, specified as `'normal'` or `'italic'`. Not all fonts have both font styles. Therefore, the italic font might look the same as the normal font.

Note: The `'oblique'` value has been removed. Use `'italic'` instead.

`FontWeight` — Thickness of text characters

`'normal'` (default) | `'bold'`

Thickness of the text characters, specified as one of these values:

- `'normal'` — Default weight as defined by the particular font
- `'bold'` — Thicker character outlines than normal

MATLAB uses the `FontWeight` property to select a font from those available on your system. Not all fonts have a bold font weight. Therefore, specifying a bold font weight still can result in the normal font weight.

Note: The `'light'` and `'demi'` font weight values have been removed. Use `'normal'` instead.

Title and Axis Labels

`Title` — Text object for axes title

text object (default)

Text object for the axes title. Use this text object to change properties of the title. For a list of properties, see Text Properties.

```
ax = uiaxes;
ax.Title.String = 'My Graph Title';
ax.Title.FontWeight = 'normal';
```

`XLabel`, `YLabel` — Text object for axis label

text object (default)

Text object for the *x*-axis or *y*-axis label. Use this text object to change properties of the axis label. For a list of properties, see Text Properties.

```
ax = uiaxes;
ax.YLabel.String = 'y-Axis Label';
ax.YLabel.FontSize = 12;
```

`Legend` — Legend associated with the axes

`empty GraphicsPlaceholder` (default) | legend object

This property is read-only.

Legend associated with the axes, specified as a legend object. You can use this property to determine if the axes has a legend.

```
ax = uiaxes;
lgd = ax.Legend
if ~isempty(lgd)
    disp('Legend Exists')
end
```

You also can use this property to access properties of an existing legend. For a list of properties, see Legend Properties.

```
ax = uiaxes;
ax.Legend.TextColor = 'red';
```

Line Colors and Line Styles

`ColorOrder` — Colors for multiline plots

seven predefined colors (default) | three-column matrix of RGB triplets

Colors for multiline plots, specified as a three-column matrix of RGB triplets. Each row of the matrix defines one color in the color order. The default color order has seven colors.

Default Color Order	Associated RGB Triplets
	[0 0.4470 0.7410 0.8500 0.3250 0.0980 0.9290 0.6940 0.1250 0.4940 0.1840 0.5560 0.4660 0.6740 0.1880 0.3010 0.7450 0.9330 0.6350 0.0780 0.1840]

Some graphics functions reset this property to the default value before plotting. To specify the color order, you can change the default value before plotting. For example, this code changes the default value for all future axes.

```
co = [1    0  0.4
    0.8  0.2  0.5
    0.6  0.4  0.6
    0.4  0.6  0.7
    0.2  0.8  0.8
      0    1  0.9];
set(groot,'defaultAxesColorOrder',co)
```

`ColorOrderIndex` — Next color to use in color order

1 (default) | positive integer

Next color to use in the color order, specified as a positive integer. For example, if this property is set to `1`, then the next plot added to the axes uses the first color in the color order. If the index value exceeds the number of colors in the color order, then the index value modulo the number of colors determines the next color used.

If you used a `hold on` command or if the `NextPlot` property of the `UIAxes` is set to `'add'`, then the color order index value increases every time a new plot is added. Reset the color order by setting the `ColorOrderIndex` property to `1`.

Example: `ax.ColorOrderIndex = 5`

`LineStyleOrder` — Line styles and markers for multiline plots

`'-'` solid line (default) | cell array of character vectors

Line styles and markers for multiline plots, specified as a cell array of character vectors. You can combine line and marker specifiers in a single entry.

Example: `{'-*',':','o'}`

MATLAB cycles through the line styles only after using all the colors contained in the ColorOrder property. The default `LineStyleOrder` has only one line style.

Specifier	Line Style
`'-'` (default)	Solid line
`'--'`	Dashed line
`':'`	Dotted line
`'-.'`	Dash-dotted line
`'+'`	Plus sign markers
`'o'`	Circle markers
`'*'`	Star markers
`'.'`	Point markers
`'x'`	Cross markers
`'s'`	Square markers
`'d'`	Diamond markers
`'^'`	Upward-pointing triangle markers
`'v'`	Downward-pointing triangle markers
`'>'`	Right-pointing triangle markers
`'<'`	Left-pointing triangle markers
`'p'`	Five-pointed star (pentagram) markers
`'h'`	Six-pointed star (hexagram) markers

Some graphics functions reset this property to the default value before plotting. To specify the line styles, you can change the default value before plotting. For example, this code changes the default value for all future axes.

```
set(groot,'defaultAxesLineStyleOrder',{'-*',':','o'})
```

`LineStyleOrderIndex` — Next line style to use in line style order

`1` (default) | positive integer

Next line style to use in the line style order, specified as a positive integer. For example, if this property is set to `1`, then the next plot added to the axes uses the first line style in the line style order. If the index value exceeds the number of line styles in the line style order, then the index value modulo the number of line styles determines the next line style used.

If you used a `hold on` command or if the `NextPlot` property of the `UIAxes` is set to `'add'`, then the line style order index value increases every time a new plot is added. Subsequent plots cycle through the line style order. Reset the line style order by setting the `LineStyleOrderIndex` property to `1`.

Example: `ax.LineStyleOrderIndex = 1`

Color and Transparency Mapping

`Colormap` — Colormap for graphics objects

`parula` (default) | `m`-by-3 array of RGB triplets

Colormap for graphics objects, specified as an `m`-by-3 array of RGB (red, green, blue) triplets that define `m` individual colors. MATLAB accesses the colors by their row number. The default colormap is the array returned by the `parula` command.

Example: `uiaxes('Colormap',[1 0 1; 0 0 1; 1 1 0])` sets the color map to three colors: magenta, blue, and yellow.

`Alphamap` — Transparency map for graphics objects

vector of 64 values between `0` and `1` (default) | vector of values between `0` and `1`

Transparency map for graphics objects, specified as a vector of values between `0` and `1`, inclusive. The size of the vector can be `m`-by-1 or 1-by-`m`. MATLAB accesses the alpha values by their index in the vector. Alphamaps can be any length.

`CLim` — Color limits for objects using colormap

`[0 1]` (default) | two-element vector of the form `[cmin cmax]`

Color limits for child objects that use the colormap, specified as a two-element vector of the form `[cmin cmax]`. This property determines how data values map to the colors in the colormap where:

- `cmin` specifies the data value that maps to the first color in the colormap.

- `cmax` specifies the data value that maps to the last color in the colormap.

The axes linearly interpolates data values between `cmin` and `cmax` across the colormap. Values outside this range use either the first or last color, whichever is closest.

For information on changing the colormap, see the `colormap` function. For information on color mapping, see the `caxis` function.

If the associated mode property is set to `'auto'`, then MATLAB chooses the color limits. If you assign a value to this property, then MATLAB sets the mode to `'manual'` and does not automatically choose the color limits.

`CLimMode` — Selection mode for `CLim`

`'auto'` (default) | `'manual'`

Selection mode for the `CLim` property, specified as one of these values:

- `'auto'` — Set the `CLim` property to span the `CData` limits of the graphics objects displayed in the axes.
- `'manual'` — Use the manually specified values. To specify the values, set the `CLim` property. The axes does not change the values when the limits of the axes children change.

`ALim` — Alpha limits for images, patches, and surfaces with transparency

`[0 1]` (default) | two-element vector of the form `[amin amax]`

Alpha limits for images, patches, and surfaces with transparency, specified as a two-element vector of the form `[amin amax]`. This property determines how values in the `AlphaData` properties of image, patch, and surface objects map to the figure's alpha map.

- `amin` specifies the data value mapped to the first alpha value in the alpha map.
- `amax` specifies the data value mapped to the last alpha value in the alpha map.

The axes linearly interpolates data values between `amin` and `amax` across the alpha map. Values outside this range use either the first or last alpha map value, whichever is closest.

The Alphamap property of the figure contains the alpha map.

`ALimMode` — Selection mode for `ALim`

`'auto'` (default) | `'manual'`

Selection mode for the `ALim` property, specified as one of these values:

- `'auto'` — Set the alpha limits to span the `AlphaData` values of the graphics objects in the axes.
- `'manual'` — Use manually specified alpha limits. To specify the alpha limits, set the `ALim` property.

Multiple Plots

`NextPlot` — Properties to reset when adding new plot

`'replacechildren'` (default) | `'add'` | `'replaceall'` | `'replace'`

Properties to reset when adding a new plot to the axes, specified as one of these values:

- `'add'` — Add new plots to the existing axes. Do not delete existing plots or reset `UIAxes` properties before displaying the new plot.
- `'replacechildren'` — Delete existing plots before displaying the new plot. Reset the `ColorOrderIndex` and `LineStyleOrderIndex` properties to `1`, but do not reset other `UIAxes` properties. The next plot added to the axes uses the first color and line style based on the `ColorOrder` and `LineStyle` order properties. This option is similar to using `cla` before every new plot.
- `'replace'` — Delete existing plots and reset all `UIAxes` properties, except `Position` and `Units`, to their default values before displaying the new plot.
- `'replaceall'` — Delete existing plots and reset all `UIAxes` properties, except `Position` and `Units`, to their default values before displaying the new plot. Using this value is similar to using `cla reset` before every new plot.

For axes with only one *y*-axis, the `'replace'` and `'replaceall'` property values are equivalent. For axes with two *y*-axes, the `'replace'` value affects only the active side while the `'replaceall'` value affects both sides.

UI figures also have a `NextPlot` property.

Visibility

`Visible` — State of visibility

`'on'` (default) | `'off'`

State of visibility, specified as one of these values:

- `'on'` — Display the UI axes.
- `'off'` — Hide the UI axes without deleting it. You still can access the object properties when the UI axes is hidden.

`Clipping` — Clipping of objects to axes limits

`'on'` (default) | `'off'`

Clipping of objects to the axes limits, specified as either `'on'` or `'off'`. The clipping behavior of an object in the axes depends on both the `Clipping` property of the `UIAxes` and the `Clipping` property of the object in the `UIAxes`. The `Clipping` property value has these effects:

- `'on'` — Allow each individual object within the axes to control its own clipping behavior based on the `Clipping` property value for the object.
- `'off'` — Disable clipping for all objects within the axes, regardless of the `Clipping` property values for the individual objects. If `Clipping` is set to `'off'`, then parts of objects can appear outside of the axes limits. For example, parts can appear outside the limits if you create a plot, use the `hold on` command, freeze the axis scaling, and then add a plot that is larger than the original plot.

This table lists the results for different combinations of `Clipping` property values.

Clipping Property for Axes Object	Clipping Property for Individual Object	Result
`'on'`	`'on'`	Individual object is clipped. Others might or might not be.
`'on'`	`'off'`	Individual object is not clipped. Others might or might not be.
`'off'`	`'on'`	Individual object and other objects are not clipped.
`'off'`	`'off'`	Individual object and other objects are not clipped.

Note: If a plot contains markers, then as long as the data point lies within the axes, MATLAB draws the entire marker.

`ClippingStyle` — Boundaries used for clipping

`'3dbox'` (default) | `'rectangle'`

Boundaries used for clipping, specified as one of these values:

- `'3dbox'` — Clip plots to the axes limits. If a plot uses thick lines, then draw the lines using the full line width even if part of the line width is outside the axes.
- `'rectangle'` — Clip plots to the plot box that encloses the axes. Clip the line width of thick lines at the limits.

The `ClippingStyle` property has no effect if the `Clipping` property is set to `'off'`.

Location and Size

`Position` — Size and location of axes, including labels and margins

`[10 10 400 300]` (default) | four-element vector

Size and location of axes, including the labels and margins, specified as a four-element vector of the form `[left bottom width height]`. This vector defines a rectangle that encloses the outer bounds of the axes. The `left` and `bottom` elements define the position of the rectangle, measured from the lower left corner to the lower left corner of the parent container. The `width` and `height` define the size of the rectangle. The values are measured in units determined by the `Units` property. By default, the units are pixels.

`OuterPosition` — Size and location of axes, including labels and margins

`[10 10 400 300]` (default) | four-element vector

Size and location of the axes, including the labels and margins, specified as a four-element vector of the form `[left bottom width height]`. Position values are relative to the parent container. By default, the values are measured in pixels.

This property value is identical to the `Position` property value.

`InnerPosition` — Size and position of inner axes, excluding labels and margins

`[62 43 310 244.5]` (default) | four-element vector

This property is read-only.

Size and position of the inner axes, excluding labels and margins, returned as a four-element vector of the form `[left bottom width height]`. The `left` and `bottom` elements define the position of the rectangle, measured from the lower left corner to

the lower left corner of the parent container. The `width` and `height` define the size of the rectangle. The values are measured in units determined by the `Units` property. By default, the units are pixels.

MATLAB automatically sets `InnerPosition` to the largest possible values that conform to all other properties. Other `UIAxes` properties that affect the axes size and shape include Position, DataAspectRatio and PlotBoxAspectRatio.

`TightInset` — Margin for text labels

four-element vector of the form `[left bottom right top]`

This property is read-only.

Margin for text labels, specified as a four-element vector of the form `[left bottom right top]`. The elements define the distances between the bounds of the `InnerPosition` property and the extent of the axes text labels and title. By default, the values are measured in pixels. To change the units, set the `Units` property.

`Units` — Position units

`'pixels'` (default)

Position units, specified as `'pixels'`.

- On Windows systems, a pixel is 1/96th of an inch.
- On Macintosh systems, a pixel is 1/72nd of an inch.
- On Linux systems, the size of a pixel is determined by your system resolution.

`SizeChangedFcn` — UI axes resize callback function

`''` (default) | function handle | cell array | character vector

UI axes resize callback function, specified as one of these values:

- Function handle
- Cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- Character vector that is a valid MATLAB expression. MATLAB evaluates this expression in the base workspace.

Define this callback function to control the layout when the size of the UI axes change.

The `SizeChangedFcn` callback executes under these circumstances:

- The axes becomes visible for the first time.
- The axes is visible while its drawable area changes. The drawable area is the area inside the outer bounds of the axes.
- The axes becomes visible for the first time after its drawable area changes. This situation occurs when the drawable area changes while the axes is invisible, and then it becomes visible later.

These are some of the important characteristics of the `SizeChangedFcn` callback and some recommended best practices:

- Consider delaying the display of the figure until after all the variables that the callback uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the figure, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- Use the `gcbo` function in your `SizeChangedFcn` code to get the `UIAxes` object that is resizing.

Example: `@myfun`

Example: `{@myfun,x}`

Aspect Ratio

`DataAspectRatio` — Relative length of data units along each axis

`[1 1 1]` (default) | three-element vector of the form `[dx dy dz]`

Relative length of data units along each axis, specified as a three-element vector of the form `[dx dy dz]`. This vector defines the relative *x*, *y*, and *z* data scale factors. For example, specifying this property as `[1 2 1]` sets the length of one unit of data in the *x*-direction to be the same length as two units of data in the *y*-direction and one unit of data in the *z*-direction.

If `DataAspectRatioMode` is set to `'auto'`, then MATLAB chooses the aspect ratio. If you specify the aspect ratio, then MATLAB sets the `DataAspectRatioMode` to `'manual'` and disables the “stretch-to-fill” behavior.

Example: `[1 1 1]`

`DataAspectRatioMode` — Selection mode for `DataAspectRatio`

`'auto'` (default) | `'manual'`

Selection mode for the `DataAspectRatio` property, specified as one of these values:

- `'auto'` — Use values that make best use of the available space.
- `'manual'` — Use the manually specified values and disable the "stretch-to-fill" behavior. To specify the values, set the `DataAspectRatio` property.

  This table describes the behavior for various combinations of properties when you disable the stretch-to-fill behavior.

XLimitMode, YLimitMode, and ZLimitMode	DataAspectRatioMode	PlotBoxAspectRatioMode	Behavior
`'auto'`	`'auto'`	`'auto'`	MATLAB chooses limits that span the data range in all dimensions.
`'auto'`	`'auto'`	`'manual'`	MATLAB chooses limits that span the data range in all dimensions, and modifies `DataAspectRatio` to achieve the specified `PlotBoxAspectRatio` within those limits.
`'auto'`	`'manual'`	`'auto'`	MATLAB chooses limits that span the data range in all dimensions, and modifies `PlotBoxAspectRatio` to achieve the specified `DataAspectRatio` within those limits.
`'auto'`	`'manual'`	`'manual'`	MATLAB chooses limits that completely fit and center the plot within the specified `PlotBoxAspectRatio`

XLimitMode, YLimitMode, and ZLimitMode	DataAspectRatioMode	PlotBoxAspectRatioMode	Behavior
			given the specified `DataAspectRatio`. This might produce empty space around 2 of the 3 dimensions.
`'manual'`	`'auto'`	`'auto'`	MATLAB honors the specified limits and modifies the `DataAspectRatio` and `PlotBoxAspectRatio` as necessary.
`'manual'`	`'auto'`	`'manual'`	The axes honors the specified limits and `PlotBoxAspectRatio` values, and modifies the `DataAspectRatio` values as necessary.
`'manual'`	`'manual'`	`'auto'`	The axes honors the specified limits and `DataAspectRatio` values and modifies the `PlotBoxAspectRatio` values as necessary.
One set to `'manual'` and two set to `'auto'`	`'manual'`	`'manual'`	MATLAB selects the limits to honor the specified aspect ratios and specified limits.
Two set to `'manual'` and one set to `'auto'`, or all three set to `'manual'`	`'manual'`	`'manual'`	MATLAB ignores the `PlotBoxAspectRatio` value and uses the specified limits and `DataAspectRatio`.

`PlotBoxAspectRatio` — Relative length of each axis

`[1 1 1]` (default) | three-element vector of the form `[px py pz]`

Relative length of each axis, specified as a three-element vector of the form `[px py pz]` defining the relative *x*-axis, *y*-axis, and *z*-axis scale factors. The plot box is a box enclosing the axes data region as defined by the axis limits.

If the `PlotBoxAspectRatioMode` property is set to `'auto'`, then MATLAB chooses the aspect ratio. If you specify the aspect ratio, then MATLAB sets `PlotBoxAspectRatioMode` to `'manual'` and disables the "stretch-to-fill" behavior.

Example: `[1 0.75 0.75]`

`PlotBoxAspectRatioMode` — Selection mode for `PlotBoxAspectRatio`
`'auto'` (default) | `'manual'`

Selection mode for the `PlotBoxAspectRatio` property, specified as one of these values:

- `'auto'` — Use values that make best use of the space available.
- `'manual'` — Use the manually specified values and disable the "stretch-to-fill" behavior. To specify the values, set the `PlotBoxAspectRatio` property.

This table describes the behavior for various combinations of properties when you disable the stretch-to-fill behavior.

XLimitMode, YLimitMode, and ZLimitMode	DataAspectRatioMode	PlotBoxAspectRatioMode	Behavior
`'auto'`	`'auto'`	`'auto'`	MATLAB chooses limits that span the data range in all dimensions.
`'auto'`	`'auto'`	`'manual'`	MATLAB chooses limits that span the data range in all dimensions, and modifies `DataAspectRatio` to achieve the specified `PlotBoxAspectRatio` within those limits.
`'auto'`	`'manual'`	`'auto'`	MATLAB chooses limits that span the data range in

XLimitMode, YLimitMode, and ZLimitMode	DataAspectRatioMode	PlotBoxAspectRatioMode	Behavior
			all dimensions, and modifies `PlotBoxAspectRatio` to achieve the specified `DataAspectRatio` within those limits.
`'auto'`	`'manual'`	`'manual'`	MATLAB chooses limits that completely fit and center the plot within the specified `PlotBoxAspectRatio` given the specified `DataAspectRatio`. This might produce empty space around 2 of the 3 dimensions.
`'manual'`	`'auto'`	`'auto'`	MATLAB honors the specified limits and modifies the `DataAspectRatio` and `PlotBoxAspectRatio` as necessary.
`'manual'`	`'auto'`	`'manual'`	The axes honors the specified limits and `PlotBoxAspectRatio` values, and modifies the `DataAspectRatio` values as necessary.
`'manual'`	`'manual'`	`'auto'`	The axes honors the specified limits and `DataAspectRatio` values and modifies the `PlotBoxAspectRatio` values as necessary.

XLimitMode, YLimitMode, and ZLimitMode	DataAspectRatioMode	PlotBoxAspectRatioMode	Behavior
One set to `'manual'` and two set to `'auto'`	`'manual'`	`'manual'`	MATLAB selects the limits to honor the specified aspect ratios and specified limits.
Two set to `'manual'` and one set to `'auto'`, or all three set to `'manual'`	`'manual'`	`'manual'`	MATLAB ignores the `PlotBoxAspectRatio` value and uses the specified limits and `DataAspectRatio`.

Identifiers

`Type` — Type of graphics object

`'axes'`

This property is read-only.

Type of graphics object returned as `'axes'`.

`Tag` — Tag to associate with the `UIAxes`

`''` (default) | character vector

Tag to associate with the `UIAxes`, specified as a character vector. Tags provide a way to identify graphics objects. Use this property to find all objects with a specific tag within a plotting hierarchy, for example, searching for the tag using `findobj`.

Example: `'January Data'`

`UserData` — Data to associate with the `UIAxes`

`[]` (default) | any MATLAB data

Data to associate with the `UIAxes` object, specified as any MATLAB data, for example, a scalar, vector, matrix, cell array, character array, table, or structure. MATLAB does not use this data.

To associate multiple sets of data or to attach a field name to the data, use the `getappdata` and `setappdata` functions.

Example: `1:100`

Parent/Child

`Parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`Children` — Children of the UI axes

empty `GraphicsPlaceholder` array | array of graphics objects

Children of the UI axes, returned as an array of graphics objects. Use this property to view a list of the children or to reorder the children by setting the property to a permutation of itself.

You cannot add or remove children using the `Children` property of the UI axes. To add a child to this list, set the `Parent` property of the child graphics object to the UI axes object.

`HandleVisibility` — Visibility of the UI axes object handle

`'on'` (default) | `'off'` | `'callback'`

Visibility of the UI axes object handle in the `Children` property of the parent, specified as one of these values:

- `'on'` — The UI axes object handle is always visible.
- `'off'` — The UI axes object handle is invisible at all times. This option is useful for preventing unintended changes to the UI by another function. Set the `HandleVisibility` to `'off'` to temporarily hide the handle during the execution of that function.
- `'callback'` — The UI axes object handle is visible from within callbacks or functions invoked by callbacks, but not from within functions invoked from the command line. This option blocks access to the UI axes at the command-line, but allows callback functions to access it.

If the UI axes object is not listed in the `Children` property of the parent, then functions that obtain object handles by searching the object hierarchy or querying handle

properties cannot return it. This includes `get`, `findobj`, `gca`, `gcf`, `gco`, `newplot`, `cla`, `clf`, and `close`.

Hidden object handles are still valid. Set the root `ShowHiddenHandles` property to `'on'` to list all object handles regardless of their `HandleVisibility` property setting.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.

- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the UI axes is the running callback, then the `Interruptible` property determines if it another callback can interrupt it:

- `'on'` — Interruptible. Interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `figure`, `getframe`, `waitfor`, or `pause` command.

  - If the running callback contains one of these commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes. For more information, see “Interrupt Callback Execution”.
  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.

- `'off'` — Not interruptible. MATLAB finishes executing the running callback without any interruptions.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks.

Note: There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt a running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put in the queue.

If the `ButtonDownFcn` callback of the UI axes tries to interrupt a running callback that cannot be interrupted, then the `BusyAction` property determines if it is discarded or put in the queue. Specify the `BusyAction` property as one of these values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution. This is the default behavior.
- `'cancel'` — Discard the interrupting callback.

Creation and Deletion Control

`CreateFcn` — Creation callback

`''` (default) | function handle | cell array | character vector

Creation callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you create the UI axes. Setting the `CreateFcn` property on an existing UI axes has no effect. You must define a default value for this property, or define this property using a `Name,Value` pair during UI axes creation. MATLAB executes the callback after creating the UI axes and setting all of its properties.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- The UI axes object — You can access properties of the UI axes object from within the callback function. You also can access the UI axes object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.
- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`DeleteFcn` — Deletion callback

`''` (default) | function handle | cell array | character vector

Deletion callback, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB command or function, which is evaluated in the base workspace (not recommended)

Use this property to execute code when you delete the UI axes. MATLAB executes the callback before destroying the UI axes so that the callback can access its property values.

If you specify this callback using a function handle, then MATLAB passes two arguments to the callback function when executing the callback:

- The UI axes object — You can access properties of the UI axes object from within the callback function. You also can access the UI axes object through the `CallbackObject` property of the root, which can be queried using the `gcbo` function.

- Event data — This argument is empty for this property. Replace it with the tilde character (~) in the function definition to indicate that this argument is not used.

For more information on how to use function handles to define callback functions, see "Callback Definition".

Example: `@myCallback`

Example: `{@myCallback,arg3}`

`BeingDeleted` — Deletion status of the UI axes

`'off'` (default) | `'on'`

Deletion status of the UI axes, returned as `'on'` or `'off'`. MATLAB sets the `BeingDeleted` property to `'on'` when the delete function of the UI axes begins execution (see the `DeleteFcn` property). The `BeingDeleted` property remains set to `'on'` until the UI axes no longer exists.

Check the value of the `BeingDeleted` property to verify that the UI axes is not about to be deleted before querying or modifying it.

See Also

See Also

`uiaxes`

Introduced in R2016a

uibutton

(App Designer) Create push button or state button component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create a button using `uicontrol`.

Syntax

```
btn = uibutton
btn = uibutton(style)
btn = uibutton(parent)
btn = uibutton(parent,style)
btn = uibutton( ___ ,Name,Value)
```

Description

`btn = uibutton` creates a push button in a new UI figure window and returns the `Button` object.

`btn = uibutton(style)` creates a button of the specified style.

`btn = uibutton(parent)` creates the button in the specified parent container. The parent container must be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`btn = uibutton(parent,style)` creates a `Button` of the specified style in the specified parent object.

`btn = uibutton( ___ ,Name,Value)` creates a `Button` with properties specified by one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`style` — Type of button

`'push'` (default) | `'state'`

Type of button, specified as one of the following:

- `'push'`

  When clicked once, the button appears to press and release.
- `'state'`

  When clicked once, the button remains in the pressed or released state until it is clicked again.

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example:

Each type of `Button` object supports a different set of properties. For a full list of properties and descriptions for each type, see the associated property page.

- If `style` is the default, `'push'`, see Button Properties
- If `style` is `'state'`, see StateButton Properties

Examples

Create a Button

Create a push button.

```
fig = uifigure;
btn = uibutton(fig);
```

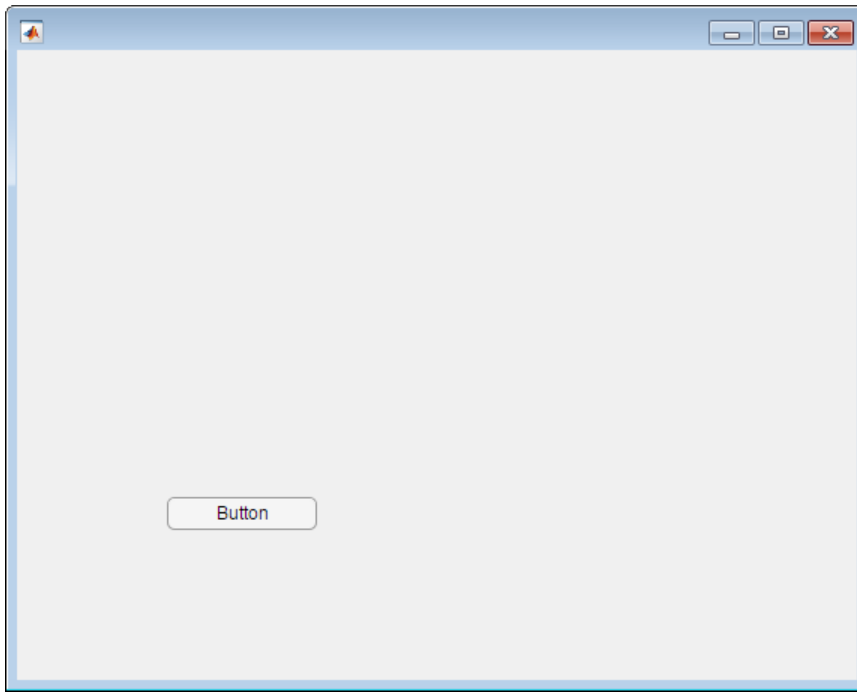

Create a State Button

Create a state button by specifying the style as `'state'`.

```
fig = uifigure;
btn = uibutton(fig,'state');
```

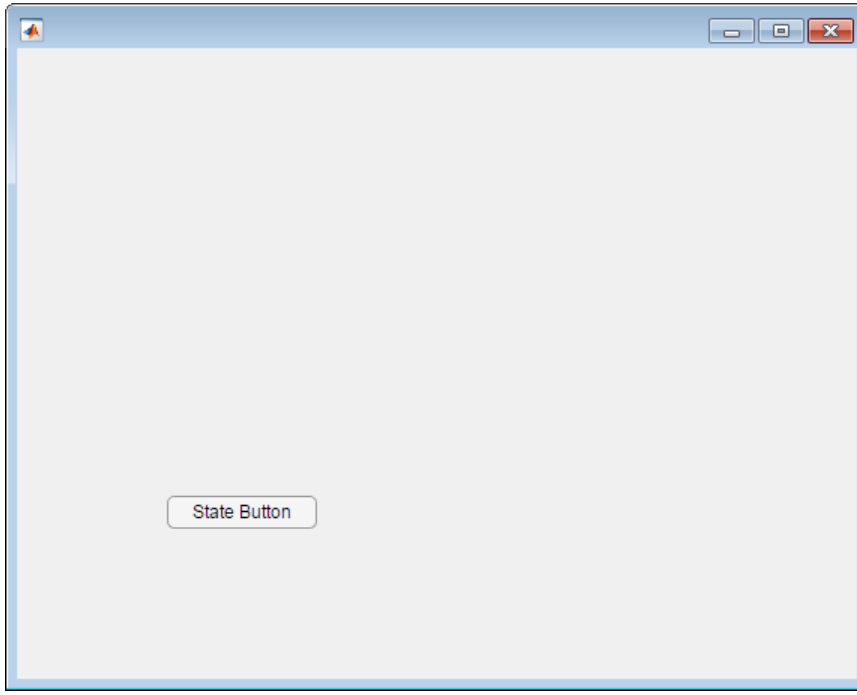

Create a Button in a Panel

```
fig = uifigure('Name','My Figure');
pnl = uipanel(fig);
btn = uibutton(pnl);
```

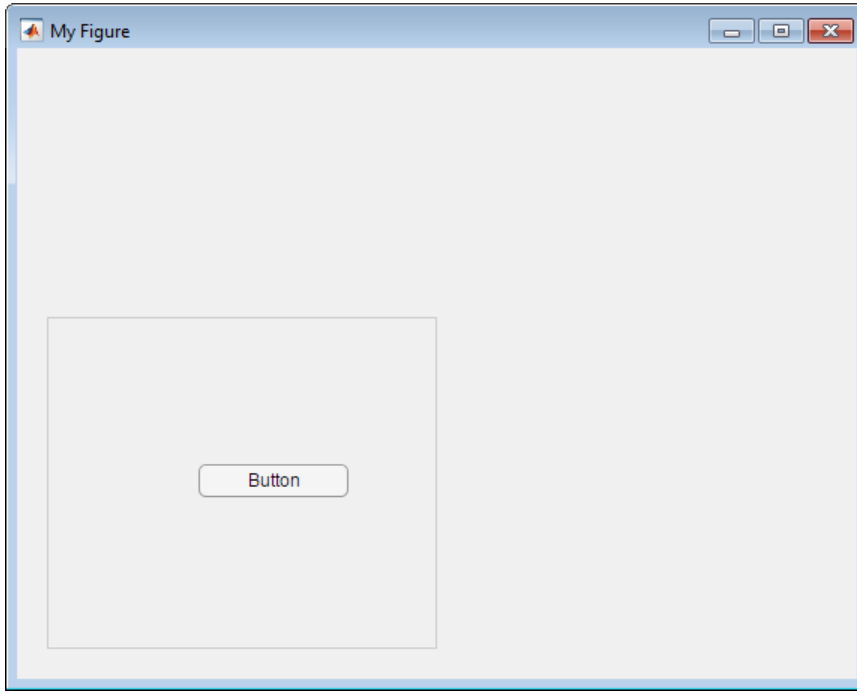

Set and Access Button Property Values

Create a state button and specify property values.

```
fig = uifigure;
btn = uibutton(fig,'state',...
               'Text', 'Record',...
               'Value', true,...
               'Position',[50,100, 100, 22]);
```

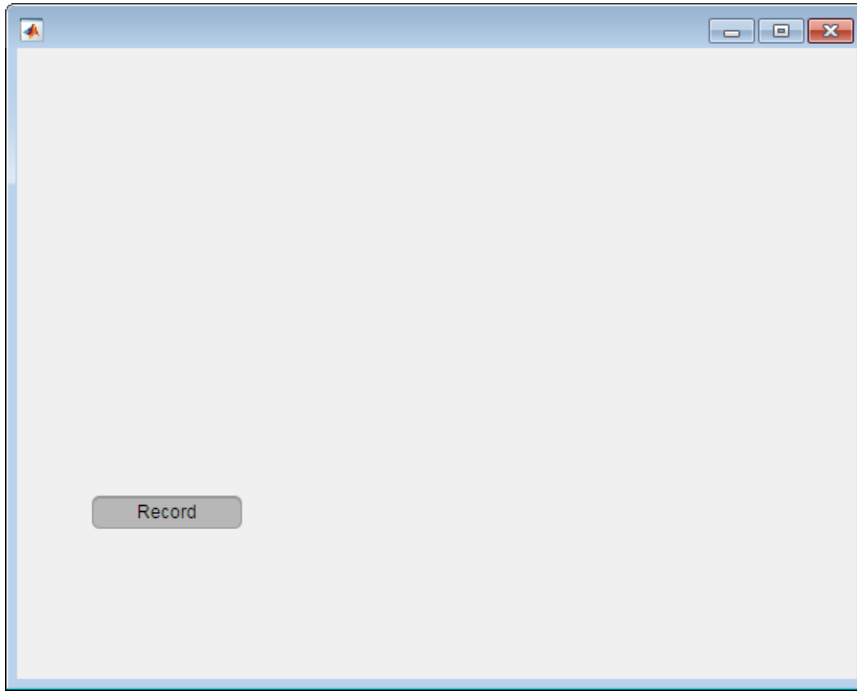

Determine the font name of the state button text.

```
fname = btn.FontName
```

```
fname =

Helvetica
```

Change the font name of the button text.

```
btn.FontName = 'Arial Narrow';
```

Code Response to Button Click

Create a button and a UI axes. When the app user presses the button, a graph is created.

Create `buttonPlot.m` on your MATLAB path. This code creates a window containing a button and a UI axes. When the app user clicks the button, the `ButtonPushedFcn` plots some data.

```
function buttonPlot
% Create a UI figure window
fig = uifigure;

% Create a UI axes
ax = uiaxes('Parent',fig,...
            'Units','pixels',...
            'Position', [104, 123, 300, 201]);

% Create a push button
btn = uibutton(fig,'push',...
               'Position',[420, 218, 100, 22],...
               'ButtonPushedFcn', @(btn,event) plotButtonPushed(btn,ax));
end

% Create the function for the ButtonPushedFcn callback
function plotButtonPushed(btn,ax)
        x = linspace(0,2*pi,100);
        y = sin(x);
        plot(ax,x,y)
end
```

Run `buttonPlot`, and then click the push button. MATLAB plots the data.

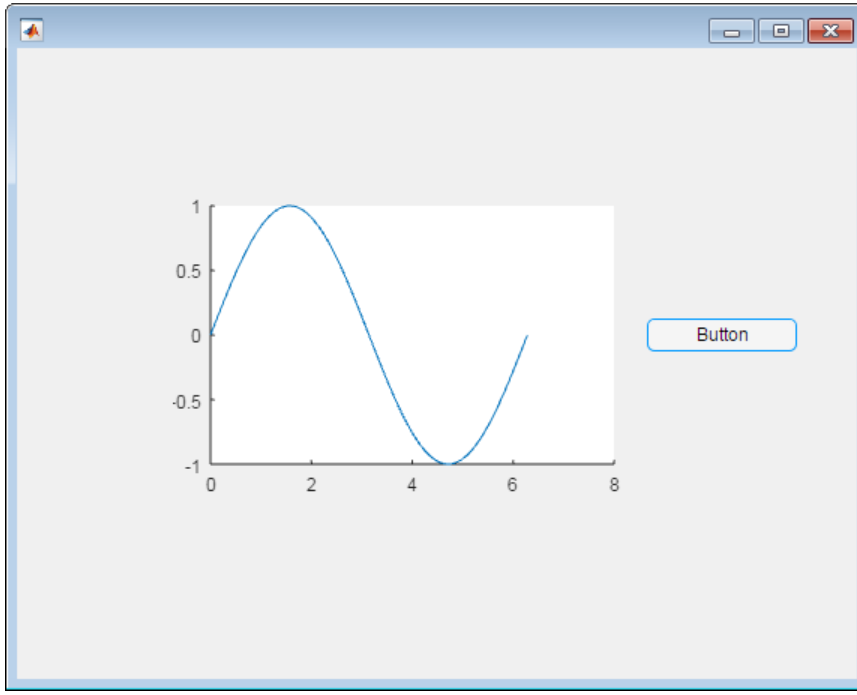

See Also

See Also

Functions

`appdesigner` | `uifigure`

Properties

Button Properties | StateButton Properties

Introduced in R2016a

uicheckbox

(App Designer) Create check box component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create a check box using `uicontrol`.

Syntax

```
cbx = uicheckbox
cbx = uicheckbox(parent)
cbx = uicheckbox( ___ ,Name,Value)
```

Description

`cbx = uicheckbox` creates a check box in a new UI figure window and returns the `CheckBox` object.

`cbx = uicheckbox(parent)` creates the check box in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`cbx = uicheckbox( ___ ,Name,Value)` specifies `CheckBox` properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see CheckBox Properties.

Example: `'Value',1` specifies that the check box is displayed with a check mark.

`'Value'` — State of check box

0 (default) | 1

State of the check box, specified as `0` (false) or `1` (true). When the `Value` property is set to `1`, the check box is checked. When the `Value` property is set to `0`, the check box is not checked.

`'ValueChangedFcn'` — Code to execute when app user selects or clears check box

[ ] (default) | function handle | cell array | character vector

Code to execute when the app user selects or clears the check box, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the check box. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the check box. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of check box after most recent app user interaction with it.
`PreviousValue`	Value of check box before most recent app user interaction with it.
`Source`	Component that executes the callback.
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the check box value changes programmatically.

`'Position'` — Location and size of check box

`[100 100 102 15]` (default) | `[left bottom width height]`

Location and size of the check box relative to the parent, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the check box
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the check box
`width`	Distance between the right and left outer edges of the check box
`height`	Distance between the top and bottom outer edges of the check box

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

All measurements are in pixel units.

Example: `[200 200 102 15]`

Examples

Create Check Box

Create a check box.

```
fig = uifigure;
cbx = uicheckbox(fig);
```

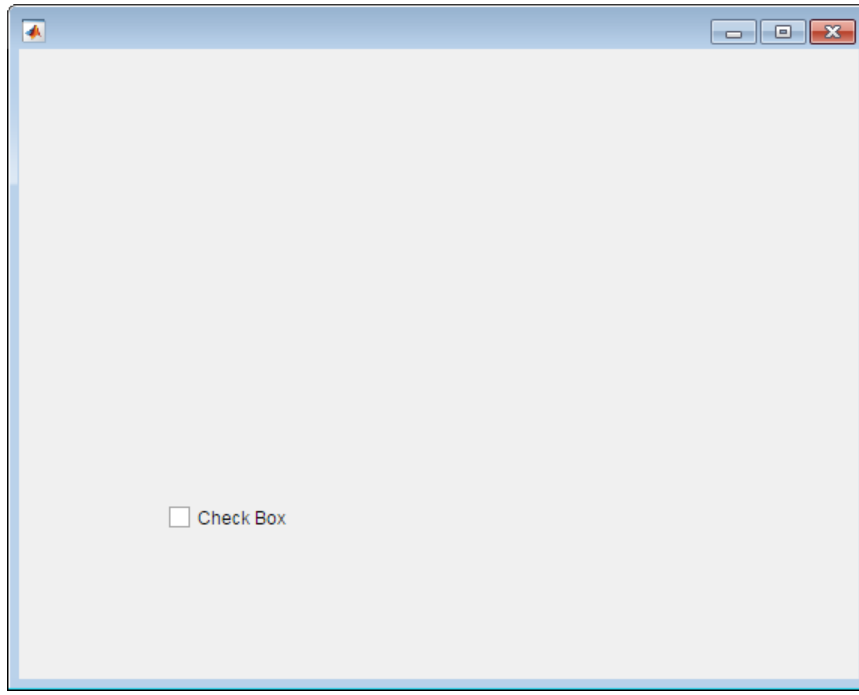

Create Check Box Within a Panel

Create a panel. Then create a check box within the panel.

```
fig = uifigure;
pnl = uipanel(fig);
cbx = uicheckbox(pnl);
```

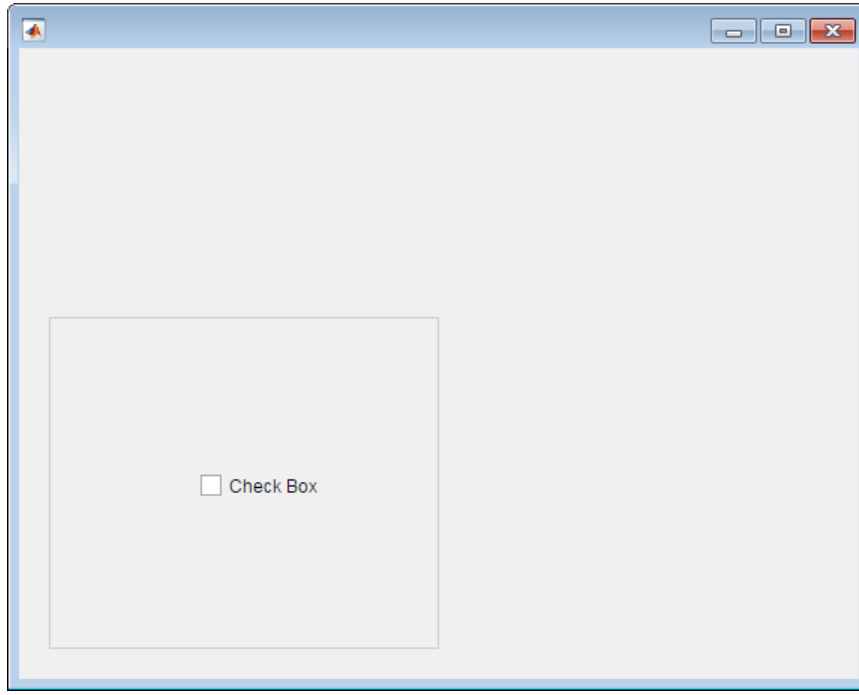

Set and Access Check Box Property Values

Create a check box and specify property values.

```
fig = uifigure;
cbx = uicheckbox(fig, 'Text','Show Value',...
                  'Value', 1,...
                  'Position',[150 50 102 15]);
```

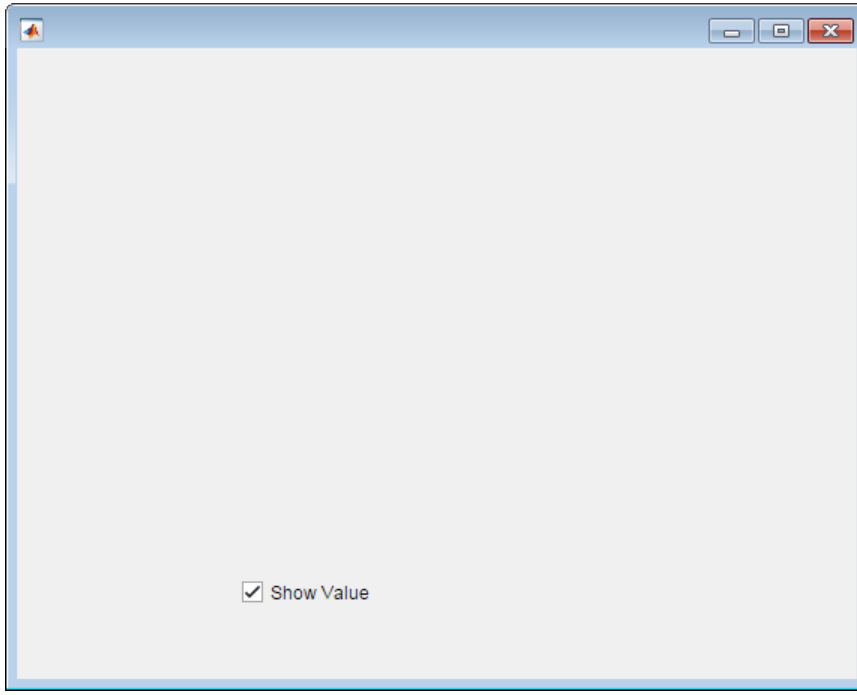

Clear the check box.

```
cbx.Value = 0;
```

Determine the font size of the check box text.

```
fsize = cbx.FontSize
```

```
fsize =

    12
```

Code Response to Check Box Selection

Create a radio button group and a check box. When an app user selects the check box, a radio button is disabled.

Save the following code to `disableRadioButton.m` on your MATLAB path.

This code creates a window containing a radio button group and a check box. When an app user clears the check box, the check box `ValueChangedFcn` disables the third radio button.

```
function disableRadioButton
% Create a UI figure window:
fig = uifigure('Position',[100 100 229 276]);

% Create a button group and radio buttons:
bg = uibuttongroup('Parent',fig,...
    'Position',[56 77 123 85]);
rb1 = uiradiobutton(bg,'Position',[10 60 91 15]);
rb2 = uiradiobutton(bg,'Position',[10 38 91 15]);
rb3 = uiradiobutton(bg,'Position',[10 16 91 15]);

% Create a check box:
cbx = uicheckbox(fig,'Position',[55 217 102 15],...
    'ValueChangedFcn',@(cbx,event) cBoxChanged(cbx,rb3));
end

% Create the function for the ValueChangedFcn callback:
function cBoxChanged(cbx,rb3)
val = cbx.Value;
if val
    rb3.Enable = 'off';
else
    rb3.Enable = 'on';
end
end
```

Run `disableRadioButton`, and then select the check box. The third radio button is disabled.

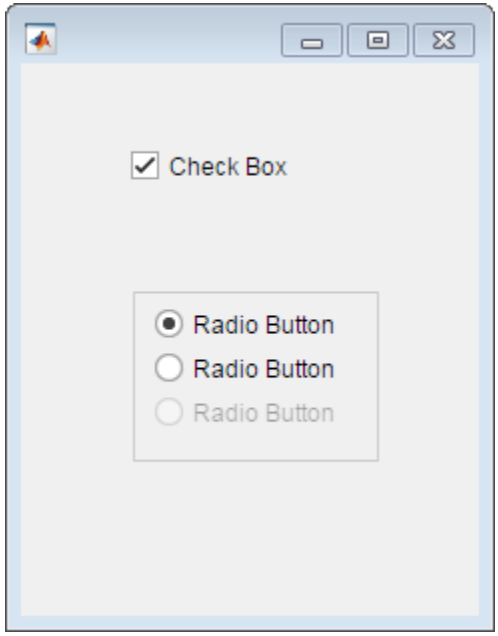

See Also

See Also

Functions
`appdesigner` | `uifigure`

Properties
CheckBox Properties

Introduced in R2016a

uidropdown

(App Designer) Create drop-down component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create a drop-down component using `uicontrol`.

Syntax

```
dd = uidropdown
dd = uidropdown(parent)
dd = uidropdown( ___ ,Name,Value)
```

Description

`dd = uidropdown` creates a drop-down component in a new UI figure window and returns the `DropDown` component object.

`dd = uidropdown(parent)` creates the drop-down in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`dd = uidropdown( ___ ,Name,Value)` specifies object properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes. Use the `Name,Value` pair, `Editable,'on'` to specify a drop-down component that allows the app user to type text into the drop-down component or select a predefined option.

Input Arguments

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see .DropDown Properties.

Example: `'Items',{'Red','Yellow','Blue'}` specifies the options presented in the drop-down component.

`'Value'` — Drop-down component value
`'Option 1'` (default) | element of `Items` cell array | element of `ItemsData` cell array | app-user-entered value

Drop-down component value, specified as an element of the `Items` or `ItemsData` cell array or the app-user-entered value. The default is the first element of the `Items` array.

- If `ItemsData` is empty, `Value` is the selected element of `Items`.
- If `ItemsData` is not empty, `Value` is the element in `ItemsData` that corresponds to the selected element of `Items`

The app user can type values in the drop-down component if the `Editable` property value is `'on'`.

Programmatic Changes When `ItemsData` Is Empty

Suppose all of the following are true:

- The `Items` property value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is empty.
- The app user has the second element, `Blue`, selected from the drop-down component.

If the `Items` value changes programmatically to `{'Pink','Blue','Aqua'}`, then the element selected before the programmatic change is an element of the updated `Items`

value. In this case, the `Value` remains `'Blue'` and the selection remains the second drop-down component element.

If the `Items` value changes programmatically to `{'Red','Teal','Green'}`, then the drop-down component element selected before the programmatic change is not an element of the updated `Items` value. In this case, the `Value` becomes the first element of the `Items` value (`'Red'`) and the selection becomes the first drop-down component element.

Programmatic Changes When `ItemsData` Is Not Empty

Suppose all of the following are true:

- The `Items` value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is originally `[10 20 30]`.
- The app user has the second element, `Blue`, selected from the drop-down component before the programmatic change.

If the `ItemsData` property changes programmatically to `[0 10 20]`, then the app user selection corresponds to an element of `ItemsData` that is the same before and after the programmatic change (20). However, 20 now corresponds to the third `Items` element. So the third drop-down component element (Blue) is selected, even though the `Value` remains unchanged.

If the `ItemsData` property changes programmatically to `[10 100 1000]`, then the app user selection corresponds to an element of `ItemsData` that no longer exists. In this case, the `Value` becomes the first element of `ItemsData` (10) and the first drop-down component item (Red) is selected.

Programmatic Changes Resulting in Duplicate `ItemsData` Values

Suppose all of the following are true:

- The `Items` value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is originally `[10 20 20]`.

- The app user has the first element, `'Red'`, selected from the drop-down component before the programmatic change.

If the `Value` property changes programmatically to `20`, then the drop-down component selection becomes the first element of `Items` that matches that value, namely, `'Blue'`.

`'Items'` — Drop-down component options presented to app user
`{'Option 1','Option 2','Option 3','Option 4'}` (default) | 1-by-n cell array of character vectors

Drop-down component options presented to the app user, specified as a 1-by-n cell array of character vectors. Duplicate elements are allowed. The drop-down component displays as many options as there are elements in the `Items` property value.

Example: `{'Red','Yellow','Blue'}`

Example: `{'1','2','3'}`

`'ItemsData'` — Data associated with each element of the `Items` property value
empty array (`[ ]`) (default) | 1-by-n numeric array | 1-by-n cell array

Data associated with each element of the `Items` property value, specified as a 1-by-n numeric array or a 1-by-n cell array. Duplicate elements are allowed.

For example, if you set the `Items` value to employee names, you might set the `ItemsData` value to corresponding employee ID numbers. The `ItemsData` value is not visible to the app user.

If the number of array elements in the `ItemsData` value and the `Items` value do not match, one of the following occurs:

- When the `ItemsData` value is empty, then all the elements of the `Items` value are presented to the app user.
- When the `ItemsData` value has more elements than the `Items` value, then all the elements of the `Items` value are presented to the app user. MATLAB ignores the extra `ItemsData` elements.
- When the `ItemsData` value is not empty, but has fewer elements than the `Items` value, the only elements of the `Items` value presented to the app user are those that have a corresponding element in the `ItemsData` value.

Example: `{'One','Two','Three'}`

Example: `[10 20 30 40]`

`'Editable'` — Editable state of drop-down component

`'off'` (default) | `'on'`

Editable state of the drop-down component, specified as `'off'` or `'on'`.

If the `Enable` property value is `'off'`, then the app user cannot change the drop-down component text, even if the Editable property value is `'on'`.

`'ValueChangedFcn'` — Code to execute when selection changes

`''` (default) | function handle | cell array | character vector

Code to execute when the drop-down selection changes, specified as a function handle, a cell array containing a function handle and additional arguments, or a character vector.

This callback function can access specific information about the user's interaction with the drop-down. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the drop-down. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Drop-down component value after app user's most recent interaction with it.
`PreviousValue`	Drop-down component value before app user's most recent interaction with it.
`Edited`	Logical value (0 or 1) that indicates whether the callback was executed as a result of typing a value into the drop-down component. The `Edited` value is 1 when the app user typed in the drop-down component and 0 when the app user selected an option from the drop-down component.
`Source`	Component that executes the callback.

Property	Value
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the app user clicks the currently selected option, or if the `Value` property setting changes programmatically.

`'Position'` — Location and size of drop-down component
`[100 100 100 22]` (default) | `[left bottom width height]`

Location and size of the drop-down component relative to the parent, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the drop-down component
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the drop-down component
`width`	Distance between the right and left outer edges of the drop-down component
`height`	Distance between the top and bottom outer edges of the drop-down component

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 22]`

Examples

Create Drop-Down Component

Create a drop-down component.

```
fig = uifigure;
dd = uidropdown(fig);
```

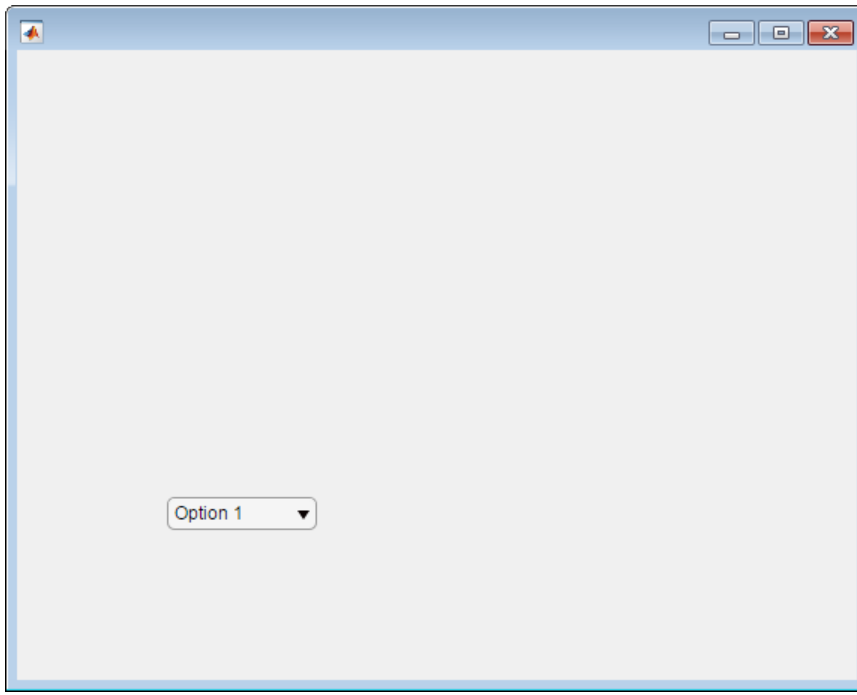

Clicking anywhere in the drop-down component causes it to open.

Create a Drop Down Component in UI Figure Window

Specify the parent window for a drop-down component.

```
fig = uifigure('Position', [100 100 300 250]);
dd = uidropdown(fig);
```

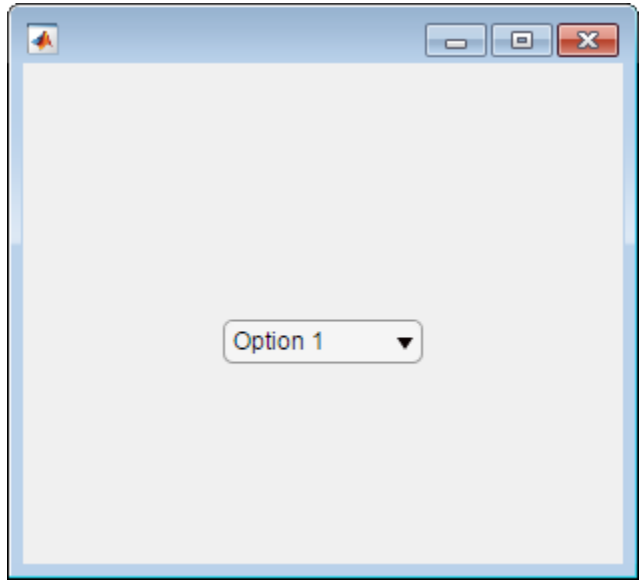

Set and Access Drop Down Properties

Create a drop-down component and specify the options to present to the app user.

```
fig = uifigure;
dd = uidropdown(fig, 'Items',{'Red','Yellow','Blue','Green'},...
                     'Value', 'Blue');
```

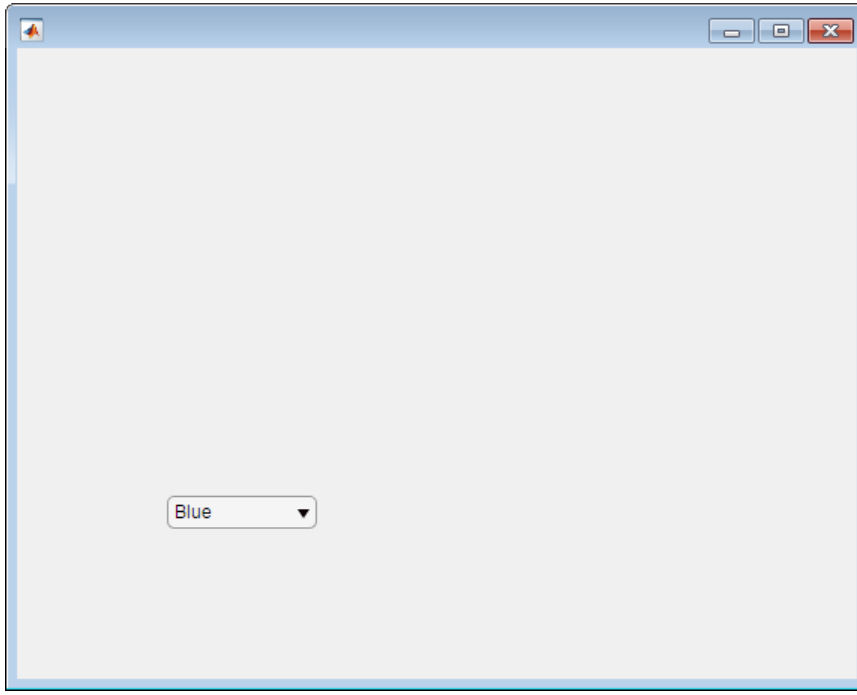

Determine the value associated with the selected option.

```
value = dd.Value
```

```
value =

Blue
```

By default, the `ItemsData` property is empty, so the drop-down component value corresponds to the element selected in the drop-down component.

Associate data values with each drop-down component item.

```
dd.ItemsData = [1 2 3 4];
```

Determine the value associated with the selected option.

```
value = dd.Value
```

```
value =
```

```
3
```

Notice that when the `ItemsData` property value is not empty, the value of the drop-down component is the `ItemsData` value that corresponds to the selected `Items` value element.

Create an Editable Drop Down

```
fig = uifigure;
dd = uidropdown(fig, 'Editable','on');
```

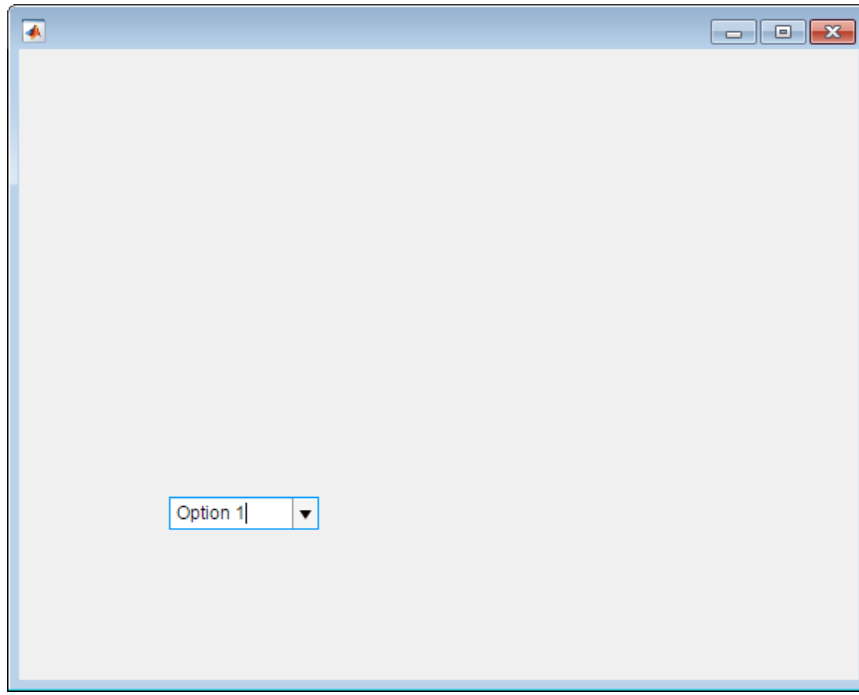

Clicking anywhere in the drop-down component, other than the down-arrow, inserts a caret, enabling the user to type text in the drop-down component.

Code Response to Drop Down Selection

Create a plot and a drop-down component. When the app user makes a selection from the drop-down component, the plot changes color.

Save the following code to `plotOptions.m` on your MATLAB path. This code creates a window containing a plot and a drop-down component. When an app user changes the drop-down component selection, the `ValueChangedFcn` callback changes the plot color.

```
function plotoptions
% Create UI figure and components:

fig = uifigure;

ax = uiaxes('Parent',fig,...
    'Position',[10 10 400 400]);

% Create a plot
x = linspace(-2*pi,2*pi);
y = sin(x);
p = plot(ax,x,y);
p.Color = 'Blue';

% Create drop-down component
dd = uidropdown(fig,...
    'Position',[430 210 100 22],...
    'Items',{'Red','Yellow','Blue','Green'},...
    'Value','Blue',...
    'ValueChangedFcn',@(dd,event) selection(dd,p));
end

% Create ValueChangedFcn callback:
    function selection(dd,p)
        val = dd.Value;
        p.Color = val;
    end
```

Run `plotOptions`. Select **green** from the drop-down component to change the plot color to green.

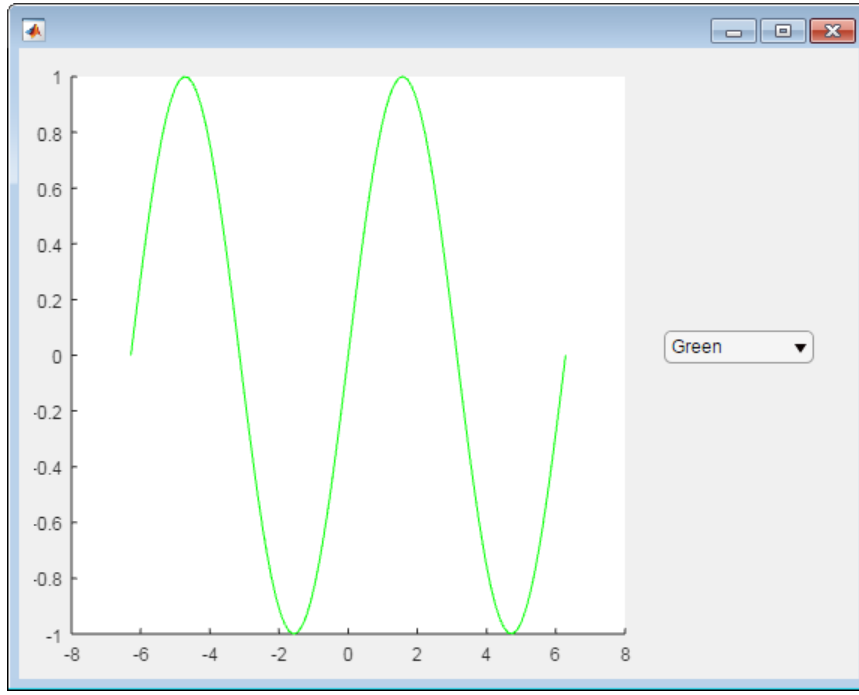

Code Response to Drop-Down Component Entry or Selection

Create a drop-down component and a lamp. When the app user makes a selection from the drop-down component, the lamp size changes.

Save the following code to a `lampSize.m` on your MATLAB path. This code creates a UI figure window containing a drop-down component and a lamp. When an app user changes the drop-down component selection, the `ValueChangedFcn` callback changes the size of the lamp.

```
function lampSize
% Create figure and components

fig = uifigure('Position',[100 100 300 275]);

lmp = uilamp(fig,...
    'Position',[100 30 20 20]);

dd = uidropdown(fig,...
```

```
    'Editable','on',...
    'Position',[84 204 100 20],...
    'Items',{'Size x 1','Size x 2','Size x 3','Size x 4'},...
    'ItemsData',[1 2 3 4],...
    'Value',1,...
    'ValueChangedFcn',@(dd,event) optionSelected(dd,lmp));
end

% Create ValueChangedFcn callback
function optionSelected(dd,lmp)
val = dd.Value;
s = [20 20];
switch val
    case {1, 2, 3, 4}  % User selected a defined option
        size = val * s;
        lmp.Position(3:4) = size;
    otherwise % User typed a value
        m = str2num(val);
        size = m * s;
        lmp.Position(3:4) = size;
end
end
```

Run `lampSize` and select various options from the drop-down component.

Type a value in the drop-down component and press **Enter**. The lamp size changes. (If you type a large value, you might have to resize the figure to see the lamp.)

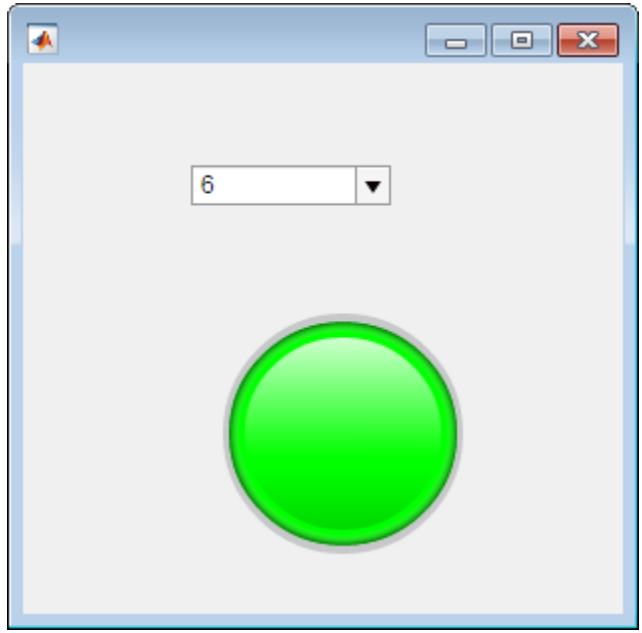

See Also

See Also

Functions
`appdesigner` | `uifigure`

Properties
DropDown Properties

Introduced in R2016a

uieditfield

(App Designer) Create text or numeric edit field component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create an edit field using `uicontrol`.

Syntax

```
edt = uieditfield
edt = uieditfield(style)
edt = uieditfield(parent)
edt = uieditfield(parent,style)
edt = uieditfield( ___ ,Name,Value)
```

Description

`edt = uieditfield` creates a text edit field in a new UI figure window and returns the `EditField` object.

`edt = uieditfield(style)` creates an edit field of the specified style.

`edt = uieditfield(parent)` creates the edit field in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`edt = uieditfield(parent,style)` creates an edit field of the specified style in the specified parent container.

"Create Numeric Edit Field" on page 1-13332

`edt = uieditfield( ___ ,Name,Value)` specifies object properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`style` — Type of edit field

`'text'` (default) | `'numeric'`

Type of edit field, specified as one of the following:

- `'text'`

  By default, text edit fields are empty.
- `'numeric'`

  By default, numeric edit fields display the value 0. If the app user types a nonnumeric value in a numeric edit field, MATLAB opens an error tooltip and reverts the value to the last valid value.

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

`EditField` and `NumericEditField` objects supports different sets of properties. For a full list of properties and descriptions for object, see the associated property page.

- EditField Properties — If `style` is the default, `'text'`
- NumericEditField Properties — If `style` is `'numeric'`

Examples

Create Text Edit Field

Create a text edit field in a window.

```
fig = uifigure;
edt = uieditfield(fig);
```

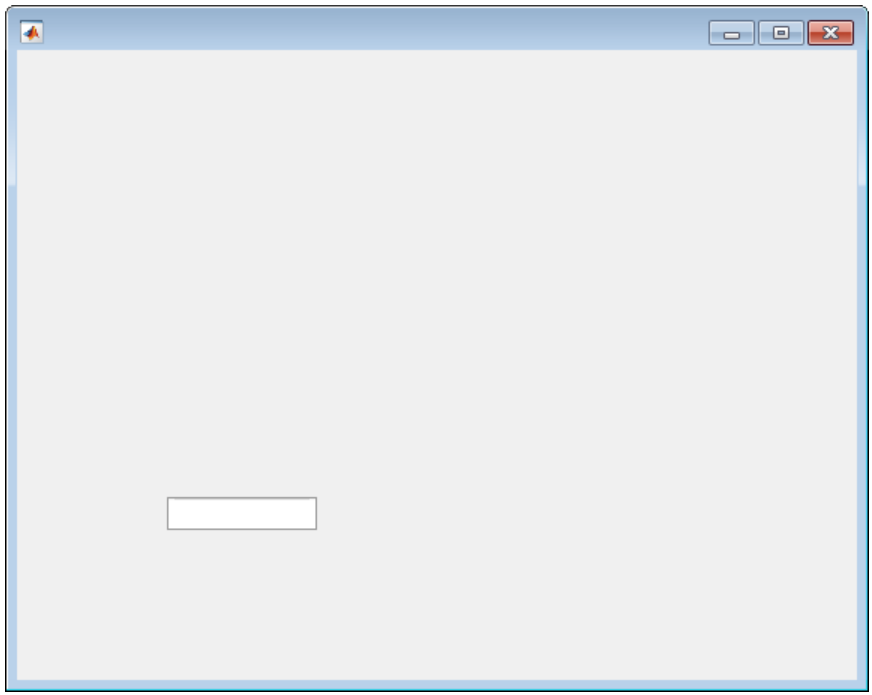

Create Numeric Edit Field

Create a numeric edit field by specifying the style as numeric.

```
fig = uifigure;
edt = uieditfield(fig,'numeric');
```

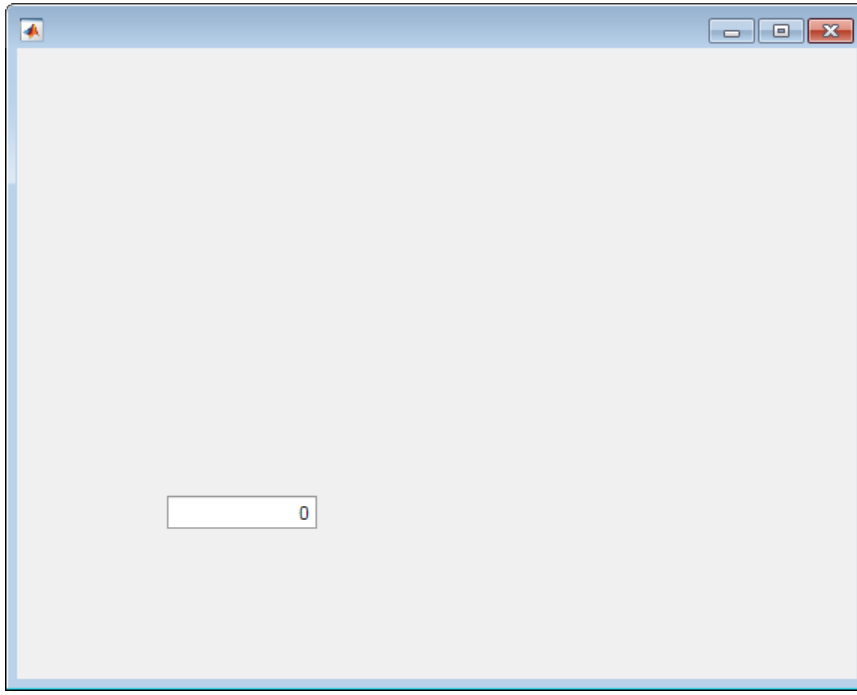

Create a Numeric Edit Field Within a Panel

Specify a `Panel` as the parent object.

```
fig = uifigure;
pnl = uipanel(fig);
edt = uieditfield(pnl,'numeric');
```

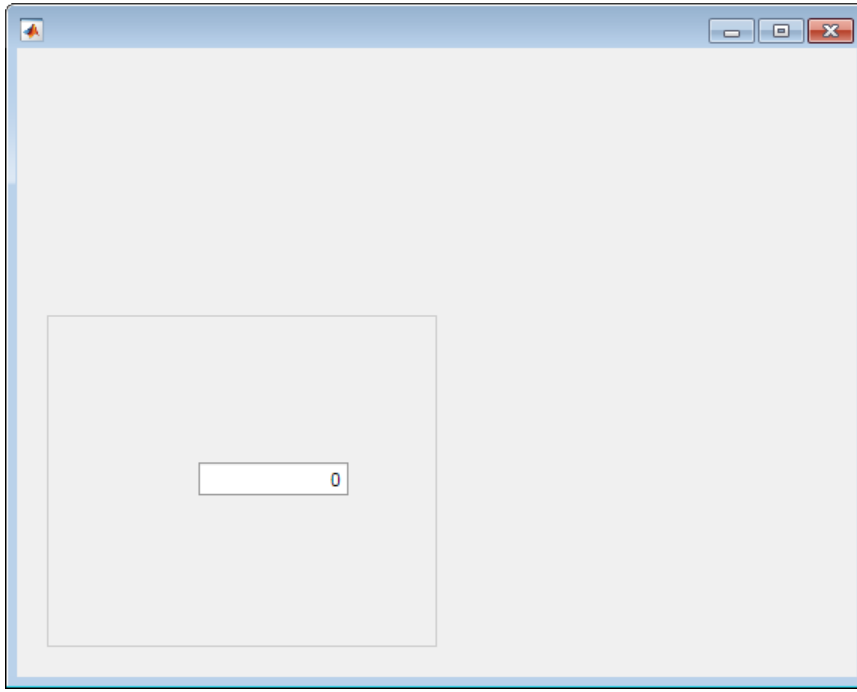

Set and Access Numeric Edit Field Property Values

Create a numeric edit field with rounding on.

```
fig = uifigure;
edt = uieditfield(fig,'numeric',...
                    'RoundFractionalValues','on');
```

Determine the default limits.

```
limits = edt.Limits
```

```
limits =

  -Inf   Inf
```

The returned values indicate that there are no limits.

Change the limits to 0 through 100. (By default limits are inclusive.)

```
edt.Limits = [0 100];
```

Create Numeric Edit Field Specifying Limit Inclusiveness

Create a numeric edit field that allows the app user to enter a value greater than -5 and less than or equal to 10.

```
fig = uifigure;
edt = uieditfield(fig,'numeric',...
                      'Limits', [-5 10],...
                      'LowerLimitInclusive','off',...
                      'UpperLimitInclusive','on',...
                      'Value', 5);
```

If you enter a value in the numeric edit field that is outside the limits, MATLAB displays a message. The message indicates the problem and restores the value to the previous valid value.

Create Numeric Edit Field and Specify Display Format

Create a numeric edit field that allows the app user to enter any value, but always displays the value using exactly two decimal places. MATLAB stores the exact value that the app user enters.

```
fig = uifigure;
edt = uieditfield(fig,'numeric',...
                      'ValueDisplayFormat', '%.2f');
```

Type `5.5556` in the numeric edit field, and then click outside it. The edit field displays `5.56`.

MATLAB stores the value as `5.556`. If you click in the edit field, it displays `5.556`.

Code Response to Changed Edit Field Text

Code the `ValueChangedFcn` callback so that when the app user changes text in the edit field, a label is updated to match that text.

Save the following code to `textValue.m` on your MATLAB path.

```
function textValue
% Create UI figure and components.

fig = uifigure('Position',[100 100 350 275]);
```

```
lbl = uilabel(fig,...
      'Position',[130 100 100 15]);

txt = uieditfield(fig,...
      'Position',[100 175 100 22],...
      'ValueChangedFcn',@(txt,event) textChanged(txt,lbl));
end

% Code the callback function.
function textChanged(txt,lbl)
lbl.Text = txt.Value;
end
```

Run `textValue`, and type `Velocity` in the edit field. Click outside the edit field to trigger the callback.

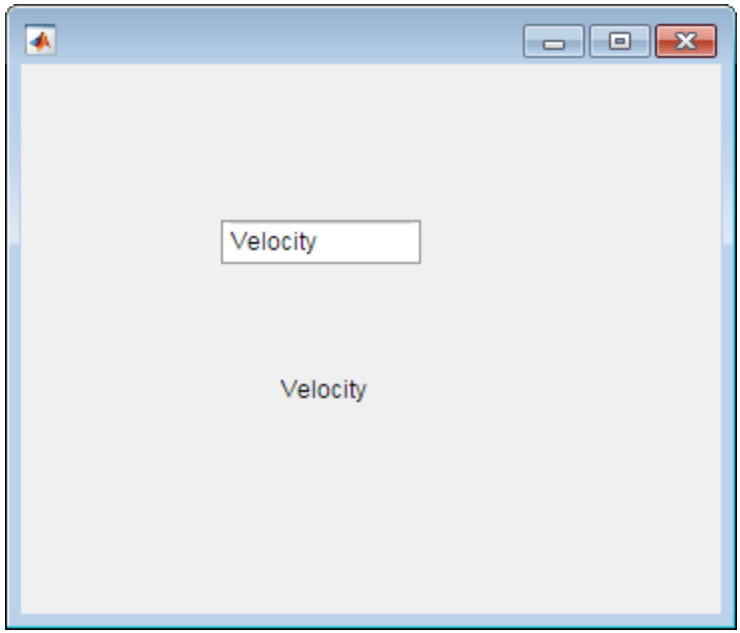

Code Response to Changed Numeric Edit Field Value

Code the `ValueChangedFcn` callback such that when the app user changes the value in the edit field, a slider is updated to match that value.

Save the following code to `numericEditFieldValue.m` on your MATLAB path.

```
function numericEditFieldValue
% Create UI figure and components

fig = uifigure('Position',[100 100 350 275]);

slider = uislider(fig,...
    'Position',[100 140 120 3]);

numfld = uieditfield(fig,'numeric',...
    'Position',[110 200 100 22],...
    'ValueChangedFcn',@(numfld,event) numberChanged(numfld,slider));

end

% Create ValueChangedFcn callback
function numberChanged(numfld,slider)
slider.Value = numfld.Value;
end
```

Run `numericEditFieldValue`.

Enter a value from 0 to 100 in the numeric edit field and click outside the field. The slider moves to indicate the numeric edit field value.

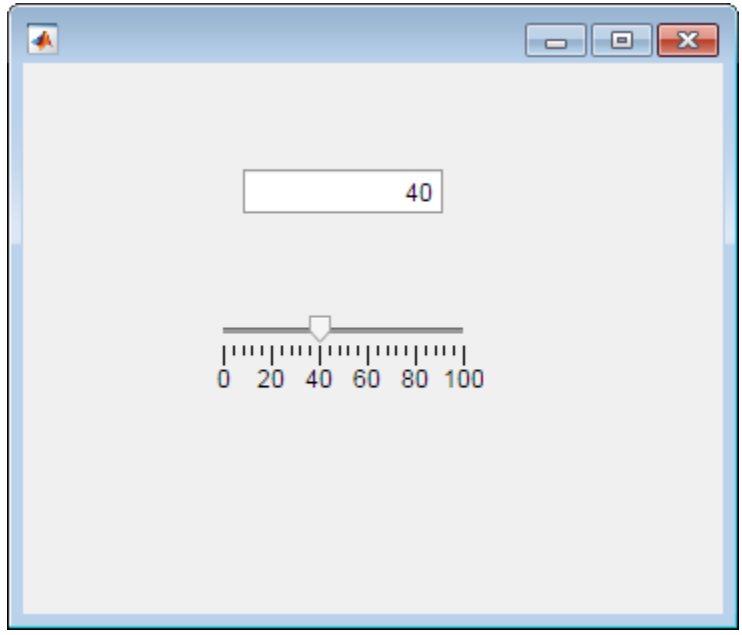

Use Event Data to Maintain a Log

Code the `ValueChangedFcn` callback to maintain a log of values entered in a single session. When the app user changes the value in the edit field, the previous field value is added to a list maintained in a text area. The callback uses the `PreviousValue` property returned in the `event` argument to populate the text area.

Save the following code to `logNames.m` on your MATLAB path.

```
function logNames
% Create UI figure and components

fig = uifigure('Position',[100 100 410 400]);

loglist = uitextarea(fig,...
    'Position',[134 49 150 277],...
    'Editable','off');

namefld = uieditfield(fig,'text',...
  'Value', 'Bob Langley',...
  'Position',[134 367 100 22],...
```

```
  'ValueChangedFcn',@(namefld,event) nValChanged(namefld,event,loglist));
end

% Create ValueChangedFcn callback
function nValChanged(namefld,event,loglist)
newvalue = event.Value;
previousValue = event.PreviousValue;

loglist.Value = [previousValue; loglist.Value];

end
```

Run `logNames`.

Each time you enter a name in the text edit field and press enter, the name that was previously in the text edit field is added to the text area.

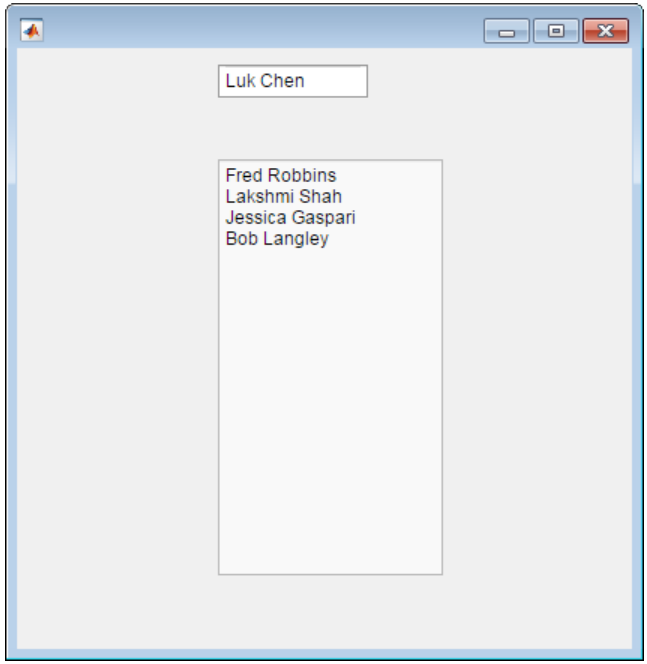

See Also

See Also

Functions

`appdesigner` | `uifigure`

Properties

EditField Properties | NumericEditField Properties

Introduced in R2016a

uifigure

(App Designer) Create UI figure window

Compatibility

Use only for creating App Designer apps. GUIDE creates apps in traditional figures. For details, see "Graphics Support in App Designer".

Syntax

```
fig = uifigure
fig = uifigure(Name,Value)
```

Description

`fig = uifigure` creates a UI figure window using default property values configured for building apps in App Designer and returns the `Figure` object.

`fig = uifigure(Name,Value)` specifies object properties using one or more `Name,Value` pair arguments.

Examples

Create Default UI Figure

```
fig = uifigure;
```

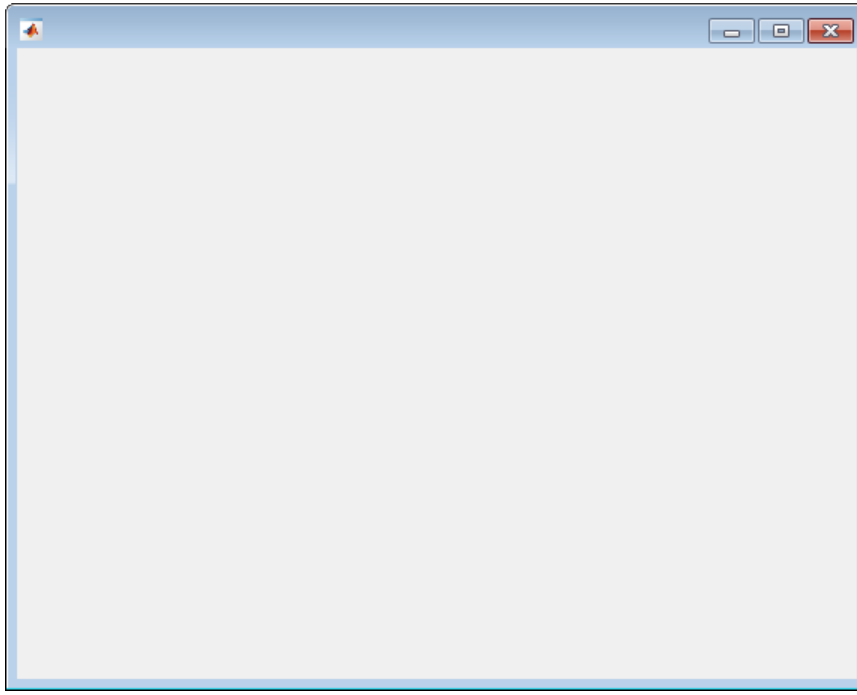

Set and Access Properties

Create a UI figure with a specific title.

```
fig = uifigure('Name','Plotted Results');
```

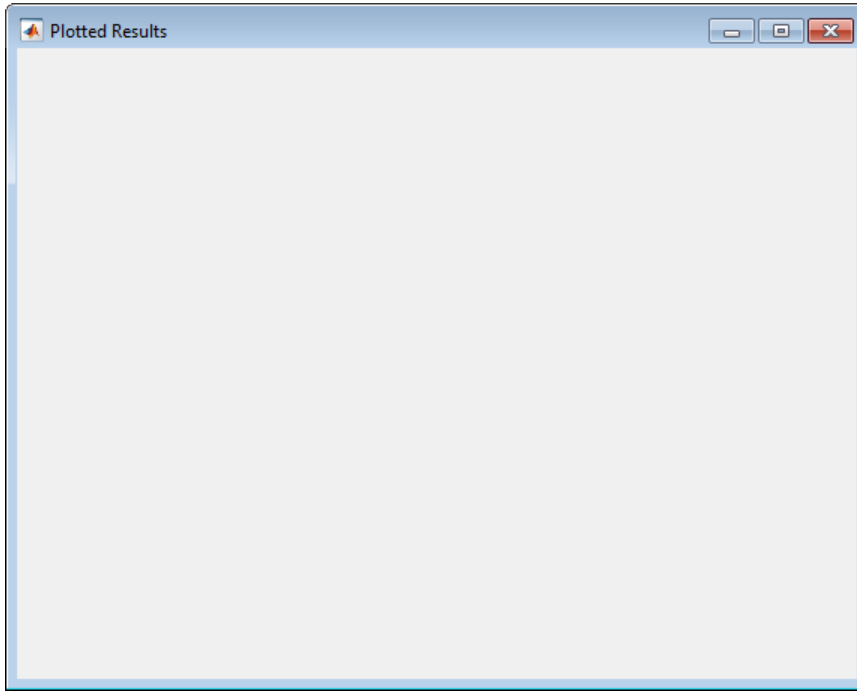

Get the `Position` property value.

```
p = fig.Position
```

```
ans =

   680   678   560   420
```

Code CloseRequestFcn to Confirm Closing UI Figure

Code the `CloseRequestFcn` callback to open a modal Confirmation dialog box when the user tries to close the window.

Copy and paste this code into the MATLAB Editor, and then run `closeFig`.

```
function closeFig
fig = uifigure('Position',[100 100 350 275],...
    'CloseRequestFcn',@(fig, event) my_closereq(fig));
end
function my_closereq(fig)
```

```
selection = questdlg('Close the figure window?',...
    'Confirmation',...
    'Yes','No','Yes');
switch selection,
    case 'Yes',
        delete(fig)
    case 'No'
        return
end
end
```

Click the figure close button. The Confirmation dialog box opens.

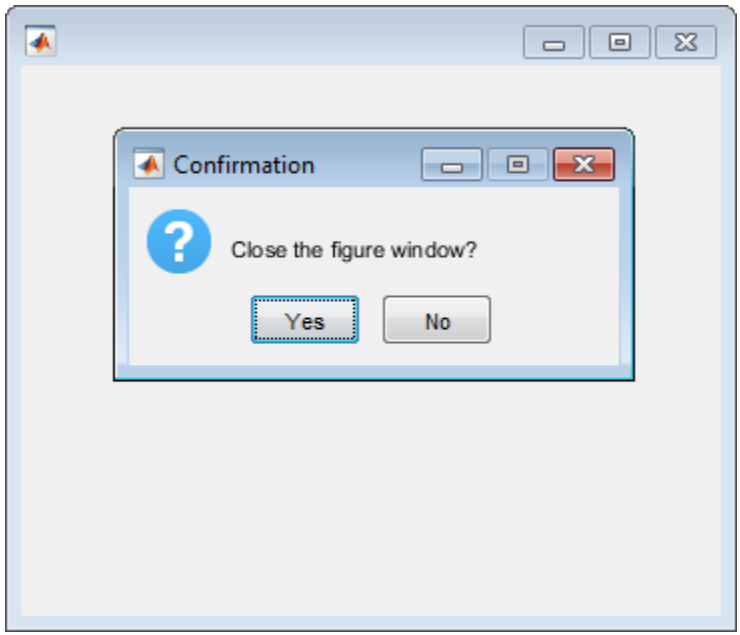

Input Arguments

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single

quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see UI Figure Properties.

Example: `'Name','My App'` specifies `My App` as the title of the UI figure.

`'Name'` — Title

`''` (default) | character vector

Title, specified as a character vector.

Example: `'Trial'`

`'Position'` — Location and size of UI figure, excluding borders and title bar

`[left bottom width height]`

Location and size of the UI figure, excluding borders and title bar, specified as a four-element vector of the form `[left bottom width height]`.

This table describes each element in the vector.

Element	Description
`left`	Distance from the left edge of the primary display to the inner left edge of the UI figure window. This value can be negative on systems that have more than one monitor.
`bottom`	Distance from the bottom edge of the primary display to the inner bottom edge of the UI figure window. This value can be negative on systems that have more than one monitor.
`width`	Distance between the right and left inner edges of the UI figure.
`height`	Distance between the top and bottom inner edges of the UI figure.

Limitations

- Currently, you cannot pass a `Figure` object created with the `uifigure` function to the `print`, `rotate3d`, `pan`, or `zoom` functions. If you attempt to do so, MATLAB throws an error .

See Also

See Also

Functions
`appdesigner` | `uibuttongroup` | `uipanel` | `uitab`

Properties
UI Figure Properties

Introduced in R2016a

UI Figure Properties

(App Designer) Control UI figure appearance and behavior

Compatibility

Valid for figures used in App Designer or figures created with the `uifigure` function. For figures used in GUIDE or apps created with the `figure` function, see Figure Properties.

Description

UI figures are containers for creating UIs in App Designer. Properties control the appearance and behavior of the UI figure. Use dot notation to refer to a particular object and property:

```
fig = uifigure;
name = fig.Name;
fig.Name = 'My Results';
```

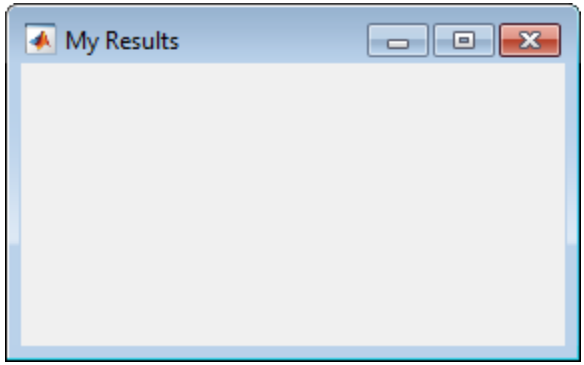

Appearance

`Name` — Title
`''` (default) | character vector

Title, specified as a character vector.

Example: `'Trial'`

`Color` — Background color

RGB triplet | short name | long name | `'none'`

Background color, specified as an RGB triplet, a predefined color name, or `'none'`. If you specify `'none'`, the background color appears black on screen.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

`Visible` — Visibility of UI figure

`'on'` (default) | `'off'`

Visibility UI figure, specified as `'on'` or `'off'`. The `Visible` property determines whether the UI figure is displayed on the screen. If the `Visible` property is set to `'off'`, the entire UI figure is hidden. However, you can still specify and access properties.

To make your app start faster, set the `Visible` property of all components that are not displayed at startup to `'off'`.

Note Changing the `Visible` property does *not* change the value of the `Visible` property in a child component. This is true even though hiding the UI figure causes the children to be hidden.

Color and Transparency Mapping

`Alphamap` — Transparency map for axes content

vector of 64 values between `0` and `1` (default) | vector of values between `0` and `1`

Transparency map for axes content, specified as a vector of values between `0` and `1`, inclusive. The size of the vector can be m-by-1 or 1-by-m. MATLAB accesses alpha values by their index in the vector. Alphamaps can be any length.

`Colormap` — Color map for `UIAxes` content

parula (default) | `m`-by-`3` array of RGB triplets

Color map for `UIAxes` content, specified as an `m`-by-`3` array of RGB (red, green, blue) triplets that define `m` individual colors.

Example: `uifigure('Colormap',[1 0 1; 0 0 1; 1 1 0])` sets the color map to three colors: magenta, blue, and yellow.

MATLAB accesses these colors by their row number.

Location and Size

`Position` — Location and size of UI figure, excluding borders and title bar

`[left bottom width height]`

Location and size of the UI figure, excluding borders and title bar, specified as a four-element vector of the form `[left bottom width height]`.

This table describes each element in the vector.

Element	Description
`left`	Distance from the left edge of the primary display to the inner left edge of the UI figure window. This value can be negative on systems that have more than one monitor.
`bottom`	Distance from the bottom edge of the primary display to the inner bottom edge of the UI figure window. This value can be negative on systems that have more than one monitor.
`width`	Distance between the right and left inner edges of the UI figure.

Element	Description
`height`	Distance between the top and bottom inner edges of the UI figure.

`InnerPosition` — Location and size of UI figure, excluding borders and title bar

`[left bottom width height]`

Location and size of UI figure, excluding borders and title bar, specified as a four-element vector of the form `[left bottom width height]`. All measurements are in units specified by the `Units` property.

This property value is identical to the `Position` property value.

`Units` — Units of measurement

`'pixels'` (default)

Units of measurement, specified as `'pixels'`.

`Resize` — Resize mode

`'on'` (default) | `'off'`

Resize mode, specified as:

- `'on'` — App user can resize the UI figure.
- `'off'` — App user cannot resize the UI figure. The UI figure does not display any resizing controls.

`AutoResizeChildren` — Allow child components to resize automatically

`'on'` (default) | `'off'`

Allow child components to resize automatically, specified as `'on'` or `'off'`.

- `'on'` — Child components automatically resize when this container resizes.
- `'off'` — Child components do not resize.

The `AutoResizeChildren` property only affects direct children of a container, not children inside nested containers.

If you prefer to use your own resizing algorithm, set this property to `'off'` and create a `SizeChangedFcn` callback for the container. Be aware that the `SizeChangedFcn` callback will not execute when `AutoResizeChildren` is set to `'on'`.

Alternatively, if you want a fixed layout that does not resize, set the Resize property of the `Figure` object to `'off'`.

`SizeChangedFcn` — Size change callback function

`''` (default) | function handle | cell array | character vector

Size change callback function, specified as one of these values:

- Function handle
- Cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- Character vector that is a valid MATLAB expression. MATLAB evaluates this expression in the base workspace.

Define this callback to customize the app layout when the size of this container changes (e.g., when the user resizes the window).

Note: The `SizeChangedFcn` callback will not execute unless the `AutoResizeChildren` property of this container is set to `'off'`. In App Designer, you can make the `SizeChangedFcn` executable by clearing the **Resize components when app is resized** check box in the **UI Figure Properties** panel.

The `SizeChangedFcn` callback executes when:

- This container becomes visible for the first time.
- This container is visible while its size changes.
- This container becomes visible for the first time after its size changes. This situation occurs when the size changes while the container is invisible, and then it becomes visible later.

Other important points to consider when defining a `SizeChangedFcn` callback:

- Consider delaying the display of this container until after all the variables that the `SizeChangedFcn` uses are defined. This practice can prevent the `SizeChangedFcn` callback from returning an error. To delay the display of the container, set its `Visible` property to `'off'`. Then, set the `Visible` property to `'on'` after you define the variables that your `SizeChangedFcn` callback uses.
- If your app contains nested containers, they resize from the inside out.

- To access the container that is resizing from within the `SizeChangedFcn`, refer to the source object (the first input argument in the callback) or use the `gcbo` function.

Callback Execution Control

`Interruptible` — Callback interruption

`'on'` (default) | `'off'`

Callback interruption, specified as `'on'` or `'off'`. The `Interruptible` property determines if a running callback can be interrupted.

There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

Whenever MATLAB invokes a callback, that callback attempts to interrupt the running callback. The `Interruptible` property of the object owning the running callback determines if interruption is allowed. If interruption is not allowed, then the `BusyAction` property of the object owning the interrupting callback determines if it is discarded or put into a queue.

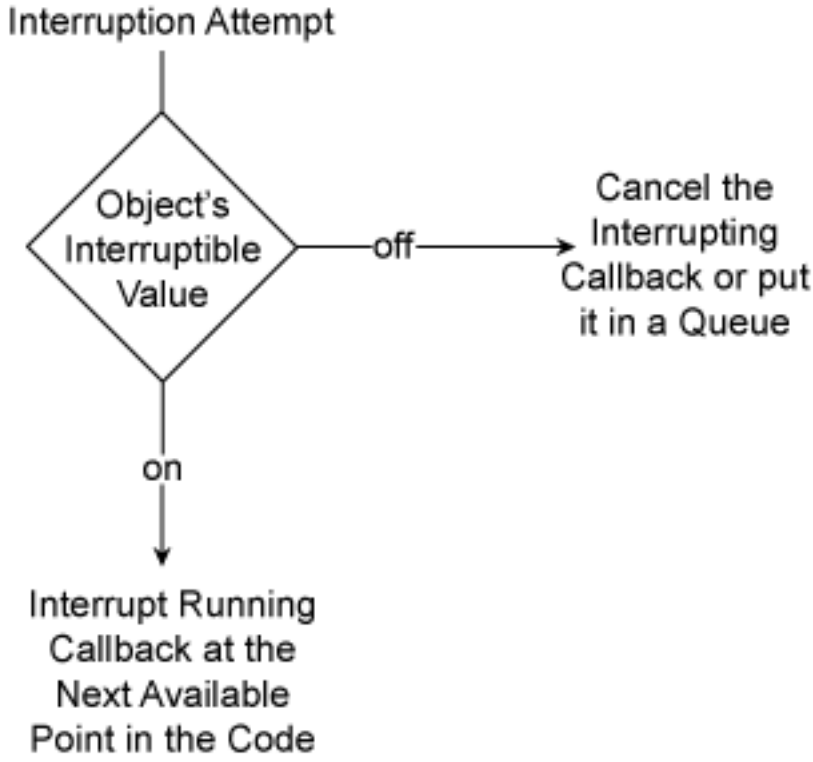

If a callback is the running callback, then the `Interruptible` property determines if it can be interrupted by another callback. The `Interruptible` property has two possible values:

- `'on'` — A callback can interrupt the running callback. The interruption occurs at the next point where MATLAB processes the queue, such as when there is a `drawnow`, `uifigure`, `getframe`, `waitfor`, or `pause` command.
  - If the running callback contains one of the commands, then MATLAB stops the execution of the callback at this point and executes the interrupting callback. MATLAB resumes executing the running callback when the interrupting callback completes.

  - If the running callback does not contain one of these commands, then MATLAB finishes executing the callback without interruption.
- `'off'` — A callback cannot interrupt the running callback. MATLAB finishes executing the running callback without any interruptions.

Note: Callback interruption and execution behave differently in these situations:

- If the interrupting callback is a `DeleteFcn`, `CloseRequestFcn` or `SizeChangedFcn` callback, then the interruption occurs regardless of the `Interruptible` property value.
- If the running callback is currently executing the `waitfor` function, then the interruption occurs regardless of the `Interruptible` property value.
- `Timer` objects execute according to schedule regardless of the `Interruptible` property value.

When an interruption occurs, MATLAB does not save the state of properties or the display . For example, the object returned by the `gca` or `gcf` command might change when another callback executes.

`BusyAction` — Callback queuing

`'queue'` (default) | `'cancel'`

Callback queuing, specified as `'queue'` or `'cancel'`. The `BusyAction` property determines how MATLAB handles the execution of interrupting callbacks. There are two callback states to consider:

- The *running* callback is the currently executing callback.
- The *interrupting* callback is a callback that tries to interrupt the running callback.

The `BusyAction` property of the object that owns the interrupting callback determines how MATLAB handles the execution of the interrupting callback. The `BusyAction` property has two possible values:

- `'queue'` — Put the interrupting callback in a queue to be processed after the running callback finishes execution.
- `'cancel'` — Do not execute the interrupting callback.

Whenever MATLAB invokes a callback, that callback always attempts to interrupt an executing callback (if one exists). The `Interruptible` property of the object whose

callback is executing determines if interruption is allowed. The `Interruptible` property has two possible values:

- `'on'` — Interruption occurs at the next point where MATLAB processes the queue. This is the default.
- `'off'` — `BusyAction` property (of the object owning the interrupting callback) determines if MATLAB enqueues or ignores the interrupting callback.

Window Control

`CloseRequestFcn` — Close request callback function

`'closereq'` (default) | function handle | cell array | character vector

Close request callback function, specified as a function handle, cell array containing a function handle and additional arguments, or a character vector. MATLAB executes this callback when the app user attempts to close the app. For example, you can code the callback to display a dialog box that asks the app user to confirm or cancel the close operation.

Consider calling the `delete` function to close the `Figure` in the `CloseRequestFcn` callback:

- In App Designer, call `delete(app)`.
- For apps created programmatically, call `delete(f)`, where `f` is the `Figure` object.

If the `closeRequestFcn` callback does not contain a `delete` command, MATLAB never closes the window. You can always call the `delete` function to force the window to close.

Creation and Deletion Control

`BeingDeleted` — Deletion status of this component

`'off'` (default) | `'on'`

This property is read-only.

Deletion status of this component, returned as `'off'` or `'on'`. MATLAB sets the `BeingDeleted` property to `'on'` when the `DeleteFcn` callback begins execution. The `BeingDeleted` property remains set to `'on'` until the component object no longer exists.

Check the value of the `BeingDeleted` property to verify that the object is not about to be deleted before querying or modifying it.

`CreateFcn` — Component creation function

function handle | cell array | character vector

Component creation function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

This property specifies a callback function to execute when MATLAB creates this component in the app. MATLAB initializes all property values before executing the `CreateFcn` callback. If you do not specify the `CreateFcn` property, then MATLAB executes a default creation function.

Use the `gcbo` function in your `CreateFcn` code to get the component that is being created.

Setting the `CreateFcn` property on an existing component has no effect.

Note: Do not call `copyobj` or `textwrap` (which calls `copyobj`) inside a `CreateFcn`. Copying the object causes the `CreateFcn` callback to execute repeatedly.

`DeleteFcn` — Component deletion function

function handle | cell array | character vector

Component deletion function, specified as one of these values:

- A function handle.
- A cell array in which the first element is a function handle. Subsequent elements in the cell array are the arguments to pass to the callback function.
- A character vector containing a valid MATLAB expression. For example, `'disp(''hello world'')'` calls the `disp` function. MATLAB evaluates this expression in the base workspace.

The `DeleteFcn` property specifies a callback function to execute when MATLAB deletes a component in an app. MATLAB executes the `DeleteFcn` callback before destroying

the properties of the object. If you do not specify the `DeleteFcn` property, then MATLAB executes a default deletion function.

Use the `gcbo` function in your `DeleteFcn` code to access the component that is being deleted.

Identifiers

`Type` — Type of graphics object

`'figure'`

This property is read-only.

Type of graphics object, returned as `'figure'`.

`Tag` — Object Identifier

`''` (default) | character vector

Object identifier, specified as a character vector. You can specify a unique `Tag` value to serve as an identifier for any component object in your app. When you need access to the object elsewhere in your code, you can use the `findobj` function to search for the object based on the `Tag` value.

Example: `'figure1'`

`UserData` — Data to associate with this component

empty array (default) | array

Data to associate with this component, specified as any array. Specifying `UserData` can be useful for sharing data values within and across apps you create programmatically.

Note: Do not use this property in apps you create with App Designer. For information on sharing data values within and across apps created with App Designer, see "Share Data Across Callbacks in App Designer".

Example: `[1 2 3]`

Example: `'April 21'`

Example: `struct('value1',[1 2 3],'value2','April 21')`

Example: `{[1 2 3],'April 21'}`

Parent/Children

`Parent` — Parent of `Figure` object

root object

This property is read-only.

Parent of `Figure` object, returned as a root object.

`Children` — Children of `Figure` object

empty `GraphicsPlaceholder` array (default) | 1-D array of component objects

Children of the `Figure` object, returned as an empty `GraphicsPlaceholder` or a one-dimensional array of component objects. The children can be any component, excluding another `Figure` object.

You cannot add or remove a child component using the `Children` property. Use this property to view the list of children or to reorder the children. The order of the children in this array reflects the front-to-back order (stacking order) of the components on the screen.

To add a child to this list, set the `Parent` property of the child component to the `Figure` object.

`HandleVisibility` — Visibility of object handle

`'off'`

This property is read-only.

Visibility of object handle, returned as `'off'`. This property provides information about the visibility of the `Figure` object in its parent's list of children. Because this property value is always set to `'off'`, the `Figure` object is not visible in its parent's list of children and it is not returned by functions that access objects by searching the object hierarchy or querying object properties. These functions include `gcf`, `get`, `findobj`, `clf`, and `close`.

Objects are valid even if their `HandleVisibility` property is set to `'off'`. If you have access to an object, you can set and get its properties, and pass it to any function that operates on objects.

See Also

See Also

`appdesigner` | `uifigure`

uigauge

(App Designer) Create circular, linear, ninety-degree, or semicircular gauge component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. Apps created with GUIDE or the `figure` function do not support gauge components.

Syntax

```
g = uigauge
g = uigauge(style)
g = uigauge(parent)
g = uigauge(parent,style)
g = uigauge( ___ ,Name,Value)
```

Description

`g = uigauge` creates a circular gauge in a new UI figure window and returns the `Gauge` object.

`g = uigauge(style)` specifies the gauge style.

`g = uigauge(parent)` creates the gauge in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`g = uigauge(parent,style)` creates a gauge of the specified style in the specified parent container.

`g = uigauge( ___ ,Name,Value)` specifies object properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`style` — Type of gauge

`'circular'` (default) | `'linear'` | `'ninetydegree'` | `'semicircular'`

Type of gauge, specified as any one of the following values:

Style	Default Visual
`'circular'`	
`'linear'`	
`'ninetydegree'`	
`'semicircular'`	

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Each type of gauge supports a different set of properties. For a full list of properties and descriptions for each type, see the associated property page.

- Gauge Properties
- SemicircularGauge Properties
- NinetyDegreeGauge Properties
- LinearGauge Properties

Examples

Create Circular Gauge in UI Figure Window

```
fig = uifigure;
cg = uigauge(fig);
```

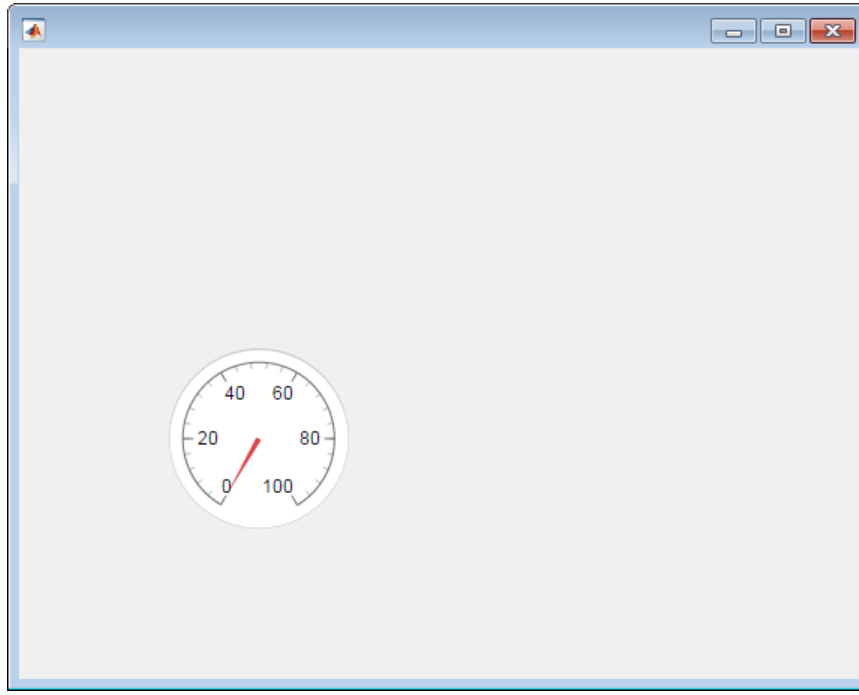

Create Linear Gauge in UI Figure Window

```
fig = uifigure;
lg  = uigauge(fig,'linear');
```

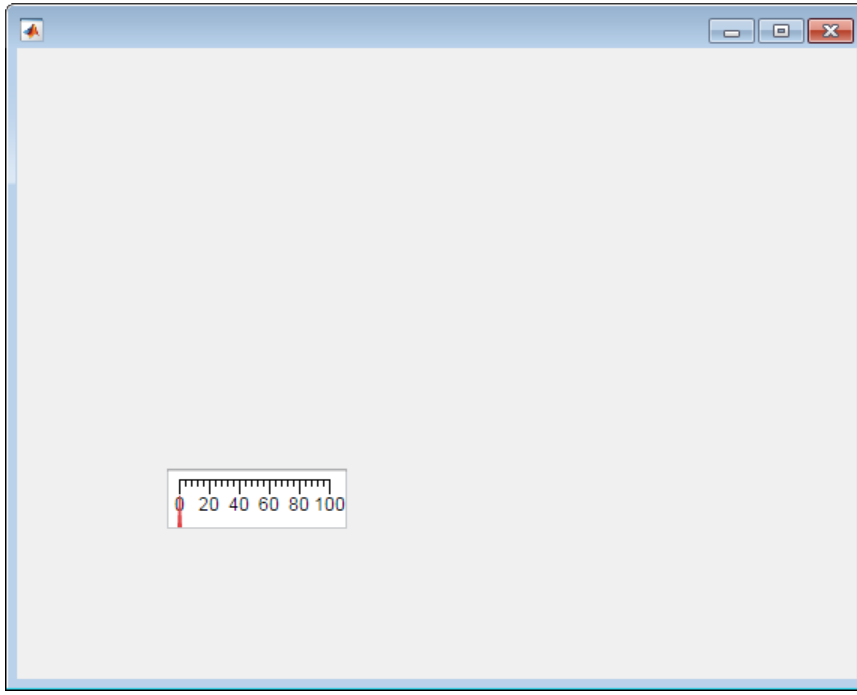

Create Linear Gauge in Panel

Specify a panel as the parent container for a linear gauge.

```
fig = uifigure;
pnl = uipanel(fig);
lg = uigauge(pnl,'linear');
```

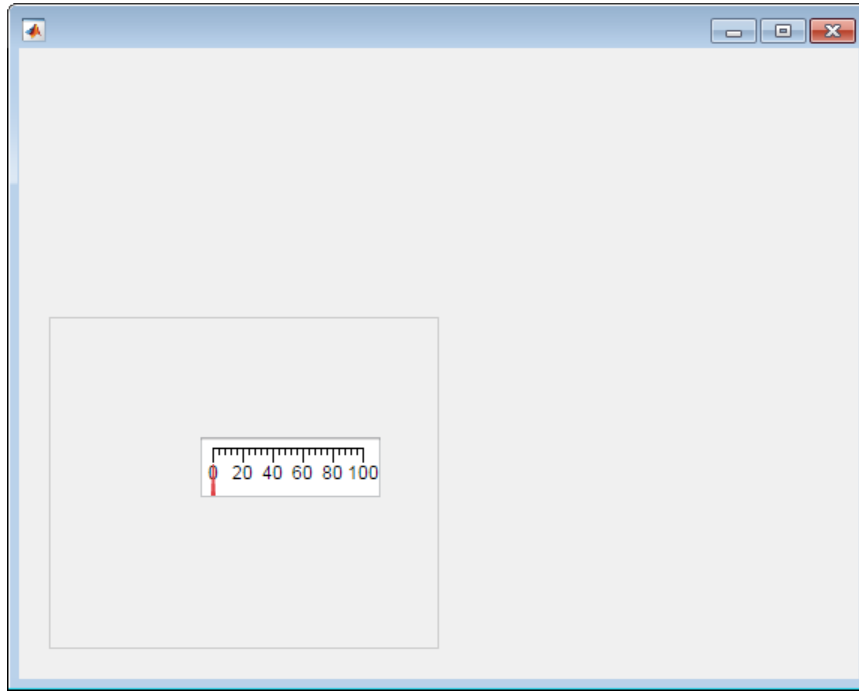

Set and Access Gauge Property Values

Create a circular gauge, and set the `ScaleDirection` property to specify that the needle moves counterclockwise.

```
fig = uifigure;
cg = uigauge(fig,'ScaleDirection','counterclockwise');
```

Change the number of major ticks, specify matching tick labels, and remove minor ticks.

```
cg.MajorTicks = [0:10:100];
cg.MajorTickLabels = {'0','10','20','30','40','50','60','70','80','90','100'};
cg.MinorTicks = [];
```

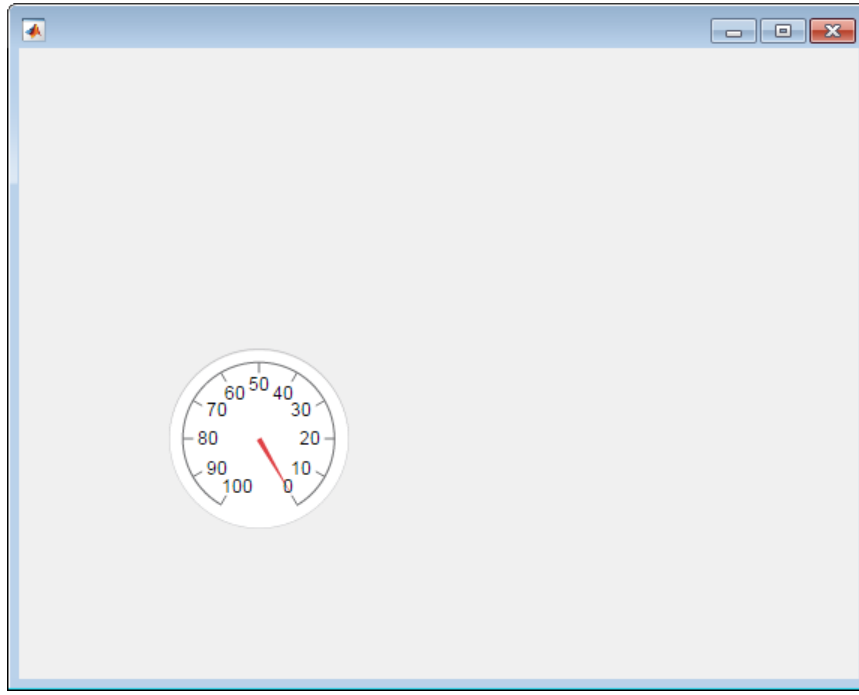

Specify Scale Colors and Color Limits

```
fig = uifigure;
cg = uigauge(fig,'ScaleColors',{'yellow','red'},...
                 'ScaleColorLimits', [60 80; 80 100]);
```

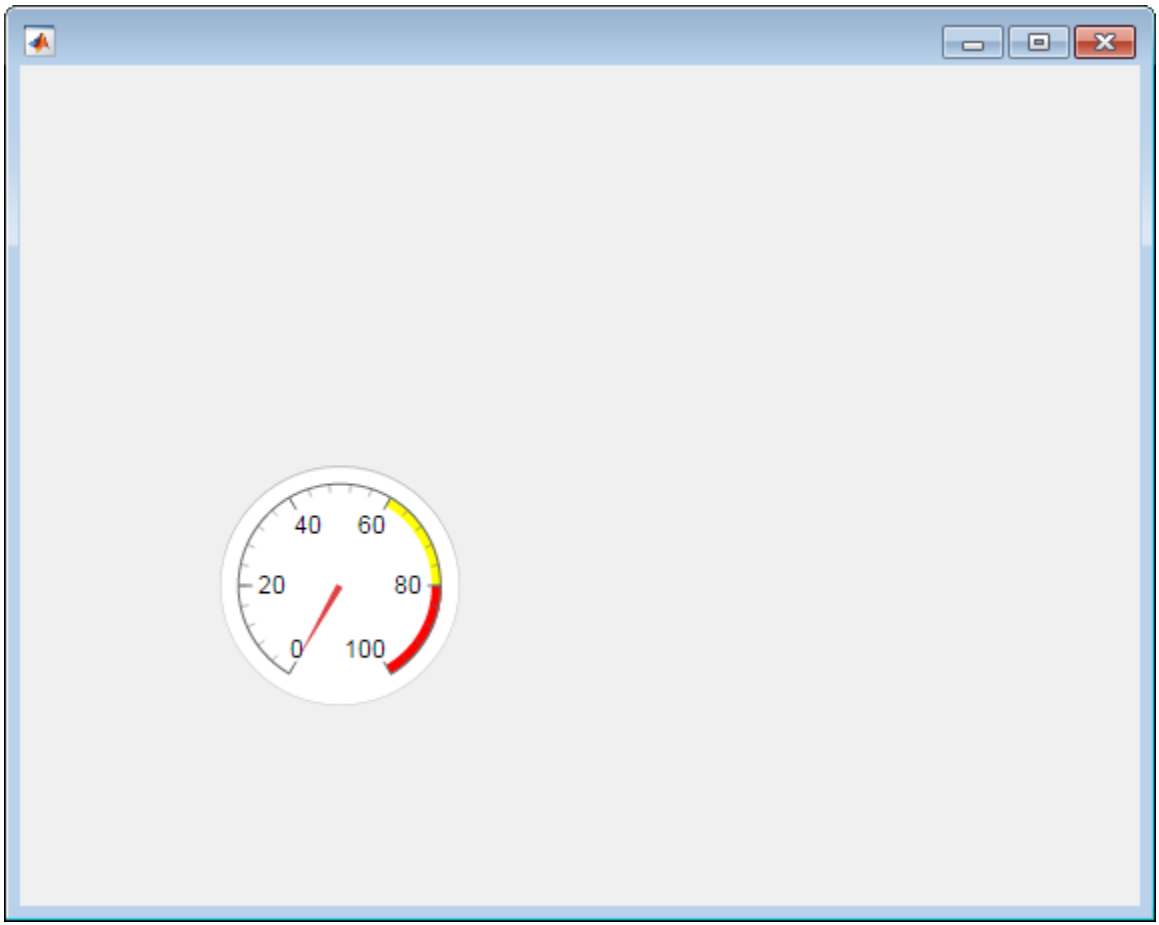

See Also

See Also

Functions

`appdesigner` | `uifigure`

Properties

Gauge Properties | LinearGauge Properties | NinetyDegreeGauge Properties | SemicircularGauge Properties

Introduced in R2016a

uiknob

(App Designer) Create continuous or discrete knob component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. Apps created with GUIDE or the `figure` function do not support knob components.

Syntax

```
kb = uiknob
kb = uiknob(style)
kb = uiknob(parent)
kb = uiknob(parent,style)
kb = uiknob( ___ ,Name,Value)
```

Description

`kb = uiknob` creates a knob component in a new UI figure window and returns the `Knob` object.

`kb = uiknob(style)` specifies the knob style.

`kb = uiknob(parent)` creates the knob in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`kb = uiknob(parent,style)` creates a knob of the specified style in the specified parent container.

`kb = uiknob( ___ ,Name,Value)` specifies object properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`style` — Type of knob

`'continuous'` (default) | `'discrete'`

Type of knob, specified as one of the following values:

Style	Default Visual
`'continuous'`	
`'discrete'`	

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Each type of knob object supports a different set of properties. For a full list of properties and descriptions for each type, see the associated property page.

- Knob Properties

- DiscreteKnob Properties

Examples

Create Continuous Knob

```
fig = uifigure;
kb = uiknob(fig);
```

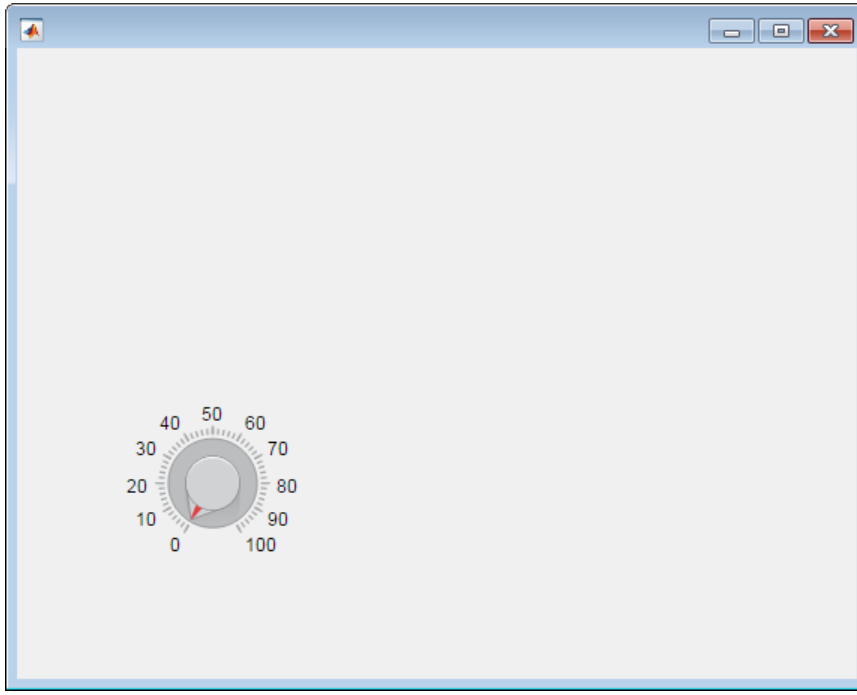

Create Discrete Knob

Specify a `Figure` object as the parent container.

```
fig = uifigure('Position',[100 100 300 250]);
```

```
kb = uiknob(fig,'discrete');
```

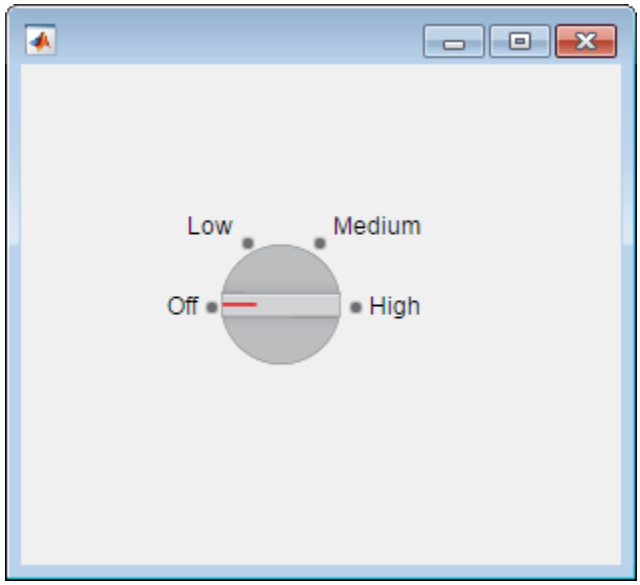

Set and Access Continuous Knob Property Values

Create a continuous knob in a UI figure window.

```
fig = uifigure;
kb = uiknob(fig);
```

Determine the knob limits.

```
limits = kb.Limits

limits =

     0   100
```

Change the limits and the knob value.

```
kb.Limits = [-10 10];
kb.Value = 5;
```

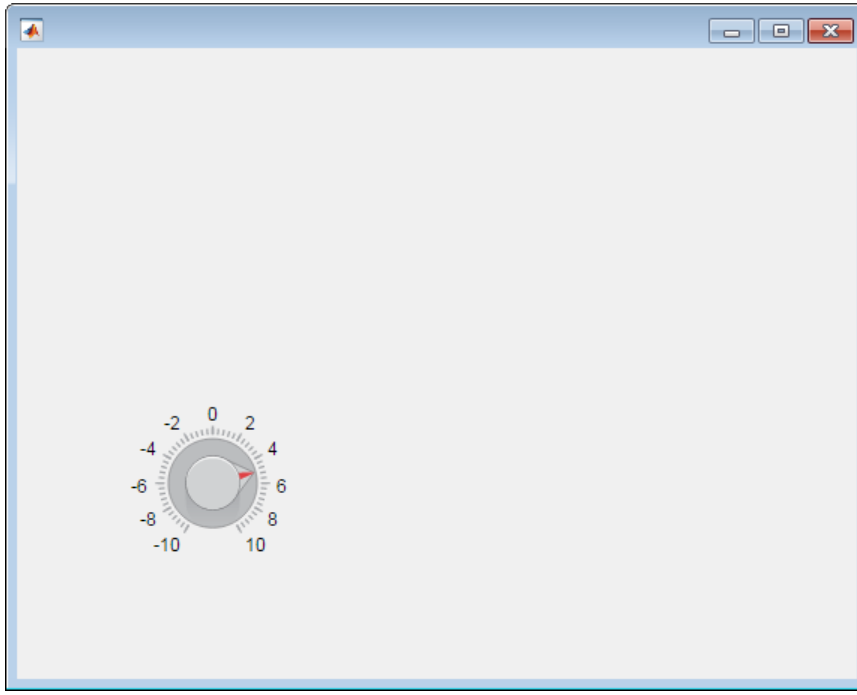

Set and Access Property Values

Create a discrete knob.

```
fig = uifigure;
kb = uiknob(fig,'discrete');
```

Change the knob states. Set the data associated with the knob states to reflect temperatures in degrees Fahrenheit.

```
kb.Items = {'Cold', 'Warm', 'Hot'};
kb.ItemsData = {32, 80, 212};
```

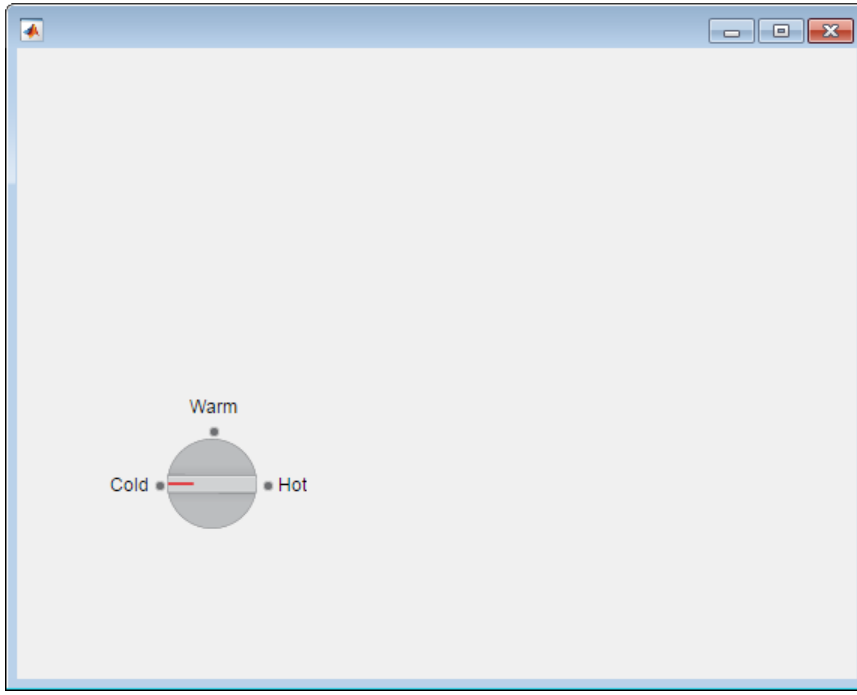

Get the temperature associated with the current knob value.

```
degrees = kb.Value
```

```
degrees =

    32
```

Code Response to Changed Discrete Knob Setting

Create a discrete knob that performs an action after the app user turns it. Turning the knob updates the value of a text field to reflect the app user's choice.

Copy and paste the following code into a file named `displayknobvalue.m` on your MATLAB path. This code creates a window containing a discrete knob and a text field. It specifies a `ValueChangedFcn` callback to update the text field when the knob is turned.

```
function displayKnobValue
```

```
% Create UI figure window

fig = uifigure('Position',[100 100 283 275]);

% Create the text field
txt = uieditfield(fig,'text',...
    'Position', [69 82 100 22]);

% Create the knob
kb = uiknob(fig,'discrete',...
    'Position',[89 142 60 60],...
    'ValueChangedFcn',@(kb,event) knobTurned(kb,txt));
end

% Code the knob callback function
function knobTurned(knob,txt)
txt.Value = knob.Value;
end
```

Run `displayKnobValue`, and then turn the knob. When you release the mouse button, the edit field is updated to reflect the new knob value.

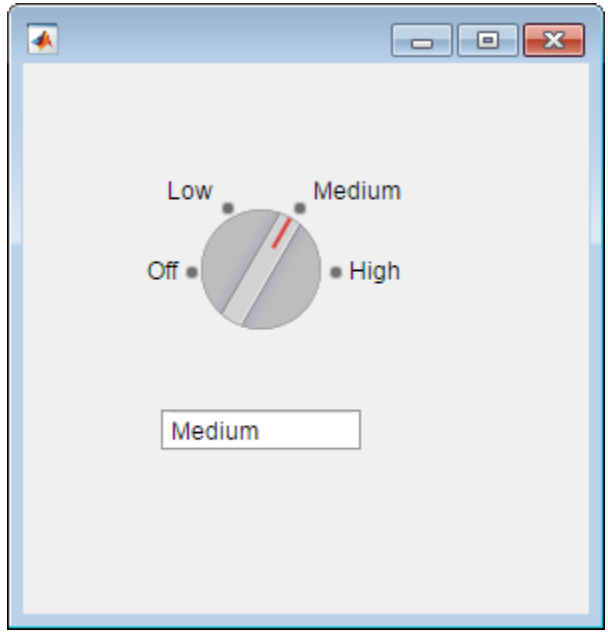

Code Response to Changed Continuous Knob Setting

Create a continuous knob that performs an action after the user turns it. Turning the knob updates the value of a label to reflect the user's choice.

Copy and paste the following code into a file named `showknobvalue.m` on your MATLAB path. This code creates a window containing a continuous knob and a label field. It specifies a `ValueChangedFcn` callback to update the label when the knob is turned.

```
function showKnobValue
% Create UI figure window and components
fig = uifigure('Position',[100 100 283 275]);

% Create label
lbl = uilabel(fig,...
    'Position',[218 177 50 15],...
    'Text','0');

% Create knob
```

```
kb = uiknob(fig,...
    'Position',[89 142 60 60],...
    'ValueChangedFcn', @(kb,event) knobTurned(kb,lbl));
end

% Create ValueChangedFcn callback
function knobTurned(kb,lbl)
num = kb.Value;
lbl.Text = num2str(num);
end
```

Run `showKnobValue` and turn the knob. When you release the mouse button, the label is updated to reflect the new knob value.

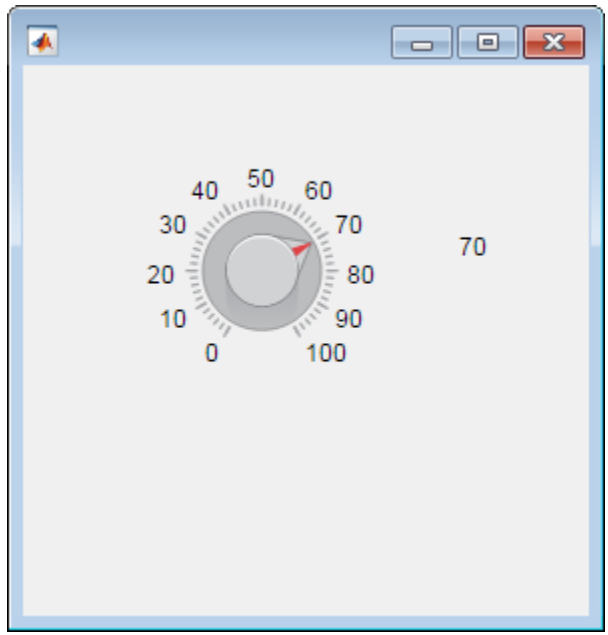

Code Response to Changing Continuous Knob Setting

Create a continuous knob that repeatedly performs an action as the user is turning it. Instead of updating a label just once when the user releases the mouse button, this knob makes changes to the label as the knob is being turned.

Copy and paste the following code into a file named `showchangingvalue.m` on your MATLAB path. This code creates a window containing a continuous knob and a label field. It specifies a `ValueChangingFcn` callback to keep updating the label as the knob is being turned.

```
unction showChangingValue
% Create UI figure window
fig = uifigure('Position',[100 100 283 275]);

% Create numeric edit field
num = uieditfield(fig,'numeric',...
    'Position',[69 82 100 20]);

% Create knob
kb = uiknob(fig,...
    'Position',[89 142 60 60],...
    'ValueChangingFcn',@(kb,event) knobTurned(kb,event,num));
end

% Create ValueChangingFcn callback
function knobTurned(kb,event,num)
num.Value = event.Value;
end
```

Run `showChangingValue`, and turn the knob. As you do so, the numeric edit field is updated to show the changing knob values.

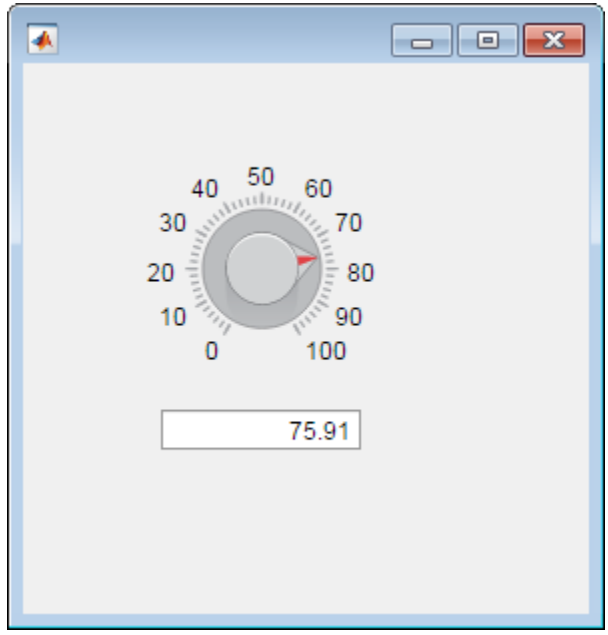

Code Response to Invalid Knob Setting

Create a continuous knob that performs an action after the user turns it. each turn of the knob causes MATLAB to perform a calculation using the current and previous knob values.

Copy and paste the following code into a file named `increaseOnly.m` on your MATLAB path. This code creates a window containing a continuous knob. It specifies a `ValueChangedFcn` callback for the knob to display an **Invalid Value** dialog box if the app user attempts to decrease the knob value.

```
function increaseOnly
% Create UI figure window
fig = uifigure('Position',[100 100 400 275]);

% Create knob
kb = uiknob(fig,...
    'Position',[150 125 60 60],...
    'ValueChangedFcn',@(kb,event) nValChanged(kb,event,fig));
end
```

```
% Create ValueChangedFcn callback
function nValChanged(kb,event,fig)
newvalue = event.Value;
previousvalue = event.PreviousValue;
if previousvalue >  newvalue
   uialert(fig, 'Increase value only. Value reverted to previous value.',...
        'Invalid Value');
   kb.Value = previousvalue;
end
end
```

Run `increaseOnly`, increase the knob value, and then try to decrease it. When you try to decrease the value, an error dialog box displays and the value is reverted to the previous valid value. You can only increase the knob value.

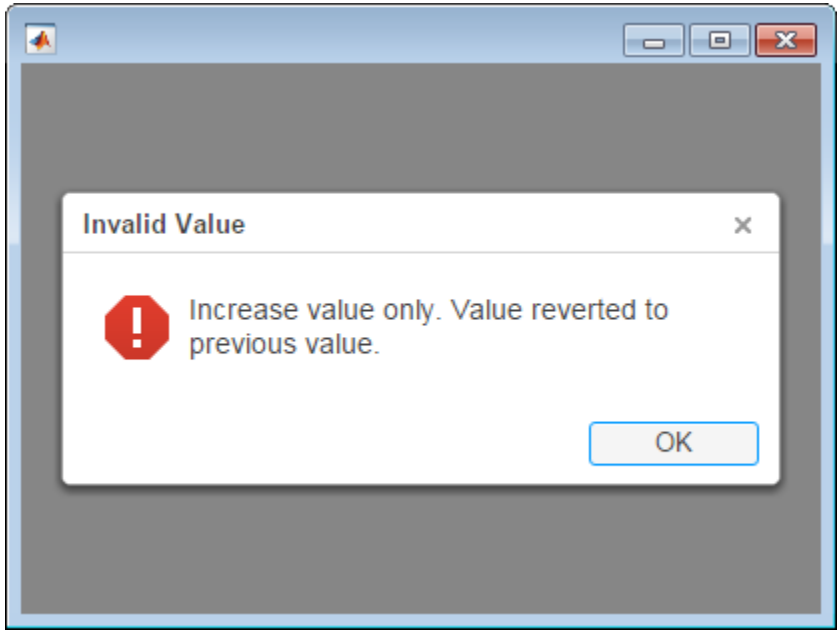

See Also

See Also

Functions
`appdesigner` | `uifigure`

Properties
DiscreteKnob Properties | Knob Properties

Introduced in R2016a

uilabel

(App Designer) Create label component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create labels using `uicontrol`.

Syntax

```
lbl = uilabel
lbl = uilabel(parent)
lbl = uilabel( ___ ,Name,Value)
```

Description

`lbl = uilabel` creates a label component with the text `'Label'` in a new UI figure window and returns a `Label` object.

`lbl = uilabel(parent)` creates the label in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`lbl = uilabel( ___ ,Name,Value)` specifies label properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see .Label Properties.

Example: `'Text','Sum:'` specifies the label displays the text `Sum:`.

`'Text'` — Label text

`'Label'` (default) | character vector | cell array of character vectors

Label text, specified as a character vector or a cell array of character vectors. Use a cell array of character vectors to specify a multiline label.

Alternatively, use the `sprintf` function to create formatted text containing line breaks and other special characters.

```
text = sprintf('%s\n%s','Line 1','Line 2');
label = uilabel('Text',text,'Position',[100 100 100 32]);
```

If you specify text as a character vector without using `sprintf`, MATLAB will not automatically interpret control sequences like "\n".

```
text = 'Line 1\nLine2'
label = uilabel('Text',text,'Position',[100 100 100 32])
```



Example: `'Threshold'`

Example: `{'Threshold' 'Value'}`

`'Position'` — Label location and size

`[100 100 31 15]` (default) | `[left bottom width height]`

Label location and size, relative to the parent, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the label
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the label
`width`	Distance between the right and left outer edges of the label
`height`	Distance between the top and bottom outer edges of the label

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

All measurements are in pixel units.

Example: `[100 100 100 20]`

Examples

Create Label Component in UI Figure Window

```
f = uifigure;
label = uilabel(f);
```

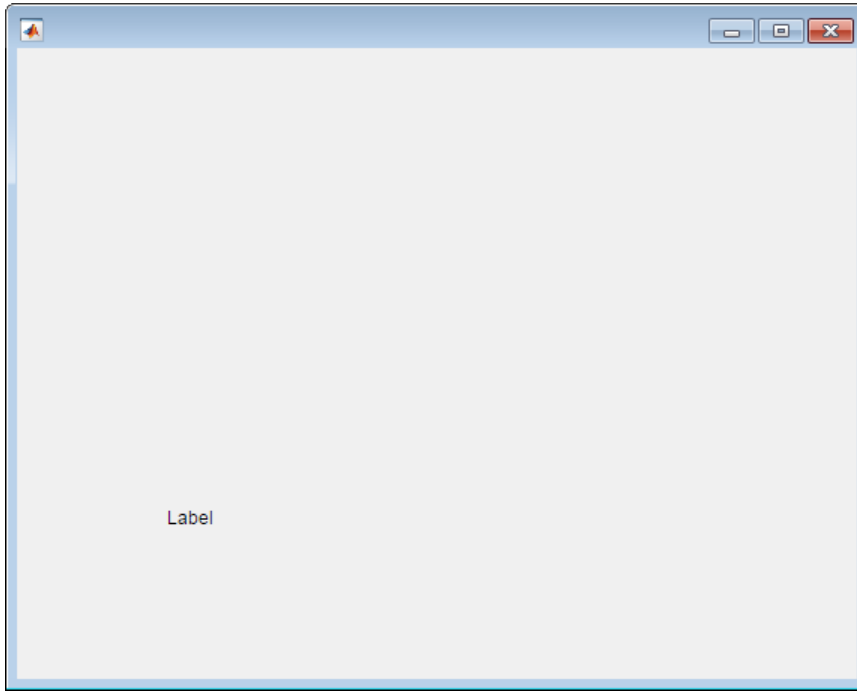

Create Label Component in Panel

Specify a `Panel` as the parent.

```
fig = uifigure;
pnl = uipanel(fig);
lbl = uilabel(pnl);
```

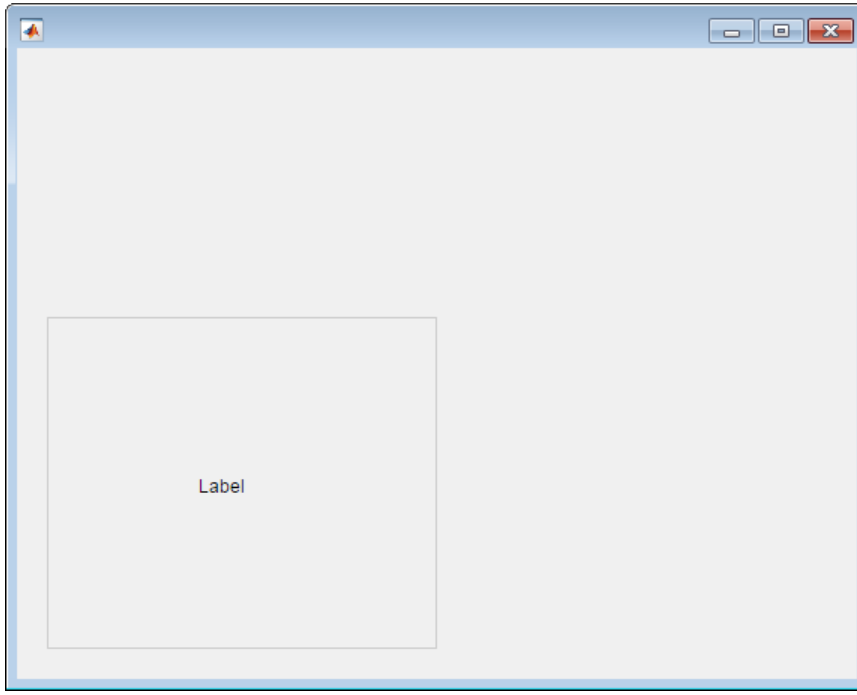

Set and Access Label Component Properties

Create a default label.

```
fig = uifigure;
lbl = uilabel(fig);
```

Change the label text and font size.

```
lbl.Text = 'Result';
lbl.FontSize = 14;
```

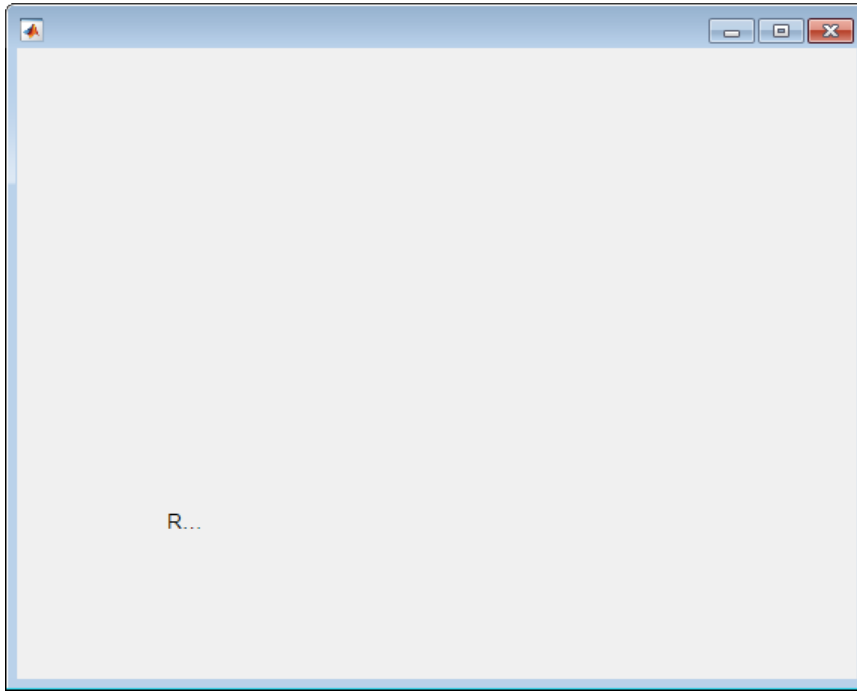

The label is clipped because the current label size is too small for the new text at the new font size.

Determine the current label size by getting the third and fourth elements of the `Position` property value.

```
size = lbl.Position(3:4)
```

```
size =

    31    15
```

Change the label size to accommodate the new text.

```
lbl.Position(3:4) = [62 22];
```

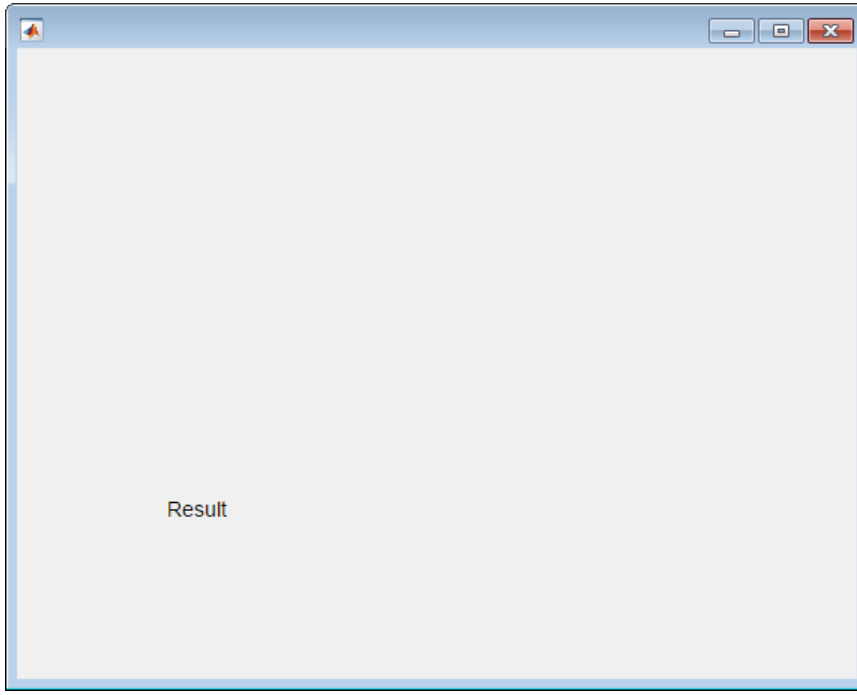

See Also

See Also

Functions
`appdesigner` | `uifigure`

Properties
Label Properties

Introduced in R2016a

uilamp

(App Designer) Create lamp component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. Apps created with GUIDE or the `figure` function do not support lamp components.

Syntax

```
lmp = uilamp
lmp = uilamp(parent)
lmp = uilamp( ___ ,Name,Value)
```

Description

`lmp = uilamp` creates a lamp component in a new UI figure window and returns a `Lamp` object.

`lmp = uilamp(parent)` creates the lamp in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`lmp = uilamp( ___ ,Name,Value)` specifies `Lamp` properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see Lamp Properties.

Example: `'Color','red'` specifies that the lamp color is red.

`'Color'` — Color of lamp

[0 1 0] (default) | RGB triplet | short name | long name

Color of the lamp, specified as an RGB triplet, short name, or long name. The color you specify fills the area bounded by the lamp.

An RGB triplet is a three-element row vector whose elements specify the intensities of the red, green, and blue components of the color. The intensities must be in the range `[0,1]`; for example, `[0.4 0.6 0.7]`. This table lists the long and short color name options and the equivalent RGB triplet values.

Long Name	Short Name	RGB Triplet
`'yellow'`	`'y'`	`[1 1 0]`
`'magenta'`	`'m'`	`[1 0 1]`
`'cyan'`	`'c'`	`[0 1 1]`
`'red'`	`'r'`	`[1 0 0]`
`'green'`	`'g'`	`[0 1 0]`
`'blue'`	`'b'`	`[0 0 1]`
`'white'`	`'w'`	`[1 1 1]`
`'black'`	`'k'`	`[0 0 0]`

Data Types: `double` | `char`

`'Position'` — Location and size of lamp

`[100 100 20 20]` (default) | `[left bottom width height]`

Location and size of the lamp, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the lamp
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the lamp
`width`	Distance between the right and left outer edges of the lamp
`height`	Distance between the top and bottom outer edges of the lamp

All measurements are in pixel units.

Due to aspect ratio constraints, you cannot change the lamp height and width independently of one another.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 200 20 20]`

Examples

Create Lamp In UI Figure Window

```
fig = uifigure;
lmp = uilamp(fig);
```

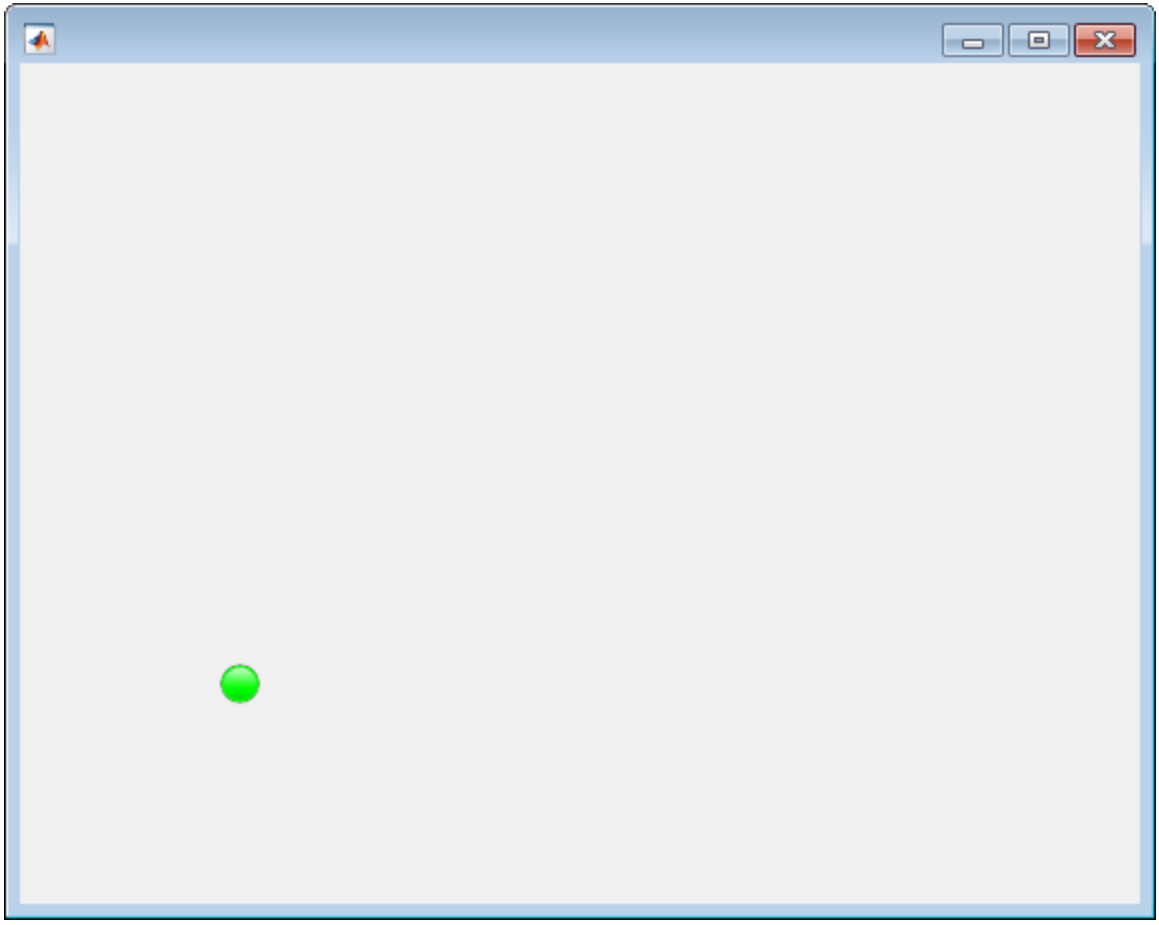

Create Lamp in Panel

```
fig = uifigure;
pnl= uipanel(fig);
lmp = uilamp(pnl);
```

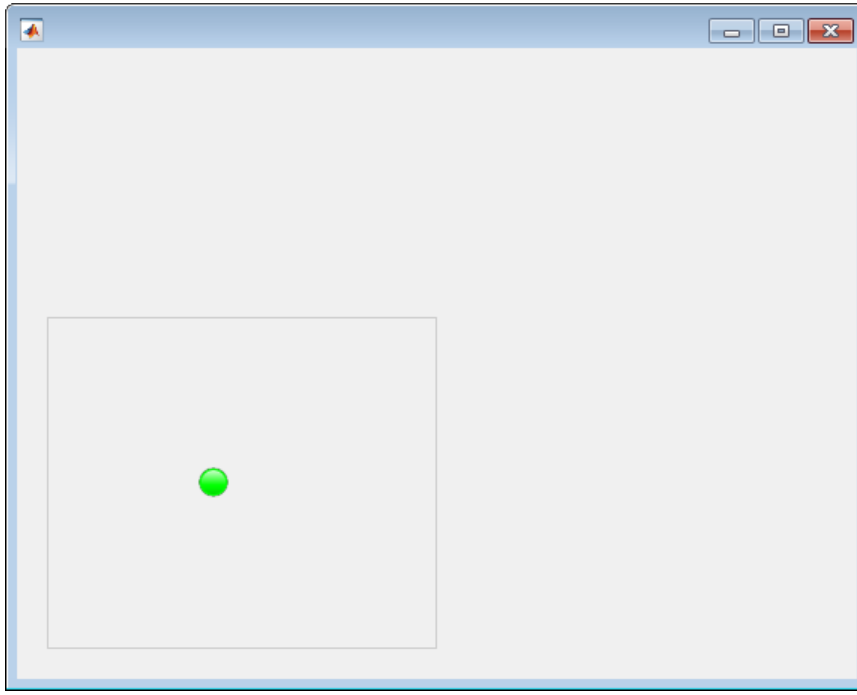

Set and Access Lamp Properties

Create a default lamp.

```
fig = uifigure;
lmp = uilamp(fig);
```

Determine the current color of the lamp.

```
color = lmp.Color
```

```
color =

     0     1     0
```

MATLAB returns the RGB value for green.

Change the lamp color to red by setting the `Color` property to the long name, `'red'`.

```
lmp.Color = 'red';
```

Change the lamp color to blue by setting the `Color` property to the RGB triplet for blue.

```
lmp.Color = [0 0 1];
```

See Also

See Also

Functions
`appdesigner` | `uifigure`

Properties
Lamp Properties

Introduced in R2016a

uilistbox

(App Designer) Create list box component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create a list box using `uicontrol`.

Syntax

```
lb = uilistbox
lb = uilistbox(parent)
lb = uilistbox( ___ ,Name,Value)
```

Description

`lb = uilistbox` creates a list box in a new UI figure window and returns a `ListBox` object.

`lb = uilistbox(parent)` creates the list box in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`lb = uilistbox( ___ ,Name,Value)` specifies `ListBox` properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see ListBox Properties.

Example: `'Items',{'Model 1','Model 2', 'Model 3', 'Model 4'}` specifies the list box options that the app user sees, from top to bottom.

`'Value'` — List box selection
`'Item 1'` (default) | `Items` value | `ItemsData` value | `{}`

List box selection, specified as an element from the `Items` property, an element from the `ItemsData` property, or an empty cell array. The default list box selection is the first element of the `Items` array.

Specify an element from the `Items` property to list items that are not associated with any data. Specify an element from the `ItemsData` property when your list items have specific data associated with them. To specify no selection, set the `Value` property to an empty cell array.

When the app is running, and user selects an item in the list box, the `Value` property changes. The new value depends on whether the `ItemsData` property is empty:

- If `ItemsData` is empty, then the new value is the selected element in the `Items` property.
- If `ItemsData` is not empty, then the new value is the corresponding element from the `ItemsData` property.

You can allow your users to select multiple list items by setting the `Multiselect` property to `'on'`. When the user selects multiple items, the `Value` property contains multiple values.

Programmatic Changes When `ItemsData` Is Empty

Suppose all of the following are true:

- The `Items` property value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is empty.
- The app user has the second element, `Blue`, selected in the list box.

If the `Items` value changes programmatically to `{'Pink','Blue','Aqua'}`, then the element selected before the programmatic change is an element of the updated `Items` value. In this case, the `Value` remains `'Blue'` and the list box selection remains the second list box element.

If the `Items` value changes programmatically to `{'Red','Teal','Green'}`, then the list box element selected before the programmatic change is not an element of the updated `Items` value. In this case, the `Value` becomes the first element of the `Items` value (`'Red'`) and the list box selection becomes the first list box element.

Programmatic Changes When `ItemsData` Is Not Empty

Suppose all of the following are true:

- The `Items` value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is originally `[10 20 30]`.
- The app user has the second element, `Blue`, selected in the list box.

If the `ItemsData` property changes programmatically to `[0 10 20]`, then the app user selection corresponds to an element of `ItemsData` that is the same before and after the programmatic change (20). However, 20 now corresponds to the third `Items` element. So the third list box element (Blue) is selected, even though the `Value` remains unchanged.

If the `ItemsData` property changes programmatically to `[10 100 1000]`, then the app user selection corresponds to an element of `ItemsData` that no longer exists. In this case, the `Value` becomes the first element of `ItemsData` (10) and the first list box element (Red) is selected.

Programmatic Changes Resulting in Duplicate `ItemsData` Values

Suppose all of the following are true:

- The `Items` value is `{'Red','Blue','Green'}`.
- The `ItemsData` value is originally `[10 20 20]`.
- The app user has the first element, `'Red'`, selected in the list box before the programmatic change.

If the `Value` property changes programmatically to `20`, then the list box selection becomes the first element of `Items` that matches that value, namely, `'Blue'`.

`'Items'` — List box options presented to app user
`{'Item 1','Item 2', 'Item 3', 'Item 4'}` (default) | 1-by-n cell array of character vectors

List box options presented to the app user, specified as a 1-by-n cell array of character vectors. Duplicate elements are allowed. The list box displays as many options as there are elements in the `Items` property value.

`'ItemsData'` — Data associated with each element of the `Items` property value
empty array ([ ]) (default) | 1-by-n numeric array | 1-by-n cell array

Data associated with each element of the `Items` property value, specified as a 1-by-n numeric array or a 1-by-n cell array. Duplicate elements are allowed.

For example, if you set the `Items` value to employee names, you might set the `ItemsData` value to corresponding employee ID numbers. The `ItemsData` value is not visible to the app user.

If the number of array elements in the `ItemsData` value and the `Items` value do not match, one of the following occurs:

- When the `ItemsData` value is empty, then all the elements of the `Items` value are presented to the app user.
- When the `ItemsData` value has more elements than the `Items` value, then all the elements of the `Items` value are presented to the app user. MATLAB ignores the extra `ItemsData` elements.
- When the `ItemsData` value is not empty, but has fewer elements than the `Items` value, the only elements of the `Items` value presented to the app user are those that have a corresponding element in the `ItemsData` value.

Example: `{'One','Two','Three'}`

Example: `[10 20 30 40]`

`'Multiselect'` — Multiple element selectability

`'off'` (default) | `'on'`

Multiple element selectability, specified as `'on'` or `'off'`.

`'ValueChangedFcn'` — Code to execute when list box selection changes

`''` (default) | function handle | cell array | character vector

Code to execute when list box selection changes, specified as a function handle, a cell array containing a function handle and additional arguments, or a character vector.

This callback function can access specific information about the user's interaction with the list box. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the list box. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of list box after app user's most recent interaction with it
`PreviousValue`	Value of list box before app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` does not execute if the app user clicks the currently selected option, or if the `Value` property setting changes programmatically.

`'Position'` — Location and size of list box

`[100 100 100 74]` (default) | `[left bottom width height]`

Location and size of the list box relative to the parent container, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the list box
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the list box
`width`	Distance between the right and left outer edges of the list box
`height`	Distance between the top and bottom outer edges of the list box

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 200]`

Examples

Create List Box

Create a list box in a UI figure window.

```
fig = uifigure('Position', [100 100 300 250]);
lbx = uilistbox(fig);
```

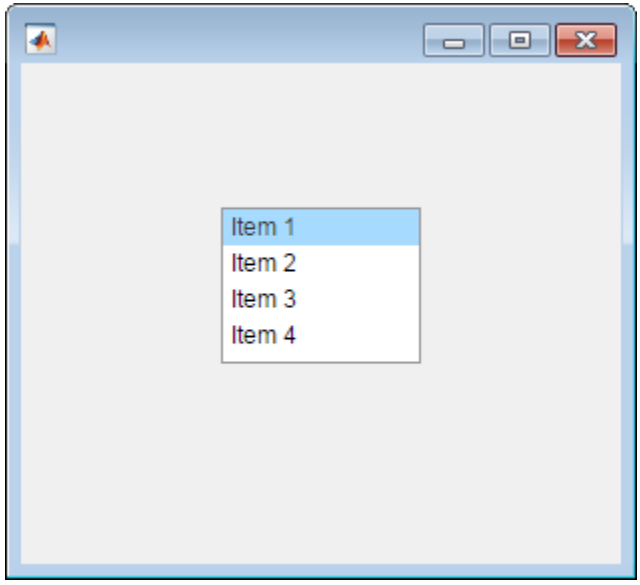

Set and Access List Box Property Values

Create a list box.

```
fig = uifigure;
lbx = uilistbox(fig);
```

Determine whether the list box allows multiple selections.

```
multi = lbx.Multiselect
```

```
multi =

     off
```

Enable multiselection.

```
lbx.Multiselect = 'on';
```

Display List Box Selection

Create a list box that performs an action when the user selects an item in the list.

Save the following code as `selectlistbox.m` on your MATLAB path.

This code creates an app containing a list box and a text area. The `ValueChangedFcn` callback updates the text area to display the list box selection.

```
function selectlistbox

fig = uifigure('Position',[100 100 350 275]);

% Create text area
txt = uitextarea(fig,...
    'Position',[125 90 100 22],...
    'Value','First');

% Create list box
lbox = uilistbox(fig,...
    'Position',[125 120 100 78],...
    'Items',{'First','Second','Third'},...
    'ValueChangedFcn', @updateEditField);

% ValueChangedFcn callback
function updateEditField(src,event)
    txt.Value = src.Value;
end

end
```

Run `selectlistbox` and select an option from the list.

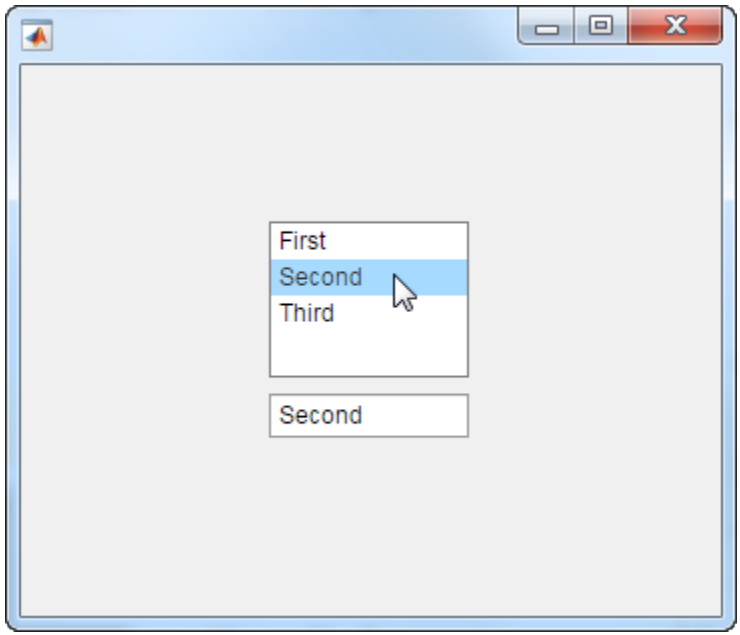

Display List Box Data

Create a list box that has a numeric value associated with each item. When the user selects an item in the list box, the edit field displays the associated numeric value.

Save the following code as `dataselection.m` on your MATLAB path. This code creates an app containing a list box and a numeric edit field. Each item in the list has a temperature associated with it. When the user selects an item in the list, the `ValueChangedFcn` callback displays the corresponding temperature in the edit field.

```
function dataselection
fig = uifigure('Position',[100 100 350 275]);

% Create Numeric Edit Field
ef = uieditfield(fig,'numeric',...
    'Position',[125 90 100 22]);

% Create List Box
lbox = uilistbox(fig,...
    'Items', {'Freezing', 'Warm', 'Hot', 'Boiling'},...
    'ItemsData', [0, 25, 40, 100],...
```

```
    'Position',[125 120 100 78],...
    'ValueChangedFcn', @selectionChanged);

% ValueChangedFcn callback
function selectionChanged(src,event)
    % Display list box data in edit field
    ef.Value = src.Value;
end

end
```

Run `dataselection` and select an item in the list. The numeric edit field updates to reflect the temperature associated with the selection.

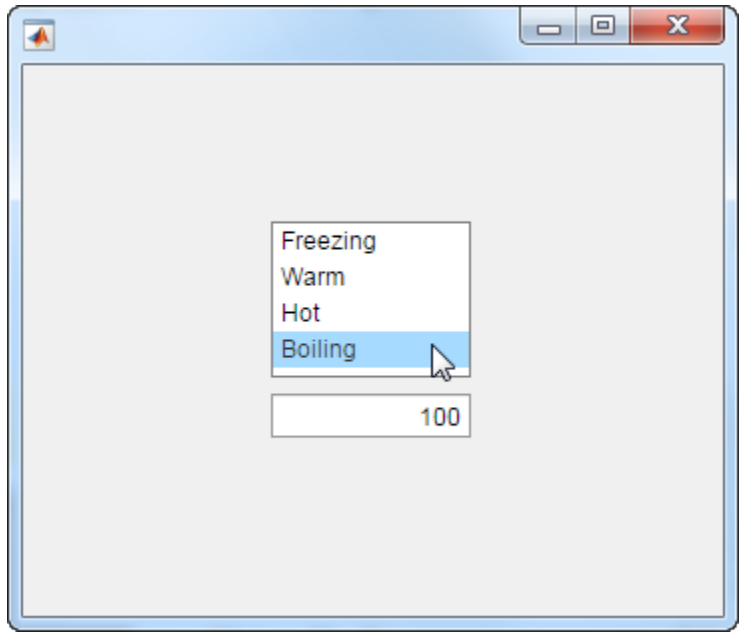

List Box That Allows Selection of Multiple Items

Create an app containing a list box that allows multiple items to be selected. Write the `ValueChangedFcn` callback to display the selected items in the text area below the list box.

Save the following code as `multiselect.m` on your MATLAB path.

```
function multiselect
fig = uifigure('Position',[100 100 350 275]);

% Create Text Area
txt = uitextarea(fig,...
    'Position',[125 80 100 50]);

% Create List Box
lbox = uilistbox(fig,...
    'Position',[125 150 100 78],...
    'Multiselect','on',...
    'ValueChangedFcn',@selectionChanged);

% ValueChangedFcn callback
function selectionChanged(src,event)
    txt.Value = src.Value;
end

end
```

Run `multiselect` and select items from the list. The text area displays your selection.

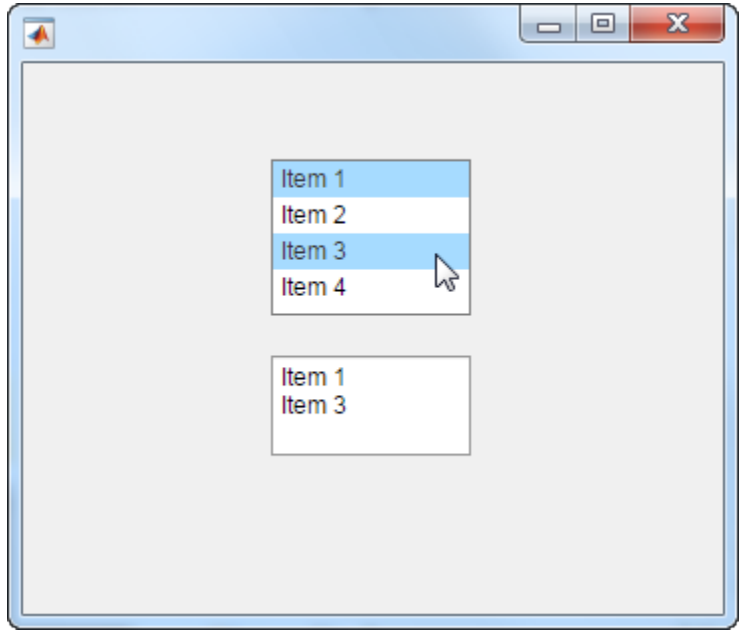

Tips

Use the `scroll` function to programmatically scroll a list box item or the top or bottom of the list into view.

See Also

See Also

Functions
`appdesigner` | `scroll` | `uifigure`

Properties
ListBox Properties

Introduced in R2016a

uiradiobutton

(App Designer) Create radio button component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create a radio button using `uicontrol`.

Syntax

```
rb = uiradiobutton
rb = uiradiobutton(parent)
rb = uiradiobutton( ___ ,Name,Value)
```

Description

`rb = uiradiobutton` creates a radio button within a button group in a UI figure and returns the `RadioButton` object.

`rb = uiradiobutton(parent)` creates the radio button within the specified button group. The button group must be child of a `Figure` created with the `uifigure` function.

`rb = uiradiobutton( ___ ,Name,Value)` specifies `RadioButton` properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`parent` — Parent container
`ButtonGroup` object

Parent container, specified as a `ButtonGroup` object. The parent must be a `ButtonGroup` object within a `Figure` created using the `uifigure` function.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see RadioButton Properties.

Example: `'Text', 'French'` specifies that the text "French" displays next to the radio button.

`'Value'` — State of radio button

`1` | `0`

State of radio button, specified as `1` (true) or `0` (false). Within a button group, only one button can be selected at a time. The state of the first radio button added to a button group is `1`, by default. Subsequent buttons added to the same button group have a default state of `0`.

When the `Value` property of a `RadioButton` changes to `1`, the `Value` of the property for the previously selected `RadioButton` changes to `0`. In addition, the `SelectedObject` property value of the parent `ButtonGroup` is updated.

If you programmatically change the `Value` property of a `RadioButton` to `0`, MATLAB sets the `Value` property of the first `RadioButton` *added* to the `ButtonGroup` to `1`. If the first `RadioButton` added is the one for which you programmatically set the `Value` property to `0`, then MATLAB sets the `Value` property for the second `RadioButton` added to the `ButtonGroup` to `1`.

Note: The first `RadioButton` *added* to a `ButtonGroup` is not necessarily the first `RadioButton` *listed* in the `Children` property of the `ButtonGroup`.

`'Text'` — Radio button text

`'Radio Button'` (default) | character vector

Radio button text, specified as a character vector.

Example: `'Steady state'`

`'Position'` — Radio button location and size
`[10 10 91 15]` (default) | `[left bottom width height]`

Radio button location and size, relative to the button group containing it, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the button group to the outer left edge of the radio button
`bottom`	Distance from the inner bottom edge of the button group to the outer bottom edge of the radio button
`width`	Distance between the right and left outer edges of the radio button (including text)
`height`	Distance between the top and bottom outer edges of the radio button

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[10 20 91 15]`

Examples

Create Radio Buttons Within a Button Group

Create a button group within a figure window.

```
fig = uifigure('Position',[680 678 398 271]);
bg = uibuttongroup(fig,'Position',[137 113 123 85]);
```

Create three `RadioButton` objects, and specify the parent and location of each.

```
rb1 = uiradiobutton(bg,'Position',[10 60 91 15]);
rb2 = uiradiobutton(bg,'Position',[10 38 91 15]);
rb3 = uiradiobutton(bg,'Position',[10 16 91 15]);
```

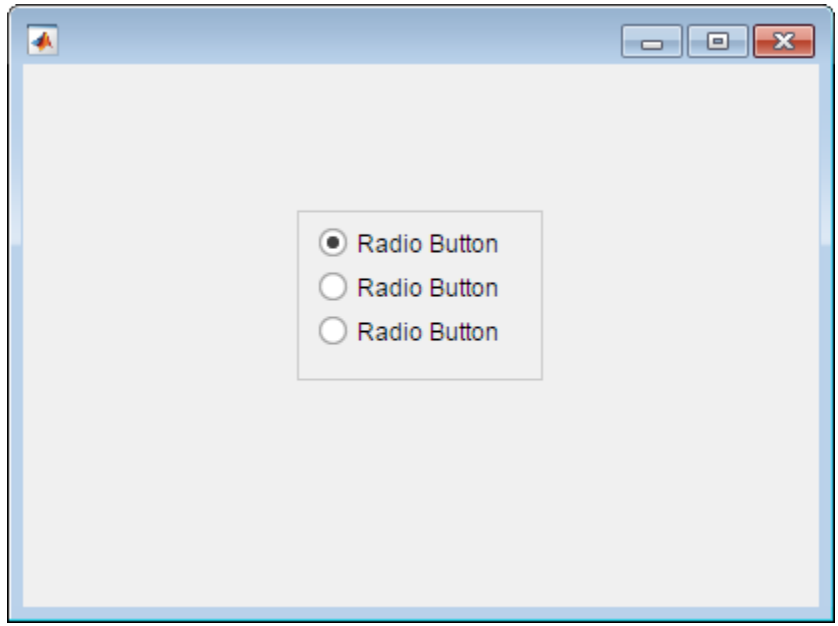

Change the text associated with each radio button.

```
rb1.Text = 'English';
rb2.Text = 'French';
rb3.Text = 'German';
```

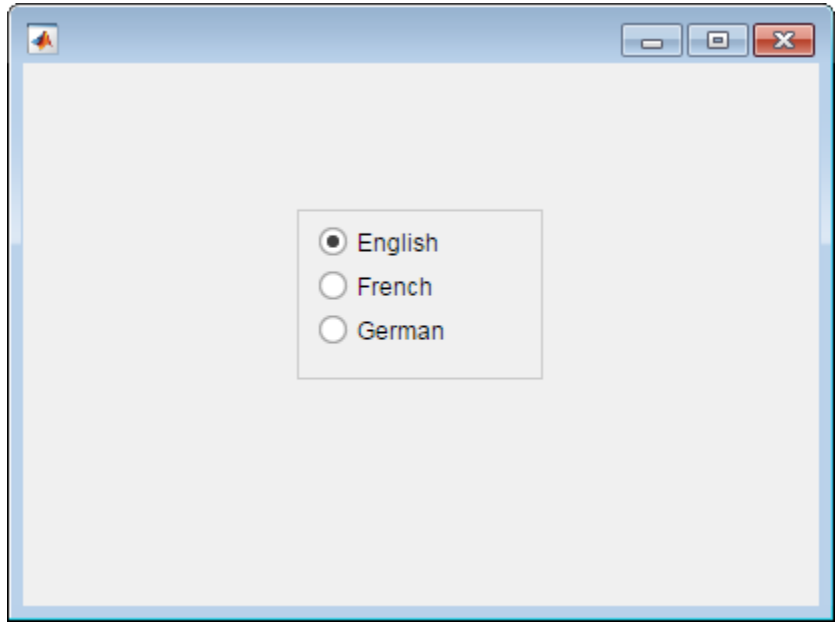

Change the radio button selection to German.

```
rb3.Value = true;
```

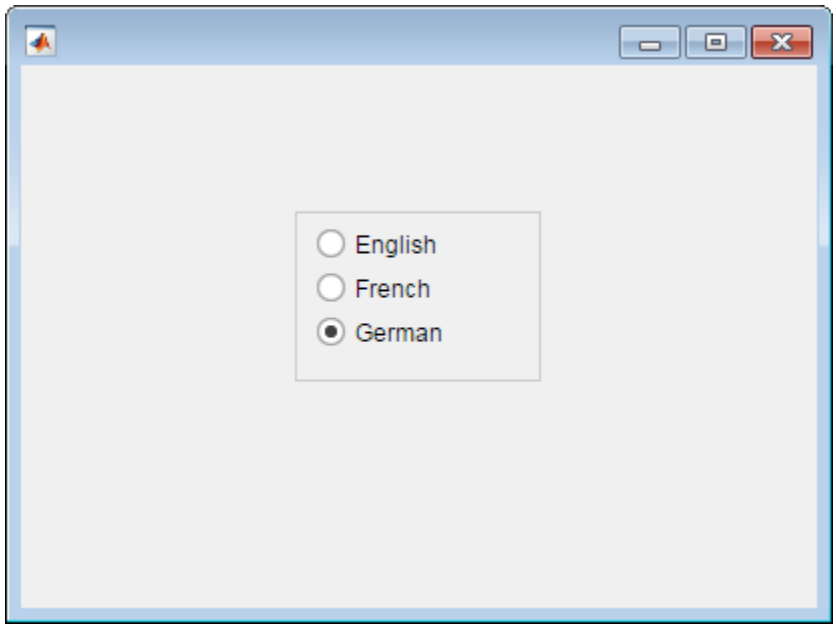

Determine the font name of the German radio button text.

```
font = rb3.FontName
```

```
font =

Helvetica
```

Tips

- Button groups can contain any UI component type, but can only manage the selection of radio buttons and toggle buttons.
- To make your program respond when the user selects a radio button or toggle button that is inside a button group. define a `SelectionChangedFcn` callback function for the `ButtonGroup`. You cannot define callbacks for the individual buttons.
- To determine which radio button or toggle button is selected, query the `SelectedObject` property of the `ButtonGroup`. You can execute this query anywhere in your code.

- If you set the `Visible` property of a button group object to `'off'`, then any child objects it contains become invisible along with the parent `ButtonGroup`. However, the `Visible` *property value* of each child object remains unaffected.

See Also

See Also

Functions

`appdesigner` | `uibuttongroup` | `uifigure`

Properties

RadioButton Properties

Introduced in R2016a

uislider

(App Designer) Create slider component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create a slider using `uicontrol`.

Syntax

```
sld = uislider
sld = uislider(parent)
sld = uislider( ___ ,Name,Value)
```

Description

`sld = uislider` creates a slider in a new UI figure window and returns the `Slider` object.

`sld = uislider(parent)` creates the slider in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`sld = uislider( ___ ,Name,Value)` specifies `Slider` properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see Slider Properties.

Example: `'Limits',[0 50]` specifies the minimum slider value as `0` and the maximum slider value as `50`.

`'Value'` — Slider value

0 (default) | numeric value

Slider value, specified as a numeric value. The numeric value must be within the range specified by the `Limits` property value.

`'Limits'` — Minimum and maximum slider values

[0 100] (default) | two-element numeric array

Minimum and maximum slider values, specified as a two-element numeric array. The first value must be less than the second value.

If you change `Limits` such that `Value` property is less than the new lower limit, MATLAB sets the `Value` property to the new lower limit. For example, suppose the `Limits` property is `[0 100]` and `Value` is 20. If the `Limits` changes to `[50 100]`, then MATLAB sets the `Value` property to 50.

Similarly, if you change `Limits` such that the `Value` property is greater than the new upper limit, MATLAB sets the `Value` property to the new upper limit.

`'MajorTicks'` — Major tick mark values

[0 20 40 60 80 100] (default) | 1-by-n numeric array

Major tick mark values, specified as a 1-by-n numeric array. Any array value that falls outside the `Limits` property value is not displayed. MATLAB removes duplicate array values.

Setting the `MajorTicks` property value sets the `MajorTicksMode` property value to `'manual'`.

`'MajorTickLabels'` — Labels on each major tick mark

`{'0','20','40','60','80','100'}` (default) | cell array of character vectors

Labels on each major tick mark, specified as a cell array of character vectors. MATLAB uses each element as the label for the major tick marks specified in the `MajorTicks` property.

Setting `MajorTickLabels` changes the `MajorTickLabelsMode` value to `'manual'`.

- If you specify more `MajorTickLabels` elements than `MajorTicks` elements, then MATLAB ignores the extra labels.
- If you specify fewer `MajorTickLabels` elements than `MajorTicks` elements, then MATLAB leaves the extra ticks unlabeled.

To create a blank label to a major tick, specify an empty character vector for that tick's corresponding `MajorTickLabels` element.

Example: `{'100','80','60','40','20','0'}`

Example: `{'Min','Max'}`

`'ValueChangedFcn'` — Code to execute when slider value changes

`''` (default) | function handle | cell array | character vector

Code to execute when slider value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the slider. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the slider. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of slider after app user's most recent interaction with it
`PreviousValue`	Value of slider before app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

This callback function does not execute if the slider value changes programmatically.

`'ValueChangingFcn'` — Code to execute as slider value changes
`''` (default) | function handle | cell array | character vector

Code to execute as the slider value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the slider. MATLAB passes this information in a `ValueChangingData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.Value` returns the current value of the slider. The `ValueChangingData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangingData` object.

Property	Value
`Value`	Current value of the slider as the app user is interacting with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanging'`

The `Value` property of the `Slider` object is not updated until the app user releases the slider thumb. Therefore, to get the value as the thumb is being moved, your code must get the `Value` property of the `ValueChangingData` object.

The `ValueChangingFcn` callback executes as follows:

- If the app user clicks the slider value once. then the callback executes a single time. For example, if the slider is on 1.0, and the app user single-clicks at 1.1, then the callback executes once.
- If the app user clicks and drags the slider to a new position, the callback executes repeatedly. For example, if the slider value is 1.0, and the app user clicks, holds, and drags the thump to value 10.0, then the callback executes multiple times until the app user releases the thumb.

When the `Value` property changes programmatically, the callback does not execute.

`'Position'` — Location and size of slider
`[100 100 150 3]` (default) | `[left bottom width height]`

Location and size of the slider excluding tick marks and labels, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the slider
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the slider
`width`	Distance between the right and left outer edges of the slider
`height`	Distance between the top and bottom outer edges of the slider

All measurements are in pixel units.

You cannot change the height of a slider when the `Orientation` property value is `'horizontal'`. Similarly, you cannot change the width of a slider when the `Orientation` property value is `'vertical'`.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 200 60 60]`

Examples

Create Slider in UI Figure Window

```
fig = uifigure;
sld = uislider(fig);
```

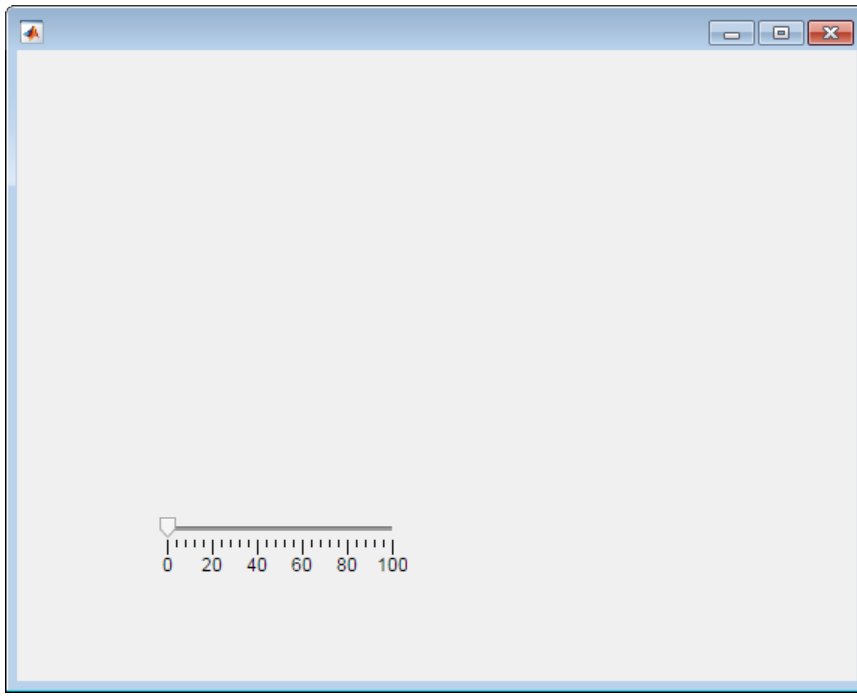

Create Slider in Panel

Create a uifigure window containing a panel. Create a slider and specify its position within the panel.

```
fig = uifigure;
pnl = uipanel(fig);
sld = uislider(pnl,'Position',[50 50 150 3]);
```

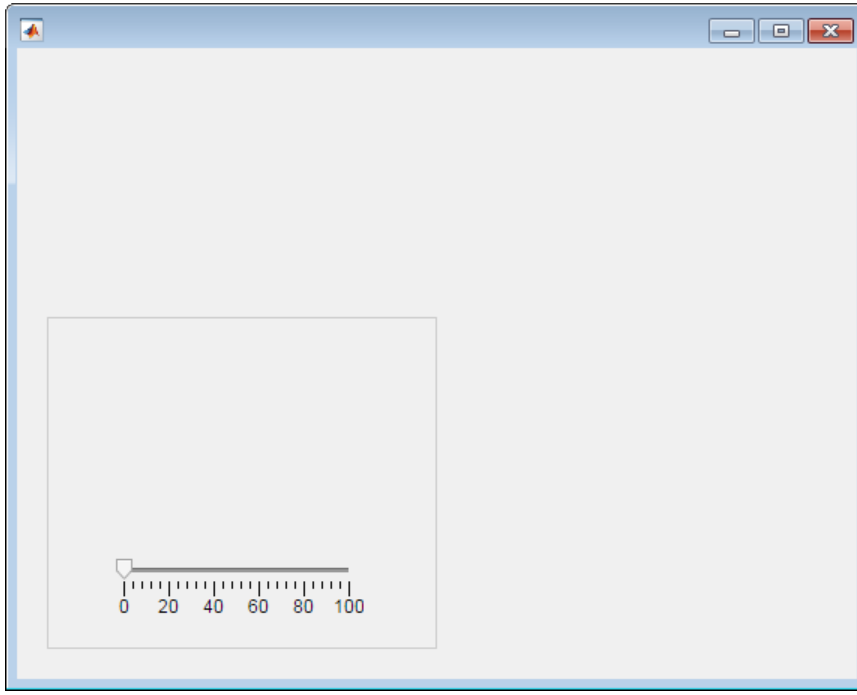

Set and Change Slider Property Values

Create a slider. Set the `Value` property to 50.

```
fig = uifigure;
sld = uislider(fig,'Value',50);
```

Determine the current slider limits.

```
limits = sld.Limits
```

```
limits =

     0   100
```

Change the slider limits and set the value to 35.

```
sld.Limits = [-50 50];
sld.Value = 35;
```

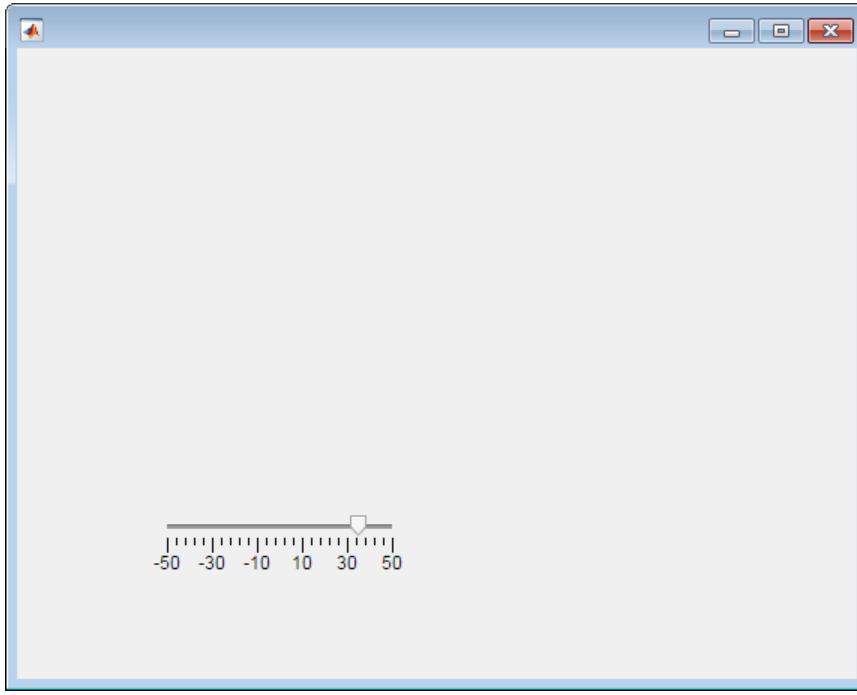

Code Response to Moved Slider Thumb

Create a slider and a gauge. When an app user moves the slider thumb and releases the mouse button, the needle of the gauge reflects the slider value.

Save the following code to `sliderValue.m` on your MATLAB path.

This code creates a window containing a slider and a gauge. When an app user moves the slider thumb, the `ValueChangedFcn` callback updates the gauge to reflect the slider value.

```
function slidervalue
% Create UI figure window and components

fig = uifigure('Position',[100 100 350 275]);

cg = uigauge(fig,'Position',[100 100 120 120]);

sld = uislider(fig,...
```

```
    'Position',[100 75 120 3],...
    'ValueChangedFcn',@(sld,event) updateGauge(sld,cg));

end

% Create ValueChangedFcn callback
function updateGauge(sld,cg)
cg.Value = sld.Value;
end
```

Run `sliderValue`, and then move the slider thumb. When you release the mouse button, the circular gauge needle moves to the matching value on the gauge.

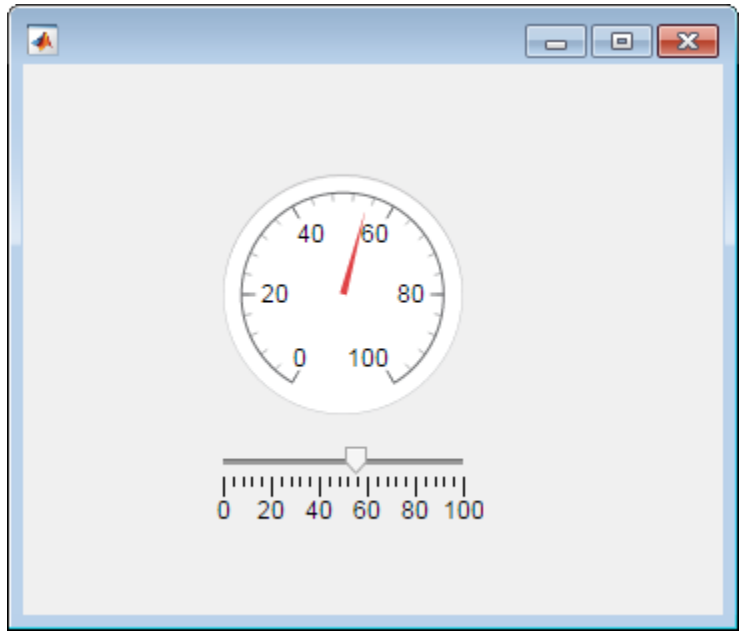

Code Response to Moving Slider

Create a slider and a gauge. As an app user moves the slider thumb, the needle of the gauge reflects the changing slider value

This code creates a window containing a slider and a gauge. As an app user moves the slider thumb, the `ValueChangingFcn` callback updates the gauge to reflect the slider value.

Save the following code to `sliderChanging.m` on your MATLAB path.

```
function sliderchanging
% Create UI figure window and components

fig = uifigure('Position',[100 100 350 275]);

cg = uigauge(fig,'Position',[100 100 120 120]);

sld = uislider(fig,...
               'Position',[100 75 120 3],...
               'ValueChangingFcn',@(sld,event) sliderMoving(event,cg));

end

% Create ValueChangingFcn callback
function sliderMoving(event,cg)
cg.Value = event.Value;
end
```

Run `sliderChanging`, and then move the slider. As you move the slider, the circular gauge needle moves, reflecting the slider value.

See Also

See Also

Functions

`appdesigner` | `uifigure`

Properties

Slider Properties

Introduced in R2016a

uispinner

(App Designer) Create spinner component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. Apps created with GUIDE or the `figure` function do not support spinner components.

Syntax

```
spn = uispinner
spn = uispinner(parent)
spn = uispinner( ___ ,Name,Value)
```

Description

`spn = uispinner` creates a spinner in a new UI figure window and returns the `Spinner` object.

`spn = uispinner(parent)` creates the spinner in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`spn = uispinner( ___ ,Name,Value)` specifies `Spinner` properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see Spinner Properties.

Example: `'Value',150` specifies that the number 50 appears in the spinner.

`'Value'` — Spinner value

0 (default) | double-precision number

Spinner value, specified as a double-precision number.

When the app user types a value in the spinner, the value is a character vector. When the app user presses the **Enter** key or changes focus, MATLAB converts the app-user-entered value to a double-precision number.

MATLAB rejects the value if:

- It cannot convert the character vector to a scalar number.
- The value is NaN, blank, or a complex number.
- The value is a mathematical expression, such as `1+2`.
- The value is less than or greater than the values specified by the `Limits` property.

When MATLAB rejects the app-user-entered value, a tooltip appears describing the value requirements. The spinner immediately reverts to its previous value and no `ValueChangedFcn` runs.

Example: 10

`'ValueDisplayFormat'` — Numeric display format

`'%11.4g'` (default) | character vector

Numeric display format, specified as a character vector.

MATLAB uses `sprintf(NumericDisplayFormat,Value)` to convert the value of the spinner to a character vector and displays it.

You can mix text with format operators. For example:

```
spin = uispinner('ValueDisplayFormat','%.0f MS/s');
```

The resulting spinner component looks like this:



When the app user clicks in the spinner field, the field shows the value without the text.

For a complete list of supported format operators, see `sprintf` in the MATLAB documentation.

Example: '%.0f MS/s'

`'RoundFractionalValues'` — Rounding of fractional values

`'off'` (default) | `'on'`

Rounding of fractional values entered by app users, specified as one of the following:

- `'on'` — MATLAB rounds the value if it results in a valid value and executes the `ValueChangedFcn` callback. If the resulting value is outside the lower or upper `Limits`, then MATLAB rounds to the nearest value that falls within the `Limits` and then executes the callback.
- `'off'` — MATLAB does not round a fractional value to a whole number.

If the `RoundFractionalValues` property value changes from `'off'` to `'on'` programmatically, then MATLAB applies these rules:

- If rounding the existing value yields an integer that lies inside the limit range specified by the `Limits` property, then MATLAB rounds up the existing value.
- If rounding the existing value yields an integer that is less than the lower limit, then MATLAB rounds up the existing value.
- If rounding the existing value yields an integer that is greater than the upper limit, then MATLAB rounds down the existing value.
- If the limits are configured such that there is no valid integer in the range, then MATLAB sets the `RoundFractionalValues` property value back to `'off'` and displays an error message.

`'Step'` — Quantity by which value is incremented or decremented

1 (default) | numeric scalar

Quantity by which the `Value` property increments or decrements when the app user presses the up and down arrows, respectively.

`'Limits'` — Minimum and maximum spinner values

[-Inf Inf] (default) | two-element numeric array

Minimum and maximum spinner values, specified as a two-element numeric array. The first value must be less than the second value. Set array elements to `-Inf` or `Inf` to specify no minimum or no maximum, respectively.

If you change `Limits` such that the `Value` property is outside the new limits, MATLAB sets the `Value` property to a value within the new limits. For example, suppose the `Limits` property is `[0 100]` and the `Value` property is 20. If the `Limits` property changes to `[50 100]`, then MATLAB sets the `Value` property to 50 (assuming the `LowerLimitInclusive` value is `'on'`.

Example: `[-Inf 200]`

Example: `[-100 Inf]`

Example: `[-100 200]`

`'LowerLimitInclusive'` — Lower limit inclusiveness

`'on'` (default) | `'off'`

Lower limit inclusiveness, specified as one of the following:

- `'on'` — Value must be equal to or greater than the lower limit.
- `'off'` — Value must be greater than the lower limit.

`'UpperLimitInclusive'` — Upper limit inclusiveness

`'on'` (default) | `'off'`

Upper limit inclusiveness, specified as one of the following:

- `'on'` — Value must be equal to or less than the upper limit.
- `'off'` — Value must be less than the upper limit.

For example, if you want the numeric input to be between 0 and 1, excluding 0 and 1, do all of the following:

- Set the `Limits` property value to `[0 1]`.
- Set the `UpperLimitInclusive` property to `'off'`.
- Set the `LowerLimitInclusive` property to `'off'`.

`'ValueChangedFcn'` — Code to execute when spinner value changes
`''` (default) | function handle | cell array | character vector

Code to execute when the spinner value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback executes when the app user changes focus or presses the **Enter** key after changing the spinner value. It does not matter whether the user changes the spinner value by typing or by using the up and down arrow buttons.

This callback function can access specific information about the user's interaction with the spinner. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the spinner. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of spinner after app user's most recent interaction with it
`PreviousValue`	Value of spinner before app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

This callback function does not execute if the spinner value changes programmatically.

`'ValueChangingFcn'` — Code to execute as spinner value changes

`''` (default) | function handle | cell array | character vector

Code to execute as the spinner value changes, specified as one of these values:

- Function handle
- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

This callback function can access specific information about the user's interaction with the spinner. MATLAB passes this information in a `ValueChangingData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.Value` returns the current value of the spinner. The `ValueChangingData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangingData` object.

Property	Value
`Value`	Current value of the spinner as the app user is interacting with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanging'`

The `Value` property of the `Spinner` is not updated until the app user releases the arrow key. Therefore, to get the values while the arrow key is being pressed, your code must get the `Value` property of the `ValueChangingData` object.

The callback executes as follows:

- If the app user clicks a spinner up or down arrow, the callback executes once. For example, suppose that the spinner value is 2, and the `Step` value is 1. If the app user clicks the up arrow, the callback executes.
- If the app user presses and holds a spinner up or down arrow, the callback executes repeatedly. For example, if the app user clicks and holds the up arrow, the callback executes multiple times until the app user releases the up arrow.

If the spinner `Value` property changes programmatically, then the callback does not execute.

`'Position'` — Location and size of spinner
`[100 100 100 22]` (default) | `[left bottom width height]`

Location and size of spinner relative to the parent container, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the spinner
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the spinner
`width`	Distance between the right and left outer edges of the spinner
`height`	Distance between the top and bottom outer edges of the spinner

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 22]`

Examples

Create Spinner in UI Figure Window

```
fig = uifigure
spn = uispinner(fig);
```

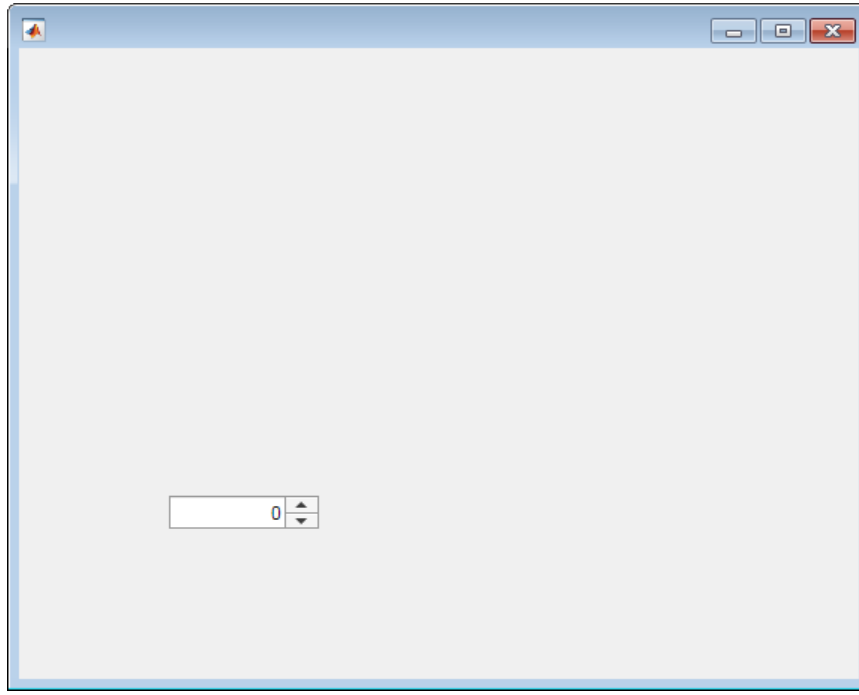

Create Spinner in Panel

Create a spinner in a panel.

```
fig = uifigure;
pnl = uipanel(fig);
spn = uispinner(pnl);
```

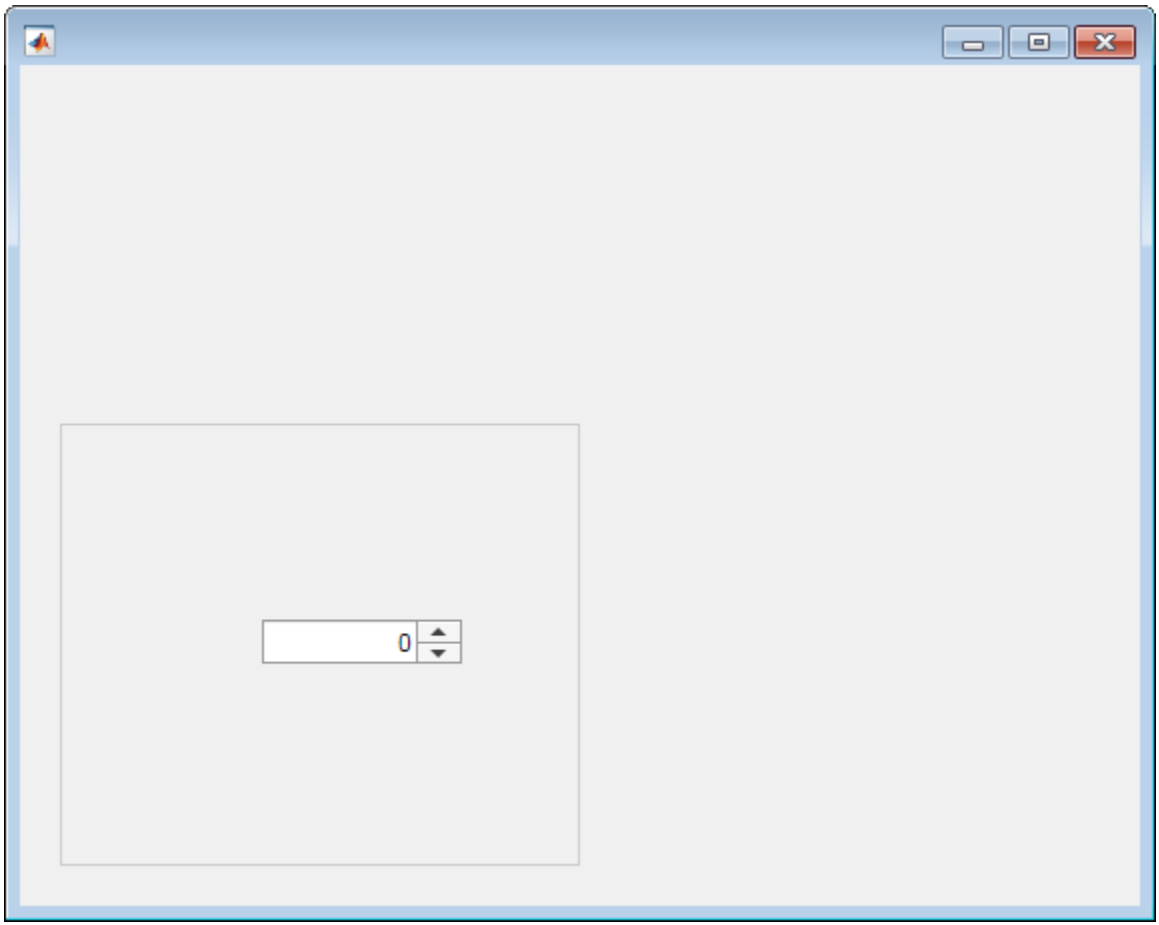

Set and Access Spinner Property Values

Create a spinner that limits the values the app user can enter to between 0 and 100, inclusive.

Create a spinner.

```
fig = uifigure;
spn = uispinner(fig);
```

Determine the limits. The returned values indicate that the lower and upper limits are unlimited.

```
limits = spn.Limits
```

```
limits =

  -Inf   Inf
```

Set the limits to 0 and 100.

```
spn.Limits = [0 100];
```

Create Spinner and Specify Limit Inclusiveness

Create a spinner that allows the app user to enter a value greater than -5 and less than or equal to 10.

```
fig = uifigure;
spn = uispinner(fig,'Limits', [-5  10],...
            'LowerLimitInclusive','off',...
            'UpperLimitInclusive','on',...
            'Value', 5);
```

Run the code. If you enter a value in the spinner that is outside the limits, MATLAB automatically displays a message indicating the problem. MATLAB then restores the value to the previous valid value.

Create Spinner That Displays Values Using Exactly Two Decimals

Create a spinner that allows the app user to enter any value, but always displays the value using exactly two decimals. Be aware that MATLAB stores the exact value that the app user enters.

```
fig = uifigure;
spn = uispinner(fig,'ValueDisplayFormat', '%.2f');
```

Run the code, and then enter 5.555 in the spinner. Click outside the spinner. The spinner displays 5.55.

MATLAB stores the original value, 5.555.

Click in the spinner, it displays the value originally typed.

Code Response to Changed Spinner Value

Create a spinner and a slider. When an app user changes the spinner value, the slider updates to match that value.

Save the following code to `spinnerValue.m` on your MATLAB path. This code creates a UI figure window containing a slider and a spinner. When an app user changes the spinner value, the `ValueChangedFcn` updates the spinner to reflect the slider value.

```
function spinnervalue
% Create UI figure window and components
fig = uifigure('Position',[100 100 350 275]);

% Create a slider
sld = uislider(fig,...
    'Position',[90 220 120 3]);

% Create a spinner
spn = uispinner(fig,...
    'Position',[100 140 100 22],...
    'ValueChangedFcn',@(spn,event) updateSlider(spn,sld));
end

% Create ValueChangedFcn callback
function updateSlider(spn,sld)
sld.Value = spn.Value;
end
```

Run `spinnerValue`.

Click and hold the up arrow in the spinner until the value reaches 24, and then release. The slider thumb moves to indicate the spinner value.

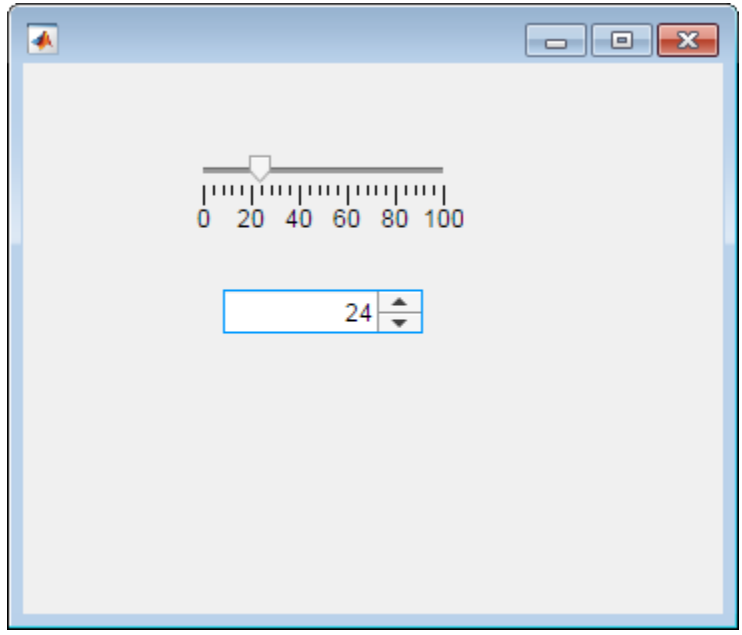

Code Response to Changing Spinner Value

Create a spinner and a slider. As an app user changes the spinner value, the slider repeatedly updates to match that value.

Save the following code to `showChangingValue.m` on your MATLAB path. This code creates a UI figure window containing a slider and a spinner. As an app user changes the spinner value, the `ValueChangingFcn` repeatedly updates the slider to reflect the spinner value as it changes.

```
function showChangingValue
% Create UI figure window and components
fig = uifigure('Position',[100 100 350 275]);
sld = uislider(fig,...
    'Position',[90 220 120 3]);

spn = uispinner(fig,...
    'Position',[100 140 100 22],...
    'ValueChangingFcn',@(spn,event) spinnerChanging(event,sld));
end
```

```
% Create ValueChangingFcn callback
function spinnerChanging(event,sld)
sld.Value = event.Value;
end
```

Run `showChangingValue`.

Click, and hold the up arrow in the spinner until the value reaches 24, and then release. The slider moves as the spinner value changes.

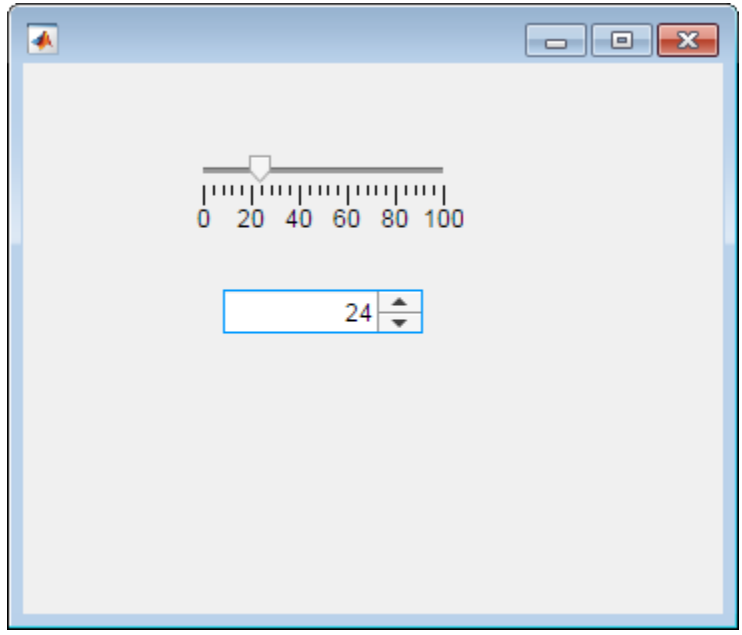

Code Response to Calculate Changed Spinner Value

Code the `ValueChangedFcn` callback to determine if the value is rising or falling compared to the previous spinner value. Set lamp color to green when the value is increasing and to red when the value is decreasing

Save the following code to `upOrDown.m` on your MATLAB path.

```
function upOrDown
% Create UI figure window
```

```
fig = uifigure(...
    'Position',[100 100 189 171]);

% Create Lamp
lmp = uilamp(fig,...
    'Position',[90 50 20 20],...
    'Color','green');

% Create Spinner
spn = uispinner(fig,...
    'Position',[50 100 100 22],...
    'ValueChangedFcn',@(spn,event) spinnerValueChanged(event,lmp));
end

% Create ValueChangedFcn that uses event data
function spinnerValueChanged(event,lmp)
newValue = event.Value;
previousValue = event.PreviousValue;
difference = newValue-previousValue;
if difference > 0
    lmp.Color = 'green';
else
    lmp.Color = 'red';
end
end
```

Run `upOrDown`.

Each time you change the spinner value, the `ValueChangedFcn` determines whether the value is increasing or decreasing and sets the lamp color accordingly.

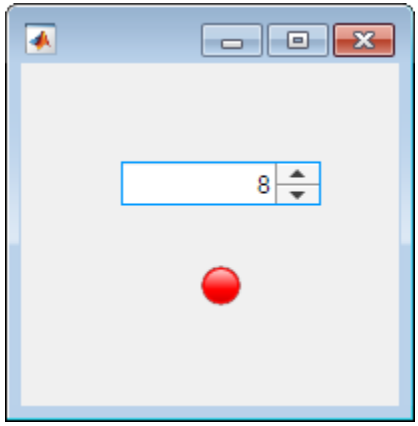

See Also

See Also

Functions
`appdesigner` | `uifigure`

Properties
Spinner Properties

Introduced in R2016a

uiswitch

(App Designer) Create slider switch, rocker switch, or toggle switch component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. Apps created with GUIDE or the `figure` function do not support slider switches, rocker switches, or toggle switches.

Syntax

```
sw = uiswitch
sw = uiswitch(style)
sw = uiswitch(parent)
sw = uiswitch(parent,style)
sw = uiswitch( ___ ,Name,Value)
```

Description

`sw = uiswitch` creates a slider switch component in a new UI figure window and returns the `Switch` object.

`sw = uiswitch(style)` creates a switch of the specified style.

`sw = uiswitch(parent)` creates the switch in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`sw = uiswitch(parent,style)` creates a switch of the specified style in the specified parent container.

`sw = uiswitch( ___ ,Name,Value)` specifies object properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`style` — Type of switch

`'slider'` (default) | `'rocker'` | `'toggle'`

Type of switch, specified as one of the following styles:

Style	Default Visual
`'slider'`	
`'rocker'`	
`'toggle'`	

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Example: `'Text',{'0','1'}` specifies the two switch states are “0” and “1”.

Each type of switch supports a different set of properties. For a full list of properties and descriptions for each type, see the associated property page.

- Switch Properties
- RockerSwitch Properties
- ToggleSwitch Properties

Examples

Create Slider Switch in UI Figure Window

```
fig = uifigure;
sliderswitch = uiswitch(fig);
```

Create Toggle Switch in UI Figure Widow

```
fig = uifigure;
toggleswitch = uiswitch(fig,'toggle');
```

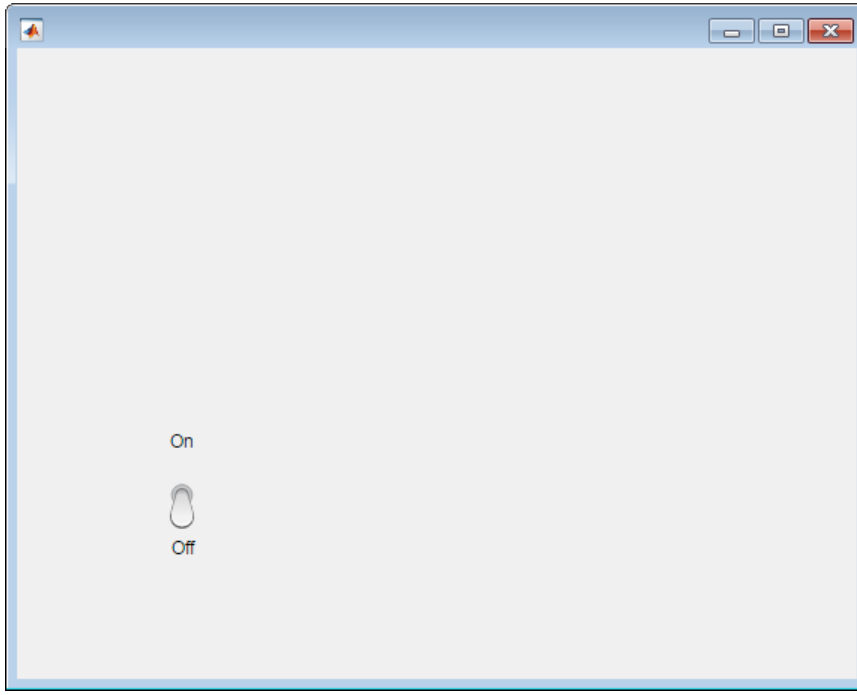

Create a Rocker Switch in a Panel

Create a rocker switch in a panel.

```
fig = uifigure;
pnl = uipanel(fig);
rockerswitch = uiswitch(pnl,'rocker');
```

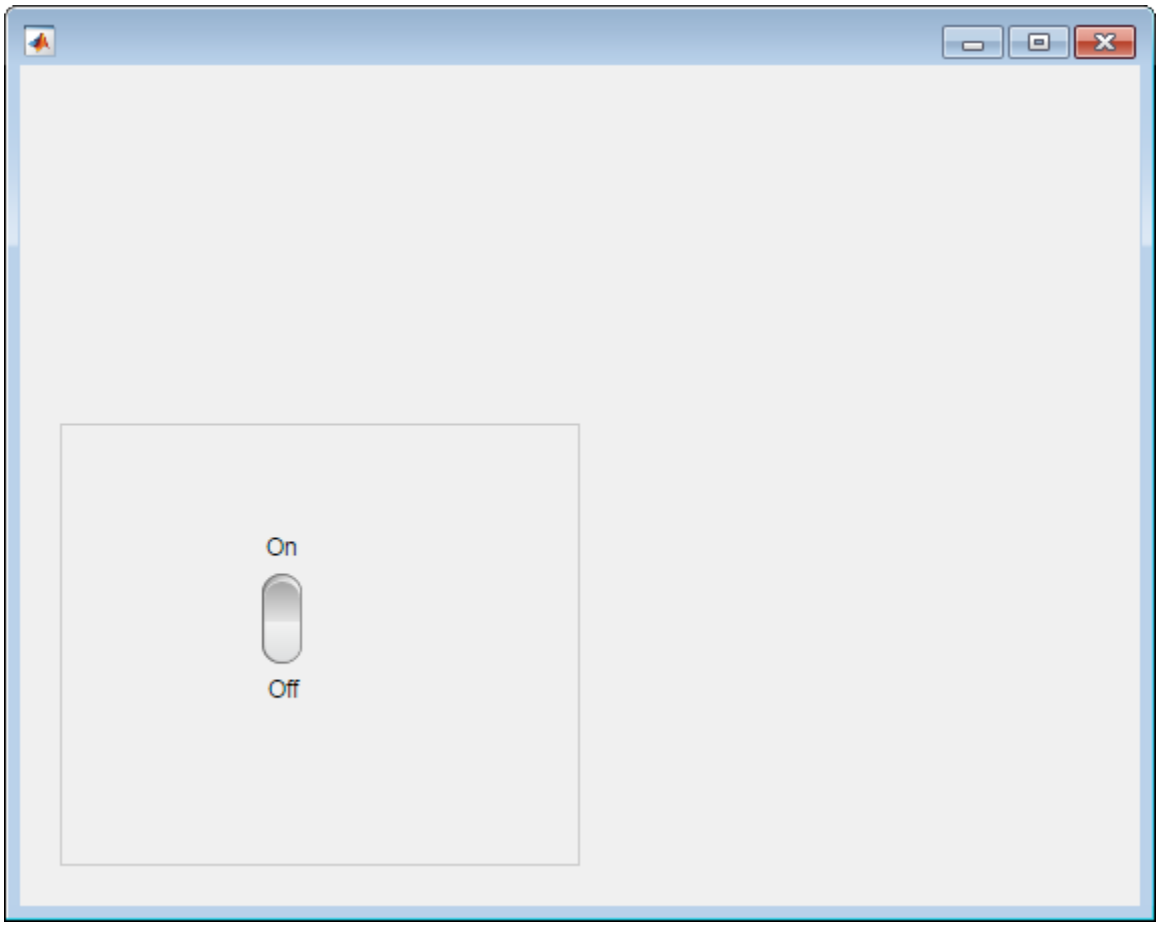

Set and Access Switch Property Values

Create a rocker switch.

```
fig = uifigure;
rockerswitch = uiswitch(fig,'rocker');
```

Change the switch text.

```
rockerswitch.Items = {'Stop','Start'};
```

Determine the current switch value.

```
val = rockerswitch.Value
```

```
val =

Stop
```

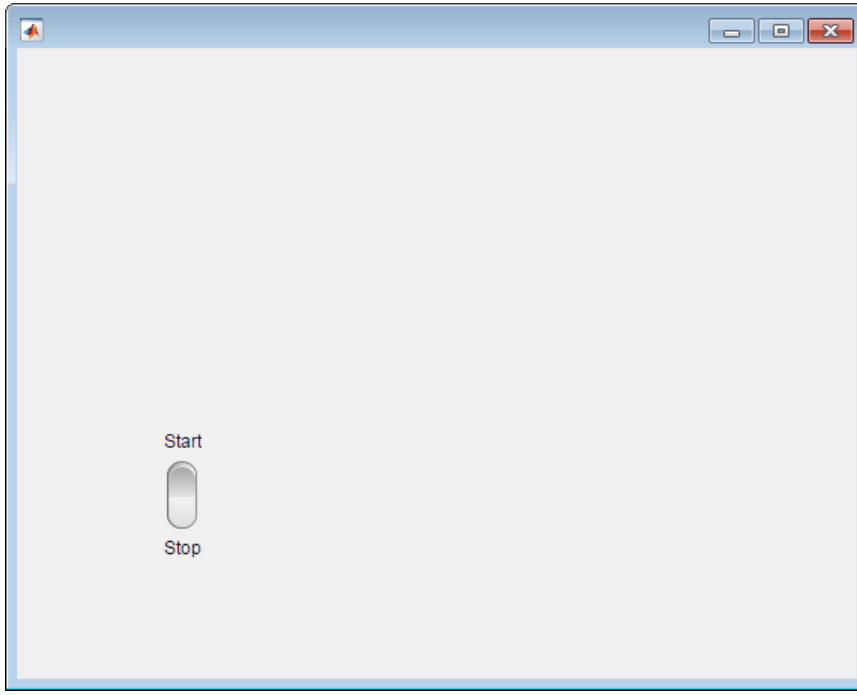

Switch That Changes Lamp Color

Save the following code as `lampswitch.m` on your MATLAB path. This code creates an app containing a lamp and a rocker switch. When the user flips the switch, the `ValueChangedFcn` callback changes the lamp color.

```
function lampswitch
fig = uifigure('Position',[100 100 350 275]);

% Create lamp
lmp = uilamp(fig,...
    'Position',[165 75 20 20],...
```

```
    'Color','green');

% Create switch
uiswitch(fig,'toggle',...
    'Items',{'Go','Stop'},...
    'Position',[165 160 20 45],...
    'ValueChangedFcn',@switchMoved);

% ValueChangedFcn callback
function switchMoved(src,event)
    switch src.Value
        case 'Go'
            lmp.Color = 'green';
        case 'Stop'
            lmp.Color = 'red';
        end
    end
end
```

Run `lampswitch`, and click the switch to see the color change.

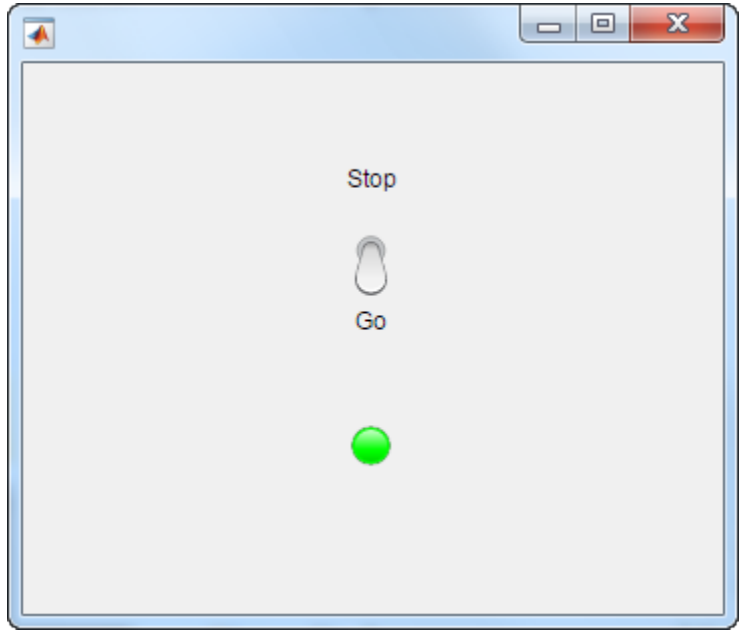

See Also

See Also

Functions
`appdesigner` | `uifigure`

Properties
RockerSwitch Properties | Switch Properties | ToggleSwitch Properties

Introduced in R2016a

uitextarea

(App Designer) Create text area component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create a text area using `uicontrol`.

Syntax

```
txa = uitextarea
txa = uitextarea(parent)
txa = uitextarea( ___ ,Name,Value)
```

Description

`txa = uitextarea` creates a text area in a new UI figure window and returns the `TextArea` object.

`txa = uitextarea(parent)` creates the text area in the specified parent container. The parent container can be a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

`txa = uitextarea( ___ ,Name,Value)` specifies `TextArea` properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`parent` — Parent object

`Figure` object (default) | `Panel` object | `Tab` object | `ButtonGroup` object

Parent object, specified as a `Figure` created using the `uifigure` function, or one of its child containers: `Tab`, `Panel`, or `ButtonGroup`.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see .TextArea Properties.

Example: `'Editable','off'` specifies that the app user cannot change the text area text.

`'Value'` — Text in text area

`{''}` (default) | cell array of character vectors

Text in text area, specified as a cell array of character vectors. MATLAB can properly render formatted text, such as this:

```
cellArrayText{1} = sprintf('%s\n%s', 'Line 1', 'Line 2')
cellArrayText{2} = sprintf('%s\n%s', 'Line 3', 'Line 4')
textarea = uitextarea('Value',cellArrayText);
```

If a row of text in the cell array does not fit into the width of the text area, MATLAB wraps the text.

If there are too many rows to display in the text area size, MATLAB adds a scroll bar.

Example: {'Joseph Welford'; 'Mary Reilly'; 'Roberta Silberlicht'}

`'ValueChangedFcn'` — Code to execute after text update

`''` (default) | function handle | cell array | character vector

Code to execute after the text update, specified as one of these values:

- Function handle

- Cell array containing a function handle and additional arguments
- Character vector that is a valid MATLAB expression, which is evaluated in the base workspace.

The callback executes when the app user changes the text and either presses **Tab** or clicks outside the text area.

This callback function can access specific information about the user's interaction with the text area. MATLAB passes this information in a `ValueChangedData` object as the second argument to your callback function. In App Designer, the argument is called `event`. You can query the object properties using dot notation. For example, `event.PreviousValue` returns the previous value of the text area. The `ValueChangedData` object is not available to callback functions specified as character vectors.

The following table lists the properties of the `ValueChangedData` object.

Property	Value
`Value`	Value of text area after app user's most recent interaction with it
`PreviousValue`	Value of text area before app user's most recent interaction with it
`Source`	Component that executes the callback
`EventName`	`'ValueChanged'`

The `ValueChangedFcn` callback does not execute if the text area value changes programmatically.

`'Position'` — Location and size of text area
`[100 100 150 60]` (default) | `[left bottom width height]`

Location and size of the text area relative to the parent, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the parent container to the outer left edge of the text area

Element	Description
`bottom`	Distance from the inner bottom edge of the parent container to the outer bottom edge of the text area
`width`	Distance between the right and left outer edges of the text area
`height`	Distance between the top and bottom outer edges of the text area

All measurements are in pixel units.

Note: The `Position` values are relative to the *drawable area* of the parent container (such as a `Figure` created with the `uifigure` function or one of its child containers). The drawable area is the area inside the borders of the container and does not include the area occupied by the container's title.

Example: `[100 100 100 90]`

Examples

Create Text Area in UI Figure Window

```
fig = uifigure;
txa = uitextarea(fig);
```

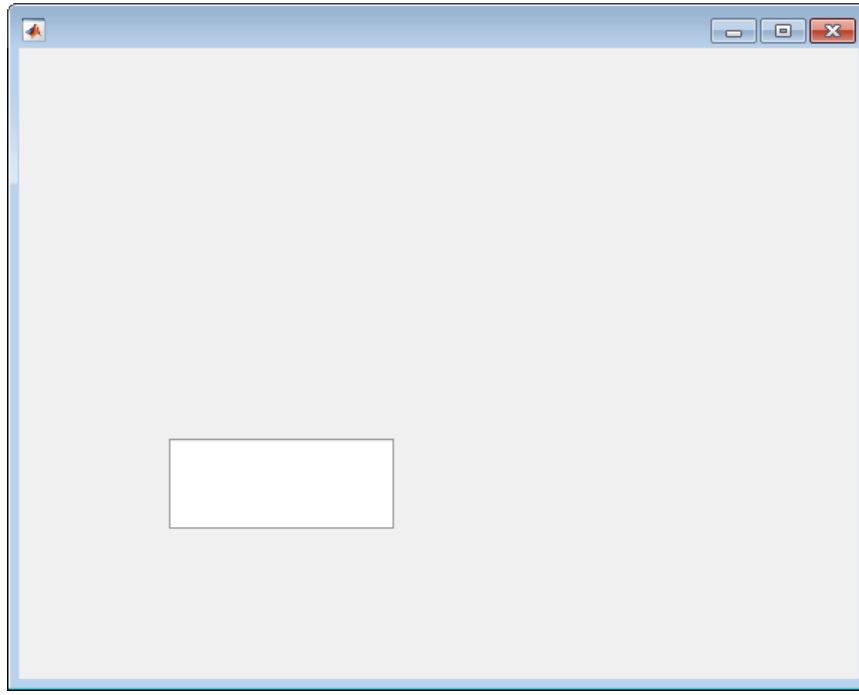

Set and Access Text Area Properties

Create a populated text area.

```
fig = uifigure;
txa = uitextarea(fig,...
                 'Value', {'First Name Last Name';...
                 'Address 1'; 'Address 2';'City, State'; 'Postal Code'});
```

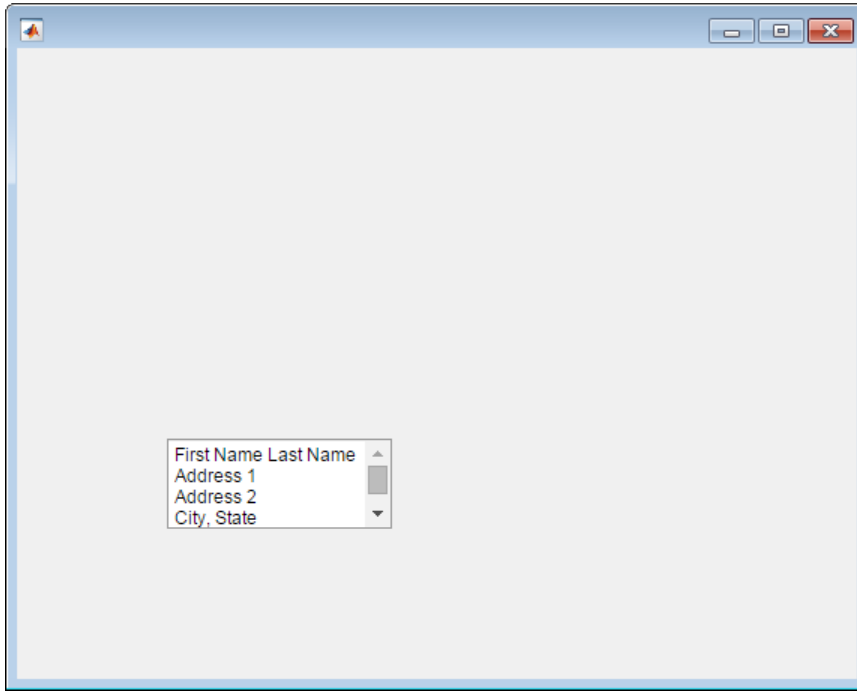

Notice that the text area includes a scroll bar so that the app user can view the postal code.

Determine the current size of the text area.

```
size = txa.Position(3:4)
```

```
size =

   150    60
```

Increase the text area size so that the postal code displays without the use of a scroll bar.

```
txa.Position(3:4) = [155 75];
```

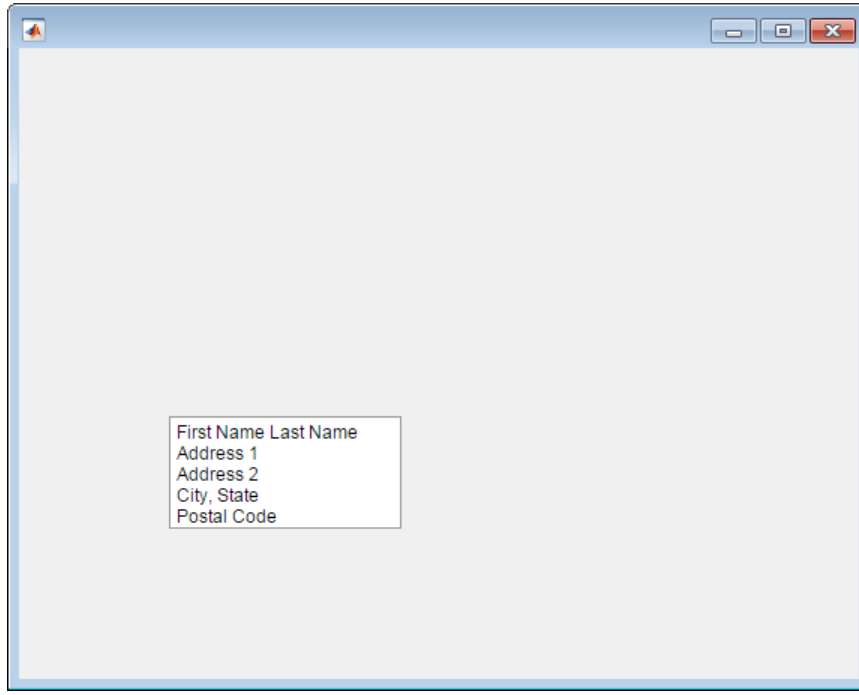

Code Response to Changed Text Area Value

Create a text area and two labels. When an app user types text and clicks outside the text area, a label thanks the app user for the input. If the app user removes the text and clicks outside the text area, the thank you text is removed.

Save the following code to `comments.m` on your MATLAB path. This code creates a UI figure window containing two labels and a text area. When an app user types text and clicks outside the text area, the `ValueChangedFcn` callback updates one of the labels to thank the user.

```
function comments
% Create UI figure window and components

fig = uifigure('Position',[100 100 429 276]);

label1 = uilabel(fig,...
    'Position',[100 164 100 15],...
    'Text','Enter Comments:');
```

```
label2 = uilabel(fig,...
    'Position',[100 75 175 15],...
    'Text','');

textarea = uitextarea(fig,...
    'Position',[100 100 150 60],...
    'ValueChangedFcn',@(textarea,event) textEntered(textarea, label2));

% Create ValueChangedFcn callback
    function textEntered(textarea,label2)
        val = textarea.Value;
        label2.Text = '';
        % Check each element of text area cell array for text
        for k = 1:length(val)
            if(~isempty(val{k}))
                label2.Text = 'Thank you for your comments!';
                break;
            end
        end
    end
end
```

Run `comments`, and type text in the text area field. Click outside the text area to trigger the callback.

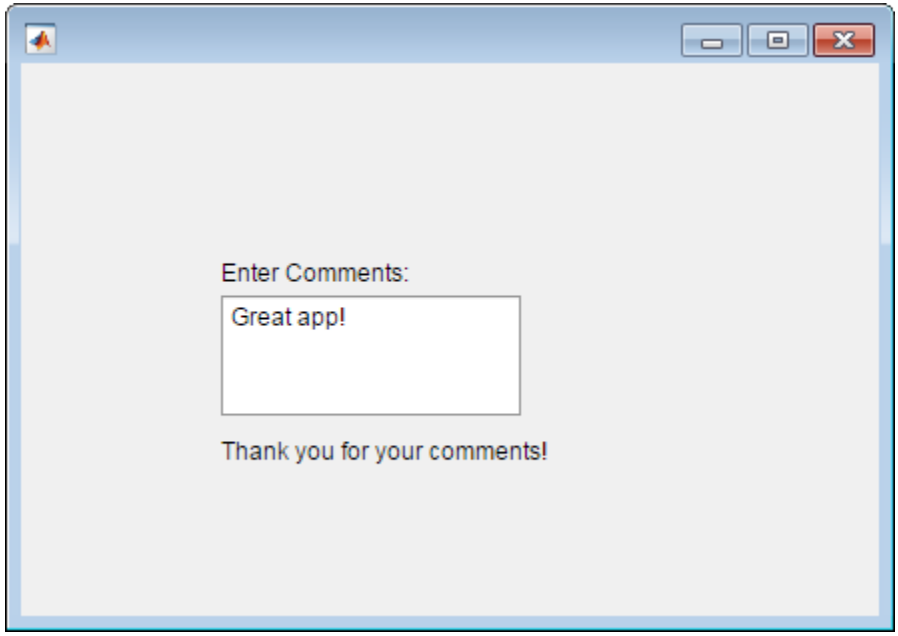

See Also

See Also

Functions
`appdesigner` | `uifigure`

Properties
TextArea Properties

Introduced in R2016a

uitogglebutton

(App Designer) Create toggle button component

Compatibility

Use only with App Designer or figures created with the `uifigure` function. When using GUIDE or the `figure` function, create a radio button using `uicontrol`.

Syntax

```
tb = uitogglebutton
tb = uitogglebutton(parent)
tb = uitogglebutton( ___ ,Name,Value)
```

Description

`tb = uitogglebutton` creates a toggle button within a button group in a UI figure and returns the `ToggleButton` object.

`tb = uitogglebutton(parent)` creates the toggle button within the specified button group. The button group must be child of a `Figure` created with the `uifigure` function.

`tb = uitogglebutton( ___ ,Name,Value)` specifies `ToggleButton` properties using one or more `Name,Value` pair arguments. Use this option with any of the input argument combinations in the previous syntaxes.

Input Arguments

`parent` — Parent container
`ButtonGroup` object

Parent container, specified as a `ButtonGroup` object. The parent must be a `ButtonGroup` object within a `Figure` created using the `uifigure` function.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

The properties listed here are a subset of the available properties. For the full list, see ToggleButton Properties.

Example: `'Text', 'French'` specifies that the text "French" displays on the toggle button.

`'Value'` — State of toggle button

`1` | `0`

State of the toggle button specified as `0` (unpressed) or `1` (depressed). Within a given button group, only one toggle button can be selected (depressed) at a time. When the `Value` property is set to `1`, the toggle button appears depressed. The state of the first button added to a button group is `1`, by default. Subsequent buttons added to the same button group have a default state of `0`.

When the `Value` property of a `ToggleButton` changes to `1`, the `Value` property of the previously selected `ToggleButton` changes to `0`. In addition, the `SelectedObject` property value of the `ButtonGroup` is updated.

If you programmatically change the `Value` property of a `ToggleButton` to `0`, MATLAB sets the `Value` property of the first `ToggleButton` *added* to the `ButtonGroup` to `1`. If the first `ToggleButton` added is the one for which you programmatically set the `Value` property to `0`, then MATLAB sets the `Value` property for the `ToggleButton` added to the `ButtonGroup` to `1`.

Note: The first `ToggleButton` *added* to a `ButtonGroup` is not necessarily the first `ToggleButton` *listed* in the `Children` property of the `ButtonGroup`.

`'Text'` — Text for toggle button

`'Toggle Button'` (default) | character vector | cell array of character vectors

Text for toggle button, specified as a character vector or a cell array of character vectors.

Example: `'Steady state'`

Example: `{'Steady','state'}`

`'Icon'` — File name of button icon

`''` (default) | character vector

File name of the button icon, specified as a character vector.

The file name can be an image file name on the MATLAB path or a full path to an image file. If you plan to share an app with others, put the image file on the MATLAB path to facilitate app packaging.

The image file type must be JPEG, GIF, or PNG.

- If the button text takes up all the space specified by the `Position` property value, then MATLAB does not display the icon.
- If some room is available for the icon, then MATLAB scales down the image to fit, if necessary.

Example: `'icon.png'`

Example: `'C:\Documents\icon.png'`

`'Position'` — Location and size of button

`[10 40 100 22]` (default) | `[left bottom width height]`

Location and size of the button relative to the button group containing it, specified as the vector `[left bottom width height]`. This table describes each element in the vector.

Element	Description
`left`	Distance from the inner left edge of the button group to the outer left edge of the button
`bottom`	Distance from the inner bottom edge of the button group to the outer bottom edge of the button
`width`	Distance between the right and left outer edges of the button
`height`	Distance between the top and bottom outer edges of the button

All measurements are in pixel units.

Example: `[100 100 100 22]`

Examples

Create Toggle Buttons, Set and Access Property Values

Create toggle buttons by first creating a UI figure window and a button group to contain the buttons.

```
fig = uifigure('Position',[680 678 398 271]);
bg = uibuttongroup(fig,'Position',[137 113 123 85]);
```

Create three toggle buttons and specify the location of each.

```
tb1 = uitogglebutton(bg,'Position',[10 50 100 22]);
tb2 = uitogglebutton(bg,'Position',[10 28 100 22]);
tb3 = uitogglebutton(bg,'Position',[10 6 100 22]);
```

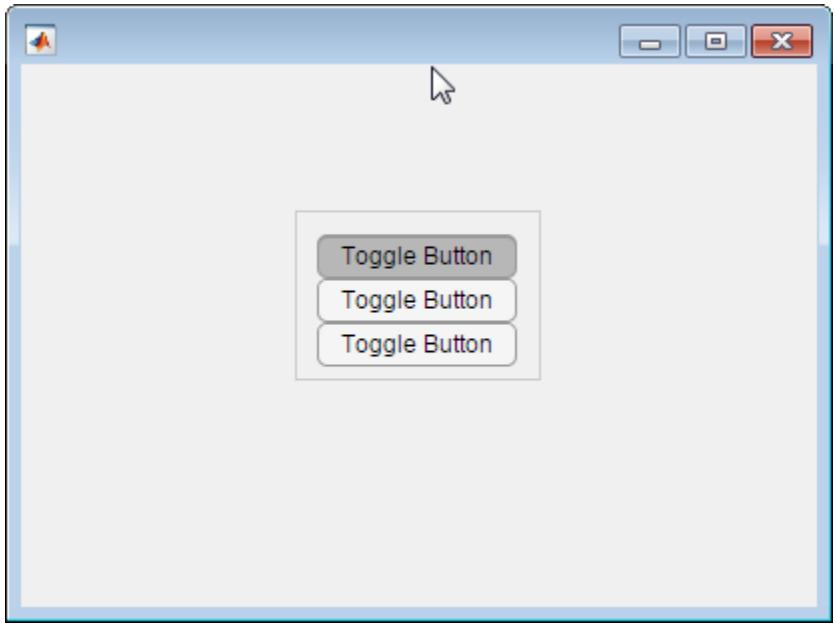

Change the text associated with each toggle button.

```
tb1.Text = 'English';
tb2.Text = 'French';
tb3.Text = 'German';
```

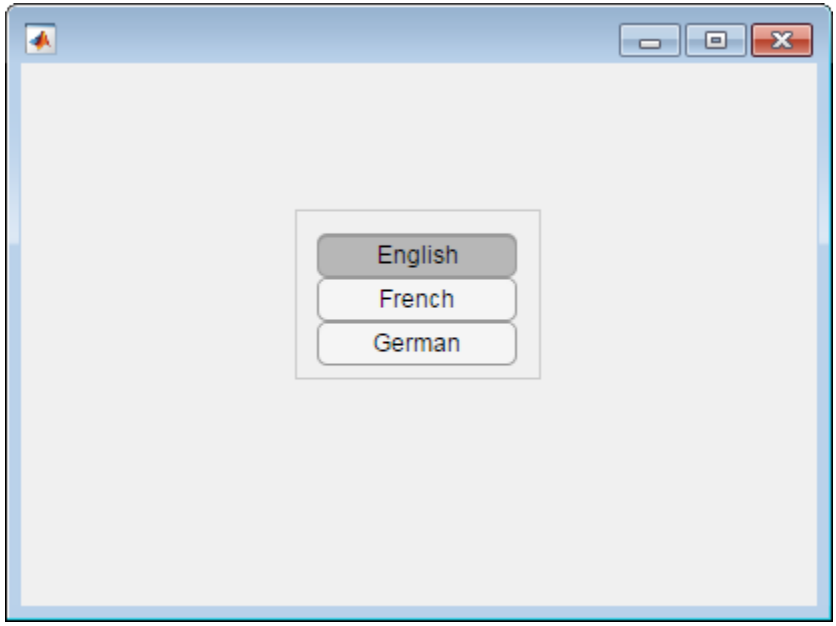

Change the toggle button selection to German programmatically.

```
tb3.Value = true;
```

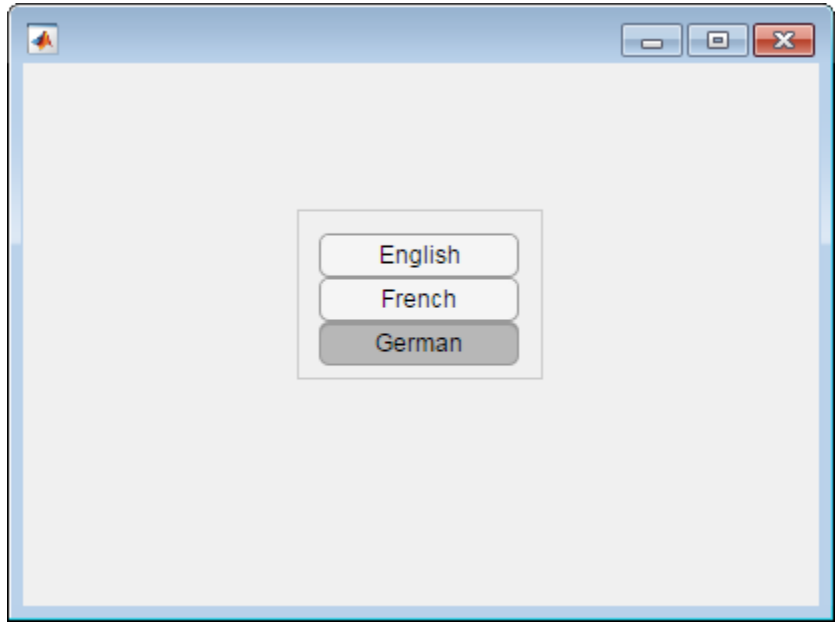

Determine the font name of the German toggle button text.

```
font = tb3.FontName
```

```
font =

Helvetica
```

Tips

- Button groups can contain any UI component type, but can only manage the selection of radio buttons and toggle buttons.
- To make your program respond when the app user selects a radio button or toggle button that is inside a button group. define a `SelectionChangedFcn` callback function for the `ButtonGroup` object. You cannot define callbacks for the individual buttons.
- To determine which radio button or toggle button is selected, query the `SelectedObject` property of the `ButtonGroup` object. You can execute this query anywhere in your code.

- If you set the `Visible` property of a `ButtonGroup` object to `'off'`, then any child objects it contains become invisible along with the parent `ButtonGroup`. However, the `Visible` *property value* of each child object remains unaffected.

See Also

See Also

Functions

`appdesigner` | `uibuttongroup` | `uifigure`

Properties

ToggleButton Properties

Introduced in R2016a

matlab.System class

Package: matlab

Base class for System objects

Description

`matlab.System` is the base class for System objects. In your class definition file, you must subclass your object from this base class (or from another class that derives from this base class). Subclassing allows you to use the implementation and service methods provided by this base class to build your object. Type this syntax as the first line of your class definition file to directly inherit from the `matlab.System` base class, where `ObjectName` is the name of your object:

```
classdef ObjectName < matlab.System
```

Note: You must set `Access = protected` for each `matlab.System` method you use in your code.

Methods

allowModelReferenceDiscreteSampleTimeInheritanceImpl	Model reference sample time inheritance status for discrete sample times
getDiscreteStateImpl	Discrete state property values
getGlobalNamesImpl	Global variable names for MATLAB System block
getHeaderImpl	Header for System object display
getInputNamesImpl	Names of System block input ports
getNumInputsImpl	Number of inputs to the System object
getNumOutputsImpl	Number of outputs from System object
getOutputNamesImpl	Names of System block output ports
getPropertyGroupsImpl	Property groups for System object display

getSimulateUsingImpl	Specify value for Simulate using parameter
infoImpl	Information about System object
isInactivePropertyImpl	Inactive property status
isInputSizeLockedImpl	Locked input size status
loadObjectImpl	Load System object from MAT file
processTunedPropertiesImpl	Action when tunable properties change
releaseImpl	Release resources
resetImpl	Reset System object states
saveObjectImpl	Save System object in MAT file
setProperties	Set property values using name-value pairs
setupImpl	Initialize System object
showFiSettingsImpl	Fixed point data type tab visibility for System objects
showSimulateUsingImpl	Simulate Using visibility
stepImpl	System output and state update equations
supportsMultipleInstanceImpl	Support System object in Simulink For Each subsystem
validateInputsImpl	Validate inputs to System object
validatePropertiesImpl	Validate property values

Attributes

In addition to the attributes available for MATLAB objects, you can apply the following attributes to any property of a custom System object™.

`Nontunable`	After an object is locked (after it is called or `setup` has been called), use `Nontunable` to prevent a user from changing that property value. By default, all properties are tunable. The `Nontunable` attribute is useful to lock a property that has side effects when changed. This attribute is also useful for locking a property value assumed to be constant during processing. You should always specify properties that affect the number of input or output ports as `Nontunable`.

`Logical`	Use `Logical` to limit the property value to a logical, scalar value. Any scalar value that can be converted to a logical is also valid, such as 0 or 1.
`PositiveInteger`	Use `PositiveInteger` to limit the property value to a positive integer value.
`DiscreteState`	Use `DiscreteState` to mark a property so it will display its state value when you use the `getDiscreteState` method.

To learn more about attributes, see "Property Attributes".

Examples

Create a Basic System Object

Create a simple System object, `AddOne`, which subclasses from `matlab.System`. You place this code into a MATLAB file, `AddOne.m`.

```
classdef AddOne < matlab.System
% ADDONE Compute an output value that increments the input by one

    methods (Access = protected)
       % stepImpl method is called when the object is called.
       function y = stepImpl(~,x)
          y = x + 1;
       end
    end
end
```

Use this object by creating an instance of `AddOne`, providing an input, and running the object.

```
hAdder = AddOne;
x = 1;
hAdder(x);
```

Assign the `Nontunable` attribute to the `InitialValue` property, which you define in your class definition file.

```
properties (Nontunable)
   InitialValue
```

end

See Also

See Also

matlab.system.StringSet | matlab.system.mixin.FiniteSource | matlab.system.mixin.Nondirect | matlab.system.mixin.Propagates | matlab.system.mixin.CustomIcon | matlab.system.Display.Action | matlab.system.Display.Header | matlab.system.Display.Section | matlab.system.Display.SectionGroup

Topics

"Object-Oriented Programming"
Class Attributes
Property Attributes
"Method Attributes"
"Define Basic System Objects"
"Define Property Attributes"

matlab.System Constructor

Construct System object with `Name,Value` pairs or value-only inputs

Syntax

```
function obj = ObjectName(varargin)
```

Description

`function obj = ObjectName(varargin)` constructs an *`ObjectName`* System object and sets properties from name-value pair inputs.

The System object constructor is a public method in the class file. The method name matches the class name. When you create a System object, the constructor is called to initialize properties to nondefault values. The constructor returns a new System object.

Constructor Body

Inside the constructor, call setProperties using one of the syntaxes in the table.

Input Arguments	Constructor Body	Example
`Name,Value` pairs	`setProperties(obj, nargin, varargin{:})`	"Constructor for Name-Value Pairs" on page 1-13468
`Name,Value` pairs and value-only arguments	`setProperties(obj, nargin, varargin{:}, 'Prop1', ..., 'PropN')`	"Constructor for Value-Only Property" on page 1-13468

When you call the System object, properties are specified as comma-separated pairs of `Name,Value` arguments or, if specified, `Value`-only arguments. `Name` is the property name and `Value` is the corresponding value. You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Value-only arguments are useful for properties that are frequently set to nondefault values. For example, System objects that read a file often require the file name property to be reset.

Tip: Within the body of the constructor, do not assign property values. This practice can cause problems if you use the System object in multiple environments (such as in a System block, in a MATLAB script, and in generated code). Instead, use default property values or change values inside setupImpl.

Examples

Constructor for Name-Value Pairs

Define a System object constructor that allows name-value pair input arguments.

Define a constructor for name-value pair inputs.

```
function obj = Counter(varargin)
    % Support name-value pair arguments when constructing object
    setProperties(obj,nargin,varargin{:})
end
```

With this constructor body, create a `Counter` object using name-value pairs.

```
myObj = Counter('StartValue',0,'UseIncrement',true);
```

Constructor for Value-Only Property

Define a System object constructor with a value-only input property.

Define a constructor with `'StartValue'` as a value-only property input. This constructor also allows name-value inputs.

```
function obj = Counter(varargin)
    % Support value-only argument for StartValue when instantiating
    setProperties(obj,nargin,varargin{:},'StartValue');
end
```

With this constructor body, create a `Counter` object using a value-only argument for `StartValue` and name-value pairs for other properties.

```
myObj = Counter(0,'UseIncrement',true);
```

See Also

See Also

`matlab.System.setProperties` | `matlab.System.setupImpl` | `nargin` | `varargin`

Introduced in R2010a

allowModelReferenceDiscreteSampleTimeInheritanceImpl

Class: matlab.System
Package: matlab

Model reference sample time inheritance status for discrete sample times

Syntax

```
flag = allowModelReferenceDiscreteSampleTimeInheritanceImpl(obj)
```

Description

`flag = allowModelReferenceDiscreteSampleTimeInheritanceImpl(obj)` specifies whether a System object in a reference model is allowed to inherit the sample time of the parent model. Use this method only for System objects that use discrete sample time and are intended for inclusion in Simulink via the MATLAB System block.

During model compilation, Simulink sets the model reference sample time inheritance before the System object `setupImpl` method is called.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object handle

Output Arguments

`flag`

Flag indicating whether model reference discrete sample time inheritance is allowed for the MATLAB System block containing the System object, returned as a logical value.

The default value for this argument depends on the number of inputs to the System object. To use the default value, you do not need to include this method in your System object class definition file.

Number of System object Inputs	Default Value and Override Effects
No inputs	**Default:** `false` — Model reference discrete sample time inheritance is not allowed. If your System object uses discrete sample time in its algorithm, override the default by returning `true` from `allowModelReferenceDiscreteSampleTimeInheritanceImpl`.
One or more inputs	**Default:** `true` — If no other Simulink constraint prevents it, model reference sample time inheritance is allowed. If your System object does not use sample time in its algorithm, override the default by returning `false` from `allowModelReferenceDiscreteSampleTimeInheritanceImpl`.

Examples

Set Sample Time Inheritance for System Object

For a System object that has one or more inputs, to disallow model reference discrete sample time inheritance for that object, set the sample time inheritance to `false`. Include this code in your class definition file for the object.

```
methods (Access = protected)
   function flag = allowModelReferenceDiscreteSampleTimeInheritanceImpl(~)
      flag = false;
   end
end
```

- “Set Model Reference Discrete Sample Time Inheritance” (Simulink)
- “Overview of Model Referencing” (Simulink)
- “Sample Times for Model Referencing” (Simulink)

See Also

See Also

matlab.System

Topics

"Set Model Reference Discrete Sample Time Inheritance" (Simulink)
"Overview of Model Referencing" (Simulink)
"Sample Times for Model Referencing" (Simulink)

getDiscreteStateImpl

Class: matlab.System
Package: matlab

Discrete state property values

Syntax

```
s = getDiscreteStateImpl(obj)
```

Description

`s = getDiscreteStateImpl(obj)` returns a struct `s` of internal state value properties, which have the `DiscreteState` attribute. The field names of the struct are the object's `DiscreteState` property names. To restrict or change the values returned by `getDiscreteState` method, you can override this `getDiscreteStateImpl` method.

`getDiscreteStatesImpl` is called by the `getDiscreteState` method, which is called by the `setup` method.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method.

Input Arguments

`obj`

System object handle

Output Arguments

`s`

State values, returned as a struct

Examples

Get Discrete State Values

Use the `getDiscreteStateImpl` method in your class definition file to get the discrete states of the object.

```
methods (Access = protected)
   function s = getDiscreteStateImpl(obj)
   end
end
```

See Also

See Also

setupImpl

Topics

"Define Property Attributes"

getGlobalNamesImpl

Class: matlab.System
Package: matlab

Global variable names for MATLAB System block

Syntax

```
name = getGlobalNamesImpl(obj)
```

Description

`name = getGlobalNamesImpl(obj)` specifies the names of global variables that are declared in a System object for use in a Simulink P-code file. For P-code files, in addition to declaring your global variables in `stepImpl`, `outputImpl`, or `updateImpl`, you must include the `getGlobalNamesImpl` method. You declare global variables in a cell array in the `getGlobalNamesImpl` method. System objects that contain these global variables are included in Simulink using a MATLAB System block. To enable a global variable in Simulink, your model also must include a Data Store Memory block with a **Data Store Name** that matches the global variable name.

`getGlobalNamesImpl` is called by the MATLAB System block.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object

Output Arguments

name

Name of the cell array containing the global variable names. The elements of the cell array are character vectors.

Examples

Specify Global Names

Specify two global names in your class definition file.

```
methods(Access = protected)
    function glnames = getGlobalNamesImpl(obj)
      glnames = {'FEE','OTHERFEE'};
    end

    function y = stepImpl(obj,u)
      global FEE
      global OTHERFEE
      y = u - FEE * obj.lastData + OTHERFEE;
      obj.lastData = u;
    end
end
```

- "System Object Global Variables in Simulink" (Simulink)

See Also

See Also

outputImpl | stepImpl | updateImpl

Topics

"System Object Global Variables in Simulink" (Simulink)

Introduced in R2016b

getHeaderImpl

Class: matlab.System
Package: matlab

Header for System object display

Syntax

```
header = getHeaderImpl
```

Description

`header = getHeaderImpl` specifies the dialog header to display on the MATLAB System block dialog box. If you do not specify the `getHeaderImpl` method, no title or text appears for the header in the block dialog box.

`getHeaderImpl` is called by the MATLAB System block.

Note: You must set `Access = protected` and `Static` for this method.

Output Arguments

`header`

Header text

Examples

Define Header for System Block Dialog Box

Define a header in your class definition file for the `EnhancedCounter` System object.

```
methods (Static, Access = protected)
```

```
    function header = getHeaderImpl
       header = matlab.system.display.Header('EnhancedCounter',...
           'Title','Enhanced Counter');
    end
end
```

- "Add Header to MATLAB System Block" (Simulink)

See Also

See Also

getPropertyGroupsImpl

Topics

"Add Header to MATLAB System Block" (Simulink)

getInputNamesImpl

Class: matlab.System
Package: matlab

Names of System block input ports

Syntax

```
[name1,name2,...] = getInputNamesImpl(obj)
```

Description

`[name1,name2,...] = getInputNamesImpl(obj)` specifies the names of the input ports of the System object on a MATLAB System block. The number of returned input names matches the number of inputs returned by the `getNumInputs` method. If you change a property value that changes the number of inputs, the names of those inputs also change.

`getInputNamesImpl` is called by the `getInputNames` method by the MATLAB System block.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object

Output Arguments

`name1,name2,...`

Names of the inputs for the specified object, returned as character vectors

Default: empty character vector

Examples

Specify Input Port Name

Specify in your class definition file the names of two input ports as `'upper'` and `'lower'`.

```
methods (Access = protected)
   function varargout = getInputNamesImpl(obj)
      numInputs = getNumInputs(obj);
      varargout = cell(1,numInputs);
      varargout{1} = 'upper';
      if numInputs > 1
         varargout{2} = 'lower';
      end
   end
end
```

- "Specify Input and Output Names" (Simulink)

See Also

See Also

getNumInputsImpl | getOutputNamesImpl

Topics

"Specify Input and Output Names" (Simulink)

getNumInputsImpl

Class: matlab.System
Package: matlab

Number of inputs to the System object

Syntax

```
num = getNumInputsImpl(obj)
```

Description

`num = getNumInputsImpl(obj)` returns the number of inputs expected by the System object.

If your object has a variable number of inputs (uses `varargin`), implement the `getNumInputsImpl` method in your class definition file.

If the number of inputs expected by the object is fixed (does not use `varargin`), the default `getNumInputsImpl` determines the required number of inputs. In this case, you do not need to include `getNumInputsImpl` in your class definition file.

`getNumInputsImpl` is called by the `getNumInputs` method and by the `setup` method if the number of inputs has not been determined already.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method.

If you set the return argument, `num`, from an object property, that object property must have the `Nontunable` attribute.

Input Arguments

`obj`

System object

Output Arguments

num

Number of inputs expected when running the object, returned as an integer.

Default: 1

Examples

Set Number of Inputs

Specify the number of inputs (2, in this case) expected by the object.

```
methods (Access = protected)
   function num = getNumInputsImpl(~)
      num = 2;
   end
end
```

Set Number of Inputs to Zero

Specify that the object does not accept any inputs.

```
methods (Access = protected)
   function num = getNumInputsImpl(~)
      num = 0;
   end
end
```

- "Change Number of Inputs or Outputs"

See Also

See Also

getNumOutputsImpl | setupImpl | stepImpl

Topics

"Change Number of Inputs or Outputs"

getNumOutputsImpl

Class: matlab.System
Package: matlab

Number of outputs from System object

Syntax

```
num = getNumOutputsImpl(obj)
```

Description

`num = getNumOutputsImpl(obj)` returns the number of outputs expected from the System object.

If your System object has a variable number of outputs (uses `varargout`), implement the `getNumOutputsImpl` method in your class definition file to determine the number of outputs. Use `nargout` in the `stepImpl` method to assign the expected number of outputs.

If the number of outputs expected by the System object is fixed (does not use `varargout`), the object determines the required number of outputs. In this case, you do not need to implement the `getNumOutputsImpl` method.

`getNumOutputsImpl` is called by the `getNumOutputs` method, if the number of outputs has not been determined already.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method.

If you set the return argument, `num`, from an object property, that object property must have the `Nontunable` attribute.

Input Arguments

obj

System object

Output Arguments

num

Number of outputs from the specified object, returned as an integer.

Examples

Set Number of Outputs

Specify the number of outputs (2, in this case) returned from the object.

```
methods (Access = protected)
   function num = getNumOutputsImpl(~)
      num = 2;
   end
end
```

Set Number of Outputs to Zero

Specify that the object does not return any outputs.

```
methods (Access = protected)
   function num = getNumOutputsImpl(~)
      num = 0;
   end
end
```

Use nargout for Variable Number of Outputs

Use `nargout` in the `stepImpl` method when you have a variable number of outputs and will generate code.

```
methods (Access = protected)
```

```
   function varargout = stepImpl(~,varargin)
      for i = 1:nargout
         varargout{i} = varargin{i}+1;
      end
   end
end
```

- "Change Number of Inputs or Outputs"

See Also

See Also

getNumInputsImpl | setupImpl | stepImpl

Topics

"Change Number of Inputs or Outputs"

getOutputNamesImpl

Class: matlab.System
Package: matlab

Names of System block output ports

Syntax

```
[name1,name2,...] = getOutputNamesImpl(obj)
```

Description

`[name1,name2,...] = getOutputNamesImpl(obj)` returns the names of the output ports from System object, `obj` implemented in a MATLAB System block. The number of returned output names matches the number of outputs returned by the `getNumOutputs` method. If you change a property value that affects the number of outputs, the names of those outputs also change.

`getOutputNamesImpl` is called by the `getOutputNames` method and by the MATLAB System block.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object

Output Arguments

`name1,name2,...`

Names of the outputs for the specified object, returned as character vectors.

Default: empty character vector

Examples

Specify Output Port Name

Specify the name of an output port as `'count'`.

```
methods (Access = protected)
   function outputName = getOutputNamesImpl(~)
      outputName = 'count';
   end
end
```

- "Specify Input and Output Names" (Simulink)

See Also

See Also

getInputNamesImpl | getNumOutputsImpl

Topics

"Specify Input and Output Names" (Simulink)

getPropertyGroupsImpl

Class: matlab.System
Package: matlab

Property groups for System object display

Syntax

```
group = getPropertyGroupsImpl
```

Description

`group = getPropertyGroupsImpl` specifies how to group properties for display. You specify property sections (`matlab.system.display.Section`) and section groups (`matlab.system.display.SectionGroup`) within this method. Sections arrange properties into groups. Section groups arrange sections and properties into groups. If a System object, included through the MATLAB System block, has a section, but that section is not in a section group, its properties appear above the block dialog tab panels.

If you do not include a `getPropertyGroupsImpl` method in your code, all public properties are included in the dialog box by default. If you include a `getPropertyGroupsImpl` method but do not list a property, that property does not appear in the dialog box.

When the System object is displayed at the MATLAB command line, the properties are grouped as defined in `getPropertyGroupsImpl`. If your `getPropertyGroupsImpl` defines multiple section groups, only properties from the first section group are displayed at the command line. To display properties in other sections, a link is provided at the end of a System object property display. Group titles are also displayed at the command line. To omit the "Main" title for the first group of properties, set `TitleSource` to `'Auto'` in `matlab.system.display.SectionGroup`.

`getPropertyGroupsImpl` is called by the MATLAB System block and when displaying the object at the command line.

Note: You must set `Access = protected` and `Static` for this method.

Output Arguments

group

Property group or groups

Examples

Define Block Dialog Tabs

Define two block dialog tabs, each containing specific properties. For this example, you use the `getPropertyGroupsImpl`, `matlab.system.display.SectionGroup`, and `matlab.system.display.Section` methods in your class definition file.

```
methods (Static, Access = protected)
   function groups = getPropertyGroupsImpl
      valueGroup = matlab.system.display.Section(...
           'Title','Value parameters',...
           'PropertyList',{'StartValue','EndValue'});

      thresholdGroup = matlab.system.display.Section(...
           'Title','Threshold parameters',...
           'PropertyList',{'Threshold','UseThreshold'});

      mainGroup = matlab.system.display.SectionGroup(...
           'Title','Main', ...
           'Sections',[valueGroup,thresholdGroup]);

      initGroup = matlab.system.display.SectionGroup(...
           'Title','Initial conditions', ...
           'PropertyList',{'IC1','IC2','IC3'});

      groups = [mainGroup,initGroup];
   end
end
```

The resulting dialog box appears as follows.

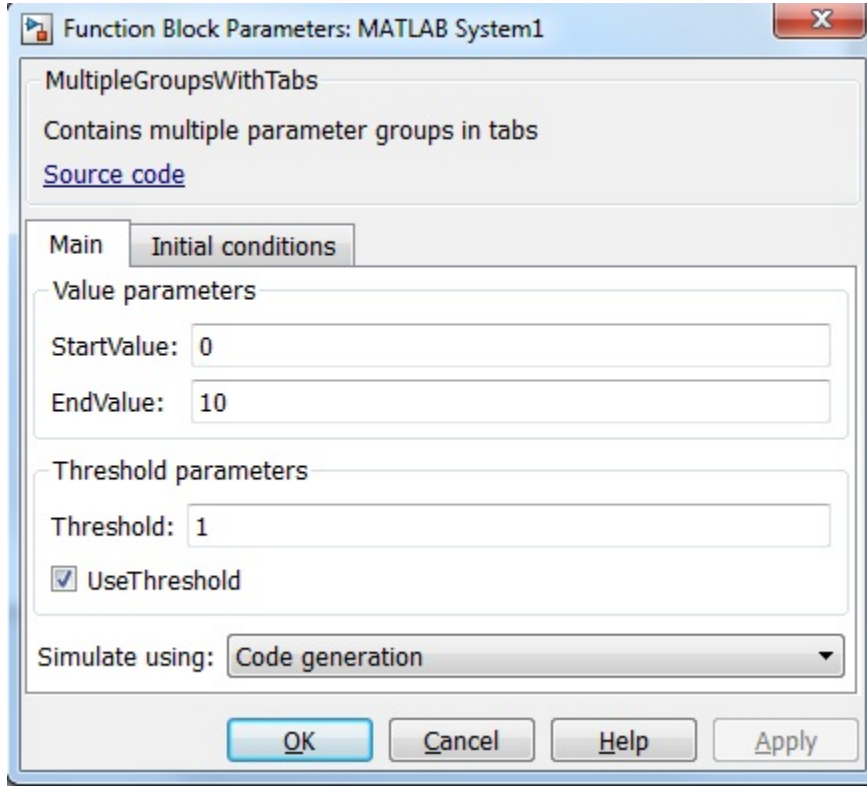
Function Block Parameters: MATLAB System1
MultipleGroupsWithTabs
Contains multiple parameter groups in tabs
Source code
Main
Initial conditions
Value parameters
StartValue:
0
EndValue:
10
Threshold parameters
Threshold:
1
UseThreshold
Simulate using:
Code generation
OK
Cancel
Help
Apply

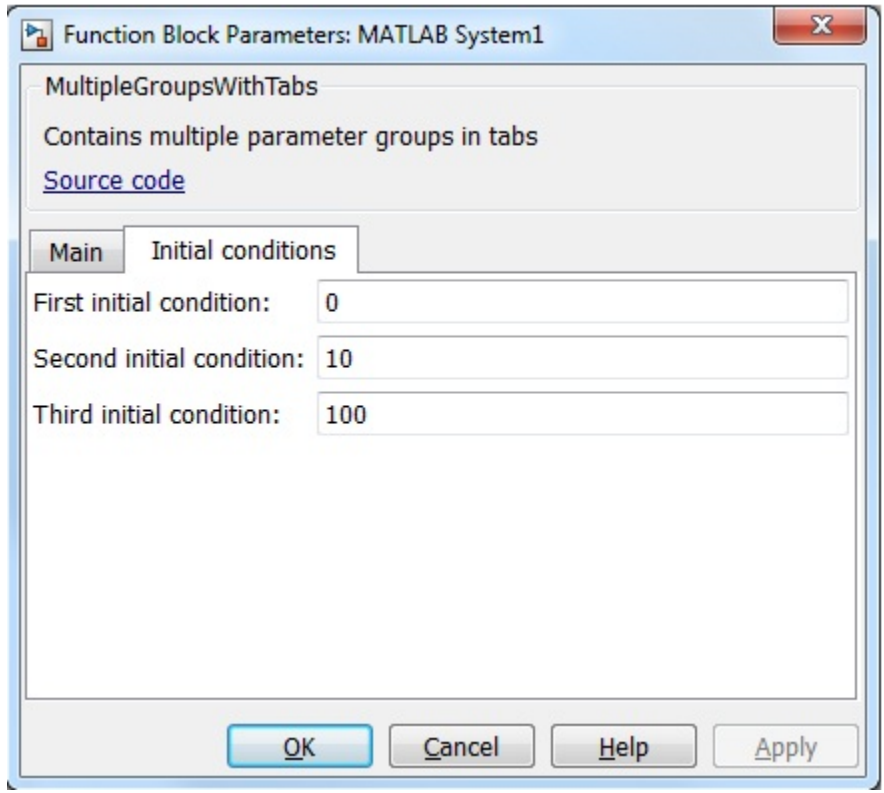

- "Add Property Groups to System Object and MATLAB System Block" (Simulink)

See Also

See Also

matlab.system.display.Header | matlab.system.display.Section | matlab.system.display.SectionGroup

Topics

"Add Property Groups to System Object and MATLAB System Block" (Simulink)

getSimulateUsingImpl

Class: matlab.System
Package: matlab

Specify value for Simulate using parameter

Syntax

```
simmode = getSimulateUsingImpl
```

Description

`simmode = getSimulateUsingImpl` specifies the simulation mode of the System object implemented in a MATLAB System block. The simulation mode restricts your System object to simulation using either code generation or interpreted execution. The associated `showSimulateUsingImpl` method controls whether the **Simulate using** option is displayed on the dialog box.

`getSimulateUsingImpl` is called by the MATLAB System block.

Note: You must set `Access = protected` and `Static` for this method.

Output Arguments

`simmode`

Simulation mode, returned as the character vector `'Code generation'` or `'Interpreted execution'`. If you do not include the `getSimulateUsingImpl` method in your class definition file, the simulation mode is unrestricted. Depending on the value returned by the associated `showSimulateUsingImpl` method, the simulation mode is displayed as either a dropdown list on the dialog box or not at all.

Examples

Specify the Simulation Mode

In the class definition file of your System object, define the simulation mode to display in the MATLAB System block. To prevent **Simulate using** from displaying, see `showSimulateUsingImpl`.

```
methods (Static, Access = protected)
   function simMode = getSimulateUsingImpl
      simMode = 'Interpreted execution';
   end
end
```

- "Control Simulation Type in MATLAB System Block" (Simulink)

See Also

See Also

showSimulateUsingImpl

Topics

"Control Simulation Type in MATLAB System Block" (Simulink)

infoImpl

Class: matlab.System
Package: matlab

Information about System object

Syntax

```
s = infoImpl(obj)
```

Description

`s = infoImpl(obj)` specifies information about the current configuration of a System object. This information is returned in a struct from the `info` method. The default `infoImpl` method, which is used if you do not include `infoImpl` in your class definition file, returns an empty struct.

`infoImpl` is called by the `info` method.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object

Examples

Specify System object Information

Define the `infoImpl` method to return current count information.

```
methods (Access = protected)
```

```
   function s = infoImpl(obj)
      s = struct('Count',obj.Count);
   end
end
```

- "Define System Object Information"

See Also

Topics

"Define System Object Information"

isInactivePropertyImpl

Class: matlab.System
Package: matlab

Inactive property status

Syntax

```
flag = isInactivePropertyImpl(obj,prop)
```

Description

`flag = isInactivePropertyImpl(obj,prop)` specifies whether a public, non-state property is inactive and not visible for the current object configuration. An *inactive property* is a property that is not relevant to the object, given the values of other properties. Inactive properties are not shown if you use the `disp` method to display object properties. If you attempt to use public access to directly access or use `get` or `set` on an inactive property, a warning occurs.

`isInactiveProperty` is called by the `disp` method and by the `get` and `set` methods.

Note: You must set `Access = protected` for this method.

Input Arguments

obj

System object handle

prop

Public, non-state property name

Output Arguments

flag

Inactive status Indicator of the input property `prop` for the current object configuration, returned as a logical scalar value

Examples

Specify When a Property Is Inactive

Display the `InitialValue` property only when the `UseRandomInitialValue` property value is `false`.

```
methods (Access = protected)
  function flag = isInactivePropertyImpl(obj,propertyName)
    if strcmp(propertyName,'InitialValue')
      flag = obj.UseRandomInitialValue;
    else
      flag = false;
    end
  end
end
```

- "Hide Inactive Properties"

See Also

See Also

setProperties

Topics

"Hide Inactive Properties"

isInputSizeLockedImpl

Class: matlab.System
Package: matlab

Locked input size status

Syntax

```
flag = isInputSizeLockedImpl(obj,i)
```

Description

`flag = isInputSizeLockedImpl(obj,i)` specifies whether the `i`th input to the System object cannot change its size during subsequent calls to run that object.. If `flag` is `true`, the size is locked and inputs to the System object cannot change size while the object is locked. If `flag` is `false`, the input is variable size and is not locked, In the unlocked case, the size of inputs to the object can change while the object is running and locked.

`isInputSizeLockedImpl` executes once for each input during System object initialization.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object

`i`

System object input port number

Output Arguments

`flag`

Flag indicating whether the size of inputs to the specified port is locked, returned as a logical scalar value. If the value of `isInputSizeLockedImpl` is `true`, the size of the current input to that port is compared to the first input to that port. If the sizes do not match, an error occurs.

Default: `false`

Examples

Check If Input Size Is Locked

Specify in your class definition file to check whether the size of the System object input is locked.

```
methods (Access = protected)
   function flag = isInputSizeLockedImpl(~,index)
      flag = true;
   end
end
```

- "Specify Locked Input Size"

See Also

See Also

matlab.System

Topics

"Specify Locked Input Size"

loadObjectImpl

Class: matlab.System
Package: matlab

Load System object from MAT file

Syntax

```
loadObjectImpl(obj,s,wasLocked)
```

Description

`loadObjectImpl(obj,s,wasLocked)` implements the code to load a saved System object from a structure, `s`, or from a MAT file. The `wasLocked` input saves the states if the object is locked. Your `loadObjectImpl` method should correspond to your `saveObjectImpl` method to ensure that all saved properties and data are loaded.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object

Examples

Load System object

Load a saved System object. In this example, the object contains a child object, protected and private properties, and a discrete state. It also saves states if the object is locked and calls the `loadObjectImpl` method from the `matlab.System` class.

```
methods (Access = protected)
```

```
  function loadObjectImpl(obj,s,wasLocked)
    obj.child = matlab.System.loadObject(s.child);

    obj.protectedprop = s.protectedprop;
    obj.pdependentprop = s.pdependentprop;

    if wasLocked
      obj.state = s.state;
    end

    loadObjectImpl@matlab.System(obj,s,wasLocked);
  end
end
```

- "Save and Load System Object"

See Also

See Also

saveObjectImpl

Topics

"Save and Load System Object"

processTunedPropertiesImpl

Class: matlab.System
Package: matlab

Action when tunable properties change

Syntax

```
processTunedPropertiesImpl(obj)
```

Description

`processTunedPropertiesImpl(obj)` specifies the algorithm to perform when one or more tunable property values change. This method is called as part of the next call to the System object after a tunable property value changes. A property is tunable only if its `Nontunable` attribute is `false`, which is the default.

`processTunedPropertiesImpl` is called when you run the System object.

Note: You must set `Access = protected` for this method.

You cannot modify any tunable properties in this method if its System object will be used in the Simulink MATLAB System block.

Input Arguments

`obj`

System object

Examples

Specify Action When Tunable Property Changes

Use `processTunedPropertiesImpl` to recalculate the lookup table if the value of either the `NumNotes` or `MiddleC` property changes before the next call to the System object. `propChange` indicates if either property has changed.

```
methods (Access = protected)
   function processTunedPropertiesImpl(obj)
      propChange = isChangedProperty(obj,'NumNotes') ||...
         isChangedProperty(obj,'MiddleC')
      if propChange
         obj.pLookupTable = obj.MiddleC * (1+log(1:obj.NumNotes)/log(12));
      end
    end
end
```

- "Validate Property and Input Values"
- "Define Property Attributes"

Tips

Use this method when a tunable property affects the value of a different property.

To check if a property has changed since `stepImpl` was last called, use `isChangedProperty` within `processTunedPropertiesImpl`. See "Specify Action When Tunable Property Changes" on page 1-13503 for an example.

In MATLAB when multiple tunable properties are changed before running the System object, `processTunedPropertiesImpl` is called only once for all the changes. `isChangedProperty` returns `true` for all the changed properties.

In Simulink, when a parameter is changed in a MATLAB System block dialog, the next simulation step calls `processTunedPropertiesImpl` before calling `stepImpl`. All tunable parameters are considered changed and `processTunedPropertiesImpl` method is called for each of them. `isChangedProperty` returns `true` for all the dialog properties.

See Also

See Also

setProperties | validatePropertiesImpl

Topics

"Validate Property and Input Values"
"Define Property Attributes"

releaseImpl

Class: matlab.System
Package: matlab

Release resources

Syntax

```
releaseImpl(obj)
```

Description

`releaseImpl(obj)` releases any resources used by the System object, such as file handles or devices. This method also performs any necessary cleanup tasks. To release resources for a System object, you must use `releaseImpl` instead of a destructor.

`releaseImpl` is called by the `release` method. `releaseImpl` is also called when the object is deleted or cleared from memory, or when all references to the object have gone out of scope.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object

Examples

Close a File and Release Its Resources

Use the `releaseImpl` method to close a file opened by the System object.

```
methods (Access = protected)
   function releaseImpl(obj)
     fclose(obj.pFileID);
   end
end
```

- "Release System Object Resources"

See Also

See Also

resetImpl

Topics

"Release System Object Resources"

resetImpl

Class: matlab.System
Package: matlab

Reset System object states

Syntax

```
resetImpl(obj)
```

Description

`resetImpl(obj)` specifies the algorithm that initializes or resets the states of a System object. Typically you reset the states to a set of initial values, which is useful for initialization at the start of simulation.

`resetImpl` is called by the `reset` method only if the object is locked. The object remains locked after it is reset. `resetImpl` is also called by the `setup` method, after the `setupImpl` method.

Note: You must set `Access = protected` for this method.

You cannot modify any tunable properties in this method if its System object will be used in the Simulink MATLAB System block.

Input Arguments

`obj`

System object

Examples

Reset Property Value

Use the `reset` method to reset the state of the counter stored in the `pCount` property to zero.

```
methods (Access = protected)
   function resetImpl(obj)
      obj.Count = 0;
   end
end
```

- "Reset Algorithm State"

See Also

See Also

releaseImpl

Topics

"Reset Algorithm State"

saveObjectImpl

Class: matlab.System
Package: matlab

Save System object in MAT file

Syntax

```
s = saveObjectImpl(obj)
```

Description

`s = saveObjectImpl(obj)` specifies the System object properties and state values to be saved in a structure or MAT file. `save` calls `saveObject`, which then calls `saveObjectImpl`. To save a System object in generated code, the object must be unlocked and it cannot contain or be a child object.

If you do not define a `saveObjectImpl` method for your System object class, only public properties and properties with the `DiscreteState` attribute are saved.

To save any private or protected properties or state information, you must define a `saveObjectImpl` in your class definition file.

End users can use `load`, which calls `loadObjectImpl` to load a saved System object into their workspace.

Tip: Save the state of an object only if the object is locked. When the user loads that saved object, it loads in that locked state.

To save child object information, use the associated `saveObject` method within the `saveObjectImpl` method.

Note: You must set `Access = protected` for this method.

Input Arguments

obj

System object

Examples

Define Property and State Values to Save

Define what is saved for the System object. Call the base class version of `saveObjectImpl` to save public properties. Then, save any child System objects and any protected and private properties. Finally, save the state if the object is locked.

```
methods (Access = protected)
  function s = saveObjectImpl(obj)
    s = saveObjectImpl@matlab.System(obj);
    s.child = matlab.System.saveObject(obj.child);
    s.protectedprop = obj.protectedprop;
    s.pdependentprop = obj.pdependentprop;
    if isLocked(obj)
      s.state = obj.state;
    end
  end
end
```

- "Save and Load System Object"

See Also

See Also

loadObjectImpl

Topics

"Save and Load System Object"

setProperties

Class: matlab.System
Package: matlab

Set property values using name-value pairs

Syntax

```
setProperties(obj,numargs,name1,value1,name2,value2,...)
setProperties(obj,numargs,arg1,...,argN,propvalname1,...propvalnameN)
```

Description

`setProperties(obj,numargs,name1,value1,name2,value2,...)` provides the name-value pair inputs to the System object constructor. Use this syntax if every input must specify both name and value.

`setProperties(obj,numargs,arg1,...,argN,propvalname1,...propvalnameN)` provides the value-only inputs, which you can follow with the name-value pair inputs to the System object during object construction. Use this syntax if you want to allow users to specify one or more inputs by their values only.

Input Arguments

`obj`

System object

`numargs`

Number of inputs passed in by the object constructor

`name1,name2,...`

Name of property

value1,value2,...

Value of the property

arg1,...argN

Value of property (for value-only input to the object constructor)

propvalname1,...propvalnameN

Name of the value-only property

Examples

Setup Value-Only Inputs

Set up an object so users can specify value-only inputs for `VProp1`, `VProp2`, and other property values via name-value pairs when constructing the object.

```
methods
   function obj = MyFile(varargin)
      setProperties(obj,nargin,varargin{:},'VProp1','VProp2');
   end
end
```

- "Set Property Values at Construction Time"

See Also

Topics

"Set Property Values at Construction Time"

setupImpl

Class: matlab.System
Package: matlab

Initialize System object

Syntax

```
setupImpl(obj)
setupImpl(obj,input1,input2,...)
```

Description

`setupImpl(obj)` implements one-time tasks. You typically use `setupImpl` to set private properties so they do not need to be calculated each time `stepImpl` method is called. To acquire resources for a System object, you must use `setupImpl` instead of a constructor.

`setupImpl` executes the first time the System object is run after that object has been created. It also executes the next time the object is run after an object has been released.

`setupImpl(obj,input1,input2,...)` sets up a System object using one or more of the `stepImpl` input specifications. The number and order of inputs must match the number and order of inputs defined in the `stepImpl` method. You pass the inputs into `setupImpl` to use the specifications, such as size and data types in the one-time calculations.

`setupImpl` is called by the `setup` method, which is done automatically as the first subtask of the running an unlocked System object.

Note: You can omit this method from your class definition file if your System object does not require any setup tasks.

You must set `Access = protected` for this method.

Do not use `setupImpl` to initialize or reset states. For states, use the `resetImpl` method.

You cannot modify any tunable properties in this method if its System object will be used in the Simulink MATLAB System block.

Input Arguments

obj

System object handle

input1,input2,...

Inputs to the `stepImpl` method

Examples

Setup a File for Writing

This example shows how to open a file for writing using the `setupImpl` method in your class definition file.

```
methods (Access = protected)
   function setupImpl(obj)
      obj.pFileID = fopen(obj.Filename,'wb');
      if obj.pFileID < 0
         error('Opening the file failed');
       end
    end
end
```

Initialize Properties Based on Object Inputs

This example shows how to use `setupImpl` to specify that running the object initializes the properties of an input. In this case, calls to run the object, which includes input `u`, initialize the object states in a matrix of size u.

```
methods (Access = protected)
   function setupImpl(obj, u)
    obj.State = zeros(size(u),'like', u);
  end
```

```
end
```

- "Initialize Properties and Setup One-Time Calculations"
- "Set Property Values at Construction Time"

Tips

To validate properties or inputs use the `validatePropertiesImpl`, `validateInputsImpl`, or `setProperties` methods. Do not include validation in `setupImpl`.

Do not use the `setupImpl` method to set up input values.

See Also

See Also

`matlab.System Constructor` | setProperties | validateInputsImpl | validatePropertiesImpl

Topics

"Initialize Properties and Setup One-Time Calculations"
"Set Property Values at Construction Time"

showFiSettingsImpl

Class: matlab.System
Package: matlab

Fixed point data type tab visibility for System objects

Syntax

```
flag = showFiSettingsImpl
```

Description

`flag = showFiSettingsImpl` specifies whether the Data Types tab appears on the MATLAB System block dialog box. The Data Types tab includes parameters to control processing of fixed point data the MATLAB System block. You cannot specify which parameters appear on the tab. If you implement `showFiSettingsImpl`, the simulation mode is set code generation.

`showFiSettingsImpl` is called by the MATLAB System block.

The parameters that appear on the Data Types tab, which cannot be customized, are

- **Saturate on integer overflow** is a check box to control the action to take on integer overflow for built-in integer types. The default is that the box is checked, which indicates to saturate. This is also the default for when **Same as MATLAB** is selected as the **MATLAB System fimath** option.
- **Treat these inherited Simulink signal types as fi objects** is a pull down that indicates which inherited data types to treat as fi data types. Valid options are `Fixed point` and `Fixed point & integer`. The default value is `Fixed point`.
- **MATLAB System fimath** has two radio button options: **Same as MATLAB** and **Specify Other**. The default, **Same as MATLAB**, uses the current MATLAB fixed-point math settings. **Specify Other** enables the edit box for specifying the desired fixed-point math settings. For information on setting fixed-point math, see `fimath`, in the Fixed-Point Designer documentation.

Note: If you do not want to display the tab, you do not need to implement this method in your class definition file.

You must set `Access = protected` and `Static` for this method.

Output Arguments

`flag`

Flag indicating whether to display the Data Types tab on the MATLAB System block mask, returned as a logical scalar value. Returning a `true` value displays the tab. A `false` value does not display the tab.

Default: `false`

Examples

Show the Data Types Tab

Show the Data Types tab on the MATLAB System block dialog box.

```
methods (Static, Access = protected)
   function isVisible = showFiSettingsImpl
     isVisible = true;
   end
end
```

If you set the flag, `isVisible`, to `true`, the tab appears as follows when you add the object to Simulink with the MATLAB System block.

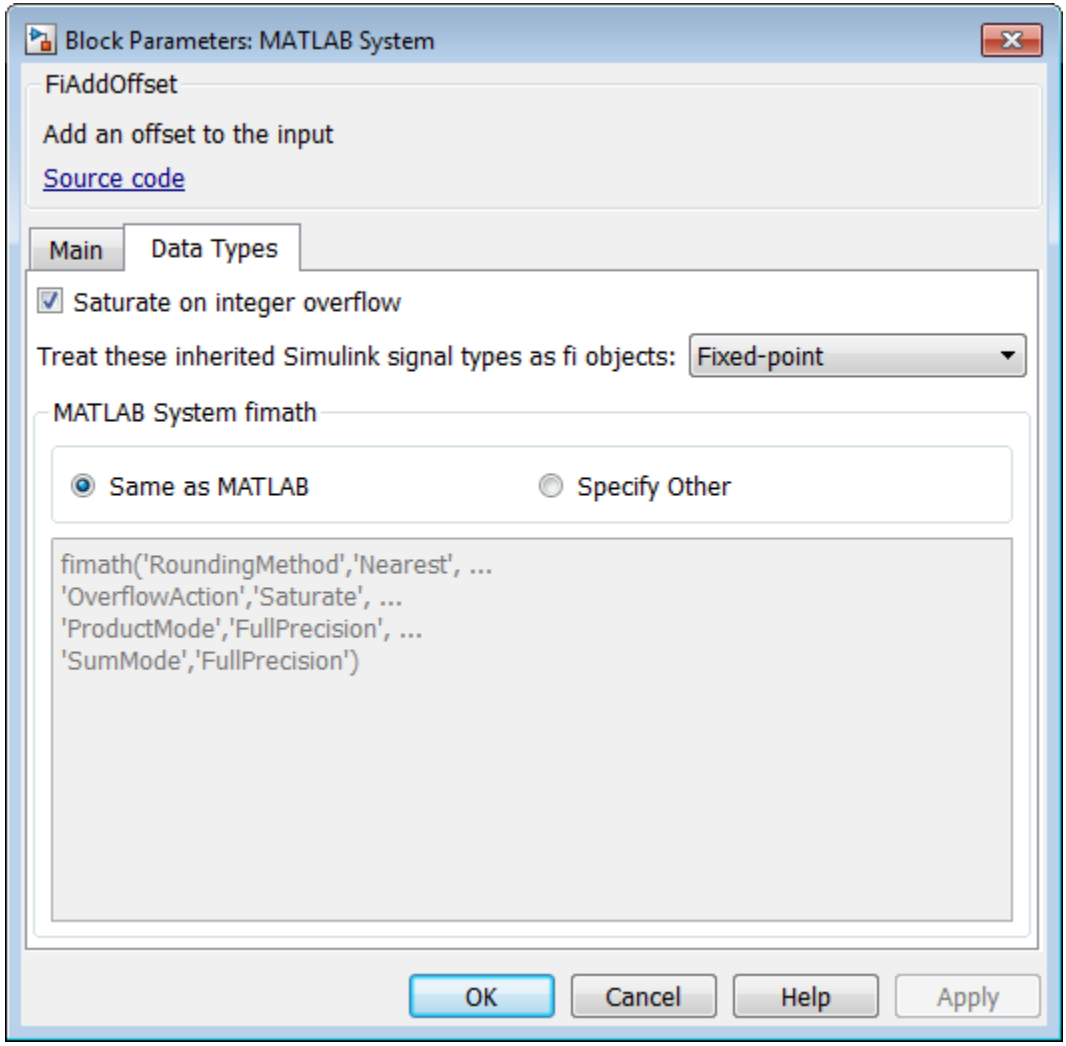

- "Add Data Types Tab to MATLAB System Block" (Simulink)

See Also

Topics

"Add Data Types Tab to MATLAB System Block" (Simulink)

showSimulateUsingImpl

Class: matlab.System
Package: matlab

Simulate Using visibility

Syntax

```
flag = showSimulateUsingImpl
```

Description

`flag = showSimulateUsingImpl` specifies whether **Simulation mode** appears on the MATLAB System block dialog box.

`showSimulateUsingImpl` is called by the MATLAB System block.

Note: You must set `Access = protected` and `Static` for this method.

Output Arguments

`flag`

Flag indicating whether to display the **Simulate using** parameter and dropdown list on the MATLAB System block mask, returned as a logical scalar value. A `true` value displays the parameter and dropdown list. A `false` value hides the parameter and dropdown list.

Default: `true`

Examples

Hide the Simulate using Parameter

Hide the **Simulate using** parameter on the MATLAB System block dialog box.

```
methods (Static, Access = protected)
  function flag = showSimulateUsingImpl
    flag = false;
  end
end
```

If you set the flag to `true` or omit the `showSimulateUsingImpl` method, which defaults to `true`, the dialog appears as follows when you add the object to Simulink with the MATLAB System block.

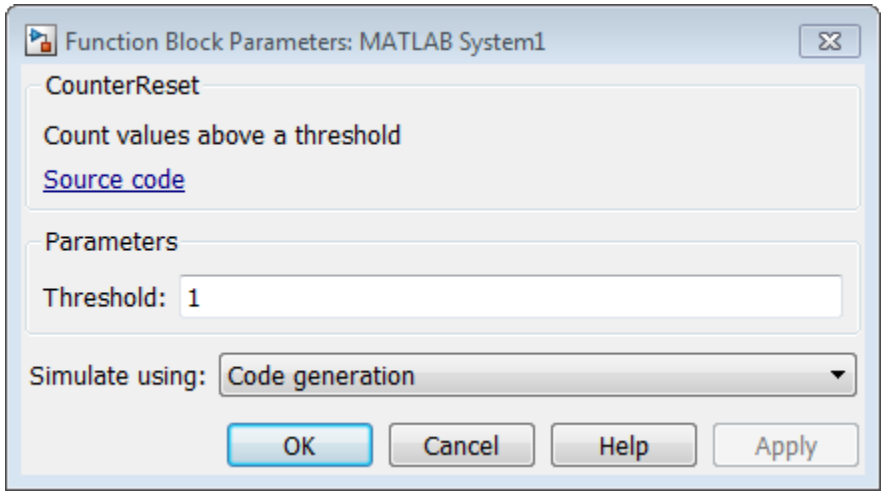

If you also specify a single value for `getSimulateUsingImpl`, the dialog appears as follows when you add the object to Simulink with the MATLAB System block.

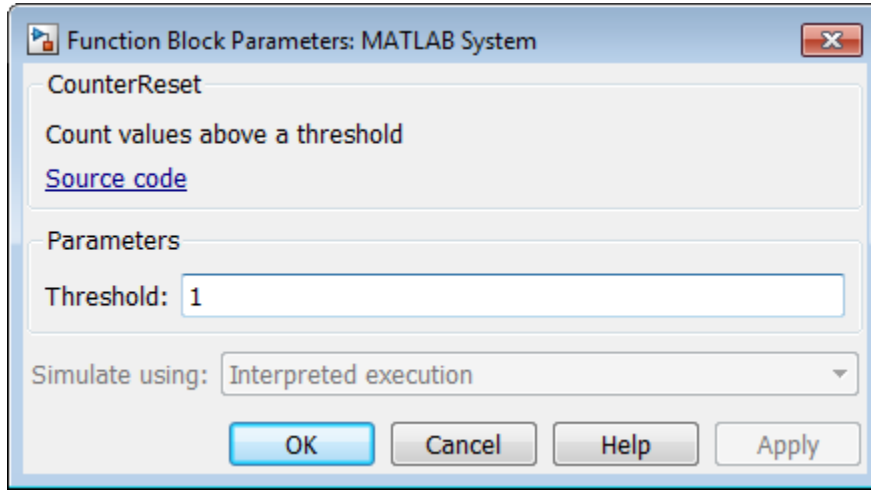

- "Control Simulation Type in MATLAB System Block" (Simulink)

See Also

See Also

getSimulateUsingImpl

Topics

"Control Simulation Type in MATLAB System Block" (Simulink)

stepImpl

Class: matlab.System
Package: matlab

System output and state update equations

Syntax

```
[output1,output2,...] = stepImpl(obj,input1,input2,...)
```

Description

`[output1,output2,...] = stepImpl(obj,input1,input2,...)` specifies the algorithm to execute when you run the System object. Running the object calculates the outputs and updates the object's state values using the inputs, properties, and state update equations. You can also run an object using function-like syntax instead of the `step` method. For example, if you define an FFT object using `txfourier = dsp.FFT`, you can run it simply by using `txfourier()`.

`stepImpl` is called when you run the System object.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object handle

`input1,input2,...`

Inputs to the System object

Output Arguments

`output`

Output returned from the System object.

Examples

Specify System Object Algorithm

Use the `stepImpl` method to increment two numbers.

```
methods (Access = protected)
   function [y1,y2] = stepImpl(obj,x1,x2)
      y1 = x1 + 1;
      y2 = x2 + 1;
    end
end
```

- "Define Basic System Objects"
- "Change Number of Inputs or Outputs"

Tips

The number of input arguments and output arguments must match the values returned by the `getNumInputsImpl` and `getNumOutputsImpl` methods, respectively.

Do not call `release` within the `stepImpl` method.

See Also

See Also

getNumInputsImpl | getNumOutputsImpl | validateInputsImpl

Topics

"Define Basic System Objects"

"Change Number of Inputs or Outputs"

supportsMultipleInstanceImpl

Class: matlab.System
Package: matlab

Support System object in Simulink For Each subsystem

Syntax

```
flag = supportsMultipleInstanceImpl(obj)
```

Description

`flag = supportsMultipleInstanceImpl(obj)` specifies whether the System object can be used in a Simulink For Each subsystem via the MATLAB System block. To enable For Each support, you must include the `supportsMultipleInstanceImpl` in your class definition file and have it return `true`. Do not enable For Each support if your System object allocates exclusive resources that may conflict with other System objects, such as allocating file handles, memory by address, or hardware resources.

During Simulink model compilation and propagation, the MATLAB System block calls the `supportMultipleInstance` method, which then calls the `supportsMultipleInstanceImpl` method to determine For Each support.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method.

Input Arguments

`obj`

System object handle

Output Arguments

`flag`

Boolean value indicating whether the System object can be used in a For Each subsystem. The default value, if you do not include the `supportMultipleInstance` method, is `false`.

Examples

Enable For-Each Support for System Object

Specify in your class definition file that the System object can be used in a Simulink For Each subsystem.

```
methods (Access = protected)
   function flag = supportsMultipleInstanceImpl(obj)
       flag = true;
   end
end
```

- "Enable For Each Subsystem Support" (Simulink)

See Also

See Also

matlab.System

Topics

"Enable For Each Subsystem Support" (Simulink)

validateInputsImpl

Class: matlab.System
Package: matlab

Validate inputs to System object

Syntax

```
validateInputsImpl(obj,input1,input2,...)
```

Description

`validateInputsImpl(obj,input1,input2,...)` validates inputs to the System object the first time the object runs. Validation includes checking data types, complexity, cross-input validation, and validity of inputs controlled by a property value.

`validateInputsImpl` is called by the `setup` method before `setupImpl`. `validateInputsImpl` executes only once.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method. Use the `processTunedPropertiesImpl` method or `setupImpl` method to modify properties.

Input Arguments

`obj`

System object handle

`input1,input2,...`

Inputs to the `setup` method

Examples

Validate Input Type

Validate that the input is numeric.

```
methods (Access = protected)
   function validateInputsImpl(~,x)
      if ~isnumeric(x)
         error('Input must be numeric');
      end
   end
end
```

- "Validate Property and Input Values"

See Also

See Also

setupImpl | validatePropertiesImpl

Topics

"Validate Property and Input Values"

validatePropertiesImpl

Class: matlab.System
Package: matlab

Validate property values

Syntax

```
validatePropertiesImpl(obj)
```

Description

`validatePropertiesImpl(obj)` validates interdependent or interrelated property values the first time the System object runs.

`validatePropertiesImpl` is the first method called by the `setup` method. `validatePropertiesImpl` also is called before the `processTunedPropertiesImpl` method.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method. Use the `processTunedPropertiesImpl` method or `setupImpl` method to modify properties.

Tips

To check if a property has changed since `stepImpl` was last called, use `isChangedProperty(obj,property)` within `validatePropertiesImpl`.

Input Arguments

`obj`

System object handle

Examples

Validate a Property

Validate that the `useIncrement` property is `true` and that the value of the `increment` property is greater than zero.

```
methods (Access = protected)
   function validatePropertiesImpl(obj)
      if obj.useIncrement && obj.increment < 0
         error('The increment value must be positive');
      end
    end
end
```

- "Validate Property and Input Values"

See Also

See Also

processTunedPropertiesImpl | setupImpl | validateInputsImpl

Topics

"Validate Property and Input Values"

matlab.system.display.Action class

Package: matlab.system.display

Custom button

Syntax

```
matlab.system.display.Action(action)
matlab.system.display.Action(action,Name,Value)
```

Description

`matlab.system.display.Action(action)` specifies a button to display on the MATLAB System block. This button executes a function by launching a System object method or invoking any MATLAB function or code.

A typical button function launches a figure. The launched figure is decoupled from the block dialog box. Changes to the block are not synced to the displayed figure.

You define `matlab.system.display.Action` within the `getPropertyGroupsImpl` method in your class definition file. You can define multiple buttons using separate instances of `matlab.system.display.Action` in your class definition file.

`matlab.system.display.Action(action,Name,Value)` includes `Name,Value` pair arguments, which you can use to specify any properties.

Input Arguments

`action`

Action taken when the user presses the specified button on the MATLAB System block dialog. The action is defined as a function handle or as a MATLAB command. If you define the action as a function handle, the function definition must define two inputs. These inputs are a `matlab.system.display.ActionData` object and a System object instance, which can be used to invoke a method.

A `matlab.system.display.ActionData` object is the callback object for a display action. You use the `UserData` property of `matlab.system.display.ActionData` to store persistent data, such as a figure handle.

Name-Value Pair Arguments

Specify optional comma-separated pairs of `Name,Value` arguments. `Name` is the argument name and `Value` is the corresponding value. `Name` must appear inside single quotes (`' '`). You can specify several name and value pair arguments in any order as `Name1,Value1,...,NameN,ValueN`.

Properties

You specify these properties as part of the input using `Name,Value` pair arguments. Optionally, you can define them using `object.property` syntax.

- `ActionCalledFcn` — Action to take when the button is pressed. You cannot specify this property using a Name-Value pair argument.
- `Label` — Text to display on the button. The default value is an empty character vector.
- `Description` — Text for the button tooltip. The default value is an empty character vector.
- `Placement` — Character vector indicating where on a separate row in the property group to place the button. Valid values are `'first'`, `'last'`, or a property name. If you specify a property name, the button is placed above that property. The default value is `'last'`.
- `Alignment` — Character vector indicating how to align the button. Valid values are `'left'` and `'right'`. The default value is `'left'`.

Examples

Define Button on MATLAB System Block

Define a **Visualize** button and its associated function to open a figure that plots a ramp using the parameter values in the block dialog.

```
methods(Static,Access = protected)
```

```
  function group = getPropertyGroupsImpl
  group = matlab.system.display.Section(mfilename('class'));
  group.Actions = matlab.system.display.Action(@(~,obj)...
      visualize(obj),'Label','Visualize');
  end
end

methods
  function obj = PlotRamp(varargin)
    setProperties(obj,nargin,varargin{:});
  end

  function visualize(obj)
    figure;
    d = 1:obj.RampLimit;
    plot(d);
  end
end
```

When you specify the System object in the MATLAB System block, the resulting block dialog box appears as follows.

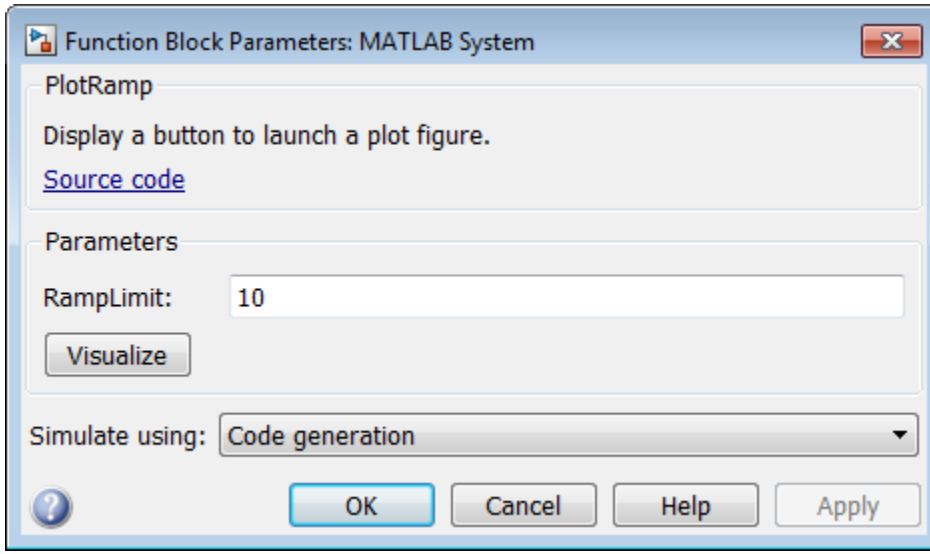

To open the same figure, rather than multiple figures, when the button is pressed more than once, use this code instead.

```
methods(Static,Access = protected)
  function group = getPropertyGroupsImpl
    group = matlab.system.display.Section(mfilename('class'));
    group.Actions = matlab.system.display.Action(@(actionData,obj)...
       visualize(obj,actionData),'Label','Visualize');
  end
end

methods
  function obj = ActionDemo(varargin)
    setProperties(obj,nargin,varargin{:});
  end

  function visualize(obj,actionData)
    f = actionData.UserData;
    if isempty(f) || ~ishandle(f)
      f = figure;
      actionData.UserData = f;
    else
        figure(f); % Make figure current
    end

    d = 1:obj.RampLimit;
    plot(d);
  end
end
```

- "Object-Oriented Programming"
- Class Attributes
- Property Attributes
- "Add Button to MATLAB System Block" (Simulink)

See Also

See Also

matlab.System.getPropertyGroupsImpl | matlab.system.display.Section | matlab.system.display.SectionGroup

Topics

"Object-Oriented Programming"

Class Attributes
Property Attributes
"Add Button to MATLAB System Block" (Simulink)

matlab.system.display.Header class

Package: matlab.system.display

Header for System objects properties

Syntax

```
matlab.system.display.Header(N1,V1,...Nn,Vn)
matlab.system.display.Header(Obj,...)
```

Description

`matlab.system.display.Header(N1,V1,...Nn,Vn)` specifies a header for the System object, with the header properties defined in Name-Value (`N`,`V`) pairs. You use `matlab.system.display.Header` within the `getHeaderImpl` method. The available header properties are

- `Title` — Header title. The default value is an empty character vector.
- `Text` — Header description. The default value is an empty character vector.
- `ShowSourceLink` — Show link to source code for the object.

`matlab.system.display.Header(Obj,...)` creates a header for the specified System object (`Obj`) and sets the following property values:

- `Title` — Set to the `Obj` class name.
- `Text` — Set to help summary for `Obj`.
- `ShowSourceLink` — Set to `true` if `Obj` is MATLAB code. In this case, the **Source Code** link is displayed. If `Obj` is P-coded and the source code is not available, set this property to `false`.

You can use `mfilename('class')` from within this method to get the name of the System object. If you set any Name-Value pairs, those property values override the default settings.

Examples

Define System Block Header

Define a header in your class definition file.

```
methods (Static, Access = protected)
   function header = getHeaderImpl
      header = matlab.system.display.Header(mfilename('class'), ...
          'Title','AlternativeTitle',...
          'Text','An alternative class description');
   end
end
```

The resulting output appears as follows. In this case, **Source code** appears because the `ShowSourceLink` property was set to `true`.

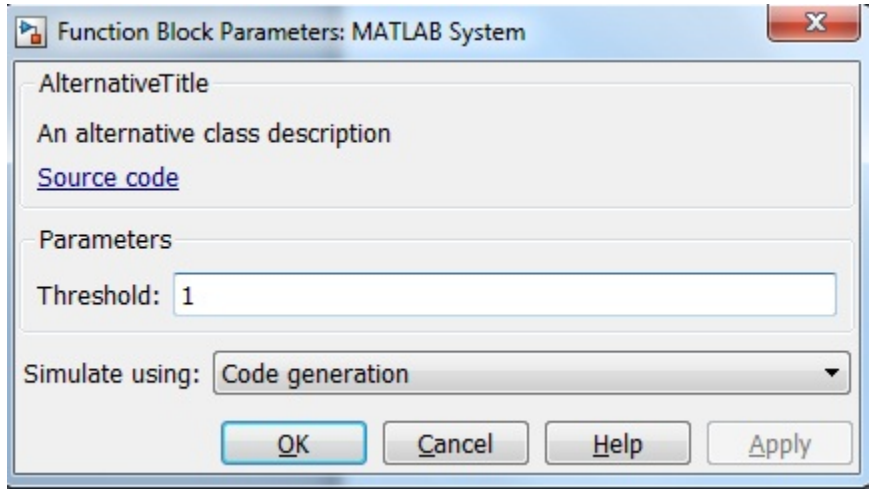

- "Object-Oriented Programming"
- "Add Header to MATLAB System Block" (Simulink)

See Also

See Also

matlab.system.display.Section | matlab.system.display.SectionGroup | getHeaderImpl

Topics

"Object-Oriented Programming"
"Add Header to MATLAB System Block" (Simulink)

matlab.system.display.Section class

Package: matlab.system.display

Property group section for System objects

Syntax

```
matlab.system.display.Section(N1,V1,...Nn,Vn)
matlab.system.display.Section(Obj,...)
```

Description

`matlab.system.display.Section(N1,V1,...Nn,Vn)` creates a property group section for displaying System object properties, which you define using property Name-Value pairs (`N`,`V`). You use `matlab.system.display.Section` to define property groups using the `getPropertyGroupsImpl` method. The available Section properties are

- `Title` — Section title. The default value is an empty character vector.
- `TitleSource` — Source of section title. Valid values are `'Property'` and `'Auto'`. The default value is `'Property'`, which uses the character vector from the `Title` property. If the `Obj` name is given, the default value is `Auto`, which uses the `Obj` name.
- `Description` — Section description. The default value is an empty character vector.
- `PropertyList` — Section property list as a cell array of property names. The default value is an empty array. If the `Obj` name is given, the default value is all eligible display properties.

Note: Certain properties are not eligible for display either in a dialog box or in the System object summary on the command-line. Property types that cannot be displayed are: hidden, abstract, private or protected access, discrete state, and continuous state. Dependent properties do not display in a dialog box, but do display in the command-line summary.

`matlab.system.display.Section(Obj,...)` creates a property group section for the specified System object (`Obj`) and sets the following property values:

- `TitleSource` — Set to `'Auto'`, which uses the `Obj` name.
- `PropertyList` — Set to all publicly-available properties in the `Obj`.

You can use `mfilename('class')` from within this method to get the name of the System object. If you set any Name-Value pairs, those property values override the default settings.

Methods

Examples

Define Property Groups

Define two property groups in your class definition file by specifying their titles and property lists.

```
methods (Static, Access = protected)
   function groups = getPropertyGroupsImpl
      valueGroup = matlab.system.display.Section(...
           'Title','Value parameters',...
           'PropertyList',{'StartValue','EndValue'});

      thresholdGroup = matlab.system.display.Section(...
           'Title','Threshold parameters',...
           'PropertyList',{'Threshold','UseThreshold'});
      groups = [valueGroup,thresholdGroup];
   end
end
```

When you specify the System object in the MATLAB System block, the resulting dialog box appears as follows.

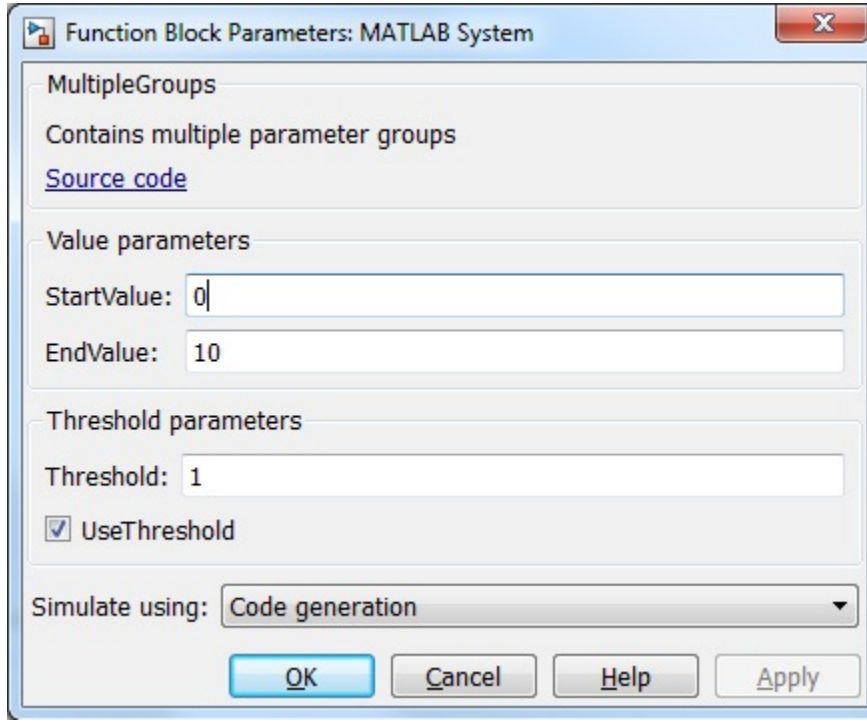

- "Add Property Groups to System Object and MATLAB System Block" (Simulink)

See Also

See Also

matlab.system.display.Header | matlab.system.display.SectionGroup | getPropertyGroupsImpl

Topics

"Add Property Groups to System Object and MATLAB System Block" (Simulink)

matlab.system.display.SectionGroup class

Package: matlab.system.display

Section group for System objects

Syntax

```
matlab.system.display.SectionGroup(N1,V1,...Nn,Vn)
matlab.system.display.SectionGroup(Obj,...)
```

Description

`matlab.system.display.SectionGroup(N1,V1,...Nn,Vn)` creates a group for displaying System object properties and display sections created with `matlab.system.display.Section`. You define such sections or properties using property Name-Value pairs (`N`,`V`). A section group can contain both properties and sections. You use `matlab.system.display.SectionGroup` to define section groups using the `getPropertyGroupsImpl` method. Section groups display as separate tabs in the MATLAB System block. The available Section properties are

- `Title` — Group title. The default value is an empty character vector.
- `TitleSource` — Source of group title. Valid values are `'Property'` and `'Auto'`. The default value is `'Property'`, which uses the character vector from the `Title` property. If the `Obj` name is given, the default value is `Auto`, which uses the `Obj` name. In the System object property display at the MATLAB command line, you can omit the default "Main" title for the first group of properties by setting `TitleSource` to `'Auto'`.
- `Description` — Group or tab description that appears above any properties or panels. The default value is an empty character vector.
- `PropertyList` — Group or tab property list as a cell array of property names. The default value is an empty array. If the `Obj` name is given, the default value is all eligible display properties.
- `Sections` — Group sections as an array of section objects. If the `Obj` name is given, the default value is the default section for the `Obj`.

`matlab.system.display.SectionGroup(Obj,...)` creates a section group for the specified System object (`Obj`) and sets the following property values:

- `TitleSource` — Set to `'Auto'`.
- `Sections` — Set to `matlab.system.display.Section` object for `Obj`.

You can use `mfilename('class')` from within this method to get the name of the System object. If you set any Name-Value pairs, those property values override the default settings.

Examples

Define Block Dialog Tabs

Define in your class definition file two tabs, each containing specific properties. For this example, you use the `matlab.system.display.SectionGroup`, `matlab.system.display.Section`, and `getPropertyGroupsImpl` methods.

```
methods (Static, Access = protected)
   function groups = getPropertyGroupsImpl
      valueGroup = matlab.system.display.Section(...
           'Title','Value parameters',...
           'PropertyList',{'StartValue','EndValue'});

      thresholdGroup = matlab.system.display.Section(...
           'Title','Threshold parameters',...
           'PropertyList',{'Threshold','UseThreshold'});

      mainGroup = matlab.system.display.SectionGroup(...
           'Title','Main', ...
           'Sections',[valueGroup,thresholdGroup]);

      initGroup = matlab.system.display.SectionGroup(...
           'Title','Initial conditions', ...
           'PropertyList',{'IC1','IC2','IC3'});

      groups = [mainGroup,initGroup];
   end
end
```

The resulting dialog appears as follows when you add the object to Simulink with the MATLAB System block.

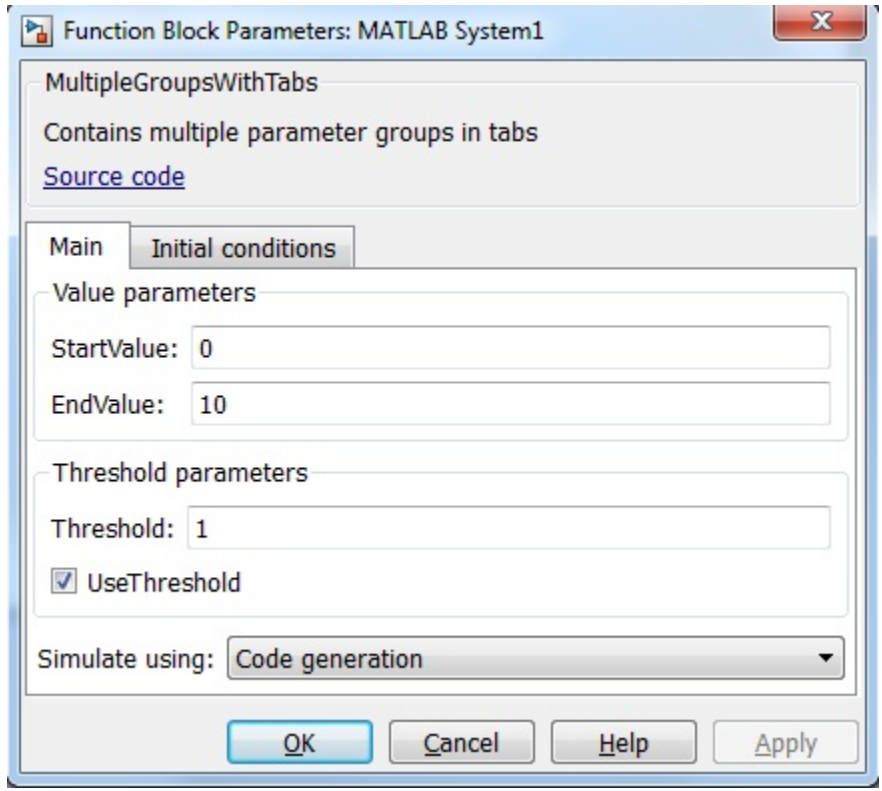
Function Block Parameters: MATLAB System1
MultipleGroupsWithTabs
Contains multiple parameter groups in tabs
Source code
Main
Initial conditions
Value parameters
StartValue:
0
EndValue:
10
Threshold parameters
Threshold:
1
UseThreshold
Simulate using:
Code generation
OK
Cancel
Help
Apply

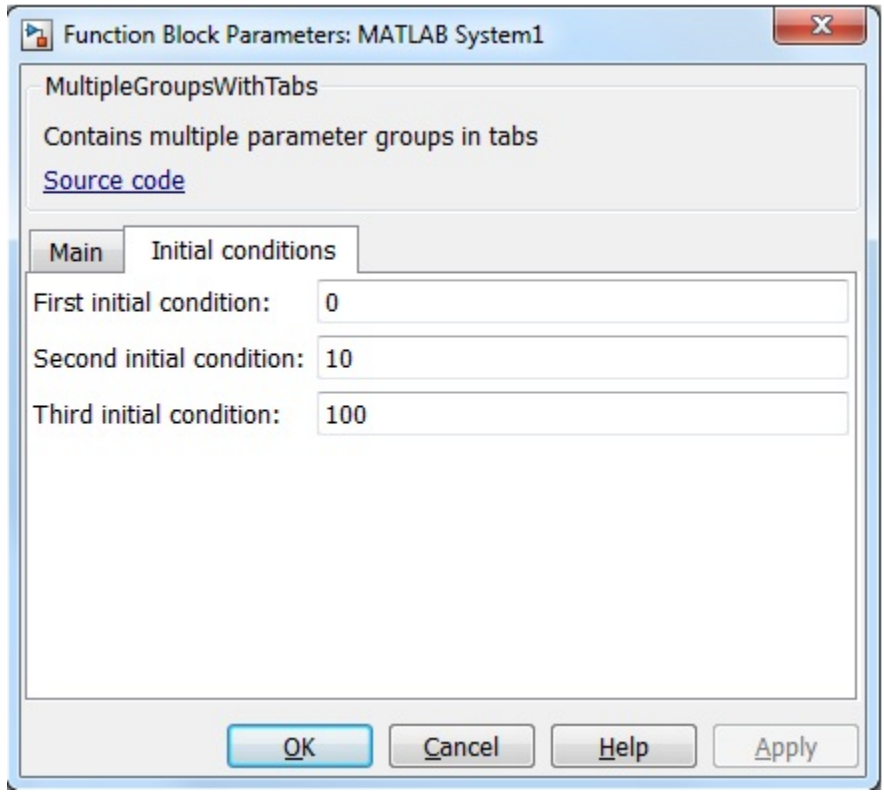

- "Add Property Groups to System Object and MATLAB System Block" (Simulink)

See Also

See Also

matlab.system.display.Header | matlab.system.display.Section | getPropertyGroupsImpl

Topics

"Add Property Groups to System Object and MATLAB System Block" (Simulink)

matlab.system.mixin.CustomIcon class

Package: matlab.system.mixin

Custom icon mixin class

Description

`matlab.system.mixin.CustomIcon` is a class that specifies the `getIcon` method. This method customizes the name of the icon used for the System object implemented through a MATLAB System block.

To use this method, you must subclass from this class in addition to the `matlab.System` base class. Type the following syntax as the first line of your class definition file, where `ObjectName` is the name of your object:

```
classdef ObjectName < matlab.system &...
    matlab.system.mixin.CustomIcon
```

Methods

getIconImpl	Name to display as block icon

See Also

See Also

matlab.System | matlab.system.display.Icon

Topics

"Add Text to Block Icon" (Simulink)

getIconImpl

Class: matlab.system.mixin.CustomIcon
Package: matlab.system.mixin

Name to display as block icon

Syntax

```
icon = getIconImpl(obj)
```

Description

`icon = getIconImpl(obj)` specifies the text or image to display on the block icon of the MATLAB System block. If you do not specify the `getIconImpl` method, the block displays the class name of the System object as the block icon. For example, if you specify `pkg.MyObject` in the MATLAB System block, the default icon is labeled `MyObject`

`getIconImpl` is called by the MATLAB System block during Simulink model compilation.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object handle

Output Arguments

`icon`

The text or image to display as the block icon. Each cell is displayed as a separate line.

Examples

Add System Block Icon Name

Specify in your class definition file the name of the block icon as `'Enhanced Counter'` using two lines.

```
methods (Access = protected)
   function icon = getIconImpl(~)
      icon = {'Enhanced','Counter'};
   end
end
```

Add Image to MATLAB System Block

Define an image in your class definition file.

```
    methods(Access = protected)
        function icon = getIconImpl(~)
            % Define icon for System block
            icon = matlab.system.display.Icon('my_icon.png');
        end
    end
```

The image now appears on the System block icon.



- "Customize System Block Appearance" (Simulink)

See Also

See Also

matlab.system.mixin.CustomIcon | matlab.system.display.Icon

Topics

"Customize System Block Appearance" (Simulink)

matlab.system.mixin.FiniteSource class

Package: matlab.system.mixin

Finite source mixin class

Description

`matlab.system.mixin.FiniteSource` is a class that specifies the `isDone` method, which reports the state of a finite data source, such as an audio file.

To use this method, you must subclass from this class in addition to the `matlab.System` base class. Type the following syntax as the first line of your class definition file, where `ObjectName` is the name of your object:

```
classdef ObjectName < matlab.System &...
    matlab.system.mixin.FiniteSource
```

Methods

isDoneImpl	End-of-data flag

See Also

See Also

matlab.System

Topics

"Object-Oriented Programming"
"Define Finite Source Objects"

isDoneImpl

Class: matlab.system.mixin.FiniteSource
Package: matlab.system.mixin

End-of-data flag

Syntax

```
status = isDoneImpl(obj)
```

Description

`status = isDoneImpl(obj)` specifies whether an the end of the data has been reached. The `isDone` method should return `false` when data from a finite source has been exhausted, typically by having read and output all data from the source. You should also define the result of future reads from an exhausted source in the `isDoneImpl` method.

`isDoneImpl` is called by the `isDone` method.

Note: You must set `Access = protected` for this method.

Input Arguments

`obj`

System object handle

Output Arguments

`status`

Logical value, `true` or `false`, that indicates if an end-of-data condition has occurred or not, respectively.

Examples

Check for End-of-Data

Set up the `isDoneImpl` method in your class definition file so the `isDone` method checks whether the object has completed eight iterations.

```
methods (Access = protected)
   function bdone = isDoneImpl(obj)
      bdone = obj.NumIters==8;
   end
end
```

- "Define Finite Source Objects"

See Also

See Also

matlab.system.mixin.FiniteSource

Topics

"Define Finite Source Objects"

matlab.system.mixin.Nondirect class

Package: matlab.system.mixin

Nondirect feedthrough mixin class

Description

`matlab.system.mixin.Nondirect` is a class that uses the `output` and `update` methods to process nondirect feedthrough data through a System object.

For System objects that use direct feedthrough, the object's input is needed to generate the output at that time. For these direct feedthrough objects, running the System object calculates the output and updates the state values. For nondirect feedthrough, however, the object's output depends only on the internal states at that time. The inputs are used to update the object states. For these objects, calculating the output with `outputImpl` is separated from updating the state values with `updateImpl`. If you use the `matlab.system.mixin.Nondirect` mixin and include the `stepImpl` method in your class definition file, an error occurs. In this case, you must include the `updateImpl` and `outputImpl` methods instead.

The following cases describe when System objects in Simulink use direct or nondirect feedthrough.

- System object supports code generation and does not inherit from the `Propagates` mixin — Simulink automatically infers the direct feedthrough settings from the System object code.
- System object supports code generation and inherits from the `Propagates` mixin — Simulink does not automatically infer the direct feedthrough settings. Instead, it uses the value returned by the `isInputDirectFeedthroughImpl` method.
- System object does not support code generation — Default `isInputDirectFeedthrough` method returns false, indicating that direct feedthrough is not enabled. To override the default behavior, implement the `isInputDirectFeedthroughImpl` method in your class definition file.

Use the `Nondirect` mixin to allow a System object to be used in a Simulink feedback loop. A delay object is an example of a nondirect feedthrough object.

To use this mixin, you must subclass from this class in addition to subclassing from the `matlab.System` base class. Type the following syntax as the first line of your class definition file, where `ObjectName` is the name of your object:

```
classdef ObjectName < matlab.system &...
    matlab.system.mixin.Nondirect
```

Methods

isInputDirectFeedthroughImpl	Direct feedthrough status of input
outputImpl	Output calculation from input or internal state of System object
updateImpl	Update object states based on inputs

See Also

See Also

matlab.system

Topics

"Use Update and Output for Nondirect Feedthrough" (Simulink)

isInputDirectFeedthroughImpl

Class: matlab.system.mixin.Nondirect
Package: matlab.system.mixin

Direct feedthrough status of input

Syntax

```
[flag1,...,flagN] = isInputDirectFeedthroughImpl(obj,u1,u2,...,uN)
```

Description

`[flag1,...,flagN] = isInputDirectFeedthroughImpl(obj,u1,u2,...,uN)` specifies whether each input is a direct feedthrough input. If direct feedthrough is `true`, the output depends on the input at each time instant.

Note: You must set `Access = protected` for this method.

You cannot modify any properties or implement or access tunable properties in this method.

If you do not include the `isInputDirectFeedthroughImpl` method in your System object class definition file, all inputs are assumed to be direct feedthrough.

The following cases describe when System objects in Simulink code generation use direct or nondirect feedthrough.

- System object supports code generation and does not inherit from the `Propagates` mixin — Simulink automatically infers the direct feedthrough settings from the System object code.
- System object supports code generation and inherits from the `Propagates` mixin — Simulink does not automatically infer the direct feedthrough settings. Instead, it uses the value returned by the `isInputDirectFeedthroughImpl` method.
- System object does not support code generation — Default `isInputDirectFeedthrough` method returns false, indicating that direct

feedthrough is not enabled. To override the default behavior, implement the `isInputDirectFeedthroughImpl` method in your class definition file.

`isInputDirectFeedthroughImpl` is called by the `isInputDirectFeedthrough` method.

Input Arguments

`obj`

System object handle

`u1,u2,...,uN`

Specifications of the inputs to the algorithm.

Output Arguments

`flag1,...,flagN`

Logical value or either `true` or `false`. This value indicates whether the corresponding input is direct feedthrough or not, respectively. The number of outputs must match the number of outputs returned by the `getNumOutputs` method.

Examples

Specify Input as Nondirect Feedthrough

Use `isInputDirectFeedthroughImpl` in your class definition file to mark the inputs as nondirect feedthrough.

```
methods (Access = protected)
   function flag = isInputDirectFeedthroughImpl(~,~)
      flag = false;
   end
end
```

- "Use Update and Output for Nondirect Feedthrough" (Simulink)

See Also

See Also

matlab.system.mixin.Nondirect

Topics

"Use Update and Output for Nondirect Feedthrough" (Simulink)

outputImpl

Class: matlab.system.mixin.Nondirect
Package: matlab.system.mixin

Output calculation from input or internal state of System object

Syntax

```
[y1,y2,...,yN] = outputImpl(obj,u1,u2,...,uN)
```

Description

`[y1,y2,...,yN] = outputImpl(obj,u1,u2,...,uN)` specifies the algorithm to output the System object states. . The output values are calculated from the states and property values. Any inputs that you set to nondirect feedthrough are ignored during output calculation.

`outputImpl` is called by the `output` method. It is also called before the `updateImpl` method. For sink objects, calling `updateImpl` before `outputImpl` locks the object. For all other types of objects, calling `updateImpl` before `outputImpl` causes an error.

Note: You must set `Access = protected` for this method.

You cannot modify any tunable properties in this method if its System object will be used in the Simulink MATLAB System block.

Input Arguments

obj

System object handle

u1,u2,...uN

Inputs from the algorithm. The number of inputs must match the number of inputs returned by the `getNumInputs` method. Nondirect feedthrough inputs are ignored

during normal execution of the System object. However, for code generation, you must provide these inputs even if they are empty.

Output Arguments

`y1,y2,...yN`

Outputs calculated from the specified algorithm. The number of outputs must match the number of outputs returned by the `getNumOutputs` method.

Examples

Set Up Output that Does Not Depend on Input

Specify in your class definition file that the output does not directly depend on the current input with the `outputImpl` method. `PreviousInput` is a property of the `obj`.

```
methods (Access = protected)
   function [y] = outputImpl(obj, ~)
      y = obj.PreviousInput(end);
   end
end
```

- "Use Update and Output for Nondirect Feedthrough" (Simulink)

See Also

See Also

matlab.system.mixin.Nondirect | matlab.system.mixin.Propagates

Topics

"Use Update and Output for Nondirect Feedthrough" (Simulink)

updateImpl

Class: matlab.system.mixin.Nondirect
Package: matlab.system.mixin

Update object states based on inputs

Syntax

```
updateImpl(obj,u1,u2,...,uN)
```

Description

`updateImpl(obj,u1,u2,...,uN)` specifies the algorithm to update the System object states. You use this method when your algorithm outputs depend only on the object's internal state and internal properties. Do not use this method to update the outputs from the inputs.

`updateImpl` is called by the `update` method and after the `outputImpl` method. For sink objects, calling `updateImpl` before `outputImpl` locks the object. For all other types of objects, calling `updateImpl` before `outputImpl` causes an error.

Note: You must set `Access = protected` for this method.

You cannot modify any tunable properties in this method if its System object will be used in the Simulink MATLAB System block.

Input Arguments

obj

System object handle

u1,u2,...uN

Inputs to the algorithm. The number of inputs must match the number of inputs returned by the `getNumInputs` method.

Examples

Set Up Output that Does Not Depend on Current Input

Update the object with previous inputs. Use `updateImpl` in your class definition file. This example saves the `u` input and shifts the previous inputs.

```
methods (Access = protected)
   function updateImpl(obj,u)
      obj.PreviousInput = [u obj.PreviousInput(1:end-1)];
   end
end
```

- "Use Update and Output for Nondirect Feedthrough" (Simulink)

See Also

See Also

matlab.system.mixin.Nondirect

Topics

"Use Update and Output for Nondirect Feedthrough" (Simulink)

matlab.system.mixin.Propagates class

Package: matlab.system.mixin

Signal characteristics propagation mixin class

Description

`matlab.system.mixin.Propagates` specifies the output size, data type, and complexity of a System object. Use this mixin class and its methods when you will include your System object in Simulink via the MATLAB System block. This mixin is called by the MATLAB System block during Simulink model compilation.

Implement the methods of this class when Simulink cannot infer the output specifications directly from the inputs or when you want bus support. If you do not include this mixin, Simulink cannot propagate the output or bus data type, an error occurs.

To use this mixin, subclass from this `matlab.system.mixin.Propagates` in addition to subclassing from the `matlab.System` base class. Type the following syntax as the first line of your class definition file. `ObjectName` is the name of your System object.

```
classdef ObjectName < matlab.System &...
    matlab.system.mixin.Propagates
```

Methods

getDiscreteStateSpecificationImpl	Discrete state size, data type, and complexity
getOutputDataTypeImpl	Data types of output ports
getOutputSizeImpl	Sizes of output ports
isOutputComplexImpl	Complexity of output ports
isOutputFixedSizeImpl	Fixed- or variable-size output ports
propagatedInputComplexity	Complexity of input during Simulink propagation

propagatedInputDataType	Data type of input during Simulink propagation
propagatedInputFixedSize	Fixed-size status of input during Simulink propagation
propagatedInputSize	Size of input during Simulink propagation

Note: If your System object has exactly one input and one output and no discrete property states, or if you do not need bus support, you do not have to implement any of these methods. The `matlab.system.mixin.Propagates` provides default values in these cases.

See Also

See Also

matlab.System

Topics

"Set Output Data Type" (Simulink)
"Set Output Size" (Simulink)
"Set Output Complexity" (Simulink)
"Specify Whether Output Is Fixed-Size or Variable-Size" (Simulink)
"Specify Discrete State Output Specification" (Simulink)

getDiscreteStateSpecificationImpl

Class: matlab.system.mixin.Propagates
Package: matlab.system.mixin

Discrete state size, data type, and complexity

Syntax

```
[sz,dt,cp] = getDiscreteStateSpecificationImpl(obj,propertyname)
```

Description

`[sz,dt,cp] = getDiscreteStateSpecificationImpl(obj,propertyname)` returns the size, data type, and complexity of the discrete state property. This property must be a discrete state property. You must define this method if your System object has discrete state properties and is used in the MATLAB System block. If you define this method for a property that is not discrete state, an error occurs during model compilation.

You always set the `getDiscreteStateSpecificationImpl` method access to `protected` because it is an internal method that users do not directly call or run.

`getDiscreteStateSpecificationImpl` is called by the MATLAB System block during Simulink model compilation.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method.

Input Arguments

`obj`

System object handle

propertyname

Name of discrete state property of the System object

Output Arguments

sz

Vector containing the length of each dimension of the property.

Default: `[1 1]`

dt

Data type of the property. For built-in data types, `dt` is a character vector. For fixed-point data types, `dt` is a numerictype object.

Default: `double`

cp

Complexity of the property as a scalar, logical value, where `true` = complex and `false` = real.

Default: `false`

Examples

Specify Discrete State Property Size, Data Type, and Complexity

Specify in your class definition file the size, data type, and complexity of a discrete state property.

```
methods (Access = protected)
   function [sz,dt,cp] = getDiscreteStateSpecificationImpl(~,name)
      sz = [1 1];
      dt = 'double';
      cp = false;
   end
```

```
end
```

- “Specify Discrete State Output Specification” (Simulink)

See Also

See Also

matlab.system.mixin.Propagates

Topics

“Specify Discrete State Output Specification” (Simulink)

getOutputDataTypeImpl

Class: matlab.system.mixin.Propagates
Package: matlab.system.mixin

Data types of output ports

Syntax

```
[dt_1,dt_2,...,dt_n] = getOutputDataTypeImpl(obj)
```

Description

`[dt_1,dt_2,...,dt_n] = getOutputDataTypeImpl(obj)` returns the data type of each output port as a character vector for built-in data types or as a numeric object for fixed-point data types. The number of outputs must match the value returned from the `getNumOutputs` method or the number of output arguments listed in the `stepImpl` method.

For System objects with one input and one output and where you want the input and output data types to be the same, you do not need to implement this method. In this case, `getOutputDataTypeImpl` assumes the input and output data types are the same and returns the data type of the input.

If your System object has more than one input or output, and you subclass from `matlab.system.mixin.Propagates`, you must set the output data types in the `getOutputDataTypeImpl` method. For Simulink, if the input and output data types are different, you might have to cast the output value to the data type of the appropriate `dt_n` output argument. You specify this casting in the `stepImpl` method. For bus output, you must specify the name of the output bus in `getOutputDataTypeImpl`.

If needed to determine the output data type, you can use `propagatedInputDataType` within the `getOutputDataTypeImpl` method to obtain the input type.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method.

If you are debugging your code and examine the data types before Simulink completes propagation, you might see outputs with empty, [ ], data types. This occurs because Simulink has not completed setting the output data types.

Input Arguments

`obj`

System object

Output Arguments

`dt_1,dt_2,...`

Data type of the property. For built-in data types, `dt` is a character vector. For fixed-point data types, `dt` is a numerictype object.

Examples

Specify Output Data Type

Specify, in your class definition file how to control the output data type from a MATLAB System block. This example shows how to use the `getOutputDataTypeImpl` method to change the output data type from single to double, or propagate the input as a double. It also shows how to cast the data type to change the output data type in the `stepImpl` method.

```
classdef DataTypeChange < matlab.System & ...
  matlab.system.mixin.Propagates

   properties(Nontunable)
      Quantize = false
   end

   methods(Access = protected)
      function y = stepImpl(obj,u)
         if obj.Quantize == true
            % Cast for output data type to differ from input.
```

```
            y = single(u);
         else
            % Propagate output data type.
            y = u;
         end
      end

      function out = getOutputDataTypeImpl(obj)
         if obj.Quantize == true
            out = 'single';
         else
            out = propagatedInputDataType(obj,1);
         end
      end
   end
end
```

Specify Bus Output

Specify, in your class definition file, that the System object data type is a bus. You must also include a property to specify the bus name.

```
properties(Nontunable)
   OutputBusName = 'myBus'
end

methods (Access = protected)
   function out = getOutputDataTypeImpl(obj)
      out = obj.OutputBusName;
   end
end
```

- "Set Output Data Type" (Simulink)

See Also

See Also

matlab.system.mixin.Propagates | propagatedInputDataType

Topics

"Set Output Data Type" (Simulink)

getOutputSizeImpl

Class: matlab.system.mixin.Propagates
Package: matlab.system.mixin

Sizes of output ports

Syntax

```
[sz_1,sz_2,...,sz_n] = getOutputSizeImpl(obj)
```

Description

`[sz_1,sz_2,...,sz_n] = getOutputSizeImpl(obj)` returns the size of each output port. The number of outputs must match the value returned from the `getNumOutputs` method or the number of output arguments listed in the `stepImpl` method.

For System objects with one input and one output and where you want the input and output sizes to be the same, you do not need to implement this method. In this case `getOutputSizeImpl` assumes the input and output sizes are the same and returns the size of the input. For variable-size inputs in MATLAB, the size varies each time you run your object. For variable-size inputs in Simulink, the output size is the maximum input size.

If your System object has more than one input or output or you need the output and input sizes to be different, you must implement the `getOutputSizeImpl` method to define the output size. You also must use the `propagatedInputSize` method if the output size differs from the input size.

During Simulink model compilation and propagation, the MATLAB System block calls the `getOutputSize` method, which then calls the `getOutputSizeImpl` method to determine the output size.

All inputs default to variable-size inputs For these inputs, the output size is the maximum input size.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method.

Input Arguments

obj

System object handle

Output Arguments

sz_1,sz_2,...

Vector containing the size of each output port.

Examples

Specify Output Size

Specify in your class definition file the size of a System object output.

```
methods (Access = protected)
   function sz_1 = getOutputSizeImpl(obj)
      sz_1 = [1 1];
   end
end
```

Specify Multiple Output Ports

Specify in your class definition file the sizes of multiple System object outputs.

```
methods (Access = protected)
   function [sz_1,sz_2] = getOutputSizeImpl(obj)
      sz_1 = propagatedInputSize(obj,1);
      sz_2 = [1 1];
   end
 end
```

Specify Output When Using Propagated Input Size

Specify in your class definition file the size of System object output when it is dependant on the propagated input size.

```
methods (Access = protected)
   function varargout = getOutputSizeImpl(obj)
      varargout{1} = propagatedInputSize(obj,1);
      if obj.HasSecondOutput
         varargout{2} = [1 1];
      end
   end
end
```

- "Set Output Size" (Simulink)

See Also

See Also

matlab.system.mixin.Propagates | propagatedInputSize

Topics

"Set Output Size" (Simulink)

isOutputComplexImpl

Class: matlab.system.mixin.Propagates
Package: matlab.system.mixin

Complexity of output ports

Syntax

```
[cp_1,cp_2,...,cp_n] = isOutputComplexImpl(obj)
```

Description

`[cp_1,cp_2,...,cp_n] = isOutputComplexImpl(obj)` returns whether each output port has complex data. The number of outputs must match the value returned from the `getNumOutputs` method or the number of output arguments listed in the `stepImpl` method.

For System objects with one input and one output and where you want the input and output complexities to be the same, you do not need to implement this method. In this case `isOutputComplexImpl` assumes the input and output complexities are the same and returns the complexity of the input.

If your System object has more than one input or output or you need the output and input complexities to be different, you must implement the `isOutputComplexImpl` method to define the output complexity. You also must use the `propagatedInputComplexity` method if the output complexity differs from the input complexity.

During Simulink model compilation and propagation, the MATLAB System block calls the `isOutputComplex` method, which then calls the `isOutputComplexImpl` method to determine the output complexity.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method.

Input Arguments

obj

System object handle

Output Arguments

cp_1,cp_2,...

Logical, scalar value indicating whether the specific output port is complex (`true`) or real (`false`).

Examples

Specify Output as Real-Valued

Specify in your class definition file that the output from a System object is a real value.

```
methods (Access = protected)
   function c1 = isOutputComplexImpl(obj)
       c1 = false;
   end
end
```

- "Set Output Complexity" (Simulink)

See Also

See Also

matlab.system.mixin.Propagates | propagatedInputComplexity

Topics

"Set Output Complexity" (Simulink)

isOutputFixedSizeImpl

Class: matlab.system.mixin.Propagates
Package: matlab.system.mixin

Fixed- or variable-size output ports

Syntax

```
[flag_1,flag_2,...flag_n] = isOutputFixedSizeImpl(obj)
```

Description

`[flag_1,flag_2,...flag_n] = isOutputFixedSizeImpl(obj)` returns whether each output port is fixed size. The number of outputs must match the value returned from the `getNumOutputs` method, which is the number of output arguments listed in the `stepImpl` method.

For System objects with one input and one output and where you want the input and output fixed sizes to be the same, you do not need to implement this method. In this case `isOutputFixedSizeImpl` assumes the input and output fixed sizes are the same and returns the fixed size of the input.

If your System object has more than one input or output or you need the output and input fixed sizes to be different, you must implement the `isOutputFixedSizeImpl` method to define the output fixed size. You also must use the `propagatedInputFixedSize` method if the output fixed size status differs from the input fixed size status.

During Simulink model compilation and propagation, the MATLAB System block calls the `isOutputFixedSize` method, which then calls the `isOutputFixedSizeImpl` method to determine the output fixed size.

All inputs default to variable-size inputs For these inputs, the output size is the maximum input size.

Note: You must set `Access = protected` for this method.

You cannot modify any properties in this method.

Input Arguments

`obj`

System object handle

Output Arguments

`flag_1,flag2,...`

Logical, scalar value indicating whether the specific output port is fixed size (`true`) or variable size (`false`).

Examples

Specify Output as Fixed Size

Specify in your class definition file that the output from a System object is of fixed size.

```
methods (Access = protected)
   function c1 = isOutputFixedSizeImpl(obj)
      c1 = true;
   end
end
```

- "Specify Whether Output Is Fixed-Size or Variable-Size" (Simulink)

See Also

See Also

matlab.system.mixin.Propagates | propagatedInputFixedSize

Topics

"Specify Whether Output Is Fixed-Size or Variable-Size" (Simulink)

propagatedInputComplexity

Class: matlab.system.mixin.Propagates
Package: matlab.system.mixin

Complexity of input during Simulink propagation

Syntax

```
flag = propagatedInputComplexity(obj,index)
```

Description

`flag = propagatedInputComplexity(obj,index)` returns `true` or `false` to indicate whether the input argument for the indicated System object is complex. `index` specifies the input for which to return the complexity flag.

You can use `propagatedInputComplexity` only from within the `isOutputComplexImpl` method in your class definition file. Use `isOutputComplexImpl` when:

- Your System object has more than one input or output.
- The input complexity determines the output complexity.
- The output complexity must differ from the input complexity.

Input Arguments

`obj`

System object

`index`

Index of the specified input. Do not count the `obj` in the `index`. The first input is always `obj`.

Output Arguments

flag

Complexity of the specified input, returned as `true` or `false`

Examples

Match Input and Output Complexity

Get the complexity of the second input when you run the object and set the output to match it. Assume that the first input has no impact on the output complexity.

```
methods (Access = protected)
   function outcomplx = isOutputComplexImpl(obj)
      outcomplx = propagatedInputComplexity(obj,2);
   end
end
```

- "Set Output Complexity" (Simulink)

See Also

See Also

matlab.system.mixin.Propagates | isOutputComplexImpl

Topics

"Set Output Complexity" (Simulink)

propagatedInputDataType

Class: matlab.system.mixin.Propagates
Package: matlab.system.mixin

Data type of input during Simulink propagation

Syntax

```
dt = propagatedInputDataType(obj,index)
```

Description

`dt = propagatedInputDataType(obj,index)` returns the data type of an input argument for a System object. `index` specifies the input for which to return the data type.

You can use `propagatedInputDataType` only from within `getOutputDataTypeImpl`. Use `getOutputDataTypeImpl` when:

- Your System object has more than one input or output.
- The input data type status determines the output data type.
- The output data type must differ from the input data type.

Input Arguments

`obj`

System object

`index`

Index of the specified input. Do not count the `obj` in the `index`. The first input is always `obj`.

Output Arguments

dt

Data type of the specified input, returned as a character vector for floating-point input or as a numerictype for fixed-point input.

Examples

Match Input and Output Data Type

Get the data type of the second input. If the second input data type is `double`, then the output data type is `int32`. For all other cases, the output data type matches the second input data type. Assume that the first input has no impact on the output.

```
methods (Access = protected)
   function dt = getOutputDataTypeImpl(obj)
       if strcmpi(propagatedInputDataType(obj,2),'double')
           dt = 'int32';
       else
           dt = propagatedInputDataType(obj,2);
       end
   end
end
```

- "Set Output Data Type" (Simulink)
- "Data Type Propagation" (Simulink)

See Also

See Also

matlab.system.mixin.Propagates | getOutputDataTypeImpl

Topics

"Set Output Data Type" (Simulink)
"Data Type Propagation" (Simulink)

propagatedInputFixedSize

Class: matlab.system.mixin.Propagates
Package: matlab.system.mixin

Fixed-size status of input during Simulink propagation

Syntax

```
flag = propagatedInputFixedSize(obj,index)
```

Description

`flag = propagatedInputFixedSize(obj,index)` returns `true` or `false` to indicate whether an input argument of a System object is fixed size. `index` specifies the input for which to return the fixed-size flag.

You can use `propagatedInputFixedSize` only from within `isOutputFixedSizeImpl`. Use `isOutputFixedSizeImpl` when:

- Your System object has more than one input or output.
- The input fixed-size status determines the output fixed-size status.
- The output fixed-size status must differ from the input fixed-size status.

Input Arguments

`obj`

System object

`index`

Index of the specified input. Do not count the `obj` in the `index`. The first input is always `obj`.

Output Arguments

flag

Fixed-size status of the specified input, returned as `true` or `false`.

Examples

Match Fixed-Size Status of Input and Output

Get the fixed-size status of the third input and set the output to match it. Assume that the first and second inputs have no impact on the output.

```
methods (Access = protected)
   function outtype = isOutputFixedSizeImpl(obj)
      outtype = propagatedInputFixedSize(obj,3)
   end
end
```

- "Specify Whether Output Is Fixed-Size or Variable-Size" (Simulink)

See Also

See Also

matlab.system.mixin.Propagates | isOutputFixedSizeImpl

Topics

"Specify Whether Output Is Fixed-Size or Variable-Size" (Simulink)

propagatedInputSize

Class: matlab.system.mixin.Propagates
Package: matlab.system.mixin

Size of input during Simulink propagation

Syntax

```
sz = propagatedInputSize(obj,index)
```

Description

`sz = propagatedInputSize(obj,index)` returns, as a vector, the input size of the specified System object. The`index` specifies the input for which to return the size information. (Do not count the `obj` in the `index`. The first input is always `obj`.)

You can use `propagatedInputSize` only from within the `getOutputSizeImpl` method in your class definition file. Use `getOutputSizeImpl` when:

- Your System object has more than one input or output.
- The input size determines the output size.
- The output size must differ from the input size.

Note: For variable-size inputs, the propagated input size from `propagatedInputSize` differs depending on the environment.

- MATLAB — `propagatedInputSize` returns the size of the inputs used when you run the object for the first time.

- Simulink — `propagatedInputSize` returns the upper bound of the input sizes.

Input Arguments

`obj`

System object

index

Index of the specified input

Output Arguments

sz

Size of the specified input, returned as a vector

Examples

Match Size of Input and Output

Get the size of the second input. If the first dimension of the second input has a size greater than 1, then set the output size to a 1 x 2 vector. For all other cases, the output is a 2 x 1 matrix. Assume that the first input has no impact on the output size.

```
methods (Access = protected)
   function outsz = getOutputSizeImpl(obj)
       sz = propagatedInputSize(obj,2);
       if sz(1) == 1
           outsz = [1,2];
       else
           outsz = [2,1];
       end
   end
end
```

- "Set Output Size" (Simulink)

See Also

See Also

matlab.system.mixin.Propagates | getOutputSizeImpl

Topics

"Set Output Size" (Simulink)

matlab.system.StringSet class

Package: matlab.system

Set of valid character vector values

Description

`matlab.system.StringSet` specifies a list of valid character vector values for a property. This class validates the character vector in the property and enables tab completion for the property value. A *StringSet* allows only predefined or customized character vectors as values for the property.

A `StringSet` uses two linked properties, which you must define in the same class. One is a public property that contains the current character vector value. This public property is displayed to the user. The other property is a hidden property that contains the list of all possible character vector values. This hidden property should also have the transient attribute so its value is not saved to disk when you save the System object.

The following considerations apply when using StringSets:

- The property that holds the current character vector can have any name.
- The property that holds the `StringSet` must use the same name as the property with the suffix "Set" appended to it. This property is an instance of the `matlab.system.StringSet` class.
- Valid character vectors, defined in the `StringSet`, must be declared using a cell array. The cell array cannot be empty nor can it have any empty character vectors. Valid character vectors must be unique and are case-sensitive.
- The property must be set to a valid `StringSet` value.

Examples

Set StringSet Property Values

Set the property, `Flavor`, and the `StringSet` property, `FlavorSet` in your class definition file.

```
properties
  Flavor = 'Chocolate'
end

properties (Hidden,Transient)
  FlavorSet = ...
    matlab.system.StringSet({'Vanilla','Chocolate'})
end
```

- "Limit Property Values to Finite List"

See Also

See Also

matlab.System

Topics

"Limit Property Values to Finite List"

clone

Create duplicate System object

Syntax

```
objClone = clone(obj)
```

Description

`objClone = clone(obj)` creates a copy of the System object `obj` that has the same property values and states as `obj`. If the object you clone is locked, the new object is also locked.

Examples

Copy an Object

Create a `Counter` object and set a property.

```
obj = Counter;
obj.UseIncrement = false
```

```
obj =

  Counter with properties:

    UseIncrement: false
    UseWrapValue: true
      StartValue: 1
       Increment: 1
       WrapValue: 10
```

Clone the object.

```
obj2 = clone(obj)
```

```
obj2 =

  Counter with properties:

    UseIncrement: false
    UseWrapValue: true
      StartValue: 1
       Increment: 1
       WrapValue: 10
```

- "System Design in MATLAB Using System Objects"

Input Arguments

`obj` — System object to clone
System object

System object that you want to clone.

Output Arguments

`objClone` — Cloned System object
System object

Copy of the System object that has the same properties and state as the original object.

See Also

See Also
`isLocked`

Topics
"System Design in MATLAB Using System Objects"

Introduced in R2010a

getNumInputs

Number of inputs required to call the System object

Syntax

```
num = getNumInputs(obj)
```

Description

`num = getNumInputs(obj)` returns an integer, `num`, representing the number of inputs (not counting the object itself) that you must use when calling the object. This value changes when you alter properties that turn inputs on or off.

If the object is a source object, `num` equals zero.

Examples

Get Number of Inputs for an Object

Create a `Counter` object and set a property.

```
obj = Counter;
obj.UseIncrement = false
```

```
obj =

  Counter with properties:

    UseIncrement: false
    UseWrapValue: true
      StartValue: 1
       Increment: 1
       WrapValue: 10
```

Query the number of inputs and outputs needed to call the object.

```
in = getNumInputs(obj)
out = getNumOutputs(obj)
```

```
in =

     1


out =

     1
```

- "System Design in MATLAB Using System Objects"

Input Arguments

`obj` — System object to query
System object

System object to query for the number of inputs.

Output Arguments

`num` — Number of inputs
nonnegative integer

The number of inputs required to call the object, returned as an integer.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

For details, see "System Objects in MATLAB Code Generation" (MATLAB Coder).

See Also

See Also

`getNumOutputs`

Topics

"System Design in MATLAB Using System Objects"

Introduced in R2010a

getNumOutputs

Number of outputs of from calling the System object

Syntax

```
num = getNumOutputs(obj)
```

Description

`num = getNumOutputs(obj)` returns the number of outputs, `num`, from calling the object. This value changes when you alter properties that turn outputs on or off.

If the object is a sink object, `num` equals zero.

Examples

Get Number of Outputs for an Object

Create a `Counter` object and set a property.

```
obj = Counter;
obj.UseIncrement = false
```

```
obj =

  Counter with properties:

    UseIncrement: false
    UseWrapValue: true
      StartValue: 1
       Increment: 1
       WrapValue: 10
```

Get the number of inputs and outputs needed to call the object.

```
in = getNumInputs(obj)
out = getNumOutputs(obj)
```

```
in =

     1


out =

     1
```

- "System Design in MATLAB Using System Objects"

Input Arguments

`obj` — System object to query
System object handle

System object to query for the number of outputs.

Output Arguments

`num` — Number of outputs
integer

The number of outputs from calling the System object.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

For details, see "System Objects in MATLAB Code Generation" (MATLAB Coder).

See Also

See Also

`getNumInputs`

Topics

"System Design in MATLAB Using System Objects"

Introduced in R2010a

isLocked

Determine if System object is locked

Syntax

```
tf = isLocked(obj)
```

Description

`tf = isLocked(obj)` returns logical `1` (`true`) if the input attributes and nontunable properties for the object are locked. Otherwise, `isLocked` return logical `0` (`false`).

The object performs an internal initialization the first time that you call the object. This initialization locks nontunable properties and input specifications, such as the dimensions, complexity, and data type of the input data. After locking, `isLocked` returns `1` (`true`). Calling `release` unlocks the object.

Examples

Check If Object Is Locked

Create a `Counter` object and set a property.

```
obj = Counter;
obj.UseIncrement = false
```

```
obj = 

  Counter with properties:

    UseIncrement: false
    UseWrapValue: true
      StartValue: 1
       Increment: 1
       WrapValue: 10
```

Call the object.

```
step(obj,1)
```

```
ans =

     2
```

Check if the object is locked

```
isLocked(obj)
```

```
ans =

  logical

   1
```

Release the object and check if the object is still locked.

```
reset(obj)
release(obj)
```

```
isLocked(obj)
```

```
ans =

  logical

   0
```

- "Methods Timing"
- "System Design in MATLAB Using System Objects"

Input Arguments

`obj` — System object to query

System object

System object whose locked status you want to query.

Output Arguments

`tf` — True or false
0 | 1

True or false result, returned as logical 1 or 0 indicating the locked status of the System object.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

For details, see "System Objects in MATLAB Code Generation" (MATLAB Coder).

See Also

Topics

"Methods Timing"
"System Design in MATLAB Using System Objects"

Introduced in R2010a

release

Release resources and allow changes to System object property values and input characteristics

Syntax

```
release(obj)
```

Description

`release(obj)` releases system resources such as memory, file handles, or hardware connections, and allows you to change properties and input characteristics.

Examples

Release and Reset an Object

Create a `Counter` object and set a property.

```
obj = Counter;
obj.UseIncrement = false
```

```
obj =

  Counter with properties:

    UseIncrement: false
    UseWrapValue: true
      StartValue: 1
       Increment: 1
       WrapValue: 10
```

Reset and release the object.

```
reset(obj)
```

```
release(obj)
```

- "System Design in MATLAB Using System Objects"

Input Arguments

`obj` — System object to release
System object

System object you want to release.

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

You can use `release` on a System object in code generated from MATLAB, but after you release its resources, you cannot use that System object again.

For details, see "System Objects in MATLAB Code Generation" (MATLAB Coder).

See Also

See Also
`reset`

Topics
"System Design in MATLAB Using System Objects"

Introduced in R2010a

reset

Reset internal states of System object

Syntax

```
reset(obj)
```

Description

`reset(obj)` resets the internal states and input properties of the System object to their initial values.

- If `obj` writes or reads a file, `reset` resets the object to the beginning of the file.
- If `obj` changes properties, `reset` resets the properties to their initial default values.
- If `obj` uses a random number generation seed, `reset` resets the seed property.

Examples

Reset Object

Create a `Counter` object and set a property.

```
obj = Counter;
obj.UseIncrement = false
```

```
obj =

  Counter with properties:

    UseIncrement: false
    UseWrapValue: true
      StartValue: 1
       Increment: 1
       WrapValue: 10
```

Reset and release the object.

```
reset(obj)
release(obj)
```

- "System Design in MATLAB Using System Objects"

Input Arguments

`obj` — System object to reset
System object

System object whose state you want to reset.

Extended Capabilities

C/C++ Code Generation
Generate C and C++ code using MATLAB® Coder™.

For details, see "System Objects in MATLAB Code Generation" (MATLAB Coder).

See Also

See Also
`release`

Topics
"System Design in MATLAB Using System Objects"

Introduced in R2010a

step

Run System object algorithm

Syntax

`step(obj, ___ )`

Description

`step(obj, ___ )` calls the System object and runs the algorithm. Depending on your System object, `step` can return output arguments.

Note: Starting in R2016b, instead of using the `step` method to perform the operation defined by the System object, you can call the object with arguments, as if it were a function. For example, `y = step(obj,x)` and `y = obj(x)` perform equivalent operations.

For details about the algorithm and input variables, see the individual System object reference pages.

Examples

Run an Object Using `step`

Create a `Counter` object and set a property.

```
obj = Counter;
obj.UseIncrement = false
```

```
obj = 

  Counter with properties:
```

```
    UseIncrement: false
    UseWrapValue: true
      StartValue: 1
       Increment: 1
       WrapValue: 10
```

Run the counter.

```
step(obj,1)
```

```
ans =

     2
```

- "System Design in MATLAB Using System Objects"

Input Arguments

`obj` — System object to run
System object

System object whose algorithm you want to run. Depending on the System object, additional input arguments might be required.

Extended Capabilities

C/C++ Code Generation

Generate C and C++ code using MATLAB® Coder™.

For details, see "System Objects in MATLAB Code Generation" (MATLAB Coder).

HDL Code Generation

Generate Verilog and VHDL code for FPGA and ASIC designs using HDL Coder™.

For details, see “HDL Code Generation for System Objects” (HDL Coder).

See Also

See Also

`reset`

Topics

“System Design in MATLAB Using System Objects”

Introduced in R2010a

matlab.system.display.Icon class

Package: matlab.system.display

Custom icon image

Syntax

```
icon = matlab.system.display.Icon(imageFile)
```

Description

`icon = matlab.system.display.Icon(imageFile)` sets the `imageFile` image as the MATLAB System block icon. To set the icon image, use the `icon` output argument from getIconImpl.

Input Arguments

`imageFile` — Image file
character array

Image file to display on the block icon, specified as a character array. If the image is not on the path, use the full path to your image file.

The image file must be in a file format supported for block masks. See "Draw Static Icon" (Simulink).

Example: `'image.png'`

Examples

Add Image to MATLAB System Block

Define an image in your class definition file.

```
methods(Access = protected)
```

```
        function icon = getIconImpl(~)
            % Define icon for MATLAB System block
            icon = matlab.system.display.Icon('my_icon.png');
        end
    end
```

The image now appears on the MATLAB System block icon.



- Class Attributes
- Property Attributes
- “Customize System Block Appearance” (Simulink)

See Also

See Also

matlab.system.mixin.CustomIcon | getIconImpl

Topics

Class Attributes
Property Attributes
“Customize System Block Appearance” (Simulink)

Introduced in R2017a